



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
SMARTPHONE

**FCC ID: BCG-E3176A
Model Name: A1902**

**Report Number: 11792476-S1V5
Issue Date: 9/5/2017**

Prepared for
**APPLE, INC.
1 INFINITE LOOP, MS 26A
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

Revision History

Rev.	Date	Revisions	Revised By
V1	8/22/2017	Initial Issue	--
V2	8/23/2017	Report revised based in Reviewer's comments: 1. Sec. 2: Updated 2. Sec 6.1: Updated device dimension. 3. Sec.6.3.1, 6.3.2, 6.3.3 and 6.3.4: Updated. 4. Sec 8.1: Updated. 5. Sec. 9.1: Updated. 6. Sec. 9.2: Updated. 7. Sec. 9.4: Updated. LTE Band 2, 7,30,41, and 66 8. Sec. 9.5: Updated. 9. Sec.9.8 : Corrected Typo 10. Sec. 10.18 : Updated 11. Sec. 10.19: Updated. 12. Sec. 10.25: Updated. 13. Sec. 12.1, 12.2, 12.3, 12.4 and 12.5: Updated. 14. Updated Appendixes A and C	Art Thammanavarat
V3	8/30/2017	Report revised based in Reviewer's comments: 1. Sec. 6.1: Revised note. 2. Sec. 6.3: Updated max. Power table. 3. Sec. 9: Added max. Power limit and note. 4. Sec. 10: Revised note.	Art Thammanavarat
V4	9/1/2017	Report revised based on Reviewer's comments: 1. Sec. 6.3: Updated note. 2. Sec. 7: Added Antenna diagram. 3. Sec. 9: Updated note. 4. Sec. 9.5: Updated note and table. 5. Sec. 10: Added descriptive notes.	Kenneth Mak
V5	9/5/2017	Report revised based on Reviewer's comments: 1. Sec. 2, 6.3, & 9: Updated notes.	Kenneth Mak

Table of Contents

1.	Attestation of Test Results	6
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	8
4.	SAR Measurement System & Test Equipment	9
4.1.	SAR Measurement System.....	9
4.2.	SAR Scan Procedures.....	10
4.3.	Test Equipment.....	12
5.	Measurement Uncertainty.....	14
6.	Device Under Test (DUT) Information	15
6.1.	DUT Description	15
6.2.	Wireless Technologies.....	16
6.3.	Maximum Output Power from Tune-up Procedure	17
6.3.1.	WLAN SISO (P_{Cell_ON})	19
6.3.2.	WLAN MIMO (P_{Cell_ON})	23
6.3.3.	WLAN SISO (P_{Cell_OFF})	27
6.3.4.	WLAN MIMO (P_{Cell_OFF})	31
6.3.5.	WLAN (P_{Cell_MAX}) and Bluetooth (P_{max}).....	35
6.4.	General LTE SAR Test and Reporting Considerations.....	37
6.5.	LTE (TDD) Considerations.....	40
7.	RF Exposure Conditions (Test Configurations)	41
8.	Dielectric Property Measurements & System Check	44
8.1.	Dielectric Property Measurements	44
8.2.	System Check.....	53
9.	Conducted Output Power Measurements.....	57
9.1.	GSM	57
9.2.	W-CDMA	59
9.3.	CDMA.....	66
9.4.	LTE.....	68
9.5.	LTE Rel. 11 Carrier Aggregation	95
9.6.	WLAN SISO (P_{Cell_ON})	118
9.7.	WLAN MIMO (P_{Cell_ON})	119
9.8.	WLAN SISO (P_{Cell_OFF})	120
9.9.	WLAN MIMO (P_{Cell_OFF})	121

9.10.	Bluetooth.....	122
10.	Measured and Reported (Scaled) SAR Results.....	124
10.1.	GSM850.....	126
10.2.	GSM1900.....	127
10.3.	W-CDMA Band V.....	128
10.4.	W-CDMA Band IV.....	129
10.5.	W-CDMA Band II.....	130
10.6.	CDMA BC0.....	131
10.7.	CDMA BC1.....	132
10.8.	CDMA BC10.....	133
10.9.	LTE Band 2 (20MHz Bandwidth).....	134
10.10.	LTE Band 4 (20MHz Bandwidth).....	134
10.11.	LTE Band 5 (10MHz Bandwidth).....	134
10.12.	LTE Band 7 (20MHz Bandwidth).....	135
10.13.	LTE Band 12 (10MHz Bandwidth).....	137
10.14.	LTE Band 13 (10MHz Bandwidth).....	138
10.15.	LTE Band 17 (10MHz Bandwidth).....	138
10.16.	LTE Band 25 (20MHz Bandwidth).....	139
10.17.	LTE Band 26 (10MHz Bandwidth).....	141
10.18.	LTE Band 30 (10MHz Bandwidth).....	142
10.19.	LTE Band 41 (20MHz Bandwidth).....	143
10.20.	LTE Band 66 (20MHz Bandwidth).....	145
10.21.	LTE-uplink 2CA Band 7 (20MHz + 20MHz BW).....	147
10.22.	LTE-uplink 2CA Band 41 (20MHz + 20MHz BW).....	147
10.23.	Wi-Fi (DTS Band).....	148
10.24.	Wi-Fi (U-NII-1 and U-NII-2A Band).....	150
10.25.	Wi-Fi (U-NII-2C Band).....	152
10.26.	Wi-Fi (U-NII-3 Band).....	154
10.27.	Wi-Fi Variant 2 Spot Check.....	156
10.28.	Bluetooth.....	158
11.	SAR Measurement Variability.....	160
12.	Simultaneous Transmission SAR Analysis.....	161
12.1.	Sum of the SAR for Worst Case Cell-Off (UNII & BT only).....	162
12.2.	Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), DTS and BT.....	162
12.3.	Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), UNII and BT.....	163
12.4.	Sum of the SAR for Worst Case Cell-On (Cellular LAT 1), DTS and BT.....	163

12.5.	<i>Sum of the SAR for Worst Case Cell-On (Cellular LAT 1), UNII and BT</i>	<i>164</i>
Appendixes		166
11792476-S1V2 SAR_App A Setup Photos		166
11792476-S1V1 SAR_App B System Check Plots		166
11792476-S1V2 SAR_App C Highest Test Plots.....		166
11792476-S1V1 SAR_App D Tissue Ingredients.....		166
11792476-S1V1 SAR_App E Probe Cal. Certificates		166
11792476-S1V2 SAR_App F Dipole Cal. Certificates		166

1. Attestation of Test Results

Applicant Name	APPLE, INC.			
FCC ID	BCG-E3176A			
Model Name	A1902			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	1.09	1.12	0.62	0.45
Body-worn	1.09	1.13	1.19	0.49
Hotspot	1.09	1.13	1.19	N/A
Simultaneous TX	Head	1.43	1.41	1.43
	Body-worn	1.57	1.55	1.57
	Hotspot	1.57	1.55	N/A
Date Tested	7/24/2017 to 8/16/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:	Prepared By:
	
Devin Chang Senior Engineer UL Verification Services Inc.	Chakrit Thammanavarat Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures & manufacturer KDB inquiries:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, LTE Considerations (LTE Band 41 Test Channels)

Additional Guidance: Operational Description and Manufacturer KDB inquiry

- Carrier Aggregation – KDB guidance to identify test cases with uplink carrier aggregation enabled in conjunction with FCC PAG Guidance for the test cases mentioned in Sec. 10.
- Detect Mode – KDB guidance related to SAR testing for proprietary detection mode used to determine proximity to head or body and set power accordingly for Wi-Fi and Cellular Transmitters.
- Cellular State Dependent Wi-Fi Power control – KDB guidance related to power control mechanism for Wi-Fi and Bluetooth transmitters based on the operational state of the Wi-Fi and Cellular Transmitters. The Wi-Fi and Bluetooth power configuration are listed as follows:
 - For Wi-Fi
 - $P_{\text{Cell_ON}}$: This will be used when both Cellular and Wi-Fi radios are ON.
 - $P_{\text{Cell_OFF}}$: This will be used when only Wi-Fi radio is ON
 - $P_{\text{Cell_MAX}}$: This will be used when the device is placed on the proprietary wireless charger and is therefore considered to be a mobile device. Refer to separate MPE report.
 - For Bluetooth
 - Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
 - Bluetooth P_{low} is used with Wi-Fi and Cellular antenna is active or Wi-Fi antenna inactive and Cellular antenna is active.
 - Bluetooth $P_{\text{standalone}}$ is used with Wi-Fi and Cellular antennas are inactive.
 - Bluetooth P_{max} is used when the device is placed on a proprietary wireless charger and is therefore considered to be a mobile device. Refer to separate MPE report.

The above power configurations for Wi-Fi and Bluetooth are triggered by all of the Cellular Bands with respect to the different Antennas and Exposure Conditions – Head, Body, and Hotspot has been verified and validated by the Manufacturer. Also, all of the UL CA conditions operate correctly with the intended maximum output power levels in simulated normal operating conditions using the Base Station Simulator and has been verified and validated by the Manufacturer.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 4
SAR Lab D	
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

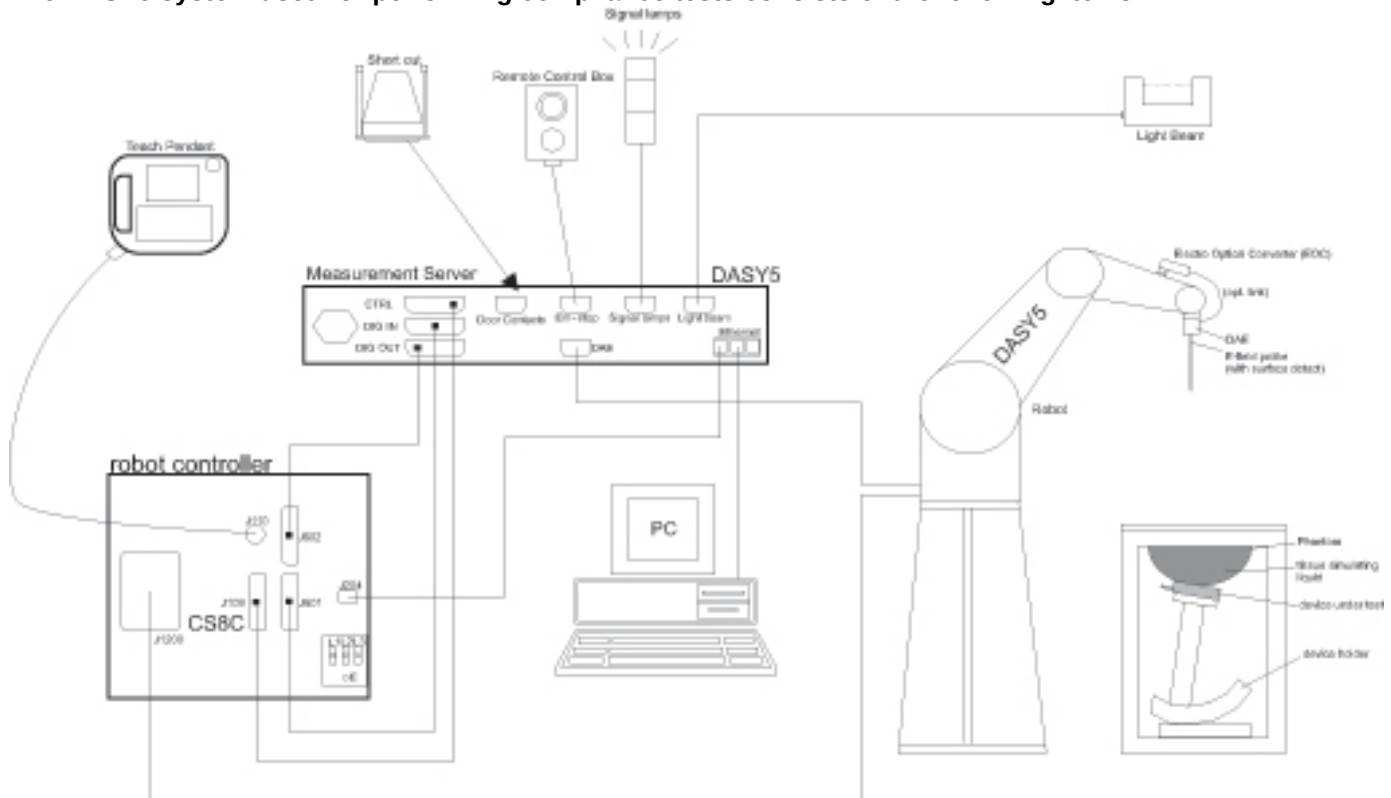

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	8/23/2017
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/8/2017
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Traceable Calibration Control Co.	4242	170064398	1/30/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/16/2018
Power Meter	Keysight	N1912A	MY50001018	10/11/2017
Power Sensor	Agilent	N1921A	MY53260001	10/17/2017
Power Sensor	Agilent	N1921A	MY53070007	3/1/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	HP	1611	215-02292	N/A
Synthesized Signal Generator	HP	8665B	3546A00784	9/2/2017
Power Meter	HP	437B	3125U11347	8/30/2017
Power Meter	HP	437B	3125U09516	9/27/2017
Power Sensor	HP	8481A	1926A16917	10/7/2017
Power Sensor	HP	8481A	2702A76223	9/14/2017
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	3929	3/15/2018
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7335	3/15/2018
E-Field Probe (SAR Lab C)	SPEAG	EX3DV4	3885	9/20/2017
E-Field Probe (SAR Lab D)	SPEAG	EX3DV4	7356	4/21/2018
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3772	2/16/2018
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3773	4/21/2018
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	3749	1/23/2018
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	3989	2/16/2018
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1434	4/19/2018
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1257	9/15/2017
Data Acquisition Electronics (SAR Lab C)	SPEAG	DAE4	1377	9/14/2017
Data Acquisition Electronics (SAR Lab D)	SPEAG	DAE4	1359	2/10/2018
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1357	2/13/2018
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1259	1/20/2018
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1352	11/11/2017
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1472	3/10/2018
System Validation Dipole	SPEAG	D750V3	1019	3/13/2018
System Validation Dipole	SPEAG	D835V2	4d002	11/8/2017
System Validation Dipole	SPEAG	D835V2	4d117	5/22/2018
System Validation Dipole	SPEAG	D1750V2	1050	4/18/2018
System Validation Dipole	SPEAG	D1750V2	1077	9/14/2017
System Validation Dipole	SPEAG	D1900V2	5d140	4/19/2018
System Validation Dipole	SPEAG	D1900V2	5d043	11/9/2017
System Validation Dipole	SPEAG	D2300V2	1058	8/18/2017
System Validation Dipole	SPEAG	D2450V2	706	5/9/2018
System Validation Dipole	SPEAG	D2450V2	748	2/8/2018
System Validation Dipole	SPEAG	D2600V2	1006	9/13/2017
System Validation Dipole	SPEAG	D5GHzV2	1003	2/13/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	9/22/2017
System Validation Dipole	SPEAG	D5GHzV2	1168	11/14/2017

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Power Meter	Agilent	N1911A	T1244	MY55196008	6/15/2018
Power Sensor	Agilent	N1921A	T309	MY52270022	12/17/2017
Power Sensor	Agilent	N1921A	T734	MY52200012	10/17/2017
Base Station Simulator	R & S	CMU200	T261	106301	11/28/2017
Base Station Simulator	R & S	CMW500	T957	134852	6/6/2018
Base Station Simulator	R & S	CMW500	T948	135393	5/15/2018
Base Station Simulator	R & S	CMW500	T232	104245	2/3/2018
Base Station Simulator	R & S	CMW500	T1526	147543	5/2/2018
Base Station Simulator	R & S	CMW500	N/A	145793	6/5/2018
Base Station Simulator	R & S	CMW500	N/A	112269	6/5/2018
Base Station Simulator	R & S	CMW500	N/A	157972	4/1/2018

Notes:

1. Equipment was not used after calibration due date.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Model A1902 is a smartphone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1x Advanced/EVDO Rev.A /WCDMA/HSPA+/DC-HSDPA/HSUPA, LTE FDD/TDD & Carrier Aggregation / TDSCDMA, VoLTE radio, IEEE 802.11a/b/g/n/ac radio 2x2 MIMO, Bluetooth radio, GPS and NFC. The rechargeable battery is not user accessible.

This device has two cellular antennas (UAT 1 and LAT 1) as well as multiple Wi-Fi/Bluetooth antennas (UAT 1 for Wi-Fi-BT 2.4GHz, UAT 2 for Wi-Fi 5GHz, and LAT 3 for Wi-Fi-BT 2.4/5GHz).

The device is capable of switching between the LAT and UAT based on signal strength.

The antenna switching is implemented with a physical, “break-before-make” switch such that only one antenna can be used for cellular transmission at a time.

In Airplay mode, the device uses the same 802.11 modes, modulation, MIMO, Channel Bandwidth, power and power control mechanism, etc. as Wi-Fi does. Therefore, Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

There are two vendors of the Wi-Fi/Bluetooth radio modules: Variant 1 and Variant 2 and they have the same mechanical outline, same on board antenna, matching circuit, antenna structure and same specification. Complete SAR evaluation is performed on Variant 1. The worst case configurations for each operation mode and frequency band are repeated for Variant 2. It is confirmed that Variant 1 represents the worst case.

Device Dimension	Overall (Length x Width): 143.3 mm x 70.8 mm Overall Diagonal: 153 mm Display Diagonal: 148.6 mm
Back Cover	☒ The rechargeable battery is not user accessible.
Battery Options	☒ The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
AirPlay	AirPlay mode enabled devices transfer data directly between each other ☒ AirPlay (Wi-Fi 2.4 GHz) ☒ AirPlay (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☒ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☐ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
CDMA (CDMA2000)	BC0 BC1 BC10	1xRTT (Voice & Data) 1xEV-DO Rel. 0 1xEV-DO Rev. A 1xAdvanced		100%
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 25 FDD Band 26 FDD Band 30 TDD Band 41 FDD Band 66	QPSK 16QAM 64QAM ☒ Rel. 11 Carrier Aggregation (2 Uplinks and 4 Downlinks), UE Category 10		100% (FDD) 63.3% (TDD) This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (config. 0 at 63.3%).
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		77.5% (DH5) ¹

Notes:

- The Bluetooth protocol is considered source-based averaging. Bluetooth EDR, GFSK (DH5) was verified to have the highest duty cycle of 77.5% and was considered and used for SAR Testing.

6.3. Maximum Output Power from Tune-up Procedure

The device utilizes three power modes; Mode A, Mode B and Mode C. Power selection is determined by the device's positioning and use case as described in Sec. 10. Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user. Mode C is used when the device is placed on a proprietary Apple wireless charger, as described in Sec. 6.3.5. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

This device has two cellular antennas (UAT 1 and LAT 1) as well as multiple Wi-Fi/Bluetooth antennas (UAT 1 for Wi-Fi-BT 2.4GHz, UAT 2 for Wi-Fi 5GHz, and LAT 3 for Wi-Fi-BT 2.4/5GHz). The selection between antennas UAT and LAT in application is based on RSSI based antenna selection. The full details of power selections are described in the operational description.

The maximum calibration level already includes component tolerance of $\pm 0.75\text{dB}$ for modulations other than 8PSK, where a $\pm 1\text{dB}$ tolerance is included. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

RF Air interface	Mode	Target Avg. RF Output Power (dBm)											
		MODE A						MODE B					
		UAT 1			LAT 1			UAT 1			LAT 1		
		MAX	Tolerance	Frame	MAX	Tolerance	Frame	MAX	Tolerance	Frame	MAX	Tolerance	Frame
GSM850	Voice/GPRS (1 slot)	27.8	± 0.75	18.8	27.8	± 0.75	18.8	30.3	± 0.75	21.3	30.3	± 0.75	21.3
	GPRS 2 slots	27.8	± 0.75	21.8	27.8	± 0.75	21.8	30.3	± 0.75	24.3	30.3	± 0.75	24.3
	EGPRS 1 slot	22.5	± 1.0	13.5	22.5	± 1.0	13.5	24.0	± 1.0	15.0	24.0	± 1.0	15.0
	EGPRS 2 slots	22.5	± 1.0	16.5	22.5	± 1.0	16.5	24.0	± 1.0	18.0	24.0	± 1.0	18.0
GSM1900	Voice/GPRS (1 slot)	26.5	± 0.75	17.5	26.5	± 0.75	17.5	29.8	± 0.75	20.8	29.8	± 0.75	20.8
	GPRS 2 slots	26.0	± 0.75	20.0	26.5	± 0.75	20.5	29.8	± 0.75	23.8	27.3	± 0.75	21.3
	EGPRS 1 slot	22.5	± 1.0	13.5	22.5	± 1.0	13.5	25.0	± 1.0	16.0	25.0	± 1.0	16.0
	EGPRS 2 slots	22.5	± 1.0	16.5	22.5	± 1.0	16.5	25.0	± 1.0	19.0	25.0	± 1.0	19.0

RF Air interface	Mode	Target Avg. RF Output Power (dBm)									
		MODE A						MODE B			
		UAT 1			LAT 1			UAT 1		LAT 1	
		MAX		Tolerance	MAX		Tolerance	MAX		Tolerance	
W-CDMA Band V	R99	24.3	±	0.75	24.3	±	0.75	24.8	±	0.75	24.8
	HSDPA	24.3	±	0.75	24.3	±	0.75	24.8	±	0.75	24.8
	HSUPA	24.3	±	0.75	24.3	±	0.75	24.8	±	0.75	24.8
	DC-HSDPA	24.3	±	0.75	24.3	±	0.75	24.8	±	0.75	24.8
	HSPA+	24.3	±	0.75	24.3	±	0.75	24.8	±	0.75	24.8
W-CDMA Band IV	R99	21.8	±	0.75	22.3	±	0.75	25.3	±	0.75	24.5
	HSDPA	21.8	±	0.75	22.3	±	0.75	25.3	±	0.75	24.5
	HSUPA	21.8	±	0.75	22.3	±	0.75	25.3	±	0.75	24.5
	DC-HSDPA	21.8	±	0.75	22.3	±	0.75	25.3	±	0.75	24.5
	HSPA+	21.8	±	0.75	22.3	±	0.75	25.3	±	0.75	24.5
W-CDMA Band II	R99	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	HSDPA	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	HSUPA	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	DC-HSDPA	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	HSPA+	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
CDMA BC0	1xRTT	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xAdvanced	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xEVDO Rel. 0	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xEVDO Rev. A	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
CDMA BC1	1xRTT	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	1xAdvanced	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	1xEVDO Rel. 0	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
	1xEVDO Rev. A	19.5	±	0.75	21.3	±	0.75	25.3	±	0.75	23.3
CDMA BC10	1xRTT	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xAdvanced	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xEVDO Rel. 0	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
	1xEVDO Rev. A	23.3	±	0.75	23.3	±	0.75	24.8	±	0.75	24.8
LTE Band 2	QPSK	19.5	±	0.75	20.8	±	0.75	25.3	±	0.75	23.3
LTE Band 4	QPSK	21.8	±	0.75	22.2	±	0.75	25.3	±	0.75	24.5
LTE Band 5	QPSK	24.0	±	0.75	24.0	±	0.75	24.8	±	0.75	24.8
LTE Band 7	QPSK	20.3	±	0.75	20.8	±	0.75	25.3	±	0.75	22.0
LTE Band 12	QPSK	24.0	±	0.75	24.0	±	0.75	24.8	±	0.75	24.8
LTE Band 13	QPSK	24.0	±	0.75	24.0	±	0.75	24.8	±	0.75	24.8
LTE Band 17	QPSK	24.0	±	0.75	24.0	±	0.75	24.8	±	0.75	24.8
LTE Band 25	QPSK	19.5	±	0.75	20.8	±	0.75	25.3	±	0.75	23.3
LTE Band 26	QPSK	24.0	±	0.75	24.0	±	0.75	24.8	±	0.75	24.8
LTE Band 30	QPSK	20.0	±	0.75	20.0	±	0.75	23.8	±	0.75	22.0
LTE Band 41	QPSK	21.3	±	0.75	21.4	±	0.75	25.3	±	0.75	23.3
LTE Band 66	QPSK	21.8	±	0.75	22.2	±	0.75	25.3	±	0.75	24.5
LTE-uplink 2CA Band 7	QPSK	19.8	±	0.75	19.8	±	0.75	23.8	±	0.75	22.0
LTE-uplink 2CA Band 41	QPSK	19.3	±	0.75	19.3	±	0.75	23.8	±	0.75	23.3

RF Air interface	Mode	Max. Avg. RF Output Power (dBm)			
		MODE A		MODE B	
		UAT 1	LAT 3	UAT 1	LAT 3
Bluetooth P _{low}	GFSK	10.0	10.0	10.0	10.0
Bluetooth P _{high}	GFSK	12.0	16.5	13.5	13.5
Bluetooth P _{standalone}	GFSK	14.5	19.5	16.5	16.5

Notes:

1. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
2. LTE-uplink 2CA are the total combined power of the UL CA.
3. Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
4. Bluetooth P_{low} is used with Wi-Fi and Cellular antennas are active or with Wi-Fi inactive and Cellular antenna is active.
5. Bluetooth P_{standalone} is used with Wi-Fi and Cellular antennas are inactive.

6.3.1. WLAN SISO (P_{Cell_ON})

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 DSSS	802.11b	1 Tx	1	2412	13.0	20.5	15.5	15.5	Yes
			2	2417	13.0	22.0	15.5	15.5	
			6	2437	13.0	22.0	15.5	15.5	
			11	2462	13.0	22.0	15.5	15.5	
			12	2467	13.0	20.5	15.5	15.5	
			13	2472	13.0	19.0	15.5	15.5	
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	1 Tx	1	2412	13.0	17.5	15.5	15.5	No
			2	2417	13.0	19.5	15.5	15.5	
			3	2422	13.0	21.5	15.5	15.5	
			6	2437	13.0	21.5	15.5	15.5	
			9	2452	13.0	21.5	15.5	15.5	
			10	2457	13.0	19.5	15.5	15.5	
			11	2462	13.0	17.5	15.5	15.5	
			12	2467	13.0	15.5	15.5	15.5	
	13	2472	8.0	8.0	8.0	8.0			
	802.11n	1 Tx HT20	1	2412	13.0	17.5	15.5	15.5	No
			2	2417	13.0	19.5	15.5	15.5	
			3	2422	13.0	21.5	15.5	15.5	
			6	2437	13.0	21.5	15.5	15.5	
			9	2452	13.0	21.5	15.5	15.5	
			10	2457	13.0	19.5	15.5	15.5	
			11	2462	13.0	17.5	15.5	15.5	
			12	2467	13.0	15.5	15.5	15.5	
	13	2472	8.0	8.0	8.0	8.0			

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
2. Sec. 5.2.2. of KDB 248227 D01 states: When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	1 Tx	36	5180	14.5	19.0	10.5	11.3	No
			40	5200	14.5	21.0	10.5	11.3	
			44	5220	14.5	21.0	10.5	11.3	
			48	5240	14.5	21.0	10.5	11.3	
	802.11n	1 Tx HT20	36	5180	14.5	19.0	10.5	11.3	No
			40	5200	14.5	21.0	10.5	11.3	
			44	5220	14.5	21.0	10.5	11.3	
			48	5240	14.5	21.0	10.5	11.3	
		1 Tx HT40	38	5190	14.5	18.0	10.5	11.3	No
			46	5230	14.5	19.5	10.5	11.3	
	802.11ac	1 Tx VHT20	36	5180	14.5	19.0	10.5	11.3	No
			40	5200	14.5	21.0	10.5	11.3	
			44	5220	14.5	21.0	10.5	11.3	
			48	5240	14.5	21.0	10.5	11.3	
		1 Tx VHT40	38	5190	14.5	18.0	10.5	11.3	No
			46	5230	14.5	19.5	10.5	11.3	
		1 Tx VHT80	42	5210	14.5	17.5	10.5	11.3	No
5.3	802.11a	1 Tx	52	5260	15.0	21.0	11.0	11.3	Yes
			56	5280	15.0	21.0	11.0	11.3	
			60	5300	15.0	21.0	11.0	11.3	
			64	5320	15.0	19.0	11.0	11.3	
	802.11n	1 Tx HT20	52	5260	15.0	21.0	11.0	11.3	No
			56	5280	15.0	21.0	11.0	11.3	
			60	5300	15.0	21.0	11.0	11.3	
			64	5320	15.0	19.0	11.0	11.3	
		1 Tx HT40	54	5270	15.0	19.5	11.0	11.3	No
			62	5310	15.0	18.0	11.0	11.3	
	802.11ac	1 Tx VHT20	52	5260	15.0	21.0	11.0	11.3	No
			56	5280	15.0	21.0	11.0	11.3	
			60	5300	15.0	21.0	11.0	11.3	
			64	5320	15.0	19.0	11.0	11.3	
		1 Tx VHT40	54	5270	15.0	19.5	11.0	11.3	No
			62	5310	15.0	18.0	11.0	11.3	
		1 Tx VHT80	58	5290	15.0	17.5	11.0	11.3	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	1 Tx	100	5500	16.0	19.0	10.5	12.5	Yes
			104	5520	16.0	21.0	10.5	12.5	
			108	5540	16.0	21.0	10.5	12.5	
			112	5560	16.0	21.0	10.5	12.5	
			116	5580	16.0	21.0	10.5	12.5	
			120	5600	16.0	21.0	10.5	12.5	
			124	5620	16.0	21.0	10.5	12.5	
			128	5640	16.0	21.0	10.5	12.5	
			132	5660	16.0	21.0	10.5	12.5	
			136	5680	16.0	21.0	10.5	12.5	
			140	5700	16.0	19.0	10.5	12.5	
			144	5720	16.0	21.0	10.5	12.5	
	802.11n	1 Tx HT20	100	5500	16.0	19.0	10.5	12.5	No
			104	5520	16.0	21.0	10.5	12.5	
			108	5540	16.0	21.0	10.5	12.5	
			112	5560	16.0	21.0	10.5	12.5	
			116	5580	16.0	21.0	10.5	12.5	
			120	5600	16.0	21.0	10.5	12.5	
			124	5620	16.0	21.0	10.5	12.5	
			128	5640	16.0	21.0	10.5	12.5	
			132	5660	16.0	21.0	10.5	12.5	
			136	5680	16.0	21.0	10.5	12.5	
			140	5700	16.0	19.0	10.5	12.5	
			144	5720	16.0	21.0	10.5	12.5	
		1 Tx HT40	102	5510	16.0	18.0	10.5	12.5	No
			110	5550	16.0	19.5	10.5	12.5	
			118	5590	16.0	19.5	10.5	12.5	
			126	5630	16.0	19.5	10.5	12.5	
			134	5670	16.0	19.5	10.5	12.5	
			142	5710	16.0	19.5	10.5	12.5	
	802.11ac	1 Tx VHT20	100	5500	16.0	19.0	10.5	12.5	No
			104	5520	16.0	21.0	10.5	12.5	
			108	5540	16.0	21.0	10.5	12.5	
			112	5560	16.0	21.0	10.5	12.5	
			116	5580	16.0	21.0	10.5	12.5	
			120	5600	16.0	21.0	10.5	12.5	
			124	5620	16.0	21.0	10.5	12.5	
			128	5640	16.0	21.0	10.5	12.5	
			132	5660	16.0	21.0	10.5	12.5	
			136	5680	16.0	21.0	10.5	12.5	
			140	5700	16.0	19.0	10.5	12.5	
			144	5720	16.0	21.0	10.5	12.5	
1 Tx VHT40		102	5510	16.0	18.0	10.5	12.5	No	
		110	5550	16.0	19.5	10.5	12.5		
		118	5590	16.0	19.5	10.5	12.5		
		126	5630	16.0	19.5	10.5	12.5		
		134	5670	16.0	19.5	10.5	12.5		
		142	5710	16.0	19.5	10.5	12.5		
1 Tx VHT80		106	5530	16.0	17.5	10.5	12.5	Yes	
		122	5610	16.0	19.5	10.5	12.5		
		138	5690	16.0	19.5	10.5	12.5		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	1 Tx	149	5745	16.0	21.5	10.5	12.0	Yes
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
	802.11n	1 Tx HT20	149	5745	16.0	21.5	10.5	12.0	No
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
		1 Tx HT40	151	5755	16.0	19.5	10.5	12.0	No
			159	5795	16.0	19.5	10.5	12.0	
	802.11ac	1 Tx VHT20	149	5745	16.0	21.5	10.5	12.0	No
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
		1 Tx VHT40	151	5755	16.0	19.5	10.5	12.0	No
			159	5795	16.0	19.5	10.5	12.0	
		1 Tx VHT80	155	5775	16.0	19.5	10.5	12.0	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.2. WLAN MIMO (P_{Cell_ON})

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

P_{Cell_ON} : This will be used when both Cellular and Wi-Fi radios are ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max.Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	2 Tx CDD	1	2412	13.0	16.5	15.5	15.5	Yes
			2	2417	13.0	18.5	15.5	15.5	
			3	2422	13.0	20.0	15.5	15.5	
			4	2427	13.0	21.5	15.5	15.5	
			6	2437	13.0	21.5	15.5	15.5	
			8	2447	13.0	21.5	15.5	15.5	
			9	2452	13.0	20.0	15.5	15.5	
			10	2457	13.0	18.5	15.5	15.5	
			11	2462	13.0	16.5	15.5	15.5	
			12	2467	13.0	14.5	14.5	14.5	
			13	2472	7.0	7.0	7.0	7.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	1	2412	13.0	16.5	15.5	15.5	No
			2	2417	13.0	18.5	15.5	15.5	
			3	2422	13.0	20.0	15.5	15.5	
			4	2427	13.0	21.5	15.5	15.5	
			6	2437	13.0	21.5	15.5	15.5	
			8	2447	13.0	21.5	15.5	15.5	
			9	2452	13.0	20.0	15.5	15.5	
			10	2457	13.0	18.5	15.5	15.5	
			11	2462	13.0	16.5	15.5	15.5	
			12	2467	13.0	14.5	14.5	14.5	
			13	2472	7.0	7.0	7.0	7.0	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	2 Tx CDD	36	5180	14.5	18.0	10.5	11.3	No
			40	5200	14.5	18.0	10.5	11.3	
			44	5220	14.5	18.0	10.5	11.3	
			48	5240	14.5	18.0	10.5	11.3	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	36	5180	14.5	18.0	10.5	11.3	No
			40	5200	14.5	18.0	10.5	11.3	
			44	5220	14.5	18.0	10.5	11.3	
			48	5240	14.5	18.0	10.5	11.3	
		2 Tx HT40 CDD/STBC/SDM	38	5190	14.5	17.0	10.5	11.3	No
			46	5230	14.5	19.5	10.5	11.3	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	36	5180	14.5	18.0	10.5	11.3	No
			40	5200	14.5	18.0	10.5	11.3	
			44	5220	14.5	18.0	10.5	11.3	
			48	5240	14.5	18.0	10.5	11.3	
		2 Tx VHT40 CDD/STBC/SDM	38	5190	14.5	17.0	10.5	11.3	No
			46	5230	14.5	19.5	10.5	11.3	
		2 Tx VHT80 CDD/STBC/SDM	42	5210	14.5	16.5	10.5	11.3	No
			5.3	802.11a	2 Tx CDD	52	5260	15.0	18.0
56	5280	15.0				18.0	11.0	11.3	
60	5300	15.0				18.0	11.0	11.3	
64	5320	15.0				18.0	11.0	11.3	
802.11n	2 Tx HT20 CDD/STBC/ SDM	52		5260	15.0	18.0	11.0	11.3	No
		56		5280	15.0	18.0	11.0	11.3	
		60		5300	15.0	18.0	11.0	11.3	
		64		5320	15.0	18.0	11.0	11.3	
	2 Tx HT40 CDD/STBC/SDM	54		5270	15.0	19.5	11.0	11.3	Yes
		62		5310	15.0	17.0	11.0	11.3	
802.11ac	2 Tx VHT20 CDD/STBC/ SDM	52		5260	15.0	18.0	11.0	11.3	No
		56		5280	15.0	18.0	11.0	11.3	
		60	5300	15.0	18.0	11.0	11.3		
		64	5320	15.0	18.0	11.0	11.3		
	2 Tx VHT40 CDD/STBC/SDM	54	5270	15.0	19.5	11.0	11.3	No	
		62	5310	15.0	17.0	11.0	11.3		
	2 Tx VHT80 CDD/STBC/SDM	58	5290	15.0	16.5	11.0	11.3	Yes	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	2 Tx CDD	100	5500	16.0	18.0	10.5	12.5	No
			104	5520	16.0	18.0	10.5	12.5	
			108	5540	16.0	18.0	10.5	12.5	
			112	5560	16.0	18.0	10.5	12.5	
			116	5580	16.0	18.0	10.5	12.5	
			120	5600	16.0	18.0	10.5	12.5	
			124	5620	16.0	18.0	10.5	12.5	
			128	5640	16.0	18.0	10.5	12.5	
			132	5660	16.0	18.0	10.5	12.5	
			136	5680	16.0	18.0	10.5	12.5	
			140	5700	16.0	18.0	10.5	12.5	
			144	5720	16.0	18.0	10.5	12.5	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	100	5500	16.0	18.0	10.5	12.5	No
			104	5520	16.0	18.0	10.5	12.5	
			108	5540	16.0	18.0	10.5	12.5	
			112	5560	16.0	18.0	10.5	12.5	
			116	5580	16.0	18.0	10.5	12.5	
			120	5600	16.0	18.0	10.5	12.5	
			124	5620	16.0	18.0	10.5	12.5	
			128	5640	16.0	18.0	10.5	12.5	
			132	5660	16.0	18.0	10.5	12.5	
			136	5680	16.0	18.0	10.5	12.5	
			140	5700	16.0	18.0	10.5	12.5	
			144	5720	16.0	18.0	10.5	12.5	
		2 Tx HT40 CDD/STBC/ SDM	102	5510	16.0	17.0	10.5	12.5	No
			110	5550	16.0	19.5	10.5	12.5	
			118	5590	16.0	19.5	10.5	12.5	
			126	5630	16.0	19.5	10.5	12.5	
			134	5670	16.0	19.5	10.5	12.5	
			142	5710	16.0	19.5	10.5	12.5	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	100	5500	16.0	18.0	10.5	12.5	No
			104	5520	16.0	18.0	10.5	12.5	
			108	5540	16.0	18.0	10.5	12.5	
			112	5560	16.0	18.0	10.5	12.5	
			116	5580	16.0	18.0	10.5	12.5	
			120	5600	16.0	18.0	10.5	12.5	
124			5620	16.0	18.0	10.5	12.5		
128			5640	16.0	18.0	10.5	12.5		
132			5660	16.0	18.0	10.5	12.5		
136			5680	16.0	18.0	10.5	12.5		
140			5700	16.0	18.0	10.5	12.5		
144			5720	16.0	18.0	10.5	12.5		
2 Tx VHT40 CDD/STBC/ SDM		102	5510	16.0	17.0	10.5	12.5	No	
		110	5550	16.0	19.5	10.5	12.5		
		118	5590	16.0	19.5	10.5	12.5		
		126	5630	16.0	19.5	10.5	12.5		
		134	5670	16.0	19.5	10.5	12.5		
		142	5710	16.0	19.5	10.5	12.5		
2 Tx VHT80 CDD/STBC/ SDM		106	5530	16.0	16.5	10.5	12.5	Yes	
		122	5610	16.0	19.5	10.5	12.5		
		138	5690	16.0	19.5	10.5	12.5		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	2 Tx CDD	149	5745	16.0	21.5	10.5	12.0	Yes
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	149	5745	16.0	21.5	10.5	12.0	No
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
		2 Tx HT40 CDD/STBC/SDM	151	5755	16.0	19.5	10.5	12.0	No
			159	5795	16.0	19.5	10.5	12.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	149	5745	16.0	21.5	10.5	12.0	No
			153	5765	16.0	21.5	10.5	12.0	
			157	5785	16.0	21.5	10.5	12.0	
			161	5805	16.0	21.5	10.5	12.0	
			165	5825	16.0	21.5	10.5	12.0	
		2 Tx VHT40 CDD/STBC/SDM	151	5755	16.0	19.5	10.5	12.0	No
			159	5795	16.0	19.5	10.5	12.0	
		2 Tx VHT80 CDD/STBC/SDM	155	5775	16.0	19.5	10.5	12.0	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.3. WLAN SISO ($P_{\text{Cell_OFF}}$)

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

$P_{\text{Cell_OFF}}$: This will be used when only Wi-Fi radios is ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 DSSS	802.11b	1 Tx	1	2412	18.3	20.5	18.8	20.5	Yes
			2	2417	18.3	22.0	18.8	20.8	
			6	2437	18.3	22.0	18.8	20.8	
			11	2462	18.3	22.0	18.8	20.8	
			12	2467	18.3	20.5	18.8	20.5	
			13	2472	18.3	19.0	18.8	19.0	
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	1 Tx	1	2412	17.5	17.5	17.5	17.5	No
			2	2417	18.3	19.5	18.8	19.5	
			3	2422	18.3	21.5	18.8	20.8	
			6	2437	18.3	21.5	18.8	20.8	
			9	2452	18.3	21.5	18.8	20.8	
			10	2457	18.3	19.5	18.8	19.5	
			11	2462	17.5	17.5	17.5	17.5	
			12	2467	15.5	15.5	15.5	15.5	
	13	2472	8.0	8.0	8.0	8.0			
	802.11n	1 Tx HT20	1	2412	17.5	17.5	17.5	17.5	No
			2	2417	18.3	19.5	18.8	19.5	
			3	2422	18.3	21.5	18.8	20.8	
			6	2437	18.3	21.5	18.8	20.8	
			9	2452	18.3	21.5	18.8	20.8	
			10	2457	18.3	19.5	18.8	19.5	
			11	2462	17.5	17.5	17.5	17.5	
			12	2467	15.5	15.5	15.5	15.5	
	13	2472	8.0	8.0	8.0	8.0			

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
2. Sec. 5.2.2. of KDB 248227 D01 states: When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	1 Tx	36	5180	19.0	19.0	14.8	18.0	No
			40	5200	21.0	21.0	14.8	18.0	
			44	5220	21.0	21.0	14.8	18.0	
			48	5240	21.0	21.0	14.8	18.0	
	802.11n	1 Tx HT20	36	5180	19.0	19.0	14.8	18.0	No
			40	5200	21.0	21.0	14.8	18.0	
			44	5220	21.0	21.0	14.8	18.0	
			48	5240	21.0	21.0	14.8	18.0	
		1 Tx HT40	38	5190	18.0	18.0	14.8	18.0	No
			46	5230	19.5	19.5	14.8	18.0	
	802.11ac	1 Tx VHT20	36	5180	19.0	19.0	14.8	18.0	No
			40	5200	21.0	21.0	14.8	18.0	
			44	5220	21.0	21.0	14.8	18.0	
			48	5240	21.0	21.0	14.8	18.0	
		1 Tx VHT40	38	5190	18.0	18.0	14.8	18.0	No
			46	5230	19.5	19.5	14.8	18.0	
		1 Tx VHT80	42	5210	17.5	17.5	14.8	17.5	No
5.3	802.11a	1 Tx	52	5260	21.0	21.0	15.3	18.0	Yes
			56	5280	21.0	21.0	15.3	18.0	
			60	5300	21.0	21.0	15.3	18.0	
			64	5320	19.0	19.0	15.3	18.0	
	802.11n	1 Tx HT20	52	5260	21.0	21.0	15.3	18.0	No
			56	5280	21.0	21.0	15.3	18.0	
			60	5300	21.0	21.0	15.3	18.0	
			64	5320	19.0	19.0	15.3	18.0	
		1 Tx HT40	54	5270	19.5	19.5	15.3	18.0	Yes
			62	5310	18.0	18.0	15.3	18.0	
	802.11ac	1 Tx VHT20	52	5260	21.0	21.0	15.3	18.0	No
			56	5280	21.0	21.0	15.3	18.0	
			60	5300	21.0	21.0	15.3	18.0	
			64	5320	19.0	19.0	15.3	18.0	
		1 Tx VHT40	54	5270	19.5	19.5	15.3	18.0	No
			62	5310	18.0	18.0	15.3	18.0	
		1 Tx VHT80	58	5290	17.5	17.5	15.3	17.5	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	1 Tx	100	5500	19.0	19.0	14.8	19.0	Yes
			104	5520	21.0	21.0	14.8	19.3	
			108	5540	21.0	21.0	14.8	19.3	
			112	5560	21.0	21.0	14.8	19.3	
			116	5580	21.0	21.0	14.8	19.3	
			120	5600	21.0	21.0	14.8	19.3	
			124	5620	21.0	21.0	14.8	19.3	
			128	5640	21.0	21.0	14.8	19.3	
			132	5660	21.0	21.0	14.8	19.3	
			136	5680	21.0	21.0	14.8	19.3	
			140	5700	19.0	19.0	14.8	19.0	
			144	5720	21.0	21.0	14.8	19.3	
	802.11n	1 Tx HT20	100	5500	19.0	19.0	14.8	19.0	No
			104	5520	21.0	21.0	14.8	19.3	
			108	5540	21.0	21.0	14.8	19.3	
			112	5560	21.0	21.0	14.8	19.3	
			116	5580	21.0	21.0	14.8	19.3	
			120	5600	21.0	21.0	14.8	19.3	
			124	5620	21.0	21.0	14.8	19.3	
			128	5640	21.0	21.0	14.8	19.3	
			132	5660	21.0	21.0	14.8	19.3	
			136	5680	21.0	21.0	14.8	19.3	
			140	5700	19.0	19.0	14.8	19.0	
			144	5720	21.0	21.0	14.8	19.3	
		1 Tx HT40	102	5510	18.0	18.0	14.8	18.0	No
			110	5550	19.5	19.5	14.8	19.3	
			118	5590	19.5	19.5	14.8	19.3	
			126	5630	19.5	19.5	14.8	19.3	
			134	5670	19.5	19.5	14.8	19.3	
			142	5710	19.5	19.5	14.8	19.3	
	802.11ac	1 Tx VHT20	100	5500	19.0	19.0	14.8	19.0	No
			104	5520	21.0	21.0	14.8	19.3	
			108	5540	21.0	21.0	14.8	19.3	
			112	5560	21.0	21.0	14.8	19.3	
			116	5580	21.0	21.0	14.8	19.3	
			120	5600	21.0	21.0	14.8	19.3	
124			5620	21.0	21.0	14.8	19.3		
128			5640	21.0	21.0	14.8	19.3		
132			5660	21.0	21.0	14.8	19.3		
136			5680	21.0	21.0	14.8	19.3		
140			5700	19.0	19.0	14.8	19.0		
144			5720	21.0	21.0	14.8	19.3		
1 Tx VHT40		102	5510	18.0	18.0	14.8	18.0	No	
		110	5550	19.5	19.5	14.8	19.3		
		118	5590	19.5	19.5	14.8	19.3		
		126	5630	19.5	19.5	14.8	19.3		
		134	5670	19.5	19.5	14.8	19.3		
		142	5710	19.5	19.5	14.8	19.3		
1 Tx VHT80		106	5530	17.5	17.5	14.8	17.5	Yes	
		122	5610	19.5	19.5	14.8	19.3		
		138	5690	19.5	19.5	14.8	19.3		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	1 Tx	149	5745	21.0	21.5	14.8	18.8	Yes
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
	802.11n	1 Tx HT20	149	5745	21.0	21.5	14.8	18.8	No
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
		1 Tx HT40	151	5755	19.5	19.5	14.8	18.8	No
			159	5795	19.5	19.5	14.8	18.8	
	802.11ac	1 Tx VHT20	149	5745	21.0	21.5	14.8	18.8	No
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
		1 Tx VHT40	151	5755	19.5	19.5	14.8	18.8	No
			159	5795	19.5	19.5	14.8	18.8	
		1 Tx VHT80	155	5775	19.5	19.5	14.8	18.8	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.4. WLAN MIMO (P_{Cell_OFF})

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

P_{Cell_OFF} : This will be used when only Wi-Fi radios is ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	2 Tx CDD	1	2412	16.5	16.5	16.5	16.5	Yes
			2	2417	18.3	18.5	18.5	18.5	
			3	2422	18.3	20.0	18.8	20.0	
			4	2427	18.3	21.5	18.8	20.8	
			6	2437	18.3	21.5	18.8	20.8	
			8	2447	18.3	21.5	18.8	20.8	
			9	2452	18.3	20.0	18.8	20.0	
			10	2457	18.3	18.5	18.5	18.5	
			11	2462	16.5	16.5	16.5	16.5	
			12	2467	14.5	14.5	14.5	14.5	
	13	2472	7.0	7.0	7.0	7.0			
	802.11g	2 Tx HT20 CDD/STBC/ SDM	1	2412	16.5	16.5	16.5	16.5	No
			2	2417	18.3	18.5	18.5	18.5	
			3	2422	18.3	20.0	18.8	20.0	
			4	2427	18.3	21.5	18.8	20.8	
			6	2437	18.3	21.5	18.8	20.8	
			8	2447	18.3	21.5	18.8	20.8	
			9	2452	18.3	20.0	18.8	20.0	
			10	2457	18.3	18.5	18.5	18.5	
			11	2462	16.5	16.5	16.5	16.5	
			12	2467	14.5	14.5	14.5	14.5	
			13	2472	7.0	7.0	7.0	7.0	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	2 Tx CDD	36	5180	18.0	18.0	14.8	18.0	No
			40	5200	18.0	18.0	14.8	18.0	
			44	5220	18.0	18.0	14.8	18.0	
			48	5240	18.0	18.0	14.8	18.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	36	5180	18.0	18.0	14.8	18.0	No
			40	5200	18.0	18.0	14.8	18.0	
			44	5220	18.0	18.0	14.8	18.0	
			48	5240	18.0	18.0	14.8	18.0	
		2 Tx HT40 CDD/STBC/SDM	38	5190	17.0	17.0	14.8	17.0	No
			46	5230	19.5	19.5	14.8	18.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	36	5180	18.0	18.0	14.8	18.0	No
			40	5200	18.0	18.0	14.8	18.0	
			44	5220	18.0	18.0	14.8	18.0	
			48	5240	18.0	18.0	14.8	18.0	
		2 Tx VHT40 CDD/STBC/SDM	38	5190	17.0	17.0	14.8	17.0	No
			46	5230	19.5	19.5	14.8	18.0	
		2 Tx VHT80 CDD/STBC/SDM	42	5210	16.5	16.5	14.8	16.5	No
			5.3	802.11a	2 Tx CDD	52	5260	18.0	18.0
56	5280	18.0				18.0	15.3	18.0	
60	5300	18.0				18.0	15.3	18.0	
64	5320	18.0				18.0	15.3	18.0	
802.11n	2 Tx HT20 CDD/STBC/ SDM	52		5260	18.0	18.0	15.3	18.0	No
		56		5280	18.0	18.0	15.3	18.0	
		60		5300	18.0	18.0	15.3	18.0	
		64		5320	18.0	18.0	15.3	18.0	
	2 Tx HT40 CDD/STBC/SDM	54		5270	19.5	19.5	15.3	18.0	Yes
		62		5310	17.0	17.0	15.3	17.0	
802.11ac	2 Tx VHT20 CDD/STBC/ SDM	52		5260	18.0	18.0	15.3	18.0	No
		56		5280	18.0	18.0	15.3	18.0	
		60	5300	18.0	18.0	15.3	18.0		
		64	5320	18.0	18.0	15.3	18.0		
	2 Tx VHT40 CDD/STBC/SDM	54	5270	19.5	19.5	15.3	18.0	No	
		62	5310	17.0	17.0	15.3	17.0		
	2 Tx VHT80 CDD/STBC/SDM	58	5290	16.5	16.5	15.3	16.5	No	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	2 Tx CDD	100	5500	18.0	18.0	14.8	18.0	No
			104	5520	18.0	18.0	14.8	18.0	
			108	5540	18.0	18.0	14.8	18.0	
			112	5560	18.0	18.0	14.8	18.0	
			116	5580	18.0	18.0	14.8	18.0	
			120	5600	18.0	18.0	14.8	18.0	
			124	5620	18.0	18.0	14.8	18.0	
			128	5640	18.0	18.0	14.8	18.0	
			132	5660	18.0	18.0	14.8	18.0	
			136	5680	18.0	18.0	14.8	18.0	
			140	5700	18.0	18.0	14.8	18.0	
			144	5720	18.0	18.0	14.8	18.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	100	5500	18.0	18.0	14.8	18.0	No
			104	5520	18.0	18.0	14.8	18.0	
			108	5540	18.0	18.0	14.8	18.0	
			112	5560	18.0	18.0	14.8	18.0	
			116	5580	18.0	18.0	14.8	18.0	
			120	5600	18.0	18.0	14.8	18.0	
			124	5620	18.0	18.0	14.8	18.0	
			128	5640	18.0	18.0	14.8	18.0	
			132	5660	18.0	18.0	14.8	18.0	
			136	5680	18.0	18.0	14.8	18.0	
			140	5700	18.0	18.0	14.8	18.0	
			144	5720	18.0	18.0	14.8	18.0	
		2 Tx HT40 CDD/STBC/ SDM	102	5510	17.0	17.0	14.8	17.0	No
			110	5550	19.5	19.5	14.8	19.3	
			118	5590	19.5	19.5	14.8	19.3	
			126	5630	19.5	19.5	14.8	19.3	
			134	5670	19.5	19.5	14.8	19.3	
			142	5710	19.5	19.5	14.8	19.3	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	100	5500	18.0	18.0	14.8	18.0	No
			104	5520	18.0	18.0	14.8	18.0	
			108	5540	18.0	18.0	14.8	18.0	
			112	5560	18.0	18.0	14.8	18.0	
			116	5580	18.0	18.0	14.8	18.0	
			120	5600	18.0	18.0	14.8	18.0	
			124	5620	18.0	18.0	14.8	18.0	
			128	5640	18.0	18.0	14.8	18.0	
			132	5660	18.0	18.0	14.8	18.0	
			136	5680	18.0	18.0	14.8	18.0	
			140	5700	18.0	18.0	14.8	18.0	
			144	5720	18.0	18.0	14.8	18.0	
2 Tx VHT40 CDD/STBC/ SDM		102	5510	17.0	17.0	14.8	17.0	No	
		110	5550	19.5	19.5	14.8	19.3		
		118	5590	19.5	19.5	14.8	19.3		
		126	5630	19.5	19.5	14.8	19.3		
		134	5670	19.5	19.5	14.8	19.3		
		142	5710	19.5	19.5	14.8	19.3		
2 Tx VHT80 CDD/STBC/ SDM		106	5530	16.5	16.5	14.8	16.5	Yes	
		122	5610	19.5	19.5	14.8	19.3		
		138	5690	19.5	19.5	14.8	19.3		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	2 Tx CDD	149	5745	21.0	21.5	14.8	18.8	Yes
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	149	5745	21.0	21.5	14.8	18.8	No
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
		2 Tx HT40 CDD/STBC/SDM	151	5755	19.5	19.5	14.8	18.8	No
			159	5795	19.5	19.5	14.8	18.8	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	149	5745	21.0	21.5	14.8	18.8	No
			153	5765	21.0	21.5	14.8	18.8	
			157	5785	21.0	21.5	14.8	18.8	
			161	5805	21.0	21.5	14.8	18.8	
			165	5825	21.0	21.5	14.8	18.8	
		2 Tx VHT40 CDD/STBC/SDM	151	5755	19.5	19.5	14.8	18.8	No
			159	5795	19.5	19.5	14.8	18.8	
		2 Tx VHT80 CDD/STBC/SDM	155	5775	19.5	19.5	14.8	18.8	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.5. WLAN ($P_{\text{Cell_MAX}}$) and Bluetooth (P_{max})

The maximum output power listed within this Section is only applicable when the device is placed on a proprietary wireless charger. The wireless charger is a desktop device. When the DUT is placed on top of the wireless charger during charging, the DUT shall be kept at least 20cm away from the user in this configuration and is considered to be a mobile device. Refer to the separate MPE Report for evaluation in this use case.

UAT 1 and LAT 3

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)			
			802.11b (1Tx)	802.11g (1Tx)	HT20 (1Tx)	HT20 (2Tx)
2.4	1	2412	20.5	17.5	17.5	16.5
	2	2417	22.0	19.5	19.5	18.5
	3	2422	22.0	21.5	21.5	20.0
	4	2427	22.0	21.5	21.5	21.5
	5	2432	22.0	21.5	21.5	21.5
	6	2437	22.0	21.5	21.5	21.5
	7	2442	22.0	21.5	21.5	21.5
	8	2447	22.0	21.5	21.5	21.5
	9	2452	22.0	21.5	21.5	20.0
	10	2457	22.0	19.5	19.5	18.5
	11	2462	22.0	17.5	17.5	16.5
	12	2467	20.5	15.5	15.5	14.5
	13	2472	19.0	8.0	8.0	7.0

UAT 2 and LAT 3

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)		
			802.11a (1Tx)	HT20 (1Tx)	HT20 (2Tx)
5GHz	36	5180	19.0	19.0	18.0
	40	5200	21.0	21.0	18.0
	44	5220	21.0	21.0	18.0
	48	5240	21.0	21.0	18.0
	52	5260	21.0	21.0	18.0
	56	5280	21.0	21.0	18.0
	60	5300	21.0	21.0	18.0
	64	5320	19.0	19.0	18.0
	100	5500	19.0	19.0	18.0
	104	5520	21.0	21.0	18.0
	108	5540	21.0	21.0	18.0
	112	5560	21.0	21.0	18.0
	116	5580	21.0	21.0	18.0
	120	5600	21.0	21.0	18.0
	124	5620	21.0	21.0	18.0
	128	5640	21.0	21.0	18.0
	132	5660	21.0	21.0	18.0
	136	5680	21.0	21.0	18.0
	140	5700	19.0	19.0	18.0
	144	5720	21.0	21.0	18.0
	149	5745	21.5	21.5	21.5
	153	5765	21.5	21.5	21.5
	157	5785	21.5	21.5	21.5
	161	5805	21.5	21.5	21.5
	165	5825	21.5	21.5	21.5

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)	
			HT40 (1Tx)	HT40 (2Tx)
5GHz	38	5190	18.0	17.0
	46	5230	19.5	19.5
	54	5270	19.5	19.5
	62	5310	18.0	17.0
	102	5510	18.0	17.0
	110	5550	19.5	19.5
	118	5590	19.5	19.5
	126	5630	19.5	19.5
	134	5670	19.5	19.5
	142	5710	19.5	19.5
	151	5755	19.5	19.5
	159	5795	19.5	19.5

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)	
			VHT80 (1Tx)	VHT80 (2Tx)
5GHz	42	5210	17.5	16.5
	58	5290	17.5	16.5
	106	5530	17.5	16.5
	122	5610	19.5	19.5
	138	5690	19.5	19.5
	155	5775	19.5	19.5

UAT 1 and LAT 3

RF Air interface	Mode	Max. Avg. RF Output Power (dBm)	
		MODE C	
		UAT 1	LAT 3
Bluetooth P _{max}	GFSK	20.0	20.0

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700/ 1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High				23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low						
	Mid			23230/ 782	23230/ 782		
	High						

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 17	Frequency range: 704 - 716 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low				23755/ 706.5			
	Mid			23790/ 710	23790/ 710			
	High				23825/ 713.5			
	Band 25	Frequency range: 1850 - 1915 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7	
	Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	
	High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3	
	Band 26	Frequency range: 814 - 849 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low			26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7	
	Mid			26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	
	High			26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3	
	Band 30	Frequency range: 2305 - 2315 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low							
	Mid			27710/ 2310	27710/ 2310			
	High							
	Band 41	Frequency range: 2496 - 2690 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
		Low	39750 / 2506.0					
		Low-Mid	40185 / 2549.5					
		Mid	40620 / 2593.0					
		Mid-High	41055 / 2636.5					
		High	41490 / 2680.0					
	Band 66	Frequency range: 1710 - 1780 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
		Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5		
		Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745		
		High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5		
LTE transmitter and antenna implementation	LTE can transmit from either UAT 1 or LAT 1. The antenna switching is implemented with a physical, “break-before-make” switch such that only one antenna can be used for LTE transmission at a time.							

Maximum power reduction (MPR)	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design. The manufacturer Target MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing.	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						

Notes:

1. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \# \text{ of S} + \# \text{ of U}$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used-configuration 0 at 63.3% duty cycle.


7. RF Exposure Conditions (Test Configurations)

WWAN antennas are located near the upper and lower edge of the device. The upper antenna for 2.4 GHz WLAN and Bluetooth (UAT 1) is shared and is located near the upper edge of the device, while the upper antenna for 5 GHz WLAN (UAT 2) is located near the upper left corner of the device. All WLAN bands and Bluetooth share the same lower antenna (LAT3), and this is located near the lower left corner of the device. Refer to Antenna Diagram below:

Refer to separate filing submission document for the proprietary design details of the antenna-to-antenna and antenna-to-edge(s) distances.

The Body-worn accessory test configurations were tested using a conservative minimum test separation distance of 5 mm.

Antenna Diagram

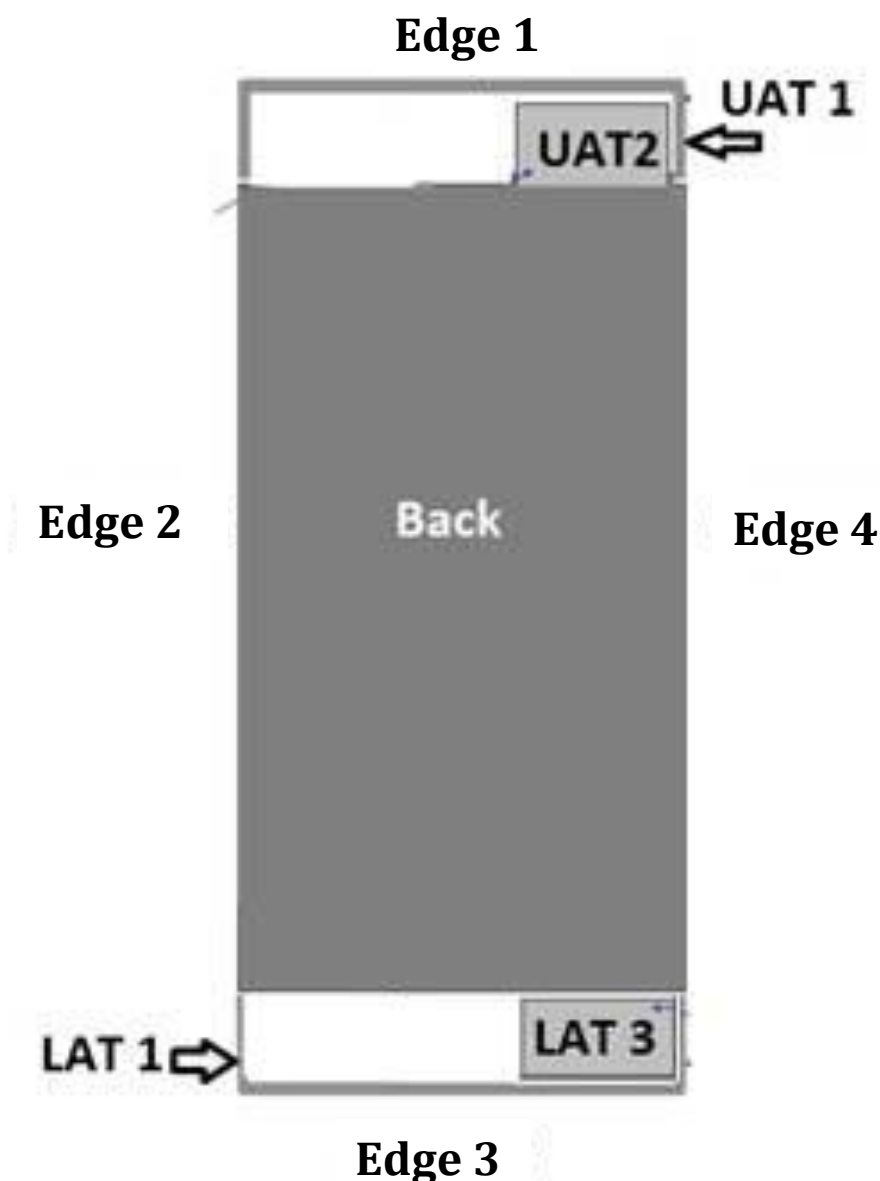

Upper Antenna

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (UAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
WLAN 2.4 GHz and Bluetooth (UAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
WLAN 5 GHz (UAT 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

Lower Antenna

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (LAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN and Bluetooth (LAT 3)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
A	7/24/2017	835	Body	835	53.41	55.20	-3.24	1.02	0.97	4.74
				805	53.73	55.33	-2.90	0.98	0.97	1.82
				905	52.74	55.00	-4.11	1.09	1.05	3.47
A	7/27/2017	2300	Body	2300	51.63	52.90	-2.41	1.87	1.80	3.91
				2350	51.47	52.84	-2.59	1.94	1.85	4.61
				2400	51.34	52.77	-2.71	1.99	1.90	4.85
A	7/27/2017	2300	Head	2300	39.22	39.47	-0.64	1.72	1.66	3.44
				2350	39.02	39.38	-0.93	1.78	1.71	4.00
				2400	38.83	39.30	-1.19	1.83	1.75	4.36
A	7/28/2017	835	Body	835	53.04	55.20	-3.91	1.00	0.97	3.00
				805	53.36	55.33	-3.57	0.97	0.97	0.07
				905	52.32	55.00	-4.87	1.07	1.05	1.47
A	7/30/2017	2300	Body	2300	50.87	52.90	-3.85	1.88	1.80	3.96
				2350	50.64	52.84	-4.16	1.93	1.85	4.06
				2400	50.52	52.77	-4.27	1.98	1.90	4.11
A	7/30/2017	2300	Head	2300	38.37	39.47	-2.79	1.67	1.66	0.50
				2350	38.15	39.38	-3.13	1.72	1.71	0.49
				2400	38.02	39.30	-3.25	1.76	1.75	0.71
A	7/31/2017	835	Body	835	54.46	55.20	-1.34	1.01	0.97	4.12
				805	54.76	55.33	-1.04	0.98	0.97	1.68
				905	53.90	55.00	-2.00	1.08	1.05	2.99
A	8/3/2017	2300	Head	2300	39.51	39.47	0.09	1.69	1.66	1.46
				2350	39.28	39.38	-0.27	1.75	1.71	2.18
				2400	39.12	39.30	-0.45	1.79	1.75	2.25
A	8/3/2017	2300	Body	2300	52.36	52.90	-1.03	1.87	1.80	3.52
				2350	52.15	52.84	-1.30	1.93	1.85	4.28
				2400	52.04	52.77	-1.39	1.98	1.90	4.37
A	8/3/2017	2600	Body	2600	51.73	52.51	-1.49	2.15	2.16	-0.45
				2495	52.00	52.64	-1.22	2.02	2.01	0.43
				2690	51.45	52.40	-1.81	2.26	2.29	-1.41
A	8/4/2017	835	Body	835	55.40	55.20	0.36	1.02	0.97	4.74
				805	55.60	55.33	0.48	0.98	0.97	1.59
				905	54.74	55.00	-0.47	1.09	1.05	3.37
A	8/7/2017	835	Head	835	40.86	41.50	-1.54	0.89	0.90	-1.27
				805	41.25	41.68	-1.03	0.91	0.90	1.96
				905	40.03	41.50	-3.54	0.98	0.97	0.87
A	8/9/2017	835	Body	835	53.22	55.20	-3.59	1.00	0.97	2.79
				805	53.52	55.33	-3.28	0.97	0.97	0.06
				905	52.63	55.00	-4.31	1.08	1.05	2.14
A	8/10/2017	2450	Body	2450	50.61	52.70	-3.97	2.03	1.95	4.10
				2400	50.76	52.77	-3.81	1.97	1.90	3.90
				2480	50.55	52.66	-4.01	2.07	1.99	3.76
A	8/10/2017	1900	Body	1900	51.30	53.30	-3.75	1.55	1.52	1.97
				1850	51.49	53.30	-3.40	1.50	1.52	-1.38
				1920	51.26	53.30	-3.83	1.56	1.52	2.83
A	8/14/2017	2600	Head	2600	37.36	39.01	-4.23	2.06	1.96	4.88
				2495	37.73	39.14	-3.61	1.93	1.85	4.56
				2690	37.06	38.90	-4.72	2.15	2.06	4.59
A	8/14/2017	2600	Body	2600	53.00	52.51	0.93	2.24	2.16	3.57
				2495	53.32	52.64	1.29	2.10	2.01	4.31
				2690	52.71	52.40	0.60	2.35	2.29	2.52
A	8/16/2017	2450	Head	2450	40.72	39.20	3.88	1.88	1.80	4.56
				2400	40.86	39.30	3.98	1.83	1.75	4.24
				2480	40.60	39.16	3.67	1.92	1.83	4.56

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
B	7/24/2017	750	Head	750	40.17	41.96	-4.27	0.90	0.89	0.36
				695	40.87	42.24	-3.25	0.85	0.89	-4.26
				790	39.69	41.76	-4.95	0.93	0.90	3.82
B	7/27/2017	1750	Head	1750	39.89	40.08	-0.49	1.34	1.37	-2.04
				1710	40.05	40.15	-0.24	1.31	1.35	-3.00
				1755	39.86	40.08	-0.54	1.35	1.37	-1.81
B	7/27/2017	1750	Body	1750	51.04	53.44	-4.49	1.48	1.49	-0.14
				1710	51.14	53.54	-4.49	1.45	1.46	-0.79
				1755	51.00	53.43	-4.54	1.49	1.49	0.12
B	7/28/2017	750	Body	750	54.92	55.55	-1.13	0.97	0.96	0.99
				695	55.50	55.76	-0.46	0.92	0.96	-3.86
				790	54.56	55.39	-1.50	1.01	0.97	4.85
B	7/30/2017	1750	Body	1750	51.62	53.44	-3.41	1.47	1.49	-0.95
				1710	51.73	53.54	-3.39	1.44	1.46	-1.68
				1755	51.62	53.43	-3.38	1.48	1.49	-0.75
B	7/30/2017	1750	Head	1750	40.83	40.08	1.86	1.33	1.37	-2.85
				1710	40.98	40.15	2.08	1.30	1.35	-3.82
				1755	40.83	40.08	1.88	1.34	1.37	-2.61
B	7/30/2017	750	Body	750	54.76	55.55	-1.42	0.97	0.96	0.44
				695	55.23	55.76	-0.95	0.91	0.96	-4.84
				790	54.50	55.39	-1.61	1.01	0.97	4.54
B	8/5/2017	1750	Body	1750	51.60	53.44	-3.44	1.46	1.49	-2.03
				1710	51.71	53.54	-3.42	1.42	1.46	-3.05
				1755	51.59	53.43	-3.44	1.47	1.49	-1.63
B	8/5/2017	1750	Head	1750	39.46	40.08	-1.56	1.33	1.37	-2.85
				1710	39.61	40.15	-1.34	1.29	1.35	-4.04
				1755	39.43	40.08	-1.61	1.34	1.37	-2.54
B	8/7/2017	750	Head	750	41.15	41.96	-1.93	0.93	0.89	3.80
				695	41.93	42.24	-0.74	0.87	0.89	-1.59
				790	40.57	41.76	-2.84	0.96	0.90	7.55
B	8/9/2017	2450	Body	2450	50.62	52.70	-3.95	2.01	1.95	2.92
				2400	50.72	52.77	-3.89	1.94	1.90	2.00
				2480	50.51	52.66	-4.09	2.04	1.99	2.20
B	8/10/2017	2450	Head	2450	37.55	39.20	-4.21	1.84	1.80	2.39
				2400	37.75	39.30	-3.94	1.79	1.75	2.13
				2480	37.46	39.16	-4.35	1.88	1.83	2.38
B	8/14/2017	2450	Head	2450	39.08	39.20	-0.31	1.85	1.80	2.83
				2400	39.32	39.30	0.06	1.79	1.75	2.30
				2480	38.98	39.16	-0.47	1.89	1.83	3.20
B	8/14/2017	2450	Body	2450	52.60	52.70	-0.19	2.02	1.95	3.69
				2400	52.74	52.77	-0.06	1.96	1.90	3.21
				2480	52.54	52.66	-0.23	2.06	1.99	3.46

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
C	7/27/2017	1900	Head	1900	38.16	40.00	-4.60	1.40	1.40	0.14
				1850	38.35	40.00	-4.13	1.36	1.40	-3.21
				1920	38.10	40.00	-4.75	1.42	1.40	1.43
C	7/27/2017	1900	Body	1900	51.01	53.30	-4.30	1.55	1.52	2.04
				1850	50.75	53.30	-4.78	1.49	1.52	-1.84
				1920	51.09	53.30	-4.15	1.57	1.52	3.29
C	7/31/2017	1900	Head	1900	39.27	40.00	-1.82	1.45	1.40	3.43
				1850	39.47	40.00	-1.33	1.40	1.40	0.21
				1920	39.18	40.00	-2.05	1.47	1.40	4.71
C	7/31/2017	1900	Body	1900	51.24	53.30	-3.86	1.57	1.52	3.42
				1850	51.35	53.30	-3.66	1.52	1.52	0.00
				1920	51.20	53.30	-3.94	1.59	1.52	4.74
C	8/4/2017	1900	Head	1900	40.29	40.00	0.72	1.43	1.40	1.79
				1850	40.53	40.00	1.33	1.38	1.40	-1.36
				1920	40.23	40.00	0.57	1.44	1.40	2.86
C	8/4/2017	1900	Body	1900	51.93	53.30	-2.57	1.57	1.52	3.36
				1850	52.02	53.30	-2.40	1.53	1.52	0.33
				1920	51.90	53.30	-2.63	1.58	1.52	4.21
C	8/8/2017	1900	Head	1900	38.47	40.00	-3.83	1.43	1.40	2.36
				1850	38.67	40.00	-3.33	1.39	1.40	-0.57
				1920	38.43	40.00	-3.93	1.45	1.40	3.57
C	8/8/2017	1900	Body	1900	51.52	53.30	-3.34	1.58	1.52	3.68
				1850	51.64	53.30	-3.11	1.54	1.52	0.99
				1920	51.49	53.30	-3.90	1.59	1.52	4.87
C	8/14/2017	1900	Head	1900	38.66	40.00	-3.35	1.40	1.40	0.07
				1850	38.75	40.00	-3.13	1.36	1.40	-3.00
				1920	38.60	40.00	-3.50	1.42	1.40	1.43
C	8/14/2017	1900	Body	1900	52.09	53.30	-2.27	1.57	1.52	3.49
				1850	52.09	53.30	-2.27	1.53	1.52	0.66
				1920	52.07	53.30	-2.31	1.59	1.52	4.74

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
D	7/24/2017	835	Head	835	40.79	41.50	-1.71	0.92	0.90	2.19
				805	41.20	41.68	-1.15	0.89	0.90	-0.74
				905	39.99	41.50	-3.64	0.98	0.97	1.04
D	7/27/2017	2600	Head	2600	37.59	39.01	-3.64	2.00	1.96	1.78
				2495	38.01	39.14	-2.90	1.88	1.85	1.91
				2690	37.25	38.90	-4.23	2.10	2.06	1.82
D	7/27/2017	2600	Body	2600	51.47	52.51	-1.98	2.24	2.16	3.57
				2495	51.84	52.64	-1.53	2.11	2.01	4.66
				2690	51.16	52.40	-2.36	2.35	2.29	2.65
D	7/27/2017	835	Head	835	41.26	41.50	-0.58	0.91	0.90	0.76
				805	41.65	41.68	-0.07	0.88	0.90	-1.82
				905	40.58	41.50	-2.22	0.97	0.97	0.21
D	7/30/2017	2600	Body	2600	51.11	52.51	-2.67	2.16	2.16	0.15
				2495	51.31	52.64	-2.53	2.04	2.01	1.33
				2690	50.84	52.40	-2.97	2.27	2.29	-0.71
D	7/31/2017	835	Head	835	41.44	41.50	-0.14	0.89	0.90	-1.26
				805	41.75	41.68	0.17	0.87	0.90	-3.56
				905	40.64	41.50	-2.07	0.95	0.97	-2.42
D	8/1/2017	2600	Head	2600	37.73	39.01	-3.28	2.02	1.96	2.90
				2495	38.08	39.14	-2.72	1.90	1.85	2.67
				2690	37.40	38.90	-3.85	2.13	2.06	3.28
D	8/3/2017	2600	Body	2600	51.27	52.51	-2.36	2.14	2.16	-0.96
				2495	51.54	52.64	-2.10	2.01	2.01	0.04
				2690	51.04	52.40	-2.59	2.24	2.29	-1.89
D	8/4/2017	2600	Head	2600	38.04	39.01	-2.49	2.04	1.96	3.87
				2495	38.44	39.14	-1.80	1.92	1.85	3.91
				2690	37.65	38.90	-3.21	2.14	2.06	3.81
D	8/5/2017	835	Head	835	42.05	41.50	1.33	0.89	0.90	-0.88
				805	42.35	41.68	1.61	0.86	0.90	-3.96
				905	40.95	41.50	-1.33	0.94	0.97	-3.19
D	8/7/2017	2600	Body	2600	51.72	52.51	-1.51	2.19	2.16	1.40
				2495	52.03	52.64	-1.16	2.07	2.01	2.67
				2690	51.46	52.40	-1.79	2.29	2.29	0.29
D	8/9/2017	2600	Head	2600	38.48	39.01	-1.36	2.01	1.96	2.54
				2495	38.83	39.14	-0.80	1.88	1.85	1.86
				2690	38.15	38.90	-1.92	2.11	2.06	2.60
D	8/9/2017	835	Head	835	40.98	41.50	-1.25	0.90	0.90	-0.26
				805	41.35	41.68	-0.79	0.87	0.90	-3.02
				905	40.22	41.50	-3.08	0.97	0.97	-0.76
D	8/9/2017	835	Body	835	53.67	55.20	-2.77	1.01	0.97	3.71
				805	53.99	55.33	-2.43	0.98	0.97	0.83
				905	53.12	55.00	-3.42	1.08	1.05	2.61
D	8/14/2017	1900	Head	1900	38.42	40.00	-3.95	1.43	1.40	1.86
				1850	38.57	40.00	-3.58	1.38	1.40	-1.50
				1920	38.40	40.00	-4.00	1.45	1.40	3.43
D	8/15/2017	2600	Head	2600	39.51	39.01	1.28	2.03	1.96	3.30
				2495	39.90	39.14	1.93	1.91	1.85	3.16
				2690	39.29	38.90	1.01	2.13	2.06	3.38
D	8/16/2017	2450	Head	2450	40.49	39.20	3.29	1.89	1.80	4.72
				2400	40.44	39.30	2.91	1.82	1.75	4.13
				2480	40.37	39.16	3.08	1.91	1.83	4.23

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
E	7/28/2017	5600	Head	5600	35.27	35.53	-0.74	5.28	5.06	4.42
				5500	35.45	35.65	-0.56	5.17	4.96	4.18
				5725	35.09	35.39	-0.85	5.43	5.19	4.66
E	7/28/2017	5600	Body	5600	47.13	48.48	-2.78	5.90	5.76	2.43
				5500	47.29	48.61	-2.72	5.77	5.64	2.28
				5725	47.03	48.31	-2.65	6.08	5.91	2.92
E	7/30/2017	5600	Head	5600	37.24	35.53	4.80	5.02	5.06	-0.80
				5500	37.36	35.65	4.80	4.91	4.96	-1.01
				5725	37.10	35.39	4.83	5.16	5.19	-0.52
E	7/30/2017	5600	Body	5600	47.14	48.48	-2.76	5.99	5.76	3.91
				5500	47.29	48.61	-2.72	5.84	5.64	3.45
				5725	46.97	48.31	-2.77	6.14	5.91	3.98
E	8/3/2017	5600	Body	5600	46.73	48.48	-3.61	5.97	5.76	3.56
				5500	46.88	48.61	-3.57	5.82	5.64	3.06
				5725	46.55	48.31	-3.64	6.14	5.91	3.98
E	8/3/2017	5600	Head	5600	37.06	35.53	4.29	4.94	5.06	-2.34
				5500	37.21	35.65	4.38	4.84	4.96	-2.48
				5725	36.87	35.39	4.18	5.08	5.19	-2.01
E	8/7/2017	5600	Body	5600	46.71	48.48	-3.65	6.01	5.76	4.30
				5500	46.91	48.61	-3.50	5.85	5.64	3.62
				5725	46.54	48.31	-3.66	6.17	5.91	4.44
E	8/7/2017	5600	Head	5600	36.26	35.53	2.04	4.82	5.06	-4.69
				5500	36.88	35.65	3.46	4.79	4.96	-3.33
				5725	36.16	35.39	2.17	5.07	5.19	-2.32
E	8/11/2017	5600	Head	5600	36.93	35.53	3.93	4.88	5.06	-3.64
				5500	37.11	35.65	4.10	4.77	4.96	-3.89
				5725	36.68	35.39	3.64	5.02	5.19	-3.16
E	8/11/2017	5600	Body	5600	47.19	48.48	-2.66	5.88	5.76	2.13
				5500	47.44	48.61	-2.41	5.73	5.64	1.44
				5725	46.85	48.31	-3.02	6.05	5.91	2.48
E	8/15/2017	5600	Head	5600	33.99	35.53	-4.34	4.86	5.06	-3.88
				5500	34.15	35.65	-4.20	4.75	4.96	-4.11
				5725	33.81	35.39	-4.47	5.01	5.19	-3.53
E	8/15/2017	5600	Body	5600	50.31	48.48	3.78	5.59	5.76	-2.97
				5500	50.48	48.61	3.84	5.42	5.64	-3.91
				5725	50.09	48.31	3.69	5.76	5.91	-2.42

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
F	7/28/2017	2450	Head	2450	39.23	39.20	0.08	1.88	1.80	4.44
				2400	39.42	39.30	0.31	1.82	1.75	3.79
				2480	39.13	39.16	-0.08	1.92	1.83	4.78
F	7/28/2017	2450	Body	2450	52.01	52.70	-1.31	2.03	1.95	3.85
				2400	52.15	52.77	-1.18	1.96	1.90	3.00
				2480	51.88	52.66	-1.49	2.07	1.99	3.71
F	7/30/2017	2450	Head	2450	38.24	39.20	-2.45	1.84	1.80	2.06
				2400	38.43	39.30	-2.21	1.78	1.75	1.56
				2480	38.11	39.16	-2.69	1.87	1.83	2.16
F	7/30/2017	2450	Body	2450	53.22	52.70	0.99	2.00	1.95	2.72
				2400	53.43	52.77	1.25	1.93	1.90	1.84
				2480	53.10	52.66	0.83	2.05	1.99	2.70
F	8/3/2017	2450	Head	2450	37.38	39.20	-4.64	1.88	1.80	4.39
				2400	37.53	39.30	-4.50	1.81	1.75	3.50
				2480	37.25	39.16	-4.88	1.91	1.83	4.07
F	8/3/2017	2450	Body	2450	50.64	52.70	-3.91	1.99	1.95	2.00
				2400	50.77	52.77	-3.79	1.91	1.90	0.84
				2480	50.51	52.66	-4.09	2.02	1.99	1.55
F	8/7/2017	2450	Body	2450	50.66	52.70	-3.87	1.99	1.95	2.05
				2400	50.80	52.77	-3.74	1.93	1.90	1.47
				2480	50.52	52.66	-4.07	2.03	1.99	2.00
F	8/7/2017	2450	Head	2450	37.87	39.20	-3.39	1.88	1.80	4.61
				2400	38.03	39.30	-3.22	1.83	1.75	4.36
				2480	37.72	39.16	-3.68	1.92	1.83	4.56
F	8/11/2017	2450	Body	2450	51.65	52.70	-1.99	1.90	1.95	-2.82
				2400	51.86	52.77	-1.73	1.84	1.90	-2.90
				2480	51.50	52.66	-2.21	1.93	1.99	-3.02
F	8/11/2017	2450	Head	2450	38.32	39.20	-2.24	1.89	1.80	4.89
				2400	38.53	39.30	-1.95	1.83	1.75	4.30
				2480	38.18	39.16	-2.51	1.92	1.83	4.83
F	8/14/2017	2450	Body	2450	52.40	52.70	-0.57	1.97	1.95	1.08
				2400	52.65	52.77	-0.23	1.90	1.90	0.31
				2480	52.34	52.66	-0.61	2.02	1.99	1.30
F	8/14/2017	2450	Head	2450	38.99	39.20	-0.54	1.88	1.80	4.28
				2400	39.21	39.30	-0.22	1.82	1.75	3.67
				2480	38.88	39.16	-0.72	1.92	1.83	4.51

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
G	7/28/2017	5800	Head	5800	34.65	35.30	-1.84	5.46	5.27	3.66
				5700	34.78	35.42	-1.81	5.36	5.16	3.79
				5850	34.65	35.30	-1.84	5.53	5.27	4.88
G	7/28/2017	5800	Body	5800	46.87	48.20	-2.76	6.17	6.00	2.78
				5700	46.98	48.34	-2.82	6.04	5.88	2.83
				5850	46.81	48.20	-2.88	6.25	6.00	4.10
G	7/30/2017	5800	Head	5800	36.10	35.30	2.27	5.17	5.27	-1.84
				5700	36.22	35.42	2.26	5.06	5.16	-2.01
				5850	36.08	35.30	2.21	5.22	5.27	-0.99
G	7/30/2017	5800	Body	5800	46.91	48.20	-2.68	5.98	6.00	-0.35
				5700	47.09	48.34	-2.59	5.86	5.88	-0.33
				5850	46.88	48.20	-2.74	6.05	6.00	0.78
G	8/3/2017	5800	Body	5800	46.86	48.20	-2.78	6.23	6.00	3.85
				5700	46.97	48.34	-2.84	6.09	5.88	3.68
				5850	46.77	48.20	-2.97	6.30	6.00	4.95
G	8/3/2017	5800	Head	5800	36.63	35.30	3.77	5.08	5.27	-3.62
				5700	36.72	35.42	3.67	4.97	5.16	-3.67
				5850	36.57	35.30	3.60	5.15	5.27	-2.35
G	8/7/2017	5800	Head	5800	36.46	35.30	3.29	5.04	5.27	-4.44
				5700	36.56	35.42	3.22	4.95	5.16	-4.04
				5850	36.46	35.30	3.29	5.09	5.27	-3.36
G	8/7/2017	5800	Body	5800	45.87	48.20	-4.83	6.16	6.00	2.62
				5700	46.00	48.34	-4.85	6.02	5.88	2.47
				5850	45.90	48.20	-4.77	6.22	6.00	3.72
G	8/11/2017	5800	Body	5800	45.91	48.20	-4.75	6.16	6.00	2.62
				5700	46.12	48.34	-4.60	6.04	5.88	2.76
				5850	45.86	48.20	-4.85	6.24	6.00	4.02
G	8/11/2017	5800	Head	5800	36.92	35.30	4.59	5.31	5.27	0.76
				5700	37.03	35.42	4.55	5.24	5.16	1.58
				5850	36.87	35.30	4.45	5.35	5.27	1.44
G	8/15/2017	5800	Body	5800	49.96	48.20	3.65	5.97	6.00	-0.48
				5700	50.17	48.34	3.78	5.82	5.88	-0.91
				5850	50.00	48.20	3.73	6.06	6.00	0.95
G	8/15/2017	5800	Head	5800	34.67	35.30	-1.78	5.14	5.27	-2.43
				5700	34.80	35.42	-1.75	5.03	5.16	-2.55
				5850	34.67	35.30	-1.78	5.21	5.27	-1.16
G	8/15/2017	2450	Body	2450	50.35	52.70	-4.46	1.98	1.95	1.49
				2400	50.24	52.77	-4.79	1.91	1.90	0.68
				2480	50.25	52.66	-4.58	2.02	1.99	1.61
G	8/16/2017	2450	Head	2450	38.16	39.20	-2.65	1.88	1.80	4.39
				2400	38.35	39.30	-2.42	1.82	1.75	4.00
				2480	38.00	39.16	-2.96	1.91	1.83	4.48

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
H	7/28/2017	5200	Head	5200	35.30	35.99	-1.92	4.71	4.65	1.31
				5150	35.37	36.05	-1.88	4.67	4.60	1.59
				5350	35.16	35.82	-1.84	4.87	4.80	1.28
H	7/29/2017	5200	Body	5200	47.11	49.02	-3.90	5.49	5.29	3.65
				5150	47.22	49.09	-3.80	5.42	5.24	3.49
				5350	46.85	48.82	-4.03	5.70	5.47	4.23
H	7/30/2017	5200	Head	5200	37.23	35.99	3.44	4.53	4.65	-2.56
				5150	37.28	36.05	3.42	4.47	4.60	-2.80
				5350	37.06	35.82	3.46	4.67	4.80	-2.80
H	7/30/2017	5200	Body	5200	47.71	49.02	-2.67	5.25	5.29	-0.88
				5150	47.77	49.09	-2.68	5.18	5.24	-1.13
				5350	47.53	48.82	-2.64	5.42	5.47	-1.00
H	8/3/2017	5200	Head	5200	36.79	35.99	2.22	4.54	4.65	-2.34
				5150	36.86	36.05	2.25	4.47	4.60	-2.80
				5350	36.62	35.82	2.24	4.69	4.80	-2.38
H	8/3/2017	5200	Body	5200	47.59	49.02	-2.92	5.36	5.29	1.18
				5150	47.68	49.09	-2.87	5.26	5.24	0.43
				5350	47.41	48.82	-2.88	5.55	5.47	1.40
H	8/7/2017	5200	Head	5200	36.42	35.99	1.19	4.60	4.65	-1.14
				5150	36.44	36.05	1.09	4.55	4.60	-1.00
				5350	36.31	35.82	1.37	4.69	4.80	-2.42
H	8/7/2017	5200	Body	5200	47.67	49.02	-2.75	5.43	5.29	2.63
				5150	47.64	49.09	-2.95	5.35	5.24	2.07
				5350	47.63	48.82	-2.43	5.65	5.47	3.28
H	8/10/2017	5600	Head	5600	36.15	35.53	1.73	4.88	5.06	-3.64
				5500	36.20	35.65	1.55	4.77	4.96	-3.79
				5725	36.02	35.39	1.78	5.01	5.19	-3.43
H	8/11/2017	5600	Body	5600	46.43	48.48	-4.22	6.00	5.76	4.13
				5500	46.68	48.61	-3.98	5.85	5.64	3.59
				5725	46.19	48.31	-4.39	6.20	5.91	4.98
H	8/14/2017	5200	Body	5200	51.14	49.02	4.33	5.18	5.29	-2.24
				5150	51.18	49.09	4.26	5.12	5.24	-2.24
				5350	50.87	48.82	4.21	5.33	5.47	-2.50
H	8/14/2017	5200	Head	5200	34.56	35.99	-3.97	4.50	4.65	-3.33
				5150	34.61	36.05	-3.99	4.44	4.60	-3.45
				5350	34.35	35.82	-4.10	4.61	4.80	-4.05

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
A	7/24/2017	Body	D835V2 SN:4d117	5/22/2018	1.010	10.10	10.39	-2.79	0.665	6.65	6.76	-1.63	1,2
A	7/27/2017	Head	D2300V2 SN:1058	8/18/2017	5.210	52.10	50.50	3.17	2.440	24.40	24.20	0.83	
A	7/27/2017	Body	D2300V2 SN:1058	8/18/2017	5.040	50.40	48.50	3.92	2.390	23.90	23.50	1.70	
A	7/28/2017	Body	D835V2 SN:4d002	11/8/2017	1.030	10.30	9.55	7.85	0.676	6.76	6.33	6.79	
A	7/30/2017	Body	D2300V2 SN:1058	8/18/2017	5.060	50.60	48.50	4.33	2.370	23.70	23.50	0.85	3,4
A	7/30/2017	Head	D2300V2 SN:1058	8/18/2017	5.070	50.70	50.50	0.40	2.380	23.80	24.20	-1.65	
A	7/31/2017	Body	D835V2 SN:4d002	11/8/2017	1.000	10.00	9.55	4.71	0.659	6.59	6.33	4.11	
A	8/3/2017	Head	D2300V2 SN:1058	8/18/2017	5.000	50.00	50.50	-0.99	2.350	23.50	24.20	-2.89	
A	8/3/2017	Body	D2300V2 SN:1058	8/18/2017	4.910	49.10	48.50	1.24	2.310	23.10	23.50	-1.70	
A	8/3/2017	Body	D2600V2 SN:1006	9/13/2017	5.350	53.50	54.20	-1.29	2.340	23.40	24.30	-3.70	
A	8/4/2017	Body	D835V2 SN:4d002	11/8/2017	1.030	10.30	9.55	7.85	0.680	6.80	6.33	7.42	5,6
A	8/7/2017	Head	D835V2 SN:4d002	11/8/2017	0.991	9.91	9.46	4.76	0.651	6.51	6.15	5.85	
A	8/9/2017	Body	D835V2 SN:4d002	11/8/2017	1.020	10.20	9.55	6.81	0.676	6.76	6.33	6.79	
A	8/10/2017	Body	D2450V2 SN:706	5/9/2018	4.880	48.80	50.60	-3.56	2.240	22.40	23.80	-5.88	7,8
A	8/10/2017	Body	D1900V2 SN:5d043	11/9/2017	4.010	40.10	39.10	2.56	2.070	20.70	20.70	0.00	9,10
A	8/14/2017	Head	D2600V2 SN:1006	9/13/2017	5.880	58.80	55.50	5.95	2.560	25.60	25.00	2.40	11,12
A	8/14/2017	Body	D2600V2 SN:1006	9/13/2017	5.730	57.30	54.20	5.72	2.500	25.00	24.30	2.88	
A	8/16/2017	Head	D2450V2 SN:748	2/8/2018	5.520	55.20	52.10	5.95	2.500	25.00	24.20	3.31	13,14
B	7/24/2017	Head	D750V3 SN:1019	3/13/2018	0.828	8.28	8.22	0.73	0.546	5.46	5.39	1.30	
B	7/27/2017	Head	D1750V2 SN:1050	4/18/2018	3.660	36.60	36.76	-0.44	1.950	19.50	19.60	-0.51	
B	7/27/2017	Body	D1750V2 SN:1050	4/18/2018	3.850	38.50	37.68	2.18	2.030	20.30	19.92	1.91	15,16
B	7/28/2017	Body	D750V3 SN:1019	3/13/2018	0.829	8.29	8.76	-5.37	0.558	5.58	5.80	-3.79	
B	7/30/2017	Body	D1750V2 SN:1050	4/18/2018	3.800	38.00	37.68	0.85	2.000	20.00	19.92	0.40	
B	7/30/2017	Head	D1750V2 SN:1050	4/18/2018	3.700	37.00	36.76	0.65	1.980	19.80	19.60	1.02	
B	8/1/2017	Body	D750V3 SN:1019	3/13/2018	0.879	8.79	8.76	0.34	0.591	5.91	5.80	1.90	
B	8/5/2017	Body	D1750V2 SN:1077	9/14/2017	3.560	35.60	36.20	-1.66	1.890	18.90	19.30	-2.07	
B	8/5/2017	Head	D1750V2 SN:1077	9/14/2017	3.490	34.90	36.00	-3.06	1.880	18.80	19.10	-1.57	17,18
B	8/7/2017	Head	D750V3 SN:1019	3/13/2018	0.877	8.77	8.22	6.69	0.583	5.83	5.39	8.16	19,20
B	8/9/2017	Body	D2450V2 SN:748	2/8/2018	5.300	53.00	51.30	3.31	2.450	24.50	23.90	2.51	
B	8/10/2017	Head	D2450V2 SN:748	2/8/2018	5.110	51.10	52.10	-1.92	2.370	23.70	24.20	-2.07	
B	8/14/2017	Body	D2450V2 SN:748	2/8/2018	5.310	53.10	51.30	3.51	2.450	24.50	23.90	2.51	21,22
B	8/14/2017	Head	D2450V2 SN:748	2/8/2018	5.160	51.60	52.10	-0.96	2.370	23.70	24.20	-2.07	
C	7/27/2017	Head	D1900V2 SN:5d140	4/19/2018	4.270	42.70	40.80	4.66	2.170	21.70	21.16	2.55	
C	7/27/2017	Body	D1900V2 SN:5d140	4/19/2018	4.330	43.30	41.20	5.10	2.210	22.10	21.52	2.70	23,24
C	7/31/2017	Body	D1900V2 SN:5d140	4/19/2018	3.940	39.40	41.20	-4.37	2.000	20.00	21.52	-7.06	
C	7/31/2017	Head	D1900V2 SN:5d140	4/19/2018	3.940	39.40	40.80	-3.43	2.000	20.00	21.16	-5.48	
C	8/4/2017	Head	D1900V2 SN:5d140	4/19/2018	4.170	41.70	40.80	2.21	2.120	21.20	21.16	0.19	
C	8/4/2017	Body	D1900V2 SN:5d140	4/19/2018	4.230	42.30	41.20	2.67	2.150	21.50	21.52	-0.09	
C	8/8/2017	Head	D1900V2 SN:5d043	11/9/2017	4.200	42.00	40.00	5.00	2.140	21.40	20.90	2.39	
C	8/8/2017	Body	D1900V2 SN:5d043	11/9/2017	4.160	41.60	39.10	6.39	2.130	21.30	20.70	2.90	
C	8/14/2017	Head	D1900V2 SN:5d043	11/9/2017	4.110	41.10	40.00	2.75	2.090	20.90	20.90	0.00	
C	8/14/2017	Body	D1900V2 SN:5d043	11/9/2017	4.260	42.60	39.10	8.95	2.180	21.80	20.70	5.31	25,26

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
D	7/24/2017	Head	D835V2 SN:4d002	11/8/2017	0.971	9.71	9.46	2.64	0.640	6.40	6.15	4.07	
D	7/27/2017	Head	D2600V2 SN:1006	9/13/2017	5.940	59.40	55.50	7.03	2.600	26.00	25.00	4.00	27,28
D	7/27/2017	Body	D2600V2 SN:1006	9/13/2017	5.590	55.90	54.20	3.14	2.440	24.40	24.30	0.41	
D	7/27/2017	Head	D835V2 SN:4d002	11/8/2017	1.000	10.00	9.46	5.71	0.662	6.62	6.15	7.64	29,30
D	7/30/2017	Body	D2600V2 SN:1006	9/13/2017	5.500	55.00	54.20	1.48	2.400	24.00	24.30	-1.23	
D	7/31/2017	Body	D835V2 SN:4d002	11/8/2017	0.961	9.61	9.55	0.63	0.596	5.96	6.33	-5.85	
D	8/1/2017	Head	D2600V2 SN:1006	9/13/2017	5.760	57.60	55.50	3.78	2.530	25.30	25.00	1.20	
D	8/3/2017	Body	D2600V2 SN:1006	9/13/2017	5.290	52.90	54.20	-2.40	2.320	23.20	24.30	-4.53	
D	8/5/2017	Head	D2600V2 SN:1006	9/13/2017	5.590	55.90	55.50	0.72	2.440	24.40	25.00	-2.40	
D	8/5/2017	Head	D835V2 SN:4d002	11/8/2017	0.918	9.18	9.46	-2.96	0.606	6.06	6.15	-1.46	
D	8/7/2017	Body	D2600V2 SN:1006	9/13/2017	5.480	54.80	54.20	1.11	2.420	24.20	24.30	-0.41	
D	8/9/2017	Head	D2600V2 SN:1006	9/13/2017	5.920	59.20	55.50	6.67	2.600	26.00	25.00	4.00	
D	8/9/2017	Head	D835V2 SN:4d002	11/8/2017	0.962	9.62	9.46	1.69	0.633	6.33	6.15	2.93	
D	8/9/2017	Body	D835V2 SN:4d002	11/8/2017	0.945	9.45	9.55	-1.05	0.624	6.24	6.33	-1.42	
D	8/14/2017	Head	D1900V2 SN:5d043	11/9/2017	4.080	40.80	40.00	2.00	2.100	21.00	20.90	0.48	31,32
D	8/15/2017	Head	D2600V2 SN:1006	9/13/2017	5.520	55.20	55.50	-0.54	2.420	24.20	25.00	-3.20	
D	8/16/2017	Head	D2450V2 SN:706	5/9/2018	5.650	56.50	52.10	8.45	2.570	25.70	24.40	5.33	33,34
E	7/28/2017	Head	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	7.860	78.60	83.30	-5.64	2.210	22.10	23.80	-7.14	
E	7/28/2017	Body	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	8.480	84.80	78.30	8.30	2.340	23.40	22.00	6.36	
E	7/30/2017	Head	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	8.230	82.30	83.30	-1.20	2.310	23.10	23.80	-2.94	
E	7/30/2017	Body	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	7.860	78.60	78.30	0.38	2.190	21.90	22.00	-0.45	
E	8/3/2017	Body	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	8.470	84.70	78.30	8.17	2.350	23.50	22.00	6.82	
E	8/3/2017	Head	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	7.780	77.80	83.30	-6.60	2.190	21.90	23.80	-7.98	
E	8/7/2017	Body	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	8.410	84.10	78.30	7.41	2.320	23.20	22.00	5.45	
E	8/7/2017	Head	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	7.630	76.30	83.30	-8.40	2.150	21.50	23.80	-9.66	
E	8/11/2017	Head	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	7.970	79.70	83.30	-4.32	2.240	22.40	23.80	-5.88	
E	8/11/2017	Body	D5GHZV2 SN:1003 (5.6 GHz)	2/13/2018	8.560	85.60	78.30	9.32	2.370	23.70	22.00	7.73	35,36
E	8/15/2017	Body	D5GHZV2 SN:1168 (5.6 GHz)	11/14/2017	8.010	80.10	78.60	1.91	2.230	22.30	22.00	1.36	
E	8/15/2017	Head	D5GHZV2 SN:1168 (5.6 GHz)	11/14/2017	7.790	77.90	83.30	-6.48	2.200	22.00	23.80	-7.56	37,38
F	7/28/2017	Head	D2450V2 SN:748	2/8/2018	5.660	56.60	52.10	8.64	2.540	25.40	24.20	4.96	39,40
F	7/28/2017	Body	D2450V2 SN:748	2/8/2018	5.390	53.90	51.30	5.07	2.480	24.80	23.90	3.77	
F	7/30/2017	Head	D2450V2 SN:748	2/8/2018	5.630	56.30	52.10	8.06	2.530	25.30	24.20	4.55	
F	7/30/2017	Body	D2450V2 SN:748	2/8/2018	5.270	52.70	51.30	2.73	2.430	24.30	23.90	1.67	
F	8/3/2017	Head	D2450V2 SN:748	2/8/2018	5.560	55.60	52.10	6.72	2.490	24.90	24.20	2.89	
F	8/3/2017	Body	D2450V2 SN:748	2/8/2018	5.110	51.10	51.30	-0.39	2.360	23.60	23.90	-1.26	
F	8/7/2017	Body	D2450V2 SN:748	2/8/2018	5.280	52.80	51.30	2.92	2.420	24.20	23.90	1.26	
F	8/7/2017	Head	D2450V2 SN:748	2/8/2018	5.580	55.80	52.10	7.10	2.510	25.10	24.20	3.72	
F	8/11/2017	Head	D2450V2 SN:748	2/8/2018	5.610	56.10	52.10	7.68	2.530	25.30	24.20	4.55	
F	8/11/2017	Body	D2450V2 SN:748	2/8/2018	4.920	49.20	51.30	-4.09	2.270	22.70	23.90	-5.02	
F	8/14/2017	Body	D2450V2 SN:748	2/8/2018	5.010	50.10	51.30	-2.34	2.280	22.80	23.90	-4.60	
F	8/14/2017	Head	D2450V2 SN:748	2/8/2018	5.630	56.30	52.10	8.06	2.520	25.20	24.20	4.13	

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
G	7/28/2017	Body	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.130	71.30	73.50	-2.99	1.960	19.60	20.50	-4.39	
G	7/28/2017	Head	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.300	73.00	78.10	-6.53	2.060	20.60	22.10	-6.79	
G	7/30/2017	Head	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.670	76.70	78.10	-1.79	2.160	21.60	22.10	-2.26	
G	7/30/2017	Body	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.470	74.70	73.50	1.63	2.060	20.60	20.50	0.49	
G	8/3/2017	Body	D5GHZV2 SN:1168 (5.8 GHz)	11/14/2017	7.730	77.30	73.90	4.60	2.140	21.40	20.50	4.39	41,42
G	8/3/2017	Head	D5GHZV2 SN:1168 (5.8 GHz)	11/14/2017	7.800	78.00	78.10	-0.13	2.220	22.20	22.20	0.00	
G	8/7/2017	Head	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.180	71.80	78.10	-8.07	2.050	20.50	22.10	-7.24	
G	8/7/2017	Body	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.980	79.80	73.50	8.57	2.200	22.00	20.50	7.32	
G	8/11/2017	Body	D5GHZV2 SN:1168 (5.8 GHz)	11/14/2017	7.110	71.10	73.90	-3.79	1.980	19.80	20.50	-3.41	
G	8/11/2017	Head	D5GHZV2 SN:1168 (5.8 GHz)	11/14/2017	7.480	74.80	78.10	-4.23	2.140	21.40	22.20	-3.60	
G	8/15/2017	Head	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	7.070	70.70	78.10	-9.48	1.990	19.90	22.10	-9.95	
G	8/15/2017	Body	D5GHZV2 SN:1003 (5.8 GHz)	2/13/2018	8.060	80.60	73.50	9.66	2.220	22.20	20.50	8.29	43,44
G	8/15/2017	Body	D2450V2 SN:748	2/8/2018	5.240	52.40	51.30	2.14	2.430	24.30	23.90	1.67	
G	8/16/2017	Head	D2450V2 SN:748	2/8/2018	5.510	55.10	52.10	5.76	2.490	24.90	24.20	2.89	45,46
H	7/28/2017	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	8.000	80.00	76.80	4.17	2.320	23.20	22.00	5.45	
H	7/29/2017	Body	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	7.470	74.70	73.60	1.49	2.120	21.20	20.50	3.41	
H	7/30/2017	Body	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	7.290	72.90	73.60	-0.95	2.060	20.60	20.50	0.49	
H	7/30/2017	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	8.220	82.20	76.80	7.03	2.380	23.80	22.00	8.18	47,48
H	8/3/2017	Body	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	6.870	68.70	73.60	-6.66	1.960	19.60	20.50	-4.39	
H	8/3/2017	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	7.660	76.60	76.80	-0.26	2.230	22.30	22.00	1.36	
H	8/7/2017	Head	D5GHZV2 SN:1003 (5.2 GHz)	2/13/2018	8.060	80.60	76.50	5.36	2.340	23.40	21.80	7.34	
H	8/7/2017	Body	D5GHZV2 SN:1003 (5.2 GHz)	2/13/2018	7.670	76.70	70.50	8.79	2.120	21.20	19.80	7.07	49,50
H	8/10/2017	Head	D5GHZV2 SN:1168 (5.6 GHz)	11/14/2017	7.860	78.60	83.30	-5.64	2.310	23.10	23.80	-2.94	
H	8/11/2017	Body	D5GHZV2 SN:1138 (5.6 GHz)	9/22/2017	8.340	83.40	78.80	5.84	2.340	23.40	22.00	6.36	51,52
H	8/14/2017	Body	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	7.180	71.80	73.60	-2.45	2.040	20.40	20.50	-0.49	
H	8/14/2017	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/14/2017	7.650	76.50	76.80	-0.39	2.220	22.20	22.00	0.91	

9. Conducted Output Power Measurements

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Refer to Sec. 6.3.5 for more information. The selection between antennas UAT and LAT in application is based on RSSI based antenna selection. The full details of power selections are described in the operational description. Refer to Sec. 10 for details of the testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted in detail for each technology in their respective Sections.

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
850	Max Power (dBm)		27.8	27.8	27.8	27.8	30.3	30.3	30.3	30.3
	128	824.2	27.3	27.8	27.3	27.8	29.7	30.3	29.7	30.3
	190	836.6	27.1	27.8	27.1	27.8	29.6	30.3	29.6	30.3
	251	848.8	27.2	27.8	27.2	27.8	29.6	30.3	29.6	30.3
Frame Power (dBm)										
850	Max Power (dBm)		18.8	21.8	18.8	21.8	21.3	24.3	21.3	24.3
	128	824.2	18.3	21.8	18.3	21.8	20.7	24.3	20.7	24.3
	190	836.6	18.1	21.8	18.1	21.8	20.6	24.3	20.6	24.3
	251	848.8	18.2	21.8	18.2	21.8	20.6	24.3	20.6	24.3

EGPRS (8PSK) - Coding Scheme: MCS5

MODE A										
Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
850	Max Power (dBm)		22.5	22.5	22.5	22.5	24.0	24.0	24.0	24.0
	128	824.2	21.4	21.5	21.4	21.5	23.7	24.0	23.8	24.0
	190	836.6	21.4	21.4	21.4	21.4	23.8	23.9	23.9	23.9
	251	848.8	21.4	21.4	21.4	21.4	23.8	24.0	23.9	24.0
Frame Power (dBm)										
850	Max Power (dBm)		13.5	16.5	13.5	16.5	15.0	18.0	15.0	18.0
	128	824.2	12.4	15.5	12.4	15.5	14.7	18.0	14.8	18.0
	190	836.6	12.4	15.4	12.4	15.4	14.8	17.9	14.9	17.9
	251	848.8	12.4	15.4	12.4	15.4	14.8	18.0	14.9	18.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots based on the maximum output power from Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results**GPRS (GMSK) - Coding Scheme: CS1**

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
1900	Max Power (dBm)		26.5	26.0	26.5	26.5	29.8	29.8	29.8	27.3
	512	1850.2	25.0	25.0	25.0	25.0	28.9	28.5	28.9	27.3
	661	1880.0	25.3	25.0	25.3	25.0	28.8	28.5	28.8	27.3
	810	1909.8	25.0	25.0	25.0	25.0	28.3	28.5	28.3	27.3
Frame Power (dBm)										
1900	Max Power (dBm)		17.5	20.0	17.5	20.5	20.8	23.8	20.8	21.3
	512	1850.2	16.0	19.0	16.0	19.0	19.9	22.5	19.9	21.3
	661	1880.0	16.3	19.0	16.3	19.0	19.8	22.5	19.8	21.3
	810	1909.8	16.0	19.0	16.0	19.0	19.3	22.5	19.3	21.3

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
1900	Max Power (dBm)		22.5	22.5	22.5	22.5	25.0	25.0	25.0	25.0
	512	1850.2	22.3	22.5	22.4	22.5	25.0	24.9	25.0	25.0
	661	1880.0	22.4	22.5	22.4	22.5	24.9	25.0	24.9	24.9
	810	1909.8	22.4	22.5	22.5	22.5	24.9	24.9	25.0	24.9
Frame Power (dBm)										
1900	Max Power (dBm)		13.5	16.5	13.5	16.5	16.0	19.0	16.0	19.0
	512	1850.2	13.3	16.5	13.4	16.5	16.0	18.9	16.0	19.0
	661	1880.0	13.4	16.5	13.4	16.5	15.9	19.0	15.9	18.9
	810	1909.8	13.4	16.5	13.5	16.5	15.9	18.9	16.0	18.9

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots based on the maximum output power from Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

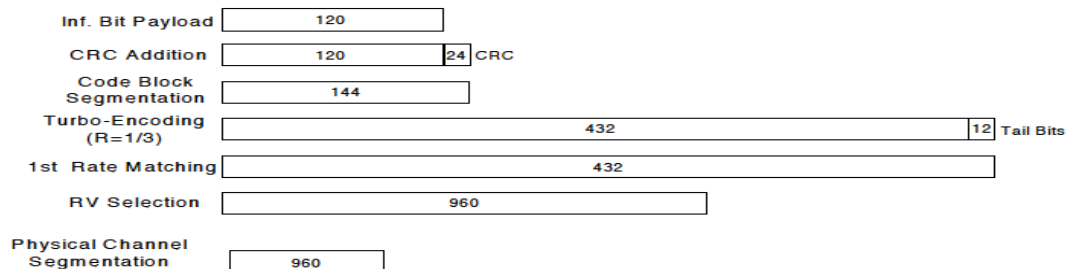**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

HSPA+

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)				
						MODE A		MODE B		
						UAT 1	LAT 1	UAT 1	LAT 1	
W-CDMA Band V	Rel 99	Max Power (dBm)				24.3	24.3	24.8	24.8	
		RMC, 12.2 kbps	4132	826.4	N/A	24.3	24.3	24.8	24.8	
			4183	836.6	N/A	24.3	24.3	24.8	24.8	
			4233	846.6	N/A	24.3	24.3	24.8	24.8	
	HSDPA	Max Power (dBm)				24.3	24.3	24.8	24.8	
		Subtest 1	4132	826.4	0	24.3	24.3	24.3	24.3	
			4183	836.6	0	24.2	24.2	24.2	24.2	
			4233	846.6	0	24.3	24.3	24.1	24.1	
		Subtest 2	4132	826.4	0	24.3	24.3	24.1	24.1	
			4183	836.6	0	24.3	24.3	24.1	24.1	
			4233	846.6	0	24.2	24.2	24.2	24.2	
		Subtest 3	4132	826.4	0.5	23.8	23.8	23.7	23.7	
			4183	836.6	0.5	23.8	23.8	23.8	23.8	
			4233	846.6	0.5	23.7	23.7	23.7	23.7	
		Subtest 4	4132	826.4	0.5	23.8	23.8	23.7	23.7	
			4183	836.6	0.5	23.7	23.7	23.8	23.8	
			4233	846.6	0.5	23.8	23.8	23.7	23.7	
		HSUPA	Max Power (dBm)				24.3	24.3	24.8	24.8
			Subtest 1	4132	826.4	0	24.2	24.2	24.2	24.2
				4183	836.6	0	24.3	24.3	24.1	24.1
	4233			846.6	0	24.3	24.3	24.1	24.1	
	Subtest 2		4132	826.4	2	22.3	22.3	22.4	22.4	
			4183	836.6	2	22.2	22.2	22.4	22.4	
			4233	846.6	2	22.3	22.3	22.3	22.3	
	Subtest 3		4132	826.4	1	23.3	23.3	23.2	23.2	
			4183	836.6	1	23.3	23.3	23.2	23.2	
			4233	846.6	1	23.2	23.2	23.1	23.1	
	Subtest 4		4132	826.4	2	22.3	22.3	22.2	22.2	
			4183	836.6	2	22.3	22.3	22.2	22.2	
			4233	846.6	2	22.2	22.2	22.2	22.2	
	Subtest 5		4132	826.4	0	24.3	24.3	24.1	24.1	
			4183	836.6	0	24.3	24.3	24.1	24.1	
			4233	846.6	0	24.3	24.3	24.2	24.2	
	DC-HSDPA	Max Power (dBm)				24.3	24.3	24.8	24.8	
		Subtest 1	4132	826.4	0	24.2	24.2	24.2	24.2	
			4183	836.6	0	24.3	24.3	24.1	24.1	
			4233	846.6	0	24.3	24.3	24.1	24.1	
		Subtest 2	4132	826.4	0	24.3	24.3	24.1	24.1	
			4183	836.6	0	24.3	24.3	24.1	24.1	
			4233	846.6	0	24.3	24.3	24.2	24.2	
		Subtest 3	4132	826.4	0.5	23.8	23.8	23.7	23.7	
			4183	836.6	0.5	23.8	23.8	23.8	23.8	
			4233	846.6	0.5	23.7	23.7	23.7	23.7	
		Subtest 4	4132	826.4	0.5	23.8	23.8	23.7	23.7	
			4183	836.6	0.5	23.8	23.8	23.8	23.8	
			4233	846.6	0.5	23.7	23.7	23.7	23.7	
	HSPA+	Max Power (dBm)				24.3	24.3	24.8	24.8	
		Subtest 1	4132	826.4	2.5	21.8	21.8	22.3	22.3	
			4183	836.6	2.5	21.7	21.7	22.2	22.2	
			4233	846.6	2.5	21.8	21.8	22.3	22.3	

W-CDMA Band IV Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)				
						MODE A		MODE B		
						UAT 1	LAT 1	UAT 1	LAT 1	
W-CDMA Band IV	Rel 99	Max Power (dBm)				21.8	22.3	25.3	24.5	
		RMC, 12.2 kbps	1312	1712.4	N/A	21.8	22.3	25.3	24.4	
			1413	1732.6	N/A	21.8	22.3	25.3	24.4	
			1513	1752.6	N/A	21.8	22.3	25.3	24.4	
	HSDPA	Max Power (dBm)				21.8	22.3	25.3	24.5	
		Subtest 1	1312	1712.4	0	21.8	22.3	25.3	24.3	
			1413	1732.6	0	21.8	22.2	25.2	24.3	
			1513	1752.6	0	21.7	22.3	25.3	24.4	
		Subtest 2	1312	1712.4	0	21.8	22.3	25.3	24.4	
			1413	1732.6	0	21.7	22.3	25.2	24.4	
			1513	1752.6	0	21.8	22.2	25.3	24.4	
		Subtest 3	1312	1712.4	0.5	21.2	21.8	24.8	24.0	
			1413	1732.6	0.5	21.3	21.8	24.7	24.0	
			1513	1752.6	0.5	21.3	21.7	24.8	23.9	
		Subtest 4	1312	1712.4	0.5	21.3	21.7	24.8	24.0	
			1413	1732.6	0.5	21.2	21.8	24.8	23.9	
			1513	1752.6	0.5	21.3	21.8	24.7	24.0	
		HSUPA	Max Power (dBm)				21.8	22.3	25.3	24.5
			Subtest 1	1312	1712.4	0	21.7	22.3	25.2	24.3
				1413	1732.6	0	21.8	22.3	25.3	24.4
	1513			1752.6	0	21.7	22.3	25.3	24.3	
	Subtest 2		1312	1712.4	2	19.7	20.3	23.3	22.5	
			1413	1732.6	2	19.8	20.3	23.2	22.4	
			1513	1752.6	2	19.8	20.3	23.3	22.4	
	Subtest 3		1312	1712.4	1	20.8	21.3	24.3	23.5	
			1413	1732.6	1	20.7	21.2	24.3	23.4	
			1513	1752.6	1	20.7	21.3	24.3	23.5	
	Subtest 4		1312	1712.4	2	19.7	20.2	23.2	22.5	
			1413	1732.6	2	19.8	20.3	23.3	22.4	
			1513	1752.6	2	19.8	20.3	23.2	22.5	
	Subtest 5		1312	1712.4	0	21.8	22.2	25.3	24.5	
			1413	1732.6	0	21.7	22.3	25.3	24.5	
			1513	1752.6	0	21.8	22.3	25.3	24.5	
	DC-HSDPA	Max Power (dBm)				21.8	22.3	25.3	24.5	
		Subtest 1	1312	1712.4	0	21.8	22.2	25.2	24.4	
			1413	1732.6	0	21.8	22.3	25.2	24.5	
			1513	1752.6	0	21.7	22.3	25.3	24.5	
		Subtest 2	1312	1712.4	0	21.8	22.3	25.3	24.4	
			1413	1732.6	0	21.7	22.3	25.3	24.4	
			1513	1752.6	0	21.8	22.2	25.3	24.5	
		Subtest 3	1312	1712.4	0.5	21.3	21.8	24.8	24.0	
			1413	1732.6	0.5	21.2	21.7	24.7	23.9	
			1513	1752.6	0.5	21.2	21.8	24.8	23.9	
		Subtest 4	1312	1712.4	0.5	21.3	21.8	24.8	24.0	
			1413	1732.6	0.5	21.2	21.7	24.7	24.0	
			1513	1752.6	0.5	21.3	21.8	24.8	24.0	
		HSPA+	Max Power (dBm)				21.8	22.3	25.3	24.5
			Subtest 1	1312	1712.4	2.5	19.3	19.7	22.8	21.9
				1413	1732.6	2.5	19.3	19.7	22.7	22.0
	1513			1752.6	2.5	19.3	19.8	22.7	22.0	

W-CDMA Band II Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)					
					MODE A		MODE B			
					UAT 1	LAT 1	UAT 1	LAT 1		
W-CDMA Band II	Rel 99	Max Power (dBm)			19.5	21.3	25.3	23.3		
		RMC, 12.2 kbps	9262	1852.4	N/A	19.5	21.3	25.3	23.3	
			9400	1880.0	N/A	19.5	21.3	25.3	23.3	
			9538	1907.6	N/A	19.5	21.3	25.3	23.3	
	HSDPA	Max Power (dBm)			19.5	21.3	25.3	23.3		
		Subtest 1	9262	1852.4	0	19.5	21.3	25.3	23.3	
			9400	1880.0	0	19.5	21.2	25.3	23.3	
			9538	1907.6	0	19.4	21.3	25.3	23.2	
		Subtest 2	9262	1852.4	0	19.5	21.3	25.3	23.3	
			9400	1880.0	0	19.5	21.2	25.3	23.3	
			9538	1907.6	0	19.3	21.2	25.3	23.2	
		Subtest 3	9262	1852.4	0.5	19.0	19.7	24.8	22.7	
			9400	1880.0	0.5	19.0	19.8	24.7	22.8	
			9538	1907.6	0.5	18.9	19.8	24.8	22.7	
		Subtest 4	9262	1852.4	0.5	18.9	19.8	24.7	22.8	
			9400	1880.0	0.5	19.0	19.7	24.7	22.8	
			9538	1907.6	0.5	18.9	19.8	24.8	22.8	
		HSUPA	Max Power (dBm)			19.5	21.3	25.3	23.3	
			Subtest 1	9262	1852.4	0	19.5	21.2	25.3	23.3
				9400	1880.0	0	19.5	21.3	25.3	23.2
	9538			1907.6	0	19.4	21.2	25.2	23.3	
	Subtest 2		9262	1852.4	2	17.4	19.3	23.3	21.3	
			9400	1880.0	2	17.4	19.3	23.2	21.3	
			9538	1907.6	2	17.5	19.3	23.3	21.2	
	Subtest 3		9262	1852.4	1	18.5	20.3	24.3	22.3	
			9400	1880.0	1	18.4	20.2	24.3	22.3	
			9538	1907.6	1	18.5	20.2	24.2	22.2	
	Subtest 4		9262	1852.4	2	17.5	19.3	23.2	21.2	
			9400	1880.0	2	17.4	19.2	23.2	21.3	
			9538	1907.6	2	17.5	19.3	23.3	21.2	
	Subtest 5		9262	1852.4	0	19.4	21.3	25.3	23.2	
			9400	1880.0	0	19.5	21.3	25.3	23.3	
			9538	1907.6	0	19.4	21.3	25.2	23.2	
	DC-HSDPA	Max Power (dBm)			19.5	21.3	25.3	23.3		
		Subtest 1	9262	1852.4	0	19.5	21.2	25.3	23.3	
			9400	1880.0	0	19.5	21.3	25.2	23.3	
			9538	1907.6	0	19.4	21.3	25.3	23.2	
		Subtest 2	9262	1852.4	0	19.4	21.3	25.3	23.3	
			9400	1880.0	0	19.5	21.3	25.3	23.2	
			9538	1907.6	0	19.4	21.3	25.3	23.3	
		Subtest 3	9262	1852.4	0.5	19.0	19.7	24.8	22.8	
			9400	1880.0	0.5	19.0	19.7	24.8	22.8	
			9538	1907.6	0.5	18.9	19.8	24.7	22.7	
		Subtest 4	9262	1852.4	0.5	18.9	19.8	24.7	22.7	
			9400	1880.0	0.5	19.0	19.8	24.8	22.7	
			9538	1907.6	0.5	18.9	19.8	24.8	22.8	
	HSPA+	Max Power (dBm)			19.5	21.3	25.3	23.3		
		Subtest 1	9262	1852.4	2.5	17.0	18.8	22.8	20.7	
			9400	1880.0	2.5	17.0	18.8	22.8	20.7	
			9538	1907.6	2.5	17.0	18.7	22.8	20.8	

9.3. CDMA

1x Advanced Setup Procedures used to establish the test signals

Call box setup procedure

- Protocol Rev > 6 (IS-2000-0)
- System ID: 331; NID: 65535, Reg. Ch. #.:
- Radio Config (RC) > Fwd11,Rvs8
- Service Option (SO) Setup > SO75 (Loopback)
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)
- Reverse Power Control Mode: 00-200 to 400 bps
- Smart blanking was disabled.

CDMA BC0 Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 0	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xRTT	RC1 SO55 (Loopback)	1013	824.70	23.3	23.3	24.8	24.8
			384	836.52	23.3	23.3	24.8	24.8
			777	848.31	23.3	23.3	24.8	24.8
		RC3 SO55 (Loopback)	1013	824.70	23.3	23.3	24.8	24.8
			384	836.52	23.3	23.3	24.8	24.8
			777	848.31	23.3	23.3	24.8	24.8
		RC3 SO32 (+F-SCH)	1013	824.70	23.3	23.3	24.8	24.8
			384	836.52	23.3	23.3	24.8	24.8
			777	848.31	23.3	23.3	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	1013	824.70	23.2	23.2	24.8	24.8
			384	836.52	23.3	23.3	24.8	24.8
			777	848.31	23.3	23.3	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	1013	824.70	23.2	23.2	24.8	24.8
			384	836.52	23.3	23.3	24.8	24.8
			777	848.31	23.3	23.3	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	1013	824.70	23.3	23.3	24.8	24.8
			384	836.52	23.2	23.2	24.8	24.8
			777	848.31	23.3	23.3	24.7	24.7

CDMA BC1 Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 1	Max Power (dBm)				19.5	21.3	25.3	23.3
	1xRTT	RC1 SO55 (Loopback)	25	1851.25	19.3	21.1	25.2	23.2
			600	1880.00	19.4	21.2	25.2	23.2
			1175	1908.75	19.5	21.2	25.2	23.2
		RC3 SO55 (Loopback)	25	1851.25	19.3	21.1	25.2	23.2
			600	1880.00	19.4	21.2	25.2	23.2
			1175	1908.75	19.5	21.2	25.2	23.2
		RC3 SO32 (+F-SCH)	25	1851.25	19.3	21.1	25.2	23.2
			600	1880.00	19.4	21.2	25.2	23.3
			1175	1908.75	19.5	21.2	25.2	23.3
	Max Power (dBm)				19.5	21.3	25.3	23.3
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	25	1851.25	19.3	21.1	25.3	23.3
			600	1880.00	19.4	21.2	25.3	23.3
			1175	1908.75	19.5	21.2	25.3	23.3
	Max Power (dBm)				19.5	21.3	25.3	23.3
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	25	1851.25	19.3	21.1	25.2	23.3
			600	1880.00	19.4	21.2	25.2	23.3
			1175	1908.75	19.5	21.2	25.2	23.3
	Max Power (dBm)				19.5	21.3	25.3	23.3
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	25	1851.25	19.4	21.2	25.2	23.2
			600	1880.00	19.4	21.2	25.3	23.3
			1175	1908.75	19.5	21.2	25.3	23.3

CDMA BC10 Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 10	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xRTT	RC1 SO55 (Loopback)	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8
		RC3 SO55 (Loopback)	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8
		RC3 SO32 (+F-SCH)	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8
	Max Power (dBm)				23.3	23.3	24.8	24.8
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	476	817.90	23.2	23.2	24.8	24.8
			580	820.50	23.2	23.2	24.8	24.8
			684	823.10	23.2	23.2	24.8	24.8

9.4. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.3.3.15				
NS_21	6.6.2.2.1, 6.6.3.3.16	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

operations below this frequency is not covered in this version of specifications except for the channel assignments in NOTE2 as the emissions requirement in 6.6.3.3.1 may not be met. For 10MHz channel bandwidth whose carrier frequency is larger than or equal to 1945 MHz or 15 MHz channel bandwidth whose carrier frequency is larger than or equal to 1947.5 MHz, no A-MPR applies.

NOTE 2: Applicable when carrier frequency is 1932.5 MHz for 15MHz channel bandwidth or 1930 MHz for 20MHz channel bandwidth case.

NOTE 3: Applicable when the E-UTRA carrier is within 1920-1980 MHz.

NOTE 4: Applicable when the upper edge of the channel bandwidth frequency is greater than 1980MHz.

NOTE 5: Applicable only for an LAA SCell configured in Band 46.

LTE Band 2 Average Power (dBm) Measured Results

SAR for LTE Band 2 (Frequency range: 1850 - 1910 MHz) is covered by LTE Band 25 (Frequency range: 1850 - 1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4 Average Power (dBm) Measured Results

SAR for LTE Band 4 (Frequency range: 1710 - 1755 MHz) is covered by LTE Band 66 (Frequency range: 1710 - 1780 MHz) due to overlapping frequency range, same maximum tune-up limit and channel bandwidths from 20MHz to 5MHz. Therefore, LTE Band 4 at 3MHz and 1.4MHz bandwidths have been measured.

BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
				Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
					I7115 MHz	I7325 MHz	I7535 MHz		I7115 MHz	I7325 MHz	I7535 MHz		I7115 MHz	I7325 MHz	I7535 MHz		I7115 MHz	I7325 MHz	I7535 MHz
Max Power (dBm)				21.8			22.2			25.3			24.5						
3	QPSK	1	0	0.0	218	217	217	0.0	22.1	22.2	22.0	0.0	25.1	25.1	25.1	0.0	24.4	24.1	24.1
		1	8	0.0	216	216	218	0.0	22.1	22.1	22.0	0.0	25.2	25.0	25.0	0.0	24.1	24.2	24.3
		1	14	0.0	217	218	217	0.0	22.2	22.0	22.1	0.0	25.3	25.2	25.1	0.0	24.2	24.3	24.3
		8	0	0.6	211	211	210	10	210	211	211	10	24.1	24.3	24.3	0.2	24.3	24.1	24.0
		8	4	0.6	20.9	211	212	10	211	212	212	10	24.3	24.2	24.1	0.2	24.2	24.0	24.1
		8	7	0.6	210	210	211	10	210	211	211	10	24.2	24.1	24.0	0.2	24.0	24.1	24.3
	16QAM	15	0	0.6	210	210	212	10	212	212	212	10	24.2	24.1	24.2	0.2	24.2	24.1	24.2
		1	0	0.6	211	212	211	10	211	211	211	10	24.3	24.3	24.3	0.2	24.1	24.1	24.2
		1	8	0.6	20.9	210	211	10	211	211	210	10	24.0	24.2	24.0	0.2	24.1	24.2	24.0
		1	14	0.6	210	211	211	10	211	212	211	10	24.1	24.1	24.0	0.2	24.1	24.2	24.0
		8	0	1.6	20.1	20.2	20.2	2.0	20.2	20.1	20.2	2.0	23.2	23.1	23.2	1.2	23.1	23.3	23.1
		8	4	1.6	20.1	20.0	20.0	2.0	20.2	20.1	20.1	2.0	23.1	23.1	23.1	1.2	23.0	23.2	23.3
	64QAM	8	7	1.6	20.1	20.1	20.1	2.0	20.1	20.1	20.2	2.0	23.1	23.1	23.2	1.2	23.1	23.1	23.3
		15	0	1.6	20.1	20.2	20.0	2.0	20.0	20.1	20.1	2.0	23.0	23.2	23.0	1.2	23.3	23.0	23.3
		1	0	1.6	20.1	20.1	20.0	2.0	20.1	20.1	20.2	2.0	23.2	23.2	23.2	1.2	23.1	23.1	23.3
		1	8	1.6	20.2	20.0	20.1	2.0	20.1	20.0	20.1	2.0	23.1	23.0	23.1	1.2	23.3	23.1	23.2
		1	14	1.6	20.1	20.1	20.1	2.0	20.1	20.1	20.2	2.0	23.3	23.1	23.3	1.2	23.0	23.2	23.1
		8	0	2.6	19.9	19.2	19.1	3.0	19.0	19.0	19.0	3.0	22.1	22.1	22.0	2.2	22.0	22.2	22.3
14	QPSK	8	4	2.6	19.0	19.2	19.2	3.0	19.0	19.2	19.0	3.0	22.0	22.1	22.0	2.2	22.2	22.3	22.0
		8	7	2.6	19.1	19.0	19.0	3.0	19.1	19.0	19.2	3.0	22.0	22.1	22.0	2.2	22.1	22.0	22.1
		15	0	2.6	19.2	19.0	19.2	3.0	19.1	19.1	19.2	3.0	22.0	22.1	22.3	2.2	22.1	22.1	22.2
		1	0	0.0	216	217	217	0.0	22.1	22.1	22.0	0.0	25.1	25.2	25.1	0.0	24.2	24.5	24.1
		1	2	0.0	216	216	218	0.0	22.1	22.0	22.2	0.0	25.1	25.1	25.2	0.0	24.4	24.3	24.3
		1	5	0.0	218	216	216	0.0	22.2	22.1	22.0	0.0	25.2	25.3	25.2	0.0	24.3	24.1	24.3
	16QAM	3	0	0.0	215	217	216	0.0	22.1	22.1	22.1	0.0	25.3	25.1	25.2	0.0	24.5	24.3	24.1
		3	1	0.0	216	217	217	0.0	22.1	22.1	22.1	0.0	25.1	25.2	25.2	0.0	24.4	24.3	24.4
		3	2	0.0	216	216	216	0.0	22.0	22.0	22.0	0.0	25.3	25.1	25.2	0.0	24.2	24.2	24.3
		6	0	0.6	211	20.9	210	10	211	211	210	10	24.1	24.3	24.3	0.2	24.1	24.0	24.1
		1	0	0.6	211	210	211	10	210	210	212	10	24.0	24.3	24.2	0.2	24.3	24.3	24.3
		1	2	0.6	211	210	211	10	211	211	212	10	24.1	24.3	24.0	0.2	24.1	24.1	24.0
	64QAM	1	5	0.6	212	212	212	10	211	212	212	10	24.2	24.1	24.1	0.2	24.2	24.2	24.2
		3	0	0.6	212	210	20.9	10	211	210	211	10	24.2	24.2	24.2	0.2	24.1	24.1	24.1
		3	1	0.6	210	210	211	10	210	210	211	10	24.2	24.1	24.2	0.2	24.3	24.2	24.3
3		2	0.6	210	211	210	10	211	211	210	10	24.2	24.0	24.2	0.2	24.0	24.1	24.0	
6		0	1.6	20.1	20.1	20.2	2.0	20.1	20.1	20.0	2.0	23.2	23.1	23.1	1.2	23.0	23.1	23.1	
1		0	1.6	20.0	20.0	20.1	2.0	20.0	20.1	20.0	2.0	23.2	23.0	23.3	1.2	23.2	23.1	23.1	
64QAM	1	2	1.6	20.1	20.1	20.0	2.0	20.2	20.1	20.1	2.0	23.3	23.3	23.1	1.2	23.2	23.1	23.1	
	1	5	1.6	20.1	20.2	20.1	2.0	20.1	20.0	20.0	2.0	23.3	23.1	23.1	1.2	23.1	23.2	23.1	
	3	0	1.6	20.2	20.0	20.0	2.0	20.0	20.2	20.1	2.0	23.0	23.2	23.1	1.2	23.3	23.1	23.0	
	3	1	1.6	20.1	20.0	20.2	2.0	20.1	20.1	20.2	2.0	23.3	23.1	23.1	1.2	23.2	23.3	23.0	
	3	2	1.6	20.1	20.1	20.1	2.0	20.0	20.2	20.1	2.0	23.1	23.2	23.2	1.2	23.1	23.1	23.2	
	6	0	2.6	19.0	19.2	18.9	3.0	19.2	19.1	19.2	3.0	22.1	22.0	22.2	2.2	22.1	22.1	22.1	

LTE Band 5 Average Power (dBm) Measured Results

SAR for LTE Band 5 (Frequency range: 824 - 849 MHz) is covered by LTE Band 26 (Frequency range: 814 – 849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 7 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz		
LTE Band 7	20	Max Power (dBm)		20.3				20.8				25.3				22.0						
		QPSK	1	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.0	25.0	25.3	0.0	22.0	22.0	22.0		
			1	49	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.3	25.3	25.3	0.0	22.0	22.0	22.0		
			1	99	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.3	25.3	25.1	0.0	22.0	22.0	22.0		
			50	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.3	24.0	24.0	0.0	22.0	22.0	22.0		
			50	24	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.3	24.3	24.3	0.0	22.0	22.0	22.0		
			50	49	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.3	24.2	0.0	22.0	22.0	22.0		
		100	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.3	24.0	0.0	22.0	22.0	22.0			
		16QAM	1	0	0.0	20.3	20.3	20.3	0.0	20.7	20.8	20.8	1.0	24.3	24.2	24.3	0.0	22.0	22.0	22.0		
			1	49	0.0	20.2	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.3	24.3	0.0	22.0	22.0	22.0		
			1	99	0.0	20.3	20.3	20.2	0.0	20.8	20.6	20.8	1.0	24.3	24.3	24.0	0.0	22.0	22.0	22.0		
			50	0	0.2	20.1	20.1	20.1	0.7	20.1	19.0	20.1	2.0	23.3	23.3	23.1	0.0	22.0	22.0	22.0		
			50	24	0.2	20.1	20.1	20.1	0.7	20.1	20.1	20.1	2.0	23.3	23.3	23.3	0.0	22.0	22.0	22.0		
			50	49	0.2	20.1	20.0	20.1	0.7	20.0	20.1	20.1	2.0	23.2	23.1	23.3	0.0	22.0	22.0	22.0		
		64QAM	100	0	0.2	20.1	20.1	20.1	0.7	20.1	20.1	19.0	2.0	23.3	23.3	23.3	0.0	22.0	22.0	22.0		
			1	0	0.2	20.1	20.1	20.0	0.7	20.1	20.1	20.1	2.0	23.3	23.3	23.3	0.0	22.0	22.0	22.0		
			1	49	0.2	20.0	20.1	20.1	0.7	20.1	20.0	20.1	2.0	23.3	23.2	23.3	0.0	22.0	22.0	22.0		
			1	99	0.2	20.1	20.1	20.1	0.7	20.1	20.1	20.1	2.0	23.3	23.3	23.3	0.0	22.0	22.0	22.0		
			50	0	1.2	19.1	19.1	19.1	1.7	19.1	19.1	19.1	3.0	22.3	22.3	22.1	0.2	21.5	21.1	21.0		
			50	24	1.2	19.0	19.1	19.1	1.7	19.1	19.0	19.1	3.0	22.3	22.2	22.3	0.2	21.3	21.4	21.5		
		LTE Band 7	15	QPSK	50	49	1.2	19.1	19.1	19.0	1.7	19.0	19.1	18.9	3.0	22.1	22.3	22.3	0.2	21.4	21.8	21.6
					100	0	1.2	19.1	19.1	19.1	1.7	19.1	19.1	19.1	3.0	22.3	22.3	22.3	0.2	21.6	21.2	21.4
16QAM	1				0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.2	25.3	25.3	0.0	22.0	22.0	22.0	
	1				36	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.2	25.3	25.1	0.0	22.0	22.0	22.0	
	1				74	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.0	25.1	25.0	0.0	22.0	22.0	22.0	
	36				0	0.0	20.3	20.1	20.3	0.0	20.8	20.8	20.8	1.0	24.1	24.0	24.3	0.0	22.0	22.0	22.0	
	36			18	0.0	20.0	20.3	20.3	0.0	20.8	20.8	20.7	1.0	24.1	24.1	24.1	0.0	22.0	22.0	22.0		
	36			37	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.3	24.3	24.3	0.0	22.0	22.0	22.0		
64QAM	75			0	0.0	20.3	20.3	20.3	0.0	20.6	20.8	20.8	1.0	24.0	24.2	24.1	0.0	22.0	22.0	22.0		
	1			0	0.0	20.3	20.0	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.0	24.0	0.0	22.0	22.0	22.0		
	1			36	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.0	24.2	24.1	0.0	22.0	22.0	22.0		
	1			74	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.6	1.0	24.2	24.2	24.0	0.0	22.0	22.0	22.0		
	36			0	0.2	19.4	19.2	19.9	0.7	19.8	19.5	19.9	2.0	23.1	23.2	23.2	0.0	22.0	22.0	22.0		
	36			18	0.2	19.3	19.5	19.9	0.7	19.5	19.2	19.5	2.0	23.1	23.2	23.3	0.0	22.0	22.0	22.0		
64QAM	36			37	0.2	19.4	19.0	19.4	0.7	19.7	19.5	19.1	2.0	23.2	23.2	23.2	0.0	22.0	22.0	22.0		
	75			0	0.2	19.1	19.8	19.6	0.7	19.1	19.9	19.3	2.0	23.1	23.3	23.1	0.0	22.0	22.0	22.0		
	1			0	0.2	19.3	19.5	19.1	0.7	19.3	19.3	19.6	2.0	23.3	23.2	23.2	0.0	22.0	22.0	22.0		
	1			36	0.2	19.3	19.2	19.7	0.7	19.7	19.4	19.6	2.0	23.1	23.3	23.0	0.0	22.0	22.0	22.0		
	1			74	0.2	19.6	19.2	19.3	0.7	19.8	19.6	19.0	2.0	23.3	23.1	23.2	0.0	22.0	22.0	22.0		
	36			0	1.2	18.8	18.9	18.9	1.7	19.0	19.1	19.0	3.0	22.1	22.0	22.3	0.2	21.2	21.4	21.0		
64QAM	36			18	1.2	19.0	19.1	19.1	1.7	19.1	19.0	19.1	3.0	22.2	22.2	22.1	0.2	21.7	21.2	21.4		
	36			37	1.2	19.0	19.1	19.0	1.7	18.9	19.0	19.0	3.0	22.2	22.2	22.2	0.2	21.8	21.4	21.7		
	75	0	1.2	18.9	19.0	19.1	1.7	18.9	19.0	19.0	3.0	22.2	22.1	22.3	0.2	21.0	21.1	21.0				

LTE Band 7 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.2	25.2	25.2	0.0	22.0	22.0	22.0
			1	24	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.2	25.1	25.0	0.0	22.0	22.0	22.0
			1	49	0.0	20.2	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.2	25.2	25.1	0.0	22.0	22.0	22.0
			25	0	0.0	20.3	20.3	20.1	0.0	20.6	20.6	20.8	1.0	24.2	24.2	24.1	0.0	22.0	22.0	22.0
			25	12	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.0	24.0	24.1	0.0	22.0	22.0	22.0
			25	24	0.0	20.3	20.2	20.3	0.0	20.8	20.8	20.7	1.0	24.2	24.2	24.2	0.0	22.0	22.0	22.0
		16QAM	50	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.1	24.1	24.2	0.0	22.0	22.0	22.0
			1	0	0.0	20.2	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.1	24.3	0.0	22.0	22.0	22.0
			1	24	0.0	20.3	20.3	20.3	0.0	20.6	20.8	20.8	1.0	24.2	24.2	24.1	0.0	22.0	22.0	22.0
			1	49	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.3	24.3	24.2	0.0	22.0	22.0	22.0
			25	0	0.2	19.3	19.1	19.7	0.0	20.8	20.8	20.8	2.0	23.3	23.3	23.2	0.0	22.0	22.0	22.0
			25	12	0.2	19.2	19.6	19.5	0.7	20.0	19.4	19.5	2.0	23.1	23.2	23.1	0.0	22.0	22.0	22.0
		64QAM	25	24	0.2	19.8	19.1	19.5	0.7	19.4	19.6	19.1	2.0	23.2	23.3	23.1	0.0	22.0	22.0	22.0
			50	0	0.2	19.1	19.3	19.7	0.7	19.3	19.1	20.0	2.0	23.1	23.1	23.0	0.0	22.0	22.0	22.0
			1	0	0.2	19.2	19.7	20.0	0.7	20.0	19.8	19.1	2.0	23.2	23.1	23.1	0.0	22.0	22.0	22.0
			1	24	0.2	19.4	19.8	20.0	0.7	19.4	19.4	19.2	2.0	23.2	23.1	23.1	0.0	22.0	22.0	22.0
			1	49	0.2	20.0	19.0	19.4	0.7	19.9	19.7	19.3	2.0	23.2	23.3	23.1	0.0	22.0	22.0	22.0
			25	0	1.2	18.8	19.1	19.1	1.7	19.0	19.1	19.0	3.0	22.2	22.1	22.3	0.2	21.0	21.3	21.2
			25	12	1.2	18.8	19.1	18.9	1.7	19.1	19.0	19.0	3.0	22.2	22.1	22.3	0.2	21.5	21.3	21.1
			25	24	1.2	19.1	19.1	19.0	1.7	19.0	19.1	19.0	3.0	22.1	22.1	22.2	0.2	21.1	21.6	21.2
			50	0	1.2	19.1	18.8	19.1	1.7	18.9	18.9	19.0	3.0	22.1	22.2	22.1	0.2	21.5	21.8	21.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.1	25.1	25.2	0.0	22.0	22.0	22.0
			1	12	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.1	25.1	25.2	0.0	22.0	22.0	22.0
			1	24	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	0.0	25.1	25.1	25.3	0.0	22.0	22.0	22.0
			12	0	0.0	20.3	20.1	20.3	0.0	20.6	20.8	20.8	1.0	24.1	24.1	24.1	0.0	22.0	22.0	22.0
			12	7	0.0	20.2	20.3	20.3	0.0	20.8	20.6	20.8	1.0	24.3	24.2	24.3	0.0	22.0	22.0	22.0
			12	13	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.1	24.1	0.0	22.0	22.0	22.0
		16QAM	25	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.2	24.1	24.0	0.0	22.0	22.0	22.0
			1	0	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.6	1.0	24.0	24.1	24.2	0.0	22.0	22.0	22.0
			1	12	0.0	20.3	20.3	20.3	0.0	20.8	20.8	20.8	1.0	24.1	24.1	24.2	0.0	22.0	22.0	22.0
			1	24	0.0	20.3	20.3	20.1	0.0	20.8	20.8	20.8	1.0	24.2	24.0	24.2	0.0	22.0	22.0	22.0
			12	0	0.2	19.8	19.1	19.6	0.7	19.2	19.6	20.1	2.0	23.1	23.3	23.0	0.0	22.0	22.0	22.0
			12	7	0.2	19.1	19.3	19.8	0.7	19.3	19.4	19.4	2.0	23.3	23.3	23.0	0.0	22.0	22.0	22.0
		64QAM	12	13	0.2	19.9	19.9	19.8	0.7	19.7	19.7	20.0	2.0	23.0	23.0	23.1	0.0	22.0	22.0	22.0
			25	0	0.2	19.8	19.2	19.2	0.7	19.1	19.1	19.0	2.0	23.3	23.2	23.1	0.0	22.0	22.0	22.0
			1	0	0.2	19.7	19.2	19.1	0.7	19.9	19.6	20.0	2.0	23.1	23.0	23.1	0.0	22.0	22.0	22.0
			1	12	0.2	20.0	19.9	19.3	0.7	19.7	19.4	19.4	2.0	23.3	23.2	23.0	0.0	22.0	22.0	22.0
			1	24	0.2	19.1	20.0	19.5	0.7	19.0	19.6	19.3	2.0	23.1	23.1	23.3	0.0	22.0	22.0	22.0
			12	0	1.2	19.0	19.0	19.0	1.7	19.0	18.9	18.9	3.0	22.2	22.1	22.0	0.2	21.1	21.3	21.1
			12	7	1.2	19.1	19.0	19.0	1.7	18.9	19.0	19.1	3.0	22.2	22.3	22.2	0.2	21.8	21.8	21.5
			12	13	1.2	19.1	19.1	19.1	1.7	19.1	19.1	19.0	3.0	22.1	22.1	22.0	0.2	21.3	21.6	21.5
			25	0	1.2	18.9	19.1	18.9	1.7	18.9	19.1	19.1	3.0	22.0	22.1	22.0	0.2	21.5	21.5	21.4

LTE Band 12 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
			Max Power (dBm)			24.0				24.0				24.8				24.8		
LTE Band 12	10	QPSK	1	0	0		24.0		0		24.0		0		24.8		0		24.8	
			1	24	0		24.0		0		24.0		0		24.8		0		24.8	
			1	49	0		24.0		0		24.0		0		24.8		0		24.8	
			25	0	1		23.0		1		23.0		1		23.8		1		23.8	
			25	12	1		23.0		1		23.0		1		23.8		1		23.8	
			25	24	1		23.0		1		23.0		1		23.8		1		23.8	
		16QAM	50	0	1		23.0		1		23.0		1		23.7		1		23.7	
			1	0	1		22.8		1		22.8		1		23.0		1		23.0	
			1	24	1		23.0		1		23.0		1		22.9		1		22.9	
			1	49	1		22.9		1		22.9		1		23.0		1		23.0	
			25	0	2		21.9		2		21.9		2		22.7		2		22.7	
			25	12	2		21.9		2		21.9		2		22.0		2		22.0	
		64QAM	25	24	2		21.8		2		21.8		2		22.4		2		22.4	
			50	0	2		21.8		2		21.8		2		22.7		2		22.7	
			1	0	2		21.8		2		21.8		2		22.0		2		22.0	
			1	24	2		21.9		2		21.9		2		22.3		2		22.3	
			1	49	2		22.0		2		22.0		2		22.1		2		22.1	
			25	0	3		20.9		3		20.9		3		21.4		3		21.4	
		64QAM	25	12	3		20.9		3		20.9		3		21.4		3		21.4	
			25	24	3		20.9		3		20.9		3		21.0		3		21.0	
			50	0	3		20.8		3		20.8		3		21.8		3		21.8	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.9	23.8	24.0	0	23.9	23.8	24.0	0	24.8	24.4	24.7	0	24.8	24.4	24.7
			1	12	0	23.9	24.0	23.8	0	23.9	24.0	23.8	0	24.2	24.5	24.5	0	24.2	24.5	24.5
			1	24	0	23.8	24.0	24.0	0	23.8	24.0	24.0	0	24.2	24.0	24.3	0	24.2	24.0	24.3
			12	0	1	22.9	22.9	22.8	1	22.9	22.9	22.8	1	23.1	23.3	23.1	1	23.1	23.3	23.1
			12	7	1	22.8	22.9	23.0	1	22.8	22.9	23.0	1	23.4	23.6	23.7	1	23.4	23.6	23.7
			12	13	1	22.9	22.8	23.0	1	22.9	22.8	23.0	1	23.7	23.4	23.3	1	23.7	23.4	23.3
		16QAM	25	0	1	22.9	22.8	22.8	1	22.9	22.8	22.8	1	23.5	23.3	23.6	1	23.5	23.3	23.6
			1	0	1	23.0	22.8	22.9	1	23.0	22.8	22.9	1	23.4	23.1	23.1	1	23.4	23.1	23.1
			1	12	1	23.0	22.8	23.0	1	23.0	22.8	23.0	1	23.0	23.0	23.3	1	23.0	23.0	23.3
			1	24	1	22.8	23.0	22.9	1	22.8	23.0	22.9	1	23.6	23.3	23.2	1	23.6	23.3	23.2
			12	0	2	21.9	21.9	21.8	2	21.9	21.9	21.8	2	22.6	22.6	22.7	2	22.6	22.6	22.7
			12	7	2	22.0	21.9	21.9	2	22.0	21.9	21.9	2	22.1	22.6	22.4	2	22.1	22.6	22.4
		64QAM	12	13	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.1	22.0	22.7	2	22.1	22.0	22.7
			25	0	2	21.9	21.9	22.0	2	21.9	21.9	22.0	2	22.6	22.4	21.9	2	22.6	22.4	21.9
			1	0	2	21.9	21.9	21.8	2	21.9	21.9	21.8	2	22.7	22.1	22.3	2	22.7	22.1	22.3
			1	12	2	22.0	21.9	21.9	2	22.0	21.9	21.9	2	22.0	22.5	21.9	2	22.0	22.5	21.9
			1	24	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.0	22.4	22.5	2	22.0	22.4	22.5
			12	0	3	20.9	21.0	21.0	3	20.9	21.0	21.0	3	21.7	21.5	21.4	3	21.7	21.5	21.4
		64QAM	12	7	3	20.8	21.0	20.9	3	20.8	21.0	20.9	3	21.0	21.1	20.9	3	21.0	21.1	20.9
			12	13	3	20.9	20.9	20.9	3	20.9	20.9	20.9	3	21.3	21.2	21.0	3	21.3	21.2	21.0
			25	0	3	20.9	20.8	20.9	3	20.9	20.8	20.9	3	21.0	21.3	21.8	3	21.0	21.3	21.8

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		
LTE Band 12	3	QPSK	1	0	0	23.9	23.9	24.0	0	23.9	23.9	24.0	0	24.0	24.2	24.5	0	24.0	24.2	24.5		
			1	8	0	23.9	23.9	23.8	0	23.9	23.9	23.8	0	24.1	24.3	23.9	0	24.1	24.3	23.9		
			1	14	0	24.0	23.9	23.9	0	24.0	23.9	23.9	0	24.4	24.2	24.3	0	24.4	24.2	24.3		
			8	0	1	22.9	22.8	22.9	1	22.9	22.8	22.9	1	23.8	23.0	23.6	1	23.8	23.0	23.6		
			8	4	1	23.0	22.8	22.9	1	23.0	22.8	22.9	1	23.3	23.2	23.7	1	23.3	23.2	23.7		
			8	7	1	22.8	22.8	22.8	1	22.8	22.8	22.8	1	23.3	22.9	23.2	1	23.3	22.9	23.2		
		16QAM	15	0	1	22.9	22.8	23.0	1	22.9	22.8	23.0	1	23.7	23.2	23.3	1	23.7	23.2	23.3		
			1	0	1	22.9	23.0	23.0	1	22.9	23.0	23.0	1	23.6	23.5	23.1	1	23.6	23.5	23.1		
			1	8	1	22.9	23.0	22.9	1	22.9	23.0	22.9	1	23.6	23.1	23.5	1	23.6	23.1	23.5		
			1	14	1	22.9	22.9	22.9	1	22.9	22.9	22.9	1	23.7	22.9	23.0	1	23.7	22.9	23.0		
			8	0	2	22.0	22.0	21.9	2	22.0	22.0	21.9	2	22.7	22.8	22.2	2	22.7	22.8	22.2		
			8	4	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.0	22.2	22.7	2	22.0	22.2	22.7		
		64QAM	8	7	2	22.0	21.8	21.9	2	22.0	21.8	21.9	2	22.4	21.9	22.1	2	22.4	21.9	22.1		
			15	0	2	21.9	21.9	21.8	2	21.9	21.9	21.8	2	22.1	22.7	22.0	2	22.1	22.7	22.0		
			1	0	2	21.8	21.8	22.0	2	21.8	21.8	22.0	2	22.6	22.1	22.6	2	22.6	22.1	22.6		
			1	8	2	22.0	21.8	21.9	2	22.0	21.8	21.9	2	22.1	21.9	22.1	2	22.1	21.9	22.1		
			1	14	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.6	22.3	22.5	2	22.6	22.3	22.5		
			8	0	3	20.9	20.9	20.9	3	20.9	20.9	20.9	3	21.5	21.7	21.1	3	21.5	21.7	21.1		
		64QAM	8	4	3	20.9	20.8	20.8	3	20.9	20.8	20.8	3	21.4	21.3	21.1	3	21.4	21.3	21.1		
			8	7	3	20.9	21.0	20.8	3	20.9	21.0	20.8	3	21.3	21.2	21.1	3	21.3	21.2	21.1		
			15	0	3	21.0	20.9	20.8	3	21.0	20.9	20.8	3	21.7	20.9	21.4	3	21.7	20.9	21.4		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		
LTE Band 12	14	QPSK	1	0	0	23.9	23.9	23.9	0	23.9	23.9	23.9	0	24.7	24.1	24.6	0	24.7	24.1	24.6		
			1	2	0	23.9	23.9	24.0	0	23.9	23.9	24.0	0	24.6	24.5	24.7	0	24.6	24.5	24.7		
			1	5	0	23.9	23.9	24.0	0	23.9	23.9	24.0	0	24.7	24.5	24.0	0	24.7	24.5	24.0		
			3	0	0	23.9	23.8	23.9	0	23.9	23.8	23.9	0	24.6	24.6	24.5	0	24.6	24.6	24.5		
			3	1	0	23.8	24.0	24.0	0	23.8	24.0	24.0	0	24.3	24.8	24.4	0	24.3	24.8	24.4		
			3	2	0	23.8	23.9	23.9	0	23.8	23.9	23.9	0	24.8	24.3	24.4	0	24.8	24.3	24.4		
		16QAM	6	0	1	23.0	22.9	22.8	1	23.0	22.9	22.8	1	23.3	23.3	23.5	1	23.3	23.3	23.5		
			1	0	1	22.9	22.9	22.8	1	22.9	22.9	22.8	1	22.9	23.3	23.0	1	22.9	23.3	23.0		
			1	2	1	22.9	22.8	23.0	1	22.9	22.8	23.0	1	23.7	23.2	23.0	1	23.7	23.2	23.0		
			1	5	1	22.9	23.0	22.9	1	22.9	23.0	22.9	1	23.0	23.6	22.9	1	23.0	23.6	22.9		
			3	0	1	23.0	22.9	22.9	1	23.0	22.9	22.9	1	23.6	23.6	23.4	1	23.6	23.6	23.4		
			3	1	1	23.0	22.9	22.8	1	23.0	22.9	22.8	1	23.6	23.5	23.0	1	23.6	23.5	23.0		
		64QAM	3	2	1	22.9	23.0	22.9	1	22.9	23.0	22.9	1	23.3	23.1	23.5	1	23.3	23.1	23.5		
			6	0	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.4	22.6	22.4	2	22.4	22.6	22.4		
			1	0	2	21.9	21.8	21.9	2	21.9	21.8	21.9	2	22.5	22.1	22.5	2	22.5	22.1	22.5		
			1	2	2	22.0	21.8	21.9	2	22.0	21.8	21.9	2	21.9	22.7	22.4	2	21.9	22.7	22.4		
			1	5	2	22.0	21.9	21.8	2	22.0	21.9	21.8	2	22.0	21.9	22.8	2	22.0	21.9	22.8		
			3	0	2	21.9	21.8	21.9	2	21.9	21.8	21.9	2	22.7	22.2	22.6	2	22.7	22.2	22.6		
		64QAM	3	1	2	21.9	21.8	22.0	2	21.9	21.8	22.0	2	21.9	22.1	22.3	2	21.9	22.1	22.3		
			3	2	2	21.9	21.8	21.9	2	21.9	21.8	21.9	2	22.4	22.1	22.7	2	22.4	22.1	22.7		
			6	0	3	20.8	21.0	20.9	3	20.8	21.0	20.9	3	21.5	21.7	21.6	3	21.5	21.7	21.6		

LTE Band 13 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A				MODE B							
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1	
							782 MHz			782 MHz			782 MHz			782 MHz
LTE Band 13	10	Max Power (dBm)				24.0			24.0			24.8			24.8	
		QPSK	1	0	0		24.0		0		24.0		0		24.8	
			1	24	0		24.0		0		24.0		0		24.8	
			1	49	0		24.0		0		24.0		0		24.8	
			25	0	1		23.0		1		23.0		1		23.8	
			25	12	1		23.0		1		23.0		1		23.8	
			25	24	1		23.0		1		23.0		1		23.8	
		16QAM	50	0	1		23.0		1		23.0		1		23.8	
			1	0	1		22.9		1		22.9		1		23.8	
			1	24	1		22.9		1		22.8		1		23.5	
			1	49	1		22.9		1		22.9		1		23.1	
			25	0	2		21.9		2		21.9		2		22.2	
			25	12	2		21.9		2		21.9		2		22.6	
		64QAM	25	24	2		22.0		2		22.0		2		22.1	
			50	0	2		21.9		2		21.9		2		22.7	
			1	0	2		21.9		2		21.9		2		22.2	
			1	24	2		21.9		2		21.9		2		22.6	
			1	49	2		22.0		2		22.0		2		21.9	
			25	0	3		21.0		3		21.0		3		20.9	
			25	12	3		21.0		3		21.0		3		21.5	
			25	24	3		21.0		3		21.0		3		21.2	
			50	0	3		21.0		3		21.0		3		21.3	

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A				MODE B							
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1	
							782 MHz			782 MHz			782 MHz			782 MHz
LTE Band 13	5	QPSK	1	0	0		23.9		0		23.9		0		24.2	
			1	12	0		23.8		0		23.8		0		24.8	
			1	24	0		24.0		0		24.0		0		24.5	
			12	0	1		23.0		1		23.0		1		23.6	
			12	7	1		22.9		1		22.9		1		23.4	
			12	13	1		22.8		1		22.8		1		23.6	
		16QAM	25	0	1		22.9		1		22.9		1		23.7	
			1	0	1		22.8		1		22.8		1		23.7	
			1	12	1		22.9		1		22.9		1		23.2	
			1	24	1		22.9		1		22.9		1		23.8	
			12	0	2		21.9		2		21.9		2		22.3	
			12	7	2		21.8		2		21.8		2		22.0	
		64QAM	12	13	2		21.9		2		21.9		2		22.7	
			25	0	2		21.9		2		21.9		2		22.2	
			1	0	2		21.8		2		21.8		2		22.0	
			1	12	2		21.9		2		21.9		2		22.6	
			1	24	2		21.9		2		21.9		2		22.3	
			12	0	3		21.0		3		21.0		3		21.0	
			12	7	3		21.0		3		21.0		3		21.5	
			12	13	3		21.0		3		21.0		3		21.7	
			25	0	3		21.0		3		21.0		3		21.3	

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Average Power (dBm) Measured Results

SAR for LTE Band 17 (Frequency range: 704 – 716 MHz) is covered by LTE Band 12 (Frequency range: 699 – 716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 25 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz		
LTE Band 25	Max Power (dBm)				19.5				20.8				25.3				23.3					
	20	QPSK	1	0	0	19.5	19.5	19.5	0.0	20.8	20.8	20.8	0.0	25.3	25.3	25.3	0.0	23.2	23.2	23.3		
			1	49	0	19.5	19.5	19.5	0.0	20.8	20.8	20.8	0.0	25.3	25.3	25.3	0.0	23.2	23.2	23.3		
			1	99	0	19.5	19.5	19.5	0.0	20.8	20.8	20.8	0.0	25.3	25.3	25.3	0.0	23.2	23.2	23.3		
			50	0	0	19.5	19.5	19.5	1.0	19.8	19.8	19.8	1.0	24.3	24.3	24.3	0.0	23.2	23.3	23.3		
			50	24	0	19.5	19.5	19.5	1.0	19.8	19.8	19.8	1.0	24.3	24.3	24.3	0.0	23.2	23.3	23.3		
			50	49	0	19.5	19.5	19.5	1.0	19.8	19.8	19.8	1.0	24.3	24.3	24.3	0.0	23.2	23.3	23.3		
		16QAM	100	0	0	19.5	19.5	19.5	1.0	19.5	19.5	19.5	1.0	24.3	24.3	24.3	0.0	23.2	23.3	23.3		
			1	0	0	19.4	19.5	19.5	1.0	19.8	19.8	19.8	1.0	24.1	24.3	24.2	0.0	23.0	23.2	23.2		
			1	49	0	19.5	19.5	19.5	1.0	19.5	19.8	19.7	1.0	24.1	24.0	24.0	0.0	23.1	23.2	23.1		
			1	99	0	19.5	19.5	19.5	1.0	19.8	19.5	19.8	1.0	24.3	24.2	24.2	0.0	23.3	23.2	23.0		
			50	0	0.7	18.8	18.7	18.8	2.0	18.8	18.8	18.8	2.0	23.1	23.3	23.2	0.0	23.1	23.2	23.1		
			50	24	0.7	18.6	18.8	18.8	2.0	18.8	18.8	18.7	2.0	23.2	23.2	23.2	0.0	23.2	23.1	23.1		
		64QAM	50	49	0.7	18.8	18.8	18.6	2.0	18.6	18.8	18.8	2.0	23.2	23.1	23.2	0.0	23.0	23.0	23.1		
			100	0	0.7	18.7	18.8	18.7	2.0	18.8	18.8	18.8	2.0	23.1	23.0	23.2	0.0	23.0	23.0	23.2		
			1	0	0.7	18.8	18.7	18.8	2.0	18.8	18.7	18.8	2.0	23.1	23.2	23.1	0.0	23.1	23.3	23.1		
			1	49	0.7	18.8	18.8	18.8	2.0	18.8	18.8	18.6	2.0	23.2	23.2	23.1	0.0	23.1	23.0	23.1		
			1	99	0.7	18.8	18.8	18.8	2.0	18.8	18.8	18.8	2.0	23.1	23.0	23.1	0.0	23.1	23.1	23.1		
			50	0	1.7	17.7	17.7	17.8	3.0	17.6	17.8	17.7	3.0	22.1	22.2	22.3	1.0	22.2	22.0	22.2		
			50	24	1.7	17.8	17.8	17.7	3.0	17.8	17.8	17.8	3.0	22.0	22.2	22.3	1.0	22.3	22.0	22.2		
			50	49	1.7	17.6	17.7	17.8	3.0	17.8	17.7	17.8	3.0	22.0	22.3	22.0	1.0	22.2	22.0	22.0		
		16QAM	100	0	1.7	17.8	17.8	17.7	3.0	17.8	17.8	17.8	3.0	22.0	22.2	22.1	1.0	22.1	22.1	22.2		
			15	QPSK	1	0	0	18.9	19.2	19.2	0.0	20.5	20.8	20.7	0.0	25.1	25.1	25.0	0.0	23.1	23.0	23.2
					1	36	0	19.4	19.0	19.4	0.0	20.7	20.6	20.6	0.0	25.2	25.2	25.3	0.0	23.1	23.1	23.3
					1	74	0	19.0	19.4	19.2	0.0	20.5	20.6	20.8	0.0	25.2	25.3	25.1	0.0	23.1	23.2	23.2
					36	0	0	19.2	19.1	19.1	1.0	19.7	19.7	19.5	1.0	24.2	24.2	24.0	0.0	23.3	23.2	23.1
					36	18	0	19.0	19.4	18.9	1.0	19.7	19.7	19.7	1.0	24.2	24.1	24.2	0.0	23.2	23.2	23.3
		36			37	0	18.9	19.4	19.1	1.0	19.7	19.8	19.6	1.0	24.2	24.2	24.2	0.0	23.1	23.2	23.2	
		16QAM		75	0	0	19.3	19.3	19.1	1.0	19.8	19.5	19.7	1.0	24.2	24.1	24.2	0.0	23.0	23.1	23.0	
1	0			0	19.1	19.1	19.4	1.0	19.6	19.7	19.5	1.0	24.2	24.3	24.2	0.0	23.1	23.2	23.2			
1	36			0	19.2	19.3	19.4	1.0	19.6	19.7	19.5	1.0	24.0	24.3	24.1	0.0	23.1	23.3	23.1			
1	74			0	19.0	19.3	19.5	1.0	19.5	19.6	19.6	1.0	24.1	24.2	24.1	0.0	23.3	23.3	23.1			
36	0			0.7	18.5	18.8	18.7	2.0	18.6	18.7	18.8	2.0	23.3	23.0	23.3	0.0	23.0	23.2	23.2			
36	18			0.7	18.5	18.8	18.7	2.0	18.6	18.5	18.5	2.0	23.2	23.1	23.1	0.0	23.0	23.0	23.1			
64QAM	36	37		0.7	18.7	18.8	18.6	2.0	18.6	18.5	18.6	2.0	23.1	23.3	23.3	0.0	23.1	23.0	23.3			
	75	0		0.7	18.8	18.5	18.7	2.0	18.7	18.6	18.7	2.0	23.2	23.2	23.2	0.0	23.1	23.1	23.0			
	1	0		0.7	18.6	18.6	18.8	2.0	18.5	18.6	18.6	2.0	23.1	23.2	23.1	0.0	23.3	23.3	23.2			
	1	36		0.7	18.6	18.7	18.8	2.0	18.8	18.7	18.6	2.0	23.2	23.0	23.1	0.0	23.2	23.0	23.2			
	1	74		0.7	18.6	18.6	18.7	2.0	18.6	18.7	18.8	2.0	23.0	23.2	23.3	0.0	23.0	23.2	23.2			
	36	0		1.7	17.6	17.6	17.7	3.0	17.6	17.6	17.7	3.0	22.2	22.2	22.2	1.0	22.3	22.2	22.1			
	36	18	1.7	17.8	17.5	17.6	3.0	17.6	17.7	17.6	3.0	22.1	22.1	22.1	1.0	22.1	22.1	22.2				
	36	37	1.7	17.7	17.7	17.5	3.0	17.5	17.5	17.6	3.0	22.2	22.1	22.1	1.0	22.2	22.0	22.1				
15	15	15	75	0	1.7	17.8	17.8	17.6	3.0	17.7	17.6	17.6	3.0	22.2	22.2	22.3	1.0	22.2	22.1	22.2		

LTE Band 25 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz
LTE Band 25	10	QPSK	1	0	0	18.9	19.2	19.1	0.0	20.6	20.6	20.7	0.0	25.1	25.3	25.3	0.0	23.1	23.3	23.3
			1	24	0	19.0	19.3	19.3	0.0	20.7	20.5	20.8	0.0	25.2	25.2	25.3	0.0	23.0	23.3	23.3
			1	49	0	19.2	19.3	19.0	0.0	20.8	20.6	20.6	0.0	25.3	25.1	25.0	0.0	23.3	23.3	23.2
			25	0	0	19.3	19.3	19.4	1.0	19.7	19.7	19.6	1.0	24.2	24.1	24.2	0.0	23.2	23.1	23.2
			25	12	0	19.1	19.1	19.4	1.0	19.6	19.7	19.6	1.0	24.2	24.2	24.0	0.0	23.1	23.3	23.2
			25	24	0	19.0	19.1	19.4	1.0	19.6	19.7	19.6	1.0	24.2	24.2	24.1	0.0	23.0	23.2	23.0
		16QAM	50	0	0	19.2	19.4	19.4	1.0	19.7	19.6	19.7	1.0	24.1	24.3	24.2	0.0	23.2	23.2	23.2
			1	0	0	19.0	18.9	19.5	1.0	19.6	19.7	19.5	1.0	24.1	24.1	24.2	0.0	23.0	23.1	23.3
			1	24	0	19.4	18.9	19.4	1.0	19.7	19.7	19.6	1.0	24.0	24.1	24.2	0.0	23.1	23.2	23.1
			1	49	0	19.2	19.3	19.1	1.0	19.6	19.6	19.6	1.0	24.1	24.2	24.0	0.0	23.3	23.2	23.2
			25	0	0.7	18.7	18.7	18.7	2.0	18.6	18.6	18.7	2.0	23.1	23.2	23.2	0.0	23.3	23.2	23.1
			25	12	0.7	18.5	18.7	18.7	2.0	18.7	18.7	18.6	2.0	23.1	23.1	23.0	0.0	23.2	23.1	23.2
		64QAM	25	24	0.7	18.6	18.6	18.7	2.0	18.7	18.7	18.6	2.0	23.1	23.0	23.1	0.0	23.3	23.1	23.0
			50	0	0.7	18.7	18.7	18.6	2.0	18.8	18.8	18.7	2.0	23.1	23.2	23.3	0.0	23.1	23.0	23.2
			1	0	0.7	18.8	18.7	18.6	2.0	18.8	18.6	18.8	2.0	23.3	23.2	23.0	0.0	23.2	23.0	23.2
			1	24	0.7	18.7	18.7	18.7	2.0	18.6	18.5	18.6	2.0	23.3	23.1	23.1	0.0	23.1	23.2	23.1
			1	49	0.7	18.7	18.8	18.6	2.0	18.5	18.7	18.6	2.0	23.2	23.2	23.3	0.0	23.1	23.2	23.2
			25	0	1.7	17.8	17.7	17.8	3.0	17.6	17.7	17.7	3.0	22.1	22.2	22.2	1.0	22.2	22.2	22.3
			25	12	1.7	17.6	17.5	17.6	3.0	17.7	17.7	17.7	3.0	22.1	22.1	22.1	1.0	22.2	22.1	22.1
			25	24	1.7	17.7	17.6	17.6	3.0	17.6	17.7	17.8	3.0	22.2	22.2	22.1	1.0	22.0	22.0	22.2
		50	0	1.7	17.6	17.8	17.6	3.0	17.6	17.8	17.6	3.0	22.1	22.1	22.2	1.0	22.1	22.2	22.1	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz
LTE Band 25	5	QPSK	1	0	0	19.1	19.3	19.1	0.0	20.7	20.7	20.5	0.0	25.0	25.3	25.0	0.0	23.2	23.2	23.1
			1	12	0	19.4	19.2	19.2	0.0	20.8	20.8	20.7	0.0	25.2	25.2	25.2	0.0	23.2	23.1	23.0
			1	24	0	19.4	19.1	19.4	0.0	20.6	20.8	20.6	0.0	25.1	25.1	25.0	0.0	23.2	23.0	23.1
			12	0	0	19.2	19.2	19.4	1.0	19.8	19.8	19.7	1.0	24.2	24.2	24.0	0.0	23.0	23.2	23.2
			12	7	0	19.2	19.0	19.2	1.0	19.8	19.8	19.7	1.0	24.1	24.2	24.3	0.0	23.1	23.0	23.2
			12	13	0	19.4	19.1	19.2	1.0	19.6	19.6	19.8	1.0	24.3	24.2	24.1	0.0	23.1	23.1	23.1
		16QAM	25	0	0	19.2	19.4	19.2	1.0	19.8	19.7	19.5	1.0	24.3	24.3	24.1	0.0	23.2	23.1	23.2
			1	0	0	19.4	19.3	19.4	1.0	19.6	19.5	19.8	1.0	24.3	24.2	24.1	0.0	23.2	23.1	23.0
			1	12	0	19.2	19.1	19.4	1.0	19.7	19.8	19.5	1.0	24.1	24.1	24.2	0.0	23.3	23.3	23.2
			1	24	0	19.4	19.0	19.1	1.0	19.5	19.7	19.5	1.0	24.3	24.2	24.1	0.0	23.1	23.0	23.3
			12	0	0.7	18.5	18.6	18.7	2.0	18.5	18.5	18.5	2.0	23.2	23.2	23.2	0.0	23.3	23.1	23.3
			12	7	0.7	18.8	18.8	18.7	2.0	18.8	18.6	18.6	2.0	23.0	23.0	23.3	0.0	23.2	23.2	23.1
		64QAM	12	13	0.7	18.5	18.6	18.6	2.0	18.7	18.7	18.7	2.0	23.2	23.2	23.2	0.0	23.3	23.1	23.2
			25	0	0.7	18.6	18.6	18.8	2.0	18.5	18.7	18.5	2.0	23.3	23.1	23.1	0.0	23.2	23.2	23.0
			1	0	0.7	18.7	18.8	18.5	2.0	18.7	18.6	18.7	2.0	23.2	23.0	23.1	0.0	23.0	23.2	23.2
			1	12	0.7	18.7	18.8	18.5	2.0	18.6	18.5	18.6	2.0	23.2	23.1	23.2	0.0	23.1	23.2	23.1
			1	24	0.7	18.6	18.6	18.7	2.0	18.5	18.6	18.6	2.0	23.2	23.2	23.2	0.0	23.1	23.1	23.1
			12	0	1.7	17.7	17.8	17.7	3.0	17.5	17.7	17.5	3.0	22.2	22.2	22.1	1.0	22.2	22.1	22.3
			12	7	1.7	17.8	17.6	17.7	3.0	17.6	17.7	17.7	3.0	22.3	22.1	22.1	1.0	22.1	22.2	22.1
			25	13	1.7	17.6	17.6	17.8	3.0	17.7	17.8	17.8	3.0	22.2	22.0	22.1	1.0	22.1	22.2	22.1

LTE Band 25 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz
LTE Band 25	3	QPSK	1	0	0	19.5	19.4	19.1	0.0	20.7	20.6	20.7	0.0	25.2	25.3	25.2	0.0	23.2	23.1	23.3
			1	8	0	19.3	19.1	19.1	0.0	20.8	20.6	20.8	0.0	25.0	25.0	25.1	0.0	23.0	23.2	23.2
			1	14	0	19.1	19.1	19.4	0.0	20.5	20.8	20.5	0.0	25.2	25.1	25.1	0.0	23.3	23.0	23.3
			8	0	0	19.3	19.4	19.3	1.0	19.5	19.7	19.6	1.0	24.1	24.3	24.0	0.0	23.2	23.2	23.2
			8	4	0	19.4	19.3	19.2	1.0	19.5	19.8	19.5	1.0	24.2	24.1	24.3	0.0	23.1	23.3	23.2
			8	7	0	19.0	19.0	19.5	1.0	19.7	19.6	19.8	1.0	24.1	24.3	24.3	0.0	23.3	23.2	23.0
		16QAM	15	0	0	19.3	19.4	19.2	1.0	19.6	19.7	19.7	1.0	24.2	24.1	24.3	0.0	23.1	23.1	23.1
			1	0	0	19.0	19.0	19.5	1.0	19.5	19.5	19.6	1.0	24.1	24.1	24.0	0.0	23.3	23.1	23.1
			1	8	0	19.4	19.4	19.2	1.0	19.8	19.7	19.5	1.0	24.0	24.1	24.1	0.0	23.2	23.2	23.1
			1	14	0	19.4	19.1	19.3	1.0	19.7	19.6	19.8	1.0	24.3	24.1	24.1	0.0	23.2	23.2	23.2
			8	0	0.7	18.6	18.6	18.7	2.0	18.7	18.6	18.7	2.0	23.1	23.2	23.2	0.0	23.1	23.1	23.2
			8	4	0.7	18.6	18.6	18.7	2.0	18.6	18.8	18.7	2.0	23.1	23.1	23.1	0.0	23.1	23.2	23.0
		64QAM	8	7	0.7	18.8	18.7	18.7	2.0	18.8	18.7	18.8	2.0	23.0	23.1	23.1	0.0	23.2	23.1	23.1
			15	0	0.7	18.6	18.7	18.6	2.0	18.7	18.7	18.6	2.0	23.1	23.2	23.2	0.0	23.2	23.2	23.1
			1	0	0.7	18.5	18.6	18.6	2.0	18.6	18.7	18.8	2.0	23.1	23.3	23.1	0.0	23.2	23.2	23.0
			1	8	0.7	18.6	18.7	18.6	2.0	18.8	18.6	18.6	2.0	23.1	23.3	23.2	0.0	23.3	23.3	23.0
			1	14	0.7	18.6	18.6	18.6	2.0	18.5	18.7	18.6	2.0	23.2	23.2	23.3	0.0	23.1	23.2	23.0
			8	0	1.7	17.7	17.5	17.5	3.0	17.8	17.8	17.8	3.0	22.2	22.1	22.3	1.0	22.0	22.1	22.1
			8	4	1.7	17.7	17.7	17.7	3.0	17.8	17.8	17.5	3.0	22.2	22.2	22.2	1.0	22.1	22.0	22.3
			8	7	1.7	17.7	17.7	17.5	3.0	17.8	17.6	17.8	3.0	22.2	22.1	22.1	1.0	22.3	22.1	22.2
			15	0	1.7	17.8	17.7	17.7	3.0	17.8	17.5	17.8	3.0	22.3	22.1	22.0	1.0	22.3	22.2	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz
LTE Band 25	1.4	QPSK	1	0	0	19.3	19.5	19.4	0.0	20.8	20.8	20.5	0.0	25.1	25.2	25.1	0.0	23.2	23.1	23.0
			1	3	0	19.2	19.4	19.4	0.0	20.5	20.5	20.5	0.0	25.0	25.2	25.2	0.0	23.2	23.1	23.2
			1	5	0	19.5	19.2	19.5	0.0	20.7	20.7	20.7	0.0	25.2	25.1	25.0	0.0	23.3	23.2	23.0
			3	0	0	19.3	19.4	19.2	0.0	20.8	20.8	20.8	0.0	25.1	25.2	25.2	0.0	23.0	23.3	23.2
			3	1	0	19.2	19.3	19.2	0.0	20.7	20.5	20.6	0.0	25.2	25.1	25.0	0.0	23.1	23.0	23.2
			3	3	0	19.3	19.4	19.3	0.0	20.6	20.5	20.7	0.0	25.0	25.1	25.1	0.0	23.0	23.1	23.3
		16QAM	6	0	0	19.4	19.4	19.4	1.0	19.8	19.6	19.6	1.0	24.0	24.2	24.1	0.0	23.1	23.3	23.1
			1	0	0	19.2	19.4	19.5	1.0	19.6	19.7	19.6	1.0	24.1	24.0	24.2	0.0	23.2	23.1	23.0
			1	3	0	19.3	19.4	19.4	1.0	19.8	19.8	19.6	1.0	24.2	24.3	24.2	0.0	23.3	23.2	23.1
			1	5	0	19.5	19.4	19.3	1.0	19.8	19.6	19.6	1.0	24.1	24.1	24.1	0.0	23.2	23.2	23.1
			3	0	0	19.4	19.3	19.4	1.0	19.7	19.6	19.7	1.0	24.2	24.0	24.1	0.0	23.0	23.2	23.1
			3	1	0	19.2	19.5	19.2	1.0	19.6	19.6	19.6	1.0	24.1	24.1	24.3	0.0	23.3	23.2	23.2
		64QAM	3	3	0	19.4	19.5	19.3	1.0	19.5	19.8	19.8	1.0	24.1	24.2	24.2	0.0	23.2	23.2	23.1
			6	0	0.7	18.6	18.6	18.7	2.0	18.6	18.6	18.6	2.0	23.0	23.3	23.1	0.0	23.2	23.2	23.1
			1	0	0.7	18.6	18.8	18.7	2.0	18.7	18.7	18.7	2.0	23.1	23.0	23.2	0.0	23.2	23.1	23.1
			1	3	0.7	18.6	18.5	18.7	2.0	18.6	18.6	18.6	2.0	23.1	23.2	23.2	0.0	23.3	23.2	23.2
			1	5	0.7	18.8	18.7	18.7	2.0	18.8	18.7	18.8	2.0	23.2	23.1	23.2	0.0	23.1	23.0	23.2
			3	0	0.7	18.7	18.7	18.6	2.0	18.7	18.6	18.7	2.0	23.2	23.2	23.2	0.0	23.2	23.1	23.2
			3	1	0.7	18.7	18.5	18.7	2.0	18.6	18.7	18.6	2.0	23.0	23.1	23.2	0.0	23.2	23.1	23.1
			3	3	0.7	18.7	18.7	18.7	2.0	18.6	18.6	18.6	2.0	23.3	23.1	23.2	0.0	23.1	23.3	23.1
			6	0	1.7	17.7	17.5	17.5	3.0	17.6	17.7	17.7	3.0	22.0	22.2	22.1	1.0	22.2	22.1	22.0

LTE Band 26 (Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz
LTE Band 26	Max Power (dBm)				24.0				24.0				24.8				24.8			
	10	QPSK	1	0	0	24.0	24.0	24.0	0	24.0	24.0	24.0	0	24.8	24.8	24.8	0	24.8	24.8	24.8
			1	24	0	24.0	24.0	24.0	0	24.0	24.0	24.0	0	24.8	24.8	24.8	0	24.8	24.8	24.8
			1	49	0	24.0	24.0	24.0	0	24.0	24.0	24.0	0	24.8	24.8	24.8	0	24.8	24.8	24.8
			25	0	1	23.0	23.0	23.0	1	23.0	23.0	23.0	1	23.8	23.8	23.8	1	23.8	23.8	23.8
			25	12	1	23.0	23.0	23.0	1	23.0	23.0	23.0	1	23.8	23.8	23.8	1	23.8	23.8	23.8
			25	24	1	23.0	23.0	23.0	1	23.0	23.0	23.0	1	23.8	23.8	23.8	1	23.8	23.8	23.8
		16QAM	50	0	1	23.0	23.0	23.0	1	23.0	23.0	23.0	1	23.8	23.8	23.8	1	23.8	23.8	23.8
			1	0	1	22.8	22.9	23.0	1	22.8	22.9	23.0	1	23.7	23.7	23.6	1	23.7	23.7	23.6
			1	24	1	22.9	22.9	22.9	1	22.9	22.9	22.9	1	23.6	23.7	23.6	1	23.6	23.7	23.6
			1	49	1	23.0	22.8	22.8	1	23.0	22.8	22.8	1	23.6	23.7	23.6	1	23.6	23.7	23.6
			25	0	2	21.9	21.9	22.0	2	21.9	21.9	22.0	2	22.6	22.7	22.7	2	22.6	22.7	22.7
			25	12	2	21.9	21.8	21.9	2	21.9	21.8	21.9	2	22.8	22.6	22.7	2	22.8	22.6	22.7
		64QAM	25	24	2	21.8	21.8	21.8	2	21.8	21.8	21.8	2	22.7	22.8	22.6	2	22.7	22.8	22.6
			50	0	2	21.9	22.0	21.8	2	21.9	22.0	21.8	2	22.7	22.8	22.8	2	22.7	22.8	22.8
			1	0	2	21.9	21.9	22.0	2	21.9	21.9	22.0	2	22.6	22.7	22.6	2	22.6	22.7	22.6
			1	24	2	22.0	21.9	21.8	2	22.0	21.9	21.8	2	22.7	22.7	22.6	2	22.7	22.7	22.6
			1	49	2	21.8	22.0	21.9	2	21.8	22.0	21.9	2	22.8	22.7	22.7	2	22.8	22.7	22.7
			25	0	3	20.8	20.8	20.8	3	20.8	20.8	20.8	3	21.7	21.8	21.8	3	21.7	21.8	21.8
			25	12	3	20.9	21.0	20.8	3	20.9	21.0	20.8	3	21.6	21.7	21.8	3	21.6	21.7	21.8
			25	24	3	20.9	20.9	20.8	3	20.9	20.9	20.8	3	21.8	21.6	21.8	3	21.8	21.6	21.8
			50	0	3	20.9	20.8	20.9	3	20.9	20.8	20.9	3	21.7	21.8	21.6	3	21.7	21.8	21.6
			1	0	2	21.9	21.9	22.0	2	21.9	21.9	22.0	2	22.6	22.7	22.6	2	22.6	22.7	22.6
			1	24	2	22.0	21.9	21.8	2	22.0	21.9	21.8	2	22.7	22.7	22.6	2	22.7	22.7	22.6
		1	49	2	21.8	22.0	21.9	2	21.8	22.0	21.9	2	22.8	22.7	22.7	2	22.8	22.7	22.7	
		25	0	3	20.8	20.8	20.8	3	20.8	20.8	20.8	3	21.7	21.8	21.8	3	21.7	21.8	21.8	
			25	12	3	20.9	21.0	20.8	3	20.9	21.0	20.8	3	21.6	21.7	21.8	3	21.6	21.7	21.8
25			24	3	20.9	20.9	20.8	3	20.9	20.9	20.8	3	21.8	21.6	21.8	3	21.8	21.6	21.8	
50			0	3	20.9	20.8	20.9	3	20.9	20.8	20.9	3	21.7	21.8	21.6	3	21.7	21.8	21.6	

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz
LTE Band 26	5	QPSK	1	0	0	24.0	23.9	24.0	0	24.0	23.9	24.0	0	24.6	24.7	24.8	0	24.6	24.7	24.8
			1	12	0	23.9	23.8	23.9	0	23.9	23.8	23.9	0	24.8	24.7	24.7	0	24.8	24.7	24.7
			1	24	0	23.9	23.8	23.8	0	23.9	23.8	23.8	0	24.7	24.6	24.8	0	24.7	24.6	24.8
			12	0	1	22.9	22.9	22.8	1	22.9	22.9	22.8	1	23.7	23.6	23.8	1	23.7	23.6	23.8
			12	7	1	22.8	22.9	22.9	1	22.8	22.9	22.9	1	23.7	23.8	23.8	1	23.7	23.8	23.8
			12	13	1	22.8	23.0	22.9	1	22.8	23.0	22.9	1	23.7	23.6	23.7	1	23.7	23.6	23.7
		16QAM	25	0	1	22.9	22.9	23.0	1	22.9	22.9	23.0	1	23.8	23.8	23.6	1	23.8	23.8	23.6
			1	0	1	22.8	23.0	22.9	1	22.8	23.0	22.9	1	23.7	23.8	23.7	1	23.7	23.8	23.7
			1	12	1	22.8	22.8	23.0	1	22.8	22.8	23.0	1	23.6	23.7	23.6	1	23.6	23.7	23.6
			1	24	1	22.8	23.0	22.8	1	22.8	23.0	22.8	1	23.7	23.8	23.6	1	23.7	23.8	23.6
			12	0	2	21.9	21.8	21.9	2	21.9	21.8	21.9	2	22.6	22.7	22.6	2	22.6	22.7	22.6
			12	7	2	21.9	21.9	21.8	2	21.9	21.9	21.8	2	22.7	22.8	22.7	2	22.7	22.8	22.7
		64QAM	12	13	2	21.8	21.8	22.0	2	21.8	21.8	22.0	2	22.8	22.7	22.7	2	22.8	22.7	22.7
			25	0	2	21.8	21.9	21.9	2	21.8	21.9	21.9	2	22.8	22.6	22.7	2	22.8	22.6	22.7
			1	0	2	21.9	21.8	22.0	2	21.9	21.8	22.0	2	22.7	22.6	22.8	2	22.7	22.6	22.8
			1	12	2	21.8	21.9	21.9	2	21.8	21.9	21.9	2	22.6	22.6	22.6	2	22.6	22.6	22.6
			1	24	2	22.0	22.0	21.9	2	22.0	22.0	21.9	2	22.7	22.6	22.7	2	22.7	22.6	22.7
			12	0	3	20.9	21.0	21.0	3	20.9	21.0	21.0	3	21.8	21.8	21.7	3	21.8	21.8	21.7
		64QAM	12	7	3	20.8	21.0	20.8	3	20.8	21.0	20.8	3	21.7	21.7	21.7	3	21.7	21.7	21.7
			12	13	3	20.9	21.0	20.8	3	20.9	21.0	20.8	3	21.6	21.6	21.7	3	21.6	21.6	21.7
			25	0	3	21.0	20.9	20.9	3	21.0	20.9	20.9	3	21.8	21.8	21.8	3	21.8	21.8	21.8

LTE Band 26 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1			
						815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz	
LTE Band 26	3	QPSK	1	0	0	24.0	24.0	23.9	0	24.0	24.0	23.9	0	24.8	24.6	24.6	0	24.8	24.6	24.6	
			1	8	0	23.9	24.0	23.8	0	23.9	24.0	23.8	0	24.8	24.8	24.7	0	24.8	24.8	24.7	
			1	14	0	23.9	23.8	23.9	0	23.9	23.8	23.9	0	24.7	24.8	24.7	0	24.7	24.8	24.7	
			8	0	1	22.9	22.8	22.9	1	22.9	22.8	22.9	1	23.7	23.8	23.8	1	23.7	23.8	23.8	
			8	4	1	23.0	22.8	22.9	1	23.0	22.8	22.9	1	23.7	23.8	23.6	1	23.7	23.8	23.6	
			8	7	1	23.0	22.9	22.8	1	23.0	22.9	22.8	1	23.7	23.7	23.6	1	23.7	23.7	23.6	
		16QAM	15	0	1	23.0	22.8	22.8	1	23.0	22.8	22.8	1	23.6	23.8	23.8	1	23.6	23.8	23.8	
			1	0	1	23.0	22.9	23.0	1	23.0	22.9	23.0	1	23.7	23.6	23.7	1	23.7	23.6	23.7	
			1	8	1	22.9	23.0	23.0	1	22.9	23.0	23.0	1	23.6	23.8	23.7	1	23.6	23.8	23.7	
			1	14	1	22.9	22.8	22.9	1	22.9	22.8	22.9	1	23.8	23.6	23.6	1	23.8	23.6	23.6	
			8	0	2	22.0	21.9	21.9	2	22.0	21.9	21.9	2	22.8	22.8	22.7	2	22.8	22.8	22.7	
			8	4	2	22.0	21.8	22.0	2	22.0	21.8	22.0	2	22.8	22.8	22.8	2	22.8	22.8	22.8	
		64QAM	8	7	2	21.9	21.9	21.9	2	21.9	21.9	21.9	2	22.7	22.6	22.6	2	22.7	22.6	22.6	
			15	0	2	21.8	22.0	21.9	2	21.8	22.0	21.9	2	22.8	22.8	22.7	2	22.8	22.8	22.7	
			1	0	2	22.0	21.8	22.0	2	22.0	21.8	22.0	2	22.7	22.6	22.7	2	22.7	22.6	22.7	
			1	8	2	21.9	21.8	21.8	2	21.9	21.8	21.8	2	22.7	22.8	22.8	2	22.7	22.8	22.8	
			1	14	2	22.0	21.8	22.0	2	22.0	21.8	22.0	2	22.8	22.7	22.6	2	22.8	22.7	22.6	
			8	0	3	20.8	20.8	20.8	3	20.8	20.8	20.8	3	21.8	21.6	21.8	3	21.8	21.6	21.8	
	8	4	3	20.9	20.9	21.0	3	20.9	20.9	21.0	3	21.8	21.8	21.6	3	21.8	21.8	21.6			
	8	7	3	21.0	21.0	20.9	3	21.0	21.0	20.9	3	21.8	21.8	21.7	3	21.8	21.8	21.7			
	15	0	3	20.9	21.0	20.8	3	20.9	21.0	20.8	3	21.8	21.8	21.7	3	21.8	21.8	21.7			
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
						Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
814.7 MHz							831.5 MHz	848.3 MHz	814.7 MHz		831.5 MHz	848.3 MHz	814.7 MHz		831.5 MHz	848.3 MHz	814.7 MHz		831.5 MHz	848.3 MHz	
LTE Band 26	1.4	QPSK	1	0	0	23.9	23.9	23.9	0	23.9	23.9	23.9	0	24.8	24.6	24.6	0	24.8	24.6	24.6	
			1	3	0	23.9	23.9	24.0	0	23.9	23.9	24.0	0	24.8	24.6	24.7	0	24.8	24.6	24.7	
			1	5	0	23.9	23.8	23.9	0	23.9	23.8	23.9	0	24.7	24.7	24.8	0	24.7	24.7	24.8	
			3	0	0	23.9	23.8	24.0	0	23.9	23.8	24.0	0	24.6	24.6	24.8	0	24.6	24.6	24.8	
			3	1	0	23.8	23.8	23.9	0	23.8	23.8	23.9	0	24.8	24.8	24.7	0	24.8	24.8	24.7	
			3	3	0	24.0	23.8	24.0	0	24.0	23.8	24.0	0	24.7	24.8	24.7	0	24.7	24.8	24.7	
		16QAM	6	0	1	23.0	22.9	22.8	1	23.0	22.9	22.8	1	23.7	23.8	23.8	1	23.7	23.8	23.8	
			1	0	1	23.0	22.8	23.0	1	23.0	22.8	23.0	1	23.7	23.7	23.6	1	23.7	23.7	23.6	
			1	3	1	22.9	22.8	22.8	1	22.9	22.8	22.8	1	23.8	23.8	23.8	1	23.8	23.8	23.8	
			1	5	1	22.9	22.9	22.9	1	22.9	22.9	22.9	1	23.8	23.6	23.7	1	23.8	23.6	23.7	
			3	0	1	22.8	22.8	22.8	1	22.8	22.8	22.8	1	23.7	23.7	23.8	1	23.7	23.7	23.8	
			3	1	1	22.8	23.0	23.0	1	22.8	23.0	23.0	1	23.8	23.6	23.6	1	23.8	23.6	23.6	
		64QAM	3	3	1	23.0	22.8	22.8	1	23.0	22.8	22.8	1	23.6	23.7	23.8	1	23.6	23.7	23.8	
			6	0	2	21.8	21.8	22.0	2	21.8	21.8	22.0	2	22.8	22.7	22.6	2	22.8	22.7	22.6	
			1	0	2	21.8	22.0	21.8	2	21.8	22.0	21.8	2	22.8	22.7	22.6	2	22.8	22.7	22.6	
			1	3	2	21.8	21.8	21.8	2	21.8	21.8	21.8	2	22.6	22.6	22.7	2	22.6	22.6	22.7	
			1	5	2	21.9	21.9	22.0	2	21.9	21.9	22.0	2	22.8	22.6	22.6	2	22.8	22.6	22.6	
			3	0	2	22.0	21.8	22.0	2	22.0	21.8	22.0	2	22.6	22.6	22.8	2	22.6	22.6	22.8	
	3	1	2	22.0	21.8	22.0	2	22.0	21.8	22.0	2	22.7	22.7	22.7	2	22.7	22.7	22.7			
	3	3	2	21.9	22.0	22.0	2	21.9	22.0	22.0	2	22.7	22.7	22.8	2	22.7	22.7	22.8			
	6	0	3	21.0	20.8	21.0	3	21.0	20.8	21.0	3	21.7	21.6	21.7	3	21.7	21.6	21.7			

LTE Band 30 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B										
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1						
							2310 MHz			2310 MHz			2310 MHz			2310 MHz		2310 MHz			
LTE Band 30	Max Power (dBm)					20.0			20.0			23.8			22.0						
	QPSK	1	0	0		20.0		0.0		20.0		0		23.8		0.0		219			
		1	24	0		20.0		0.0		20.0		0		23.8		0.0		22.0			
		1	49	0		20.0		0.0		20.0		0		23.8		0.0		22.0			
		25	0	0		20.0		0.0		20.0		1		22.8		0.0		22.0			
		25	12	0		20.0		0.0		20.0		1		22.8		0.0		219			
		25	24	0		20.0		0.0		20.0		1		22.8		0.0		22.0			
		50	0	0		20.0		0.0		20.0		1		22.8		0.0		22.0			
		1	0	0		20.0		0.0		20.0		1		22.8		0.0		22.0			
		1	24	0		19.9		0.0		20.0		1		22.8		0.0		22.0			
		1	49	0		20.0		0.0		20.0		1		22.7		0.0		219			
	16QAM	25	0	1		19.3		0.7		19.3		2		21.6		0.2		218			
		25	12	1		19.3		0.7		19.2		2		21.7		0.2		217			
		25	24	1		19.2		0.7		19.3		2		21.7		0.2		218			
		50	0	1		19.2		0.7		19.3		2		21.8		0.2		218			
		64QAM	1	0	1		19.3		0.7		19.3		2		21.7		0.2		218		
	1		24	1		19.2		0.7		19.3		2		21.8		0.2		217			
	1		49	1		19.3		0.7		19.3		2		21.8		0.2		218			
	25		0	2		19.2		1.7		19.3		3		20.8		1.2		20.8			
	25		12	2		19.3		1.7		19.2		3		20.7		1.2		20.8			
	25		24	2		19.3		1.7		19.3		3		20.7		1.2		20.7			
	50		0	2		19.2		1.7		19.3		3		20.8		1.2		20.8			
Band	BW (MHz)		Mode	RB Allocation	RB offset	MODE A						MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1			
							2310 MHz				2310 MHz				2310 MHz				2310 MHz		
LTE Band 30	QPSK	1	0	0			19.9		0.0			19.9		0.0			23.7		0.0		219
		1	12	0			20.0		0.0			20.0		0.0			23.8		0.0		22.0
		1	24	0			20.0		0.0			20.0		0.0			23.8		0.0		22.0
		12	0	0			20.0		0.0			20.0		10			22.7		0.0		22.0
		12	7	0			19.9		0.0			20.0		10			22.7		0.0		219
		12	13	0			20.0		0.0			19.9		10			22.8		0.0		22.0
		25	0	0			20.0		0.0			20.0		10			22.8		0.0		22.0
		1	0	0			19.9		0.0			20.0		10			22.8		0.0		22.0
		1	12	0			20.0		0.0			20.0		10			22.8		0.0		22.0
		1	24	0			20.0		0.0			20.0		10			22.7		0.0		219
	16QAM	12	0	1			19.2		0.7			19.3		2.0			21.7		0.2		218
		12	7	1			19.2		0.7			19.2		2.0			21.7		0.2		217
		12	13	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		25	0	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		1	0	1			19.3		0.7			19.3		2.0			21.7		0.2		217
	64QAM	1	12	1			19.2		0.7			19.3		2.0			21.8		0.2		217
		1	24	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		12	0	2			19.3		1.7			19.3		3.0			20.8		1.2		20.7
		12	7	2			19.2		1.7			19.2		3.0			20.8		1.2		20.8
		12	13	2			19.3		1.7			19.3		3.0			20.7		1.2		20.8
		25	0	2			19.2		1.7			19.3		3.0			20.8		1.2		20.7
		Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B								
						Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
							2310 MHz				2310 MHz				2310 MHz				2310 MHz		
LTE Band 30	QPSK	1	0	0			19.9		0.0			19.9		0.0			23.7		0.0		219
		1	12	0			20.0		0.0			20.0		0.0			23.8		0.0		22.0
		1	24	0			20.0		0.0			20.0		0.0			23.8		0.0		22.0
		12	0	0			20.0		0.0			20.0		10			22.7		0.0		22.0
		12	7	0			19.9		0.0			20.0		10			22.7		0.0		219
		12	13	0			20.0		0.0			19.9		10			22.8		0.0		22.0
		25	0	0			20.0		0.0			20.0		10			22.8		0.0		22.0
		1	0	0			19.9		0.0			20.0		10			22.8		0.0		22.0
		1	12	0			20.0		0.0			20.0		10			22.8		0.0		22.0
		1	24	0			20.0		0.0			20.0		10			22.7		0.0		219
	16QAM	12	0	1			19.2		0.7			19.3		2.0			21.7		0.2		218
		12	7	1			19.2		0.7			19.2		2.0			21.7		0.2		217
		12	13	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		25	0	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		1	0	1			19.3		0.7			19.3		2.0			21.7		0.2		217
	64QAM	1	12	1			19.2		0.7			19.3		2.0			21.8		0.2		217
		1	24	1			19.3		0.7			19.3		2.0			21.8		0.2		217
		12	0	2			19.3		1.7			19.3		3.0			20.8		1.2		20.7
12		7	2			19.2		1.7			19.2		3.0			20.8		1.2		20.8	
12		13	2			19.3		1.7			19.3		3.0			20.7		1.2		20.8	
25		0	2			19.2		1.7			19.3		3.0			20.8		1.2		20.7	

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 66 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1			
						1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz	
LTE Band 66	Max Power (dBm)					21.8				22.2				25.3				24.5			
	20	QPSK	1	0	0	218	218	216	0.0	22.2	22.2	22.2	0.0	25.2	25.3	25.3	0.0	24.5	24.5	24.5	
			1	49	0	218	218	216	0.0	22.2	22.2	22.2	0.0	25.3	25.3	25.2	0.0	24.5	24.5	24.5	
			1	99	0	218	218	216	0.0	22.1	22.2	22.2	0.0	25.3	25.3	25.2	0.0	24.5	24.5	24.5	
			50	0	0.6	212	212	211	10	212	212	211	10	24.3	24.3	24.2	0.2	24.2	24.2	24.2	
			50	24	0.6	212	212	211	10	212	212	211	10	24.3	24.3	24.3	0.2	24.2	24.2	24.2	
			50	49	0.6	212	212	212	10	212	212	212	10	24.3	24.3	24.2	0.2	24.1	24.2	24.2	
		100	0	0.6	211	212	212	10	212	212	211	10	24.3	24.3	24.2	0.2	24.2	24.2	24.1		
		16QAM	1	0	0.6	212	212	211	10	211	212	212	10	24.3	24.3	24.3	0.2	24.2	24.2	24.1	
			1	49	0.6	212	212	212	10	212	212	212	10	24.3	24.2	24.2	0.2	24.2	24.2	24.2	
			1	99	0.6	212	212	212	10	211	212	212	10	24.3	24.3	24.2	0.2	24.1	24.2	24.2	
			50	0	16	19.2	19.1	19.1	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3	12	23.2	23.1	23.2	
			50	24	16	19.2	19.2	19.2	2.0	20.1	20.2	20.2	2.0	23.3	23.2	23.2	12	23.1	23.2	23.2	
			50	49	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3	12	23.2	23.2	23.1	
		64QAM	100	0	16	19.1	19.2	19.2	2.0	20.1	20.1	20.2	2.0	23.3	23.3	23.3	12	23.1	23.2	23.1	
			1	0	16	19.1	19.1	19.2	2.0	20.2	20.1	20.2	2.0	23.3	23.3	23.3	12	23.2	23.2	23.2	
			1	49	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.2	23.2	23.2	12	23.1	23.2	23.2	
			1	99	16	19.1	19.2	19.2	2.0	20.1	20.2	20.2	2.0	23.3	23.2	23.3	12	23.2	23.2	23.1	
			50	0	2.6	18.2	18.2	18.2	3.0	19.2	19.2	19.2	3.0	22.3	22.2	22.3	2.2	22.2	22.2	22.1	
	50		24	2.6	18.2	18.2	18.2	3.0	19.1	19.2	19.2	3.0	22.3	22.2	22.2	2.2	22.2	22.1	22.2		
	50	49	2.6	18.1	18.1	18.2	3.0	19.1	19.2	19.2	3.0	22.3	22.3	22.2	2.2	22.2	22.1	22.2			
	100	0	2.6	18.2	18.1	18.2	3.0	19.2	19.2	19.2	3.0	22.2	22.3	22.3	2.2	22.1	22.2	22.2			
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
						Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz	
LTE Band 66	15	QPSK	1	0	0.0	217	218	218	0.0	22.2	22.2	22.2	0.0	25.3	25.2	25.3	0.0	24.4	24.5	24.5	
			1	36	0.0	218	218	216	0.0	22.0	22.2	22.2	0.0	25.2	25.3	25.2	0.0	24.5	24.5	24.5	
			1	74	0.0	218	218	217	0.0	22.2	22.1	22.2	0.0	25.2	25.3	25.3	0.0	24.5	24.5	24.5	
			36	0	0.6	212	212	211	10	211	212	212	10	24.2	24.3	24.2	0.2	24.1	24.2	24.2	
			36	18	0.6	212	212	211	10	211	212	212	10	24.3	24.3	24.3	0.2	24.2	24.2	24.2	
			36	37	0.6	212	212	212	10	212	212	212	10	24.2	24.3	24.3	0.2	24.2	24.1	24.2	
		16QAM	75	0	0.6	211	212	212	10	211	212	212	10	24.2	24.3	24.2	0.2	24.1	24.2	24.2	
			1	0	0.6	212	212	211	10	212	211	212	10	24.3	24.3	24.3	0.2	24.1	24.2	24.2	
			1	36	0.6	212	212	212	10	212	212	212	10	24.2	24.3	24.2	0.2	24.2	24.2	24.2	
			1	74	0.6	212	212	212	10	212	211	212	10	24.2	24.3	24.3	0.2	24.2	24.1	24.2	
			36	0	16	19.2	19.1	19.1	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.2	12	23.2	23.2	23.1	
			36	18	16	19.2	19.2	19.2	2.0	20.2	20.1	20.2	2.0	23.2	23.3	23.2	12	23.2	23.1	23.2	
		64QAM	36	37	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3	12	23.1	23.2	23.2	
			75	0	16	19.1	19.2	19.2	2.0	20.2	20.1	20.1	2.0	23.3	23.3	23.3	12	23.1	23.1	23.2	
			1	0	16	19.1	19.1	19.2	2.0	20.2	20.2	20.1	2.0	23.3	23.3	23.2	12	23.2	23.2	23.2	
			1	36	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.2	23.2	23.2	12	23.2	23.1	23.2	
			1	74	16	19.1	19.2	19.2	2.0	20.2	20.1	20.2	2.0	23.3	23.3	23.3	12	23.1	23.2	23.2	
			36	0	2.6	18.2	18.2	18.2	3.0	19.2	19.2	19.2	3.0	22.3	22.3	22.3	2.2	22.1	22.2	22.2	
		64QAM	36	18	2.6	18.2	18.2	18.2	3.0	19.2	19.1	19.2	3.0	22.2	22.3	22.2	2.2	22.2	22.2	22.1	
			36	37	2.6	18.1	18.1	18.2	3.0	19.2	19.1	19.2	3.0	22.2	22.3	22.2	2.2	22.2	22.2	22.1	
			75	0	2.6	18.2	18.1	18.2	3.0	19.2	19.2	19.2	3.0	22.3	22.2	22.2	2.2	22.2	22.1	22.2	


LTE Band 66 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B					
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1		
						1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz
LTE Band 66	10	QPSK	1	0	0	218	218	218	0.0	22.2	22.2	22.2	0.0	25.3	25.3	25.2
			1	24	0	216	216	218	0.0	22.2	22.0	22.2	0.0	25.2	25.3	25.3
			1	49	0	217	217	218	0.0	22.2	22.2	22.1	0.0	25.2	25.3	25.3
			25	0	0.6	211	211	212	10	212	211	212	10	24.2	24.3	24.3
			25	12	0.6	211	211	212	10	212	211	212	10	24.3	24.3	24.3
			25	24	0.6	212	212	212	10	212	212	212	10	24.2	24.2	24.3
		16QAM	50	0	0.6	212	212	212	10	212	211	212	10	24.2	24.3	24.3
			1	0	0.6	211	211	212	10	212	212	211	10	24.3	24.3	24.3
			1	24	0.6	212	212	212	10	212	212	212	10	24.2	24.2	24.3
			1	49	0.6	212	212	212	10	212	212	211	10	24.2	24.3	24.2
			25	0	16	19.1	19.1	19.1	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3
			25	12	16	19.2	19.2	19.2	2.0	20.2	20.2	20.1	2.0	23.2	23.2	23.2
		64QAM	25	24	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3
			50	0	16	19.2	19.2	19.2	2.0	20.1	20.2	20.1	2.0	23.3	23.3	23.3
			1	0	16	19.2	19.2	19.1	2.0	20.1	20.2	20.2	2.0	23.3	23.3	23.2
			1	24	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.2	23.2	22.3
			1	49	16	19.2	19.2	19.2	2.0	20.2	20.2	20.1	2.0	23.3	23.2	22.2
			25	0	2.6	18.2	18.2	18.2	3.0	19.2	19.2	19.2	3.0	22.3	22.2	22.3
			25	12	2.6	18.2	18.2	18.2	3.0	19.2	19.2	19.1	3.0	22.2	22.2	22.3
			25	24	2.6	18.2	18.2	18.1	3.0	19.2	19.2	19.1	3.0	22.2	22.3	22.3
			50	0	2.6	18.2	18.2	18.1	3.0	19.2	19.2	19.2	3.0	22.3	22.3	22.2
LTE Band 66	5	QPSK	1	0	0.0	218	218	218	0.0	22.2	22.2	22.2	0.0	25.3	25.2	25.3
			1	12	0.0	216	216	216	0.0	22.0	22.2	22.2	0.0	25.3	25.3	25.2
			1	24	0.0	217	217	217	0.0	22.2	22.1	22.2	0.0	25.3	25.3	25.2
			12	0	0.6	211	211	211	10	211	212	212	10	24.3	24.3	24.2
			12	7	0.6	211	211	211	10	211	212	212	10	24.3	24.3	24.3
			12	13	0.6	212	212	212	10	212	212	212	10	24.2	24.3	24.2
		16QAM	25	0	0.6	212	212	212	10	211	212	212	10	24.3	24.3	24.2
			1	0	0.6	211	211	211	10	212	211	212	10	24.3	24.3	24.3
			1	12	0.6	212	212	212	10	212	212	212	10	24.2	24.3	24.2
			1	24	0.6	212	212	212	10	212	211	212	10	24.3	24.3	24.2
			12	0	16	19.1	19.1	19.1	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3
			12	7	16	19.2	19.2	19.2	2.0	20.2	20.1	20.2	2.0	23.2	23.3	23.2
		64QAM	12	13	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.3	23.3	23.3
			25	0	16	19.2	19.2	19.2	2.0	20.2	20.1	20.1	2.0	23.3	23.3	23.3
			1	0	16	19.2	19.2	19.2	2.0	20.2	20.2	20.1	2.0	23.3	23.3	23.3
			1	12	16	19.2	19.2	19.2	2.0	20.2	20.2	20.2	2.0	23.2	23.2	23.2
			1	24	16	19.2	19.2	19.2	2.0	20.2	20.1	20.2	2.0	23.2	23.3	23.3
			12	0	2.6	18.2	18.2	18.2	3.0	19.2	19.2	19.2	3.0	22.2	22.3	22.3
			12	7	2.6	18.2	18.2	18.2	3.0	19.2	19.1	19.1	3.0	22.2	22.3	22.2
			12	13	2.6	18.2	18.2	18.2	3.0	19.2	19.1	19.2	3.0	22.3	22.3	22.2
			25	0	2.6	18.2	18.2	18.2	3.0	19.2	19.1	19.1	3.0	22.3	22.2	22.3


LTE Band 41 Measured Results**Procedure used to establish SAR test signal for LTE TDD Band 41**

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config....”

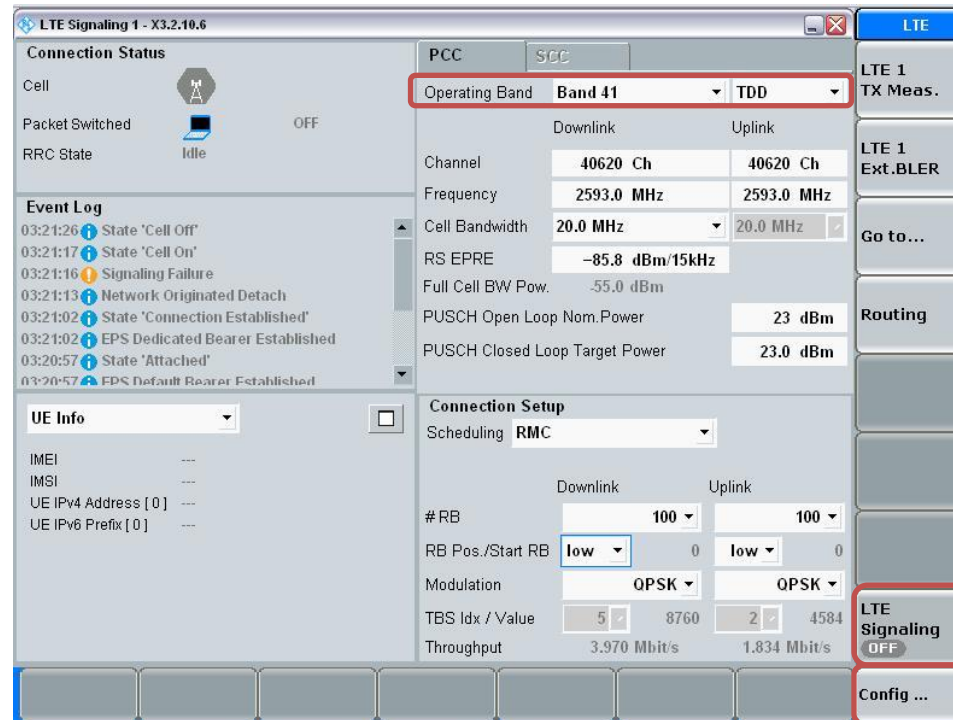


- Go to “Physical Cell Setup”
- Select “TDD” and Set “Uplink Downlink Configuration” to “0”
- Turn the cell on using “ON | OFF” key

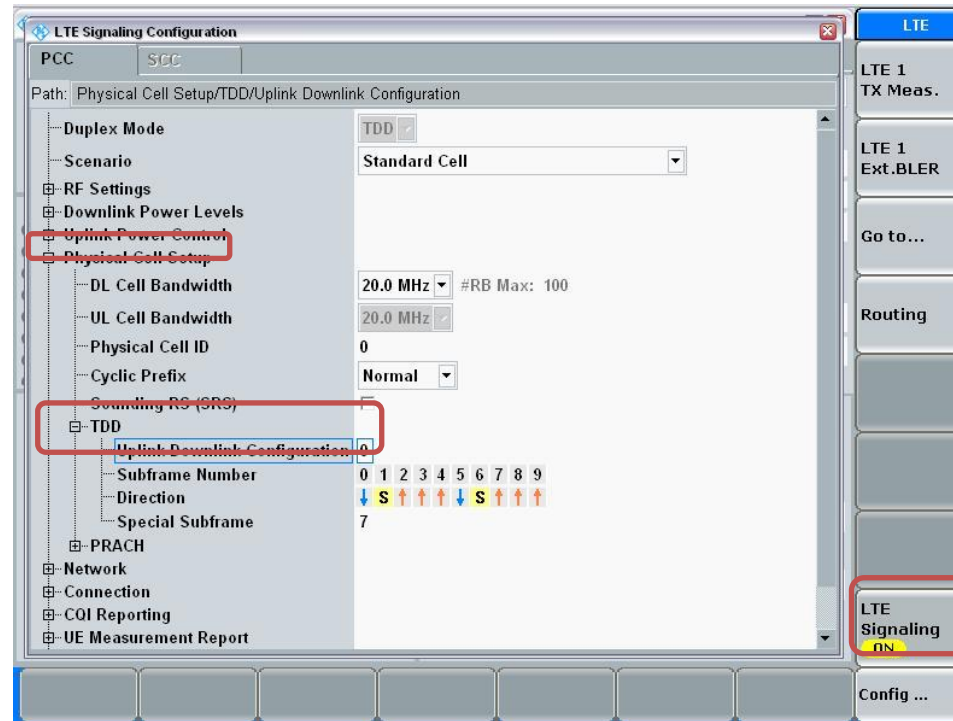

Connect to EUT

- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

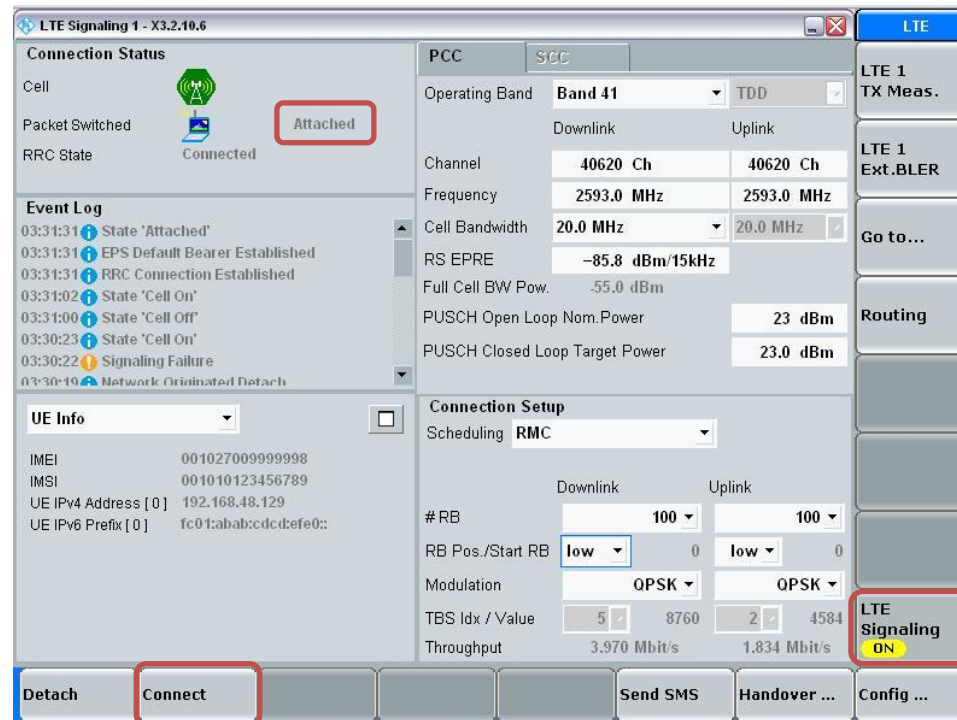

Max Power Setting

- Select "LTE 1 TX Meas."
- Press "RESTART | STOP" Soft key

LTE Signaling 1 - X3.2.10.6

Connection Status

Cell: Connection Established

Packet Switched: Connected

RRC State: Connected

Event Log

- 03:33:07 State 'Connection Established'
- 03:33:07 EPS Dedicated Bearer Established
- 03:31:31 State 'Attached'
- 03:31:31 EPS Default Bearer Established
- 03:31:31 RRC Connection Established
- 03:31:02 State 'Cell On'
- 03:31:00 State 'Cell Off'
- 03:30:23 State 'Cell On'

UE Info

IMEI: 00102700999998

IMSI: 001010123456789

UE IPv4 Address [0]: 192.168.48.129

UE IPv6 Prefix [0]: fc01:abab:cdcd:efe0::

Connection Setup


Scheduling: **RMC**

	Downlink	Uplink
Operating Band	Band 41	TDD
Channel	40620 Ch	40620 Ch
Frequency	2593.0 MHz	2593.0 MHz
Cell Bandwidth	20.0 MHz	20.0 MHz
RS EPRE	-85.8 dBm/15kHz	
Full Cell BW Pow.	-55.0 dBm	
PUSCH Open Loop Nom.Power		23 dBm
PUSCH Closed Loop Target Power		23.0 dBm
# RB	100	100
RB Pos./Start RB	low	low
Modulation	QPSK	QPSK
TBS Idx / Value	5 / 8760	2 / 4584
Throughput	3.970 Mbit/s	1.834 Mbit/s

Buttons: Detach, Disconnect, Send SMS, Handover ..., Config ...

Right Panel: LTE, LTE 1 TX Meas., LTE 1 Ext.BLER, Go to..., Routing, LTE Signaling ON

- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

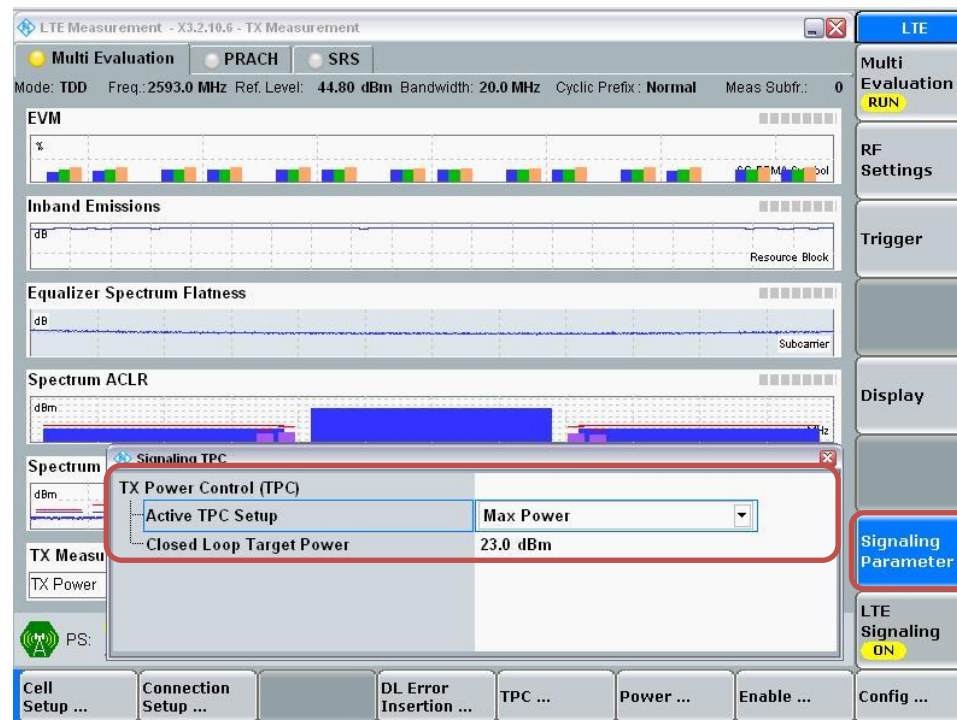

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”



LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B																													
					Target MPR	UAT 1				Target MPR	LAT 1				Target MPR	UAT 1				Target MPR	LAT 1																							
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz		2680 MHz	2506 MHz	2549.5 MHz	2593 MHz		2636.5 MHz	2680 MHz	2506 MHz	2549.5 MHz		2593 MHz	2636.5 MHz	2680 MHz	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz																
LTE Band 41	Max Power (dBm)				21.3										21.4										25.3										23.3									
	20	QPSK	1	0	0.0	21.2	21.2	21.2	21.3	21.3	0.0	21.4	21.4	21.4	21.4	21.4	0.0	25.0	25.0	25.3	25.1	25.0	0.0	23.3	23.3	23.3	23.3	23.2																
			1	49	0.0	21.2	21.2	21.2	21.3	21.3	0.0	21.4	21.4	21.4	21.4	21.4	0.0	25.1	25.0	25.3	25.1	25.1	0.0	23.3	23.2	23.3	23.3	23.3																
			1	99	0.0	21.2	21.2	21.2	21.3	21.3	0.0	21.4	21.4	21.4	21.4	21.4	0.0	25.1	25.0	25.3	25.1	25.1	0.0	23.3	23.3	23.3	23.3	23.3																
			50	0	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.3	24.2	24.3	24.3	24.2	0.0	23.3	23.2	23.3	23.3	23.3																
			50	24	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.2	24.2	24.3	24.2	24.3	0.0	23.3	23.3	23.3	23.3	23.3																
			50	49	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.3	24.3	24.3	24.3	24.3	0.0	23.2	23.3	23.3	23.3	23.2																
		100	0	0.9	20.3	20.3	20.3	20.4	20.3	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.3	24.2	24.3	24.3	24.2	0.0	23.3	23.2	23.3	23.3	23.2																	
		16QAM	1	0	0.9	20.3	20.3	20.4	20.3	20.4	1.0	20.3	20.3	20.4	20.3	20.4	1.0	24.2	24.2	24.3	24.2	24.2	0.0	23.3	23.3	23.3	23.3	23.3																
			1	49	0.9	20.4	20.3	20.3	20.4	20.3	1.0	20.4	20.4	20.4	20.3	20.4	1.0	24.2	24.3	24.2	24.3	24.3	0.0	23.2	23.3	23.3	23.3	23.3																
			1	99	0.9	20.3	20.4	20.4	20.4	20.3	1.0	20.3	20.3	20.3	20.4	20.3	1.0	24.3	24.2	24.2	24.3	24.3	0.0	23.3	23.2	23.3	23.2	23.2																
			50	0	1.9	19.3	19.4	19.4	19.3	19.3	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.3	23.3	23.3																
			50	24	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.2	23.3	23.2	23.3	23.3	0.0	23.3	23.3	23.3	23.2	23.2																
			50	49	1.9	19.3	19.3	19.4	19.3	19.3	2.0	19.4	19.4	19.4	19.4	19.3	2.0	23.2	23.2	23.2	23.2	23.3	0.0	23.3	23.3	23.3	23.3	23.2																
		100	0	1.9	19.4	19.3	19.4	19.3	19.4	2.0	19.4	19.4	19.4	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.2	23.3	23.3	23.2																	
		64QAM	1	0	1.9	19.4	19.3	19.4	19.4	19.3	2.0	19.3	19.3	19.4	19.3	19.4	2.0	23.3	23.3	23.3	22.2	23.3	0.0	23.2	23.3	23.2	23.2	23.3																
			1	49	1.9	19.4	19.3	19.4	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.2	23.2	23.3	23.2	23.3	0.0	23.2	23.2	23.3	23.3	23.2																
	1		99	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.4	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.3	23.2	23.3																	
	50		0	2.9	18.4	18.4	18.3	18.4	18.4	3.0	18.3	18.4	18.3	18.3	18.4	3.0	22.3	22.3	22.3	22.3	22.3	1.0	22.3	22.3	22.2	22.3	22.2																	
	50		24	2.9	18.4	18.3	18.4	18.3	18.4	3.0	18.4	18.3	18.4	18.3	18.4	3.0	22.2	22.2	22.2	22.2	22.2	1.0	22.3	22.3	22.3	22.1	22.3																	
	50		49	2.9	18.4	18.3	18.4	18.3	18.4	3.0	18.4	18.4	18.3	18.3	18.4	3.0	22.3	22.3	22.3	22.2	22.3	1.0	22.2	22.3	22.2	22.3	22.2																	
	100	0	2.9	18.4	18.4	18.4	18.3	18.4	3.0	18.3	18.4	18.3	18.3	18.3	3.0	22.3	22.3	22.3	22.3	22.2	1.0	22.3	22.2	22.3	22.3	22.3																		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B																													
					Target MPR	UAT 1				Target MPR	LAT 1				Target MPR	UAT 1				Target MPR	LAT 1																							
2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz		2680 MHz	2506 MHz	2549.5 MHz	2593 MHz		2636.5 MHz	2680 MHz	2506 MHz	2549.5 MHz		2593 MHz	2636.5 MHz	2680 MHz																					
LTE Band 41	15	QPSK	1	0	0.0	21.2	21.2	21.2	21.3	21.2	0.0	21.3	21.3	21.2	21.3	21.3	0.0	25.0	25.0	25.1	25.0	25.0	0.0	23.2	23.3	23.3	23.2	23.3																
			1	36	0.0	21.2	21.3	21.3	21.3	21.3	0.0	21.2	21.2	21.3	21.2	21.3	0.0	25.0	25.0	25.1	25.1	25.1	0.0	23.3	23.3	23.2	23.3	23.3																
			1	74	0.0	21.2	21.2	21.3	21.3	21.3	0.0	21.3	21.3	21.3	21.3	21.2	0.0	25.0	25.0	25.1	25.1	25.1	0.0	23.3	23.3	23.3	23.3	23.3																
			36	0	0.9	20.3	20.3	20.4	20.4	20.3	1.0	20.3	20.3	20.4	20.3	20.4	1.0	24.2	24.2	24.3	24.2	24.2	0.0	23.2	23.3	23.2	23.3	23.3																
			36	18	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.2	20.3	20.4	20.2	20.3	1.0	24.2	24.2	24.2	24.3	24.3	0.0	23.3	23.3	23.3	23.3	23.3																
			36	37	0.9	20.3	20.4	20.3	20.4	20.3	1.0	20.3	20.4	20.3	20.4	20.3	1.0	24.3	24.3	24.3	24.3	24.3	0.0	23.3	23.3	23.3	23.2	23.2																
			75	0	0.9	20.3	20.3	20.4	20.3	20.3	1.0	20.3	20.4	20.4	20.3	20.4	1.0	24.2	24.2	24.3	24.2	24.2	0.0	23.3	23.3	23.2	23.2	23.3																
			1	0	0.9	20.3	20.3	20.4	20.3	20.4	1.0	20.3	20.3	20.3	20.3	20.4	1.0	24.2	24.2	24.2	24.2	24.2	0.0	23.3	23.3	23.3	23.3	23.3																
		1	36	0.9	20.4	20.3	20.3	20.4	20.4	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.3	24.3	24.3	24.3	24.3	0.0	23.3	23.3	23.3	23.3	23.2																	
		1	74	0.9	20.3	20.4	20.4	20.4	20.3	1.0	20.3	20.3	20.4	20.3	20.3	1.0	24.2	24.2	24.3	24.3	24.3	0.0	23.3	23.2	23.2	23.2	23.3																	
		36	0	1.9	19.3	19.4	19.4	19.3	19.3	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.3	23.3	23.3																	
		36	18	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.3	19.3	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.2	23.3	23.2	23.3																	
		36	37	1.9	19.3	19.3	19.4	19.3	19.3	2.0	19.4	19.4	19.4	19.4	19.3	2.0	23.2	23.2	23.2	23.3	23.3	0.0	23.3	23.3	23.3	23.2	23.3																	
		75	0	1.9	19.4	19.3	19.4	19.3	19.4	2.0	19.4	19.4	19.3	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.2	23.2	23.3																	
		64QAM	1	0	1.9	19.3	19.4	19.4	19.3	19.4	2.0	19.3	19.3	19.3	19.4	19.4	2.0	23.3	23.3	22.2	23.3	23.3	0.0	23.2	23.2	23.3	23.3	23.2																
			1	36	1.9	19.3	19.3	19.4	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.3	23.2	23.2	23.3	23.3	0.0	23.3	23.3	23.2	23.2	23.2																
	1		74	1.9	19.4	19.3	19.3	19.3	19.4	2.0	19.4	19.3	19.3	19.4	19.4	2.0	23.3	23.3	23.3	23.2	23.3	0.0	23.3	23.2	23.3	23.3	23.3																	
	36		0	2.9	18.4	18.3	18.3	18.4	18.4	3.0	18.3	18.4	18.3	18.3	18.4	3.0	22.3	22.3	22.3	22.3	22.3	1.0	22.2	22.3	22.3	22.2	22.3																	
	36		18	2.9	18.4	18.3	18.3	18.3	18.4	3.0	18.4	18.3	18.3	18.4	18.4	3.0	22.2	22.2	22.3	22.3	22.2	1.0	22.3	22.1	22.3	22.3	22.3																	
	36		37	2.9	18.4	18.3	18.3	18.4	18.3	3.0	18.4	18.4	18.3	18.3	18.4	3.0	22.2	22.3	22.2	22.3	22.3	1.0	22.2	22.3	22.3	22.2	22.2																	
	75		0	2.9	18.4	18.4	18.4	18.3	18.4	3.0	18.3	18.4	18.3	18.3	18.3	3.0	22.3	22.3	22.3	22.2	22.2	1.0	22.3	22.3	22.2	22.3	22.3																	

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B													
					Target MPR	UAT 1					Target MPR	LAT 1					Target MPR	UAT 1					Target MPR	LAT 1				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	10	QPSK	1	0	0.0	212	212	212	213	212	0.0	213	212	212	213	0.0	25.0	25.1	25.0	25.1	25.0	0.0	23.3	23.3	23.3	23.2	23.2	
			1	24	0.0	212	212	212	213	213	0.0	212	213	212	213	212	0.0	25.0	25.1	25.1	25.1	25.0	0.0	23.2	23.2	23.1	23.3	23.3
			1	49	0.0	212	212	213	213	213	0.0	213	213	213	213	213	0.0	25.1	25.1	25.1	25.1	25.0	0.0	23.3	23.3	23.3	23.3	23.3
			25	0	0.9	20.3	20.3	20.4	20.4	20.3	1.0	20.3	20.4	20.3	20.4	20.3	1.0	24.3	24.3	24.2	24.3	24.2	0.0	23.2	23.3	23.3	23.3	23.2
			25	12	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.2	20.4	20.4	20.4	20.2	1.0	24.2	24.2	24.3	24.2	24.2	0.0	23.3	23.3	23.3	23.3	23.3
			25	24	0.9	20.3	20.4	20.3	20.4	20.3	1.0	20.3	20.3	20.4	20.3	20.4	1.0	24.3	24.3	24.3	24.3	24.3	0.0	23.3	23.2	23.3	23.2	23.3
		16QAM	50	0	0.9	20.3	20.3	20.3	20.4	20.3	1.0	20.3	20.4	20.3	20.4	20.3	1.0	24.3	24.3	24.2	24.3	24.2	0.0	23.2	23.3	23.3	23.2	23.3
			1	0	0.9	20.3	20.3	20.4	20.3	20.4	1.0	20.3	20.3	20.4	20.3	20.3	1.0	24.2	24.2	24.2	24.2	24.2	0.0	23.3	23.3	23.3	23.2	23.3
			1	24	0.9	20.4	20.3	20.3	20.4	20.3	1.0	20.4	20.4	20.4	20.3	20.4	1.0	24.2	24.3	24.3	24.3	24.3	0.0	23.3	23.2	23.3	23.3	23.3
			1	49	0.9	20.3	20.4	20.4	20.4	20.3	1.0	20.3	20.4	20.3	20.4	20.3	1.0	24.3	24.3	24.3	24.3	24.2	0.0	23.2	23.3	23.2	23.3	23.3
			25	0	1.9	19.3	19.4	19.4	19.3	19.3	2.0	19.4	19.4	19.4	19.4	19.4	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.3	23.3	23.3
			25	12	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.4	2.0	23.2	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.2	23.3	23.3
		64QAM	25	24	1.9	19.3	19.3	19.4	19.3	19.3	2.0	19.4	19.4	19.4	19.4	19.4	2.0	23.2	23.2	23.3	23.2	23.2	0.0	23.3	23.3	23.3	23.2	23.3
			50	0	1.9	19.4	19.3	19.4	19.3	19.4	2.0	19.4	19.3	19.4	19.4	19.4	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.2	23.3	23.3	23.2	23.3
			1	0	1.9	19.4	19.3	19.4	19.4	19.3	2.0	19.3	19.3	19.4	19.3	19.4	2.0	23.3	22.2	23.3	22.2	23.3	0.0	23.3	23.2	23.2	23.3	23.2
			1	24	1.9	19.4	19.3	19.4	19.4	19.4	2.0	19.4	19.4	19.4	19.4	19.4	2.0	23.2	23.2	23.3	23.2	23.3	0.0	23.2	23.2	23.3	23.2	23.3
			1	49	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.4	19.4	19.4	19.4	2.0	23.3	23.3	23.2	23.3	23.3	0.0	23.3	23.3	23.2	23.3	23.3
			25	0	2.9	18.4	18.4	18.3	18.4	18.4	3.0	18.3	18.3	18.3	18.3	18.3	3.0	22.3	22.3	22.3	22.3	22.3	1.0	22.3	22.3	22.3	22.2	22.2
			25	12	2.9	18.4	18.3	18.4	18.3	18.4	3.0	18.4	18.3	18.4	18.3	18.4	3.0	22.2	22.3	22.3	22.2	22.2	1.0	22.3	22.3	22.1	22.3	22.3
			25	24	2.9	18.4	18.3	18.4	18.3	18.4	3.0	18.4	18.3	18.3	18.4	18.3	3.0	22.3	22.2	22.3	22.2	22.2	1.0	22.3	22.2	22.3	22.2	22.2
			50	0	2.9	18.4	18.4	18.4	18.3	18.4	3.0	18.3	18.3	18.3	18.3	18.3	3.0	22.3	22.3	22.2	22.3	22.3	1.0	22.2	22.3	22.3	22.3	22.3
LTE Band 41	5	QPSK	1	0	0.0	212	212	212	213	212	0.0	213	213	212	212	213	0.0	25.0	25.0	25.0	25.1	25.0	0.0	23.2	23.3	23.2	23.3	23.3
			1	12	0.0	212	212	212	213	213	0.0	212	212	212	213	213	0.0	25.0	25.0	25.0	25.1	25.1	0.0	23.3	23.2	23.3	23.3	23.3
			1	24	0.0	212	212	213	213	213	0.0	213	213	213	213	213	0.0	25.1	25.0	25.0	25.1	25.1	0.0	23.3	23.3	23.3	23.3	23.3
			12	0	0.9	20.3	20.3	20.4	20.4	20.3	1.0	20.3	20.3	20.3	20.4	20.4	1.0	24.3	24.2	24.3	24.3	24.2	0.0	23.2	23.2	23.3	23.3	23.3
			12	7	0.9	20.2	20.3	20.4	20.4	20.3	1.0	20.2	20.3	20.4	20.4	20.3	1.0	24.2	24.2	24.3	24.2	24.3	0.0	23.3	23.3	23.3	23.3	23.3
			12	13	0.9	20.3	20.4	20.3	20.4	20.3	1.0	20.4	20.4	20.3	20.3	20.4	1.0	24.3	24.3	24.3	24.3	24.3	0.0	23.3	23.3	23.2	23.2	23.3
		16QAM	25	0	0.9	20.3	20.4	20.3	20.4	20.3	1.0	20.3	20.4	20.3	20.4	20.4	1.0	24.3	24.2	24.3	24.3	24.2	0.0	23.3	23.2	23.2	23.3	23.3
			1	0	0.9	20.4	20.3	20.4	20.3	20.4	1.0	20.3	20.4	20.3	20.3	20.4	1.0	24.2	24.2	24.3	24.2	24.2	0.0	23.3	23.3	23.3	23.3	23.3
			1	12	0.9	20.3	20.3	20.3	20.4	20.3	1.0	20.4	20.4	20.4	20.4	20.4	1.0	24.2	24.3	24.2	24.3	24.3	0.0	23.3	23.3	23.3	23.2	23.3
			1	24	0.9	20.3	20.4	20.4	20.4	20.3	1.0	20.3	20.3	20.3	20.4	20.3	1.0	24.3	24.2	24.2	24.3	24.3	0.0	23.3	23.2	23.2	23.3	23.2
			12	0	1.9	19.4	19.4	19.3	19.3	19.3	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.3	23.3	23.3	23.3	23.3	0.0	23.3	23.3	23.3	23.3	23.3
			12	7	1.9	19.4	19.3	19.3	19.3	19.4	2.0	19.4	19.3	19.4	19.3	19.3	2.0	23.2	23.3	23.2	23.3	23.3	0.0	23.3	23.3	23.2	23.3	23.2
		64QAM	12	13	1.9	19.3	19.3	19.4	19.4	19.3	2.0	19.4	19.3	19.4	19.4	19.4	2.0	23.2	23.2	23.2	23.2	23.3	0.0	23.3	23.3	23.2	23.3	23.3
			25	0	1.9	19.4	19.3	19.4	19.3	19.4	2.0	19.4	19.4	19.4	19.3	19.3	2.0	23.2	23.3	23.2	23.3	23.3	0.0	23.3	23.2	23.2	23.3	23.3
			1	0	1.9	19.4	19.3	19.4	19.4	19.4	2.0	19.4	19.3	19.3	19.3	19.4	2.0	23.3	23.3	23.3	22.2	23.3	0.0	23.2	23.3	23.3	23.2	23.2
			1	12	1.9	19.4	19.3	19.4	19.4	19.3	2.0	19.4	19.3	19.4	19.4	19.3	2.0	23.2	23.3	23.3	23.2	23.3	0.0	23.3	23.2	23.2	23.2	23.3
			1	24	1.9	19.4	19.3	19.3	19.4	19.4	2.0	19.4	19.3	19.4	19.4	19.4	2.0	23.3	23.3	23.3	23.3	23.2	0.0	23.3	23.3	23.3	23.3	23.2
			12	0	2.9	18.3	18.4	18.3	18.4	18.4	3.0	18.3	18.4	18.3	18.3	18.4	3.0	22.3	22.3	22.3	22.3	22.3	1.0	22.2	22.3	22.2	22.3	22.3
			12	7	2.9	18.3	18.4	18.4	18.4	18.3	3.0	18.4	18.3	18.4	18.3	18.4	3.0	22.3	22.2	22.3	22.3	22.3	1.0	22.3	22.3	22.3	22.3	22.1
			12	13	2.9	18.4	18.3	18.4	18.4	18.4	3.0	18.3	18.4	18.4	18.3	18.4	3.0	22.3	22.2	22.3	22.2	22.2	1.0	22.2	22.3	22.2	22.2	22.3
			25	0	2.9	18.4	18.3	18.4	18.3	18.4	3.0	18.3	18.4	18.3	18.3	18.3	3.0	22.3	22.3	22.3	22.3	22.2	1.0	22.3	22.2	22.3	22.3	22.3

9.5. LTE Rel. 11 Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPKD modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL} \{ \min(M_A, M_{\text{IM5}}), 0.5 \}$$

Where M_A is defined as follows

$$M_A = \begin{array}{ll} 8.2 & ; 0 \leq A < 0.025 \\ 9.2 - 40A & ; 0.025 \leq A < 0.05 \\ 8 - 16A & ; 0.05 \leq A < 0.25 \\ 4.83 - 3.33A & ; 0.25 \leq A \leq 0.4 \\ 3.83 - 0.83A & ; 0.4 \leq A \leq 1 \end{array}$$

and M_{IM5} is defined as follows

$$M_{\text{IM5}} = \begin{array}{ll} 4.5 & ; \Delta_{\text{IM5}} < 1.5 * \text{BW}_{\text{Channel_CA}} \\ 6.0 & ; 1.5 * \text{BW}_{\text{Channel_CA}} \leq \Delta_{\text{IM5}} < \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \\ M_A & ; \Delta_{\text{IM5}} \geq \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \end{array}$$

Where

$$A = N_{\text{RB_alloc}} / N_{\text{RB_agg}}$$

$$\Delta_{\text{IM5}} = \max(|F_{\text{C_agg}} - (3 * F_{\text{agg_alloc_low}} - 2 * F_{\text{agg_alloc_high}})|, |F_{\text{C_agg}} - (3 * F_{\text{agg_alloc_high}} - 2 * F_{\text{agg_alloc_low}})|)$$

$\text{CEIL}\{M_A, 0.5\}$ means rounding upwards to closest 0.5dB, i.e. $\text{MPR} \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible $W_{\text{GAP}} \leq 42.2$ MHz as follows

$$\text{MPR} = \text{CEIL}\{M_N, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{array}{ll} -0.125N + 18.25 & ; 2 \leq N \leq 50 \\ -0.0333 N + 13.67 & ; 50 < N \leq 200 \end{array}$$

Where $N = N_{\text{RB_alloc}}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

LTE Carrier Aggregation Test Signal Set-up Procedure**(Use normal LTE set-up procedure in addition with the following steps)**


Set to CMW-500 with following parameters:

- PCC tab:
 - Select the testing Operating Band, Channel, Frequency, Cell Bandwidth, Uplink RBs


The screenshot displays the LTE Signaling 1 - V3.5.40 - Base V 3.5.90 interface. The PCC tab is active. The 'Operating Band' is set to 'Band 7', 'Channel' to '2850 Ch', 'Frequency' to '2630.0 MHz', and 'Cell Bandwidth' to '20.0 MHz'. The 'Uplink' section shows '20850 Ch' and '2510.0 MHz'. The 'Downlink' section shows 'RS EPRE' as '-85.0 dBm/15kHz', 'Full Cell BW Pow.' as '-54.2 dBm', 'PUSCH Open Loop Nom.Power' as '23 dBm', and 'PUSCH Closed Loop Target Power' as '33.0 dBm'. The 'Sched.' section shows 'User def. Channels' and 'Multicenter UL'. The 'LTE Signaling' section shows 'ON'. The 'Config ...' button is highlighted in the bottom right corner.

- Go to "Config...."

- Go to "Scenario"
- Set to "2CC CA - 2 RF Out"

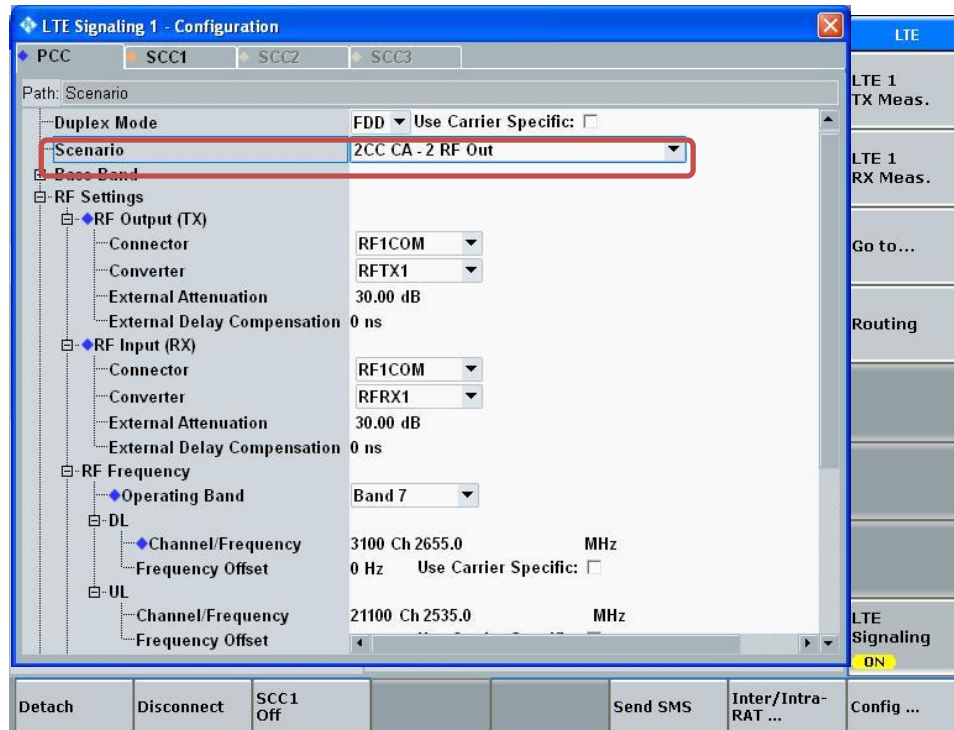

- Select "SCC1" tab
- Go to "Scenario"
- Set to "2CC CA - 2 RF Out"
- Enable "Use UL"
- Enable "Intraband Contiguous to PCC"
- Select "LTE Signaling" button

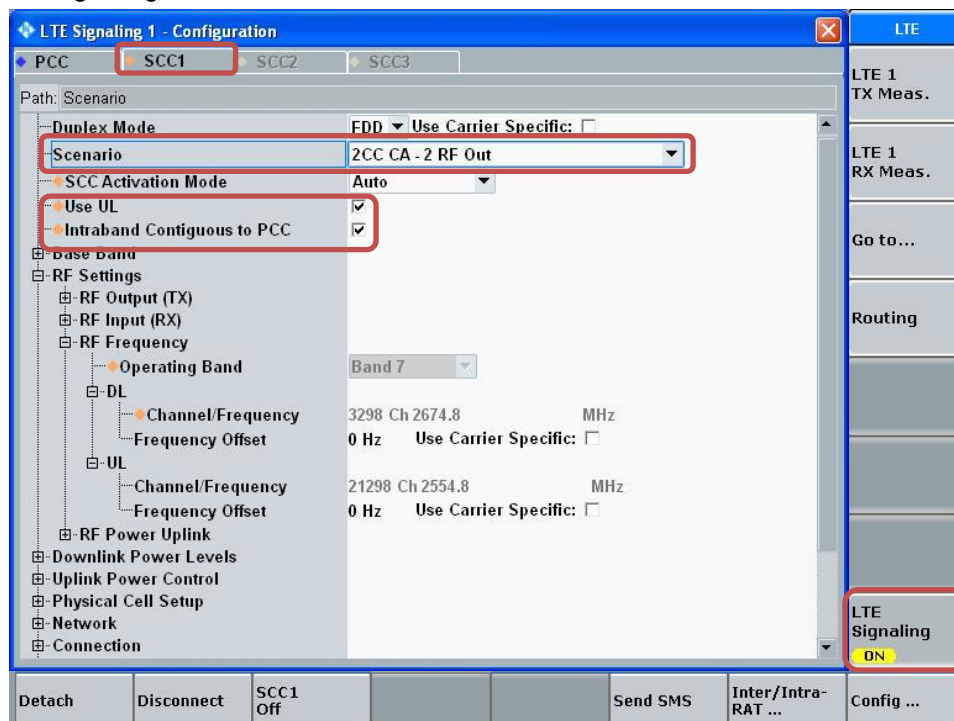

- Select “SCC1” tab
 - Select the testing Cell Bandwidth, Uplink RBs

The screenshot displays the LTE Signaling 1 - V3.5.40 - Base V 3.5.90 interface. The SCC1 tab is selected, and the configuration for the testing Cell Bandwidth and Uplink RBs is highlighted with a red box. The interface includes sections for Connection Status, Event Log, UE Info, and various configuration parameters.

Connection Status:

- Cell:
- Packet Switched:
- Connection Established:
- RRC State: Connected
- SCC1 State: MAC Activated

Event Log:

- 02:17:19 Redirection Successful
- 02:17:18 Tracking Area Update Received
- 02:17:18 RRC Connection Established
- 02:17:17 RRC Connection Released
- 02:17:16 Redirection Start
- 02:17:12 Redirection Successful

UE Info:

- IMEI: 359250065123018
- IMSI: 001010000150503
- Voice Domain Pr...: IMS PS Voice preferred CS Voic
- UE's Usage Settl...: Voice centric
- Default Bearer: IPv4 address 192.168.48.129fc01:abab:cdcl
- Dedicated Bearer: TFT Port Range DL / UL 5005 - 5008 / 5005 - 5008


Configuration Parameters:

Parameter	Downlink	Uplink
Operating Band	Band 7	FDD
Channel	3048 Ch	21048 Ch
Frequency	2649.8 MHz	2529.8 MHz
Cell Bandwidth	20.0 MHz	20.0 MHz
RS EPRE	-85.8 dBm/15kHz	
Full Cell BW Pow.	-55.0 dBm	
PUSCH Open Loop Nom.Power	23 dBm	
PUSCH Closed Loop Target Power	33.0 dBm	
Intraband Contiguous to PCC	☒	
PCC <-> SCC1	Swap	
PCC -> SCC1	Copy	
Sched. User def. Channels	☐	Multicenter UL
#RB	100	100
Start RB	0	0
Mod / TBSI	QPSK 5	QPSK 10
Code Rate / TBS	0.320 8760	0.613 17568
Throughput	8.760 Mbit/s	17.568 Mbit/s


Buttons: Detach, Disconnect, SCC1 Off, Send SMS, Inter/Intra-RAT ..., Config ...

Max Power Setting

- Select “Config ...” button
- Select PCC tab
- Set “Active TPC Setup” to “Max Power”

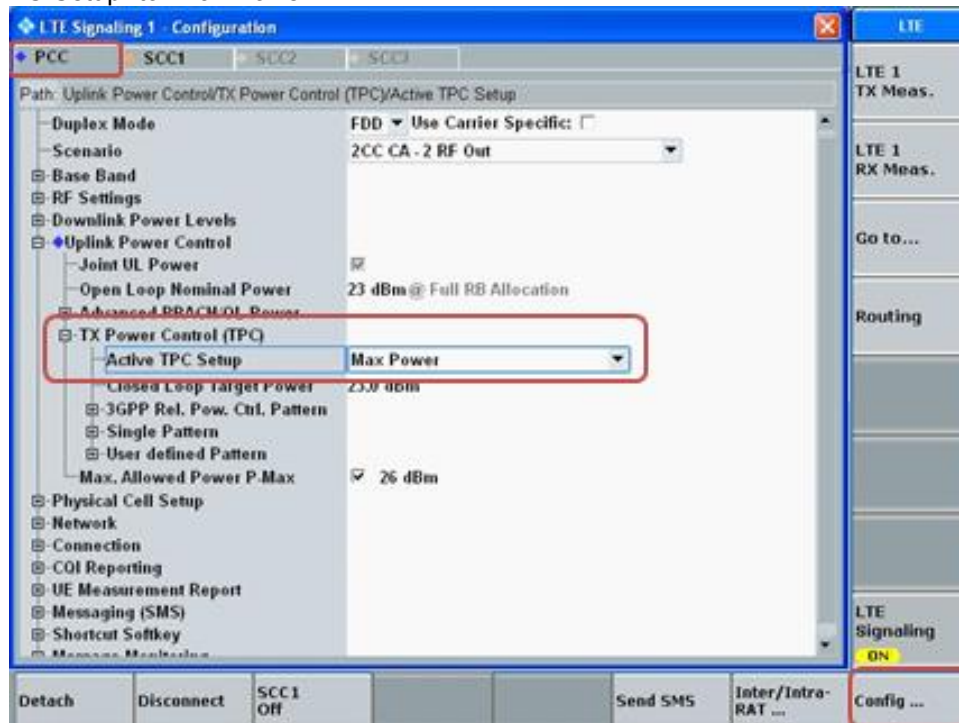


- Select SCC1 tab
- Verify that “Active TPC Setup” is set to “Max Power”

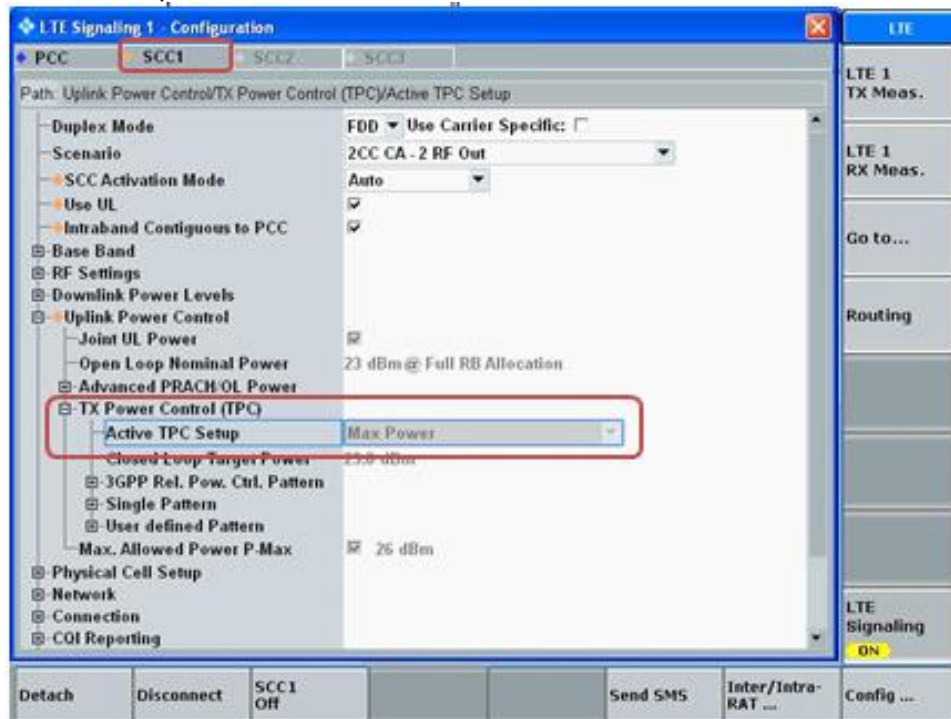

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

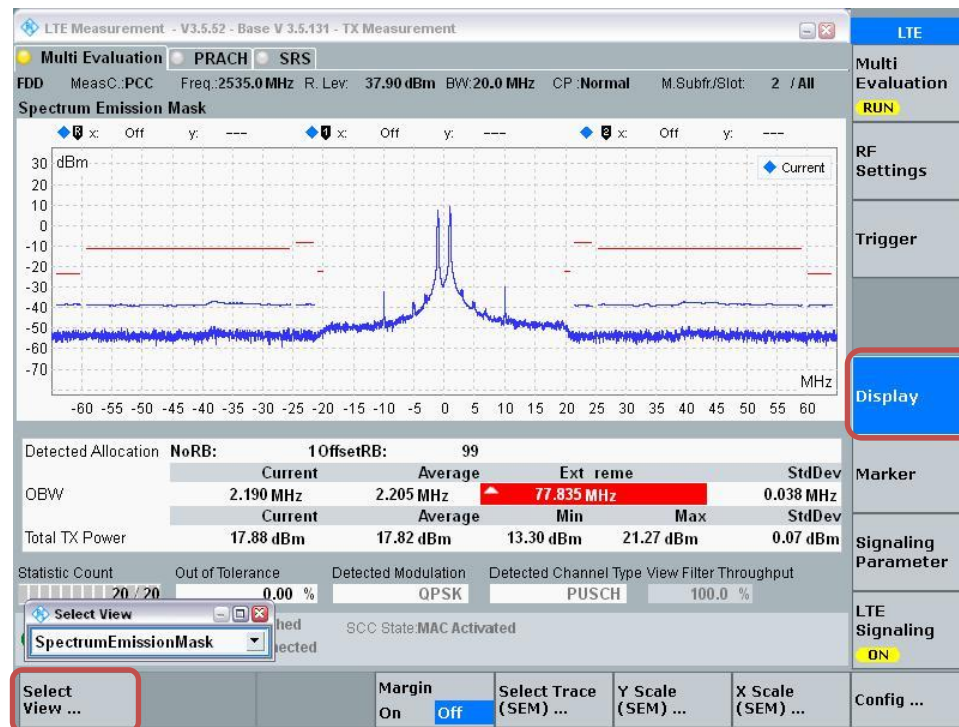

LTE Advanced Carrier Aggregation Combinations:

The tables below show the supported frequency bands and bandwidths of the device for DL Inter-band and DL Intra-band combinations.

DL Inter-Band (2 Bands, 3CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-2A-5A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 5			Yes	Yes			
CA_2A-2A-12A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 12			Yes	Yes			
CA_2A-2A-13A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 13				Yes			
CA_2A-2A-29A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 29			Yes	Yes			
CA_2A-2A-30A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 30			Yes	Yes			
CA-2A-4A (0) (1) (2)	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	40 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 2			Yes	Yes			20 MHz
	Band 4			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 4			Yes	Yes	Yes	Yes	
CA_2A-5A (0) (1)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 5			Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 5			Yes	Yes			
CA_2C-5A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 5			Yes	Yes			
CA_2A-12A (0) (1) (2)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 12		Yes	Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 12			Yes	Yes			
CA_2C-12A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 12			Yes	Yes			

CA-2A-12B (0)	Band 2			Yes	Yes	Yes	Yes	35 MHz
	Band 12	See CA_12B (0)						
CA_2A-13A (0) (1)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 13				Yes			
	Band 2			Yes	Yes			20 MHz
	Band 13				Yes			
CA_2A-17A (0)	Band 2			Yes	Yes			20 MHz
	Band 17			Yes	Yes			
CA-2A-29A (0) (1) (2)	Band 2			Yes	Yes			20 MHz
	Band 29		Yes	Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 29			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 29			Yes	Yes			
CA-2C-29A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 29			Yes	Yes			
CA_2A-30A (0)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 30			Yes	Yes			
CA_2C-30A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 30			Yes	Yes			
CA_2A-66A (0) (1) (2)	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	40 MHz
	Band 66			Yes	Yes	Yes	Yes	
	Band 2			Yes	Yes			20 MHz
	Band 66			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-66B (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 66	See CA_66B (0)						
CA-2A-66C (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 66	See CA_66C (0)						
CA_4A-4A-5A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 5			Yes	Yes			
CA_4A-4A-7A (0) (1)	Band 4			Yes	Yes			40 MHz
	Band 4			Yes	Yes			
	Band 7			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	

	Band 4			Yes	Yes	Yes	Yes	
	Band 7			Yes	Yes	Yes	Yes	
CA_4A-4A-12A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 12			Yes	Yes			
CA_4A-4A-13A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 13				Yes			
CA_4A-4A-29A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 29			Yes	Yes			
CA_4A-4A-30A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 30			Yes	Yes			
CA_4A-5A (0) (1)	Band 4			Yes	Yes			20 MHz
	Band 5			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 5			Yes	Yes			
CA_4A-7A (0) (1)	Band 4			Yes	Yes			30 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 7			Yes	Yes	Yes	Yes	
CA_4A-12A (0) (1) (2) (3) (4) (5)	Band 4	Yes	Yes	Yes	Yes			20 MHz
	Band 12			Yes	Yes			
	Band 4	Yes	Yes	Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 12		Yes	Yes	Yes			
	Band 4			Yes	Yes			20 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes		20 MHz
	Band 12			Yes				
CA_4A-12B (0)	Band 4			Yes	Yes	Yes	Yes	35 MHz
	Band 12	See CA_12B (0)						
CA_4A-13A (0) (1)	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 13				Yes			
	Band 4			Yes	Yes			20 MHz

	Band 13				Yes			
CA_4A-17A (0)	Band 4			Yes	Yes			20 MHz
	Band 17			Yes	Yes			
CA_4A-29A (0) (1) (2)	Band 4			Yes	Yes			20 MHz
	Band 29		Yes	Yes	Yes			
	Band 4			Yes	Yes			20 MHz
	Band 29			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 29			Yes	Yes			
CA_4A-30A (0)	Band 4			Yes	Yes	Yes	Yes	20 MHz
	Band 30			Yes	Yes			
CA_5A-7A (0) (1)	Band 5	Yes	Yes	Yes	Yes			30 MHz
	Band 7				Yes	Yes	Yes	
	Band 5			Yes	Yes			30 MHz
	Band 7				Yes	Yes	Yes	
CA_5A-25A (0)	Band 5			Yes	Yes			30 MHz
	Band 25			Yes	Yes	Yes	Yes	
CA_5A-30A (0)	Band 5			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_5A-66A (0)	Band 5			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_7A-12A (0)	Band 7			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
CA_12A-30A (0)	Band 12			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_12A-66A (0) (1) (2) (3) (4) (5)	Band 12			Yes	Yes			20 MHz
	Band 66	Yes	Yes	Yes	Yes			
	Band 12			Yes	Yes			30 MHz
	Band 66	Yes	Yes	Yes	Yes	Yes	Yes	
	Band 12		Yes	Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			20 MHz
	Band 66			Yes	Yes			
	Band 12			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	

	Band 12			Yes				20 MHz
	Band 66			Yes	Yes	Yes		
CA_12A-66A-66A (0)	Band 12			Yes	Yes			50 MHz
	Band 66	See CA_66A-66A (0)						
CA_12A_66C (0)	Band 12			Yes	Yes			50 MHz
	Band 66	See CA_66C (0)						
CA_13A-66A (0)	Band 13			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_25A-26A (0) (1) (2)	Band 25		Yes	Yes	Yes	Yes	Yes	35 MHz
	Band 26	Yes	Yes	Yes	Yes	Yes		
	Band 25		Yes	Yes	Yes			20 MHz
	Band 26		Yes	Yes	Yes			
	Band 25			Yes	Yes			20 MHz
	Band 26			Yes	Yes			
CA_29A-30A (0)	Band 29			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_30A-66A (0)	Band 30			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	

DL Inter-Band (3 Bands, 4CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-2A-5A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-2A-12A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-2A-29A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-29A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-4A-5A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	

	Band 5			Yes	Yes			
CA_2A-4A-12A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
CA_2A-4A-13A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 13				Yes			
CA_2A-4A-29A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 29			Yes	Yes			
CA_2A-4A-30A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 30			Yes	Yes			
CA_2A-5A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-5A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-5A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 5			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-12A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-12A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-12A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 12			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-13A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 13			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA-2A-29A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 29			Yes	Yes			

	Band 30			Yes	Yes			
CA_2A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2C_29A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-5A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-12A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-29A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-5A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-7A-12A (0) (1)	Band 4			Yes	Yes			40 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	50 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
CA_4A-12A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-29A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_5A-30A-66A (0)	Band 5			Yes	Yes			40 MHz
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_12A-30A-66A (0)	Band 12			Yes	Yes			40 MHz

	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	

DL Inter-Band (4 Bands, 4CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-4A-5A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA2A-4A-12A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-4A-29A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-5A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-12A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	

DL Intra-Band Non-Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_2A-2A (0)	Band 2	5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_4A-4A (0) (1)	Band 4	5, 10, 15, 20	5, 10, 15, 20		40 MHz
		5, 10	5, 10		20 MHz
CA_7A-7A (0) (1) (2) (3)	Band 7	5	15		40 MHz
		10	10, 15		
		15	15, 20		
		20	20		
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
		5, 10, 15, 20	5, 10		30 MHz

		10, 15, 20	10, 15, 20		40 MHz
CA_25A-25A (0) (1)	Band 25	5, 10	5, 10		20 MHz
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_41A-41A (0) (1)	Band 41	10, 15, 20	10, 15, 20		40 MHz
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_41A-41C (0)	Band 41	5, 10, 15, 20	See CA_41C (1)		60 MHz
CA_41C_41A (0)	Band 41	See CA_41C (1)	5, 10, 15, 20		60 MHz
CA_66A-66A (0)	Band 66	5, 10, 15, 20	5, 10, 15, 20		40 MHz

DL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_2C (0)	Band 2	5	20		40 MHz
		10	15, 20		
		15	10, 15, 20		
		20	5, 10, 15, 20		
CA_7B (0)	Band 7	15	5		20 MHz
CA_7C (0) (1) (2)	Band 7	15	15		40 MHz
		20	20		40 MHz
		10	20		
		15	15, 20		
		20	10, 15, 20		40 MHz
		15	10, 15		
		20	15, 20		
CA_12B (0)	Band 12	5	5, 10		15 MHz
CA_41C (0) (1) (2) (3)	Band 41	10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		5, 10	20		40 MHz
		15	15, 20		
		20	5, 10, 15, 20		
		10	15, 20		40 MHz
		15	10, 15, 20		
		20	10, 15, 20		
		10	20		40 MHz
		20	20		

CA_41D (0)	Band 41	10	20	15	40 MHz
		10	15, 20	20	
		15	20	10, 15	
		15	10, 15, 20	20	
		20	15, 20	10	
		20	10, 15, 20	15, 20	
CA_66B (0)	Band 66	5	5, 10, 15		20 MHz
		10	5, 10		
		15	5		
CA_66C (0)	Band 66	10	15, 20		40 MHz
		15	10, 15, 20		
		20	5, 10, 15, 20		

UL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_7C (0) (1) (2)	Band 7	15	15		40 MHz
		20	20		
		10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		15	10, 15		40 MHz
		20	15, 20		
CA_41C (0) (1) (2) (3)	Band 41	10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		5, 10	20		40 MHz
		15	15, 20		
		20	5, 10, 15, 20		
		10	15, 20		40 MHz
		15	10, 15, 20		
		20	10, 15, 20		
		10	20		40 MHz
		20	20		

Carrier Aggregation Power Measurements:

Power measurements were performed on the channel with the highest maximum output power from Tune-up Procedure on LAT antenna, Head power table on QPSK modulation following the Manufacturer KDB inquiry - Carrier Aggregation.

When carrier aggregation is limited to downlink only, uplink maximum output power (single carrier) is measured for the supported combinations of downlink carrier aggregation listed in the table below. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs (far right most configuration highlighted in the table below).

E-UTRA CA configuration (BCS)				
DL Inter-Band (2 Bands, 2CC)	DL Inter-Band (2 Bands, 3CC)	DL Inter-Band (3 Bands, 3CC)	DL Inter-Band (3 Bands, 4CC)	DL Inter-Band (4 Bands, 4CC)
CA_2A-4A(0)(1)(2)				CA_2A-4A-5A-30A(0)
CA_2A-5A(0)(1)	CA_2A-2A-5A(0)	CA_2A-4A-5A(0)		CA_2A-4A-5A-30A(0)
	CA_2C-5A(0)			
	CA_2C-30A(0)			
		CA_2A-5A-30A(0)	CA_2A-2A-5A-30A(0)	CA_2A-4A-5A-30A(0)
			CA_2C-5A-30A(0)	
CA_4A-5A(0)(1)	CA_4A-4A-5A(0)			CA_2A-4A-5A-30A(0)
CA_4A-30A(0)	CA_4A-4A-30A(0)	CA_4A-5A-30A(0)	CA_4A-4A-5A-30A(0)	CA_2A-4A-5A-30A(0)
CA_5A-30A(0)				CA_2A-4A-5A-30A(0)
CA_2A-12A(0)(1)(2)	CA_2A-2A-12A(0)	CA_2A-4A-12A(0)		CA_2A-4A-12A-30A(0)
		CA_2A-12A-30A(0)	CA_2A-2A-12A-30A(0)	CA_2A-4A-12A-30A(0)
			CA_2C-12A-30A(0)	
	CA_2A-12B(0)			
	CA_2C-12A(0)			
		CA_4A-12A-30A(0)	CA_4A-4A-12A-30A(0)	CA_2A-4A-12A-30A(0)
CA_4A-12A(0)(1)(2)(3)(4)(5)	CA_4A-4A-12A(0)	CA_4A-7A-12A(0)(1)		
	CA_4A-12B(0)			
CA_12A-30A(0)				CA_2A-4A-12A-30A(0)
CA_2A-29A(0)(1)(2)	CA_2A-2A-29A(0)	CA_2A-4A-29A(0)		CA_2A-4A-29A-30A(0)
CA_2A-30A(0)	CA_2A-2A-30A(0)	CA_2A-4A-30A(0)		CA_2A-4A-29A-30A(0)
CA_2C-29A(0)			CA_2C_29A-30A(0)	
		CA_2A-29A-30A(0)	CA_2A-2A-29A-30A(0)	CA_2A-4A-29A-30A(0)
CA_4A-29A(0)(1)(2)	CA_4A-4A-29A(0)			CA_2A-4A-29A-30A(0)
		CA_4A-29A-30A(0)	CA_4A-4A-29A-30A(0)	CA_2A-4A-29A-30A(0)
CA_29A-30A(0)				CA_2A-4A-29A-30A(0)
CA_2A-66A(0)(1)(2)		CA_2A-5A-66A(0)		CA_2A-5A-30A-66A(0)
		CA_2A_30A-66A(0)		CA_2A-5A-30A-66A(0)
	CA_2A-66B(0)			
	CA_2A-66C(0)			
CA_5A-66A(0)		CA_5A-30A-66A(0)		
		CA_2A-12A-66A(0)		CA_2A-12A-30A-66A(0)
CA_12A-66A(0)(1)(2)(3)(4)(5)	CA_12A-66A-66A(0)	CA_12A-30A-66A(0)		CA_2A-12A-30A-66A(0)
CA_30A-66A(0)				CA_2A-12A-30A-66A(0)
	CA_12A-66C(0)			
CA_2A-13A(0)(1)	CA_2A-2A-13A(0)	CA_2A-4A-13A(0)		
		CA_2A-13A-66A(0)		
CA_2A-17A(0)				
CA_4A-7A(0)(1)	CA_4A-4A-7A(0)(1)			
CA_4A-13A(0)(1)	CA_4A-4A-13A(0)			
CA_4A-17A(0)				
CA_7A-12A(0)				
CA_5A-7A(0)(1)				
CA_5A-25A(0)				
CA_13A-66A(0)				
CA_25A-26A(0)(1)(2)				

DL Inter-Band (2 Bands, 2CC and 3CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2C-5A (0)	2C	2C	5A		20	1960	900	20	1980	1100	10	881.5	2525				QPSK	1	49	20	1880	18900	50	0	25.3	25.2	-0.1	13
	5A	2C	2C		10	881.5	2525	20	1960	900	20	1980	1100				QPSK	1	24	10	836.5	20525	50	0	24.8	24.6	-0.2	13
CA_2C-12A (0)	2C	2C	12A		20	1960	900	20	1980	1100	10	737.5	5095				QPSK	1	49	20	1880	18900	50	0	25.3	25.2	-0.1	13
	12A	2C	2C		10	737.5	5095	20	1960	900	20	1980	1100				QPSK	1	24	10	707.5	23095	50	0	24.8	24.8	0.0	13
CA-2A-12B (0)	2A	12B	12B		20	1960	900	10	737.5	5095	5	745	5170				QPSK	1	49	20	1880	18900	35	0	25.3	25.2	-0.1	12
	12B	12B	2A		10	737.5	5095	5	745	5170	20	1960	900				QPSK	1	24	10	707.5	23095	35	0	24.8	24.8	0.0	12
CA_2A-17A (0)	2A	17A			20	1960	900	10	740	5790							QPSK	1	49	20	1880	18900	20	0	25.3	25.2	-0.1	11
	17A	2A			10	740	5790	20	1960	900							QPSK	1	24	10	710	23790	20	0	24.8	24.8	0.0	11
CA_2C-30A (0)	2C	2C	30A		20	1960	900	20	1980	1100	10	2355	9820				QPSK	1	49	20	1880	18900	50	0	25.3	25.2	-0.1	13
	30A	2C	2C		10	2355	9820	20	1960	900	20	1980	1100				QPSK	1	24	10	2310	27710	50	0	23.8	23.8	0.0	13
CA_2A-66B (0)	2A	66B	66B		20	1960	900	15	2145	66786	5	2155	66866				QPSK	1	49	20	1880	18900	40	0	25.3	25.2	-0.1	14
	66B	66B	2A		15	2145	66786	5	2155	66866	20	1960	900				QPSK	1	49	15	1745	132322	40	0	25.3	25.2	-0.1	14
CA-2A-66C (0)	2A	66C	66C		20	1960	900	20	2145	66786	20	2165	66986				QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	14
	66C	66C	2A		20	2145	66786	20	2165	66986	20	1960	900				QPSK	1	49	20	1745	132322	60	0	25.3	25.2	-0.1	14
CA_4A-4A-7A (0) (1)	4A	4A	7A		20	2132.5	2175	20	2132.5	2175	20	2655	3100				QPSK	1	49	20	1732.5	20175	40	0	25.3	25.2	-0.1	13
	7A	4A	4A		20	2655	3100	20	2132.5	2175	20	2132.5	2175				QPSK	1	49	20	2535	21100	40	0	25.3	25.3	0.0	13
CA_4A-4A-13A (0)	4A	4A	13A		20	2132.5	2175	20	2132.5	2175	10	751	5230				QPSK	1	49	20	1732.5	20175	50	0	25.3	25.2	-0.1	12
	13A	4A	4A		10	751	5230	20	2132.5	2175	20	2132.5	2175				QPSK	1	24	10	782	23230	50	0	24.8	24.8	0.0	12
CA_4A-12B (0)	4A	12B	12B		20	2132.5	2175	10	737.5	5095	5A	745	5170				QPSK	1	49	20	1732.5	20175	35	0	25.3	25.2	-0.1	12
	12B	12B	4A		10	737.5	5095	5	745	5170	20	2132.5	2175				QPSK	1	24	10	707.5	23095	35	0	24.8	24.8	0.0	12
CA_4A-17A (0)	4A	17A			20	2132.5	2175	10	740	5790							QPSK	1	49	20	1732.5	20175	20	0	25.3	25.2	-0.1	11
	17A	4A			10	740	5790	20	2132.5	2175							QPSK	1	24	10	710	23790	20	0	24.8	24.8	0.0	11
CA_5A-7A (0) (1)	5A	7A			10	881.5	2525	20	2655	3100							QPSK	1	24	10	836.5	20525	30	0	24.8	24.6	-0.2	13
	7A	5A			20	2655	3100	10	881.5	2525							QPSK	1	49	20	2535	21100	30	0	25.3	25.3	0.0	13
CA_5A-25A (0)	5A	25A			10	881.5	2525	20	1962.5	8365							QPSK	1	24	10	836.5	20525	30	0	24.8	24.6	-0.2	12
	25A	5A			20	1962.5	8365	10	881.5	2525							QPSK	1	49	20	1882.5	26365	30	0	25.3	25.2	-0.1	12
CA_7A-12A (0)	7A	12A			20	2655	3100	10	737.5	5095							QPSK	1	49	20	2535	21100	30	0	25.3	25.3	0.0	12
	12A	7A			10	737.5	5095	20	2655	3100							QPSK	1	24	10	707.5	23095	30	0	24.8	24.8	0.0	12
CA_12A-66C (0)	12A	66C	66C		10	737.5	5095	20	2145	66786	20	2165	66986				QPSK	1	24	10	707.5	23095	50	0	24.8	24.8	0.0	14
	66C	66C	12A		20	2145	66786	20	2165	66986	10	737.5	5095				QPSK	1	49	20	1745	132322	50	0	25.3	25.2	-0.1	14
CA_13A-66A (0)	13A	66A			10	751	5230	20	2145	66786							QPSK	1	24	10	782	23230	30	0	24.8	24.8	0.0	14
	66A	13A			20	2145	66786	10	751	5230							QPSK	1	49	20	1745	132322	30	0	25.3	25.2	-0.1	14
CA_25A-26A (0) (1) (2)	25A	26A			20	1962.5	8365	10	876.5	8865							QPSK	1	49	20	1882.5	26365	35	0	25.3	25.2	-0.1	13
	26A	25A			10	876.5	8865	20	1962.5	8365							QPSK	1	24	10	831.5	26865	35	0	24.8	24.7	-0.1	13

DL Inter-Band (3 Bands, 3 CC and 4 CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-4A-13A (0)	2A	4A	13A		20	1960	900	20	2132.5	2175	10	751	5230				QPSK	1	49	20	1880	18900	50	0	25.3	25.2	-0.1	12
	4A	13A	2A		20	2132.5	2175	10	751	5230	20	1960	900				QPSK	1	49	20	1732.5	20175	50	0	25.3	25.2	-0.1	12
	13A	2A	4A		10	751	5230	20	1960	900	20	2132.5	2175				QPSK	1	24	10	782	23230	50	0	24.8	24.8	0.0	12
CA_2C-5A-30A (0)	2C	2C	5A	30A	20	1960	900	20	1980	1100	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	5A	30A	2C	2C	10	881.5	2525	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	836.5	20525	60	0	24.8	24.6	-0.2	13
	30A	2C	2C	5A	10	2355	9820	20	1960	900	20	1980	1100	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2C-12A-30A (0)	2C	2C	12A	30A	20	1960	900	20	1980	1100	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	12A	30A	2C	2C	10	737.5	5095	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	707.5	23095	60	0	24.8	24.8	0.0	13
	30A	2C	2C	12A	10	2355	9820	20	1960	900	20	1980	1100	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-13A-66A (0)	2A	13A	66A		20	1960	900	10	751	5230	20	2145	66786				QPSK	1	49	20	1880	18900	50	0	25.3	25.2	-0.1	14
	13A	66A	2A		10	751	5230	20	2145	66786	20	1960	900				QPSK	1	24	10	782	23230	50	0	24.8	24.8	0.0	14
	66A	2A	13A		20	2145	66786	20	1960	900	10	751	5230				QPSK	1	49	20	1745	132322	50	0	25.3	25.2	-0.1	14
CA_2C-29A-30A (0)	2C	2C	29A	30A	20	1960	900	20	1980	1100	10	722.5	9715	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	29A	30A	2C	2C	10	722.5	9715	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	DL Only	DL Only	60	0	DL Only	DL Only	DL Only	13
	30A	2C	2C	29A	10	2355	9820	20	1960	900	20	1980	1100	10	722.5	9715	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_4A-7A-12A (0) (1)	4A	7A	12A		20	2132.5	2175	20	2655	3100	10	737.5	5095				QPSK	1	49	20	1732.5	20175	50	0	25.3	25.2	-0.1	13
	7A	12A	4A		20	2655	3100	10	737.5	5095	20	2132.5	2175				QPSK	1	49	20	2535	21100	50	0	25.3	25.3	0.0	13
	12A	4A	7A		10	737.5	5095	20	2132.5	2175	20	2655	3100				QPSK	1	24	10	707.5	23095	50	0	24.8	24.8	0.0	13
CA_5A-30A-66A (0)	5A	30A	66A		10	881.5	2525	10	2355	9820	20	2145	66786				QPSK	1	24	10	836.5	20525	40	0	24.8	24.6	-0.2	14
	30A	66A	5A		10	2355	9820	20	2145	66786	10	881.5	2525				QPSK	1	24	10	2310	27710	40	0	23.8	23.8	0.0	14
	66A	5A	30A		20	2145	66786	10	881.5	2525	10	2355	9820				QPSK	1	49	20	1745	132322	40	0	25.3	25.2	-0.1	14

DL Inter-Band (4 Bands, 4CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulatio	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-4A-5A-30A (0)	2A	4A	5A	30A	20	1960	900	20	2132.5	2175	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	4A	5A	30A	2A	20	2132.5	2175	10	881.5	2525	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	25.3	25.2	-0.1	13
	5A	30A	2A	4A	10	881.5	2525	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	836.5	20525	60	0	24.8	24.7	-0.1	13
	30A	2A	4A	5A	10	2355	9820	20	1960	900	20	2132.5	2175	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA2A-4A-12A-30A (0)	2A	4A	12A	30A	20	1960	900	20	2132.5	2175	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	4A	12A	30A	2A	20	2132.5	2175	10	737.5	5095	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	25.3	25.2	-0.1	13
	12A	30A	2A	4A	10	737.5	5095	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	707.5	23095	60	0	24.8	24.8	0.0	13
	30A	2A	4A	12A	10	2355	9820	20	1960	900	20	2132.5	2175	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-4A-29A-30A (0)	2A	4A	29A	30A	20	1960	900	20	2132.5	2175	10	722.5	9715	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	13
	4A	29A	30A	2A	20	2132.5	2175	10	722.5	9715	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	25.3	25.2	-0.1	13
	29A	30A	2A	4A	10	722.5	9715	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	DL Only	DL Only	60	0	DL Only	DL Only	DL Only	13
	30A	2A	4A	29A	10	2355	9820	20	1960	900	20	2132.5	2175	10	722.5	9715	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-5A-30A-66A (0)	2A	5A	30A	66A	20	1960	900	10	881.5	2525	10	2355	9820	20	2145	66786	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	14
	5A	30A	66A	2A	10	881.5	2525	10	2355	9820	20	2145	66786	20	1960	900	QPSK	1	24	10	836.5	20525	60	0	24.8	24.7	-0.1	14
	30A	66A	2A	5A	10	2355	9820	20	2145	66786	20	1960	900	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	14
	66A	2A	5A	30A	20	2145	66786	20	1960	900	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1745	132322	60	0	25.3	25.2	-0.1	14
CA_2A-12A-30A-66A (0)	2A	12A	30A	66A	20	1960	900	10	737.5	5095	10	2355	9820	20	2145	66786	QPSK	1	49	20	1880	18900	60	0	25.3	25.2	-0.1	14
	12A	30A	66A	2A	10	737.5	5095	10	2355	9820	20	2145	66786	20	1960	900	QPSK	1	24	10	707.5	23095	60	0	24.8	24.8	0.0	14
	30A	66A	2A	12A	10	2355	9820	20	2145	66786	20	1960	900	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	14
	66A	2A	12A	30A	20	2145	66786	20	1960	900	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1745	132322	60	0	25.3	25.2	-0.1	14

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the CA configuration with the largest aggregated DL CA BW in each frequency band, independently for contiguous and non-contiguous CA; however, if the same frequency band is used for both contiguous and non-contiguous CA, power measurement was performed using the configuration with the largest aggregated BW and maximum output power among contiguous and non-contiguous CA.

E-UTRA CA configuration (BCS)		
DL Intra-Band Non-Contiguous	DL Intra-Band Contiguous	UL Intra-Band Contiguous
CA_2A-2A (0)	CA_2C (0)	CA_7C (0) (1) (2)
CA_4A_4A (0) (1)	CA_7B (0)	CA_41C (0) (1) (2) (3)
CA_7A_7A (0) (1) (2) (3)	CA_7C (0) (1) (2)	
CA_25A_25A (0) (1)	CA_12B (0)	
CA_41A-41A (0) (1)	CA_41C (0) (1) (2) (3)	
CA_41A-41C (0)	CA_41D (0)	
CA_41C_41A (0)	CA_66B (0)	
CA_66A-66A (0)	CA_66C (0)	

DL Intra-Band Non-Contiguous

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-2A (0)	2A	2A			20	1940	700	20	1980	1100							QPSK	1	49	20	1860	18700	40	0	25.3	25.2	-0.1	12
CA_4A_4A (0) (1)	4A	4A			20	2120	2050	20	2145	2300							QPSK	1	49	20	1720	20050	40	0	25.3	25.2	-0.1	12
CA_7A_7A (0) (1) (2) (3)	7A	7A			20	2630	2850	20	2680	3350							QPSK	1	49	20	2510	20850	40	0	25.3	25.3	0.0	12
CA_25A_25A (0) (1)	25A	25A			20	1940	8140	20	1985	8590							QPSK	1	49	20	1860	26140	40	0	25.3	25.2	-0.1	12
CA_41A-41A (0) (1)	41A	41A			20	2506	39750	20	2680	41490							QPSK	1	49	20	2506	39750	40	0	25.1	25.0	-0.1	12
CA_41A-41C (0)	41A	41C	41C		20	2506	39750	20	2660	41290	20	2680	41490				QPSK	1	49	20	2506	39750	60	0	25.1	25.0	-0.1	12
CA_41C_41A (0)	41C	41C	41A		20	2506	39750	20	2526	39950	20	2680	41490				QPSK	1	49	20	2506	39750	60	0	25.1	25.0	-0.1	12
CA_66A-66A (0)	66A	66A			20	2120	66536	20	2170	67035							QPSK	1	49	20	1720	132072	40	0	25.3	25.1	-0.2	13

DL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2C (0)	2C	2C			20	1960	900	20	1980	1100							QPSK	1	49	20	1880	18900	40	0	25.3	25.2	-0.1	12
CA_7B (0)	7B	7B			15	2655	3100	5	2665	3200							QPSK	1	36	15	2535	21100	20	0	25.3	25.3	0.0	13
CA_7C (0) (1) (2)	7C	7C			20	2655	3100	20	2675	3300							QPSK	1	49	20	2535	21100	40	0	25.3	25.3	0.0	13
CA_12B (0)	12B	12B			10	737.5	5095	5	745	5170							QPSK	1	24	10	707.5	23095	15	0	24.8	24.8	0.0	12
CA_41C (0) (1) (2) (3)	41C	41C			20	2593	40620	20	2613	40820							QPSK	1	49	20	2593	40620	40	0	25.3	25.1	-0.2	13
CA_41D (0)	41D	41D	41D		20	2593	40620	20	2613	40820	20	2633	41020				QPSK	1	49	20	2593	40620	60	0	25.3	25.1	-0.2	12
CA_66B (0)	66B	66B			15	2145	66786	5	2155	66886							QPSK	1	49	20	1745	132322	20	0	25.3	25.2	-0.1	13
CA_66C (0)	66C	66C			20	2145	66786	20	2165	66986							QPSK	1	49	20	1745	132322	40	0	25.3	25.2	-0.1	13

Uplink CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. One SAR configuration will be selected for UAT and one SAR configuration will be selected for LAT for each supported CA configuration. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for both antennas (UAT 1 and LAT 1) at with QPSK modulation based on the worst-case standalone SAR. The tune-up limits are provided in Section 6.3 of this report.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in Section 6.3 of this report.

LTE-uplink 2CA Band 7 for SAR testing (Refer to Section. 10.21.)

RF Exposure Conditions	Antenna	E-UTRA CA configuration (BCS)	Bands		DL						UL																				
			PCC	SCC	PCC			SCC			PCC						SCC						MPR	Standalone		Aggregate BW	PCC+SCC				
					1st	2nd	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Modulation	RB	Offset	BW		Freq	Ch		MPR	PCC CA Inactive	SCC CA Inactive	CA Power (Total PCC+SCC)	Delta
Head	UAT 1	CA 7C (0) (1) (2)	7C	7C	20	2630	2850	20	2649.8	3048	QPSK	1	99	20	2510	20850	QPSK	1	0	20	2529.8	21048	0	20.3	20.3	40	0	19.8	19.8	-0.5	13
Head	UAT 1	CA 7C (0) (1) (2)	7C	7C	20	2655	3100	20	2674.8	3298	QPSK	1	99	20	2535	21100	QPSK	1	0	20	2554.8	21298	0	20.3	20.3	40	0	19.8	19.7	-0.6	13
Head	UAT 1	CA 7C (0) (1) (2)	7C	7C	20	2680	3350	20	2660.2	3152	QPSK	1	0	20	2560	21350	QPSK	1	99	20	2540.2	21152	0	20.3	20.3	40	0	19.8	19.7	-0.6	13
Body	LAT 1	CA 7C (0) (1) (2)	7C	7C	20	2630	2850	20	2649.8	3048	QPSK	1	99	20	2510	20850	QPSK	1	0	20	2529.8	21048	0	22.0	22.0	40	0	22.0	21.8	-0.2	13
Body	LAT 1	CA 7C (0) (1) (2)	7C	7C	20	2655	3100	20	2674.8	3298	QPSK	1	99	20	2535	21100	QPSK	1	0	20	2554.8	21298	0	22.0	22.0	40	0	22.0	21.9	-0.1	13
Body	LAT 1	CA 7C (0) (1) (2)	7C	7C	20	2680	3350	20	2660.2	3152	QPSK	1	0	20	2560	21350	QPSK	1	99	20	2540.2	21152	0	22.0	22.0	40	0	22.0	22.0	0.0	13

LTE-uplink 2CA Band 41 for SAR testing (Refer to Section. 10.22.)

RF Exposure Conditions	Antenna	E-UTRA CA configuration (BCS)	Bands		DL						UL																				
			PCC	SCC	PCC			SCC			PCC						SCC						MPR	Standalone		PCC+SCC					
			1st	2nd	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch		PCC CA Inactive	SCC CA Inactive	Aggregated BW	MPR	Tune-Up Limit	CA Power (Total PCC+SCC)	Delta	3GPP Rel. #
Head	UAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2506	39750	20	2525.8	39948	QPSK	1	99	20	2506	39750	QPSK	1	0	20	2525.8	39948	0	21.2	21.2	40	0	19.3	19.2	-2.0	13
Head	UAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2549.5	40185	20	2569.3	40383	QPSK	1	99	20	2549.5	40185	QPSK	1	0	20	2569.3	40383	0	21.2	21.2	40	0	19.3	19.1	-2.1	13
Head	UAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2593	40620	20	2612.8	40818	QPSK	1	99	20	2593	40620	QPSK	1	0	20	2612.8	40818	0	21.2	21.2	40	0	19.3	19.1	-2.1	13
Head	UAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2636.5	41055	20	2656.3	41253	QPSK	1	99	20	2636.5	41055	QPSK	1	0	20	2656.3	41253	0	21.3	21.3	40	0	19.3	19.1	-2.2	13
Head	UAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2680	41490	20	2660.2	41292	QPSK	1	0	20	2680	41490	QPSK	1	99	20	2660.2	41292	0	21.3	21.3	40	0	19.3	19.0	-2.3	13
Body	LAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2506	39750	20	2525.8	39948	QPSK	1	99	20	2506	39750	QPSK	1	0	20	2525.8	39948	0	23.3	23.3	40	0	23.3	23.1	-0.2	13
Body	LAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2549.5	40185	20	2569.3	40383	QPSK	1	99	20	2549.5	40185	QPSK	1	0	20	2569.3	40383	0	23.3	23.3	40	0	23.3	23.2	-0.1	13
Body	LAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2593	40620	20	2612.8	40818	QPSK	1	99	20	2593	40620	QPSK	1	0	20	2612.8	40818	0	23.3	23.3	40	0	23.3	23.2	-0.1	13
Body	LAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2636.5	41055	20	2656.3	41253	QPSK	1	99	20	2636.5	41055	QPSK	1	0	20	2656.3	41253	0	23.3	23.3	40	0	23.3	23.3	0.0	13
Body	LAT1	CA 41C (0) (1) (2) (3)	41C	41C	20	2680	41490	20	2660.2	41292	QPSK	1	0	20	2680	41490	QPSK	1	99	20	2660.2	41292	0	23.2	23.2	40	0	23.3	23.2	0.0	13

9.6. WLAN SISO (P_{Cell_ON})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Measured Results

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11b	1 Tx	1	2412	13.0	13.0	20.5	20.5	15.5	15.5	15.5	15.5
			2	2417	13.0	13.0	22.0	22.0	15.5	15.5	15.5	15.5
			6	2437	13.0	13.0	22.0	22.0	15.5	15.5	15.5	15.5
			11	2462	13.0	13.0	22.0	22.0	15.5	15.5	15.5	15.5
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.3	802.11a	1 Tx	52	5260	Not Required	Not Required	21.0	21.0	Not Required	Not Required	Not Required	Not Required
			56	5280			21.0	21.0				
			60	5300			21.0	21.0				
			64	5320			19.0	19.0				
	802.11ac	1 Tx VHT80	58	5290	15.0	15.0	Not Required	Not Required	11.0	11.0	11.3	11.3
5.5	802.11a	1 Tx	104	5520	Not Required	Not Required	21.0	21.0	Not Required	Not Required	Not Required	Not Required
			120	5600			21.0	21.0				
			144	5720			21.0	21.0				
	802.11ac	1 Tx VHT80	106	5530	16.0	16.0	Not Required	Not Required	10.5	10.5	12.5	12.5
			122	5610	16.0	16.0			10.5	10.5	12.5	12.5
			138	5690	16.0	16.0			10.5	10.5	12.5	12.5
5.8	802.11a	1 Tx	149	5745	Not Required	Not Required	21.5	21.5	Not Required	Not Required	Not Required	Not Required
			157	5785			21.5	21.5				
			165	5825			21.5	21.5				
	802.11ac	1 Tx VHT80	155	5775	16.0	16.0	Not Required	Not Required	10.5	10.5	12.0	12.0

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.7. WLAN MIMO (P_{Cell_ON})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11g	2 Tx CDD	1	2412	13.0	13.0	16.5	16.5	15.5	15.5	15.5	15.5
			4	2427	13.0	13.0	21.5	21.5	15.5	15.5	15.5	15.5
			6	2437	13.0	13.0	21.5	21.5	15.5	15.5	15.5	15.5
			8	2447	13.0	13.0	21.5	21.5	15.5	15.5	15.5	15.5
			11	2462	13.0	13.0	16.5	16.5	15.5	15.5	15.5	15.5
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.3	802.11n	2 Tx HT40 CDD/STBC/SDM	54	5270	15.0	15.0	19.5	19.5	Not required	Not required	Not required	Not required
			62	5310	15.0	15.0	17.0	17.0	Not required	Not required	Not required	Not required
	802.11ac	2 Tx VHT80 CDD/STBC/SDM	58	5290	Not required	Not required	Not required	Not required	11.0	11.0	11.3	11.3
5.5	802.11ac	2 Tx VHT80 CDD/STBC/SDM	106	5530	16.0	16.0	16.5	16.5	10.5	10.3	12.5	12.3
			122	5610	16.0	16.0	19.5	19.5	10.5	10.3	12.5	12.3
			138	5690	16.0	16.0	19.5	19.5	10.5	10.3	12.5	12.3
5.8	802.11a	2 Tx	153	5765	16.0	16.0	21.5	21.5	Not required	Not required	Not required	Not required
			157	5785	16.0	16.0	21.5	21.5				
			161	5805	16.0	16.0	21.5	21.5				
	802.11ac	2 Tx VHT80 CDD/STBC/SDM	155	5775	Not required	Not required	Not required	Not required	10.5	10.5	12.0	12.0

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.8. WLAN SISO (P_{Cell_OFF})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11b	1 Tx	1	2412	18.3	18.3	20.5	20.5	18.8	18.8	20.5	20.5
			2	2417	18.3	18.3	22.0	22.0	18.8	18.8	20.8	20.8
			6	2437	18.3	18.2	22.0	22.0	18.8	18.8	20.8	20.8
			11	2462	18.3	18.3	22.0	22.0	18.8	18.8	20.8	20.8
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.3	802.11a	1 Tx	52	5260	21.0	21.0	21.0	21.0	Not required	Not required	Not required	Not required
			56	5280	21.0	21.0	21.0	21.0				
			60	5300	21.0	21.0	21.0	21.0				
			64	5320	19.0	19.0	19.0	19.0				
	802.11n	1 Tx HT40	54	5270	Not required	Not required	Not required	Not required	Not required	Not required	18.0	18.0
			62	5310	Not required	Not required	Not required	Not required			18.0	18.0
	802.11ac	1 Tx VHT80	58	5290	Not required	Not required	Not required	Not required	15.3	15.3	Not required	Not required
5.5	802.11a	1 Tx	104	5520	21.0	21.0	21.0	21.0	Not required	Not required	Not required	Not required
			120	5600	21.0	21.0	21.0	21.0				
			144	5720	21.0	21.0	21.0	21.0				
	802.11ac	1 Tx VHT80	106	5530	Not required	Not required	Not required	Not required	14.8	14.8	17.5	17.5
			122	5610					14.8	14.8	19.3	19.3
			138	5690					14.8	14.8	19.3	19.3
5.8	802.11a	1 Tx	149	5745	21.0	20.1	21.5	21.5	Not required	Not required	Not required	Not required
			157	5785	21.0	20.1	21.5	21.5				
			165	5825	21.0	20.1	21.5	21.5				
	802.11ac	1 Tx VHT80	155	5775	Not required	Not required	Not required	Not required	14.8	14.6	18.8	18.8

Note(s):

- The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.9. WLAN MIMO (P_{Cell_OFF})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11g	2 Tx CDD	1	2412	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
			4	2427	18.3	18.3	21.5	21.5	18.8	18.8	20.8	20.8
			6	2437	18.3	18.3	21.5	21.5	18.8	18.8	20.8	20.8
			8	2447	18.3	18.3	21.5	21.5	18.8	18.8	20.5	20.5
			11	2462	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.3	802.11n	2 Tx HT40 CDD/STBC/SD M	54	5270	19.5	19.5	19.5	19.5	15.3	15.3	18.0	17.9
			62	5310	17.0	17.0	17.0	17.0	15.3	15.3	17.0	17.0
5.5	802.11ac	2 Tx VHT80 CDD/STBC/SD M	106	5530	16.5	16.5	16.5	16.5	14.8	14.8	16.5	16.5
			122	5610	19.5	19.5	19.5	19.5	14.8	14.8	19.3	19.3
			138	5690	19.5	19.5	19.5	19.5	14.8	14.8	19.3	19.3
5.8	802.11a	2 Tx CDD	149	5745	21.0	21.0	21.5	21.5	Not Required	Not Required	Not Required	Not Required
			157	5785	21.0	21.0	21.5	21.5				
			165	5825	21.0	21.0	21.5	21.5				
	802.11ac	2 Tx VHT80 CDD/STBC/SD M	155	5775	Not Required	Not Required	Not Required	Not Required	14.8	14.8	18.8	18.8

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.10. Bluetooth

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

P_{low}

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
			39	2441	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
			78	2480	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0

P_{High}

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	12.0	12.0	16.5	16.5	13.5	13.5	13.5	13.5
			39	2441	12.0	12.0	16.5	16.5	13.5	13.5	13.5	13.5
			78	2480	12.0	12.0	16.5	16.5	13.5	13.5	13.5	13.5

$P_{standalone}$


Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	14.5	14.5	19.5	19.5	16.5	16.5	16.5	16.5
			39	2441	14.5	14.5	19.5	19.5	16.5	16.5	16.5	16.5
			78	2480	14.5	14.5	19.5	19.5	16.5	16.5	16.5	16.5

Notes:

1. Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
2. Bluetooth P_{low} is used with Wi-Fi and Cellular antennas are active or with Wi-Fi inactive and Cellular antenna is active.
3. Bluetooth $P_{standalone}$ is used with Wi-Fi and Cellular antennas are inactive.

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.885	3.752	76.89%	1.30

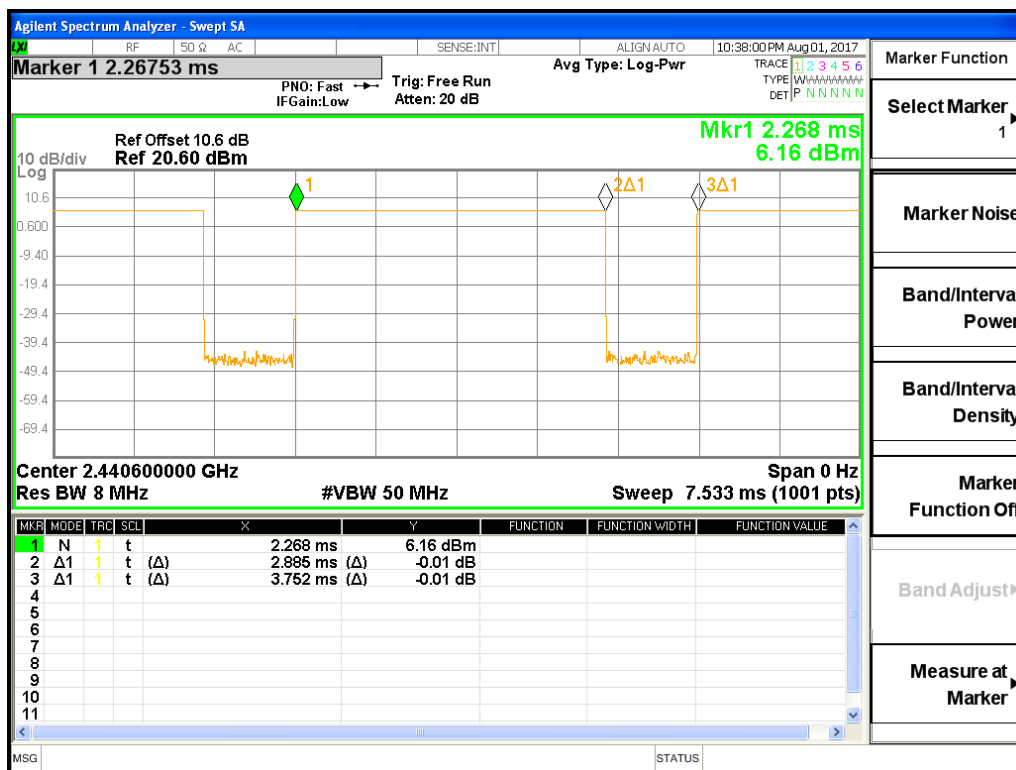GFSK Duty Cycle plot

10. Measured and Reported (Scaled) SAR Results

SAR Testing was performed based on the power measurement results from Sec. 9. Output power from both power modes: Mode A and Mode B were applied for each respective antenna. Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user. Mode C is used when the device is placed on a proprietary Apple wireless charger, as described in Sec. 6.3.5. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Test Tables were organized and labeled by antenna, UAT 1 and LAT 1 for cellular technologies. And for Wi-Fi/Bluetooth technologies, Test Tables were organized and labeled by power configuration and antenna (UAT 1 (Wi-Fi 2.4 GHz), UAT 2 (Wi-Fi 5 GHz), and LAT 3 (Wi-Fi-BT 2.4/5 GHz). Applicable SAR Test Reductions have been applied accordingly following the SAR KDB Procedure as follows:

GENERAL:

1. Reference from KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

2. Reference from KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

WIRELESS TECHNOLOGY:

3. Reference KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

4. Reference from KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- a) Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- b) When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- c) Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- d) Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- e) Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- f) For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

5. Reference from KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
 - > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
- For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
 - For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
 - When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
 - When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	GPRS 2 Slots	0	Left Touch	190	836.6	27.8	27.8	0.265	0.265	0.193	0.193	1
			Left Tilt	190	836.6	27.8	27.8	0.234	0.234	0.120	0.120	
			Right Touch	190	836.6	27.8	27.8	0.229	0.229	0.143	0.143	
			Right Tilt	190	836.6	27.8	27.8	0.182	0.182	0.099	0.099	
Body-worn & Hotspot	GPRS 2 Slots	5	Rear	190	836.6	27.8	27.8	0.181	0.181	0.100	0.100	
Front			190	836.6	27.8	27.8	0.127	0.127	0.071	0.071		
Hotspot			Edge 1	190	836.6	27.8	27.8	0.139	0.139	0.065	0.065	
			Edge 2	190	836.6	27.8	27.8	0.175	0.175	0.116	0.116	
			Edge 4	190	836.6	27.8	27.8	0.059	0.059	0.039	0.039	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	GPRS 2 Slots	0	Left Touch	190	836.6	30.3	30.3	0.181	0.181	0.139	0.139	
			Left Tilt	190	836.6	30.3	30.3	0.078	0.078	0.061	0.061	
			Right Touch	190	836.6	30.3	30.3	0.141	0.141	0.107	0.107	
			Right Tilt	190	836.6	30.3	30.3	0.080	0.080	0.063	0.063	
Body-worn & Hotspot	GPRS 2 Slots	5	Rear	190	836.6	30.3	30.3	0.268	0.268	0.140	0.140	2
Front			190	836.6	30.3	30.3	0.149	0.149	0.089	0.089		
Edge 2			190	836.6	30.3	30.3	0.142	0.142	0.093	0.093		
Edge 3			190	836.6	30.3	30.3	0.179	0.179	0.080	0.080		
Edge 4			190	836.6	30.3	30.3	0.269	0.269	0.178	0.178	3	
Hotspot												

10.2. GSM1900

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	26.0	25.0	0.221	0.278	0.121	0.152	4
			Left Tilt	661	1880.0	26.0	25.0	0.225	0.283	0.115	0.145	
			Right Touch	661	1880.0	26.0	25.0	0.512	0.645	0.271	0.341	
			Right Tilt	661	1880.0	26.0	25.0	0.508	0.640	0.232	0.292	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	5	Rear	661	1880.0	26.5	25.0	0.562	0.794	0.261	0.369	
Front			661	1880.0	26.5	25.0	0.323	0.456	0.162	0.229		
Edge 1			661	1880.0	26.5	25.0	0.381	0.538	0.159	0.225		
Edge 2			661	1880.0	26.5	25.0	0.037	0.052	0.018	0.025		
Edge 4			661	1880.0	26.5	25.0	0.252	0.356	0.136	0.192		
Hotspot												

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	29.8	28.5	0.092	0.124	0.058	0.078	
			Left Tilt	661	1880.0	29.8	28.5	0.062	0.084	0.037	0.050	
			Right Touch	661	1880.0	29.8	28.5	0.170	0.229	0.104	0.140	
			Right Tilt	661	1880.0	29.8	28.5	0.094	0.126	0.054	0.073	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	5	Rear	512	1850.2	27.3	27.3	1.030	1.030	0.495	0.495	5
				661	1880.0	27.3	27.3	0.900	0.900	0.424	0.424	
				810	1909.8	27.3	27.3	0.976	0.976	0.449	0.449	
Front			661	1880.0	27.3	27.3	0.406	0.406	0.214	0.214		
Edge 2			661	1880.0	27.3	27.3	0.443	0.443	0.245	0.245		
Hotspot			Edge 3	512	1850.2	27.3	27.3	0.863	0.863	0.357	0.357	
				661	1880.0	27.3	27.3	0.790	0.790	0.326	0.326	
				810	1909.8	27.3	27.3	0.838	0.838	0.332	0.332	
Edge 4			661	1880.0	27.3	27.3	0.099	0.099	0.053	0.053		

10.3. W-CDMA Band V

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4132	826.4	24.3	24.3	0.799	0.799	0.478	0.478	6
				4183	836.6	24.3	24.3	0.825	0.825	0.490	0.490	
				4233	846.6	24.3	24.3	0.809	0.809	0.479	0.479	
			Left Tilt	4183	836.6	24.3	24.3	0.785	0.785	0.400	0.400	
			Right Touch	4183	836.6	24.3	24.3	0.668	0.668	0.414	0.414	
			Right Tilt	4183	836.6	24.3	24.3	0.539	0.539	0.302	0.302	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	4183	836.6	24.3	24.3	0.667	0.667	0.367	0.367	7
			Front	4183	836.6	24.3	24.3	0.471	0.471	0.264	0.264	
Hotspot	Rel 99 RMC	5	Edge 1	4183	836.6	24.3	24.3	0.593	0.593	0.268	0.268	
			Edge 2	4183	836.6	24.3	24.3	0.644	0.644	0.423	0.423	
			Edge 4	4183	836.6	24.3	24.3	0.183	0.183	0.119	0.119	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	24.8	24.8	0.297	0.297	0.229	0.229	
			Left Tilt	4183	836.6	24.8	24.8	0.150	0.150	0.118	0.118	
			Right Touch	4183	836.6	24.8	24.8	0.242	0.242	0.187	0.187	
			Right Tilt	4183	836.6	24.8	24.8	0.152	0.152	0.122	0.122	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	4183	836.6	24.8	24.8	0.575	0.575	0.299	0.299	
			Front	4183	836.6	24.8	24.8	0.283	0.283	0.225	0.225	
Hotspot	Rel 99 RMC	5	Edge 2	4183	836.6	24.8	24.8	0.299	0.299	0.196	0.196	
			Edge 3	4183	836.6	24.8	24.8	0.297	0.297	0.138	0.138	
			Edge 4	4183	836.6	24.8	24.8	0.543	0.543	0.359	0.359	

10.4. W-CDMA Band IV

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	21.8	21.8	0.444	0.444	0.263	0.263	8
			Left Tilt	1413	1732.6	21.8	21.8	0.410	0.410	0.230	0.230	
			Right Touch	1312	1712.4	21.8	21.8	0.969	0.969	0.551	0.551	
				1413	1732.6	21.8	21.8	1.010	1.010	0.565	0.565	
				1513	1752.6	21.8	21.8	1.010	1.010	0.563	0.563	
			Right Tilt	1312	1712.4	21.8	21.8	0.817	0.817	0.402	0.402	
				1413	1732.6	21.8	21.8	0.805	0.805	0.398	0.398	
				1513	1752.6	21.8	21.8	0.847	0.847	0.411	0.411	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	1312	1712.4	22.3	22.3	0.746	0.746	0.387	0.387	
				1413	1732.6	22.3	22.3	0.844	0.844	0.435	0.435	
				1513	1752.6	22.3	22.3	0.818	0.818	0.421	0.421	
		Front	1413	1732.6	22.3	22.3	0.571	0.571	0.312	0.312		
Hotspot	Rel 99 RMC	5	Edge 1	1413	1732.6	22.3	22.3	0.781	0.781	0.364	0.364	
			Edge 2	1413	1732.6	22.3	22.3	0.038	0.038	0.023	0.023	
			Edge 4	1413	1732.6	22.3	22.3	0.383	0.383	0.223	0.223	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	25.3	25.3	0.427	0.427	0.278	0.278	
			Left Tilt	1413	1732.6	25.3	25.3	0.179	0.179	0.116	0.116	
			Right Touch	1413	1732.6	25.3	25.3	0.217	0.217	0.149	0.149	
			Right Tilt	1413	1732.6	25.3	25.3	0.200	0.200	0.127	0.127	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	1312	1712.4	24.5	24.4	0.797	0.816	0.462	0.473	9
				1413	1732.6	24.5	24.4	0.854	0.874	0.492	0.503	
				1513	1752.6	24.5	24.4	0.883	0.904	0.511	0.523	
			Front	1413	1732.6	24.5	24.4	0.516	0.528	0.354	0.362	
Hotspot	Rel 99 RMC	5	Edge 2	1413	1732.6	24.5	24.4	0.131	0.134	0.075	0.076	
			Edge 3	1413	1732.6	24.5	24.4	0.470	0.481	0.217	0.222	
			Edge 4	1413	1732.6	24.5	24.4	0.707	0.723	0.406	0.415	

10.5. W-CDMA Band II

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	19.5	19.5	0.279	0.279	0.158	0.158	10
			Left Tilt	9400	1880.0	19.5	19.5	0.266	0.266	0.134	0.134	
			Right Touch	9400	1880.0	19.5	19.5	0.656	0.656	0.348	0.348	
			Right Tilt	9400	1880.0	19.5	19.5	0.636	0.636	0.292	0.292	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	9400	1880.0	21.3	21.2	0.295	0.302	0.145	0.148	
			Front	9400	1880.0	21.3	21.2	0.239	0.245	0.119	0.122	
Hotspot	Rel 99 RMC	5	Edge 1	9400	1880.0	21.3	21.2	0.309	0.316	0.128	0.131	
			Edge 2	9400	1880.0	21.3	21.2	0.023	0.024	0.011	0.011	
			Edge 4	9400	1880.0	21.3	21.2	0.258	0.264	0.134	0.137	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	25.3	25.3	0.575	0.575	0.350	0.350	
			Left Tilt	9400	1880.0	25.3	25.3	0.217	0.217	0.123	0.123	
			Right Touch	9400	1880.0	25.3	25.3	0.422	0.422	0.260	0.260	
			Right Tilt	9400	1880.0	25.3	25.3	0.261	0.261	0.151	0.151	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	9262	1852.4	23.3	23.3	0.997	0.997	0.545	0.545	11
				9400	1880.0	23.3	23.3	0.977	0.977	0.491	0.491	
			Front	9538	1907.6	23.3	23.2	1.010	1.034	0.493	0.504	
				9400	1880.0	23.3	23.3	0.426	0.426	0.256	0.256	
Hotspot	Rel 99 RMC	5	Edge 2	9400	1880.0	23.3	23.3	0.171	0.171	0.092	0.092	
			Edge 3	9262	1852.4	23.3	23.3	0.660	0.660	0.331	0.331	
				9400	1880.0	23.3	23.3	0.875	0.875	0.418	0.418	
				9538	1907.6	23.3	23.3	0.994	0.994	0.457	0.457	
			Edge 4	9400	1880.0	23.3	23.3	0.551	0.551	0.299	0.299	

10.6. CDMA BC0

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	384	836.5	23.3	23.3	0.605	0.605	0.361	0.361	12
			Left Tilt	384	836.5	23.3	23.3	0.607	0.607	0.306	0.306	
			Right Touch	384	836.5	23.3	23.3	0.293	0.293	0.225	0.225	
			Right Tilt	384	836.5	23.3	23.3	0.158	0.158	0.125	0.125	
Head	1xEVDO (Rel. 0)	0	Left Touch	384	836.5	23.3	23.3	0.567	0.567	0.356	0.356	
			Left Tilt	384	836.5	23.3	23.3	0.559	0.559	0.289	0.289	
			Right Touch	384	836.5	23.3	23.3	0.523	0.523	0.325	0.325	
			Right Tilt	384	836.5	23.3	23.3	0.415	0.415	0.230	0.230	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	384	836.5	23.3	23.3	0.652	0.652	0.346	0.346	13
			Front	384	836.5	23.3	23.3	0.446	0.446	0.241	0.241	
Hotspot	1xRTT (RC3 SO32)	5	Edge 1	384	836.5	23.3	23.3	0.448	0.448	0.202	0.202	
			Edge 2	384	836.5	23.3	23.3	0.591	0.591	0.387	0.387	
			Edge 4	384	836.5	23.3	23.3	0.180	0.180	0.117	0.117	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	384	836.5	24.8	24.8	0.329	0.329	0.252	0.252	
			Left Tilt	384	836.5	24.8	24.8	0.156	0.156	0.123	0.123	
			Right Touch	384	836.5	24.8	24.8	0.293	0.293	0.225	0.225	
			Right Tilt	384	836.5	24.8	24.8	0.158	0.158	0.125	0.125	
Head	1xEVDO (Rel. 0)	0	Left Touch	384	836.5	24.8	24.8	0.341	0.341	0.262	0.262	
			Left Tilt	384	836.5	24.8	24.8	0.175	0.175	0.136	0.136	
			Right Touch	384	836.5	24.8	24.8	0.307	0.307	0.234	0.234	
			Right Tilt	384	836.5	24.8	24.8	0.216	0.216	0.168	0.168	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	384	836.5	24.8	24.8	0.564	0.564	0.304	0.304	
			Front	384	836.5	24.8	24.8	0.368	0.368	0.200	0.200	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	384	836.5	24.8	24.8	0.300	0.300	0.195	0.195	
			Edge 3	384	836.5	24.8	24.8	0.339	0.339	0.154	0.154	
			Edge 4	384	836.5	24.8	24.8	0.614	0.614	0.403	0.403	

10.7. CDMA BC1

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	600	1880.0	19.5	19.4	0.392	0.401	0.221	0.226	14
			Left Tilt	600	1880.0	19.5	19.4	0.367	0.376	0.190	0.194	
			Right Touch	25	1851.3	19.5	19.3	0.906	0.949	0.497	0.520	
				600	1880.0	19.5	19.4	1.050	1.074	0.564	0.577	
				1175	1908.8	19.5	19.5	1.070	1.070	0.568	0.568	
			Right Tilt	25	1851.3	19.5	19.3	0.871	0.912	0.419	0.439	
				600	1880.0	19.5	19.4	0.955	0.977	0.454	0.465	
				1175	1908.8	19.5	19.5	1.050	1.050	0.495	0.495	
Head	1xEVDO (Rel. 0)	0	Left Touch	600	1880.0	19.5	19.4	0.207	0.212	0.117	0.120	
			Left Tilt	600	1880.0	19.5	19.4	0.197	0.202	0.101	0.103	
			Right Touch	600	1880.0	19.5	19.4	0.501	0.513	0.268	0.274	
			Right Tilt	600	1880.0	19.5	19.4	0.484	0.495	0.224	0.229	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	25	1851.3	21.3	21.1	0.762	0.798	0.371	0.388	
				600	1880.0	21.3	21.2	0.846	0.866	0.407	0.416	
				1175	1908.8	21.3	21.2	0.822	0.841	0.395	0.404	
			Front	600	1880.0	21.3	21.2	0.517	0.529	0.269	0.275	
Hotspot	1xRTT (RC3 SO32)	5	Edge 1	25	1851.3	21.3	21.1	0.725	0.759	0.317	0.332	
				600	1880.0	21.3	21.2	0.790	0.808	0.335	0.343	
				1175	1908.8	21.3	21.2	0.763	0.781	0.324	0.332	
			Edge 2	600	1880.0	21.3	21.2	0.064	0.065	0.034	0.035	
			Edge 4	600	1880.0	21.3	21.2	0.604	0.618	0.313	0.320	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	600	1880.0	25.3	25.2	0.636	0.651	0.379	0.388	
			Left Tilt	600	1880.0	25.3	25.2	0.202	0.207	0.115	0.118	
			Right Touch	600	1880.0	25.3	25.2	0.372	0.381	0.228	0.233	
			Right Tilt	600	1880.0	25.3	25.2	0.239	0.245	0.139	0.142	
Head	1xEVDO (Rel. 0)	0	Left Touch	600	1880.0	25.3	25.2	0.562	0.575	0.349	0.357	
			Left Tilt	600	1880.0	25.3	25.2	0.216	0.221	0.129	0.132	
			Right Touch	600	1880.0	25.3	25.2	0.366	0.375	0.231	0.236	
			Right Tilt	600	1880.0	25.3	25.2	0.269	0.275	0.156	0.160	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	25	1851.3	23.3	23.2	0.990	1.013	0.528	0.540	
				600	1880.0	23.3	23.3	1.000	1.000	0.506	0.506	
				1175	1908.8	23.3	23.3	1.090	1.090	0.531	0.531	
			Front	600	1880.0	23.3	23.3	0.496	0.496	0.293	0.293	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	600	1880.0	23.3	23.3	0.207	0.207	0.110	0.110	
			Edge 3	25	1851.3	23.3	23.2	0.853	0.873	0.425	0.435	
				600	1880.0	23.3	23.3	1.040	1.040	0.499	0.499	
				1175	1908.8	23.3	23.3	1.060	1.060	0.494	0.494	
			Edge 4	600	1880.0	23.3	23.3	0.544	0.544	0.294	0.294	

10.8. CDMA BC10

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	560	820.0	23.3	23.2	0.618	0.632	0.369	0.378	16
			Left Tilt	560	820.0	23.3	23.2	0.558	0.571	0.278	0.284	
			Right Touch	560	820.0	23.3	23.2	0.458	0.469	0.300	0.307	
			Right Tilt	560	820.0	23.3	23.2	0.403	0.412	0.226	0.231	
Head	1xEVDO (Rel. 0)	0	Left Touch	560	820.0	23.3	23.2	0.587	0.601	0.362	0.370	
			Left Tilt	560	820.0	23.3	23.2	0.572	0.585	0.287	0.294	
			Right Touch	560	820.0	23.3	23.2	0.479	0.490	0.304	0.311	
			Right Tilt	560	820.0	23.3	23.2	0.371	0.380	0.207	0.212	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	560	820.0	23.3	23.2	0.544	0.557	0.288	0.295	
			Front	560	820.0	23.3	23.2	0.367	0.376	0.200	0.205	
Hotspot	1xRTT (RC3 SO32)	5	Edge 1	560	820.0	23.3	23.2	0.360	0.368	0.162	0.166	17
			Edge 2	560	820.0	23.3	23.2	0.597	0.611	0.393	0.402	
			Edge 4	560	820.0	23.3	23.2	0.201	0.206	0.131	0.134	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	560	820.0	24.8	24.8	0.276	0.276	0.212	0.212	
			Left Tilt	560	820.0	24.8	24.8	0.125	0.125	0.099	0.099	
			Right Touch	560	820.0	24.8	24.8	0.249	0.249	0.193	0.193	
			Right Tilt	560	820.0	24.8	24.8	0.124	0.124	0.098	0.098	
Head	1xEVDO (Rel. 0)	0	Left Touch	560	820.0	24.8	24.8	0.312	0.312	0.239	0.239	
			Left Tilt	560	820.0	24.8	24.8	0.196	0.196	0.154	0.154	
			Right Touch	560	820.0	24.8	24.8	0.265	0.265	0.203	0.203	
			Right Tilt	560	820.0	24.8	24.8	0.183	0.183	0.144	0.144	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	560	820.0	24.8	24.8	0.579	0.579	0.357	0.357	18
			Front	560	820.0	24.8	24.8	0.276	0.276	0.158	0.158	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	560	820.0	24.8	24.8	0.227	0.227	0.148	0.148	
			Edge 3	560	820.0	24.8	24.8	0.308	0.308	0.135	0.135	
			Edge 4	560	820.0	24.8	24.8	0.577	0.577	0.380	0.380	

10.9. LTE Band 2 (20MHz Bandwidth)

SAR for LTE Band 2 (Frequency range: 1850 - 1910 MHz) is covered by LTE Band 25 (Frequency range: 1850 - 1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.10. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710 - 1755 MHz) is covered by LTE Band 66 (Frequency range: 1710 - 1780 MHz) due to overlapping frequency range, same maximum tune-up limit and similar channel bandwidth.

10.11. LTE Band 5 (10MHz Bandwidth)

SAR for LTE Band 5 (Frequency range: 824 - 849 MHz) is covered by LTE Band 26 (Frequency range: 814 – 849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel

10.12. LTE Band 7 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	20850	2510.0	1	49	20.3	20.3	1.090	1.090	0.425	0.425	19
						50	24	20.3	20.3	0.914	0.914	0.360	0.360	
				21100	2535.0	1	49	20.3	20.3	0.996	0.996	0.381	0.381	
						50	24	20.3	20.3	0.827	0.827	0.322	0.322	
						100	0	20.3	20.3	1.020	1.020	0.390	0.390	
						21350	2560.0	1	49	20.3	20.3	0.982	0.982	
			50	24	20.3	20.3		0.832	0.832	0.318	0.318			
			Left Tilt	21100	2535.0	1	49	20.3	20.3	0.643	0.643	0.256	0.256	
						50	24	20.3	20.3	0.647	0.647	0.260	0.260	
			Right Touch	21100	2535.0	1	49	20.3	20.3	0.286	0.286	0.148	0.148	
						50	24	20.3	20.3	0.273	0.273	0.140	0.140	
			Right Tilt	21100	2535.0	1	49	20.3	20.3	0.226	0.226	0.111	0.111	
						50	24	20.3	20.3	0.248	0.248	0.123	0.123	
			Body-worn & Hotspot	QPSK	5	Rear	20850	2510.0	1	49	20.8	20.8	0.884	
50	49	20.8							20.8	0.889	0.889	0.379	0.379	
21100	2535.0	1					49	20.8	20.8	0.864	0.864	0.364	0.364	
		50					24	20.8	20.8	0.831	0.831	0.351	0.351	
		100					0	20.8	20.8	0.841	0.841	0.362	0.362	
21350	2560.0	1					49	20.8	20.8	0.821	0.821	0.346	0.346	
		50				24	20.8	20.8	0.863	0.863	0.363	0.363		
Front	21100	2535.0				1	49	20.8	20.8	0.619	0.619	0.273	0.273	
						50	24	20.8	20.8	0.428	0.428	0.194	0.194	
Hotspot	QPSK	5				Edge 1	21100	2535.0	1	49	20.8	20.8	0.451	0.451
			50	24	20.8				20.8	0.376	0.376	0.139	0.139	
			Edge 2	20850	2510.0	1	49	20.8	20.8	0.865	0.865	0.349	0.349	
						50	24	20.8	20.8	0.882	0.882	0.349	0.349	
				21100	2535.0	1	49	20.8	20.8	0.866	0.866	0.335	0.335	
						50	24	20.8	20.8	0.797	0.797	0.309	0.309	
						100	0	20.8	20.8	0.812	0.812	0.315	0.315	
				21350	2560.0	1	49	20.8	20.8	0.726	0.726	0.284	0.284	
			50			24	20.8	20.8	0.719	0.719	0.278	0.278		
			Edge 4	21100	2535.0	1	49	20.8	20.8	0.076	0.076	0.035	0.035	
50	24	20.8				20.8	0.085	0.085	0.038	0.038				

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	21100	2535.0	1	49	25.3	25.3	0.569	0.569	0.296	0.296	
						50	24	24.3	24.3	0.512	0.512	0.264	0.264	
			Left Tilt	21100	2535.0	1	49	25.3	25.3	0.172	0.172	0.088	0.088	
						50	24	24.3	24.3	0.186	0.186	0.095	0.095	
			Right Touch	21100	2535.0	1	49	25.3	25.3	0.280	0.280	0.155	0.155	
						50	24	24.3	24.3	0.240	0.240	0.133	0.133	
			Right Tilt	21100	2535.0	1	49	25.3	25.3	0.238	0.238	0.123	0.123	
						50	24	24.3	24.3	0.208	0.208	0.107	0.107	
			Rear	20850	2510.0	1	49	22.0	22.0	0.792	0.792	0.322	0.322	
						50	24	22.0	22.0	0.906	0.906	0.368	0.368	
				21100	2535.0	1	49	22.0	22.0	0.934	0.934	0.379	0.379	
						50	24	22.0	22.0	1.030	1.030	0.414	0.414	
				21350	2560.0	100	0	22.0	22.0	0.984	0.984	0.399	0.399	
						1	49	22.0	22.0	1.020	1.020	0.411	0.411	
				Front	20850	2510.0	50	24	22.0	1.040	1.040	0.418	0.418	20
						1	49	22.0	22.0	0.781	0.781	0.317	0.317	
					21100	2535.0	50	24	22.0	0.778	0.778	0.320	0.320	
						1	49	22.0	22.0	0.820	0.820	0.328	0.328	
					21350	2560.0	50	24	22.0	0.850	0.850	0.344	0.344	
						100	0	22.0	22.0	0.844	0.844	0.343	0.343	
Hotspot	QPSK	5	Edge 2	21100	2535.0	1	49	22.0	22.0	0.840	0.840	0.334	0.334	
						50	24	22.0	22.0	0.892	0.892	0.358	0.358	
			Edge 3	20850	2510.0	1	49	22.0	22.0	0.262	0.262	0.122	0.122	
						50	24	22.0	22.0	0.244	0.244	0.115	0.115	
					21100	2535.0	1	49	22.0	0.892	0.892	0.293	0.293	
						50	24	22.0	22.0	0.808	0.808	0.267	0.267	
				21350	2560.0	1	49	22.0	22.0	0.910	0.910	0.301	0.301	
						50	24	22.0	22.0	0.907	0.907	0.299	0.299	
					21100	2535.0	100	0	22.0	0.908	0.908	0.300	0.300	
						1	49	22.0	22.0	1.010	1.010	0.337	0.337	
			Edge 4	21100	2535.0	50	24	22.0	22.0	0.976	0.976	0.325	0.325	
						1	49	22.0	22.0	0.687	0.687	0.303	0.303	
						50	24	22.0	22.0	0.640	0.640	0.281	0.281	

10.13. LTE Band 12 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	24	24.0	24.0	0.384	0.384	0.290	0.290	21
						25	12	23.0	23.0	0.310	0.310	0.233	0.233	
			Left Tilt	23095	707.5	1	24	24.0	24.0	0.368	0.368	0.203	0.203	
						25	12	23.0	23.0	0.298	0.298	0.166	0.166	
			Right Touch	23095	707.5	1	24	24.0	24.0	0.370	0.370	0.233	0.233	
						25	12	23.0	23.0	0.304	0.304	0.192	0.192	
Body-worn & Hotspot	QPSK	5	Rear	23095	707.5	1	24	24.0	24.0	0.218	0.218	0.135	0.135	
						25	12	23.0	23.0	0.178	0.178	0.111	0.111	
			Front	23095	707.5	1	24	24.0	24.0	0.168	0.168	0.103	0.103	
						25	12	23.0	23.0	0.142	0.142	0.086	0.086	
			Edge 1	23095	707.5	1	24	24.0	24.0	0.237	0.237	0.118	0.118	
						25	12	23.0	23.0	0.199	0.199	0.098	0.098	
Hotspot	QPSK	5	Edge 2	23095	707.5	1	24	24.0	24.0	0.357	0.357	0.243	0.243	
						25	12	23.0	23.0	0.289	0.289	0.197	0.197	
			Edge 4	23095	707.5	1	24	24.0	24.0	0.131	0.131	0.090	0.090	
						25	12	23.0	23.0	0.107	0.107	0.073	0.073	
			Edge 2	23095	707.5	1	24	24.0	24.0	0.357	0.357	0.243	0.243	
						25	12	23.0	23.0	0.289	0.289	0.197	0.197	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	24	24.8	24.8	0.216	0.216	0.171	0.171	
						25	12	23.8	23.8	0.167	0.167	0.132	0.132	
			Left Tilt	23095	707.5	1	24	24.8	24.8	0.138	0.138	0.111	0.111	
						25	12	23.8	23.8	0.115	0.115	0.092	0.092	
			Right Touch	23095	707.5	1	24	24.8	24.8	0.206	0.206	0.164	0.164	
						25	12	23.8	23.8	0.161	0.161	0.127	0.127	
Body-worn & Hotspot	QPSK	5	Rear	23095	707.5	1	24	24.8	24.8	0.458	0.458	0.280	0.280	22
						25	12	23.8	23.8	0.368	0.368	0.224	0.224	
			Front	23095	707.5	1	24	24.8	24.8	0.271	0.271	0.213	0.213	
						25	12	23.8	23.8	0.218	0.218	0.171	0.171	
			Edge 2	23095	707.5	1	24	24.8	24.8	0.405	0.405	0.277	0.277	
						25	12	23.8	23.8	0.326	0.326	0.222	0.222	
Hotspot	QPSK	5	Edge 3	23095	707.5	1	24	24.8	24.8	0.298	0.298	0.143	0.143	
						25	12	23.8	23.8	0.238	0.238	0.114	0.114	
			Edge 4	23095	707.5	1	24	24.8	24.8	0.653	0.653	0.449	0.449	
						25	12	23.8	23.8	0.531	0.531	0.364	0.364	
			Edge 2	23095	707.5	1	24	24.8	24.8	0.405	0.405	0.277	0.277	
						25	12	23.8	23.8	0.326	0.326	0.222	0.222	

10.14. LTE Band 13 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	24	24.0	24.0	0.470	0.470	0.312	0.312	24
						25	12	23.0	23.0	0.383	0.383	0.254	0.254	
			Left Tilt	23230	782.0	1	24	24.0	24.0	0.529	0.529	0.286	0.286	
						25	12	23.0	23.0	0.425	0.425	0.230	0.230	
			Right Touch	23230	782.0	1	24	24.0	24.0	0.533	0.533	0.343	0.343	
						25	12	23.0	23.0	0.431	0.431	0.276	0.276	
Body-worn & Hotspot	QPSK	5	Rear	23230	782.0	1	24	24.0	24.0	0.457	0.457	0.273	0.273	
						25	12	23.0	23.0	0.367	0.367	0.219	0.219	
			Front	23230	782.0	1	24	24.0	24.0	0.268	0.268	0.167	0.167	
						25	12	23.0	23.0	0.217	0.217	0.134	0.134	
			Edge 1	23230	782.0	1	24	24.0	24.0	0.355	0.355	0.167	0.167	
						25	12	23.0	23.0	0.288	0.288	0.136	0.136	
Hotspot	QPSK	5	Edge 2	23230	782.0	1	24	24.0	24.0	0.630	0.630	0.422	0.422	25
						25	12	23.0	23.0	0.507	0.507	0.340	0.340	
			Edge 4	23230	782.0	1	24	24.0	24.0	0.268	0.268	0.179	0.179	
						25	12	23.0	23.0	0.209	0.209	0.139	0.139	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	24	24.8	24.8	0.243	0.243	0.187	0.187	
						25	12	23.8	23.8	0.194	0.194	0.152	0.152	
			Left Tilt	23230	782.0	1	24	24.8	24.8	0.165	0.165	0.129	0.129	
						25	12	23.8	23.8	0.115	0.115	0.090	0.090	
			Right Touch	23230	782.0	1	24	24.8	24.8	0.079	0.079	0.062	0.062	
						25	12	23.8	23.8	0.167	0.167	0.129	0.129	
Body-worn & Hotspot	QPSK	5	Rear	23230	782.0	1	24	24.8	24.8	0.516	0.516	0.307	0.307	26
						25	12	23.8	23.8	0.411	0.411	0.245	0.245	
			Front	23230	782.0	1	24	24.8	24.8	0.370	0.370	0.219	0.219	
						25	12	23.8	23.8	0.275	0.275	0.165	0.165	
			Edge 2	23230	782.0	1	24	24.8	24.8	0.286	0.286	0.191	0.191	
						25	12	23.8	23.8	0.231	0.231	0.154	0.154	
Hotspot	QPSK	5	Edge 3	23230	782.0	1	24	24.8	24.8	0.397	0.397	0.186	0.186	
						25	12	23.8	23.8	0.320	0.320	0.150	0.150	
			Edge 4	23230	782.0	1	24	24.8	24.8	0.570	0.570	0.383	0.383	
						25	12	23.8	23.8	0.460	0.460	0.309	0.309	

10.15. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency range: 704 – 716 MHz) is covered by LTE Band 12 (Frequency range: 699 – 716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.16. LTE Band 25 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26365	1882.5	1	49	19.5	19.5	0.302	0.302	0.163	0.163	
						50	24	19.5	19.5	0.317	0.317	0.170	0.170	
			Left Tilt	26365	1882.5	1	49	19.5	19.5	0.345	0.345	0.174	0.174	
						50	24	19.5	19.5	0.363	0.363	0.180	0.180	
			Right Touch	26140	1860.0	1	49	19.5	19.5	0.782	0.782	0.406	0.406	
						50	24	19.5	19.5	0.803	0.803	0.406	0.406	
				26365	1882.5	1	49	19.5	19.5	0.824	0.824	0.424	0.424	
						50	24	19.5	19.5	0.849	0.849	0.435	0.435	
						100	0	19.5	19.5	0.835	0.835	0.418	0.418	
				26590	1905.0	1	49	19.5	19.5	0.860	0.860	0.428	0.428	
						50	24	19.5	19.5	0.943	0.943	0.468	0.468	27
			Right Tilt	26140	1860.0	1	49	19.5	19.5	0.786	0.786	0.358	0.358	
						50	24	19.5	19.5	0.770	0.770	0.347	0.347	
				26365	1882.5	1	49	19.5	19.5	0.821	0.821	0.374	0.374	
						50	24	19.5	19.5	0.832	0.832	0.371	0.371	
						100	0	19.5	19.5	0.787	0.787	0.358	0.358	
				26590	1905.0	1	49	19.5	19.5	0.917	0.917	0.405	0.405	
						50	24	19.5	19.5	0.866	0.866	0.395	0.395	
Body-worn & Hotspot	QPSK	5	Rear	26365	1882.5	1	49	20.8	20.8	0.716	0.716	0.342	0.342	
						50	24	19.8	19.8	0.622	0.622	0.303	0.303	
			Front	26365	1882.5	1	49	20.8	20.8	0.301	0.301	0.152	0.152	
Hotspot	QPSK	5	Edge 1	26365	1882.5	1	49	20.8	20.8	0.568	0.568	0.235	0.235	
						50	24	19.8	19.8	0.524	0.524	0.214	0.214	
			Edge 2	26365	1882.5	1	49	20.8	20.8	0.054	0.054	0.028	0.028	
						50	24	19.8	19.8	0.053	0.053	0.027	0.027	
			Edge 4	26365	1882.5	1	49	20.8	20.8	0.423	0.423	0.220	0.220	
						50	24	19.8	19.8	0.385	0.385	0.198	0.198	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26365	1882.5	1	49	25.3	25.3	0.477	0.477	0.288	0.288	
						50	24	24.3	24.3	0.462	0.462	0.276	0.276	
			Left Tilt	26365	1882.5	1	49	25.3	25.3	0.211	0.211	0.125	0.125	
						50	24	24.3	24.3	0.170	0.170	0.100	0.100	
			Right Touch	26365	1882.5	1	49	25.3	25.3	0.303	0.303	0.188	0.188	
						50	24	24.3	24.3	0.241	0.241	0.149	0.149	
			Right Tilt	26365	1882.5	1	49	25.3	25.3	0.247	0.247	0.144	0.144	
						50	24	24.3	24.3	0.202	0.202	0.118	0.118	
Body-worn & Hotspot	QPSK	5	Rear	26140	1860.0	1	49	23.3	23.2	0.962	0.984	0.533	0.545	
						50	24	23.3	23.2	0.974	0.997	0.541	0.554	
				26365	1882.5	1	49	23.3	23.2	1.040	1.064	0.535	0.547	
						50	24	23.3	23.3	1.060	1.060	0.542	0.542	
			Front	26590	1905.0	1	49	23.3	23.3	1.070	1.070	0.534	0.534	28
						50	24	23.3	23.3	1.010	1.010	0.498	0.498	
				26365	1882.5	1	49	23.3	23.2	0.407	0.416	0.236	0.241	
						50	24	23.3	23.3	0.425	0.425	0.244	0.244	
Hotspot	QPSK	5	Edge 2	26365	1882.5	1	49	23.3	23.2	0.231	0.236	0.116	0.119	
						50	24	23.3	23.3	0.214	0.214	0.114	0.114	
			Edge 3	26140	1860.0	1	49	23.3	23.2	0.886	0.907	0.441	0.451	
						50	24	23.3	23.2	0.883	0.904	0.439	0.449	
				26365	1882.5	1	49	23.3	23.2	0.981	1.004	0.478	0.489	
						50	24	23.3	23.3	0.979	0.979	0.478	0.478	
				26590	1905.0	100	0	23.3	23.3	1.060	1.060	0.506	0.506	
						1	49	23.3	23.3	1.010	1.010	0.487	0.487	
			Edge 4	26365	1882.5	50	24	23.3	23.3	1.080	1.080	0.514	0.514	29
						1	49	23.3	23.2	0.651	0.666	0.358	0.366	
						50	24	23.3	23.3	0.591	0.591	0.327	0.327	

10.17. LTE Band 26 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	24	24.0	24.0	0.712	0.712	0.432	0.432	30
						25	12	23.0	23.0	0.581	0.581	0.350	0.350	
			Left Tilt	26865	831.5	1	24	24.0	24.0	0.650	0.650	0.330	0.330	
						25	12	23.0	23.0	0.534	0.534	0.270	0.270	
			Right Touch	26865	831.5	1	24	24.0	24.0	0.604	0.604	0.380	0.380	
						25	12	23.0	23.0	0.487	0.487	0.306	0.306	
Body-worn & Hotspot	QPSK	5	Rear	26865	831.5	1	24	24.0	24.0	0.625	0.625	0.338	0.338	31
						25	12	23.0	23.0	0.506	0.506	0.272	0.272	
			Front	26865	831.5	1	24	24.0	24.0	0.462	0.462	0.253	0.253	
						25	12	23.0	23.0	0.370	0.370	0.202	0.202	
			Edge 1	26865	831.5	1	24	24.0	24.0	0.561	0.561	0.253	0.253	
						25	12	23.0	23.0	0.442	0.442	0.199	0.199	
Hotspot	QPSK	5	Edge 2	26865	831.5	1	24	24.0	24.0	0.590	0.590	0.388	0.388	
						25	12	23.0	23.0	0.471	0.471	0.309	0.309	
			Edge 4	26865	831.5	1	24	24.0	24.0	0.177	0.177	0.115	0.115	
						25	12	23.0	23.0	0.143	0.143	0.093	0.093	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	24	24.8	24.8	0.241	0.241	0.188	0.188	
						25	12	23.8	23.8	0.190	0.190	0.149	0.149	
			Left Tilt	26865	831.5	1	24	24.8	24.8	0.140	0.140	0.109	0.109	
						25	12	23.8	23.8	0.112	0.112	0.087	0.087	
			Right Touch	26865	831.5	1	24	24.8	24.8	0.225	0.225	0.172	0.172	
						25	12	23.8	23.8	0.173	0.173	0.133	0.133	
Body-worn & Hotspot	QPSK	5	Right Tilt	26865	831.5	1	24	24.8	24.8	0.131	0.131	0.103	0.103	
						25	12	23.8	23.8	0.106	0.106	0.083	0.083	
			Rear	26865	831.5	1	24	24.8	24.8	0.557	0.557	0.338	0.338	
						25	12	23.8	23.8	0.451	0.451	0.273	0.273	
			Front	26865	831.5	1	24	24.8	24.8	0.278	0.278	0.158	0.158	
						25	12	23.8	23.8	0.222	0.222	0.127	0.127	
Hotspot	QPSK	5	Edge 2	26865	831.5	1	24	24.8	24.8	0.325	0.325	0.212	0.212	
						25	12	23.8	23.8	0.258	0.258	0.168	0.168	
			Edge 3	26865	831.5	1	24	24.8	24.8	0.324	0.324	0.144	0.144	
						25	12	23.8	23.8	0.263	0.263	0.116	0.116	
			Edge 4	26865	831.5	1	24	24.8	24.8	0.646	0.646	0.422	0.422	32
						25	12	23.8	23.8	0.492	0.492	0.321	0.321	

10.18. LTE Band 30 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	27710	2310.0	1	24	20.0	20.0	0.621	0.621	0.261	0.261	
						25	12	20.0	20.0	0.627	0.627	0.262	0.262	
			Left Tilt	27710	2310.0	1	24	20.0	20.0	0.637	0.637	0.244	0.244	
						25	12	20.0	20.0	0.649	0.649	0.247	0.247	
			Right Touch	27710	2310.0	1	24	20.0	20.0	0.953	0.953	0.387	0.387	
						25	12	20.0	20.0	0.959	0.959	0.388	0.388	
						50	0	20.0	20.0	0.971	0.971	0.393	0.393	
			Right Tilt	27710	2310.0	1	24	20.0	20.0	0.985	0.985	0.370	0.370	
						25	12	20.0	20.0	0.990	0.990	0.371	0.371	
						50	0	20.0	20.0	1.010	1.010	0.389	0.389	33
Body-worn & Hotspot	QPSK	5	Rear	27710	2310.0	1	24	20.0	20.0	0.800	0.800	0.318	0.318	
						25	12	20.0	20.0	0.810	0.810	0.322	0.322	
						50	0	20.0	20.0	0.836	0.836	0.332	0.332	
			Front	27710	2310.0	1	24	20.0	20.0	0.424	0.424	0.176	0.176	
						25	12	20.0	20.0	0.426	0.426	0.176	0.176	
						50	0	20.0	20.0	0.426	0.426	0.176	0.176	
Hotspot	QPSK	5	Edge 1	27710	2310.0	1	24	20.0	20.0	0.518	0.518	0.177	0.177	
						25	12	20.0	20.0	0.525	0.525	0.179	0.179	
			Edge 2	27710	2310.0	1	24	20.0	20.0	0.334	0.334	0.138	0.138	
						25	12	20.0	20.0	0.336	0.336	0.139	0.139	
			Edge 4	27710	2310.0	1	24	20.0	20.0	0.423	0.423	0.194	0.194	
						25	12	20.0	20.0	0.431	0.431	0.197	0.197	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	27710	2310.0	1	24	23.8	23.8	0.164	0.164	0.096	0.096	
						25	12	22.8	22.8	0.134	0.134	0.080	0.080	
			Left Tilt	27710	2310.0	1	24	23.8	23.8	0.159	0.159	0.076	0.076	
						25	12	22.8	22.8	0.119	0.119	0.056	0.056	
			Right Touch	27710	2310.0	1	24	23.8	23.8	0.351	0.351	0.198	0.198	
						25	12	22.8	22.8	0.290	0.290	0.163	0.163	
			Right Tilt	27710	2310.0	1	24	23.8	23.8	0.192	0.192	0.096	0.096	
						25	12	22.8	22.8	0.147	0.147	0.073	0.073	
Body-worn & Hotspot	QPSK	5	Rear	27710	2310.0	1	24	22.0	22.0	0.954	0.954	0.399	0.399	
						25	12	22.0	22.0	0.960	0.960	0.399	0.399	
						50	0	22.0	22.0	0.975	0.975	0.407	0.407	34
			Front	27710	2310.0	1	24	22.0	22.0	0.524	0.524	0.234	0.234	
						25	12	22.0	22.0	0.462	0.462	0.202	0.202	
						50	0	22.0	22.0	0.462	0.462	0.202	0.202	
Hotspot	QPSK	5	Edge 2	27710	2310.0	1	24	22.0	22.0	0.452	0.452	0.203	0.203	
						25	12	22.0	22.0	0.427	0.427	0.200	0.200	
			Edge 3	27710	2310.0	1	24	22.0	22.0	0.615	0.615	0.218	0.218	
						25	12	22.0	22.0	0.657	0.657	0.230	0.230	
			Edge 4	27710	2310.0	1	24	22.0	22.0	0.232	0.232	0.106	0.106	
						25	12	22.0	22.0	0.197	0.197	0.093	0.093	

10.19. LTE Band 41 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	39750	2506.0	1	49	21.3	21.2	1.010	1.034	0.391	0.400	35
						50	24	20.4	20.2	0.889	0.931	0.341	0.357	
				40185	2549.5	1	49	21.3	21.2	0.935	0.957	0.355	0.363	
						50	24	20.4	20.3	0.791	0.809	0.297	0.304	
				40620	2593.0	1	49	21.3	21.2	0.795	0.814	0.298	0.305	
						50	24	20.4	20.4	0.746	0.746	0.277	0.277	
						100	0	20.4	20.3	0.679	0.695	0.253	0.259	
			41055	2636.5		1	49	21.3	21.3	0.744	0.744	0.275	0.275	
						50	24	20.4	20.4	0.645	0.645	0.238	0.238	
						1	49	21.3	21.3	0.605	0.605	0.221	0.221	
			41490	2680.0		50	24	20.4	20.3	0.529	0.541	0.191	0.195	
			Left Tilt	40620	2593.0	1	49	21.3	21.2	0.436	0.446	0.180	0.184	
						50	24	20.4	20.4	0.380	0.380	0.158	0.158	
			Right Touch	40620	2593.0	1	49	21.3	21.2	0.203	0.208	0.096	0.098	
						50	24	20.4	20.4	0.202	0.202	0.091	0.091	
			Right Tilt	40620	2593.0	1	49	21.3	21.2	0.252	0.258	0.110	0.113	
						50	24	20.4	20.4	0.227	0.227	0.097	0.097	
Body-worn & Hotspot	QPSK	5	Rear	40620	2593.0	1	49	21.4	21.4	0.485	0.485	0.195	0.195	
						50	24	20.4	20.4	0.389	0.389	0.155	0.155	
			Front	40620	2593.0	1	49	21.4	21.4	0.255	0.255	0.111	0.111	
						50	24	20.4	20.4	0.204	0.204	0.088	0.088	
Hotspot	QPSK	5	Edge 1	40620	2593.0	1	49	21.4	21.4	0.247	0.247	0.102	0.102	
						50	24	20.4	20.4	0.199	0.199	0.082	0.082	
			Edge 2	40620	2593.0	1	49	21.4	21.4	0.210	0.210	0.096	0.096	
						50	24	20.4	20.4	0.166	0.166	0.076	0.076	
			Edge 4	40620	2593.0	1	49	21.4	21.4	0.099	0.099	0.043	0.043	
						50	24	20.4	20.4	0.079	0.079	0.034	0.034	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	49	25.3	25.3	0.358	0.358	0.179	0.179	
						50	24	24.3	24.3	0.318	0.318	0.159	0.159	
			Left Tilt	40620	2593.0	1	49	25.3	25.3	0.096	0.096	0.048	0.048	
						50	24	24.3	24.3	0.086	0.086	0.043	0.043	
			Right Touch	40620	2593.0	1	49	25.3	25.3	0.144	0.144	0.076	0.076	
						50	24	24.3	24.3	0.131	0.131	0.069	0.069	
			Right Tilt	40620	2593.0	1	49	25.3	25.3	0.164	0.164	0.077	0.077	
						50	24	24.3	24.3	0.147	0.147	0.069	0.069	
Body-worn & Hotspot	QPSK	5	Rear	39750	2506.0	1	49	23.3	23.3	0.668	0.668	0.270	0.270	
				40185	2549.5	1	49	23.3	23.2	0.869	0.889	0.346	0.354	
				40620	2593.0	1	49	23.3	23.1	0.766	0.802	0.310	0.325	
						50	24	23.3	23.3	0.663	0.663	0.271	0.271	
				41055	2636.5	1	49	23.3	23.3	0.936	0.936	0.362	0.362	36
				41490	2680.0	1	49	23.3	23.3	0.893	0.893	0.347	0.347	
			Front	40620	2593.0	1	49	23.3	23.1	0.667	0.698	0.269	0.282	
						50	24	23.3	23.3	0.751	0.751	0.297	0.297	
Hotspot	QPSK	5	Edge 2	40620	2593.0	1	49	23.3	23.1	0.174	0.182	0.079	0.083	
						50	24	23.3	23.3	0.134	0.134	0.062	0.062	
			Edge 3	40620	2593.0	1	49	23.3	23.1	0.738	0.773	0.254	0.266	
						50	24	23.3	23.3	0.630	0.630	0.216	0.216	
			Edge 4	40620	2593.0	1	49	23.3	23.1	0.549	0.575	0.241	0.252	
						50	24	23.3	23.3	0.506	0.506	0.222	0.222	

10.20. LTE Band 66 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	132322	1745.0	1	49	21.8	21.8	0.462	0.462	0.272	0.272	37
						50	24	21.2	21.2	0.383	0.383	0.225	0.225	
			Left Tilt	132322	1745.0	1	49	21.8	21.8	0.397	0.397	0.239	0.239	
						50	24	21.2	21.2	0.337	0.337	0.203	0.203	
			Right Touch	132072	1720.0	1	49	21.8	21.8	0.967	0.967	0.541	0.541	
				132322	1745.0	1	49	21.8	21.8	1.070	1.070	0.605	0.605	
						50	24	21.2	21.2	0.796	0.796	0.455	0.455	
				132572	1770.0	1	49	21.8	21.6	0.837	0.876	0.461	0.483	
			Right Tilt	132072	1720.0	1	49	21.8	21.8	0.822	0.822	0.419	0.419	
				132322	1745.0	1	49	21.8	21.8	0.893	0.893	0.454	0.454	
						50	24	21.2	21.2	0.710	0.710	0.369	0.369	
				132572	1770.0	1	49	21.8	21.6	0.783	0.820	0.379	0.397	
Body-worn & Hotspot	QPSK	5	Rear	132072	1720.0	1	49	22.2	22.2	0.893	0.893	0.448	0.448	
				132322	1745.0	1	49	22.2	22.2	0.849	0.849	0.423	0.423	
						50	24	21.2	21.2	0.686	0.686	0.343	0.343	
				132572	1770.0	1	49	22.2	22.2	0.846	0.846	0.422	0.422	
			Front	132322	1745.0	1	49	22.2	22.2	0.403	0.403	0.219	0.219	
						50	24	21.2	21.2	0.317	0.317	0.172	0.172	
Hotspot	QPSK	5	Edge 1	132322	1745.0	1	49	22.2	22.2	0.763	0.763	0.340	0.340	
						50	24	21.2	21.2	0.581	0.581	0.259	0.259	
			Edge 2	132322	1745.0	1	49	22.2	22.2	0.065	0.065	0.037	0.037	
						50	24	21.2	21.2	0.052	0.052	0.030	0.030	
			Edge 4	132322	1745.0	1	49	22.2	22.2	0.636	0.636	0.348	0.348	
						50	24	21.2	21.2	0.520	0.520	0.283	0.283	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.			
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled				
Head	QPSK	0	Left Touch	132322	1745.0	1	49	25.3	25.3	0.464	0.464	0.297	0.297				
						50	24	24.3	24.3	0.371	0.371	0.237	0.237				
			Left Tilt	132322	1745.0	1	49	25.3	25.3	0.215	0.215	0.138	0.138				
						50	24	24.3	24.3	0.170	0.170	0.110	0.110				
			Right Touch	132322	1745.0	1	49	25.3	25.3	0.229	0.229	0.155	0.155				
						50	24	24.3	24.3	0.183	0.183	0.124	0.124				
			Right Tilt	132322	1745.0	1	49	25.3	25.3	0.234	0.234	0.146	0.146				
						50	24	24.3	24.3	0.184	0.184	0.116	0.116				
			Body-worn & Hotspot	QPSK	5	Rear	132072	1720.0	1	49	24.5	24.5	0.901	0.901	0.501	0.501	
									50	24	24.3	24.2	0.849	0.869	0.463	0.474	
132322	1745.0	1					49	24.5	24.5	0.861	0.861	0.488	0.488				
		50					24	24.3	24.2	0.891	0.912	0.513	0.525				
		100					0	24.3	24.2	1.040	1.064	0.578	0.591	38			
		1					49	24.5	24.5	0.979	0.979	0.553	0.553				
132572	1770.0	50				24	24.3	24.2	1.010	1.034	0.559	0.572					
		1				49	24.5	24.5	0.643	0.643	0.417	0.417					
Front	132322	1745.0				50	24	24.3	24.2	0.446	0.456	0.293	0.300				
						1	49	24.5	24.5	0.126	0.126	0.071	0.071				
Hotspot	QPSK	5				Edge 2	132322	1745.0	1	49	24.5	24.5	0.108	0.111	0.061	0.062	
									50	24	24.3	24.2	0.500	0.512	0.226	0.231	
			Edge 3	132322	1745.0	1	49	24.5	24.5	0.640	0.640	0.368	0.368				
						50	24	24.3	24.2	0.614	0.628	0.352	0.360				
			Edge 4	132322	1745.0	1	49	24.5	24.5	0.126	0.126	0.071	0.071				
						50	24	24.3	24.2	0.446	0.456	0.293	0.300				

10.21. LTE-uplink 2CA Band 7 (20MHz + 20MHz BW)

SAR Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

RF Exposure Conditions	Power Mode	Mode	Antenna	Dist. (mm)	Test Position	PCC				SCC				Power (dBm)			1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	MPR	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	A	QPSK	UAT	0	Left Touch	20850	2510.0	1	99	21048	2529.8	1	0	0	19.8	19.8	0.786	0.786	0.312	0.312	
Body	B	QPSK	LAT	5	Rear	21350	2560.0	1	0	21152	2540.2	1	99	0	22.0	22.0	0.813	0.813	0.325	0.325	39

Notes:

- From FCC PAG Guidance and Manufacturer KDB inquiry - Carrier Aggregation: PCC channel was determined and selected closest to the worst case SAR configuration from standalone reported SAR result. PCC and SCC channels were determined and selected to allow contiguous CA. RB allocations and offsets were selected to allow maximum measured output power. Output power was measured and verified for these test cases.

10.22. LTE-uplink 2CA Band 41 (20MHz + 20MHz BW)

SAR Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

RF Exposure Conditions	Power Mode	Mode	Antenna	Dist. (mm)	Test Position	PCC				SCC				Power (dBm)			1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	MPR	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	A	QPSK	UAT	0	Left Touch	39750	2506.0	1	99	39948	2525.8	1	0	0	19.3	19.2	0.554	0.567	0.216	0.221	
Body	B	QPSK	LAT	5	Rear	41055	2636.5	1	99	41253	2656.3	1	0	0	23.3	23.3	0.799	0.799	0.306	0.306	40

Notes:

- From FCC PAG Guidance and Manufacturer KDB inquiry - Carrier Aggregation: PCC channel was determined and selected closest to the worst case SAR configuration from standalone reported SAR result. PCC and SCC channels were determined and selected to allow contiguous CA. RB allocations and offsets were selected to allow maximum measured output power. Output power was measured and verified for these test cases.

10.23. Wi-Fi (DTS Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 1 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 1		LAT 3			UAT 1				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
2.4 GHz	Head	802.11b 20MHz	0	1 Tx	Left Touch	6	2437	13.0	13.0			0.510	0.322	0.125	0.322	0.125					
					Left Tilt	6	2437	13.0	13.0			0.411									
					Right Touch	6	2437	13.0	13.0			0.313									
					Right Tilt	6	2437	13.0	13.0			0.460									
					Left Touch	6	2437			22.0	22.0	0.318					0.249	0.132	0.249	0.132	
					Left Tilt	6	2437			22.0	22.0	0.095									
					Right Touch	6	2437			22.0	22.0	0.158									
					Right Tilt	6	2437			22.0	22.0	0.140									
		802.11g 20MHz	0	2 Tx	Left Touch	6	2437	13.0	13.0	21.5	21.5	0.547	0.310	0.125	0.310	0.125	0.163	0.084	0.163	0.084	
					Left Tilt	6	2437	13.0	13.0	21.5	21.5	0.418									
					Right Touch	6	2437	13.0	13.0	21.5	21.5	0.400									
					Right Tilt	6	2437	13.0	13.0	21.5	21.5	0.382									
	Body-worn & Hotspot	802.11b 20MHz	5	1 Tx	Rear	6	2437	15.5	15.5			0.549	0.413	0.168	0.413	0.168					
					Front	6	2437	15.5	15.5			0.358									
					Edge 1	6	2437	15.5	15.5			0.463									
					Edge 2	6	2437	15.5	15.5			0.467	0.474	0.196	0.474	0.196					
					Edge 4	6	2437	15.5	15.5			0.150									
					Rear	6	2437			15.5	15.5	0.395					0.334	0.157	0.334	0.157	
					Front	6	2437			15.5	15.5	0.179									
					Edge 2	6	2437			15.5	15.5	0.005									
					Edge 3	6	2437			15.5	15.5	0.081									
					Edge 4	6	2437			15.5	15.5	0.258									
		802.11g 20MHz	5	2 Tx	Rear	6	2437	15.5	15.5	15.5	15.5	0.760	0.540	0.199	0.540	0.199	0.319	0.147	0.319	0.147	
					Front	6	2437	15.5	15.5	15.5	15.5	0.122									
					Edge 1	6	2437	15.5	15.5	15.5	15.5	0.242									
					Edge 2	6	2437	15.5	15.5	15.5	15.5	0.279	0.487	0.198	0.487	0.198	0.188	0.088	0.188	0.088	
					Edge 3	6	2437	15.5	15.5	15.5	15.5	0.048									
					Edge 4	6	2437	15.5	15.5	15.5	15.5	0.265									

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Pow er (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots	
								UAT 1		LAT 3			UAT 1				LAT 3					
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled			
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g		
2.4 GHz	Head	802.11b 20MHz	0	1 Tx	Left Touch	6	2437	18.3	18.2			1.460	0.988	0.389	1.011	0.398					41	
						11	2462	18.3	18.3			1.600	1.120	0.431	1.120	0.431						
					Left Tilt	6	2437	18.3	18.2			1.090	0.780	0.299	0.798	0.306						
					Right Touch	6	2437	18.3	18.2			0.537										
					Right Tilt	6	2437	18.3	18.2			0.819										
					Left Touch	6	2437			22.0	22.0	0.240					0.217	0.103	0.217	0.103		
					Left Tilt	6	2437			22.0	22.0	0.070										
					Right Touch	6	2437			22.0	22.0	0.096										
		Right Tilt	6	2437			22.0	22.0	0.110													
		802.11g 20MHz	0	2 Tx	Left Touch	6	2437	18.3	18.3	21.5	21.5	1.470	0.976	0.393	0.976	0.393	0.253	0.137	0.253	0.137		
						8	2447	18.3	18.3	21.5	21.5	1.260	0.973	0.389	0.973	0.389	0.232	0.125	0.232	0.125		
					Left Tilt	6	2437	18.3	18.3	21.5	21.5	0.894	0.664	0.263	0.664	0.263	-	-	-	-		
					Right Touch	6	2437	18.3	18.3	21.5	21.5	0.630										
					Right Tilt	6	2437	18.3	18.3	21.5	21.5	0.851	0.519	0.207	0.519	0.207	-	-	-	-		
	Body-worn & Hotspot	802.11b 20MHz	5	1 Tx	Rear	6	2437	18.8	18.8			1.030	1.060	0.433	1.060	0.433					42	
						11	2462	18.8	18.8			1.470	0.964	0.418	0.964	0.418						
					Front	6	2437	18.8	18.8			0.785										
					Edge 1	6	2437	18.8	18.8			0.961	0.620	0.225	0.620	0.225						
					Edge 2	6	2437	18.8	18.8			1.230	0.988	0.394	0.988	0.394						
						11	2462	18.8	18.8			1.150	1.130	0.461	1.130	0.461						
					Edge 4	6	2437	18.8	18.8			0.446										
					Rear	6	2437			20.8	20.8	1.490					1.100	0.529	1.100	0.529		
						11	2462			20.8	20.8	1.250					1.020	0.467	1.020	0.467		
					Front	6	2437			20.8	20.8	0.455										
					Edge 2	6	2437			20.8	20.8	0.019										
					Edge 3	6	2437			20.8	20.8	0.081										
					Edge 4	6	2437			20.8	20.8	0.604					0.503	0.238	0.503	0.238		
		802.11g 20MHz	5	2 Tx	Rear	6	2437	18.8	18.8	20.8	20.8	1.860	0.811	0.343	0.811	0.343	0.674	0.292	0.674	0.292		
						8	2447	18.8	18.8	20.8	20.8	1.490	0.744	0.291	0.744	0.291	0.710	0.312	0.710	0.312		
					Front	6	2437	18.8	18.8	20.8	20.8	0.855	0.411	0.185	0.411	0.185	0.324	0.141	0.324	0.141		
					Edge 1	6	2437	18.8	18.8	20.8	20.8	1.340	1.000	0.351	1.000	0.351						
						8	2447	18.8	18.8	20.8	20.8	0.983	0.835	0.293	0.835	0.293						
					Edge 2	6	2437	18.8	18.8	20.8	20.8	0.501										
					Edge 3	6	2437	18.8	18.8	20.8	20.8	0.186										
Edge 4					6	2437	18.8	18.8	20.8	20.8	0.530											

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.24. Wi-Fi (U-NII-1 and U-NII-2A Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.3 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	58	5290	15.0	15.0			0.155									
					Left Tilt	58	5290	15.0	15.0			0.182									
					Right Touch	58	5290	15.0	15.0			0.409	0.184	0.053	0.184	0.053					
					Right Tilt	58	5290	15.0	15.0			0.320									
5.3 GHz		802.11a	0	1 Tx	Left Touch	60	5300			21.0	21.0	0.081					0.041	0.020	0.041	0.020	
					Left Tilt	60	5300			21.0	21.0	0.042									
					Right Touch	60	5300			21.0	21.0	0.072									
					Right Tilt	60	5300			21.0	21.0	0.030									
5.3 GHz		802.11n HT40	0	2 Tx	Left Touch	54	5270	15.0	15.0	19.5	19.5	0.178									
					Left Tilt	54	5270	15.0	15.0	19.5	19.5	0.166									
					Right Touch	54	5270	15.0	15.0	19.5	19.5	0.335									
					Right Tilt	54	5270	15.0	15.0	19.5	19.5	0.378	0.199	0.069	0.199	0.069	-	-	-	-	
5.3 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	58	5290	11.0	11.0			0.868	0.400	0.101	0.400	0.101					
					Front	58	5290	11.0	11.0			0.075									
					Edge 1	58	5290	11.0	11.0			0.078									
					Edge 2	58	5290	11.0	11.0			0.026									
					Edge 4	58	5290	11.0	11.0			0.142	0.072	0.028	0.072	0.028					
5.3 GHz		802.11ac VHT80	5	1 Tx	Rear	58	5290			11.3	11.3	0.422					0.213	0.065	0.213	0.065	
					Front	58	5290			11.3	11.3	0.078									
					Edge 2	58	5290			11.3	11.3	0.025									
					Edge 3	58	5290			11.3	11.3	0.078									
					Edge 4	58	5290			11.3	11.3	0.053									
5.3 GHz		802.11ac VHT80	5	2 Tx	Rear	58	5290	11.0	11.0	11.3	11.3	0.475	0.199	0.050	0.199	0.050	0.084	0.022	0.084	0.022	
					Front	58	5290	11.0	11.0	11.3	11.3	0.039									
					Edge 1	58	5290	11.0	11.0	11.3	11.3	0.036									
					Edge 2	58	5290	11.0	11.0	11.3	11.3	0.024									
					Edge 3	58	5290	11.0	11.0	11.3	11.3	0.039									
					Edge 4	58	5290	11.0	11.0	11.3	11.3	0.060									

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots	
								UAT 2		LAT 3			UAT 2				LAT 3					
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled			
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g		
5.3 GHz	Head	802.11a	0	1 Tx	Left Touch	60	5300	21.0	21.0			0.319									43	
					Left Tilt	60	5300	21.0	21.0			0.395										
					Right Touch	60	5300	21.0	21.0			1.210	0.618	0.205	0.618	0.205						
					Right Tilt	60	5300	21.0	21.0			1.160	0.587	0.187	0.587	0.187						
5.3 GHz		802.11a	0	1 Tx	Left Touch	60	5300			21.0	21.0	0.081					0.041	0.020	0.041	0.020		
					Left Tilt	60	5300			21.0	21.0	0.042										
					Right Touch	60	5300			21.0	21.0	0.072										
					Right Tilt	60	5300			21.0	21.0	0.030										
5.3 GHz		802.11n HT40	0	2 Tx	Left Touch	54	5270	19.5	19.5	19.5	19.5	0.407										
					Left Tilt	54	5270	19.5	19.5	19.5	19.5	0.386										
					Right Touch	54	5270	19.5	19.5	19.5	19.5	0.772	0.407	0.145	0.407	0.145	-	-	-	-		
					Right Tilt	54	5270	19.5	19.5	19.5	19.5	0.737	0.389	0.131	0.389	0.131	-	-	-	-		
5.3 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	58	5290	15.3	15.3			1.930	1.160	0.307	1.160	0.307					44	
					Front	58	5290	15.3	15.3			0.140										
					Edge 1	58	5290	15.3	15.3			0.158										
					Edge 2	58	5290	15.3	15.3			0.033										
					Edge 4	58	5290	15.3	15.3			0.301	0.145	0.048	0.145	0.048						
5.3 GHz		802.11n HT40	5	1 Tx	Rear	54	5270			18.0	18.0	1.810					1.120	0.324	1.120	0.324		
						62	5310			18.0	18.0	1.970					1.160	0.342	1.160	0.342		
					Front	62	5310			18.0	18.0	0.243										
					Edge 2	62	5310			18.0	18.0	0.057										
					Edge 3	62	5310			18.0	18.0	0.346					0.198	0.078	0.198	0.078		
5.3 GHz		802.11n HT40	5	2 Tx	Edge 4	62	5310			18.0	18.0	0.216										
					Rear	54	5270	15.3	15.3	18.0	17.9	2.280	1.140	0.304	1.140	0.304	1.030	0.286	1.054	0.293		
						62	5310	15.3	15.3	17.0	17.0	2.840	1.150	0.311	1.150	0.311	0.736	0.210	0.736	0.210		
					Front	54	5270	15.3	15.3	18.0	17.9	0.130										
					Edge 1	54	5270	15.3	15.3	18.0	17.9	0.120										
					Edge 2	54	5270	15.3	15.3	18.0	17.9	0.049										
						Edge 3	54	5270	15.3	15.3	18.0	17.9	0.254									
						Edge 4	54	5270	15.3	15.3	18.0	17.9	0.321	0.175	0.068	0.175	0.068	0.085	0.027	0.087	0.028	

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.25. Wi-Fi (U-NII-2C Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.5 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	122	5610	16.0	16.0			0.133									
					Left Tilt	122	5610	16.0	16.0			0.150									
					Right Touch	122	5610	16.0	16.0			0.275	0.176	0.054	0.176	0.054					
					Right Tilt	122	5610	16.0	16.0			0.192									
		802.11a	0	1 Tx	Left Touch	120	5600			21.0	21.0	0.038					0.031	0.013	0.031	0.013	
					Left Tilt	120	5600			21.0	21.0	0.016									
					Right Touch	120	5600			21.0	21.0	0.027									
					Right Tilt	120	5600			21.0	21.0	0.013									
		802.11ac VHT80	0	2 Tx	Left Touch	122	5610	16.0	16.0	19.5	19.5	0.122									
					Left Tilt	122	5610	16.0	16.0	19.5	19.5	0.141									
					Right Touch	122	5610	16.0	16.0	19.5	19.5	0.170	0.104	0.029	0.104	0.029	-	-	-	-	
					Right Tilt	122	5610	16.0	16.0	19.5	19.5	0.123									
5.5 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	122	5610	10.5	10.5			0.649	0.359	0.090	0.359	0.090					
					Front	122	5610	10.5	10.5			0.059									
					Edge 1	122	5610	10.5	10.5			0.074									
					Edge 2	122	5610	10.5	10.5			0.018									
					Edge 4	122	5610	10.5	10.5			0.110	0.053	0.017	0.053	0.017					
		802.11ac VHT80	5	1 Tx	Rear	122	5610			12.5	12.5	0.291					0.196	0.052	0.196	0.052	
					Front	122	5610			12.5	12.5	0.094									
					Edge 2	122	5610			12.5	12.5	0.015									
					Edge 3	122	5610			12.5	12.5	0.097									
					Edge 4	122	5610			12.5	12.5	0.021									
		802.11ac VHT80	5	2 Tx	Rear	122	5610	10.5	10.3	12.5	12.3	0.844	0.360	0.087	0.377	0.091	0.143	0.040	0.150	0.042	
					Front	122	5610	10.5	10.3	12.5	12.3	0.038									
					Edge 1	122	5610	10.5	10.3	12.5	12.3	0.045									
					Edge 2	122	5610	10.5	10.3	12.5	12.3	0.016									
					Edge 3	122	5610	10.5	10.3	12.5	12.3	0.062									
					Edge 4	122	5610	10.5	10.3	12.5	12.3	0.079	0.044	0.015	0.046	0.016	-	-	-	-	

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.5 GHz	Head	802.11a	0	1 Tx	Left Touch	120	5600	21.0	21.0			0.387									
					Left Tilt	120	5600	21.0	21.0			0.388									
					Right Touch	120	5600	21.0	21.0			0.619	0.387	0.127	0.387	0.127					
					Right Tilt	104	5520	21.0	21.0			0.727	0.451	0.138	0.451	0.138					45
			120	5600	21.0	21.0			0.944	0.443	0.131	0.443	0.131								
		802.11a	0	1 Tx	Left Touch	120	5600			21.0	21.0	0.038					0.031	0.013	0.031	0.013	
					Left Tilt	120	5600			21.0	21.0	0.016									
					Right Touch	120	5600			21.0	21.0	0.027									
					Right Tilt	120	5600			21.0	21.0	0.013									
		802.11ac VHT80	0	2 Tx	Left Touch	122	5610	19.5	19.5	19.5	19.5	0.283									
					Left Tilt	122	5610	19.5	19.5	19.5	19.5	0.265									
					Right Touch	122	5610	19.5	19.5	19.5	19.5	0.728	0.403	0.129	0.403	0.129	-	-	-	-	
Right Tilt	122				5610	19.5	19.5	19.5	19.5	0.698	0.434	0.133	0.434	0.133	-	-	-	-			
5.5 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	122	5610	14.8	14.8			1.850	1.140	0.296	1.140	0.296					
						138	5690	14.8	14.8			1.680	0.890	0.232	0.890	0.232					
					Front	122	5610	14.8	14.8			0.166									
					Edge 1	122	5610	14.8	14.8			0.224									
					Edge 2	122	5610	14.8	14.8			0.019									
			122	5610	14.8	14.8			0.303	0.167	0.055	0.167	0.055								
		802.11ac VHT80	5	1 Tx	Rear	122	5610			19.3	19.3	1.640					1.090	0.318	1.090	0.318	
						138	5690			19.3	19.3	1.670					1.190	0.323	1.190	0.323	46
					Front	122	5610			19.3	19.3	0.385									
					Edge 2	122	5610			19.3	19.3	0.008									
					Edge 3	122	5610			19.3	19.3	0.447					0.220	0.075	0.220	0.075	
			122	5610			19.3	19.3	0.122												
		802.11ac VHT80	5	2 Tx	Rear	122	5610	14.8	14.8	19.3	19.3	1.690	0.862	0.216	0.862	0.216	0.551	0.146	0.551	0.146	
						138	5690	14.8	14.8	19.3	19.3	1.950	1.170	0.302	1.170	0.302	1.170	0.334	1.170	0.334	
					Front	122	5610	14.8	14.8	19.3	19.3	0.177									
					Edge 1	122	5610	14.8	14.8	19.3	19.3	0.098									
Edge 2	122				5610	14.8	14.8	19.3	19.3	0.013											
Edge 3	122				5610	14.8	14.8	19.3	19.3	0.203	-	-	-	-	0.099	0.032	0.099	0.032			
Edge 4	122				5610	14.8	14.8	19.3	19.3	0.173											

Notes:

For SAR results with "-", there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.26. Wi-Fi (U-NII-3 Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.8 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	155	5775	16.0	16.0			0.184									
					Left Tilt	155	5775	16.0	16.0			0.154									
					Right Touch	155	5775	16.0	16.0			0.262	0.135	0.043	0.135	0.043					
					Right Tilt	155	5775	16.0	16.0			0.258									
		802.11a	0	1 Tx	Left Touch	157	5785			21.5	21.5	0.063					0.029	0.010	0.029	0.010	
					Left Tilt	157	5785			21.5	21.5	0.030									
					Right Touch	157	5785			21.5	21.5	0.022									
					Right Tilt	157	5785			21.5	21.5	0.031									
		802.11a	0	2 Tx	Left Touch	157	5785	16.0	16.0	21.5	21.5	0.117									
					Left Tilt	157	5785	16.0	16.0	21.5	21.5	0.180									
					Right Touch	157	5785	16.0	16.0	21.5	21.5	0.248	0.153	0.047	0.153	0.047	-	-	-	-	
					Right Tilt	157	5785	16.0	16.0	21.5	21.5	0.219									
5.8 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	155	5775	10.5	10.5			0.741	0.361	0.097	0.361	0.097					
					Front	155	5775	10.5	10.5			0.051									
					Edge 1	155	5775	10.5	10.5			0.100									
					Edge 2	155	5775	10.5	10.5			0.018									
					Edge 4	155	5775	10.5	10.5			0.148									
		802.11ac VHT80	5	1 Tx	Rear	155	5775			12.0	12.0	0.387					0.196	0.049	0.196	0.049	
					Front	155	5775			12.0	12.0	0.040									
					Edge 2	155	5775			12.0	12.0	0.021									
					Edge 3	155	5775			12.0	12.0	0.079									
					Edge 4	155	5775			12.0	12.0	0.028									
		802.11ac VHT80	5	2 Tx	Rear	155	5775	10.5	10.5	12.0	12.0	0.598	0.377	0.093	0.377	0.093	0.170	0.044	0.170	0.044	
					Front	155	5775	10.5	10.5	12.0	12.0	0.044									
					Edge 1	155	5775	10.5	10.5	12.0	12.0	0.079									
					Edge 2	155	5775	10.5	10.5	12.0	12.0	0.019									
					Edge 3	155	5775	10.5	10.5	12.0	12.0	0.082									
					Edge 4	155	5775	10.5	10.5	12.0	12.0	0.093									

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.8 GHz	Head	802.11a	0	1 Tx	Left Touch	157	5785	21.0	20.1			0.364									
					Left Tilt	157	5785	21.0	20.1			0.432									
					Right Touch	157	5785	21.0	20.1			0.791	0.451	0.145	0.555	0.178					
					Right Tilt	157	5785	21.0	20.1			0.754	0.460	0.149	0.566	0.183				47	
		802.11a	0	1 Tx	Left Touch	157	5785			21.5	21.5	0.063					0.029	0.010	0.029	0.010	
					Left Tilt	157	5785			21.5	21.5	0.030									
					Right Touch	157	5785			21.5	21.5	0.022									
					Right Tilt	157	5785			21.5	21.5	0.031									
		802.11a	0	2 Tx	Left Touch	157	5785	21.0	21.0	21.5	21.5	0.244									
					Left Tilt	157	5785	21.0	21.0	21.5	21.5	0.362									
					Right Touch	157	5785	21.0	21.0	21.5	21.5	0.342									
					Right Tilt	157	5785	21.0	21.0	21.5	21.5	0.430	0.239	0.084	0.239	0.084	-	-	-	-	
5.8 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	155	5775	14.8	14.6			1.740	1.030	0.272	1.079	0.285					
					Front	155	5775	14.8	14.6			0.104									
					Edge 1	155	5775	14.8	14.6			0.239									
					Edge 2	155	5775	14.8	14.6			0.041									
					Edge 4	155	5775	14.8	14.6			0.398	0.250	0.084	0.262	0.088					
		802.11ac VHT80	5	1 Tx	Rear	155	5775			18.8	18.8	2.350					1.080	0.319	1.080	0.319	
					Front	155	5775			18.8	18.8	0.302									
					Edge 2	155	5775			18.8	18.8	0.057									
					Edge 3	155	5775			18.8	18.8	0.712					0.380	0.140	0.380	0.140	
					Edge 4	155	5775			18.8	18.8	0.163									
		802.11ac VHT80	5	2 Tx	Rear	155	5775	14.8	14.8	18.8	18.8	2.640	1.130	0.314	1.130	0.314	1.180	0.352	1.180	0.352	48
					Front	155	5775	14.8	14.8	18.8	18.8	0.264									
					Edge 1	155	5775	14.8	14.8	18.8	18.8	0.173									
					Edge 2	155	5775	14.8	14.8	18.8	18.8	0.018									
					Edge 3	155	5775	14.8	14.8	18.8	18.8	0.419									
					Edge 4	155	5775	14.8	14.8	18.8	18.8	0.423	0.221	0.071	0.221	0.071	0.091	0.036	0.091	0.036	

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.27. Wi-Fi Variant 2 Spot Check

SAR Testing (Spot Check) was performed based on the worst case SAR result from Sec. 10.23 – Sec. 10.26. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Wi-Fi (DTS Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 1		LAT 3		UAT 1				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	2.4 GHz	Head	802.11b	5	1Tx	Left Touch	11	2462	18.3	18.3			1.120	0.431	1.120	0.431				
		Body	802.11b	5	1Tx	Edge 2	11	2462	18.8	18.8			1.130	0.461	1.130	0.461				
Variant 2 Spot Check	2.4 GHz	Head	802.11b	5	1Tx	Left Touch	11	2462	18.3	18.3			0.976	0.377	0.976	0.377				
		Body	802.11b	5	1Tx	Edge 2	11	2462	18.8	18.3			0.891	0.373	1.000	0.419				

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-1 and U-NII-2A Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.2 & 5.3 GHz	Head	802.11a	0	1 Tx	Right Touch	60	5300	21.0	21.0			0.618	0.205	0.618	0.205				
		Body-worn	802.11n HT40	5	1 Tx	Rear	62	5310			18.0	18.0					1.160	0.342	1.160	0.342
Variant 2 Spot Check	5.2 & 5.3 GHz	Head	802.11a	0	1 Tx	Right Touch	60	5300	21.0	21.0			0.537	0.185	0.537	0.185				
		Body-worn	802.11n HT40	5	1 Tx	Rear	62	5310			18.0	18.0					1.110	0.313	1.110	0.313

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-2C Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.5 GHz	Head	802.11a	0	1 Tx	Right Tilt	104	5520	21.0	21.0			0.451	0.138	0.451	0.138				
		Body-worn	802.11ac	5	1 Tx	Rear	138	5690	19.3	19.3			1.190	0.323	1.190	0.323				
Variant 2 Spot Check	5.5 GHz	Head	802.11a	0	1 Tx	Right Tilt	104	5520	21.0	21.0			0.364	0.120	0.364	0.120				
		Body-worn	802.11ac	5	1 Tx	Rear	138	5690	19.3	19.3			1.070	0.305	1.070	0.305				

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-3 Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.8 GHz	Head	802.11a	0	1 Tx	Right Tilt	157	5785	21.0	20.1			0.460	0.149	0.566	0.183				
		Body-worn	802.11ac VHT80	5	2 Tx	Rear	155	5775	14.8	14.8	18.8	18.8	1.130	0.314	1.130	0.314	1.180	0.352	1.180	0.352
Variant 2 Spot Check	5.8 GHz	Head	802.11a	0	1 Tx	Right Tilt	157	5785	21.0	20.1			0.355	0.109	0.437	0.134				
		Body-worn	802.11ac VHT80	5	2 Tx	Rear	155	5775	14.8	14.8	18.8	18.8	1.090	0.280	1.090	0.280	0.934	0.281	0.934	0.281

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.28. Bluetooth

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Bluetooth: P_{low} , P_{High} , $P_{\text{standalone}}$ and for each Antenna – UAT 1 and LAT 3 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

P_{low}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	10.0	10.0	0.145	0.145	0.060	0.060	
				Left Tilt	39	2441.0	10.0	10.0	0.108	0.108	0.045	0.045	
				Right Touch	39	2441.0	10.0	10.0	0.101	0.101	0.043	0.043	
				Right Tilt	39	2441.0	10.0	10.0	0.128	0.128	0.049	0.049	
	Body-worn	GFSK	5	Rear	39	2441.0	10.0	10.0	0.084	0.084	0.036	0.036	
				Front	39	2441.0	10.0	10.0	0.039	0.039	0.017	0.017	

P_{High}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	12.0	12.0	0.248	0.248	0.112	0.112	
				Left Tilt	39	2441.0	12.0	12.0	0.238	0.238	0.093	0.093	
				Right Touch	39	2441.0	12.0	12.0	0.166	0.166	0.070	0.070	
				Right Tilt	39	2441.0	12.0	12.0	0.203	0.203	0.080	0.080	
	Body-worn	GFSK	5	Rear	39	2441.0	13.5	13.5	0.188	0.188	0.069	0.069	
				Front	39	2441.0	13.5	13.5	0.088	0.088	0.042	0.042	

$P_{\text{standalone}}$

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	14.5	14.5	0.432	0.432	0.178	0.178	
				Left Tilt	39	2441.0	14.5	14.5	0.356	0.356	0.142	0.142	
				Right Touch	39	2441.0	14.5	14.5	0.419	0.419	0.173	0.173	
				Right Tilt	39	2441.0	14.5	14.5	0.445	0.445	0.173	0.173	49
	Body-worn	GFSK	5	Rear	39	2441.0	16.5	16.0	0.346	0.388	0.132	0.148	
				Front	39	2441.0	16.5	16.0	0.251	0.282	0.113	0.127	

LAT 3

 P_{low}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	10.0	10.0	0.045	0.045	0.027	0.027	
				Left Tilt	39	2441.0	10.0	10.0	0.025	0.025	0.015	0.015	
				Right Touch	39	2441.0	10.0	10.0	0.034	0.034	0.021	0.021	
				Right Tilt	39	2441.0	10.0	10.0	0.012	0.012	0.008	0.008	
	Body-worn	GFSK	5	Rear	39	2441.0	10.0	10.0	0.077	0.077	0.036	0.036	
				Front	39	2441.0	10.0	10.0	0.016	0.016	0.008	0.008	

 P_{high}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	16.5	16.5	0.091	0.091	0.049	0.049	
				Left Tilt	39	2441.0	16.5	16.5	0.029	0.029	0.016	0.016	
				Right Touch	39	2441.0	16.5	16.5	0.056	0.056	0.029	0.029	
				Right Tilt	39	2441.0	16.5	16.5	0.049	0.049	0.025	0.025	
	Body-worn	GFSK	5	Rear	39	2441.0	13.5	13.5	0.129	0.129	0.059	0.059	
				Front	39	2441.0	13.5	13.5	0.028	0.028	0.017	0.017	

 $P_{standalone}$

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	19.5	19.5	0.224	0.224	0.124	0.124	
				Left Tilt	39	2441.0	19.5	19.5	0.079	0.079	0.043	0.043	
				Right Touch	39	2441.0	19.5	19.5	0.117	0.117	0.070	0.070	
				Right Tilt	39	2441.0	19.5	19.5	0.108	0.108	0.059	0.059	
	Body-worn	GFSK	5	Rear	39	2441.0	16.5	16.0	0.440	0.494	0.208	0.233	50
				Front	39	2441.0	16.5	16.0	0.105	0.118	0.060	0.067	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Head	Edge 4	No	0.653	N/A	N/A	N/A	N/A
	LTE Band 13	Body & Hotspot	Rear	No	0.630	N/A	N/A	N/A	N/A
850	GSM 850	Hotspot	Edge 4	No	0.269	N/A	N/A	N/A	N/A
	CDMA BC0	Body	Rear	No	0.652	N/A	N/A	N/A	N/A
	CDMA BC10	Head	Left Touch	No	0.618	N/A	N/A	N/A	N/A
	WCDMA Band V	Head	Left Touch	Yes	0.825	0.728	1.13	N/A	N/A
	LTE Band 26	Head	Left Touch	No	0.712	N/A	N/A	N/A	N/A
1700	WCDMA Band IV	Body & Hotspot	Rear	No	0.883	N/A	N/A	N/A	N/A
	LTE Band 66	Head	Right Touch	YES	1.070	0.996	1.07	N/A	N/A
1900	GSM 1900	Body & Hotspot	Rear	No	1.030	N/A	N/A	N/A	N/A
	CDMA BC1	Body & Hotspot	Rear	Yes	1.090	1.060	1.03	N/A	N/A
	WCDMA Band II	Body & Hotspot	Rear	No	1.010	N/A	N/A	N/A	N/A
	LTE Band 25	Hotspot	Edge 3	No	1.080	N/A	N/A	N/A	N/A
2300	LTE Band 30	Head	Right Tilt	Yes	1.010	1.000	1.01	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Body	Edge 2	Yes	1.130	0.960	1.18	N/A	N/A
	BT	Body	Front	No	0.445	N/A	N/A	N/A	N/A
2500	LTE Band 7	Head	Left Touch	Yes	1.090	1.000	1.09	N/A	N/A
2600	LTE Band 41	Head	Left Touch	Yes	1.010	0.952	1.06	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Body	Right Touch	Yes	1.16	1.10	1.05	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Body	Rear	Yes	1.19	1.10	1.08	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Body	Front	Yes	1.18	1.14	1.04	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations				
Head Body Worn Accessory Hotspot	1	WWAN OFF (CELLULAR ANTENNAS OFF)	+ (UAT 2) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{High})	
	2		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{High})	
	3		+ Wi-Fi 5 GHz MIMO	+	(UAT 1) Bluetooth (P _{High})	
	4		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{High})	
	5		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{High})	
	6		+ Wi-Fi 5 GHz MIMO	+	(LAT 3) Bluetooth (P _{High})	
	7	WWAN ON (CELLULAR ANTENNAS ON)	+ (UAT 1) Wi-Fi 2.4 GHz SISO			
	8		+ (LAT 3) Wi-Fi 2.4 GHz SISO			
	9		+ Wi-Fi 2.4 GHz MIMO			
	10			+	(UAT 1) Bluetooth (P _{High})	
	11			+	(LAT 3) Bluetooth (P _{High})	
	12		+ (UAT 2) Wi-Fi 5 GHz SISO			
	13		+ (LAT 3) Wi-Fi 5 GHz SISO			
	14		+ Wi-Fi 5 GHz MIMO			
	15		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{Low})	
	16		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{Low})	
	17		+ Wi-Fi 5 GHz MIMO	+	(UAT 1) Bluetooth (P _{Low})	
	18		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{Low})	
	19		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{Low})	
	20		+ Wi-Fi 5 GHz MIMO	+	(LAT 3) Bluetooth (P _{Low})	
Notes:						
1. Wi-Fi 2.4GHz & Bluetooth cannot transmit simultaneously.						
2. Conditions 12, 13, and 14 are covered by conditions 15, 16, and 17, respectively.						

12.1. Sum of the SAR for Worst Case Cell-Off (UNII & BT only)

RF Exposure Condition	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/g)					
		(E)	(F)	(G)	(H)	(J)	(E)+(H)	(F)+(H)	(G)+(H)	(E)+(J)	(F)+(J)	(G)+(J)
		U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-high	BT LAT3 P-high	U-NII+BT UAT2+UAT1P-high	U-NII+BT LAT3+UAT1P-high	U-NII+BT MIMO+UAT1P-high	U-NII+BT UAT2+LAT3 P-high	U-NII+BT LAT3+LAT3 P-high	U-NII+BT MIMO+LAT3 P-high
Head	Left Touch	0.613	0.041	0.434	0.248	0.091	0.866	0.289	0.682	0.709	0.332	0.525
	Left Tilt	0.613	0.041	0.434	0.238	0.029	0.856	0.279	0.672	0.647	0.070	0.463
	Right Touch	0.613	0.041	0.407	0.166	0.056	0.784	0.207	0.573	0.674	0.097	0.463
	Right Tilt	0.587	0.041	0.434	0.203	0.049	0.790	0.244	0.637	0.636	0.090	0.483
Body-worn Accessory & Hotspot	Rear	1.160	1.190	1.180	0.188	0.129	1.348	1.378	1.368	1.289	1.319	1.309
	Front	1.160	1.190	1.180	0.088	0.028	1.248	1.278	1.268	1.188	1.218	1.208
Hotspot	Edge 1	1.160	1.190	1.180			1.160	1.190	1.180	1.160	1.190	1.180
	Edge 2	1.160	1.190	1.180			1.160	1.190	1.180	1.160	1.190	1.180
	Edge 3	1.160	0.380	0.099			1.160	0.380	0.099	1.160	0.380	0.099
	Edge 4	0.262	1.190	0.175			0.262	1.190	0.175	0.262	1.190	0.175

12.2. Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), DTS and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/g)				
		(A)	(B)	(C)	(D)	(H)	(J)	(A)+(B)	(A)+(C)	(A)+(D)	(A)+(H)	(A)+(J)
		WWAN UAT1	DTS UAT1	DTS LAT3	DTS MIMO	BT UAT1P-high	BT LAT3 P-high	WWAN+DTS UAT1+UAT1	WWAN+DTS UAT1+LAT3	WWAN+DTS UAT1+MIMO	WWAN+BT UAT1+UAT1P-high	WWAN+BT UAT1+LAT3 P-high
Head	Left Touch	1090	0.322	0.249	0.310	0.248	0.091	1412	1339	1400	1338	1181
	Left Tilt	0.785	0.322	0.249	0.310	0.238	0.029	1107	1034	1095	1023	0.814
	Right Touch	1074	0.322	0.249	0.310	0.166	0.056	1396	1323	1384	1240	1130
	Right Tilt	1050	0.322	0.249	0.310	0.203	0.049	1372	1299	1360	1253	1099
Body-worn Accessory & Hotspot	Rear	0.893	0.413	0.334	0.540	0.188	0.129	1306	1227	1433	1081	1022
	Front	0.619	0.474	0.334	0.540	0.088	0.028	1093	0.953	1.159	0.707	0.647
Hotspot	Edge 1	0.808	0.474	0.334	0.540			1282	1142	1348	0.808	0.808
	Edge 2	0.882	0.474	0.334	0.487			1356	1216	1369	0.882	0.882
	Edge 4	0.636	0.474	0.334	0.540			1110	0.970	1.176	0.636	0.636

12.3. Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), UNII and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1g SAR (W/g)					
		(A)	(E)	(F)	(G)	(I)	(K)	(A)+(E)+(I)	(A)+(F)+(I)	(A)+(G)+(I)	(A)+(E)+(K)	(A)+(F)+(K)	(A)+(G)+(K)
		WWAN UAT1	U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-low	BT LAT3 P-low	WWAN+U-NII+BT UAT1+UAT2+UAT1P-low	WWAN+U-NII+BT UAT1+LAT3+UAT1P-low	WWAN+U-NII+BT UAT1+MIMO+UAT1P-low	WWAN+U-NII+BT UAT1+UAT2+LAT3 P-low	WWAN+U-NII+BT UAT1+LAT3+LAT3 P-low	WWAN+U-NII+BT UAT1+MIMO+LAT3 P-low
Head	Left Touch	1090	0.184	0.041	0.199	0.145	0.045	1419	1276	1434	1319	1176	1334
	Left Tilt	0.785	0.184	0.041	0.199	0.108	0.025	1077	0.934	1092	0.994	0.851	1009
	Right Touch	1074	0.184	0.041	0.199	0.101	0.034	1359	1216	1374	1292	1149	1307
	Right Tilt	1050	0.184	0.041	0.199	0.128	0.012	1362	1219	1377	1246	1103	1261
Body-worn Accessory & Hotspot	Rear	0.893	0.400	0.213	0.377	0.084	0.077	1377	1190	1354	1370	1183	1347
	Front	0.619	0.400	0.213	0.377	0.039	0.016	1058	0.871	1035	1035	0.848	1012
Hotspot	Edge 1	0.808	0.400	0.213	0.377			1208	1021	1185	1208	1021	1185
	Edge 2	0.882	0.400	0.213	0.377			1282	1095	1259	1282	1095	1259
	Edge 4	0.636	0.072	0.213	0.046			0.708	0.849	0.682	0.708	0.849	0.682

12.4. Sum of the SAR for Worst Case Cell-On (Cellular LAT 1), DTS and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1g SAR (W/g)				
		(A)	(B)	(C)	(D)	(H)	(J)	(A)+(B)	(A)+(C)	(A)+(D)	(A)+(H)	(A)+(J)
		WWAN LAT1	DTS UAT1	DTS LAT3	DTS MIMO	BT UAT1P-high	BT LAT3 P-high	WWAN+DTS LAT1+UAT1	WWAN+DTS LAT1+LAT3	WWAN+DTS LAT1+MIMO	WWAN+BT LAT1+UAT1P-high	WWAN+BT LAT1+LAT3 P-high
Head	Left Touch	0.651	0.322	0.249	0.310	0.248	0.091	0.973	0.900	0.961	0.899	0.742
	Left Tilt	0.221	0.322	0.249	0.310	0.238	0.029	0.543	0.470	0.531	0.459	0.250
	Right Touch	0.422	0.322	0.249	0.310	0.166	0.056	0.744	0.671	0.732	0.588	0.478
	Right Tilt	0.275	0.322	0.249	0.310	0.203	0.049	0.597	0.524	0.585	0.478	0.324
Body-worn Accessory & Hotspot	Rear	1090	0.413	0.334	0.540	0.188	0.129	1503	1424	1630	1278	1219
	Front	0.892	0.474	0.334	0.540	0.088	0.028	1366	1226	1432	0.980	0.920
Hotspot	Edge 2	0.452	0.474	0.334	0.487			0.926	0.786	0.939	0.452	0.452
	Edge 3	1080	0.474	0.334	0.029			1554	1414	1109	1080	1080
	Edge 4	0.723	0.474	0.334	0.540			1197	1057	1263	0.723	0.723


12.5. Sum of the SAR for Worst Case Cell-On (Cellular LAT 1), UNII and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1g SAR (W/g)					
		(A)	(E)	(F)	(G)	(I)	(K)	(A)+(E)+(I)	(A)+(F)+(I)	(A)+(G)+(I)	(A)+(E)+(K)	(A)+(F)+(K)	(A)+(G)+(K)
		WWAN LAT1	U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-low	BT LAT3 P-low	WWAN+U-NII+BT LAT1+UAT2+UAT1P-low	WWAN+U-NII+BT LAT1+LAT3+UAT1P-low	WWAN+U-NII+BT LAT1+MIMO+UAT1P-low	WWAN+U-NII+BT LAT1+UAT2+LAT3 P-low	WWAN+U-NII+BT LAT1+LAT3+LAT3 P-low	WWAN+U-NII+BT LAT1+MIMO+LAT3 P-low
Head	Left Touch	0.651	0.184	0.041	0.199	0.145	0.045	0.980	0.837	0.995	0.880	0.737	0.895
	Left Tilt	0.221	0.184	0.041	0.199	0.108	0.025	0.513	0.370	0.528	0.430	0.287	0.445
	Right Touch	0.422	0.184	0.041	0.199	0.101	0.034	0.707	0.564	0.722	0.640	0.497	0.655
	Right Tilt	0.275	0.184	0.041	0.199	0.128	0.012	0.587	0.444	0.602	0.471	0.328	0.486
Body-worn Accessory & Hotspot	Rear	1090	0.400	0.213	0.377	0.084	0.077	1574	1387	1551	1567	1380	1544
	Front	0.892	0.400	0.213	0.377	0.039	0.016	1331	1144	1308	1308	1121	1285
Hotspot	Edge 2	0.452	0.400	0.213	0.377			0.852	0.665	0.829	0.852	0.665	0.829
	Edge 3	1080	0.400	0.213	0.377			1480	1293	1457	1480	1293	1457
	Edge 4	0.723	0.072	0.213	0.046			0.795	0.936	0.769	0.795	0.936	0.769

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Standalone SAR (W/kg)		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN LAT 1	② DTS MIMO						
Rear	1.090	0.540	① + ②	1.630	146.8	0.01	No	1

Figure (1)

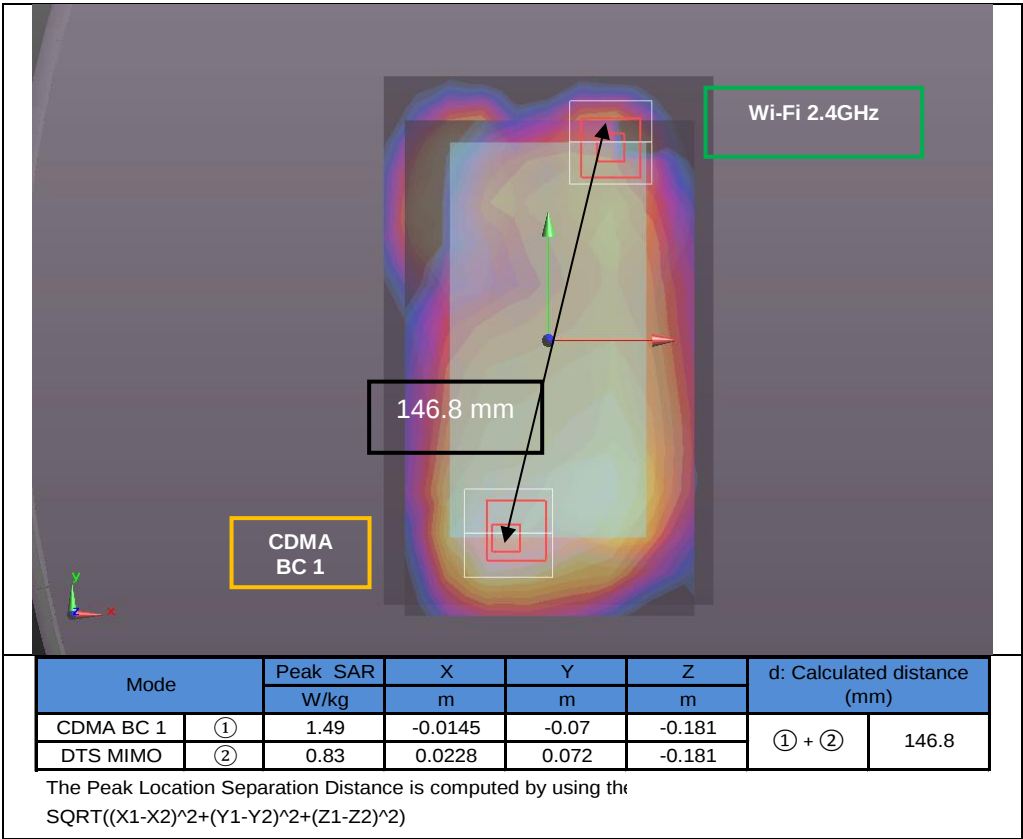

Appendixes

Refer to separated files for the following appendixes.

11792476-S1V2 SAR_App A Setup Photos

11792476-S1V1 SAR_App B System Check Plots

11792476-S1V2 SAR_App C Highest Test Plots

11792476-S1V1 SAR_App D Tissue Ingredients

11792476-S1V1 SAR_App E Probe Cal. Certificates

11792476-S1V2 SAR_App F Dipole Cal. Certificates

END OF REPORT