


2TX Antenna 4 + Antenna 3 CDD MODE

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas (dBm/ 3kHz)	Ant 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-7.50	-7.89	-4.68	8.0	-12.7
Low 2	2417	-5.84	-5.86	-2.84	8.0	-10.8
Low 3	2422	-4.11	-4.49	-1.29	8.0	-9.3
Low 4	2427	-4.26	-3.14	-0.65	8.0	-8.7
Mid 6	2437	-3.94	-3.37	-0.64	8.0	-8.6
High 8	2447	-3.28	-3.36	-0.31	8.0	-8.3
High 9	2452	-4.47	-4.87	-1.66	8.0	-9.7
High 10	2457	-4.66	-6.28	-2.38	8.0	-10.4
High 11	2462	-7.15	-8.01	-4.55	8.0	-12.5
High 12	2467	-9.87	-9.85	-6.85	8.0	-14.8
High 13	2472	-18.16	-17.14	-14.61	8.0	-22.6


LOW CHANNEL 1

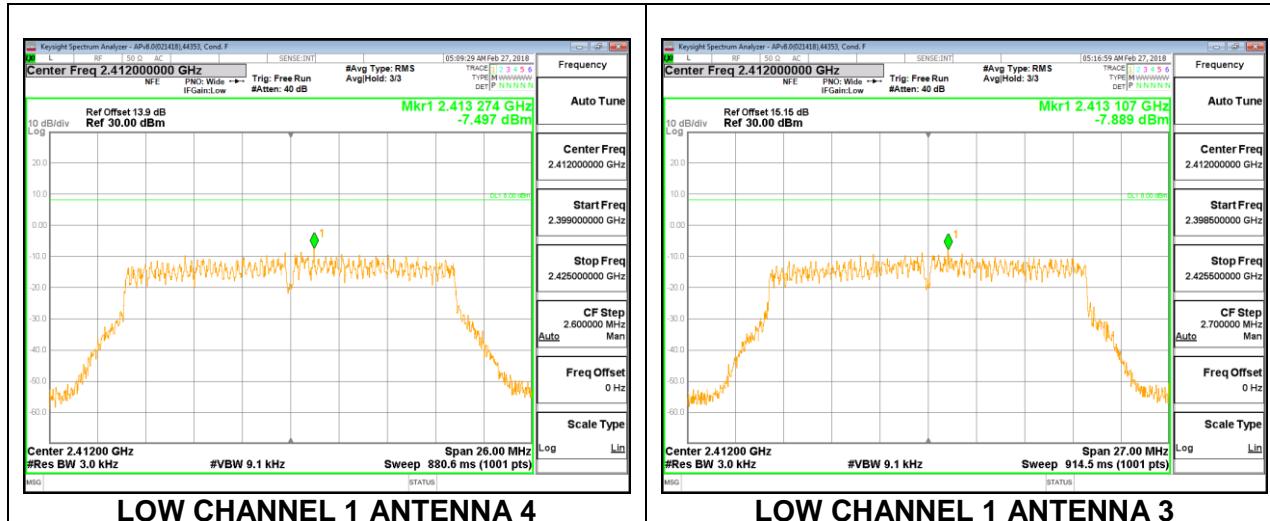

LOW CHANNEL 1 ANTENNA 4

LOW CHANNEL 1 ANTENNA 3


LOW CHANNEL 2

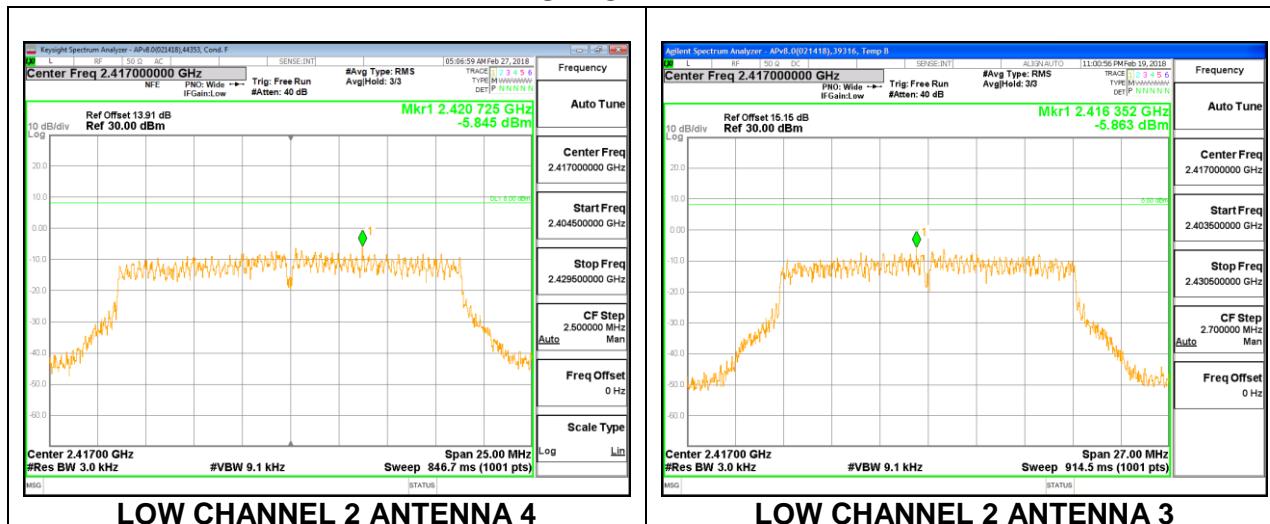

LOW CHANNEL 2 ANTENNA 4

LOW CHANNEL 2 ANTENNA 3


LOW CHANNEL 3

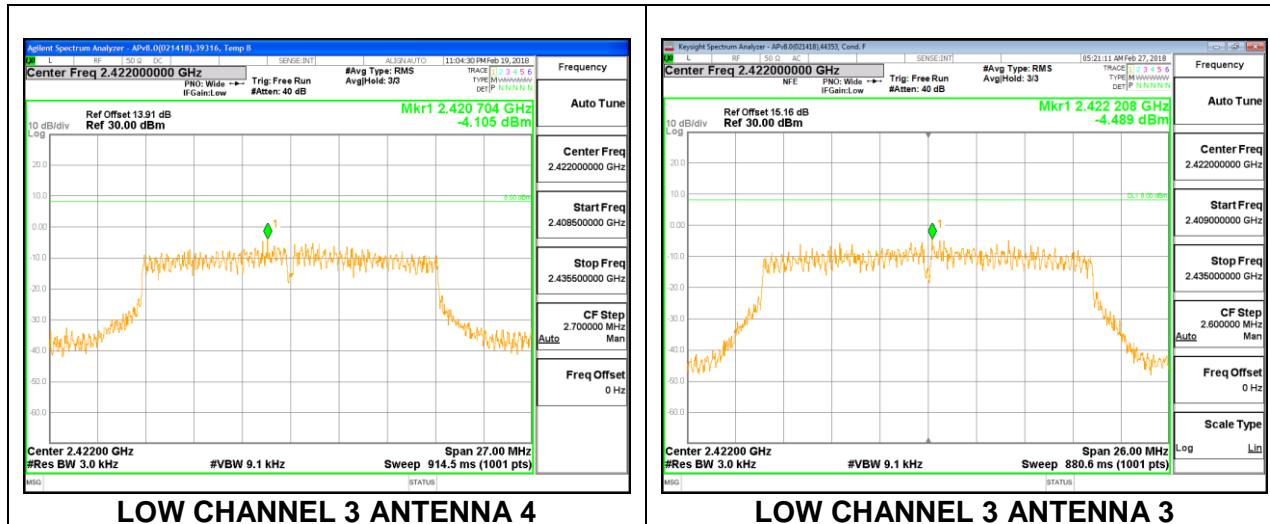


LOW CHANNEL 3 ANTENNA 4

LOW CHANNEL 3 ANTENNA 3


LOW CHANNEL 4

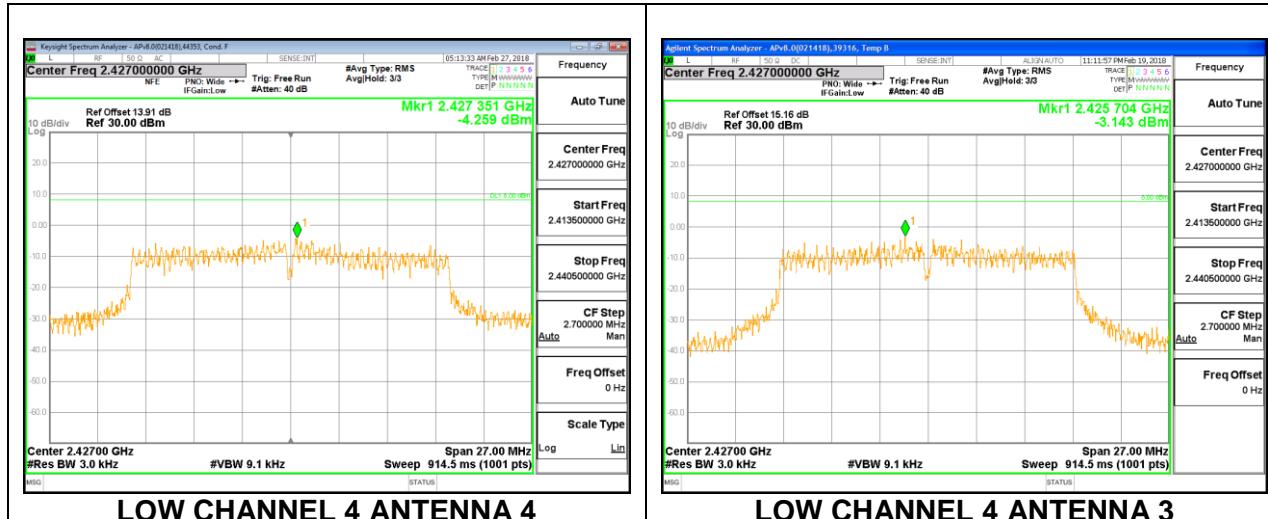


MID CHANNEL 6

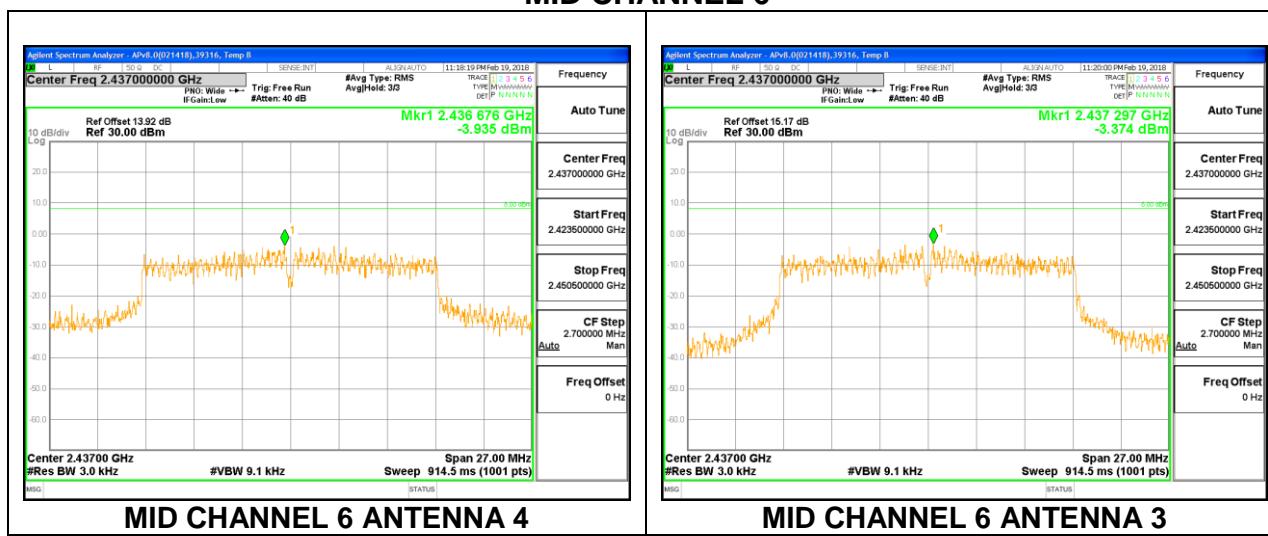

HIGH CHANNEL 8

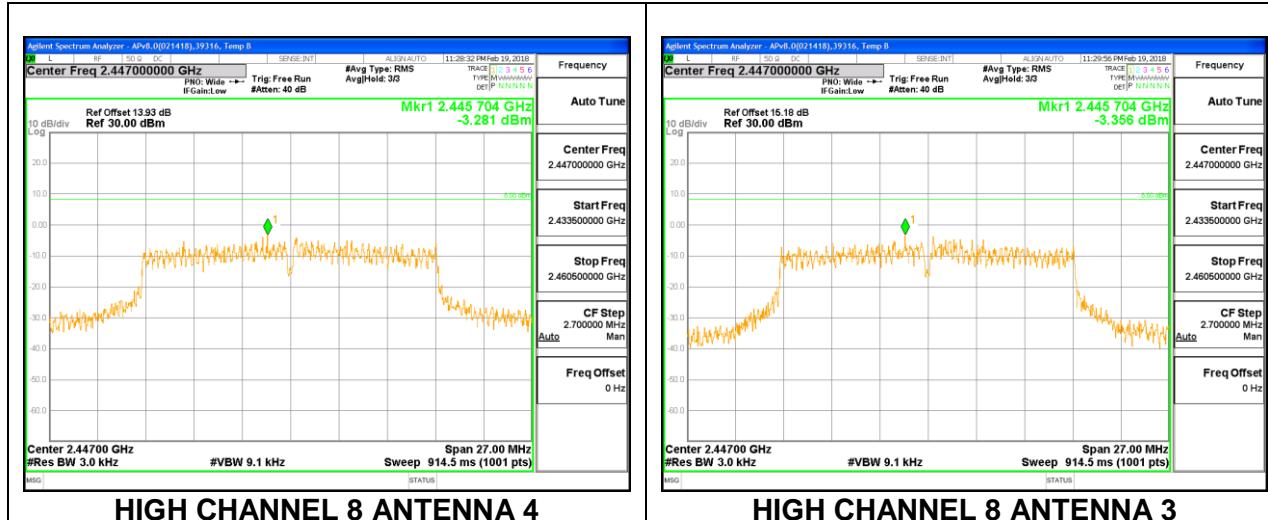


HIGH CHANNEL 9

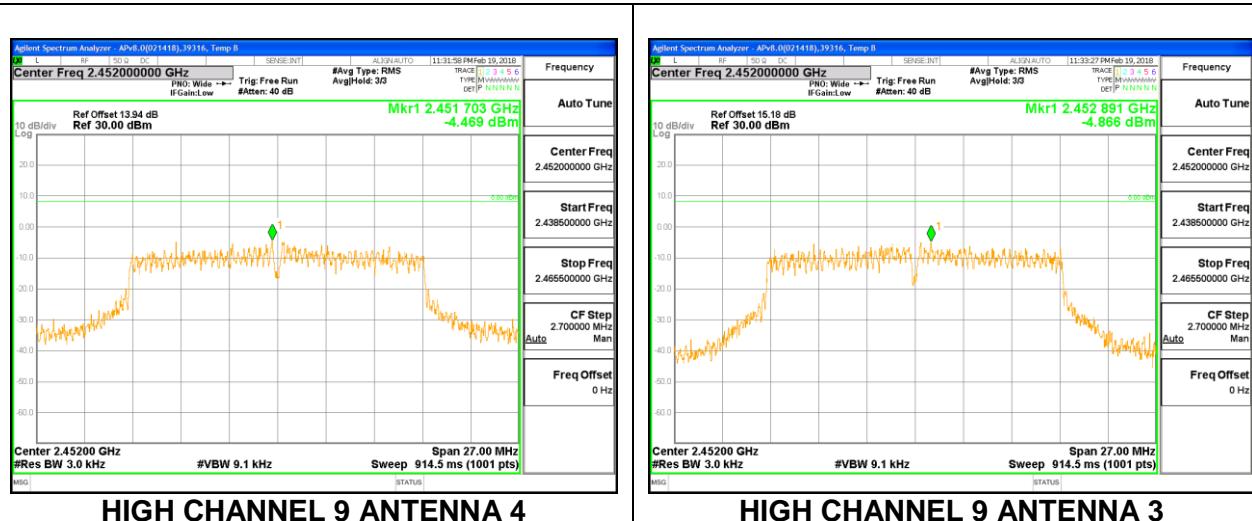

HIGH CHANNEL 9 ANTENNA 4

HIGH CHANNEL 9 ANTENNA 3


HIGH CHANNEL 10

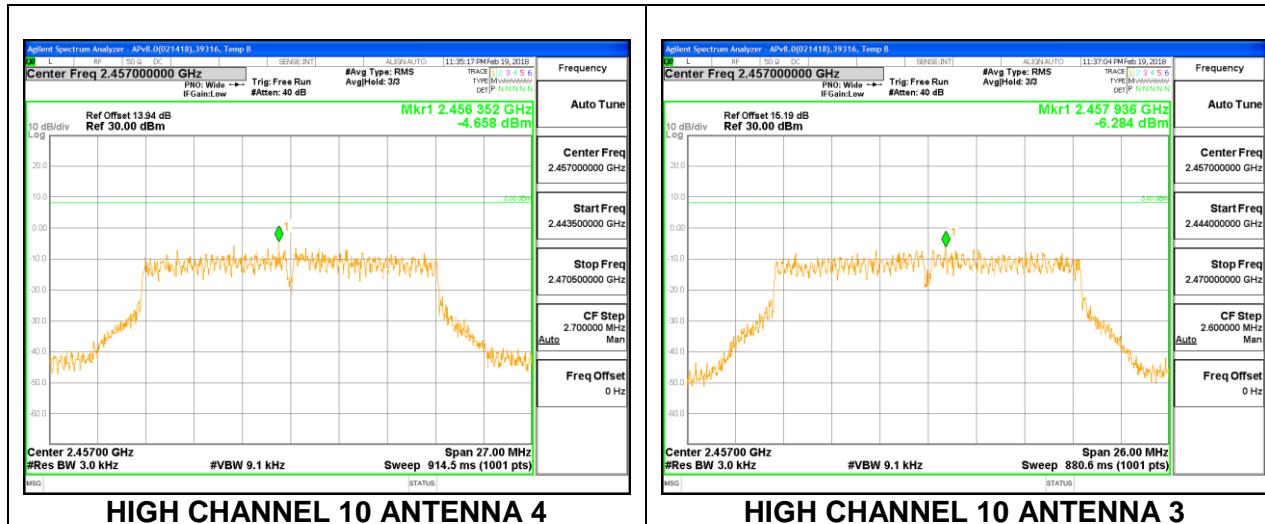

HIGH CHANNEL 10 ANTENNA 4

HIGH CHANNEL 10 ANTENNA 3


HIGH CHANNEL 11

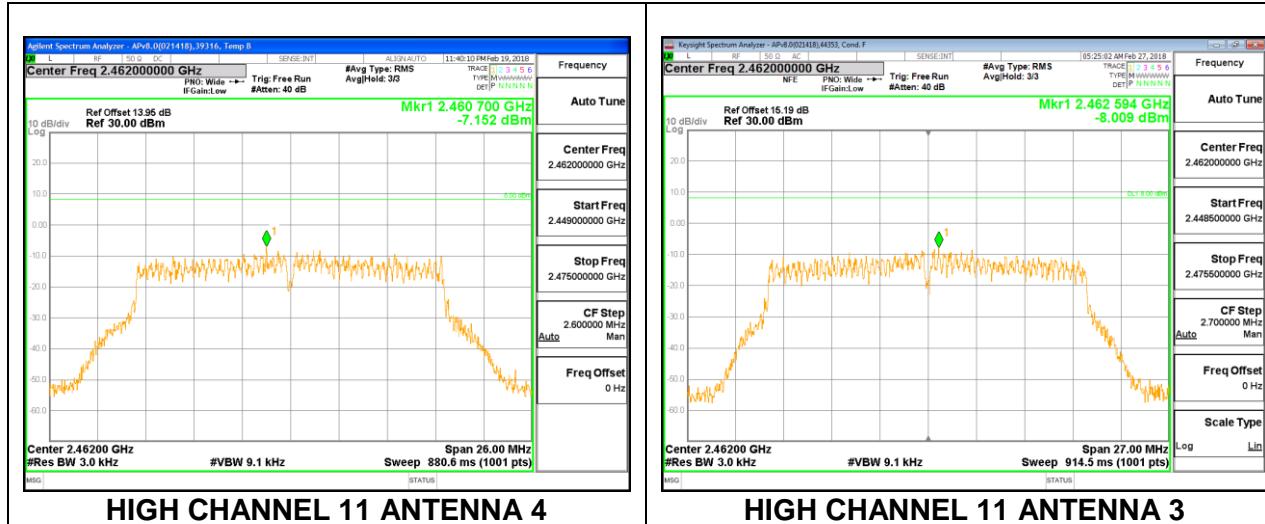

HIGH CHANNEL 11 ANTENNA 4

HIGH CHANNEL 11 ANTENNA 3


HIGH CHANNEL 12

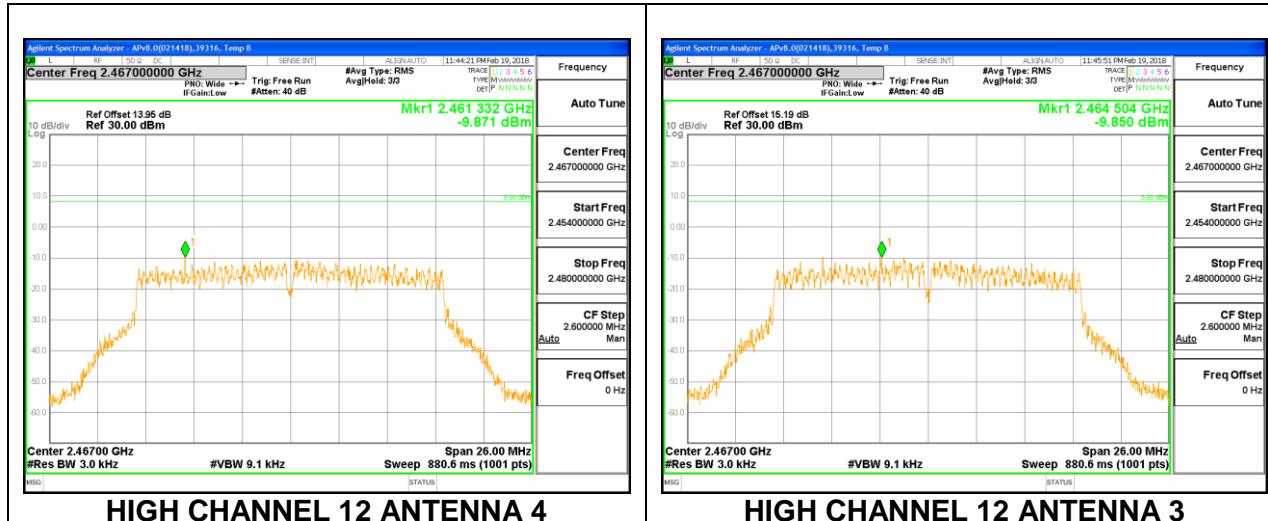

HIGH CHANNEL 12 ANTENNA 4

HIGH CHANNEL 12 ANTENNA 3

HIGH CHANNEL 13

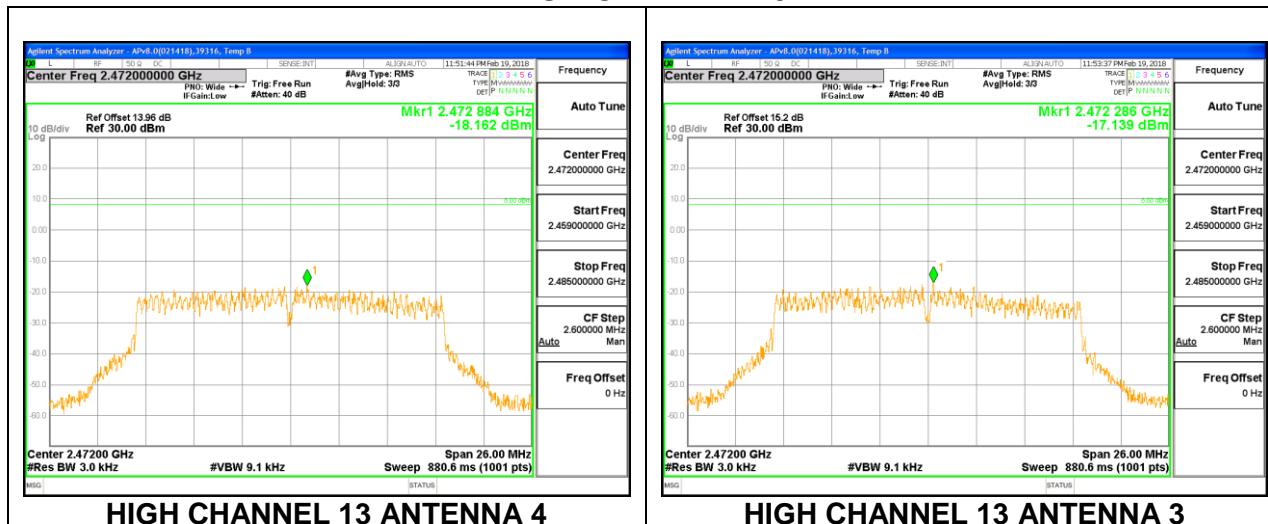

HIGH CHANNEL 13 ANTENNA 4

HIGH CHANNEL 13 ANTENNA 3

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions

RESULTS


8.6.1. 802.11b MODE

1TX Antenna 4

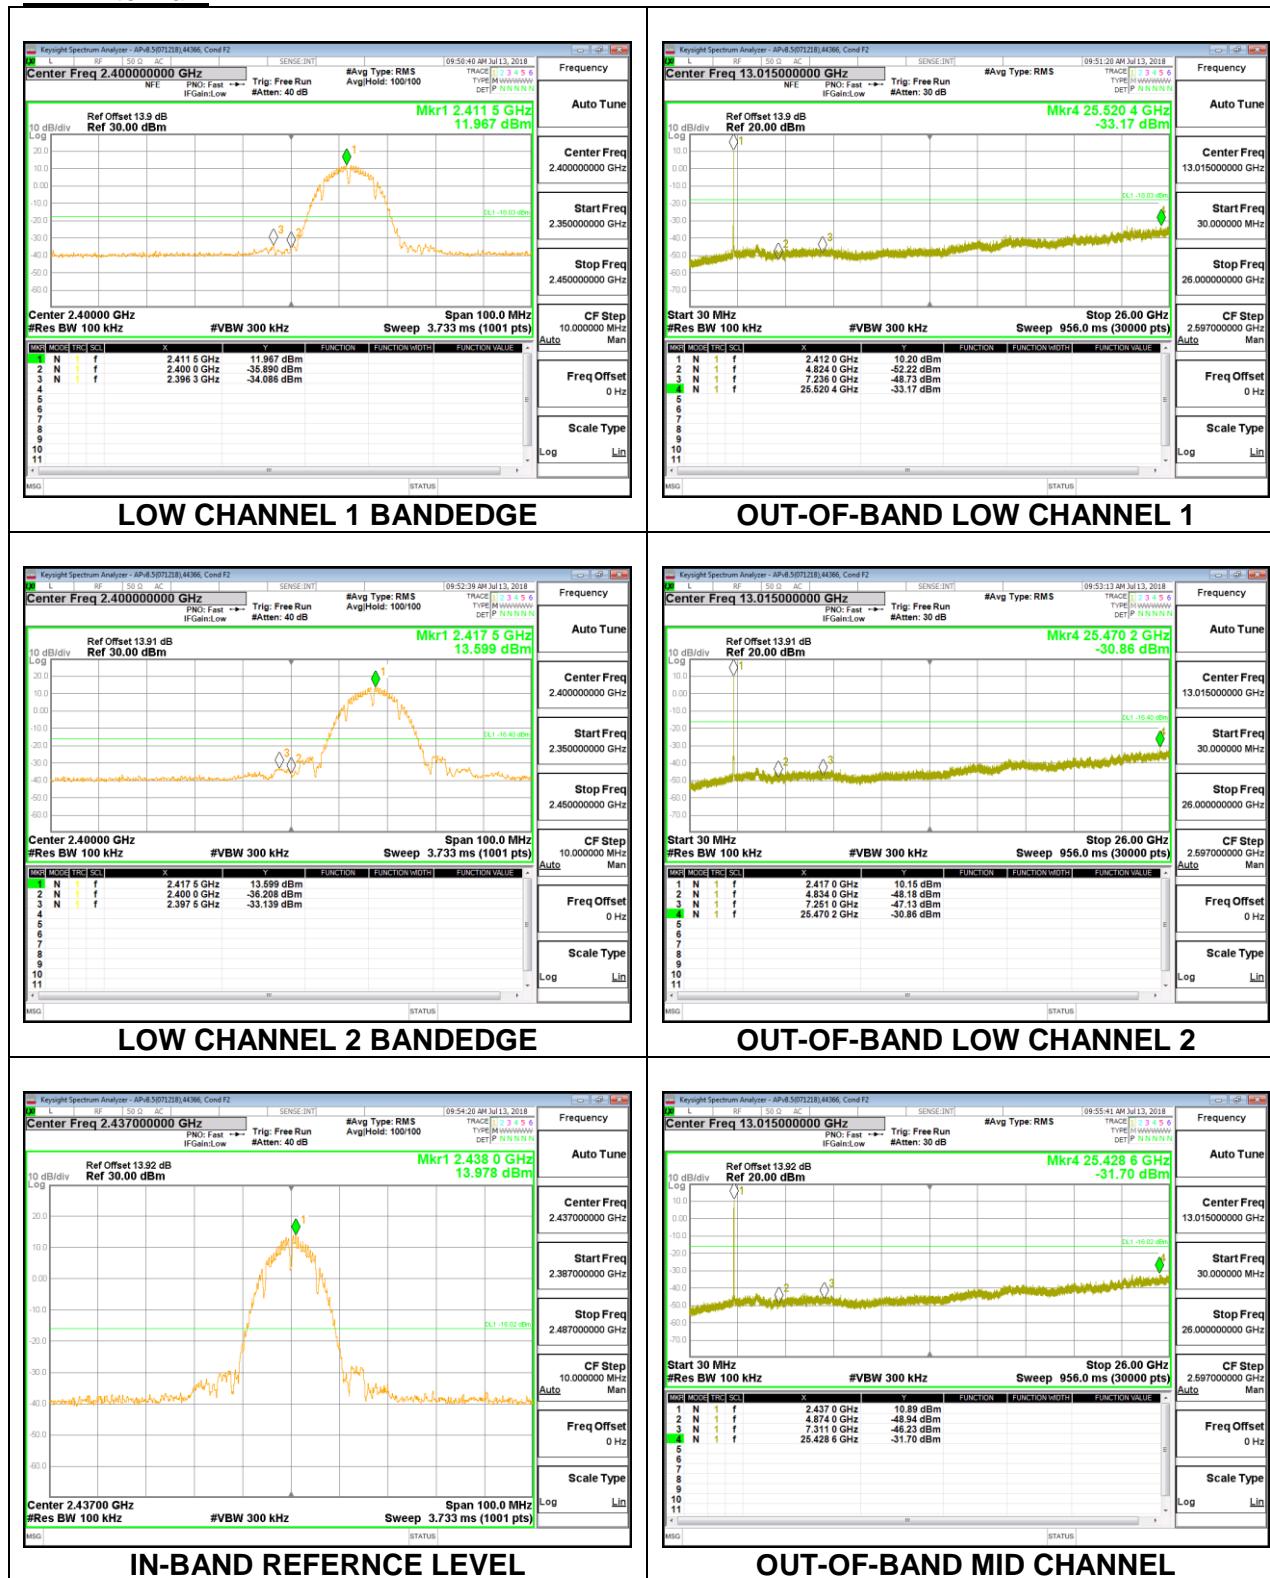



IN-BAND REFERNCE LEVEL

OUT-OF-BAND MID CHANNEL

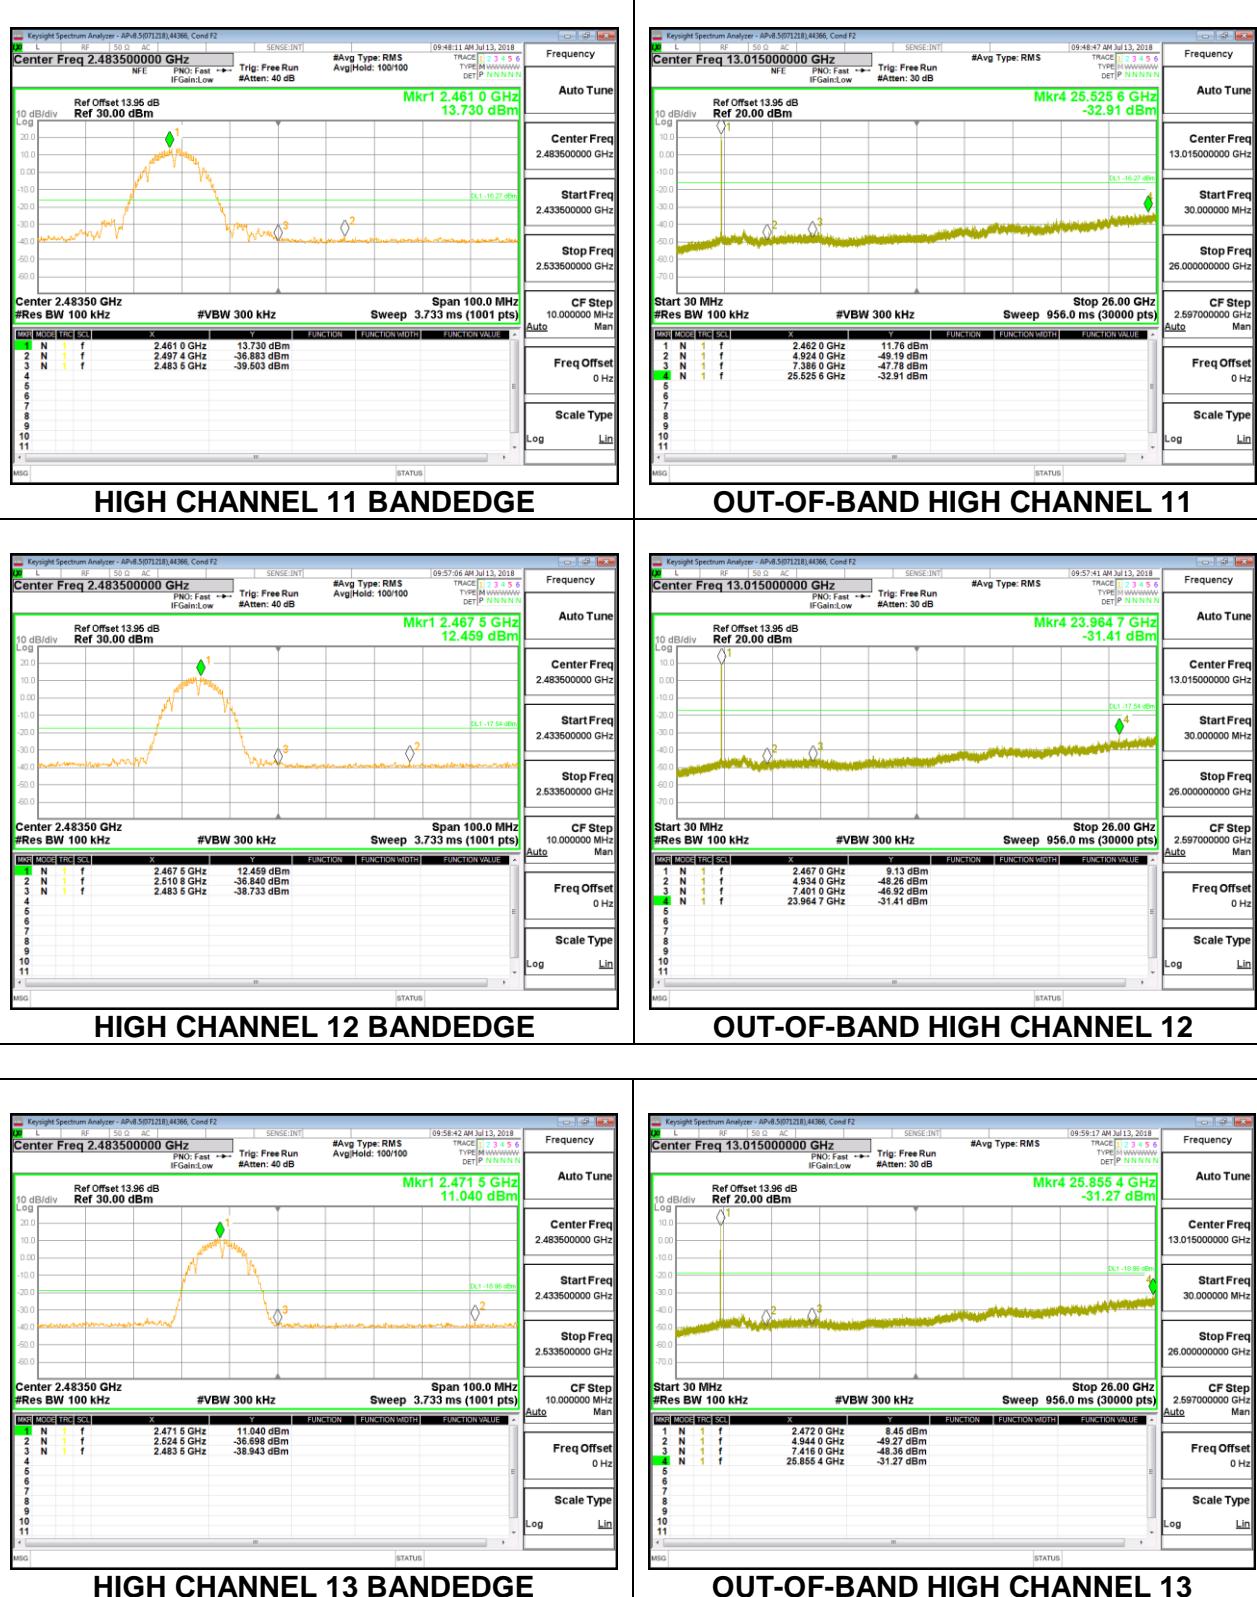

1TX Antenna 3

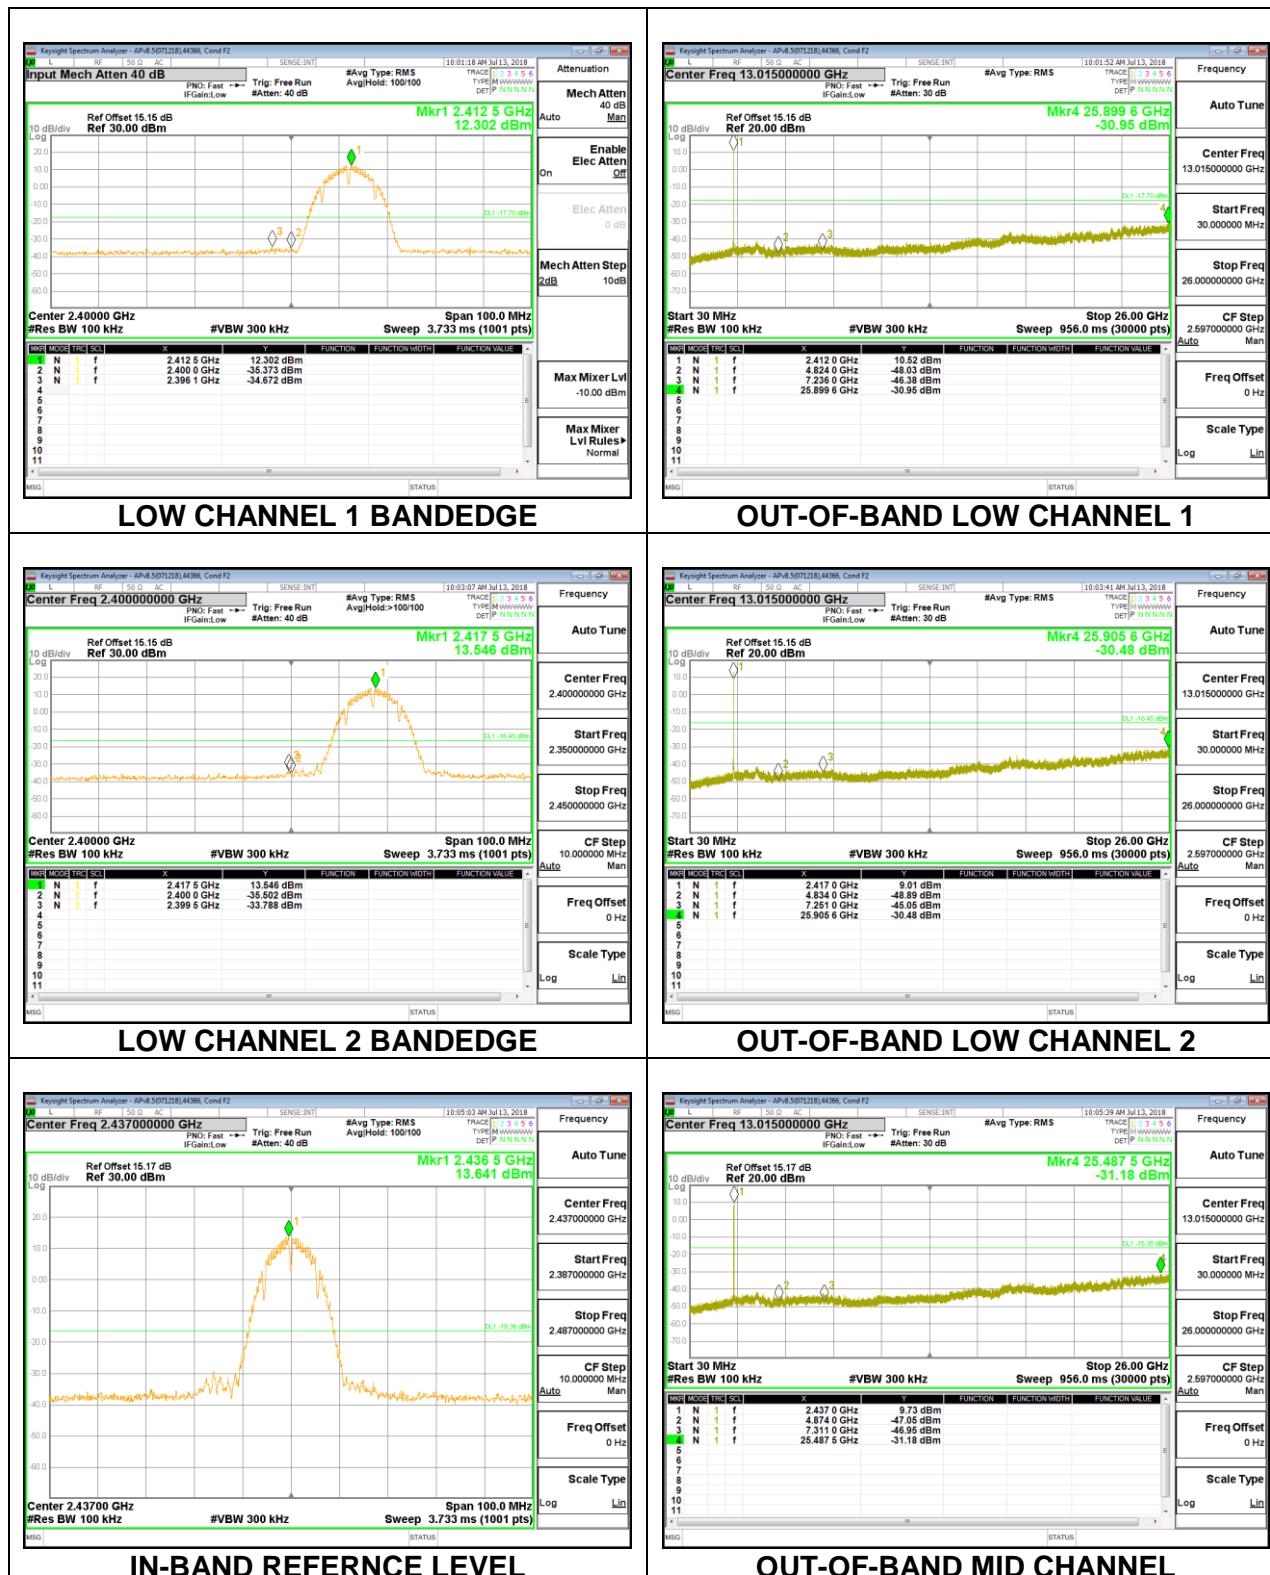

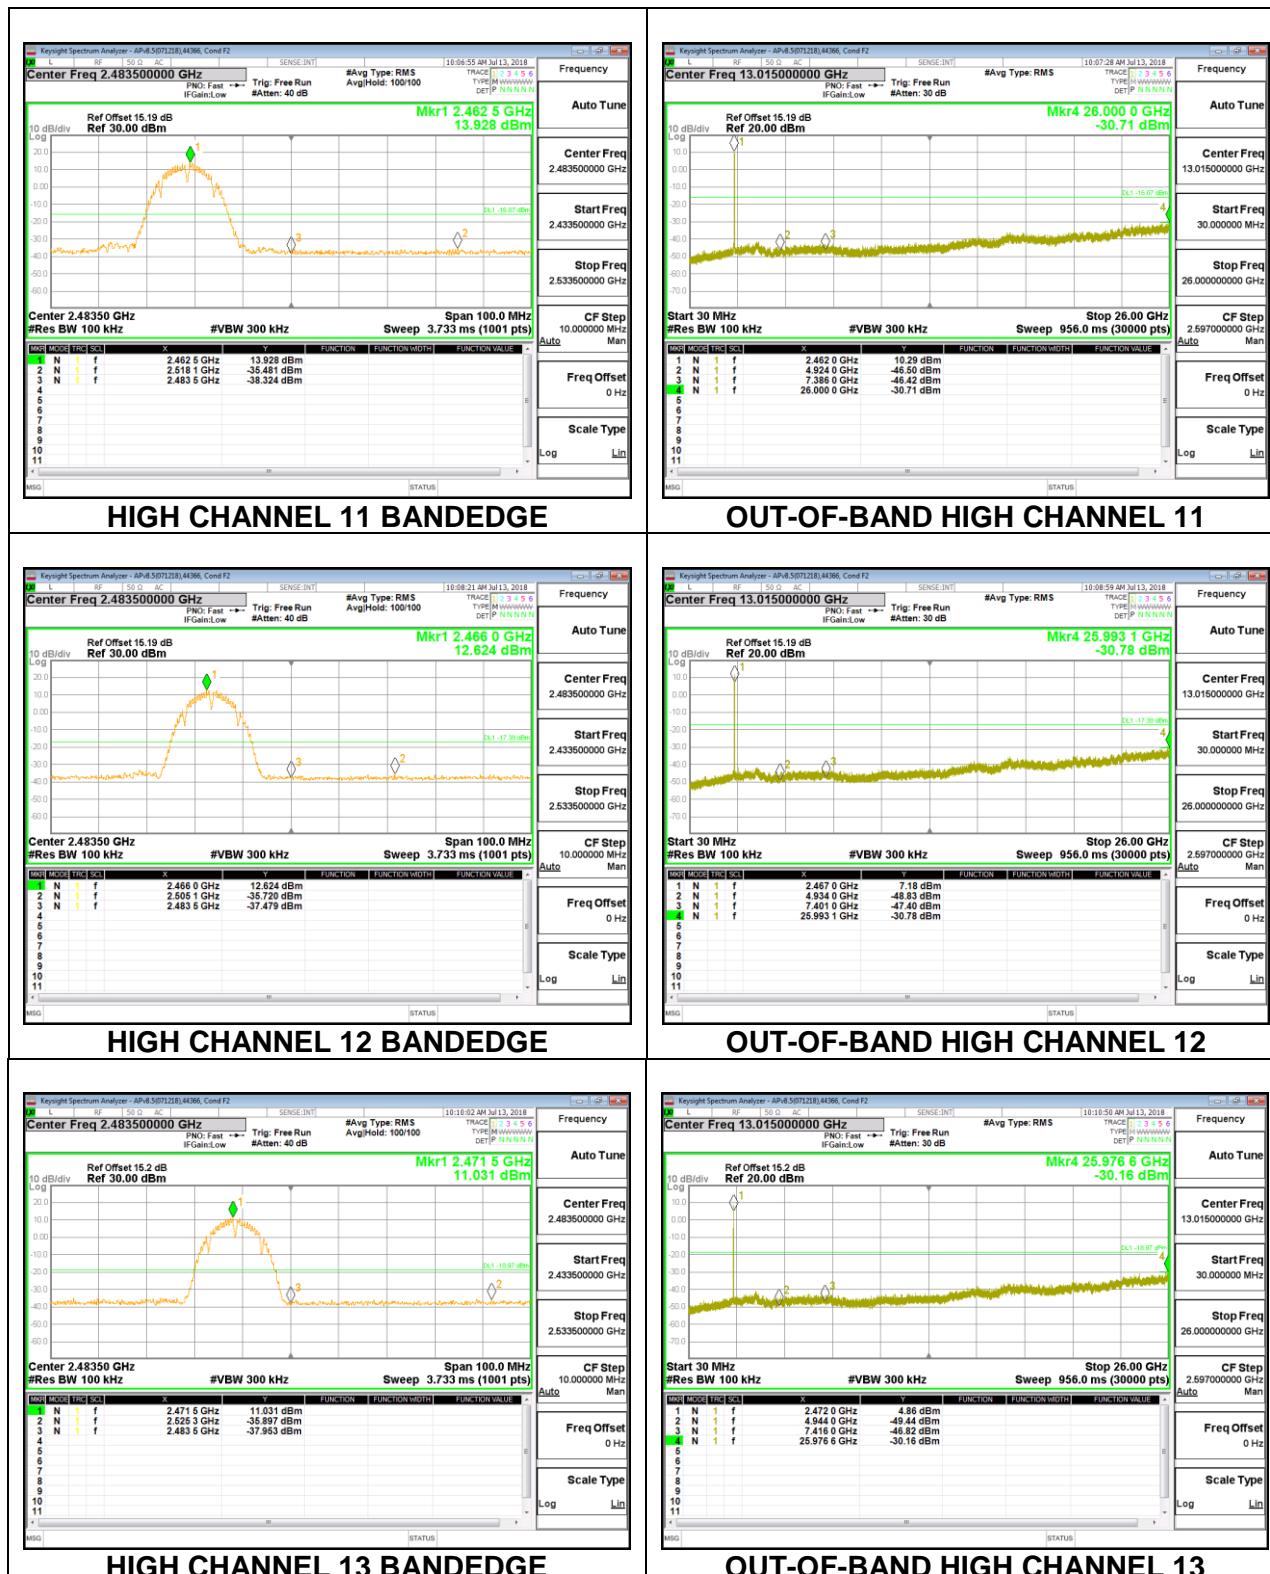

8.6.2. 802.11n HT20 MODE

1TX Antenna 4

