


8.6.4. LOW POWER HDR8


Antenna 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-12.88	8	-20.88
Middle	2441	-11.72	8	-19.72
High	2478	-12.20	8	-20.20

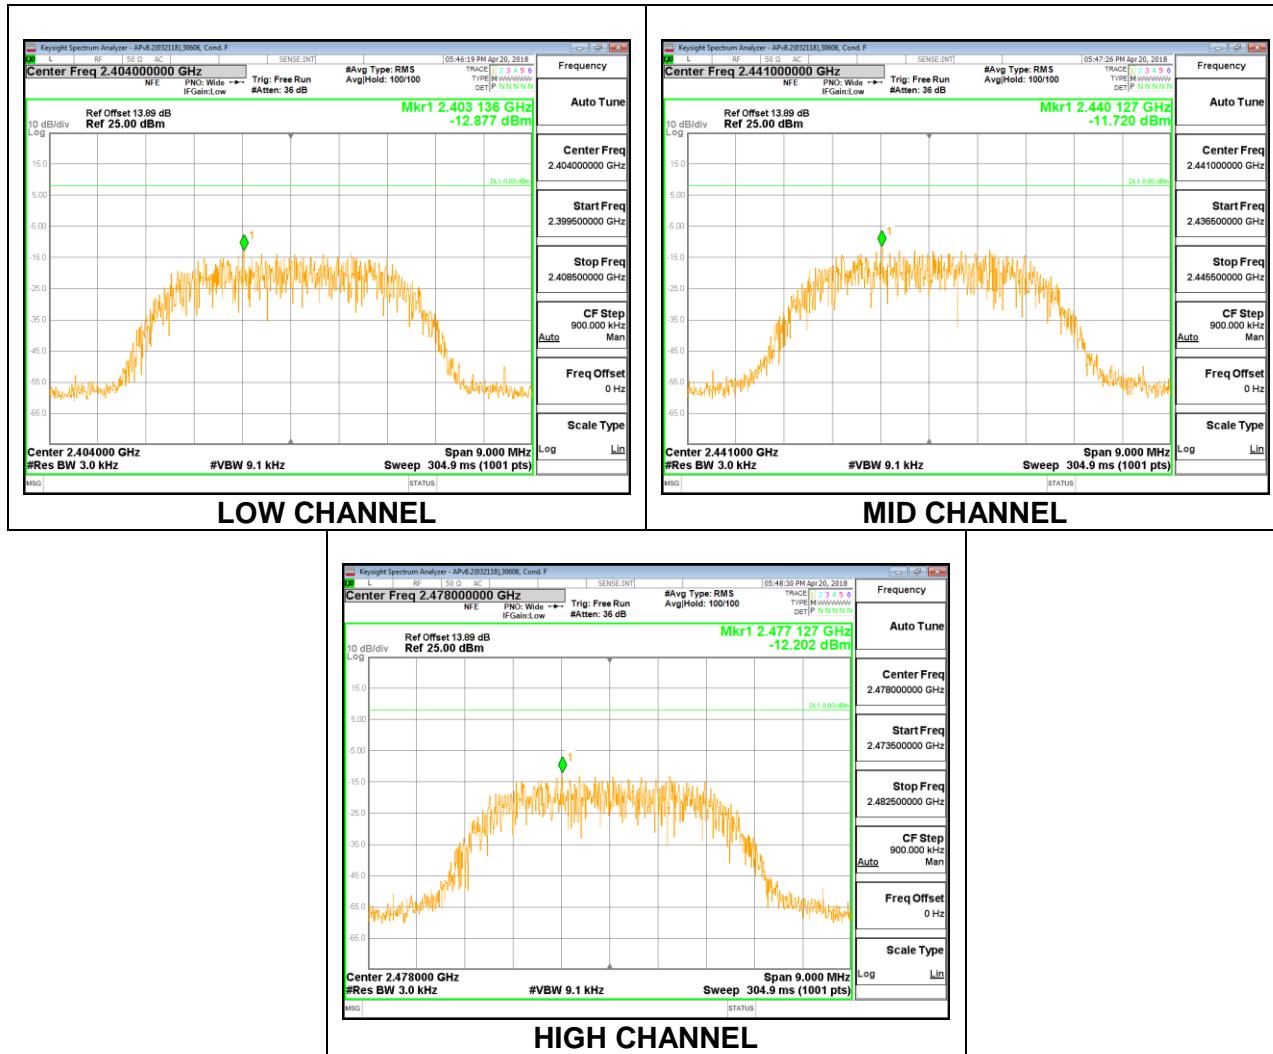

Antenna 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-12.72	8	-20.72
Middle	2441	-11.29	8	-19.29
High	2478	-13.13	8	-21.13

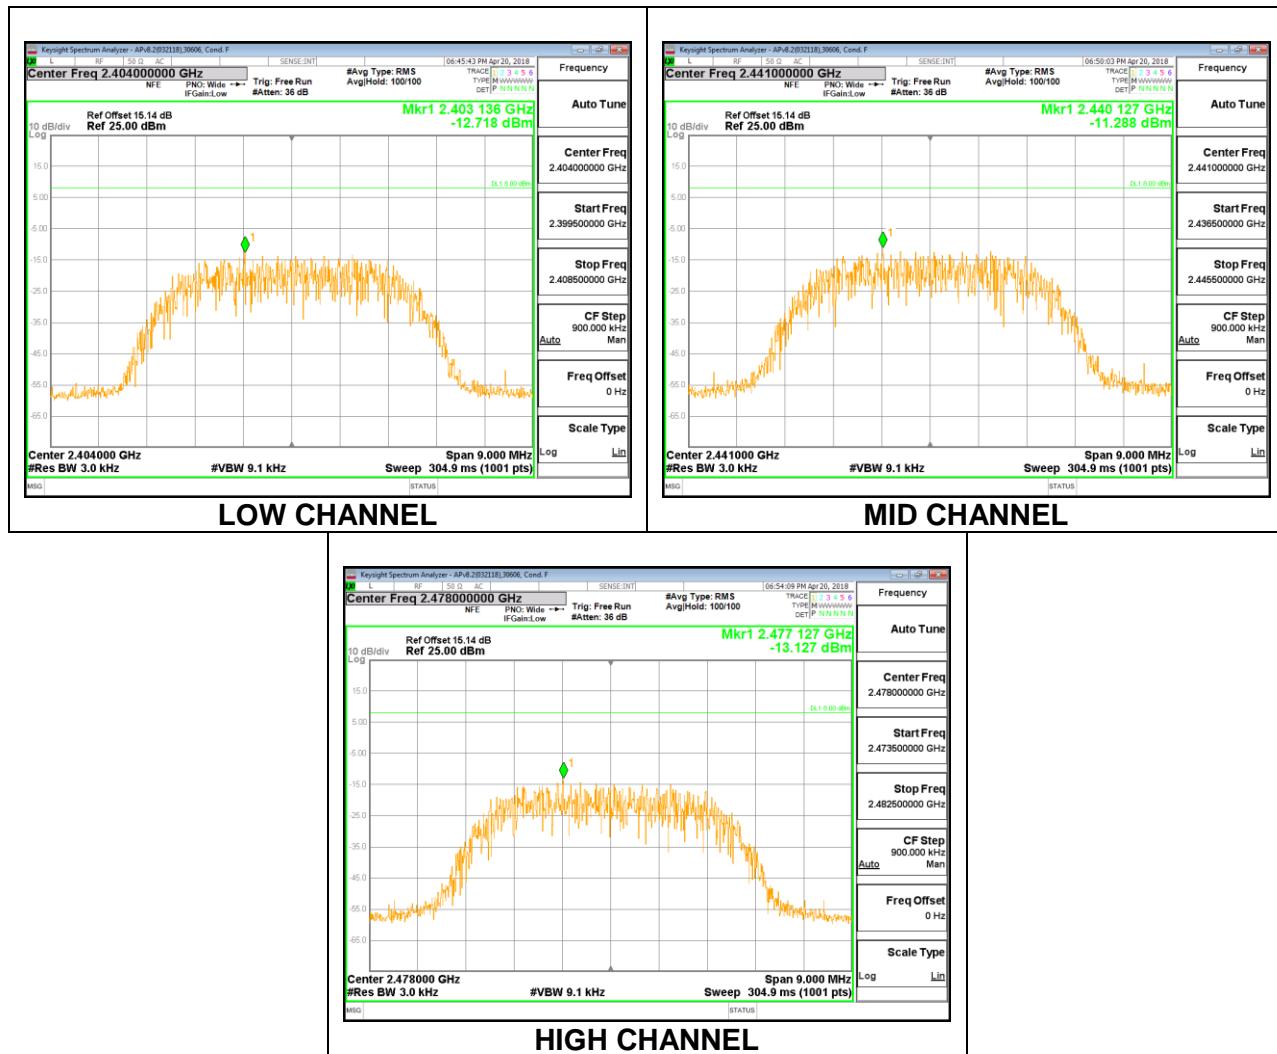

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

8.7.1. HIGH POWER HDR4

Antenna 4

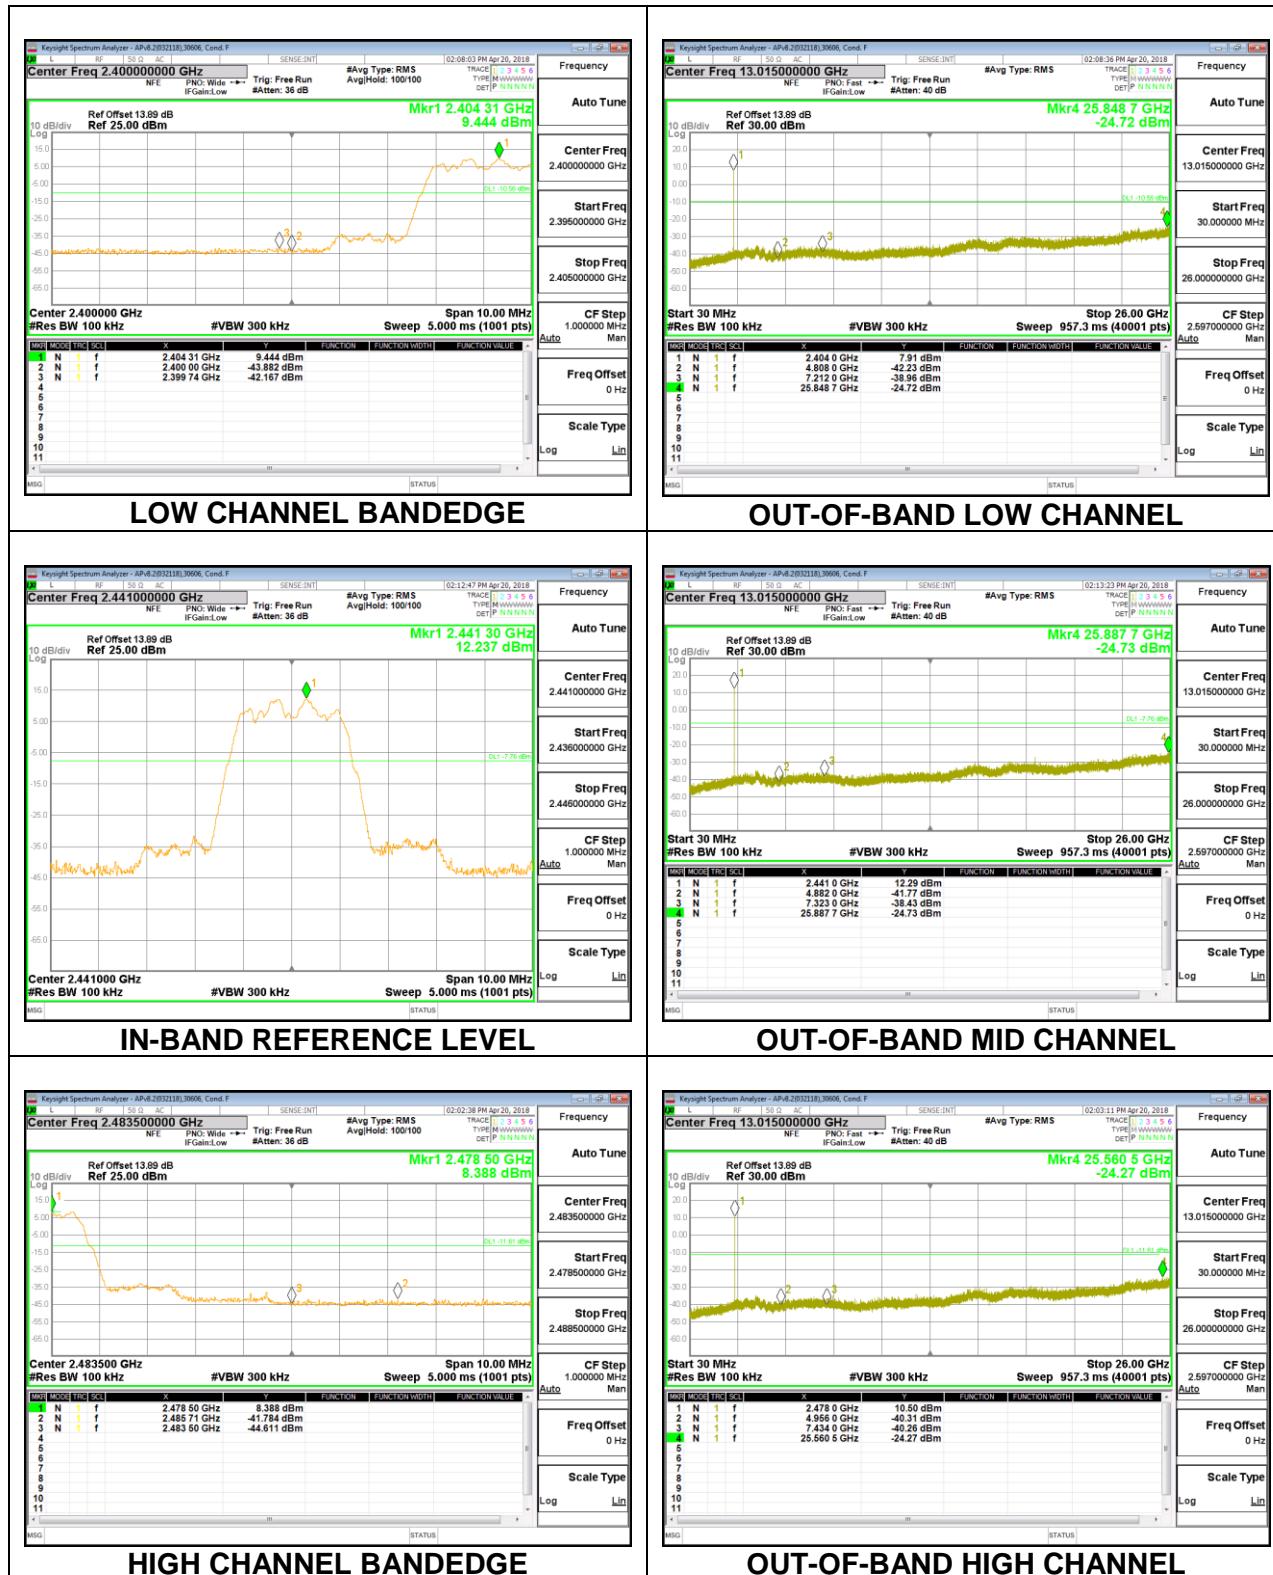


Antenna 4

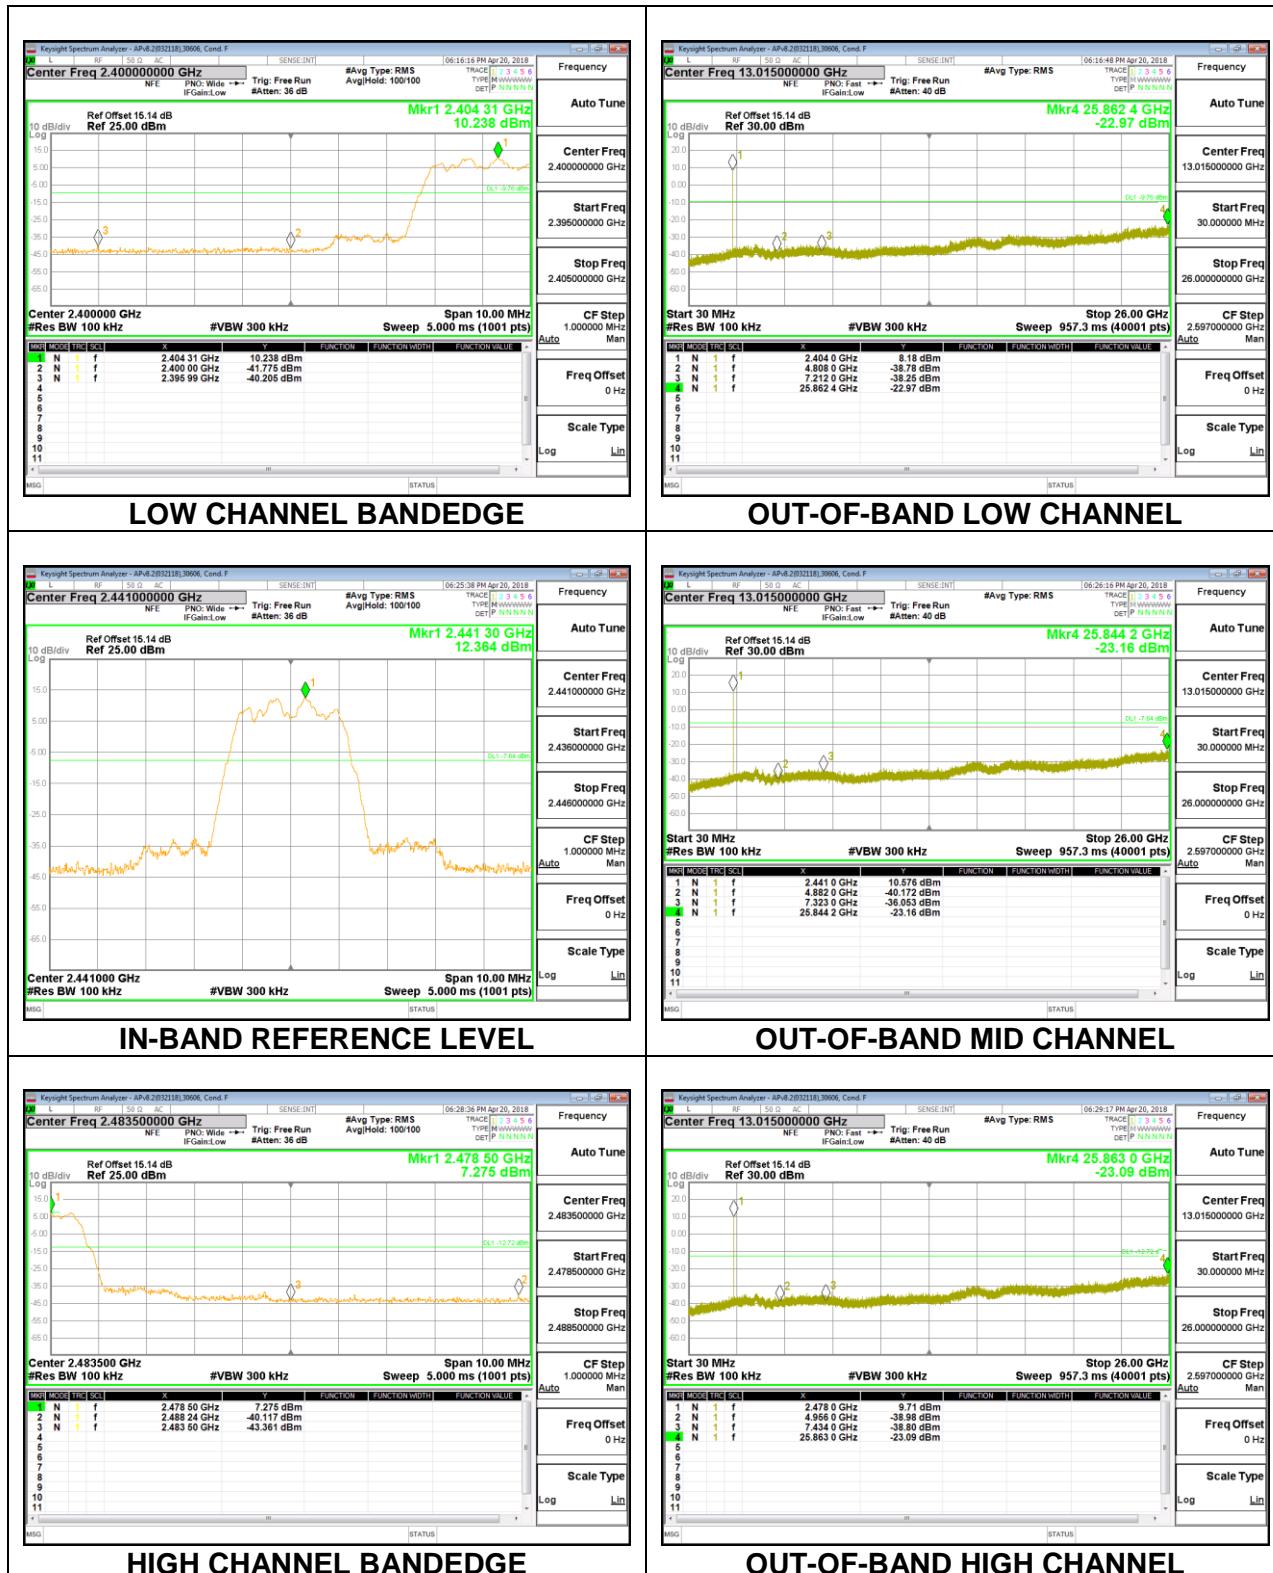


8.7.2. HIGH POWER HDR8

Antenna 4

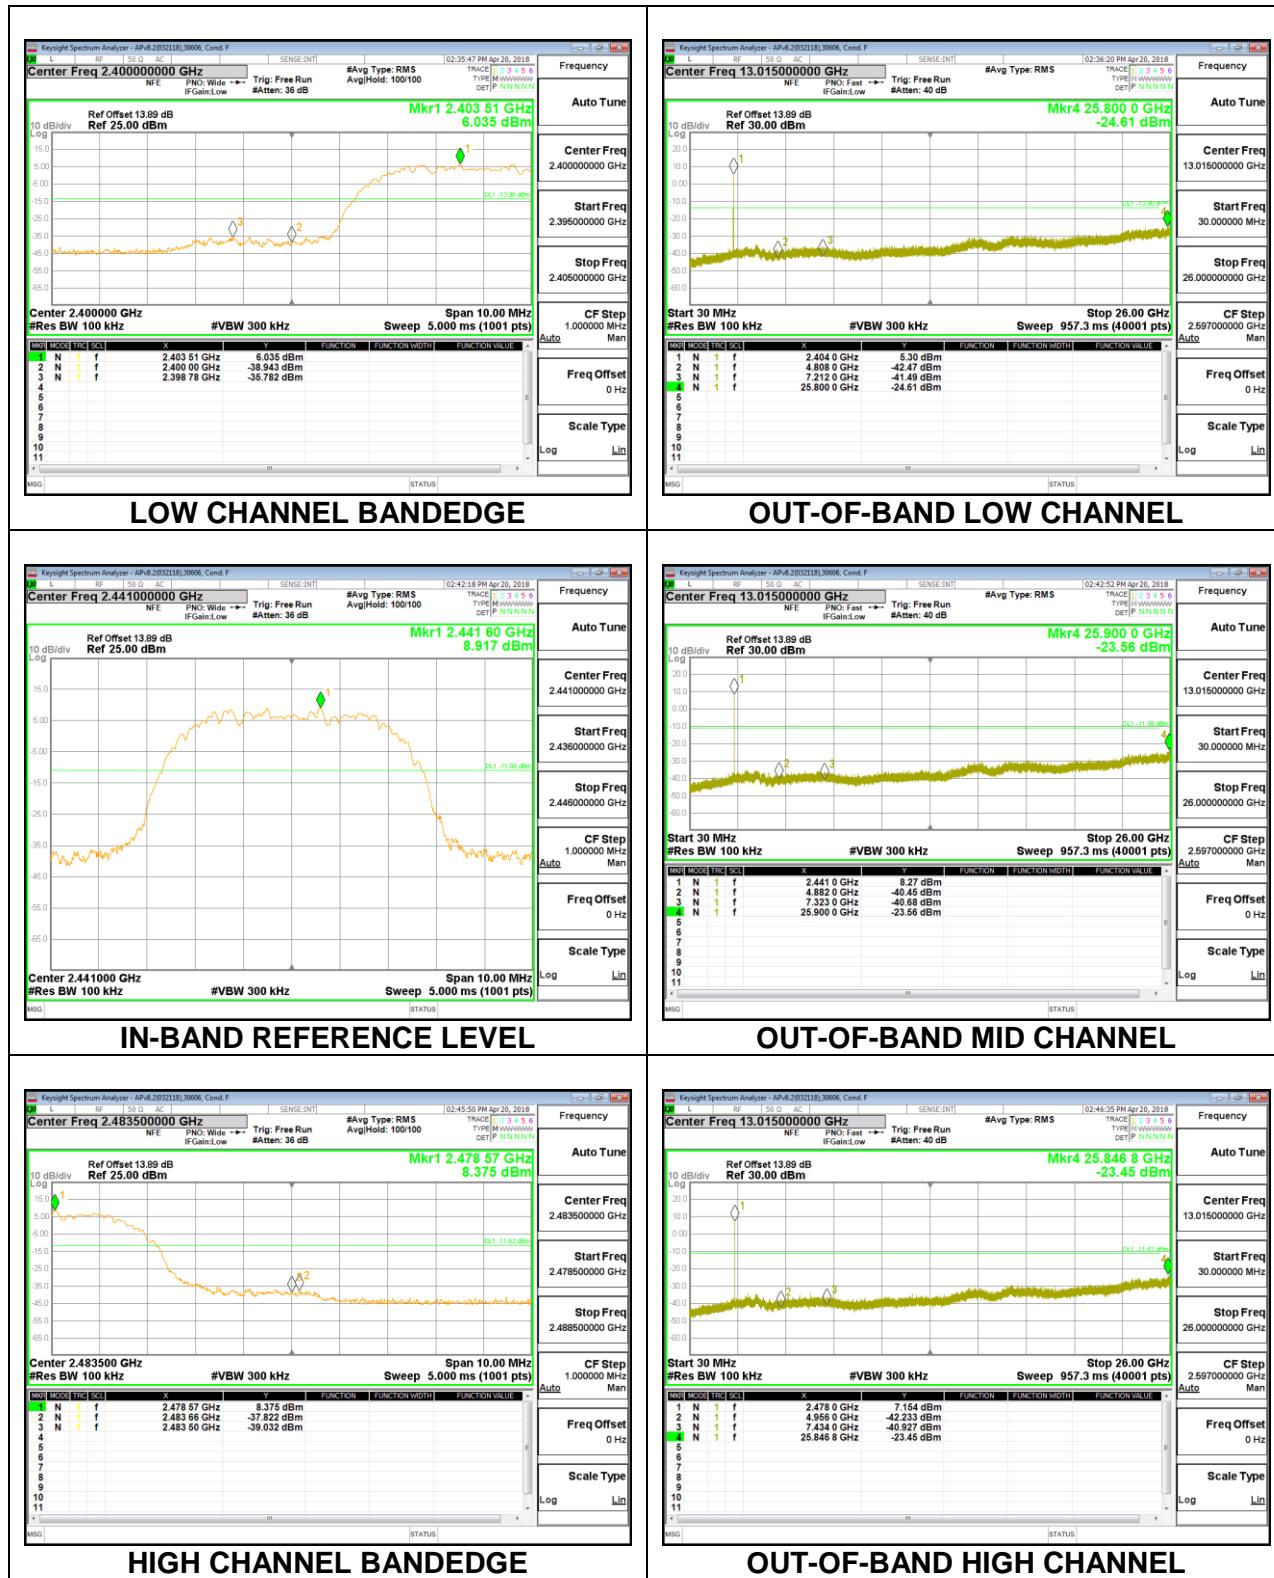


Antenna 3

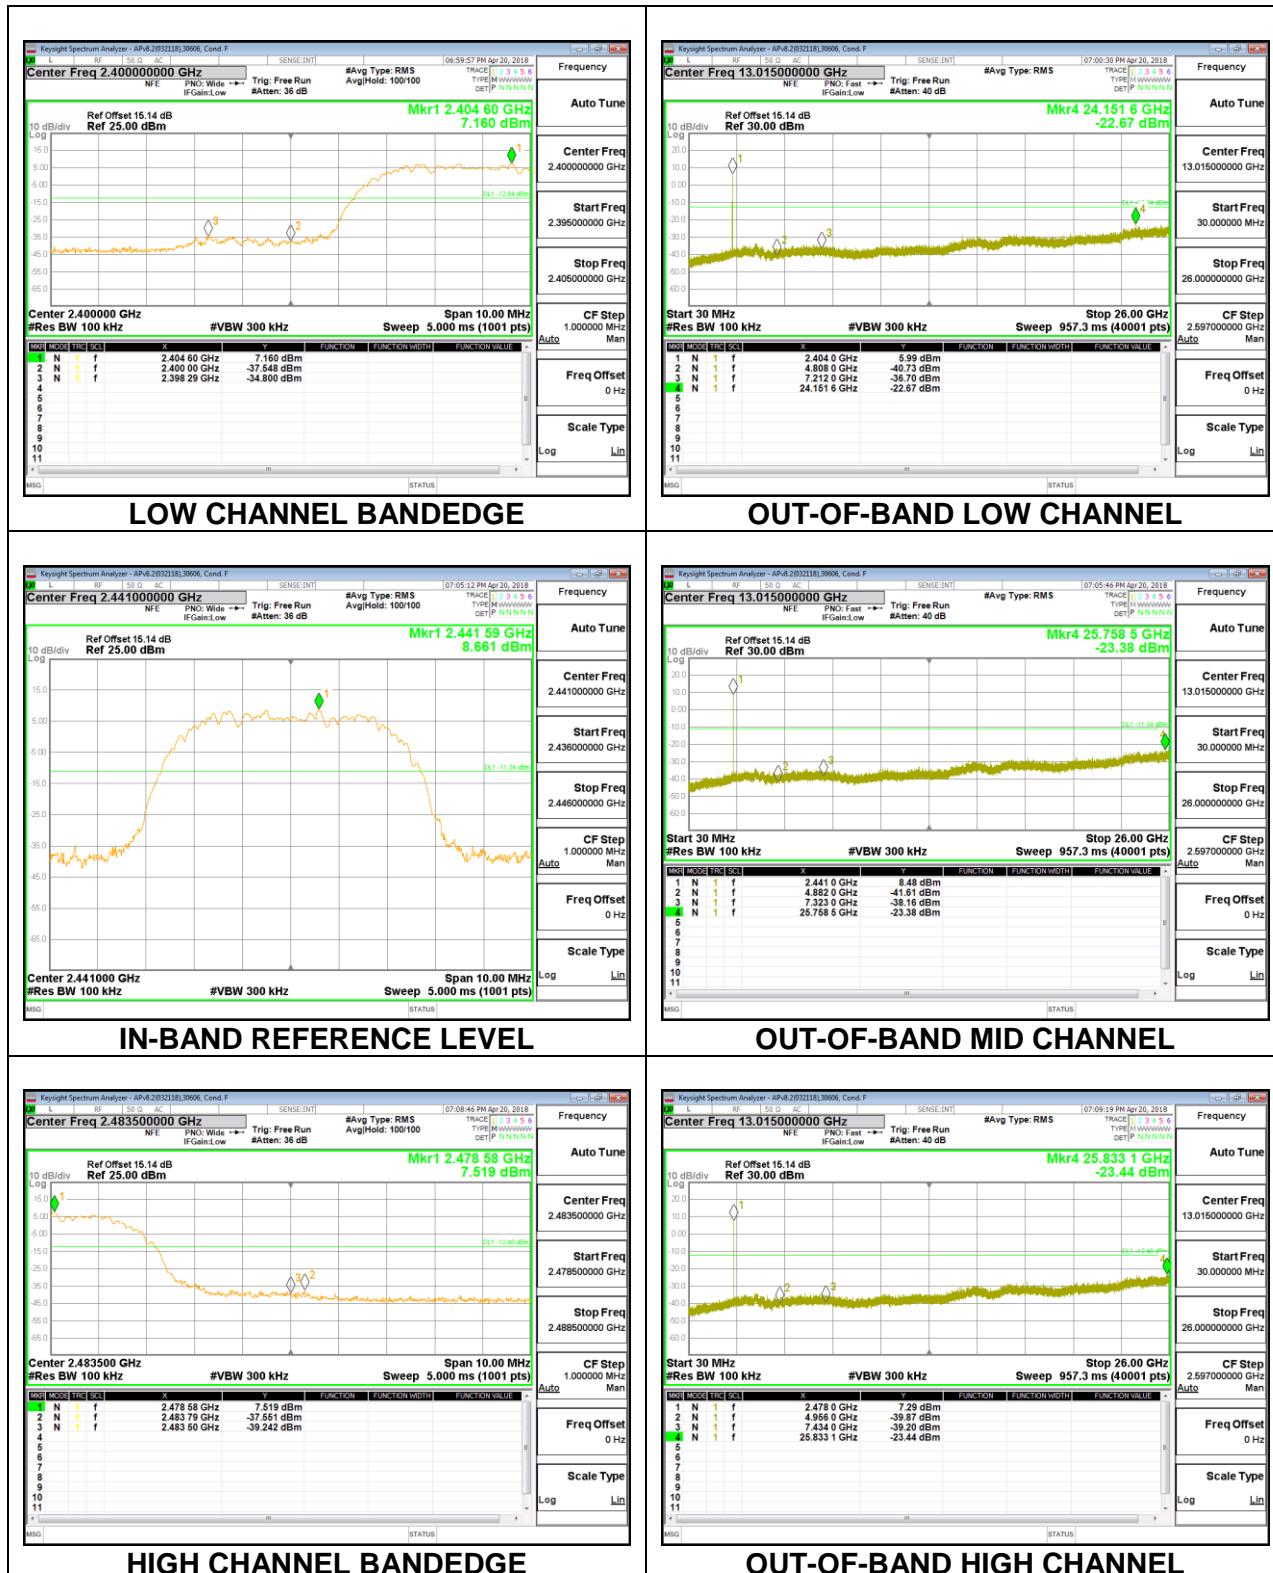


8.7.3. LOW POWER HDR4

Antenna 4

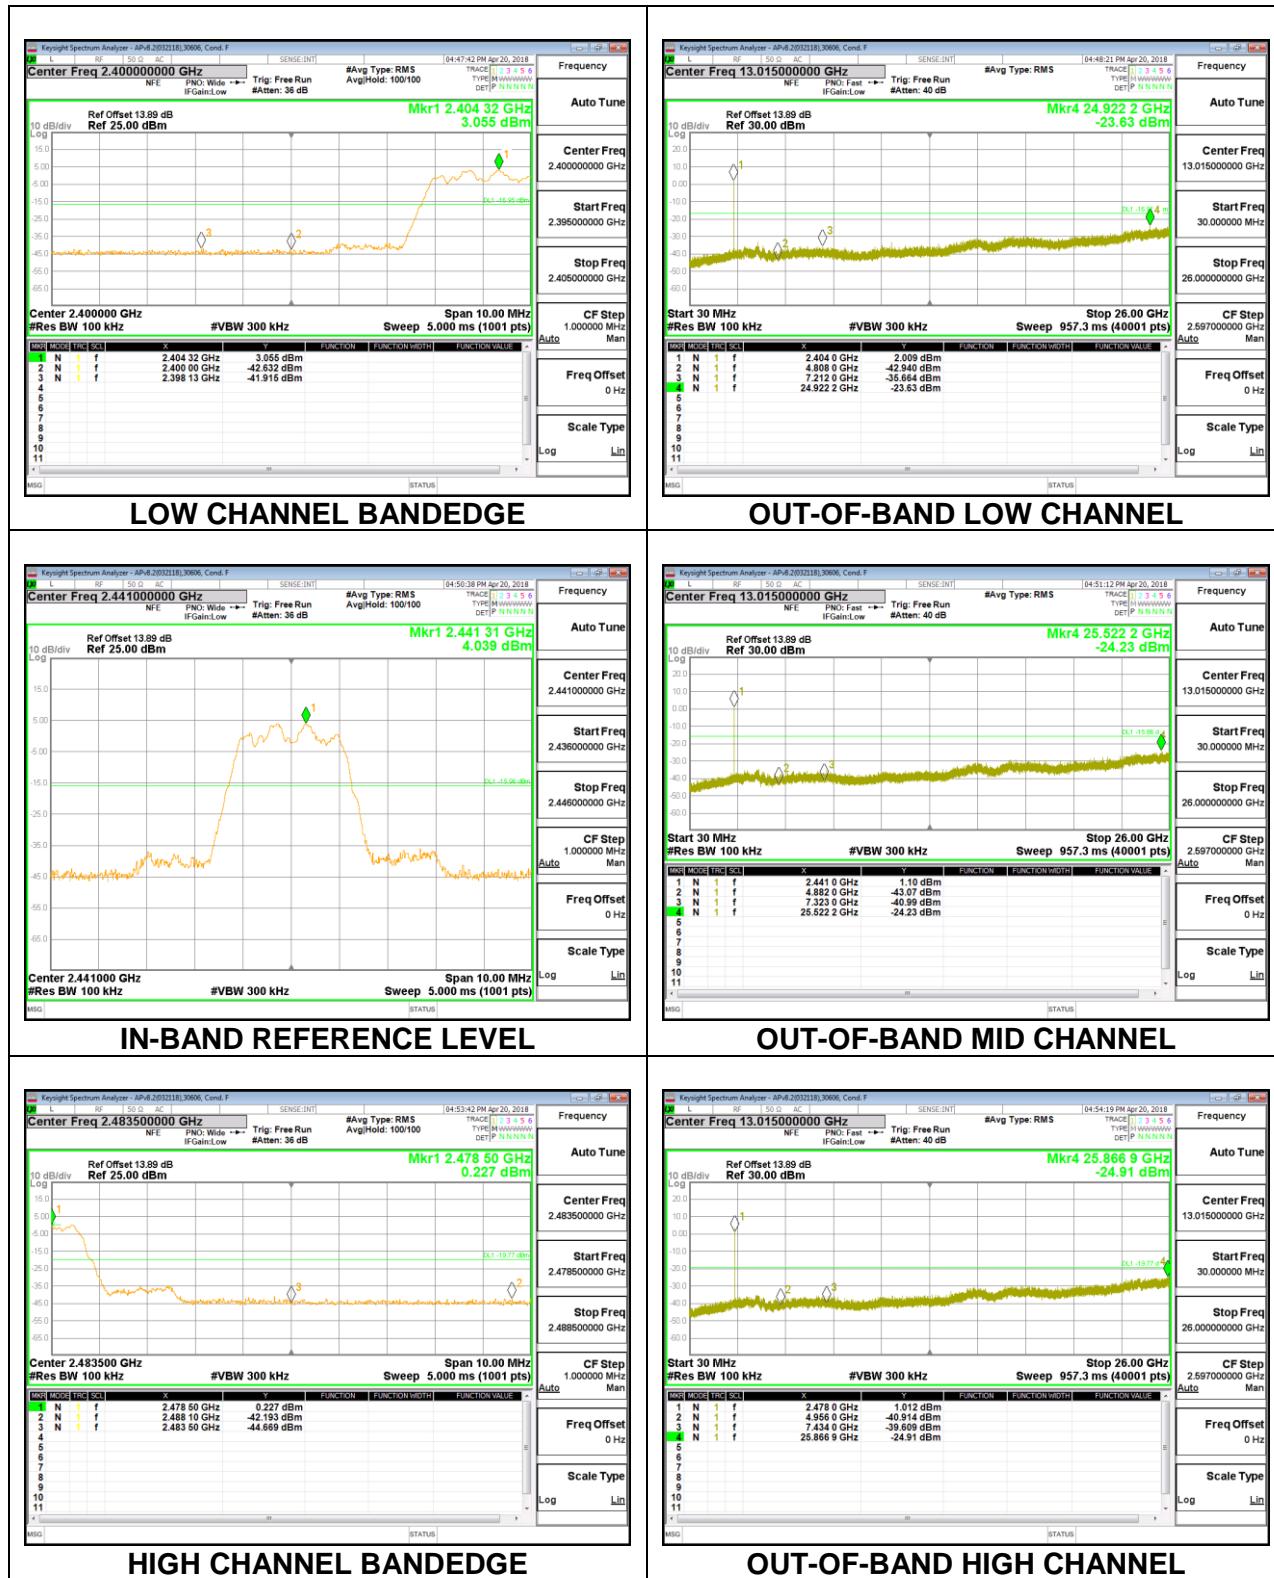


Antenna 3

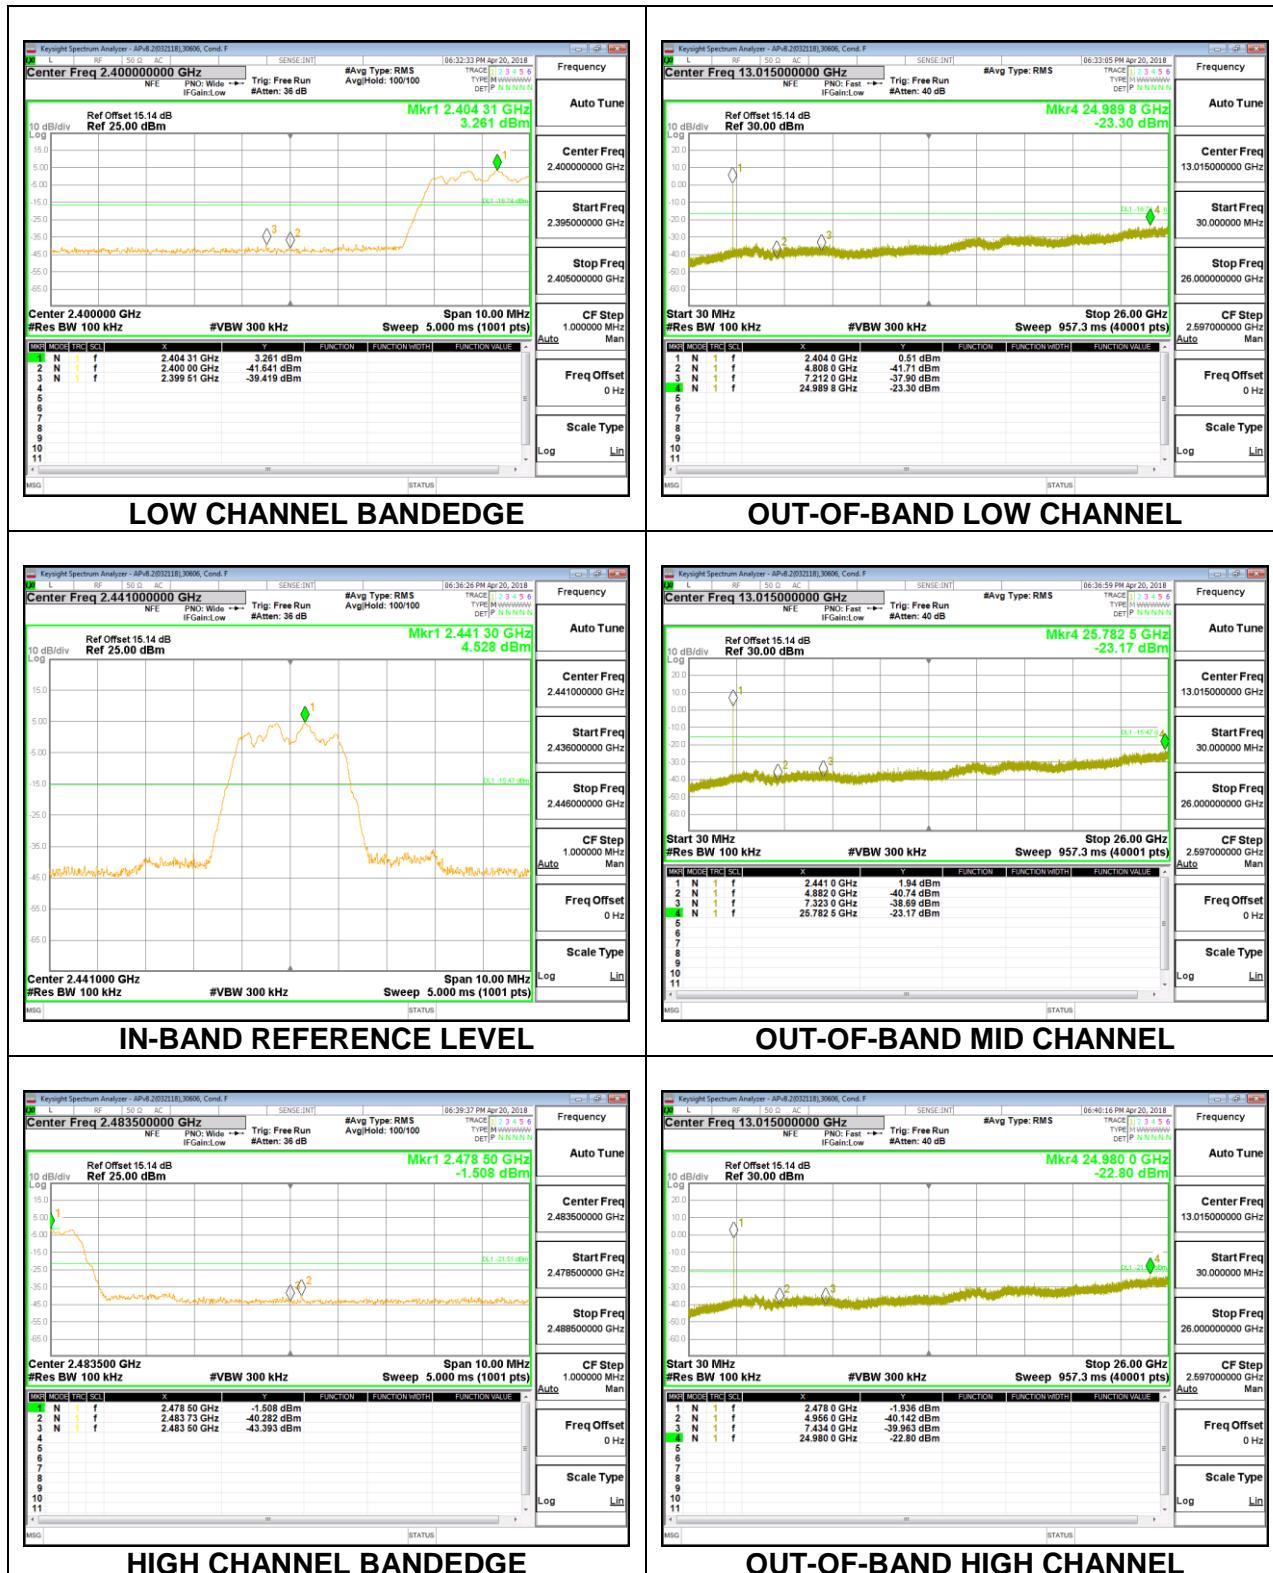

8.7.4. LOW POWER HDR8

Antenna 4

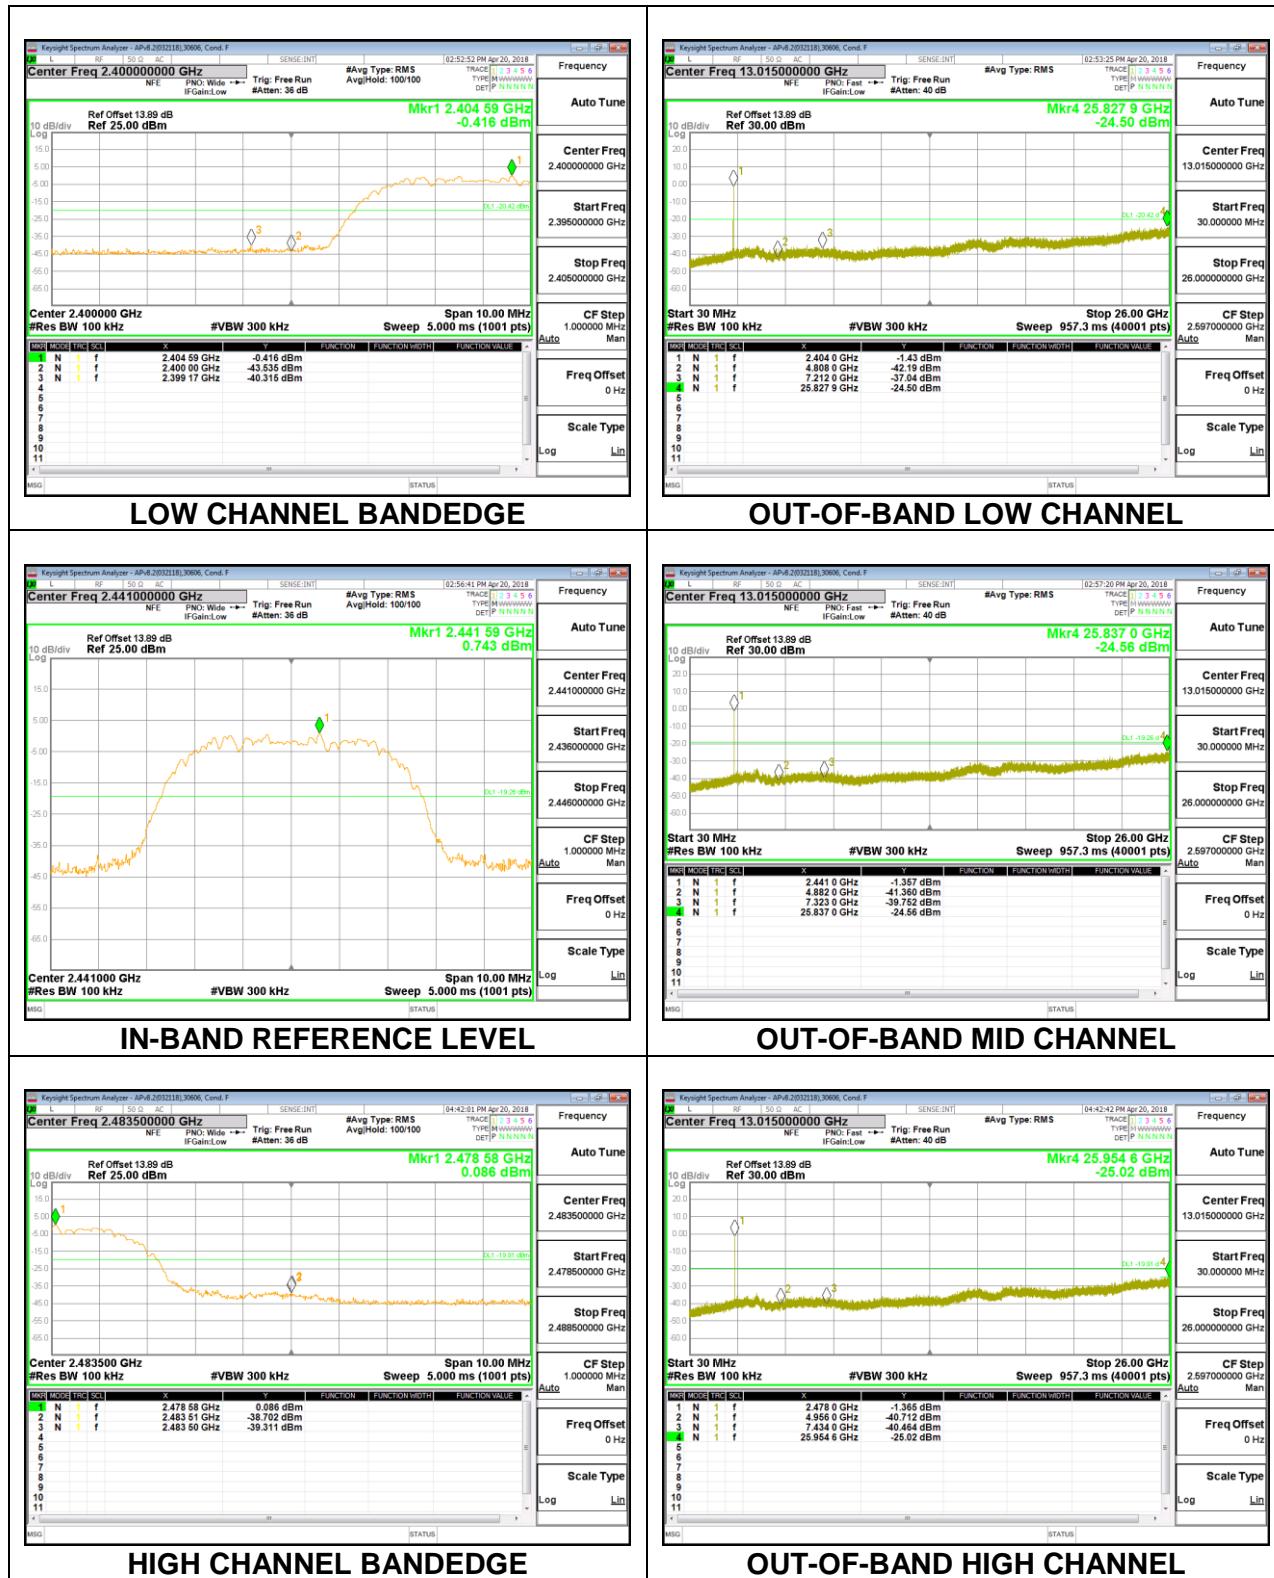

Antenna 3

