


VERTICAL RESULT

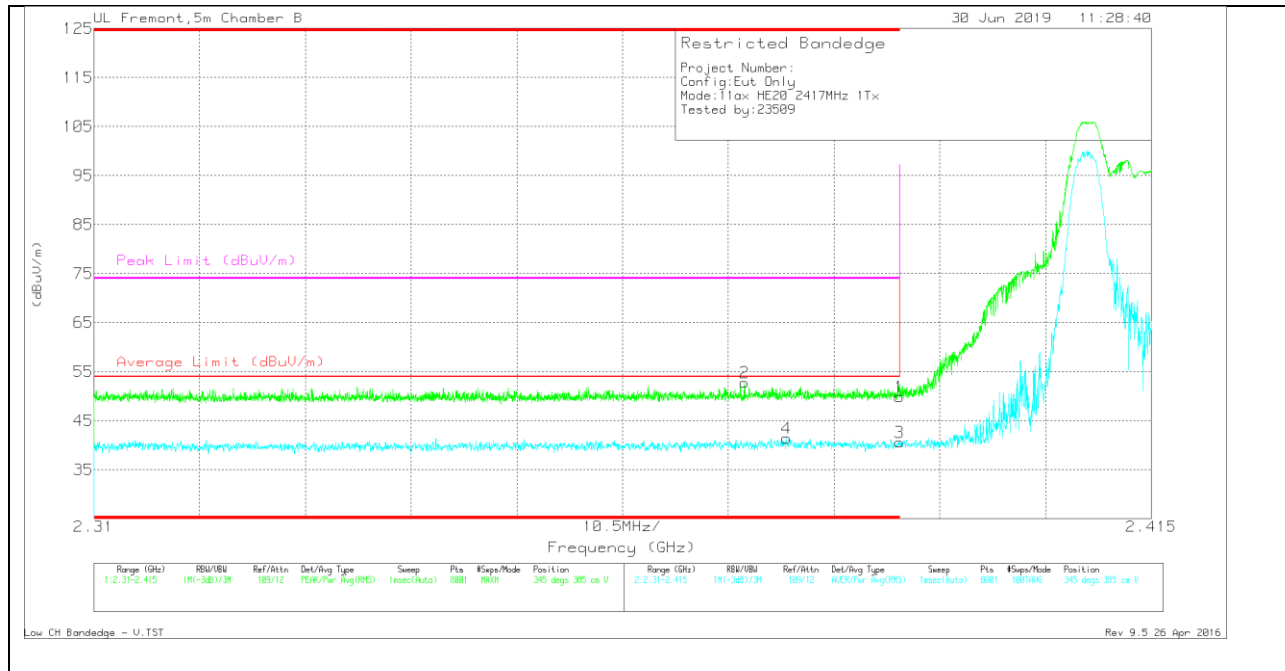

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.375	39.89	Pk	31.8	-18.9	52.79	-	-	74	-21.21	345	385	V
4	* 2.379	28.41	RMS	31.8	-18.8	41.41	54	-12.59	-	-	345	385	V
1	* 2.39	36.87	Pk	31.9	-18.9	49.87	-	-	74	-24.13	345	385	V
3	* 2.39	27.61	RMS	31.9	-18.9	40.61	54	-13.39	-	-	345	385	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

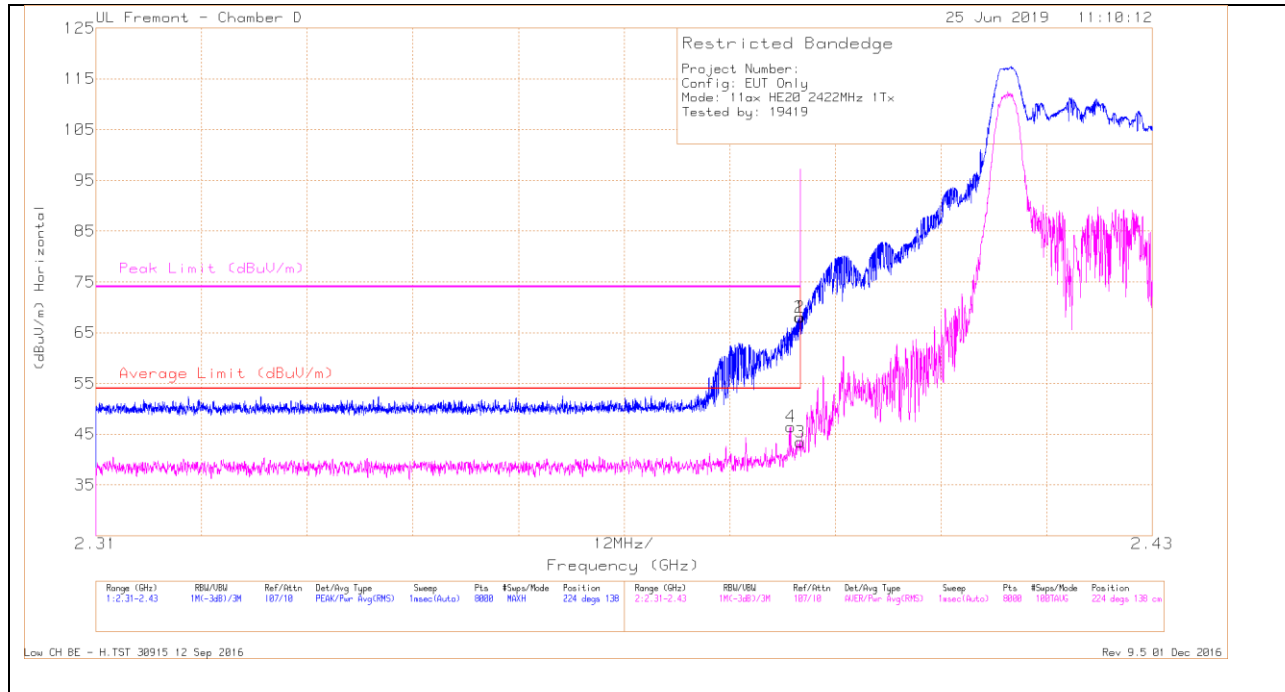


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	56.7	Pk	32	-20.6	68.1	-	-	74	-5.9	224	138	H
2	* 2.39	56.61	PK	32	-20.6	68.01	-	-	74	-5.99	224	138	H
3	* 2.39	32.07	RMS	32	-20.6	43.47	54	-10.53	-	-	224	138	H
4	* 2.389	35.1	RMS	32	-20.6	46.5	54	-7.5	-	-	224	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

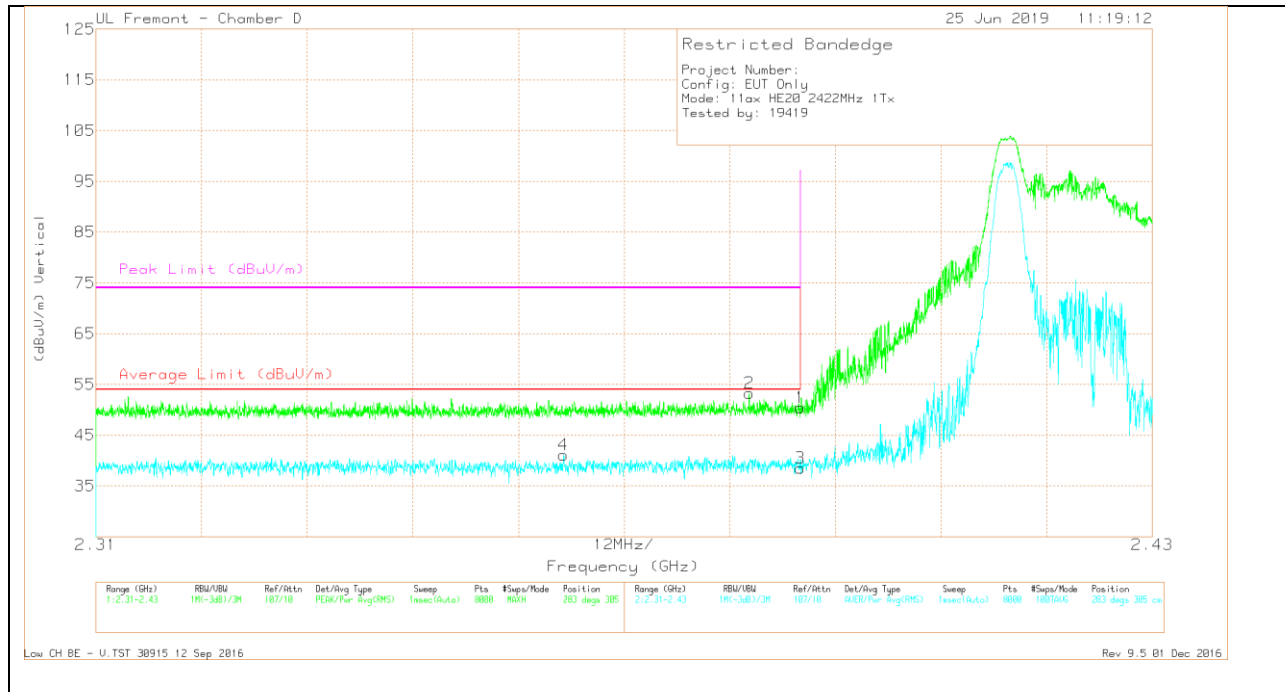


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/CbI/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.02	Pk	32	-20.6	50.42	-	-	74	-23.58	283	305	V
2	* 2.384	41.88	Pk	32	-20.6	53.28	-	-	74	-20.72	283	305	V
3	* 2.39	27.06	RMS	32	-20.6	38.46	54	-15.54	-	-	283	305	V
4	* 2.363	29.97	RMS	31.8	-20.7	41.07	54	-12.93	-	-	283	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Antenna 4 LEGACY SISO MODE: 26-Tones, RU Index 8
BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

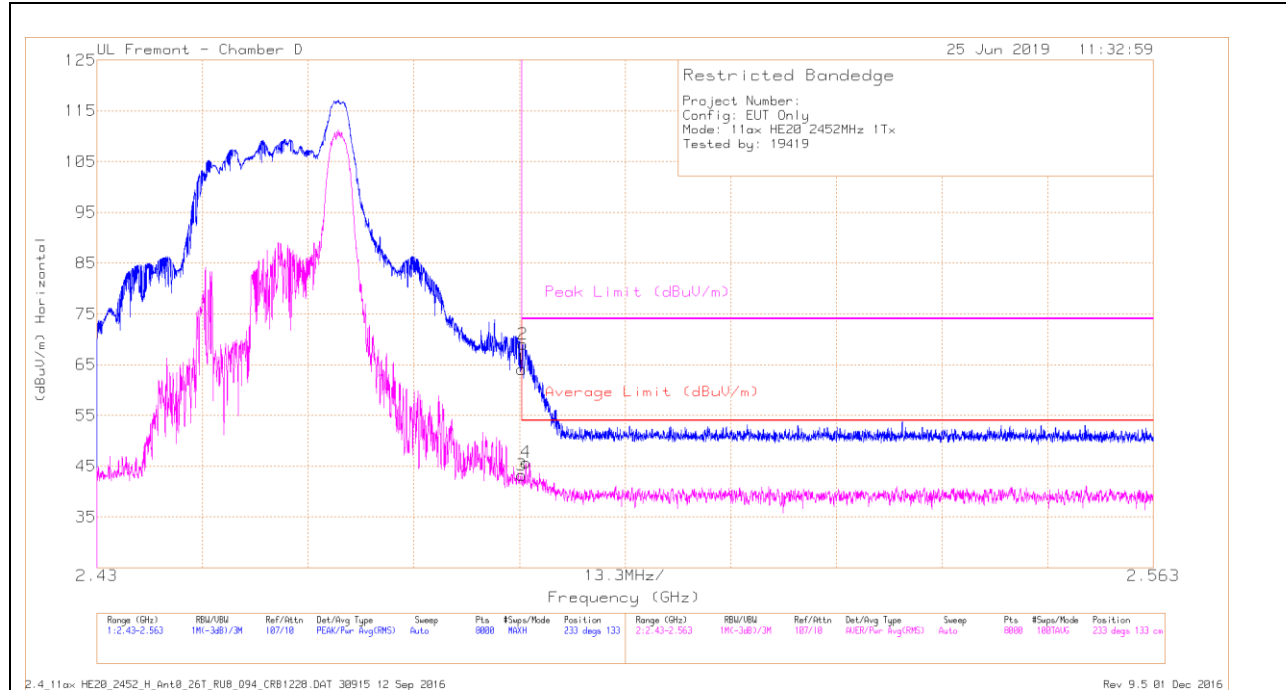

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.26	Pk	32.4	-20.6	64.06	-	-	74	-9.94	233	133	H
2	* 2.484	57.21	PK	32.4	-20.6	69.01	-	-	74	-4.99	233	133	H
3	* 2.484	31.45	RMS	32.4	-20.6	43.25	54	-10.75	-	-	233	133	H
4	* 2.484	34.06	RMS	32.3	-20.6	45.76	54	-8.24	-	-	233	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

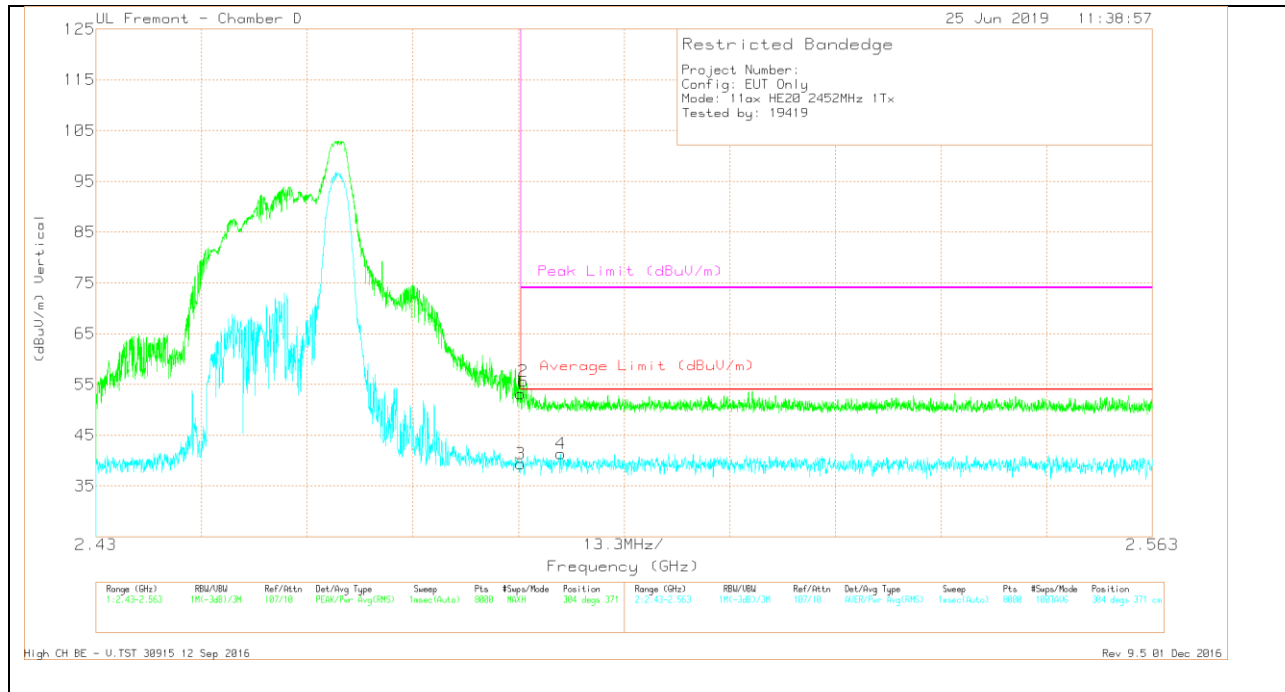

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/CbI/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.34	Pk	32.4	-20.6	53.14	-	-	74	-20.86	304	371	V
2	* 2.484	43.78	Pk	32.4	-20.6	55.58	-	-	74	-18.42	304	371	V
3	* 2.484	27.62	RMS	32.4	-20.6	39.42	54	-14.58	-	-	304	371	V
4	* 2.489	29.67	RMS	32.3	-20.6	41.37	54	-12.63	-	-	304	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

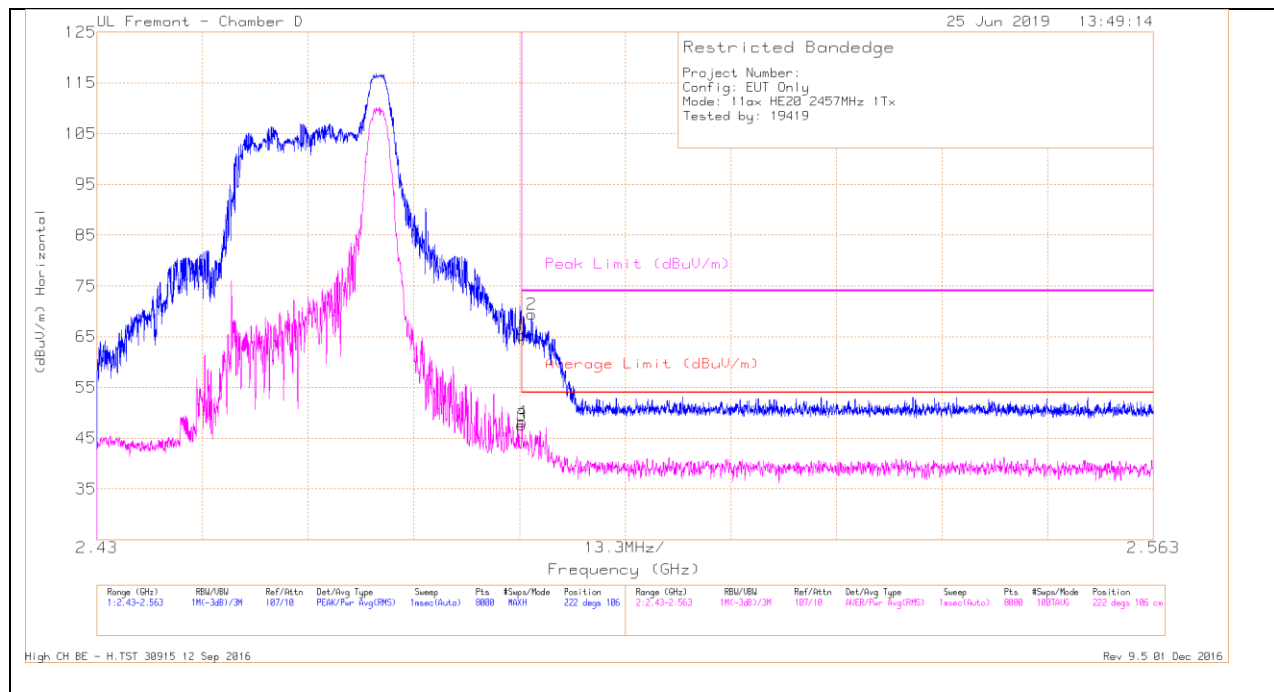


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.49	Pk	32.4	-20.6	65.29	-	-	74	-8.71	222	106	H
2	* 2.485	57.69	Pk	32.3	-20.6	69.39	-	-	74	-4.61	222	106	H
3	* 2.484	35.79	RMS	32.4	-20.6	47.59	54	-6.41	-	-	222	106	H
4	* 2.484	36.42	RMS	32.4	-20.6	48.22	54	-5.78	-	-	222	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

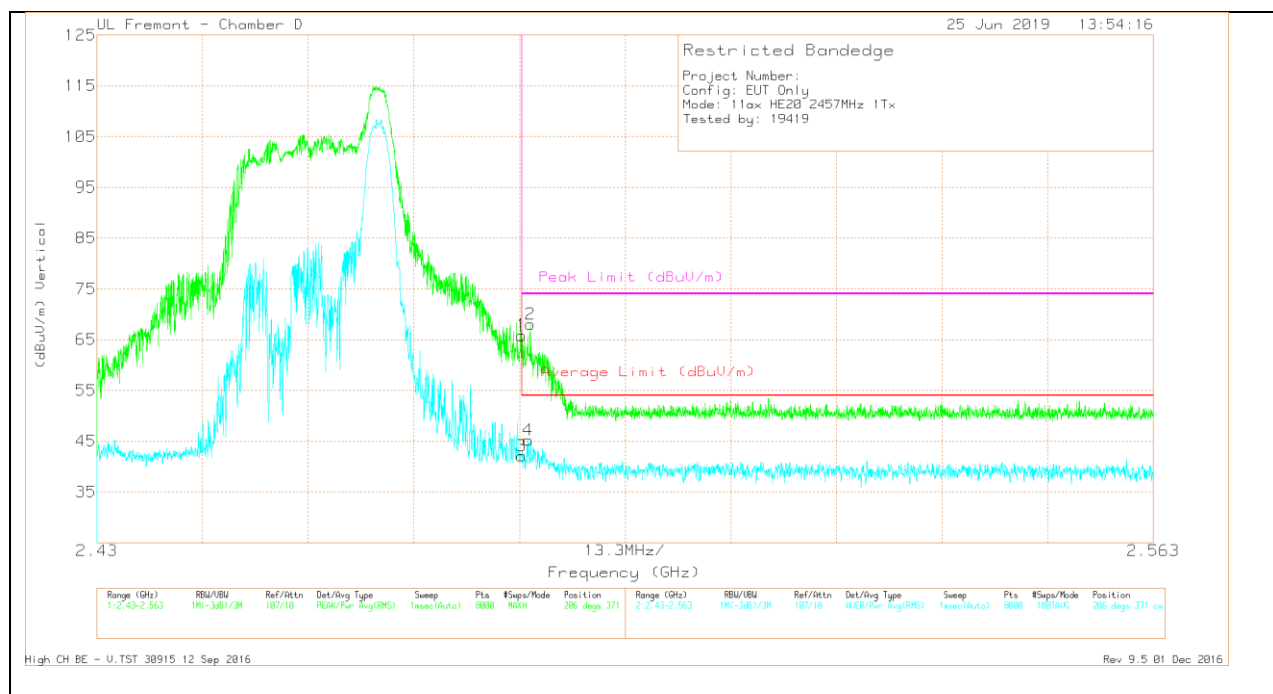

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.07	Pk	32.4	-20.6	65.87	-	-	74	-8.13	206	371	V
2	* 2.485	56.37	Pk	32.3	-20.6	68.07	-	-	74	-5.93	206	371	V
3	* 2.484	30.34	RMS	32.4	-20.6	42.14	54	-11.86	-	-	206	371	V
4	* 2.484	33.5	RMS	32.3	-20.6	45.2	54	-8.8	-	-	206	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

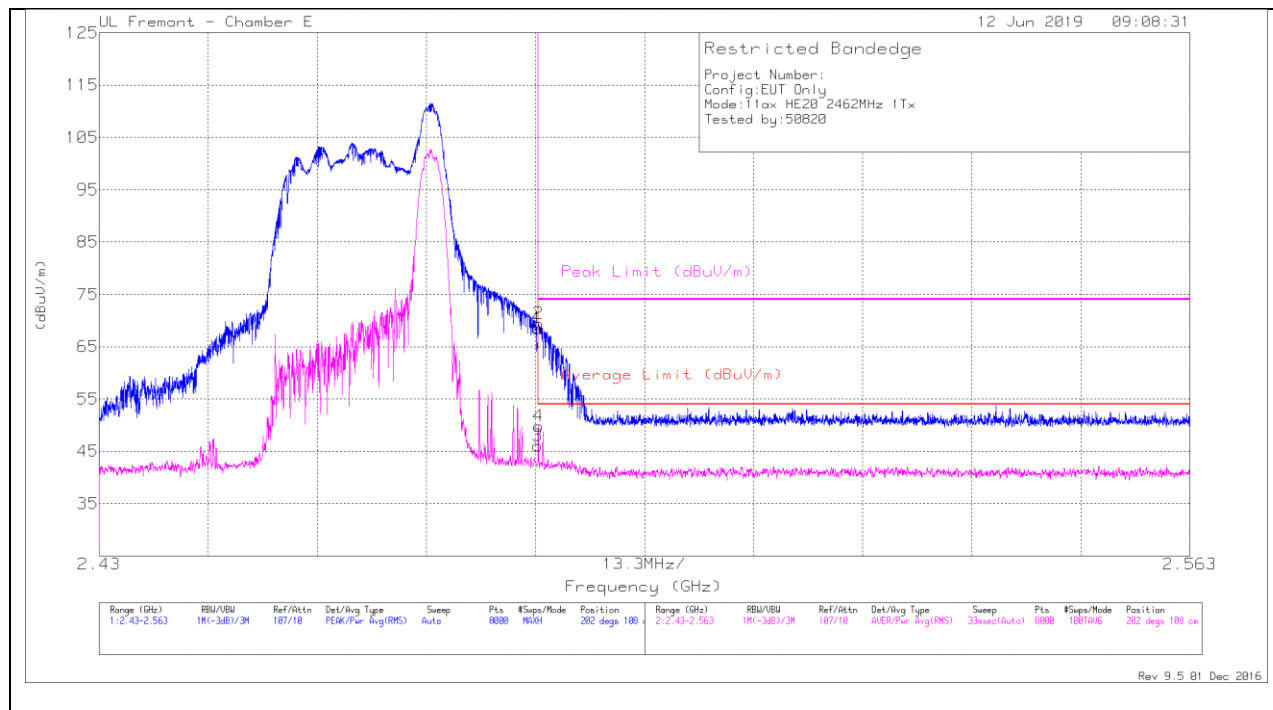


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	62.02	Pk	32.8	-26.3	68.52	-	-	74	-5.48	202	108	H
2	* 2.484	62.87	Pk	32.8	-26.3	69.37	-	-	74	-4.63	202	108	H
3	* 2.484	39.62	RMS	32.8	-26.3	46.12	54	-7.88	-	-	202	108	H
4	* 2.484	43.26	RMS	32.8	-26.3	49.76	54	-4.24	-	-	202	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

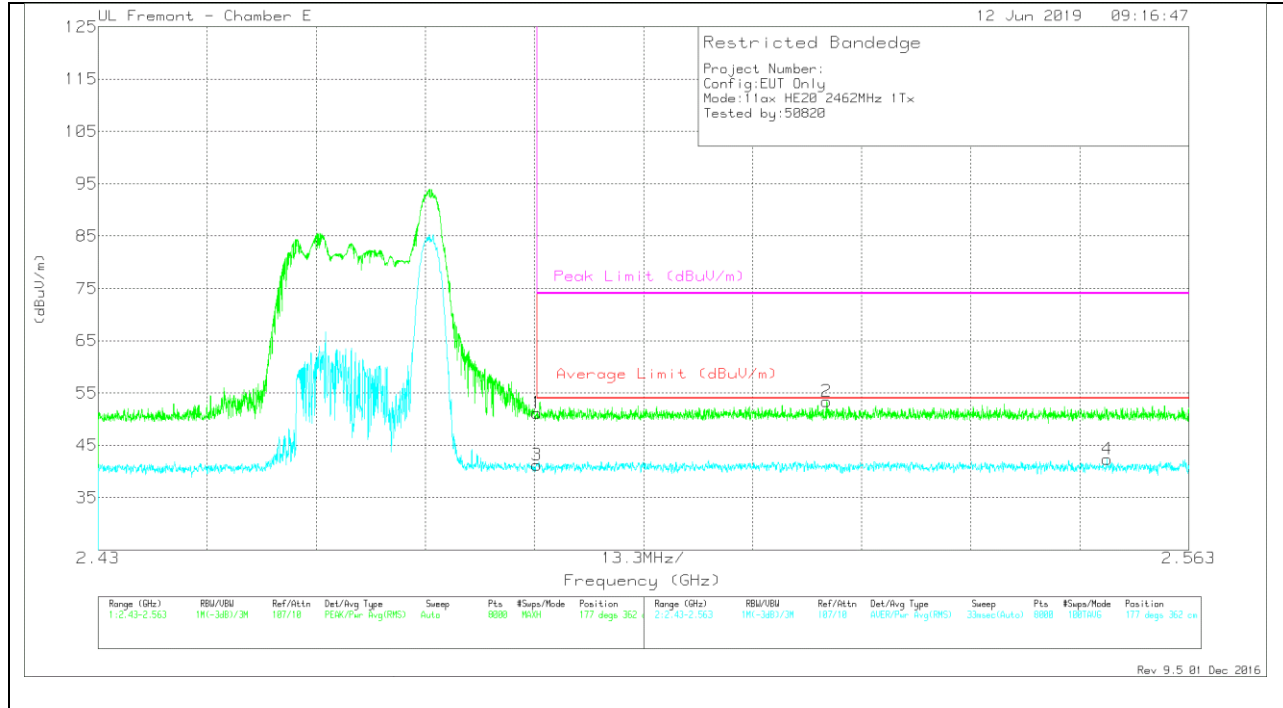

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.64	Pk	32.8	-26.3	51.14	-	-	74	-22.86	177	362	V
3	* 2.484	34.77	RMS	32.8	-26.3	41.27	54	-12.73	-	-	177	362	V
2	2.519	46.72	Pk	32.9	-26.2	53.42	-	-	74	-20.58	177	362	V
4	2.553	35.86	RMS	32.8	-26.3	42.36	54	-11.64	-	-	177	362	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

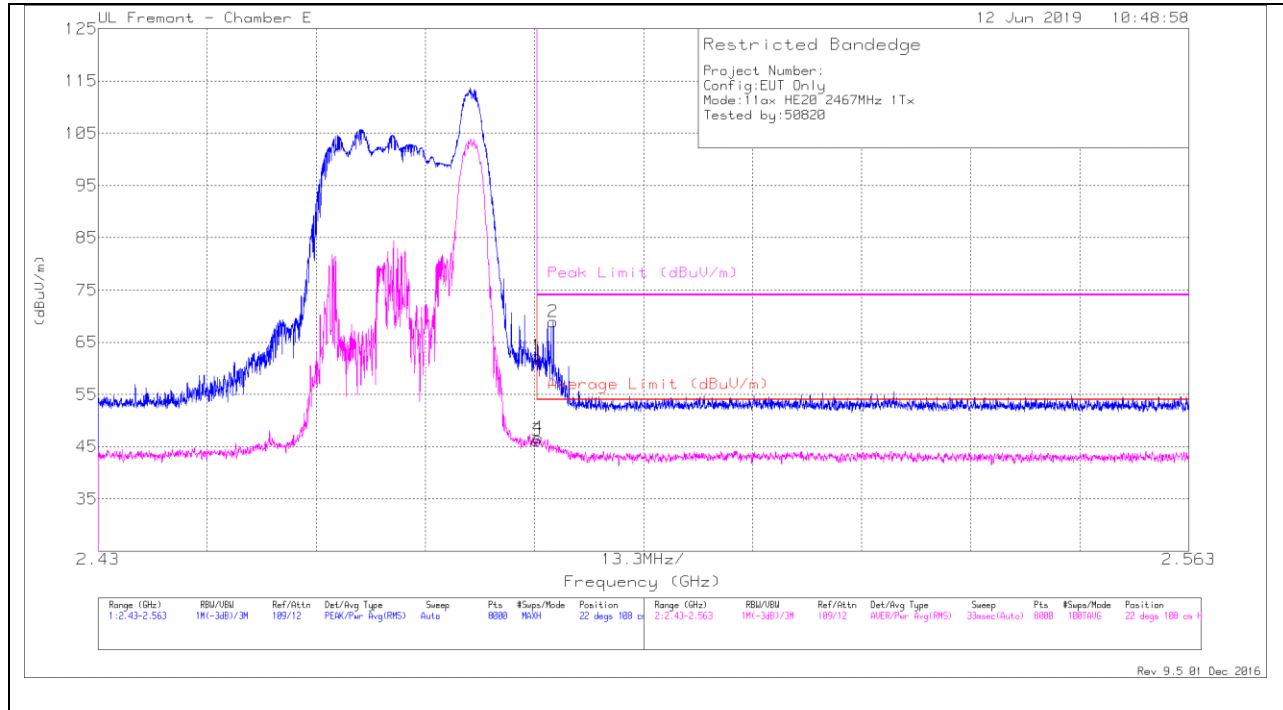


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.59	Pk	32.8	-18.1	62.29	-	-	74	-11.71	22	108	H
3	* 2.484	31.49	RMS	32.8	-18.1	46.19	54	-7.81	-	-	22	108	H
4	* 2.484	31.95	RMS	32.8	-18.1	46.65	54	-7.35	-	-	22	108	H
2	* 2.485	54.3	Pk	32.8	-18.2	68.9	-	-	74	-5.1	22	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

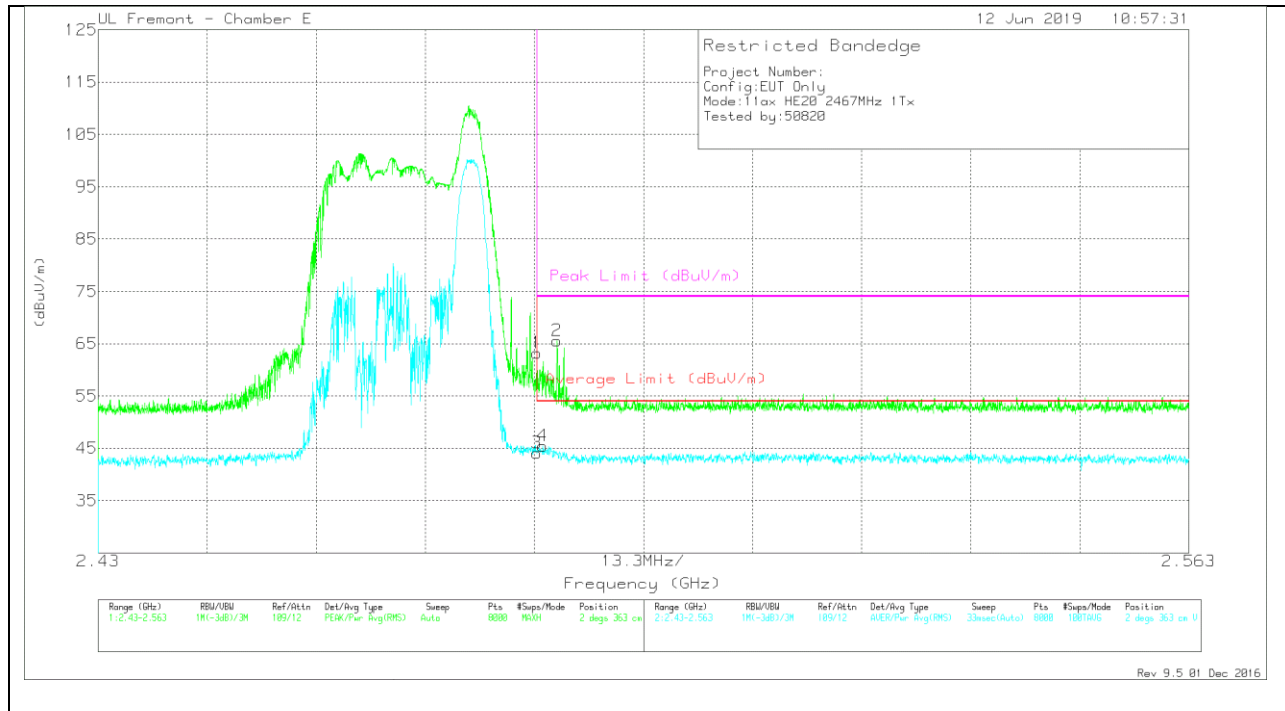

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.54	Pk	32.8	-18.1	63.24	-	-	74	-10.76	2	363	V
3	* 2.484	29.42	RMS	32.8	-18.1	44.12	54	-9.88	-	-	2	363	V
4	* 2.484	30.78	RMS	32.8	-18.1	45.48	54	-8.52	-	-	2	363	V
2	* 2.486	50.99	Pk	32.8	-18.2	65.59	-	-	74	-8.41	2	363	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

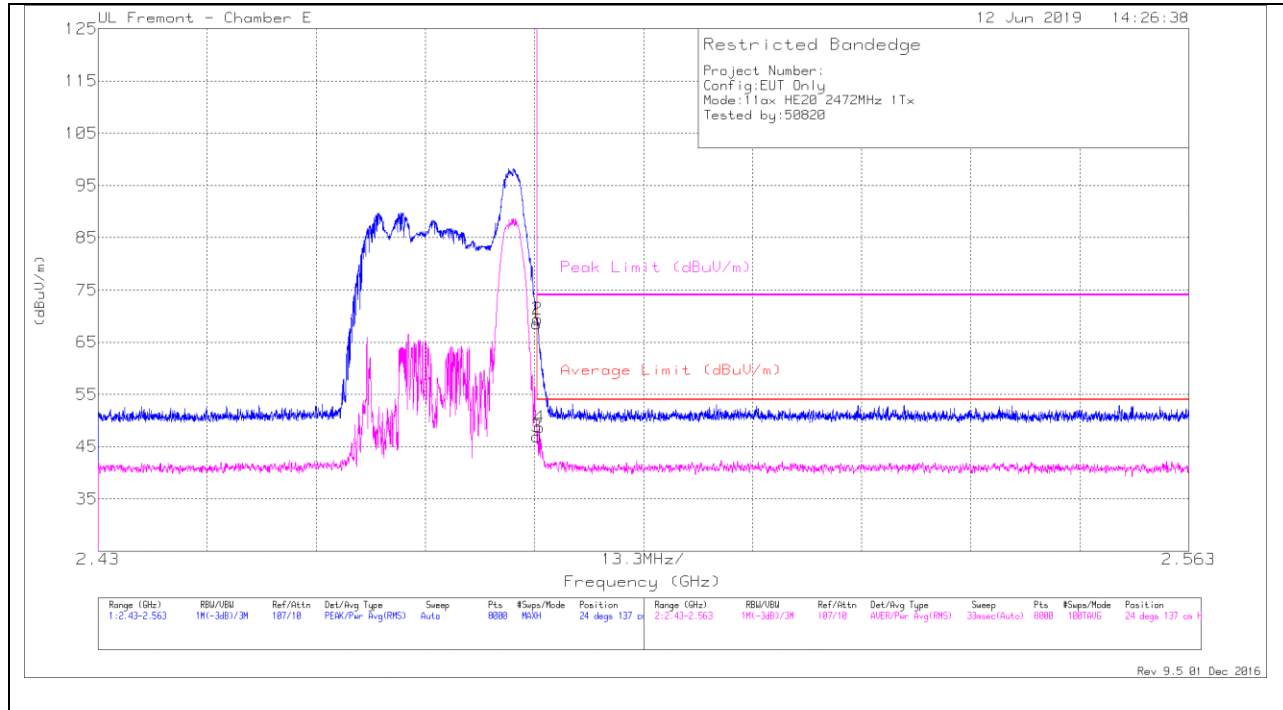


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	62.08	Pk	32.8	-26.3	68.58	-	-	74	-5.42	24	137	H
2	* 2.484	62.86	Pk	32.8	-26.3	69.36	-	-	74	-4.64	24	137	H
3	* 2.484	40.47	RMS	32.8	-26.3	46.97	54	-7.03	-	-	24	137	H
4	* 2.484	42.15	RMS	32.8	-26.3	48.65	54	-5.35	-	-	24	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

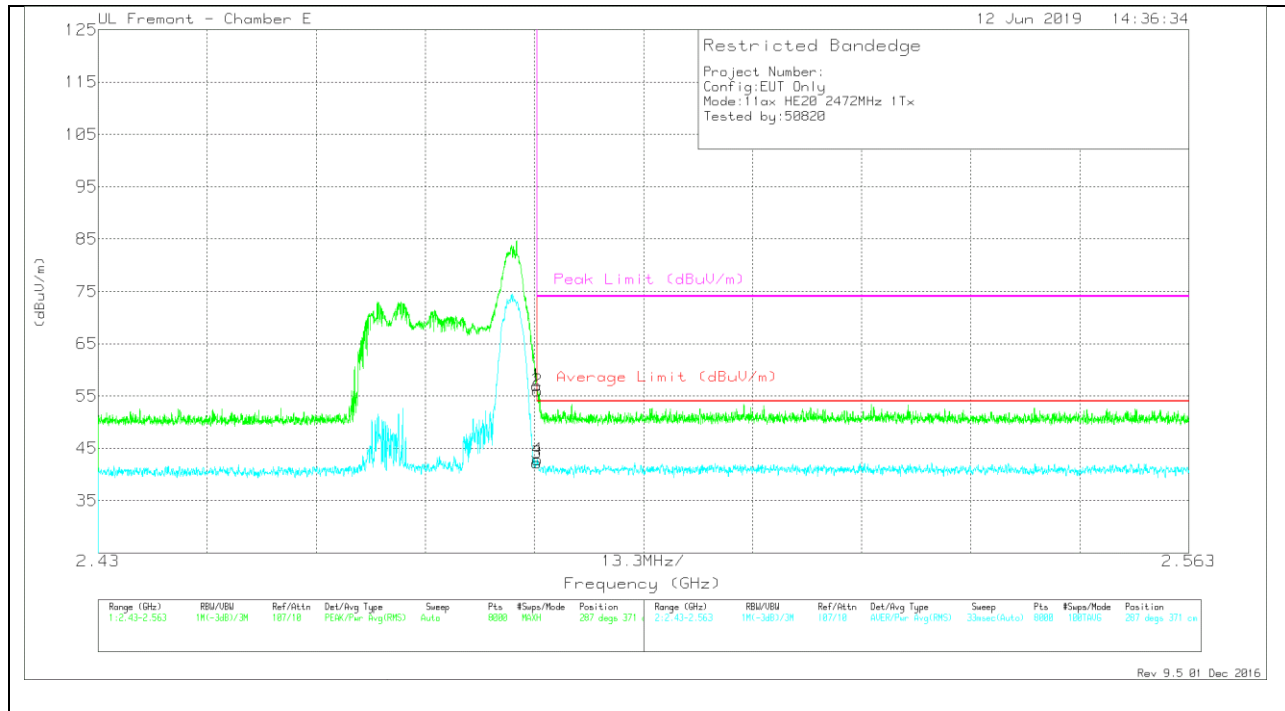

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.48	Pk	32.8	-26.3	56.95	-	-	74	-17.02	287	371	V
2	* 2.484	49.52	Pk	32.8	-26.3	56.02	-	-	74	-17.98	287	371	V
3	* 2.484	35.77	RMS	32.8	-26.3	42.27	54	-11.73	-	-	287	371	V
4	* 2.484	36.35	RMS	32.8	-26.3	42.85	54	-11.15	-	-	287	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 4 LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

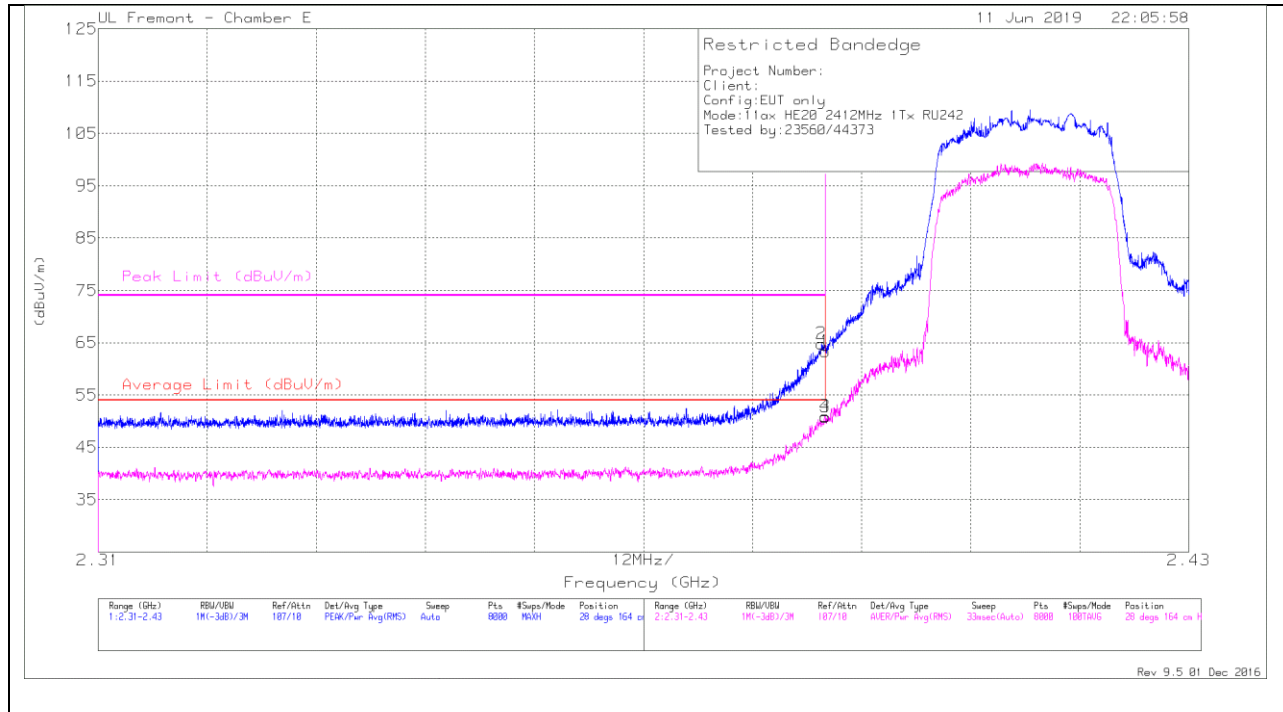


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	57.22	Pk	32.3	-26.2	63.32	-	-	74	-10.68	28	164	H
2	* 2.39	58.67	Pk	32.3	-26.2	64.77	-	-	74	-9.23	28	164	H
3	* 2.39	44.75	RMS	32.3	-26.2	50.85	54	-3.15	-	-	28	164	H
4	* 2.39	44.86	RMS	32.3	-26.2	50.96	54	-3.04	-	-	28	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

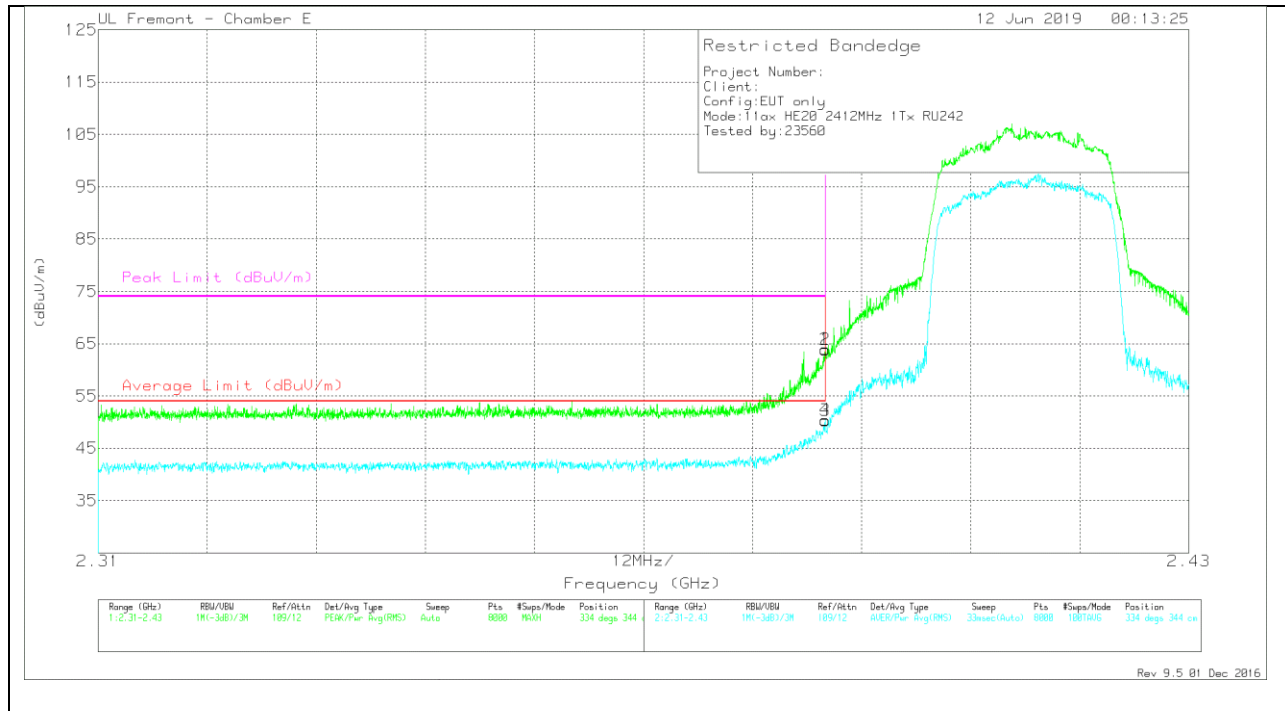

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.98	Pk	32.3	-18.3	63.98	-	-	74	-10.02	334	344	V
2	* 2.39	49.79	Pk	32.3	-18.3	63.79	-	-	74	-10.21	334	344	V
3	* 2.39	36.25	RMS	32.3	-18.3	50.25	54	-3.75	-	-	334	344	V
4	* 2.39	36.4	RMS	32.3	-18.3	50.4	54	-3.6	-	-	334	344	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

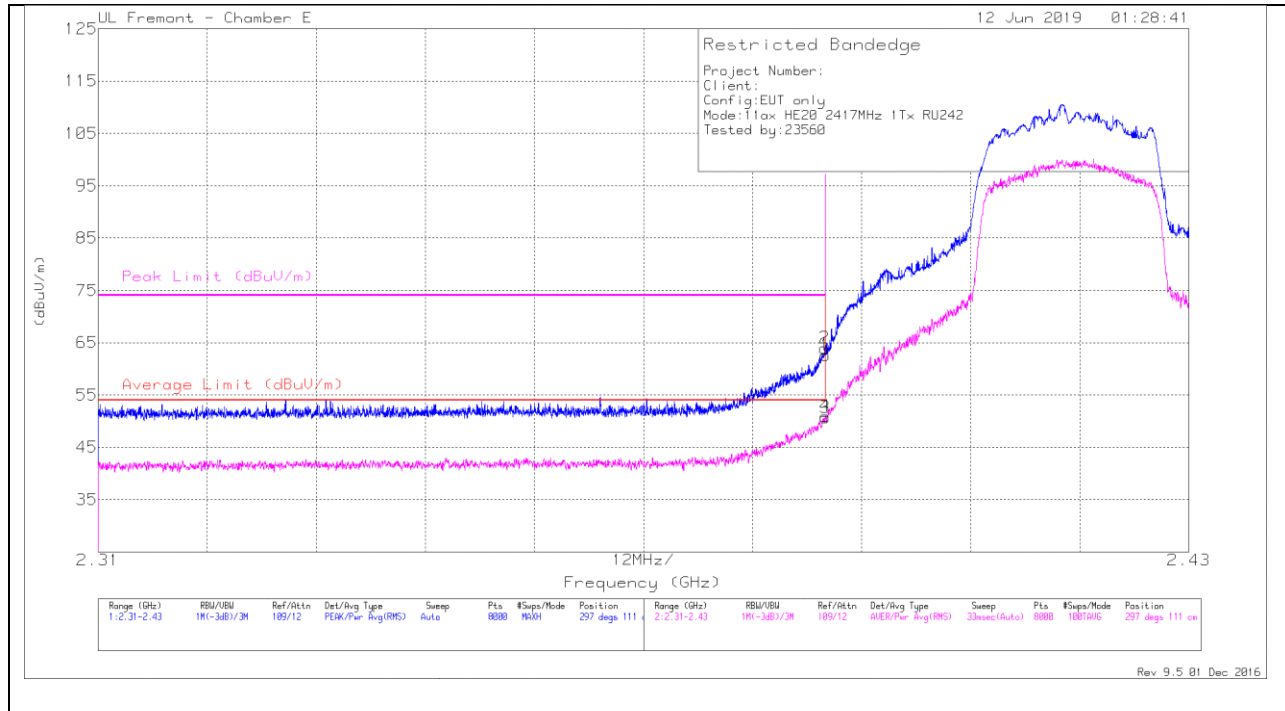


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.64	Pk	32.3	-18.3	62.64	-	-	74	-11.36	297	111	H
2	* 2.39	49.92	Pk	32.3	-18.3	63.92	-	-	74	-10.08	297	111	H
3	* 2.39	36.71	RMS	32.3	-18.3	50.71	54	-3.29	-	-	297	111	H
4	* 2.39	36.94	RMS	32.3	-18.3	50.94	54	-3.06	-	-	297	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

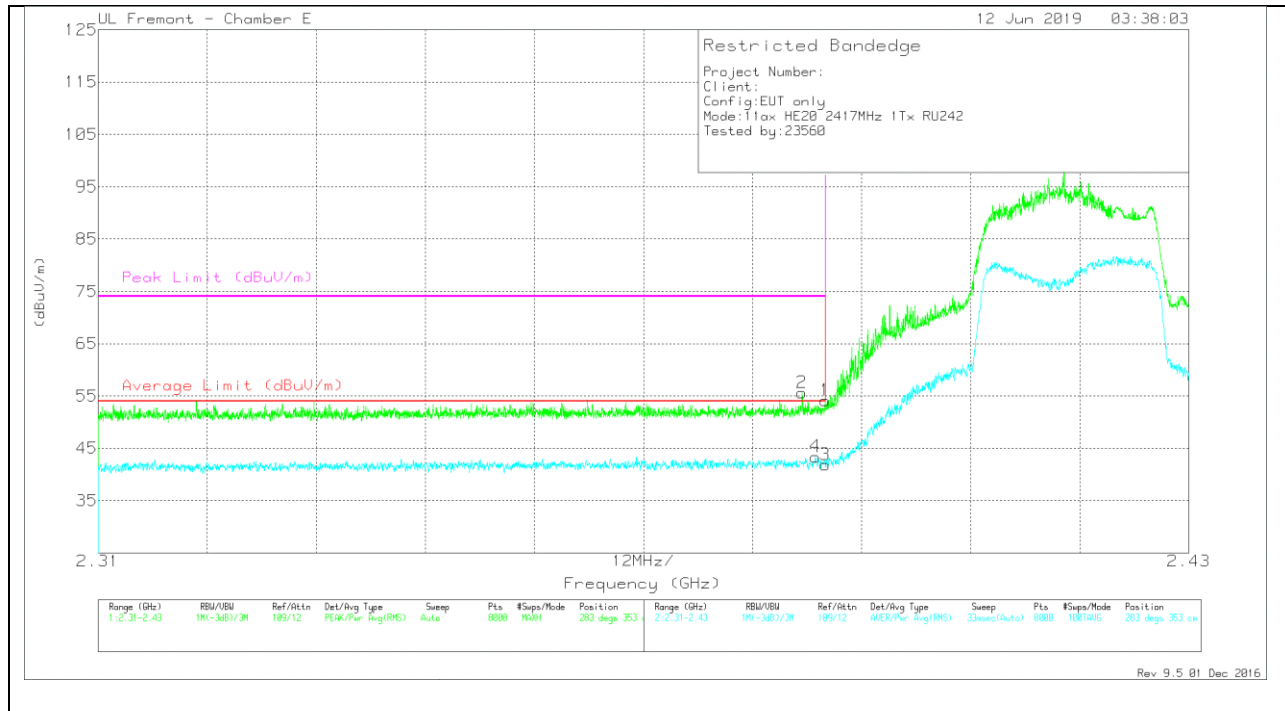

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.387	41.68	Pk	32.3	-18.3	55.68	-	-	74	-18.32	283	353	V
4	* 2.389	29.4	RMS	32.3	-18.3	43.4	54	-10.6	-	-	283	353	V
1	* 2.39	40.14	Pk	32.3	-18.3	54.14	-	-	74	-19.86	283	353	V
3	* 2.39	27.86	RMS	32.3	-18.3	41.86	54	-12.14	-	-	283	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

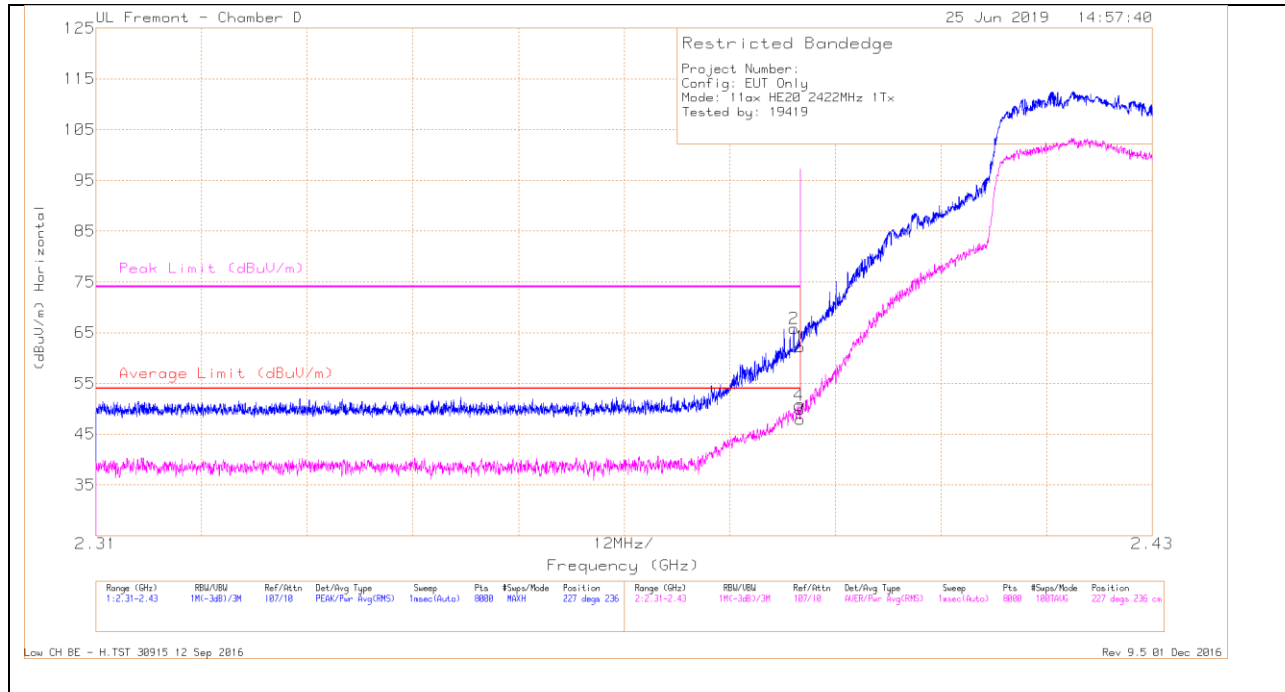

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.76	Pk	32	-20.6	62.16	-	-	74	-11.84	227	236	H
2	* 2.389	54.42	Pk	32	-20.6	65.82	-	-	74	-8.18	227	236	H
3	* 2.39	36.57	RMS	32	-20.6	47.97	54	-6.03	-	-	227	236	H
4	* 2.39	39.21	RMS	32	-20.6	50.61	54	-3.39	-	-	227	236	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

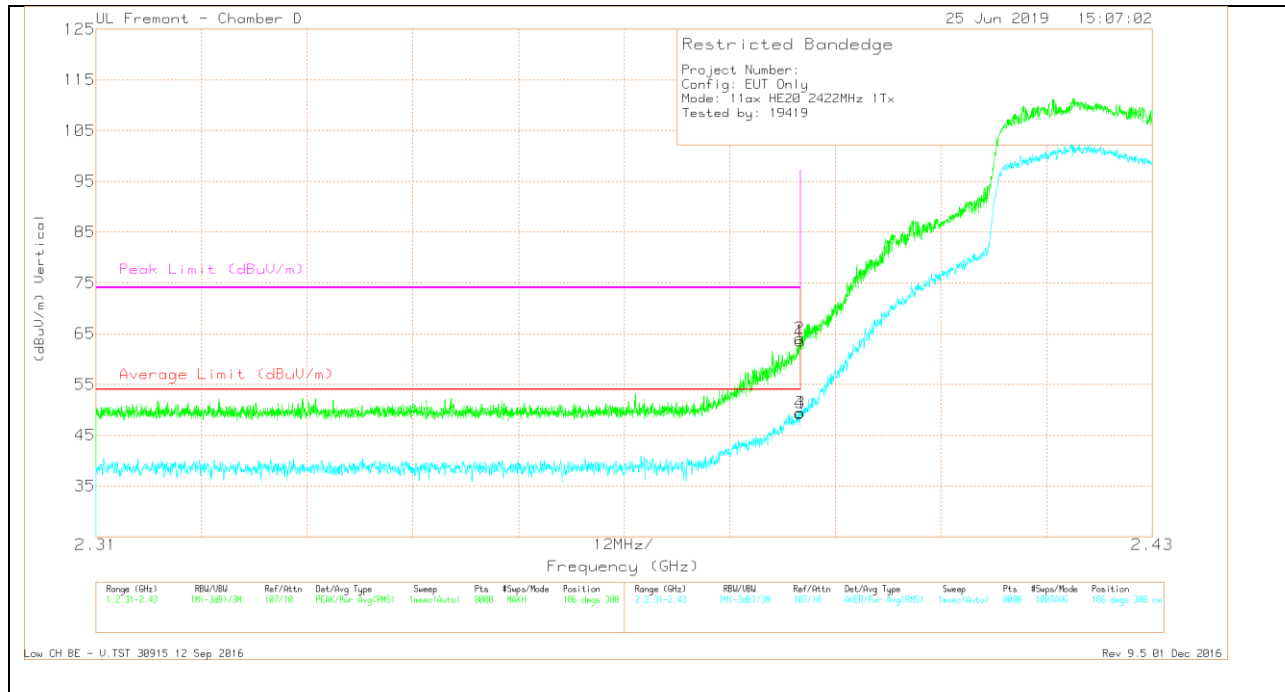

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.12	Pk	32	-20.6	63.52	-	-	74	-10.48	186	388	V
2	* 2.39	52.65	Pk	32	-20.6	64.05	-	-	74	-9.95	186	388	V
3	* 2.39	38.05	RMS	32	-20.6	49.45	54	-4.55	-	-	186	388	V
4	* 2.39	37.89	RMS	32	-20.6	49.29	54	-4.71	-	-	186	388	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

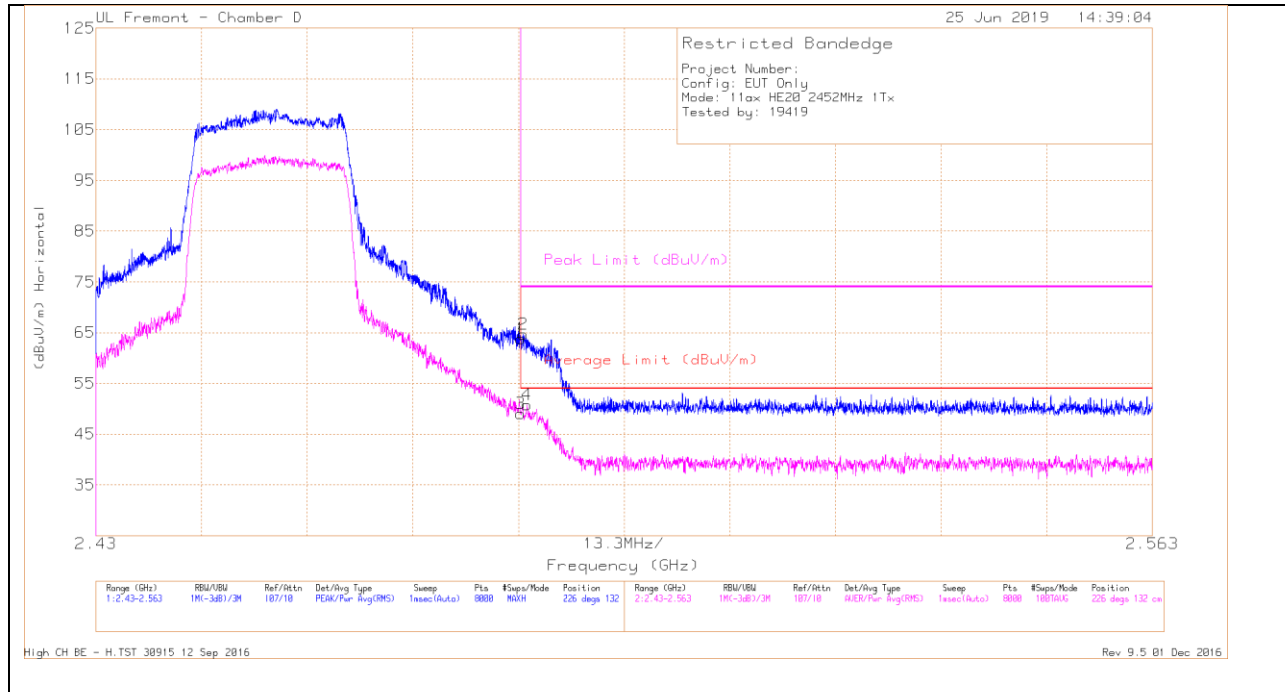


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.07	Pk	32.4	-20.6	63.87	-	-	74	-10.13	226	132	H
2	* 2.484	52.89	PK	32.4	-20.6	64.69	-	-	74	-9.31	226	132	H
3	* 2.484	37.2	RMS	32.4	-20.6	49	54	-5	-	-	226	132	H
4	* 2.484	39.08	RMS	32.3	-20.6	50.78	54	-3.22	-	-	226	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

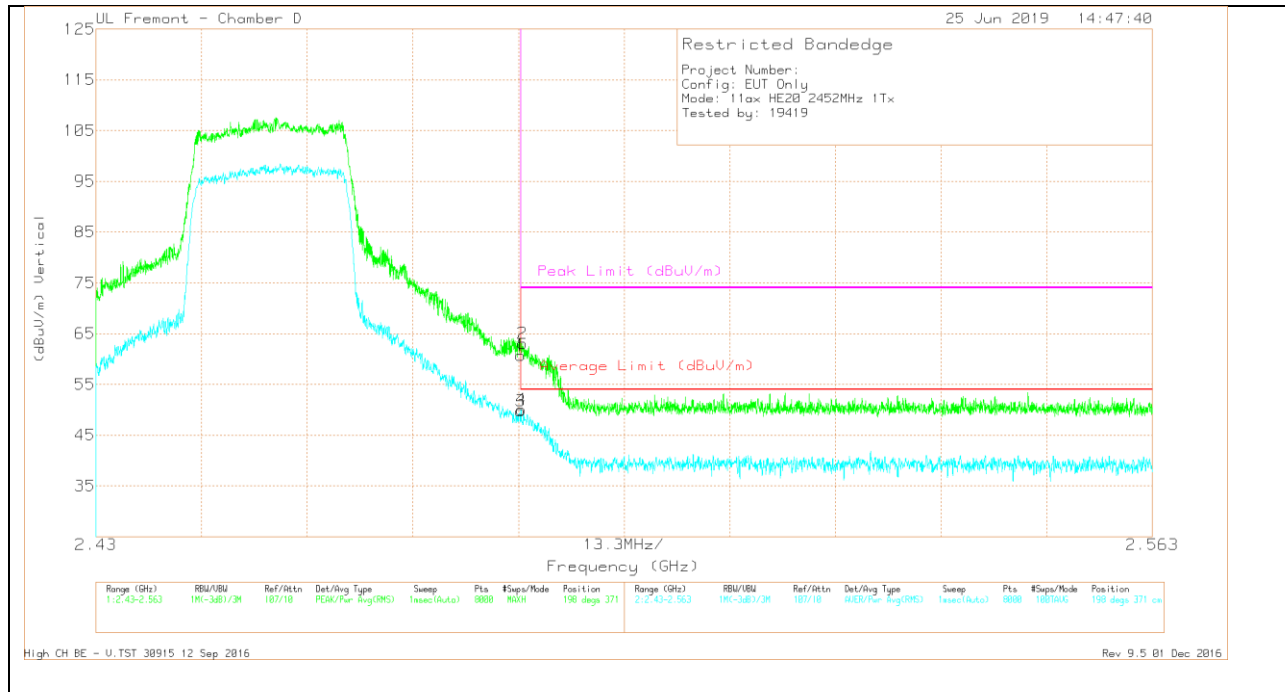

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.94	Pk	32.4	-20.6	60.74	-	-	74	-13.26	198	371	V
2	* 2.484	51.27	Pk	32.4	-20.6	63.07	-	-	74	-10.93	198	371	V
3	* 2.484	38.02	RMS	32.4	-20.6	49.82	54	-4.18	-	-	198	371	V
4	* 2.484	38.26	RMS	32.4	-20.6	50.06	54	-3.94	-	-	198	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

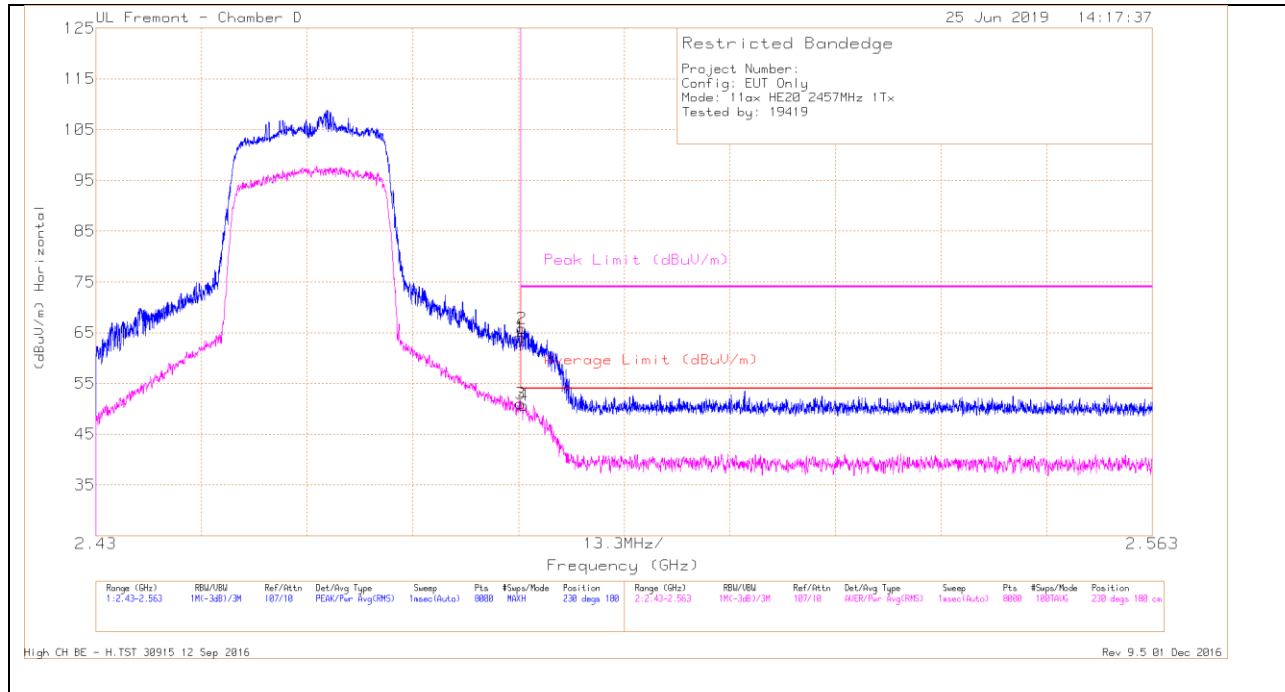

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.31	Pk	32.4	-20.6	64.11	-	-	74	-9.89	230	180	H
2	* 2.484	53.98	Pk	32.4	-20.6	65.78	-	-	74	-8.22	230	180	H
3	* 2.484	39.2	RMS	32.4	-20.6	51	54	-3	-	-	230	180	H
4	* 2.484	38.96	RMS	32.3	-20.6	50.66	54	-3.34	-	-	230	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

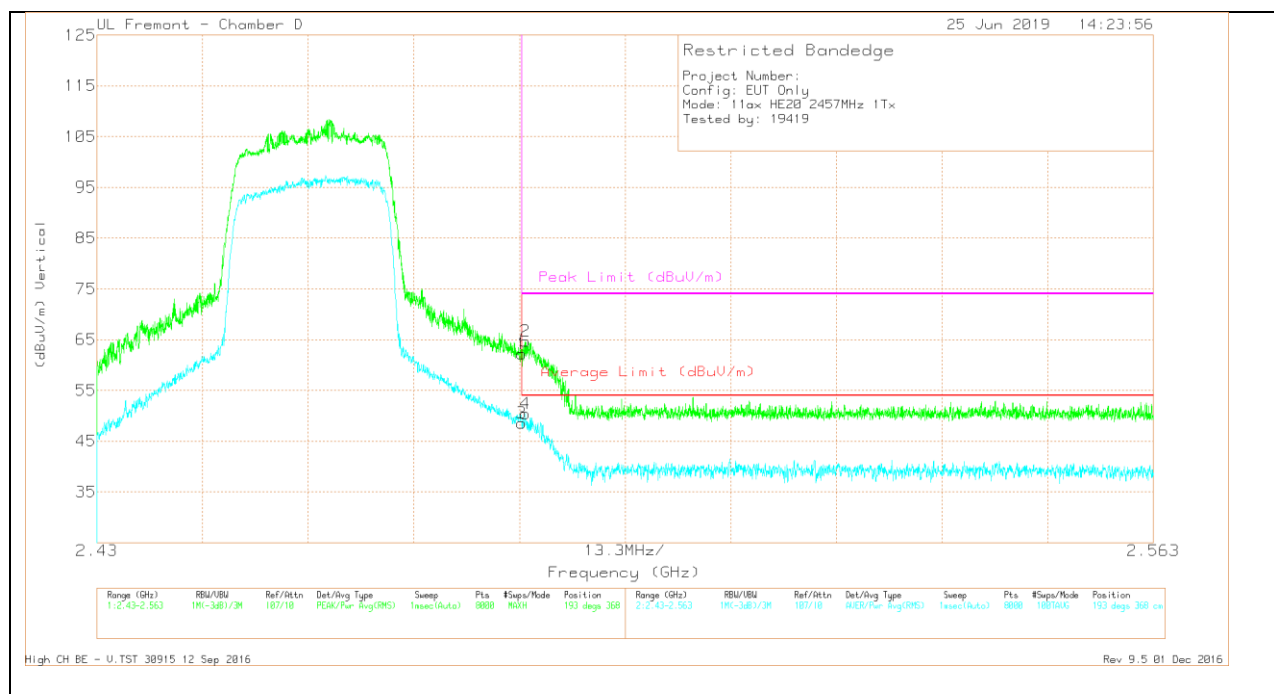

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.44	Pk	32.4	-20.6	62.24	-	-	74	-11.76	193	368	V
2	* 2.484	53.05	Pk	32.3	-20.6	64.75	-	-	74	-9.25	193	368	V
3	* 2.484	36.78	RMS	32.4	-20.6	48.58	54	-5.42	-	-	193	368	V
4	* 2.484	38.7	RMS	32.3	-20.6	50.4	54	-3.6	-	-	193	368	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

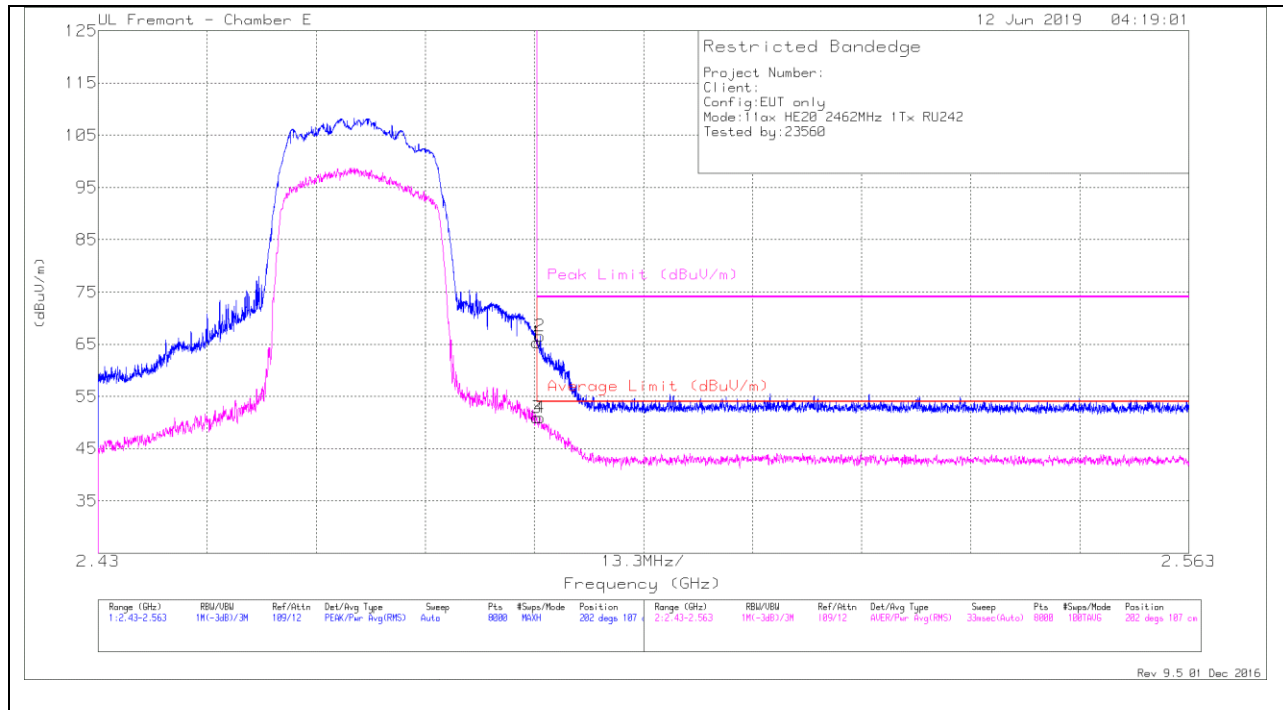


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.56	Pk	32.8	-18.1	65.26	-	-	74	-8.74	202	107	H
2	* 2.484	51.89	Pk	32.8	-18.1	66.59	-	-	74	-7.41	202	107	H
3	* 2.484	36.17	RMS	32.8	-18.1	50.87	54	-3.13	-	-	202	107	H
4	* 2.484	36.22	RMS	32.8	-18.1	50.92	54	-3.08	-	-	202	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

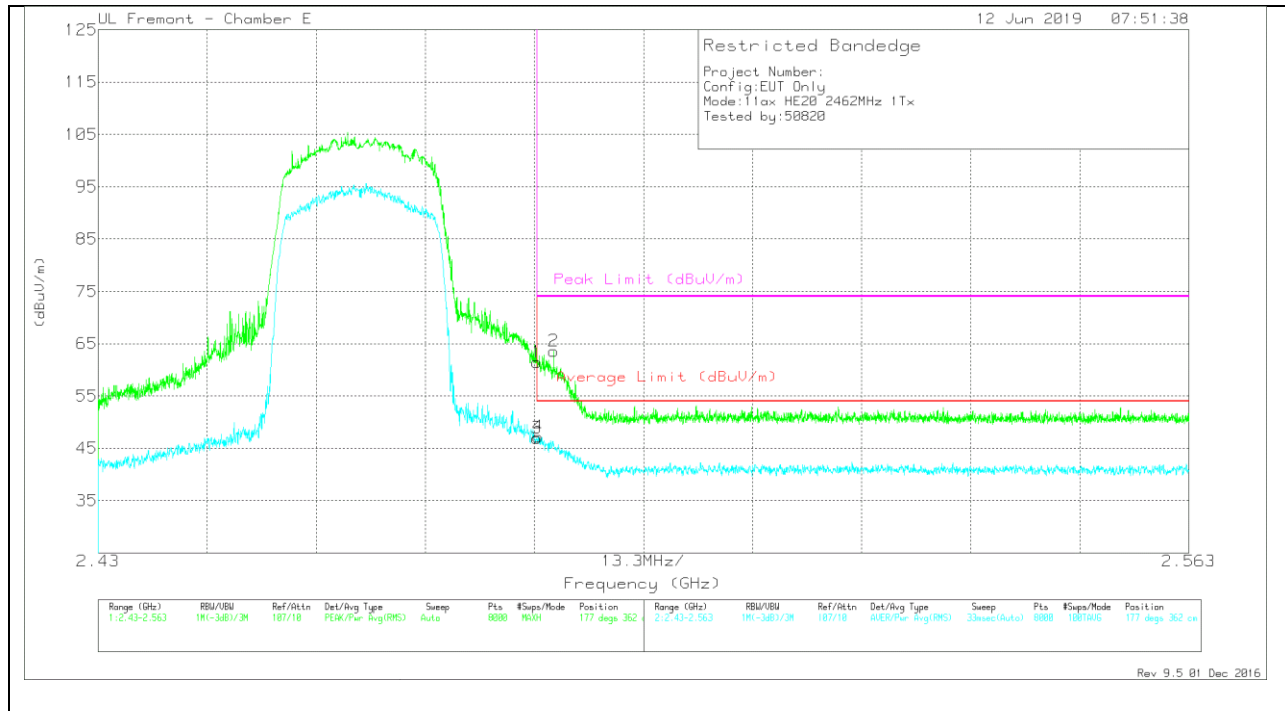

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.92	Pk	32.8	-26.3	61.42	-	-	74	-12.58	177	362	V
2	* 2.486	57.08	Pk	32.8	-26.3	63.58	-	-	74	-10.42	177	362	V
3	* 2.484	40.43	RMS	32.8	-26.3	46.93	54	-7.07	-	-	177	362	V
4	* 2.484	40.67	RMS	32.8	-26.3	47.17	54	-6.83	-	-	177	362	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

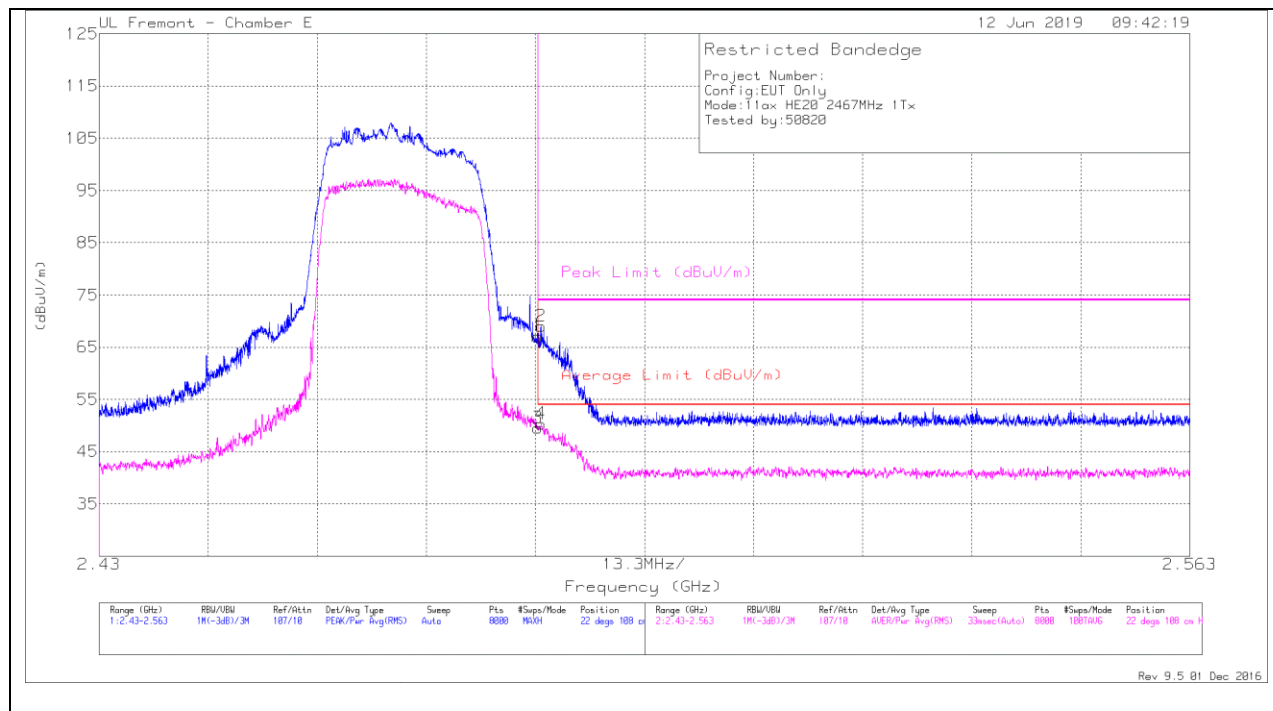


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	60.53	Pk	32.8	-26.3	67.03	-	-	74	-6.97	22	108	H
2	* 2.484	62.58	Pk	32.8	-26.3	69.08	-	-	74	-4.92	22	108	H
3	* 2.484	43	RMS	32.8	-26.3	49.5	54	-4.5	-	-	22	108	H
4	* 2.484	43.85	RMS	32.8	-26.3	50.35	54	-3.65	-	-	22	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

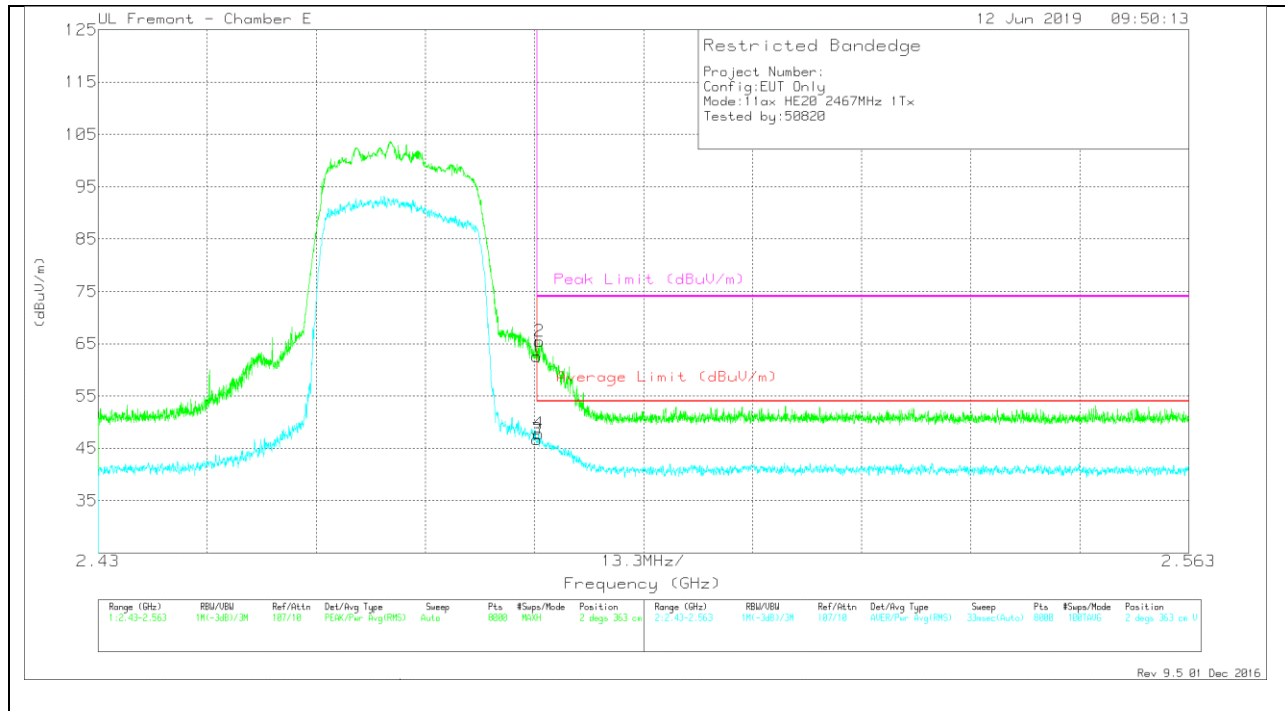

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.05	Pk	32.8	-26.3	62.55	-	-	74	-11.45	2	363	V
2	* 2.484	58.98	Pk	32.8	-26.3	65.48	-	-	74	-8.52	2	363	V
3	* 2.484	40.22	RMS	32.8	-26.3	46.72	54	-7.28	-	-	2	363	V
4	* 2.484	41.29	RMS	32.8	-26.3	47.79	54	-6.21	-	-	2	363	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

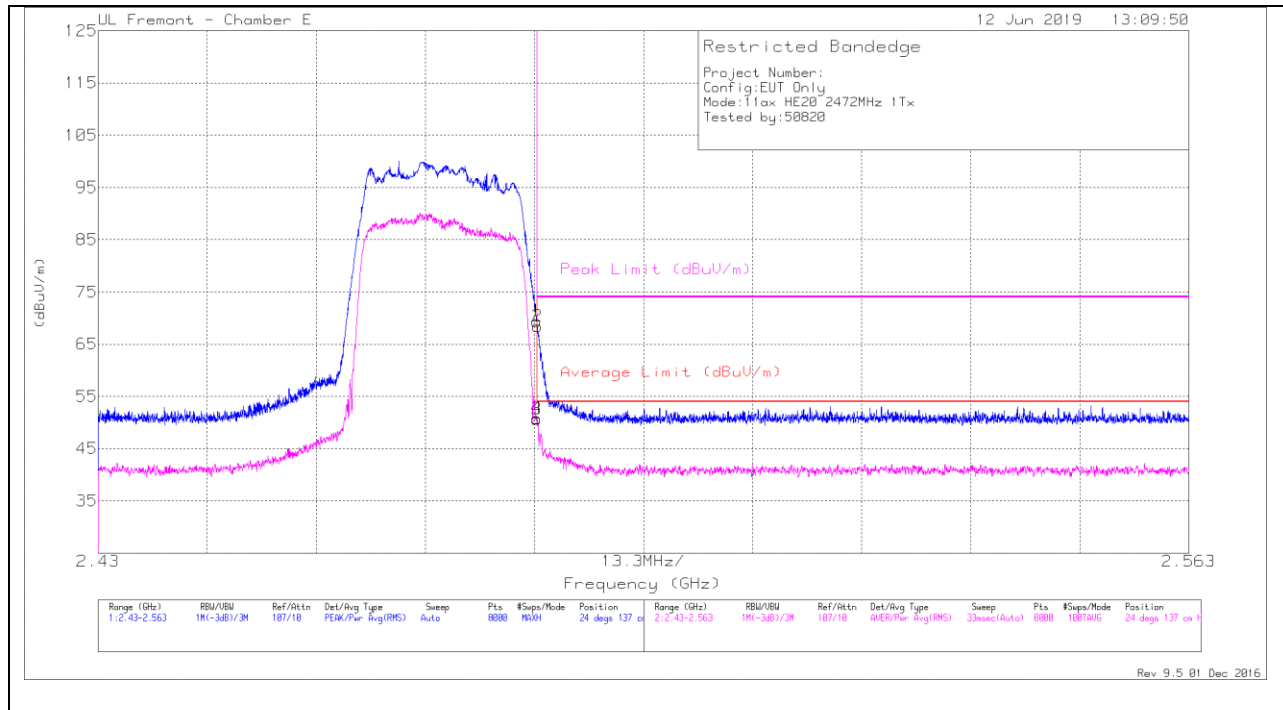


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	62.87	Pk	32.8	-26.3	69.37	-	-	74	-4.63	24	137	H
2	* 2.484	61.88	Pk	32.8	-26.3	68.38	-	-	74	-5.62	24	137	H
3	* 2.484	44.15	RMS	32.8	-26.3	50.65	54	-3.35	-	-	24	137	H
4	* 2.484	44.3	RMS	32.8	-26.3	50.8	54	-3.2	-	-	24	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

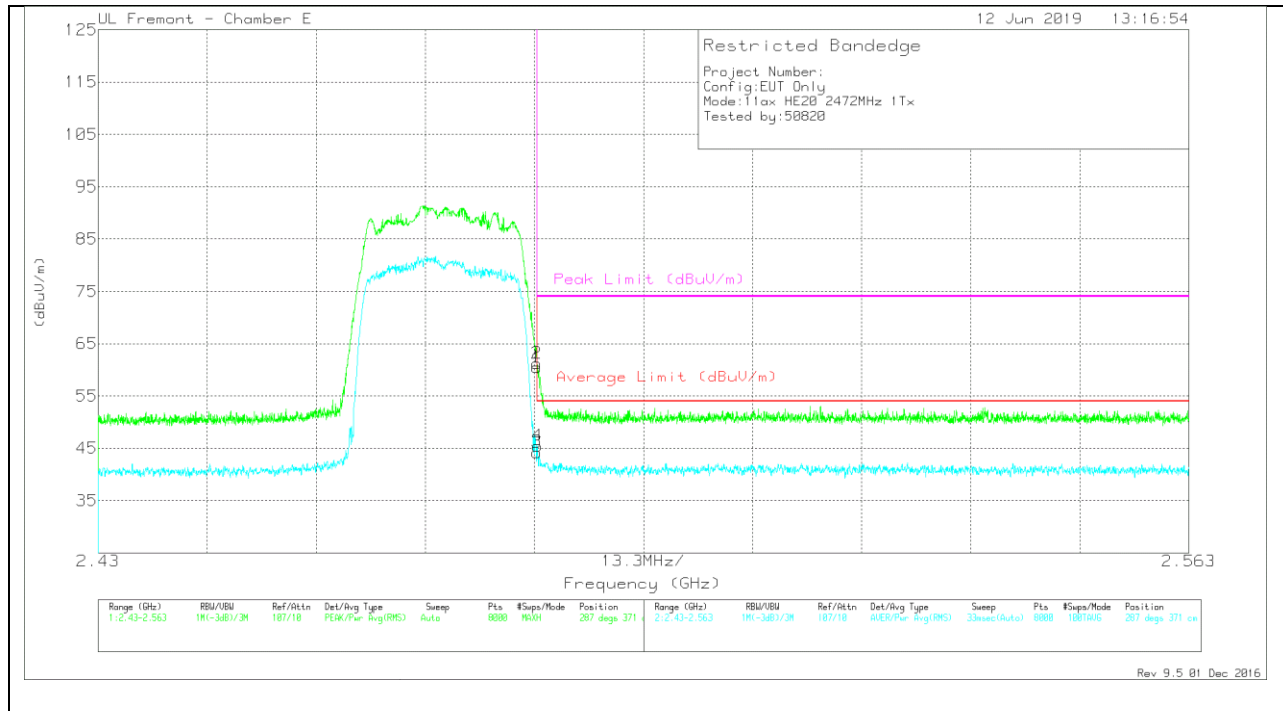

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.99	Pk	32.8	-26.3	60.49	-	-	74	-13.51	287	371	V
2	* 2.484	54.73	Pk	32.8	-26.3	61.23	-	-	74	-12.77	287	371	V
3	* 2.484	37.77	RMS	32.8	-26.3	44.27	54	-9.73	-	-	287	371	V
4	* 2.484	38.9	RMS	32.8	-26.3	45.4	54	-8.6	-	-	287	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 3 LEGACY SISO MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

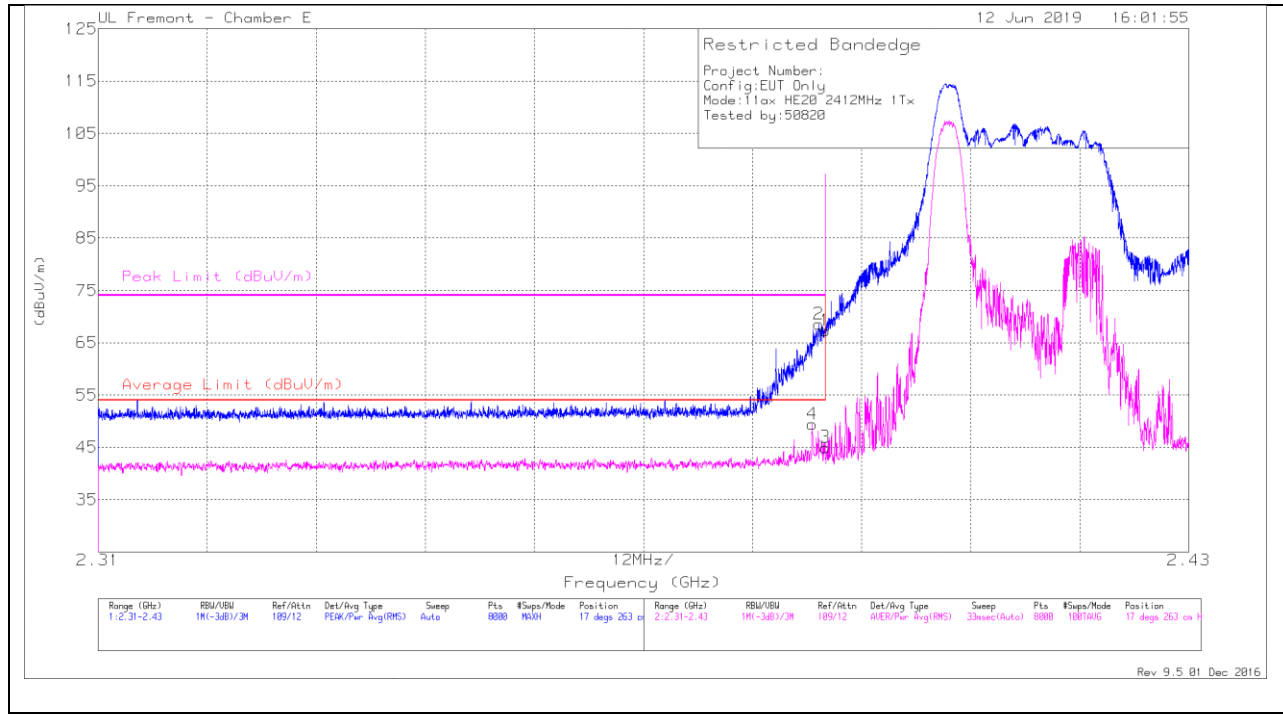

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	54.5	PK	32.3	-18.3	68.5	-	-	74	-5.5	17	263	H
4	* 2.389	35.38	RMS	32.3	-18.3	49.38	54	-4.62	-	-	17	263	H
1	* 2.39	53.33	PK	32.3	-18.3	67.33	-	-	74	-6.67	17	263	H
3	* 2.39	31.01	RMS	32.3	-18.3	45.01	54	-8.99	-	-	17	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

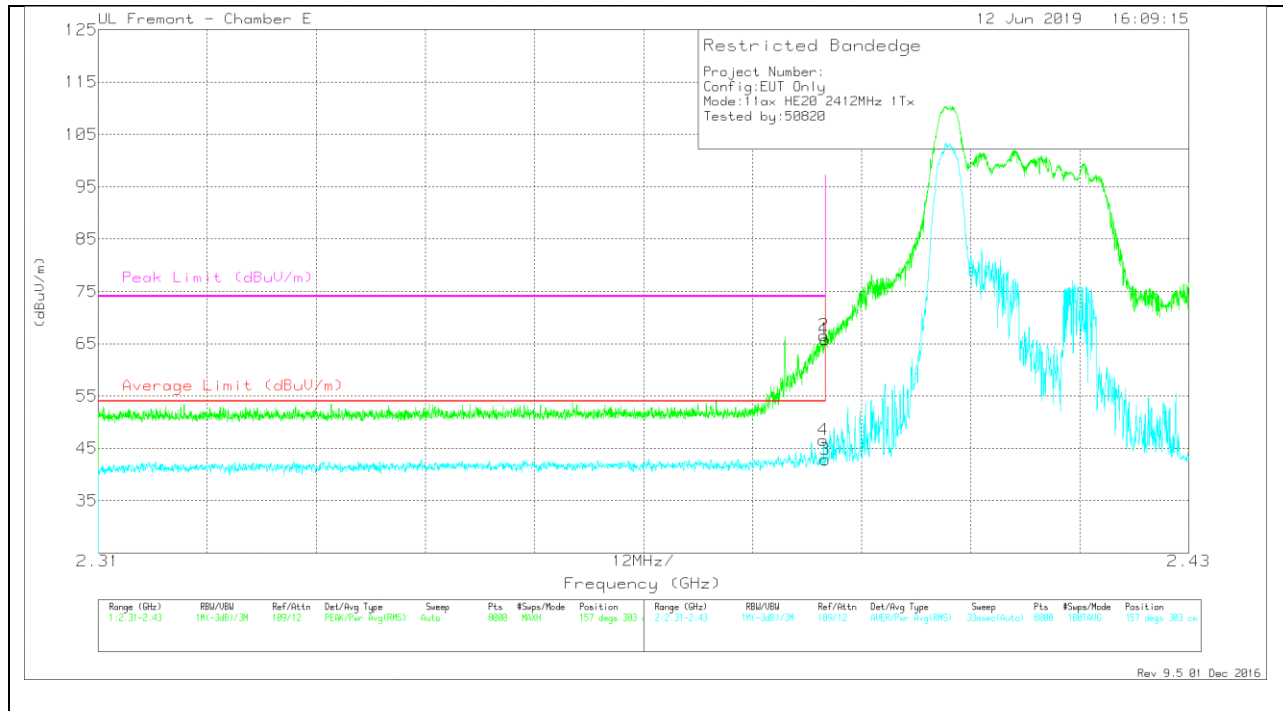

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.78	Pk	32.3	-18.3	65.78	-	-	74	-8.22	157	303	V
2	* 2.39	52.53	Pk	32.3	-18.3	66.53	-	-	74	-7.47	157	303	V
3	* 2.39	28.89	RMS	32.3	-18.3	42.89	54	-11.11	-	-	157	303	V
4	* 2.39	32.55	RMS	32.3	-18.3	46.55	54	-7.45	-	-	157	303	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

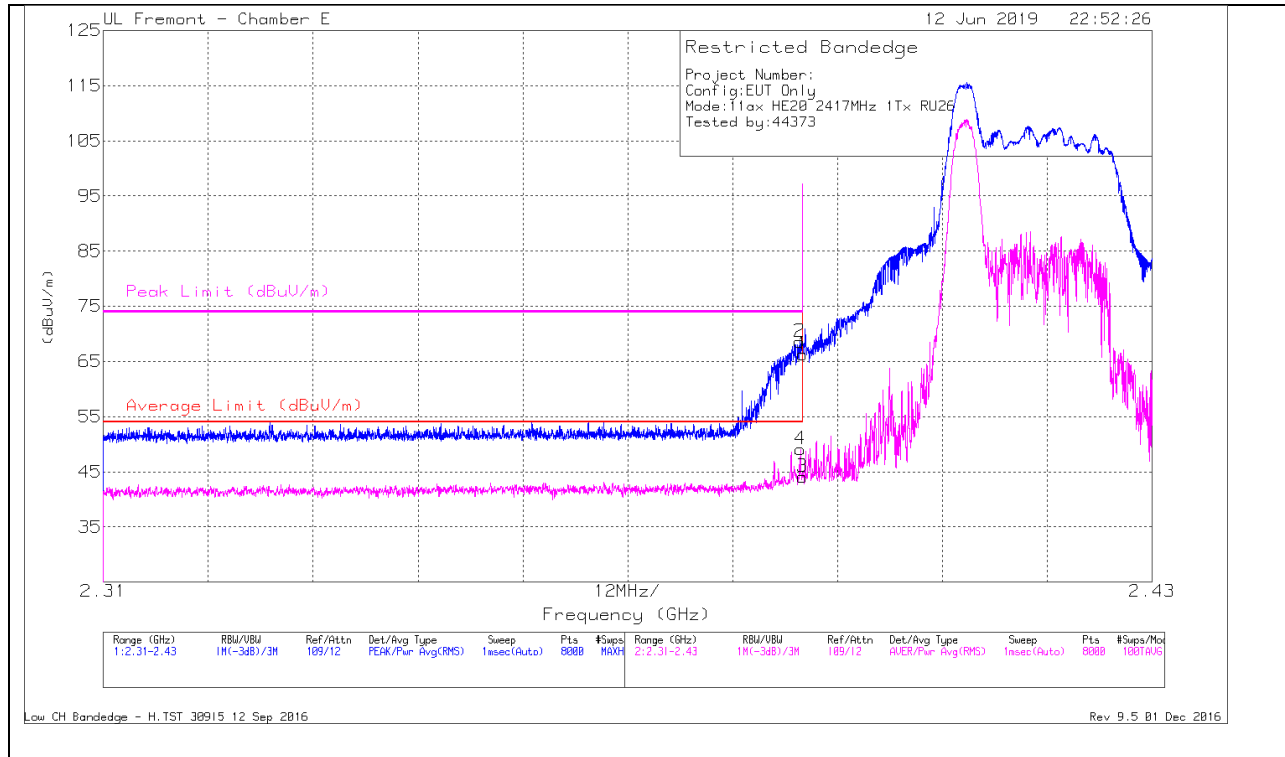


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.26	Pk	32.3	-18.3	66.26	-	-	74	-7.74	23	209	H
2	* 2.39	54.6	Pk	32.3	-18.3	68.6	-	-	74	-5.4	23	209	H
3	* 2.39	30.07	RMS	32.3	-18.3	44.07	54	-9.93	-	-	23	209	H
4	* 2.39	35.06	RMS	32.3	-18.3	49.06	54	-4.94	-	-	23	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

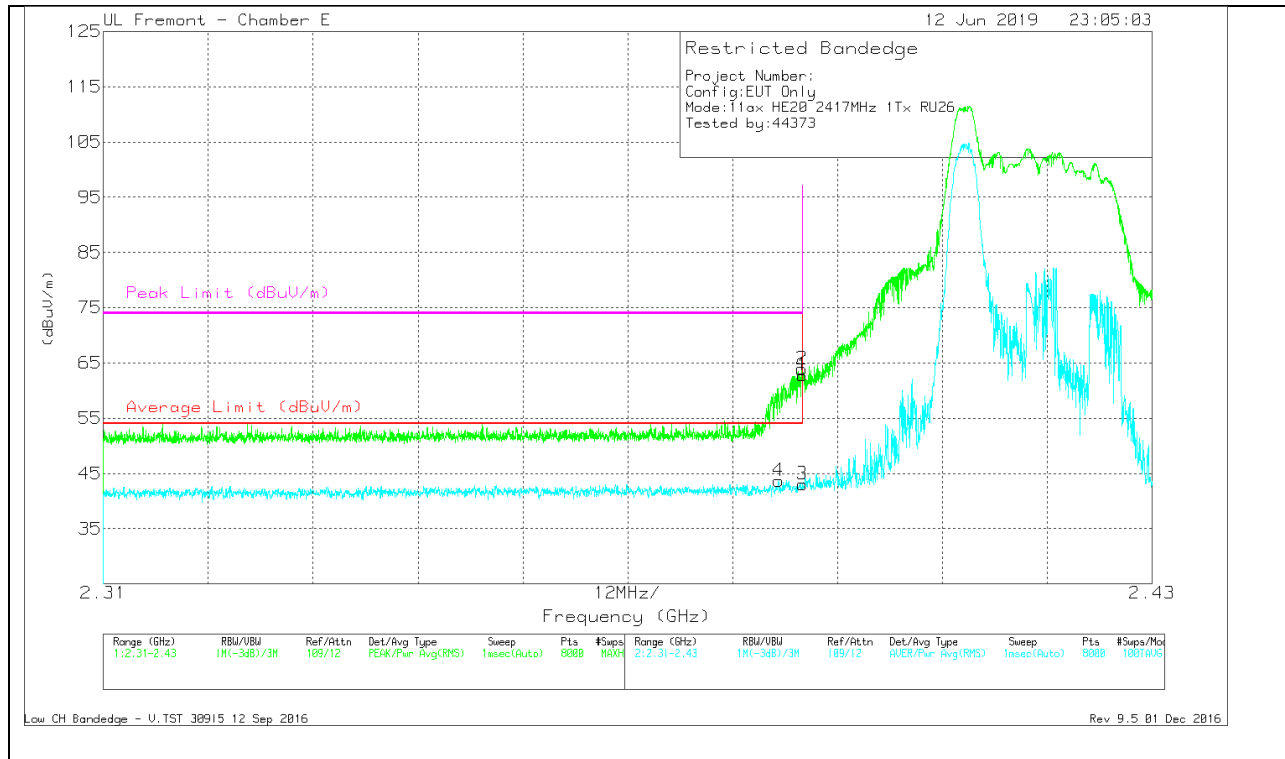

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.74	Pk	32.3	-18.3	62.74	-	-	74	-11.26	163	383	V
2	* 2.39	49.9	Pk	32.3	-18.3	63.9	-	-	74	-10.1	163	383	V
3	* 2.39	29.02	RMS	32.3	-18.3	43.02	54	-10.98	-	-	163	383	V
4	* 2.387	29.68	RMS	32.3	-18.3	43.68	54	-10.32	-	-	163	383	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

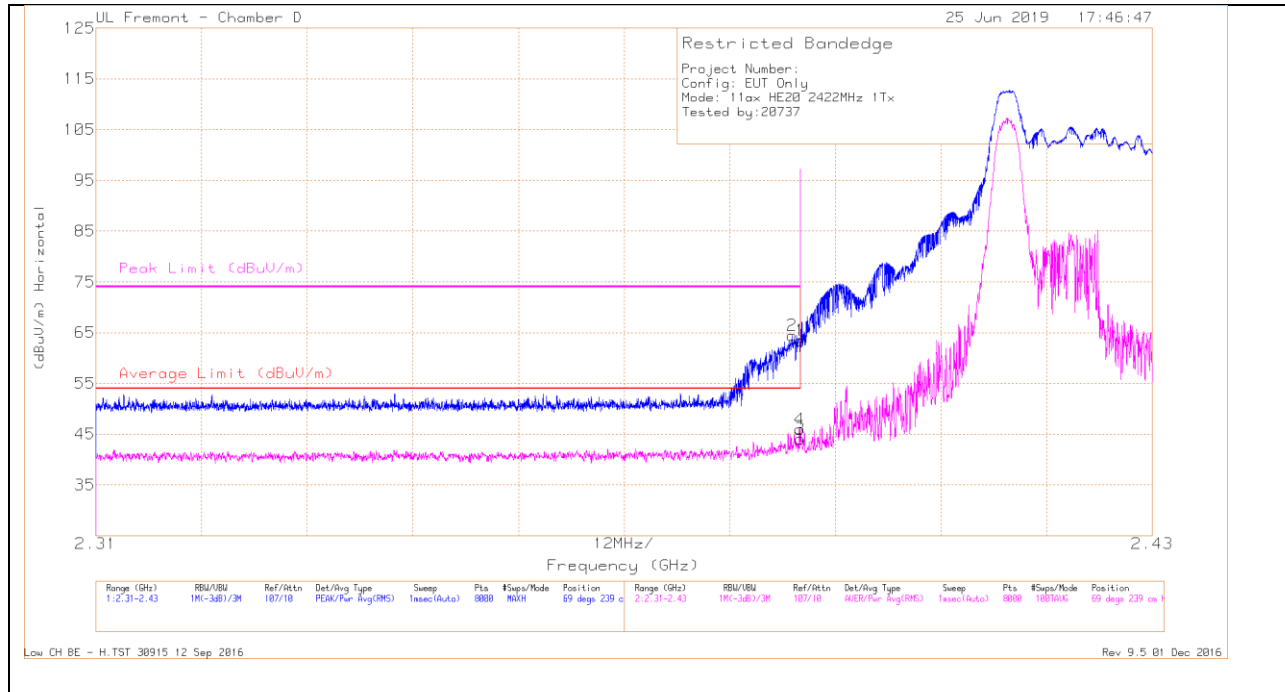


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.06	Pk	32	-20.6	63.46	-	-	74	-10.54	69	239	H
2	* 2.389	53.05	PK	32	-20.6	64.45	-	-	74	-9.55	69	239	H
3	* 2.39	32.74	RMS	32	-20.6	44.14	54	-9.86	-	-	69	239	H
4	* 2.39	34.58	RMS	32	-20.6	45.98	54	-8.02	-	-	69	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

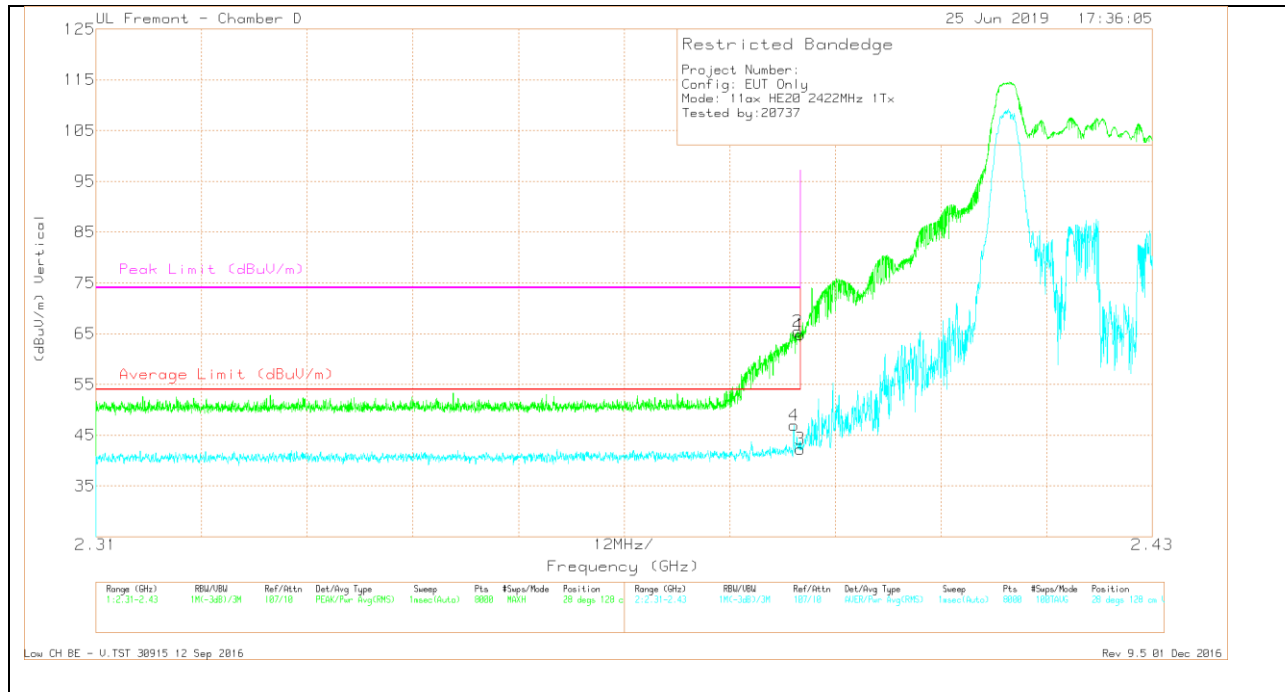

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/CbI/FiltriP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.37	Pk	32	-20.6	64.77	-	-	74	-9.23	28	128	V
2	* 2.39	54.05	Pk	32	-20.6	65.45	-	-	74	-8.55	28	128	V
3	* 2.39	30.88	RMS	32	-20.6	42.28	54	-11.72	-	-	28	128	V
4	* 2.389	35.55	RMS	32	-20.6	46.95	54	-7.05	-	-	28	128	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

Antenna 3 LEGACY SISO MODE: 26-Tones, RU Index 8
BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

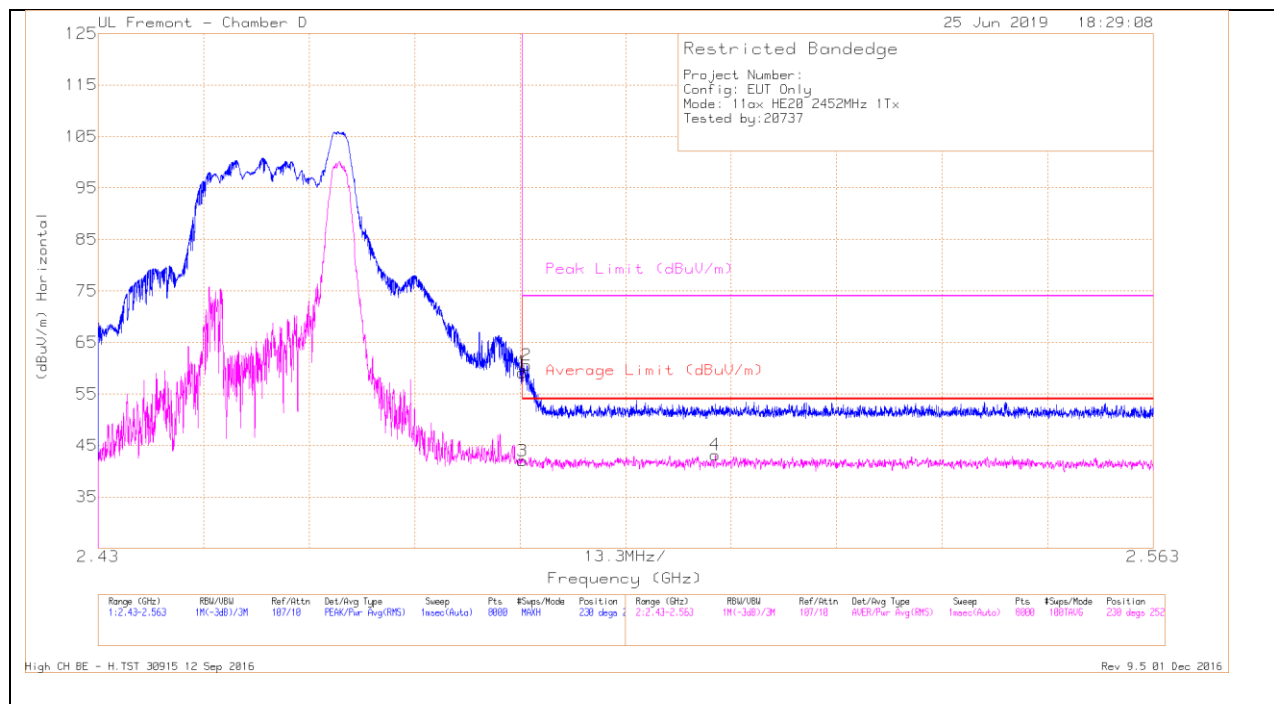


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.35	Pk	32.4	-20.6	59.15	-	-	74	-14.85	230	252	H
2	* 2.484	48.86	Pk	32.3	-20.6	60.56	-	-	74	-13.44	230	252	H
3	* 2.484	30.19	RMS	32.4	-20.6	41.99	54	-12.01	-	-	230	252	H
4	2.508	31.37	RMS	32.3	-20.5	43.17	54	-10.83	-	-	230	252	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

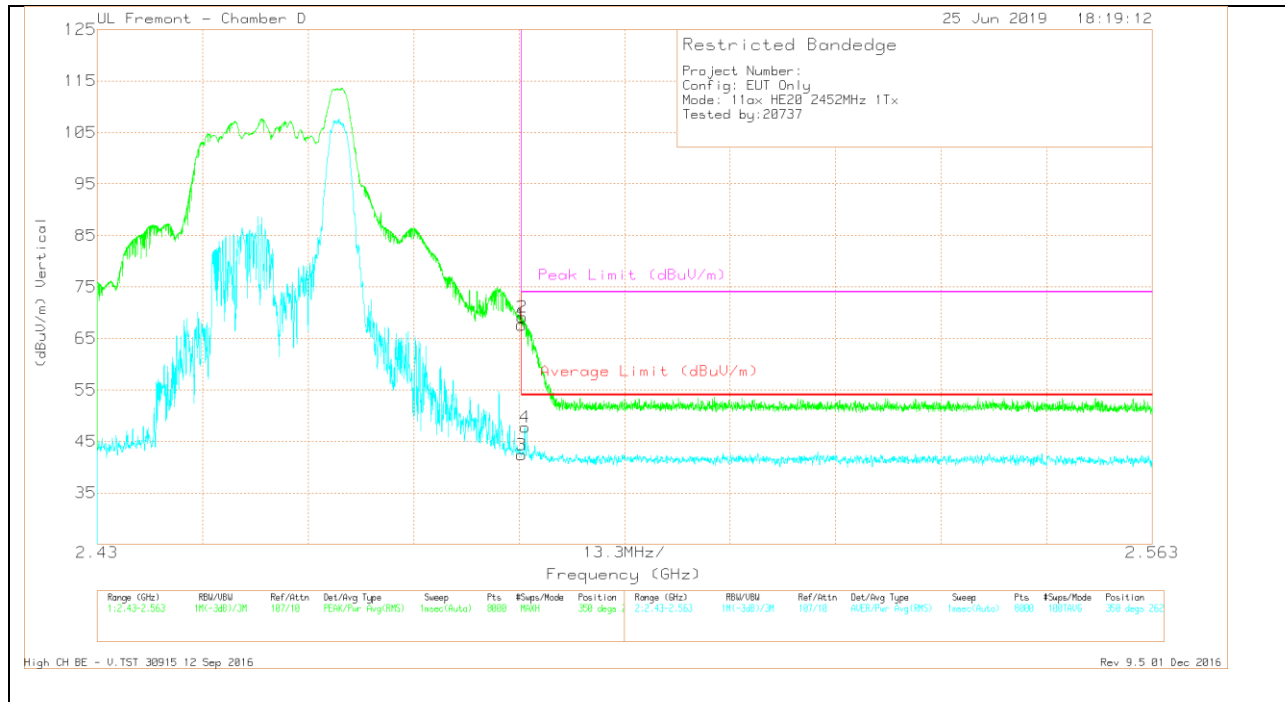

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/FiltriP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.83	Pk	32.4	-20.6	67.63	-	-	74	-6.37	350	262	V
2	* 2.484	57.34	Pk	32.4	-20.6	69.14	-	-	74	-4.86	350	262	V
3	* 2.484	30.57	RMS	32.4	-20.6	42.37	54	-11.63	-	-	350	262	V
4	* 2.484	36.06	RMS	32.3	-20.6	47.76	54	-6.24	-	-	350	262	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

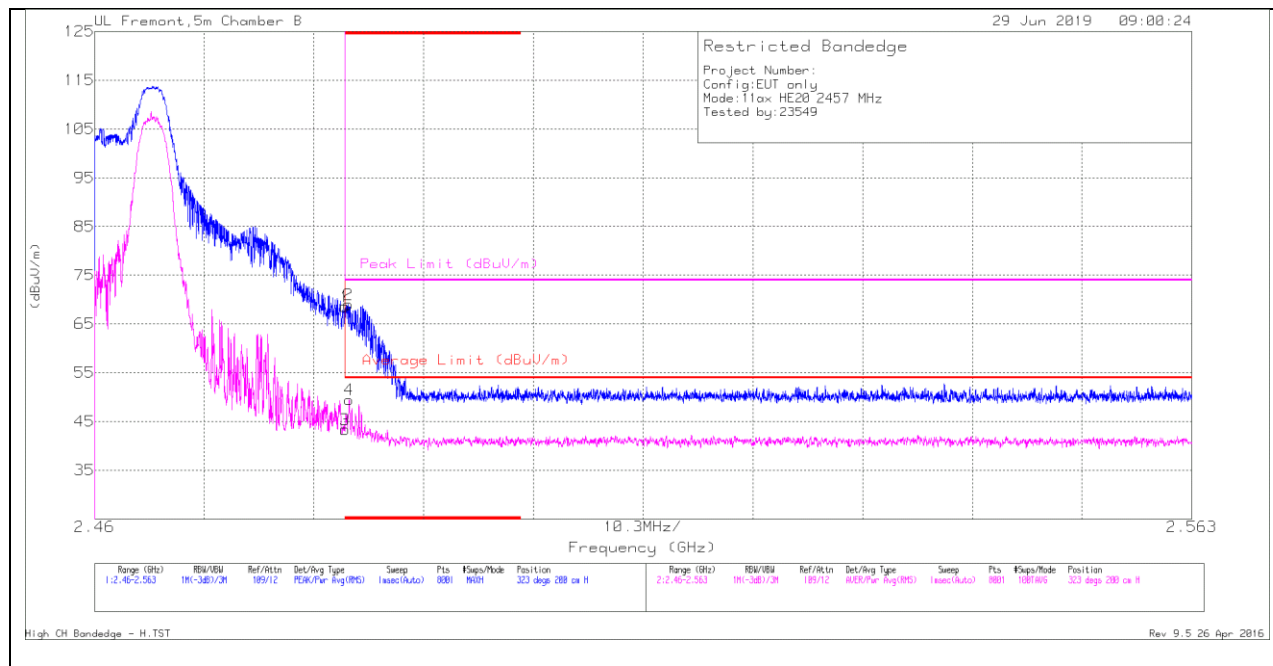


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.22	Pk	32.3	-18.9	68.62	-	-	74	-5.38	323	200	H
2	* 2.484	55.6	Pk	32.3	-18.9	69	-	-	74	-5	323	200	H
3	* 2.484	29.96	RMS	32.3	-18.9	43.36	54	-10.64	-	-	323	200	H
4	* 2.484	36.07	RMS	32.3	-18.9	49.47	54	-4.53	-	-	323	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

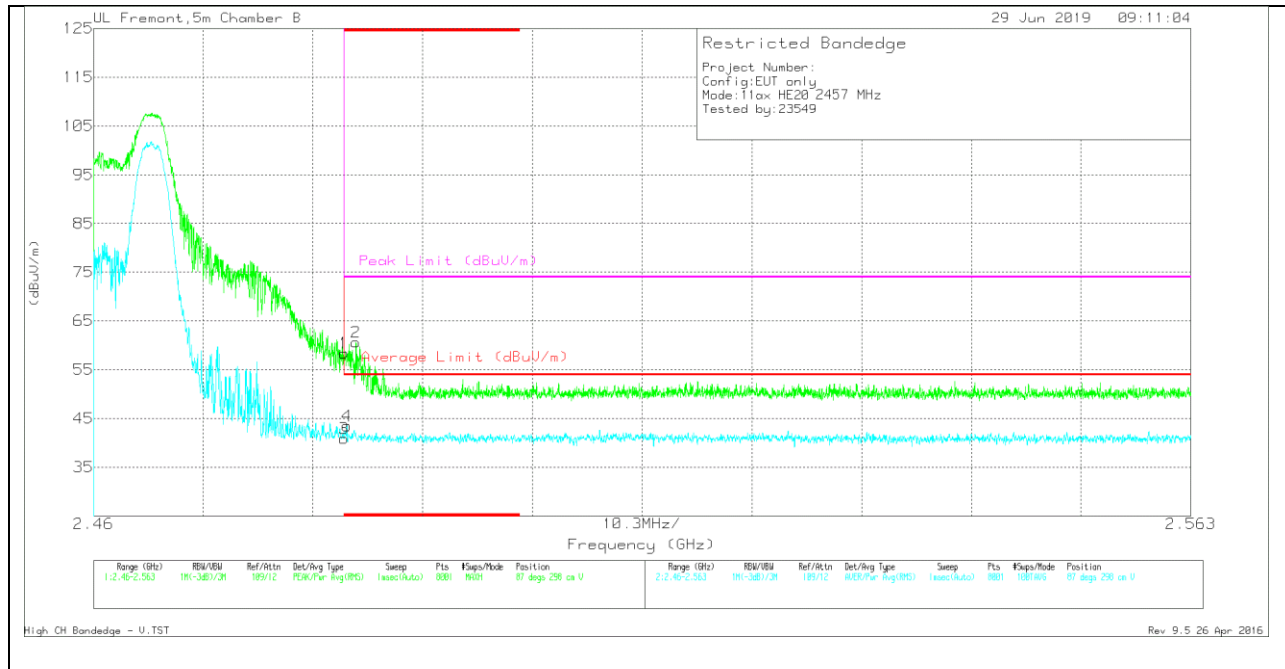

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.04	Pk	32.3	-18.9	58.44	-	-	74	-15.56	87	298	V
3	* 2.484	27.51	RMS	32.3	-18.9	40.91	54	-13.09	-	-	87	298	V
4	* 2.484	30.13	RMS	32.3	-18.9	43.53	54	-10.47	-	-	87	298	V
2	* 2.485	47.24	Pk	32.3	-18.9	60.64	-	-	74	-13.36	87	298	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

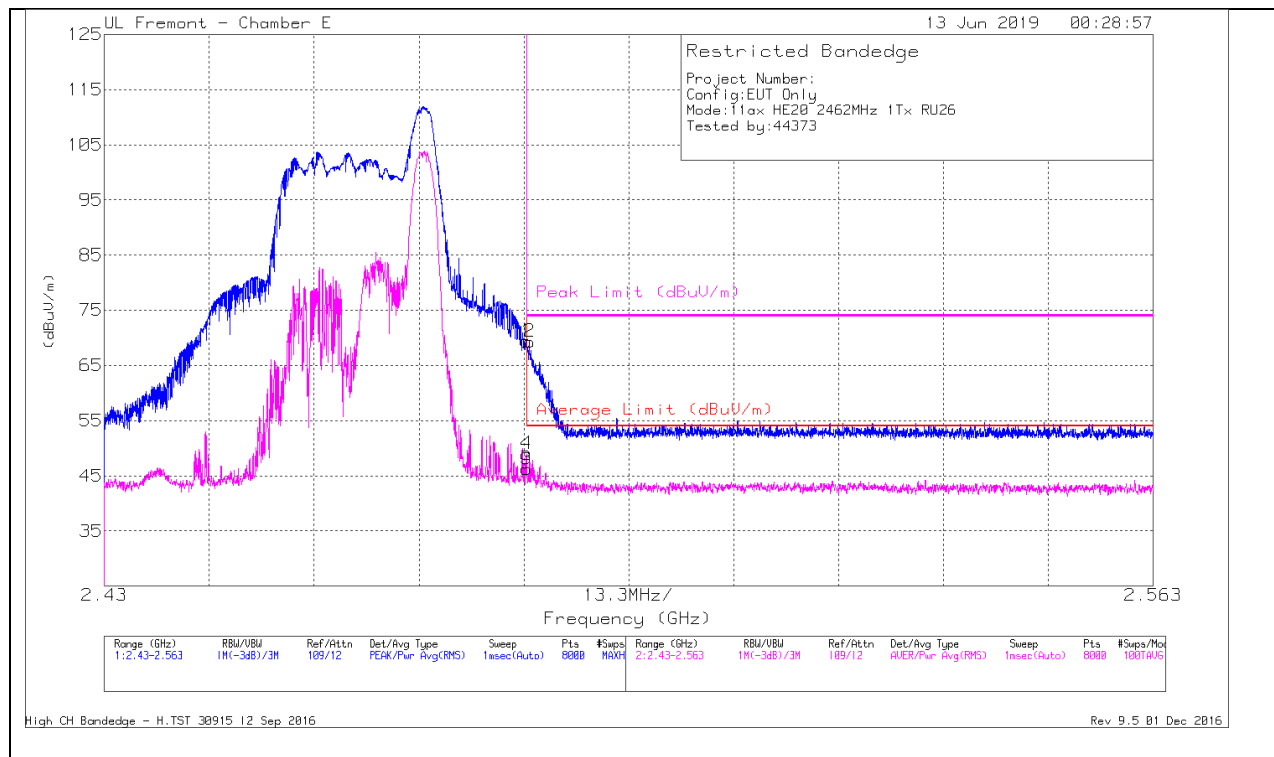


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Ampl/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.68	Pk	32.8	-18.1	69.38	-	-	74	-4.62	30	172	H
2	* 2.484	54.57	Pk	32.8	-18.1	69.27	-	-	74	-4.73	30	172	H
3	* 2.484	31.54	RMS	32.8	-18.1	46.24	54	-7.76	-	-	30	172	H
4	* 2.484	34.25	RMS	32.8	-18.1	48.95	54	-5.05	-	-	30	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

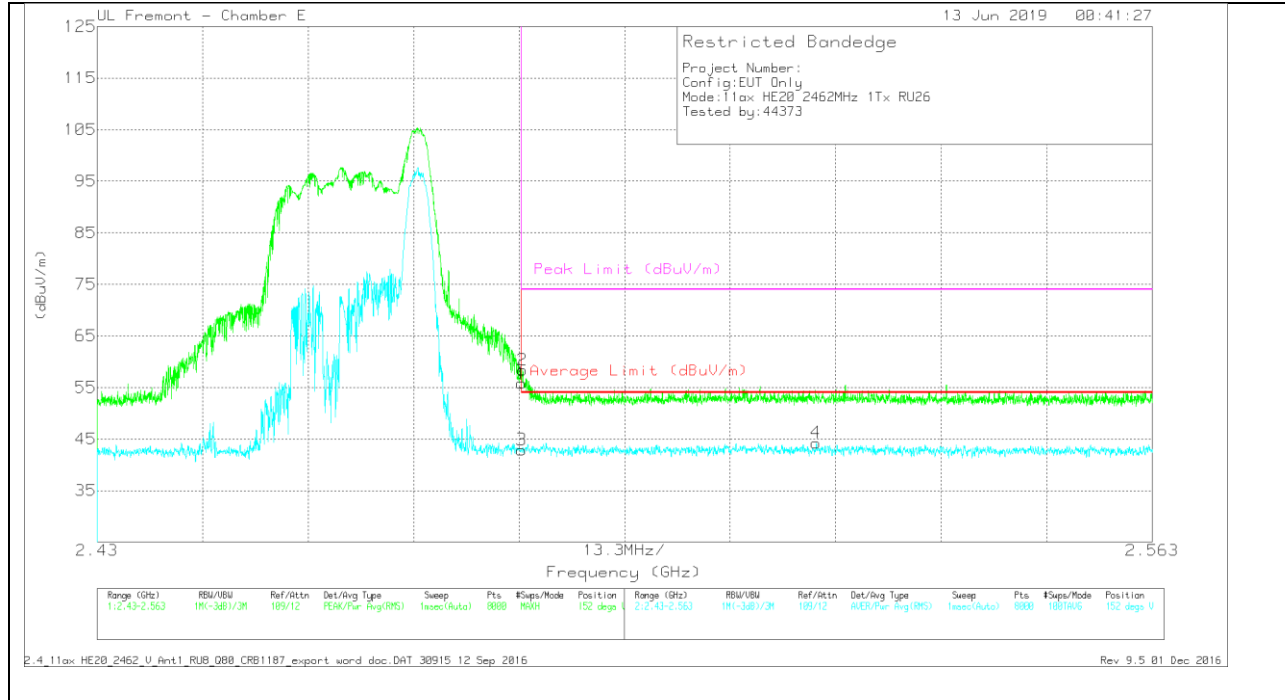

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.13	Pk	32.8	-18.1	55.83	-	-	74	-18.17	152	359	V
2	* 2.484	43.67	Pk	32.8	-18.1	58.37	-	-	74	-15.63	152	359	V
3	* 2.484	28.2	RMS	32.8	-18.1	42.9	54	-11.1	-	-	152	359	V
4	2.521	29.56	RMS	32.9	-18.2	44.26	54	-9.74	-	-	152	359	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

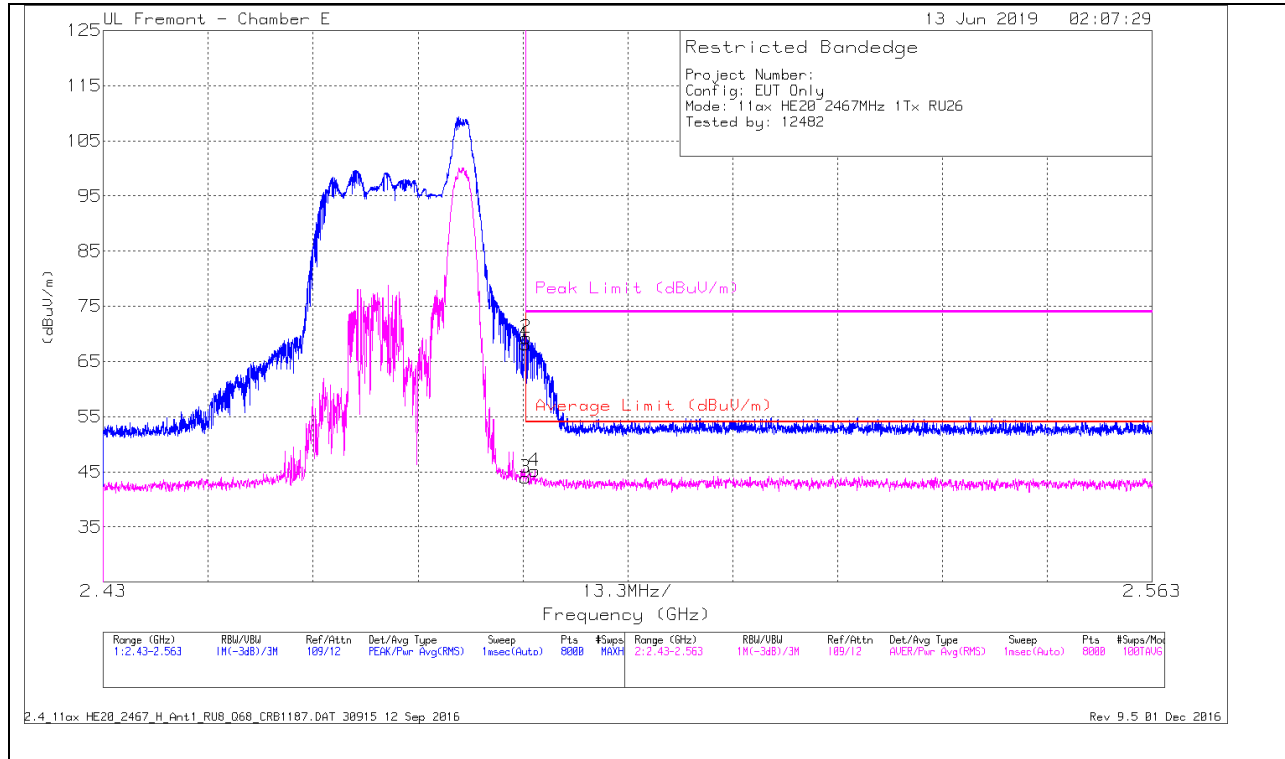


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.37	PK	32.8	-18.1	68.07	-	-	74	-5.93	57	322	H
2	* 2.484	54.62	PK	32.8	-18.1	69.32	-	-	74	-4.68	57	322	H
3	* 2.484	29.2	RMS	32.8	-18.1	43.9	54	-10.1	-	-	57	322	H
4	* 2.485	30.51	RMS	32.8	-18.1	45.21	54	-8.79	-	-	57	322	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

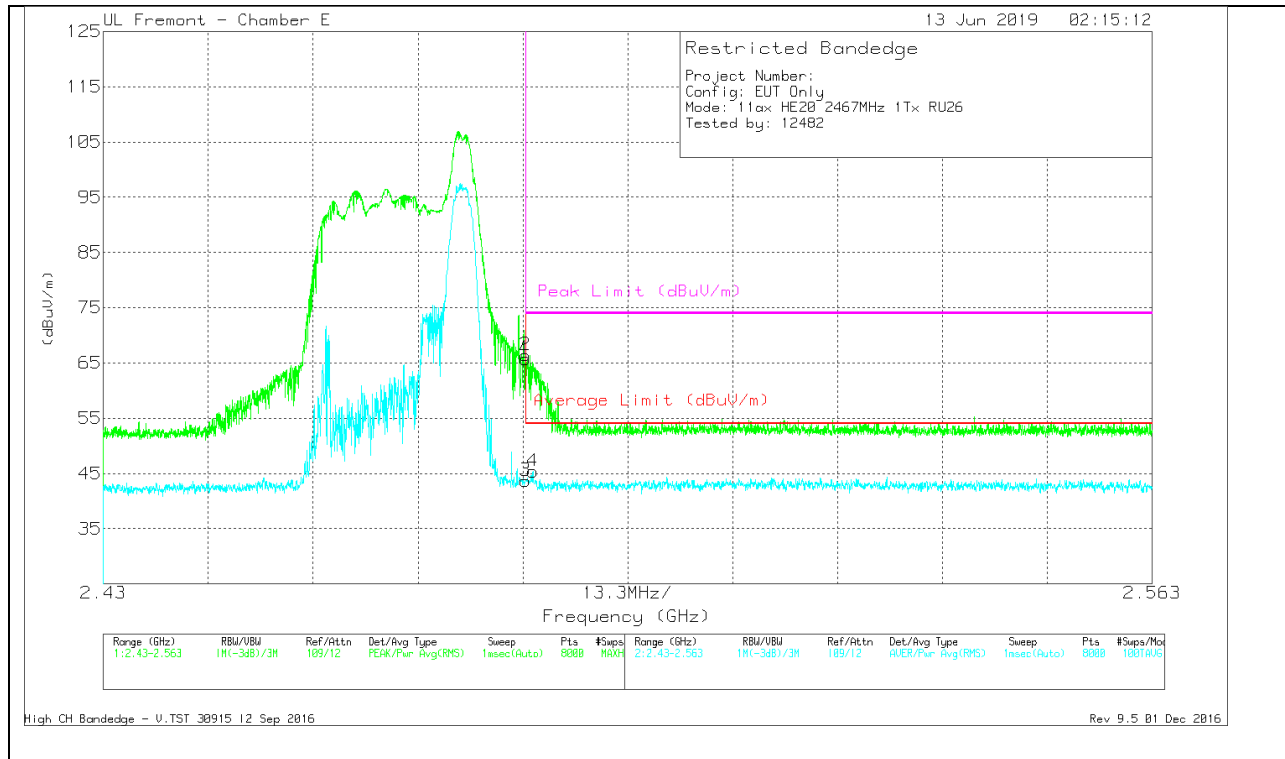

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.05	Pk	32.8	-18.1	65.75	-	-	74	-8.25	58	315	V
2	* 2.484	51.71	Pk	32.8	-18.1	66.41	-	-	74	-7.59	58	315	V
3	* 2.484	28.97	RMS	32.8	-18.1	43.67	54	-10.33	-	-	58	315	V
4	* 2.484	30.67	RMS	32.8	-18.1	45.37	54	-8.63	-	-	58	315	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

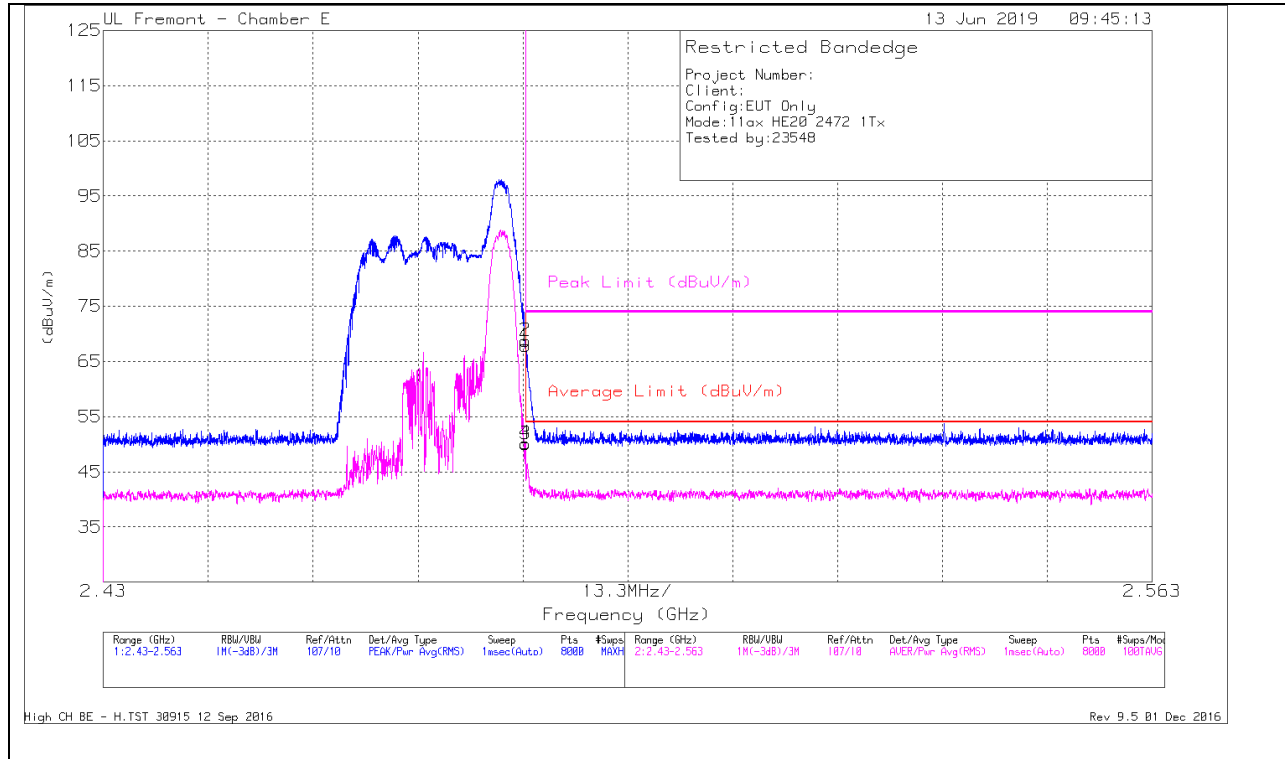


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	61.34	PK	32.8	-26.3	67.84	-	-	74	-6.16	197	222	H
2	* 2.484	62.25	PK	32.8	-26.3	68.75	-	-	74	-5.25	197	222	H
3	* 2.484	43.57	RMS	32.8	-26.3	50.07	54	-3.93	-	-	197	222	H
4	* 2.484	43.65	RMS	32.8	-26.3	50.15	54	-3.85	-	-	197	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

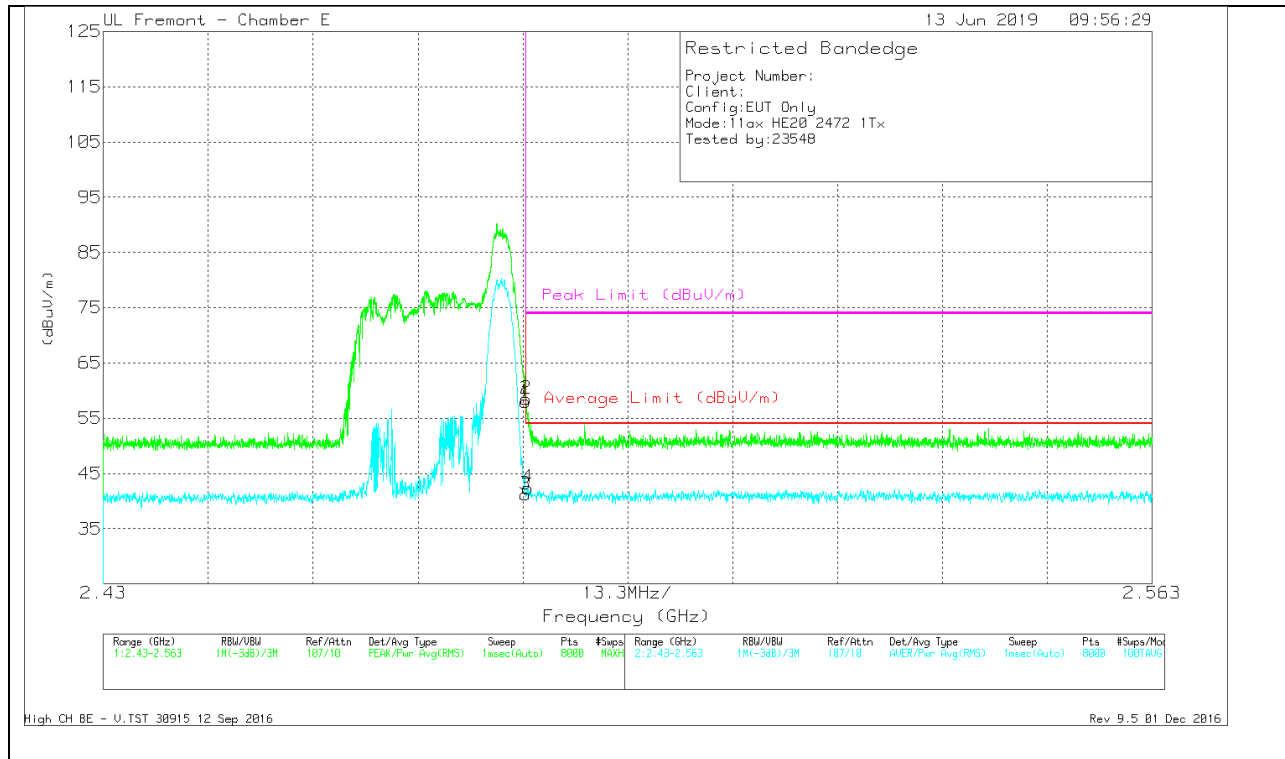

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.49	Pk	32.8	-26.3	57.99	-	-	74	-16.01	252	393	V
2	* 2.484	52.01	Pk	32.8	-26.3	58.51	-	-	74	-15.49	252	393	V
3	* 2.484	34.67	RMS	32.8	-26.3	41.17	54	-12.83	-	-	252	393	V
4	* 2.484	35.85	RMS	32.8	-26.3	42.35	54	-11.65	-	-	252	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 3 LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

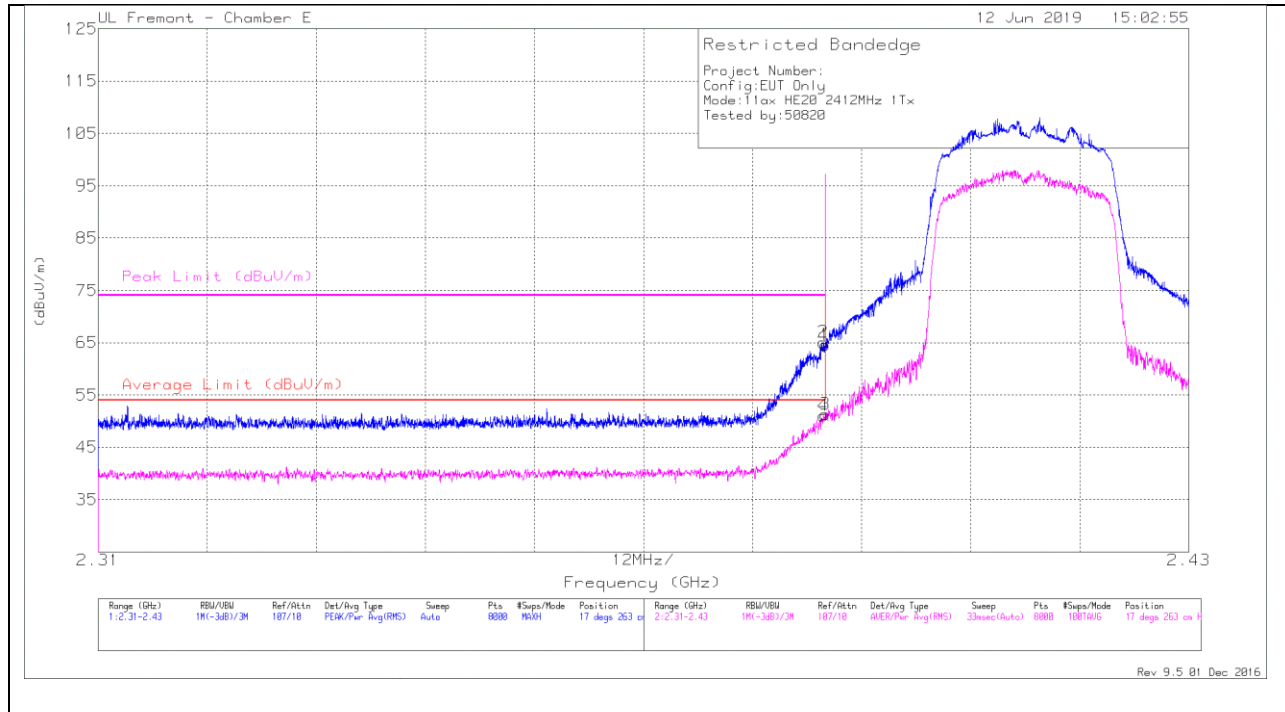


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	58.47	Pk	32.3	-26.2	64.57	-	-	74	-9.43	17	263	H
2	* 2.39	59	Pk	32.3	-26.2	65.1	-	-	74	-8.9	17	263	H
3	* 2.39	45.13	RMS	32.3	-26.2	51.23	54	-2.77	-	-	17	263	H
4	* 2.39	44.99	RMS	32.3	-26.2	51.09	54	-2.91	-	-	17	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

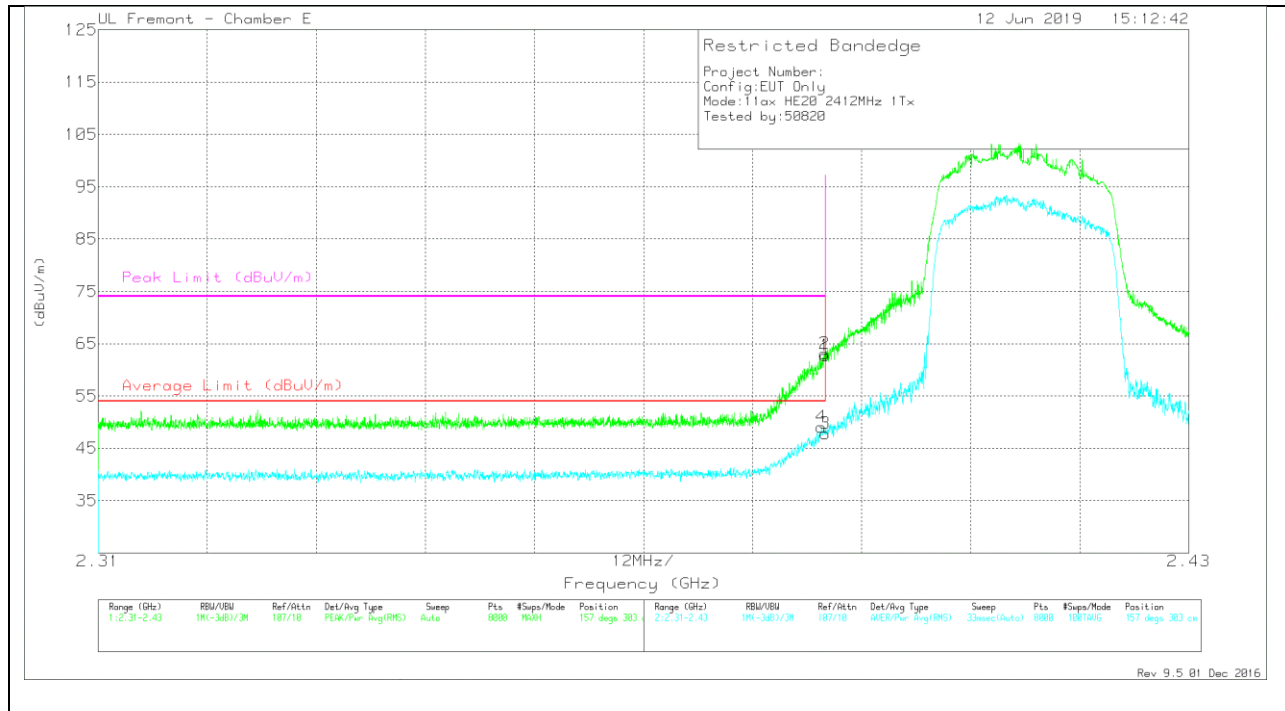

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	56.57	Pk	32.3	-26.2	62.67	-	-	74	-11.33	157	303	V
2	* 2.39	56.98	Pk	32.3	-26.2	63.08	-	-	74	-10.92	157	303	V
3	* 2.39	41.72	RMS	32.3	-26.2	47.82	54	-6.18	-	-	157	303	V
4	* 2.39	42.92	RMS	32.3	-26.2	49.02	54	-4.98	-	-	157	303	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

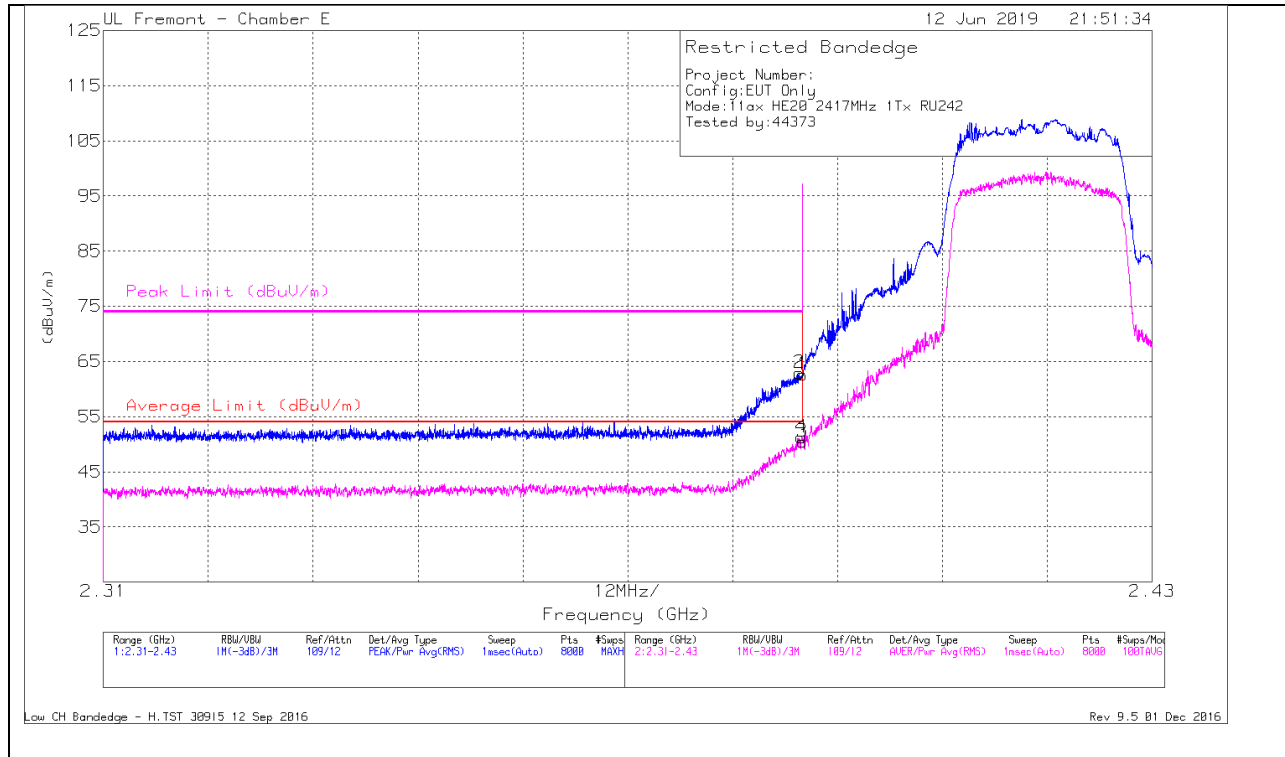


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.59	Pk	32.3	-18.3	62.59	-	-	74	-11.41	23	209	H
2	* 2.39	48.88	Pk	32.3	-18.3	62.88	-	-	74	-11.12	23	209	H
3	* 2.39	36.48	RMS	32.3	-18.3	50.48	54	-3.52	-	-	23	209	H
4	* 2.39	37.25	RMS	32.3	-18.3	51.25	54	-2.75	-	-	23	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

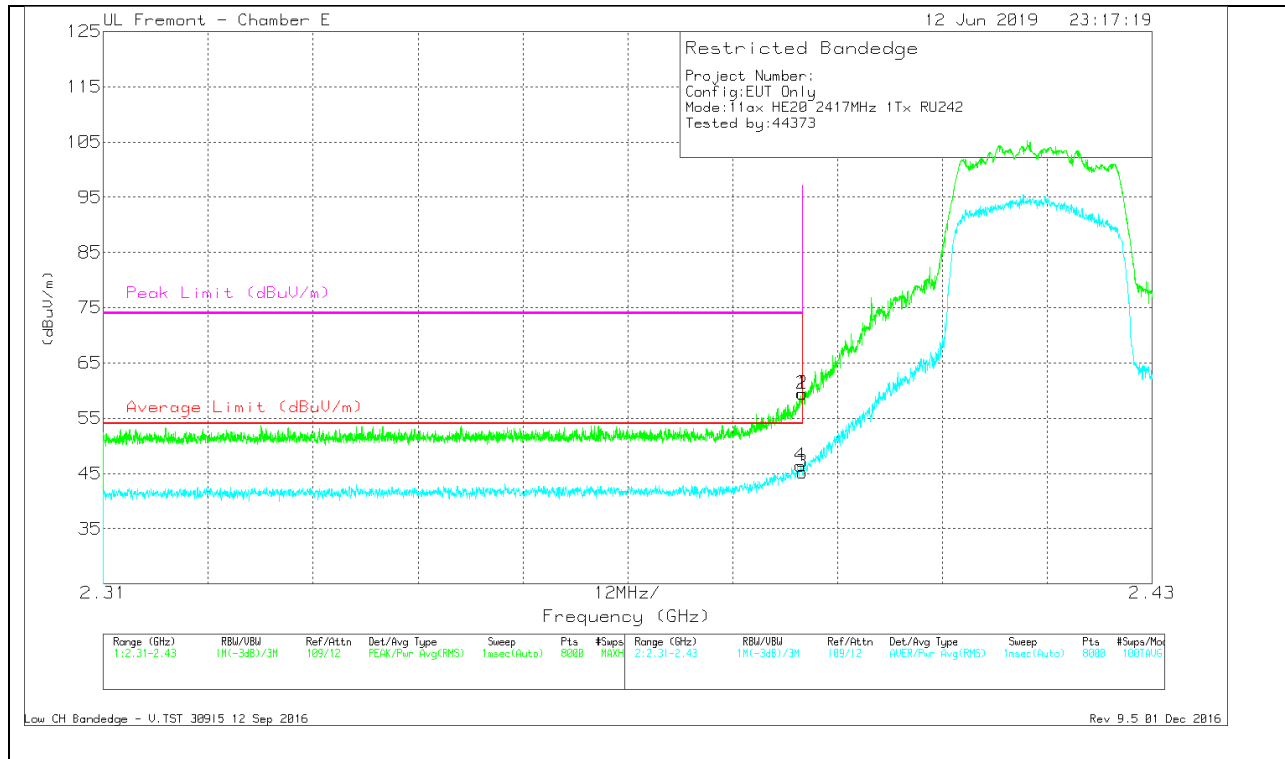

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.47	Pk	32.3	-18.3	59.47	-	-	74	-14.53	162	383	V
2	* 2.39	45.45	Pk	32.3	-18.3	59.45	-	-	74	-14.55	162	383	V
3	* 2.39	31.22	RMS	32.3	-18.3	45.22	54	-8.78	-	-	162	383	V
4	* 2.39	32.41	RMS	32.3	-18.3	46.41	54	-7.59	-	-	162	383	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

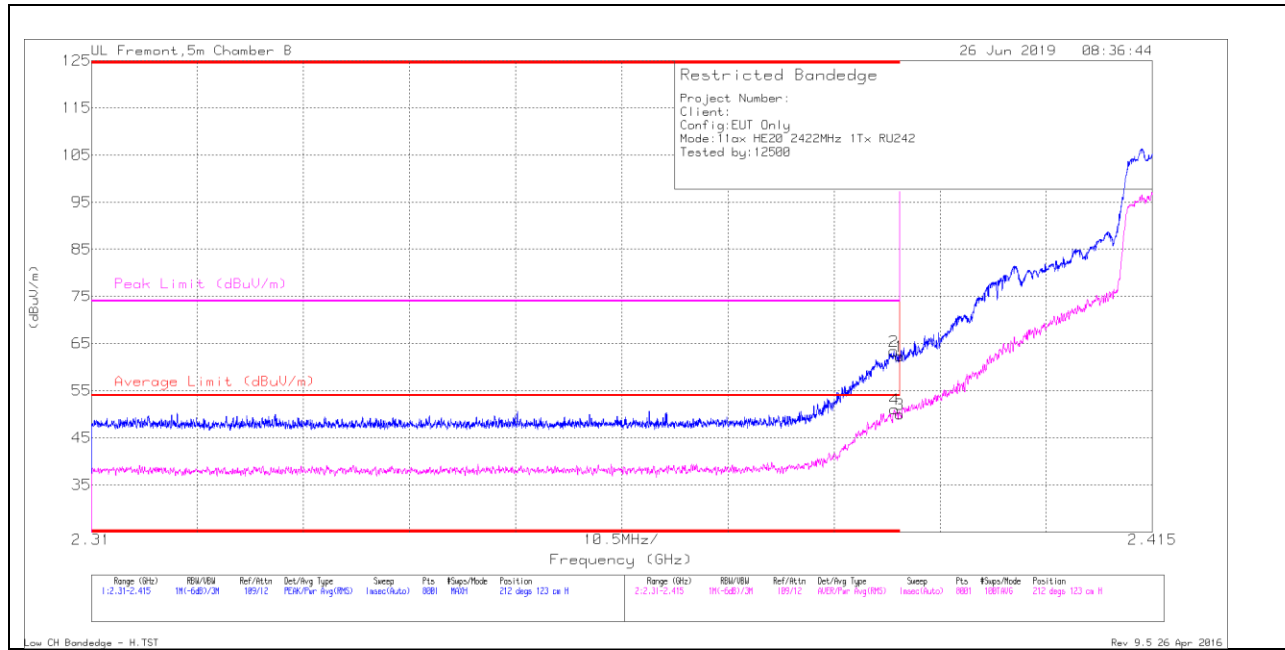


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.36	Pk	31.9	-18.9	62.36	-	-	74	-11.64	212	123	H
2	* 2.389	50.43	Pk	31.9	-18.9	63.43	-	-	74	-10.57	212	123	H
3	* 2.39	37.01	RMS	31.9	-18.9	50.01	54	-3.99	-	-	212	123	H
4	* 2.389	38.06	RMS	31.9	-18.9	51.06	54	-2.94	-	-	212	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

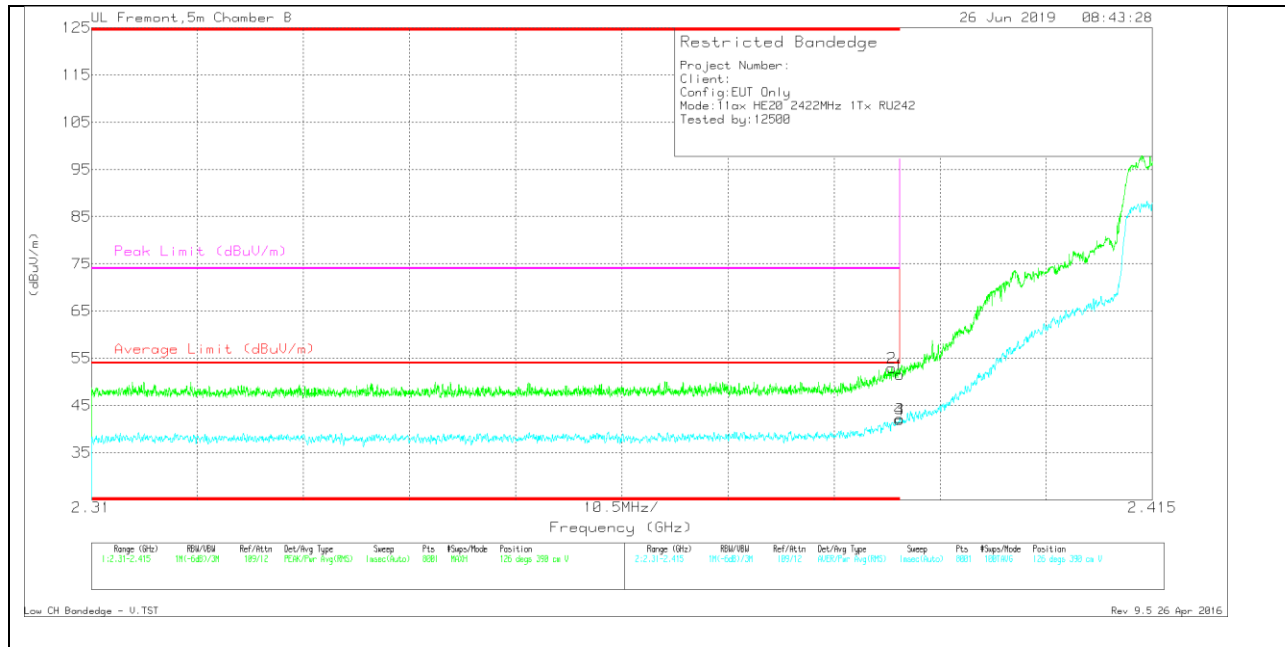

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.51	Pk	31.9	-18.9	51.51	-	-	74	-22.49	126	390	V
2	* 2.389	39.97	Pk	31.9	-18.9	52.97	-	-	74	-21.03	126	390	V
3	* 2.39	29.21	RMS	31.9	-18.9	42.21	54	-11.79	-	-	126	390	V
4	* 2.39	29.02	RMS	31.9	-18.9	42.02	54	-11.98	-	-	126	390	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

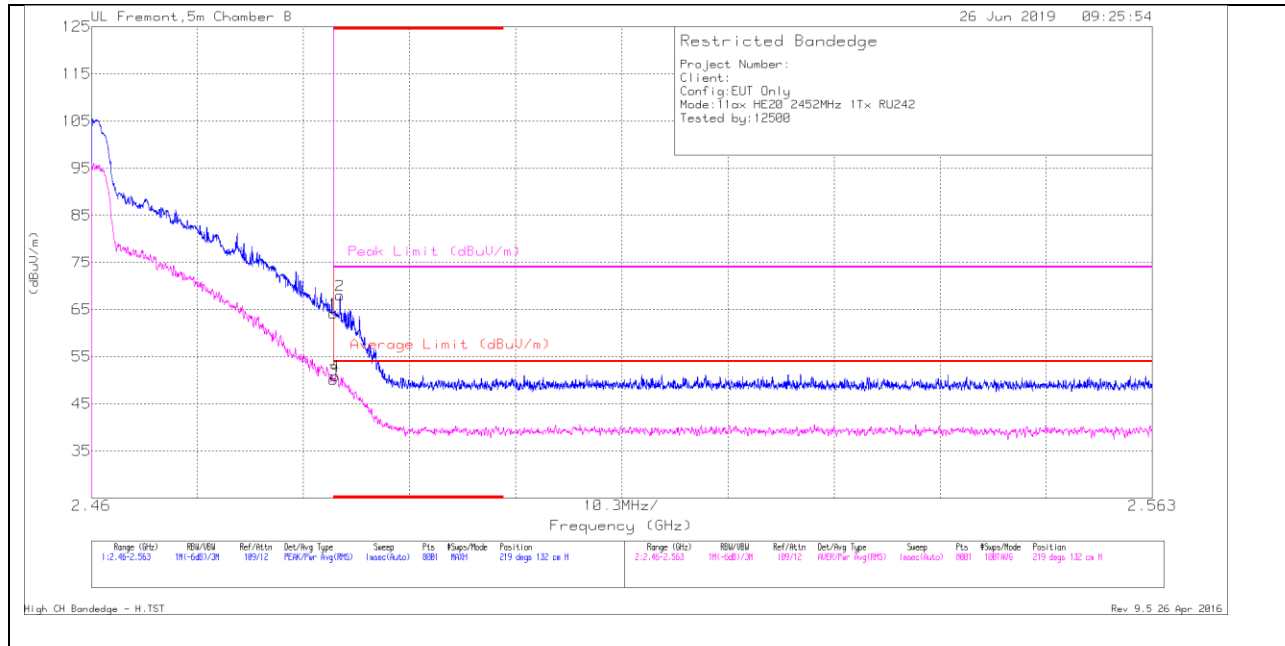


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.75	Pk	32.3	-18.9	64.15	-	-	74	-9.85	219	132	H
2	* 2.484	54.58	Pk	32.3	-18.9	67.98	-	-	74	-6.02	219	132	H
3	* 2.484	36.7	RMS	32.3	-18.9	50.1	54	-3.9	-	-	219	132	H
4	* 2.484	37.53	RMS	32.3	-18.9	50.93	54	-3.07	-	-	219	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

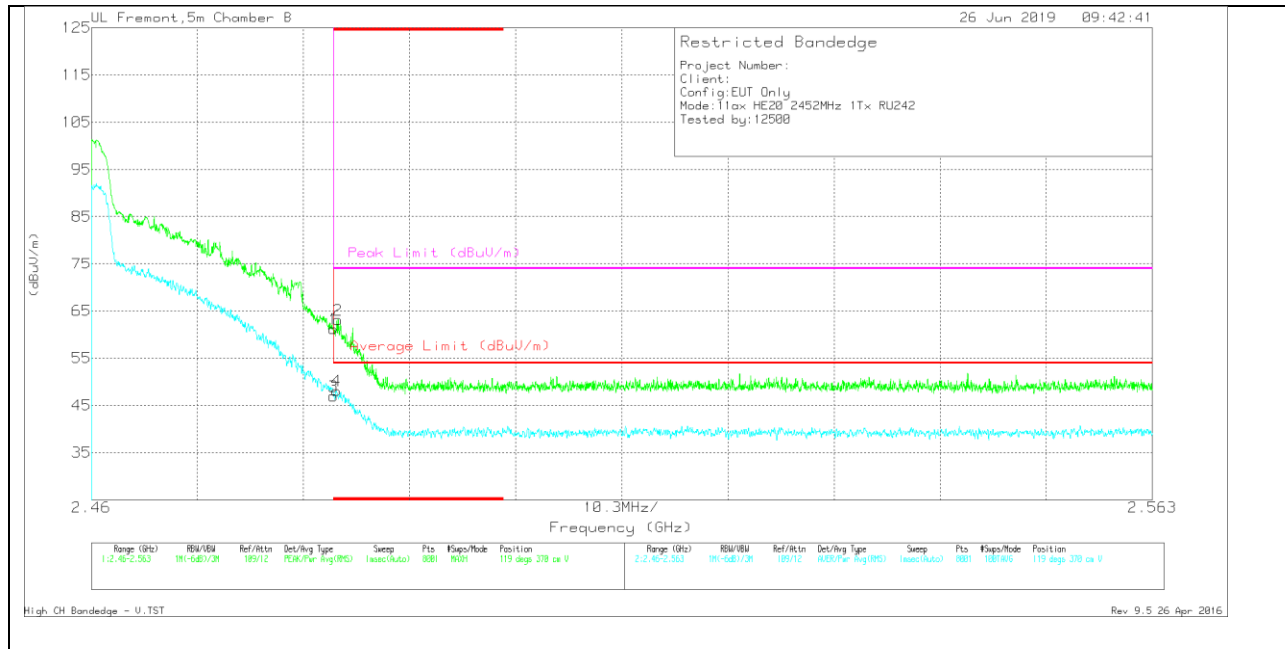


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.81	Pk	32.3	-18.9	61.21	-	-	74	-12.79	119	370	V
2	* 2.484	49.76	PK	32.3	-18.9	63.16	-	-	74	-10.84	119	370	V
3	* 2.484	33.57	RMS	32.3	-18.9	46.97	54	-7.03	-	-	119	370	V
4	* 2.484	34.74	RMS	32.3	-18.9	48.14	54	-5.86	-	-	119	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

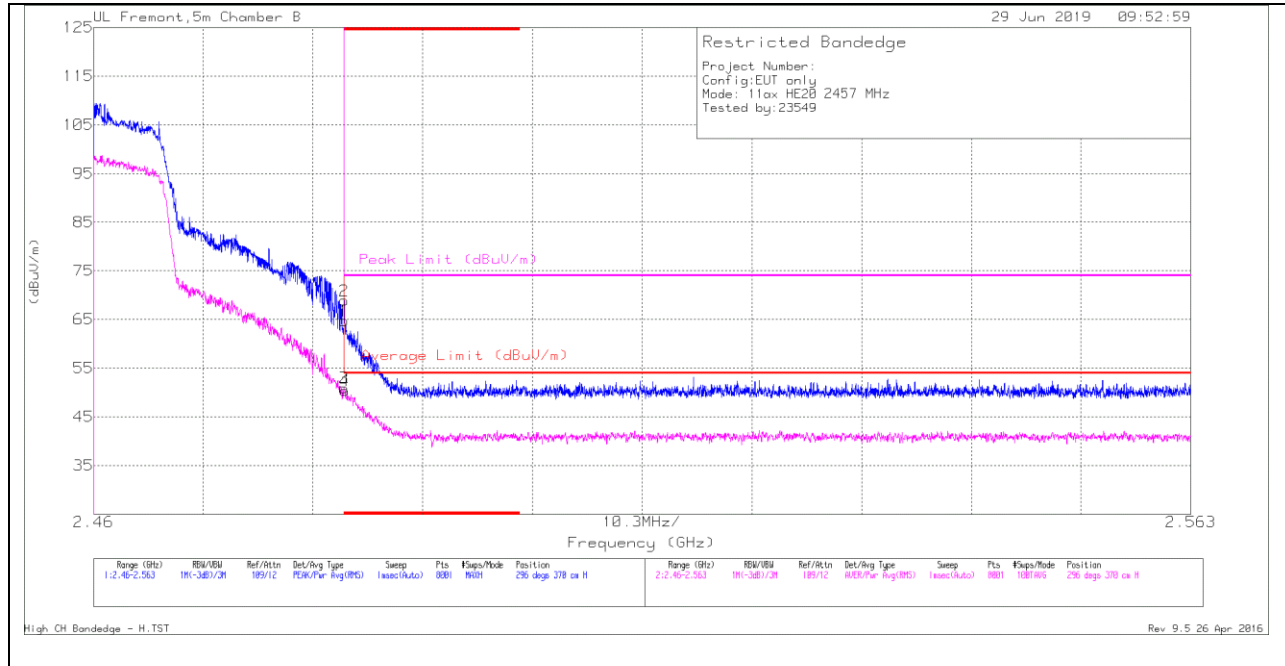


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.36	Pk	32.3	-18.9	64.76	-	-	74	-9.24	296	370	H
2	* 2.484	55.51	Pk	32.3	-18.9	68.91	-	-	74	-5.09	296	370	H
3	* 2.484	37.54	RMS	32.3	-18.9	50.94	54	-3.06	-	-	296	370	H
4	* 2.484	36.98	RMS	32.3	-18.9	50.38	54	-3.62	-	-	296	370	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

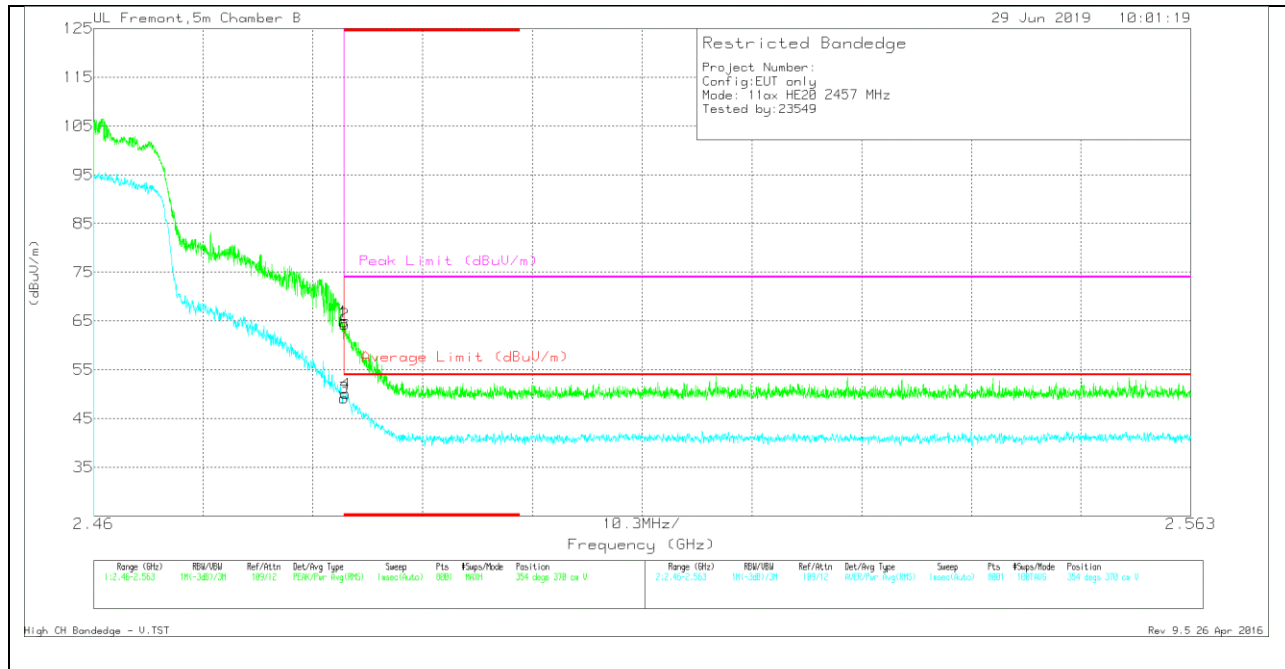

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.47	Pk	32.3	-18.9	64.87	-	-	74	-9.13	354	370	V
2	* 2.484	50.94	Pk	32.3	-18.9	64.34	-	-	74	-9.66	354	370	V
3	* 2.484	35.81	RMS	32.3	-18.9	49.21	54	-4.79	-	-	354	370	V
4	* 2.484	36.69	RMS	32.3	-18.9	50.09	54	-3.91	-	-	354	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

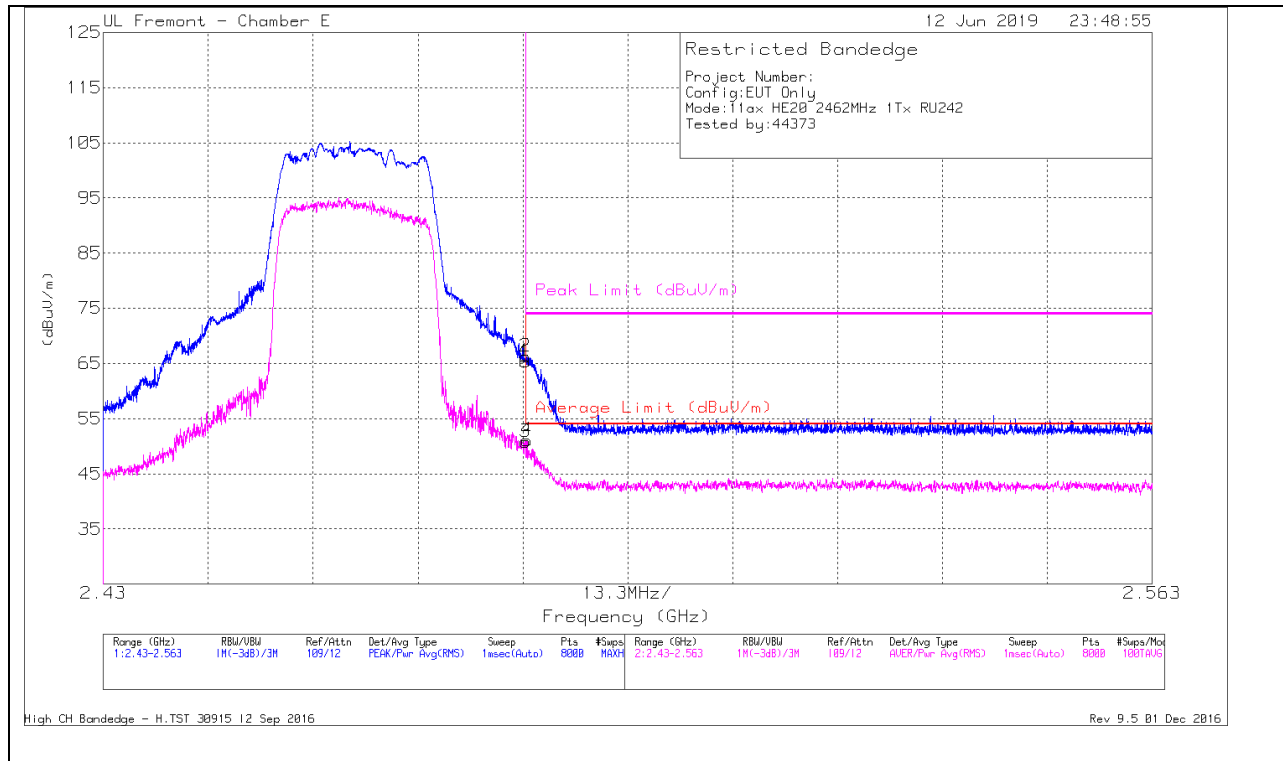


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.62	PK	32.8	-18.1	65.32	-	-	74	-8.68	30	172	H
2	* 2.484	51.56	PK	32.8	-18.1	66.26	-	-	74	-7.74	30	172	H
3	* 2.484	36.09	RMS	32.8	-18.1	50.79	54	-3.21	-	-	30	172	H
4	* 2.484	36.36	RMS	32.8	-18.1	51.06	54	-2.94	-	-	30	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

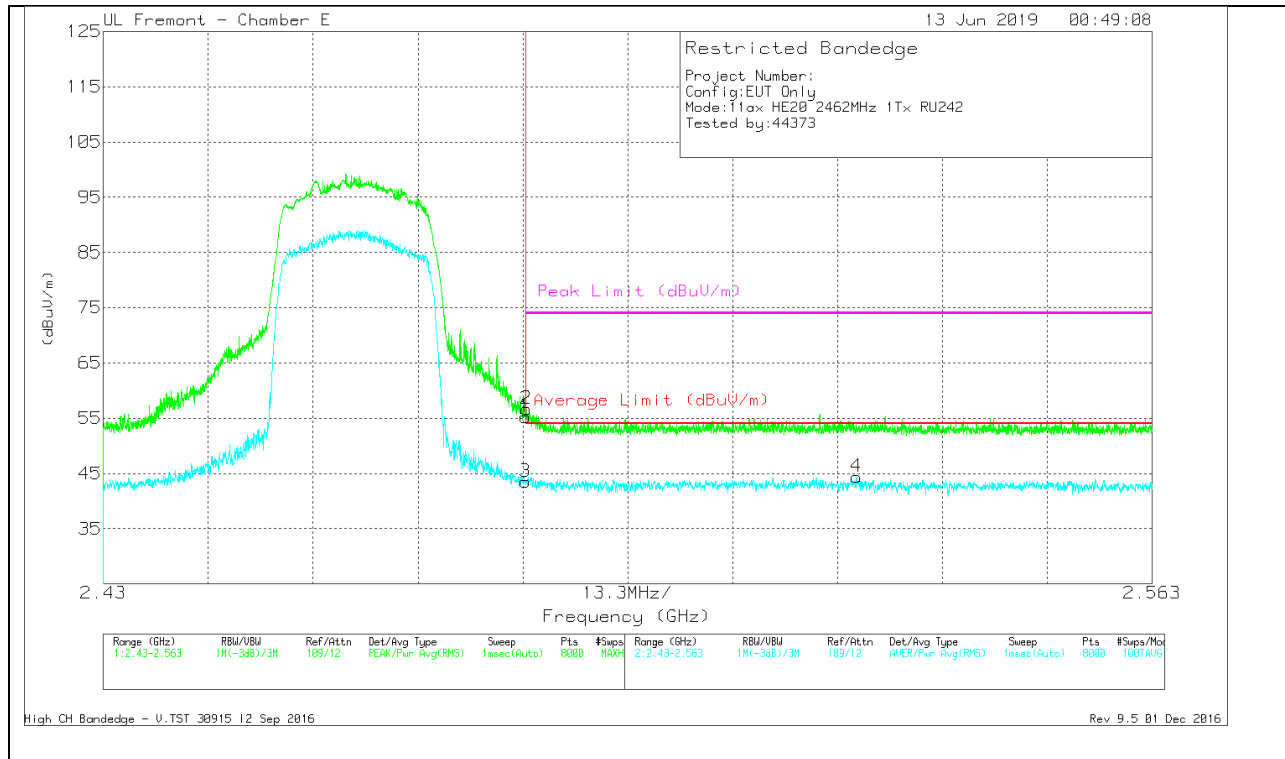

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.53	Pk	32.8	-18.1	55.23	-	-	74	-18.77	151	359	V
2	* 2.484	41.97	Pk	32.8	-18.1	56.67	-	-	74	-17.33	151	359	V
3	* 2.484	28.8	RMS	32.8	-18.1	43.5	54	-10.5	-	-	151	359	V
4	2.526	29.57	RMS	32.9	-18.1	44.37	54	-9.63	-	-	151	359	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

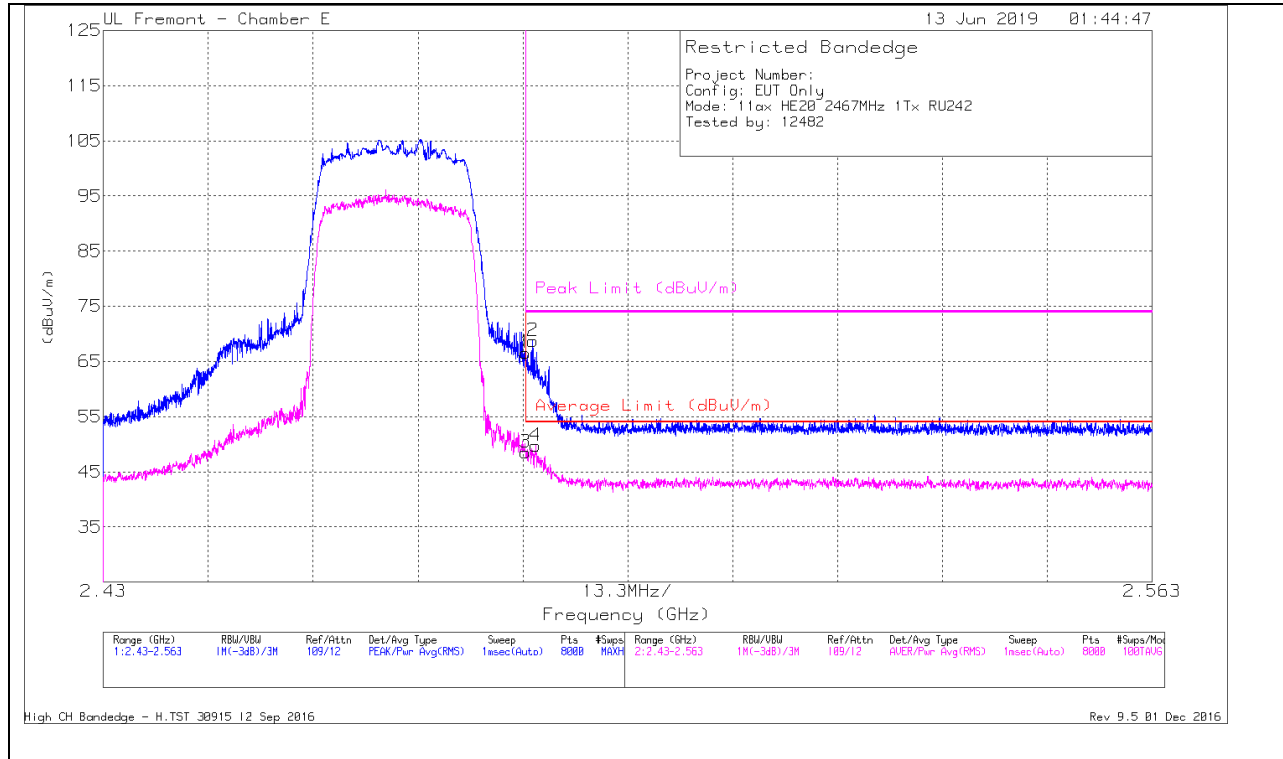


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.87	PK	32.8	-18.1	66.57	-	-	74	-7.43	38	179	H
2	* 2.484	54.03	PK	32.8	-18.1	68.73	-	-	74	-5.27	38	179	H
3	* 2.484	33.83	RMS	32.8	-18.1	48.53	54	-5.47	-	-	38	179	H
4	* 2.485	35.06	RMS	32.8	-18.1	49.76	54	-4.24	-	-	38	179	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

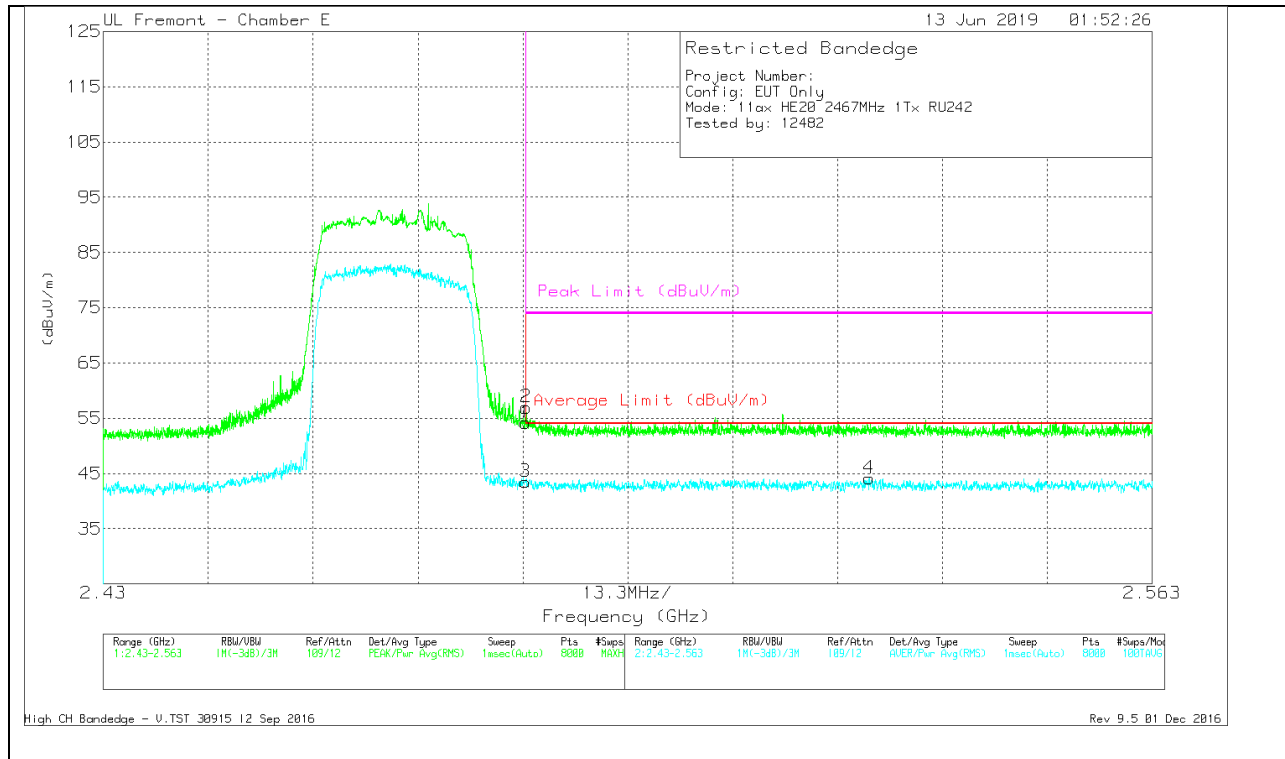

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.49	Pk	32.8	-18.1	54.19	-	-	74	-19.81	283	332	V
2	* 2.484	42.25	Pk	32.8	-18.1	56.95	-	-	74	-17.05	283	332	V
3	* 2.484	28.75	RMS	32.8	-18.1	43.45	54	-10.55	-	-	283	332	V
4	2.527	29.42	RMS	32.9	-18.2	44.12	54	-9.88	-	-	283	332	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection