

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 1.304	45.08	PK-U	29.7	-35.4	39.38	-	-	74	-34.62	-	-	264	193	H
	* 1.306	33.41	ADR	29.8	-35.4	27.81	54	-26.19	-	-	-	-	264	193	H
2	* 3.612	43.5	PK-U	33.3	-33.7	43.1	-	-	74	-30.9	-	-	84	155	H
	* 3.614	32.29	ADR	33.3	-33.7	31.89	54	-22.11	-	-	-	-	84	155	H
3	16.904	35.28	PK-U	41.4	-19.6	57.08	-	-	-	-	68.2	-11.12	125	137	H
4	* 3.263	45.07	PK-U	35.1	-34.5	45.67	-	-	74	-28.33	-	-	335	236	V
	* 3.262	33.13	ADR	35.1	-34.5	33.73	54	-20.27	-	-	-	-	335	236	V
5	* 7.434	38.75	PK-U	35.7	-28.3	46.15	-	-	74	-27.85	-	-	354	243	V
	* 7.436	27.81	ADR	35.7	-28.2	35.31	54	-18.69	-	-	-	-	354	243	V
6	14.736	36.14	PK-U	40.1	-20.7	55.54	-	-	-	-	68.2	-12.66	286	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

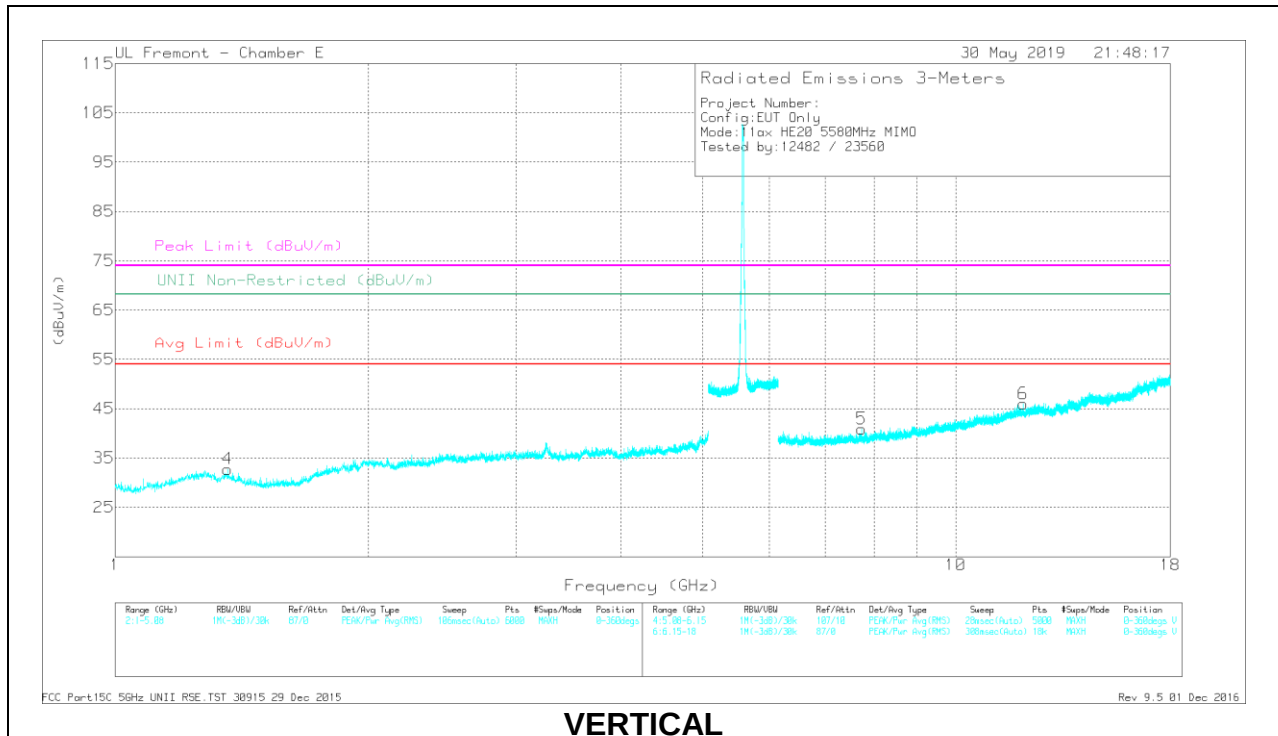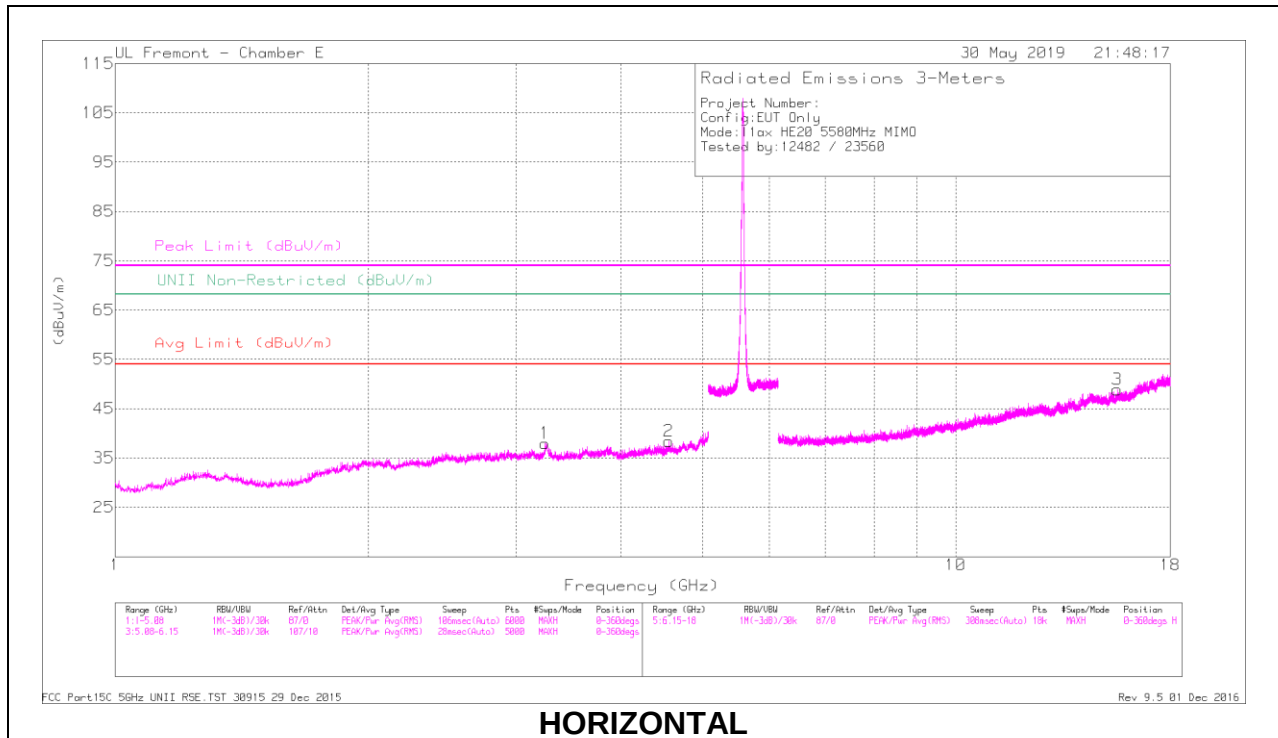

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	3.249	44.81	PK-U	34.3	-34.6	44.51	-	-	-	-	68.2	-23.69	202	167	H
2	* 4.559	43.02	PK-U	34.2	-31.5	45.72	-	-	74	-28.28	-	-	26	202	H
	* 4.558	31.06	ADR	34.2	-31.6	33.66	54	-20.34	-	-	-	-	26	202	H
3	* 15.564	35.15	PK-U	40.3	-20.6	54.85	-	-	74	-19.15	-	-	331	300	H
	* 15.561	24.32	ADR	40.3	-20.6	44.02	54	-9.98	-	-	-	-	331	300	H
4	* 1.361	45.73	PK-U	29.7	-35.5	39.93	-	-	74	-34.07	-	-	1	237	V
	* 1.361	33.66	ADR	29.7	-35.5	27.86	54	-26.14	-	-	-	-	1	237	V
5	* 7.724	39.14	PK-U	35.8	-28.2	46.74	-	-	74	-27.26	-	-	301	172	V
	* 7.727	28.04	ADR	35.8	-28.2	35.64	54	-18.36	-	-	-	-	301	172	V
6	* 12.028	35.38	PK-U	39.1	-22.7	51.78	-	-	74	-22.22	-	-	289	152	V
	* 12.025	24.59	ADR	39.1	-22.7	40.99	54	-13.01	-	-	-	-	289	152	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

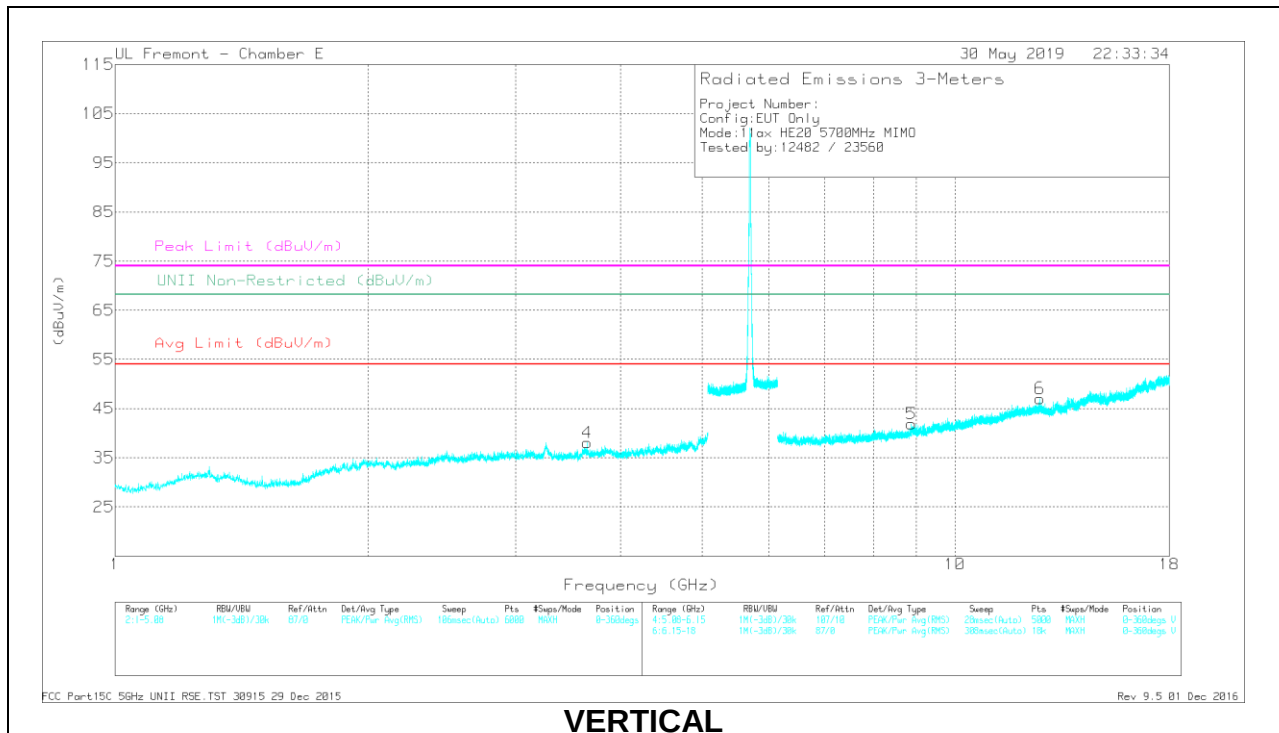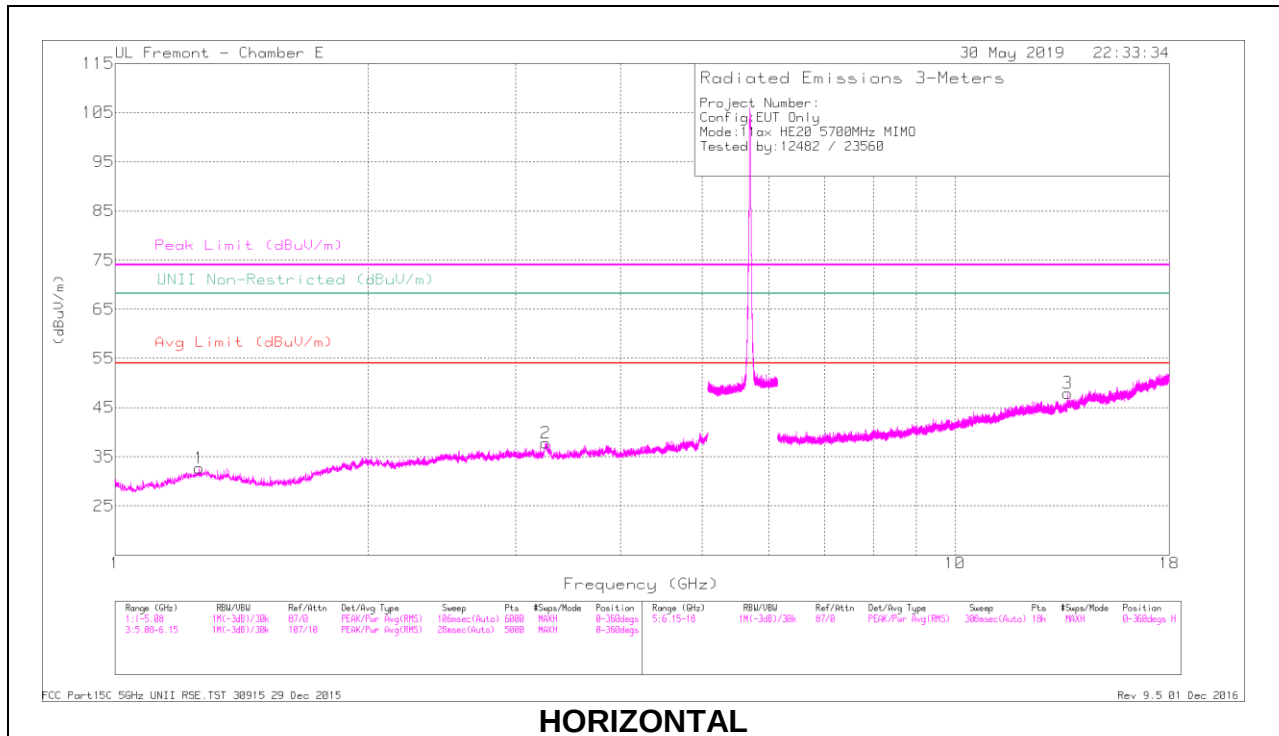

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26	45.1	PK-U	29.9	-35.4	39.6	-	-	74	-34.4	-	-	257	189	H
	* 1.26	33.36	ADR	29.9	-35.4	27.86	54	-26.14	-	-	-	-	257	189	H
2	* 12.628	35.79	PK-U	39	-21.9	52.89	-	-	74	-21.11	-	-	346	300	V
	* 12.627	24.31	ADR	39	-22	41.31	54	-12.69	-	-	-	-	346	300	V
3	13.608	36.09	PK-U	38.6	-21.6	53.09	-	-	-	-	68.2	-15.11	27	213	H
4	* 3.265	44.86	PK-U	35	-34.5	45.36	-	-	74	-28.64	-	-	133	158	H
	* 3.261	33.27	ADR	35.1	-34.5	33.87	54	-20.13	-	-	-	-	133	158	H
5	8.877	37.26	PK-U	36.1	-25.4	47.96	-	-	-	-	68.2	-20.24	147	101	V
6	* 3.647	43.48	PK-U	33.2	-33.6	43.08	-	-	74	-30.92	-	-	310	289	V
	* 3.648	32.29	ADR	33.2	-33.6	31.89	54	-22.11	-	-	-	-	310	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

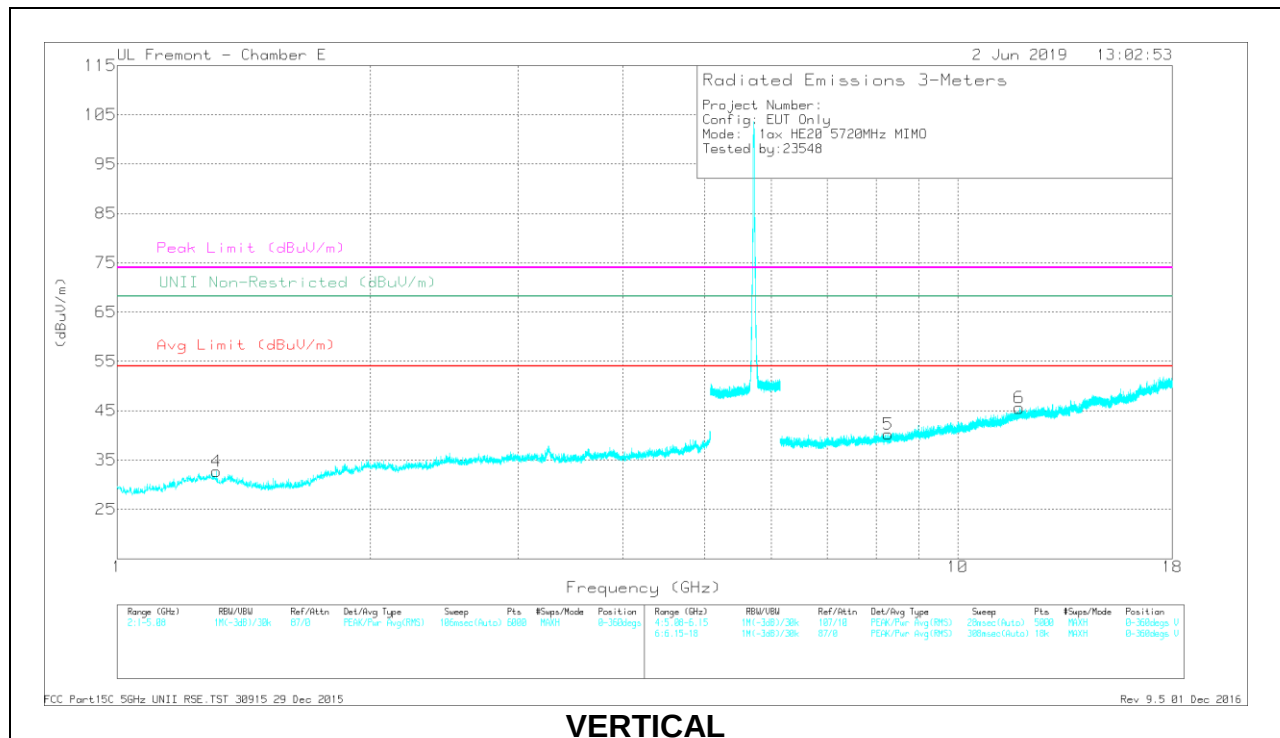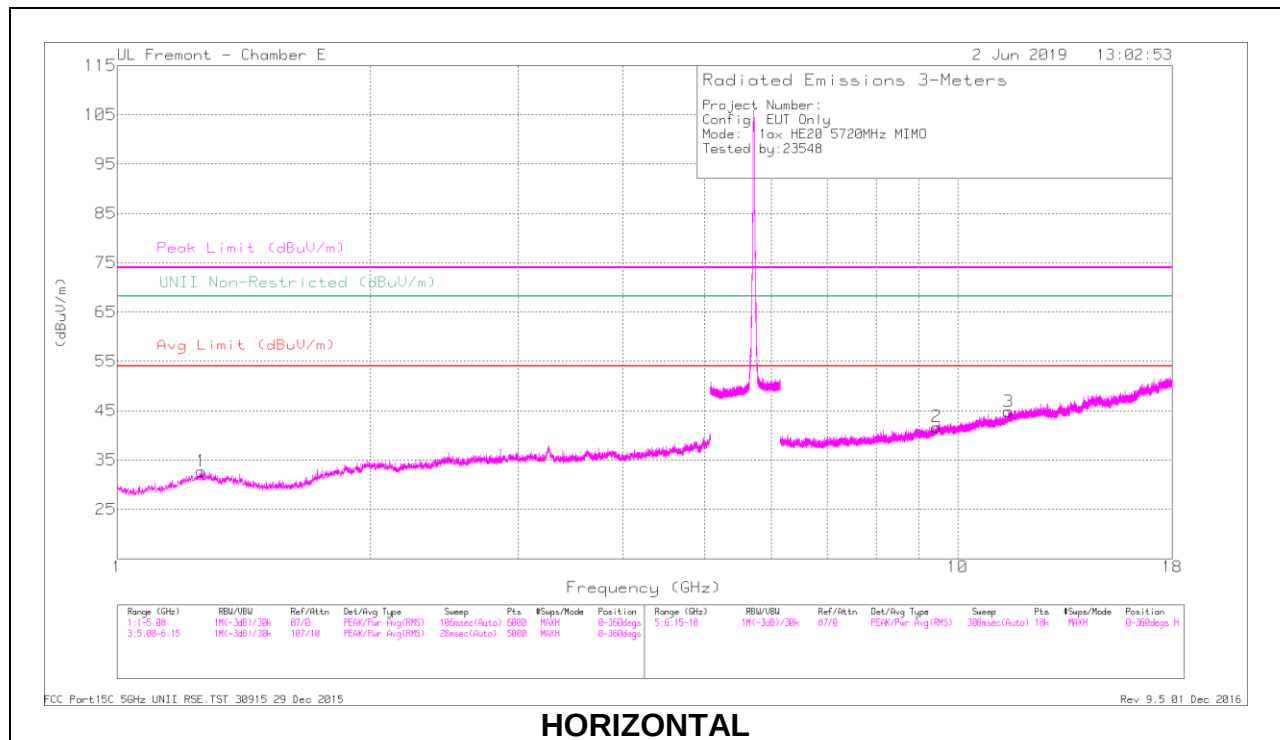


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26	44.98	PK-U	29.9	-35.4	39.48	-	-	74	-34.52	-	-	322	137	H
	* 1.262	32.9	ADR	30	-35.4	27.5	54	-26.5	-	-	-	-	322	137	H
2	* 9.435	36.84	PK-U	36.5	-25.1	48.24	-	-	74	-25.76	-	-	1	112	H
	* 9.435	25.35	ADR	36.5	-25.1	36.75	54	-17.25	-	-	-	-	1	112	H
3	* 11.496	36.21	PK-U	38.4	-23.4	51.21	-	-	74	-22.79	-	-	262	127	H
	* 11.494	24.57	ADR	38.4	-23.4	39.57	54	-14.43	-	-	-	-	262	127	H
4	* 1.314	44.91	PK-U	29.5	-35.5	38.91	-	-	74	-35.09	-	-	27	210	V
	* 1.311	32.84	ADR	29.7	-35.5	27.04	54	-26.96	-	-	-	-	27	210	V
5	* 8.272	38.1	PK-U	35.8	-27.3	46.6	-	-	74	-27.4	-	-	74	243	V
	* 8.272	26.44	ADR	35.8	-27.3	34.94	54	-19.06	-	-	-	-	74	243	V
6	* 11.836	35.92	PK-U	38.9	-23	51.82	-	-	74	-22.18	-	-	166	310	V
	* 11.834	24.2	ADR	38.9	-23	40.1	54	-13.9	-	-	-	-	166	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

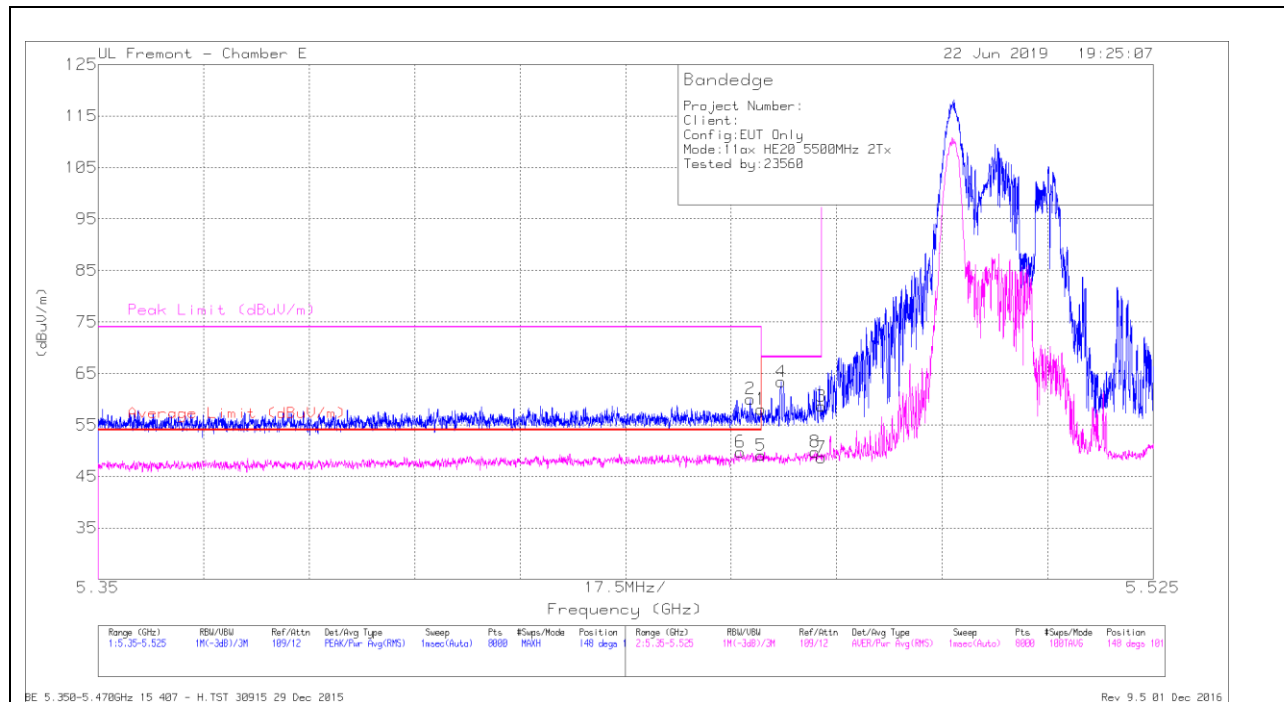2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.67	Pk	34.6	-17.2	58.07	-	-	74	-15.93	148	101	H
2	* 5.458	42.64	Pk	34.6	-17.2	60.04	-	-	74	-13.96	148	101	H
3	5.47	41.24	Pk	34.6	-17.2	58.64	-	-	68.2	-9.56	148	101	H
4	5.463	46.07	Pk	34.5	-17.2	63.37	-	-	68.2	-4.83	148	101	H
5	* 5.46	31.68	RMS	34.6	-17.2	49.08	54	-4.92	-	-	148	101	H
6	* 5.457	32.34	RMS	34.6	-17.2	49.74	54	-4.26	-	-	148	101	H
7	5.47	31.29	RMS	34.6	-17.2	48.69	-	-	-	-	148	101	H
8	5.469	32.36	RMS	34.6	-17.2	49.76	-	-	-	-	148	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

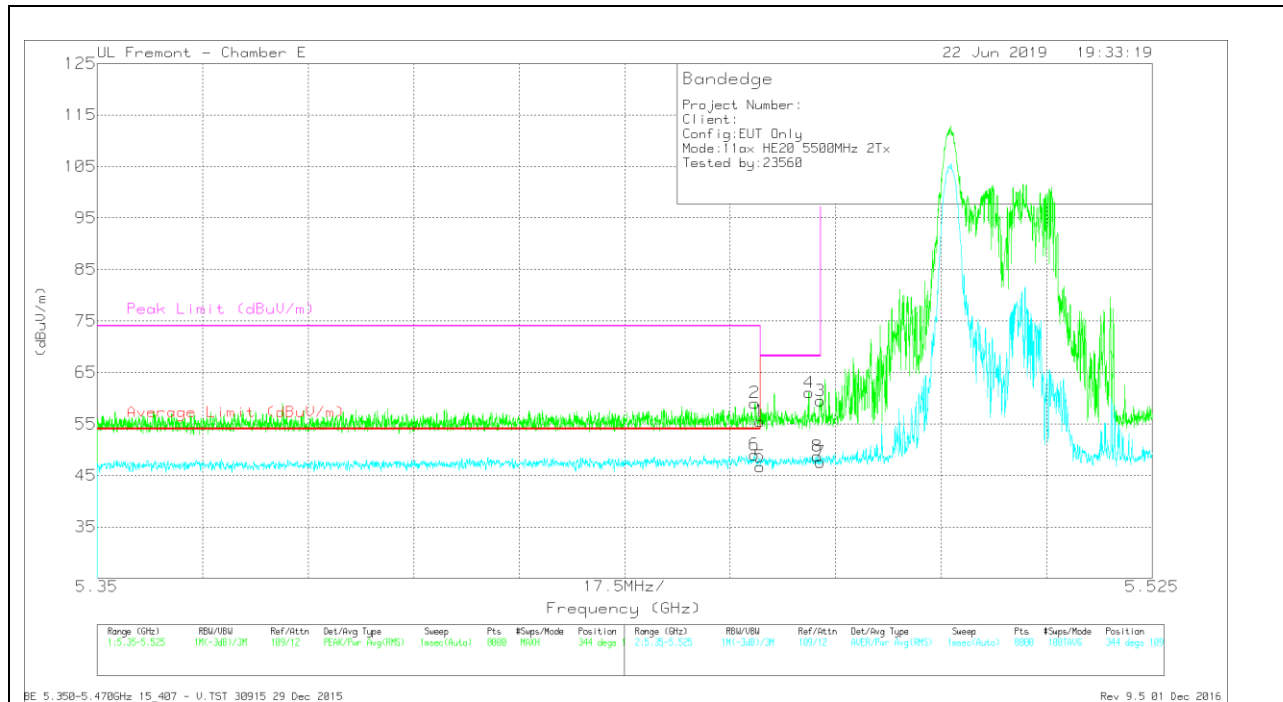


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.08	Pk	34.6	-17.2	55.48	-	-	74	-18.52	344	109	V
2	* 5.459	41.66	Pk	34.6	-17.2	59.06	-	-	74	-14.94	344	109	V
3	5.47	42.06	Pk	34.6	-17.2	59.46	-	-	68.2	-8.74	344	109	V
4	5.468	43.67	Pk	34.6	-17.2	61.07	-	-	68.2	-7.13	344	109	V
5	* 5.46	29.31	RMS	34.6	-17.2	46.71	54	-7.29	-	-	344	109	V
6	* 5.459	31.63	RMS	34.6	-17.2	49.03	54	-4.97	-	-	344	109	V
7	5.47	30.2	RMS	34.6	-17.2	47.6	-	-	-	-	344	109	V
8	5.469	31.35	RMS	34.6	-17.2	48.75	-	-	-	-	344	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

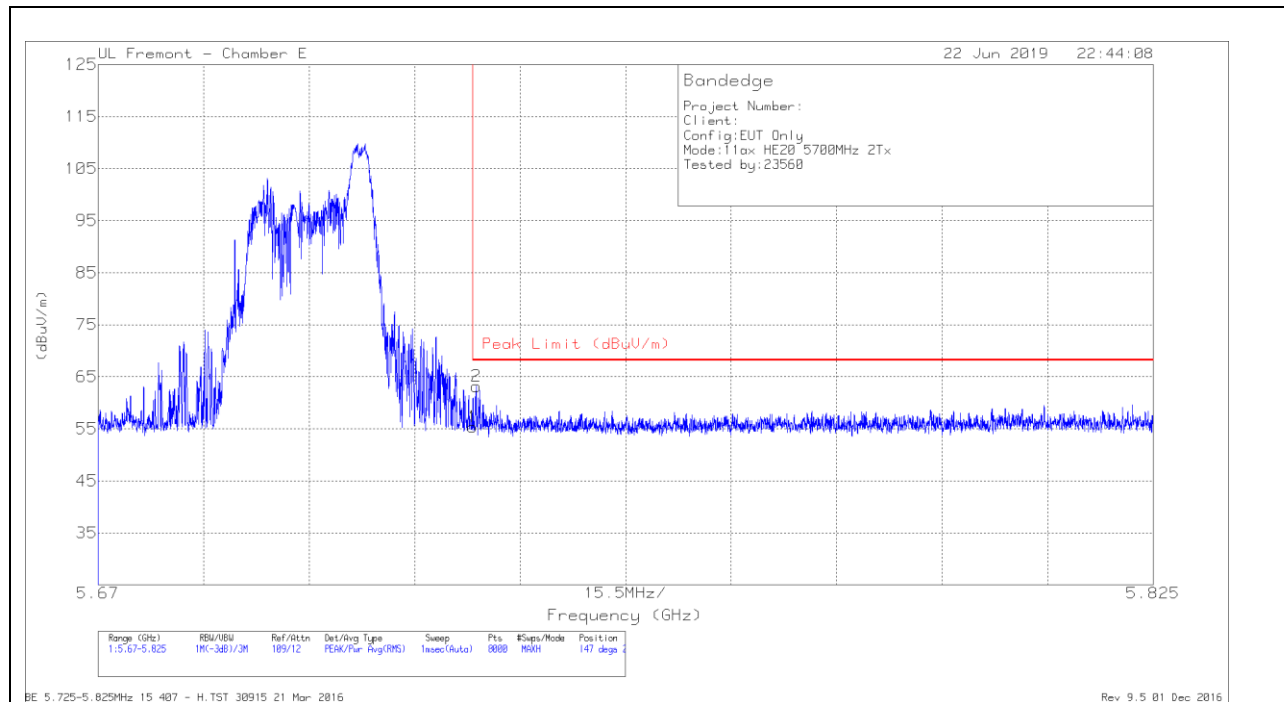2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.84	Pk	34.8	-17.3	55.34	68.2	-12.86	147	246	H
2	5.726	45.78	Pk	34.7	-17.3	63.18	68.2	-5.02	147	246	H

Pk - Peak detector

VERTICAL RESULT


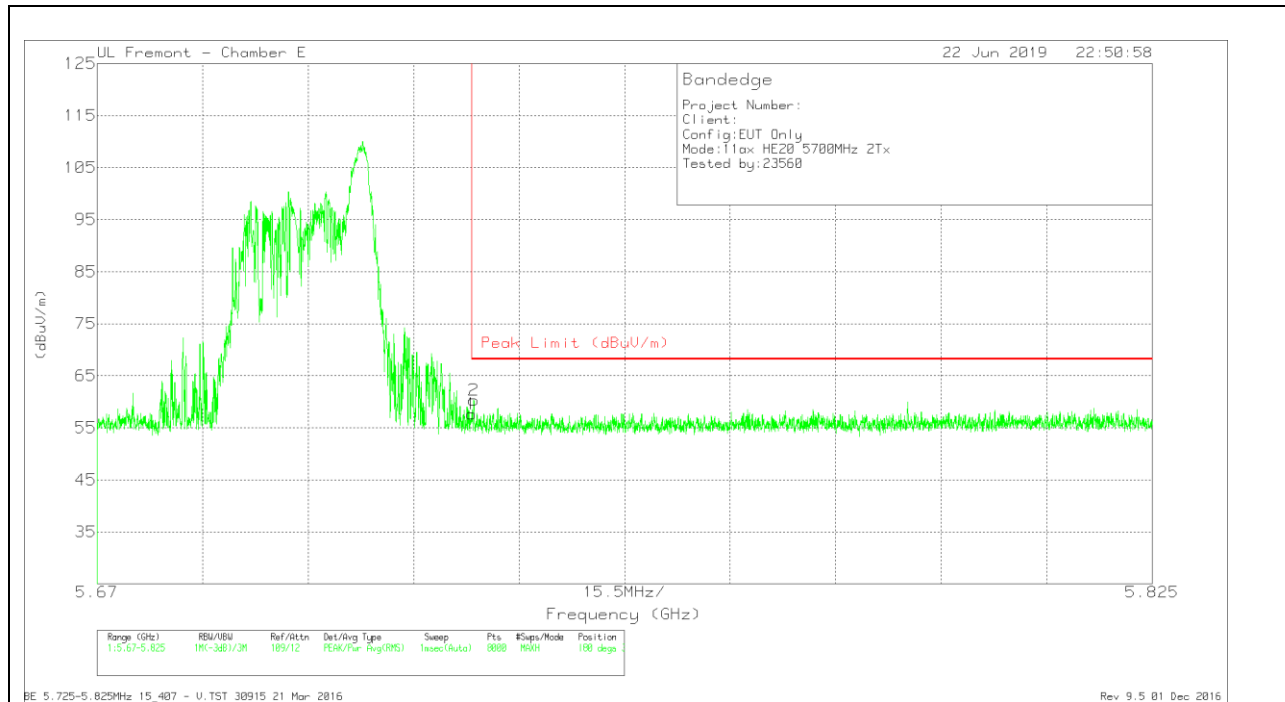


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.14	Pk	34.8	-17.3	57.64	68.2	-10.56	180	342	V
2	5.725	42.81	Pk	34.8	-17.3	60.31	68.2	-7.89	180	342	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

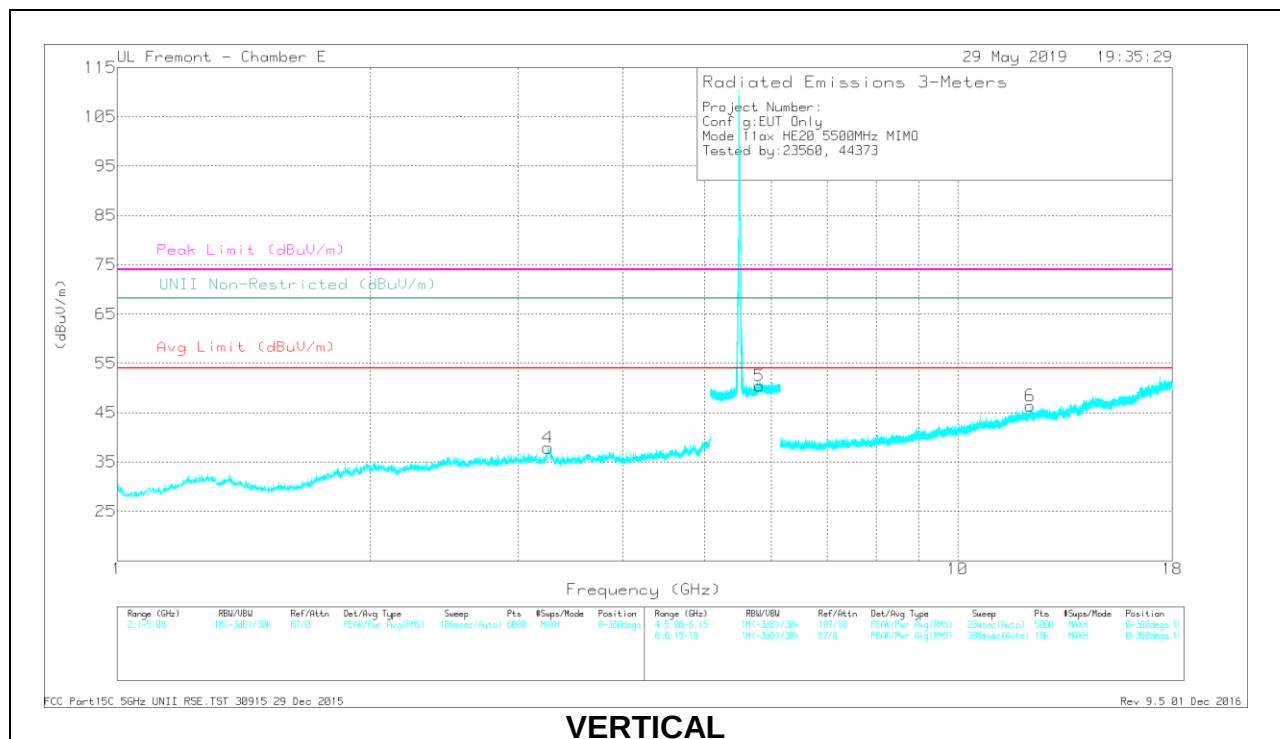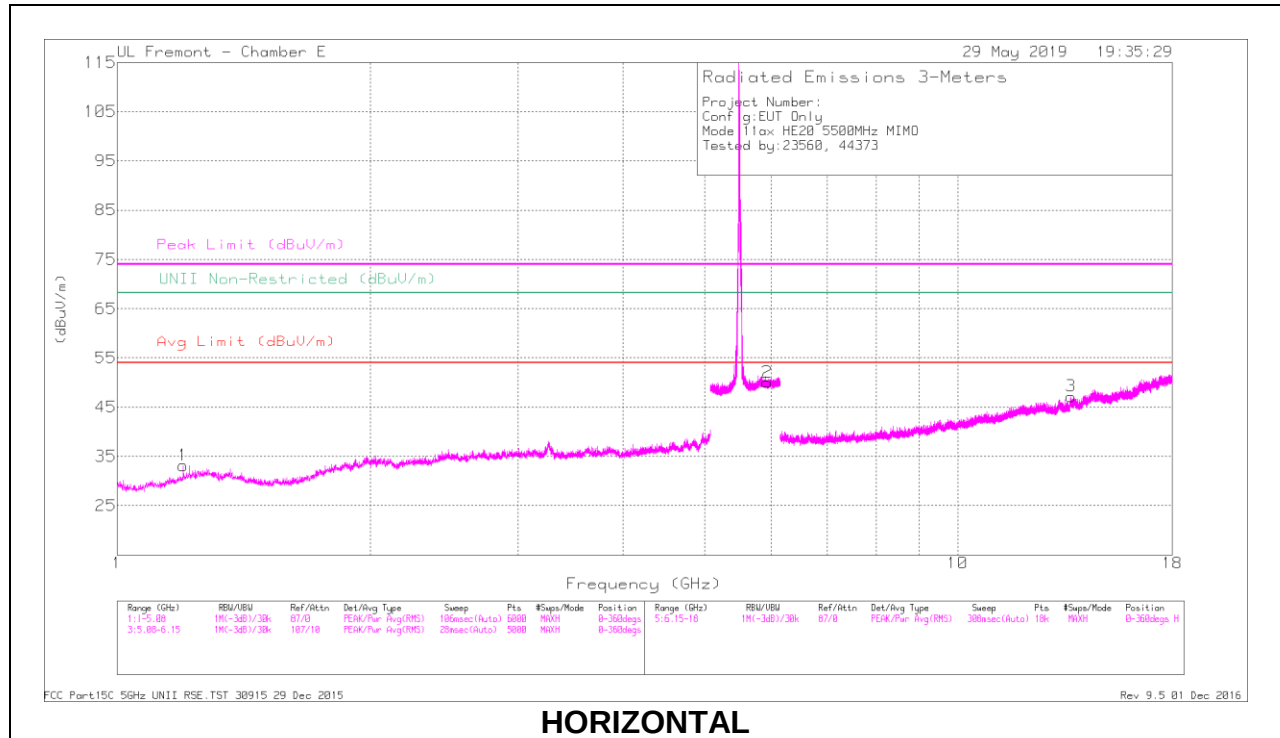

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.199	45	PK-U	29.5	-35.5	39	-	-	74	-35	-	-	202	263	H
	* 1.198	33.32	ADR	29.5	-35.5	27.32	54	-26.68	-	-	-	-	202	263	H
2	5.935	43.68	PK-U	35.1	-20.7	58.08	-	-	-	-	68.2	-10.12	170	290	H
3	13.639	36.86	PK-U	38.5	-21.6	53.76	-	-	-	-	68.2	-14.44	195	169	H
4	3.255	45.24	PK-U	34.7	-34.6	45.34	-	-	-	-	68.2	-22.86	181	211	V
5	5.81	43.49	PK-U	35	-20.4	58.09	-	-	-	-	68.2	-10.11	103	136	V
6	* 12.199	35.82	PK-U	39	-22.4	52.42	-	-	74	-21.58	-	-	15	160	V
	* 12.199	24.67	ADR	39	-22.4	41.27	54	-12.73	-	-	-	-	15	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

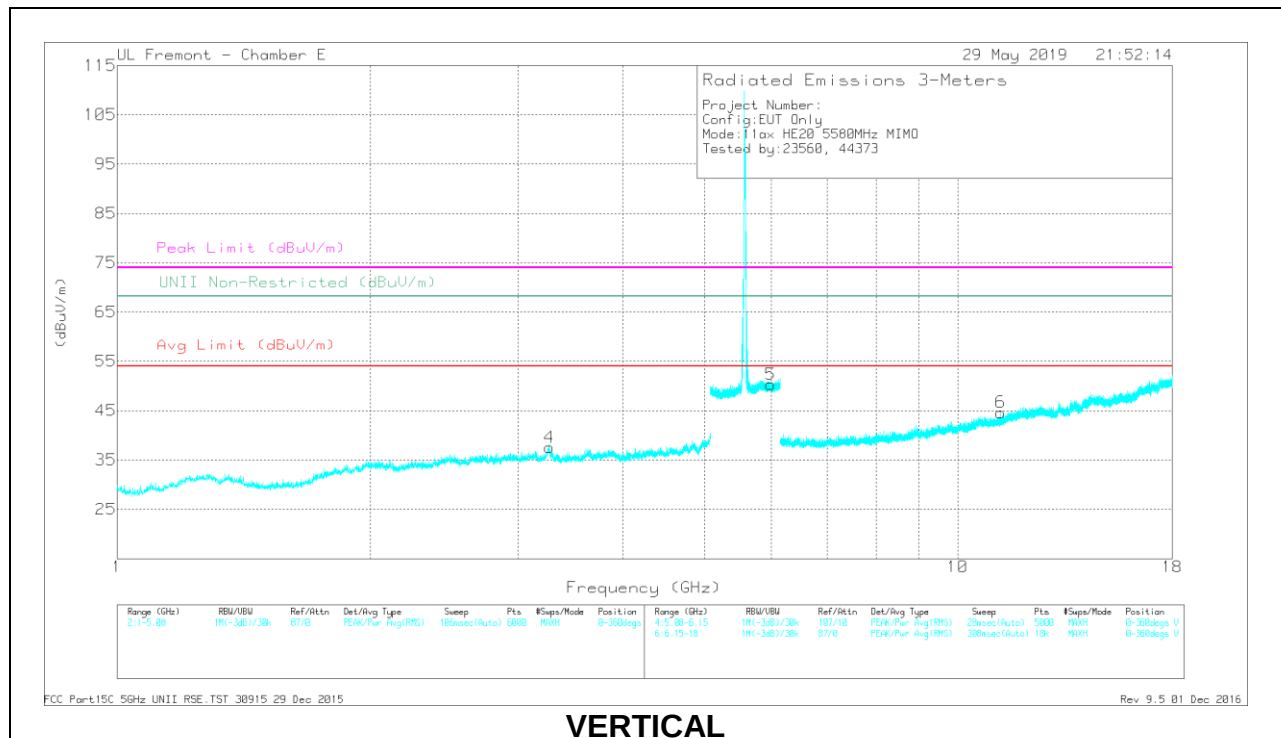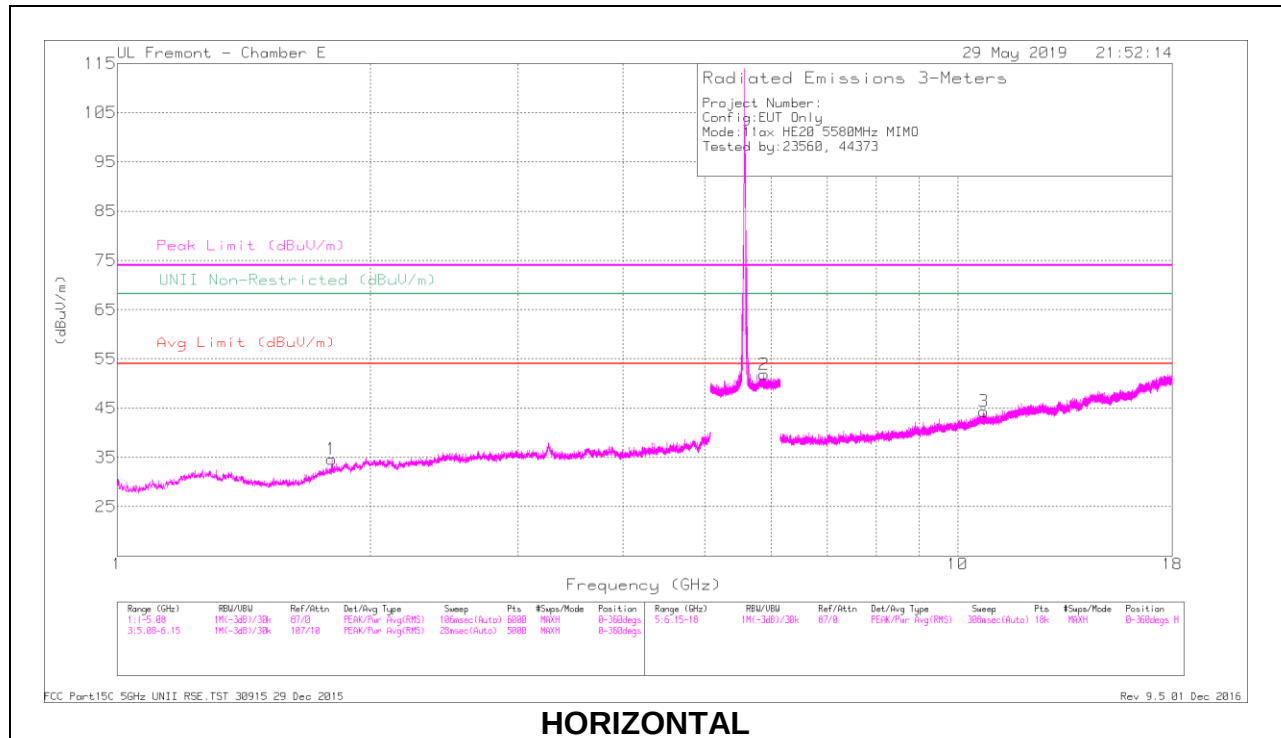

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.801	45.79	PK-U	30.4	-35.4	40.79	-	-	-	-	68.2	-27.41	330	172	H
2	5.882	43.13	PK-U	34.9	-20.5	57.53	-	-	-	-	68.2	-10.67	240	178	H
3	* 10.735	38.25	PK-U	37.9	-25.1	51.05	-	-	74	-22.95	-	-	174	178	H
	* 10.734	26.27	ADR	37.9	-25.1	39.07	54	-14.93	-	-	-	-	174	178	H
4	3.269	44.91	PK-U	34.8	-34.5	45.21	-	-	-	-	68.2	-22.99	274	198	V
5	5.992	43.16	PK-U	35.1	-20.5	57.76	-	-	-	-	68.2	-10.44	164	111	V
6	* 11.252	36.27	PK-U	38	-24	50.27	-	-	74	-23.73	-	-	83	116	V
	* 11.251	25.38	ADR	38	-24	39.38	54	-14.62	-	-	-	-	83	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

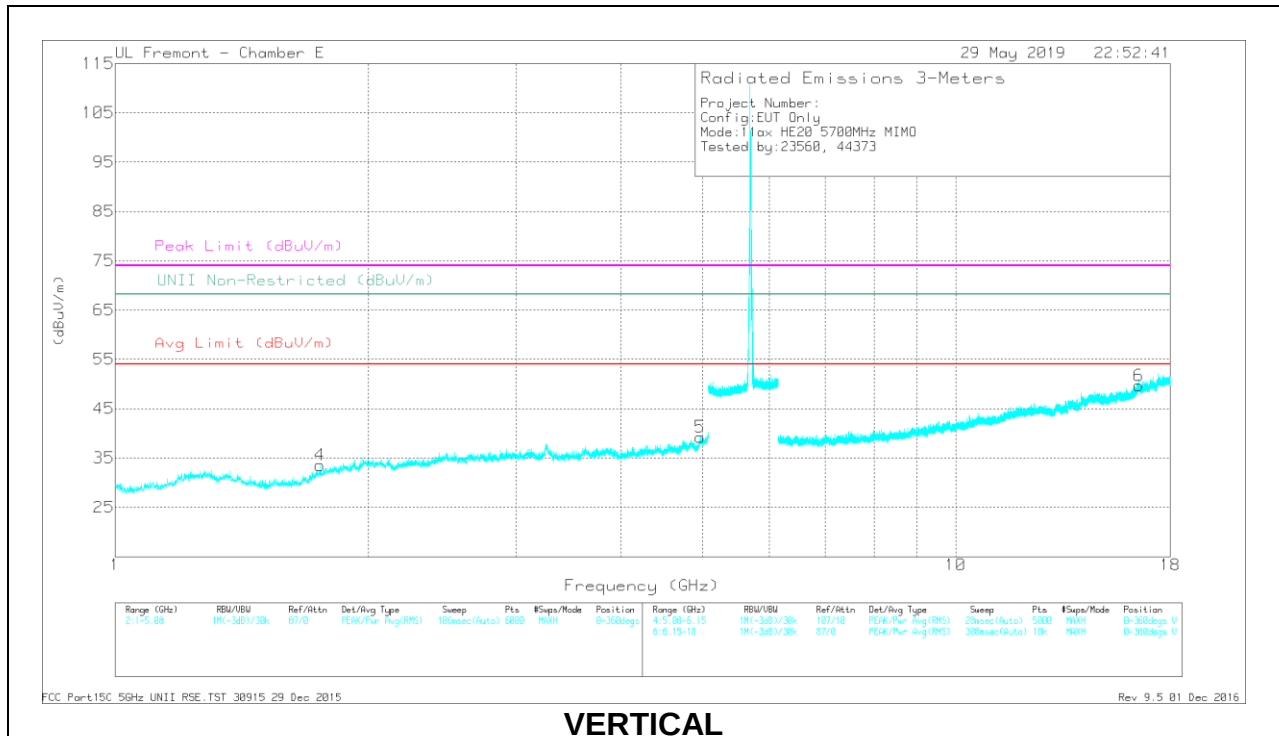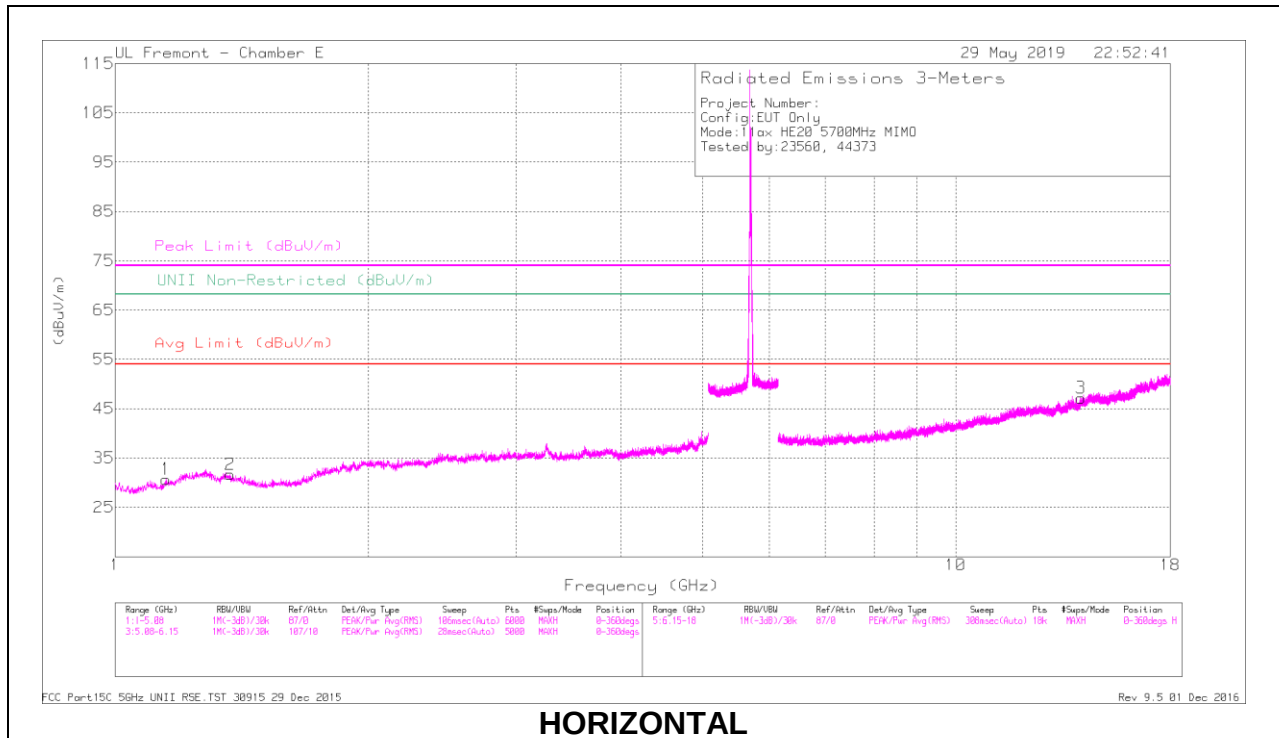

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 1.15	45.03	PK-U	28.2	-35.4	37.83	-	-	74	-36.17	-	-	205	275	H
	* 1.149	33.24	ADR	28.2	-35.4	26.04	54	-27.96	-	-	-	-	205	275	H
2	* 1.37	46.13	PK-U	29.7	-35.5	40.33	-	-	74	-33.67	-	-	175	178	H
	* 1.369	33.5	ADR	29.8	-35.5	27.8	54	-26.2	-	-	-	-	175	178	H
3	14.096	36.29	PK-U	38.7	-20.8	54.19	-	-	-	-	68.2	-14.01	209	162	H
4	1.755	45.91	PK-U	30	-35.5	40.41	-	-	-	-	68.2	-27.79	207	223	V
5	* 4.97	42.16	PK-U	34.1	-29.3	46.96	-	-	74	-27.04	-	-	176	191	V
	* 4.97	30.61	ADR	34.1	-29.3	35.41	54	-18.59	-	-	-	-	176	191	V
6	16.513	34.57	PK-U	41	-19	56.57	-	-	-	-	68.2	-11.63	225	123	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

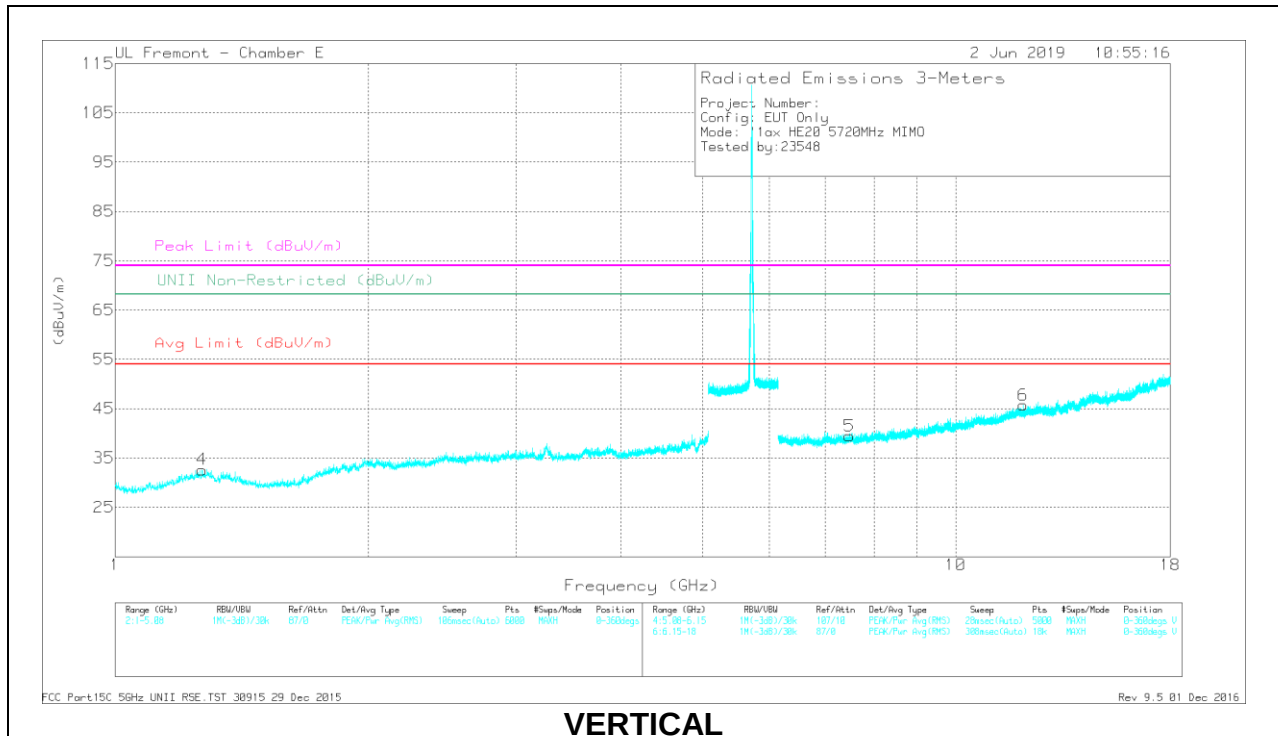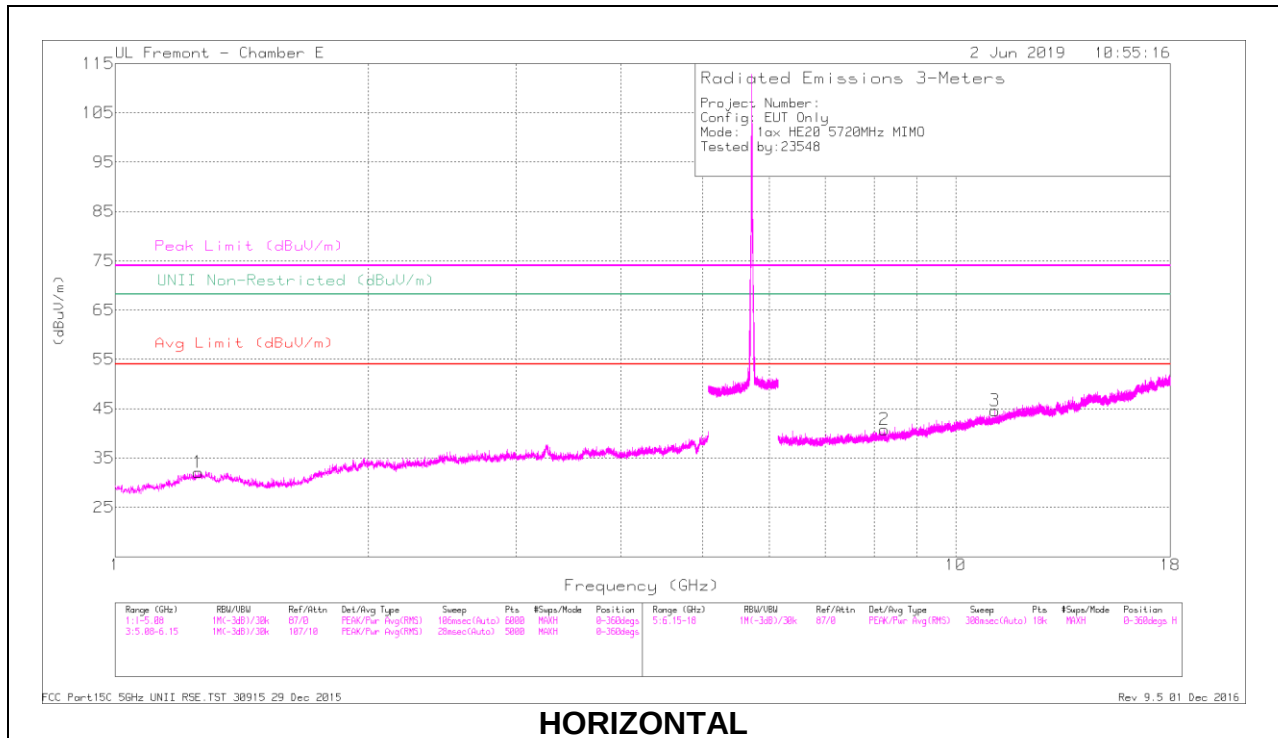

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.257	45.8	PK-U	29.9	-35.4	40.3	-	-	74	-33.7	-	-	240	251	H
	* 1.255	32.89	ADR	29.9	-35.3	27.49	54	-26.51	-	-	-	-	240	251	H
2	* 8.227	38.32	PK-U	35.8	-27.2	46.92	-	-	74	-27.08	-	-	160	109	H
	* 8.228	26.54	ADR	35.8	-27.2	35.14	54	-18.86	-	-	-	-	160	109	H
3	* 11.137	36.48	PK-U	37.9	-24.2	50.18	-	-	74	-23.82	-	-	177	338	H
	* 11.136	24.85	ADR	37.9	-24.2	38.55	54	-15.45	-	-	-	-	177	338	H
4	* 1.269	45.13	PK-U	30	-35.4	39.73	-	-	74	-34.27	-	-	174	283	V
	* 1.271	32.79	ADR	30.1	-35.4	27.49	54	-26.51	-	-	-	-	174	283	V
5	* 7.477	38.72	PK-U	35.7	-27.8	46.62	-	-	74	-27.38	-	-	176	101	V
	* 7.475	26.98	ADR	35.8	-27.8	34.98	54	-19.02	-	-	-	-	176	101	V
6	* 12.026	35.45	PK-U	39.1	-22.7	51.85	-	-	74	-22.15	-	-	0	217	V
	* 12.027	23.85	ADR	39.1	-22.7	40.25	54	-13.75	-	-	-	-	0	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

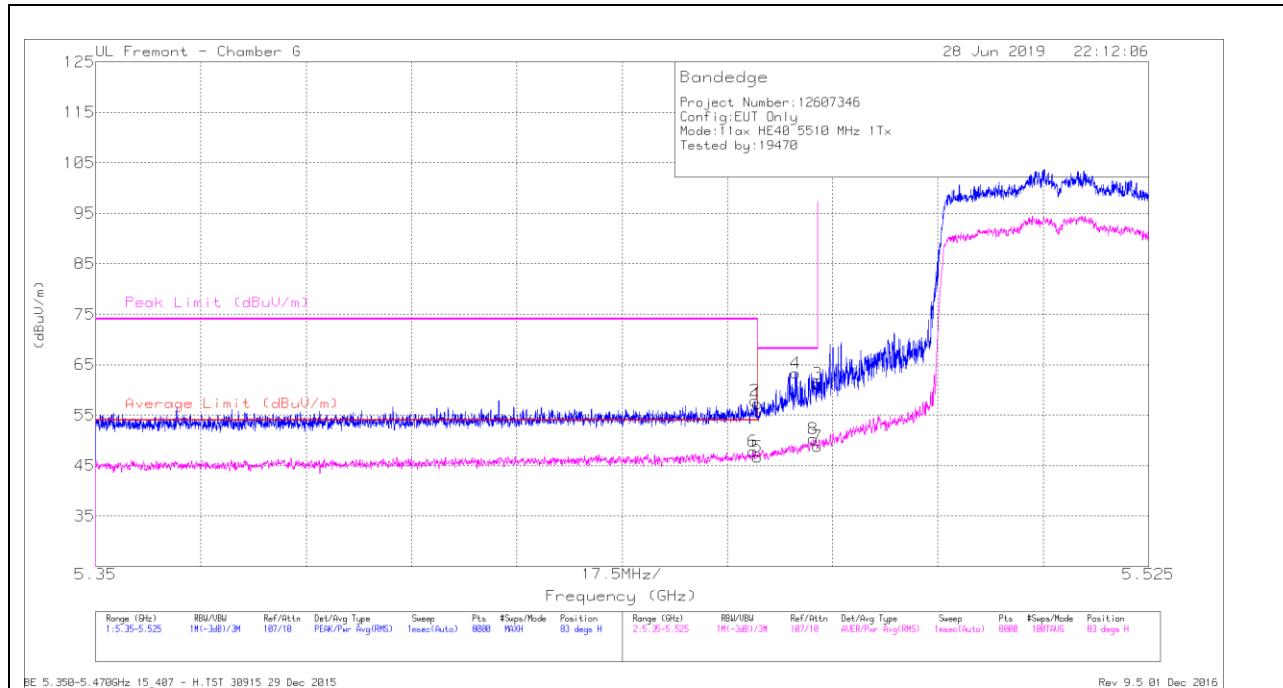


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.75	Pk	34.7	-20.2	57.25	-	-	74	-16.75	83	140	H
2	* 5.46	43.38	Pk	34.7	-20.2	57.88	-	-	74	-16.12	83	140	H
3	5.47	46.79	Pk	34.6	-20.2	61.19	-	-	68.2	-7.01	83	140	H
4	5.466	48.98	Pk	34.6	-20.2	63.38	-	-	68.2	-4.82	83	140	H
5	* 5.46	32.2	RMS	34.7	-20.2	46.7	54	-7.3	-	-	83	140	H
6	* 5.459	33.25	RMS	34.7	-20.1	47.85	54	-6.15	-	-	83	140	H
7	5.47	34.44	RMS	34.6	-20.2	48.84	-	-	-	-	83	140	H
8	5.469	35.74	RMS	34.7	-20.2	50.24	-	-	-	-	83	140	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

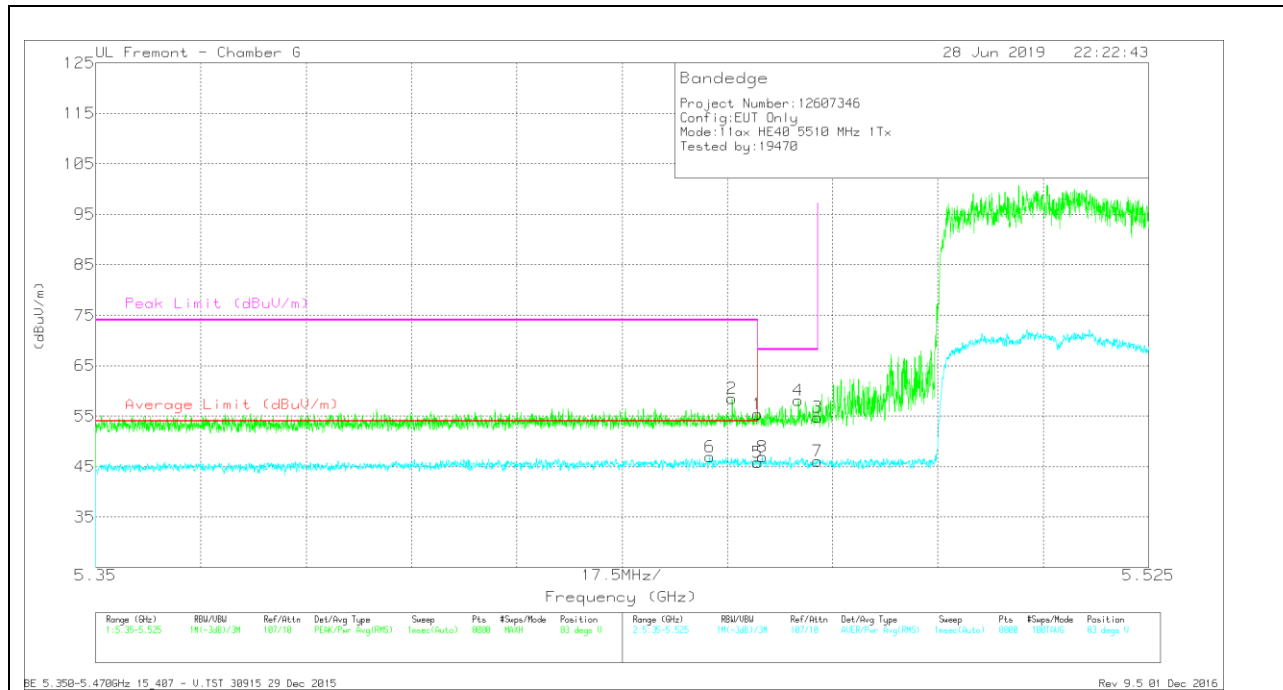


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.88	Pk	34.7	-20.2	55.38	-	-	74	-18.62	83	140	V
2	* 5.456	43.74	Pk	34.8	-20.1	58.44	-	-	74	-15.56	83	140	V
3	5.47	40.35	Pk	34.6	-20.2	54.75	-	-	68.2	-13.45	83	140	V
4	5.467	43.69	Pk	34.6	-20.2	58.09	-	-	68.2	-10.11	83	140	V
5	* 5.46	31.37	RMS	34.7	-20.2	45.87	54	-8.13	-	-	83	140	V
6	* 5.452	32.29	RMS	34.7	-20.1	46.89	54	-7.11	-	-	83	140	V
7	5.47	31.62	RMS	34.6	-20.2	46.02	-	-	-	-	83	140	V
8	5.461	32.48	RMS	34.7	-20.2	46.98	-	-	-	-	83	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

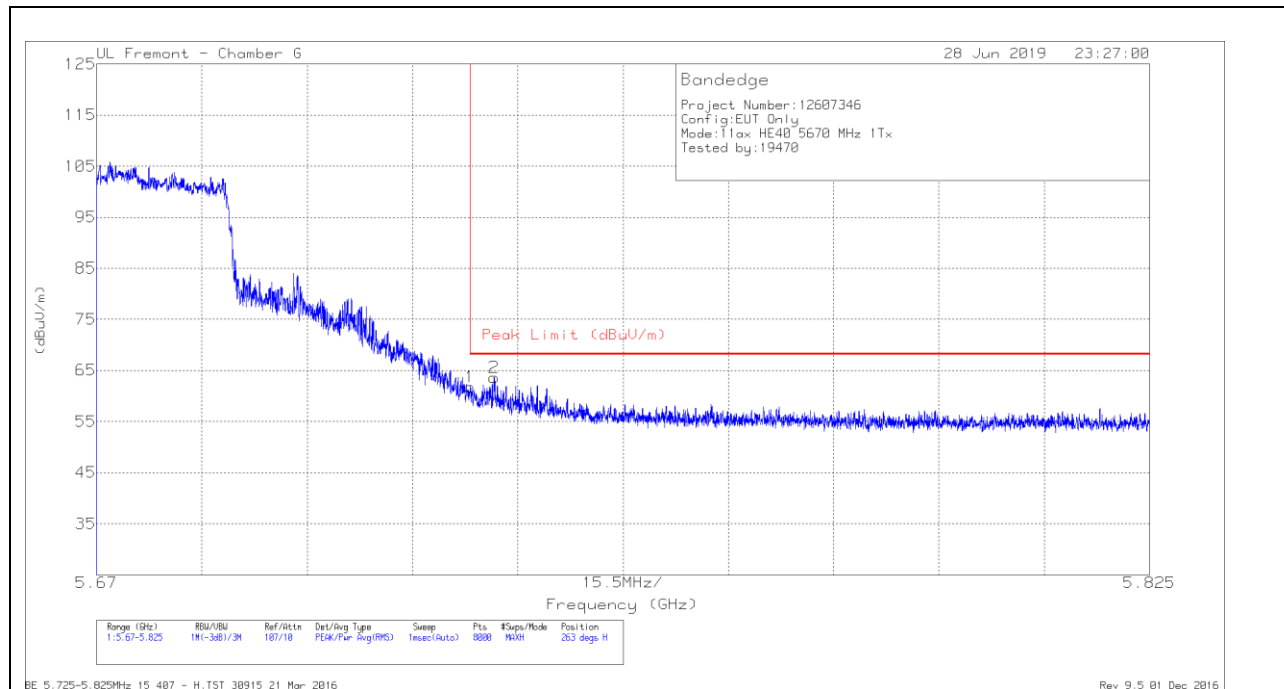1TX Antenna 5 MODE – 484 Tones, RU Index 65**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.68	Pk	35.1	-20	61.78	68.2	-6.42	263	140	H
2	5.729	48.39	Pk	35.1	-19.9	63.59	68.2	-4.61	263	140	H


Pk - Peak detector

VERTICAL RESULT

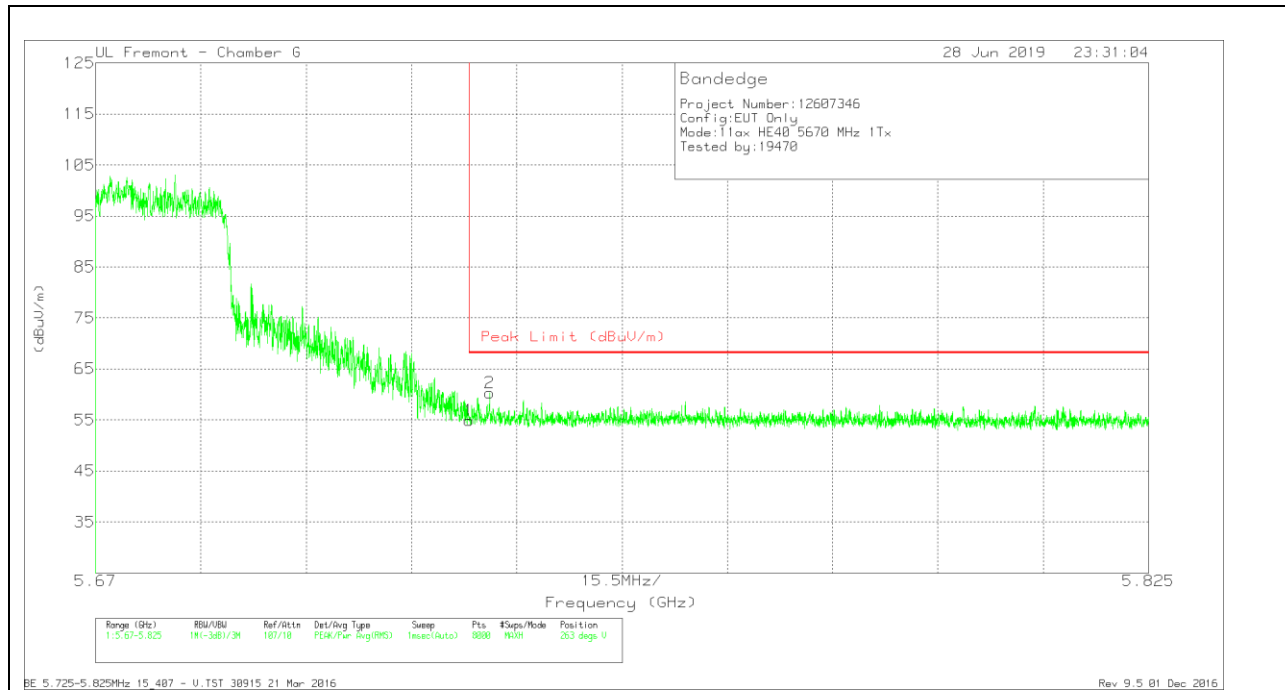

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.79	Pk	35.1	-20	54.89	68.2	-13.31	263	140	V
2	5.728	45.22	Pk	35.1	-20	60.32	68.2	-7.88	263	140	V

Pk - Peak detector

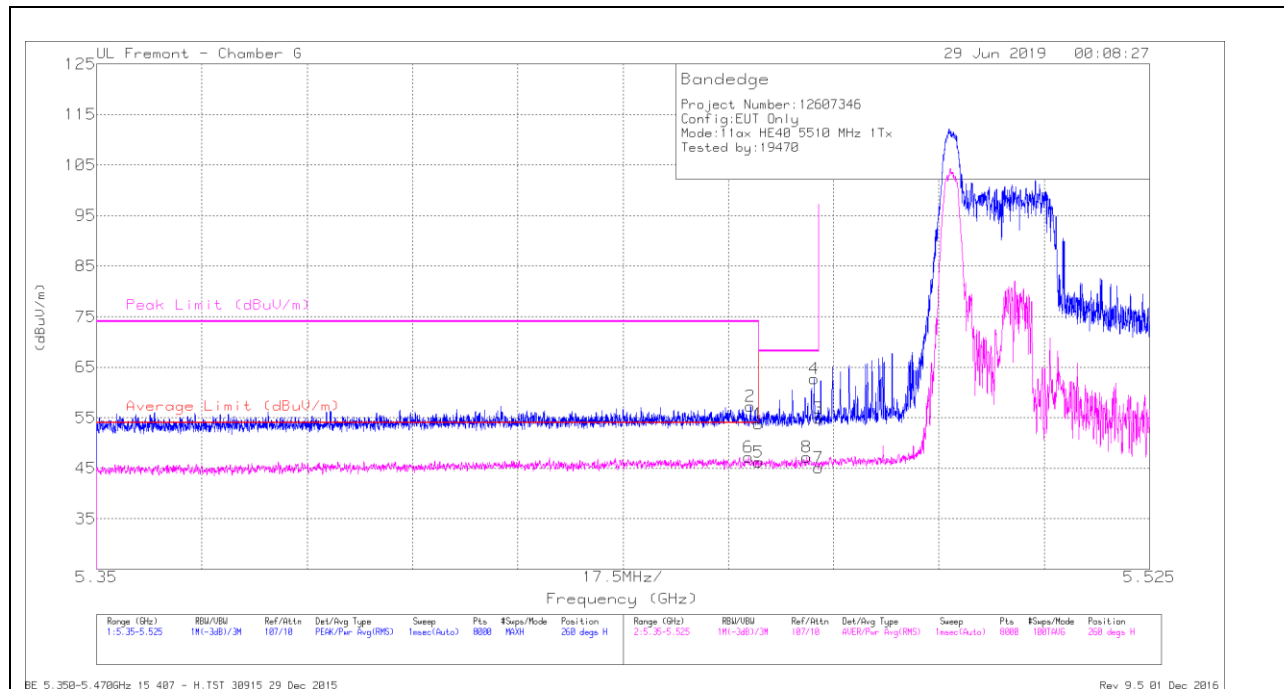1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.28	Pk	34.7	-20.2	53.78	-	-	74	-20.22	260	155	H
2	* 5.459	42.62	Pk	34.7	-20.1	57.22	-	-	74	-16.78	260	155	H
3	5.47	40.46	Pk	34.6	-20.2	54.86	-	-	68.2	-13.34	260	155	H
4	5.469	48.21	Pk	34.7	-20.2	62.71	-	-	68.2	-5.49	260	155	H
5	* 5.46	31.66	RMS	34.7	-20.2	46.16	54	-7.84	-	-	260	155	H
6	* 5.458	32.64	RMS	34.7	-20.1	47.24	54	-6.76	-	-	260	155	H
7	5.47	30.64	RMS	34.6	-20.2	45.04	-	-	-	-	260	155	H
8	5.468	32.81	RMS	34.6	-20.2	47.21	-	-	-	-	260	155	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

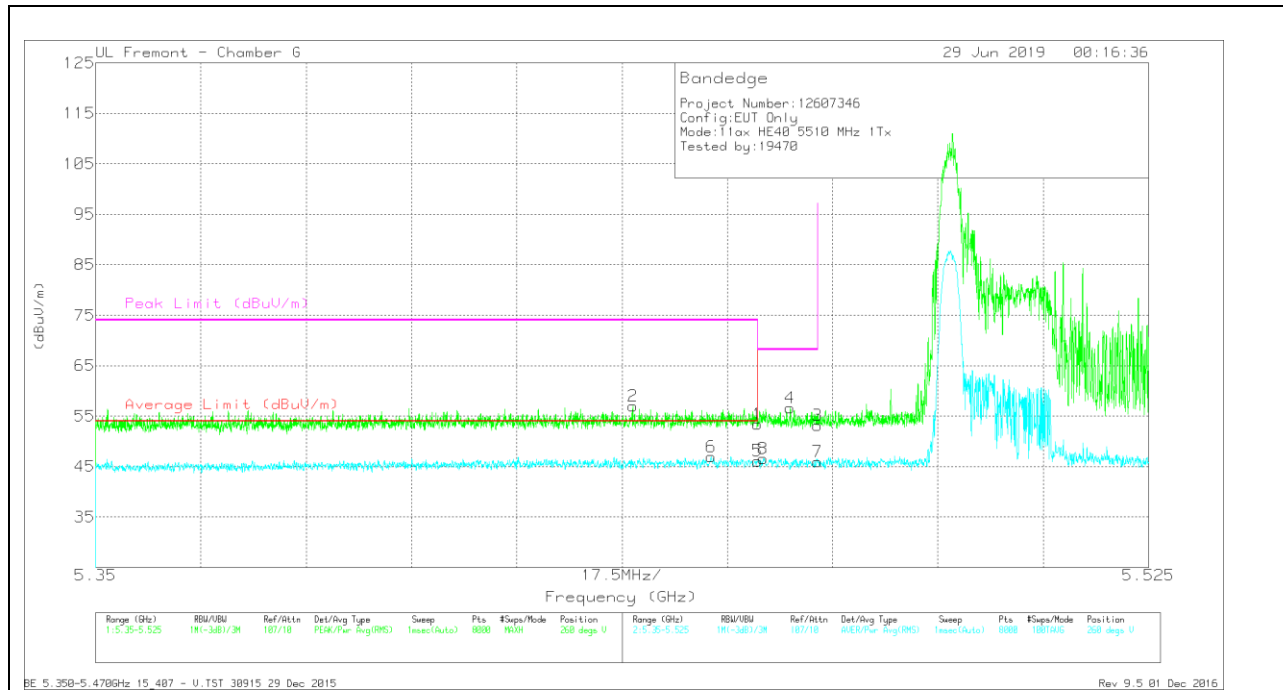


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.87	Pk	34.7	-20.2	53.37	-	-	74	-20.63	260	155	V
2	* 5.439	42.35	Pk	34.7	-20.1	56.95	-	-	74	-17.05	260	155	V
3	5.47	38.78	Pk	34.6	-20.2	53.18	-	-	68.2	-15.02	260	155	V
4	5.465	42.27	Pk	34.6	-20.2	56.67	-	-	68.2	-11.53	260	155	V
5	* 5.46	31.63	RMS	34.7	-20.2	46.13	54	-7.87	-	-	260	155	V
6	* 5.452	32.34	RMS	34.7	-20.1	46.94	54	-7.06	-	-	260	155	V
7	5.47	31.5	RMS	34.6	-20.2	45.9	-	-	-	-	260	155	V
8	5.461	32.09	RMS	34.7	-20.2	46.59	-	-	-	-	260	155	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

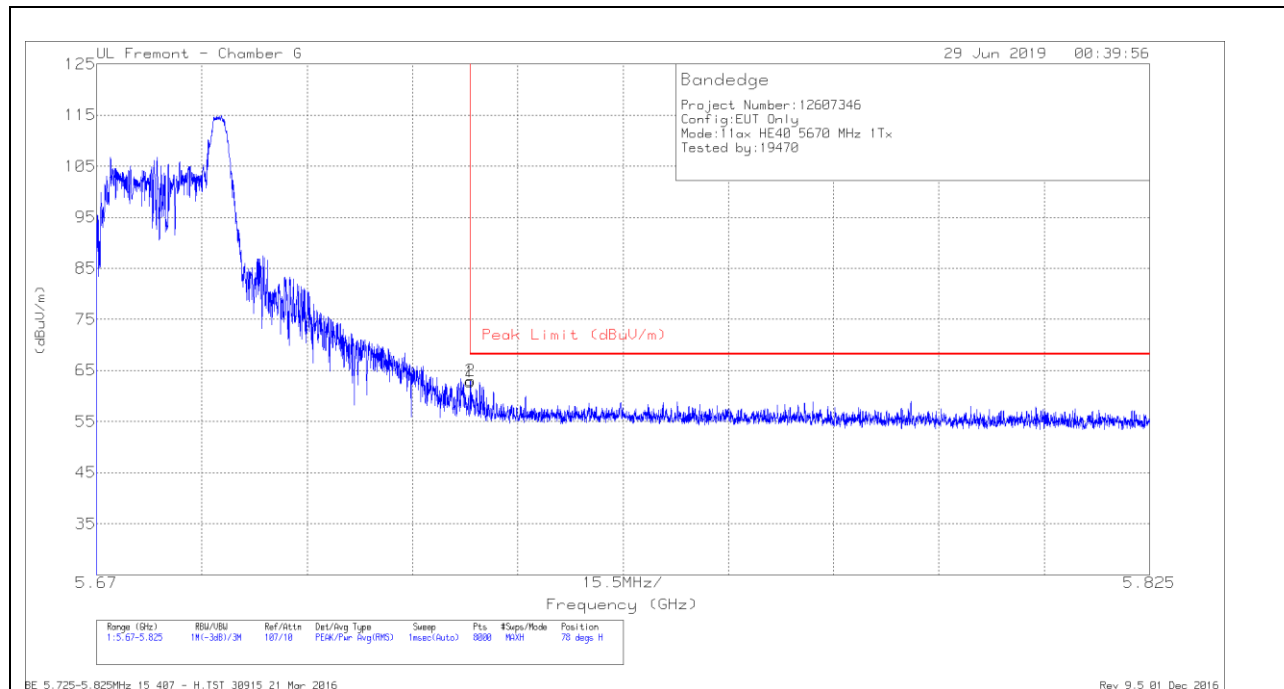1TX Antenna 5 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.65	Pk	35.1	-20	62.75	68.2	-5.45	78	133	H
2	5.725	47.9	Pk	35.1	-20	63	68.2	-5.2	78	133	H


Pk - Peak detector

VERTICAL RESULT

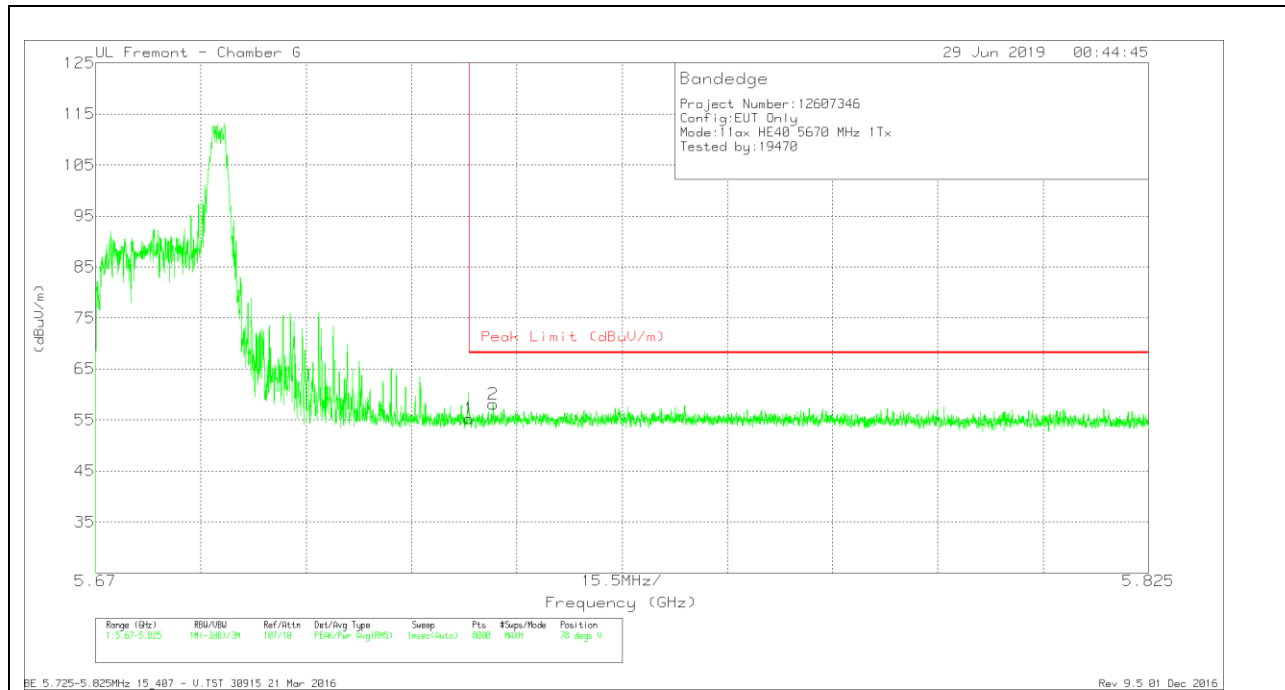

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.15	Pk	35.1	-20	55.25	68.2	-12.95	78	133	V
2	5.729	42.9	Pk	35.1	-19.9	58.1	68.2	-10.1	78	133	V

Pk - Peak detector

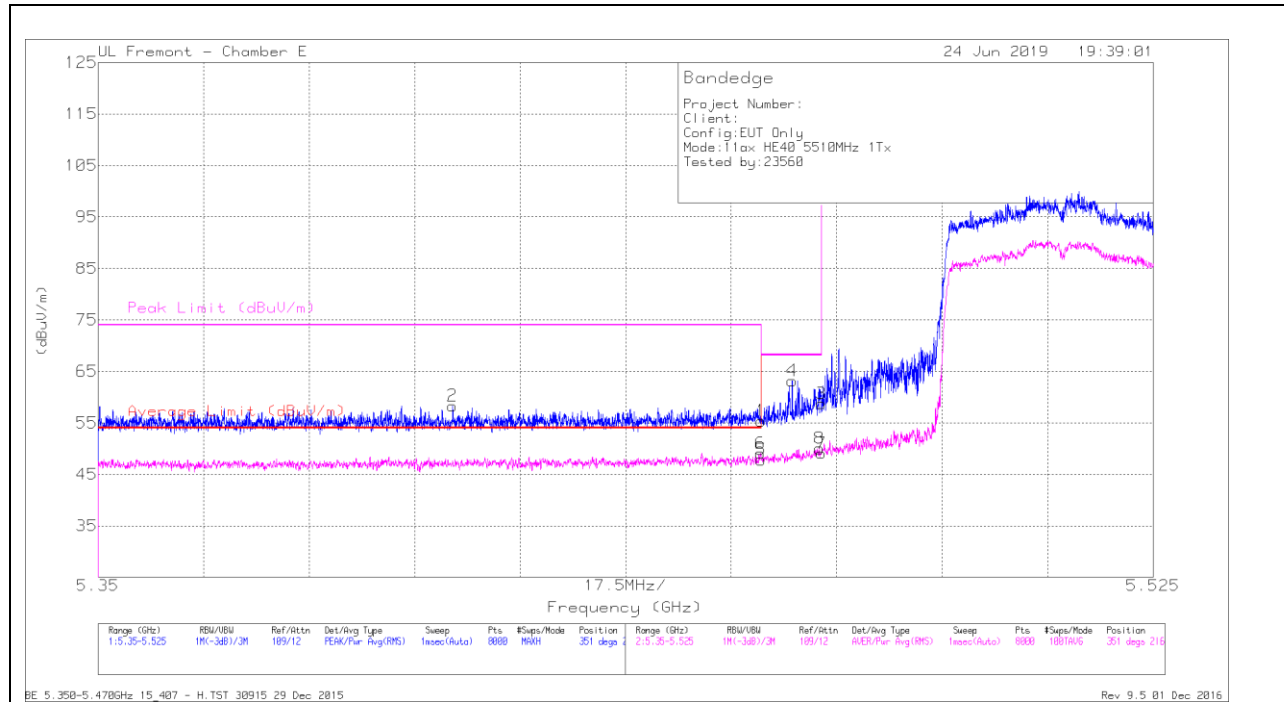1TX Antenna 6 MODE – 484 Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38	Pk	34.6	-17.2	55.4	-	-	74	-18.6	351	216	H
2	* 5.409	41.01	Pk	34.5	-17.2	58.31	-	-	74	-15.69	351	216	H
3	5.47	41.33	Pk	34.6	-17.2	58.73	-	-	68.2	-9.47	351	216	H
4	5.465	45.89	Pk	34.5	-17.2	63.19	-	-	68.2	-5.01	351	216	H
5	* 5.46	30.44	RMS	34.6	-17.2	47.84	54	-6.16	-	-	351	216	H
6	* 5.46	31.71	RMS	34.6	-17.2	49.11	54	-4.89	-	-	351	216	H
7	5.47	31.69	RMS	34.6	-17.2	49.09	-	-	-	-	351	216	H
8	5.47	32.64	RMS	34.6	-17.2	50.04	-	-	-	-	351	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

VERTICAL RESULT

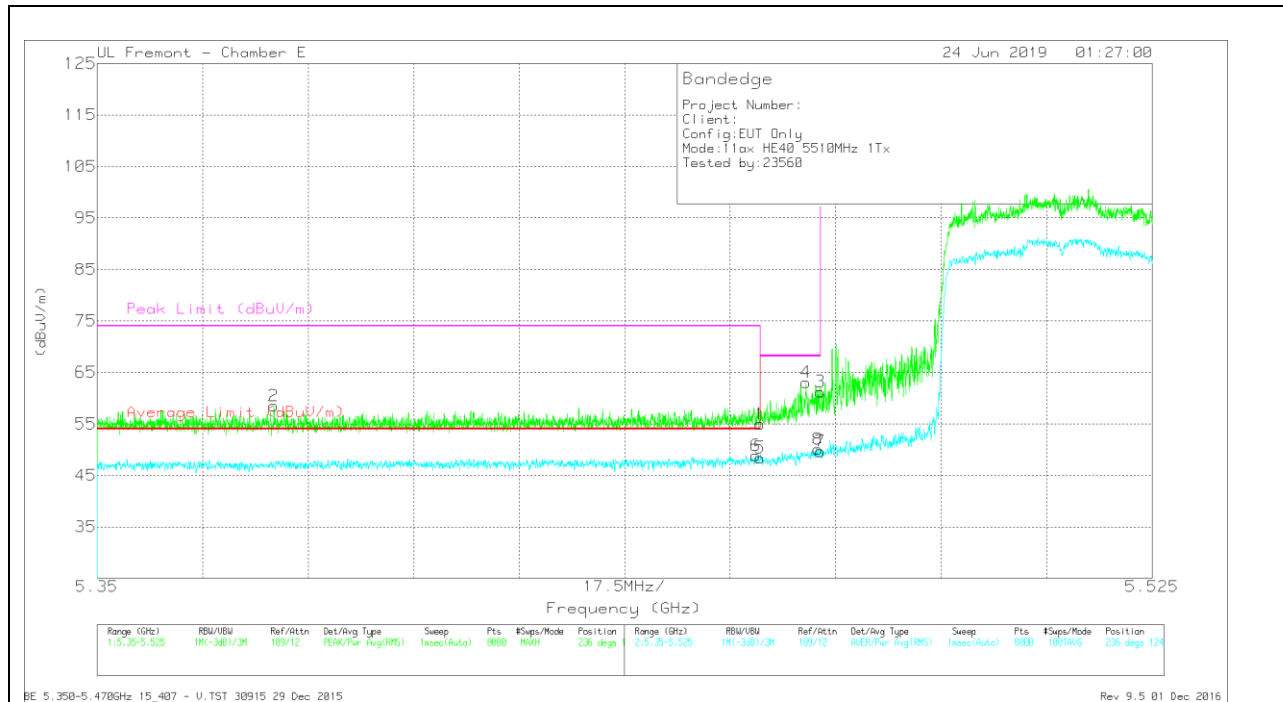

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.58	Pk	34.6	-17.2	54.98	-	-	74	-19.02	236	124	V
2	* 5.379	41.1	Pk	34.5	-17.1	58.5	-	-	74	-15.5	236	124	V
3	5.47	43.83	Pk	34.6	-17.2	61.23	-	-	68.2	-6.97	236	124	V
4	5.468	45.75	Pk	34.5	-17.2	63.05	-	-	68.2	-5.15	236	124	V
5	* 5.46	31.01	RMS	34.6	-17.2	48.41	54	-5.59	-	-	236	124	V
6	* 5.459	31.43	RMS	34.6	-17.2	48.83	54	-5.17	-	-	236	124	V
7	5.47	32.26	RMS	34.6	-17.2	49.66	-	-	-	-	236	124	V
8	5.47	32.67	RMS	34.6	-17.2	50.07	-	-	-	-	236	124	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

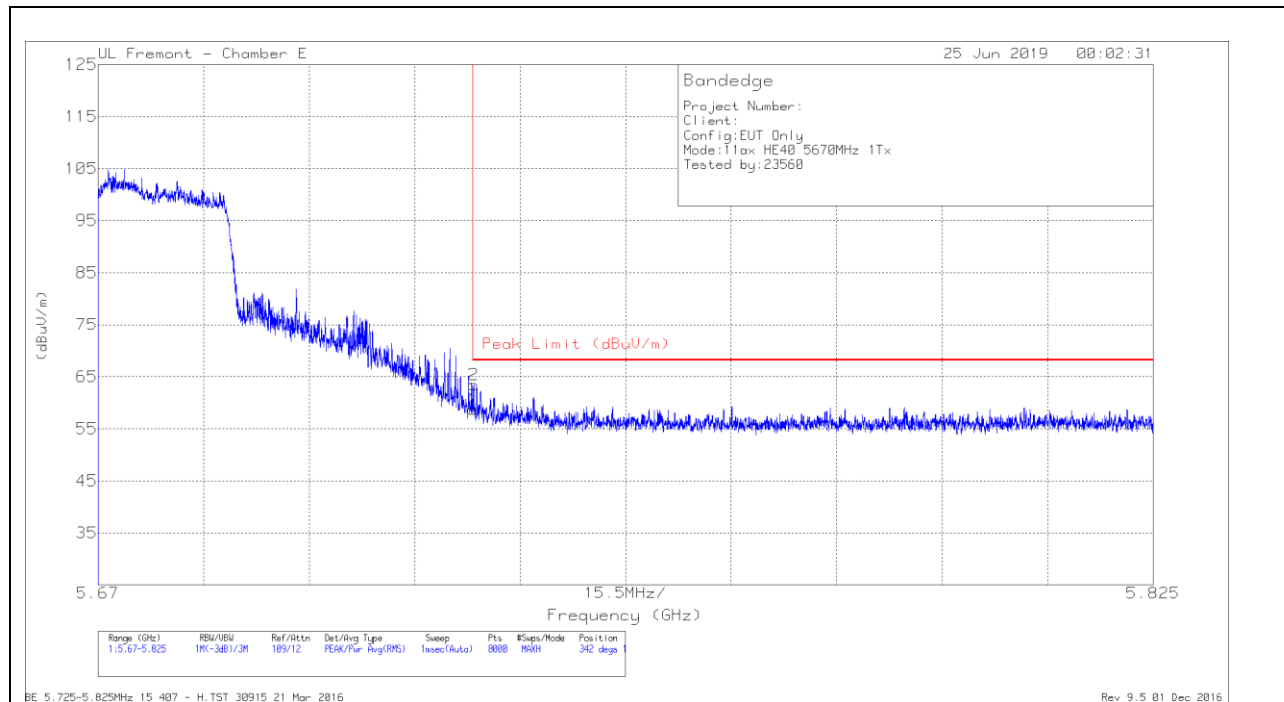1TX Antenna 6 MODE – 484 Tones, RU Index 65**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.24	Pk	34.8	-17.3	58.74	68.2	-9.46	342	136	H
2	5.725	45.97	Pk	34.8	-17.3	63.47	68.2	-4.73	342	136	H


Pk - Peak detector

VERTICAL RESULT

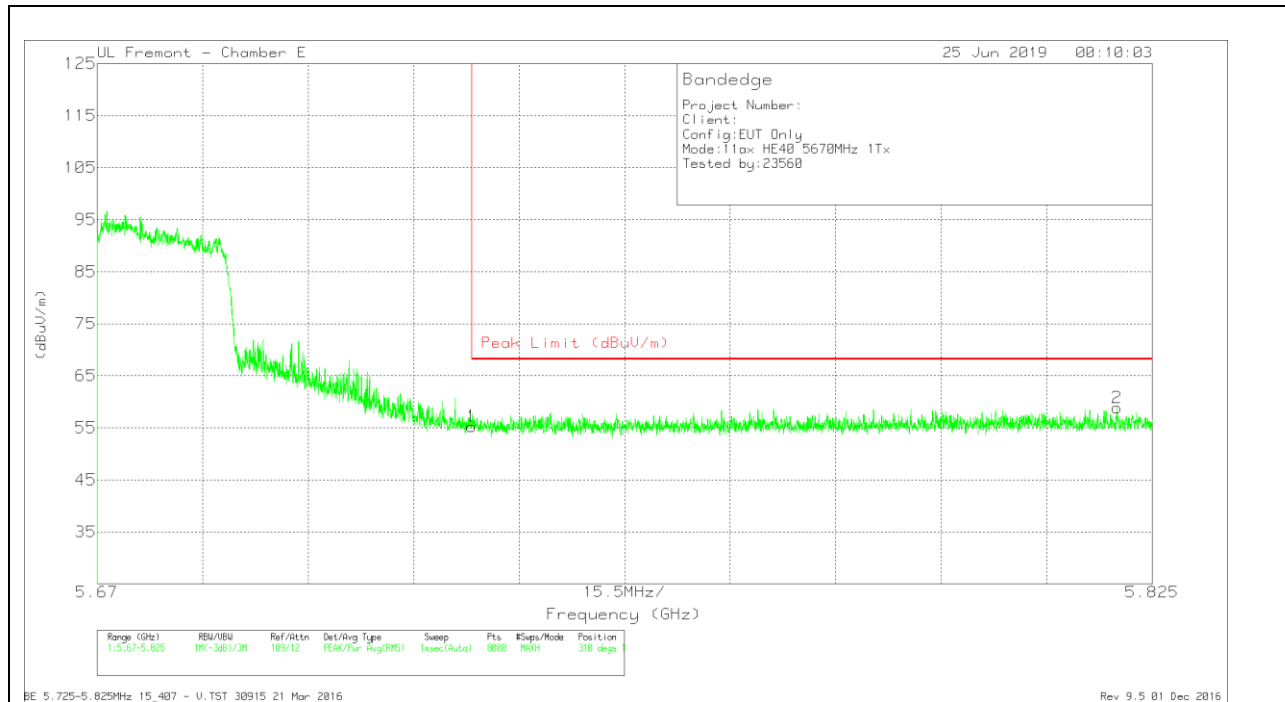

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.76	Pk	34.8	-17.3	55.26	68.2	-12.94	310	127	V
2	5.82	41.14	Pk	35	-17.3	58.84	68.2	-9.36	310	127	V

Pk - Peak detector

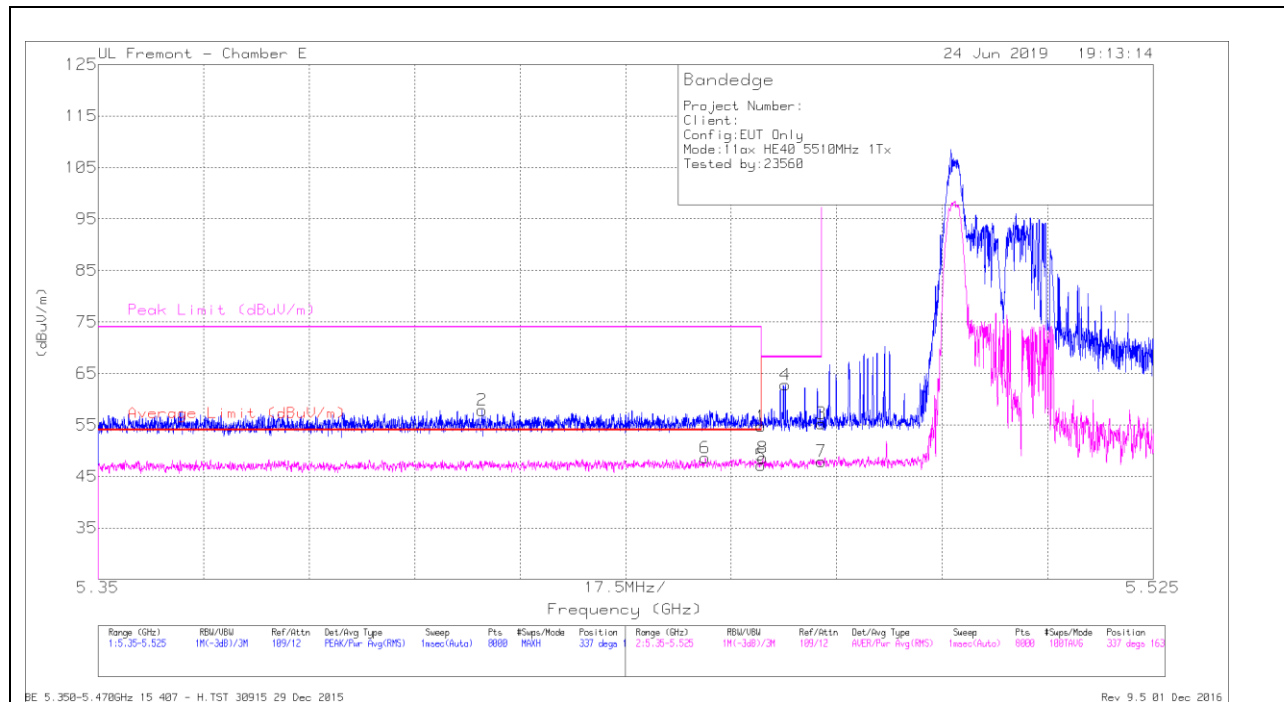1TX Antenna 6 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.29	Pk	34.6	-17.2	54.69	-	-	74	-19.31	337	163	H
2	* 5.414	40.56	Pk	34.5	-17.2	57.86	-	-	74	-16.14	337	163	H
3	5.47	37.86	Pk	34.6	-17.2	55.26	-	-	68.2	-12.94	337	163	H
4	5.464	45.47	Pk	34.5	-17.2	62.77	-	-	68.2	-5.43	337	163	H
5	* 5.46	29.74	RMS	34.6	-17.2	47.14	54	-6.86	-	-	337	163	H
6	* 5.451	31.29	RMS	34.5	-17.2	48.59	54	-5.41	-	-	337	163	H
7	5.47	30.5	RMS	34.6	-17.2	47.9	-	-	-	-	337	163	H
8	5.46	31.31	RMS	34.5	-17.2	48.61	-	-	-	-	337	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

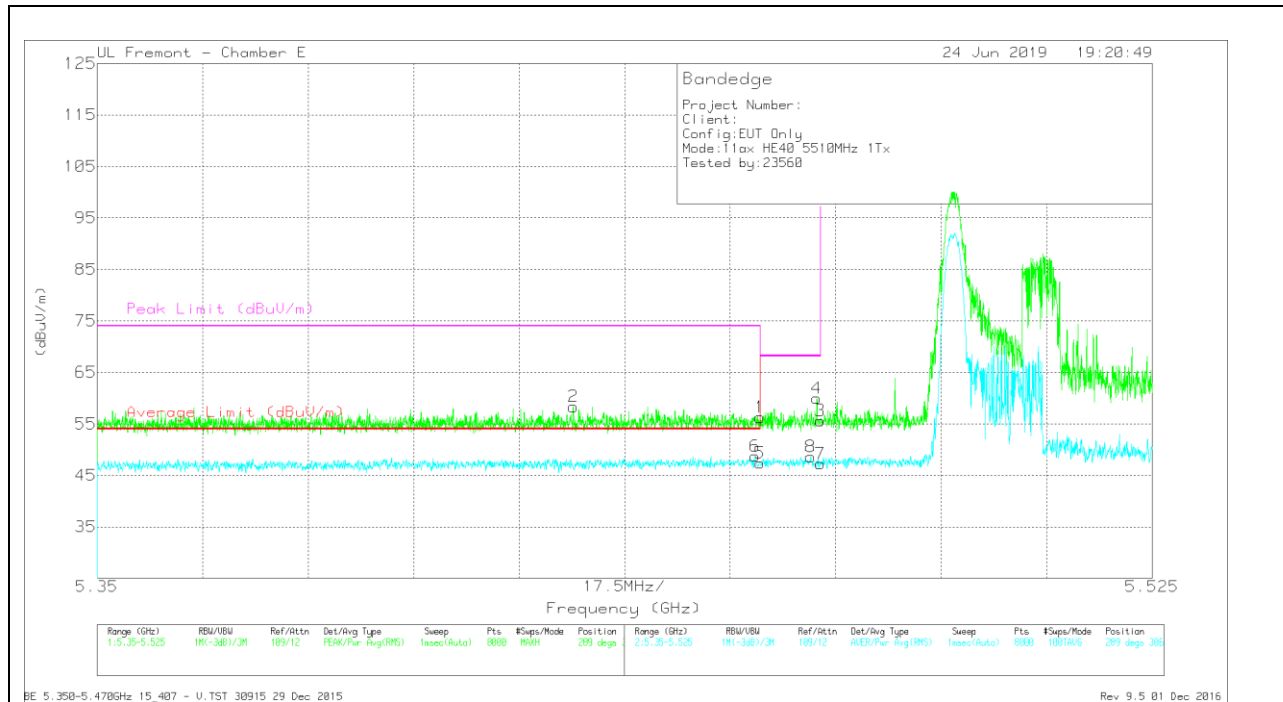


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.87	Pk	34.6	-17.2	56.27	-	-	74	-17.73	289	306	V
2	* 5.429	41.15	Pk	34.5	-17.3	58.35	-	-	74	-15.65	289	306	V
3	5.47	38.21	Pk	34.6	-17.2	55.61	-	-	68.2	-12.59	289	306	V
4	5.469	42.57	Pk	34.6	-17.2	59.97	-	-	68.2	-8.23	289	306	V
5	* 5.46	29.99	RMS	34.6	-17.2	47.39	54	-6.61	-	-	289	306	V
6	* 5.459	31.32	RMS	34.6	-17.2	48.72	54	-5.28	-	-	289	306	V
7	5.47	29.86	RMS	34.6	-17.2	47.26	-	-	-	-	289	306	V
8	5.468	31.23	RMS	34.6	-17.2	48.63	-	-	-	-	289	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

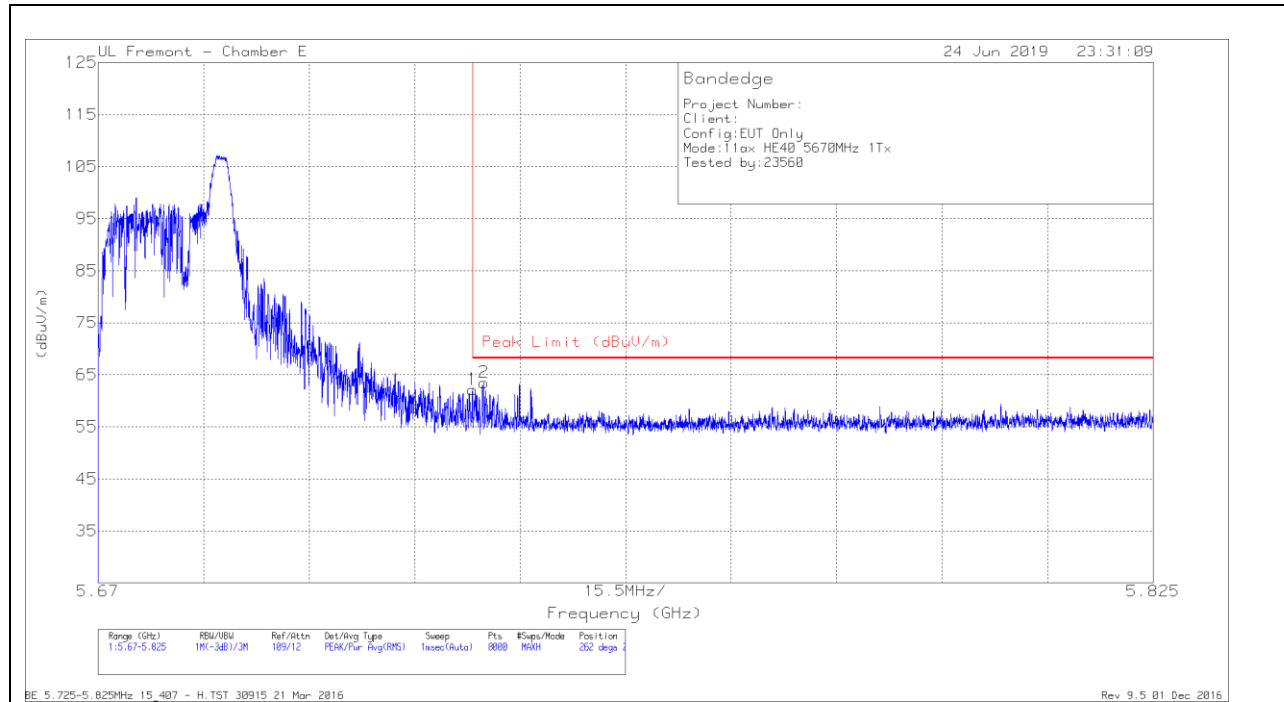1TX Antenna 6 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.68	Pk	34.8	-17.3	62.18	68.2	-6.02	262	261	H
2	5.727	46.22	Pk	34.7	-17.4	63.52	68.2	-4.68	262	261	H


Pk - Peak detector

VERTICAL RESULT

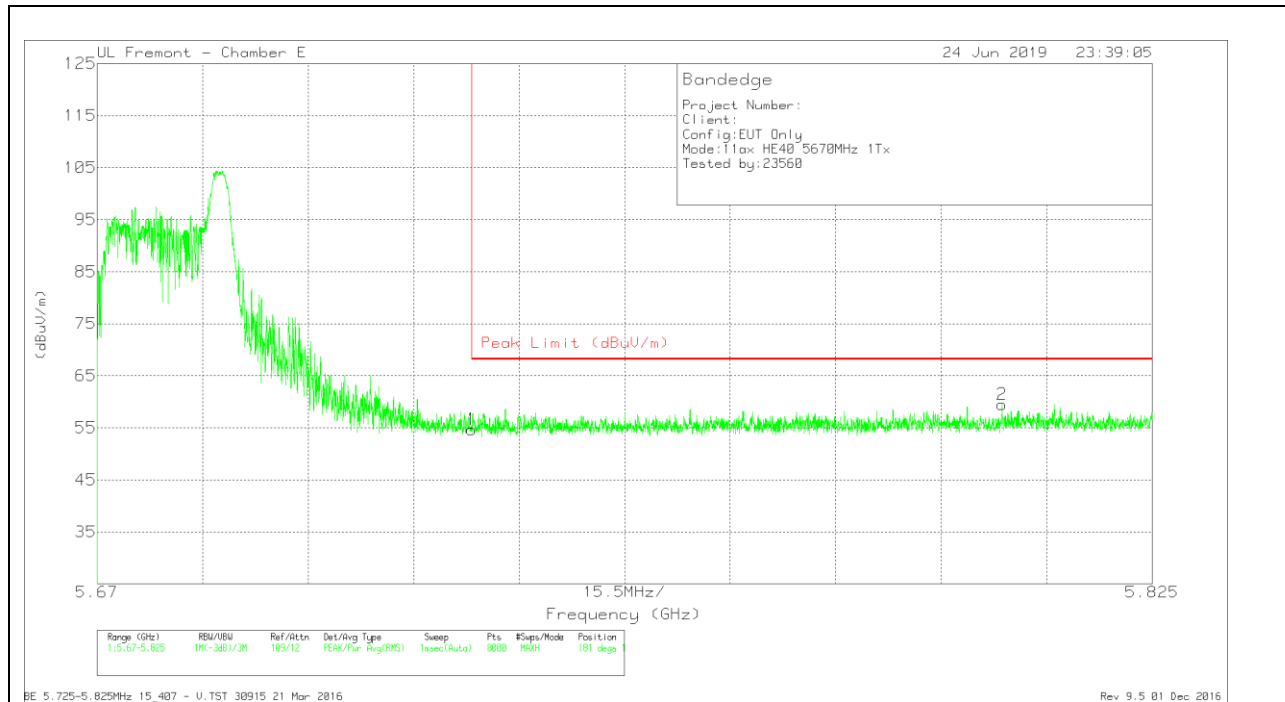

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.17	Pk	34.8	-17.3	54.67	68.2	-13.53	181	144	V
2	5.803	41.89	Pk	34.9	-17.3	59.49	68.2	-8.71	181	144	V

Pk - Peak detector

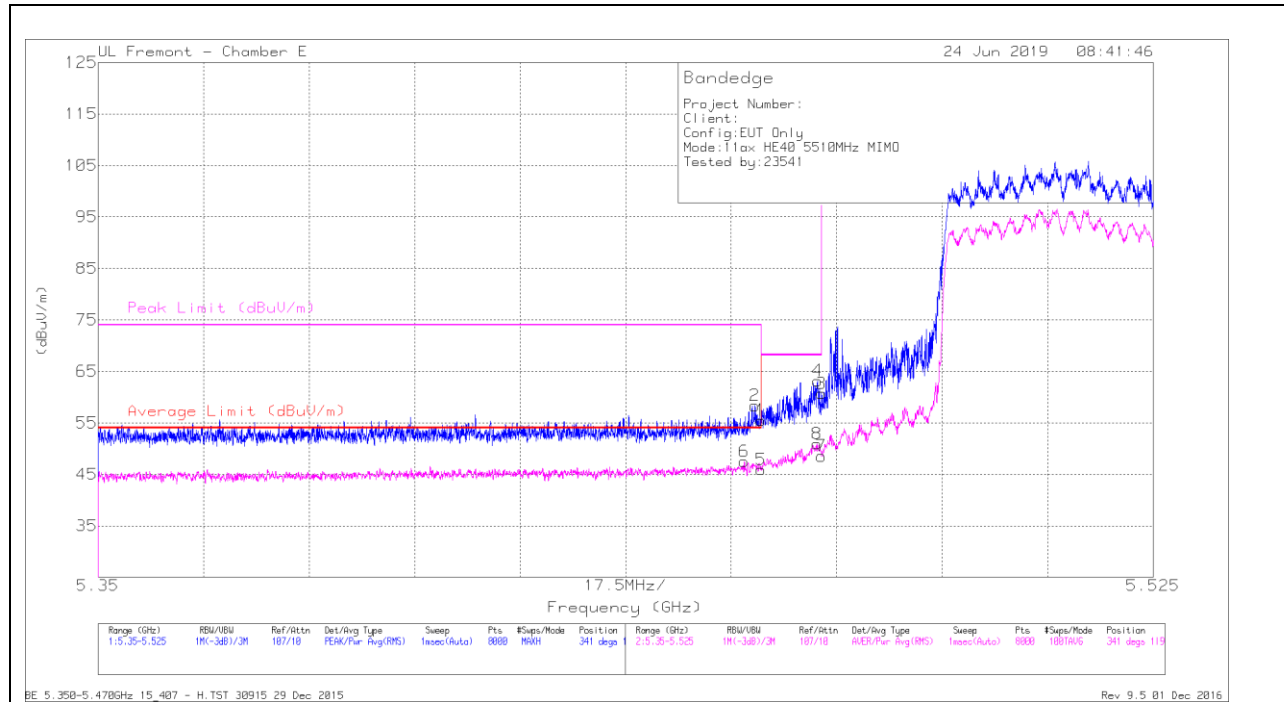2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.2	Pk	34.6	-21.3	55.5	-	-	74	-18.5	341	119	H
2	* 5.459	45.05	Pk	34.6	-21.3	58.35	-	-	74	-15.65	341	119	H
3	5.47	47.42	Pk	34.6	-21.3	60.72	-	-	68.2	-7.48	341	119	H
4	5.469	49.87	Pk	34.6	-21.3	63.17	-	-	68.2	-5.03	341	119	H
5	* 5.46	32.63	RMS	34.6	-21.3	45.93	54	-8.07	-	-	341	119	H
6	* 5.457	34.19	RMS	34.6	-21.3	47.49	54	-6.51	-	-	341	119	H
7	5.47	35.26	RMS	34.6	-21.3	48.56	-	-	-	-	341	119	H
8	5.469	37.63	RMS	34.6	-21.3	50.93	-	-	-	-	341	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

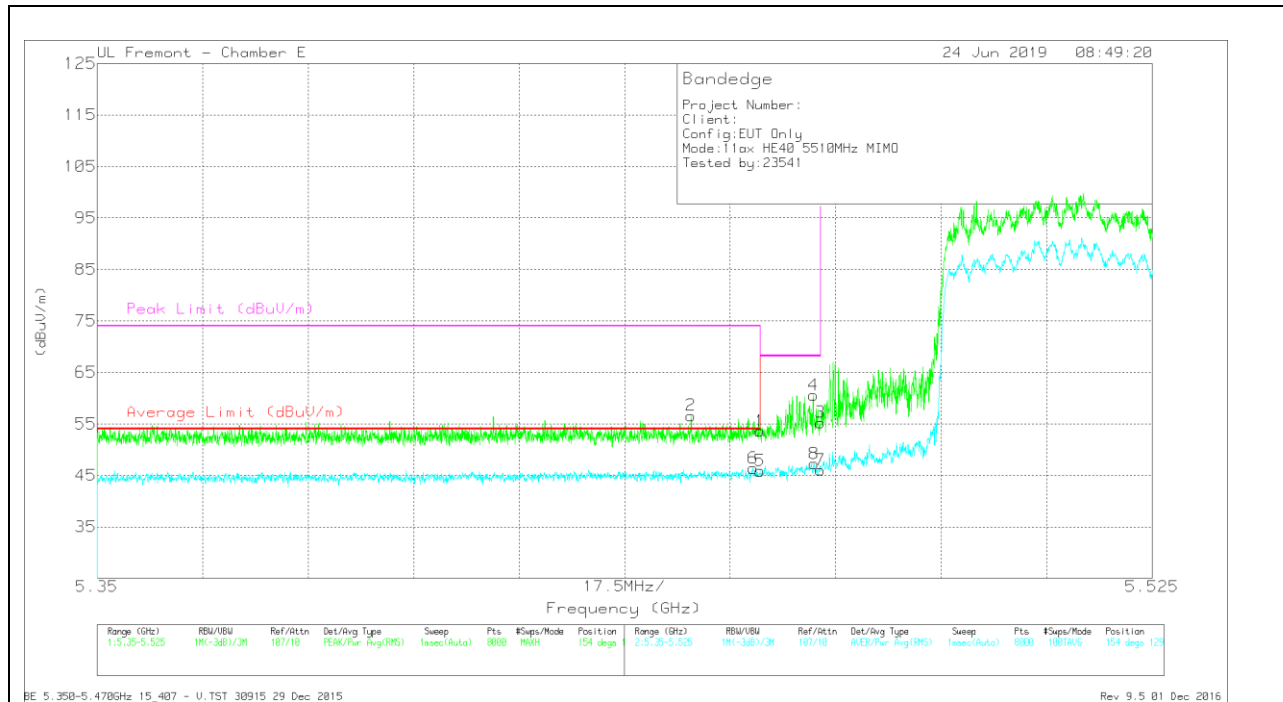


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.32	Pk	34.6	-21.3	53.62	-	-	74	-20.38	154	129	V
2	* 5.449	43.51	Pk	34.5	-21.4	56.61	-	-	74	-17.39	154	129	V
3	5.47	41.97	Pk	34.6	-21.3	55.27	-	-	68.2	-12.93	154	129	V
4	5.469	47.28	Pk	34.6	-21.3	60.58	-	-	68.2	-7.62	154	129	V
5	* 5.46	32.59	RMS	34.6	-21.3	45.89	54	-8.11	-	-	154	129	V
6	* 5.459	33.08	RMS	34.6	-21.3	46.38	54	-7.62	-	-	154	129	V
7	5.47	32.74	RMS	34.6	-21.3	46.04	-	-	-	-	154	129	V
8	5.469	33.96	RMS	34.6	-21.3	47.26	-	-	-	-	154	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

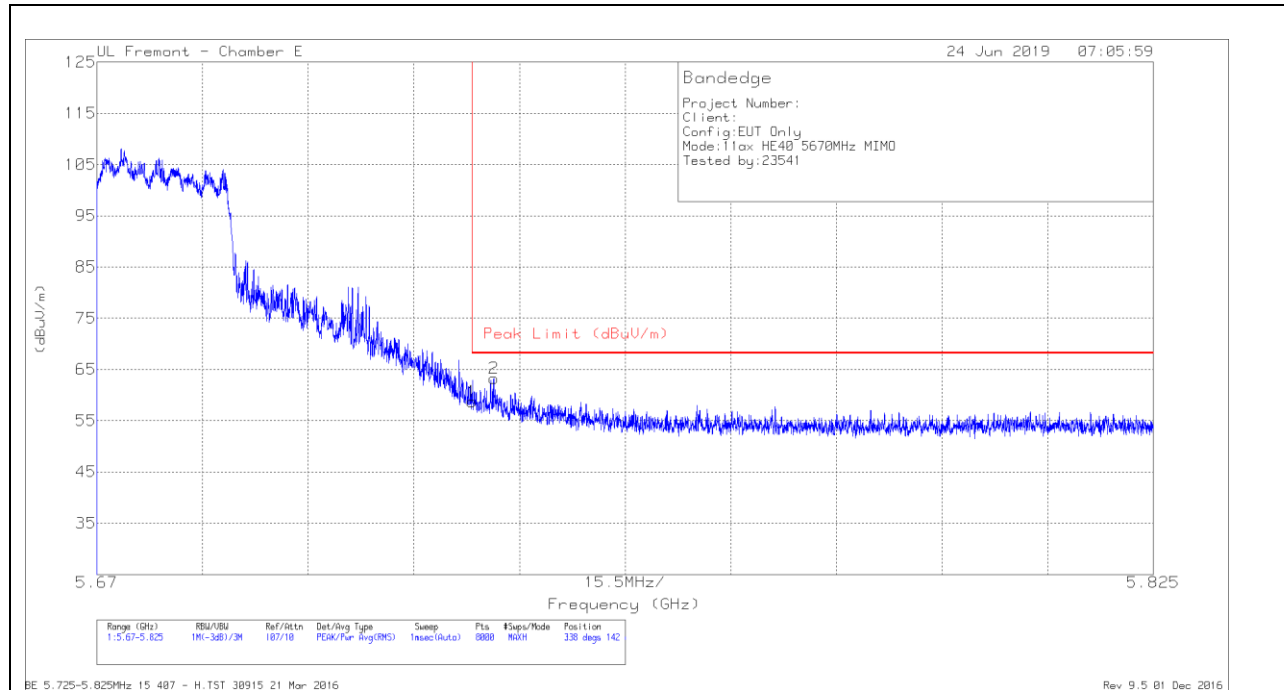2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.79	Pk	34.8	-20.9	58.69	68.2	-9.51	338	142	H
2	5.728	49.39	Pk	34.8	-20.9	63.29	68.2	-4.91	338	142	H



Pk - Peak detector

VERTICAL RESULT

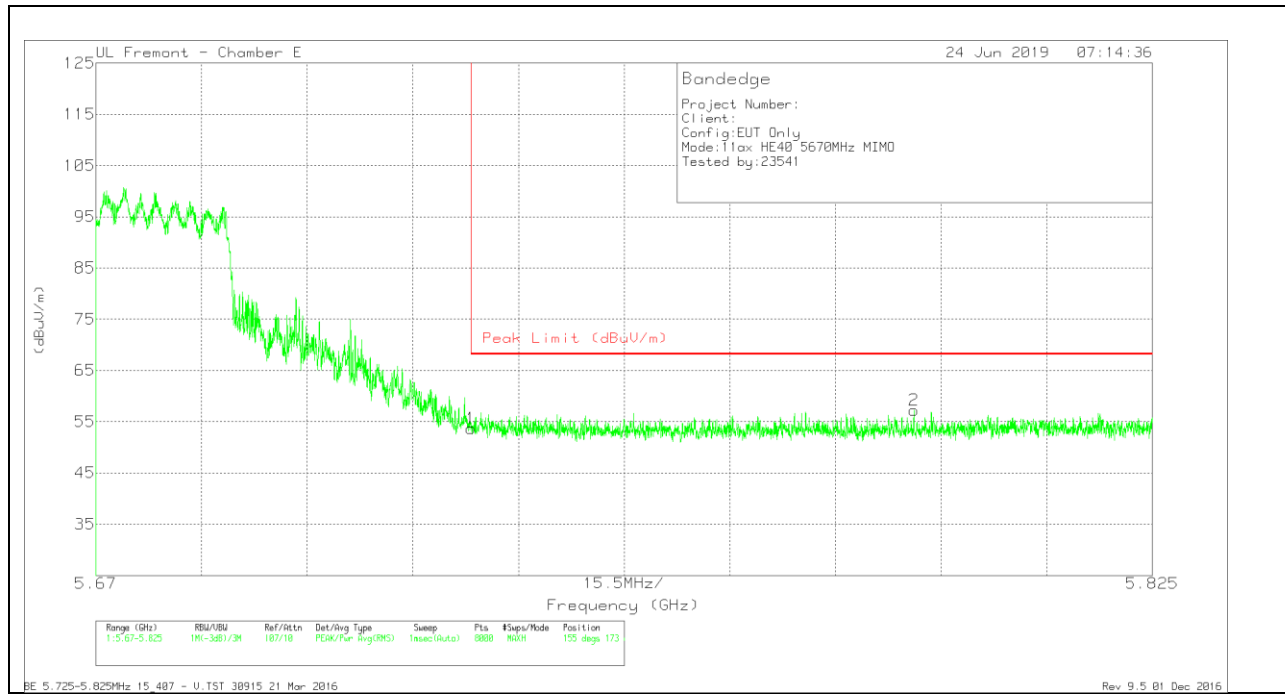

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.78	Pk	34.8	-20.9	53.68	68.2	-14.52	155	173	V
2	5.79	42.87	Pk	35	-20.6	57.27	68.2	-10.93	155	173	V

Pk - Peak detector

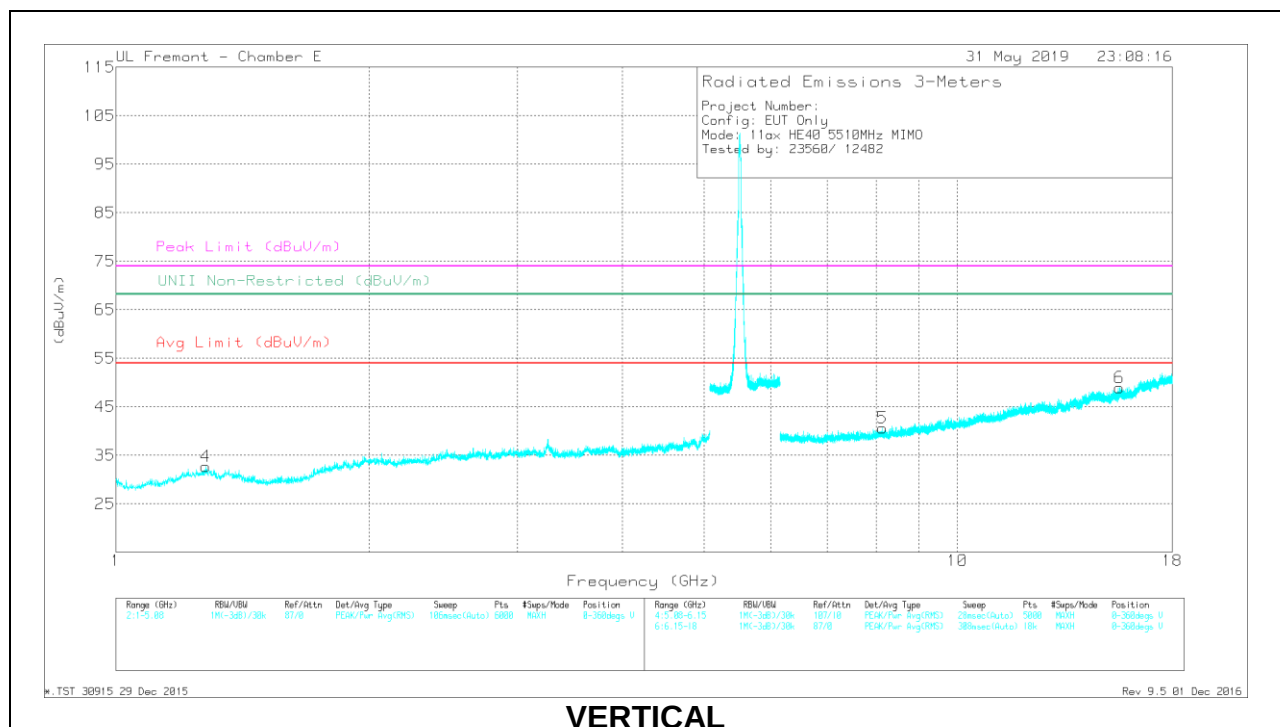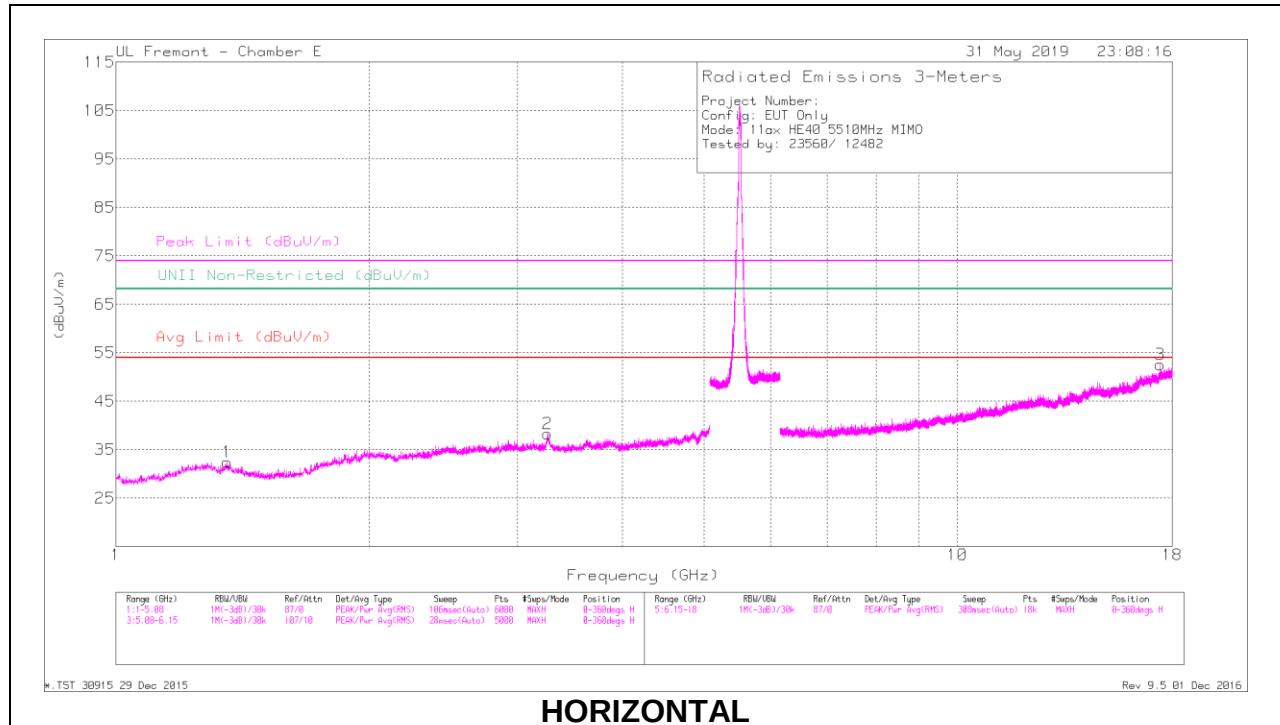HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Filtz/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 1.356	45.23	PK-U	29.7	-35.6	39.33	-	-	74	-34.67	-	-	325	123	H
	* 1.357	33.6	ADR	29.7	-35.6	27.7	54	-26.3	-	-	-	-	325	123	H
2	3.259	45.12	PK-U	35	-34.5	45.62	-	-	-	-	68.2	-22.58	152	190	H
3	17.429	36.36	PK-U	41.5	-18.8	59.06	-	-	-	-	68.2	-9.14	153	138	H
4	* 1.28	44.95	PK-U	30.1	-35.5	39.55	-	-	74	-34.45	-	-	12	114	V
	* 1.281	33.47	ADR	30.1	-35.5	28.07	54	-25.93	-	-	-	-	12	114	V
5	* 8.147	39.02	PK-U	35.9	-27.4	47.52	-	-	74	-26.48	-	-	278	350	V
	* 8.148	27.63	ADR	35.9	-27.4	36.13	54	-17.87	-	-	-	-	278	350	V
6	* 15.572	35.74	PK-U	40.3	-20.5	55.54	-	-	74	-18.46	-	-	142	160	V
	* 15.573	24.56	ADR	40.3	-20.6	44.26	54	-9.74	-	-	-	-	142	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

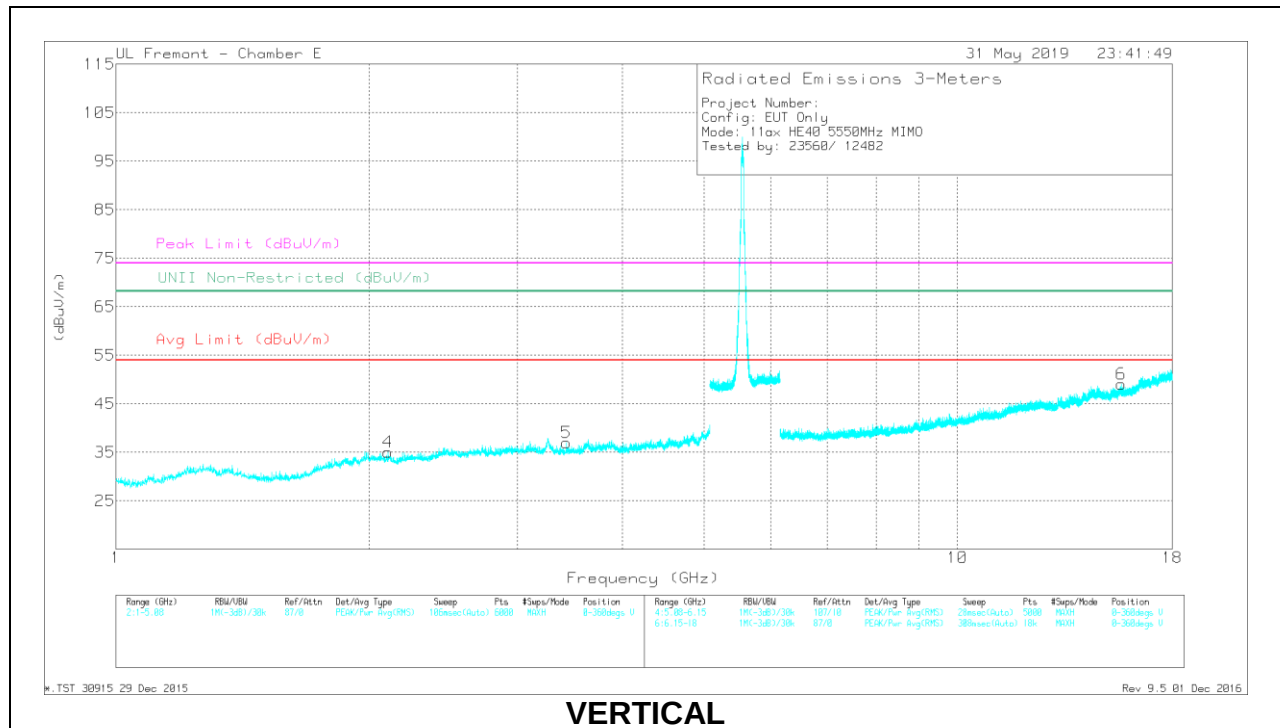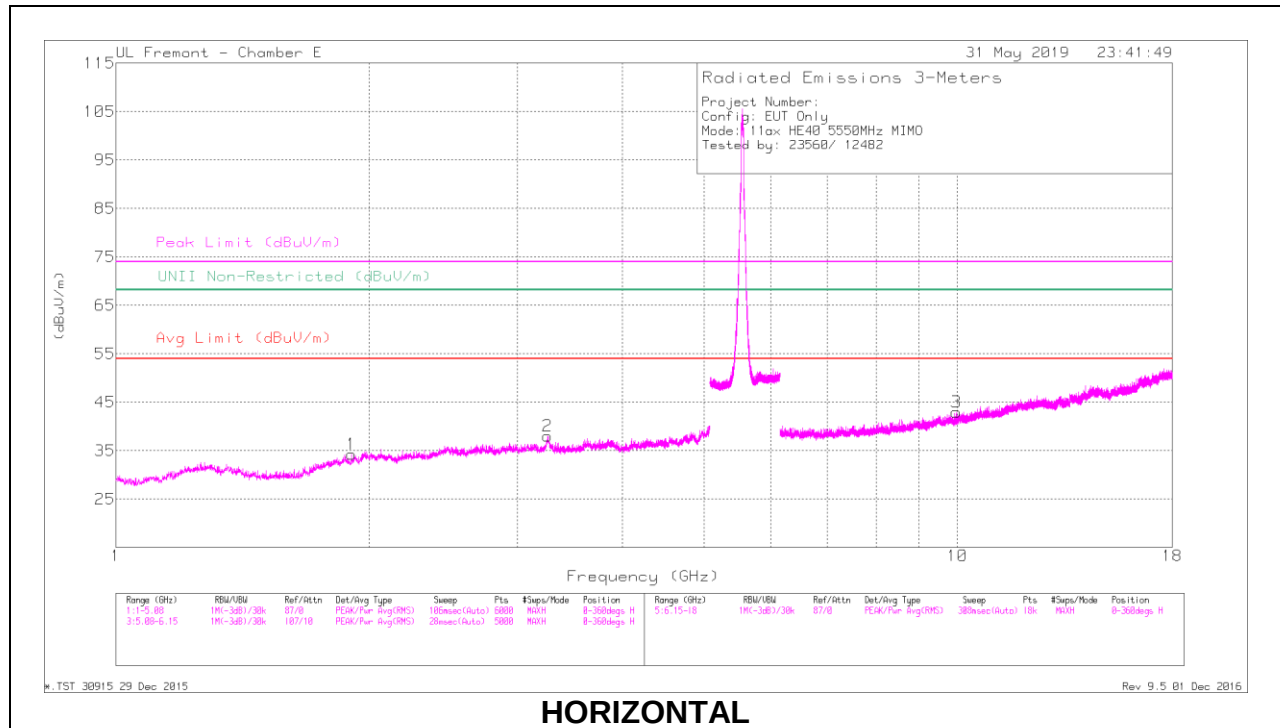

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1.906	46	PK-U	31.4	-35.3	42.1	-	-	-	-	68.2	-26.1	90	172	H
2	* 3.26	44.75	PK-U	35.1	-34.5	45.35	-	-	74	-28.65	-	-	137	111	H
	* 3.26	33.21	ADR	35.1	-34.5	33.81	54	-20.19	-	-	-	-	137	111	H
3	9.968	37.81	PK-U	37	-25.6	49.21	-	-	-	-	68.2	-18.99	161	255	H
4	2.105	44.9	PK-U	31.9	-35.3	41.5	-	-	-	-	68.2	-26.7	63	181	V
5	3.431	44.5	PK-U	32.9	-34.2	43.2	-	-	-	-	68.2	-25	97	217	V
6	* 15.668	35.62	PK-U	40.3	-20.8	55.12	-	-	74	-18.88	-	-	141	206	V
	* 15.667	24.68	ADR	40.3	-20.8	44.18	54	-9.82	-	-	-	-	141	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

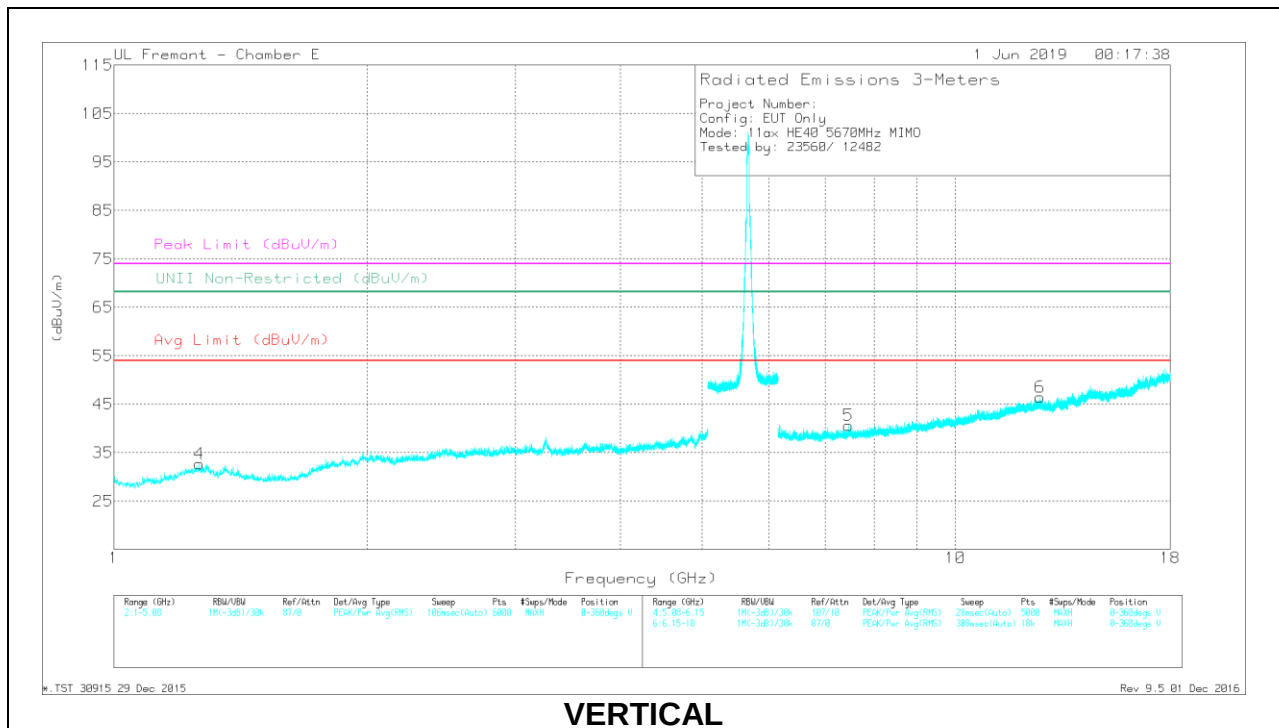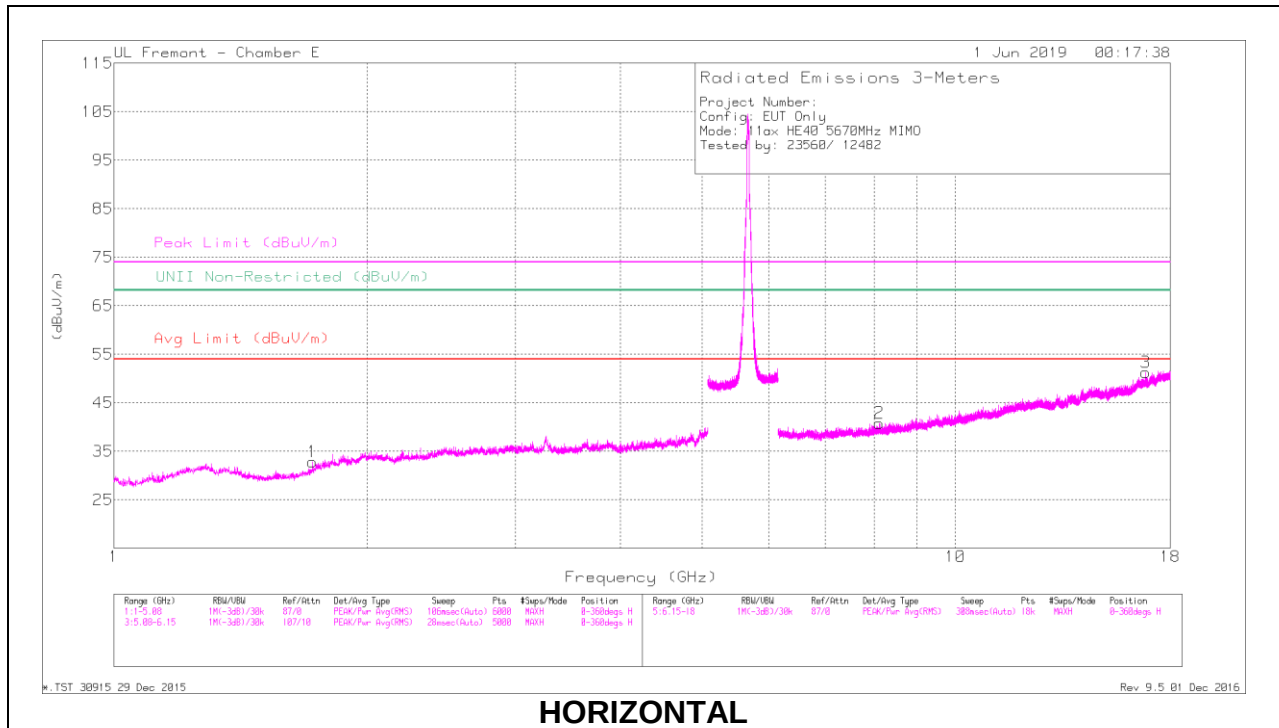

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.721	45.75	PK-U	29.5	-35.5	39.75	-	-	74	-34.25	-	-	126	232	H
	* 1.72	33.86	ADR	29.5	-35.5	27.86	54	-26.14	-	-	-	-	126	232	H
2	* 8.127	38.95	PK-U	35.8	-27.6	47.15	-	-	74	-26.85	-	-	280	225	H
	* 8.127	27.69	ADR	35.8	-27.6	35.89	54	-18.11	-	-	-	-	280	225	H
3	16.838	34.73	PK-U	41.4	-19.1	57.03	-	-	-	-	68.2	-11.17	148	151	H
4	* 1.263	45.3	PK-U	30	-35.4	39.9	-	-	74	-34.1	-	-	322	150	V
	* 1.262	33.35	ADR	30	-35.4	27.95	54	-26.05	-	-	-	-	322	150	V
5	* 7.455	39.18	PK-U	35.8	-28.1	46.88	-	-	74	-27.12	-	-	11	101	V
	* 7.455	27.61	ADR	35.8	-28.1	35.31	54	-18.69	-	-	-	-	11	101	V
6	* 12.604	35.27	PK-U	39.1	-21.9	52.47	-	-	74	-21.53	-	-	134	345	V
	* 12.603	24.29	ADR	39.1	-21.8	41.59	54	-12.41	-	-	-	-	134	345	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

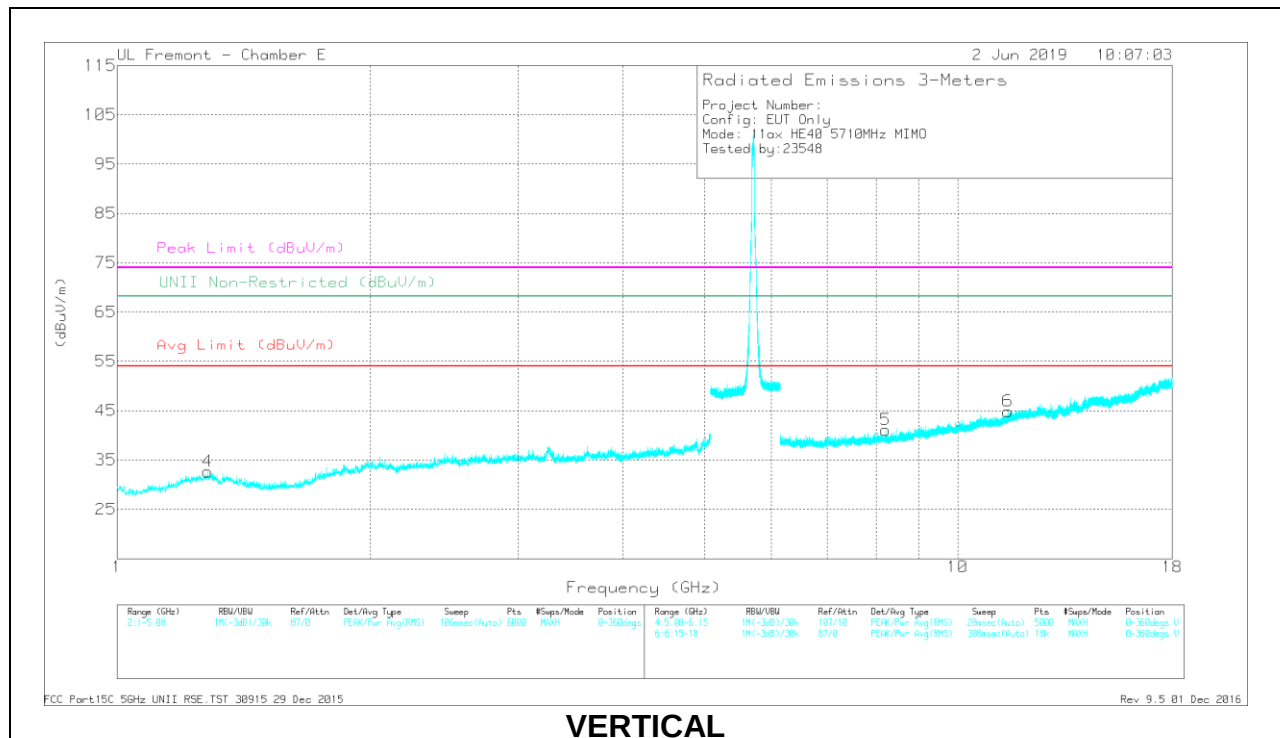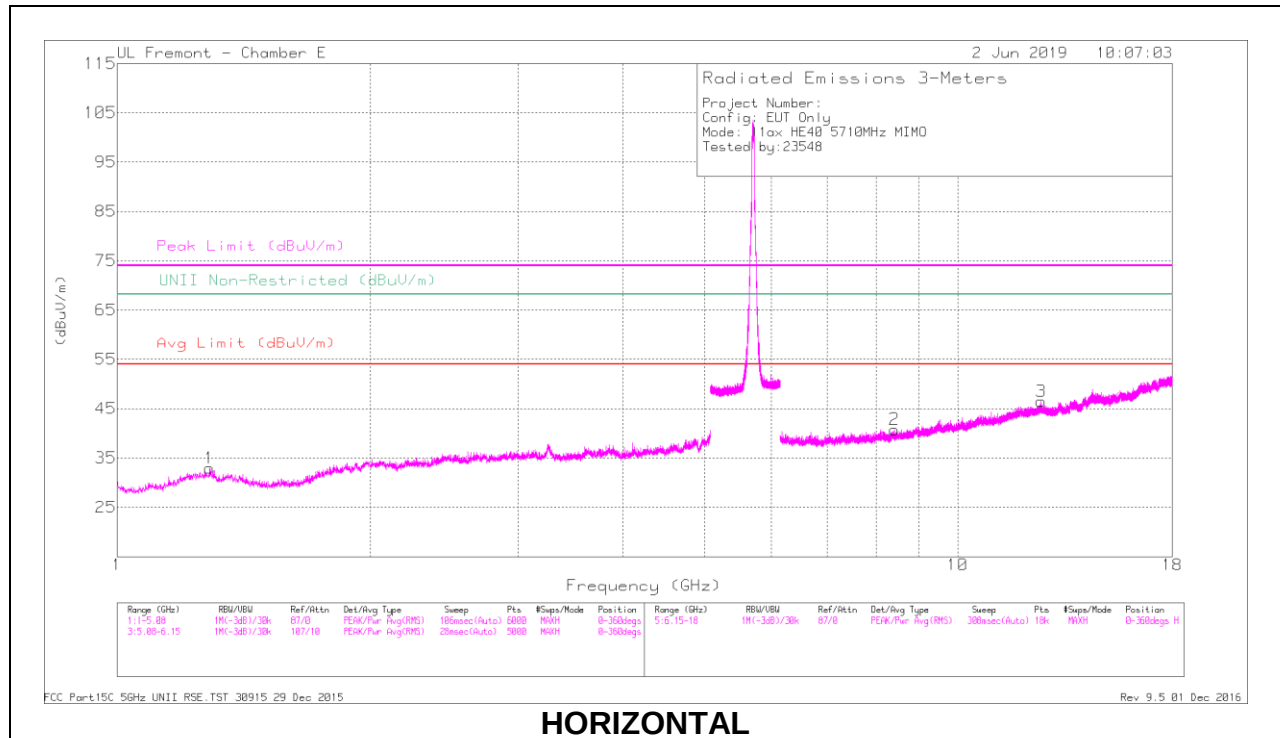


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.291	45.14	PK-U	30	-35.4	39.74	-	-	74	-34.26	-	-	242	193	H
	* 1.289	33.13	ADR	30	-35.5	27.63	54	-26.37	-	-	-	-	242	193	H
2	* 8.408	38.03	PK-U	35.8	-26.8	47.03	-	-	74	-26.97	-	-	40	282	H
	* 8.409	26.54	ADR	35.8	-26.8	35.54	54	-18.46	-	-	-	-	40	282	H
3	* 12.57	36.11	PK-U	39.1	-22	53.21	-	-	74	-20.79	-	-	133	204	H
	* 12.569	23.75	ADR	39.1	-22.1	40.75	54	-13.25	-	-	-	-	133	204	H
4	* 1.283	45.04	PK-U	30	-35.4	39.64	-	-	74	-34.36	-	-	80	300	V
	* 1.281	32.96	ADR	30.1	-35.4	27.66	54	-26.34	-	-	-	-	80	300	V
5	* 8.207	38.6	PK-U	35.8	-27.1	47.3	-	-	74	-26.7	-	-	56	160	V
	* 8.21	26.45	ADR	35.8	-27.1	35.15	54	-18.85	-	-	-	-	56	160	V
6	* 11.477	36.24	PK-U	38.4	-23.5	51.14	-	-	74	-22.86	-	-	218	337	V
	* 11.474	24.61	ADR	38.4	-23.5	39.51	54	-14.49	-	-	-	-	218	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

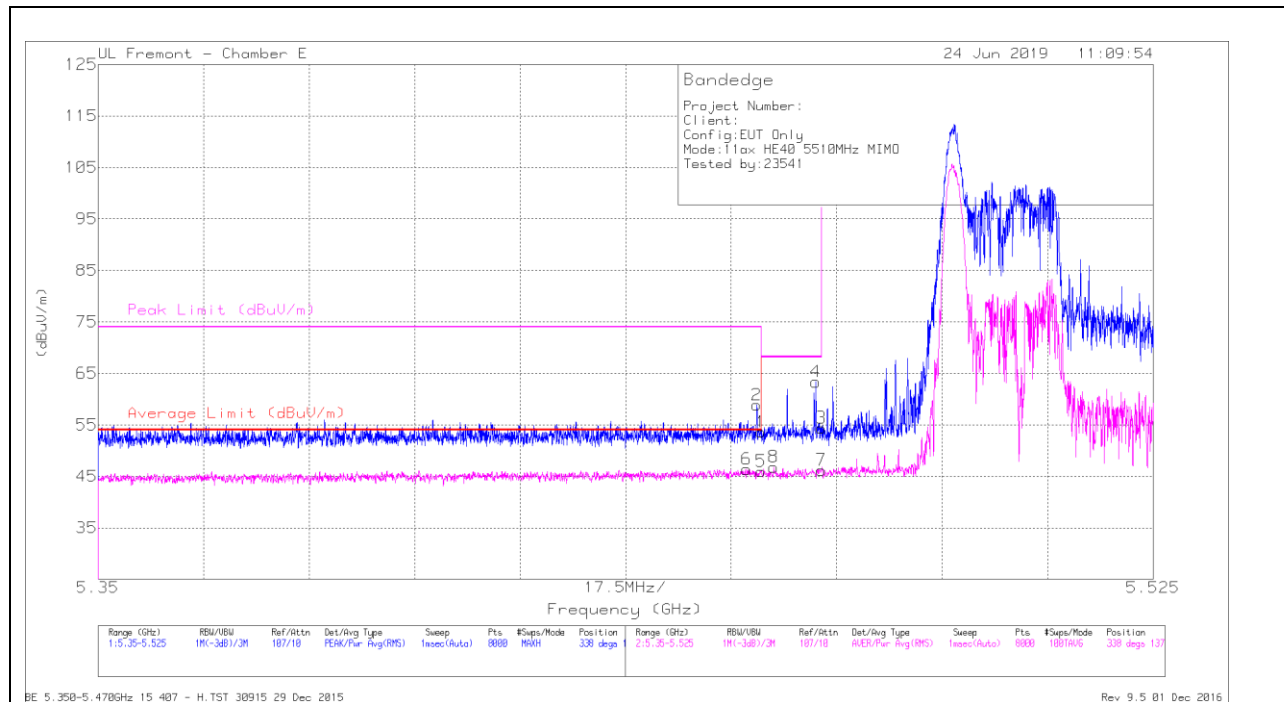2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.3	Pk	34.6	-21.3	53.6	-	-	74	-20.4	338	137	H
2	* 5.459	45.59	Pk	34.6	-21.3	58.89	-	-	74	-15.11	338	137	H
3	5.47	41.08	Pk	34.6	-21.3	54.38	-	-	68.2	-13.82	338	137	H
4	5.469	50.05	Pk	34.6	-21.3	63.35	-	-	68.2	-4.85	338	137	H
5	* 5.46	32.67	RMS	34.6	-21.3	45.97	54	-8.03	-	-	338	137	H
6	* 5.458	33.07	RMS	34.6	-21.3	46.37	54	-7.63	-	-	338	137	H
7	5.47	32.9	RMS	34.6	-21.3	46.2	-	-	-	-	338	137	H
8	5.462	33.62	RMS	34.5	-21.3	46.82	-	-	-	-	338	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

VERTICAL RESULT

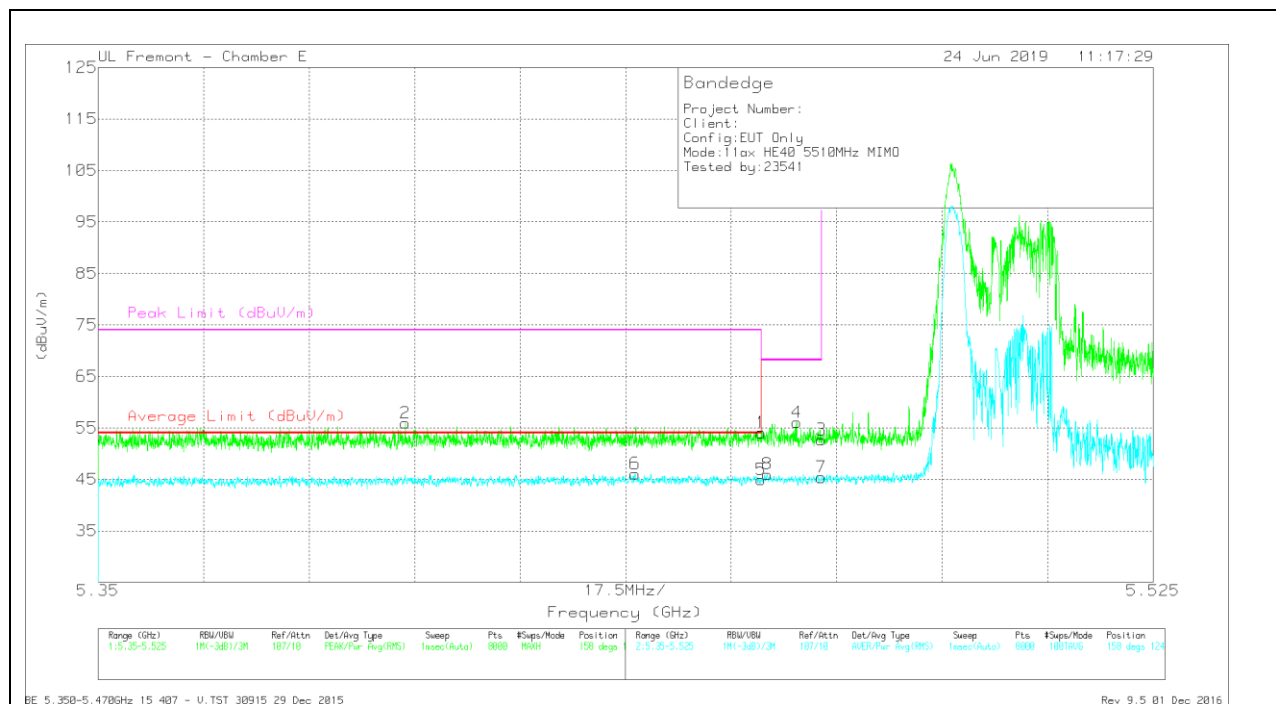

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.77	Pk	34.6	-21.3	54.07	-	-	74	-19.93	158	124	V
2	* 5.401	42.82	Pk	34.5	-21.4	55.92	-	-	74	-18.08	158	124	V
3	5.47	39.37	Pk	34.6	-21.3	52.67	-	-	68.2	-15.53	158	124	V
4	5.466	42.84	Pk	34.5	-21.3	56.04	-	-	68.2	-12.16	158	124	V
5	* 5.46	31.63	RMS	34.6	-21.3	44.93	54	-9.07	-	-	158	124	V
6	* 5.439	32.99	RMS	34.5	-21.4	46.09	54	-7.91	-	-	158	124	V
7	5.47	32.1	RMS	34.6	-21.3	45.4	-	-	-	-	158	124	V
8	5.461	32.79	RMS	34.5	-21.3	45.99	-	-	-	-	158	124	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

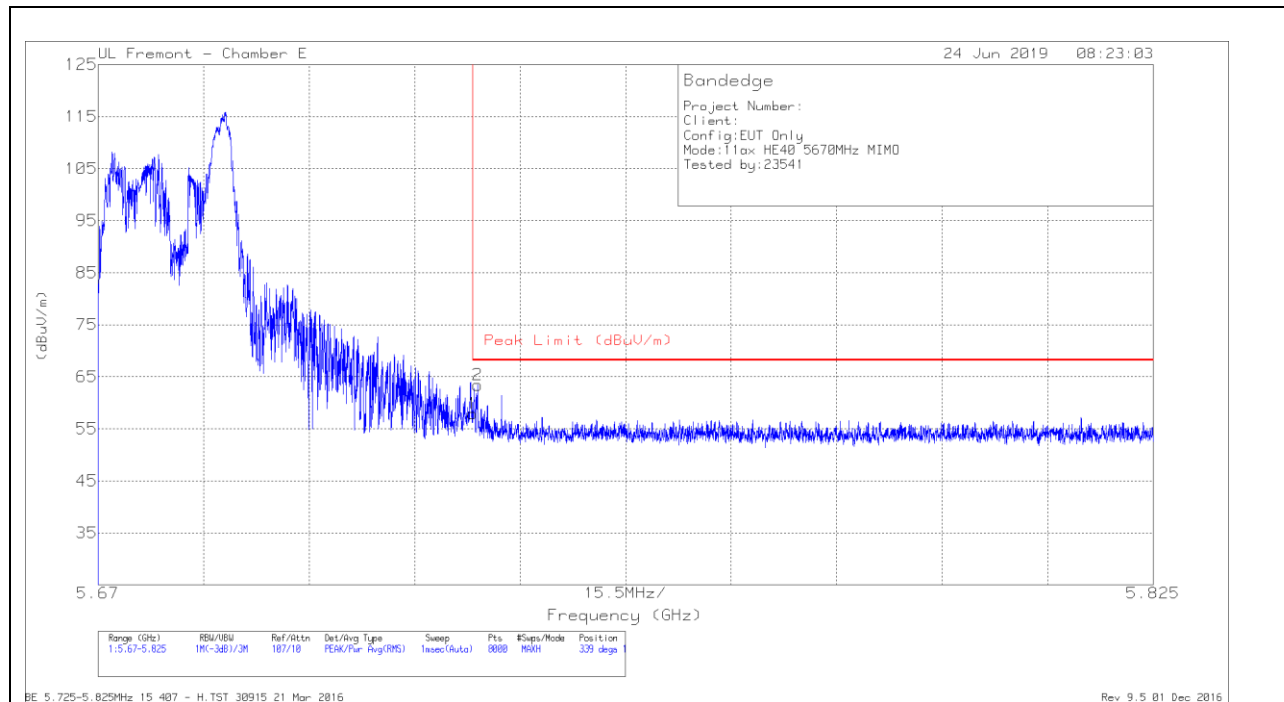2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44	Pk	34.8	-20.9	57.9	68.2	-10.3	339	142	H
2	5.726	49.62	Pk	34.7	-20.9	63.42	68.2	-4.78	339	142	H



Pk - Peak detector

VERTICAL RESULT

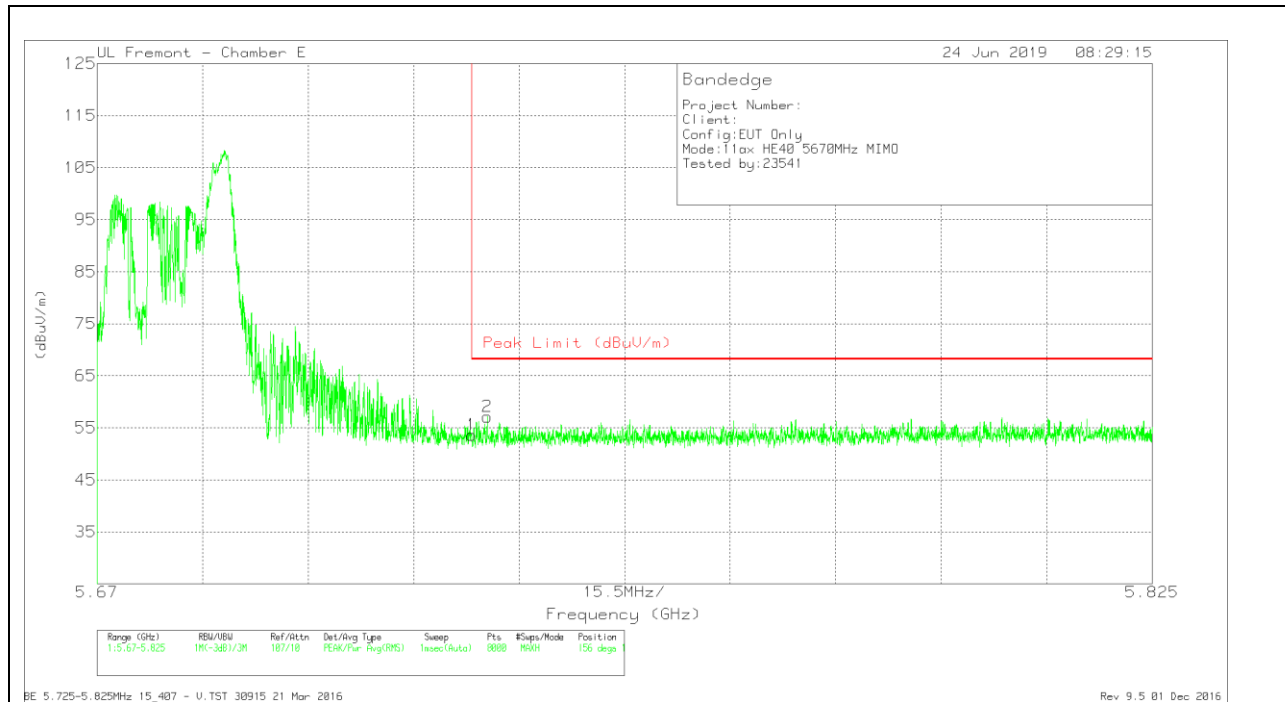

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

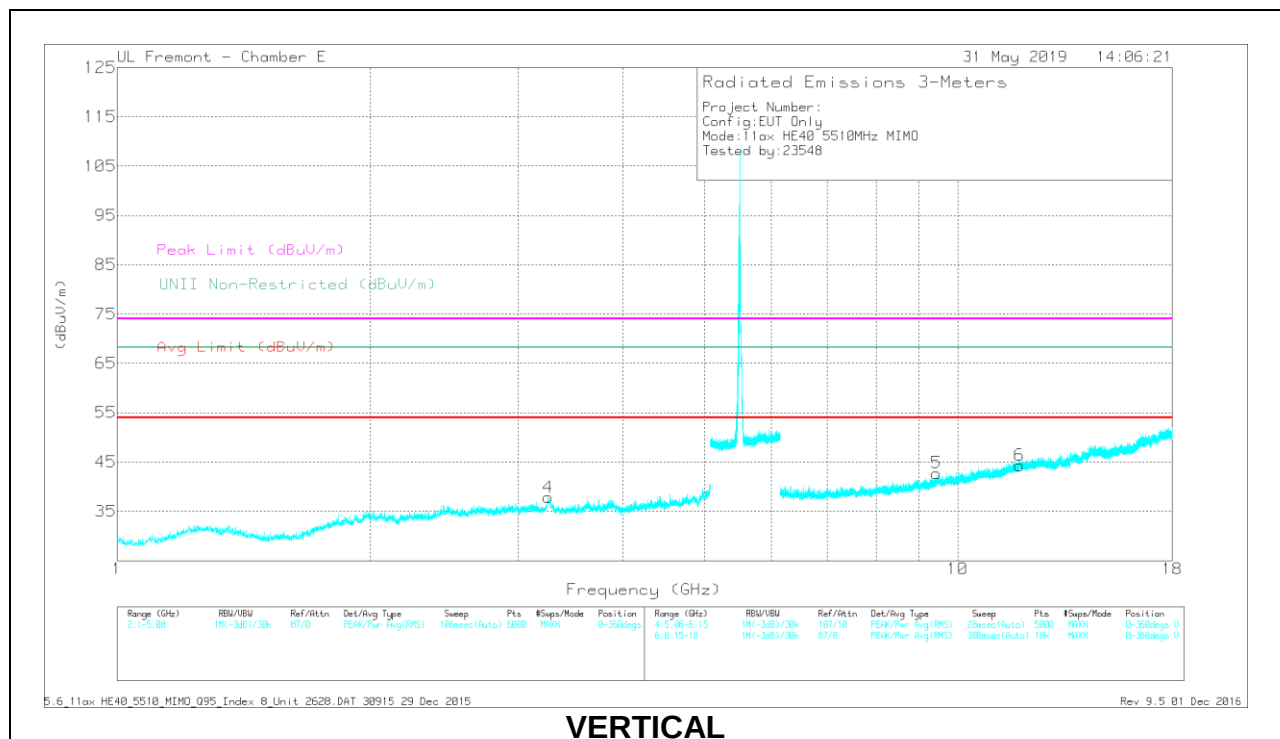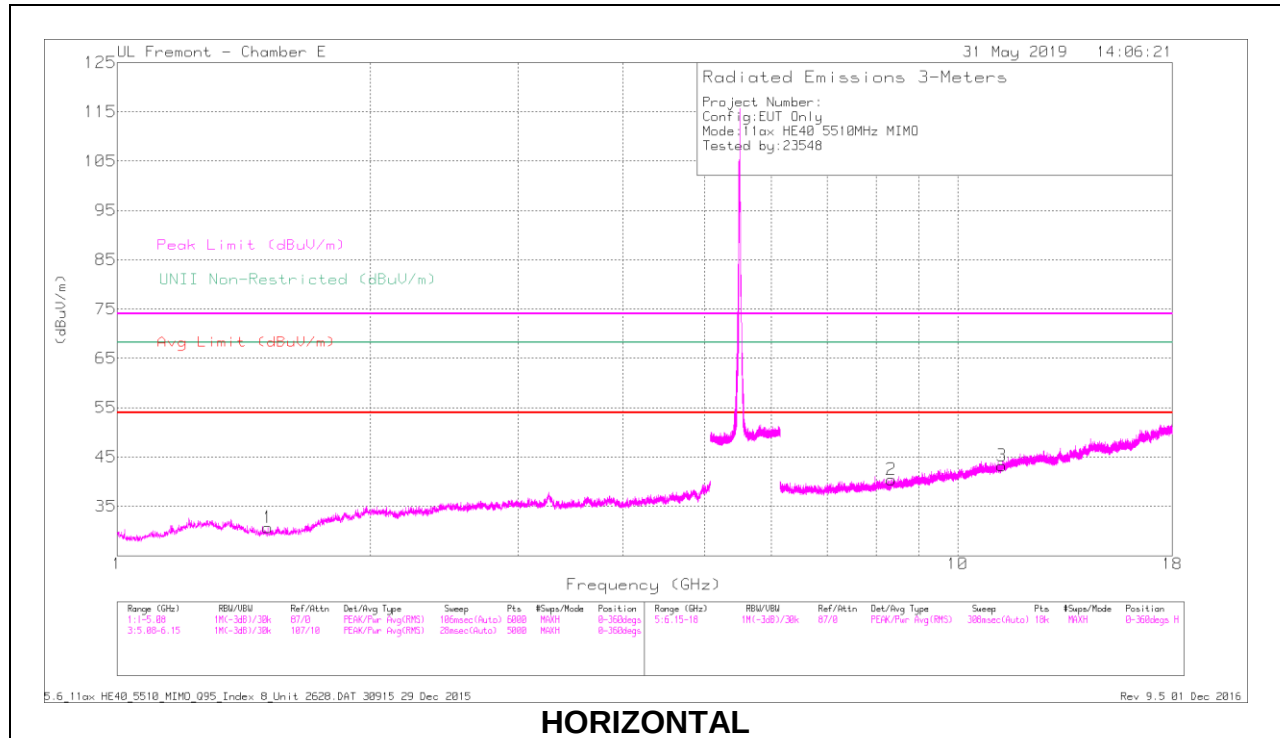

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBμV)	Det	AF 1119 (dB/m)	Amp/Ch/Hz/Pad (dB)	DC Corr (dB)	Corrected Reading (dBμV/m)	Avg Limit (dBμV/m)	Margin (dB)	Peak Limit (dBμV/m)	PK Margin (dB)	UNII Non-Restricted (dBμV/m)	PK Margin (dB)	Altitude (Feet)	Height (cm)	Polarity
1	* 1.514	45.44	PK-U	27.7	-35.6	0	37.54	-	-	74	-36.46	-	-	352	400	H
	* 1.514	33.32	ADR	27.7	-35.6	.09	25.42	54	-28.58	-	-	-	-	352	400	H
2	* 3.261	45.37	PK-U	35.1	-34.5	0	45.97	-	-	74	-28.03	-	-	227	235	V
	* 3.26	32.79	ADR	35.1	-34.5	.09	33.39	54	-20.61	-	-	-	-	227	235	V
3	* 8.331	37.9	PK-U	35.8	-27	0	46.7	-	-	74	-27.3	-	-	171	198	H
	* 8.331	26.46	ADR	35.8	-27	.09	35.26	54	-18.74	-	-	-	-	171	198	H
4	* 11.839	36.05	PK-U	38.9	-23.1	0	51.85	-	-	74	-22.15	-	-	169	131	V
	* 11.841	24.36	ADR	38.9	-23.1	.09	40.16	54	-13.84	-	-	-	-	169	131	V
5	* 11.284	36.21	PK-U	38.1	-23.8	0	50.51	-	-	74	-23.49	-	-	321	366	H
	* 11.283	24.52	ADR	38.1	-23.8	.09	38.82	54	-15.18	-	-	-	-	321	366	H
6	* 9.434	37.17	PK-U	36.5	-25.1	0	48.57	-	-	74	-25.43	-	-	237	193	V
	* 9.434	25.43	ADR	36.5	-25.1	.09	36.83	54	-17.17	-	-	-	-	237	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

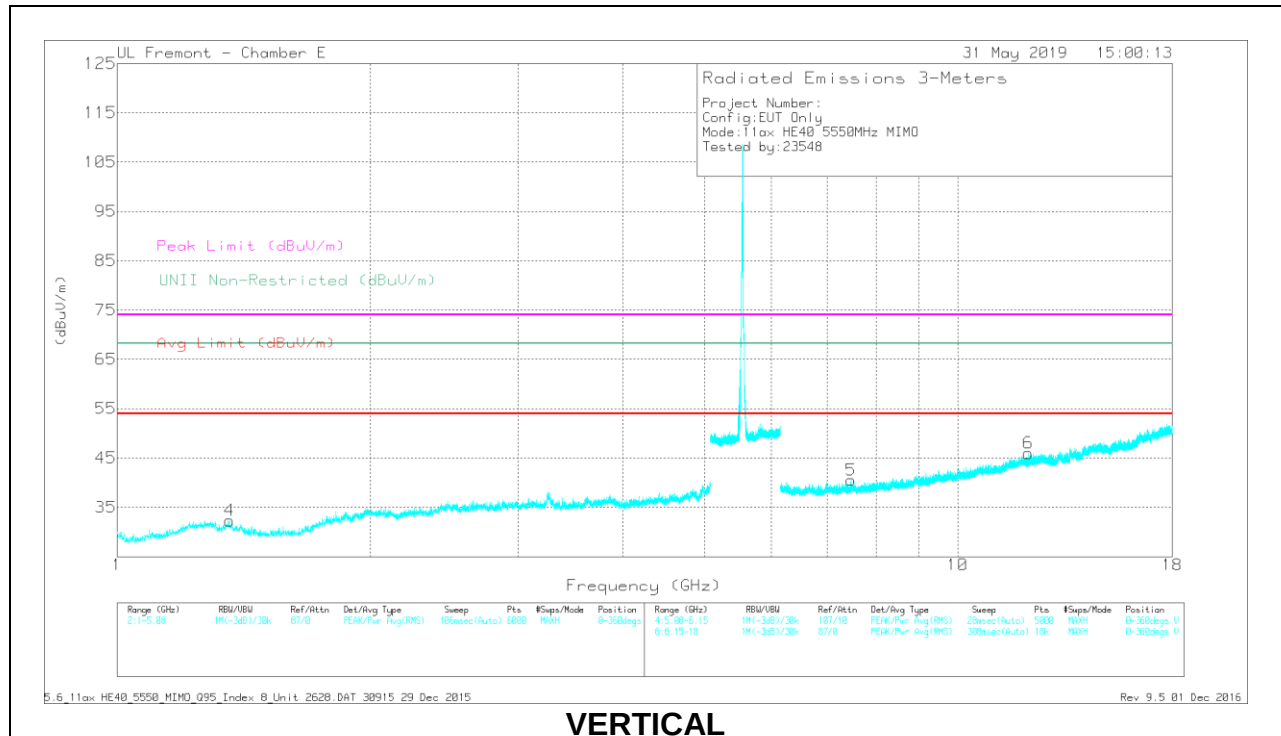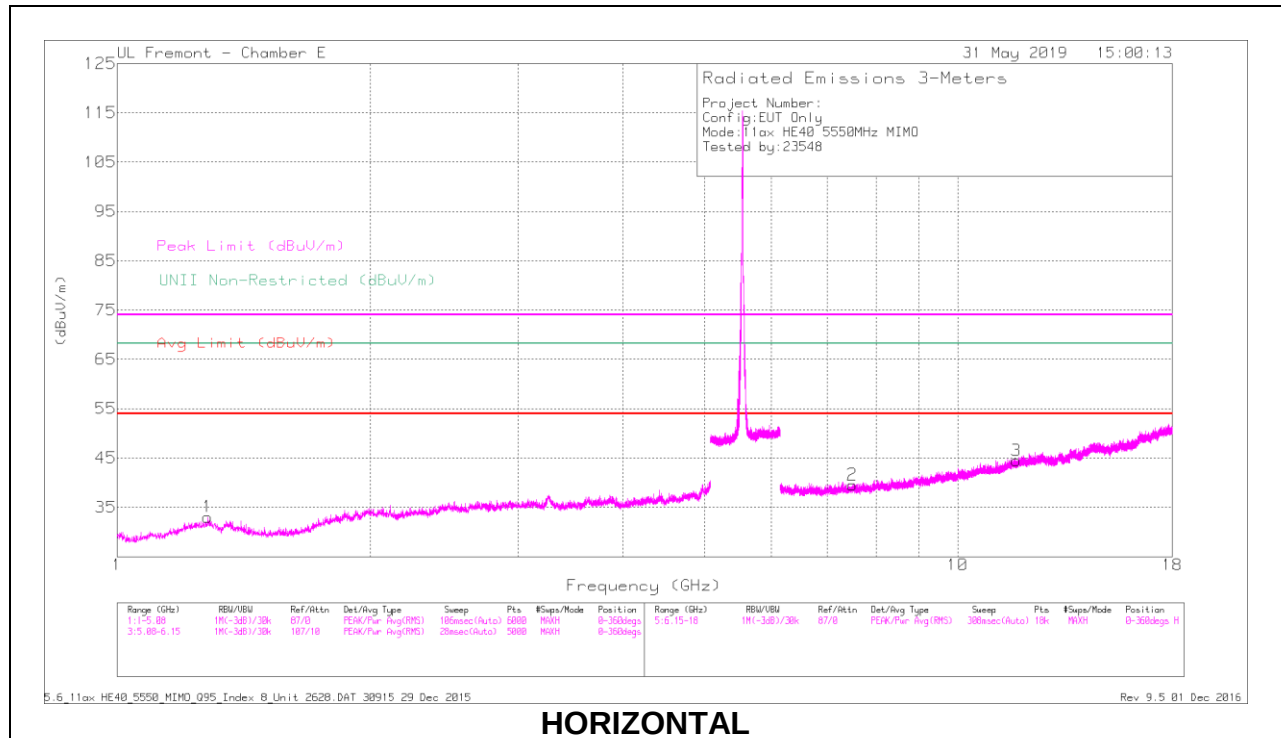

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Flt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (cm)	Polarity
1	* 1.283	45.28	PK-U	30	-35.4	0	39.88	-	-	74	-34.12	-	-	282	337	H
	* 1.283	33.01	ADR	30	-35.4	.09	27.7	54	-26.3	-	-	-	-	282	337	H
2	* 7.493	38.6	PK-U	35.8	-27.7	0	46.7	-	-	74	-27.3	-	-	288	128	H
	* 7.495	26.75	ADR	35.7	-27.7	.09	34.84	54	-19.16	-	-	-	-	288	128	H
3	* 11.741	36.22	PK-U	38.8	-23.1	0	51.92	-	-	74	-22.08	-	-	4	177	H
	* 11.739	24.11	ADR	38.8	-23.1	.09	39.9	54	-14.1	-	-	-	-	4	177	H
4	* 1.361	45.59	PK-U	29.7	-35.5	0	39.79	-	-	74	-34.21	-	-	212	400	V
	* 1.361	33.17	ADR	29.7	-35.5	.09	27.46	54	-26.54	-	-	-	-	212	400	V
5	* 7.466	38.73	PK-U	35.7	-27.9	0	46.53	-	-	74	-27.47	-	-	284	307	V
	* 7.466	27	ADR	35.7	-27.9	.09	34.89	54	-19.11	-	-	-	-	284	307	V
6	* 12.135	35.69	PK-U	39	-22.7	0	51.99	-	-	74	-22.01	-	-	100	302	V
	* 12.137	23.99	ADR	39	-22.6	.09	40.48	54	-13.52	-	-	-	-	100	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

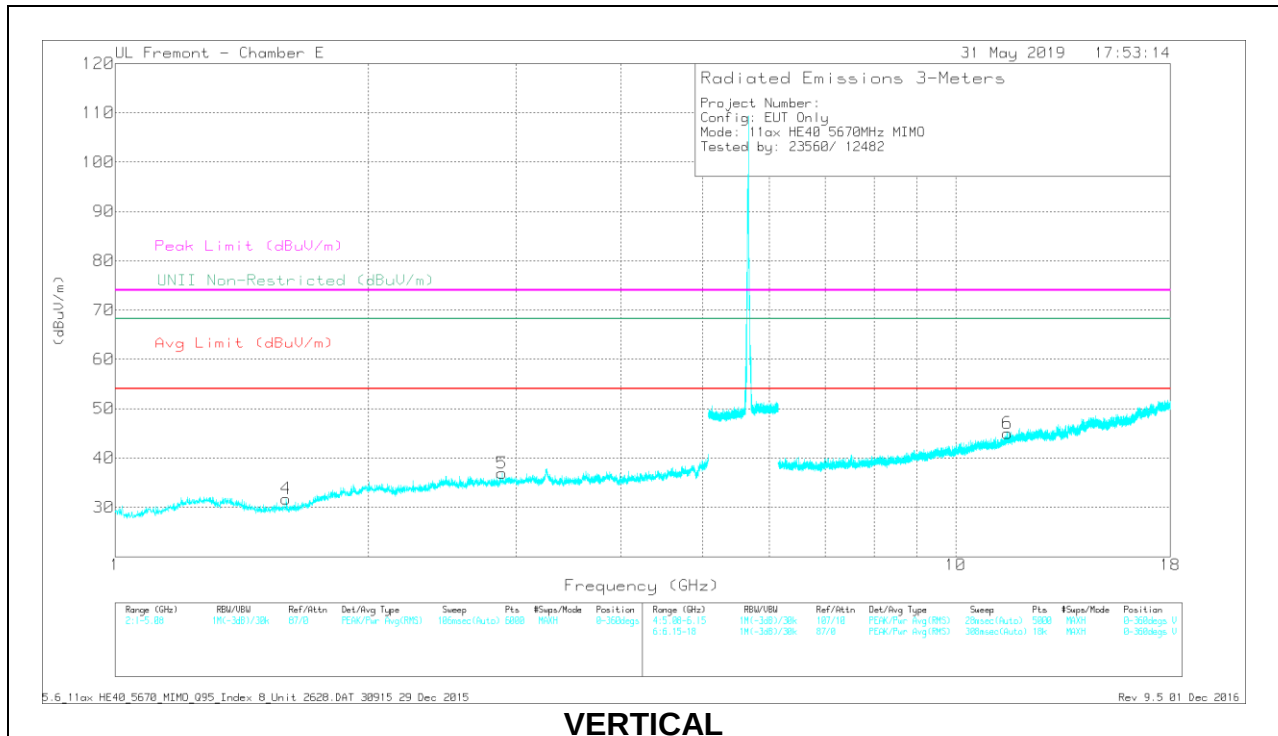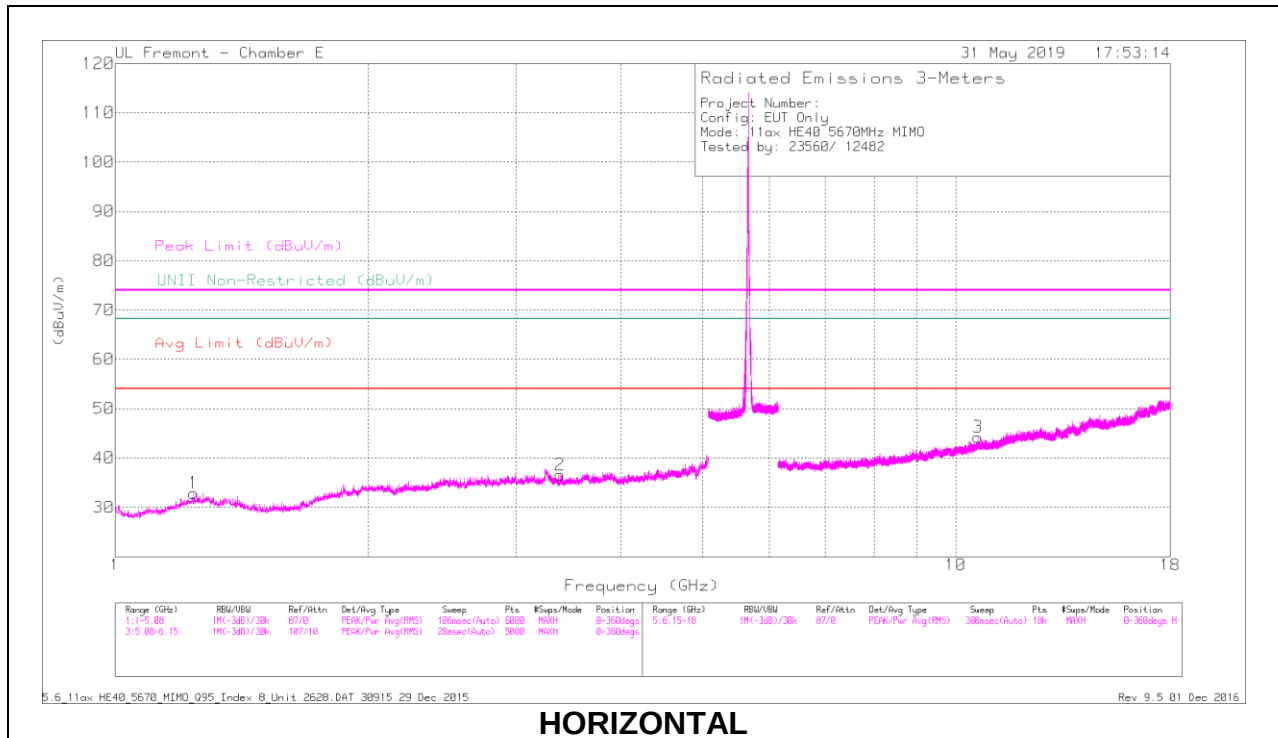

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.243	44.83	PK-U	29.8	-35.4	39.23	-	-	74	-34.77	-	-	18	115	H
	* 1.242	33.22	ADR	29.8	-35.4	27.62	54	-26.38	-	-	-	-	18	115	H
2	3.384	45.13	PK-U	32.8	-34.3	43.63	-	-	-	-	68.2	-24.57	216	120	H
3	* 10.628	37.44	PK-U	37.8	-24.9	50.34	-	-	74	-23.66	-	-	78	252	H
	* 10.628	26.17	ADR	37.8	-24.9	39.07	54	-14.93	-	-	-	-	78	252	H
4	* 1.597	45.33	PK-U	28.2	-35.5	38.03	-	-	74	-35.97	-	-	90	257	V
	* 1.597	33.58	ADR	28.2	-35.5	26.28	54	-27.72	-	-	-	-	90	257	V
5	* 2.886	45.49	PK-U	33	-35.3	43.19	-	-	74	-30.81	-	-	26	120	V
	* 2.885	34.26	ADR	33	-35.3	31.96	54	-22.04	-	-	-	-	26	120	V
6	* 11.525	36.04	PK-U	38.5	-23.3	51.24	-	-	74	-22.76	-	-	124	193	V
	* 11.527	25.16	ADR	38.5	-23.4	40.26	54	-13.74	-	-	-	-	124	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

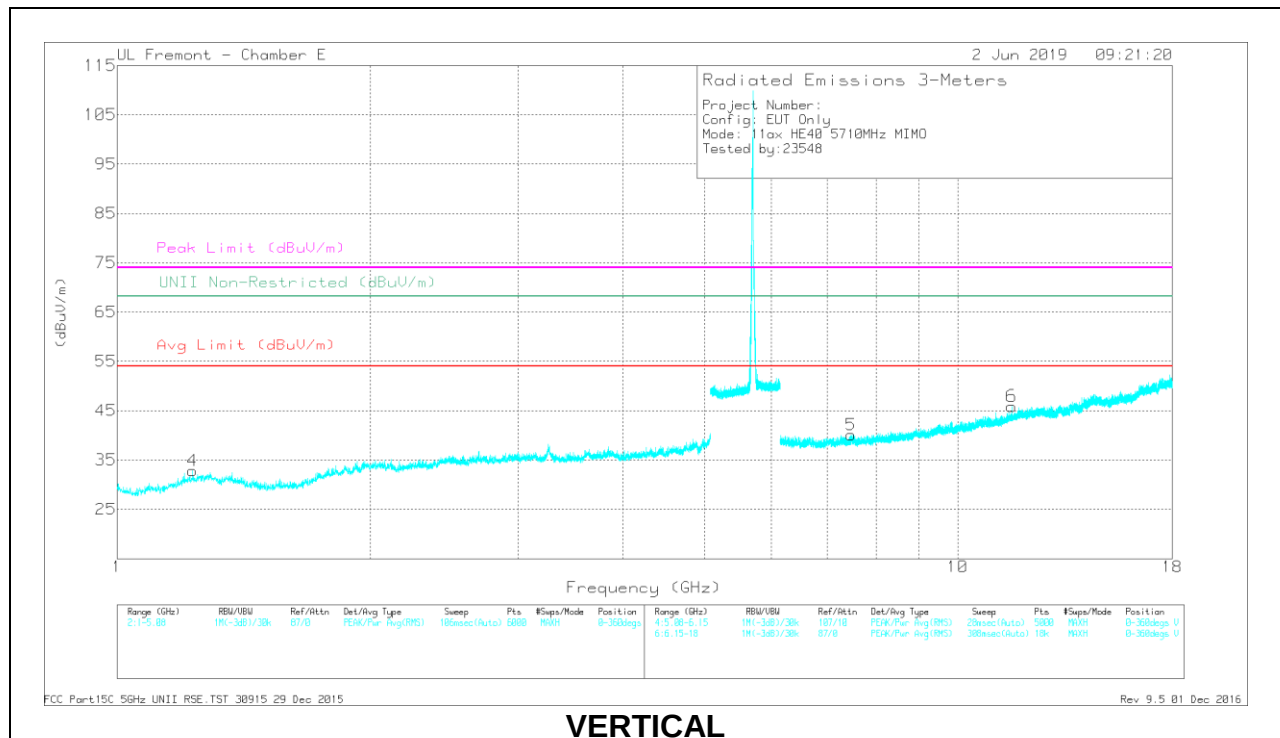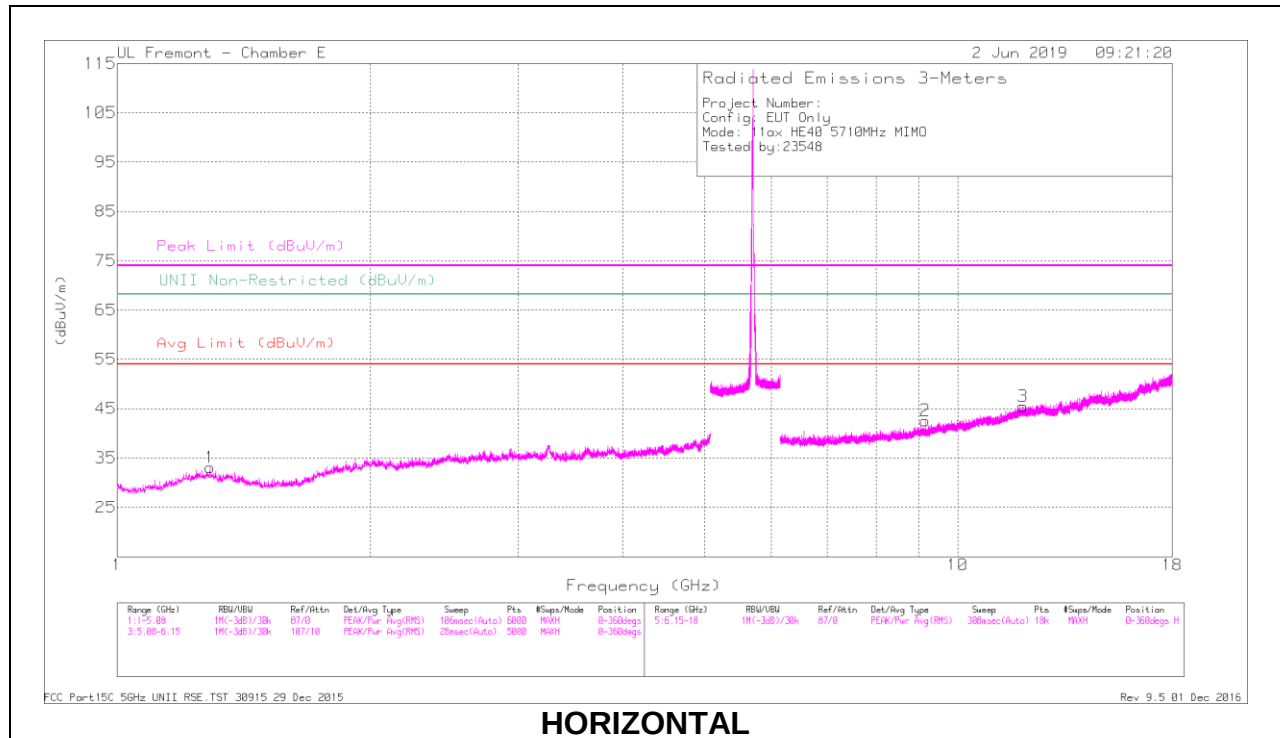

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.29	45.63	PK-U	30	-35.5	40.13	-	-	74	-33.87	-	-	32	332	H
	* 1.289	33.12	ADR	30	-35.5	27.62	54	-26.38	-	-	-	-	32	332	H
2	* 9.152	36.92	PK-U	36.3	-25.5	47.72	-	-	74	-26.28	-	-	339	330	H
	* 9.153	25.42	ADR	36.2	-25.5	36.12	54	-17.88	-	-	-	-	339	330	H
3	* 11.958	35.72	PK-U	39	-23	51.72	-	-	74	-22.28	-	-	6	264	H
	* 11.956	24.08	ADR	39	-23	40.08	54	-13.92	-	-	-	-	6	264	H
4	* 1.23	45.05	PK-U	29.9	-35.4	39.55	-	-	74	-34.45	-	-	104	244	V
	* 1.229	32.76	ADR	29.8	-35.4	27.16	54	-26.84	-	-	-	-	104	244	V
5	* 7.473	38.96	PK-U	35.8	-27.8	46.96	-	-	74	-27.04	-	-	118	154	V
	* 7.472	27.03	ADR	35.8	-27.8	35.03	54	-18.97	-	-	-	-	118	154	V
6	* 11.596	36.14	PK-U	38.6	-23.2	51.54	-	-	74	-22.46	-	-	253	362	V
	* 11.597	24.3	ADR	38.6	-23.2	39.7	54	-14.3	-	-	-	-	253	362	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

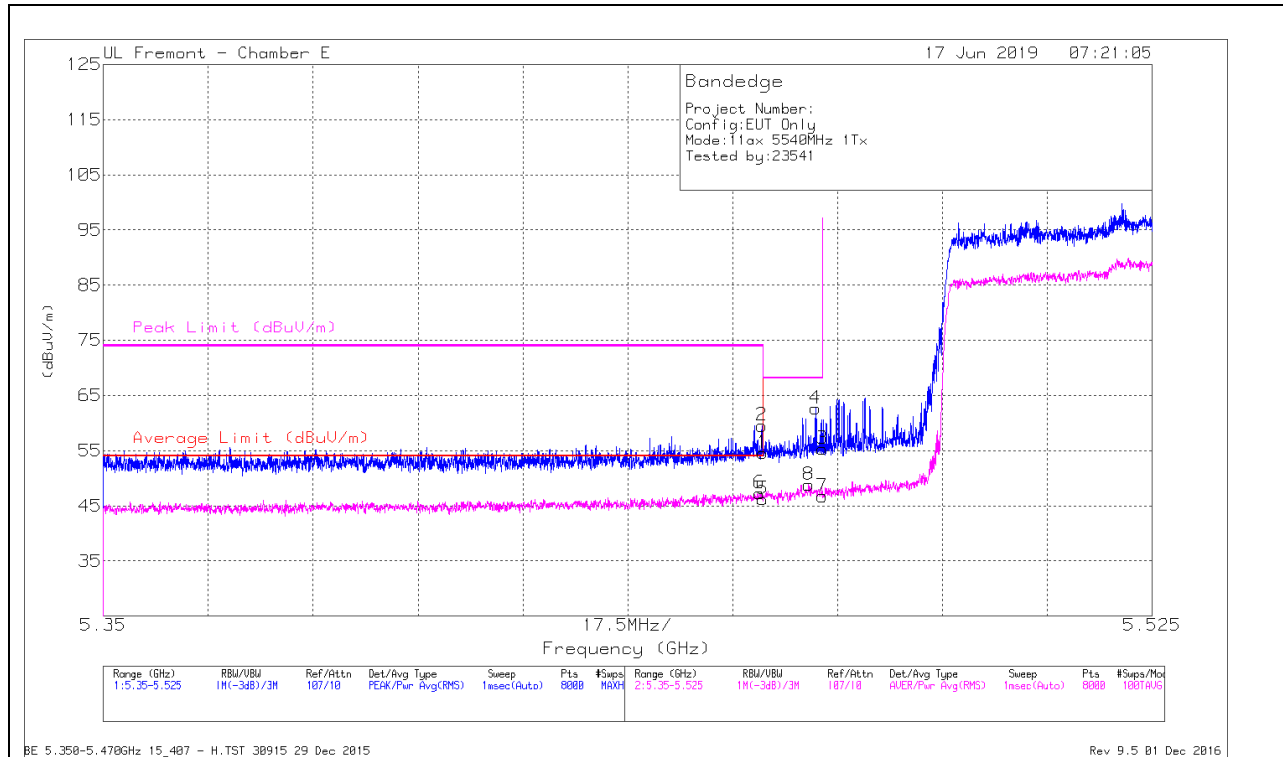


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.28	Pk	34.6	-21.3	54.58	-	-	74	-19.42	342	117	H
2	* 5.46	46.22	Pk	34.6	-21.3	59.52	-	-	74	-14.48	342	117	H
3	5.47	42.03	Pk	34.6	-21.3	55.33	-	-	68.2	-12.87	342	117	H
4	5.469	49.34	Pk	34.6	-21.3	62.64	-	-	68.2	-5.56	342	117	H
5	* 5.46	32.91	RMS	34.6	-21.3	46.21	54	-7.79	-	-	342	117	H
6	* 5.459	33.95	RMS	34.6	-21.3	47.25	54	-6.75	-	-	342	117	H
7	5.47	33.44	RMS	34.6	-21.3	46.74	-	-	-	-	342	117	H
8	5.468	35.62	RMS	34.5	-21.3	48.82	-	-	-	-	342	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

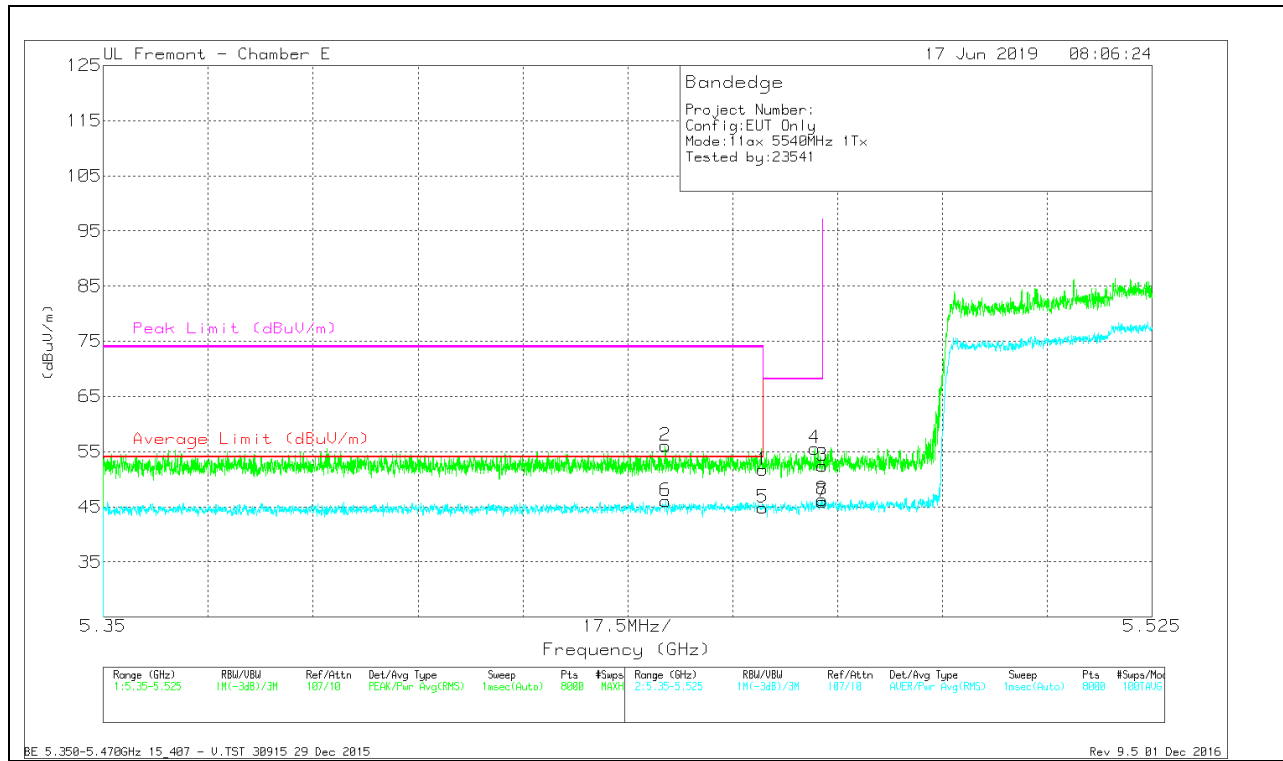


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.41	Pk	34.6	-21.3	51.71	-	-	74	-22.29	237	126	V
2	* 5.444	42.95	Pk	34.5	-21.4	56.05	-	-	74	-17.95	237	126	V
3	5.47	39.12	Pk	34.6	-21.3	52.42	-	-	68.2	-15.78	237	126	V
4	5.469	42.27	Pk	34.6	-21.3	55.57	-	-	68.2	-12.63	237	126	V
5	* 5.46	31.54	RMS	34.6	-21.3	44.84	54	-9.16	-	-	237	126	V
6	* 5.444	32.96	RMS	34.5	-21.4	46.06	54	-7.94	-	-	237	126	V
7	5.47	32.6	RMS	34.6	-21.3	45.9	-	-	-	-	237	126	V
8	5.47	33.01	RMS	34.6	-21.3	46.31	-	-	-	-	237	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

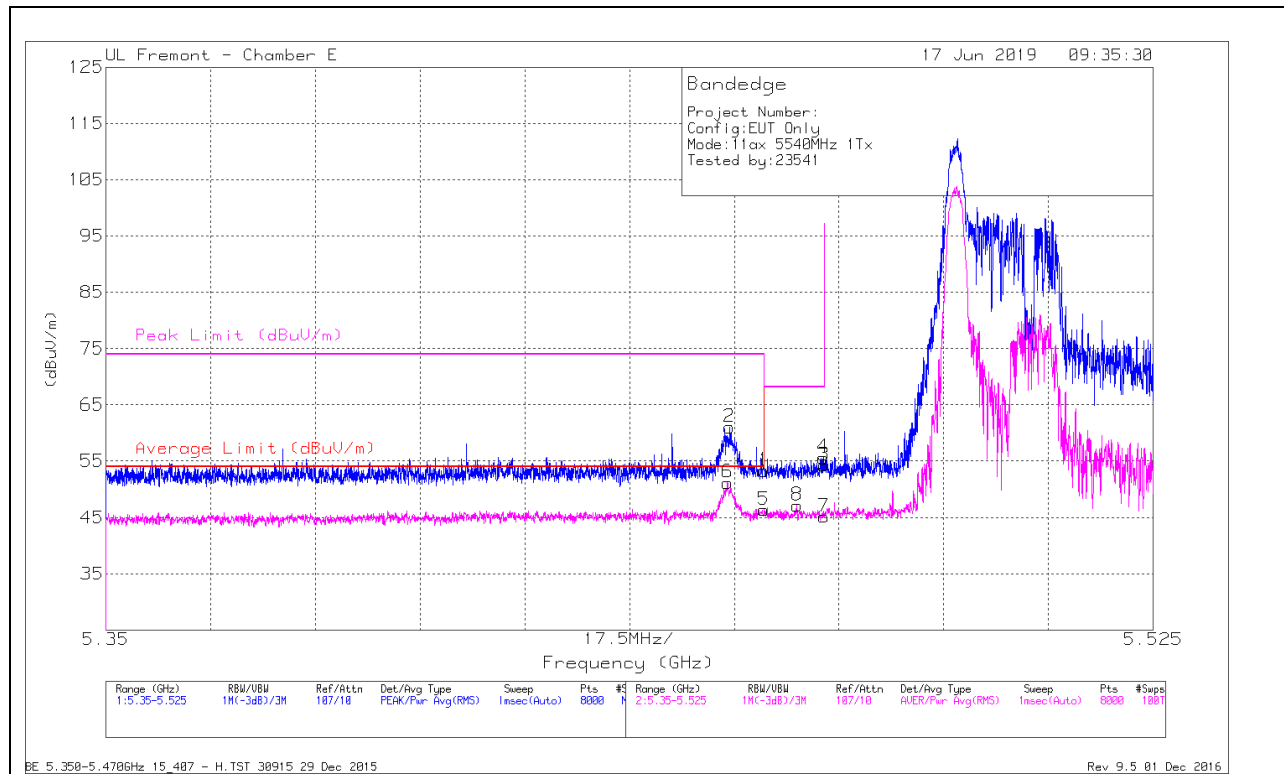1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40	Pk	34.6	-21.3	53.3	-	-	74	-20.7	343	117	H
2	* 5.454	47.85	Pk	34.6	-21.4	61.05	-	-	74	-12.95	343	117	H
3	5.47	40.94	Pk	34.6	-21.3	54.24	-	-	68.2	-13.96	343	117	H
4	5.47	42.3	Pk	34.6	-21.3	55.6	-	-	68.2	-12.6	343	117	H
5	* 5.46	33.06	RMS	34.6	-21.3	46.36	54	-7.64	-	-	343	117	H
6	* 5.454	37.96	RMS	34.6	-21.4	51.16	54	-2.84	-	-	343	117	H
7	5.47	31.83	RMS	34.6	-21.3	45.13	-	-	-	-	343	117	H
8	5.465	33.91	RMS	34.5	-21.3	47.11	-	-	-	-	343	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

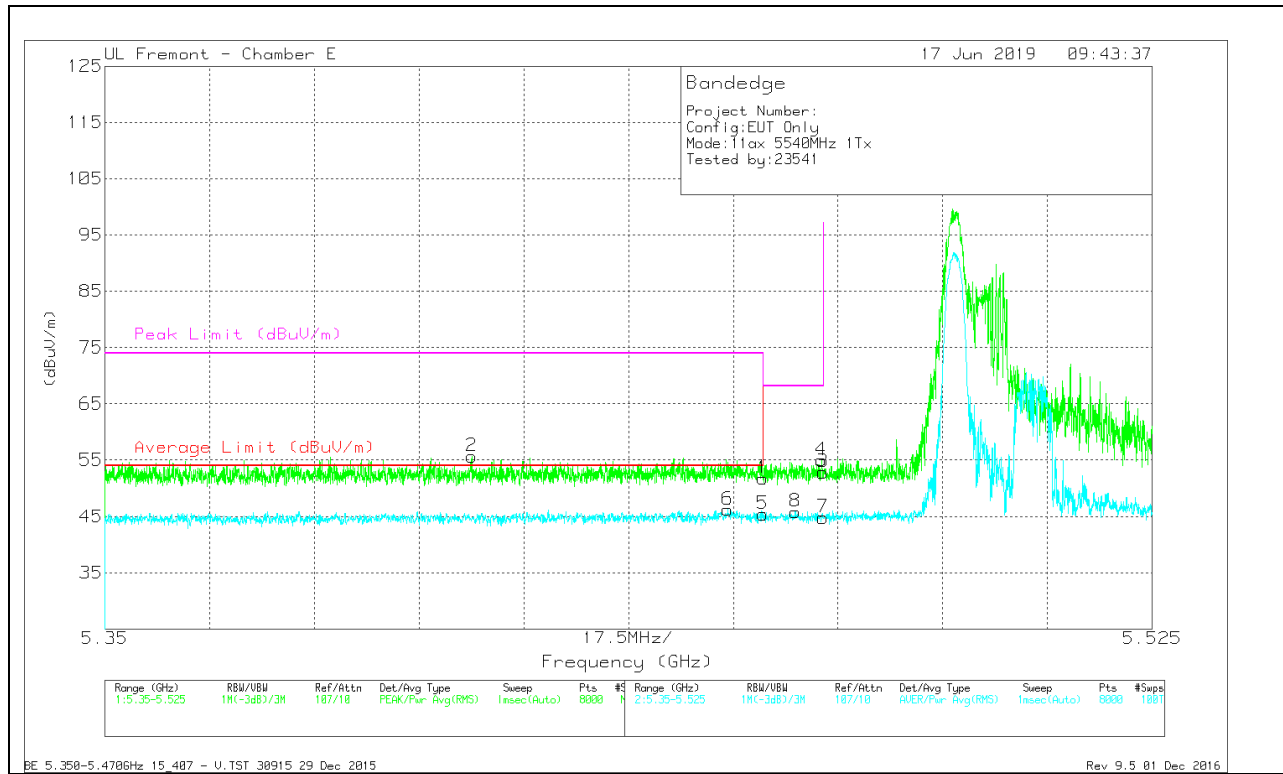


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.46	Pk	34.6	-21.3	51.76	-	-	74	-22.24	237	125	V
2	* 5.411	42.57	Pk	34.5	-21.4	55.67	-	-	74	-18.33	237	125	V
3	5.47	39.56	Pk	34.6	-21.3	52.86	-	-	68.2	-15.34	237	125	V
4	5.47	41.7	Pk	34.6	-21.3	55	-	-	68.2	-13.2	237	125	V
5	* 5.46	32.06	RMS	34.6	-21.3	45.36	54	-8.64	-	-	237	125	V
6	* 5.454	33.01	RMS	34.6	-21.4	46.21	54	-7.79	-	-	237	125	V
7	5.47	31.48	RMS	34.6	-21.3	44.78	-	-	-	-	237	125	V
8	5.465	32.6	RMS	34.5	-21.3	45.8	-	-	-	-	237	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

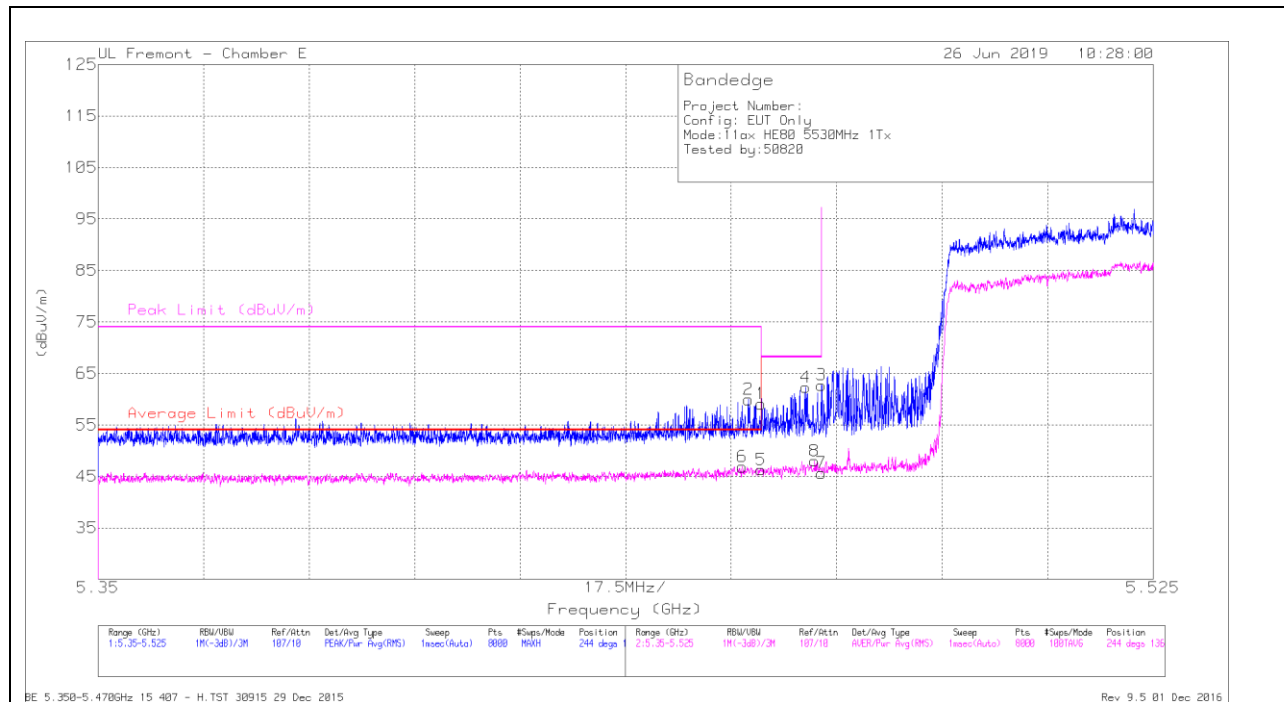1TX Antenna 6 MODE – 996 Tones, RU Index 67**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.78	Pk	34.6	-21.3	59.08	-	-	74	-14.92	244	136	H
2	* 5.458	46.63	Pk	34.6	-21.3	59.93	-	-	74	-14.07	244	136	H
3	5.47	49.42	Pk	34.6	-21.3	62.72	-	-	68.2	-5.48	244	136	H
4	5.467	49.1	Pk	34.5	-21.3	62.3	-	-	68.2	-5.9	244	136	H
5	* 5.46	33	RMS	34.6	-21.3	46.3	54	-7.7	-	-	244	136	H
6	* 5.457	33.57	RMS	34.6	-21.3	46.87	54	-7.13	-	-	244	136	H
7	5.47	32.33	RMS	34.6	-21.3	45.63	-	-	-	-	244	136	H
8	5.469	34.68	RMS	34.6	-21.3	47.98	-	-	-	-	244	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection