

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.147	43.66	PK2	27.8	-23.7	47.76	-	-	74	-26.24	87	206	V
	* 1.148	31.83	MAv1	27.8	-23.7	35.93	54	-18.07	-	-	87	206	V
3	* 3.618	40.56	PK2	35.7	-30.1	46.16	-	-	74	-27.84	286	124	H
	* 3.619	28.73	MAv1	35.7	-30.1	34.33	54	-19.67	-	-	286	124	H
4	* 15.539	37.59	PK2	40.9	-22.7	55.79	-	-	74	-18.21	341	101	H
	* 15.537	25.89	MAv1	40.9	-22.7	44.09	54	-9.91	-	-	341	101	H
5	* 4.738	40.81	PK2	34.2	-29.5	45.51	-	-	74	-28.49	42	264	V
	* 4.74	28.97	MAv1	34.2	-29.5	33.67	54	-20.33	-	-	42	264	V
6	* 11.764	36.82	PK2	39.4	-23.4	52.82	-	-	74	-21.18	114	209	V
	* 11.763	25.19	MAv1	39.4	-23.4	41.19	54	-12.81	-	-	114	209	V
1	2.904	42.84	PK2	32.6	-21.8	53.64	-	-	-	-	29	301	H
	2.905	30.86	MAv1	32.7	-21.8	41.76	-	-	-	-	29	301	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

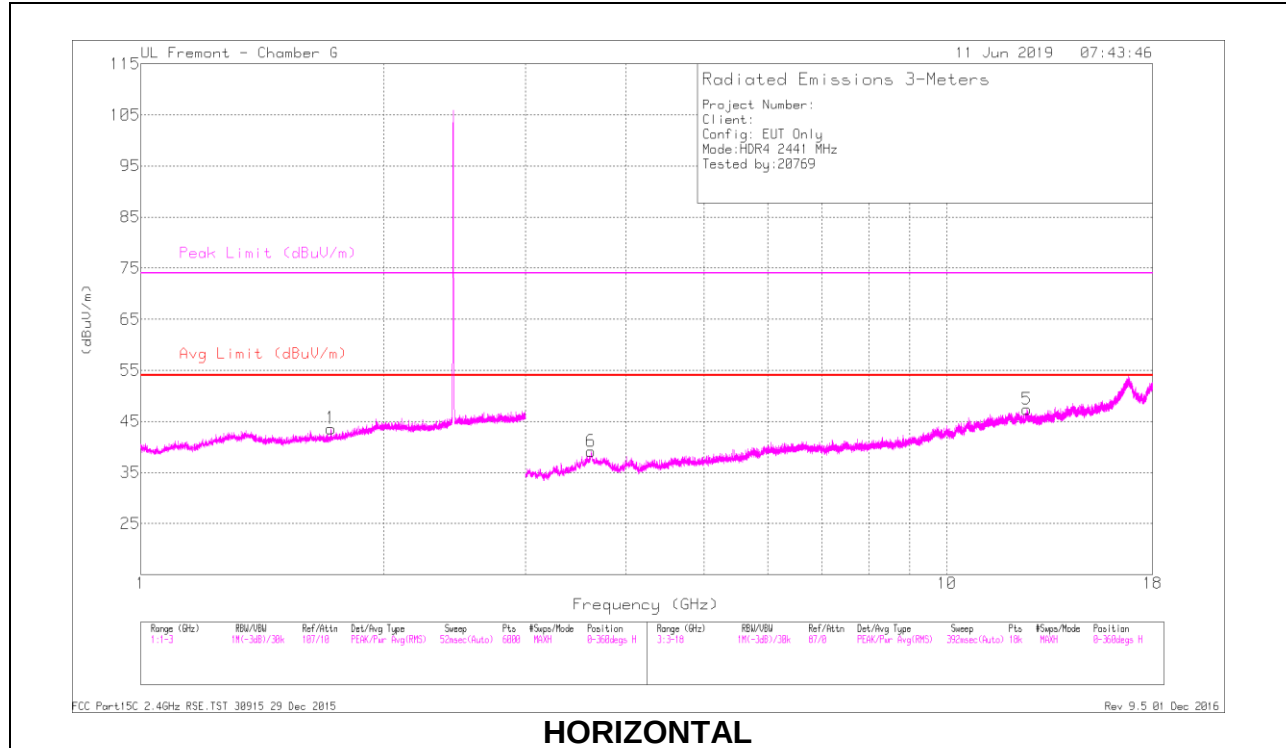

HORIZONTAL

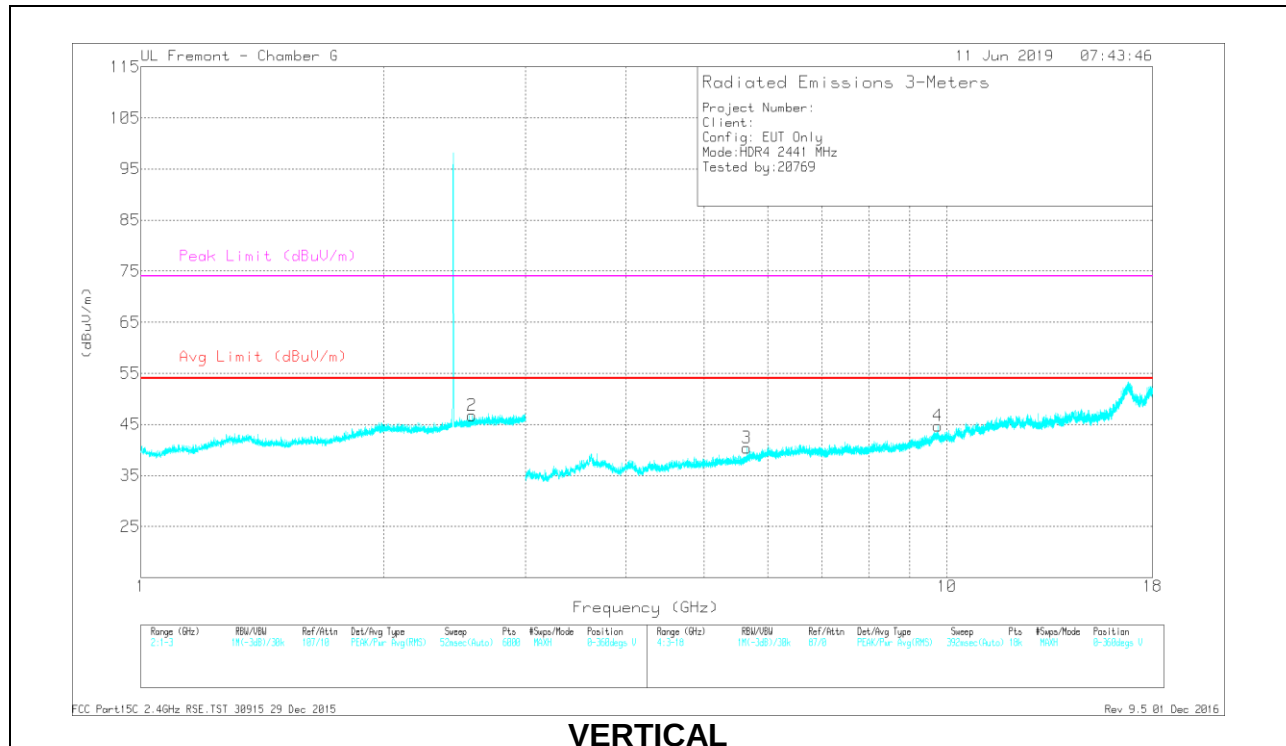

VERTICAL

RADIATED EMISSIONS



Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.719	43.18	PK2	29	-21.9	50.28	-	-	74	-23.72	96	309	H
	* 1.719	30.97	MAv1	29	-21.9	38.07	54	-15.93	-	-	96	309	H
5	* 12.568	36.05	PK2	39.7	-22.5	53.25	-	-	74	-20.75	245	176	H
	* 12.566	24.69	MAv1	39.7	-22.6	41.79	54	-12.21	-	-	245	176	H
6	* 3.621	40.76	PK2	35.7	-30	46.46	-	-	74	-27.54	62	310	H
	* 3.621	29.18	MAv1	35.7	-30	34.88	54	-19.12	-	-	62	310	H
2	2.575	31.57	MAv1	32.5	-22.1	41.97	-	-	-	-	202	150	V
	2.578	44.43	PK2	32.5	-22.1	54.83	-	-	-	-	202	150	V
3	5.648	40.23	PK2	35	-28.8	46.43	-	-	-	-	105	151	V
	5.65	28.44	MAv1	34.9	-28.8	34.54	-	-	-	-	105	151	V
4	9.749	25.84	MAv1	37.4	-24.6	38.64	-	-	-	-	215	130	V
	9.75	37.13	PK2	37.4	-24.6	49.93	-	-	-	-	215	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

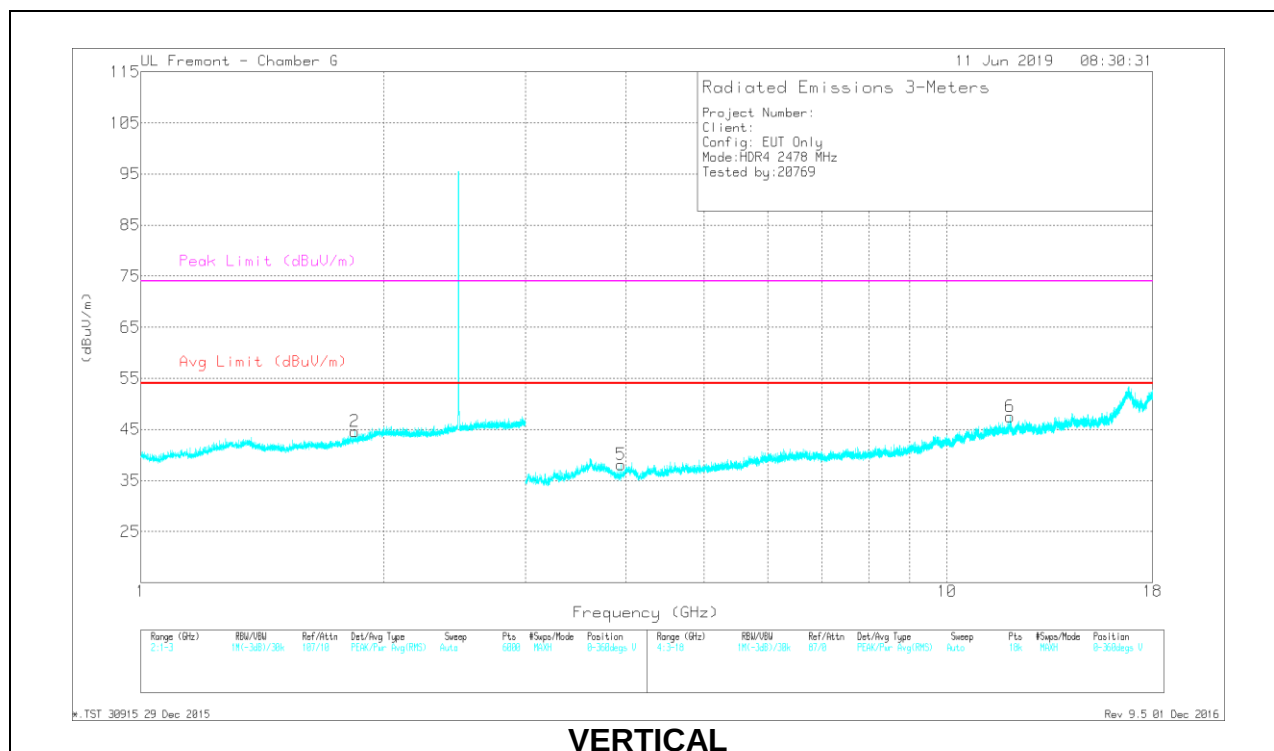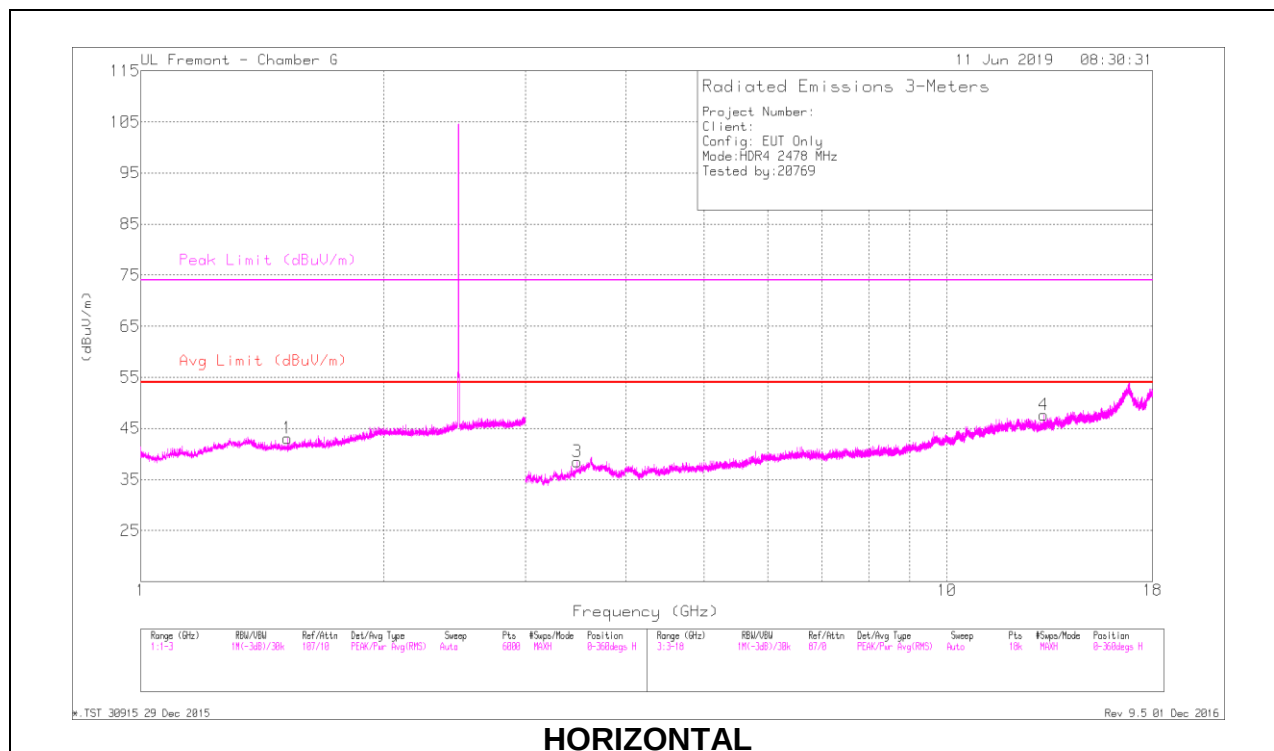

RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.519	43.49	PK2	27.7	-21.9	49.29	-	-	74	-24.71	276	156	H
	* 1.521	31.38	MAv1	27.7	-21.8	37.28	54	-16.72	-	-	276	156	H
5	* 3.946	41.04	PK2	33.6	-30.1	44.54	-	-	74	-29.46	229	179	V
	* 3.946	28.38	MAv1	33.6	-30.1	31.88	54	-22.12	-	-	229	179	V
6	* 11.989	36.26	PK2	39.5	-22.3	53.46	-	-	74	-20.54	355	203	V
	* 11.986	24.67	MAv1	39.5	-22.4	41.77	54	-12.23	-	-	355	203	V
2	1.841	30.65	MAv1	30.7	-22.5	38.85	-	-	-	-	324	307	V
	1.844	43.03	PK2	30.7	-22.5	51.23	-	-	-	-	324	307	V
3	3.48	40.72	PK2	34.4	-30	45.12	-	-	-	-	209	310	H
	3.48	28.76	MAv1	34.4	-30	33.16	-	-	-	-	209	310	H
4	13.199	36.52	PK2	39.6	-23.1	53.02	-	-	-	-	165	381	H
	13.201	25.38	MAv1	39.5	-23.3	41.58	-	-	-	-	165	381	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

Antenna 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

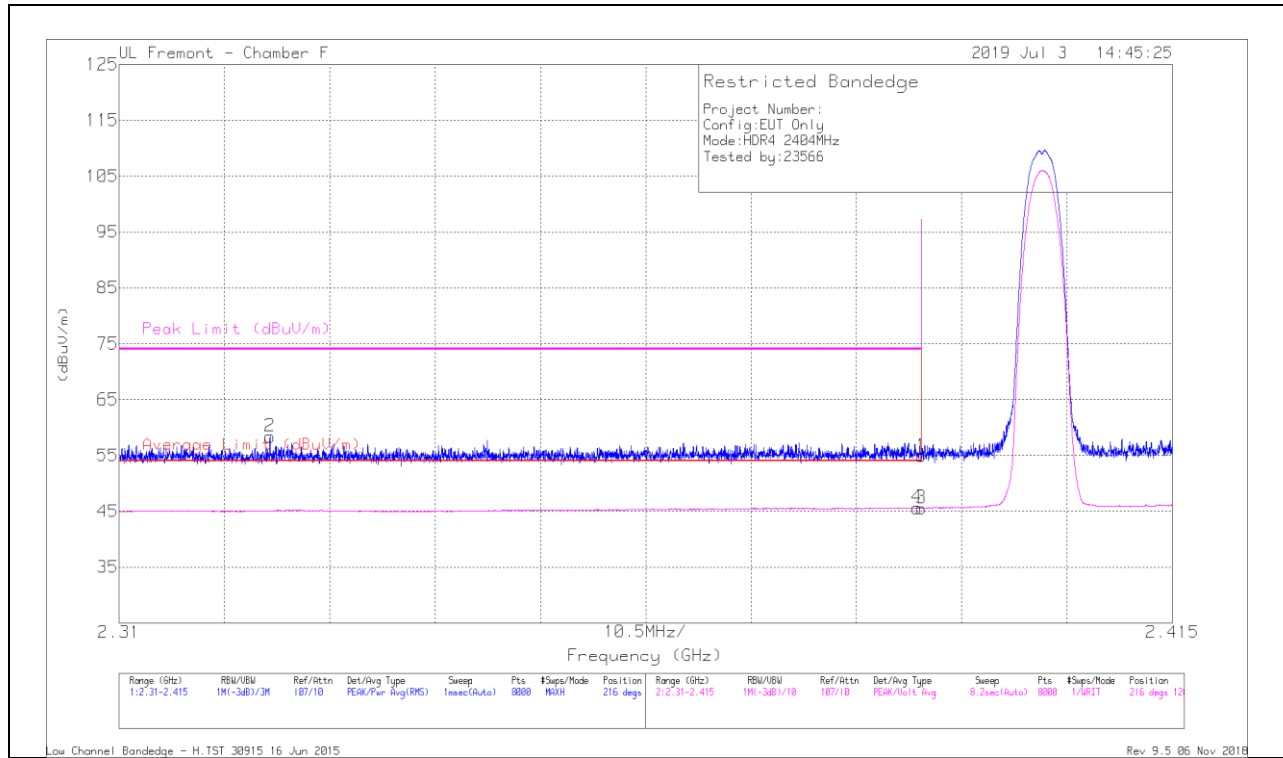


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.4	Pk	32	-14.5	54.9	-	-	74	-19.1	216	126	H
2	* 2.325	41.18	Pk	31.7	-14.5	58.38	-	-	74	-15.62	216	126	H
3	* 2.39	28.06	VA1T	32	-14.5	45.56	54	-8.44	-	-	216	126	H
4	* 2.39	28.1	VA1T	32	-14.5	45.6	54	-8.4	-	-	216	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

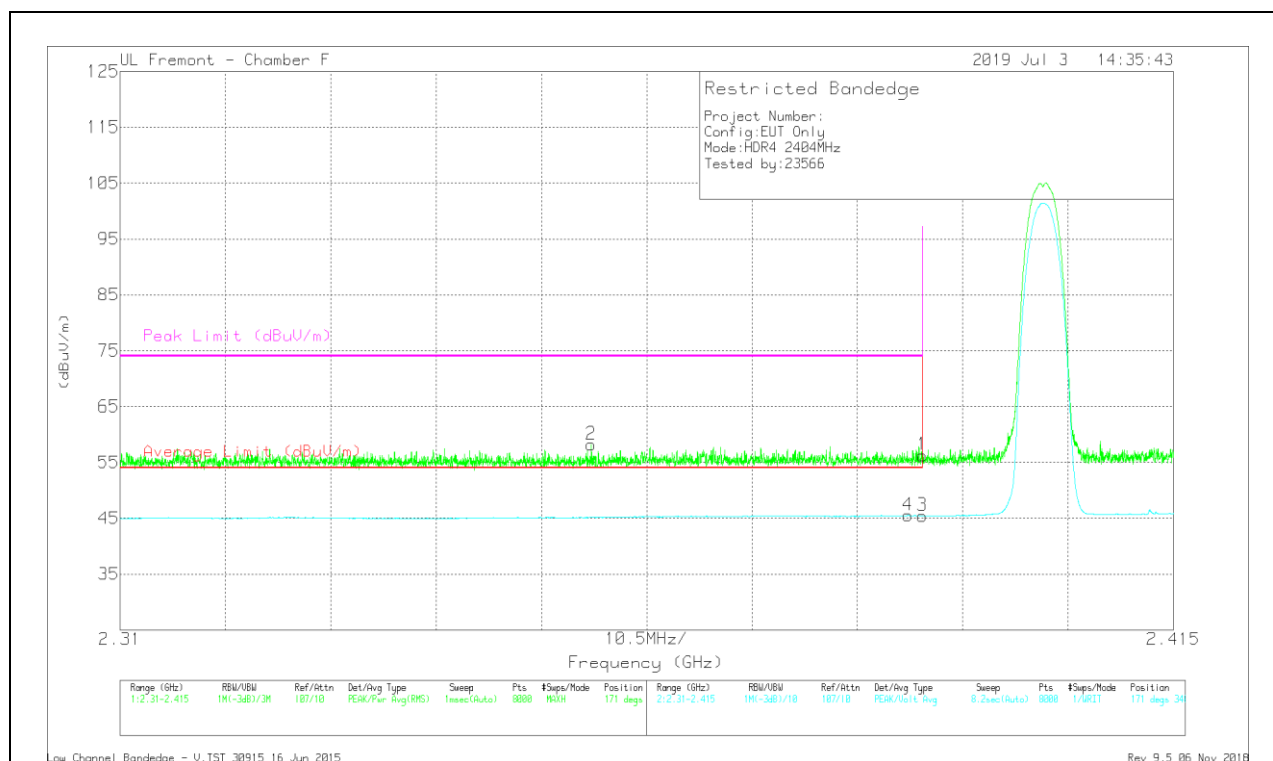

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbll/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.79	Pk	32	-14.5	56.29	-	-	74	-17.71	171	340	V
2	* 2.357	40.99	Pk	31.8	-14.6	58.19	-	-	74	-15.81	171	340	V
3	* 2.39	27.95	VA1T	32	-14.5	45.45	54	-8.55	-	-	171	340	V
4	* 2.389	28	VA1T	32	-14.5	45.5	54	-8.5	-	-	171	340	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEGE (HIGH CHANNEL)

HORIZONTAL RESULT

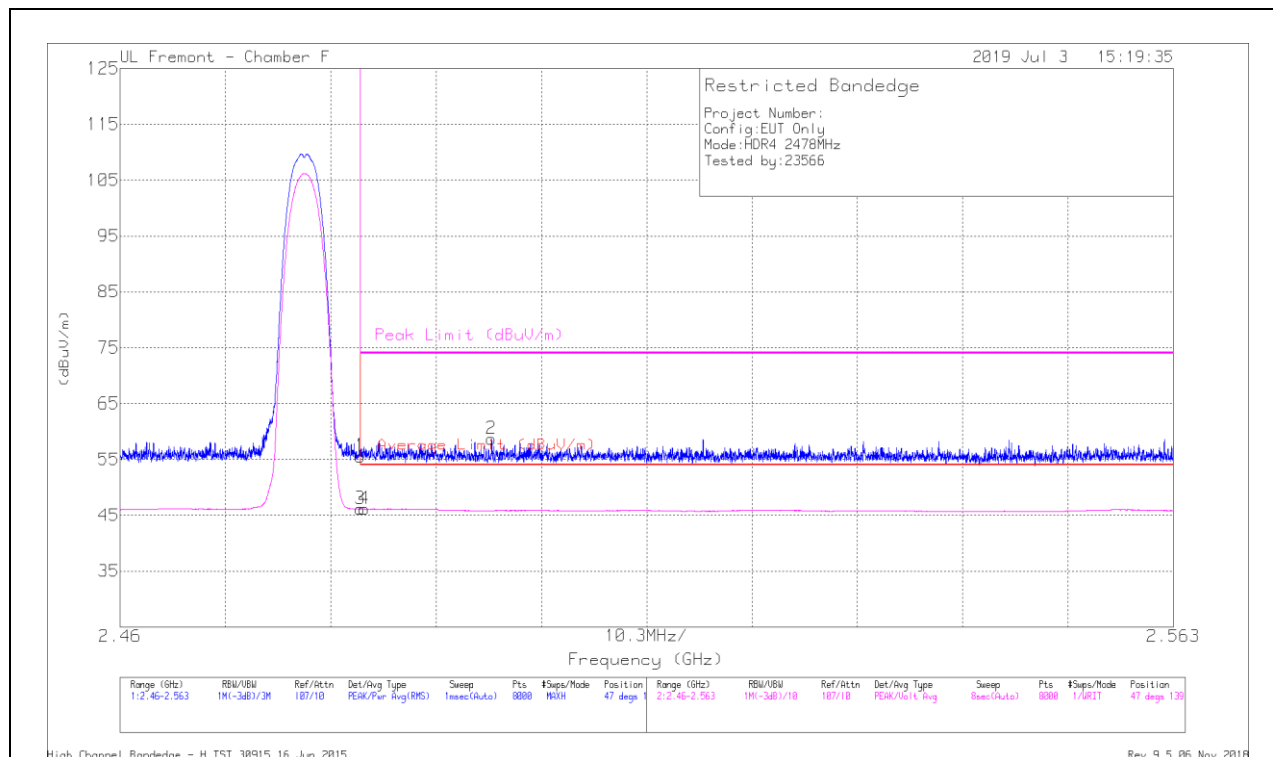

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.85	Pk	32.4	-14.7	55.55	-	-	74	-18.45	47	139	H
2	* 2.496	41.07	Pk	32.4	-14.8	58.67	-	-	74	-15.33	47	139	H
3	* 2.484	28.41	VA1T	32.4	-14.7	46.11	54	-7.89	-	-	47	139	H
4	* 2.484	28.43	VA1T	32.4	-14.7	46.13	54	-7.87	-	-	47	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbll/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.73	Pk	32.4	-14.7	55.43	-	-	74	-18.57	331	370	V
2	* 2.487	41.21	Pk	32.3	-14.6	58.91	-	-	74	-15.09	331	370	V
3	* 2.484	28.11	VA1T	32.4	-14.7	45.81	54	-8.19	-	-	331	370	V
4	2.558	28.07	VA1T	32.4	-14.5	45.97	54	-8.03	-	-	331	370	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

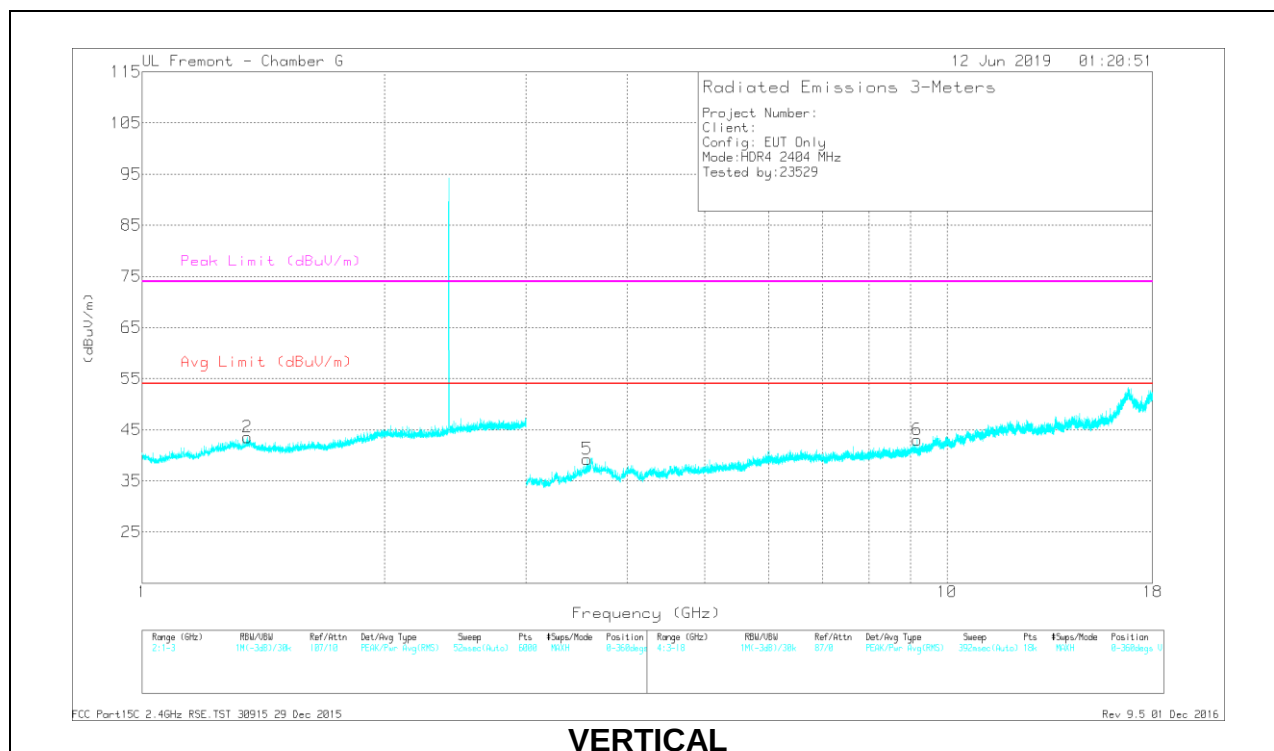
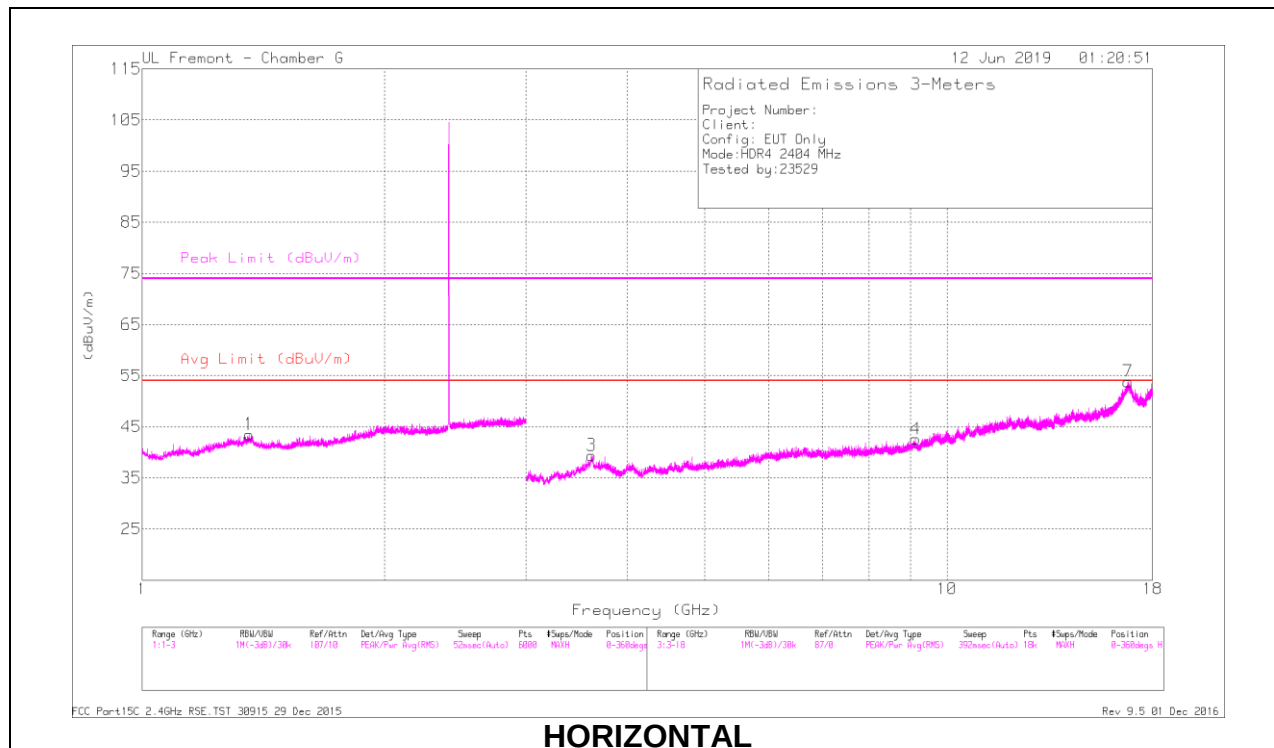


RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.356	43.33	PK2	30	-23.3	50.03	-	-	74	-23.97	0	101	H
	* 1.358	32.04	MAv1	30	-23.3	38.74	54	-15.26	-	-	0	101	H
2	* 1.353	42.93	PK2	30	-23.3	49.63	-	-	74	-24.37	0	101	V
	* 1.35	31.88	MAv1	29.9	-23.3	38.48	54	-15.52	-	-	0	101	V
3	* 3.616	40.96	PK2	35.6	-30.1	46.46	-	-	74	-27.54	0	101	H
	* 3.617	29.57	MAv1	35.7	-30.1	35.17	54	-18.83	-	-	0	101	H
4	* 9.14	38.18	PK2	36.5	-25.8	48.88	-	-	74	-25.12	0	101	H
	* 9.14	27.09	MAv1	36.5	-25.8	37.79	54	-16.21	-	-	0	101	H
5	* 3.571	41.46	PK2	35.2	-30.8	45.86	-	-	74	-28.14	0	101	V
	* 3.57	30.09	MAv1	35.2	-30.8	34.49	54	-19.51	-	-	0	101	V
6	* 9.179	37.93	PK2	36.5	-26.2	48.23	-	-	74	-25.77	0	101	V
	* 9.182	27.06	MAv1	36.5	-26.3	37.26	54	-16.74	-	-	0	101	V
7	16.789	24.83	MAv1	41.7	-17.4	49.13	-	-	-	-	356	387	H
	16.79	36.4	PK2	41.7	-17.4	60.7	-	-	-	-	356	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

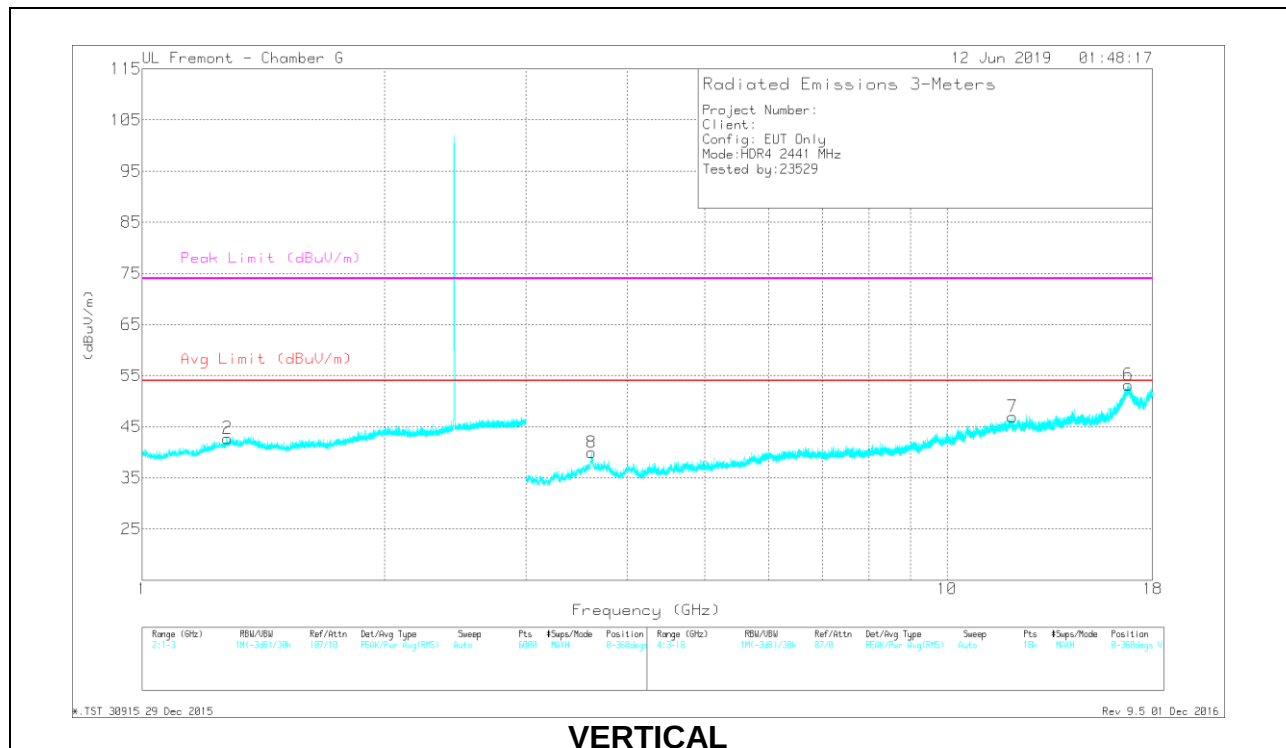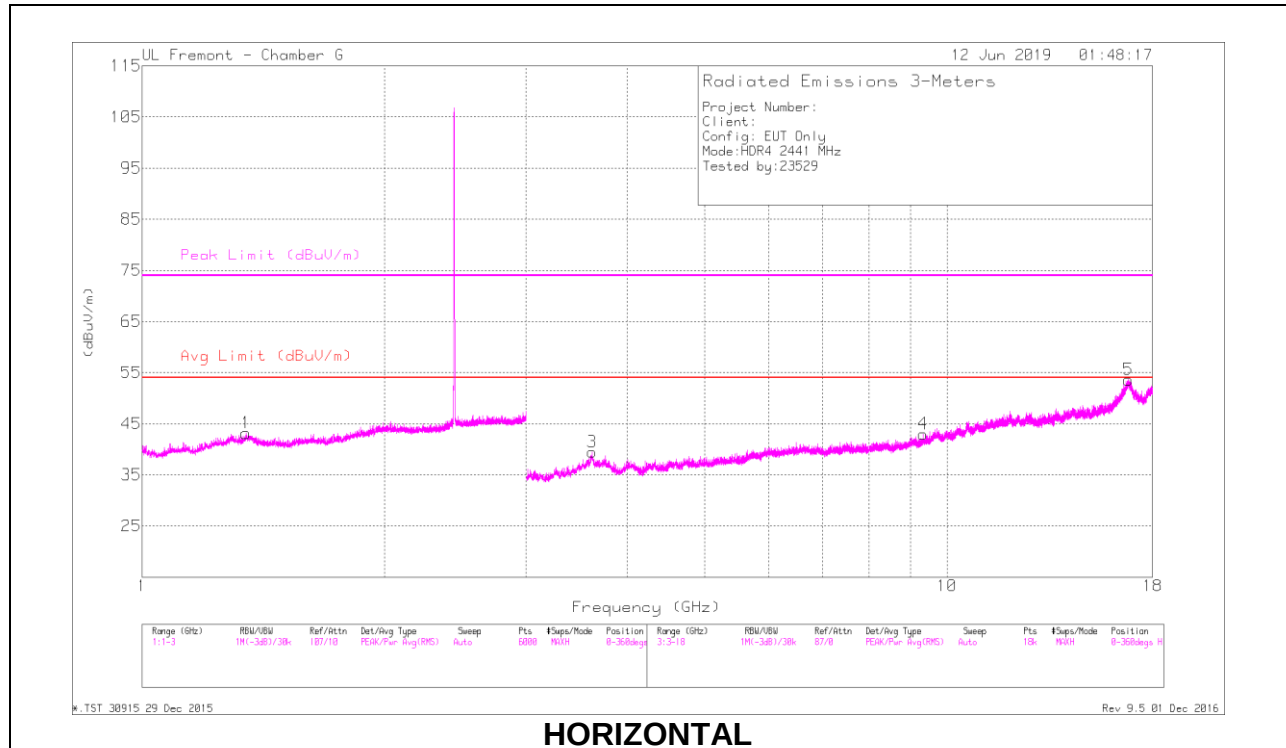

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.345	43.51	PK2	29.8	-23.3	50.01	-	-	74	-23.99	360	100	H
	* 1.346	31.78	MAv1	29.8	-23.3	38.28	54	-15.72	-	-	360	100	H
2	* 1.278	43.85	PK2	29.8	-23.6	50.05	-	-	74	-23.95	360	100	V
	* 1.281	31.95	MAv1	29.7	-23.6	38.05	54	-15.95	-	-	360	100	V
3	* 3.623	40.37	PK2	35.6	-29.9	46.07	-	-	74	-27.93	360	100	H
	* 3.621	29.4	MAv1	35.7	-30	35.1	54	-18.9	-	-	360	100	H
4	* 9.342	38.03	PK2	36.8	-25.2	49.63	-	-	74	-24.37	360	100	H
	* 9.339	26.89	MAv1	36.8	-25.3	38.39	54	-15.61	-	-	360	100	H
7	* 12.062	35.93	PK2	39.5	-23.4	52.03	-	-	74	-21.97	360	100	V
	* 12.063	25.4	MAv1	39.5	-23.4	41.5	54	-12.5	-	-	360	100	V
8	* 3.615	40.64	PK2	35.5	-30.1	46.04	-	-	74	-27.96	360	100	V
	* 3.614	29.61	MAv1	35.5	-30.2	34.91	54	-19.09	-	-	360	100	V
5	16.79	36.53	PK2	41.7	-17.4	60.83	-	-	-	-	3	144	H
	16.793	24.8	MAv1	41.7	-17.4	49.1	-	-	-	-	3	144	H
6	16.793	35.52	PK2	41.7	-17.4	59.82	-	-	-	-	229	259	V
	16.792	24.11	MAv1	41.7	-17.4	48.41	-	-	-	-	229	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

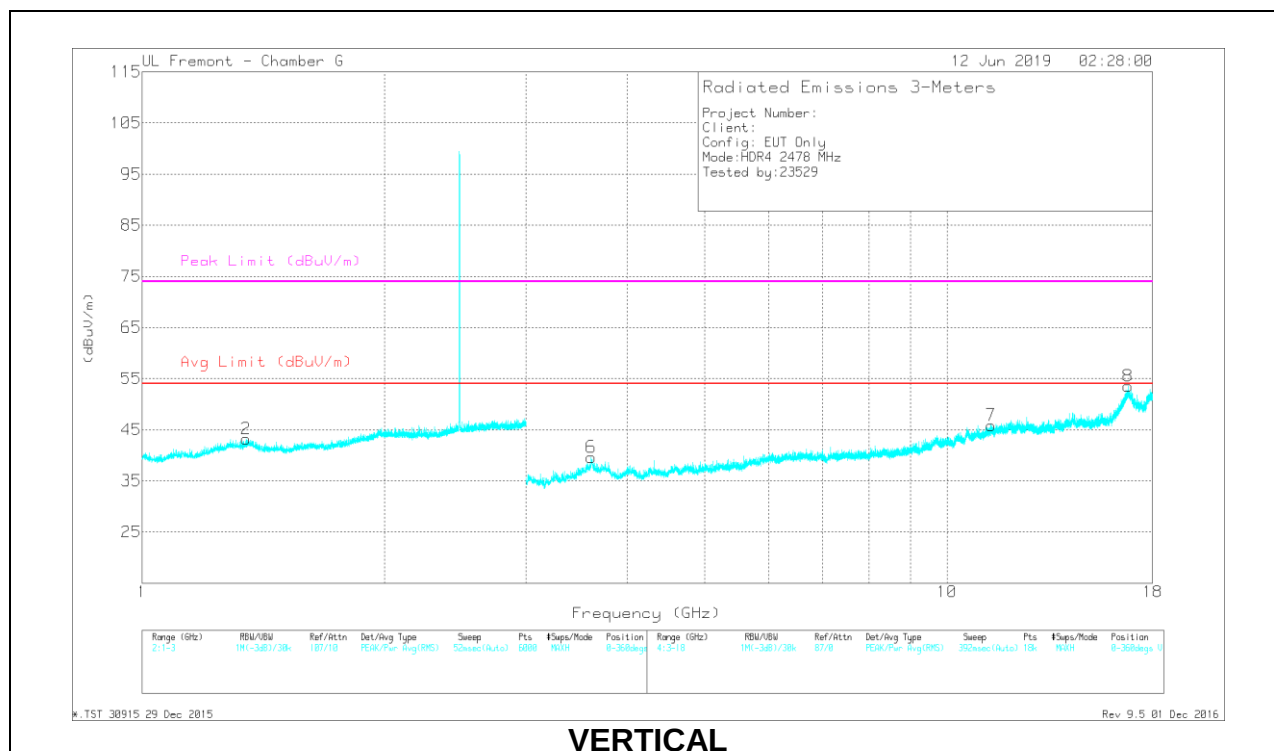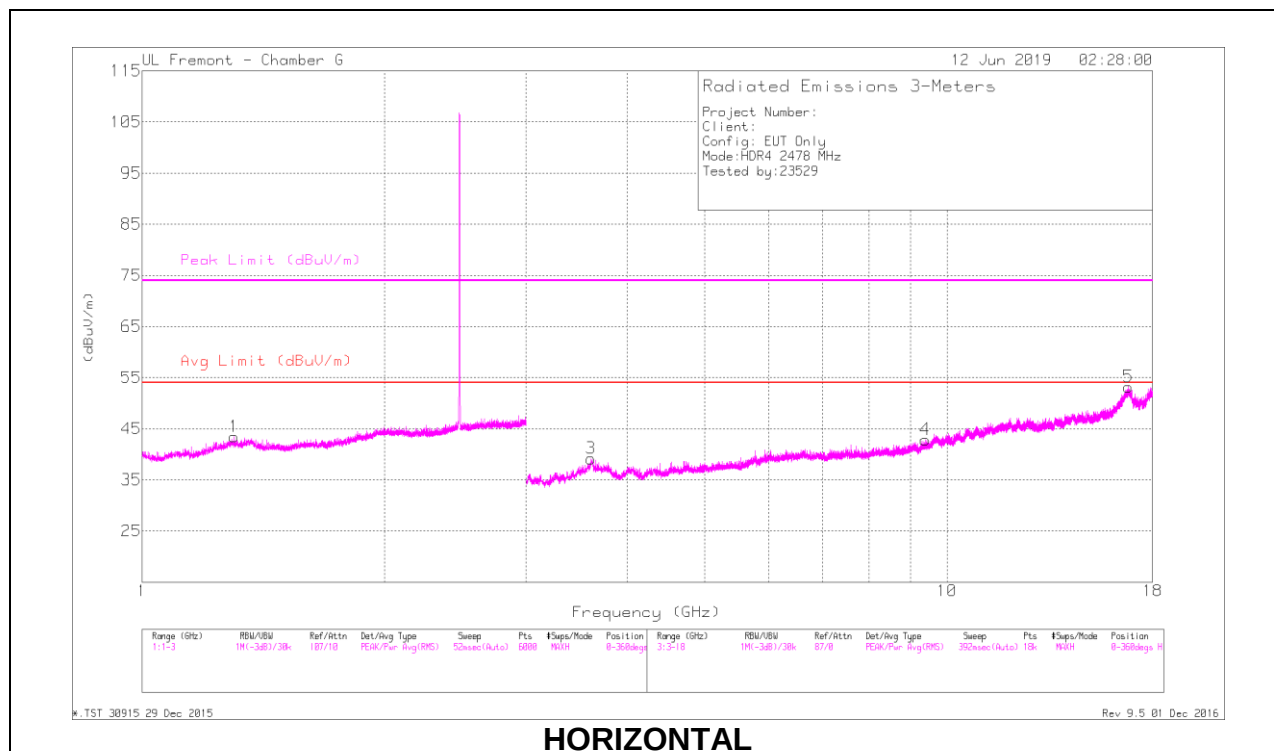

RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.301	43.85	PK2	29.6	-23.5	49.95	-	-	74	-24.05	360	101	H
	* 1.3	32.1	MAv1	29.6	-23.5	38.2	54	-15.8	-	-	360	101	H
2	* 1.344	43.64	PK2	29.8	-23.3	50.14	-	-	74	-23.86	360	101	V
	* 1.345	32.04	MAv1	29.8	-23.3	38.54	54	-15.46	-	-	360	101	V
3	* 3.61	41.17	PK2	35.2	-30.3	46.07	-	-	74	-27.93	360	101	H
	* 3.614	29.82	MAv1	35.4	-30.2	35.02	54	-18.98	-	-	360	101	H
4	* 9.398	37.77	PK2	36.9	-25.4	49.27	-	-	74	-24.73	360	101	H
	* 9.398	26.8	MAv1	36.9	-25.4	38.3	54	-15.7	-	-	360	101	H
6	* 3.614	41.26	PK2	35.5	-30.2	46.56	-	-	74	-27.44	360	101	V
	* 3.615	29.8	MAv1	35.5	-30.1	35.2	54	-18.8	-	-	360	101	V
7	* 11.347	36.47	PK2	38.7	-22.4	52.77	-	-	74	-21.23	360	101	V
	* 11.347	25.17	MAv1	38.7	-22.4	41.47	54	-12.53	-	-	360	101	V
8	16.784	36.42	PK2	41.7	-17.5	60.62	-	-	-	-	14	164	V
	16.784	24.45	MAv1	41.7	-17.5	48.65	-	-	-	-	14	164	V
5	16.8	36.34	PK2	41.8	-17.5	60.64	-	-	-	-	12	183	H
	16.8	24.9	MAv1	41.8	-17.5	49.2	-	-	-	-	12	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.2. HIGH POWER HDR (HDR8)

Antenna 4

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

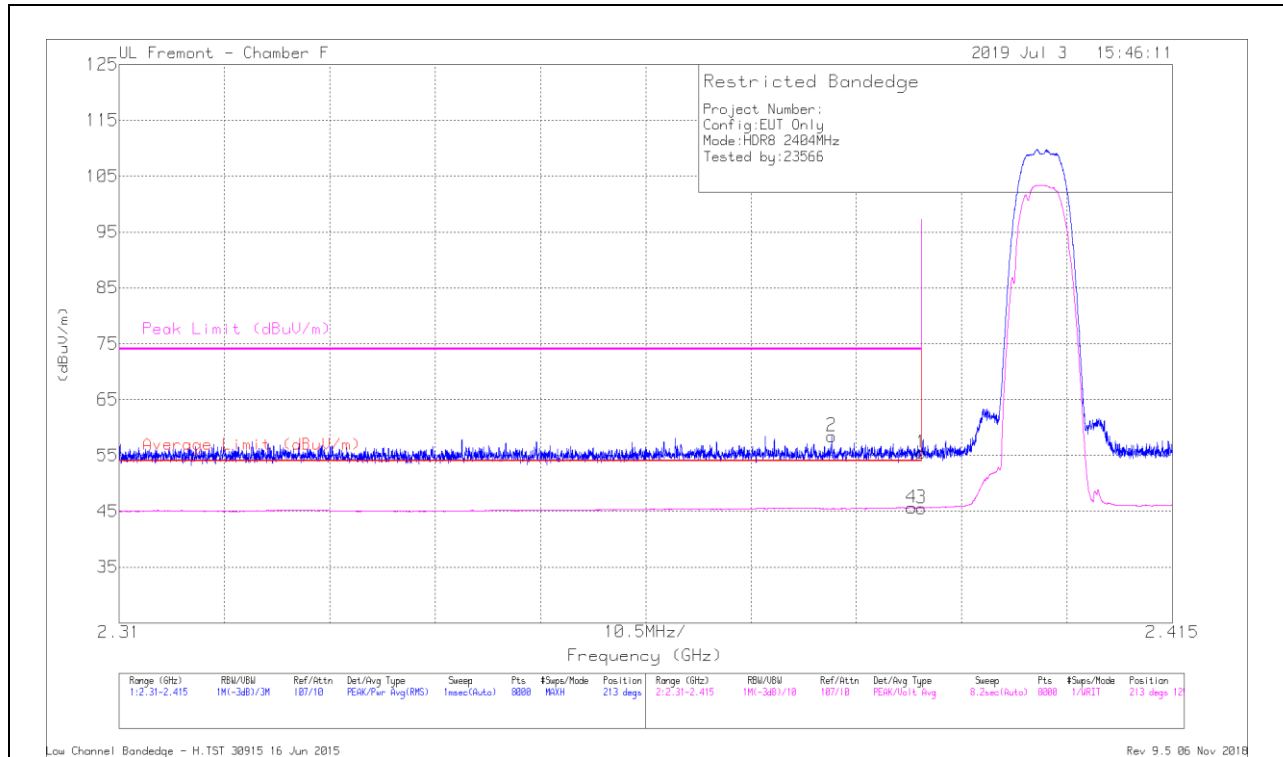


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	AmplCbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.98	Pk	32	-14.5	55.48	-	-	74	-18.52	213	125	H
2	* 2.381	41.07	Pk	31.9	-14.5	58.47	-	-	74	-15.53	213	125	H
3	* 2.39	28.07	VA1T	32	-14.5	45.57	54	-8.43	-	-	213	125	H
4	* 2.389	28.15	VA1T	32	-14.5	45.65	54	-8.35	-	-	213	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

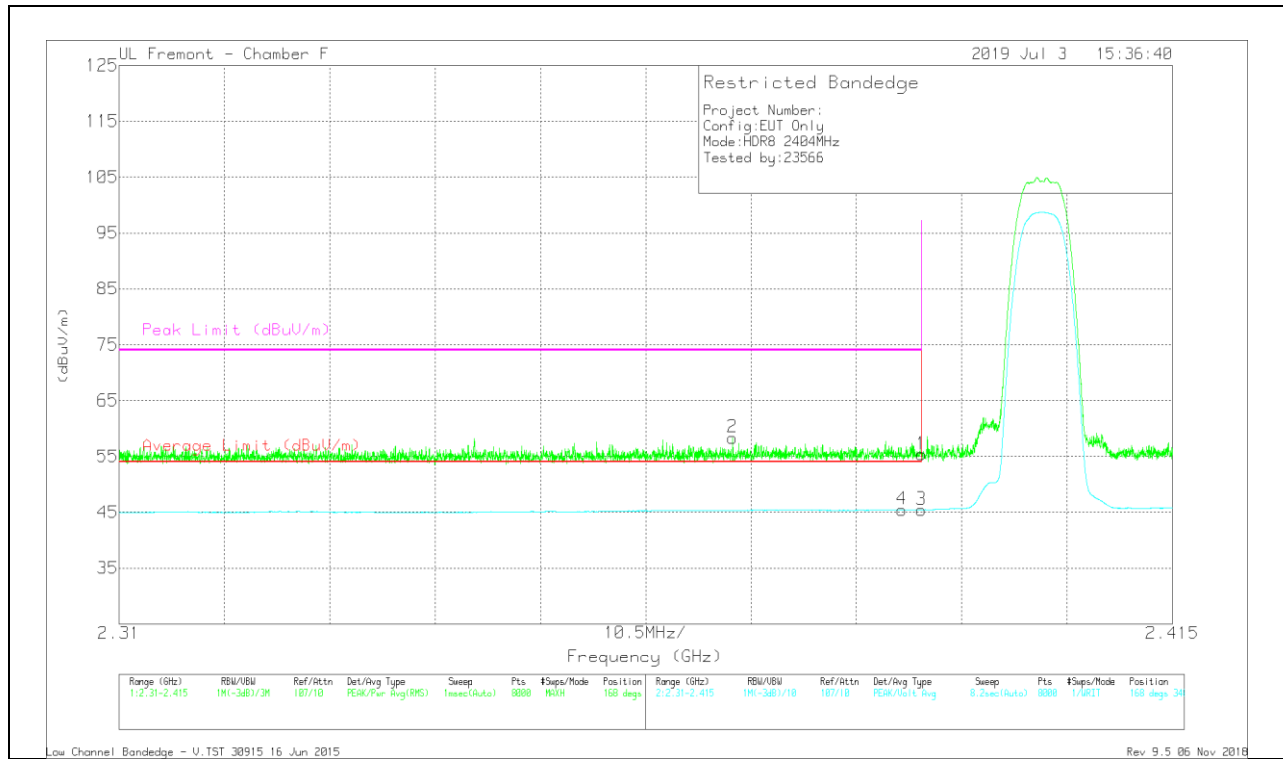

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbll/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.88	Pk	32	-14.5	55.38	-	-	74	-18.62	168	340	V
2	* 2.371	40.96	Pk	31.9	-14.5	58.36	-	-	74	-15.64	168	340	V
3	* 2.39	27.93	VA1T	32	-14.5	45.43	54	-8.57	-	-	168	340	V
4	* 2.388	27.97	VA1T	32	-14.5	45.47	54	-8.53	-	-	168	340	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

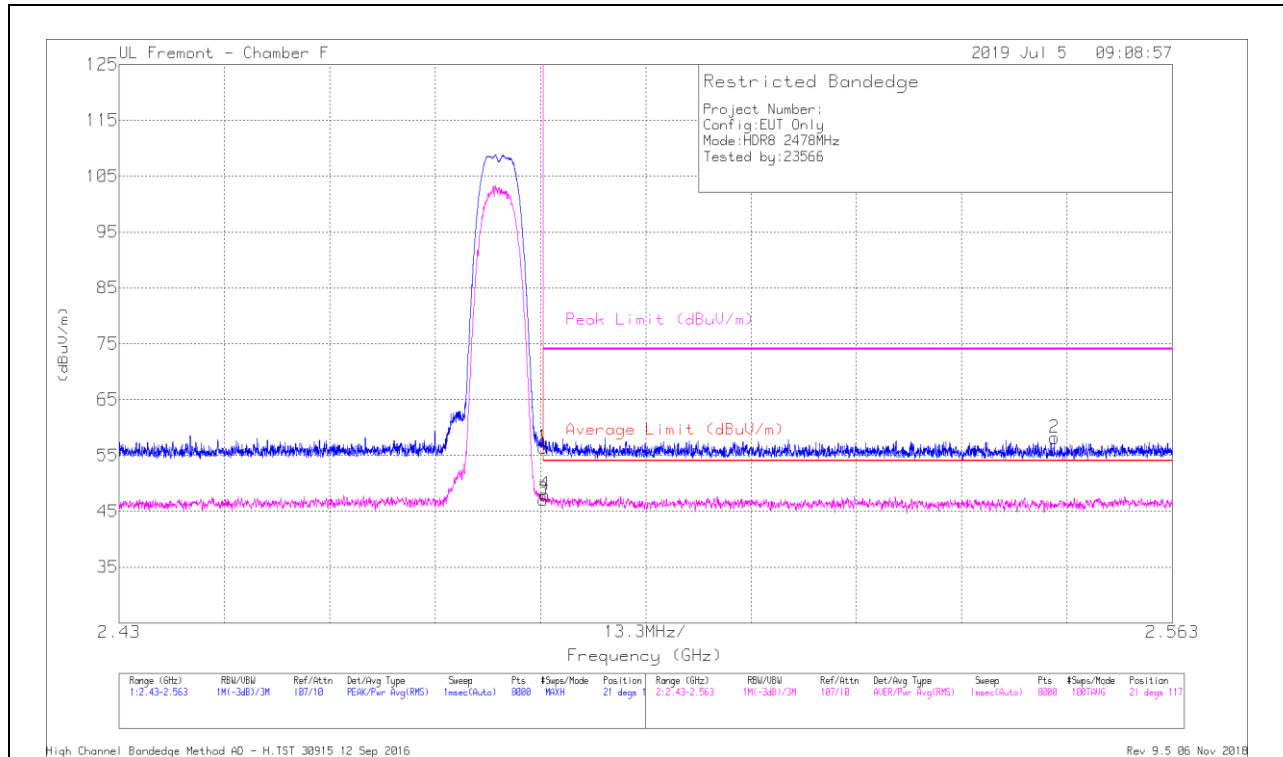

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.74	Pk	32.4	-14.7	56.44	-	-	74	-17.56	21	117	H
2	2.548	40.55	Pk	32.3	-14.7	58.15	-	-	74	-15.85	21	117	H
3	* 2.484	29.33	RMS	32.4	-14.7	47.03	54	-6.97	-	-	21	117	H
4	* 2.484	30.29	RMS	32.4	-14.7	47.99	54	-6.01	-	-	21	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

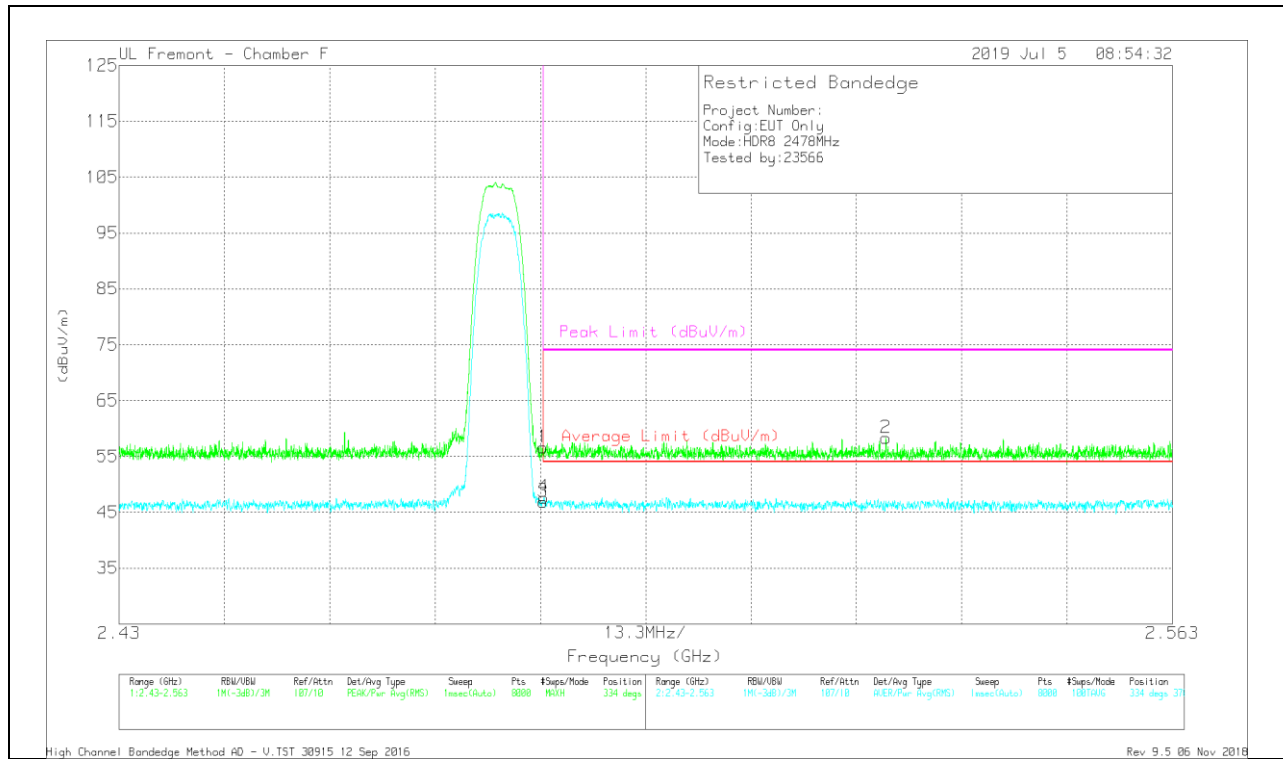

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.9	Pk	32.4	-14.7	56.6	-	-	74	-17.4	334	370	V
2	2.527	40.59	Pk	32.4	-14.7	58.29	-	-	74	-15.71	334	370	V
3	* 2.484	29.17	RMS	32.4	-14.7	46.87	54	-7.13	-	-	334	370	V
4	* 2.484	29.95	RMS	32.4	-14.7	47.65	54	-6.35	-	-	334	370	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

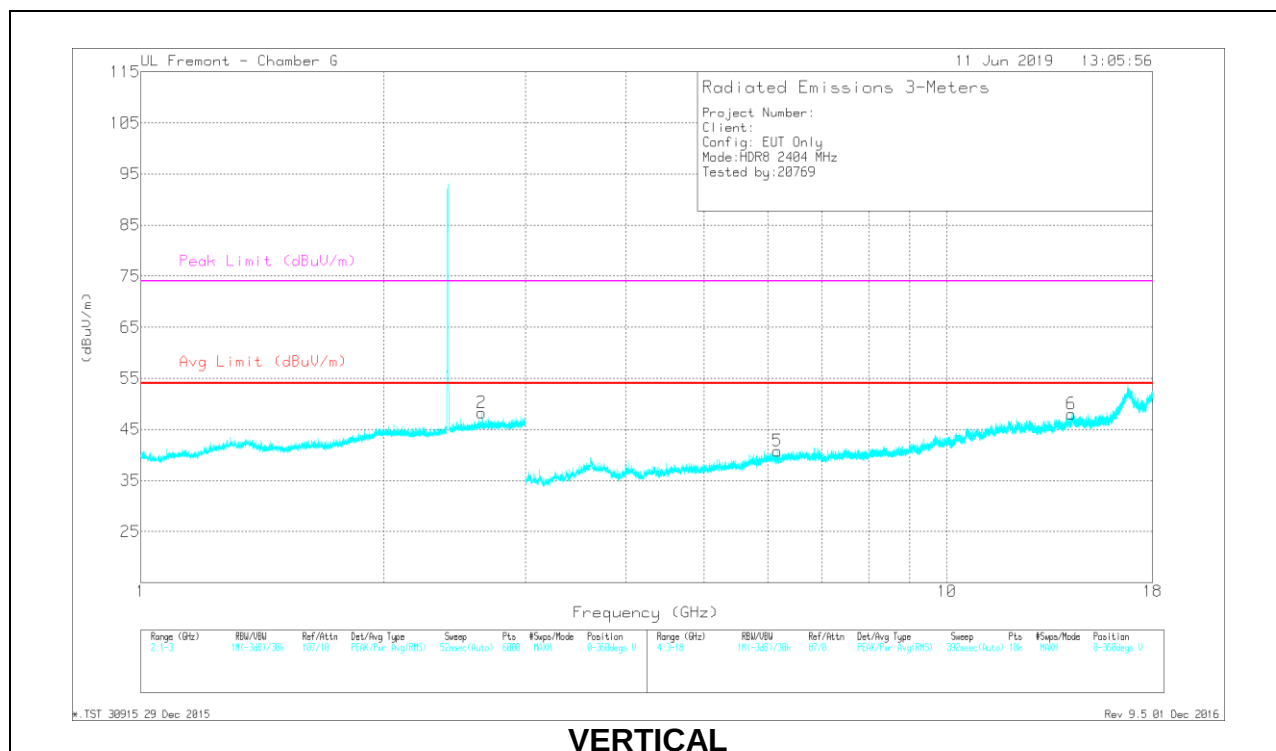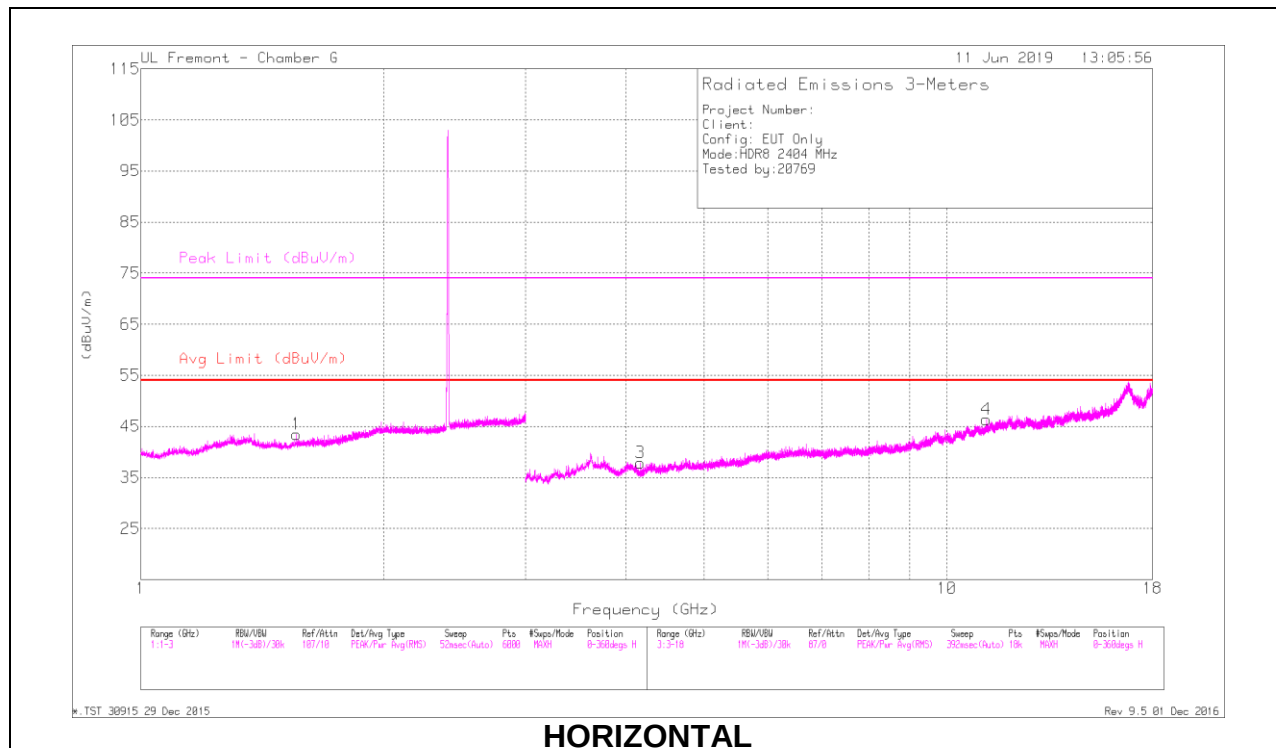

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.561	43.68	PK2	27.8	-21.4	50.08	-	-	74	-23.92	208	259	H
	* 1.559	31.41	MAv1	27.8	-21.4	37.81	54	-16.19	-	-	208	259	H
3	* 4.167	41.01	PK2	33.5	-30.4	44.11	-	-	74	-29.89	347	384	H
	* 4.167	29.11	MAv1	33.5	-30.4	32.21	54	-21.79	-	-	347	384	H
4	* 11.196	37.28	PK2	38.5	-23	52.78	-	-	74	-21.22	101	380	H
	* 11.193	25.1	MAv1	38.4	-23	40.5	54	-13.5	-	-	101	380	H
2	2.648	43.18	PK2	32.6	-21.9	53.88	-	-	-	-	250	316	V
5	6.157	41.26	PK2	35.7	-29.6	47.36	-	-	-	-	172	143	V
6	14.262	36.84	PK2	39.9	-22.9	53.84	-	-	-	-	40	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

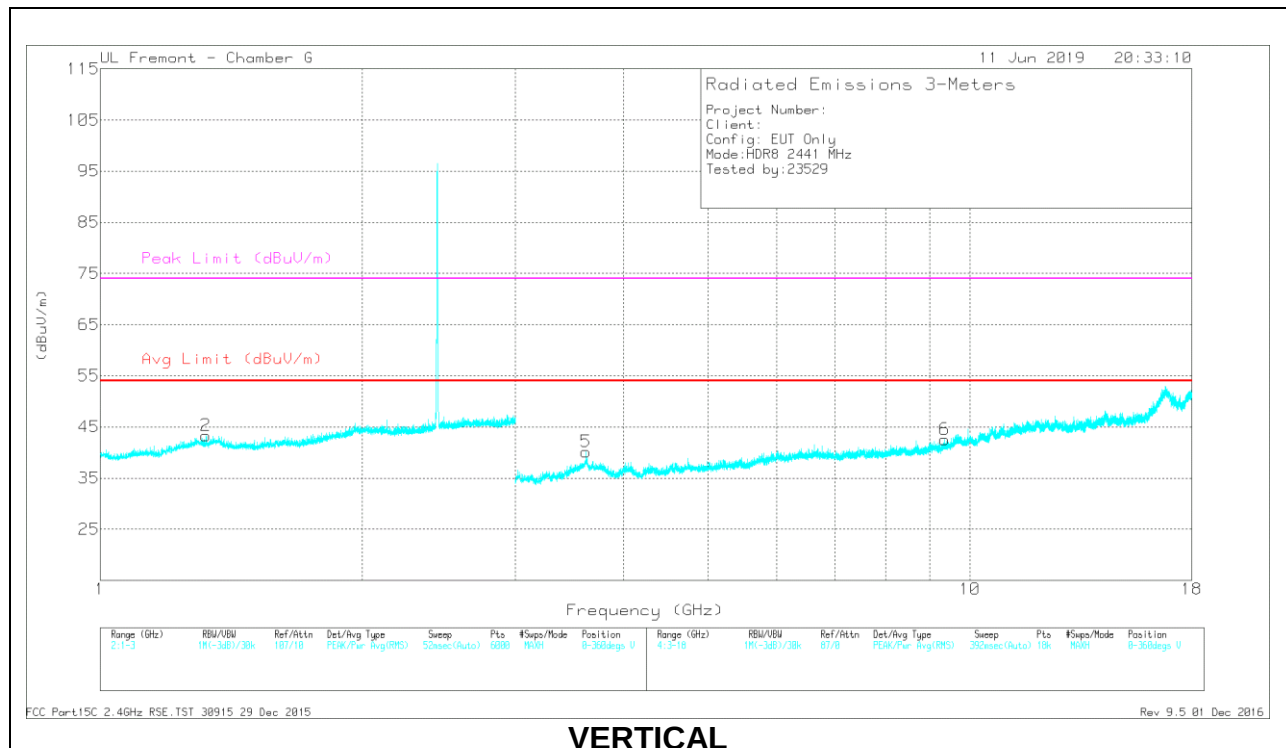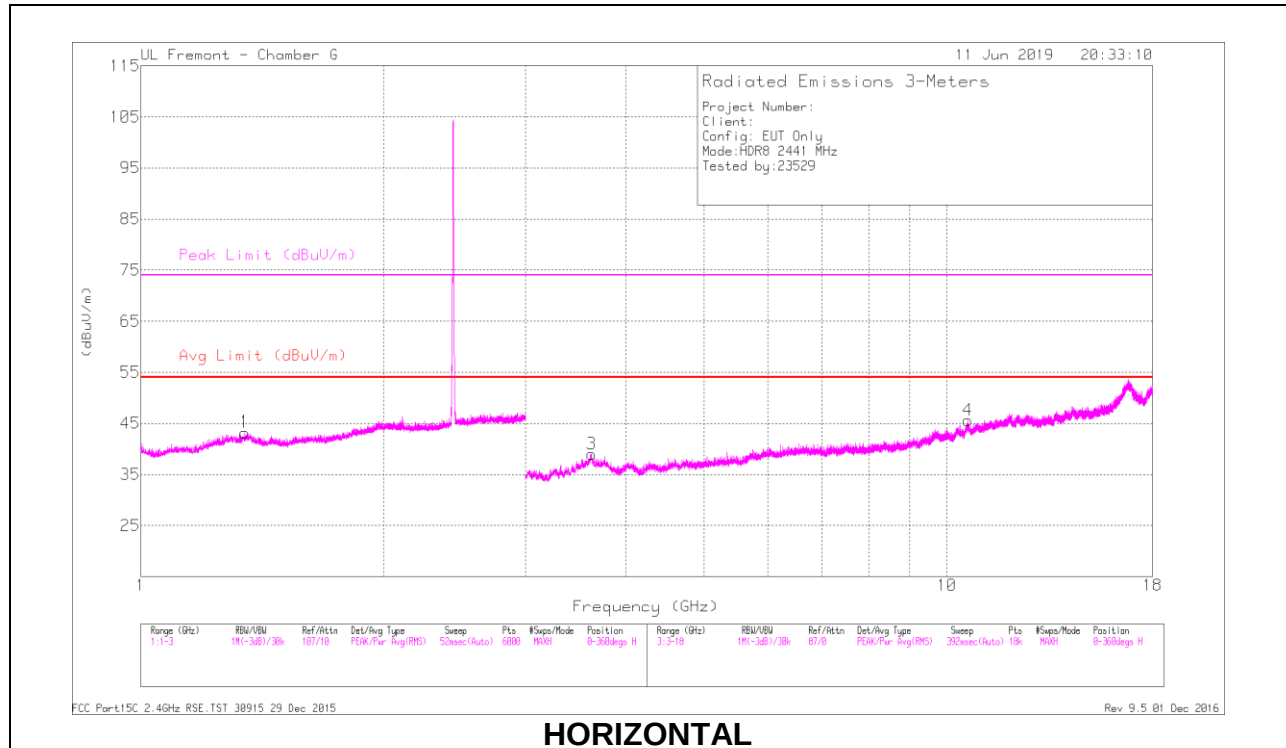

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.346	43.82	PK2	29.8	-23.3	50.32	-	-	74	-23.68	58	169	H
	* 1.346	31.97	MAv1	29.8	-23.3	38.47	54	-15.53	-	-	58	169	H
2	* 1.323	43.77	PK2	29.8	-23.5	50.07	-	-	74	-23.93	212	115	V
	* 1.324	31.85	MAv1	29.8	-23.5	38.15	54	-15.85	-	-	212	115	V
3	* 3.625	40.64	PK2	35.5	-29.8	46.34	-	-	74	-27.66	185	181	H
	* 3.626	29.44	MAv1	35.4	-29.8	35.04	54	-18.96	-	-	185	181	H
4	* 10.63	36.88	PK2	38.1	-23.1	51.88	-	-	74	-22.12	201	221	H
	* 10.627	25.89	MAv1	38.2	-23.2	40.89	54	-13.11	-	-	201	221	H
5	* 3.62	40.95	PK2	35.7	-30	46.65	-	-	74	-27.35	126	172	V
	* 3.62	29.5	MAv1	35.7	-30	35.2	54	-18.8	-	-	126	172	V
6	* 9.355	38.18	PK2	36.8	-25.3	49.68	-	-	74	-24.32	97	191	V
	* 9.357	26.49	MAv1	36.8	-25.3	37.99	54	-16.01	-	-	97	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

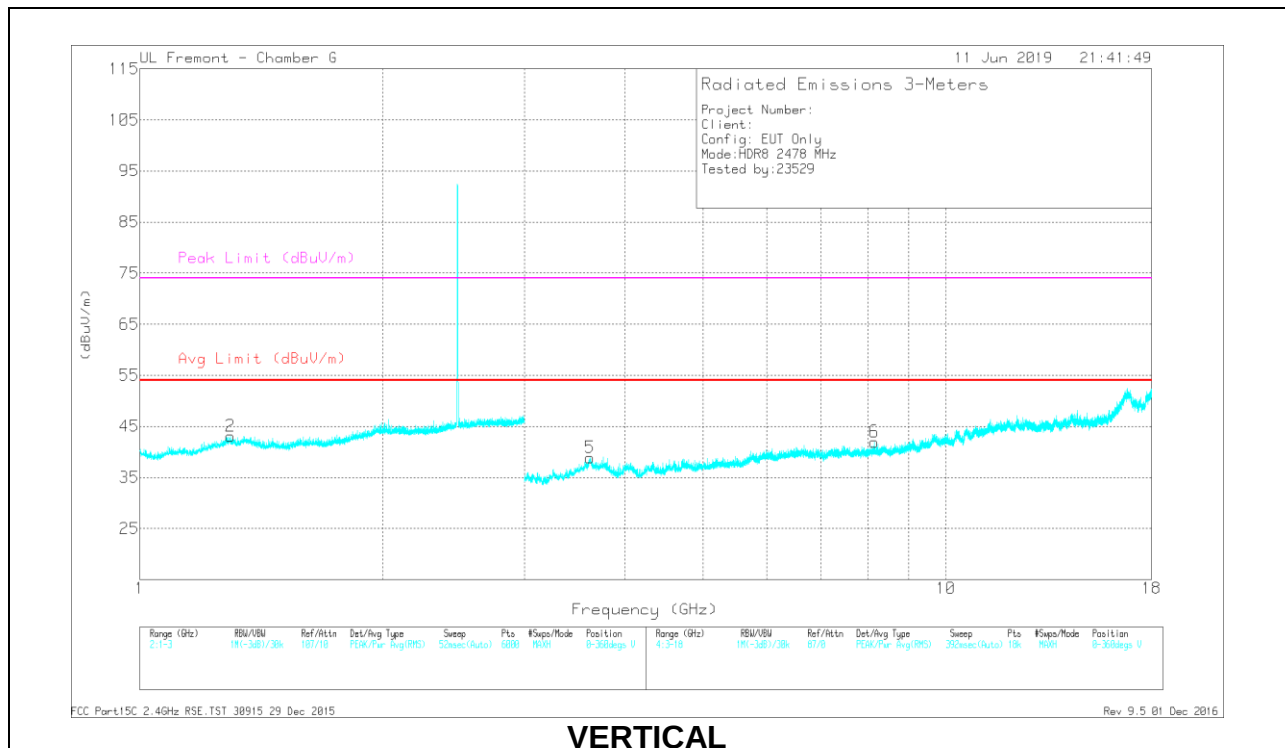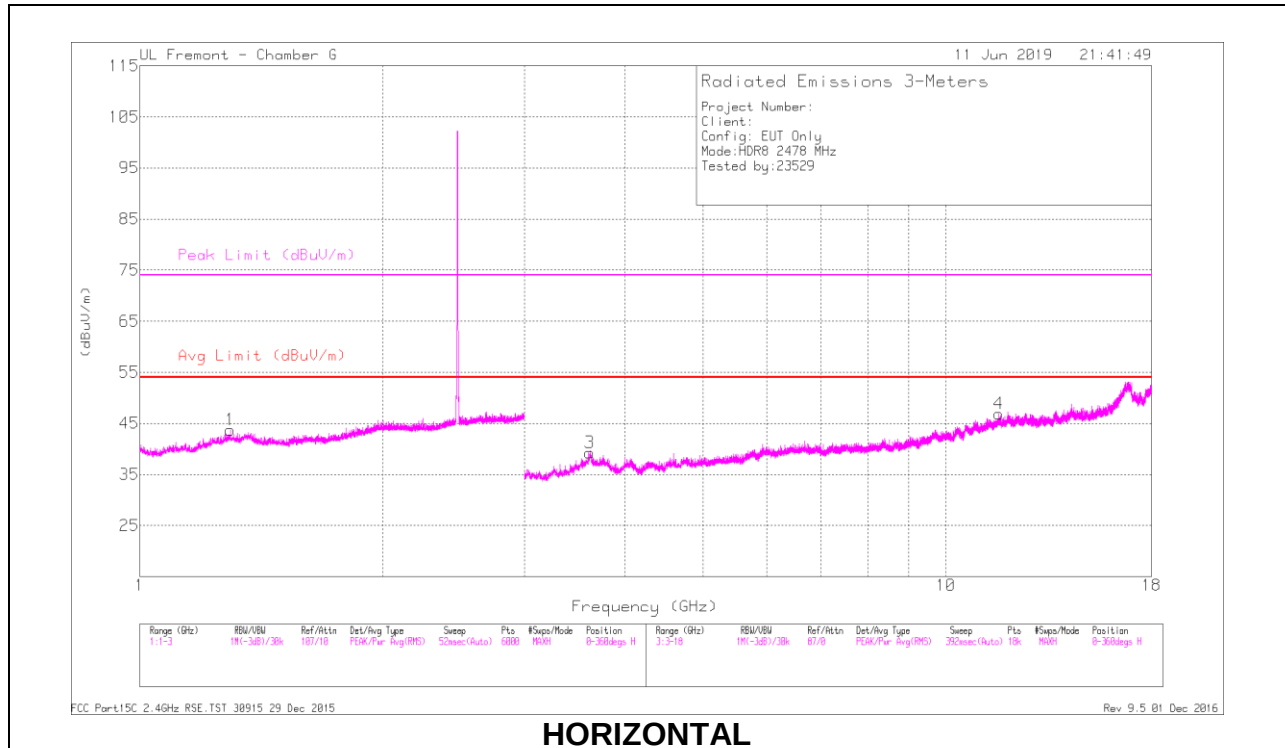

RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.295	43.79	PK2	29.9	-23.5	50.19	-	-	74	-23.81	241	157	H
	* 1.294	32.07	MAv1	29.9	-23.5	38.47	54	-15.53	-	-	241	157	H
2	* 1.296	43.42	PK2	29.8	-23.5	49.72	-	-	74	-24.28	198	223	V
	* 1.298	31.93	MAv1	29.7	-23.5	38.13	54	-15.87	-	-	198	223	V
3	* 3.614	40.93	PK2	35.5	-30.2	46.23	-	-	74	-27.77	74	121	H
	* 3.614	29.59	MAv1	35.5	-30.2	34.89	54	-19.11	-	-	74	121	H
4	* 11.631	36.45	PK2	39.2	-22.5	53.15	-	-	74	-20.85	124	187	H
	* 11.628	25.36	MAv1	39.2	-22.4	42.16	54	-11.84	-	-	124	187	H
5	* 3.619	40.81	PK2	35.7	-30	46.51	-	-	74	-27.49	217	208	V
	* 3.62	29.49	MAv1	35.7	-30	35.19	54	-18.81	-	-	217	208	V
6	* 8.159	37.65	PK2	36.1	-26.4	47.35	-	-	74	-26.65	19	113	V
	* 8.156	26.71	MAv1	36.1	-26.4	36.41	54	-17.59	-	-	19	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

Antenna 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

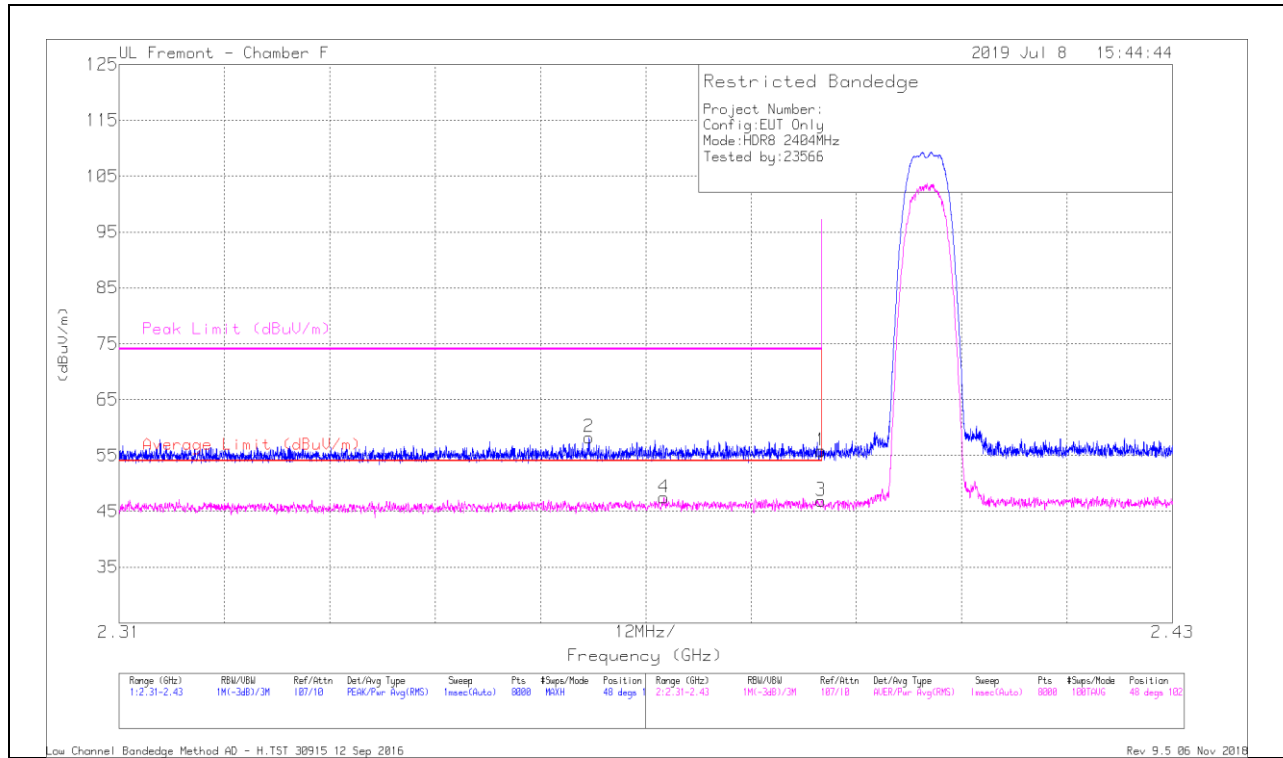


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.32	Pk	32	-14.5	55.82	-	-	74	-18.18	48	102	H
2	* 2.364	40.84	Pk	31.8	-14.4	58.24	-	-	74	-15.76	48	102	H
3	* 2.39	29.4	RMS	32	-14.5	46.9	54	-7.1	-	-	48	102	H
4	* 2.372	29.97	RMS	31.9	-14.4	47.47	54	-6.53	-	-	48	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

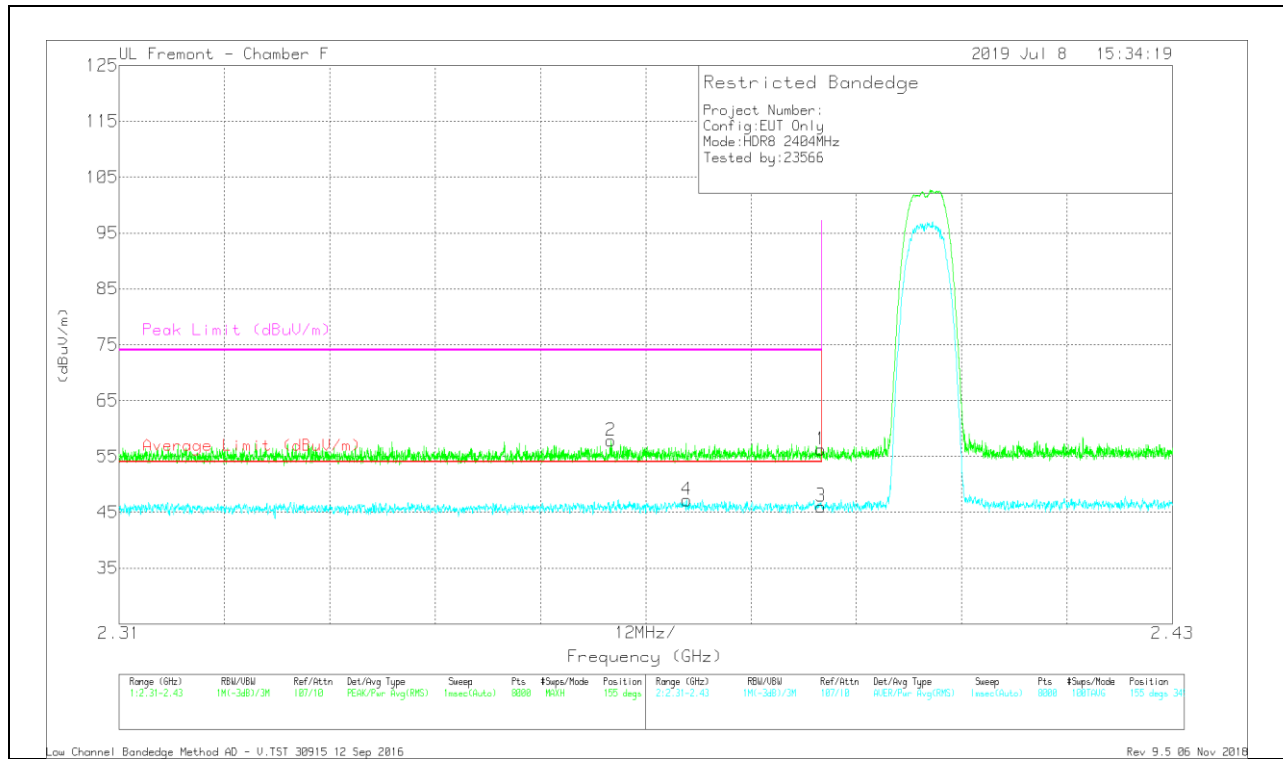

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.71	Pk	32	-14.5	56.21	-	-	74	-17.79	155	345	V
2	* 2.366	40.39	Pk	31.8	-14.4	57.79	-	-	74	-16.21	155	345	V
3	* 2.39	28.52	RMS	32	-14.5	46.02	54	-7.98	-	-	155	345	V
4	* 2.375	29.7	RMS	31.9	-14.4	47.2	54	-6.8	-	-	155	345	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

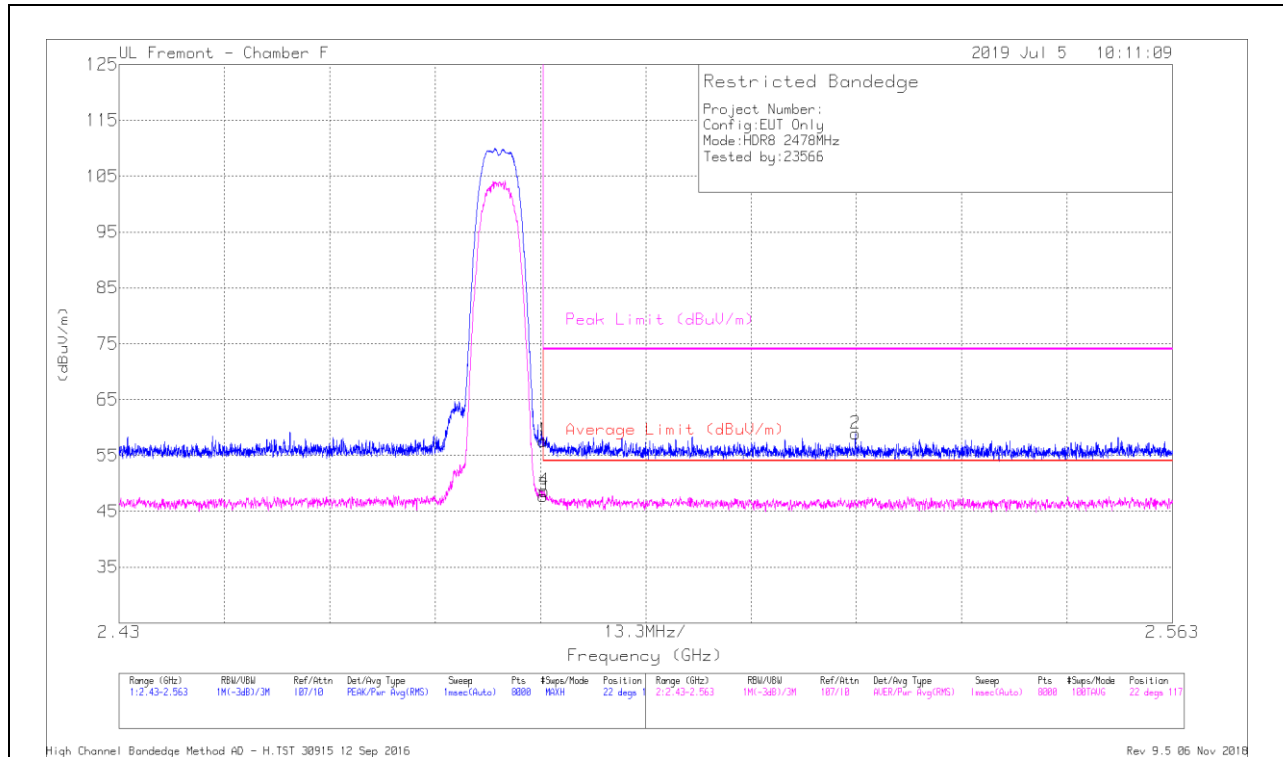


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.93	Pk	32.4	-14.7	57.63	-	-	74	-16.37	22	117	H
2	2.523	41.1	Pk	32.3	-14.5	58.9	-	-	74	-15.1	22	117	H
3	* 2.484	30.04	RMS	32.4	-14.7	47.74	54	-6.26	-	-	22	117	H
4	* 2.484	30.94	RMS	32.4	-14.7	48.64	54	-5.36	-	-	22	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

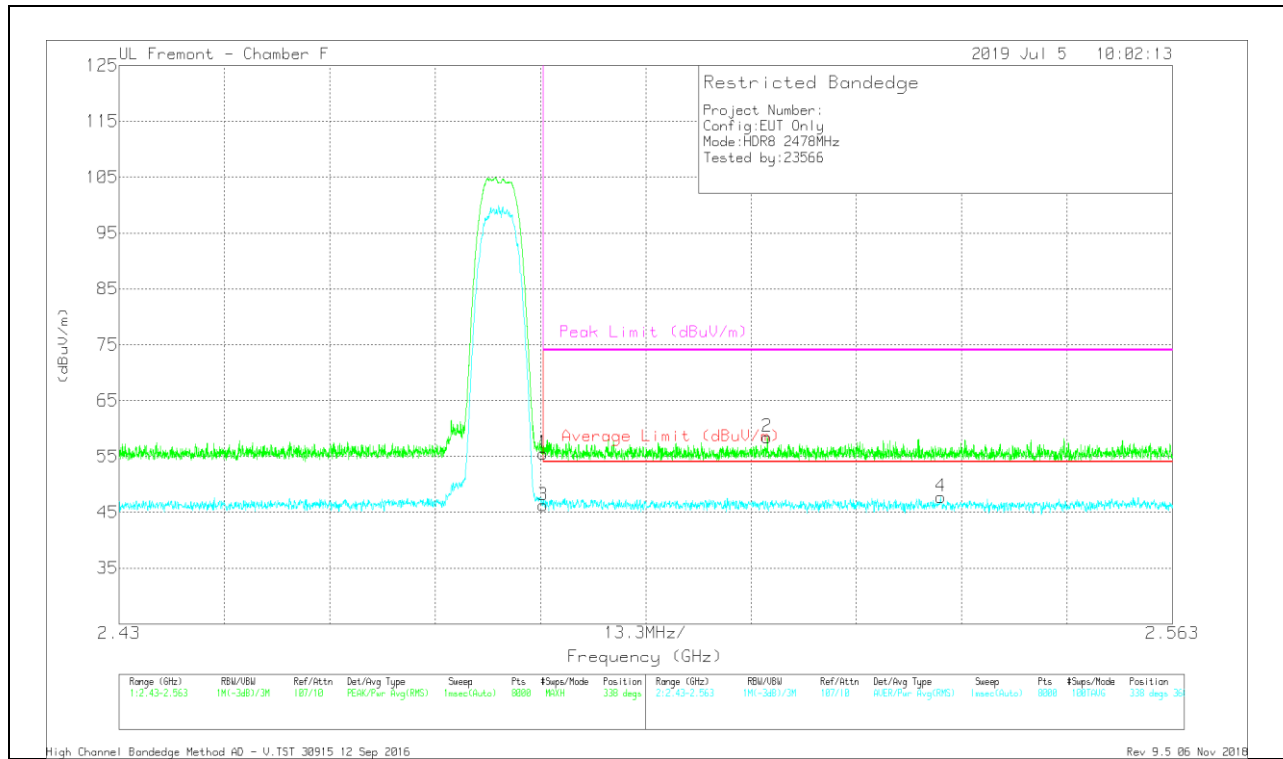

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.86	Pk	32.4	-14.7	55.56	-	-	74	-18.44	338	366	V
2	2.512	40.78	Pk	32.4	-14.7	58.48	-	-	74	-15.52	338	366	V
3	* 2.484	28.55	RMS	32.4	-14.7	46.25	54	-7.75	-	-	338	366	V
4	2.534	30.18	RMS	32.3	-14.7	47.78	54	-6.22	-	-	338	366	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

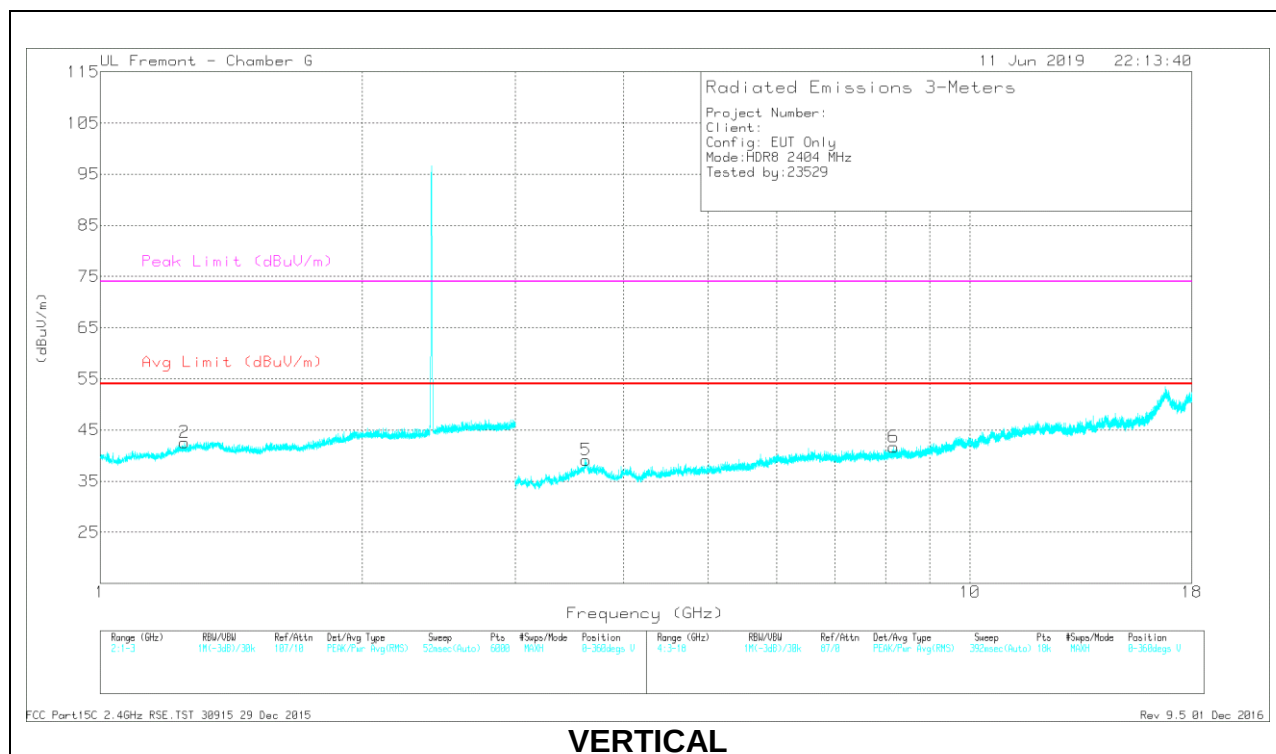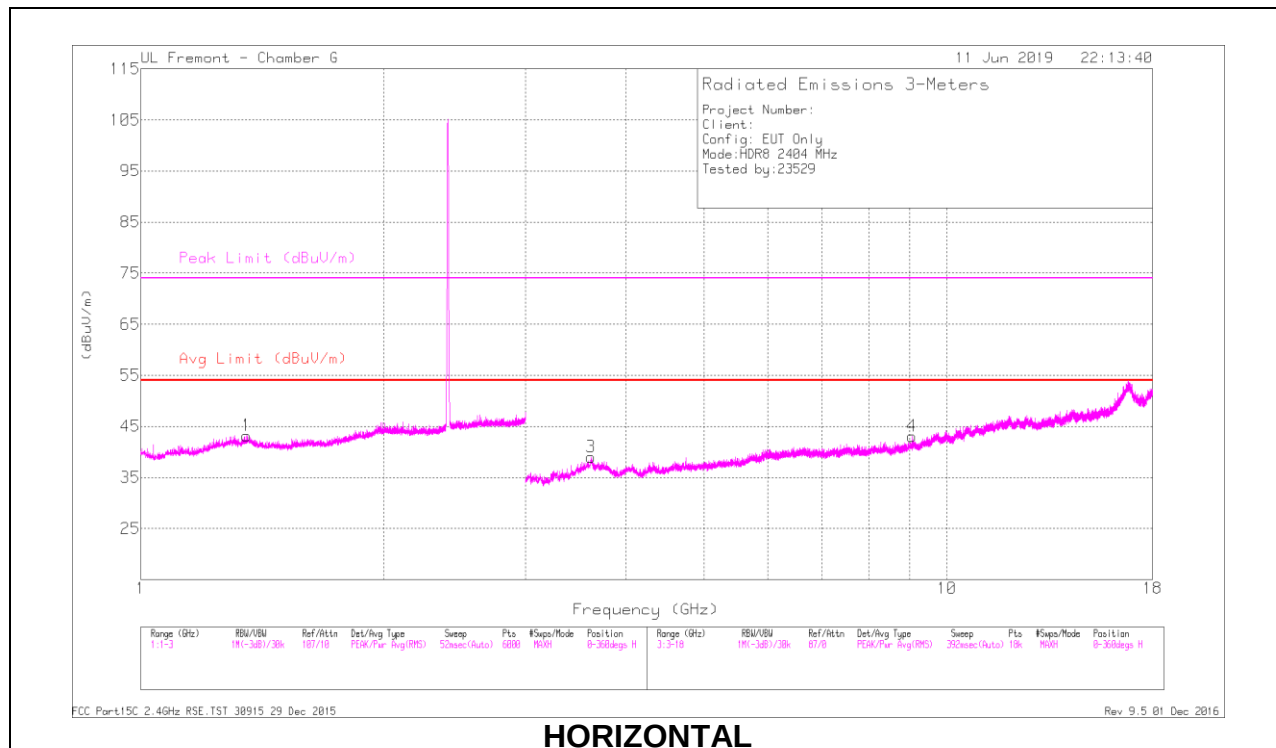

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.354	44.02	PK2	30	-23.3	50.72	-	-	74	-23.28	158	201	H
	* 1.353	31.78	MAv1	30	-23.3	38.48	54	-15.52	-	-	158	201	H
2	* 1.251	43.62	PK2	29.2	-23.7	49.12	-	-	74	-24.88	75	188	V
	* 1.249	32.02	MAv1	29.2	-23.6	37.62	54	-16.38	-	-	75	188	V
3	* 3.62	40.8	PK2	35.7	-30	46.5	-	-	74	-27.5	142	192	H
	* 3.617	29.52	MAv1	35.7	-30.1	35.12	54	-18.88	-	-	142	192	H
4	* 9.052	37.87	PK2	36.5	-25.3	49.07	-	-	74	-24.93	212	237	H
	* 9.052	26.43	MAv1	36.5	-25.3	37.63	54	-16.37	-	-	212	237	H
5	* 3.623	40.57	PK2	35.6	-29.9	46.27	-	-	74	-27.73	186	107	V
	* 3.621	29.44	MAv1	35.7	-30	35.14	54	-18.86	-	-	186	107	V
6	* 8.173	38.17	PK2	36.1	-26.5	47.77	-	-	74	-26.23	312	161	V
	* 8.176	27.12	MAv1	36.1	-26.5	36.72	54	-17.28	-	-	312	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

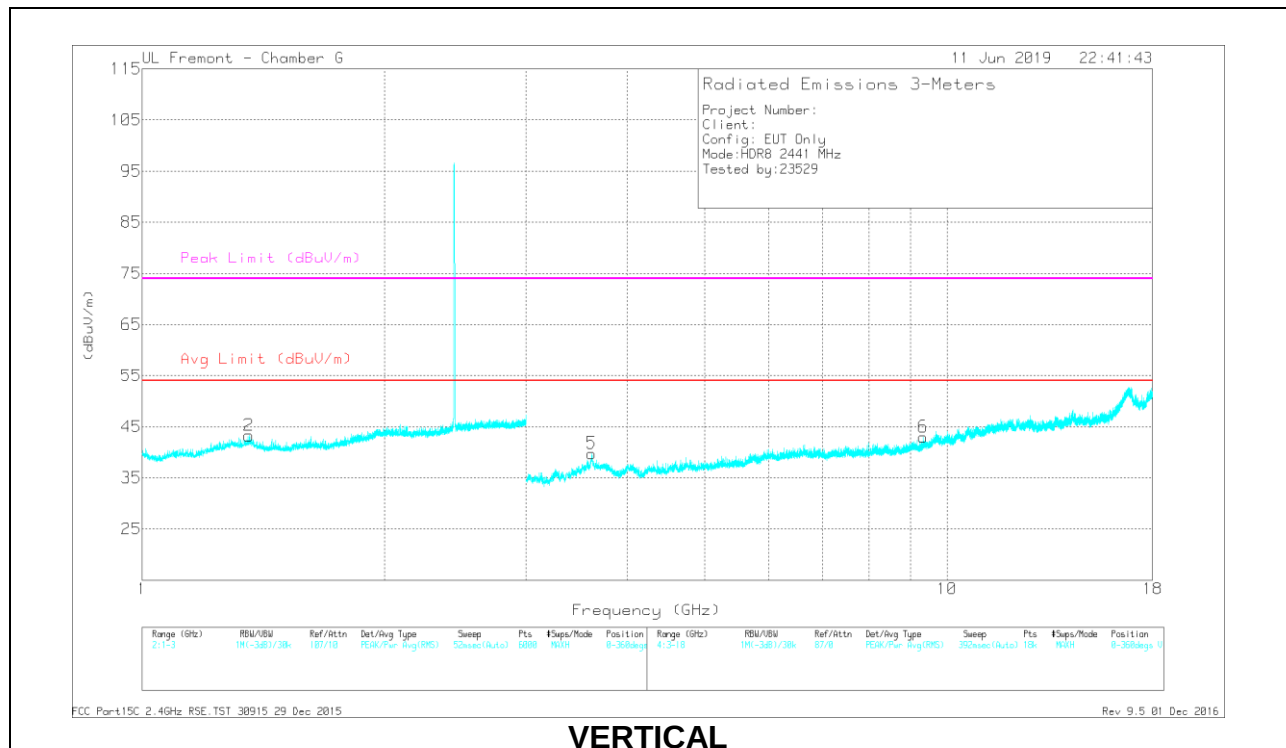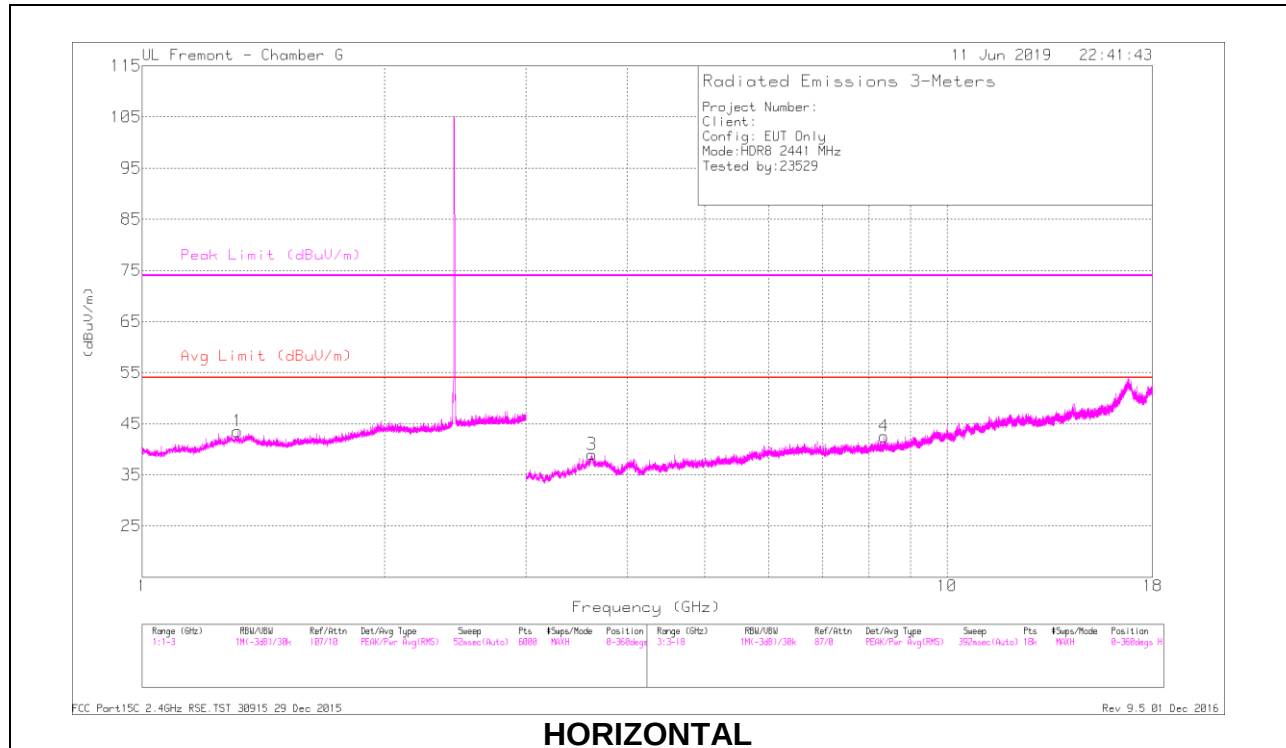

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.312	43.07	PK2	29.7	-23.5	49.27	-	-	74	-24.73	28	112	H
	* 1.313	31.79	MAv1	29.7	-23.5	37.99	54	-16.01	-	-	28	112	H
2	* 1.355	43.44	PK2	30	-23.3	50.14	-	-	74	-23.86	245	187	V
	* 1.355	32.03	MAv1	30	-23.3	38.73	54	-15.27	-	-	245	187	V
3	* 3.621	40.95	PK2	35.7	-30	46.65	-	-	74	-27.35	219	201	H
	* 3.619	29.64	MAv1	35.7	-30.1	35.24	54	-18.76	-	-	219	201	H
4	* 8.355	38.75	PK2	36.1	-26.4	48.45	-	-	74	-25.55	97	110	H
	* 8.354	27.74	MAv1	36.1	-26.4	37.44	54	-16.56	-	-	97	110	H
5	* 3.617	40.83	PK2	35.6	-30.1	46.33	-	-	74	-27.67	122	136	V
	* 3.619	29.54	MAv1	35.7	-30	35.24	54	-18.76	-	-	122	136	V
6	* 9.344	37.07	PK2	36.8	-25.2	48.67	-	-	74	-25.33	269	215	V
	* 9.346	26.6	MAv1	36.8	-25.2	38.2	54	-15.8	-	-	269	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

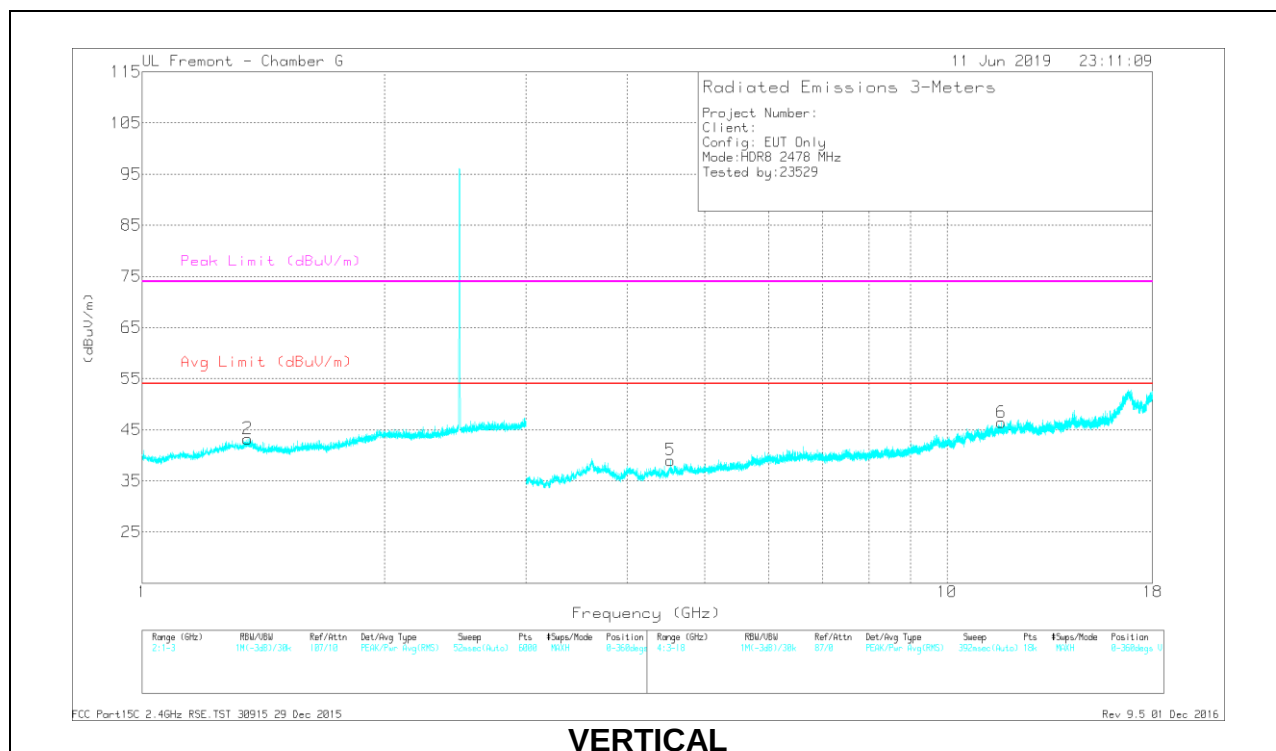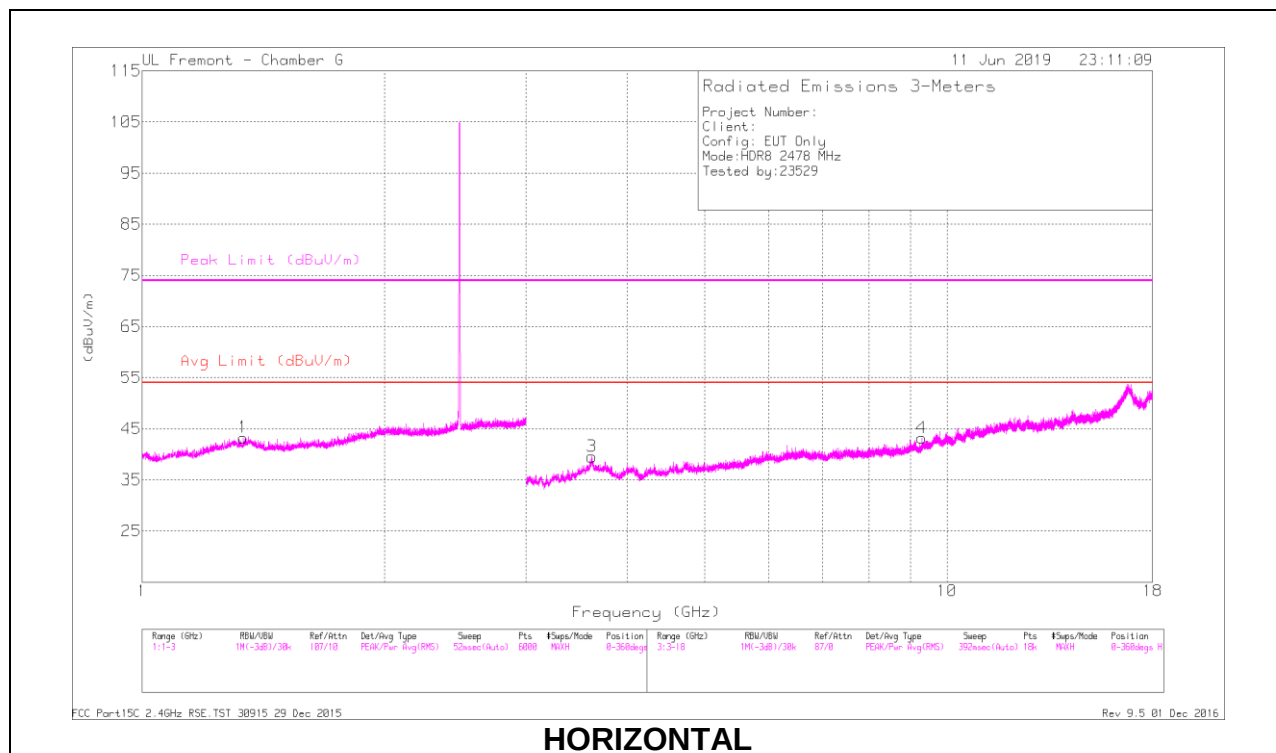

RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.336	43.28	PK2	29.8	-23.3	49.78	-	-	74	-24.22	93	112	H
	* 1.334	31.78	MAv1	29.7	-23.3	38.18	54	-15.82	-	-	93	112	H
2	* 1.352	43.82	PK2	30	-23.3	50.52	-	-	74	-23.48	127	132	V
	* 1.354	31.71	MAv1	30	-23.3	38.41	54	-15.59	-	-	127	132	V
3	* 3.619	40.99	PK2	35.7	-30.1	46.59	-	-	74	-27.41	255	191	H
	* 3.618	29.41	MAv1	35.7	-30.1	35.01	54	-18.99	-	-	255	191	H
5	* 4.533	40.91	PK2	34.1	-29.9	45.11	-	-	74	-28.89	237	208	V
	* 4.533	29.37	MAv1	34.1	-29.9	33.57	54	-20.43	-	-	237	208	V
6	* 11.677	36.6	PK2	39.2	-22.8	53	-	-	74	-21	46	223	V
	* 11.679	25.24	MAv1	39.2	-22.8	41.64	54	-12.36	-	-	46	223	V
4	9.531	38.78	PK2	37.3	-26	50.08	-	-	-	-	76	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.3. LOW POWER HDR (HDR4)

Antenna 4

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

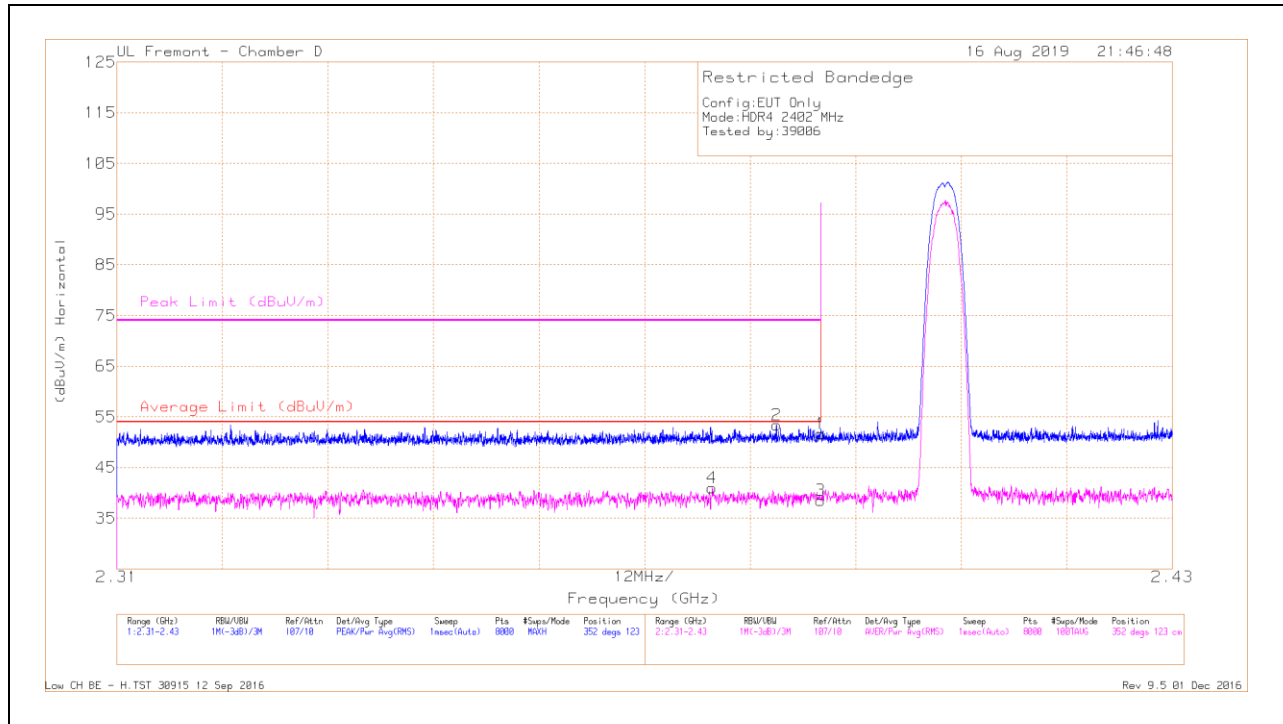


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.21	Pk	32	-20.6	51.61	-	-	74	-22.39	352	123	H
2	* 2.385	42.09	Pk	32	-20.7	53.39	-	-	74	-20.61	352	123	H
3	* 2.39	27.05	RMS	32	-20.6	38.45	54	-15.55	-	-	352	123	H
4	* 2.378	29.66	RMS	31.9	-20.6	40.96	54	-13.04	-	-	352	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

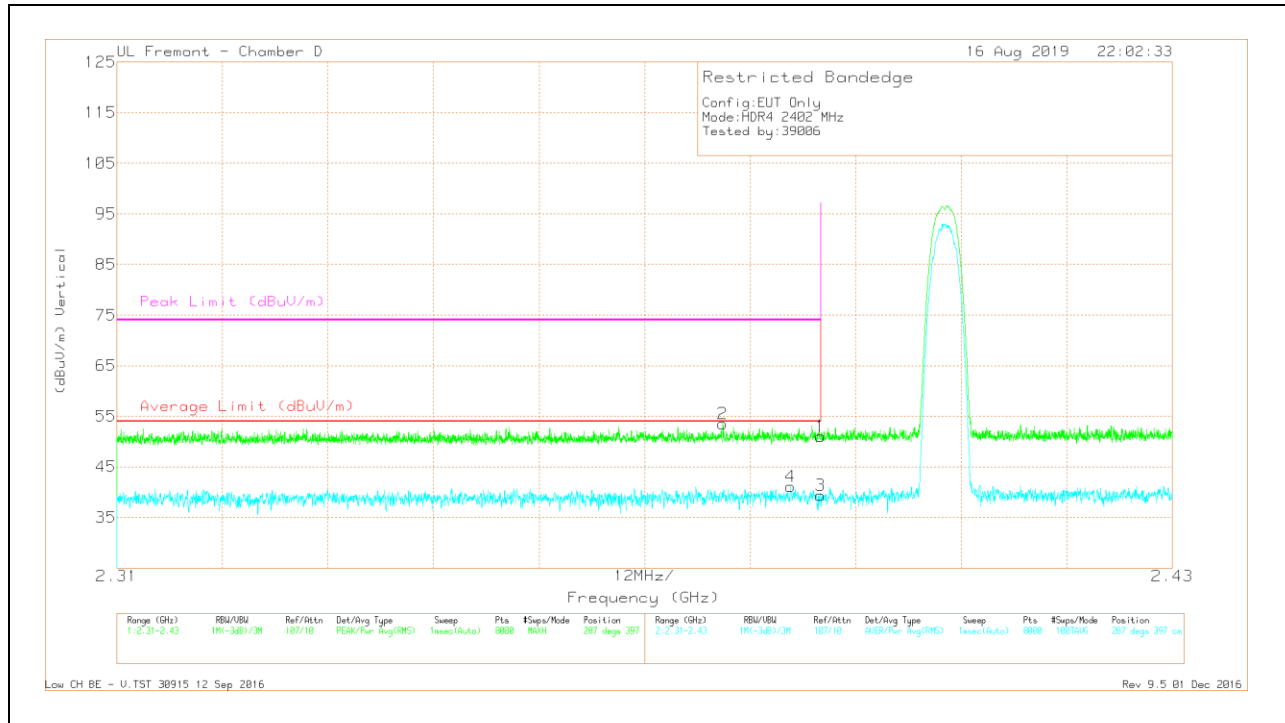


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.379	42.24	Pk	31.9	-20.6	53.54	-	-	74	-20.46	287	397	V
4	* 2.387	29.75	RMS	32	-20.7	41.05	54	-12.95	-	-	287	397	V
1	* 2.39	39.66	Pk	32	-20.6	51.06	-	-	74	-22.94	287	397	V
3	* 2.39	27.94	RMS	32	-20.6	39.34	54	-14.66	-	-	287	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

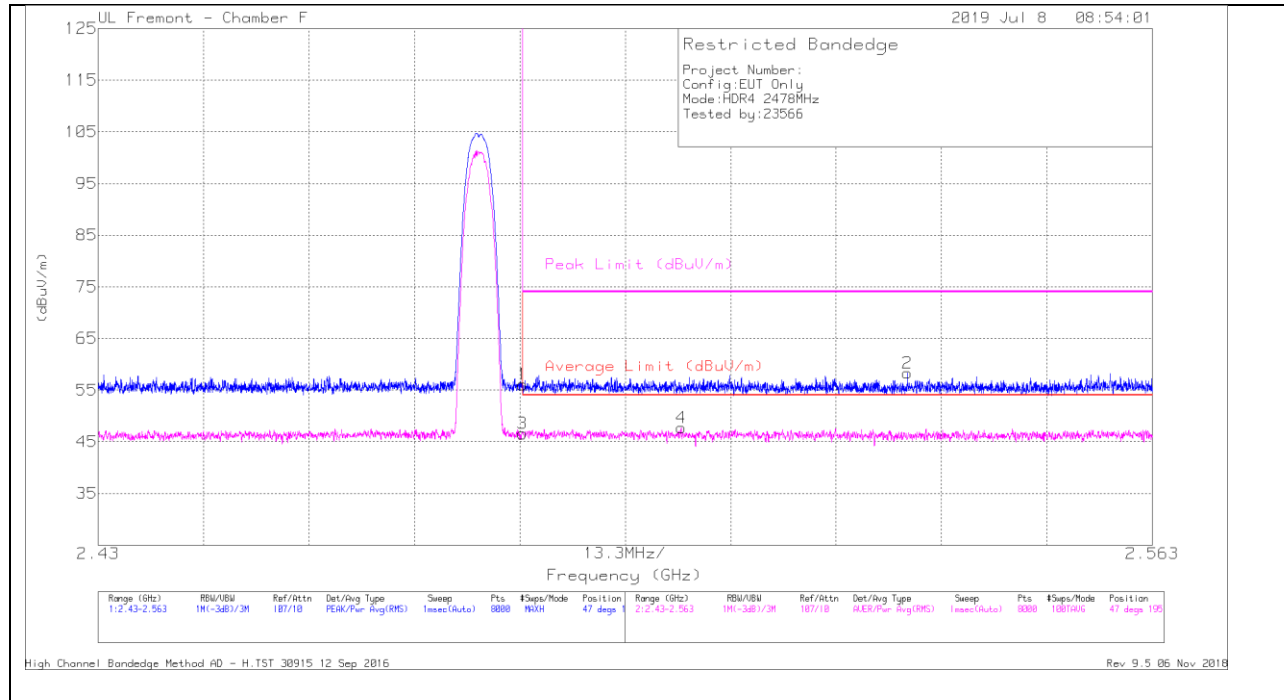BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.37	Pk	32.4	-14.7	56.07	-	-	74	-17.93	47	195	H
2	2.532	40.58	Pk	32.4	-14.7	58.28	-	-	74	-15.72	47	195	H
3	* 2.484	28.89	RMS	32.4	-14.7	46.59	54	-7.41	-	-	47	195	H
4	2.504	30.09	RMS	32.4	-14.8	47.69	54	-6.31	-	-	47	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

High Channel Bandedge Method AD - H.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

VERTICAL RESULT

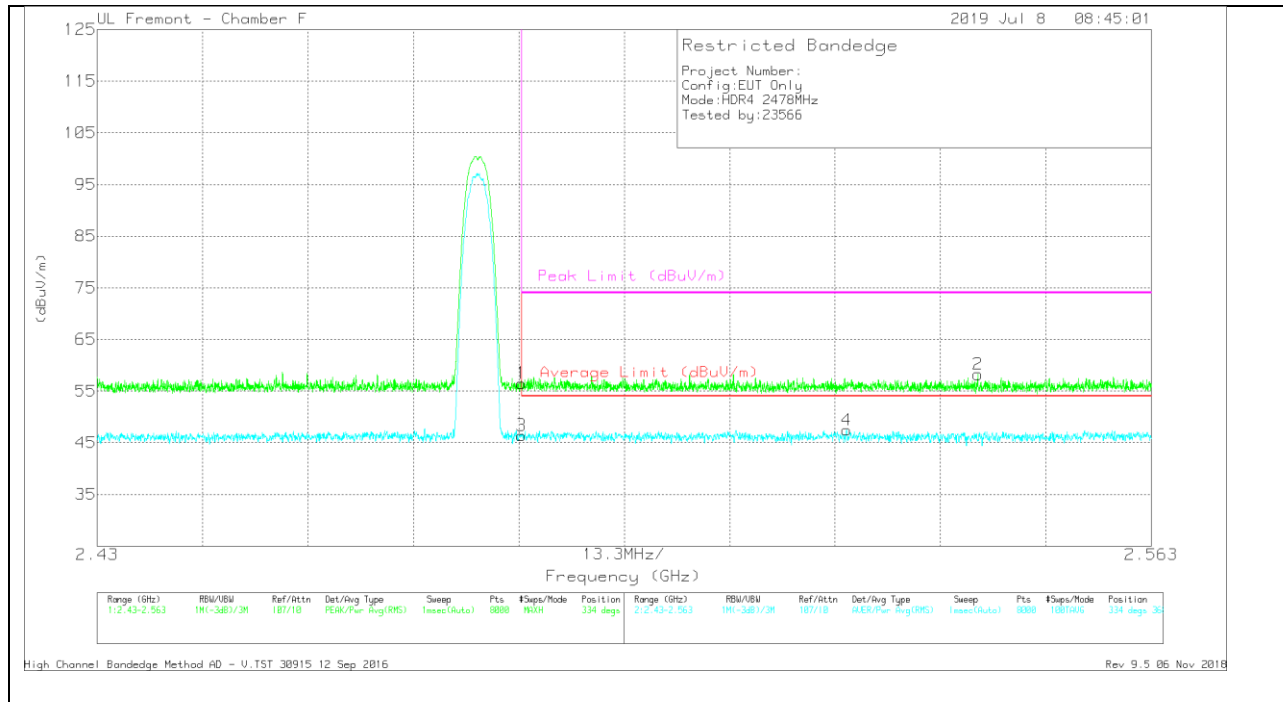

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.8	Pk	32.4	-14.7	56.5	-	-	74	-17.5	334	368	V
2	2.541	40.76	Pk	32.3	-14.8	58.26	-	-	74	-15.74	334	368	V
3	* 2.484	28.69	RMS	32.4	-14.7	46.39	54	-7.61	-	-	334	368	V
4	2.525	29.56	RMS	32.4	-14.5	47.46	54	-6.54	-	-	334	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector



RMS - RMS detection

High Channel Bandedge Method AD - V.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

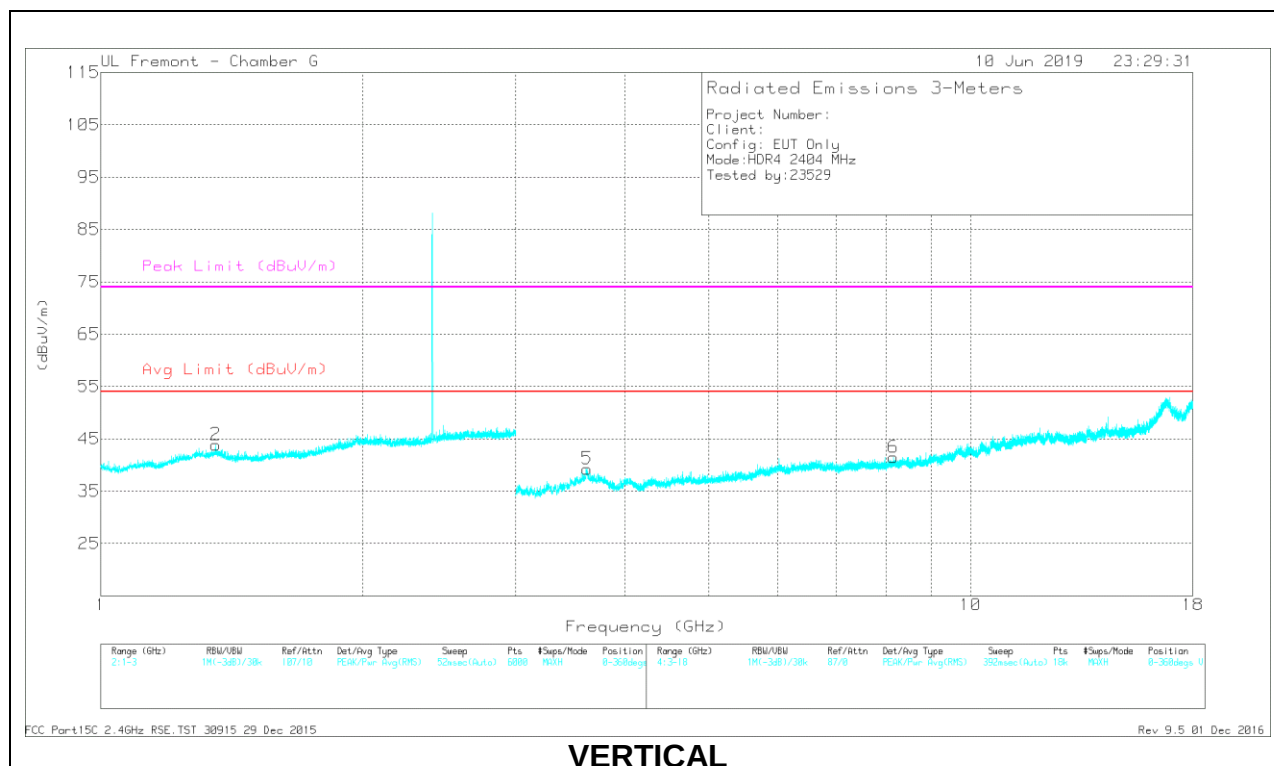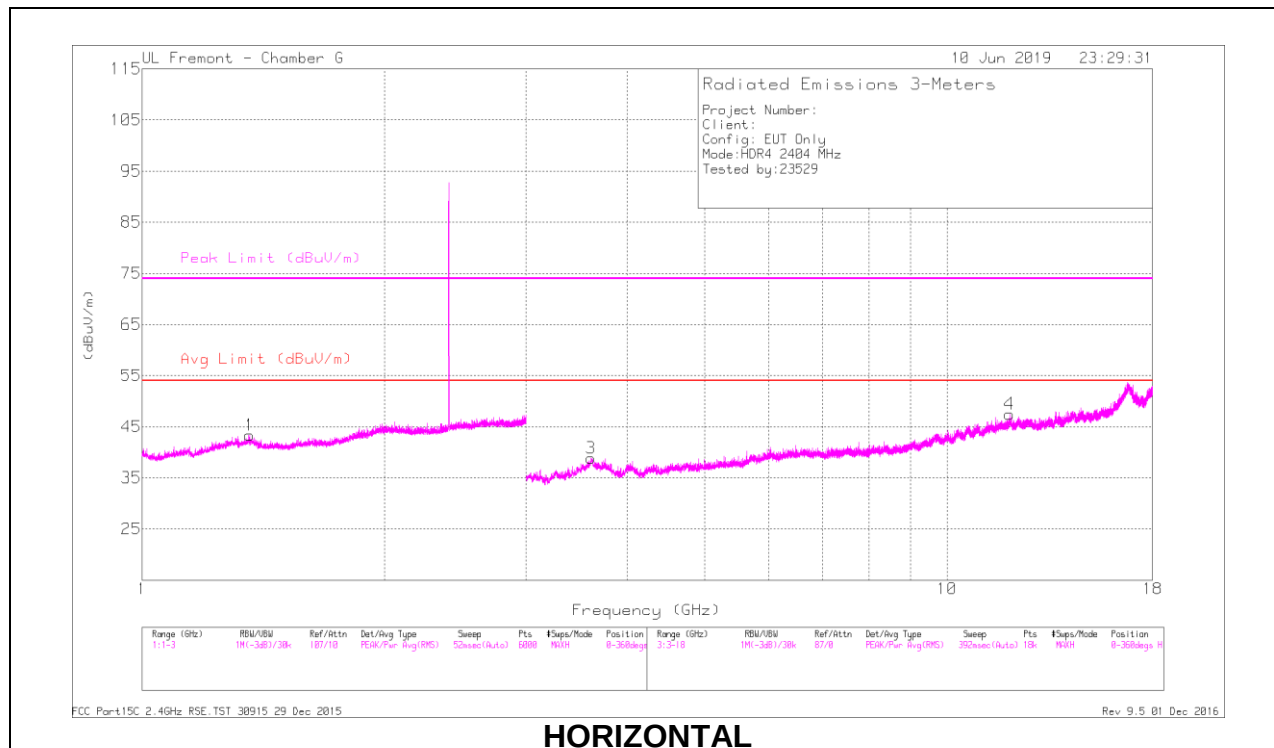

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.36	43.54	PK2	29.9	-23.3	50.14	-	-	74	-23.86	327	163	H
	* 1.358	31.97	MAv1	29.9	-23.3	38.57	54	-15.43	-	-	327	163	H
2	* 1.355	43.72	PK2	30	-23.3	50.42	-	-	74	-23.58	136	207	V
	* 1.357	32.12	MAv1	30	-23.3	38.82	54	-15.18	-	-	136	207	V
3	* 3.614	41	PK2	35.5	-30.2	46.3	-	-	74	-27.7	171	196	H
	* 3.613	29.69	MAv1	35.4	-30.2	34.89	54	-19.11	-	-	171	196	H
4	* 11.958	35.77	PK2	39.4	-21.9	53.27	-	-	74	-20.73	247	259	H
	* 11.957	24.67	MAv1	39.4	-21.9	42.17	54	-11.83	-	-	247	259	H
5	* 3.62	39.92	PK2	35.7	-30	45.62	-	-	74	-28.38	96	185	V
	* 3.622	29.37	MAv1	35.7	-29.9	35.17	54	-18.83	-	-	96	185	V
6	* 8.154	38.24	PK2	36.1	-26.4	47.94	-	-	74	-26.06	131	193	V
	* 8.157	27.17	MAv1	36.1	-26.4	36.87	54	-17.13	-	-	131	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

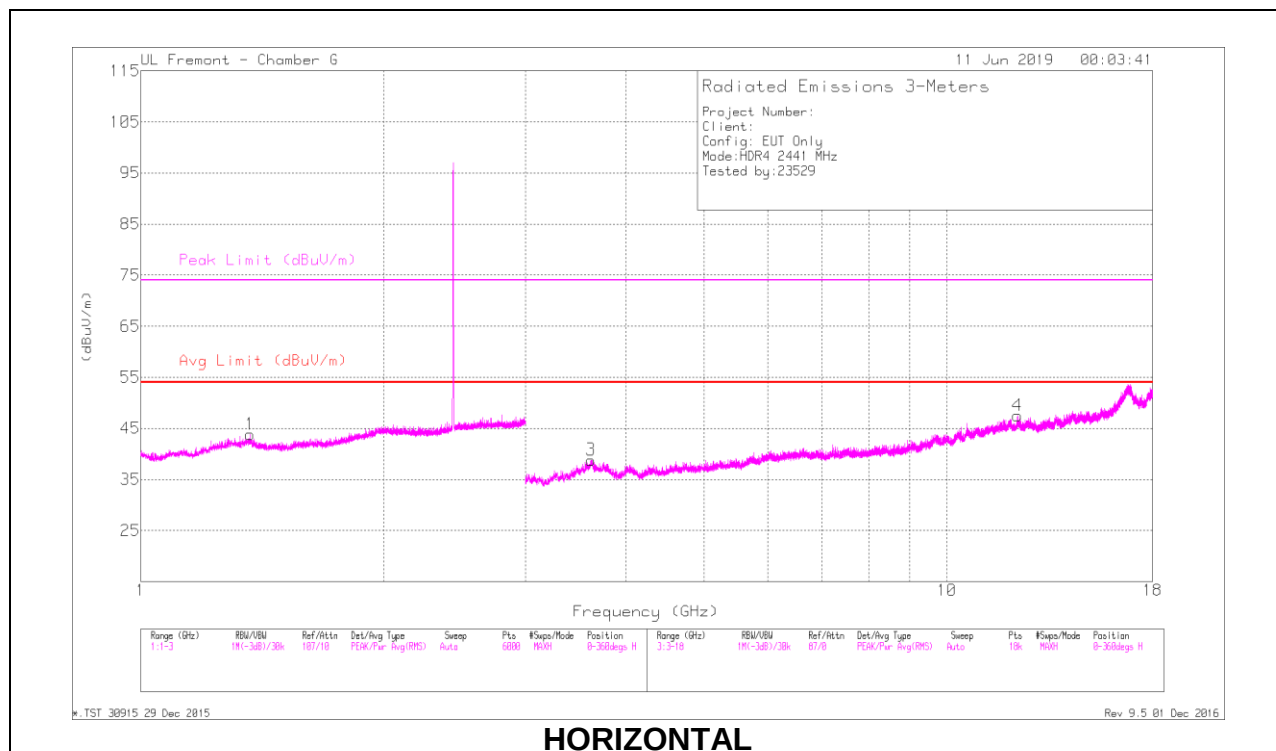

HORIZONTAL

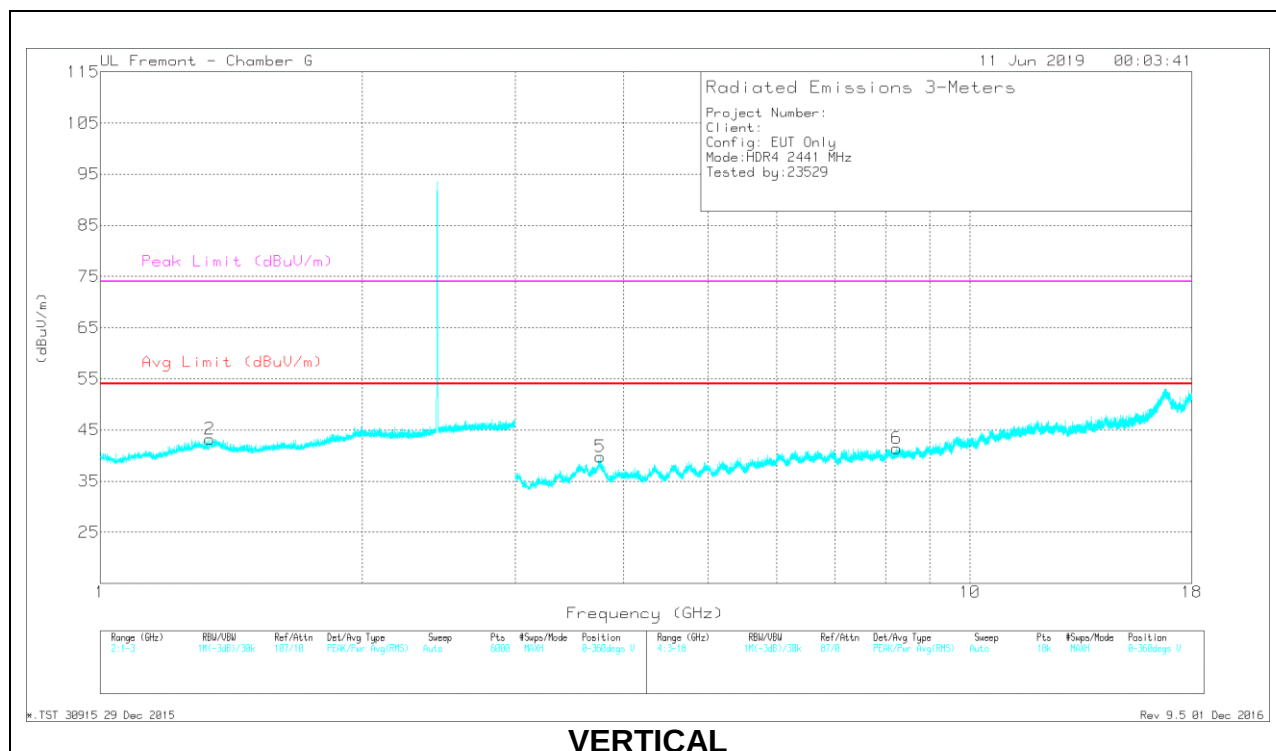

VERTICAL

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.369	43.55	PK2	30	-23.2	50.35	-	-	74	-23.65	143	127	H
	* 1.366	31.7	MAv1	30	-23.2	38.5	54	-15.5	-	-	143	127	H
2	* 1.336	42.69	PK2	29.8	-23.3	49.19	-	-	74	-24.81	276	187	V
	* 1.337	31.24	MAv1	29.8	-23.3	37.74	54	-16.26	-	-	276	187	V
3	* 3.618	40.56	PK2	35.7	-30.1	46.16	-	-	74	-27.84	219	220	H
	* 3.62	29.2	MAv1	35.7	-30	34.9	54	-19.1	-	-	219	220	H
4	* 12.239	36.23	PK2	39.5	-22.3	53.43	-	-	74	-20.57	89	167	H
	* 12.239	24.64	MAv1	39.5	-22.3	41.84	54	-12.16	-	-	89	167	H
5	* 3.762	40.21	PK2	33.8	-29.1	44.91	-	-	74	-29.09	250	252	V
	* 3.761	28.73	MAv1	33.8	-29.1	33.43	54	-20.57	-	-	250	252	V
6	* 8.242	39.05	PK2	36.1	-26.9	48.25	-	-	74	-25.75	201	198	V
	* 8.241	27.67	MAv1	36.1	-26.9	36.87	54	-17.13	-	-	201	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

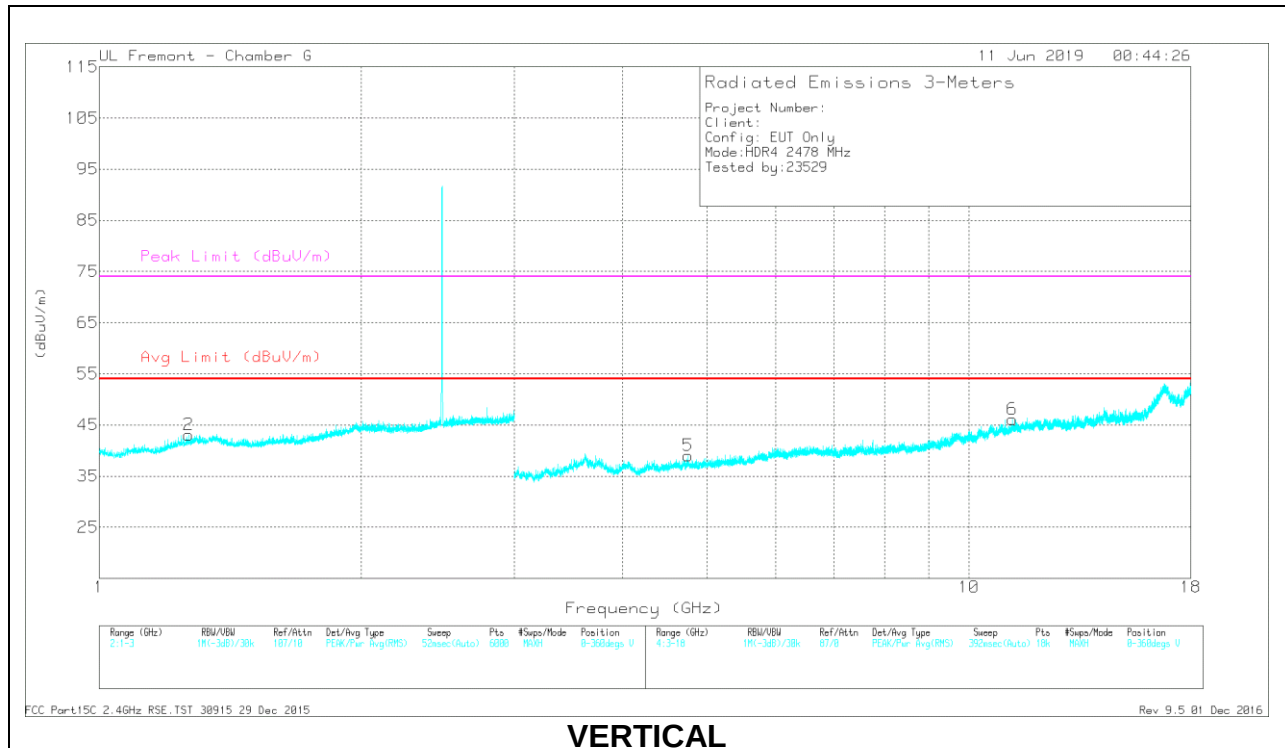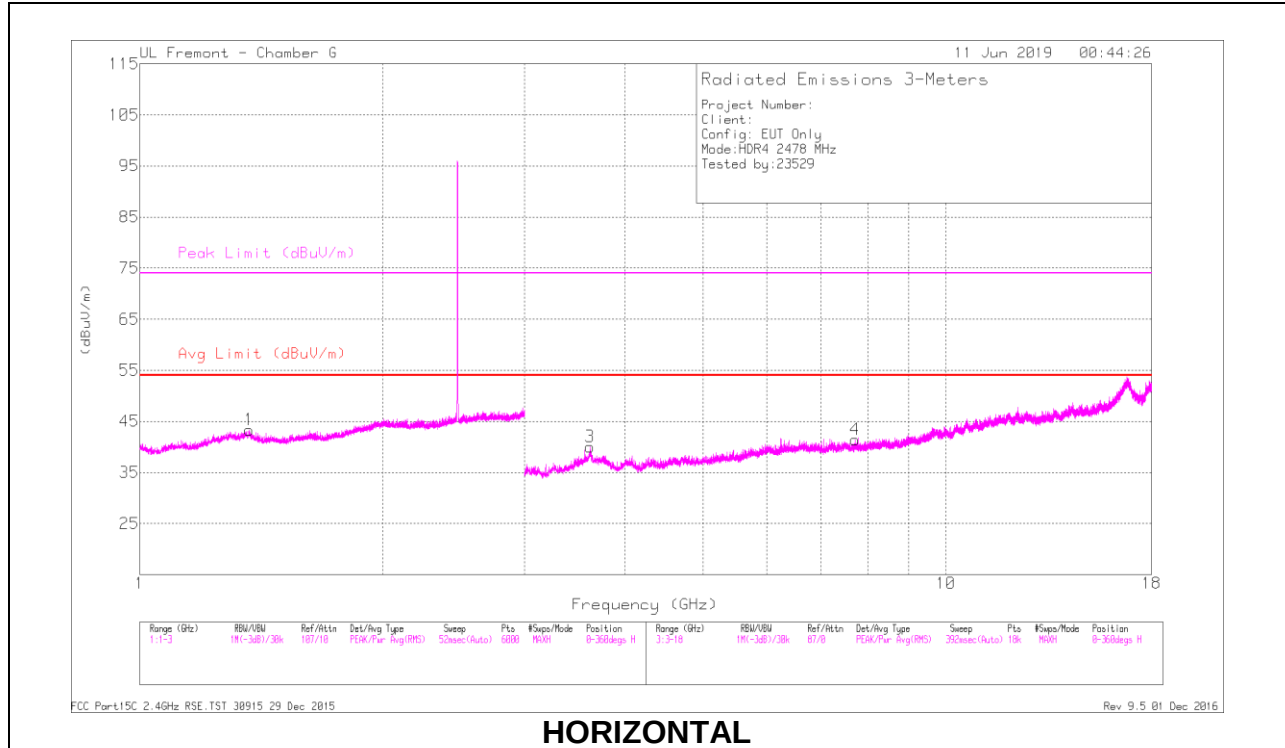

RADIATED EMISSIONS

Is ok	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.368	43.61	PK2	30	-23.2	50.41	-	-	74	-23.59	303	373	H
	* 1.366	31.68	MAv1	30	-23.2	38.48	54	-15.52	-	-	303	373	H
2	* 1.267	43.54	PK2	29.4	-23.6	49.34	-	-	74	-24.66	18	146	V
	* 1.267	31.99	MAv1	29.4	-23.6	37.79	54	-16.21	-	-	18	146	V
3	* 3.618	40.51	PK2	35.7	-30.1	46.11	-	-	74	-27.89	56	199	H
	* 3.617	29.6	MAv1	35.7	-30.1	35.2	54	-18.8	-	-	56	199	H
4	* 7.719	39.14	PK2	36.1	-27.6	47.64	-	-	74	-26.36	216	276	H
	* 7.721	27.94	MAv1	36.1	-27.5	36.54	54	-17.46	-	-	216	276	H
5	* 4.752	41.28	PK2	34.3	-29.6	45.98	-	-	74	-28.02	189	215	V
	* 4.754	29.54	MAv1	34.3	-29.6	34.24	54	-19.76	-	-	189	215	V
6	* 11.221	37.05	PK2	38.6	-22.9	52.75	-	-	74	-21.25	87	301	V
	* 11.22	25.6	MAv1	38.6	-22.9	41.3	54	-12.7	-	-	87	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average