

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.288	44.13	PK2	29.8	-23.5	50.43	-	-	74	-23.57	10	224	H
	* 1.29	32.22	MAV1	29.9	-23.5	38.62	54	-15.38	-	-	10	224	H
2	* 1.381	43.32	PK2	29.6	-23.1	49.82	-	-	74	-24.18	109	176	V
	* 1.382	31.95	MAV1	29.5	-23.1	38.35	54	-15.65	-	-	109	176	V
3	* 3.615	40.97	PK2	35.5	-30.1	46.37	-	-	74	-27.63	133	187	H
	* 3.614	29.49	MAV1	35.4	-30.2	34.69	54	-19.31	-	-	133	187	H
4	* 11.61	35.99	PK2	39.1	-22.7	52.39	-	-	74	-21.61	269	148	H
	* 11.61	25.42	MAV1	39.1	-22.8	41.72	54	-12.28	-	-	269	148	H
5	* 3.621	41.04	PK2	35.7	-30	46.74	-	-	74	-27.26	246	160	V
	* 3.618	30.39	MAV1	35.7	-30.1	35.99	54	-18.01	-	-	246	160	V
6	* 8.069	39.04	PK2	36.1	-26.9	48.24	-	-	74	-25.76	302	213	V
	* 8.069	27.76	MAV1	36.1	-26.9	36.96	54	-17.04	-	-	302	213	V
7	16.803	36.07	PK2	41.7	-17.6	60.17	-	-	-	-	134	155	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

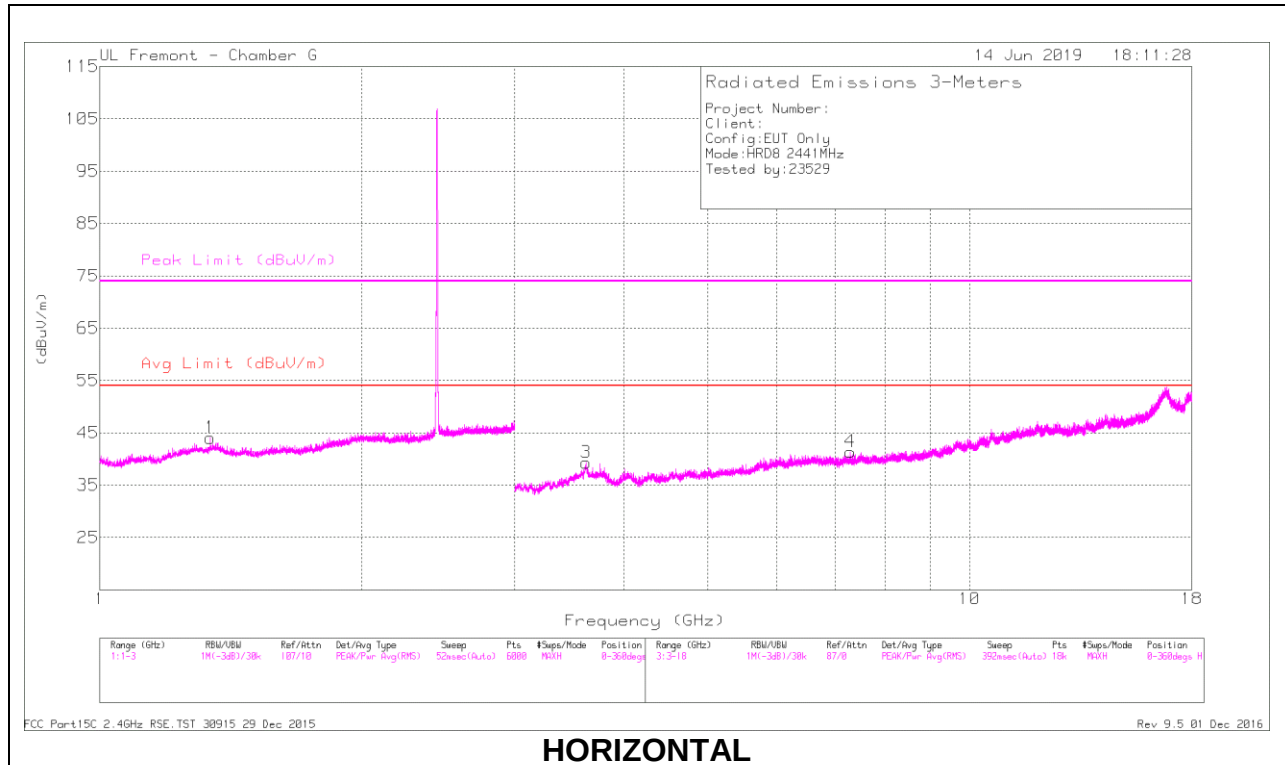

HORIZONTAL

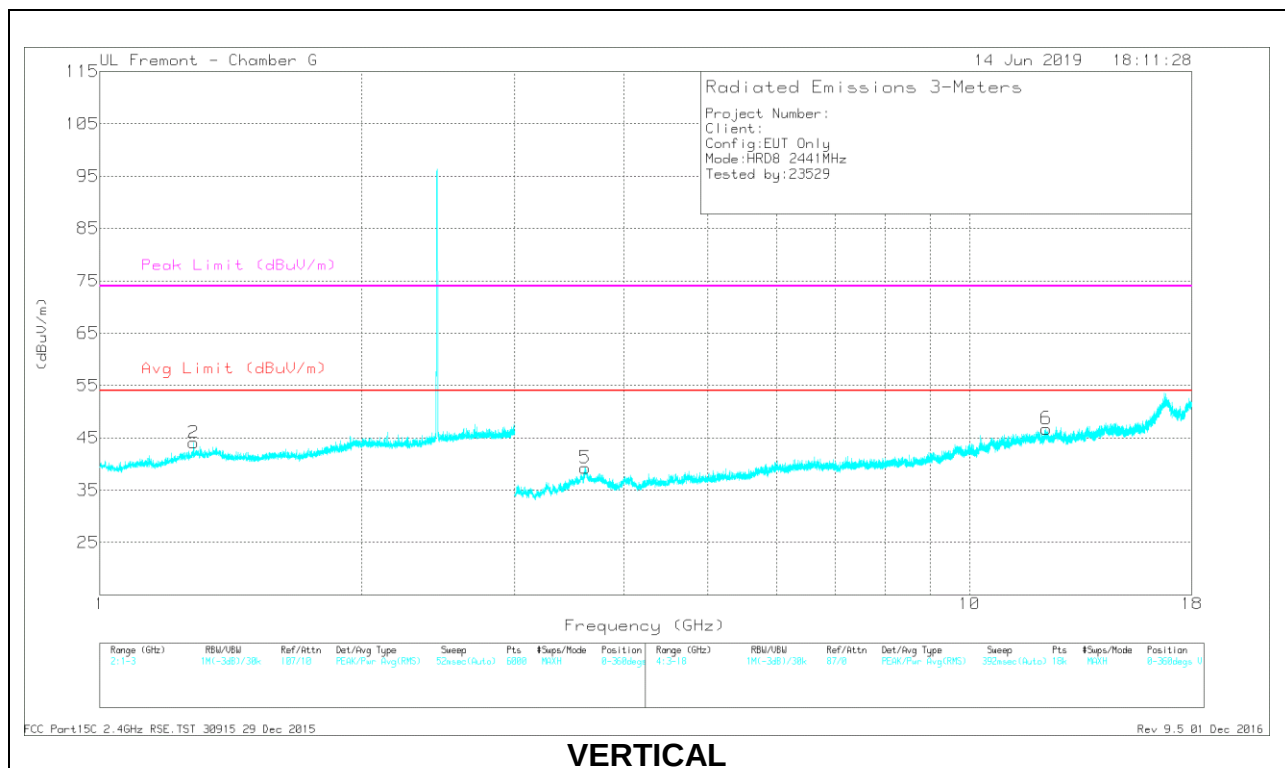

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.337	43.37	PK2	29.8	-23.3	49.87	-	-	74	-24.13	19	168	H
	* 1.339	32.08	MAV1	29.9	-23.3	38.68	54	-15.32	-	-	19	168	H
2	* 1.28	43.89	PK2	29.8	-23.6	50.09	-	-	74	-23.91	211	188	V
	* 1.281	32.07	MAV1	29.7	-23.6	38.17	54	-15.83	-	-	211	188	V
3	* 3.621	40.98	PK2	35.7	-30	46.68	-	-	74	-27.32	179	222	H
	* 3.621	29.81	MAV1	35.7	-30	35.51	54	-18.49	-	-	179	222	H
4	* 7.293	39.26	PK2	35.8	-27.4	47.66	-	-	74	-26.34	64	219	H
	* 7.292	27.99	MAV1	35.8	-27.4	36.39	54	-17.61	-	-	64	219	H
5	* 3.614	41.36	PK2	35.4	-30.2	46.56	-	-	74	-27.44	91	138	V
	* 3.615	29.83	MAV1	35.6	-30.1	35.33	54	-18.67	-	-	91	138	V
6	* 12.247	36.48	PK2	39.5	-22.4	53.58	-	-	74	-20.42	174	188	V
	* 12.248	25.26	MAV1	39.5	-22.4	42.36	54	-11.64	-	-	174	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

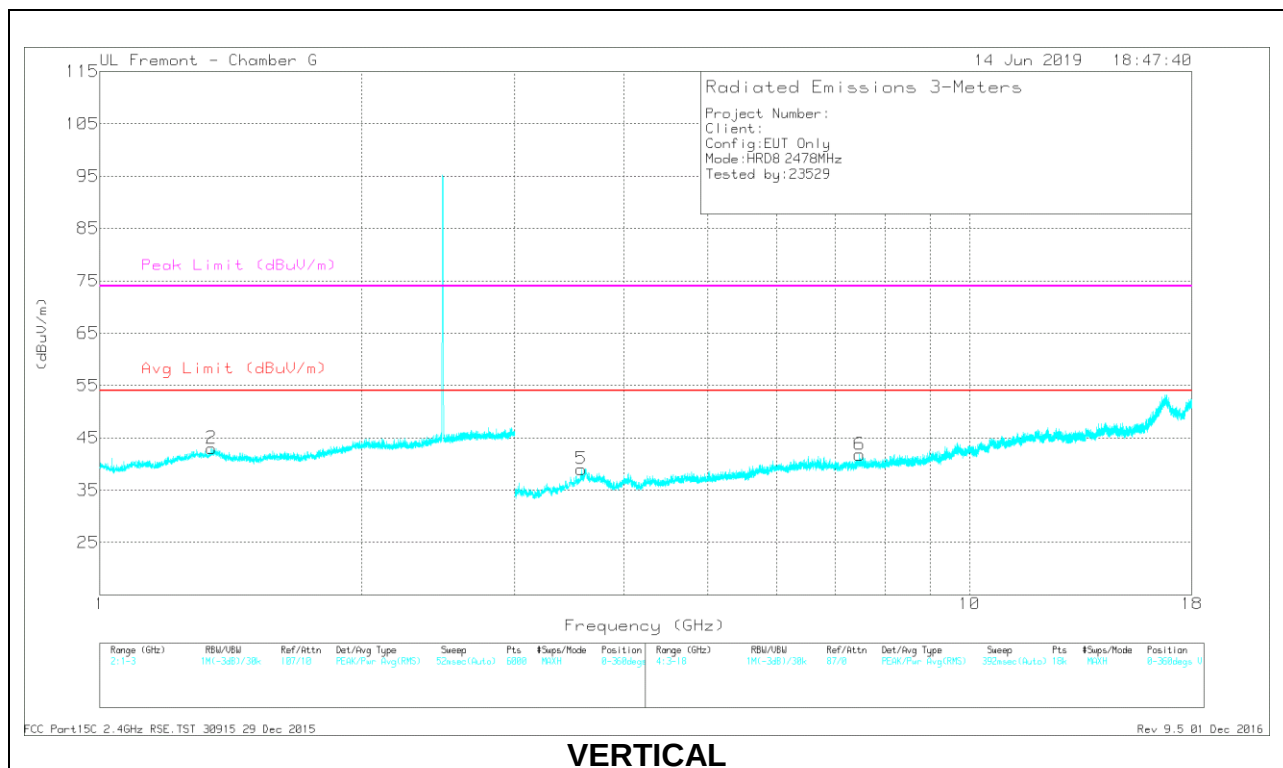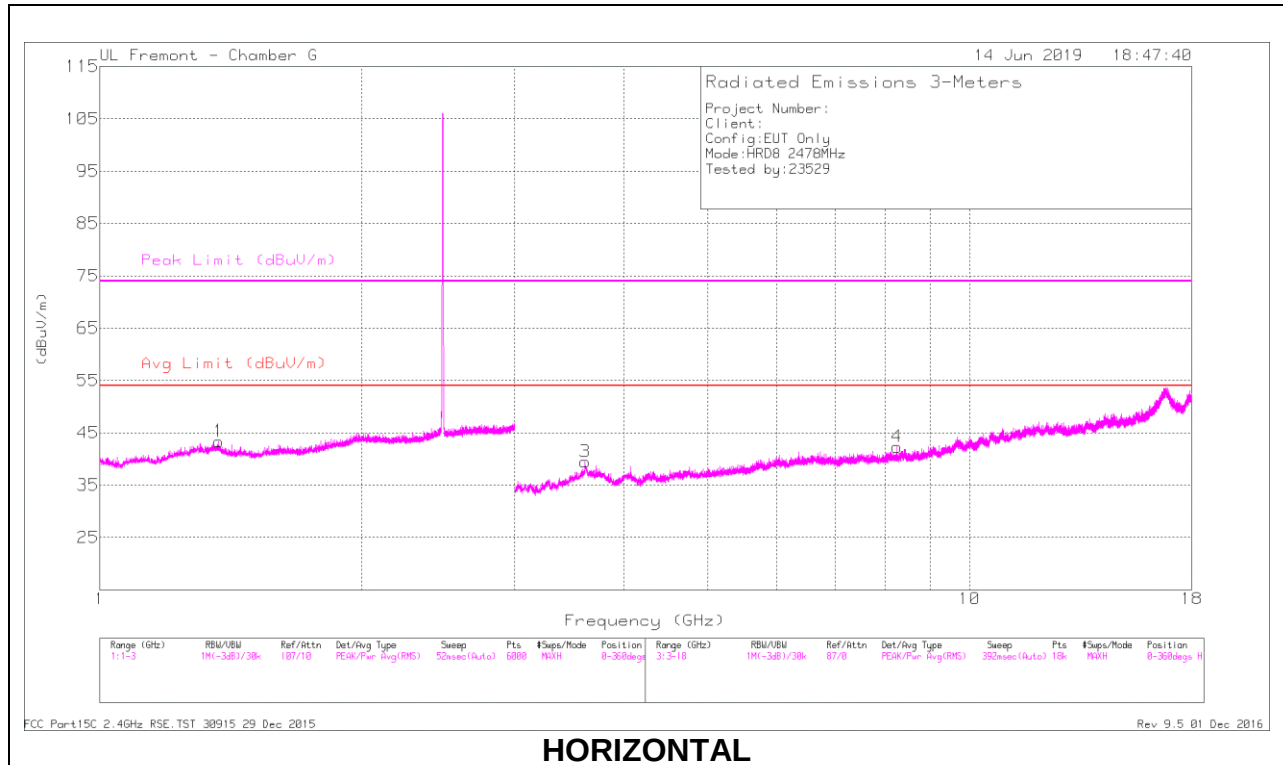

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.37	42.83	PK2	30	-23.2	49.63	-	-	74	-24.37	326	125	H
	* 1.372	31.61	MAV1	29.9	-23.2	38.31	54	-15.69	-	-	326	125	H
2	* 1.342	43.83	PK2	29.8	-23.3	50.33	-	-	74	-23.67	135	220	V
	* 1.344	32.16	MAV1	29.8	-23.3	38.66	54	-15.34	-	-	135	220	V
3	* 3.613	40.74	PK2	35.4	-30.2	45.94	-	-	74	-28.06	148	187	H
	* 3.612	29.41	MAV1	35.3	-30.2	34.51	54	-19.49	-	-	148	187	H
4	* 8.248	39.09	PK2	36.1	-26.9	48.29	-	-	74	-25.71	264	209	H
	* 8.25	27.73	MAV1	36.2	-26.9	37.03	54	-16.97	-	-	264	209	H
6	* 7.471	39.08	PK2	36	-27.4	47.68	-	-	74	-26.32	66	174	V
	* 7.473	28.08	MAV1	36	-27.3	36.78	54	-17.22	-	-	66	174	V
5	* 3.578	42.17	PK2	35.2	-30.6	46.77	-	-	74	-27.23	82	171	V
	* 3.578	30.16	MAV1	35.2	-30.6	34.76	54	-19.24	-	-	82	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

9.2.7. BEAMFORMING LOW POWER HDR (HDR4)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

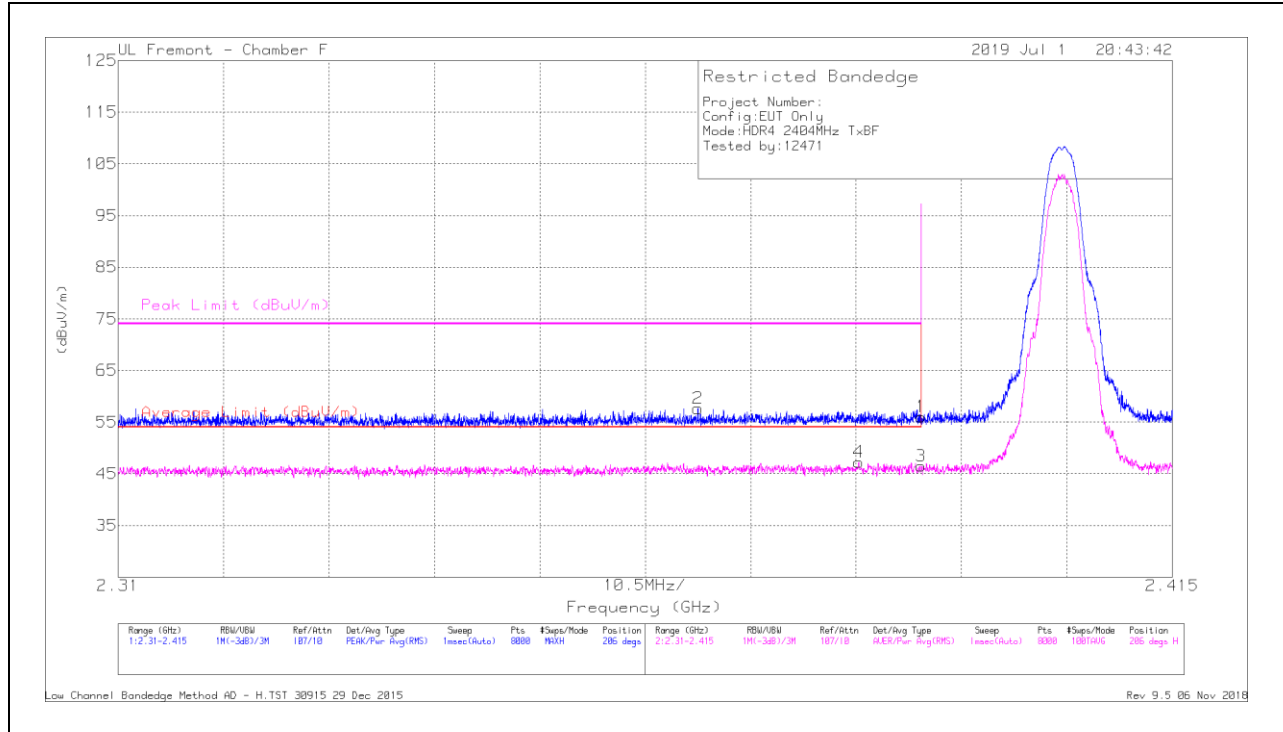


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.51	Pk	32	-14.5	56.01	-	-	74	-17.99	206	108	H
2	* 2.368	40.25	Pk	31.8	-14.4	57.65	-	-	74	-16.35	206	108	H
3	* 2.39	29	RMS	32	-14.5	46.5	54	-7.5	-	-	206	108	H
4	* 2.384	29.86	RMS	31.9	-14.5	47.26	54	-6.74	-	-	206	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

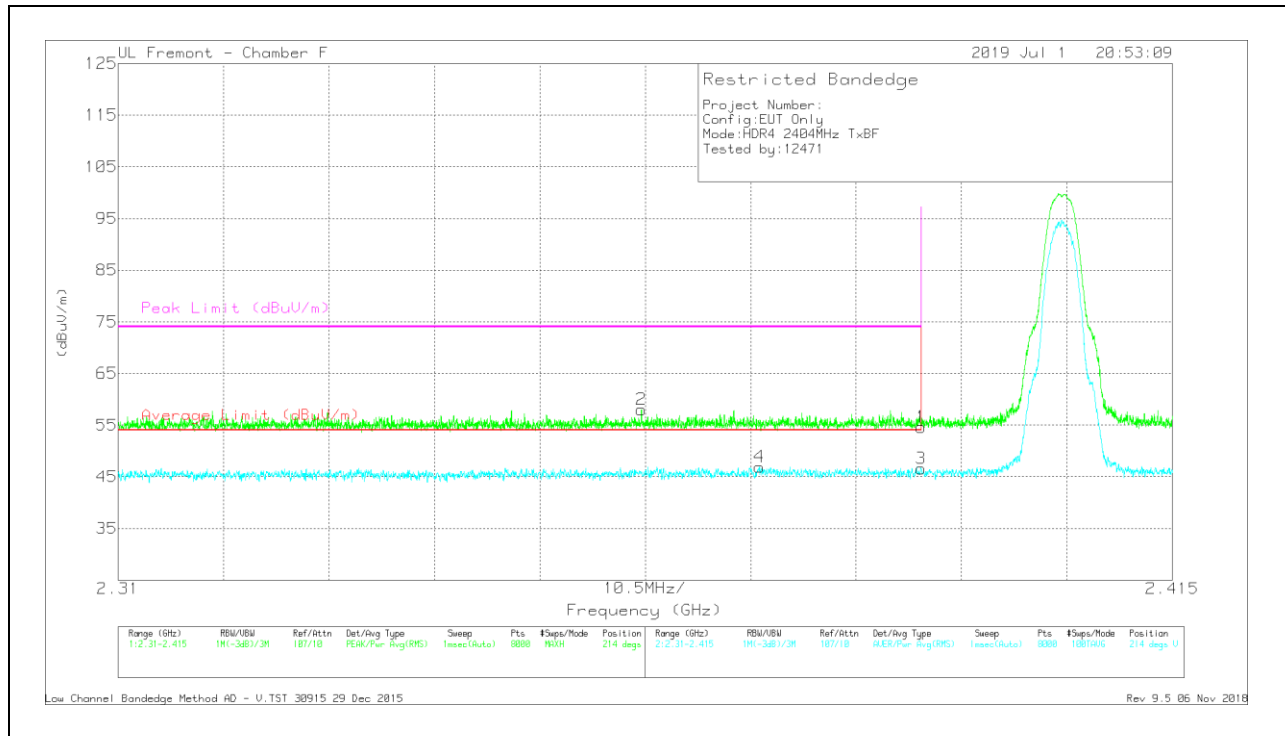

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.11	Pk	32	-14.5	54.61	-	-	74	-19.39	214	398	V
2	* 2.362	40.61	Pk	31.8	-14.4	58.01	-	-	74	-15.99	214	398	V
3	* 2.39	29.08	RMS	32	-14.5	46.58	54	-7.42	-	-	214	398	V
4	* 2.374	29.41	RMS	31.9	-14.4	46.91	54	-7.09	-	-	214	398	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

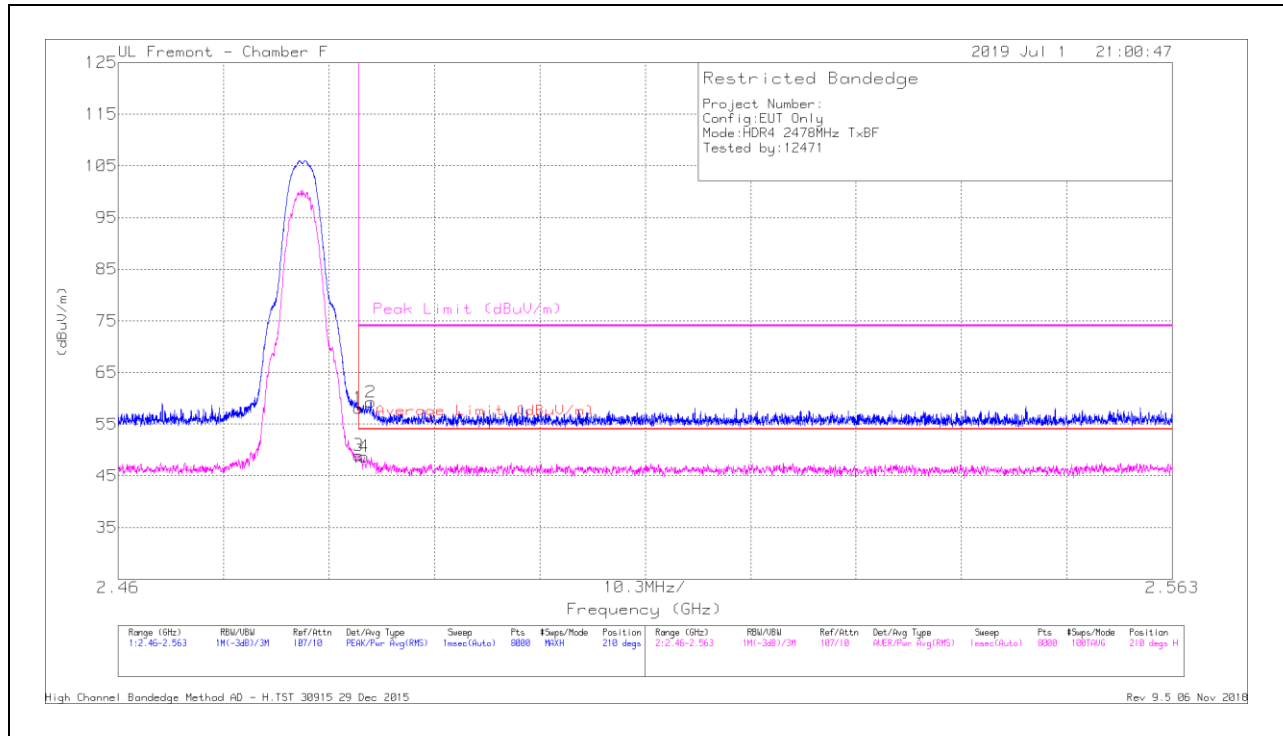


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.38	Pk	32.4	-14.7	58.08	-	-	74	-15.92	210	103	H
2	* 2.485	41.46	Pk	32.4	-14.6	59.26	-	-	74	-14.74	210	103	H
3	* 2.484	31.25	RMS	32.4	-14.7	48.95	54	-5.05	-	-	210	103	H
4	* 2.484	31	RMS	32.4	-14.7	48.7	54	-5.3	-	-	210	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

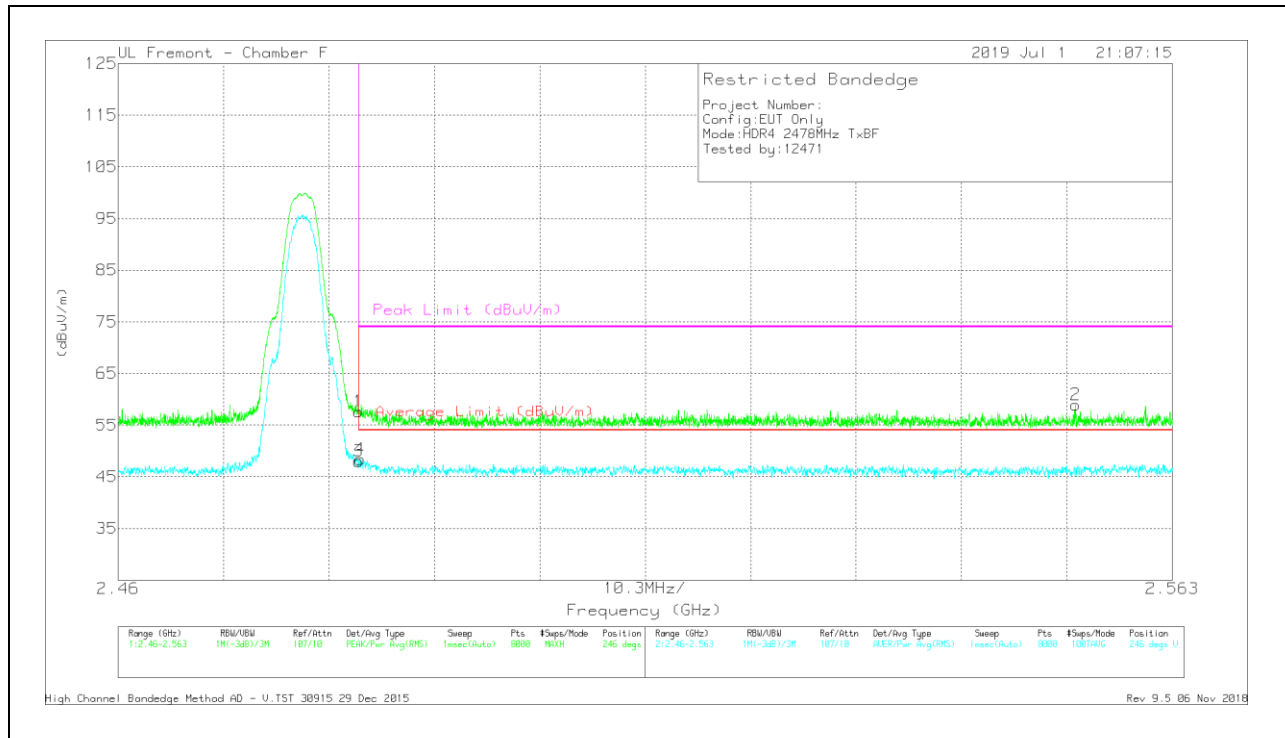

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.9	Pk	32.4	-14.7	57.6	-	-	74	-16.4	246	367	V
2	2.554	41.14	Pk	32.3	-14.5	58.94	-	-	74	-15.06	246	367	V
3	* 2.484	30.34	RMS	32.4	-14.7	48.04	54	-5.96	-	-	246	367	V
4	* 2.484	30.71	RMS	32.4	-14.7	48.41	54	-5.59	-	-	246	367	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

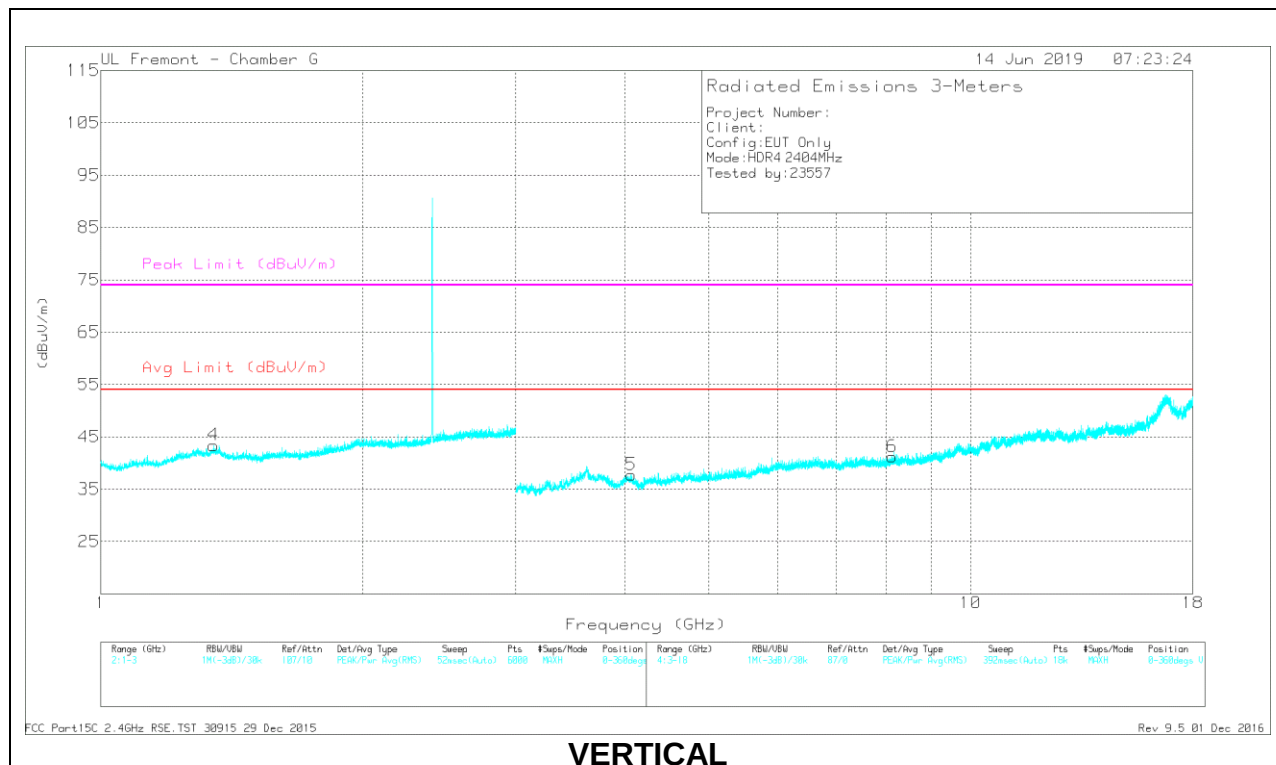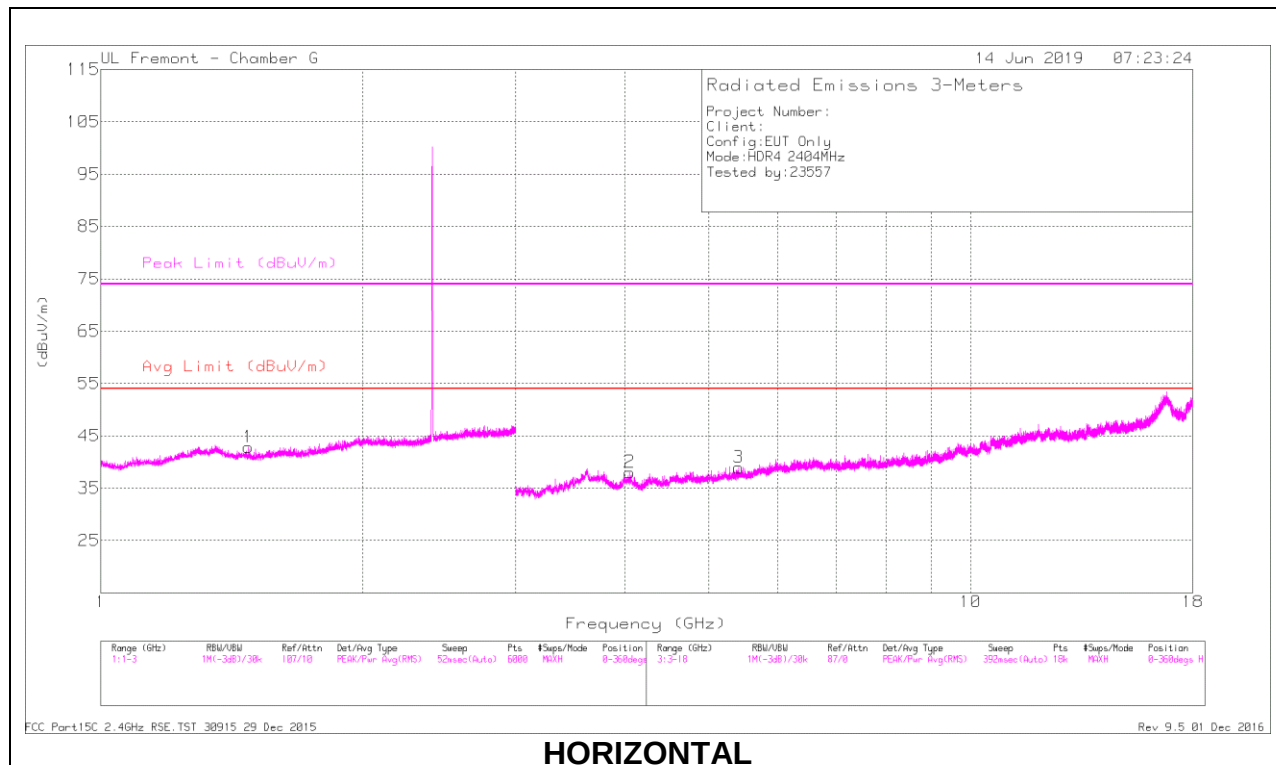

RADIATED EMISSIONS



Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.476	43.85	PK2	28.4	-22.3	49.95	-	-	74	-24.05	80	229	H
1	* 1.479	31.63	MAv1	28.3	-22.3	37.63	54	-16.37	-	-	80	229	H
	* 1.347	43.93	PK2	29.8	-23.3	50.43	-	-	74	-23.57	291	117	V
4	* 1.347	31.4	MAv1	29.8	-23.3	37.9	54	-16.1	-	-	291	117	V
	* 4.057	40.52	PK2	33.7	-29.3	44.92	-	-	74	-29.08	151	391	H
2	* 4.055	29.02	MAv1	33.7	-29.3	33.42	54	-20.58	-	-	151	391	H
	* 5.41	40.28	PK2	34.8	-29.1	45.98	-	-	74	-28.02	144	193	H
3	* 5.411	28.25	MAv1	34.8	-29.1	33.95	54	-20.05	-	-	144	193	H
	* 4.074	40.85	PK2	33.7	-29.4	45.15	-	-	74	-28.85	144	154	V
5	* 4.074	29.28	MAv1	33.7	-29.4	33.58	54	-20.42	-	-	144	154	V
	* 8.123	38.88	PK2	36.1	-26.6	48.38	-	-	74	-25.62	219	208	V
6	* 8.123	26.73	MAv1	36.1	-26.6	36.23	54	-17.77	-	-	219	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

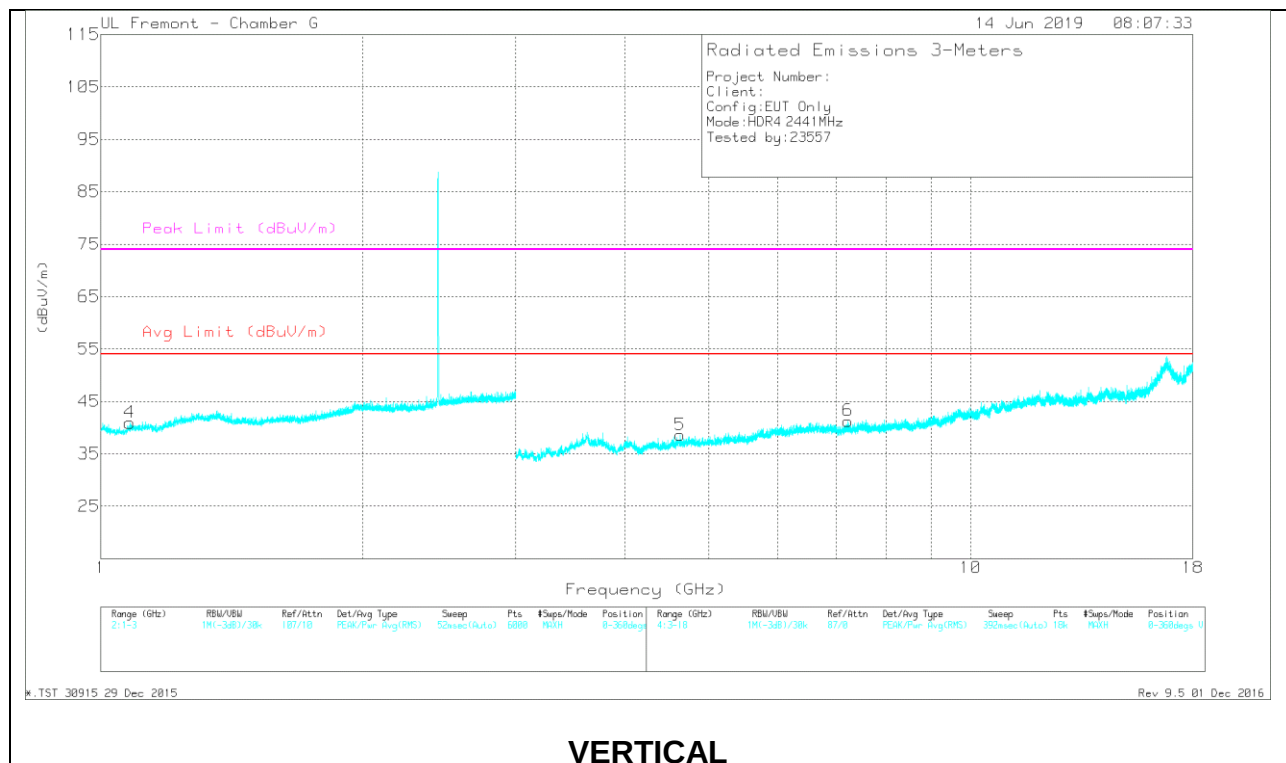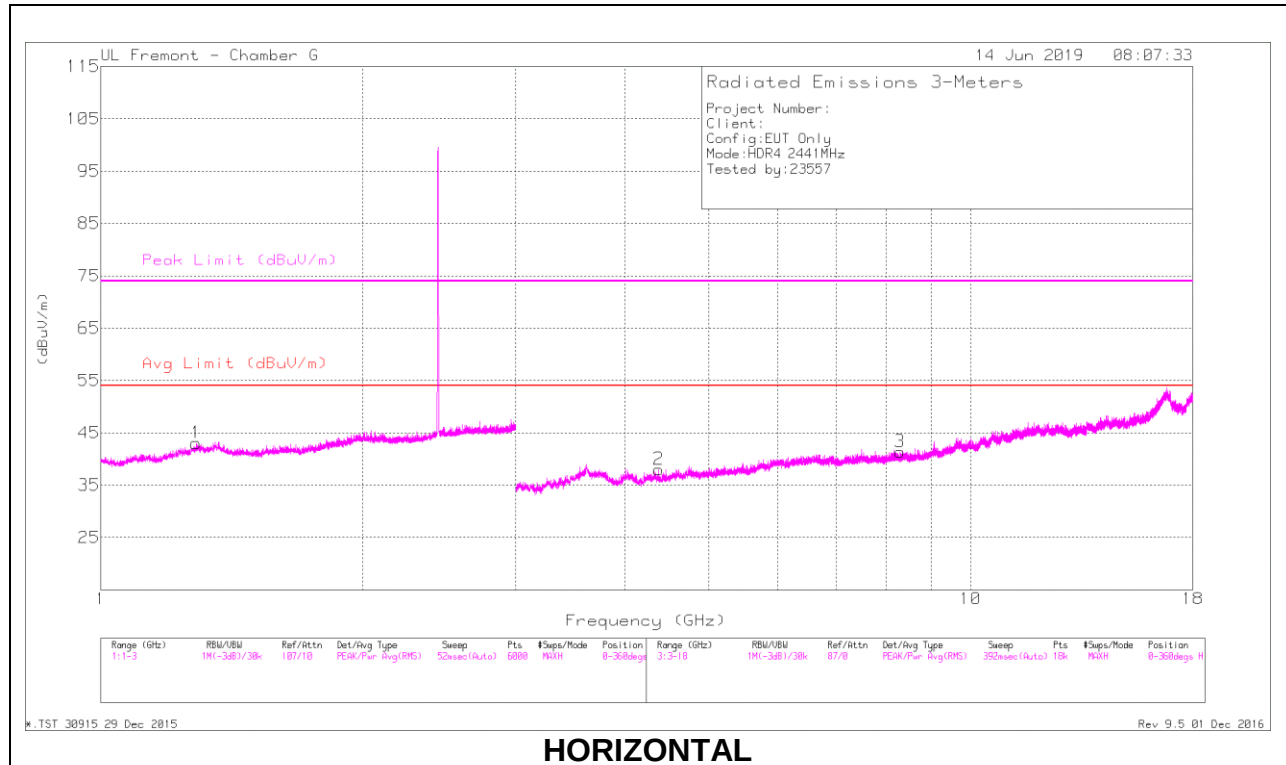

RADIATED EMISSIONS



Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.285	44.02	PK2	29.7	-23.5	50.22	-	-	74	-23.78	130	323	H
1	* 1.287	31.84	MAv1	29.7	-23.5	38.04	54	-15.96	-	-	130	323	H
	* 1.081	44.3	PK2	27.6	-23.9	48	-	-	74	-26	292	341	V
4	* 1.081	32.05	MAv1	27.6	-23.9	35.75	54	-18.25	-	-	292	341	V
	* 4.375	39.67	PK2	33.8	-29.7	43.77	-	-	74	-30.23	111	108	H
2	* 4.378	28.21	MAv1	33.8	-29.7	32.31	54	-21.69	-	-	111	108	H
	* 8.294	39.33	PK2	36.1	-27.1	48.33	-	-	74	-25.67	300	143	H
3	* 8.293	27.12	MAv1	36.1	-27.2	36.02	54	-17.98	-	-	300	143	H
	* 4.634	40.96	PK2	34.2	-29.6	45.56	-	-	74	-28.44	327	159	V
5	* 4.637	29.09	MAv1	34.2	-29.6	33.69	54	-20.31	-	-	327	159	V
	7.23	27.48	MAv1	35.9	-27.5	35.88	-	-	-	-	250	101	V
6	7.231	38.95	PK2	35.9	-27.5	47.35	-	-	-	-	250	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

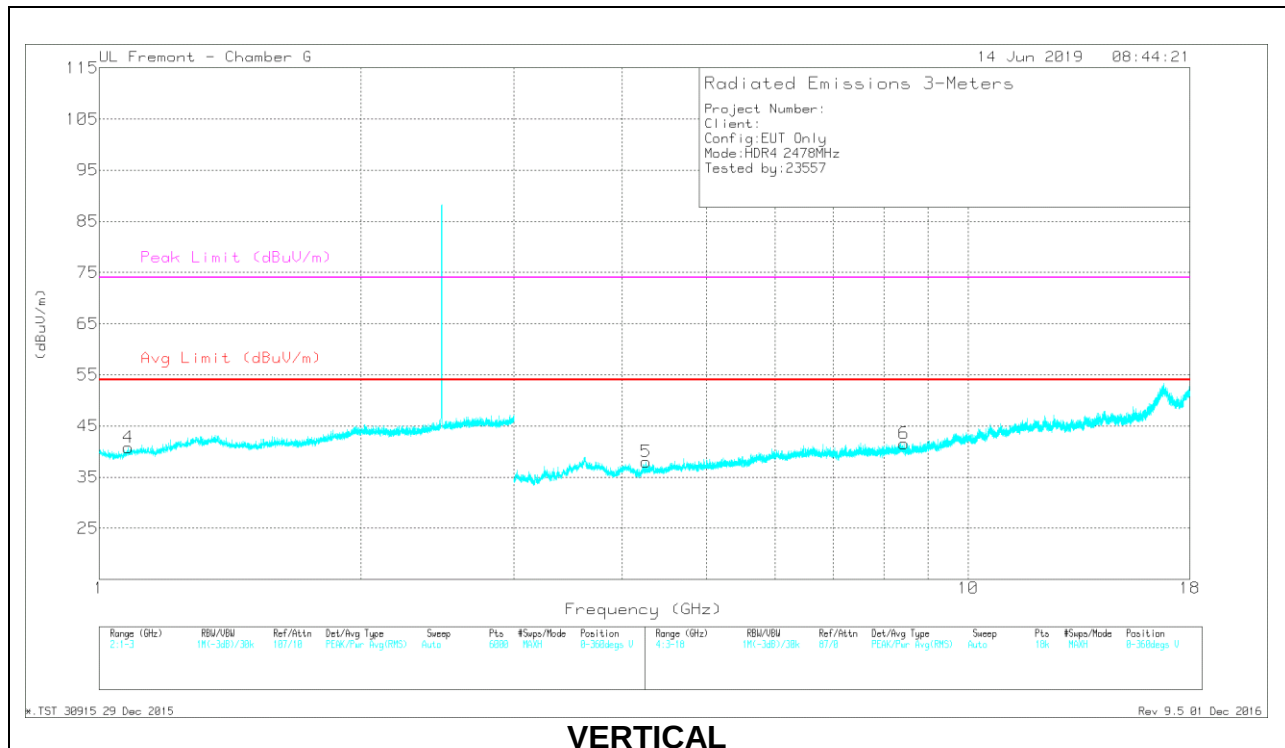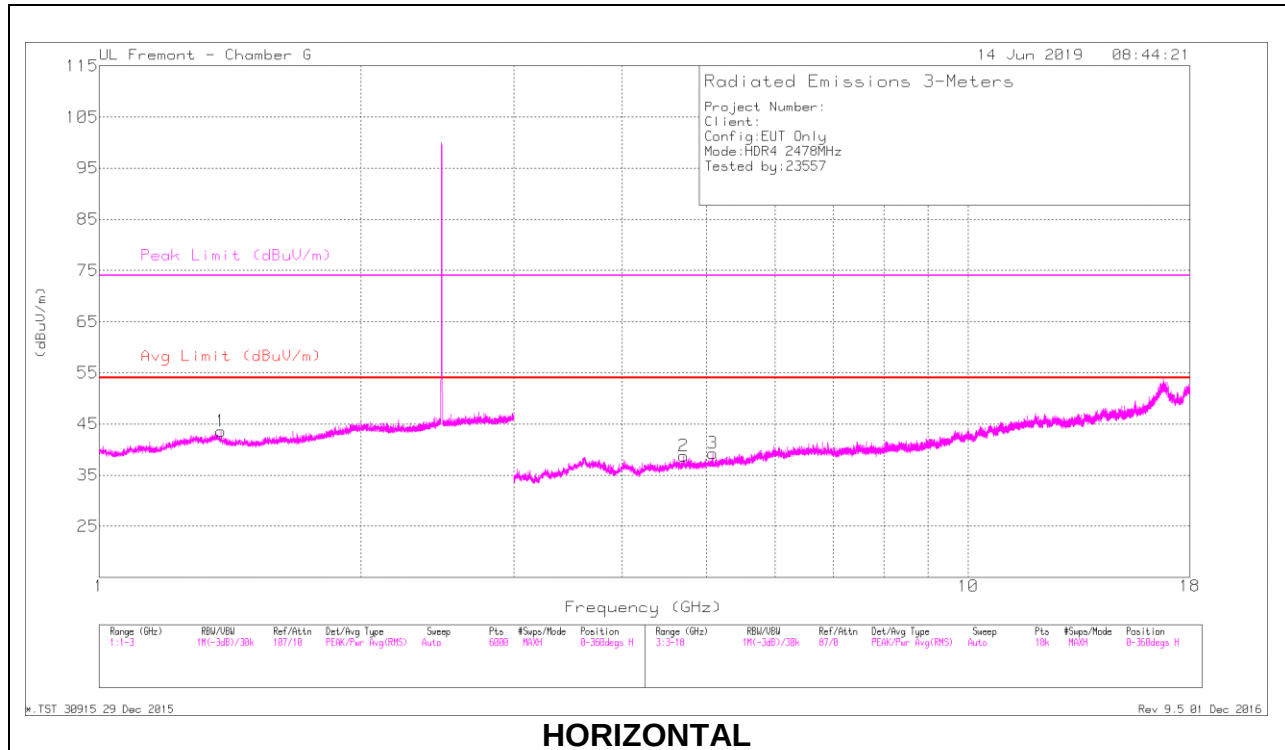

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.379	43.54	PK2	29.6	-23.1	50.04	-	-	74	-23.96	10	298	H
1	* 1.382	31.45	MAv1	29.5	-23.1	37.85	54	-16.15	-	-	10	298	H
	* 1.082	44.04	PK2	27.6	-23.9	47.74	-	-	74	-26.26	225	139	V
4	* 1.082	31.96	MAv1	27.6	-23.9	35.66	54	-18.34	-	-	225	139	V
	* 4.71	40.53	PK2	34.3	-29.5	45.33	-	-	74	-28.67	227	172	H
2	* 4.71	29.08	MAv1	34.3	-29.5	33.88	54	-20.12	-	-	227	172	H
	* 5.083	40.5	PK2	34.4	-29.4	45.5	-	-	74	-28.5	75	255	H
3	* 5.081	28.39	MAv1	34.4	-29.4	33.39	54	-20.61	-	-	75	255	H
	* 4.263	40.49	PK2	33.6	-29.4	44.69	-	-	74	-29.31	354	159	V
5	* 4.262	28.86	MAv1	33.6	-29.4	33.06	54	-20.94	-	-	354	159	V
	* 8.438	38.17	PK2	36.1	-26.1	48.17	-	-	74	-25.83	42	332	V
6	* 8.44	26.1	MAv1	36.1	-26.1	36.1	54	-17.9	-	-	42	332	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.8. BEAMFORMING LOW POWER HDR (HDR8)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

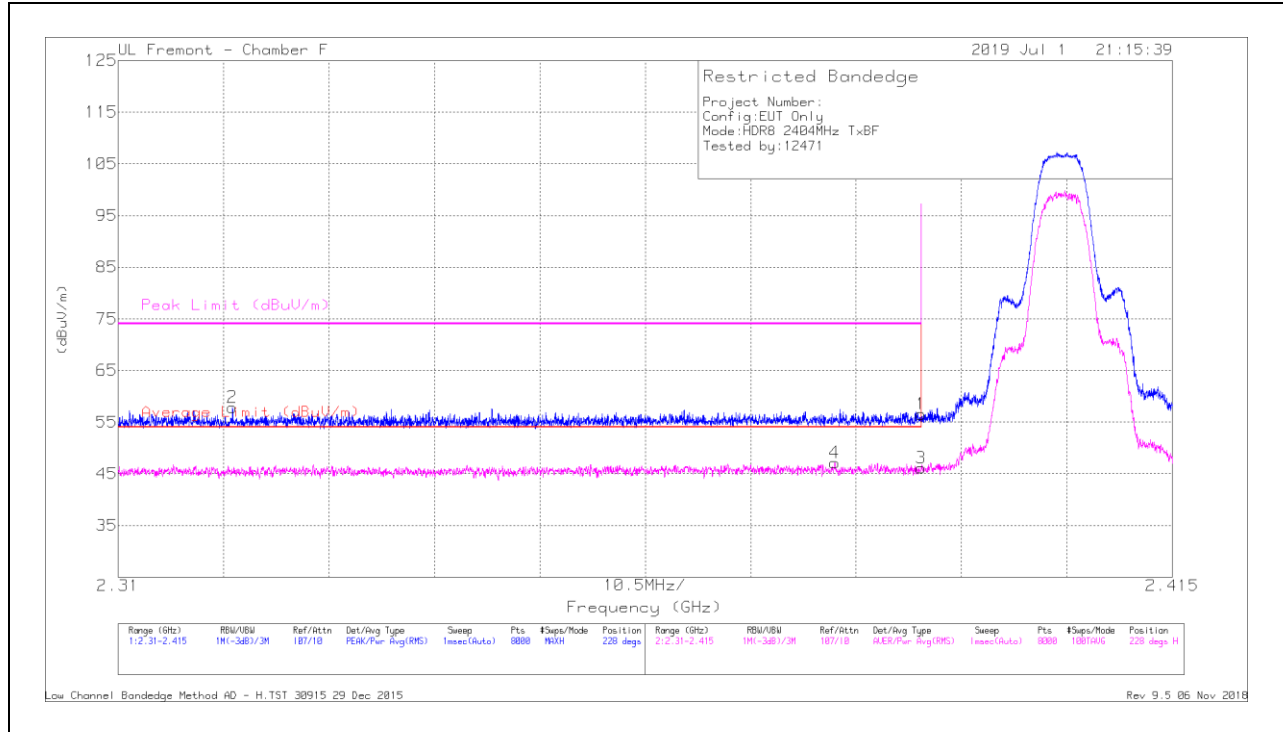


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.05	Pk	32	-14.5	56.55	-	-	74	-17.45	228	112	H
2	* 2.321	40.75	Pk	31.7	-14.6	57.85	-	-	74	-16.15	228	112	H
3	* 2.39	28.62	RMS	32	-14.5	46.12	54	-7.88	-	-	228	112	H
4	* 2.381	29.73	RMS	31.9	-14.5	47.13	54	-6.87	-	-	228	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

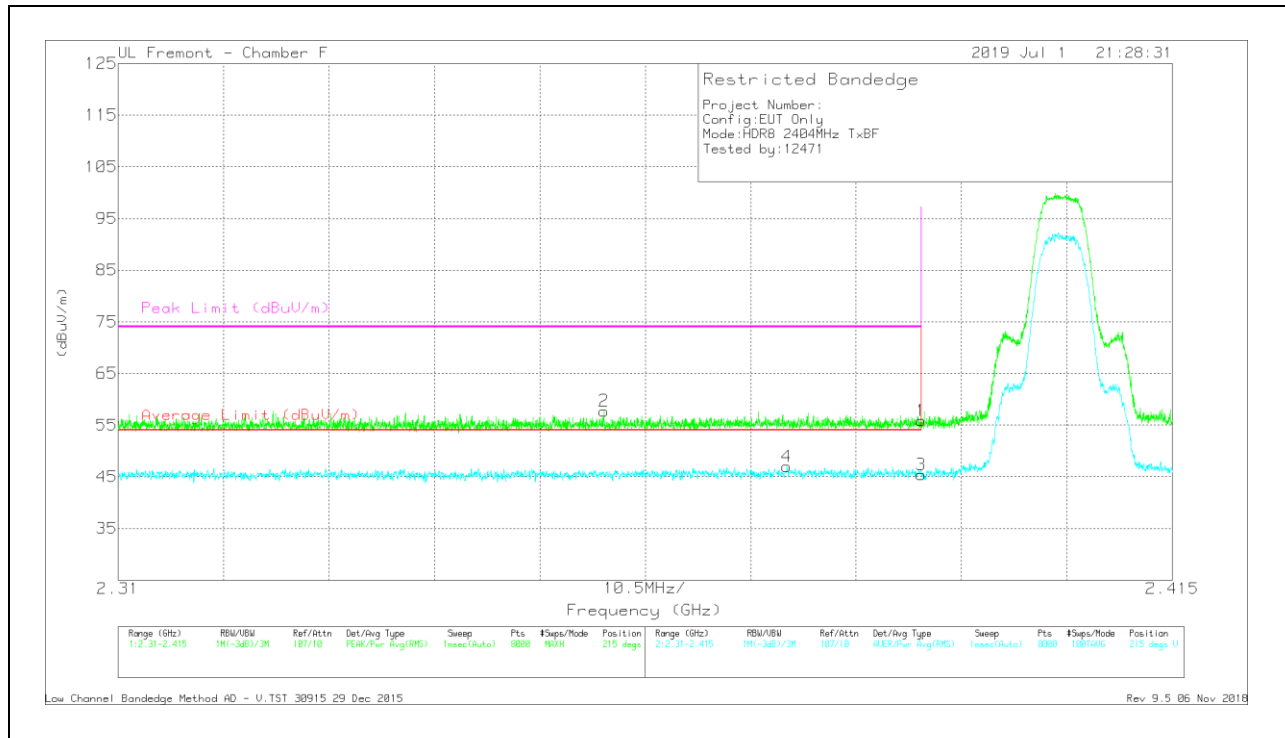

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.36	Pk	32	-14.5	55.86	-	-	74	-18.14	215	394	V
2	* 2.358	40.52	Pk	31.8	-14.6	57.72	-	-	74	-16.28	215	394	V
3	* 2.39	27.9	RMS	32	-14.5	45.4	54	-8.6	-	-	215	394	V
4	* 2.377	29.46	RMS	31.9	-14.4	46.96	54	-7.04	-	-	215	394	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

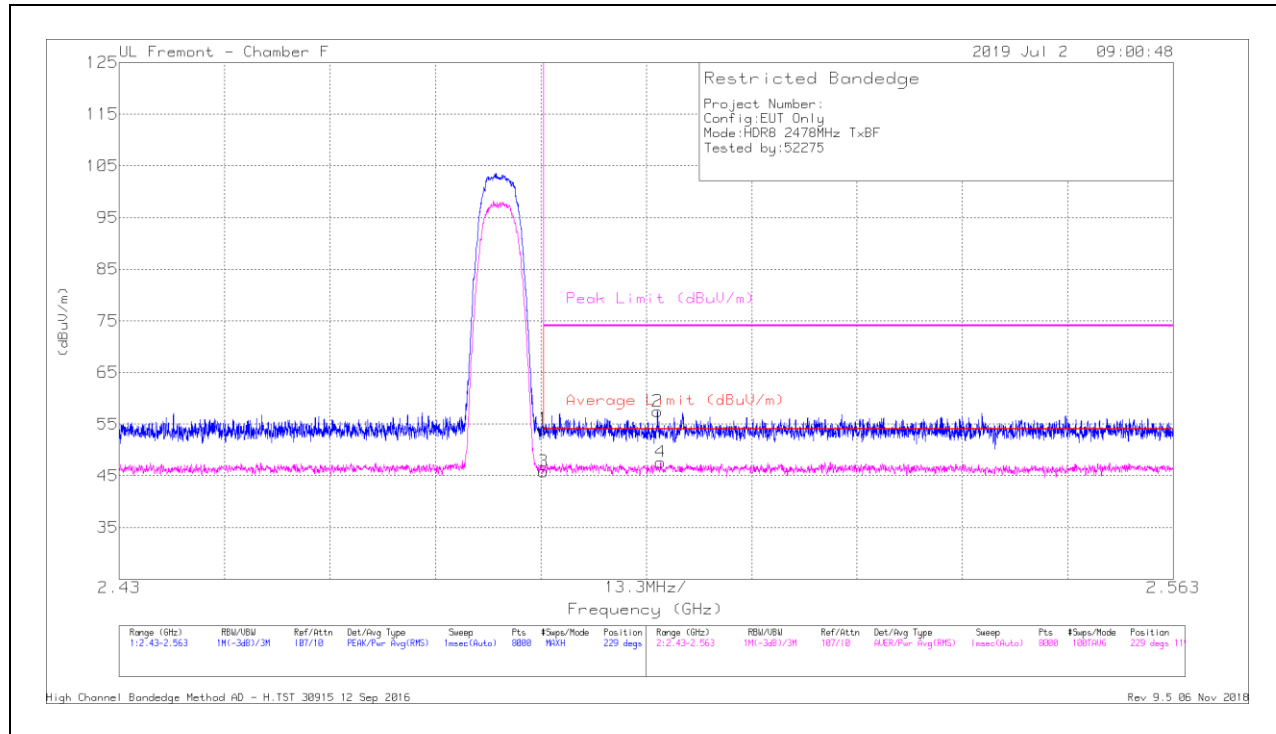


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.41	Pk	32.4	-14.7	54.11	-	-	74	-19.89	229	119	H
2	* 2.498	39.8	Pk	32.4	-14.7	57.5	-	-	74	-16.5	229	119	H
3	* 2.484	28.15	RMS	32.4	-14.7	45.85	54	-8.15	-	-	229	119	H
4	* 2.498	29.95	RMS	32.4	-14.7	47.65	54	-6.35	-	-	229	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

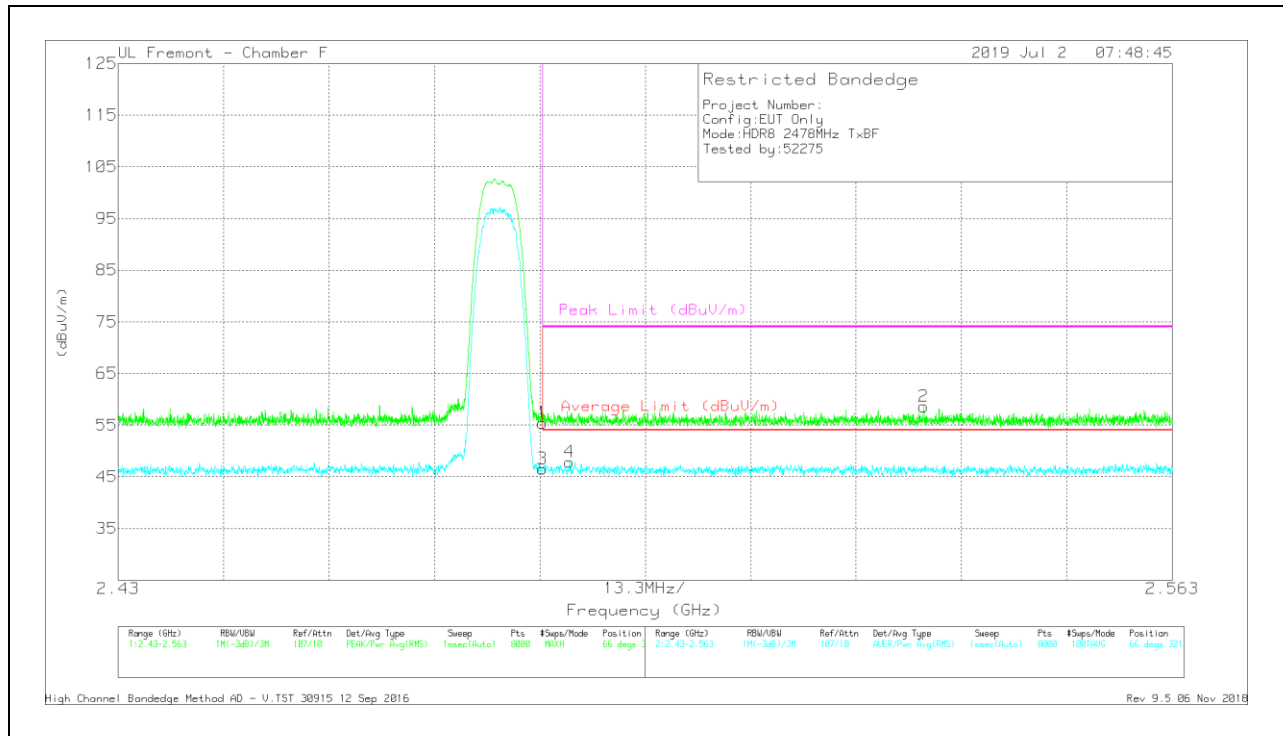

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Ampl/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.75	Pk	32.4	-14.7	55.45	-	-	74	-18.55	66	321	V
2	2.532	40.93	Pk	32.4	-14.7	58.63	-	-	74	-15.37	66	321	V
3	* 2.484	28.83	RMS	32.4	-14.7	46.53	54	-7.47	-	-	66	321	V
4	* 2.487	30.19	RMS	32.3	-14.6	47.89	54	-6.11	-	-	66	321	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

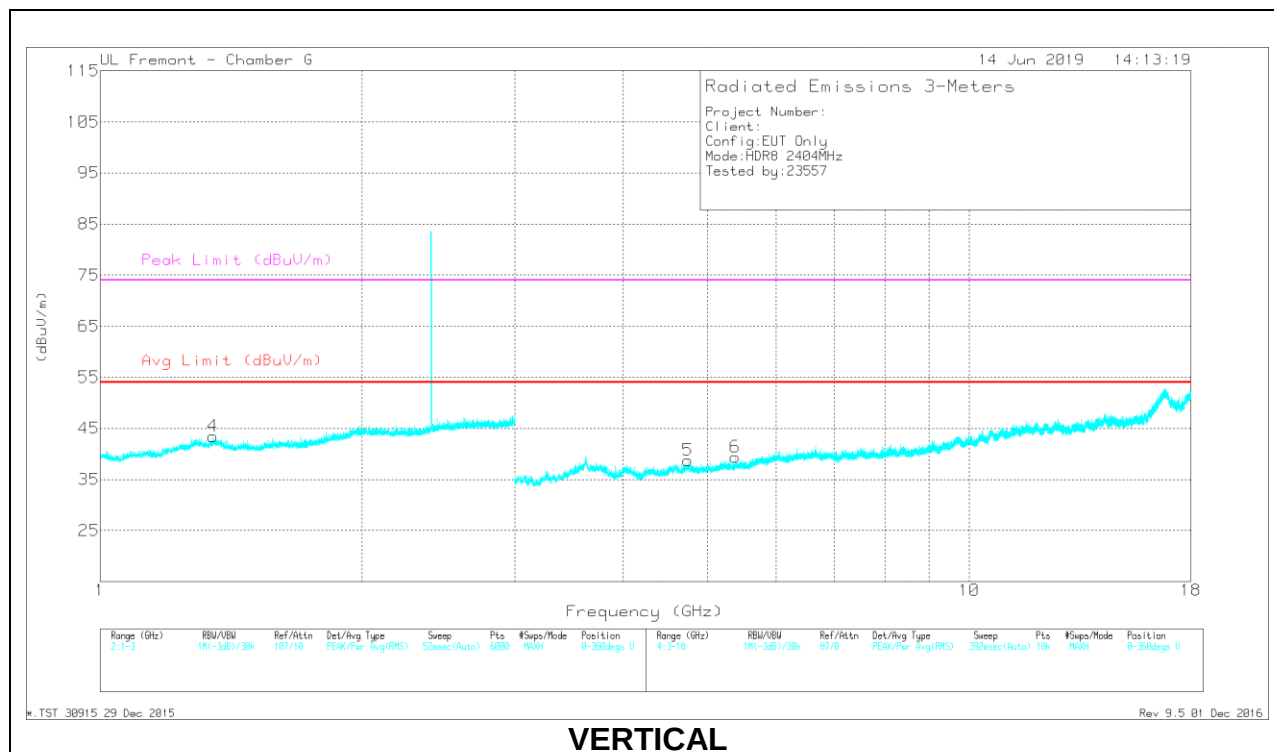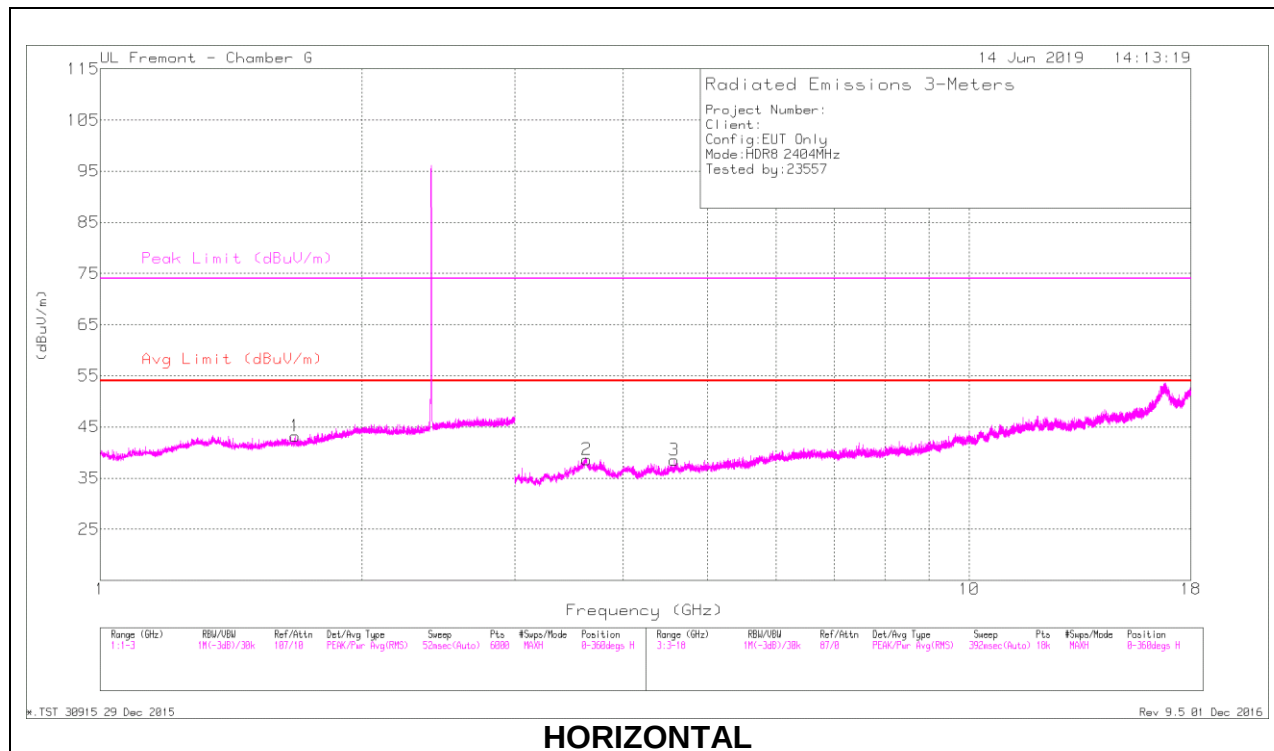

RADIATED EMISSIONS



Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.675	42.68	PK2	28.4	-21.5	49.58	-	-	74	-24.42	131	305	H
	* 1.677	30.81	MAv1	28.3	-21.5	37.61	54	-16.39	-	-	131	305	H
4	* 1.348	43.88	PK2	29.9	-23.3	50.48	-	-	74	-23.52	174	125	V
	* 1.346	31.44	MAv1	29.8	-23.3	37.94	54	-16.06	-	-	174	125	V
2	* 3.632	41.18	PK2	35	-29.7	46.48	-	-	74	-27.52	35	168	H
	* 3.634	28.78	MAv1	34.9	-29.6	34.08	54	-19.92	-	-	35	168	H
3	* 4.576	40.35	PK2	34.2	-29.8	44.75	-	-	74	-29.25	360	140	H
	* 4.577	28.51	MAv1	34.2	-29.8	32.91	54	-21.09	-	-	360	140	H
5	* 4.745	40.97	PK2	34.2	-29.6	45.57	-	-	74	-28.43	25	215	V
	* 4.747	28.84	MAv1	34.2	-29.6	33.44	54	-20.56	-	-	25	215	V
6	* 5.379	39.69	PK2	34.7	-29	45.39	-	-	74	-28.61	217	194	V
	* 5.381	28.2	MAv1	34.7	-29	33.9	54	-20.1	-	-	217	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

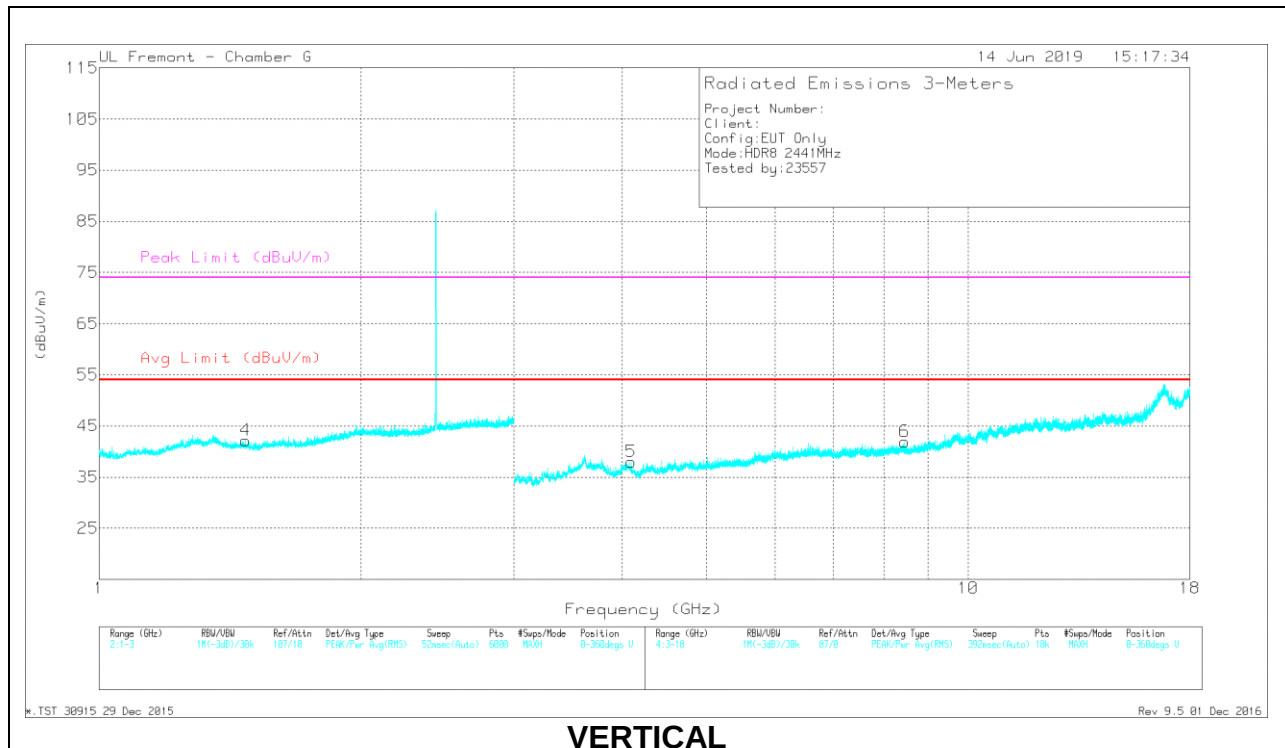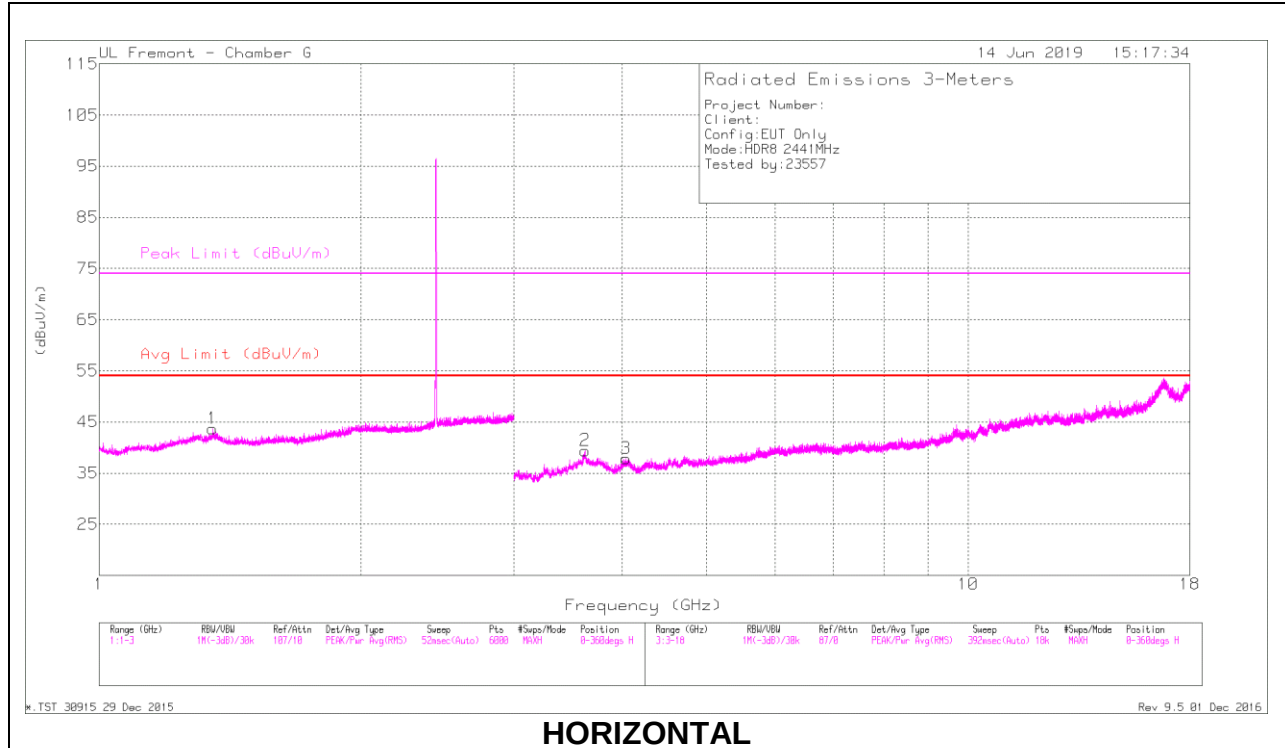

RADIATED EMISSIONS



Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.349	43.77	PK2	29.9	-23.3	50.37	-	-	74	-23.63	214	248	H
1	* 1.349	31.84	MAv1	29.9	-23.3	38.44	54	-15.56	-	-	214	248	H
	* 1.474	44.17	PK2	28.4	-22.4	50.17	-	-	74	-23.83	351	152	V
4	* 1.473	31.83	MAv1	28.4	-22.4	37.83	54	-16.17	-	-	351	152	V
	* 3.628	40.93	PK2	35.2	-29.8	46.33	-	-	74	-27.67	178	217	H
2	* 3.626	29.23	MAv1	35.4	-29.8	34.83	54	-19.17	-	-	178	217	H
	* 4.039	40.16	PK2	33.7	-29.3	44.56	-	-	74	-29.44	112	342	H
3	* 4.038	28.71	MAv1	33.7	-29.4	33.01	54	-20.99	-	-	112	342	H
	* 4.092	40.94	PK2	33.7	-30	44.64	-	-	74	-29.36	272	276	V
5	* 4.095	29.44	MAv1	33.7	-30	33.14	54	-20.86	-	-	272	276	V
	* 8.458	38.04	PK2	36.1	-26.2	47.94	-	-	74	-26.06	281	229	V
6	* 8.456	26.4	MAv1	36.1	-26.2	36.3	54	-17.7	-	-	281	229	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

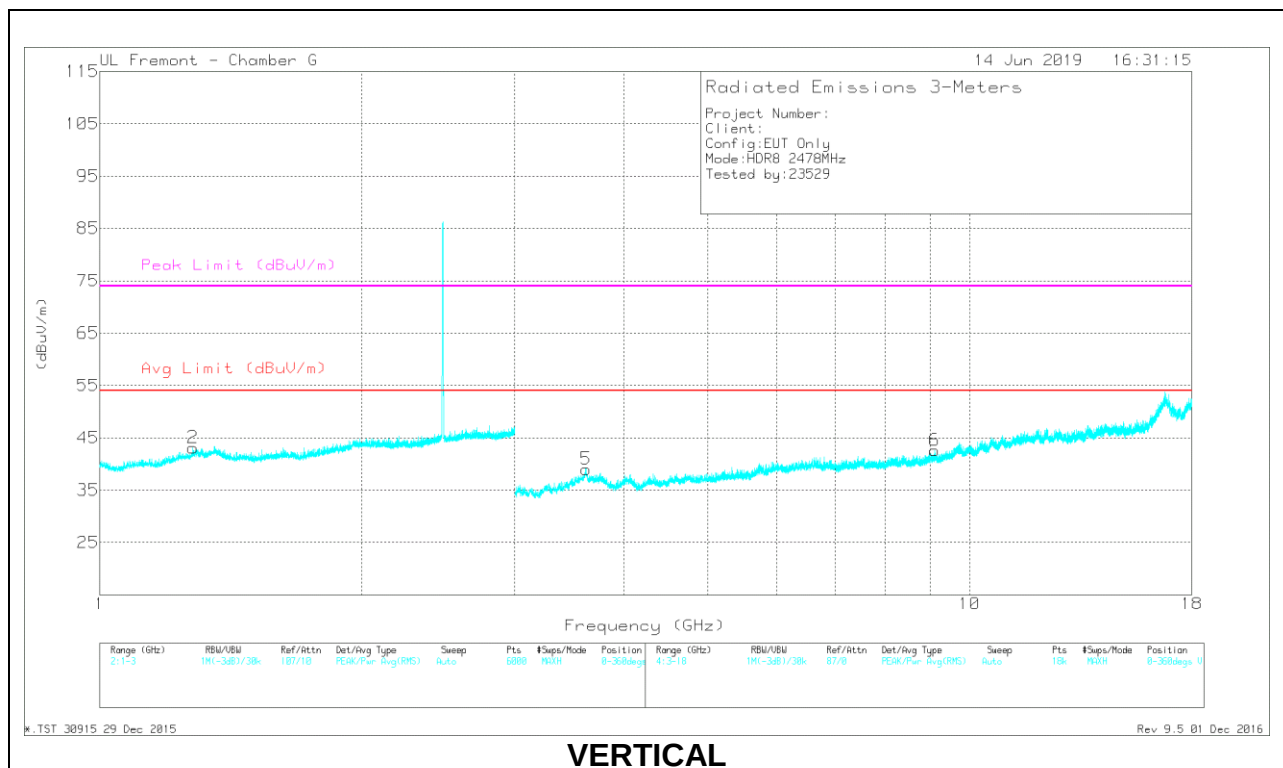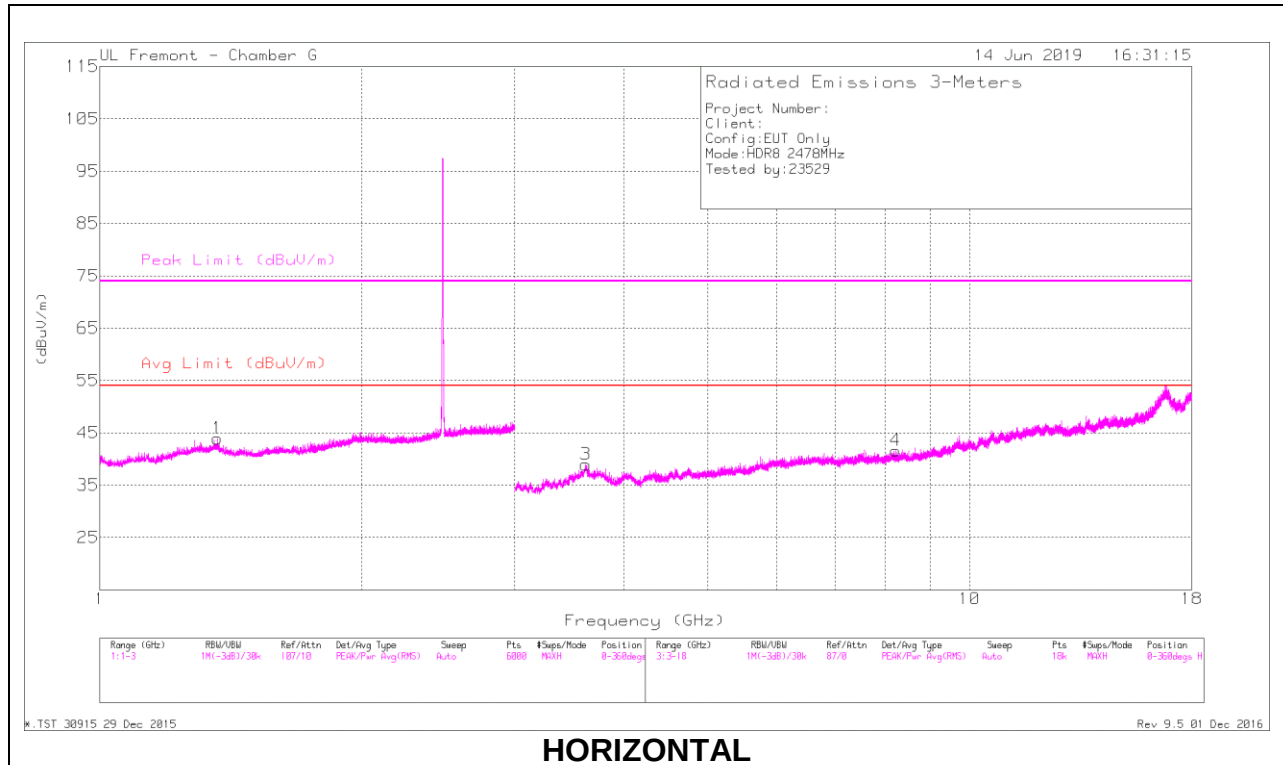

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.366	44.69	PK2	30	-23.2	51.49	-	-	74	-22.51	108	216	H
	* 1.364	31.67	MAV1	30	-23.2	38.47	54	-	-	-	108	242	H
								15.53					
2	* 1.28	43.96	PK2	29.8	-23.6	50.16	-	-	74	-23.84	10	174	V
	* 1.279	32.42	MAV1	29.8	-23.6	38.62	54	-	-	-	10	174	V
								15.38					
3	* 3.619	40.72	PK2	35.7	-30	46.42	-	-	74	-27.58	216	237	H
	* 3.619	29.71	MAV1	35.7	-30.1	35.31	54	-	-	-	216	237	H
								18.69					
4	* 8.222	38.72	PK2	36.2	-26.6	48.32	-	-	74	-25.68	198	169	H
	* 8.222	27.28	MAV1	36.2	-26.6	36.88	54	-	-	-	198	169	H
								17.12					
5	* 3.623	41.58	PK2	35.6	-29.9	47.28	-	-	74	-26.72	71	208	V
	* 3.622	29.67	MAV1	35.7	-29.9	35.47	54	-	-	-	71	208	V
								18.53					
6	* 9.122	38.19	PK2	36.5	-25.6	49.09	-	-	74	-24.91	190	275	V
	* 9.125	26.89	MAV1	36.5	-25.6	37.79	54	-	-	-	190	275	V
								16.21					



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

9.3. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

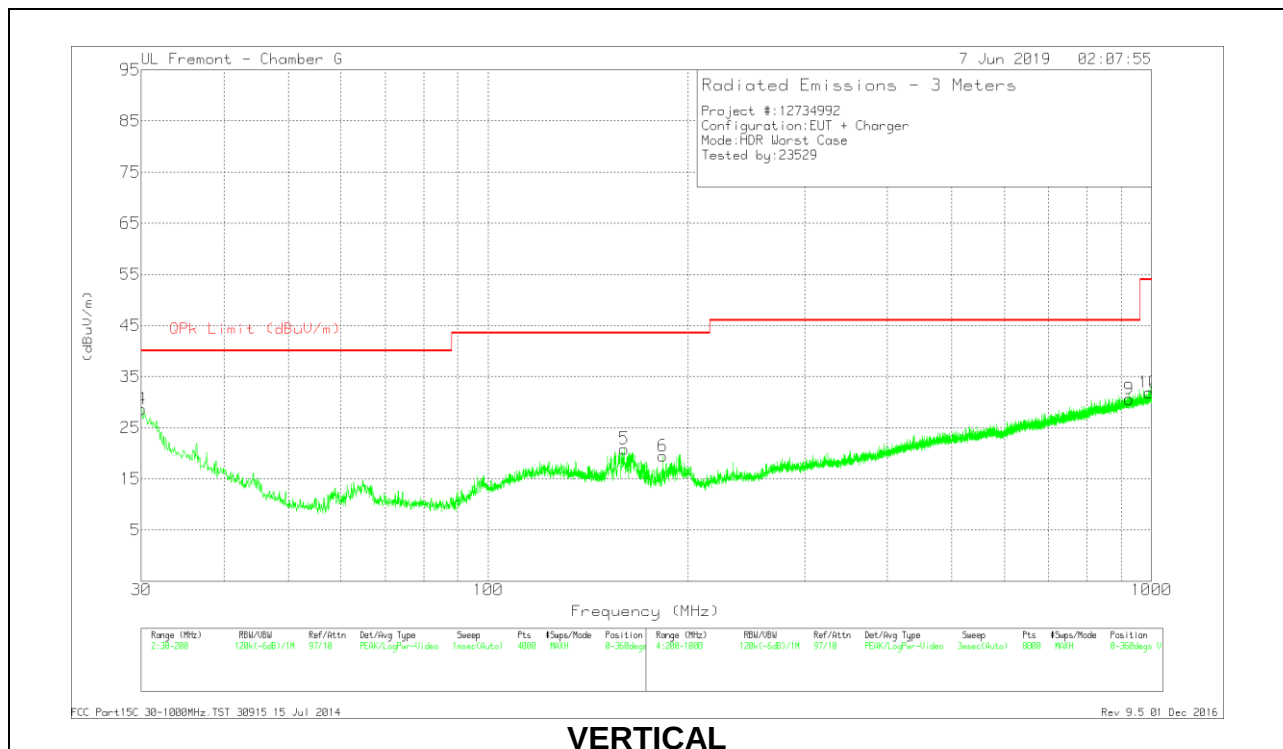
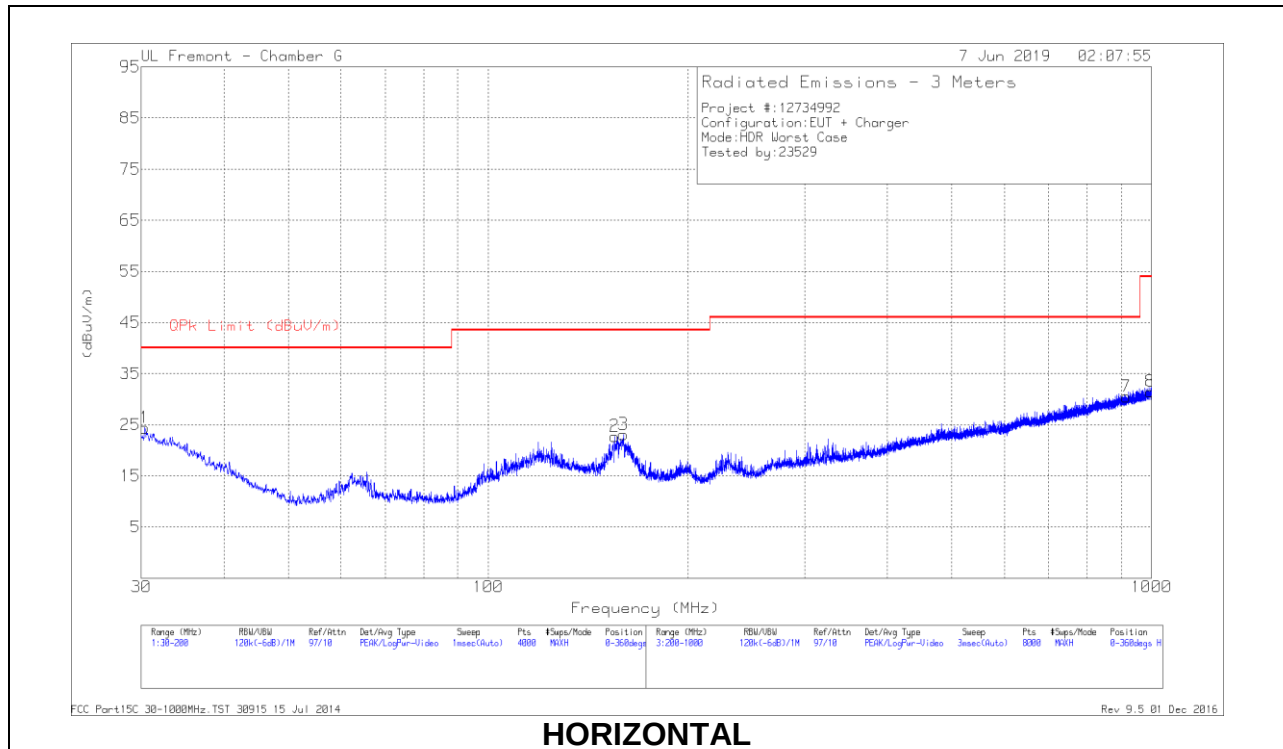


Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
8	* 995.9035	27.17	Pk	29.2	-24.9	31.47	53.97	-22.5	0-360	400	H
10	* 991.5029	27.56	Pk	29.2	-24.9	31.86	53.97	-22.11	0-360	200	V
4	30.0425	33.35	Pk	26.5	-31.2	28.65	40	-11.35	0-360	100	V
1	30.3826	29.12	Pk	26.5	-31.2	24.42	40	-15.58	0-360	400	H
2	155.1524	34.45	Pk	18.2	-29.9	22.75	43.52	-20.77	0-360	200	H
3	159.9561	34.92	Pk	18.1	-29.9	23.12	43.52	-20.4	0-360	200	H
5	160.3812	32.57	Pk	18.1	-29.8	20.87	43.52	-22.65	0-360	100	V
6	183.2522	32.15	Pk	17	-29.7	19.45	43.52	-24.07	0-360	100	V
7	915.693	28.09	Pk	28.3	-25.9	30.49	46.02	-15.53	0-360	200	H
9	924.8942	28.04	Pk	28.3	-25.7	30.64	46.02	-15.38	0-360	100	V

9.4. WORST CASE 18-26 GHZ

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

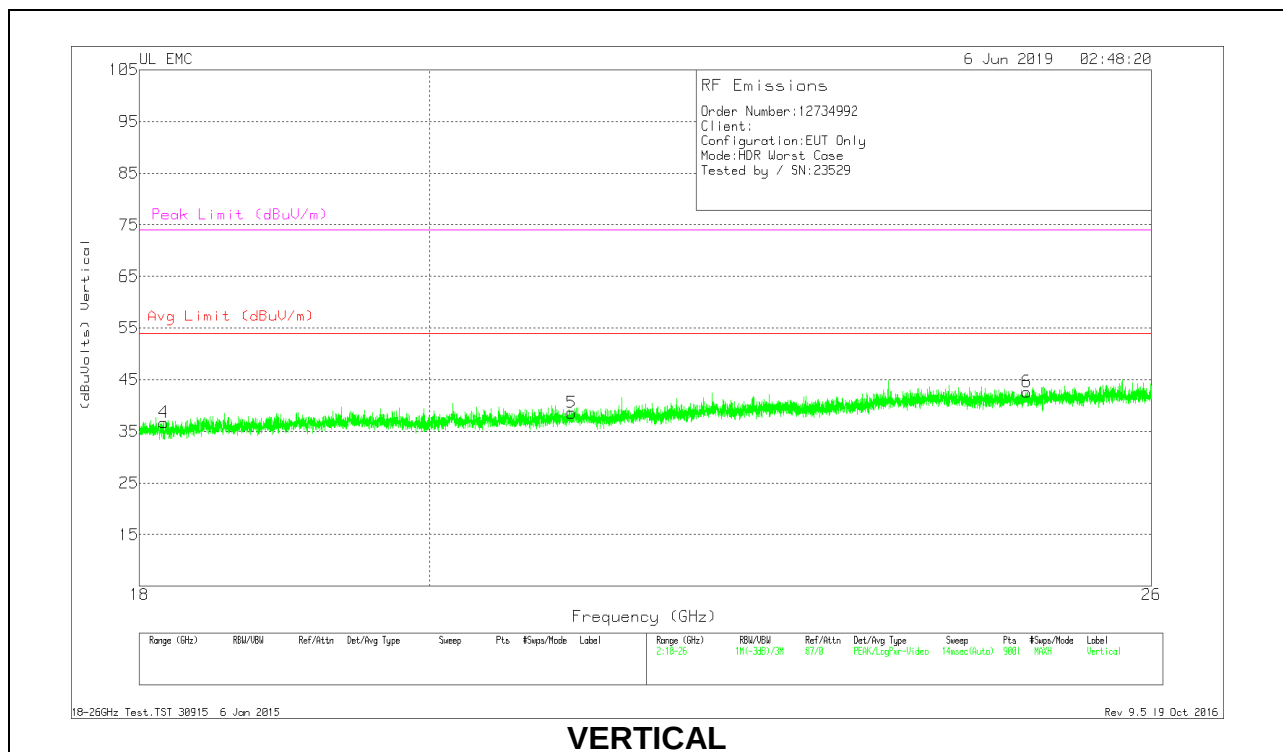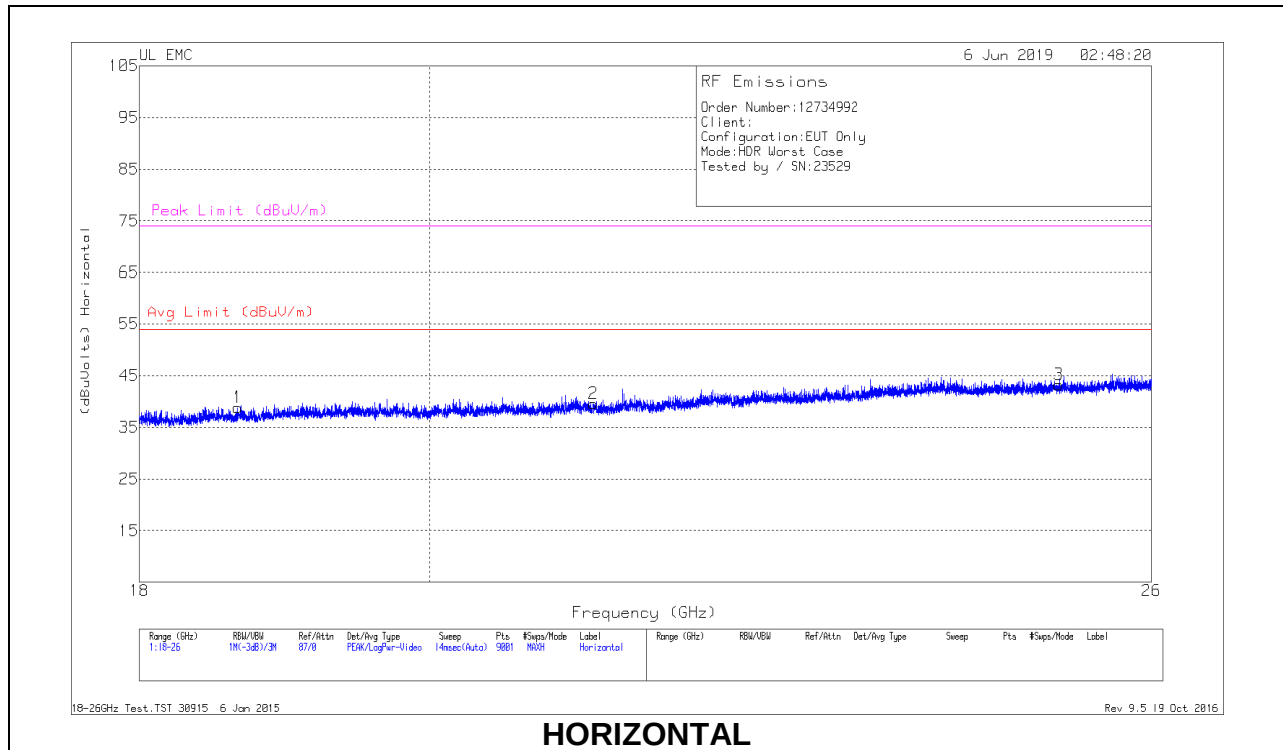

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.654	37.68	Pk	32.4	-21.8	-9.5	38.78	54	-15.22	74	-35.22
2	21.228	37.28	Pk	33	-21.2	-9.5	39.58	54	-14.42	74	-34.42
3	25.139	38.08	Pk	34.5	-19.8	-9.5	43.28	54	-10.72	74	-30.72
4	18.159	36.26	Pk	32.3	-22.4	-9.5	36.66	54	-17.34	74	-37.34
5	21.059	36.09	Pk	33.1	-21.1	-9.5	38.59	54	-15.41	74	-35.41
6	24.848	37.2	Pk	34.4	-19.5	-9.5	42.6	54	-11.4	74	-31.4

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

RESULTS


10.1.1. AC Power Line Host

LINE 1 RESULTS

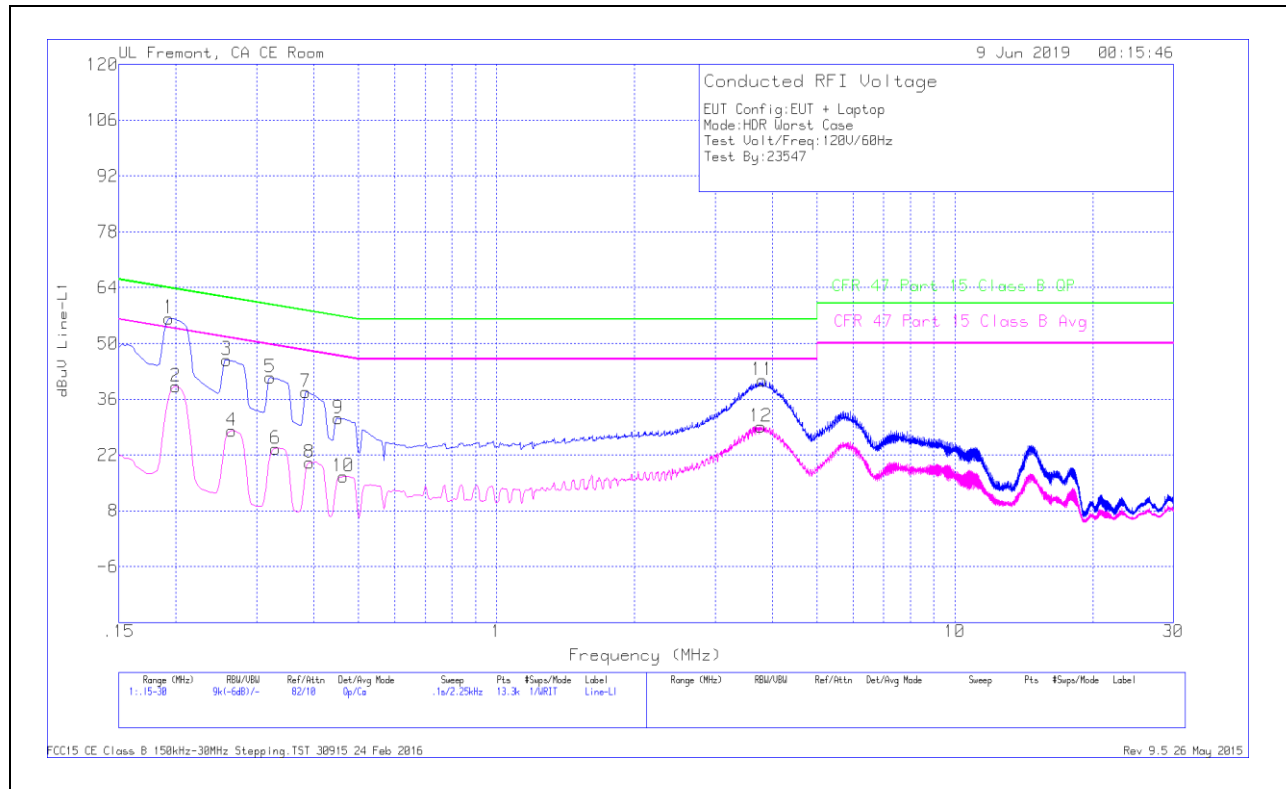

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.19275	46.24	Qp	0	0	10.1	56.34	63.92	-7.58	-	-
2	.1995	29.05	Ca	0	0	10.1	39.15	-	-	53.63	-14.48
3	.258	35.81	Qp	0	0	10.1	45.91	61.5	-15.59	-	-
4	.26475	17.94	Ca	0	0	10.1	28.04	-	-	51.28	-23.24
5	.321	31.37	Qp	0	0	10.1	41.47	59.68	-18.21	-	-
6	.33	13.55	Ca	0	0	10.1	23.65	-	-	49.45	-25.8
7	.384	27.8	Qp	0	0	10.1	37.9	58.19	-20.29	-	-
8	.39075	9.97	Ca	0	0	10.1	20.07	-	-	48.05	-27.98
9	.4515	21.18	Qp	0	0	10.1	31.28	56.85	-25.57	-	-
10	.46275	6.48	Ca	0	0	10.1	16.58	-	-	46.64	-30.06
11	3.80175	30.58	Qp	0	.1	10.1	40.78	56	-15.22	-	-
12	3.77475	18.94	Ca	0	.1	10.1	29.14	-	-	46	-16.86


LINE 2 RESULTS

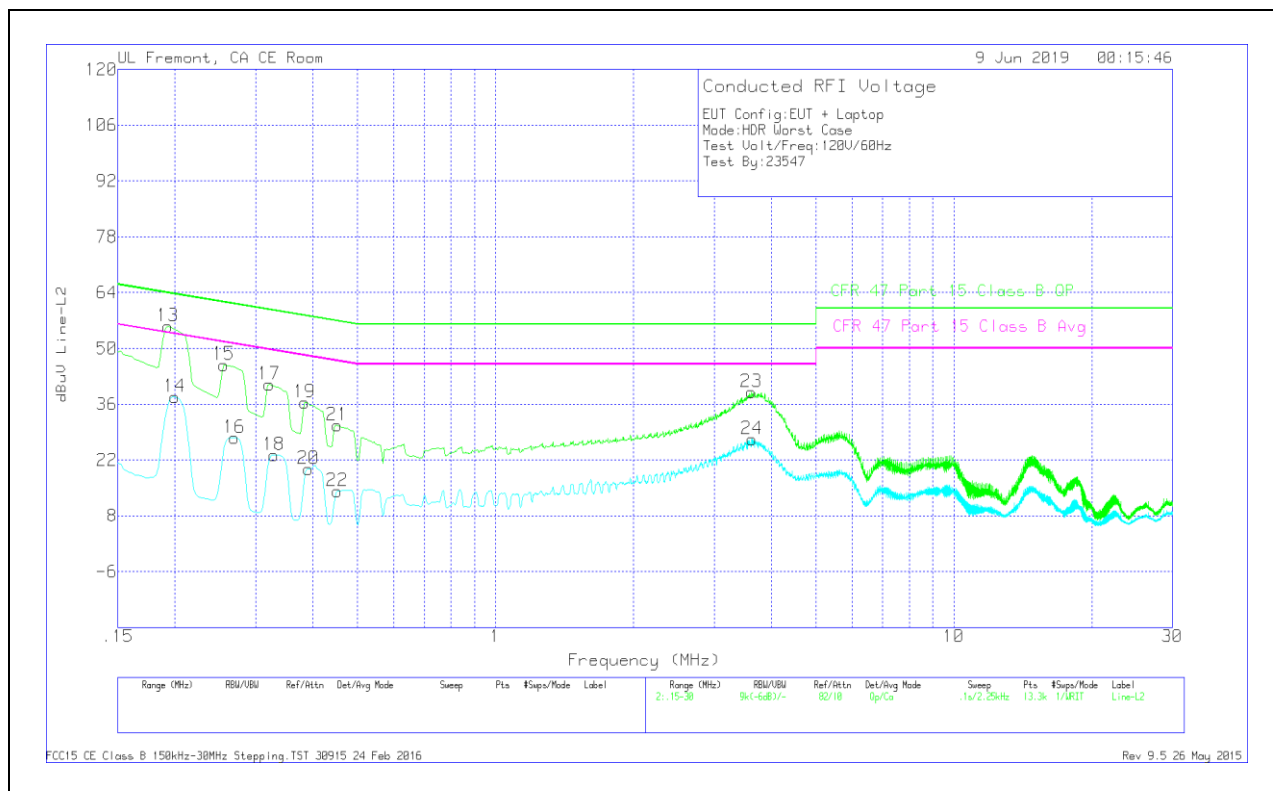

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.19275	45.53	Qp	0	0	10.1	55.63	63.92	-8.29	-	-
14	.1995	27.73	Ca	0	0	10.1	37.83	-	-	53.63	-15.8
15	.25575	35.81	Qp	0	0	10.1	45.91	61.57	-15.66	-	-
16	.26925	17.53	Ca	0	0	10.1	27.63	-	-	51.14	-23.51
17	.321	30.88	Qp	0	0	10.1	40.98	59.68	-18.7	-	-
18	.32887	13.18	Ca	0	0	10.1	23.28	-	-	49.48	-26.2
19	.384	26.33	Qp	0	0	10.1	36.43	58.19	-21.76	-	-
20	.39075	9.64	Ca	0	0	10.1	19.74	-	-	48.05	-28.31
21	.4515	20.65	Qp	0	0	10.1	30.75	56.85	-26.1	-	-
22	.4515	4.13	Ca	0	0	10.1	14.23	-	-	46.85	-32.62
23	3.62175	28.85	Qp	0	.1	10.1	39.05	56	-16.95	-	-
24	3.633	17.06	Ca	0	.1	10.1	27.26	-	-	46	-18.74


10.1.2. AC Power Line Norm

LINE 1 RESULTS

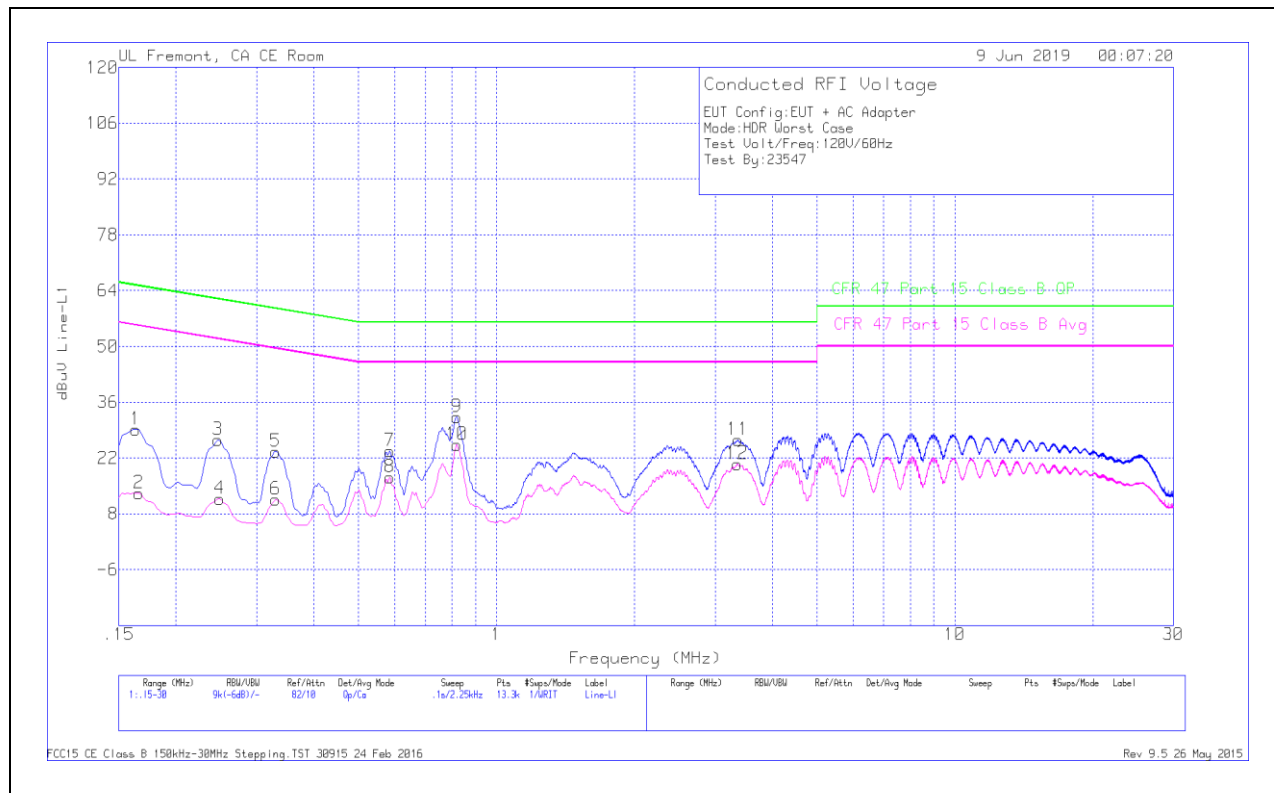

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.1635	19.01	Qp	.1	0	10.1	29.21	65.28	-36.07	-	-
2	.16575	3.02	Ca	.1	0	10.1	13.22	-	-	55.17	-41.95
3	.24675	16.38	Qp	0	0	10.1	26.48	61.87	-35.39	-	-
4	.249	1.69	Ca	0	0	10.1	11.79	-	-	51.79	-40
5	.33	13.55	Qp	0	0	10.1	23.65	59.45	-35.8	-	-
6	.33	1.54	Ca	0	0	10.1	11.64	-	-	49.45	-37.81
7	.58425	13.61	Qp	0	0	10.1	23.71	56	-32.29	-	-
8	.58425	7.03	Ca	0	0	10.1	17.13	-	-	46	-28.87
9	.8205	22.17	Qp	0	0	10.1	32.27	56	-23.73	-	-
10	.8205	15.2	Ca	0	0	10.1	25.3	-	-	46	-20.7
11	3.3675	16.33	Qp	0	.1	10.1	26.53	56	-29.47	-	-
12	3.3585	10.33	Ca	0	.1	10.1	20.53	-	-	46	-25.47

LINE 2 RESULTS

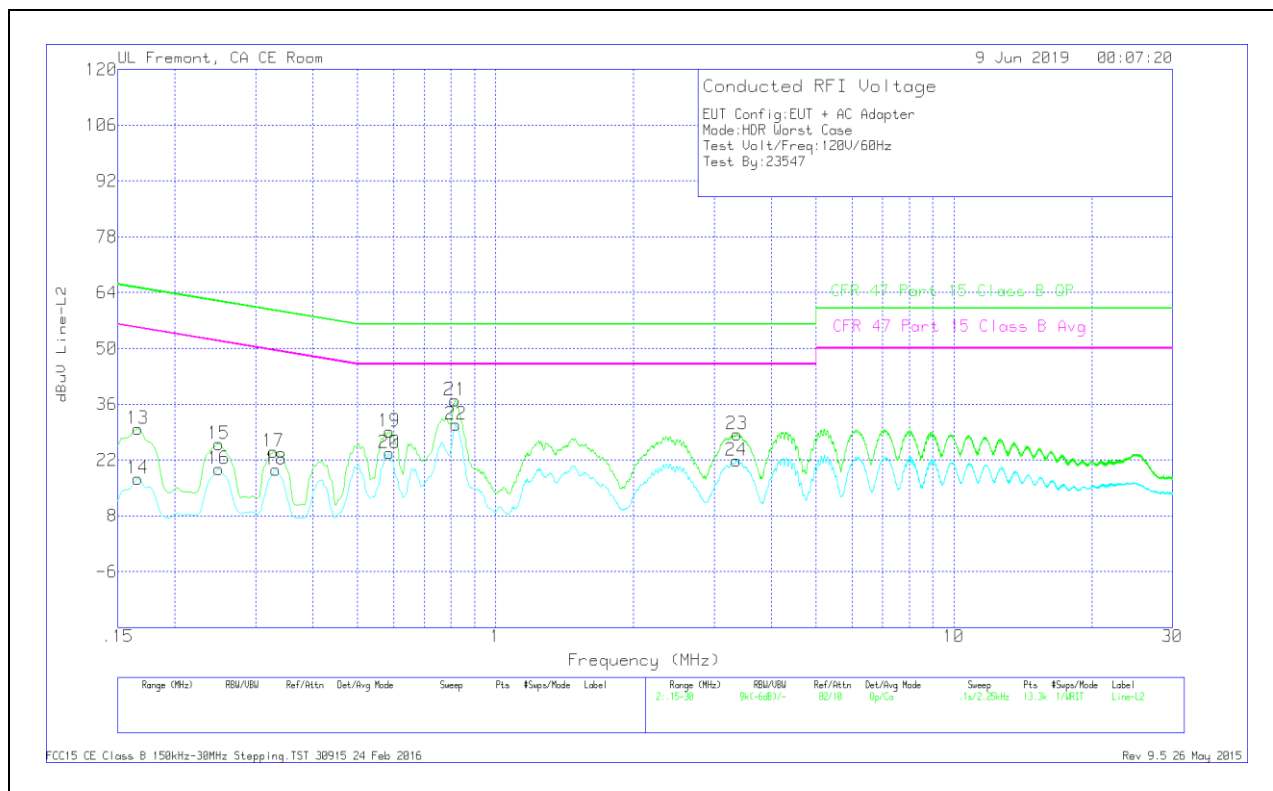

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.16575	19.66	Qp	.1	0	10.1	29.86	65.17	-35.31	-	-
14	.16575	7.13	Ca	.1	0	10.1	17.33	-	-	55.17	-37.84
15	.249	15.97	Qp	0	0	10.1	26.07	61.79	-35.72	-	-
16	.249	9.7	Ca	0	0	10.1	19.8	-	-	51.79	-31.99
17	.32775	13.96	Qp	0	0	10.1	24.06	59.51	-35.45	-	-
18	.33225	9.44	Ca	0	0	10.1	19.54	-	-	49.39	-29.85
19	.5865	19.09	Qp	0	0	10.1	29.19	56	-26.81	-	-
20	.5865	13.68	Ca	0	0	10.1	23.78	-	-	46	-22.22
21	.816	26.84	Qp	0	0	10.1	36.94	56	-19.06	-	-
22	.8205	20.81	Ca	0	0	10.1	30.91	-	-	46	-15.09
23	3.36188	18.32	Qp	0	.1	10.1	28.52	56	-27.48	-	-
24	3.35175	11.66	Ca	0	.1	10.1	21.86	-	-	46	-24.14

11. SETUP PHOTOS

Please refer to 12901678-EP1V1 Setup Photos_Report for setup photos.

END OF TEST REPORT