


VERTICAL RESULT

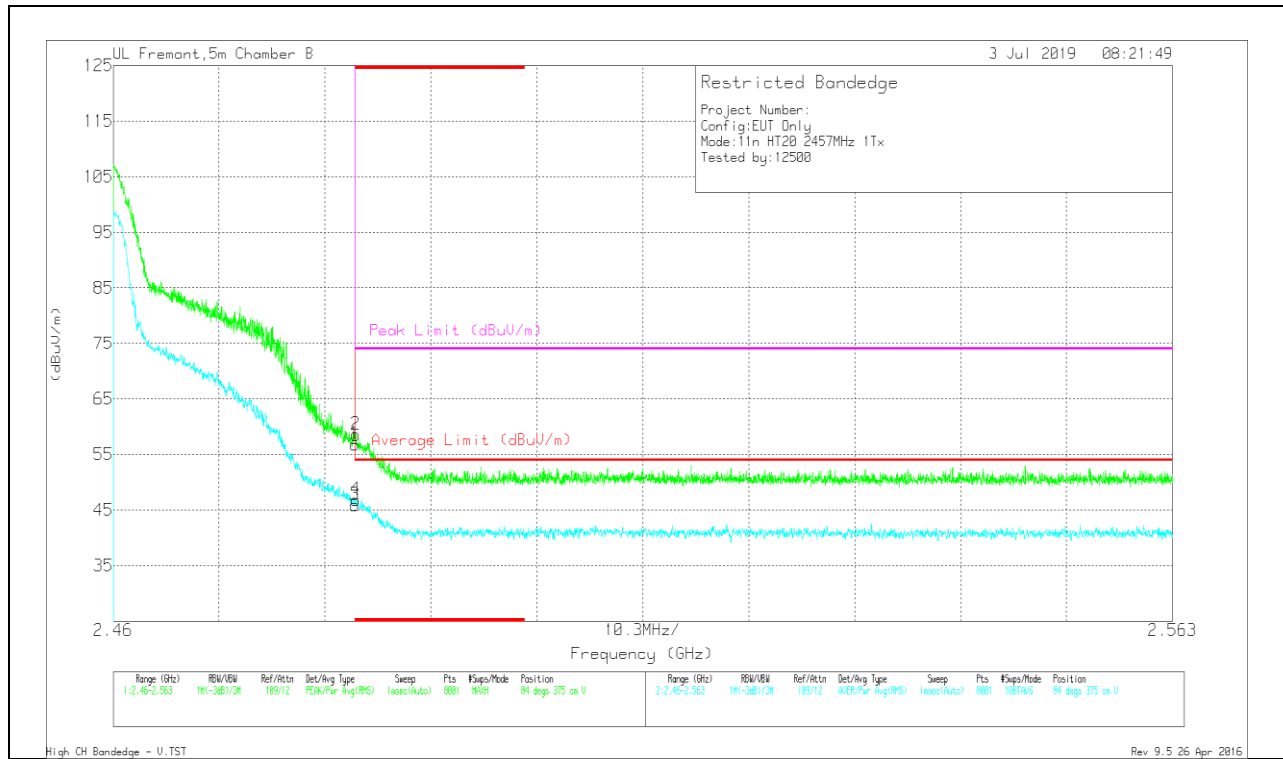

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.44	Pk	32.3	-18.9	56.84	-	-	74	-17.16	84	375	V
2	* 2.484	45.21	Pk	32.3	-18.9	58.61	-	-	74	-15.39	84	375	V
3	* 2.484	32.54	RMS	32.3	-18.9	45.94	54	-8.06	-	-	84	375	V
4	* 2.484	33.43	RMS	32.3	-18.9	46.83	54	-7.17	-	-	84	375	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

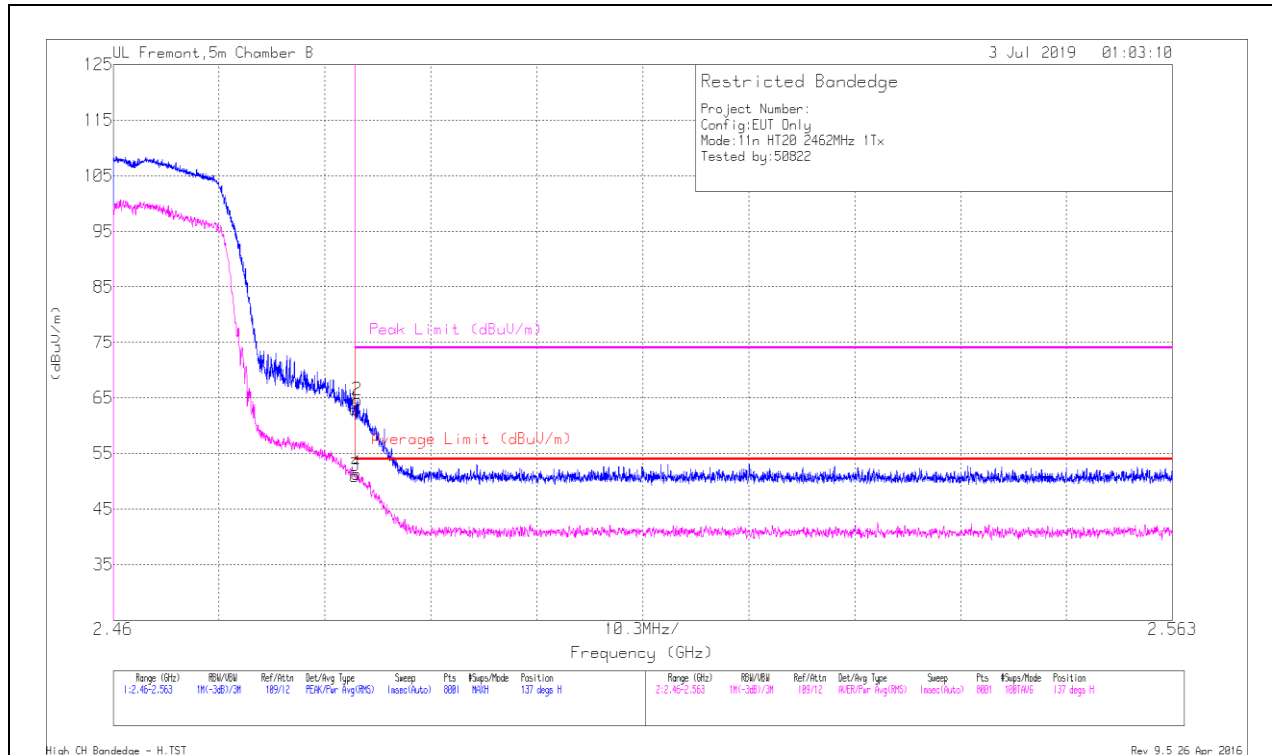

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	49.53	Pk	32.3	-18.9	62.93	-	-	74	-11.07	137	143	H
2	2.484	51.22	Pk	32.3	-18.9	64.62	-	-	74	-9.38	137	143	H
3	2.484	37.6	RMS	32.3	-18.9	51	54	-3	-	-	137	143	H
4	2.484	37.96	RMS	32.3	-18.9	51.36	54	-2.64	-	-	137	143	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

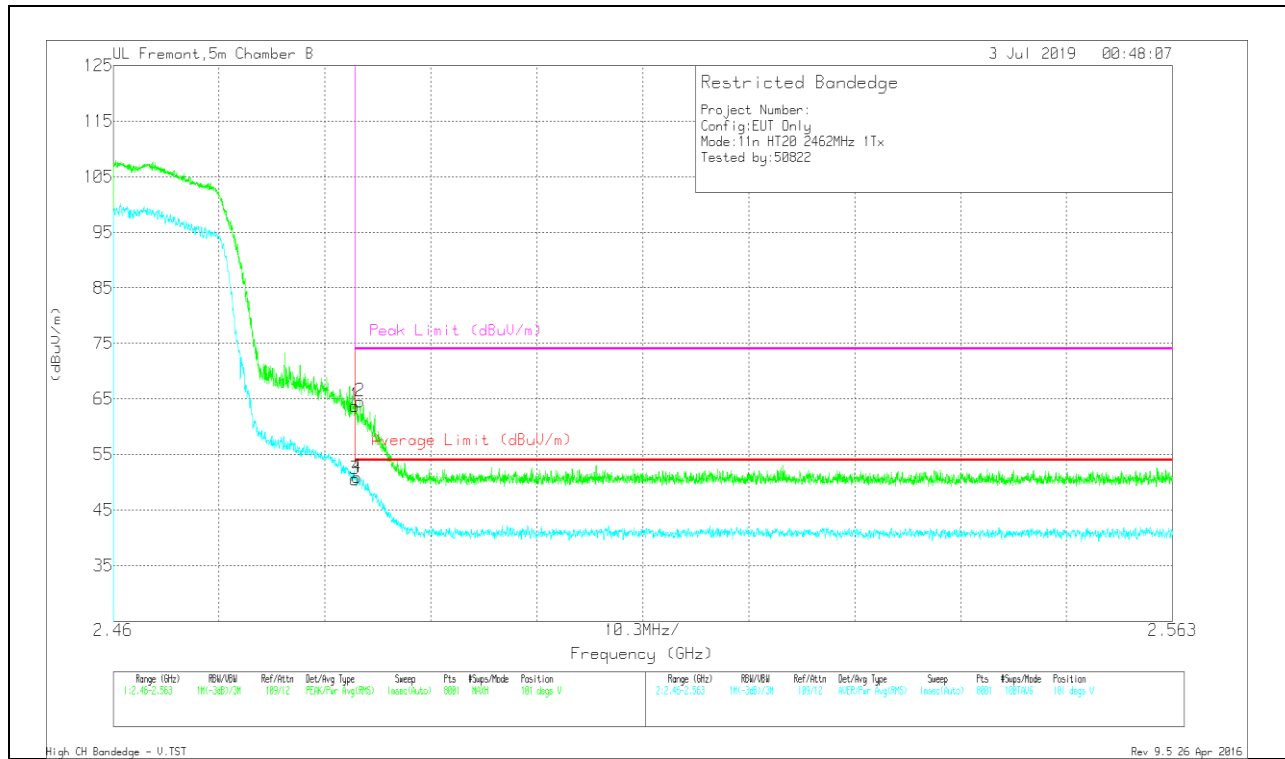


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	50.33	Pk	32.3	-18.9	63.73	-	-	74	-10.27	101	369	V
2	2.484	51.14	Pk	32.3	-18.9	64.54	-	-	74	-9.46	101	369	V
3	2.484	37.18	RMS	32.3	-18.9	50.58	54	-3.42	-	-	101	369	V
4	2.484	37.52	RMS	32.3	-18.9	50.92	54	-3.08	-	-	101	369	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

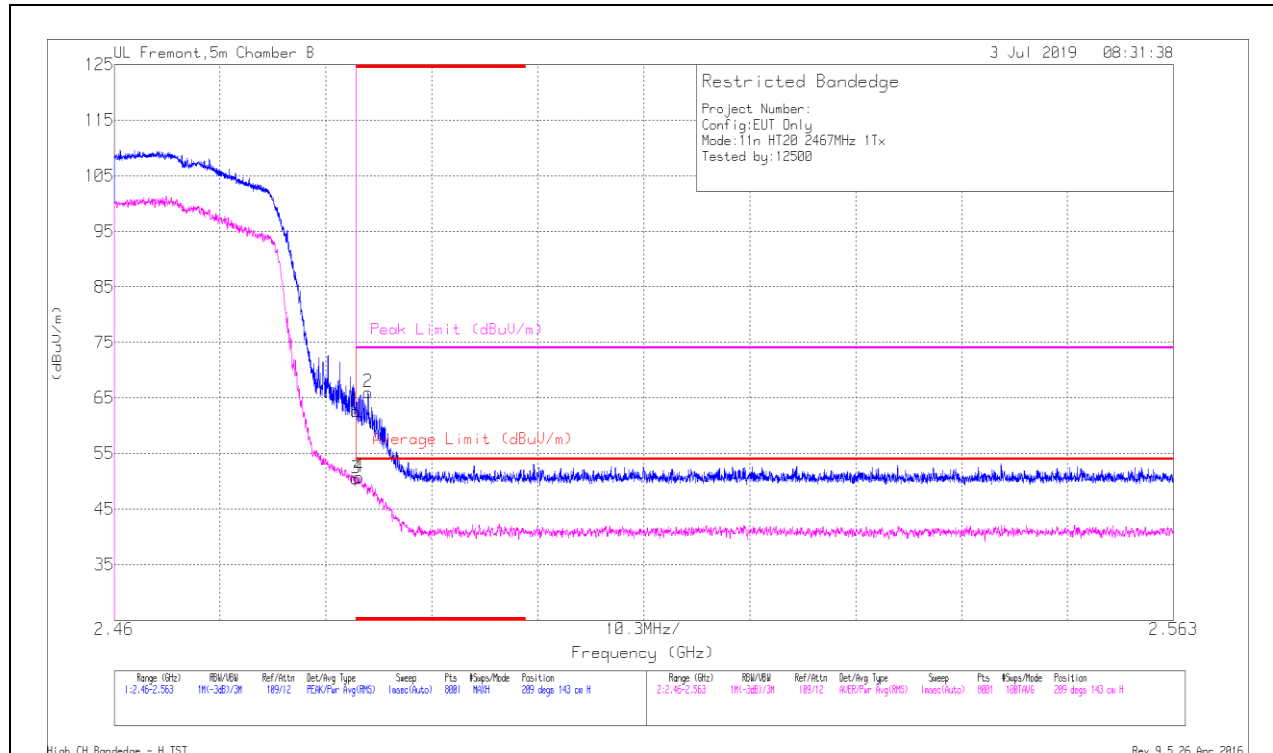


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.25	Pk	32.3	-18.9	62.65	-	-	74	-11.35	209	143	H
2	* 2.485	52.63	Pk	32.3	-18.9	66.03	-	-	74	-7.97	209	143	H
3	* 2.484	37.1	RMS	32.3	-18.9	50.5	54	-3.5	-	-	209	143	H
4	* 2.484	37.38	RMS	32.3	-18.9	50.78	54	-3.22	-	-	209	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

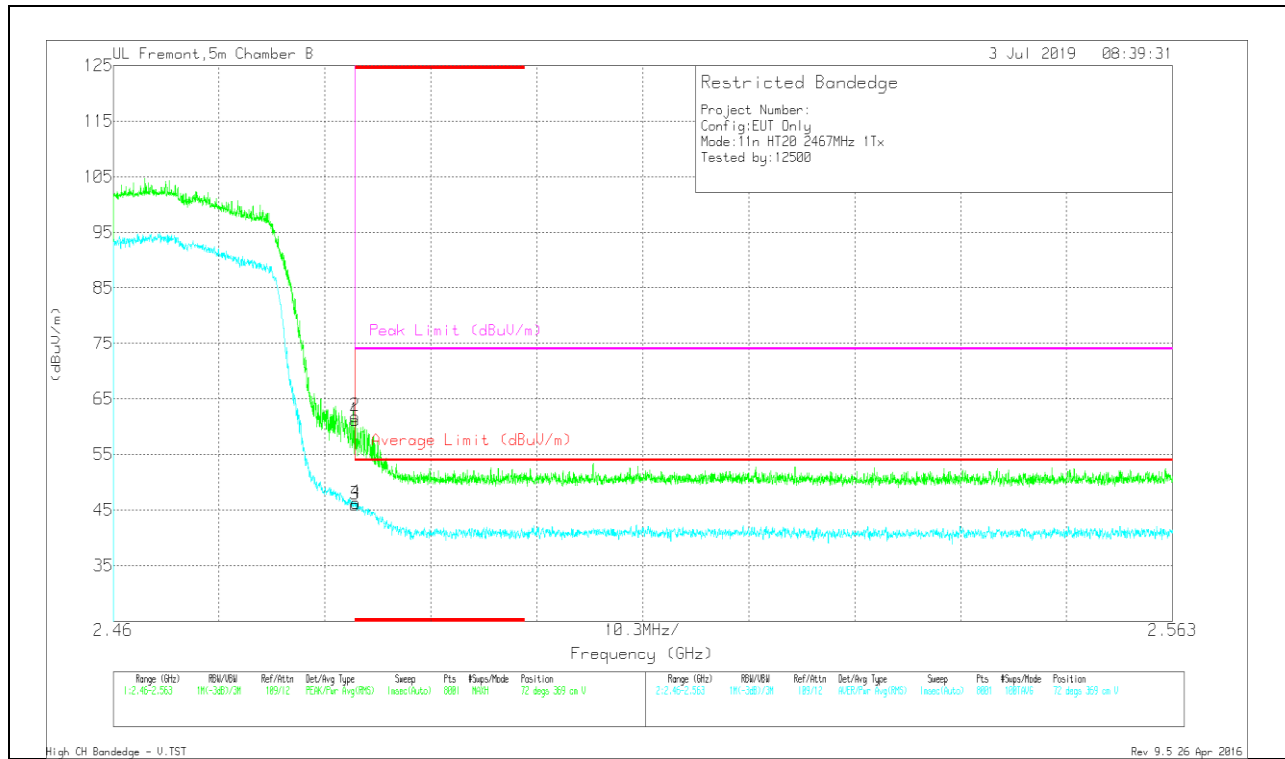

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.78	Pk	32.3	-18.9	61.18	-	-	74	-12.82	72	369	V
2	* 2.484	48.46	Pk	32.3	-18.9	61.86	-	-	74	-12.14	72	369	V
3	* 2.484	32.62	RMS	32.3	-18.9	46.02	54	-7.98	-	-	72	369	V
4	* 2.484	32.91	RMS	32.3	-18.9	46.31	54	-7.69	-	-	72	369	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

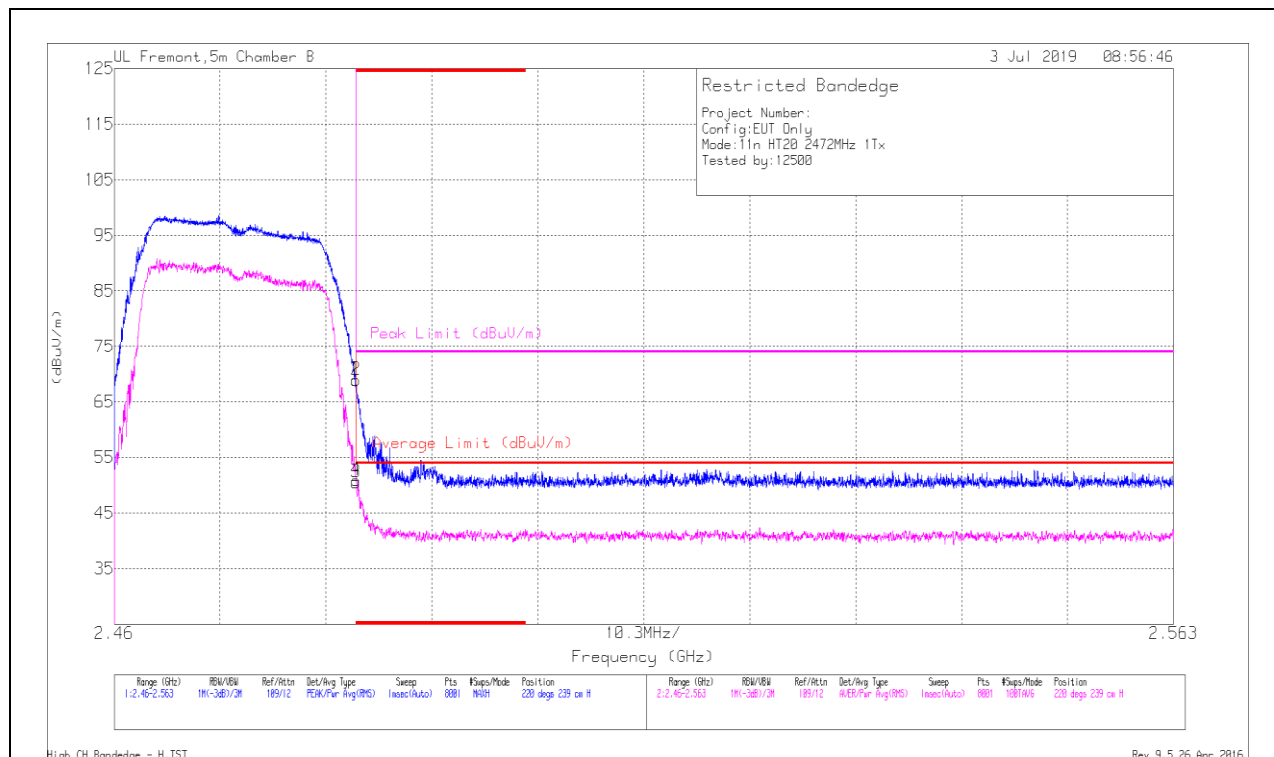


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.55	Pk	32.3	-18.9	68.95	-	-	74	-5.05	220	239	H
2	* 2.484	55.57	Pk	32.3	-18.9	68.97	-	-	74	-5.03	220	239	H
3	* 2.484	37.17	RMS	32.3	-18.9	50.57	54	-3.43	-	-	220	239	H
4	* 2.484	37.53	RMS	32.3	-18.9	50.93	54	-3.07	-	-	220	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

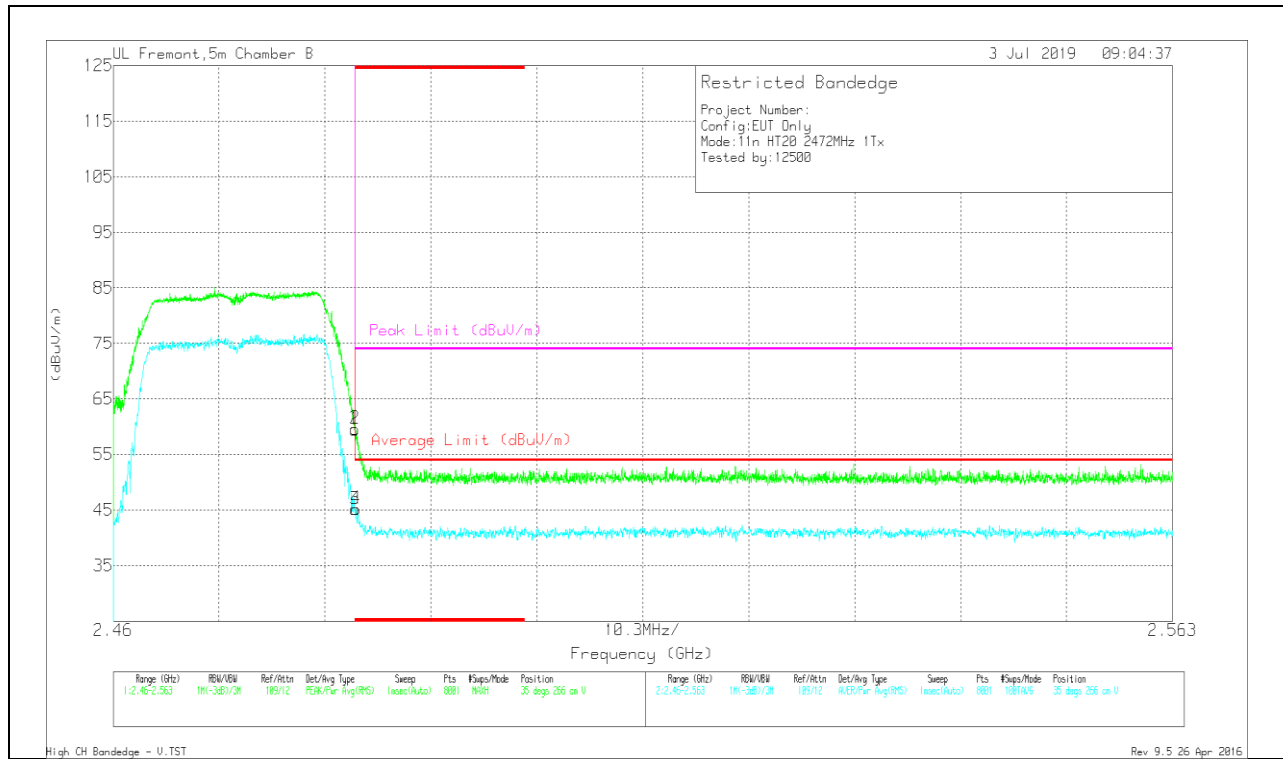

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.15	Pk	32.3	-18.9	59.55	-	-	74	-14.45	35	266	V
2	* 2.484	46.19	Pk	32.3	-18.9	59.59	-	-	74	-14.41	35	266	V
3	* 2.484	31.75	RMS	32.3	-18.9	45.15	54	-8.85	-	-	35	266	V
4	* 2.484	31.78	RMS	32.3	-18.9	45.18	54	-8.82	-	-	35	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 3 MODE

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

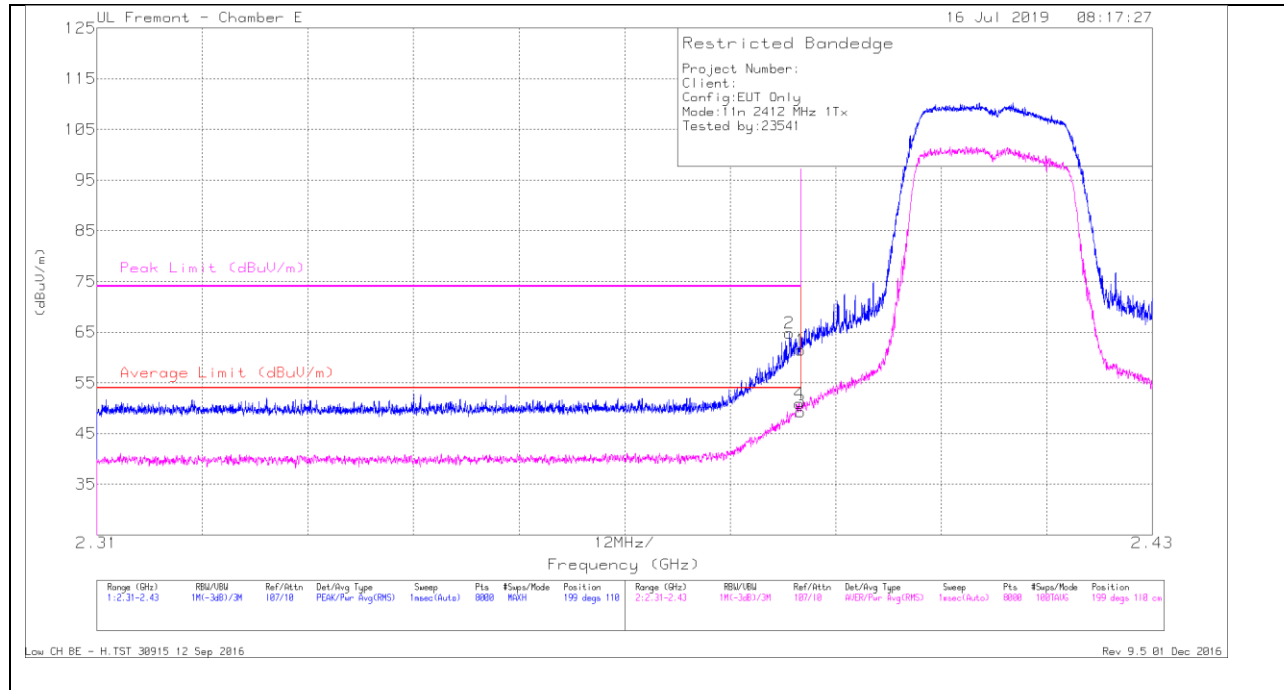


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.36	Pk	32.3	-26.2	61.46	-	-	74	-12.54	199	110	H
2	* 2.389	58.69	Pk	32.3	-26.2	64.79	-	-	74	-9.21	199	110	H
3	* 2.39	43.26	RMS	32.3	-26.2	49.36	54	-4.64	-	-	199	110	H
4	* 2.39	44.85	RMS	32.3	-26.2	50.95	54	-3.05	-	-	199	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

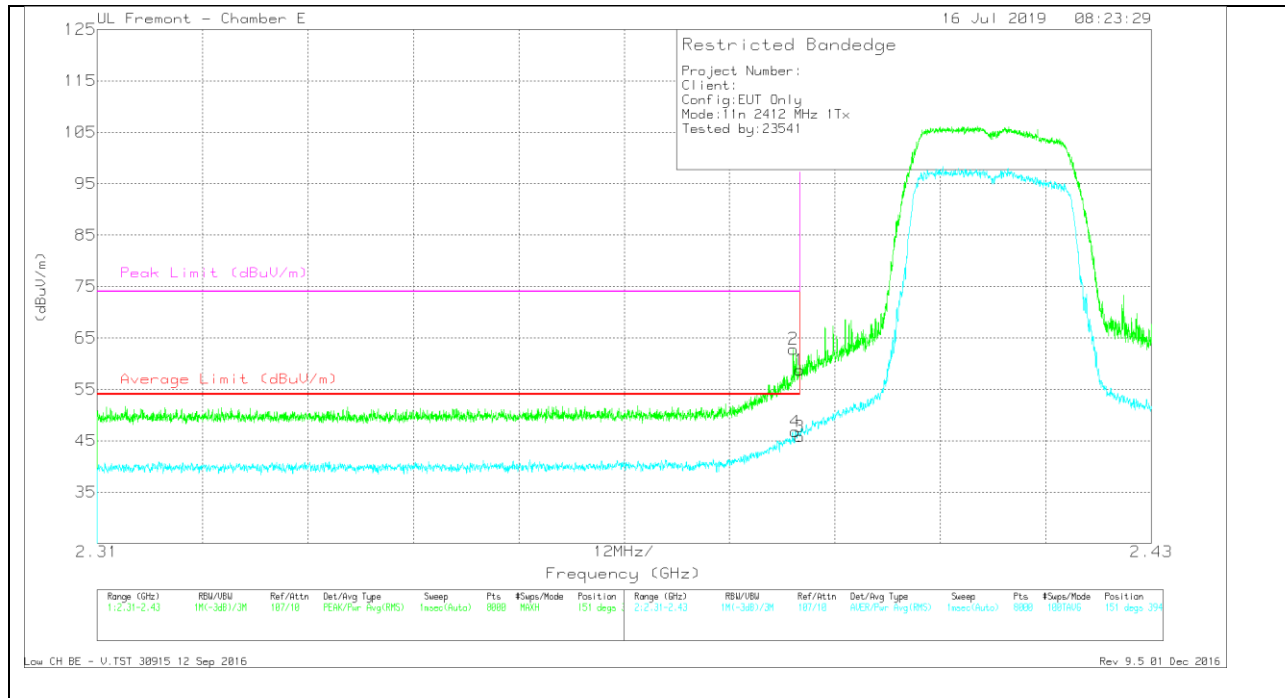

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.63	Pk	32.3	-26.2	58.73	-	-	74	-15.27	151	394	V
2	* 2.389	56.72	Pk	32.3	-26.2	62.82	-	-	74	-11.18	151	394	V
3	* 2.39	39.68	RMS	32.3	-26.2	45.78	54	-8.22	-	-	151	394	V
4	* 2.389	40.67	RMS	32.3	-26.2	46.77	54	-7.23	-	-	151	394	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

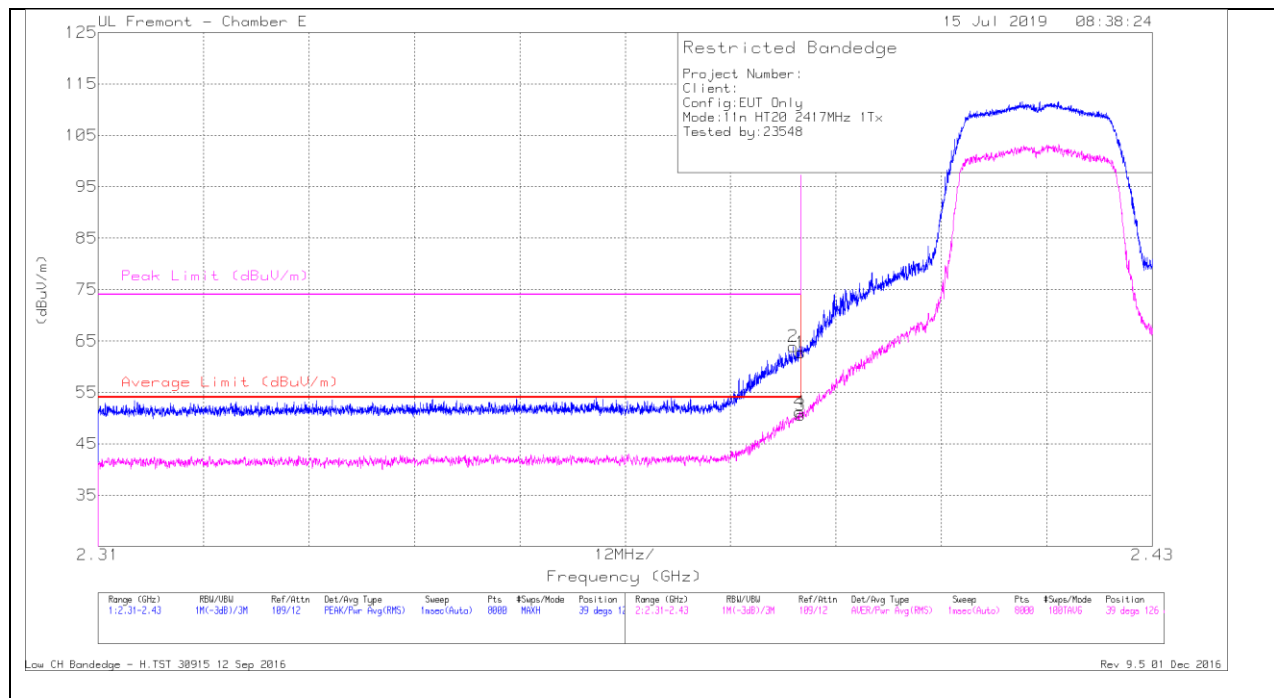


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Chl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.74	Pk	32.3	-18.3	62.74	-	-	74	-11.26	39	126	H
2	* 2.389	49.92	Pk	32.3	-18.3	63.92	-	-	74	-10.08	39	126	H
3	* 2.39	36.54	RMS	32.3	-18.3	50.54	54	-3.46	-	-	39	126	H
4	* 2.39	37.15	RMS	32.3	-18.3	51.15	54	-2.85	-	-	39	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

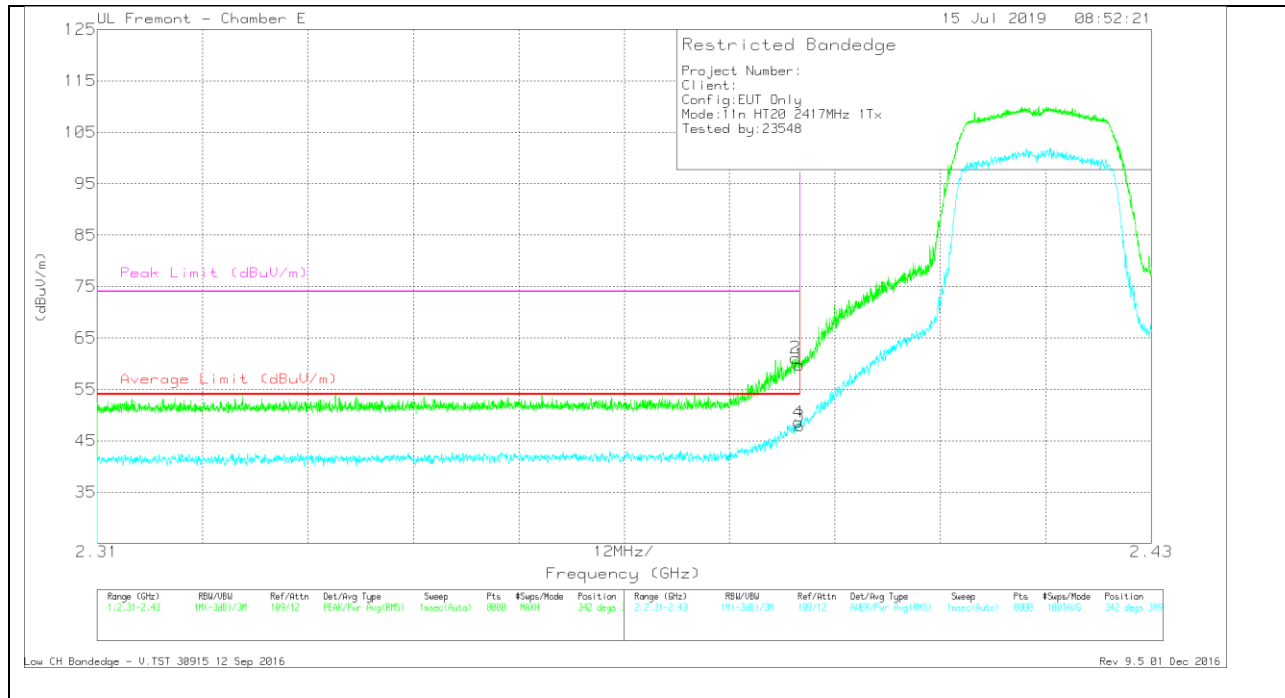

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.77	Pk	32.3	-18.3	59.77	-	-	74	-14.23	342	389	V
2	* 2.39	47.12	Pk	32.3	-18.3	61.12	-	-	74	-12.88	342	389	V
3	* 2.39	33.86	RMS	32.3	-18.3	47.86	54	-6.14	-	-	342	389	V
4	* 2.39	34.62	RMS	32.3	-18.3	48.62	54	-5.38	-	-	342	389	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

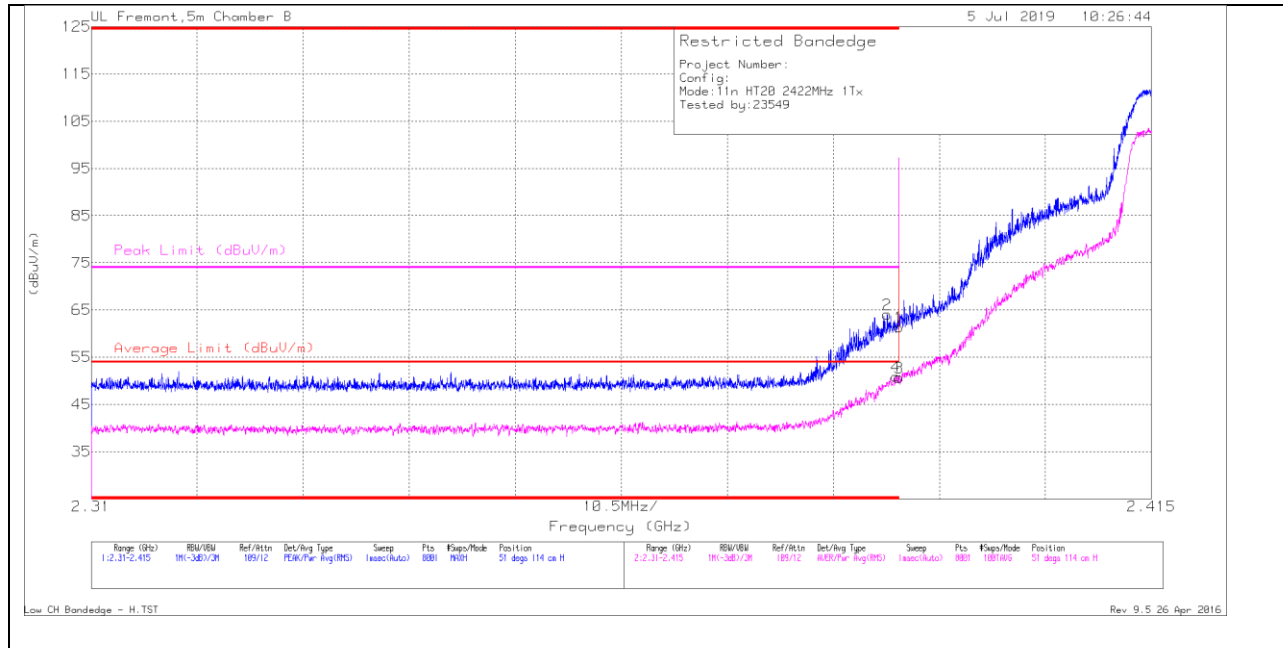


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtri/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.35	Pk	31.9	-18.9	61.35	-	-	74	-12.65	51	114	H
2	* 2.389	51.06	Pk	31.9	-18.9	64.06	-	-	74	-9.94	51	114	H
3	* 2.39	37.71	RMS	31.9	-18.9	50.71	54	-3.29	-	-	51	114	H
4	* 2.39	37.9	RMS	31.9	-18.9	50.9	54	-3.1	-	-	51	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

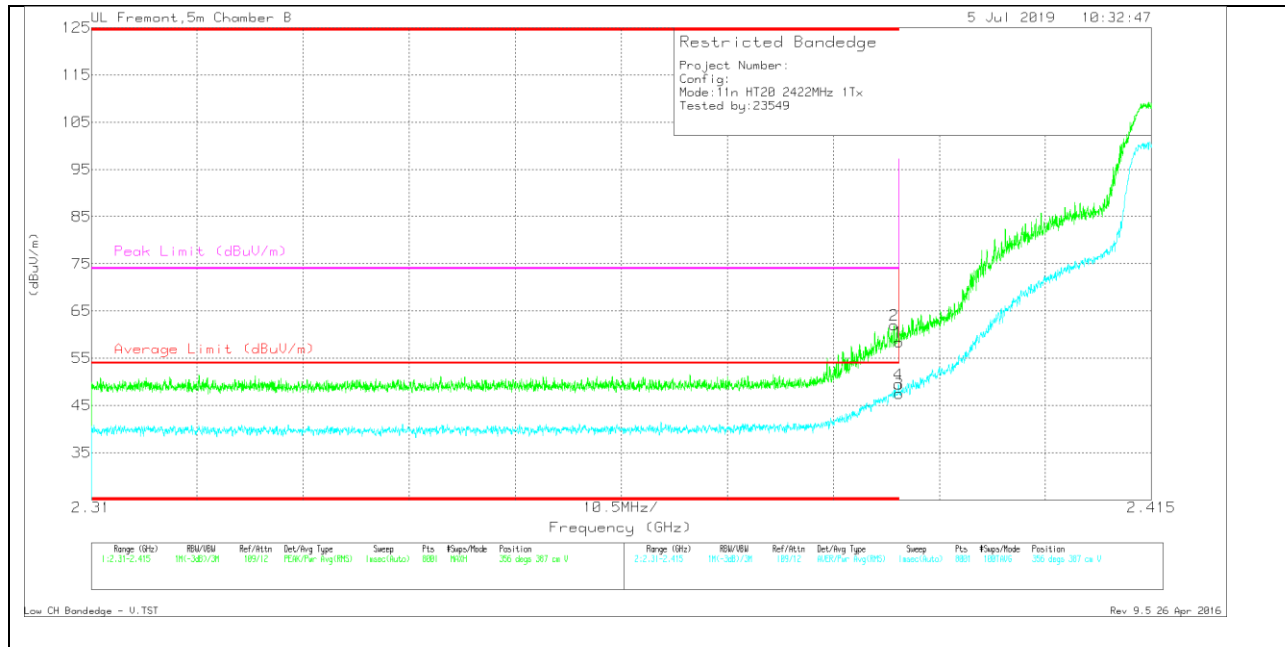

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.44	Pk	31.9	-18.9	58.44	-	-	74	-15.56	356	387	V
2	* 2.39	49	PK	31.9	-18.9	62	-	-	74	-12	356	387	V
3	* 2.39	34.53	RMS	31.9	-18.9	47.53	54	-6.47	-	-	356	387	V
4	* 2.39	36.51	RMS	31.9	-18.9	49.51	54	-4.49	-	-	356	387	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 9)

HORIZONTAL RESULT

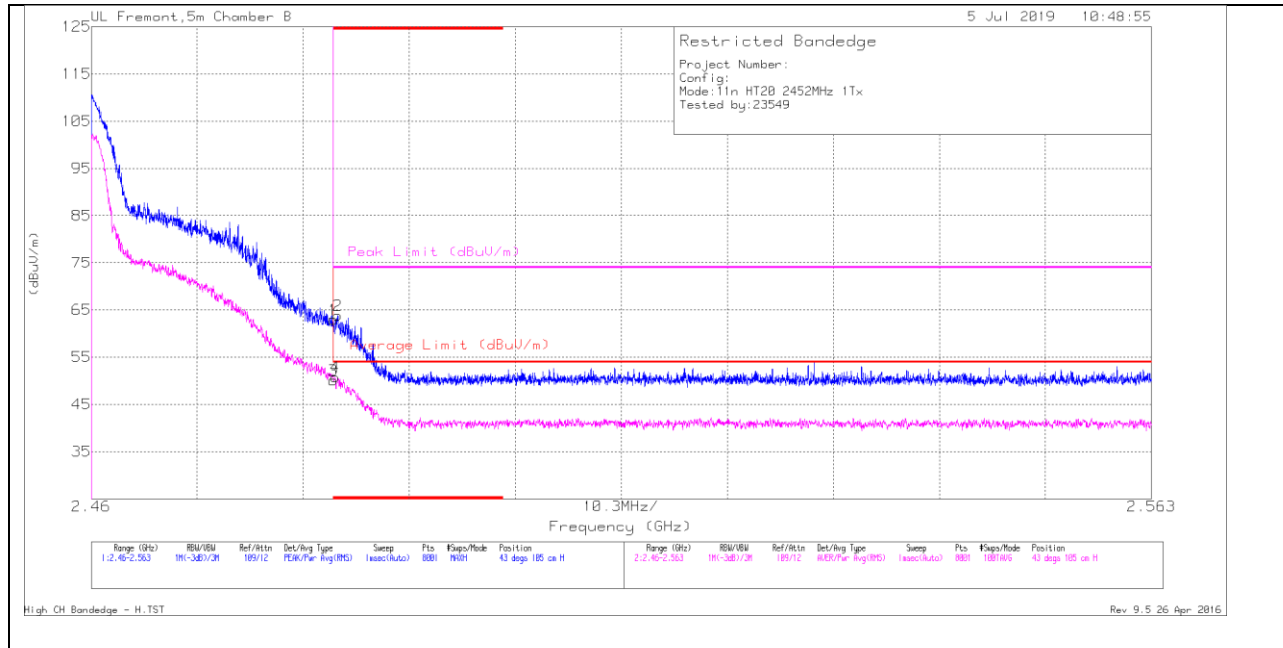

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.59	Pk	32.3	-18.9	62.99	-	-	74	-11.01	43	105	H
2	* 2.484	50.46	Pk	32.3	-18.9	63.86	-	-	74	-10.14	43	105	H
3	* 2.484	36.73	RMS	32.3	-18.9	50.13	54	-3.87	-	-	43	105	H
4	* 2.484	37.41	RMS	32.3	-18.9	50.81	54	-3.19	-	-	43	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UL Fremont, 5m Chamber B

5 Jul 2019 10:55:32

Restricted Bandedge

Project Number:
Config:
Mode: IIR HT20 2452MHz 1Tx
Tested by: 23549

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

dBuV/m

Frequency (GHz)

Range (GHz)	RBW/BBW	Ref/Att'n	Det/Avg Type	Sweep	Pls	Flags/Mode	Position
1.2, 40-2.563	10K(-3dB)/3M	100/12	PLW/Pwr Avg(RMS)	1 sweep(Auto)	800	PL01	18 steps, 302 on U
2.2, 40-2.563	10K(-3dB)/3M	100/12	PLW/Pwr Avg(RMS)	1 sweep(Auto)	800	PL01	18 steps, 302 on U

High CH Bandedge = U, TST


Rev 9.5 26 Apr 2016

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.61	Pk	32.3	-18.9	60.01	-	-	74	-13.99	10	362	V
2	* 2.484	48.79	Pk	32.3	-18.9	62.19	-	-	74	-11.81	10	362	V
3	* 2.484	35.17	RMS	32.3	-18.9	48.57	54	-5.43	-	-	10	362	V
4	* 2.484	35.84	RMS	32.3	-18.9	49.24	54	-4.76	-	-	10	362	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

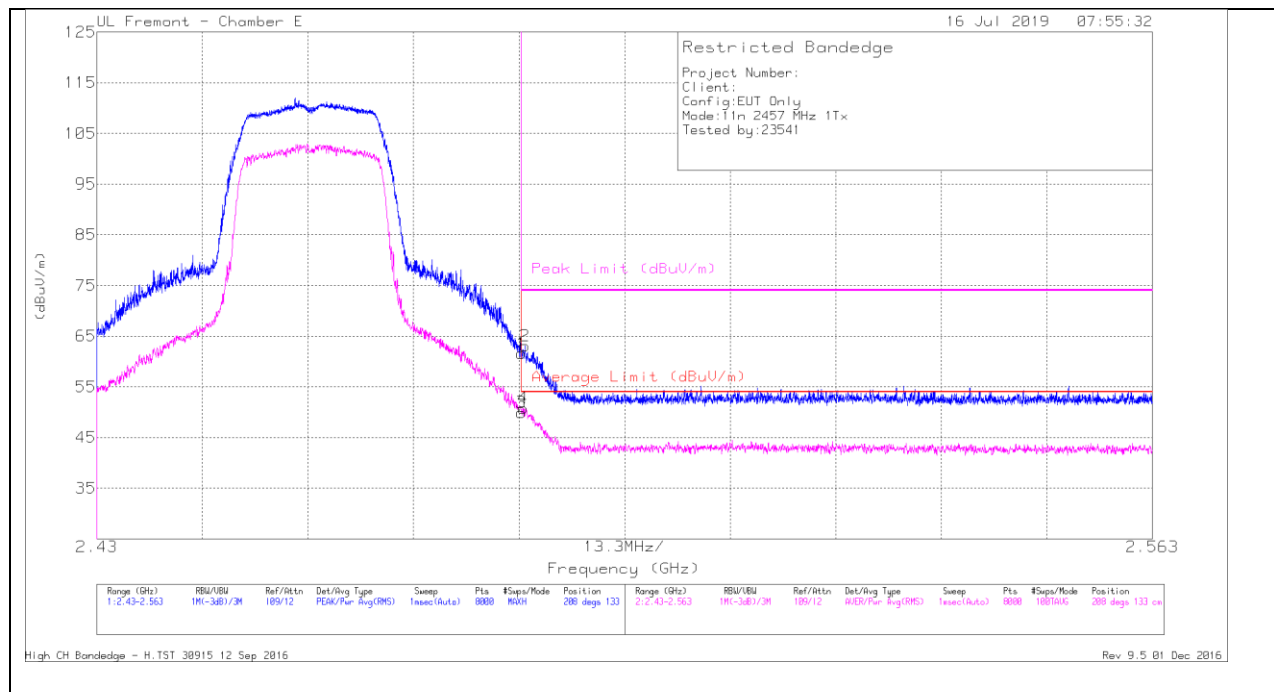


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.88	Pk	32.8	-18.1	61.58	-	-	74	-12.42	208	133	H
2	* 2.484	48.35	Pk	32.8	-18.1	63.05	-	-	74	-10.95	208	133	H
3	* 2.484	35.24	RMS	32.8	-18.1	49.94	54	-4.06	-	-	208	133	H
4	* 2.484	36.14	RMS	32.8	-18.1	50.84	54	-3.16	-	-	208	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

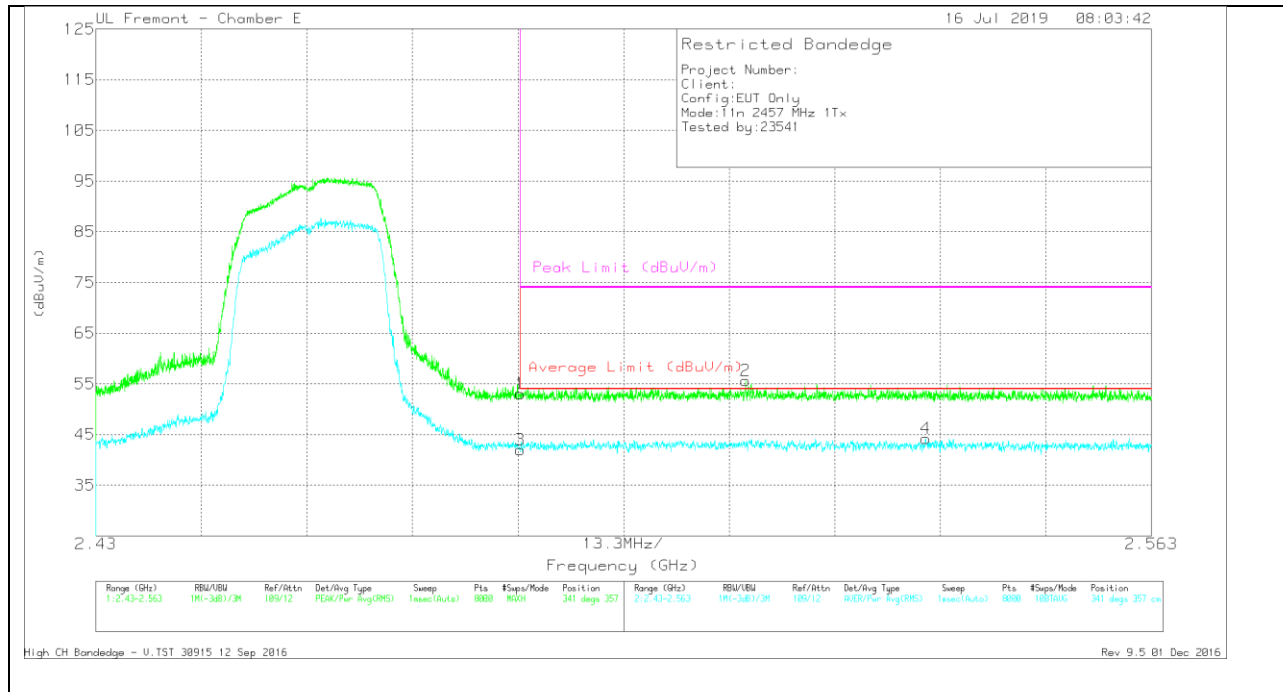

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Chl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.29	Pk	32.8	-18.1	52.99	-	-	74	-21.01	341	357	V
3	* 2.484	27.26	RMS	32.8	-18.1	41.96	54	-12.04	-	-	341	357	V
2	2.512	40.86	Pk	32.9	-18.1	55.66	-	-	74	-18.34	341	357	V
4	2.535	29.57	RMS	32.9	-18.3	44.17	54	-9.83	-	-	341	357	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

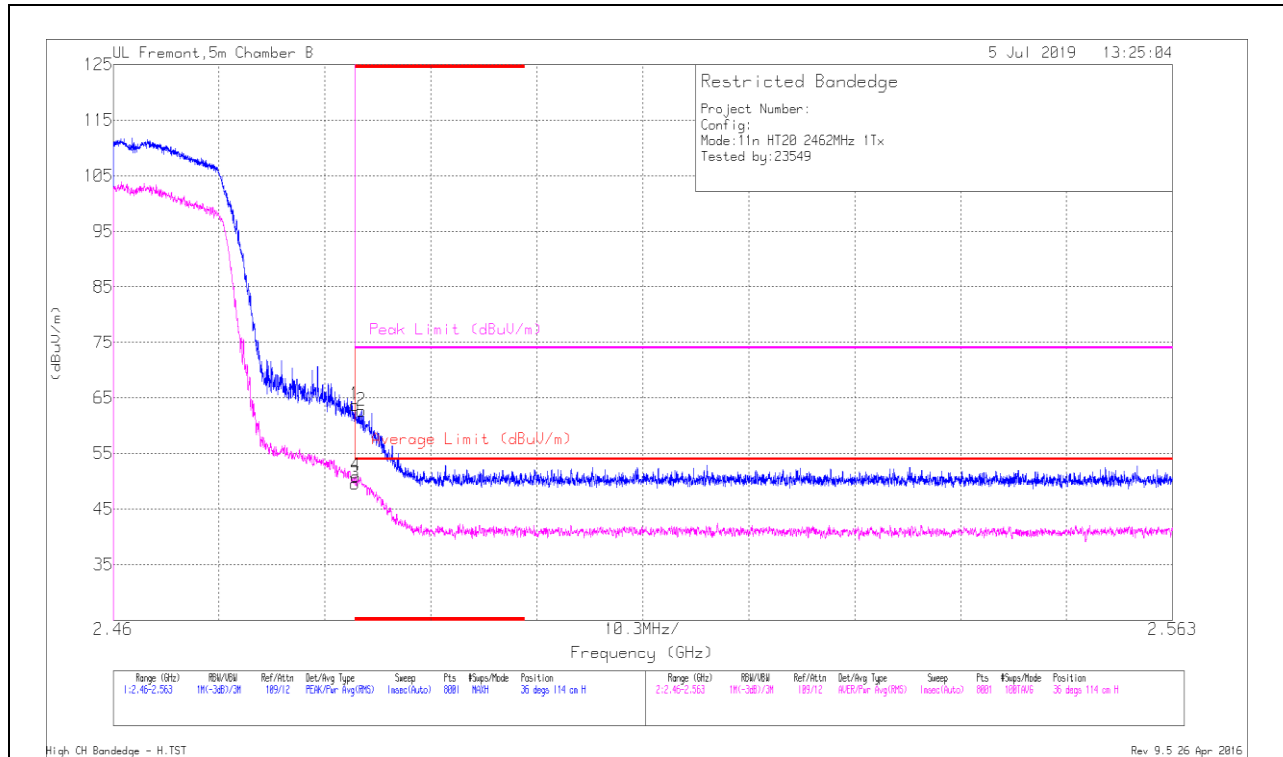


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.34	Pk	32.3	-18.9	63.74	-	-	74	-10.26	36	114	H
2	* 2.484	49.31	Pk	32.3	-18.9	62.71	-	-	74	-11.29	36	114	H
3	* 2.484	36.21	RMS	32.3	-18.9	49.61	54	-4.39	-	-	36	114	H
4	* 2.484	37.51	RMS	32.3	-18.9	50.91	54	-3.09	-	-	36	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

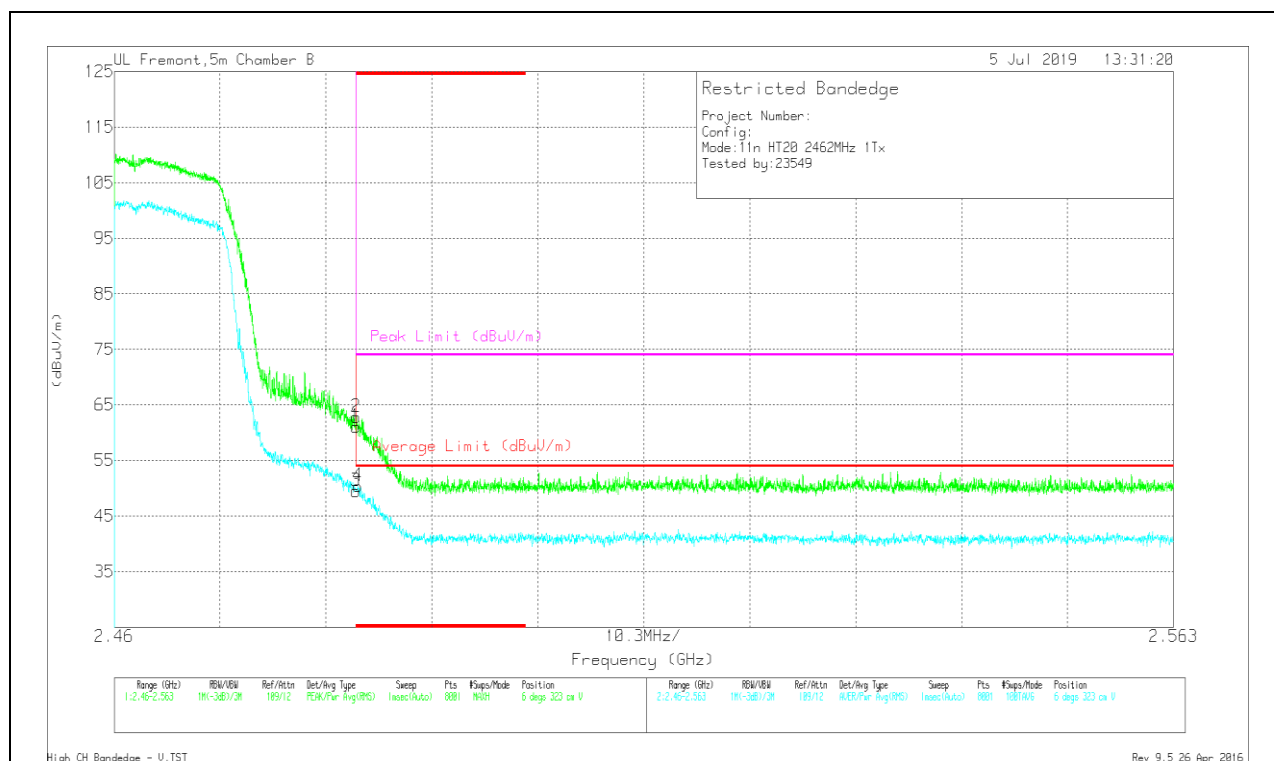

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.7	Pk	32.3	-18.9	61.1	-	-	74	-12.9	6	323	V
2	* 2.484	49.45	Pk	32.3	-18.9	62.85	-	-	74	-11.15	6	323	V
3	* 2.484	36.14	RMS	32.3	-18.9	49.54	54	-4.46	-	-	6	323	V
4	* 2.484	37	RMS	32.3	-18.9	50.4	54	-3.6	-	-	6	323	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

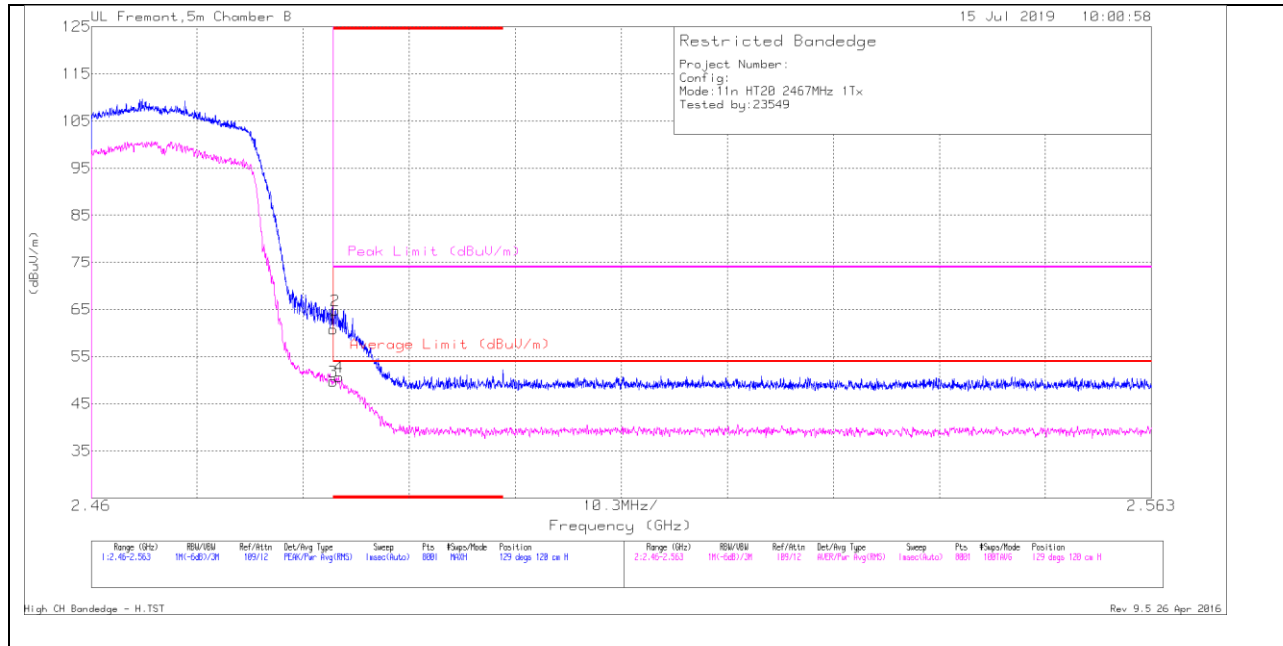


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FiltriP ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.39	Pk	32.3	-18.9	60.79	-	-	74	-13.21	129	120	H
2	* 2.484	51.44	Pk	32.3	-18.9	64.84	-	-	74	-9.16	129	120	H
3	* 2.484	36.4	RMS	32.3	-18.9	49.8	54	-4.2	-	-	129	120	H
4	* 2.484	37.29	RMS	32.3	-18.9	50.69	54	-3.31	-	-	129	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

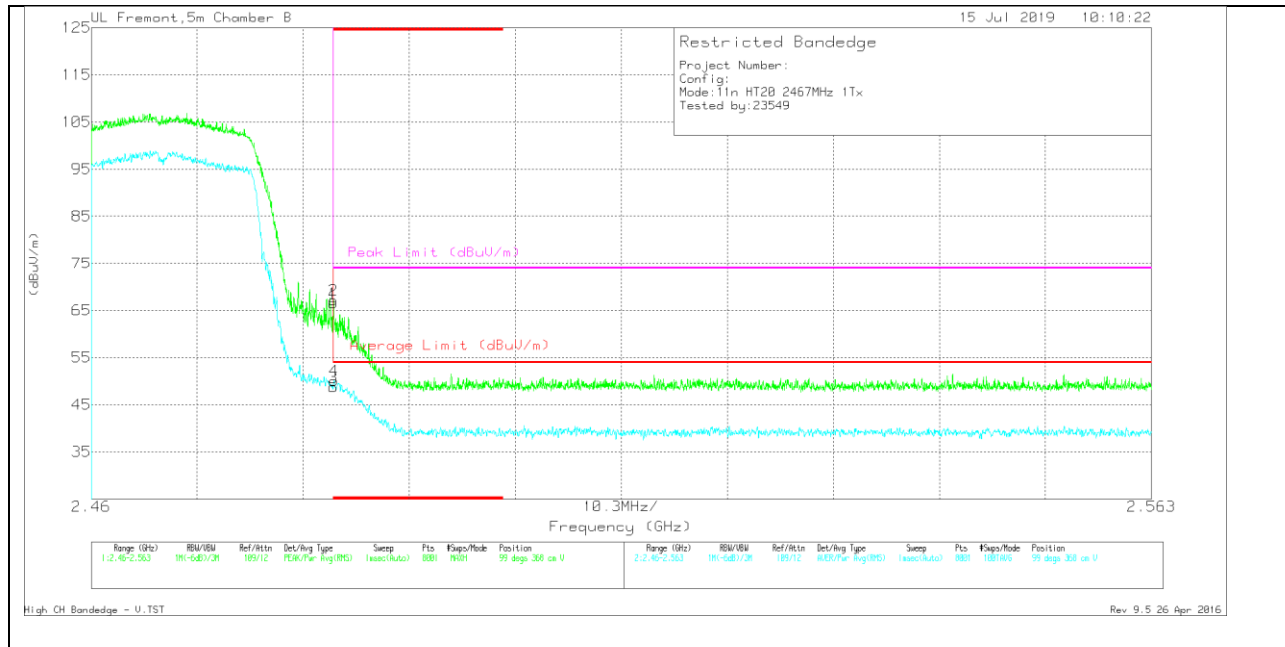

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.21	Pk	32.3	-18.9	66.61	-	-	74	-7.39	99	368	V
2	* 2.484	53.82	PK	32.3	-18.9	67.22	-	-	74	-6.78	99	368	V
3	* 2.484	35.35	RMS	32.3	-18.9	48.75	54	-5.25	-	-	99	368	V
4	* 2.484	36.75	RMS	32.3	-18.9	50.15	54	-3.85	-	-	99	368	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

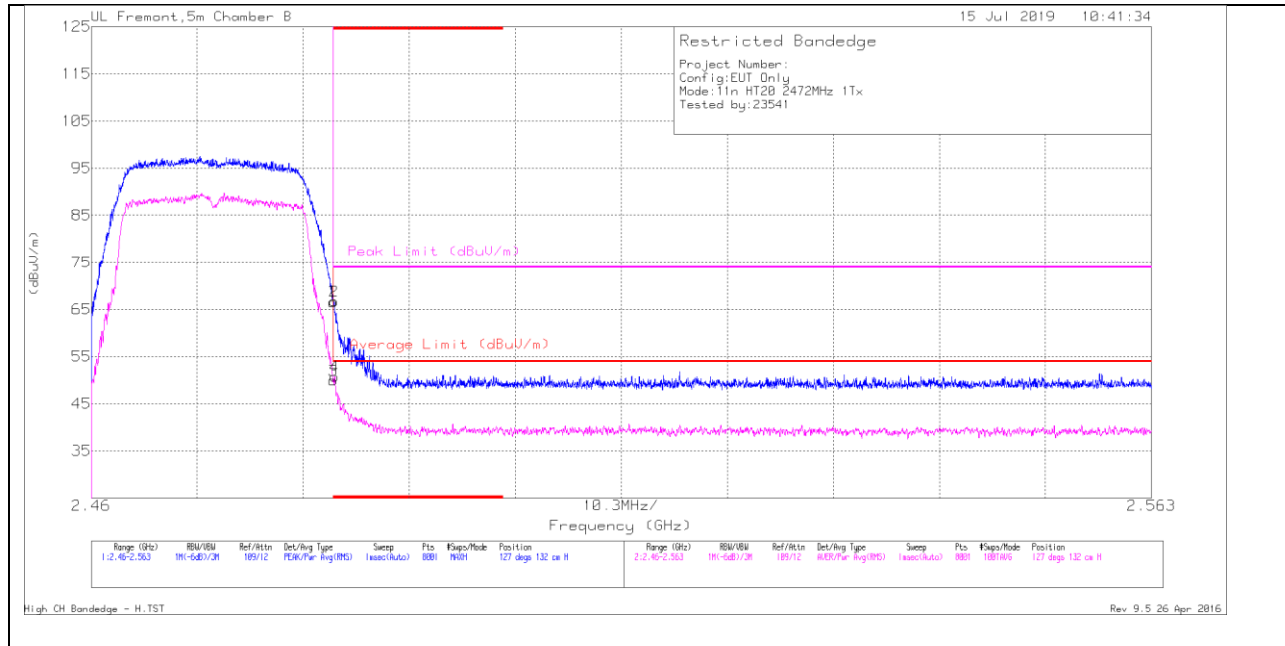


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.18	Pk	32.3	-18.9	66.58	-	-	74	-7.42	127	132	H
2	* 2.484	53.38	Pk	32.3	-18.9	66.78	-	-	74	-7.22	127	132	H
3	* 2.484	36.57	RMS	32.3	-18.9	49.97	54	-4.03	-	-	127	132	H
4	* 2.484	37.38	RMS	32.3	-18.9	50.78	54	-3.22	-	-	127	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

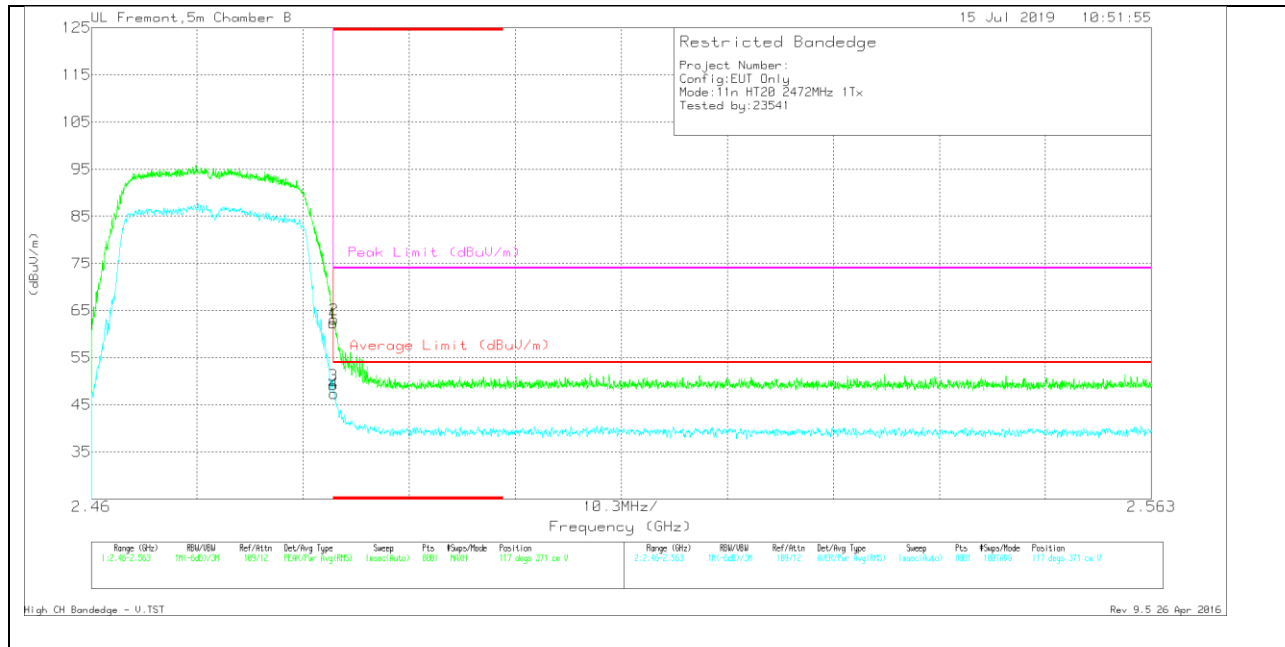

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.92	Pk	32.3	-18.9	62.32	-	-	74	-11.68	117	371	V
2	* 2.484	49.73	PK	32.3	-18.9	63.13	-	-	74	-10.87	117	371	V
3	* 2.484	35.82	RMS	32.3	-18.9	49.22	54	-4.78	-	-	117	371	V
4	* 2.484	34.01	RMS	32.3	-18.9	47.41	54	-6.59	-	-	117	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 4 + Antenna 3 CDD MODE

BANDEGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

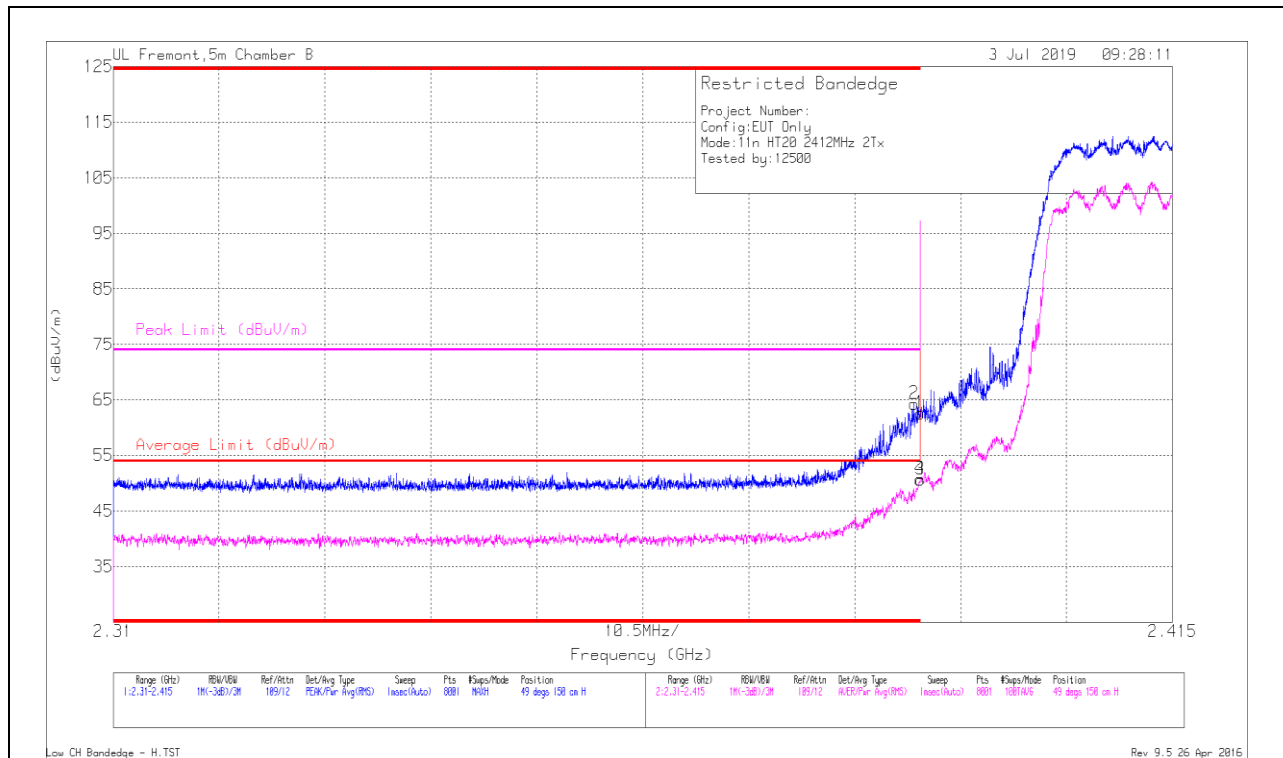


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.6	Pk	31.9	-18.9	62.6	-	-	74	-11.4	49	150	H
2	* 2.389	51.31	Pk	31.9	-18.9	64.31	-	-	74	-9.69	49	150	H
3	* 2.39	37.67	RMS	31.9	-18.9	50.67	54	-3.33	-	-	49	150	H
4	* 2.39	37.73	RMS	31.9	-18.9	50.73	54	-3.27	-	-	49	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

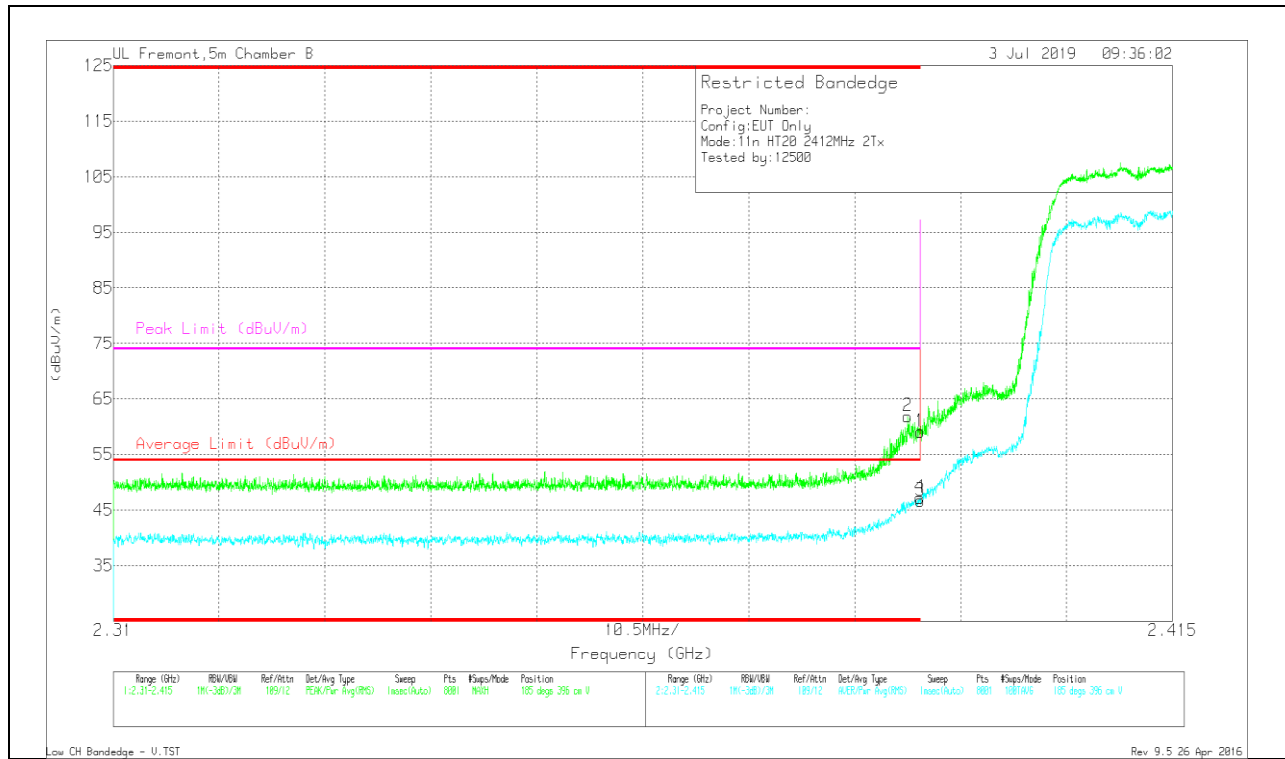

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	48.86	Pk	31.9	-18.9	61.86	-	-	74	-12.14	185	396	V
1	* 2.39	46.14	Pk	31.9	-18.9	59.14	-	-	74	-14.86	185	396	V
3	* 2.39	33.73	RMS	31.9	-18.9	46.73	54	-7.27	-	-	185	396	V
4	* 2.39	34.22	RMS	31.9	-18.9	47.22	54	-6.78	-	-	185	396	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

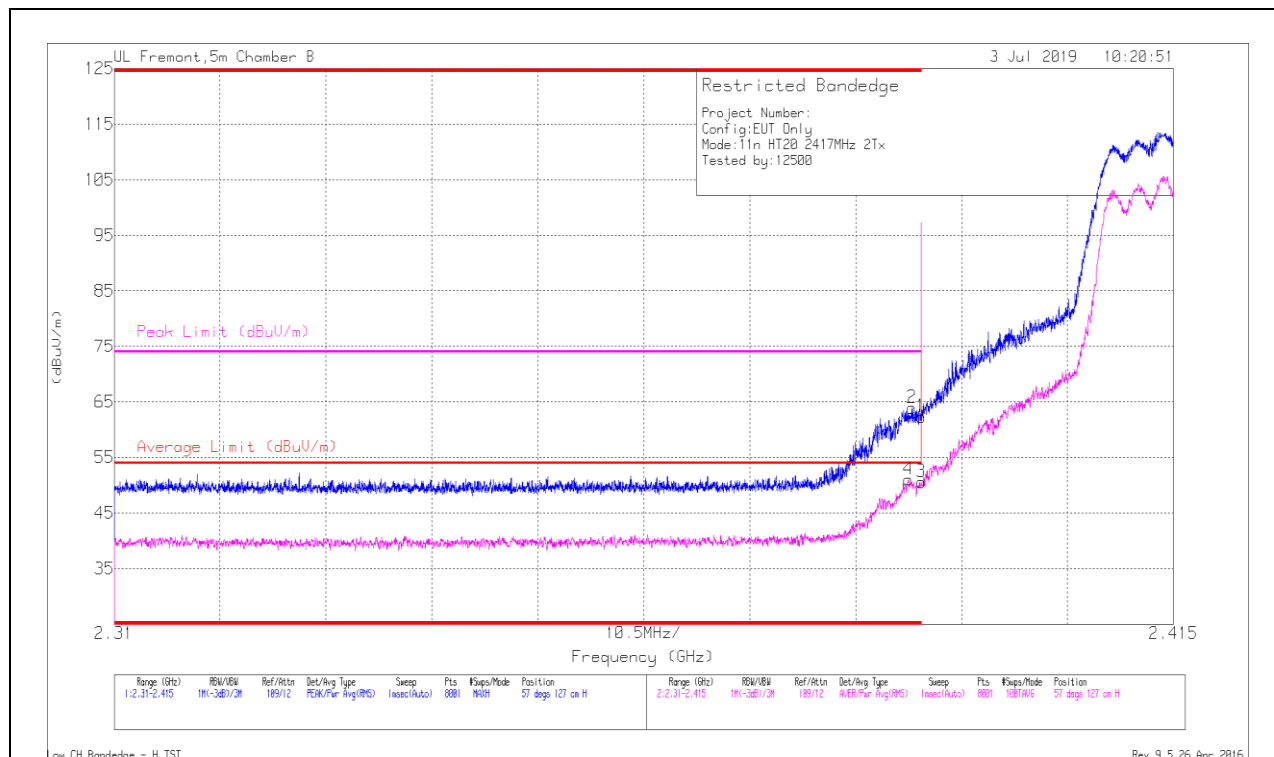


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.35	Pk	31.9	-18.9	62.35	-	-	74	-11.65	57	127	H
2	* 2.389	50.94	Pk	31.9	-18.9	63.94	-	-	74	-10.06	57	127	H
3	* 2.39	37.6	RMS	31.9	-18.9	50.6	54	-3.4	-	-	57	127	H
4	* 2.389	38.02	RMS	31.9	-18.9	51.02	54	-2.98	-	-	57	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

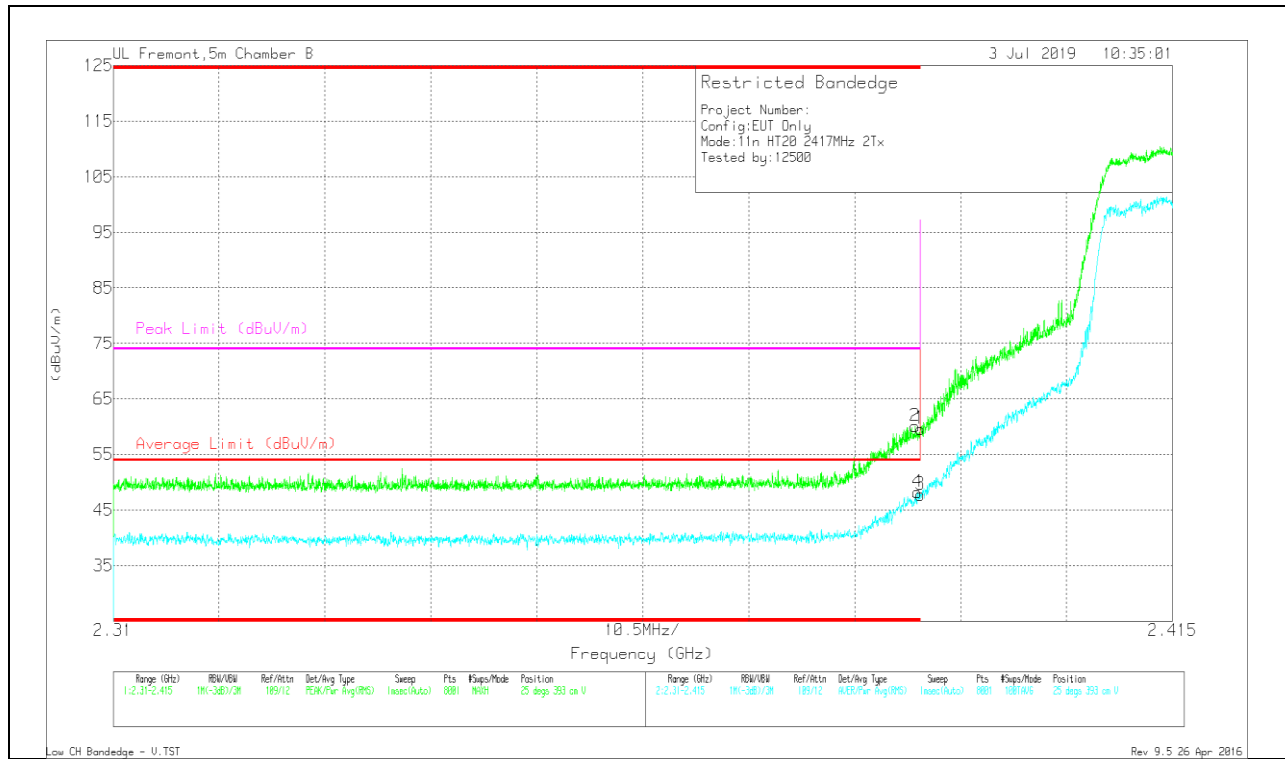

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.61	Pk	31.9	-18.9	59.61	-	-	74	-14.39	25	393	V
2	* 2.389	47.1	Pk	31.9	-18.9	60.1	-	-	74	-13.9	25	393	V
3	* 2.39	34.81	RMS	31.9	-18.9	47.81	54	-6.19	-	-	25	393	V
4	* 2.39	35.22	RMS	31.9	-18.9	48.22	54	-5.78	-	-	25	393	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

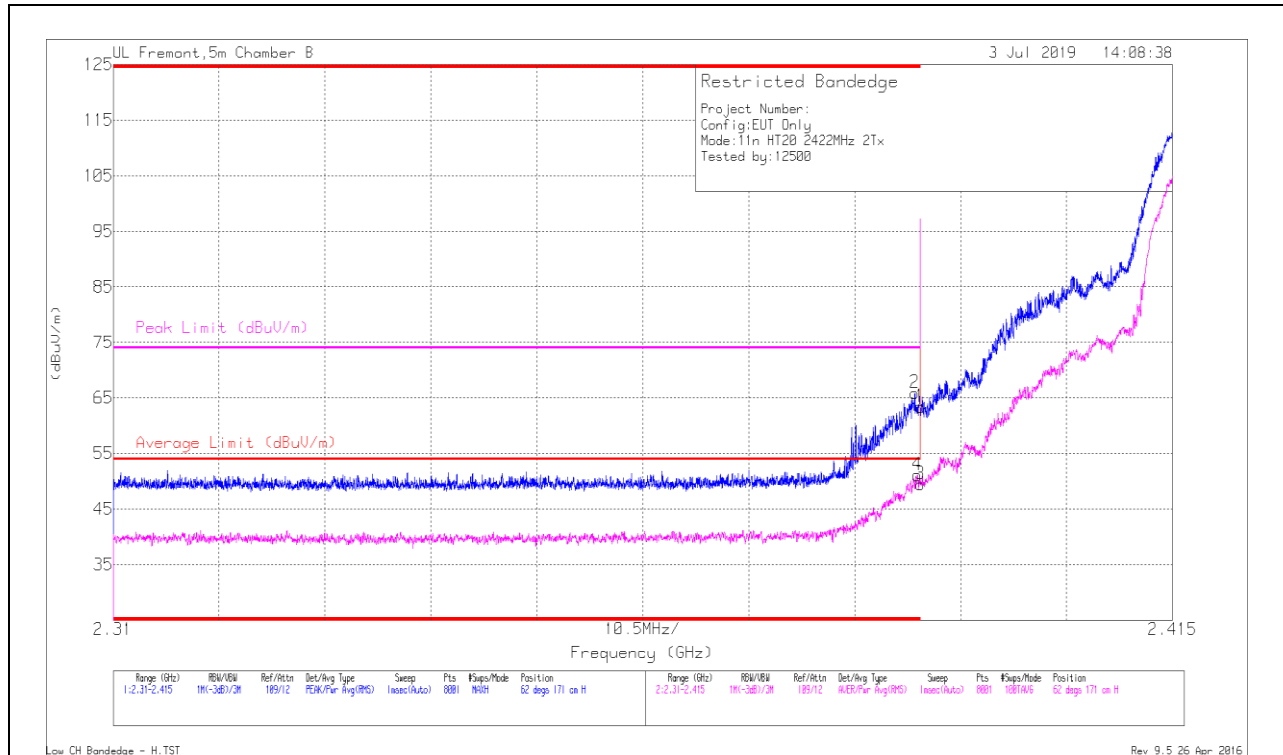


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.43	Pk	31.9	-18.9	63.43	-	-	74	-10.57	62	171	H
2	* 2.389	52.89	Pk	31.9	-18.9	65.89	-	-	74	-8.11	62	171	H
3	* 2.39	36.45	RMS	31.9	-18.9	49.45	54	-4.55	-	-	62	171	H
4	* 2.39	38.11	RMS	31.9	-18.9	51.11	54	-2.89	-	-	62	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

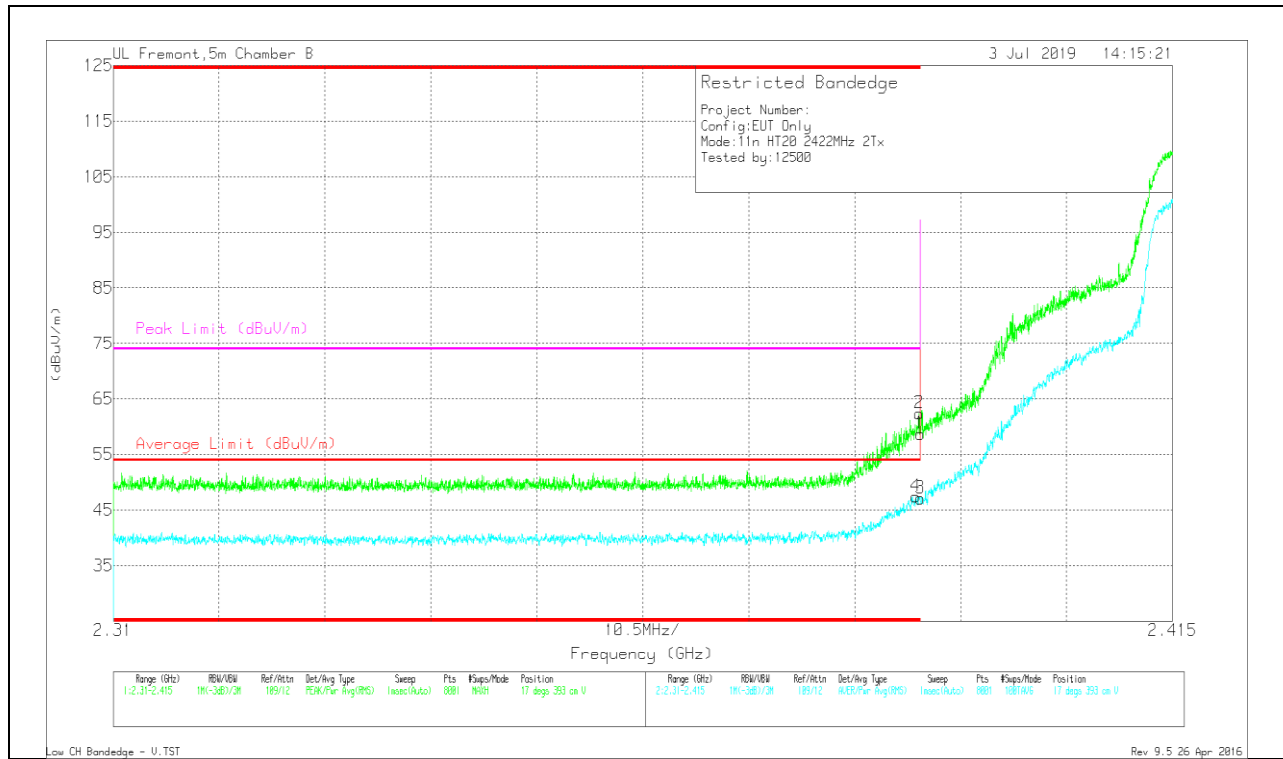

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.7	Pk	31.9	-18.9	58.7	-	-	74	-15.3	17	393	V
2	* 2.39	49.38	Pk	31.9	-18.9	62.38	-	-	74	-11.62	17	393	V
3	* 2.39	34.14	RMS	31.9	-18.9	47.14	54	-6.86	-	-	17	393	V
4	* 2.39	34.43	RMS	31.9	-18.9	47.43	54	-6.57	-	-	17	393	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

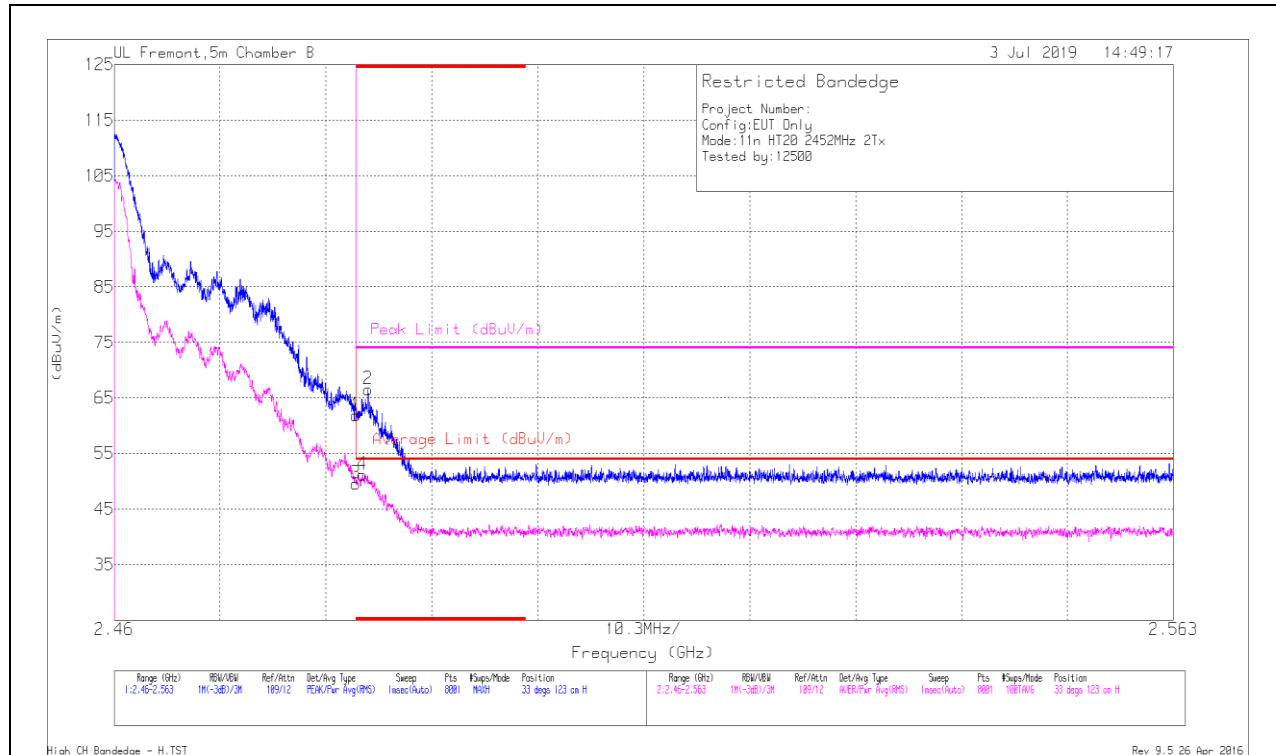


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.49	Pk	32.3	-18.9	61.89	-	-	74	-12.11	33	123	H
2	* 2.485	53.15	Pk	32.3	-18.9	66.55	-	-	74	-7.45	33	123	H
3	* 2.484	36.19	RMS	32.3	-18.9	49.59	54	-4.41	-	-	33	123	H
4	* 2.484	37.78	RMS	32.3	-18.9	51.18	54	-2.82	-	-	33	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

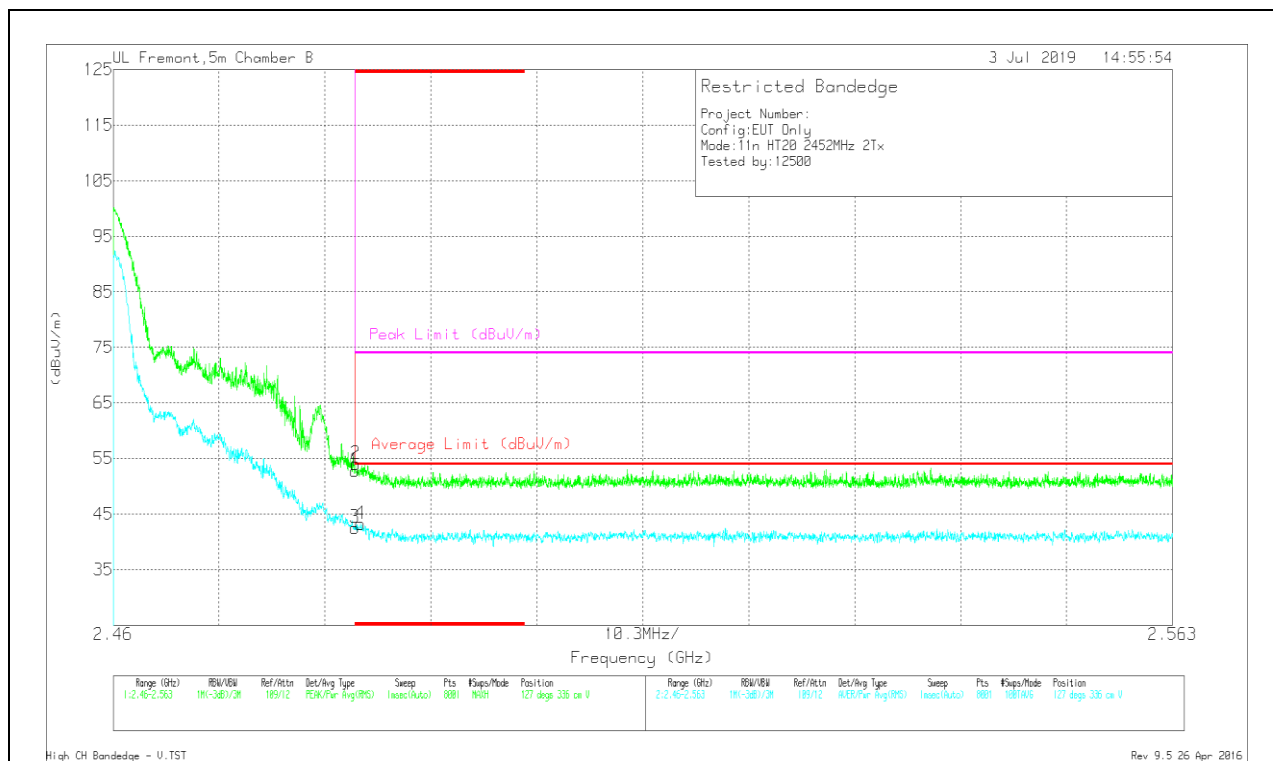

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/FiltrIP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.43	Pk	32.3	-18.9	52.83	-	-	74	-21.17	127	336	V
2	* 2.484	40.66	Pk	32.3	-18.9	54.06	-	-	74	-19.94	127	336	V
3	* 2.484	29.12	RMS	32.3	-18.9	42.52	54	-11.48	-	-	127	336	V
4	* 2.484	29.85	RMS	32.3	-18.9	43.25	54	-10.75	-	-	127	336	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

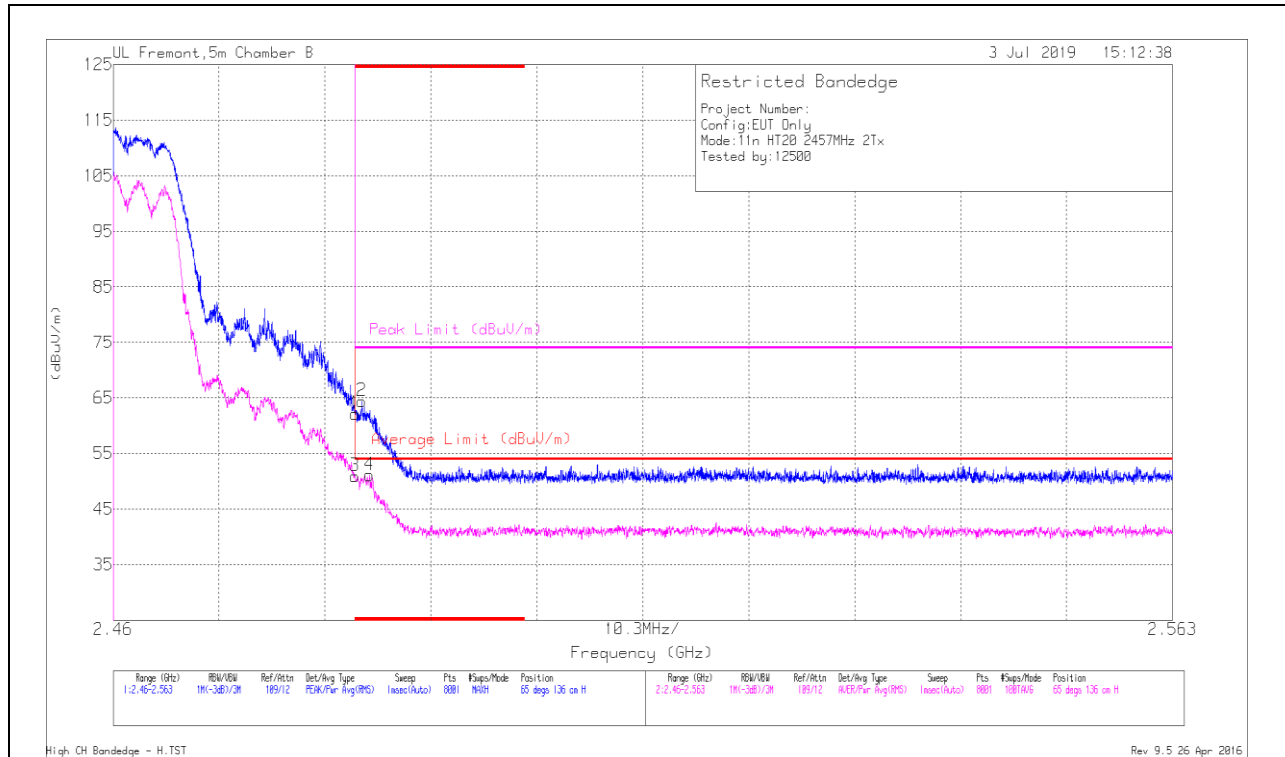


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.78	Pk	32.3	-18.9	62.18	-	-	74	-11.82	65	136	H
2	* 2.484	51.03	Pk	32.3	-18.9	64.43	-	-	74	-9.57	65	136	H
3	* 2.484	37.53	RMS	32.3	-18.9	50.93	54	-3.07	-	-	65	136	H
4	* 2.485	37.71	RMS	32.3	-18.9	51.11	54	-2.89	-	-	65	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

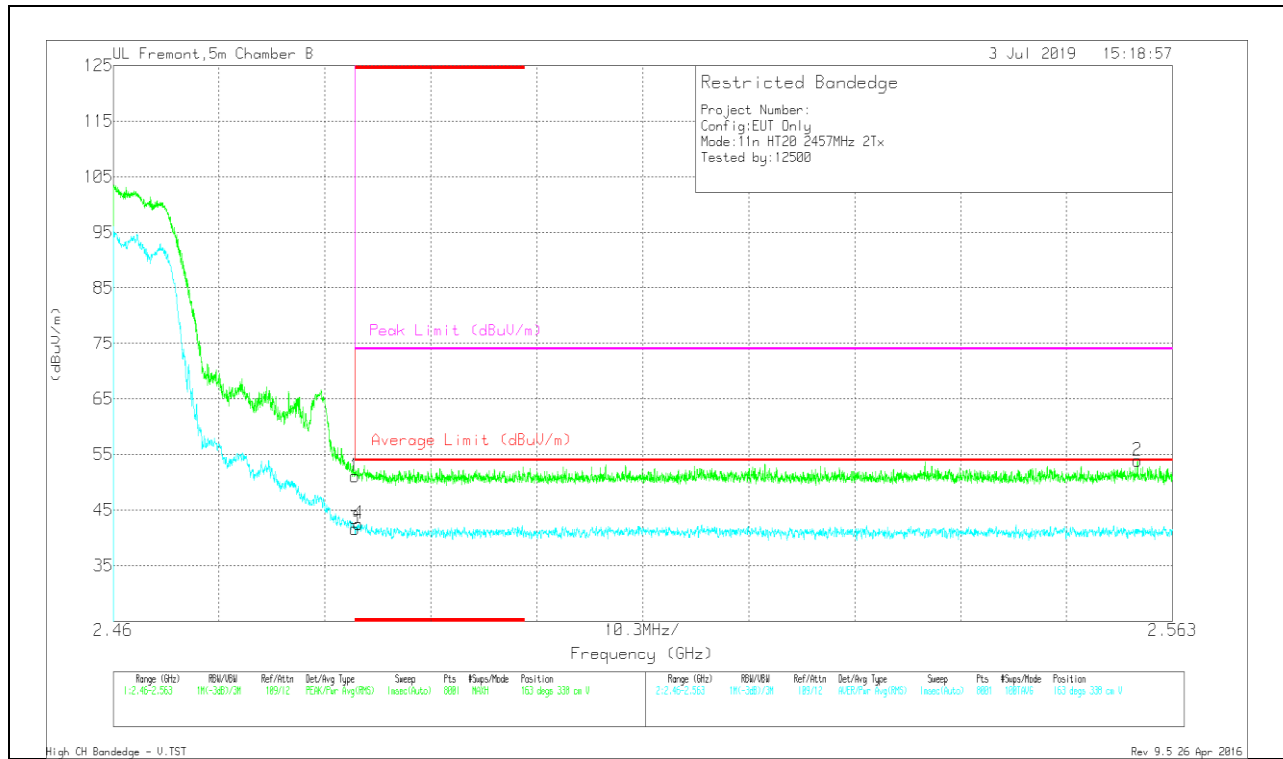

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/FiltrIP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.74	Pk	32.3	-18.9	51.14	-	-	74	-22.86	163	338	V
3	* 2.484	28.24	RMS	32.3	-18.9	41.64	54	-12.36	-	-	163	338	V
4	* 2.484	29.1	RMS	32.3	-18.9	42.5	54	-11.5	-	-	163	338	V
2	2.56	40.42	Pk	32.4	-18.9	53.92	-	-	74	-20.08	163	338	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

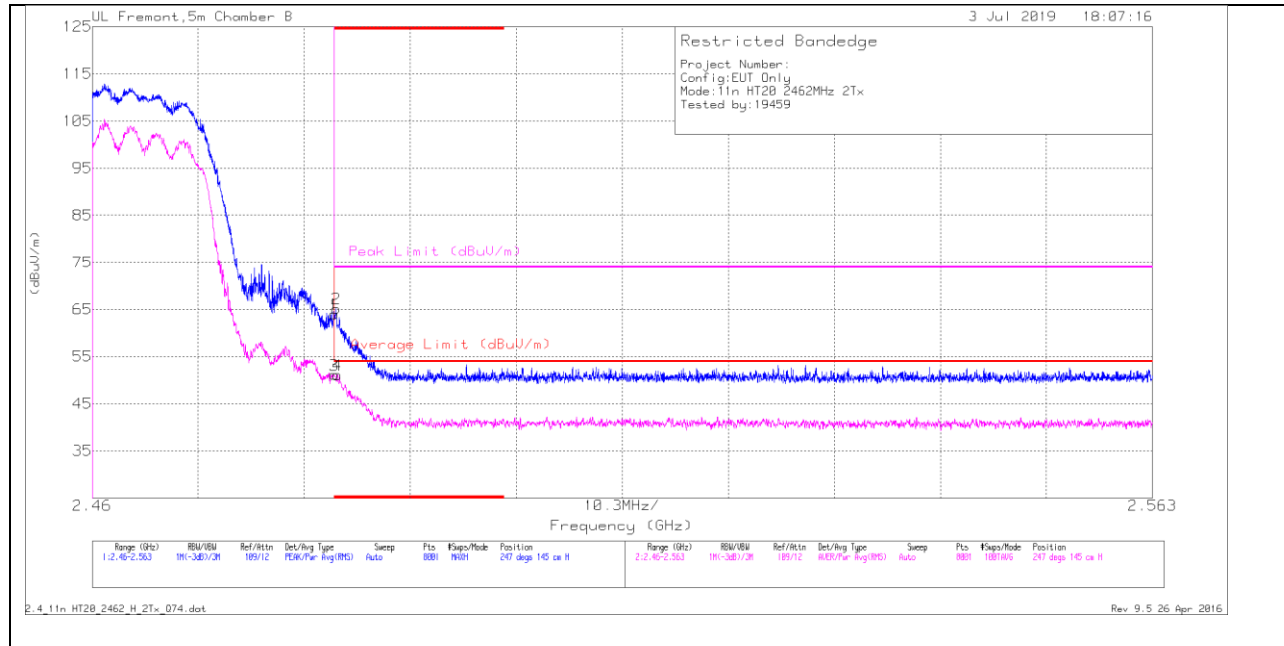


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.64	Pk	32.3	-18.9	64.04	-	-	74	-9.96	247	145	H
2	* 2.484	51.81	Pk	32.3	-18.9	65.21	-	-	74	-8.79	247	145	H
3	* 2.484	37.75	RMS	32.3	-18.9	51.15	54	-2.85	-	-	247	145	H
4	* 2.484	37.74	RMS	32.3	-18.9	51.14	54	-2.86	-	-	247	145	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

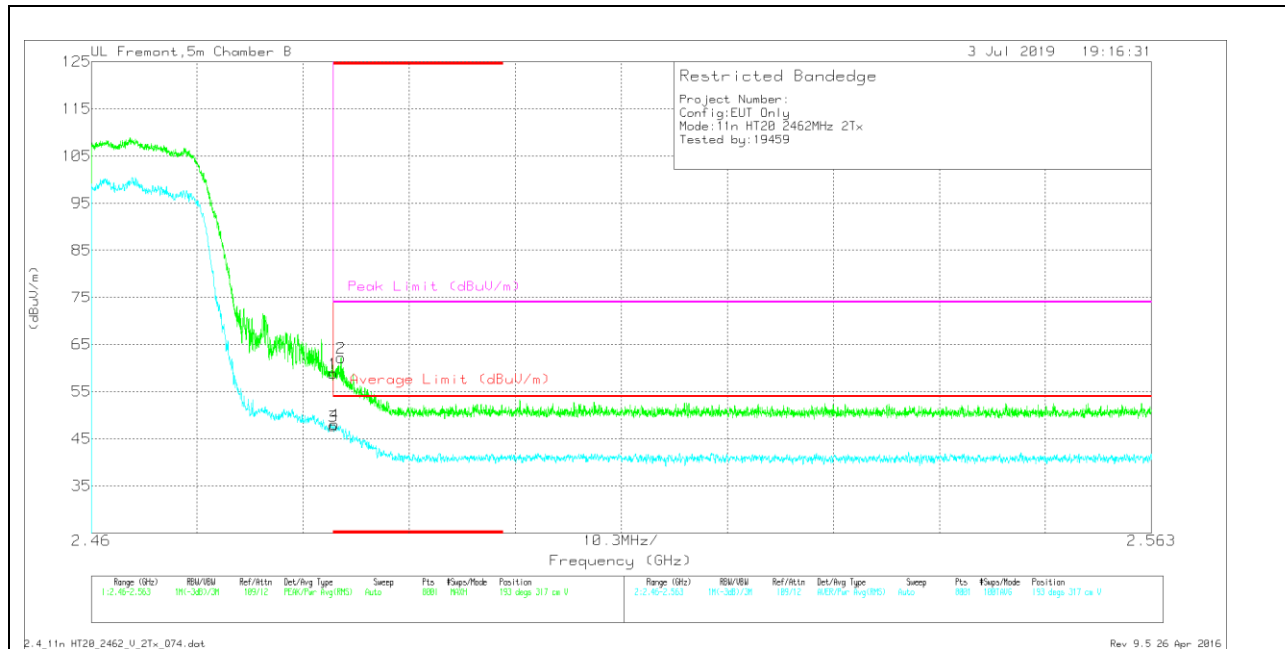

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.48	Pk	32.3	-18.9	58.88	-	-	74	-15.12	193	317	V
2	* 2.484	48.83	Pk	32.3	-18.9	62.23	-	-	74	-11.77	193	317	V
3	* 2.484	34.29	RMS	32.3	-18.9	47.69	54	-6.31	-	-	193	317	V
4	* 2.484	34.64	RMS	32.3	-18.9	48.04	54	-5.96	-	-	193	317	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

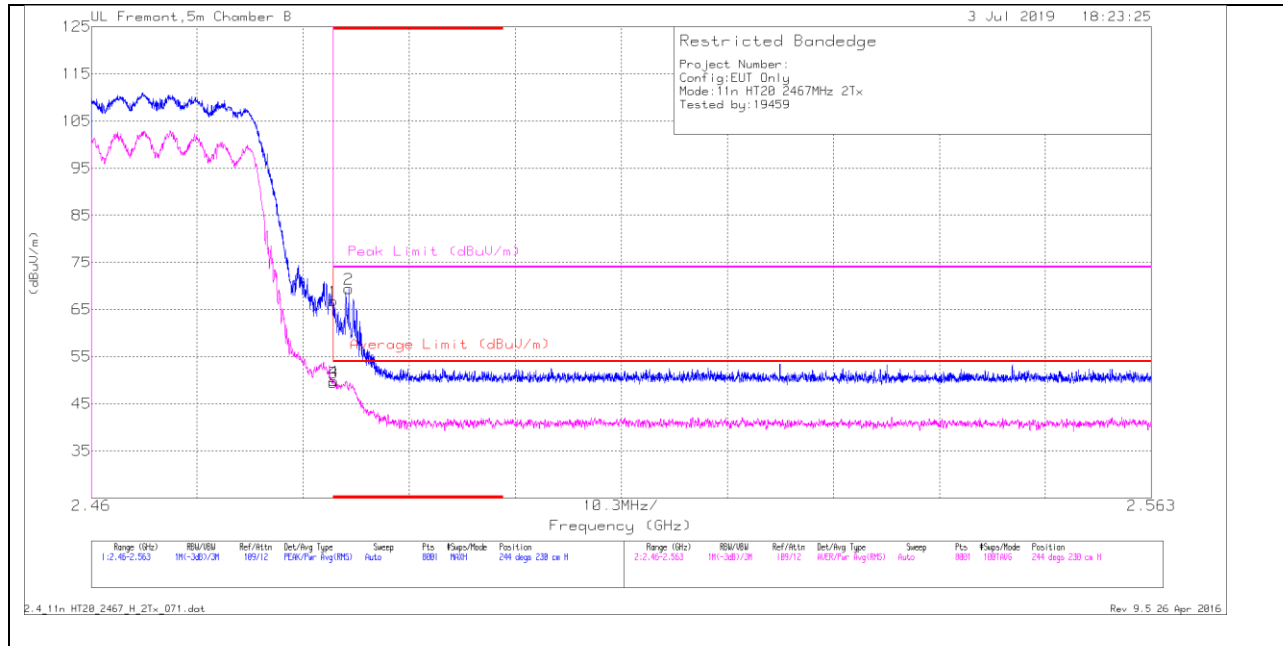


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FiltriP ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.39	Pk	32.3	-18.9	66.79	-	-	74	-7.21	244	230	H
2	* 2.485	56.01	Pk	32.3	-18.9	69.41	-	-	74	-4.59	244	230	H
3	* 2.484	36.06	RMS	32.3	-18.9	49.46	54	-4.54	-	-	244	230	H
4	* 2.484	36.43	RMS	32.3	-18.9	49.83	54	-4.17	-	-	244	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

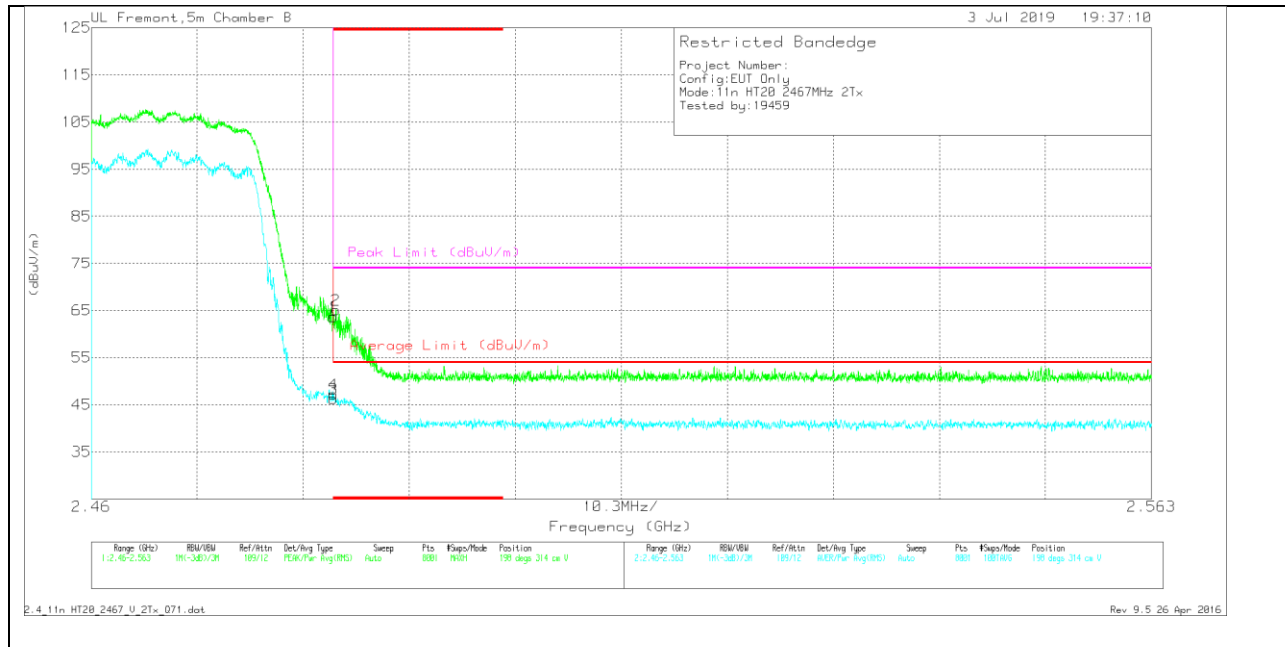


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.28	Pk	32.3	-18.9	63.68	-	-	74	-10.32	198	314	V
2	* 2.484	51.76	Pk	32.3	-18.9	65.16	-	-	74	-8.84	198	314	V
3	* 2.484	32.9	RMS	32.3	-18.9	46.3	54	-7.7	-	-	198	314	V
4	* 2.484	33.85	RMS	32.3	-18.9	47.25	54	-6.75	-	-	198	314	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

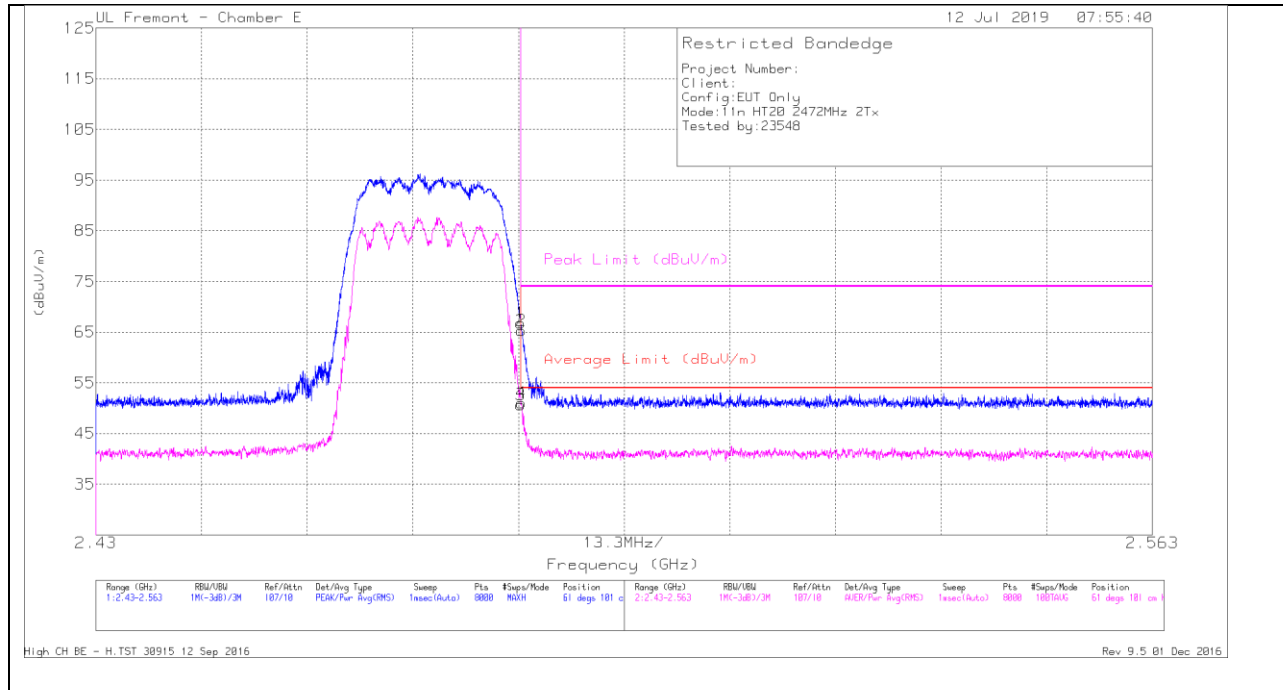


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	60.27	Pk	32.8	-26.3	66.77	-	-	74	-7.23	61	101	H
2	* 2.484	58.86	Pk	32.8	-26.3	65.36	-	-	74	-8.64	61	101	H
3	* 2.484	44.19	RMS	32.8	-26.3	50.69	54	-3.31	-	-	61	101	H
4	* 2.484	44.49	RMS	32.8	-26.3	50.99	54	-3.01	-	-	61	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

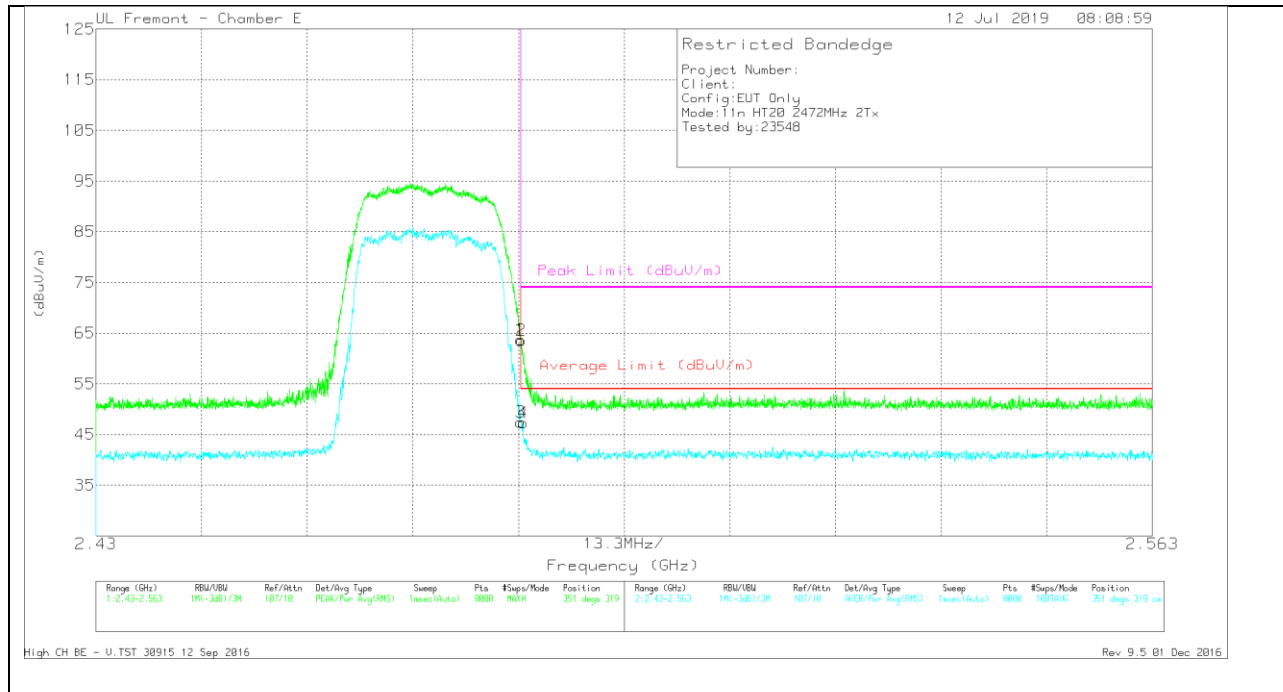

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.2	Pk	32.8	-26.3	63.7	-	-	74	-10.3	351	319	V
2	* 2.484	57.02	Pk	32.8	-26.3	63.52	-	-	74	-10.48	351	319	V
3	* 2.484	40.98	RMS	32.8	-26.3	47.48	54	-6.52	-	-	351	319	V
4	* 2.484	40.85	RMS	32.8	-26.3	47.35	54	-6.65	-	-	351	319	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

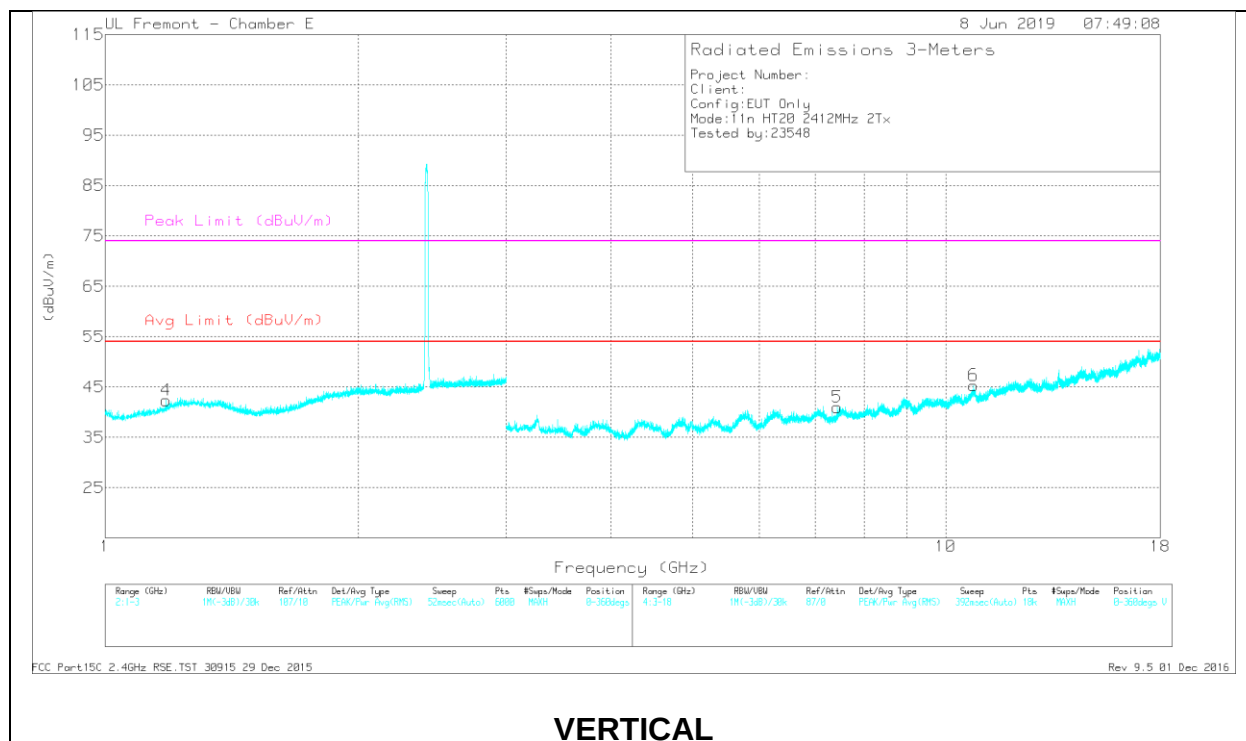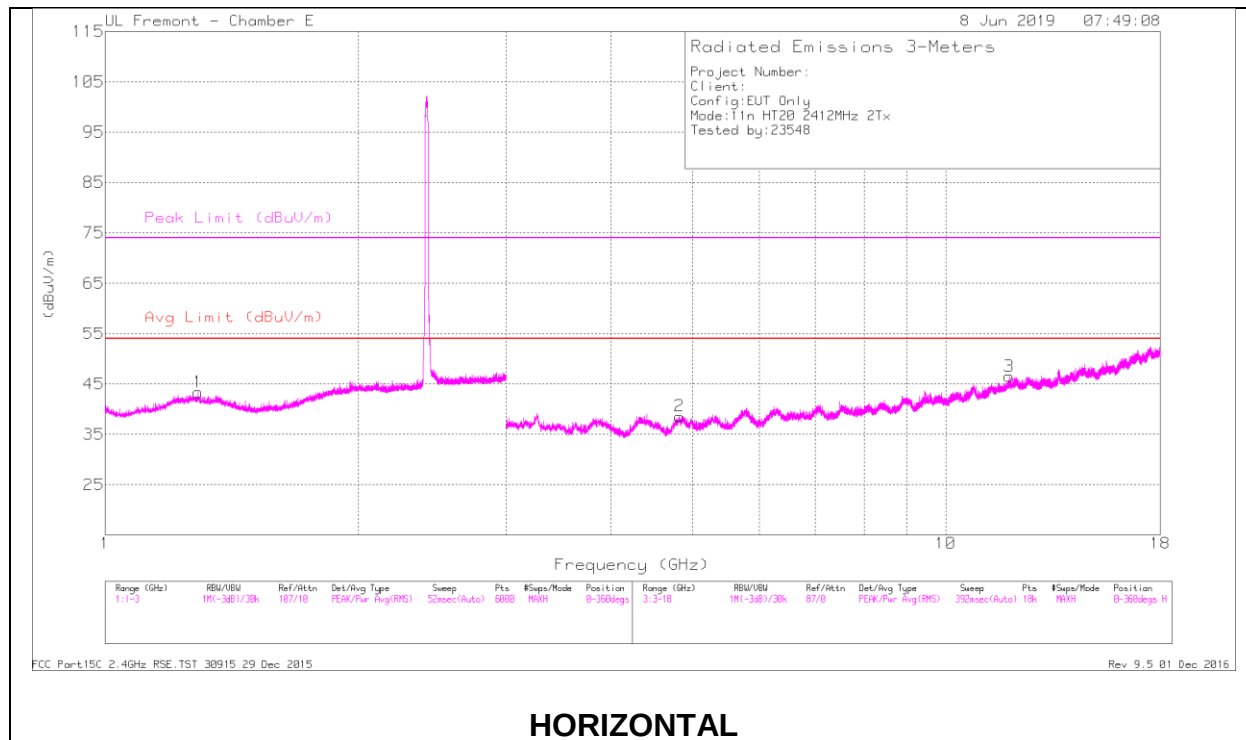

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.289	46.49	PK2	30	-26.2	50.29	-	-	74	-23.71	54	256	H
	* 1.289	33.91	MAv1	30	-26.2	37.71	54	-16.29	-	-	54	256	H
4	* 1.18	45.91	PK2	28.9	-26	48.81	-	-	74	-25.19	242	382	V
	* 1.18	33.76	MAv1	28.9	-26	36.66	54	-17.34	-	-	242	382	V
2	* 4.823	41.51	PK2	34.1	-30.1	45.51	-	-	74	-28.49	104	230	H
	* 4.82	29.89	MAv1	34.1	-30.2	33.79	54	-20.21	-	-	104	230	H
3	* 11.898	35.89	PK2	39	-22.3	52.59	-	-	74	-21.41	118	265	H
	* 11.897	24.29	MAv1	39	-22.3	40.99	54	-13.01	-	-	118	265	H
5	* 7.436	39.38	PK2	35.7	-27.9	47.18	-	-	74	-26.82	194	353	V
	* 7.435	27.17	MAv1	35.7	-27.9	34.97	54	-19.03	-	-	194	353	V
6	* 10.794	37.09	PK2	37.9	-23	51.99	-	-	74	-22.01	311	152	V
	* 10.795	25.35	MAv1	37.9	-23	40.25	54	-13.75	-	-	311	152	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

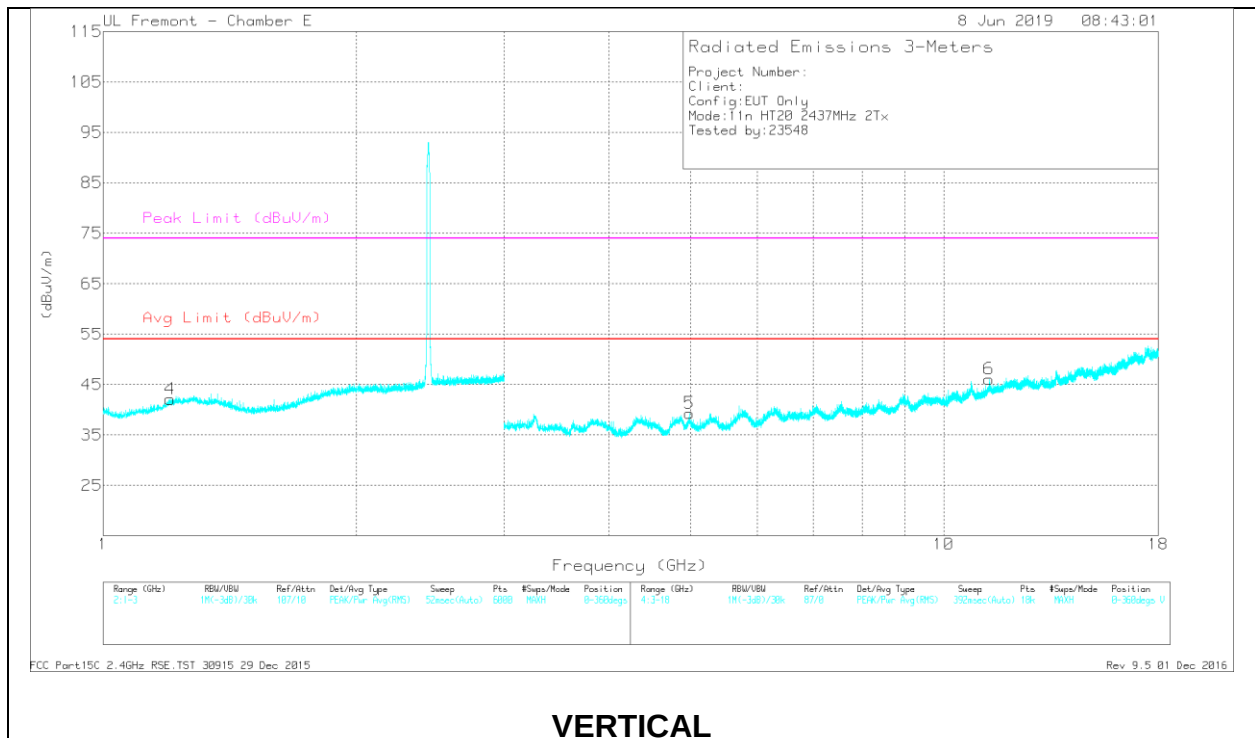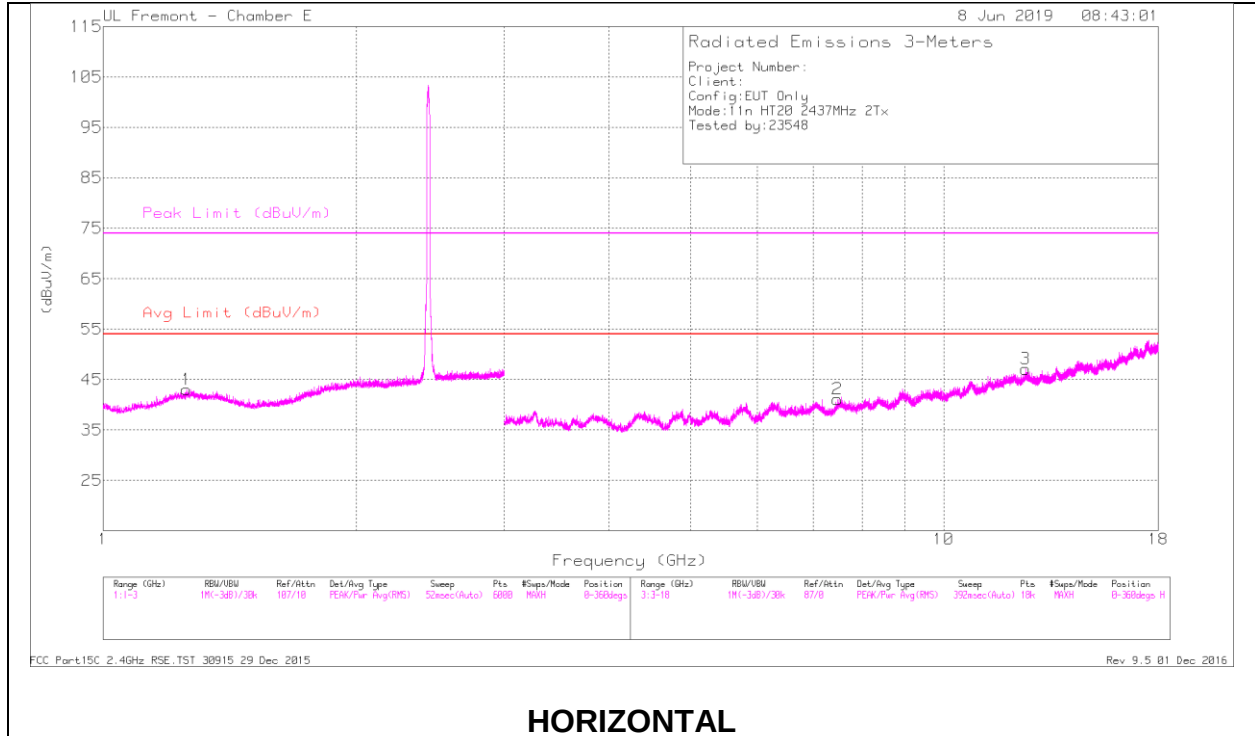

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.258	45.99	PK2	29.9	-26.1	49.79	-	-	74	-24.21	229	105	H
	* 1.258	33.8	MAv1	29.9	-26.1	37.6	54	-16.4	-	-	229	105	H
4	* 1.201	46.22	PK2	29.6	-26.1	49.72	-	-	74	-24.28	337	109	V
	* 1.201	33.74	MAv1	29.6	-26.1	37.24	54	-16.76	-	-	337	109	V
2	* 7.476	39.08	PK2	35.8	-27.1	47.78	-	-	74	-26.22	231	128	H
	* 7.474	27.08	MAv1	35.8	-27.1	35.78	54	-18.22	-	-	231	128	H
3	* 12.514	35.49	PK2	39	-21.5	52.99	-	-	74	-21.01	178	210	H
	* 12.512	23.9	MAv1	39	-21.5	41.4	54	-12.6	-	-	178	210	H
5	* 4.979	42.03	PK2	34.1	-30.3	45.83	-	-	74	-28.17	217	137	V
	* 4.981	30.54	MAv1	34.1	-30.3	34.34	54	-19.66	-	-	217	137	V
6	* 11.318	35.93	PK2	38.1	-22.1	51.93	-	-	74	-22.07	10	384	V
	* 11.317	24.31	MAv1	38.1	-22.1	40.31	54	-13.69	-	-	10	384	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

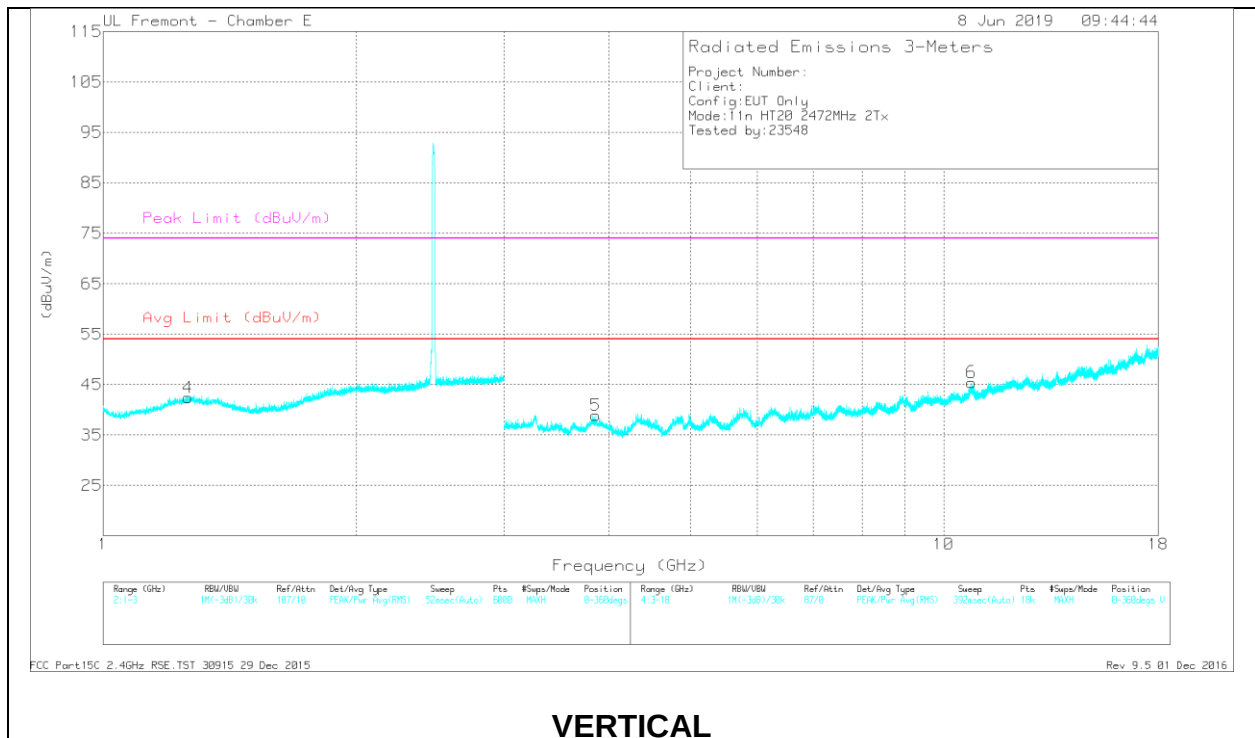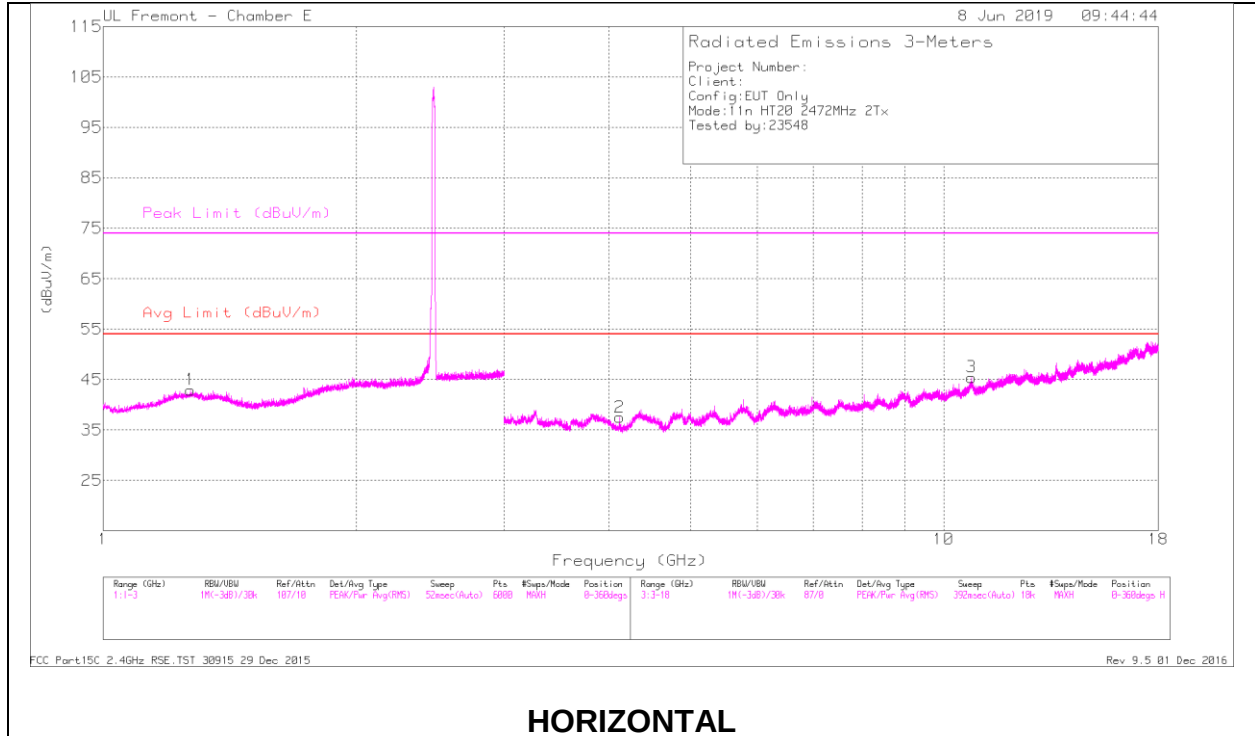

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.27	46.04	PK2	30.1	-26.2	49.94	-	-	74	-24.06	44	346	H
	* 1.271	33.84	MAv1	30.1	-26.2	37.74	54	-16.26	-	-	44	346	H
4	* 1.263	46.47	PK2	30	-26.2	50.27	-	-	74	-23.73	26	398	V
	* 1.264	33.85	MAv1	30	-26.1	37.75	54	-16.25	-	-	26	398	V
2	* 4.119	41.51	PK2	33.6	-32.3	42.81	-	-	74	-31.19	238	195	H
	* 4.117	30.21	MAv1	33.6	-32.3	31.51	54	-22.49	-	-	238	195	H
3	* 10.799	37.88	PK2	37.9	-23	52.78	-	-	74	-21.22	290	159	H
	* 10.801	25.34	MAv1	37.9	-23.1	40.14	54	-13.86	-	-	290	159	H
5	* 3.855	42.16	PK2	33.5	-30.5	45.16	-	-	74	-28.84	19	163	V
	* 3.857	30.59	MAv1	33.5	-30.5	33.59	54	-20.41	-	-	19	163	V
6	* 10.798	37.14	PK2	37.9	-23	52.04	-	-	74	-21.96	353	145	V
	* 10.798	25.4	MAv1	37.9	-23	40.3	54	-13.7	-	-	353	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.3. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND

Antenna 4 LEGACY SISO MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

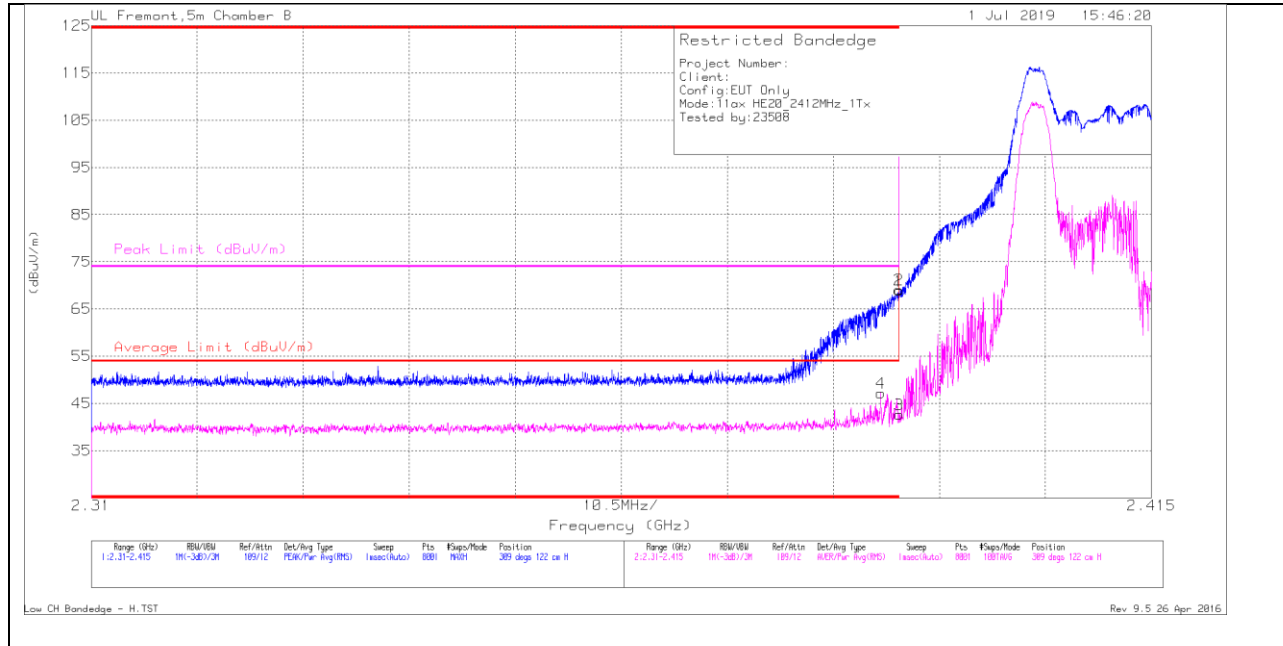


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.388	34.22	RMS	31.9	-18.9	47.22	54	-6.78	-	-	309	122	H
1	* 2.39	55.91	Pk	31.9	-18.9	68.91	-	-	74	-5.09	309	122	H
2	* 2.39	56.07	Pk	31.9	-18.9	69.07	-	-	74	-4.93	309	122	H
3	* 2.39	29.69	RMS	31.9	-18.9	42.69	54	-11.31	-	-	309	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

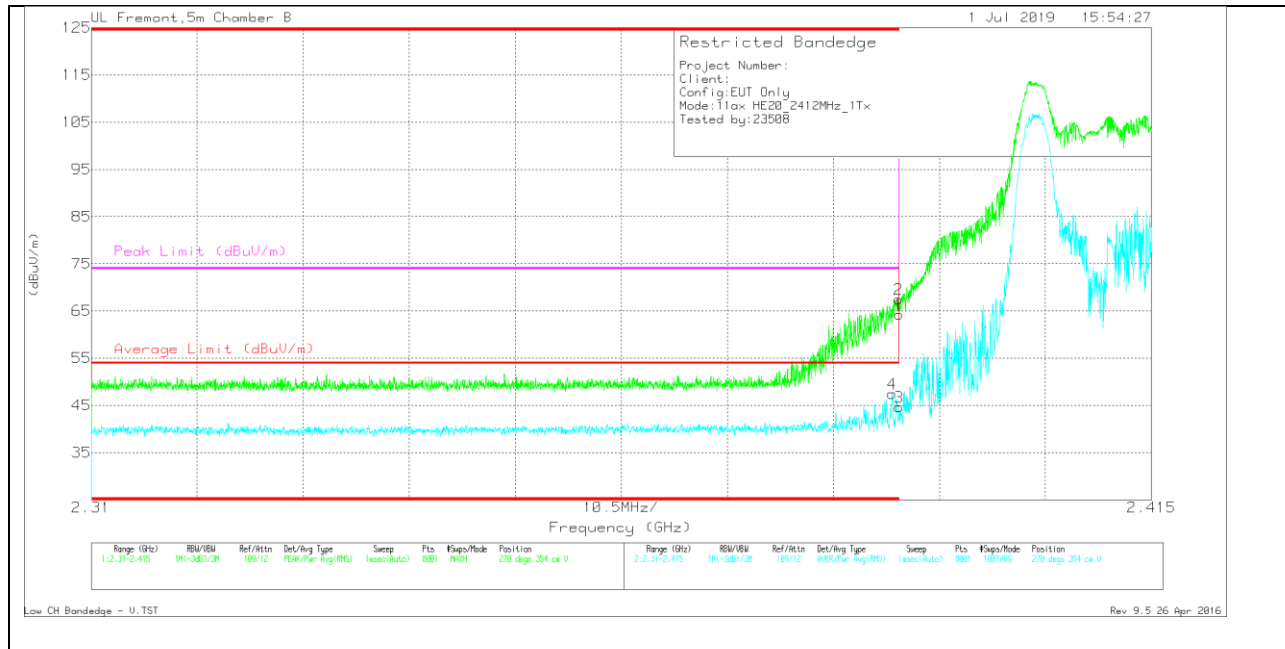

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.389	34.48	RMS	31.9	-18.9	47.48	54	-6.52	-	-	270	354	V
1	* 2.39	51.29	Pk	31.9	-18.9	64.29	-	-	74	-9.71	270	354	V
2	* 2.39	54.49	Pk	31.9	-18.9	67.49	-	-	74	-6.51	270	354	V
3	* 2.39	31.64	RMS	31.9	-18.9	44.64	54	-9.36	-	-	270	354	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

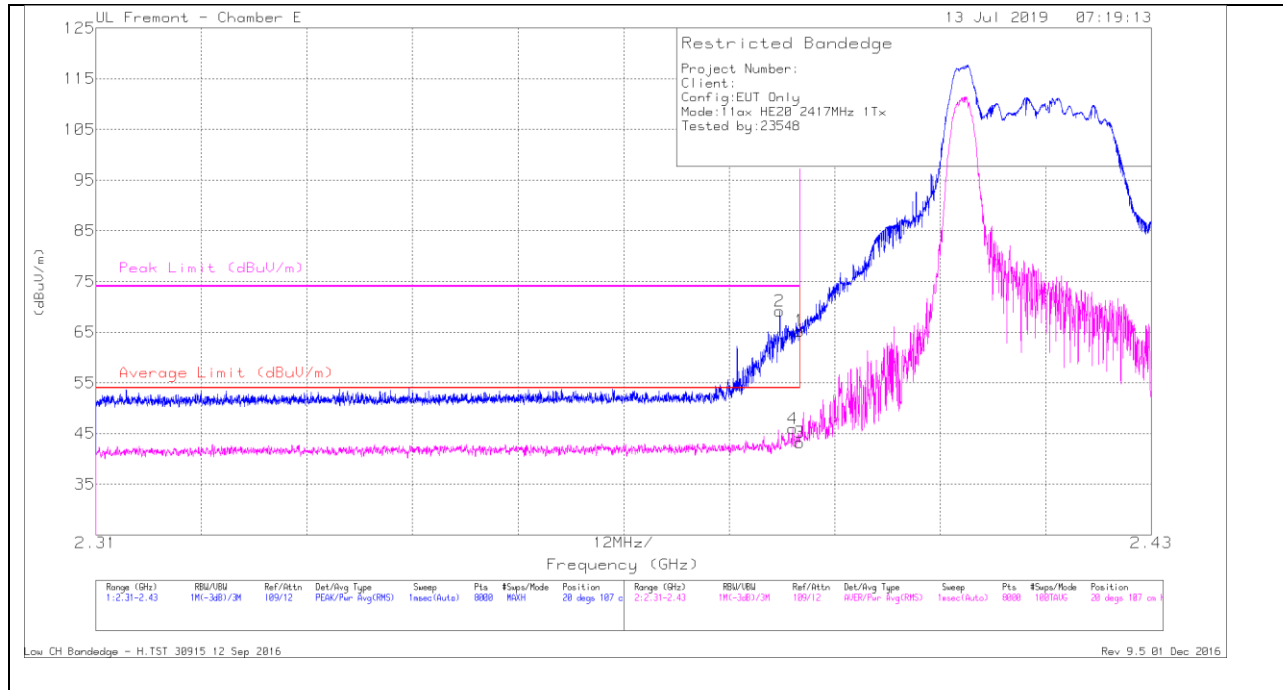

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.25	Pk	32.3	-18.3	65.25	-	-	74	-8.75	20	107	H
2	* 2.388	55.13	Pk	32.3	-18.3	69.13	-	-	74	-4.87	20	107	H
3	* 2.39	29.18	RMS	32.3	-18.3	43.18	54	-10.82	-	-	20	107	H
4	* 2.389	31.99	RMS	32.3	-18.3	45.99	54	-8.01	-	-	20	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

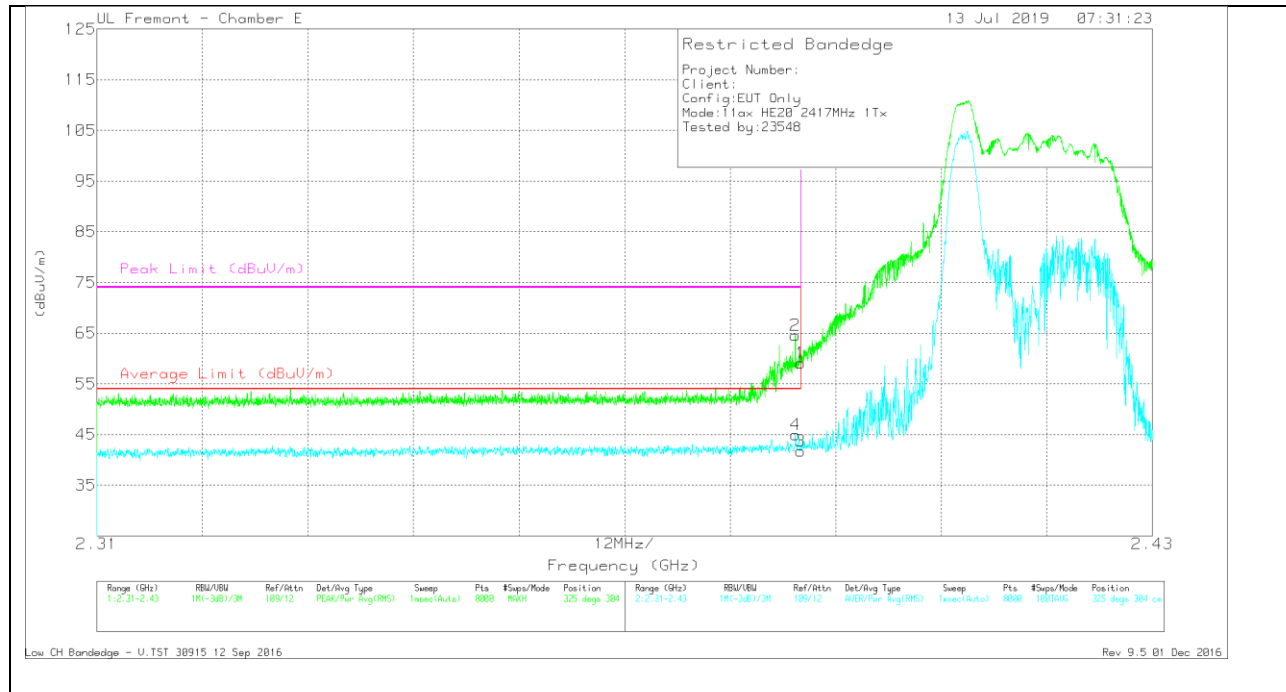

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.09	Pk	32.3	-18.3	59.09	-	-	74	-14.91	325	304	V
2	* 2.389	50.53	Pk	32.3	-18.3	64.53	-	-	74	-9.47	325	304	V
3	* 2.39	27.77	RMS	32.3	-18.3	41.77	54	-12.23	-	-	325	304	V
4	* 2.389	30.93	RMS	32.3	-18.3	44.93	54	-9.07	-	-	325	304	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

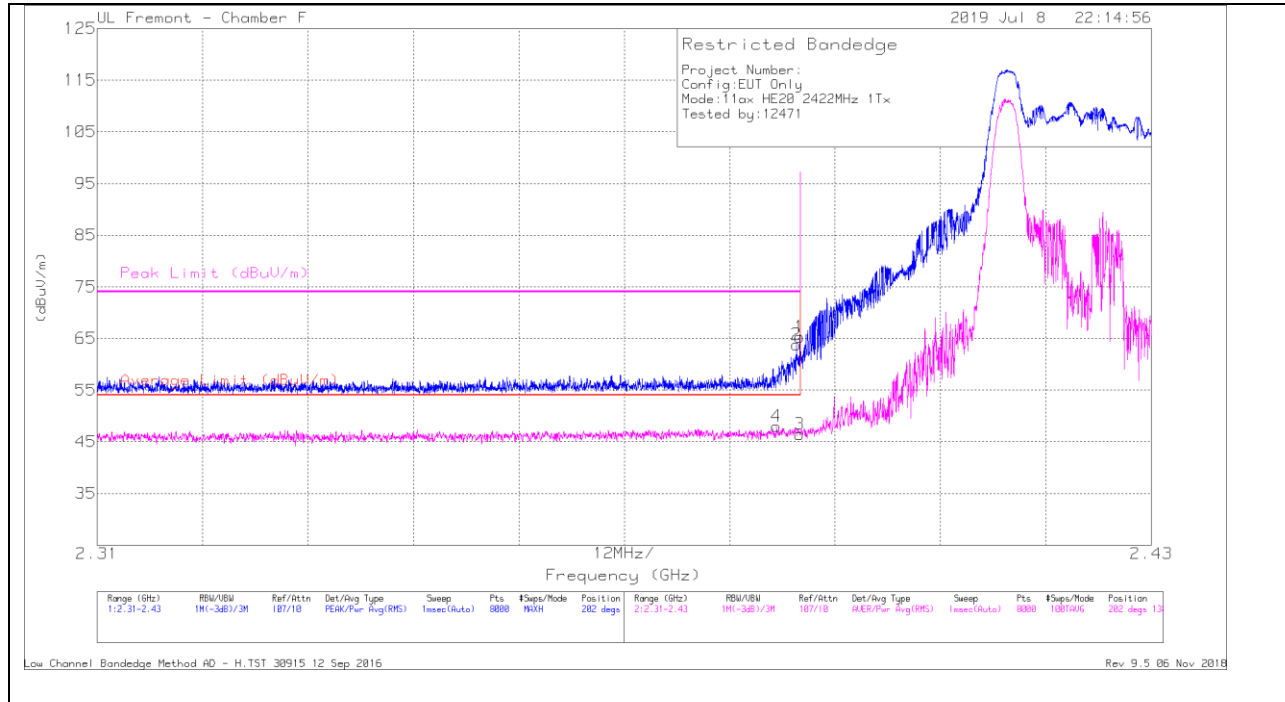


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.81	Pk	32	-14.5	65.31	-	-	74	-8.69	202	138	H
2	* 2.39	46.31	Pk	32	-14.5	63.81	-	-	74	-10.19	202	138	H
3	* 2.39	28.97	RMS	32	-14.5	46.47	54	-7.53	-	-	202	138	H
4	* 2.387	30.57	RMS	31.9	-14.5	47.97	54	-6.03	-	-	202	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

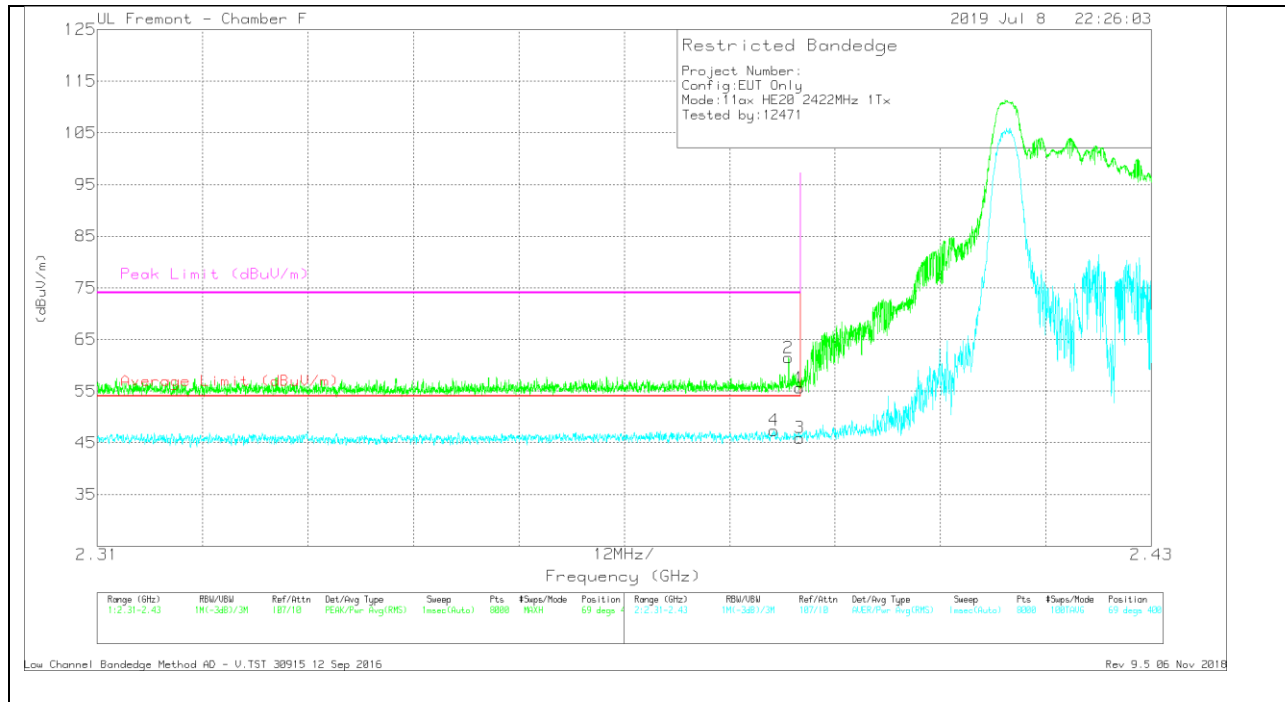

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.13	Pk	32	-14.5	55.63	-	-	74	-18.37	69	400	V
2	* 2.389	43.94	Pk	32	-14.5	61.44	-	-	74	-12.56	69	400	V
3	* 2.39	28.45	RMS	32	-14.5	45.95	54	-8.05	-	-	69	400	V
4	* 2.387	29.99	RMS	31.9	-14.5	47.39	54	-6.61	-	-	69	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 4 LEGACY SISO MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

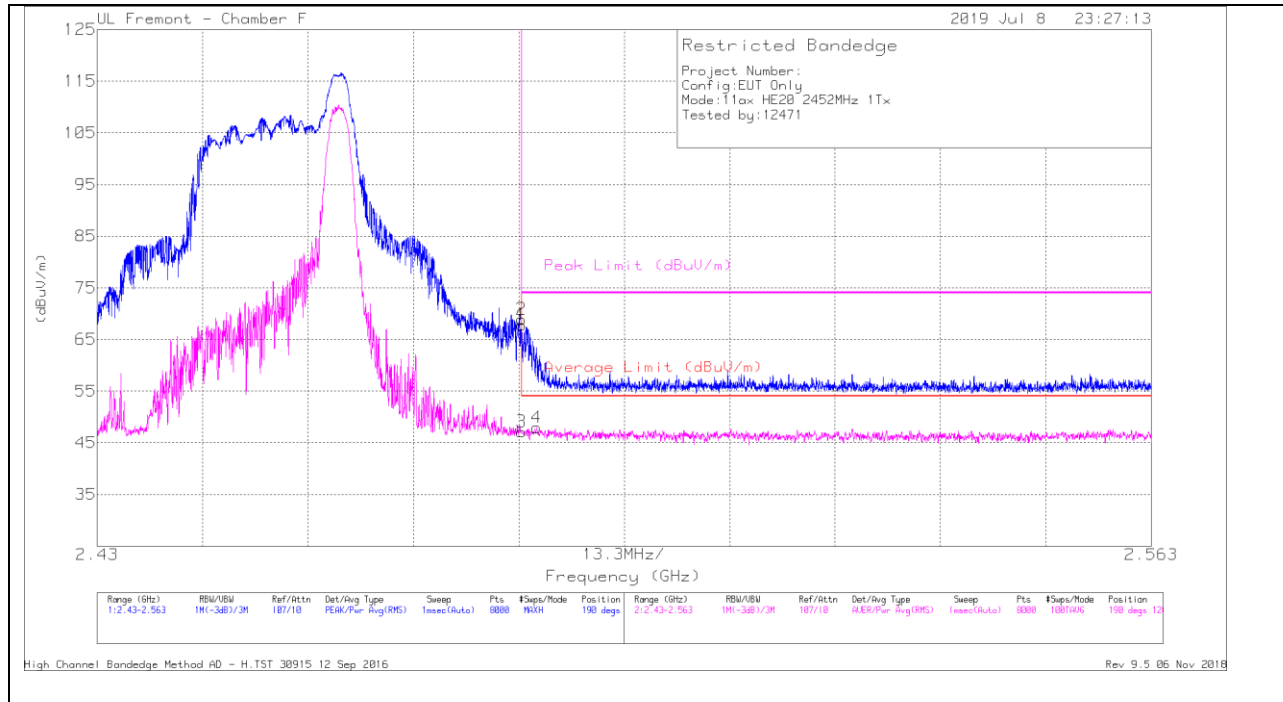


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.16	Pk	32.4	-14.7	67.86	-	-	74	-6.14	190	126	H
2	* 2.484	51.2	Pk	32.4	-14.7	68.9	-	-	74	-5.1	190	126	H
3	* 2.484	29.42	RMS	32.4	-14.7	47.12	54	-6.88	-	-	190	126	H
4	* 2.485	30.12	RMS	32.4	-14.6	47.92	54	-6.08	-	-	190	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

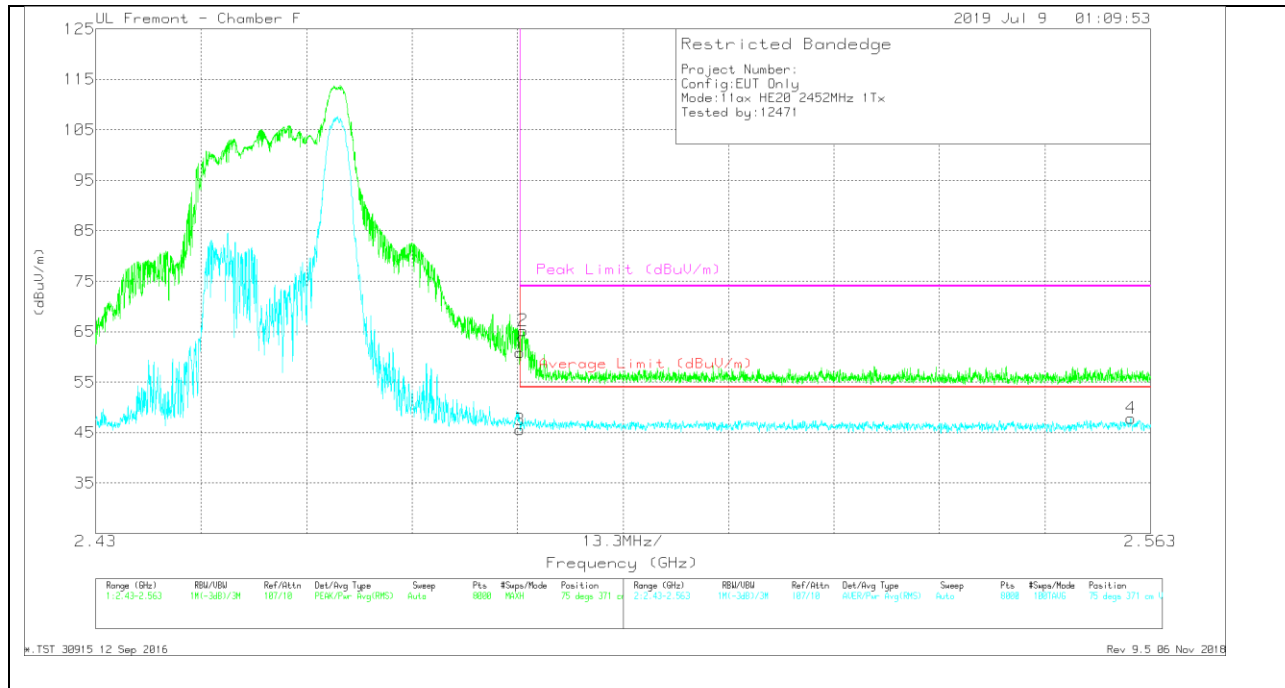

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.09	Pk	32.4	-14.7	60.79	-	-	74	-13.21	75	371	V
2	* 2.484	47.55	Pk	32.4	-14.7	65.25	-	-	74	-8.75	75	371	V
3	* 2.484	27.93	RMS	32.4	-14.7	45.63	54	-8.37	-	-	75	371	V
4	2.561	30.07	RMS	32.4	-14.6	47.87	54	-6.13	-	-	75	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

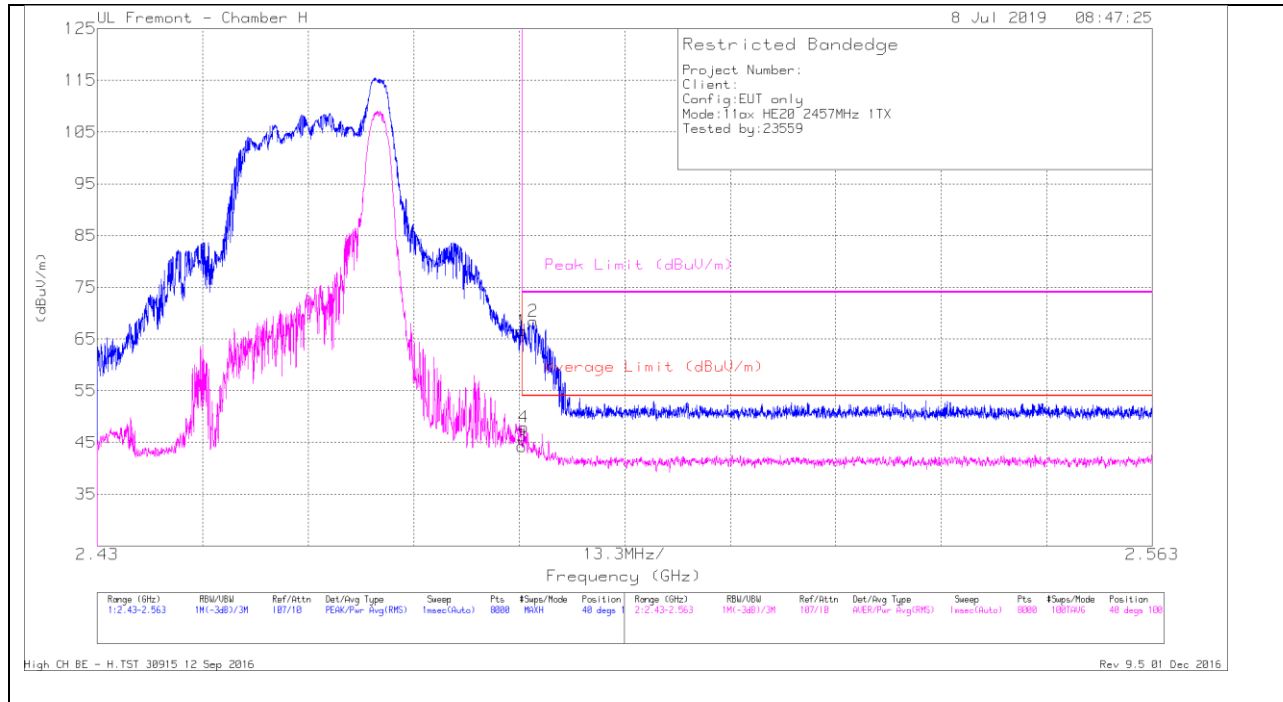


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.36	Pk	32.5	-23.3	66.56	-	-	74	-7.44	40	100	H
2	* 2.485	59.21	Pk	32.5	-23.3	68.41	-	-	74	-5.59	40	100	H
3	* 2.484	35.08	RMS	32.5	-23.3	44.28	54	-9.72	-	-	40	100	H
4	* 2.484	38.75	RMS	32.5	-23.3	47.95	54	-6.05	-	-	40	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

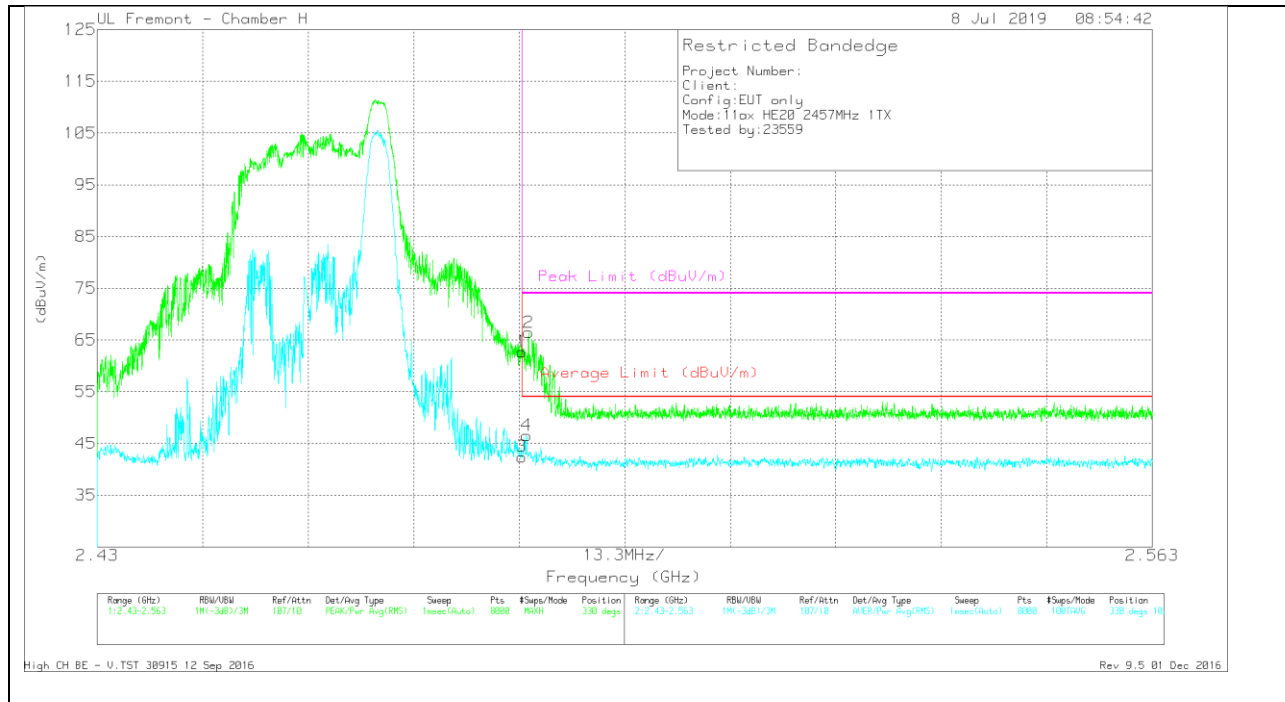

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.51	Pk	32.5	-23.3	62.71	-	-	74	-11.29	330	102	V
2	* 2.484	57.25	Pk	32.5	-23.3	66.45	-	-	74	-7.55	330	102	V
3	* 2.484	33.23	RMS	32.5	-23.3	42.43	54	-11.57	-	-	330	102	V
4	* 2.484	37.35	RMS	32.5	-23.3	46.55	54	-7.45	-	-	330	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

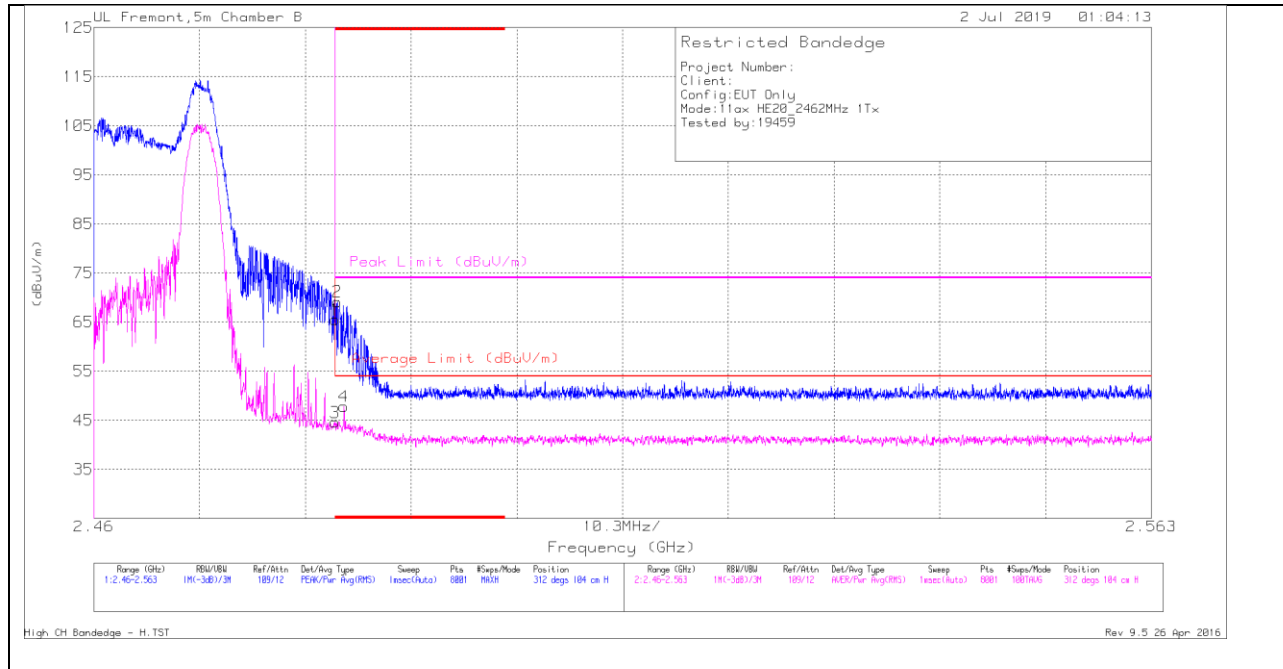


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.1	Pk	32.3	-18.9	65.5	-	-	74	-8.5	312	104	H
2	* 2.484	55.77	Pk	32.3	-18.9	69.17	-	-	74	-4.83	312	104	H
3	* 2.484	31.21	RMS	32.3	-18.9	44.61	54	-9.39	-	-	312	104	H
4	* 2.484	34.47	RMS	32.3	-18.9	47.87	54	-6.13	-	-	312	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

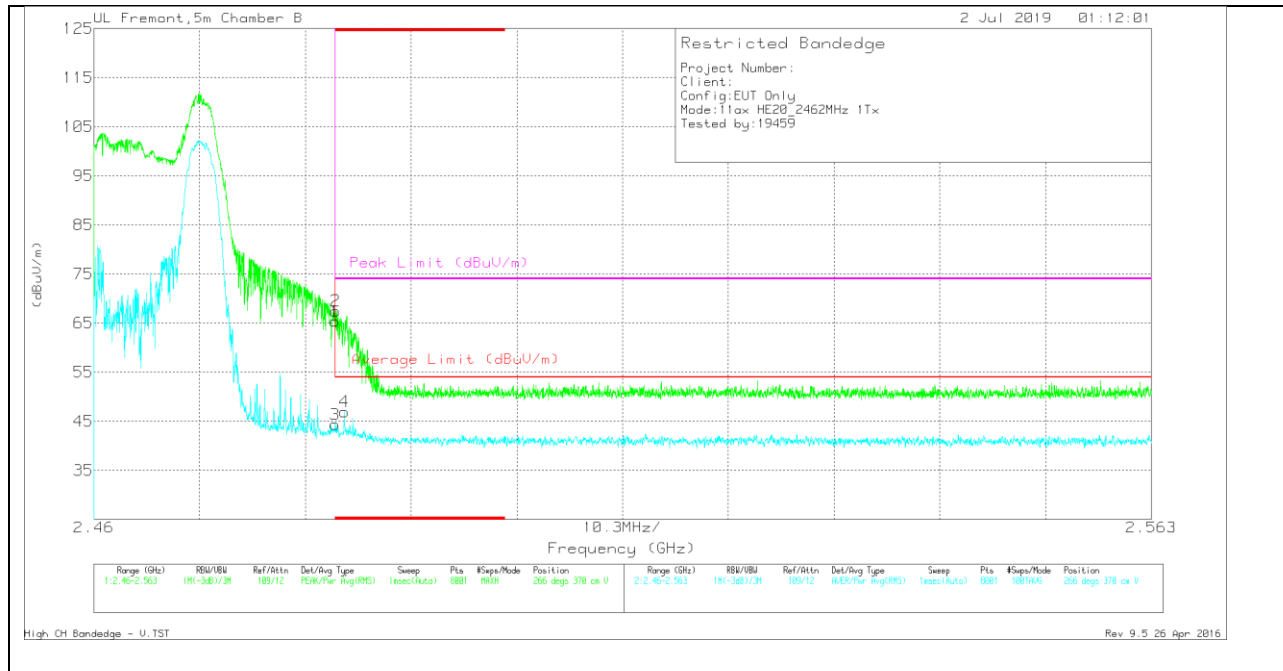

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.99	Pk	32.3	-18.9	65.39	-	-	74	-8.61	266	370	V
2	* 2.484	54.1	Pk	32.3	-18.9	67.5	-	-	74	-6.5	266	370	V
3	* 2.484	30.98	RMS	32.3	-18.9	44.38	54	-9.62	-	-	266	370	V
4	* 2.484	33.59	RMS	32.3	-18.9	46.99	54	-7.01	-	-	266	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

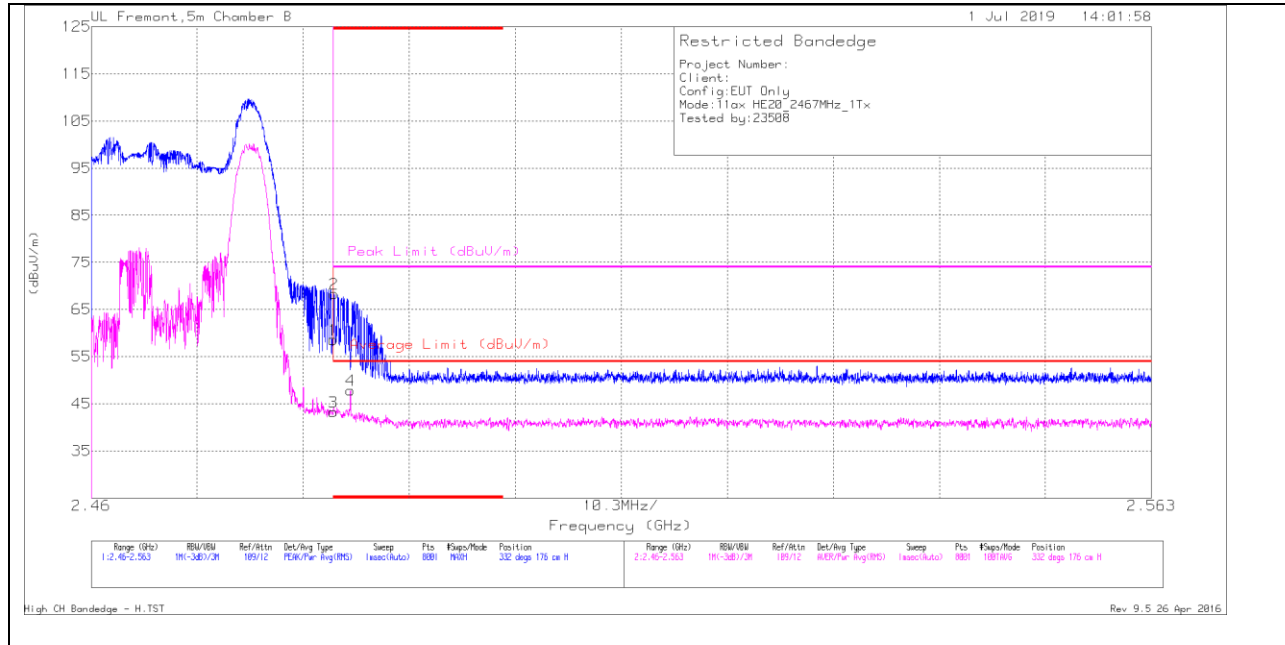

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.22	Pk	32.3	-18.9	58.62	-	-	74	-15.38	332	176	H
2	* 2.484	54.95	Pk	32.3	-18.9	68.35	-	-	74	-5.65	332	176	H
3	* 2.484	29.88	RMS	32.3	-18.9	43.28	54	-10.72	-	-	332	176	H
4	* 2.485	34.47	RMS	32.3	-18.9	47.87	54	-6.13	-	-	332	176	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.23	Pk	32.3	-18.9	61.63	-	-	74	-12.37	142	324	V
2	* 2.484	49.19	Pk	32.3	-18.9	62.59	-	-	74	-11.41	142	324	V
3	* 2.484	27.83	RMS	32.3	-18.9	41.23	54	-12.77	-	-	142	324	V
4	* 2.486	28.89	RMS	32.3	-18.9	42.29	54	-11.71	-	-	142	324	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

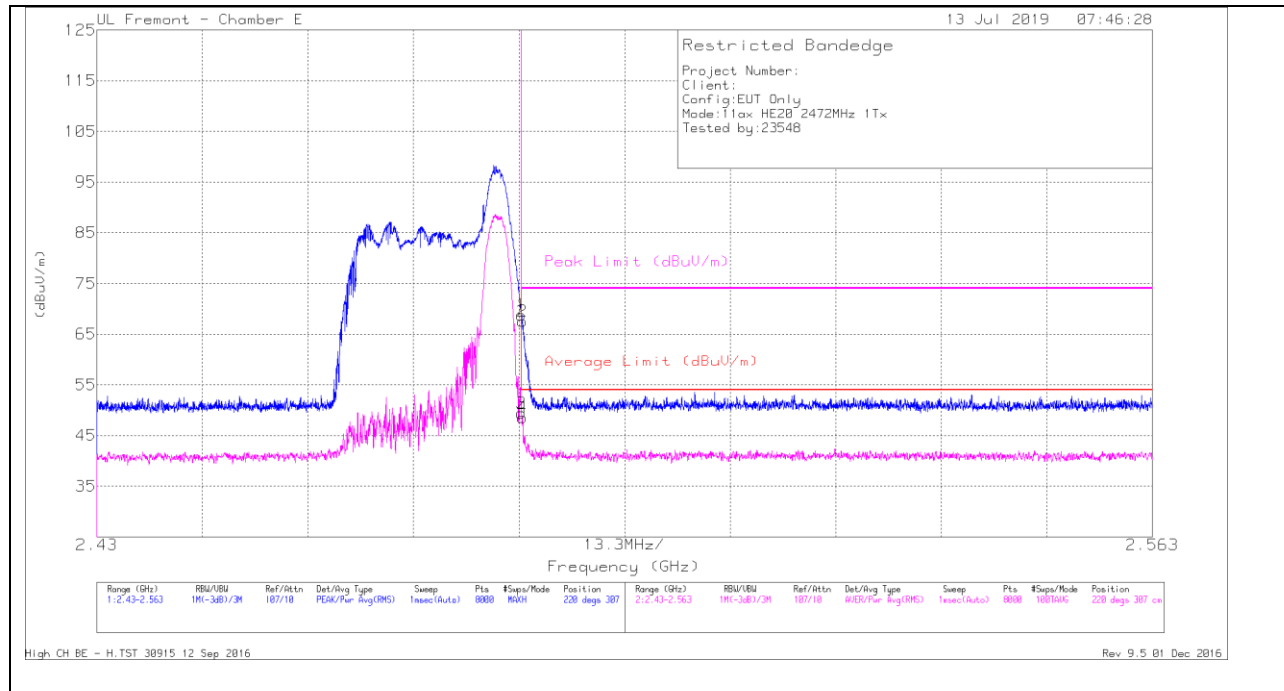

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	62.33	Pk	32.8	-26.3	68.83	-	-	74	-5.17	220	307	H
2	* 2.484	61.03	Pk	32.8	-26.3	67.53	-	-	74	-6.47	220	307	H
3	* 2.484	42.88	RMS	32.8	-26.3	49.38	54	-4.62	-	-	220	307	H
4	* 2.484	42.08	RMS	32.8	-26.3	48.58	54	-5.42	-	-	220	307	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection