


VERTICAL RESULT

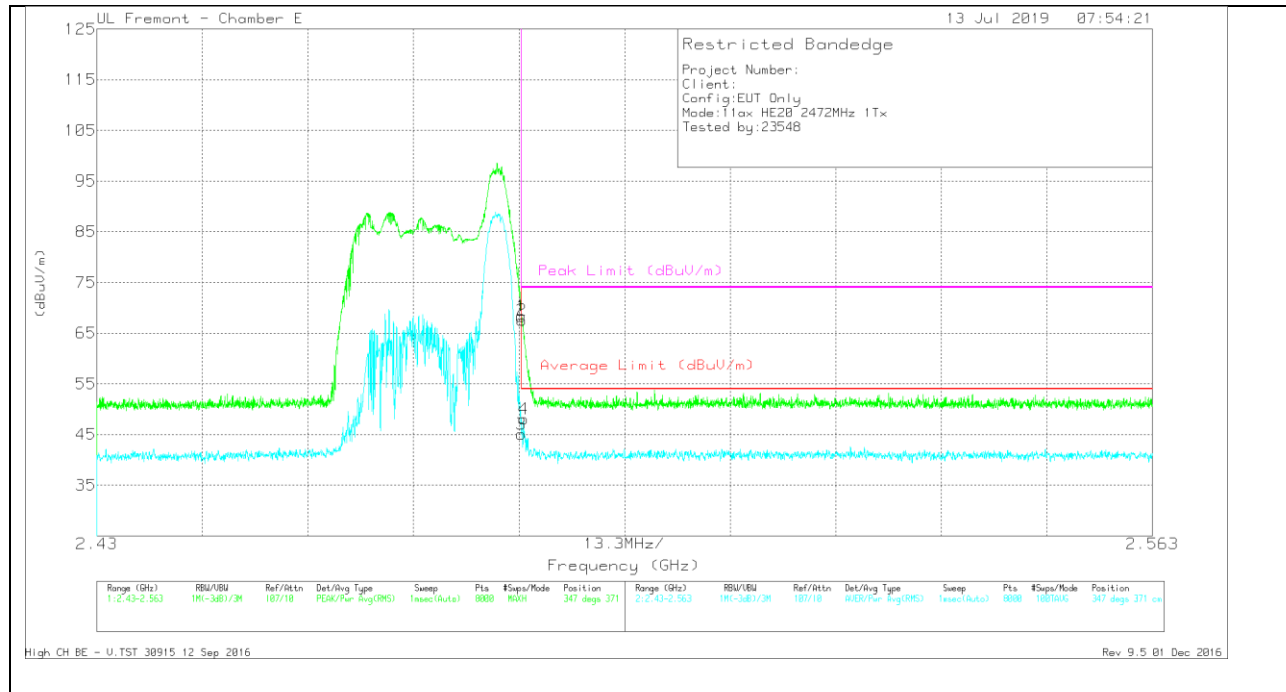

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Chl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	61.86	Pk	32.8	-26.3	68.36	-	-	74	-5.64	347	371	V
2	* 2.484	61.04	Pk	32.8	-26.3	67.54	-	-	74	-6.46	347	371	V
3	* 2.484	38.59	RMS	32.8	-26.3	45.09	54	-8.91	-	-	347	371	V
4	* 2.484	41.61	RMS	32.8	-26.3	48.11	54	-5.89	-	-	347	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 4 LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

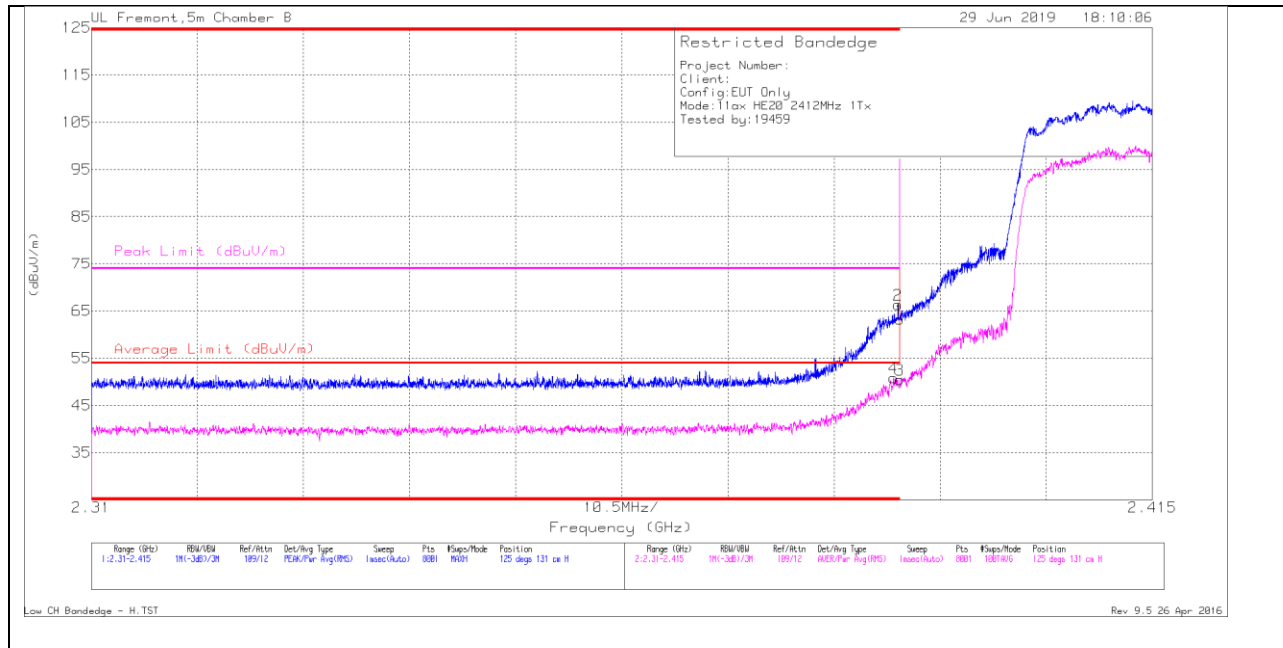


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.26	Pk	31.9	-18.9	63.26	-	-	74	-10.74	125	131	H
2	* 2.39	53.33	Pk	31.9	-18.9	66.33	-	-	74	-7.67	125	131	H
3	* 2.39	37.48	RMS	31.9	-18.9	50.48	54	-3.52	-	-	125	131	H
4	* 2.389	37.88	RMS	31.9	-18.9	50.88	54	-3.12	-	-	125	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

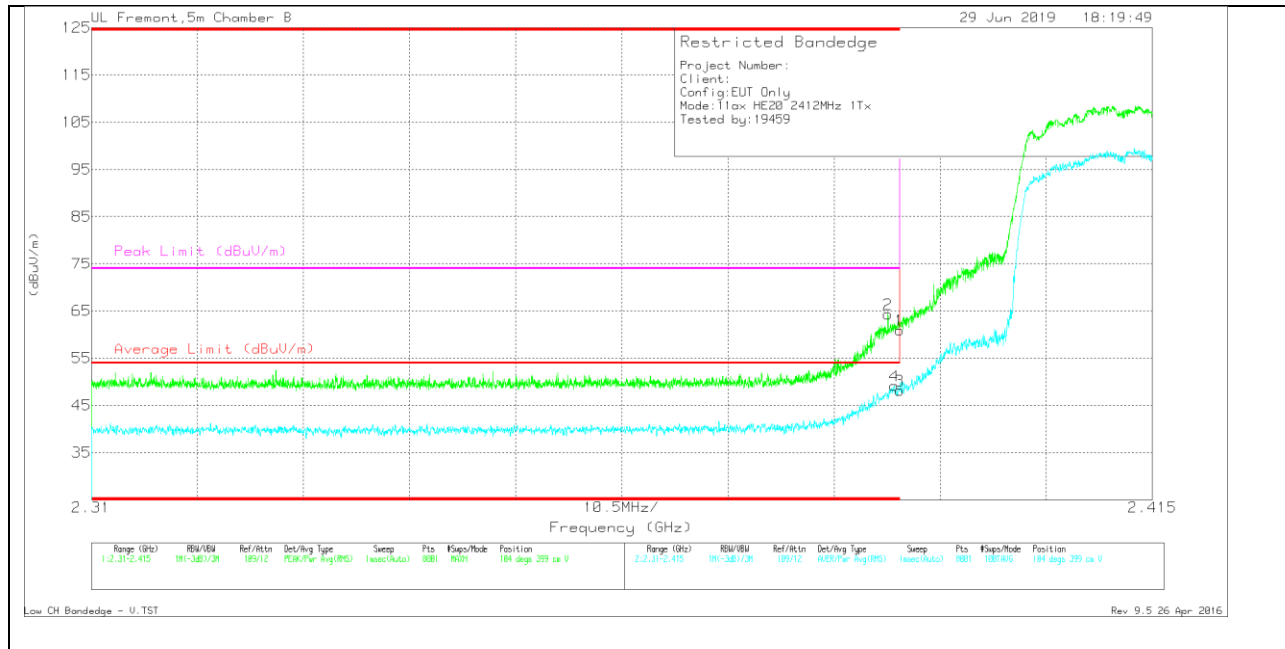

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.96	Pk	31.9	-18.9	60.96	-	-	74	-13.04	104	399	V
2	* 2.389	51.32	Pk	31.9	-18.9	64.32	-	-	74	-9.68	104	399	V
3	* 2.39	35.2	RMS	31.9	-18.9	48.2	54	-5.8	-	-	104	399	V
4	* 2.389	36.17	RMS	31.9	-18.9	49.17	54	-4.83	-	-	104	399	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

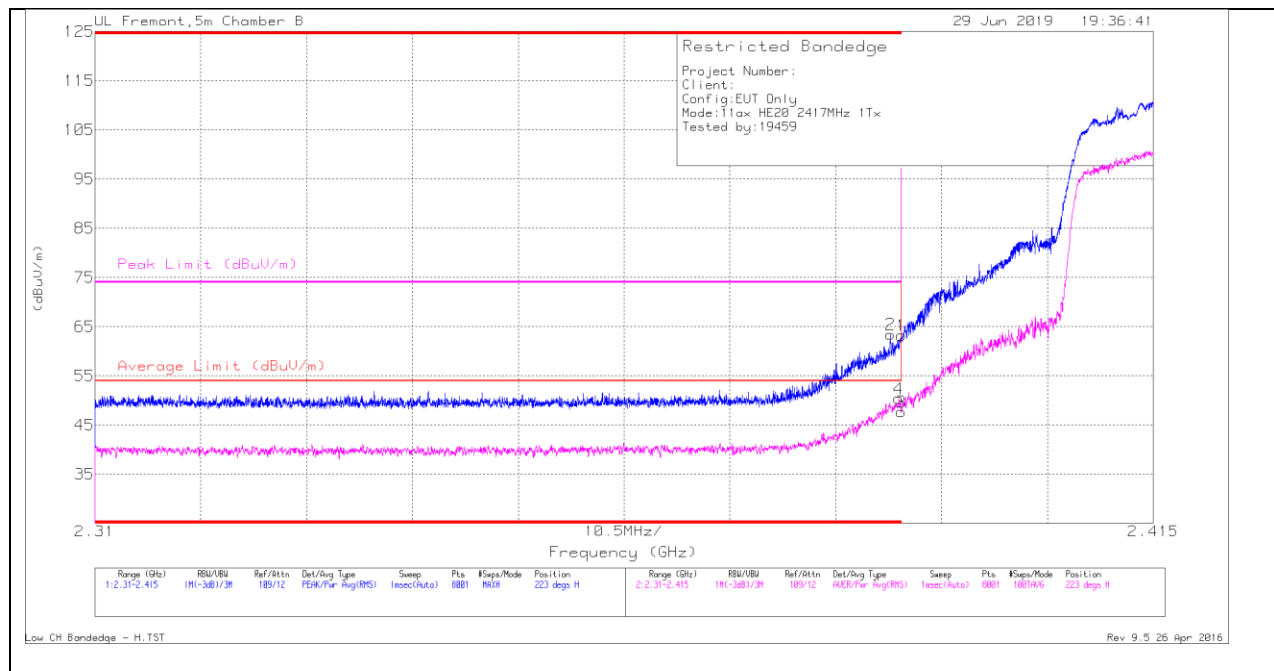


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.24	Pk	31.9	-18.9	63.24	-	-	74	-10.76	223	175	H
2	* 2.389	50.43	Pk	31.9	-18.9	63.43	-	-	74	-10.57	223	175	H
3	* 2.39	34.68	RMS	31.9	-18.9	47.68	54	-6.32	-	-	223	175	H
4	* 2.39	37.38	RMS	31.9	-18.9	50.38	54	-3.62	-	-	223	175	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

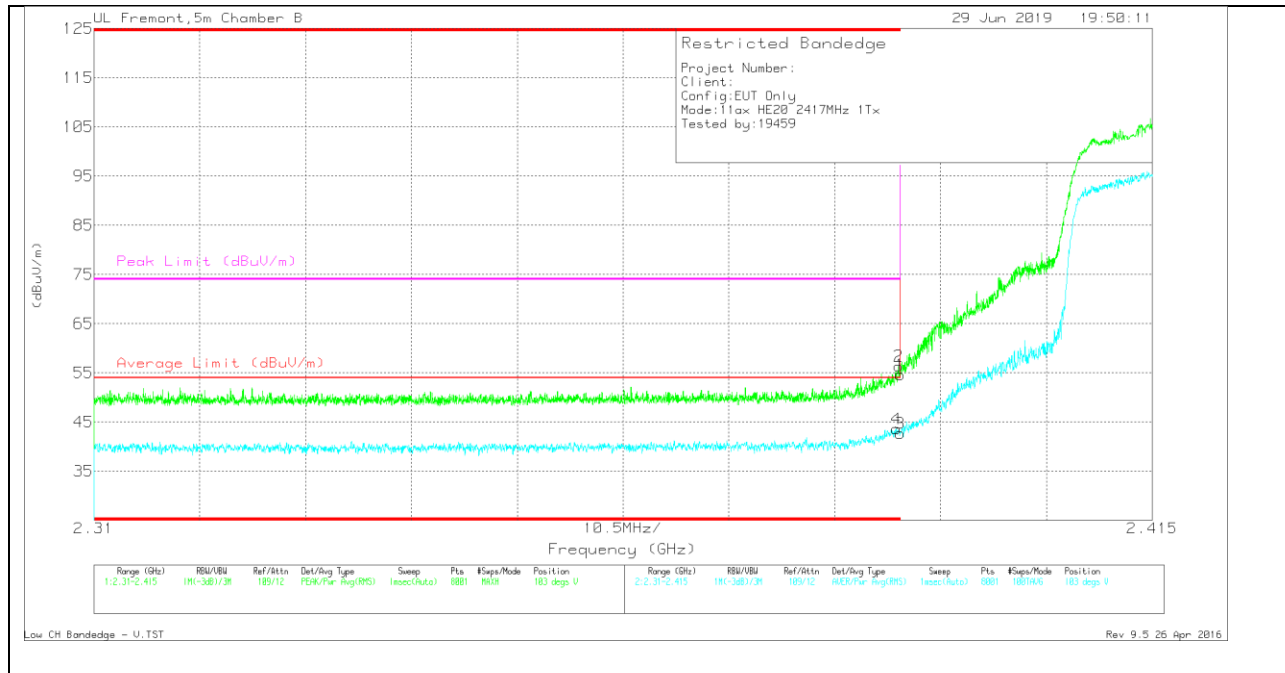

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.64	Pk	31.9	-18.9	54.64	-	-	74	-19.36	103	340	V
2	* 2.39	43.36	Pk	31.9	-18.9	56.36	-	-	74	-17.64	103	340	V
3	* 2.39	29.72	RMS	31.9	-18.9	42.72	54	-11.28	-	-	103	340	V
4	* 2.39	30.63	RMS	31.9	-18.9	43.63	54	-10.37	-	-	103	340	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

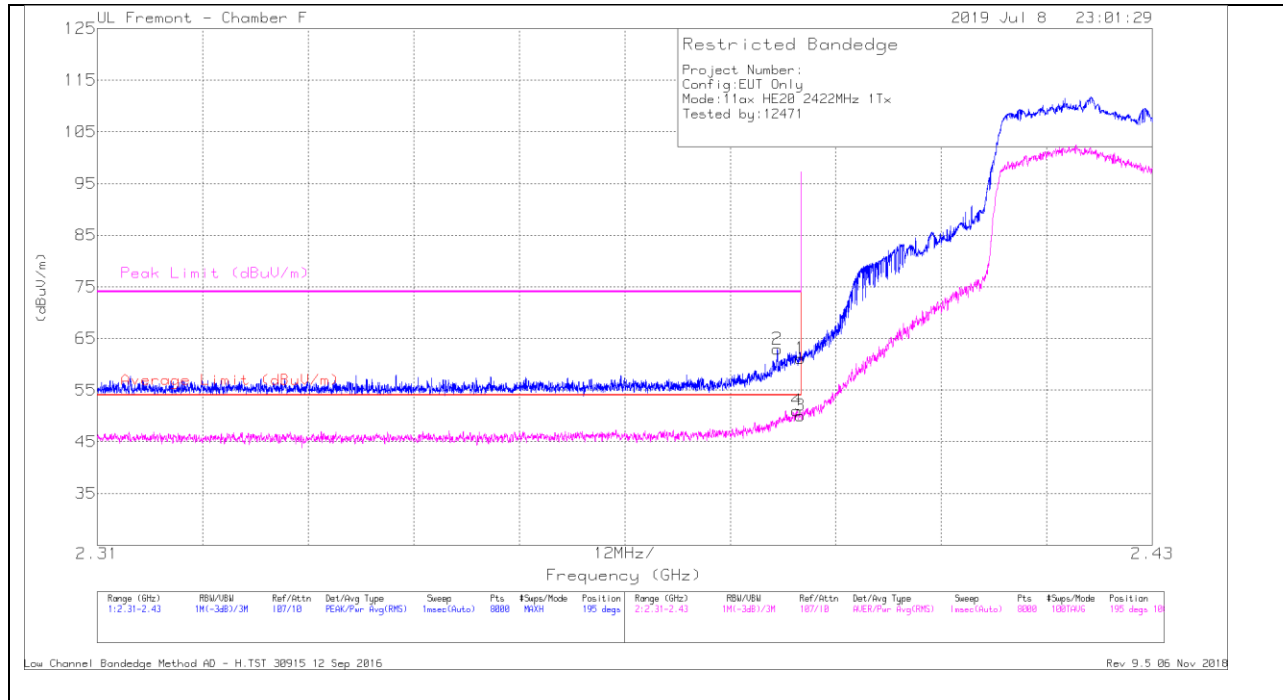


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.62	Pk	32	-14.5	61.12	-	-	74	-12.88	195	106	H
2	* 2.387	45.57	Pk	31.9	-14.5	62.97	-	-	74	-11.03	195	106	H
3	* 2.39	32.59	RMS	32	-14.5	50.09	54	-3.91	-	-	195	106	H
4	* 2.39	33.56	RMS	32	-14.5	51.06	54	-2.94	-	-	195	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

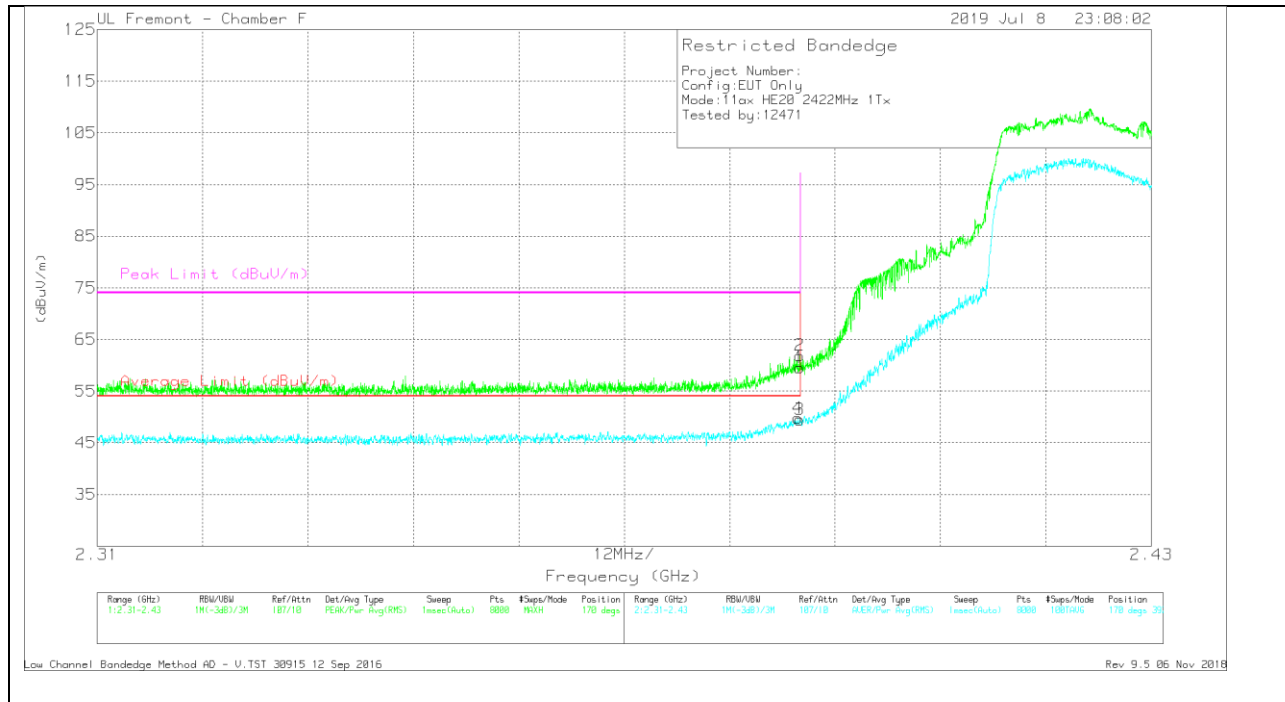

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.07	Pk	32	-14.5	59.57	-	-	74	-14.43	170	392	V
2	* 2.39	44.4	Pk	32	-14.5	61.9	-	-	74	-12.1	170	392	V
3	* 2.39	31.99	RMS	32	-14.5	49.49	54	-4.51	-	-	170	392	V
4	* 2.39	32.26	RMS	32	-14.5	49.76	54	-4.24	-	-	170	392	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

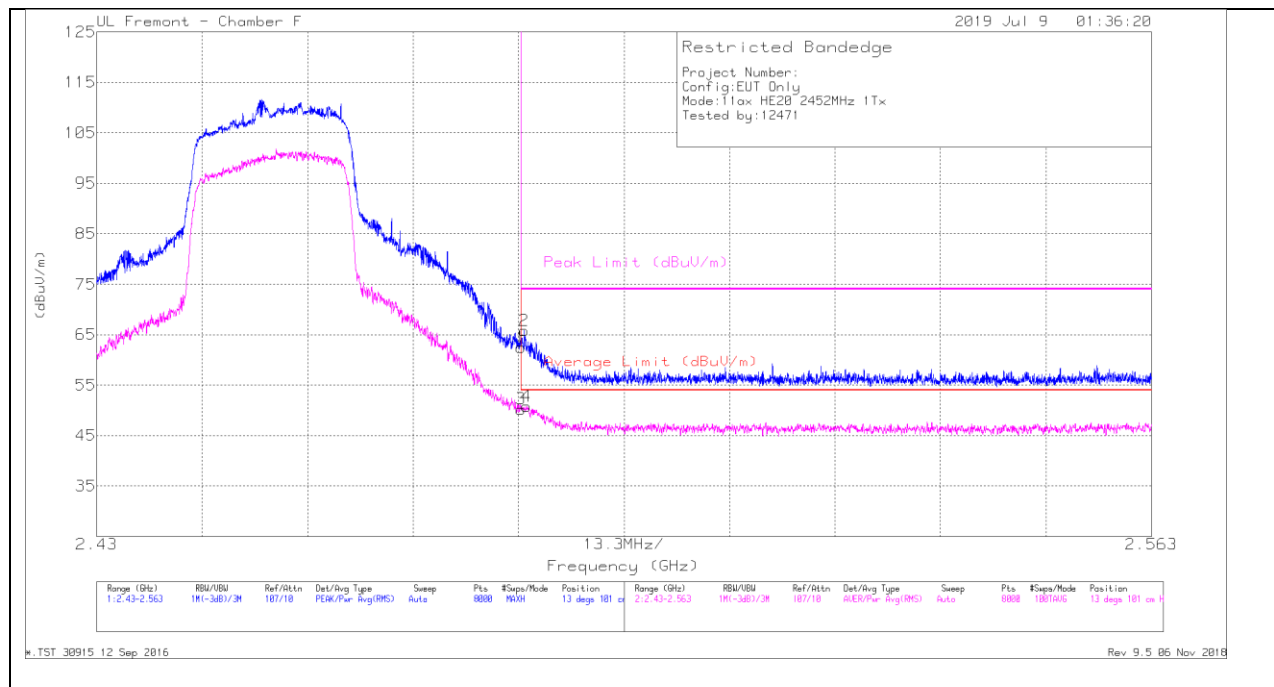


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.76	Pk	32.4	-14.7	62.46	-	-	74	-11.54	13	101	H
2	* 2.484	48.13	Pk	32.4	-14.7	65.83	-	-	74	-8.17	13	101	H
3	* 2.484	32.53	RMS	32.4	-14.7	50.23	54	-3.77	-	-	13	101	H
4	* 2.484	33.08	RMS	32.4	-14.7	50.78	54	-3.22	-	-	13	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

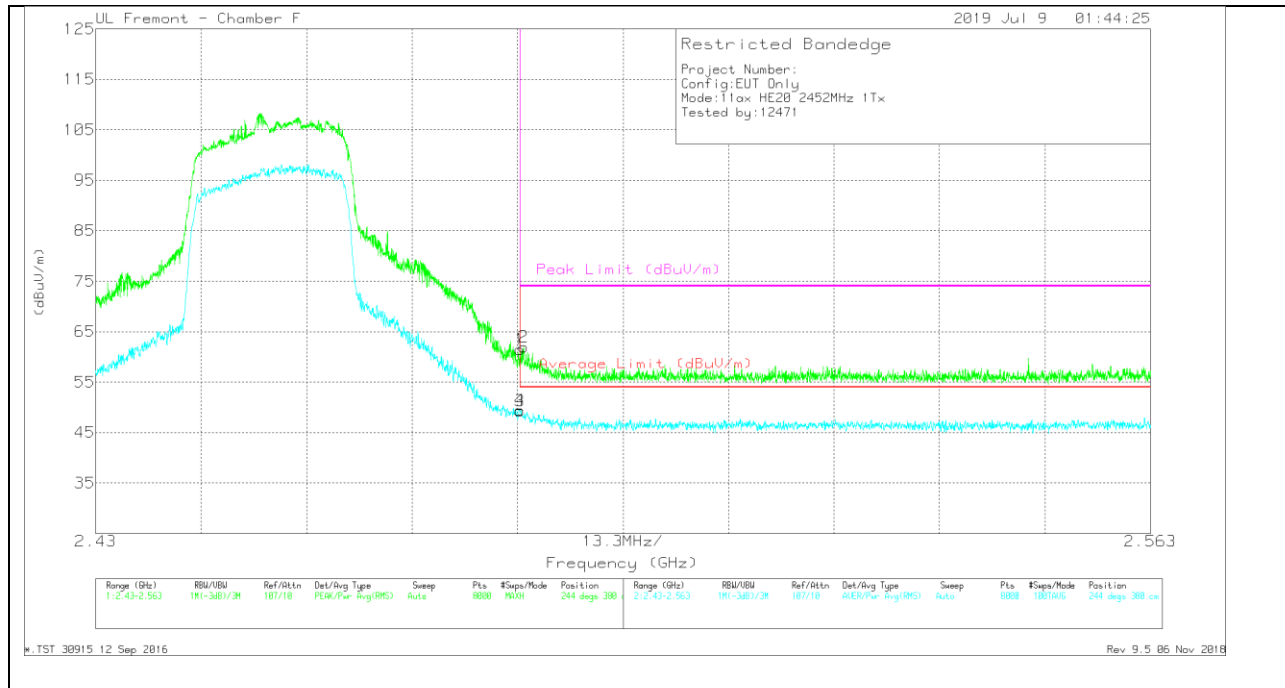

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.79	Pk	32.4	-14.7	61.49	-	-	74	-12.51	244	380	V
2	* 2.484	44.22	Pk	32.4	-14.7	61.92	-	-	74	-12.08	244	380	V
3	* 2.484	31.65	RMS	32.4	-14.7	49.35	54	-4.65	-	-	244	380	V
4	* 2.484	31.77	RMS	32.4	-14.7	49.47	54	-4.53	-	-	244	380	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

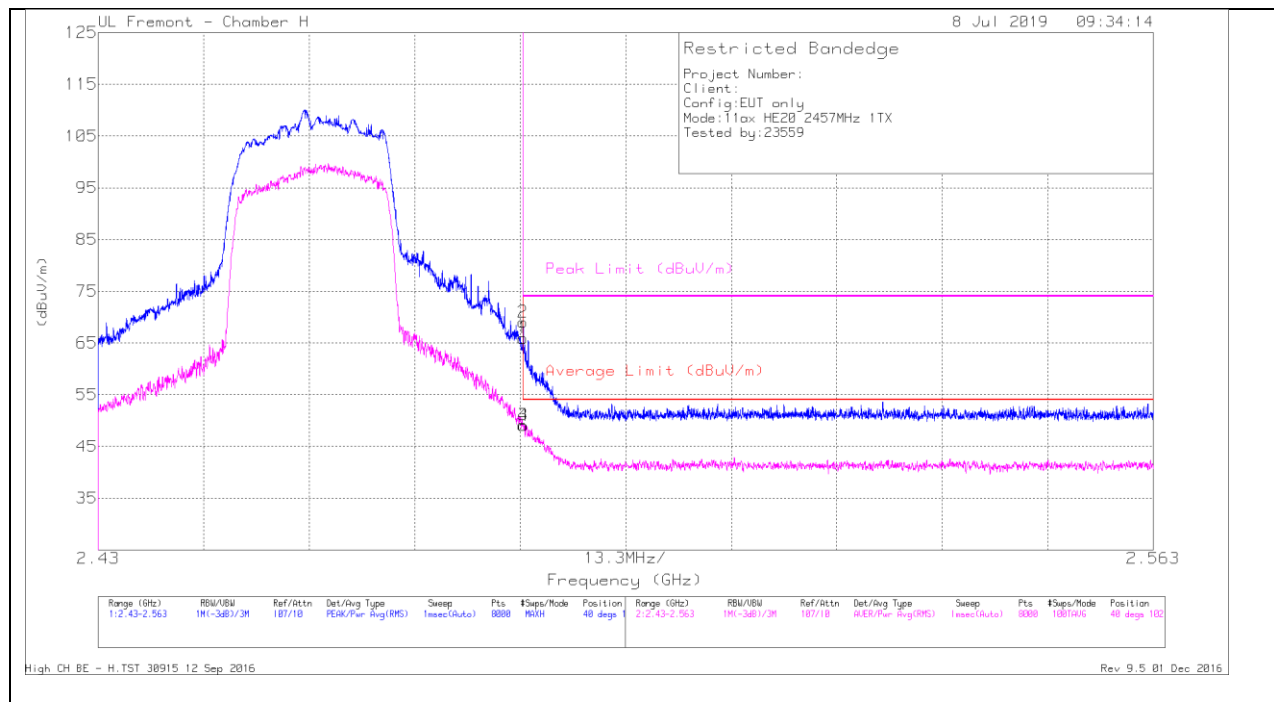


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.73	Pk	32.5	-23.3	65.93	-	-	74	-8.07	40	102	H
2	* 2.484	59.82	Pk	32.5	-23.3	69.02	-	-	74	-4.98	40	102	H
3	* 2.484	39.94	RMS	32.5	-23.3	49.14	54	-4.86	-	-	40	102	H
4	* 2.484	39.89	RMS	32.5	-23.3	49.09	54	-4.91	-	-	40	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

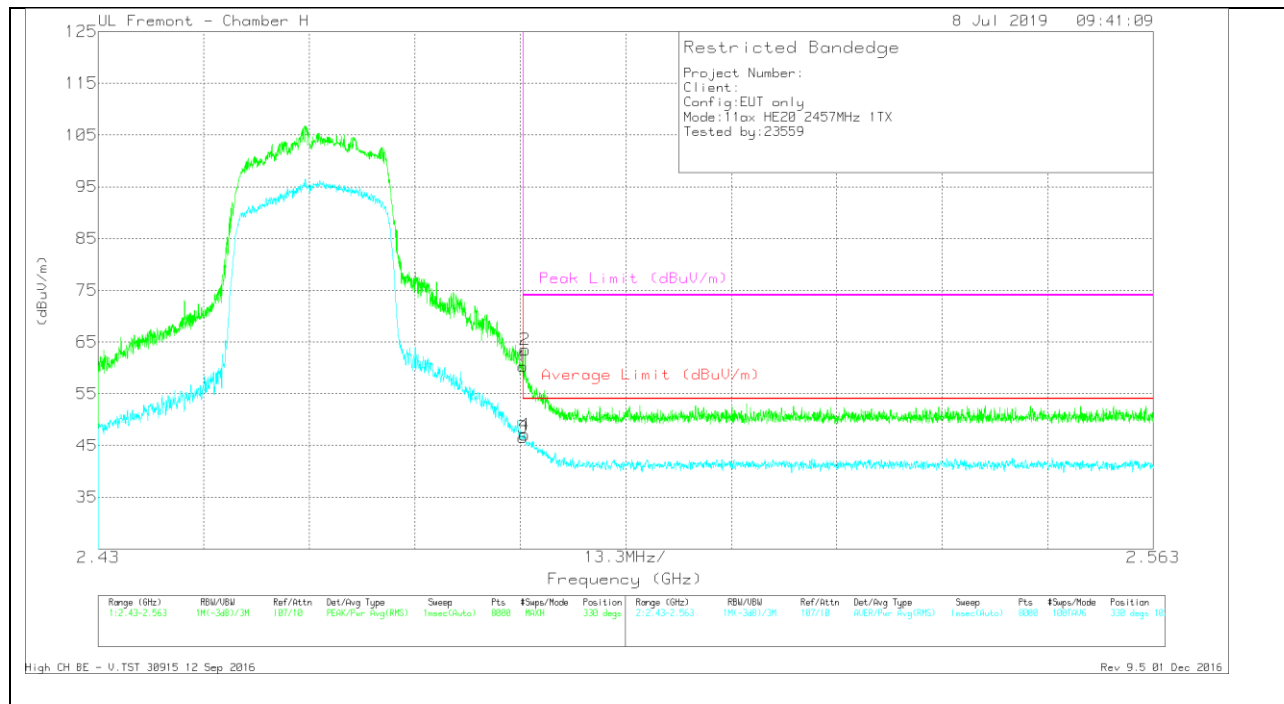

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Ampl/Cbtl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.06	Pk	32.5	-23.3	60.26	-	-	74	-13.74	330	102	V
2	* 2.484	54.29	Pk	32.5	-23.3	63.49	-	-	74	-10.51	330	102	V
3	* 2.484	37.35	RMS	32.5	-23.3	46.55	54	-7.45	-	-	330	102	V
4	* 2.484	37.86	RMS	32.5	-23.3	47.06	54	-6.94	-	-	330	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

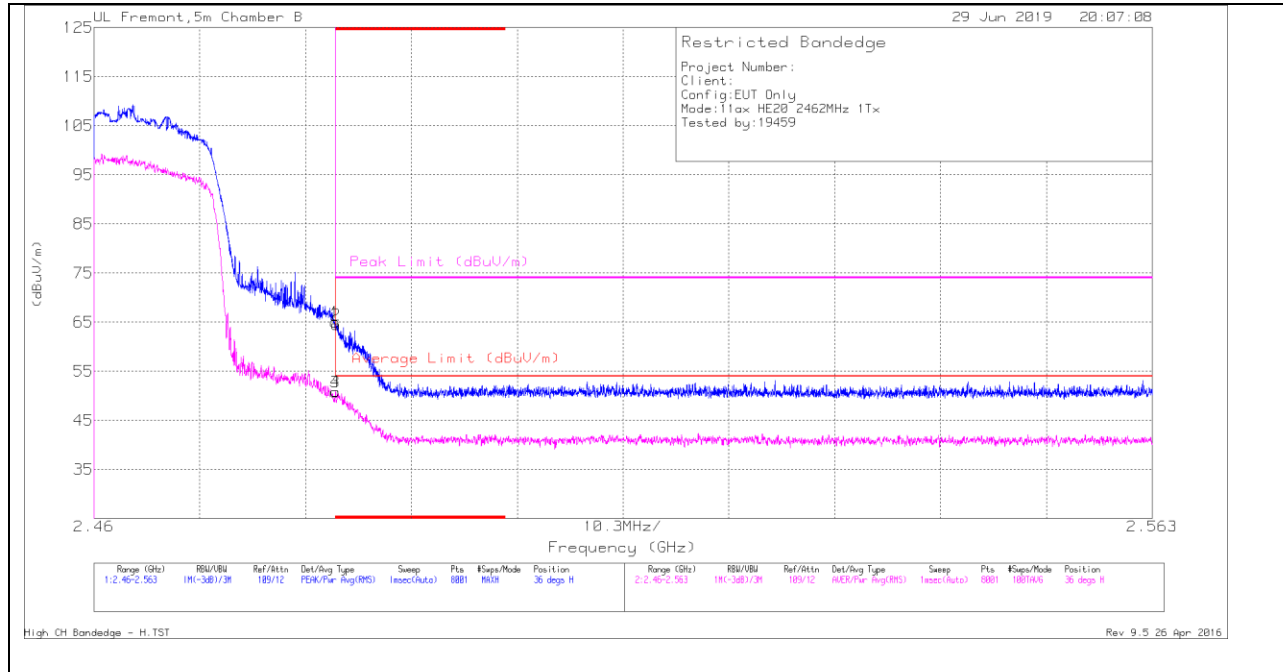


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.58	Pk	32.3	-18.9	64.98	-	-	74	-9.02	36	141	H
2	* 2.484	51.06	Pk	32.3	-18.9	64.46	-	-	74	-9.54	36	141	H
3	* 2.484	37.41	RMS	32.3	-18.9	50.81	54	-3.19	-	-	36	141	H
4	* 2.484	37.47	RMS	32.3	-18.9	50.87	54	-3.13	-	-	36	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

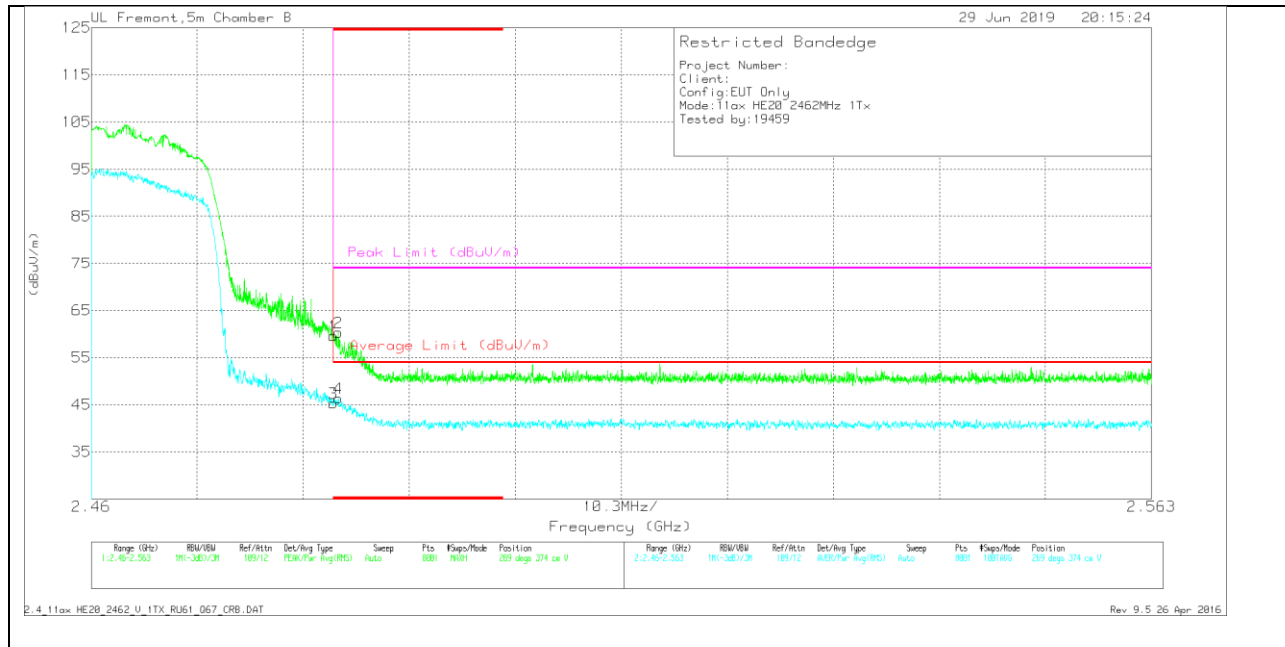

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.28	Pk	32.3	-18.9	59.68	-	-	74	-14.32	269	374	V
2	* 2.484	46.96	Pk	32.3	-18.9	60.36	-	-	74	-13.64	269	374	V
3	* 2.484	31.91	RMS	32.3	-18.9	45.31	54	-8.69	-	-	269	374	V
4	* 2.484	32.97	RMS	32.3	-18.9	46.37	54	-7.63	-	-	269	374	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

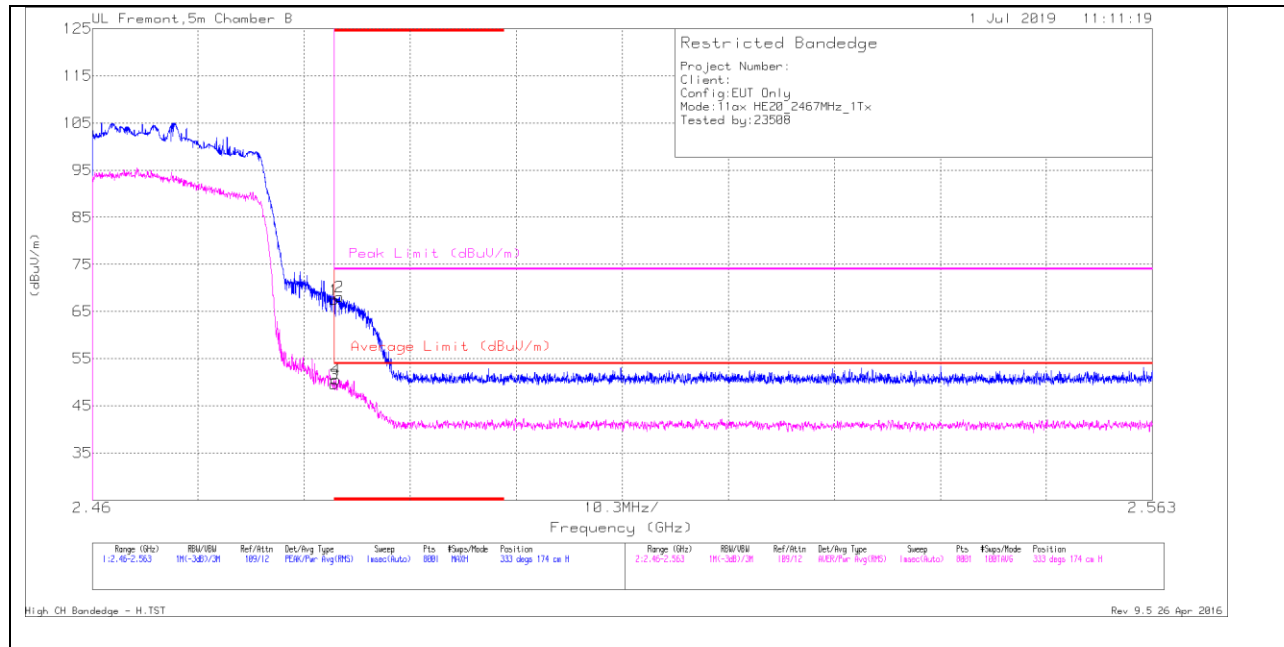


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.15	Pk	32.3	-18.9	67.55	-	-	74	-6.45	333	174	H
2	* 2.484	54.76	Pk	32.3	-18.9	68.16	-	-	74	-5.84	333	174	H
3	* 2.484	36.17	RMS	32.3	-18.9	49.57	54	-4.43	-	-	333	174	H
4	* 2.484	37.19	RMS	32.3	-18.9	50.59	54	-3.41	-	-	333	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

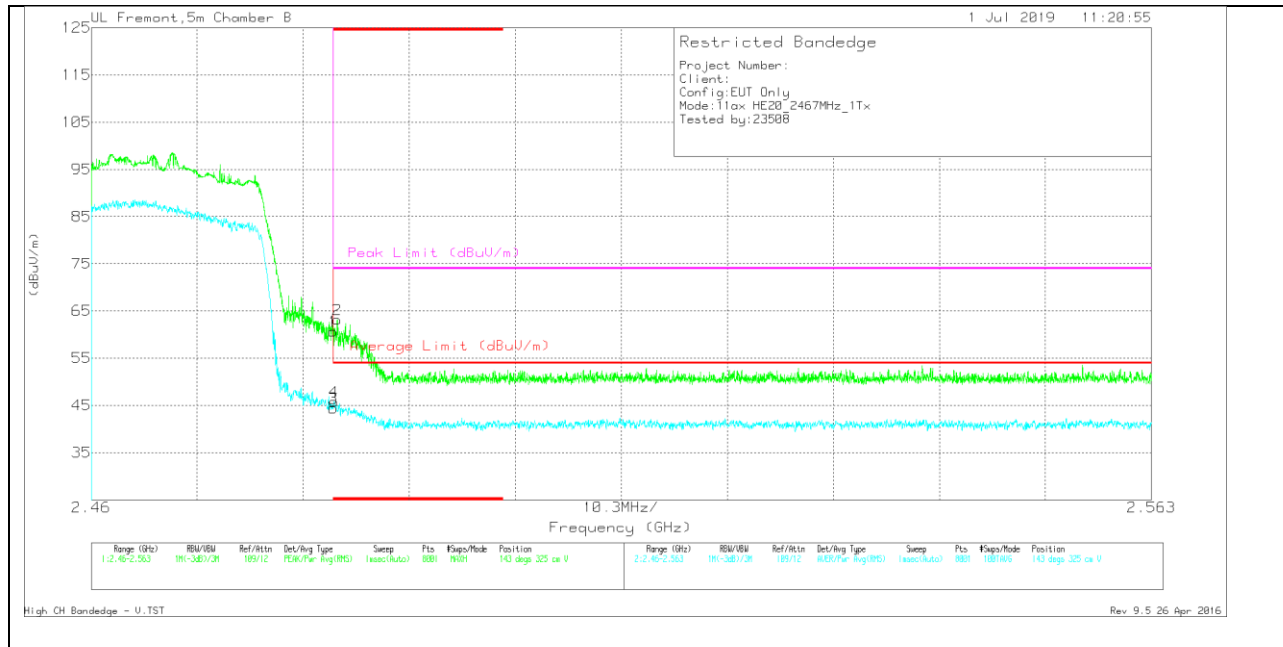

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.29	Pk	32.3	-18.9	60.69	-	-	74	-13.31	143	325	V
2	* 2.484	49.78	Pk	32.3	-18.9	63.18	-	-	74	-10.82	143	325	V
3	* 2.484	31.06	RMS	32.3	-18.9	44.46	54	-9.54	-	-	143	325	V
4	* 2.484	32.41	RMS	32.3	-18.9	45.81	54	-8.19	-	-	143	325	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

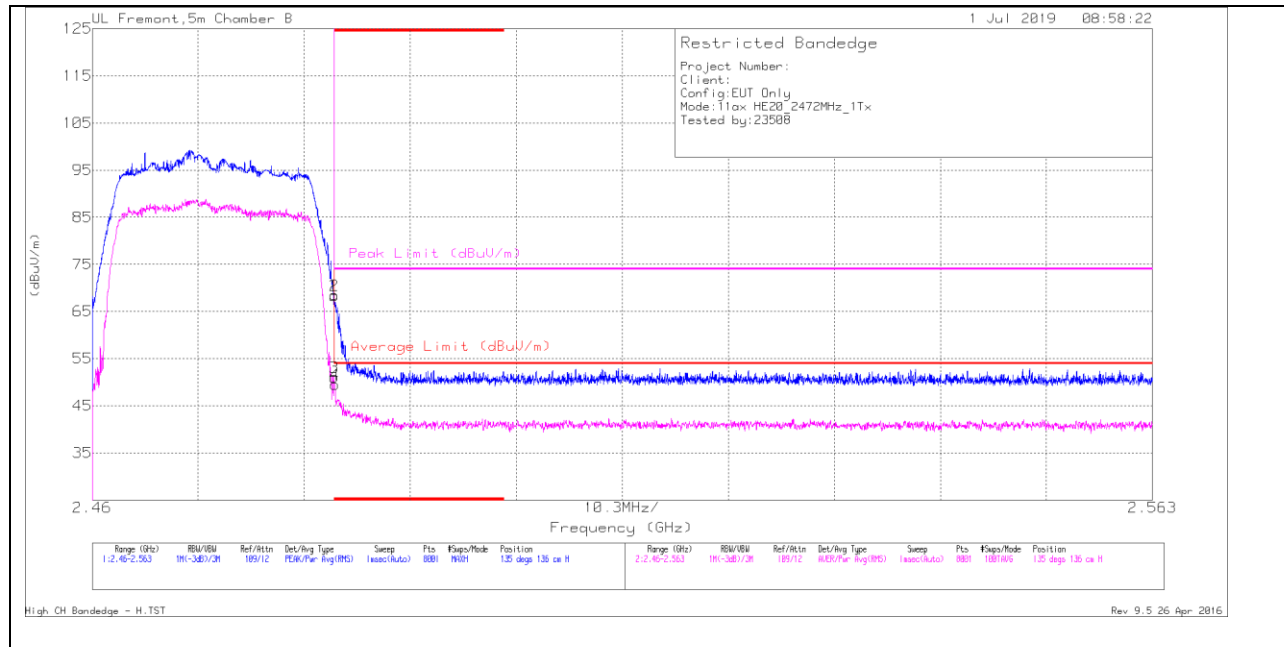


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.97	Pk	32.3	-18.9	68.37	-	-	74	-5.63	135	136	H
2	* 2.484	55.11	Pk	32.3	-18.9	68.51	-	-	74	-5.49	135	136	H
3	* 2.484	37.72	RMS	32.3	-18.9	51.12	54	-2.88	-	-	135	136	H
4	* 2.484	36.13	RMS	32.3	-18.9	49.53	54	-4.47	-	-	135	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

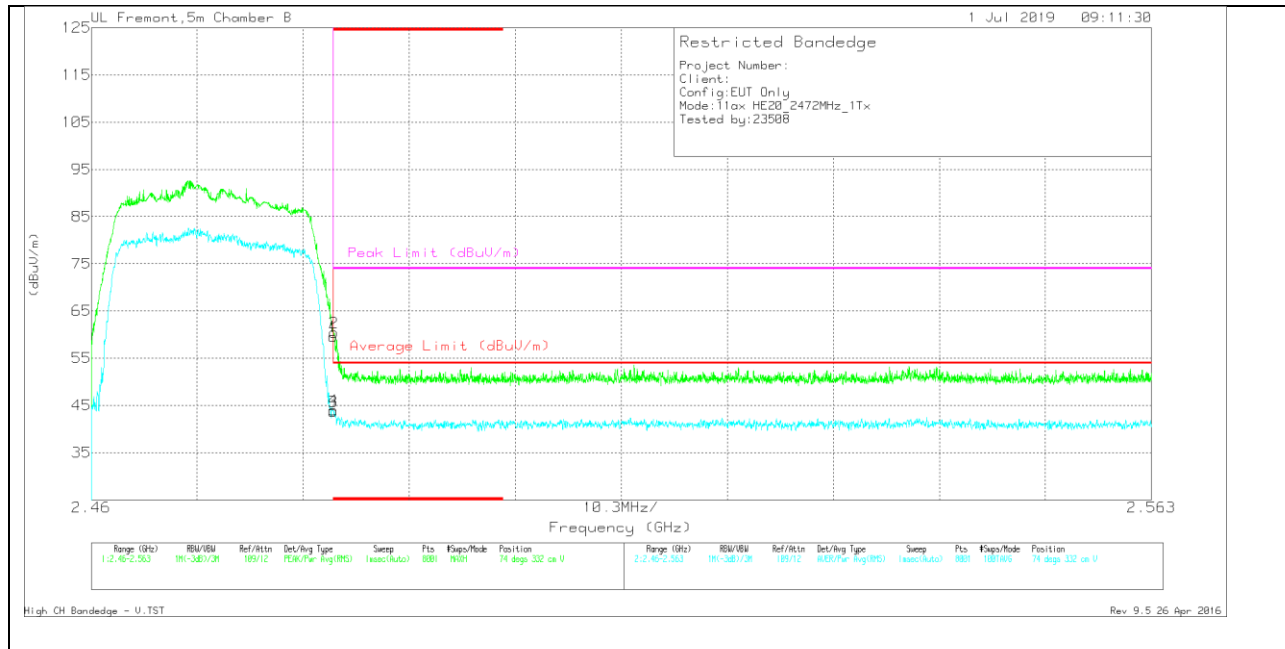

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.21	Pk	32.3	-18.9	59.61	-	-	74	-14.39	74	332	V
2	* 2.484	47.05	Pk	32.3	-18.9	60.45	-	-	74	-13.55	74	332	V
3	* 2.484	30.39	RMS	32.3	-18.9	43.79	54	-10.21	-	-	74	332	V
4	* 2.484	30.67	RMS	32.3	-18.9	44.07	54	-9.93	-	-	74	332	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 3 LEGACY SISO MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

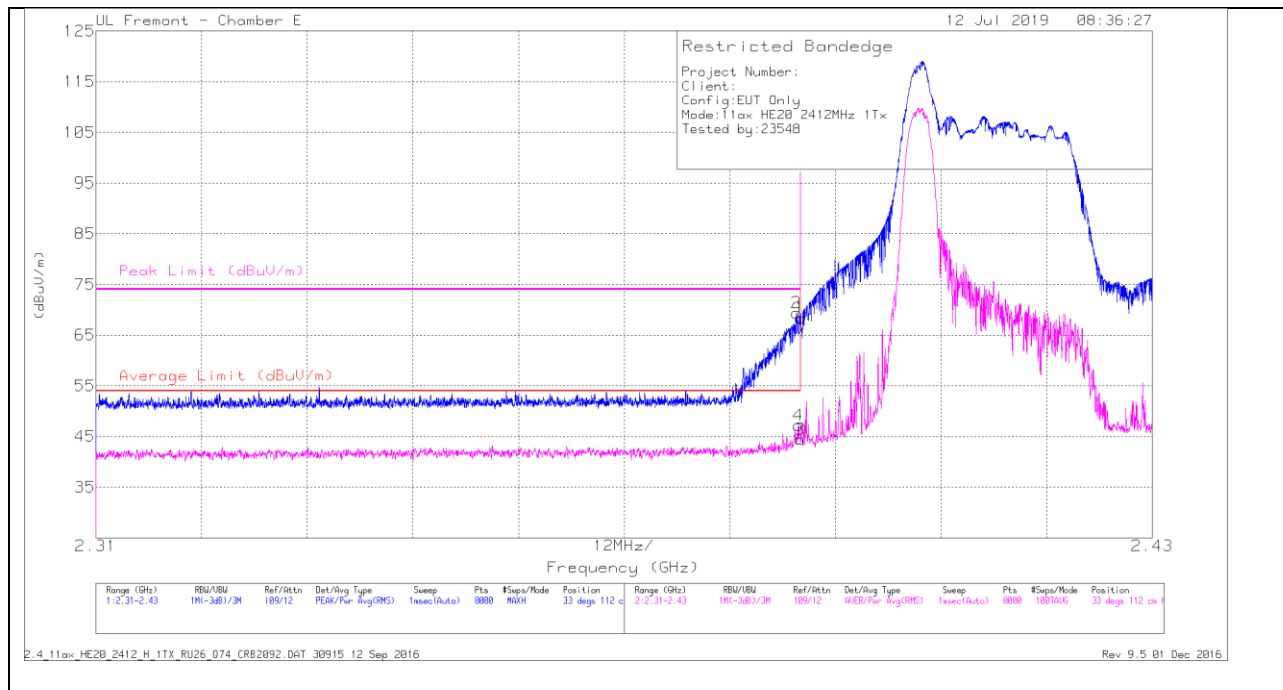


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/CbI/FitriP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.38	Pk	32.3	-18.3	68.38	-	-	74	-5.62	33	112	H
2	* 2.39	55.38	Pk	32.3	-18.3	69.38	-	-	74	-4.62	33	112	H
3	* 2.39	30.42	RMS	32.3	-18.3	44.42	54	-9.58	-	-	33	112	H
4	* 2.39	33.17	RMS	32.3	-18.3	47.17	54	-6.83	-	-	33	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

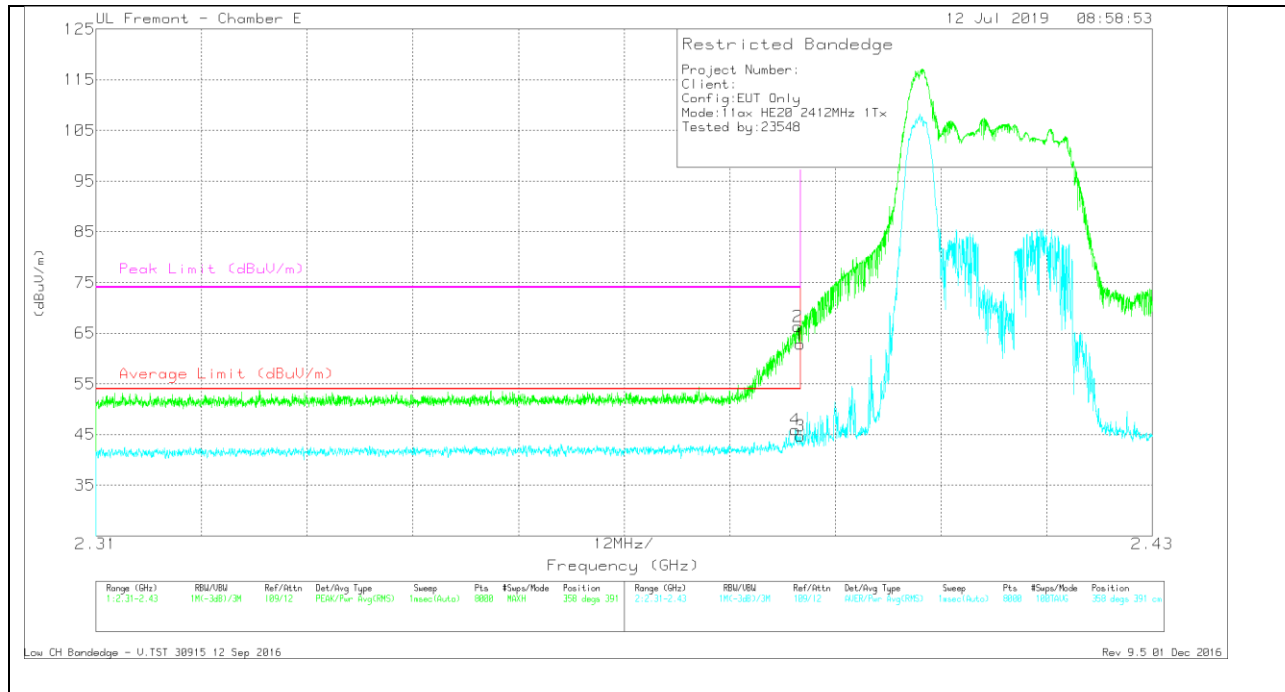

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.88	Pk	32.3	-18.3	62.88	-	-	74	-11.12	358	391	V
2	* 2.39	52.36	Pk	32.3	-18.3	66.36	-	-	74	-7.64	358	391	V
3	* 2.39	30.76	RMS	32.3	-18.3	44.76	54	-9.24	-	-	358	391	V
4	* 2.389	31.97	RMS	32.3	-18.3	45.97	54	-8.03	-	-	358	391	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

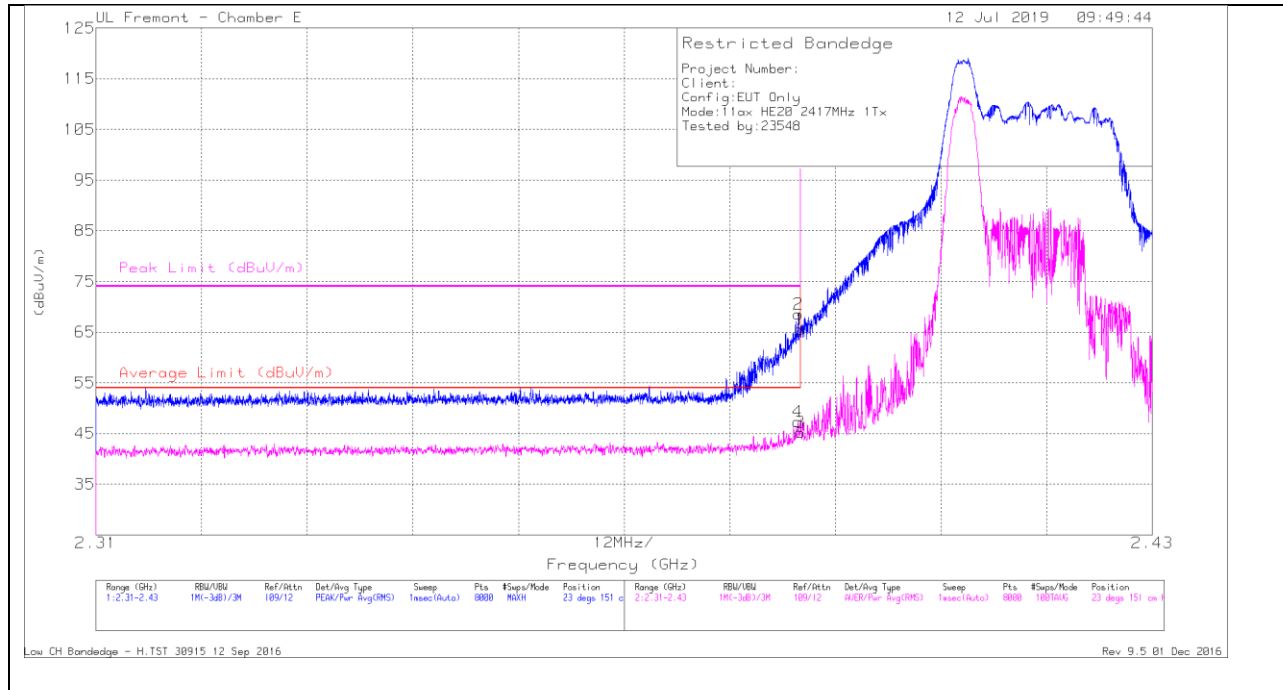


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.51	Pk	32.3	-18.3	65.51	-	-	74	-8.49	23	151	H
2	* 2.39	54.56	Pk	32.3	-18.3	68.56	-	-	74	-5.44	23	151	H
3	* 2.39	31.23	RMS	32.3	-18.3	45.23	54	-8.77	-	-	23	151	H
4	* 2.39	33.28	RMS	32.3	-18.3	47.28	54	-6.72	-	-	23	151	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

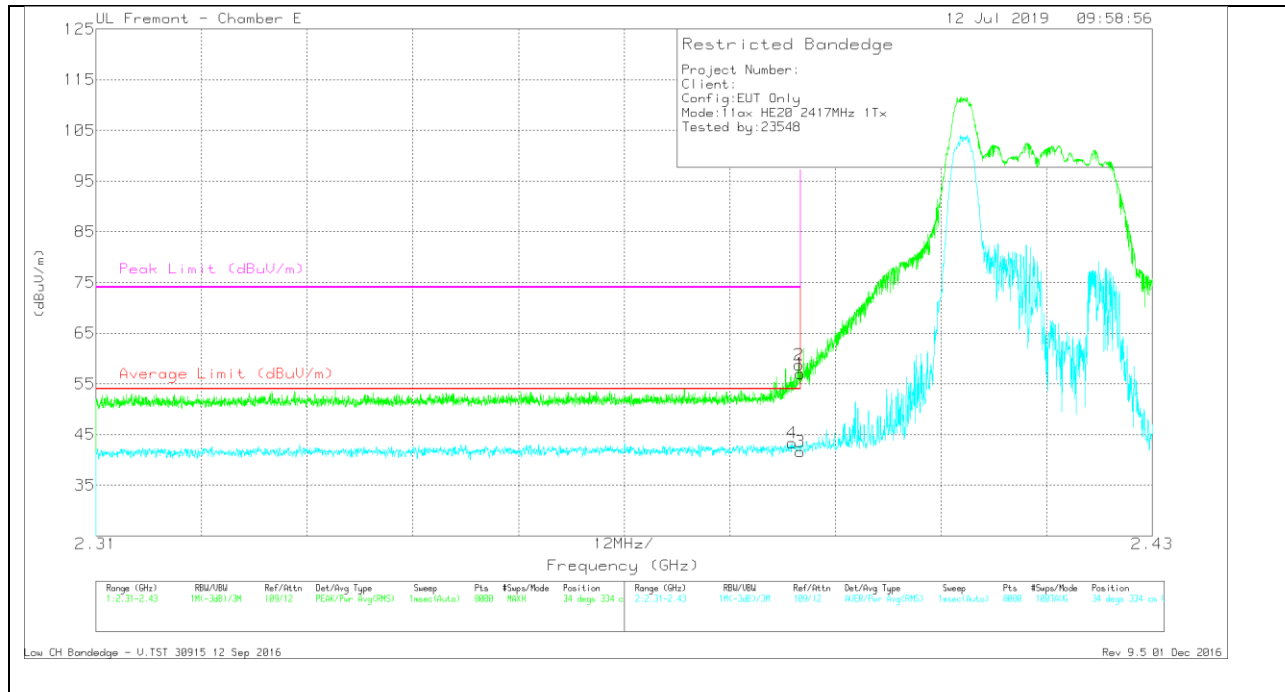

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.94	Pk	32.3	-18.3	56.94	-	-	74	-17.06	34	334	V
2	* 2.39	44.79	Pk	32.3	-18.3	58.79	-	-	74	-15.21	34	334	V
3	* 2.39	27.64	RMS	32.3	-18.3	41.64	54	-12.36	-	-	34	334	V
4	* 2.389	29.31	RMS	32.3	-18.3	43.31	54	-10.69	-	-	34	334	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

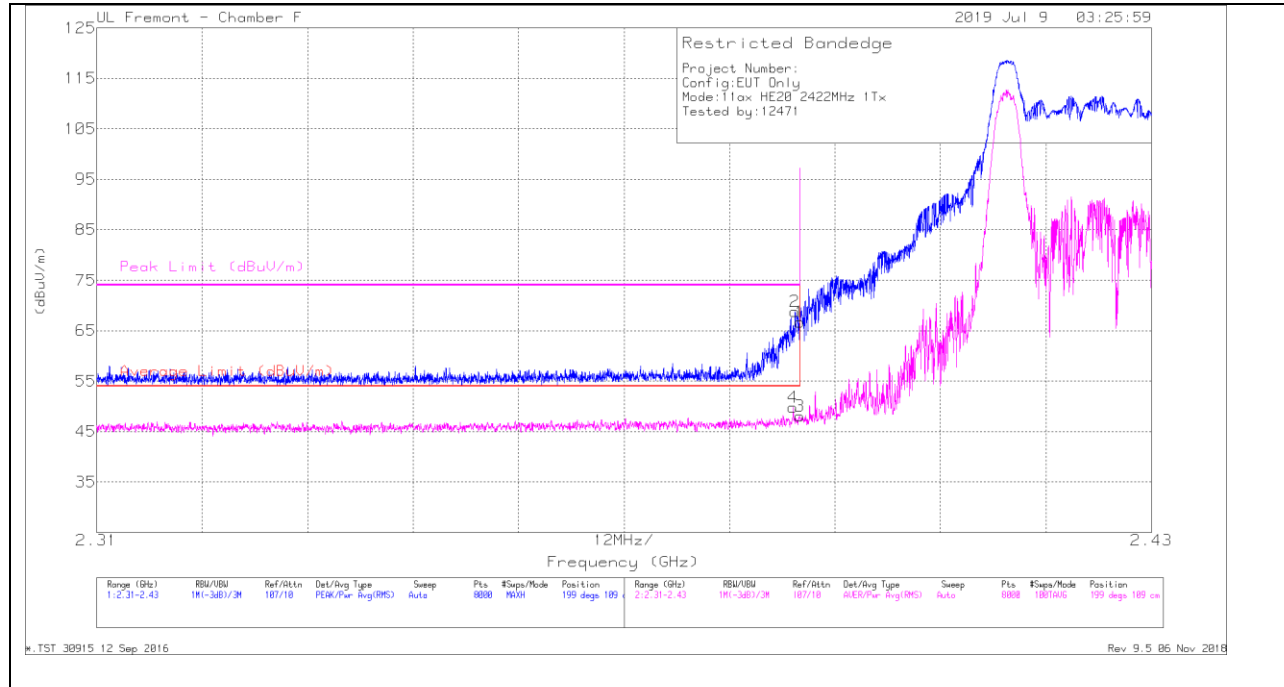


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.14	Pk	32	-14.5	66.64	-	-	74	-7.36	199	109	H
2	* 2.389	51.27	Pk	32	-14.5	68.77	-	-	74	-5.23	199	109	H
3	* 2.39	30.51	RMS	32	-14.5	48.01	54	-5.99	-	-	199	109	H
4	* 2.389	32.25	RMS	32	-14.5	49.75	54	-4.25	-	-	199	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

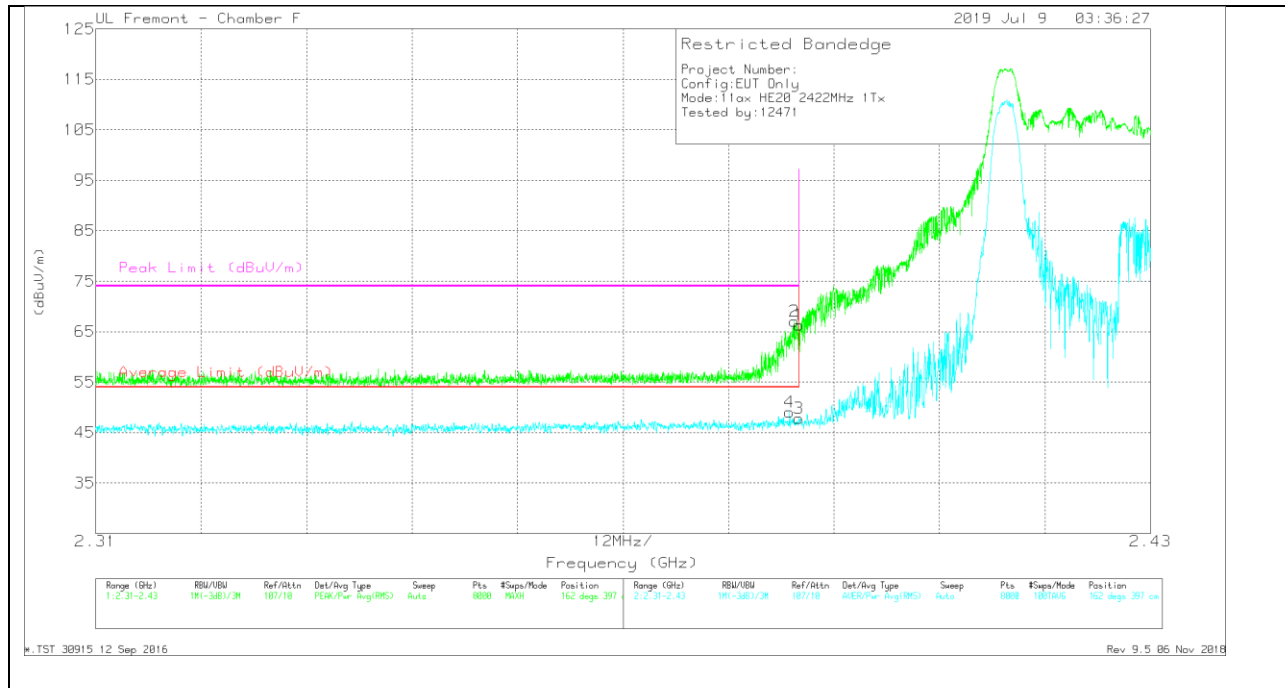

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.8	Pk	32	-14.5	66.3	-	-	74	-7.7	162	397	V
2	* 2.39	49.6	Pk	32	-14.5	67.1	-	-	74	-6.9	162	397	V
3	* 2.39	30.35	RMS	32	-14.5	47.85	54	-6.15	-	-	162	397	V
4	* 2.389	31.58	RMS	32	-14.5	49.08	54	-4.92	-	-	162	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 3 LEGACY SISO MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

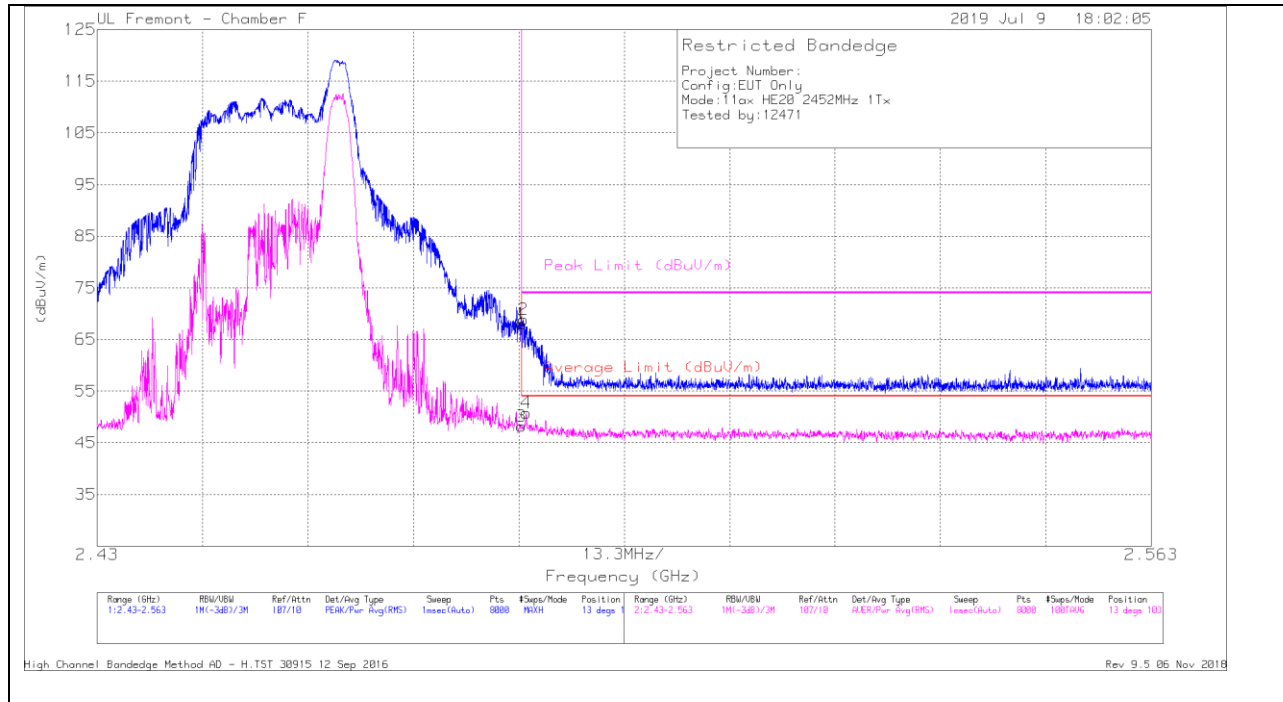


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.33	Pk	32.4	-14.7	68.03	-	-	74	-5.97	13	103	H
2	* 2.484	51.15	Pk	32.4	-14.7	68.85	-	-	74	-5.15	13	103	H
3	* 2.484	30.49	RMS	32.4	-14.7	48.19	54	-5.81	-	-	13	103	H
4	* 2.484	33.07	RMS	32.4	-14.7	50.77	54	-3.23	-	-	13	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

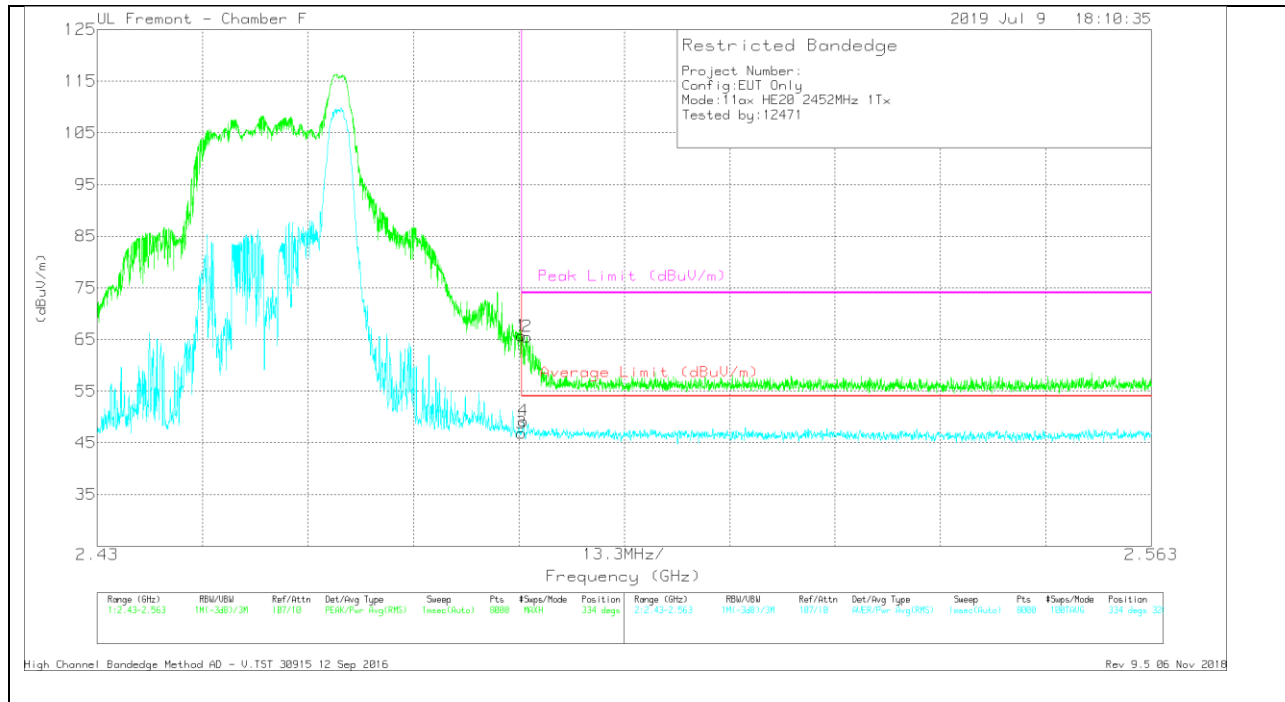

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48	Pk	32.4	-14.7	65.7	-	-	74	-8.3	334	320	V
2	* 2.484	47.85	Pk	32.4	-14.7	65.55	-	-	74	-8.45	334	320	V
3	* 2.484	29.18	RMS	32.4	-14.7	46.88	54	-7.12	-	-	334	320	V
4	* 2.484	31.54	RMS	32.4	-14.7	49.24	54	-4.76	-	-	334	320	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

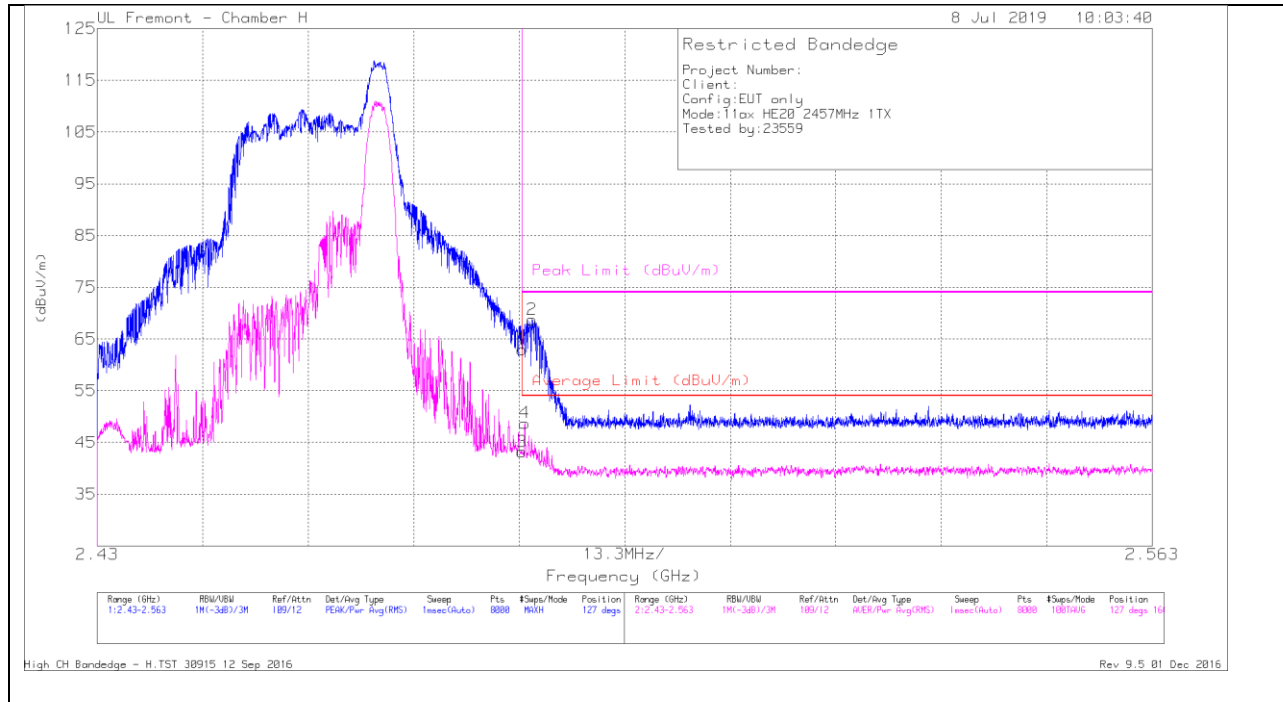

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52	Pk	32.5	-21.5	63	-	-	74	-11	127	160	H
2	* 2.485	57.72	Pk	32.5	-21.5	68.72	-	-	74	-5.28	127	160	H
3	* 2.484	32.21	RMS	32.5	-21.5	43.21	54	-10.79	-	-	127	160	H
4	* 2.484	37.75	RMS	32.5	-21.5	48.75	54	-5.25	-	-	127	160	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

VERTICAL RESULT

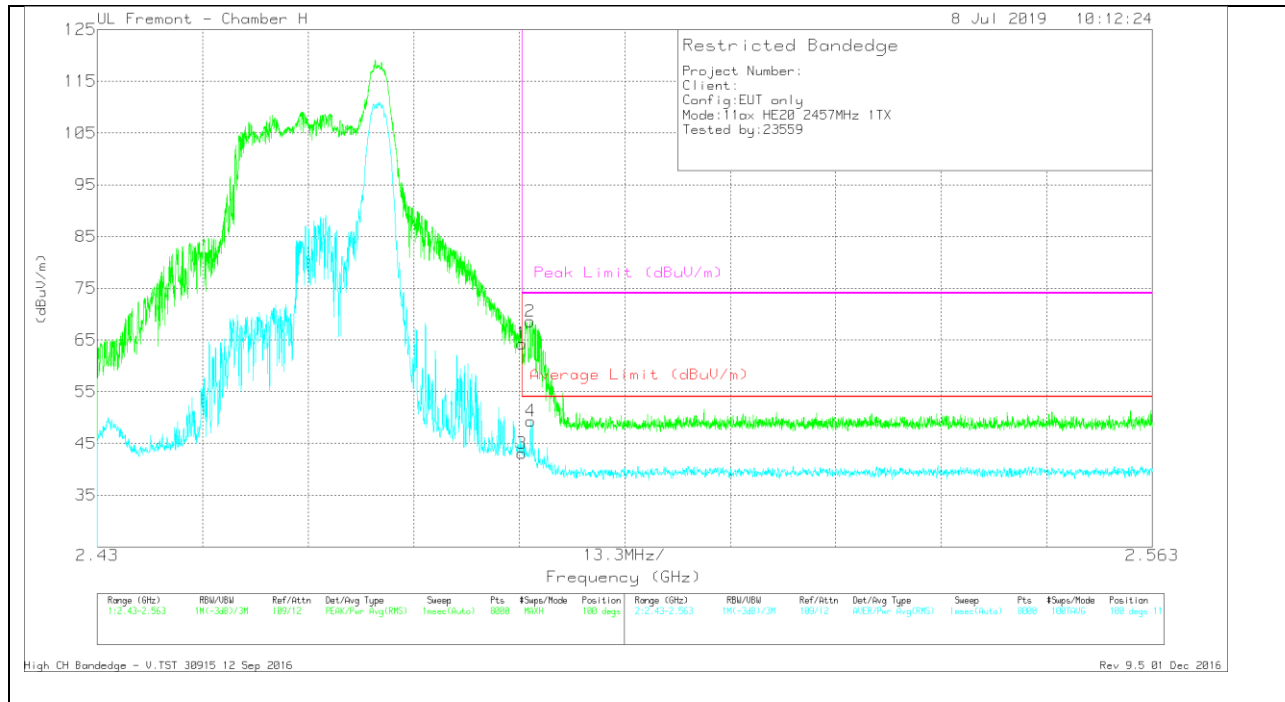

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/FiltriP ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.33	Pk	32.5	-21.5	64.33	-	-	74	-9.67	100	111	V
2	* 2.485	57.61	Pk	32.5	-21.5	68.61	-	-	74	-5.39	100	111	V
3	* 2.484	32.07	RMS	32.5	-21.5	43.07	54	-10.93	-	-	100	111	V
4	* 2.485	38.31	RMS	32.5	-21.5	49.31	54	-4.69	-	-	100	111	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

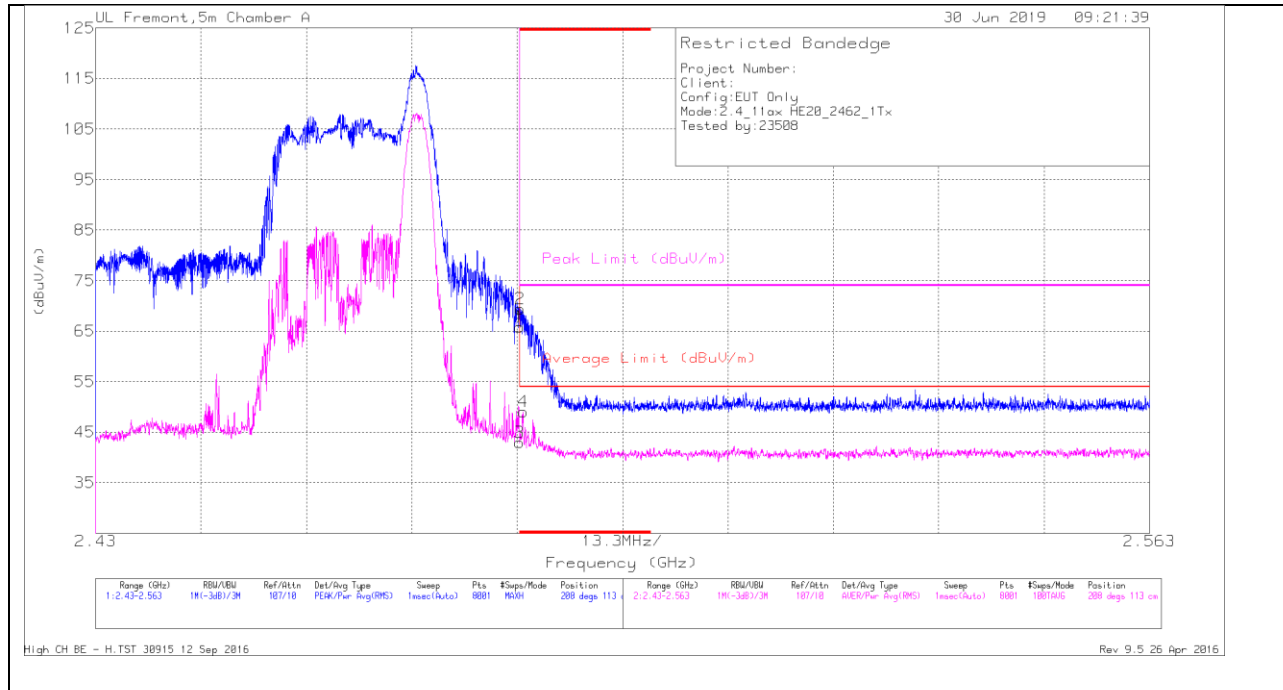


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.3	Pk	32.6	-22.1	65.8	-	-	74	-8.2	208	113	H
2	* 2.484	58.87	Pk	32.6	-22.1	69.37	-	-	74	-4.63	208	113	H
3	* 2.484	32.52	RMS	32.6	-22.1	43.02	54	-10.98	-	-	208	113	H
4	* 2.484	38.55	RMS	32.6	-22.1	49.05	54	-4.95	-	-	208	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

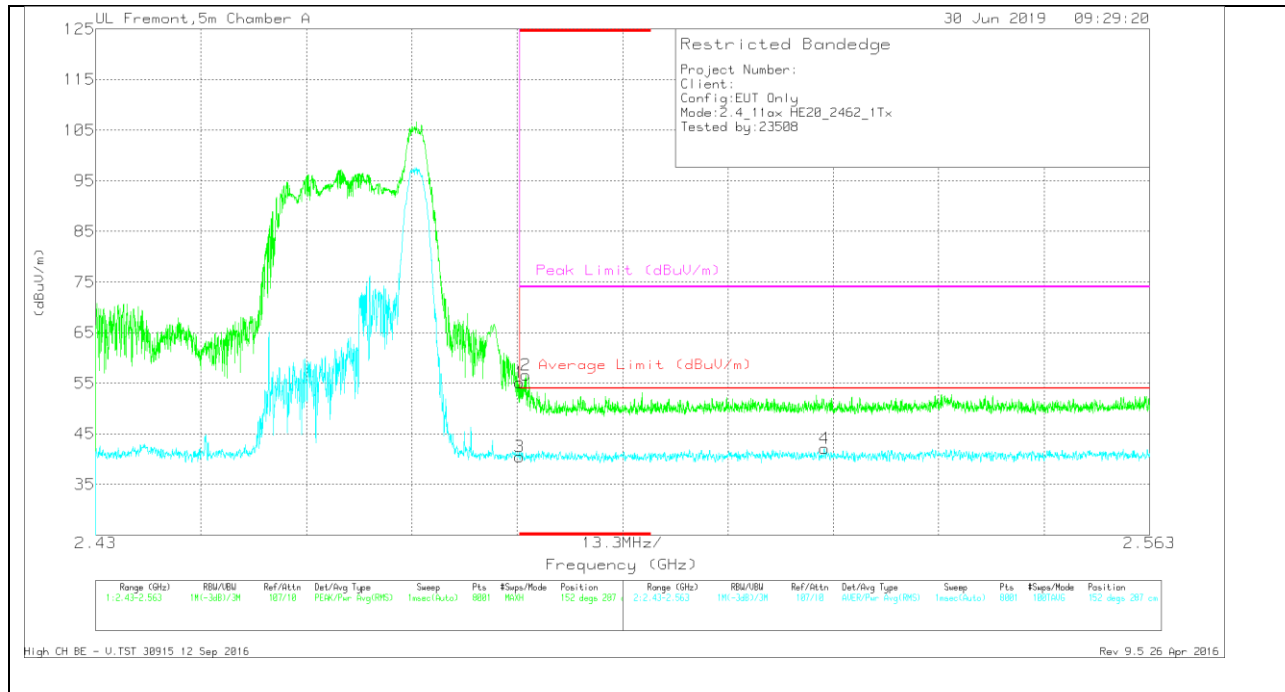

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.63	Pk	32.6	-22.1	55.13	-	-	74	-18.87	152	287	V
2	* 2.484	46.15	Pk	32.6	-22.1	56.65	-	-	74	-17.35	152	287	V
3	* 2.484	30.02	RMS	32.6	-22.1	40.52	54	-13.48	-	-	152	287	V
4	2.522	31.36	RMS	32.6	-21.9	42.06	54	-11.94	-	-	152	287	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

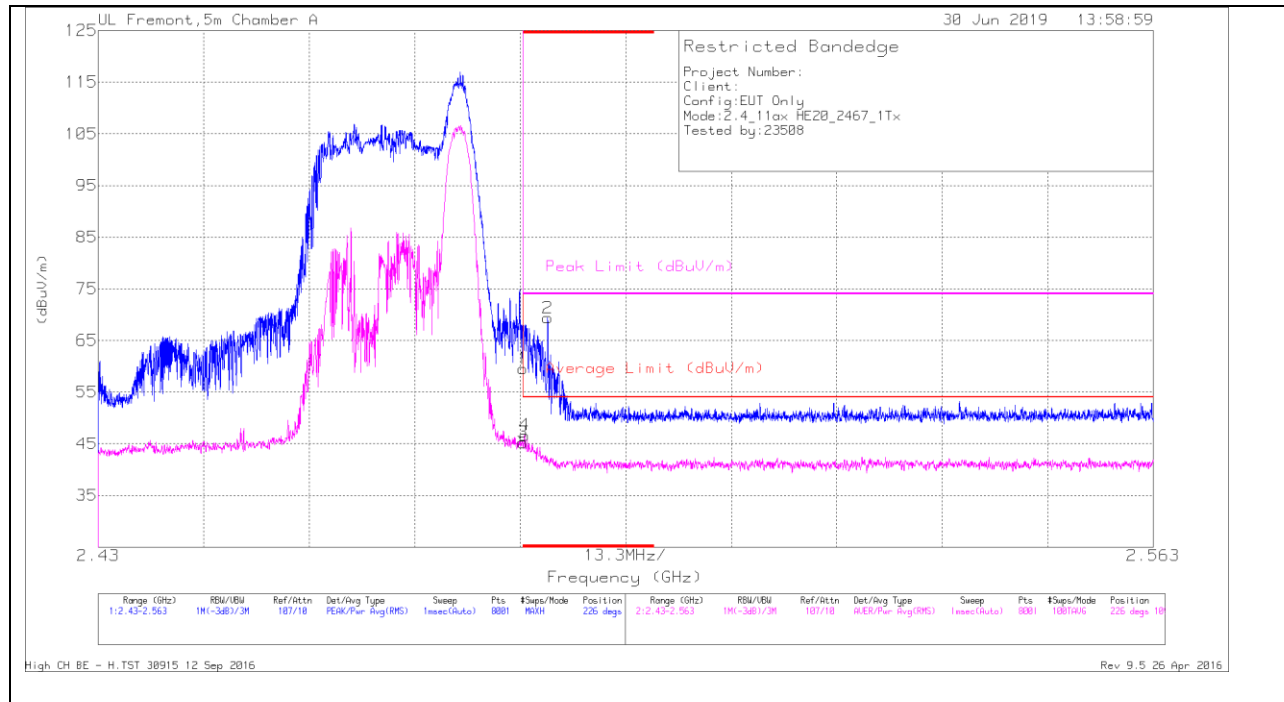


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.04	Pk	32.6	-22.1	59.54	-	-	74	-14.46	226	109	H
3	* 2.484	34.74	RMS	32.6	-22.1	45.24	54	-8.76	-	-	226	109	H
4	* 2.484	36.18	RMS	32.6	-22.1	46.68	54	-7.32	-	-	226	109	H
2	* 2.487	58.86	Pk	32.6	-22.1	69.36	-	-	74	-4.64	226	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

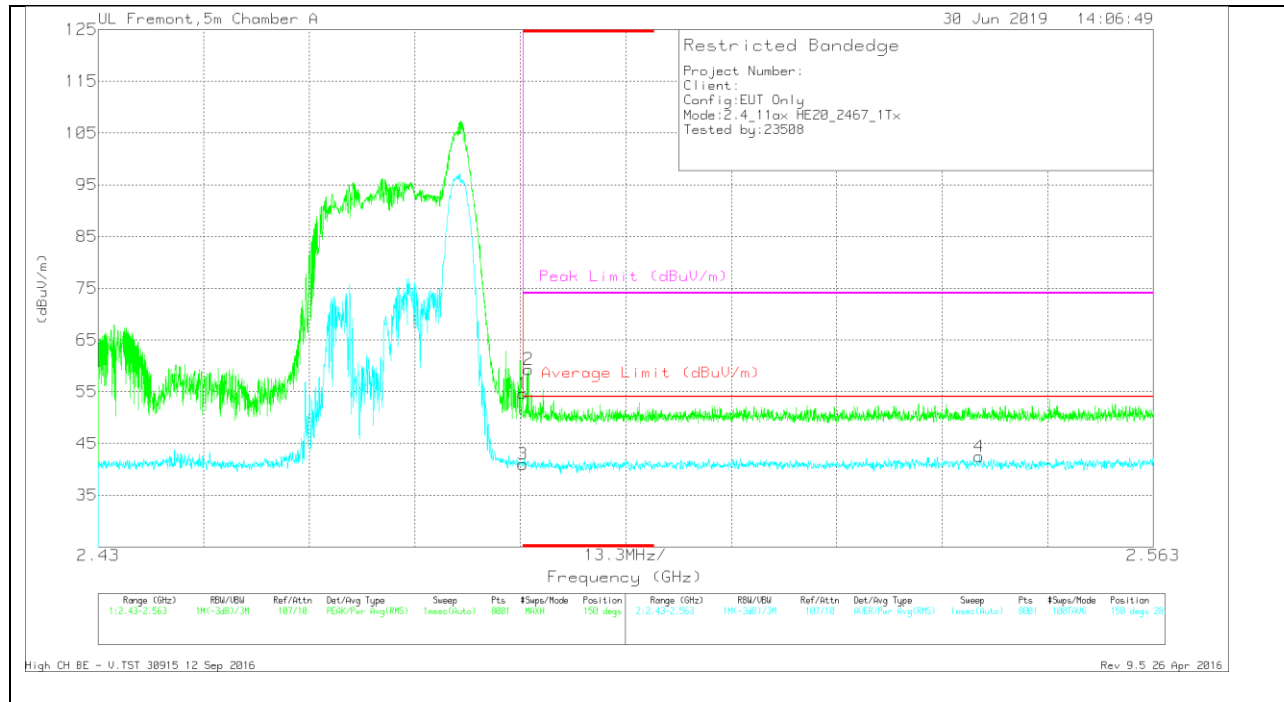

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.15	Pk	32.6	-22.1	54.65	-	-	74	-19.35	150	282	V
2	* 2.484	48.79	Pk	32.6	-22.1	59.29	-	-	74	-14.71	150	282	V
3	* 2.484	30.48	RMS	32.6	-22.1	40.98	54	-13.02	-	-	150	282	V
4	2.541	31.68	RMS	32.6	-21.8	42.48	54	-11.52	-	-	150	282	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

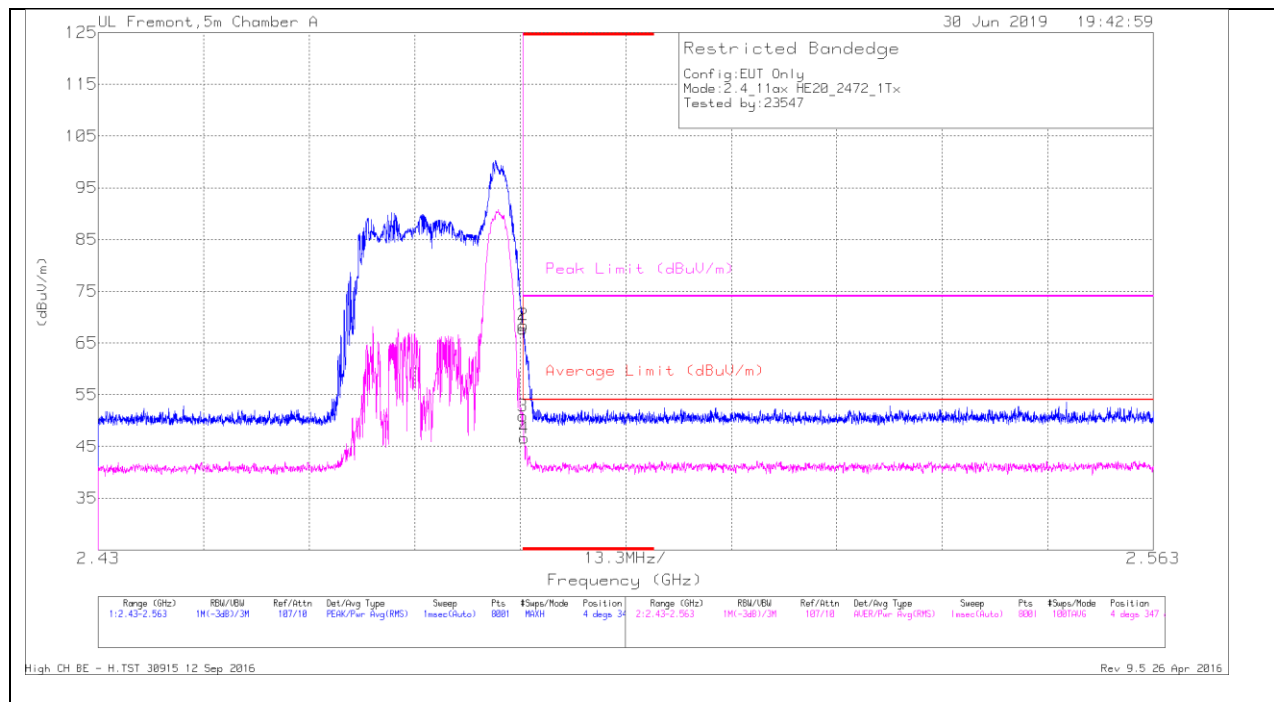


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.18	Pk	32.6	-22.1	67.68	-	-	74	-6.32	4	347	H
2	* 2.484	57.97	Pk	32.6	-22.1	68.47	-	-	74	-5.53	4	347	H
3	* 2.484	40.39	RMS	32.6	-22.1	50.89	54	-3.11	-	-	4	347	H
4	* 2.484	36.12	RMS	32.6	-22.1	46.62	54	-7.38	-	-	4	347	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

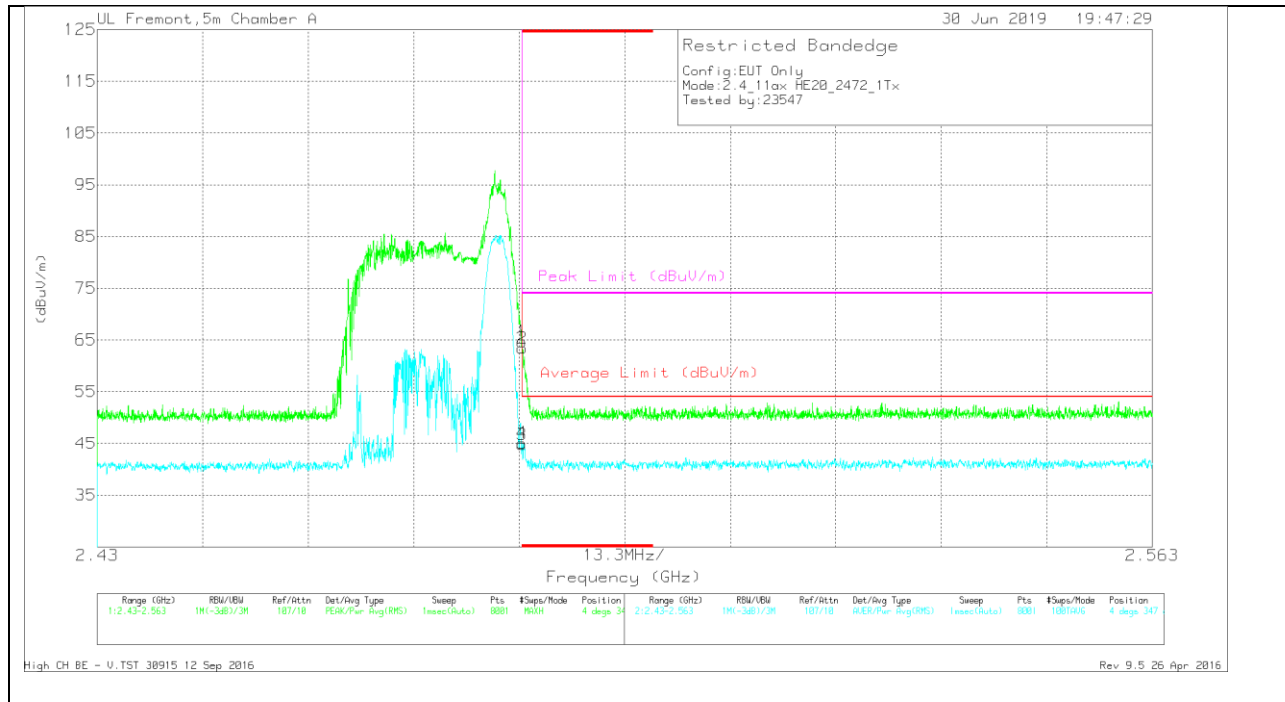

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Ampl/Cbll/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.2	Pk	32.6	-22.1	64.7	-	-	74	-9.3	4	347	V
2	* 2.484	52.9	Pk	32.6	-22.1	63.4	-	-	74	-10.6	4	347	V
3	* 2.484	34.27	RMS	32.6	-22.1	44.77	54	-9.23	-	-	4	347	V
4	* 2.484	34.55	RMS	32.6	-22.1	45.05	54	-8.95	-	-	4	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Antenna 3, LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

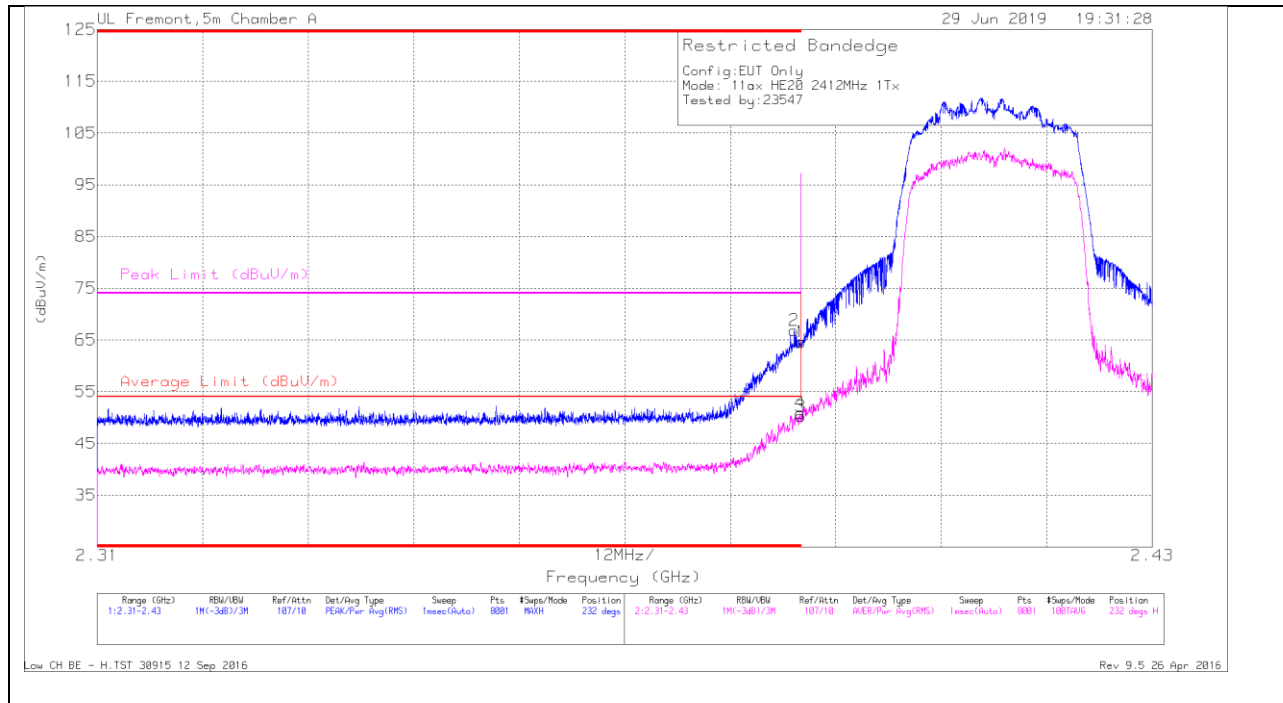


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	56.93	Pk	32.2	-22.3	66.83	-	-	74	-7.17	232	102	H
1	* 2.39	54.68	Pk	32.2	-22.3	64.58	-	-	74	-9.42	232	102	H
3	* 2.39	40.37	RMS	32.2	-22.3	50.27	54	-3.73	-	-	232	102	H
4	* 2.39	40.93	RMS	32.2	-22.3	50.83	54	-3.17	-	-	232	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

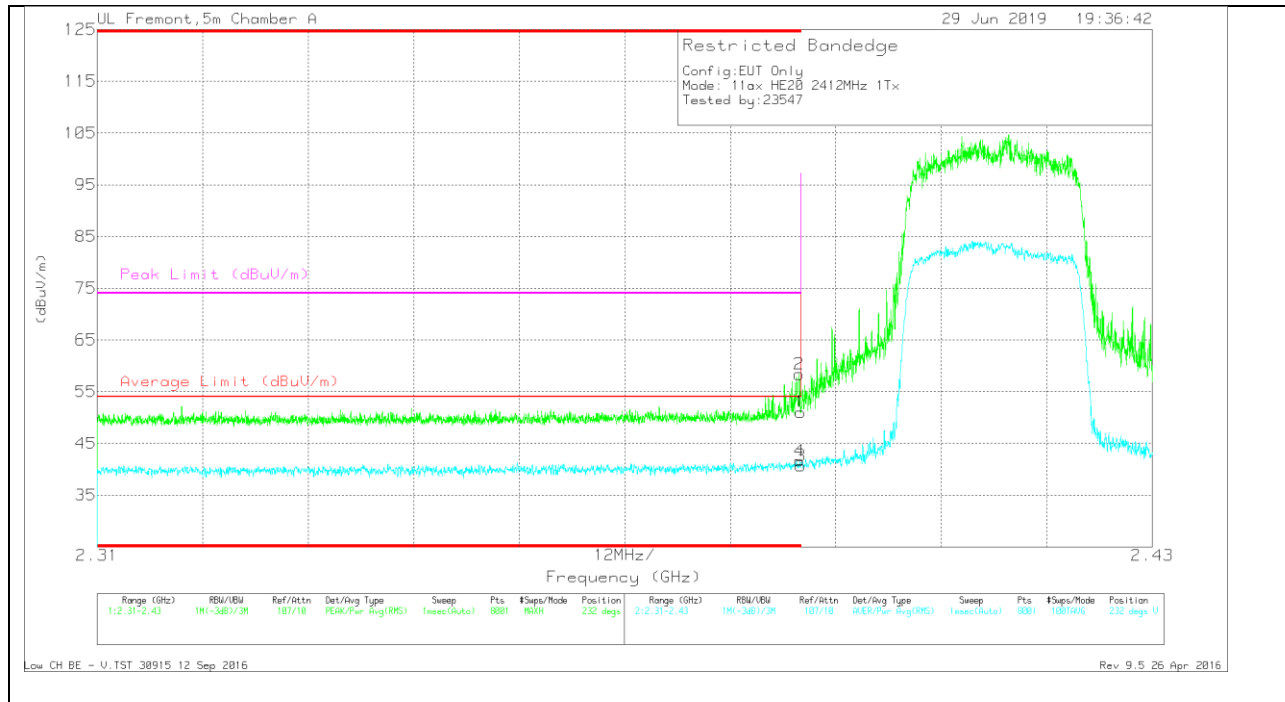

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.16	Pk	32.2	-22.3	51.06	-	-	74	-22.94	232	102	V
2	* 2.39	48.48	Pk	32.2	-22.3	58.38	-	-	74	-15.62	232	102	V
3	* 2.39	30.77	RMS	32.2	-22.3	40.67	54	-13.33	-	-	232	102	V
4	* 2.39	31.71	RMS	32.2	-22.3	41.61	54	-12.39	-	-	232	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

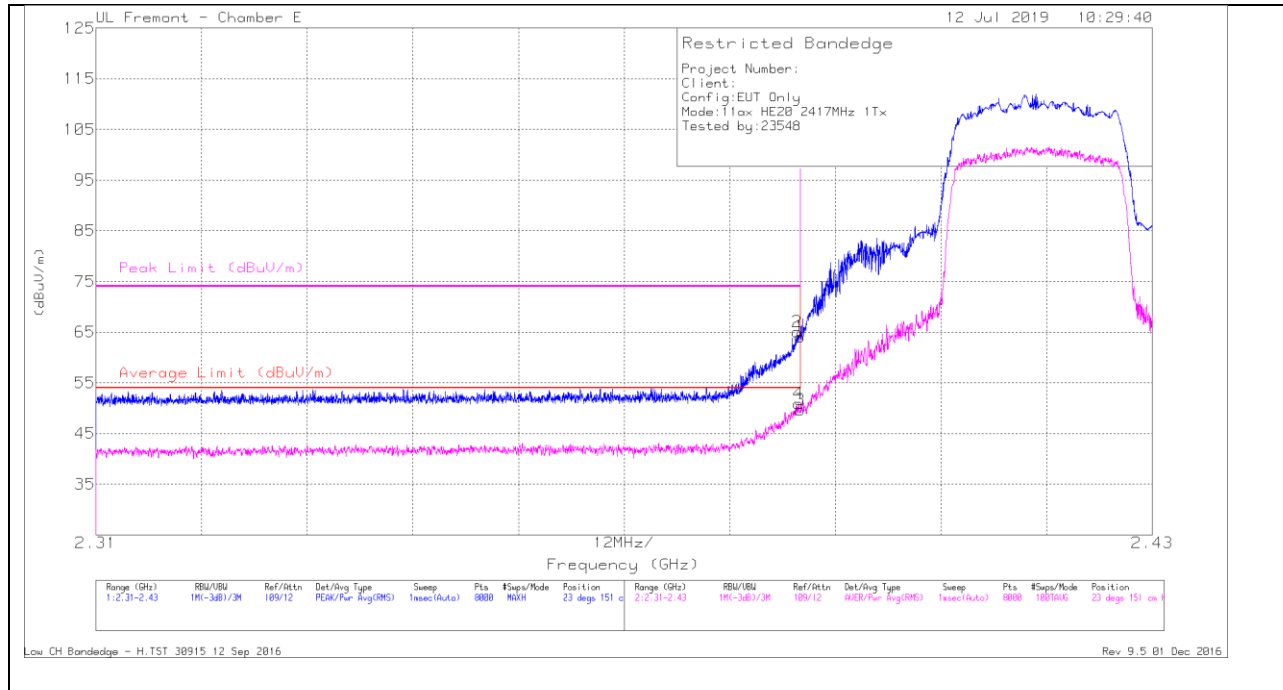


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.03	Pk	32.3	-18.3	64.03	-	-	74	-9.97	23	151	H
2	* 2.39	51.05	Pk	32.3	-18.3	65.05	-	-	74	-8.95	23	151	H
3	* 2.39	35.62	RMS	32.3	-18.3	49.62	54	-4.38	-	-	23	151	H
4	* 2.39	36.9	RMS	32.3	-18.3	50.9	54	-3.1	-	-	23	151	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

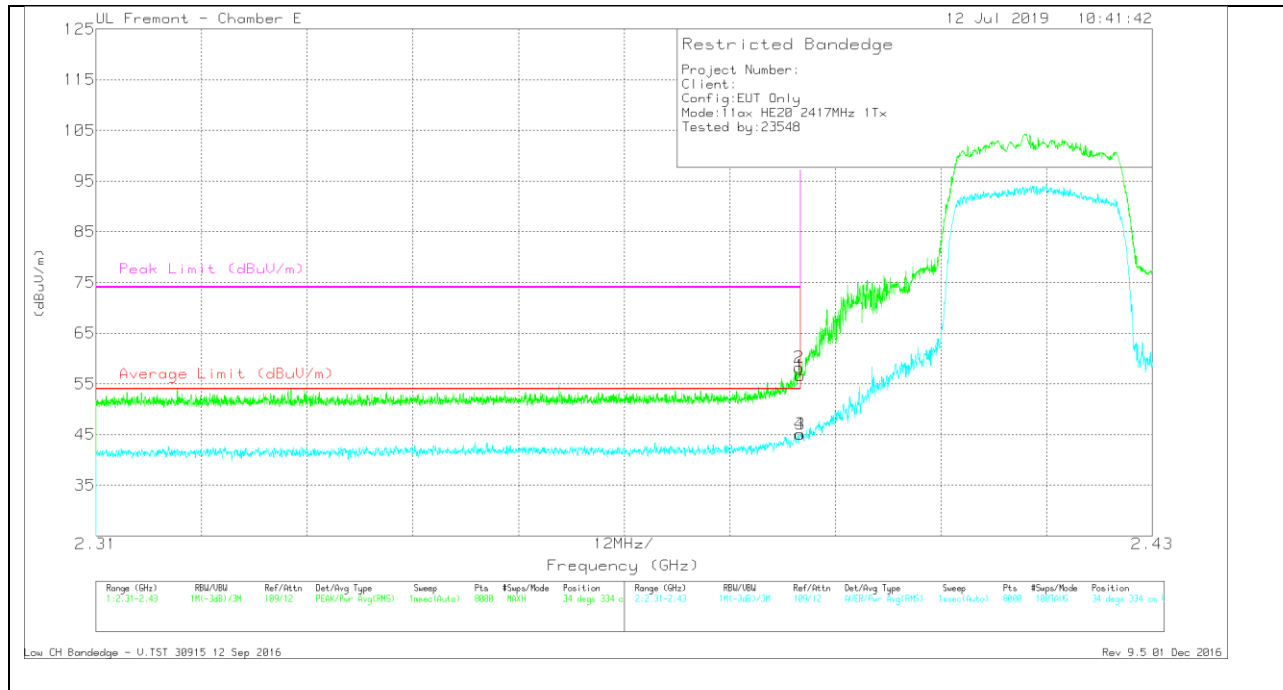

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.61	Pk	32.3	-18.3	56.61	-	-	74	-17.39	34	334	V
2	* 2.39	44.27	Pk	32.3	-18.3	58.27	-	-	74	-15.73	34	334	V
3	* 2.39	31.1	RMS	32.3	-18.3	45.1	54	-8.9	-	-	34	334	V
4	* 2.39	31.1	RMS	32.3	-18.3	45.1	54	-8.9	-	-	34	334	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

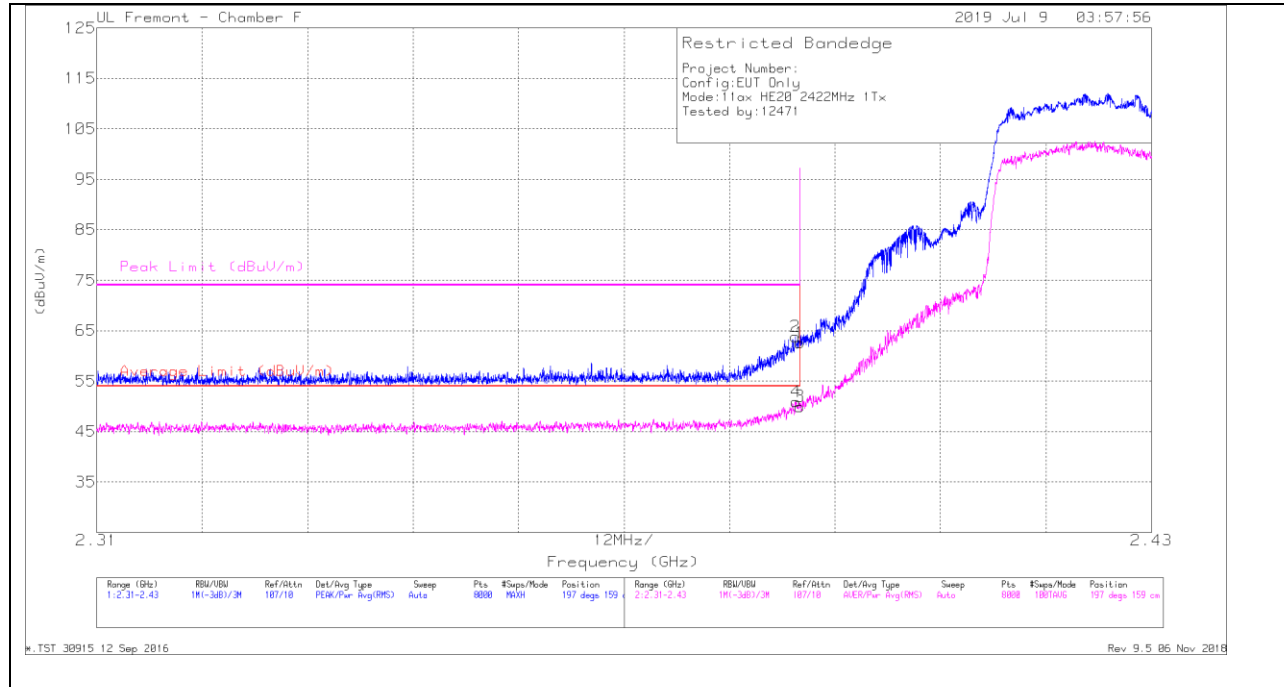


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.09	Pk	32	-14.5	62.59	-	-	74	-11.41	197	159	H
2	* 2.389	46.36	Pk	32	-14.5	63.86	-	-	74	-10.14	197	159	H
3	* 2.39	32.48	RMS	32	-14.5	49.98	54	-4.02	-	-	197	159	H
4	* 2.39	33.45	RMS	32	-14.5	50.95	54	-3.05	-	-	197	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

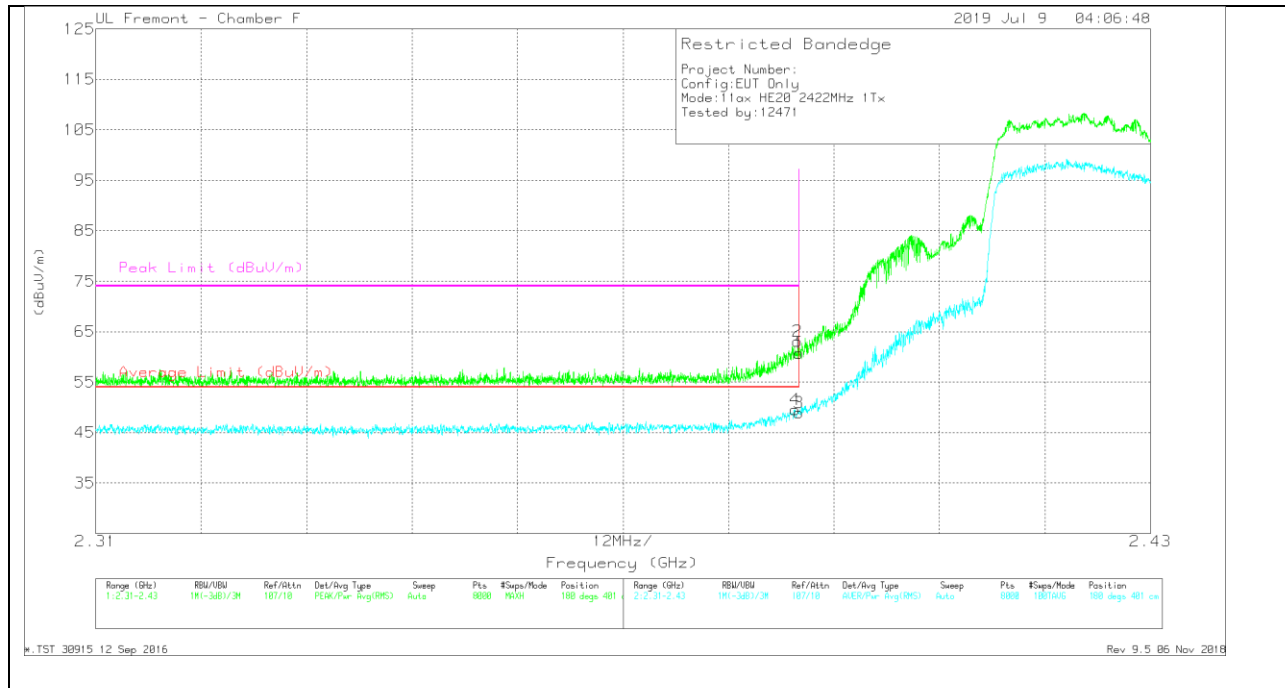

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Ampl/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.17	Pk	32	-14.5	60.67	-	-	74	-13.33	180	401	V
2	* 2.39	45.54	Pk	32	-14.5	63.04	-	-	74	-10.96	180	401	V
3	* 2.39	31.47	RMS	32	-14.5	48.97	54	-5.03	-	-	180	401	V
4	* 2.39	31.99	RMS	32	-14.5	49.49	54	-4.51	-	-	180	401	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

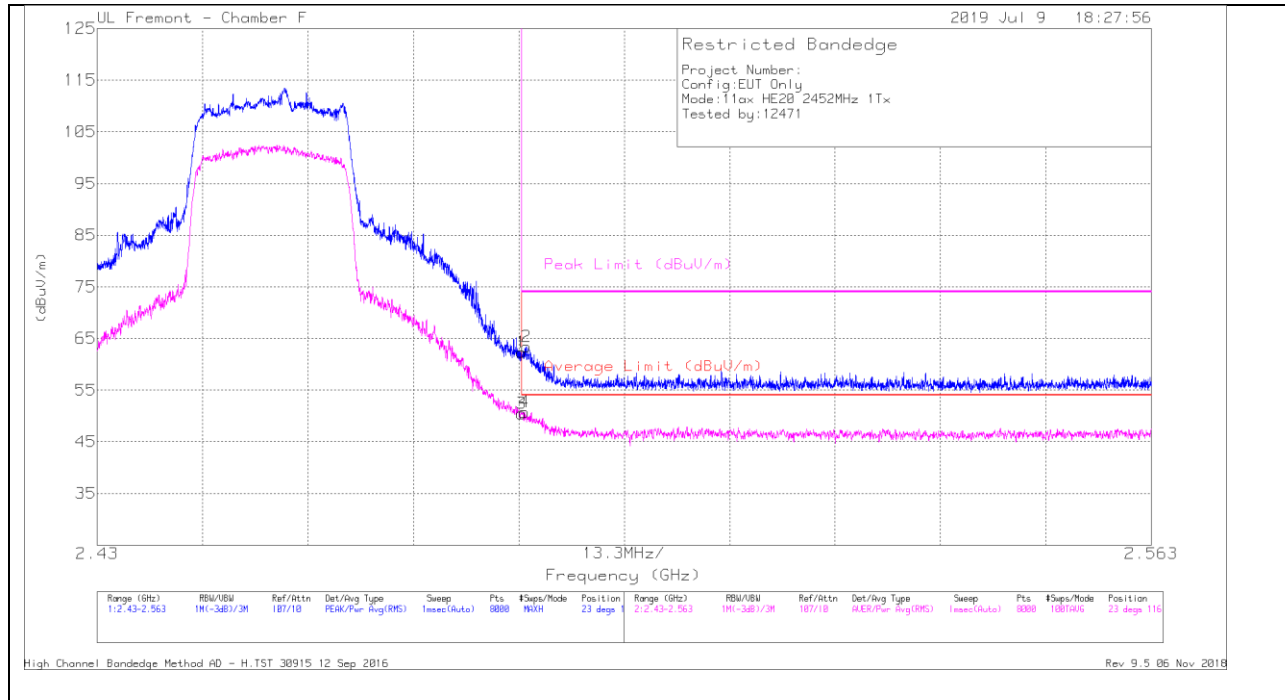

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.62	Pk	32.4	-14.7	62.32	-	-	74	-11.68	23	116	H
2	* 2.484	45.69	Pk	32.4	-14.7	63.39	-	-	74	-10.61	23	116	H
3	* 2.484	32.77	RMS	32.4	-14.7	50.47	54	-3.53	-	-	23	116	H
4	* 2.484	33.02	RMS	32.4	-14.7	50.72	54	-3.28	-	-	23	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection