


1TX Antenna 6 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

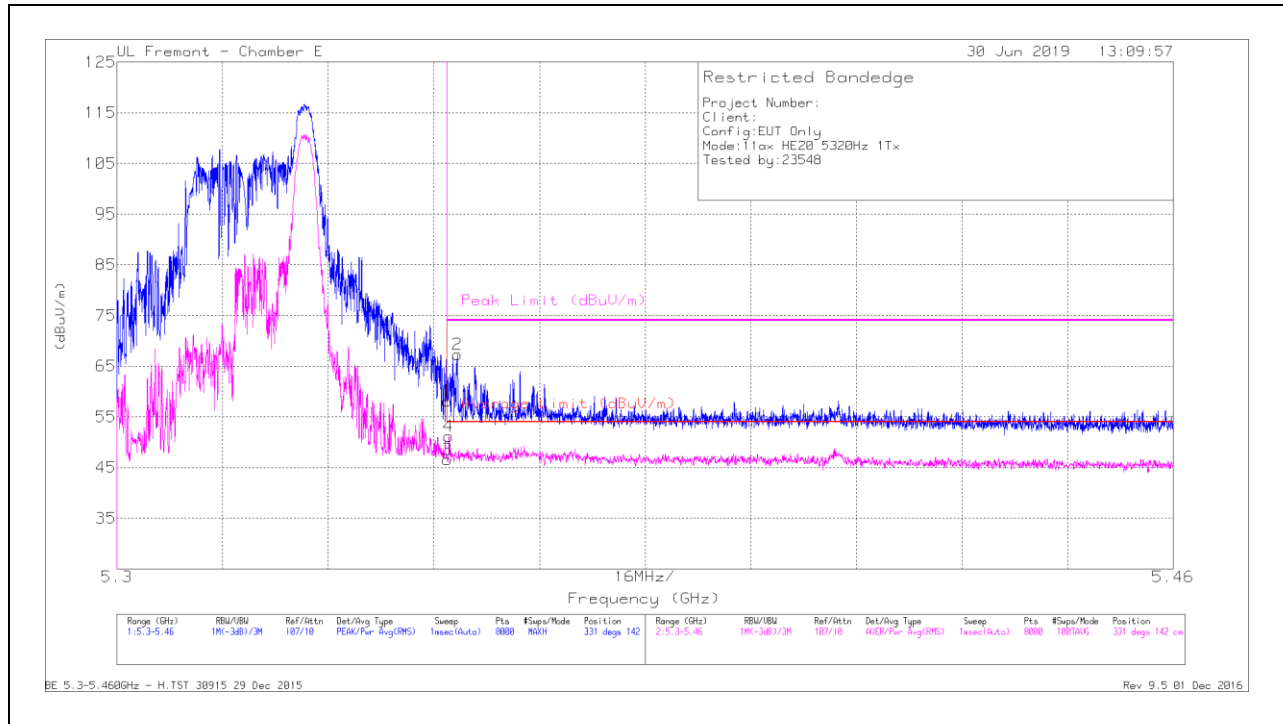


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.02	Pk	34.5	-21.4	58.12	-	-	74	-15.88	331	142	H
2	* 5.352	54.17	PK	34.5	-21.4	67.27	-	-	74	-6.73	331	142	H
3	* 5.35	33.42	RMS	34.5	-21.4	46.52	54	-7.48	-	-	331	142	H
4	* 5.35	38.1	RMS	34.5	-21.4	51.2	54	-2.8	-	-	331	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

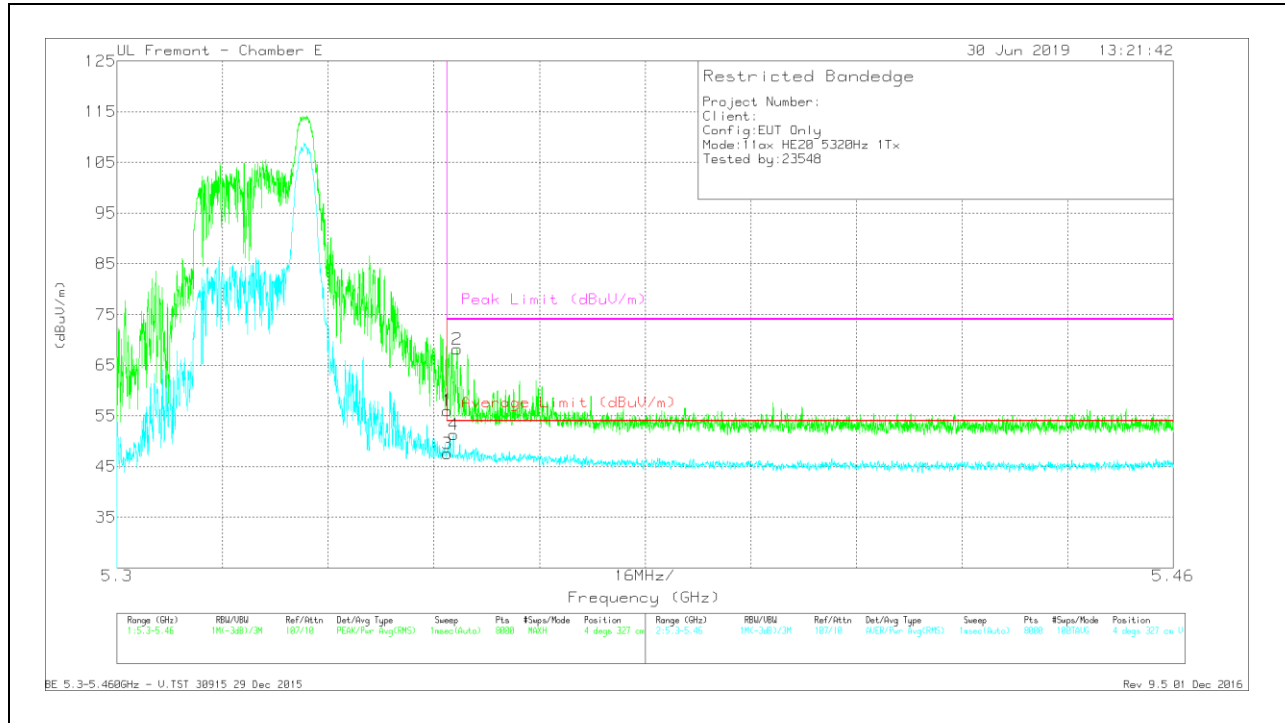

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.89	Pk	34.5	-21.4	55.99	-	-	74	-18.01	4	327	V
2	* 5.352	55.04	Pk	34.5	-21.4	68.14	-	-	74	-5.96	4	327	V
3	* 5.35	34.47	RMS	34.5	-21.4	47.57	54	-6.43	-	-	4	327	V
4	* 5.351	38.14	RMS	34.5	-21.4	51.24	54	-2.76	-	-	4	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

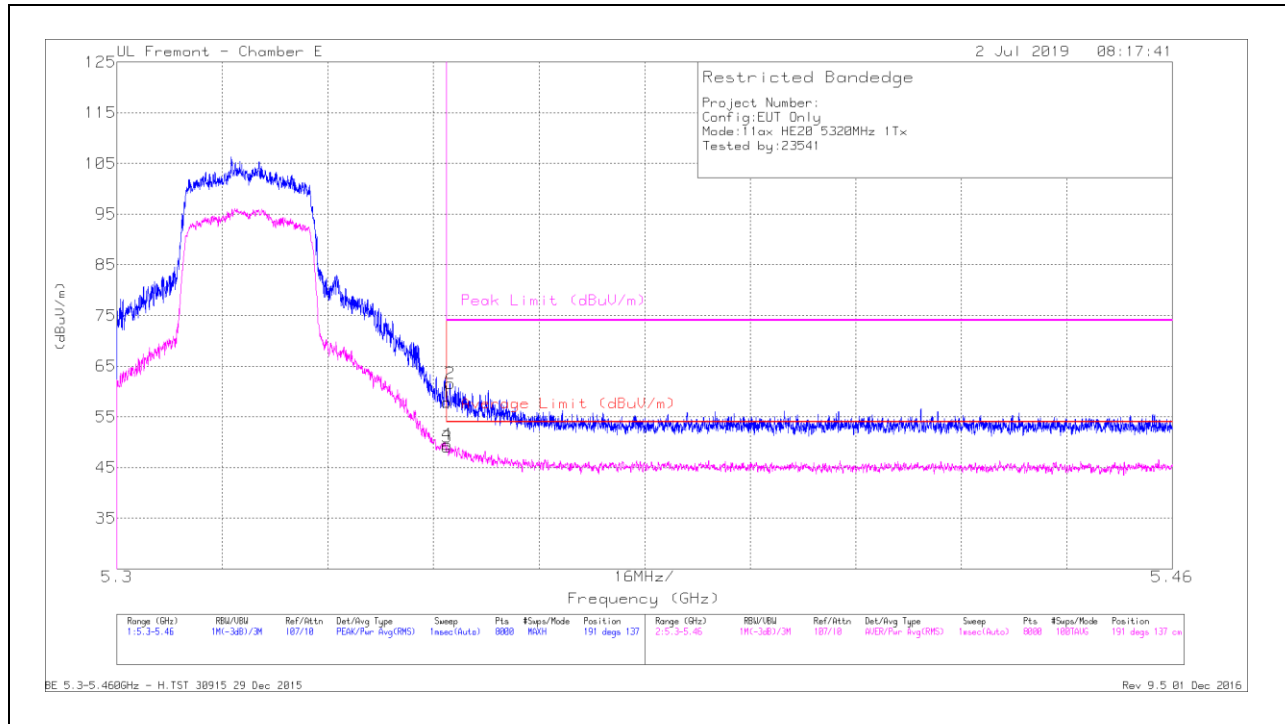


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.76	Pk	34.5	-21.4	57.86	-	-	74	-16.14	191	137	H
2	* 5.35	48.49	PK	34.5	-21.4	61.59	-	-	74	-12.41	191	137	H
3	* 5.35	35.96	RMS	34.5	-21.4	49.06	54	-4.94	-	-	191	137	H
4	* 5.35	36.47	RMS	34.5	-21.4	49.57	54	-4.43	-	-	191	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

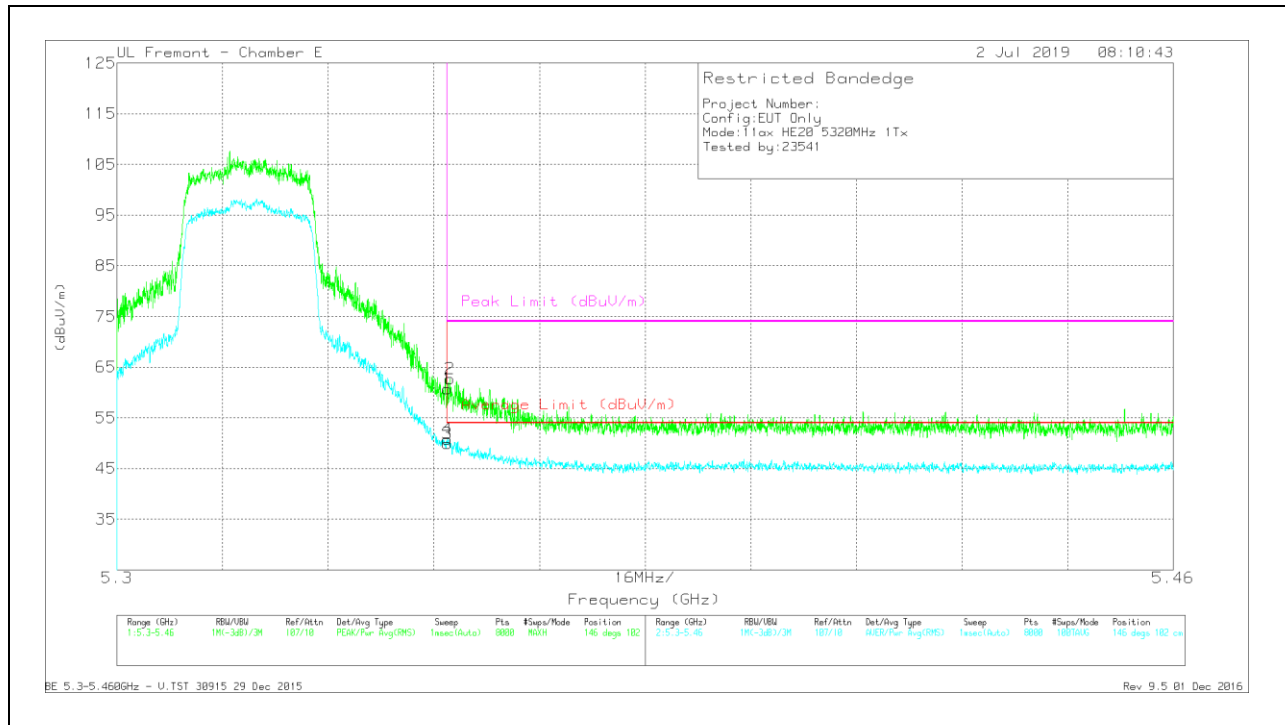

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.65	Pk	34.5	-21.4	60.75	-	-	74	-13.25	146	102	V
2	* 5.35	49.66	Pk	34.5	-21.4	62.76	-	-	74	-11.24	146	102	V
3	* 5.35	36.8	RMS	34.5	-21.4	49.9	54	-4.1	-	-	146	102	V
4	* 5.35	37.71	RMS	34.5	-21.4	50.81	54	-3.19	-	-	146	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

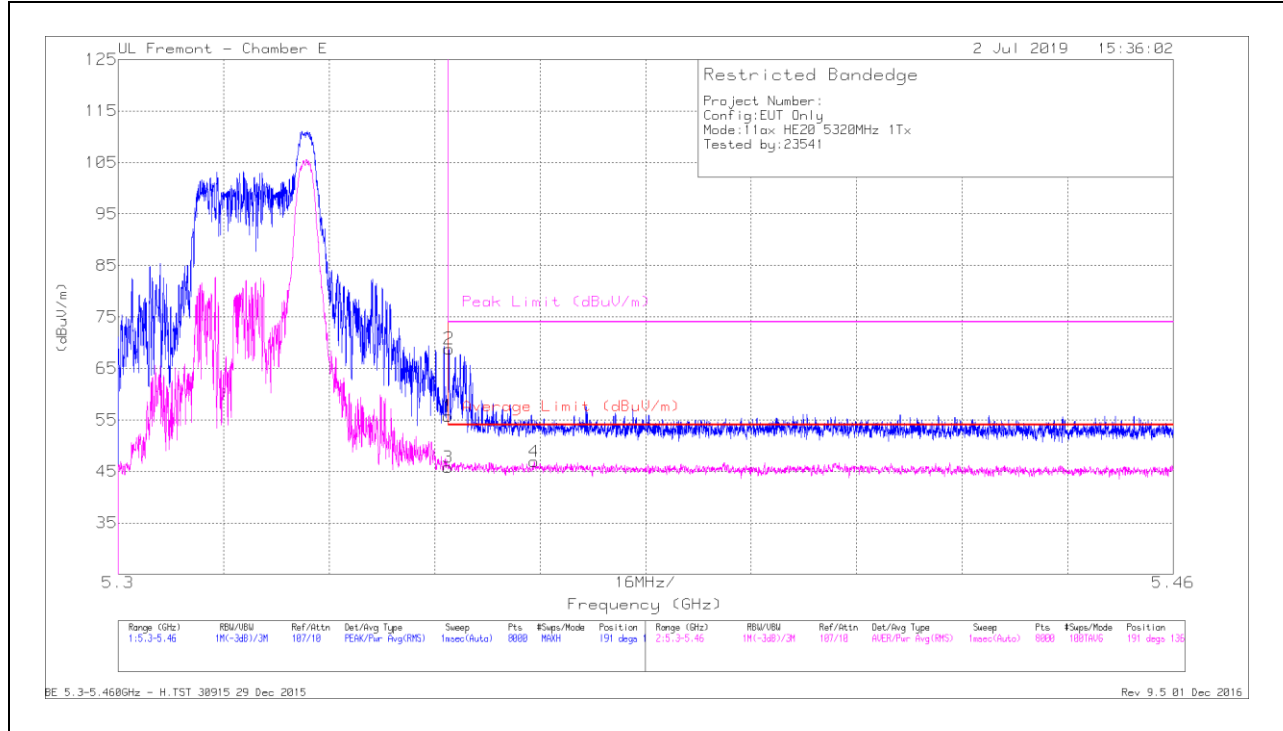


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.62	Pk	34.5	-21.4	55.72	-	-	74	-18.28	191	136	H
2	* 5.35	55.7	Pk	34.5	-21.4	68.8	-	-	74	-5.2	191	136	H
3	* 5.35	32.68	RMS	34.5	-21.4	45.78	54	-8.22	-	-	191	136	H
4	* 5.363	33.68	RMS	34.6	-21.4	46.88	54	-7.12	-	-	191	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

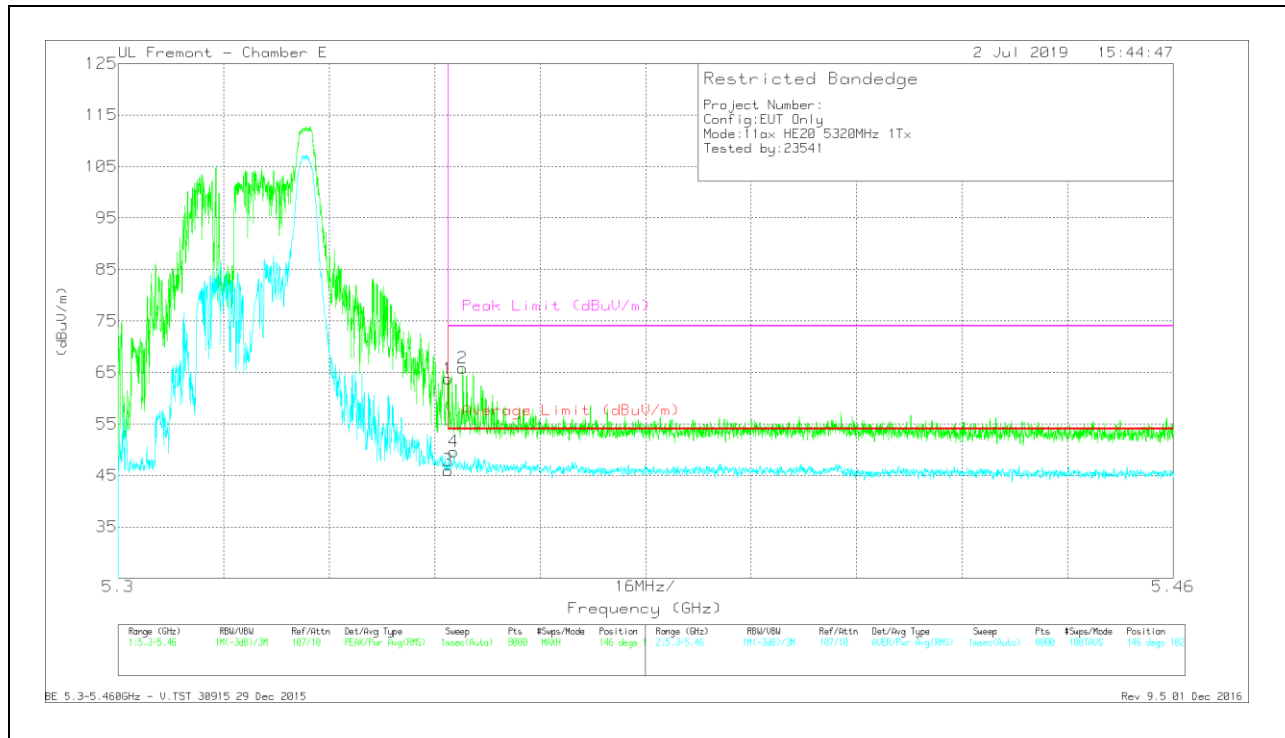

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	50.66	PK	34.5	-21.4	63.76	-	-	74	-10.24	146	102	V
2	* 5.352	52.72	PK	34.5	-21.4	65.82	-	-	74	-8.18	146	102	V
3	* 5.35	32.85	RMS	34.5	-21.4	45.95	54	-8.05	-	-	146	102	V
4	* 5.351	36.52	RMS	34.5	-21.4	49.62	54	-4.38	-	-	146	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

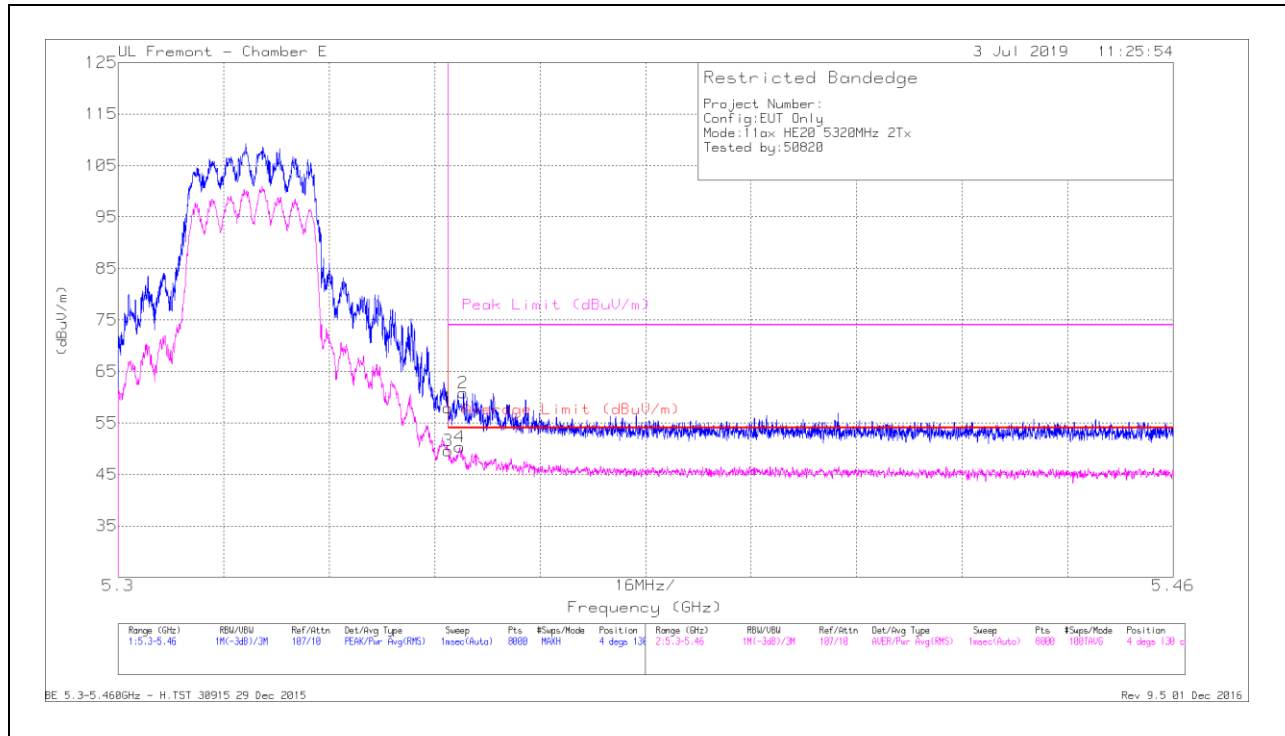


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.8	Pk	34.5	-21.4	57.9	-	-	74	-16.1	4	130	H
3	* 5.35	36.46	RMS	34.5	-21.4	49.56	54	-4.44	-	-	4	130	H
2	* 5.352	47.71	Pk	34.5	-21.4	60.81	-	-	74	-13.19	4	130	H
4	* 5.352	37.21	RMS	34.5	-21.4	50.31	54	-3.69	-	-	4	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

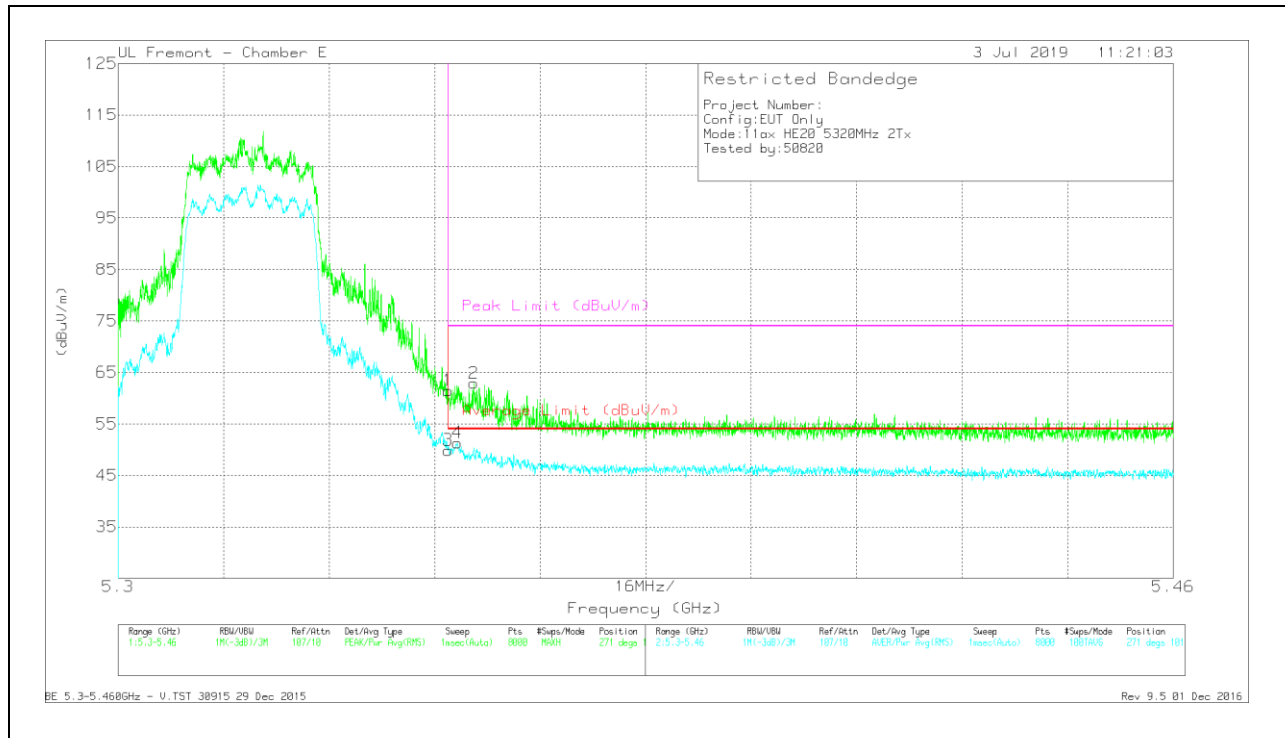

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.37	Pk	34.5	-21.4	61.47	-	-	74	-12.53	271	101	V
3	* 5.35	36.79	RMS	34.5	-21.4	49.89	54	-4.11	-	-	271	101	V
4	* 5.351	38.22	RMS	34.5	-21.4	51.32	54	-2.68	-	-	271	101	V
2	* 5.354	49.8	Pk	34.5	-21.4	62.9	-	-	74	-11.1	271	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

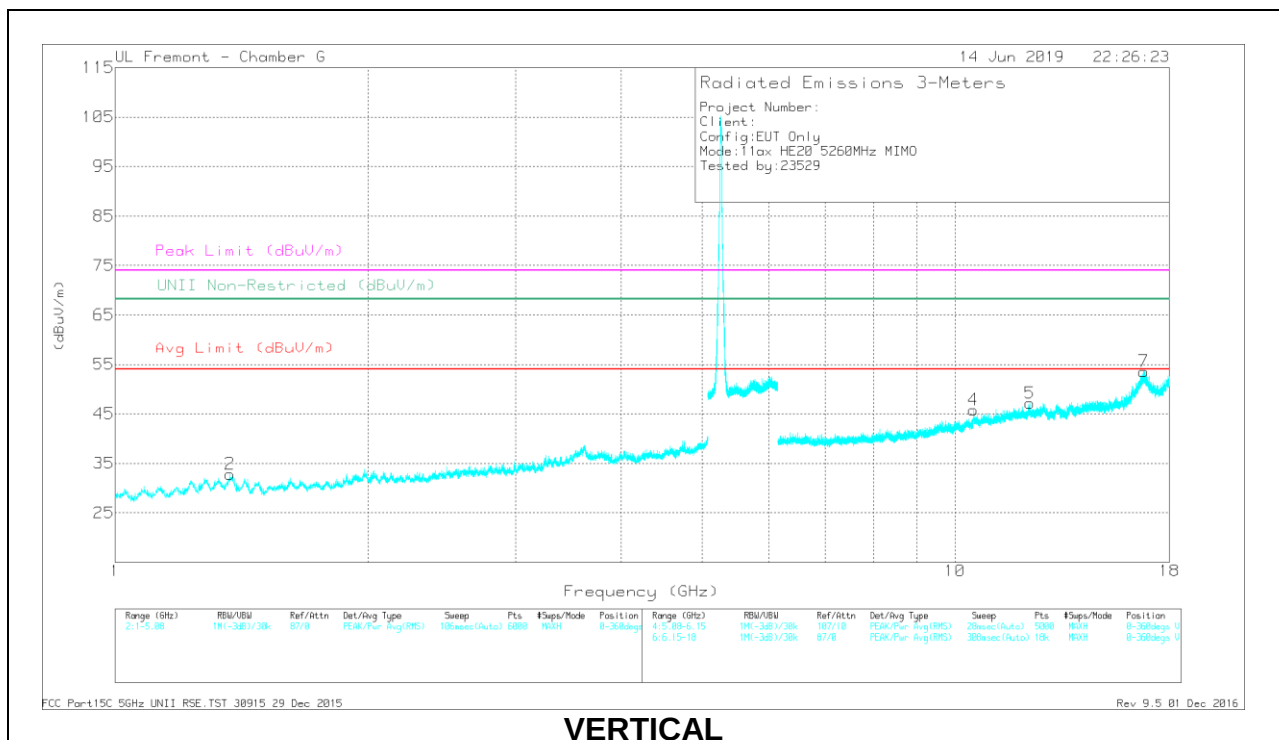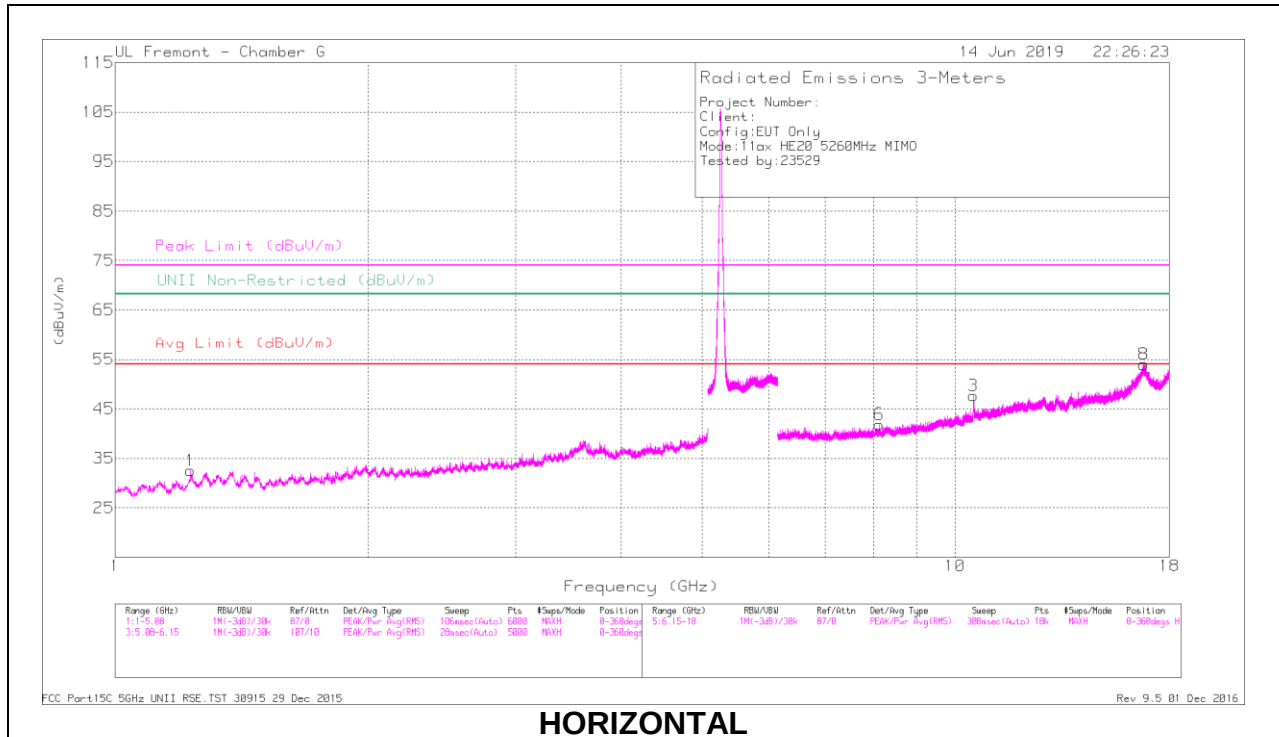

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.228	43.5	PK-U	29.1	-33.1	39.5	-	-	74	-34.5	-	-	122	169	H
	* 1.229	31.67	ADR	29.1	-33.1	27.67	54	-26.33	-	-	-	-	122	169	H
2	* 1.369	43.16	PK-U	30	-32.2	40.96	-	-	74	-33.04	-	-	307	238	V
	* 1.371	31.22	ADR	29.9	-32.2	28.92	54	-25.08	-	-	-	-	307	238	V
6	* 8.121	38.39	PK-U	36.1	-26.5	47.99	-	-	74	-26.01	-	-	172	210	H
	* 8.122	27.4	ADR	36.1	-26.5	37	54	-17	-	-	-	-	172	210	H
5	* 12.282	36.26	PK-U	39.5	-22.4	53.36	-	-	74	-20.64	-	-	197	173	V
	* 12.281	25.13	ADR	39.5	-22.4	42.23	54	-11.77	-	-	-	-	197	173	V
3	10.515	39.21	PK-U	38	-24.1	53.11	-	-	-	-	68.2	-15.09	282	200	H
4	10.524	37.28	PK-U	38	-23.9	51.38	-	-	-	-	68.2	-16.82	68	200	V
7	16.781	35.86	PK-U	41.8	-16.9	60.76	-	-	-	-	68.2	-7.44	186	245	V
8	16.783	36.55	PK-U	41.8	-16.9	61.45	-	-	-	-	68.2	-6.75	47	154	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

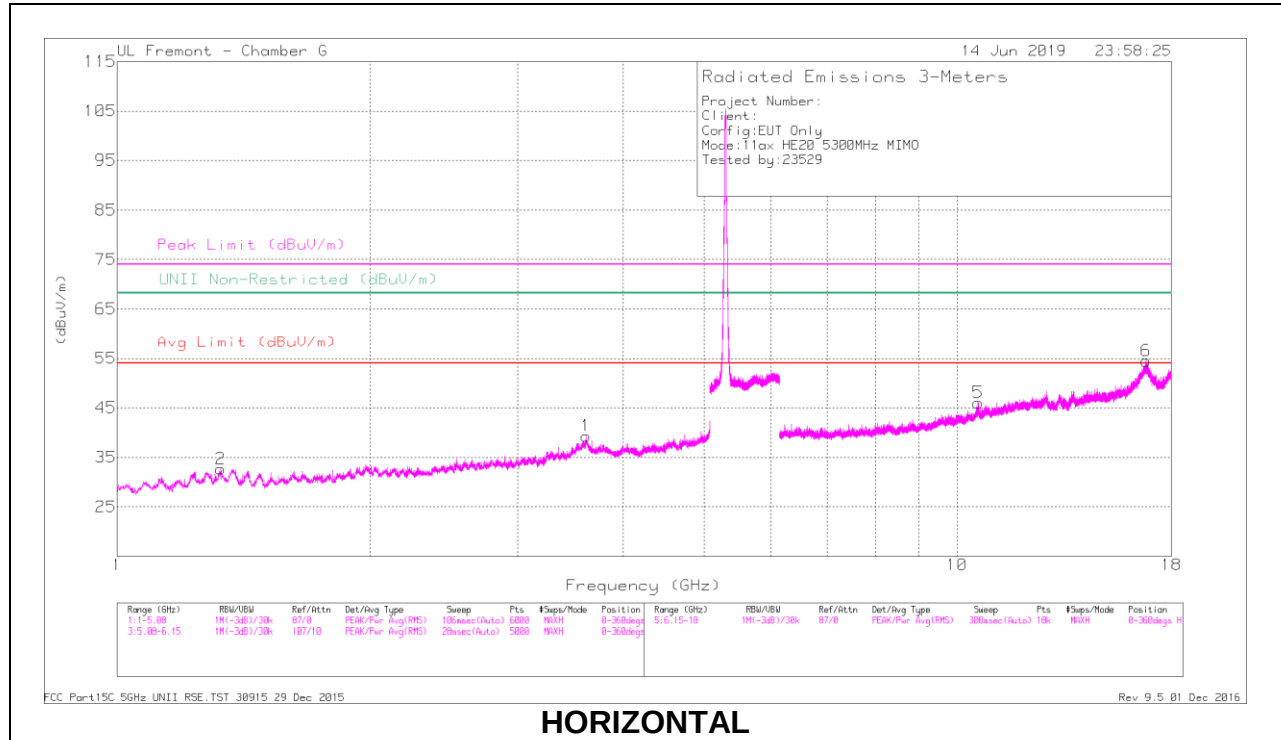

HORIZONTAL

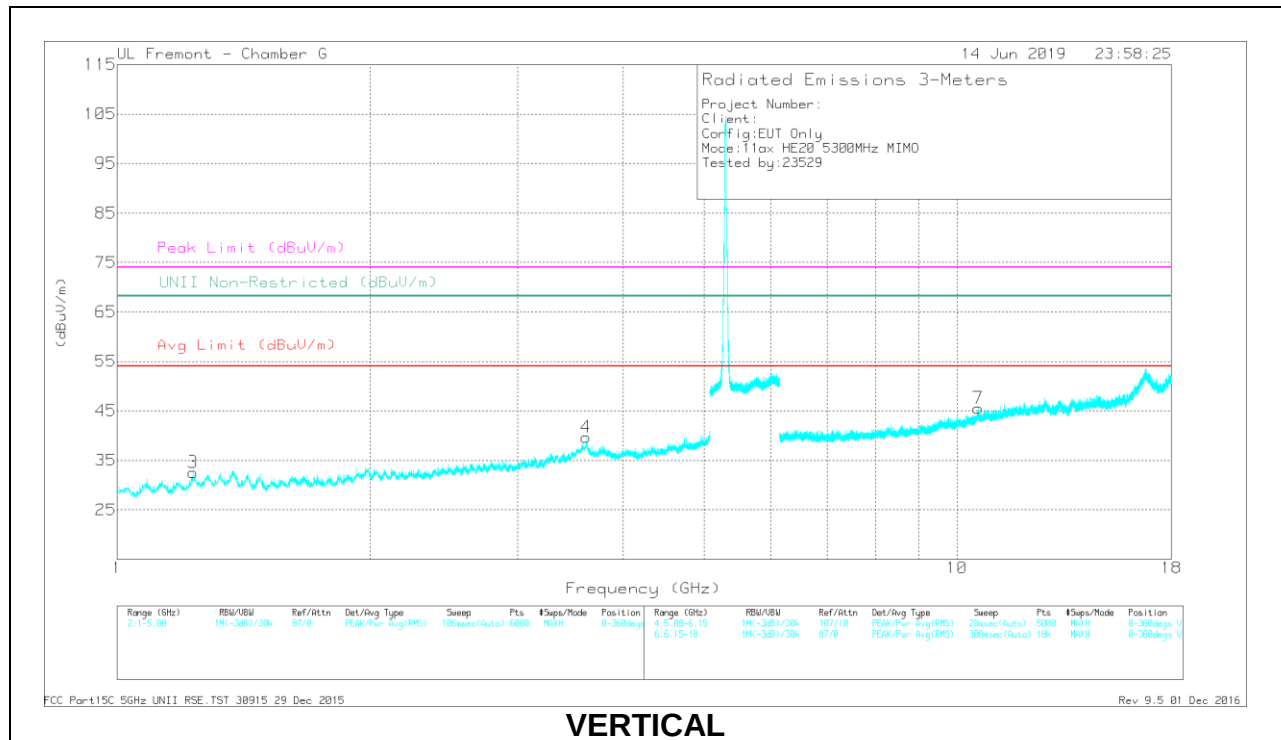

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.616	40.47	PK-U	35.6	-30.3	45.77	-	-	74	-28.23	-	-	254	125	H
	* 3.618	28.96	ADR	35.7	-30.3	34.36	54	-19.64	-	-	-	-	254	125	H
2	* 1.328	42.81	PK-U	29.7	-33.1	39.41	-	-	74	-34.59	-	-	134	199	H
	* 1.327	31.32	ADR	29.7	-33.1	27.92	54	-26.08	-	-	-	-	134	199	H
3	* 1.233	43.75	PK-U	29.2	-33.1	39.85	-	-	74	-34.15	-	-	286	210	V
	* 1.232	31.88	ADR	29.2	-33.1	27.98	54	-26.02	-	-	-	-	286	210	V
4	* 3.62	40.29	PK-U	35.7	-30.3	45.69	-	-	74	-28.31	-	-	97	238	V
	* 3.62	29.21	ADR	35.7	-30.3	34.61	54	-19.39	-	-	-	-	97	238	V
7	* 10.601	37.48	PK-U	38.2	-23.6	52.08	-	-	74	-21.92	-	-	247	376	V
	* 10.601	25.84	ADR	38.2	-23.6	40.44	54	-13.56	-	-	-	-	247	376	V
5	10.599	40.91	PK-U	38.1	-23.5	55.51	-	-	-	-	68.2	-12.69	213	228	H
6	16.795	36.67	PK-U	41.8	-17.2	61.27	-	-	-	-	68.2	-6.93	354	400	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

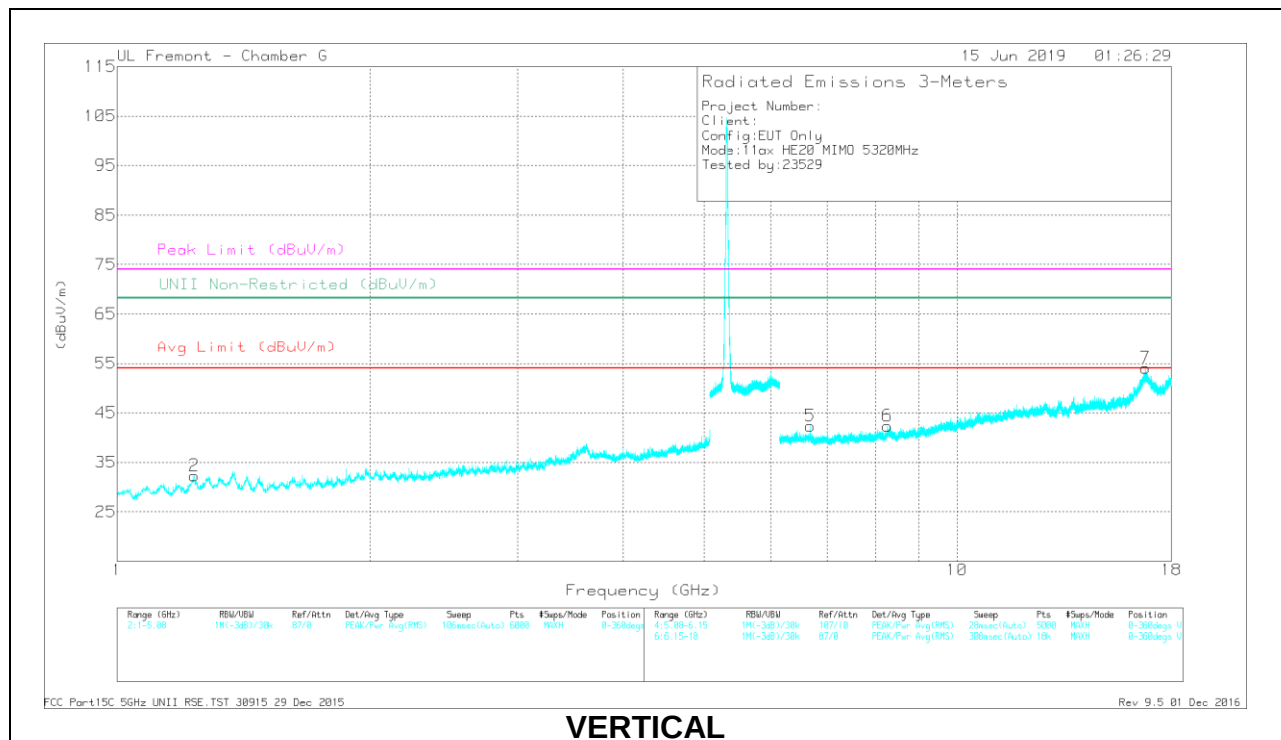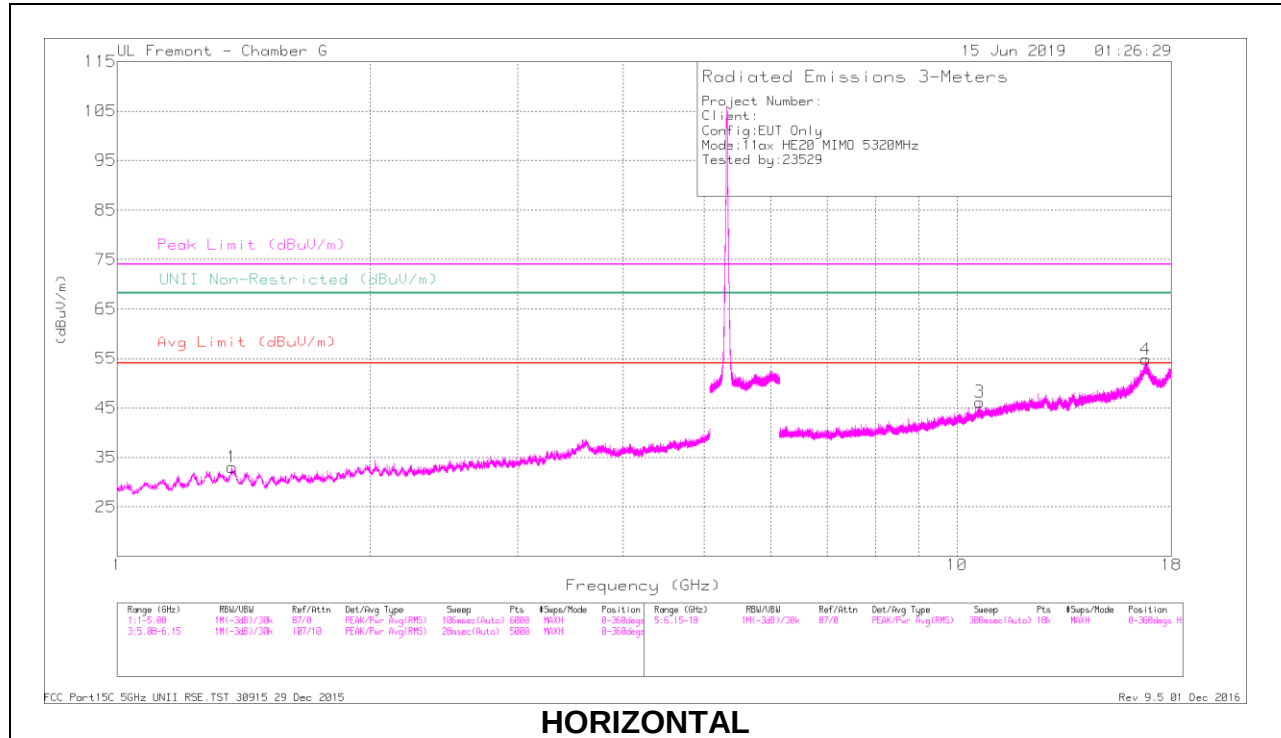

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.372	42.98	PK-U	29.9	-32.2	40.68	-	-	74	-33.32	-	-	360	101	H
	* 1.372	31.18	ADR	29.8	-32.2	28.78	54	-25.22	-	-	-	-	360	101	H
2	* 1.236	43.54	PK-U	29.2	-33.1	39.64	-	-	74	-34.36	-	-	224	154	V
	* 1.236	31.91	ADR	29.2	-33.1	28.01	54	-25.99	-	-	-	-	224	154	V
3	* 10.642	37.21	PK-U	38.2	-23.8	51.61	-	-	74	-22.39	-	-	111	197	H
	* 10.64	26.15	ADR	38.2	-23.9	40.45	54	-13.55	-	-	-	-	111	197	H
6	* 8.263	38.1	PK-U	36.1	-25.9	48.3	-	-	74	-25.7	-	-	64	213	V
	* 8.264	27.21	ADR	36.1	-25.9	37.41	54	-16.59	-	-	-	-	64	213	V
5	6.684	39.26	PK-U	36.1	-28.1	47.26	-	-	-	-	68.2	-20.94	42	238	V
4	16.781	36.75	PK-U	41.8	-16.9	61.65	-	-	-	-	68.2	-6.55	160	202	H
7	16.782	35.91	PK-U	41.7	-16.9	60.71	-	-	-	-	68.2	-7.49	179	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

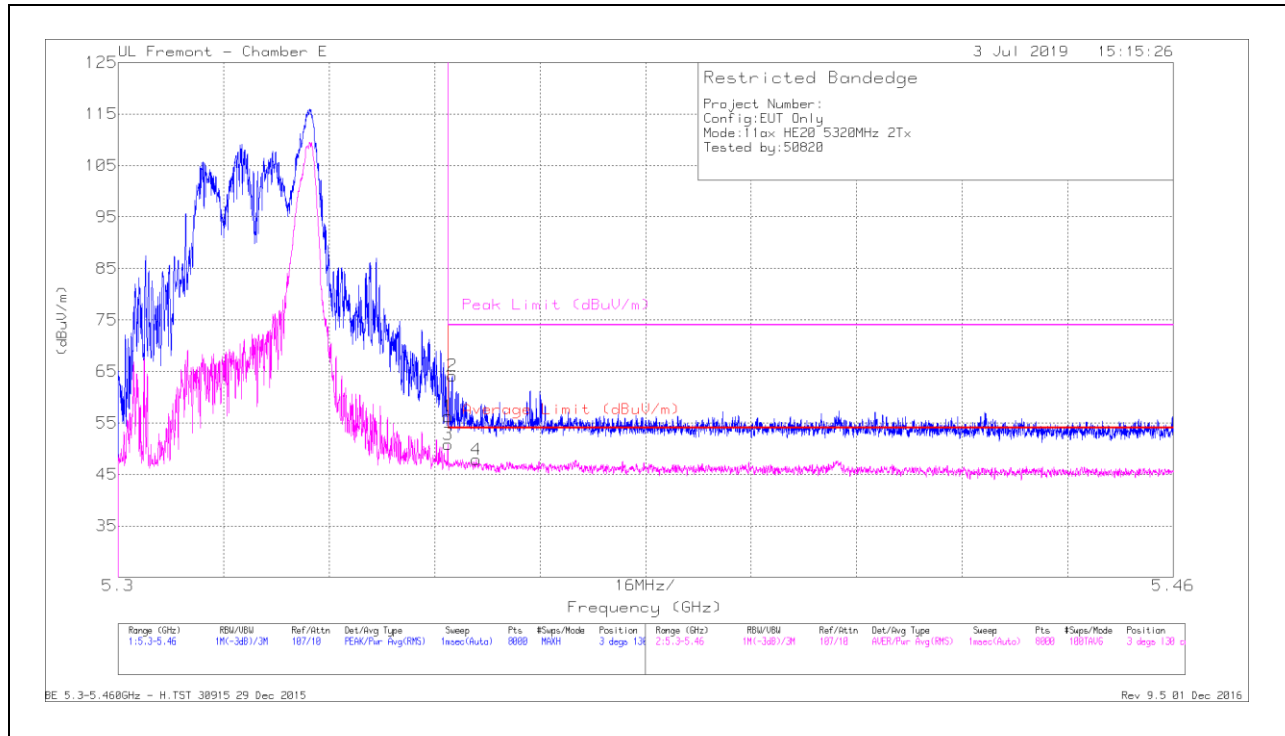


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.17	Pk	34.5	-21.4	56.27	-	-	74	-17.73	3	130	H
3	* 5.35	37.75	RMS	34.5	-21.4	50.85	54	-3.15	-	-	3	130	H
2	* 5.351	51.07	Pk	34.5	-21.4	64.17	-	-	74	-9.83	3	130	H
4	* 5.354	34.75	RMS	34.5	-21.4	47.85	54	-6.15	-	-	3	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

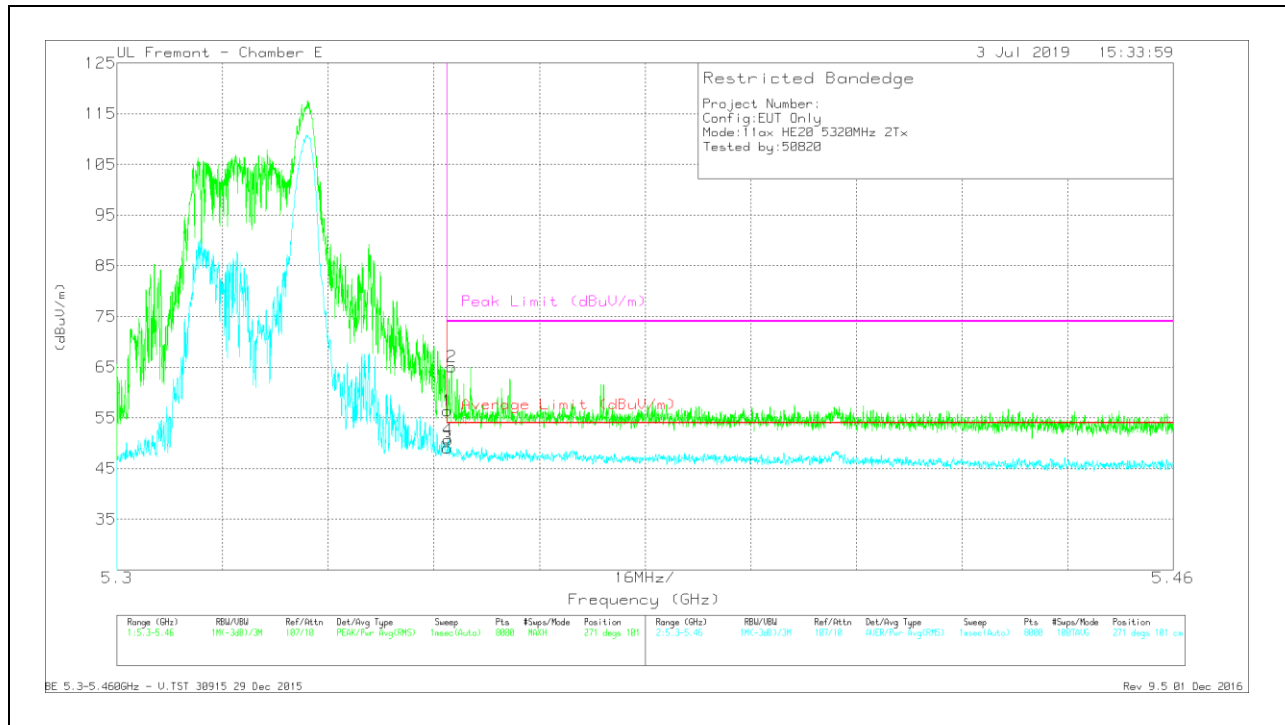

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.33	Pk	34.5	-21.4	56.43	-	-	74	-17.57	271	101	V
3	* 5.35	35.95	RMS	34.5	-21.4	49.05	54	-4.95	-	-	271	101	V
4	* 5.35	37.52	RMS	34.5	-21.4	50.62	54	-3.38	-	-	271	101	V
2	* 5.351	51.94	PK	34.5	-21.4	65.04	-	-	74	-8.96	271	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

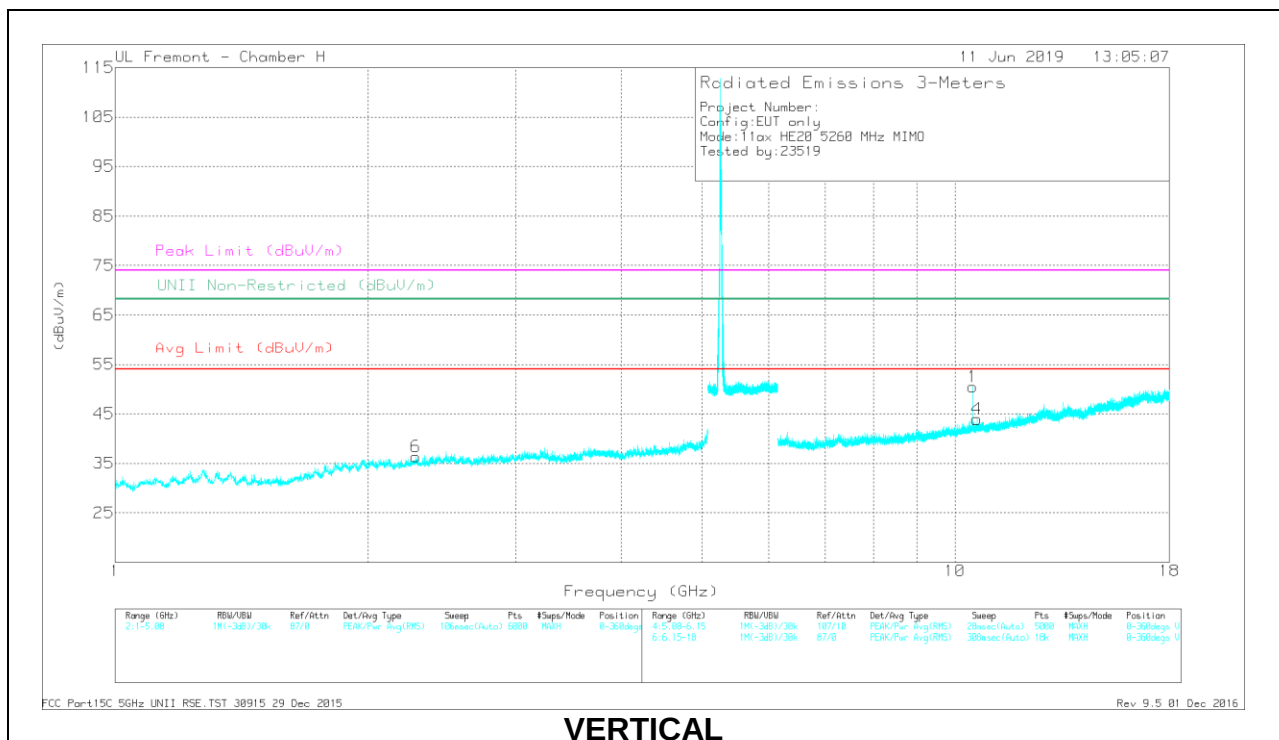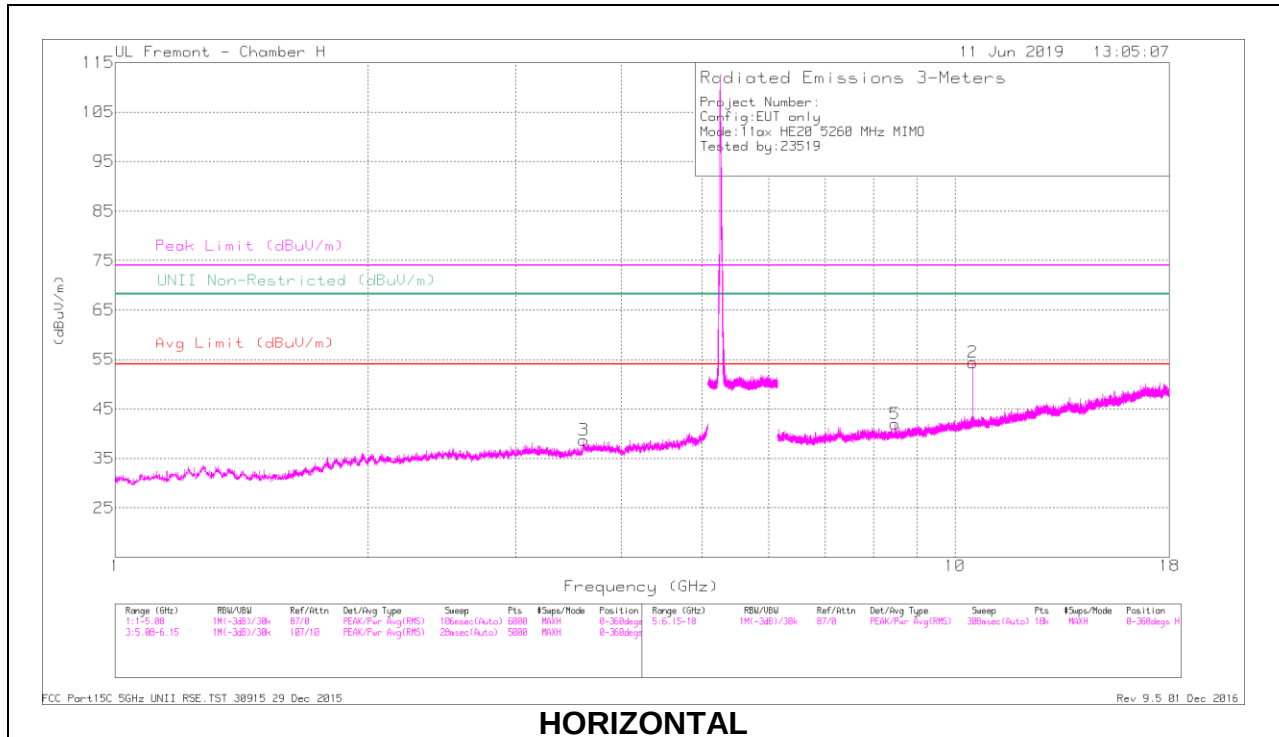

RADIATED EMISSIONS


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 3.613	41.85	PK-U	33.1	-31	43.95	-	-	74	-30.05	-	-	122	150	H
	* 3.611	30.75	ADR	33.1	-31	32.85	54	-21.15	-	-	-	-	122	150	H
6	* 2.28	43.91	PK-U	31.9	-31.9	43.91	-	-	74	-30.09	-	-	226	208	V
	* 2.28	31.84	ADR	31.9	-31.9	31.84	54	-22.16	-	-	-	-	226	208	V
5	* 8.483	37.76	PK-U	36	-26.2	47.56	-	-	74	-26.44	-	-	240	329	H
	* 8.483	26.58	ADR	36	-26.2	36.38	54	-17.62	-	-	-	-	240	329	H
4	* 10.616	36.01	PK-U	37.6	-23.7	49.91	-	-	74	-24.09	-	-	100	205	V
	* 10.619	24.83	ADR	37.6	-23.7	38.73	54	-15.27	-	-	-	-	100	205	V
2	10.502	39.97	PK-U	37.5	-23.9	53.57	-	-	-	-	68.2	-14.63	341	293	H
1	10.503	42.64	PK-U	37.5	-23.9	56.24	-	-	-	-	68.2	-11.96	234	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

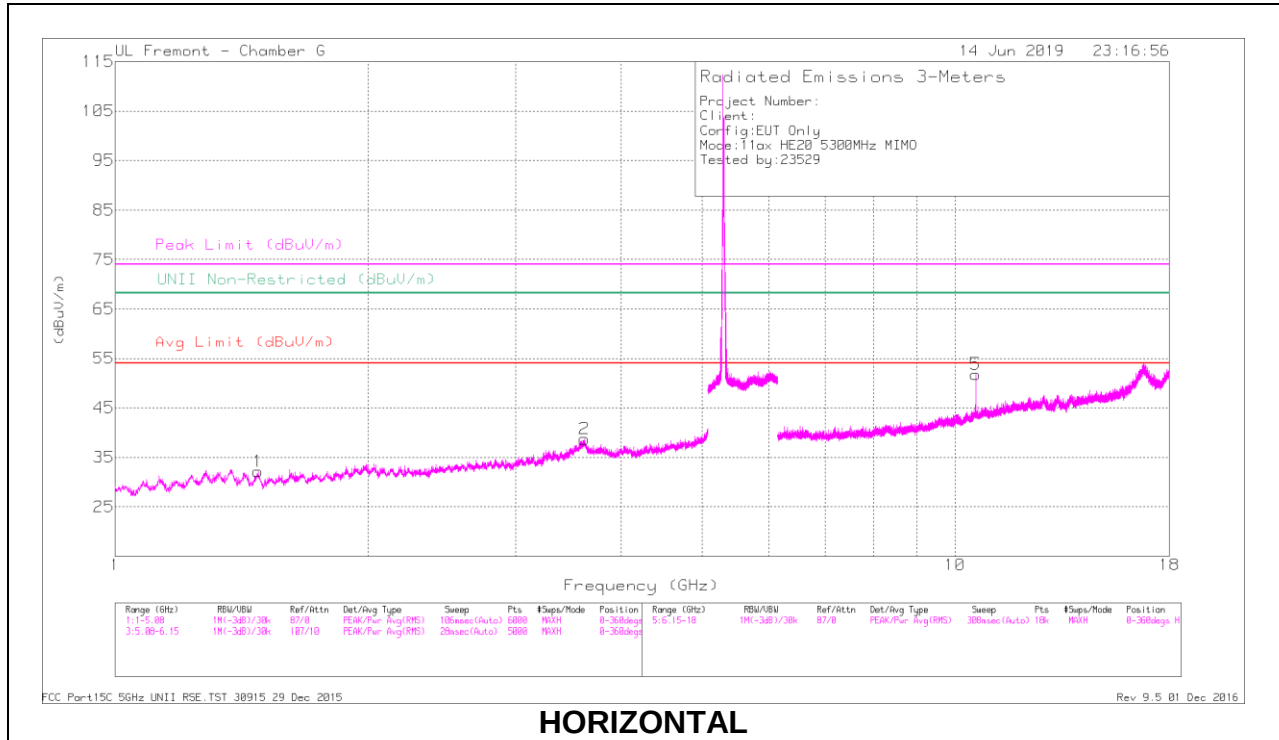

HORIZONTAL

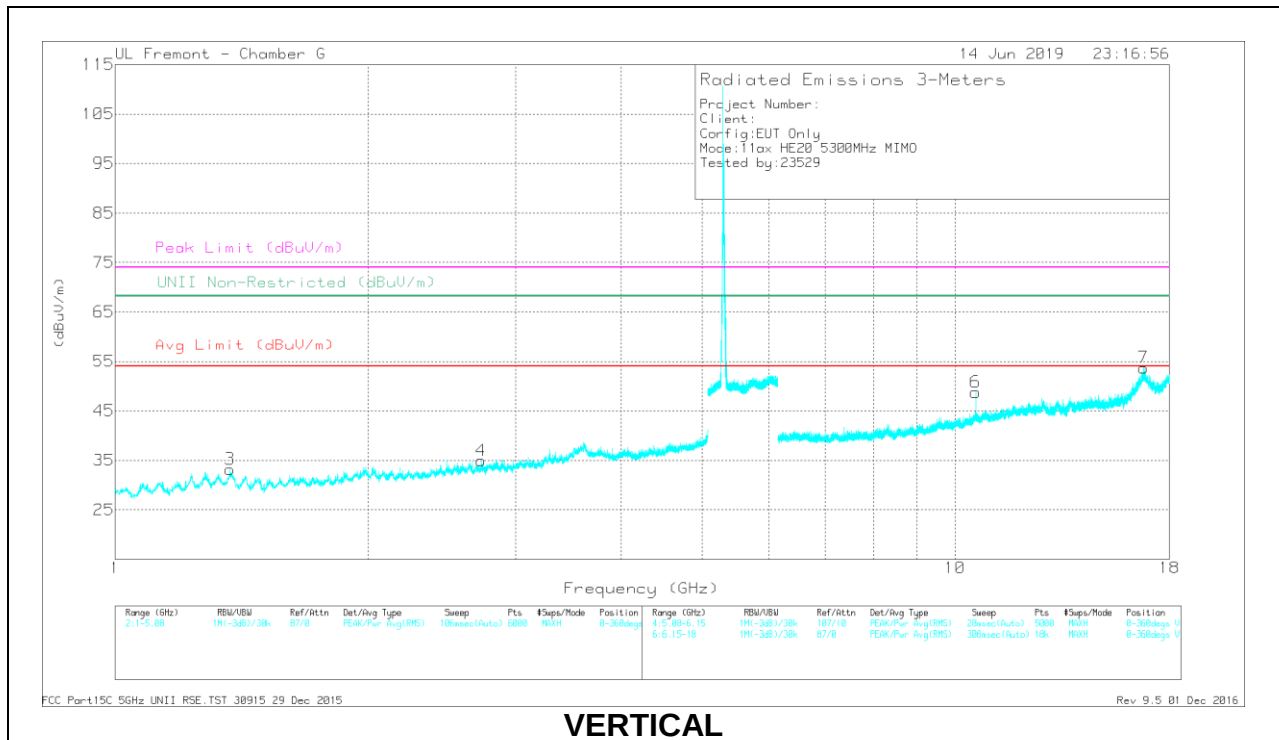

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.478	42.36	PK-U	28.3	-31.4	39.26	-	-	74	-34.74	-	-	216	183	H
	* 1.478	30.8	ADR	28.3	-31.4	27.7	54	-26.3	-	-	-	-	216	183	H
2	* 3.62	40.7	PK-U	35.7	-30.3	46.1	-	-	74	-27.9	-	-	177	212	H
	* 3.619	29.27	ADR	35.7	-30.3	34.67	54	-19.33	-	-	-	-	177	212	H
3	* 1.369	42.78	PK-U	30	-32.2	40.58	-	-	74	-33.42	-	-	158	164	V
	* 1.371	31.36	ADR	29.9	-32.2	29.06	54	-24.94	-	-	-	-	158	164	V
4	* 2.728	40.59	PK-U	32.7	-31.8	41.49	-	-	74	-32.51	-	-	169	203	V
	* 2.727	29.05	ADR	32.7	-31.8	29.95	54	-24.05	-	-	-	-	169	203	V
5	10.583	44.79	PK-U	38.1	-23.5	59.39	-	-	-	-	68.2	-8.81	221	229	H
6	10.583	40.86	PK-U	38.1	-23.5	55.46	-	-	-	-	68.2	-12.74	293	111	V
7	16.779	36	PK-U	41.7	-16.9	60.8	-	-	-	-	68.2	-7.4	335	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

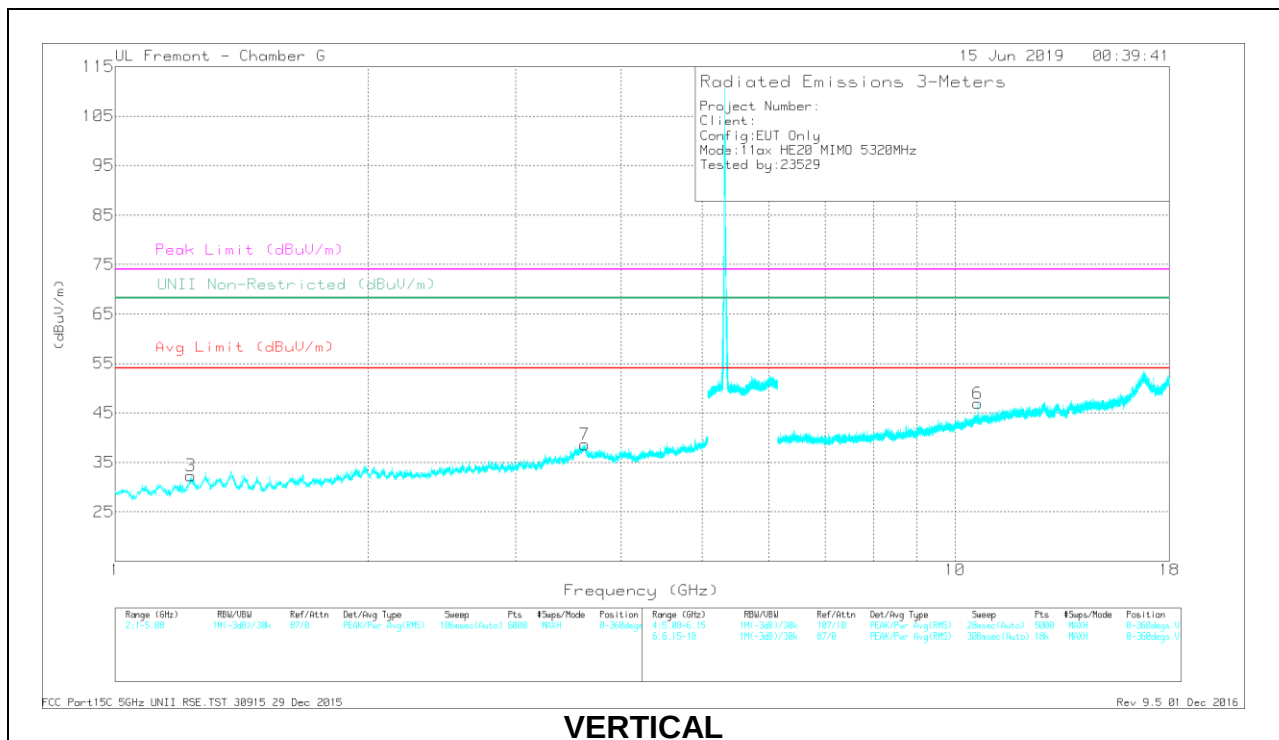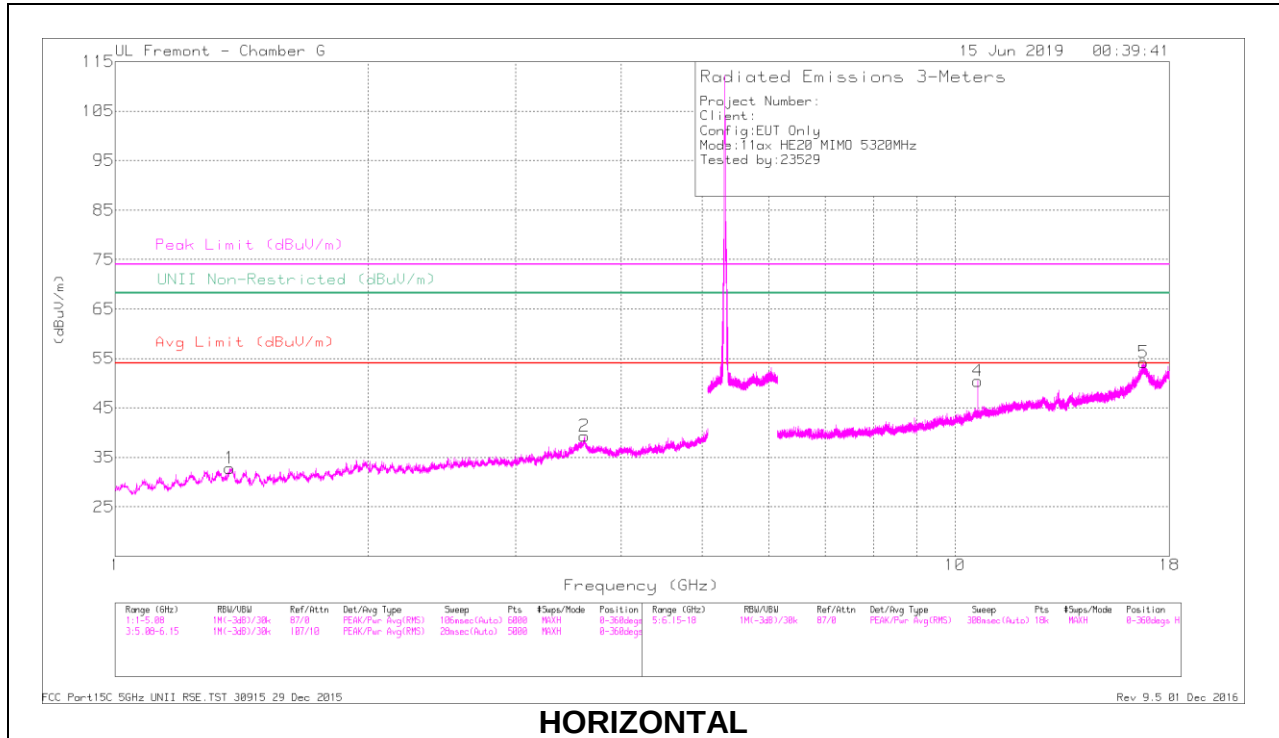

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.368	43.25	PK-U	30	-32.2	41.05	-	-	74	-32.95	-	-	360	100	H
	* 1.37	31.08	ADR	29.9	-32.2	28.78	54	-25.22	-	-	-	-	360	100	H
2	* 3.622	40.89	PK-U	35.7	-30.3	46.29	-	-	74	-27.71	-	-	187	164	H
	* 3.621	29.16	ADR	35.7	-30.3	34.56	54	-19.44	-	-	-	-	187	164	H
3	* 1.231	43	PK-U	29.2	-33.1	39.1	-	-	74	-34.9	-	-	298	204	V
	* 1.231	31.64	ADR	29.2	-33.1	27.74	54	-26.26	-	-	-	-	298	204	V
7	* 3.623	40.43	PK-U	35.6	-30.3	45.73	-	-	74	-28.27	-	-	86	177	V
	* 3.625	29.21	ADR	35.5	-30.3	34.41	54	-19.59	-	-	-	-	86	177	V
4	* 10.64	42.97	PK-U	38.2	-23.9	57.27	-	-	74	-16.73	-	-	215	236	H
	* 10.64	33.59	ADR	38.2	-23.9	47.89	54	-6.11	-	-	-	-	215	236	H
6	* 10.64	38.53	PK-U	38.2	-23.9	52.63	-	-	74	-21.17	-	-	275	181	V
	* 10.64	28.1	ADR	38.2	-23.9	42.4	54	-11.6	-	-	-	-	275	181	V
5	16.777	36.38	PK-U	41.8	-16.9	61.28	-	-	-	-	68.2	-6.92	175	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

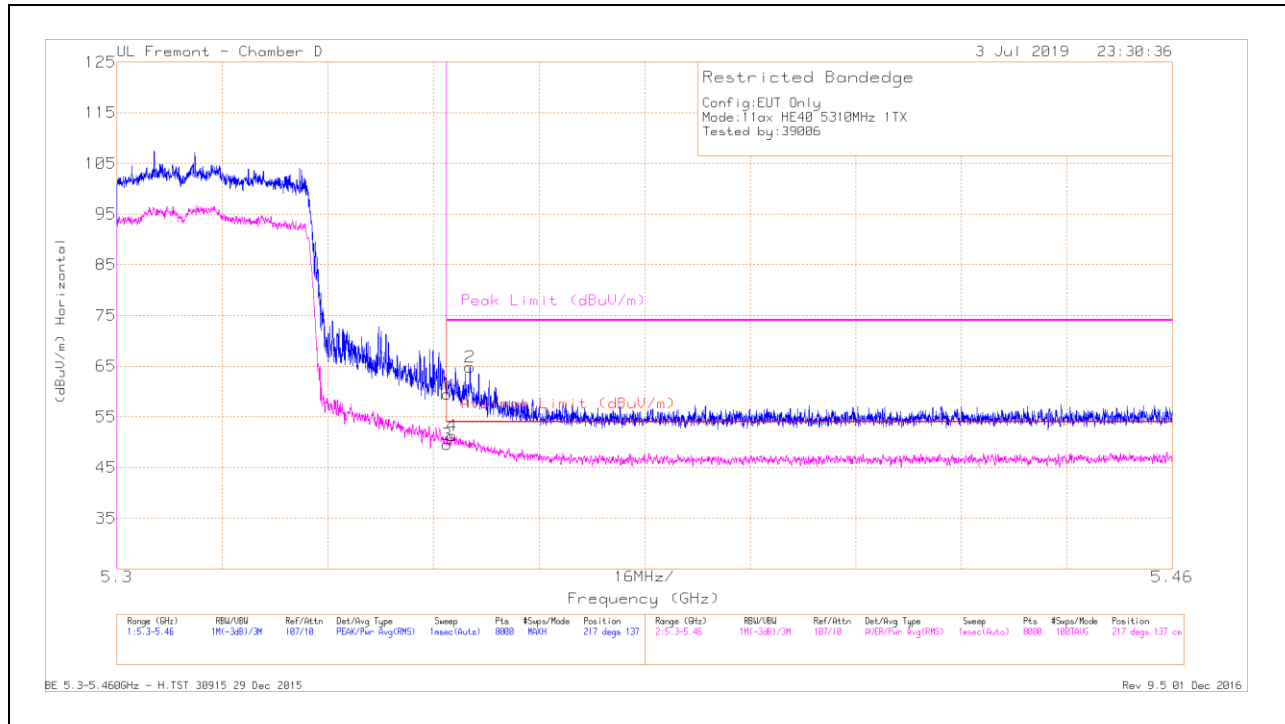


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.49	PK	34.3	-18.3	59.49	-	-	74	-14.51	217	137	H
2	* 5.354	48.96	PK	34.3	-18.4	64.86	-	-	74	-9.14	217	137	H
3	* 5.35	33.56	RMS	34.3	-18.3	49.56	54	-4.44	-	-	217	137	H
4	* 5.351	35.25	RMS	34.3	-18.3	51.25	54	-2.75	-	-	217	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

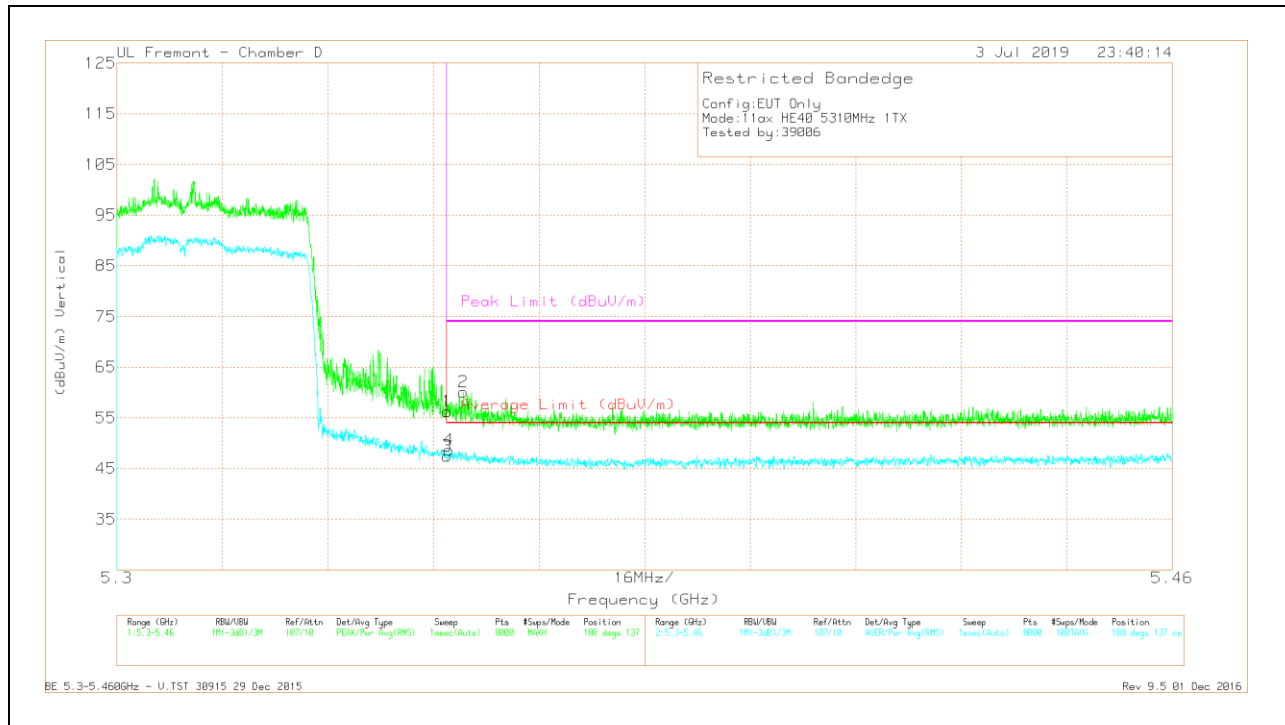

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.22	Pk	34.3	-18.3	56.22	-	-	74	-17.78	188	137	V
2	* 5.353	44.2	Pk	34.3	-18.4	60.1	-	-	74	-13.9	188	137	V
3	* 5.35	31.39	RMS	34.3	-18.3	47.39	54	-6.61	-	-	188	137	V
4	* 5.35	32.7	RMS	34.3	-18.3	48.7	54	-5.3	-	-	188	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

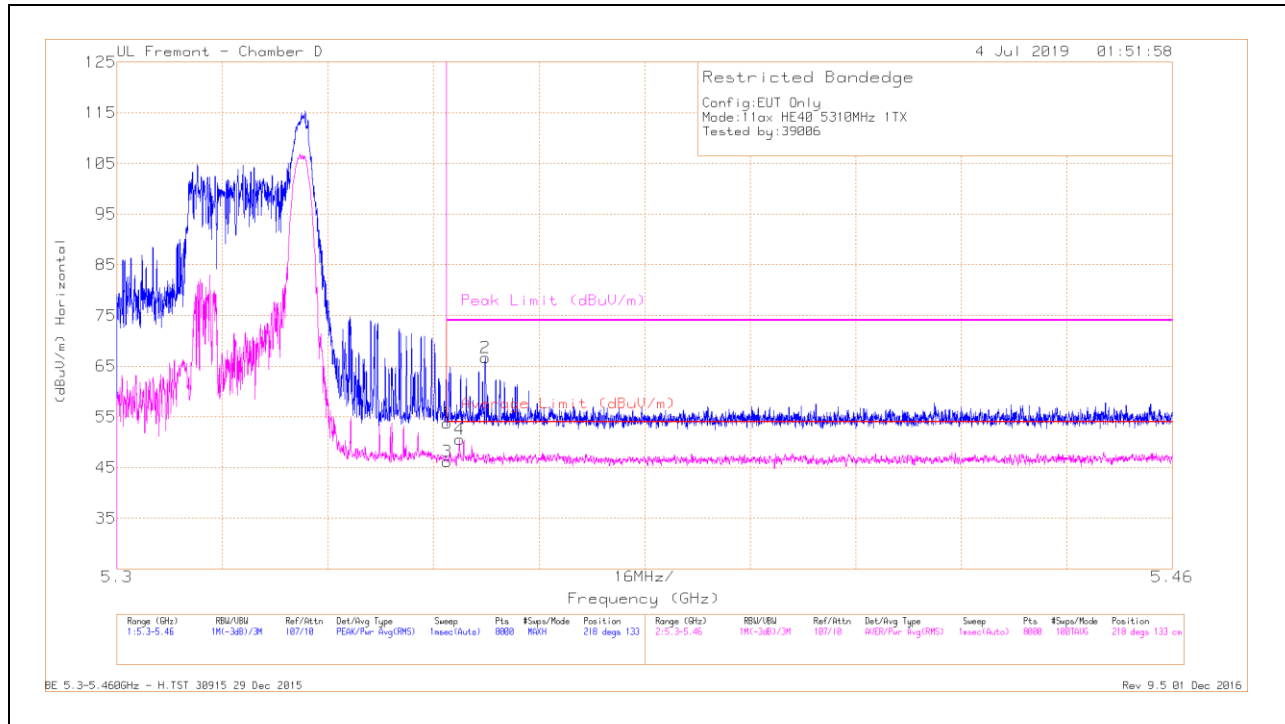


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.81	Pk	34.3	-18.3	53.81	-	-	74	-20.19	218	133	H
2	* 5.356	50.82	PK	34.3	-18.4	66.72	-	-	74	-7.28	218	133	H
3	* 5.35	30.24	RMS	34.3	-18.3	46.24	54	-7.76	-	-	218	133	H
4	* 5.352	34.57	RMS	34.3	-18.3	50.57	54	-3.43	-	-	218	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

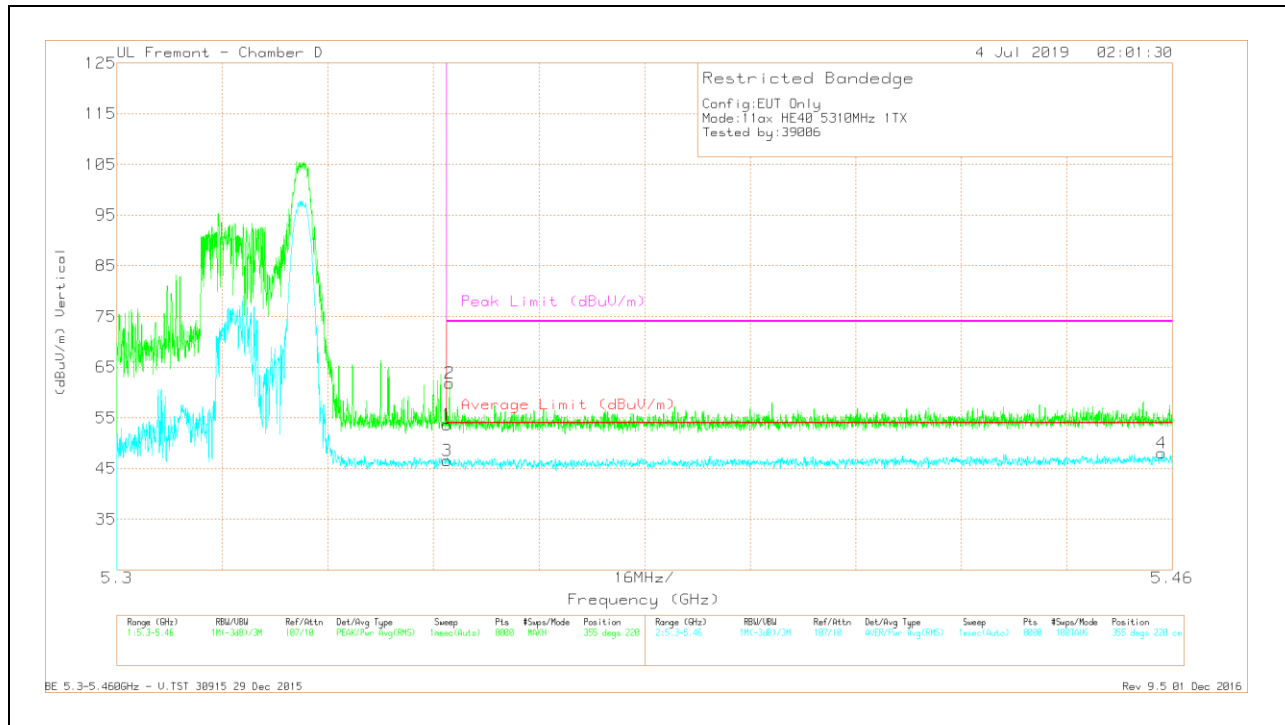

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.69	Pk	34.3	-18.3	53.69	-	-	74	-20.31	355	220	V
2	* 5.35	45.86	Pk	34.3	-18.3	61.86	-	-	74	-12.14	355	220	V
3	* 5.35	30.52	RMS	34.3	-18.3	46.52	54	-7.48	-	-	355	220	V
4	* 5.458	31.61	RMS	34.4	-17.9	48.11	54	-5.89	-	-	355	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

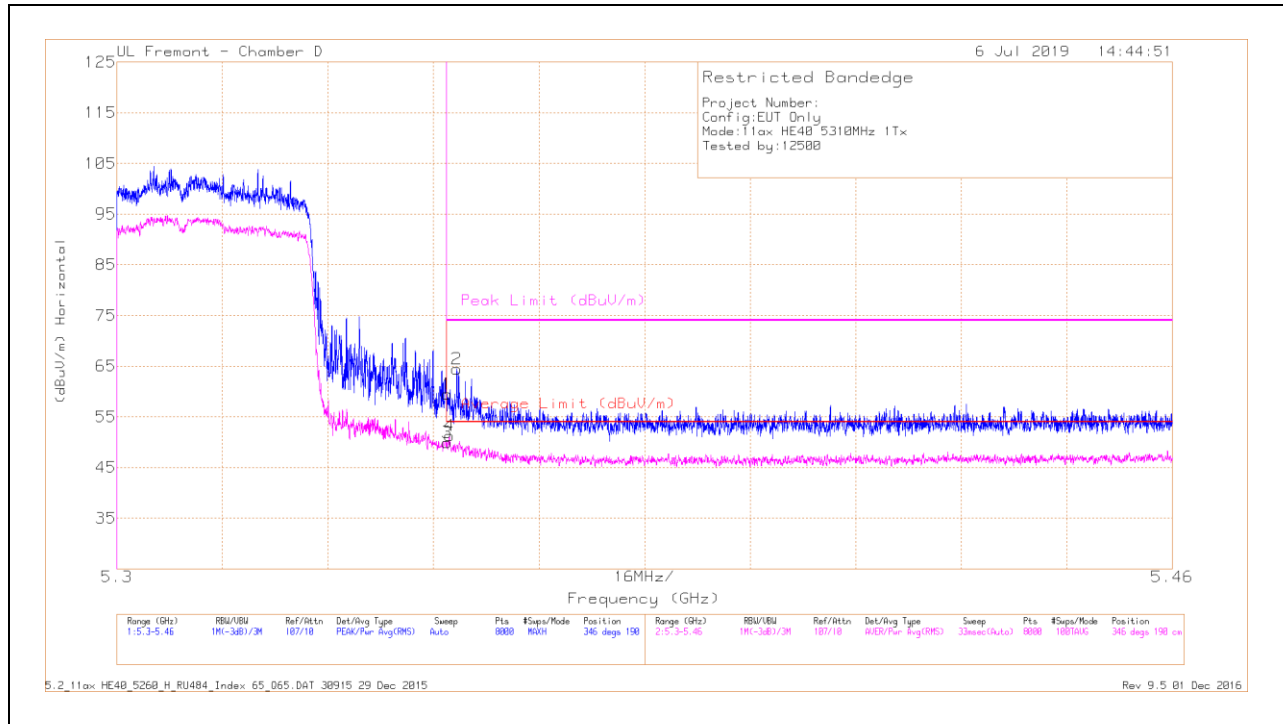


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.49	Pk	34.3	-18.3	59.49	-	-	74	-14.51	346	190	H
2	* 5.352	48.39	PK	34.3	-18.3	64.39	-	-	74	-9.61	346	190	H
3	* 5.35	33.87	RMS	34.3	-18.3	49.87	54	-4.13	-	-	346	190	H
4	* 5.35	35.27	RMS	34.3	-18.3	51.27	54	-2.73	-	-	346	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

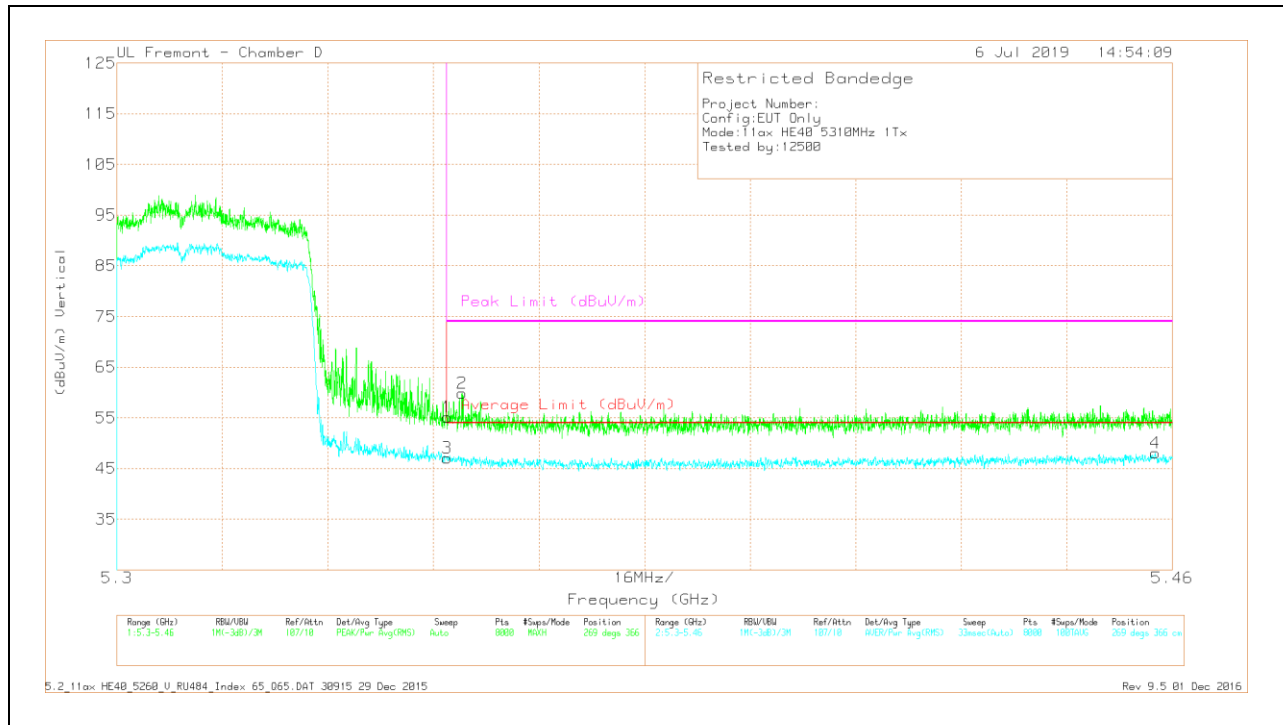

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.15	Pk	34.3	-18.3	55.15	-	-	74	-18.85	269	366	V
3	* 5.35	31.03	RMS	34.3	-18.3	47.03	54	-6.97	-	-	269	366	V
2	* 5.352	43.81	PK	34.3	-18.3	59.81	-	-	74	-14.19	269	366	V
4	* 5.457	31.6	RMS	34.4	-17.9	48.1	54	-5.9	-	-	269	366	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

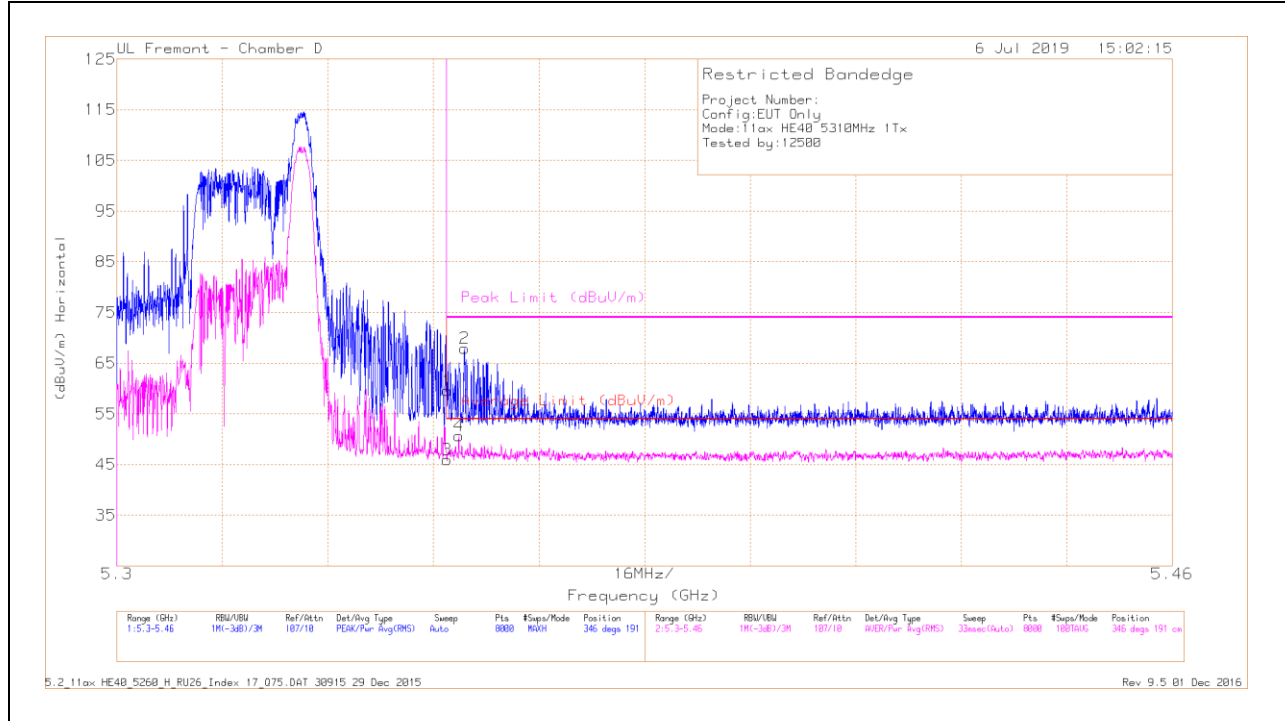


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.57	Pk	34.3	-18.3	59.57	-	-	74	-14.43	346	191	H
2	* 5.353	52.07	PK	34.3	-18.4	67.97	-	-	74	-6.03	346	191	H
3	* 5.35	29.94	RMS	34.3	-18.3	45.94	54	-8.06	-	-	346	191	H
4	* 5.352	34.67	RMS	34.3	-18.3	50.67	54	-3.33	-	-	346	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

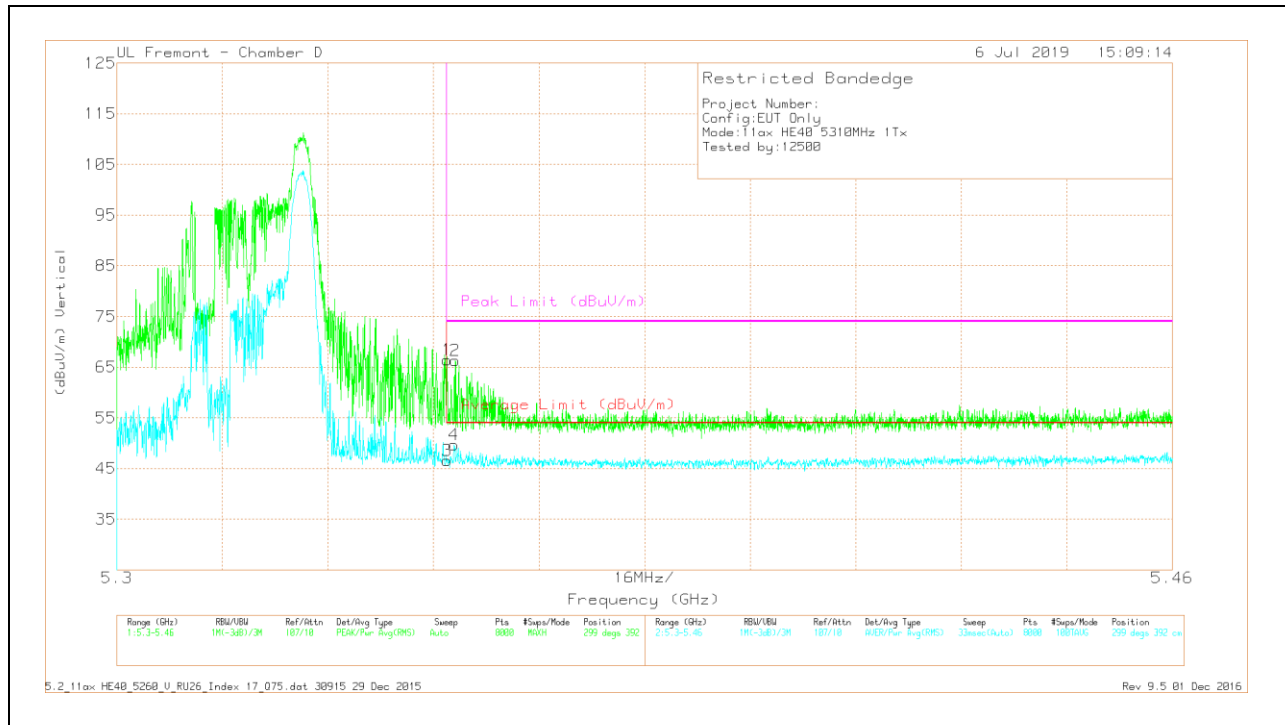

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	50.41	Pk	34.3	-18.3	66.41	-	-	74	-7.59	299	392	V
2	* 5.351	50.3	Pk	34.3	-18.3	66.3	-	-	74	-7.7	299	392	V
3	* 5.35	30.56	RMS	34.3	-18.3	46.56	54	-7.44	-	-	299	392	V
4	* 5.351	33.62	RMS	34.3	-18.3	49.62	54	-4.38	-	-	299	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

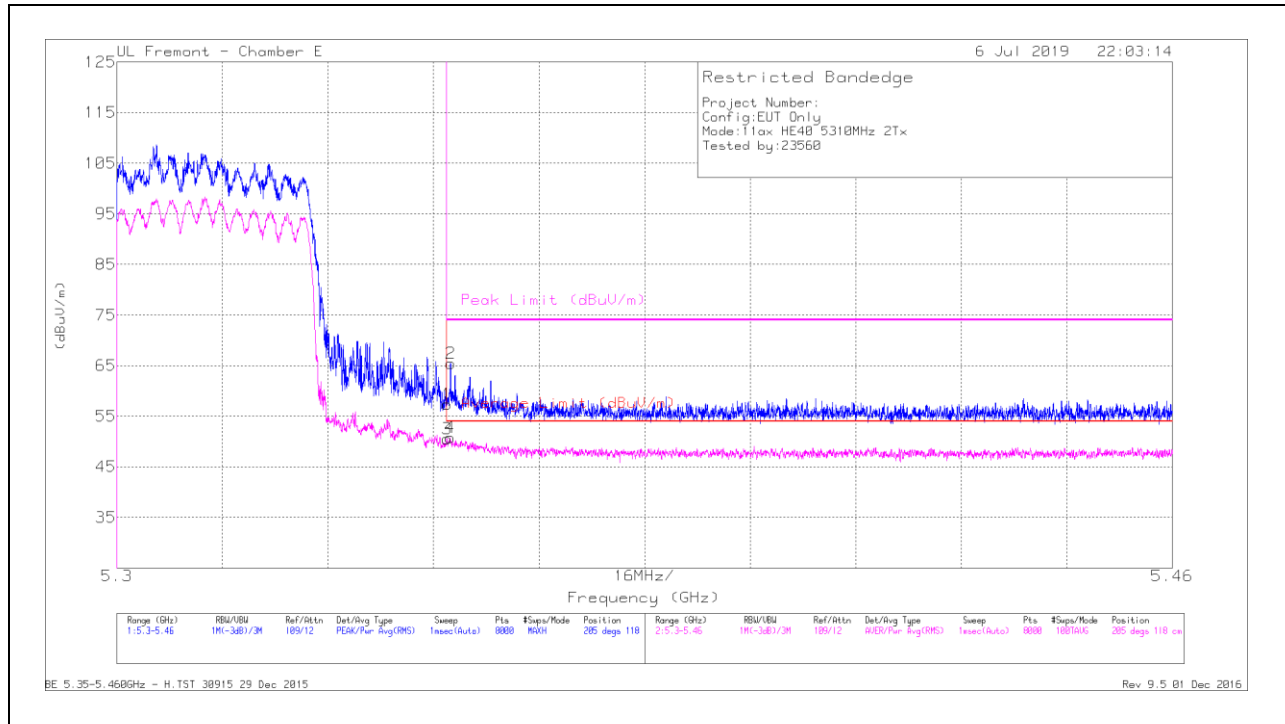


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.01	Pk	34.5	-17.1	57.41	-	-	74	-16.59	205	118	H
3	* 5.35	33.13	RMS	34.5	-17.1	50.53	54	-3.47	-	-	205	118	H
2	* 5.351	48.05	PK	34.5	-17.1	65.45	-	-	74	-8.55	205	118	H
4	* 5.351	33.38	RMS	34.5	-17.1	50.78	54	-3.22	-	-	205	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

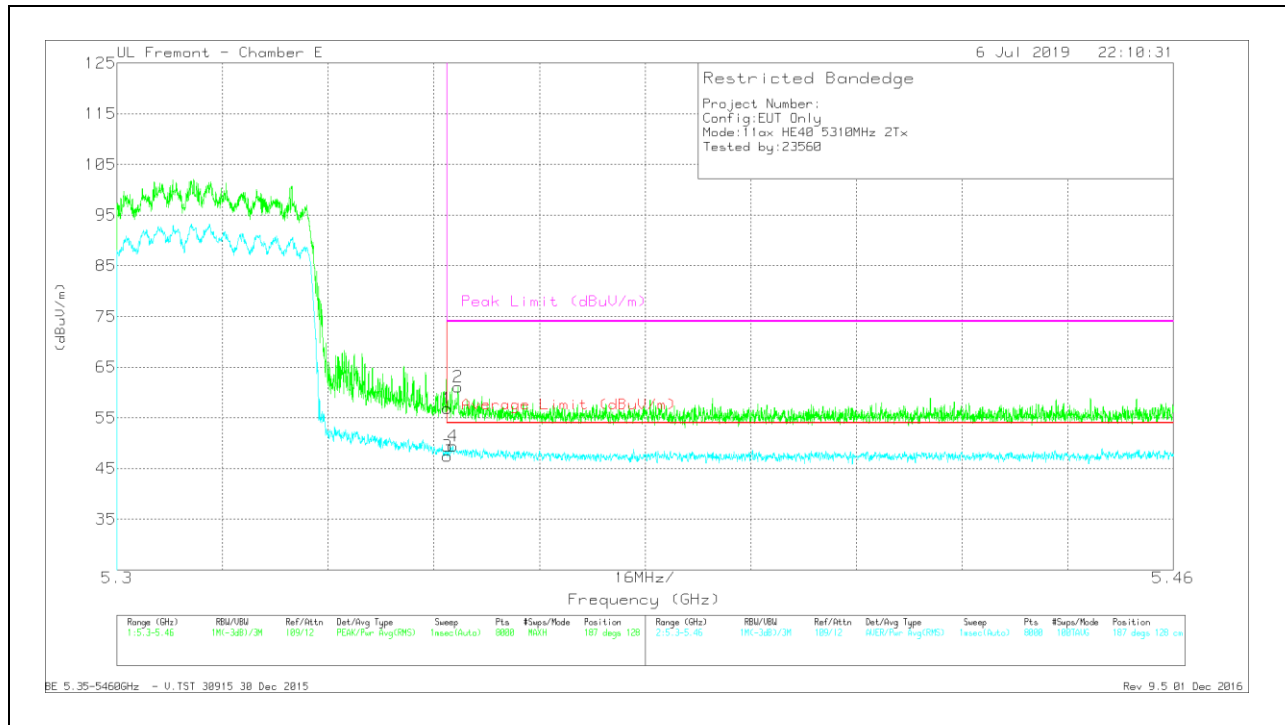

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.43	Pk	34.5	-17.1	56.83	-	-	74	-17.17	187	128	V
3	* 5.35	30.04	RMS	34.5	-17.1	47.44	54	-6.56	-	-	187	128	V
4	* 5.351	32.05	RMS	34.5	-17.1	49.45	54	-4.55	-	-	187	128	V
2	* 5.352	43.64	PK	34.5	-17.1	61.04	-	-	74	-12.96	187	128	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

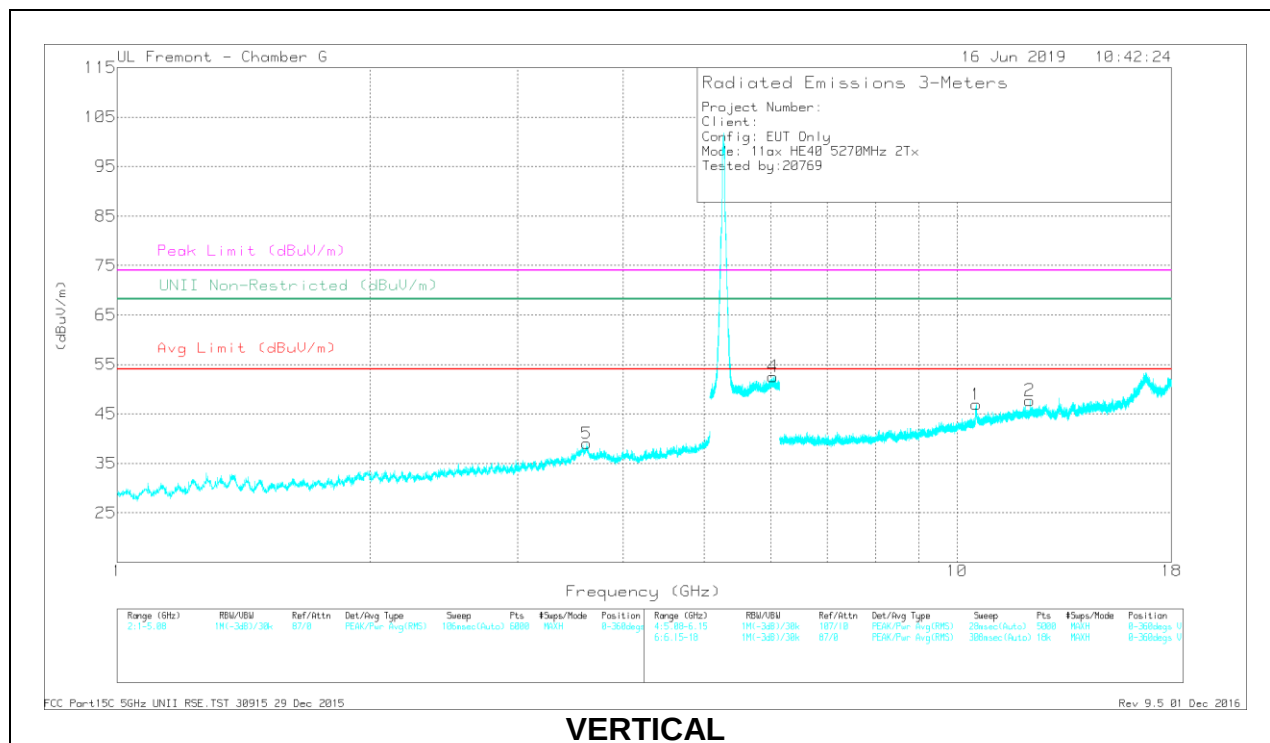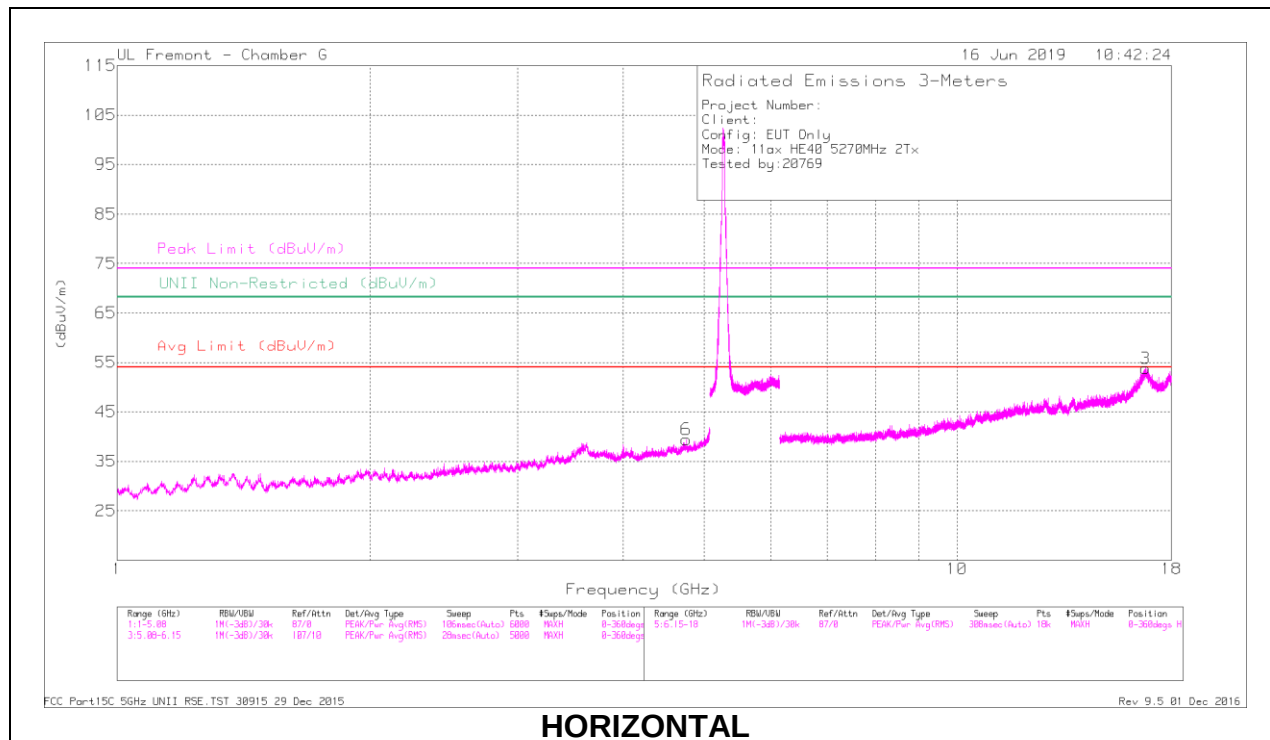

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 4.762	41.8	PK-U	34.2	-29.3	46.7	-	-	74	-27.3	-	-	69	169	H
	* 4.762	28.77	ADR	34.2	-29.3	33.67	54	-20.33	-	-	-	-	69	169	H
5	* 3.622	40.22	PK-U	35.6	-30.3	45.52	-	-	74	-28.48	-	-	271	298	V
	* 3.624	28.95	ADR	35.5	-30.3	34.15	54	-19.85	-	-	-	-	271	298	V
2	* 12.208	36.53	PK-U	39.5	-22.6	53.43	-	-	74	-20.57	-	-	133	185	V
	* 12.208	24.52	ADR	39.5	-22.6	41.42	54	-12.58	-	-	-	-	133	185	V
4	6.039	43.98	PK-U	35.7	-20.1	59.58	-	-	-	-	68.2	-8.62	321	186	V
1	10.545	40.31	PK-U	38	-23.7	54.61	-	-	-	-	68.2	-13.59	309	101	V
3	16.779	36.55	PK-U	41.7	-16.9	61.35	-	-	-	-	68.2	-6.85	76	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

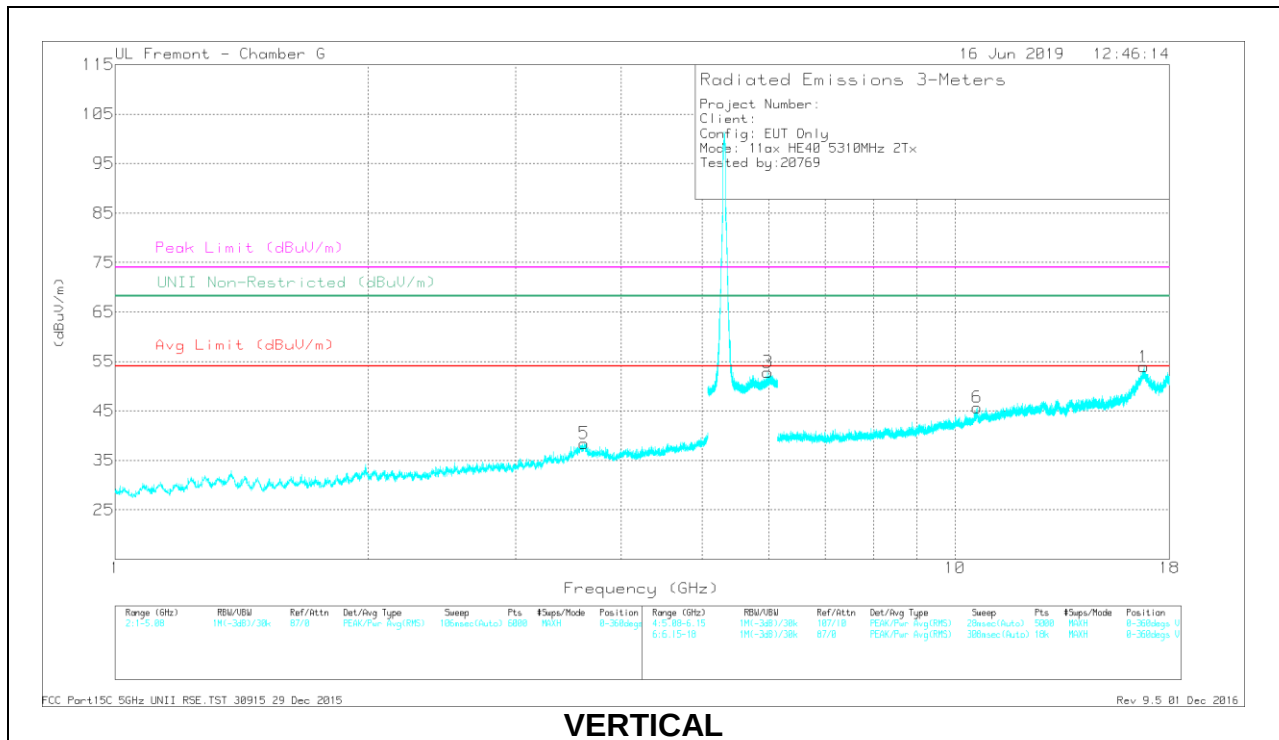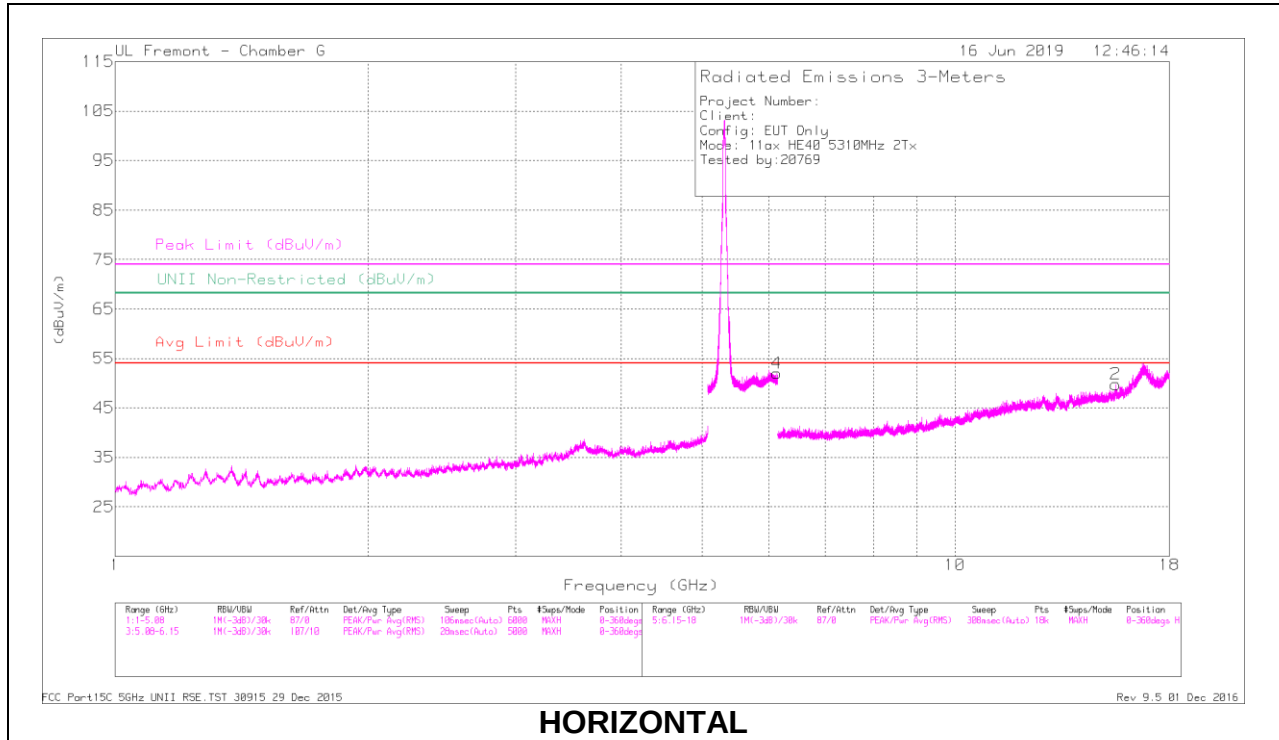

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 3.617	40.24	PK-U	35.6	-30.3	45.54	-	-	74	-28.46	-	-	328	190	V
	* 3.617	28.4	ADR	35.7	-30.3	33.8	54	-20.2	-	-	-	-	328	190	V
2	* 15.537	37.31	PK-U	40.9	-22.4	55.81	-	-	74	-18.19	-	-	35	207	H
	* 15.537	25.76	ADR	40.9	-22.5	44.16	54	-9.84	-	-	-	-	35	207	H
6	* 10.622	38.81	PK-U	38.2	-24	53.01	-	-	74	-20.99	-	-	123	144	V
	* 10.62	26.93	ADR	38.2	-23.9	41.23	54	-12.77	-	-	-	-	123	144	V
3	5.984	43.26	PK-U	35.5	-20	58.76	-	-	-	-	68.2	-9.44	8	208	V
4	6.136	43.39	PK-U	35.7	-19.9	59.19	-	-	-	-	68.2	-9.01	267	332	H
1	16.783	36.1	PK-U	41.8	-16.9	61	-	-	-	-	68.2	-7.2	115	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

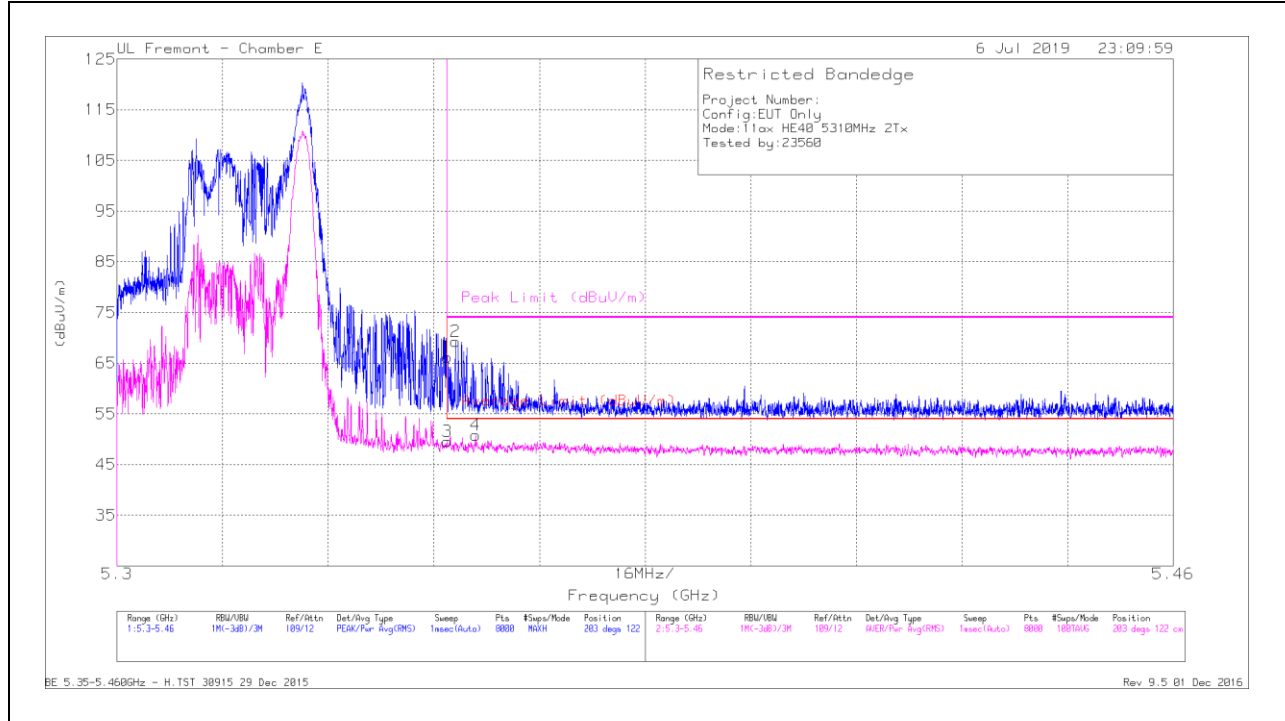


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/CbI/Fitr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.75	Pk	34.5	-17.1	66.15	-	-	74	-7.85	203	122	H
3	* 5.35	32.09	RMS	34.5	-17.1	49.49	54	-4.51	-	-	203	122	H
2	* 5.351	51.9	PK	34.5	-17.1	69.3	-	-	74	-4.7	203	122	H
4	* 5.354	33.36	RMS	34.5	-17.1	50.76	54	-3.24	-	-	203	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

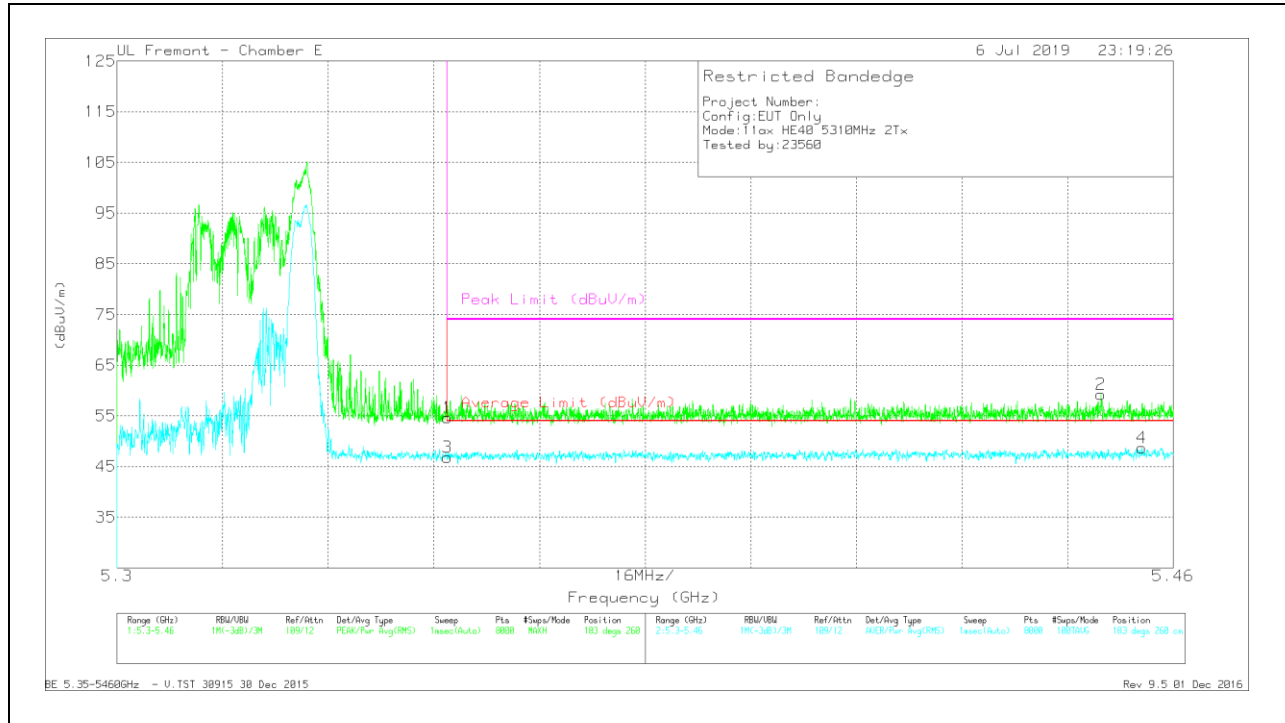

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.28	Pk	34.5	-17.1	54.68	-	-	74	-19.32	183	260	V
3	* 5.35	29.37	RMS	34.5	-17.1	46.77	54	-7.23	-	-	183	260	V
2	* 5.449	41.97	Pk	34.5	-17.2	59.27	-	-	74	-14.73	183	260	V
4	* 5.455	31.37	RMS	34.6	-17.3	48.67	54	-5.33	-	-	183	260	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

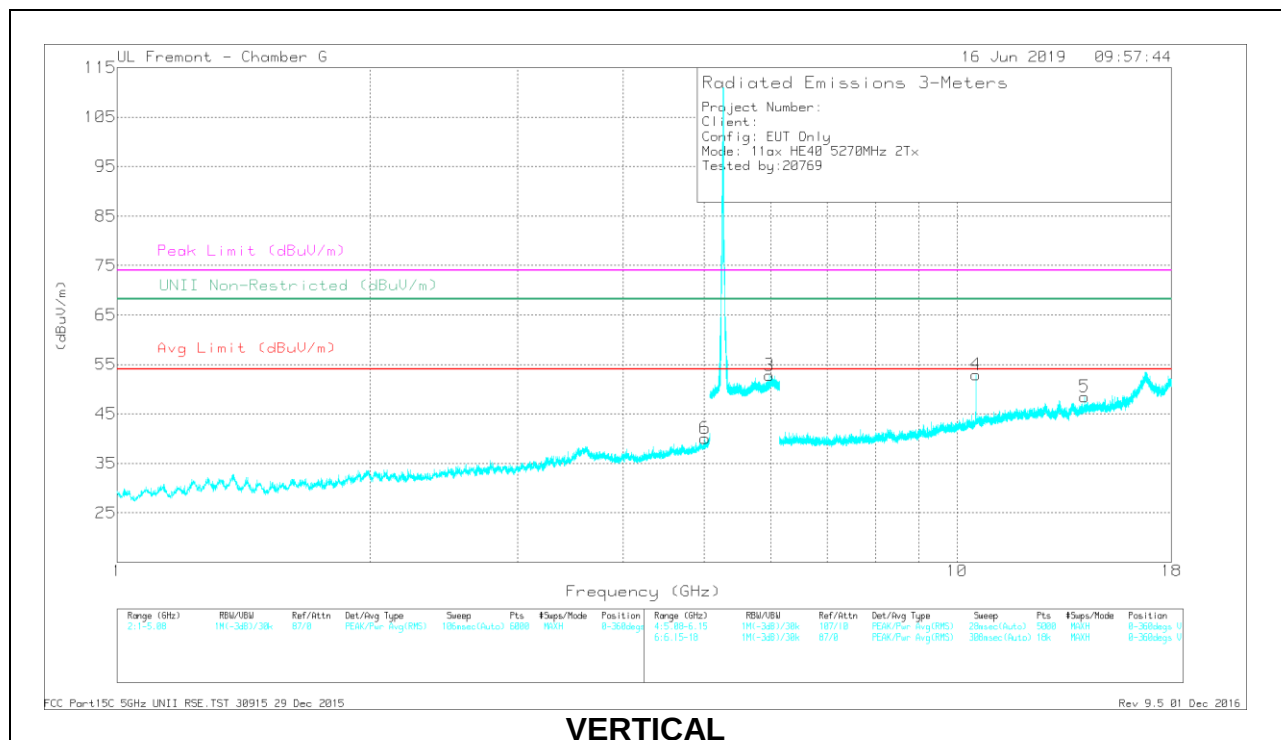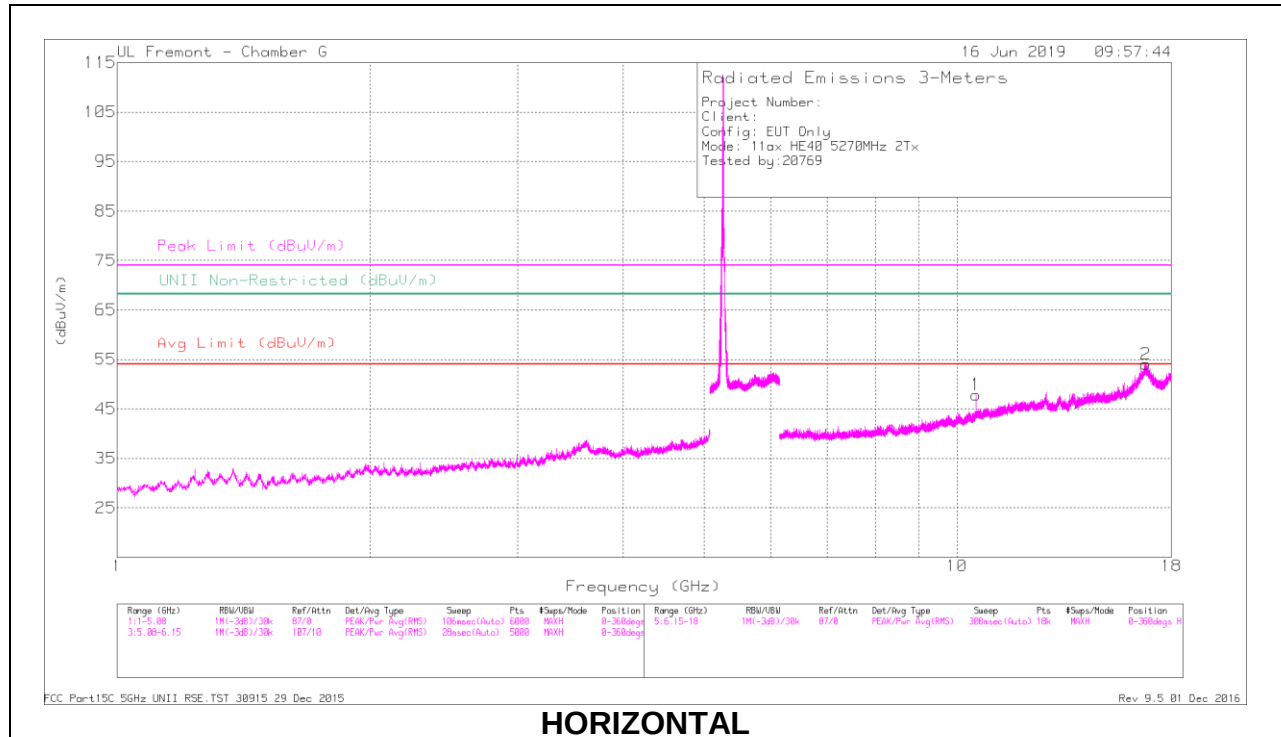

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.01	40.72	PK-U	34.2	-28.7	46.22	-	-	74	-27.78	-	-	268	126	V
	* 5.012	28.94	ADR	34.2	-28.7	34.44	54	-19.56	-	-	-	-	268	126	V
3	5.977	43.59	PK-U	35.5	-20	59.09	-	-	-	-	68.2	-9.11	16	293	V
1	10.537	40.72	PK-U	38	-23.7	55.02	-	-	-	-	68.2	-13.18	143	102	H
4	10.539	46.26	PK-U	38	-23.7	60.56	-	-	-	-	68.2	-7.64	314	111	V
5	14.191	38.34	PK-U	39.8	-23.2	54.94	-	-	-	-	68.2	-13.26	317	196	V
2	16.784	36.38	PK-U	41.7	-16.9	61.18	-	-	-	-	68.2	-7.02	75	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

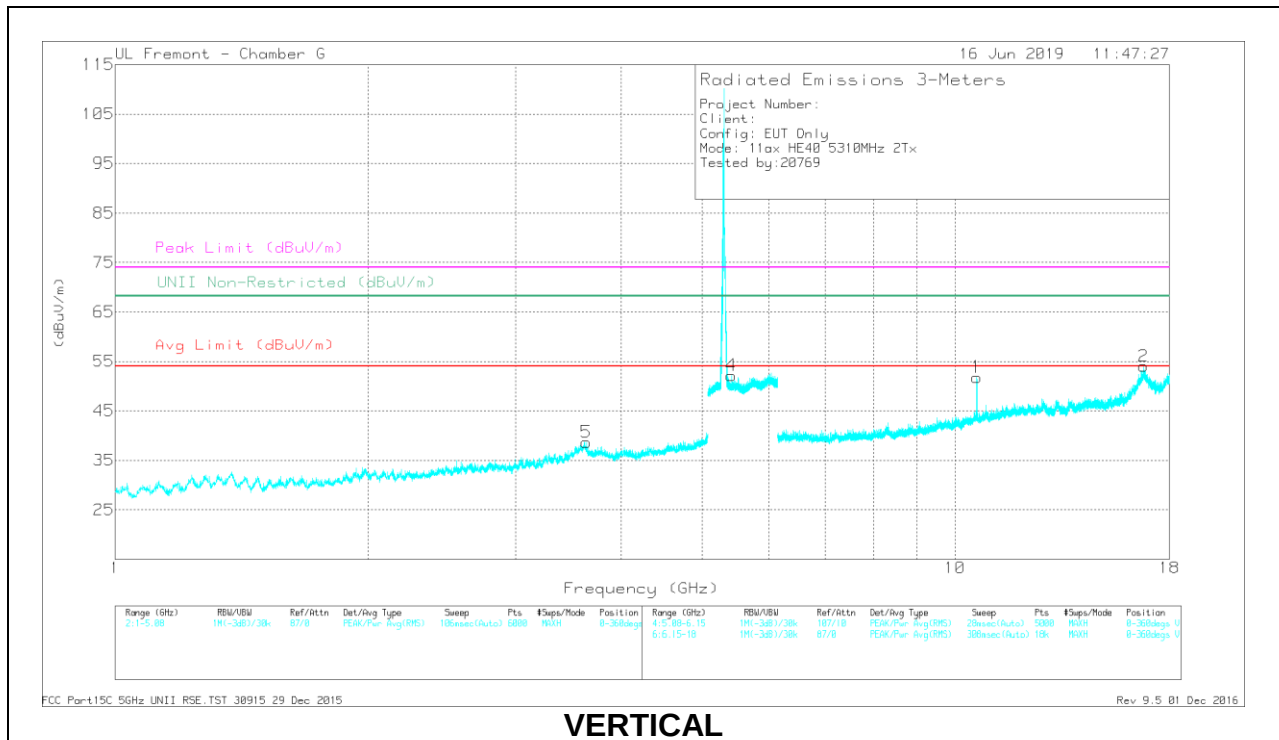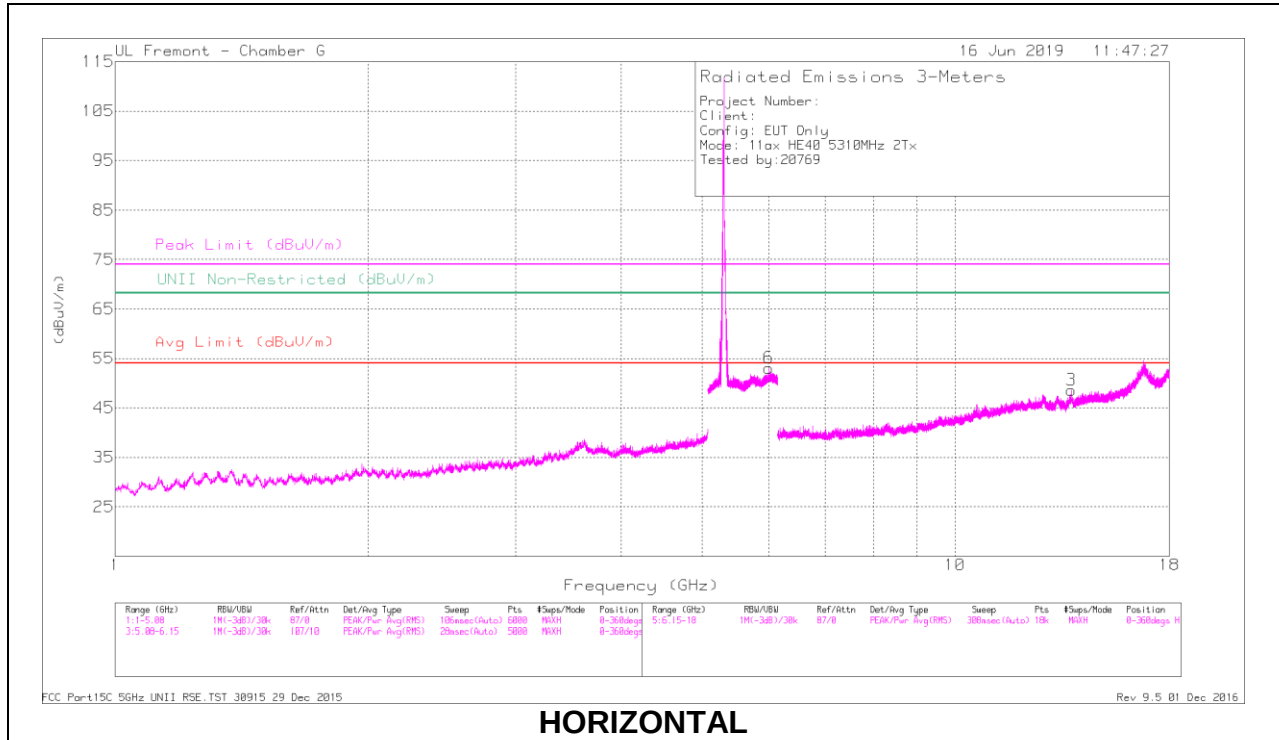

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 3.638	40.43	PK-U	34.7	-30.1	45.03	-	-	74	-28.97	-	-	10	262	V
	* 3.638	28.92	ADR	34.7	-30.1	33.52	54	-20.48	-	-	-	-	10	262	V
4	* 5.417	43.72	PK-U	34.7	-20.1	58.32	-	-	74	-15.68	-	-	264	130	V
	* 5.416	31.84	ADR	34.7	-20.1	46.44	54	-7.56	-	-	-	-	264	130	V
1	* 10.616	44.96	PK-U	38.1	-23.9	59.16	-	-	74	-14.84	-	-	135	123	V
	* 10.617	35.18	ADR	38.1	-23.9	49.38	54	-4.62	-	-	-	-	135	123	V
6	6.001	43.52	PK-U	35.5	-19.8	59.22	-	-	-	-	68.2	-8.98	63	208	H
3	13.76	38.17	PK-U	39.5	-22.2	55.47	-	-	-	-	68.2	-12.73	261	186	H
2	16.778	35.97	PK-U	41.7	-16.9	60.77	-	-	-	-	68.2	-7.43	116	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.12. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3 GHz BAND


1TX Antenna 6 MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

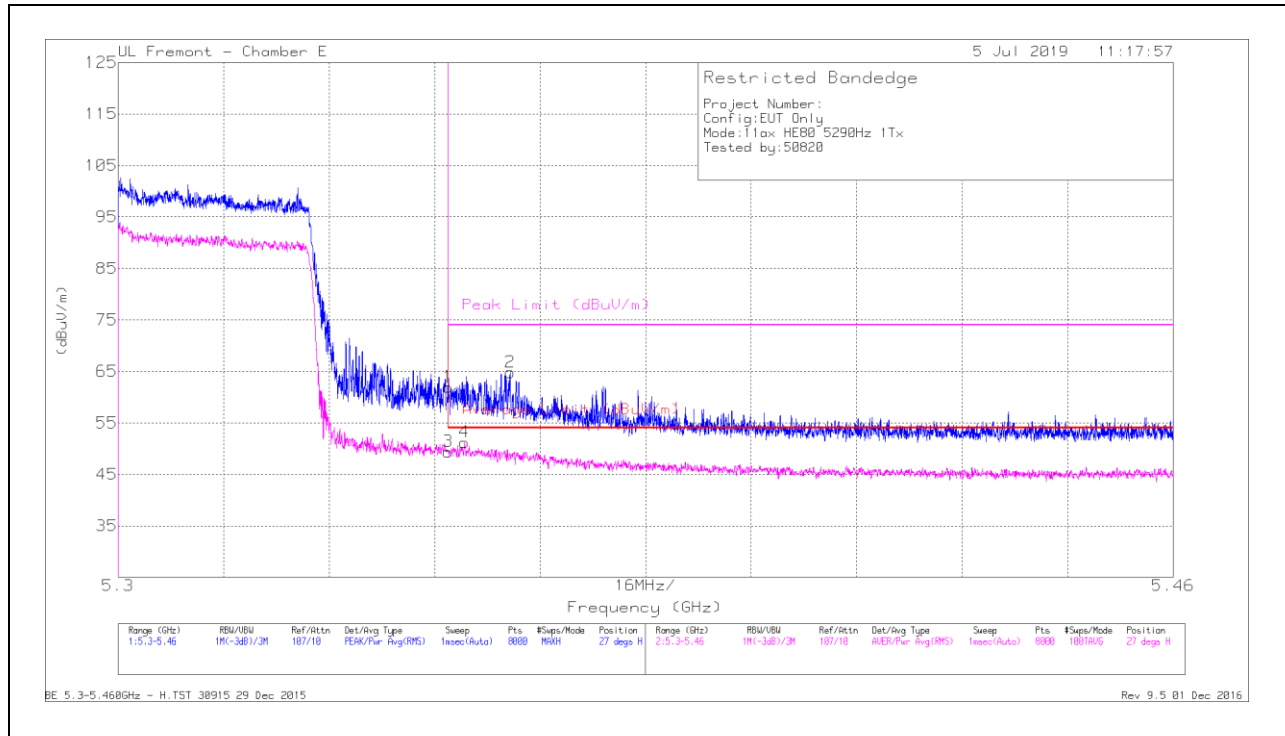

VERTICAL RESULT

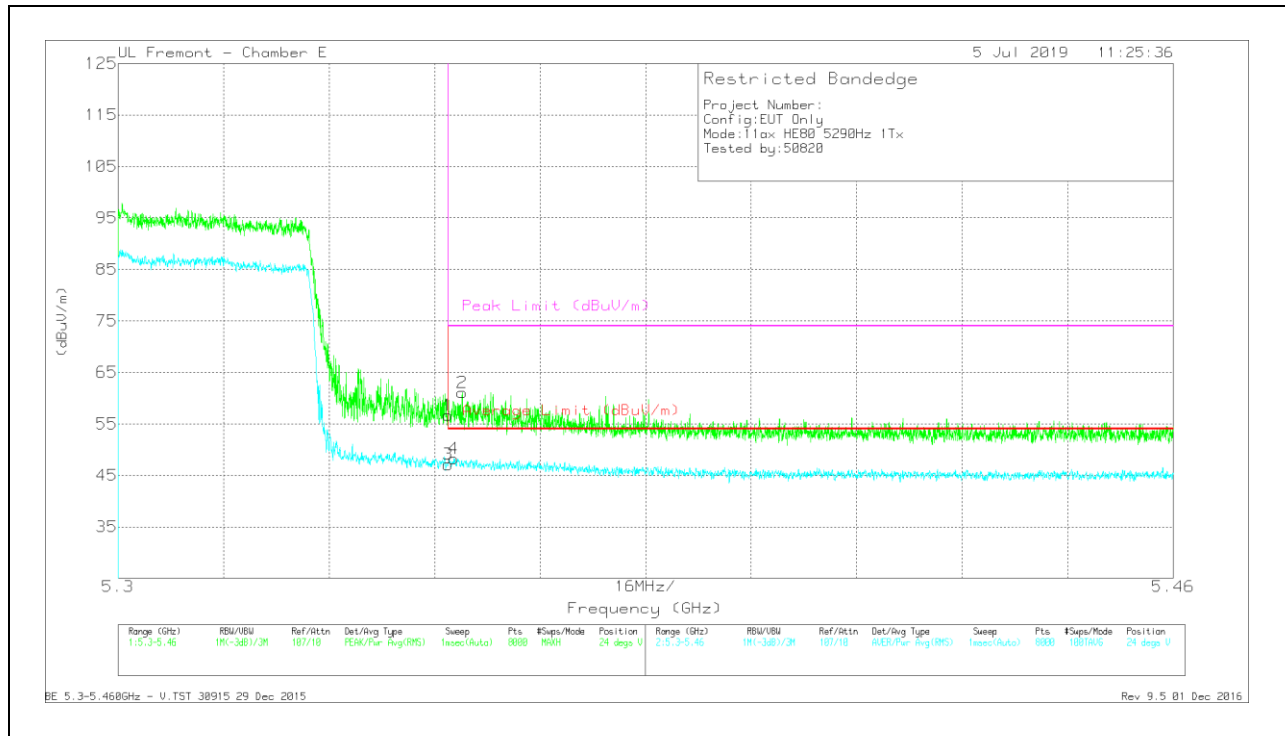

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.57	Pk	34.5	-21.4	56.67	-	-	74	-17.33	24	108	V
3	* 5.35	34	RMS	34.5	-21.4	47.1	54	-6.9	-	-	24	108	V
4	* 5.351	35.12	RMS	34.5	-21.4	48.22	54	-5.78	-	-	24	108	V
2	* 5.352	47.96	Pk	34.5	-21.4	61.06	-	-	74	-12.94	24	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

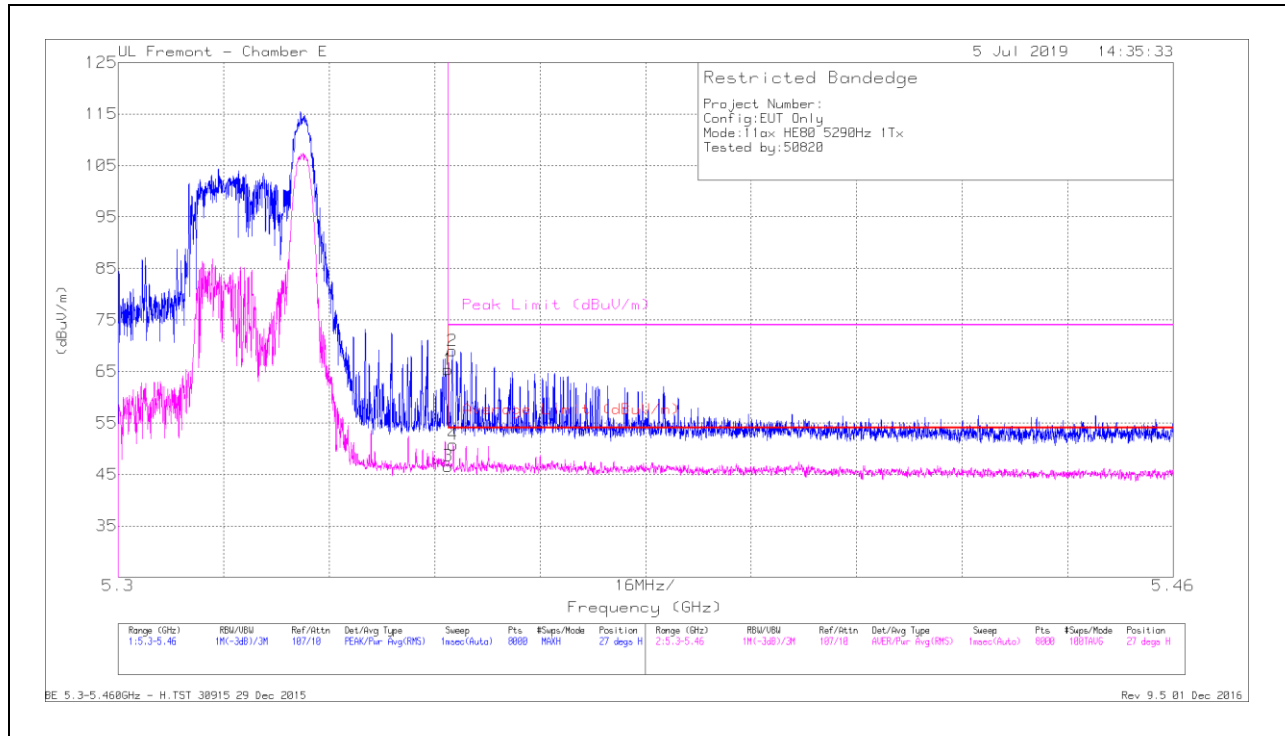


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	52.25	Pk	34.5	-21.4	65.35	-	-	74	-8.65	27	176	H
3	* 5.35	33.5	RMS	34.5	-21.4	46.6	54	-7.4	-	-	27	176	H
2	* 5.351	55.93	Pk	34.5	-21.4	69.03	-	-	74	-4.97	27	176	H
4	* 5.351	37.67	RMS	34.5	-21.4	50.77	54	-3.23	-	-	27	176	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

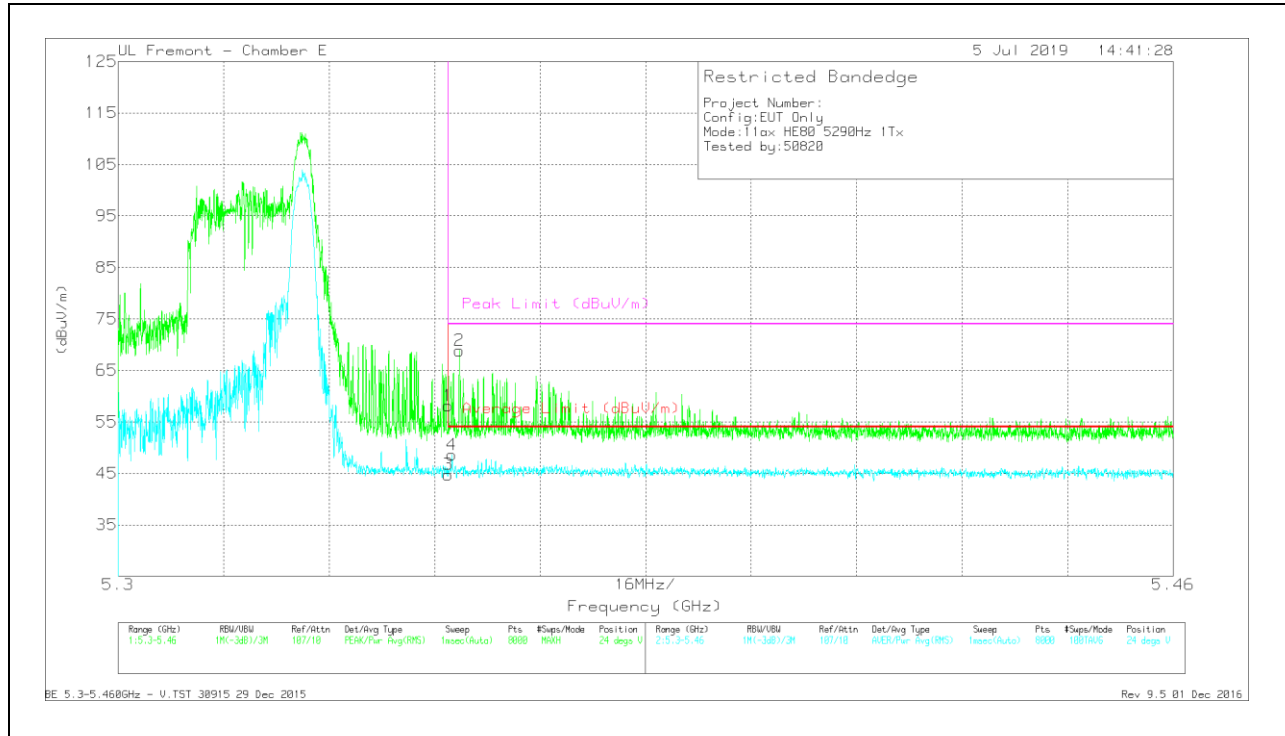

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.02	PK	34.5	-21.4	58.12	-	-	74	-15.88	24	108	V
3	* 5.35	31.67	RMS	34.5	-21.4	44.77	54	-9.23	-	-	24	108	V
4	* 5.351	35.5	RMS	34.5	-21.4	48.6	54	-5.4	-	-	24	108	V
2	* 5.352	55.76	PK	34.5	-21.4	68.86	-	-	74	-5.14	24	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

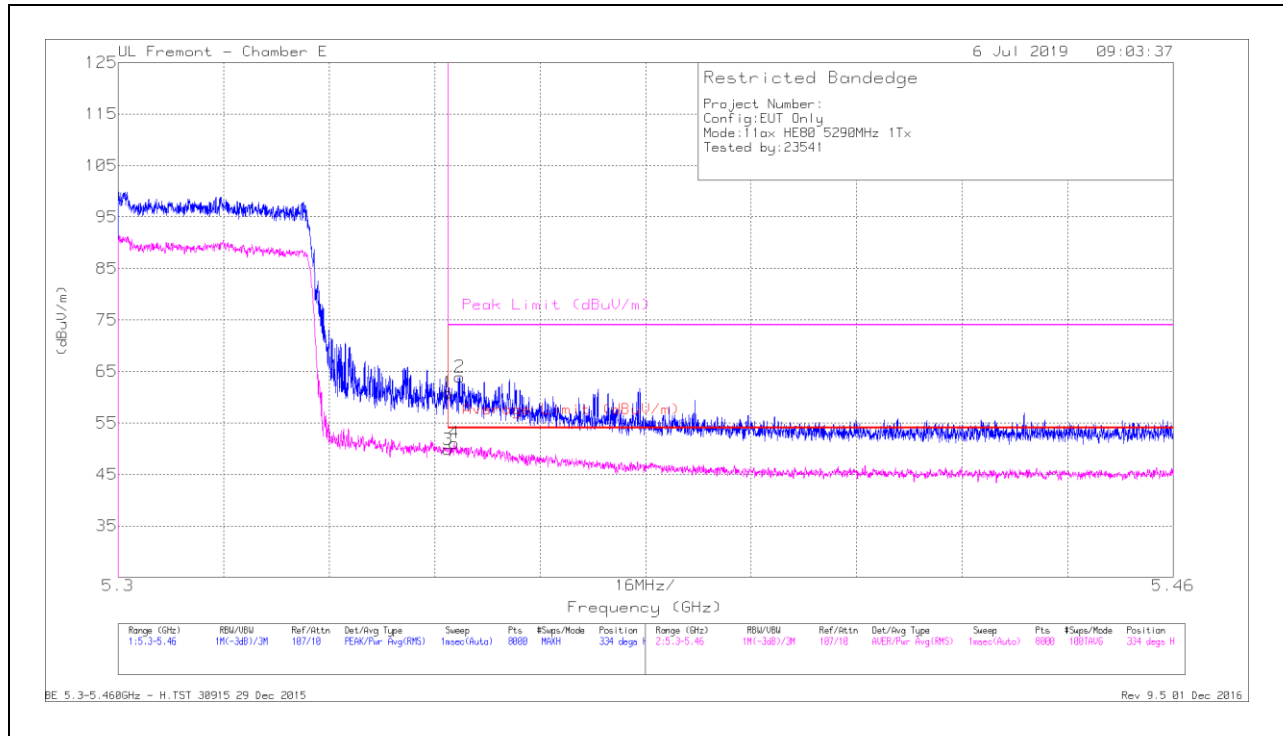


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.79	Pk	34.5	-21.4	60.89	-	-	74	-13.11	334	216	H
3	* 5.35	36.72	RMS	34.5	-21.4	49.82	54	-4.18	-	-	334	216	H
4	* 5.351	38.02	RMS	34.5	-21.4	51.12	54	-2.88	-	-	334	216	H
2	* 5.352	50.82	Pk	34.5	-21.4	63.92	-	-	74	-10.08	334	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

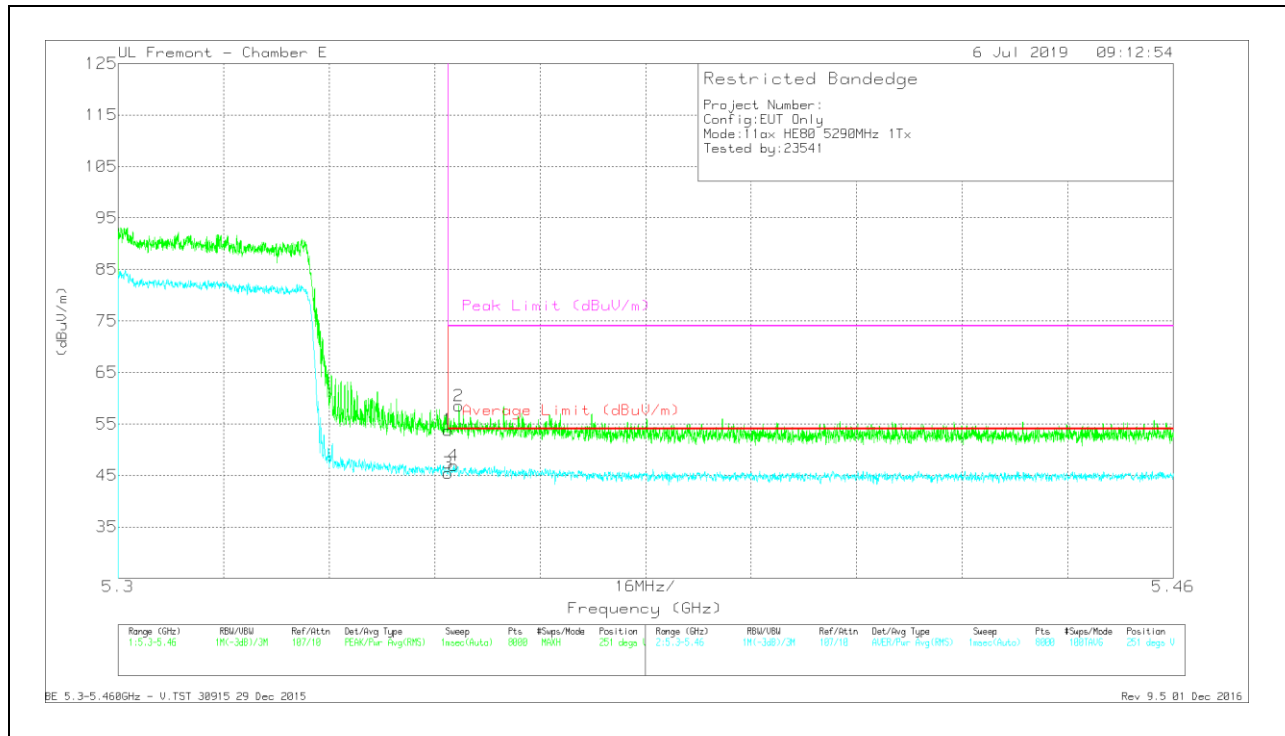

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.71	Pk	34.5	-21.4	53.81	-	-	74	-20.19	251	120	V
3	* 5.35	32.33	RMS	34.5	-21.4	45.43	54	-8.57	-	-	251	120	V
4	* 5.351	33.8	RMS	34.5	-21.4	46.9	54	-7.1	-	-	251	120	V
2	* 5.352	45.39	Pk	34.5	-21.4	58.49	-	-	74	-15.51	251	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

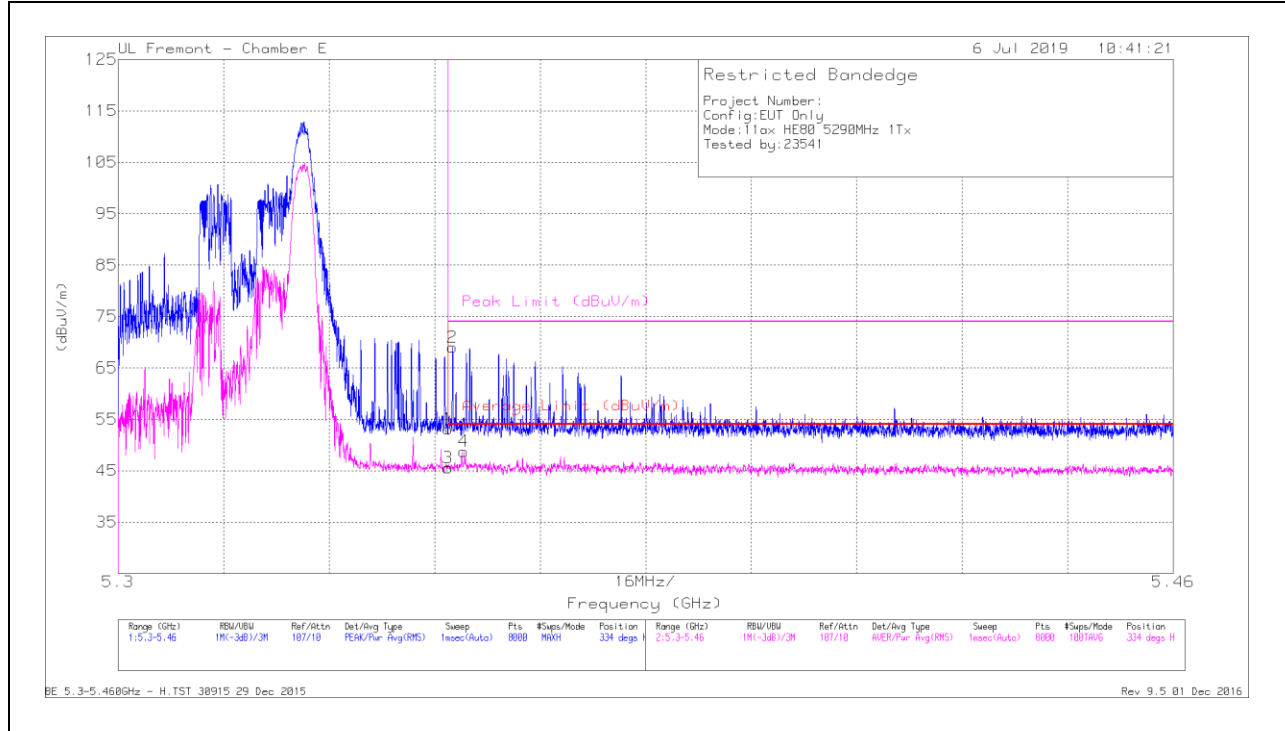


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.04	Pk	34.5	-21.4	53.14	-	-	74	-20.86	334	216	H
3	* 5.35	32.43	RMS	34.5	-21.4	45.53	54	-8.47	-	-	334	216	H
2	* 5.351	55.91	Pk	34.5	-21.4	69.01	-	-	74	-4.99	334	216	H
4	* 5.352	35.67	RMS	34.5	-21.4	48.77	54	-5.23	-	-	334	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

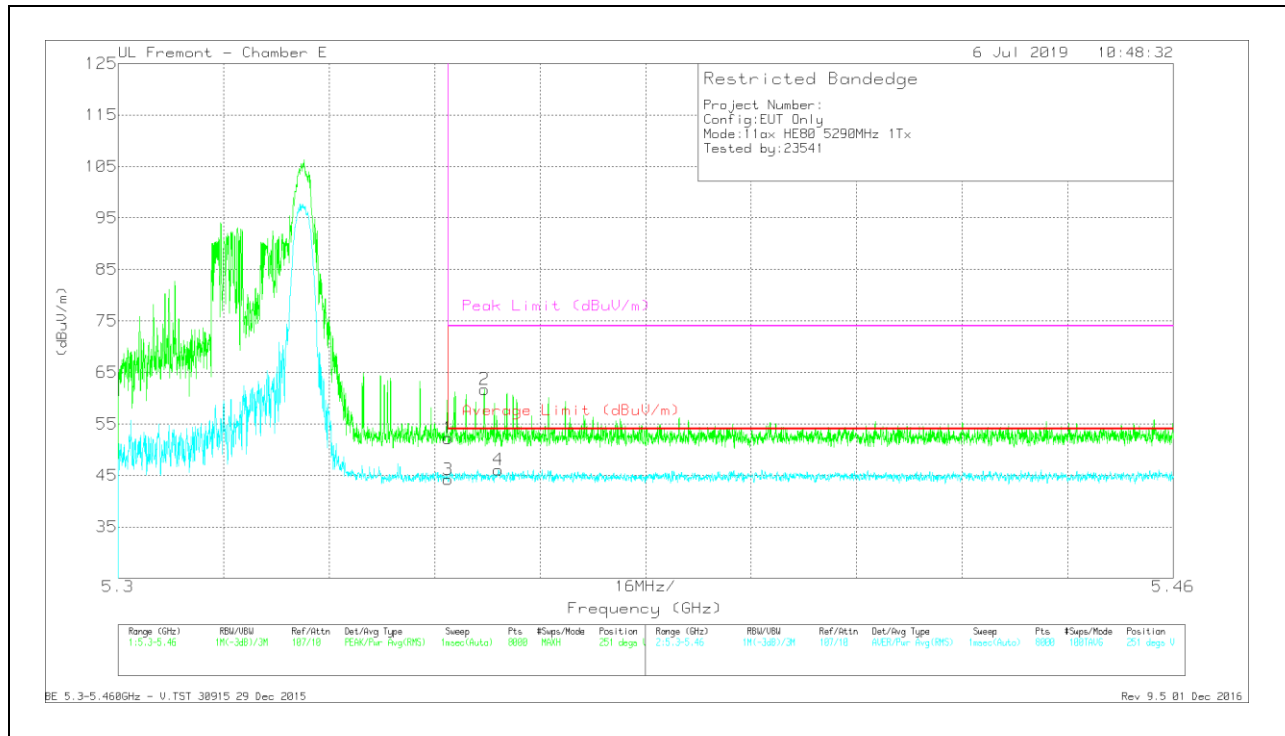

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.14	Pk	34.5	-21.4	52.24	-	-	74	-21.76	251	120	V
3	* 5.35	31.11	RMS	34.5	-21.4	44.21	54	-9.79	-	-	251	120	V
2	* 5.356	48.61	Pk	34.5	-21.4	61.71	-	-	74	-12.29	251	120	V
4	* 5.358	33	RMS	34.5	-21.4	46.1	54	-7.9	-	-	251	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

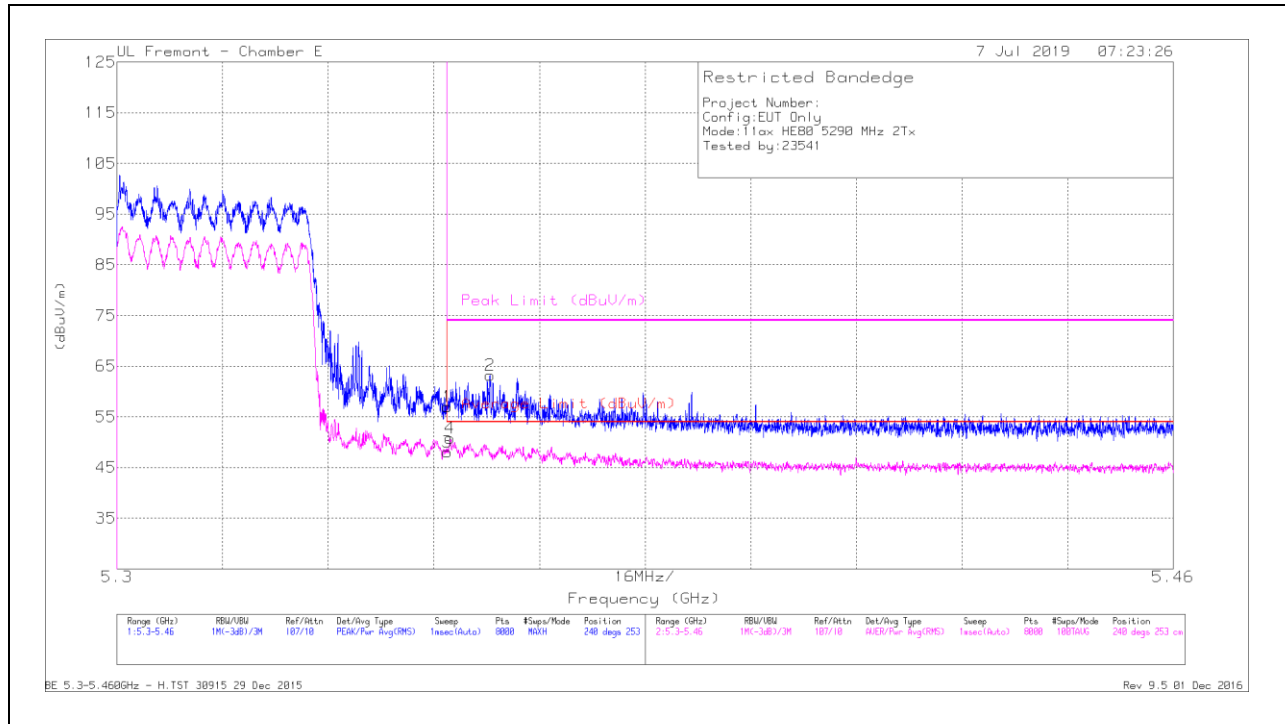

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.92	Pk	34.5	-21.4	57.02	-	-	74	-16.98	240	253	H
2	* 5.356	50.1	Pk	34.5	-21.4	63.2	-	-	74	-10.8	240	253	H
3	* 5.35	34.9	RMS	34.5	-21.4	48	54	-6	-	-	240	253	H
4	* 5.35	37.7	RMS	34.5	-21.4	50.8	54	-3.2	-	-	240	253	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection