


VERTICAL RESULT

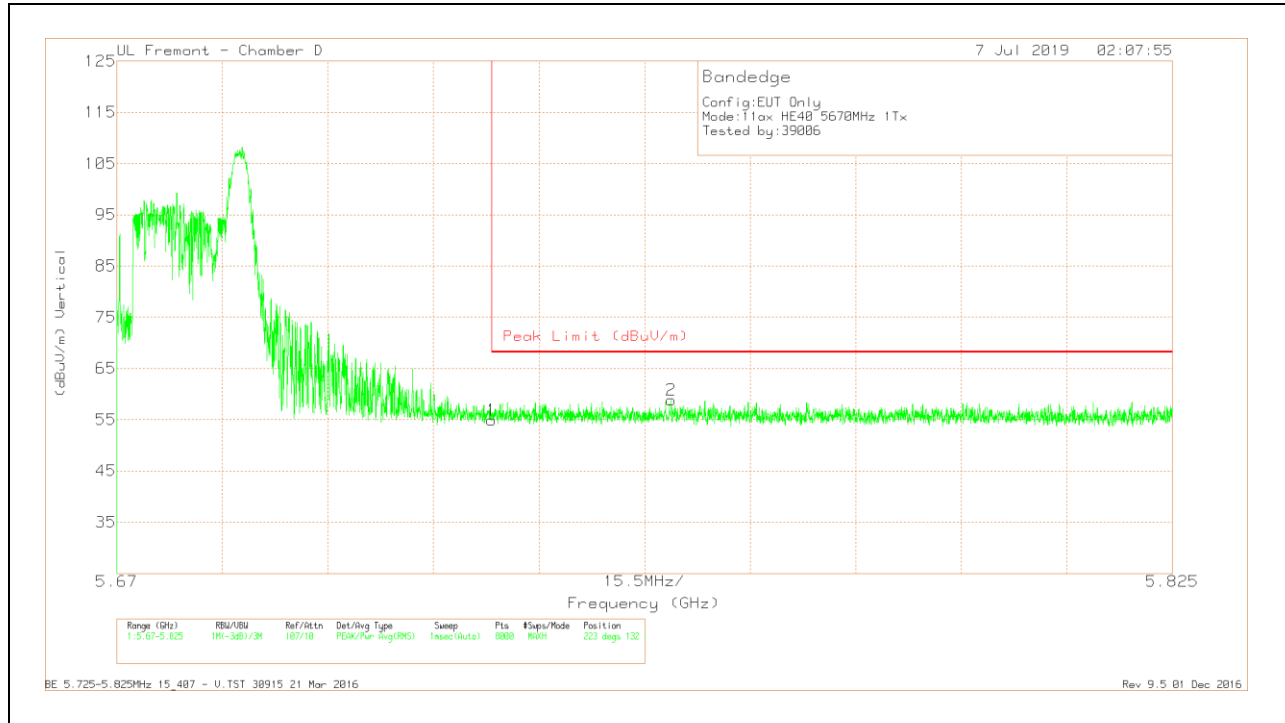


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.83	Pk	34.6	-17.5	54.93	68.2	-13.27	223	132	V
2	5.751	41.59	Pk	34.7	-17.4	58.89	68.2	-9.31	223	132	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

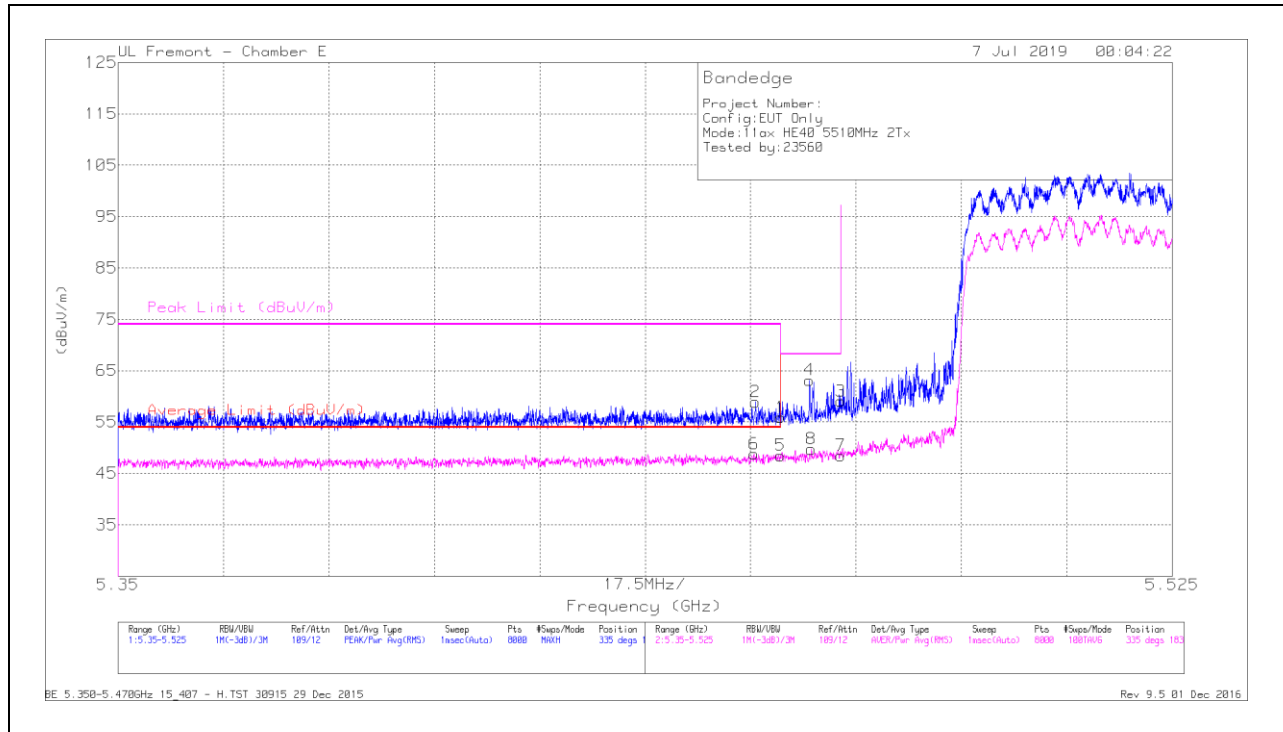


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.456	41.61	Pk	34.6	-17.3	58.91	-	-	74	-15.09	335	183	H
6	* 5.456	31.48	RMS	34.6	-17.3	48.78	54	-5.22	-	-	335	183	H
1	* 5.46	38.46	Pk	34.6	-17.2	55.86	-	-	74	-18.14	335	183	H
5	* 5.46	31.09	RMS	34.6	-17.2	48.49	54	-5.51	-	-	335	183	H
4	5.465	45.86	Pk	34.5	-17.2	63.16	-	-	68.2	-5.04	335	183	H
8	5.465	32.43	RMS	34.5	-17.2	49.73	-	-	-	-	335	183	H
3	5.47	41.67	Pk	34.6	-17.2	59.07	-	-	68.2	-9.13	335	183	H
7	5.47	31.08	RMS	34.6	-17.2	48.48	-	-	-	-	335	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

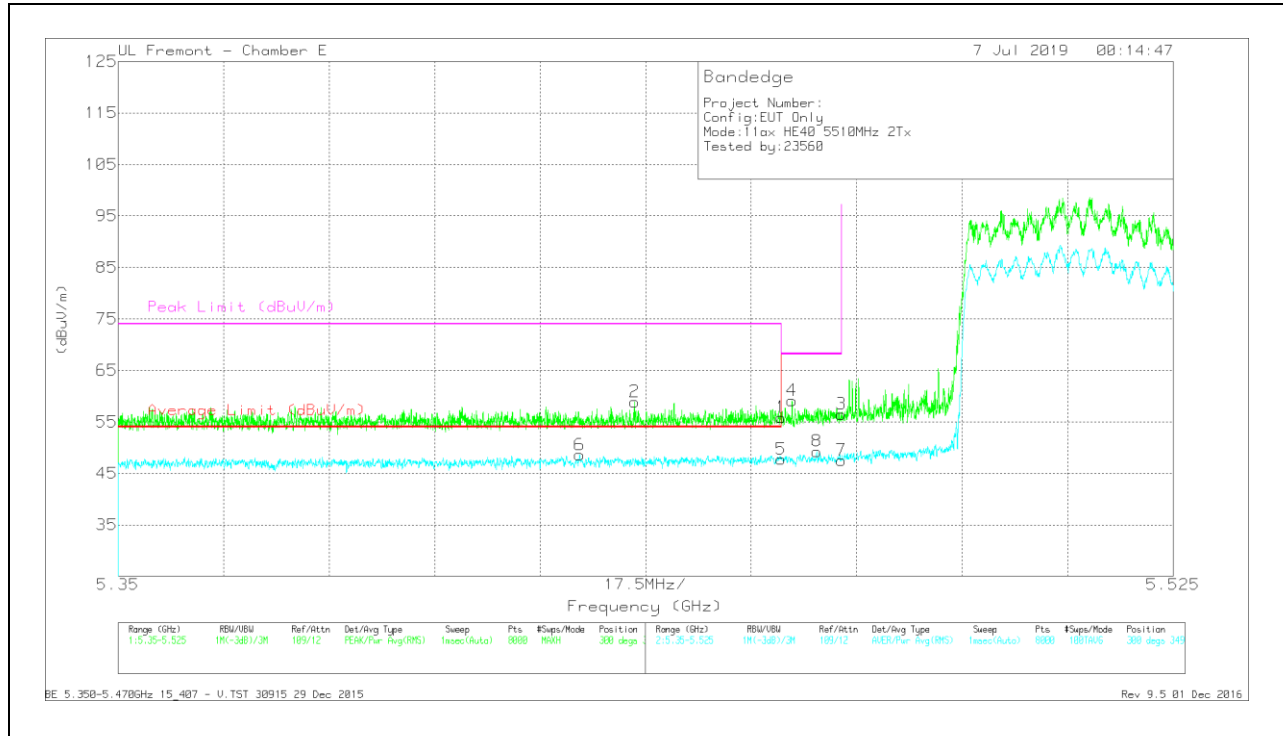

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.427	31.31	RMS	34.5	-17.2	48.61	54	-5.39	-	-	300	349	V
2	* 5.436	41.73	PK	34.5	-17.3	58.93	-	-	74	-15.07	300	349	V
1	* 5.46	38.46	PK	34.6	-17.2	55.86	-	-	74	-18.14	300	349	V
5	* 5.46	30.37	RMS	34.6	-17.2	47.77	54	-6.23	-	-	300	349	V
4	5.462	41.84	PK	34.5	-17.2	59.14	-	-	68.2	-9.06	300	349	V
8	5.466	31.99	RMS	34.5	-17.2	49.29	-	-	-	-	300	349	V
3	5.47	39.1	PK	34.6	-17.2	56.5	-	-	68.2	-11.7	300	349	V
7	5.47	30.14	RMS	34.6	-17.2	47.54	-	-	-	-	300	349	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

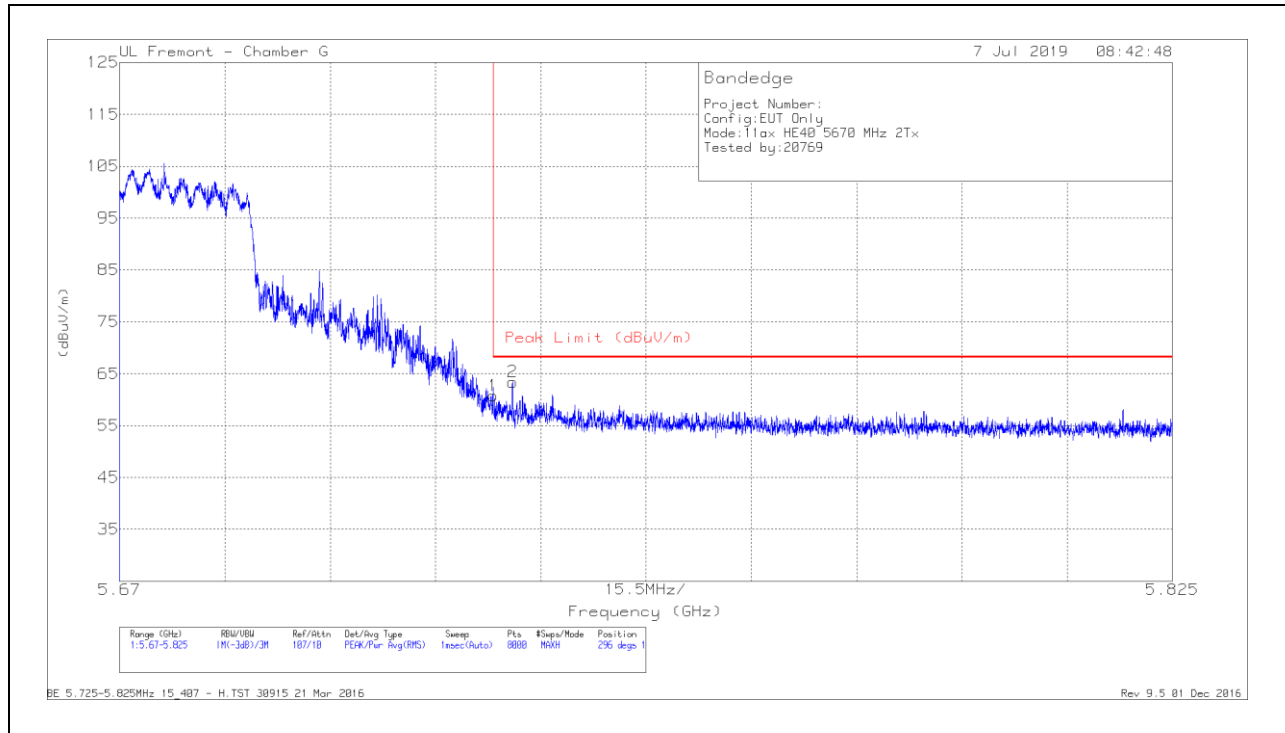

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.65	Pk	35.1	-20	60.75	68.2	-7.45	296	128	H
2	5.728	48.29	Pk	35.1	-20	63.39	68.2	-4.81	296	128	H

Pk - Peak detector

VERTICAL RESULT


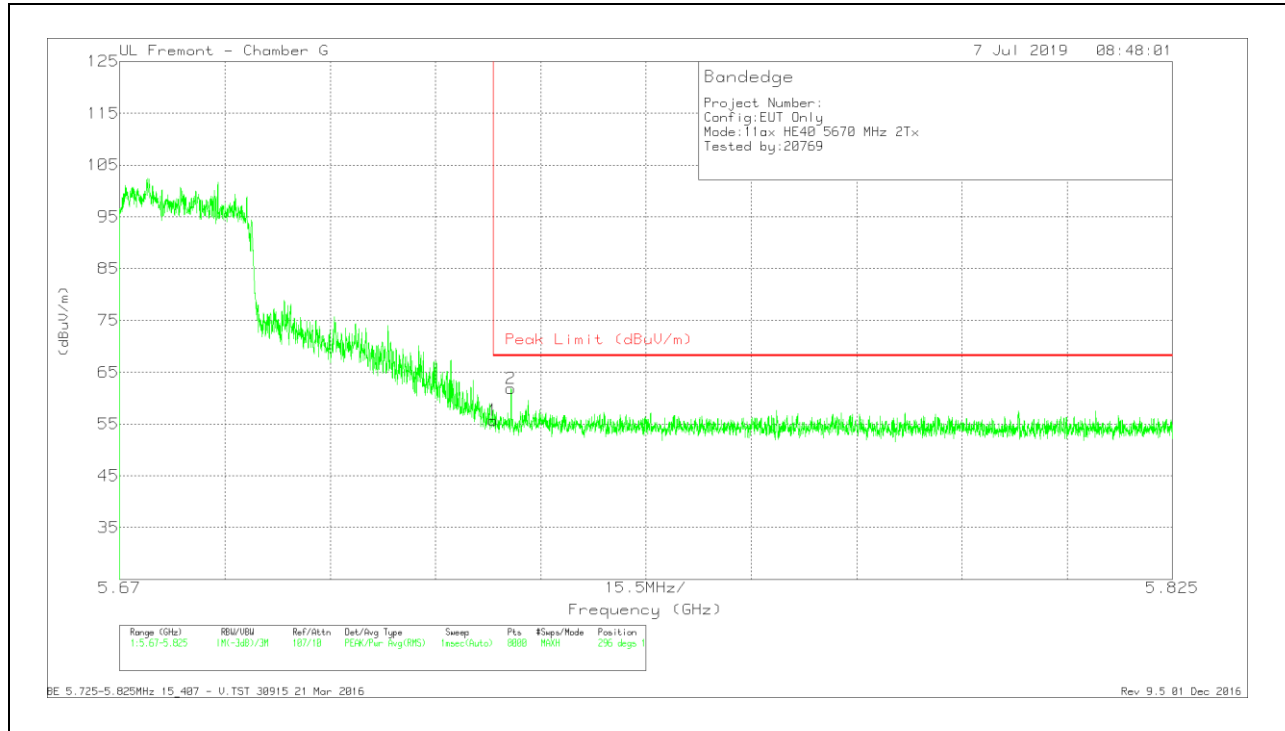


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.6	Pk	35.1	-20	55.7	68.2	-12.5	296	128	V
2	5.728	46.77	Pk	35.1	-20	61.87	68.2	-6.33	296	128	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

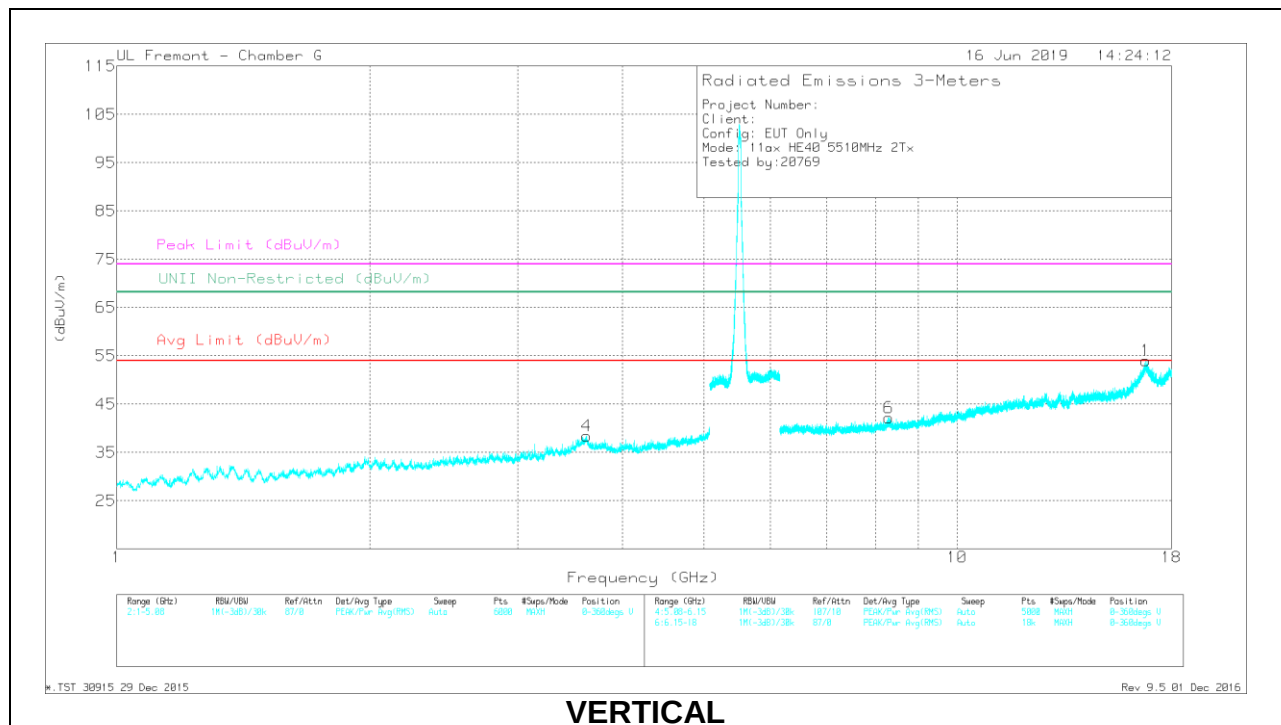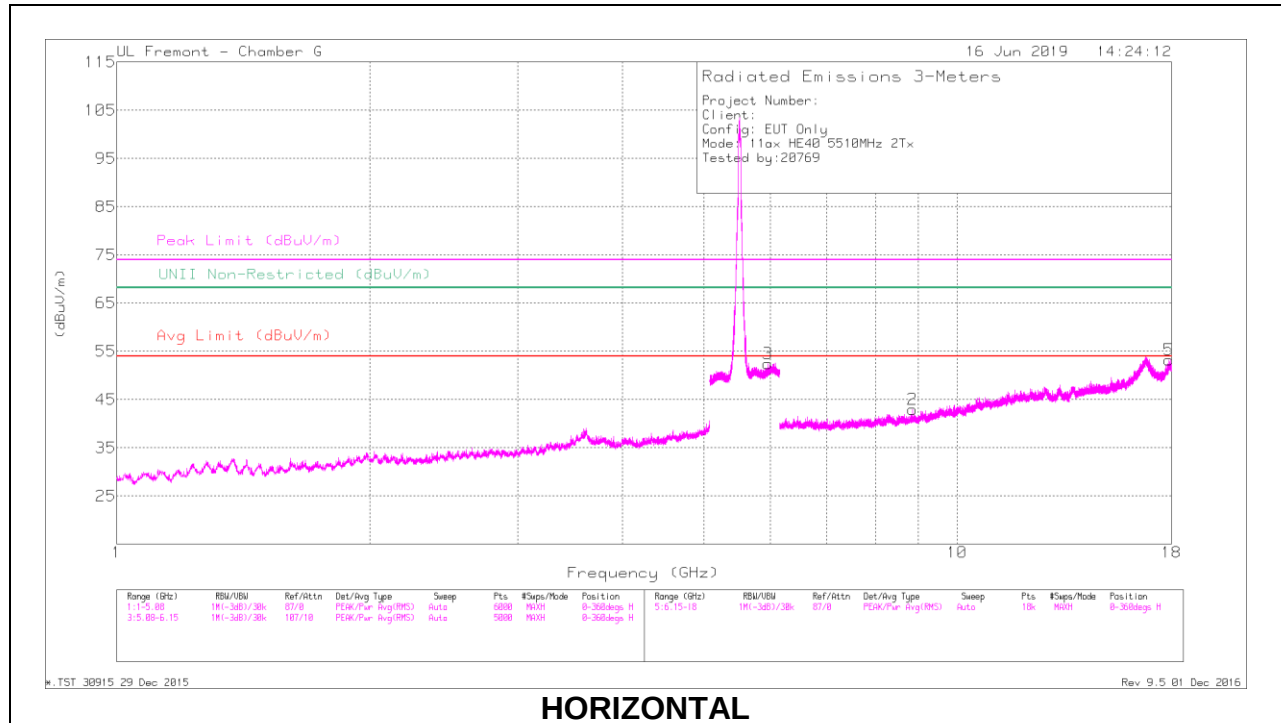

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 3.622	40.8	PK-U	35.7	-30.3	46.2	-	-	74	-27.8	-	-	66	245	V
	* 3.625	29.23	ADR	35.4	-30.3	34.33	54	-19.67	-	-	-	-	66	245	V
5	* 17.885	35.41	PK-U	42.5	-17.8	60.11	-	-	74	-13.89	-	-	293	147	H
	* 17.884	23.6	ADR	42.4	-17.9	48.1	54	-5.9	-	-	-	-	293	147	H
6	* 8.29	38.04	PK-U	36.1	-25.7	48.44	-	-	74	-25.56	-	-	109	234	V
	* 8.288	26.4	ADR	36.1	-25.7	36.8	54	-17.2	-	-	-	-	109	234	V
3	5.957	42.96	PK-U	35.6	-20.1	58.46	-	-	-	-	68.2	-9.74	336	293	H
2	8.853	37.8	PK-U	36.3	-25.7	48.4	-	-	-	-	68.2	-19.8	84	200	H
1	16.782	35.31	PK-U	41.7	-16.9	60.11	-	-	-	-	68.2	-8.09	72	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

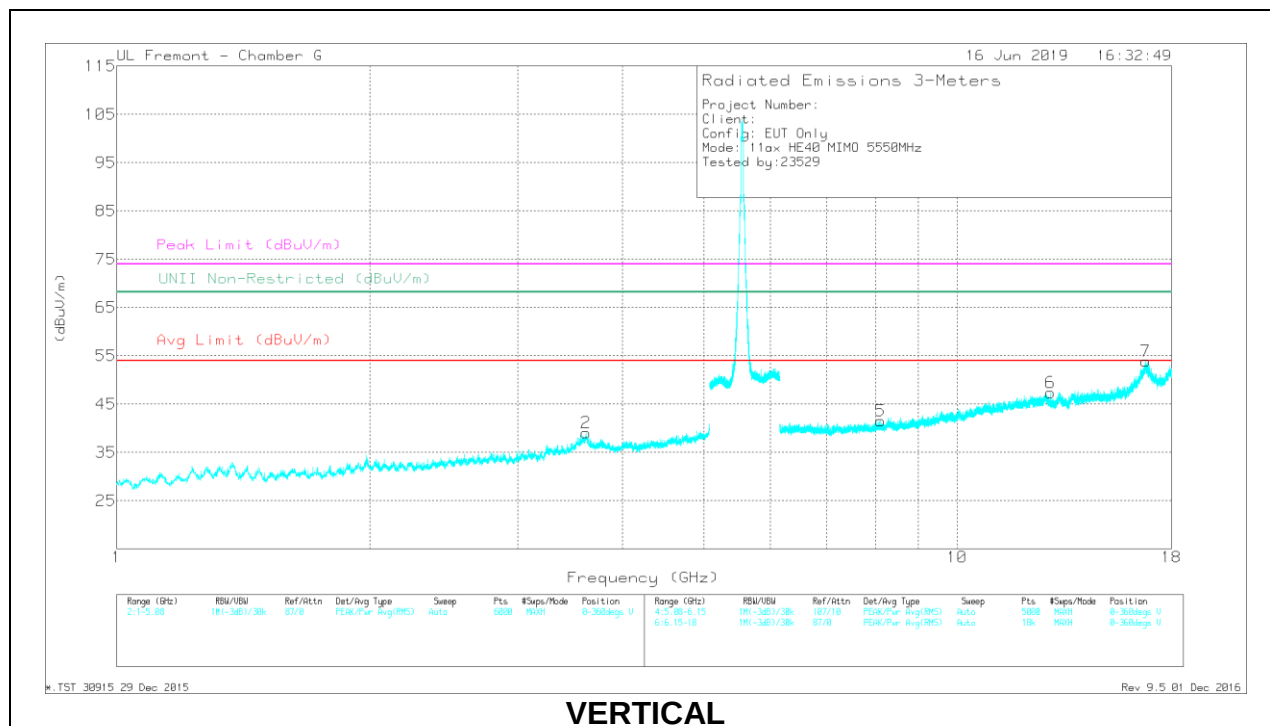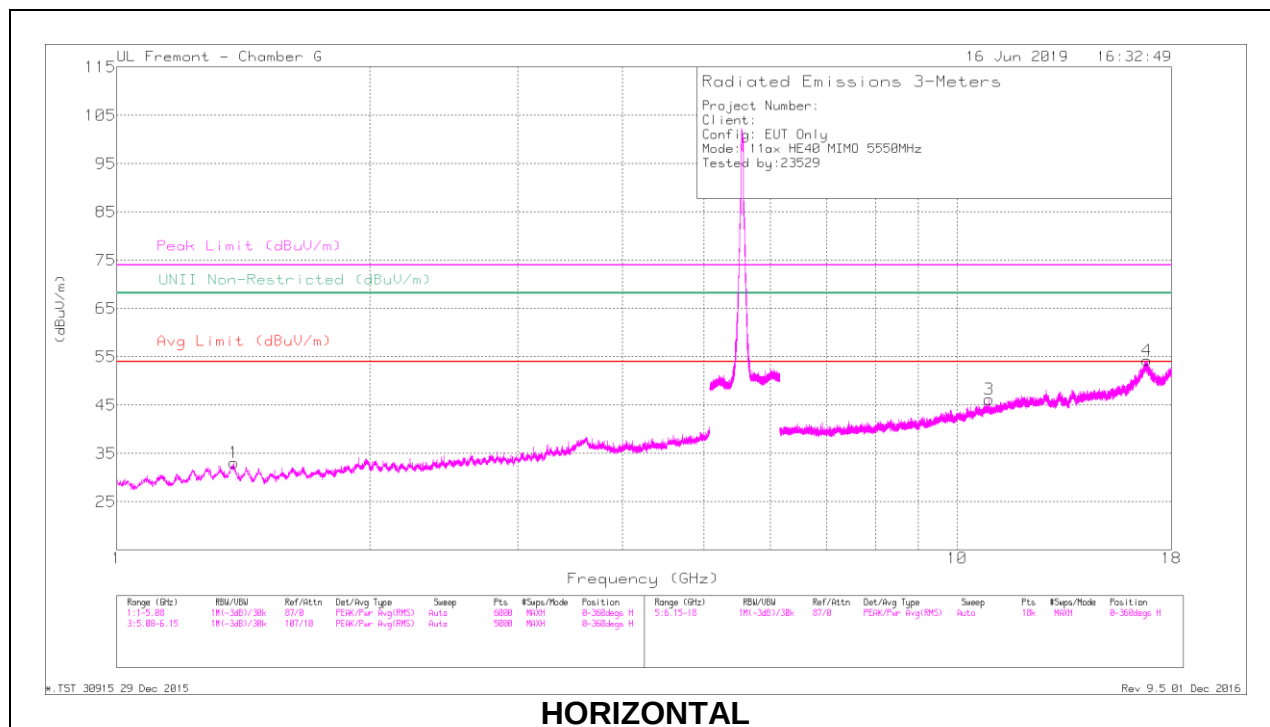

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.377	42.75	PK-U	29.6	-32.1	40.25	-	-	74	-33.75	-	-	56	128	H
	* 1.377	31.13	ADR	29.6	-32.1	28.63	54	-25.37	-	-	-	-	56	128	H
2	* 3.62	40.25	PK-U	35.7	-30.3	45.65	-	-	74	-28.35	-	-	212	202	V
	* 3.62	29.08	ADR	35.7	-30.3	34.48	54	-19.52	-	-	-	-	212	202	V
3	* 10.924	37.13	PK-U	38.3	-23.5	51.93	-	-	74	-22.07	-	-	199	173	H
	* 10.921	25.99	ADR	38.3	-23.5	40.79	54	-13.21	-	-	-	-	199	173	H
5	* 8.116	38.44	PK-U	36.1	-26.5	48.04	-	-	74	-25.96	-	-	321	254	V
	* 8.115	27.26	ADR	36.1	-26.5	36.86	54	-17.14	-	-	-	-	321	254	V
6	12.916	36.42	PK-U	39.6	-23.3	52.72	-	-	-	-	68.2	-15.48	212	174	V
7	16.778	36.23	PK-U	41.7	-16.9	61.03	-	-	-	-	68.2	-7.17	147	218	V
4	16.837	36.79	PK-U	41.7	-17.4	61.09	-	-	-	-	68.2	-7.11	265	196	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

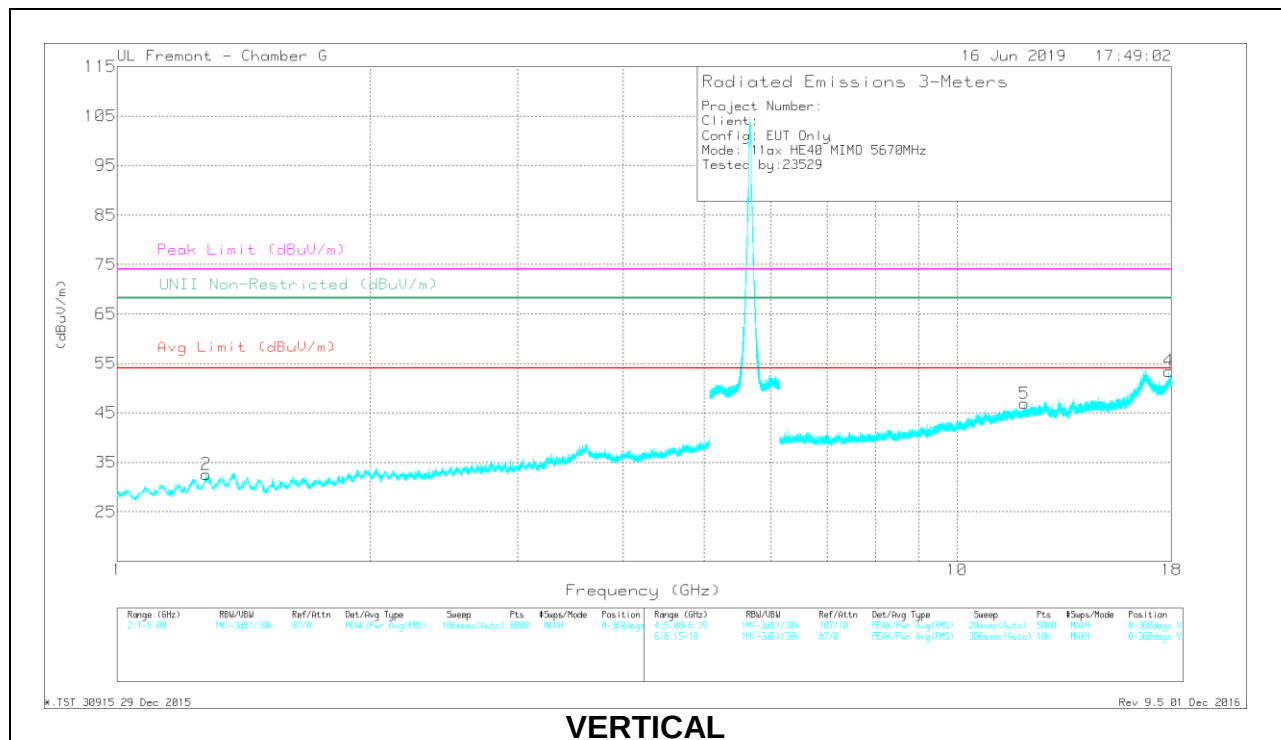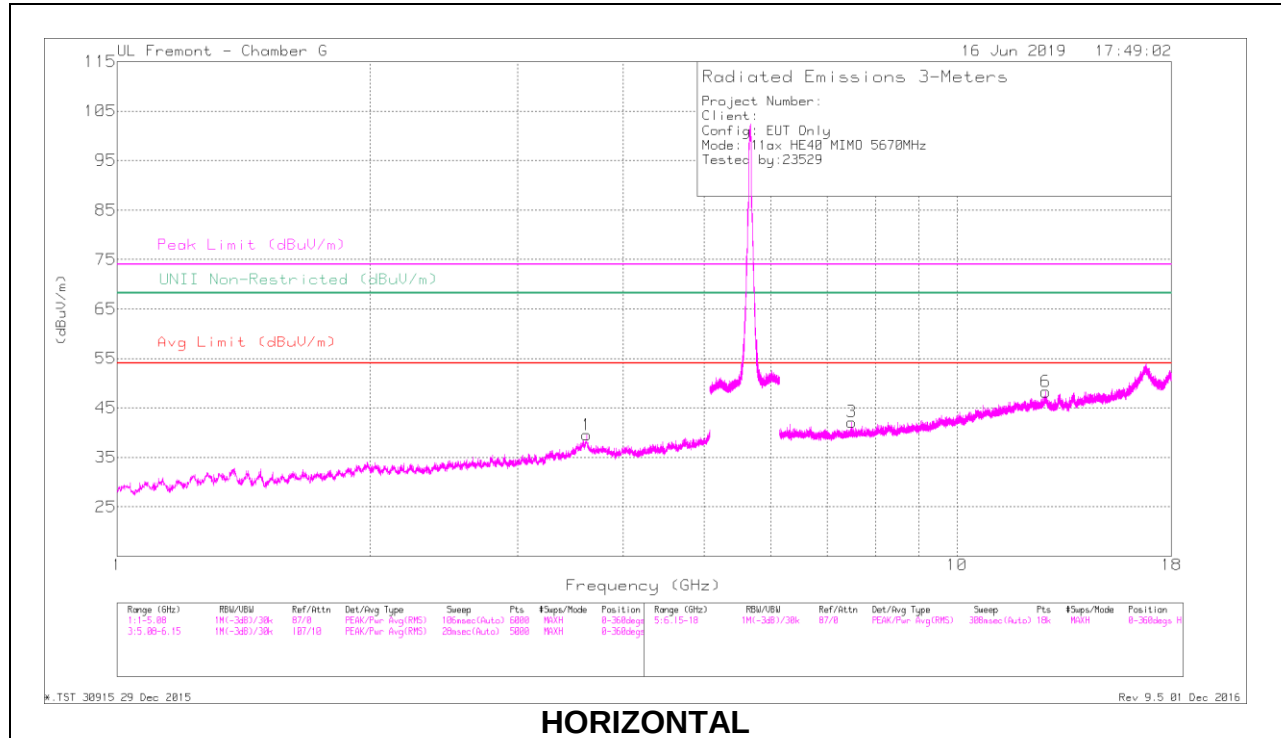

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.622	40.52	PK-U	35.6	-30.3	45.82	-	-	74	-28.18	-	-	12	124	H
	* 3.623	29.02	ADR	35.6	-30.3	34.32	54	-19.68	-	-	-	-	12	124	H
2	* 1.276	42.88	PK-U	29.8	-33.2	39.48	-	-	74	-34.52	-	-	134	181	V
	* 1.278	31.56	ADR	29.8	-33.2	28.16	54	-25.84	-	-	-	-	134	181	V
3	* 7.49	39.23	PK-U	36	-27.6	47.63	-	-	74	-26.37	-	-	166	222	H
	* 7.49	28.14	ADR	36	-27.6	36.54	54	-17.46	-	-	-	-	166	222	H
4	* 17.885	34.71	PK-U	42.5	-17.8	59.41	-	-	74	-14.59	-	-	184	397	V
	* 17.883	22.96	ADR	42.5	-17.9	47.56	54	-6.44	-	-	-	-	184	397	V
5	* 12.035	35.86	PK-U	39.5	-22.7	52.66	-	-	74	-21.34	-	-	294	369	V
	* 12.033	24.87	ADR	39.5	-22.7	41.67	54	-12.33	-	-	-	-	294	369	V
6	12.746	35.7	PK-U	39.6	-21.1	54.2	-	-	-	-	68.2	-14	156	292	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

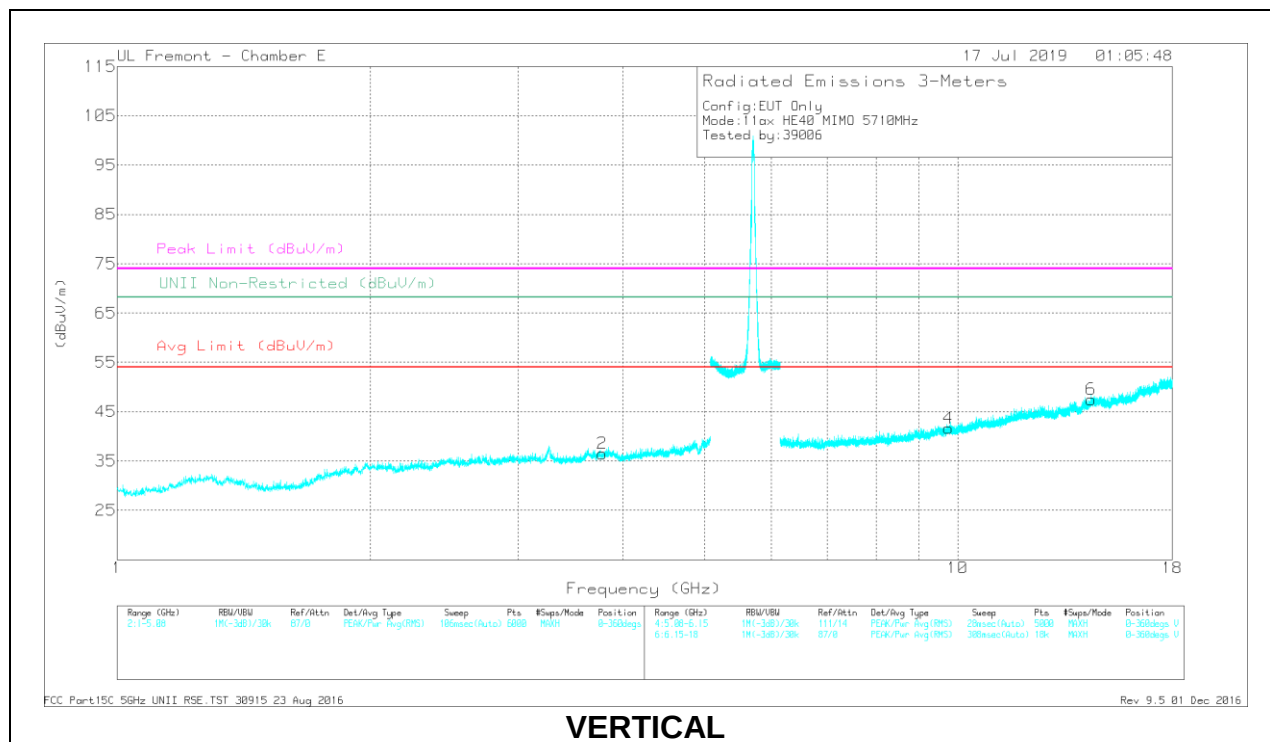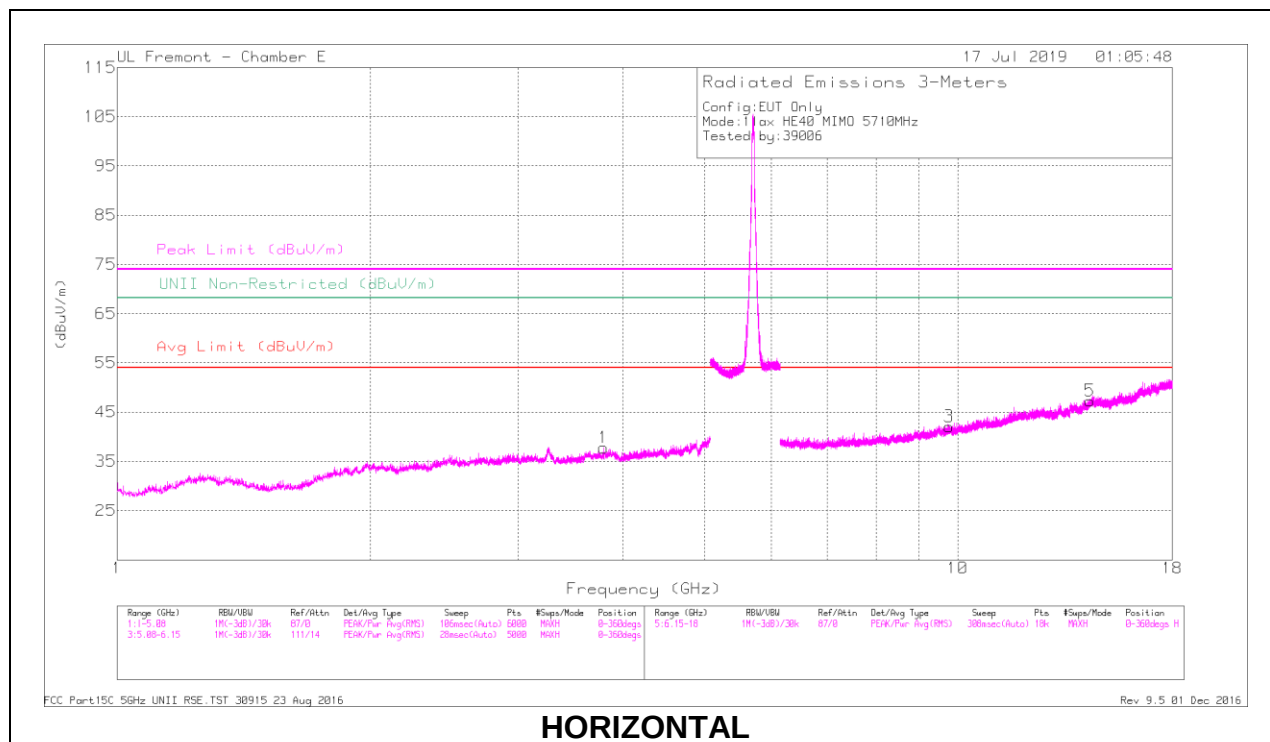

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.794	42.96	PK-U	33.3	-32.5	43.76	-	-	74	-30.24	-	-	251	150	H
	* 3.794	31.53	ADR	33.3	-32.5	32.33	54	-21.67	-	-	-	-	251	150	H
2	* 3.777	42.77	PK-U	33.2	-32.5	43.47	-	-	74	-30.53	-	-	200	190	V
	* 3.777	31.52	ADR	33.2	-32.5	32.22	54	-21.78	-	-	-	-	200	190	V
4	9.754	37.34	PK-U	37	-25.4	48.94	-	-	-	-	68.2	-19.26	173	241	V
3	9.771	37.2	PK-U	37	-25.5	48.7	-	-	-	-	68.2	-19.5	230	230	H
5	14.365	35.58	PK-U	39.4	-20.5	54.48	-	-	-	-	68.2	-13.72	159	300	H
6	14.413	35.48	PK-U	39.6	-20.5	54.58	-	-	-	-	68.2	-13.62	86	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

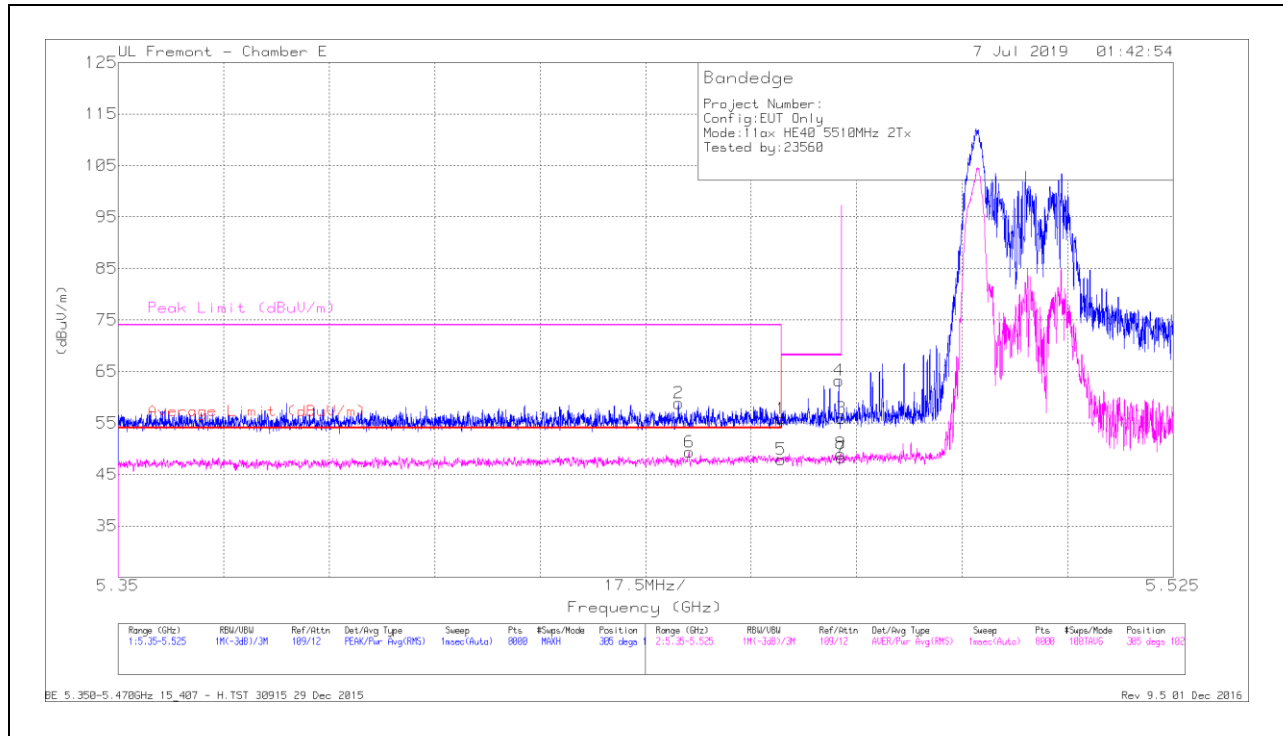


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.443	41.53	PK	34.5	-17.2	58.83	-	-	74	-15.17	305	102	H
6	* 5.445	32.06	RMS	34.5	-17.2	49.36	54	-4.64	-	-	305	102	H
1	* 5.46	38.43	PK	34.6	-17.2	55.83	-	-	74	-18.17	305	102	H
5	* 5.46	30.51	RMS	34.6	-17.2	47.91	54	-6.09	-	-	305	102	H
3	5.47	38.47	PK	34.6	-17.2	55.87	-	-	68.2	-12.33	305	102	H
4	5.47	45.83	PK	34.6	-17.2	63.23	-	-	68.2	-4.97	305	102	H
7	5.47	30.86	RMS	34.6	-17.2	48.26	-	-	-	-	305	102	H
8	5.47	31.62	RMS	34.6	-17.2	49.02	-	-	-	-	305	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

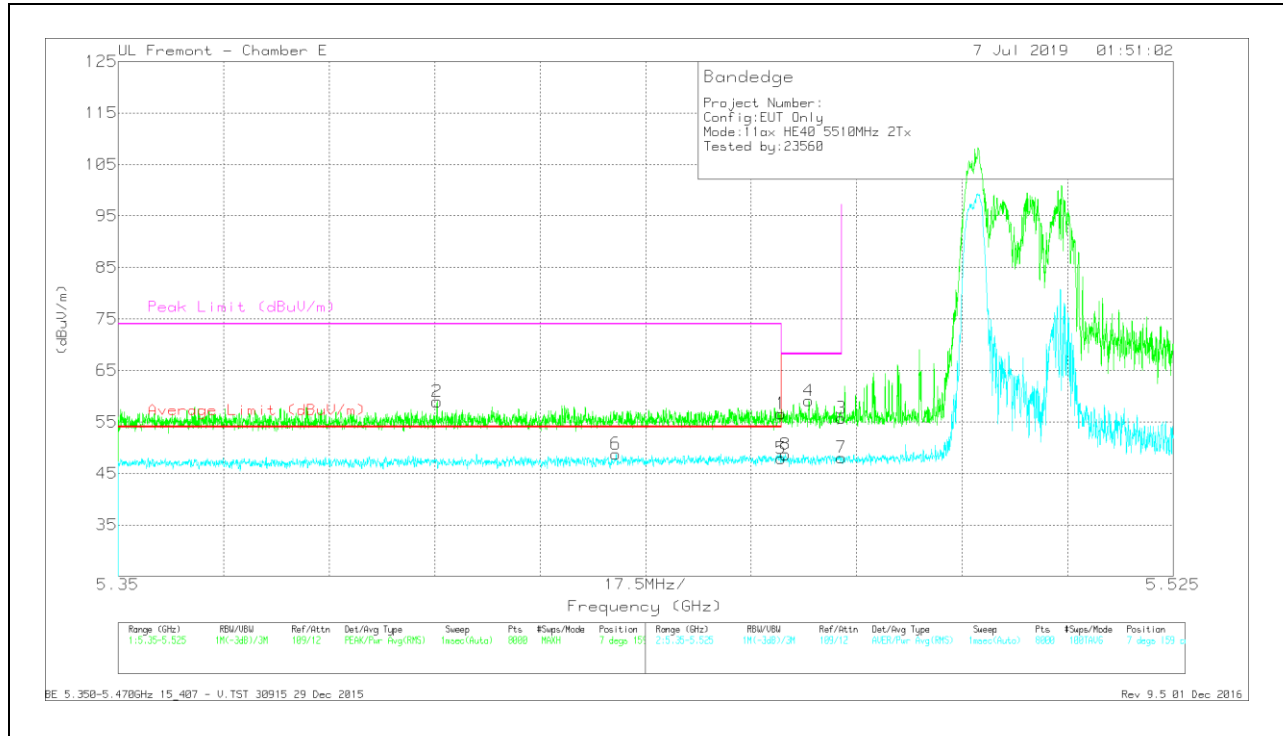

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/FiltriPad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.403	41.65	Pk	34.5	-17.2	58.95	-	-	74	-15.05	7	159	V
6	* 5.433	31.48	RMS	34.5	-17.2	48.78	54	-5.22	-	-	7	159	V
1	* 5.46	39.19	Pk	34.6	-17.2	56.59	-	-	74	-17.41	7	159	V
5	* 5.46	30.5	RMS	34.6	-17.2	47.9	54	-6.1	-	-	7	159	V
8	5.461	31.4	RMS	34.5	-17.2	48.7	-	-	-	-	7	159	V
4	5.465	41.79	Pk	34.5	-17.2	59.09	-	-	68.2	-9.11	7	159	V
3	5.47	38.33	Pk	34.6	-17.2	55.73	-	-	68.2	-12.47	7	159	V
7	5.47	30.66	RMS	34.6	-17.2	48.06	-	-	-	-	7	159	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

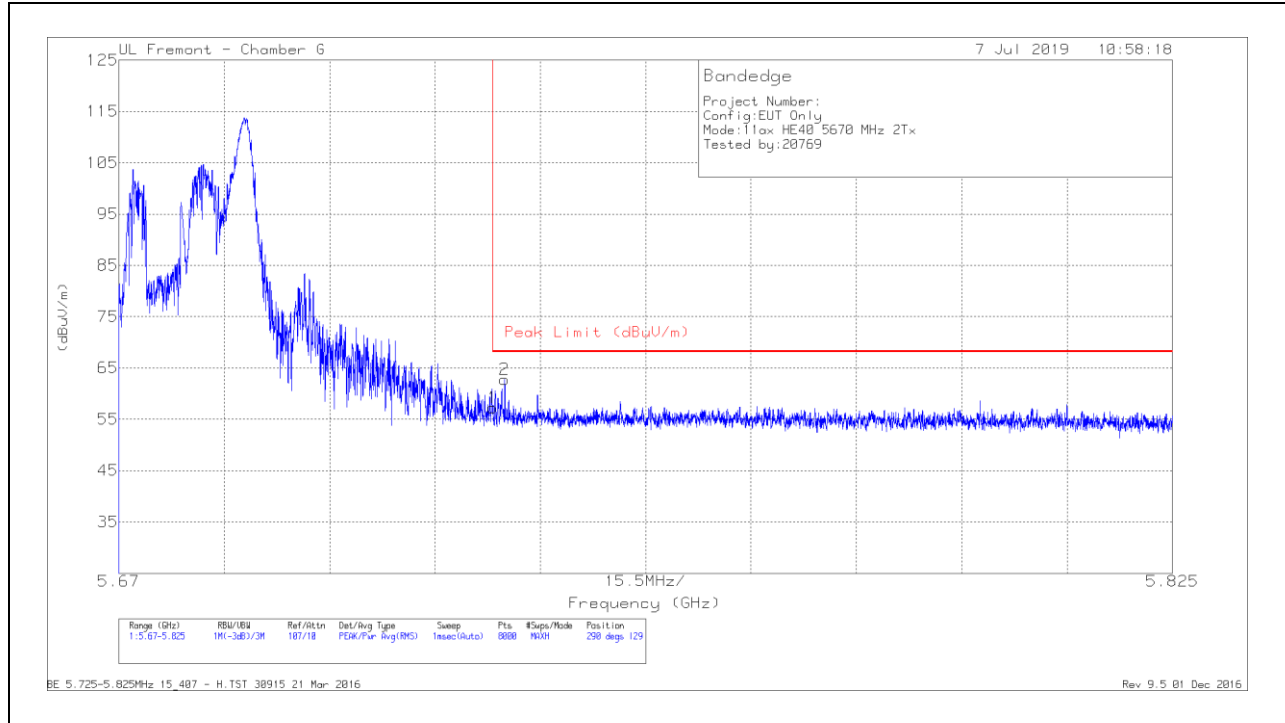

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.15	Pk	35.1	-20	57.25	68.2	-10.95	290	129	H
2	5.727	47.7	Pk	35.1	-20	62.8	68.2	-5.4	290	129	H

Pk - Peak detector

VERTICAL RESULT

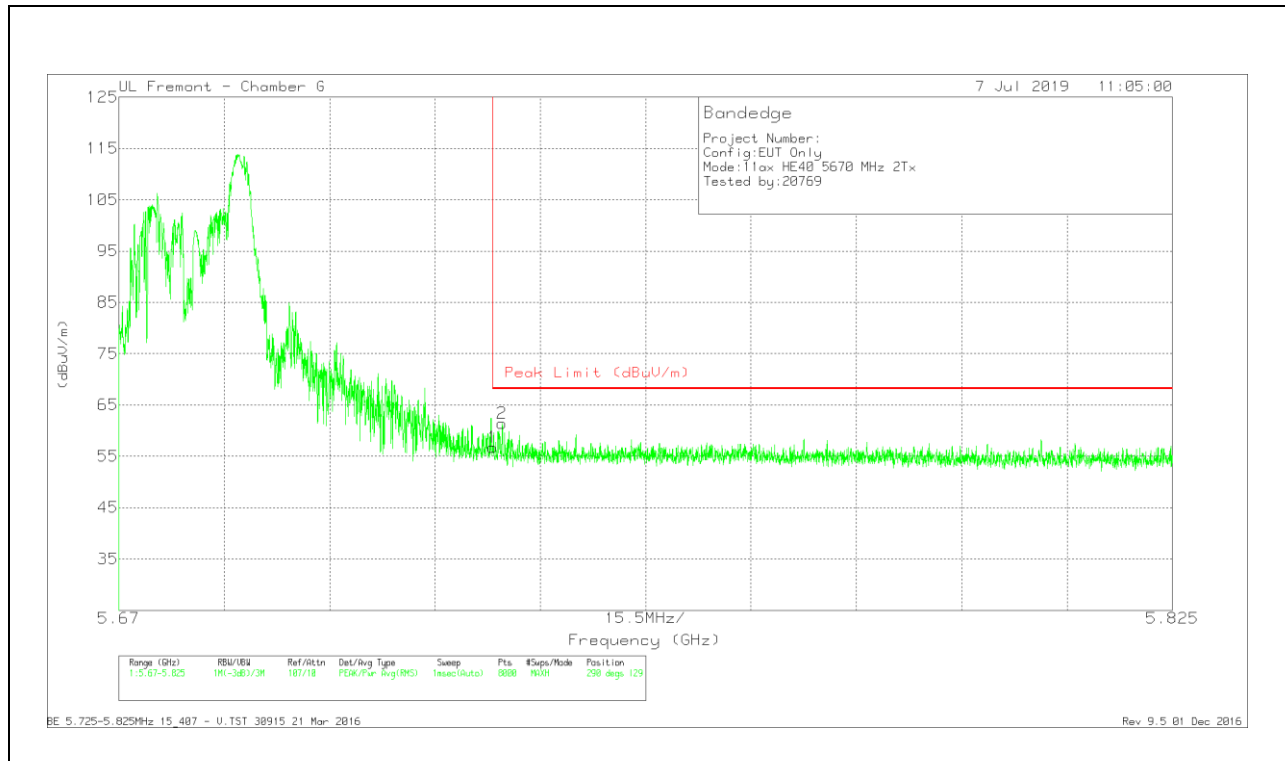



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.67	Pk	35.1	-20	56.77	68.2	-11.43	290	129	V
2	5.726	46.36	Pk	35.1	-20	61.46	68.2	-6.74	290	129	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

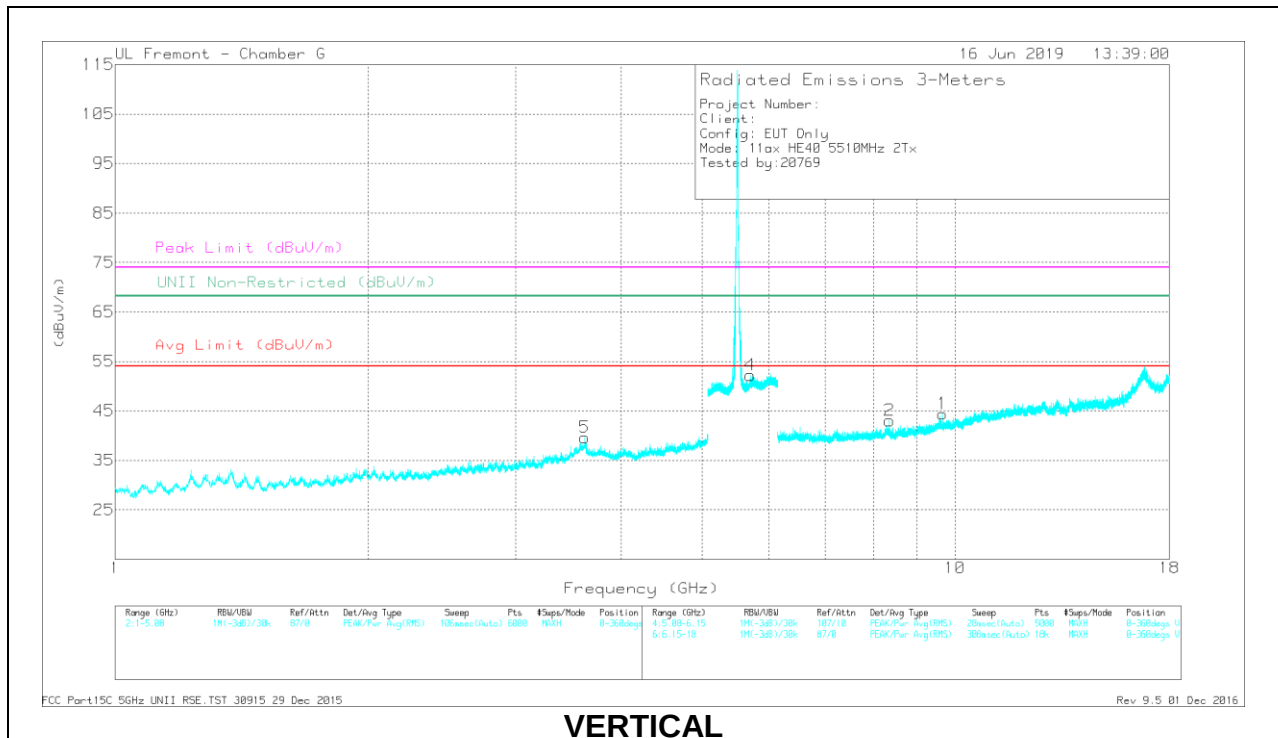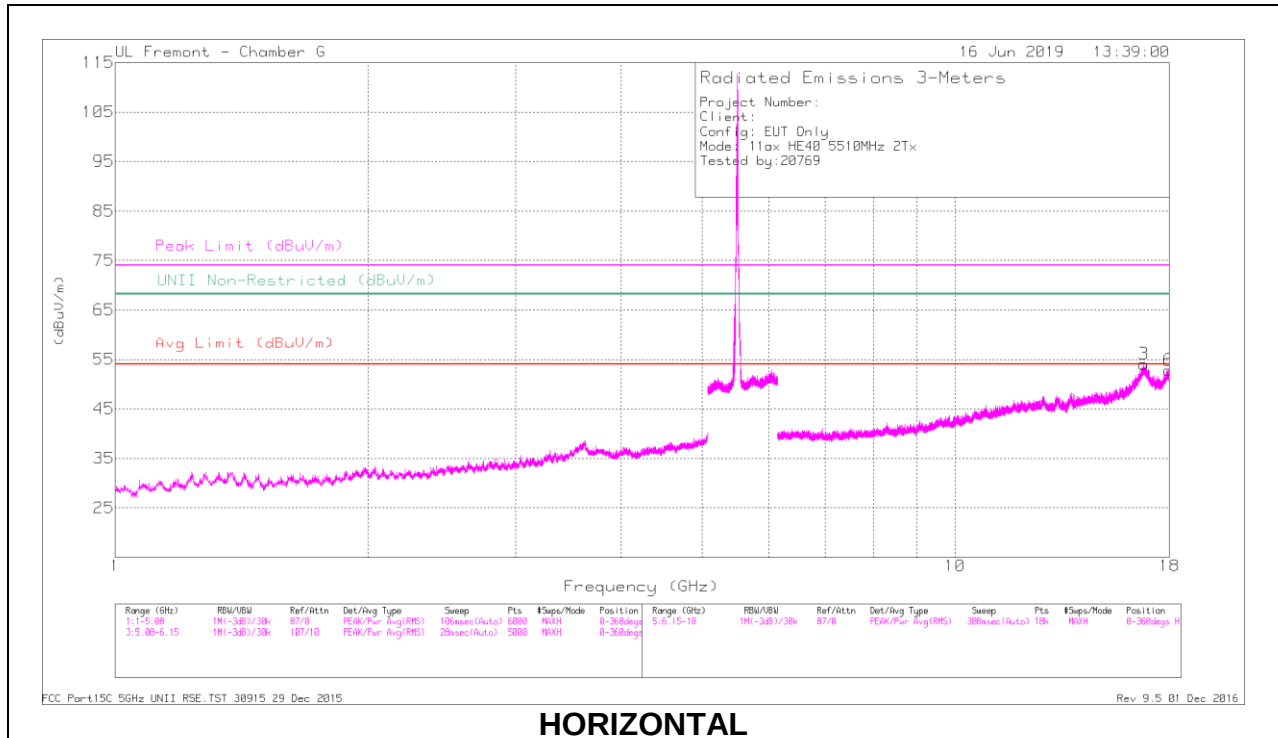

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 3.622	40.37	PK-U	35.6	-30.3	45.67	-	-	74	-28.33	-	-	28	314	V
	* 3.623	28.97	ADR	35.6	-30.3	34.27	54	-19.73	-	-	-	-	28	314	V
6	* 17.975	35.02	PK-U	42.7	-18.1	59.62	-	-	74	-14.38	-	-	225	214	H
	* 17.974	23.25	ADR	42.7	-18.1	47.85	54	-6.15	-	-	-	-	225	214	H
2	* 8.357	38.61	PK-U	36.1	-26.2	48.51	-	-	74	-25.49	-	-	20	390	V
	* 8.356	26.74	ADR	36.1	-26.2	36.64	54	-17.36	-	-	-	-	20	390	V
4	5.704	43.5	PK-U	35	-19.9	58.6	-	-	-	-	68.2	-9.6	148	177	V
1	9.672	37.54	PK-U	37.5	-25.6	49.44	-	-	-	-	68.2	-18.76	88	317	V
3	16.781	36.7	PK-U	41.8	-16.9	61.6	-	-	-	-	68.2	-6.6	360	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

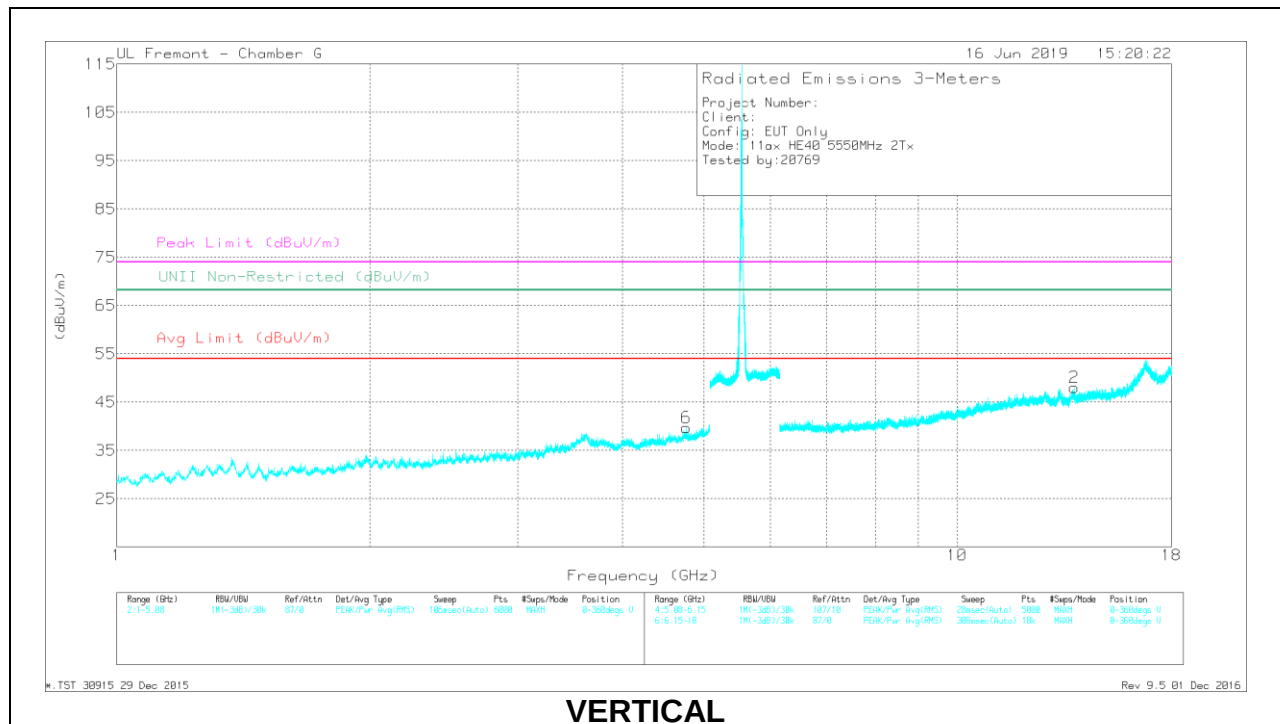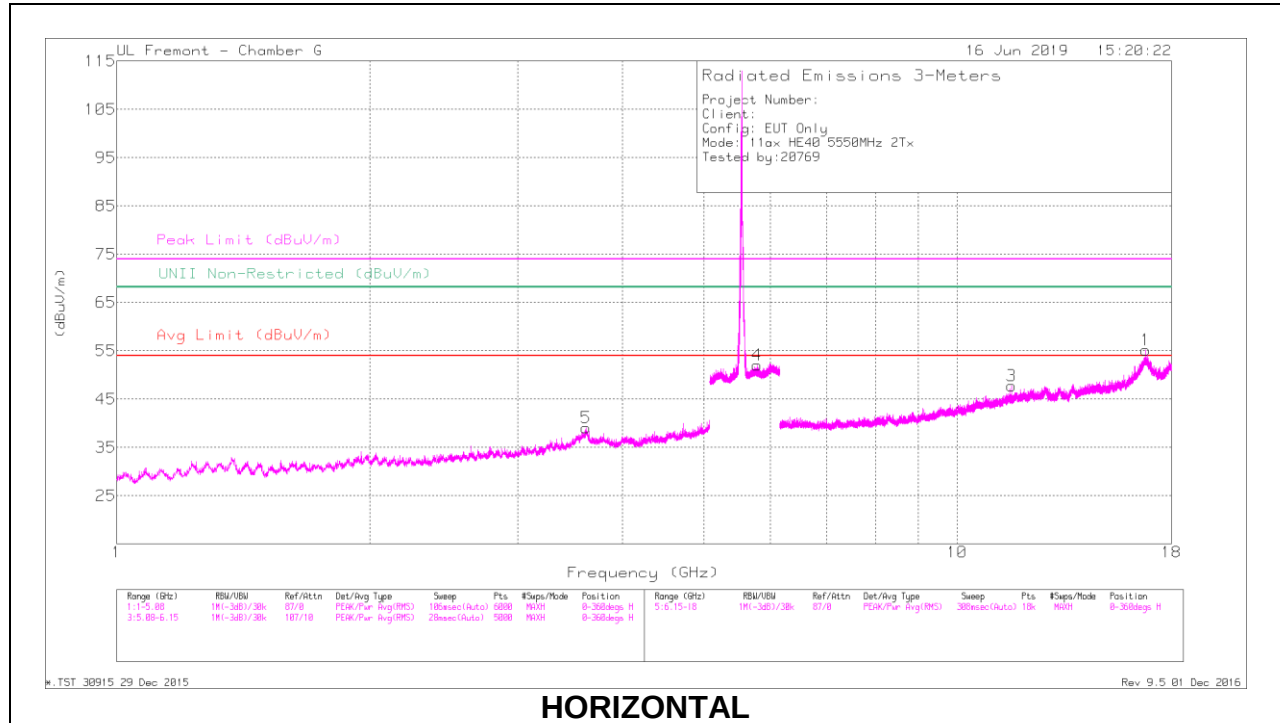

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 3.617	40.65	PK-U	35.7	-30.3	46.05	-	-	74	-27.95	-	-	338	372	H
	* 3.62	29.18	ADR	35.7	-30.3	34.58	54	-19.42	-	-	-	-	338	372	H
6	* 4.763	41.6	PK-U	34.2	-29.3	46.5	-	-	74	-27.5	-	-	172	266	V
	* 4.763	28.92	ADR	34.2	-29.3	33.82	54	-20.18	-	-	-	-	172	266	V
3	* 11.625	37.14	PK-U	39.2	-23.1	53.24	-	-	74	-20.76	-	-	44	189	H
	* 11.624	24.74	ADR	39.2	-23.1	40.84	54	-13.16	-	-	-	-	44	189	H
4	5.78	43.53	PK-U	35.3	-20.1	58.73	-	-	-	-	68.2	-9.47	19	129	H
2	13.801	37.41	PK-U	39.5	-22.8	54.11	-	-	-	-	68.2	-14.09	261	165	V
1	16.784	36.89	PK-U	41.8	-16.9	61.79	-	-	-	-	68.2	-6.41	113	211	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

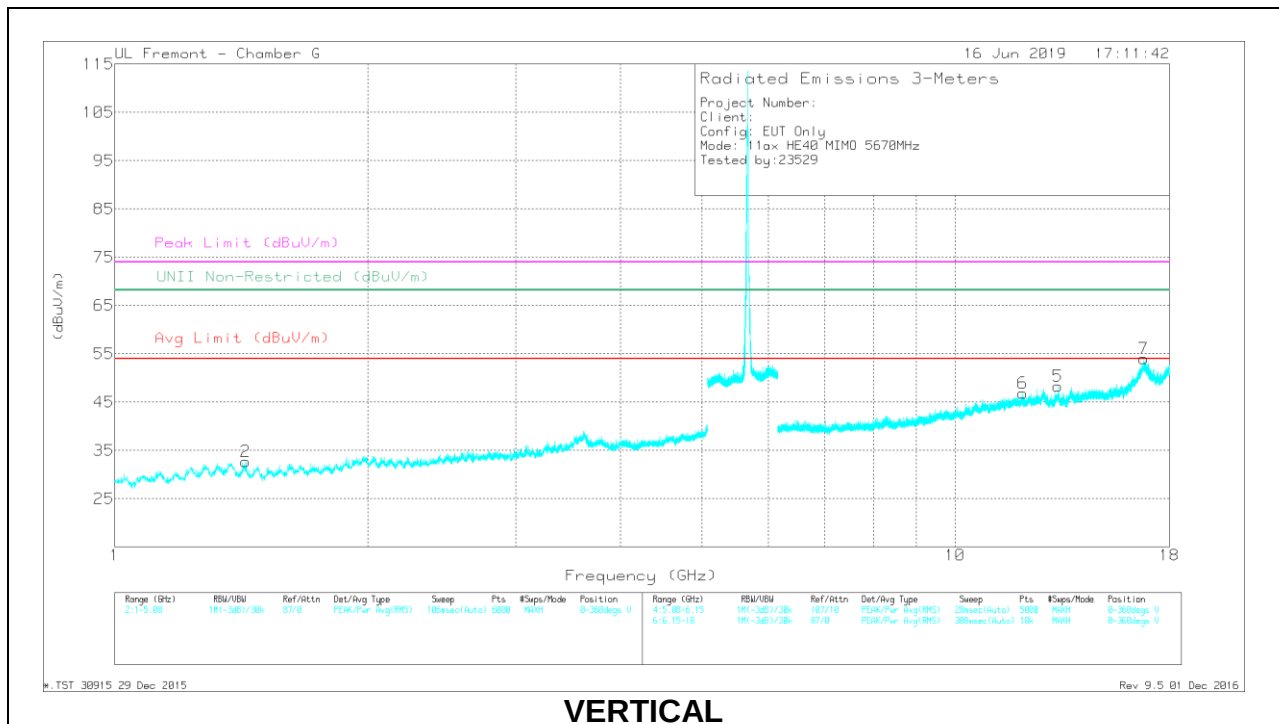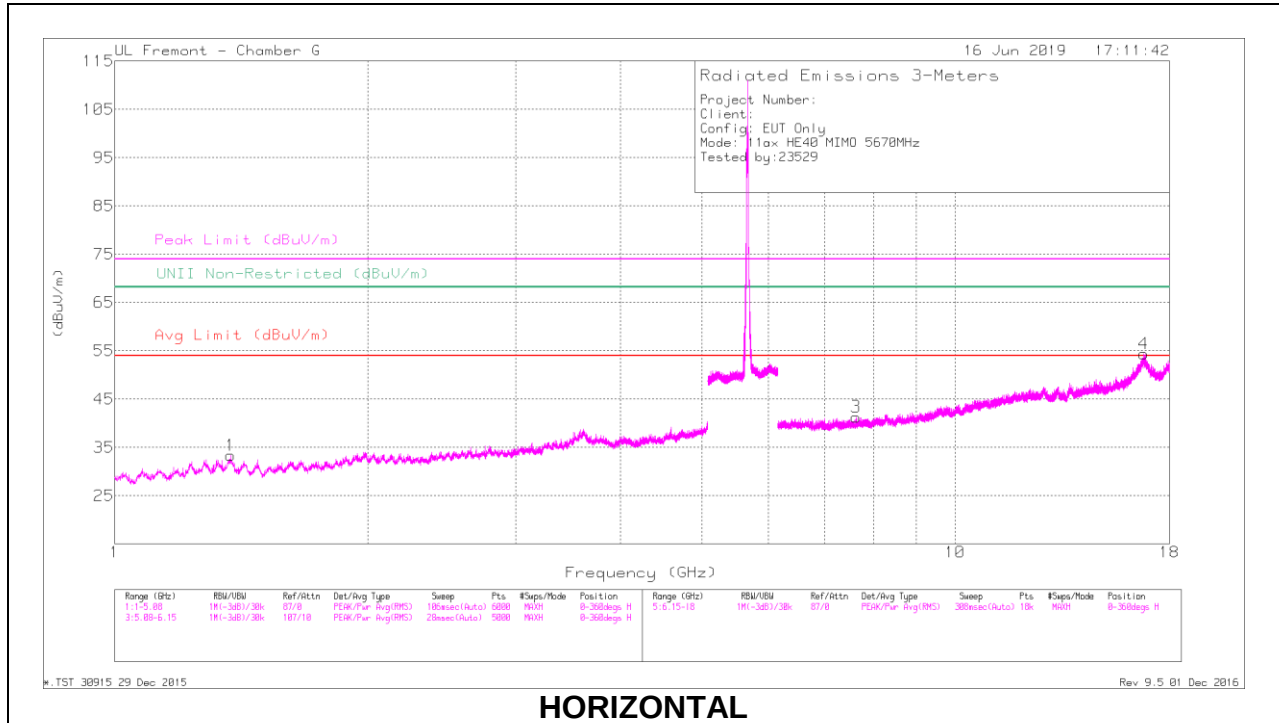

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.374	42.88	PK-U	29.7	-32.1	40.48	-	-	74	-33.52	-	-	8	105	H
	* 1.373	31.3	ADR	29.8	-32.1	29	54	-25	-	-	-	-	8	105	H
3	* 7.629	39.35	PK-U	36	-27.3	48.05	-	-	74	-25.95	-	-	110	140	H
	* 7.631	27.78	ADR	36	-27.3	36.48	54	-17.52	-	-	-	-	110	140	H
6	* 12.035	36.09	PK-U	39.5	-22.7	52.89	-	-	74	-21.11	-	-	265	123	V
	* 12.036	25.03	ADR	39.5	-22.7	41.83	54	-12.17	-	-	-	-	265	123	V
5	* 13.261	36.49	PK-U	39.6	-21.6	54.49	-	-	74	-19.51	-	-	303	200	V
	* 13.262	24.93	ADR	39.6	-21.7	42.83	54	-11.17	-	-	-	-	303	200	V
2	1.431	43.66	PK-U	28.7	-31.7	40.66	-	-	-	-	68.2	-27.54	186	270	V
7	16.767	35.73	PK-U	41.8	-17.3	60.23	-	-	-	-	68.2	-7.97	164	178	V
4	16.78	36.77	PK-U	41.7	-16.9	61.57	-	-	-	-	68.2	-6.63	308	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

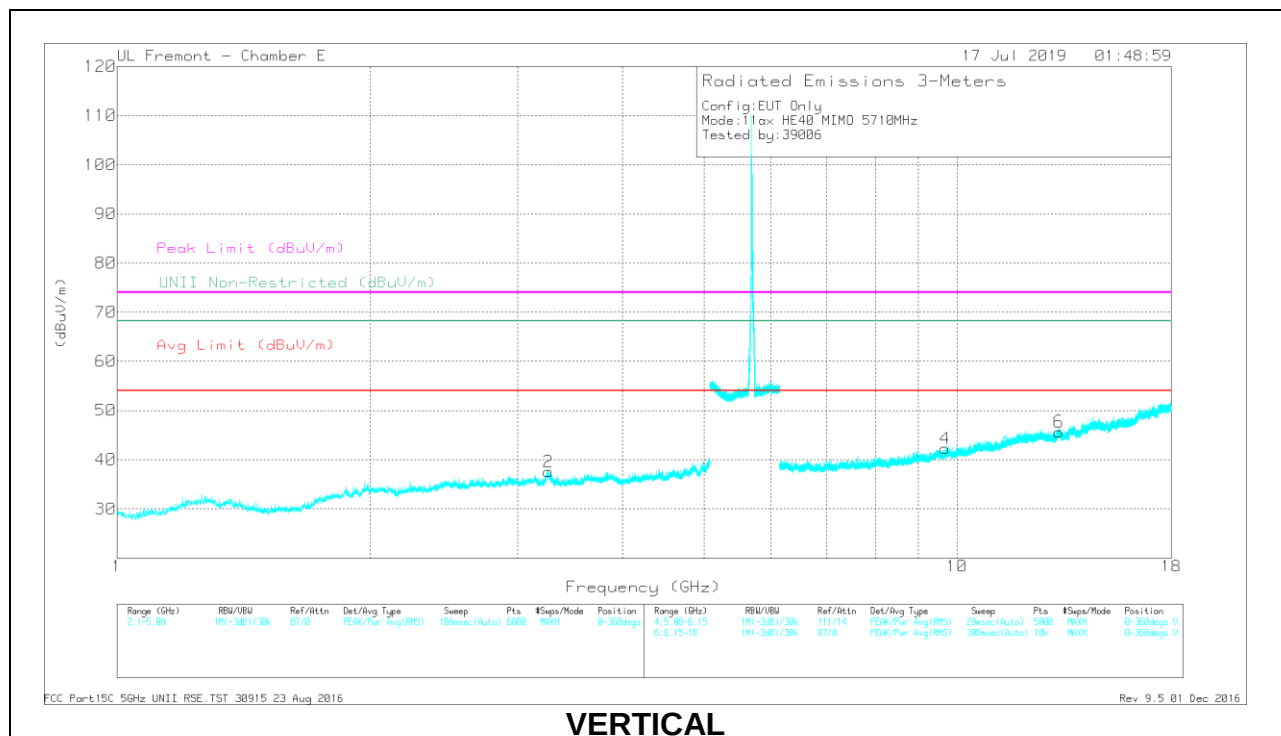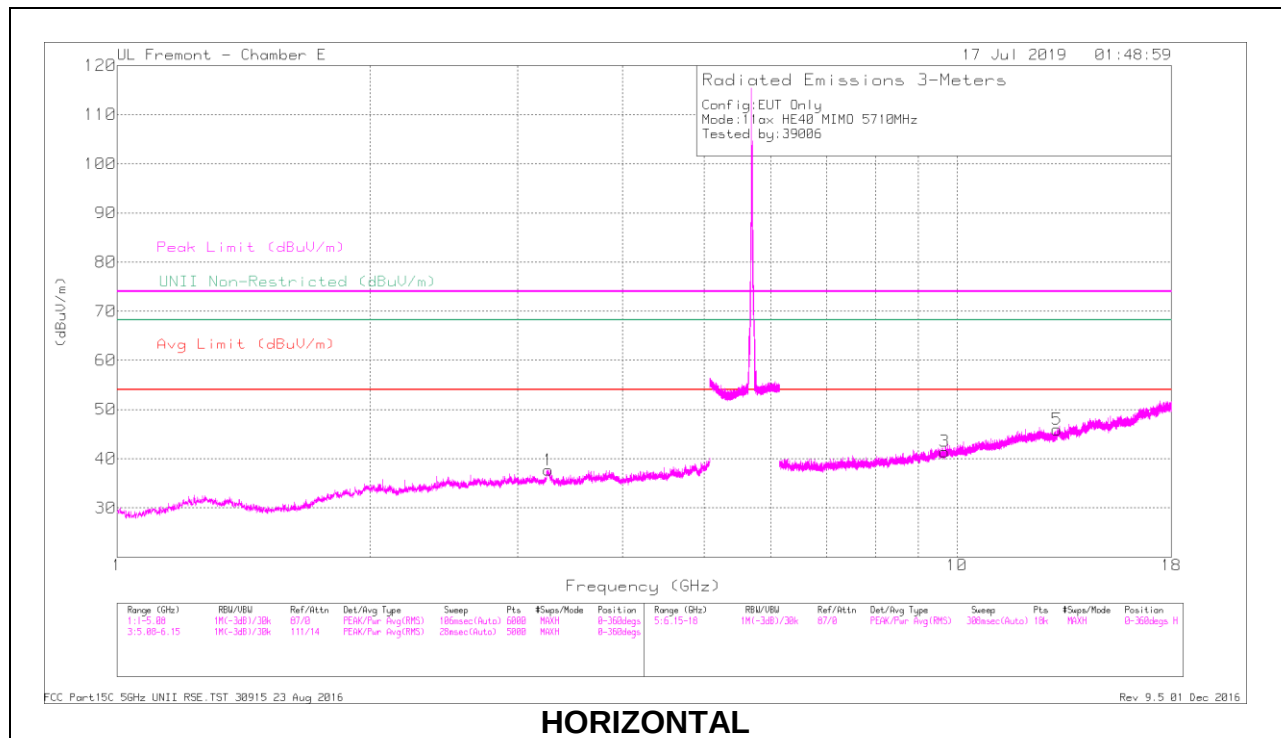

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.265	44.79	PK-U	35.1	-34.5	45.39	-	-	74	-28.61	-	-	80	190	V
	* 3.262	33.23	ADR	35.1	-34.5	33.83	54	-20.17	-	-	-	-	80	190	V
1	3.087	46.33	PK-U	33.3	-34.9	44.73	-	-	-	-	68.2	-23.47	60	160	H
3	9.669	37.06	PK-U	36.9	-25.6	48.36	-	-	-	-	68.2	-19.84	110	210	H
4	9.682	37.91	PK-U	37	-25.6	49.31	-	-	-	-	68.2	-18.89	250	161	V
5	13.153	36.13	PK-U	39	-22	53.13	-	-	-	-	68.2	-15.07	269	200	H
6	13.227	35.87	PK-U	39	-21.4	53.47	-	-	-	-	68.2	-14.73	280	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX Antenna 6 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

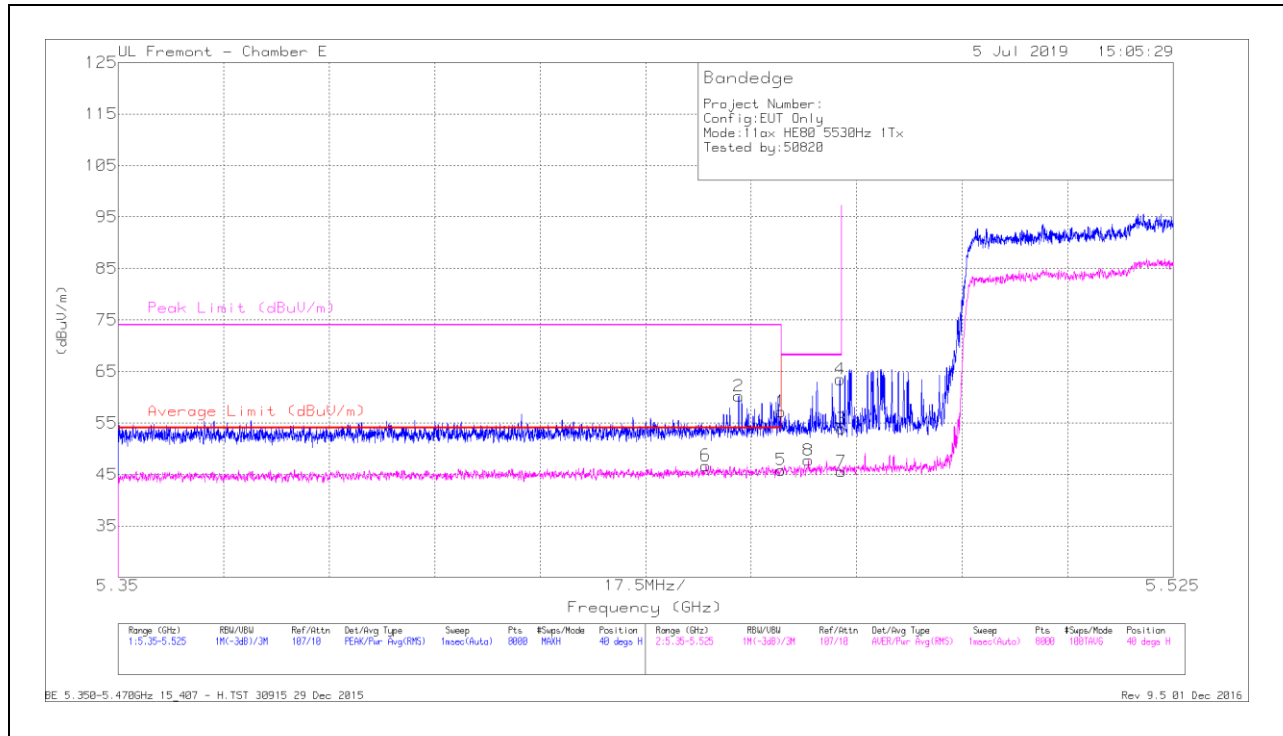


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.447	33.61	RMS	34.5	-21.4	46.71	54	-7.29	-	-	40	158	H
2	* 5.453	47.13	PK	34.5	-21.4	60.23	-	-	74	-13.77	40	158	H
1	* 5.46	43.9	PK	34.6	-21.3	57.2	-	-	74	-16.8	40	158	H
5	* 5.46	32.57	RMS	34.6	-21.3	45.87	54	-8.13	-	-	40	158	H
8	5.464	34.54	RMS	34.5	-21.3	47.74	-	-	-	-	40	158	H
3	5.47	40.56	PK	34.6	-21.3	53.86	-	-	68.2	-14.34	40	158	H
4	5.47	50.18	PK	34.6	-21.3	63.48	-	-	68.2	-4.72	40	158	H
7	5.47	32.23	RMS	34.6	-21.3	45.53	-	-	-	-	40	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

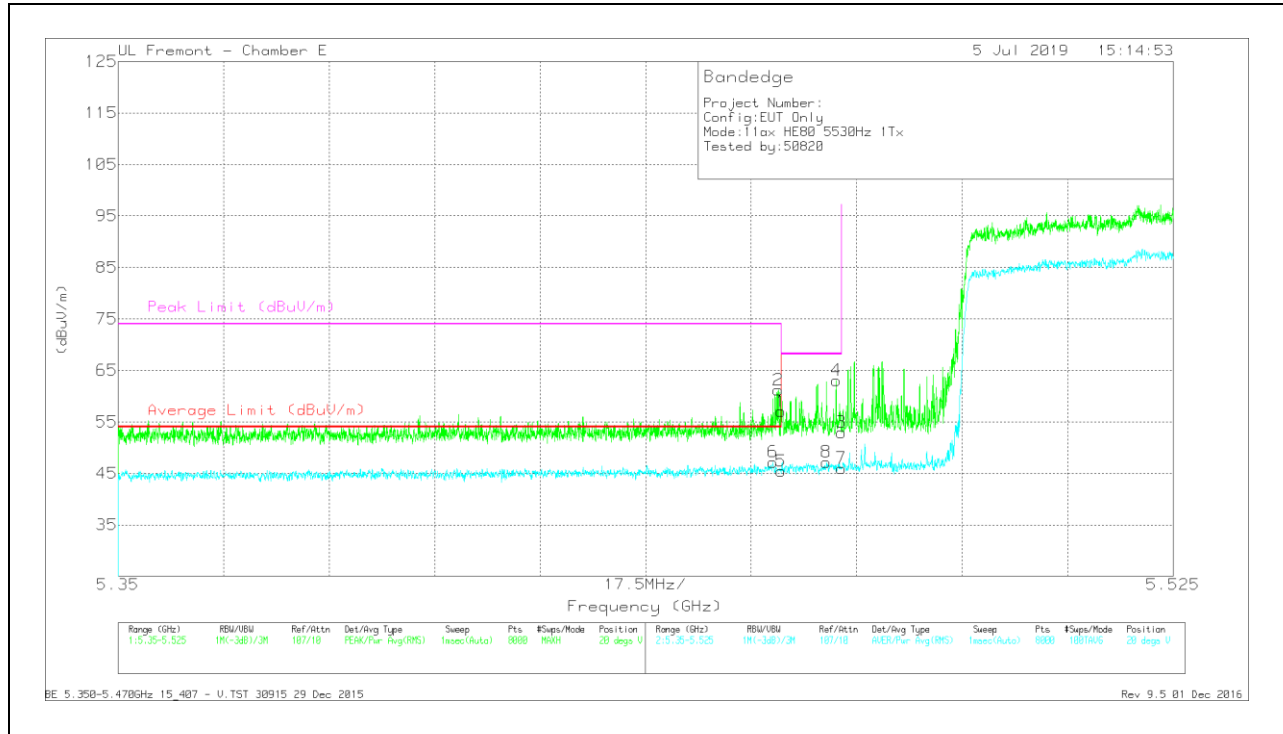

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/FiltriPad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	47.91	Pk	34.6	-21.3	61.21	-	-	74	-12.79	20	101	V
6	* 5.459	33.91	RMS	34.6	-21.3	47.21	54	-6.79	-	-	20	101	V
1	* 5.46	43.75	Pk	34.6	-21.3	57.05	-	-	74	-16.95	20	101	V
5	* 5.46	32.11	RMS	34.6	-21.3	45.41	54	-8.59	-	-	20	101	V
8	5.467	33.99	RMS	34.5	-21.3	47.19	-	-	-	-	20	101	V
4	5.469	49.75	Pk	34.6	-21.3	63.05	-	-	68.2	-5.15	20	101	V
3	5.47	39.66	Pk	34.6	-21.3	52.96	-	-	68.2	-15.24	20	101	V
7	5.47	32.65	RMS	34.6	-21.3	45.95	-	-	-	-	20	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

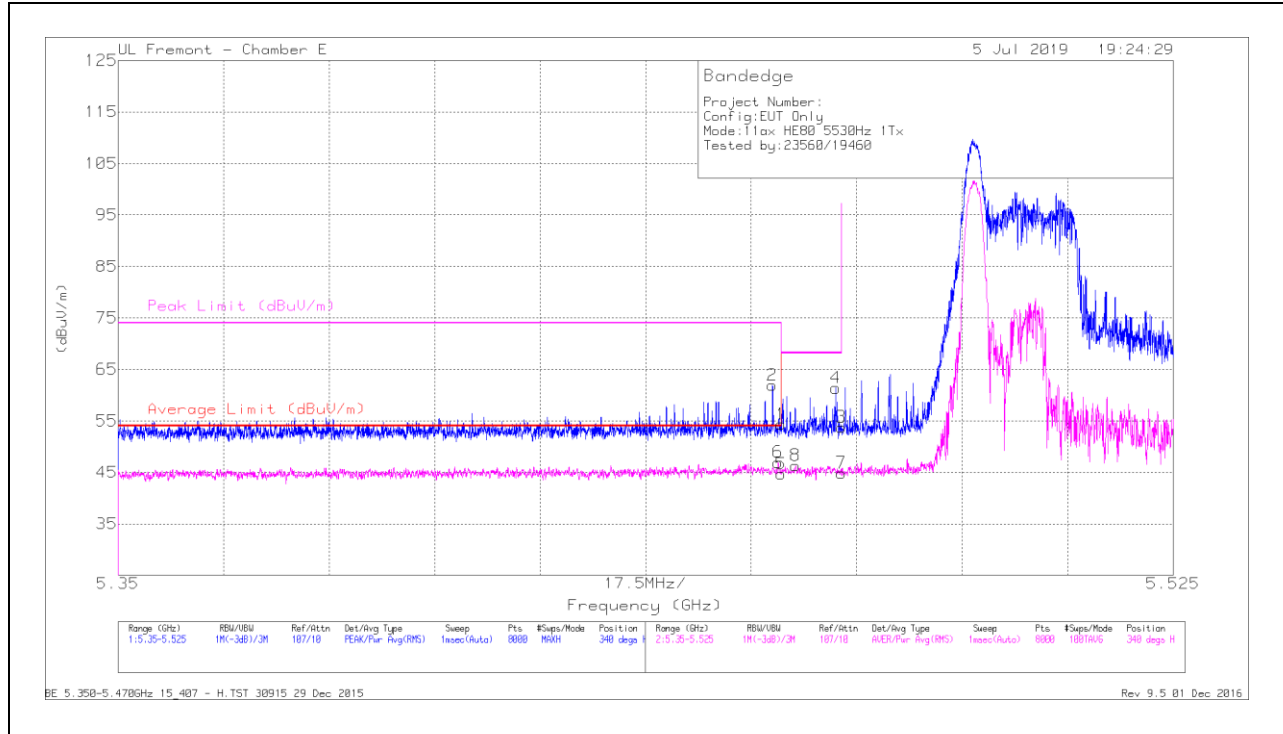


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.06	PK	34.6	-21.3	54.36	-	-	74	-19.64	340	149	H
2	* 5.459	48.61	PK	34.6	-21.3	61.91	-	-	74	-12.09	340	149	H
5	* 5.46	31.39	RMS	34.6	-21.3	44.69	54	-9.31	-	-	340	149	H
6	* 5.459	33.67	RMS	34.6	-21.3	46.97	54	-7.03	-	-	340	149	H
8	5.462	33.14	RMS	34.5	-21.3	46.34	-	-	-	-	340	149	H
4	5.469	48.1	PK	34.6	-21.3	61.4	-	-	68.2	-6.8	340	149	H
3	5.47	40.48	PK	34.6	-21.3	53.78	-	-	68.2	-14.42	340	149	H
7	5.47	31.55	RMS	34.6	-21.3	44.85	-	-	-	-	340	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

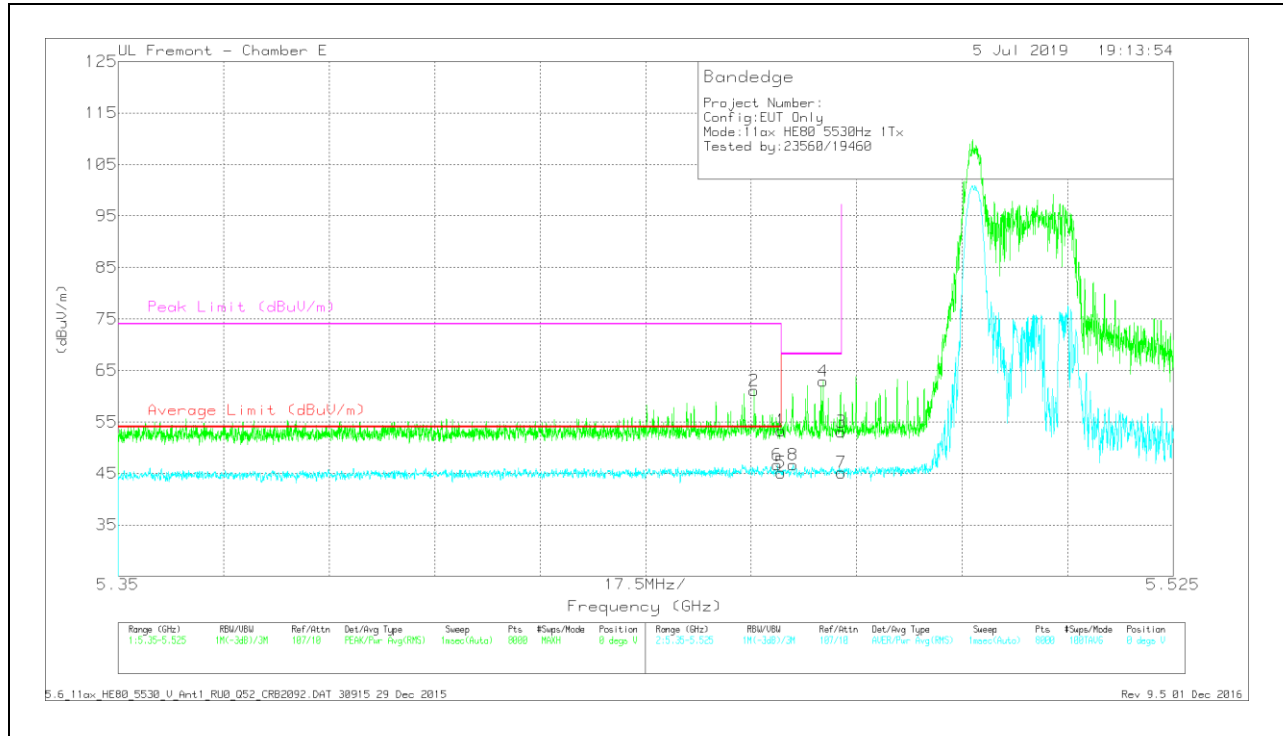

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40	Pk	34.6	-21.3	53.3	-	-	74	-20.7	0	125	V
2	* 5.455	47.86	Pk	34.6	-21.4	61.06	-	-	74	-12.94	0	125	V
5	* 5.46	31.86	RMS	34.6	-21.3	45.16	54	-8.84	-	-	0	125	V
6	* 5.459	33.36	RMS	34.6	-21.3	46.66	54	-7.34	-	-	0	125	V
8	5.462	33.45	RMS	34.5	-21.3	46.65	-	-	-	-	0	125	V
4	5.467	49.72	Pk	34.5	-21.3	62.92	-	-	68.2	-5.28	0	125	V
3	5.47	39.75	Pk	34.6	-21.3	53.05	-	-	68.2	-15.15	0	125	V
7	5.47	31.86	RMS	34.6	-21.3	45.16	-	-	-	-	0	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

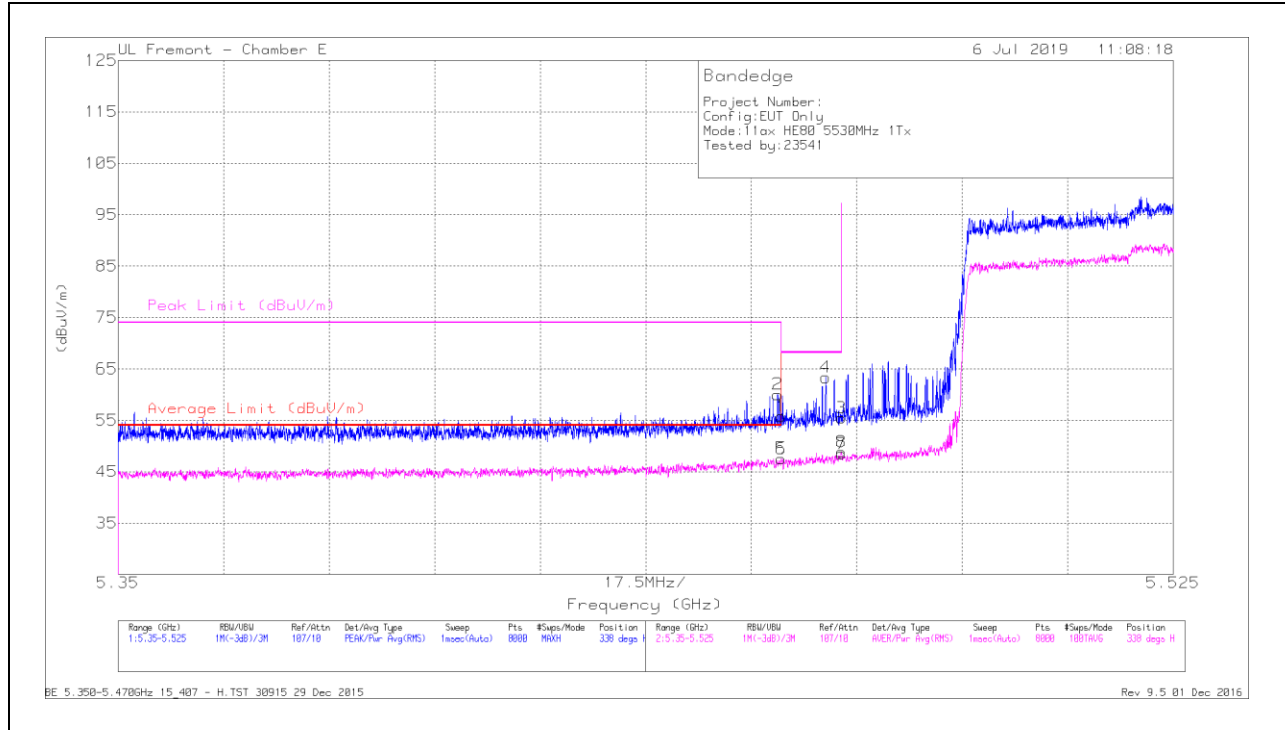


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	46.74	PK	34.6	-21.3	60.04	-	-	74	-13.96	338	202	H
1	* 5.46	42.47	PK	34.6	-21.3	55.77	-	-	74	-18.23	338	202	H
5	* 5.46	34.25	RMS	34.6	-21.3	47.55	54	-6.45	-	-	338	202	H
6	* 5.46	34.22	RMS	34.6	-21.3	47.52	54	-6.48	-	-	338	202	H
4	5.467	50.16	PK	34.5	-21.3	63.36	-	-	68.2	-4.84	338	202	H
3	5.47	42.17	PK	34.6	-21.3	55.47	-	-	68.2	-12.73	338	202	H
7	5.47	35.19	RMS	34.6	-21.3	48.49	-	-	-	-	338	202	H
8	5.47	35.54	RMS	34.6	-21.3	48.84	-	-	-	-	338	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

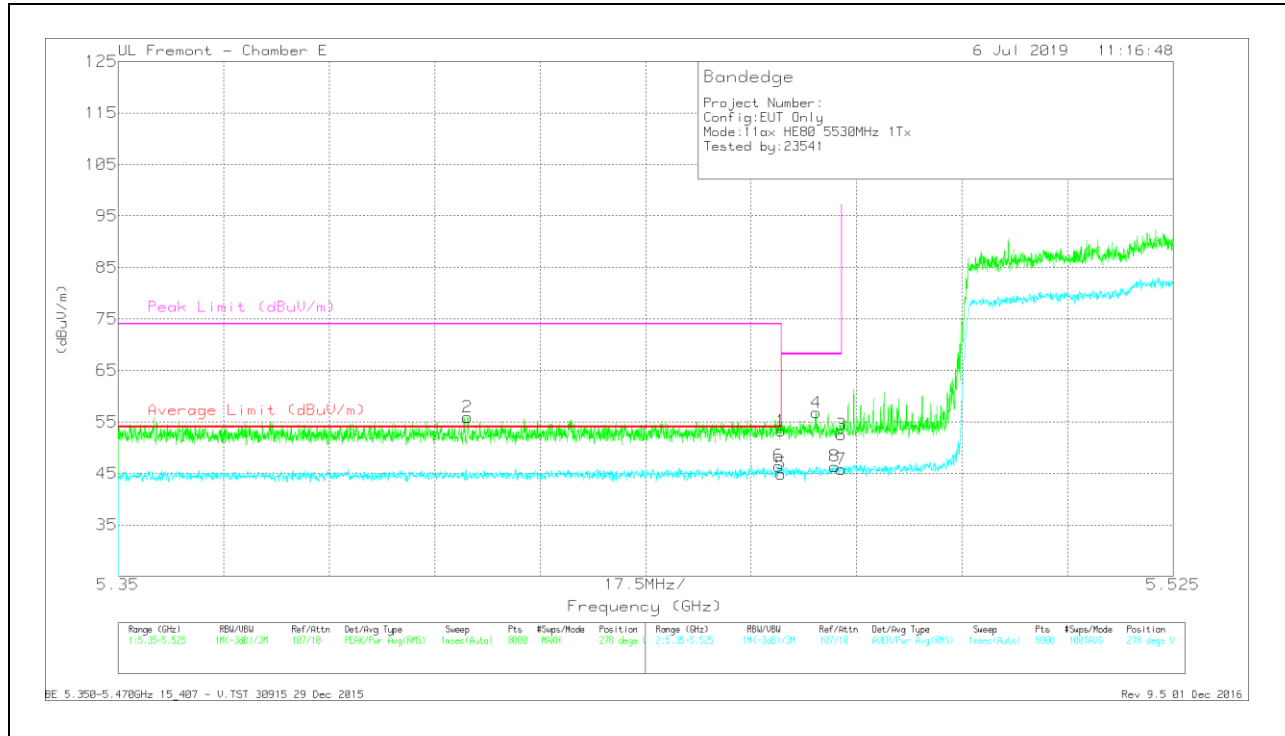

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.408	42.81	Pk	34.5	-21.4	55.91	-	-	74	-18.09	278	102	V
1	* 5.46	39.93	Pk	34.6	-21.3	53.23	-	-	74	-20.77	278	102	V
5	* 5.46	31.61	RMS	34.6	-21.3	44.91	54	-9.09	-	-	278	102	V
6	* 5.46	33.16	RMS	34.6	-21.3	46.46	54	-7.54	-	-	278	102	V
4	5.466	43.58	Pk	34.5	-21.3	56.78	-	-	68.2	-11.42	278	102	V
8	5.469	33.06	RMS	34.6	-21.3	46.36	-	-	-	-	278	102	V
3	5.47	39.2	Pk	34.6	-21.3	52.5	-	-	68.2	-15.7	278	102	V
7	5.47	32.51	RMS	34.6	-21.3	45.81	-	-	-	-	278	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

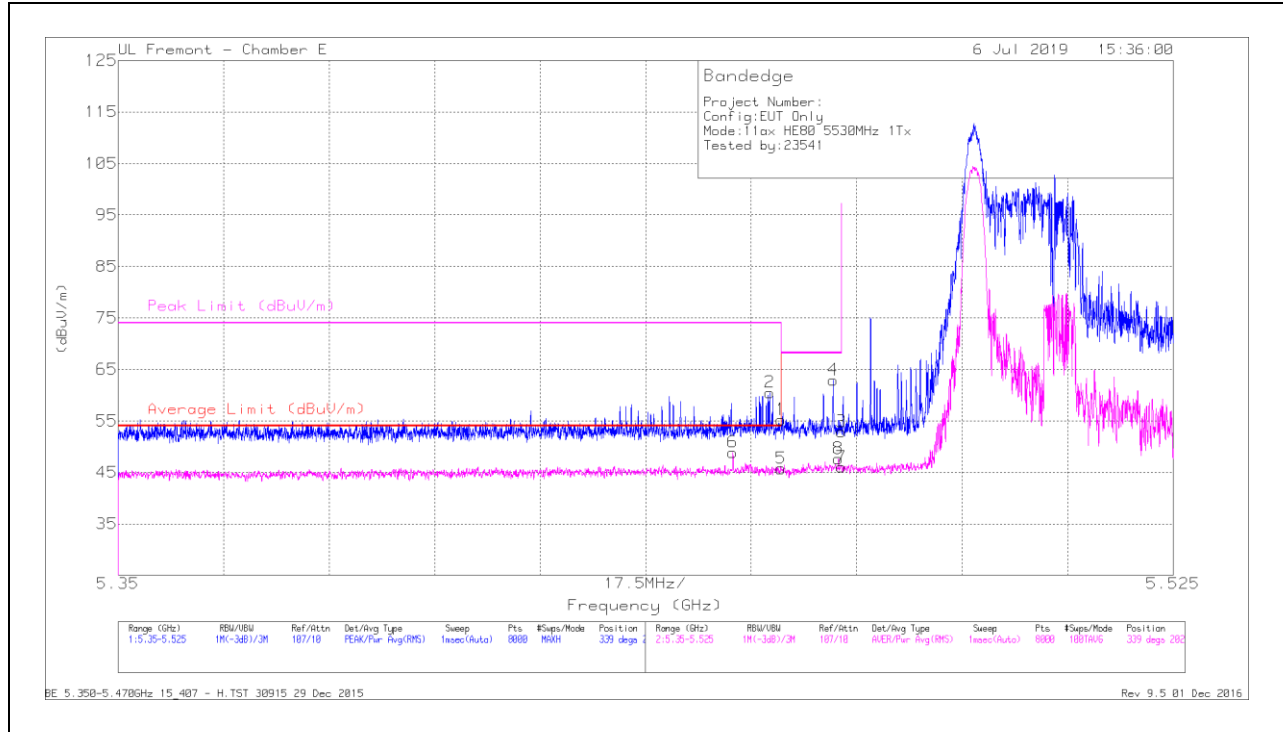


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.452	35.82	RMS	34.5	-21.4	48.92	54	-5.08	-	-	339	202	H
2	* 5.458	47.23	PK	34.6	-21.3	60.53	-	-	74	-13.47	339	202	H
1	* 5.46	41.95	PK	34.6	-21.3	55.25	-	-	74	-18.75	339	202	H
5	* 5.46	32.46	RMS	34.6	-21.3	45.76	54	-8.24	-	-	339	202	H
4	5.469	49.66	PK	34.6	-21.3	62.96	-	-	68.2	-5.24	339	202	H
8	5.469	34.38	RMS	34.6	-21.3	47.68	-	-	-	-	339	202	H
3	5.47	39.61	PK	34.6	-21.3	52.91	-	-	68.2	-15.29	339	202	H
7	5.47	32.75	RMS	34.6	-21.3	46.05	-	-	-	-	339	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

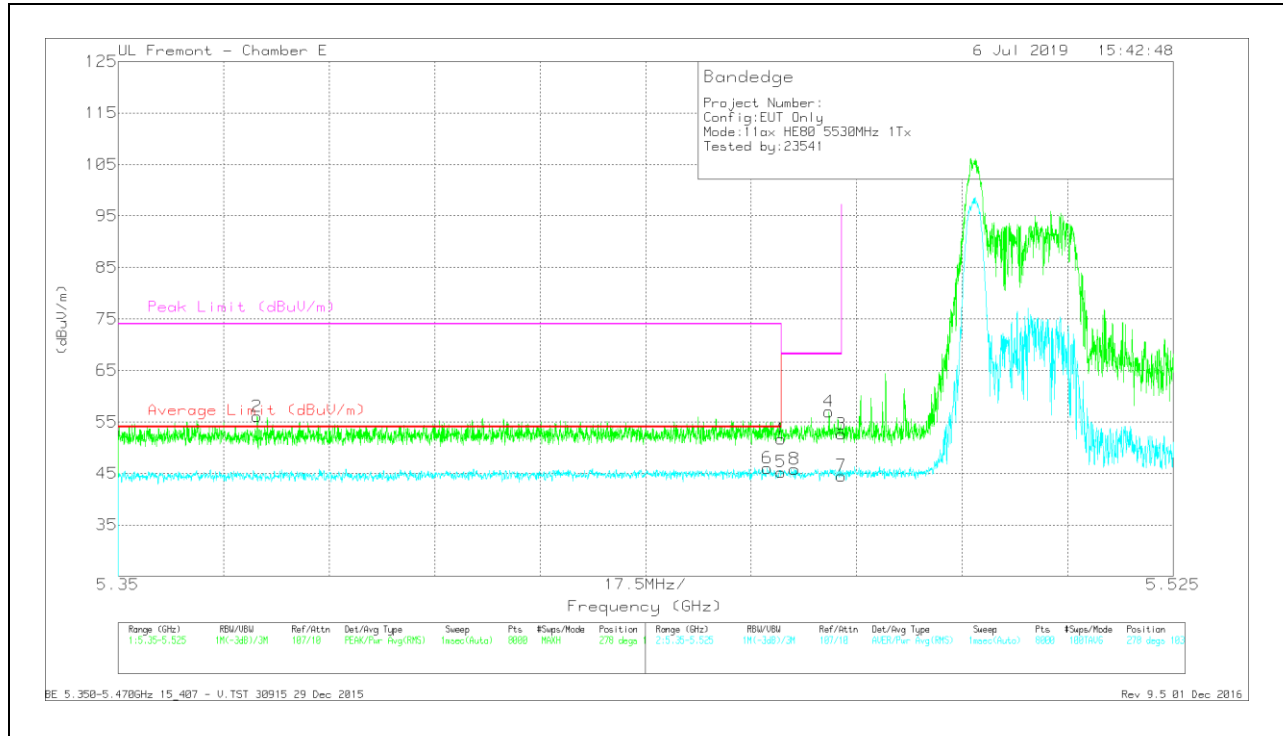

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.373	42.96	PK	34.5	-21.4	56.06	-	-	74	-17.94	278	103	V
6	* 5.458	32.7	RMS	34.6	-21.3	46	54	-8	-	-	278	103	V
1	* 5.46	38.37	PK	34.6	-21.3	51.67	-	-	74	-22.33	278	103	V
5	* 5.46	31.95	RMS	34.6	-21.3	45.25	54	-8.75	-	-	278	103	V
8	5.462	32.64	RMS	34.5	-21.3	45.84	-	-	-	-	278	103	V
4	5.468	43.79	PK	34.5	-21.3	56.99	-	-	68.2	-11.21	278	103	V
3	5.47	39.34	PK	34.6	-21.3	52.64	-	-	68.2	-15.56	278	103	V
7	5.47	31.2	RMS	34.6	-21.3	44.5	-	-	-	-	278	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE – 966 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

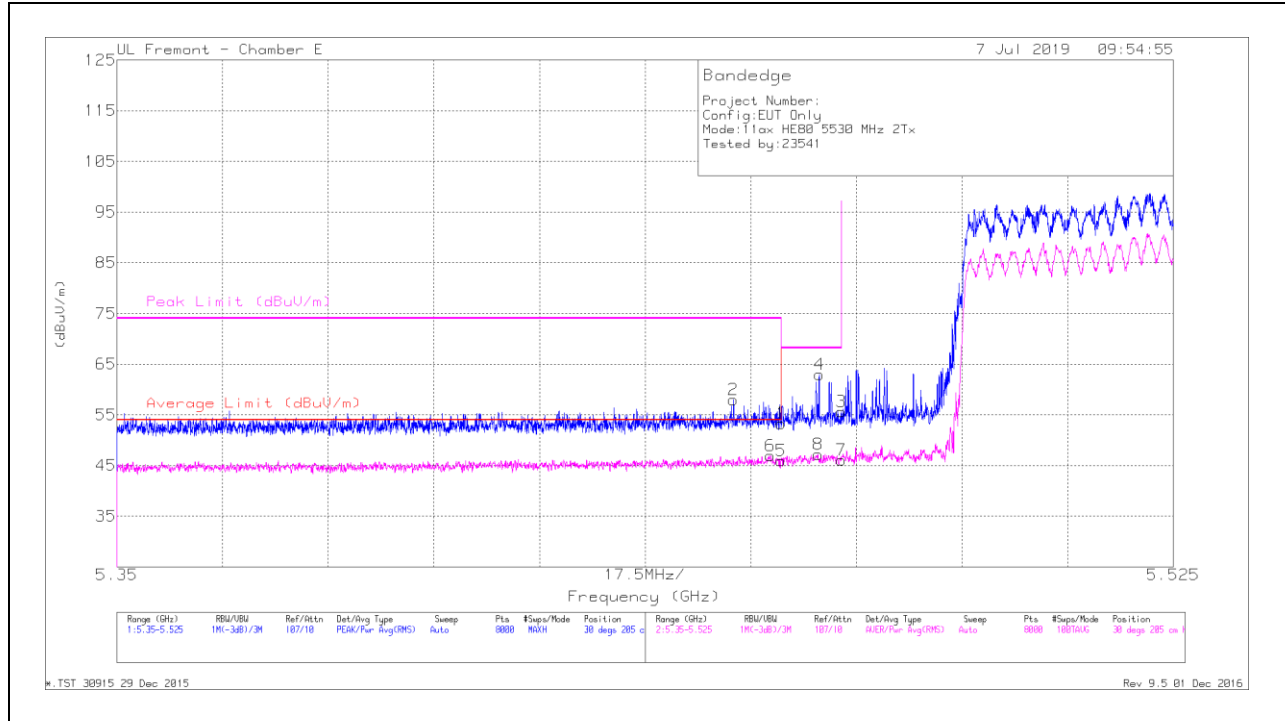


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Ampl/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.452	44.86	Pk	34.5	-21.4	57.96	-	-	74	-16.04	30	205	H
6	* 5.458	33.62	RMS	34.6	-21.3	46.92	54	-7.08	-	-	30	205	H
1	* 5.46	40.03	Pk	34.6	-21.3	53.33	-	-	74	-20.67	30	205	H
5	* 5.46	32.64	RMS	34.6	-21.3	45.94	54	-8.06	-	-	30	205	H
4	5.466	49.75	Pk	34.5	-21.3	62.95	-	-	68.2	-5.25	30	205	H
8	5.466	33.99	RMS	34.5	-21.3	47.19	-	-	-	-	30	205	H
3	5.47	42.31	Pk	34.6	-21.3	55.61	-	-	68.2	-12.59	30	205	H
7	5.47	32.73	RMS	34.6	-21.3	46.03	-	-	-	-	30	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


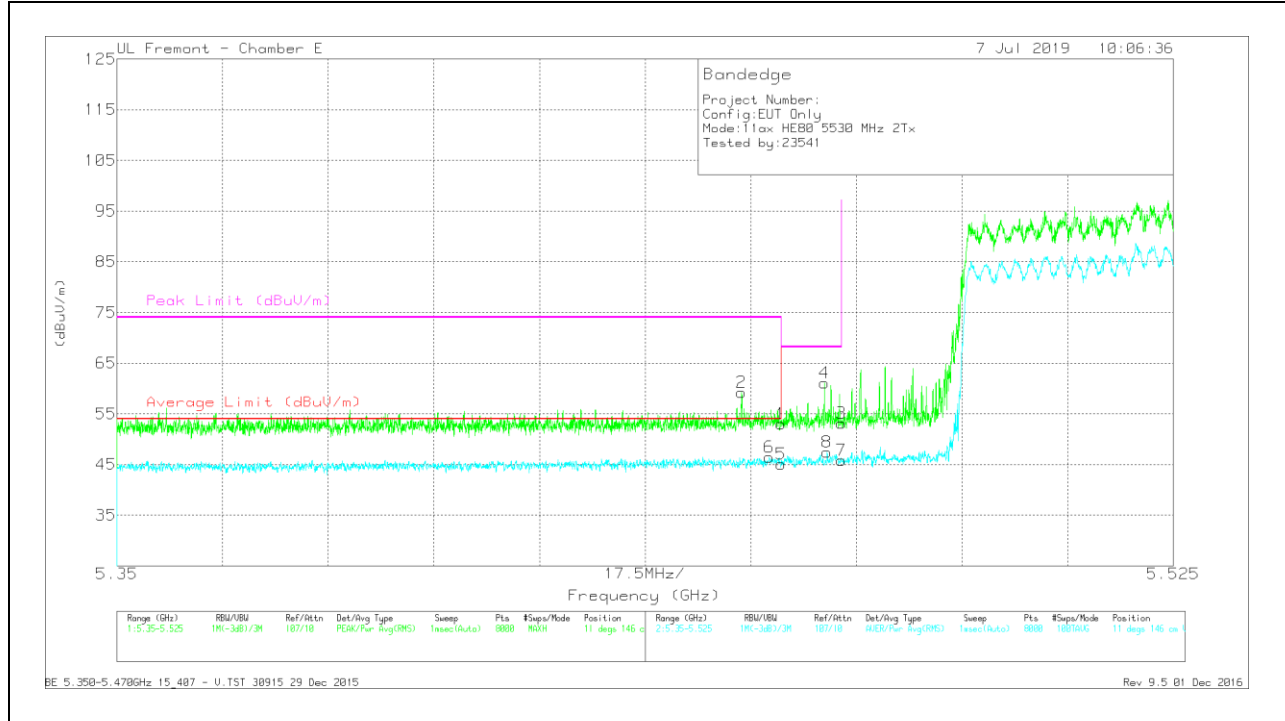


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.454	46.06	Pk	34.6	-21.4	59.26	-	-	74	-14.74	11	146	V
6	* 5.458	33.19	RMS	34.6	-21.3	46.49	54	-7.51	-	-	11	146	V
1	* 5.46	39.73	Pk	34.6	-21.3	53.03	-	-	74	-20.97	11	146	V
5	* 5.46	31.79	RMS	34.6	-21.3	45.09	54	-8.91	-	-	11	146	V
4	5.467	47.94	Pk	34.5	-21.3	61.14	-	-	68.2	-7.06	11	146	V
8	5.468	34.21	RMS	34.5	-21.3	47.41	-	-	-	-	11	146	V
3	5.47	39.82	Pk	34.6	-21.3	53.12	-	-	68.2	-15.08	11	146	V
7	5.47	32.51	RMS	34.6	-21.3	45.81	-	-	-	-	11	146	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

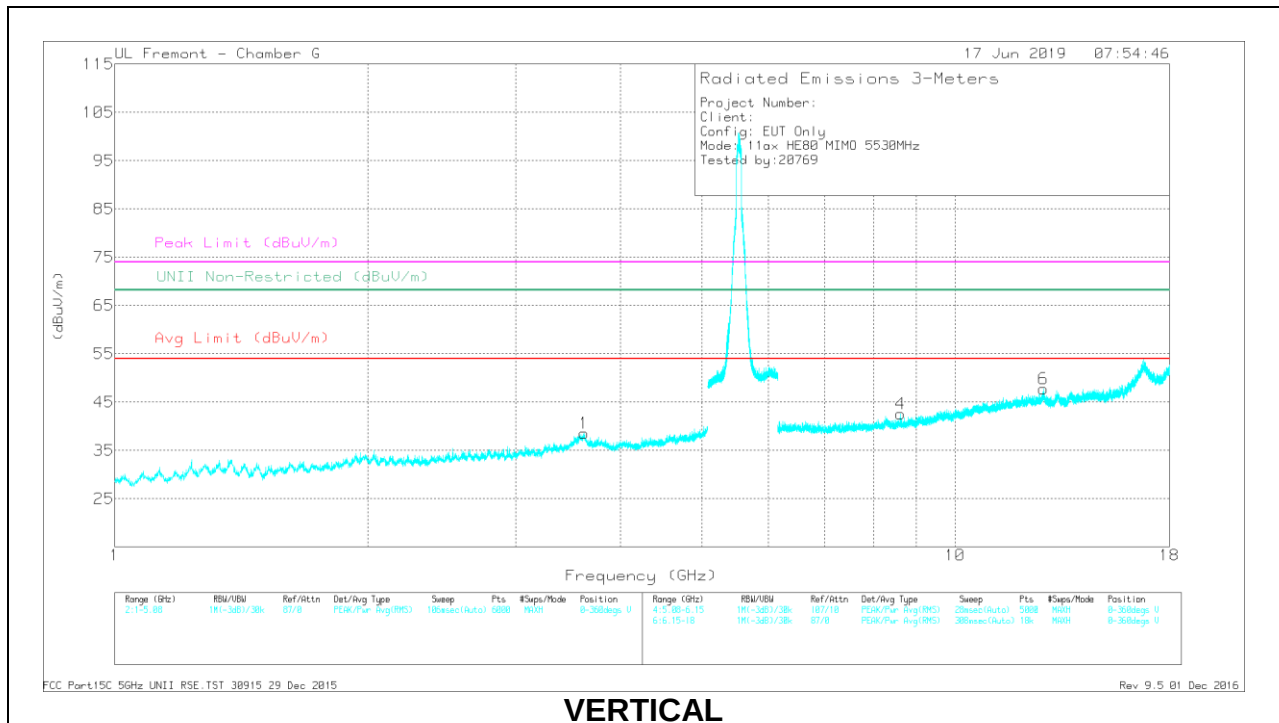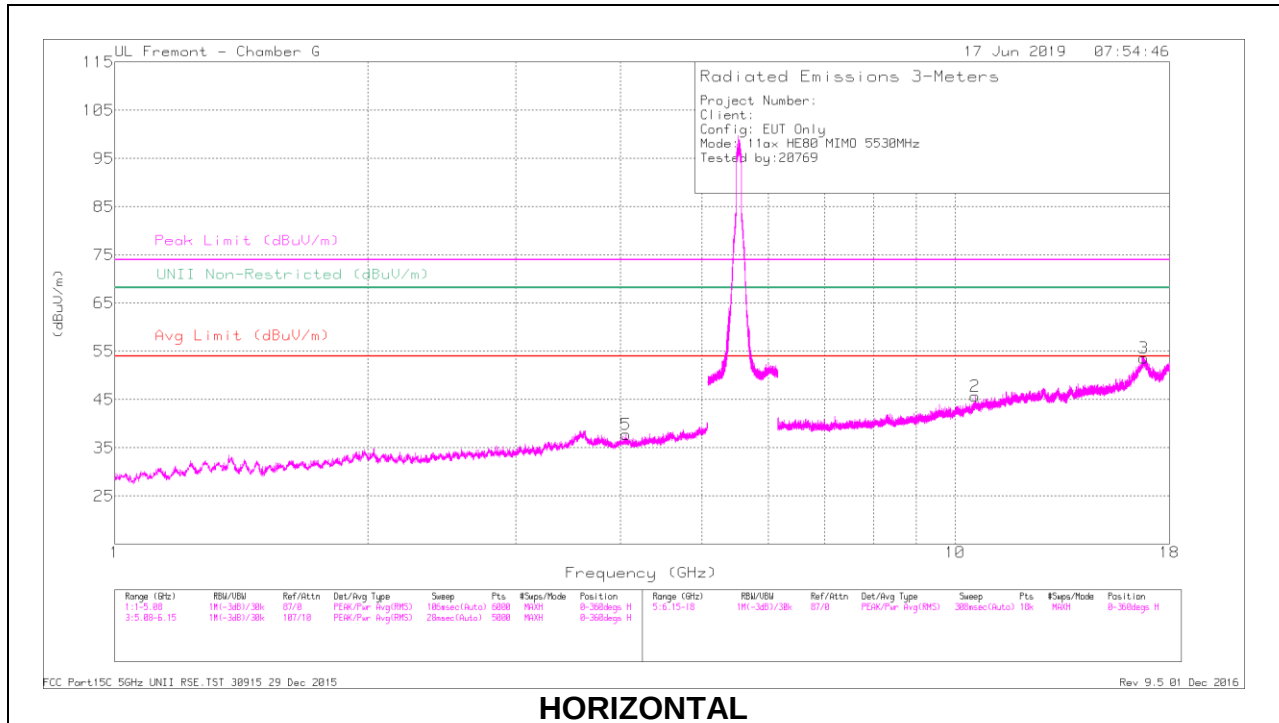

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 4.06	41.13	PK-U	33.7	-30.2	44.63	-	-	74	-29.37	-	-	359	346	H
	* 4.062	29.05	ADR	33.7	-30.2	32.55	54	-21.45	-	-	-	-	359	346	H
1	* 3.623	40.58	PK-U	35.6	-30.3	45.88	-	-	74	-28.12	-	-	246	213	V
	* 3.624	29.14	ADR	35.5	-30.3	34.34	54	-19.66	-	-	-	-	246	213	V
4	8.617	38.14	PK-U	36.2	-26	48.34	-	-	-	-	68.2	-19.86	314	197	V
2	10.566	37.45	PK-U	38.1	-23.6	51.95	-	-	-	-	68.2	-16.25	194	150	H
6	12.741	35.97	PK-U	39.6	-21.3	54.27	-	-	-	-	68.2	-13.93	265	388	V
3	16.783	35.66	PK-U	41.8	-16.9	60.56	-	-	-	-	68.2	-7.64	210	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

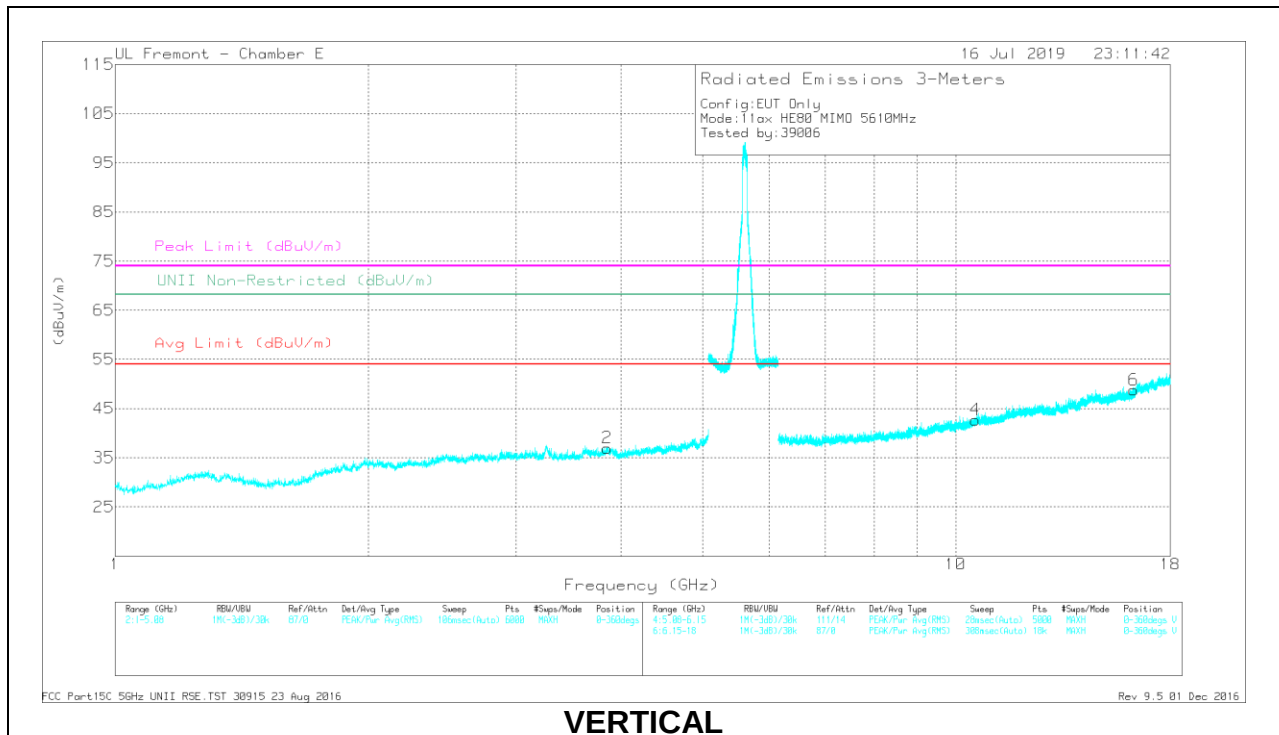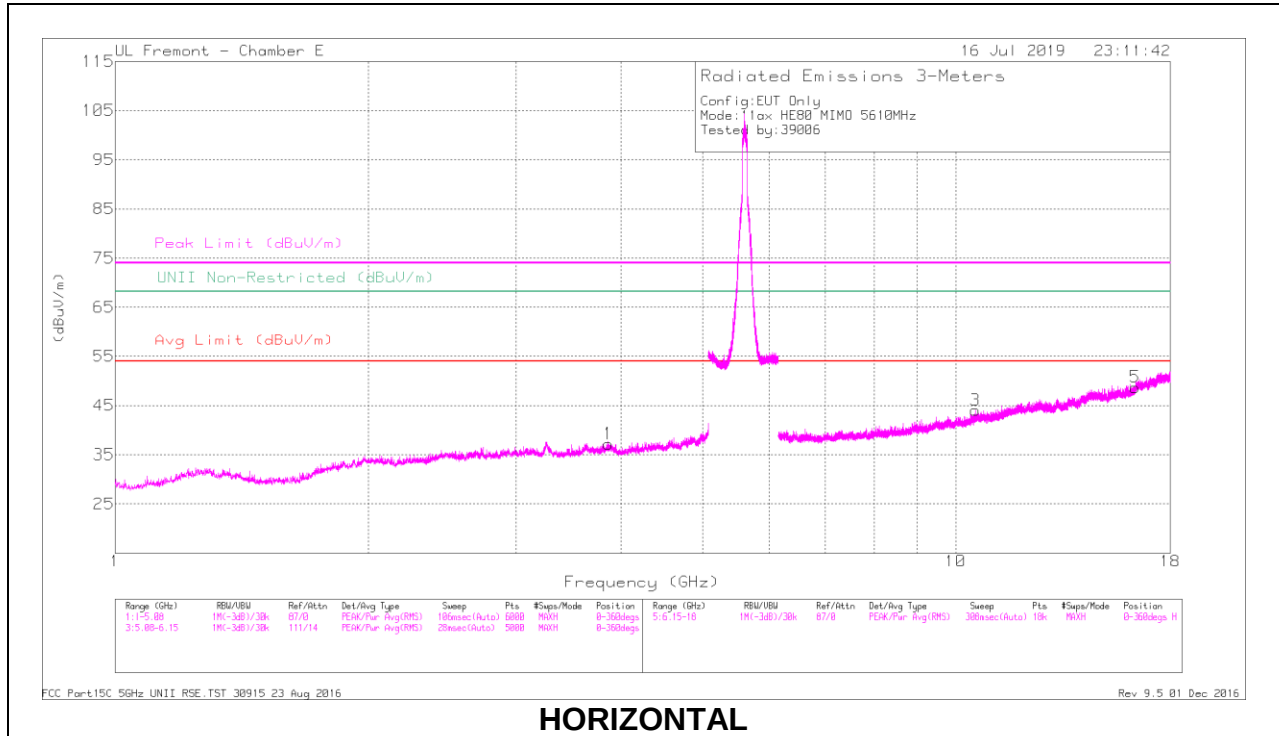

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.864	43.23	PK-U	33.4	-32.6	44.03	-	-	74	-29.97	-	-	261	150	H
	* 3.866	32.02	ADR	33.4	-32.6	32.82	54	-21.18	-	-	-	-	261	150	H
2	* 3.849	43.72	PK-U	33.4	-32.5	44.62	-	-	74	-29.38	-	-	230	147	V
	* 3.85	32.14	ADR	33.4	-32.5	33.04	54	-20.96	-	-	-	-	230	147	V
3	10.553	26.42	ADR	37.8	-25.3	38.92	-	-	-	-	-	-	311	165	H
	10.554	37.75	PK-U	37.8	-25.3	50.25	-	-	-	-	68.2	-17.95	311	165	H
4	10.557	37.18	PK-U	37.7	-25.3	49.58	-	-	-	-	68.2	-18.62	175	141	V
6	16.285	35.25	PK-U	40.6	-20.2	55.65	-	-	-	-	68.2	-12.55	130	229	V
5	16.342	35.98	PK-U	40.7	-19.9	56.78	-	-	-	-	68.2	-11.42	240	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

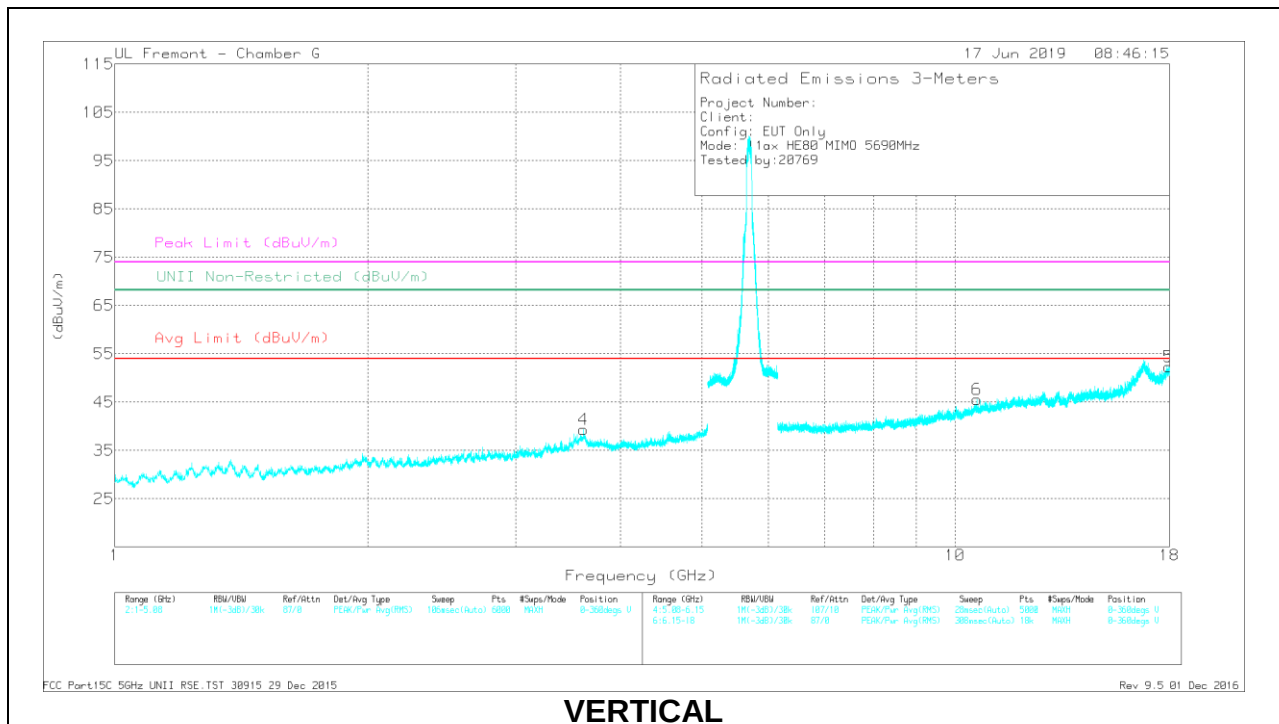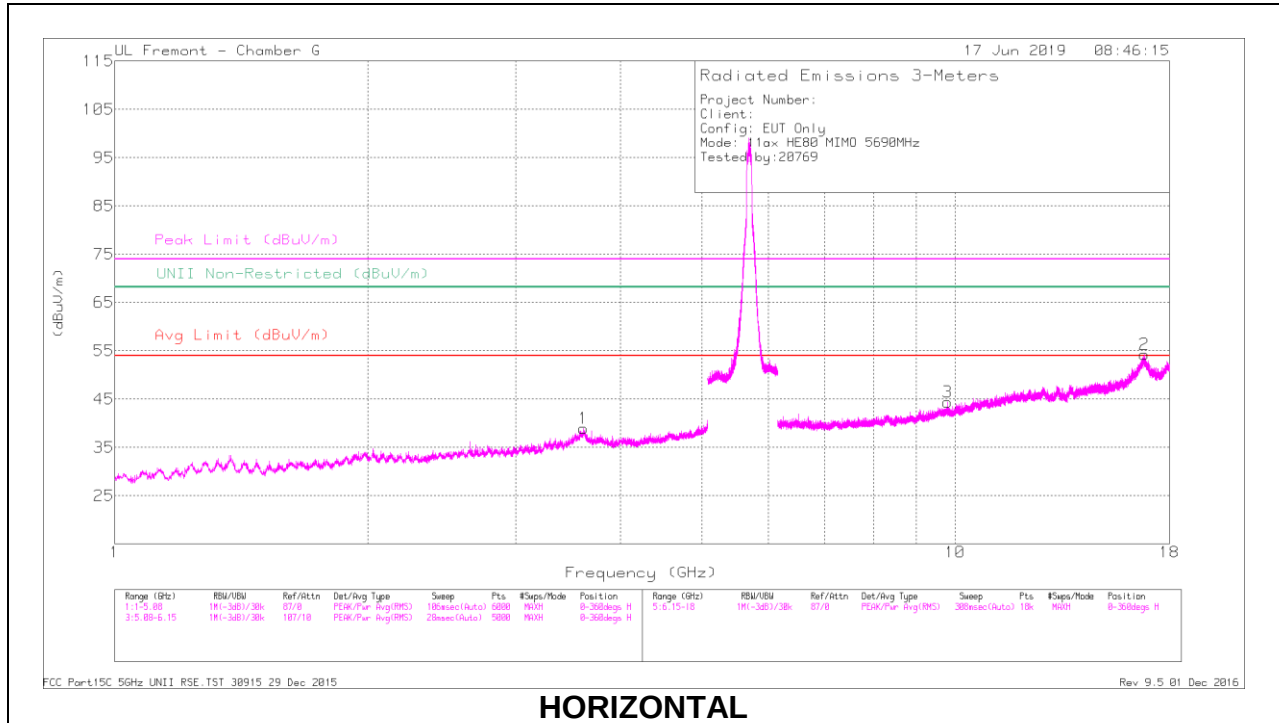

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.615	40.54	PK-U	35.6	-30.3	45.84	-	-	74	-28.16	-	-	216	146	H
	* 3.618	28.5	ADR	35.7	-30.3	33.9	54	-20.1	-	-	-	-	216	146	H
4	* 3.617	40.12	PK-U	35.7	-30.3	45.52	-	-	74	-28.48	-	-	284	184	V
	* 3.616	28.48	ADR	35.6	-30.3	33.78	54	-20.22	-	-	-	-	284	184	V
5	* 17.962	33.9	PK-U	42.6	-18	58.5	-	-	74	-15.5	-	-	187	153	V
	* 17.964	22.6	ADR	42.5	-17.9	47.2	54	-6.8	-	-	-	-	187	153	V
6	* 10.618	36.94	PK-U	38.1	-23.9	51.14	-	-	74	-22.86	-	-	247	241	V
	* 10.62	25.43	ADR	38.2	-23.9	39.73	54	-14.27	-	-	-	-	247	241	V
3	9.79	37.25	PK-U	37.4	-24.9	49.75	-	-	-	-	68.2	-18.45	54	213	H
2	16.799	36.39	PK-U	41.7	-17.3	60.79	-	-	-	-	68.2	-7.41	4	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

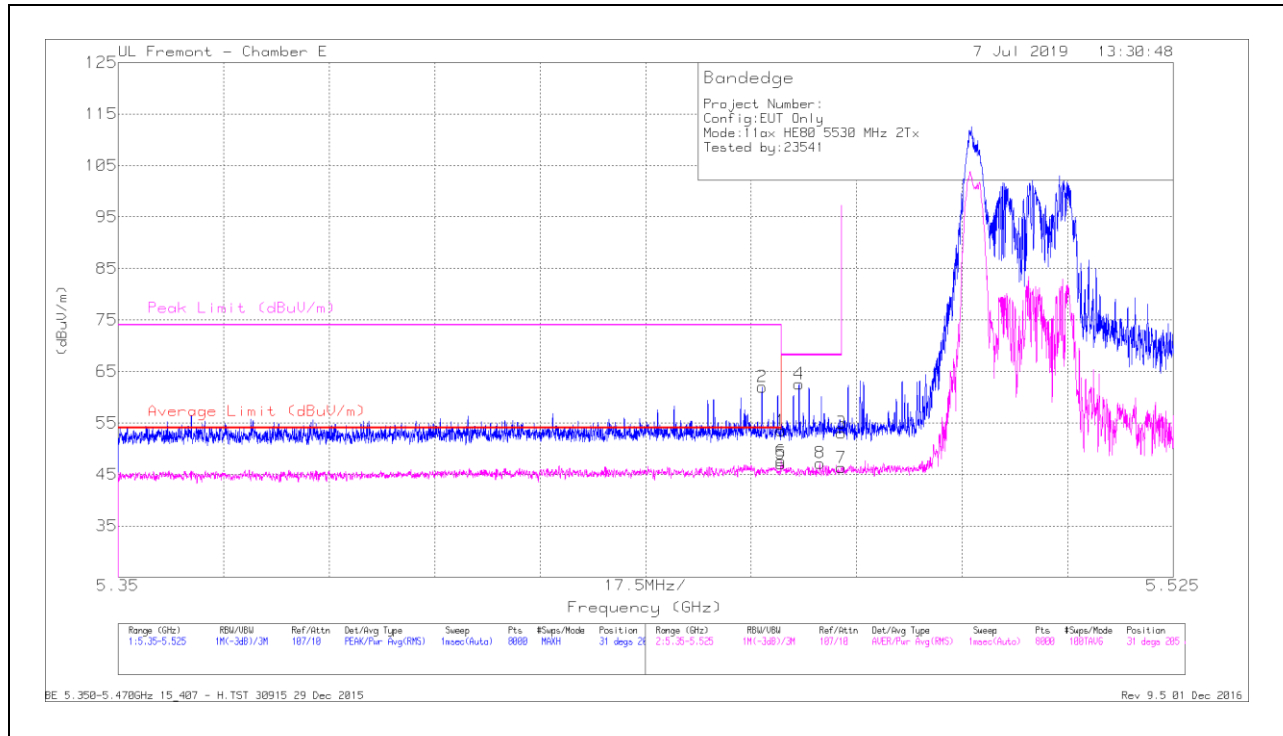


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.457	48.7	Pk	34.6	-21.3	62	-	-	74	-12	31	205	H
1	* 5.46	40.21	Pk	34.6	-21.3	53.51	-	-	74	-20.49	31	205	H
5	* 5.46	33.78	RMS	34.6	-21.3	47.08	54	-6.92	-	-	31	205	H
6	* 5.46	34.33	RMS	34.6	-21.3	47.63	54	-6.37	-	-	31	205	H
4	5.463	49.36	Pk	34.5	-21.3	62.56	-	-	68.2	-5.64	31	205	H
8	5.466	34.01	RMS	34.5	-21.3	47.21	-	-	-	-	31	205	H
3	5.47	39.73	Pk	34.6	-21.3	53.03	-	-	68.2	-15.17	31	205	H
7	5.47	32.97	RMS	34.6	-21.3	46.27	-	-	-	-	31	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

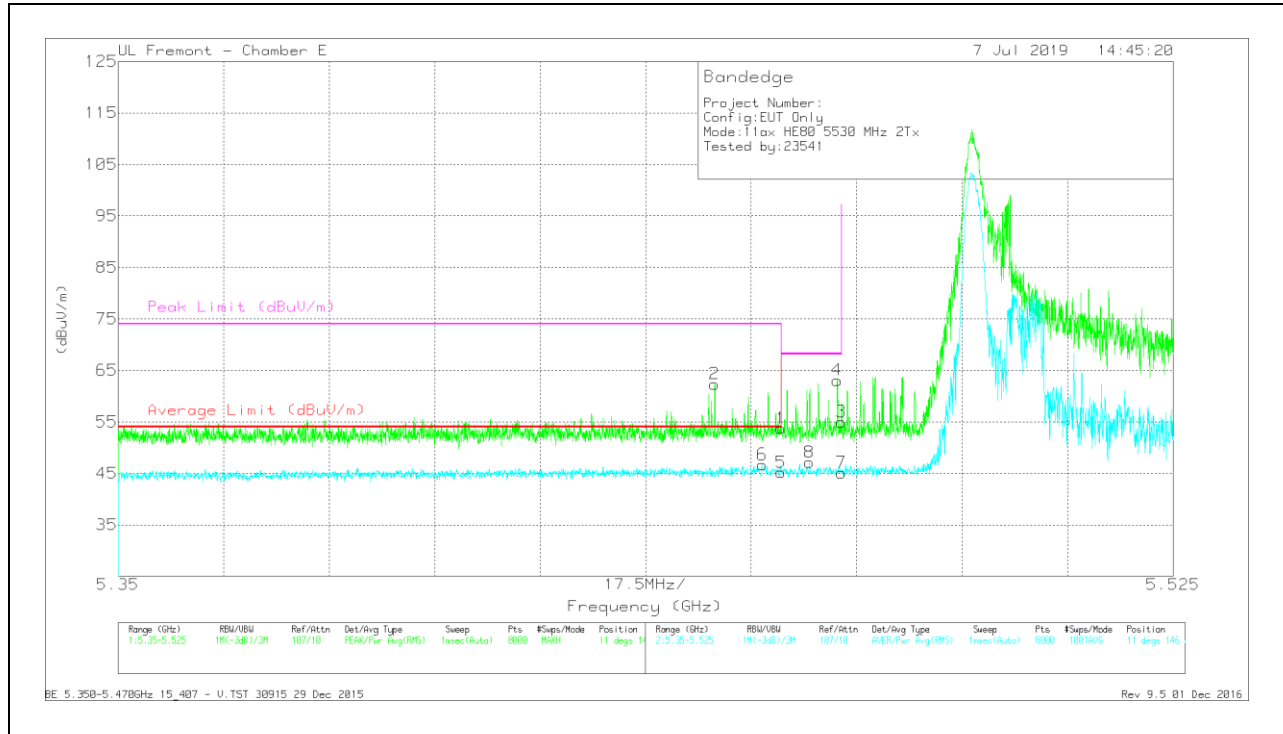

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.449	49.26	Pk	34.5	-21.4	62.36	-	-	74	-11.64	11	146	V
6	* 5.457	33.39	RMS	34.6	-21.3	46.69	54	-7.31	-	-	11	146	V
1	* 5.46	40.44	Pk	34.6	-21.3	53.74	-	-	74	-20.26	11	146	V
5	* 5.46	31.9	RMS	34.6	-21.3	45.2	54	-8.8	-	-	11	146	V
8	5.465	33.95	RMS	34.5	-21.3	47.15	-	-	-	-	11	146	V
4	5.469	49.79	Pk	34.6	-21.3	63.09	-	-	68.2	-5.11	11	146	V
3	5.47	41.71	Pk	34.6	-21.3	55.01	-	-	68.2	-13.19	11	146	V
7	5.47	31.81	RMS	34.6	-21.3	45.11	-	-	-	-	11	146	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

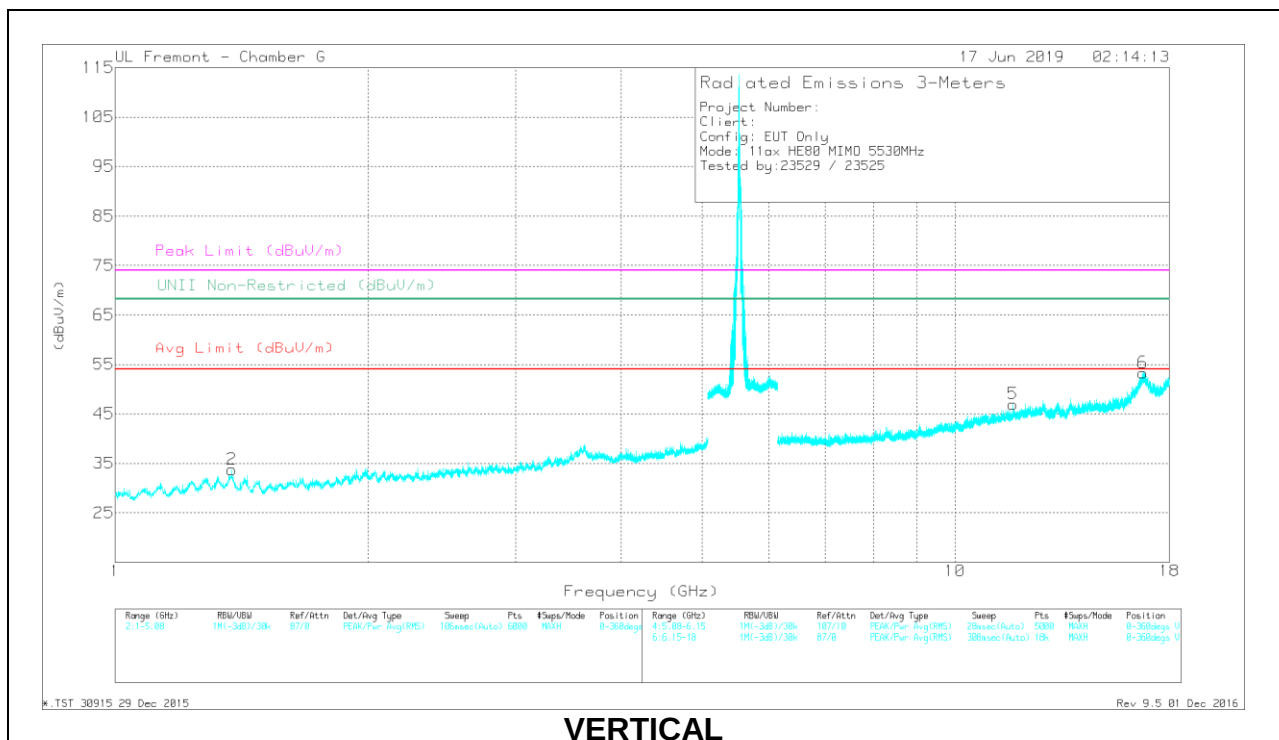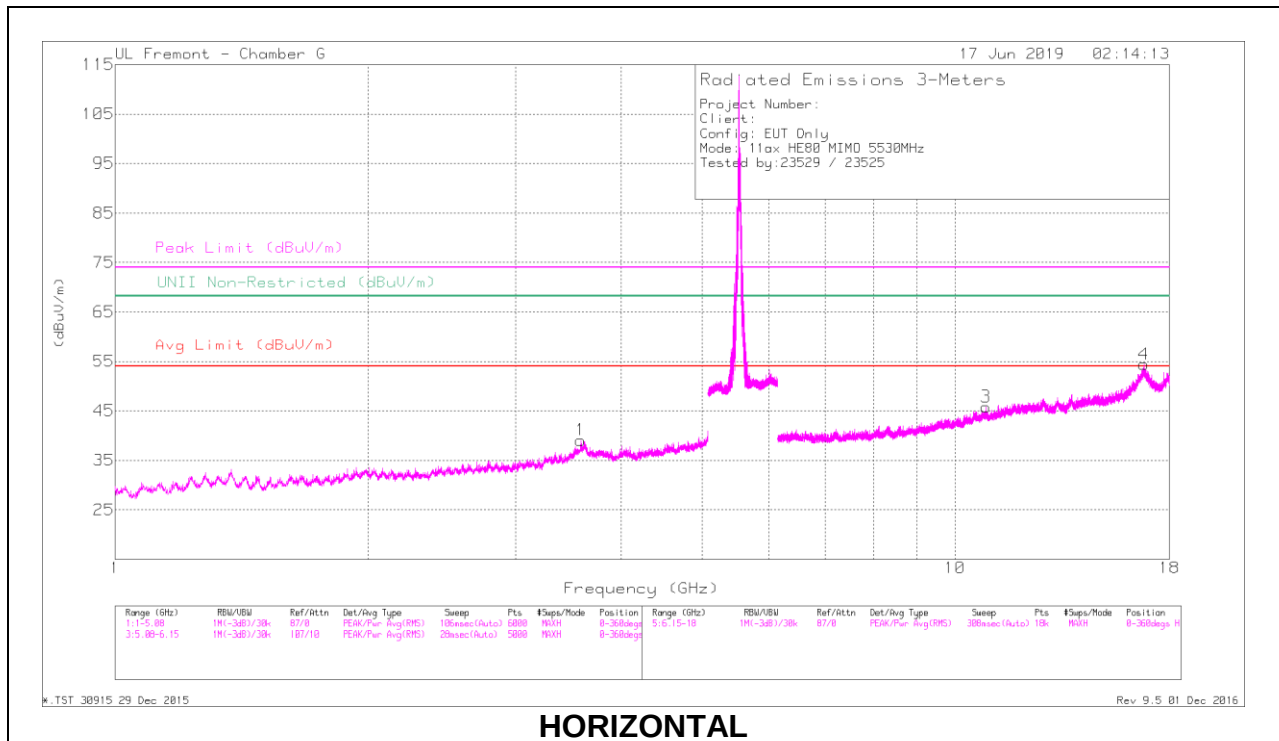

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.581	29.19	ADR	35.2	-30.1	34.29	54	-19.71	-	-	-	-	323	198	H
	* 3.581	40.13	PK-U	35.2	-30.1	45.23	-	-	74	-28.77	-	-	322	197	H
2	* 1.375	31.48	ADR	29.7	-32.1	29.08	54	-24.92	-	-	-	-	216	177	V
	* 1.376	43.02	PK-U	29.6	-32.1	40.52	-	-	74	-33.48	-	-	216	177	V
3	* 10.879	36.39	PK-U	38.3	-23.3	51.39	-	-	74	-22.61	-	-	181	254	H
	* 10.881	25.76	ADR	38.3	-23.4	40.66	54	-13.34	-	-	-	-	181	254	H
5	* 11.716	37.07	PK-U	39.2	-23.1	53.17	-	-	74	-20.83	-	-	221	296	V
	* 11.712	25.42	ADR	39.3	-23.1	41.62	54	-12.38	-	-	-	-	221	296	V
6	16.737	35.98	PK-U	41.8	-17.9	59.88	-	-	-	-	68.2	-8.32	70	263	V
4	16.784	35.98	PK-U	41.7	-16.9	60.78	-	-	-	-	68.2	-7.42	112	187	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

