



CERTIFICATION TEST REPORT

Report Number. : 12607353-E6V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2215

FCC ID : BCG-E3307A

IC : 579C-E3307A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22H, 24E, 27L AND 90S
ISED RSS-132 ISSUE 3, RSS-133 ISSUE 6 AND RSS-139 ISSUE 3

Date Of Issue:
AUGUST 16, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History


Rev.	Issue Date	Revisions	Revised By
V1	8/3/2019	Initial Review	Mengistu Mekuria
V2	8/16/2019	Address TCB Questions	Sintia Andrean

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCUANTION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. SOFTWARE AND FIRMWARE	11
5.4. MAXIMUM ANTENNA GAIN	11
5.5. WORST-CASE CONFIGURATION AND MODE	11
5.6. DESCRIPTION OF TEST SETUP	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. RF OUTPUT POWER VERIFICATION	15
7.1. GSM	15
7.2. CDMA	17
7.3. WCDMA	23
8. CONDUCTED TEST RESULTS	28
8.1. OCCUPIED BANDWIDTH	28
8.1.1. GSM	30
8.1.2. CDMA	31
8.1.3. WCDMA	32
8.2. BAND EDGE AND EMISSION MASK	33
8.2.1. GSM	35
8.2.2. CDMA	37
8.2.3. WCDMA	40
8.3. OUT OF BAND EMISSIONS	43
8.3.1. GSM	44
8.3.2. CDMA	46
8.3.3. WCDMA	49
8.4. FREQUENCY STABILITY	52
8.4.1. GSM	53
8.4.2. CDMA	54
8.4.3. WCDMA	56

8.5.	PEAK-TO-AVERAGE POWER RATIO	58
8.5.1.	GSM	59
8.5.2.	CDMA	60
8.5.3.	WCDMA	61
9.	RADIATED TEST RESULTS	62
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1	62
9.1.1.	GSM	63
9.1.2.	CDMA	67
9.1.3.	WCDMA	73
9.2.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2	79
9.2.1.	GSM	79
9.2.2.	CDMA	83
9.2.3.	WCDMA	89
9.3.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 3	95
9.3.1.	GSM	95
9.3.2.	WCDMA	97
9.4.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4	101
9.4.1.	GSM	101
9.4.2.	WCDMA	103
10.	SETUP PHOTOS	107

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA. 95014, U.S.A.		
Model	A2215		
FCC ID	BCG-E3307A		
IC	579C-E3307A		
EUT Description	SMARTPHONE		
Serial Number	C39YV06LN2RW (Conducted) and C39YT01DN2RK (Radiated)		
Date Tested	MARCH 29, 2019 to JULY 05, 2019		
Applicable Standards	FCC CFR 47 Part 22H, 24E, 27L, AND 90S ISED RSS-132 ISSUE 3, RSS-133 ISSUE 6, AND RSS-139 ISSUE 3		
Test Results	COMPLIES		
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.			
Approved & Released By:		Prepared By:	
			
Mengistu Mekuria Senior Test Engineer UL Verification Services Inc.		Lieu Nguyen Laboratory Engineer UL Verification Services Inc.	

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, Part 22, Part 24, Part 27, and Part 90, FCC KDB 971168 D01 v03r01/ D02 v02r01, KDB 412172 D01 v01r01, ANSI C63.26:2015, IC RSS-132, RSS-133 and RSS-139.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☐ Chamber I (ISED: 2324A-5)
☒ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☐ Chamber J (ISED: 2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☐ Chamber K (ISED: 2324A-1)
	☐ Chamber G (ISED:22541-4)	☐ Chamber L (ISED: 2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635
IC: RSS132§5.4; RSS133§6.4 and RSS139§6.5.

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers as follows:

GSM MODES

RSS 132 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.2	-5.00	11.5	28.20	0.661	251.26	251KGXW
	EGPRS	27.7			22.70	0.186	249.03	249KG7W
Part 22 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.2	-5.00	7.0	26.05	0.403	251.26	251KGXW
	EGPRS	27.7			20.55	0.114	249.03	249KG7W
Part 24 / RSS 133 1900MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1850.2-1909.8	GPRS	31.2	-2.50	2.0	28.70	0.741	247.26	247KGXW
	EGPRS	26.5			24.00	0.251	252.53	253KG7W

CDMA MODES

Part 90 BC10								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
817.25-822.75	1xRTT	25.7	-5.00	100.0	18.55	0.072	1272.5	1M27F9W
	1xEV-DO Rev A	25.6			18.45	0.070	1265.1	1M27F9W
RSS 132 BC0								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.7-848.31	1xRTT	25.7	-5.00	11.5	20.70	0.117	1267	1M27F9W
	1xEV-DO Rev A	25.6			20.60	0.115	1266.4	1M27F9W
Part 22 BC0								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.7-848.31	1xRTT	25.7	-5.00	7.0	18.55	0.072	1267	1M27F9W
	1xEV-DO Rev A	25.6			18.45	0.070	1266.4	1M27F9W
Part 24 / RSS 133 BC1								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1851.25-1908.75	1xRTT	25.7	-3.50	2.0	22.20	0.166	1279.8	1M28F9W
	1xEV-DO Rev A	25.6			22.10	0.162	1267.6	1M27F9W

WCDMA MODE

RSS 132 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	25.7	-5.00	11.5	20.70	0.117	4070.4	4M07F9W
	HSDPA	25.6			20.60	0.115	4060.7	4M06F9W
Part 22 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	25.7	-5.00	7.0	18.55	0.072	4070.4	4M07F9W
	HSDPA	25.6			18.45	0.070	4060.7	4M06F9W
Part 24 / RSS 133 Band 2								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1852.4-1907.6	REL 99	25.0	-2.50	2.0	22.50	0.178	4073	4M07F9W
	HSDPA	25.0			22.50	0.178	4070.9	4M07F9W
Part 27 / RSS 139 Band 4								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1712.4-1752.6	REL 99	25.0	-2.60	1.0	22.40	0.174	4065.3	4M07F9W
	HSDPA	24.9			22.30	0.170	4059.4	4M06F9W

5.3. SOFTWARE AND FIRMWARE

The EUT Firmware installed during testing was version: 19-01.1919.01_27-0.22.00-27.

5.4. MAXIMUM ANTENNA GAIN

Frequency Range (MHz)	ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	ANT 3 Gain (dBi)	ANT 4 Gain (dBi)
816 - 824	-5.0	-5.1	N/A	N/A
824 - 849	-5.0	-5.1	N/A	N/A
1850 - 1910	-3.5	-2.3	-2.5	-5.9
1710 - 1755	-3.6	-3.0	-2.6	-6.8

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated test was investigated in three orthogonal orientations X, Y and Z on Ant. 1/Ant. 2 on Cell band and on Ant. 1, Ant. 2, Ant. 3, and Ant. 4 on AWS and PCS bands. For Ant 1, It was determined that Y(Landscape) orientation was the worst case orientation for Cell, AWS and PCS bands without AC/DC adapter. For Ant 2, It was determined that Y(Landscape) orientation for Cell band and X (Flatbed) orientations for AWS and PCS bands were the worst case orientation without AC/DC adapter. For Ant 3 and Ant 4, It was determined that X (Flatbed) orientation was the worst case orientation for Cell, AWS and PCS bands without AC/DC adapter.

Based on average conducted output power measurement investigations. The worst-case antenna ports, antenna ports with highest power, was used to perform all conducted tests.

The worst-case scenario for all measurements as followed:

Worst-case modes:

- GSM GPRS
- GSM EGPRS
- CDMA 2000 1xRTT
- CDMA 2000 1xEV-DO REV. A
- WCDMA REL 99
- WCDMA HSDPA

CDMA BC10 band is supported in USA only.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GH WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop AC/DC adapter	Apple	85W MagSafe 2	C0651730MMM6P4AL
Laptop	Apple	Macbook Pro	C02PM012G3QD
Laptop	Apple	Macbook Pro	C02P52HGG085


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0m	N/A
2	USB	1	DC	Un-shielded	1.0m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6m	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2m	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0m	N/A

CONDUCTED SETUP

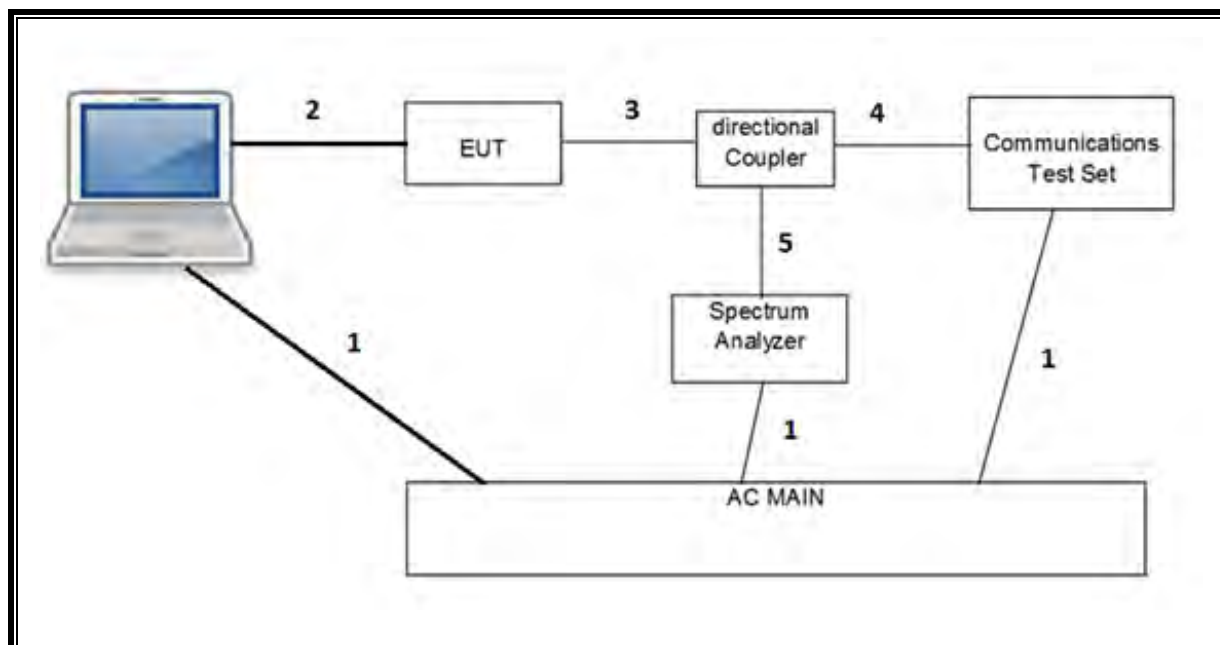

RADIATED SETUP

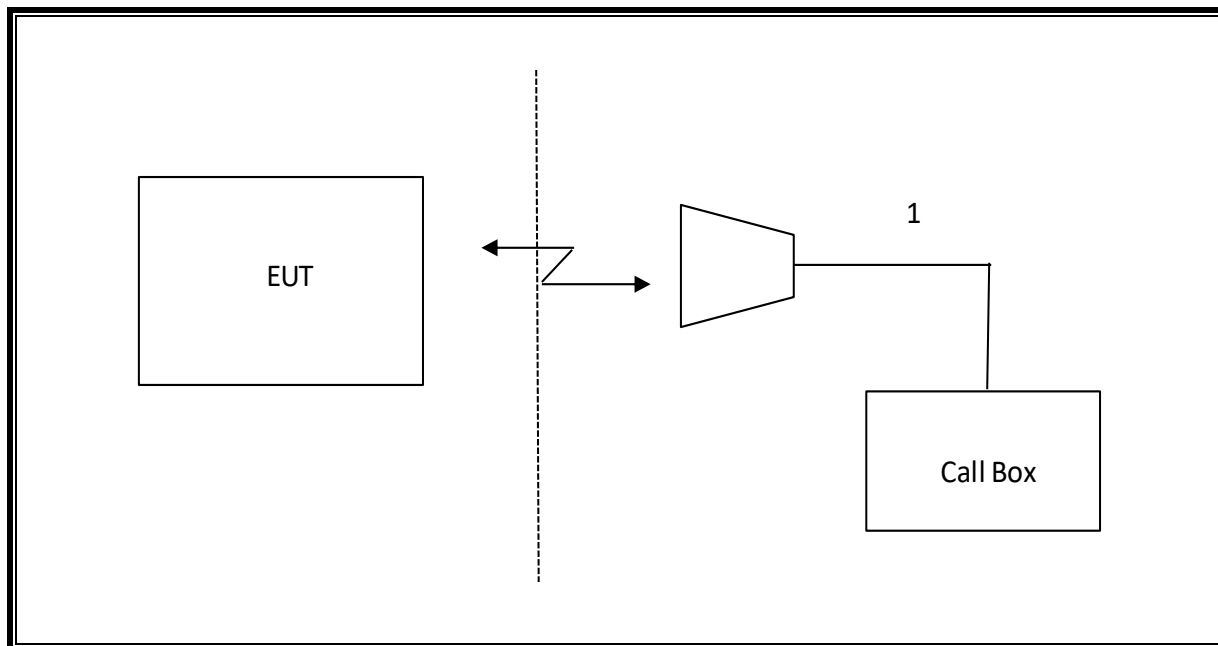

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	05/07/2020
Antenna, Horn 18-26GHz	ARA	MWH-1826/B	T447	6/16/2019
Antenna, Horn 26-40GHz	ARA	MWH-2640/B	T446	8/9/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0181574	08/01/2019
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T15	08/15/2019
Amplifier, 18-26GHz	Agilent	8449B	T404	3/23/2020
Amplifier, 26-40GHz	Miteq	TTA2640	T1804	3/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHZ	Agilent	N9030A	T905	1/24/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	01/22/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1454	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T908	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T339	01/29/2020
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T931	05/11/2020
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	PRE0180176	11/01/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T177	04/12/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T123	01/28/2020
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4440A	T198	01/30/2020
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4440A	T99	1/28/2020
Directional Coupler	KRYTAR	152610	T1536	04/27/2019
Directional Coupler	KRYTAR	152610	T1537	04/27/2019
Wireless Communications Test Set, 8960 Series 10	Agilent	E5515C	T211	05/10/2020
Filter, HPF 3.0GHz	Micro-Tronics	HPM17543	T487	12/04/2019
Filter, HPF 1.2GHz	Micro-Tronics	WHKX1.2/15G-6ST	T1182	05/19/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T459	07/25/2019
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	02/16/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T1871	02/18/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T921	02/18/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T376	02/21/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T958	02/20/2020
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	08/15/2019
Power Meter, P-series single channel	Keysight	N1911A	T1268	01/31/2020
Power Sensor	Keysight	N1921A	T1228	07/10/2019
Antenna, Horn 1-18GHz	ETS Lindgren	T3117	T346	05/14/2020
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0077974	05/13/2020
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T1616	10/18/2019
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 9.5, April 26, 2016	
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017	

NOTES:

- For equipment listed above that had a calibration due during the testing period, its use was paused to allow for calibration.

7. RF OUTPUT POWER VERIFICATION

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

RESULT

GSM 850

ID:	12491	Date:	7/31/2019
-----	-------	-------	-----------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)			
			ANT 1		ANT 2	
			1 slot	2 slots	1 slot	2 slots
850.0	128	824.2	33.2	32.2	31.7	30.7
	190	836.6	33.2	32.2	31.5	30.6
	251	848.8	33.2	32.2	31.5	30.5

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)			
			ANT 1		ANT 2	
			1 slot	2 slots	1 slot	2 slots
850.0	128	824.2	27.7	26.7	25.7	24.7
	190	836.6	27.7	26.0	25.0	24.5
	251	848.8	27.3	26.6	25.2	24.2

GSM 1900

ID:	12491	Date:	7/31/2019
-----	-------	-------	-----------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)							
			ANT 1		ANT 2		ANT 3		ANT 4	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
1900.0	512	1850.2	31.6	30.7	29.2	26.5	31.2	31.0	29.0	25.7
	661	1880.0	31.7	30.6	29.0	26.3	31.3	30.5	28.8	26.0
	810	1909.8	31.5	30.6	29.1	26.4	31.2	30.6	28.7	25.8

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)							
			ANT 1		ANT 2		ANT 3		ANT 4	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
1900.0	512	1850.2	26.7	25.6	24.2	23.2	26.5	26.0	25.0	24.0
	661	1880.0	26.6	25.7	23.8	23.2	26.2	25.6	24.9	23.7
	810	1909.8	26.4	24.8	24.2	23.1	26.1	25.2	24.8	23.3

7.2. CDMA

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
--------------------	---------------------

CDMA2000 Mobile Test	B.15.18, L
----------------------	------------

- Protocol Rev > 6 (IS-2000-0)
- System ID: 18; NID: 65535, Reg. Ch. #: 610 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

1xEV-DO - Release 0 (REL 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

1xEV-DO - Revision A (REV A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
 - PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters
 - Sector ID > 00000000: 00000000: 00000000: 00000000
 - Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
 - ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
 - PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
 - Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
 - ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

CMW500

1x Advanced Setup Procedures used to establish the test signals

Call box setup procedure

- Protocol Rev > 6 (IS-2000-0)
- System ID: 331; NID: 65535, Reg. Ch. #.:
- Radio Config (RC) > Fwd11,Rvs8
- Service Option (SO) Setup > SO75 (Loopback)
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)
- Reverse Power Control Mode: 00-200 to 400 bps
- Smart blanking was disabled.

1xEV-DO Rev. B Setup Procedures used to establish the test signals

Call box setup procedure

- CMW 500 Signal Generator > 1xEV-DO Taskbar Enable
- CMW 500 1xEV-DO Signaling Configuration Window >
- 1xEV-DO Signaling On Window:
 - Under Access Network Control:
 - Band Class: BC0: US Cellular
 - RF Channel: 31
 - 1xEV-DO Power: -70 dBm
 - Release B
- 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency
For Two Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	31	0
Carrier [1]	1013	982

- Under Carrier Configuration: RF Pilot

	<u>Carrier Sector</u>	<u>Active on AN</u>	<u>Assigned to AT</u>
Pilot [0]	C0/S0	✓	✓
	CA/S1	✓	✓

For Three Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

- Under Carrier Configuration: RF Pilot

	<u>Carrier Sector</u>	<u>Active on AN</u>	<u>Assigned to AT</u>
Pilot [0]	C0/S0	✓	✓
Pilot [1]	C1/S1	✓	✓
Pilot [2]	C2/S2	✓	✓

- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULT

CDMA BC10

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode	Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Power (dBm)	
						ANT 1	ANT 2
BC10 (800MHz)	1xRTT	RC1	2 (Loopback)	450	817.25	25.5	24.5
				560	820.00	25.6	24.5
				670	822.75	25.6	24.4
			55 (Loopback)	450	817.25	25.5	24.5
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
		RC2	9 (Loopback)	450	817.25	25.5	24.5
				560	820.00	25.7	24.5
				670	822.75	25.6	24.5
			55 (Loopback)	450	817.25	25.5	24.4
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
		RC3	2 (Loopback)	450	817.25	25.4	24.4
				560	820.00	25.6	24.4
				670	822.75	25.6	24.4
			55 (Loopback)	450	817.25	25.5	24.5
				560	820.00	25.5	24.4
				670	822.75	25.5	24.4
			32 (+ F-SCH)	450	817.25	25.5	24.5
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
			32 (+ SCH)	450	817.25	25.2	24.4
				560	820.00	25.3	24.2
				670	822.75	25.4	24.3
		RC4	2 (Loopback)	450	817.25	25.5	24.4
				560	820.00	25.6	24.4
				670	822.75	25.6	24.4
			55 (Loopback)	450	817.25	25.4	24.4
				560	820.00	25.5	24.4
				670	822.75	25.6	24.4
			32 (+ F-SCH)	450	817.25	25.5	24.5
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
			32 (+ SCH)	450	817.25	25.2	24.4
				560	820.00	25.4	24.3
				670	822.75	25.3	24.3
		RC5	9 (Loopback)	450	817.25	25.5	24.4
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
			55 (Loopback)	450	817.25	25.6	24.5
				560	820.00	25.6	24.5
				670	822.75	25.6	24.5
	1xAdvanced	RC11	2 (Loopback)	450	817.25	25.6	24.3
				560	820.00	25.6	24.4
				670	822.75	25.6	24.5
			75 (Loopback)	450	817.25	25.6	24.4
				560	820.00	25.6	24.4
				670	822.75	25.6	24.4
			32 (+ F-SCH)	450	817.25	25.6	24.3
				560	820.00	25.6	24.4
				670	822.75	25.6	24.4
			32 (+ SCH)	450	817.25	25.4	24.3
				560	820.00	25.4	24.3
				670	822.75	25.4	24.3
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	450	817.25	25.3	24.3
				560	820.00	25.4	24.3
				670	822.75	25.5	24.3
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	450	817.25	25.5	24.2
				560	820.00	25.6	24.1
				670	822.75	25.4	24.1

CDMA BC0

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode	Radio Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
BC0 (850MHz)	1xRTT	RC1	2 (Loopback)	1013	824.70	25.6	24.4
				384	836.52	25.5	24.5
				777	848.31	25.4	24.3
			55 (Loopback)	1013	824.70	25.6	24.3
				384	836.52	25.5	24.5
				777	848.31	25.4	24.4
		RC2	9 (Loopback)	1013	824.70	25.6	24.3
				384	836.52	25.7	24.5
				777	848.31	25.6	24.3
			55 (Loopback)	1013	824.70	25.6	24.3
				384	836.52	25.5	24.5
				777	848.31	25.4	24.4
		RC3	2 (Loopback)	1013	824.70	25.5	24.3
				384	836.52	25.4	24.4
				777	848.31	25.4	24.3
			55 (Loopback)	1013	824.70	25.5	24.3
				384	836.52	25.5	24.4
				777	848.31	25.3	24.3
			32 (+ F-SCH)	1013	824.70	25.6	24.4
				384	836.52	25.5	24.5
				777	848.31	25.4	24.4
			32 (+ SCH)	1013	824.70	25.3	24.1
				384	836.52	25.2	24.3
				777	848.31	25.1	24.2
		RC4	2 (Loopback)	1013	824.70	25.6	24.2
				384	836.52	25.4	24.4
				777	848.31	25.3	24.3
			55 (Loopback)	1013	824.70	25.5	24.2
				384	836.52	25.4	24.4
				777	848.31	25.4	24.3
			32 (+ F-SCH)	1013	824.70	25.6	24.5
				384	836.52	25.5	24.5
				777	848.31	25.4	24.4
			32 (+ SCH)	1013	824.70	25.3	24.1
				384	836.52	25.1	24.3
				777	848.31	25.1	24.1
		RC5	9 (Loopback)	1013	824.70	25.6	24.4
				384	836.52	25.6	24.5
				777	848.31	25.5	24.4
			55 (Loopback)	1013	824.70	25.6	24.4
				384	836.52	25.5	24.5
				777	848.31	25.4	24.4
	1xAdvanced	RC11	2 (Loopback)	1013	824.70	25.6	24.2
				384	836.52	25.6	24.3
				777	848.31	25.6	24.2
			75 (Loopback)	1013	824.70	25.6	24.3
				384	836.52	25.5	24.3
				777	848.31	25.6	24.3
			32 (+ F-SCH)	1013	824.70	25.6	24.3
				384	836.52	25.6	24.3
				777	848.31	25.6	24.3
			32 (+ SCH)	1013	824.70	25.5	24.1
				384	836.52	25.3	24.2
				777	848.31	25.5	24.1
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	1013	824.70	25.4	24.1
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	384	836.52	25.5	24.1
				777	848.31	25.2	24.4
				1013	824.70	25.3	24.2
				384	836.52	25.6	24.3
				777	848.31	25.1	24.2

CDMA BC1

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode	Radio Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
BC1 (1900MHz)	1xRTT	RC1	2 (Loopback)	25	1851.25	25.6	20.5
				600	1880.00	25.4	20.5
				1175	1908.75	25.2	20.5
			55 (Loopback)	25	1851.25	25.3	20.5
				600	1880.00	25.4	20.5
				1175	1908.75	25.4	20.5
		RC2	9 (Loopback)	25	1851.25	25.7	20.5
				600	1880.00	25.4	20.5
				1175	1908.75	25.6	20.5
			55 (Loopback)	25	1851.25	25.3	20.5
				600	1880.00	25.4	20.5
				1175	1908.75	25.2	20.5
		RC3	2 (Loopback)	25	1851.25	25.3	20.4
				600	1880.00	25.3	20.4
				1175	1908.75	25.2	20.4
			55 (Loopback)	25	1851.25	25.2	20.5
				600	1880.00	25.3	20.4
				1175	1908.75	25.1	20.4
			32 (+ F-SCH)	25	1851.25	25.5	20.4
				600	1880.00	25.6	20.5
				1175	1908.75	25.5	20.4
			32 (+ SCH)	25	1851.25	25.1	20.0
				600	1880.00	25.3	20.1
				1175	1908.75	25.2	20.1
		RC4	2 (Loopback)	25	1851.25	25.3	20.4
				600	1880.00	25.4	20.5
				1175	1908.75	25.2	20.4
			55 (Loopback)	25	1851.25	25.3	20.5
				600	1880.00	25.3	20.4
				1175	1908.75	25.1	20.4
			32 (+ F-SCH)	25	1851.25	25.5	20.4
				600	1880.00	25.6	20.5
				1175	1908.75	25.5	20.4
			32 (+ SCH)	25	1851.25	25.2	20.0
				600	1880.00	25.2	20.1
				1175	1908.75	25.2	20.1
		RC5	9 (Loopback)	25	1851.25	25.4	20.5
				600	1880.00	25.5	20.5
				1175	1908.75	25.3	20.5
			55 (Loopback)	25	1851.25	25.4	20.5
				600	1880.00	25.4	20.5
				1175	1908.75	25.3	20.5
	1xAdvanced	RC11	2 (Loopback)	25	1851.25	25.5	19.5
				600	1880.00	25.4	19.6
				1175	1908.75	25.4	19.6
			75 (Loopback)	25	1851.25	25.5	19.5
				600	1880.00	25.5	19.6
				1175	1908.75	25.5	19.6
			32 (+ F-SCH)	25	1851.25	25.5	19.5
				600	1880.00	25.5	19.6
				1175	1908.75	25.5	19.6
			32 (+ SCH)	25	1851.25	25.5	20.4
				600	1880.00	25.4	20.4
				1175	1908.75	25.4	20.4
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	25	1851.25	25.4	19.9
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	600	1880	25.5	20.0
				1175	1908.75	25.5	20.1
				25	1851.25	25.4	19.8
				600	1880	25.6	19.9
				1175	1908.75	25.5	19.8

7.3. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA REL 6

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

DUAL CARRIER HSDPA (DC-HSDPA (REL 8, CAT 24))

The following 4 Sub-tests for DC-HSDPA were completed according to Release 8 procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings are illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

RESULT

WCDMA BAND 5

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	25.7	24.5
			4183	836.6	N/A	25.5	24.5
			4233	846.6	N/A	25.5	24.5
	HSDPA	Subtest 1	4132	826.4	0	25.6	24.5
			4183	836.6	0	25.5	24.5
			4233	846.6	0	25.4	24.4
		Subtest 2	4132	826.4	0	25.2	24.1
			4183	836.6	0	25.1	24.1
			4233	846.6	0	25.0	24.0
		Subtest 3	4132	826.4	0.5	24.8	23.7
			4183	836.6	0.5	24.7	23.6
			4233	846.6	0.5	24.7	23.6
		Subtest 4	4132	826.4	0.5	24.6	23.4
			4183	836.6	0.5	24.4	23.3
			4233	846.6	0.5	24.4	23.4
	HSUPA	Subtest 1	4132	826.4	0	25.3	24.1
			4183	836.6	0	25.2	24.0
			4233	846.6	0	25.1	24.0
		Subtest 2	4132	826.4	2	24.1	23.0
			4183	836.6	2	24.0	23.0
			4233	846.6	2	23.9	23.0
		Subtest 3	4132	826.4	1	24.9	24.1
			4183	836.6	1	24.8	24.1
			4233	846.6	1	24.8	24.1
		Subtest 4	4132	826.4	2	24.4	23.3
			4183	836.6	2	24.3	23.3
			4233	846.6	2	24.1	23.2
		Subtest 5	4132	826.4	0	25.1	23.9
			4183	836.6	0	24.9	23.9
			4233	846.6	0	24.8	23.9
	DC-HSDPA	Subtest 1	4132	826.4	0	25.5	24.5
			4183	836.6	0	25.5	24.5
			4233	846.6	0	25.4	24.4
		Subtest 2	4132	826.4	0	25.5	24.4
			4183	836.6	0	25.5	24.4
			4233	846.6	0	25.3	24.3
		Subtest 3	4132	826.4	0.5	25.2	24.1
			4183	836.6	0.5	25.1	24.0
			4233	846.6	0.5	25.0	23.9
		Subtest 4	4132	826.4	0.5	25.2	24.1
			4183	836.6	0.5	25.1	24.0
			4233	846.6	0.5	24.9	23.9

WCDMA BAND 2

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)			
						ANT 1	ANT 2	ANT 3	ANT 4
W-CDMA Band 2 (1900MHz)	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	25.6	20.2	24.7	19.7
			9400	1880.0	N/A	25.7	20.1	25.0	19.9
			9538	1907.6	N/A	25.6	20.3	24.9	19.9
	HSDPA	Subtest 1	9262	1852.4	0	25.6	20.1	24.7	19.7
			9400	1880.0	0	25.7	20.1	24.9	19.9
			9538	1907.6	0	25.7	20.3	24.9	20.0
		Subtest 2	9262	1852.4	0	25.1	19.7	24.2	19.5
			9400	1880.0	0	25.3	19.7	24.5	19.7
			9538	1907.6	0	25.2	19.9	24.4	19.7
		Subtest 3	9262	1852.4	0.5	24.8	19.3	23.9	19.3
			9400	1880.0	0.5	24.9	19.4	24.2	19.4
			9538	1907.6	0.5	24.8	19.5	24.0	19.5
		Subtest 4	9262	1852.4	0.5	24.4	19.0	23.6	19.0
			9400	1880.0	0.5	24.6	19.1	23.9	19.2
			9538	1907.6	0.5	24.6	19.2	23.8	19.2
	HSUPA	Subtest 1	9262	1852.4	0	24.8	19.9	24.0	19.4
			9400	1880.0	0	24.9	19.8	24.2	19.7
			9538	1907.6	0	24.9	20.0	24.1	19.7
		Subtest 2	9262	1852.4	2	22.9	17.7	22.1	17.3
			9400	1880.0	2	23.1	17.7	22.3	17.5
			9538	1907.6	2	23.1	17.8	22.3	17.4
		Subtest 3	9262	1852.4	1	23.9	18.5	23.3	18.2
			9400	1880.0	1	23.9	18.5	23.5	18.5
			9538	1907.6	1	23.9	18.6	23.4	18.4
		Subtest 4	9262	1852.4	2	23.2	17.9	22.3	17.5
			9400	1880.0	2	23.3	17.9	22.6	17.8
			9538	1907.6	2	23.2	18.0	22.5	17.7
		Subtest 5	9262	1852.4	0	24.9	19.5	24.1	19.2
			9400	1880.0	0	25.0	19.5	24.3	19.4
			9538	1907.6	0	25.0	19.9	24.2	19.4
	DC-HSDPA	Subtest 1	9262	1852.4	0	25.6	20.3	24.7	19.7
			9400	1880.0	0	25.7	20.3	25.0	20.0
			9538	1907.6	0	25.6	20.5	24.9	20.0
		Subtest 2	9262	1852.4	0	25.4	20.2	24.6	19.7
			9400	1880.0	0	25.6	20.2	24.8	20.0
			9538	1907.6	0	25.5	20.4	24.7	20.0
		Subtest 3	9262	1852.4	0.5	25.1	20.0	24.3	19.6
			9400	1880.0	0.5	25.3	20.0	24.6	19.7
			9538	1907.6	0.5	25.2	20.1	24.5	19.7
		Subtest 4	9262	1852.4	0.5	25.1	19.9	24.3	19.5
			9400	1880.0	0.5	25.3	19.9	24.5	19.7
			9538	1907.6	0.5	25.2	20.1	24.4	19.7

WCDMA BAND 4

ID:	39004	Date:	4/30/2019
------------	-------	--------------	-----------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)			
						ANT 1	ANT 2	ANT 3	ANT 4
W-CDMA Band 4 (1700MHz)	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	25.6	22.0	24.7	21.9
			1413	1732.6	N/A	25.6	21.9	24.9	22.0
			1513	1752.6	N/A	25.7	21.9	25.0	22.2
	HSDPA	Subtest 1	1312	1712.4	0	25.6	21.9	24.7	21.9
			1413	1732.6	0	25.6	22.0	24.9	22.0
			1513	1752.6	0	25.7	21.8	24.9	22.2
		Subtest 2	1312	1712.4	0	25.2	21.4	24.3	21.6
			1413	1732.6	0	25.2	21.4	24.5	21.7
			1513	1752.6	0	25.2	21.3	24.5	21.9
		Subtest 3	1312	1712.4	0.5	24.8	21.0	23.9	21.4
			1413	1732.6	0.5	24.8	21.0	24.2	21.4
			1513	1752.6	0.5	24.8	21.0	24.1	21.7
		Subtest 4	1312	1712.4	0.5	24.5	20.8	23.6	21.1
			1413	1732.6	0.5	24.6	20.8	23.9	21.2
			1513	1752.6	0.5	24.5	20.7	23.8	21.5
	HSUPA	Subtest 1	1312	1712.4	0	24.9	21.6	24.0	21.6
			1413	1732.6	0	24.9	21.6	24.2	21.7
			1513	1752.6	0	24.9	21.5	24.1	21.9
		Subtest 2	1312	1712.4	2	23.0	19.4	22.1	19.6
			1413	1732.6	2	23.0	19.3	22.4	19.6
			1513	1752.6	2	23.0	19.3	22.3	19.8
		Subtest 3	1312	1712.4	1	23.8	20.2	23.2	20.3
			1413	1732.6	1	23.8	20.2	23.5	20.4
			1513	1752.6	1	23.8	20.1	23.4	20.6
		Subtest 4	1312	1712.4	2	23.2	19.6	22.3	19.8
			1413	1732.6	2	23.2	19.6	22.6	19.8
			1513	1752.6	2	23.2	19.5	22.5	20.1
		Subtest 5	1312	1712.4	0	25.0	21.3	24.0	21.4
			1413	1732.6	0	25.0	21.4	24.3	21.4
			1513	1752.6	0	25.0	21.3	24.2	21.7
	DC-HSDPA	Subtest 1	1312	1712.4	0	25.6	22.0	24.7	21.9
			1413	1732.6	0	25.6	22.0	24.9	21.9
			1513	1752.6	0	25.6	21.9	24.9	22.2
		Subtest 2	1312	1712.4	0	25.5	21.8	24.5	21.8
			1413	1732.6	0	25.5	21.8	24.8	21.9
			1513	1752.6	0	25.5	21.7	24.7	22.2
		Subtest 3	1312	1712.4	0.5	25.2	21.5	24.2	21.6
			1413	1732.6	0.5	25.2	21.4	24.5	21.7
			1513	1752.6	0.5	25.2	21.4	24.4	21.9
		Subtest 4	1312	1712.4	0.5	25.2	21.5	24.2	21.6
			1413	1732.6	0.5	25.2	21.4	24.5	21.7
			1513	1752.6	0.5	25.1	21.4	24.3	22.0

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049
IC: RSS132; RSS133§2.3; RSS139

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	ModuANTion	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
850MHz	GPRS	190	836.6	251.26	323.1
	EGPRS			249.03	310.9
1900MHz	GPRS	661	1880.0	247.26	322.2
	EGPRS			252.53	323.1


CDMA

Band	ModuANTion	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BC10	1xRTT	560	820.0	1.2725	1.425
	1xEV-DO Rev A			1.2651	1.416
BC0	1xRTT	384	836.5	1.2670	1.426
	1xEV-DO Rev A			1.2664	1.417
BC1	1xRTT	600	1880.0	1.2798	1.432
	1xEV-DO Rev A			1.2676	1.431

WCDMA

Band	ModuANTion	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND 5	REL 99	4408	836.6	4.0704	4.600
	HSDPA			4.0607	4.591
BAND 2	REL 99	9800	1880.0	4.0730	4.608
	HSDPA			4.0709	4.616
BAND 4	REL 99	1638	1732.6	4.0653	4.596
	HSDPA			4.0594	4.599

8.1.1. GSM

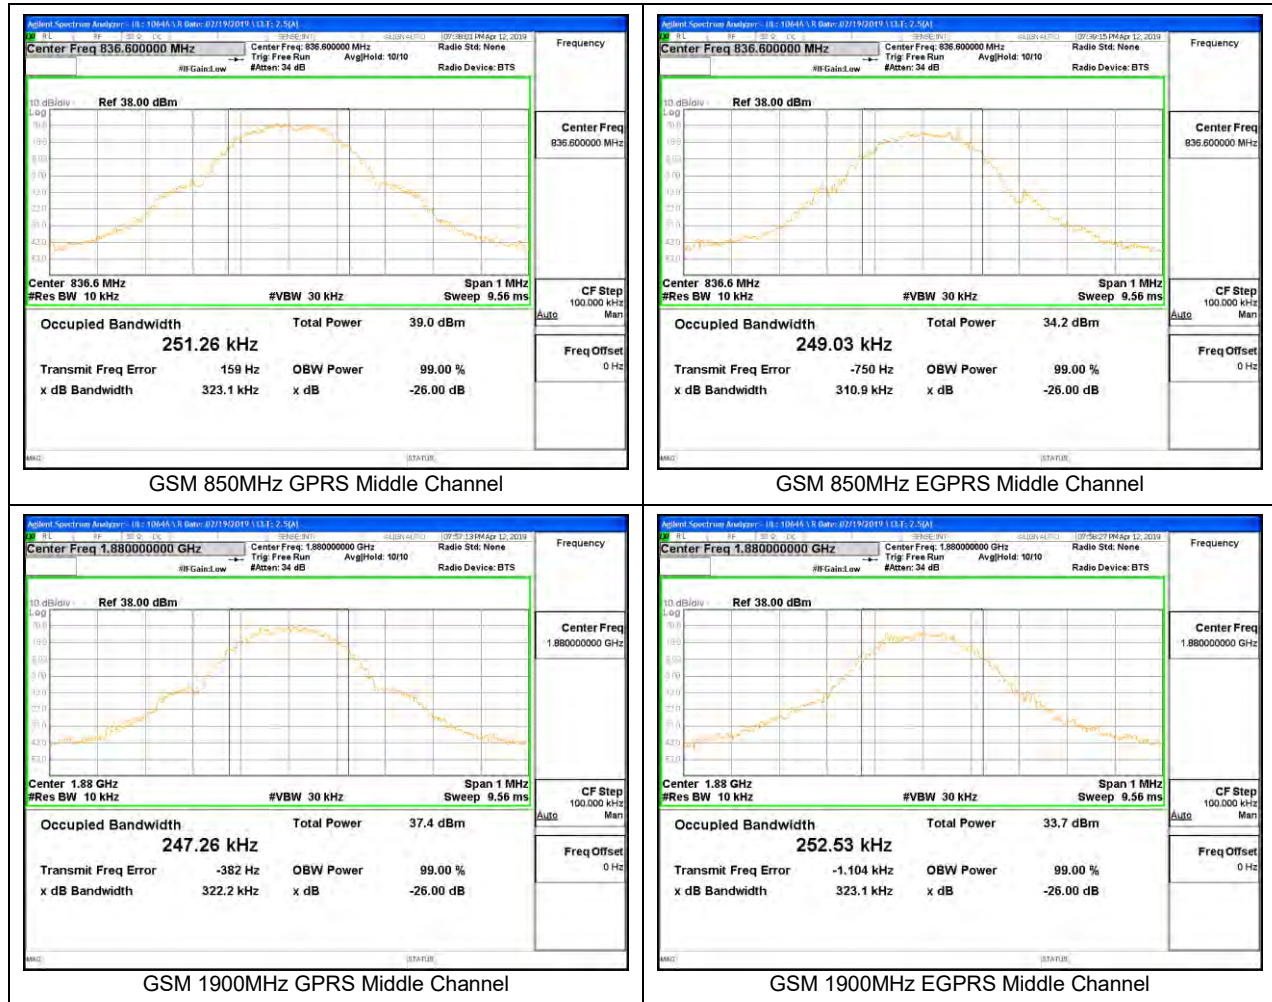

8.1.2. CDMA



8.1.3. WCDMA



8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53 and §90.691
IC: RSS132§5.5; RSS133§6.5 and RSS139§6.6

LIMITS

FCC: §22.917, §24.238, §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

- (i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

- (i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS139§6.6

- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote 2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

TEST PROCEDURE

The transmitter output was connected to a R&S CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.

RESULTS

8.2.1. GSM

GSM 850

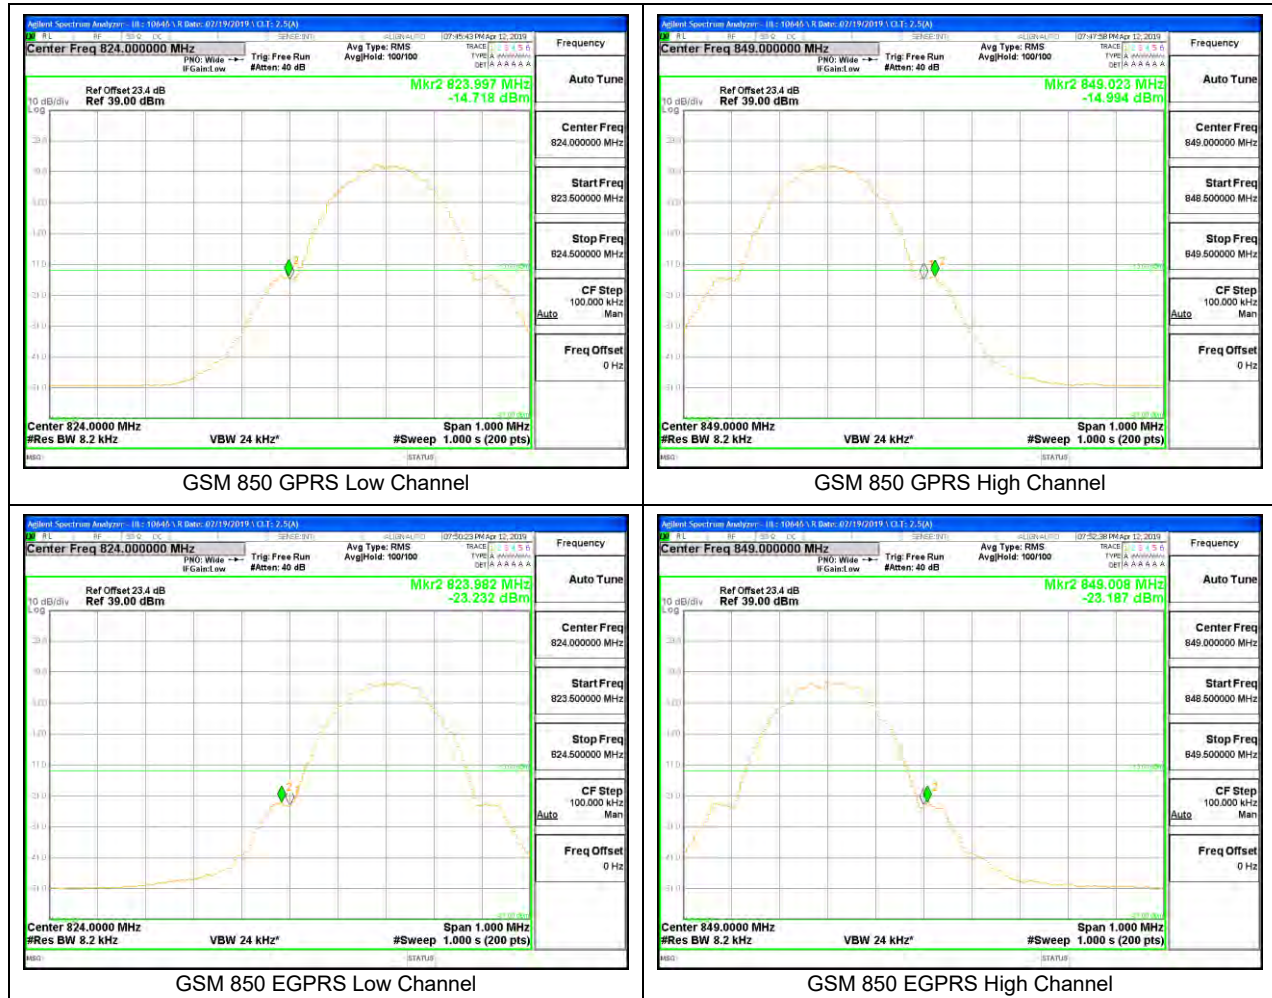

GSM 1900




GSM 1900 GPRS Low Channel



GSM 1900 GPRS High Channel



GSM 1900 EGPRS Low Channel

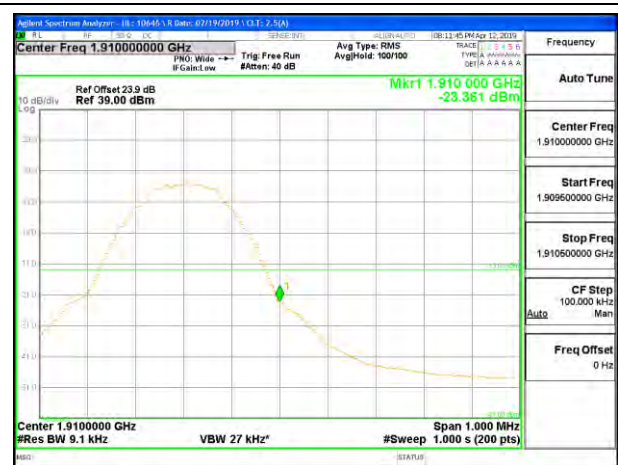

GSM 1900 EGPRS High Channel

8.2.2. CDMA


CDMA BC10



CDMA BC10 1xRTT Low Channel, RBW=1% of EBW ID:12491



CDMA BC10 1xRTT High Channel, RBW=1% of EBW ID:12491

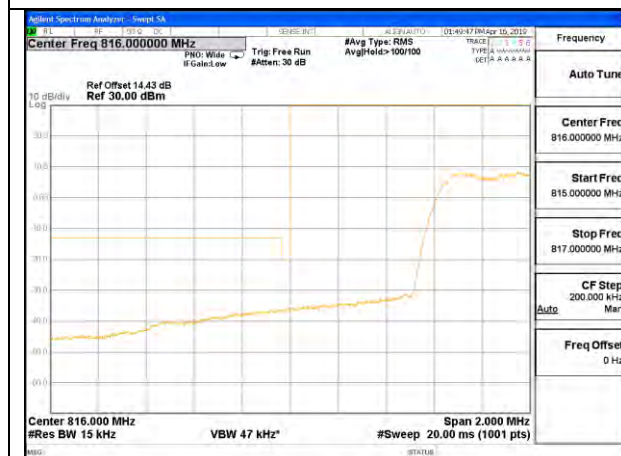


CDMA BC10 1xEV-DO Rev A Low Channel, RBW=1% of EBW ID:12491




CDMA BC10 1xEV-DO Rev A High Channel, RBW=1% of EBW ID:12491


CDMA BC0

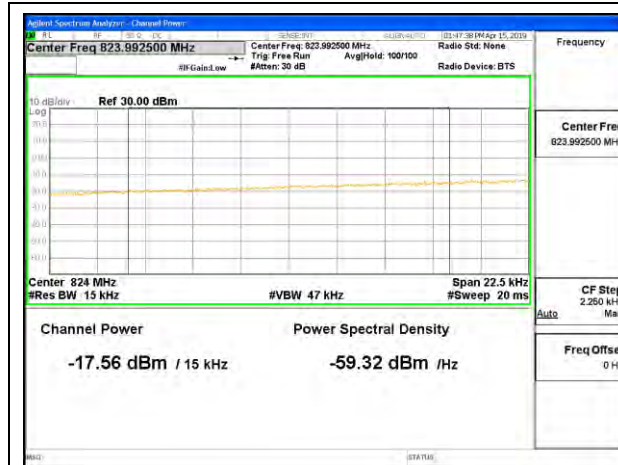


CDMA BC0 1xRTT Low Channel ID:39919

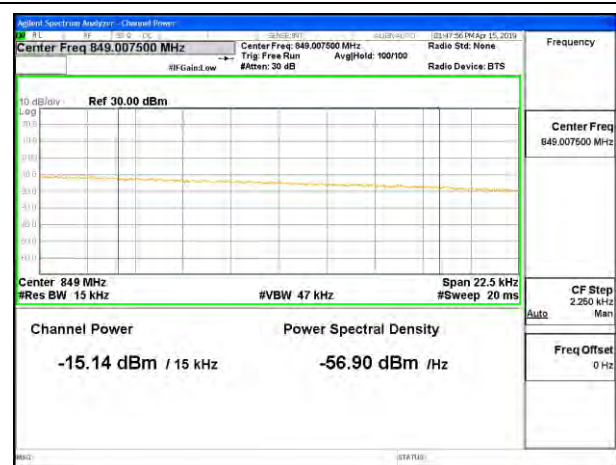

CDMA BC0 1xRTT High Channel ID:39919

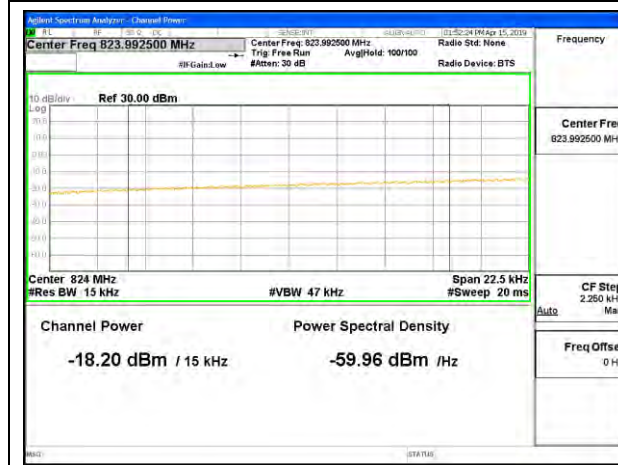

CDMA BC0 1xEV-DO Rev A Low Channel ID:39919

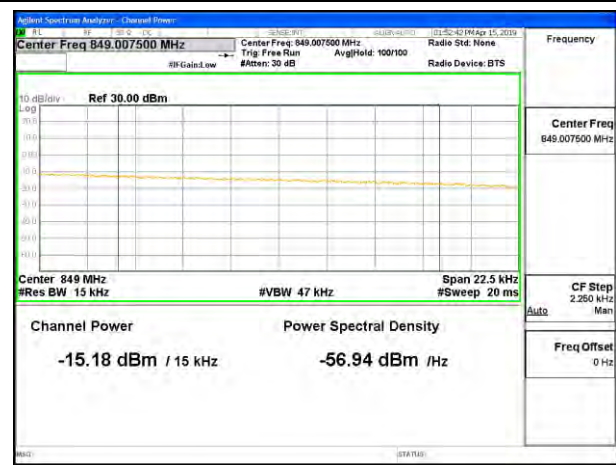

CDMA BC0 1xEV-DO Rev A High Channel ID:39919


CDMA BC1




CDMA BC1 1xRTT Low Channel



CDMA BC1 1xRTT High Channel

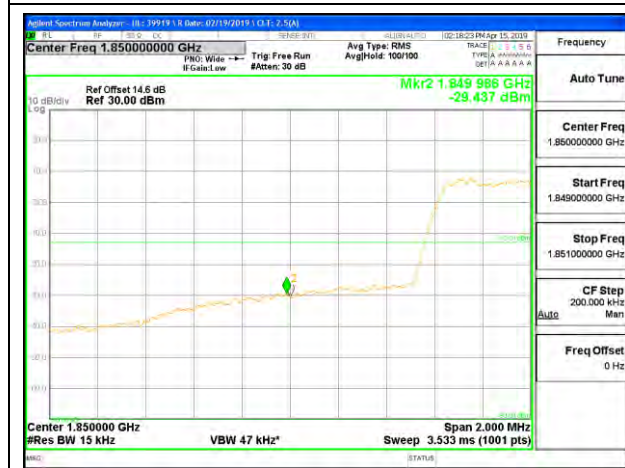


CDMA BC1 1xEV-DO Rev A Low Channel

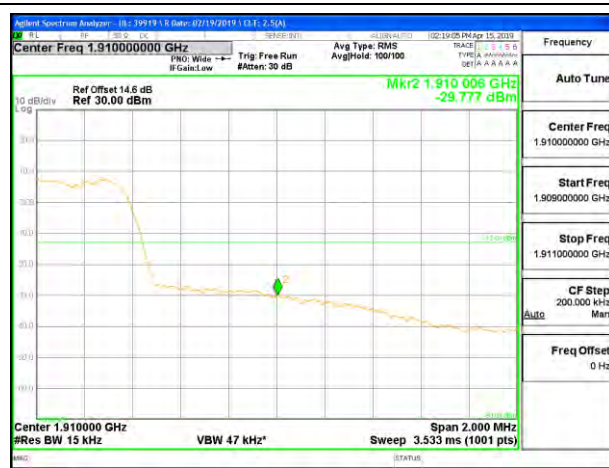

CDMA BC1 1xEV-DO Rev A High Channel

8.2.3. WCDMA

WCDMA BAND 5

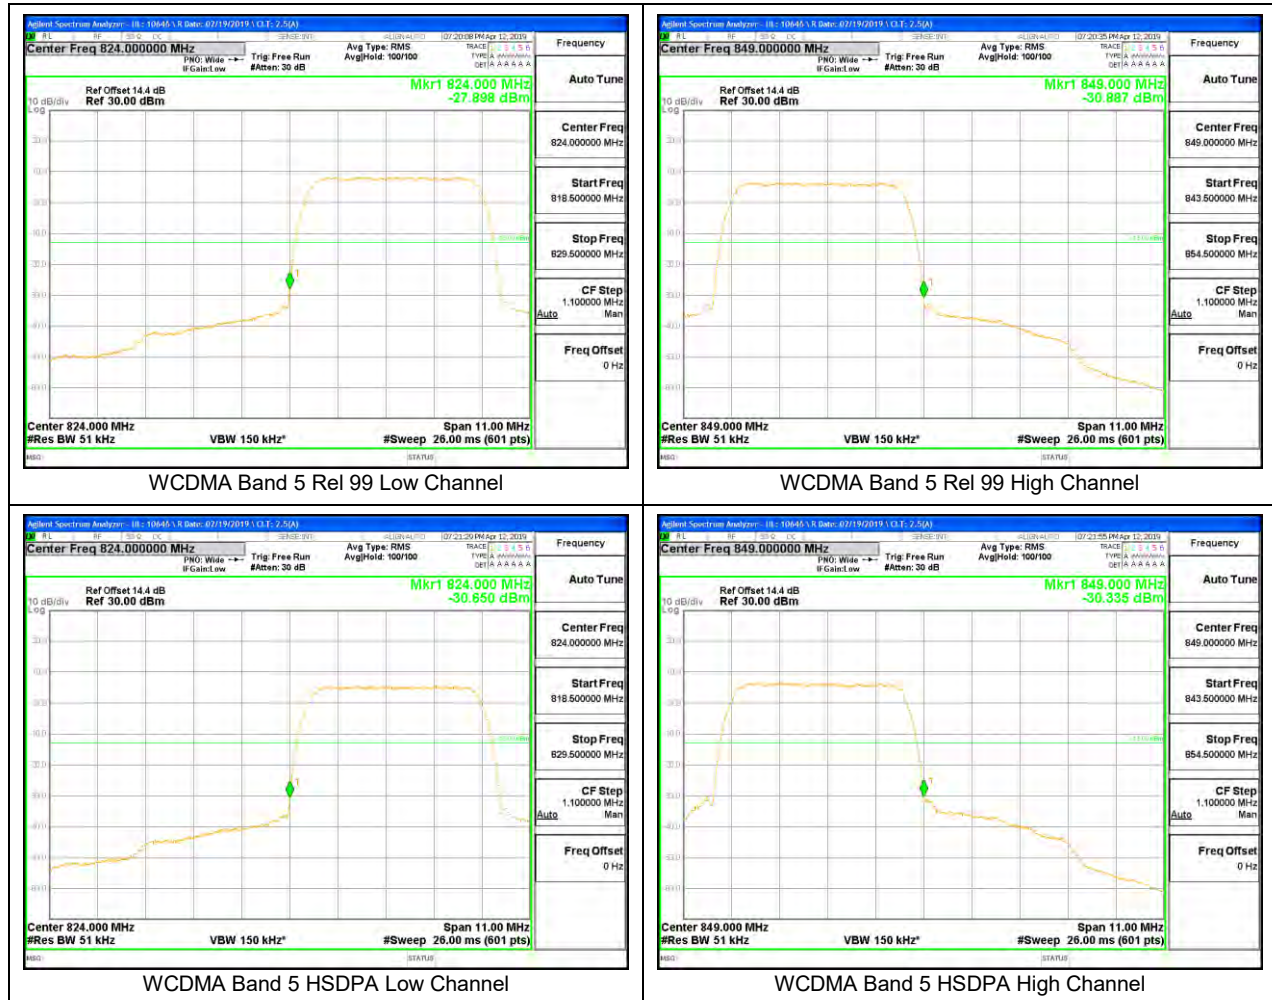

WCDMA BAND 2



WCDMA Band 2 Rel 99 Low Channel



WCDMA Band 2 Rel 99 High Channel



WCDMA Band 2 HSDPA Low Channel



WCDMA Band 2 HSDPA High Channel

WCDMA BAND 4



WCDMA Band 4 Rel 99 Low Channel



WCDMA Band 4 Rel 99 High Channel



WCDMA Band 4 HSDPA Low Channel



WCDMA Band 4 HSDPA High Channel

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53 and §90.691
IC: RSS132§5.5; RSS133§6.5 and RSS139§6.6

LIMITS

FCC: §22.917, §24.238, §27.53 (h), §90.691

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

RSS132§5.5, RSS133§6.5, RSS139§6.6

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


RESULTS

8.3.1. GSM

GSM 850MHz




GSM 1900MHz

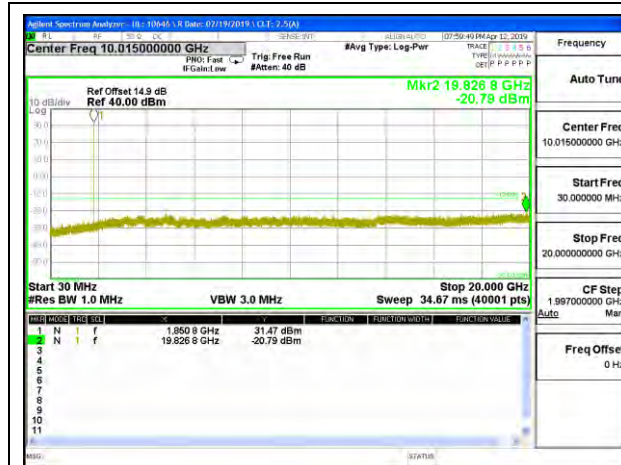


GSM 1900MHz GPRS Low Channel




GSM 1900MHz EGPRS Low Channel

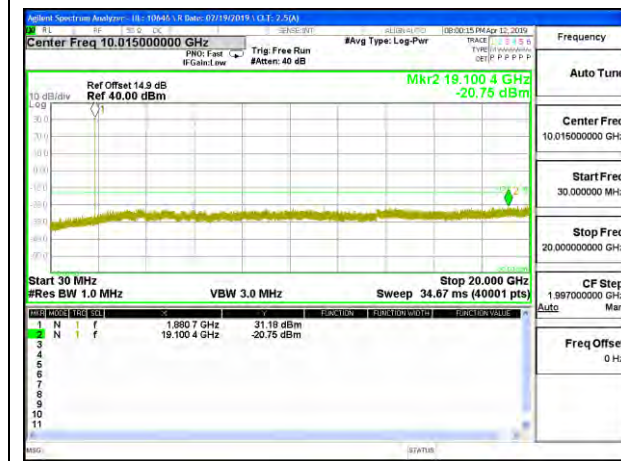


GSM 1900MHz GPRS Middle Channel

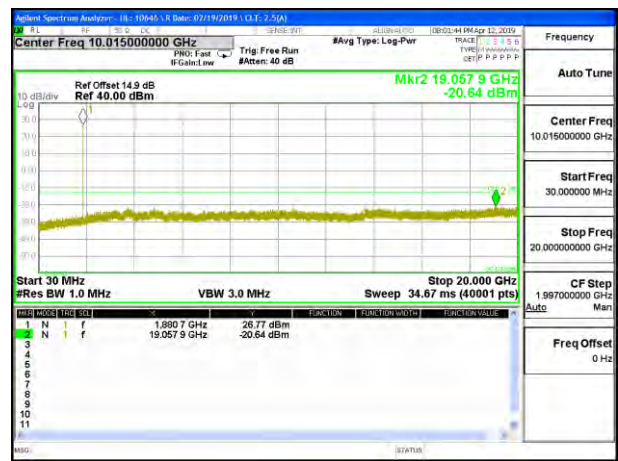

GSM 1900MHz EGPRS Middle Channel

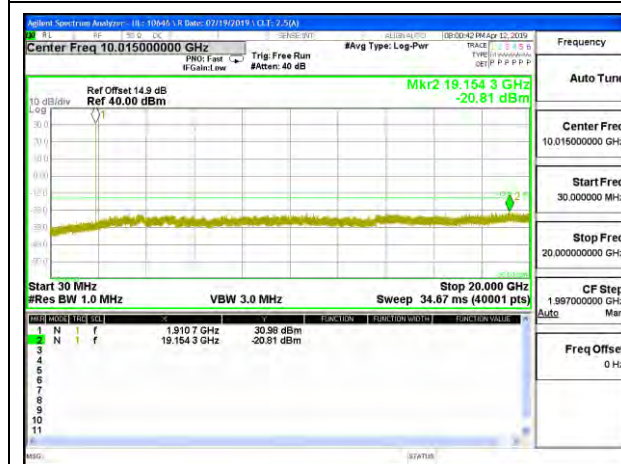


GSM 1900MHz GPRS High Channel

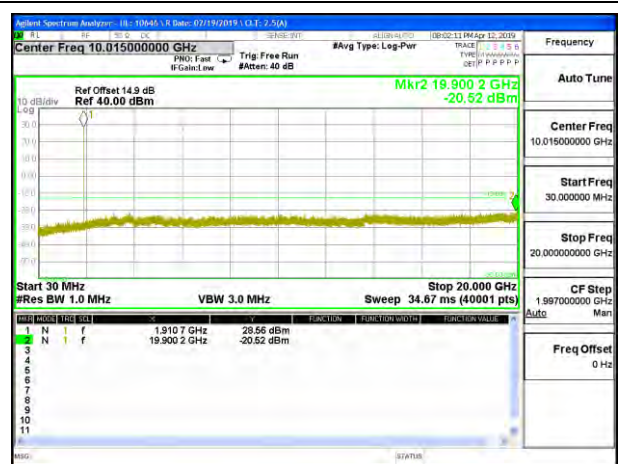

GSM 1900MHz EGPRS High Channel

8.3.2. CDMA


CDMA BC10

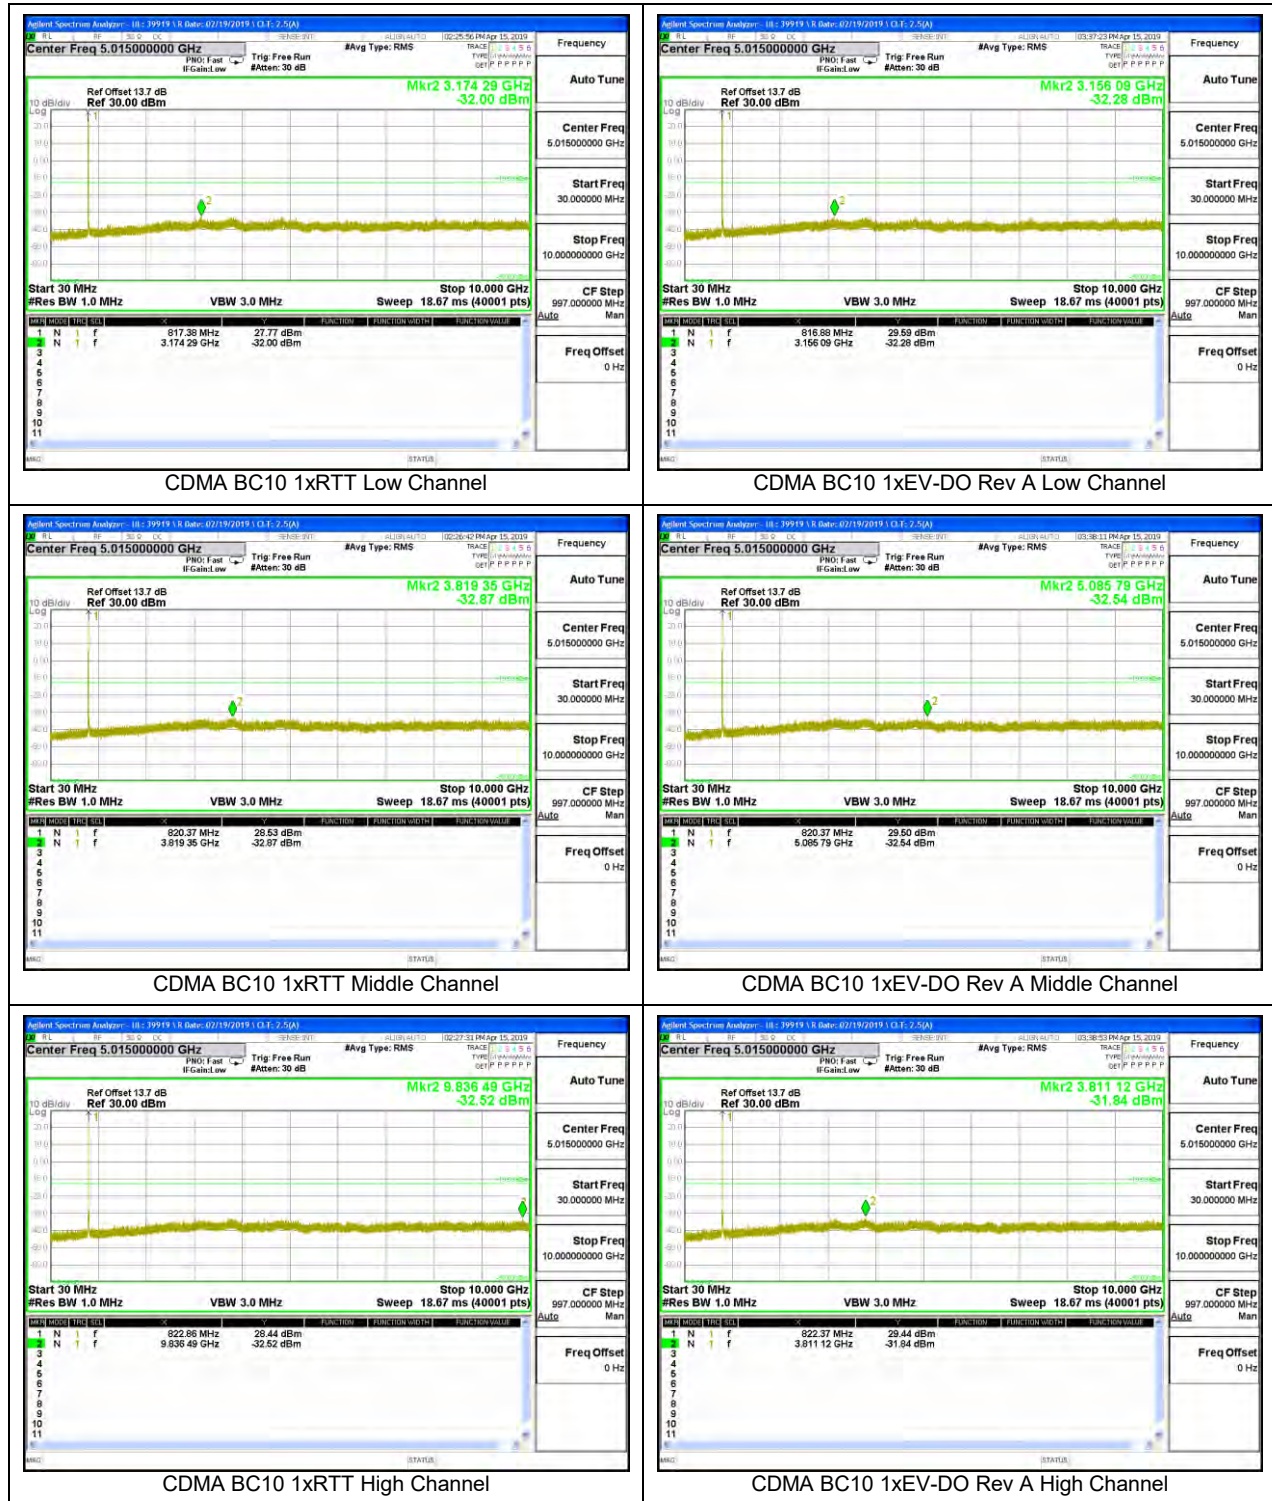


CDMA BC0



CDMA BC0 1xRTT Low Channel

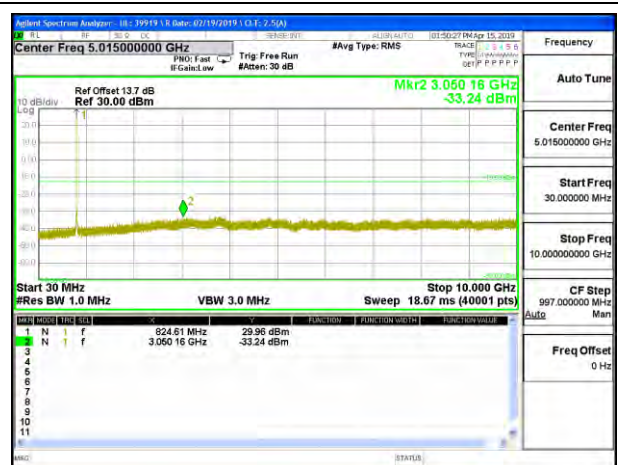


CDMA BC0 1xEV-DO Rev A Low Channel

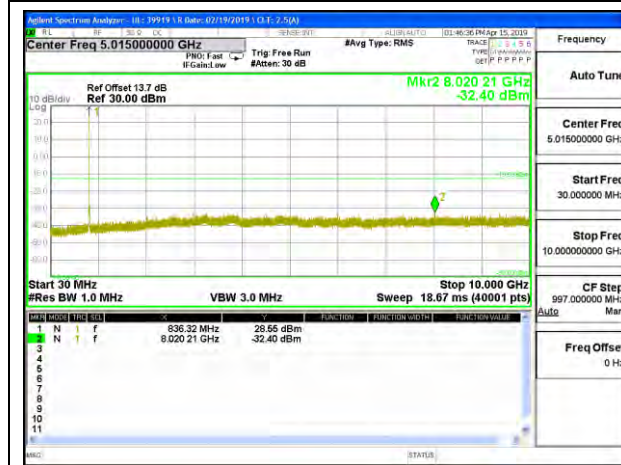


CDMA BC0 1xRTT Middle Channel



CDMA BC0 1xEV-DO Rev A Middle Channel

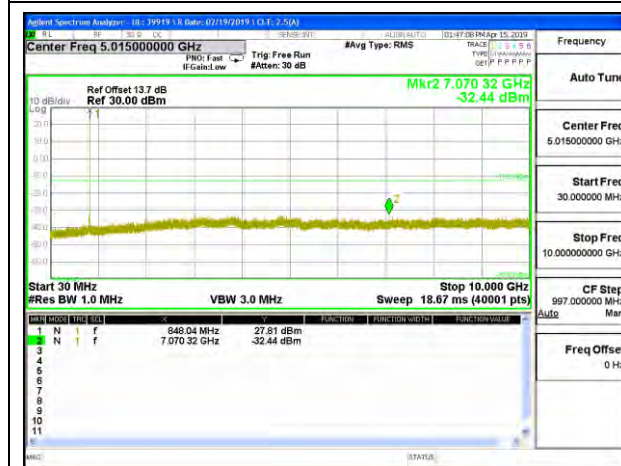


CDMA BC0 1xRTT High Channel

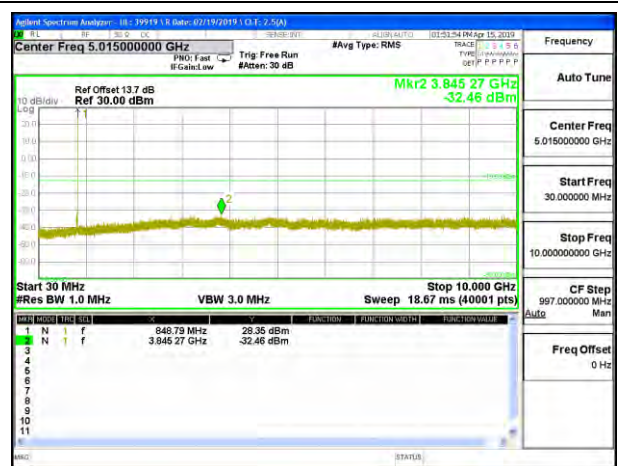


CDMA BC0 1xEV-DO Rev A High Channel


CDMA BC1

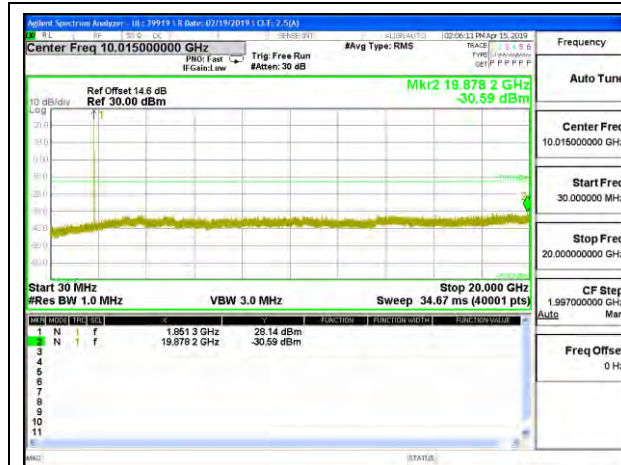

CDMA BC1 1xRTT Low Channel

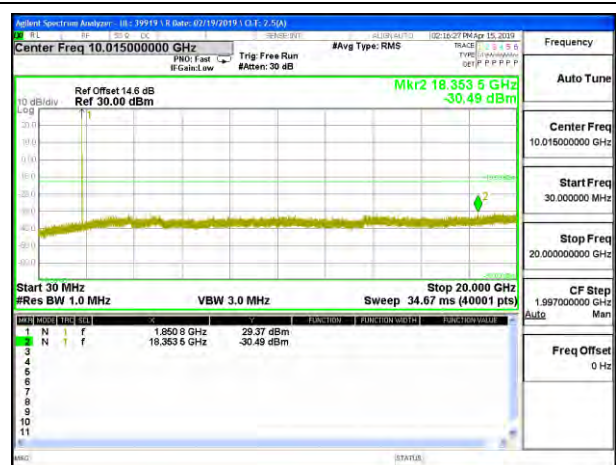


CDMA BC1 1xEV-DO Rev A Low Channel

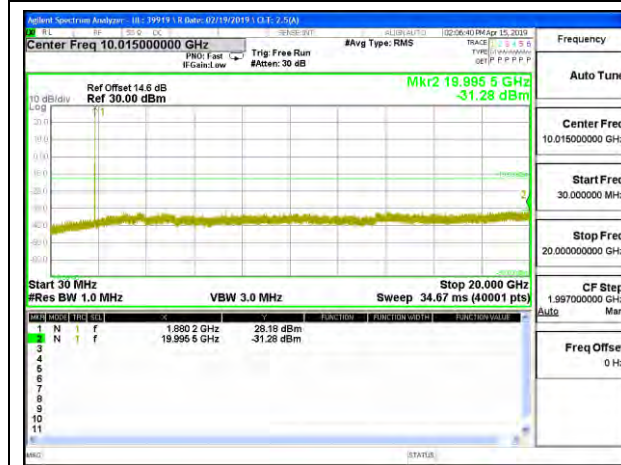

CDMA BC1 1xRTT Middle Channel



CDMA BC1 1xEV-DO Rev A Middle Channel

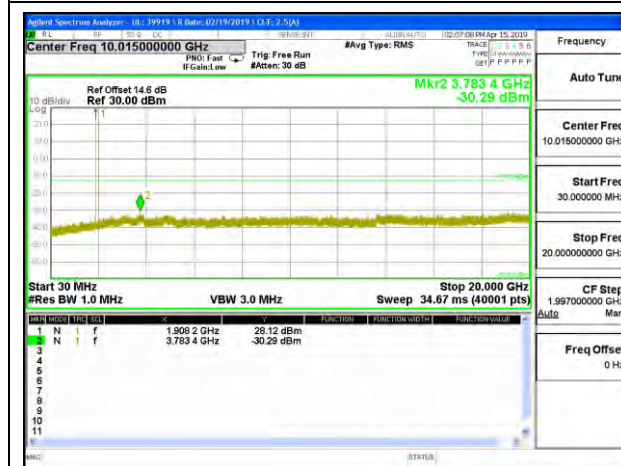

CDMA BC1 1xRTT High Channel




CDMA BC1 1xEV-DO Rev A High Channel

8.3.3. WCDMA


WCDMA BAND 5




WCDMA BAND 2

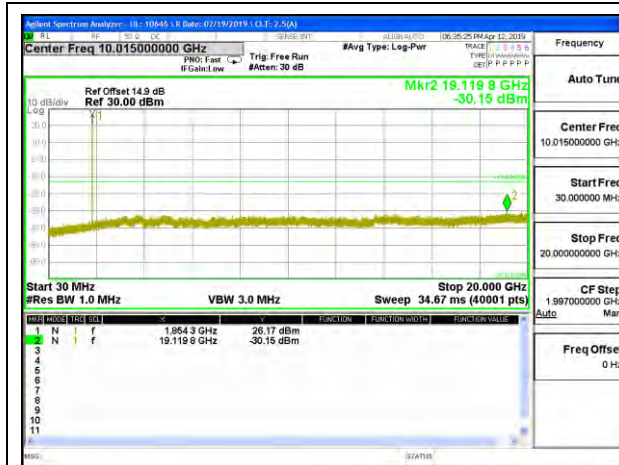


WCDMA Band 2 Rel 99 Low Channel

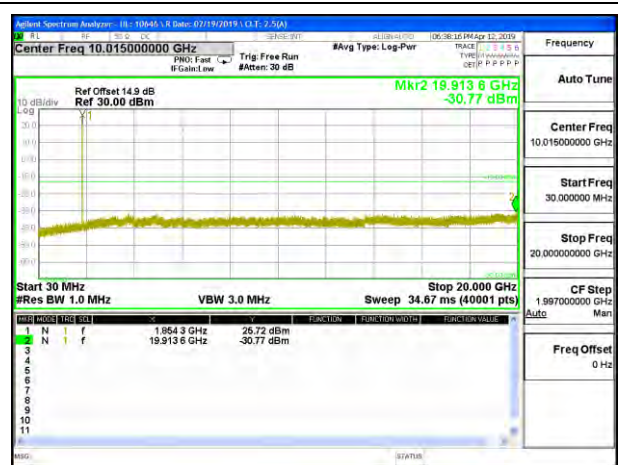


WCDMA Band 2 HSDPA Low Channel

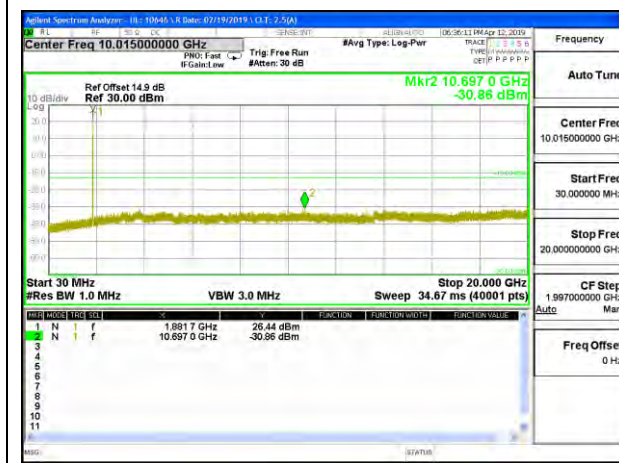


WCDMA Band 2 Rel 99 Middle Channel

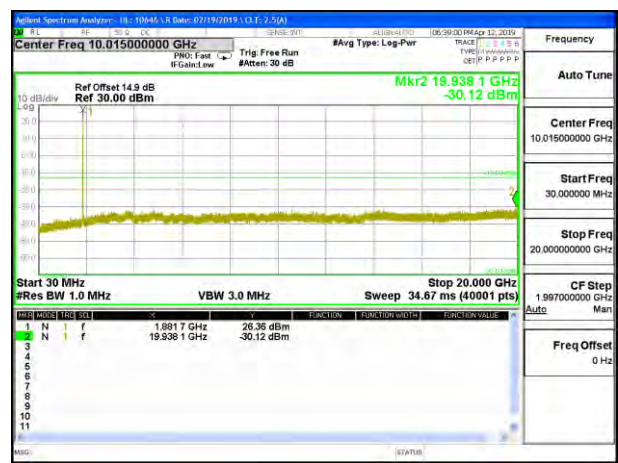

WCDMA Band 2 HSDPA Middle Channel

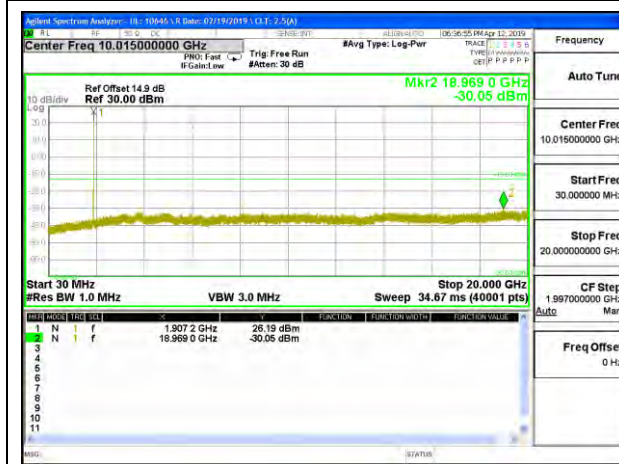


WCDMA Band 2 Rel 99 High Channel

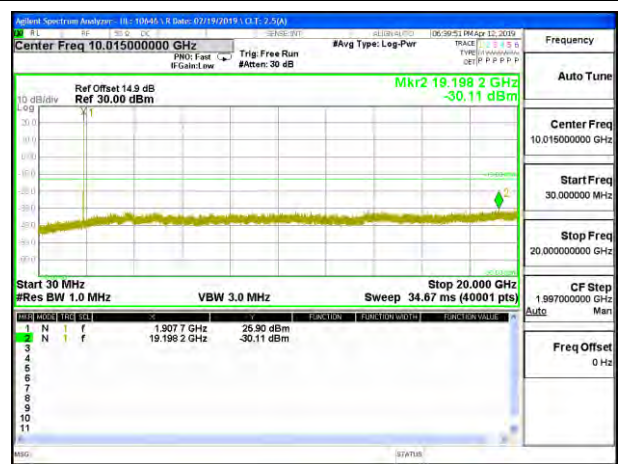


WCDMA Band 2 HSDPA High Channel


WCDMA BAND 4

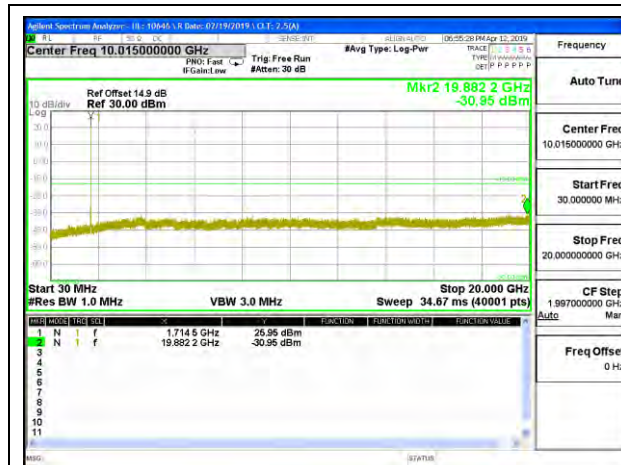


WCDMA Band 4 Rel 99 Low Channel

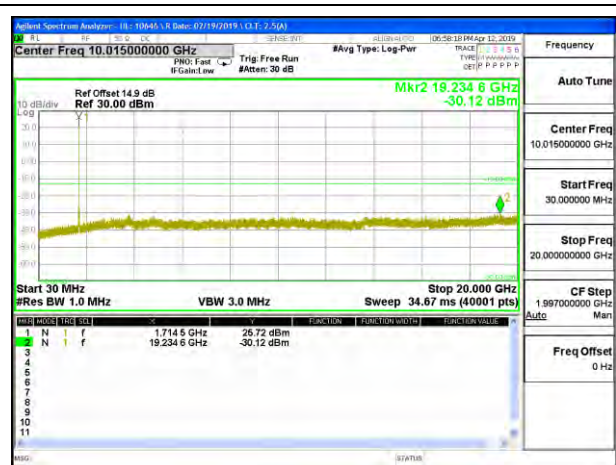


WCDMA Band 4 HSDPA Low Channel

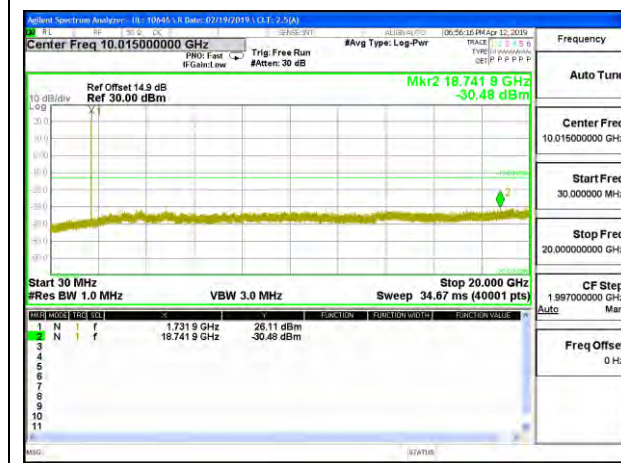


WCDMA Band 4 Rel 99 Middle Channel

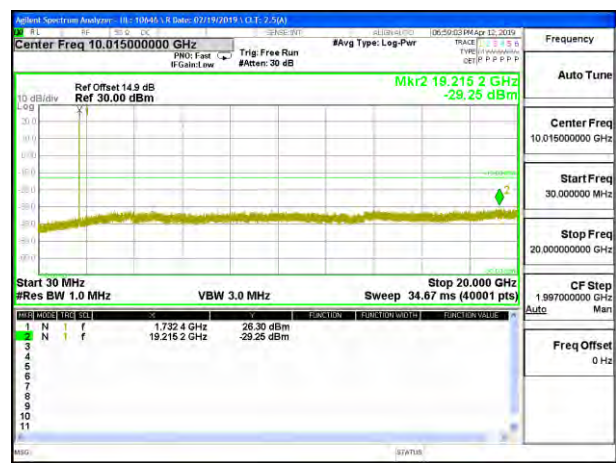

WCDMA Band 4 HSDPA Middle Channel

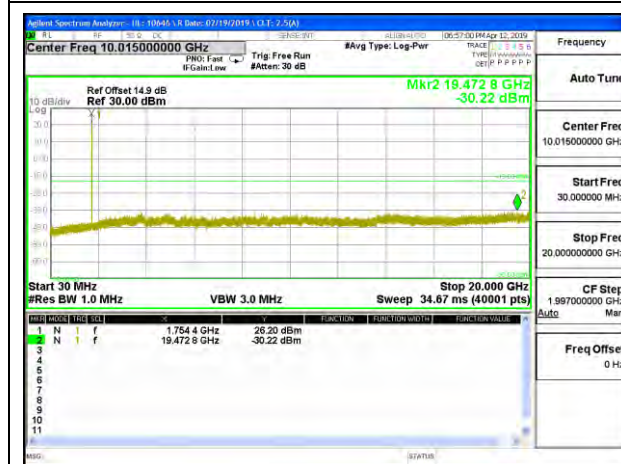

WCDMA Band 4 Rel 99 High Channel

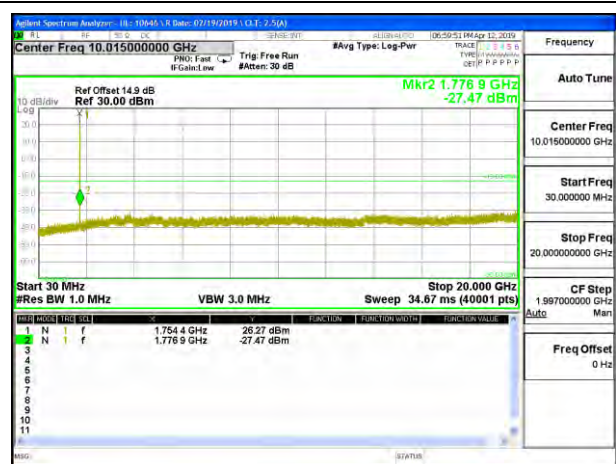

WCDMA Band 4 HSDPA High Channel

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213
IC: RSS132§5.3; RSS133§6.3 and RSS139§6.4

LIMITS

FCC §22.355, §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS132§5.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 SRSP for mobile stations and ± 1.5 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the occupied bandwidth stays within each of the sub-bands (see Section 5.1) when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS133§6.3

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS139§6.4

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

See the following pages.

8.4.1. GSM

ID:	38602	Date:	4/5/19
------------	-------	--------------	--------

GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.038	848.963		
Extreme (50C)		824.038	848.963	4.8	0.006
Extreme (40C)		824.038	848.963	4.3	0.005
Extreme (30C)		824.038	848.963	4.1	0.005
Extreme (10C)		824.038	848.963	4.7	0.006
Extreme (0C)		824.038	848.963	4.8	0.006
Extreme (-10C)		824.038	848.963	4.4	0.005
Extreme (-20C)		824.038	848.963	4.3	0.005
Extreme (-30C)		824.038	848.963	4.0	0.005
20C	15%	824.038	848.963	4.5	0.005
	-15%	824.038	848.963	4.3	0.005
	End Point	824.038	848.963	4.7	0.006

ID:	38602	Date:	4/5/19
------------	-------	--------------	--------

GPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.041	1909.956		
Extreme (50C)		1850.041	1909.956	4.9	0.003
Extreme (40C)		1850.041	1909.956	4.7	0.003
Extreme (30C)		1850.041	1909.956	4.4	0.002
Extreme (10C)		1850.041	1909.956	4.6	0.002
Extreme (0C)		1850.041	1909.956	4.8	0.003
Extreme (-10C)		1850.041	1909.956	4.5	0.002
Extreme (-20C)		1850.041	1909.956	5.2	0.003
Extreme (-30C)		1850.041	1909.956	5.5	0.003
20C	15%	1850.041	1909.956	4.3	0.002
	-15%	1850.041	1909.956	4.6	0.002
	End Point	1850.041	1909.956	4.3	0.002

8.4.2. CDMA

ID:	30606	Date:	4/8/19
------------	-------	--------------	--------

CDMA 1xRTT BC10

Limit		816	824	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	816.5680	823.4280		
Extreme (50C)		816.5680	823.4280	3.3	0.004
Extreme (40C)		816.5680	823.4280	2.6	0.003
Extreme (30C)		816.5680	823.4280	3.0	0.004
Extreme (10C)		816.5680	823.4280	2.4	0.003
Extreme (0C)		816.5680	823.4280	1.9	0.002
Extreme (-10C)		816.5680	823.4280	2.5	0.003
Extreme (-20C)		816.5680	823.4280	3.3	0.004
Extreme (-30C)		816.5680	823.4280	3.1	0.004
20C	15%	816.5680	823.4280	3.1	0.004
	-15%	816.5680	823.4280	2.7	0.003
	End Point	816.5680	823.4280	2.2	0.003

ID:	30606	Date:	4/8/19
------------	-------	--------------	--------

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.0200	848.9880		
Extreme (50C)		824.0200	848.9880	2.2	0.003
Extreme (40C)		824.0200	848.9880	2.7	0.003
Extreme (30C)		824.0200	848.9880	3.7	0.004
Extreme (10C)		824.0200	848.9880	2.3	0.003
Extreme (0C)		824.0200	848.9880	1.9	0.002
Extreme (-10C)		824.0200	848.9880	2.9	0.003
Extreme (-20C)		824.0200	848.9880	4.2	0.005
Extreme (-30C)		824.0200	848.9880	3.8	0.005
20C	15%	824.0200	848.9880	1.8	0.002
	-15%	824.0200	848.9880	2.6	0.003
	End Point	824.0200	848.9880	1.2	0.001

ID:	30606	Date:	4/8/19
------------	-------	--------------	--------

CDMA 1xRTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.5680	1909.4360		
Extreme (50C)		1850.5680	1909.4360	4.2	0.002
Extreme (40C)		1850.5680	1909.4360	3.8	0.002
Extreme (30C)		1850.5680	1909.4360	2.8	0.001
Extreme (10C)		1850.5680	1909.4360	2.9	0.002
Extreme (0C)		1850.5680	1909.4360	2.7	0.001
Extreme (-10C)		1850.5680	1909.4360	3.5	0.002
Extreme (-20C)		1850.5680	1909.4360	3.0	0.002
Extreme (-30C)		1850.5680	1909.4360	3.1	0.002
20C	15%	1850.5680	1909.4360	3.6	0.002
	-15%	1850.5680	1909.4360	3.1	0.002
	End Point	1850.5680	1909.4360	2.9	0.002

8.4.3. WCDMA

ID:	38602	Date:	4/8/19
------------	-------	--------------	--------

WCDMA REL 99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.2300	848.7600		
Extreme (50C)		824.2300	848.7600	-0.5	-0.001
Extreme (40C)		824.2300	848.7600	-0.5	-0.001
Extreme (30C)		824.2300	848.7600	-0.4	0.000
Extreme (10C)		824.2300	848.7600	-0.5	-0.001
Extreme (0C)		824.2300	848.7600	-0.4	0.000
Extreme (-10C)		824.2300	848.7600	-0.6	-0.001
Extreme (-20C)		824.2300	848.7600	-0.5	-0.001
Extreme (-30C)		824.2300	848.7600	-0.4	0.000
20C	15%	824.2300	848.7600	-0.5	-0.001
	-15%	824.2300	848.7600	-0.3	0.000
	End Point	824.2300	848.7600	-0.5	-0.001

ID:	38602	Date:	4/8/19
------------	-------	--------------	--------

WCDMA REL 99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.240	1909.750		
Extreme (50C)		1850.240	1909.750	-0.7	0.000
Extreme (40C)		1850.240	1909.750	-0.5	0.000
Extreme (30C)		1850.240	1909.750	-0.4	0.000
Extreme (10C)		1850.240	1909.750	-0.4	0.000
Extreme (0C)		1850.240	1909.750	-0.6	0.000
Extreme (-10C)		1850.240	1909.750	-0.6	0.000
Extreme (-20C)		1850.240	1909.750	-0.4	0.000
Extreme (-30C)		1850.240	1909.750	-0.2	0.000
20C	15%	1850.240	1909.750	-0.5	0.000
	-15%	1850.240	1909.750	-0.3	0.000
	End Point	1850.240	1909.750	-0.7	0.000

ID:	38602	Date:	4/8/19
------------	-------	--------------	--------

WCDMA REL 99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.2400	1754.7600		
Extreme (50C)		1710.2400	1754.7600	-0.4	0.000
Extreme (40C)		1710.2400	1754.7600	-0.3	0.000
Extreme (30C)		1710.2400	1754.7600	-0.4	0.000
Extreme (10C)		1710.2400	1754.7600	-0.6	0.000
Extreme (0C)		1710.2400	1754.7600	-0.3	0.000
Extreme (-10C)		1710.2400	1754.7600	-0.3	0.000
Extreme (-20C)		1710.2400	1754.7600	-0.5	0.000
Extreme (-30C)		1710.2400	1754.7600	-0.4	0.000
20C	15%	1710.2400	1754.7600	-0.5	0.000
	-15%	1710.2400	1754.7600	-0.3	0.000
	End Point	1710.2400	1754.7600	-0.4	0.000

8.5. PEAK-TO-AVERAGE POWER RATIO

LIMIT


In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT


ANT 1 antenna was used to measure as the worst case. The results from all CCDF plots are passed with 13dB peak-to-average power ratio criteria.

ID:	10646	Date:	4/12/19
------------	-------	--------------	---------

8.5.1. GSM

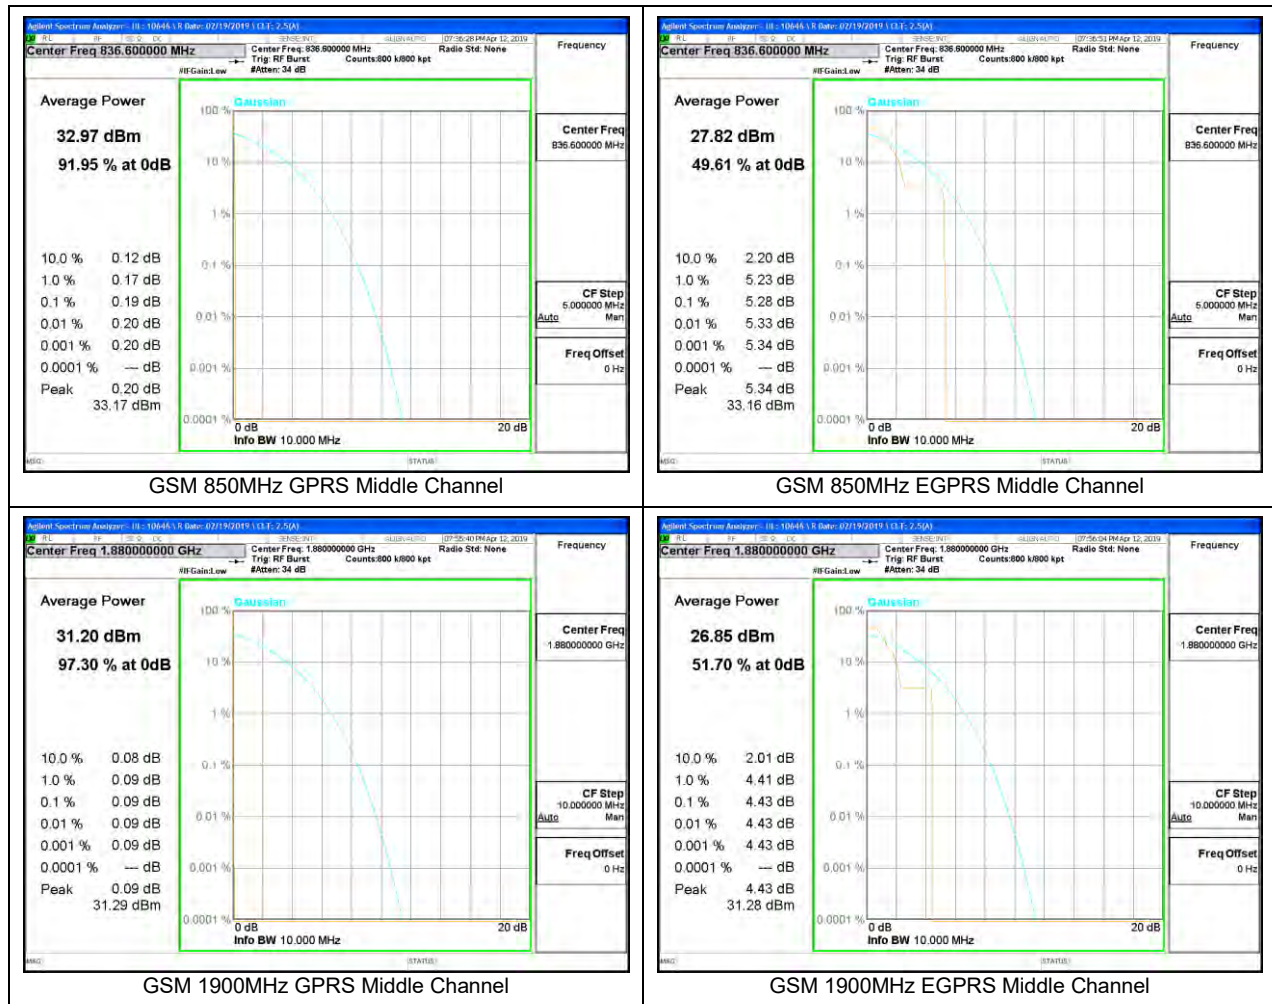

8.5.2. CDMA

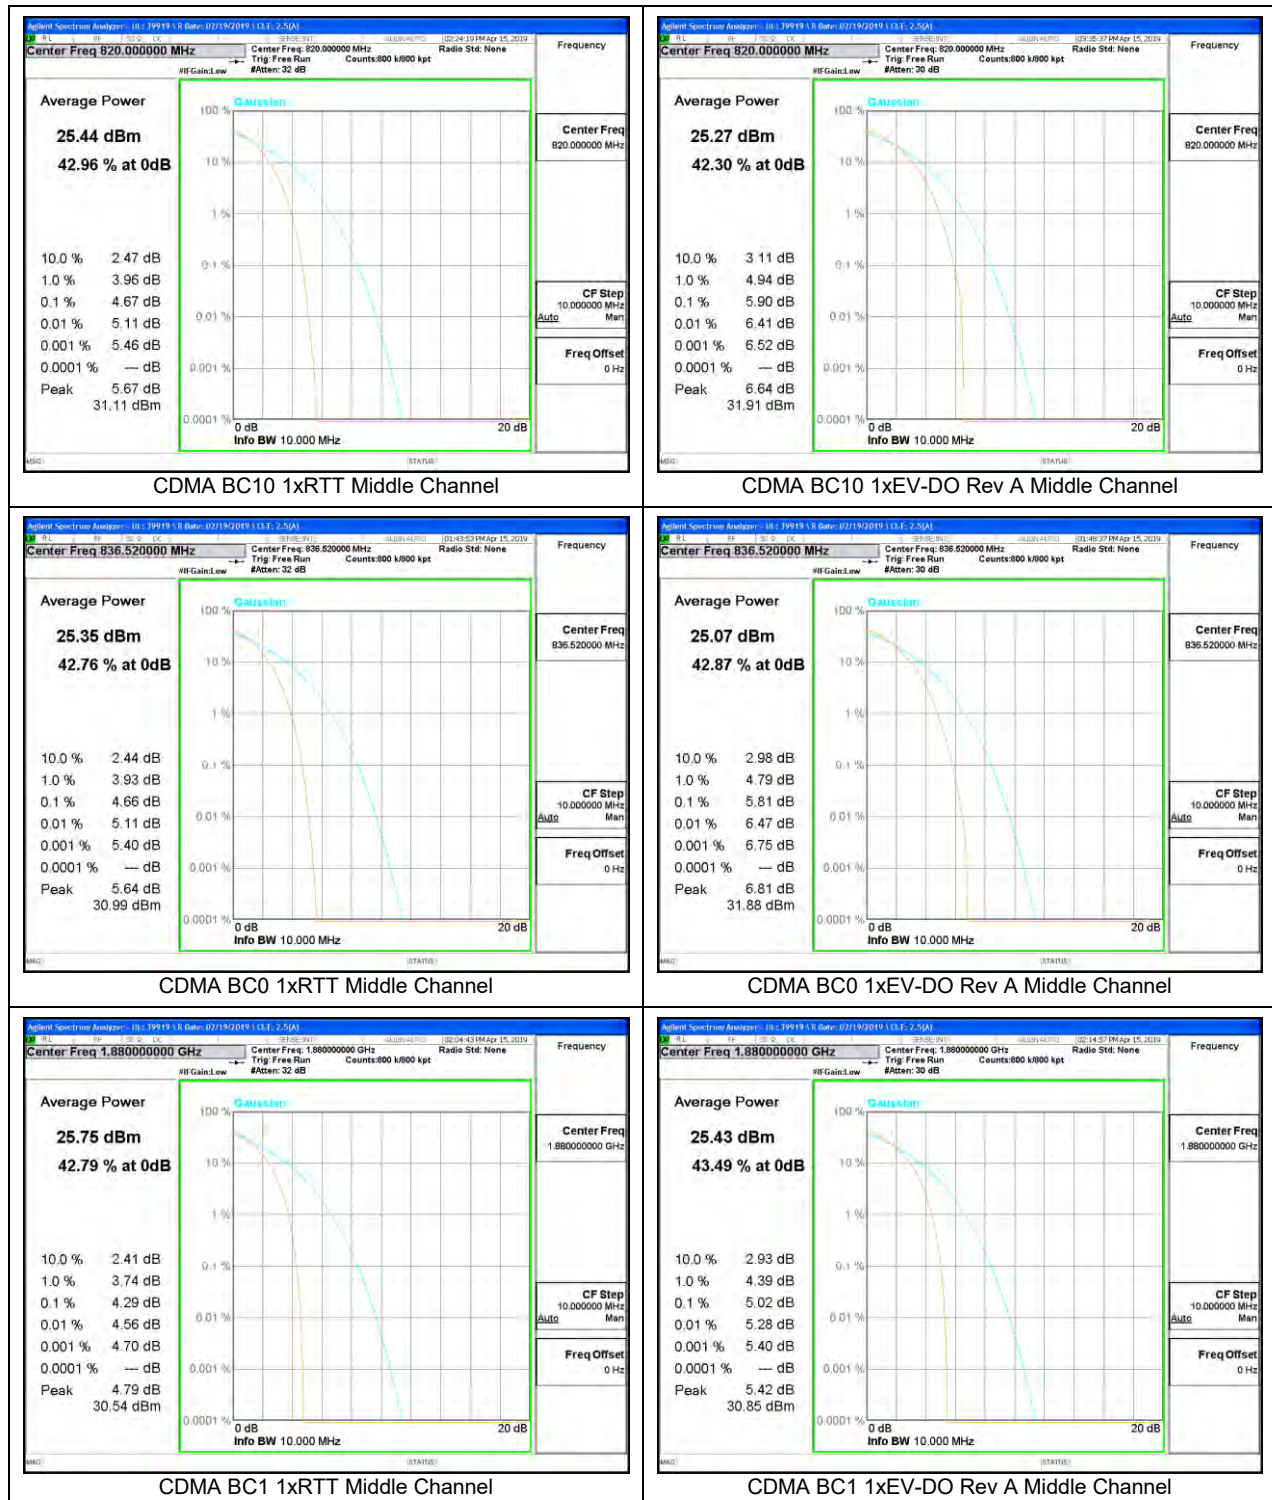

8.5.3. WCDMA




WCDMA Band 5 Rel 99 Middle Channel




WCDMA Band 5 HSDPA Middle Channel




WCDMA Band 2 Rel 99 Middle Channel

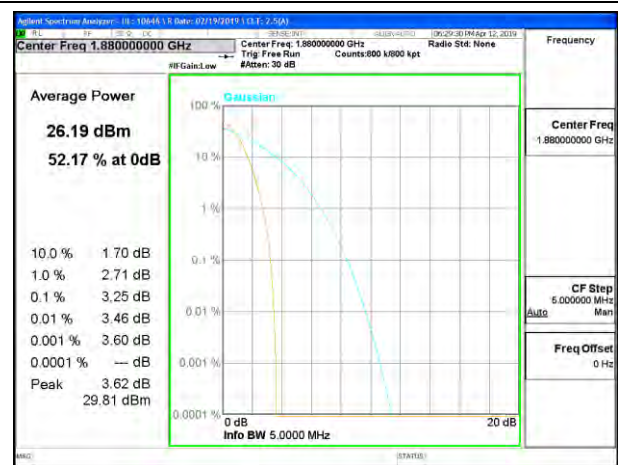

WCDMA Band 2 HSDPA Middle Channel

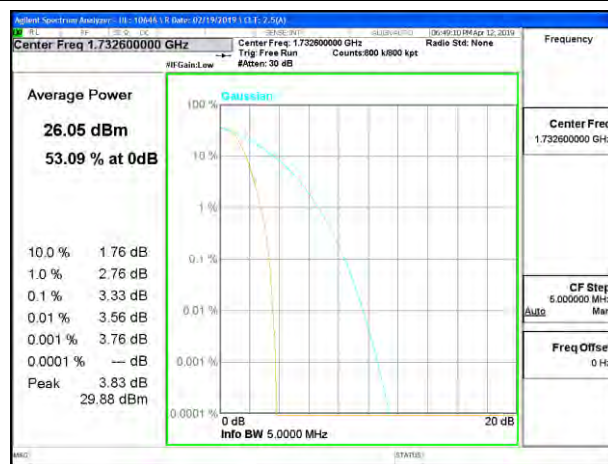

WCDMA Band 4 Rel 99 Middle Channel

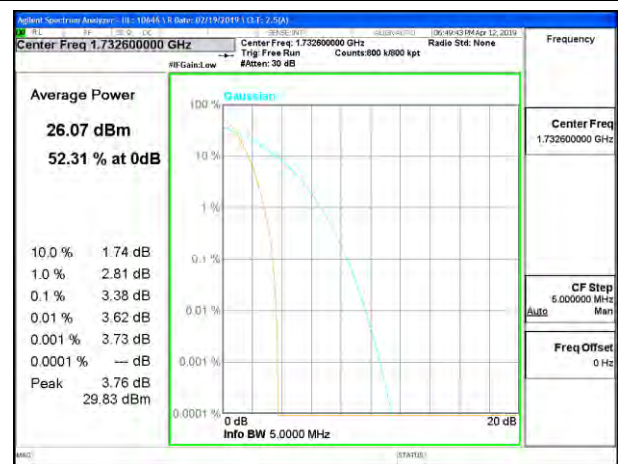

WCDMA Band 4 HSDPA Middle Channel

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691.
IC: RSS132§5.5; RSS133§6.5 and RSS139§6.6

LIMIT

FCC: §22.917(a), §24.238(a), §27.53 (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

- (i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts).
- (ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

- (i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts).
- (ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS139§6.6

- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote 2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} P$ (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} P$ (watts) dB.

TEST PROCEDURE

KDB 971168 D01

RESULTS

9.1.1. GSM

GSM 850MHz

Company:	
Project #:	12696946
Date:	4/5/2019
Test Engineer:	12501
Configuration:	EUT only
Mode:	GSM850 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.2MHz									
1.663	-64.58	Pk	28.8	-32.4	12.2	-55.98	-13	-42.98	H
1.644	-65.13	Pk	28.7	-32.4	11.5	-57.33	-13	-44.33	V
2.443	-65.94	Pk	32.3	-31.4	12.1	-52.94	-13	-39.94	V
2.466	-67.29	Pk	32.5	-31.5	11.9	-54.39	-13	-41.39	H
3.225	-67.24	Pk	32.9	-30.6	11	-53.94	-13	-40.94	V
3.244	-66.15	Pk	32.9	-30.6	11.2	-52.65	-13	-39.65	H
Mid Channel 836.6MHz									
1.715	-67.39	Pk	29.3	-32.3	13.3	-57.09	-13	-44.09	V
1.731	-66.25	Pk	29.5	-32.5	12.5	-56.75	-13	-43.75	H
2.58	-66.53	Pk	32.3	-31.3	12.5	-53.03	-13	-40.03	H
2.638	-66.76	Pk	32.4	-31	12.7	-52.66	-13	-39.66	V
3.28	-68.20	Pk	32.9	-30.4	10.7	-55.00	-13	-42.00	V
3.299	-67.14	Pk	32.9	-30.4	11.5	-53.14	-13	-40.14	H
High Channel 848.8MHz									
1.781	-65.67	Pk	30.1	-32.1	11.9	-55.77	-13	-42.77	H
1.783	-70.77	Pk	30.1	-32.2	12.8	-60.07	-13	-47.07	V
2.56	-68.14	Pk	32.3	-31.4	12	-55.24	-13	-42.24	H
2.633	-67.08	Pk	32.4	-31.1	13	-52.78	-13	-39.78	V
3.413	-67.4	Pk	32.8	-30.2	11.7	-53.1	-13	-40.1	H
3.483	-68.12	Pk	32.8	-30.3	11.3	-54.32	-13	-41.32	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	4/5/2019
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM850 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.2MHz									
1.714	-65.11	Pk	29.3	-32.3	11.8	-56.31	-13	-43.31	H
1.715	-65.63	Pk	29.3	-32.3	13.3	-55.33	-13	-42.33	V
2.409	-66.13	Pk	32.2	-31.3	12.4	-52.83	-13	-39.83	V
2.46	-66.09	Pk	32.4	-31.6	12.4	-52.89	-13	-39.89	H
3.33	-66.26	Pk	32.9	-30.2	10.8	-52.76	-13	-39.76	H
3.38	-66.47	Pk	32.8	-30	11.8	-51.87	-13	-38.87	V
Mid Channel 836.6MHz									
1.696	-65.31	Pk	28.8	-32.3	12.6	-56.21	-13	-43.21	H
1.716	-65.81	Pk	29.3	-32.3	13.4	-55.41	-13	-42.41	V
2.429	-66.23	Pk	32.3	-31.4	11.7	-53.63	-13	-40.63	V
2.481	-67.13	Pk	32.4	-31.4	11.3	-54.83	-13	-41.83	H
3.415	-67.1	Pk	32.8	-30.3	11.8	-52.8	-13	-39.8	H
3.48	-66.78	Pk	32.8	-30.4	11.4	-52.98	-13	-39.98	V
High Channel 848.8MHz									
1.784	-65.37	Pk	30.1	-32.3	12.3	-55.27	-13	-42.27	H
1.820	-66.15	Pk	30.6	-32.2	11.2	-56.55	-13	-43.55	V
2.631	-66	Pk	32.4	-31.1	12.9	-51.80	-13	-38.80	V
2.632	-66.35	Pk	32.4	-31.1	12	-53.05	-13	-40.05	H
3.430	-66.54	Pk	32.7	-30.1	11.9	-52.04	-13	-39.04	H
3.431	-67.67	Pk	32.7	-30.1	12.1	-52.97	-13	-39.97	V

Pk - Peak detector

GSM 1900MHz

Company:	
Project #:	12696946
Date:	4/29/19
Test Engineer:	10646
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.700	-63.68	Pk	33.1	-29.7	11.2	-49.08	-13	-36.08	H
7.426	-70.69	Pk	35.7	-24.6	10.9	-48.69	-13	-35.69	H
3.700	-64.13	Pk	33.1	-29.7	11.5	-49.23	-13	-36.23	V
7.442	-70.81	Pk	35.7	-24.6	11.2	-48.51	-13	-35.51	V
5.553	-68.09	Pk	34.8	-28	11	-50.29	-13	-37.29	V
5.557	-67.82	Pk	34.8	-28.1	10.7	-50.42	-13	-37.42	H
Mid Channel, 1880.0MHz									
3.801	-65.45	Pk	33.5	-29.6	11.3	-50.25	-13	-37.25	H
7.543	-69.57	Pk	35.7	-24.5	10.7	-47.67	-13	-34.67	H
3.786	-66.04	Pk	33.5	-29.7	11.3	-50.94	-13	-37.94	V
7.523	-70.05	Pk	35.6	-24.6	10.6	-48.45	-13	-35.45	V
5.610	-68.27	Pk	35	-28.1	10.5	-50.87	-13	-37.87	H
5.627	-68.29	Pk	34.9	-28	10.6	-50.79	-13	-37.79	V
High Channel, 1909.8MHz									
3.820	-64.12	Pk	33.5	-29.5	11.6	-48.52	-13	-35.52	H
7.647	-69.95	Pk	35.7	-24.5	10.7	-48.05	-13	-35.05	H
3.820	-71.78	Av	33.5	-29.5	11.4	-56.38	-13	-43.38	V
3.820	-64.85	Pk	33.5	-29.5	11.4	-49.45	-13	-36.45	V
7.630	-69.39	Pk	35.7	-24.4	11.3	-46.79	-13	-33.79	V
5.658	-68.02	Pk	35	-27.9	10.9	-50.02	-13	-37.02	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	4/29/19
Test Engineer:	31300
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.881	-64.95	Pk	33.6	-29.4	11.4	-49.35	-13	-36.35	H
10.865	-71.52	Pk	37.9	-20.8	10.9	-43.52	-13	-30.52	H
1.500	-59.29	Pk	27.9	-32.5	12.3	-51.59	-13	-38.59	V
2.598	-66.67	Pk	32.4	-31.2	11.3	-54.17	-13	-41.17	V
6.396	-68.45	Pk	35.5	-26	10.7	-48.25	-13	-35.25	H
6.500	-67.14	Pk	35.5	-26	11.3	-46.34	-13	-33.34	V
Mid Channel, 1880MHz									
3.878	-65.26	Pk	33.6	-29.4	11.8	-49.26	-13	-36.26	H
1.500	-59.06	Pk	27.9	-32.5	12.3	-51.36	-13	-38.36	V
2.499	-65.17	Pk	32.4	-31.5	11.8	-52.47	-13	-39.47	V
2.935	-67.36	Pk	32.5	-30.6	11.9	-53.56	-13	-40.56	H
6.500	-64.69	Pk	35.5	-26.1	10.9	-44.39	-13	-31.39	H
9.885	-70.98	Pk	37.1	-22.2	10.9	-45.18	-13	-32.18	V
High Channel, 1909.8MHz									
3.819	-65.29	Pk	33.5	-29.5	11.6	-49.69	-13	-36.69	H
10.842	-71.42	Pk	37.9	-20.2	10.8	-42.92	-13	-29.92	V
2.599	-66.1	Pk	32.4	-31.1	11.3	-53.50	-13	-40.50	V
5.736	-67.9	Pk	35	-27.5	10.3	-50.10	-13	-37.10	H
6.500	-67.33	Pk	35.5	-26.1	11.3	-46.63	-13	-33.63	V
9.673	-70.59	Pk	36.9	-22	10.9	-44.79	-13	-31.79	H

Pk - Peak detector

9.1.2. CDMA

CDMA BC10

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC10 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 817.25MHz									
1.702	-66.61	Pk	29	-32.1	12.2	-57.51	-13	-44.51	H
1.703	-66.38	Pk	29.1	-32.1	12.9	-56.48	-13	-43.48	V
2.444	-67.2	Pk	32.5	-31.4	12.1	-54.00	-13	-41.00	V
2.454	-67.65	Pk	32.4	-31.5	12.4	-54.35	-13	-41.35	H
3.258	-67.36	Pk	32.9	-30.5	10.6	-54.36	-13	-41.36	V
3.271	-67.77	Pk	32.9	-30.5	10	-55.37	-13	-42.37	H
Mid Channel 820MHz									
1.643	-69.45	Pk	28.6	-32.3	12.3	-60.85	-13	-47.85	H
1.645	-70.73	Pk	28.7	-32.4	11.4	-63.03	-13	-50.03	V
2.369	-69.58	Pk	32.1	-31.2	12.4	-56.28	-13	-43.28	V
2.371	-70.35	Pk	32.1	-31.2	13.2	-56.25	-13	-43.25	H
3.358	-69.17	Pk	32.8	-30.1	11.6	-54.87	-13	-41.87	V
3.359	-71.75	Pk	32.8	-30.2	11	-58.15	-13	-45.15	H
High Channel 822.75MHz									
1.666	-70.85	Pk	28.8	-32.4	12.5	-61.95	-13	-48.95	H
1.668	-71.41	Pk	28.8	-32.4	11.6	-63.41	-13	-50.41	V
2.457	-73.41	Pk	32.5	-31.5	11.5	-60.91	-13	-47.91	V
2.464	-70.01	Pk	32.6	-31.6	12.1	-56.91	-13	-43.91	H
3.230	-71.35	Pk	32.9	-30.5	11.2	-57.75	-13	-44.75	V
3.246	-71.3	Pk	33	-30.6	11.2	-57.70	-13	-44.70	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC10 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 817.25MHz									
1.721	-66.49	Pk	29.5	-32.4	11.9	-57.49	-13	-44.49	H
1.723	-66.35	Pk	29.4	-32.3	13.7	-55.55	-13	-42.55	V
2.639	-66.85	Pk	32.7	-31	11.9	-53.25	-13	-40.25	H
2.642	-67.5	Pk	32.6	-31	11.8	-54.10	-13	-41.10	V
3.306	-67.44	Pk	32.9	-30.3	10.9	-53.94	-13	-40.94	V
3.309	-68.1	Pk	32.8	-30.3	11.3	-54.30	-13	-41.30	H
Mid Channel 820MHz									
1.593	-66.17	Pk	28.1	-32.5	11.7	-58.87	-13	-45.87	V
1.600	-77.52	Pk	28.1	-32.4	11.9	-69.92	-13	-56.92	H
2.387	-67.25	Pk	32.2	-31.5	12.6	-53.95	-13	-40.95	H
2.397	-67.11	Pk	32.3	-31.4	13.1	-53.11	-13	-40.11	V
3.191	-67.27	Pk	32.9	-30.5	11.2	-53.67	-13	-40.67	V
3.195	-67.65	Pk	32.9	-30.6	11.5	-53.85	-13	-40.85	H
High Channel 822.75MHz									
1.677	-65.23	Pk	28.9	-32.4	10.9	-57.83	-13	-44.83	V
1.682	-66.54	Pk	28.9	-32.4	12.1	-57.94	-13	-44.94	H
2.383	-67.84	Pk	32.2	-31.4	12.7	-54.34	-13	-41.34	H
2.386	-67.51	Pk	32.2	-31.5	12.6	-54.21	-13	-41.21	V
3.296	-67.53	Pk	32.9	-30.3	11.4	-53.53	-13	-40.53	H
3.306	-67.19	Pk	32.9	-30.3	10.9	-53.69	-13	-40.69	V

Pk - Peak detector

CDMA BC0

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC0 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.7MHz									
1.739	-67.31	Pk	29.7	-32.3	12.5	-57.41	-13	-44.41	H
1.745	-67.46	Pk	29.7	-32.2	12.3	-57.66	-13	-44.66	V
2.366	-67.55	Pk	32.1	-31.4	13.2	-53.65	-13	-40.65	H
2.396	-67.1	Pk	32.3	-31.4	13.2	-53.00	-13	-40.00	V
3.233	-67.14	Pk	32.9	-30.6	11.5	-53.34	-13	-40.34	H
3.271	-66.85	Pk	32.9	-30.5	10.4	-54.05	-13	-41.05	V
Mid Channel 836.52MHz									
1.668	-65.38	Pk	28.8	-32.4	12.6	-56.38	-13	-43.38	H
1.672	-75.51	Av	28.9	-32.3	11.5	-67.41	-13	-54.41	V
2.459	-76.92	Av	32.5	-31.6	11.6	-64.42	-13	-51.42	V
2.464	-66.68	Pk	32.6	-31.6	12.1	-53.58	-13	-40.58	H
3.292	-67.86	Pk	32.9	-30.3	11.2	-54.06	-13	-41.06	V
3.294	-68.41	Pk	32.9	-30.3	11.2	-54.61	-13	-41.61	H
High Channel 848.31MHz									
1.717	-65.94	Pk	29.4	-32.3	11.8	-57.04	-13	-44.04	H
1.719	-66.87	Pk	29.5	-32.4	13.8	-55.97	-13	-42.97	V
2.388	-67.9	Pk	32.2	-31.5	12.7	-54.50	-13	-41.50	H
2.403	-68.37	Pk	32.3	-31.3	12.3	-55.07	-13	-42.07	V
3.507	-68.59	Pk	34	-30.3	11.4	-53.49	-13	-40.49	V
3.525	-67.75	Pk	33.1	-30.1	10.9	-53.85	-13	-40.85	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC0 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.7MHz									
1.645	-66.95	Pk	28.7	-32.4	12.3	-58.35	-13	-45.35	H
1.649	-66.2	Pk	28.7	-32.3	11.2	-58.60	-13	-45.60	V
2.633	-67.89	Pk	32.6	-31	12	-54.29	-13	-41.29	H
2.636	-67.05	Pk	32.7	-31	12.9	-52.45	-13	-39.45	V
3.493	-77.12	Pk	33.2	-30.3	11.8	-62.42	-13	-49.42	V
3.505	-68.41	Pk	34.2	-30.2	11.5	-52.91	-13	-39.91	H
Mid Channel 836.52MHz									
1.704	-66.79	Pk	29.1	-32.1	12.9	-56.89	-13	-43.89	V
1.712	-66.3	Pk	29.2	-32.3	12	-57.4	-13	-44.4	H
2.467	-67.33	Pk	32.6	-31.5	11.9	-54.33	-13	-41.33	H
2.467	-67.1	Pk	32.6	-31.5	11.1	-54.90	-13	-41.90	V
3.292	-67.53	Pk	32.9	-30.3	11.1	-53.83	-13	-40.83	H
3.293	-67.53	Pk	32.9	-30.3	11.2	-53.73	-13	-40.73	V
High Channel 848.31MHz									
1.663	-66.04	Pk	28.8	-32.4	12.2	-57.44	-13	-44.44	H
2.355	-67.11	Pk	32	-31.6	12.9	-53.81	-13	-40.81	H
3.480	-68.15	Pk	32.8	-30.4	11.6	-54.15	-13	-41.15	H
1.650	-66.62	Pk	28.7	-32.3	11.2	-59.02	-13	-46.02	V
2.343	-65.89	Pk	31.9	-31.6	12.9	-52.69	-13	-39.69	V
3.229	-67.74	Pk	32.9	-30.5	11.2	-54.14	-13	-41.14	V

Pk - Peak detector

CDMA BC1

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC1 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1851.25MHz									
3.719	-66.55	Pk	33.3	-29.9	11.1	-52.05	-13	-39.05	V
3.732	-67.58	Pk	33.4	-29.9	11.2	-52.88	-13	-39.88	H
5.549	-69.51	Pk	34.8	-28.1	10.8	-52.01	-13	-39.01	H
5.559	-69.34	Pk	34.8	-28.2	10.8	-51.94	-13	-38.94	V
7.456	-71.28	Pk	35.8	-24.7	10.8	-49.38	-13	-36.38	V
7.477	-71.5	Pk	35.8	-24.6	10.7	-49.60	-13	-36.60	H
Mid Channel 1880.00MHz									
3.721	-66.88	Pk	33.3	-30	11.2	-52.38	-13	-39.38	H
3.732	-66.8	Pk	33.4	-29.9	11.4	-51.90	-13	-38.90	V
5.386	-69.3	Pk	34.9	-28.1	10.7	-51.80	-13	-38.80	V
5.413	-68.58	Pk	35	-28	11.1	-50.48	-13	-37.48	H
7.334	-70.15	Pk	35.8	-24.9	11	-48.25	-13	-35.25	V
7.390	-70.92	Pk	35.6	-24.7	10.6	-49.42	-13	-36.42	H
High Channel 1908.75MHz									
3.679	-67.68	Pk	33.2	-29.9	11.4	-52.98	-13	-39.98	V
3.690	-67.08	Pk	33.2	-29.7	11.4	-52.18	-13	-39.18	H
5.508	-69.55	Pk	34.9	-28.1	11.1	-51.65	-13	-38.65	V
5.547	-69.11	Pk	34.8	-28.1	10.9	-51.51	-13	-38.51	H
7.480	-71.81	Pk	35.7	-24.5	10.8	-49.81	-13	-36.81	V
7.499	-71.77	Pk	35.7	-24.5	10.7	-49.87	-13	-36.87	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC1 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1851.25MHz									
3.681	-66.57	Pk	33.2	-29.9	11.6	-51.67	-13	-38.67	V
3.711	-66.34	Pk	33.3	-29.8	11.1	-51.74	-13	-38.74	H
5.478	-69.28	Pk	34.9	-27.8	11.3	-50.88	-13	-37.88	V
5.550	-69.16	Pk	34.8	-28.1	10.8	-51.66	-13	-38.66	H
7.543	-71.2	Pk	35.8	-24.5	10.9	-49.00	-13	-36.00	V
7.554	-70.61	Pk	35.7	-24.4	10.9	-48.41	-13	-35.41	H
Mid Channel 1880.00MHz									
3.696	-67.12	Pk	33.2	-29.6	11.7	-51.82	-13	-38.82	V
3.706	-66.65	Pk	33.3	-29.9	11.2	-52.05	-13	-39.05	H
5.569	-68.36	Pk	34.9	-28	11.1	-50.36	-13	-37.36	V
5.574	-68.63	Pk	34.8	-28.1	10.8	-51.13	-13	-38.13	H
7.442	-70.82	Pk	35.7	-24.6	11.2	-48.52	-13	-35.52	V
7.464	-71.28	Pk	35.7	-24.7	10.6	-49.68	-13	-36.68	H
High Channel 1908.75MHz									
3.858	-67.76	Pk	33.7	-29.6	12	-51.66	-13	-38.66	H
3.871	-66.51	Pk	33.6	-29.4	11.8	-50.51	-13	-37.51	V
5.687	-68.21	Pk	34.8	-27.7	10.3	-50.81	-13	-37.81	V
5.704	-69.45	Pk	34.9	-27.6	10.6	-51.55	-13	-38.55	H
7.436	-70.62	Pk	35.8	-24.5	11.3	-48.02	-13	-35.02	V
7.438	-71.34	Pk	35.8	-24.5	11.1	-48.94	-13	-35.94	H

Pk - Peak detector

9.1.3. WCDMA

WCDMA BAND 5

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 5 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 826.4MHz									
1.663	-65.92	Pk	28.8	-32.4	12.2	-57.32	-13	-44.32	H
1.667	-65.71	Pk	28.8	-32.4	11.6	-57.71	-13	-44.71	V
2.360	-67.09	Pk	32	-31.5	12.4	-54.19	-13	-41.19	V
2.364	-66.23	Pk	32	-31.5	13.1	-52.63	-13	-39.63	H
3.362	-67.02	Pk	32.8	-30.3	11.1	-53.42	-13	-40.42	H
3.376	-67.46	Pk	32.8	-30.2	12	-52.86	-13	-39.86	V
Mid Channel, 836.6MHz									
1.713	-65.39	Pk	29.2	-32.3	13.1	-55.39	-13	-42.39	V
1.718	-65.58	Pk	29.4	-32.3	11.8	-56.68	-13	-43.68	H
2.630	-67.11	Pk	32.6	-31.1	11.9	-53.71	-13	-40.71	H
2.637	-67.39	Pk	32.7	-31	12.8	-52.89	-13	-39.89	V
3.717	-65.14	Pk	33.3	-29.9	11	-50.74	-13	-37.74	V
3.775	-65.39	Pk	33.6	-29.9	11.3	-50.39	-13	-37.39	H
High Channel, 846.6MHz									
1.872	-75.02	Pk	31	-32	12	-64.02	-13	-51.02	H
1.879	-66.69	Pk	30.8	-32	11.3	-56.59	-13	-43.59	V
2.362	-67.73	Pk	32	-31.5	12.4	-54.83	-13	-41.83	V
2.364	-67.76	Pk	32	-31.4	13.1	-54.06	-13	-41.06	H
3.052	-67.6	Pk	33.2	-30.8	12.1	-53.10	-13	-40.10	H
3.057	-67.36	Pk	33.3	-30.7	11.8	-52.96	-13	-39.96	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 5 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 826.4MHz									
1.652	-67	Pk	28.7	-32.4	11.2	-59.50	-13	-46.50	V
1.661	-66.45	Pk	28.8	-32.4	12.2	-57.85	-13	-44.85	H
2.535	-67.51	Pk	32.6	-31.4	12	-54.31	-13	-41.31	V
2.545	-67.74	Pk	32.6	-31.5	11.9	-54.74	-13	-41.74	H
3.339	-67.44	Pk	32.8	-30.2	11	-53.84	-13	-40.84	V
3.342	-71.82	Pk	32.8	-30.3	10.5	-58.82	-13	-45.82	H
Mid Channel, 836.6MHz									
1.639	-66.53	Pk	28.6	-32.3	11.4	-58.83	-13	-45.83	V
1.654	-66.61	Pk	28.7	-32.4	12.2	-58.11	-13	-45.11	H
2.502	-67.61	Pk	32.6	-31.5	11.4	-55.11	-13	-42.11	V
2.506	-67.67	Pk	32.7	-31.4	11.3	-55.07	-13	-42.07	H
3.365	-68.11	Pk	32.8	-30.2	11.1	-54.41	-13	-41.41	H
3.368	-68.34	Pk	32.8	-30.1	11.6	-54.04	-13	-41.04	V
High Channel, 846.6MHz									
1.659	-66.95	Pk	28.8	-32.4	11.7	-58.85	-13	-45.85	V
1.671	-66.48	Pk	28.8	-32.3	12.7	-57.28	-13	-44.28	H
2.488	-67.66	Pk	32.6	-31.5	11.5	-55.06	-13	-42.06	V
2.508	-68.18	Pk	32.7	-31.4	11.4	-55.48	-13	-42.48	H
3.348	-68.48	Pk	32.8	-30.1	11.1	-54.68	-13	-41.68	V
3.360	-67.69	Pk	32.8	-30.2	11	-54.09	-13	-41.09	H

Pk - Peak detector

WCDMA BAND 2

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 2 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.815	-66.98	Pk	33.7	-29.5	11.2	-51.58	-13	-38.58	V
3.822	-65.62	Pk	33.7	-29.4	11.5	-49.82	-13	-36.82	H
5.822	-68.9	Pk	35.1	-27.3	10.9	-50.20	-13	-37.20	V
5.827	-68.88	Pk	35.1	-27.3	10.5	-50.58	-13	-37.58	H
7.553	-70.99	Pk	35.7	-24.4	10.9	-48.79	-13	-35.79	H
7.571	-71.21	Pk	35.8	-24.3	11	-48.71	-13	-35.71	V
Mid Channel, 1880.0MHz									
3.87	-66.43	Pk	33.6	-29.4	11.7	-50.53	-13	-37.53	H
3.872	-65.97	Pk	33.6	-29.5	12.1	-49.77	-13	-36.77	V
5.526	-67.32	Pk	34.8	-28	11.3	-49.22	-13	-36.22	V
5.55	-68.63	Pk	34.8	-28.1	10.8	-51.13	-13	-38.13	H
7.265	-69.76	Pk	35.8	-25	10.6	-48.36	-13	-35.36	H
7.287	-70.14	Pk	35.8	-25.1	10.9	-48.54	-13	-35.54	V
High Channel, 1907.6MHz									
3.801	-66.79	Pk	33.7	-29.6	11.3	-51.39	-13	-38.39	H
3.789	-75.69	Av	33.6	-29.7	11.5	-60.29	-13	-47.29	V
5.216	-68.18	Pk	34.6	-28.2	11.3	-50.48	-13	-37.48	V
5.256	-69.51	Pk	34.8	-28.1	10.9	-51.91	-13	-38.91	H
7.599	-70.61	Pk	35.7	-24.4	10.9	-48.41	-13	-35.41	V
7.613	-71.4	Pk	35.8	-24.4	10.8	-49.20	-13	-36.20	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 2 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.693	-64.92	Pk	33.2	-29.7	11.3	-50.12	-13	-37.12	H
3.693	-66.44	Pk	33.2	-29.7	11.6	-51.34	-13	-38.34	V
5.578	-67.34	Pk	34.9	-28	10.7	-49.74	-13	-36.74	V
5.615	-69.04	Pk	34.9	-28	10.5	-51.64	-13	-38.64	H
7.252	-70.66	Pk	35.9	-24.9	11.3	-48.36	-13	-35.36	V
7.260	-69.38	Pk	35.8	-25	10.5	-48.08	-13	-35.08	H
Mid Channel, 1880.0MHz									
3.689	-66.43	Pk	33.2	-29.7	11.7	-51.23	-13	-38.23	V
3.710	-66.88	Pk	33.3	-29.8	11.2	-52.18	-13	-39.18	H
5.524	-68.43	Pk	34.8	-28.1	11.3	-50.43	-13	-37.43	V
5.538	-69.2	Pk	34.8	-28.1	11.2	-51.30	-13	-38.30	H
7.423	-71.05	Pk	35.7	-24.5	10.8	-49.05	-13	-36.05	H
7.424	-71.29	Pk	35.7	-24.6	11.2	-48.99	-13	-35.99	V
High Channel, 1907.6MHz									
3.689	-66.89	Pk	33.2	-29.7	11.7	-51.69	-13	-38.69	V
3.715	-66.8	Pk	33.3	-29.9	10.8	-52.60	-13	-39.60	H
5.575	-68.42	Pk	34.9	-28.1	10.7	-50.92	-13	-37.92	V
5.580	-68.00	Pk	34.9	-28	10.7	-50.40	-13	-37.40	H
7.448	-70.91	Pk	35.7	-24.6	11.2	-48.61	-13	-35.61	V
7.448	-70.35	Pk	35.7	-24.6	10.8	-48.45	-13	-35.45	H

Pk - Peak detector

WCDMA BAND 4

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.498	-67.07	Pk	33.7	-30.3	11.6	-52.07	-13	-39.07	V
3.505	-67.67	Pk	34.2	-30.2	11.5	-52.17	-13	-39.17	H
5.117	-67.18	Pk	34.5	-28.5	10.9	-50.28	-13	-37.28	V
5.139	-67.95	Pk	34.6	-28.6	10.9	-51.05	-13	-38.05	H
6.817	-70.19	Pk	35.8	-25.3	10.6	-49.09	-13	-36.09	V
6.825	-70.29	Pk	35.8	-25.1	10.6	-48.99	-13	-35.99	H
Mid Channel, 1732.6MHz									
3.453	-67.08	Pk	32.8	-30.1	11.7	-52.68	-13	-39.68	V
3.458	-66.61	Pk	32.8	-30.2	10.9	-53.11	-13	-40.11	H
5.185	-67.76	Pk	34.6	-28.5	11.1	-50.56	-13	-37.56	V
5.212	-67.74	Pk	34.7	-28.2	11.3	-49.94	-13	-36.94	H
6.931	-70.58	Pk	36	-25.1	10.7	-48.98	-13	-35.98	H
6.933	-70.44	Pk	36	-25.1	11.3	-48.24	-13	-35.24	V
High Channel, 1752.6MHz									
3.495	-67.77	Pk	33.4	-30.3	11.8	-52.87	-13	-39.87	V
3.503	-66.36	Pk	34.2	-30.3	11.6	-50.86	-13	-37.86	H
5.223	-68.66	Pk	34.7	-28.1	11.2	-50.86	-13	-37.86	V
5.237	-68.61	Pk	34.7	-28.2	11.2	-50.91	-13	-37.91	H
7.042	-69.57	Pk	36	-25.2	10.5	-48.27	-13	-35.27	V
7.083	-70.29	Pk	36	-25.0	10.7	-48.59	-13	-35.59	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 4 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.392	-66.98	Pk	32.7	-30	11.1	-53.18	-13	-40.18	V
3.409	-68.04	Pk	32.8	-30.2	11.3	-54.14	-13	-41.14	H
5.103	-67.44	Pk	34.5	-28.4	11.4	-49.94	-13	-36.94	V
5.132	-68.04	Pk	34.5	-28.6	10.7	-51.44	-13	-38.44	H
6.764	-70.59	Pk	36	-25.5	10.8	-49.29	-13	-36.29	V
6.786	-70.37	Pk	35.9	-25.8	10.1	-50.17	-13	-37.17	H
Mid Channel, 1732.6MHz									
3.427	-67.33	Pk	32.8	-30.1	12.2	-52.43	-13	-39.43	V
3.441	-68.35	Pk	32.8	-30.2	11.7	-54.05	-13	-41.05	H
5.142	-66.73	Pk	34.5	-28.6	11.3	-49.53	-13	-36.53	V
5.163	-67.68	Pk	34.5	-28.5	11.6	-50.08	-13	-37.08	H
6.823	-70.76	Pk	35.8	-25.2	10.7	-49.46	-13	-36.46	V
6.827	-71.37	Pk	35.8	-25.1	10.6	-50.07	-13	-37.07	H
High Channel, 1752.6MHz									
3.424	-68.45	Pk	32.7	-30.1	12	-53.85	-13	-40.85	V
3.425	-68.53	Pk	32.7	-30.1	12.1	-53.83	-13	-40.83	H
5.105	-67.6	Pk	34.5	-28.3	11.3	-50.10	-13	-37.10	V
5.149	-67.98	Pk	34.5	-28.6	11	-51.08	-13	-38.08	H
6.861	-71.2	Pk	35.9	-25.2	10.8	-49.70	-13	-36.70	V
6.876	-70.89	Pk	35.9	-24.9	10.7	-49.19	-13	-36.19	H

Pk - Peak detector

9.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2

9.2.1. GSM

GSM 850MHz

Company:	
Project #:	12696946
Date:	4/5/2019
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM850 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.2MHz									
1.713	-65.33	Pk	29.2	-32.3	13.1	-55.33	-13	-42.33	V
1.733	-65.44	Pk	29.6	-32.4	12.5	-55.74	-13	-42.74	H
2.565	-67.42	Pk	32.3	-31.3	12.5	-53.92	-13	-40.92	H
2.634	-66.4	Pk	32.4	-31	13.0	-52.00	-13	-39.00	V
3.209	-66.82	Pk	33	-30.6	11.8	-52.62	-13	-39.62	H
3.226	-65.84	Pk	32.9	-30.6	11.0	-52.54	-13	-39.54	V
Mid Channel 836.6MHz									
3.346	-71.96	Pk	32.9	-30.2	11.0	-58.26	-13	-45.26	V
1.642	-65.19	Pk	28.6	-32.3	12.3	-56.59	-13	-43.59	H
1.648	-65.94	Pk	28.7	-32.4	12.2	-57.44	-13	-44.44	H
1.718	-65.62	Pk	29.3	-32.3	13.6	-55.02	-13	-42.02	V
2.615	-66.88	Pk	32.4	-31	12.0	-53.48	-13	-40.48	V
3.313	-66.74	Pk	32.8	-30.3	11.5	-52.74	-13	-39.74	H
High Channel 848.8MHz									
1.770	-65.86	Pk	29.8	-32	11.8	-56.26	-13	-43.26	H
1.785	-65.63	Pk	30.1	-32.4	12.9	-55.03	-13	-42.03	V
2.395	-66.65	Pk	32	-31.4	13.2	-52.85	-13	-39.85	V
2.460	-66.3	Pk	32.4	-31.6	12.4	-53.10	-13	-40.10	H
3.397	-67.92	Pk	32.8	-30.1	11.1	-54.12	-13	-41.12	V
3.415	-67.09	Pk	32.8	-30.3	11.8	-52.79	-13	-39.79	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	4/5/2019
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM850 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.2MHz									
2.375	-66.99	Pk	31.9	-31.2	12.8	-53.49	-13	-40.49	H
1.715	-65.26	Pk	29.3	-32.3	13.2	-55.06	-13	-42.06	V
1.733	-66.16	Pk	29.6	-32.4	12.6	-56.36	-13	-43.36	H
2.426	-66.91	Pk	32.3	-31.4	11.8	-54.21	-13	-41.21	V
3.194	-65.71	Pk	33	-30.6	11.1	-52.21	-13	-39.21	V
3.242	-66.37	Pk	32.9	-30.6	11.3	-52.77	-13	-39.77	H
Mid Channel 836.6MHz									
1.709	-65.39	Pk	29.2	-32.3	13.1	-55.39	-13	-42.39	V
1.641	-64.33	Pk	28.6	-32.3	12.2	-55.83	-13	-42.83	H
2.396	-67.12	Pk	32	-31.4	13.2	-53.32	-13	-40.32	V
2.511	-67.85	Pk	32.3	-31.5	11.5	-55.55	-13	-42.55	H
3.297	-66.01	Pk	32.9	-30.4	11.3	-52.21	-13	-39.21	V
3.378	-67.63	Pk	32.8	-30.1	11.3	-53.63	-13	-40.63	H
High Channel 848.8MHz									
1.667	-67.35	Pk	28.7	-32.4	12.5	-58.55	-13	-45.55	H
1.679	-64.77	Pk	28.7	-32.4	10.9	-57.57	-13	-44.57	V
3.550	-66.9	Pk	33.1	-30.2	11.5	-52.50	-13	-39.50	V
2.563	-67.18	Pk	32.3	-31.3	12.3	-53.88	-13	-40.88	H
2.633	-66.93	Pk	32.4	-31.1	13	-52.63	-13	-39.63	V
3.465	-67.33	Pk	32.9	-30.1	11.1	-53.43	-13	-40.43	H

Pk - Peak detector

GSM 1900MHz

Company:	
Project #:	12696946
Date:	4/8/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.735	-66.91	Pk	33.3	-29.9	11.5	-52.01	-13	-39.01	H
7.427	-71.2	Pk	35.7	-24.6	10.9	-49.20	-13	-36.20	H
3.792	-66.9	Pk	33.5	-29.7	11.5	-51.60	-13	-38.60	V
7.476	-71.51	Pk	35.6	-24.6	10.8	-49.71	-13	-36.71	V
5.540	-68.75	Pk	34.8	-28.2	11.2	-50.95	-13	-37.95	H
5.574	-68.5	Pk	34.9	-28.1	10.8	-50.90	-13	-37.90	V
Mid Channel, 1880MHz									
3.762	-66.12	Pk	33.4	-29.7	11.7	-50.72	-13	-37.72	H
7.518	-71.24	Pk	35.6	-24.5	10.4	-49.74	-13	-36.74	H
3.770	-66.79	Pk	33.4	-29.7	11.2	-51.89	-13	-38.89	V
7.521	-71.19	Pk	35.6	-24.5	10.6	-49.49	-13	-36.49	V
5.638	-68.26	Pk	35	-28	10.8	-50.46	-13	-37.46	V
5.639	-68.12	Pk	35	-28	10.8	-50.32	-13	-37.32	H
High Channel, 1909.8MHz									
3.822	-65.83	Pk	33.5	-29.4	11.5	-50.23	-13	-37.23	H
7.641	-70.97	Pk	35.7	-24.5	10.7	-49.07	-13	-36.07	H
3.818	-66.03	Pk	33.5	-29.5	11.4	-50.63	-13	-37.63	V
7.641	-69.9	Pk	35.7	-24.5	11.2	-47.50	-13	-34.50	V
5.730	-69.58	Pk	35	-27.5	10.6	-51.48	-13	-38.48	V
5.732	-68.71	Pk	35	-27.5	10.7	-50.51	-13	-37.51	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	4/26/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.701	-67.07	Pk	33.1	-29.8	11.2	-52.57	-13	-39.57	H
7.385	-71.02	Pk	35.6	-24.5	10.9	-49.02	-13	-36.02	H
3.699	-66.61	Pk	33.1	-29.6	11.5	-51.61	-13	-38.61	V
7.403	-71.16	Pk	35.6	-24.7	10.7	-49.56	-13	-36.56	V
5.507	-68.49	Pk	34.6	-28.1	11.1	-50.89	-13	-37.89	V
5.552	-67.79	Pk	34.8	-28.1	10.8	-50.29	-13	-37.29	H
Mid Channel, 1880.0MHz									
3.765	-65.8	Pk	33.4	-29.7	11.6	-50.50	-13	-37.50	H
7.509	-72.05	Pk	35.7	-24.5	10.6	-50.25	-13	-37.25	H
3.731	-66.61	Pk	33.3	-29.9	11.3	-51.91	-13	-38.91	V
7.481	-70.07	Pk	35.7	-24.5	10.8	-48.07	-13	-35.07	V
5.629	-68.45	Pk	35	-28.1	10.7	-50.85	-13	-37.85	V
5.643	-67.96	Pk	35	-28	10.6	-50.36	-13	-37.36	H
High Channel, 1909.8MHz									
1.667	-67.35	Pk	28.7	-32.4	12.5	-58.55	-13	-45.55	H
1.679	-64.77	Pk	28.7	-32.4	10.9	-57.57	-13	-44.57	V
3.550	-66.9	Pk	33.1	-30.2	11.5	-52.50	-13	-39.50	V
2.563	-67.18	Pk	32.3	-31.3	12.3	-53.88	-13	-40.88	H
2.633	-66.93	Pk	32.4	-31.1	13	-52.63	-13	-39.63	V
3.465	-67.33	Pk	32.9	-30.1	11.1	-53.43	-13	-40.43	H

Pk - Peak detector

9.2.2. CDMA

CDMA BC10

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	23567
Configuration:	EUT
Mode:	CDMA BC10 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 817.25MHz									
1.617	-65.84	Pk	28.3	-32.5	11.2	-58.84	-13	-45.84	V
1.629	-64.63	Pk	28.5	-32.3	11	-57.43	-13	-44.43	H
2.432	-66.45	Pk	32.6	-31.4	11.7	-53.55	-13	-40.55	V
2.453	-66.47	Pk	32.5	-31.5	12.4	-53.07	-13	-40.07	H
3.270	-67.01	Pk	32.9	-30.5	10.2	-54.41	-13	-41.41	V
3.284	-67.21	Pk	32.9	-30.3	10.9	-53.71	-13	-40.71	H
Mid Channel 820.00MHz									
1.644	-65.61	Pk	28.7	-32.4	11.5	-57.81	-13	-44.81	V
1.646	-66.39	Pk	28.7	-32.4	12.3	-57.79	-13	-44.79	H
2.45	-66.55	Pk	32.5	-31.5	12.2	-53.35	-13	-40.35	H
2.459	-67.48	Pk	32.5	-31.6	11.6	-54.98	-13	-41.98	V
3.28	-67.47	Pk	32.9	-30.4	10.6	-54.37	-13	-41.37	H
3.289	-71.65	Pk	32.9	-30.4	11.2	-57.95	-13	-44.95	V
High Channel 822.75MHz									
1.634	-65.54	Pk	28.5	-32.3	11.1	-58.24	-13	-45.24	V
1.641	-66.54	Pk	28.6	-32.3	12.3	-57.94	-13	-44.94	H
2.446	-67.21	Pk	32.5	-31.5	12.2	-54.01	-13	-41.01	V
2.459	-66.58	Pk	32.5	-31.6	12.4	-53.28	-13	-40.28	H
3.198	-67.58	Pk	32.9	-30.5	11	-54.18	-13	-41.18	V
3.238	-66.87	Pk	32.9	-30.6	11.4	-53.17	-13	-40.17	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	CDMA BC10 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 817.25MHz									
1.615	-65.54	Pk	28.3	-32.5	11.3	-58.44	-13	-45.44	V
1.620	-65.87	Pk	28.3	-32.5	11.3	-58.77	-13	-45.77	H
2.436	-66.66	Pk	32.5	-31.4	11.6	-53.96	-13	-40.96	V
2.450	-67.8	Pk	32.5	-31.5	12.3	-54.50	-13	-41.50	H
3.247	-67.52	Pk	33	-30.6	11.2	-53.92	-13	-40.92	H
3.251	-66.65	Pk	32.9	-30.5	10.7	-53.55	-13	-40.55	V
Mid Channel 820MHz									
1.635	-65.43	Pk	28.5	-32.4	11.2	-58.13	-13	-45.13	V
1.645	-66.04	Pk	28.7	-32.4	12.3	-57.44	-13	-44.44	H
2.468	-67.7	Pk	32.6	-31.5	11.1	-55.50	-13	-42.50	V
2.475	-66.55	Pk	32.5	-31.5	11.7	-53.85	-13	-40.85	H
3.276	-67.35	Pk	32.9	-30.5	10.8	-54.15	-13	-41.15	V
3.286	-67.29	Pk	32.9	-30.4	11	-53.79	-13	-40.79	H
High Channel 822.75MHz									
1.636	-66.38	Pk	28.5	-32.4	11.3	-58.98	-13	-45.98	V
1.648	-65.31	Pk	28.7	-32.4	12.1	-56.91	-13	-43.91	H
2.442	-66.83	Pk	32.5	-31.5	12	-53.83	-13	-40.83	V
2.461	-68.02	Pk	32.6	-31.6	12.4	-54.62	-13	-41.62	H
3.232	-66.33	Pk	32.9	-30.5	11.5	-52.43	-13	-39.43	H
3.237	-66.26	Pk	32.9	-30.6	11.3	-52.66	-13	-39.66	V

Pk - Peak detector

CDMA BC0

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	CDMA BC0 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.7MHz									
1.659	-65.08	Pk	28.8	-32.4	11.7	-56.98	-13	-43.98	V
1.664	-65.48	Pk	28.7	-32.4	12.3	-56.88	-13	-43.88	H
2.443	-67.61	Pk	32.5	-31.4	12.1	-54.41	-13	-41.41	V
2.459	-65.58	Pk	32.5	-31.6	12.4	-52.28	-13	-39.28	H
3.273	-66.21	Pk	32.9	-30.4	10.6	-53.11	-13	-40.11	V
3.297	-67.62	Pk	32.9	-30.4	11.4	-53.72	-13	-40.72	H
Mid Channel 836.52MHz									
1.633	-65.85	Pk	28.5	-32.3	11	-58.65	-13	-45.65	V
1.645	-66.25	Pk	28.7	-32.4	12.3	-57.65	-13	-44.65	H
2.448	-67.96	Pk	32.5	-31.5	12.1	-54.86	-13	-41.86	H
2.450	-67.36	Pk	32.5	-31.5	11.9	-54.46	-13	-41.46	V
3.285	-67.44	Pk	32.9	-30.4	11	-53.94	-13	-40.94	H
3.287	-67.19	Pk	32.9	-30.4	11.1	-53.59	-13	-40.59	V
High Channel 848.31MHz									
1.636	-65.67	Pk	28.5	-32.4	11.2	-58.37	-13	-45.37	V
1.641	-66.03	Pk	28.6	-32.3	12.2	-57.53	-13	-44.53	H
2.441	-66.44	Pk	32.5	-31.5	11.8	-53.64	-13	-40.64	V
2.452	-66.67	Pk	32.5	-31.5	12.3	-53.37	-13	-40.37	H
3.297	-67.07	Pk	32.9	-30.4	11.3	-53.27	-13	-40.27	V
3.299	-67.2	Pk	32.9	-30.4	11.5	-53.20	-13	-40.20	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	CDMA BC0 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 824.7MHz									
1.658	-66.7	Pk	28.7	-32.5	11.7	-58.80	-13	-45.80	V
1.669	-66.12	Pk	28.8	-32.3	12.7	-56.92	-13	-43.92	H
2.405	-67.65	Pk	32.3	-31.3	12.3	-54.35	-13	-41.35	V
2.411	-67.35	Pk	32.4	-31.3	11.2	-55.05	-13	-42.05	H
3.372	-68.03	Pk	32.8	-30.2	11.4	-54.03	-13	-41.03	H
3.374	-67.98	Pk	32.8	-30.2	12	-53.38	-13	-40.38	V
Mid Channel 836.52MHz									
1.711	-66.99	Pk	29.2	-32.3	13.1	-56.99	-13	-43.99	V
1.725	-66.8	Pk	29.4	-32.2	12.2	-57.40	-13	-44.40	H
2.531	-68.28	Pk	32.6	-31.4	12.1	-54.98	-13	-41.98	V
2.539	-67.52	Pk	32.6	-31.4	11.9	-54.42	-13	-41.42	H
3.346	-67.58	Pk	32.8	-30.2	10.4	-54.58	-13	-41.58	H
3.353	-67.27	Pk	32.8	-30.1	11.5	-53.07	-13	-40.07	V
High Channel 848.31MHz									
1.722	-66.59	Pk	29.5	-32.4	13.9	-55.59	-13	-42.59	V
1.725	-66.6	Pk	29.4	-32.2	12.2	-57.20	-13	-44.20	H
2.429	-67.95	Pk	32.6	-31.4	11.1	-55.65	-13	-42.65	H
2.431	-67.85	Pk	32.6	-31.4	11.7	-54.95	-13	-41.95	V
3.289	-67.45	Pk	32.9	-30.4	11.1	-53.85	-13	-40.85	H
3.366	-67.56	Pk	32.8	-30.2	11.6	-53.36	-13	-40.36	V

Pk - Peak detector

CDMA BC1

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	23567
Configuration:	EUT
Mode:	CDMA BC1 1xRTT
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1851.25MHz									
3.674	-67.27	Pk	33.2	-29.9	11.1	-52.87	-13	-39.87	V
3.687	-67.11	Pk	33.2	-29.8	11.7	-52.01	-13	-39.01	H
5.474	-69.21	Pk	34.9	-27.8	11.3	-50.81	-13	-37.81	V
5.481	-68.84	Pk	34.9	-27.8	10.9	-50.84	-13	-37.84	H
7.436	-71.10	Pk	35.8	-24.5	11	-48.80	-13	-35.80	H
7.438	-71.34	Pk	35.8	-24.5	11.3	-48.74	-13	-35.74	V
Mid Channel 1880MHz									
3.719	-66.09	Pk	33.3	-29.9	11	-51.69	-13	-38.69	H
3.719	-66.65	Pk	33.3	-29.9	11.1	-52.15	-13	-39.15	V
5.504	-68.16	Pk	34.9	-27.9	11.1	-50.06	-13	-37.06	V
5.534	-68.81	Pk	34.8	-28	11.2	-50.81	-13	-37.81	H
7.385	-70.39	Pk	35.8	-24.5	11.2	-47.89	-13	-34.89	V
7.386	-70.58	Pk	35.7	-24.5	10.8	-48.58	-13	-35.58	H
High Channel 1908.75MHz									
3.685	-66.57	Pk	33.2	-29.8	12	-51.17	-13	-38.17	V
3.701	-67.08	Pk	33.2	-29.8	11.2	-52.48	-13	-39.48	H
5.485	-69.12	Pk	34.9	-27.9	11.2	-50.92	-13	-37.92	V
5.523	-68.44	Pk	34.8	-28.1	11	-50.74	-13	-37.74	H
7.312	-69.92	Pk	35.7	-24.9	11.4	-47.72	-13	-34.72	V
7.347	-70.26	Pk	35.8	-24.8	10.7	-48.56	-13	-35.56	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/3/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	CDMA BC1 EV-DO Rev A
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1851.25MHz									
3.719	-65.77	Pk	33.3	-29.9	11	-51.37	-13	-38.37	H
7.420	-71.28	Pk	35.8	-24.6	10.7	-49.38	-13	-36.38	H
3.707	-66.65	Pk	33.3	-29.8	11.3	-51.85	-13	-38.85	V
7.377	-70.55	Pk	35.7	-24.4	11.3	-47.95	-13	-34.95	V
5.567	-67.09	Pk	34.9	-28	11	-49.19	-13	-36.19	H
5.636	-68.40	Pk	34.8	-28.1	10.7	-51.00	-13	-38.00	V
Mid Channel 1880MHz									
3.759	-66.68	Pk	33.5	-29.7	11.5	-51.38	-13	-38.38	H
3.760	-66.12	Pk	33.5	-29.7	11.1	-51.22	-13	-38.22	V
5.661	-68.57	Pk	34.8	-27.8	10.9	-50.67	-13	-37.67	V
5.668	-68.79	Pk	34.8	-27.8	10.7	-51.09	-13	-38.09	H
7.554	-70.98	Pk	35.7	-24.4	11.1	-48.58	-13	-35.58	V
7.556	-71.22	Pk	35.7	-24.4	10.9	-49.02	-13	-36.02	H
High Channel 1908.75MHz									
3.857	-66.66	Pk	33.7	-29.7	11.4	-51.26	-13	-38.26	V
3.879	-66.22	Pk	33.6	-29.4	11.7	-50.32	-13	-37.32	H
5.720	-69.19	Pk	35	-27.5	10.5	-51.19	-13	-38.19	H
5.720	-69.10	Pk	35	-27.5	10.6	-51.00	-13	-38.00	V
7.831	-70.72	Pk	35.8	-24.5	11.2	-48.22	-13	-35.22	V
7.853	-70.99	Pk	35.9	-24.6	11.2	-48.49	-13	-35.49	H

Pk - Peak detector

9.2.3. WCDMA

WCDMA BAND 5

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	WCDMA Band 5 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 826.4MHz									
3.261	-67.7	Pk	33	-30.5	10.5	-54.70	-13	-41.70	V
1.645	-66.58	Pk	28.7	-32.4	11.5	-58.78	-13	-45.78	V
1.651	-66.12	Pk	28.7	-32.3	12.1	-57.62	-13	-44.62	H
2.472	-67.88	Pk	32.6	-31.5	11.8	-54.98	-13	-41.98	H
2.479	-67.26	Pk	32.6	-31.4	11.4	-54.66	-13	-41.66	V
3.273	-67.43	Pk	32.9	-30.4	10.3	-54.63	-13	-41.63	H
Mid Channel, 836.6MHz									
1.666	-65.07	Pk	28.7	-32.4	12.4	-56.37	-13	-43.37	H
3.336	-67.10	Pk	32.8	-30.1	10.7	-53.70	-13	-40.70	H
1.673	-65.88	Pk	28.9	-32.3	11.3	-57.98	-13	-44.98	V
2.503	-67.00	Pk	32.6	-31.5	11.3	-54.60	-13	-41.60	V
2.507	-67.64	Pk	32.7	-31.4	11.3	-55.04	-13	-42.04	H
3.339	-66.49	Pk	32.8	-30.2	11	-52.89	-13	-39.89	V
High Channel, 846.6MHz									
1.692	-66.24	Pk	28.9	-32.3	12.5	-57.14	-13	-44.14	H
1.684	-66.62	Pk	28.9	-32.4	11.1	-59.02	-13	-46.02	V
2.527	-66.47	Pk	32.6	-31.5	12.2	-53.17	-13	-40.17	V
2.532	-66.41	Pk	32.6	-31.3	12.1	-53.01	-13	-40.01	H
3.373	-67.9	Pk	32.8	-30.2	11.9	-53.40	-13	-40.40	V
3.380	-66.8	PK	32.8	-30	11.3	-52.7	-13	-39.7	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 5 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 826.4MHz									
1.723	-66.65	Pk	29.5	-32.3	13.8	-55.65	-13	-42.65	V
1.734	-67.59	Pk	29.7	-32.3	12.6	-57.59	-13	-44.59	H
2.548	-69.35	Pk	32.6	-31.4	12.1	-56.05	-13	-43.05	H
2.548	-71.35	Pk	32.6	-31.5	12.2	-58.05	-13	-45.05	H
3.355	-68.28	Pk	32.8	-30.1	11.6	-53.98	-13	-40.98	V
3.37	-69.29	Pk	32.8	-30.1	11.4	-55.19	-13	-42.19	H
Mid Channel, 836.6MHz									
1.712	-67.24	Pk	29.2	-32.3	13.1	-57.24	-13	-44.24	V
1.719	-66.6	Pk	29.4	-32.4	11.8	-57.80	-13	-44.80	H
2.530	-66.57	Pk	32.6	-31.4	12.2	-53.17	-13	-40.17	H
2.548	-67.95	Pk	32.6	-31.5	12.1	-54.75	-13	-41.75	V
3.422	-67.92	Pk	32.7	-30.1	11.9	-53.42	-13	-40.42	V
3.423	-69.03	Pk	32.7	-30.1	12.1	-54.33	-13	-41.33	H
High Channel, 846.6MHz									
1.666	-66.79	Pk	28.7	-32.4	11.6	-58.89	-13	-45.89	V
1.668	-66.75	Pk	28.8	-32.4	12.6	-57.75	-13	-44.75	H
2.389	-68.31	Pk	32.2	-31.5	12.7	-54.91	-13	-41.91	V
2.399	-68.04	Pk	32.3	-31.4	12	-55.14	-13	-42.14	H
3.295	-68.54	Pk	32.9	-30.3	11.2	-54.74	-13	-41.74	V
3.300	-69.14	Pk	32.9	-30.4	11.5	-55.14	-13	-42.14	H

Pk - Peak detector

WCDMA BAND 2

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 2 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.676	-73.96	Pk	33.2	-29.8	11.2	-59.36	-13	-46.36	V
3.698	-66.70	Pk	33.2	-29.6	11.2	-51.90	-13	-38.90	H
5.707	-69.00	Pk	34.8	-27.7	10.7	-51.20	-13	-38.20	V
5.734	-69.33	Pk	34.9	-27.5	10.5	-51.43	-13	-38.43	H
7.195	-70.22	Pk	36	-24.9	10.9	-48.22	-13	-35.22	V
7.212	-70.23	Pk	36	-25.2	10.3	-49.13	-13	-36.13	H
Mid Channel, 1880MHz									
3.683	-66.94	Pk	33.2	-29.9	11.9	-51.74	-13	-38.74	V
3.703	-66.23	Pk	33.2	-29.8	11.2	-51.63	-13	-38.63	H
5.548	-67.92	Pk	34.8	-28.1	11	-50.22	-13	-37.22	V
5.571	-68.30	Pk	34.9	-28	11	-50.40	-13	-37.40	H
7.411	-71.11	Pk	35.7	-24.7	10.9	-49.21	-13	-36.21	V
7.419	-70.58	Pk	35.8	-24.6	10.7	-48.68	-13	-35.68	H
High Channel, 1907.6MHz									
3.683	-66.43	Pk	33.2	-29.9	11.8	-51.33	-13	-38.33	V
3.701	-66.41	Pk	33.2	-29.7	11.2	-51.71	-13	-38.71	H
5.538	-68.37	Pk	34.8	-28.1	11.5	-50.17	-13	-37.17	V
5.583	-68.15	Pk	34.9	-28.1	10.7	-50.65	-13	-37.65	H
7.392	-70.92	Pk	35.6	-24.8	10.5	-49.62	-13	-36.62	H
7.397	-70.61	Pk	35.6	-24.7	10.9	-48.81	-13	-35.81	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 2 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.719	-67.14	Pk	33.3	-29.9	11.1	-52.64	-13	-39.64	V
3.742	-66.75	Pk	33.4	-29.9	11.2	-52.05	-13	-39.05	H
5.612	-68.49	Pk	34.9	-28.1	10.8	-50.89	-13	-37.89	V
5.680	-67.74	Pk	34.8	-27.7	10.4	-50.24	-13	-37.24	H
7.189	-76.3	Pk	36	-25	10.3	-55.00	-13	-42.00	H
7.202	-76.54	Pk	35.9	-25	10.9	-54.74	-13	-41.74	V
Mid Channel, 1880MHz									
3.725	-67.03	Pk	33.4	-30	11.5	-52.13	-13	-39.13	V
3.776	-66.76	Pk	33.6	-29.9	11.2	-51.86	-13	-38.86	H
5.540	-69.32	Pk	34.8	-28.2	11.2	-51.52	-13	-38.52	H
5.573	-68.39	Pk	34.9	-28	10.8	-50.69	-13	-37.69	V
5.573	-75.14	Pk	34.9	-28	10.8	-57.44	-13	-44.44	V
7.113	-69.82	Pk	36.1	-25.3	10.4	-48.62	-13	-35.62	V
High Channel, 1907.6MHz									
3.707	-67.14	Pk	33.3	-29.8	11.3	-52.34	-13	-39.34	V
3.725	-67.29	Pk	33.4	-30	11.5	-52.39	-13	-39.39	H
5.632	-68.43	Pk	34.8	-28.1	10.7	-51.03	-13	-38.03	V
5.658	-69.01	Pk	34.8	-27.9	10.8	-51.31	-13	-38.31	H
7.527	-70.42	Pk	35.7	-24.6	10.4	-48.92	-13	-35.92	H
7.548	-70.87	Pk	35.8	-24.4	11.0	-48.47	-13	-35.47	V

Pk - Peak detector

WCDMA BAND 4

Company:	
Project #:	12696946
Date:	5/31/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.381	-67.53	Pk	32.8	-30	11.6	-53.13	-13	-40.13	V
3.403	-67.2	Pk	32.7	-30.1	11.1	-53.50	-13	-40.50	H
5.120	-67.41	Pk	34.6	-28.6	10.8	-50.61	-13	-37.61	V
5.137	-67.45	Pk	34.6	-28.6	10.9	-50.55	-13	-37.55	H
6.837	-70.48	Pk	35.9	-25.2	10.2	-49.58	-13	-36.58	H
6.842	-70.52	Pk	35.9	-25.2	10.5	-49.32	-13	-36.32	V
Mid Channel, 1732.6MHz									
3.388	-67.17	Pk	32.7	-30.1	11.2	-53.37	-13	-40.37	V
3.405	-66.96	Pk	32.7	-30.2	11.1	-53.36	-13	-40.36	H
5.109	-67.6	Pk	34.4	-28.3	11.2	-50.30	-13	-37.30	V
5.128	-68.09	Pk	34.5	-28.5	10.6	-51.49	-13	-38.49	H
6.837	-70.47	Pk	35.9	-25.2	10.3	-49.47	-13	-36.47	V
6.859	-69.75	Pk	35.9	-25.2	10.4	-48.65	-13	-35.65	H
High Channel, 1752.6MHz									
3.398	-67.91	Pk	32.7	-30.1	11.1	-54.21	-13	-41.21	V
3.411	-67.75	Pk	32.8	-30.2	11.5	-53.65	-13	-40.65	H
5.113	-66.74	Pk	34.4	-28.4	11.1	-49.64	-13	-36.64	V
5.131	-67.55	Pk	34.5	-28.6	10.6	-51.05	-13	-38.05	H
6.833	-70.78	Pk	35.8	-25.2	10.4	-49.78	-13	-36.78	H
6.837	-70.89	Pk	35.9	-25.2	10.3	-49.89	-13	-36.89	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.727	-66.76	Pk	33.4	-29.9	11.4	-51.86	-13	-38.86	V
3.74	-66.69	Pk	33.4	-29.9	11.4	-51.79	-13	-38.79	H
5.337	-69.54	Pk	35.1	-28.1	10.4	-52.14	-13	-39.14	V
5.393	-68.5	Pk	34.9	-28	10.7	-50.90	-13	-37.90	H
6.636	-70.86	Pk	36	-26.1	10.9	-50.06	-13	-37.06	V
6.646	-70.54	Pk	35.8	-26	10.5	-50.24	-13	-37.24	H
Mid Channel, 1732.6MHz									
3.748	-65.78	Pk	33.5	-29.8	11.6	-50.48	-13	-37.48	V
3.754	-66.32	Pk	33.5	-29.6	11.6	-50.82	-13	-37.82	H
5.561	-68.95	Pk	34.8	-28.2	10.8	-51.55	-13	-38.55	V
5.621	-69.29	Pk	34.8	-28	10.4	-52.09	-13	-39.09	H
7.144	-70.09	Pk	36.2	-25.2	10.7	-48.39	-13	-35.39	V
7.183	-70.2	Pk	36	-25.1	10.4	-48.90	-13	-35.90	H
High Channel, 1752.6MHz									
3.415	-77.64	Av	32.8	-30.3	11.7	-63.44	-13	-50.44	V
3.686	-74.54	Pk	33.2	-29.8	11.7	-59.44	-13	-46.44	H
5.51	-69.7	Pk	34.9	-28.1	11.1	-51.8	-13	-38.8	V
5.517	-69.11	Pk	34.8	-28.1	11	-51.41	-13	-38.41	H
7.270	-70.33	Pk	35.8	-25	10.5	-49.03	-13	-36.03	H
7.291	-70.6	Pk	35.8	-25	10.9	-48.90	-13	-35.90	V

Pk - Peak detector

9.3. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 3

9.3.1. GSM

GSM 1900MHz

Company:	
Project #:	12696946
Date:	4/29/19
Test Engineer:	31300
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
1.500	-60.41	Pk	27.9	-32.5	12.3	-52.71	-13	-39.71	V
2.702	-65.56	Pk	32.4	-31	11.6	-52.56	-13	-39.56	V
4.423	-66.34	Pk	33.9	-29.2	11.4	-50.24	-13	-37.24	H
6.00	-60.11	Pk	35.4	-27.3	11.3	-40.71	-13	-27.71	H
13.621	-70.49	Pk	38.9	-20.8	10.9	-41.49	-13	-28.49	V
13.626	-70.26	Pk	38.6	-20.9	11.2	-41.36	-13	-28.36	H
Mid Channel, 1880MHz									
4.857	-66.37	Pk	34.1	-28.6	11.4	-49.47	-13	-36.47	H
1.500	-61.54	Pk	27.9	-32.5	12.3	-53.84	-13	-40.84	V
2.500	-64.39	Pk	32.4	-31.5	11.6	-51.89	-13	-38.89	V
3.111	-66.71	Pk	33	-30.5	11.8	-52.41	-13	-39.41	H
6.000	-60.73	Pk	35.4	-27.3	11.3	-41.33	-13	-28.33	H
6.000	-64.24	Pk	35.4	-27.3	11.0	-45.14	-13	-32.14	V
High Channel, 1909.8MHz									
3.820	-59.16	Pk	33.5	-29.5	11.6	-43.56	-13	-30.56	H
1.500	-61.7	Pk	27.9	-32.5	12.3	-54.00	-13	-41.00	V
3.820	-60.53	Pk	33.5	-29.5	11.4	-45.13	-13	-32.13	V
2.500	-62.36	Pk	32.4	-31.5	11.6	-49.86	-13	-36.86	V
3.129	-66.95	Pk	33	-30.6	11.6	-52.95	-13	-39.95	H
13.613	-71.25	Pk	38.9	-20.7	10.8	-42.25	-13	-29.25	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	4/29/19
Test Engineer:	31300
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
4.848	-66.62	Pk	34.1	-28.7	11	-50.22	-13	-37.22	H
10.837	-71.93	Pk	37.9	-20.3	10.2	-44.13	-13	-31.13	H
1.500	-60.17	Pk	27.9	-32.5	12.3	-52.47	-13	-39.47	V
3.875	-65.65	Pk	33.6	-29.5	12.2	-49.35	-13	-36.35	V
2.500	-62.04	Pk	32.4	-31.5	11.7	-49.44	-13	-36.44	V
3.206	-66.41	Pk	33	-30.7	11.8	-52.31	-13	-39.31	H
Mid Channel, 1880MHz									
2.765	-66	Pk	32.4	-31.1	12.3	-52.4	-13	-39.4	H
3.898	-65.84	Pk	33.6	-29.4	11.1	-50.54	-13	-37.54	H
1.500	-60.8	Pk	27.9	-32.5	12.3	-53.1	-13	-40.1	V
2.500	-61.92	Pk	32.4	-31.5	11.6	-49.42	-13	-36.42	V
6.500	-64.16	Pk	35.5	-26	10.9	-43.76	-13	-30.76	H
9.719	-71.07	Pk	36.9	-22.3	11	-45.47	-13	-32.47	V
High Channel, 1909.8MHz									
3.819	-58.07	Pk	33.5	-29.5	11.6	-42.47	-13	-29.47	H
5.032	-65.87	Pk	34.1	-28.8	11.1	-49.47	-13	-36.47	H
7.252	-68.97	Pk	35.6	-24.9	10.7	-47.57	-13	-34.57	H
1.500	-60.46	Pk	27.9	-32.5	12.4	-52.66	-13	-39.66	V
3.820	-58.35	Pk	33.5	-29.5	11.4	-42.95	-13	-29.95	V
2.500	-62.77	Pk	32.4	-31.5	11.6	-50.27	-13	-37.27	V

Pk - Peak detector

9.3.2. WCDMA

WCDMA BAND 2

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 2 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.693	-66.59	Pk	33.2	-29.7	11.6	-51.49	-13	-38.49	V
3.702	-66.83	Pk	33.2	-29.8	11.2	-52.23	-13	-39.23	H
5.530	-68.67	Pk	34.8	-27.9	11.4	-50.37	-13	-37.37	V
5.540	-68.73	Pk	34.8	-28.2	11.2	-50.93	-13	-37.93	H
7.363	-70.32	Pk	35.7	-24.6	11.3	-47.92	-13	-34.92	V
7.394	-70.53	Pk	35.6	-24.7	10.6	-49.03	-13	-36.03	H
Mid Channel, 1880.0MHz									
3.411	-68.19	Pk	32.8	-30.2	11.3	-54.29	-13	-41.29	V
3.428	-67.5	Pk	32.8	-30.1	12	-52.80	-13	-39.80	H
5.157	-67.73	Pk	34.6	-28.6	11.3	-50.43	-13	-37.43	V
5.173	-68.22	Pk	34.6	-28.5	11.5	-50.62	-13	-37.62	H
6.828	-71.09	Pk	35.8	-25.1	10.8	-49.59	-13	-36.59	V
6.835	-70.31	Pk	35.9	-25.2	10.3	-49.31	-13	-36.31	H
High Channel, 1907.6MHz									
3.604	-66.34	Pk	33.1	-29.9	11	-52.14	-13	-39.14	V
3.615	-67.53	Pk	33.2	-29.7	11.1	-52.93	-13	-39.93	H
5.172	-68.12	Pk	34.6	-28.5	11.4	-50.62	-13	-37.62	V
5.233	-68.76	Pk	34.7	-28.3	11.3	-51.06	-13	-38.06	H
6.957	-70.97	Pk	35.9	-25.1	10.2	-49.97	-13	-36.97	H
6.987	-70.44	Pk	36	-25.2	10.9	-48.74	-13	-35.74	V

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT only
Mode:	WCDMA Band 2 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.735	-66.15	Pk	33.4	-29.9	11.7	-50.95	-13	-37.95	V
3.745	-66.56	Pk	33.4	-29.9	11.2	-51.86	-13	-38.86	H
5.573	-68.43	Pk	34.9	-28.1	10.8	-50.83	-13	-37.83	H
5.582	-68.14	Pk	34.9	-28	10.8	-50.44	-13	-37.44	V
7.390	-71.68	Pk	35.6	-24.7	10.8	-49.98	-13	-36.98	V
7.394	-70.82	Pk	35.6	-24.7	10.6	-49.32	-13	-36.32	H
Mid Channel, 1880.0MHz									
3.639	-67.24	Pk	33.2	-29.6	11.3	-52.34	-13	-39.34	V
3.673	-67.22	Pk	33.2	-29.9	11.6	-52.32	-13	-39.32	H
5.592	-68.92	Pk	34.9	-28	10.9	-51.12	-13	-38.12	V
5.593	-68.80	Pk	34.9	-28	10.7	-51.20	-13	-38.20	H
7.399	-71.96	Pk	35.7	-24.6	10.6	-50.26	-13	-37.26	H
7.403	-71.05	Pk	35.7	-24.7	10.8	-49.25	-13	-36.25	V
High Channel, 1907.6MHz									
3.714	-66.53	Pk	33.3	-29.9	11	-52.13	-13	-39.13	V
3.730	-66.27	Pk	33.4	-29.9	11.2	-51.57	-13	-38.57	H
5.543	-68.63	Pk	34.8	-28.1	11.1	-50.83	-13	-37.83	V
5.556	-67.98	Pk	34.8	-28	10.8	-50.38	-13	-37.38	H
7.444	-70.81	Pk	35.7	-24.6	11.2	-48.51	-13	-35.51	V
7.457	-71.32	Pk	35.7	-24.7	10.5	-49.82	-13	-36.82	H

Pk - Peak detector

WCDMA BAND 4

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.418	-77.44	Pk	32.8	-30.3	11.8	-63.14	-13	-50.14	V
3.446	-68.00	Pk	32.7	-30.2	11.6	-53.90	-13	-40.90	H
5.264	-68.63	Pk	34.8	-28	10.8	-51.03	-13	-38.03	V
5.273	-68.71	Pk	34.9	-27.9	11.4	-50.31	-13	-37.31	H
6.964	-70.32	Pk	35.8	-25.1	10.7	-48.92	-13	-35.92	V
6.999	-70.67	Pk	35.9	-25.1	10.5	-49.37	-13	-36.37	H
Mid Channel, 1732.6MHz									
3.351	-66.9	Pk	32.8	-30.1	10.7	-53.50	-13	-40.50	H
3.357	-68.27	Pk	32.8	-30.1	11.6	-53.97	-13	-40.97	V
5.147	-68.49	Pk	34.5	-28.6	11.2	-51.39	-13	-38.39	V
5.158	-67.85	Pk	34.5	-28.6	11.3	-50.65	-13	-37.65	H
6.827	-70.98	Pk	35.8	-25.1	10.6	-49.68	-13	-36.68	H
6.838	-70.81	Pk	35.9	-25.2	10.3	-49.81	-13	-36.81	V
High Channel, 1752.6MHz									
3.468	-68.43	Pk	32.8	-30.2	11.2	-54.63	-13	-41.63	H
3.469	-68.22	Pk	32.8	-30.3	11.6	-54.12	-13	-41.12	V
5.080	-68.51	Pk	34.4	-28.7	10.5	-52.31	-13	-39.31	H
5.103	-67.83	Pk	34.5	-28.4	11.4	-50.33	-13	-37.33	V
6.836	-75.65	Pk	35.9	-25.2	10.3	-54.65	-13	-41.65	V
6.855	-70.06	Pk	35.8	-25.3	10.3	-49.26	-13	-36.26	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.415	-68.92	Pk	32.8	-30.3	11.7	-54.72	-13	-41.72	V
3.415	-79.41	Pk	32.8	-30.3	11.7	-65.21	-13	-52.21	V
3.450	-68.86	Pk	32.8	-30.1	11.5	-54.66	-13	-41.66	H
5.212	-67.8	Pk	34.7	-28.3	11.3	-50.10	-13	-37.10	H
6.634	-75.87	Pk	36	-26.1	10.8	-55.17	-13	-42.17	V
6.699	-69.92	Pk	35.9	-25.8	10.4	-49.42	-13	-36.42	H
Mid Channel, 1732.6MHz									
3.491	-68.02	Pk	33.1	-30.2	11.8	-53.32	-13	-40.32	V
3.532	-68.27	Pk	33.1	-30.3	11	-54.47	-13	-41.47	H
5.092	-67.7	Pk	34.4	-28.5	11.1	-50.70	-13	-37.70	V
5.109	-68.4	Pk	34.4	-28.3	11.3	-51.00	-13	-38.00	H
6.904	-70.84	Pk	35.9	-25	10	-49.94	-13	-36.94	H
6.911	-71.39	Pk	36	-25.2	10.5	-50.09	-13	-37.09	V
High Channel, 1752.6MHz									
3.407	-67.74	Pk	32.8	-30.2	11.3	-53.84	-13	-40.84	V
3.432	-68.63	Pk	32.8	-30.1	11.8	-54.13	-13	-41.13	H
5.117	-67.9	Pk	34.5	-28.5	10.9	-51.00	-13	-38.00	V
5.131	-68.22	Pk	34.5	-28.6	10.6	-51.72	-13	-38.72	H
6.810	-70.38	Pk	35.8	-25.5	10.2	-49.88	-13	-36.88	H
6.814	-71.25	Pk	35.8	-25.4	10.6	-50.25	-13	-37.25	V

Pk - Peak detector

9.4. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4

9.4.1. GSM

GSM 1900MHz

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.701	-66.84	Pk	33.2	-29.7	11.2	-52.14	-13	-39.14	H
7.391	-71.08	Pk	35.6	-24.8	10.5	-49.78	-13	-36.78	H
3.682	-67.05	Pk	33.2	-29.9	11.8	-51.95	-13	-38.95	V
7.406	-70.76	Pk	35.7	-24.7	10.7	-49.06	-13	-36.06	V
5.530	-68.95	Pk	34.8	-27.9	11.4	-50.65	-13	-37.65	V
5.535	-68.37	Pk	34.8	-28	11.3	-50.27	-13	-37.27	H
Mid Channel, 1880MHz									
3.753	-66.09	Pk	33.5	-29.6	11.7	-50.49	-13	-37.49	H
7.533	-70.82	Pk	35.8	-24.5	10.5	-49.02	-13	-36.02	H
3.746	-65.52	Pk	33.5	-29.9	11.4	-50.52	-13	-37.52	V
7.500	-70.64	Pk	35.7	-24.5	11.0	-48.44	-13	-35.44	V
5.623	-68.22	Pk	34.8	-28	10.5	-50.92	-13	-37.92	V
5.641	-67.89	Pk	34.9	-28	10.7	-50.29	-13	-37.29	H
High Channel, 1909.8MHz									
3.817	-67.06	Pk	33.7	-29.5	11.6	-51.26	-13	-38.26	H
7.623	-70.44	Pk	35.8	-24.4	10.8	-48.24	-13	-35.24	H
3.807	-66.35	Pk	33.7	-29.4	11.3	-50.75	-13	-37.75	V
7.572	-80.3	Pk	35.8	-24.3	10.9	-57.90	-13	-44.90	V
5.697	-68.56	Pk	34.8	-27.7	10.5	-50.96	-13	-37.96	V
5.716	-69.06	Pk	35	-27.5	10.5	-51.06	-13	-38.06	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/26/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE	Margin (dB)	Polarity
Low Channel, 1850.2MHz									
3.705	-66.57	Pk	33.3	-29.9	11.2	-51.97	-13	-38.97	H
7.474	-71.52	Pk	35.8	-24.6	10.6	-49.72	-13	-36.72	H
3.694	-65.75	Pk	33.2	-29.7	11.7	-50.55	-13	-37.55	V
3.694	-70.48	Pk	33.2	-29.7	11.7	-55.28	-13	-42.28	V
7.469	-70.36	Pk	35.7	-24.7	10.6	-48.76	-13	-35.76	V
5.551	-68.49	Pk	34.8	-28.1	10.8	-50.99	-13	-37.99	H
Mid Channel, 1880MHz									
3.758	-66.12	Pk	33.5	-29.7	11.5	-50.82	-13	-37.82	H
7.516	-71.43	Pk	35.7	-24.5	10.5	-49.73	-13	-36.73	H
3.766	-66.79	Pk	33.6	-29.7	11.2	-51.69	-13	-38.69	V
7.521	-70.85	Pk	35.7	-24.5	10.6	-49.05	-13	-36.05	V
5.632	-68.37	Pk	34.8	-28.1	10.7	-50.97	-13	-37.97	V
5.638	-68.32	Pk	34.8	-28.1	10.8	-50.82	-13	-37.82	H
High Channel, 1909.8MHz									
3.815	-66.01	Pk	33.7	-29.5	11.5	-50.31	-13	-37.31	H
7.616	-70.19	Pk	35.7	-24.4	10.9	-47.99	-13	-34.99	H
3.815	-66.52	Pk	33.7	-29.5	11.3	-51.02	-13	-38.02	V
7.590	-73.88	Pk	35.7	-24.4	10.7	-51.88	-13	-38.88	V
5.711	-68.99	Pk	34.9	-27.6	10.6	-51.09	-13	-38.09	H
5.724	-69.38	Pk	34.9	-27.4	10.6	-51.28	-13	-38.28	V

Pk - Peak detector

9.4.2. WCDMA

WCDMA BAND 2

Company:	
Project #:	12696946
Date:	6/1/19
Test Engineer:	12501
Configuration:	EUT Only
Mode:	WCDMA Band 2 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.700	-65.48	Pk	33.2	-29.6	11.2	-50.68	-13	-37.68	H
7.429	-70.42	Pk	35.7	-24.6	10.8	-48.52	-13	-35.52	H
3.694	-66.65	Pk	33.2	-29.7	11.7	-51.45	-13	-38.45	V
7.393	-71.38	Pk	35.6	-24.8	10.8	-49.78	-13	-36.78	V
5.525	-68.45	Pk	34.8	-28	11.3	-50.35	-13	-37.35	V
5.547	-68.24	Pk	34.8	-28.1	10.9	-50.64	-13	-37.64	H
Mid Channel, 1880MHz									
3.753	-66.13	Pk	33.5	-29.6	11.7	-50.53	-13	-37.53	H
7.528	-71.49	Pk	35.8	-24.5	10.5	-49.69	-13	-36.69	H
3.758	-75.58	Pk	33.5	-29.7	11.1	-60.68	-13	-47.68	V
7.551	-71.18	Pk	35.8	-24.4	11	-48.78	-13	-35.78	V
5.603	-68.33	Pk	34.9	-28	10.5	-50.93	-13	-37.93	H
5.620	-76.22	Pk	34.8	-28	10.6	-58.82	-13	-45.82	V
High Channel, 1907.6MHz									
3.812	-66.08	Pk	33.7	-29.4	11.2	-50.58	-13	-37.58	H
7.520	-71.08	Pk	35.7	-24.5	10.4	-49.48	-13	-36.48	H
3.801	-66.86	Pk	33.7	-29.6	11.4	-51.36	-13	-38.36	V
7.508	-71.46	Pk	35.8	-24.5	11	-49.16	-13	-36.16	V
5.715	-69.21	Pk	34.9	-27.5	10.6	-51.21	-13	-38.21	V
5.727	-69.48	Pk	34.8	-27.4	10.5	-51.58	-13	-38.58	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 2 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1852.4MHz									
3.633	-68.26	Pk	33.2	-29.5	11.1	-53.46	-13	-40.46	V
3.649	-66.79	Pk	33.2	-29.8	10.4	-52.99	-13	-39.99	H
5.505	-68.55	Pk	34.9	-28	11.1	-50.55	-13	-37.55	V
5.521	-68.93	Pk	34.8	-28.1	11	-51.23	-13	-38.23	H
7.375	-71.28	Pk	35.7	-24.5	11.4	-48.68	-13	-35.68	V
7.387	-71.13	Pk	35.7	-24.6	10.7	-49.33	-13	-36.33	H
Mid Channel, 1880.0MHz									
3.711	-67.04	Pk	33.3	-29.8	11.2	-52.34	-13	-39.34	V
3.737	-66.62	Pk	33.4	-29.9	11.6	-51.52	-13	-38.52	H
5.550	-68.82	Pk	34.8	-28.1	11	-51.12	-13	-38.12	V
5.560	-68.77	Pk	34.8	-28.2	10.6	-51.57	-13	-38.57	H
7.370	-70.56	Pk	35.7	-24.7	11.5	-48.06	-13	-35.06	V
7.392	-71.23	Pk	35.6	-24.8	10.5	-49.93	-13	-36.93	H
High Channel, 1907.6MHz									
3.686	-66.7	Pk	33.2	-29.8	11.9	-51.40	-13	-38.40	V
3.709	-66.4	Pk	33.3	-29.8	11.2	-51.70	-13	-38.70	H
5.528	-69.03	Pk	34.8	-28	11.3	-50.93	-13	-37.93	V
5.553	-69.34	Pk	34.8	-28	10.8	-51.74	-13	-38.74	H
7.375	-71.01	Pk	35.7	-24.5	11.4	-48.41	-13	-35.41	V
7.398	-70.61	Pk	35.7	-24.6	10.6	-48.91	-13	-35.91	H

Pk - Peak detector

WCDMA BAND 4

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	39006
Configuration:	EUT Only
Mode:	WCDMA Band 4 Rel 99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Only Channel, 1712.4MHz									
3.366	-68.13	Pk	32.8	-30.1	11.2	-54.23	-13	-41.23	H
3.370	-67.65	Pk	32.8	-30.1	11.7	-53.25	-13	-40.25	V
5.169	-68.51	Pk	34.5	-28.5	11.6	-50.91	-13	-37.91	V
5.209	-68.26	Pk	34.7	-28.4	11.2	-50.76	-13	-37.76	H
6.839	-70.86	Pk	35.9	-25.2	10.3	-49.86	-13	-36.86	H
6.864	-70.05	Pk	35.9	-25.1	10.9	-48.35	-13	-35.35	V
Mid Channel, 1732.6MHz									
3.534	-69.4	Pk	33.1	-30.3	11.4	-55.20	-13	-42.20	V
3.557	-67.89	Pk	33	-30.1	10.9	-54.09	-13	-41.09	H
5.154	-67.89	Pk	34.6	-28.6	11.3	-50.59	-13	-37.59	V
5.163	-68.1	Pk	34.5	-28.5	11.6	-50.50	-13	-37.50	H
6.981	-70.57	Pk	36	-25.3	10.6	-49.27	-13	-36.27	V
7.010	-71.36	Pk	35.9	-25	10.6	-49.86	-13	-36.86	H
High Channel, 1752.6MHz									
3.487	-68.92	Pk	33	-30.1	11.4	-54.62	-13	-41.62	V
3.519	-69.27	Pk	33.2	-30.2	11.3	-54.97	-13	-41.97	H
5.144	-67.78	Pk	34.5	-28.6	11.3	-50.58	-13	-37.58	V
5.159	-67.65	Pk	34.5	-28.5	11.4	-50.25	-13	-37.25	H
6.687	-70.71	Pk	35.9	-25.9	11	-49.71	-13	-36.71	V
6.715	-70.89	Pk	35.9	-25.8	10.1	-50.69	-13	-37.69	H

Pk - Peak detector

Company:	
Project #:	12696946
Date:	6/2/19
Test Engineer:	23567
Configuration:	EUT Only
Mode:	WCDMA Band 4 HSDPA
Chamber #:	Chamber B

Frequency (GHz)	MeterReading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 1712.4MHz									
3.392	-67.65	Pk	32.7	-30	11.2	-53.75	-13	-40.75	V
3.419	-68.44	Pk	32.8	-30.2	11.9	-53.94	-13	-40.94	H
5.099	-67.07	Pk	34.5	-28.5	11.4	-49.67	-13	-36.67	V
5.119	-68.26	Pk	34.6	-28.5	10.9	-51.26	-13	-38.26	H
6.856	-71.28	Pk	35.8	-25.3	10.4	-50.38	-13	-37.38	H
6.856	-70.89	Pk	35.8	-25.3	10.7	-49.69	-13	-36.69	V
Mid Channel, 1732.6MHz									
3.376	-68.4	Pk	32.8	-30.2	12	-53.80	-13	-40.80	V
3.392	-81.76	Pk	32.7	-30	11.2	-67.86	-13	-54.86	H
4.662	-73.21	Pk	34.2	-29.1	10.6	-57.51	-13	-44.51	H
4.718	-67.98	Pk	34.1	-28.9	11	-51.78	-13	-38.78	V
6.708	-70.68	Pk	35.9	-25.8	10.6	-49.98	-13	-36.98	V
6.733	-70.83	Pk	35.9	-25.9	10.2	-50.63	-13	-37.63	H
High Channel, 1752.6MHz									
3.438	-68.8	Pk	32.8	-30.3	11.8	-54.50	-13	-41.50	V
3.449	-67.52	Pk	32.8	-30.1	11.6	-53.22	-13	-40.22	H
5.166	-68.09	Pk	34.5	-28.5	11.6	-50.49	-13	-37.49	V
5.184	-69.04	Pk	34.6	-28.5	11	-51.94	-13	-38.94	H
6.887	-71.5	Pk	35.8	-24.8	10.8	-49.70	-13	-36.70	V
6.892	-71.23	Pk	35.8	-24.8	10.4	-49.83	-13	-36.83	H

Pk - Peak detector

10. SETUP PHOTOS

Please see setup photo report 12607353-EP1V1

END OF REPORT