


VERTICAL RESULT

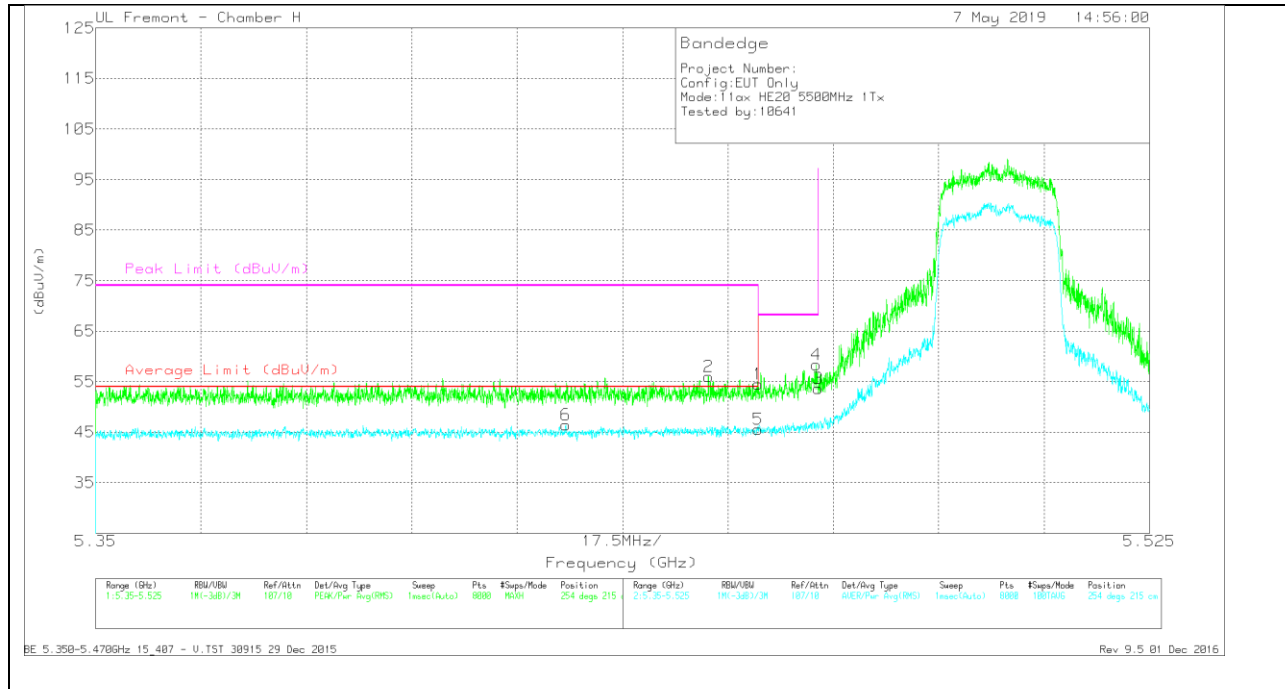


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.29	Pk	34.6	-20.4	54.49	-	-	74	-19.51	254	215	V
2	* 5.452	41.78	Pk	34.6	-20.4	55.98	-	-	74	-18.02	254	215	V
5	* 5.46	31.33	RMS	34.6	-20.4	45.53	54	-8.47	-	-	254	215	V
6	* 5.428	32.26	RMS	34.6	-20.4	46.46	54	-7.54	-	-	254	215	V
3	5.47	39.59	Pk	34.5	-20.5	53.59	-	-	68.2	-14.61	254	215	V
4	5.47	44.41	Pk	34.5	-20.5	58.41	-	-	68.2	-9.79	254	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

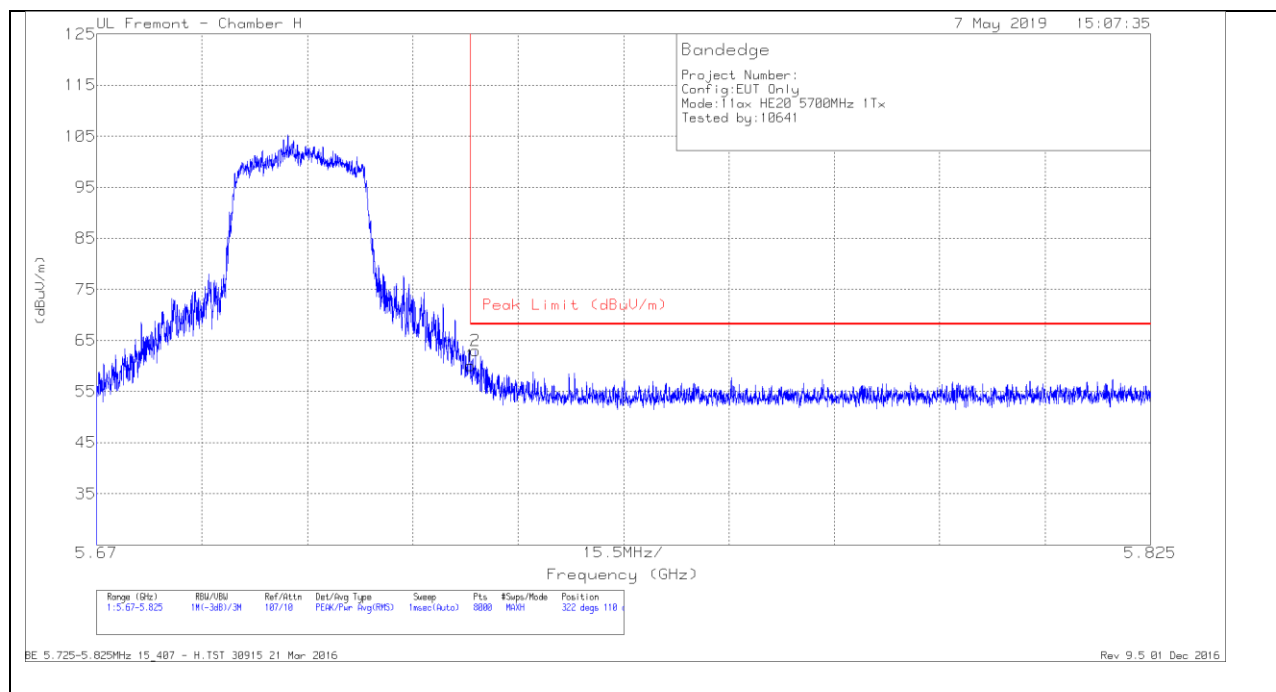BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.61	Pk	35.1	-20.7	60.01	68.2	-8.19	322	110	H
2	5.726	48.64	Pk	35.1	-20.7	63.04	68.2	-5.16	322	110	H


Pk - Peak detector

VERTICAL RESULT

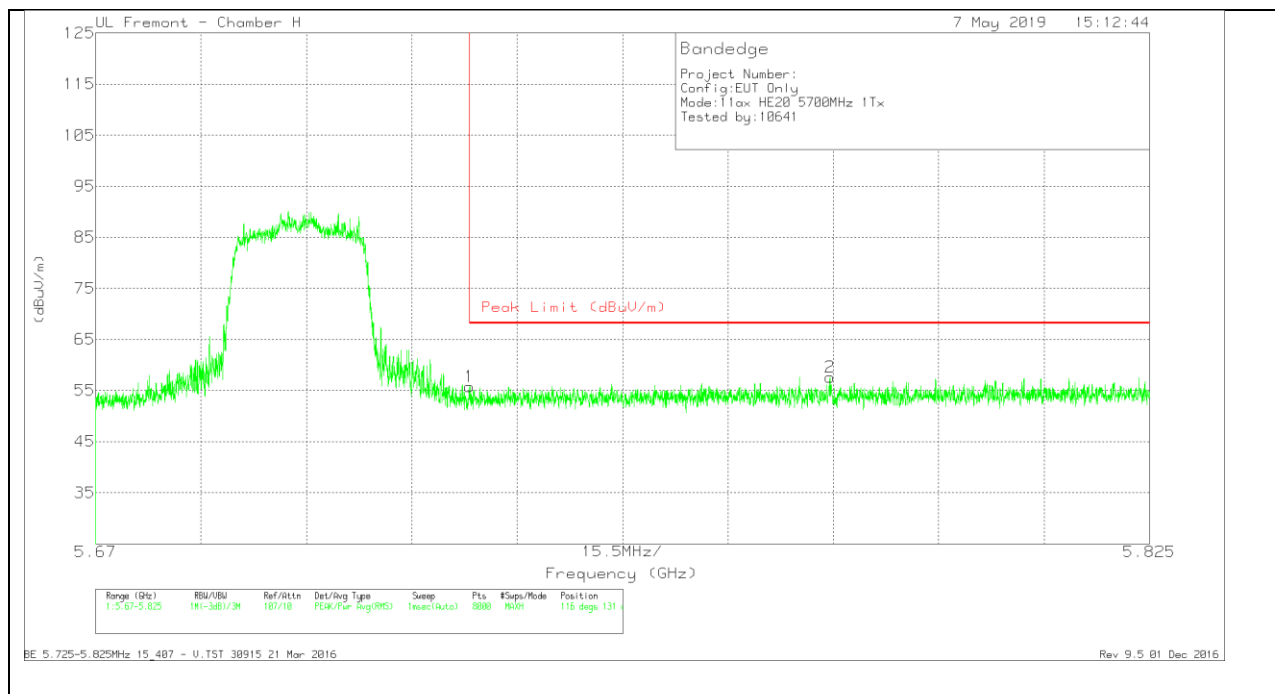

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.39	Pk	35.1	-20.7	55.79	68.2	-12.41	116	131	V
2	5.778	42.85	Pk	35.4	-20.6	57.65	68.2	-10.55	116	131	V

Pk - Peak detector

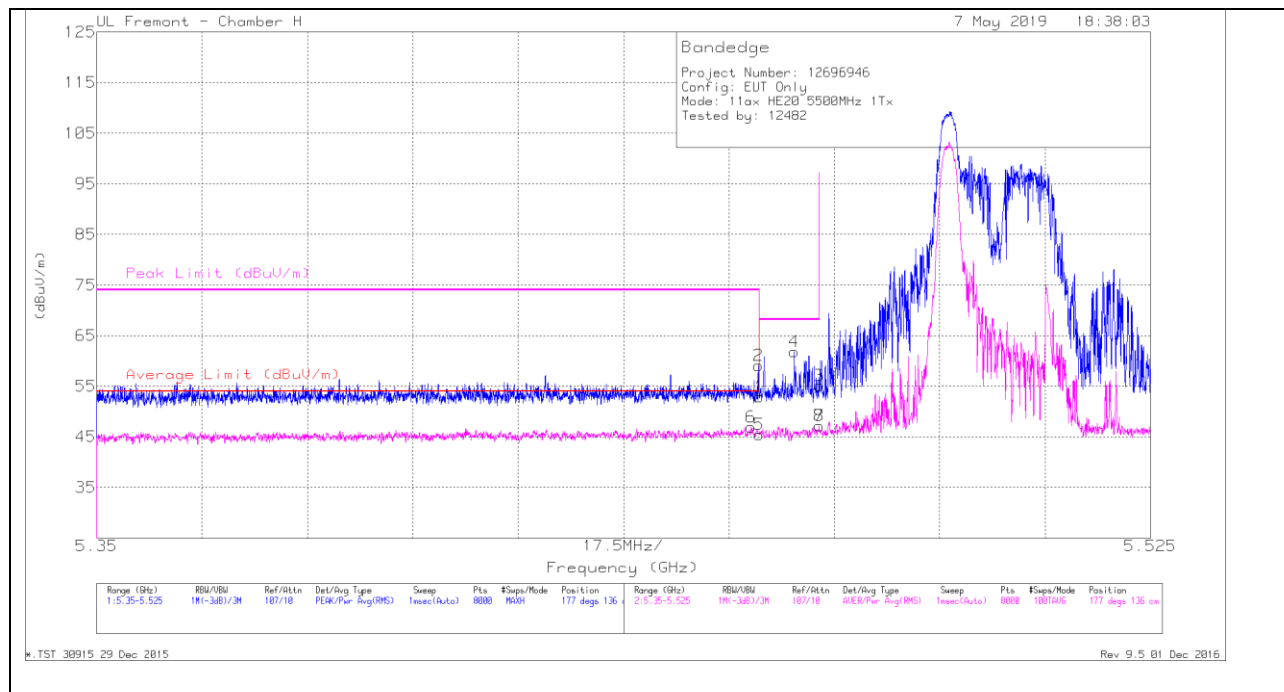
1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T136 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.73	Pk	34.6	-20.4	52.93	-	-	74	-21.07	177	136	H
2	* 5.46	44.92	Pk	34.6	-20.4	59.12	-	-	74	-14.88	177	136	H
5	* 5.46	31.27	RMS	34.6	-20.4	45.47	54	-8.53	-	-	177	136	H
6	* 5.459	32.71	RMS	34.6	-20.4	46.91	54	-7.09	-	-	177	136	H
4	5.466	47.81	Pk	34.5	-20.5	61.81	-	-	68.2	-6.39	177	136	H
3	5.47	41.11	Pk	34.5	-20.5	55.11	-	-	68.2	-13.09	177	136	H
7	5.47	33.24	RMS	34.5	-20.5	47.24	-	-	-	-	177	136	H
8	5.47	33.21	RMS	34.5	-20.5	47.21	-	-	-	-	177	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT

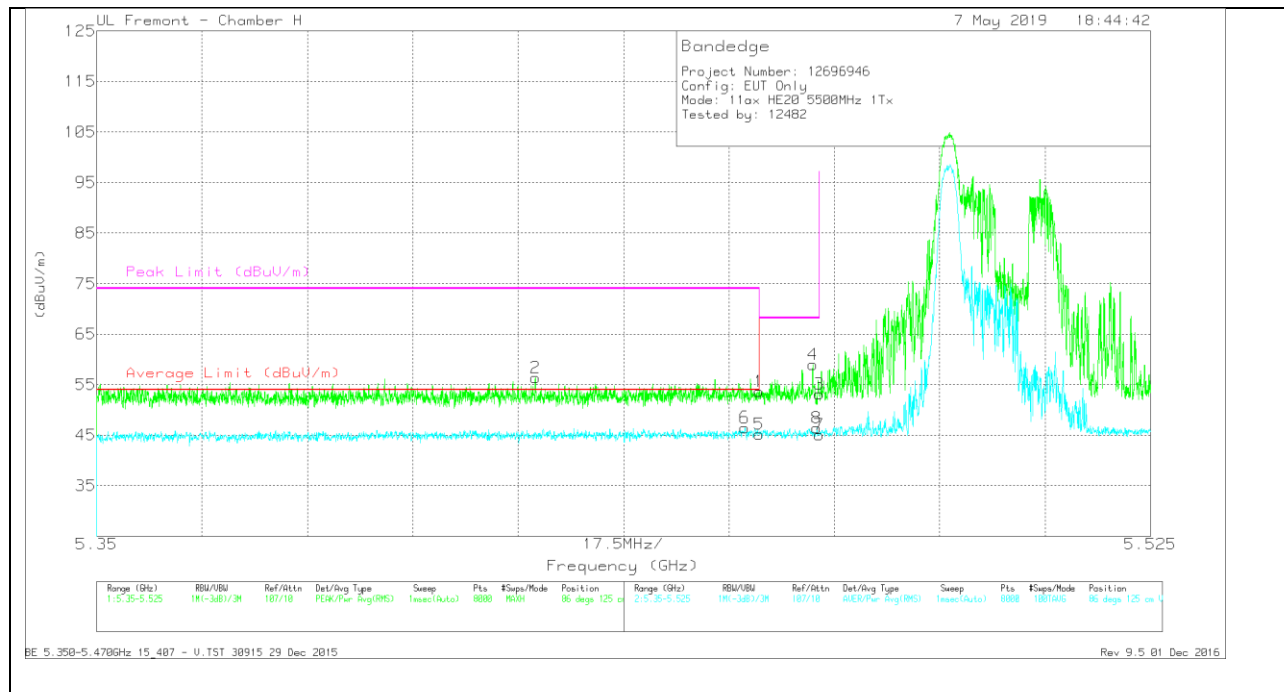


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.49	Pk	34.6	-20.4	53.69	-	-	74	-20.31	86	125	V
2	* 5.423	42.15	Pk	34.6	-20.4	56.35	-	-	74	-17.65	86	125	V
5	* 5.46	31.02	RMS	34.6	-20.4	45.22	54	-8.78	-	-	86	125	V
6	* 5.458	32.3	RMS	34.6	-20.4	46.5	54	-7.5	-	-	86	125	V
4	5.469	44.96	Pk	34.5	-20.5	58.96	-	-	68.2	-9.24	86	125	V
3	5.47	39.12	Pk	34.5	-20.5	53.12	-	-	68.2	-15.08	86	125	V
7	5.47	31.02	RMS	34.5	-20.5	45.02	-	-	-	-	86	125	V
8	5.47	32.42	RMS	34.5	-20.5	46.42	-	-	-	-	86	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

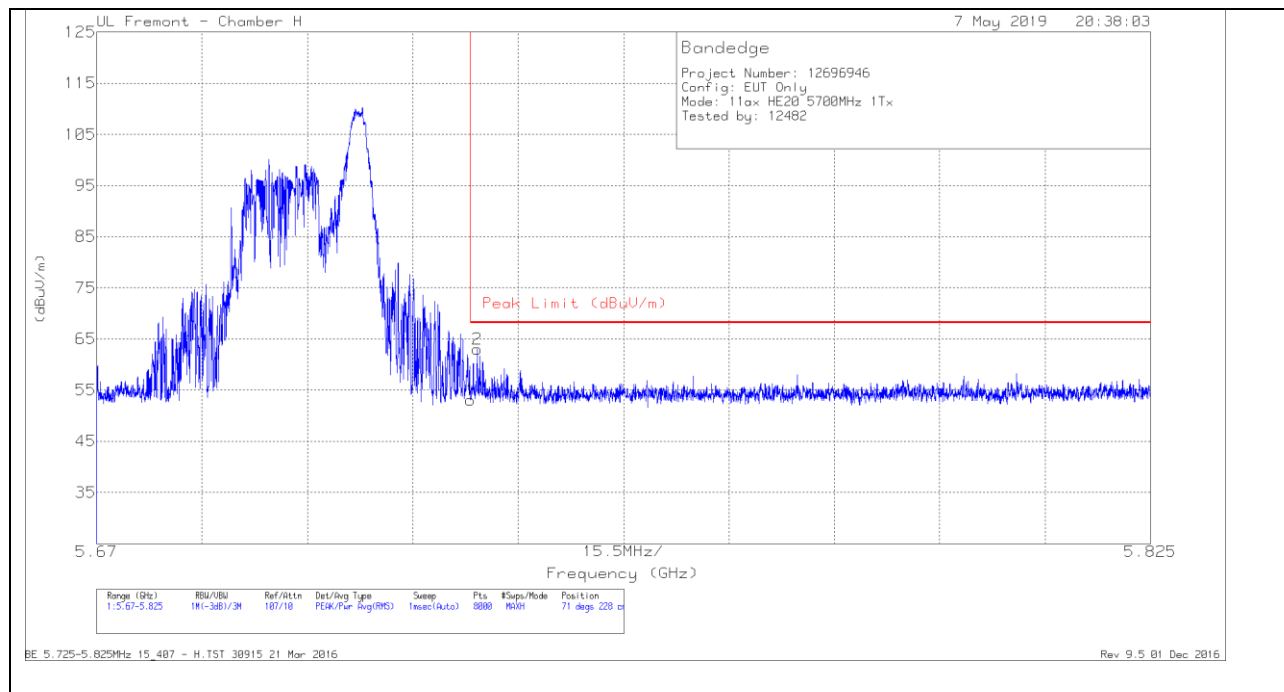1TX Antenna 5 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.72	Pk	35.1	-20.7	53.12	68.2	-15.08	71	228	H
2	5.726	48.65	Pk	35.1	-20.7	63.05	68.2	-5.15	71	228	H


Pk - Peak detector

VERTICAL RESULT

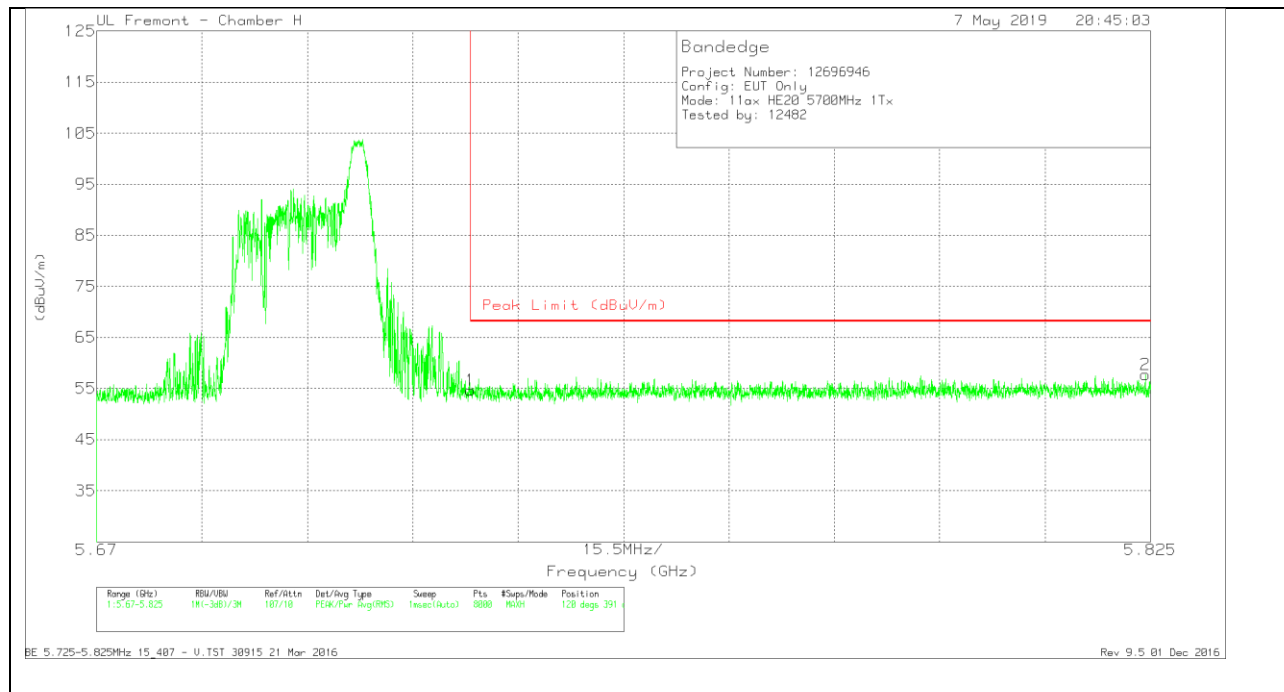

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.3	Pk	35.1	-20.7	54.7	68.2	-13.5	120	391	V
2	5.824	42.74	Pk	35.5	-20.5	57.74	68.2	-10.46	120	391	V

Pk - Peak detector

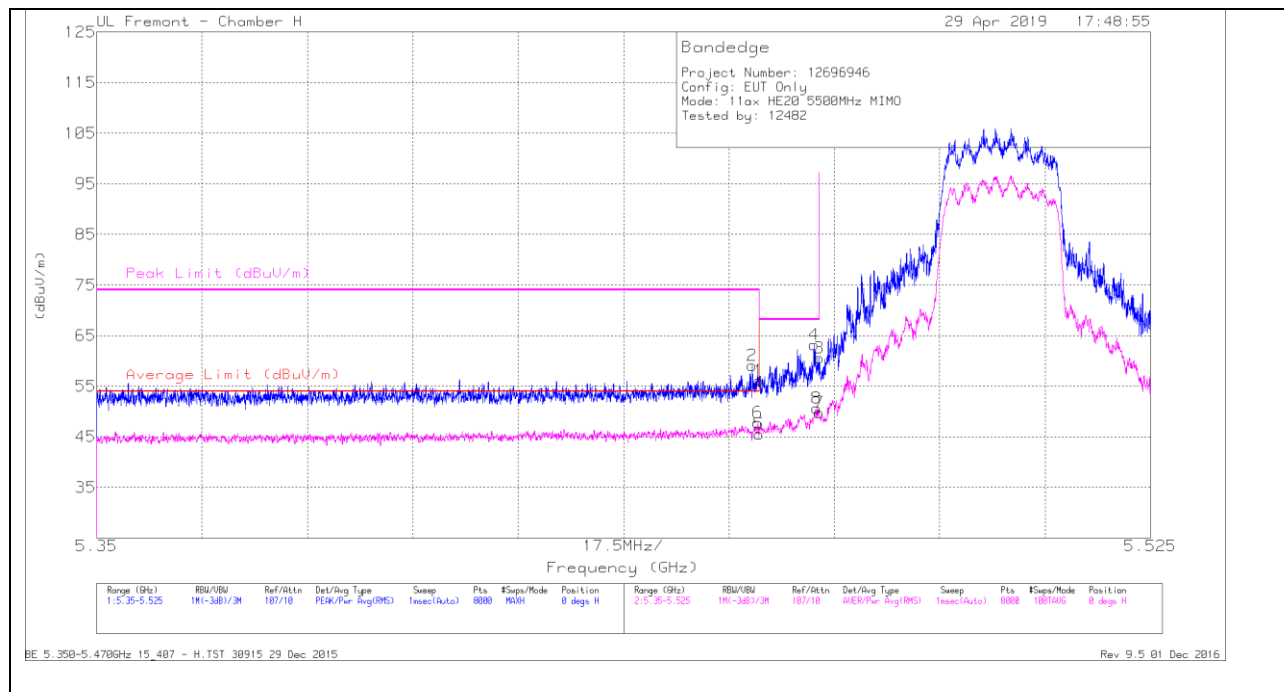BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.9	Pk	34.6	-20.4	56.1	-	-	74	-17.9	0	338	H
2	* 5.459	44.88	Pk	34.6	-20.4	59.08	-	-	74	-14.92	0	338	H
5	* 5.46	31.38	RMS	34.6	-20.4	45.58	54	-8.42	-	-	0	338	H
6	* 5.46	33.61	RMS	34.6	-20.4	47.81	54	-6.19	-	-	0	338	H
4	5.469	49.17	Pk	34.5	-20.5	63.17	-	-	68.2	-5.03	0	338	H
3	5.47	46.64	Pk	34.5	-20.5	60.64	-	-	68.2	-7.56	0	338	H
7	5.47	35.74	RMS	34.5	-20.5	49.74	-	-	-	-	0	338	H
8	5.47	36.66	RMS	34.5	-20.5	50.66	-	-	-	-	0	338	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

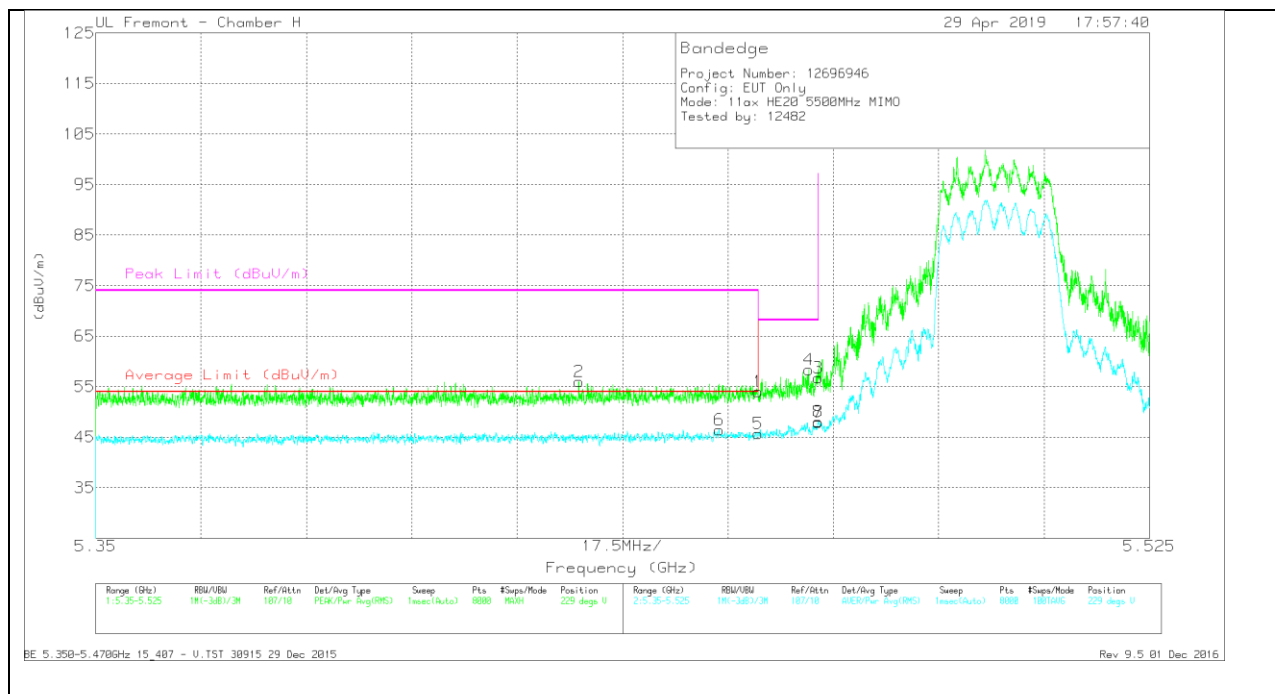


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.84	Pk	34.6	-20.4	54.04	-	-	74	-19.96	229	313	V
2	* 5.43	41.81	Pk	34.6	-20.4	56.01	-	-	74	-17.99	229	313	V
5	* 5.46	31.55	RMS	34.6	-20.4	45.75	54	-8.25	-	-	229	313	V
6	* 5.454	32.28	RMS	34.6	-20.4	46.48	54	-7.52	-	-	229	313	V
4	5.468	44.34	Pk	34.5	-20.5	58.34	-	-	68.2	-9.86	229	313	V
3	5.47	42.79	Pk	34.5	-20.5	56.79	-	-	68.2	-11.41	229	313	V
7	5.47	33.97	RMS	34.5	-20.5	47.97	-	-	-	-	229	313	V
8	5.47	34.02	RMS	34.5	-20.5	48.02	-	-	-	-	229	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

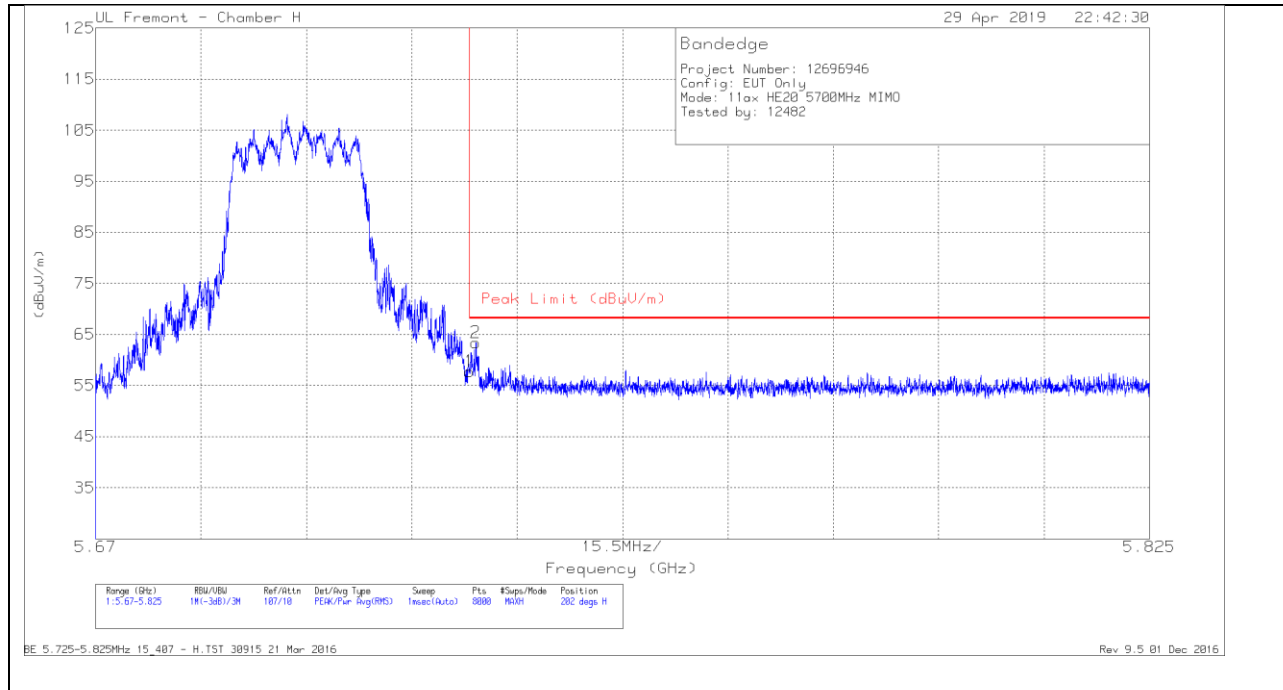BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.39	Pk	35.1	-20.7	57.79	68.2	-10.41	202	273	H
2	5.726	49.04	Pk	35.1	-20.7	63.44	68.2	-4.76	202	273	H



Pk - Peak detector

VERTICAL RESULT

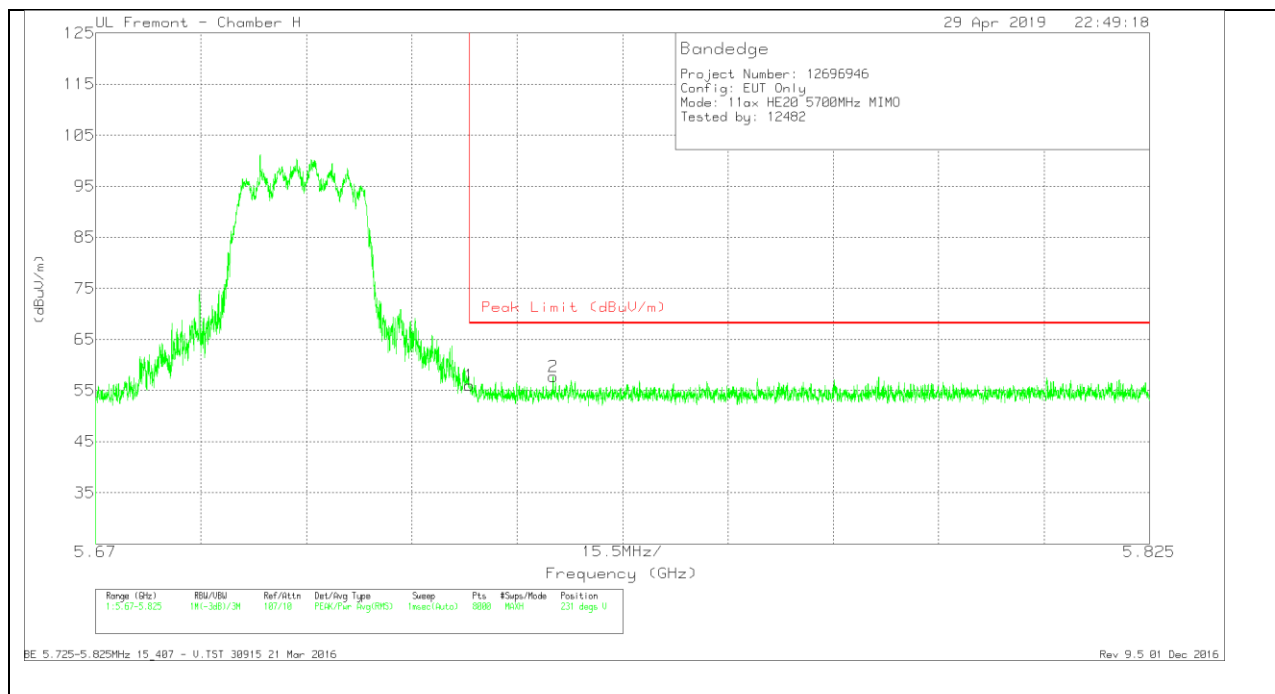

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.58	Pk	35.1	-20.7	55.98	68.2	-12.22	231	284	V
2	5.737	43.13	Pk	35.2	-20.6	57.73	68.2	-10.47	231	284	V

Pk - Peak detector

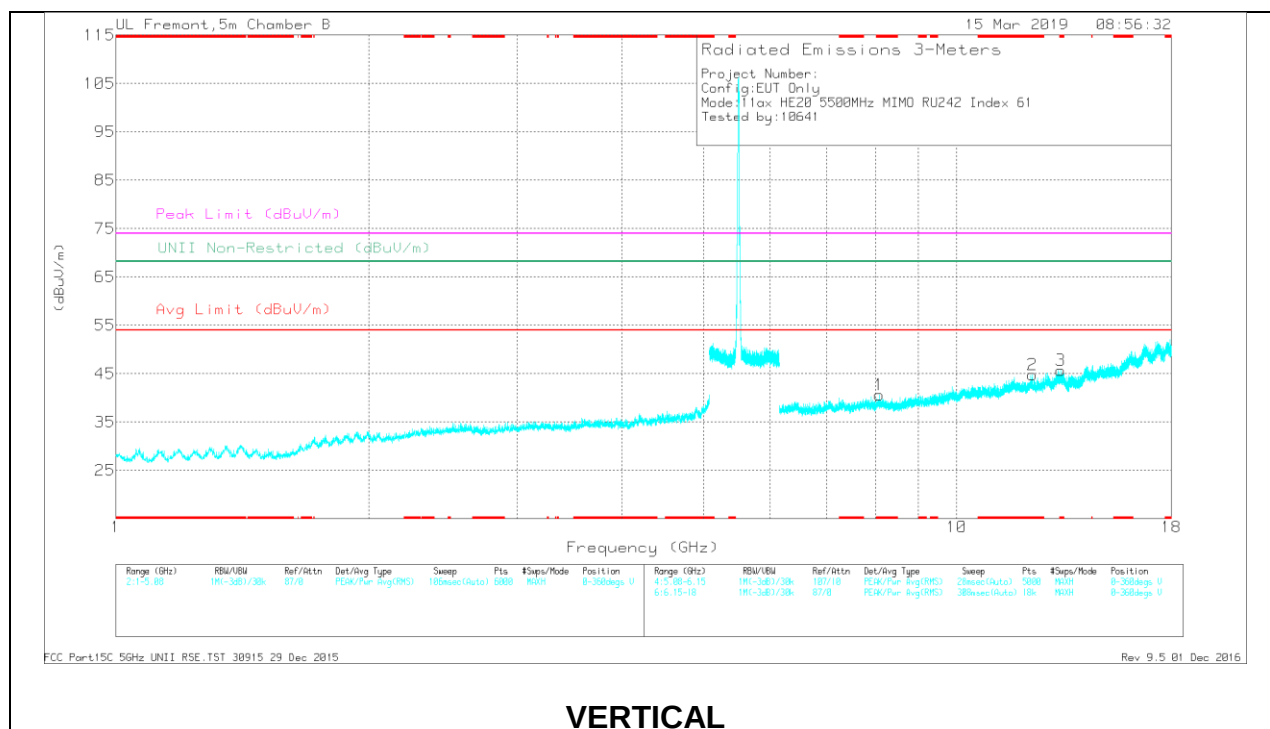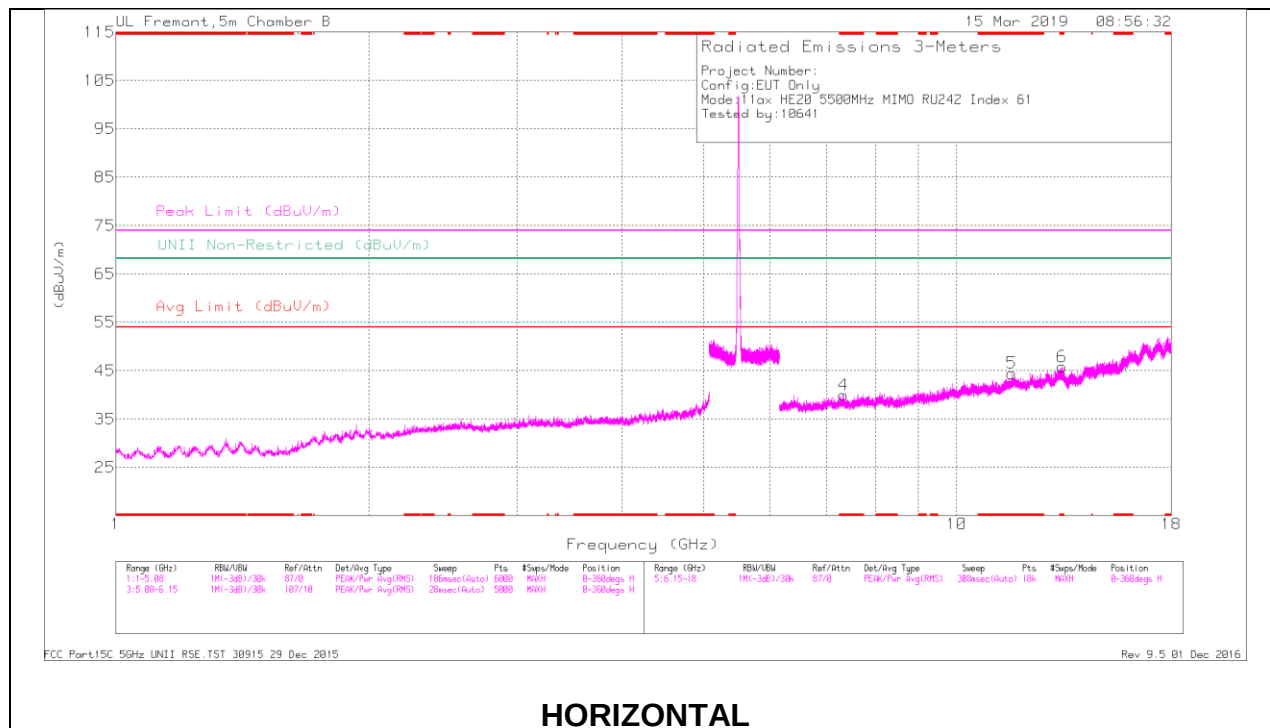HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.336	35.45	PK-U	36	-24.3	47.15	-	-	74	-26.85	325	157	H
	* 7.334	23.08	ADR	36	-24.3	34.78	54	-19.22	-	-	325	157	H
5	* 11.622	32.53	PK-U	38.7	-20.5	50.73	-	-	74	-23.27	273	188	H
	* 11.622	19.84	ADR	38.7	-20.5	38.04	54	-15.96	-	-	273	188	H
6	* 13.336	33.41	PK-U	40.6	-20.9	53.11	-	-	74	-20.89	239	208	H
	* 13.334	19.93	ADR	40.6	-20.9	39.63	54	-14.37	-	-	239	208	H
1	* 8.09	35.95	PK-U	36.5	-24.9	47.55	-	-	74	-26.45	207	252	V
	* 8.09	23.34	ADR	36.5	-24.9	34.94	54	-19.06	-	-	207	252	V
2	* 12.298	33.1	PK-U	39.1	-20	52.2	-	-	74	-21.8	184	295	V
	* 12.297	19.84	ADR	39.1	-20	38.94	54	-15.06	-	-	184	295	V
3	* 13.288	32.92	PK-U	40.7	-20.8	52.82	-	-	74	-21.18	199	378	V
	* 13.287	19.91	ADR	40.7	-20.8	39.81	54	-14.19	-	-	199	378	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

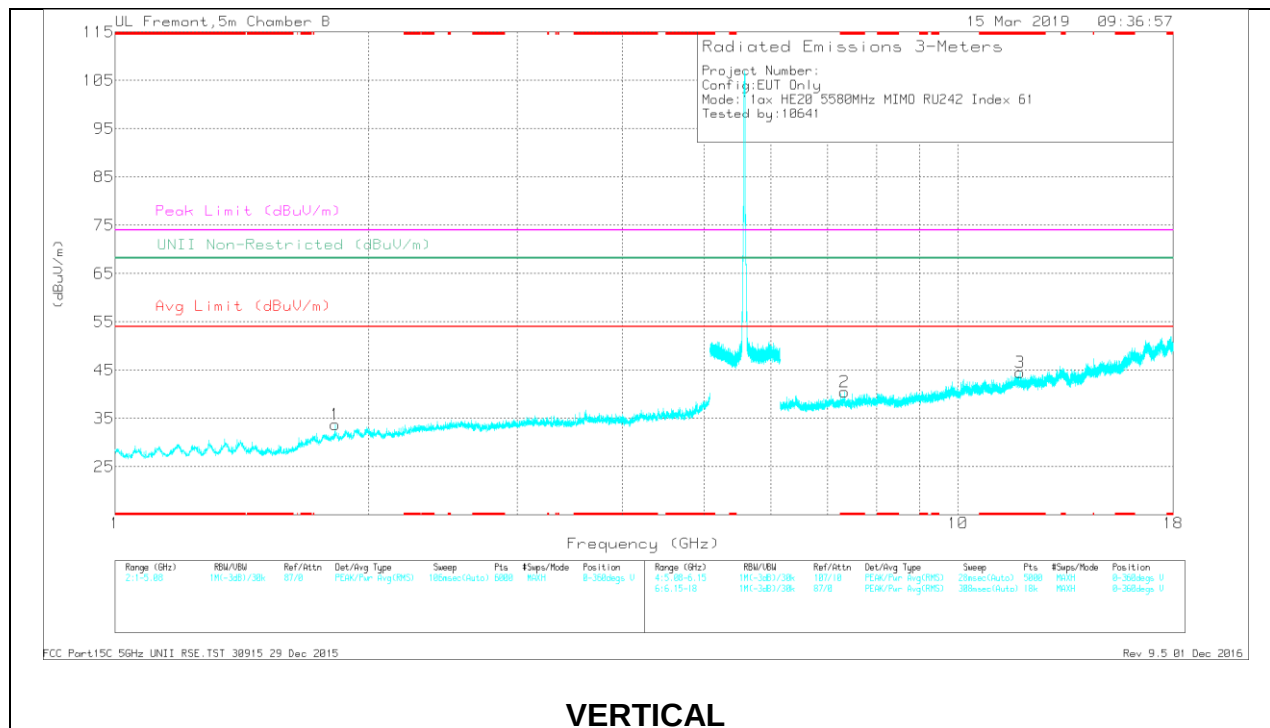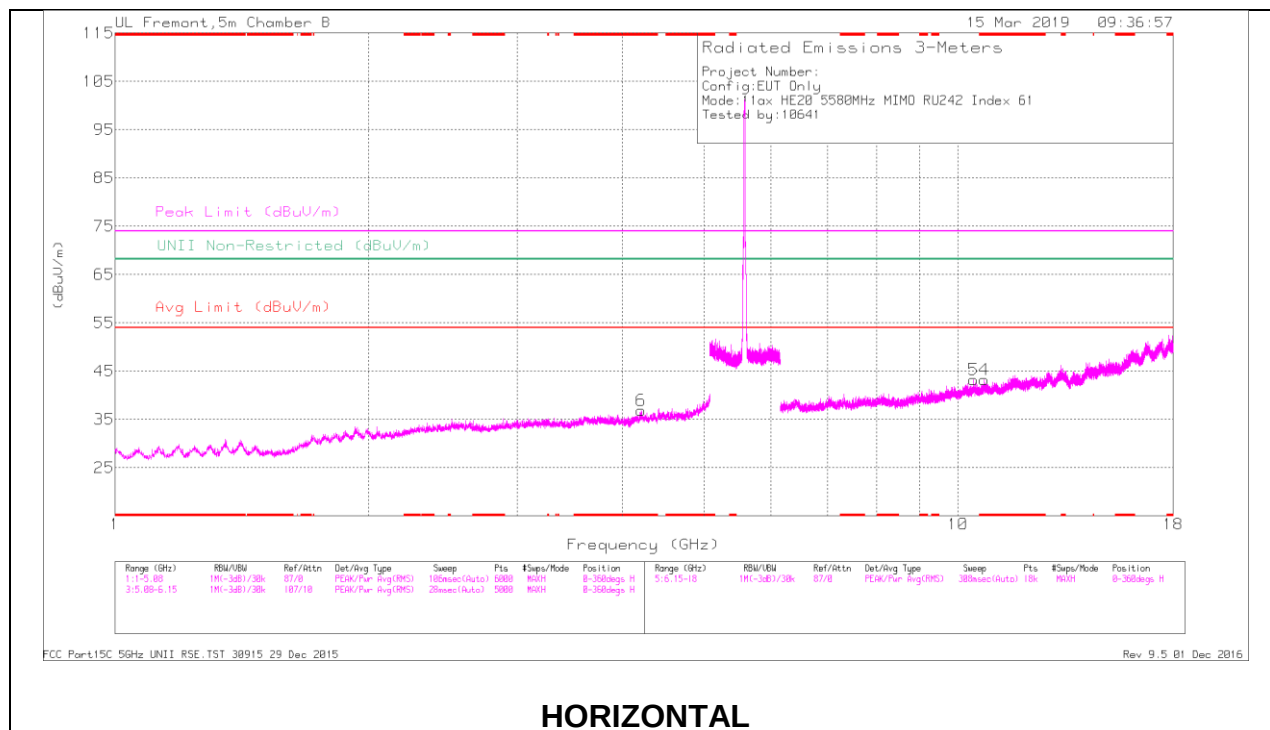

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 4.21	37.77	PK-U	33.6	-27.8	43.57	-	-	74	-30.43	-	-	29	329	H
	* 4.212	25.88	ADR	33.6	-27.8	31.68	54	-22.32	-	-	-	-	29	329	H
4	* 10.739	33.31	PK-U	37.9	-21	50.21	-	-	74	-23.79	-	-	86	251	H
	* 10.738	20.25	ADR	37.9	-21.1	37.05	54	-16.95	-	-	-	-	86	251	H
2	* 7.329	35.59	PK-U	36	-24.3	47.29	-	-	74	-26.71	-	-	116	249	V
	* 7.329	23.11	ADR	36	-24.3	34.81	54	-19.19	-	-	-	-	116	249	V
3	* 11.841	33.52	PK-U	39	-21	51.52	-	-	74	-22.48	-	-	136	278	V
	* 11.839	19.83	ADR	39.1	-21	37.93	54	-16.07	-	-	-	-	136	278	V
1	1.825	42.28	PK-U	30.8	-32.7	40.38	-	-	-	-	68.2	-27.82	52	289	V
5	10.427	33.26	PK-U	37.9	-21.5	49.66	-	-	-	-	68.2	-18.54	102	279	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

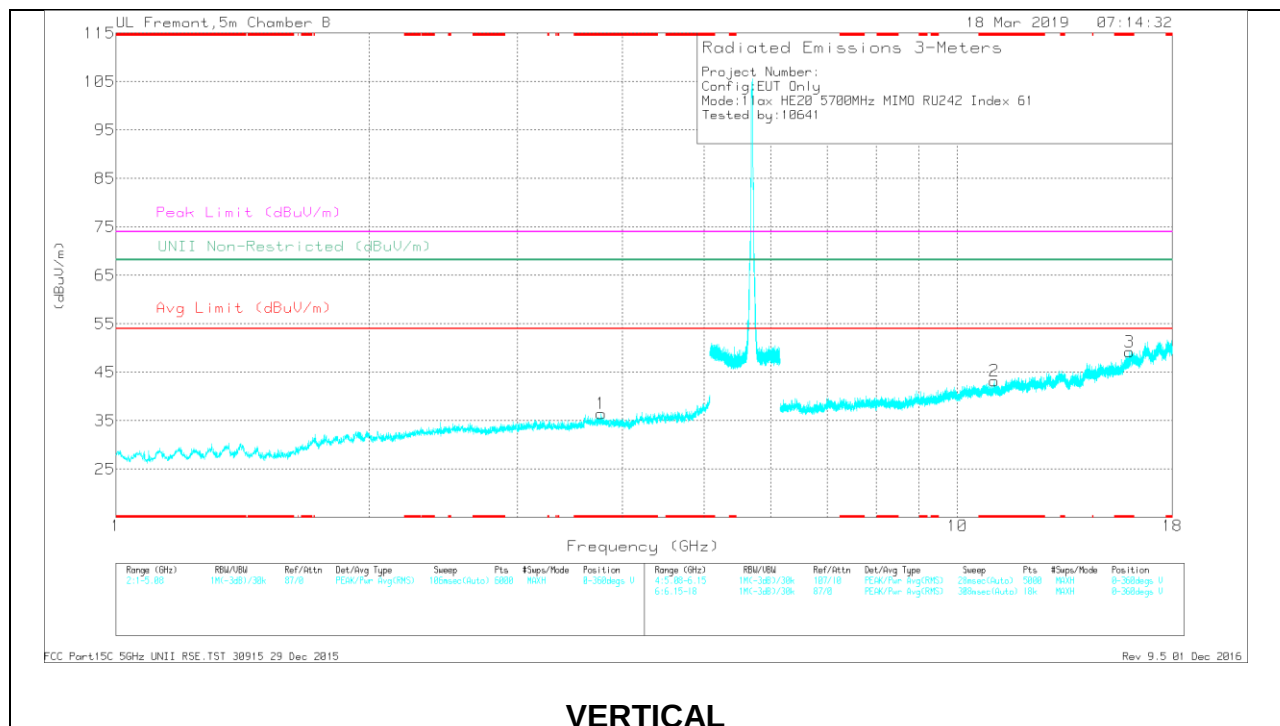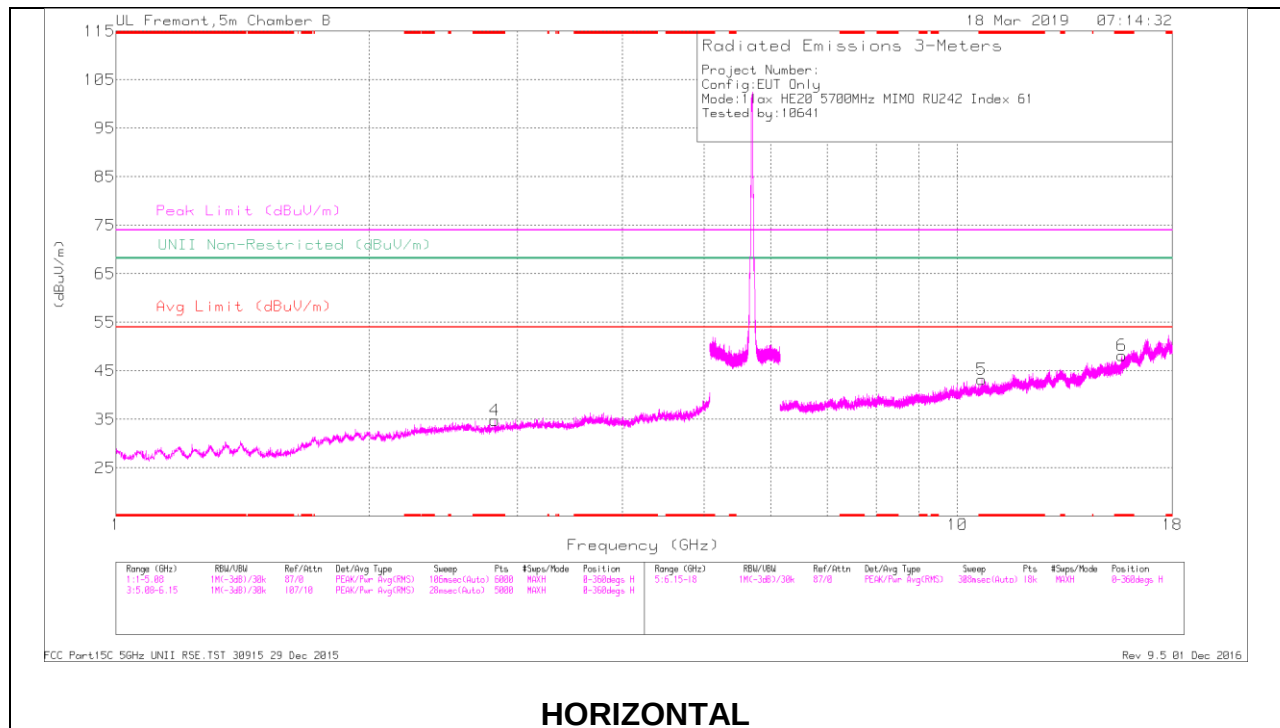

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.82	39.58	PK-U	32.5	-30.8	41.28	-	-	74	-32.72	33	137	H
	* 2.818	27.79	ADR	32.5	-30.8	29.49	54	-24.51	-	-	33	137	H
1	* 3.775	39.46	PK-U	33.4	-29.4	43.46	-	-	74	-30.54	58	161	V
	* 3.774	27.11	ADR	33.4	-29.5	31.01	54	-22.99	-	-	58	161	V
5	* 10.68	33.86	PK-U	37.8	-21.4	50.26	-	-	74	-23.74	111	180	H
	* 10.681	20.6	ADR	37.8	-21.4	37	54	-17	-	-	111	180	H
6	* 15.669	32.3	PK-U	41.2	-18.8	54.7	-	-	74	-19.3	130	207	H
	* 15.67	18.73	ADR	41.2	-18.8	41.13	54	-12.87	-	-	130	207	H
2	* 11.059	33.41	PK-U	37.9	-20.7	50.61	-	-	74	-23.39	170	176	V
	* 11.06	19.99	ADR	37.9	-20.7	37.19	54	-16.81	-	-	170	176	V
3	* 16.018	31.54	PK-U	42.6	-17.9	56.24	-	-	74	-17.76	139	204	V
	* 16.017	17.95	ADR	42.6	-17.9	42.65	54	-11.35	-	-	139	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

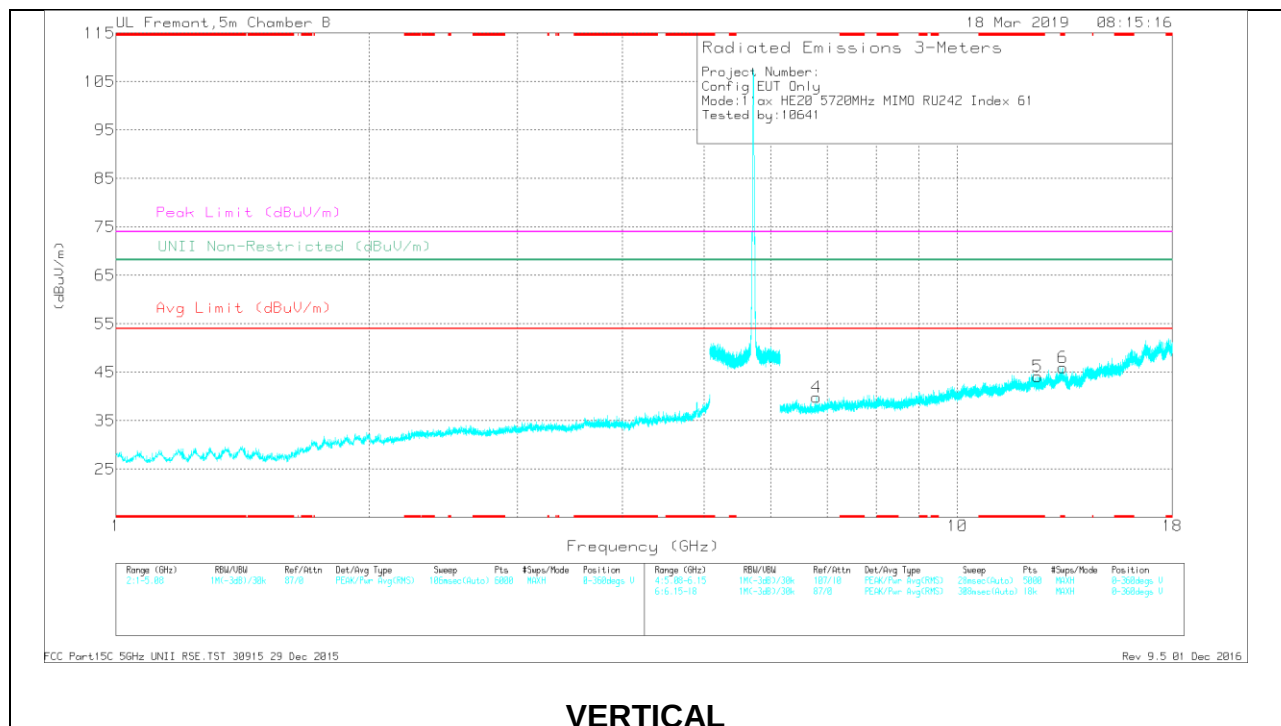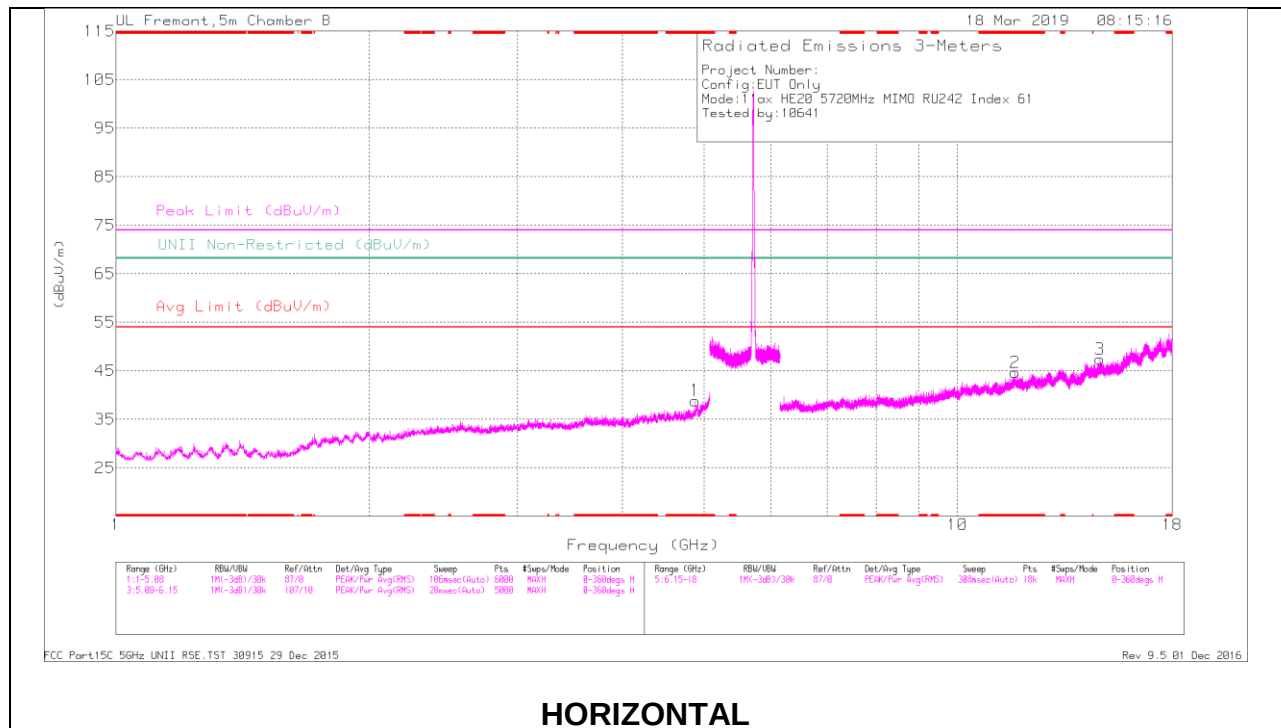


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.879	38.38	PK-U	34.3	-27.8	44.88	-	-	74	-29.12	-	-	28	219	H
	* 4.879	26.39	ADR	34.3	-27.8	32.89	54	-21.11	-	-	-	-	28	219	H
2	* 11.699	32.53	PK-U	39	-20.3	51.23	-	-	74	-22.77	-	-	35	253	H
	* 11.698	19.47	ADR	39	-20.3	38.17	54	-15.83	-	-	-	-	35	253	H
5	* 12.454	32.96	PK-U	39	-20.8	51.16	-	-	74	-22.84	-	-	135	272	V
	* 12.456	19.78	ADR	39	-20.8	37.98	54	-16.02	-	-	-	-	135	272	V
6	* 13.334	33.21	PK-U	40.6	-20.9	52.91	-	-	74	-21.09	-	-	128	295	V
	* 13.332	20.01	ADR	40.6	-20.9	39.71	54	-14.29	-	-	-	-	128	295	V
4	6.802	37.32	PK-U	35.9	-26.9	46.32	-	-	-	-	68.2	-21.88	126	251	V
3	14.771	32.94	PK-U	40.9	-20	53.84	-	-	-	-	68.2	-14.36	28	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

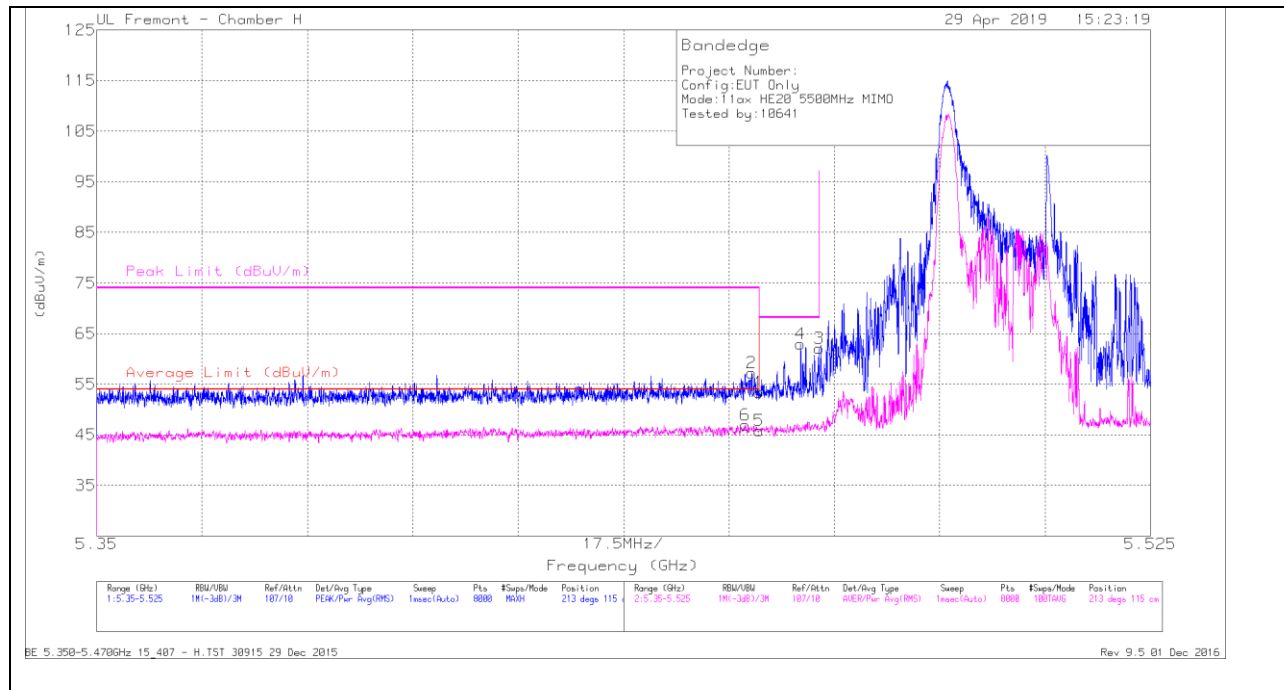BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF-T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.24	Pk	34.6	-20.4	53.44	-	-	74	-20.56	213	115	H
2	* 5.459	43.01	Pk	34.6	-20.4	57.21	-	-	74	-16.79	213	115	H
5	* 5.46	31.61	RMS	34.6	-20.4	45.81	54	-8.19	-	-	213	115	H
6	* 5.458	32.76	RMS	34.6	-20.4	46.96	54	-7.04	-	-	213	115	H
4	5.467	48.9	Pk	34.5	-20.5	62.9	-	-	68.2	-5.3	213	115	H
3	5.47	48.08	Pk	34.5	-20.5	62.08	-	-	68.2	-6.12	213	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

VERTICAL RESULT

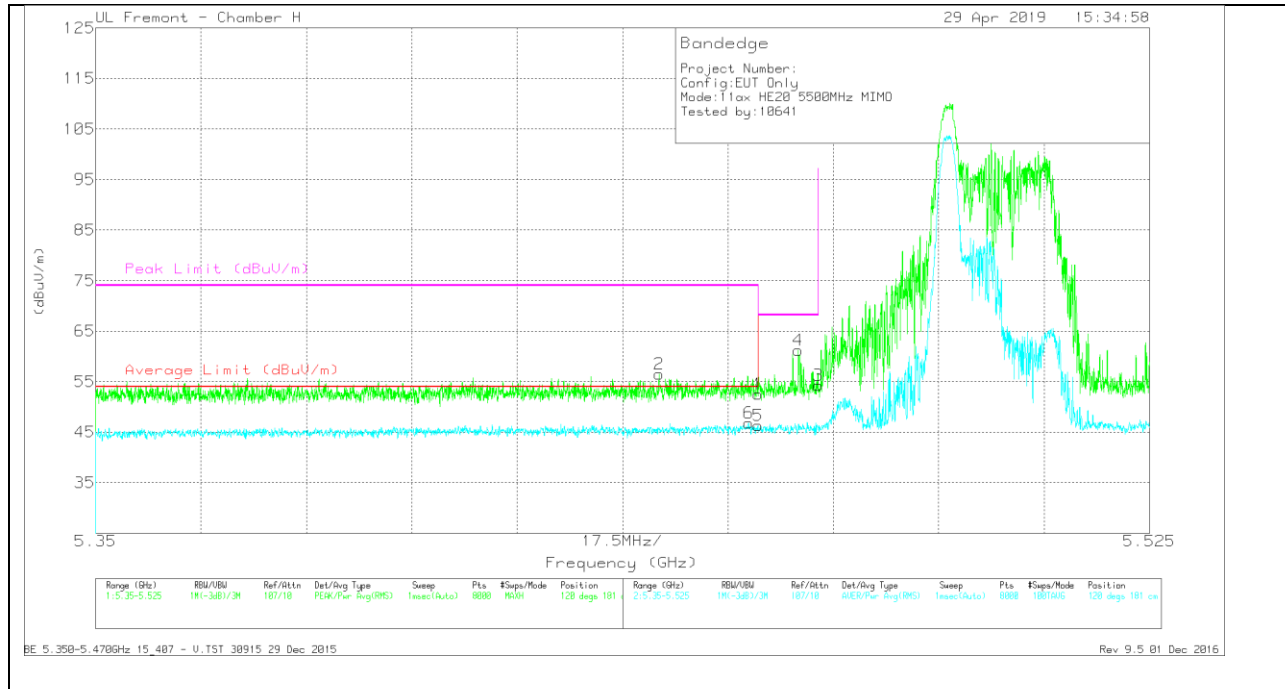

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.29	PK	34.6	-20.4	52.49	-	-	74	-21.51	120	181	V
2	* 5.444	42.25	PK	34.6	-20.4	56.45	-	-	74	-17.55	120	181	V
5	* 5.46	32.14	RMS	34.6	-20.4	46.34	54	-7.66	-	-	120	181	V
6	* 5.458	32.65	RMS	34.6	-20.4	46.85	54	-7.15	-	-	120	181	V
4	5.467	47.17	PK	34.5	-20.5	61.17	-	-	68.2	-7.03	120	181	V
3	5.47	40.31	PK	34.5	-20.5	54.31	-	-	68.2	-13.89	120	181	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

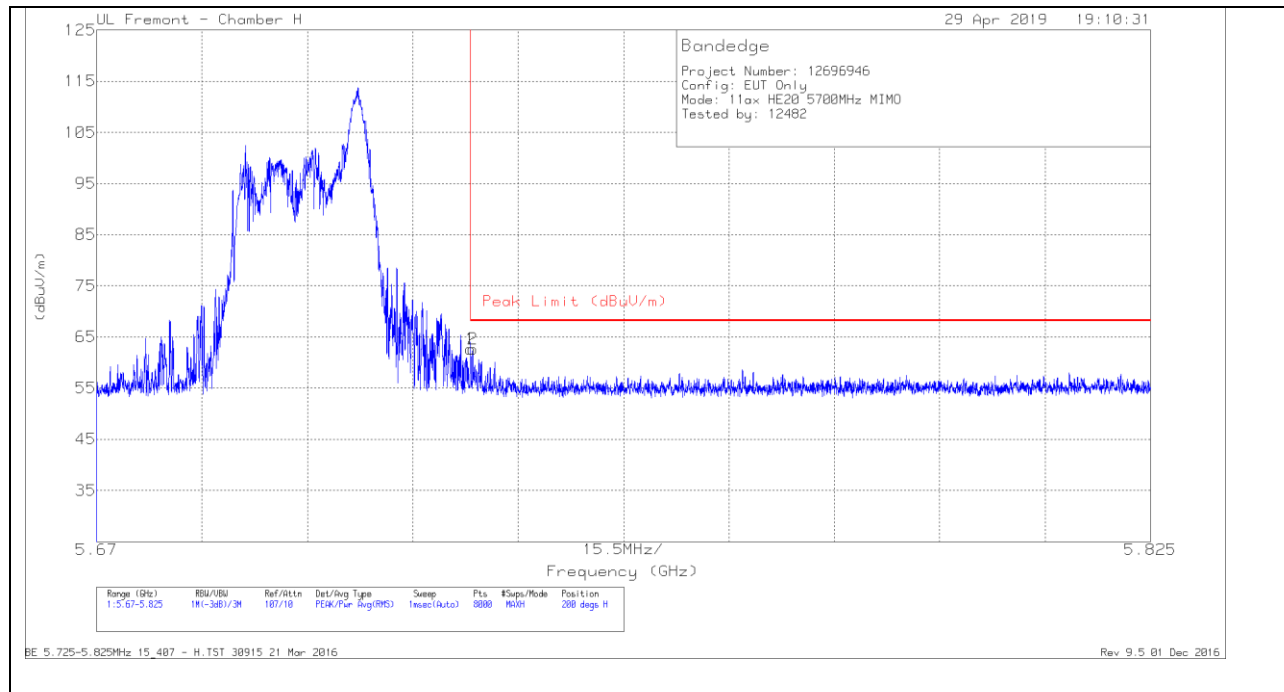BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	48.3	Pk	35.1	-20.7	62.7	68.2	-5.5	200	101	H
2	5.725	48.22	Pk	35.1	-20.7	62.62	68.2	-5.58	200	101	H



Pk - Peak detector

VERTICAL RESULT

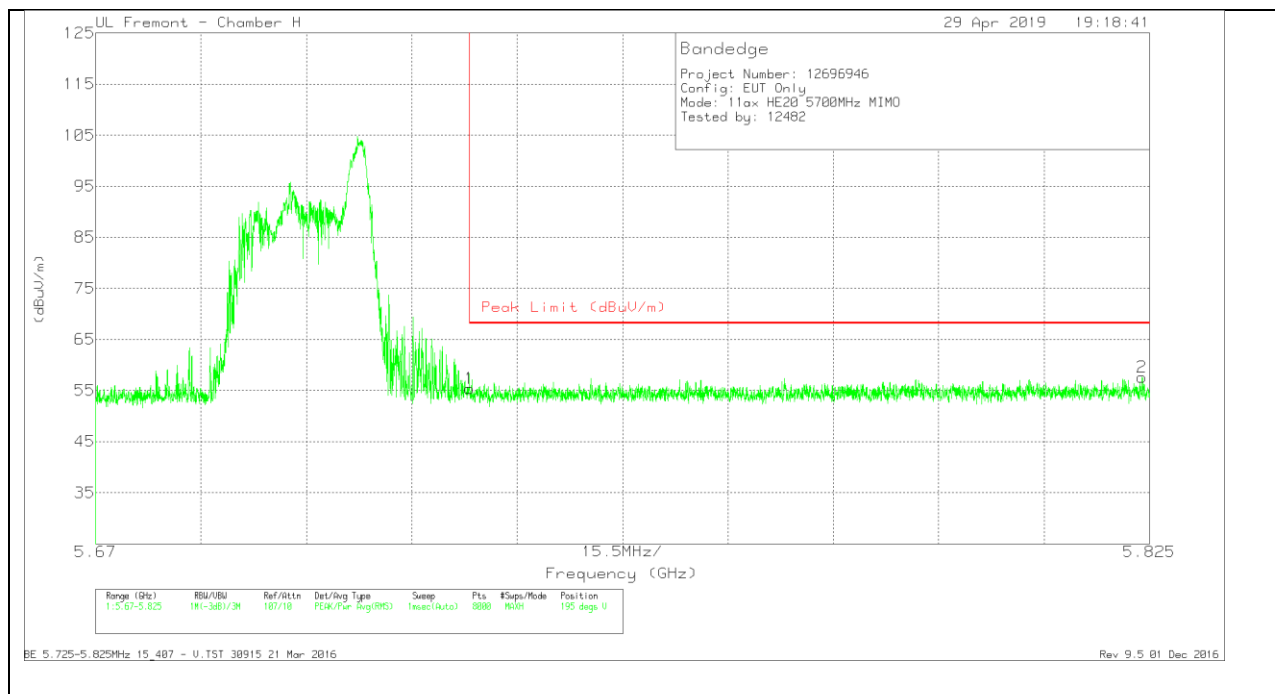

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.05	Pk	35.1	-20.7	55.45	68.2	-12.75	195	369	V
2	5.824	42.63	Pk	35.5	-20.5	57.63	68.2	-10.57	195	369	V

Pk - Peak detector

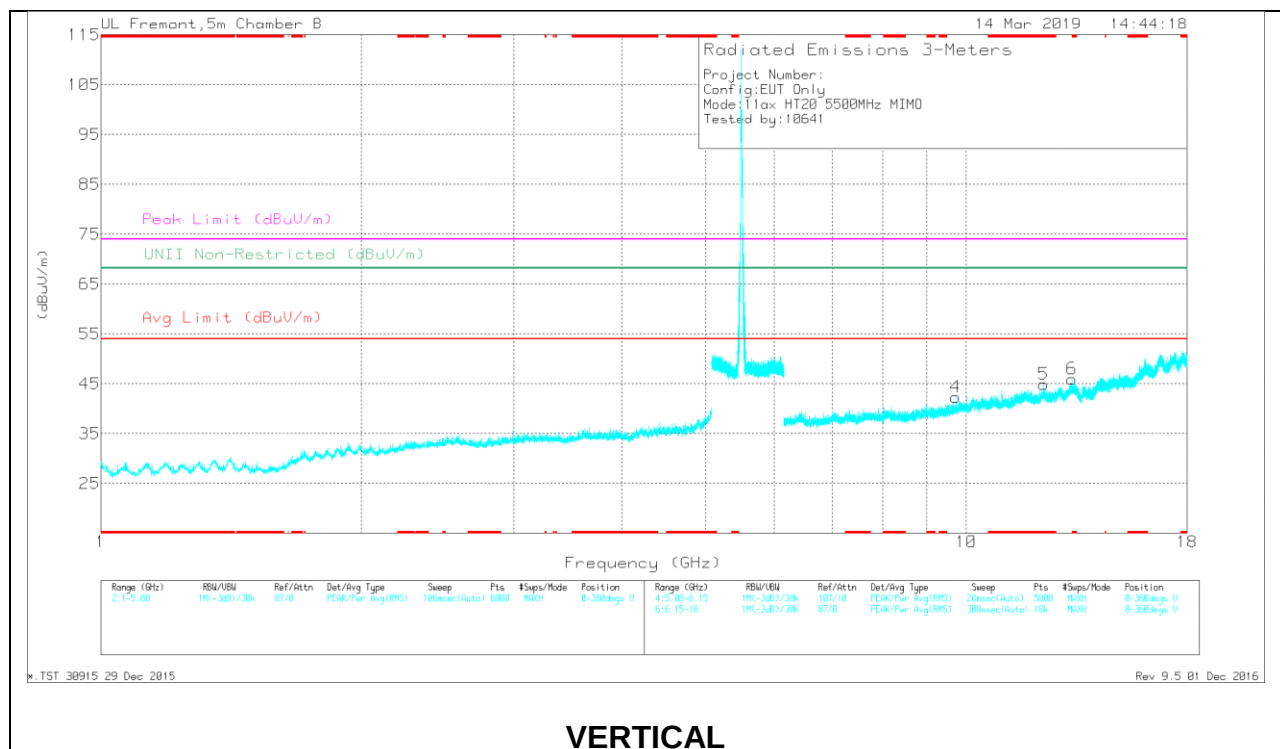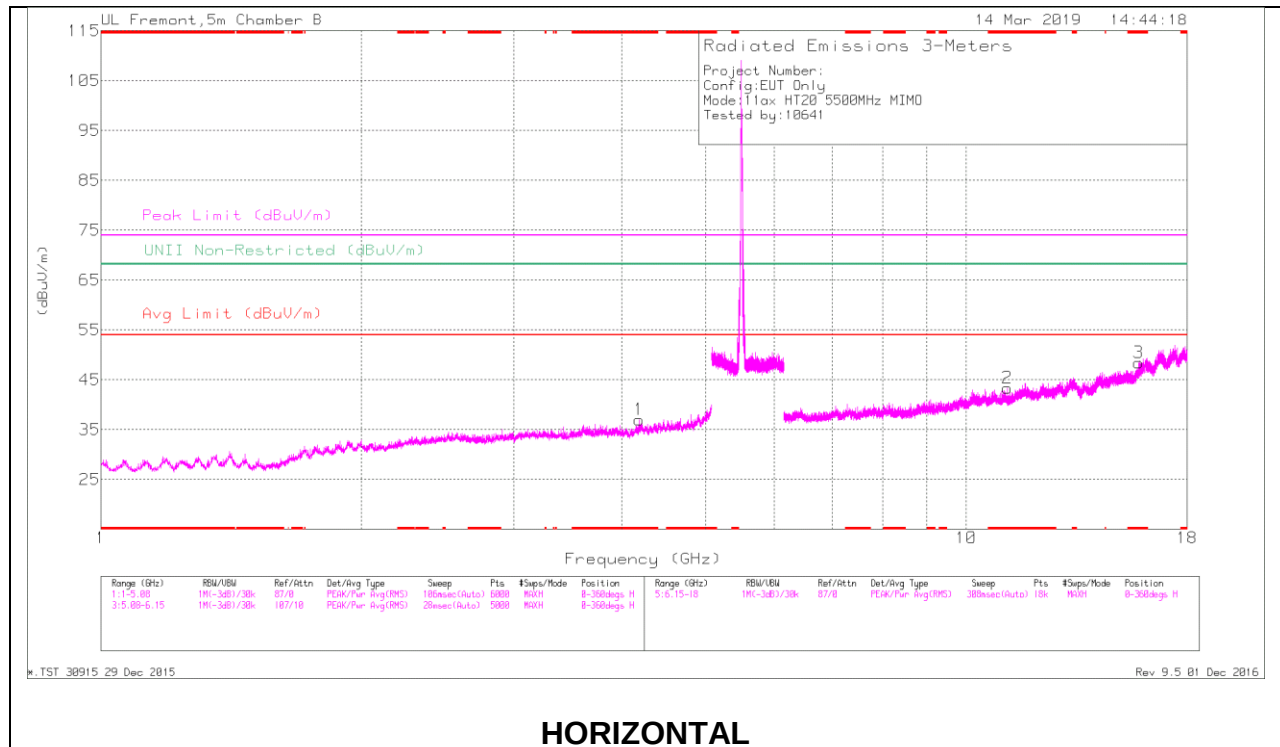HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.189	37.82	PK-U	33.6	-27.6	43.82	-	-	74	-30.18	-	-	304	167	H
	* 4.191	25.67	ADR	33.6	-27.6	31.67	54	-22.33	-	-	-	-	304	167	H
2	* 11.154	33.31	PK-U	37.9	-21.3	49.91	-	-	74	-24.09	-	-	282	184	H
	* 11.151	20.09	ADR	37.9	-21.3	36.69	54	-17.31	-	-	-	-	282	184	H
3	* 15.805	32.25	PK-U	42.2	-18.7	55.75	-	-	74	-18.25	-	-	248	240	H
	* 15.805	18.44	ADR	42.2	-18.7	41.94	54	-12.06	-	-	-	-	248	240	H
5	* 12.284	33.27	PK-U	39.1	-20	52.37	-	-	74	-21.63	-	-	229	181	V
	* 12.286	19.66	ADR	39.1	-20	38.76	54	-15.24	-	-	-	-	229	181	V
6	* 13.256	32.98	PK-U	40.6	-20.8	52.78	-	-	74	-21.22	-	-	222	165	V
	* 13.256	19.78	ADR	40.6	-20.8	39.58	54	-14.42	-	-	-	-	222	165	V
4	9.717	33.82	PK-U	37.2	-22.6	48.42	-	-	-	-	68.2	-19.78	257	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

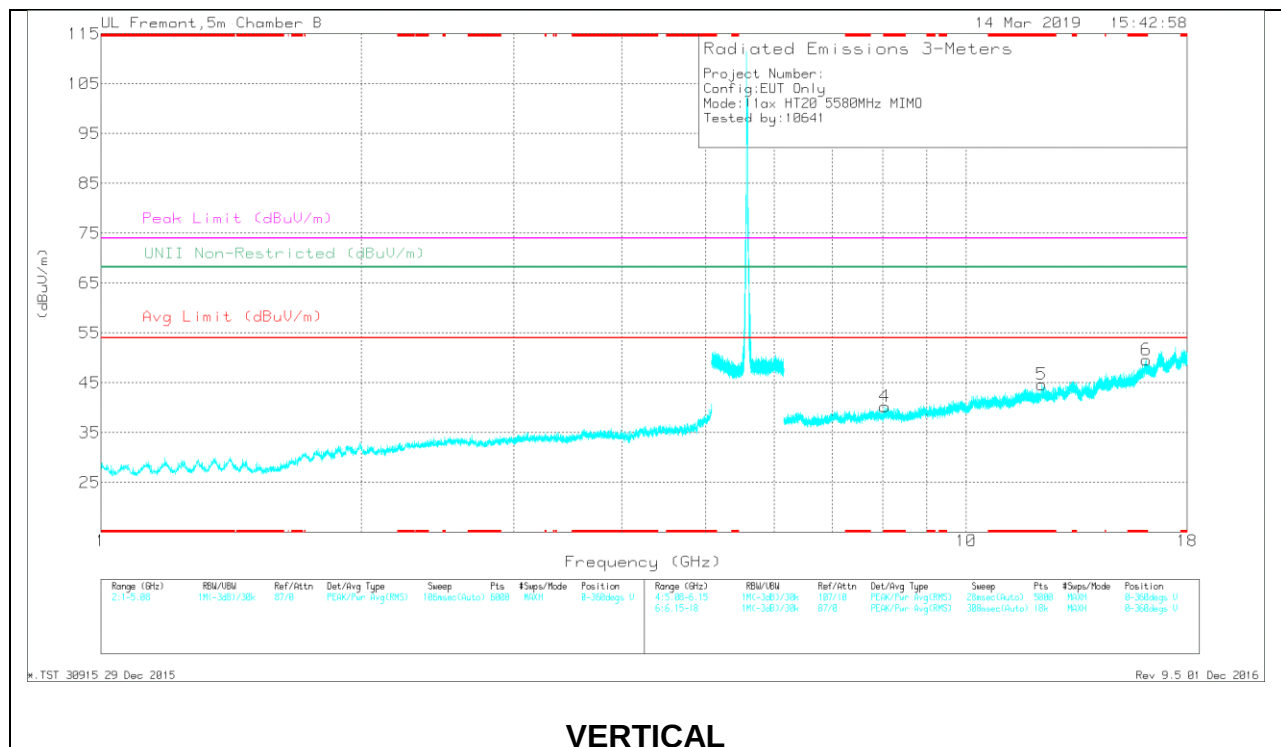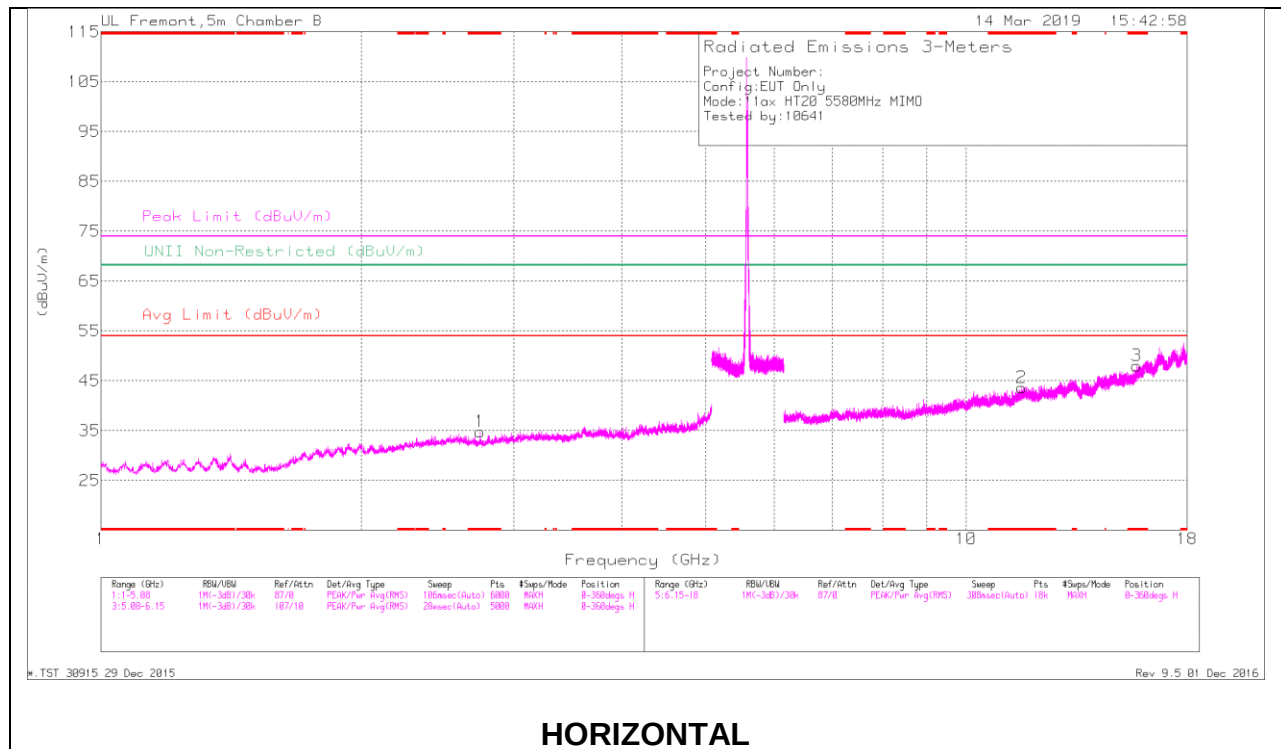

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.745	39.56	PK-U	32.3	-31	40.86	-	-	74	-33.14	331	219	H
	* 2.745	27.95	ADR	32.3	-31	29.25	54	-24.75	-	-	331	219	H
2	* 11.582	33.07	PK-U	38.6	-21	50.67	-	-	74	-23.33	311	241	H
	* 11.581	20.04	ADR	38.6	-21	37.64	54	-16.36	-	-	311	241	H
3	* 15.746	32.45	PK-U	41.8	-18.8	55.45	-	-	74	-18.55	299	233	H
	* 15.746	18.39	ADR	41.8	-18.8	41.39	54	-12.61	-	-	299	233	H
4	* 8.054	34.83	PK-U	36.4	-24.7	46.53	-	-	74	-27.47	275	287	V
	* 8.053	22.81	ADR	36.4	-24.7	34.51	54	-19.49	-	-	275	287	V
5	* 12.218	32.71	PK-U	39.2	-20.1	51.81	-	-	74	-22.19	250	311	V
	* 12.22	19.62	ADR	39.2	-20.1	38.72	54	-15.28	-	-	250	311	V
6	* 16.147	32.42	PK-U	43	-18.5	56.92	-	-	74	-17.08	209	301	V
	* 16.147	18.71	ADR	43	-18.5	43.21	54	-10.79	-	-	209	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

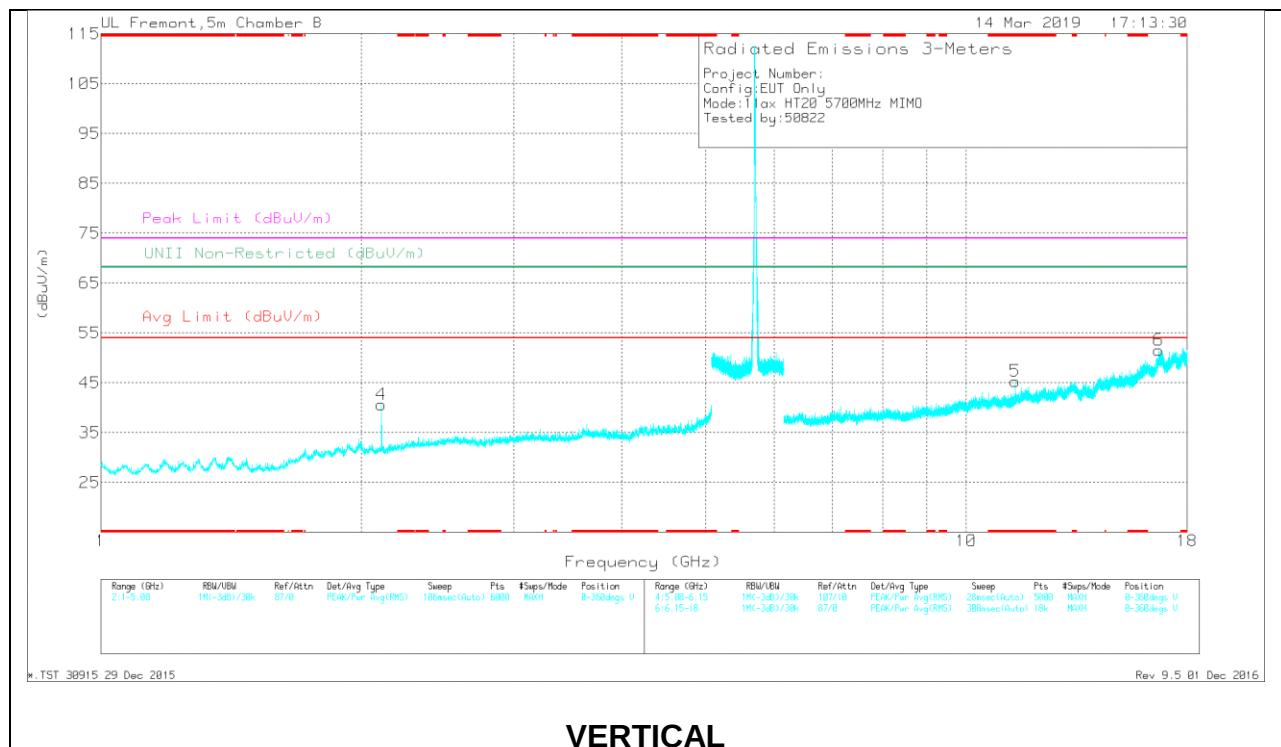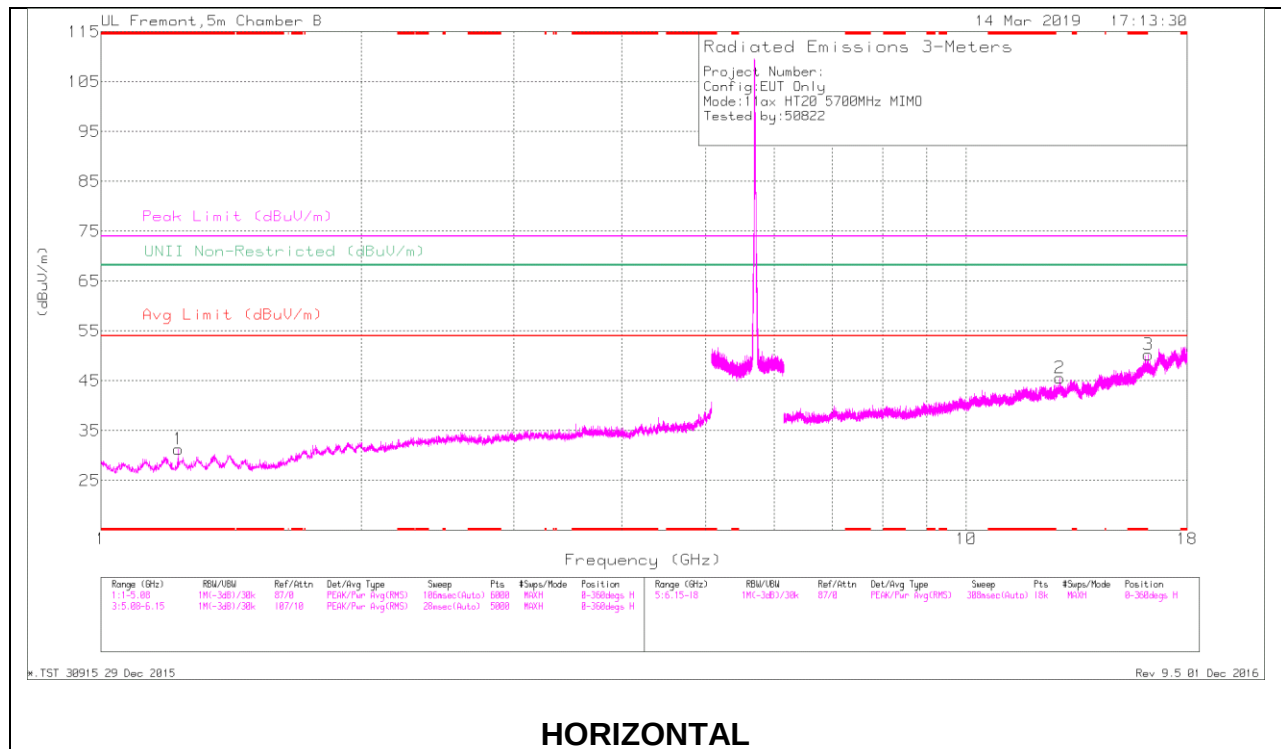

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Ampl/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.229	41.3	PK-U	28.3	-33.4	36.2	-	-	74	-37.8	-	-	241	272	H
	* 1.23	29.3	ADR	28.3	-33.4	24.2	54	-29.8	-	-	-	-	241	272	H
5	* 11.384	34.55	PK-U	38.4	-20.8	52.15	-	-	74	-21.85	-	-	87	132	V
	* 11.384	21.16	ADR	38.4	-20.8	38.76	54	-15.24	-	-	-	-	87	132	V
4	2.11	40.64	PK-U	31.1	-32.1	39.64	-	-	-	-	68.2	-28.56	311	121	V
2	12.82	32.36	PK-U	39.3	-19.8	51.86	-	-	-	-	68.2	-16.34	226	212	H
3	16.222	32.1	PK-U	43	-18.6	56.5	-	-	-	-	68.2	-11.7	137	244	H
6	16.695	31.77	PK-U	44.3	-17.5	58.57	-	-	-	-	68.2	-9.63	352	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANEL 144 RESULTS

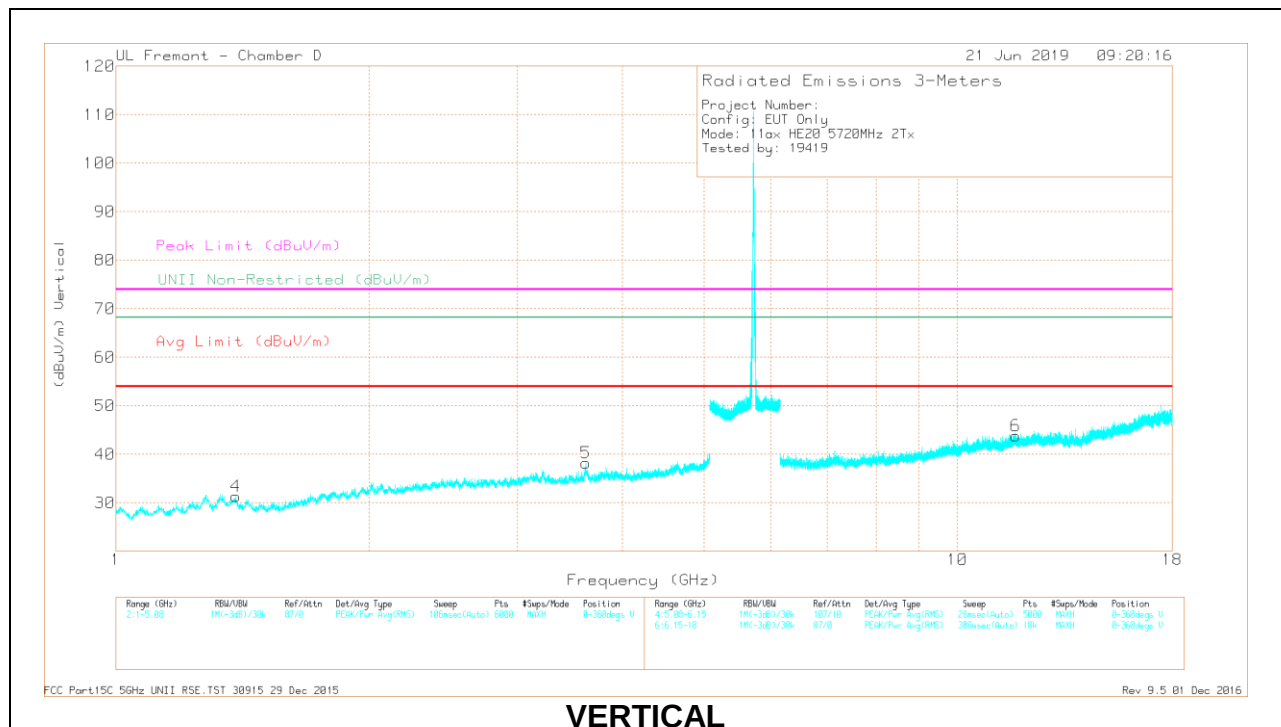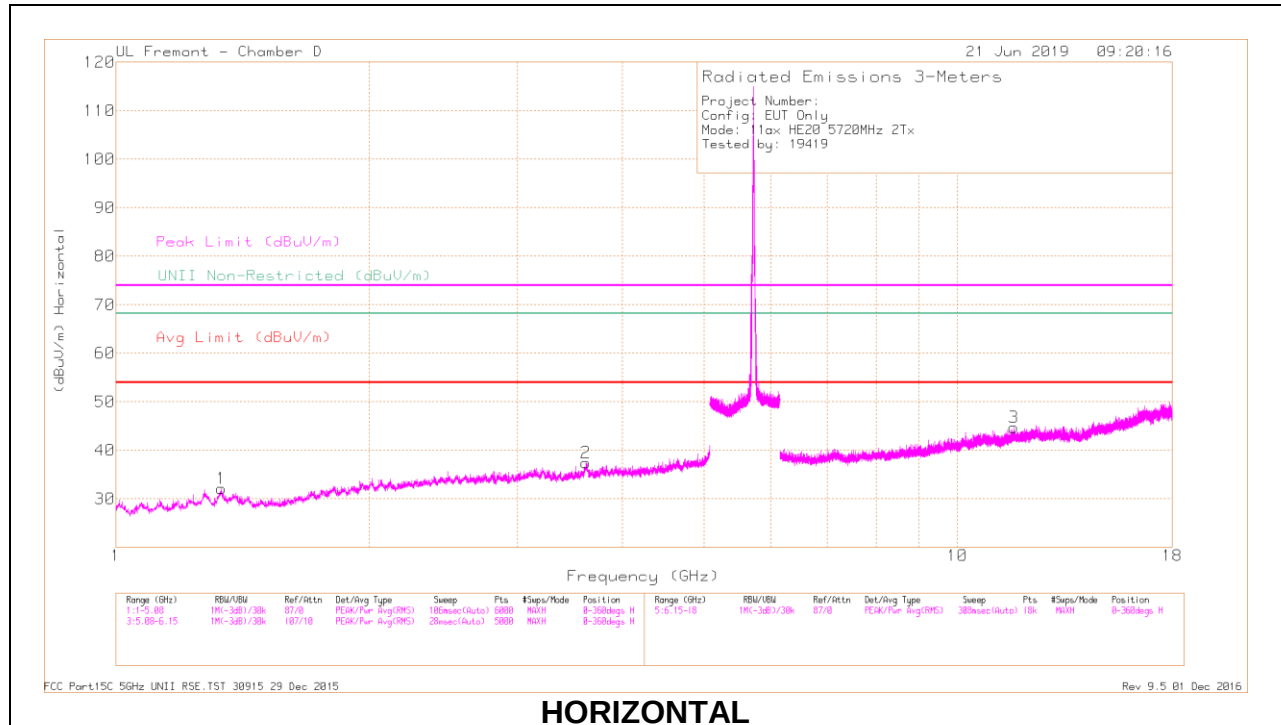


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 1.334	41.24	PK-U	29.2	-31.2	39.24	-	-	74	-34.76	-	-	340	129	H
	* 1.334	29.41	ADR	29.1	-31.2	27.31	54	-26.69	-	-	-	-	340	129	H
2	* 3.617	39.2	PK-U	33.6	-28.8	44	-	-	74	-30	-	-	316	162	H
	* 3.619	27.32	ADR	33.5	-28.8	32.02	54	-21.98	-	-	-	-	316	162	H
4	* 1.387	40.75	PK-U	28.8	-31.1	38.45	-	-	74	-35.55	-	-	270	102	V
	* 1.387	29.23	ADR	28.8	-31.1	26.93	54	-27.07	-	-	-	-	270	102	V
5	* 3.614	39.57	PK-U	33.5	-28.9	44.17	-	-	74	-29.83	-	-	240	170	V
	* 3.617	27.14	ADR	33.6	-28.8	31.94	54	-22.06	-	-	-	-	240	170	V
3	* 11.67	34.56	PK-U	38.3	-21	51.86	-	-	74	-22.14	-	-	250	220	H
	* 11.671	21.55	ADR	38.3	-21	38.85	54	-15.15	-	-	-	-	250	220	H
6	* 11.731	34.73	PK-U	38.4	-21.6	51.53	-	-	74	-22.47	-	-	204	170	V
	* 11.73	21.66	ADR	38.4	-21.6	38.46	54	-15.54	-	-	-	-	204	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

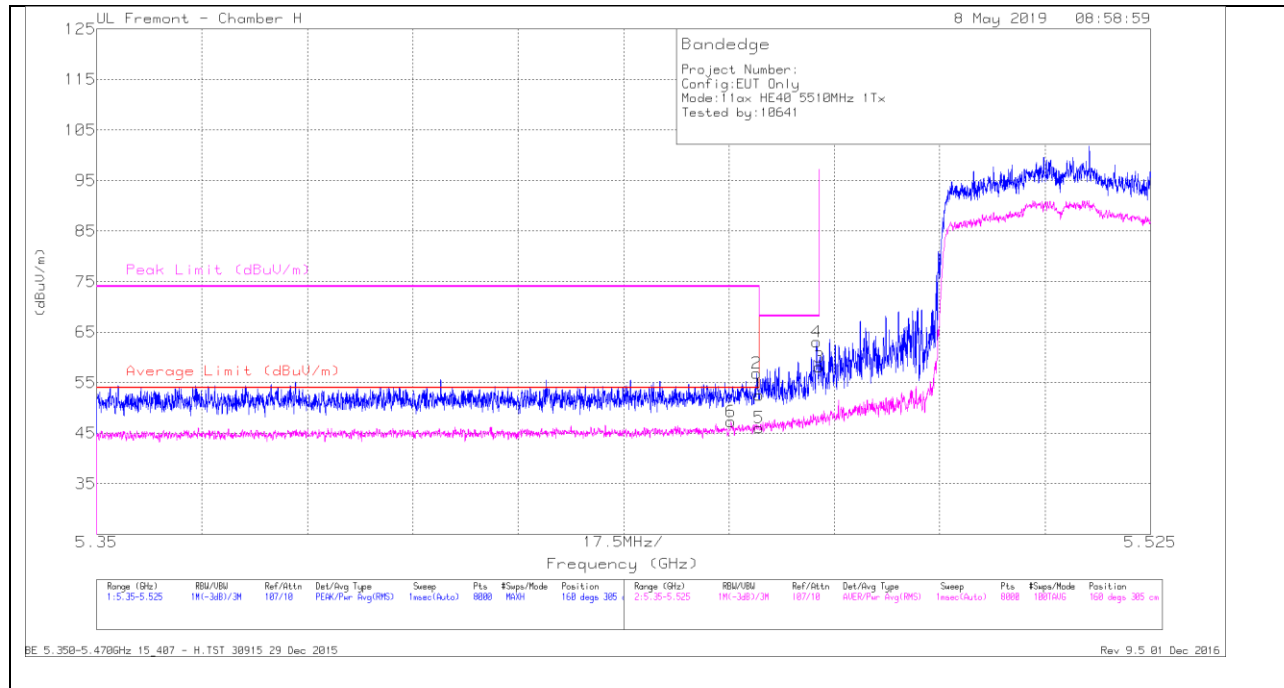1.1.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND**1TX Antenna 4 MODE – 484 Tones, RU Index 65****BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.31	Pk	34.6	-20.4	52.51	-	-	74	-21.49	160	305	H
2	* 5.46	42.65	Pk	34.6	-20.4	56.85	-	-	74	-17.15	160	305	H
5	* 5.46	31.82	RMS	34.6	-20.4	46.02	54	-7.98	-	-	160	305	H
6	* 5.455	33.02	RMS	34.7	-20.4	47.32	54	-6.68	-	-	160	305	H
3	5.47	44.12	Pk	34.5	-20.5	58.12	-	-	68.2	-10.08	160	305	H
4	5.47	49.12	Pk	34.5	-20.5	63.12	-	-	68.2	-5.08	160	305	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

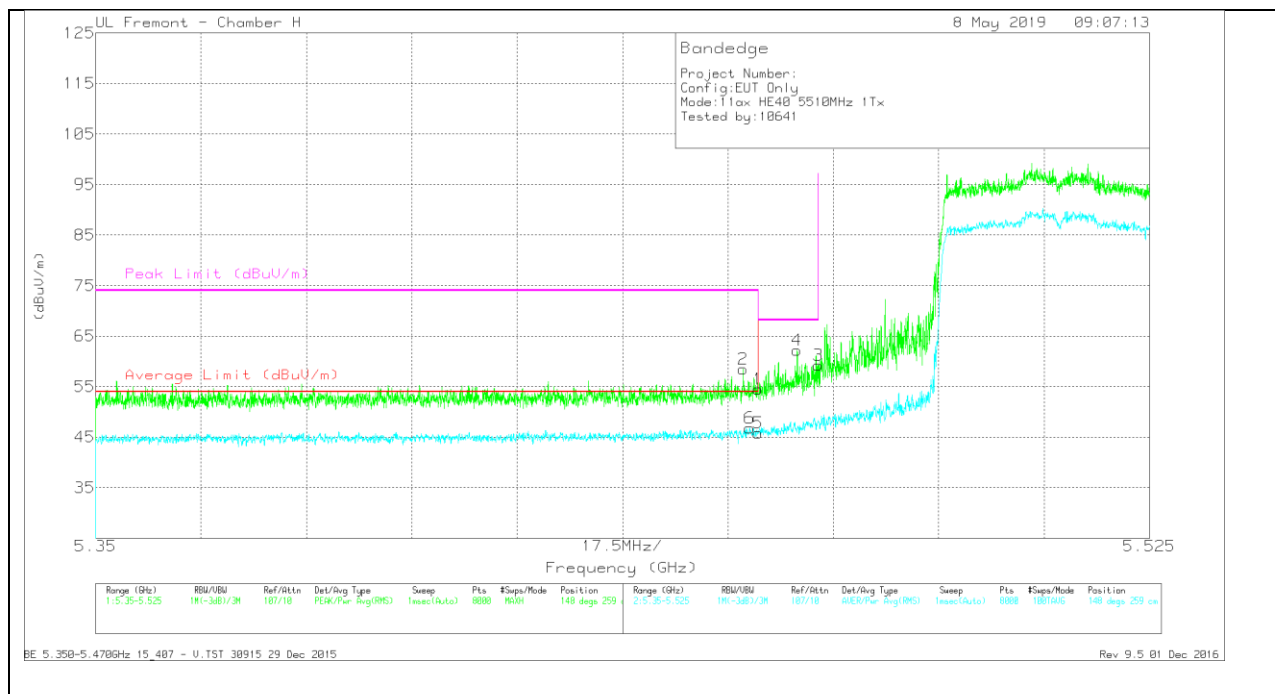


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 5.46	40.33	Pk	34.6	-20.4	54.53	-	-	74	-19.47	148	259	V
2	* 5.458	44.24	Pk	34.6	-20.4	58.44	-	-	74	-15.56	148	259	V
5	* 5.46	31.6	RMS	34.6	-20.4	45.8	54	-8.2	-	-	148	259	V
6	* 5.459	32.63	RMS	34.6	-20.4	46.83	54	-7.17	-	-	148	259	V
4	5.467	48.18	Pk	34.5	-20.5	62.18	-	-	68.2	-6.02	148	259	V
3	5.47	45.21	Pk	34.5	-20.5	59.21	-	-	68.2	-8.99	148	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

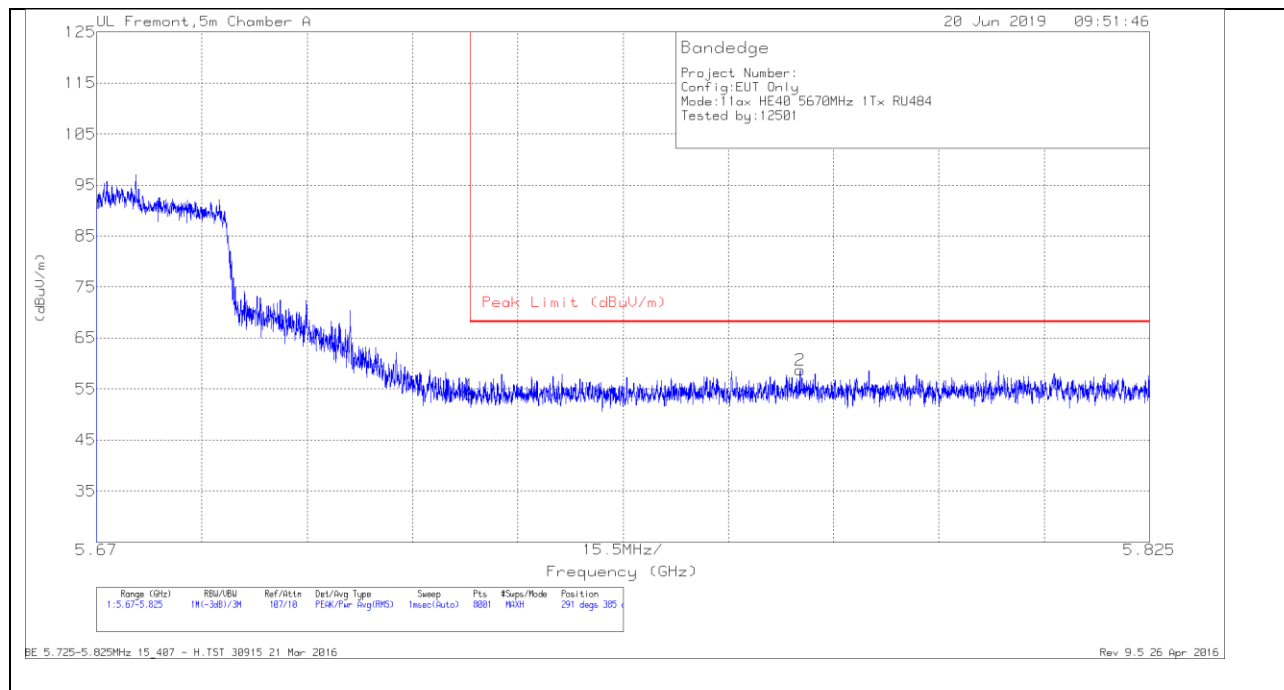BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.85	Pk	34.9	-18	53.75	68.2	-14.45	291	385	H
2	5.774	41.26	Pk	35.1	-17.6	58.76	68.2	-9.44	291	385	H


Pk - Peak detector

VERTICAL RESULT

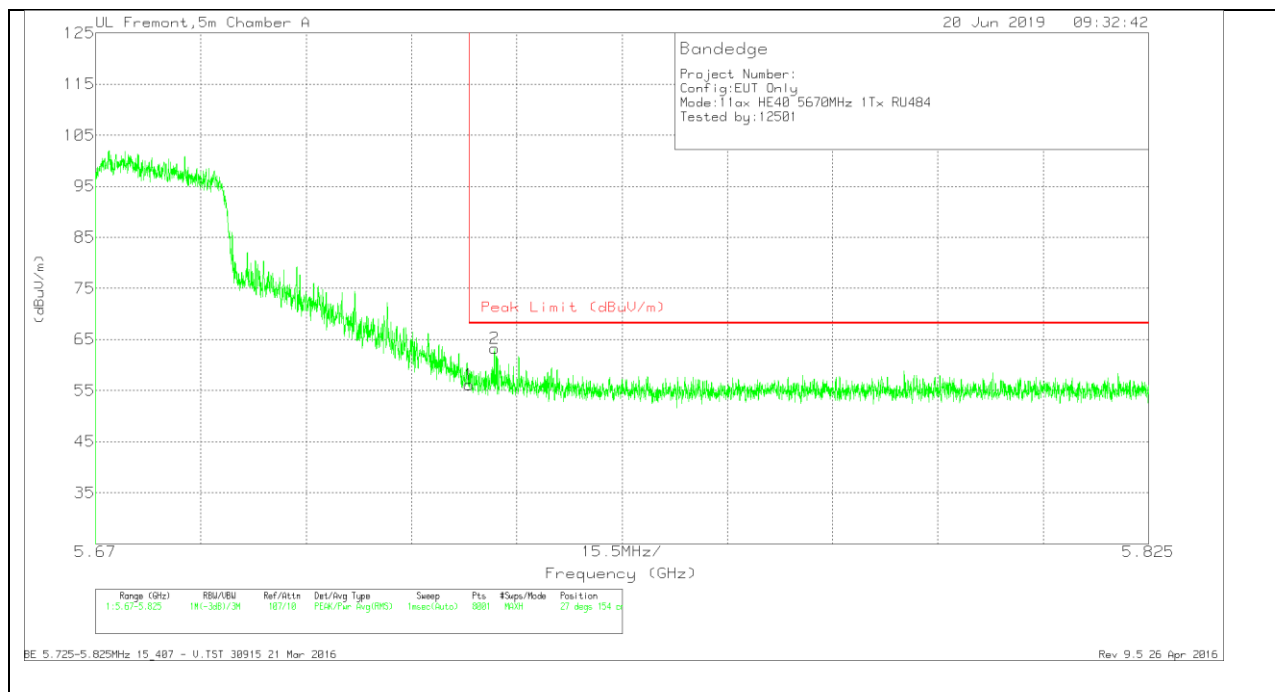

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.23	Pk	34.9	-18	56.13	68.2	-12.07	27	154	V
2	5.729	46.39	Pk	34.8	-17.9	63.29	68.2	-4.91	27	154	V

Pk - Peak detector

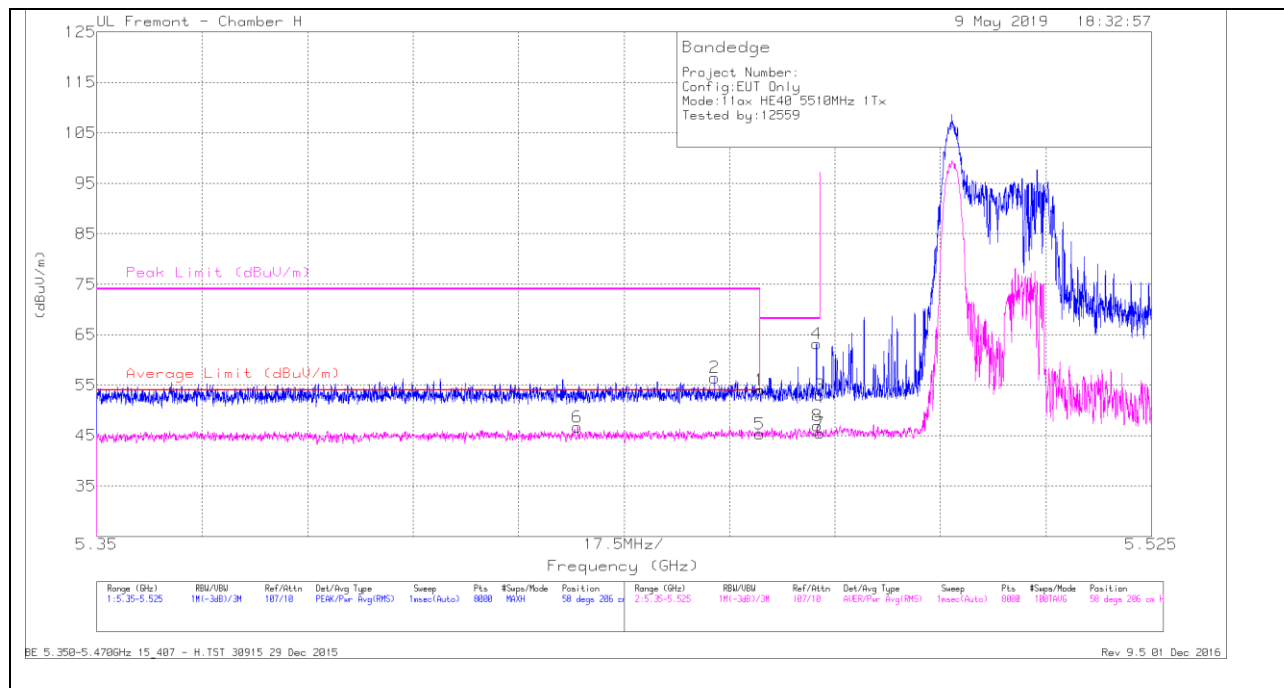1TX Antenna 4 MODE – 26 Tones, RU Index 0**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.86	Pk	34.6	-20.4	54.06	-	-	74	-19.94	58	206	H
2	* 5.453	42.24	Pk	34.6	-20.4	56.44	-	-	74	-17.56	58	206	H
5	* 5.46	31.15	RMS	34.6	-20.4	45.35	54	-8.65	-	-	58	206	H
6	* 5.43	32.51	RMS	34.6	-20.4	46.71	54	-7.29	-	-	58	206	H
4	5.469	49.15	Pk	34.5	-20.5	63.15	-	-	68.2	-5.05	58	206	H
3	5.47	39.05	Pk	34.5	-20.5	53.05	-	-	68.2	-15.15	58	206	H
7	5.47	31.42	RMS	34.5	-20.5	45.42	-	-	-	-	58	206	H
8	5.47	32.96	RMS	34.5	-20.5	46.96	-	-	-	-	58	206	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

VERTICAL RESULT

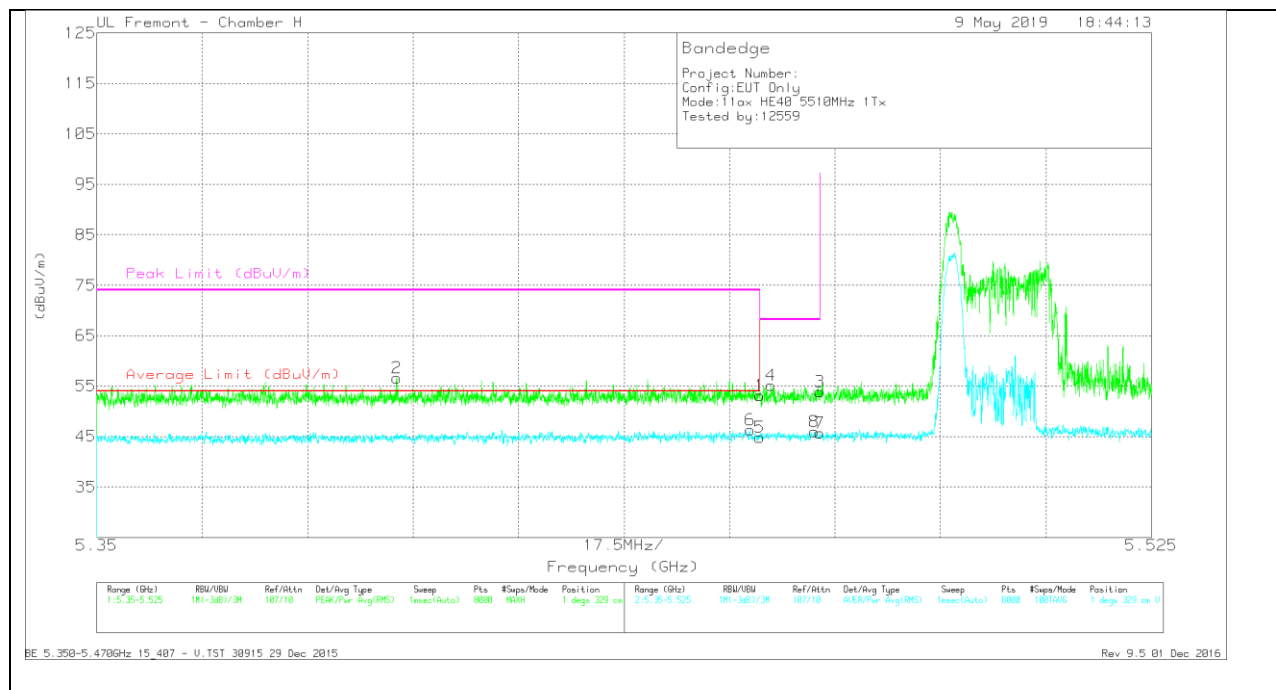

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.4	42.46	Pk	34.6	-20.4	56.66	-	-	74	-17.34	1	329	V
6	* 5.458	32.13	RMS	34.6	-20.4	46.33	54	-7.67	-	-	1	329	V
1	* 5.46	39	Pk	34.6	-20.4	53.2	-	-	74	-20.8	1	329	V
5	* 5.46	30.6	RMS	34.6	-20.4	44.8	54	-9.2	-	-	1	329	V
4	5.462	41.15	Pk	34.5	-20.5	55.15	-	-	68.2	-13.05	1	329	V
8	5.469	31.95	RMS	34.5	-20.5	45.95	-	-	-	-	1	329	V
3	5.47	39.93	Pk	34.5	-20.5	53.93	-	-	68.2	-14.27	1	329	V
7	5.47	31.67	RMS	34.5	-20.5	45.67	-	-	-	-	1	329	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

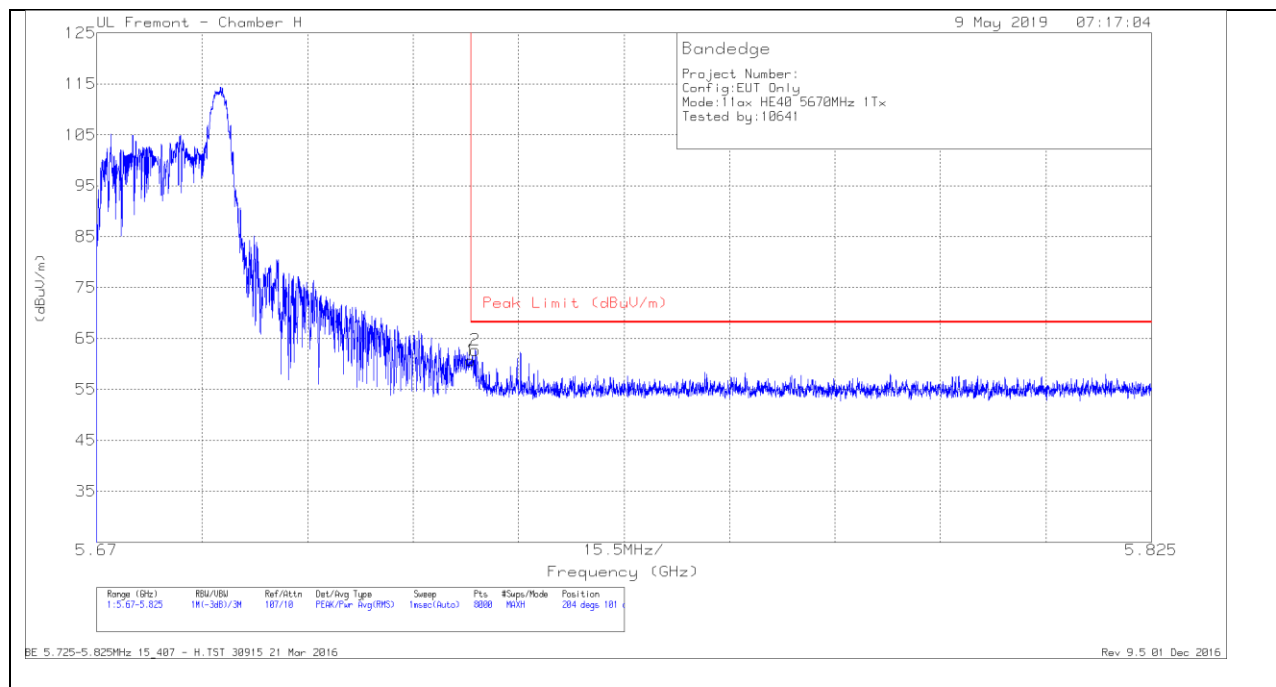1TX Antenna 4 MODE – 26 Tones, RU Index 17**BANDEGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.23	Pk	35.1	-20.7	60.63	68.2	-7.57	204	101	H
2	5.726	48.31	Pk	35.1	-20.7	62.71	68.2	-5.49	204	101	H


Pk - Peak detector

VERTICAL RESULT

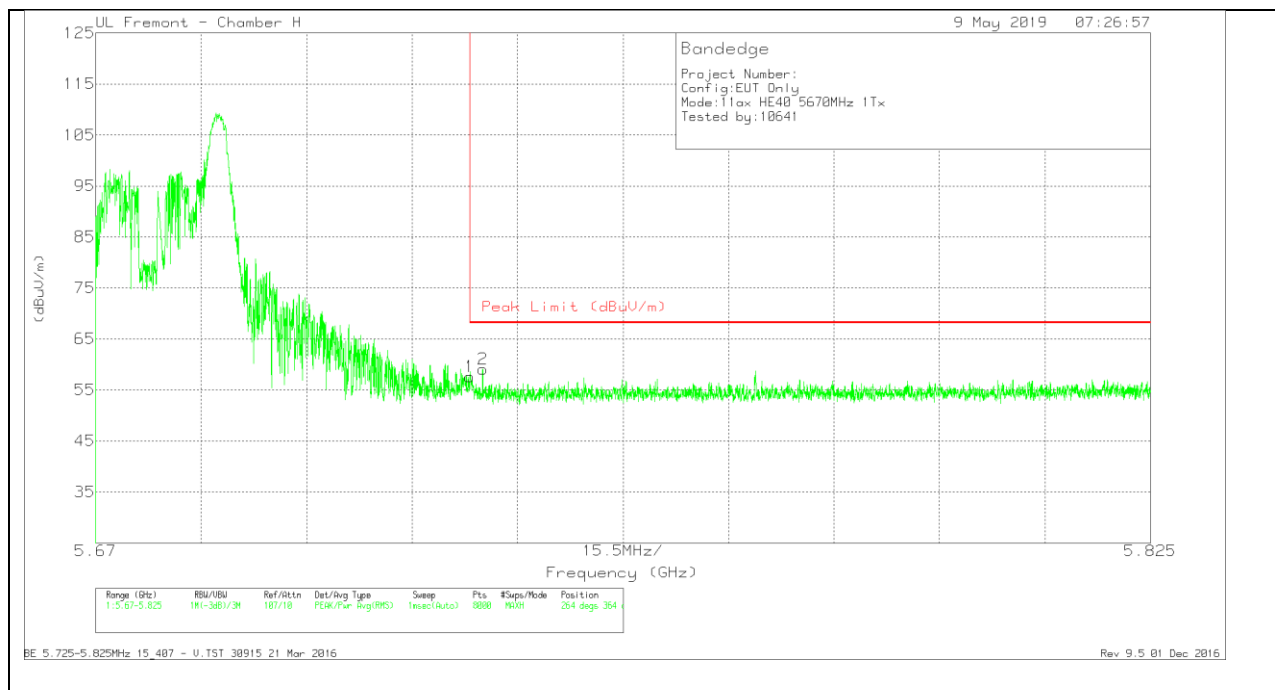

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.18	Pk	35.1	-20.7	57.58	68.2	-10.62	264	364	V
2	5.727	44.68	Pk	35.1	-20.7	59.08	68.2	-9.12	264	364	V

Pk - Peak detector

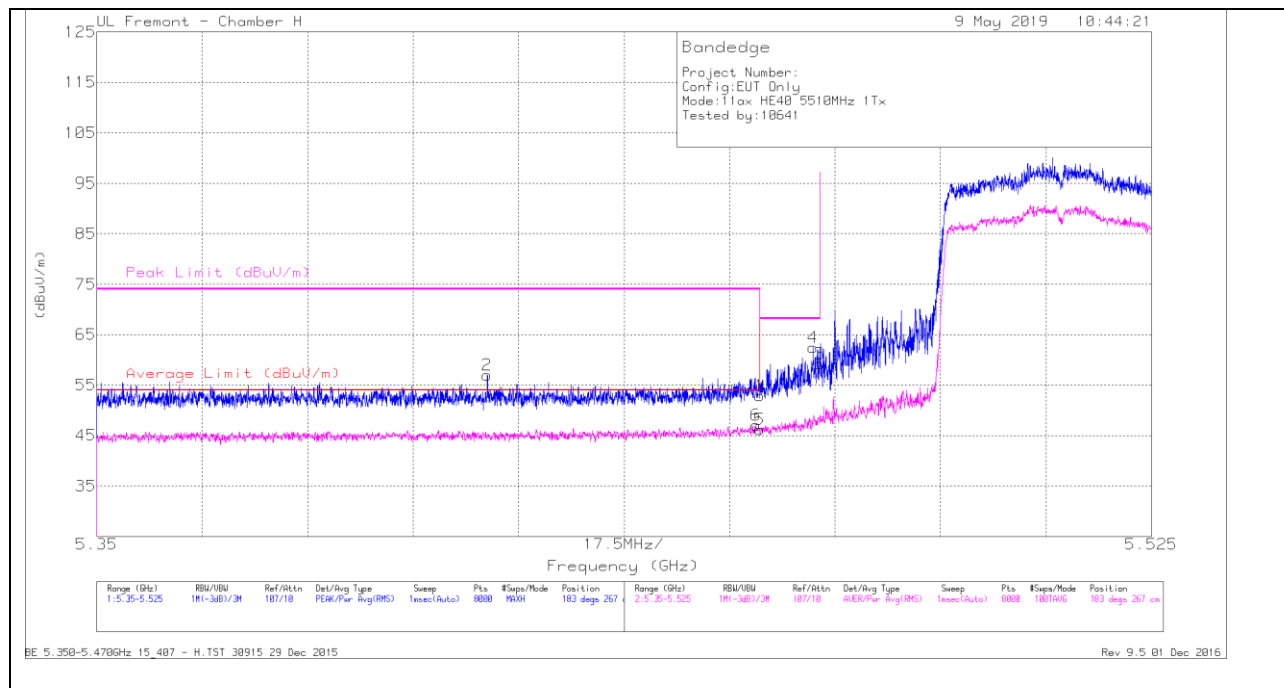1TX Antenna 5 MODE – 484 Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.7	Pk	34.6	-20.4	52.9	-	-	74	-21.1	183	267	H
2	* 5.415	42.74	Pk	34.6	-20.4	56.94	-	-	74	-17.06	183	267	H
5	* 5.46	32.01	RMS	34.6	-20.4	46.21	54	-7.79	-	-	183	267	H
6	* 5.459	32.84	RMS	34.6	-20.4	47.04	54	-6.96	-	-	183	267	H
4	5.469	48.46	Pk	34.5	-20.5	62.46	-	-	68.2	-5.74	183	267	H
3	5.47	45.23	Pk	34.5	-20.5	59.23	-	-	68.2	-8.97	183	267	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

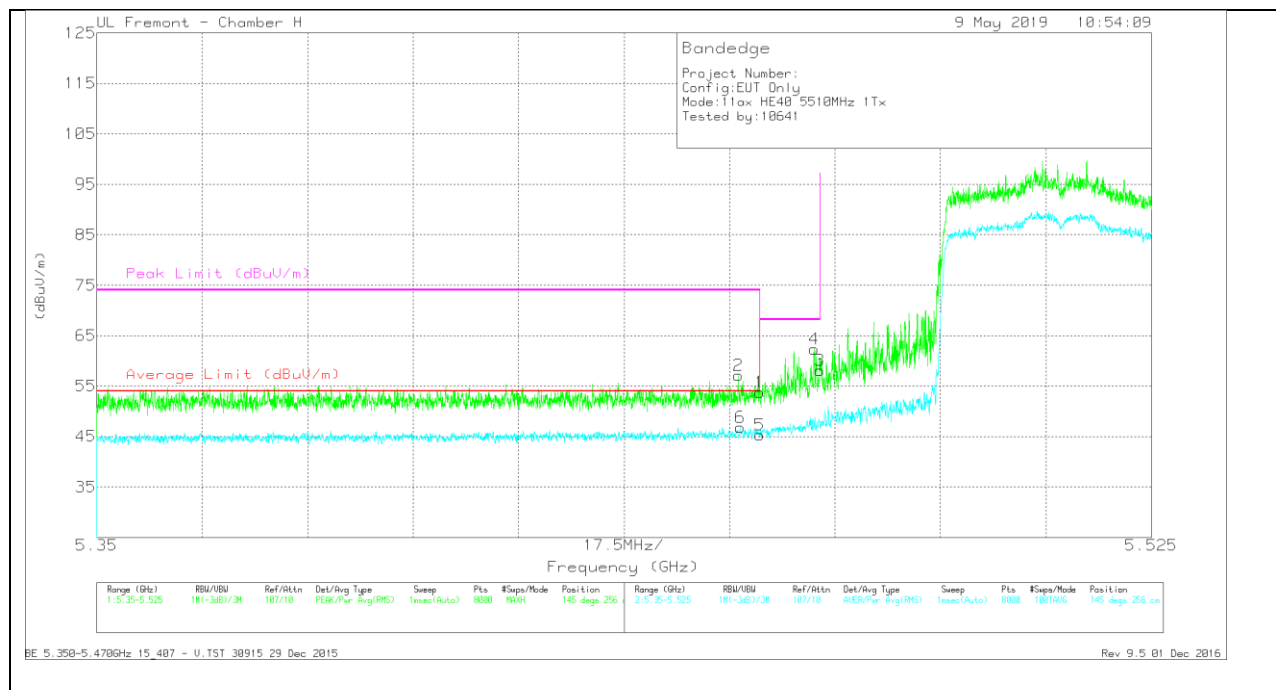


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.53	Pk	34.6	-20.4	53.73	-	-	74	-20.27	145	256	V
2	* 5.456	42.86	Pk	34.7	-20.4	57.16	-	-	74	-16.84	145	256	V
5	* 5.46	31.1	RMS	34.6	-20.4	45.3	54	-8.7	-	-	145	256	V
6	* 5.457	32.53	RMS	34.7	-20.4	46.83	54	-7.17	-	-	145	256	V
4	5.469	48.34	Pk	34.5	-20.5	62.34	-	-	68.2	-5.86	145	256	V
3	5.47	44.07	Pk	34.5	-20.5	58.07	-	-	68.2	-10.13	145	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

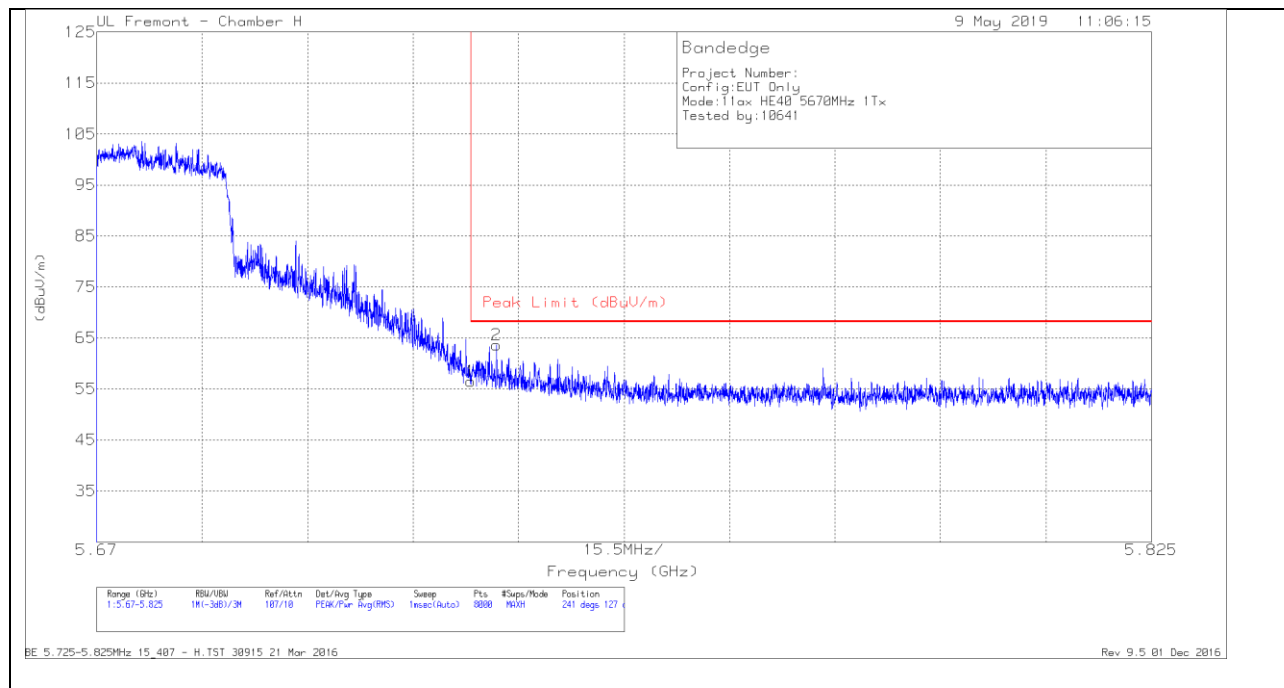BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.16	Pk	35.1	-20.7	56.56	68.2	-11.64	241	127	H
2	5.729	49.18	Pk	35.1	-20.7	63.58	68.2	-4.62	241	127	H


Pk - Peak detector

VERTICAL RESULT

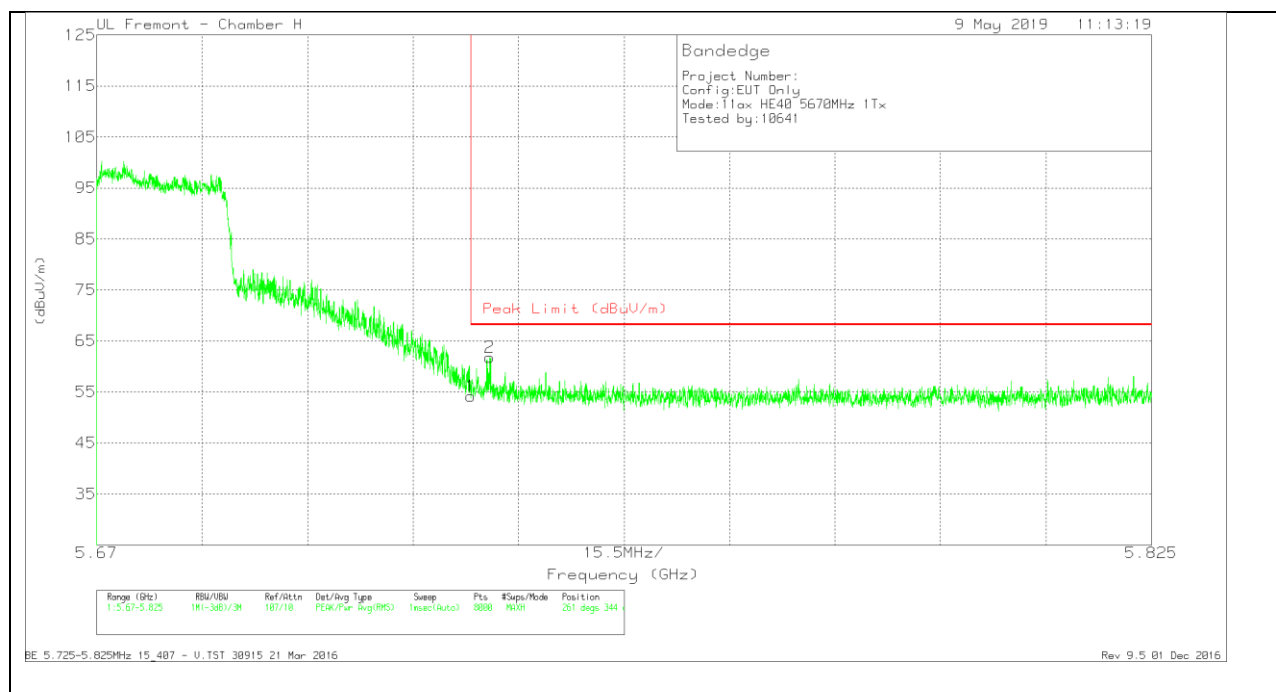

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.74	Pk	35.1	-20.7	54.14	68.2	-14.06	261	344	V
2	5.728	47.39	Pk	35.1	-20.7	61.79	68.2	-6.41	261	344	V

Pk - Peak detector

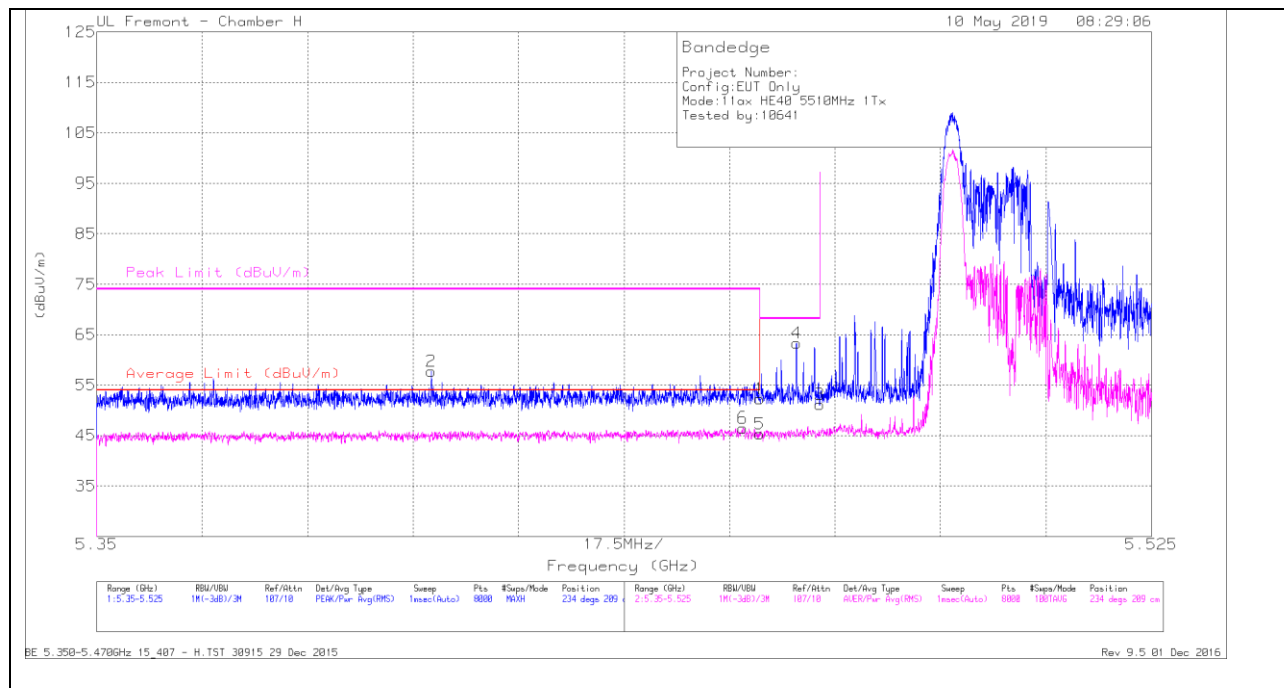1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.12	Pk	34.6	-20.4	52.32	-	-	74	-21.68	234	209	H
2	* 5.406	43.5	Pk	34.6	-20.4	57.7	-	-	74	-16.3	234	209	H
5	* 5.46	31.08	RMS	34.6	-20.4	45.28	54	-8.72	-	-	234	209	H
6	* 5.457	32.3	RMS	34.6	-20.4	46.5	54	-7.5	-	-	234	209	H
4	5.466	49.36	Pk	34.5	-20.5	63.36	-	-	68.2	-4.84	234	209	H
3	5.47	37.12	Pk	34.5	-20.5	51.12	-	-	68.2	-17.08	234	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

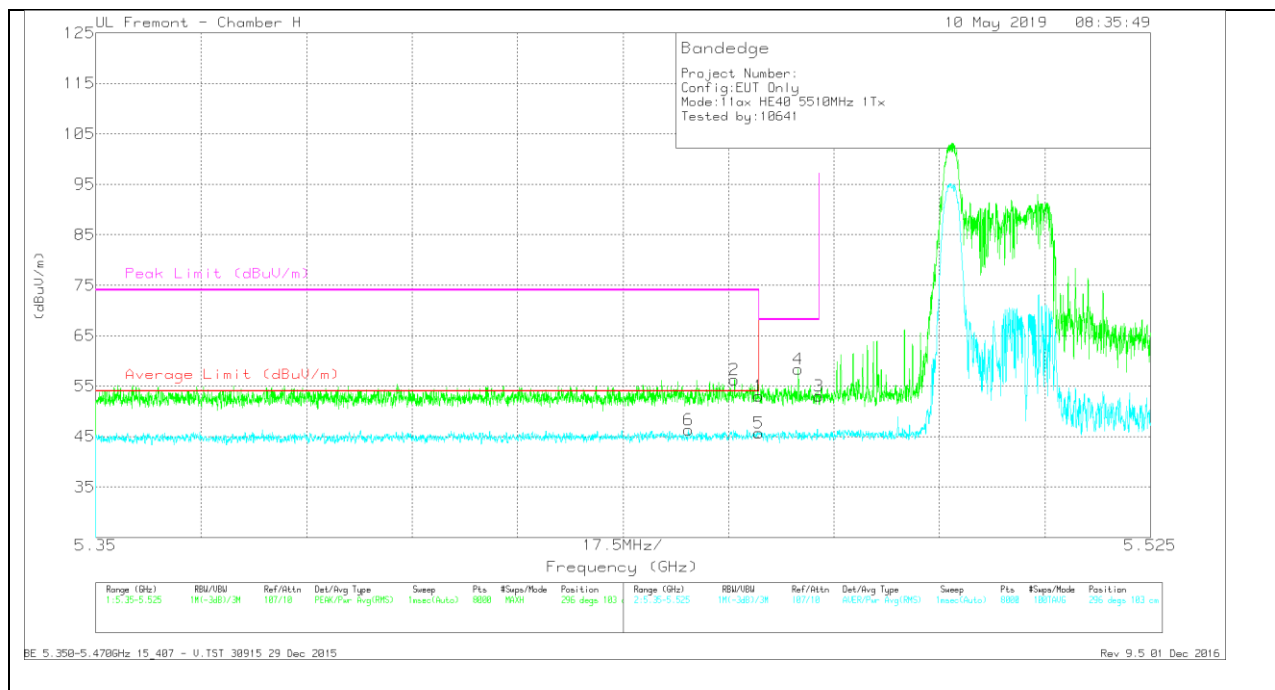


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.85	Pk	34.6	-20.4	53.05	-	-	74	-20.95	296	103	V
2	* 5.456	42.04	Pk	34.6	-20.4	56.24	-	-	74	-17.76	296	103	V
5	* 5.46	31.49	RMS	34.6	-20.4	45.69	54	-8.31	-	-	296	103	V
6	* 5.448	32.23	RMS	34.5	-20.4	46.33	54	-7.67	-	-	296	103	V
4	5.467	44.32	Pk	34.5	-20.5	58.32	-	-	68.2	-9.88	296	103	V
3	5.47	39.01	Pk	34.5	-20.5	53.01	-	-	68.2	-15.19	296	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

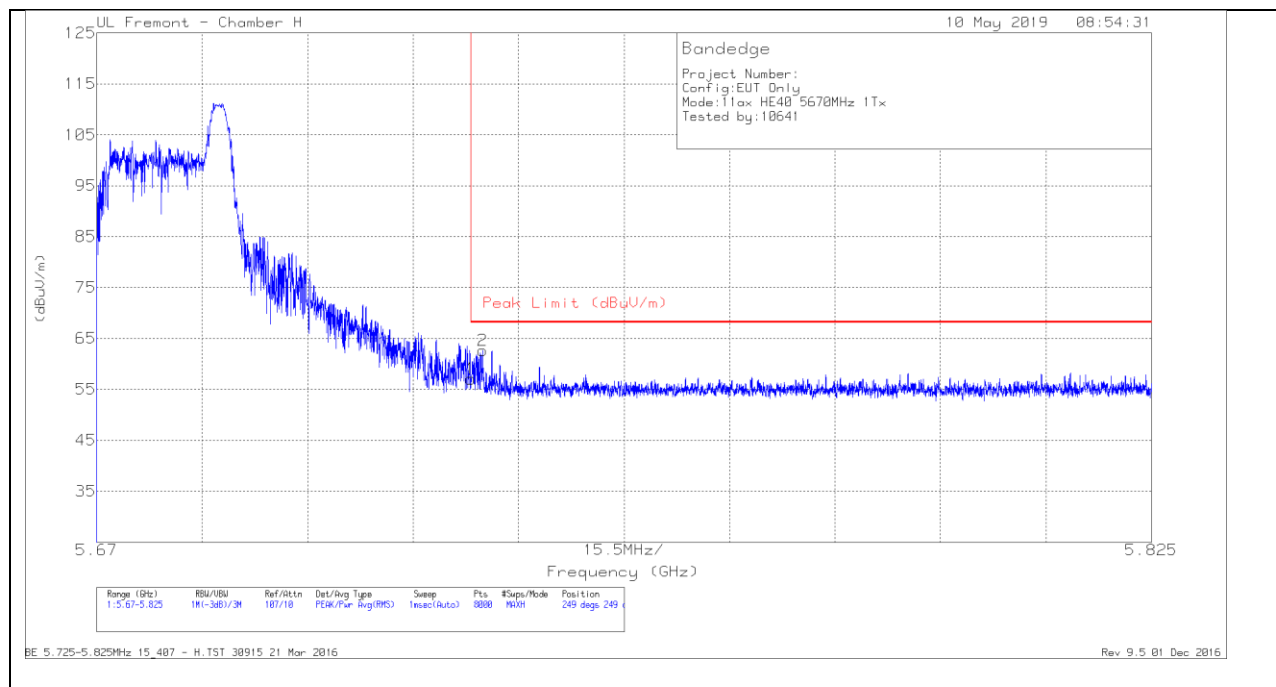1TX Antenna 5 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.66	Pk	35.1	-20.7	57.06	68.2	-11.14	249	249	H
2	5.727	48.26	Pk	35.1	-20.7	62.66	68.2	-5.54	249	249	H


Pk - Peak detector

VERTICAL RESULT

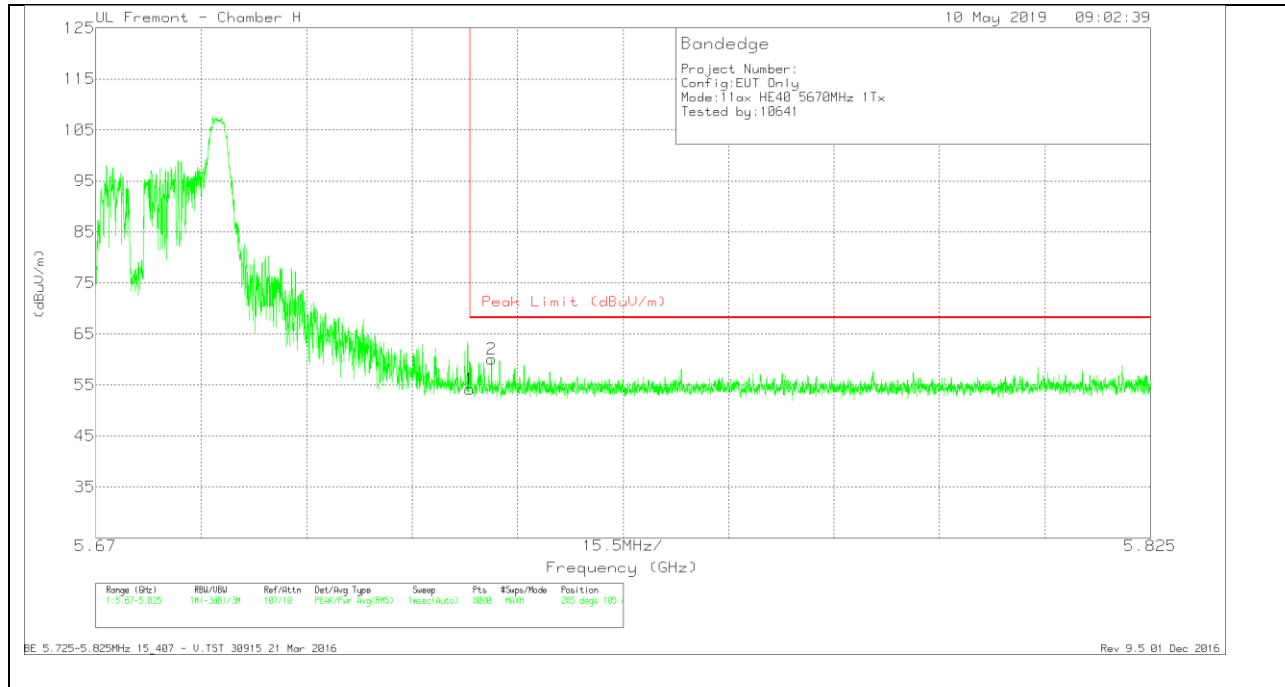

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.75	Pk	35.1	-20.7	54.15	68.2	-14.05	285	105	V
2	5.728	45.62	Pk	35.1	-20.7	60.02	68.2	-8.18	285	105	V

Pk - Peak detector

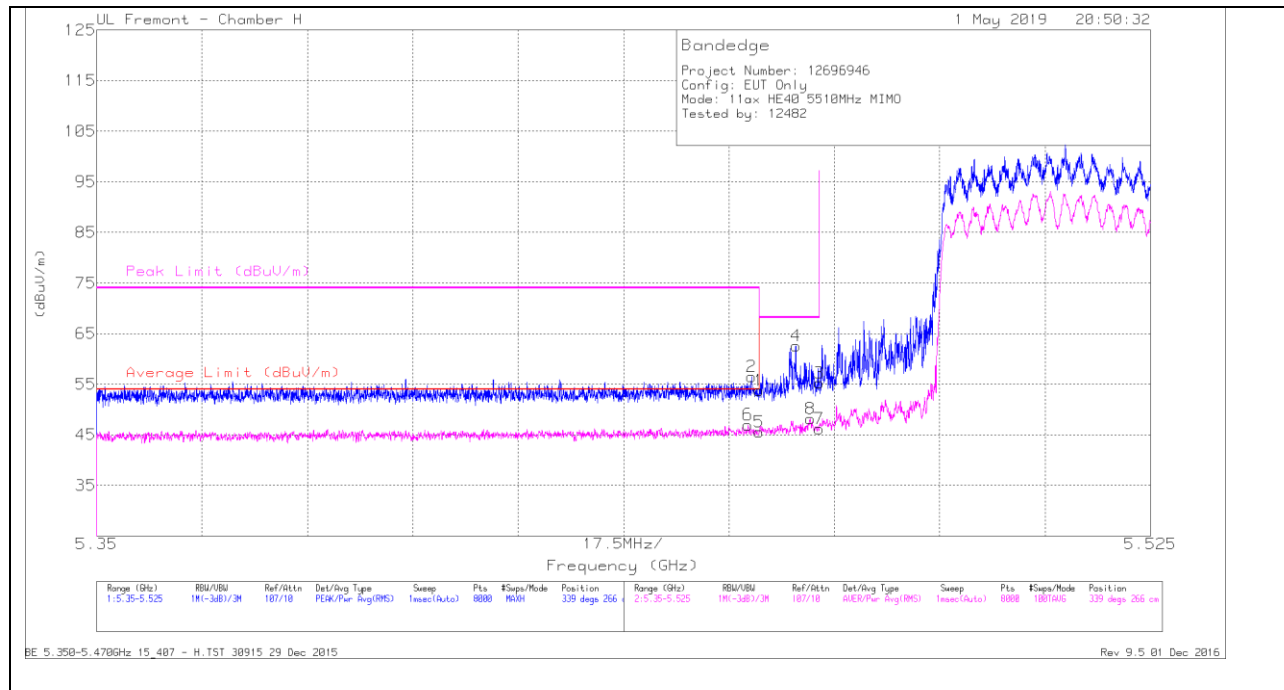BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF-T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.62	Pk	34.6	-20.4	53.82	-	-	74	-20.18	339	266	H
2	* 5.459	42.33	Pk	34.6	-20.4	56.53	-	-	74	-17.47	339	266	H
5	* 5.46	31.32	RMS	34.6	-20.4	45.52	54	-8.48	-	-	339	266	H
6	* 5.458	32.8	RMS	34.6	-20.4	47	54	-7	-	-	339	266	H
4	5.466	48.6	Pk	34.5	-20.5	62.6	-	-	68.2	-5.6	339	266	H
8	5.469	34.14	RMS	34.5	-20.5	48.14	-	-	-	-	339	266	H
3	5.47	41.23	Pk	34.5	-20.5	55.23	-	-	68.2	-12.97	339	266	H
7	5.47	32.16	RMS	34.5	-20.5	46.16	-	-	-	-	339	266	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

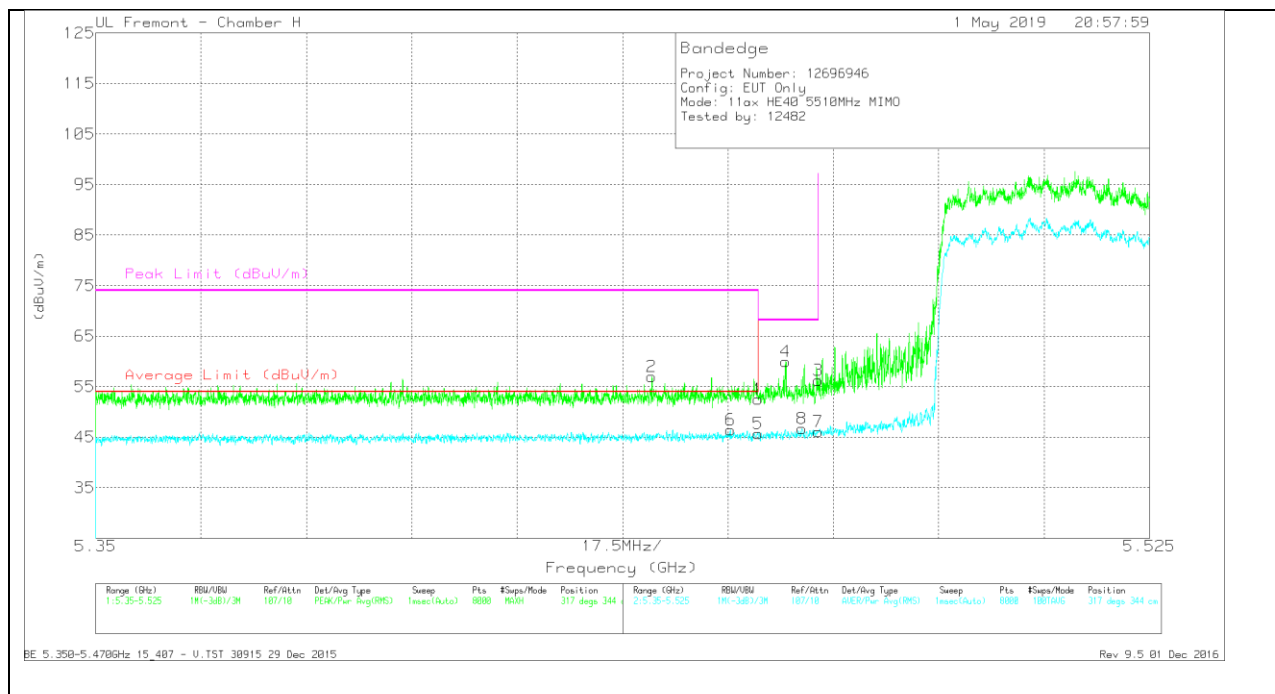


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.38	Pk	34.6	-20.4	52.58	-	-	74	-21.42	317	344	V
2	* 5.442	42.79	Pk	34.6	-20.4	56.99	-	-	74	-17.01	317	344	V
5	* 5.46	31.52	RMS	34.6	-20.4	45.72	54	-8.28	-	-	317	344	V
6	* 5.455	32.14	RMS	34.7	-20.4	46.44	54	-7.56	-	-	317	344	V
4	5.465	45.93	Pk	34.5	-20.5	59.93	-	-	68.2	-8.27	317	344	V
8	5.467	32.72	RMS	34.5	-20.5	46.72	-	-	-	-	317	344	V
3	5.47	42.29	Pk	34.5	-20.5	56.29	-	-	68.2	-11.91	317	344	V
7	5.47	32.06	RMS	34.5	-20.5	46.06	-	-	-	-	317	344	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

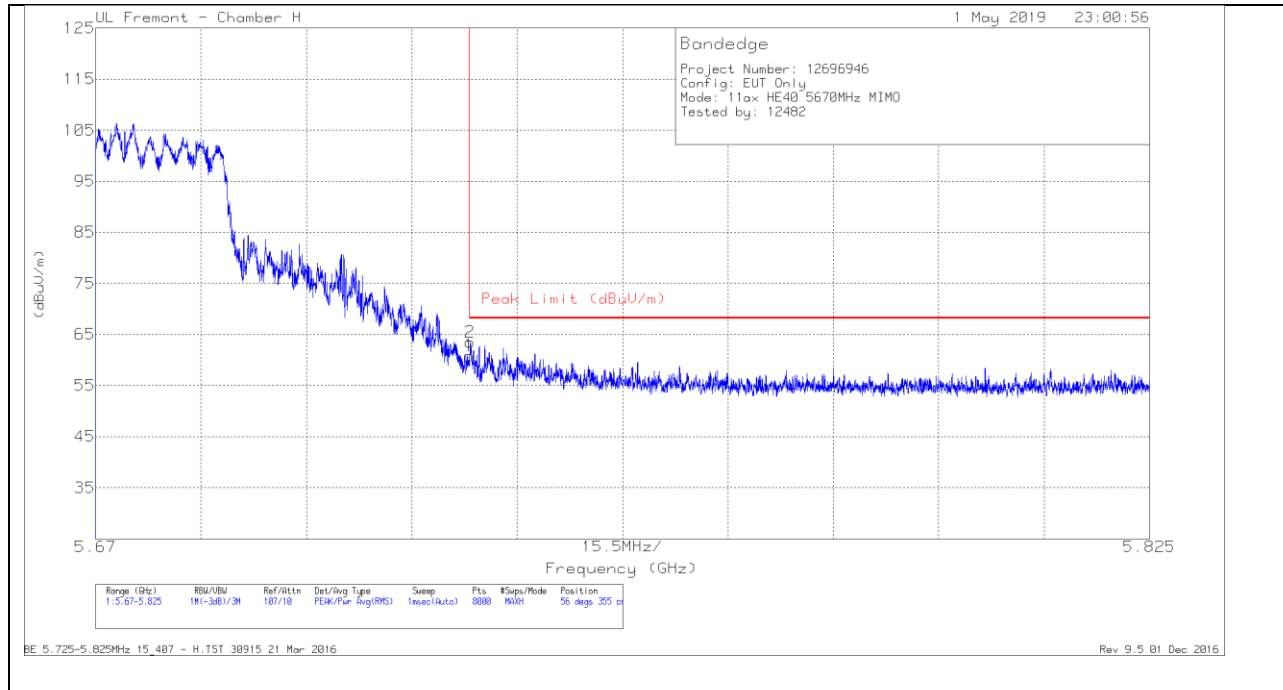BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.46	Pk	35.1	-20.7	60.86	68.2	-7.34	56	355	H
2	5.725	49.05	Pk	35.1	-20.7	63.45	68.2	-4.75	56	355	H

Pk - Peak detector