
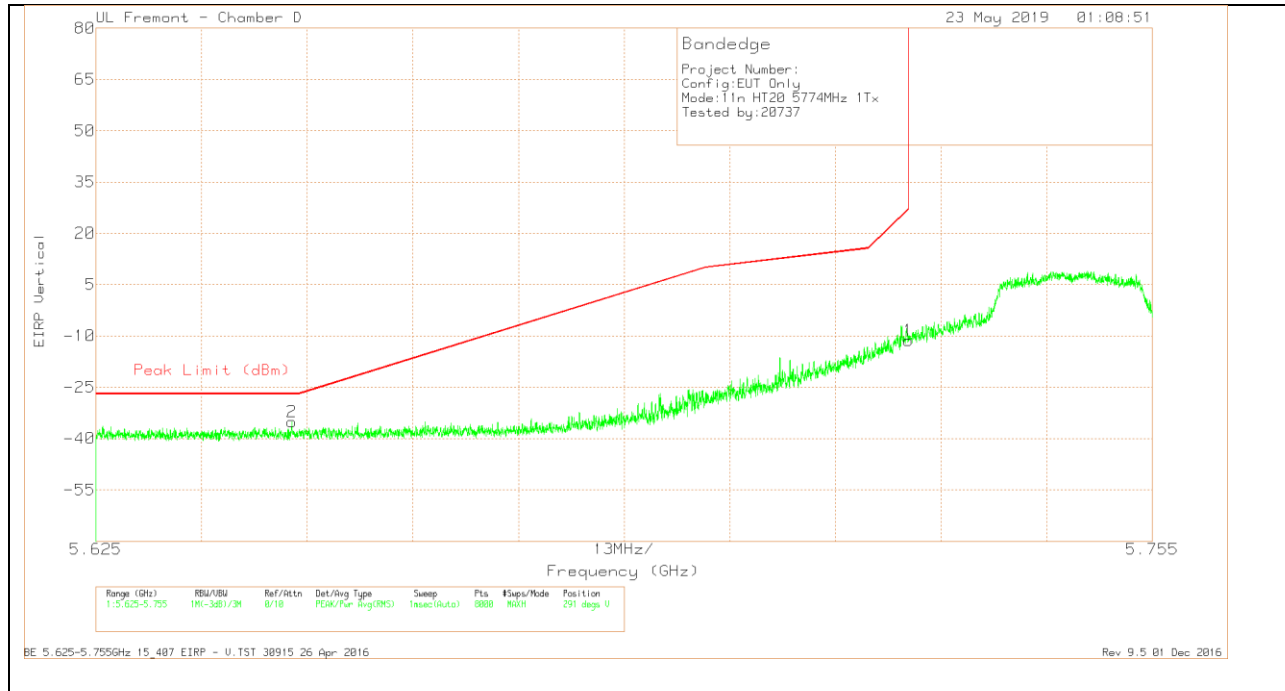


VERTICAL RESULT

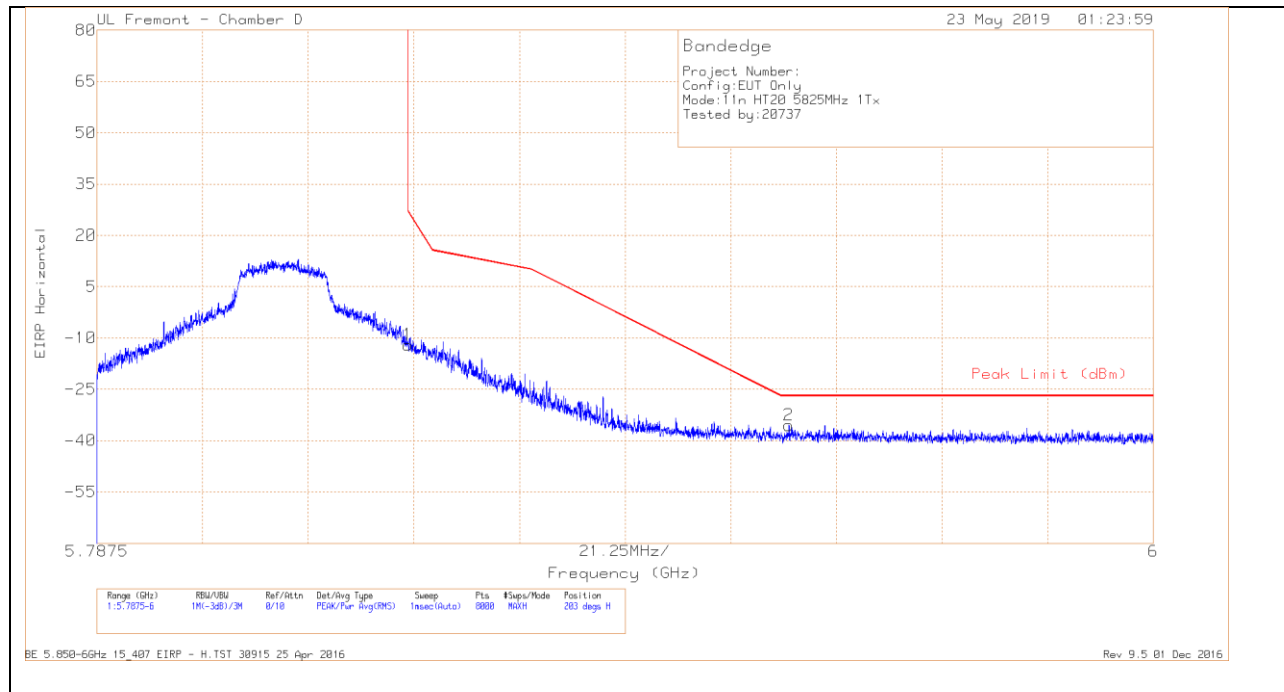

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-64.05	Pk	34.5	-17.4	11.8	-35.15	-27	-8.15	291	119	V
1	5.725	-40.25	Pk	34.6	-17.5	11.8	-11.35	27	-38.35	291	119	V


Pk - Peak detector

BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.97	Pk	34.7	-17.5	11.8	-11.97	26.98	-38.95	203	188	H
2	5.927	-64.94	Pk	34.9	-17.3	11.8	-35.54	-27	-8.54	203	188	H


Pk - Peak detector

VERTICAL RESULT

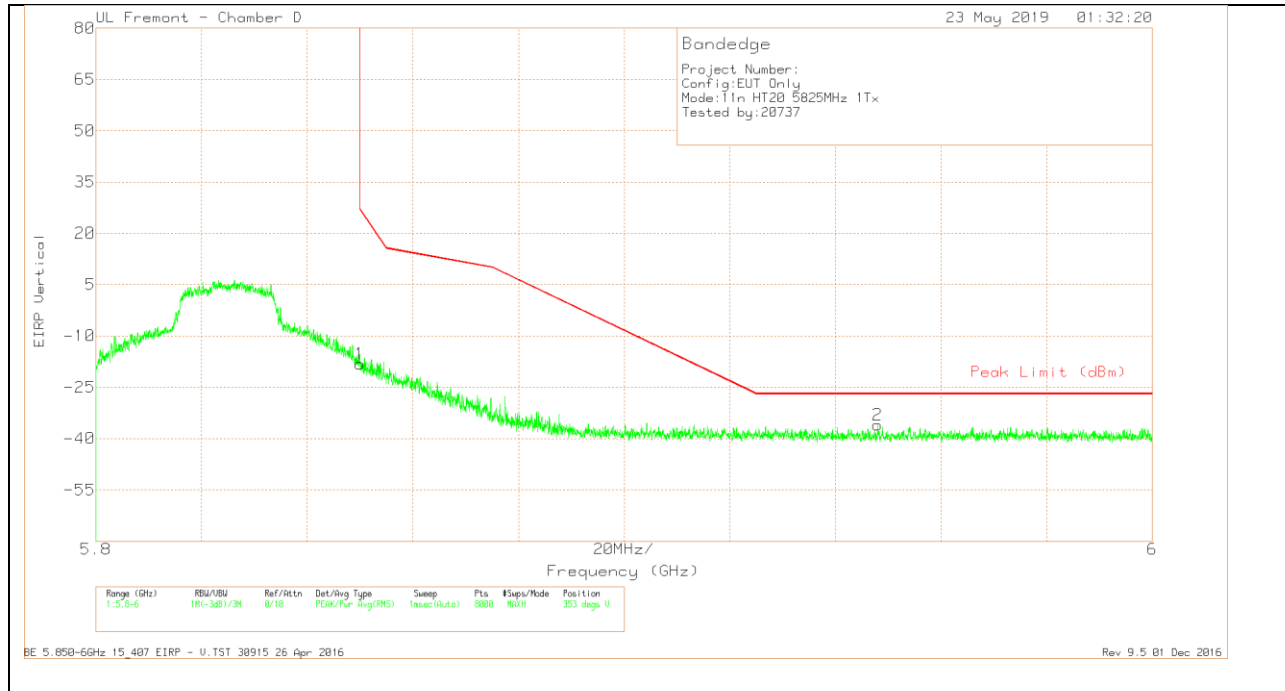

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.16	Pk	34.7	-17.5	11.8	-18.16	26.99	-45.15	353	148	V
2	5.948	-65.56	Pk	35	-17.3	11.8	-36.06	-27	-9.06	353	148	V


Pk - Peak detector

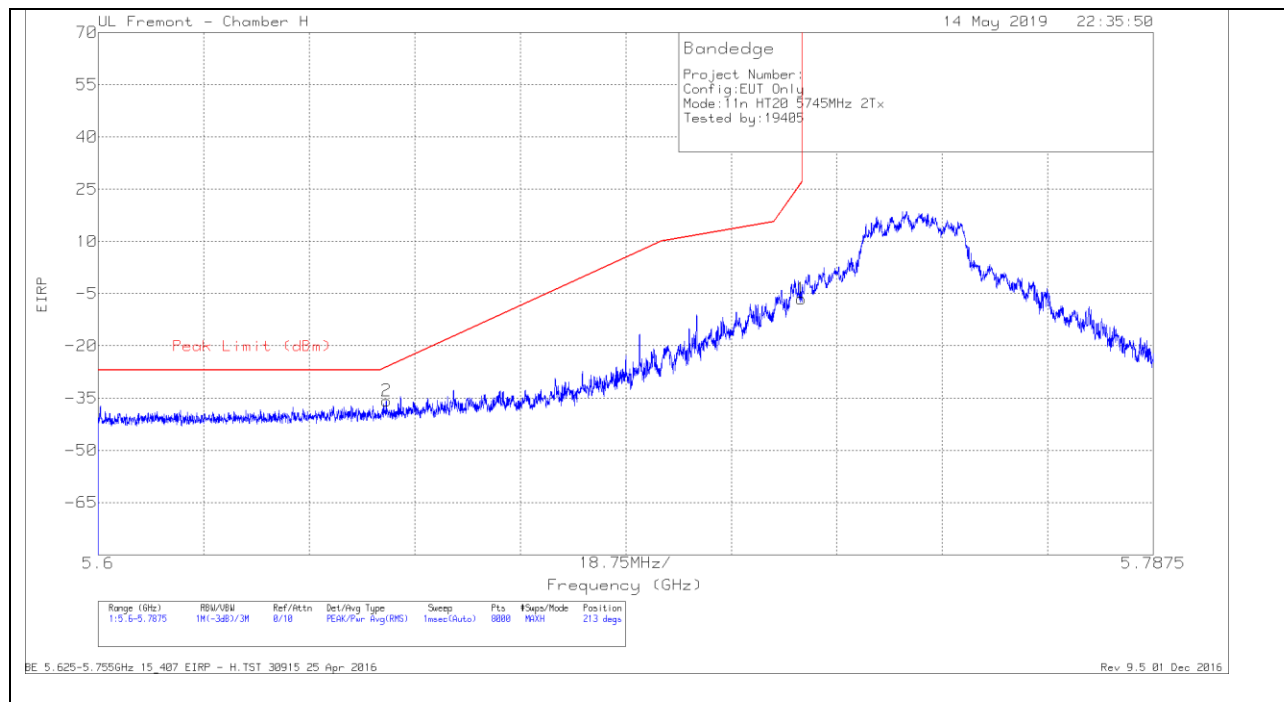2TX Antenna 4 + Antenna 5 CDD MODE**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.651	-61.86	Pk	34.9	-20.6	11.8	-35.76	-26.12	-9.64	213	133	H
1	5.725	-32.67	Pk	35.1	-20.7	11.8	-6.47	26.96	-33.43	213	133	H


Pk - Peak detector

VERTICAL RESULT

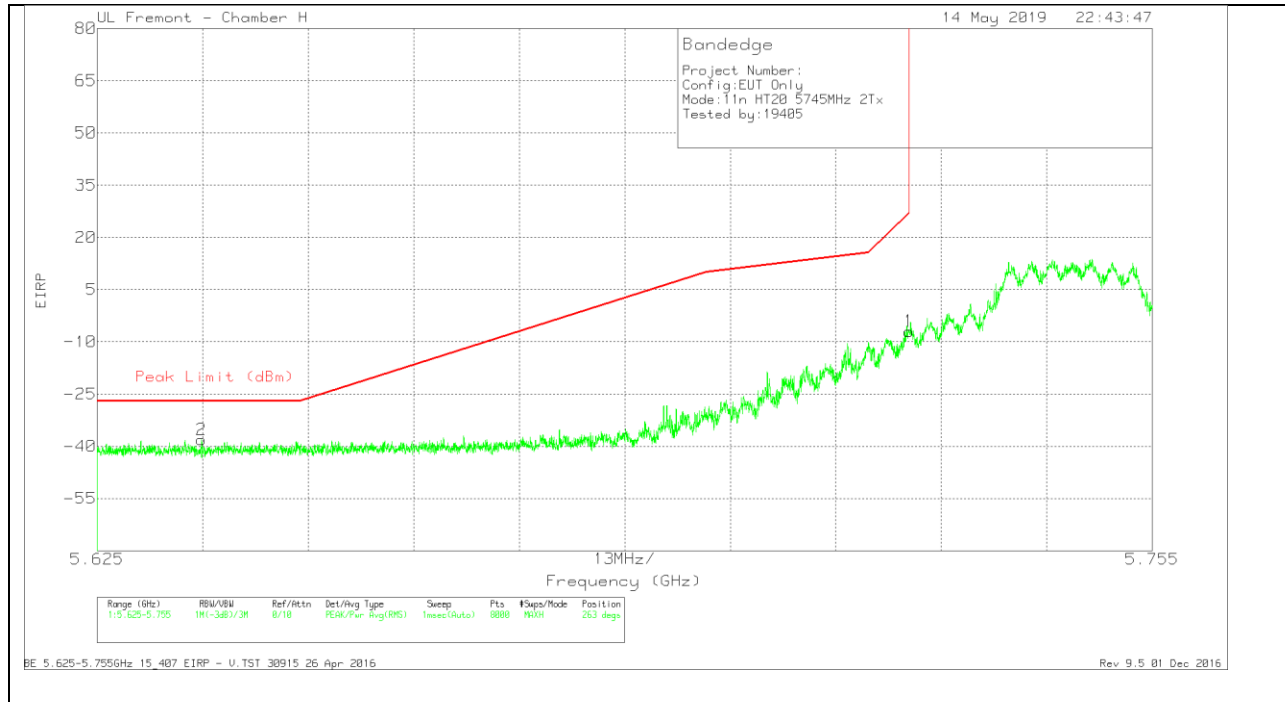


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638	-64.21	Pk	34.9	-20.6	11.8	-38.11	-27	-11.11	263	397	V
1	5.725	-33.17	Pk	35.1	-20.7	11.8	-6.97	27	-33.97	263	397	V

Pk - Peak detector

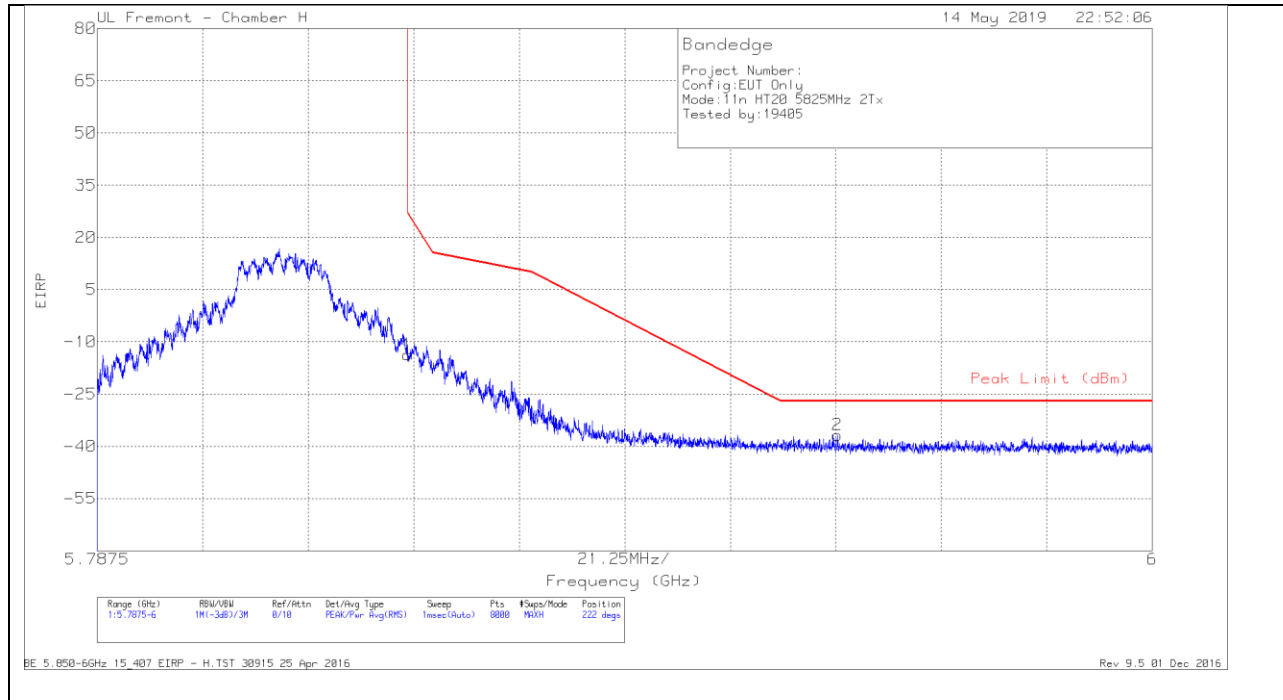BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Pk - Peak detector

VERTICAL RESULT

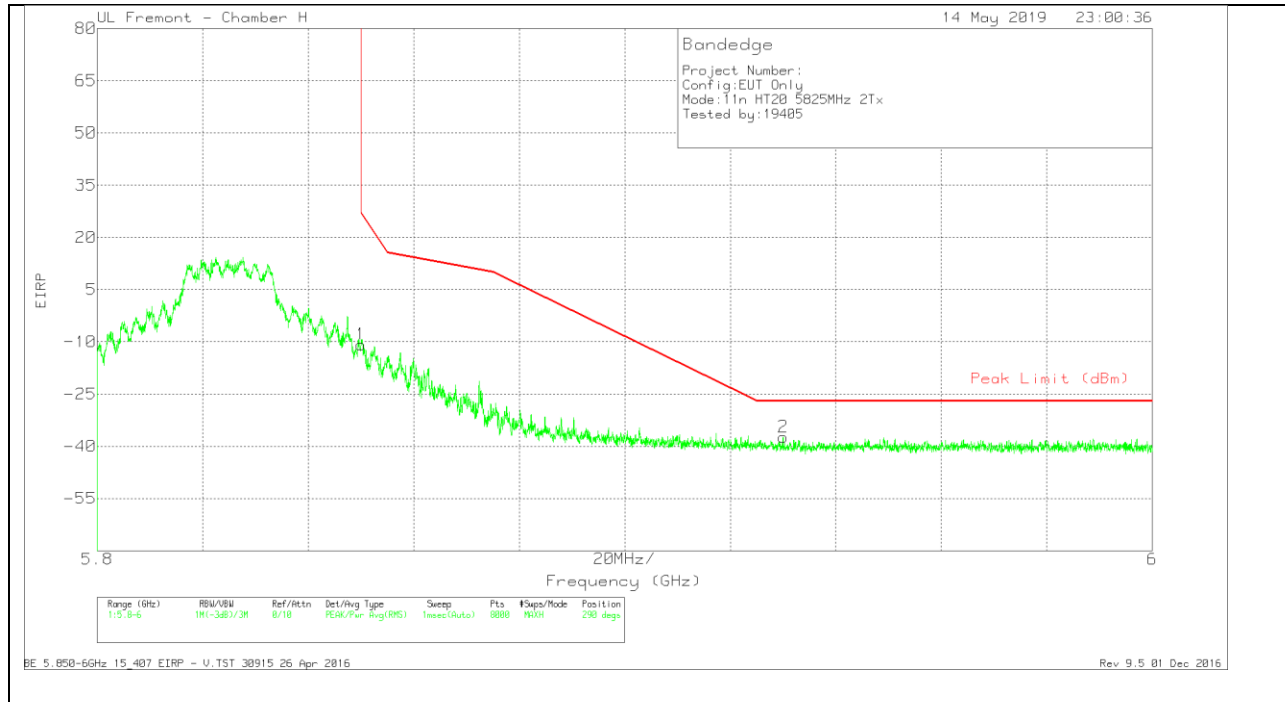

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.66	Pk	35.5	-20.4	11.8	-10.76	26.99	-37.75	290	105	V
2	5.93	-64.54	Pk	35.6	-20.2	11.8	-37.34	-27	-10.34	290	105	V


Pk - Peak detector

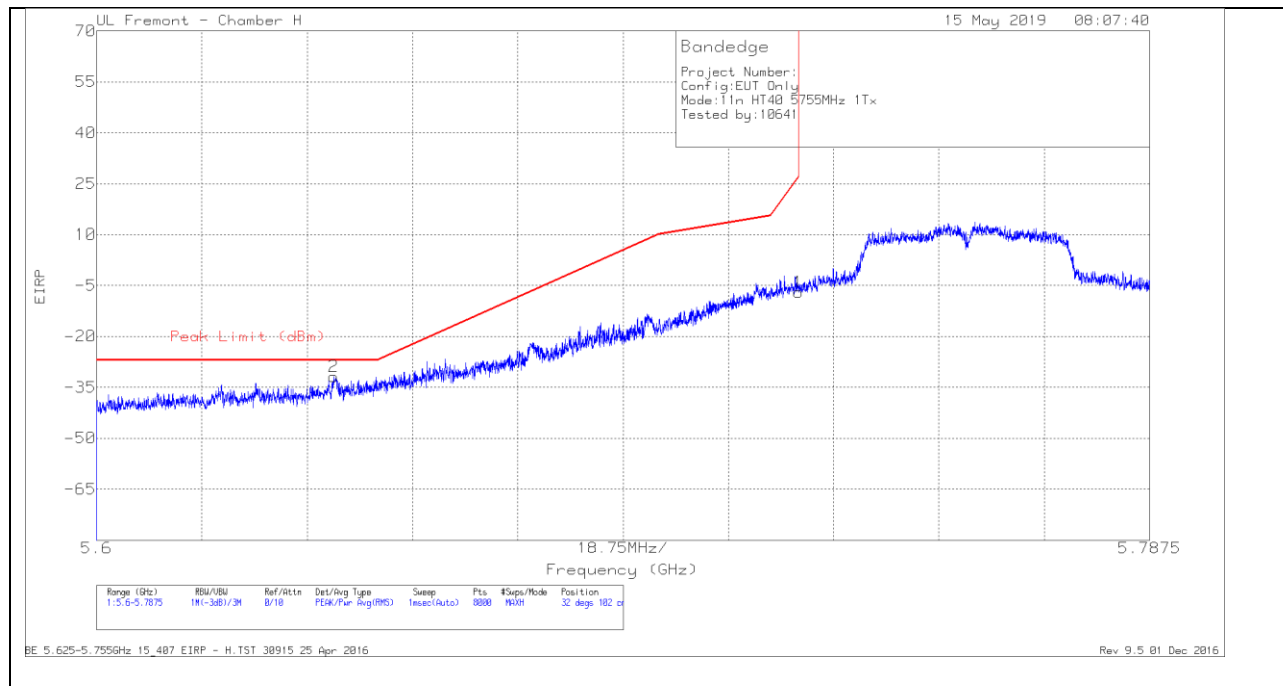1.1.20. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND**1TX Antenna 4 MODE****BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-58.05	Pk	35	-20.6	11.8	-31.85	-27	-4.85	32	102	H
1	5.725	-33.07	Pk	35.1	-20.7	11.8	-6.87	26.96	-33.83	32	102	H

Pk - Peak detector

VERTICAL RESULT

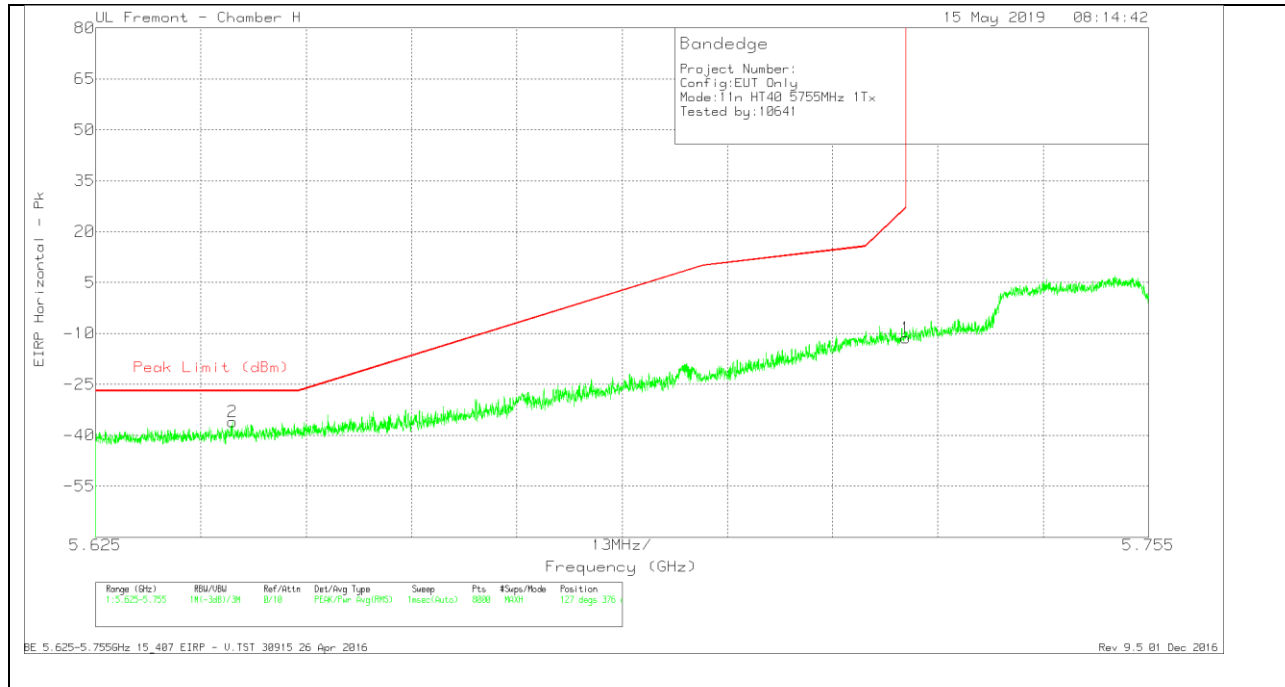


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-62.2	Pk	35	-20.6	11.8	-36	-27	-9	127	376	V
1	5.725	-37.46	Pk	35.1	-20.7	11.8	-11.26	27	-38.26	127	376	V

Pk - Peak detector

BE 5.625-5.755GHz 15_407 EIRP - V.TST 30915 26 Apr 2016

Rev 9.5 01 Dec 2016

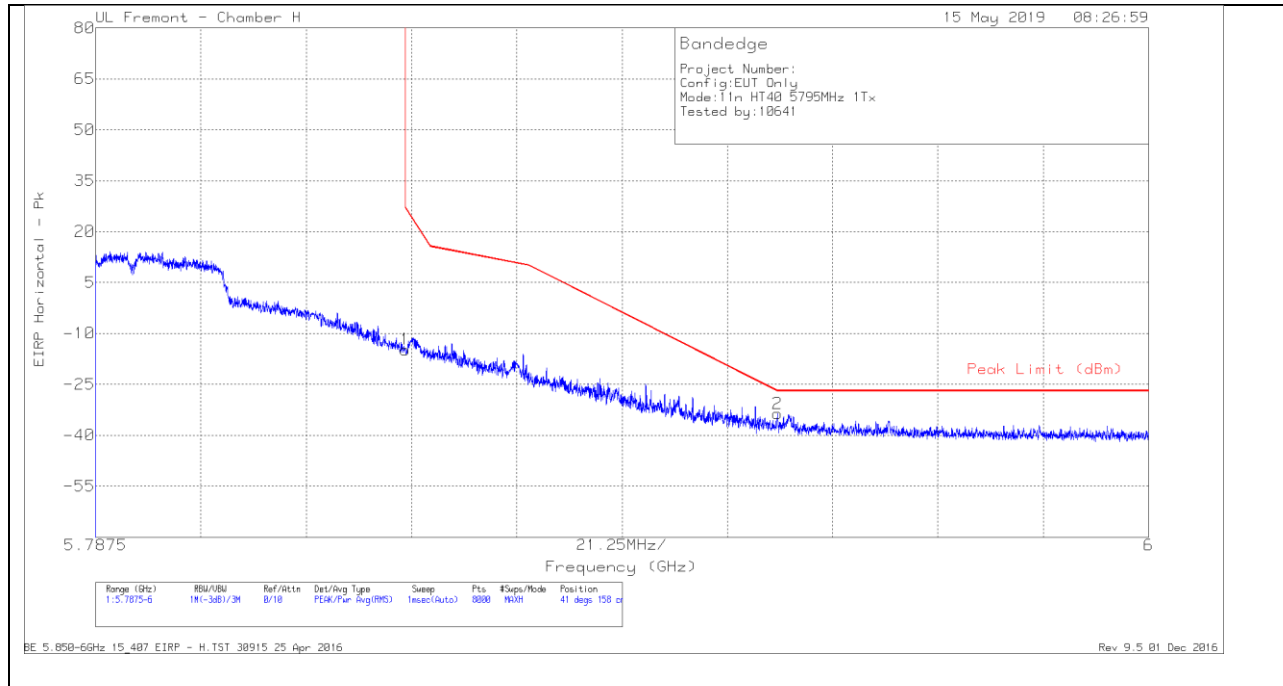BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41.63	Pk	35.5	-20.4	11.8	-14.73	26.98	-41.71	41	158	H
2	5.925	-60.89	Pk	35.6	-20.2	11.8	-33.69	-27	-6.69	41	158	H

Pk - Peak detector

BE 5.850-6GHz 15_407 EIRP - H.TST 30915 25 Apr 2016

Rev 9.5 01 Dec 2016

VERTICAL RESULT

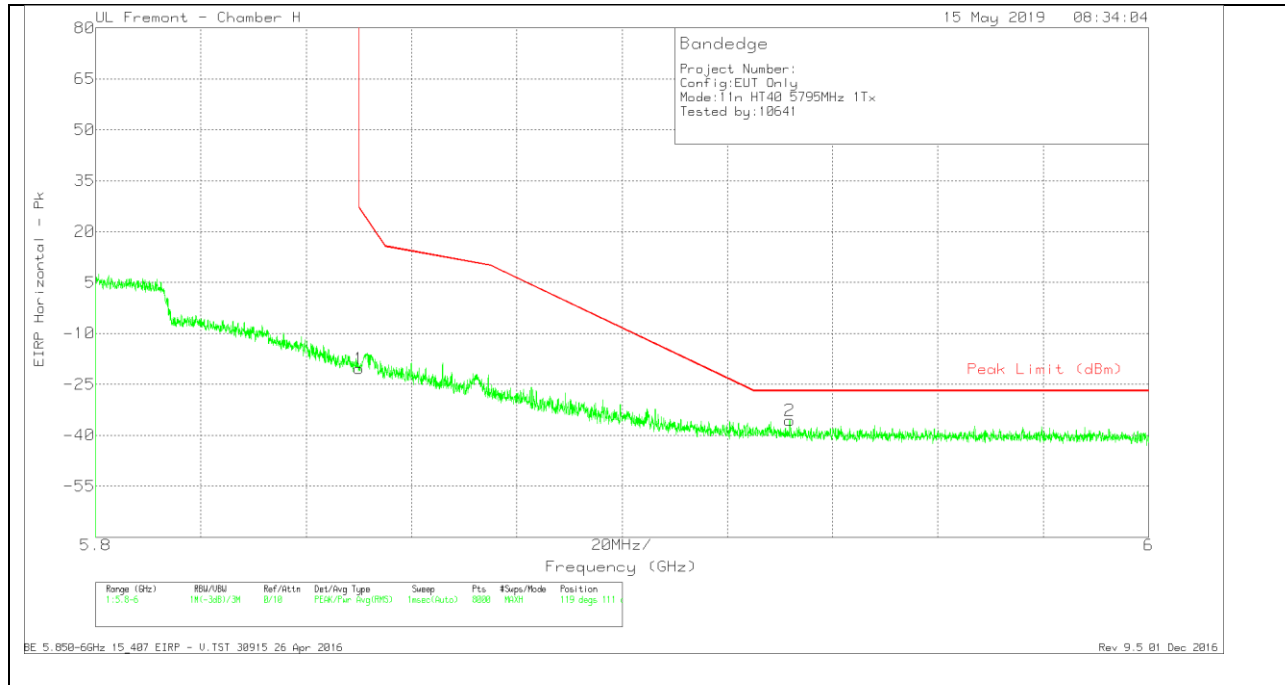

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.3	Pk	35.5	-20.4	11.8	-20.4	26.99	-47.39	119	111	V
2	5.932	-62.76	Pk	35.6	-20.2	11.8	-35.56	-27	-8.56	119	111	V

Pk - Peak detector


BE 5.850-6GHz 15_407 EIRP - V.TST 30915 26 Apr 2016

Rev 9.5 01 Dec 2016

1TX Antenna 5 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

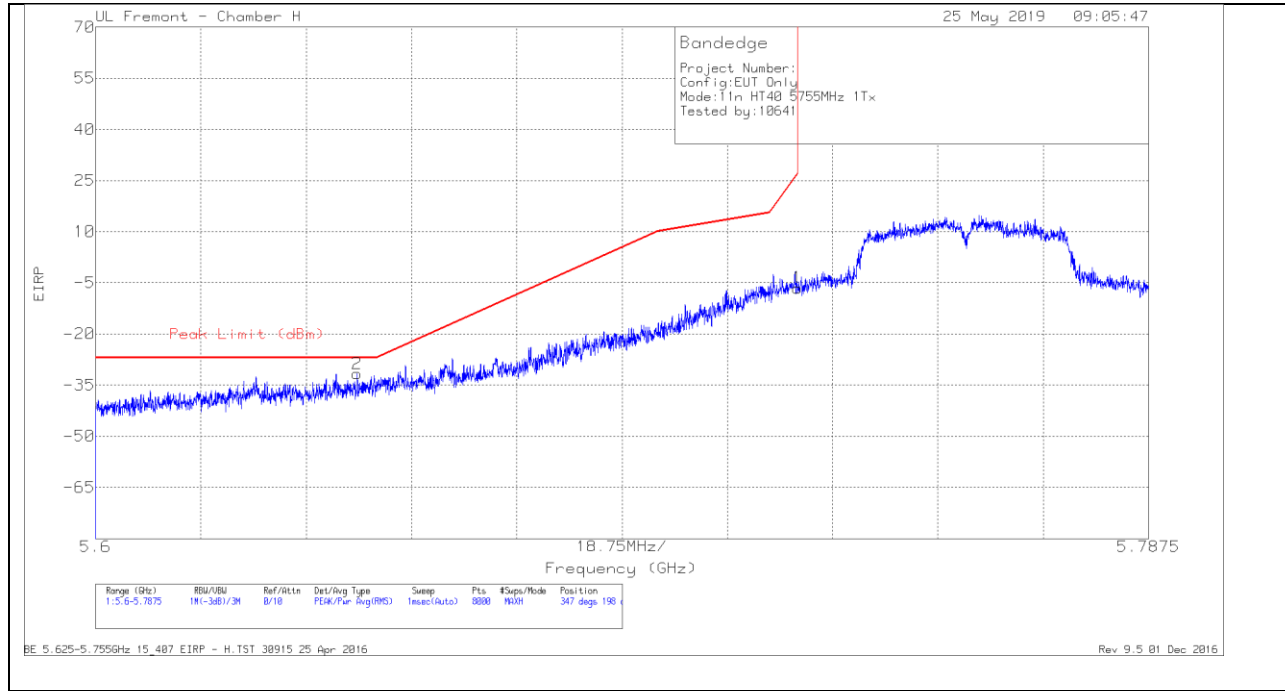

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647	-57.86	Pk	35	-20.6	11.8	-31.66	-27	-4.66	347	198	H
1	5.725	-32.69	Pk	35.1	-20.7	11.8	-6.49	26.96	-33.45	347	198	H


Pk - Peak detector

VERTICAL RESULT

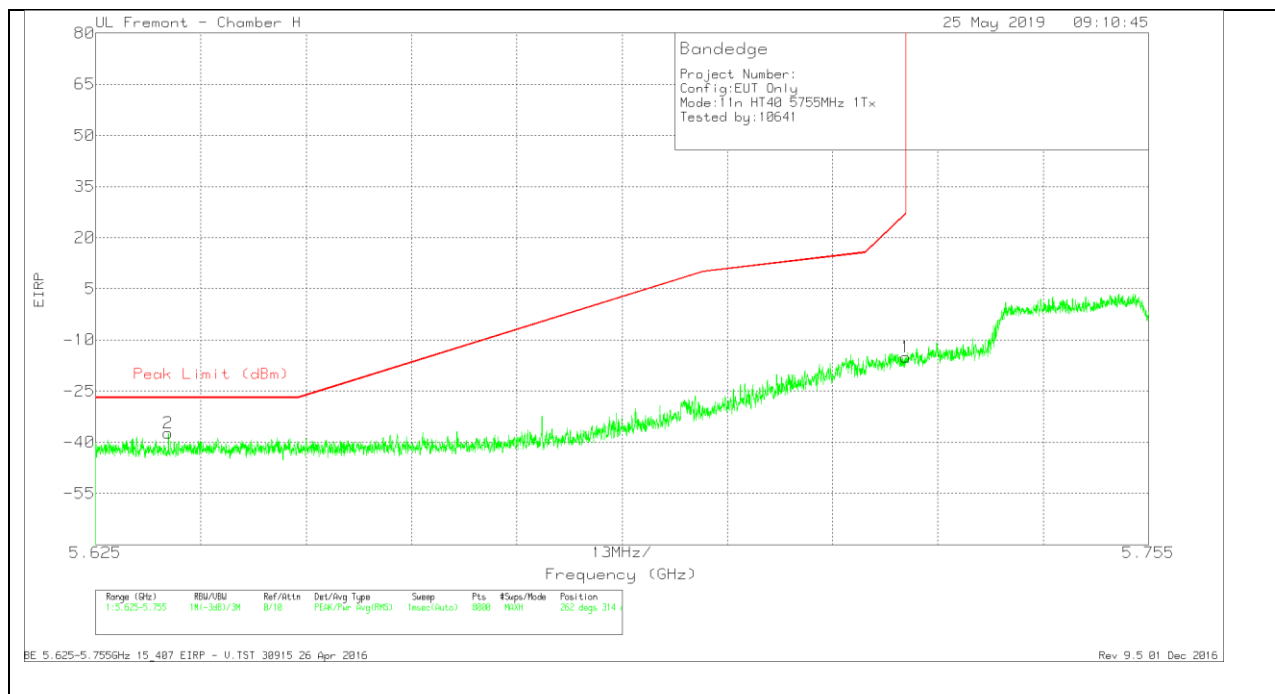

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.634	-63.23	Pk	34.9	-20.7	11.8	-37.23	-27	-10.23	262	314	V
1	5.725	-41.29	Pk	35.1	-20.7	11.8	-15.09	27	-42.09	262	314	V


Pk - Peak detector

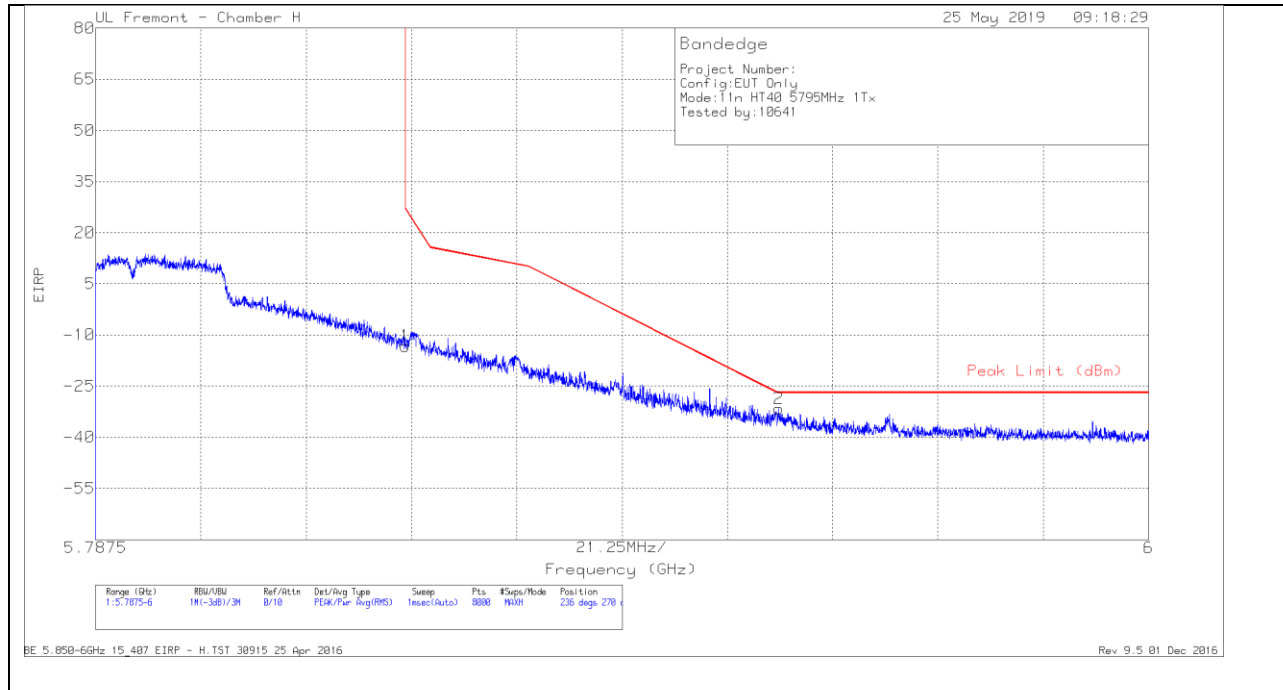BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.15	Pk	35.5	-20.4	11.8	-13.25	26.98	-40.23	236	270	H
2	5.925	-58.85	Pk	35.6	-20.2	11.8	-31.65	-27	-4.65	236	270	H

Pk - Peak detector

VERTICAL RESULT

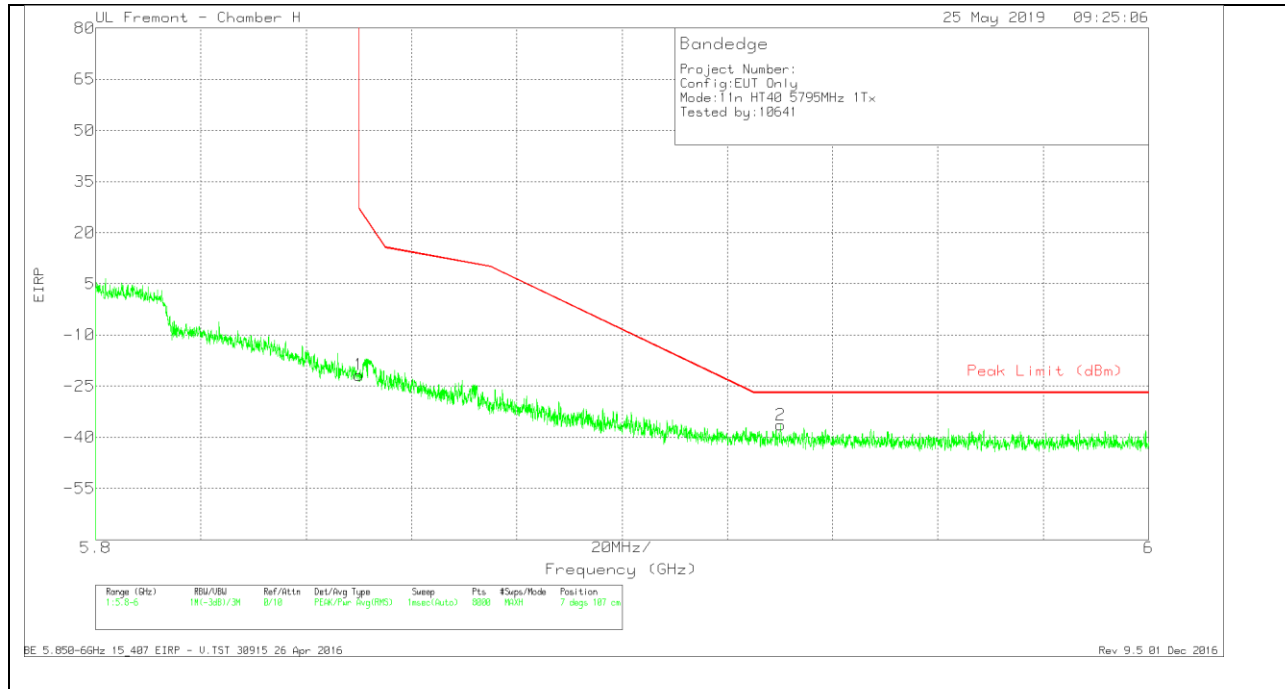

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.63	Pk	35.5	-20.4	11.8	-21.73	26.99	-48.72	7	107	V
2	5.93	-63.58	Pk	35.6	-20.2	11.8	-36.38	-27	-9.38	7	107	V

Pk - Peak detector


BE 5.850-6GHz 15_407 EIRP - V.TST 30915 26 Apr 2016

Rev 9.5 01 Dec 2016

2TX Antenna 4 + Antenna 5 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

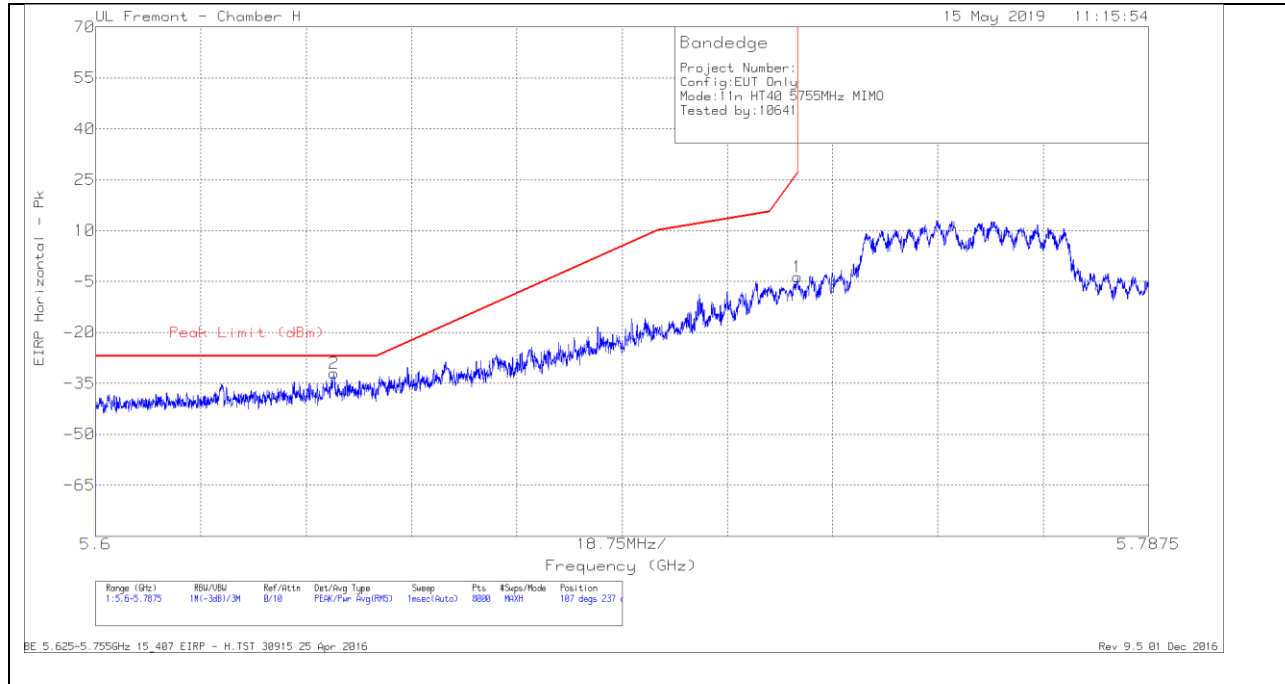


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-58.19	Pk	35	-20.6	11.8	-31.99	-27	-4.99	107	237	H
1	5.725	-29.82	Pk	35.1	-20.7	11.8	-3.62	26.96	-30.58	107	237	H

Pk - Peak detector

BE 5.625-5.755GHz 15.407 EIRP - H.TST 30915 25 Apr 2016


Rev 9.5 01 Dec 2016

VERTICAL RESULT

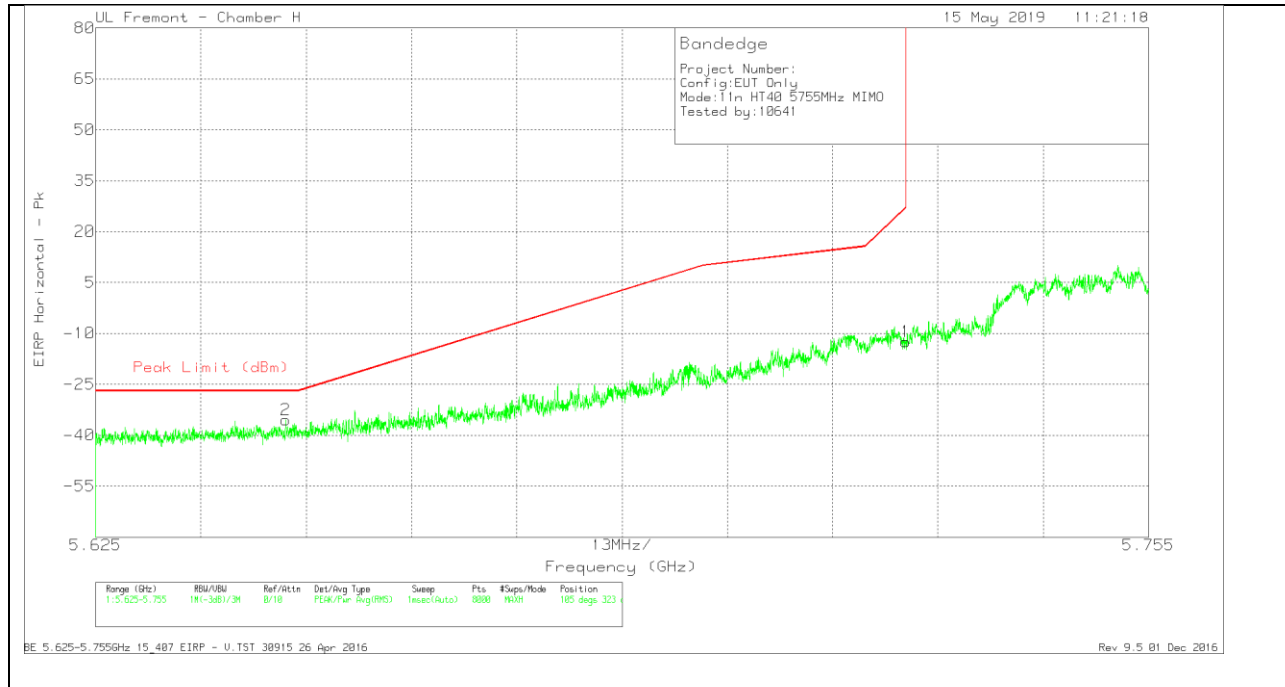

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-61.61	Pk	34.9	-20.6	11.8	-35.51	-27	-8.51	105	323	V
1	5.725	-38.67	Pk	35.1	-20.7	11.8	-12.47	27	-39.47	105	323	V


Pk - Peak detector

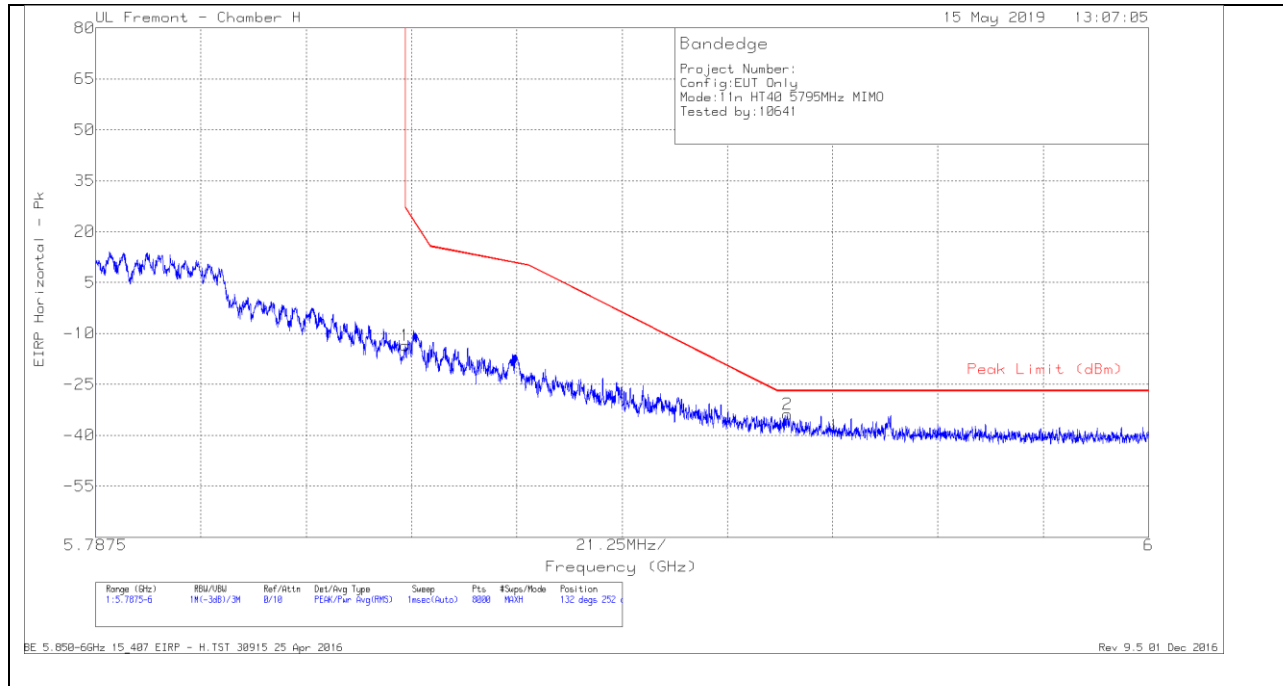BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.45	Pk	35.5	-20.4	11.8	-13.55	26.98	-40.53	132	252	H
2	5.927	-61.17	Pk	35.6	-20.1	11.8	-33.87	-27	-6.87	132	252	H

Pk - Peak detector

VERTICAL RESULT

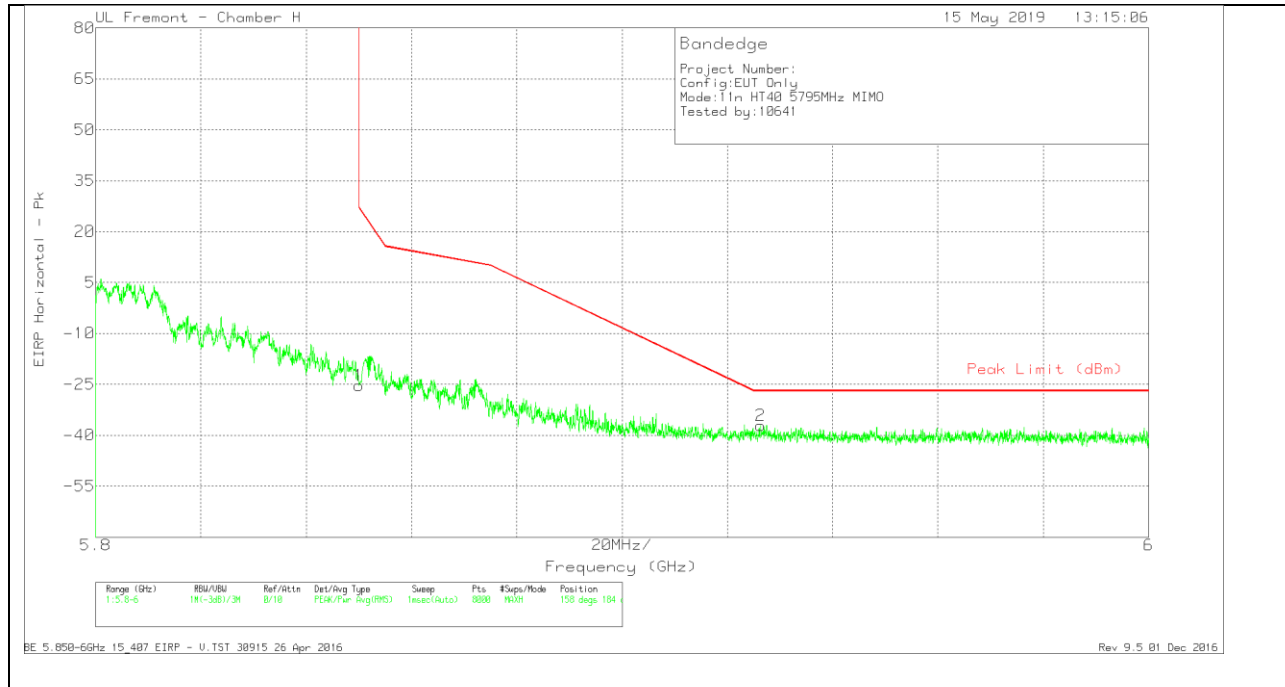

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.22	Pk	35.5	-20.4	11.8	-25.32	26.99	-52.31	158	184	V
2	5.926	-64.35	Pk	35.6	-20.1	11.8	-37.05	-27	-10.05	158	184	V


Pk - Peak detector

1.1.21. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX Antenna 4 MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

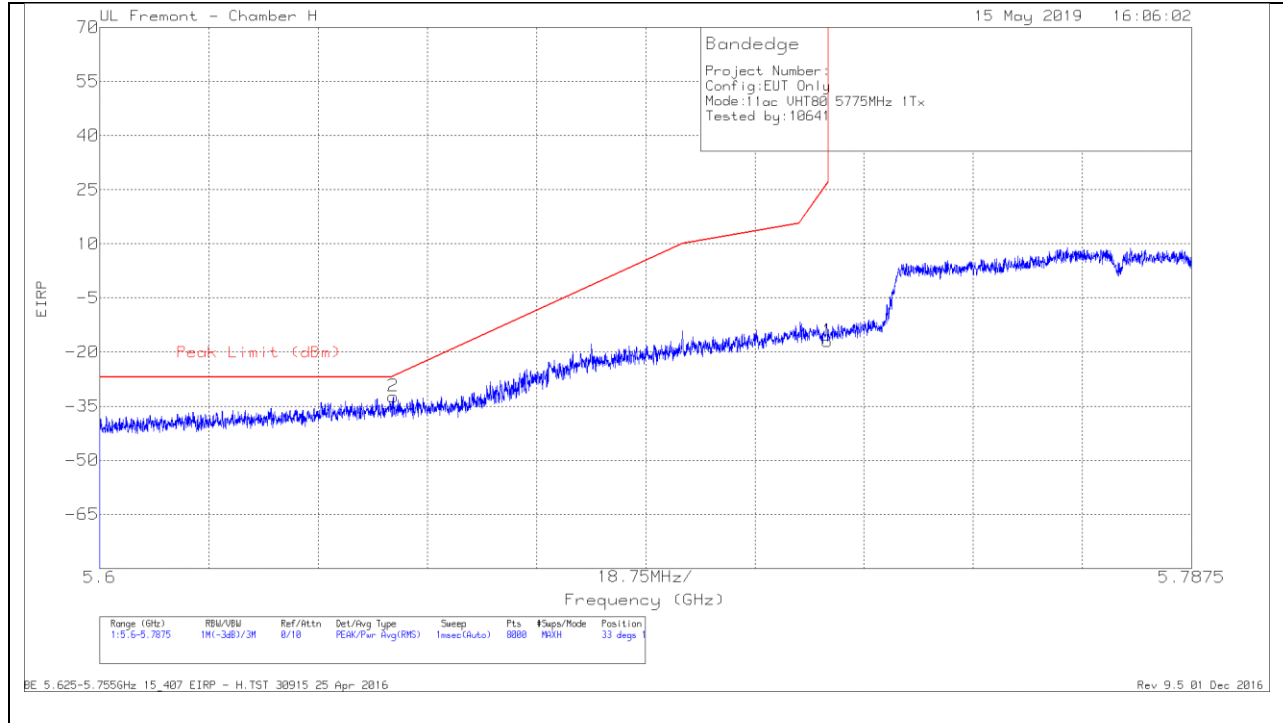

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-58.4	Pk	34.9	-20.6	11.8	-32.3	-26.71	-5.59	33	149	H
1	5.725	-43.16	Pk	35.1	-20.7	11.8	-16.96	26.96	-43.92	33	149	H


Pk - Peak detector

VERTICAL RESULT

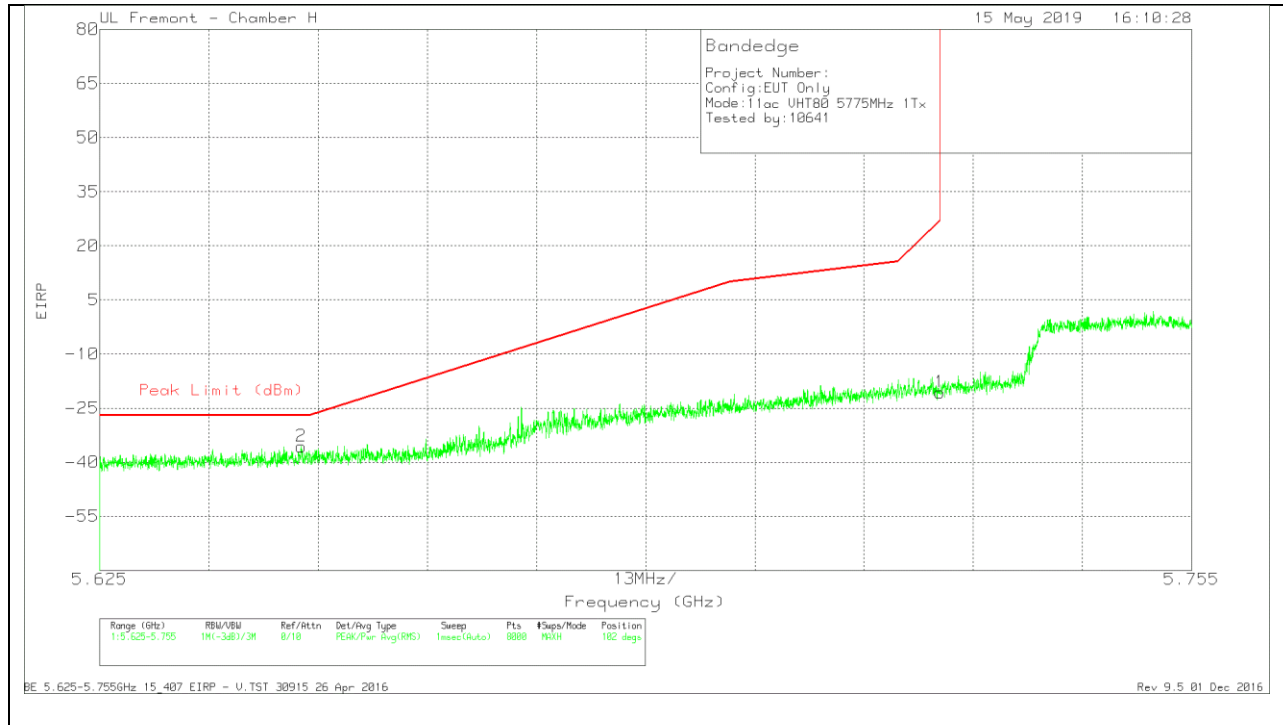

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-61.73	Pk	34.9	-20.6	11.8	-35.63	-27	-8.63	102	339	V
1	5.725	-46.83	Pk	35.1	-20.7	11.8	-20.63	27	-47.63	102	339	V


Pk - Peak detector

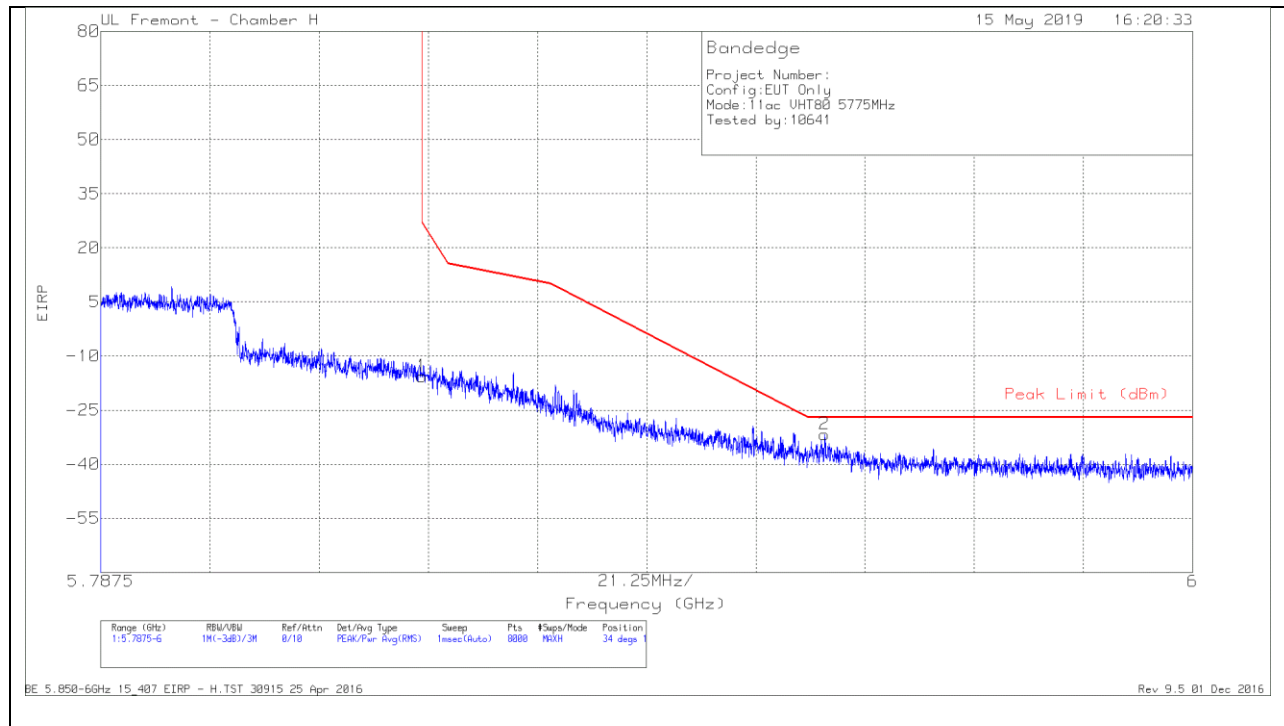BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.53	Pk	35.5	-20.4	11.8	-15.63	26.98	-42.61	34	132	H
2	5.928	-58.99	Pk	35.6	-20.1	11.8	-31.69	-27	-4.69	34	132	H

Pk - Peak detector

VERTICAL RESULT

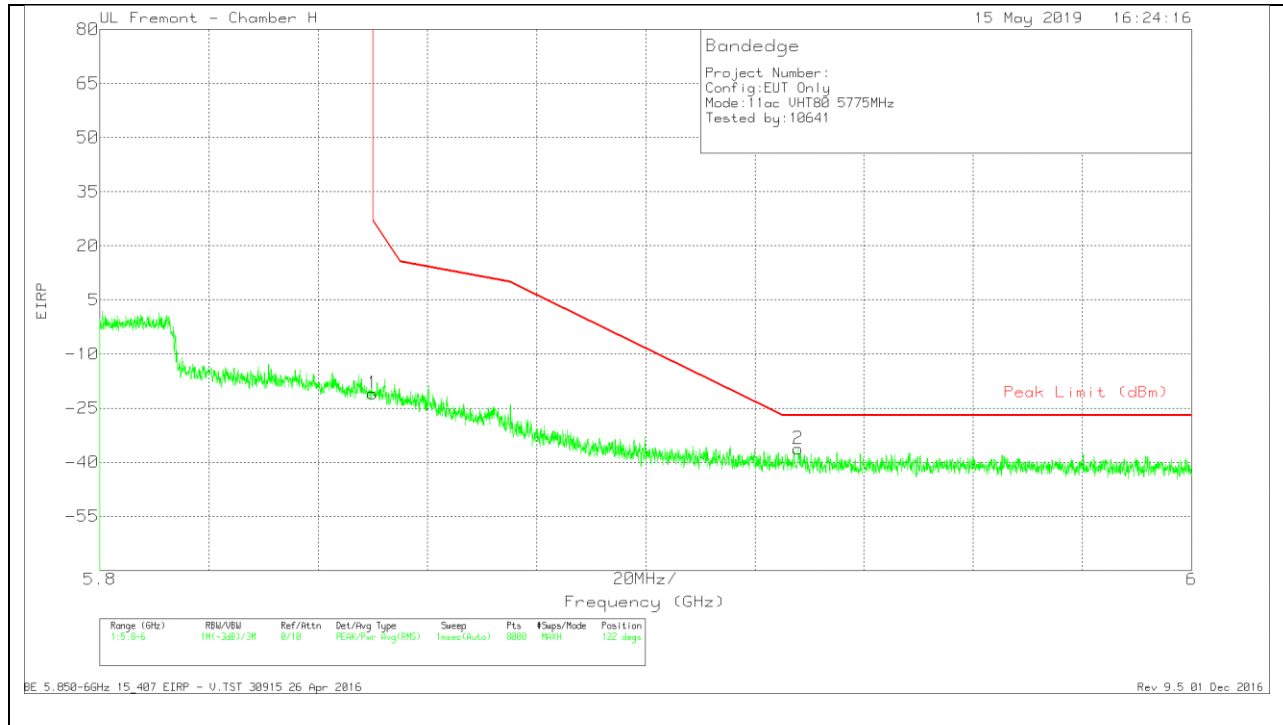


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.78	Pk	35.5	-20.4	11.8	-20.88	26.99	-47.87	122	362	V
2	5.928	-63.52	Pk	35.6	-20.1	11.8	-36.22	-27	-9.22	122	362	V

Pk - Peak detector

1TX Antenna 5 MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

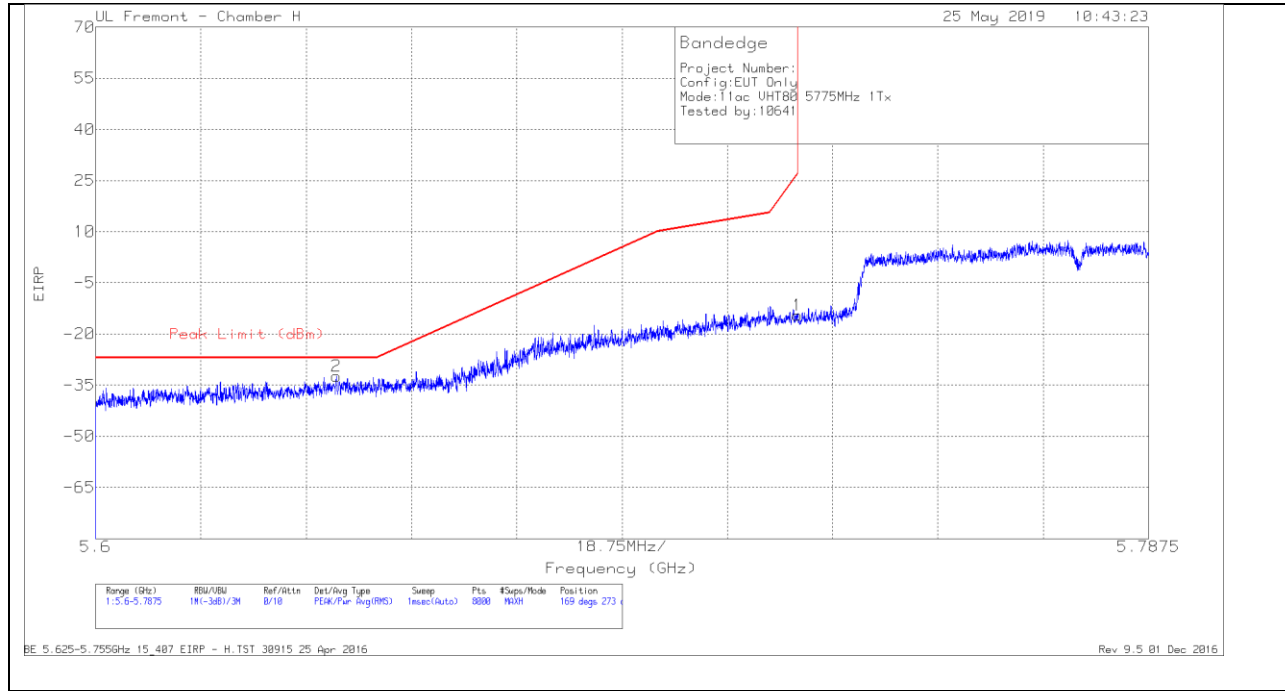

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-58.61	Pk	35	-20.6	11.8	-32.41	-27	-5.41	169	273	H
1	5.725	-40.71	Pk	35.1	-20.7	11.8	-14.51	26.96	-41.47	169	273	H

Pk - Peak detector

VERTICAL RESULT

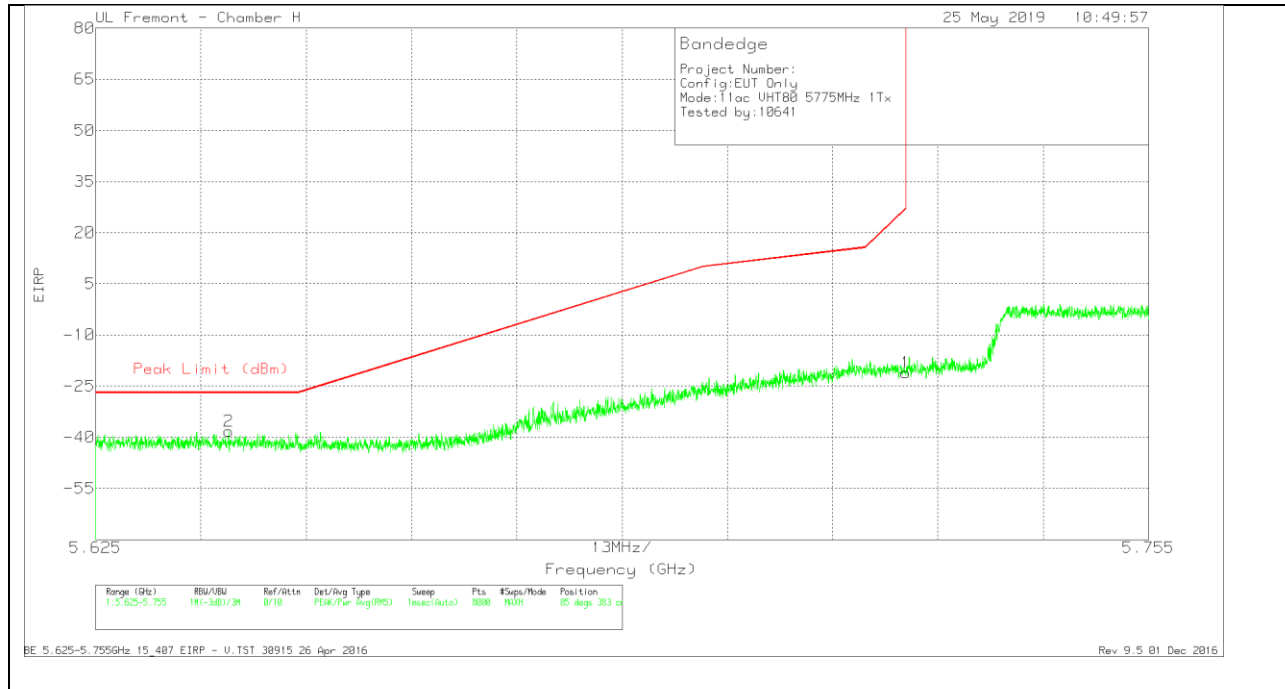


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.641	-64.49	Pk	35	-20.6	11.8	-38.29	-27	-11.29	85	383	V
1	5.725	-47.23	Pk	35.1	-20.7	11.8	-21.03	27	-48.03	85	383	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

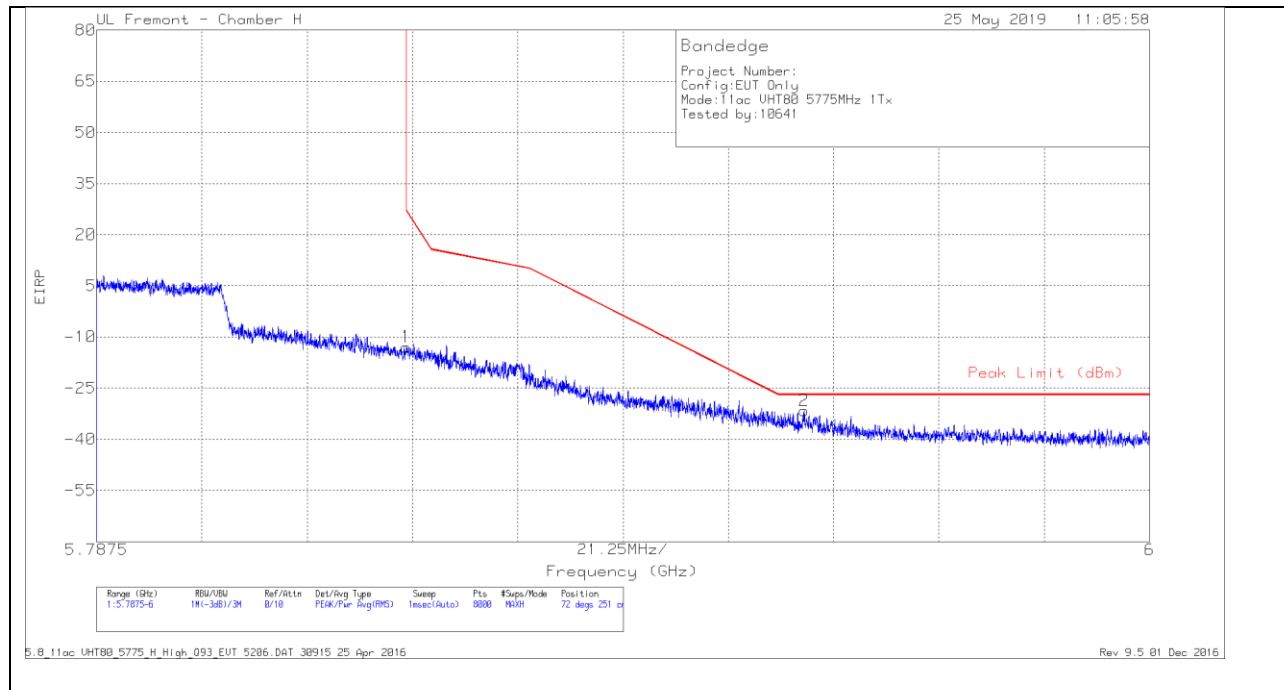

Marker	Frequenc y (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-39.79	Pk	35.5	-20.4	11.8	-12.89	26.98	-39.87	72	251	H
2	5.93	-58.81	Pk	35.6	-20.2	11.8	-31.61	-27	-4.61	72	251	H


Pk - Peak detector

VERTICAL RESULT

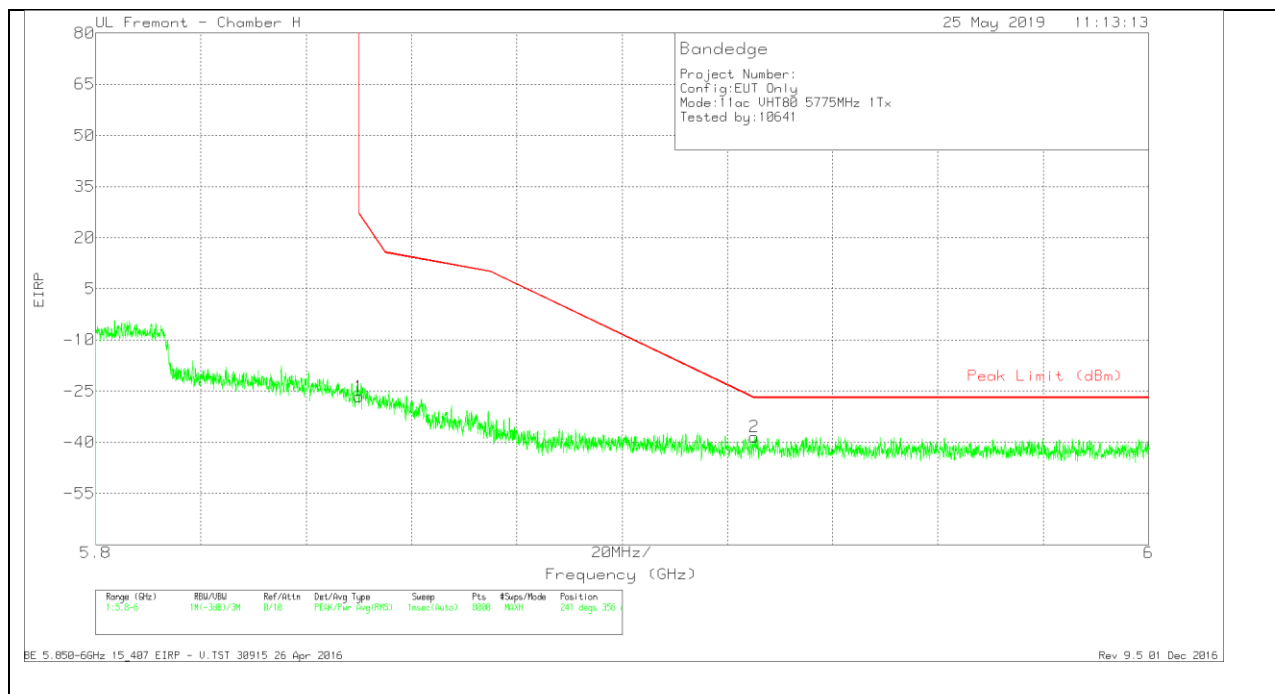

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cb1/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.59	Pk	35.5	-20.4	11.8	-26.69	26.99	-53.68	241	356	V
2	5.925	-65.66	Pk	35.6	-20.2	11.8	-38.46	-27	-11.46	241	356	V


Pk - Peak detector

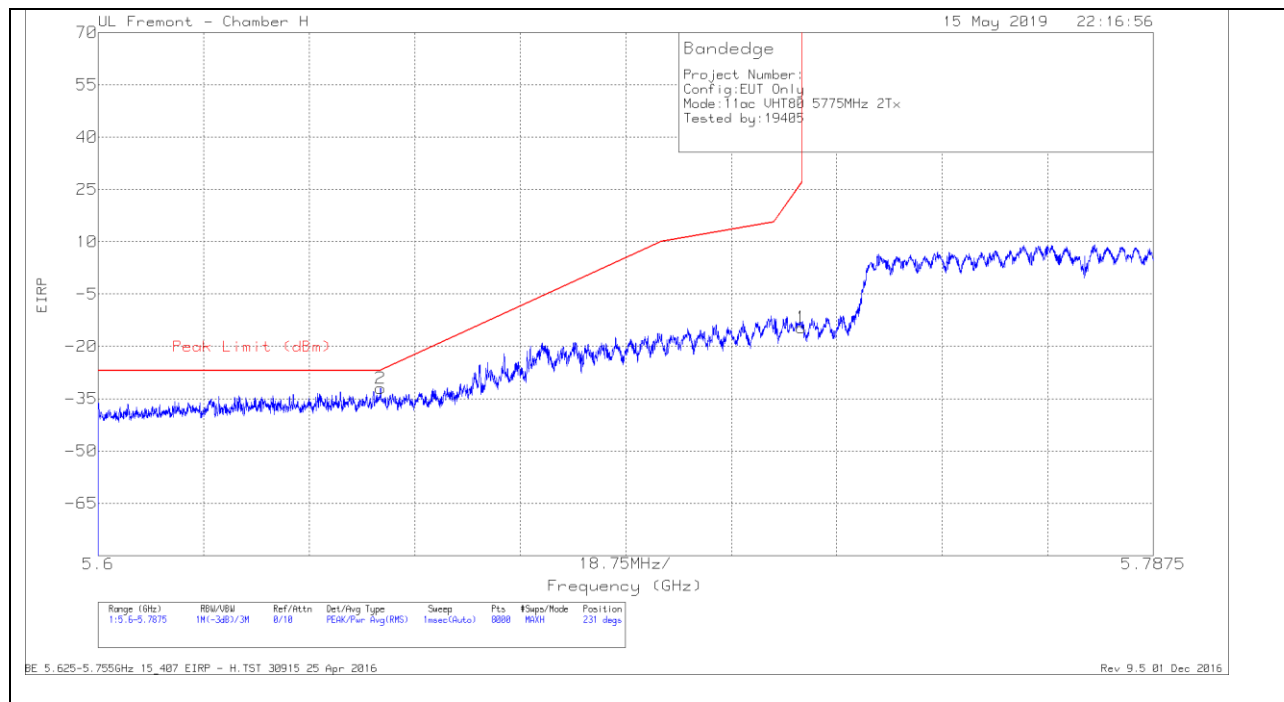2TX Antenna 4 + Antenna 5 CDD MODE**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-58.14	Pk	34.9	-20.6	11.8	-32.04	-26.88	-5.16	231	255	H
1	5.725	-40.87	Pk	35.1	-20.7	11.8	-14.67	26.96	-41.63	231	255	H


Pk - Peak detector

VERTICAL RESULT

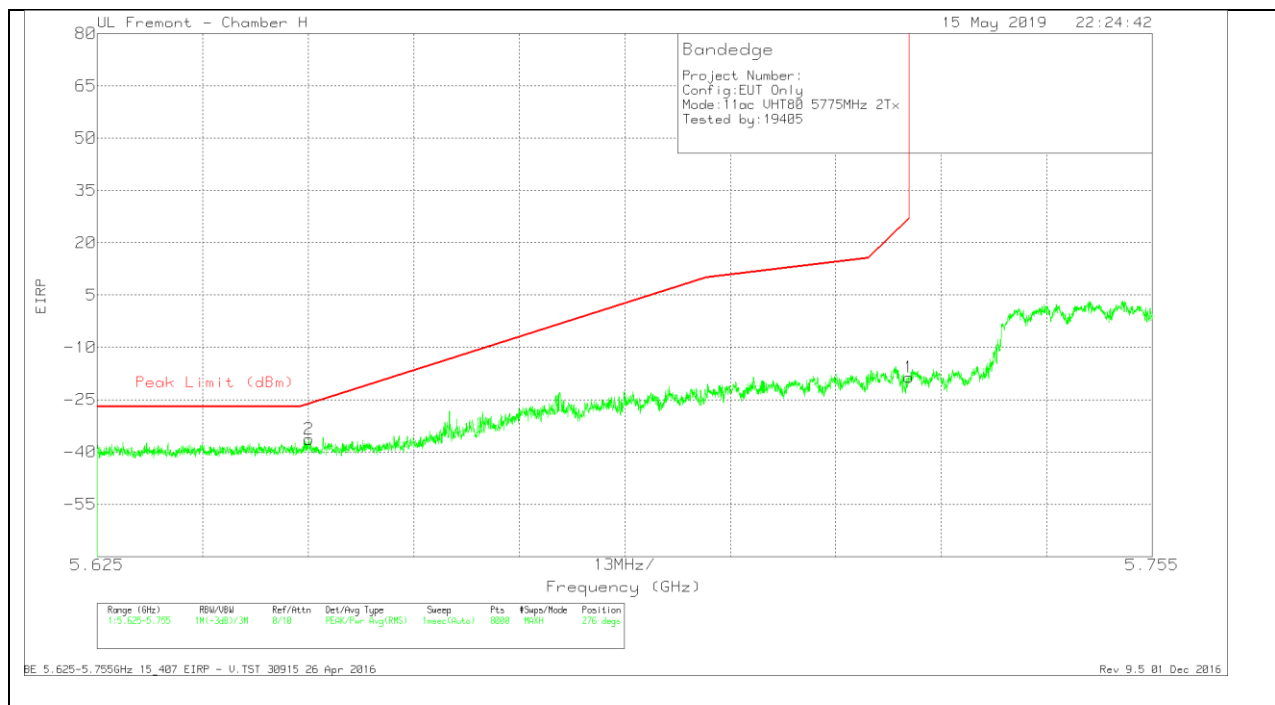

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.651	-62.44	Pk	34.9	-20.6	11.8	-36.34	-26.21	-10.13	276	324	V
1	5.725	-44.8	Pk	35.1	-20.7	11.8	-18.6	27	-45.6	276	324	V


Pk - Peak detector

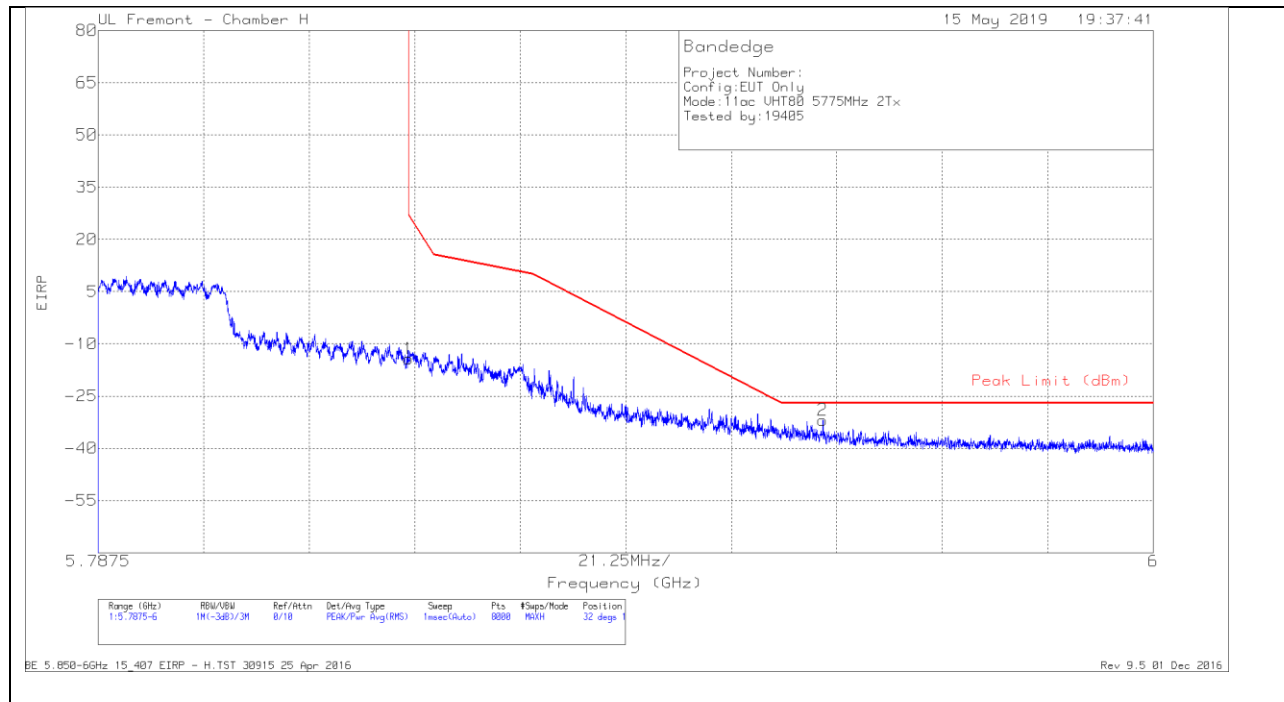BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41.17	Pk	35.5	-20.4	11.8	-14.27	26.98	-41.25	32	160	H
2	5.933	-59.15	Pk	35.6	-20.2	11.8	-31.95	-27	-4.95	32	160	H


Pk - Peak detector

VERTICAL RESULT

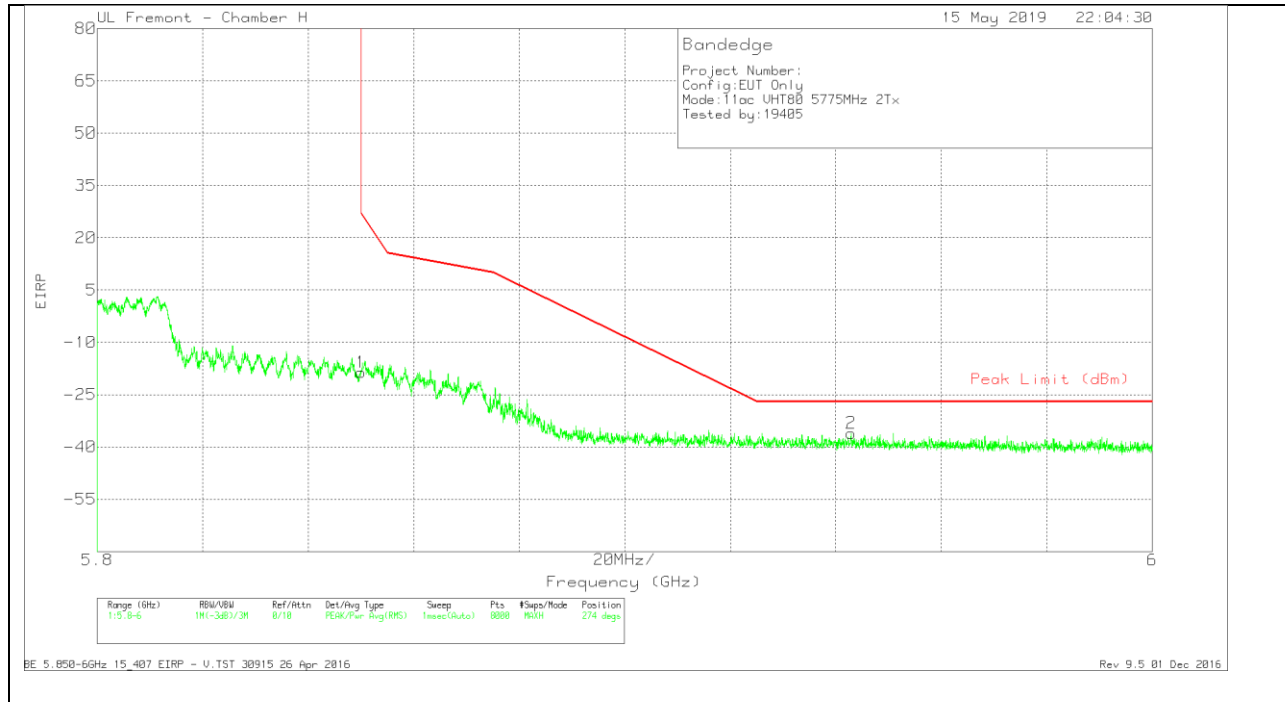

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.51	Pk	35.5	-20.4	11.8	-18.61	26.99	-45.6	274	381	V
2	5.943	-63.36	Pk	35.6	-20.1	11.8	-36.06	-27	-9.06	274	381	V


Pk - Peak detector

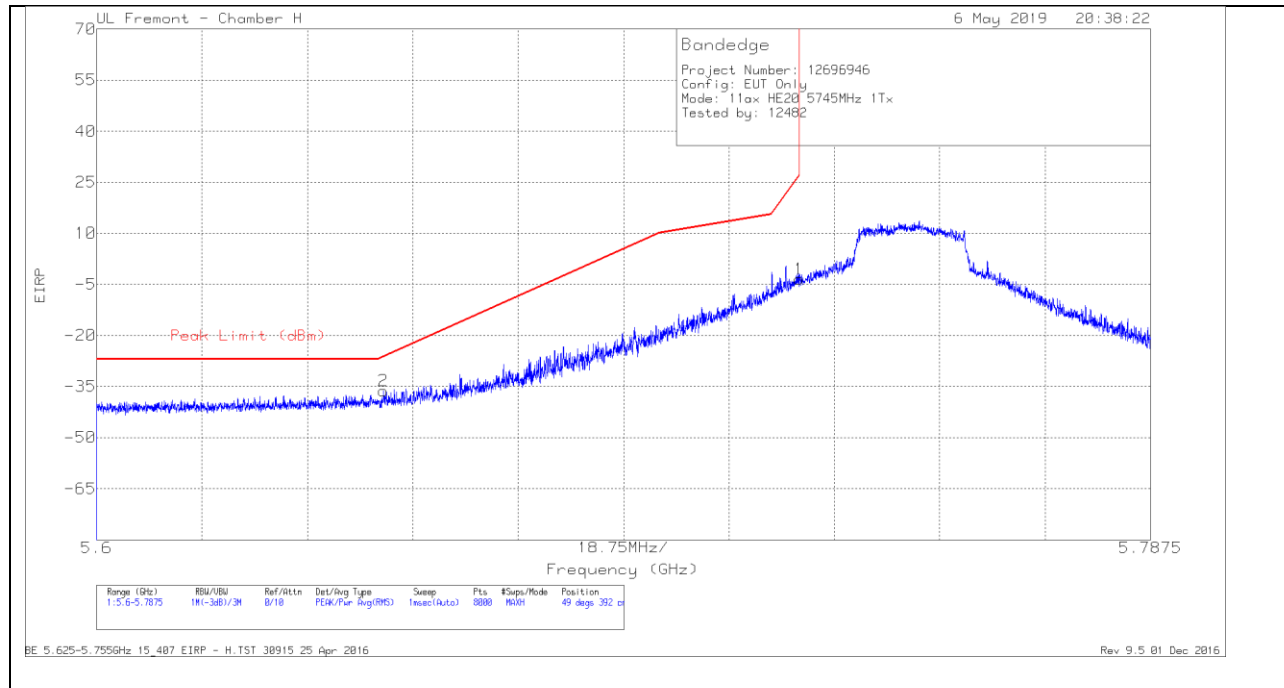1.1.22. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8 GHz BAND**1TX Antenna 4 MODE – 242 Tones, RU Index 61****BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.651	-62.26	Pk	34.9	-20.6	11.8	-36.16	-26.24	-9.92	49	392	H
1	5.725	-29.62	Pk	35.1	-20.7	11.8	-3.42	26.96	-30.38	49	392	H


Pk - Peak detector

VERTICAL RESULT

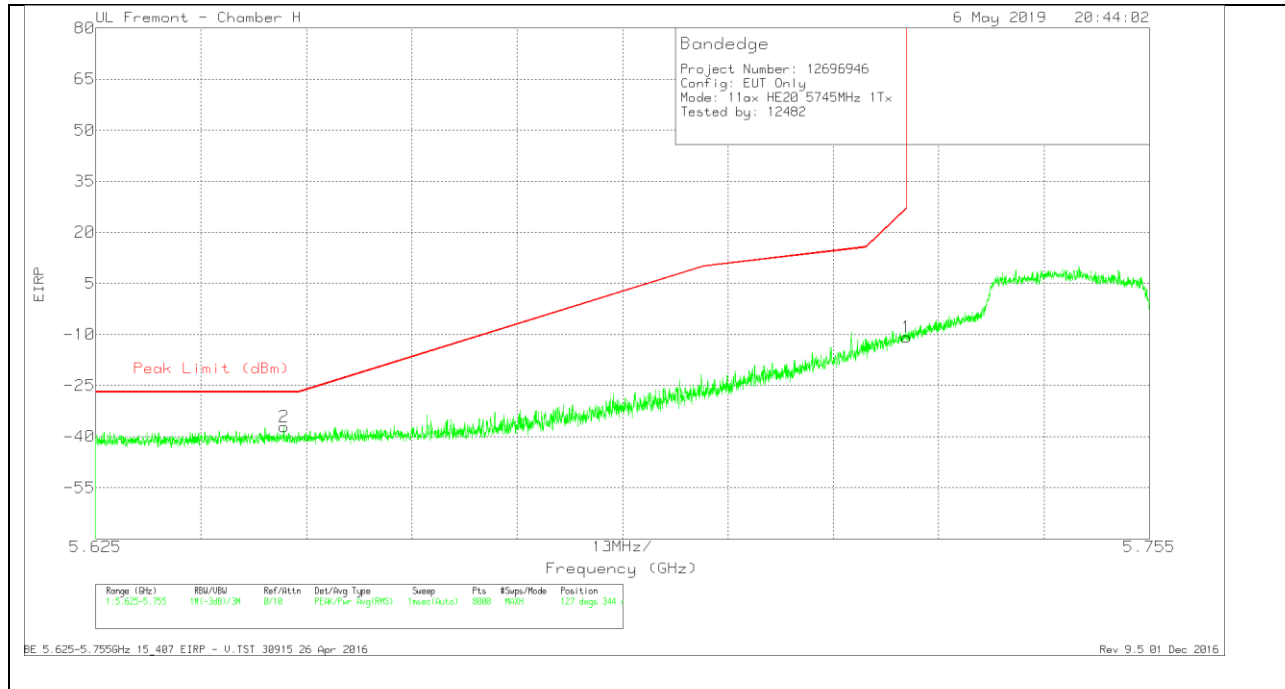

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-63.29	Pk	34.9	-20.6	11.8	-37.19	-27	-10.19	127	344	V
1	5.725	-37	Pk	35.1	-20.7	11.8	-10.8	27	-37.8	127	344	V


Pk - Peak detector

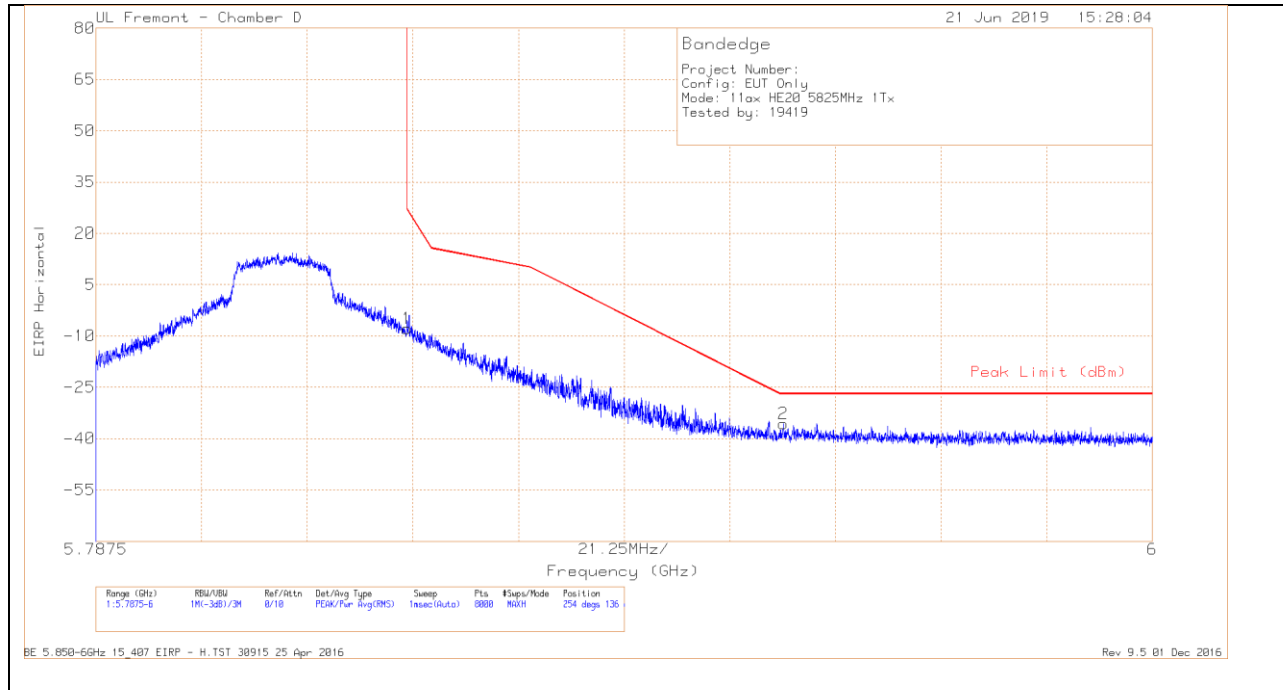BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.89	Pk	34.7	-17.4	11.8	-7.79	26.98	-34.77	254	136	H
2	5.926	-65.09	Pk	34.9	-17.3	11.8	-35.69	-27	-8.69	254	136	H


Pk - Peak detector

VERTICAL RESULT

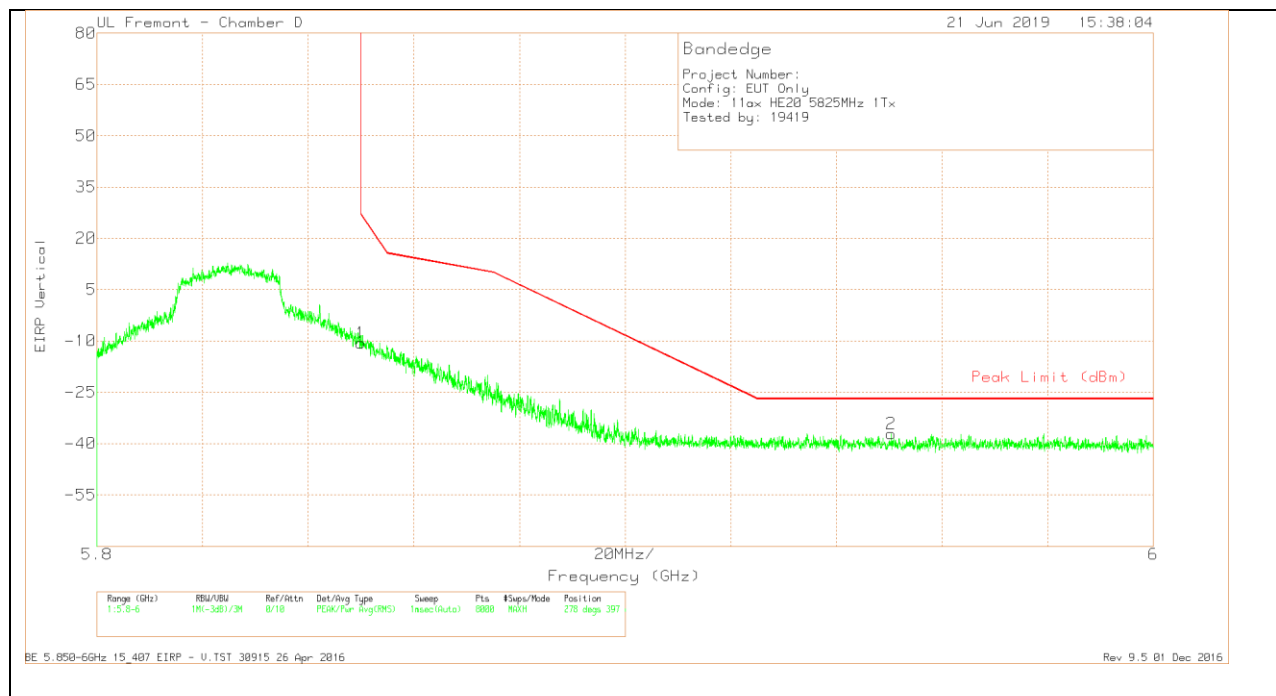

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-39.65	Pk	34.7	-17.4	11.8	-10.55	26.99	-37.54	278	397	V
2	5.95	-66.43	Pk	34.9	-17.3	11.8	-37.03	-27	-10.03	278	397	V


Pk - Peak detector

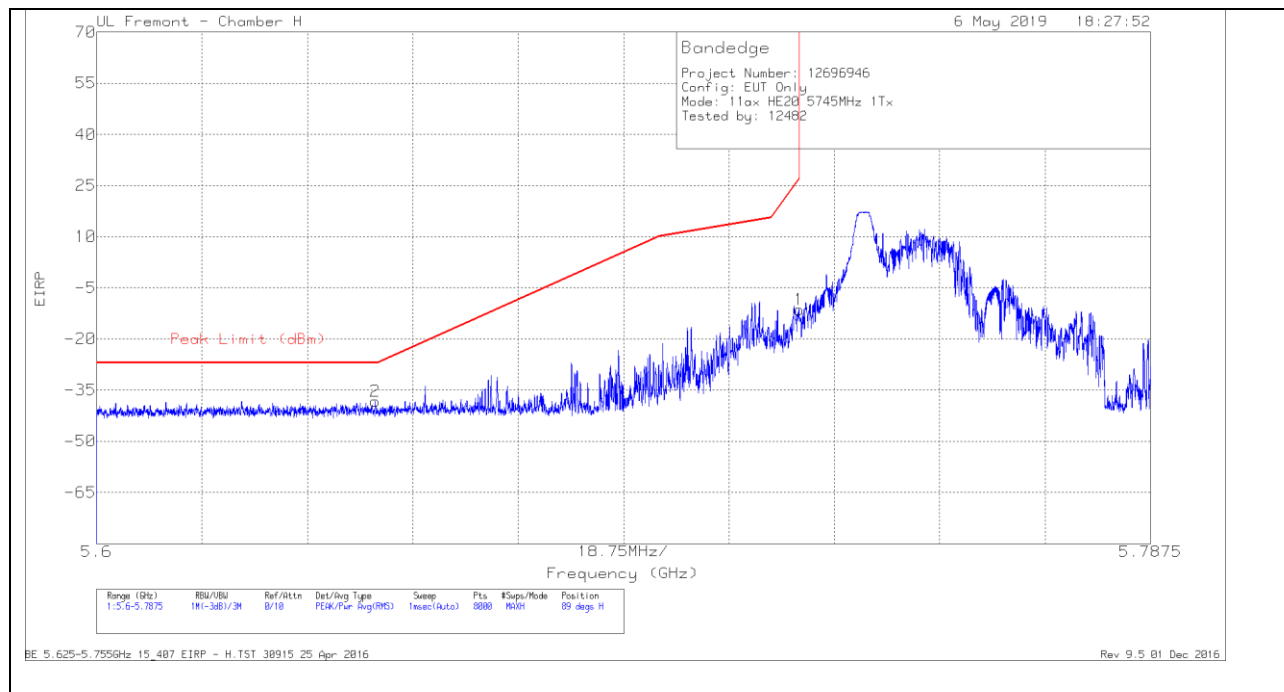1TX Antenna 4 MODE – 26 Tones, RU Index 0**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-64.35	Pk	34.9	-20.6	11.8	-38.25	-27	-11.25	89	254	H
1	5.725	-37.52	Pk	35.1	-20.7	11.8	-11.32	26.96	-38.28	89	254	H


Pk - Peak detector

VERTICAL RESULT

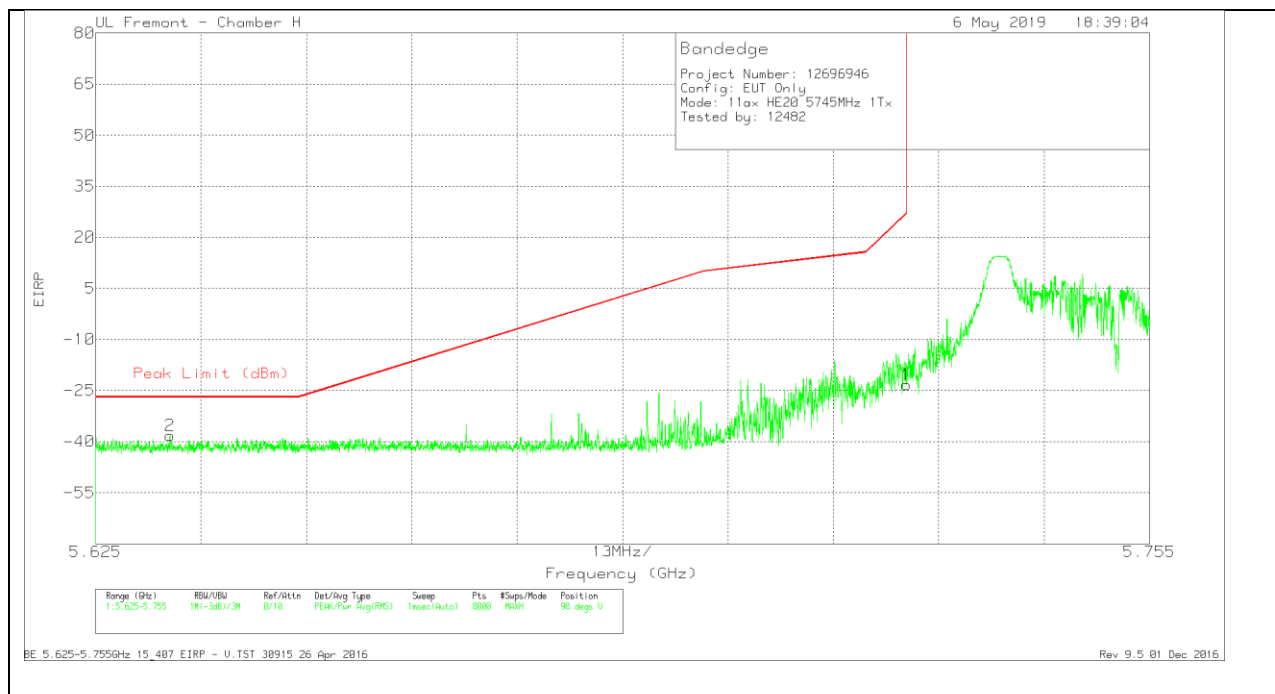

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.634	-64.19	Pk	34.8	-20.7	11.8	-38.29	-27	-11.29	98	396	V
1	5.725	-49.57	Pk	35.1	-20.7	11.8	-23.37	27	-50.37	98	396	V


Pk - Peak detector

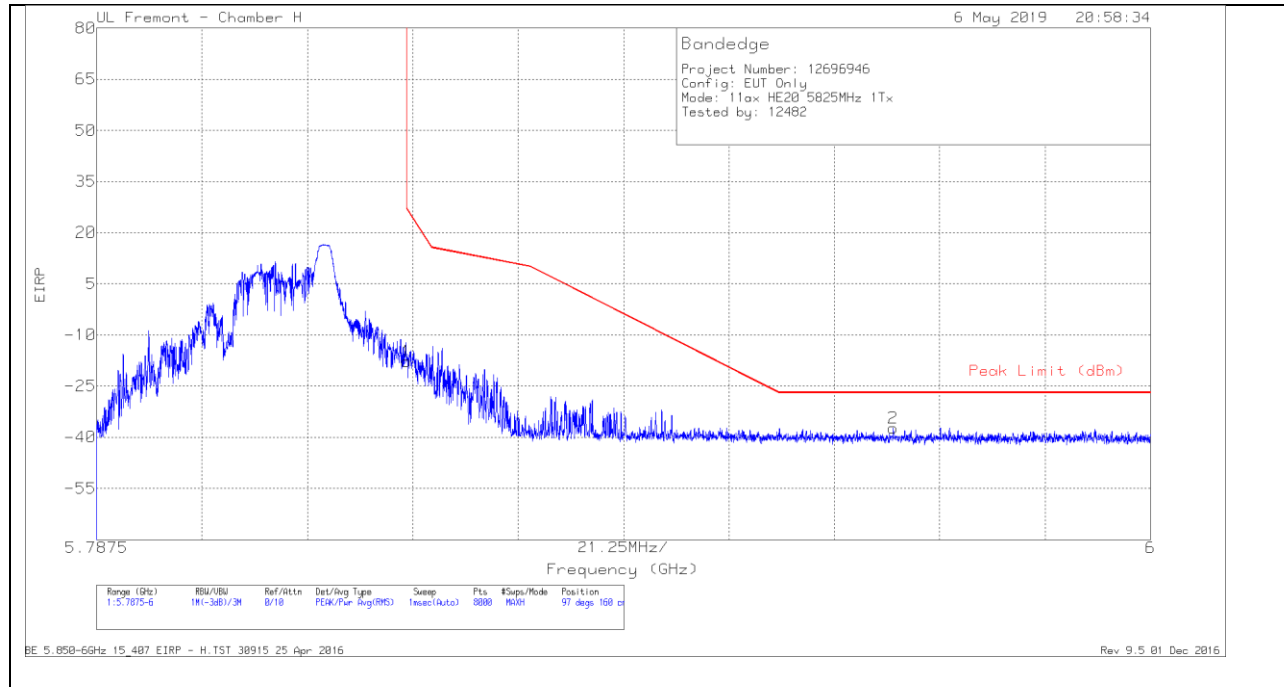1TX Antenna 4 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.67	Pk	35.5	-20.4	11.8	-17.77	26.98	-44.75	97	160	H
2	5.948	-64.55	Pk	35.6	-20.1	11.8	-37.25	-27	-10.25	97	160	H


Pk - Peak detector

VERTICAL RESULT

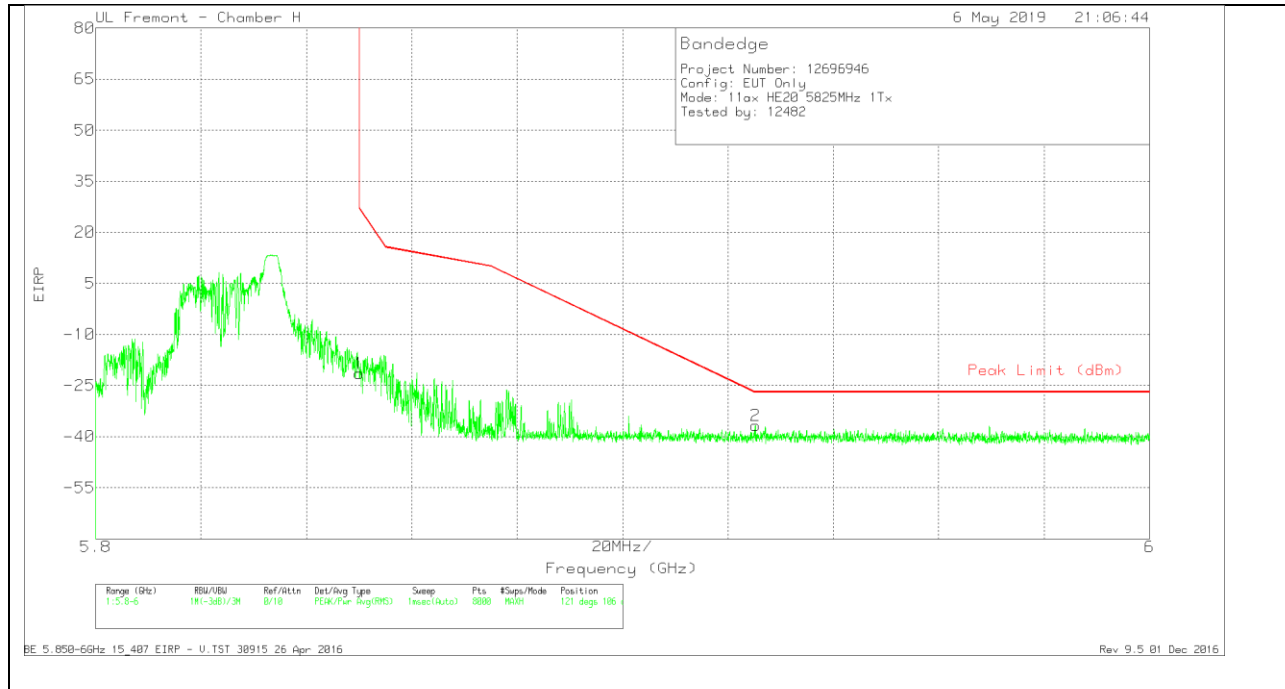

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.38	Pk	35.5	-20.4	11.8	-21.48	26.99	-48.47	121	106	V
2	5.925	-63.93	Pk	35.6	-20.2	11.8	-36.73	-27	-9.73	121	106	V


Pk - Peak detector

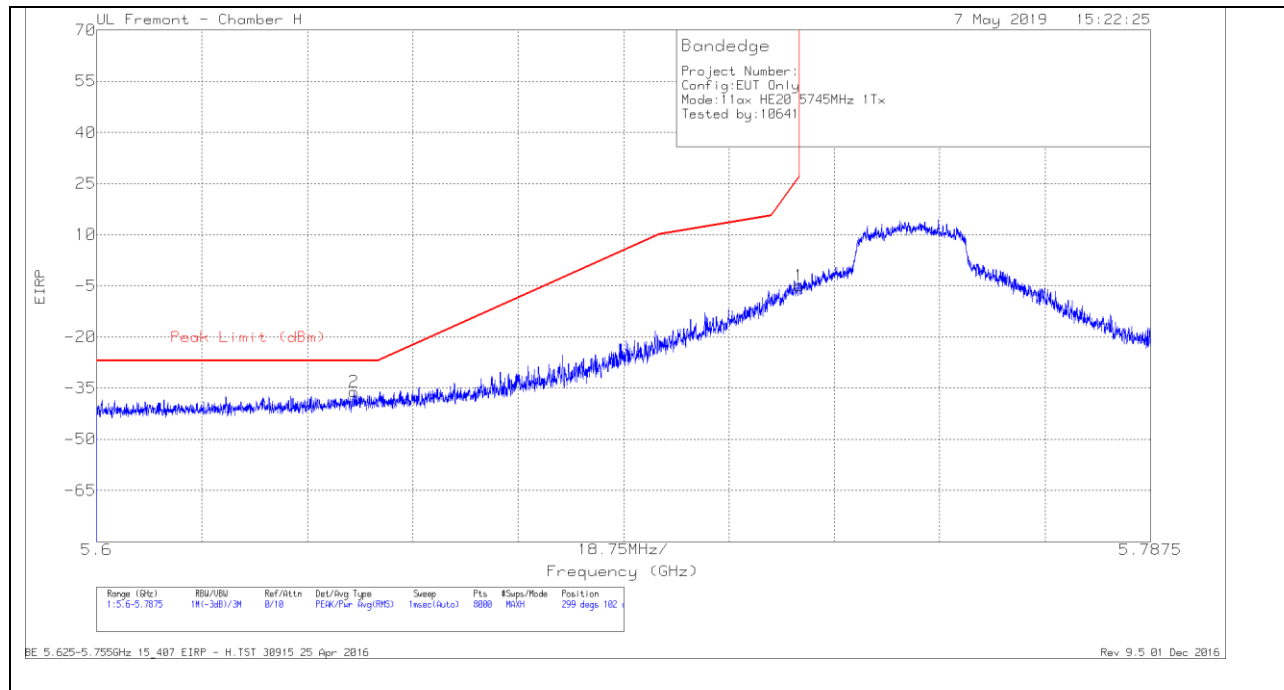1TX Antenna 5 MODE – 242 Tones, RU Index 61**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cb/Ftr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646	-62.33	Pk	35	-20.6	11.8	-36.13	-27	-9.13	299	102	H
1	5.725	-31.05	Pk	35.1	-20.7	11.8	-4.85	26.96	-31.81	299	102	H


Pk - Peak detector

VERTICAL RESULT

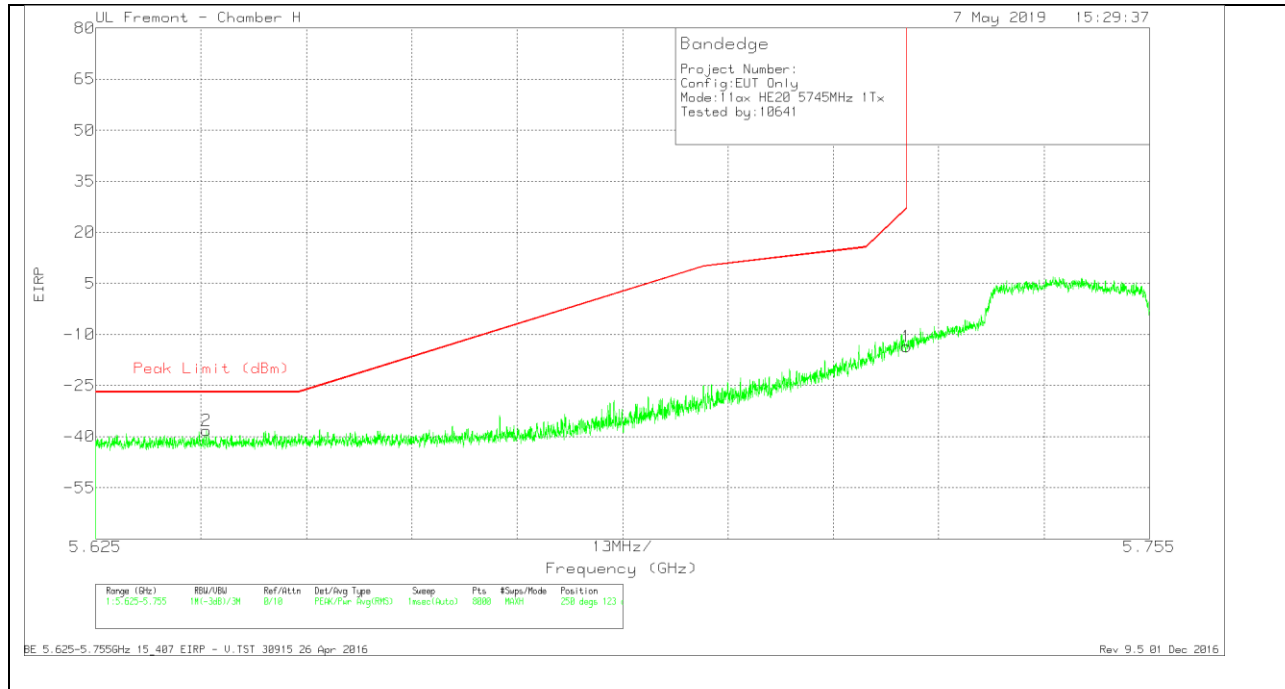

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.639	-64.29	Pk	34.9	-20.6	11.8	-38.19	-27	-11.19	250	123	V
1	5.725	-39.78	Pk	35.1	-20.7	11.8	-13.58	27	-40.58	250	123	V


Pk - Peak detector

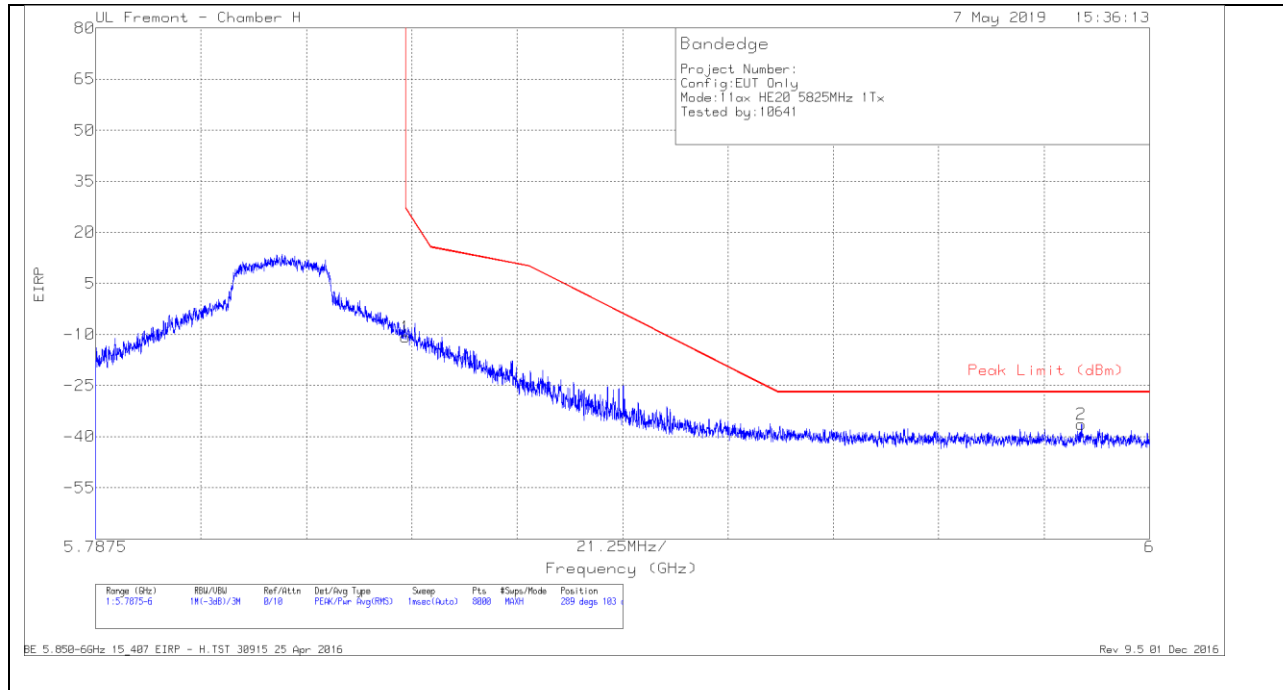BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.71	Pk	35.5	-20.4	11.8	-10.81	26.98	-37.79	289	103	H
2	5.986	-63.89	Pk	35.6	-19.9	11.8	-36.39	-27	-9.39	289	103	H


Pk - Peak detector

VERTICAL RESULT

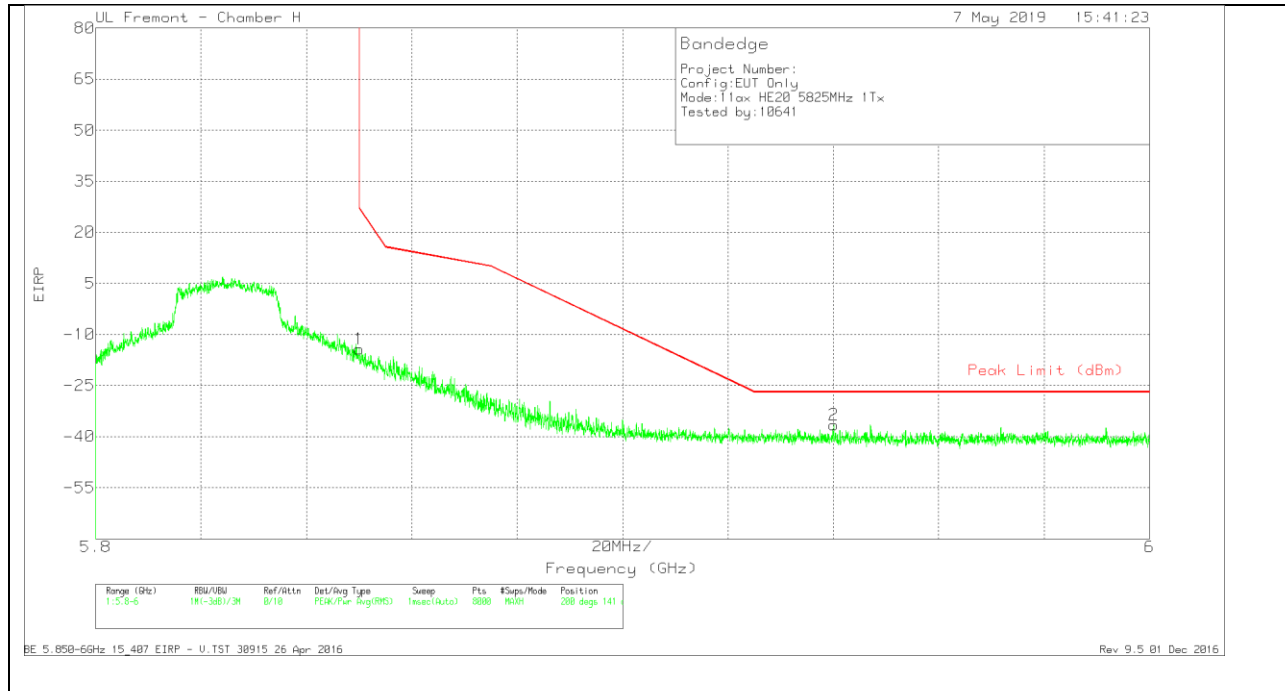

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41.12	Pk	35.5	-20.4	11.8	-14.22	26.99	-41.21	200	141	V
2	5.94	-63.82	Pk	35.6	-20.1	11.8	-36.52	-27	-9.52	200	141	V


Pk - Peak detector

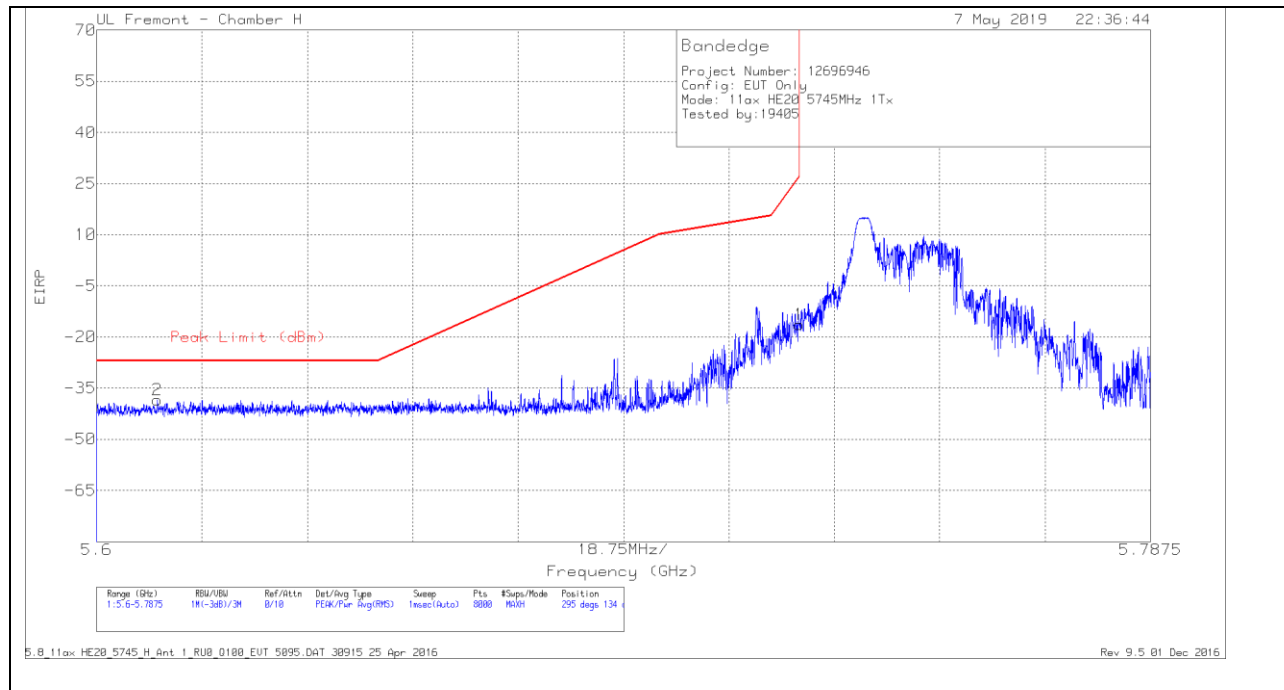1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.611	-64.39	Pk	34.9	-20.7	11.8	-38.39	-27	-11.39	295	134	H
1	5.725	-42.57	Pk	35.1	-20.7	11.8	-16.37	26.96	-43.33	295	134	H


Pk - Peak detector

VERTICAL RESULT

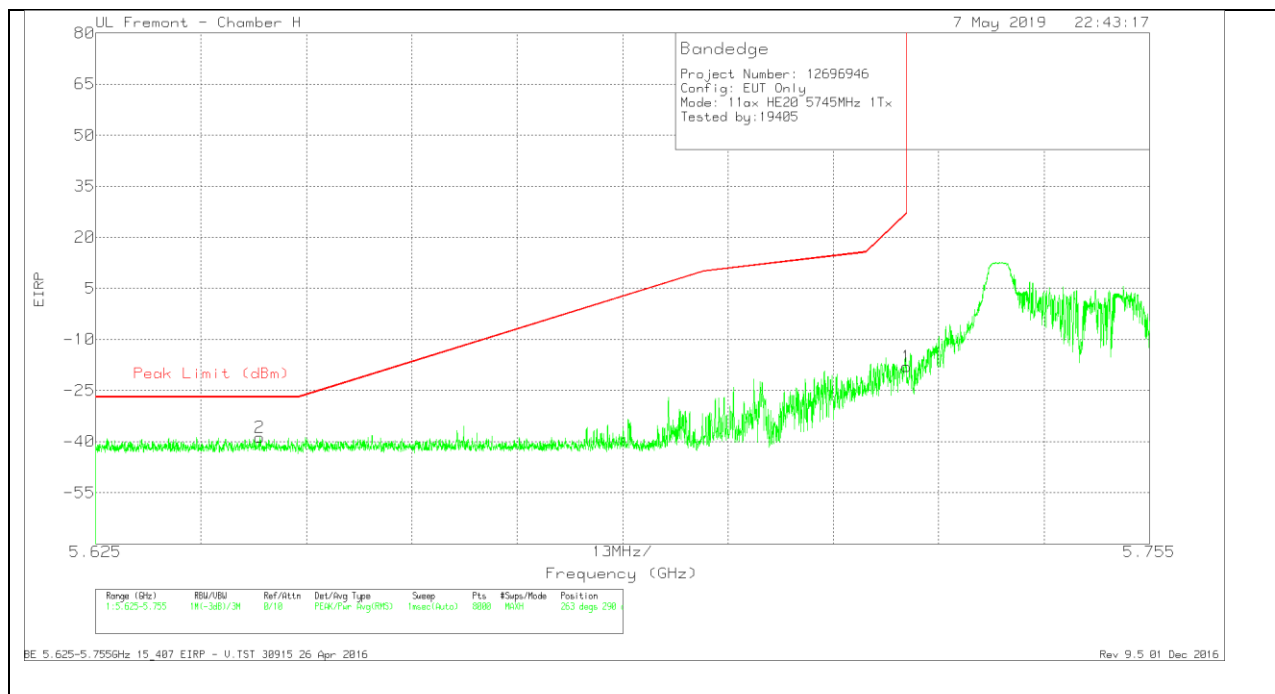

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645	-64.94	Pk	35	-20.6	11.8	-38.74	-27	-11.74	263	290	V
1	5.725	-44.16	Pk	35.1	-20.7	11.8	-17.96	27	-44.96	263	290	V


Pk - Peak detector

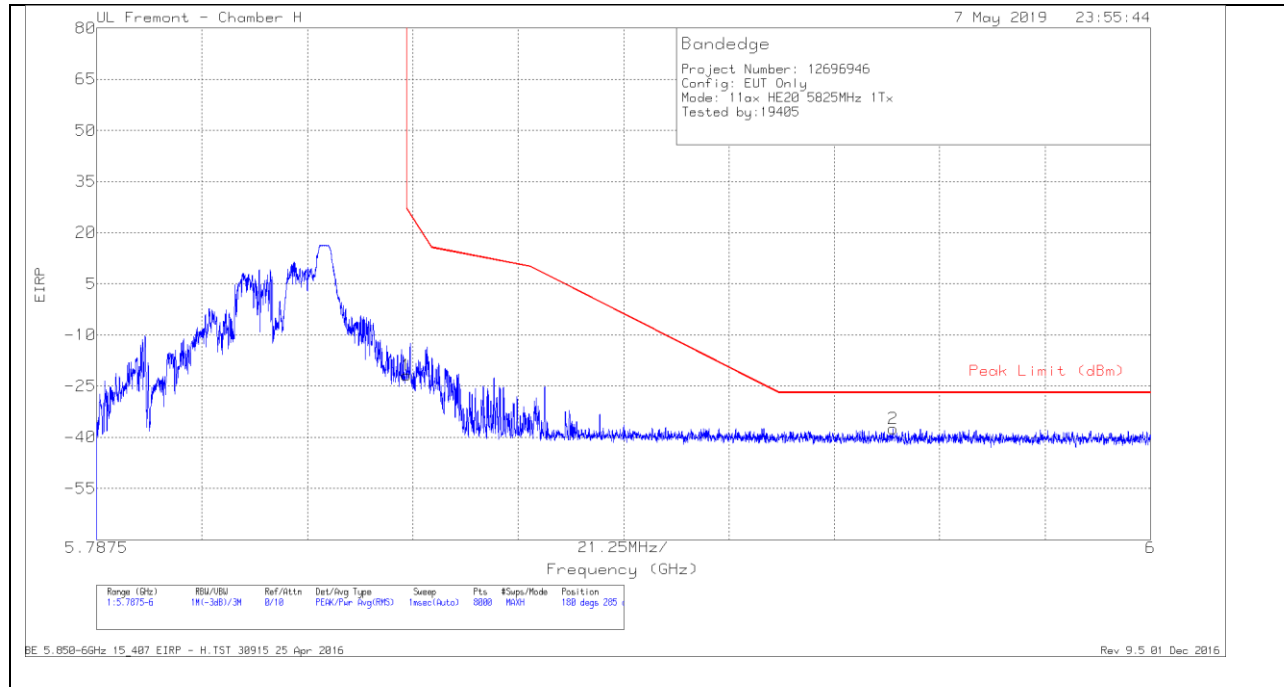1TX Antenna 5 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.75	Pk	35.5	-20.4	11.8	-21.85	26.98	-48.83	180	285	H
2	5.948	-64.79	Pk	35.6	-20.1	11.8	-37.49	-27	-10.49	180	285	H


Pk - Peak detector

VERTICAL RESULT

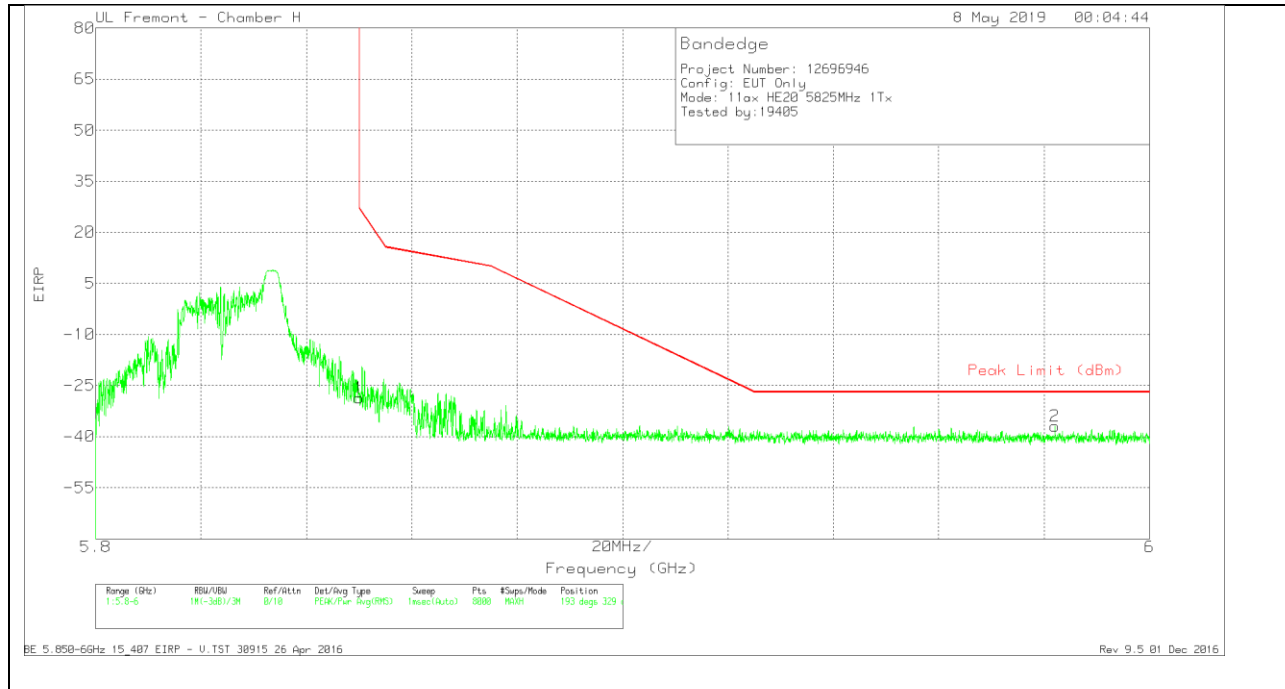

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.56	Pk	35.5	-20.4	11.8	-28.66	26.99	-55.65	193	329	V
2	5.982	-64.25	Pk	35.6	-20	11.8	-36.85	-27	-9.85	193	329	V


Pk - Peak detector

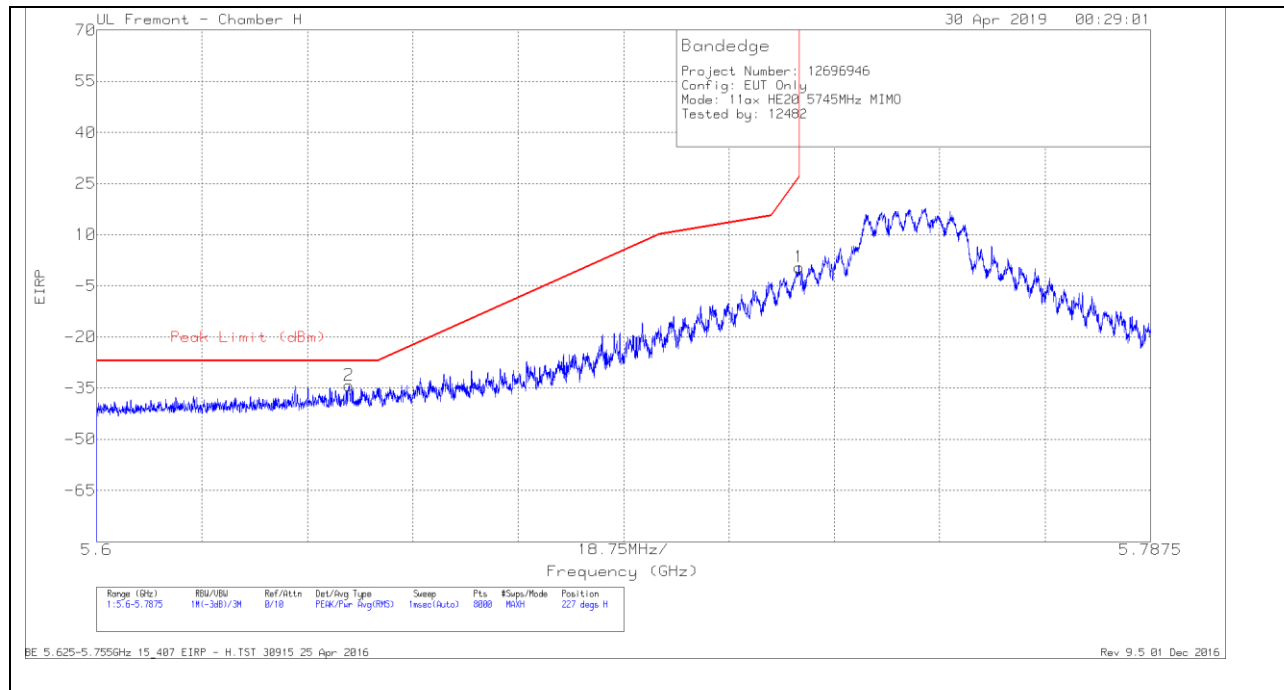BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645	-60.33	Pk	35	-20.6	11.8	-34.13	-27	-7.13	227	282	H
1	5.725	-25.69	Pk	35.1	-20.7	11.8	.51	26.96	-26.45	227	282	H


Pk - Peak detector

VERTICAL RESULT

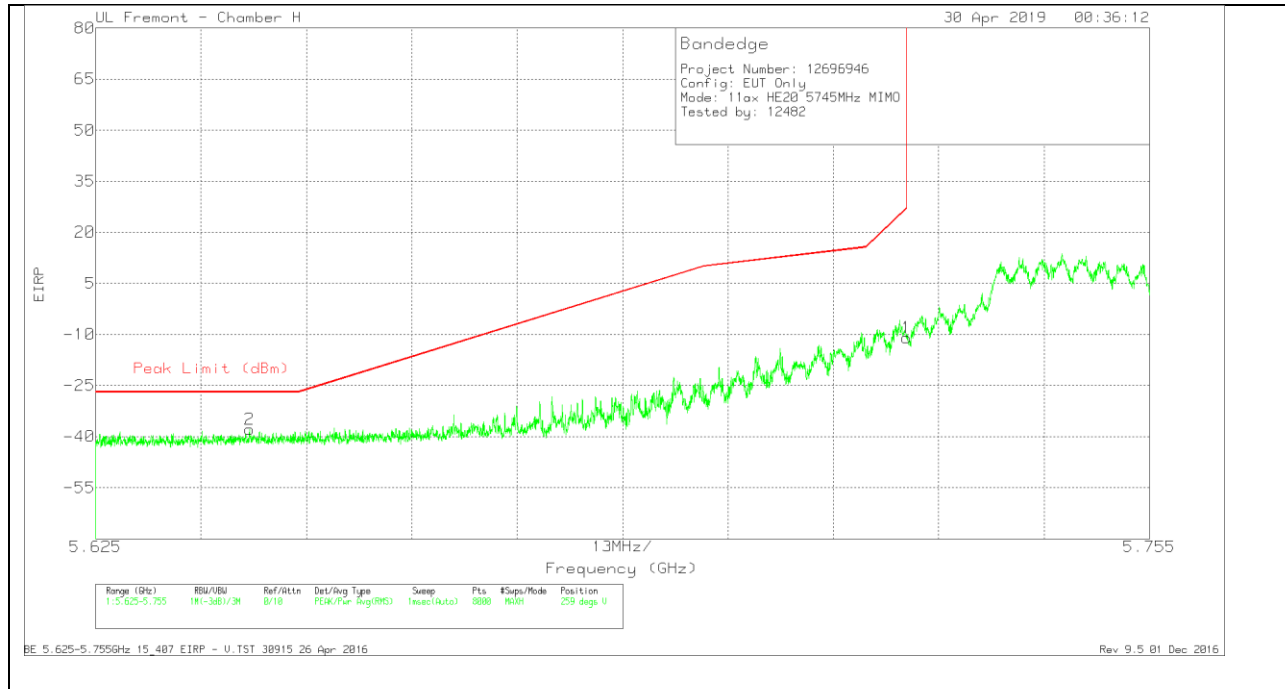

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.644	-64.09	Pk	35	-20.6	11.8	-37.89	-27	-10.89	259	101	V
1	5.725	-37.11	Pk	35.1	-20.7	11.8	-10.91	27	-37.91	259	101	V

Pk - Peak detector

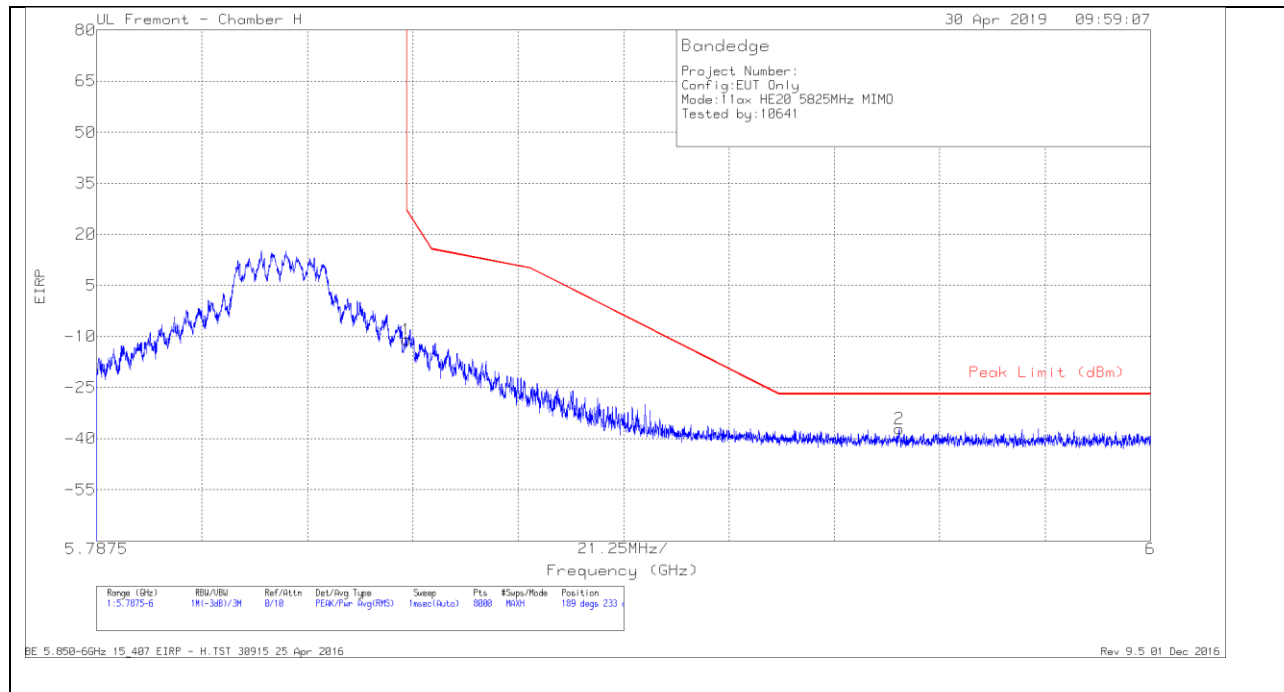BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.84	Pk	35.5	-20.4	11.8	-10.94	26.98	-37.92	189	233	H
2	5.949	-64.41	Pk	35.6	-20.1	11.8	-37.11	-27	-10.11	189	233	H

Pk - Peak detector