



HAC T-COIL SIGNAL TEST REPORT

**FCC 47 CFR § 20.19
ANSI C63.19-2011**

For
SMARTPHONE

**FCC ID: BCG-E3501A
Model Name: A2296**

**Report Number: 13018918-S2V2
Issue Date: 3/25/2020**

Prepared for
**APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	1/29/2020	Initial Issue	--
V2	3/25/2020	Section 8.1: updated typo.	Devin Chang

Table of Contents

1. Attestation of Test Results	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	6
4.1. <i>Measuring Instrument Calibration</i>	6
4.2. <i>Measurement Uncertainty</i>	7
5. Test Procedures for all Technologies	8
5.1. <i>General Procedures C63.19-2011, §7</i>	8
5.2. <i>VoWiFi – For PAG REUSE</i>	9
5.3. <i>Over the Top (OTT) – For PAG REUSE</i>	10
6. Audio Level and Gain Measurements	12
6.1. <i>GSM/W-CDMA and VoLTE</i>	12
6.2. <i>CDMA (1xRTT)</i>	12
6.3. <i>VoWi-Fi – For PAG REUSE</i>	12
6.4. <i>Over the Top (OTT) – For PAG REUSE</i>	13
7. T-coil Measurement Criteria	14
7.1. <i>Frequency Response</i>	14
7.2. <i>Signal to Noise</i>	15
8. Device Under Test	16
8.1. <i>Air Interfaces and Operating Mode</i>	16
9. Investigations (Antenna, Codec, & Air Interface)	17
9.1. <i>CMRS</i>	17
9.1.1. <i>Antenna Investigation</i>	17
9.1.2. <i>Codec Investigation</i>	18
9.1.3. <i>Air Interface Investigation</i>	19
9.1.4. <i>VoWi-Fi Codec Investigation</i>	22
9.1.5. <i>VoWi-Fi Air Interface Investigation</i>	23
9.2. <i>OTT Application</i>	25
9.2.1. <i>Antenna Investigation</i>	25
9.2.2. <i>Codec Investigation</i>	26
9.2.3. <i>OTT Air Interface Investigation</i>	27
10. HAC (T-coil) Test Results	32
10.1. <i>CMRS</i>	32

10.2.	<i>OTT Application</i>	35
10.3.	<i>Worst Case T-Coil Test Plot</i>	37
Appendix	38
	<i>Appendix A: T-Coil Setup Photo</i>	38
	<i>Appendix B: T-Coil Test Plots (CMRS)</i>	38
	<i>Appendix C: T-Coil Test Plots (OTT)</i>	38
	<i>Appendix D: T-Coil Probe Certificates</i>	38
	<i>Appendix E: Adjusted Gain Procedure</i>	38

1. Attestation of Test Results

Applicant Name	APPLE, INC.
FCC ID	BCG-E3501A
Model Name	A2296
Applicable Standards	FCC 47 CFR § 20.19 ANSI C63.19-2011
HAC Rating	T4
Date Tested	11/18/2019 to 12/20/2019
Test Results	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By:



Devin Chang
Senior Test Engineer
UL Verification Services Inc.

Prepared By:



Miguel Llamas
Laboratory Technician
UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05
 KDB 285076 D02 T-Coil testing for CMRS IP v03
 KDB 285076 D03 HAC FAQ v01
 TCB workshop updates

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47266 Benicia Street
SAR Lab 7

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ABM Probe	SPEAG	AM1DV3	3083	1/15/2020
Data Acquisition Electronics	SPEAG	DAE4	1540	2/18/2020
Radio Communication Tester	R & S	CMW 500	125236	4/10/2020
DAC	Sound Devices	USBPre 2	HB11173410003	N/A
Support Device	Apple	iMac 14,4	C02NP00JGD92	N/A

4.2. Measurement Uncertainty

Measurement Uncertainty for Audio Band Magnetic Measurement

Error Description	Uncertainty values (±%)	Probe Dist.	Div.	c _i		Std. Unc.	
				ABM1	ABM2	ABM1 (±%)	ABM2 (±%)
Probe Sensitivity							
Reference level	3.0	N	1	1	1	3.0	3.0
AMCC geometry	0.4	R	√3	1	1	0.2	0.2
AMCC current	1.0	R	√3	1	1	0.6	0.6
Probe positioning during calibration	0.1	R	√3	1	1	0.1	0.1
Noise contribution	0.7	R	√3	0.0143	1	0.0	0.4
Frequency slope	5.9	R	√3	0.1	1.00	0.3	3.5
Probe System							
Repeatability / drift	1.0	R	√3	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	√3	1	1	0.4	0.4
Acoustic noise	1.0	R	√3	0.1	1	0.1	0.6
Probe angle	2.3	R	√3	1	1	1.4	1.4
Spectral processing	0.9	R	√3	1	1	0.5	0.5
Integration time	0.6	N	1	1	5	0.6	3.0
Field disturbance	0.2	R	√3	1	1	0.1	0.1
Test Signal							
Reference signal spectral response	0.6	R	√3	0	1	0.0	0.4
Positioning							
Probe positioning	1.9	R	√3	1	1	1.1	1.1
Phantom positioning	0.9	R	√3	1	1	0.5	0.5
EUT positioning	1.9	R	√3	1	1	1.1	1.1
External Contributions							
RF interference	0.0	R	√3	1	0.3	0.0	0.0
Test signal variation	2.0	R	√3	1	1	1.2	1.2
Combined Std. Uncertainty (ABM field)						4.1	6.1
Expanded Std. Uncertainty (%)						8.1	12.3
Notes for table							
1. N - Nomal							
2. R - Rectangular							
3. Div. - Divisor used to obtain standard uncertainty							

5. Test Procedures for all Technologies

5.1. General Procedures C63.19-2011, §7

ANSI C63.19-2011, §7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1¹ and ABM2². These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at $f = 1$ kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.⁴⁶ The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

¹ **Audio Band Magnetic signal - desired (ABM1):** Measured quantity of the desired magnetic signal

² **Audio Band Magnetic signal - undesired (ABM2):** Measured quantity of the undesired magnetic signal, such as interference from battery current and similar non-signal elements.


- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at f_i) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input–output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

- f. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- g. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

Test Setup Diagram

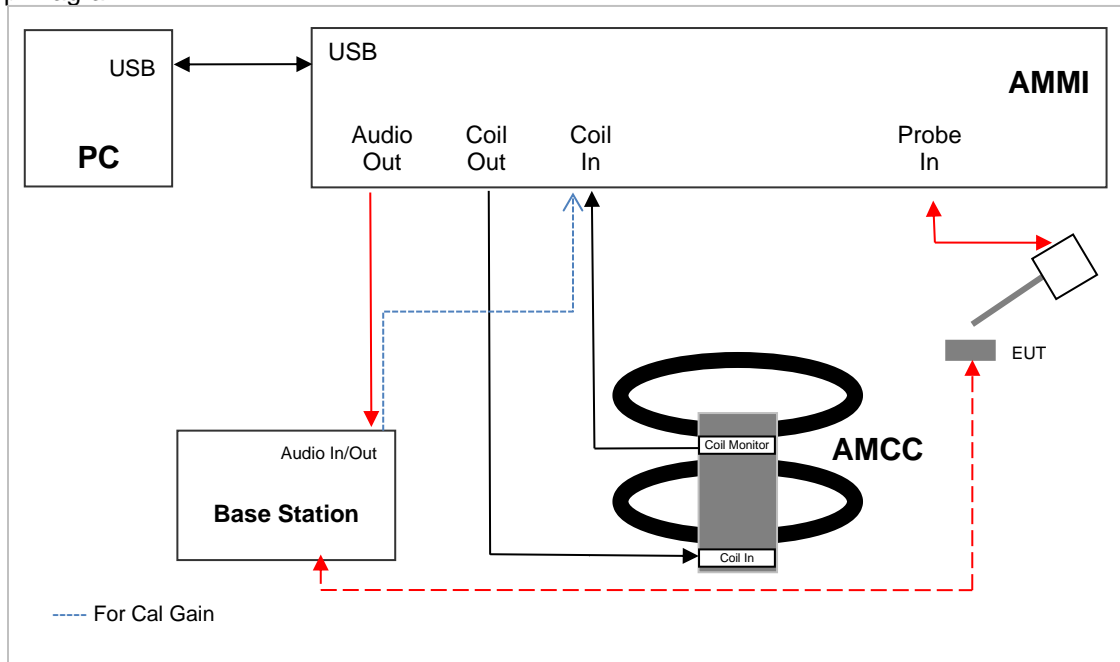

5.2. VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWi-Fi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over Wi-Fi via the Internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.


The set up for VoWi-Fi uses the base station as described in §5.1 with the exception that the reference audio level is set to -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to §6).

An investigation was performed to determine worst case codec, bit rate, and air interface configuration (refer to §9).

5.3. Over the Top (OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the FaceTime service, using ACC-ELD as its only codec (refer to §8.1 for air interface details and §9.2.2 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device³ connects to the cloud-based FaceTime service via a Wi-Fi access point and router, or a RJ45 Ethernet connection. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §9.2.2).

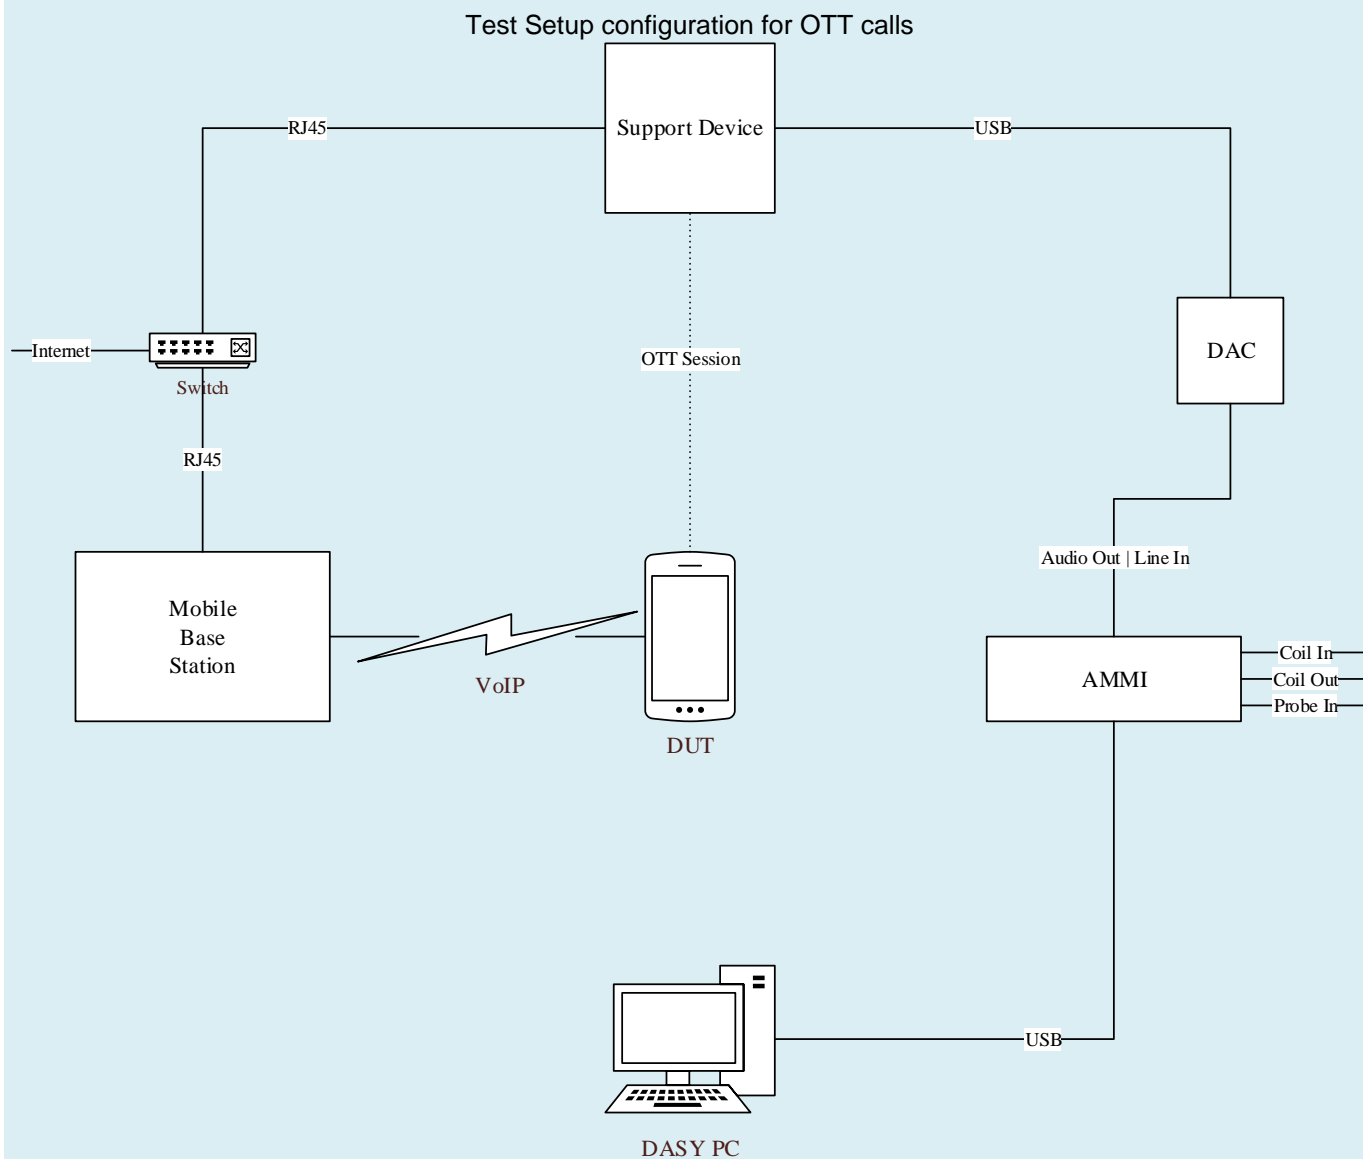

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

³ The support device is an Apple iMac

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

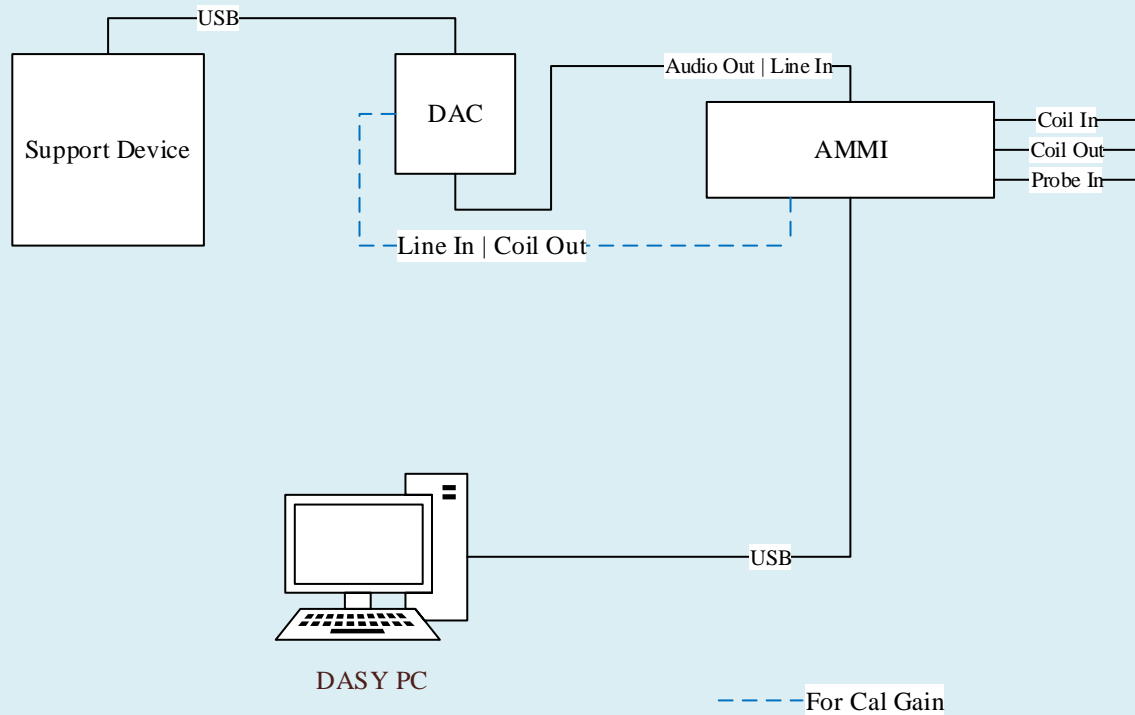

The DAC's gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A) at the output. SPEAG's "TN-LK-05042018-C-T-Coil_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §6 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

6. Audio Level and Gain Measurements

The adjusted gain was calculated using Speag's *TN-LK-05042018-D-T-Coil_Levels* document (please refer to Appendix E). First, the output of AMMI is determined in a closed loop, then, using the CMW500's input sensitivity, the adjusted gain required for testing can then be calculated. The adjusted linear gain used within this report is as follows:

6.1. GSM/W-CDMA and VoLTE

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-16.00	14.90	5.56
Voice 1 kHz	-16.00	27.63	24.07
Voice 300-3kHz	-16.00	33.48	47.20

The following software/firmware was used to simulate the VoLTE server for testing:

Firmware	License Keys	Software Name
V3.7.60 for LTE	KS500	LTE FDD R8 SIG BASIC
	KS550	LTE TDD R8 SIG BASIC
	KA100	IP APPL ENABLING IPv4
V3.7.20 for Audio	KA150	IP APPL ENABLING IPv6
	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

6.2. CDMA (1xRTT)

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-18.00	12.90	4.42
Voice 1 kHz	-18.00	25.63	19.12
Voice 300-3kHz	-18.00	31.48	37.50

6.3. VoWi-Fi – For PAG REUSE

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-20.00	10.90	3.51
Voice 1 kHz	-20.00	23.63	15.19
Voice 300-3kHz	-20.00	29.48	29.78

Firmware	License Keys	Software Name
V3.7.40 for WLAN	KS650	WLAN A/B/G SIG BASIC
	KS651	WLAN N SIG BASIC
	KS656	WLAN IEEE 802.11ac
	KS657	WLAN IEEE 802.11ax
V3.7.20 for Audio	KA100	IP APPL ENABLING IPv4
	KA150	IP APPL ENABLING IPv6
	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

6.4. Over the Top (OTT) – For PAG REUSE

For EDGE, HSPA, Ev-Do, LTE, and Wi-Fi, the linear gain levels are listed below were used. The results below are based on a reference input level of -20 dBm0. Granted, the C63.19-2011 interpretation for T-coil audio levels for LTE states that an input reference level of -16 dBm0 should be used, we, the test lab, opted for -20 dBm0 for LTE due to it being a more conservative input reference level.

To calibrate the DAC (refer §5.3), three .wav audio files (sine wave, 1 kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-20.00	18.69	8.60
Voice 1 kHz	-20.00	31.42	37.22
Voice 300-3kHz	-20.00	37.27	72.99

7. T-coil Measurement Criteria

7.1. Frequency Response


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

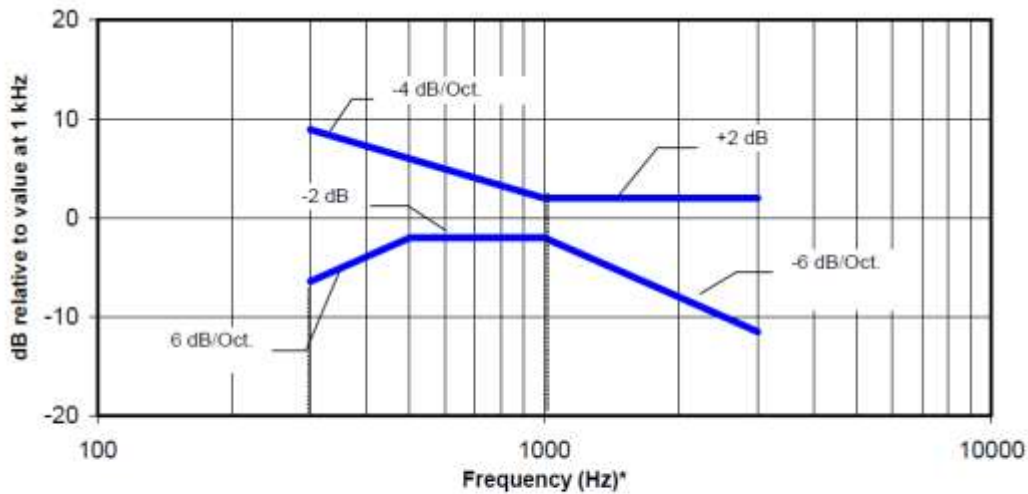

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.1—Magnetic field frequency response for WDs with field strength ≤ -15 dB (A/m) at 1 kHz

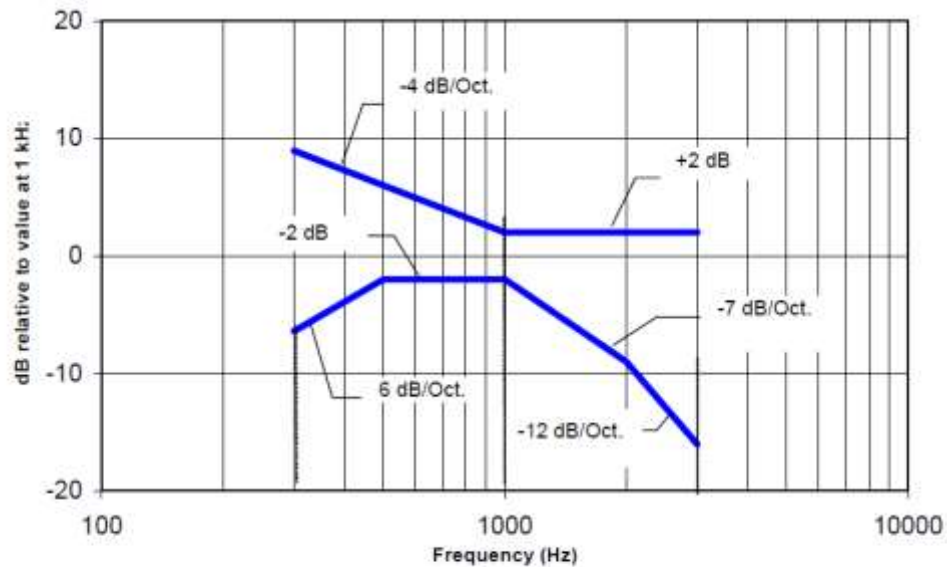

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds -15 dB(A/m) at 1 kHz

7.2. Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

Table 8.5—T-Coil signal-to-noise categories

Category	Telephone parameters WD signal quality [(signal + noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	>30 dB

Measurement locations and reference plane to be used for the T-coil measurements

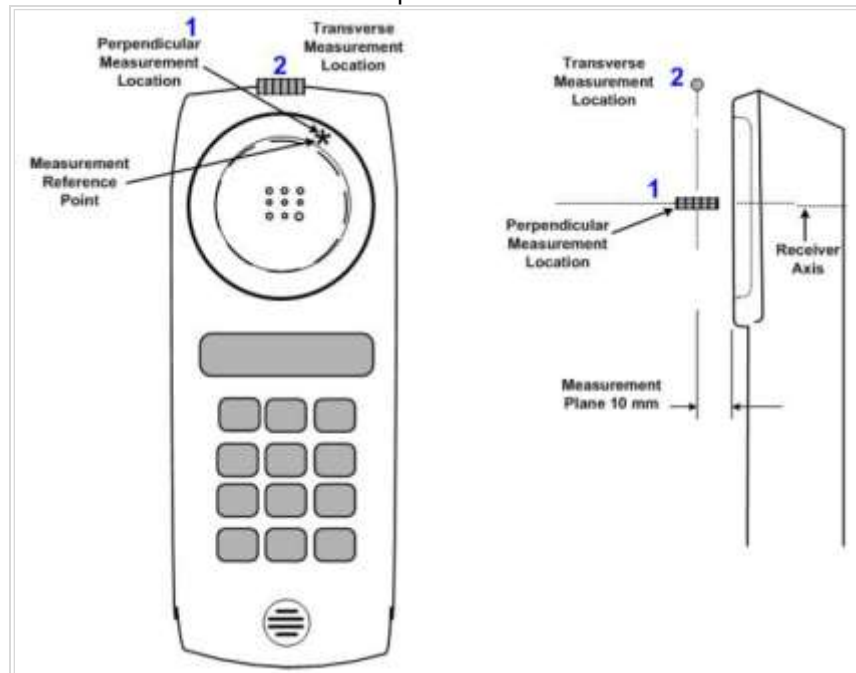

8. Device Under Test

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

LAT 1 (Primary Cellular Antenna) - located all along the bottom of the device.

UAT 1 (Secondary Cellular Antenna (699 – 2700 MHz only), Wi-Fi 2.4 GHz, and Bluetooth) - located all along the top of the device.

UAT 2 (Secondary Cellular 3.4 GHz Antenna (only) and Wi-Fi 5GHz Bands) – located at the upper left corner of the device.

LAT 3 (Wi-Fi 2.4/5 GHz Bands and Bluetooth) – located at the lower right corner of the device.

Normal operation	Held to head
Back Cover	The Back Cover is not removable

8.1. Air Interfaces and Operating Mode

Air Interface	Bands (MHz)	Type	C63.19 Tested	Simultaneous Transmitter	OTT Testing Required? Name of Voice Service ¹	Power Reduction	Audio Codecs Evaluated
GSM	850	VO	Yes	Wi-Fi & BT	CMRS	N/A	EFR
	1900					No	
	GPRS/EDGE	VD	Yes	Wi-Fi & BT	Yes ² FaceTime	N/A	ACC-ELD
W-CDMA (UMTS)	850	VO	Yes	Wi-Fi & BT	CMRS	N/A	AMR-NB & AMR-WB
	1700						
	1900	VD	Yes	Wi-Fi & BT	Yes ² FaceTime	N/A	ACC-ELD
CDMA	800	VO	Yes	Wi-Fi & BT	CMRS	N/A	EVRC & EVRC-B
	1900						
	EVDO	VD	Yes	Wi-Fi & BT	Yes ² FaceTime	N/A	ACC-ELD
LTE - FDD	700 (B12/13/17)	VD	Yes	Wi-Fi & BT	Yes ² FaceTime & VoLTE	N/A	AMR-NB, AMR-WB, EVS, & ACC-ELD
	850 (B5/26/27)						
	1700 (B4/66)						
	1900 (B2/25)						
	2300 (B30)						
2600 (B7)							
LTE - TDD	2500 (B41 ³)	VD	Yes	Wi-Fi & BT	Yes ² FaceTime & VoLTE	N/A	AMR-NB, AMR-WB, EVS, & ACC-ELD
	3600 (B48)						
Wi-Fi	2450	VD	Yes	WWAN	Yes ² FaceTime & Wi-Fi Calling	N/A	AMR-NB, AMR-WB, EVS, & ACC-ELD
	5200 (U-NII-1)			WWAN & BT			
	5300 (U-NII-2A)						
	5500 (U-NII-2C)						
	5800 (U-NII-3)						
BT	2450	DT	NA	WWAN & Wi-Fi (5 GHz bands)	NA	N/A	N/A
Type VO: Legacy Cellular Voice Service DT: Digital Transport only (no voice) VD: IP Voice Service over Digital Transport CMRS: Commercial Mobile Radio Service			Note: 1. For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 was used 2. For PAG REUSE 3. LTE-TDD was tested using Power Class II				

9. Investigations (Antenna, Codec, & Air Interface)

9.1. CMRS

An investigation was performed to determine the worst-case antenna per technology. All subsequent measurements were determined by this investigation.

9.1.1. Antenna Investigation

Note(s)	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
1	GSM 850 Voice Coder Speechcodec: Low	190 836.6 MHz	N/A	LAT 1	z (Axial)	4.65	-21.28	-50.49	2.00	41.30	T4
					y (Transversal)	-4.95	-26.18	-50.49		38.87	T4
				UAT 1	z (Axial)	4.63	-37.48	-50.49	2.00	42.11	T4
					y (Transversal)	-4.56	-44.51	-50.49		39.95	T4
2	W-CDMA B1 AMR-NB Bit rate: 4.75 kbps	9400 1880 MHz	N/A	LAT 1	z (Axial)	1.79	-20.50	-50.49	2.00	48.69	T4
					y (Transversal)	-5.55	-26.17	-50.49		40.37	T4
				UAT 1	z (Axial)	2.20	-46.57	-50.49	1.94	48.77	T4
					y (Transversal)	-5.31	-46.32	-50.49		41.01	T4
3	CDMA2000 BCO RC1 / SO3 Full Fr Voice Coder: 8K EVRC Low	384 836.52 MHz	N/A	LAT 1	z (Axial)	-0.37	-29.18	-50.45	2.00	48.02	T4
					y (Transversal)	-6.30	-32.76	-50.48		40.99	T4
				UAT 1	z (Axial)	-0.91	-47.99	-50.45	2.00	47.09	T4
					y (Transversal)	-6.87	-46.89	-50.48		40.01	T4
4	LTE Band 25 QPSK 1/49 RB, AMR-NB Bit rate: 4.75 kbps	26365 1882.5 MHz	20 MHz	LAT 1	z (Axial)	4.90	-23.80	-50.55	2.00	51.78	T4
					y (Transversal)	-2.12	-26.60	-50.48		43.60	T4
				UAT 1	z (Axial)	5.32	-46.04	-50.55	2.00	51.36	T4
					y (Transversal)	-1.76	-45.84	-50.48		44.07	T4
5	LTE Band 41 QPSK 1/49 RB, AMR-NB Bit rate: 4.75 kbps	40620 2593 MHz	20 MHz	LAT 1	z (Axial)	-6.47	-21.00	-50.55	1.59	48.86	T4
					y (Transversal)	-2.28	-23.18	-50.48		42.26	T4
				UAT 1	z (Axial)	6.81	-42.49	-50.55	2.00	49.30	T4
					y (Transversal)	-1.73	-44.00	-50.48		42.28	T4
5a	LTE Band 48 QPSK 1/49 RB, AMR-NB Bit rate: 4.75 kbps	55990 3625 MHz	20 MHz	LAT 1	z (Axial)	7.21	-21.39	-50.55	1.85	48.13	T4
					y (Transversal)	-2.31	-21.44	-50.48		42.88	T4
				UAT 2	z (Axial)	7.15	-40.99	-50.55	2.00	48.14	T4
					y (Transversal)	-2.28	-44.23	-50.48		41.95	T4
6	802.11b AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	20 MHz	UAT 1	z (Axial)	4.03	-24.69	-50.24	2.00	48.03	T4
					y (Transversal)	-3.93	-26.77	-50.25		40.24	T4
				LAT 3	z (Axial)	4.09	-43.92	-50.24	1.92	48.01	T4
					y (Transversal)	-3.84	-43.24	-50.25		39.40	T4
7	802.11a AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	20 MHz	UAT 2	z (Axial)	2.88	-26.34	-50.24	1.82	46.73	T4
					y (Transversal)	-5.20	-27.28	-50.25		41.01	T4
				LAT 3	z (Axial)	2.83	-44.27	-50.24	1.71	47.10	T4
					y (Transversal)	-4.71	-44.82	-50.25		40.11	T4

Note(s):

- LAT 1 has been determined to be the worst-case antenna for GSM.
- LAT 1 has been determined to be the worst-case antenna for W-CDMA.
- UAT 1 has been determined to be the worst-case antenna for CDMA.
- LAT 1 has been determined to be the worst-case antenna for LTE-FDD.
- LAT 1 had been determined to be the worst-case antenna for LTE-FDD
 - UAT 2 have been determined to be the worst-case antenna for LTE-TDD (Band 48 only).
- LAT 3 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
- LAT 3 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

9.1.2. Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each W-CDMA, LTE FDD and LTE TDD.

The highlighted results below were determined to be the worst-case codec configuration(s) for LTE and W-CDMA.

W-CDMA Codec Investigation:

W-CDMA Codec Investigation											
Codec State	AMR-NB (kbps)			AMR-WB (kbps)			Orientation	Antenna	Band/Channel/ Bandwidth		
	4.75	7.4	12.2	6.6	15.85	23.85					
ABM1 (dB/m)	5.58	5.91	6.09	5.00	6.20	6.33	z (Axial)	LAT 1	W-CDMA BII Ch. 9400		
ABM2 (dBA/m)	-22.06	-44.63	-43.89	-22.96	-43.75	-43.74					
SNR (dB)	50.57	50.54	49.98	49.20	49.95	50.07					
Freq. Resposne (dB)	2.00	2.00	2.00	0.52	2.00	2.00					
ABM1 (dB/m)	-3.31	-2.64	-2.47	-4.32	-2.54	-2.54	y (Transversal)			LAT 1	W-CDMA BII Ch. 9400
ABM2 (dBA/m)	-26.02	-44.88	-44.80	-26.41	-45.09	-44.32					
SNR (dB)	41.40	42.24	42.34	40.81	42.55	41.78					

VoLTE Codec Investigation:

VoLTE Codec Investigation														
Codec State	AMR-NB (kbps)			AMR-WB (kbps)			EVS (kbps)			Orientation	Antenna	Band/Channel/ Bandwidth		
	4.75	7.4	12.2	6.6	15.85	23.85	5.9	9.6	24.4					
ABM1 (dB/m)	4.11	4.42	4.64	5.51	6.70	6.73	4.76	6.41	6.59	z (Axial)	LAT 1	LTE Band 25 CH. 26365 1/49 RB QPSK 20 MHz BW		
ABM2 (dBA/m)	-25.69	-46.52	-46.07	-25.88	-43.80	-43.27	-24.41	-43.84	-42.76					
SNR (dB)	51.48	50.93	50.71	49.82	50.50	50.00	47.81	50.25	49.36					
Freq. Resposne (dB)	1.69	2.00	2.00	1.36	2.00	2.00	2.00	2.00	2.00					
ABM1 (dB/m)	-2.04	-1.65	-1.50	-3.69	-2.21	-2.20	-3.66	-2.30	-1.74	y (Transversal)			LAT 1	LTE Band 41 CH. 40620 1/49 RB QPSK 20 MHz BW
ABM2 (dBA/m)	-27.10	-44.56	-44.00	-28.29	-45.22	-44.38	-25.57	-44.56	-44.53					
SNR (dB)	41.81	42.90	42.50	41.91	43.01	42.18	41.31	42.23	42.79					
ABM1 (dB/m)	6.47	7.11	7.16	6.14	7.54	7.52	5.84	7.37	7.62	z (Axial)				
ABM2 (dBA/m)	-21.00	-18.77	-42.04	-24.65	-40.63	-41.25	-23.07	-40.31	-41.33					
SNR (dB)	48.86	49.91	49.20	48.23	48.17	48.77	45.59	47.68	48.95					
Freq. Resposne (dB)	1.59	2.00	2.00	0.79	2.00	2.00	1.82	2.00	2.00					
ABM1 (dB/m)	-2.28	-2.72	-2.21	-3.54	-1.98	-1.98	-3.00	-1.32	-1.44	y (Transversal)	LAT 1	LTE Band 41 CH. 40620 1/49 RB QPSK 20 MHz BW		
ABM2 (dBA/m)	-23.18	-25.74	-43.81	-23.79	-44.33	-44.52	-23.08	-44.05	-43.02					
SNR (dB)	42.26	42.51	41.60	41.37	42.36	42.54	40.99	42.73	41.58					

Note(s):

1. For W-CDMA, it is observed that 6.60 kbps is the worst-case.
2. For LTE-FDD, it is observed that 5.90 kbps is the worst-case.
3. For LTE-TDD, it is observed that 5.90 kbps is the worst-case.

9.1.3. Air Interface Investigation

A limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

W-CDMA Air Interface Investigation:

W-CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Antenna	Bandwidth (if applicable)	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
W-CDMA BII AMR-WB Bit rate: 6.6 kbps	9262 1852.4 MHz	LAT 1	N/A	z (Axial)	5.11	-43.90	-50.50	0.66	49.01	T4	-1.5, 3.3, 3.7
				y (Transversal)	-3.68	-45.04	-50.53		41.36	T4	-4.2, -9.4, 3.7
	9400 1880.0 MHz	LAT 1	N/A	z (Axial)	5.00	-22.96	-50.50	2.00	49.20	T4	-1.7, 3.3, 3.7
				y (Transversal)	-4.32	-26.41	-50.53		40.81	T4	-4.2, -9.6, 3.7
	9538 1907.6 MHz	LAT 1	N/A	z (Axial)	4.85	-43.86	-50.50	0.43	48.71	T4	-1.5, 3.3, 3.7
				y (Transversal)	-3.81	-45.01	-50.53		41.20	T4	-4.2, -9.4, 3.7
W-CDMA BV AMR-WB Bit rate: 6.6 kbps	4132 826.4 MHz	LAT 1	N/A	z (Axial)	4.64	-44.63	-50.50	0.75	49.27	T4	-1.9, 4, 3.7
				y (Transversal)	-3.40	-44.89	-50.53		41.49	T4	-4.2, -8.8, 3.7
	4183 836.6 MHz	LAT 1	N/A	z (Axial)	4.41	-24.76	-50.50	0.62	48.91	T4	-2.1, 4.2, 3.7
				y (Transversal)	-3.83	-25.80	-50.53		40.96	T4	-4.2, -8.8, 3.7
	4233 846.6 MHz	LAT 1	N/A	z (Axial)	4.72	-44.39	-50.50	1.03	49.12	T4	-1.9, 4, 3.7
				y (Transversal)	-3.29	-44.48	-50.53		41.19	T4	-4.2, -8.8, 3.7
W-CDMA BIV AMR-WB Bit rate: 6.6 kbps	1312 1712.4 MHz	LAT 1	N/A	z (Axial)	5.45	-43.10	-50.50	0.65	48.55	T4	-0.8, 3.2, 3.7
				y (Transversal)	-3.65	-44.82	-50.53		41.17	T4	-3.2, -10.1, 3.7
	1413 1732.6 MHz	LAT 1	N/A	z (Axial)	5.18	-24.05	-50.50	1.13	48.60	T4	-0.8, 3.3, 3.7
				y (Transversal)	-4.08	-25.58	-50.53		40.89	T4	-3.3, -10, 3.7
	1513 1752.6 MHz	LAT 1	N/A	z (Axial)	5.22	-43.04	-50.50	0.80	48.26	T4	-0.8, 3.2, 3.7
				y (Transversal)	-3.75	-44.82	-50.53		41.07	T4	-3.2, -10.1, 3.7

VoLTE Air Interface Investigation:

VoLTE Air Interface Investigation														
Mode:	Bandwidth (if applicable)	Antenna	Channel and Frequency	RB Allocation		Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	
LTE Band 25 QPSK EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	26140 1860 MHz	50	24	z (Axial)	3.39	-43.48	-50.52	2.00	46.87	T4	0, 3.2, 3.7	
						y (Transversal)	-5.94	-45.20	-50.50		39.26	T4	-4.5, -8.7, 3.7	
			26365 1882.5 MHz	1	0	z (Axial)	3.94	-40.39	-50.52	2.00	44.33	T4	0, 3.2, 3.7	
						y (Transversal)	-5.50	-45.04	-50.50		39.53	T4	-4.5, -8.7, 3.7	
			1	49	z (Axial)	4.76	-24.41	-50.52	2.00	47.81	T4	0, 3.3, 3.7		
					y (Transversal)	-3.66	-25.57	-50.50		41.31	T4	-4.6, -8.8, 3.7		
			1	99	z (Axial)	3.46	-43.32	-50.52	2.00	46.77	T4	0, 3.2, 3.7		
					y (Transversal)	-6.11	-44.94	-50.50		38.83	T4	-4.5, -8.7, 3.7		
			50	0	z (Axial)	1.83	-43.04	-50.52	2.00	44.86	T4	0, 3.2, 3.7		
					y (Transversal)	-6.26	-44.14	-50.50		37.87	T4	-4.5, -8.7, 3.7		
			50	24	z (Axial)	3.67	-42.88	-50.52	2.00	46.54	T4	0, 3.2, 3.7		
					y (Transversal)	-5.20	-42.60	-50.50		37.40	T4	-4.4, -8.7, 3.7		
			50	49	z (Axial)	3.66	-42.58	-50.52	2.00	46.24	T4	0, 3.2, 3.7		
					y (Transversal)	-4.96	-44.42	-50.50		39.45	T4	-4.5, -8.7, 3.7		
			100	0	z (Axial)	2.13	-43.33	-50.52	2.00	45.46	T4	0, 3.2, 3.7		
					y (Transversal)	-7.00	-44.42	-50.50		37.42	T4	-4.5, -8.7, 3.7		
26590 1905 MHz	50	24	z (Axial)	3.15	-42.79	-50.52	2.00	45.94	T4	0, 3.2, 3.7				
			y (Transversal)	-4.39	-43.99	-50.50		39.60	T4	-4.5, -8.7, 3.7				
LTE Band 25 16QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	26365 1882.5 MHz	50	24	z (Axial)	2.27	-25.55	-50.52	2.00	47.19	T4	-2.1, 3.7, 3.7	
						y (Transversal)	-4.18	-26.85	-50.50		39.44	T4	-0.4, -8.8, 3.7	
LTE Band 25 64QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	26365 1882.5 MHz	50	24	z (Axial)	2.10	-22.33	-50.52	1.75	47.57	T4	-2.1, 3.7, 3.7	
						y (Transversal)	-5.67	-27.74	-50.50		39.70	T4	-3.7, -7.9, 3.7	
LTE Band 25 256QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	26365 1882.5 MHz	50	24	z (Axial)	3.17	-25.52	-50.52	2.00	48.16	T4	-0.4, 3.3, 3.7	
						y (Transversal)	-6.54	-28.50	-50.50		39.23	T4	-2.9, -12.1, 3.7	
LTE Band 26 QPSK EVS Bit rate: 5.9 kbps	15 MHz	LAT 1	26865 831.5 MHz	36	20	z (Axial)	2.32	-26.06	-50.52	2.00	46.67	T4	-0.4, 4.2, 3.7	
						y (Transversal)	-4.52	-29.61	-50.50		39.67	T4	-0.4, -9.6, 3.7	
LTE Band 12 QPSK EVS Bit rate: 5.9 kbps	10 MHz	LAT 1	23095 707.5 MHz	25	12	z (Axial)	4.68	-23.60	-50.52	2.00	47.45	T4	-0.4, 0, 3.7	
						y (Transversal)	-5.78	-28.30	-50.50		39.95	T4	-5.4, -8.3, 3.7	

Note(s):

For all subsequent tests for LTE-FDD, middle channel, QPSK modulation, and 50% RB size and middle RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.

VoLTE Air Interface Investigation (continued):

VoLTE Air Interface Investigation													
Mode:	Bandwidth (if applicable)	Antenna	Channel and Frequency	RB Allocation		Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
LTE Band 41 QPSK EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	39750 2506 MHz	100	0	z (Axial)	3.20	-40.55	-50.52	2.00	43.75	T4	-0.6, 0.8, 3.7
						y (Transversal)	-5.71	-44.17	-50.49		38.46	T4	-3.8, -9.2, 3.7
			40185 2549.5 MHz	100	0	z (Axial)	6.34	-39.97	-50.52	2.00	46.31	T4	-0.6, 0.8, 3.7
						y (Transversal)	-5.90	-43.74	-50.49		37.84	T4	-3.8, -9.2, 3.7
			40620 2593 MHz	1	0	z (Axial)	5.95	-40.38	-50.52	2.00	46.33	T4	-0.6, 0.8, 3.7
						y (Transversal)	-3.50	-43.45	-50.49		39.95	T4	-3.8, -9.2, 3.7
				1	49	z (Axial)	5.84	-23.07	-50.52	1.82	45.59	T4	-0.4, 0.8, 3.7
						y (Transversal)	-3.00	-23.08	-50.49		40.99	T4	-3.7, -9.2, 3.7
				1	99	z (Axial)	3.27	-40.75	-50.52	2.00	44.02	T4	-0.6, 0.8, 3.7
						y (Transversal)	-5.76	-43.99	-50.49		38.23	T4	-3.8, -9.2, 3.7
				50	0	z (Axial)	6.48	-41.01	-50.52	1.92	47.49	T4	-0.6, 0.8, 3.7
						y (Transversal)	-5.75	-44.60	-50.49		38.85	T4	-3.8, -9.2, 3.7
				50	24	z (Axial)	2.37	-40.80	-50.52	2.00	43.17	T4	-0.6, 0.8, 3.7
						y (Transversal)	-2.83	-43.69	-50.49		40.86	T4	-3.8, -9.2, 3.7
			50	49	z (Axial)	1.88	-40.92	-50.52	2.00	42.79	T4	-0.6, 0.8, 3.7	
					y (Transversal)	-3.87	-43.46	-50.49		39.59	T4	-3.8, -9.2, 3.7	
			100	0	z (Axial)	3.29	-40.78	-50.52	2.00	44.07	T4	-0.6, 0.8, 3.7	
					y (Transversal)	-6.35	-43.40	-50.49		37.04	T4	-3.8, -9.2, 3.7	
41055 2636.5 MHz	100	0	z (Axial)	5.86	-40.57	-50.52	2.00	46.43	T4	-0.6, 0.8, 3.7			
			y (Transversal)	-2.97	-43.32	-50.49		40.36	T4	-3.8, -9.2, 3.7			
41490 2680 MHz	100	0	z (Axial)	4.09	-39.98	-50.52	2.00	44.07	T4	-0.6, 0.8, 3.7			
			y (Transversal)	-2.38	-44.26	-50.49		41.89	T4	-3.8, -9.2, 3.7			
LTE Band 41 QPSK EVS Bit rate: 5.9 kbps	15 MHz	LAT 1	40620 2593 MHz	75	0	z (Axial)	5.06	-23.59	-50.52	2.00	45.31	T4	0, -0.4, 3.7
						y (Transversal)	-3.89	-23.17	-50.49		39.99	T4	-5, -8.3, 3.7
	10 MHz	LAT 1	40620 2593 MHz	50	0	z (Axial)	5.29	-24.65	-50.52	2.00	47.20	T4	0, 0.4, 3.7
						y (Transversal)	-6.35	-26.73	-50.51		39.59	T4	-4.6, -12.1, 3.7
LTE Band 41 16QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	40620 2593 MHz	100	0	z (Axial)	5.52	-24.15	-50.52	1.99	47.40	T4	-0.4, 0.8, 3.7
						y (Transversal)	-4.12	-26.46	-50.51		39.83	T4	-3.3, -8.3, 3.7
LTE Band 41 64QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	40620 2593 MHz	100	0	z (Axial)	3.46	-23.23	-50.52	2.00	46.94	T4	-4.2, 2.5, 3.7
						y (Transversal)	-4.11	-23.78	-50.51		40.33	T4	-3.3, -8.8, 3.7
LTE Band 41 256QAM EVS Bit rate: 5.9 kbps	20 MHz	LAT 1	40620 2593 MHz	100	0	z (Axial)	4.70	-22.85	-50.52	2.00	45.99	T4	-1.7, -0.4, 3.7
						y (Transversal)	-4.37	-23.97	-50.51		39.85	T4	-4.6, -9.2, 3.7

Note(s):

For all subsequent tests for LTE-TDD, middle channel, QPSK modulation, and 100% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.

9.1.4. VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4GHz and 5GHz.

The highlighted results below were determined to be the worst-case codec configuration(s) for Wi-Fi 2.4GHz and 5GHz

VoWi-Fi Codec Investigation												
Codec State	AMR-NB (kbit/s)			AMR-WB (kbit/s)			EVS (kbit/s)			Orientation	Antenna	Band/Channel/ Bandwidth
	4.75	7.4	12.2	6.6	15.85	23.85	5.9	9.6	24.4			
ABM1 (dB/m)	4.09	2.77	3.26	2.61	3.88	3.83	3.18	3.33	4.21	z (Axial)	LAT 3	802.11b Ch. 6 DSSS 1 Mbps
ABM2 (dBA/m)	-43.92	-24.23	-44.11	-24.85	-42.93	-42.93	-27.33	-42.63	-42.39			
SNR (dB)	48.01	46.45	47.37	46.00	46.81	46.76	46.04	45.95	46.59			
Freq. Resposne (dB)	1.92	2.00	2.00	0.96	2.00	2.00	2.00	1.95	2.00			
ABM1 (dB/m)	-3.84	-5.75	-5.55	-6.55	-5.17	-5.24	-5.60	-4.04	-4.15	y (Transversal)	LAT 3	802.11a Ch. 36 BPSK 6 Mbps
ABM2 (dBA/m)	-43.24	-23.52	-46.88	-23.75	-46.34	-45.71	-28.33	-44.50	-44.36			
SNR (dB)	39.40	41.04	41.33	39.73	41.17	40.46	41.04	40.46	40.21			
ABM1 (dB/m)	2.83	3.66	3.77	3.72	4.60	4.68	3.58	3.74	3.60	z (Axial)	LAT 3	802.11a Ch. 36 BPSK 6 Mbps
ABM2 (dBA/m)	-44.27	-28.53	-43.37	-28.12	-41.96	-42.01	-31.98	-43.92	-45.19			
SNR (dB)	47.10	47.49	47.14	46.06	46.56	46.69	47.08	47.66	48.79			
Freq. Resposne (dB)	1.71	2.00	2.00	0.62	2.00	2.00	2.00	1.81	2.00			
ABM1 (dB/m)	-4.71	-5.55	-4.85	-6.20	-4.65	-4.68	-3.64	-3.45	-3.74	y (Transversal)	LAT 3	802.11a Ch. 36 BPSK 6 Mbps
ABM2 (dBA/m)	-44.82	-26.93	-46.10	-27.26	-46.74	-45.80	-33.24	-45.90	-45.87			
SNR (dB)	40.11	41.16	41.24	40.86	42.08	41.13	43.28	42.46	42.13			

Note(s):

1. For Wi-Fi 2.4 GHz, it is observed that 4.75 kbps is the worst-case.
2. For Wi-Fi 5 GHz, it is observed that 4.75 kbps is the worst-case.

9.1.5. VoWi-Fi Air Interface Investigation

VoWi-Fi Air Interface Investigation												
Mode:	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
802.11b AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	LAT 3	CCK	5.5 Mbps	z (Axial)	2.83	-25.14	-50.20	1.75	46.64	T4	-1.7, 3.3, 3.7
					y (Transversal)	-6.29	-24.26	-50.21		40.34	T4	-2.5, -12.1, 3.7
				11 Mbps	z (Axial)	3.18	-44.96	-50.20	2.00	48.14	T4	-1.5, 3.3, 3.7
					y (Transversal)	-5.79	-46.67	-50.21		40.87	T4	-2.6, -12.1, 3.7
802.11g AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	LAT 3	DSSS	1 Mbps	z (Axial)	2.61	-25.11	-50.20	1.86	46.85	T4	-2.5, 3.3, 3.7
				y (Transversal)	-5.93	-24.53	-50.21		40.90	T4	-4.6, -10, 3.7	
			QPSK	12 Mbps	z (Axial)	2.72	-45.82	-50.20	1.63	48.55	T4	-2.5, 3.3, 3.7
				y (Transversal)	-5.53	-47.04	-50.21		41.52	T4	-4.7, -10.2, 3.7	
			64QAM	54 Mbps	z (Axial)	2.85	-45.46	-50.20	1.55	48.31	T4	-2.5, 3.3, 3.7
				y (Transversal)	-5.46	-46.30	-50.21		40.83	T4	-4.7, -10.2, 3.7	
802.11n AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	3.29	-25.42	-50.20	1.10	46.76	T4	-2.1, 2.5, 3.7
				y (Transversal)	-5.44	-25.46	-50.21		40.74	T4	-3.7, -10.8, 3.7	
			MCS3	26 Mbps	z (Axial)	3.65	-44.06	-50.20	1.58	47.71	T4	-1.9, 2.3, 3.7
				y (Transversal)	-4.86	-46.20	-50.21		41.34	T4	-3.6, -10.8, 3.7	
			MCS7	65 Mbps	z (Axial)	3.49	-43.95	-50.20	1.16	47.44	T4	-1.9, 2.3, 3.7
				y (Transversal)	-4.87	-46.37	-50.21		41.50	T4	-3.6, -10.8, 3.7	
802.11ac AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	4.19	-26.69	-50.20	1.55	47.43	T4	-0.8, 1.2, 3.7
				y (Transversal)	-6.06	-24.27	-50.21		41.96	T4	-5, -11.3, 3.7	
			MCS4	39 Mbps	z (Axial)	-4.09	-42.33	-50.20	2.00	46.42	T4	-1, 1.5, 3.7
				y (Transversal)	-5.70	-47.99	-50.21		42.29	T4	-5.1, -11.3, 3.7	
			MCS8	78 Mbps	z (Axial)	4.23	-43.54	-50.20	1.83	47.77	T4	-1, 1.5, 3.7
				y (Transversal)	-5.80	-46.70	-50.21		40.89	T4	-5.1, -11.2, 3.7	
802.11ax AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	LAT 3	MCS0	7.3 Mbps	z (Axial)	2.75	-29.96	-50.27	1.95	48.42	T4	-3.3, 2.5, 3.7
				y (Transversal)	-4.86	-29.40	-50.26		41.57	T4	-3.7, -9.2, 3.7	
			MCS5	58.5 Mbps	z (Axial)	2.98	-45.33	-50.27	2.00	48.31	T4	-3.5, 2.5, 3.7
				y (Transversal)	4.45	-46.42	-50.26		41.98	T4	-3.7, -9, 3.7	
			MCS9	97.5 Mbps	z (Axial)	2.81	-45.54	-50.27	2.00	48.35	T4	-3.5, 2.5, 3.7
				y (Transversal)	-4.47	-46.34	-50.26		41.87	T4	-3.7, -9, 3.7	
802.11a AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	LAT 3	QPSK	18 Mbps	z (Axial)	3.27	-30.06	-50.20	1.84	48.29	T4	-0.8, 2.9, 3.7
				y (Transversal)	-4.82	-29.88	-50.21		42.49	T4	-0.8, -11.3, 3.7	
			64QAM	54 Mbps	z (Axial)	3.47	-44.74	-50.20	2.00	48.21	T4	-0.8, 2.8, 3.7
				y (Transversal)	-4.79	-46.72	-50.21		41.93	T4	-0.8, -11.2, 3.7	
802.11n 20 MHz AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	3.62	-28.11	-50.20	2.00	46.87	T4	-0.4, 2.5, 3.7
				y (Transversal)	-5.54	-26.16	-50.21		41.45	T4	-2.1, -12.1, 3.7	
			MCS3	26 Mbps	z (Axial)	3.50	-44.17	-50.20	1.61	47.67	T4	-0.3, 2.7, 3.7
				y (Transversal)	-5.19	-46.06	-50.21		40.86	T4	-2.1, -12, 3.7	
			MCS7	65 Mbps	z (Axial)	3.40	-43.98	-50.20	1.73	47.38	T4	-0.3, 2.7, 3.7
				y (Transversal)	-5.22	-47.67	-50.21		42.46	T4	-2.1, -12, 3.7	
802.11n 40 MHz AMR-NB Bit rate: 4.75 kbps	38 5190 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	3.23	-27.47	-50.20	1.94	47.06	T4	-0.4, 2.9, 3.7
				y (Transversal)	-6.07	-26.55	-50.21		41.22	T4	-0.4, -13.3, 3.7	
			MCS3	54 Mbps	z (Axial)	3.25	-44.03	-50.20	1.56	47.28	T4	-0.4, 3, 3.7
				y (Transversal)	-6.29	-48.15	-50.21		41.86	T4	-0.5, -13.5, 3.7	
			MCS7	135 Mbps	z (Axial)	3.29	-40.12	-50.20	1.64	43.41	T4	-0.4, 3, 3.7
				y (Transversal)	-6.14	-48.37	-50.21		42.22	T4	-0.5, -13.5, 3.7	
802.11ac 20 MHz AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	3.37	-25.20	-50.20	1.47	47.09	T4	-0.8, 2.9, 3.7
				y (Transversal)	-4.99	-25.79	-50.21		41.59	T4	-4.6, -9.6, 3.7	
			MCS4	39 Mbps	z (Axial)	3.35	-44.10	-50.20	2.00	47.44	T4	-1, 3, 3.7
				y (Transversal)	-4.78	-47.16	-50.21		42.38	T4	-4.6, -9.7, 3.7	
			MCS8	78 Mbps	z (Axial)	3.29	-44.65	-50.20	2.00	47.94	T4	-1, 3, 3.7
				y (Transversal)	-4.81	-47.31	-50.21		42.50	T4	-4.6, -9.7, 3.7	
802.11ac 40 MHz AMR-NB Bit rate: 4.75 kbps	38 5190 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	3.32	-28.88	-50.20	2.00	48.23	T4	-0.8, 2.9, 3.7
				y (Transversal)	-5.13	-29.20	-50.21		41.73	T4	-4.2, -10, 3.7	
			MCS5	108 Mbps	z (Axial)	3.39	-45.13	-50.20	1.68	48.52	T4	-0.8, 3, 3.7
				y (Transversal)	-4.78	-47.42	-50.21		42.64	T4	-4.3, -9.9, 3.7	
			MCS9	180 Mbps	z (Axial)	3.28	-45.30	-50.20	1.77	48.58	T4	-0.8, 3, 3.7
				y (Transversal)	-4.70	-47.36	-50.21		42.66	T4	-4.3, -9.9, 3.7	

VoWi-Fi Air Interface Investigation (continued):

VoWi-Fi Air Interface Investigation												
Mode	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
802.11ac 80 MHz AMR-NB Bit rate: 4.75 kbps	42 5210 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	2.90	-28.60	-50.20	1.66	47.94	T4	-0.8, 3.3, 3.7
					y (Transversal)	-4.79	-29.85	-50.21		41.09	T4	-0.8, -11.3, 3.7
			MCS5	108 Mbps	z (Axial)	3.29	-45.08	-50.20	2.00	48.37	T4	-0.9, 3.2, 3.7
					y (Transversal)	-4.72	-46.87	-50.21		42.15	T4	-1, -11.3, 3.7
			MCS9	180 Mbps	z (Axial)	3.19	-44.98	-50.20	2.00	48.16	T4	-0.9, 3.2, 3.7
					y (Transversal)	-4.82	-46.64	-50.21		41.82	T4	-1, -11.3, 3.7
802.11ax 20 MHz AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	LAT 3	MCS0	8.6 Mbps	z (Axial)	2.03	-29.00	-50.27	2.00	47.72	T4	-3.3, 3.7, 3.7
					y (Transversal)	-4.70	-29.12	-50.26		41.14	T4	-2.9, -9.2, 3.7
			MCS5	58.5 Mbps	z (Axial)	2.22	-46.13	-50.27	1.95	48.35	T4	-3.3, 3.6, 3.7
					y (Transversal)	-4.38	-47.29	-50.26		42.91	T4	-3.1, -9, 3.7
			MCS9	97.5 Mbps	z (Axial)	2.25	-45.82	-50.27	2.00	48.07	T4	-3.3, 3.6, 3.7
					y (Transversal)	-4.39	-46.68	-50.26		42.28	T4	-3.1, -9, 3.7
802.11ax 40 MHz AMR-NB Bit rate: 4.75 kbps	38 5190 MHz	LAT 3	MCS0	17.2 Mbps	z (Axial)	3.73	-29.52	-50.27	1.40	47.34	T4	-1.2, 2.1, 3.7
					y (Transversal)	-5.10	-29.43	-50.26		41.37	T4	-4.2, -9.2, 3.7
			MCS5	117 Mbps	z (Axial)	3.98	-44.37	-50.27	1.97	48.35	T4	-1.2, 2, 3.7
					y (Transversal)	-4.85	-47.02	-50.26		42.17	T4	-4.2, -9.2, 3.7
			MCS9	195 Mbps	z (Axial)	3.83	-44.83	-50.27	1.02	48.66	T4	-1.2, 2, 3.7
					y (Transversal)	-4.80	-47.57	-50.26		42.77	T4	-4.2, -9.2, 3.7
802.11ax 80 MHz AMR-NB Bit rate: 4.75 kbps	42 5210 MHz	LAT 3	MCS0	36 Mbps	z (Axial)	3.17	-29.65	-50.27	1.56	47.48	T4	-2.5, 2.5, 3.7
					y (Transversal)	-5.27	-29.29	-50.26		41.12	T4	-4.2, -9.2, 3.7
			MCS5	245 Mbps	z (Axial)	3.31	-44.84	-50.27	1.63	48.15	T4	-2.5, 2.4, 3.7
					y (Transversal)	-4.70	-46.43	-50.26		41.73	T4	-4.1, -9.3, 3.7
			MCS9	408.3 Mbps	z (Axial)	3.39	-44.78	-50.27	2.00	48.17	T4	-2.5, 2.4, 3.7
					y (Transversal)	-4.77	-46.65	-50.26		41.88	T4	-4.1, -9.3, 3.7

Note(s):

1. For all subsequent tests for 2.4 GHz, 802.11b DSSS 1 Mbps was used in conjunction with the worst-case bit rate found in §9.1.4.
2. For all subsequent tests for 5 GHz, 802.11a BPSK 6 Mbps was used in conjunction with the worst-case bit rate found in §9.1.4.

9.2. OTT Application

An investigation was performed to determine the worst-case antenna per technology. All subsequent measurements were determined by this investigation.

9.2.1. Antenna Investigation

Note(s)	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
1	GSM 850 EGPRS 2 Slots Codec Bit Rate: 20 kbps	190 836.6 MHz	N/A	LAT 1	z (Axial)	6.12	-16.51	-50.83	2.00	43.33	T4
					y (Transversal)	-5.29	-18.73	-50.81	36.66	T4	
				UAT 1	z (Axial)	6.24	-39.95	-50.83	2.00	46.20	T4
					y (Transversal)	-5.96	-21.24	-50.81		36.97	T4
2	W-CDMA B1 HSPA Codec Bit Rate: 32 kbps	9400 1880 MHz	N/A	LAT 1	z (Axial)	0.72	-24.37	-50.27	2.00	47.80	T4
					y (Transversal)	-7.75	-25.72	-50.26		37.10	T4
				UAT 1	z (Axial)	0.89	-46.46	-50.27	2.00	47.35	T4
					y (Transversal)	-6.98	-44.65	-50.26		37.67	T4
3	CDMA2000 BC0 Ev-Do Rev. 0 Codec Bit Rate: 28 kbps	384 836.52 MHz	N/A	LAT 1	z (Axial)	0.59	-28.23	-50.90	2.00	48.69	T4
					y (Transversal)	-6.28	-26.42	-50.92		40.09	T4
				UAT 1	z (Axial)	0.69	-47.83	-50.90	2.00	48.52	T4
					y (Transversal)	-5.79	-45.62	-50.92		39.83	T4
3a	CDMA2000 BC0 Ev-Do Rev. A Codec Bit Rate: 28 kbps	384 836.52 MHz	N/A	LAT 1	z (Axial)	0.87	-27.05	-50.90	2.00	49.32	T4
					y (Transversal)	-6.31	-27.98	-50.92		40.84	T4
				UAT 1	z (Axial)	1.26	-48.31	-50.90	2.00	49.57	T4
					y (Transversal)	-5.92	-46.55	-50.92		40.63	T4
4	LTE Band 25 QPSK 1/49 RB Codec Bit Rate: 28 kbps	26365 1882.5 MHz	20 MHz	LAT 1	z (Axial)	0.89	-20.61	-50.89	2.00	49.01	T4
					y (Transversal)	-6.41	-28.42	-50.87		37.22	T4
				UAT 1	z (Axial)	1.01	-47.82	-50.89	2.00	48.83	T4
					y (Transversal)	-6.11	-44.51	-50.87		38.40	T4
5	LTE Band 41 QPSK 1/49 RB Codec Bit Rate: 28 kbps	40620 2593 MHz	20 MHz	LAT 1	z (Axial)	0.72	-24.50	-50.89	2.00	47.08	T4
					y (Transversal)	-7.84	-25.63	-50.87		36.67	T4
				UAT 1	z (Axial)	-0.16	-46.72	-50.89	2.00	46.57	T4
					y (Transversal)	-7.93	-44.79	-50.87		36.86	T4
5a	LTE Band 48 QPSK 1/49 RB Codec Bit Rate: 28 kbps	55990 3625 MHz	20 MHz	LAT 1	z (Axial)	1.11	-25.46	-50.90	2.00	46.17	T4
					y (Transversal)	-6.31	-26.20	-50.92		38.62	T4
				UAT 2	z (Axial)	1.56	-45.32	-50.90	2.00	46.88	T4
					y (Transversal)	-5.62	-42.93	-50.92		37.31	T4
6	802.11b Codec Bit Rate: 48 kbps	6 2437 MHz	20 MHz (1 Mbps)	UAT 1	z (Axial)	1.72	-22.33	-50.27	2.00	46.07	T4
					y (Transversal)	-7.41	-22.35	-50.26		39.52	T4
				LAT 3	z (Axial)	1.93	-46.95	-50.27	2.00	48.88	T4
					y (Transversal)	-7.08	-45.99	-50.26		38.91	T4
7	802.11a Codec Bit Rate: 48 kbps	36 5180 MHz	20 MHz (6 Mbps)	UAT 2	z (Axial)	3.22	-30.12	-50.27	2.00	49.43	T4
					y (Transversal)	-5.95	-32.21	-50.26		41.28	T4
				LAT 3	z (Axial)	3.10	-43.59	-50.27	2.00	46.69	T4
					y (Transversal)	-5.59	-45.28	-50.26		39.68	T4

Note(s):

1. LAT 1 has been determined to be the worst-case antenna for EDGE (GSM).
2. LAT 1 has been determined to be the worst-case antenna for HSPA (W-CDMA).
3. UAT 1 has been determined to be the worst-case antenna for Ev-Do Rel. 0 (CDMA).
 - a. UAT 1 has been determined to be the worst-case antenna for Ev-Do Rev. A (CDMA).
4. LAT 1 has been determined to be the worst-case antenna for LTE-FDD.
5. LAT 1 has been determined to be the worst-case antenna for LTE-TDD.
 - a. UAT 2 has been determined to be the worst-case antenna for LTE-TDD Band 48 exclusively.
6. LAT 3 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
7. LAT 3 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

9.2.2. Codec Investigation

The OTT Application did not support a means for the test lab to change the codec's bit rates. When a VoIP call was established, the test lab recorded the bit rate used during that session, listed below, for the supported technologies: EDGE, HSPA, Ev-Do Rel. 0 and Rev. A, Wi-Fi 2.4 GHz, and Wi-Fi 5 GHz

Codec Bit Rate (kbps)		
GSM	EDGE	20
W-CDMA	HSPA	32
CDMA	Rel. 0	28
	Rev. A	28
LTE	FDD	28
	TDD	28
Wi-Fi 2.4 GHz	802.11b	48
	802.11g	48
	802.11n	48
	802.11ax	48
Wi-Fi 5 GHz	802.11a	48
	802.11n HT20	48
	802.11n HT40	48
	802.11ac VHT20	48
	802.11ac VHT40	48
	802.11ac VHT80	48
	802.11ax HE20	48
	802.11ax HE40	48
802.11ax HE80	48	

9.2.3. OTT Air Interface Investigation

A limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

GSM Air Interface Investigation:

GSM Air Interface Investigation											
Mode:	Channel and Frequency	Bandwidth (if applicable)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
GSM 850 EGPRS 2 Slots Codec Bit Rate: 20 kbps	128 824.2 MHz	N/A	LAT 1	z (Axial)	6.45	-37.18	-50.83	2.00	43.63	T4	-1.1, 0.4, 3.7
				y (Transversal)	-5.09	-38.76	-50.81		33.67	T4	-1.3, -8.7, 3.7
	190 836.6 MHz	N/A	LAT 1	z (Axial)	6.12	-16.51	-50.83	2.00	43.33	T4	-1.2, 0.4, 3.7
				y (Transversal)	-5.29	-18.73	-50.81		36.66	T4	-1.2, -8.8, 3.7
	251 848.8 MHz	N/A	LAT 1	z (Axial)	6.48	-39.10	-50.83	2.00	45.58	T4	-1.1, 0.4, 3.7
				y (Transversal)	-5.17	-41.84	-50.81		36.67	T4	-1.3, -8.7, 3.7

W-CDMA Air Interface Investigation:

W-CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Antenna	Bandwidth (if applicable)	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
W-CDMA BII HSPA 32 kbps	9262 1852.4 MHz	LAT 1	N/A	z (Axial)	0.98	-47.13	-50.27	2.00	48.11	T4	-3.8, 2.8, 3.7
				y (Transversal)	-7.02	-45.02	-50.26		38.00	T4	-3.8, -11.9, 3.7
	9400 1880.0 MHz	LAT 1	N/A	z (Axial)	0.72	-24.37	-50.27	2.00	47.80	T4	-3.7, 2.9, 3.7
				y (Transversal)	-7.75	-25.72	-50.26		37.10	T4	-3.7, -11.7, 3.7
	9538 1907.6 MHz	LAT 1	N/A	z (Axial)	0.95	-47.39	-50.27	2.00	48.35	T4	-3.8, 2.8, 3.7
				y (Transversal)	-7.03	-45.01	-50.26		37.98	T4	-3.8, -11.9, 3.7
W-CDMA BV HSPA 32 kbps	4132 826.4 MHz	LAT 1	N/A	z (Axial)	1.22	-46.97	-50.27	2.00	48.18	T4	-3.3, 2.9, 3.7
				y (Transversal)	-5.95	-43.48	-50.26		37.52	T4	-3.2, -9.6, 3.7
	4183 836.6 MHz	LAT 1	N/A	z (Axial)	1.05	-24.27	-50.27	2.00	46.78	T4	-3.3, 2.9, 3.7
				y (Transversal)	-6.38	-24.42	-50.26		37.36	T4	-3.3, -9.6, 3.7
	4233 846.6 MHz	LAT 1	N/A	z (Axial)	-1.33	-45.54	-50.27	2.00	44.20	T4	-3.3, 2.9, 3.7
				y (Transversal)	-8.96	-43.44	-50.26		34.48	T4	-3.2, -9.6, 3.7
W-CDMA BIV HSPA 32 kbps	1312 1712.4 MHz	LAT 1	N/A	z (Axial)	0.75	-47.26	-50.27	2.00	48.01	T4	-3.7, 3.3, 3.7
				y (Transversal)	-6.07	-44.07	-50.26		38.00	T4	-3.8, -9.6, 3.7
	1413 1732.6 MHz	LAT 1	N/A	z (Axial)	0.51	-24.36	-50.27	2.00	47.44	T4	-3.7, 3.3, 3.7
				y (Transversal)	-6.50	-24.19	-50.26		37.69	T4	-3.7, -9.6, 3.7
	1513 1752.6 MHz	LAT 1	N/A	z (Axial)	0.78	-46.03	-50.27	2.00	46.80	T4	-3.7, 3.3, 3.7
				y (Transversal)	-6.02	-43.46	-50.26		37.44	T4	-3.8, -9.6, 3.7

CDMA Air Interface Investigation:

CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Antenna	Bandwidth (if applicable)	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
CDMA B0 Ev-Do Rel. 0 28 kbps	1013 824.7 MHz	UAT 1	N/A	z (Axial)	0.81	-28.11	-50.90	2.00	48.83	T4	-3.7, 2.1, 3.7
				y (Transversal)	-6.25	-28.49	-50.92		39.74	T4	-3.7, -9.6, 3.7
	384 836.52 MHz	UAT 1	N/A	z (Axial)	0.69	-47.83	-50.90	2.00	48.52	T4	-4, 3, 3.7
				y (Transversal)	-5.79	-45.62	-50.92		39.83	T4	-3.6, -9.5, 3.7
	777 848.31 MHz	UAT 1	N/A	z (Axial)	0.97	-48.28	-50.90	2.00	49.25	T4	-3.9, 2, 3.7
				y (Transversal)	-5.89	-45.53	-50.92		39.64	T4	-3.6, -9.4, 3.7
CDMA B0 Ev-Do Rev. A 28 kbps	777 848.31 MHz	UAT 1	N/A	z (Axial)	0.25	-26.74	-50.90	2.00	48.55	T4	-4.2, 2.5, 3.7
				y (Transversal)	-6.02	-27.93	-50.92		39.40	T4	-2.5, -10, 3.7

LTE Air Interface Investigation:

LTE Air Interface Investigation													
Mode:	Antenna	Bandwidth (if applicable)	Channel and Frequency	RB Allocation		Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
LTE Band 25 QPSK 28 kbps	LAT 1	20 MHz	26140 1860 MHz	50	0	z (Axial)	2.67	-39.77	-50.89	2.00	42.45	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.87	-37.85	-50.87		31.99	T4	-0.5, -8.9, 3.7
				1	0	z (Axial)	2.86	-25.01	-50.89	2.00	41.57	T4	-0.8, 0, 3.7
						y (Transversal)	-5.58	-26.07	-50.87		32.11	T4	-0.4, -8.8, 3.7
				1	49	z (Axial)	0.89	-20.61	-50.89	2.00	49.01	T4	-3.7, 2.9, 3.7
						y (Transversal)	-6.41	-28.42	-50.87		37.22	T4	-6.2, -10, 3.7
				1	99	z (Axial)	2.83	-39.09	-50.89	2.00	41.92	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.69	-37.58	-50.87		31.89	T4	-0.5, -8.9, 3.7
				50	0	z (Axial)	2.92	-38.93	-50.89	2.00	41.85	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.71	-37.47	-50.87		31.75	T4	-0.5, -8.9, 3.7
				50	24	z (Axial)	2.80	-43.77	-50.89	2.00	46.58	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.78	-43.65	-50.87		37.87	T4	-0.5, -8.9, 3.7
				50	49	z (Axial)	2.76	-43.60	-50.89	2.00	46.35	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.87	-42.64	-50.87		36.77	T4	-0.5, -8.9, 3.7
				100	0	z (Axial)	2.73	-43.72	-50.89	2.00	46.45	T4	-0.8, 0.1, 3.7
						y (Transversal)	-5.91	-42.38	-50.87		36.47	T4	-0.5, -8.9, 3.7
	50	0	z (Axial)	2.78	-39.93	-50.89	2.00	42.71	T4	-0.8, 0.1, 3.7			
			y (Transversal)	-5.93	-36.99	-50.87		31.07	T4	-0.5, -8.9, 3.7			
LTE Band 25 16QAM 28 kbps	LAT 1	20 MHz	26590 1905 MHz	50	0	z (Axial)	2.78	-23.76	-50.89	2.00	42.06	T4	-0.8, 0.4, 3.7
						y (Transversal)	-5.72	-26.67	-50.87		32.08	T4	-0.8, -8.8, 3.7
LTE Band 25 64QAM 28 kbps	LAT 1	20 MHz	26590 1905 MHz	50	0	z (Axial)	2.74	-39.33	-50.89	2.00	42.07	T4	-1, 0.3, 3.7
						y (Transversal)	-5.74	-37.33	-50.87		31.58	T4	-0.9, -8.6, 3.7
LTE Band 26 QPSK 28 kbps	LAT 1	15 MHz	26965 841.5 MHz	36	0	z (Axial)	2.60	-26.19	-50.89	2.00	42.34	T4	-0.4, 0, 3.7
						y (Transversal)	-5.61	-28.17	-50.87		32.91	T4	0, -8.8, 3.7
LTE Band 12 QPSK 28 kbps	LAT 1	10 MHz	23130 711 MHz	25	0	z (Axial)	2.78	-39.44	-50.89	1.79	42.23	T4	-0.5, 0, 3.7
						y (Transversal)	-5.74	-38.42	-50.87		32.68	T4	-0.2, -8.8, 3.7

Note(s):

For all subsequent tests for LTE-FDD, high channel, QPSK modulation, and 50% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.2.2.

LTE Air Interface Investigation (continued):

LTE Air Interface Investigation													
Mode:	Antenna	Bandwidth (if applicable)	Channel and Frequency	RB Allocation		Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
LTE Band 41 QPSK 28 kbps	LAT 1	20 MHz	39750 2506 MHz	50	0	z (Axial)	2.75	-42.88	-50.89	2.00	45.64	T4	-2.1, 0.5, 3.7
						y (Transversal)	-6.35	-43.16	-50.87		36.81	T4	-3.9, -9, 3.7
			40185 2549.5 MHz	50	0	z (Axial)	2.72	-42.20	-50.89	2.00	44.92	T4	-2.1, 0.5, 3.7
						y (Transversal)	-6.32	-43.42	-50.87		37.10	T4	-3.9, -9, 3.7
			40620 2593 MHz	1	0	z (Axial)	2.42	-21.28	-50.89	1.98	43.62	T4	-2.1, 0.4, 3.7
						y (Transversal)	-6.67	-22.51	-50.87		36.83	T4	-3.7, -9.2, 3.7
				1	49	z (Axial)	0.72	-24.50	-50.89	2.00	47.08	T4	-3.7, 2.9, 3.7
						y (Transversal)	-7.84	-25.63	-50.87		36.67	T4	-6.2, -10, 3.7
				1	99	z (Axial)	2.57	-41.37	-50.89	2.00	43.94	T4	-2.1, 0.5, 3.7
						y (Transversal)	-6.33	-43.50	-50.87		37.16	T4	-3.9, -9, 3.7
			40620 2593 MHz	50	0	z (Axial)	0.73	-42.72	-50.89	2.00	43.45	T4	-2.1, 0.4, 3.7
						y (Transversal)	-7.56	-43.77	-50.87		36.21	T4	-3.7, -9.2, 3.7
				50	24	z (Axial)	0.74	-42.60	-50.89	2.00	43.34	T4	-2.1, 0.4, 3.7
						y (Transversal)	-7.57	-44.45	-50.87		36.88	T4	-3.7, -9.2, 3.7
			50	49	z (Axial)	0.75	-42.87	-50.89	2.00	43.62	T4	-2.1, 0.4, 3.7	
					y (Transversal)	-7.61	-43.95	-50.87		36.34	T4	-3.7, -9.2, 3.7	
			41055 2636.5 MHz	50	0	z (Axial)	2.68	-42.06	-50.89	2.00	44.73	T4	-2.1, 0.5, 3.7
						y (Transversal)	-6.31	-43.78	-50.87		37.47	T4	-3.9, -9, 3.7
41490 2680 MHz	50	0	z (Axial)	2.66	-42.16	-50.89	2.00	44.82	T4	-2.1, 0.5, 3.7			
			y (Transversal)	-6.39	-43.24	-50.87		36.85	T4	-3.9, -9, 3.7			
41490 2680 MHz	50	0	z (Axial)	2.78	-41.83	-50.89	2.00	44.60	T4	-2.1, 0.5, 3.7			
			y (Transversal)	-6.29	-41.91	-50.87		35.63	T4	-3.9, -9, 3.7			
LTE Band 41 QPSK 28 kbps	LAT 1	15 MHz	41490 2680 MHz	36	0	z (Axial)	2.94	-22.40	-50.89	2.00	44.01	T4	-0.8, 0, 3.7
						y (Transversal)	-6.18	-22.76	-50.87		36.25	T4	-1.7, -10, 3.7
LTE Band 41 16QAM 28 kbps	LAT 1	10 MHz	41490 2680 MHz	25	0	z (Axial)	1.91	-23.13	-50.90	2.00	45.80	T4	-3.3, 0.4, 3.7
						y (Transversal)	-5.96	-23.46	-50.92		37.22	T4	-3.3, -9.6, 3.7
LTE Band 41 16QAM 28 kbps	LAT 1	20 MHz	41490 2680 MHz	50	0	z (Axial)	1.91	-24.49	-50.90	2.00	45.42	T4	-3.3, 0.4, 3.7
						y (Transversal)	-5.73	-23.99	-50.92		37.46	T4	-3.3, -8.8, 3.7
LTE Band 41 64QAM 28 kbps	LAT 1	20 MHz	41490 2680 MHz	50	0	z (Axial)	0.33	-24.71	-50.90	2.00	48.10	T4	-3.7, 3.7, 3.7
						y (Transversal)	-5.75	-26.51	-50.92		38.06	T4	-2.5, -9.6, 3.7

Note(s):

For all subsequent tests for LTE-TDD, high channel, QPSK modulation, and 50% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.2.2.

Wi-Fi Air Interface Investigation:

Wi-Fi Air Interface Investigation												
Mode:	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
802.11b 48 kbps	6 2437 MHz	LAT 3	CCK	5.5 Mbps	z (Axial)	1.96	-23.38	-50.27	2.00	46.04	T4	-3.3, 2.1, 3.7
					y (Transversal)	-7.74	-22.88	-50.26		38.69	T4	-4.2, -11.7, 3.7
				11 Mbps	z (Axial)	2.10	-45.20	-50.27	2.00	47.31	T4	-3.5, 2.2, 3.7
					y (Transversal)	-6.82	-45.48	-50.26		38.66	T4	-4.1, -11.5, 3.7
802.11g 48 kbps	6 2437 MHz	LAT 3	DSSS	1 Mbps	z (Axial)	2.25	-25.60	-50.27	2.00	47.13	T4	-3.3, 1.2, 3.7
					y (Transversal)	-7.53	-24.74	-50.26		40.06	T4	-3.7, -11.7, 3.7
			QPSK	12 Mbps	z (Axial)	2.68	-46.26	-50.27	2.00	48.94	T4	-3.3, 1.3, 3.7
					y (Transversal)	-6.86	-47.99	-50.26		41.14	T4	-3.9, -11.6, 3.7
			64QAM	54 Mbps	z (Axial)	2.67	-46.14	-50.27	2.00	48.81	T4	-3.3, 1.3, 3.7
					y (Transversal)	-6.88	-48.01	-50.26		41.13	T4	-3.9, -11.6, 3.7
802.11n 48 kbps	6 2437 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	2.63	-24.48	-50.27	2.00	46.59	T4	-2.1, 1.7, 3.7
					y (Transversal)	-7.21	-20.17	-50.26		39.92	T4	-0.8, -12.5, 3.7
			MCS3	26 Mbps	z (Axial)	2.74	-45.04	-50.27	2.00	47.78	T4	-2.2, 1.8, 3.7
					y (Transversal)	-7.11	-46.97	-50.26		39.86	T4	-0.9, -12.5, 3.7
			MCS7	65 Mbps	z (Axial)	2.79	-45.64	-50.27	2.00	48.44	T4	-2.2, 1.8, 3.7
					y (Transversal)	-7.07	-47.44	-50.26		40.37	T4	-0.9, -12.5, 3.7
802.11ac 48 kbps	6 2437 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	1.17	-28.91	-50.27	2.00	49.04	T4	-3.7, 2.1, 3.7
					y (Transversal)	-6.31	-27.90	-50.19		39.16	T4	-3.3, -9.2, 3.7
			MCS4	39 Mbps	z (Axial)	0.95	-47.33	-50.27	2.00	48.29	T4	-3.8, 2.3, 3.7
					y (Transversal)	-5.99	-45.62	-50.19		39.63	T4	-3.2, -9.1, 3.7
			MCS8	78 Mbps	z (Axial)	1.19	-48.12	-50.27	2.00	49.31	T4	-3.8, 2.3, 3.7
					y (Transversal)	-5.97	-45.23	-50.19		39.26	T4	-3.2, -9.1, 3.7
802.11ax 48 kbps	6 2437 MHz	LAT 3	MCS0	7.3 Mbps	z (Axial)	1.03	-29.06	-50.27	2.00	48.93	T4	-3.3, 2.5, 3.7
					y (Transversal)	-6.60	-28.54	-50.19		39.25	T4	-3.7, -8.8, 3.7
			MCS5	58.5 Mbps	z (Axial)	1.03	-47.42	-50.27	2.00	48.45	T4	-3.5, 2.7, 3.7
					y (Transversal)	-6.21	-45.56	-50.19		39.35	T4	-3.6, -8.9, 3.7
			MCS9	97.5 Mbps	z (Axial)	1.07	-48.27	-50.27	2.00	49.34	T4	-3.5, 2.7, 3.7
					y (Transversal)	-6.19	-45.48	-50.19		39.29	T4	-3.6, -8.9, 3.7
802.11a 48 kbps	36 5180 MHz	LAT 3	QPSK	18 Mbps	z (Axial)	0.87	-27.15	-50.27	2.00	47.59	T4	-2.5, 3.3, 3.7
					y (Transversal)	-7.16	-28.80	-50.19		38.94	T4	-4.2, -10, 3.7
			64QAM	54 Mbps	z (Axial)	1.14	-47.04	-50.27	2.00	48.18	T4	-2.4, 3.4, 3.7
					y (Transversal)	-6.62	-45.75	-50.19		39.13	T4	-4, -10, 3.7
802.11n 20 MHz 48 kbps	36 5180 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	1.12	-27.88	-50.27	2.00	46.94	T4	-1.2, 3.3, 3.7
					y (Transversal)	-7.34	-27.29	-50.19		38.51	T4	-4.2, -10, 3.7
			MCS3	26 Mbps	z (Axial)	1.36	-45.75	-50.27	2.00	47.11	T4	-1, 3.3, 3.7
					y (Transversal)	-7.00	-45.41	-50.19		38.40	T4	-4.3, -9.9, 3.7
			MCS7	65 Mbps	z (Axial)	1.27	-46.01	-50.27	2.00	47.27	T4	-1, 3.3, 3.7
					y (Transversal)	-6.97	-45.52	-50.19		38.55	T4	-4.3, -9.9, 3.7
802.11n 40 MHz 48 kbps	38 5190 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	1.95	-28.44	-50.27	2.00	48.47	T4	0, 1.7, 3.7
					y (Transversal)	-7.45	-28.40	-50.19		39.54	T4	-4.2, -10.4, 3.7
			MCS3	54 Mbps	z (Axial)	1.93	-45.23	-50.27	2.00	47.16	T4	-0.1, 1.8, 3.7
					y (Transversal)	-6.92	-46.92	-50.19		40.00	T4	-4.1, -10.2, 3.7
			MCS7	135 Mbps	z (Axial)	1.90	-46.30	-50.27	2.00	48.20	T4	-0.1, 1.8, 3.7
					y (Transversal)	-6.89	-47.30	-50.19		40.41	T4	-4.1, -10.2, 3.7
802.11ac 20 MHz 48 kbps	36 5180 MHz	LAT 3	MCS0	6.5 Mbps	z (Axial)	0.90	-26.92	-50.27	2.00	46.58	T4	-0.8, 3.3, 3.7
					y (Transversal)	-7.61	-26.61	-50.19		38.83	T4	-4.6, -10.4, 3.7
			MCS4	39 Mbps	z (Axial)	0.99	-45.21	-50.27	2.00	46.20	T4	-0.9, 3.3, 3.7
					y (Transversal)	-6.93	-46.09	-50.19		39.16	T4	-4.4, -10.2, 3.7
			MCS8	78 Mbps	z (Axial)	1.04	-45.42	-50.27	2.00	46.46	T4	-0.9, 3.3, 3.7
					y (Transversal)	-6.92	-45.92	-50.19		39.00	T4	-4.4, -10.2, 3.7
802.11ac 40 MHz 48 kbps	38 5190 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	1.17	-27.01	-50.27	2.00	47.04	T4	-0.8, 2.9, 3.7
					y (Transversal)	-7.66	-27.89	-50.19		38.45	T4	-5.4, -9.6, 3.7
			MCS5	108 Mbps	z (Axial)	1.25	-46.30	-50.27	2.00	47.55	T4	-1, 3.1, 3.7
					y (Transversal)	-7.27	-46.51	-50.19		39.24	T4	-5.3, -9.6, 3.7
			MCS9	180 Mbps	z (Axial)	1.16	-45.95	-50.27	2.00	47.11	T4	-1, 3.1, 3.7
					y (Transversal)	-7.23	-46.39	-50.19		39.16	T4	-5.3, -9.6, 3.7

Wi-Fi Air Interface Investigation (continued):

Wi-Fi Air Interface Investigation												
Mode:	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
802.11ac 80 MHz 48 kbps	42 5210 MHz	LAT 3	MCS0	13.5 Mbps	z (Axial)	0.86	-27.94	-50.27	2.00	46.91	T4	-1.2, 3.3, 3.7
					y (Transversal)	-7.29	-27.88	-50.19		38.38	T4	-4.6, -9.6, 3.7
			MCS5	108 Mbps	z (Axial)	1.07	-46.26	-50.27	2.00	47.33	T4	-1.3, 3.2, 3.7
					y (Transversal)	-6.89	-46.15	-50.19		39.26	T4	-4.5, -9.6, 3.7
			MCS9	180 Mbps	z (Axial)	1.07	-46.59	-50.27	2.00	47.66	T4	-1.3, 3.2, 3.7
					y (Transversal)	-6.83	-45.90	-50.19		39.07	T4	-4.5, -9.6, 3.7
802.11ax 20 MHz 48 kbps	36 5180 MHz	LAT 3	MCS0	8.6 Mbps	z (Axial)	1.77	-28.37	-50.27	2.00	47.93	T4	-0.4, 2.9, 3.7
					y (Transversal)	-7.80	-27.03	-50.19		40.13	T4	-3.7, -12.5, 3.7
			MCS6	77 Mbps	z (Axial)	1.77	-45.65	-50.27	2.00	47.42	T4	-0.3, 3, 3.7
					y (Transversal)	-7.18	-47.75	-50.19		40.57	T4	-3.6, -12.6, 3.7
			MCS11	143 Mbps	z (Axial)	1.75	-45.98	-50.27	2.00	47.73	T4	-0.3, 3, 3.7
					y (Transversal)	-7.23	-47.86	-50.19		40.64	T4	-3.6, -12.6, 3.7
802.11ax 40 MHz 48 kbps	38 5190 MHz	LAT 3	MCS0	17.2 Mbps	z (Axial)	1.47	-27.85	-50.27	2.00	47.62	T4	-0.8, 3.3, 3.7
					y (Transversal)	-6.95	-26.08	-50.19		40.30	T4	-3.7, -11.3, 3.7
			MCS6	155 Mbps	z (Axial)	1.43	-45.59	-50.27	2.00	47.02	T4	-0.6, 3.3, 3.7
					y (Transversal)	-6.47	-46.71	-50.19		40.25	T4	-4, -11.1, 3.7
			MCS11	287 Mbps	z (Axial)	1.50	-45.09	-50.27	2.00	46.59	T4	-0.6, 3.3, 3.7
					y (Transversal)	-6.48	-46.87	-50.19		40.39	T4	-4, -11.1, 3.7
802.11ax 80 MHz 48 kbps	42 5210 MHz	LAT 3	MCS0	36 Mbps	z (Axial)	2.08	-26.73	-50.27	2.00	47.59	T4	-2.1, 3.3, 3.7
					y (Transversal)	-6.21	-27.45	-50.19		39.75	T4	-5, -9.2, 3.7
			MCS6	324 Mbps	z (Axial)	2.07	-45.85	-50.27	2.00	47.93	T4	-2.2, 3.5, 3.7
					y (Transversal)	-5.90	-45.70	-50.19		39.80	T4	-4.8, -9.3, 3.7
			MCS11	600 Mbps	z (Axial)	2.03	-45.98	-50.27	2.00	48.01	T4	-2.2, 3.5, 3.7
					y (Transversal)	-5.85	-45.71	-50.19		39.86	T4	-4.8, -9.3, 3.7

Note(s):

1. For all subsequent tests for 2.4 GHz, 802.11b CCK 11 Mbps was used in conjunction with the worst-case bit rate found in §9.2.2.
2. For all subsequent tests for 5 GHz, 802.11ac VHT80 MHz MCS0 13.5 Mbps was used in conjunction with the worst-case bit rate found in §9.2.2.

10. HAC (T-coil) Test Results

As the margin for the worst-case T-rating is greater than T3/T4, no further investigation is required into the technology’s supported channels to affirm the T-rating.

10.1. CMRS

GSM/W-CDMA/CDMA:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
GSM 850 Voice Coder Speechcodec Low	190 836.6 MHz	N/A	LAT 1	z (Axial)	4.65	-21.28	-50.49	2.00	41.30	T4	-1.2, 0, 3.7	1 - 3
				y (Transversal)	-4.95	-26.18	-50.49	38.87	T4	-4.2, -9.2, 3.7		
GSM 1900 ² Voice Coder Speechcodec Low	661 1880 MHz	N/A	LAT 1	z (Axial)	4.64	-36.02	-50.49	2.00	40.66	T4	-1.1, 0.1, 3.7	4 - 6
				y (Transversal)	-4.34	-43.43	-50.49	39.09	T4	-4, -9, 3.7		
W-CDMA BII AMR-WB Bit rate: 6.6 kbps	9400 1880 MHz	N/A	LAT 1	z (Axial)	5.00	-22.96	-50.50	2.00	49.20	T4	-1.7, 3.3, 3.7	7 - 9
				y (Transversal)	-4.32	-26.41	-50.53	40.81	T4	-4.2, -9.6, 3.7		
W-CDMA BIV AMR-WB Bit rate: 6.6 kbps	1413 1732.6 MHz	N/A	LAT 1	z (Axial)	4.41	-24.76	-50.50	0.62	48.91	T4	-2.1, 4.2, 3.7	10 - 12
				y (Transversal)	-3.83	-25.80	-50.53	40.96	T4	-4.2, -8.8, 3.7		
W-CDMA BV AMR-WB Bit rate: 6.6 kbps	4183 836.6 MHz	N/A	LAT 1	z (Axial)	5.18	-24.05	-50.50	1.13	48.60	T4	-0.8, 3.3, 3.7	13 - 15
				y (Transversal)	-4.08	-25.58	-50.53	40.89	T4	-3.3, -10, 3.7		
CDMA2000 BC0 ² RC1 / SO3 Full Fr Voice Coder: 8K EVRC Low	384 836.52 MHz	N/A	UAT 1	z (Axial)	-0.91	-47.99	-50.45	2.00	47.09	T4	-3.1, 3.9, 3.7	16 - 18
				y (Transversal)	-6.87	-46.89	-50.48	40.01	T4	0.2, -8.9, 3.7		
CDMA2000 BC1 ² RC1 / SO3 Full Fr Voice Coder: 8K EVRC Low	600 1880 MHz	N/A	UAT 1	z (Axial)	-0.20	-47.94	-50.45	2.00	47.75	T4	-3.1, 3.9, 3.7	19 - 21
				y (Transversal)	-7.18	-45.00	-50.48	37.83	T4	0.2, -8.9, 3.7		
CDMA2000 BC10 ² RC1 / SO3 Full Fr Voice Coder: 8K EVRC Low	580 820.5 MHz	N/A	UAT 1	z (Axial)	0.15	-48.39	-50.45	2.00	48.54	T4	-3.1, 3.9, 3.7	22 - 24
				y (Transversal)	-7.16	-46.95	-50.48	39.80	T4	0.2, -8.9, 3.7		

VoLTE:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	RB Allocation		Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
LTE Band 2 QPSK EVS Bit rate: 5.9 kbps	18900 1880 MHz	20 MHz	LAT 1	50	24	z (Axial)	3.90	-24.48	-50.52	2.00	47.44	T4	-0.8, 3.7, 3.7	25 - 27
						y (Transversal)	-5.11	-28.03	-50.51		40.86	T4	-4.2, -9.2, 3.7	
LTE Band 4 QPSK EVS Bit rate: 5.9 kbps	20175 1732.5 MHz	20 MHz	LAT 1	50	24	z (Axial)	4.87	-23.44	-50.52	2.00	47.32	T4	-0.4, 1.2, 3.7	28 - 30
						y (Transversal)	-3.58	-28.05	-50.51		39.28	T4	-0.4, -9.2, 3.7	
LTE Band 5 QPSK EVS Bit rate: 5.9 kbps	20525 836.5 MHz	10 MHz	LAT 1	25	12	z (Axial)	4.96	-27.31	-50.52	2.00	47.14	T4	-0.4, -0.4, 3.7	31 - 33
						y (Transversal)	-3.10	-29.25	-50.51		40.53	T4	-0.4, -8.3, 3.7	
LTE Band 7 QPSK EVS Bit rate: 5.9 kbps	21100 2535 MHz	20 MHz	LAT 1	50	24	z (Axial)	4.39	-22.50	-50.52	2.00	48.00	T4	-0.4, 2.5, 3.7	34 - 36
						y (Transversal)	-7.31	-27.16	-50.53		38.54	T4	-8.3, -8.8, 3.7	
LTE Band 12 QPSK EVS Bit rate: 5.9 kbps	23095 707.5 MHz	10 MHz	LAT 1	25	12	z (Axial)	4.68	-23.60	-50.52	2.00	47.45	T4	-0.4, 0, 3.7	37 - 39
						y (Transversal)	-5.78	-28.30	-50.50		39.95	T4	-5.4, -8.3, 3.7	
LTE Band 13 QPSK EVS Bit rate: 5.9 kbps	23230 782 MHz	10 MHz	LAT 1	25	12	z (Axial)	4.24	-28.81	-50.52	1.98	47.43	T4	-0.4, 0.4, 3.7	40 - 42
						y (Transversal)	-5.55	-26.48	-50.53		40.29	T4	-3.7, -10, 3.7	
LTE Band 17 QPSK EVS Bit rate: 5.9 kbps	23790 710 MHz	10 MHz	LAT 1	25	12	z (Axial)	3.04	-24.52	-50.52	2.00	47.12	T4	-0.4, 2.9, 3.7	43 - 45
						y (Transversal)	-4.89	-27.52	-50.53		40.37	T4	-4.6, -9.2, 3.7	
LTE Band 25 QPSK ² EVS Bit rate: 5.9 kbps	26365 1882.5 MHz	20 MHz	LAT 1	50	24	z (Axial)	3.67	-42.88	-50.52	2.00	46.54	T4	0, 3.2, 3.7	46 - 48
						y (Transversal)	-5.20	-42.60	-50.50		37.40	T4	-4.4, -8.7, 3.7	
LTE Band 26 QPSK EVS Bit rate: 5.9 kbps	26865 831.5 MHz	15 MHz	LAT 1	36	20	z (Axial)	2.32	-26.06	-50.52	2.00	46.67	T4	-0.4, 4.2, 3.7	49 - 51
						y (Transversal)	-4.52	-29.61	-50.50		39.67	T4	-0.4, -9.6, 3.7	
LTE Band 30 QPSK EVS Bit rate: 5.9 kbps	27710 2310 MHz	10 MHz	LAT 1	25	12	z (Axial)	3.91	-22.82	-50.52	2.00	46.16	T4	0, 0, 3.7	52 - 54
						y (Transversal)	-6.34	-25.92	-50.53		38.78	T4	-3.3, -10.4, 3.7	
LTE Band 41 QPSK ² EVS Bit rate: 5.9 kbps	40620 2593 MHz	20 MHz	LAT 1	100	0	z (Axial)	3.29	-40.78	-50.52	2.00	44.07	T4	-0.6, 0.8, 3.7	55 - 57
						y (Transversal)	-6.35	-43.40	-50.49		37.04	T4	-3.8, -9.2, 3.7	
LTE Band 48 QPSK EVS Bit rate: 5.9 kbps	55990 3625 MHz	20 MHz	UAT 2	100	0	z (Axial)	5.40	-23.64	-50.24	2.00	46.46	T4	-0.4, 2.5, 3.7	58 - 60
						y (Transversal)	-2.83	-26.04	-50.25		40.90	T4	-4.2, -8.8, 3.7	
LTE Band 66 QPSK EVS Bit rate: 5.9 kbps	132322 1745 MHz	20 MHz	LAT 1	50	24	z (Axial)	1.76	-25.94	-50.24	2.00	46.33	T4	-7.5, 0.4, 3.7	61 - 63
						y (Transversal)	-3.07	-26.81	-50.25		40.33	T4	-0.8, -10.4, 3.7	

Note(s):

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

VoWi-Fi:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
802.11b ² AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	20 MHz (CCK 1 Mbps)	LAT 3	z (Axial)	4.09	-43.92	-50.24	1.92	48.01	T4	-1.1, 1.6, 3.7	64 - 66
				y (Transversal)	-3.84	-43.24	-50.25		39.40	T4	-1.4, -8.7, 3.7	
802.11a AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	20 MHz (BPSK 6 Mbps)	LAT 3	z (Axial)	3.27	-30.06	-50.20	1.84	48.29	T4	-0.8, 2.9, 3.7	67 - 69
				y (Transversal)	-4.82	-29.88	-50.21		42.49	T4	-0.8, -11.3, 3.7	
	52 5260 MHz	20 MHz (BPSK 6 Mbps)	LAT 3	z (Axial)	3.35	-28.70	-50.27	1.73	47.60	T4	-1.7, 2.5, 3.7	70 - 72
				y (Transversal)	-4.93	-28.75	-50.26		40.99	T4	-3.3, -9.6, 3.7	
	100 ² 5500 MHz	20 MHz (BPSK 6 Mbps)	LAT 3	z (Axial)	3.53	-44.29	-50.27	2.00	47.81	T4	-1.6, 2.6, 3.7	73 - 75
				y (Transversal)	-4.66	-45.82	-50.26		41.16	T4	-3.4, -9.6, 3.7	
	149 ² 5745 MHz	20 MHz (BPSK 6 Mbps)	LAT 3	z (Axial)	3.50	-44.14	-50.27	1.74	47.64	T4	-1.6, 2.6, 3.7	76 - 78
				y (Transversal)	-4.78	-45.71	-50.26		40.93	T4	-3.4, -9.6, 3.7	

Note(s):

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

10.2. OTT Application

GSM/W-CDMA/CDMA:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
GSM850 ² EDGE 20 kbps	128 824.2 MHz	N/A	LAT 1	z (Axial)	6.45	-37.18	-50.83	2.00	43.63	T4	-1.1, 0.4, 3.7	1 - 3
				y (Transversal)	-5.09	-38.76	-50.81	33.67	T4	-1.3, -8.7, 3.7		
GSM1900 EDGE 20 kbps	512 1850.2 MHz	N/A	LAT 1	z (Axial)	6.00	-16.91	-50.83	2.00	43.84	T4	-1.2, 0.4, 3.7	4 - 6
				y (Transversal)	-6.14	-19.40	-50.81	36.53	T4	-3.7, -8.3, 3.7		
W-CDMA B1 HSPA 32 kbps	9400 1880 MHz	N/A	LAT 1	z (Axial)	0.72	-24.37	-50.27	2.00	47.80	T4	-3.7, 2.9, 3.7	7 - 9
				y (Transversal)	-7.75	-25.72	-50.26	37.10	T4	-3.7, -11.7, 3.7		
W-CDMA B1V ² HSPA 32 kbps	1513 1752.6 MHz	N/A	LAT 1	z (Axial)	0.78	-46.03	-50.27	2.00	46.80	T4	-3.7, 3.3, 3.7	10 - 12
				y (Transversal)	-6.02	-43.46	-50.26	37.44	T4	-3.8, -9.6, 3.7		
W-CDMA B1V ² HSPA 32 kbps	4132 826.4 MHz	N/A	LAT 1	z (Axial)	-1.33	-45.54	-50.27	2.00	44.20	T4	-3.3, 2.9, 3.7	13 - 15
				y (Transversal)	-8.96	-43.44	-50.26	34.48	T4	-3.2, -9.6, 3.7		
CDMA BC0 Ev-Do Rev. A 28 kbps	777 848.31 MHz	N/A	UAT 1	z (Axial)	0.25	-26.74	-50.90	2.00	48.55	T4	-4.2, 2.5, 3.7	16 - 18
				y (Transversal)	-6.02	-27.93	-50.92	39.40	T4	-2.5, -10, 3.7		
CDMA BC1 Ev-Do Rev. A 28 kbps	1175 1908.75 MHz	N/A	UAT 1	z (Axial)	0.38	-28.17	-50.90	2.00	48.75	T4	-4.2, 2.1, 3.7	19 - 21
				y (Transversal)	-6.08	-27.19	-50.92	39.40	T4	-1.7, -10.4, 3.7		
CDMA BC10 ² Ev-Do Rev. A 28 kbps	670 822.75 MHz	N/A	UAT 1	z (Axial)	0.65	-47.96	-50.90	2.00	48.61	T4	-4.1, 2.2, 3.7	22 - 24
				y (Transversal)	-5.77	-45.49	-50.92	39.72	T4	-1.8, -10.3, 3.7		

LTE:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	RB Allocation	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #	
LTE Band 2 QPSK 28 kbps	19100 1900 MHz	20 MHz	50	0	LAT 1	z (Axial)	2.63	-24.38	-50.89	2.00	48.22	T4	-1.2, 0.4, 3.7	25 - 27
						y (Transversal)	-6.21	-26.40	-50.87	38.51	T4	-0.4, -10, 3.7		
LTE Band 4 QPSK ² 28 kbps	20300 1745 MHz	20 MHz	50	0	LAT 1	z (Axial)	2.49	-45.81	-50.89	2.00	48.29	T4	-1.4, 0.6, 3.7	28 - 30
						y (Transversal)	-6.17	-43.18	-50.87	37.00	T4	-0.6, -10, 3.7		
LTE Band 5 QPSK ² 28 kbps	20600 844 MHz	10 MHz	25	0	LAT 1	z (Axial)	2.45	-45.78	-50.89	2.00	48.24	T4	-1.4, 0.6, 3.7	31 - 33
						y (Transversal)	-6.12	-44.05	-50.87	37.93	T4	-0.6, -10, 3.7		
LTE Band 7 QPSK ² 28 kbps	21350 2560 MHz	20 MHz	50	0	LAT 1	z (Axial)	2.48	-45.81	-50.89	2.00	48.29	T4	-1.4, 0.6, 3.7	34 - 36
						y (Transversal)	-6.22	-43.88	-50.87	37.66	T4	-0.6, -10, 3.7		
LTE Band 12 QPSK ² 28 kbps	23130 711 MHz	10 MHz	25	0	LAT 1	z (Axial)	2.78	-39.44	-50.89	1.79	42.23	T4	-0.5, 0, 3.7	37 - 39
						y (Transversal)	-5.74	-38.42	-50.87	32.68	T4	-0.2, -8.8, 3.7		
LTE Band 13 QPSK 28 kbps	23230 782 MHz	10 MHz	25	0	LAT 1	z (Axial)	0.88	-20.84	-50.89	2.00	48.19	T4	-3.3, 2.5, 3.7	40 - 42
						y (Transversal)	-6.95	-27.58	-50.87	39.29	T4	-4.2, -9.2, 3.7		
LTE Band 17 QPSK ² 28 kbps	23790 710 MHz	10 MHz	25	0	LAT 1	z (Axial)	0.94	-47.91	-50.89	2.00	48.85	T4	-3.6, 2.7, 3.7	43 - 45
						y (Transversal)	-6.47	-46.00	-50.87	39.53	T4	-4.1, -9, 3.7		
LTE Band 25 QPSK ² 28 kbps	26590 1905 MHz	20 MHz	50	0	LAT 1	z (Axial)	2.78	-39.93	-50.89	2.00	42.71	T4	-0.8, 0.1, 3.7	46 - 48
						y (Transversal)	-5.93	-36.99	-50.87	31.07	T4	-0.5, -8.9, 3.7		
LTE Band 26 QPSK 28 kbps	26965 841.5 MHz	15 MHz	36	0	LAT 1	z (Axial)	2.60	-26.19	-50.89	2.00	42.34	T4	-0.4, 0, 3.7	49 - 51
						y (Transversal)	-5.61	-28.17	-50.87	32.91	T4	0, -8.8, 3.7		
LTE Band 30 QPSK ² 28 kbps	27710 2310 MHz	10 MHz	25	0	LAT 1	z (Axial)	0.92	-47.31	-50.89	2.00	48.23	T4	-3.6, 2.7, 3.7	52 - 54
						y (Transversal)	-6.54	-44.96	-50.87	38.41	T4	-4.1, -9, 3.7		
LTE Band 41 QPSK ² 28 kbps	41490 2680 MHz	20 MHz	50	0	LAT 1	z (Axial)	2.78	-41.83	-50.89	2.00	44.60	T4	-2.1, 0.5, 3.7	55 - 57
						y (Transversal)	-6.29	-41.91	-50.87	35.63	T4	-3.9, -9, 3.7		
LTE Band 48 QPSK 28 kbps	56640 3690 MHz	20 MHz	50	0	UAT 2	z (Axial)	2.80	-24.87	-50.90	2.00	47.13	T4	-0.8, 0, 3.7	58 - 60
						y (Transversal)	-5.95	-24.23	-50.92	37.39	T4	-2.9, -10, 3.7		
LTE Band 66 QPSK ² 28 kbps	132572 1770 MHz	20 MHz	50	0	LAT 1	z (Axial)	0.86	-48.49	-50.89	2.00	49.35	T4	-3.6, 2.7, 3.7	61 - 63
						y (Transversal)	-6.61	-44.60	-50.87	37.99	T4	-4.1, -9, 3.7		

Note(s):

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

Wi-Fi:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
802.11b 48 kbps	6 2437 MHz	20 MHz (CCK 11 Mbps)	LAT 3	z (Axial)	2.10	-45.20	-50.27	2.00	47.31	T4	-3.5, 2.2, 3.7	64 - 66
				y (Transversal)	-6.82	-45.48	-50.26		38.66	T4	-4.1, -11.5, 3.7	
802.11ac 80 MHz 48 kbps	42 5210 MHz	80 MHz (MCS0 13.5 Mbps)	LAT 3	z (Axial)	0.86	-27.94	-50.27	2.00	46.91	T4	-1.2, 3.3, 3.7	67 - 69
				y (Transversal)	-7.29	-27.88	-50.26		38.38	T4	-4.6, -9.6, 3.7	
	58 5290 MHz	80 MHz (MCS0 13.5 Mbps)	LAT 3	z (Axial)	2.46	-26.63	-50.27	2.00	47.07	T4	0, 2.9, 3.7	70 - 72
				y (Transversal)	-7.20	-25.59	-50.26		39.56	T4	-3.3, -12.1, 3.7	
	106 5530 MHz	80 MHz (MCS0 13.5 Mbps)	LAT 3	z (Axial)	2.93	-26.75	-50.27	2.00	46.82	T4	-0.4, 2.1, 3.7	73 - 75
				y (Transversal)	-7.09	-24.09	-50.26		39.80	T4	-4.6, -11.3, 3.7	
	155 5775 MHz	80 MHz (MCS0 13.5 Mbps)	LAT 3	z (Axial)	2.38	-24.55	-50.27	2.00	45.52	T4	-0.4, 2.9, 3.7	76 - 78
				y (Transversal)	-7.26	-23.27	-50.26		40.06	T4	-3.7, -12.1, 3.7	

Note(s):

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

10.3. Worst Case T-Coil Test Plot

Test Laboratory: UL Verification Services Inc. SAR Lab 7

Date: 12/20/2019

GSM

Communication System: UID 0, @EGPRS-FDD (TDMA, 8PSK, 2 slot) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.00037

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1540; Calibrated: 2/18/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM 850 ch 128 ANT 1/y

(transversal) Single Point/ABM SNR(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 37.22

Measure Window Start: 1500ms

Measure Window Length: 1500ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1/ABM2 = 33.67 dB


ABM1 comp = -5.09 dBA/m

BWC Factor = 0.16 dB

Location: -1.3, -8.7, 3.7 mm

ABM2 = -38.76 dBA/m

Location: -1.3, -8.7, 3.7 mm

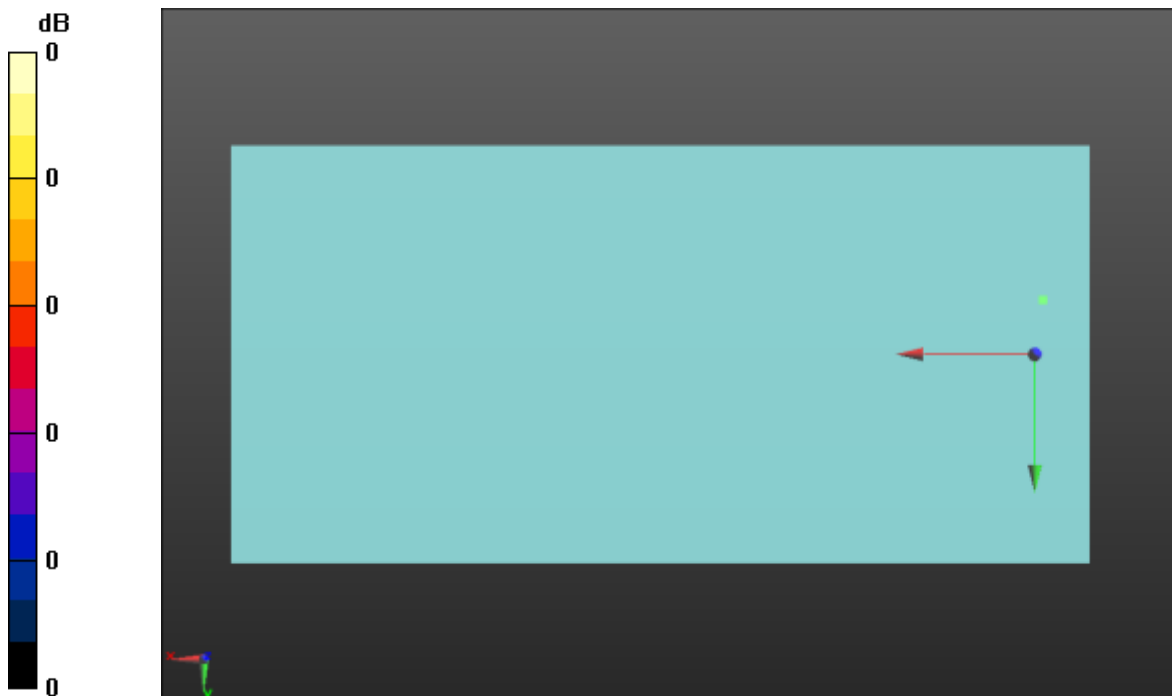

0 dB = 1.000 = 0.00 dB

Appendix

Refer to separated files for the following appendixes

Appendix A: T-Coil Setup Photo

Appendix B: T-Coil Test Plots (CMRS)

Appendix C: T-Coil Test Plots (OTT)

Appendix D: T-Coil Probe Certificates

Appendix E: Adjusted Gain Procedure

END OF REPORT