
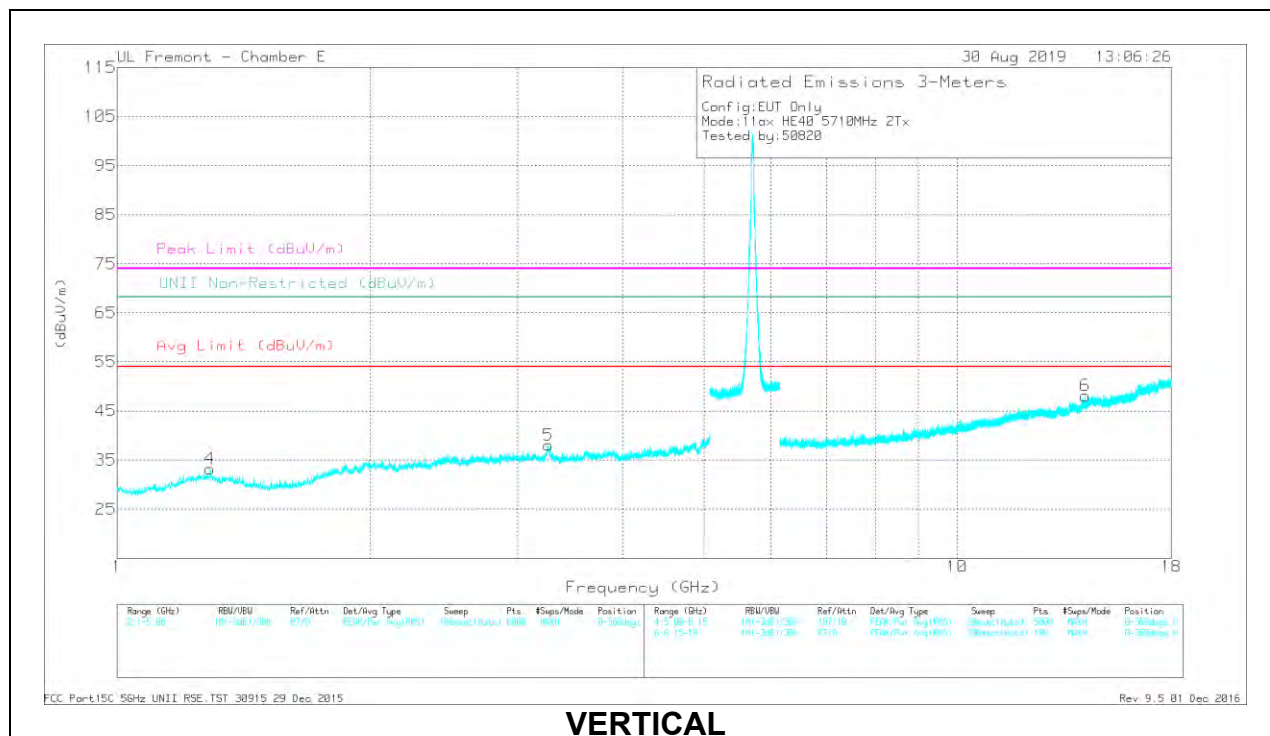


CHANNEL 142 RESULTS

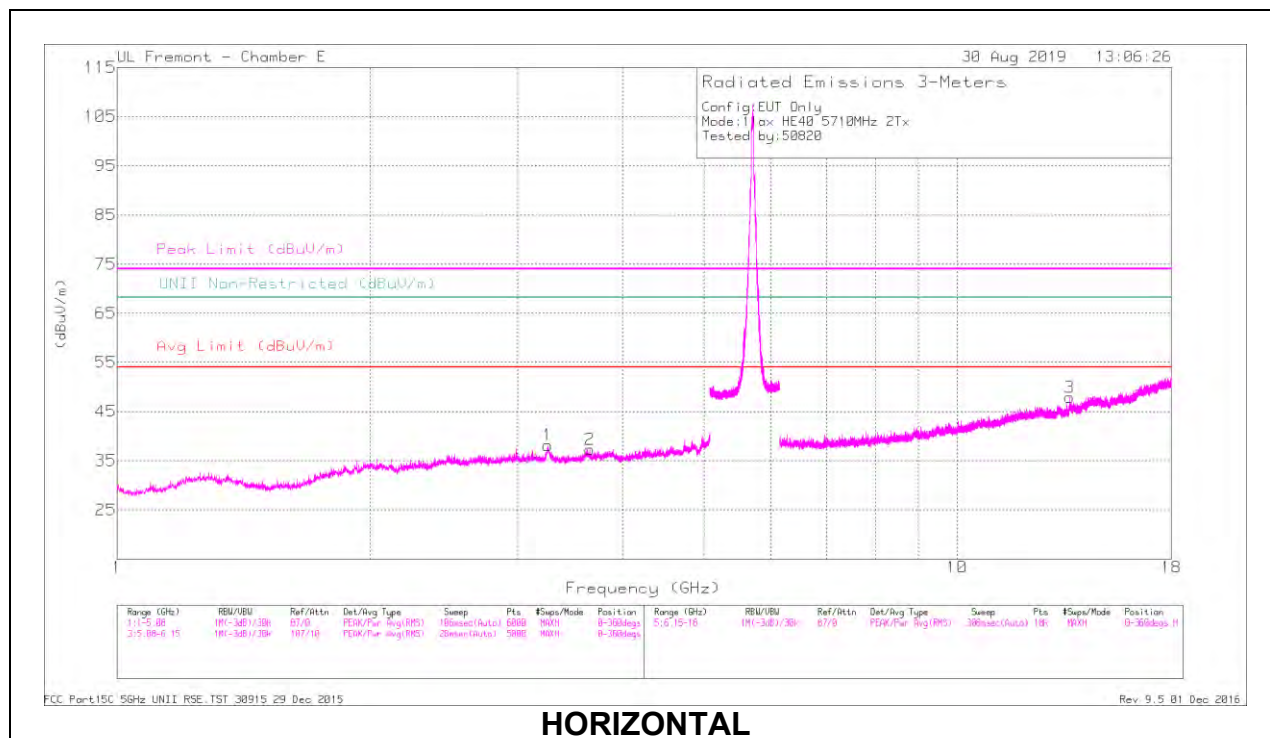

RADIATED EMISSIONS

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.656	43.53	PK-U	33.2	-33.5	43.23	-	-	74	-30.77	-	-	232	333	H
	* 3.655	31.74	ADR	33.2	-33.6	31.34	54	-22.66	-	-	-	-	232	333	H
4	* 1.292	44.69	PK-U	30	-35.4	39.29	-	-	74	-34.71	-	-	261	256	V
	* 1.29	33.14	ADR	30	-35.5	27.64	54	-26.36	-	-	-	-	261	256	V
5	* 3.262	44.97	PK-U	35.1	-34.5	45.57	-	-	74	-28.43	-	-	171	226	V
	* 3.262	32.75	ADR	35.1	-34.5	33.35	54	-20.65	-	-	-	-	171	226	V
1	3.259	44.87	PK-U	35	-34.5	45.37	-	-	-	-	68.2	-22.83	112	105	H
3	13.618	36.8	PK-U	38.6	-21.5	53.9	-	-	-	-	68.2	-14.3	247	267	H
6	14.227	35.35	PK-U	39.1	-21	53.45	-	-	-	-	68.2	-14.75	59	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX UAT2 + LAT3 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

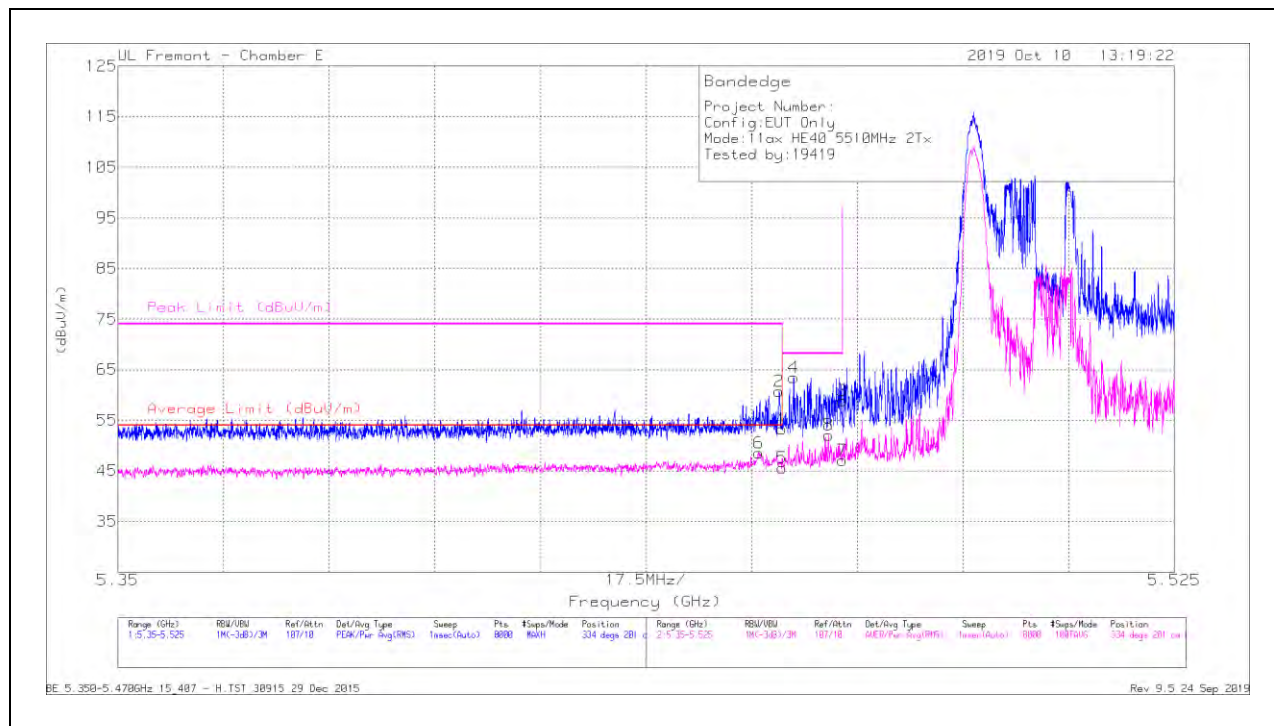


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.96	Pk	34.6	-21.3	53.26	-	-	74	-20.74	334	201	H
2	* 5.45954	47.37	Pk	34.6	-21.3	60.67	-	-	74	-13.33	334	201	H
5	* 5.45998	32.29	RMS	34.6	-21.3	45.59	54	-8.41	-	-	334	201	H
6	* 5.45613	35.29	RMS	34.6	-21.3	48.59	54	-5.41	-	-	334	201	H
4	5.46195	50.21	Pk	34.5	-21.3	63.41	-	-	68.2	-4.79	334	201	H
8	5.4677	38.89	RMS	34.5	-21.3	52.09	-	-	-	-	334	201	H
3	5.46998	45.52	Pk	34.6	-21.3	58.82	-	-	68.2	-9.38	334	201	H
7	5.46998	33.8	RMS	34.6	-21.3	47.1	-	-	-	-	334	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

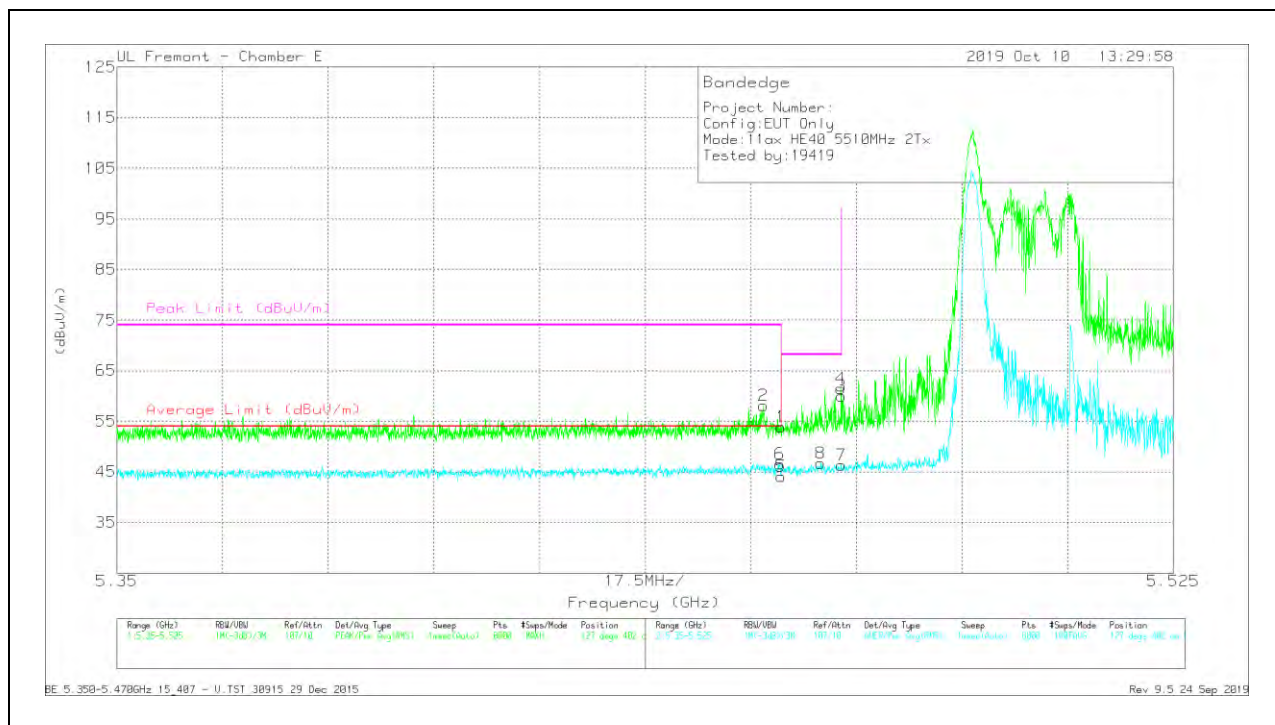

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.54	Pk	34.6	-21.3	53.84	-	-	74	-20.16	127	402	V
2	* 5.45709	44.82	Pk	34.6	-21.3	58.12	-	-	74	-15.88	127	402	V
5	* 5.45998	30.75	RMS	34.6	-21.3	44.05	54	-9.95	-	-	127	402	V
6	* 5.45981	33.26	RMS	34.6	-21.3	46.56	54	-7.44	-	-	127	402	V
8	5.46663	33.53	RMS	34.5	-21.3	46.73	-	-	-	-	127	402	V
4	5.46994	48.21	Pk	34.6	-21.3	61.51	-	-	68.2	-6.69	127	402	V
3	5.46998	46.7	Pk	34.6	-21.3	60	-	-	68.2	-8.2	127	402	V
7	5.46998	33.07	RMS	34.6	-21.3	46.37	-	-	-	-	127	402	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX UAT2 + LAT3 OFDMA MODE – 26 Tones, RU Index 17

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

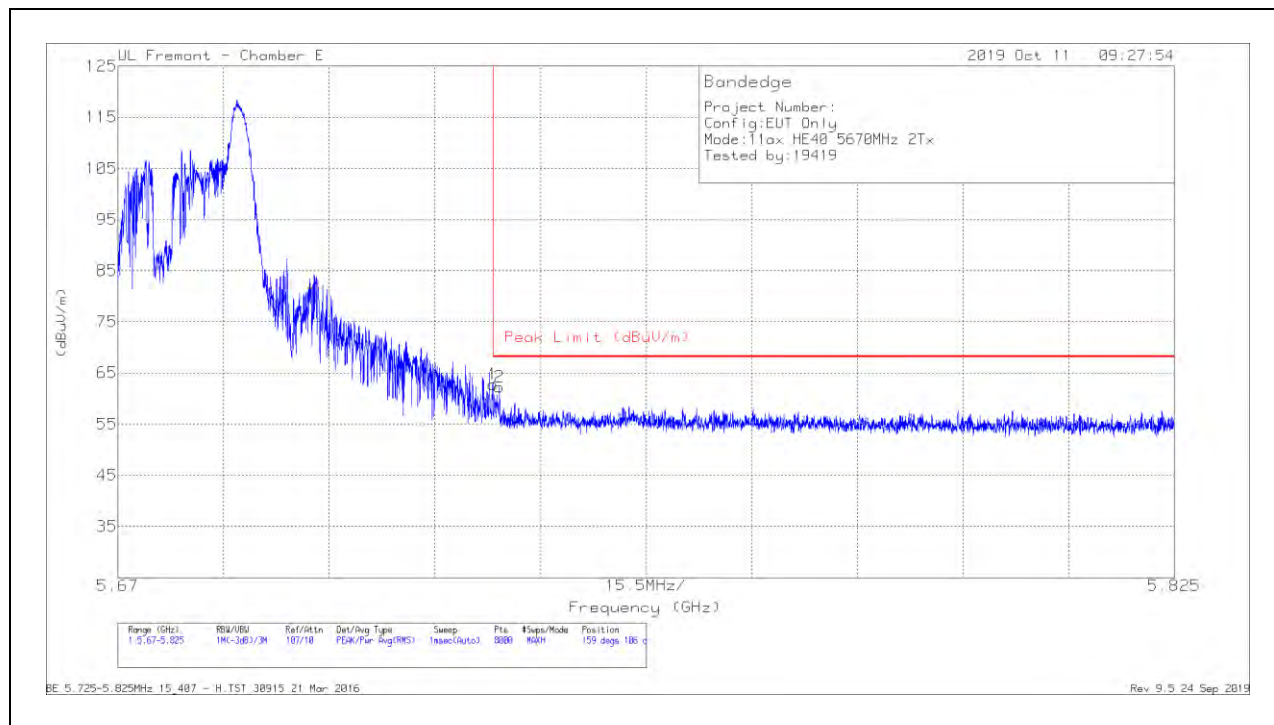

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.89	Pk	34.8	-20.9	62.79	68.2	-5.41	159	106	H
2	5.72596	48.49	Pk	34.7	-20.9	62.29	68.2	-5.91	159	106	H

Pk - Peak detector

VERTICAL RESULT

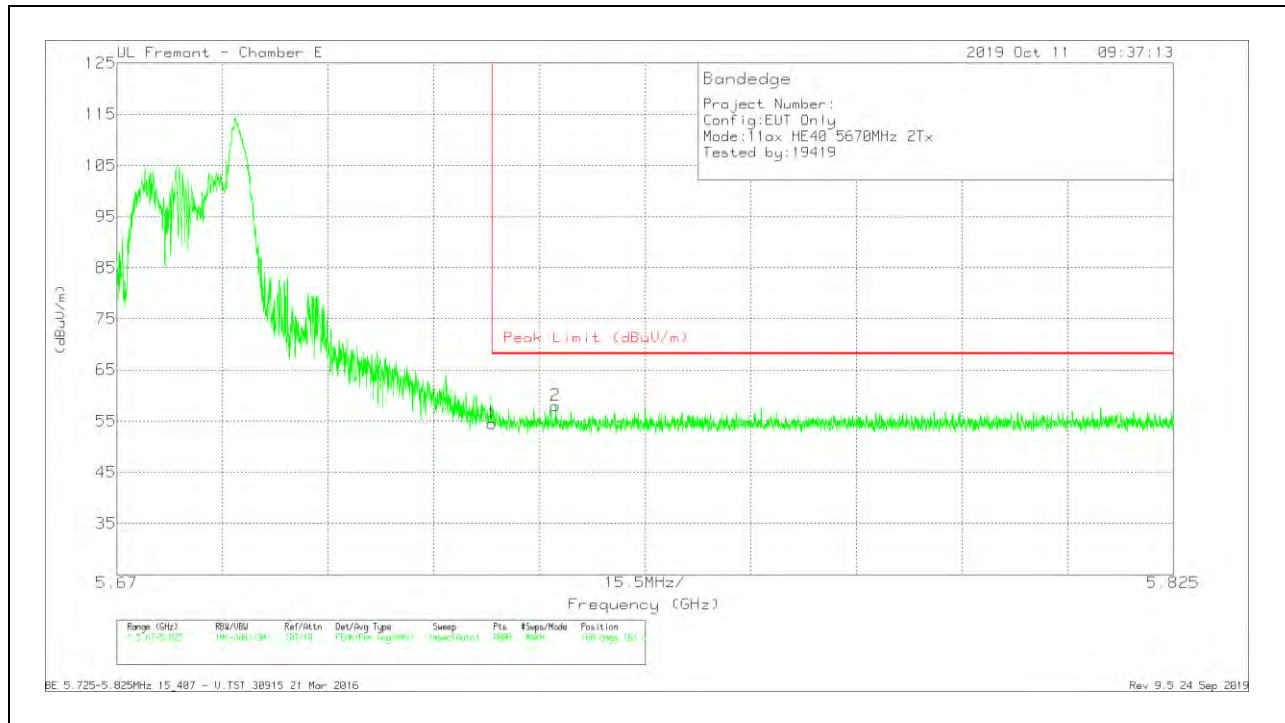



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.6	Pk	34.8	-20.9	54.5	68.2	-13.7	160	163	V
2	5.73439	44.04	Pk	34.9	-20.9	58.04	68.2	-10.16	160	163	V

Pk - Peak detector

2TX UAT2 + LAT3 OFDMA MODE – 26 Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

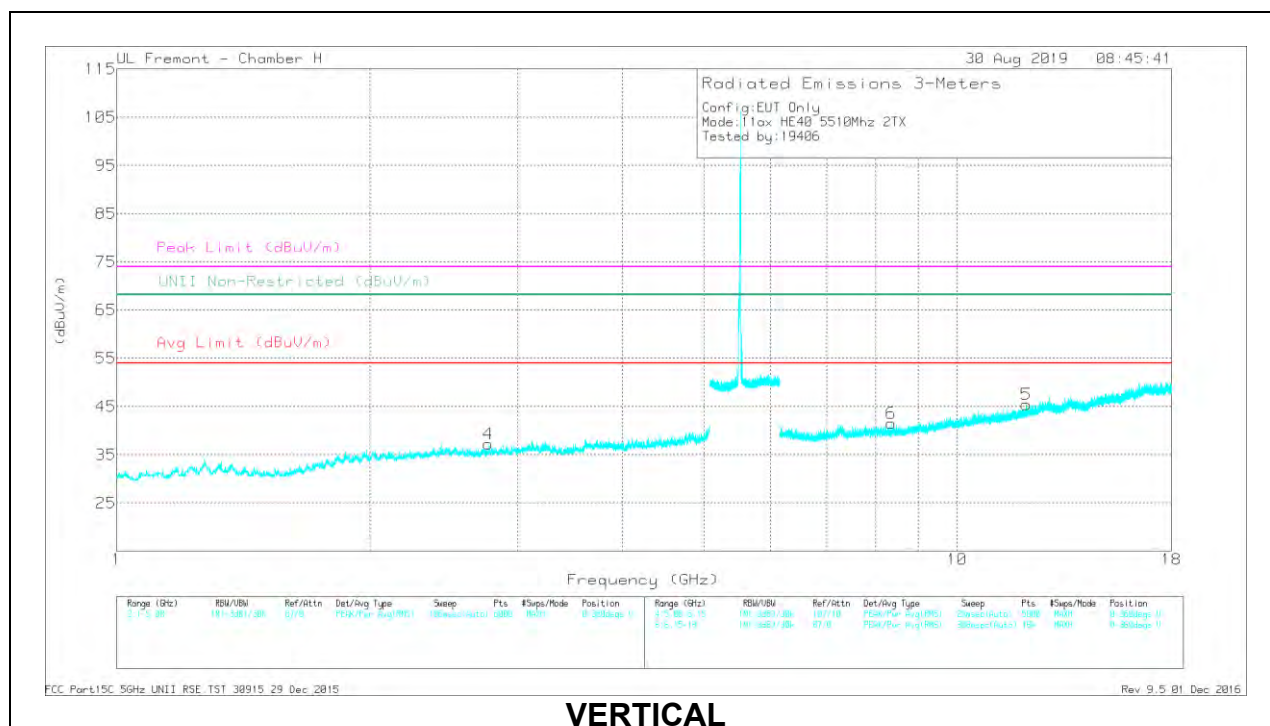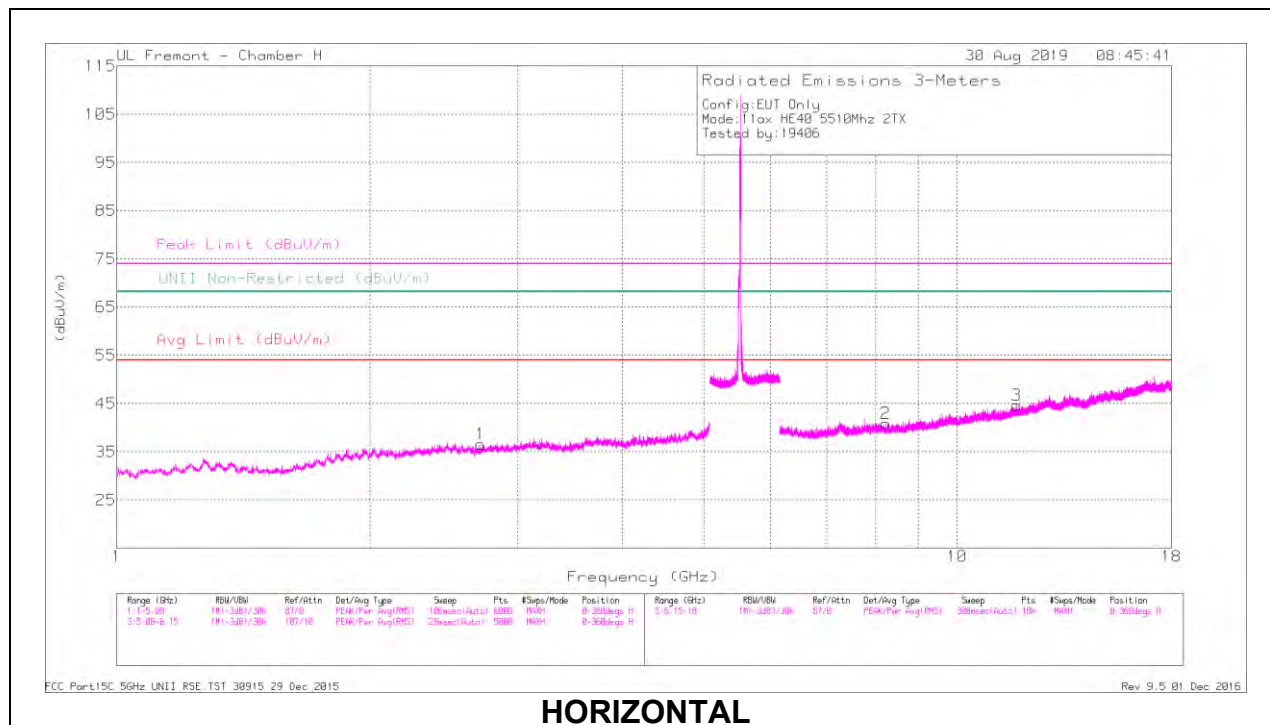

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.712	43.13	PK-U	32.1	-31.6	43.63	-	-	74	-30.37	233	186	H
	* 2.713	30.83	ADR	32.1	-31.6	31.33	54	-22.67	-	-	233	186	H
4	* 2.768	43.78	PK-U	32.2	-31.7	44.28	-	-	74	-29.72	275	400	V
	* 2.769	31.3	ADR	32.2	-31.7	31.8	54	-22.2	-	-	275	400	V
2	* 8.219	39.09	PK-U	36.1	-26.3	48.89	-	-	74	-25.11	57	359	H
	* 8.219	26.17	ADR	36.1	-26.3	35.97	54	-18.03	-	-	57	359	H
3	* 11.784	35.72	PK-U	38.4	-23.3	50.82	-	-	74	-23.18	244	155	H
	* 11.782	24.27	ADR	38.4	-23.3	39.37	54	-14.63	-	-	244	155	H
5	* 12.095	36.17	PK-U	38.8	-23.5	51.47	-	-	74	-22.53	21	246	V
	* 12.092	24.34	ADR	38.8	-23.5	39.64	54	-14.36	-	-	21	246	V
6	* 8.351	37.46	PK-U	36	-26.5	46.96	-	-	74	-27.04	295	140	V
	* 8.354	26.13	ADR	36	-26.4	35.73	54	-18.27	-	-	295	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

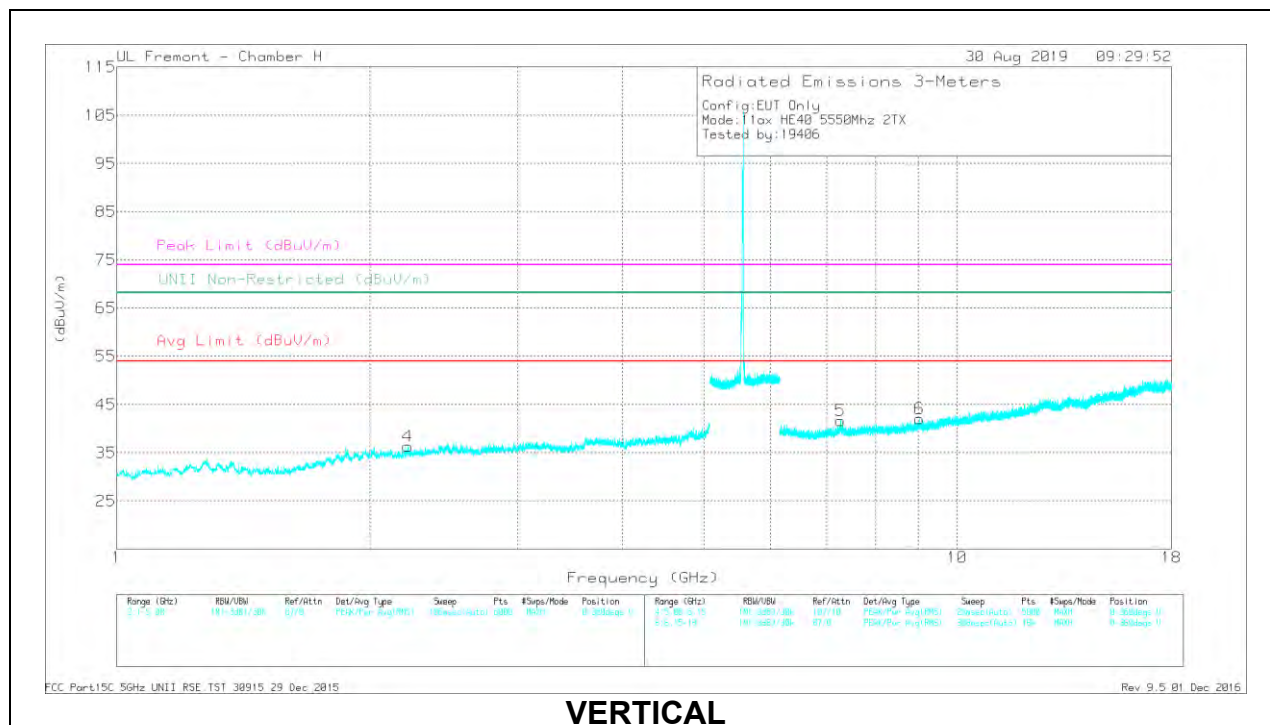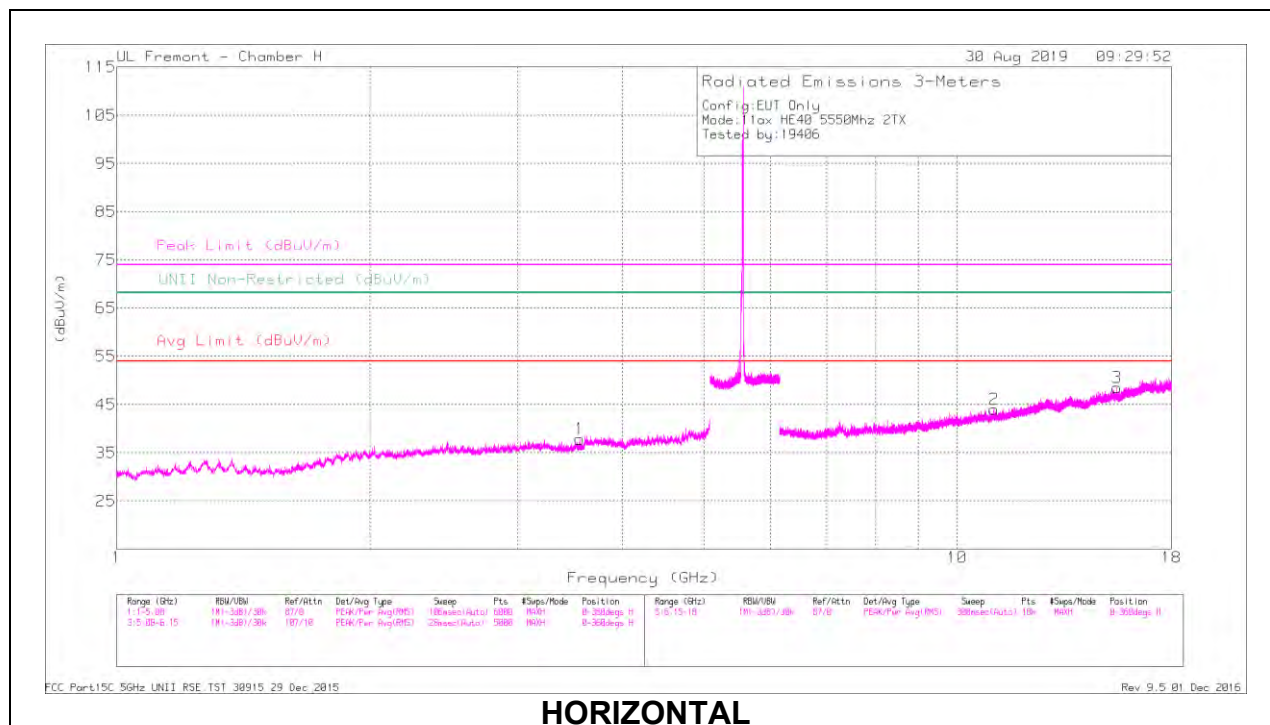

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.558	42.6	PK-U	32.9	-31	44.5	-	-	74	-29.5	340	260	H
	* 3.557	30.46	ADR	32.9	-31	32.36	54	-21.64	-	-	340	260	H
4	* 2.222	42.85	PK-U	31.8	-31.9	42.75	-	-	74	-31.25	357	142	V
	* 2.221	31.09	ADR	31.8	-31.9	30.99	54	-23.01	-	-	357	142	V
2	* 11.061	36.63	PK-U	37.7	-23.4	50.93	-	-	74	-23.07	56	101	H
	* 11.062	24.33	ADR	37.7	-23.4	38.63	54	-15.37	-	-	56	101	H
3	* 15.494	35.8	PK-U	40.9	-22.5	54.2	-	-	74	-19.8	211	209	H
	* 15.495	24.39	ADR	40.9	-22.5	42.79	54	-11.21	-	-	211	209	H
5	* 7.272	38.27	PK-U	36	-26.2	48.07	-	-	74	-25.93	50	371	V
	* 7.273	26.67	ADR	36	-26.2	36.47	54	-17.53	-	-	50	371	V
6	* 9.03	36.78	PK-U	36.2	-24.7	48.28	-	-	74	-25.72	16	283	V
	* 9.031	25.18	ADR	36.2	-24.7	36.68	54	-17.32	-	-	16	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

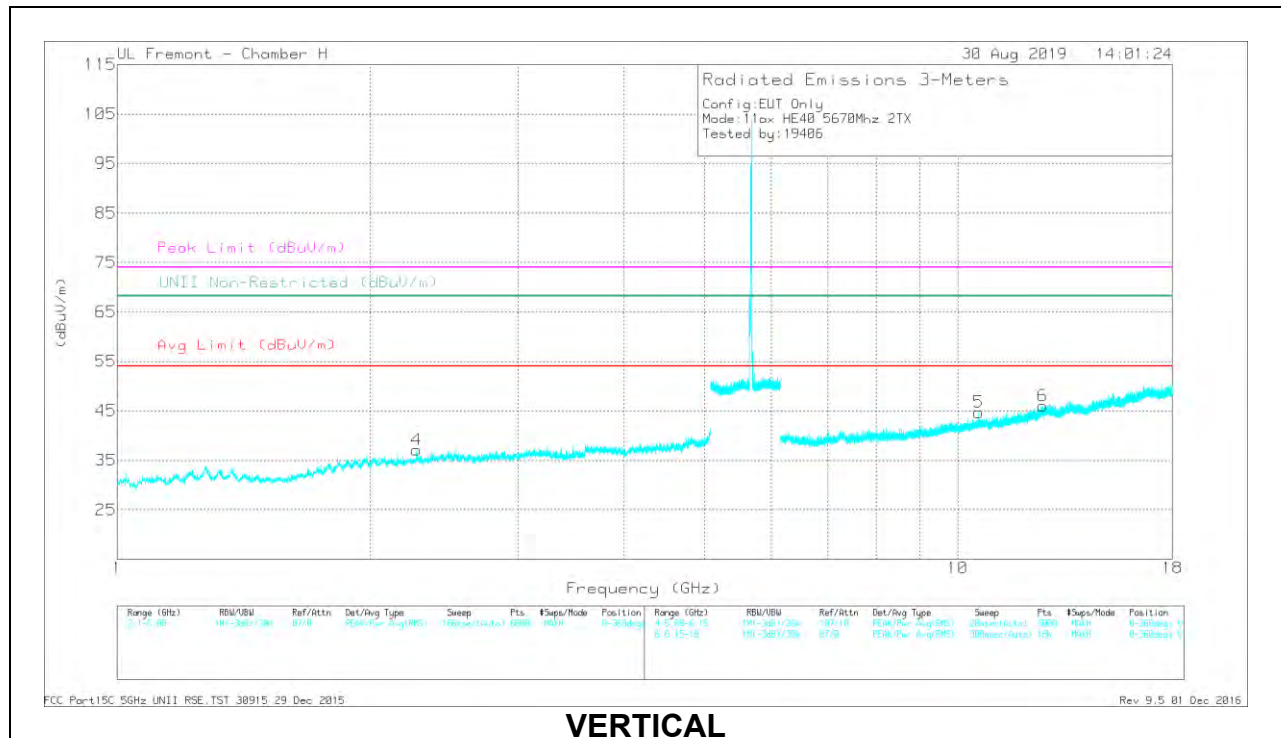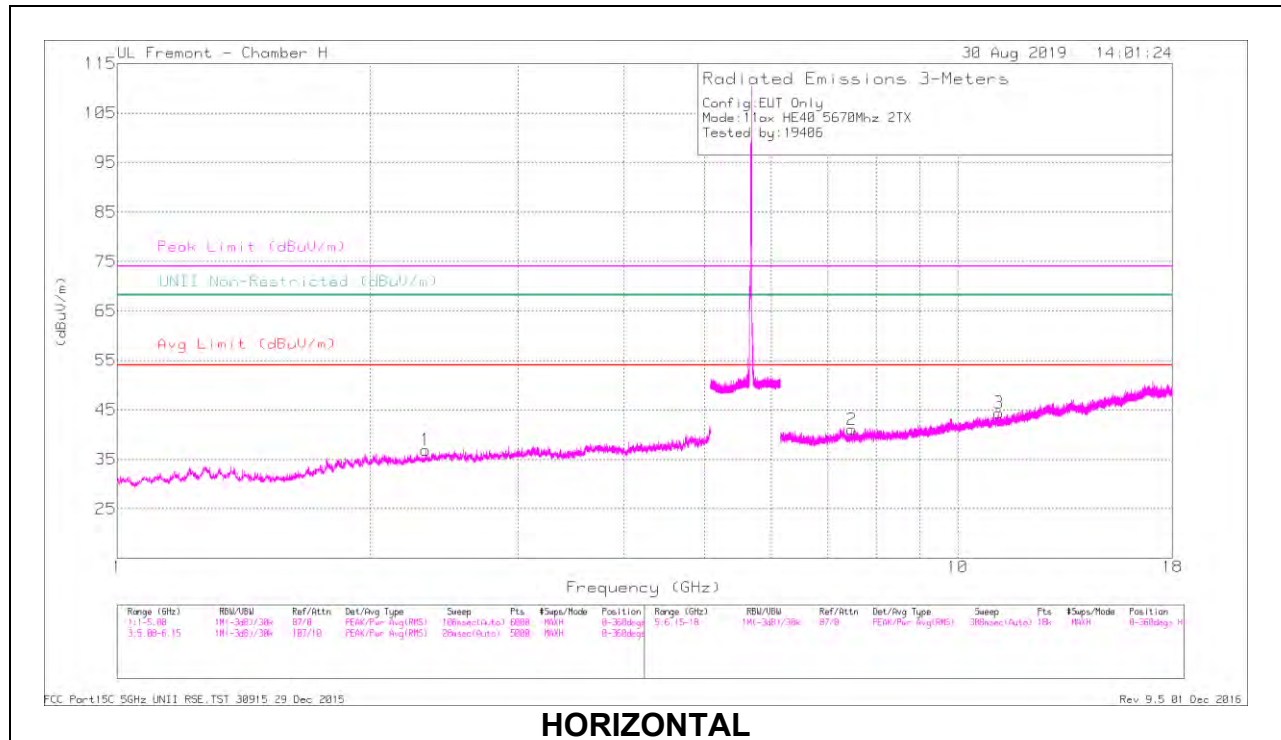

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb I/Ftr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.329	43.65	PK-U	31.8	-31.9	43.55	-	-	74	-30.45	-	-	30	134	H
	* 2.328	31.23	ADR	31.8	-31.9	31.13	54	-22.87	-	-	-	-	30	134	H
4	* 2.269	43.21	PK-U	31.9	-31.9	43.21	-	-	74	-30.79	-	-	134	116	V
	* 2.269	31.31	ADR	31.9	-31.9	31.31	54	-22.69	-	-	-	-	134	116	V
2	* 7.48	38.32	PK-U	36.2	-27.5	47.02	-	-	74	-26.98	-	-	18	328	H
	* 7.48	26.8	ADR	36.2	-27.5	35.5	54	-18.5	-	-	-	-	18	328	H
3	* 11.185	35.82	PK-U	37.8	-23.7	49.92	-	-	74	-24.08	-	-	209	293	H
	* 11.184	24.18	ADR	37.9	-23.7	38.38	54	-15.62	-	-	-	-	209	293	H
6	* 12.626	36.3	PK-U	39.6	-23.1	52.8	-	-	74	-21.2	-	-	210	220	V
	* 12.626	24.13	ADR	39.6	-23.1	40.63	54	-13.37	-	-	-	-	210	220	V
5	10.597	35.96	PK-U	37.6	-23.5	50.06	-	-	-	-	68.2	-18.14	56	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

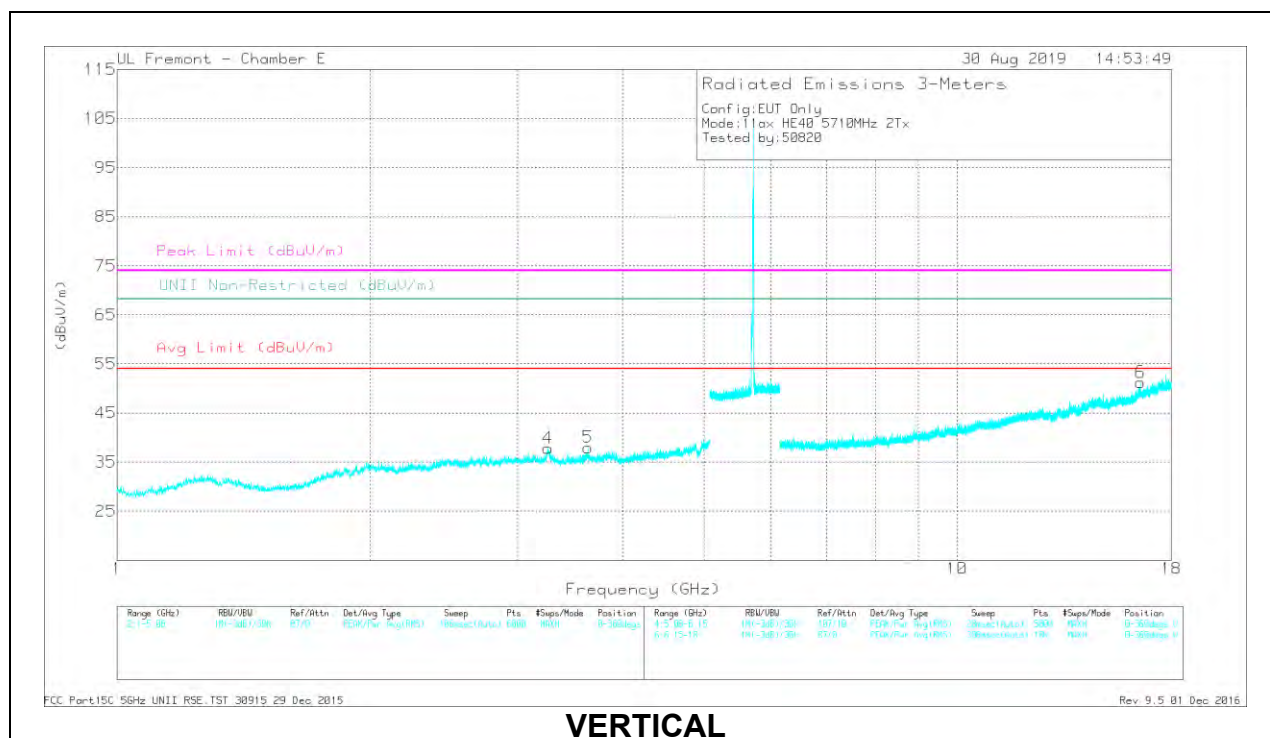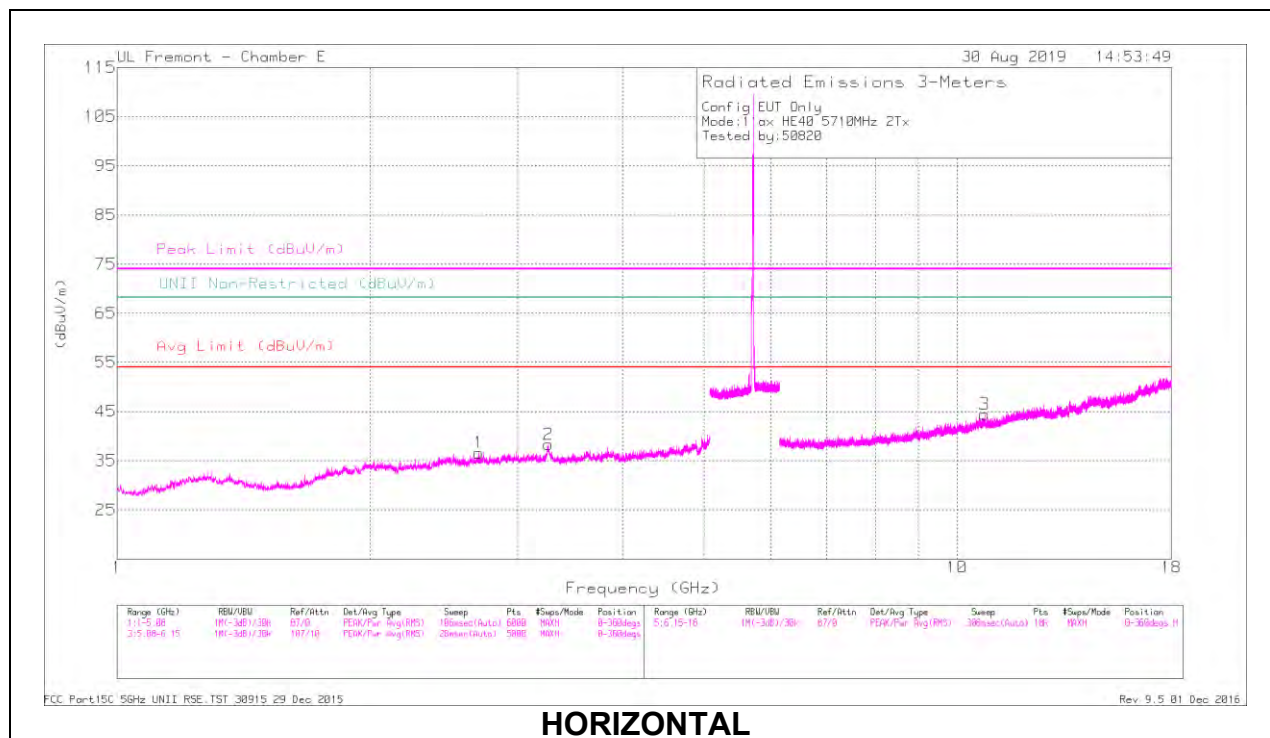

RADIATED EMISSIONS

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.695	45.6	PK-U	32.9	-35.4	43.1	-	-	74	-30.9	-	-	25	230	H
	* 2.695	33.82	ADR	32.9	-35.4	31.32	54	-22.68	-	-	-	-	25	230	H
2	* 3.265	44.75	PK-U	35.1	-34.5	45.35	-	-	74	-28.65	-	-	79	244	H
	* 3.263	32.69	ADR	35.1	-34.5	33.29	54	-20.71	-	-	-	-	79	244	H
4	* 3.261	44.67	PK-U	35.1	-34.5	45.27	-	-	74	-28.73	-	-	100	116	V
	* 3.26	32.77	ADR	35.1	-34.5	33.37	54	-20.63	-	-	-	-	100	116	V
5	* 3.635	43.77	PK-U	33.5	-33.7	43.57	-	-	74	-30.43	-	-	360	240	V
	* 3.637	32.06	ADR	33.4	-33.7	31.76	54	-22.24	-	-	-	-	360	240	V
3	* 10.784	37.52	PK-U	37.9	-24.9	50.52	-	-	74	-23.48	-	-	64	280	H
	* 10.787	25.56	ADR	37.9	-24.8	38.66	54	-15.34	-	-	-	-	64	280	H
6	16.533	35.14	PK-U	41.1	-19.1	57.14	-	-	-	-	68.2	-11.06	210	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX UAT2 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

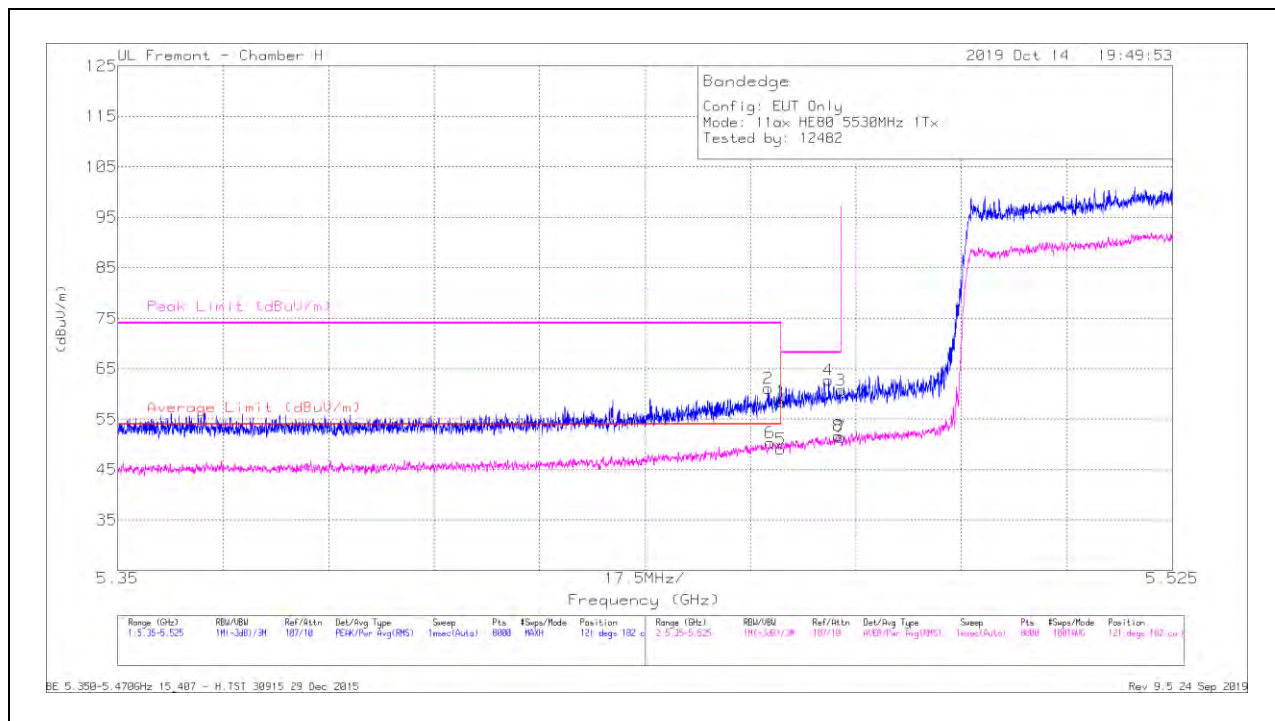


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.74	Pk	35.2	-20.4	58.54	-	-	74	-15.46	121	182	H
2	* 5.4579	46.2	Pk	35.3	-20.4	61.1	-	-	74	-12.9	121	182	H
5	* 5.45998	34.24	RMS	35.2	-20.4	49.04	54	-4.96	-	-	121	182	H
6	* 5.45823	35.42	RMS	35.3	-20.4	50.32	54	-3.68	-	-	121	182	H
4	5.46794	47.94	Pk	35.3	-20.5	62.74	-	-	68.2	-5.46	121	182	H
8	5.46961	36.83	RMS	35.3	-20.5	51.63	-	-	-	-	121	182	H
3	5.46998	45.89	Pk	35.3	-20.5	60.69	-	-	68.2	-7.51	121	182	H
7	5.46998	36.61	RMS	35.3	-20.5	51.41	-	-	-	-	121	182	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

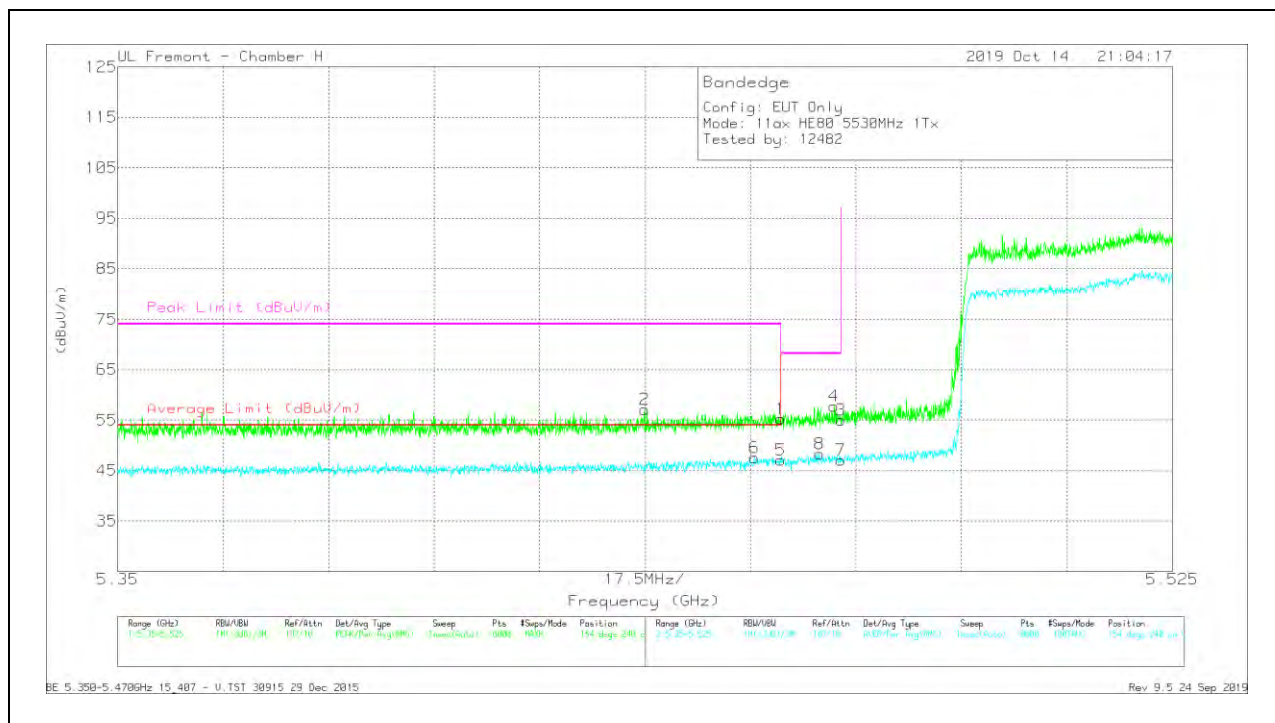

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.51	Pk	35.2	-20.4	55.31	-	-	74	-18.69	154	240	V
2	* 5.4374	42.47	Pk	35.1	-20.4	57.17	-	-	74	-16.83	154	240	V
5	* 5.45998	32.31	RMS	35.2	-20.4	47.11	54	-6.89	-	-	154	240	V
6	* 5.45563	32.65	RMS	35.3	-20.4	47.55	54	-6.45	-	-	154	240	V
8	5.46643	33.64	RMS	35.2	-20.5	48.34	-	-	-	-	154	240	V
4	5.46889	42.9	Pk	35.3	-20.5	57.7	-	-	68.2	-10.5	154	240	V
3	5.46998	40.26	Pk	35.3	-20.5	55.06	-	-	68.2	-13.14	154	240	V
7	5.46998	32.24	RMS	35.3	-20.5	47.04	-	-	-	-	154	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX UAT2 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

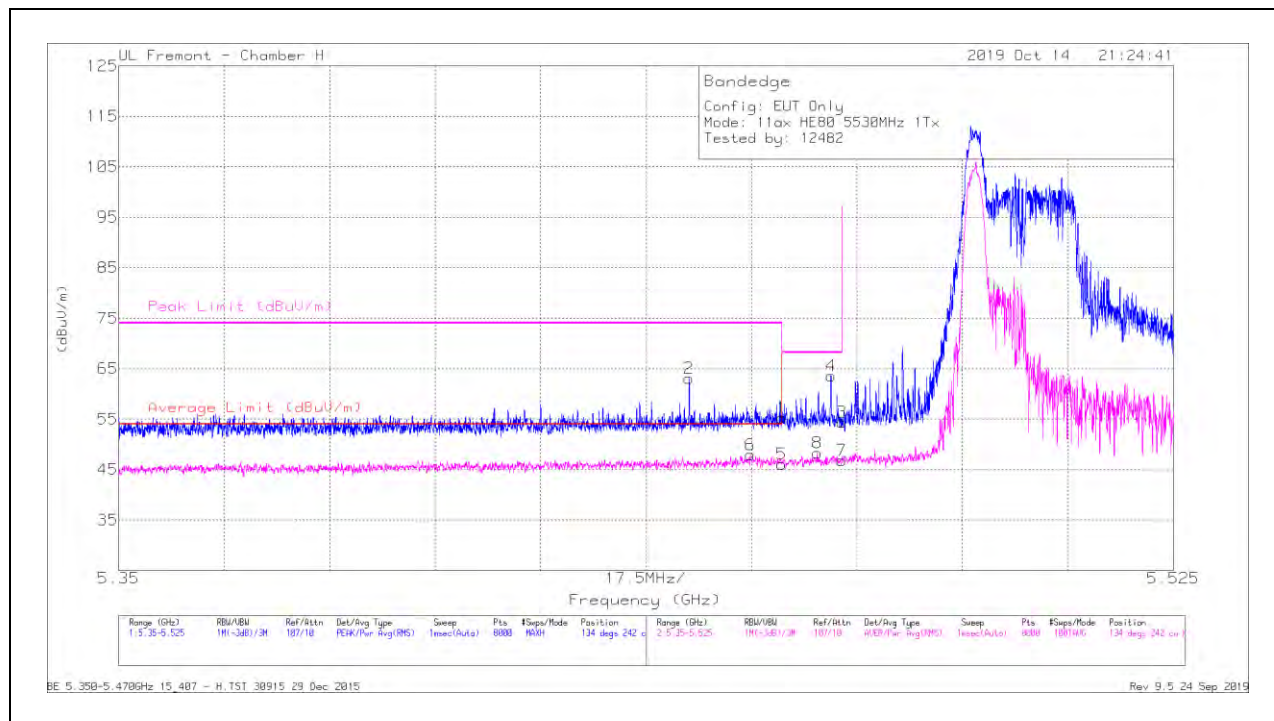

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.42	Pk	35.2	-20.4	55.22	-	-	74	-18.78	134	242	H
2	* 5.44464	48.41	Pk	35.1	-20.4	63.11	-	-	74	-10.89	134	242	H
5	* 5.45998	31.28	RMS	35.2	-20.4	46.08	54	-7.92	-	-	134	242	H
6	* 5.4548	32.99	RMS	35.3	-20.4	47.89	54	-6.11	-	-	134	242	H
8	5.46591	33.66	RMS	35.2	-20.5	48.36	-	-	-	-	134	242	H
4	5.46819	48.79	Pk	35.3	-20.5	63.59	-	-	68.2	-4.61	134	242	H
3	5.46998	39.6	Pk	35.3	-20.5	54.4	-	-	68.2	-13.8	134	242	H
7	5.46998	32.07	RMS	35.3	-20.5	46.87	-	-	-	-	134	242	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

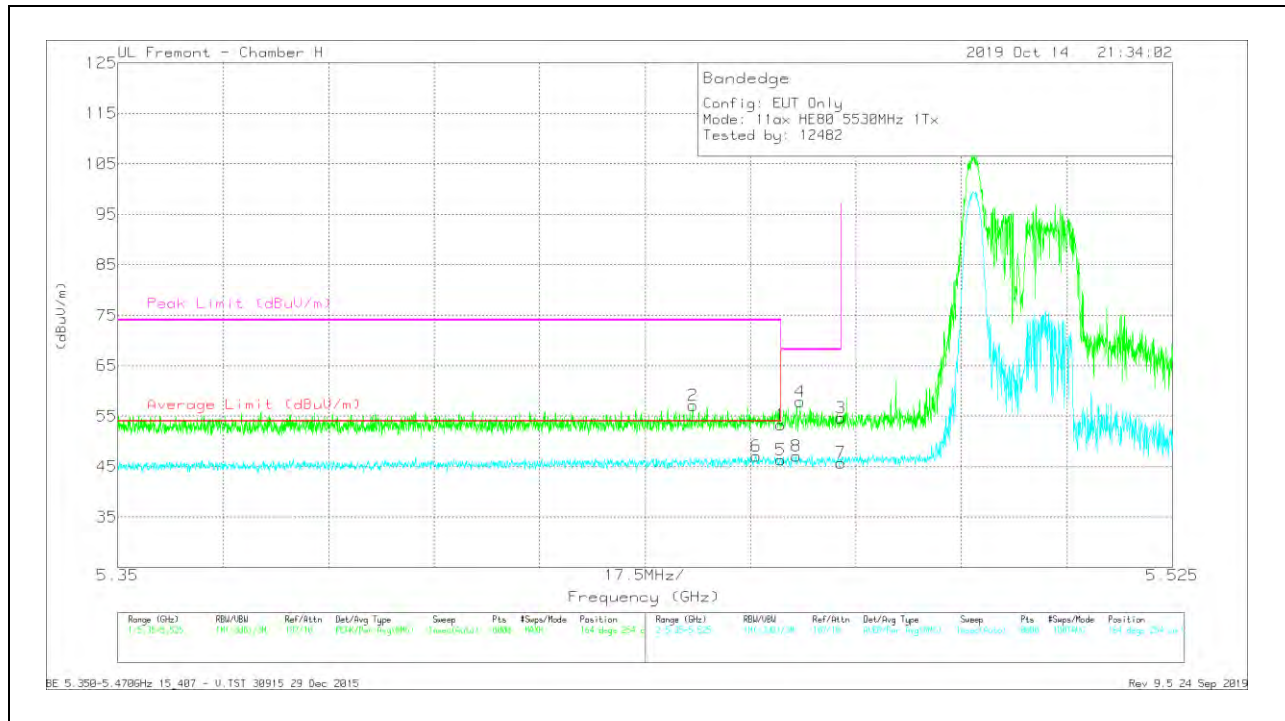

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX LAT3 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

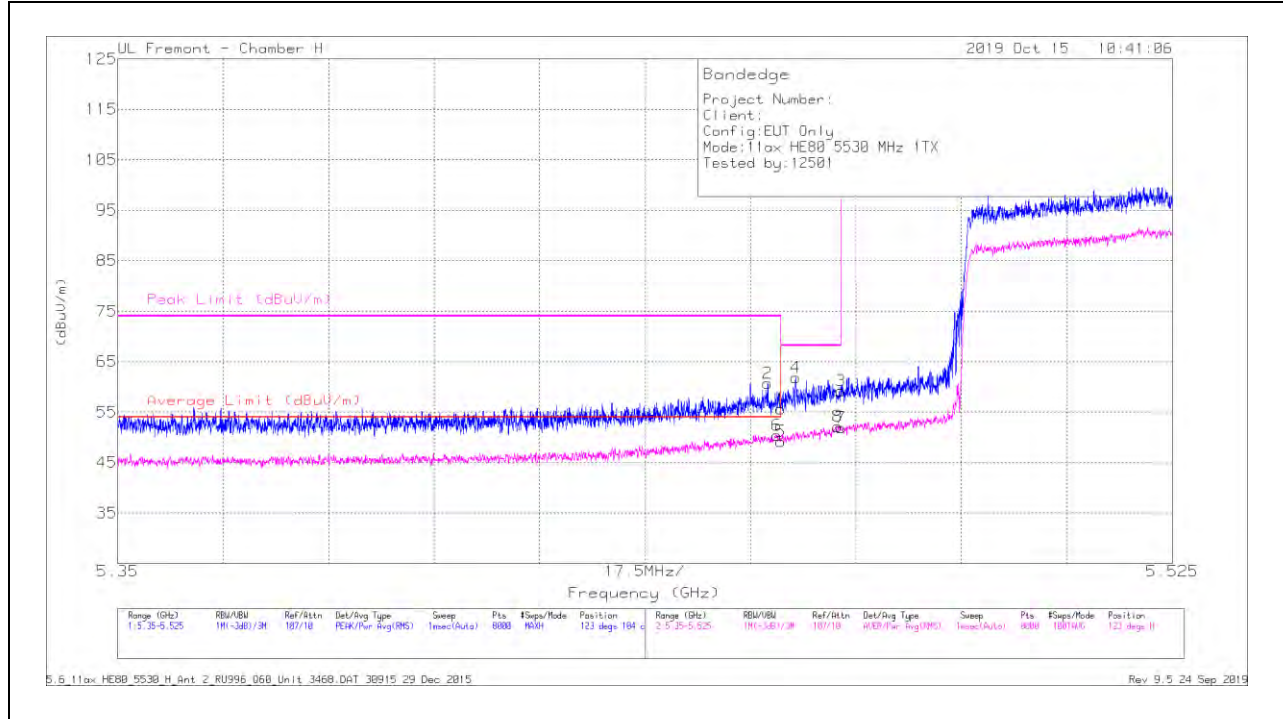


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.81	Pk	35.2	-20.4	55.61	-	-	74	-18.39	123	104	H
2	* 5.45786	45.86	Pk	35.3	-20.4	60.76	-	-	74	-13.24	123	104	H
5	* 5.45998	34.41	RMS	35.2	-20.4	49.21	54	-4.79	-	-	123	104	H
6	* 5.45939	35.67	RMS	35.2	-20.4	50.47	54	-3.53	-	-	123	104	H
4	5.46247	47.13	Pk	35.2	-20.5	61.83	-	-	68.2	-6.37	123	104	H
8	5.4695	37.34	RMS	35.3	-20.5	52.14	-	-	-	-	123	104	H
3	5.46998	44.41	Pk	35.3	-20.5	59.21	-	-	68.2	-8.99	123	104	H
7	5.46998	37.09	RMS	35.3	-20.5	51.89	-	-	-	-	123	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

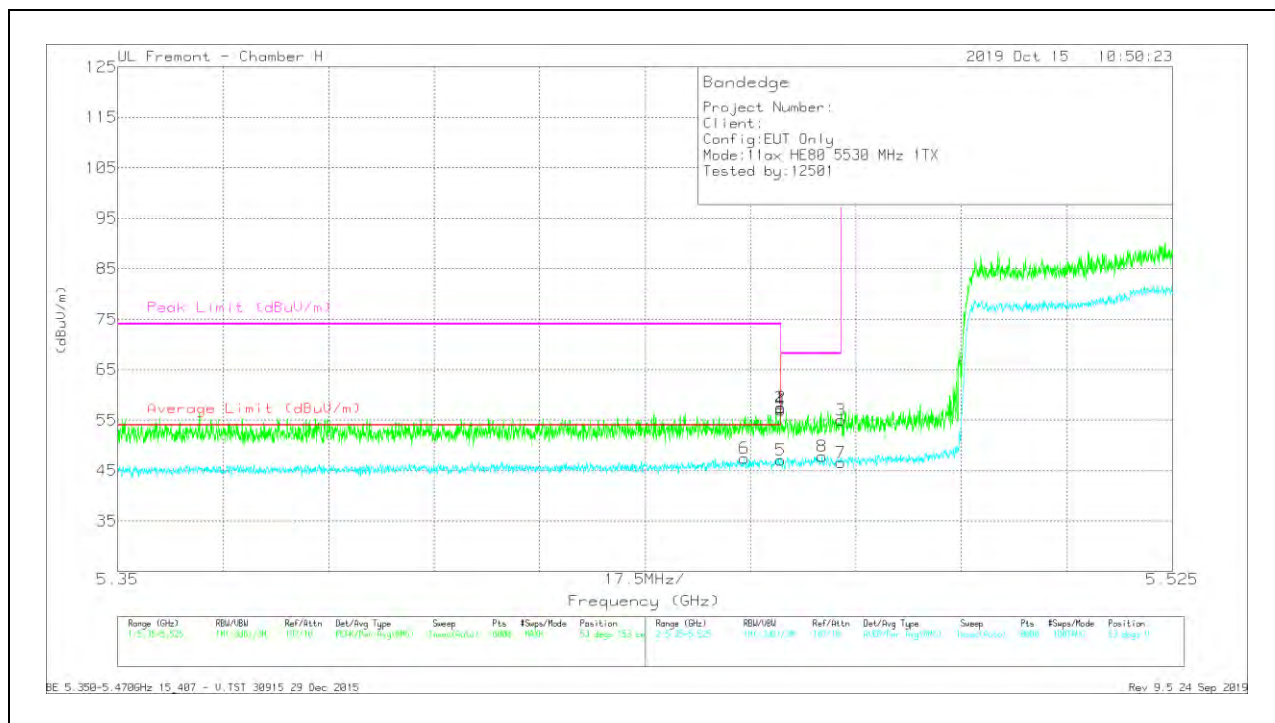

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX LAT3 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

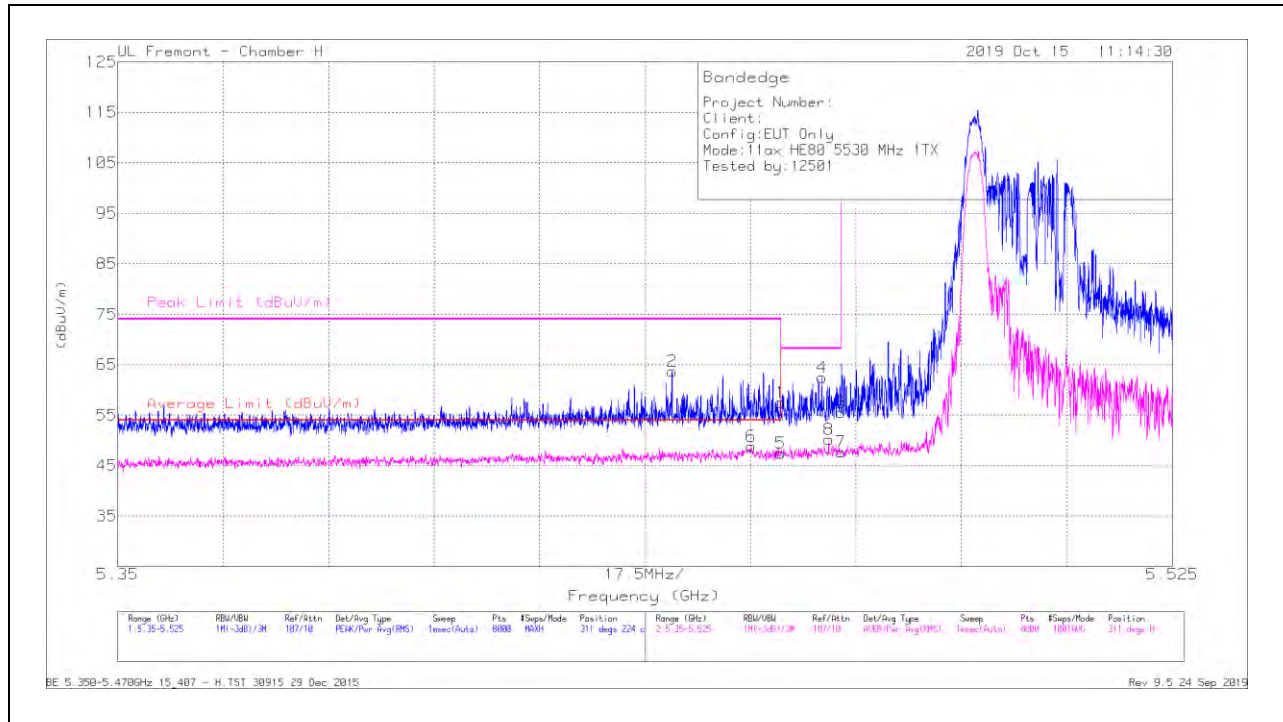


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.74	Pk	35.2	-20.4	57.54	-	-	74	-16.46	311	224	H
2	* 5.44198	48.99	Pk	35.1	-20.4	63.69	-	-	74	-10.31	311	224	H
5	* 5.45998	32.63	RMS	35.2	-20.4	47.43	54	-6.57	-	-	311	224	H
6	* 5.45512	33.85	RMS	35.3	-20.4	48.75	54	-5.25	-	-	311	224	H
4	5.46685	47.69	Pk	35.3	-20.5	62.49	-	-	68.2	-5.71	311	224	H
8	5.46799	35.33	RMS	35.3	-20.5	50.13	-	-	-	-	311	224	H
3	5.46998	40.73	Pk	35.3	-20.5	55.53	-	-	68.2	-12.67	311	224	H
7	5.46998	32.87	RMS	35.3	-20.5	47.67	-	-	-	-	311	224	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

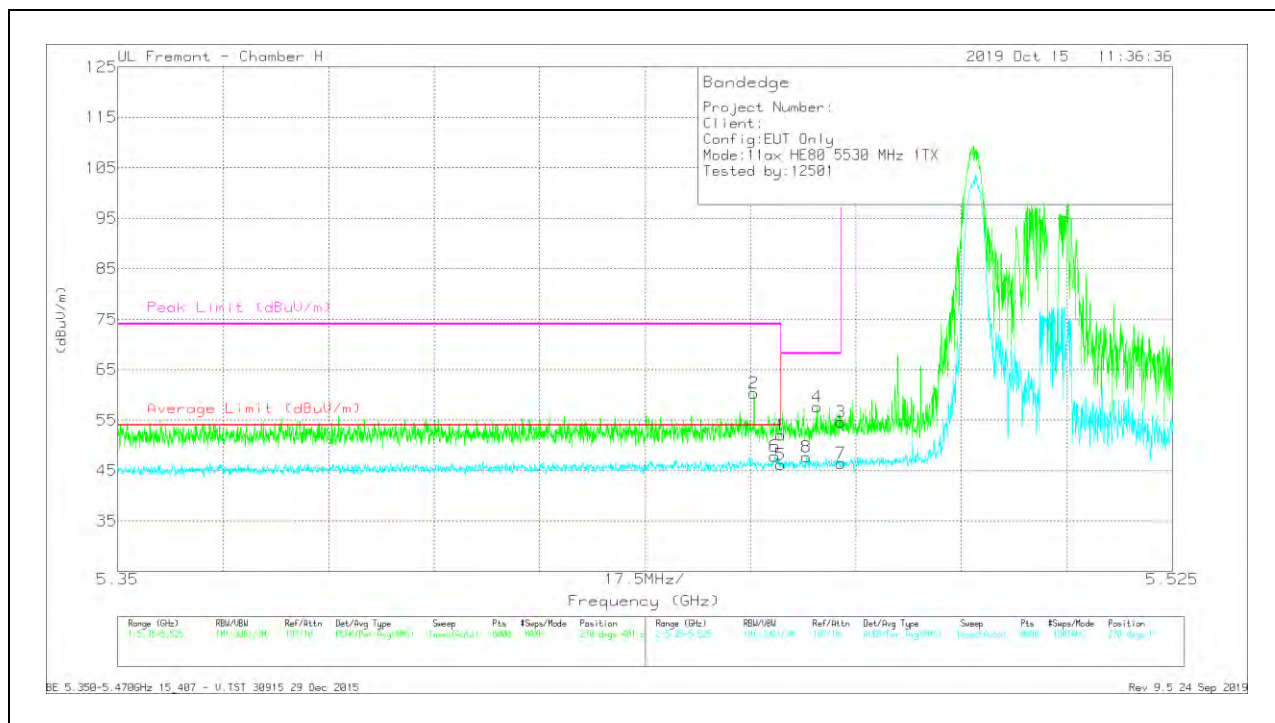

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	37.27	Pk	35.2	-20.4	52.07	-	-	74	-21.93	270	401	V
2	* 5.45556	45.48	Pk	35.3	-20.4	60.38	-	-	74	-13.62	270	401	V
5	* 5.45998	31.39	RMS	35.2	-20.4	46.19	54	-7.81	-	-	270	401	V
6	* 5.45902	32.97	RMS	35.3	-20.4	47.87	54	-6.13	-	-	270	401	V
8	5.46429	33	RMS	35.2	-20.5	47.7	-	-	-	-	270	401	V
4	5.46608	42.9	Pk	35.2	-20.5	57.6	-	-	68.2	-10.6	270	401	V
3	5.46998	39.88	Pk	35.3	-20.5	54.68	-	-	68.2	-13.52	270	401	V
7	5.46998	31.6	RMS	35.3	-20.5	46.4	-	-	-	-	270	401	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX UAT2 + LAT3 OFDMA MODE – 966 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

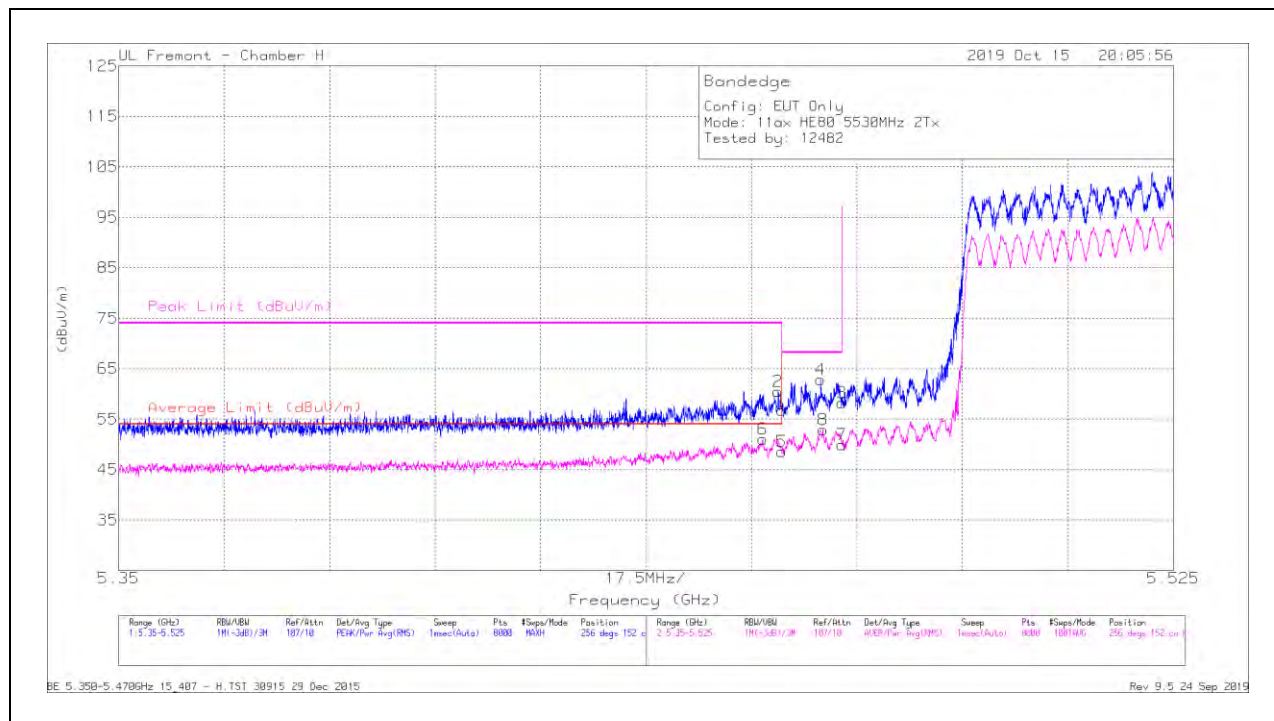


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.93	Pk	35.2	-20.4	56.73	-	-	74	-17.27	256	152	H
2	* 5.45941	45.67	Pk	35.2	-20.4	60.47	-	-	74	-13.53	256	152	H
5	* 5.45998	33.7	RMS	35.2	-20.4	48.5	54	-5.5	-	-	256	152	H
6	* 5.45687	36.1	RMS	35.3	-20.4	51	54	-3	-	-	256	152	H
4	5.46648	48.18	Pk	35.2	-20.5	62.88	-	-	68.2	-5.32	256	152	H
8	5.46683	38.1	RMS	35.3	-20.5	52.9	-	-	-	-	256	152	H
3	5.46998	43.43	Pk	35.3	-20.5	58.23	-	-	68.2	-9.97	256	152	H
7	5.46998	35.15	RMS	35.3	-20.5	49.95	-	-	-	-	256	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

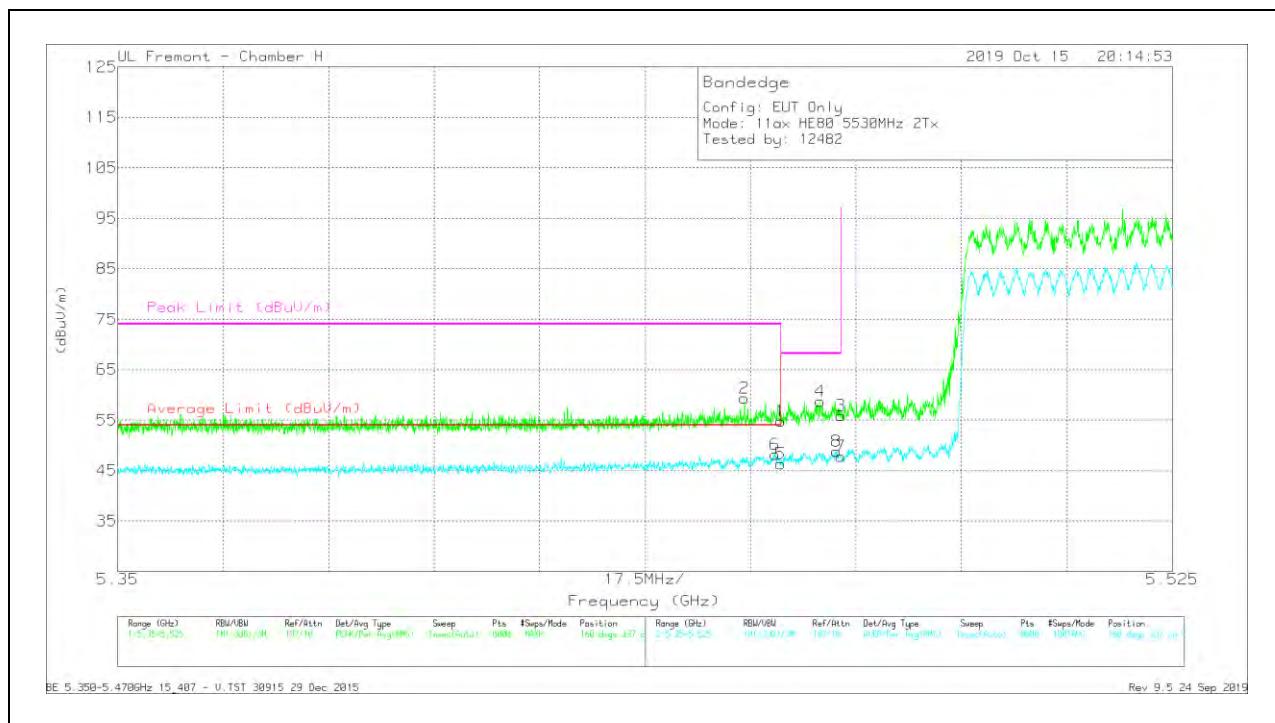

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.97	Pk	35.2	-20.4	54.77	-	-	74	-19.23	160	337	V
2	* 5.45399	44.52	Pk	35.2	-20.4	59.32	-	-	74	-14.68	160	337	V
5	* 5.45998	31.51	RMS	35.2	-20.4	46.31	54	-7.69	-	-	160	337	V
6	* 5.45906	33.3	RMS	35.3	-20.4	48.2	54	-5.8	-	-	160	337	V
4	5.46654	44	Pk	35.2	-20.5	58.7	-	-	68.2	-9.5	160	337	V
8	5.4693	33.97	RMS	35.3	-20.5	48.77	-	-	-	-	160	337	V
3	5.46998	41.05	Pk	35.3	-20.5	55.85	-	-	68.2	-12.35	160	337	V
7	5.46998	32.98	RMS	35.3	-20.5	47.78	-	-	-	-	160	337	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

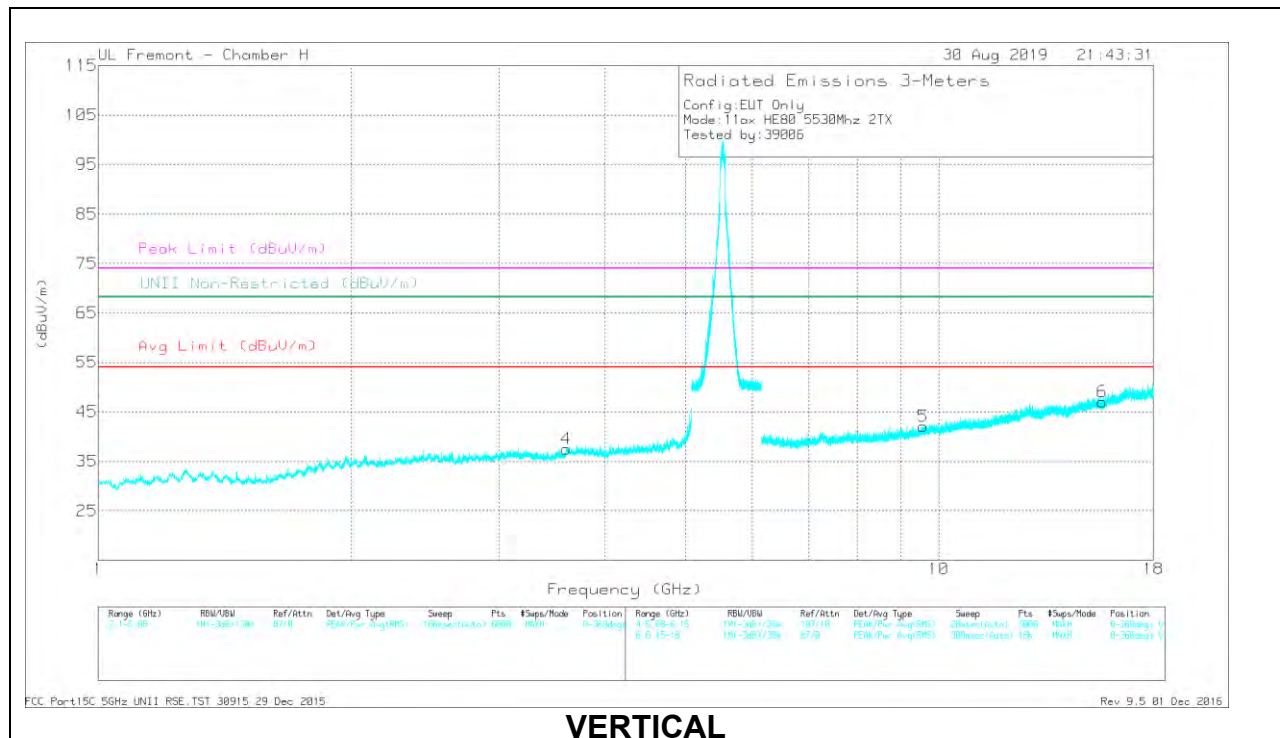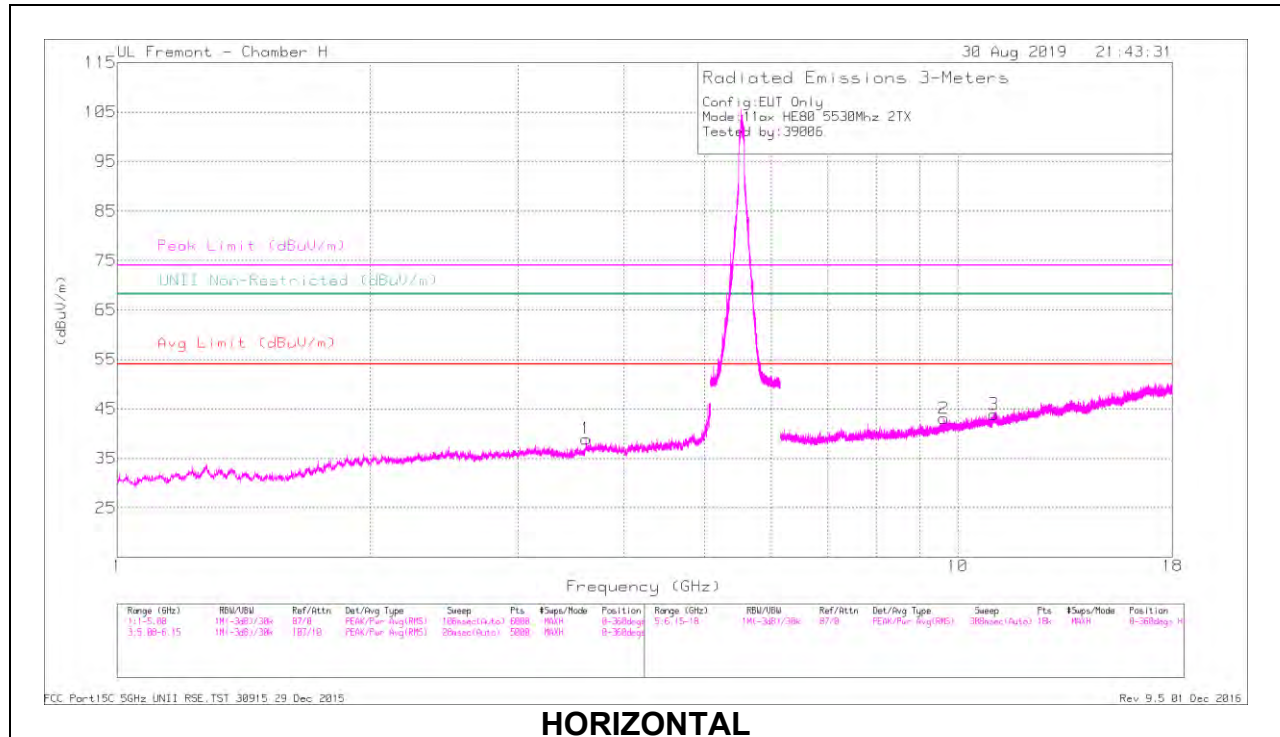

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Correcte d Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.612	42.55	PK-U	33.1	-31	44.65	-	-	74	-29.35	-	-	151	136	H
	* 3.613	30.82	ADR	33.1	-31	32.92	54	-21.08	-	-	-	-	151	136	H
4	* 3.602	42.1	PK-U	33	-31.1	44	-	-	74	-30	-	-	180	161	V
	* 3.604	30.68	ADR	33	-31.1	32.58	54	-21.42	-	-	-	-	180	161	V
3	* 11.041	36.62	PK-U	37.7	-23.3	51.02	-	-	74	-22.98	-	-	99	191	H
	* 11.043	25.56	ADR	37.7	-23.4	39.86	54	-14.14	-	-	-	-	99	191	H
6	* 15.66	36.93	PK-U	40.8	-22.7	55.03	-	-	74	-18.97	-	-	260	130	V
	* 15.658	25.08	ADR	40.8	-22.8	43.08	54	-10.92	-	-	-	-	260	130	V
5	9.578	36.08	PK-U	36.8	-24.3	48.58	-	-	-	-	68.2	-19.62	200	231	V
2	9.626	36.33	PK-U	36.9	-24.6	48.63	-	-	-	-	68.2	-19.57	190	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

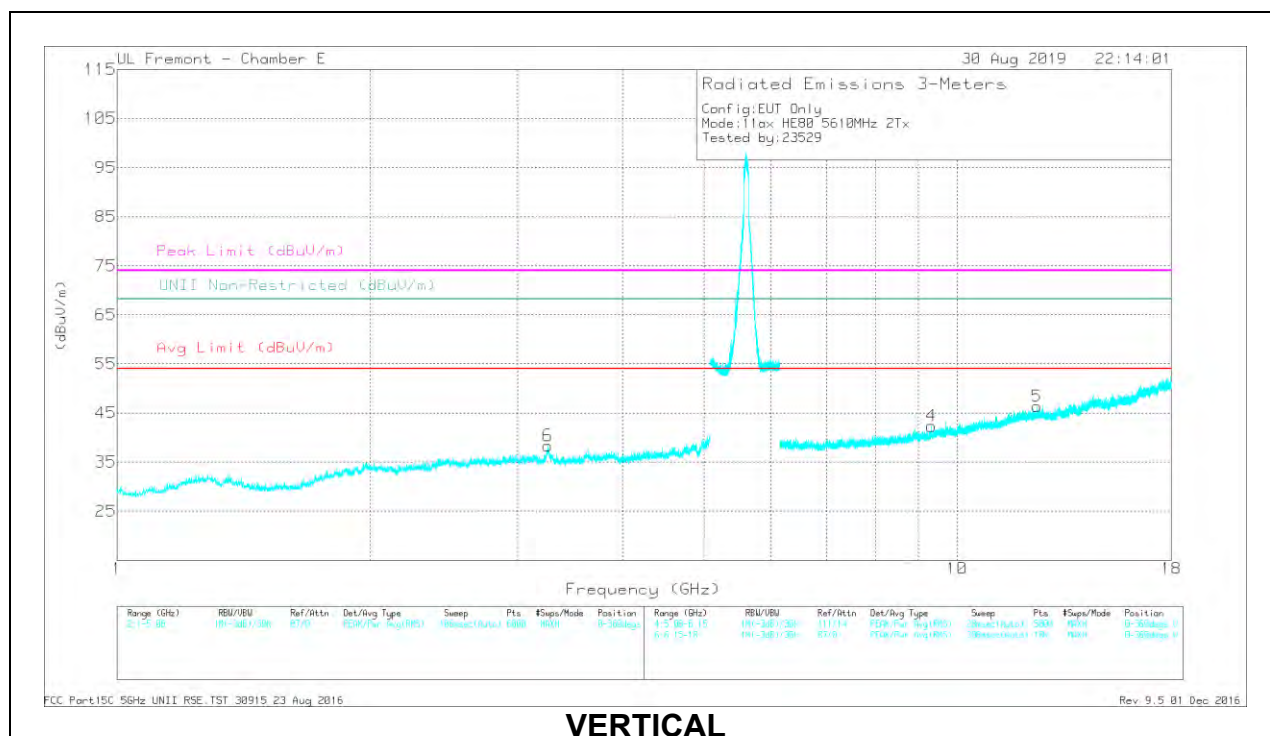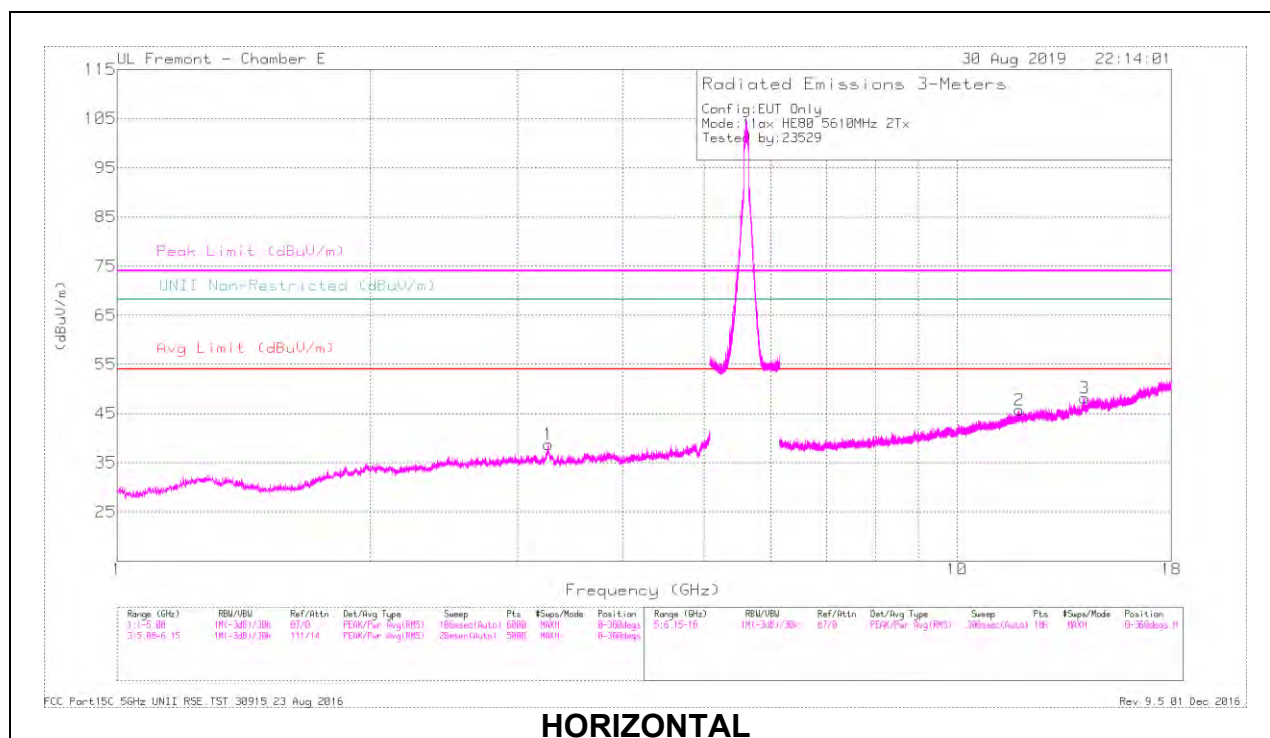

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Correcte d Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.264	44.77	PK-U	35.1	-34.5	45.37	-	-	74	-28.63	-	-	348	166	H
	* 3.262	33.33	ADR	35.1	-34.5	33.93	54	-20.07	-	-	-	-	348	166	H
2	* 11.873	35.41	PK-U	38.9	-22.9	51.41	-	-	74	-22.59	-	-	245	153	H
	* 11.872	24.64	ADR	38.9	-22.9	40.64	54	-13.36	-	-	-	-	245	153	H
5	* 12.458	35.31	PK-U	39	-22.5	51.81	-	-	74	-22.19	-	-	112	179	V
	* 12.457	24.69	ADR	39	-22.4	41.29	54	-12.71	-	-	-	-	112	179	V
4	* 9.319	37.49	PK-U	36.4	-25.5	48.39	-	-	74	-25.61	-	-	192	207	V
	* 9.321	26.19	ADR	36.4	-25.5	37.09	54	-16.91	-	-	-	-	192	207	V
6	3.257	44.95	PK-U	34.9	-34.6	45.25	-	-	-	-	68.2	-22.95	128	175	V
3	14.197	36.06	PK-U	39	-20.8	54.26	-	-	-	-	68.2	-13.94	240	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

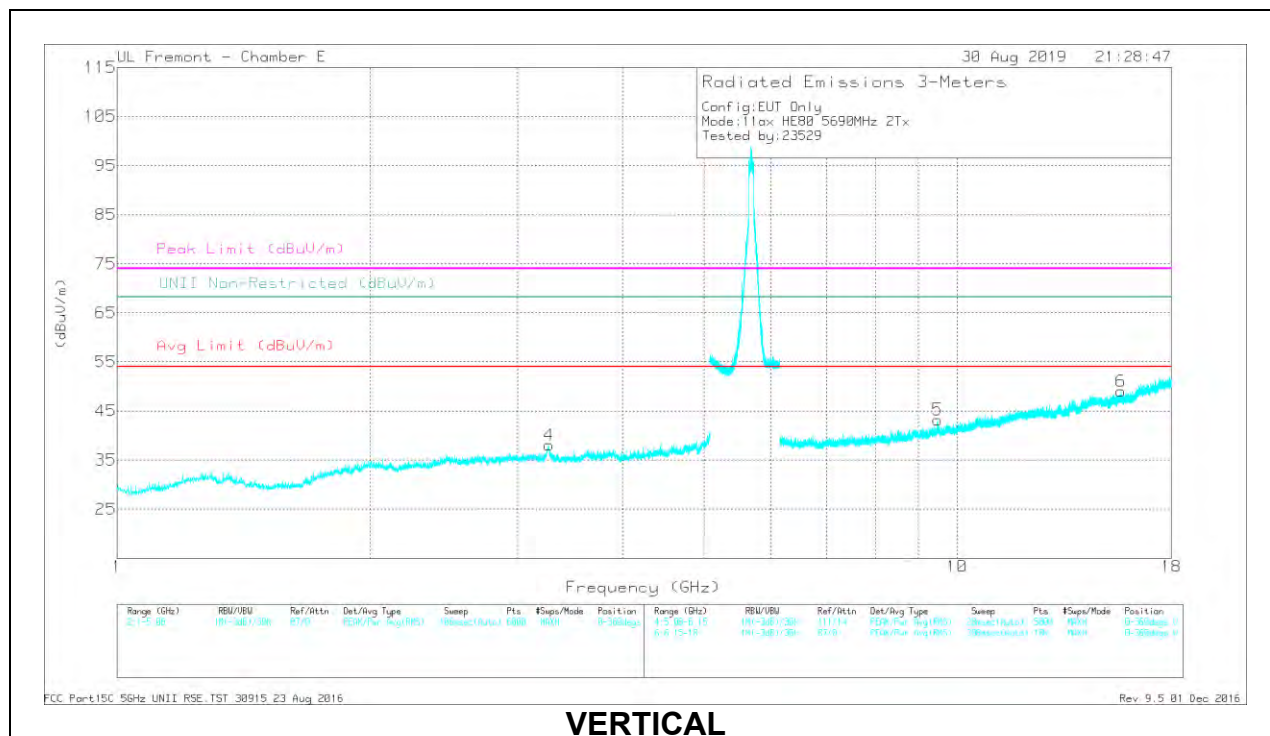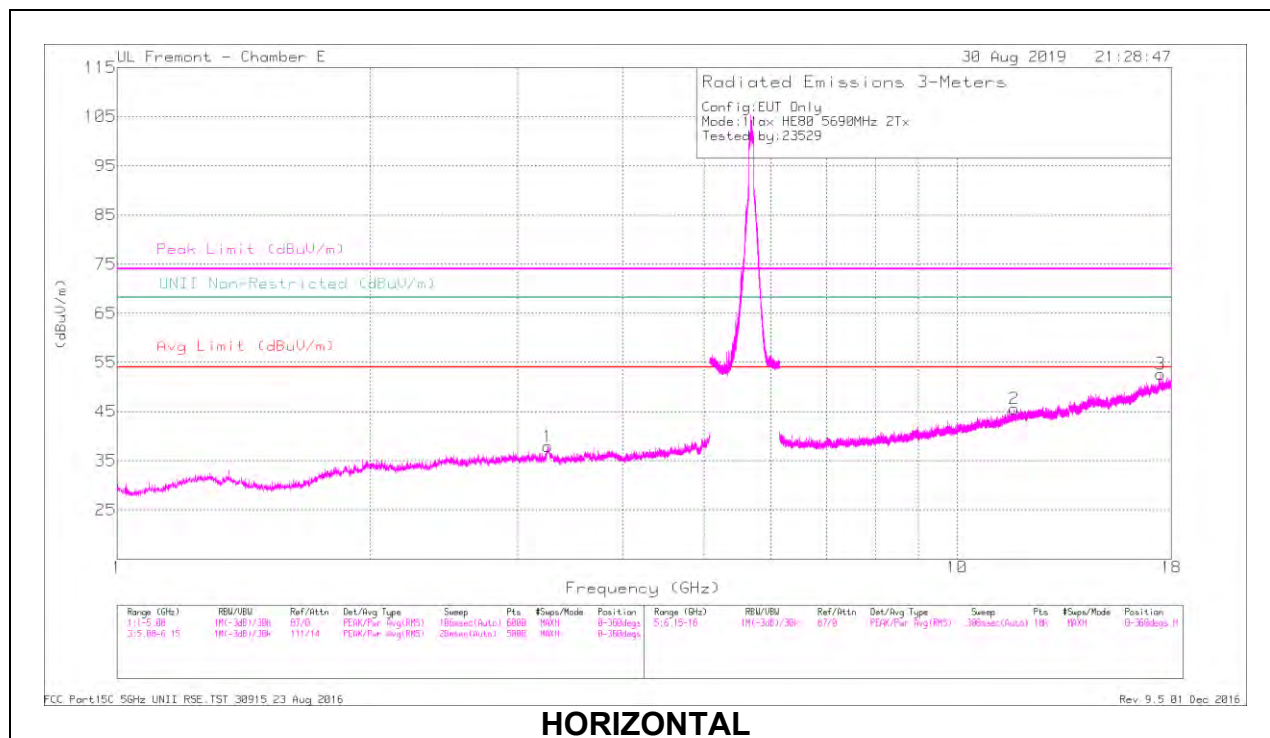

RADIATED EMISSIONS

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Correcte d Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 11.706	36.3	PK-U	38.8	-23.1	52	-	-	74	-22	-	-	164	207	H
	* 11.708	24.62	ADR	38.8	-23.1	40.32	54	-13.68	-	-	-	-	164	207	H
5	* 9.489	37.26	PK-U	36.6	-24.6	49.26	-	-	74	-24.74	-	-	324	177	V
	* 9.486	25.89	ADR	36.7	-24.6	37.99	54	-16.01	-	-	-	-	324	177	V
6	* 15.675	35.55	PK-U	40.2	-20.8	54.95	-	-	74	-19.05	-	-	312	159	V
	* 15.673	24.71	ADR	40.2	-20.8	44.11	54	-9.89	-	-	-	-	312	159	V
1	3.257	45.29	PK-U	34.9	-34.6	45.59	-	-	-	-	68.2	-22.61	245	193	H
4	3.272	44.17	PK-U	34.7	-34.6	44.27	-	-	-	-	68.2	-23.93	77	153	V
3	17.463	35.69	PK-U	41.5	-19.2	57.99	-	-	-	-	68.2	-10.21	184	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX UAT2 + LAT3 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

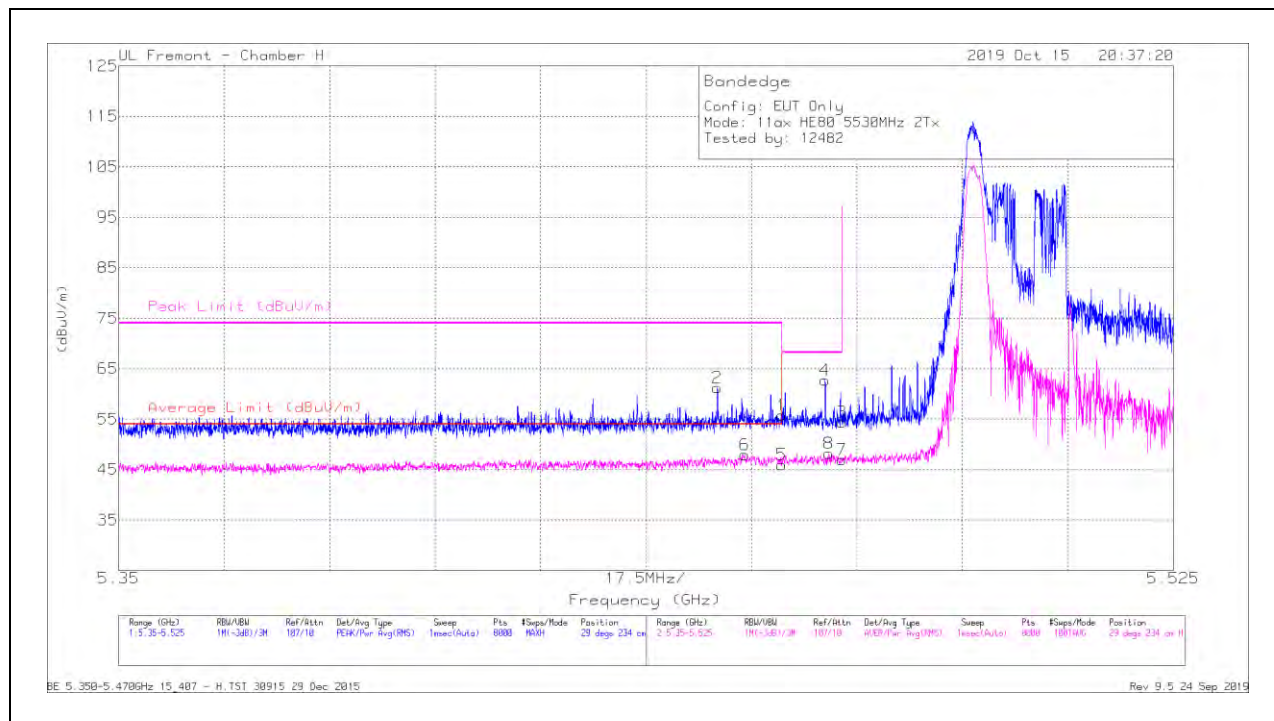

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.01	Pk	35.2	-20.4	55.81	-	-	74	-18.19	29	234	H
2	* 5.44933	46.52	Pk	35.1	-20.4	61.22	-	-	74	-12.78	29	234	H
5	* 5.45998	31.11	RMS	35.2	-20.4	45.91	54	-8.09	-	-	29	234	H
6	* 5.45385	33.16	RMS	35.2	-20.4	47.96	54	-6.04	-	-	29	234	H
4	5.46722	47.96	Pk	35.3	-20.5	62.76	-	-	68.2	-5.44	29	234	H
8	5.46781	33.42	RMS	35.3	-20.5	48.22	-	-	-	-	29	234	H
3	5.46998	39.63	Pk	35.3	-20.5	54.43	-	-	68.2	-13.77	29	234	H
7	5.46998	32.14	RMS	35.3	-20.5	46.94	-	-	-	-	29	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

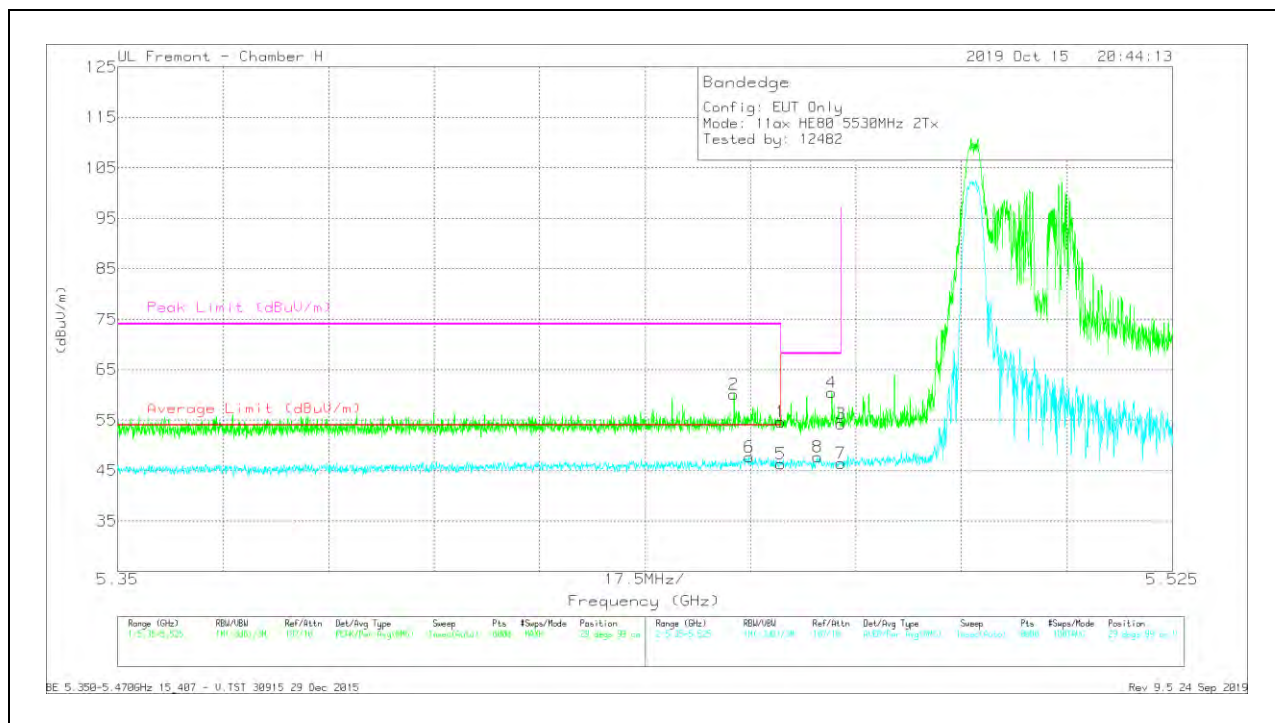

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.8	Pk	35.2	-20.4	54.6	-	-	74	-19.4	29	99	V
2	* 5.45224	45.33	Pk	35.2	-20.4	60.13	-	-	74	-13.87	29	99	V
5	* 5.45998	31.54	RMS	35.2	-20.4	46.34	54	-7.66	-	-	29	99	V
6	* 5.45477	32.77	RMS	35.3	-20.4	47.67	54	-6.33	-	-	29	99	V
8	5.46613	32.95	RMS	35.2	-20.5	47.65	-	-	-	-	29	99	V
4	5.46847	45.64	Pk	35.3	-20.5	60.44	-	-	68.2	-7.76	29	99	V
3	5.46998	39.43	Pk	35.3	-20.5	54.23	-	-	68.2	-13.97	29	99	V
7	5.46998	31.63	RMS	35.3	-20.5	46.43	-	-	-	-	29	99	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

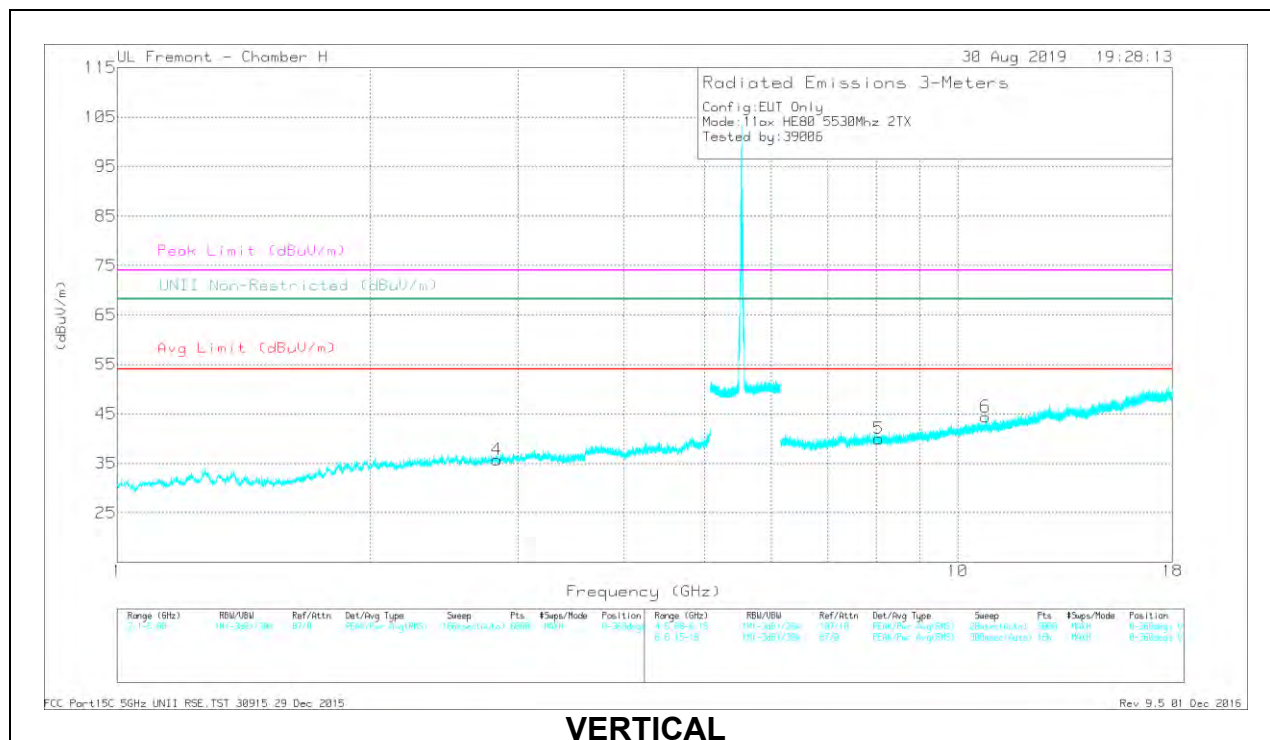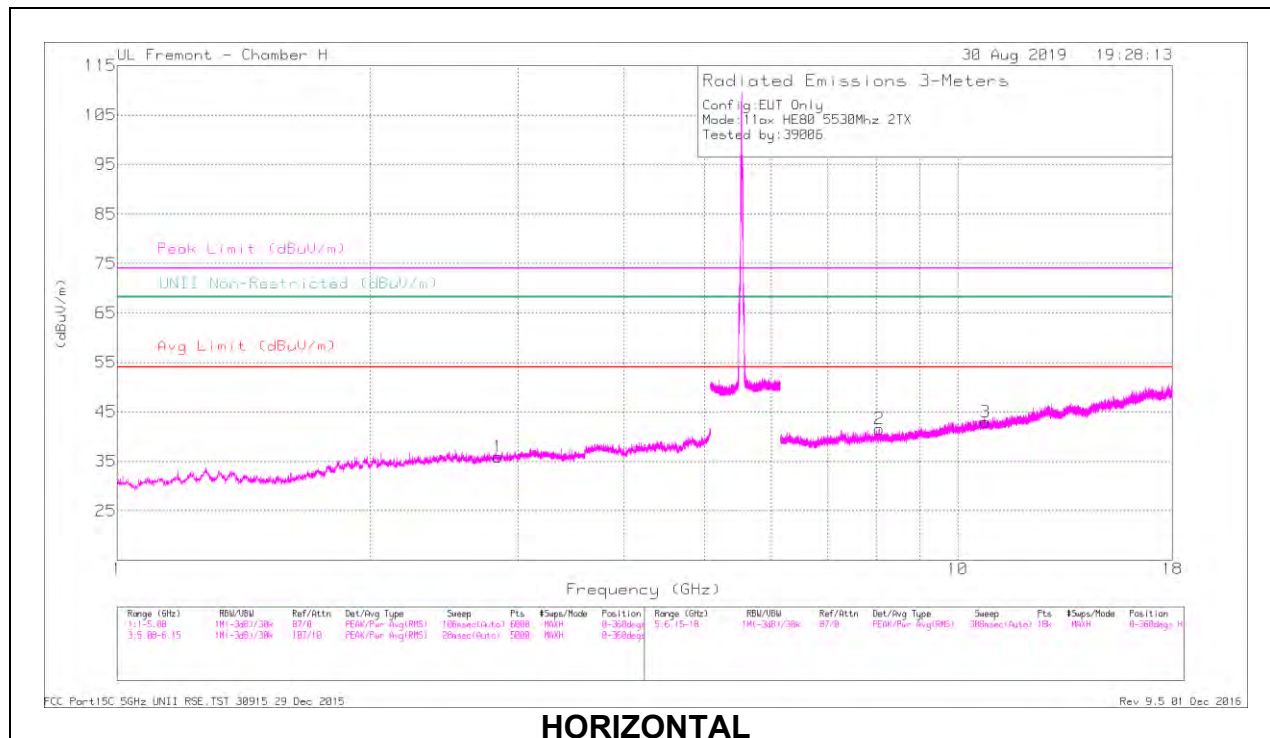

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.84	42.63	PK-U	32.4	-31.8	43.23	-	-	74	-30.77	53	131	H
	* 2.838	31.42	ADR	32.4	-31.8	32.02	54	-21.98	-	-	53	131	H
4	* 2.828	43.43	PK-U	32.4	-31.7	44.13	-	-	74	-29.87	87	151	V
	* 2.828	31.51	ADR	32.4	-31.7	32.21	54	-21.79	-	-	87	151	V
2	* 8.064	38.54	PK-U	36.1	-26.2	48.44	-	-	74	-25.56	110	181	H
	* 8.064	26.68	ADR	36.1	-26.2	36.58	54	-17.42	-	-	110	181	H
3	* 10.796	35.42	PK-U	37.6	-22.9	50.12	-	-	74	-23.88	160	201	H
	* 10.796	24.47	ADR	37.6	-22.9	39.17	54	-14.83	-	-	160	201	H
5	* 8.058	37.53	PK-U	36.1	-26.2	47.43	-	-	74	-26.57	120	142	V
	* 8.056	26.5	ADR	36.1	-26.2	36.4	54	-17.6	-	-	120	142	V
6	* 10.79	35.94	PK-U	37.6	-23.1	50.44	-	-	74	-23.56	75	195	V
	* 10.791	24.56	ADR	37.6	-23	39.16	54	-14.84	-	-	75	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

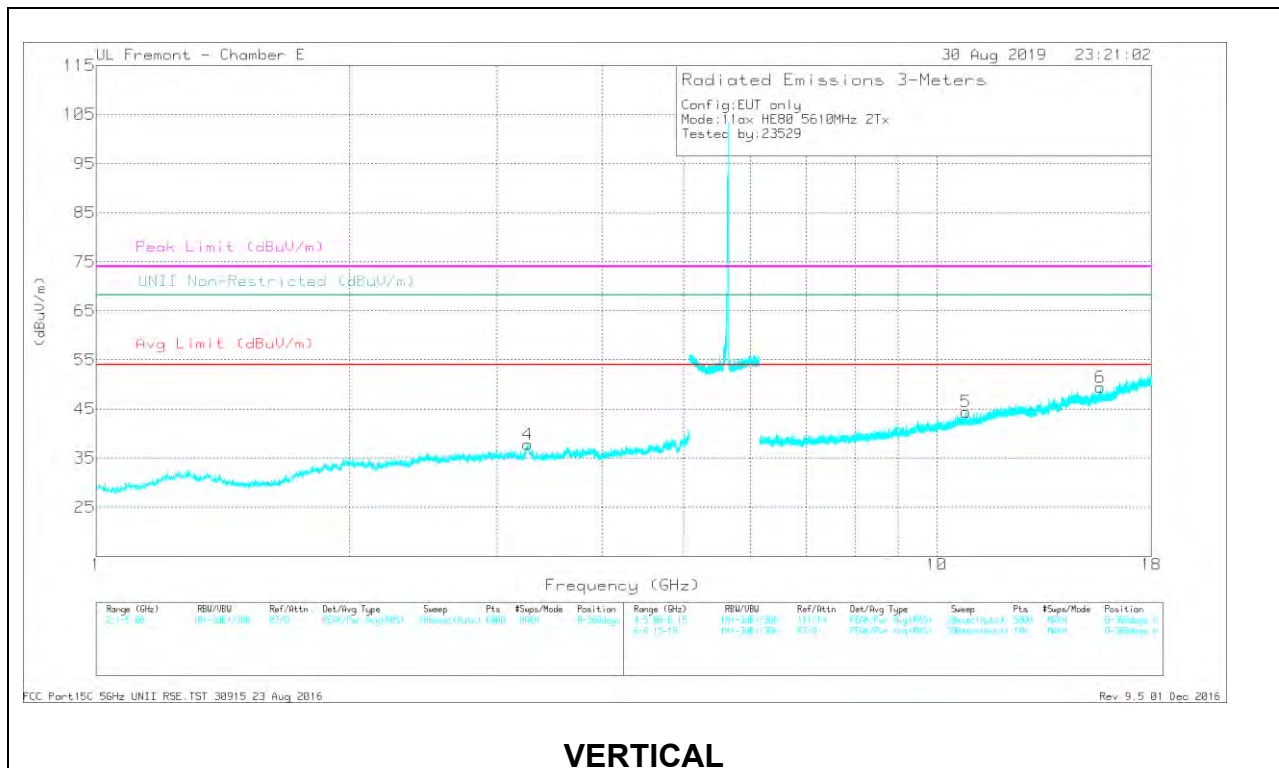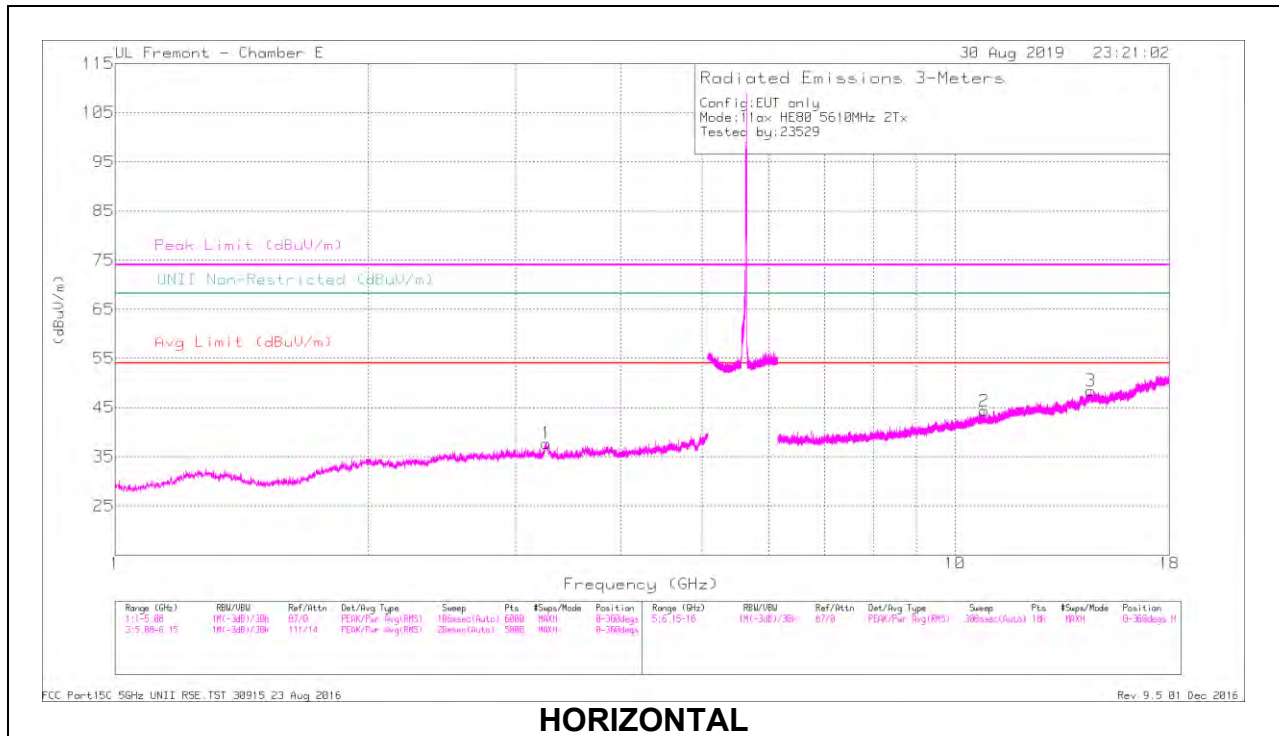

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Correcte d Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.261	44.92	PK-U	35.1	-34.5	45.52	-	-	74	-28.48	-	-	61	163	H
	* 3.261	33.22	ADR	35.1	-34.5	33.82	54	-20.18	-	-	-	-	61	163	H
4	* 3.261	45.13	PK-U	35.1	-34.5	45.73	-	-	74	-28.27	-	-	302	192	V
	* 3.261	33.26	ADR	35.1	-34.5	33.86	54	-20.14	-	-	-	-	302	192	V
2	* 10.828	36.73	PK-U	37.9	-25	49.63	-	-	74	-24.37	-	-	159	121	H
	* 10.831	26.05	ADR	37.9	-25	38.95	54	-15.05	-	-	-	-	159	121	H
5	* 10.832	36.77	PK-U	37.9	-25	49.67	-	-	74	-24.33	-	-	264	159	V
	* 10.83	26.21	ADR	37.9	-25	39.11	54	-14.89	-	-	-	-	264	159	V
6	* 15.646	35.56	PK-U	40.3	-20.7	55.16	-	-	74	-18.84	-	-	134	168	V
	* 15.649	24.62	ADR	40.3	-20.7	44.22	54	-9.78	-	-	-	-	134	168	V
3	14.511	35.4	PK-U	39.8	-20.6	54.6	-	-	-	-	68.2	-13.6	153	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

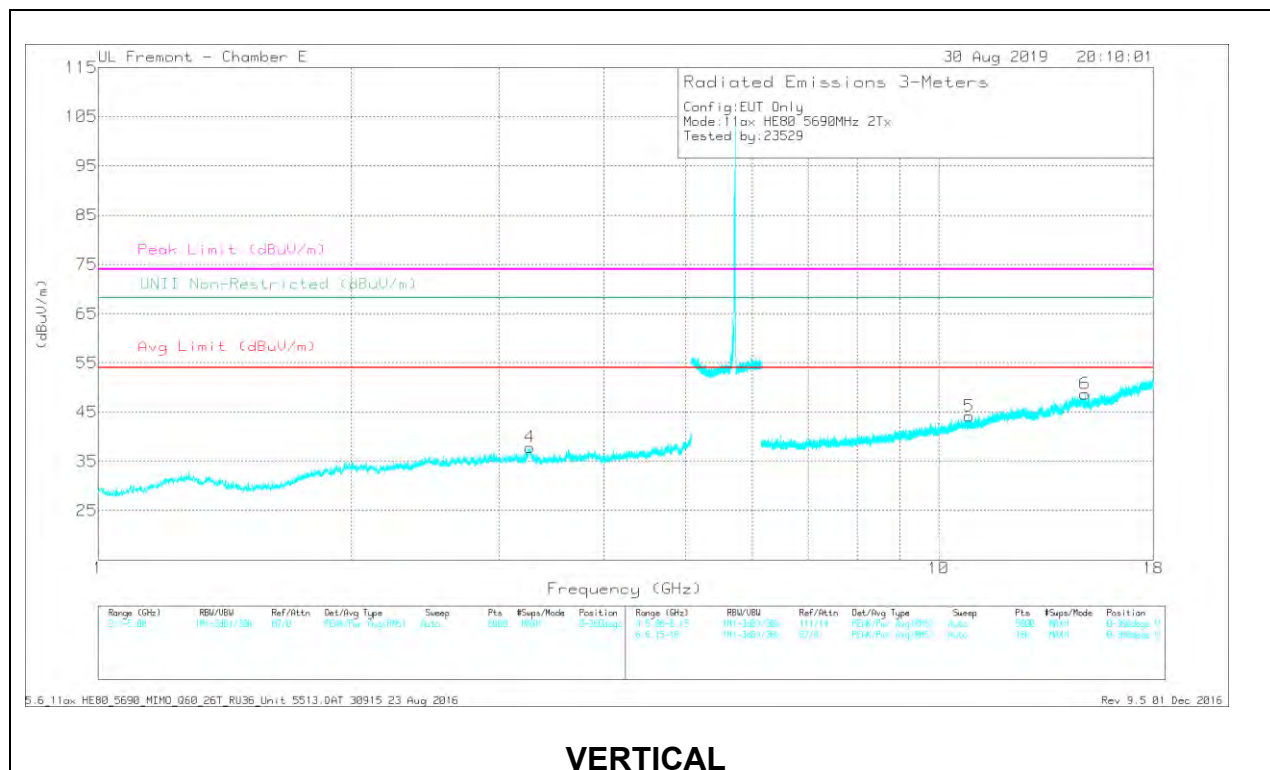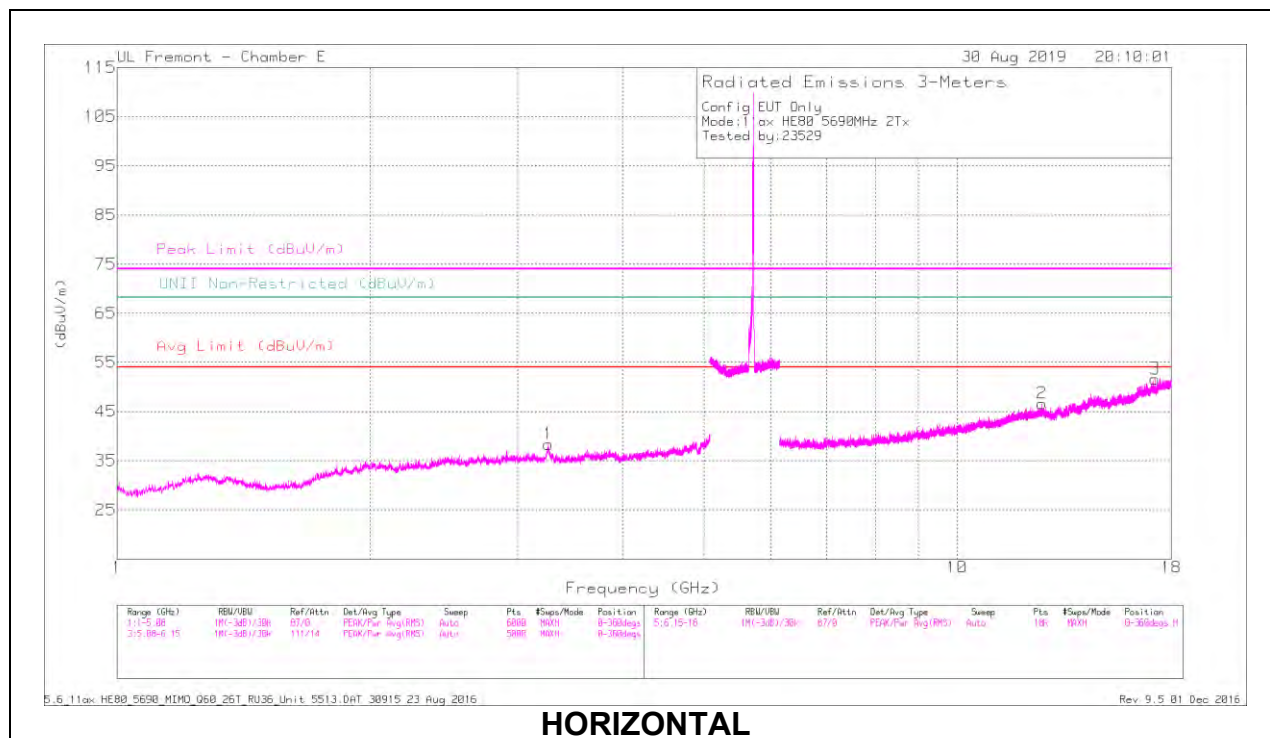

RADIATED EMISSIONS

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Correcte d Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.262	44.9	PK-U	35.1	-34.5	45.5	-	-	74	-28.5	-	-	187	163	H
	* 3.261	33.17	ADR	35.1	-34.5	33.77	54	-20.23	-	-	-	-	187	163	H
4	* 3.265	45.08	PK-U	35	-34.5	45.58	-	-	74	-28.42	-	-	300	192	V
	* 3.261	33.24	ADR	35.1	-34.5	33.84	54	-20.16	-	-	-	-	300	192	V
2	* 12.629	35.19	PK-U	39	-21.9	52.29	-	-	74	-21.71	-	-	226	188	H
	* 12.628	24.46	ADR	39	-22	41.46	54	-12.54	-	-	-	-	226	188	H
5	* 10.863	37.35	PK-U	38	-24.9	50.45	-	-	74	-23.55	-	-	86	201	V
	* 10.863	25.95	ADR	38	-24.9	39.05	54	-14.95	-	-	-	-	86	201	V
6	14.932	35.19	PK-U	39.8	-20.7	54.29	-	-	-	-	68.2	-13.91	196	177	V
3	17.205	35.61	PK-U	41.3	-19.5	57.41	-	-	-	-	68.2	-10.79	250	211	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.19. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX UAT2 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

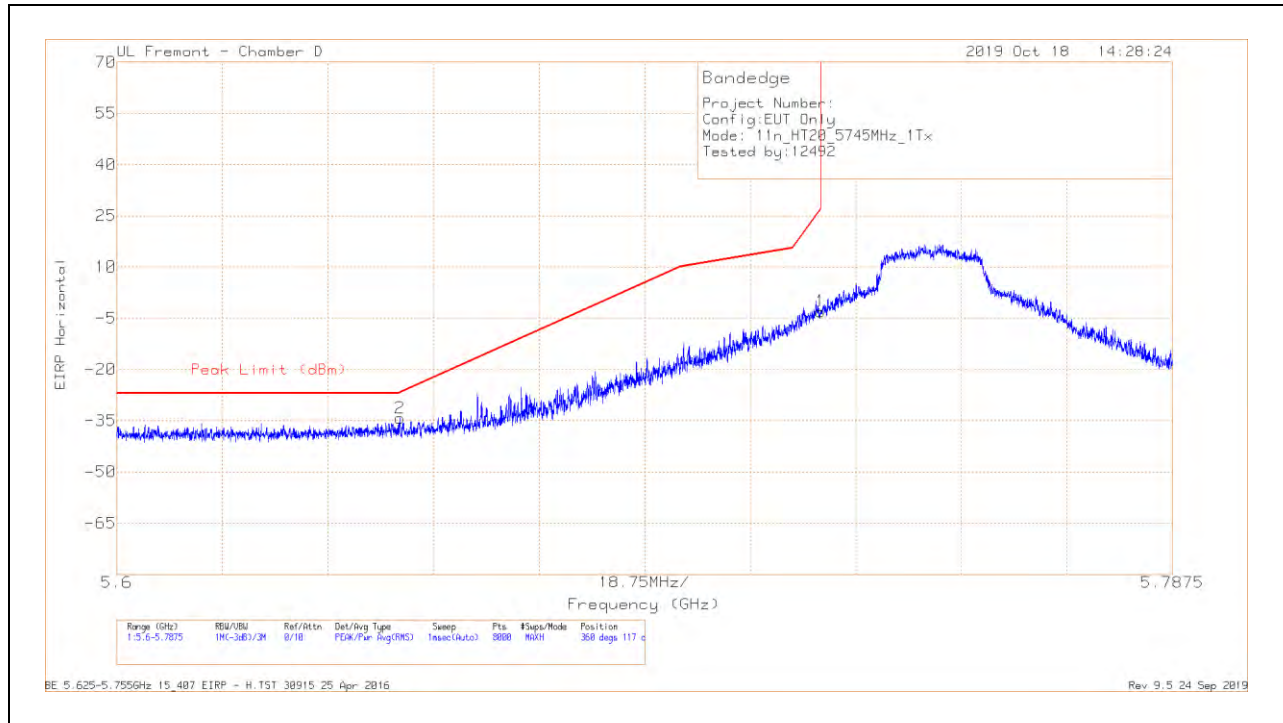

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65028	-63.14	Pk	34.5	-17.4	11.8	-34.24	-26.79	-7.45	360	117	H
1	5.72498	-31.69	Pk	34.6	-17.7	11.8	-2.99	26.96	-29.95	360	117	H

Pk - Peak detector

VERTICAL RESULT

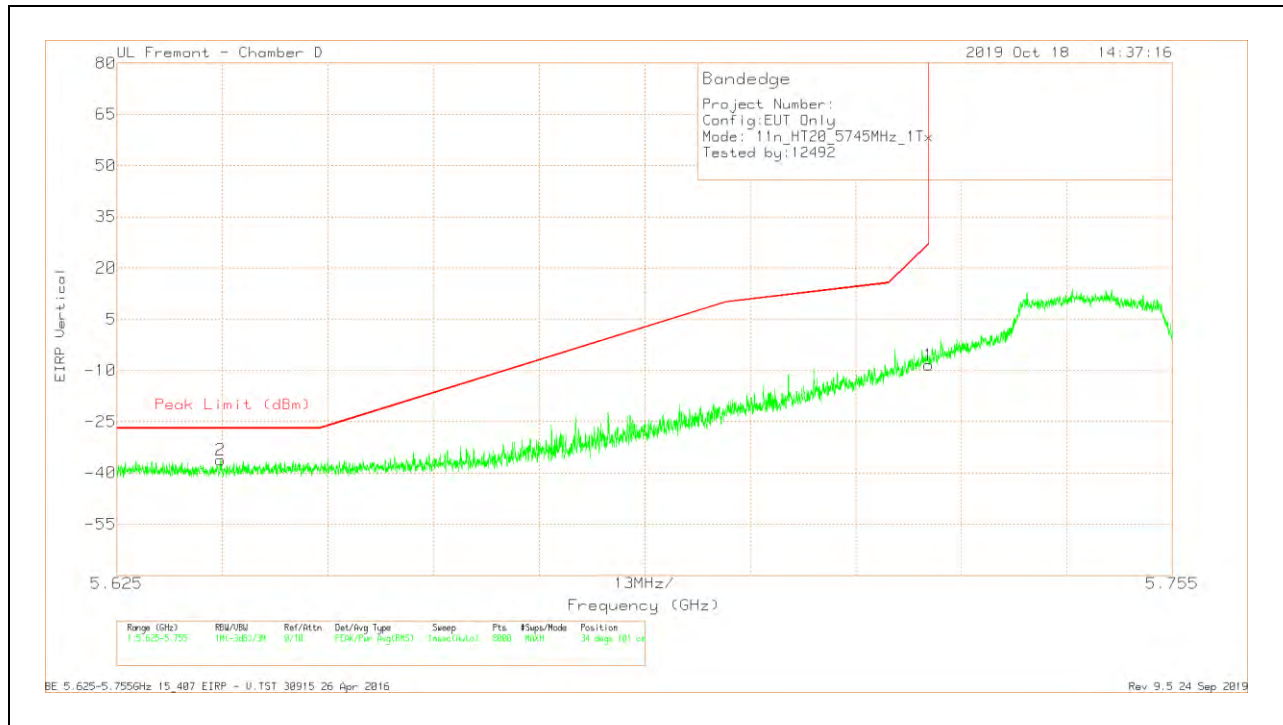


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63777	-36.12	Pk	34.5	-17.5	11.8	-36.12	-27	-9.12	34	101	V
1	5.725	-37.11	Pk	34.6	-17.7	11.8	-8.41	27	-35.41	34	101	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

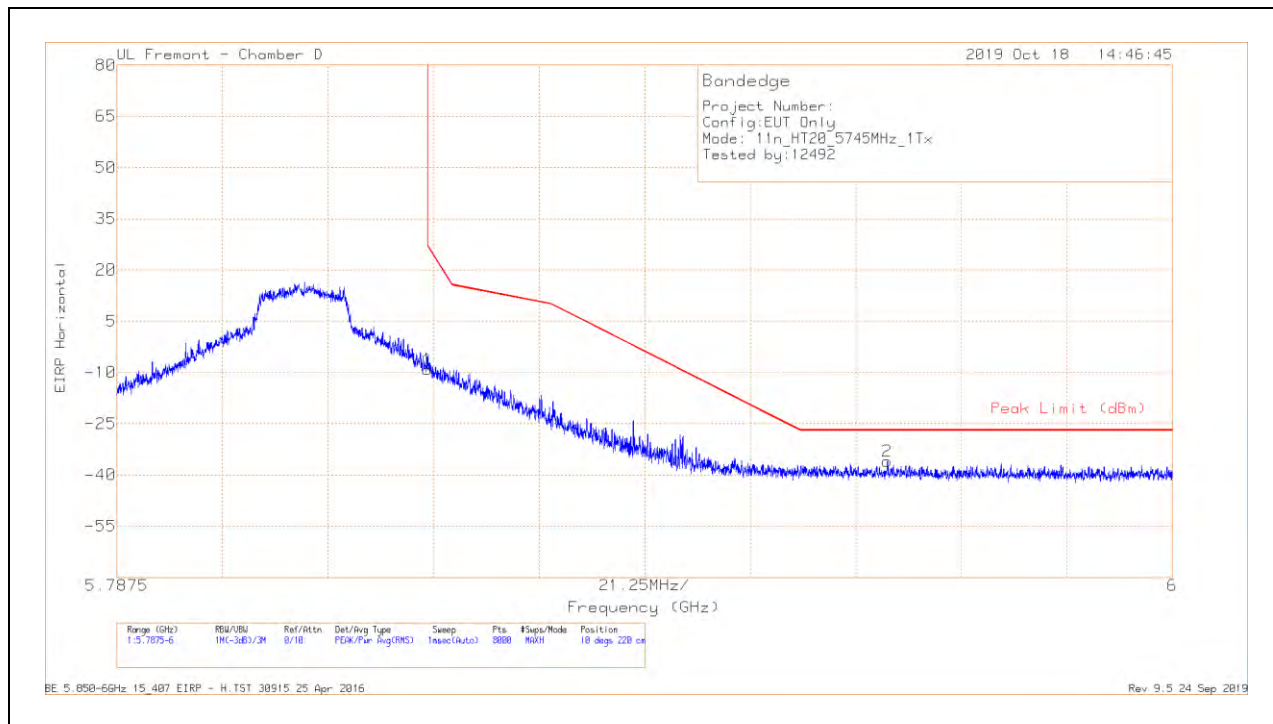

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-38.08	Pk	34.7	-17.5	11.8	-9.08	26.98	-36.06	10	220	H
2	5.94265	-65.49	Pk	35	-17.4	11.8	-36.09	-27	-9.09	10	220	H

Pk - Peak detector

VERTICAL RESULT

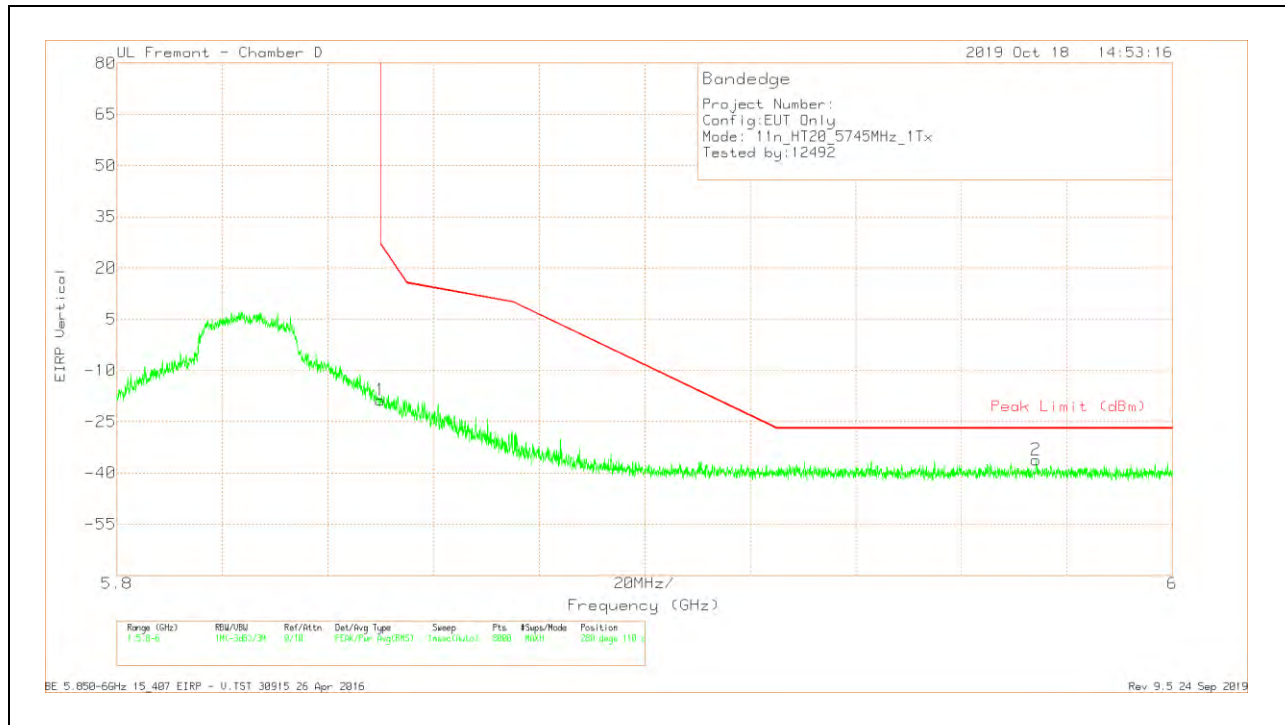


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.6	Pk	34.7	-17.5	11.8	-18.6	26.99	-45.59	280	110	V
2	5.97417	-65.3	Pk	35	-17.6	11.8	-36.1	-27	-9.1	280	110	V

Pk - Peak detector

1TX LAT3 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

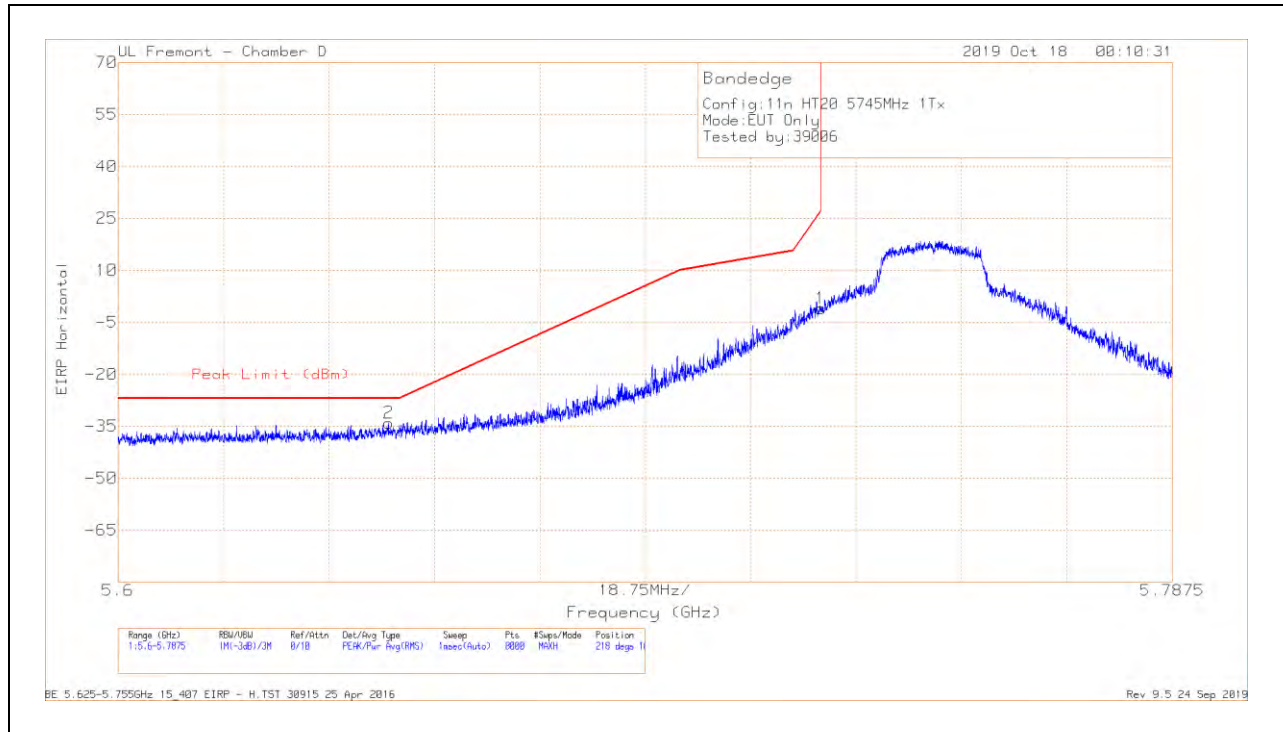

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6481	-63.03	Pk	34.5	-17.3	11.8	-34.03	-27	-7.03	218	167	H
1	5.72498	-29.69	Pk	34.6	-17.7	11.8	-9.99	26.96	-27.95	218	167	H

Pk - Peak detector

VERTICAL RESULT

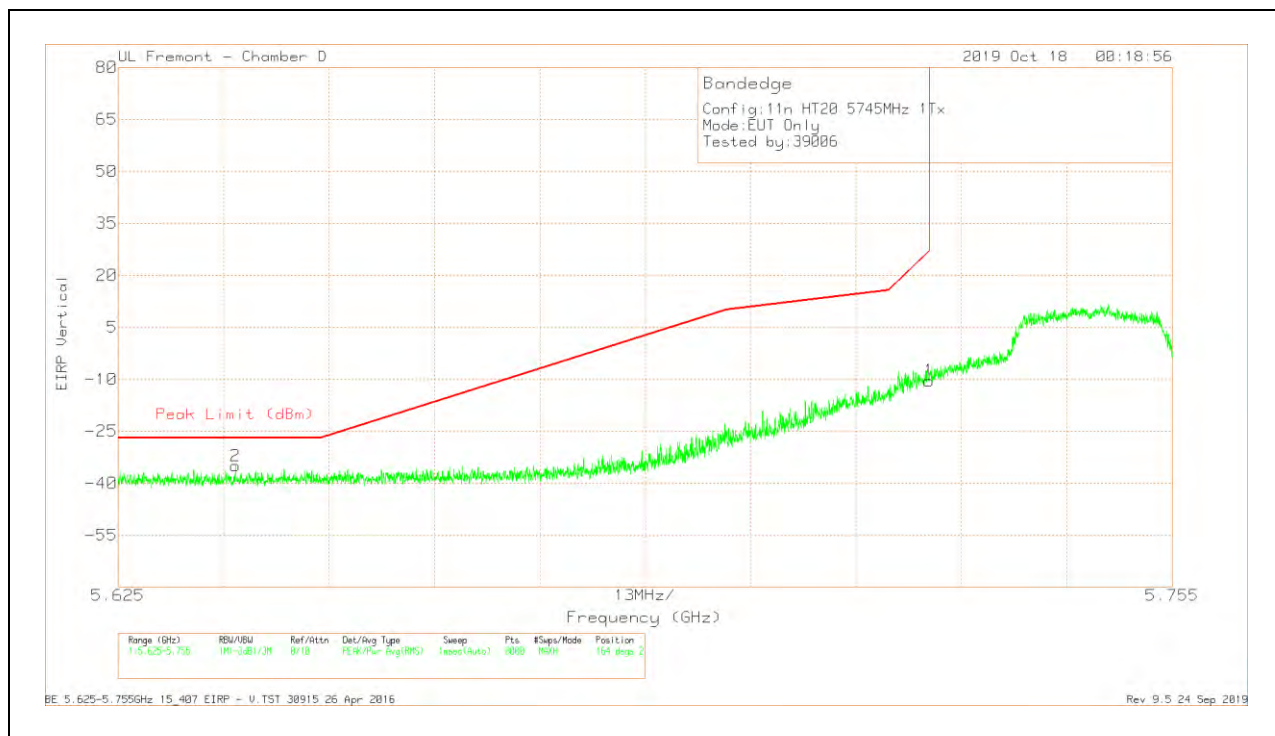


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63948	-63.76	Pk	34.5	-17.5	11.8	-34.96	-27	-7.96	164	219	V
1	5.725	-39.11	Pk	34.6	-17.7	11.8	-10.41	27	-37.41	164	219	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

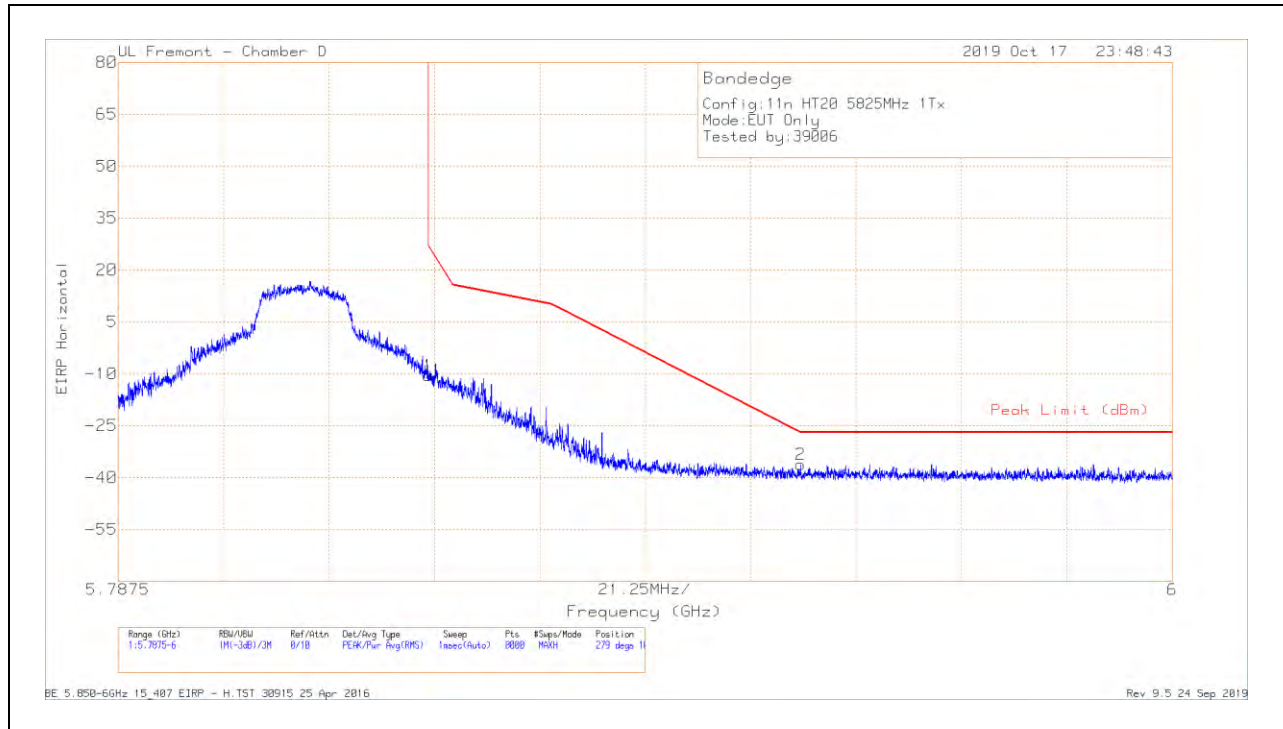

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-39.51	Pk	34.7	-17.5	11.8	-10.51	26.98	-37.49	279	101	H
2	5.92503	-65.43	Pk	34.9	-17.5	11.8	-36.23	-27	-9.23	279	101	H

Pk - Peak detector

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-42.42	Pk	34.7	-17.5	11.8	-13.42	26.99	-40.41	232	256	V
2	5.93714	-65.64	Pk	34.9	-17.5	11.8	-36.44	-27	-9.44	232	256	V

Pk - Peak detector

2TX UAT2 + LAT3 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

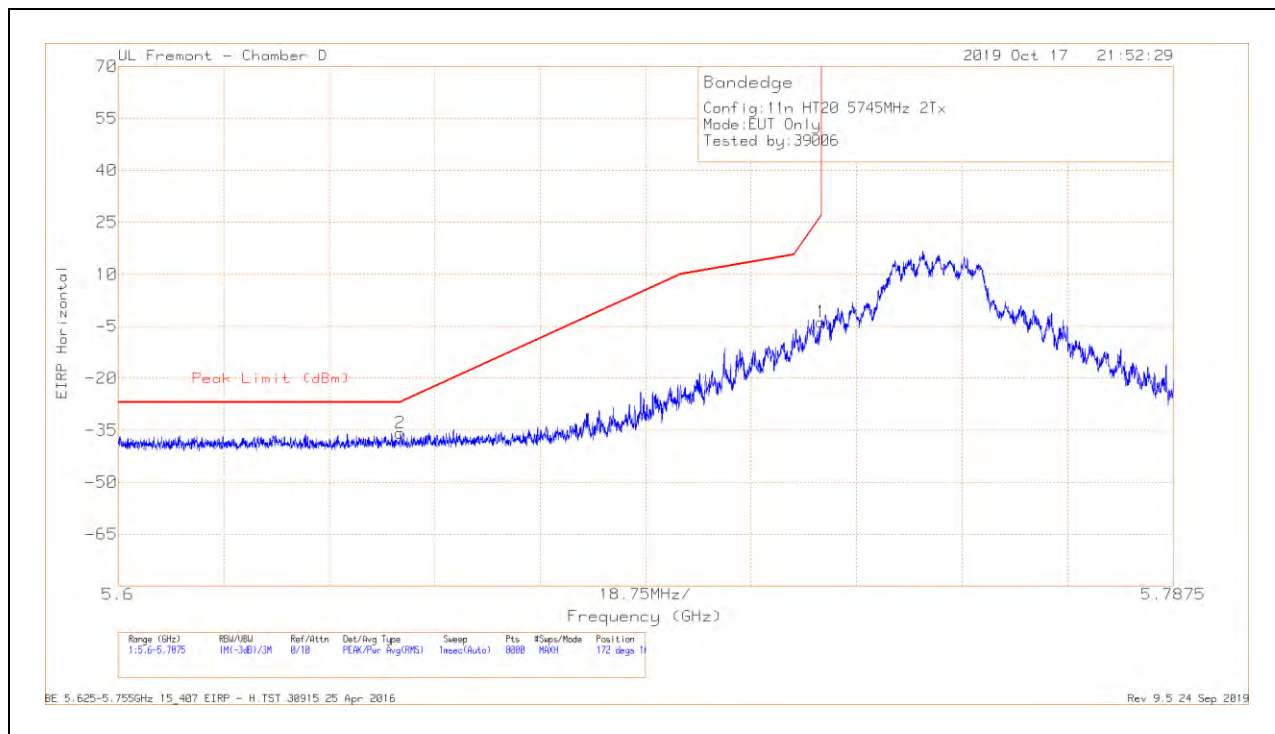

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65016	-64.68	Pk	34.5	-17.4	11.8	-35.78	-26.88	-8.9	172	162	H
1	5.72498	-32.46	Pk	34.6	-17.7	11.8	-3.76	26.96	-30.72	172	162	H

Pk - Peak detector

VERTICAL RESULT

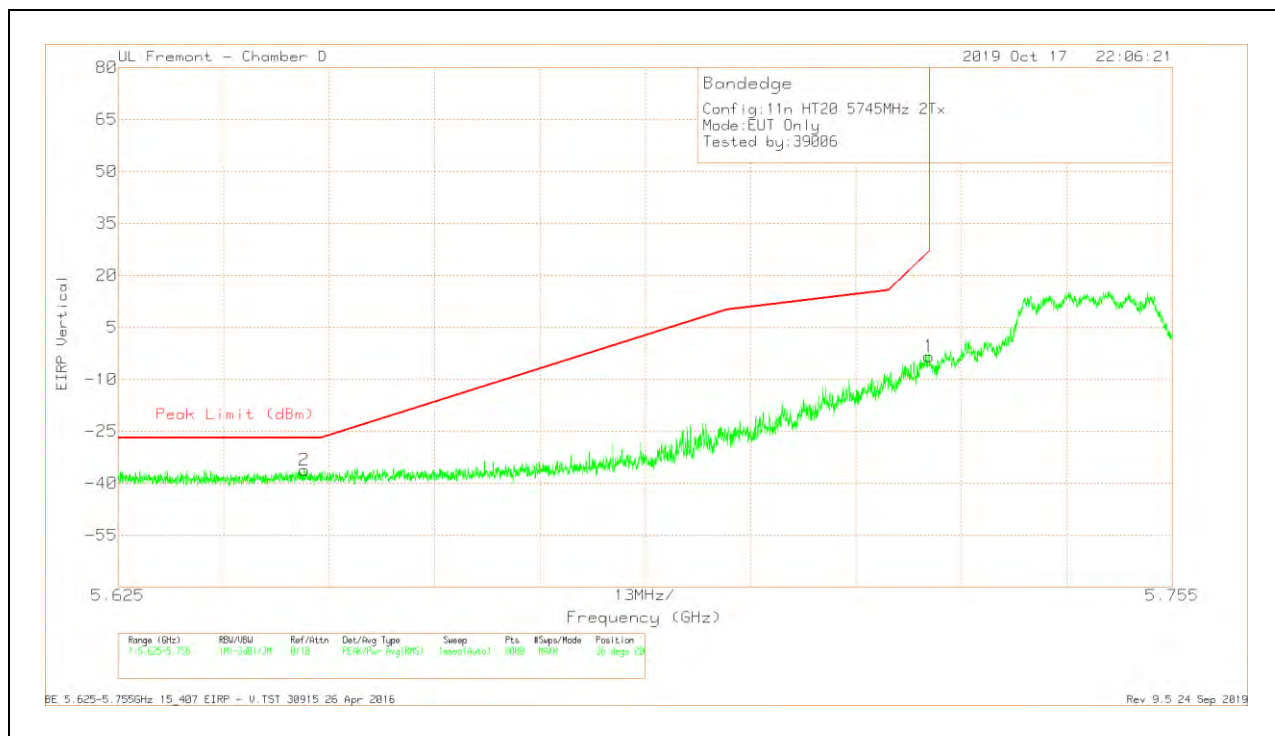


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64796	-65.16	Pk	34.5	-17.3	11.8	-36.16	-27	-9.16	36	200	V
1	5.725	-32.07	Pk	34.6	-17.7	11.8	-3.37	27	-30.37	36	200	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

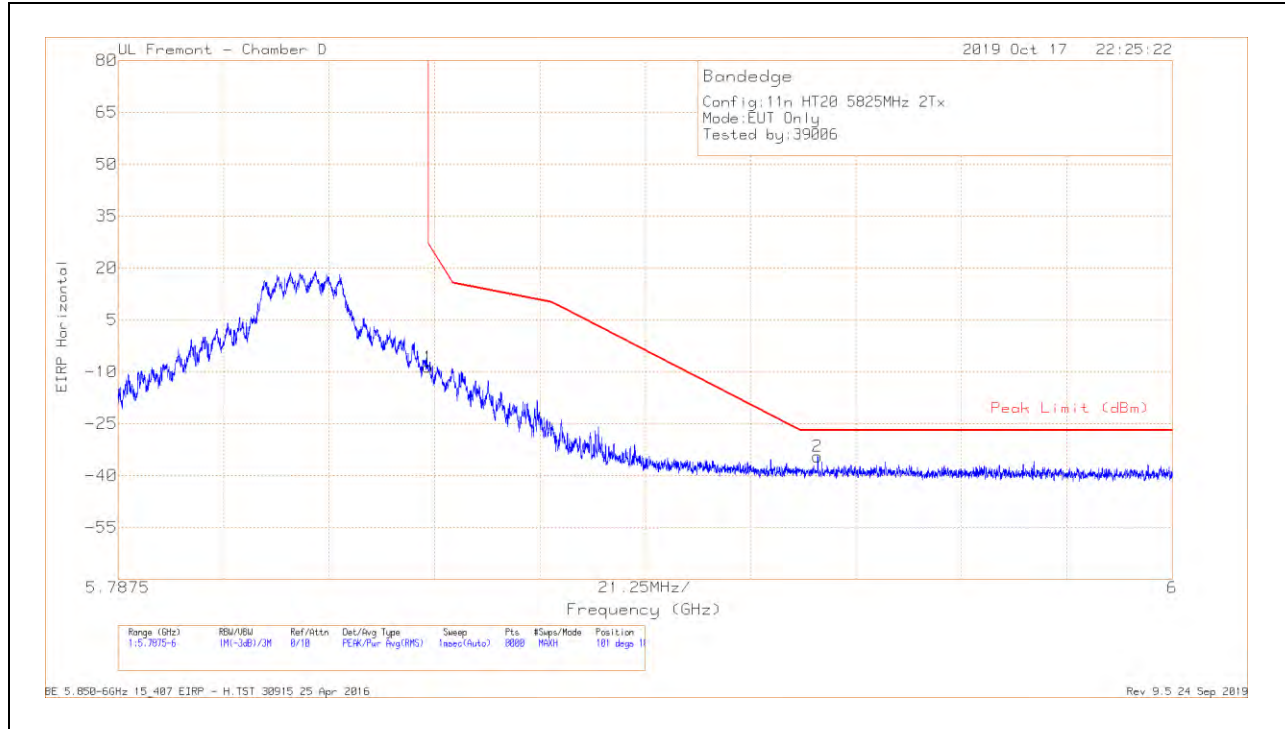

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-37.72	Pk	34.7	-17.5	11.8	-8.72	26.98	-35.7	101	186	H
2	5.92854	-63.78	Pk	34.9	-17.4	11.8	-34.48	-27	-7.48	101	186	H

Pk - Peak detector

VERTICAL RESULT


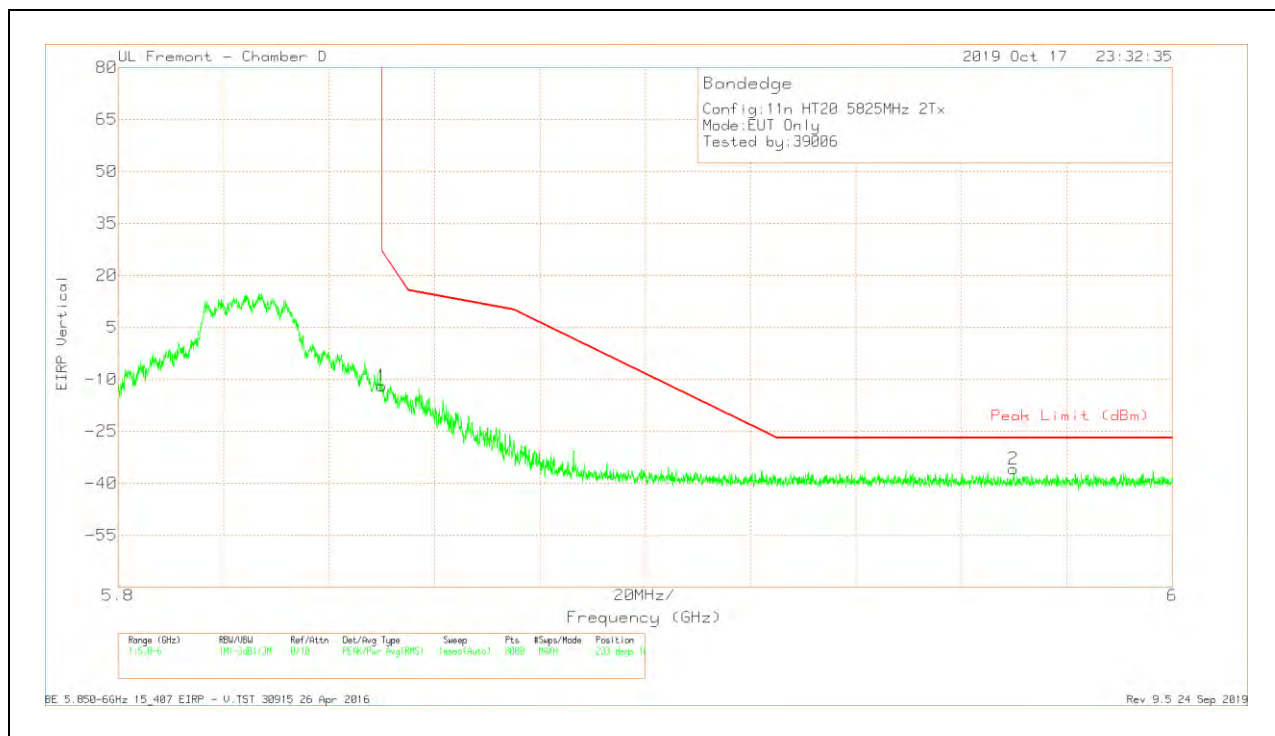


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-40.92	Pk	34.7	-17.5	11.8	-11.92	26.99	-38.91	233	167	V
2	5.96987	-64.9	Pk	34.9	-17.6	11.8	-35.8	-27	-8.8	233	167	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

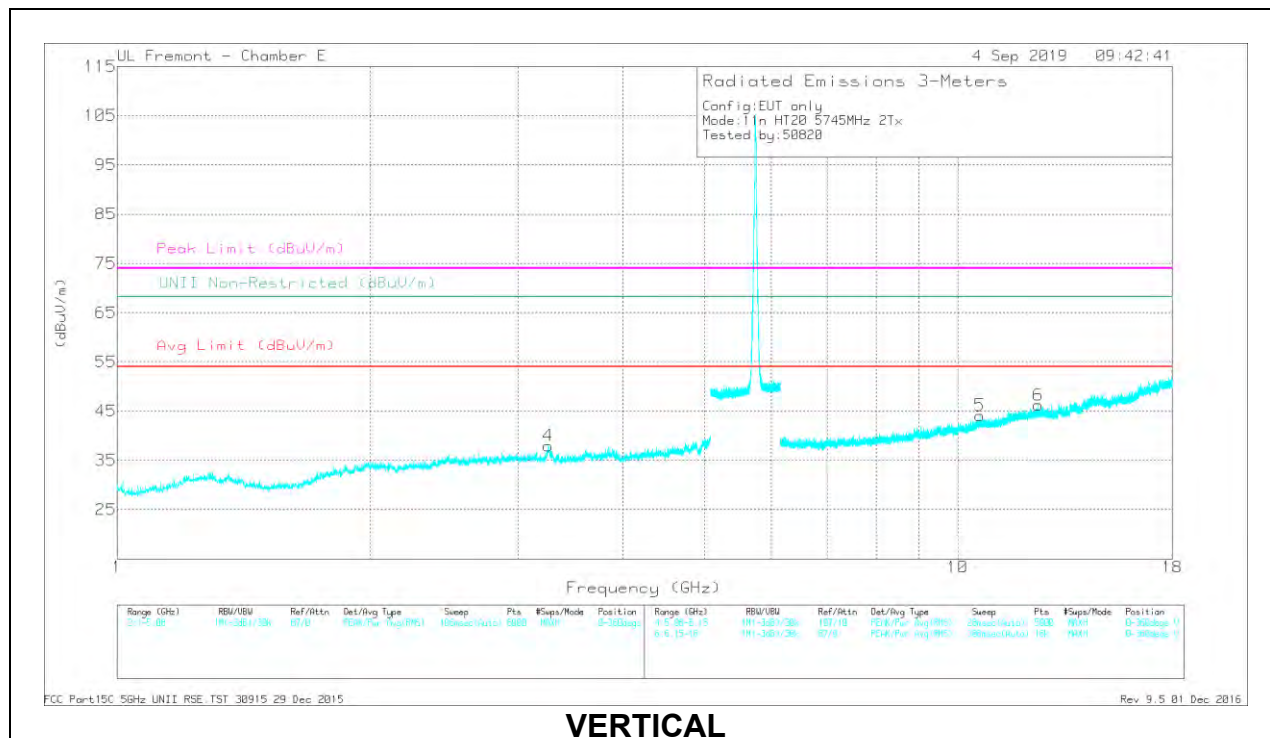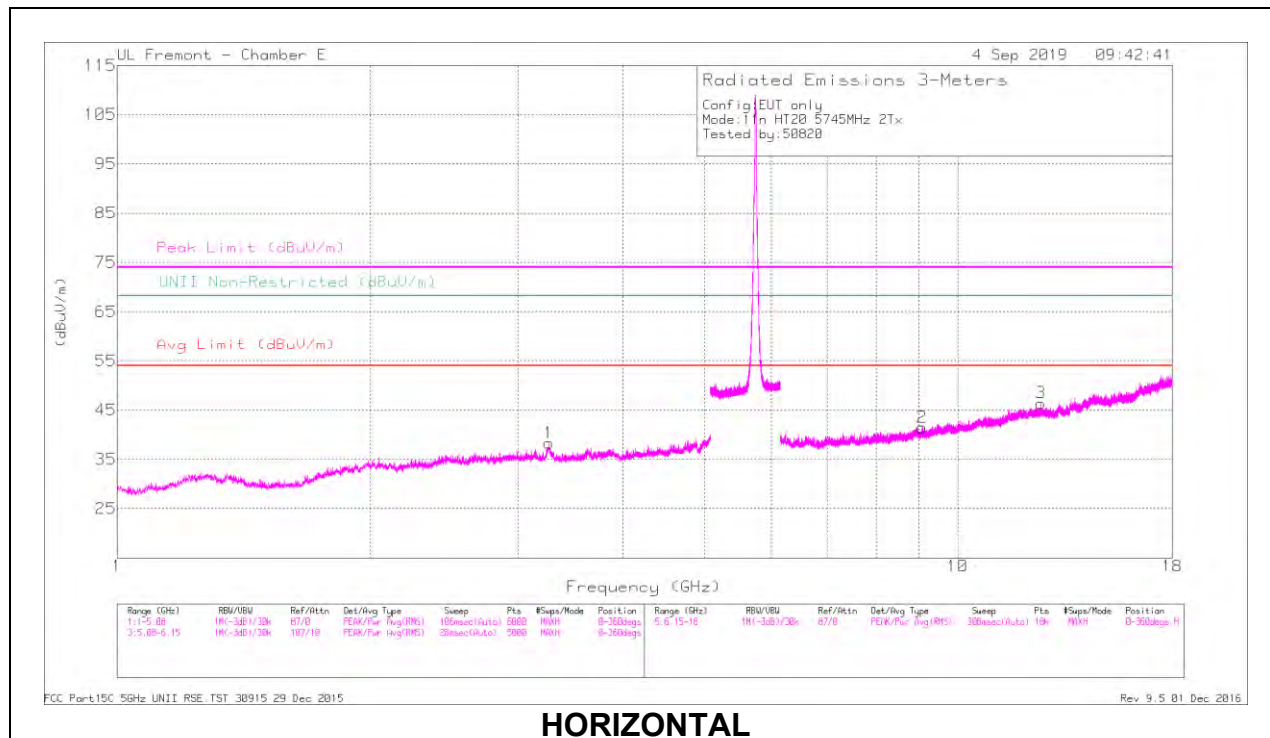

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.263	44.91	PK-U	35.1	-34.5	45.51	-	-	74	-28.49	42	220	H
	* 3.263	32.79	ADR	35.1	-34.5	33.39	54	-20.61	-	-	42	220	H
4	* 3.262	44.86	PK-U	35.1	-34.5	45.46	-	-	74	-28.54	348	252	V
	* 3.261	32.85	ADR	35.1	-34.5	33.45	54	-20.55	-	-	348	252	V
2	* 9.066	37.43	PK-U	36.2	-25.3	48.33	-	-	74	-25.67	288	168	H
	* 9.067	25.61	ADR	36.1	-25.4	36.31	54	-17.69	-	-	288	168	H
3	* 12.557	35.2	PK-U	39	-22.1	52.1	-	-	74	-21.9	99	386	H
	* 12.555	23.76	ADR	39	-22.1	40.66	54	-13.34	-	-	99	386	H
5	* 10.626	37.94	PK-U	37.9	-24.9	50.94	-	-	74	-23.06	271	223	V
	* 10.627	25.78	ADR	37.8	-24.9	38.68	54	-15.32	-	-	271	223	V
6	* 12.473	35.57	PK-U	39	-22.3	52.27	-	-	74	-21.73	46	238	V
	* 12.472	23.96	ADR	39	-22.3	40.66	54	-13.34	-	-	46	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UL Fremont - Chamber E

4 Sep 2019 13:11:51

Radiated Emissions 3-Meters

Config: EUT only
Mode: 1m HT20 5.785MHz 2Tx
Tested by: 50820

Peak Limit (dBuV/m)
UNII Non-Restricted (dBuV/m)
Avg Limit (dBuV/m)

Frequency (GHz)

Range (GHz)	RBW/VBW	Ref/Att	Det/Avg Type	Sweep	Pls	#Sups/Mode	Position	Range (GHz)	RBW/VBW	Ref/Att	Det/Avg Type	Sweep	Pls	#Sups/Mode	Position
1-15.85	1K-3dB/1.0K	07.0	PEAK/Fir	10msac(Auto)	5000	NOH	0-350steps	5.6-15.10	1K-3dB/1.0K	07.0	PEAK/Fir	10msac(Auto)	10k	NOH	0-350steps
3-5.85-6.15	1K-3dB/1.0K	187.7dB	PEAK/Fir	20msac(Auto)	5000	NOH	9-350steps								

FCC Part15C 5GHz UNII RSE TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2015

UL Fremont - Chamber E

4 Sep 2019 13:11:51

Radiated Emissions 3-Meters

Config: EUT only
Mode: 1 in HT20 5785MHz 2Tx
Tested by: 50820

Peak Limit (dBuV/m)
UNII Non-Restricted (dBuV/m)
Avg Limit (dBuV/m)

4

5

5

Frequency (GHz)

Range (GHz)	RBW/VBW	Ref/BW	Det/Avg Type	Sweep	Pls	#Seps/Mode	Position
1-12.00	100kHz/30k	07/0	RBW/Freq	100ms/100Hz	6000	RBW	0-30000

Range (GHz)	RBW/VBW	Ref/BW	Det/Avg Type	Sweep	Pls	#Seps/Mode	Position
11.5-12.15	100kHz/30k	10/0	RBW/Freq	100ms/100Hz	6000	RBW	0-30000

FCC Part 15C 5GHz UNII RSF IST 30915 29 Dec 2015

Rev 9.5 B1 Dec 2015

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 3.263	44.74	PK-U	35.1	-34.5	45.34	-	-	74	-28.66	-	-	321	328	V
	* 3.261	32.9	ADR	35.1	-34.5	33.5	54	-20.5	-	-	-	-	321	328	V
2	* 9.474	36.7	PK-U	36.6	-24.6	48.7	-	-	74	-25.3	-	-	150	371	H
	* 9.476	25.18	ADR	36.6	-24.6	37.18	54	-16.82	-	-	-	-	150	371	H
3	* 11.563	37.22	PK-U	38.6	-23.4	52.42	-	-	74	-21.58	-	-	189	339	H
	* 11.566	25.24	ADR	38.6	-23.4	40.44	54	-13.56	-	-	-	-	189	339	H
5	* 9.381	37.59	PK-U	36.4	-25.5	48.49	-	-	74	-25.51	-	-	214	379	V
	* 9.382	25.64	ADR	36.4	-25.5	36.54	54	-17.46	-	-	-	-	214	379	V
6	* 11.568	37.32	PK-U	38.6	-23.4	52.52	-	-	74	-21.48	-	-	227	103	V
	* 11.57	25.61	ADR	38.6	-23.4	40.81	54	-13.19	-	-	-	-	227	103	V
1	3.255	45.07	PK-U	34.7	-34.6	45.17	-	-	-	-	68.2	-23.03	118	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

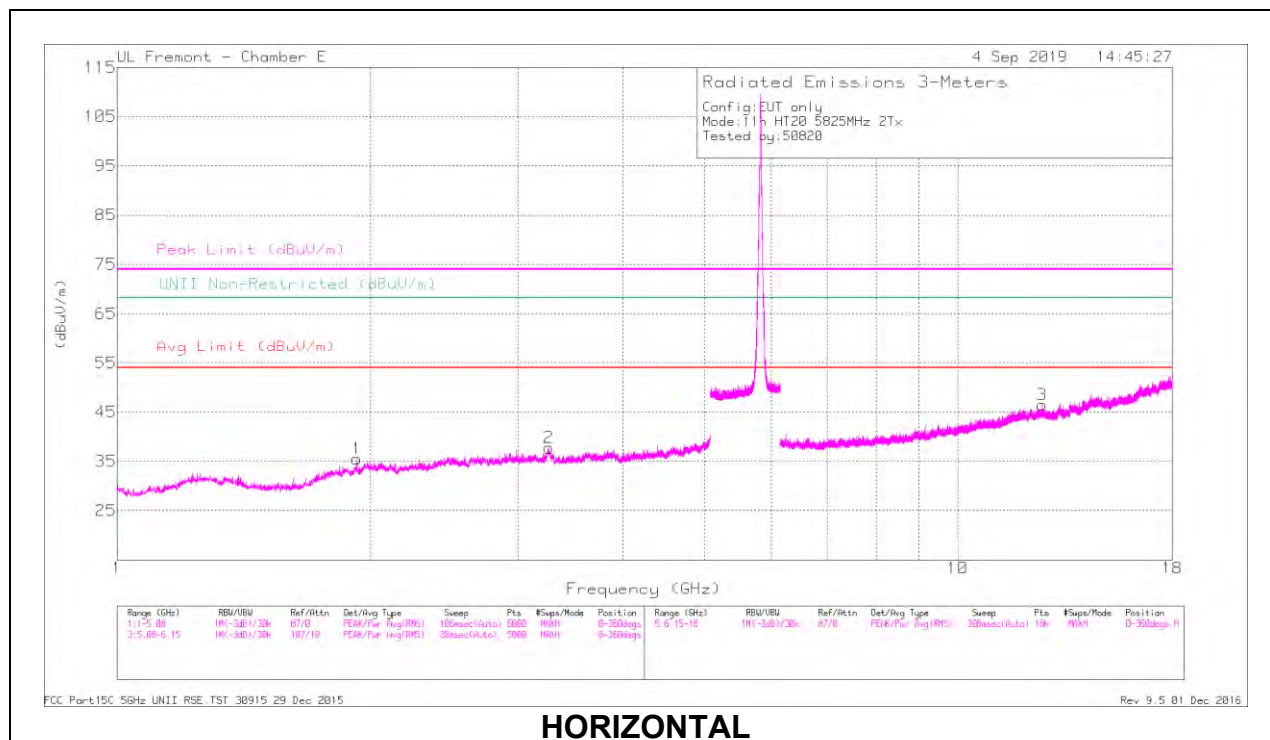

HORIZONTAL

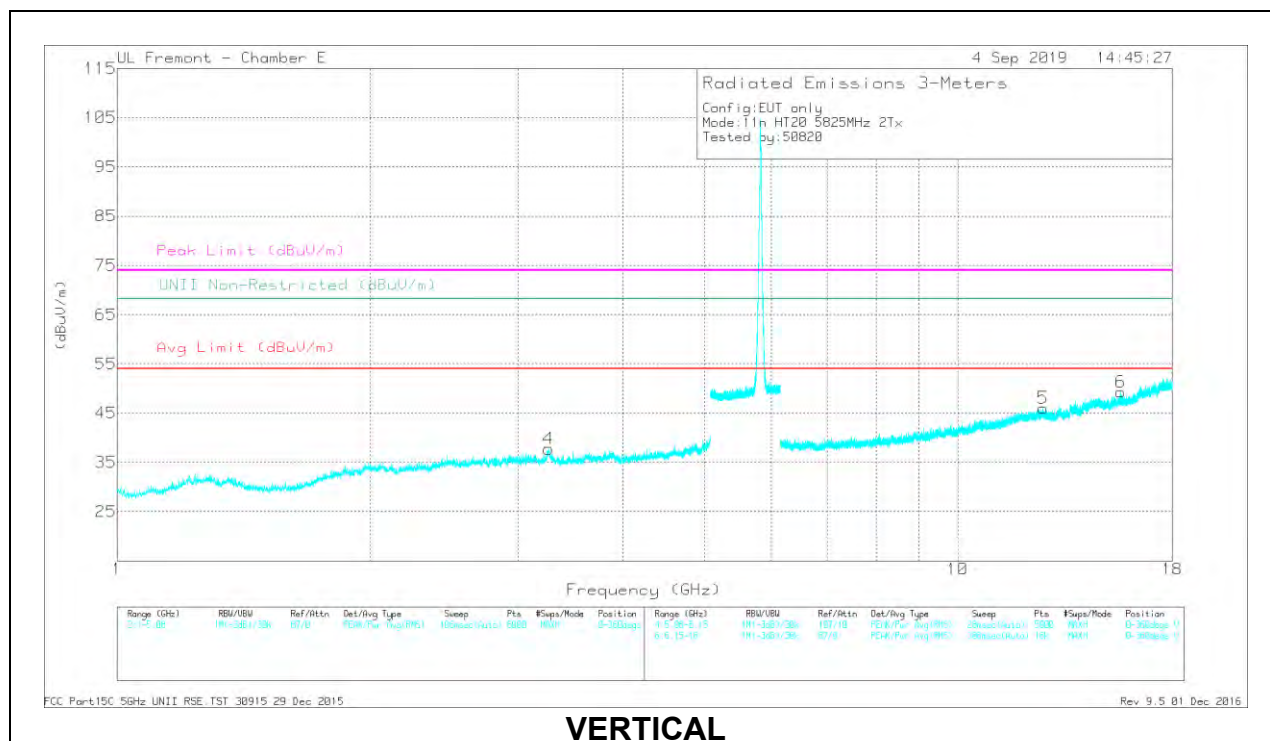

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.266	44.74	PK-U	35	-34.5	45.24	-	-	74	-28.76	-	-	338	195	H
	* 3.262	32.74	ADR	35.1	-34.5	33.34	54	-20.66	-	-	-	-	338	195	H
4	* 3.263	44.97	PK-U	35.1	-34.5	45.57	-	-	74	-28.43	-	-	95	263	V
	* 3.26	32.82	ADR	35.1	-34.5	33.42	54	-20.58	-	-	-	-	95	263	V
3	* 12.604	35.47	PK-U	39.1	-21.9	52.67	-	-	74	-21.33	-	-	170	214	H
	* 12.603	23.64	ADR	39.1	-21.8	40.94	54	-13.06	-	-	-	-	170	214	H
5	* 12.633	35.49	PK-U	39	-21.9	52.59	-	-	74	-21.41	-	-	108	132	V
	* 12.634	23.71	ADR	39	-21.9	40.81	54	-13.19	-	-	-	-	108	132	V
6	* 15.632	35.5	PK-U	40.3	-20.6	55.2	-	-	74	-18.8	-	-	232	295	V
	* 15.636	23.97	ADR	40.3	-20.6	43.67	54	-10.33	-	-	-	-	232	295	V
1	1.928	45.77	PK-U	31.4	-35.5	41.67	-	-	-	-	68.2	-26.53	14	196	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.20. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX UAT2 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

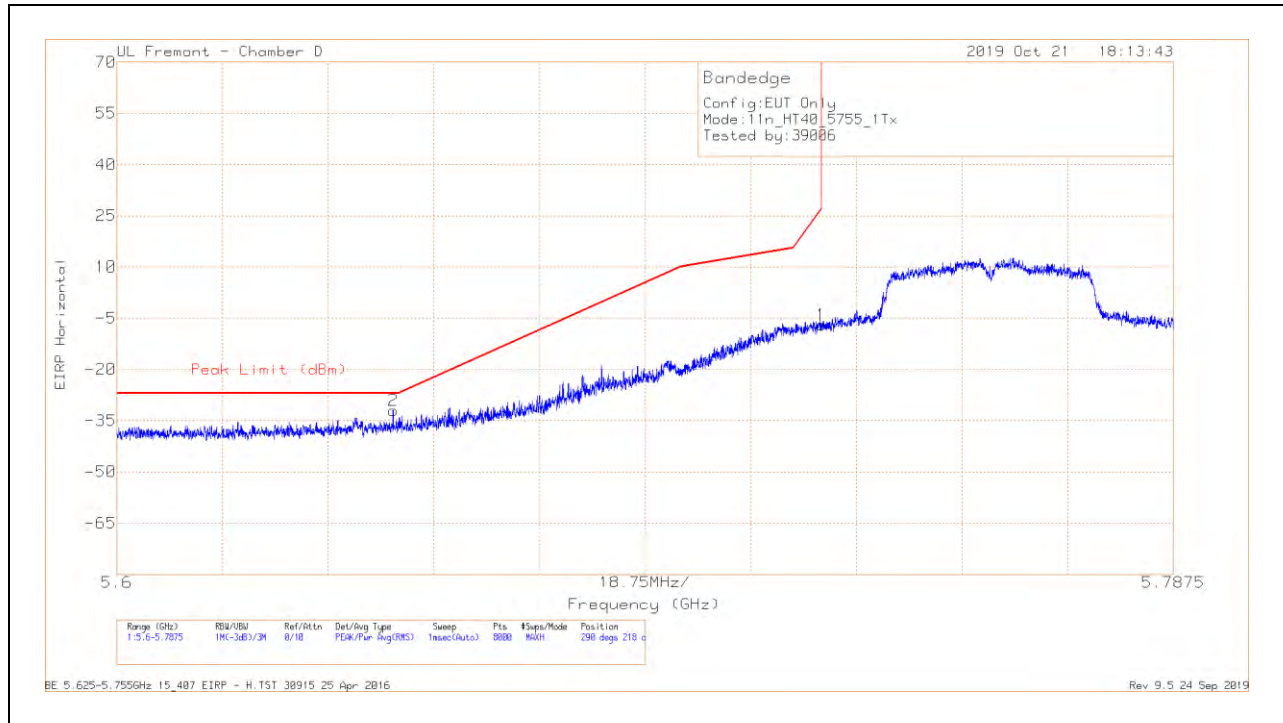

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64901	-61.05	Pk	34.5	-17.3	11.8	0	-32.05	-27	-5.05	290	218	H
1	5.72498	-35.72	Pk	34.6	-17.7	11.8	0	-7.02	26.96	-33.98	290	218	H

Pk - Peak detector

VERTICAL RESULT

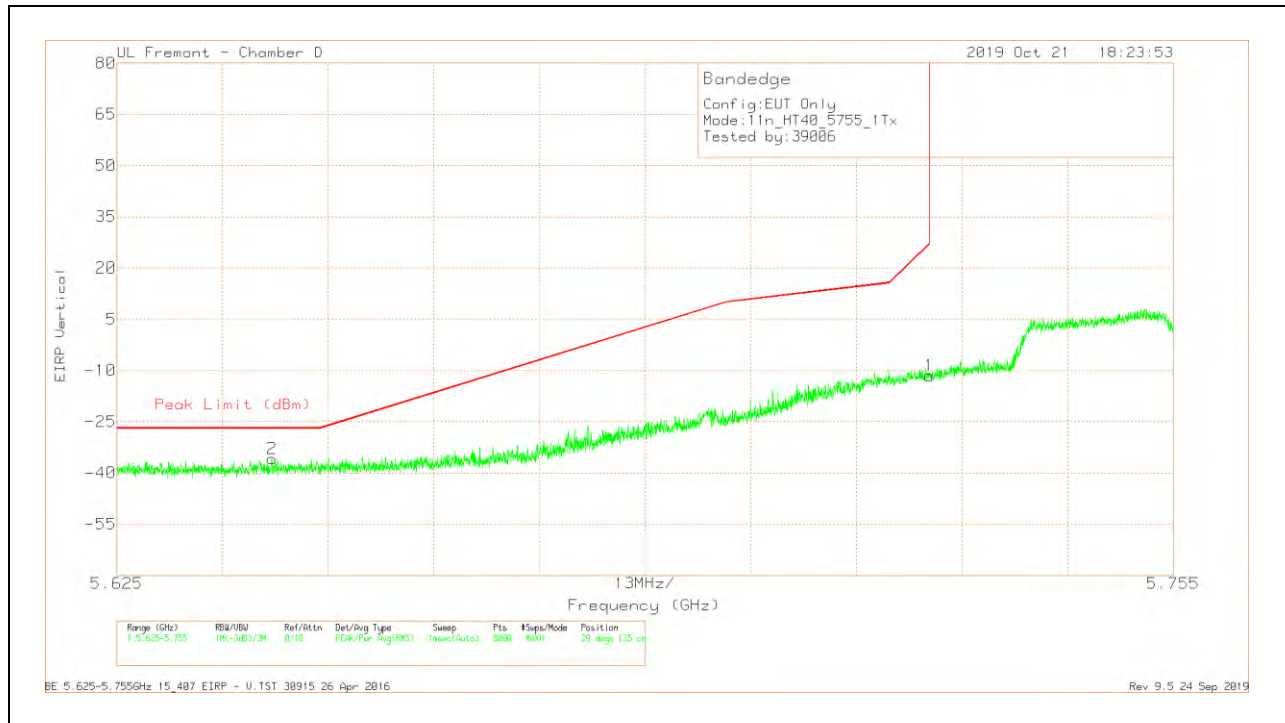


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64406	-64.9	Pk	34.6	-17.4	11.8	0	-35.9	-27	-8.9	29	135	V
1	5.725	-40.18	Pk	34.6	-17.7	11.8	0	-11.48	-27	-38.48	29	135	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

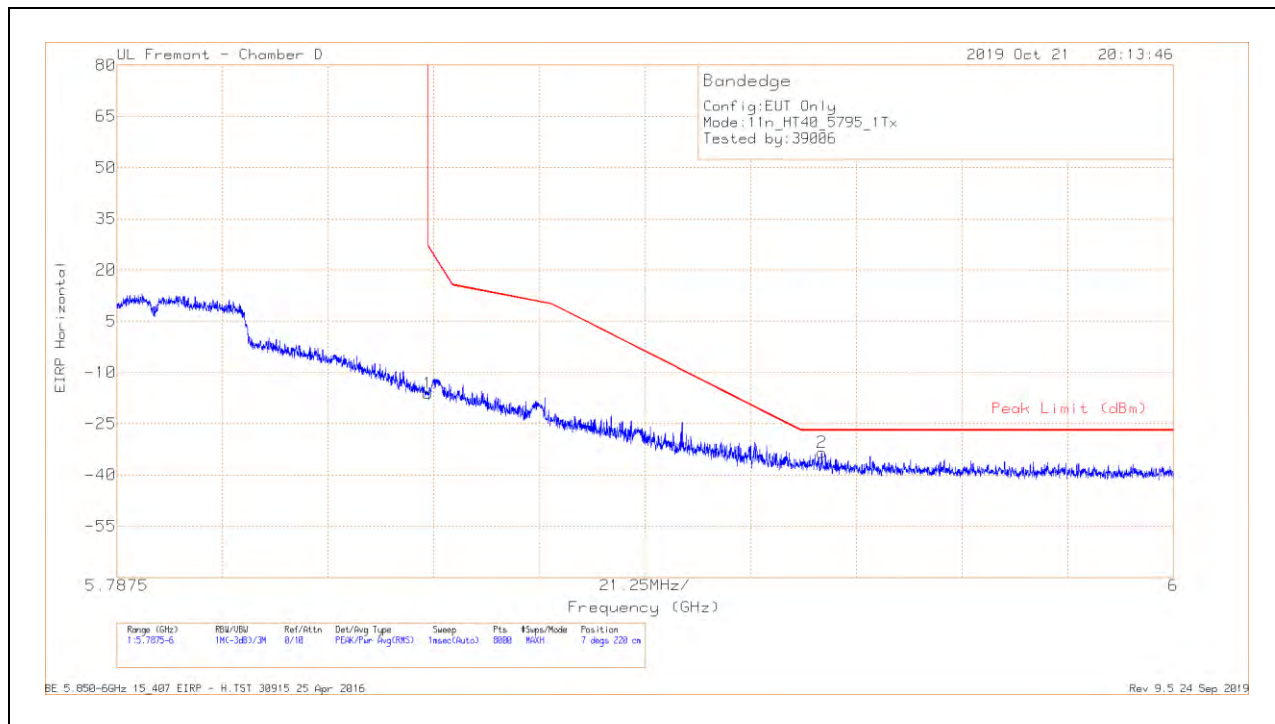

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-45.07	Pk	34.7	-17.5	11.8	0	-16.07	26.98	-43.05	7	220	H
2	5.92926	-62.79	Pk	34.9	-17.4	11.8	0	-33.49	-27	-6.49	7	220	H

Pk - Peak detector

VERTICAL RESULT

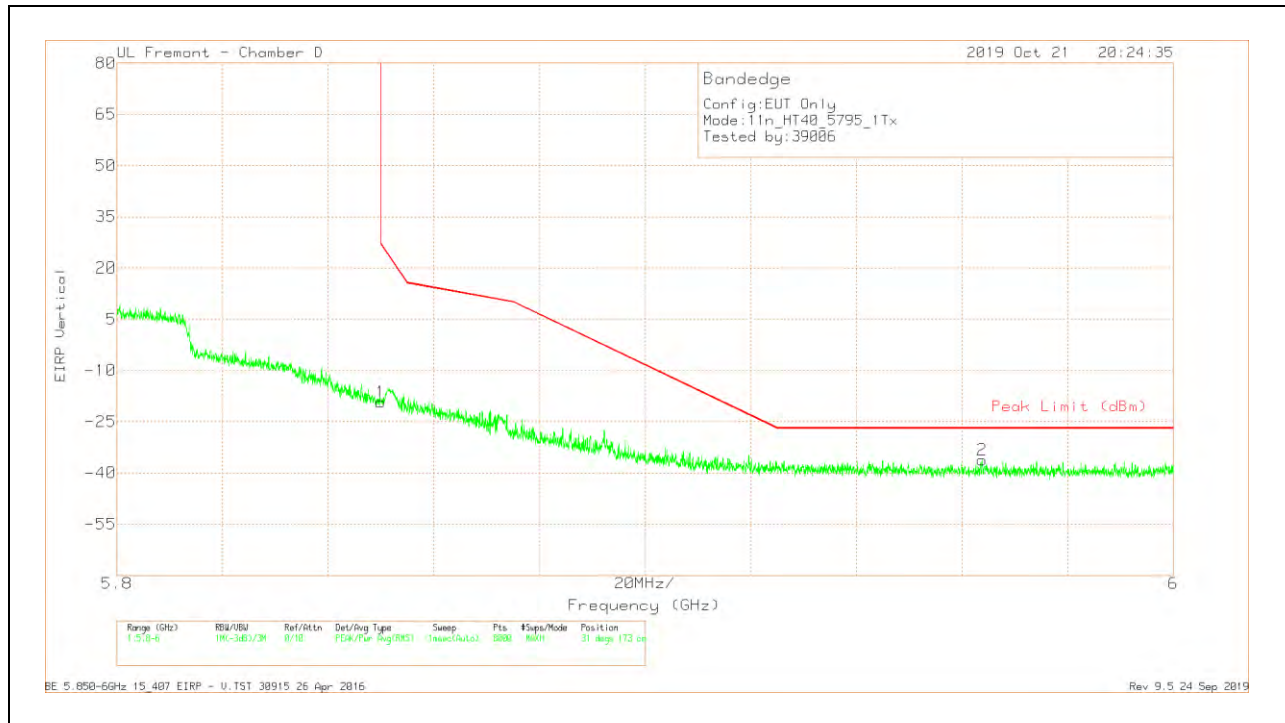


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-48.24	Pk	34.7	-17.5	11.8	0	-19.24	26.99	-46.23	31	173	V
2	5.96379	-65.31	Pk	35	-17.6	11.8	0	-36.11	-27	-9.11	31	173	V

Pk - Peak detector

1TX LAT3 MODE

BANDEGE (LOW CHANNEL)


HORIZONTAL RESULT

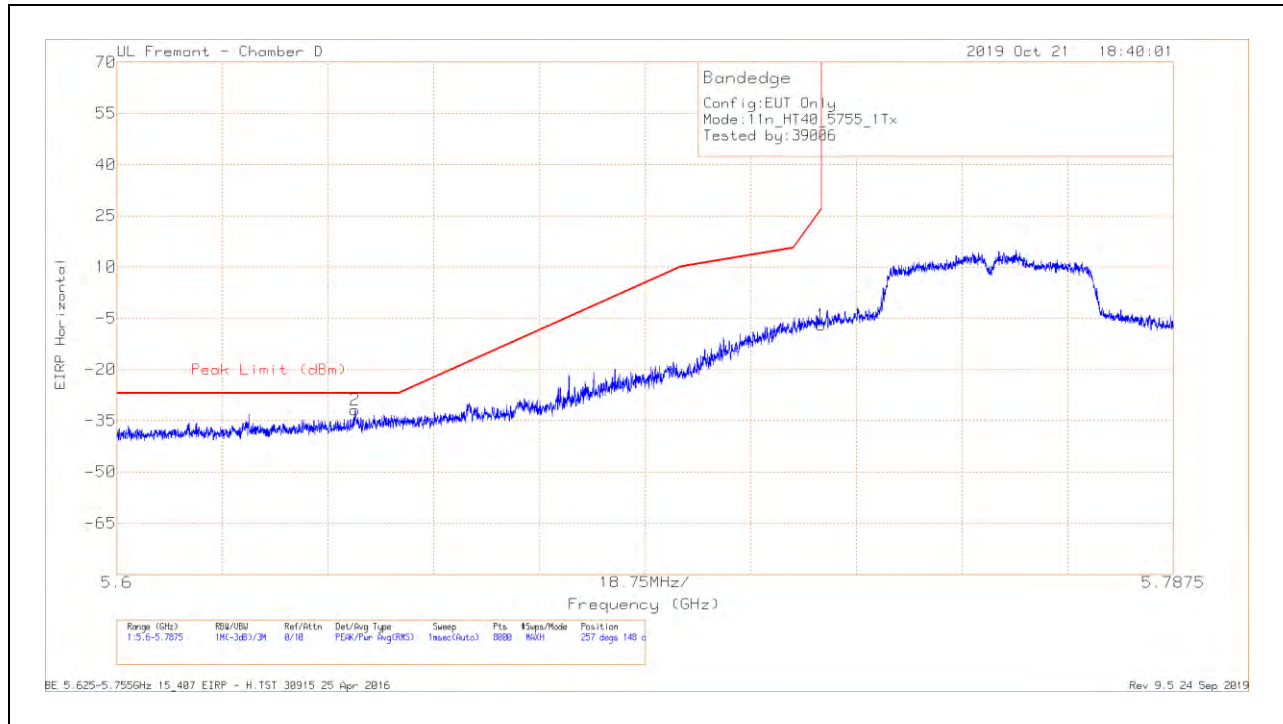

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64229	-60.79	Pk	34.6	-17.5	11.8	0	-31.89	-27	-4.89	257	148	H
1	5.72498	-35.67	Pk	34.6	-17.7	11.8	0	-6.97	26.96	-33.93	257	148	H

Pk - Peak detector

VERTICAL RESULT

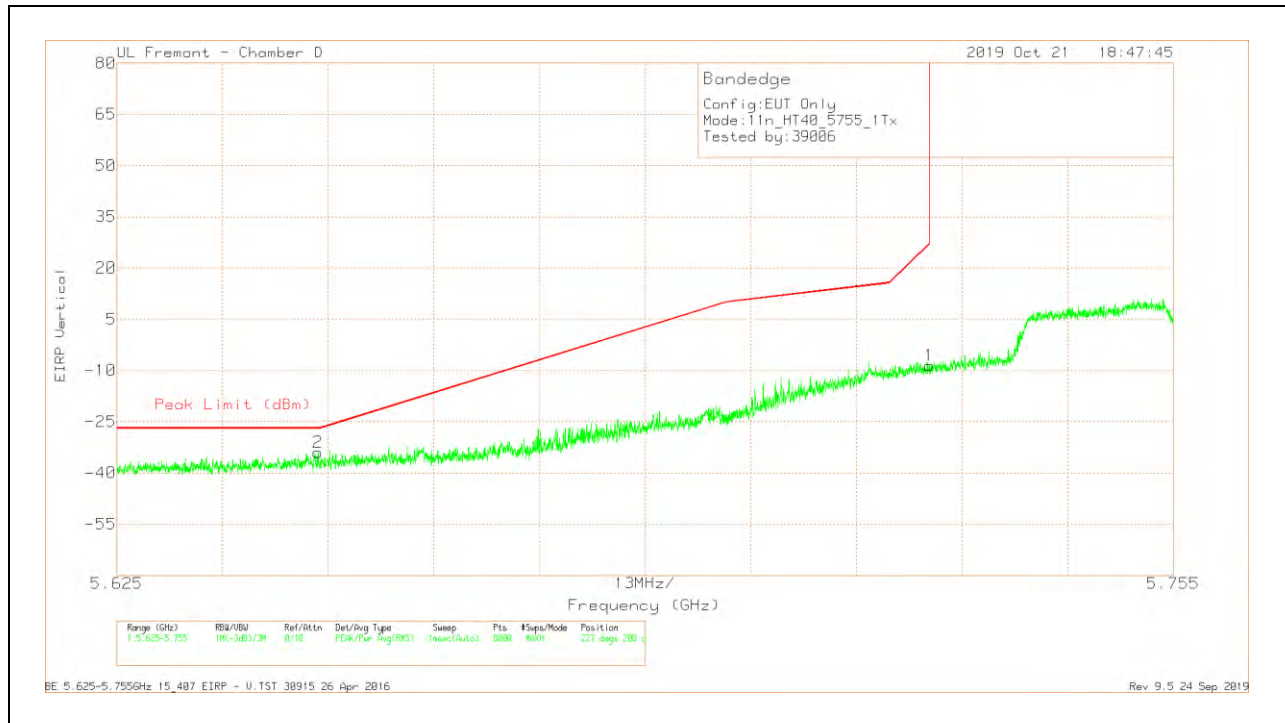


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64977	-62.85	Pk	34.5	-17.4	11.8	0	-33.95	-27	-6.95	227	208	V
1	5.725	-37.21	Pk	34.6	-17.7	11.8	0	-8.51	27	-35.51	227	208	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

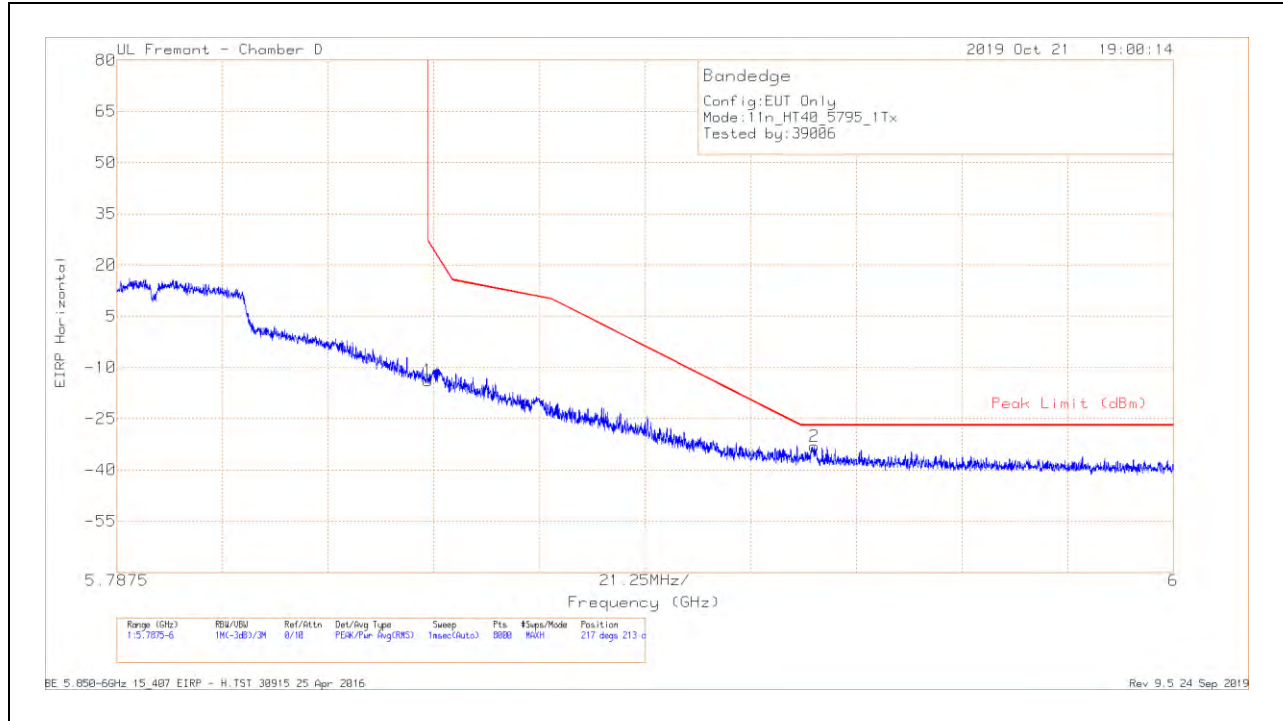

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-42.81	Pk	34.7	-17.5	11.8	0	-13.81	26.98	-40.79	217	213	H
2	5.9278	-62.28	Pk	34.9	-17.4	11.8	0	-32.98	-27	-5.98	217	213	H

Pk - Peak detector

VERTICAL RESULT

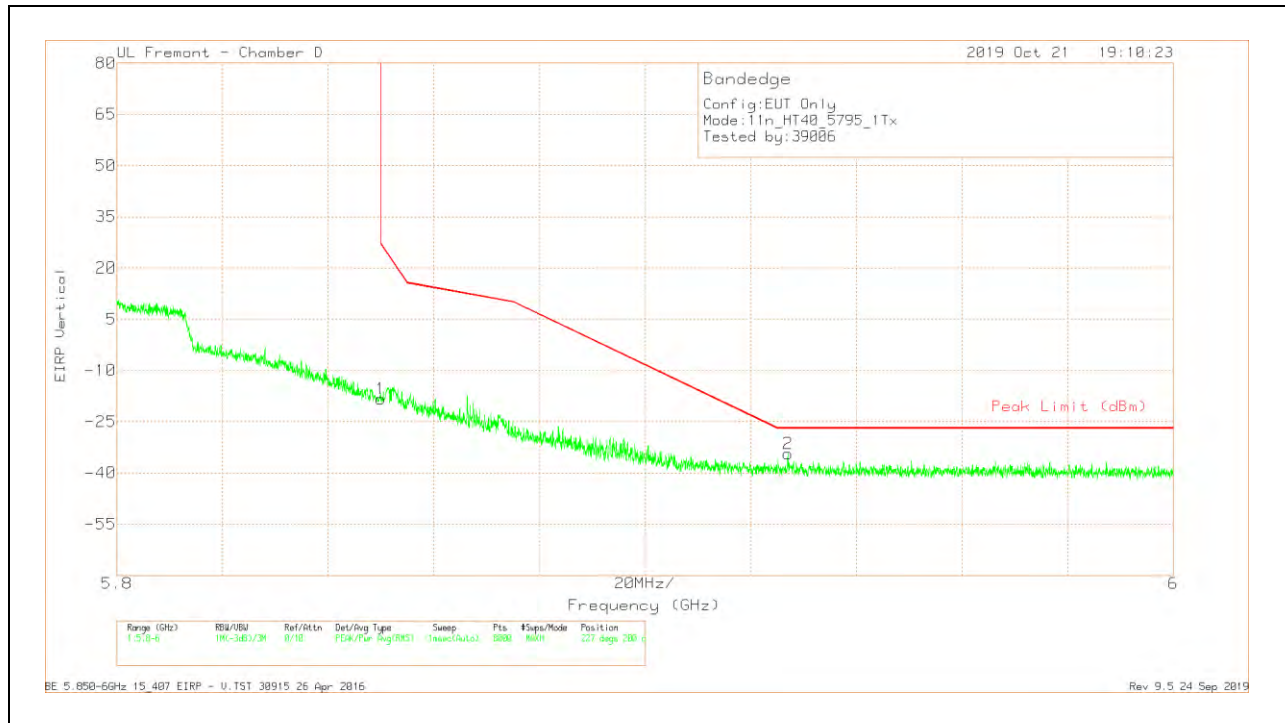


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.34	Pk	34.7	-17.5	11.8	0	-18.34	26.99	-45.33	227	200	V
2	5.92702	-63.64	Pk	34.9	-17.4	11.8	0	-34.34	-27	-7.34	227	200	V

Pk - Peak detector

2TX UAT2 + LAT3 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

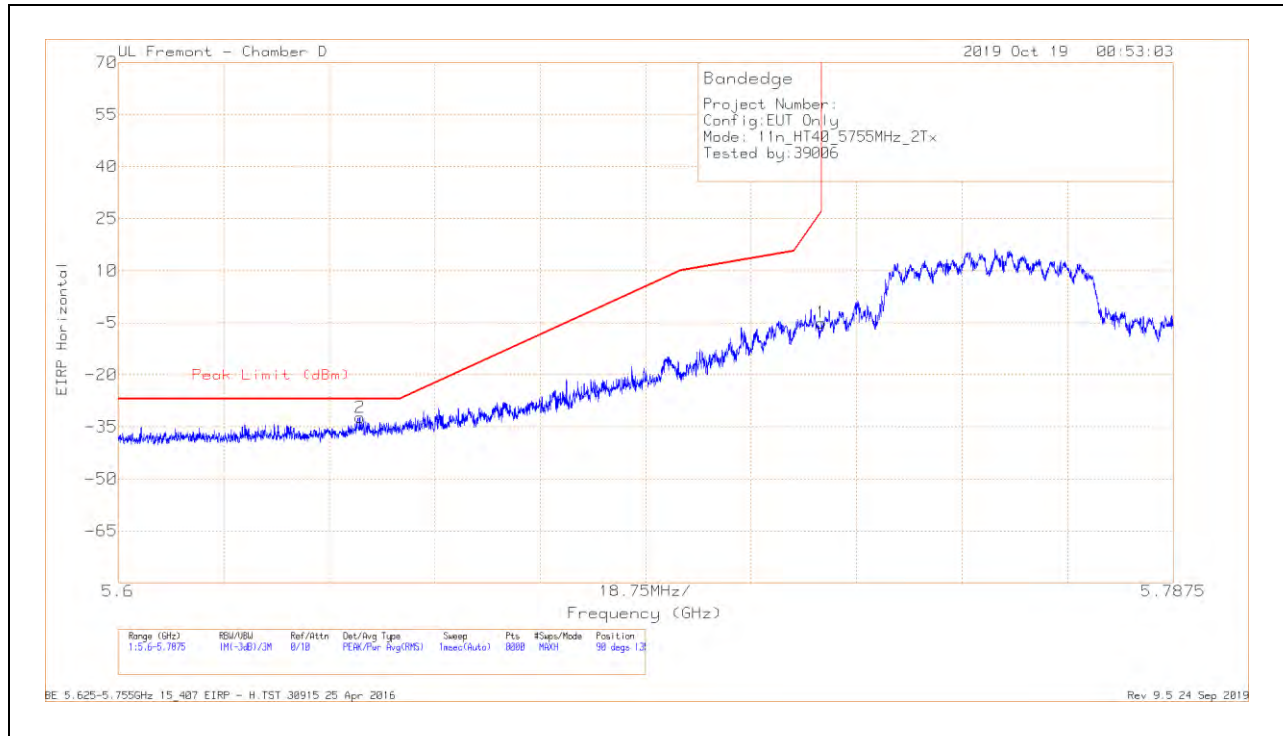

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64297	-61.18	Pk	34.6	-17.5	11.8	0	-32.28	-27	-5.28	90	135	H
1	5.72498	-33.7	Pk	34.6	-17.7	11.8	0	-5	26.96	-31.96	90	135	H

Pk - Peak detector

VERTICAL RESULT

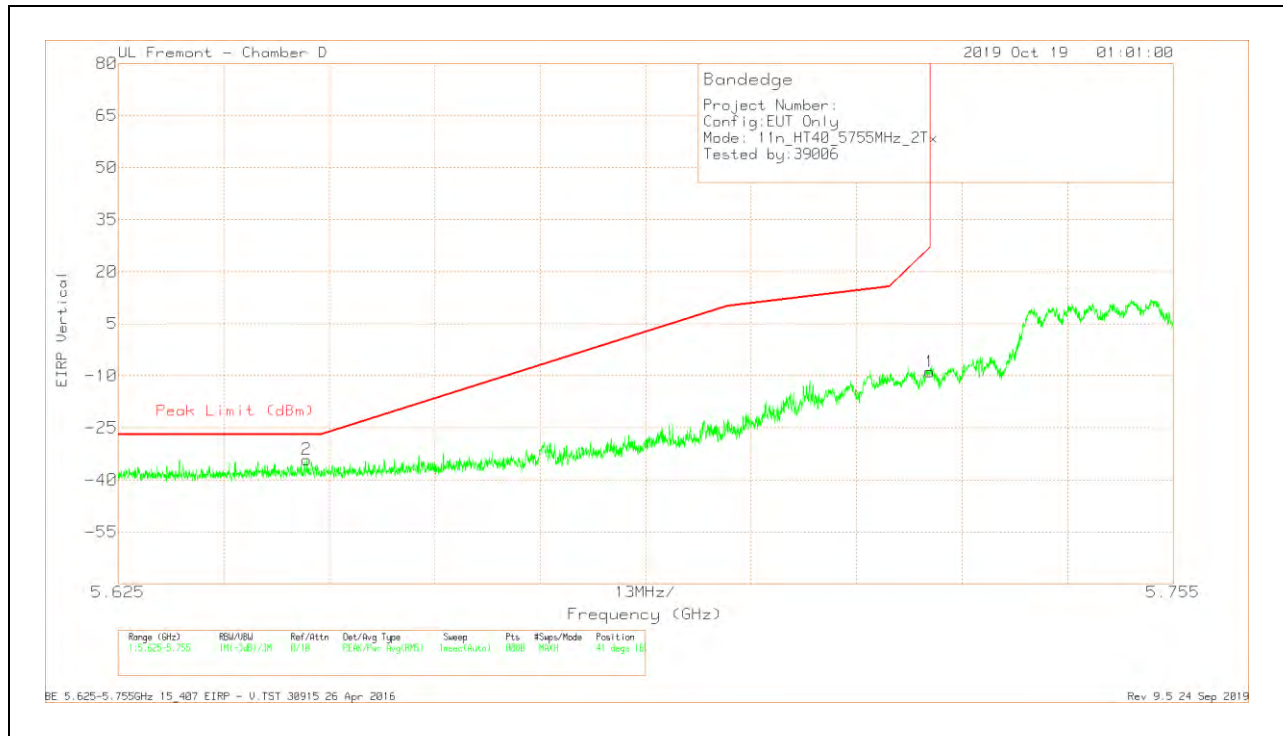


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64826	-63.16	Pk	34.5	-17.3	11.8	-34.16	-27	-7.16	41	165	V
1	5.725	-37.55	Pk	34.6	-17.7	11.8	-8.85	27	-35.85	41	165	V

Pk - Peak detector

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

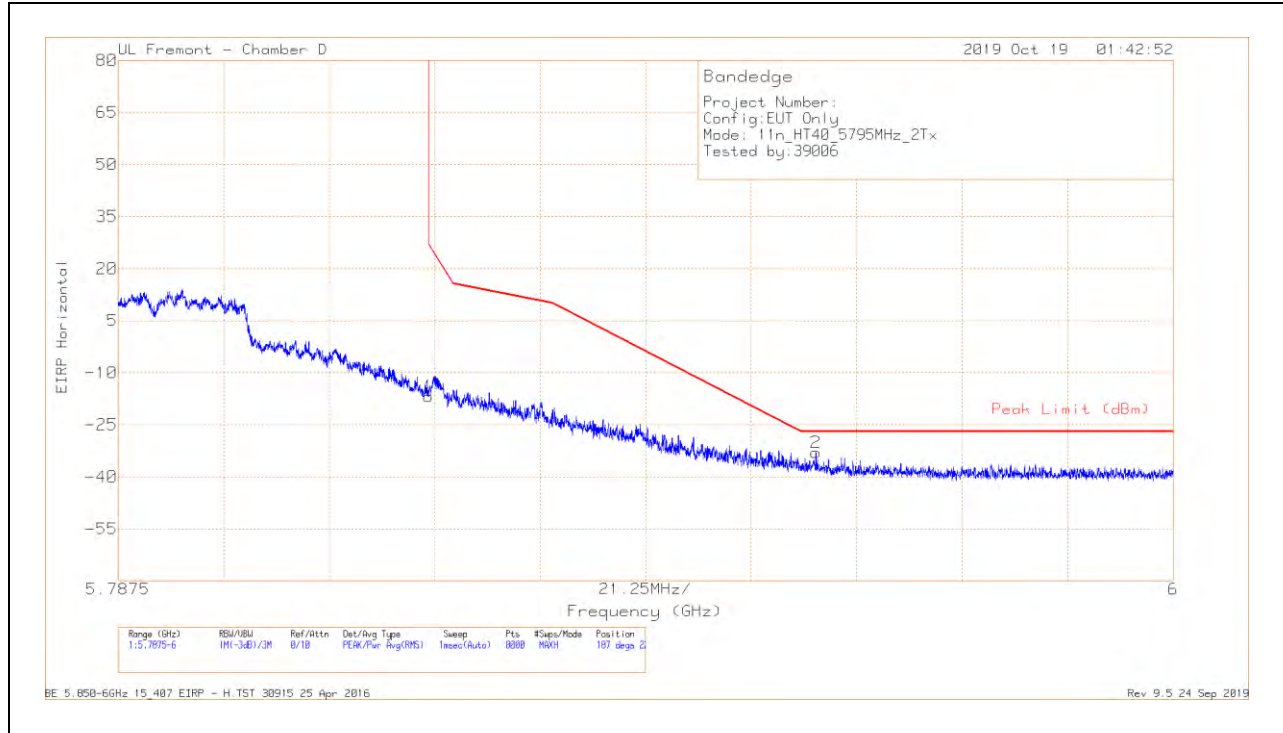

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-45.89	Pk	34.7	-17.5	11.8	0	-16.89	26.98	-43.87	187	222	H
2	5.92803	-62.3	Pk	34.9	-17.4	11.8	0	-33	-27	-6	187	222	H

Pk - Peak detector

VERTICAL RESULT





Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-49.27	Pk	34.7	-17.5	11.8	0	-20.27	26.99	-47.26	326	151	V
2	5.95159	-64	Pk	34.9	-17.6	11.8	0	-34.9	-27	-7.9	326	151	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

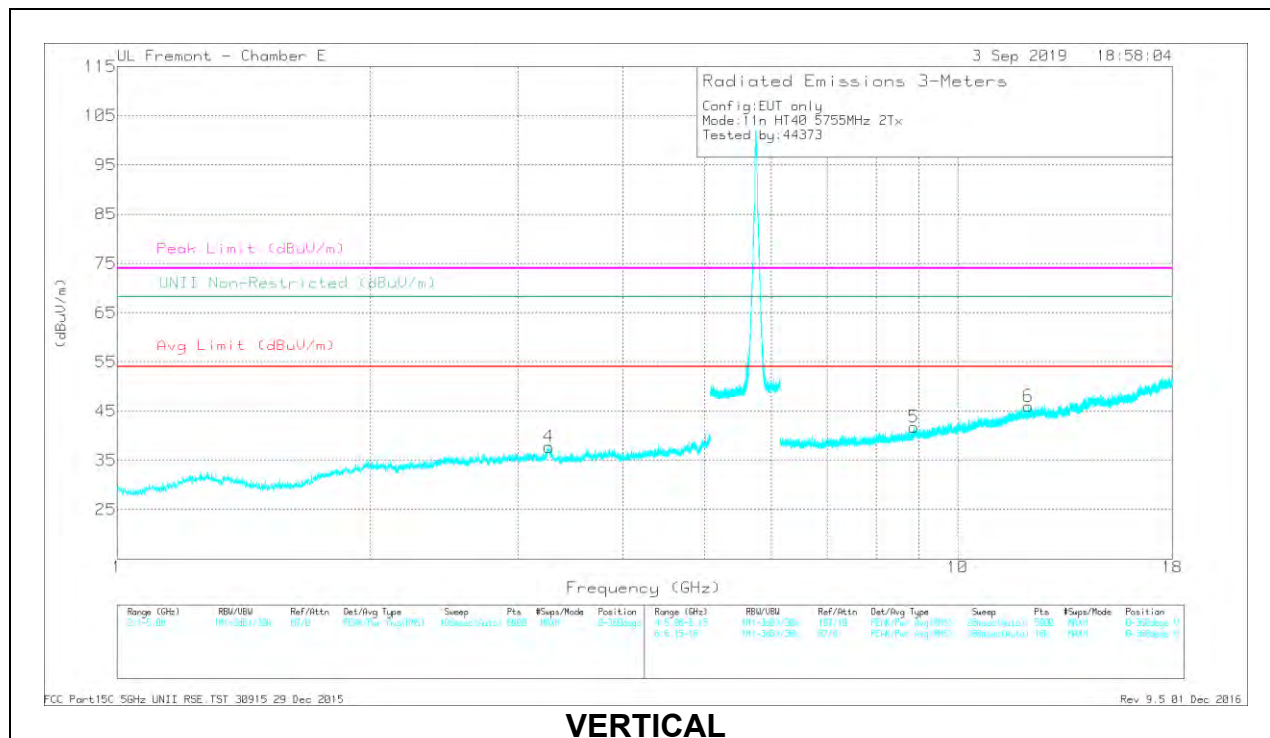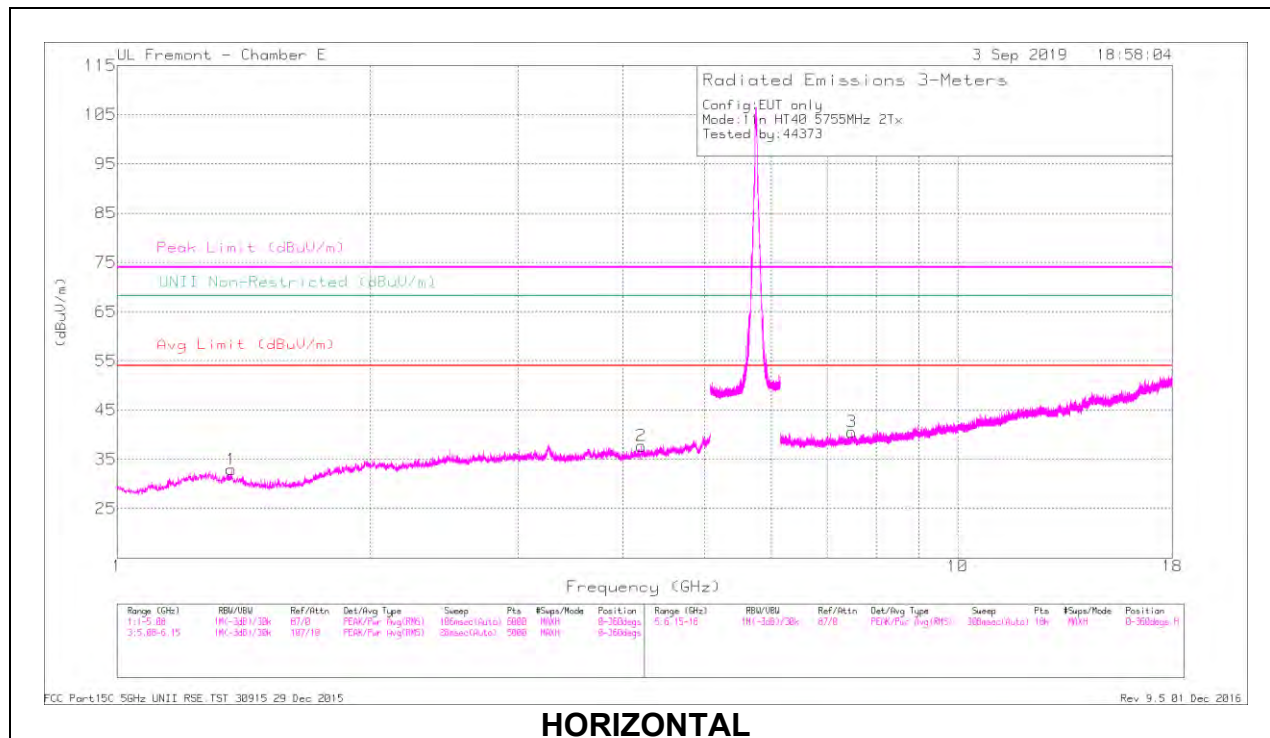

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.366	45.22	PK-U	29.8	-35.6	0	39.42	-	-	74	-34.58	-	-	131	372	H
	* 1.366	33.45	ADR	29.8	-35.6	0.09	27.74	54	-26.26	-	-	-	-	131	372	H
2	* 4.203	41.99	PK-U	33.4	-31.9	0	43.49	-	-	74	-30.51	-	-	99	114	H
	* 4.204	30.71	ADR	33.4	-31.9	0.09	32.30	54	-21.70	-	-	-	-	99	114	H
4	* 3.261	44.86	PK-U	35.1	-34.5	0	45.46	-	-	74	-28.54	-	-	155	149	V
	* 3.261	33.45	ADR	35.1	-34.5	0.09	34.14	54	-19.86	-	-	-	-	155	149	V
3	* 7.48	38.83	PK-U	35.7	-27.7	0	46.83	-	-	74	-27.17	-	-	155	104	H
	* 7.481	27.56	ADR	35.7	-27.7	0.09	35.65	54	-18.35	-	-	-	-	155	104	H
6	* 12.134	36.23	PK-U	39	-22.7	0	52.53	-	-	74	-21.47	-	-	95	132	V
	* 12.133	24.68	ADR	39	-22.7	0.09	41.07	54	-12.93	-	-	-	-	95	132	V
5	8.874	37.65	PK-U	36.1	-25.5	0	48.25	-	-	-	-	68.2	-19.95	206	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

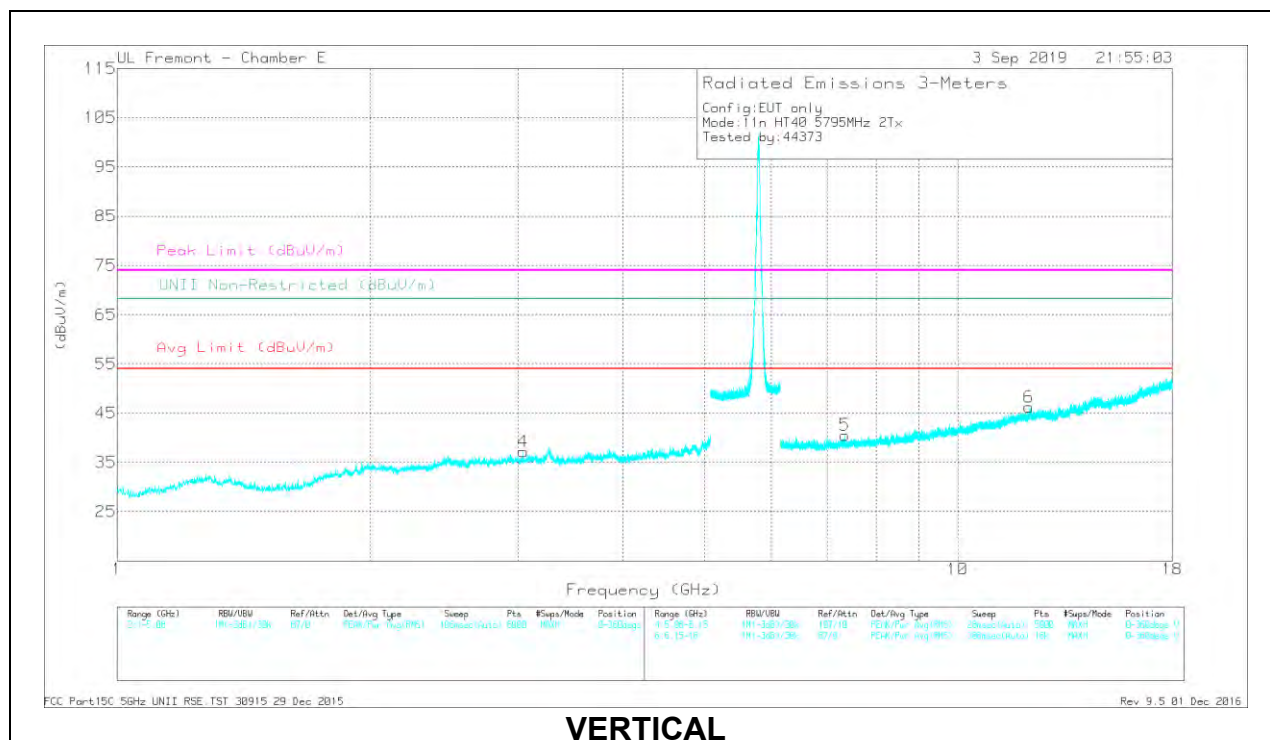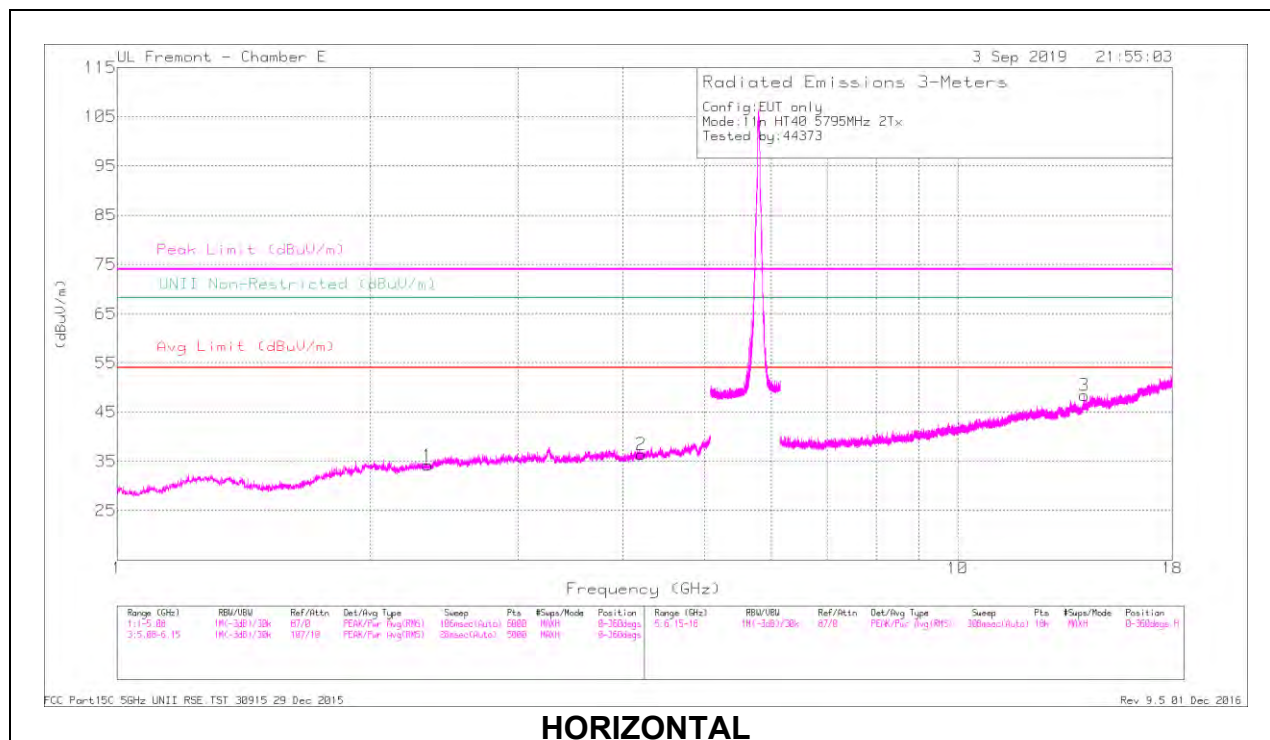

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.343	45.5	PK-U	31.9	-35.4	0	42	-	-	74	-32	-	-	276	172	H
	* 2.344	33.61	ADR	31.9	-35.4	0.09	30.20	54	-23.80	-	-	-	-	276	172	H
2	* 4.202	42.8	PK-U	33.4	-31.9	0	44.3	-	-	74	-29.7	-	-	249	162	H
	* 4.205	30.75	ADR	33.5	-31.9	0.09	32.44	54	-21.56	-	-	-	-	249	162	H
5	* 7.337	39.25	PK-U	35.7	-27.9	0	47.05	-	-	74	-26.95	-	-	166	121	V
	* 7.337	27.34	ADR	35.7	-27.9	0.09	35.23	54	-18.77	-	-	-	-	166	121	V
6	* 12.156	36.32	PK-U	39	-22.7	0	52.62	-	-	74	-21.38	-	-	217	379	V
	* 12.156	24.69	ADR	39	-22.7	0.09	41.08	54	-12.92	-	-	-	-	217	379	V
4	3.044	44.71	PK-U	33.2	-34.7	0	43.21	-	-	-	-	68.2	-24.99	241	157	V
3	14.143	35.46	PK-U	38.9	-20.5	0	53.86	-	-	-	-	68.2	-14.34	127	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.21. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX UAT2 MODE

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

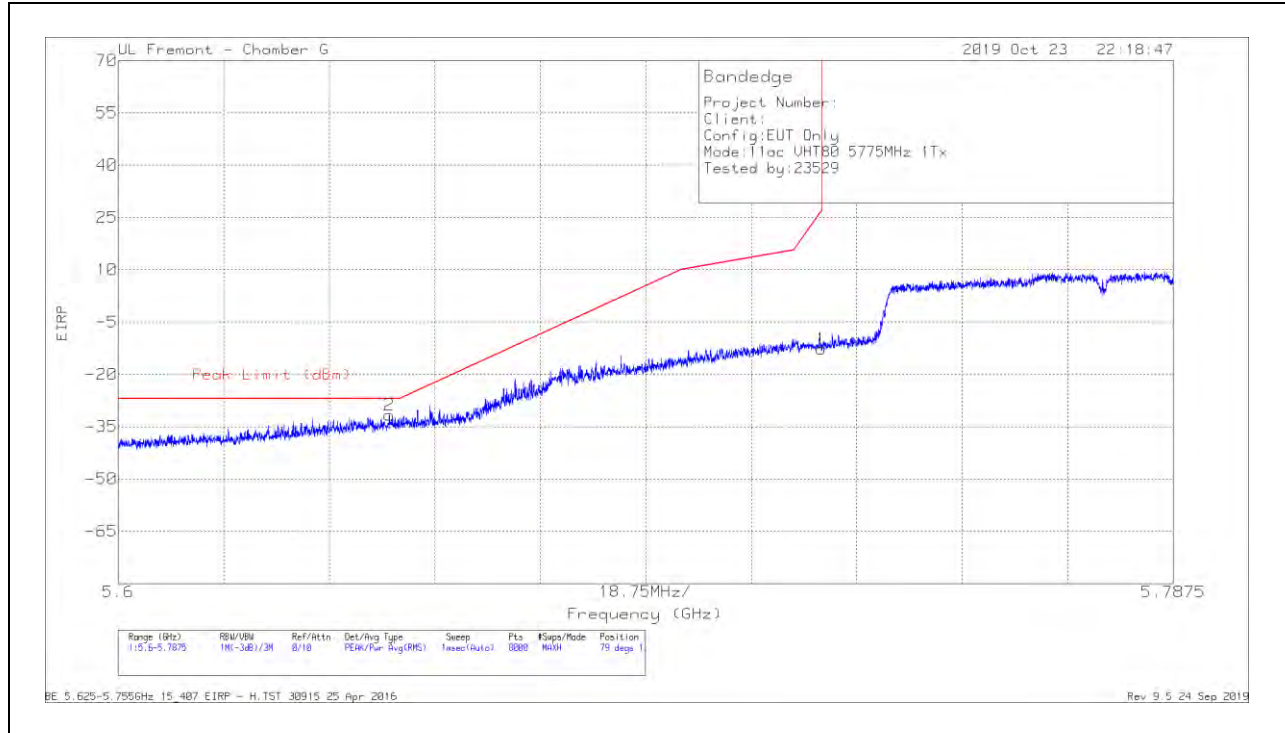

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64817	-58.36	Pk	35.1	-20.2	11.8	0	-31.66	-27	-4.66	79	135	H
1	5.72498	-39.63	Pk	35.1	-20	11.8	0	-12.73	26.96	-39.69	79	135	H

Pk - Peak detector

UL Fremont - Chamber G

2019 Oct 23 22:27:31

Bandedge
Project Number:
Client:
Config: EUT Only
Mode: 11oc UHT80 5775MHz 1Tx
Tested by: 23529

Peak Limit (dBm)

EIRP

Frequency (GHz)

Range (Hz)	RBW/MBW	Ref/Att	Det/Avg Type	Sweep	PLs	#Sps/Mode	Position
11.625-5.755	1MHz/3dB/20	0dB	Peak/Power Avg(RMS)	MaxHold	0dB	1000	1/3:avg

BE 5.625-5.755GHz 15.487 EIRP - U.TST 30915 26 Apr 2016

Rev 9.5 24 Sep 2019


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64614	-61.37	Pk	35.1	-20.2	11.8	0	-34.67	-27	-7.67	113	134	V
1	5.725	-43.78	Pk	35.1	-20	11.8	0	-16.88	27	-43.88	113	134	V

Page 377 of 498

UL VERIFICATION SERVICES INC.
47173 Benicia Street, Fremont, CA 94538; USA TEL:(510) 319-4000 FAX:(510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

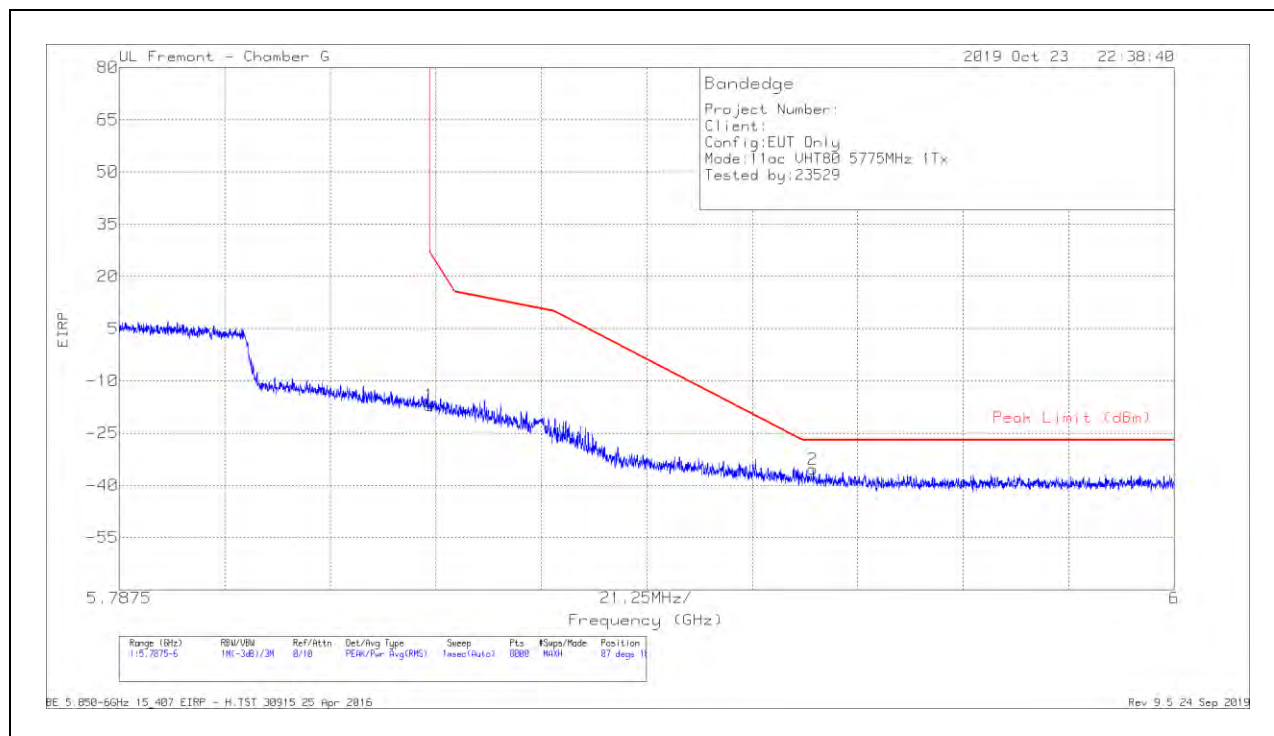

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-44.35	Pk	35.4	-19.9	11.8	0	-17.05	26.98	-44.03	87	187	H
2	5.92724	-62.51	Pk	35.6	-20.3	11.8	0	-35.41	-27	-8.41	87	187	H

Pk - Peak detector

VERTICAL RESULT

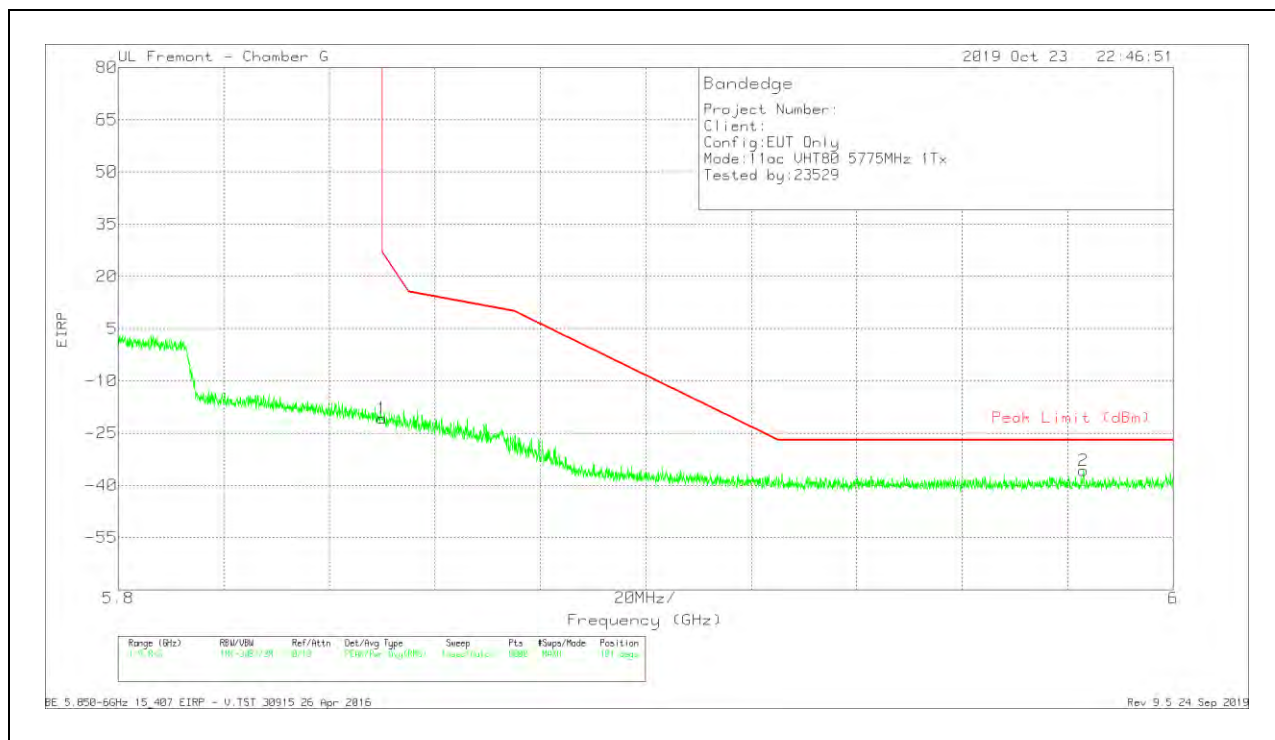


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-48.1	Pk	35.4	-19.9	11.8	-20.8	26.99	-47.79	101	119	V
2	5.98297	-63.25	Pk	35.7	-20	11.8	-35.75	-27	-8.75	101	119	V

Pk - Peak detector

1TX LAT3 MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

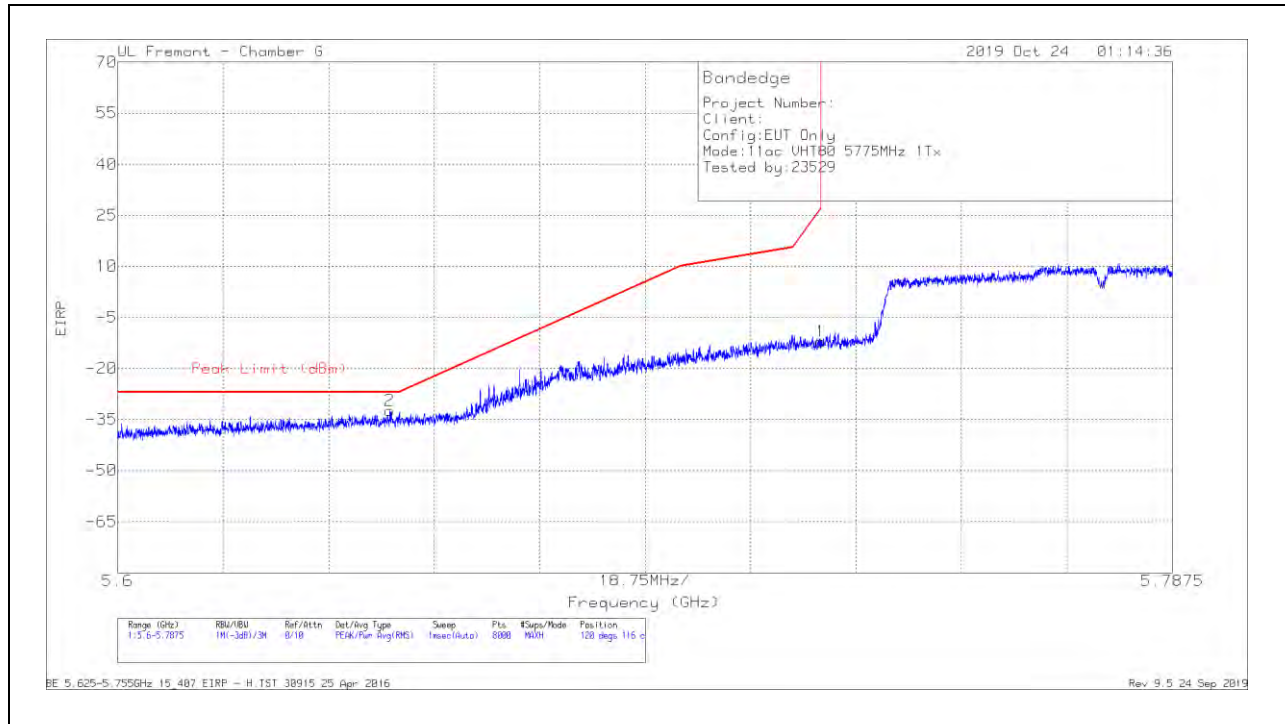

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64833	-59.1	Pk	35.1	-20.2	11.8	0	-32.4	-27	-5.4	120	116	H
1	5.72498	-38.98	Pk	35.1	-20	11.8	0	-12.08	26.96	-39.04	120	116	H

Pk - Peak detector

VERTICAL RESULT

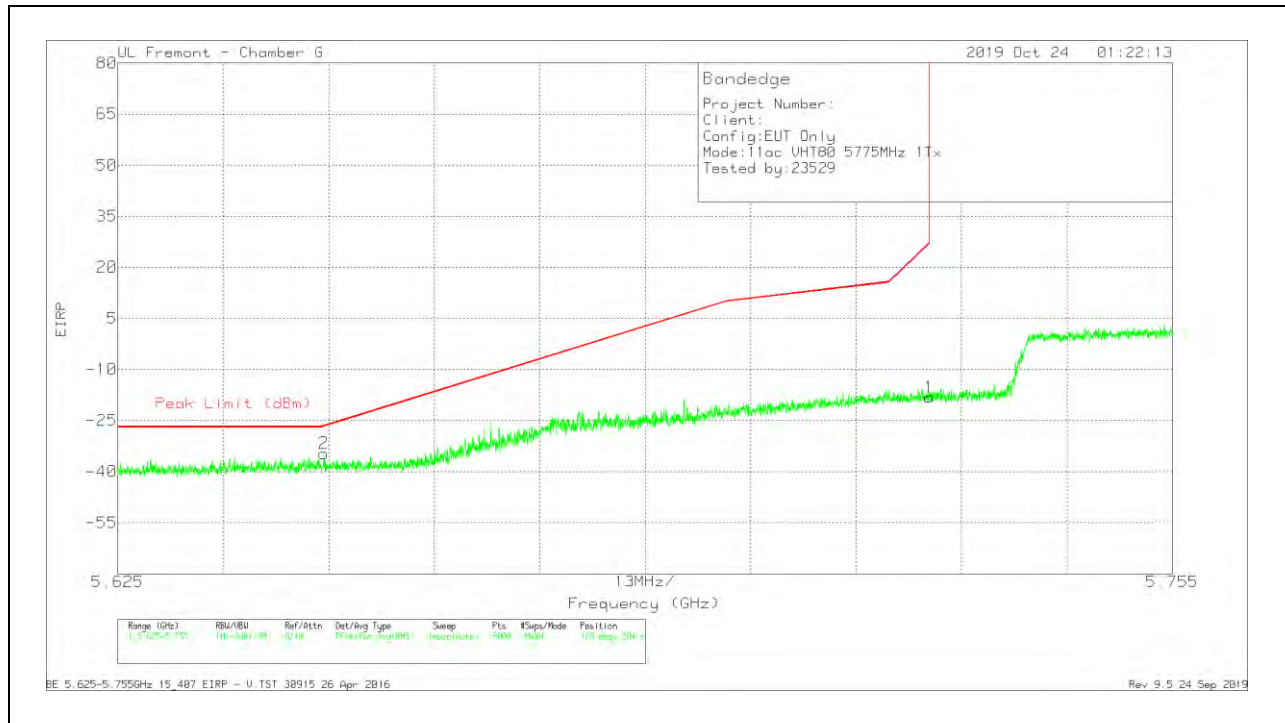


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6504	-61.23	Pk	35	-20.2	11.8	0	-34.63	-26.7	-7.93	128	204	V
1	5.725	-45.09	Pk	35.1	-20	11.8	0	-18.19	27	-45.19	128	204	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

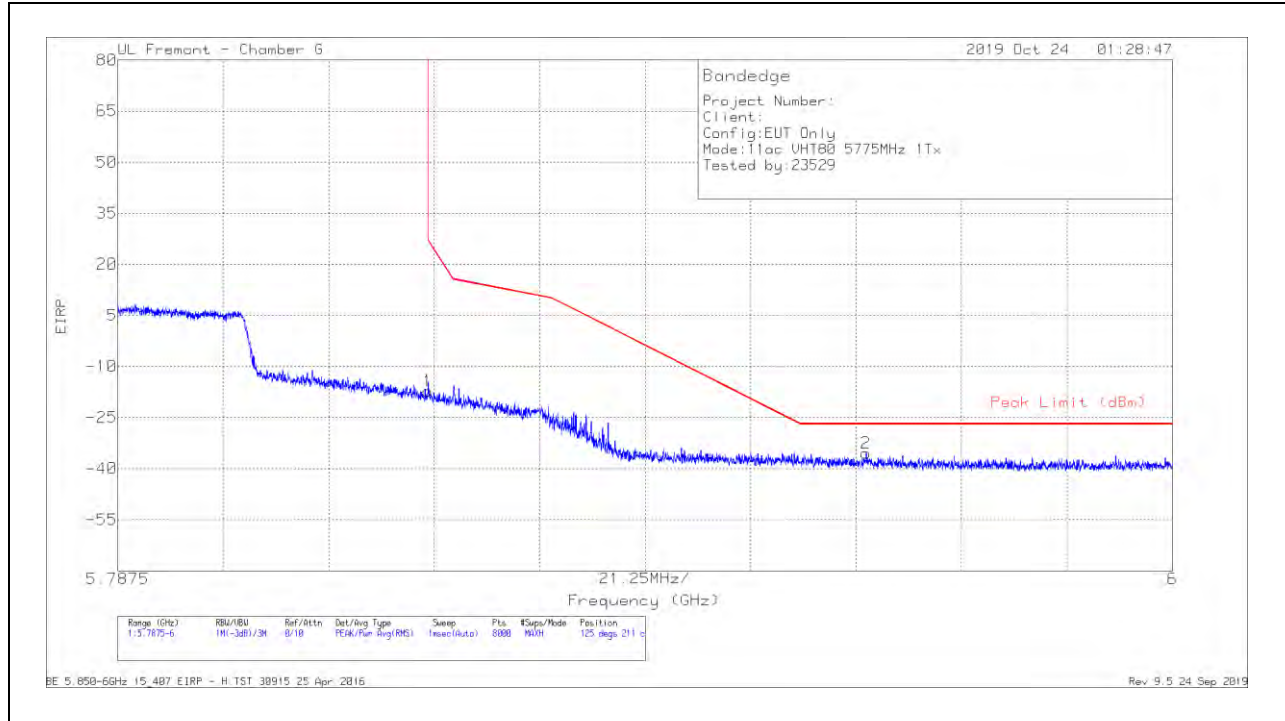

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-44.53	Pk	35.4	-19.9	11.8	0	-17.23	26.98	-44.21	125	211	H
2	5.93829	-62.61	Pk	35.6	-20.2	11.8	0	-35.41	-27	-8.41	125	211	H

Pk - Peak detector

VERTICAL RESULT

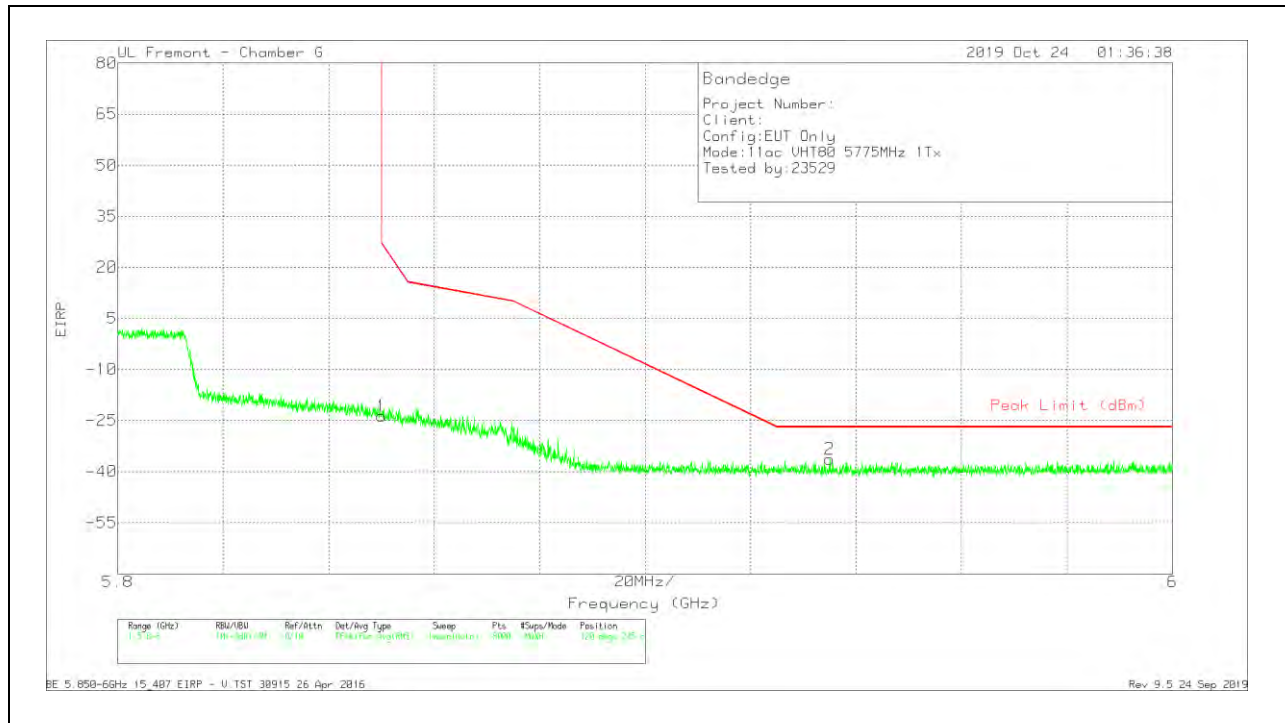


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-50.92	Pk	35.4	-19.9	11.8	0	-23.62	26.99	-50.61	120	245	V
2	5.93504	-63.49	Pk	35.6	-20.2	11.8	0	-36.29	-27	-9.29	120	245	V

Pk - Peak detector

2TX UAT2 + LAT3 CDD MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

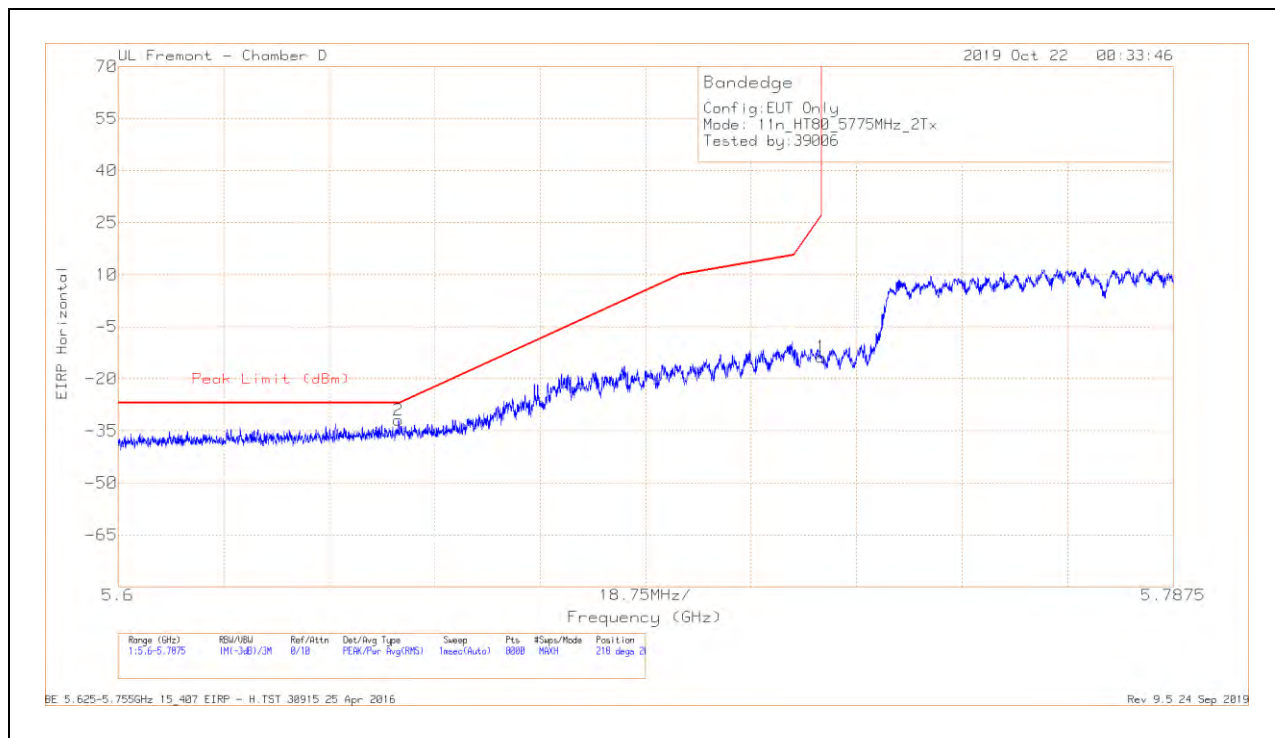

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64986	-60.85	Pk	34.5	-17.4	11.8	0	-31.95	-27	-4.95	218	205	H
1	5.72498	-42.43	Pk	34.6	-17.7	11.8	0	-13.73	26.96	-40.69	218	205	H

Pk - Peak detector

VERTICAL RESULT

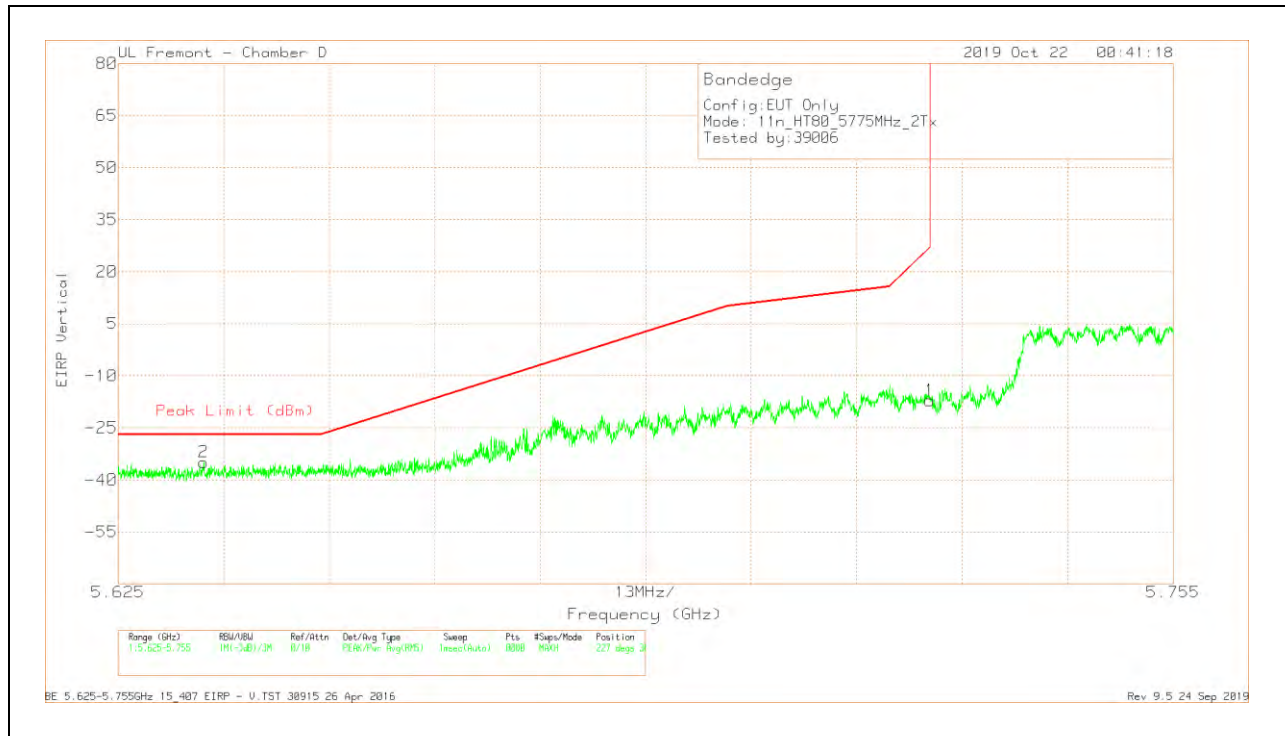


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63556	-63.69	Pk	34.5	-17.5	11.8	0	-34.89	-27	-7.89	227	387	V
1	5.725	-45.79	Pk	34.6	-17.7	11.8	0	-17.09	27	-44.09	227	387	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

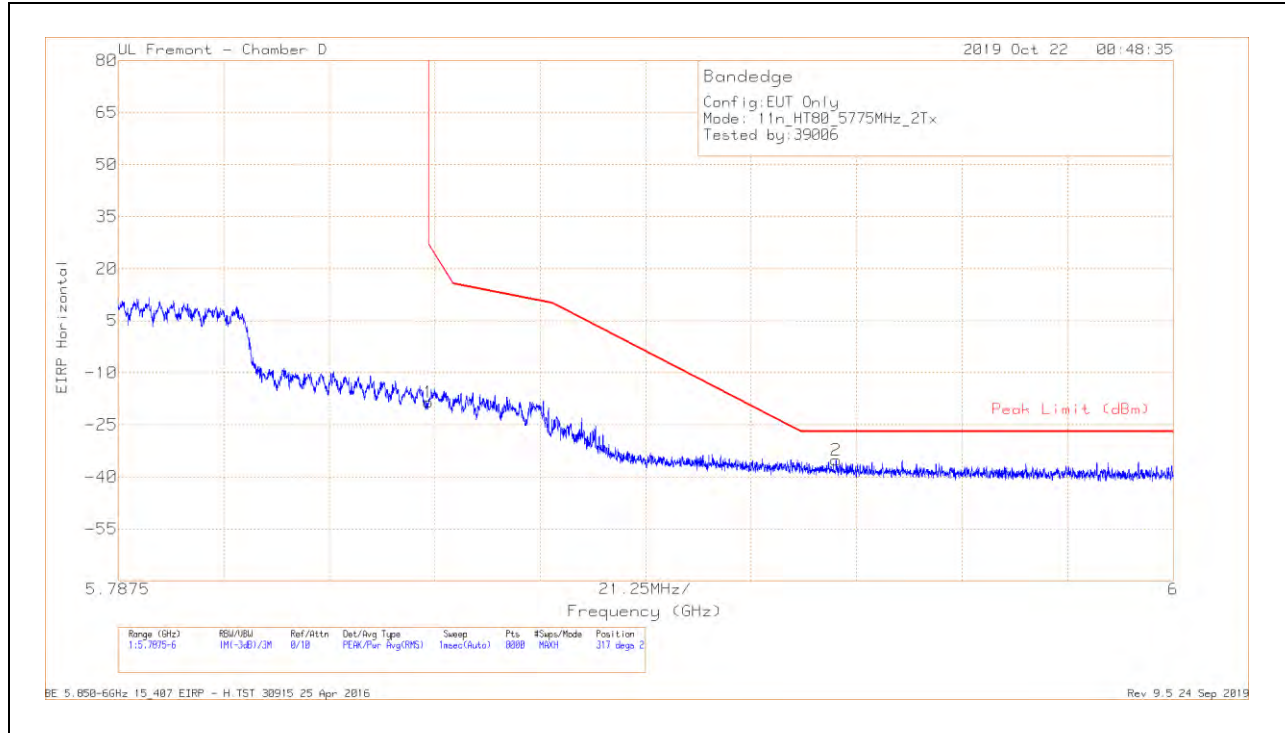

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.47	Pk	34.7	-17.5	11.8	0	-18.47	26.98	-45.45	317	214	H
2	5.9321	-64.38	Pk	34.9	-17.5	11.8	0	-35.18	-27	-8.18	317	214	H

Pk - Peak detector

VERTICAL RESULT


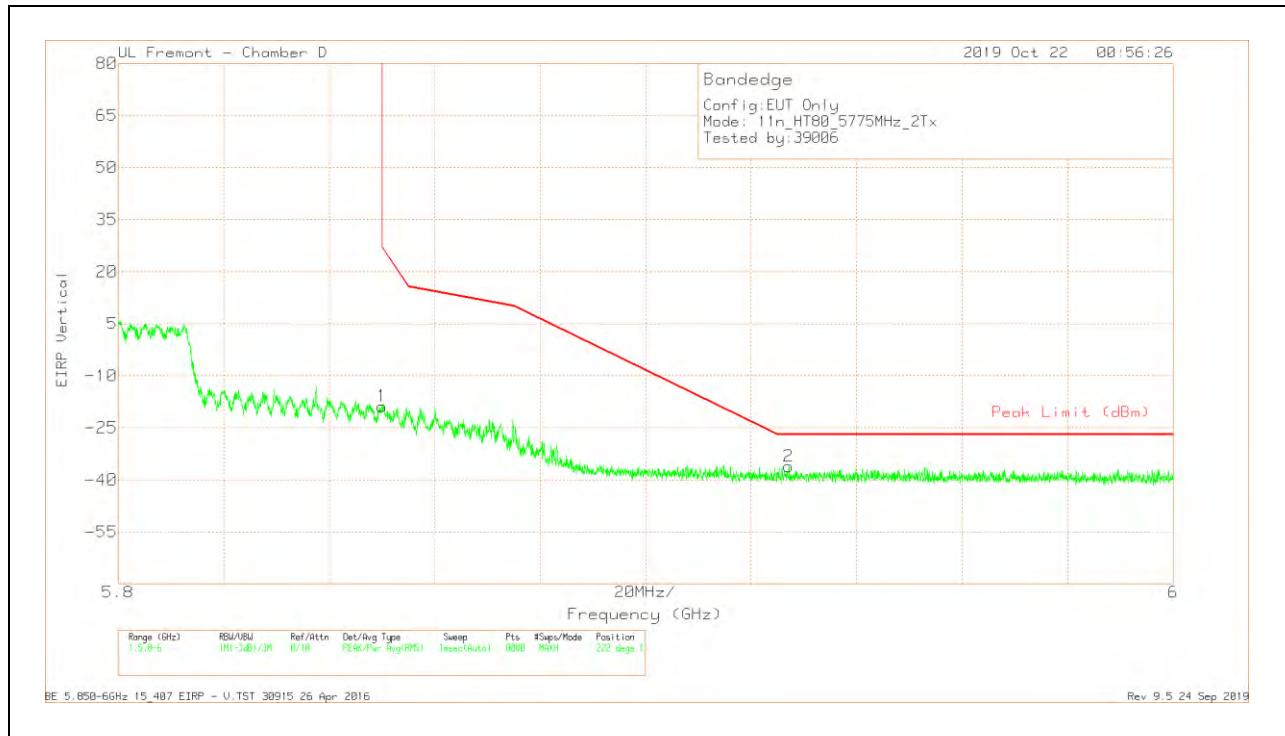


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.77	Pk	34.7	-17.5	11.8	0	-18.77	26.99	-45.76	222	171	V
2	5.92714	-65.41	Pk	34.9	-17.4	11.8	0	-36.11	-27	-9.11	222	171	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

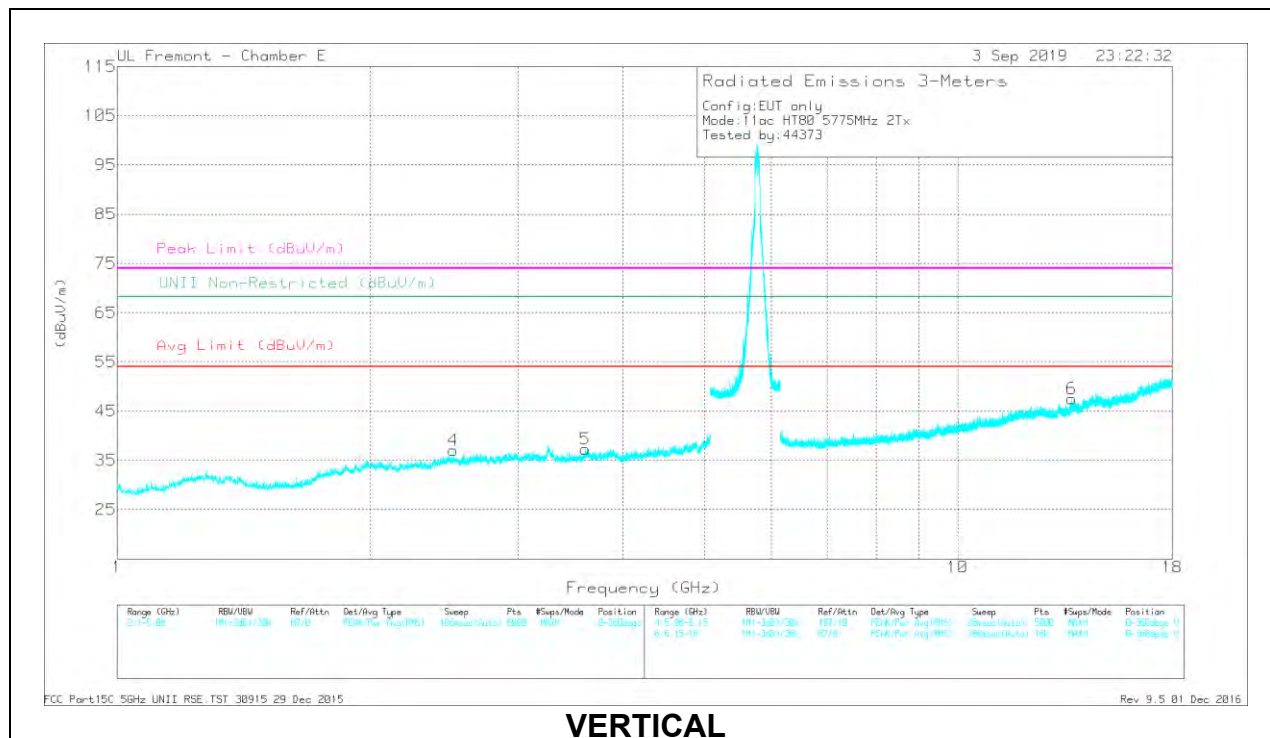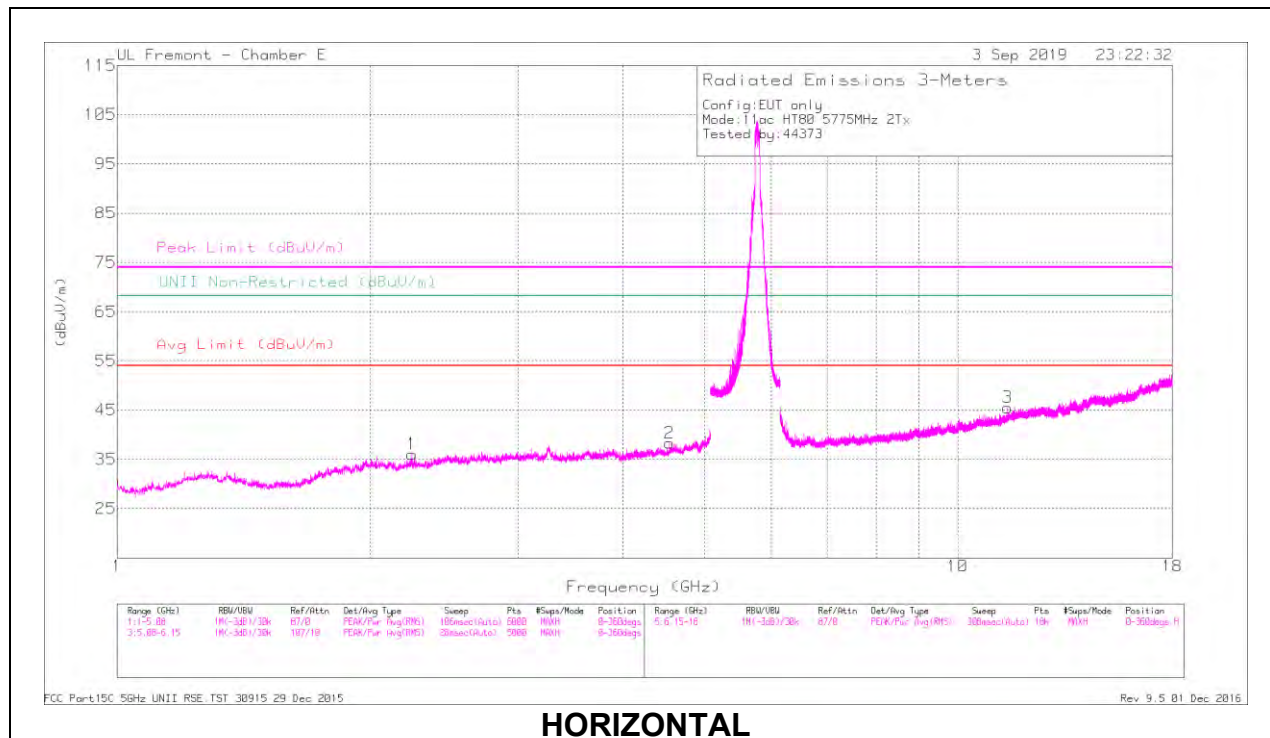

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.245	45.75	PK-U	31.9	-35.6	0	42.05	-	-	74	-31.95	-	-	123	186	H
	* 2.244	33.62	ADR	31.9	-35.6	0.2	30.12	54	-23.88	-	-	-	-	123	186	H
2	* 4.545	42.09	PK-U	34.1	-31.5	0	44.69	-	-	74	-29.31	-	-	58	367	H
	* 4.546	30.57	ADR	34.1	-31.5	0.2	33.37	54	-20.63	-	-	-	-	58	367	H
5	* 3.607	43.54	PK-U	33.2	-33.7	0	43.04	-	-	74	-30.96	-	-	108	173	V
	* 3.607	31.98	ADR	33.2	-33.7	0.2	31.68	54	-22.32	-	-	-	-	108	173	V
3	* 11.463	36.82	PK-U	38.4	-23.6	0	51.62	-	-	74	-22.38	-	-	341	245	H
	* 11.464	24.62	ADR	38.4	-23.6	0.2	39.62	54	-14.38	-	-	-	-	340	245	H
4	2.511	45.54	PK-U	32.9	-35.5	0	42.94	-	-	-	-	68.2	-25.26	119	348	V
6	13.67	36.48	PK-U	38.6	-21.8	0	53.28	-	-	-	-	68.2	-14.92	241	147	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.22. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8 GHz BAND

1TX UAT2 MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

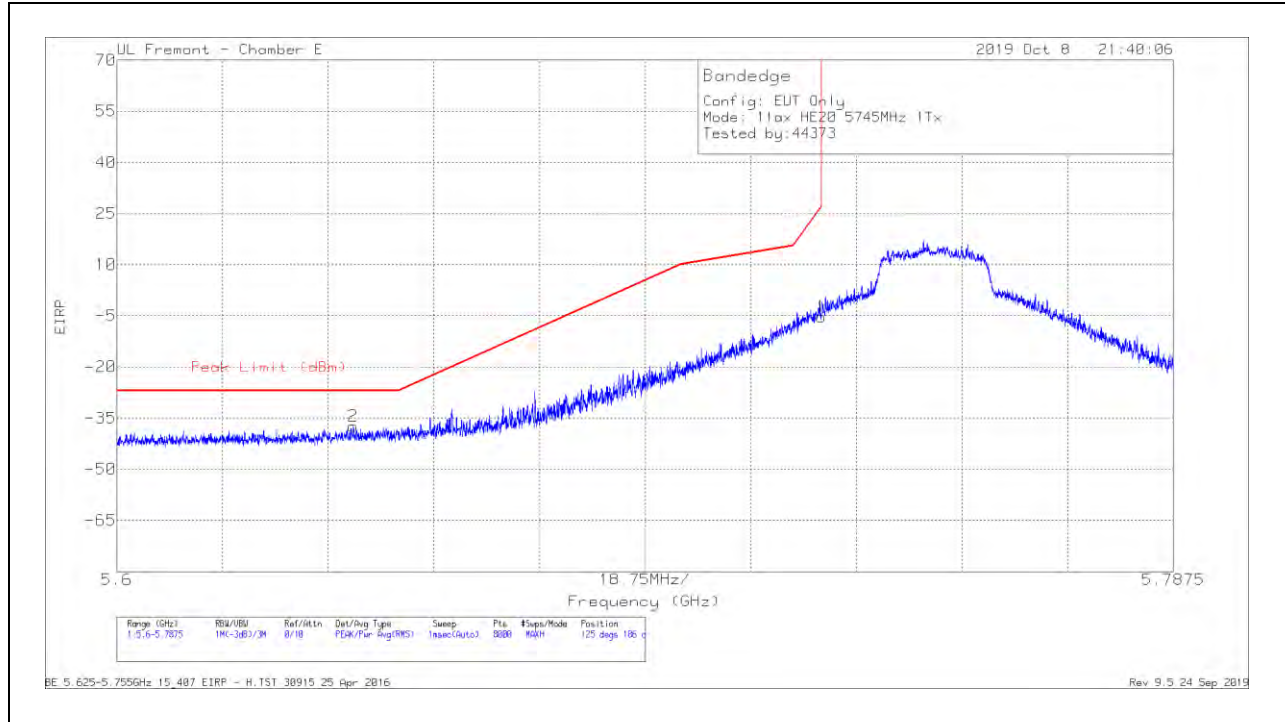

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64196	-62.61	Pk	34.8	-21.3	11.8	-37.31	-27	-10.31	125	186	H
1	5.72498	-31.01	Pk	34.8	-20.9	11.8	-5.31	26.96	-32.27	125	186	H

Pk - Peak detector

VERTICAL RESULT

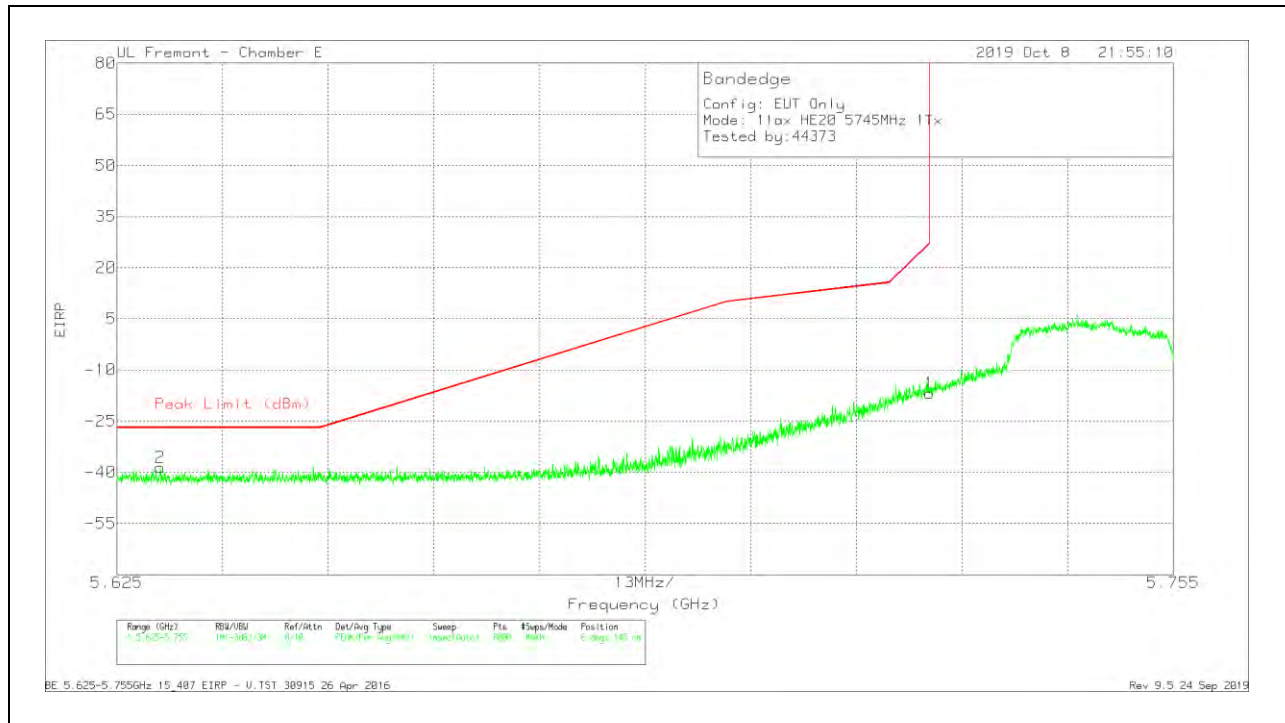


	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63035	-63.83	Pk	34.8	-21.3	11.8	-38.53	-27	-11.53	6	145	V
1	5.725	-42.63	Pk	34.8	-20.9	11.8	-16.93	27	-43.93	6	145	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

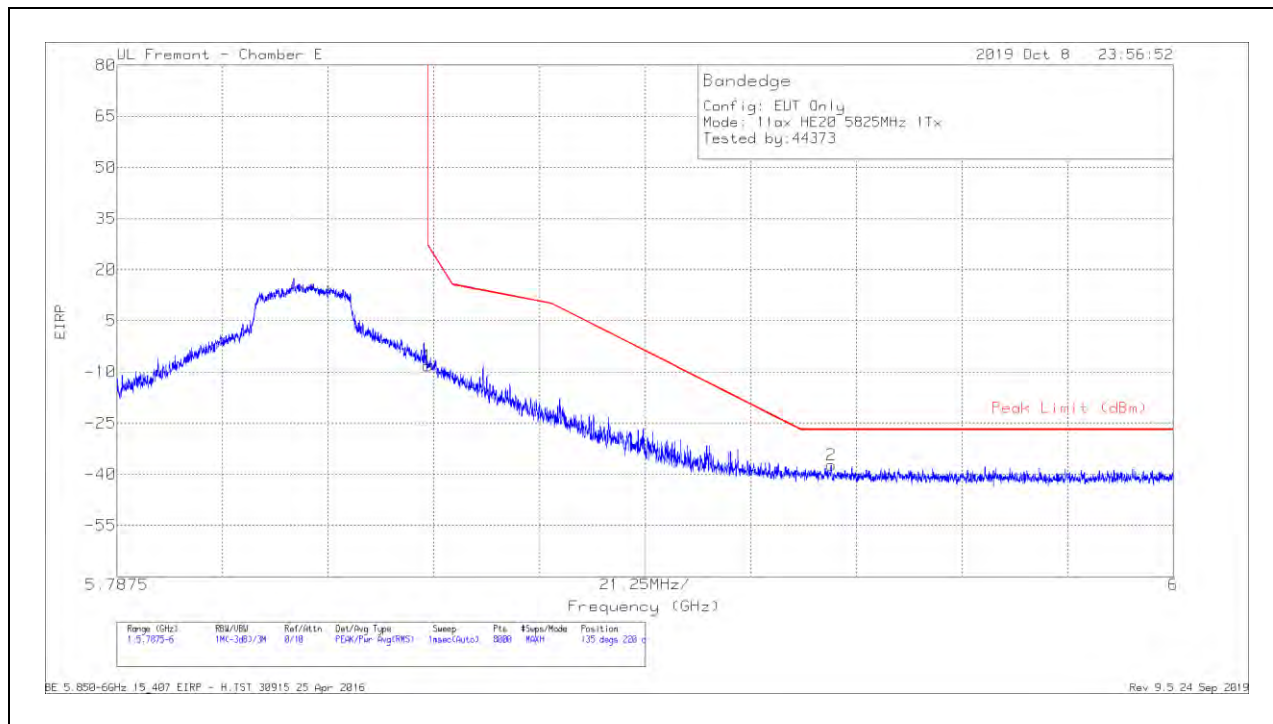

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-34.56	Pk	34.9	-20.3	11.8	-8.16	26.98	-35.14	135	220	H
2	5.93117	-63.64	Pk	35.1	-20.5	11.8	-37.24	-27	-10.24	135	220	H

Pk - Peak detector

VERTICAL RESULT

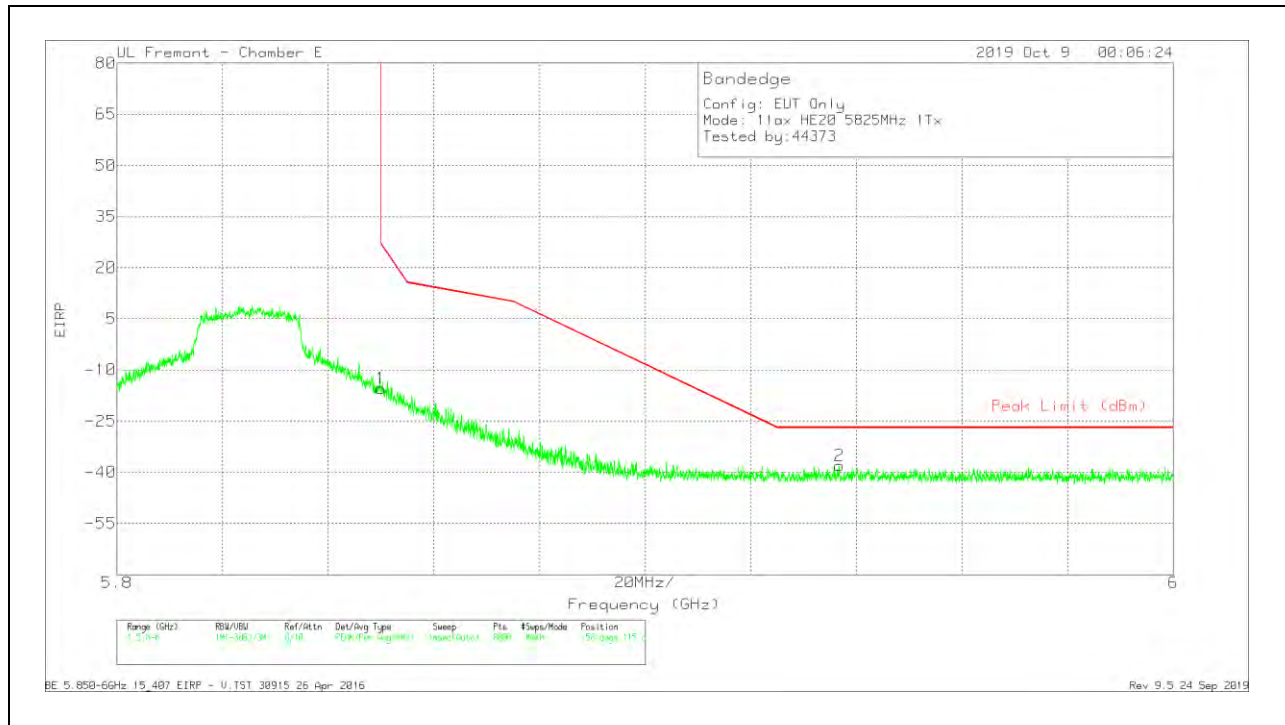


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-41.74	Pk	34.9	-20.3	11.8	-15.34	26.99	-42.33	158	115	V
2	5.93679	-64.41	Pk	35.1	-20.5	11.8	-38.01	-27	-11.01	158	115	V

Pk - Peak detector

1TX UAT2 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

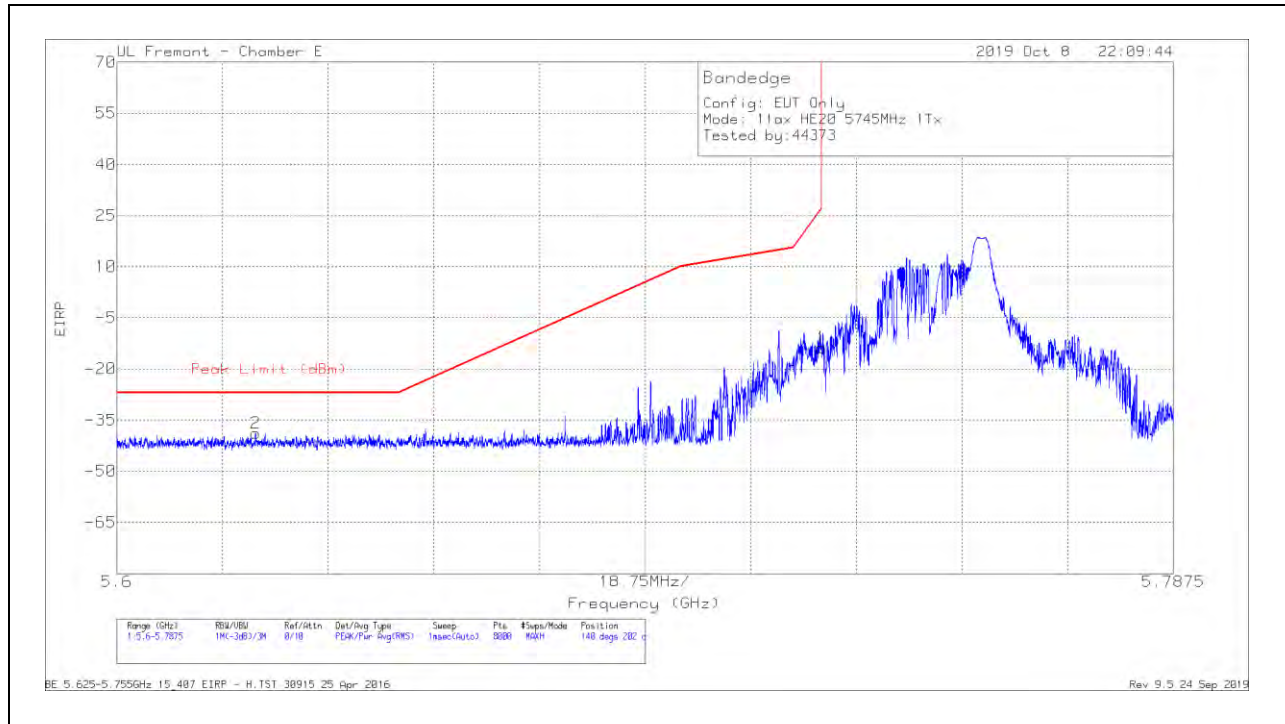

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62459	-64.16	Pk	34.8	-21.3	11.8	-38.86	-27	-11.86	140	202	H
1	5.72498	-39.48	Pk	34.8	-20.9	11.8	-13.78	26.96	-40.74	140	202	H

Pk - Peak detector

VERTICAL RESULT

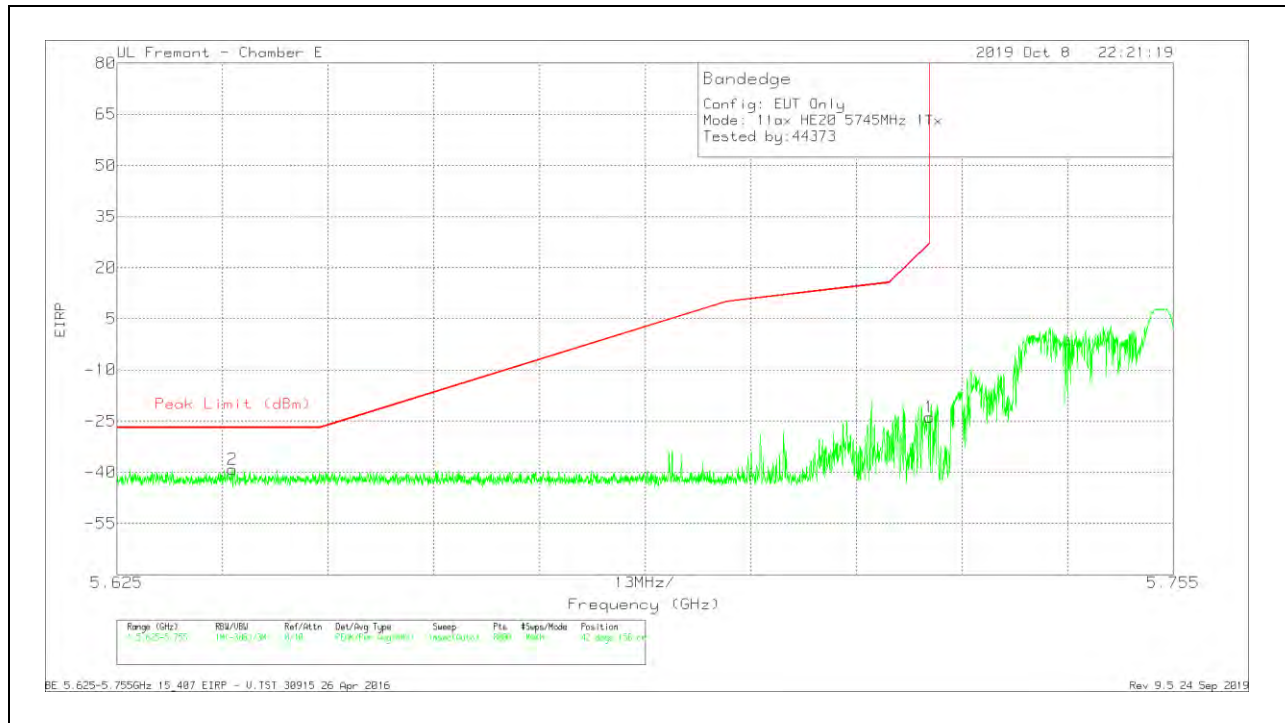


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6392	-64.36	Pk	34.8	-21.3	11.8	-39.06	-27	-12.06	42	156	V
1	5.725	-49.5	Pk	34.8	-20.9	11.8	-23.8	27	-50.8	42	156	V

Pk - Peak detector

1TX UAT2 MODE – 26 Tones, RU Index 8

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

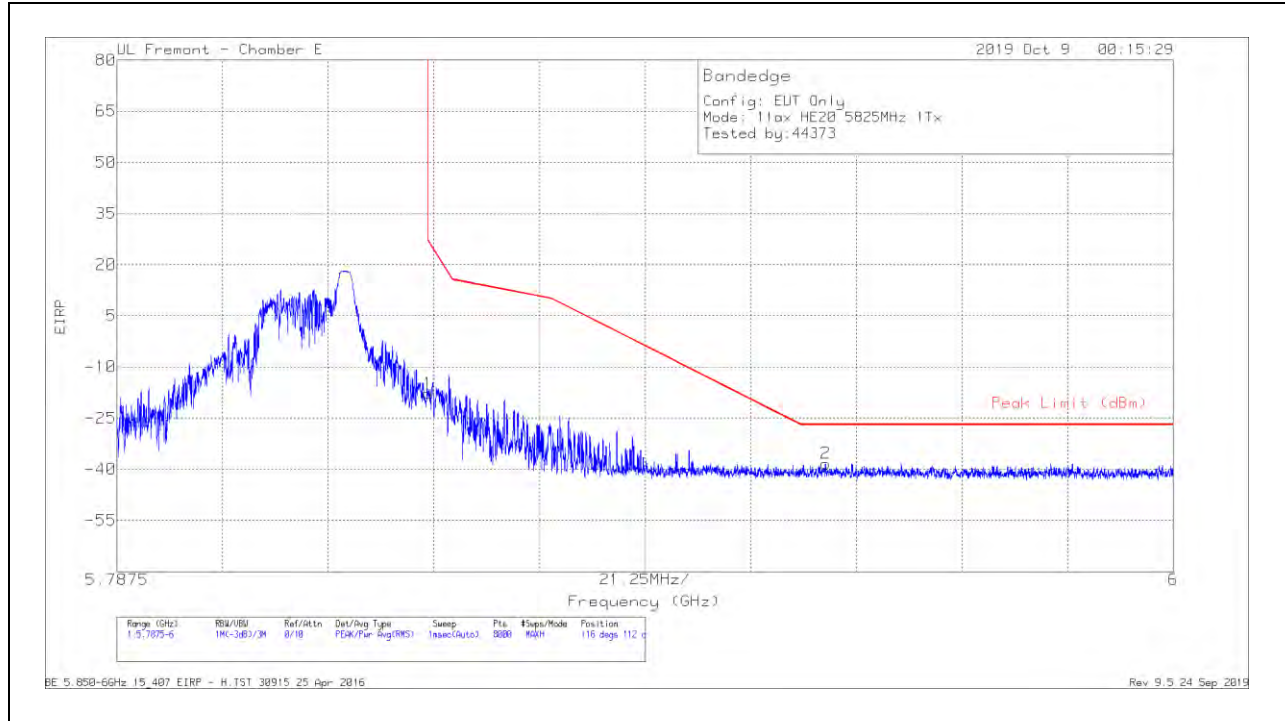

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-44.14	Pk	34.9	-20.3	11.8	-17.74	26.98	-44.72	116	112	H
2	5.93003	-64.71	Pk	35.1	-20.5	11.8	-38.31	-27	-11.31	116	112	H

Pk - Peak detector

VERTICAL RESULT

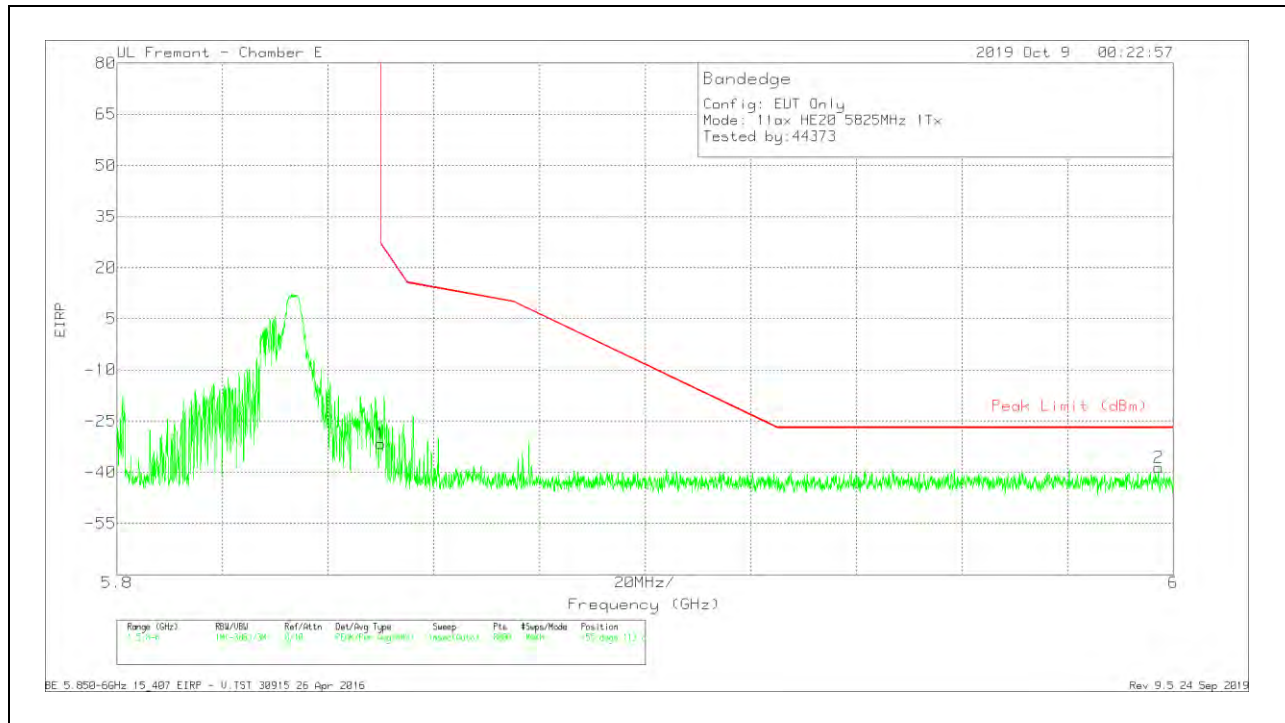


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-58.03	Pk	34.9	-20.3	11.8	-31.63	26.99	-58.62	155	113	V
2	5.99722	-65.15	Pk	35.1	-20.3	11.8	-38.55	-27	-11.55	155	113	V

Pk - Peak detector

1TX LAT3 MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

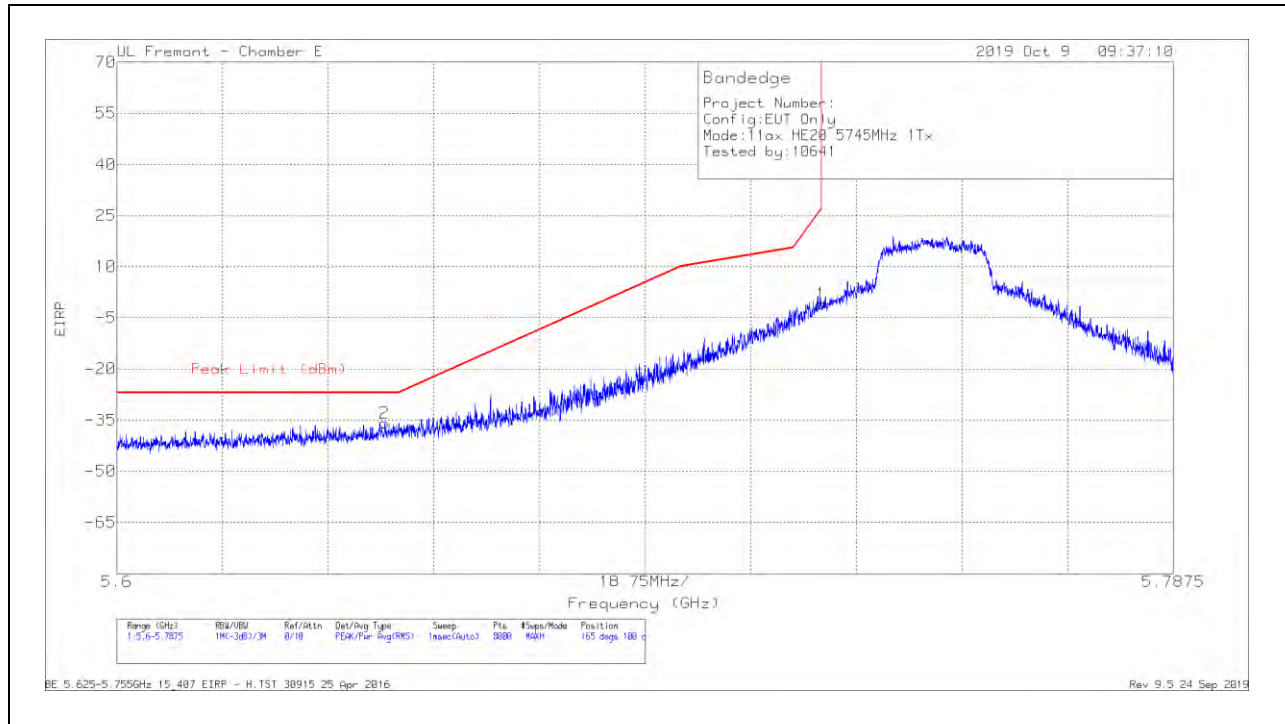

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64754	-61.36	Pk	34.8	-21.2	11.8	-35.96	-27	-8.96	165	100	H
1	5.72498	-26.57	Pk	34.8	-20.9	11.8	-.87	26.96	-27.83	165	100	H

Pk - Peak detector

VERTICAL RESULT

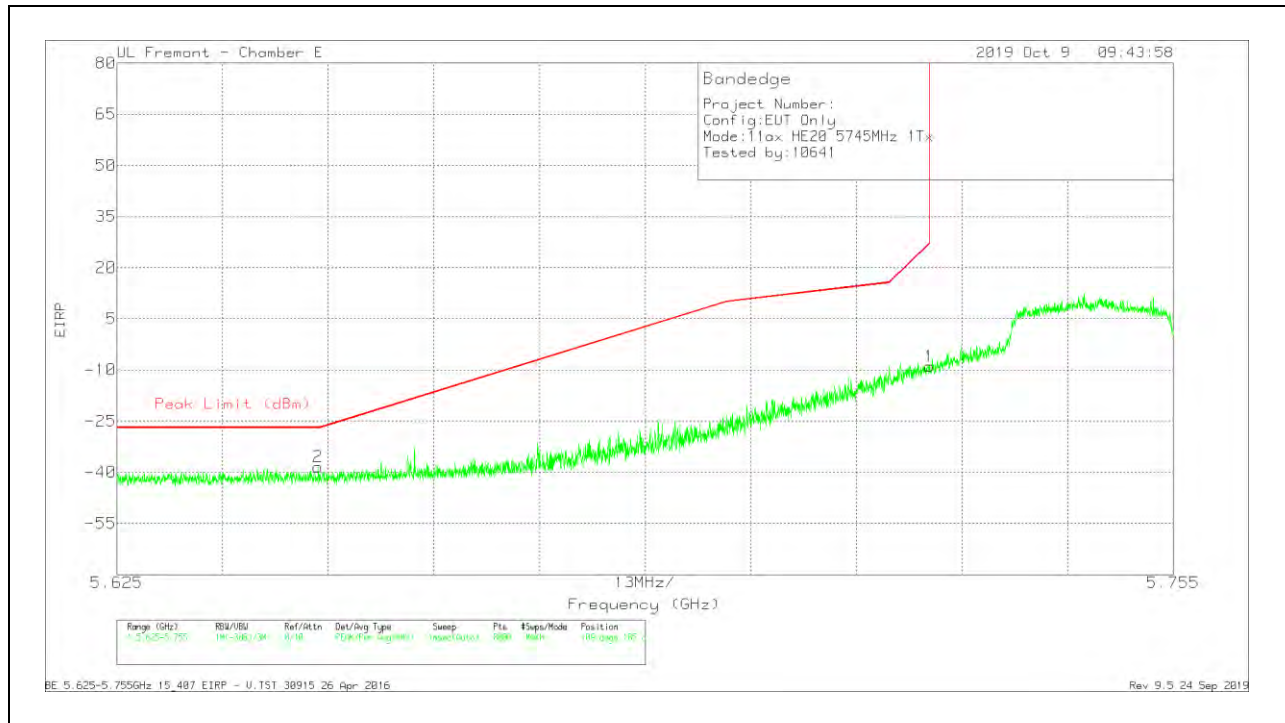


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64974	-34.71	Pk	34.8	-21.2	11.8	-38.48	-27	-11.48	109	185	V
1	5.725	-34.71	Pk	34.8	-20.9	11.8	-9.01	27	-36.01	109	185	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

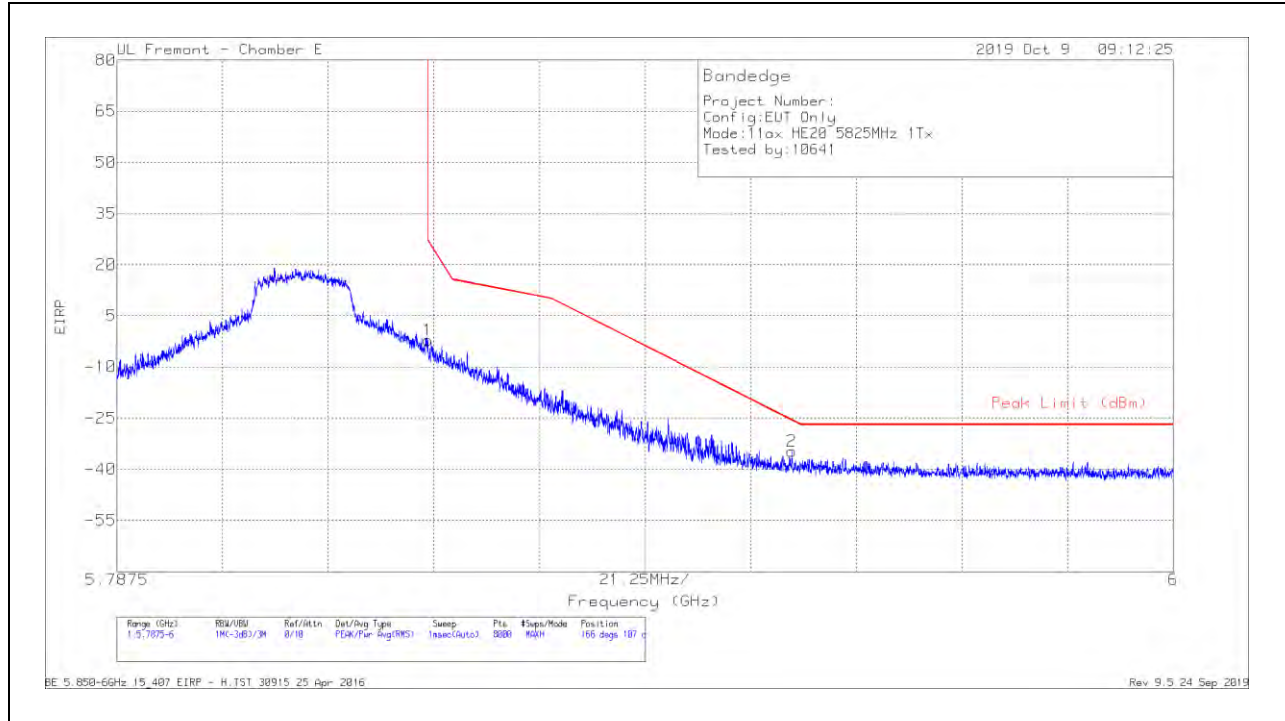

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-28.45	Pk	34.9	-20.3	11.8	-2.05	26.98	-29.03	166	107	H
2	5.92325	-60.96	Pk	35	-20.5	11.8	-34.66	-25.71	-8.95	166	107	H

Pk - Peak detector

VERTICAL RESULT

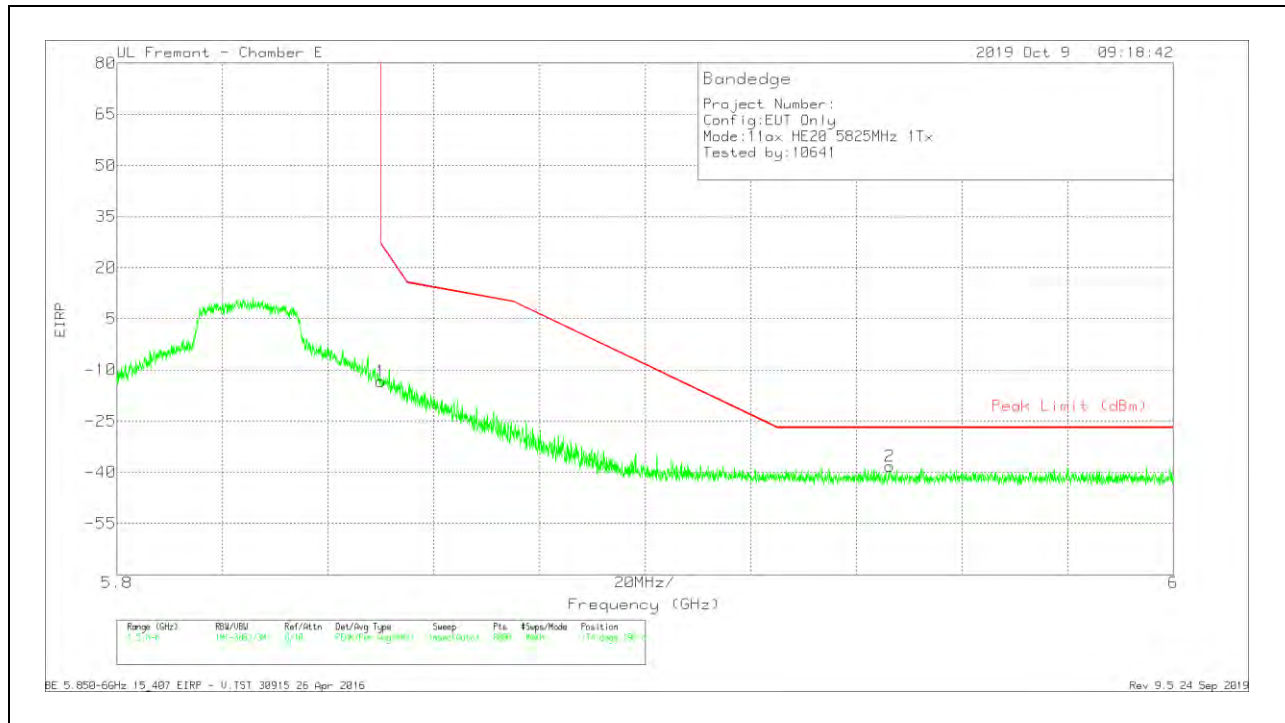


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-39.74	Pk	34.9	-20.3	11.8	-13.34	26.99	-40.33	174	196	V
2	5.94632	-64.55	Pk	35.1	-20.5	11.8	-38.15	-27	-11.15	174	196	V

Pk - Peak detector

1TX LAT3 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

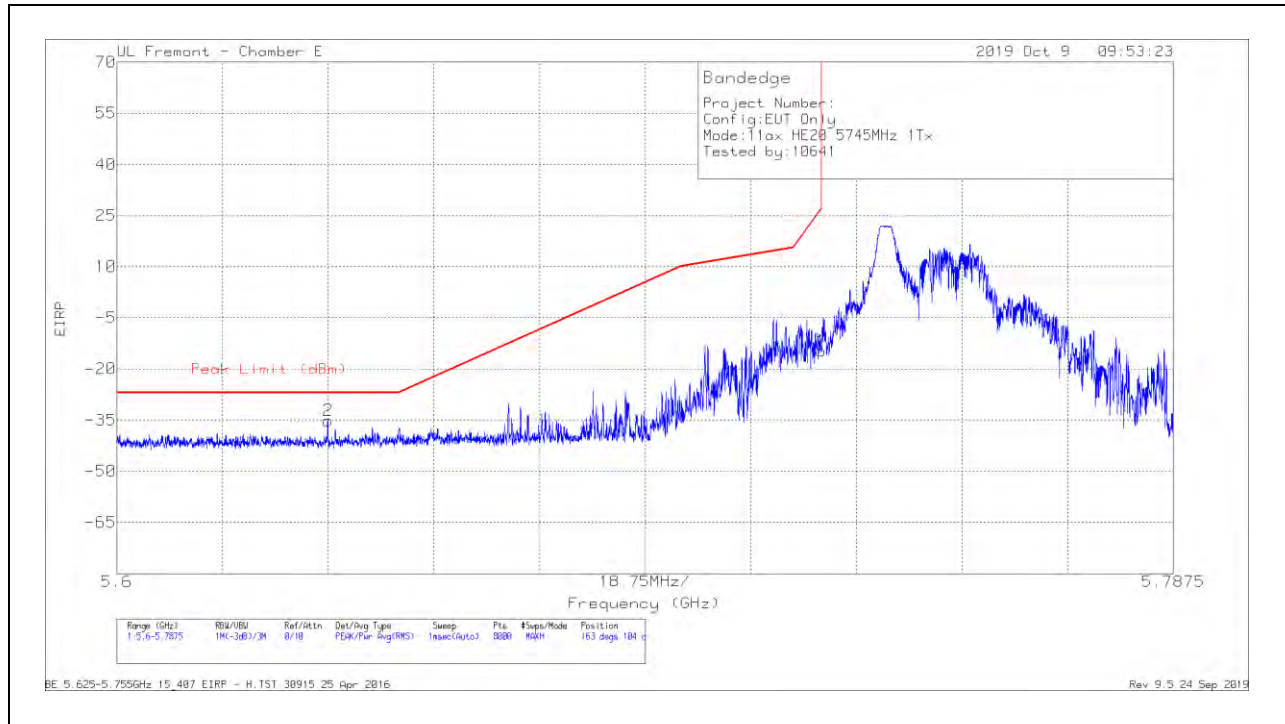

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63741	-60.47	Pk	34.8	-21.3	11.8	-35.17	-27	-8.17	163	104	H
1	5.72498	-40.34	Pk	34.8	-20.9	11.8	-14.64	26.96	-41.6	163	104	H

Pk - Peak detector

VERTICAL RESULT

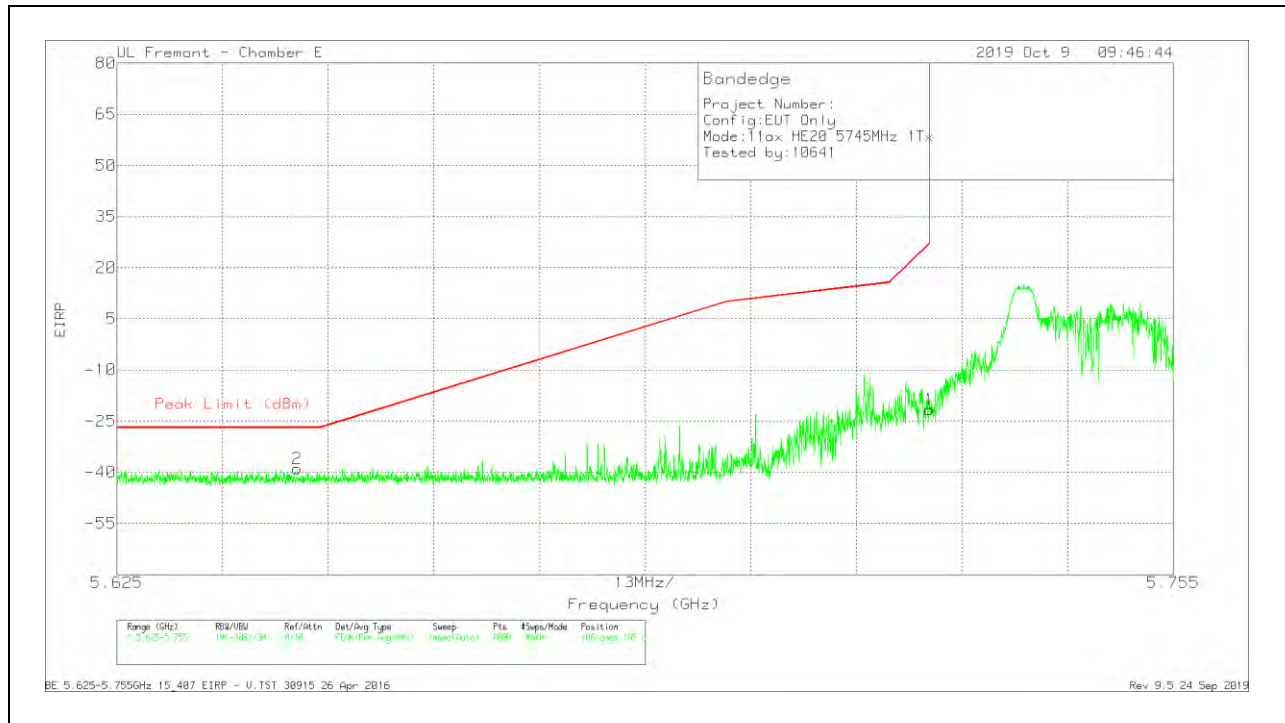


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64718	-64.39	Pk	34.8	-21.2	11.8	-38.99	-27	-11.99	108	185	V
1	5.725	-47.4	Pk	34.8	-20.9	11.8	-21.7	27	-48.7	108	185	V

Pk - Peak detector

1TX LAT3 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

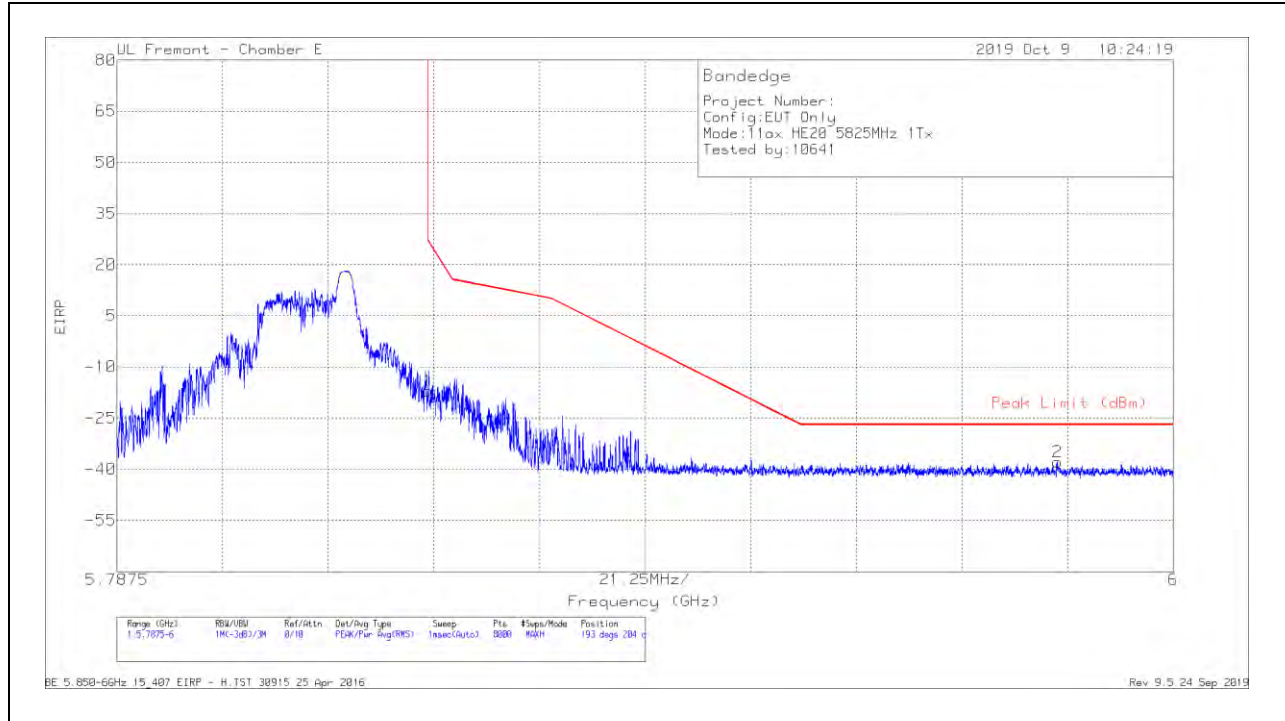

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-43.46	Pk	34.9	-20.3	11.8	-17.06	26.98	-44.04	193	204	H
2	5.97673	-64.32	Pk	35.2	-20.5	11.8	-37.82	-27	-10.82	193	204	H

Pk - Peak detector

VERTICAL RESULT

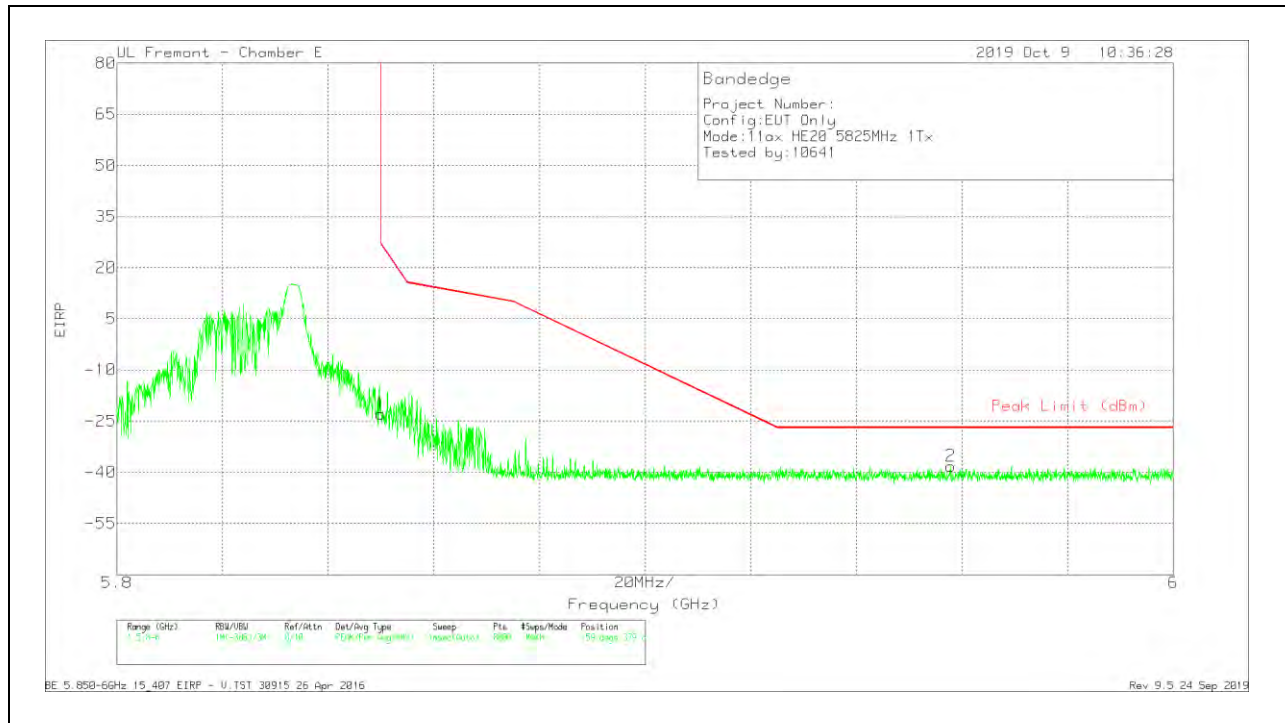


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-49.36	Pk	34.9	-20.3	11.8	-22.96	26.99	-49.95	159	379	V
2	5.95784	-64.53	Pk	35.1	-20.5	11.8	-38.13	-27	-11.13	159	379	V

Pk - Peak detector

2TX UAT2 + LAT3 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

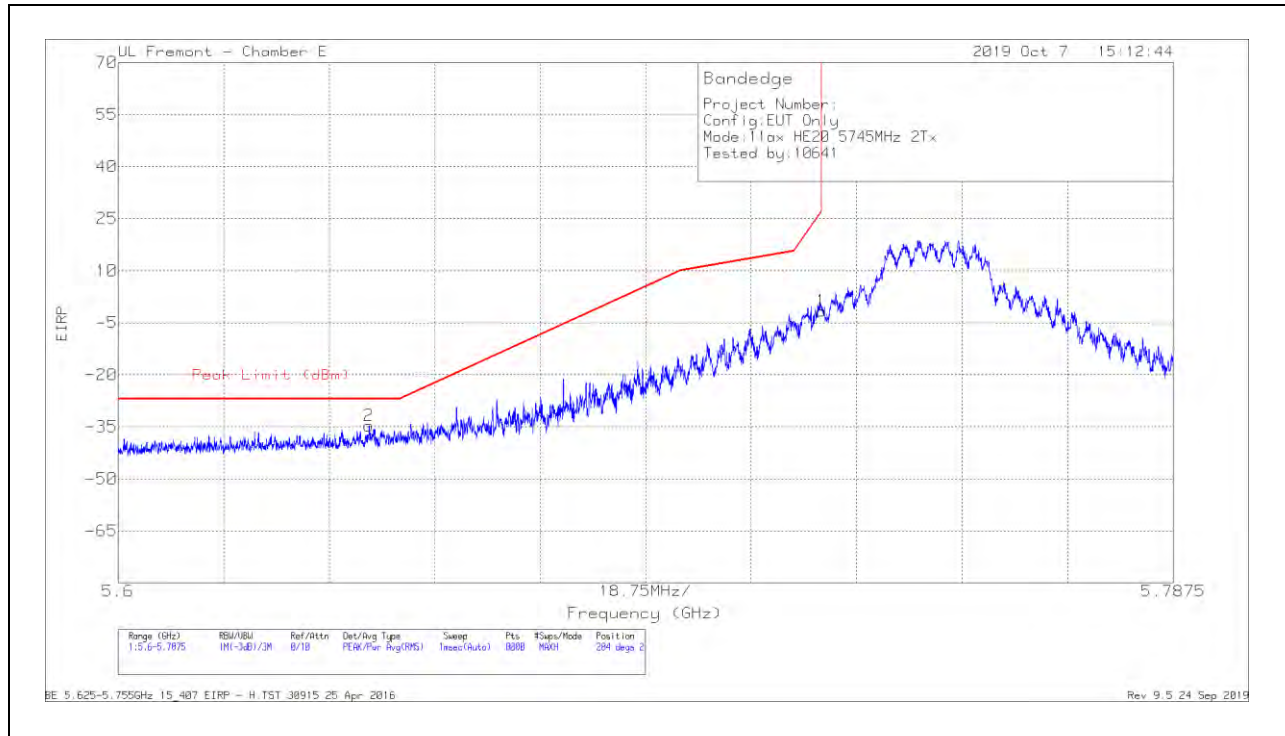

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64461	-59.99	Pk	34.8	-21.3	11.8	-34.69	-27	-7.69	284	215	H
1	5.72498	-27.27	Pk	34.8	-20.9	11.8	-1.57	26.96	-28.53	284	215	H

Pk - Peak detector

VERTICAL RESULT

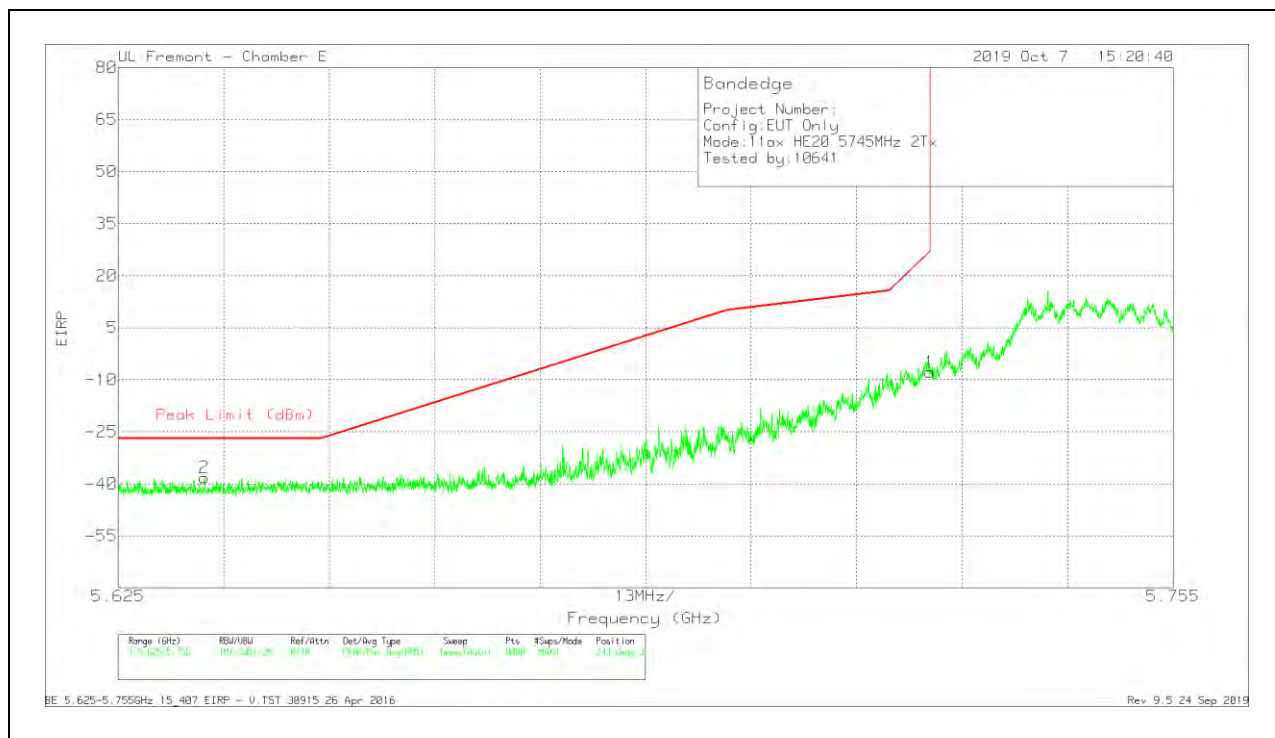


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63565	-63.37	Pk	34.7	-21.3	11.8	-38.17	-27	-11.17	243	370	V
1	5.725	-33.48	Pk	34.8	-20.9	11.8	-7.78	27	-34.78	243	370	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

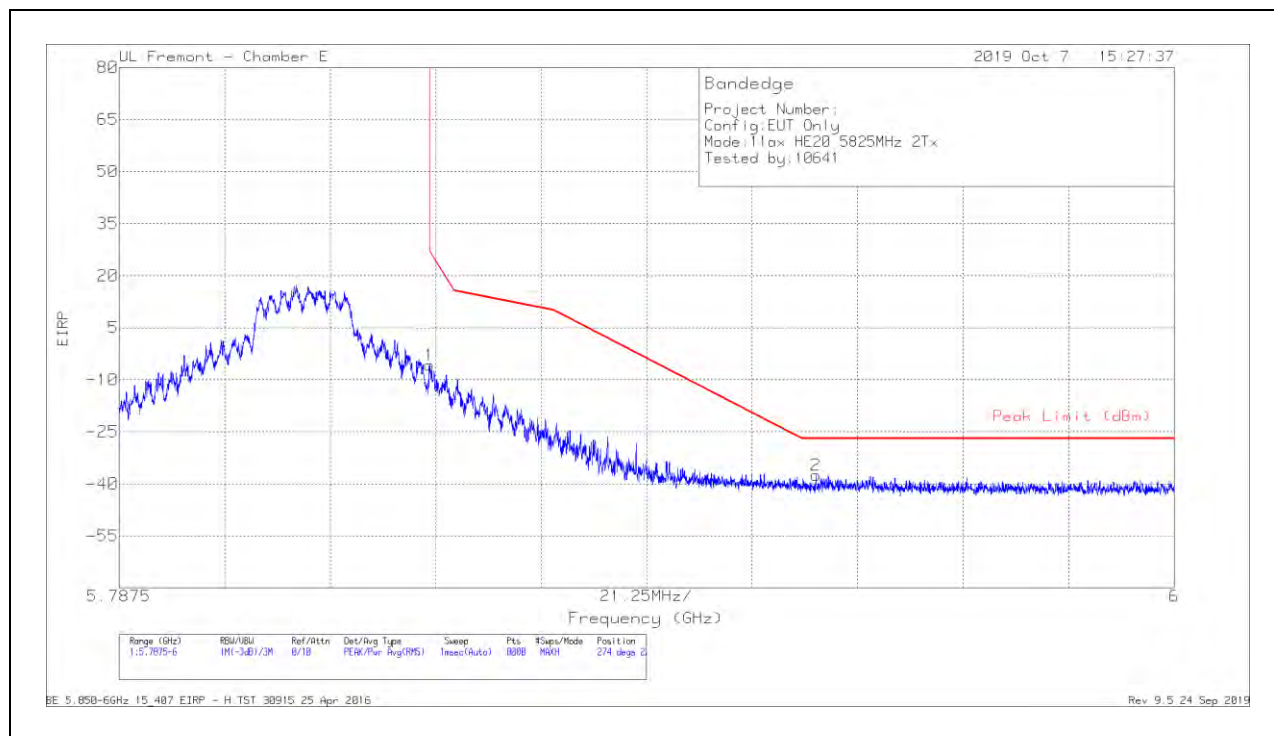

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-32.22	Pk	34.9	-20.3	11.8	-5.82	26.98	-32.8	274	225	H
2	5.92785	-63.94	Pk	35.1	-20.5	11.8	-37.54	-27	-10.54	274	225	H

Pk - Peak detector

VERTICAL RESULT


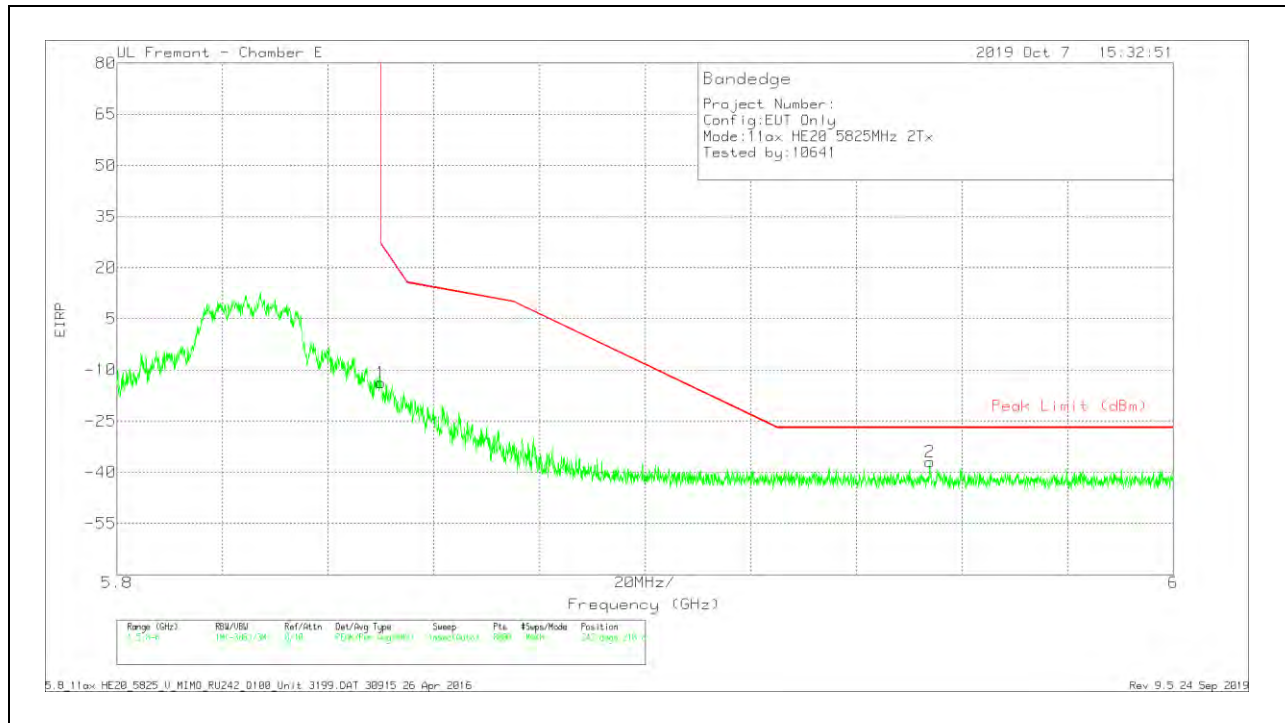


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-40.08	Pk	34.9	-20.3	11.8	-13.68	26.99	-40.67	242	210	V
2	5.95392	-63.3	Pk	35	-20.5	11.8	-37	-27	-10	242	210	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

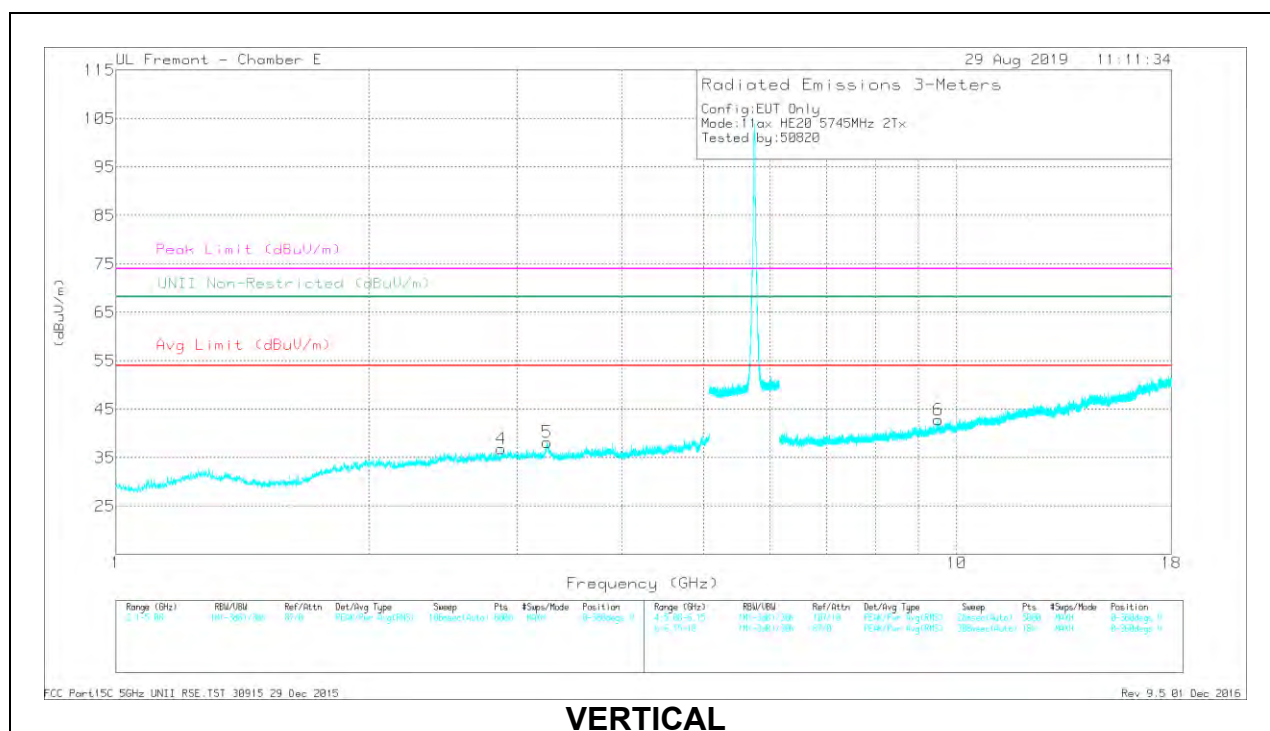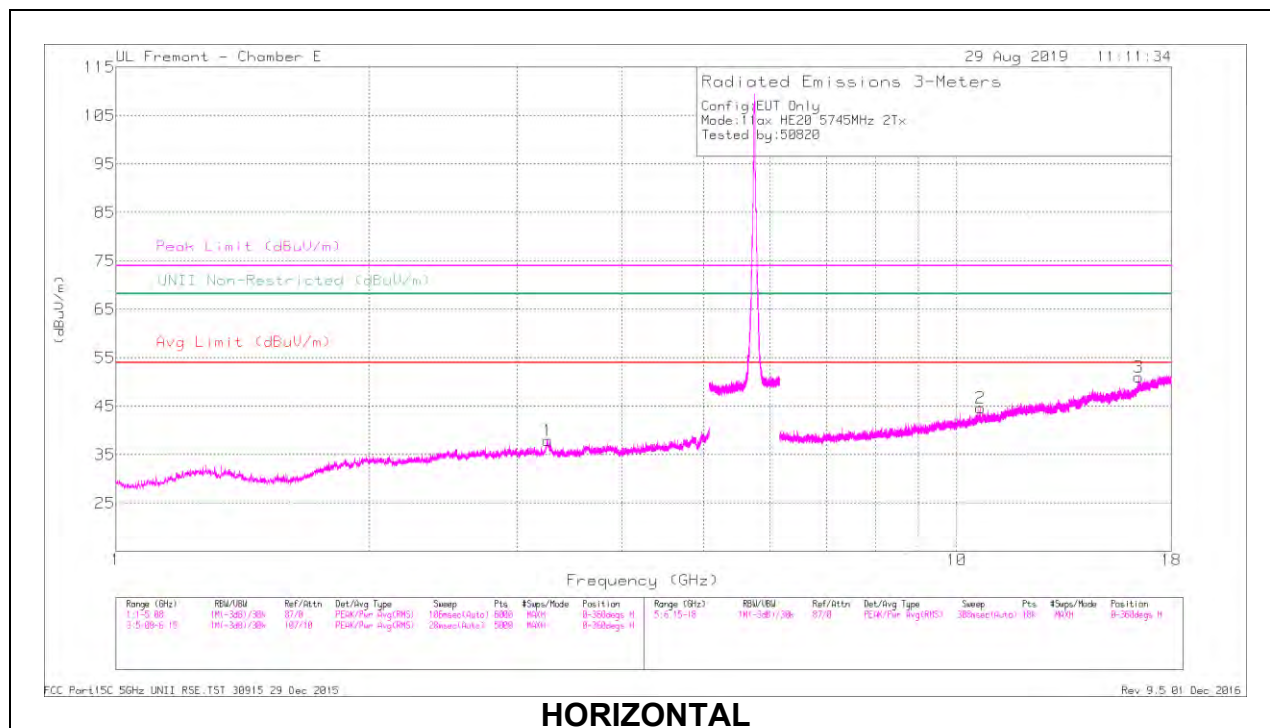

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.261	45.27	PK-U	35.1	-34.5	45.87	-	-	74	-28.13	-	-	254	115	H
	* 3.261	32.81	ADR	35.1	-34.5	33.41	54	-20.59	-	-	-	-	254	115	H
4	* 2.875	45.37	PK-U	33	-35.3	43.07	-	-	74	-30.93	-	-	226	387	V
	* 2.874	33.61	ADR	33	-35.3	31.31	54	-22.69	-	-	-	-	226	387	V
5	* 3.262	45.03	PK-U	35.1	-34.5	45.63	-	-	74	-28.37	-	-	280	350	V
	* 3.261	32.8	ADR	35.1	-34.5	33.4	54	-20.6	-	-	-	-	280	350	V
2	* 10.674	37.24	PK-U	37.9	-25.3	49.84	-	-	74	-24.16	-	-	26	134	H
	* 10.672	25.77	ADR	37.9	-25.3	38.37	54	-15.63	-	-	-	-	26	134	H
6	9.504	37.08	PK-U	36.7	-24.9	48.88	-	-	-	-	68.2	-19.32	143	167	V
3	16.465	34.89	PK-U	41	-18.8	57.09	-	-	-	-	68.2	-11.11	52	258	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average