


VERTICAL RESULT

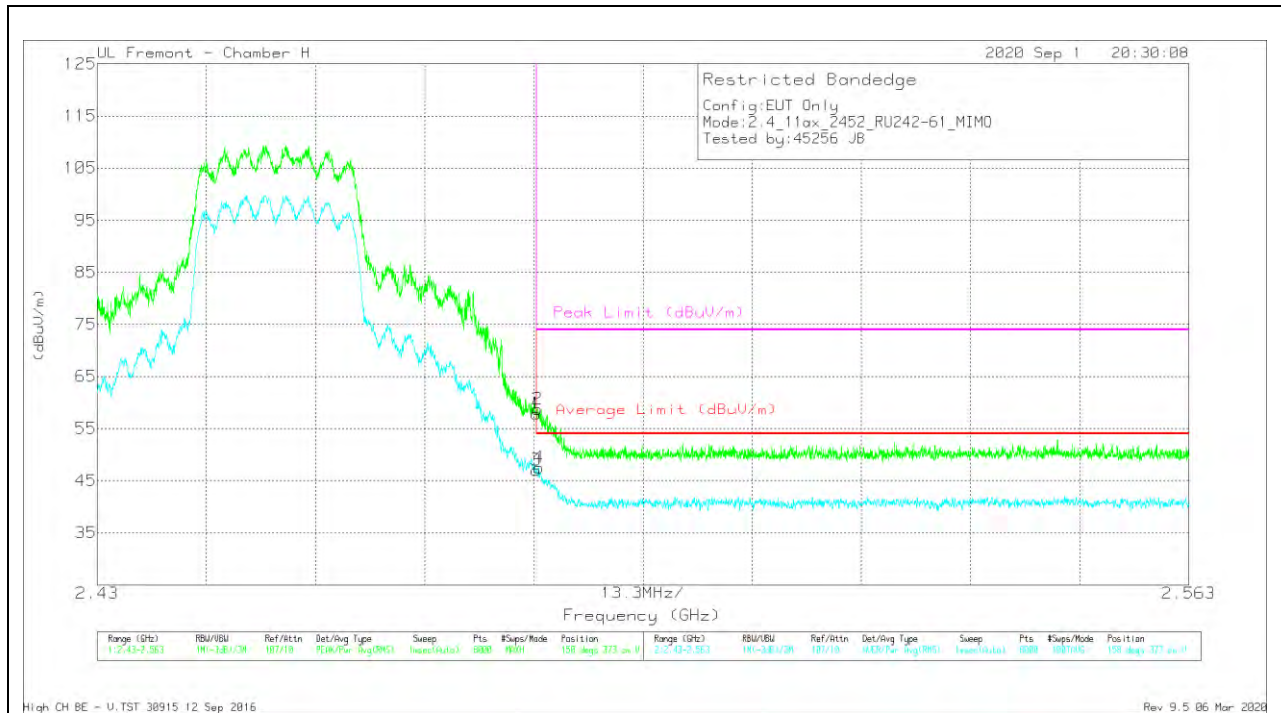


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polariz
1	*2.48351	49.28	PK	32.3	-23.7	0	57.88	-	-	74	-16.12	158	373	V
2	*2.48362	50.14	PK	32.3	-23.7	0	58.74	-	-	74	-15.26	158	373	V
3	*2.48351	38.42	RMS	32.3	-23.7	0	47.02	54	-6.98	-	-	158	373	V
4	*2.48377	38.88	RMS	32.3	-23.7	0	47.48	54	-6.52	-	-	158	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

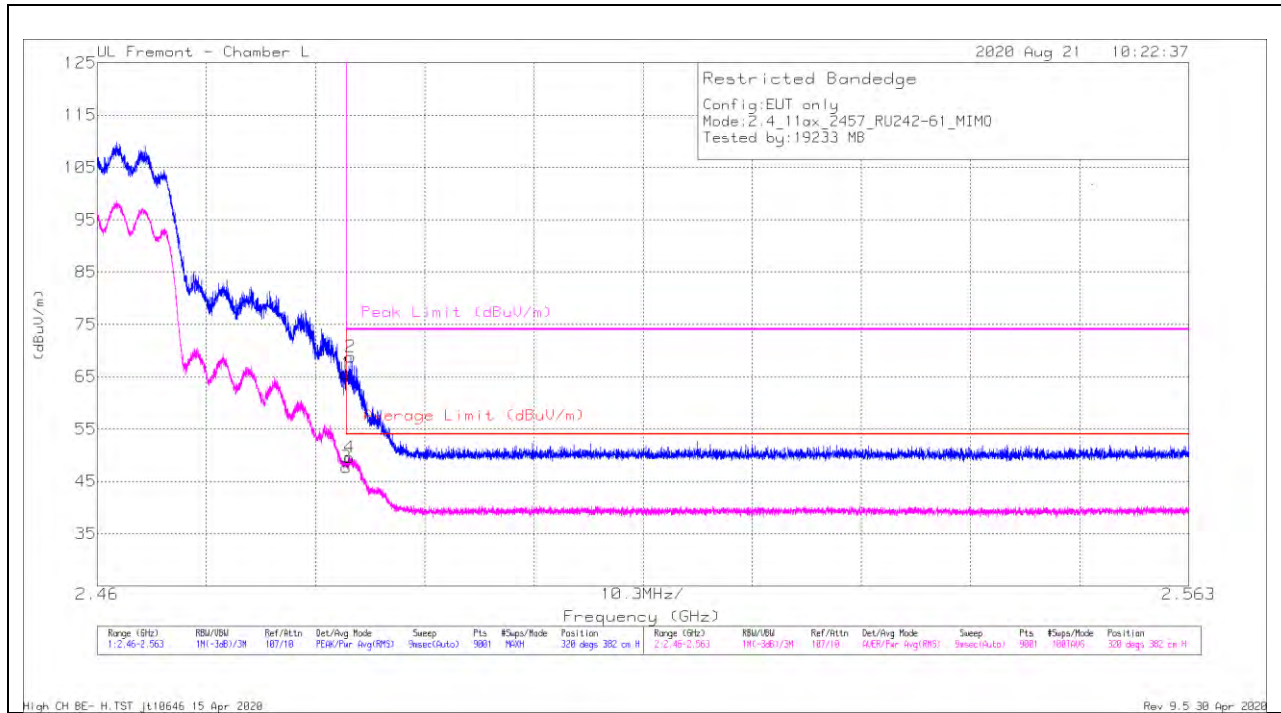


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.21	Pk	32.3	-20.9	65.61	-	-	74	-8.39	320	382	H
2	* 2.48395	57.34	Pk	32.3	-20.9	68.74	-	-	74	-5.26	320	382	H
3	* 2.48351	36.33	RMS	32.3	-20.9	47.73	54	-6.27	-	-	320	382	H
4	* 2.48383	38.19	RMS	32.3	-20.9	49.59	54	-4.41	-	-	320	382	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

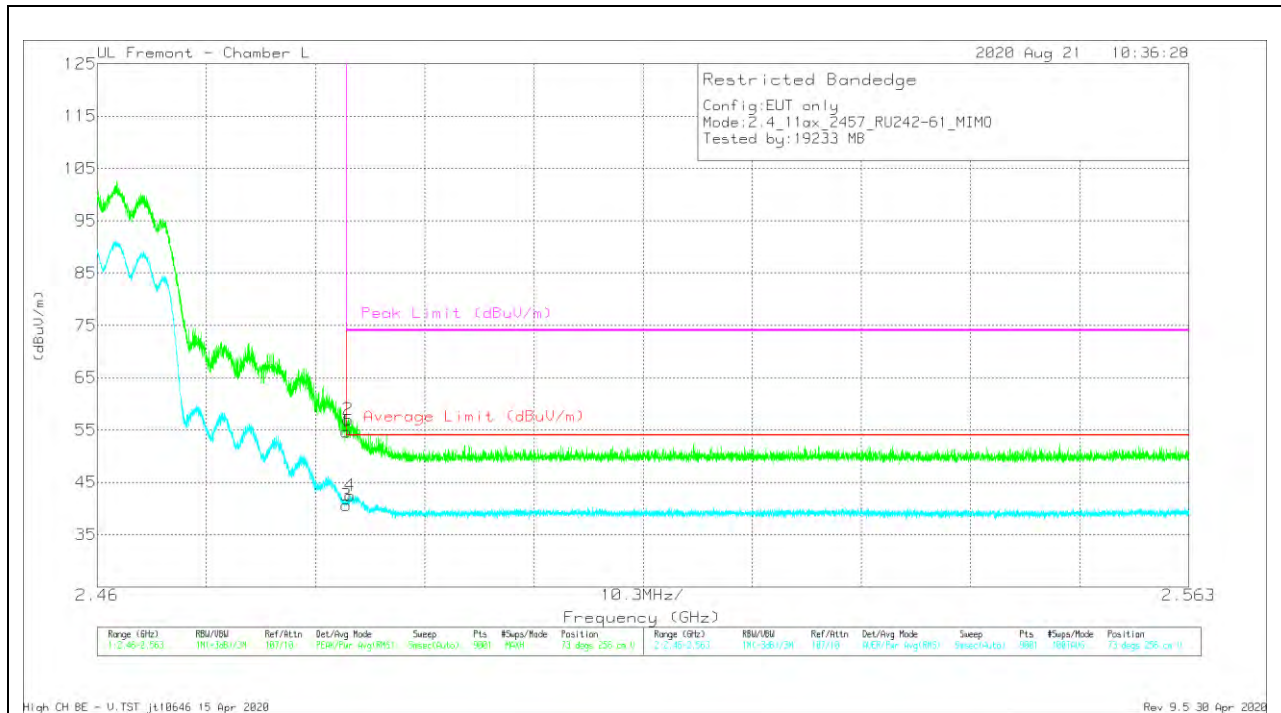

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb1/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.18	Pk	32.3	-20.9	54.58	-	-	74	-19.42	73	256	V
2	* 2.48369	45.62	Pk	32.3	-20.9	57.02	-	-	74	-16.98	73	256	V
3	* 2.48351	29.22	RMS	32.3	-20.9	40.62	54	-13.38	-	-	73	256	V
4	* 2.48387	31.1	RMS	32.3	-20.9	42.5	54	-11.5	-	-	73	256	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

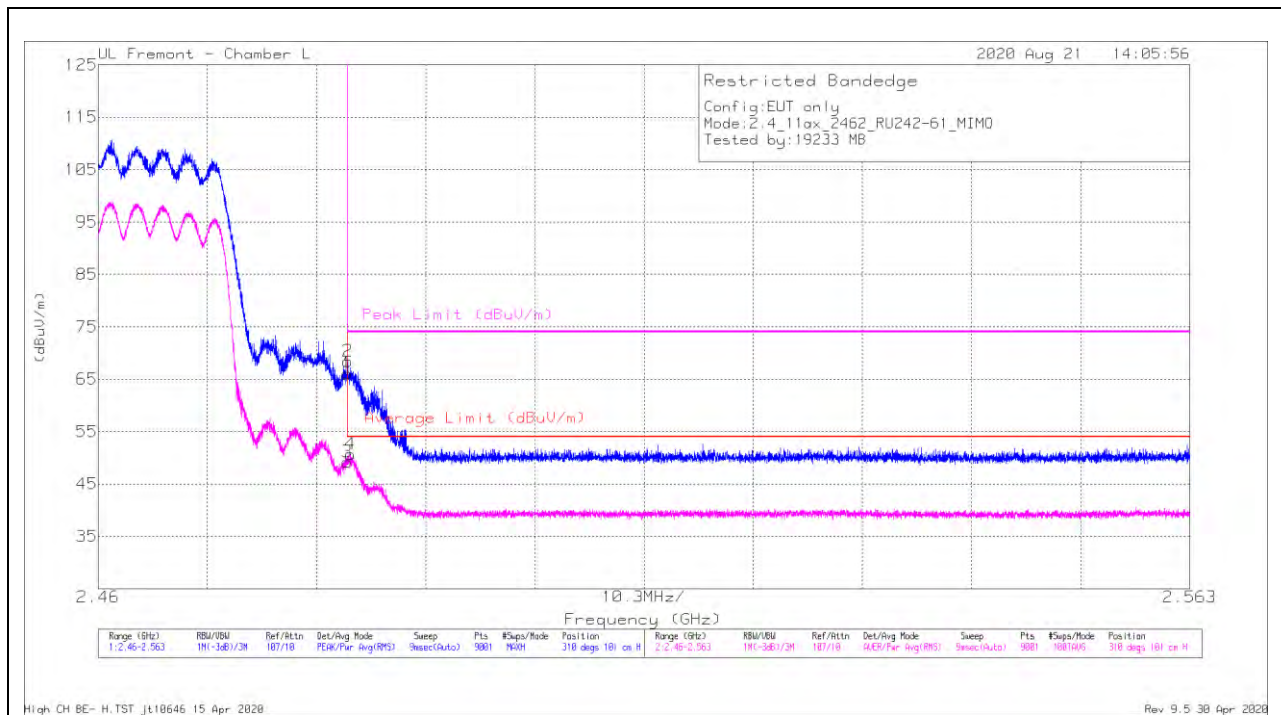


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.64	Pk	32.3	-20.9	66.04	-	-	74	-7.96	310	101	H
2	* 2.48354	57	Pk	32.3	-20.9	68.4	-	-	74	-5.6	310	101	H
3	* 2.48351	37.76	RMS	32.3	-20.9	49.16	54	-4.84	-	-	310	101	H
4	* 2.48382	39.25	RMS	32.3	-20.9	50.65	54	-3.35	-	-	310	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

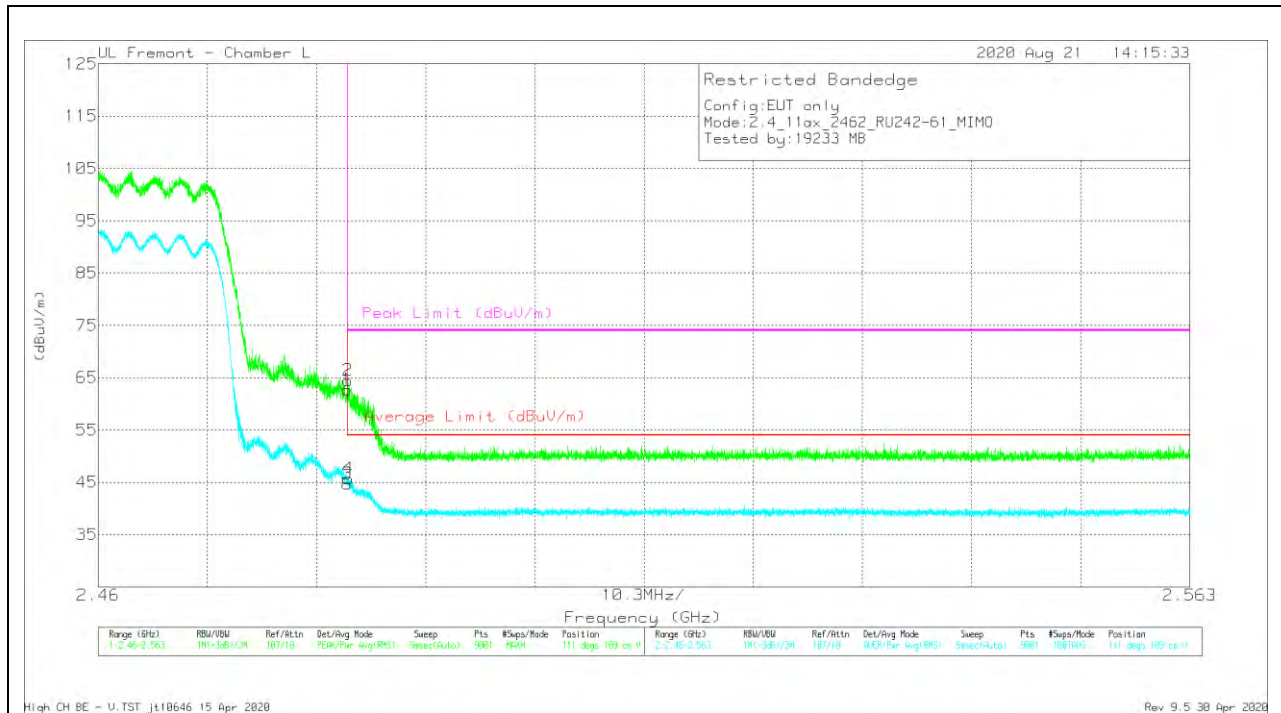

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.3	Pk	32.3	-20.9	62.7	-	-	74	-11.3	111	109	V
2	* 2.48354	53.07	Pk	32.3	-20.9	64.47	-	-	74	-9.53	111	109	V
3	* 2.48351	33.29	RMS	32.3	-20.9	44.69	54	-9.31	-	-	111	109	V
4	* 2.48359	34.31	RMS	32.3	-20.9	45.71	54	-8.29	-	-	111	109	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

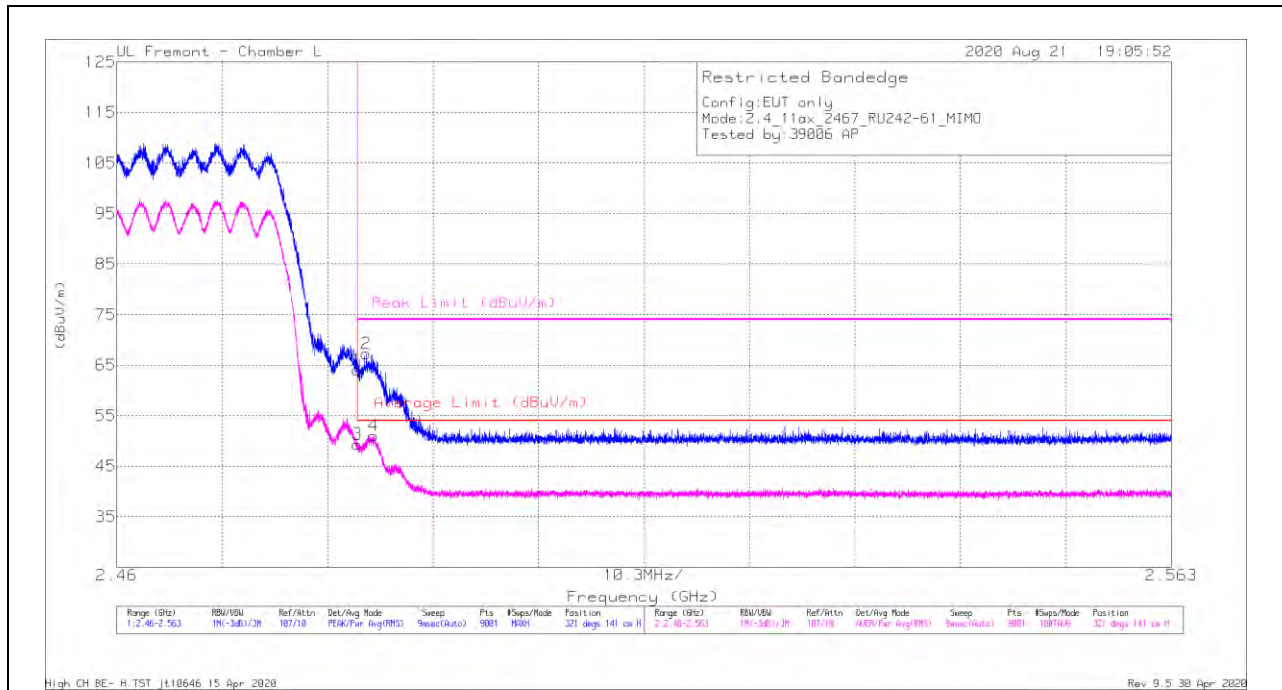


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.65	Pk	32.3	-20.9	64.05	-	-	74	-9.95	321	141	H
2	* 2.48438	55.89	Pk	32.3	-20.9	67.29	-	-	74	-6.71	321	141	H
3	* 2.48351	37.96	RMS	32.3	-20.9	49.36	54	-4.64	-	-	321	141	H
4	* 2.48511	39.62	RMS	32.3	-20.9	51.02	54	-2.98	-	-	321	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

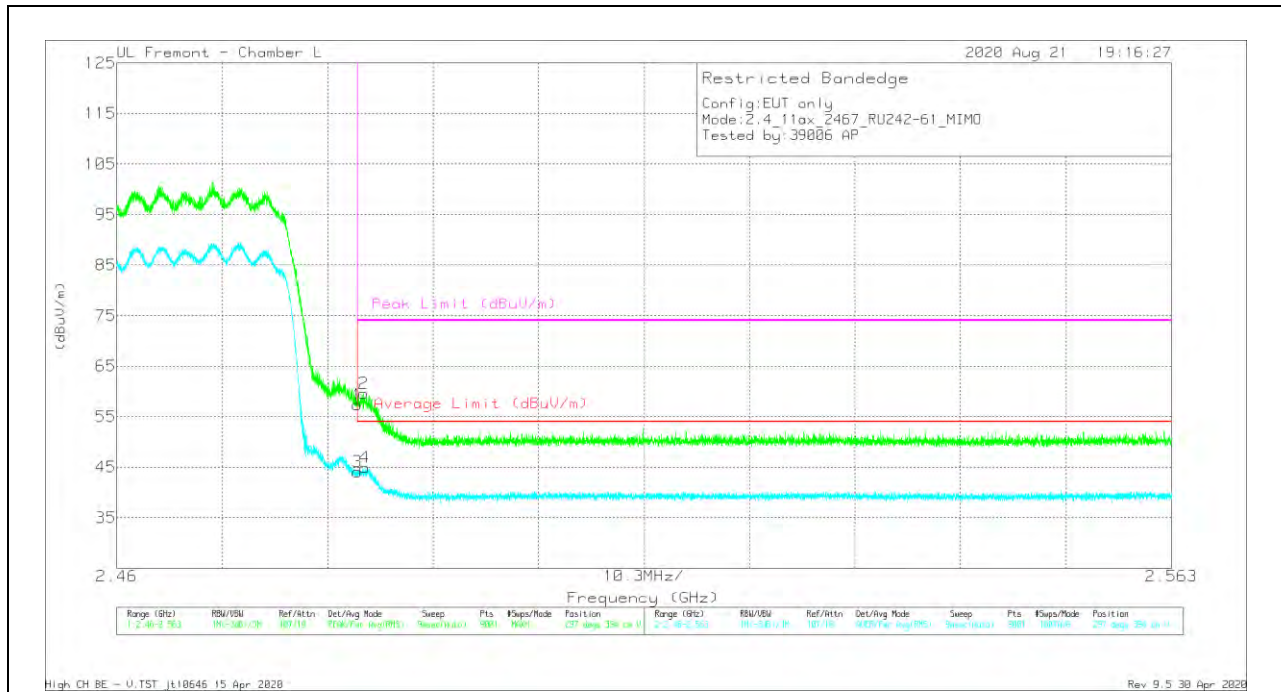

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.99	Pk	32.3	-20.9	57.39	-	-	74	-16.61	297	394	V
2	* 2.48412	48.25	Pk	32.3	-20.9	59.65	-	-	74	-14.35	297	394	V
3	* 2.48351	32.7	RMS	32.3	-20.9	44.1	54	-9.9	-	-	297	394	V
4	* 2.48422	33.56	RMS	32.3	-20.9	44.96	54	-9.04	-	-	297	394	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

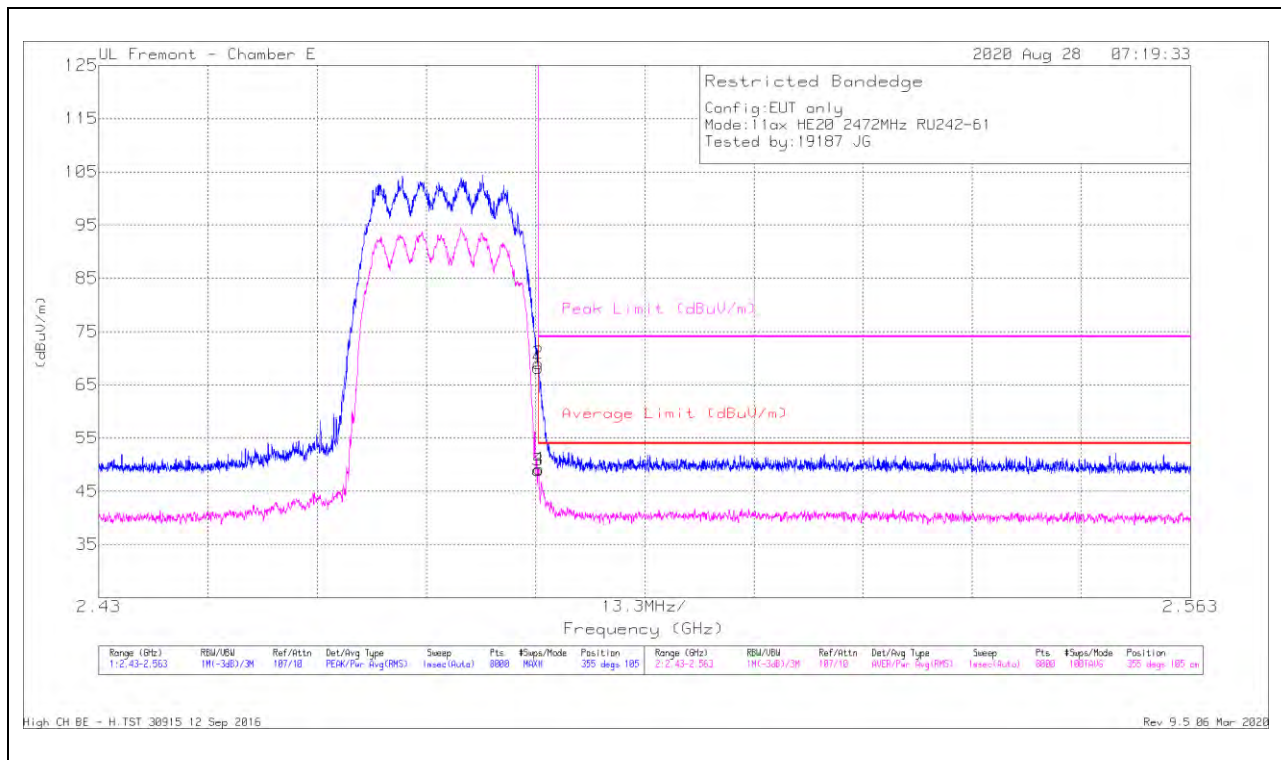


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	61.92	Pk	32.8	-26.5	68.22	-	-	74	-5.78	355	105	H
2	* 2.48356	62.71	Pk	32.8	-26.5	69.01	-	-	74	-4.99	355	105	H
3	* 2.48351	42.64	RMS	32.8	-26.5	48.94	54	-5.06	-	-	355	105	H
4	* 2.48359	42.87	RMS	32.8	-26.5	49.17	54	-4.83	-	-	355	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

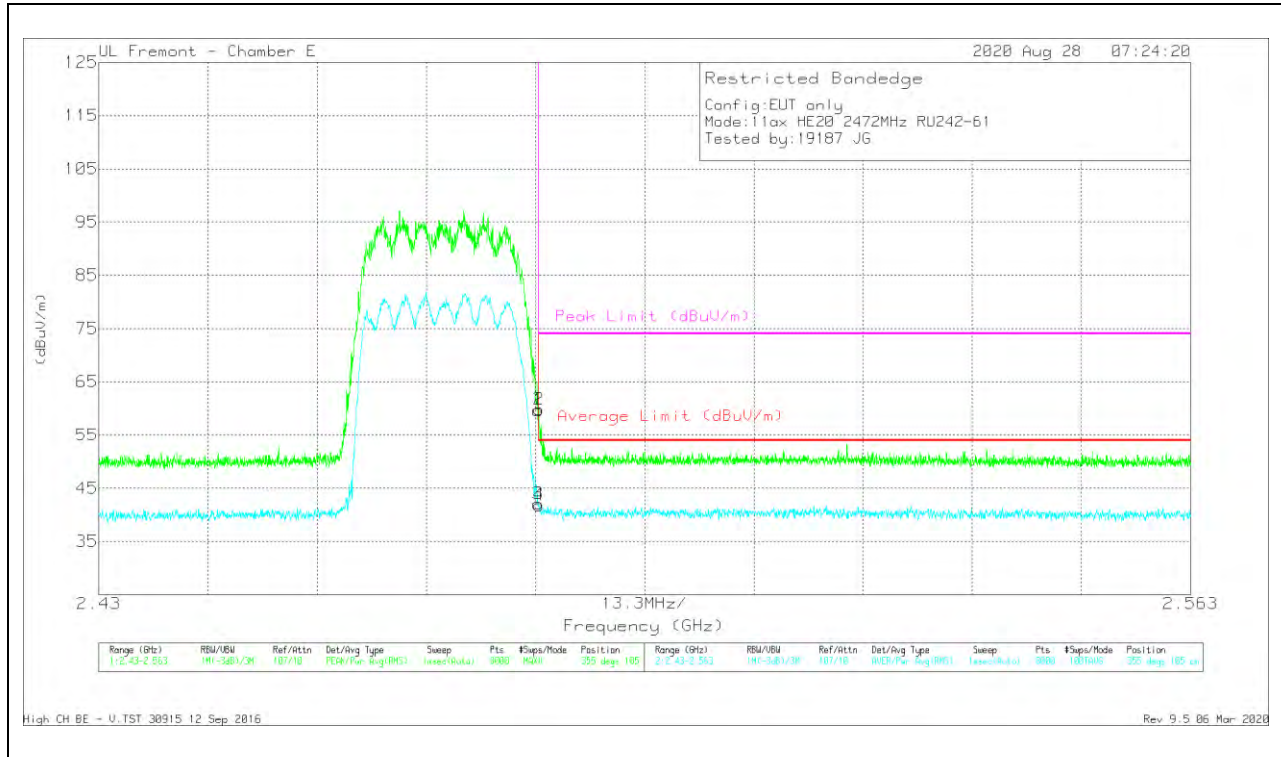

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.36	Pk	32.8	-26.5	59.66	-	-	74	-14.34	355	105	V
2	* 2.48361	53.52	Pk	32.8	-26.5	59.82	-	-	74	-14.18	355	105	V
3	* 2.48351	35.79	RMS	32.8	-26.5	42.09	54	-11.91	-	-	355	105	V
4	* 2.48359	35.51	RMS	32.8	-26.5	41.81	54	-12.19	-	-	355	105	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

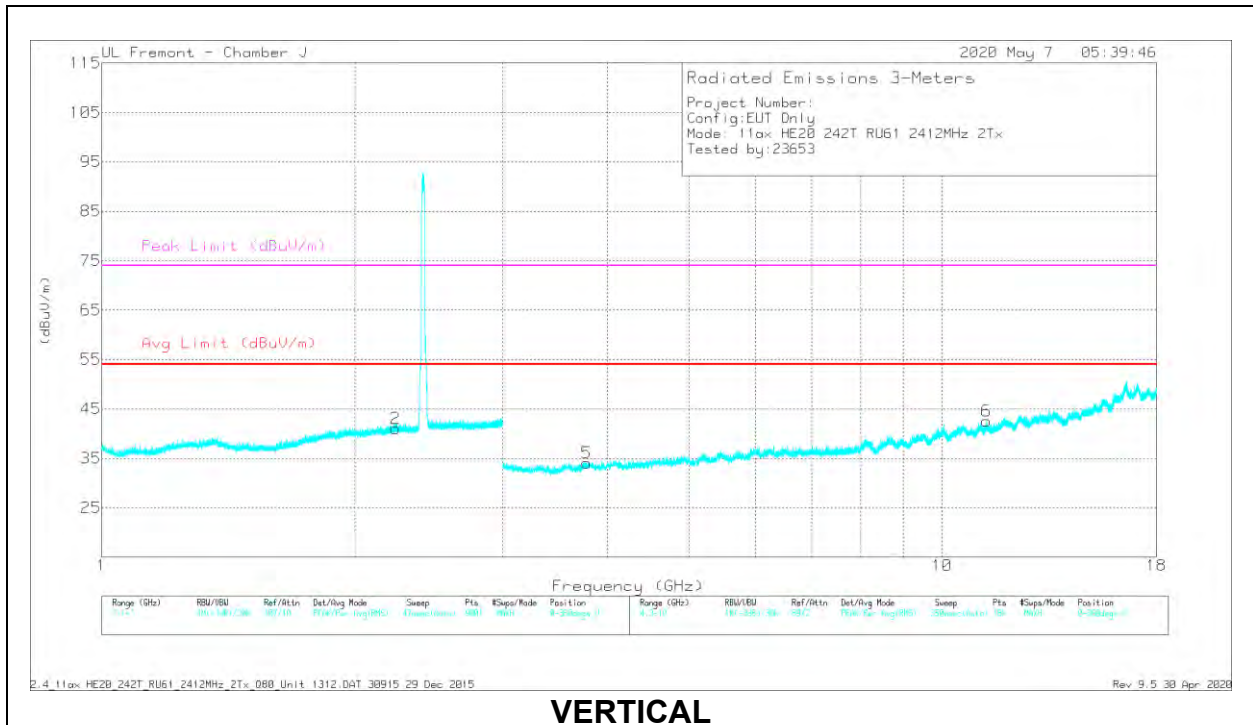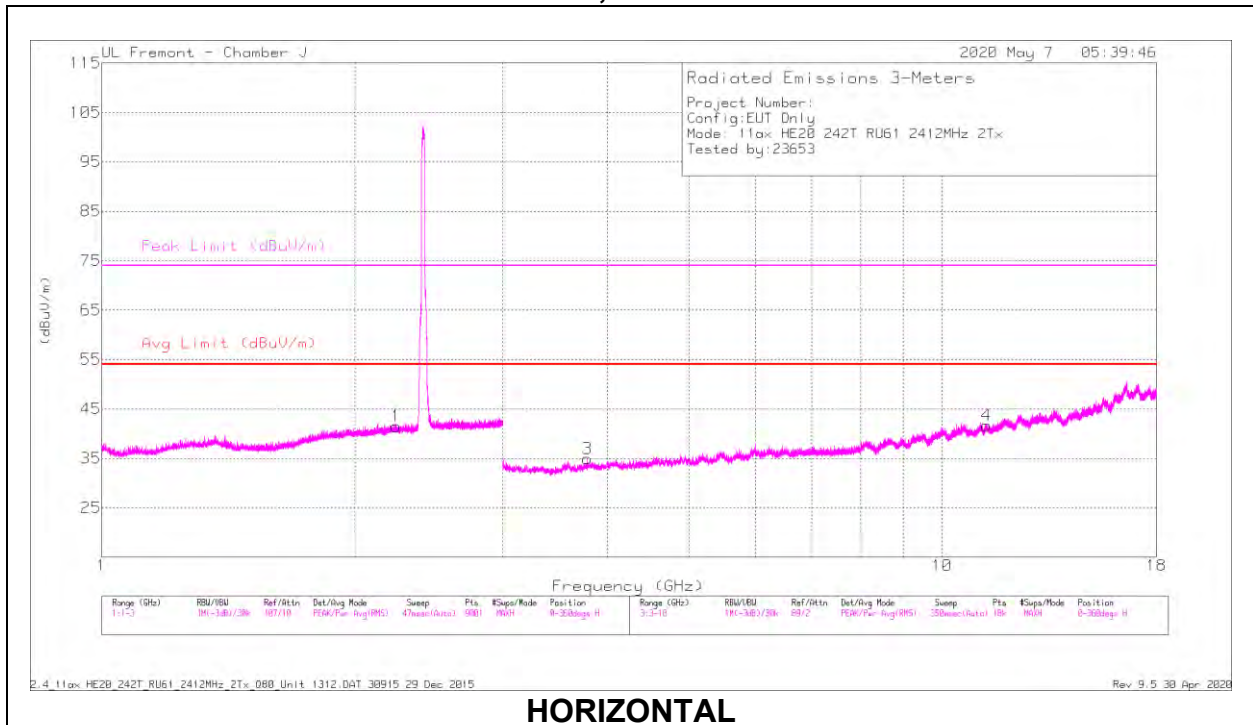

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.24122	43.52	PK2	31.7	-25.6	49.62	-	-	74	-24.38	215	234	H
	* 2.23898	32.93	MAv1	31.7	-25.5	39.13	54	-14.87	-	-	215	234	H
2	* 2.24003	43.84	PK2	31.7	-25.6	49.94	-	-	74	-24.06	276	212	V
	* 2.23785	33.12	MAv1	31.7	-25.5	39.32	54	-14.68	-	-	276	212	V
3	* 3.78329	41.98	PK2	33.5	-32.6	42.88	-	-	74	-31.12	204	174	H
	* 3.78139	31.17	MAv1	33.5	-32.6	32.07	54	-21.93	-	-	204	174	H
4	* 11.29699	34.7	PK2	38	-22.6	50.1	-	-	74	-23.9	149	254	H
	* 11.29683	24.11	MAv1	38	-22.5	39.61	54	-14.39	-	-	149	254	H
5	* 3.77471	40.88	PK2	33.4	-32.6	41.68	-	-	74	-32.32	222	146	V
	* 3.77499	30.59	MAv1	33.4	-32.6	31.39	54	-22.61	-	-	222	146	V
6	* 11.31163	34.09	PK2	38	-22.5	49.59	-	-	74	-24.41	105	223	V
	* 11.31092	23.5	MAv1	38	-22.5	39	54	-15	-	-	105	223	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

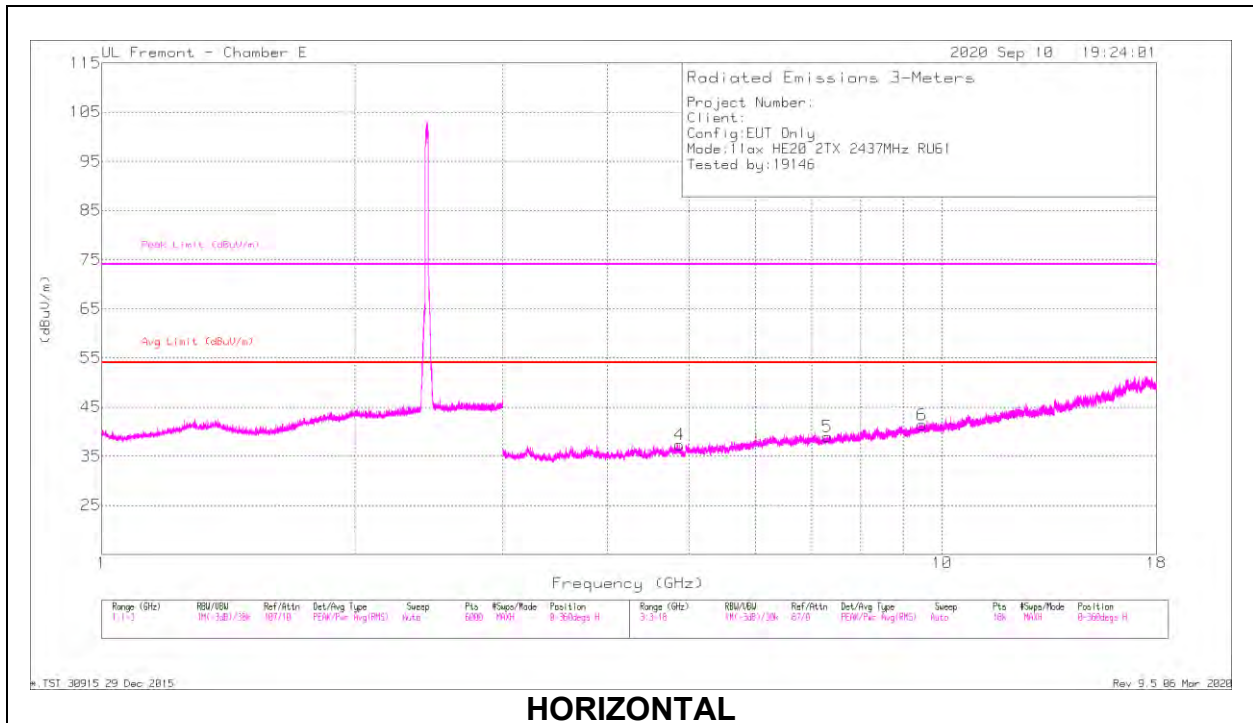

HORIZONTAL

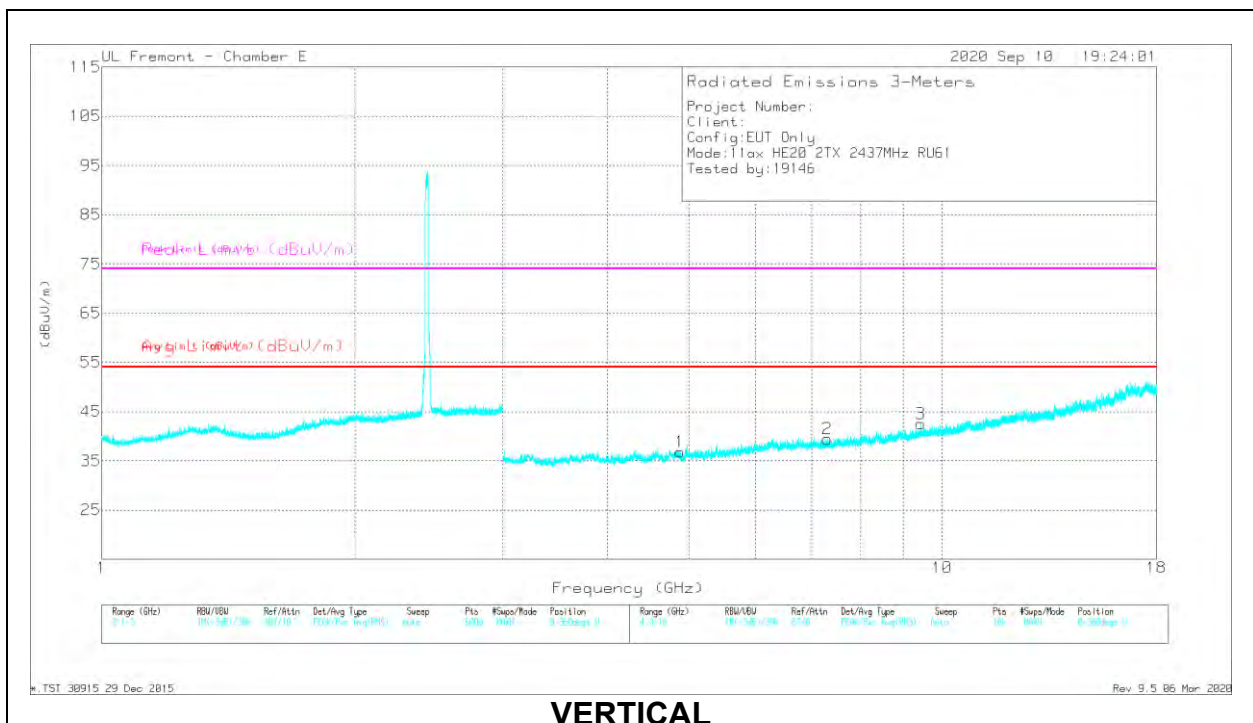

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 4.86915	41.14	PK2	34	-31.3	43.84	-	-	74	-30.16	4	309	H
	* 4.86575	29.45	MAv1	34	-31.3	32.15	54	-21.85	-	-	4	309	H
5	* 7.30757	38.24	PK2	35.6	-28	45.84	-	-	74	-28.16	358	120	H
	* 7.30872	26.42	MAv1	35.6	-28	34.02	54	-19.98	-	-	358	120	H
6	* 9.46001	36.79	PK2	36.6	-25.1	48.29	-	-	74	-25.71	91	241	H
	* 9.46226	24.64	MAv1	36.6	-25.1	36.14	54	-17.86	-	-	91	241	H
1	* 4.88049	41.03	PK2	34.1	-31.2	43.93	-	-	74	-30.07	185	112	V
	* 4.88075	29.14	MAv1	34.1	-31.2	32.04	54	-21.96	-	-	185	112	V
2	* 7.30044	38.51	PK2	35.5	-27.9	46.11	-	-	74	-27.89	244	138	V
	* 7.30227	26.31	MAv1	35.6	-27.9	34.01	54	-19.99	-	-	244	138	V
3	* 9.44007	36.24	PK2	36.5	-25.1	47.64	-	-	74	-26.36	312	197	V
	* 9.43734	24.66	MAv1	36.5	-25.1	36.06	54	-17.94	-	-	312	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

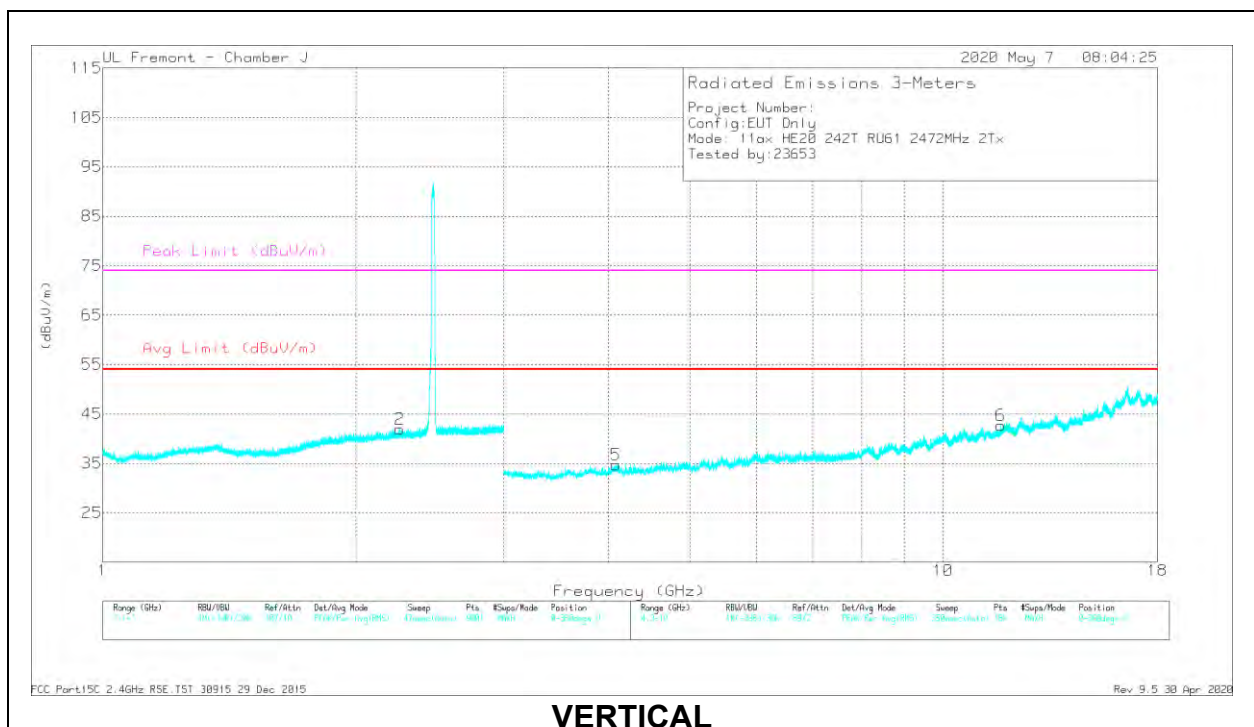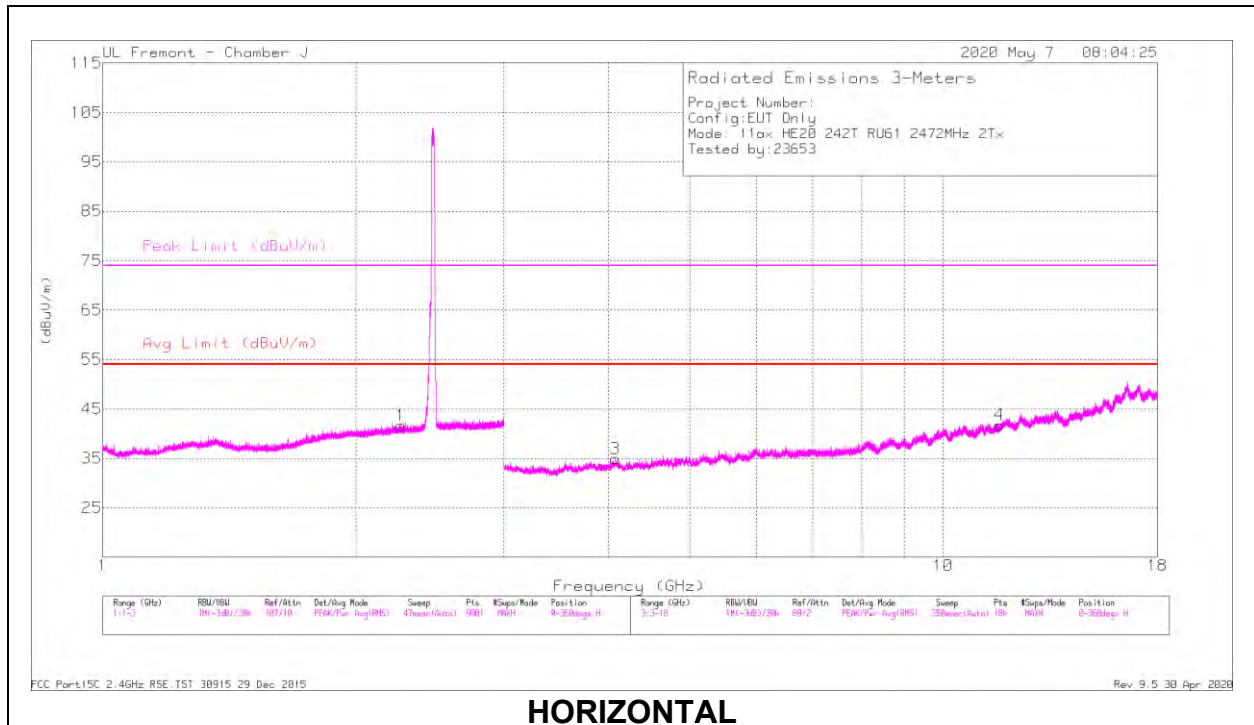

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.26131	42.68	PK2	31.7	-25.6	48.78	-	-	74	-25.22	171	188	H
	* 2.26439	32.7	MAv1	31.7	-25.6	38.8	54	-15.2	-	-	171	188	H
2	* 2.25697	42.88	PK2	31.7	-25.6	48.98	-	-	74	-25.02	354	183	V
	* 2.25852	32.6	MAv1	31.7	-25.6	38.7	54	-15.3	-	-	354	183	V
3	* 4.07056	39.47	PK2	33.7	-31.5	41.67	-	-	74	-32.33	284	253	H
	* 4.07056	29.47	MAv1	33.7	-31.5	31.67	54	-22.33	-	-	284	253	H
4	* 11.68257	33.36	PK2	38.3	-22.3	49.36	-	-	74	-24.64	167	189	H
	* 11.68169	24.04	MAv1	38.3	-22.3	40.04	54	-13.96	-	-	167	189	H
5	* 4.08119	39.59	PK2	33.6	-31.3	41.89	-	-	74	-32.11	91	212	V
	* 4.08206	29.26	MAv1	33.6	-31.3	31.56	54	-22.44	-	-	91	212	V
6	* 11.71008	33.58	PK2	38.4	-22.3	49.68	-	-	74	-24.32	192	237	V
	* 11.70944	23.76	MAv1	38.4	-22.3	39.86	54	-14.14	-	-	192	237	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 1 GHz

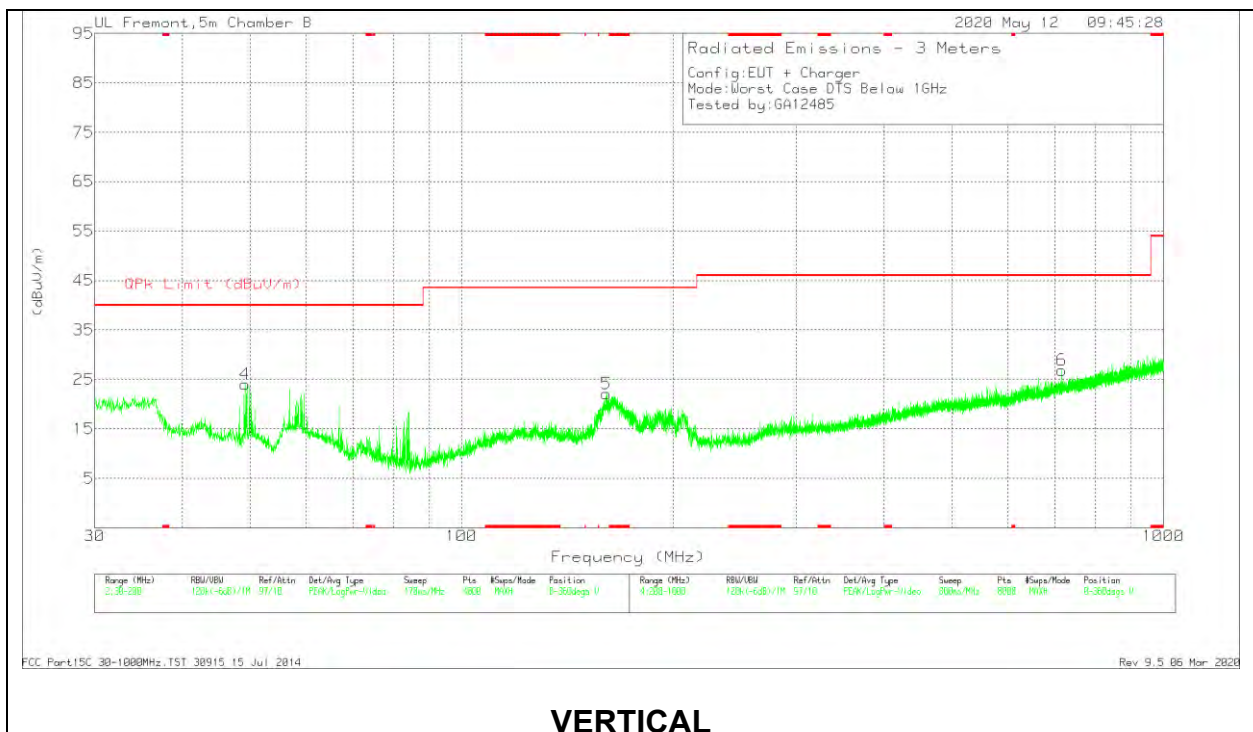
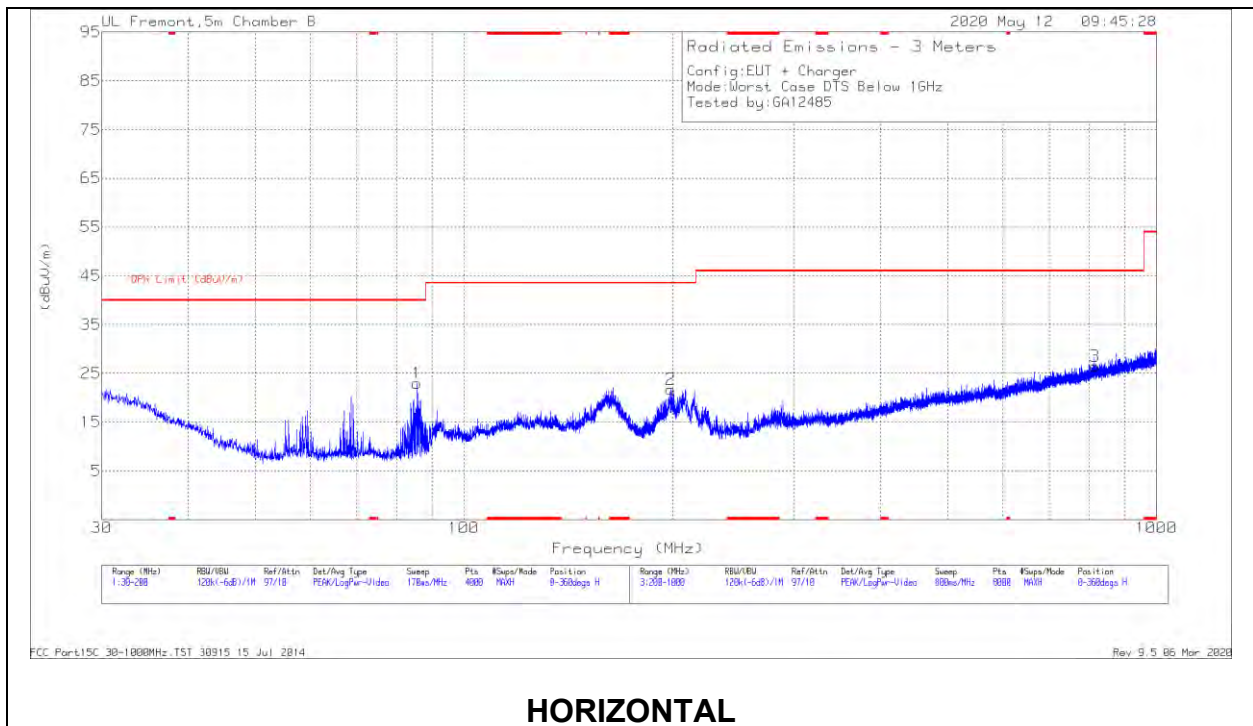


Below 1GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	49.1725	43.1	Pk	12.1	-31.2	24	40	-16	0-360	101	V
1	85.6044	42.45	Pk	11.3	-30.8	22.95	40	-17.05	0-360	300	H
5	160.8489	35.96	Pk	16.3	-30.2	22.06	43.52	-21.46	0-360	101	V
2	198.9812	35.01	Pk	16.8	-30.1	21.71	43.52	-21.81	0-360	101	H
6	716.9672	30.6	Pk	24.4	-28.2	26.8	46.02	-19.22	0-360	100	V
3	814.7799	28.67	Pk	25.5	-27.7	26.47	46.02	-19.55	0-360	299	H

Pk - Peak detector

10.3. WORST CASE 18-26 GHz

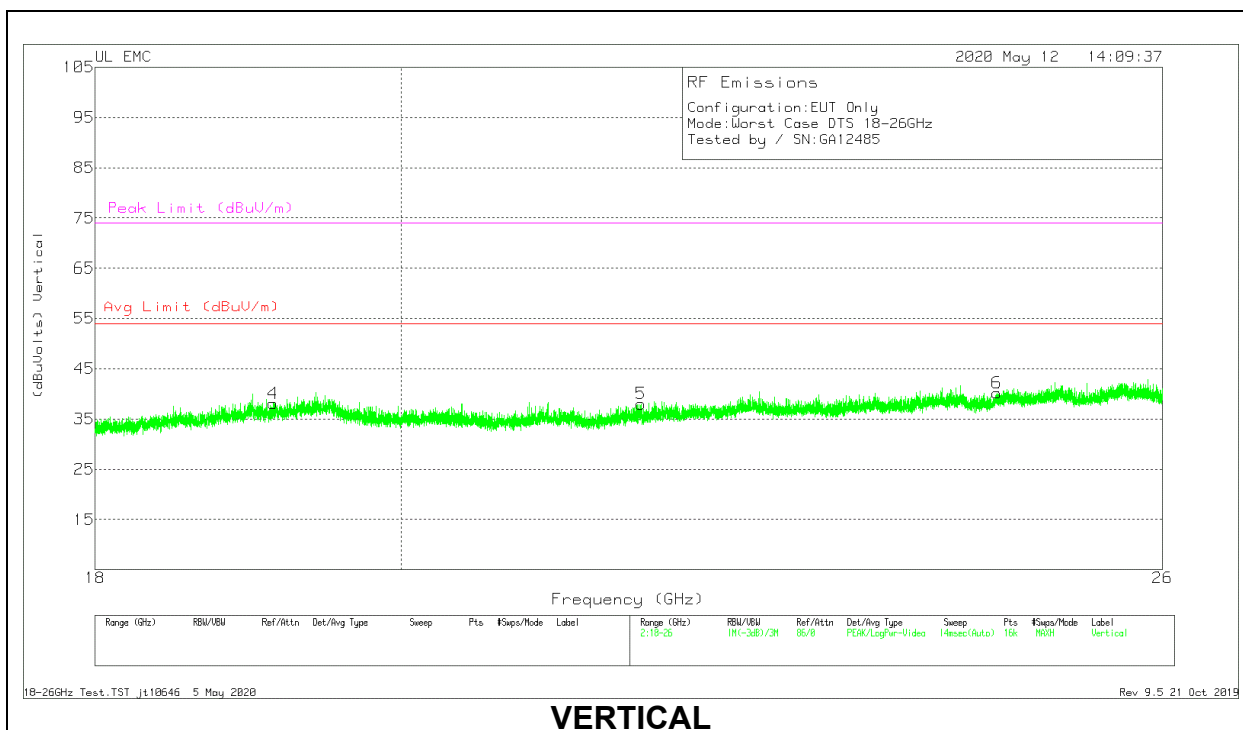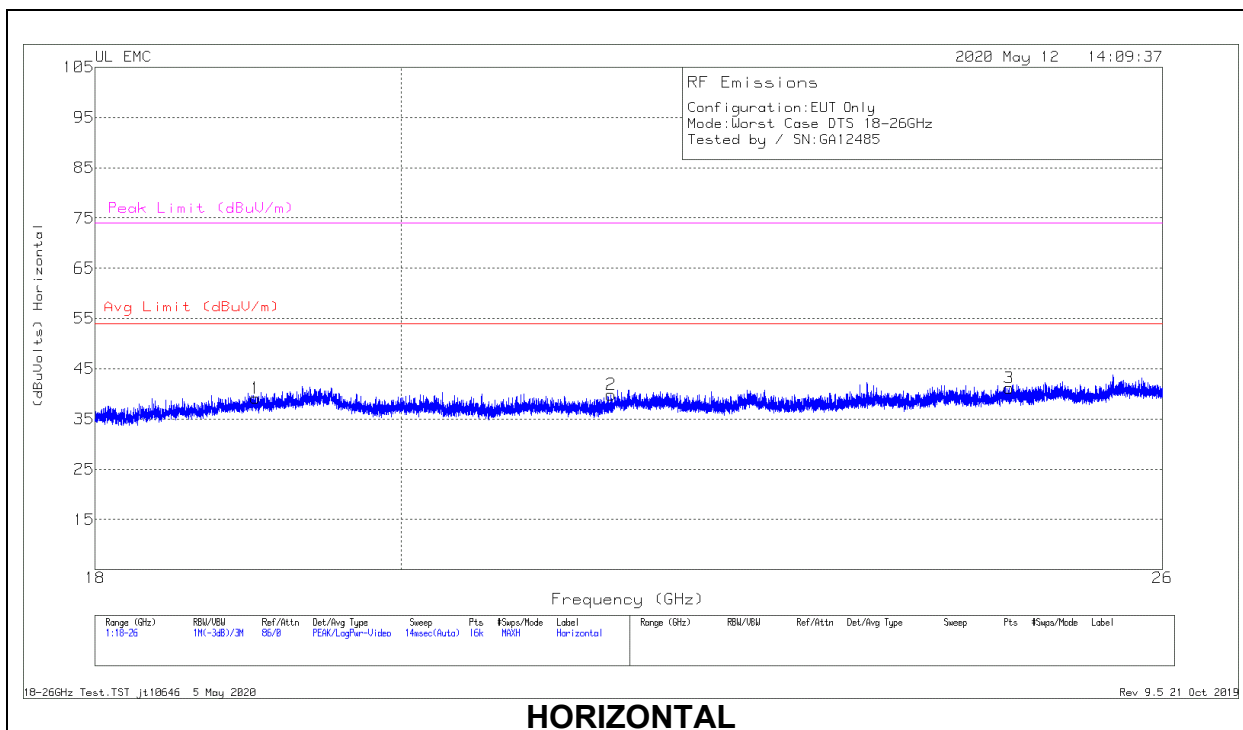

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T125 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	19.02394	35.94	Pk	32.7	-20	-9.5	39.14	54	-14.86	74	-34.86
2	21.50078	37.22	Pk	33.2	-21.1	-9.5	39.82	54	-14.18	74	-34.18
3	24.66159	35.58	Pk	34.1	-19	-9.5	41.18	54	-12.82	74	-32.82
4	19.13793	34.61	Pk	32.7	-19.7	-9.5	38.11	54	-15.89	74	-35.89
5	21.72377	35.01	Pk	33.2	-20.7	-9.5	38.01	54	-15.99	74	-35.99
6	24.55859	34.57	Pk	34.1	-19	-9.5	40.17	54	-13.83	74	-33.83

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

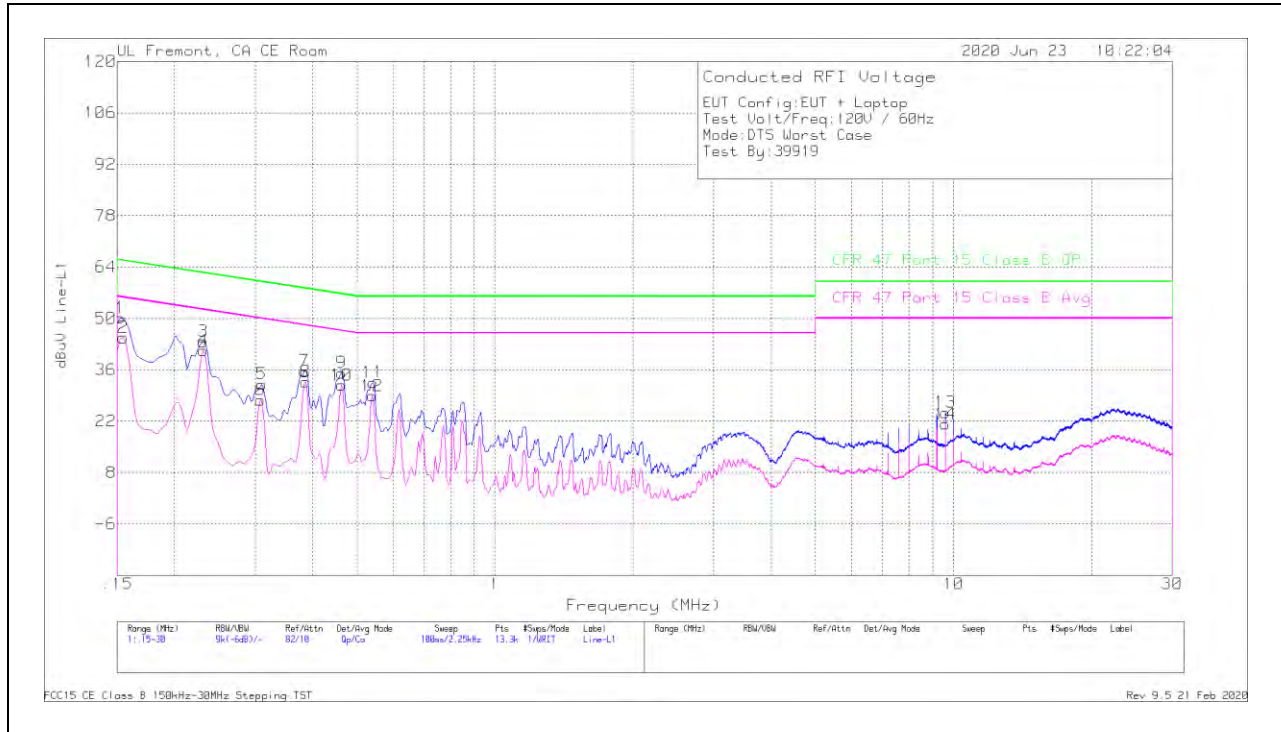

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)M argin (dB)
1	.15225	40.06	Qp	.1	0	10	50.16	65.88	-15.72	-	-
2	.1545	34.68	Ca	.1	0	10	44.78	-	-	55.75	-10.97
3	.231	33.75	Qp	0	0	10	43.75	62.41	-18.66	-	-
4	.231	31.23	Ca	0	0	10	41.23	-	-	52.41	-11.18
5	.30975	22.08	Qp	0	0	10	32.08	59.98	-27.9	-	-
6	.3075	17.8	Ca	0	0	10	27.8	-	-	50.04	-22.24
7	.384	25.61	Qp	0	0	10	35.61	58.19	-22.58	-	-
8	.38625	22.71	Ca	0	0	10	32.71	-	-	48.14	-15.43
9	.46275	25.16	Qp	0	0	10	35.16	56.64	-21.48	-	-
10	.46275	21.81	Ca	0	0	10	31.81	-	-	46.64	-14.83
11	.5415	22.6	Qp	0	0	10	32.6	56	-23.4	-	-
12	.53925	18.88	Ca	0	0	10	28.88	-	-	46	-17.12
13	9.59775	14.07	Qp	0	.2	10.1	24.37	60	-35.63	-	-
14	9.59775	10.92	Ca	0	.2	10.1	21.22	-	-	50	-28.78

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

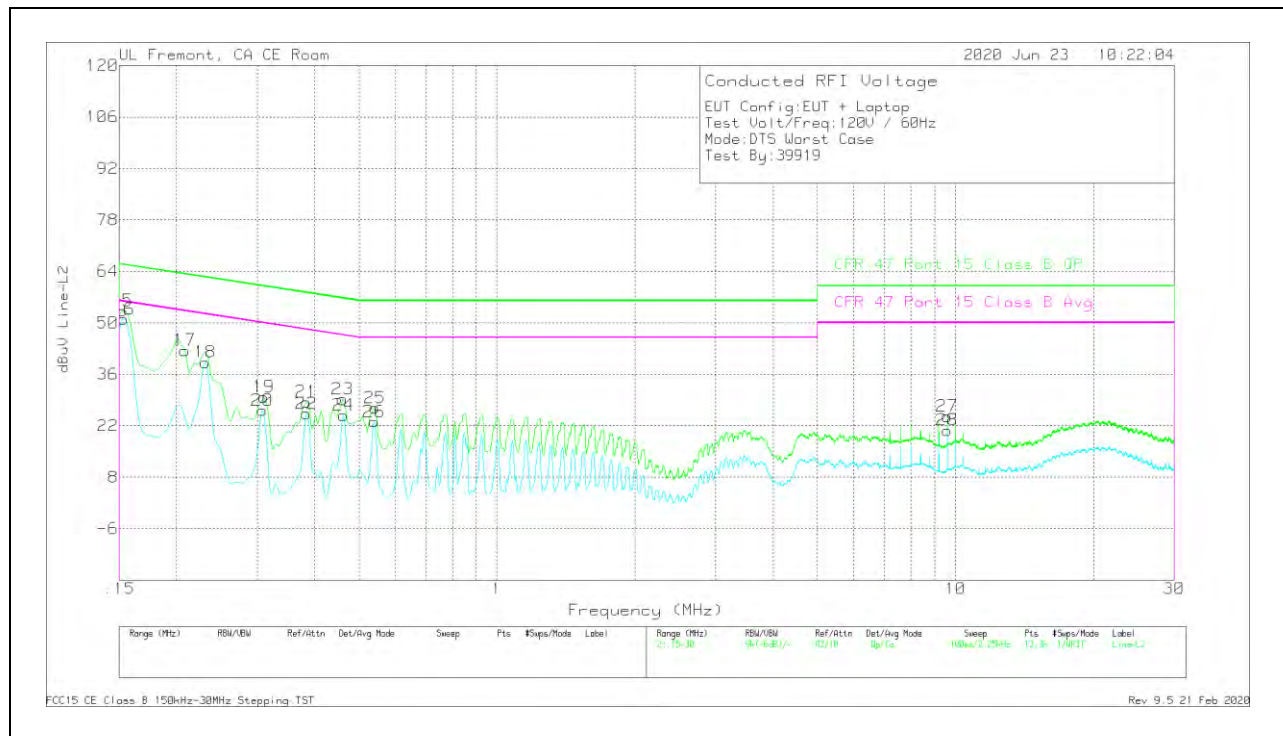


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)M argin (dB)
15	.15225	43.26	Qp	0	0	10	53.26	65.88	-12.62	-	-
16	.15338	40.99	Ca	0	0	10	50.99	-	-	55.81	-4.82
17	.2085	32.48	Qp	0	0	10	42.48	63.26	-20.78	-	-
18	.231	29.28	Ca	0	0	10	39.28	-	-	52.41	-13.13
19	.30975	19.83	Qp	0	0	10	29.83	59.98	-30.15	-	-
20	.3075	16.16	Ca	0	0	10	26.16	-	-	50.04	-23.88
21	.384	18.47	Qp	0	0	10	28.47	58.19	-29.72	-	-
22	.384	15.29	Ca	0	0	10	25.29	-	-	48.19	-22.9
23	.4605	19.19	Qp	0	0	10	29.19	56.68	-27.49	-	-
24	.46275	14.87	Ca	0	0	10	24.87	-	-	46.64	-21.77
25	.5415	16.86	Qp	0	0	10	26.86	56	-29.14	-	-
26	.53925	13.09	Ca	0	0	10	23.09	-	-	46	-22.91
27	9.59325	14.28	Qp	0	.2	10.1	24.58	60	-35.42	-	-
28	9.59325	10.49	Ca	0	.2	10.1	20.79	-	-	50	-29.21

Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS

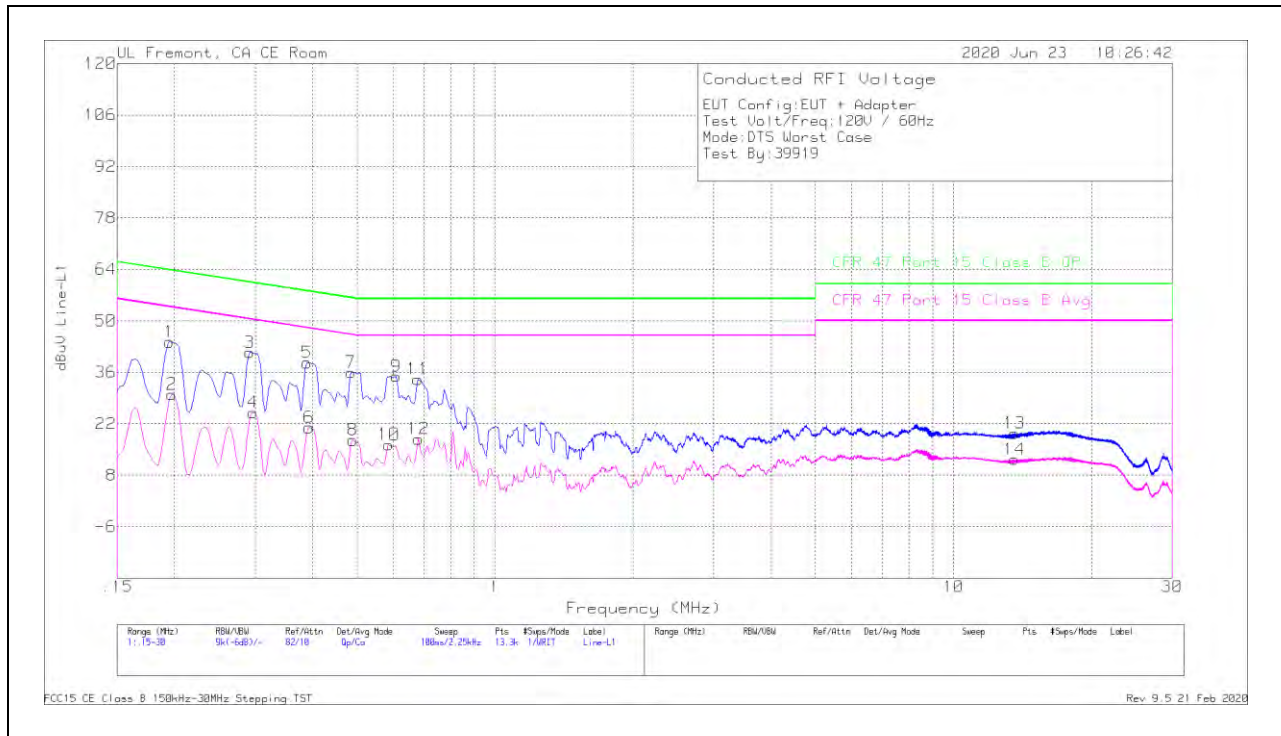


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)M argin (dB)
1	.195	34.28	Qp	0	0	10	44.28	63.82	-19.54	-	-
2	.19725	19.97	Ca	0	0	10	29.97	-	-	53.73	-23.76
3	.29175	31.42	Qp	0	0	10	41.42	60.47	-19.05	-	-
4	.29625	15.07	Ca	0	0	10	25.07	-	-	50.35	-25.28
5	.3885	28.6	Qp	0	0	10	38.6	58.1	-19.5	-	-
6	.393	10.99	Ca	0	0	10	20.99	-	-	48	-27.01
7	.48525	25.95	Qp	0	0	10	35.95	56.25	-20.3	-	-
8	.48975	7.57	Ca	0	0	10	17.57	-	-	46.17	-28.6
9	.609	24.88	Qp	0	0	10	34.88	56	-21.12	-	-
10	.5865	6.31	Ca	0	0	10	16.31	-	-	46	-29.69
11	.67875	24.14	Qp	0	0	10	34.14	56	-21.86	-	-
12	.681	7.87	Ca	0	0	10	17.87	-	-	46	-28.13
*13	13.57575	9.01	Qp	.1	.2	10.1	19.41	60	-40.59	-	-
*14	13.57575	1.89	Ca	.1	.2	10.1	12.29	-	-	50	-37.71

Qp - Quasi-Peak detector

Ca - CISPR average detection

*Indicates UL RFID signal. Not from device

LINE 2 RESULTS

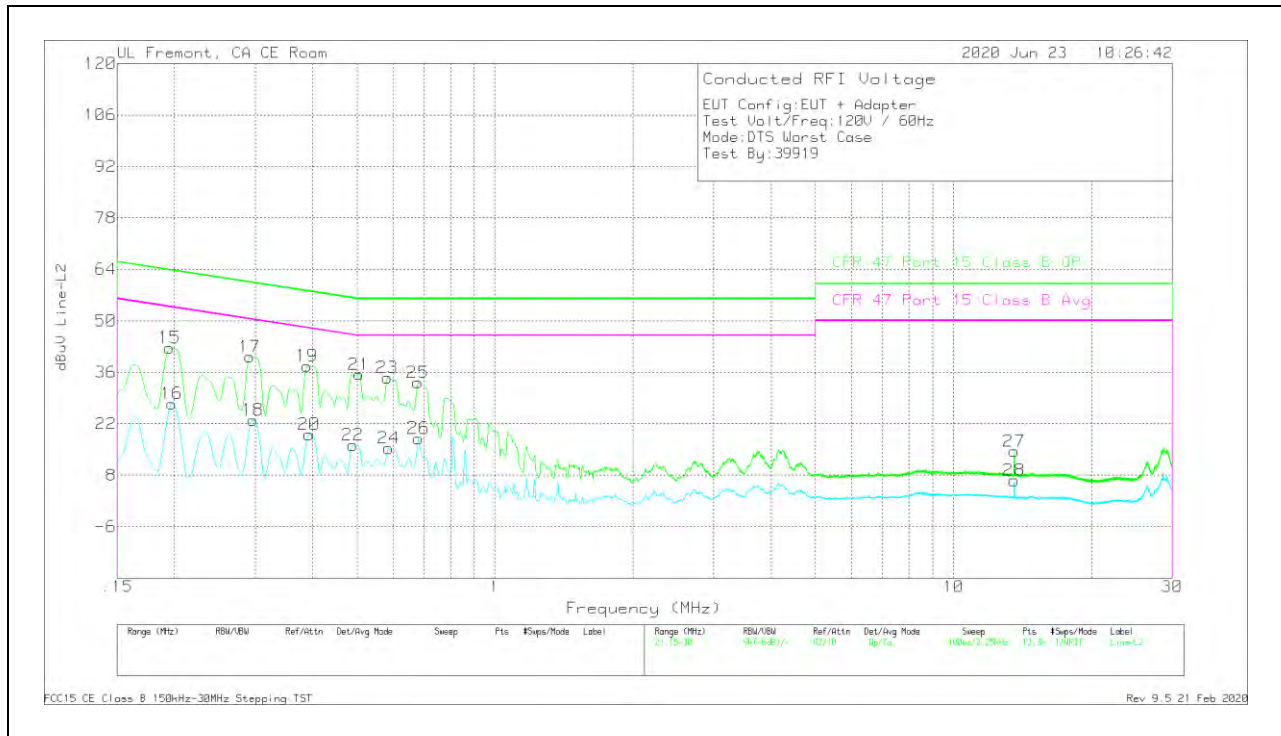

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)M argin (dB)
15	.195	32.67	Qp	0	0	10	42.67	63.82	-21.15	-	-
16	.19725	17.45	Ca	0	0	10	27.45	-	-	53.73	-26.28
17	.29175	30.21	Qp	0	0	10	40.21	60.47	-20.26	-	-
18	.29625	12.97	Ca	0	0	10	22.97	-	-	50.35	-27.38
19	.3885	27.69	Qp	0	0	10	37.69	58.1	-20.41	-	-
20	.393	9.11	Ca	0	0	10	19.11	-	-	48	-28.89
21	.5055	25.38	Qp	0	0	10	35.38	56	-20.62	-	-
22	.48975	6.18	Ca	0	0	10	16.18	-	-	46.17	-29.99
23	.582	24.52	Qp	0	0	10	34.52	56	-21.48	-	-
24	.5865	5.33	Ca	0	0	10	15.33	-	-	46	-30.67
25	.67875	23.18	Qp	0	0	10	33.18	56	-22.82	-	-
26	.681	8	Ca	0	0	10	18	-	-	46	-28
*27	13.56	4.13	Qp	.1	.2	10.1	14.53	60	-45.47	-	-
*28	13.56	-3.81	Ca	.1	.2	10.1	6.59	-	-	50	-43.41

Qp - Quasi-Peak detector

Ca - CISPR average detection

*Indicates UL RFID signal. Not from device

12. SETUP PHOTOS

Please refer to 13179110-EP1V1 for setup photos

END OF TEST REPORT