


1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

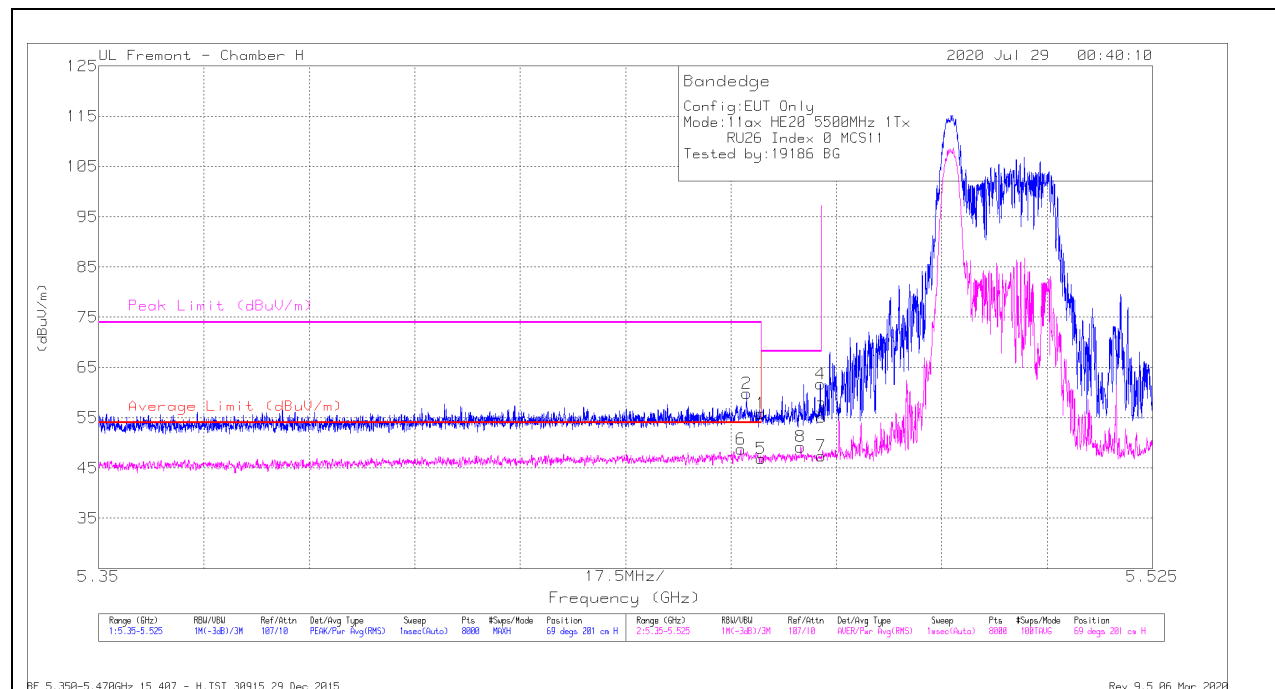


Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb1Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dega)	Height (cm)	Polarity
1	* 5.45998	41.59	Pk	35.2	-20.9	55.89	-	-	74	-18.11	69	201	H
2	* 5.45762	45.45	Pk	35.3	-20.9	59.85	-	-	74	-14.15	69	201	H
5	* 5.45998	32.54	RMS	35.2	-20.9	46.84	54	-7.16	-	-	69	201	H
6	* 5.45666	34.41	RMS	35.3	-20.9	48.81	54	-5.19	-	-	69	201	H
8	5.46659	34.9	RMS	35.2	-20.9	49.2	-	-	-	-	69	201	H
4	5.46985	47.46	Pk	35.3	-21	61.76	-	-	68.2	-6.44	69	201	H
3	5.46998	40.82	Pk	35.3	-21	55.12	-	-	68.2	-13.08	69	201	H
7	5.46998	33.05	RMS	35.3	-21	47.35	-	-	-	-	69	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

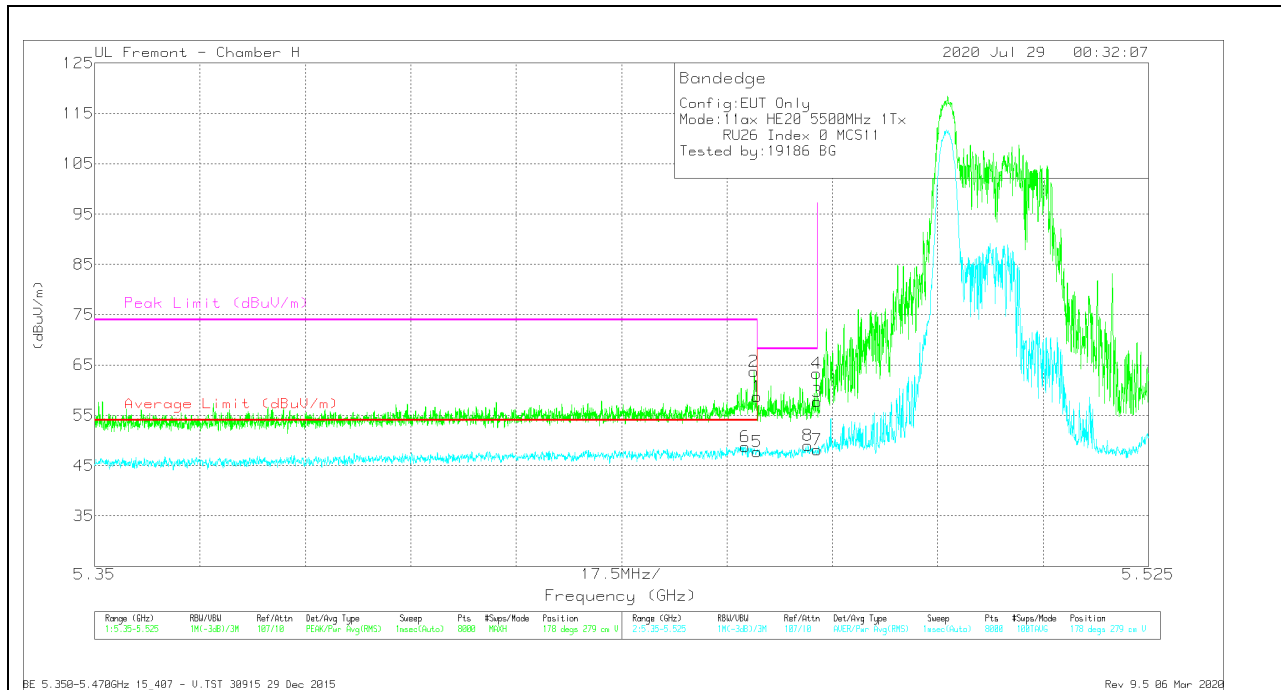

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.42	Pk	35.2	-20.9	58.72	-	-	74	-15.28	178	279	V
2	* 5.4595	49.36	Pk	35.2	-20.9	63.66	-	-	74	-10.34	178	279	V
5	* 5.45998	33.48	RMS	35.2	-20.9	47.78	54	-6.22	-	-	178	279	V
6	* 5.45799	34.39	RMS	35.3	-20.9	48.79	54	-5.21	-	-	178	279	V
8	5.46847	34.68	RMS	35.3	-21	48.98	-	-	-	-	178	279	V
4	5.46985	49.08	Pk	35.3	-21	63.38	-	-	68.2	-4.82	178	279	V
3	5.46998	43.44	Pk	35.3	-21	57.74	-	-	68.2	-10.46	178	279	V
7	5.46998	33.87	RMS	35.3	-21	48.17	-	-	-	-	178	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

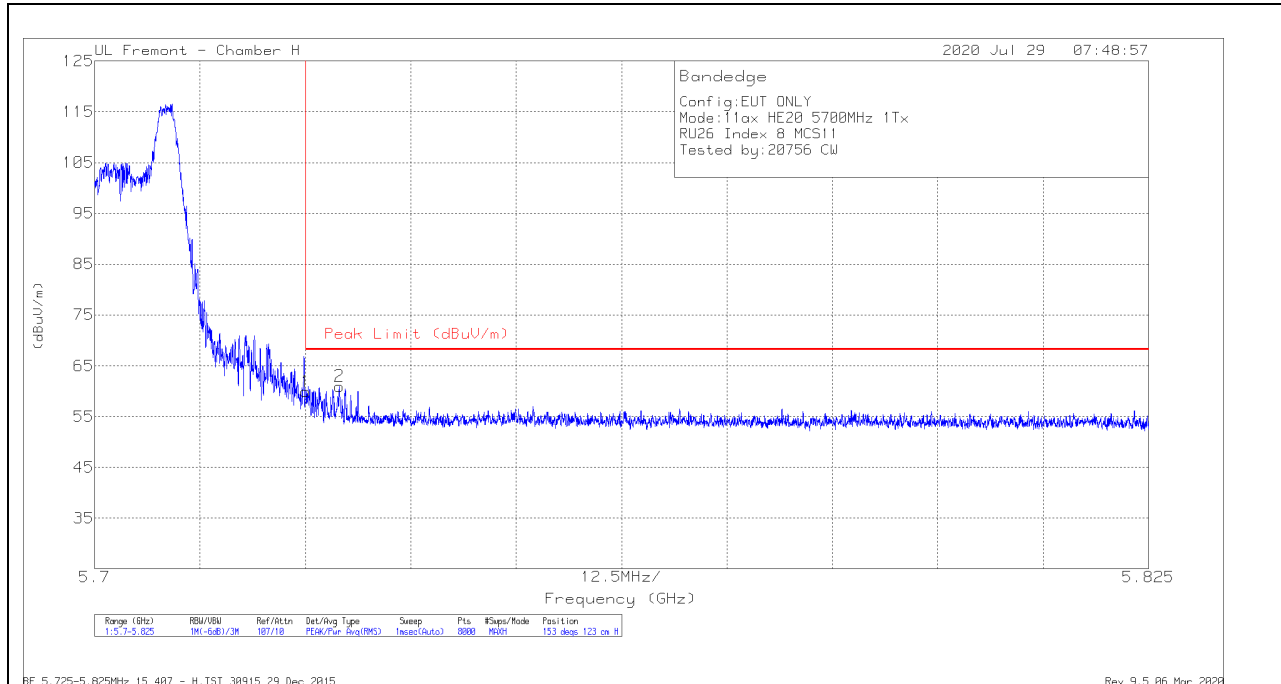

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.04	Pk	35	-21.1	59.94	68.2	-8.26	153	123	H
2	5.72902	47.19	Pk	34.9	-21.1	60.99	68.2	-7.21	153	123	H

Pk - Peak detector

VERTICAL RESULT

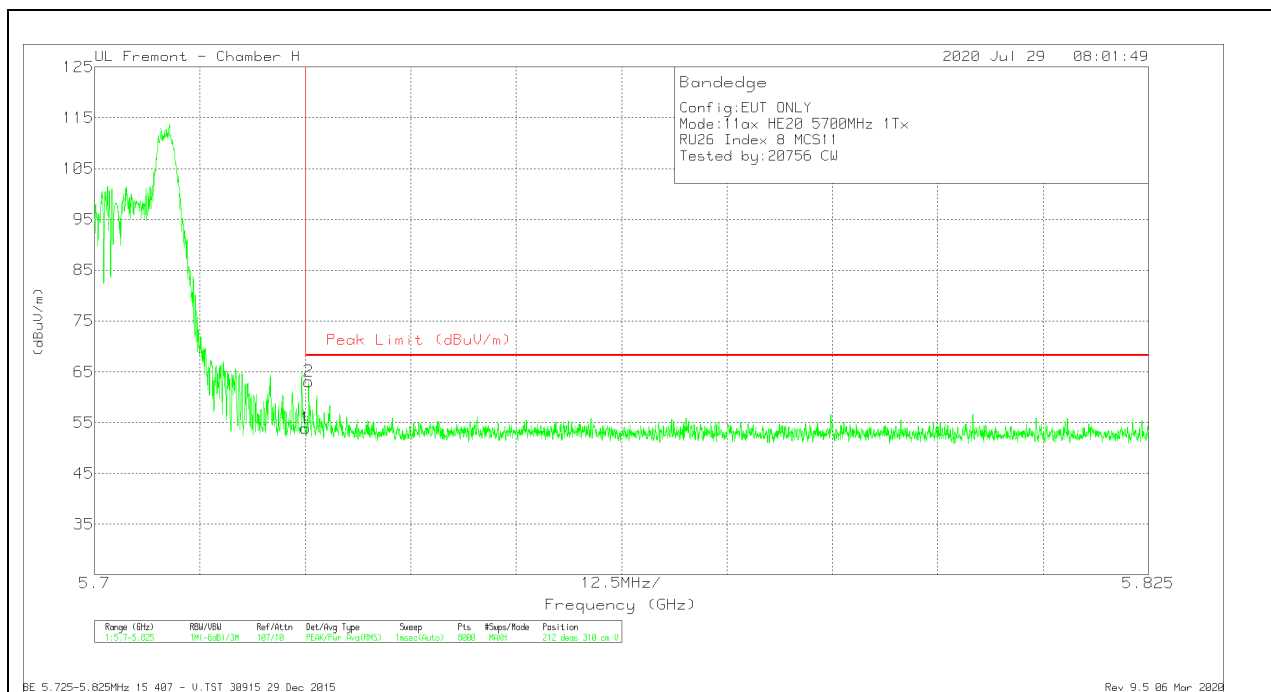


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.05	Pk	35	-21.1	53.95	68.2	-14.25	212	310	V
2	5.72538	49.29	Pk	34.9	-21.1	63.09	68.2	-5.11	212	310	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

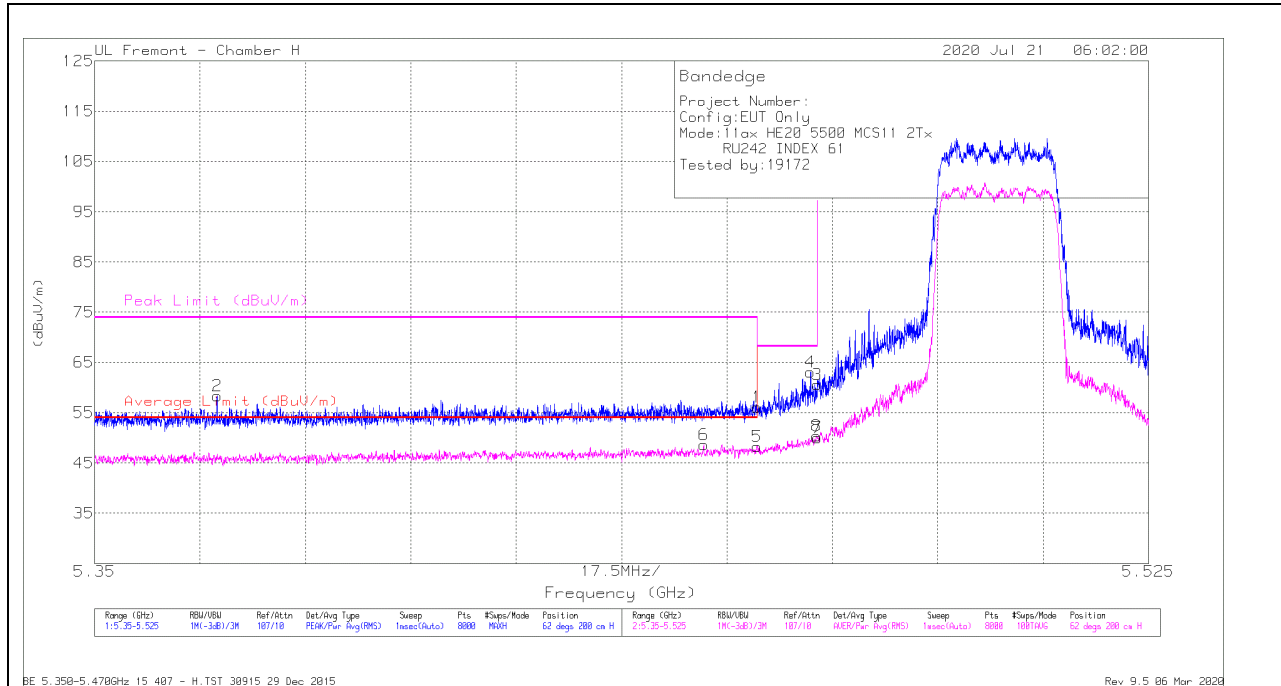


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dBm)	Amp/Cal/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.79	Pk	35.2	-20.9	56.09	-	-	74	-17.91	62	200	H
2	* 5.37032	44.32	Pk	34.9	-20.9	56.32	-	-	74	-15.68	62	200	H
5	* 5.45998	33.85	RMS	35.2	-20.9	48.15	54	-5.85	-	-	62	200	H
6	* 5.45114	34.26	RMS	35.2	-20.9	48.56	54	-5.44	-	-	62	200	H
4	5.46889	48.76	Pk	35.3	-21	63.06	-	-	68.2	-5.14	62	200	H
8	5.46985	36.01	RMS	35.3	-21	50.31	-	-	-	-	62	200	H
3	5.46998	46.27	Pk	35.3	-21	60.57	-	-	68.2	-7.63	62	200	H
7	5.46998	35.57	RMS	35.3	-21	49.87	-	-	-	-	62	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

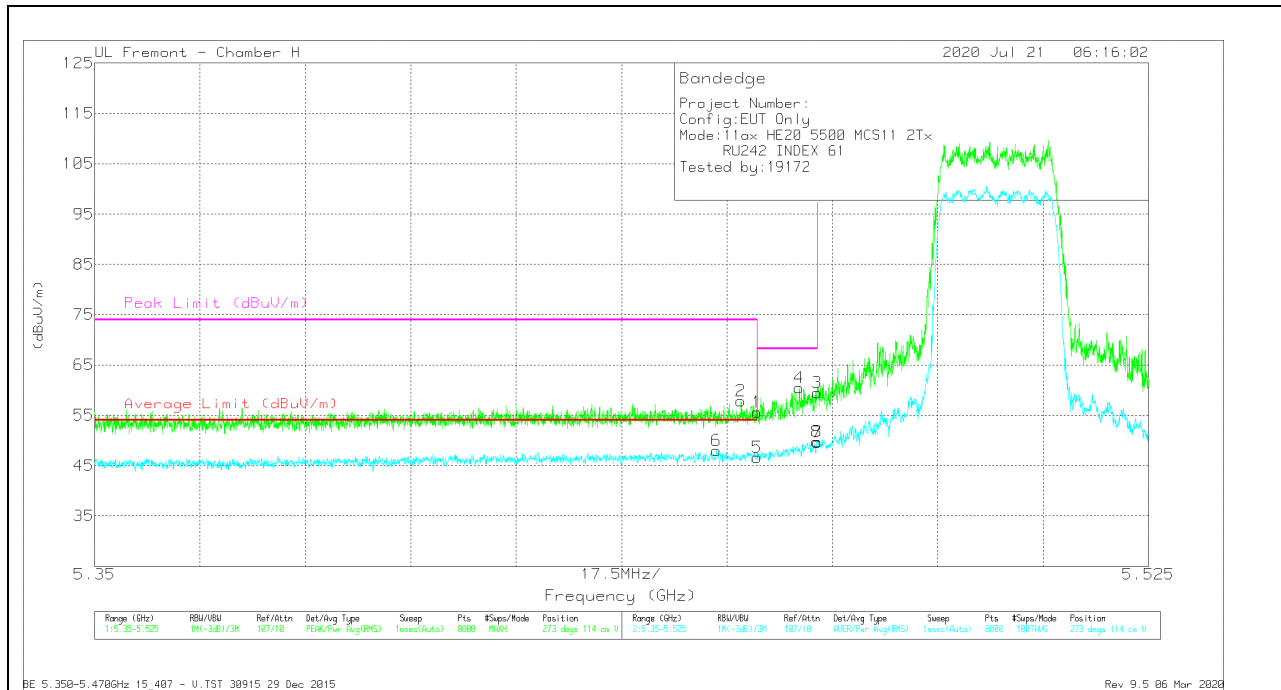


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AUT (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.45998	41.34	Pk	35.2	-20.9	55.64	-	-	74	-18.36	273	114	V
2	* 5.45733	43.42	Pk	35.3	-20.9	57.82	-	-	74	-16.18	273	114	V
5	* 5.45998	32.28	RMS	35.2	-20.9	46.58	54	-7.42	-	-	273	114	V
6	* 5.45329	33.66	RMS	35.2	-20.9	47.96	54	-6.04	-	-	273	114	V
4	5.467	46.05	Pk	35.3	-20.9	60.45	-	-	68.2	-7.75	273	114	V
8	5.46904	35.34	RMS	35.3	-21	49.64	-	-	-	-	273	114	V
3	5.46998	45.18	Pk	35.3	-21	59.48	-	-	68.2	-8.72	273	114	V
7	5.46998	35.19	RMS	35.3	-21	49.49	-	-	-	-	273	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 242 Tones, RU Index 61

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

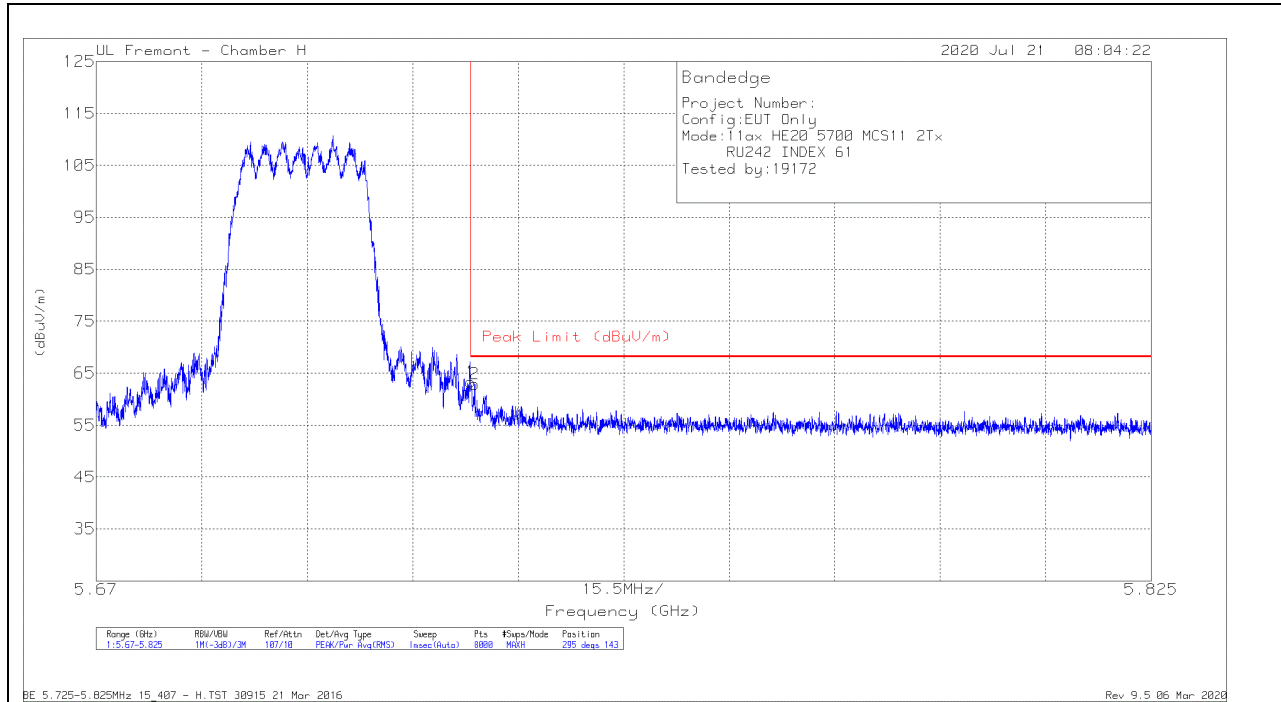

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	49.38	Pk	35	-21.1	0	63.28	68.2	-4.92	295	143	H
2	5.72559	49.1	Pk	34.9	-21.1	0	62.9	68.2	-5.3	295	143	H

Pk - Peak detector



VERTICAL RESULT

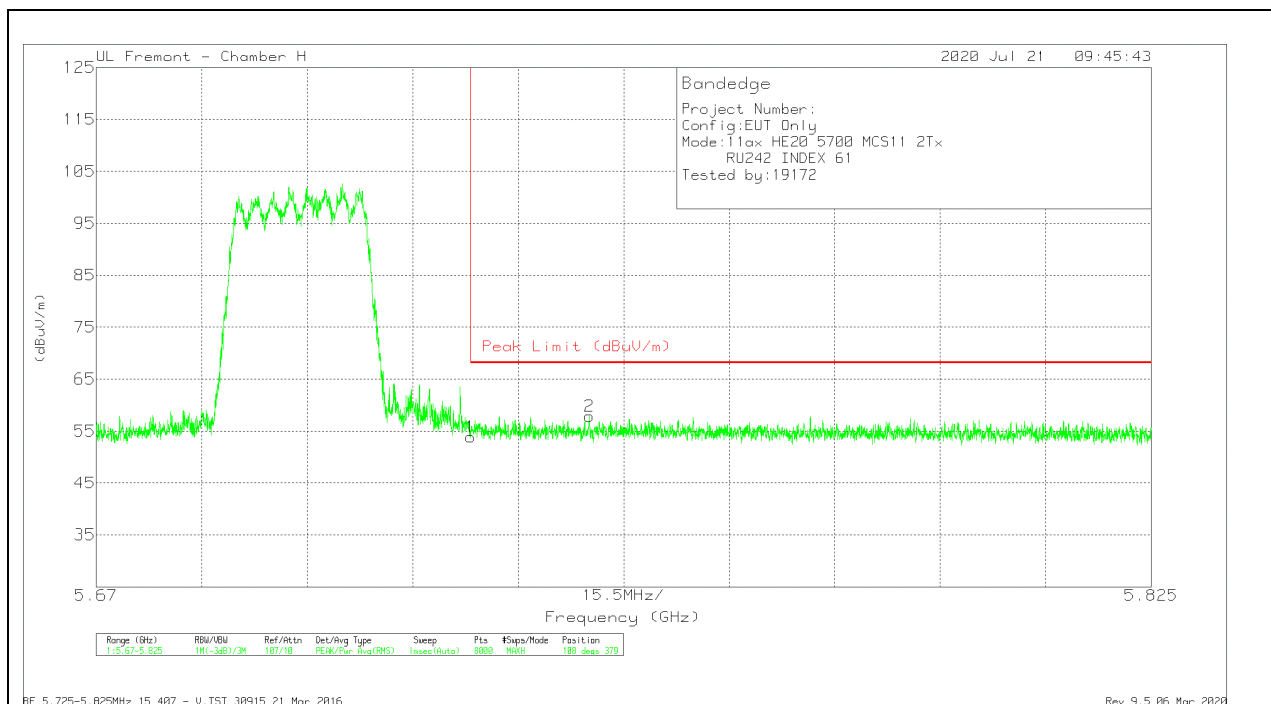

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

242 Tones, RU Index 61 RESULTS

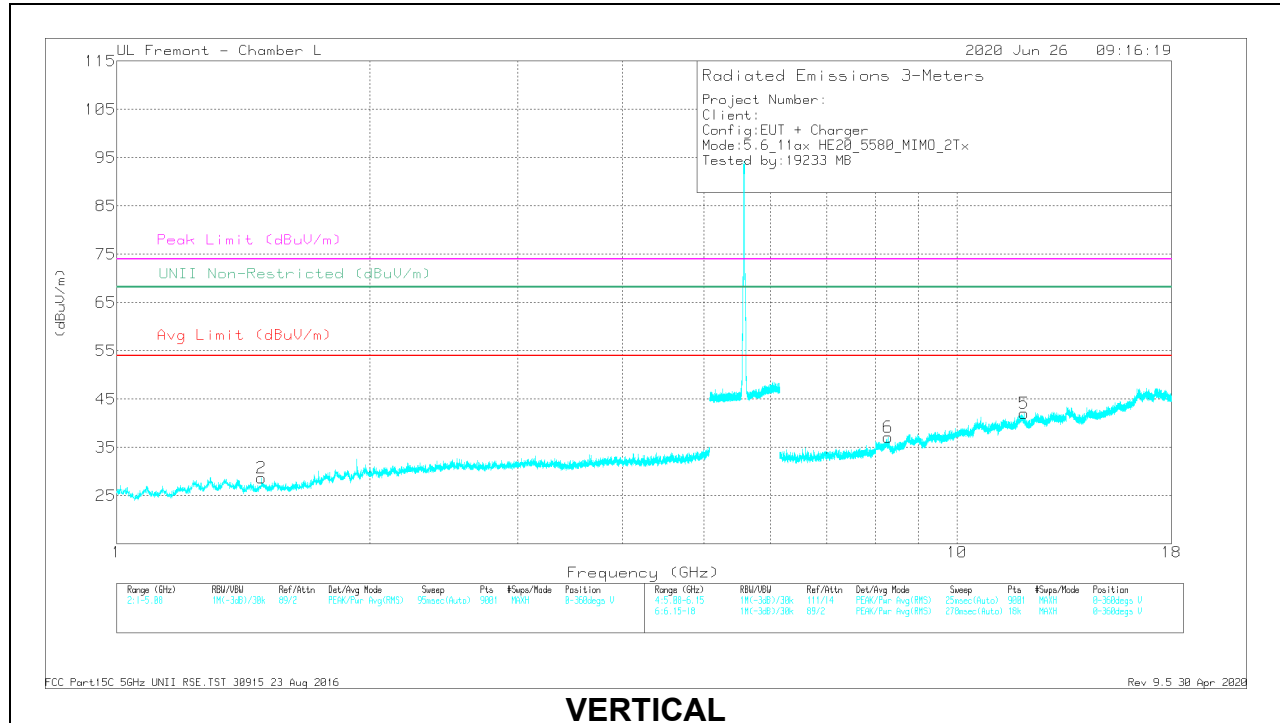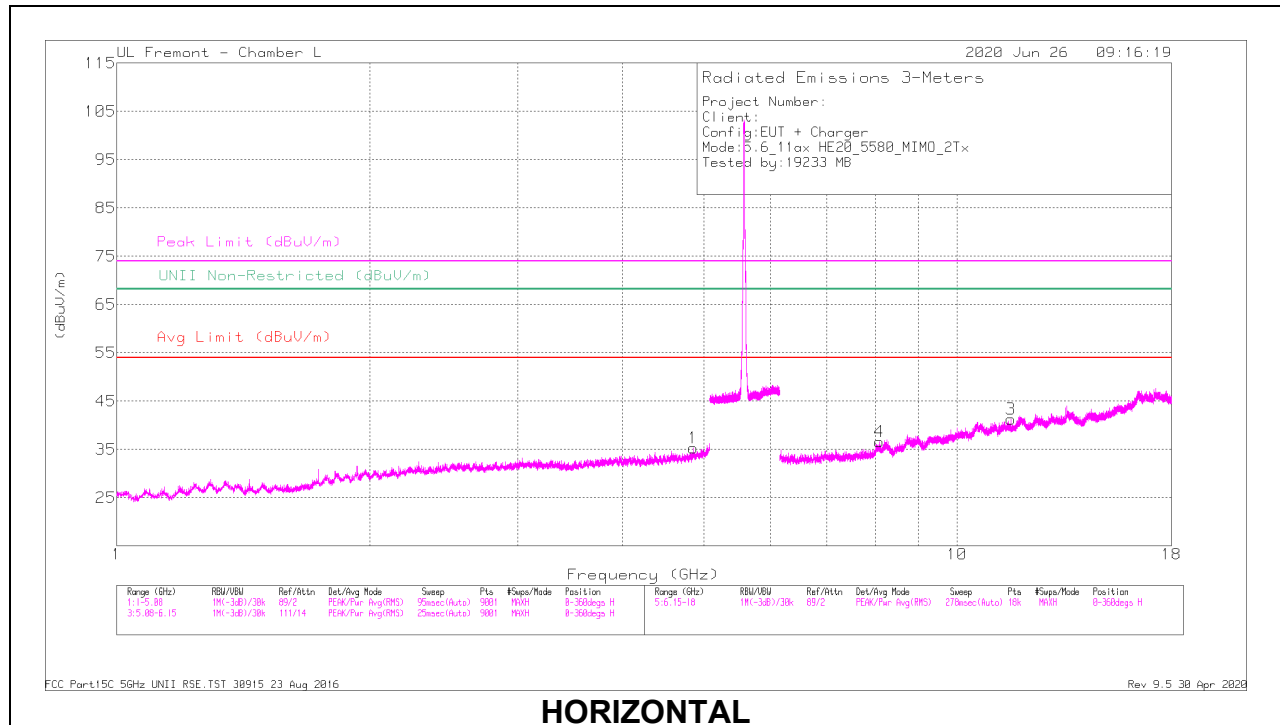

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.8557	37.21	PK-U	34.2	-26.5	44.91	-	-	74	-29.09	-	-	254	361	H
	* 4.85898	25.71	ADR	34.2	-26.4	33.51	54	-20.49	-	-	-	-	254	361	H
2	* 1.48605	40.53	PK-U	28.3	-32.7	36.13	-	-	74	-37.87	-	-	253	352	V
	* 1.48681	30.85	ADR	28.3	-32.7	26.45	54	-27.55	-	-	-	-	253	352	V
3	* 11.60035	29.62	PK-U	38.3	-19.6	48.32	-	-	74	-25.68	-	-	236	302	H
	* 11.59929	19.93	ADR	38.2	-19.6	38.53	54	-15.47	-	-	-	-	236	302	H
4	* 8.08122	33.51	PK-U	35.8	-22.5	46.81	-	-	74	-27.19	-	-	92	355	H
	* 8.08325	22.83	ADR	35.8	-22.5	36.13	54	-17.87	-	-	-	-	92	355	H
5	* 12.01539	31.38	PK-U	38.7	-19.8	50.28	-	-	74	-23.72	-	-	316	362	V
	* 12.01852	21.38	ADR	38.7	-19.8	40.28	54	-13.72	-	-	-	-	316	362	V
6	* 8.27714	31.43	PK-U	35.8	-21.4	45.83	-	-	74	-28.17	-	-	172	346	V
	* 8.27574	21.4	ADR	35.8	-21.4	35.8	54	-18.2	-	-	-	-	172	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

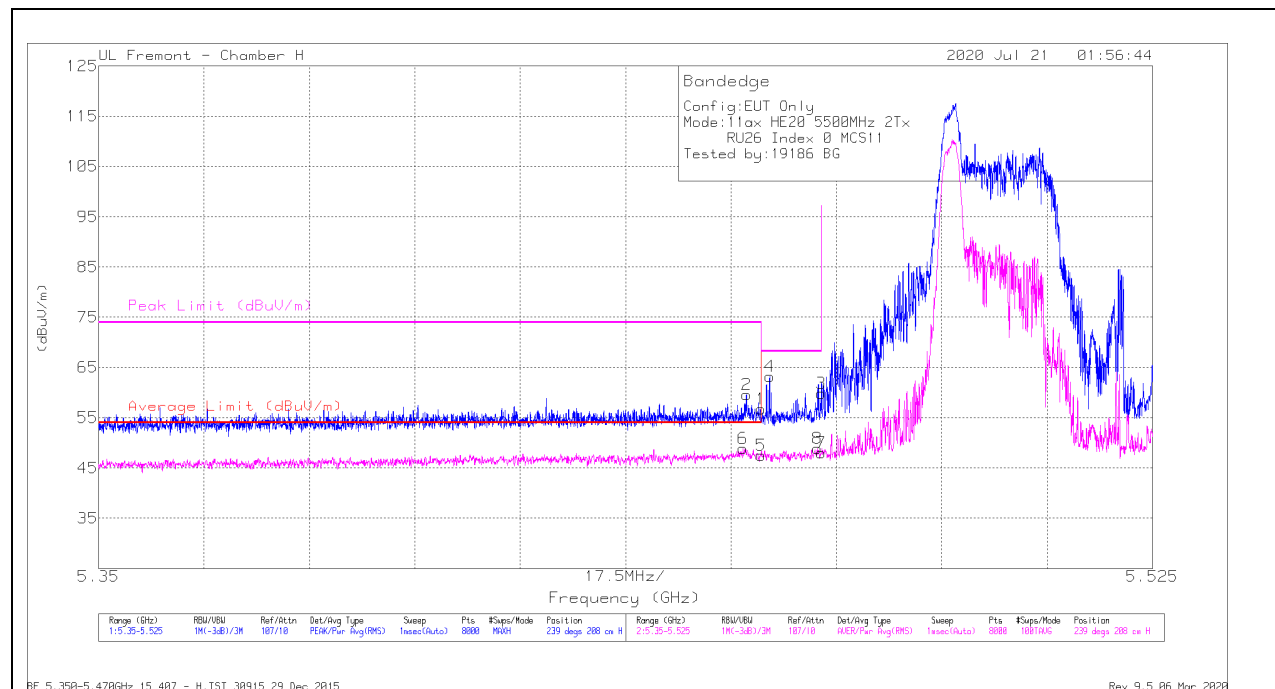

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dBm)	Amp/Cal/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.42	Pk	35.2	-20.9	56.72	-	-	74	-17.28	239	208	H
2	* 5.45757	45.16	Pk	35.3	-20.9	59.56	-	-	74	-14.44	239	208	H
5	* 5.45998	33.09	RMS	35.2	-20.9	47.39	54	-6.61	-	-	239	208	H
6	* 5.45998	34.44	RMS	35.3	-20.9	48.84	54	-5.16	-	-	239	208	H
4	5.46142	48.95	Pk	35.2	-20.9	63.25	-	-	68.2	-4.95	239	208	H
8	5.46934	34.53	RMS	35.3	-21	48.83	-	-	-	-	239	208	H
3	5.46998	45.55	Pk	35.3	-21	59.85	-	-	68.2	-8.35	239	208	H
7	5.46998	33.61	RMS	35.3	-21	47.91	-	-	-	-	239	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

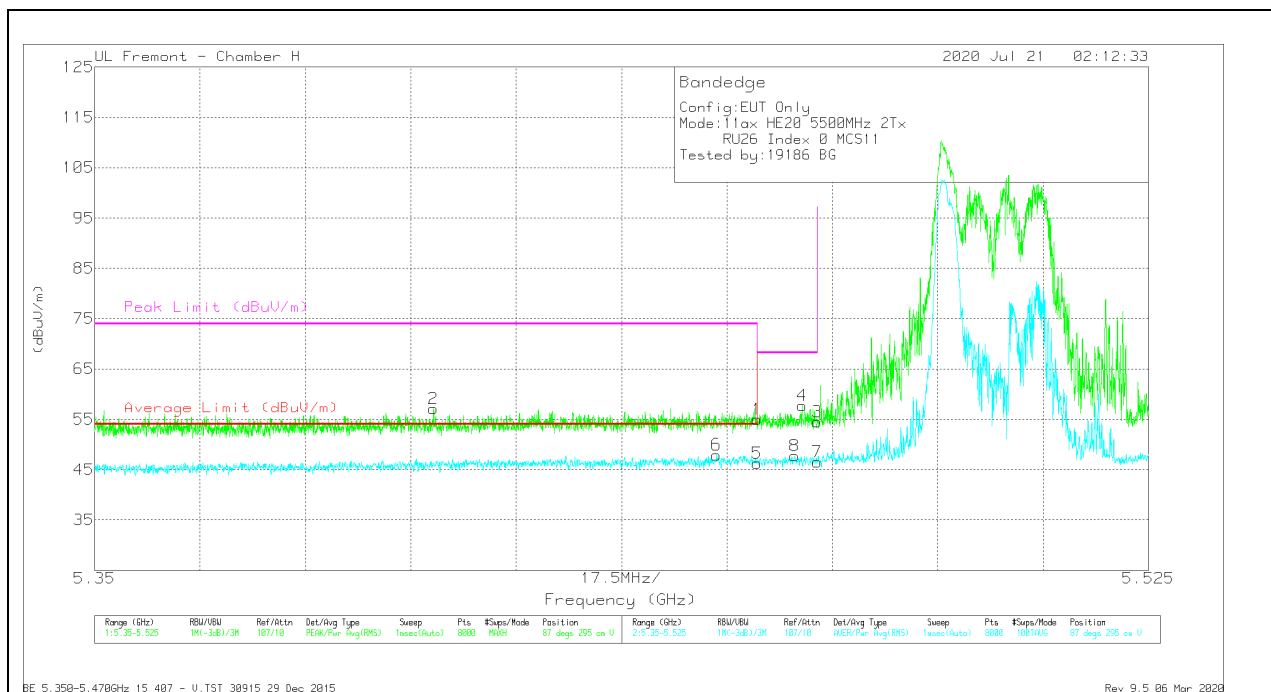


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.45998	40.74	Pk	35.2	-20.9	55.04	-	-	74	-18.96	87	295	V
2	* 5.40629	42.96	Pk	35	-20.8	57.16	-	-	74	-16.84	87	295	V
5	* 5.45998	31.86	RMS	35.2	-20.9	46.16	54	-7.84	-	-	87	295	V
6	* 5.45329	33.56	RMS	35.2	-20.9	47.86	54	-6.14	-	-	87	295	V
8	5.46624	33.34	RMS	35.2	-20.9	47.64	-	-	-	-	87	295	V
4	5.46748	43.36	Pk	35.3	-20.9	57.76	-	-	68.2	-10.44	87	295	V
3	5.46998	40.17	Pk	35.3	-21	54.47	-	-	68.2	-13.73	87	295	V
7	5.46998	32.12	RMS	35.3	-21	46.42	-	-	-	-	87	295	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

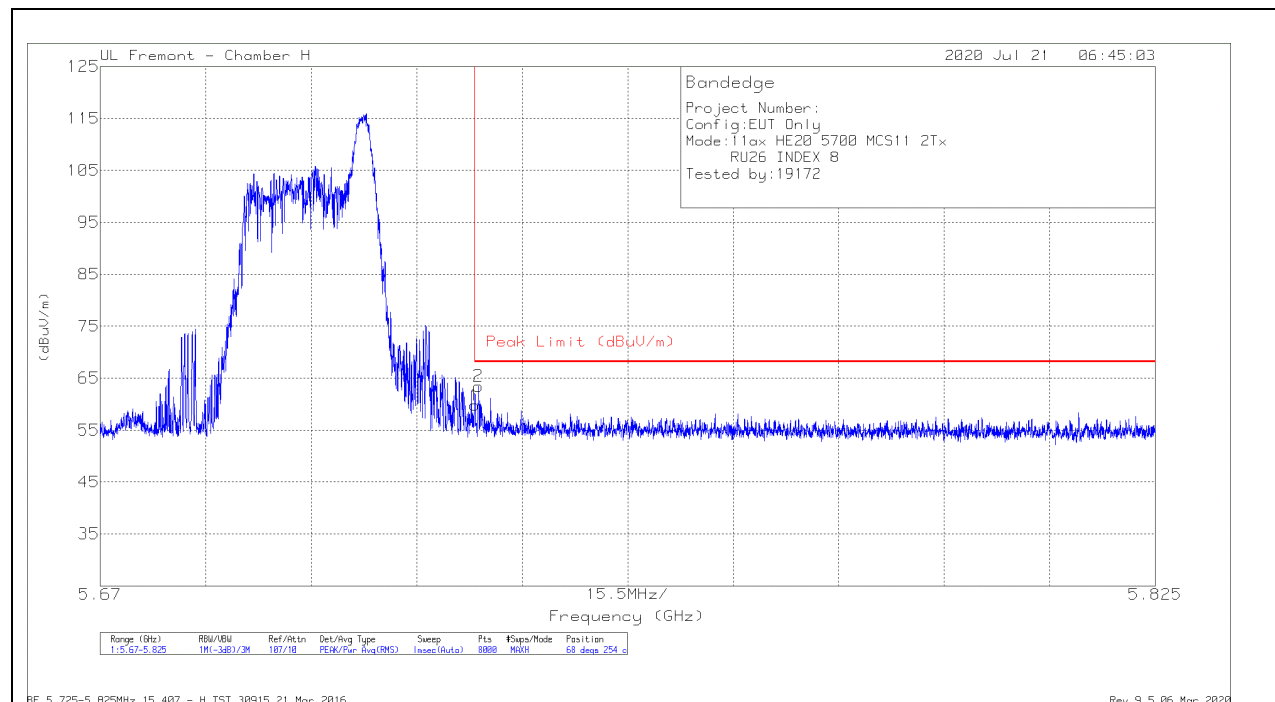

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.9	Pk	35	-21.1	59.8	68.2	-8.4	68	254	H
2	5.72555	49.67	Pk	34.9	-21.1	63.47	68.2	-4.73	68	254	H

Pk - Peak detector

VERTICAL RESULT


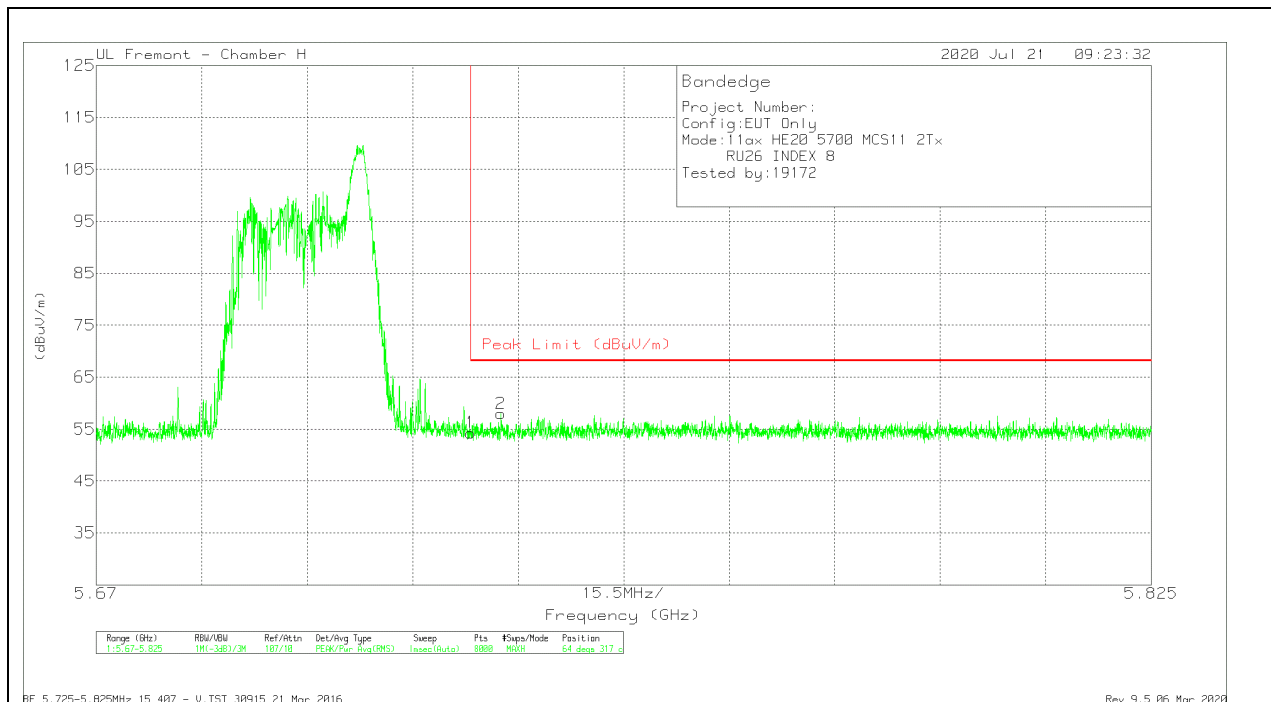


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.39	Pk	35	-21.1	54.29	68.2	-13.91	64	317	V
2	5.72945	44.06	Pk	35	-21.1	57.96	68.2	-10.24	64	317	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

26 Tines, RU Index 8 RESULTS

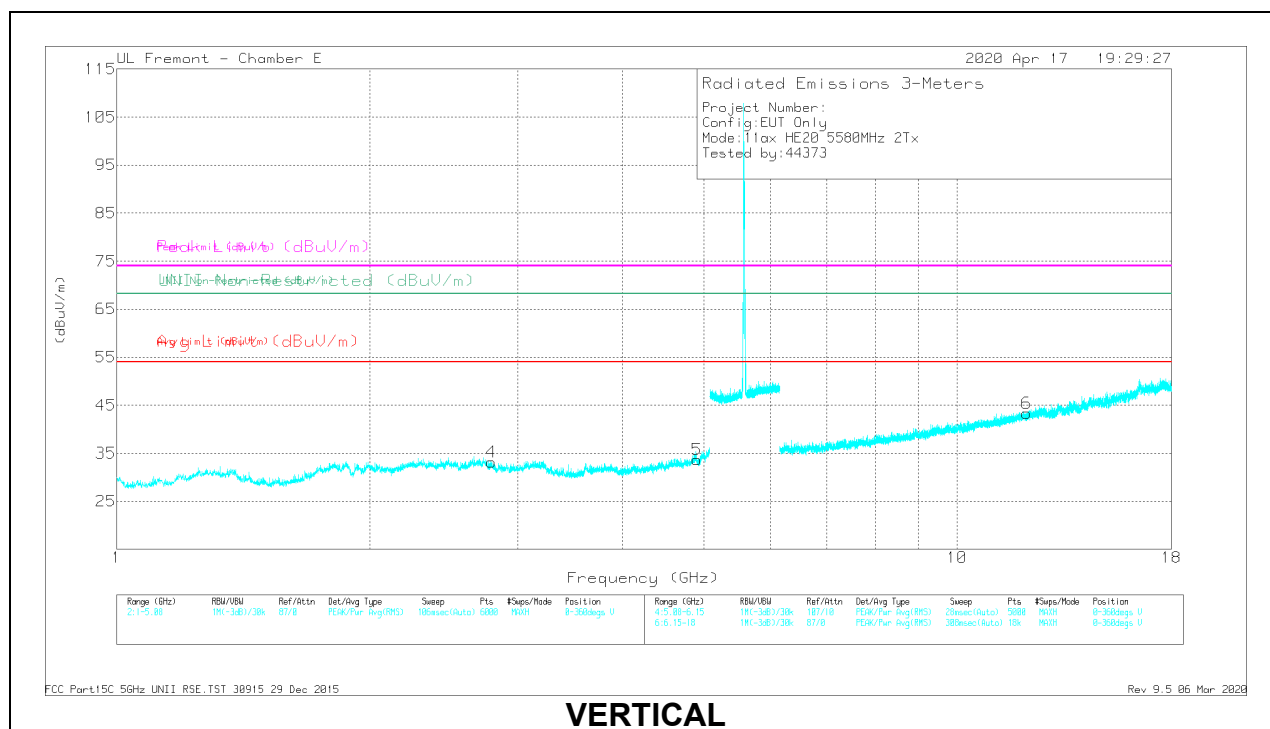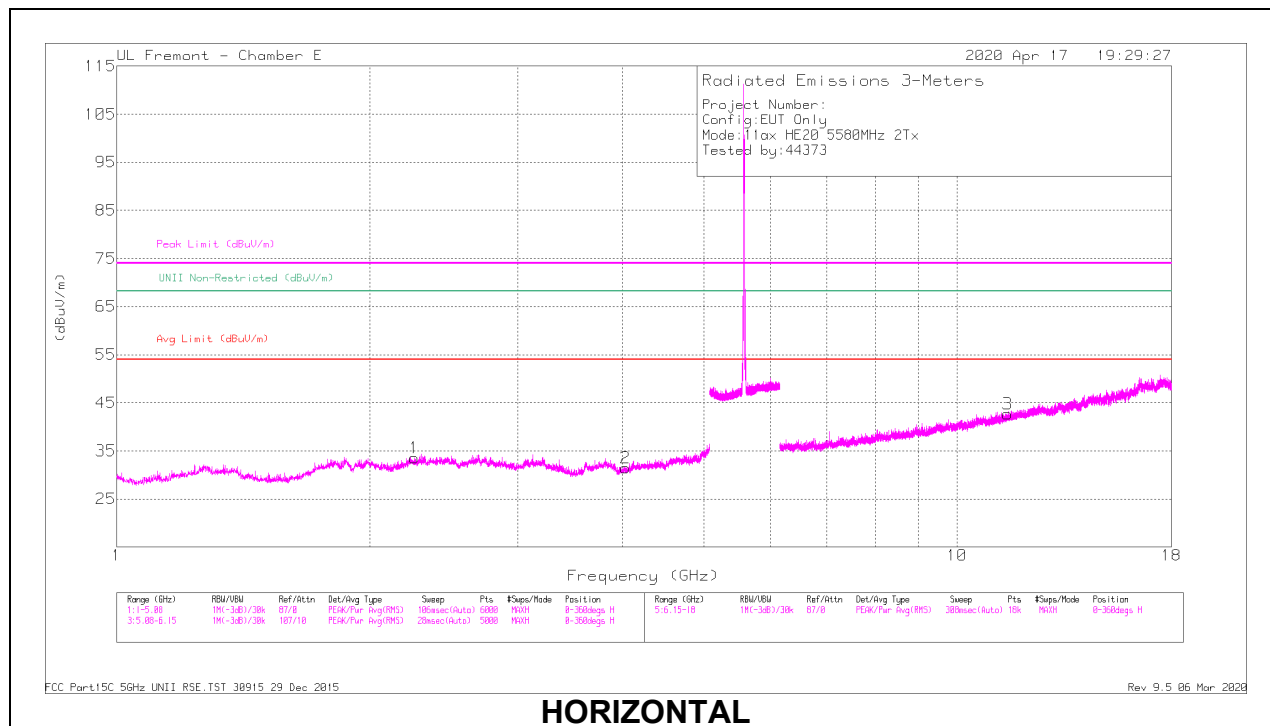

RADIATED EMISSIONS

Mark er	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimu th (Degs)	Heig ht (cm)	Polarit y
1	* 2.26413	44.72	PK-U	31.8	-35.6	40.72	-	-	74	-33.28	360	200	H
	* 2.26073	33.27	ADR	31.8	-35.8	29.27	54	-24.73	-	-	360	200	H
2	* 4.02952	38.65	PK-U	33.5	-33	39.15	-	-	74	-34.85	230	175	H
	* 4.02933	27.35	ADR	33.5	-33	27.85	54	-26.15	-	-	230	175	H
4	* 2.79573	43.64	PK-U	32.6	-35.5	40.74	-	-	74	-33.26	125	101	V
	* 2.79347	31.97	ADR	32.5	-35.5	28.97	54	-25.03	-	-	125	101	V
5	* 4.9036	39.06	PK-U	34.1	-31	42.16	-	-	74	-31.84	55	150	V
	* 4.90429	27.08	ADR	34.1	-31	30.18	54	-23.82	-	-	55	150	V
3	* 11.48501	35.68	PK-U	38	-24.2	49.48	-	-	74	-24.52	234	200	H
	* 11.48775	24.81	ADR	38	-24.2	38.61	54	-15.39	-	-	234	200	H
6	* 12.11569	35.35	PK-U	38.7	-23.6	50.45	-	-	74	-23.55	85	125	V
	* 12.11318	24.3	ADR	38.8	-23.6	39.5	54	-14.5	-	-	85	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

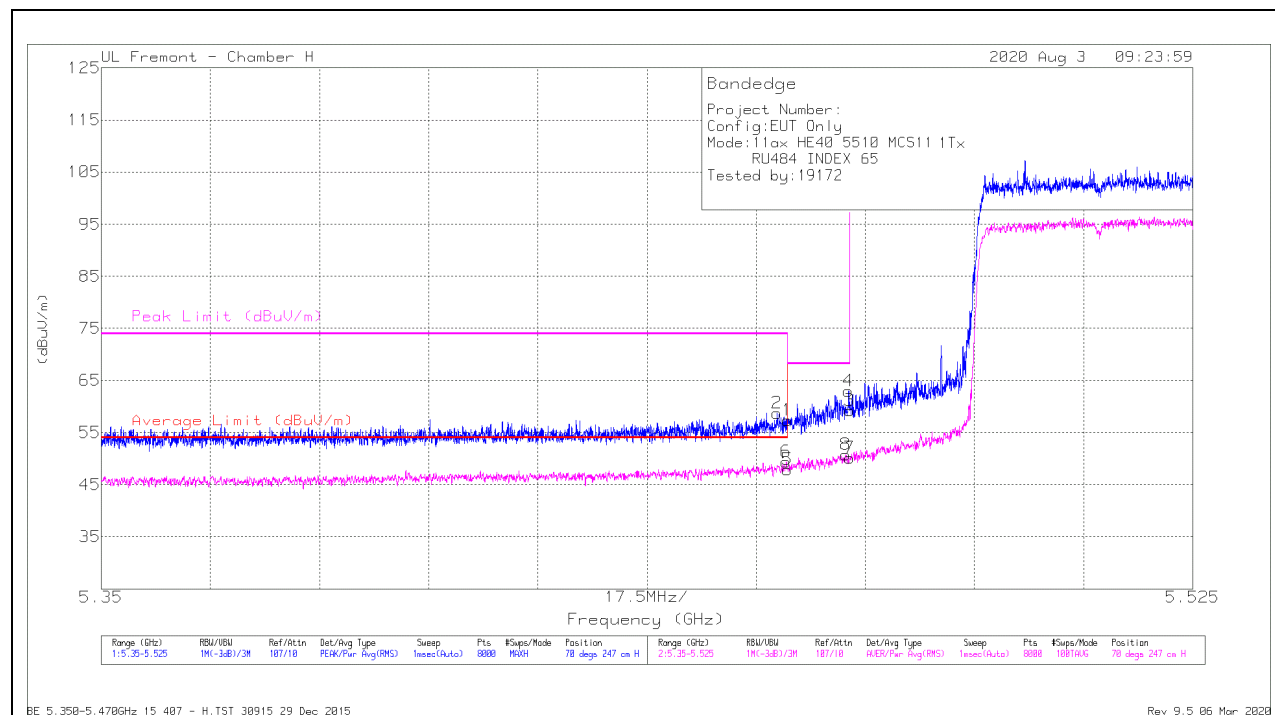


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.04	Pk	35.2	-20.9	57.34	-	-	74	-16.66	70	247	H
2	* 5.45834	44.38	Pk	35.3	-20.9	58.78	-	-	74	-15.22	70	247	H
5	* 5.45998	33.55	RMS	35.2	-20.9	47.85	54	-6.15	-	-	70	247	H
6	* 5.45983	35.06	RMS	35.2	-20.9	49.36	54	-4.64	-	-	70	247	H
8	5.46934	36.44	RMS	35.3	-21	50.74	-	-	-	-	70	247	H
4	5.46983	48.65	Pk	35.3	-21	62.95	-	-	68.2	-5.25	70	247	H
3	5.46998	44.94	Pk	35.3	-21	59.24	-	-	68.2	-8.96	70	247	H
7	5.46998	35.82	RMS	35.3	-21	50.12	-	-	-	-	70	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

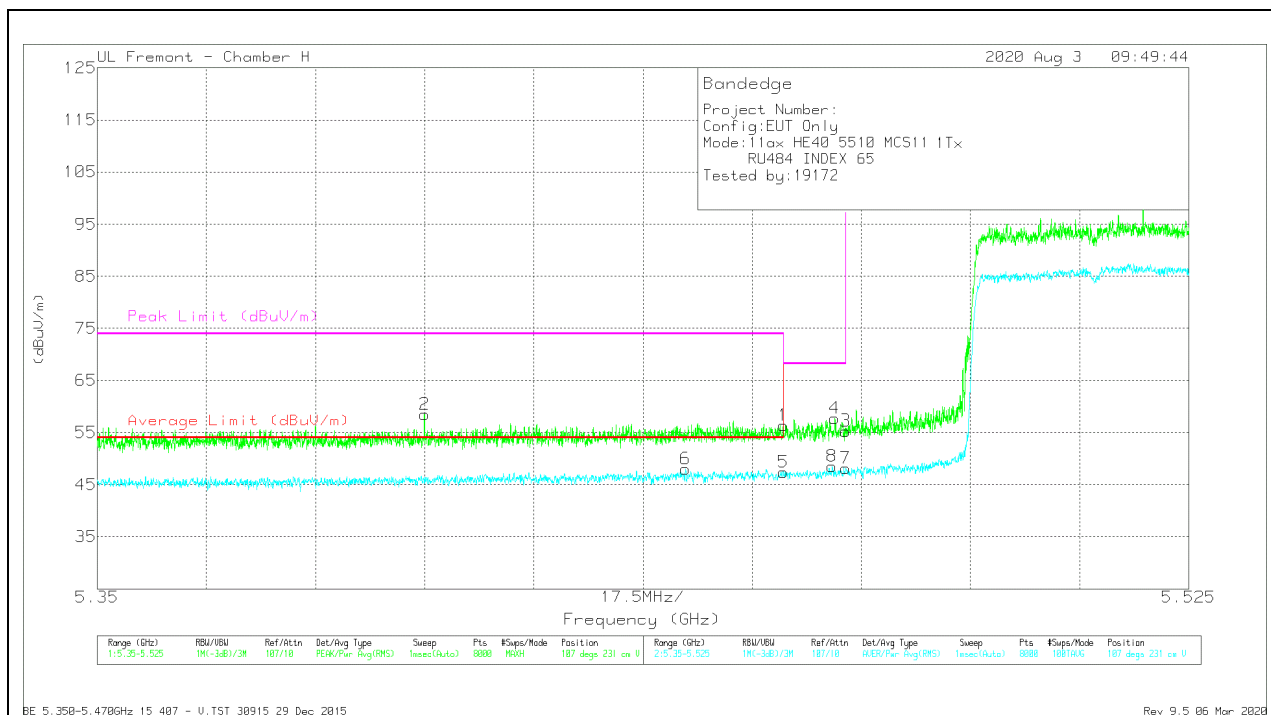

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.07	Pk	35.2	-20.9	56.37	-	-	74	-17.63	107	231	V
2	* 5.40246	44.32	Pk	35	-20.8	58.52	-	-	74	-15.48	107	231	V
5	* 5.45998	33.13	RMS	35.2	-20.9	47.43	54	-6.57	-	-	107	231	V
6	* 5.44432	33.72	RMS	35.1	-20.8	48.02	54	-5.98	-	-	107	231	V
8	5.46781	34.15	RMS	35.3	-20.9	48.55	-	-	-	-	107	231	V
4	5.46825	43.35	Pk	35.3	-20.9	57.75	-	-	68.2	-10.45	107	231	V
3	5.46998	41	Pk	35.3	-21	55.3	-	-	68.2	-12.9	107	231	V
7	5.46998	33.87	RMS	35.3	-21	48.17	-	-	-	-	107	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

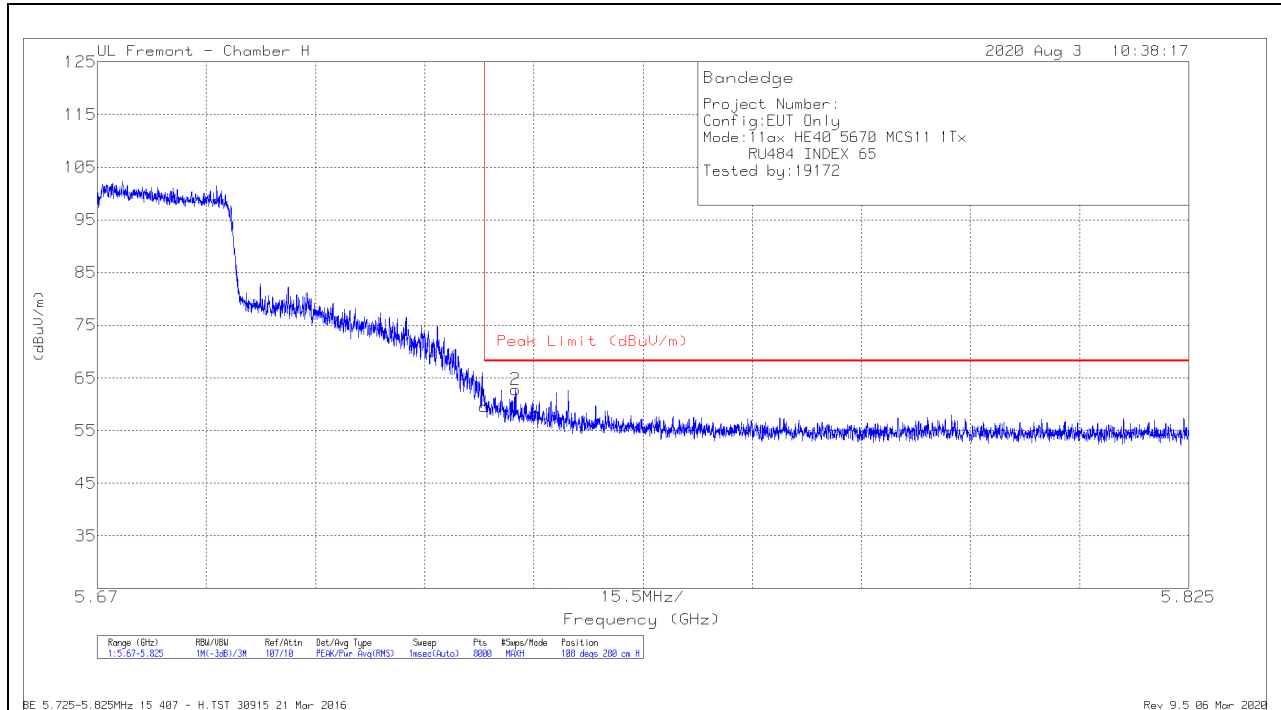

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.7	Pk	35	-21.1	59.6	68.2	-8.6	108	280	H
2	5.72941	48.87	Pk	35	-21.1	62.77	68.2	-5.43	108	280	H

Pk - Peak detector

VERTICAL RESULT

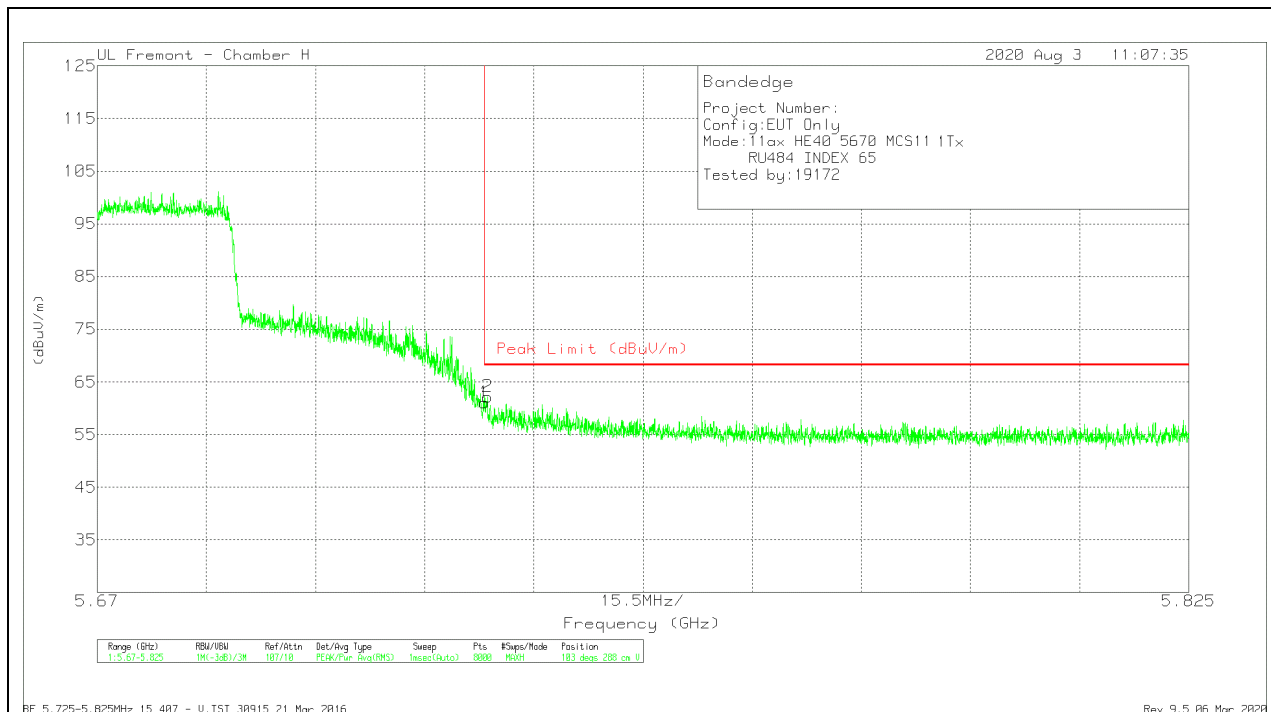


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.18	Pk	35	-21.1	61.08	68.2	-7.12	103	288	V
2	5.72542	48.42	Pk	34.9	-21.1	62.22	68.2	-5.98	103	288	V

Pk - Peak detector

1TX Antenna 5 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

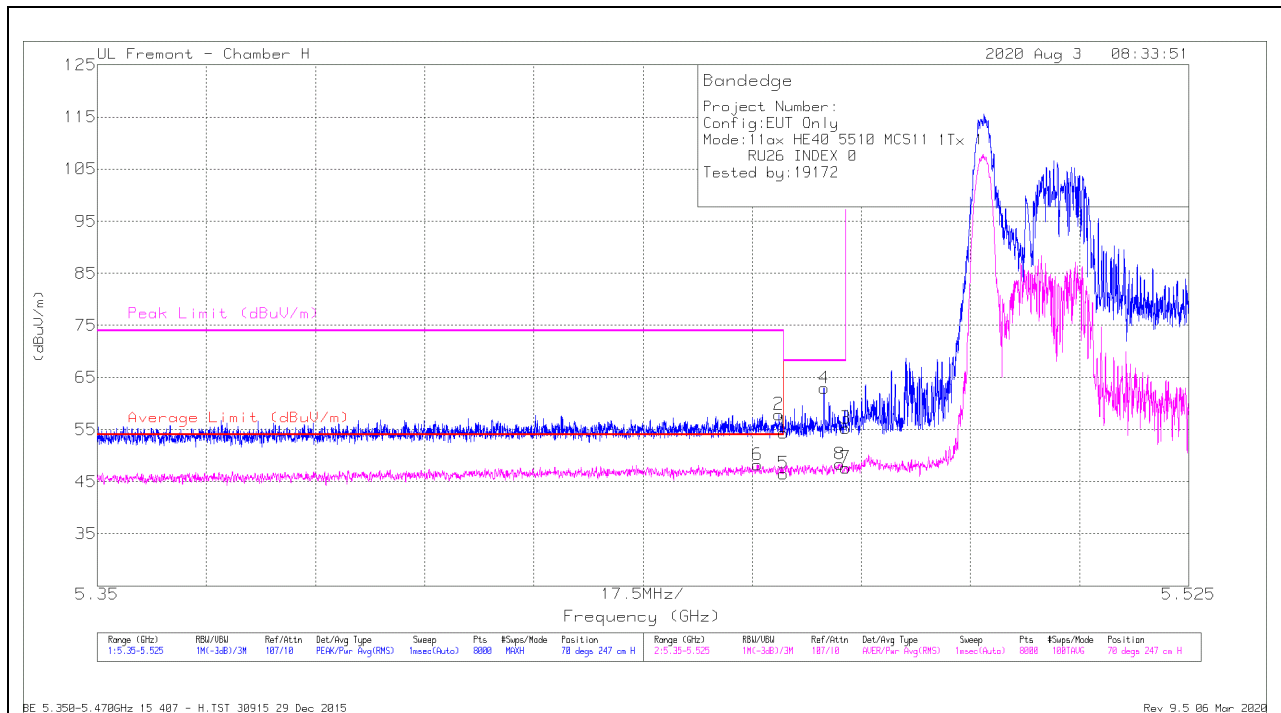


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.13	Pk	35.2	-20.9	54.43	-	-	74	-19.57	70	247	H
2	* 5.45926	43.62	Pk	35.2	-20.9	57.92	-	-	74	-16.08	70	247	H
5	* 5.45998	32.28	RMS	35.2	-20.9	46.58	54	-7.42	-	-	70	247	H
6	* 5.45582	33.85	RMS	35.3	-20.9	48.25	54	-5.75	-	-	70	247	H
4	5.46652	48.72	Pk	35.2	-20.9	63.02	-	-	68.2	-5.18	70	247	H
8	5.46906	34.07	RMS	35.3	-21	48.37	-	-	-	-	70	247	H
3	5.46998	41	Pk	35.3	-21	55.3	-	-	68.2	-12.9	70	247	H
7	5.46998	33.4	RMS	35.3	-21	47.7	-	-	-	-	70	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

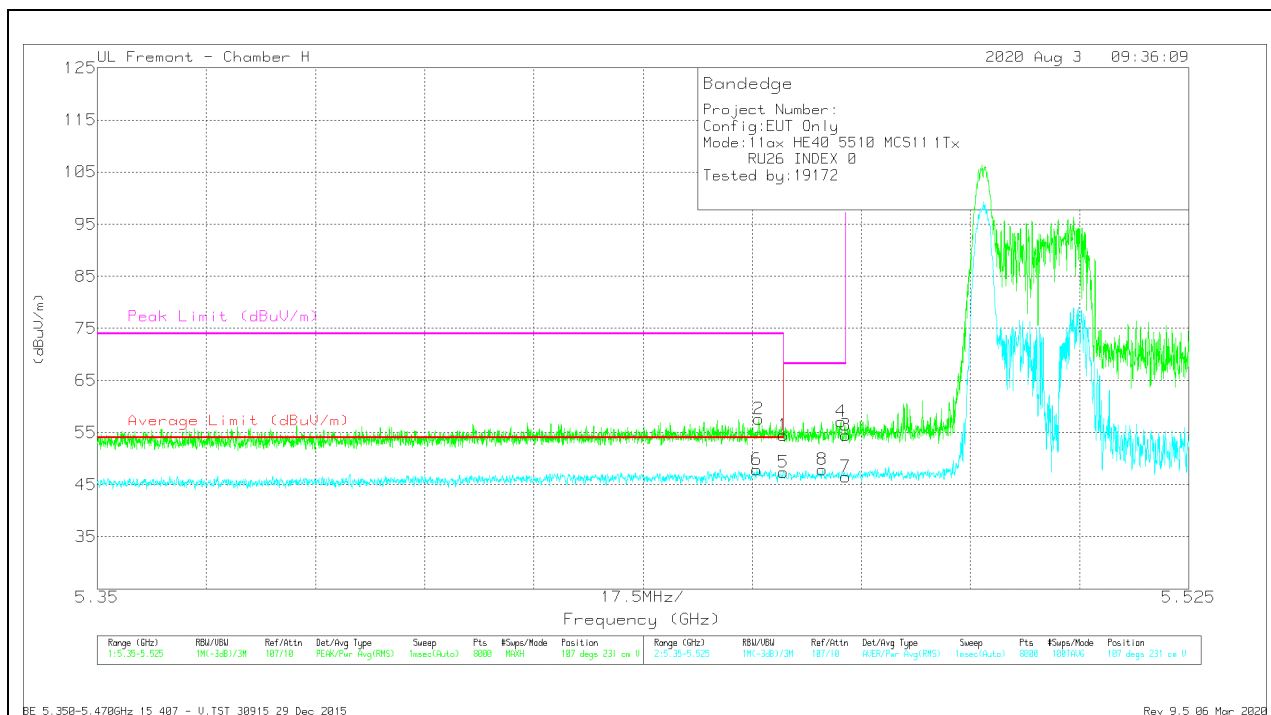

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.22	Pk	35.2	-20.9	54.52	-	-	74	-19.48	107	231	V
2	* 5.45604	43.16	Pk	35.3	-20.9	57.56	-	-	74	-16.44	107	231	V
5	* 5.45998	33.08	RMS	35.2	-20.9	47.38	54	-6.62	-	-	107	231	V
6	* 5.45571	33.5	RMS	35.3	-20.9	47.9	54	-6.1	-	-	107	231	V
8	5.46626	33.57	RMS	35.2	-20.9	47.87	-	-	-	-	107	231	V
4	5.46924	42.85	Pk	35.3	-21	57.15	-	-	68.2	-11.05	107	231	V
3	5.46998	40.21	Pk	35.3	-21	54.51	-	-	68.2	-13.69	107	231	V
7	5.46998	32.24	RMS	35.3	-21	46.54	-	-	-	-	107	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

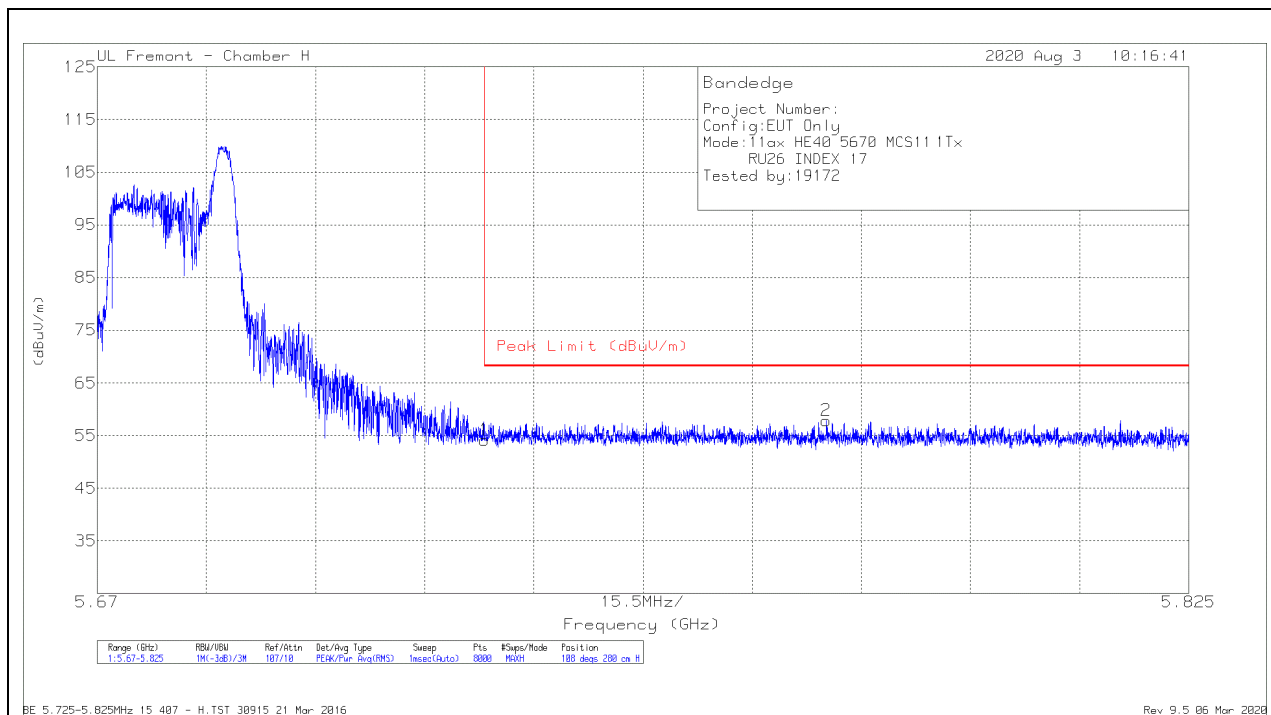

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.25	Pk	35	-21.1	54.15	68.2	-14.05	108	280	H
2	5.77353	43.86	Pk	35.1	-21.1	57.86	68.2	-10.34	108	280	H

Pk - Peak detector

VERTICAL RESULT

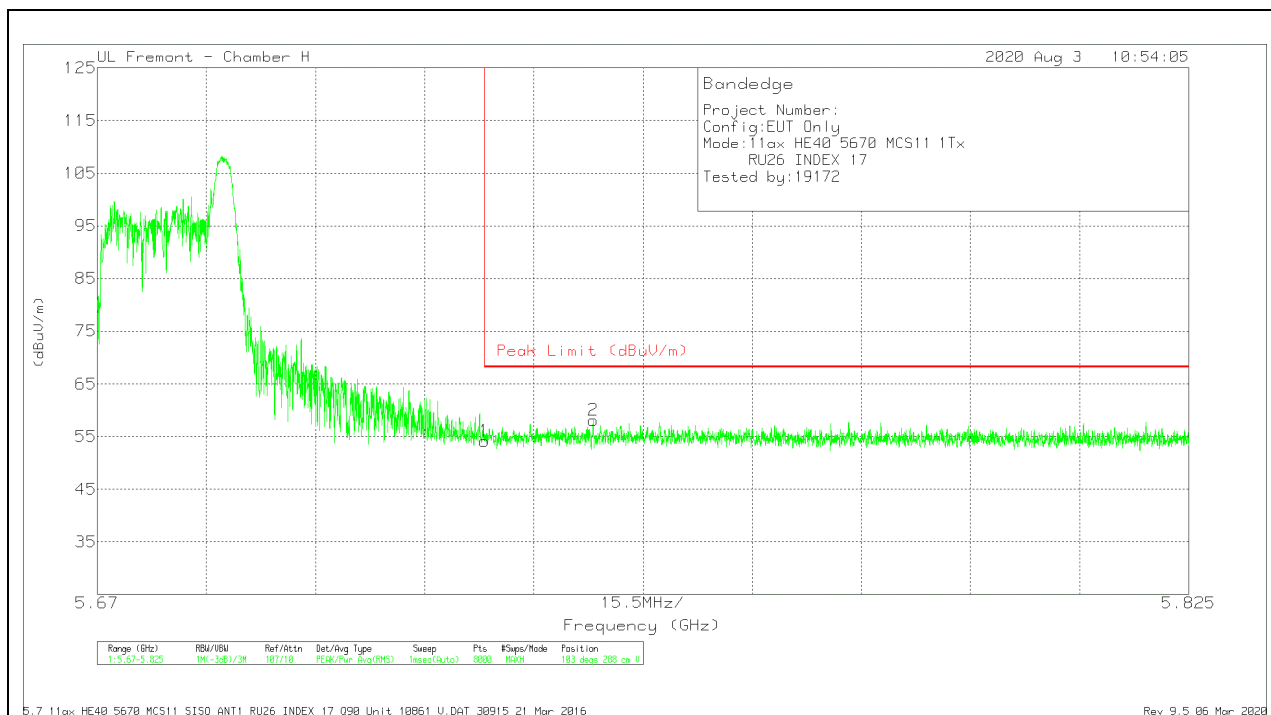


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.24	Pk	35	-21.1	54.14	68.2	-14.06	103	288	V
2	5.74044	44.26	Pk	34.9	-21.1	58.06	68.2	-10.14	103	288	V

Pk - Peak detector

1TX Antenna 6 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

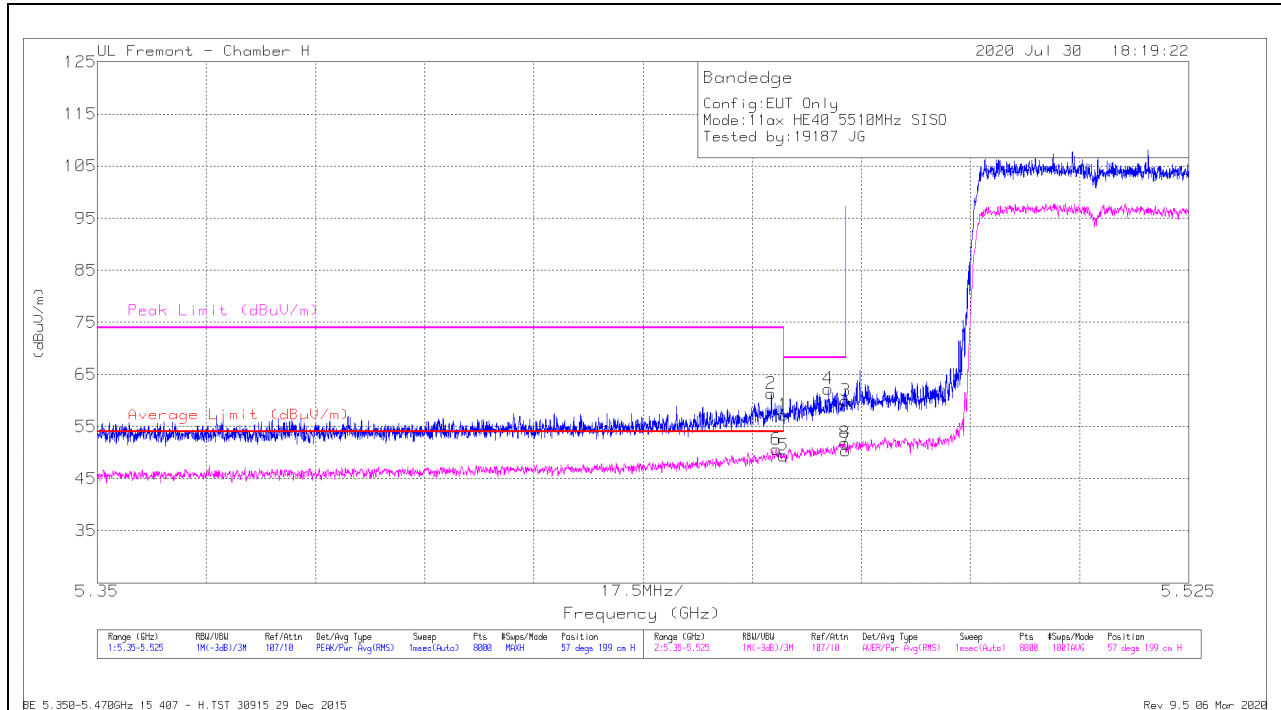


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.94	Pk	35.2	-20.9	57.24	-	-	74	-16.76	57	199	H
2	* 5.45806	46.97	Pk	35.3	-20.9	61.37	-	-	74	-12.63	57	199	H
5	* 5.45998	35.15	RMS	35.2	-20.9	49.45	54	-4.55	-	-	57	199	H
6	* 5.45882	36.26	RMS	35.3	-20.9	50.66	54	-3.34	-	-	57	199	H
4	5.46718	47.88	Pk	35.3	-20.9	62.28	-	-	68.2	-5.92	57	199	H
8	5.46987	37.53	RMS	35.3	-21	51.83	-	-	-	-	57	199	H
3	5.46998	45.64	Pk	35.3	-21	59.94	-	-	68.2	-8.26	57	199	H
7	5.46998	36.14	RMS	35.3	-21	50.44	-	-	-	-	57	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

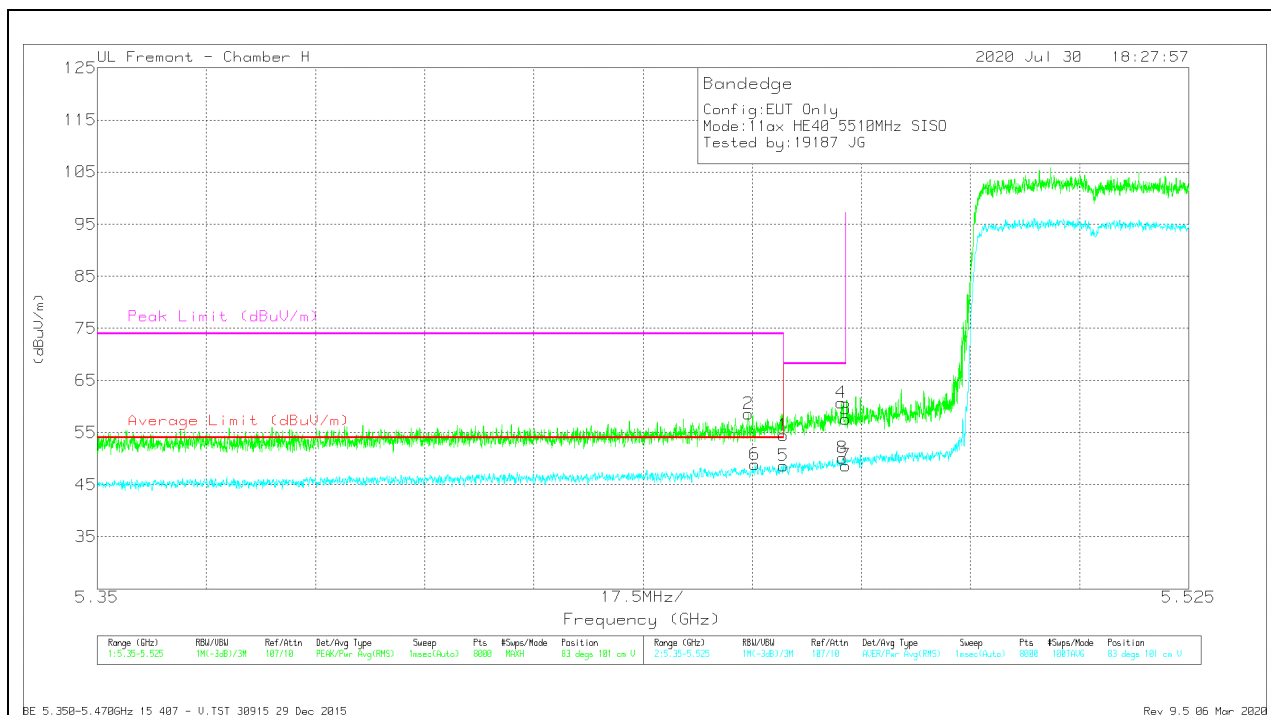

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.2	Pk	35.2	-20.9	54.5	-	-	74	-19.5	83	101	V
2	* 5.4544	44.36	Pk	35.2	-20.9	58.66	-	-	74	-15.34	83	101	V
5	* 5.45998	34.3	RMS	35.2	-20.9	48.6	54	-5.4	-	-	83	101	V
6	* 5.45545	34.44	RMS	35.3	-20.9	48.84	54	-5.16	-	-	83	101	V
4	5.4693	46.47	Pk	35.3	-21	60.77	-	-	68.2	-7.43	83	101	V
8	5.46945	35.86	RMS	35.3	-21	50.16	-	-	-	-	83	101	V
3	5.46998	43.36	Pk	35.3	-21	57.66	-	-	68.2	-10.54	83	101	V
7	5.46998	34.4	RMS	35.3	-21	48.7	-	-	-	-	83	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – MCS 11, 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

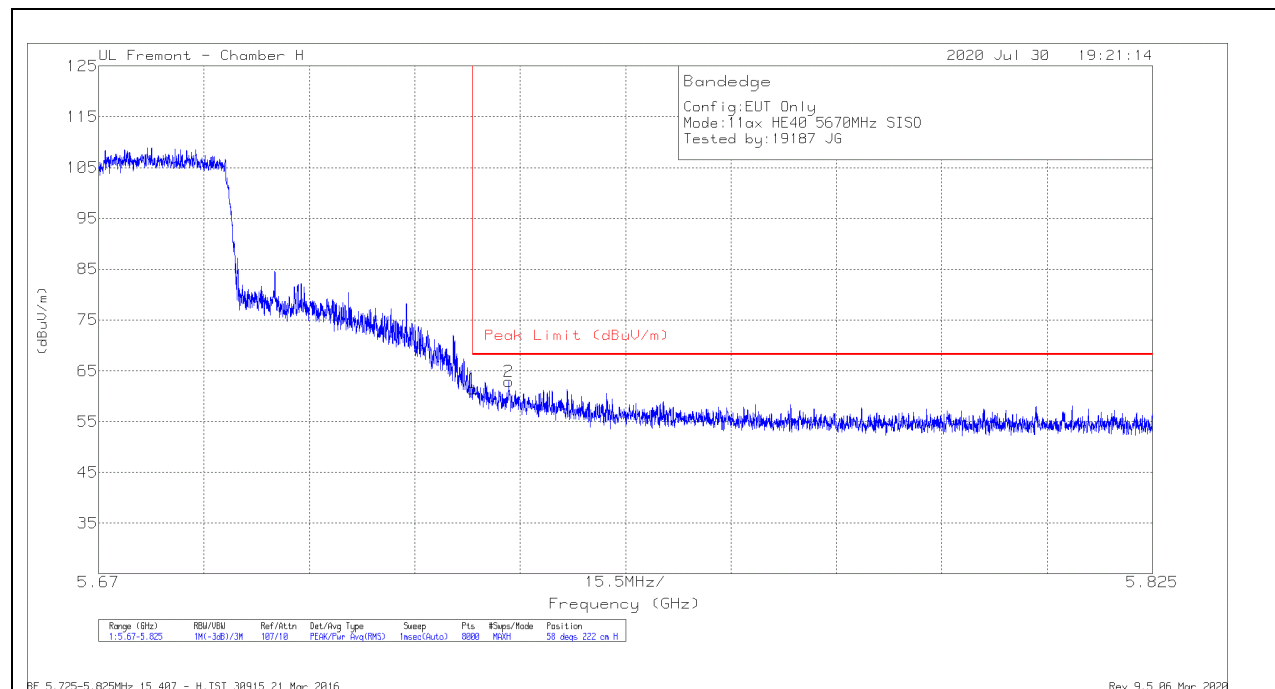

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.53	Pk	35	-21.1	61.43	68.2	-6.77	58	222	H
2	5.73034	49.03	Pk	35	-21.1	62.93	68.2	-5.27	58	222	H

Pk - Peak detector

VERTICAL RESULT

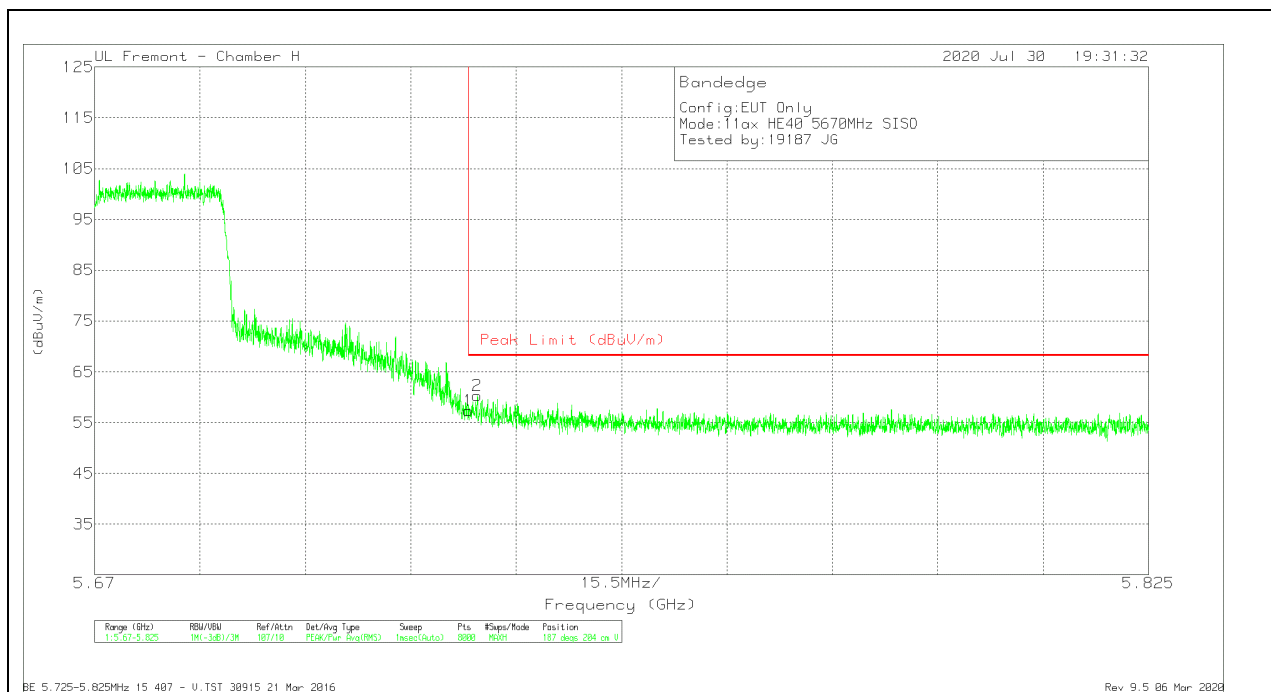


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	5.72501	43.45	Pk	35	-21.1	57.35	68.2	-10.85	187	204	V
2	5.72629	46.49	Pk	34.9	-21.1	60.29	68.2	-7.91	187	204	V

Pk - Peak detector

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

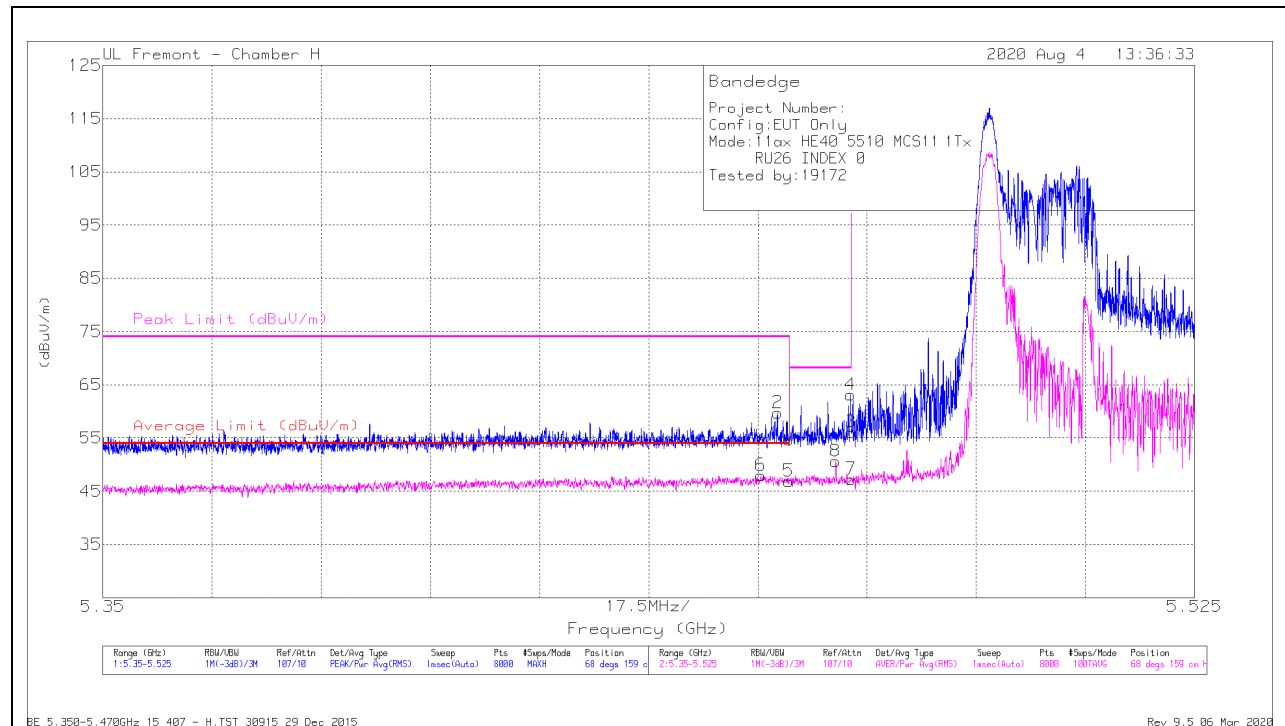


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtz/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.39	Pk	35.2	-20.9	54.69	-	-	74	-19.31	68	159	H
2	* 5.45814	45.34	Pk	35.3	-20.9	59.74	-	-	74	-14.26	68	159	H
5	* 5.45998	32.58	RMS	35.2	-20.9	46.88	54	-7.12	-	-	68	159	H
6	* 5.45545	33.59	RMS	35.3	-20.9	47.99	54	-6.01	-	-	68	159	H
8	5.46748	36.22	RMS	35.3	-20.9	50.62	-	-	-	-	68	159	H
4	5.46985	48.8	Pk	35.3	-21	63.1	-	-	68.2	-5.1	68	159	H
3	5.46998	41.79	Pk	35.3	-21	56.09	-	-	68.2	-12.11	68	159	H
7	5.46998	32.96	RMS	35.3	-21	47.26	-	-	-	-	68	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

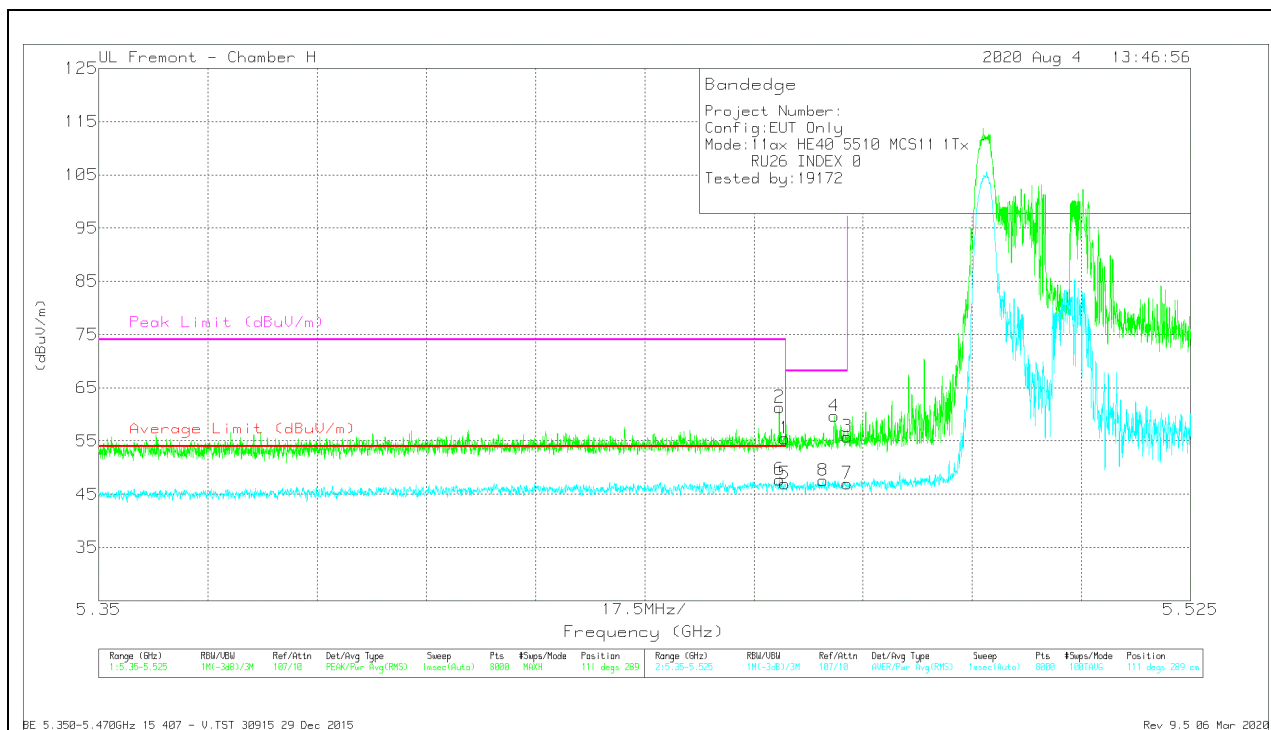

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.19	Pk	35.2	-20.9	55.49	-	-	74	-18.51	111	289	V
2	* 5.45908	46.93	Pk	35.3	-20.9	61.33	-	-	74	-12.67	111	289	V
5	* 5.45998	32.7	RMS	35.2	-20.9	47	54	-7	-	-	111	289	V
6	* 5.45908	33.36	RMS	35.3	-20.9	47.76	54	-6.24	-	-	111	289	V
8	5.46608	33.28	RMS	35.2	-20.9	47.58	-	-	-	-	111	289	V
4	5.46786	45.29	Pk	35.3	-20.9	59.69	-	-	68.2	-8.51	111	289	V
3	5.46998	41.52	Pk	35.3	-21	55.82	-	-	68.2	-12.38	111	289	V
7	5.46998	32.73	RMS	35.3	-21	47.03	-	-	-	-	111	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

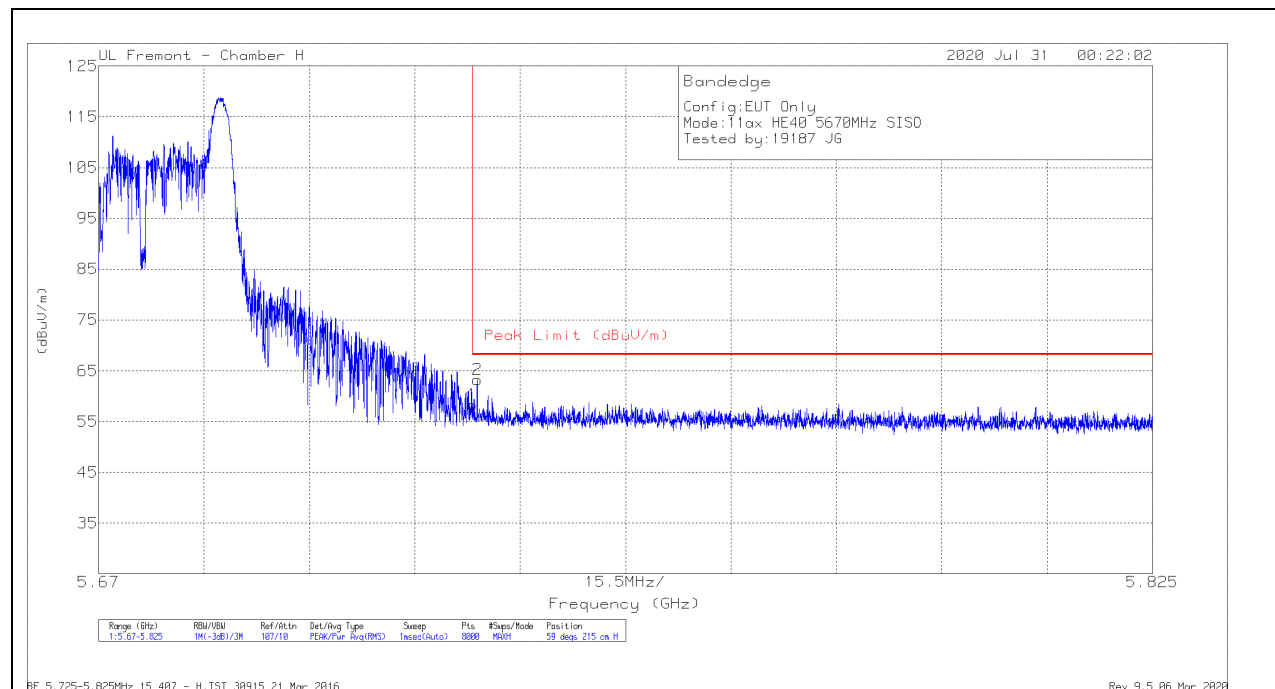

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.39	Pk	35	-21.1	58.29	68.2	-9.91	59	215	H
2	5.72569	49.42	Pk	34.9	-21.1	63.22	68.2	-4.98	59	215	H

Pk - Peak detector

VERTICAL RESULT

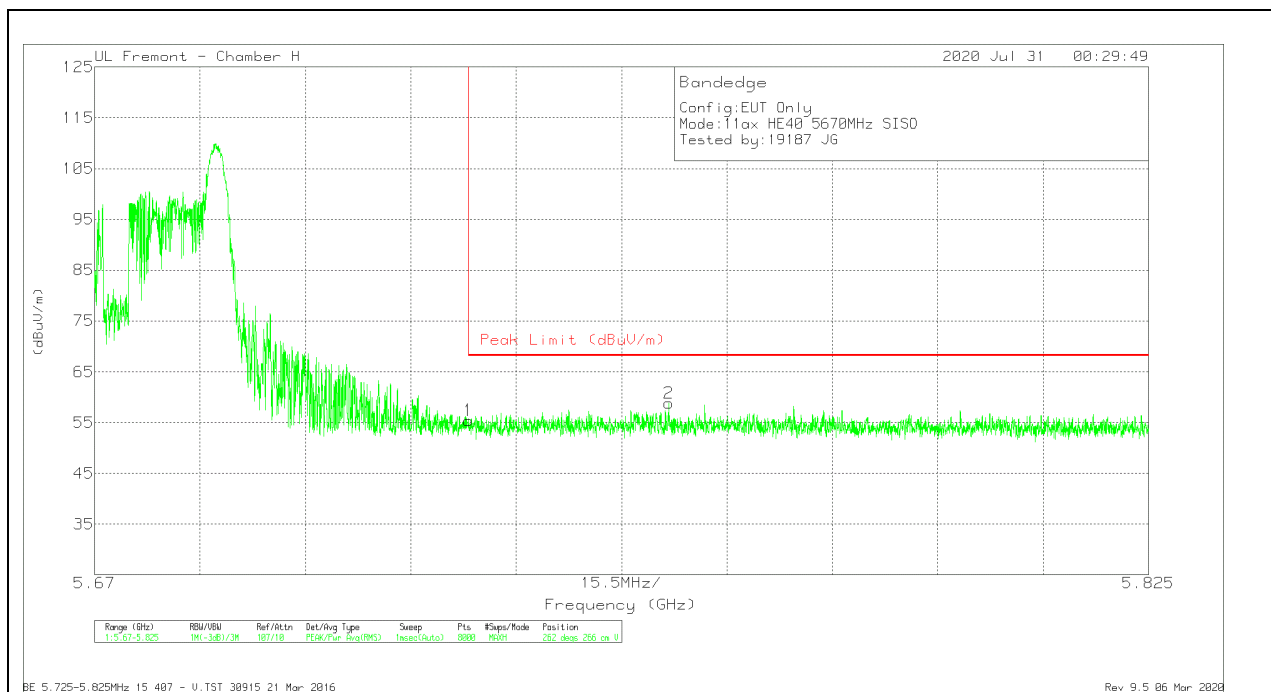


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.54	Pk	35	-21.1	55.44	68.2	-12.76	262	266	V
2	5.75443	44.8	Pk	35	-21	58.8	68.2	-9.4	262	266	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

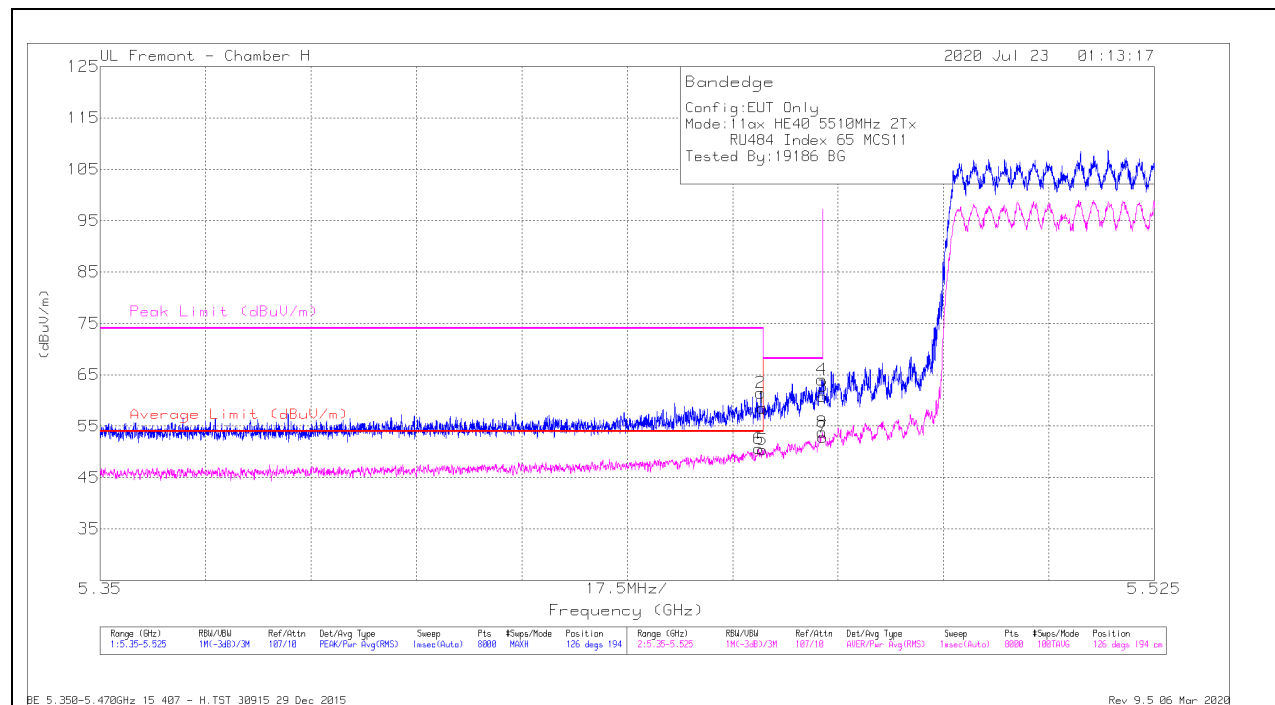

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.25	Pk	35.2	-20.9	58.55	-	-	74	-15.45	126	194	H
2	* 5.45967	47.19	Pk	35.2	-20.9	61.49	-	-	74	-12.51	126	194	H
5	* 5.45998	36.09	RMS	35.2	-20.9	5.39	54	-3.61	-	-	126	194	H
6	* 5.45993	36.34	RMS	35.2	-20.9	50.64	54	-3.36	-	-	126	194	H
4	5.4698	49.76	Pk	35.3	-21	64.06	-	-	68.2	-4.14	126	194	H
8	5.46987	39.52	RMS	35.3	-21	53.82	-	-	-	-	126	194	H
3	5.46998	46.47	Pk	35.3	-21	60.77	-	-	68.2	-7.43	126	194	H
7	5.46998	38.57	RMS	35.3	-21	52.87	-	-	-	-	126	194	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

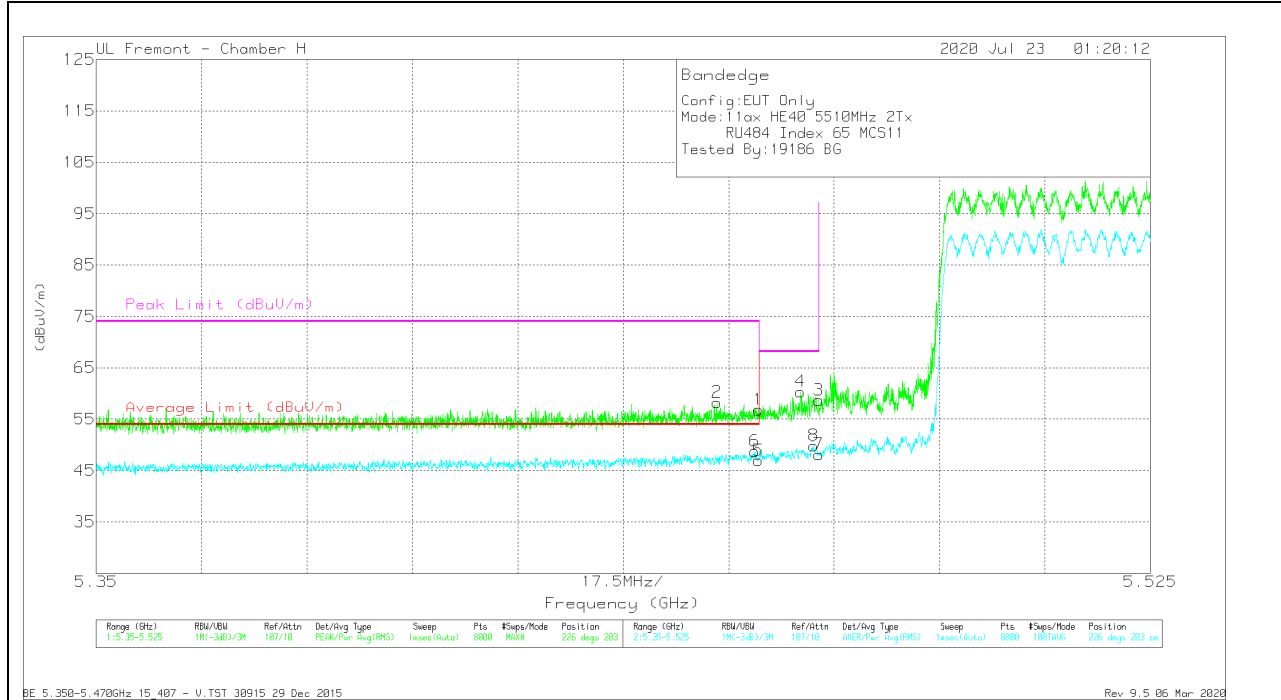

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.55	Pk	35.2	-20.9	56.85	-	-	74	-17.15	226	203	V
2	* 5.45305	43.98	Pk	35.2	-20.9	58.28	-	-	74	-15.72	226	203	V
5	* 5.45998	32.66	RMS	35.2	-20.9	46.96	54	-7.04	-	-	226	203	V
6	* 5.45935	34.46	RMS	35.2	-20.9	48.76	54	-5.24	-	-	226	203	V
4	5.46694	45.97	Pk	35.3	-20.9	60.37	-	-	68.2	-7.83	226	203	V
8	5.4691	35.54	RMS	35.3	-21	49.84	-	-	-	-	226	203	V
3	5.46998	44.37	Pk	35.3	-21	58.67	-	-	68.2	-9.53	226	203	V
7	5.46998	33.8	RMS	35.3	-21	48.1	-	-	-	-	226	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

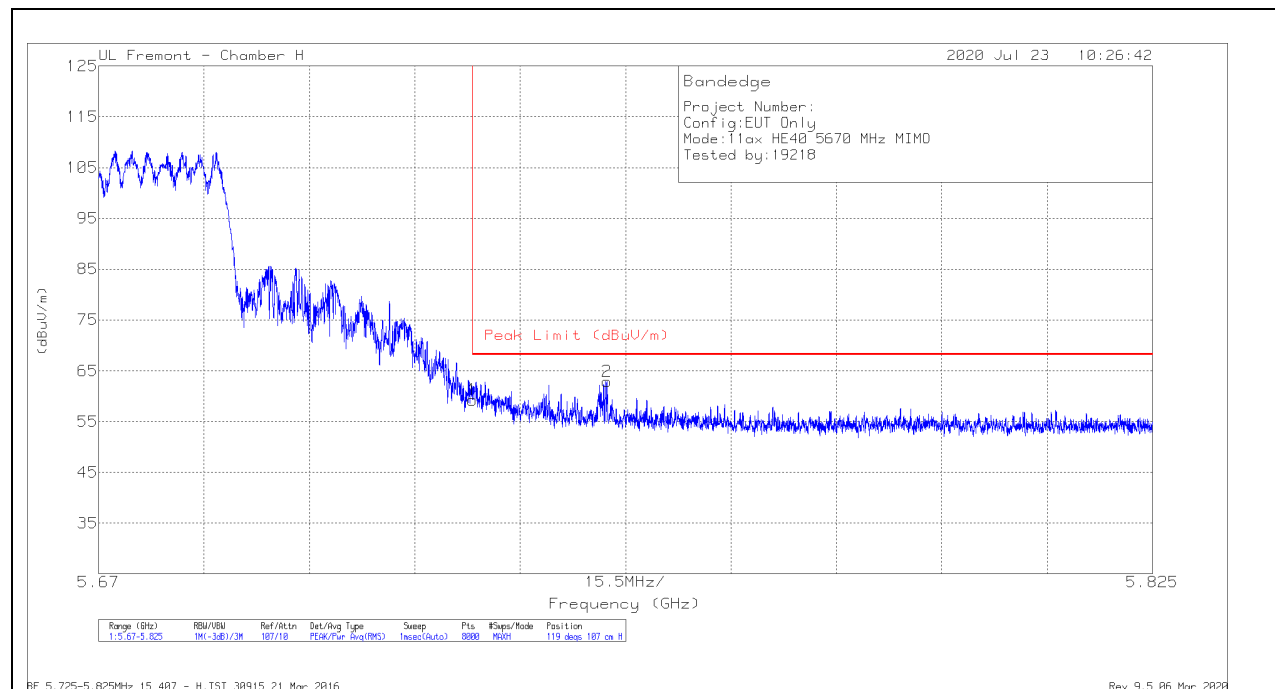

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.37	Pk	35	-21.1	59.27	68.2	-8.93	119	107	H
2	5.74474	48.93	Pk	35	-21	62.93	68.2	-5.27	119	107	H

Pk - Peak detector

VERTICAL RESULT


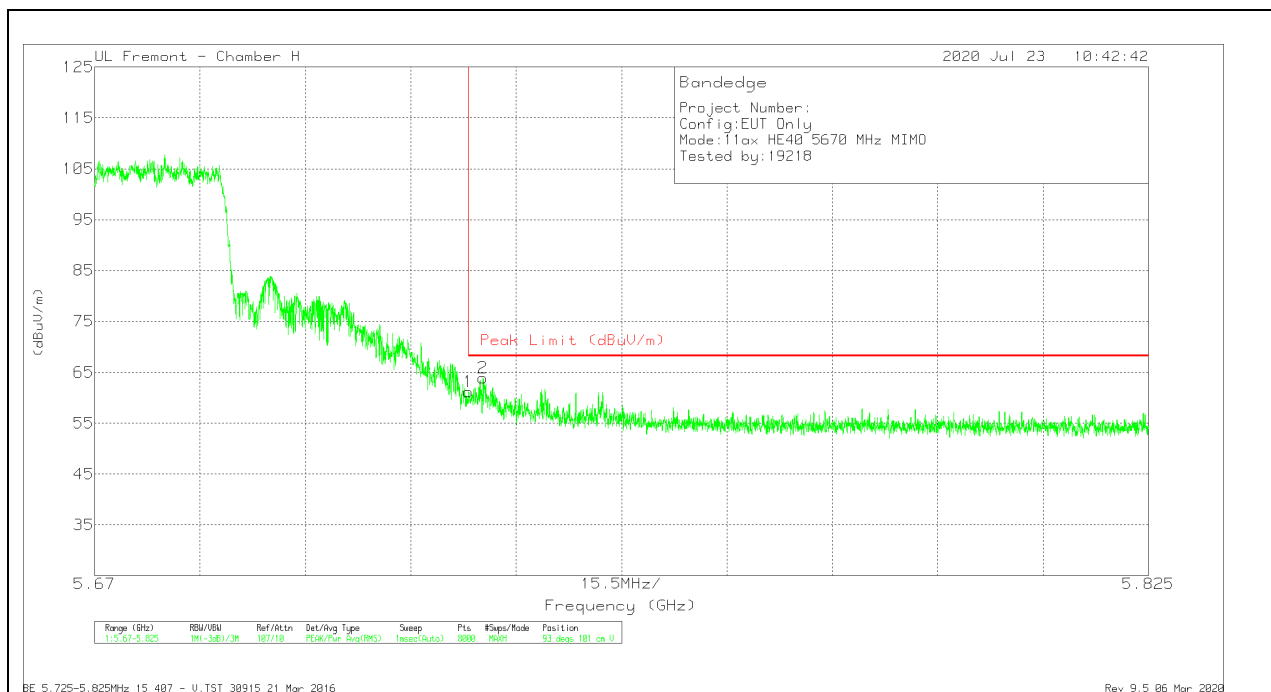


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.32	Pk	35	-21.1	61.22	68.2	-6.98	93	101	V
2	5.72712	50.04	Pk	34.9	-21.1	63.84	68.2	-4.36	93	101	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

484 Tones, RU index 65 RESULTS

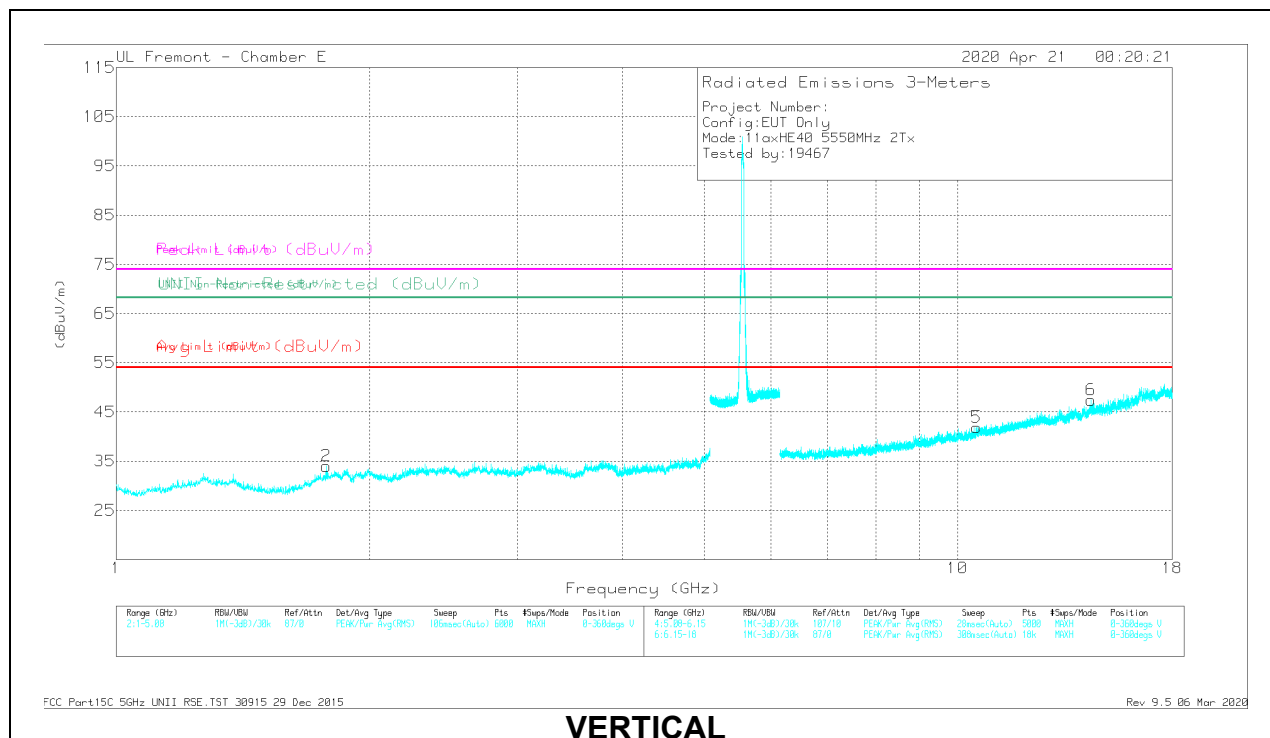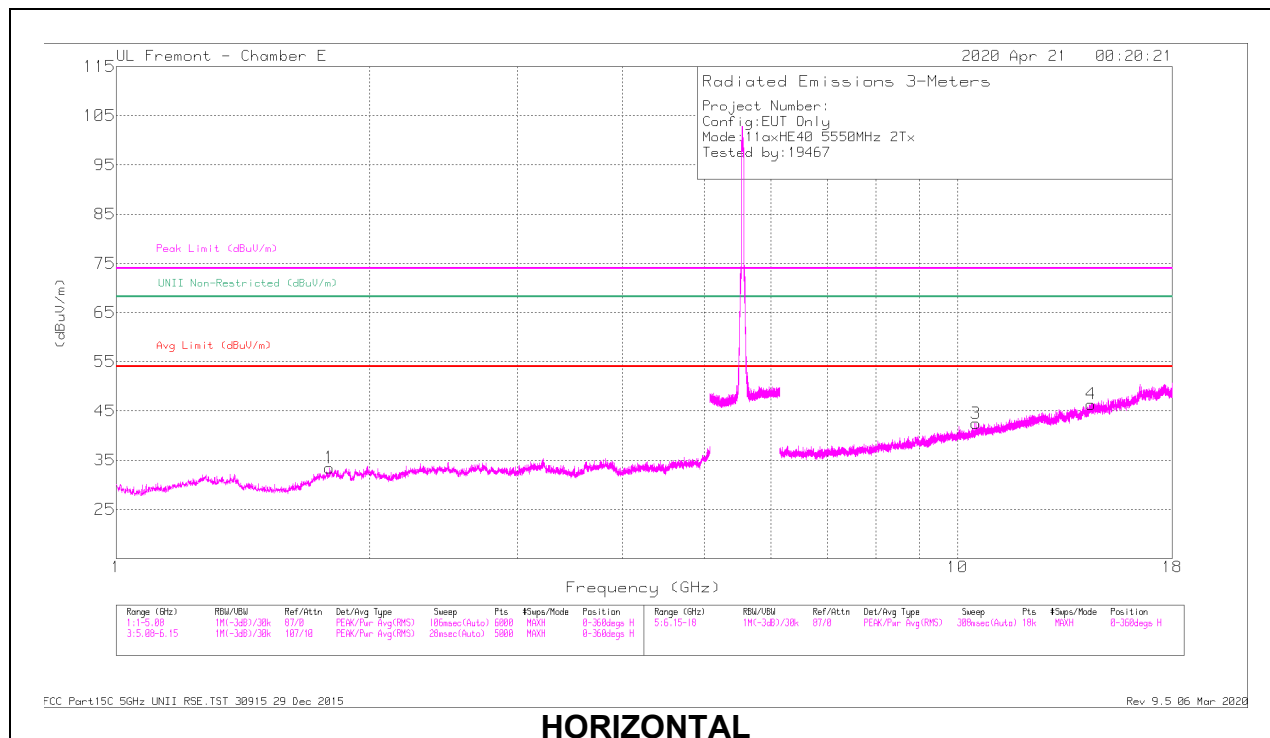

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.77677	45.03	PK-U	30.3	-35.2	40.13	68.2	-28.07	0	101	V
	1.77694	33.22	ADR	30.3	-35.2	28.32	-	-	0	101	V
1	1.79234	32.97	ADR	30.4	-35	28.37	-	-	0	200	H
	1.7949	44.45	PK-U	30.5	-35	39.95	68.2	-28.25	0	200	H
3	10.52037	26.09	ADR	37.5	-26.3	37.29	-	-	0	101	H
	10.52085	37.11	PK-U	37.5	-26.3	48.31	68.2	-19.89	0	101	H
5	10.53851	25.3	ADR	37.6	-26.1	36.8	-	-	113	199	V
	10.53916	37.05	PK-U	37.6	-26.1	48.55	68.2	-19.65	113	199	V
6	14.40737	24.15	ADR	39.3	-21.2	42.25	-	-	113	199	V
	14.40815	34.92	PK-U	39.3	-21.3	52.92	68.2	-15.28	113	199	V
4	14.41912	23.59	ADR	39.3	-21.3	41.59	-	-	88	199	H
	14.41958	35.77	PK-U	39.4	-21.3	53.87	68.2	-14.33	88	199	H

PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

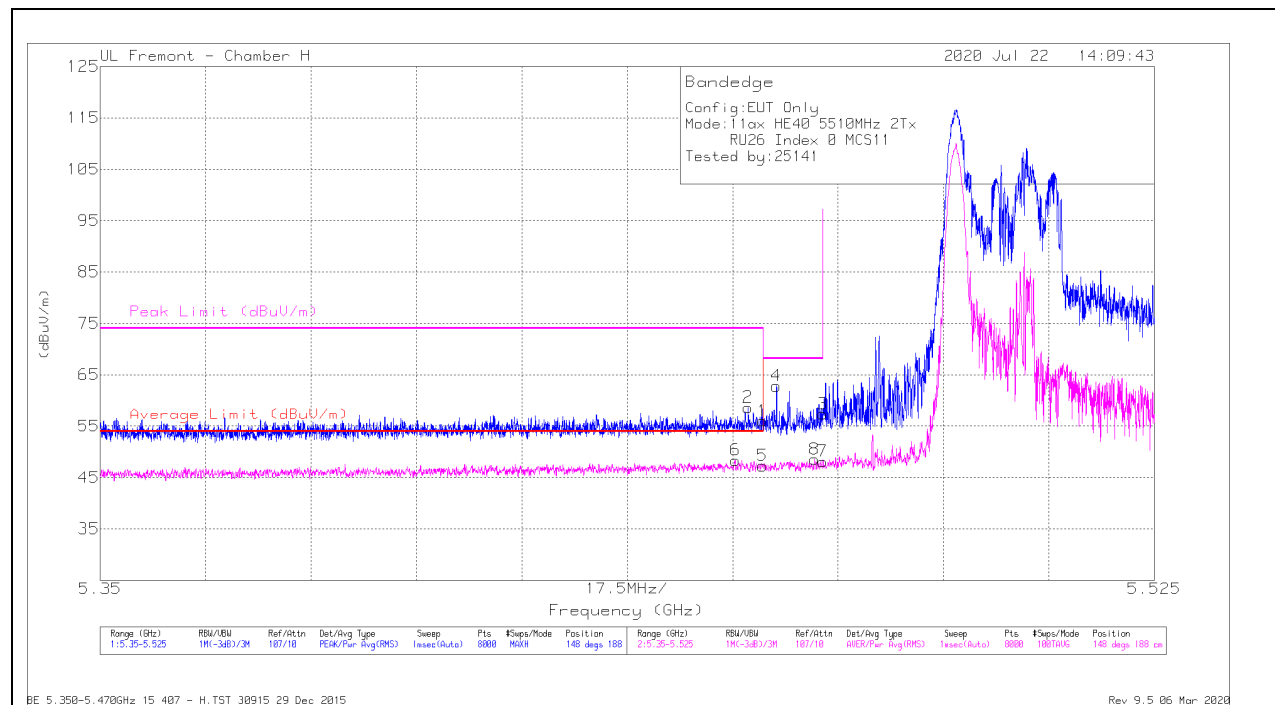

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.72	Pk	35.2	-20.9	56.02	-	-	74	-17.98	148	188	H
2	* 5.45757	44.24	Pk	35.3	-20.9	58.64	-	-	74	-15.36	148	188	H
5	* 5.45998	33	RMS	35.2	-20.9	47.3	54	-6.7	-	-	148	188	H
6	* 5.45543	33.98	RMS	35.3	-20.9	48.38	54	-5.62	-	-	148	188	H
4	5.46228	48.53	Pk	35.2	-20.9	62.83	-	-	68.2	-5.37	148	188	H
8	5.46862	34.27	RMS	35.3	-21	48.57	-	-	-	-	148	188	H
3	5.46998	43.06	Pk	35.3	-21	57.36	-	-	68.2	-10.84	148	188	H
7	5.46998	33.84	RMS	35.3	-21	48.14	-	-	-	-	148	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

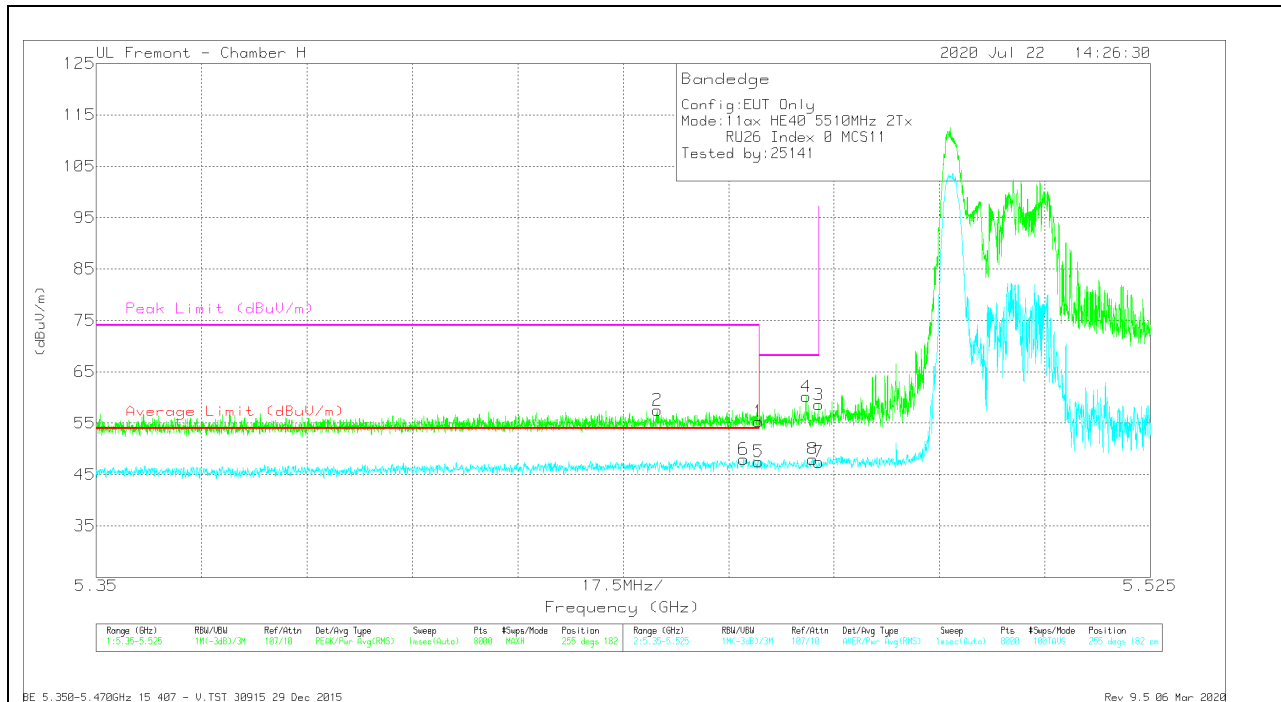


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.01	Pk	35.2	-20.9	55.31	-	-	74	-18.69	255	182	V
2	* 5.44313	43.24	Pk	35.1	-20.8	57.54	-	-	74	-16.46	255	182	V
5	* 5.45998	33.22	RMS	35.2	-20.9	47.52	54	-6.48	-	-	255	182	V
6	* 5.45749	33.59	RMS	35.3	-20.9	47.99	54	-6.01	-	-	255	182	V
4	5.46786	45.77	Pk	35.3	-20.9	60.17	-	-	68.2	-8.03	255	182	V
8	5.46897	33.72	RMS	35.3	-21	48.02	-	-	-	-	255	182	V
3	5.46998	44.29	Pk	35.3	-21	58.59	-	-	68.2	-9.61	255	182	V
7	5.46998	33.12	RMS	35.3	-21	47.42	-	-	-	-	255	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

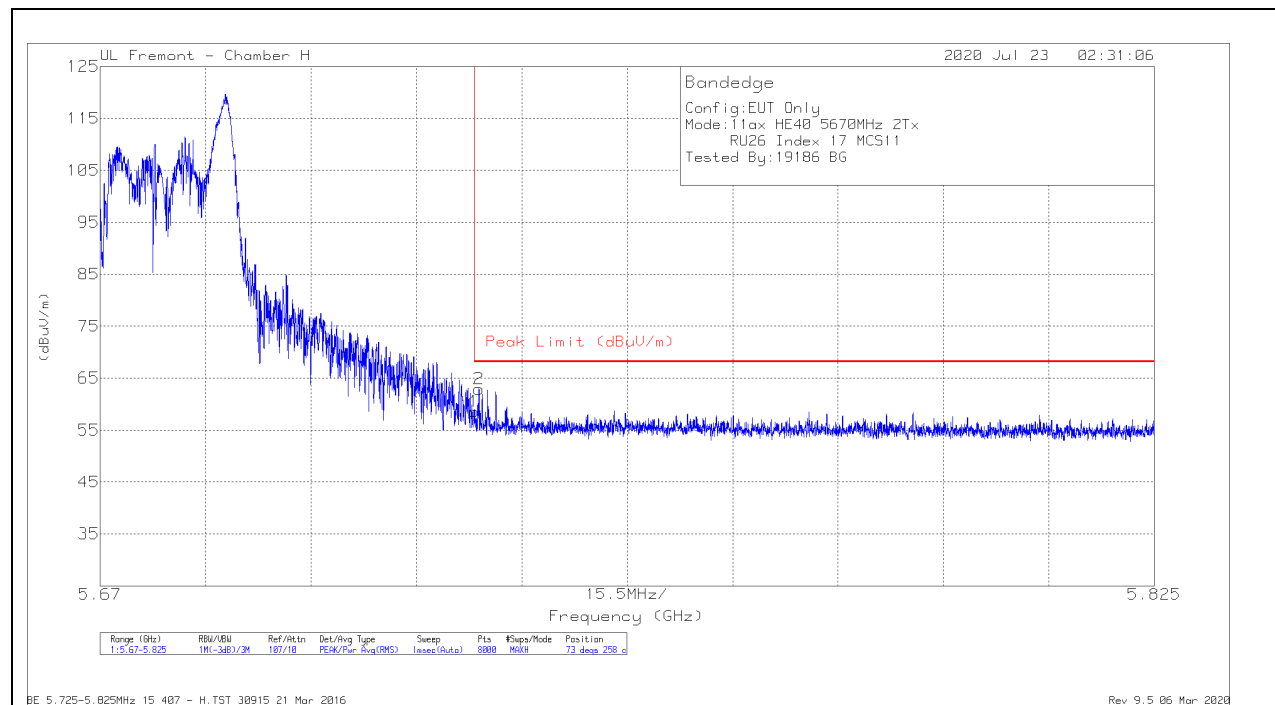

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.69	Pk	35	-21.1	58.59	68.2	-9.61	73	258	H
2	5.72569	49.1	Pk	34.9	-21.1	62.9	68.2	-5.3	73	258	H

Pk - Peak detector

VERTICAL RESULT


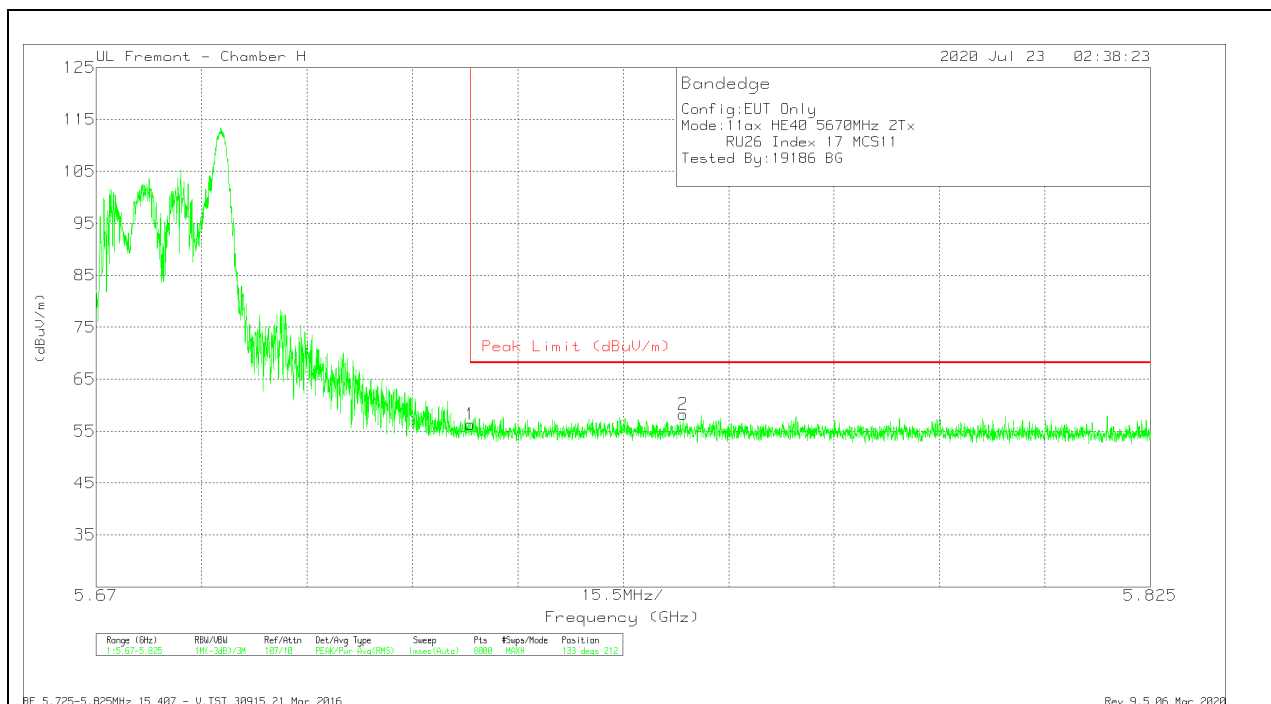


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.4	Pk	35	-21.1	56.3	68.2	-11.9	133	212	V
2	5.75631	44.15	Pk	35	-20.9	58.25	68.2	-9.95	133	212	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 17 RESULTS

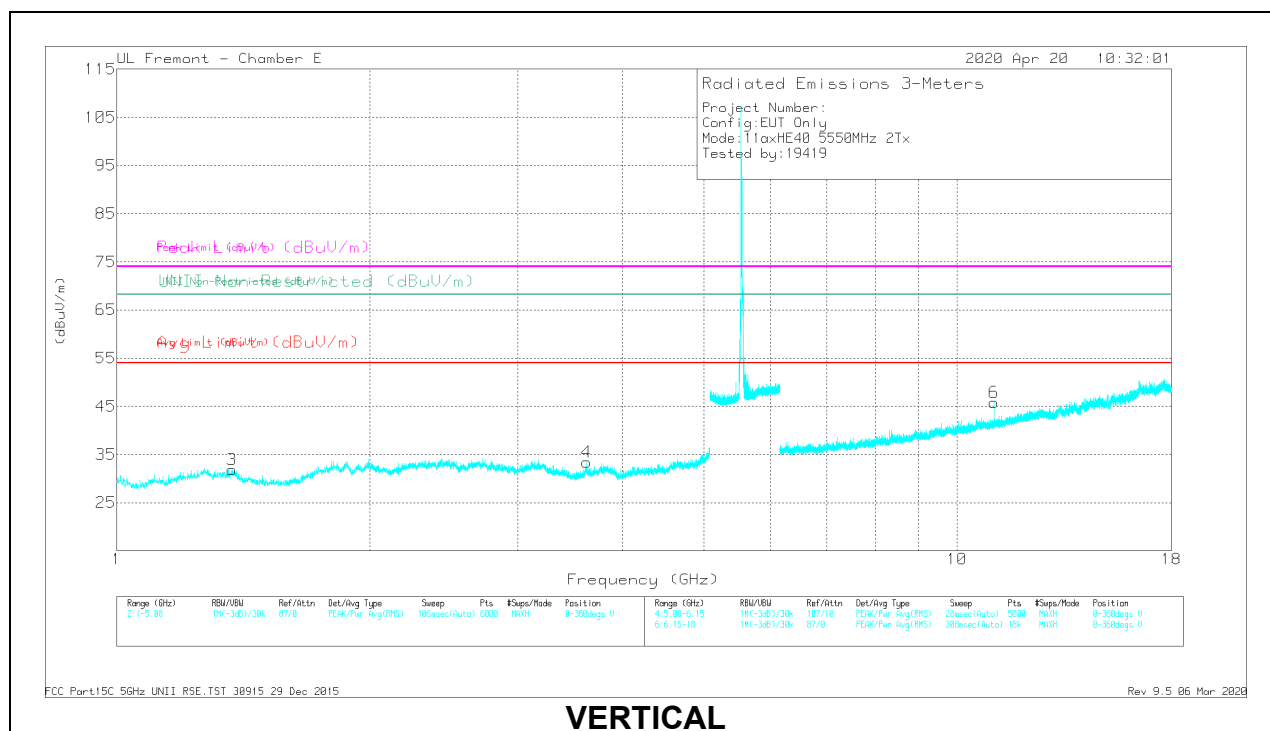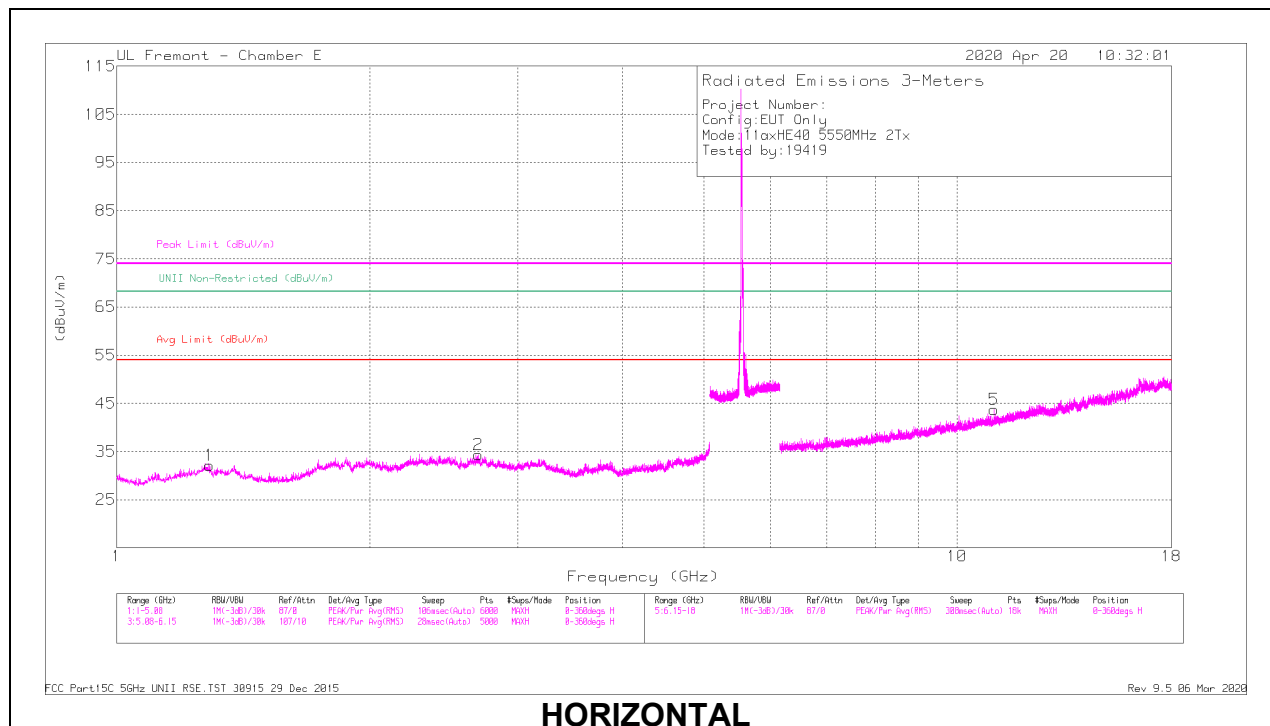

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Path (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2897	44.32	PK-U	29.6	-34.9	39.02	-	-	74	-34.98	-	-	219	136	H
	* 1.28781	32.51	ADR	29.6	-34.9	27.21	54	-26.79	-	-	-	-	219	136	H
2	* 2.69235	45.63	PK-U	32.6	-35.6	42.63	-	-	74	-31.37	-	-	120	372	H
	* 2.69177	33.59	ADR	32.6	-35.6	30.59	54	-23.41	-	-	-	-	120	372	H
3	* 1.37013	44.44	PK-U	29.8	-35.3	38.94	-	-	74	-35.06	-	-	199	124	V
	* 1.37117	32.68	ADR	29.8	-35.4	27.08	54	-26.92	-	-	-	-	199	124	V
4	* 3.62359	43.86	PK-U	33.5	-34.2	43.16	-	-	74	-30.84	-	-	94	370	V
	* 3.62371	31.3	ADR	33.5	-34.2	30.6	54	-23.4	-	-	-	-	94	370	V
5	* 11.06433	39.21	PK-U	37.7	-25.3	51.61	-	-	74	-22.39	-	-	287	106	H
	* 11.06386	28	ADR	37.7	-25.3	40.4	54	-13.6	-	-	-	-	287	106	H
6	* 11.06453	42.23	PK-U	37.7	-25.3	54.63	-	-	74	-19.37	-	-	318	102	V
	* 11.06431	30.61	ADR	37.7	-25.3	43.01	54	-10.99	-	-	-	-	318	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – MCS 11, 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

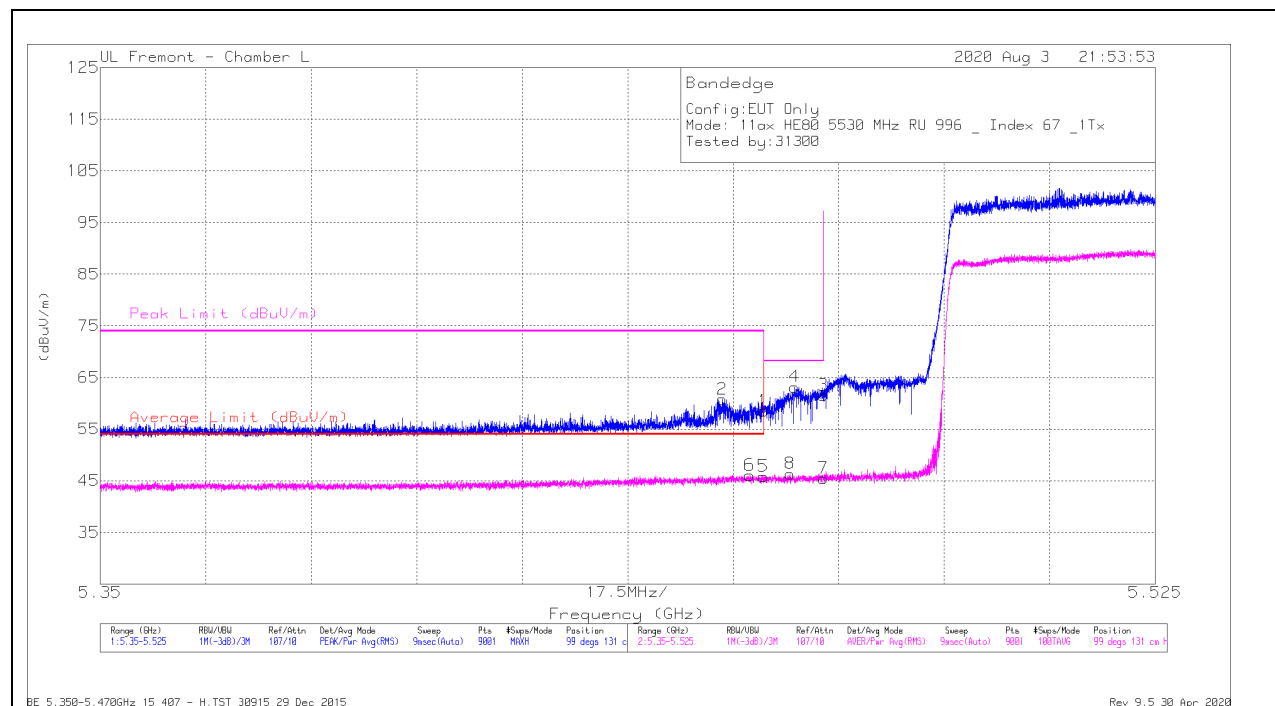


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 5.45999	40.85	Pk	34.6	-16.9	0	58.55	-	-	74	-15.45	99	131	H
2	* 5.45317	43.05	Pk	34.6	-16.9	0	60.75	-	-	74	-13.25	99	131	H
3	5.46999	43.85	Pk	34.6	-16.9	0	61.55	-	-	68.2	-6.65	99	131	H
4	5.46517	45.56	Pk	34.5	-16.9	0	63.16	-	-	68.2	-5.04	99	131	H
5	* 5.45999	27.97	RMS	34.6	-16.9	0	45.67	54	-8.33	-	-	99	131	H
6	* 5.45772	28.13	RMS	34.7	-16.9	0	45.93	54	-8.07	-	-	99	131	H
7	5.46999	27.59	RMS	34.6	-16.9	0	45.29	-	-	-	-	99	131	H
8	5.46443	28.58	RMS	34.5	-16.9	0	46.18	-	-	-	-	99	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

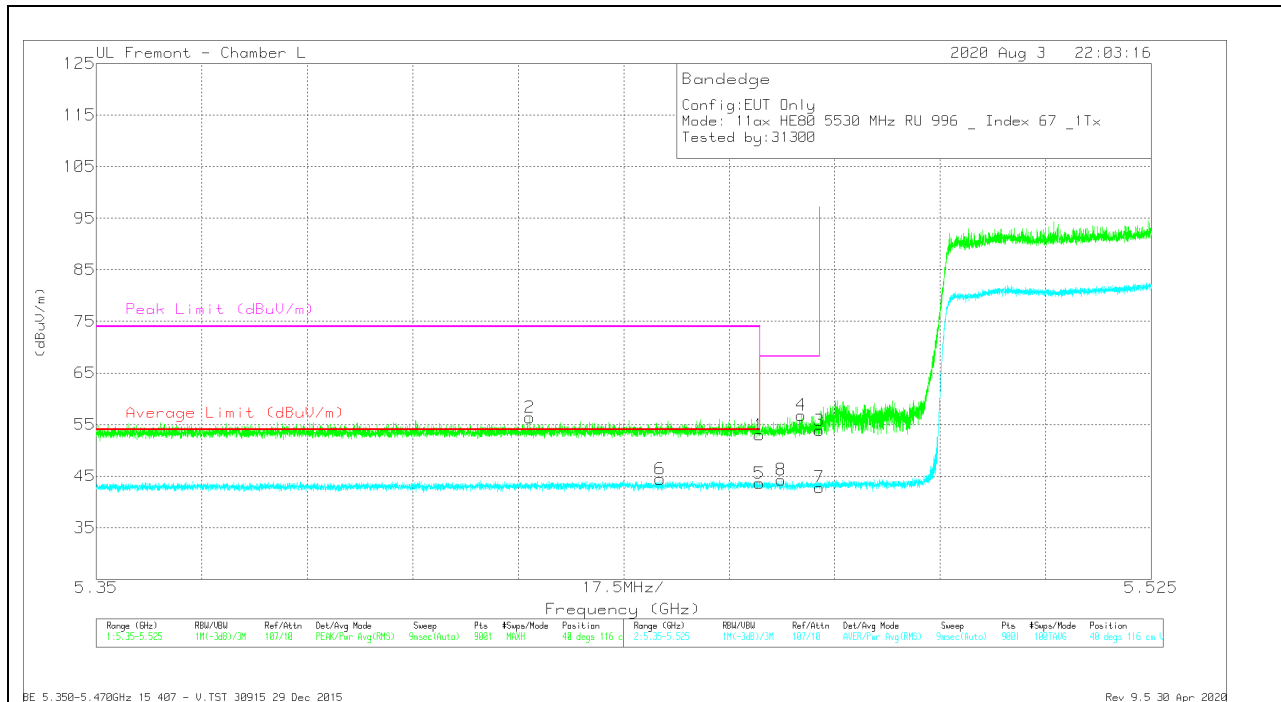


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cb1Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	35.28	Pk	34.6	-16.9	52.98	-	-	74	-21.02	40	116	V
2	* 5.42192	38.76	Pk	34.5	-16.9	56.36	-	-	74	-17.64	40	116	V
3	5.46999	36.13	Pk	34.6	-16.9	53.83	-	-	68.2	-14.37	40	116	V
4	5.46994	39.12	Pk	34.6	-16.9	56.82	-	-	68.2	-11.38	40	116	V
5	* 5.45999	26.73	RMS	34.6	-16.9	43.43	54	-10.57	-	-	40	116	V
6	* 5.44353	26.57	RMS	34.6	-16.9	44.27	54	-9.73	-	-	40	116	V
7	5.46999	24.96	RMS	34.6	-16.9	42.66	-	-	-	-	40	116	V
8	5.46357	26.47	RMS	34.5	-16.9	44.07	-	-	-	-	40	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1TX Antenna 5 MODE -MCS 11, 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

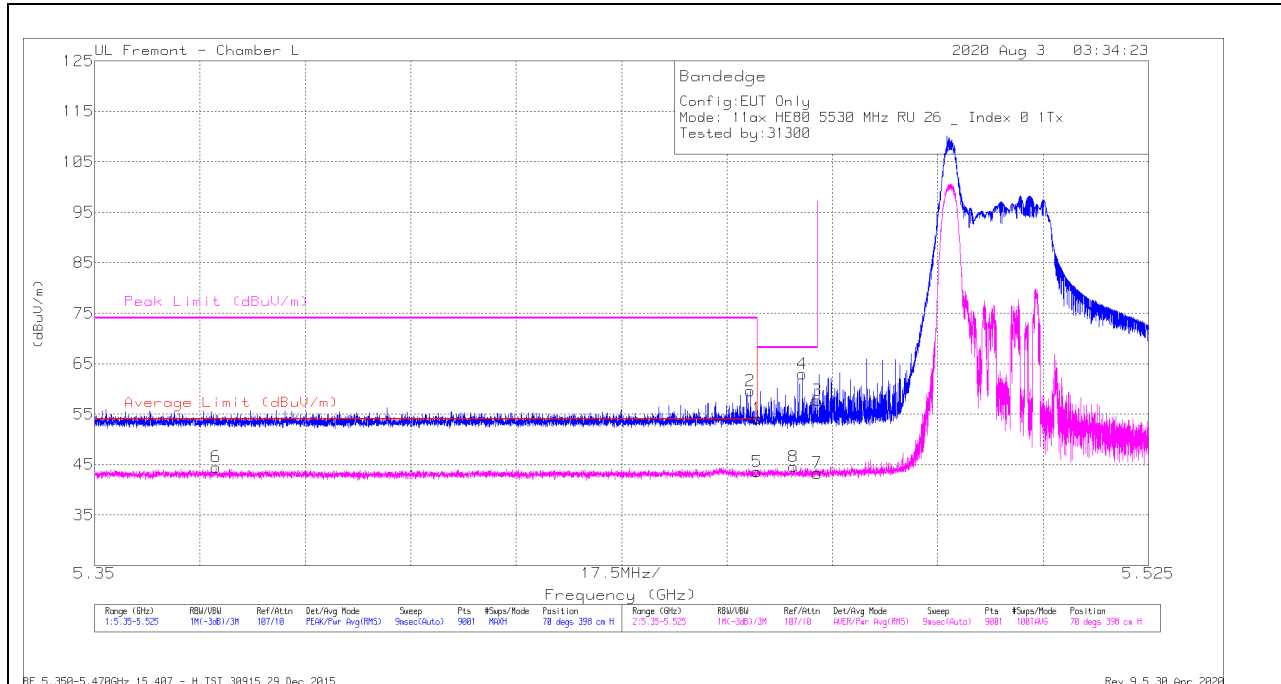

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Ampl/Chl/Ftr/Pwr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	38.47	Pk	34.6	-16.9	54.17	-	-	74	-19.83	70	398	H
2	* 5.45891	41.85	Pk	34.6	-16.9	59.55	-	-	74	-14.45	70	398	H
3	5.46999	40.06	Pk	34.6	-16.9	57.76	-	-	68.2	-10.44	70	398	H
4	5.46752	45.3	Pk	34.6	-16.9	63	-	-	68.2	-5.2	70	398	H
5	* 5.45999	25.71	RMS	34.6	-16.9	43.41	54	-10.59	-	-	70	398	H
6	* 5.37012	26.85	RMS	34.5	-17	44.35	54	-9.65	-	-	70	398	H
7	5.46999	25.41	RMS	34.6	-16.9	43.11	-	-	-	-	70	398	H
8	5.466	26.75	RMS	34.6	-16.9	44.45	-	-	-	-	70	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

UL Fremont - Chamber L

2020 Aug 3 03:59:24

Bandedge

Config: EUT Only

Mode: 11ax HE80 5530 MHz RU 26 _ Index 0 1Tx

Tested by: 31300

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

Frequency (GHz)

Range (GHz) 1: 5.35-5.525

RBW/VBW 1M-300/10M

Ref/Attn 101/10

Det/Avg Mode PWR/Prd Avg(MPS)

Sweep Rescan(Auto)

Pls 9801

#Saps/Mode 160/1

Position 52 degs 355 on U

Range (GHz) 2: 5.35-5.525

RBW/VBW 1M-300/10M

Ref/Attn 101/10

Det/Avg Mode AUCR/Prd Avg(MPS)

Sweep Rescan(Auto)

Pls 9801

#Saps/Mode 160/16s

Position 52 degs 355 on U

BE 5.350-5.4786GHz 15.407 - U.TST 30915 29 Dec 2015

Rev 9.5 30 Apr 2020


Marker	Frequency (GHz)	Master Reading (dBuV)	Det	AF 344 (dBm)	Amp(CMDF)/trP(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margn (dB)	Peak Limit (dBuV/m)	PK Margn (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	* 5.45999	35.81	Pk	34.6	-16.9	53.51	-	-	74	-20.49	52	395	V
2	* 5.45473	41.2	Pk	34.6	-16.9	58.59	-	-	74	-15.1	52	395	V
3	5.45999	35.23	Pk	34.6	-16.9	58.32	-	-	74	-15.28	52	395	V
4	5.46686	43.55	Pk	34.6	-16.9	61.25	-	-	68.2	-6.95	52	395	V
5	* 5.45999	25.64	RMS	34.6	-16.9	43.34	54	-10.66	-	-	52	395	V
6	* 5.42451	26.18	RMS	34.6	-16.9	43.88	54	-10.12	-	-	52	395	V
7	5.45999	25.46	RMS	34.6	-16.9	43.18	-	-	-	-	52	395	V
8	5.45999	23.05	RMS	34.6	-16.9	43.16	-	-	-	-	52	395	V
9	5.45999	23.05	RMS	34.6	-16.9	43.16	-	-	-	-	52	395	V

Page 243 of 393

1TX Antenna 6 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

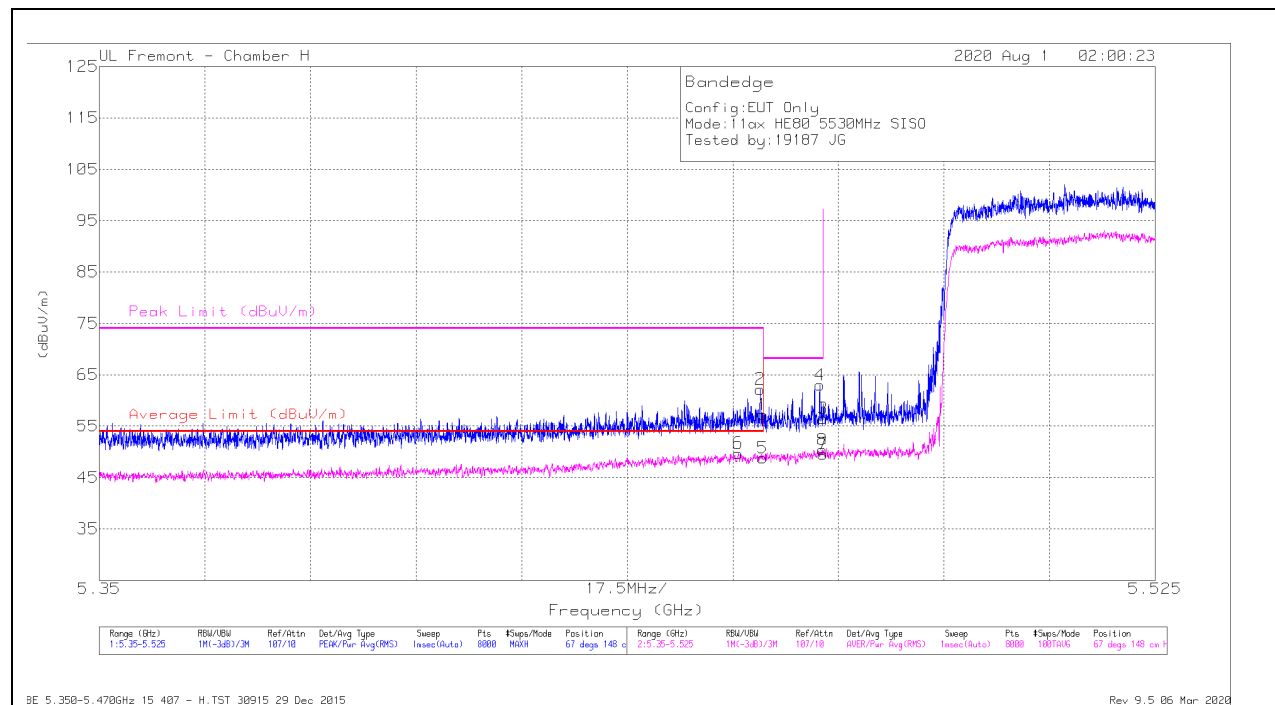

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dega)	Height (cm)	Polarity
1	* 5.45998	42.94	Pk	35.2	-20.9	57.24	-	-	74	-16.76	67	148	H
2	* 5.45952	47.87	Pk	35.2	-20.9	62.17	-	-	74	-11.83	67	148	H
5	* 5.45998	34.5	RMS	35.2	-20.9	48.8	54	-5.2	-	-	67	148	H
6	* 5.45589	35.32	RMS	35.3	-20.9	49.72	54	-4.28	-	-	67	148	H
4	5.46941	48.69	Pk	35.3	-21	62.99	-	-	68.2	-5.21	67	148	H
8	5.46987	36.1	RMS	35.3	-21	50.4	-	-	-	-	67	148	H
3	5.46998	42.21	Pk	35.3	-21	56.51	-	-	68.2	-11.69	67	148	H
7	5.46998	35.29	RMS	35.3	-21	49.59	-	-	-	-	67	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

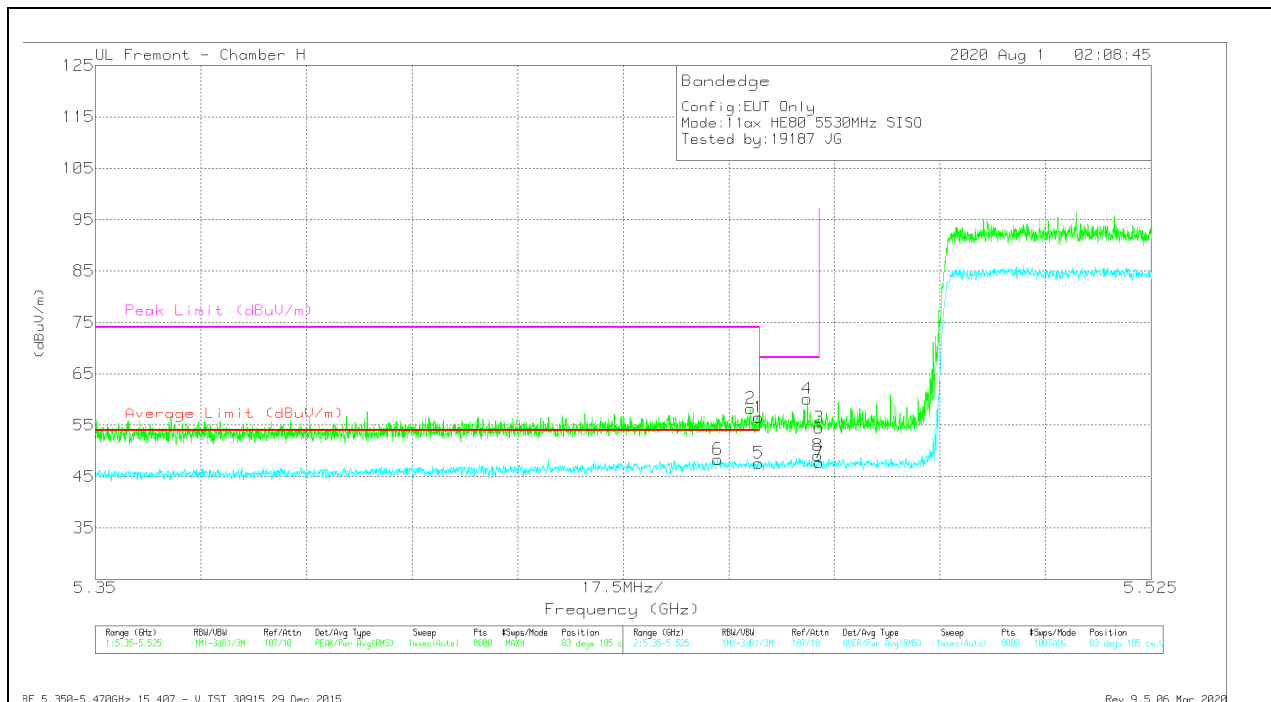

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.22	Pk	35.2	-20.9	56.52	-	-	74	-17.48	83	185	V
2	* 5.45858	43.84	Pk	35.3	-20.9	58.24	-	-	74	-15.76	83	185	V
5	* 5.45998	33.34	RMS	35.2	-20.9	47.64	54	-6.36	-	-	83	185	V
6	* 5.45315	34.04	RMS	35.2	-20.9	48.34	54	-5.66	-	-	83	185	V
4	5.46799	45.75	Pk	35.3	-20.9	60.15	-	-	68.2	-8.05	83	185	V
8	5.46976	34.8	RMS	35.3	-21	49.1	-	-	-	-	83	185	V
3	5.46998	40.23	Pk	35.3	-21	54.53	-	-	68.2	-13.67	83	185	V
7	5.46998	33.42	RMS	35.3	-21	47.72	-	-	-	-	83	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

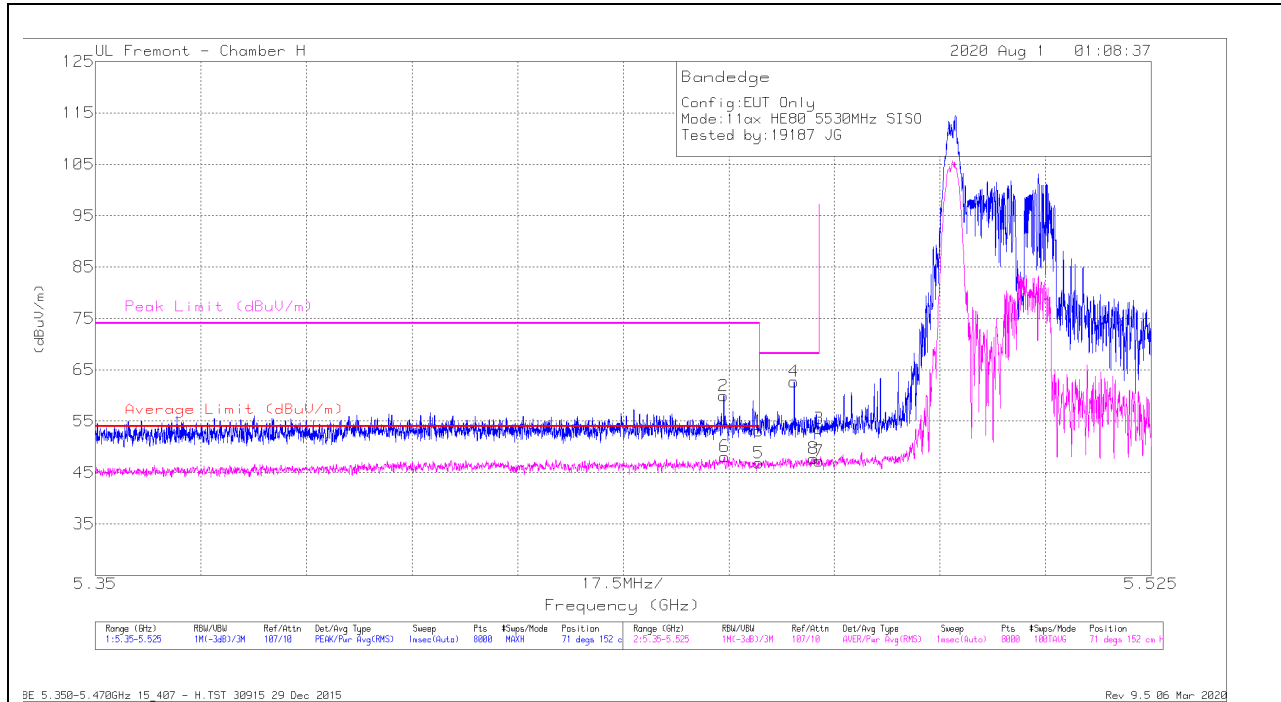

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	38.77	Pk	35.2	-20.9	53.07	-	-	74	-20.93	71	152	H
2	* 5.45414	45.64	Pk	35.2	-20.9	59.94	-	-	74	-14.06	71	152	H
5	* 5.45998	32.53	RMS	35.2	-20.9	46.83	54	-7.17	-	-	71	152	H
6	* 5.45429	33.79	RMS	35.2	-20.9	48.09	54	-5.91	-	-	71	152	H
4	5.46582	48.4	Pk	35.2	-20.9	62.7	-	-	68.2	-5.5	71	152	H
8	5.46906	33.44	RMS	35.3	-21	47.74	-	-	-	-	71	152	H
3	5.46998	39.26	Pk	35.3	-21	53.56	-	-	68.2	-14.64	71	152	H
7	5.46998	32.9	RMS	35.3	-21	47.2	-	-	-	-	71	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

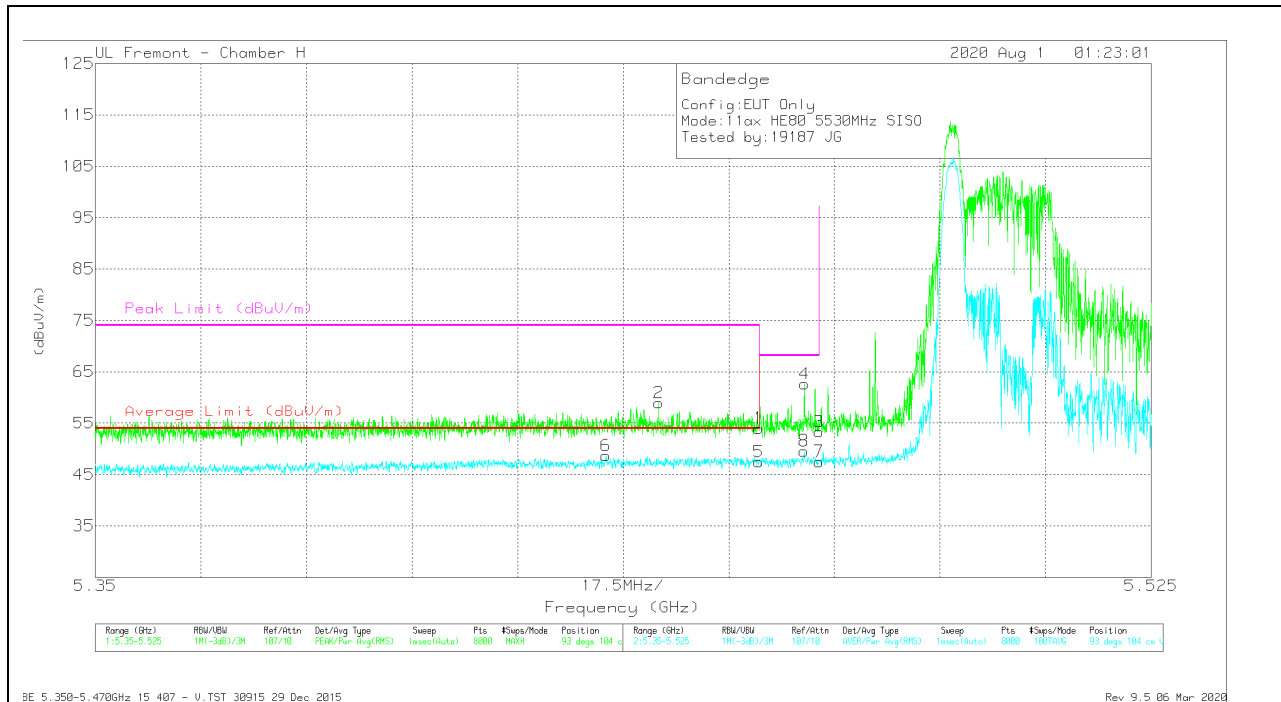


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.68	Pk	35.2	-20.9	53.98	-	-	74	-20.02	93	104	V
2	* 5.44338	44.66	Pk	35.1	-20.8	58.96	-	-	74	-15.04	93	104	V
5	* 5.45998	33.16	RMS	35.2	-20.9	47.46	54	-6.54	-	-	93	104	V
6	* 5.43465	34.38	RMS	35.1	-20.8	48.68	54	-5.32	-	-	93	104	V
8	5.46744	35.16	RMS	35.3	-20.9	49.56	-	-	-	-	93	104	V
4	5.46753	48.23	Pk	35.3	-20.9	62.63	-	-	68.2	-5.57	93	104	V
3	5.46998	39.03	Pk	35.3	-21	53.33	-	-	68.2	-14.87	93	104	V
7	5.46998	33.19	RMS	35.3	-21	47.49	-	-	-	-	93	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

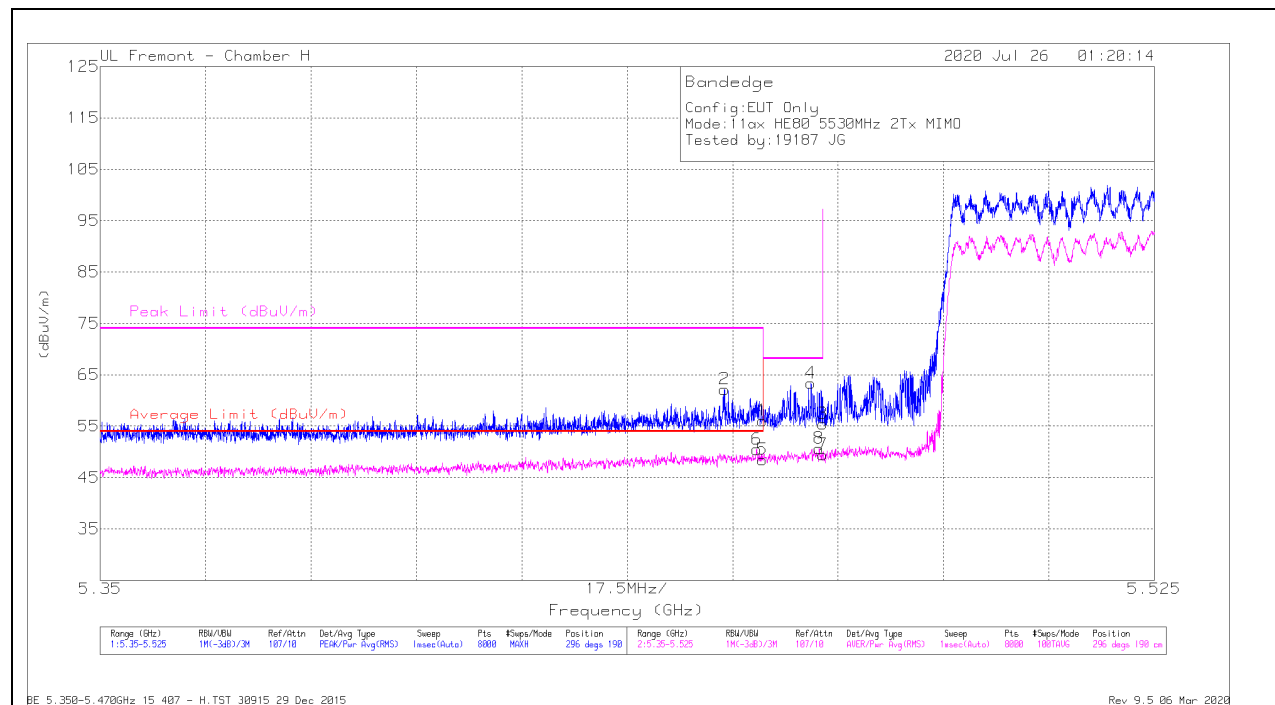

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TSE3 (dBm)	Amp/CM/Filt/Pad (dB)	Corrected Reading (dBuV)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.78	Pk	35.2	-20.9	56.08	-	-	74	-17.92	296	190	H
2	* 5.45364	47.9	Pk	35.2	-20.9	62.2	-	-	74	-11.8	296	190	H
5	* 5.45998	33.73	RMS	35.2	-20.9	48.03	54	-5.97	-	-	296	190	H
6	* 5.45897	35.62	RMS	35.3	-20.9	50.02	54	-3.98	-	-	296	190	H
4	5.46801	48.99	Pk	35.3	-20.9	63.39	-	-	68.2	-4.81	296	190	H
8	5.46937	35.93	RMS	35.3	-21	50.23	-	-	-	-	296	190	H
3	5.46926	41.17	Pk	35.3	-21	55.47	-	-	68.2	-12.73	296	190	H
7	5.46998	34.67	RMS	35.3	-21	48.97	-	-	-	-	296	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

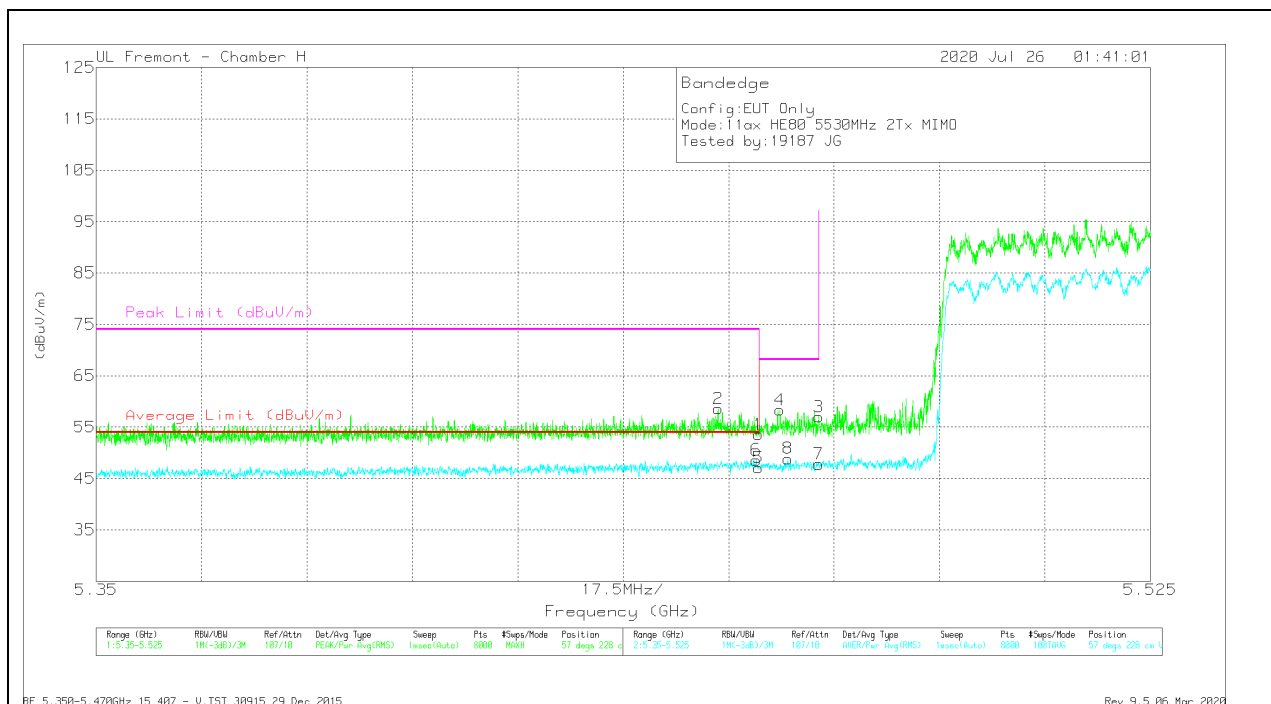



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.26	Pk	35.2	-20.9	53.56	-	-	74	-20.44	57	228	V
2	* 5.45324	44.29	Pk	35.2	-20.9	58.59	-	-	74	-15.41	57	228	V
5	* 5.46998	32.31	RMS	35.2	-20.9	46.61	54	-7.39	-	-	57	228	V
6	* 5.45959	33.82	RMS	35.2	-20.9	46.12	54	-5.88	-	-	57	228	V
4	5.4635	44.05	Pk	35.2	-20.9	58.35	-	-	68.2	-9.85	57	228	V
8	5.46484	34.1	RMS	35.2	-20.9	48.4	-	-	-	-	57	228	V
3	5.46998	42.69	Pk	35.3	-21	56.99	-	-	68.2	-11.21	57	228	V
7	5.46998	33.03	RMS	35.3	-21	47.33	-	-	-	-	57	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

996 Tones, RU Index 67 RESULTS

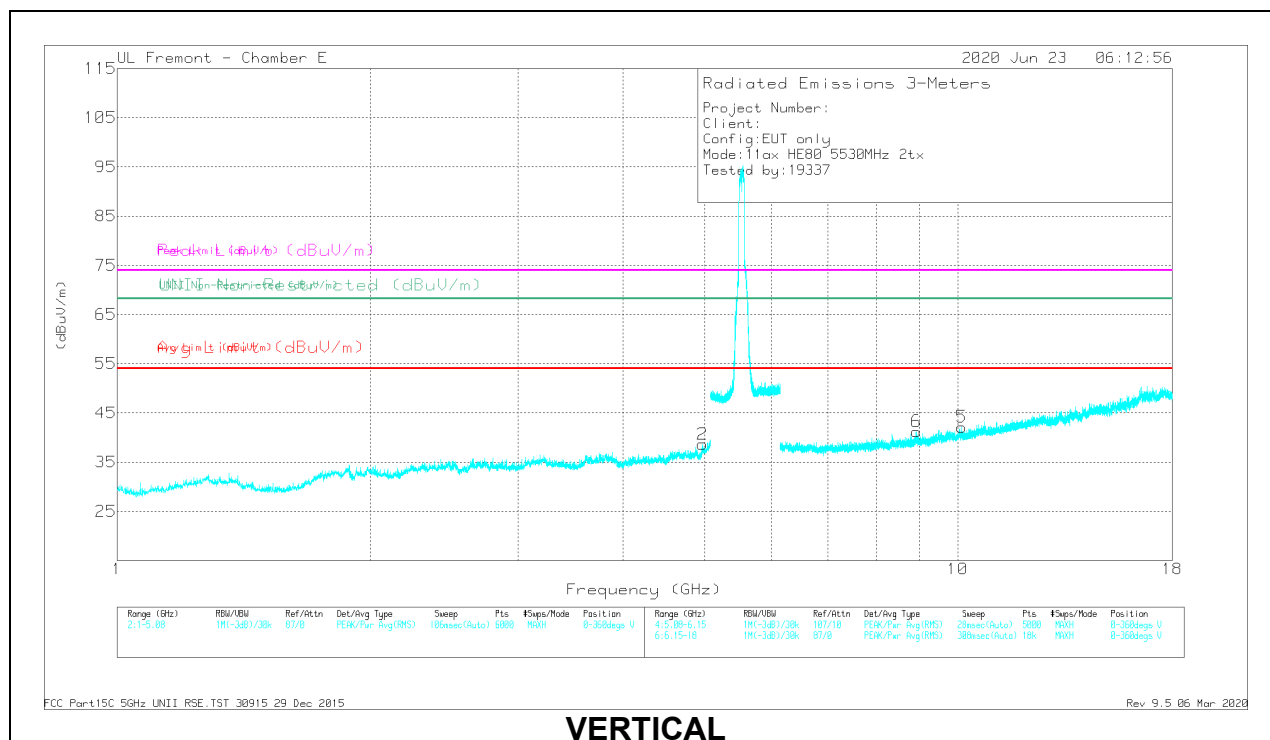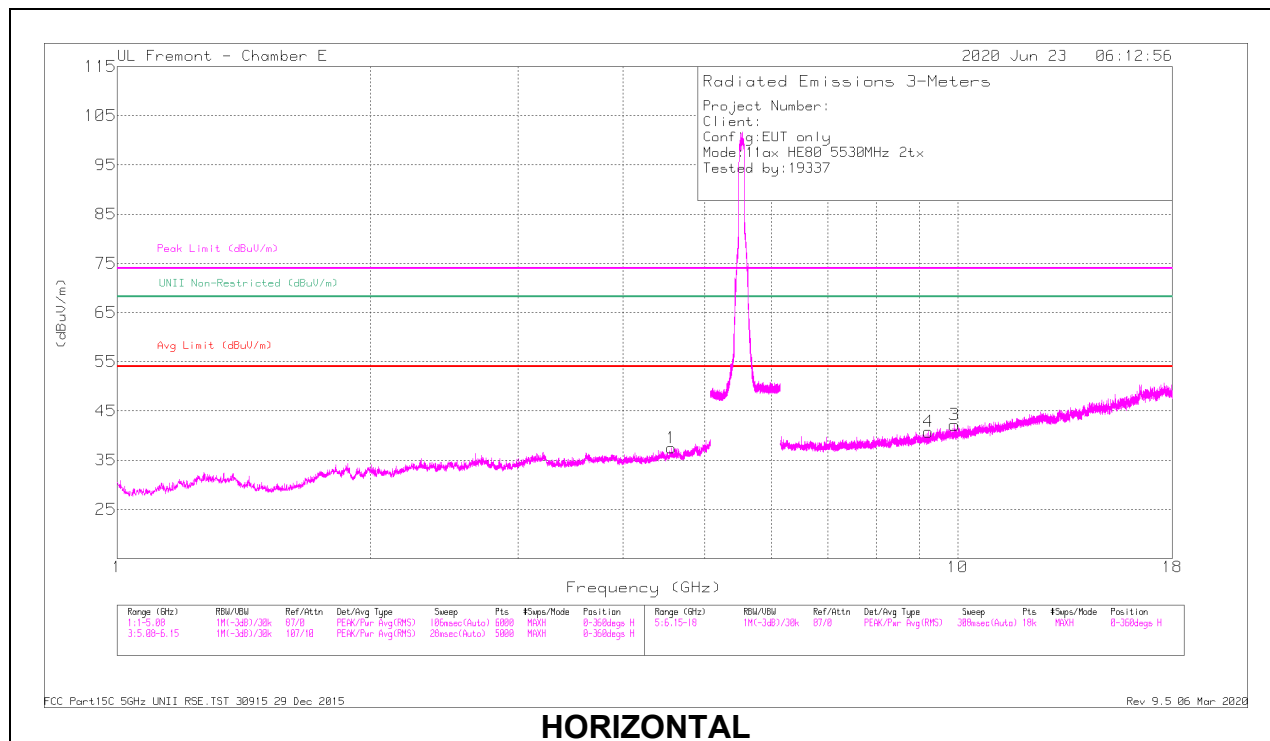

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbf/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.56711	42.11	PK-U	34.2	-31.9	44.41	-	-	74	-29.59	-	-	290	142	H
	* 4.56514	30.22	ADR	34.2	-31.9	32.52	54	-21.48	-	-	-	-	290	142	H
2	* 4.96966	41.7	PK-U	34.2	-30.1	45.8	-	-	74	-28.2	-	-	18	157	V
	* 4.97026	29.98	ADR	34.2	-30	34.18	54	-19.82	-	-	-	-	18	157	V
6	8.93325	36.99	PK-U	36.1	-25.7	47.39	-	-	-	-	68.2	-20.81	130	163	V
	8.93457	25.1	ADR	36.1	-25.7	35.5	-	-	-	-	-	-	130	163	V
4	9.22098	36.14	PK-U	36.2	-26.1	46.24	-	-	-	-	68.2	-21.96	305	174	H
	9.223	25.07	ADR	36.2	-26.1	35.17	-	-	-	-	-	-	305	174	H
3	9.90903	38.5	PK-U	36.9	-26.4	49	-	-	-	-	68.2	-19.2	351	219	H
	9.91127	25.84	ADR	37	-26.4	36.44	-	-	-	-	-	-	351	219	H
5	10.10683	25.6	ADR	36.9	-26	36.5	-	-	-	-	-	-	73	202	V
	10.10762	37.84	PK-U	36.9	-26	48.74	-	-	-	-	68.2	-19.46	73	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE –MCS 11, 26 Tones, RU Index 36

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

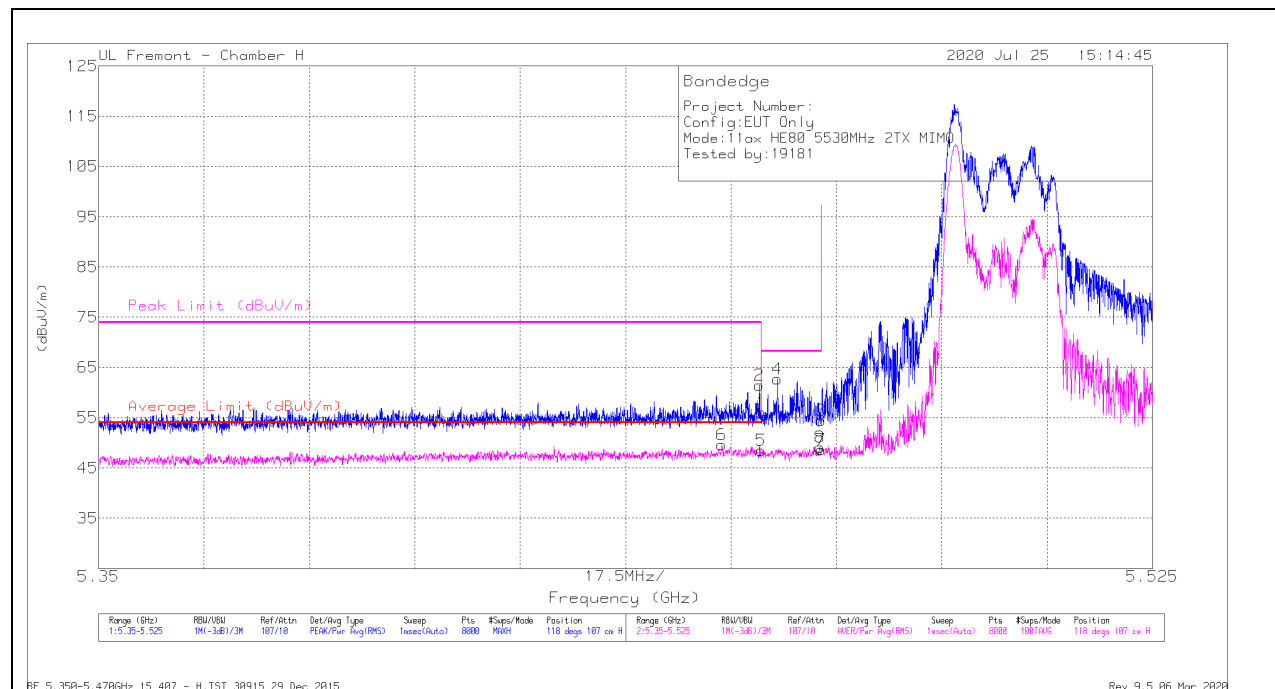

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dBm)	Amp/Cal/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.85	Pk	35.2	-20.9	56.15	-	-	74	-17.85	118	107	H
2	* 5.45972	47.21	Pk	35.2	-20.9	61.51	-	-	74	-12.49	118	107	H
5	* 5.45998	33.78	RMS	35.2	-20.9	48.08	54	-5.92	-	-	118	107	H
6	* 5.45348	34.81	RMS	35.2	-20.9	49.11	54	-4.89	-	-	118	107	H
4	5.46272	48.42	Pk	35.2	-20.9	62.72	-	-	68.2	-5.48	118	107	H
8	5.46974	34.38	RMS	35.3	-21	46.68	-	-	68.2	-	118	107	H
3	5.46998	40.22	Pk	35.3	-21	54.52	-	-	-	-13.68	118	107	H
7	5.46998	33.83	RMS	35.3	-21	48.13	-	-	-	-	118	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT


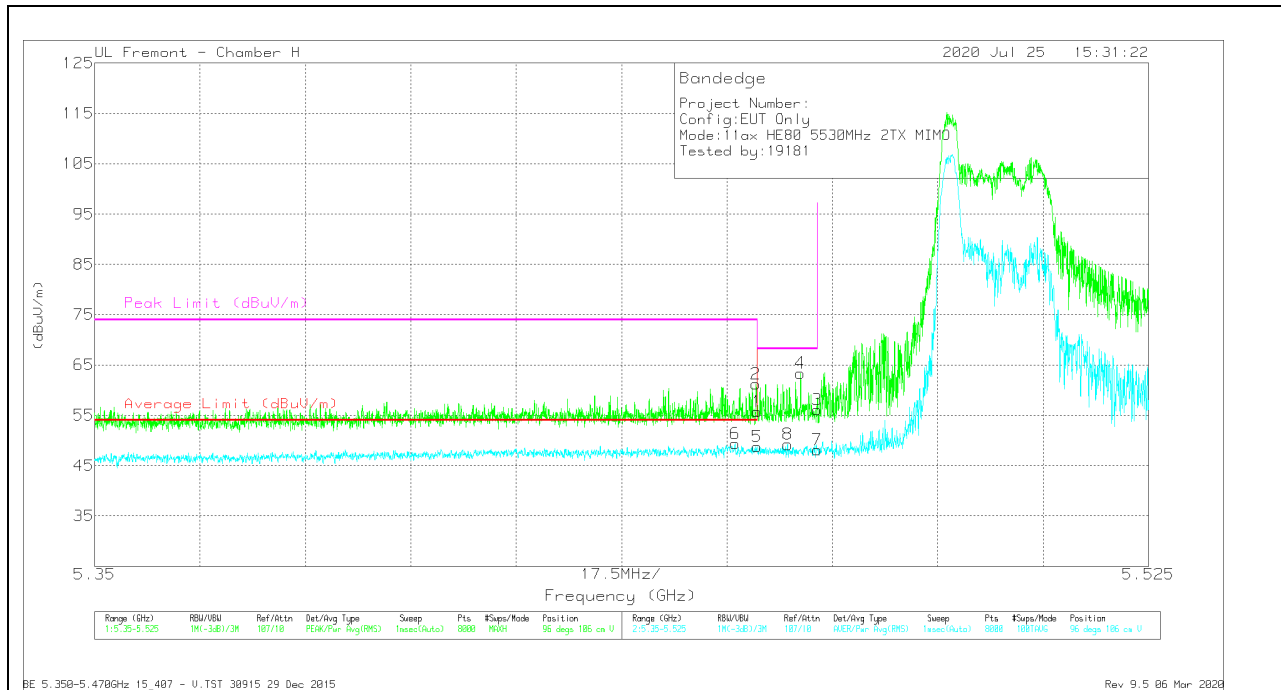


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AUT (dBm)	Amp/CBI/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.45998	41.48	Pk	35.2	-20.9	55.78	-	-	74	-18.22	95	106	V
2	* 5.45983	46.87	Pk	35.2	-20.9	61.17	-	-	74	-12.83	95	106	V
5	* 5.45998	33.95	RMS	35.2	-20.9	48.25	54	-5.75	-	-	95	106	V
6	* 5.45935	34.52	RMS	35.3	-20.9	48.92	54	-5.08	-	-	95	106	V
8	5.46506	34.43	RMS	35.2	-20.9	48.73	-	-	-	-	95	106	V
4	5.4672	49	Pk	35.3	-20.9	63.4	-	-	68.2	-4.8	95	106	V
3	5.46998	41.78	Pk	35.3	-21	56.08	-	-	68.2	-12.12	95	106	V
7	5.46998	33.31	RMS	35.3	-21	47.61	-	-	-	-	95	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 36 RESULTS

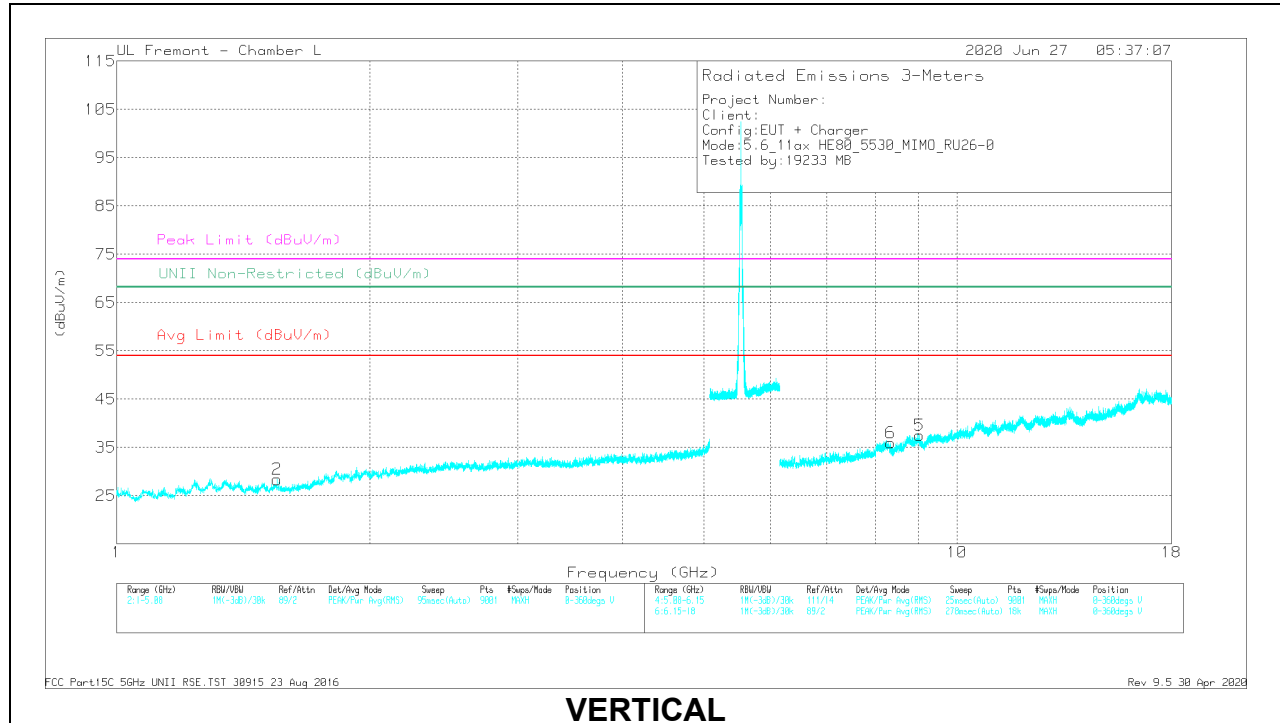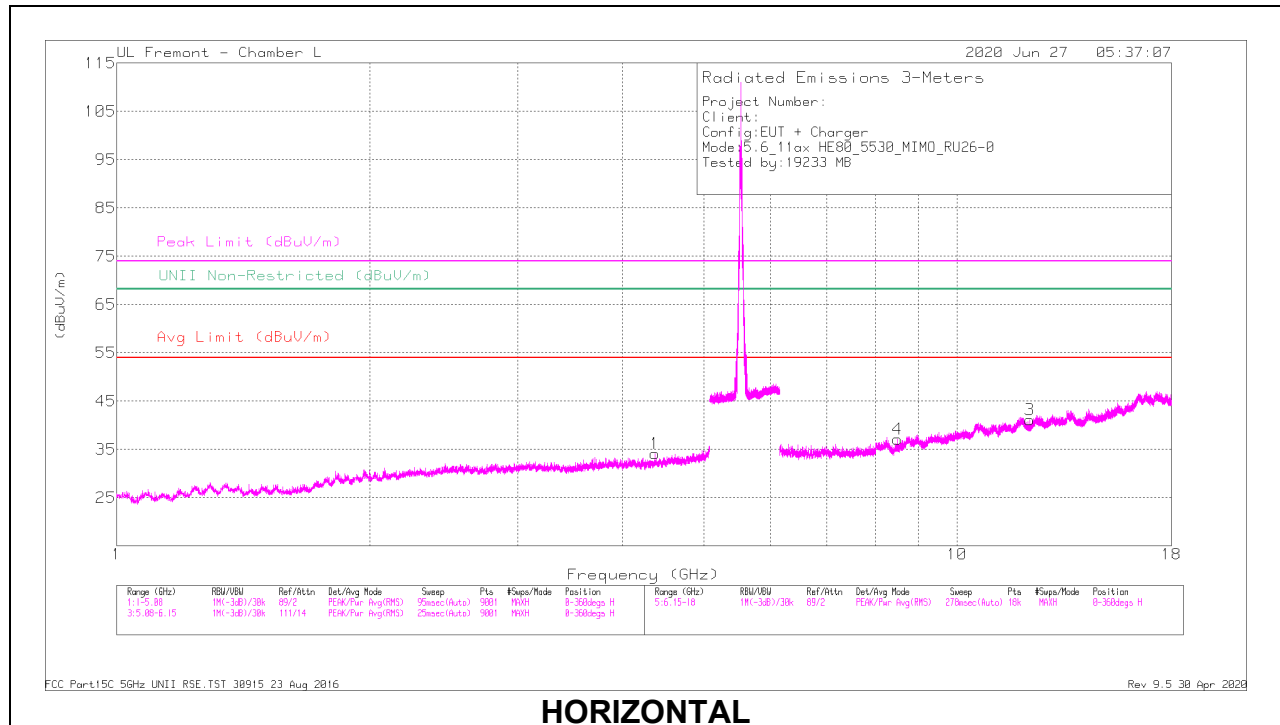

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.37383	35.91	PK-U	33.6	-27	42.51	-	-	74	-31.49	-	-	10	226	H
	* 4.3757	26.04	ADR	33.6	-27	32.64	54	-21.36	-	-	-	-	10	226	H
2	* 1.55088	40.27	PK-U	28.1	-32.2	36.17	-	-	74	-37.83	-	-	176	351	V
	* 1.55084	29.78	ADR	28.1	-32.2	25.68	54	-28.32	-	-	-	-	176	351	V
3	* 12.20824	29.83	PK-U	38.9	-19.9	48.83	-	-	74	-25.17	-	-	43	355	H
	* 12.20856	19.19	ADR	38.9	-19.9	38.19	54	-15.81	-	-	-	-	43	355	H
4	* 8.49505	30.43	PK-U	35.8	-21.2	45.03	-	-	74	-28.97	-	-	11	359	H
	* 8.49675	20.26	ADR	35.8	-21.2	34.86	54	-19.14	-	-	-	-	11	359	H
5	* 9.02292	30.65	PK-U	36.1	-20.7	46.05	-	-	74	-27.95	-	-	116	359	V
	* 9.02612	20.24	ADR	36.1	-20.7	35.64	54	-18.36	-	-	-	-	116	359	V
6	* 8.33336	31.65	PK-U	35.7	-22.2	45.15	-	-	74	-28.85	-	-	278	353	V
	* 8.33309	21.36	ADR	35.7	-22.2	34.86	54	-19.14	-	-	-	-	278	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.19. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX Antenna 5 MODE, MCS 9

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

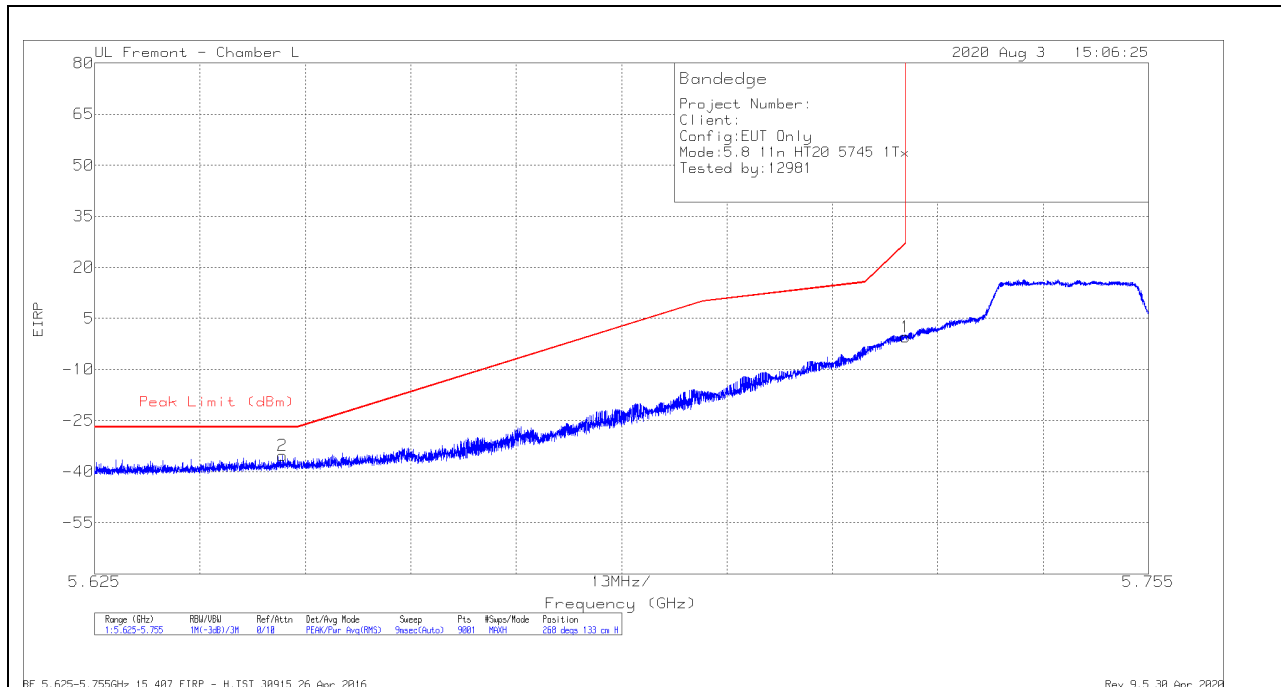

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-30.4	Pk	34.7	-16.6	11.8	-5	26.99	-27.49	268	133	H
2	5.6482	-65.19	Pk	34.7	-16.6	11.8	-35.29	-27	-8.29	268	133	H

Pk - Peak detector

VERTICAL RESULT

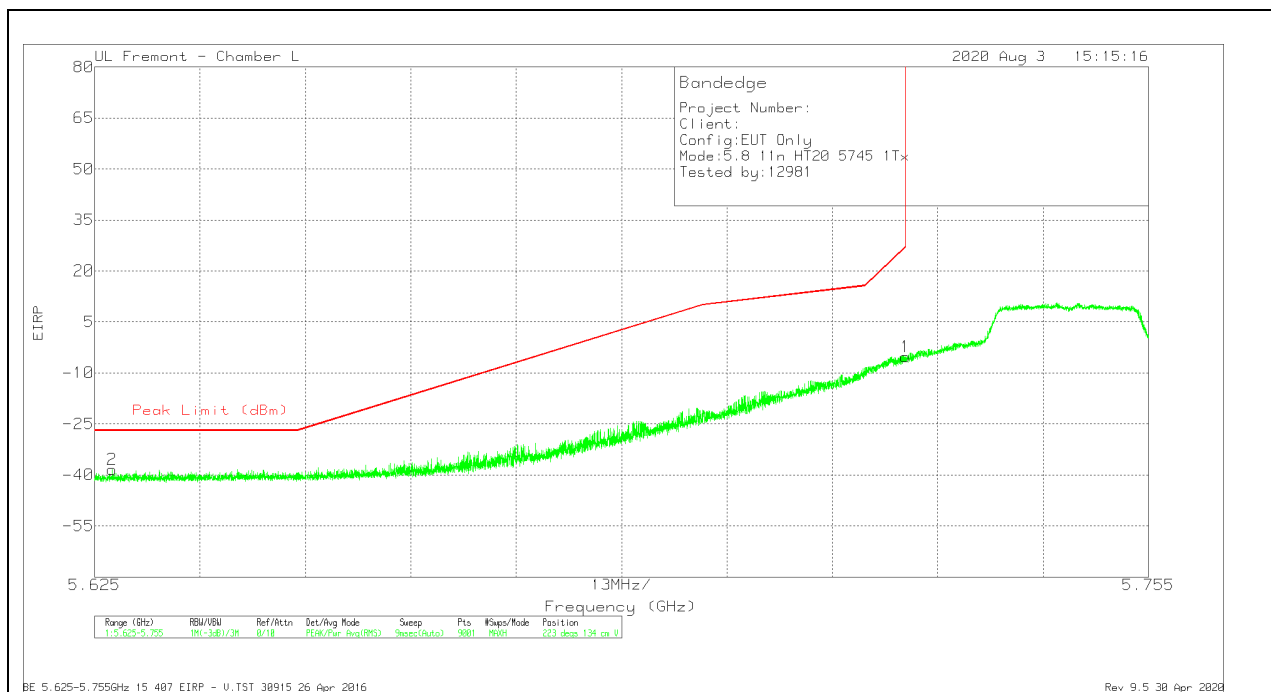


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.06	Pk	34.7	-16.6	11.8	-5.16	26.99	-32.15	223	134	V
2	5.62718	-68.44	Pk	34.8	-16.6	11.8	-38.44	-27	-11.44	223	134	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

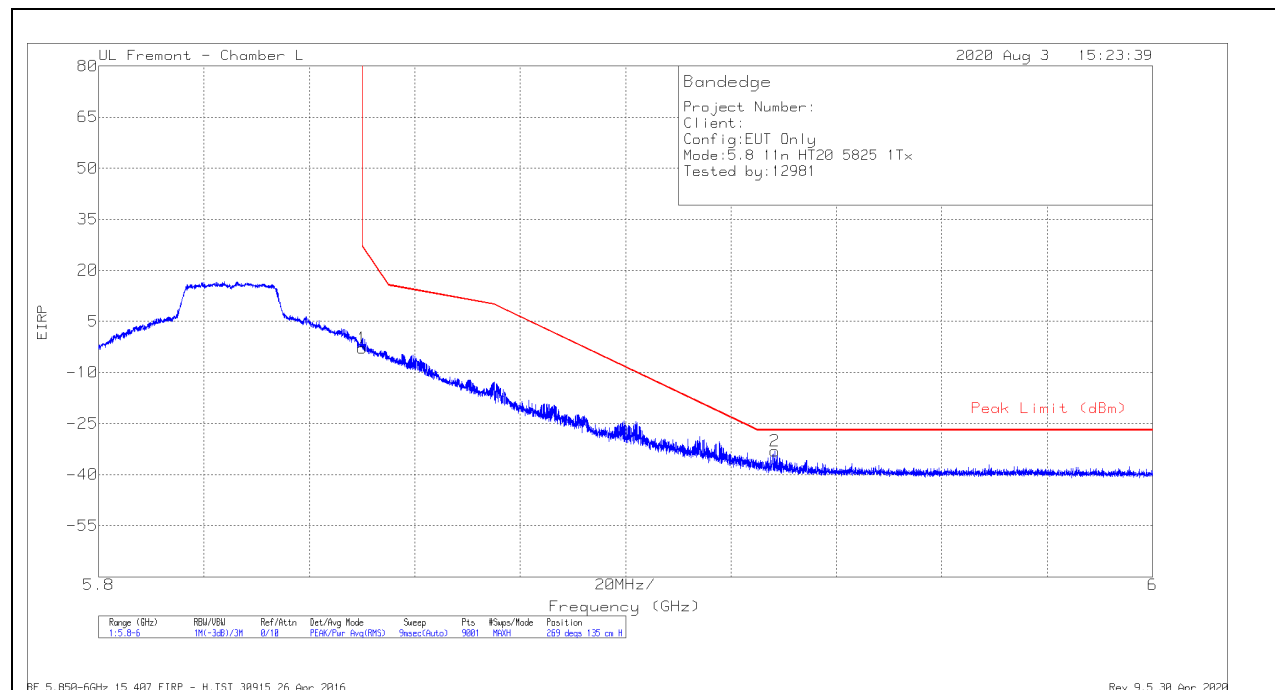

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-32.95	Pk	35	-16.7	11.8	-2.85	26.95	-29.8	269	135	H
2	5.92829	-63.71	Pk	35.2	-16.3	11.8	-33.01	-27	-6.01	269	135	H

Pk - Peak detector

VERTICAL RESULT

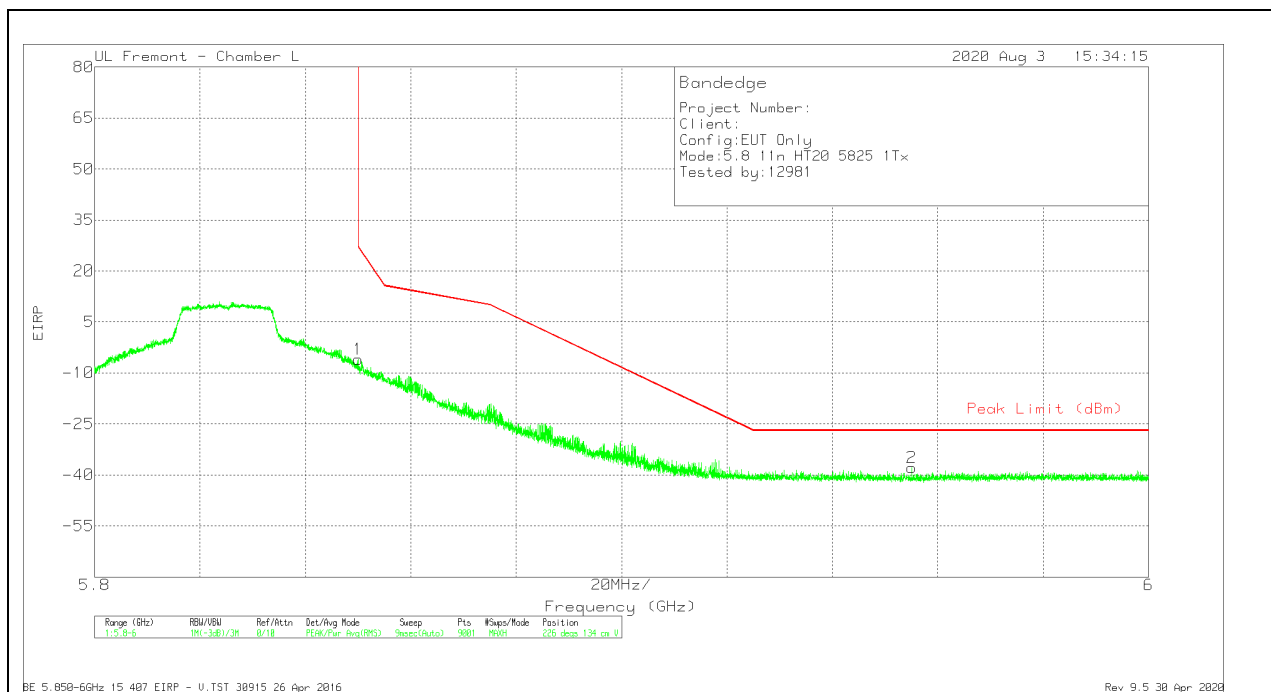


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-36.03	Pk	35	-16.7	11.8	-5.93	26.95	-32.88	226	134	V
2	5.95507	-68.7	Pk	35.2	-16.2	11.8	-37.9	-27	-10.9	226	134	V

Pk - Peak detector

1TX Antenna 6 MODE, MCS 7

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

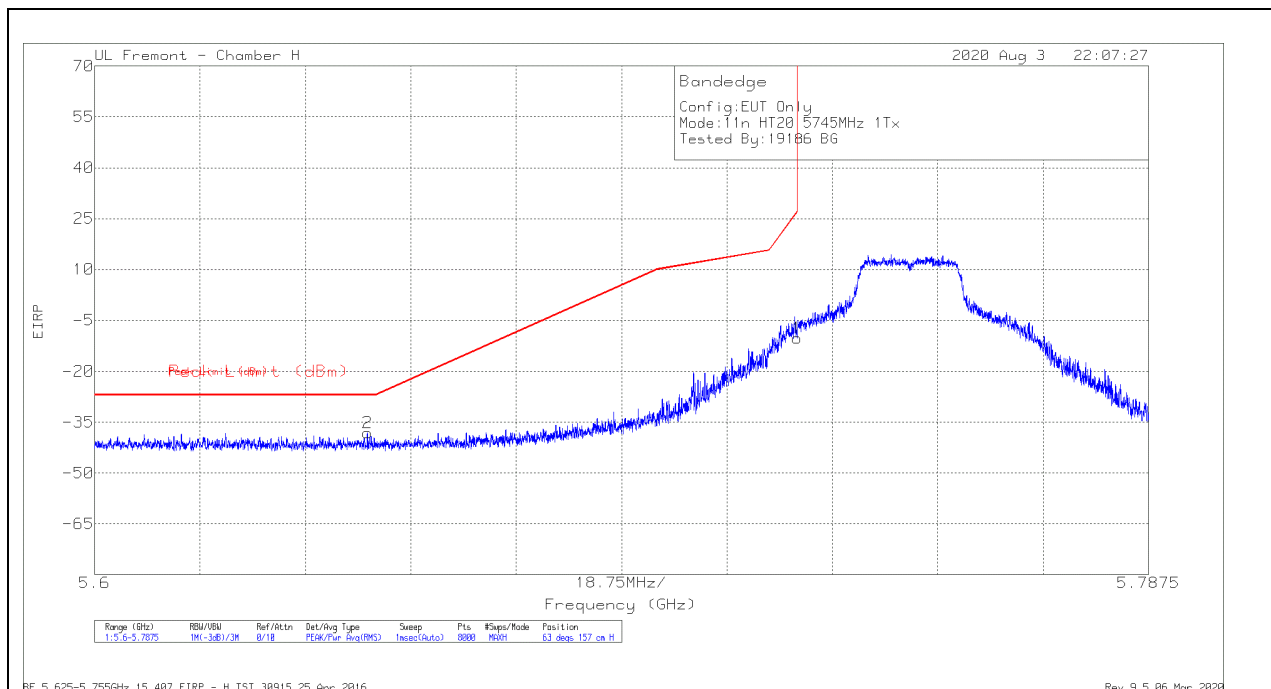

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64852	-64.07	Pk	35.1	-21	11.8	0	-38.17	-27	-11.17	63	157	H
1	5.72498	-35.84	Pk	35	-21.1	11.8	0	-10.14	26.96	-37.1	63	157	H

Pk - Peak detector

VERTICAL RESULT

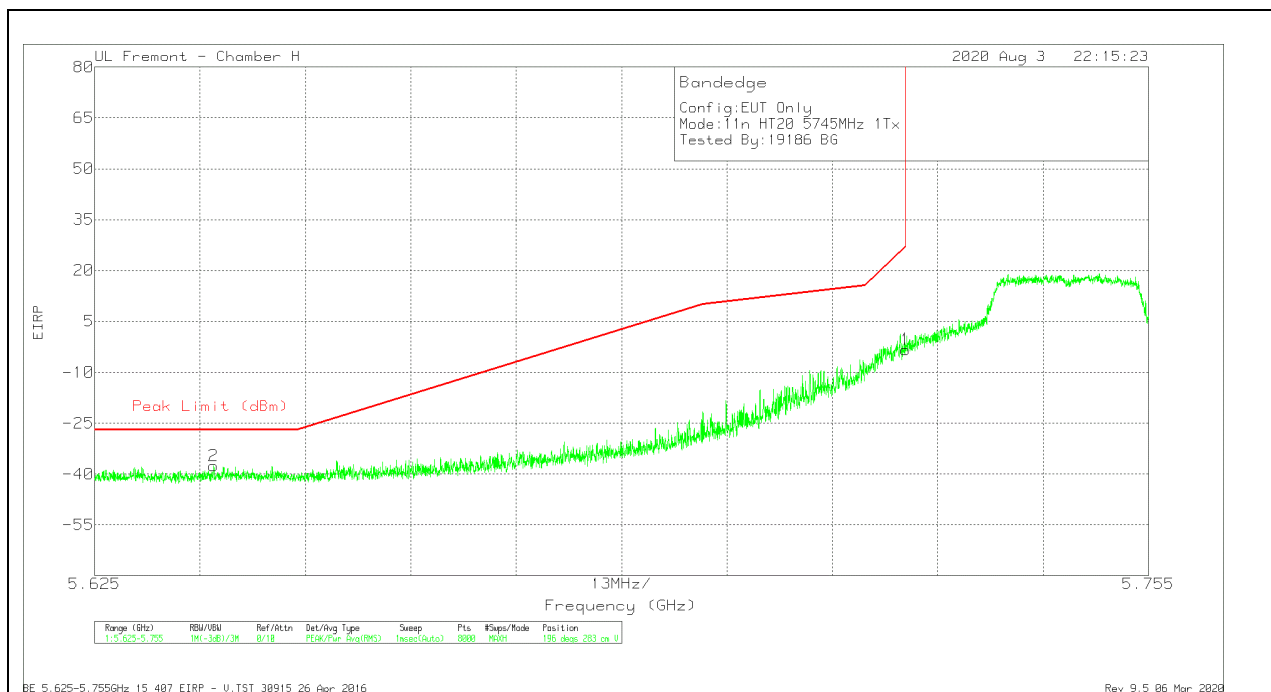


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63969	-63.61	Pk	35.2	-21	11.8	0	-37.61	-27	-10.61	196	283	V
1	5.725	-28.96	Pk	35	-21.1	11.8	0	-3.26	27	-30.26	196	283	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

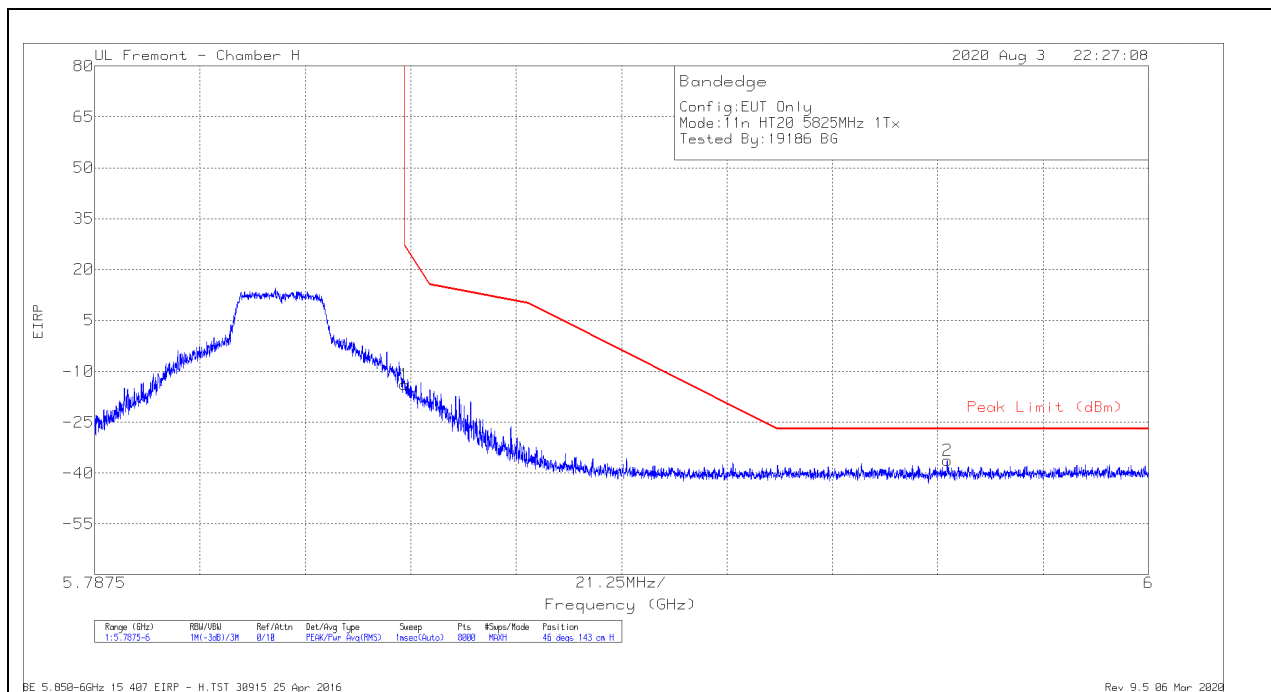

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-39.94	Pk	35	-20.7	11.8	0	-13.84	26.98	-40.82	46	143	H
2	5.95944	-62.96	Pk	35.1	-20.2	11.8	0	-36.26	-27	-9.26	46	143	H

Pk - Peak detector