



8.5.6. LTE BAND 14




8.5.7. LTE BAND 17

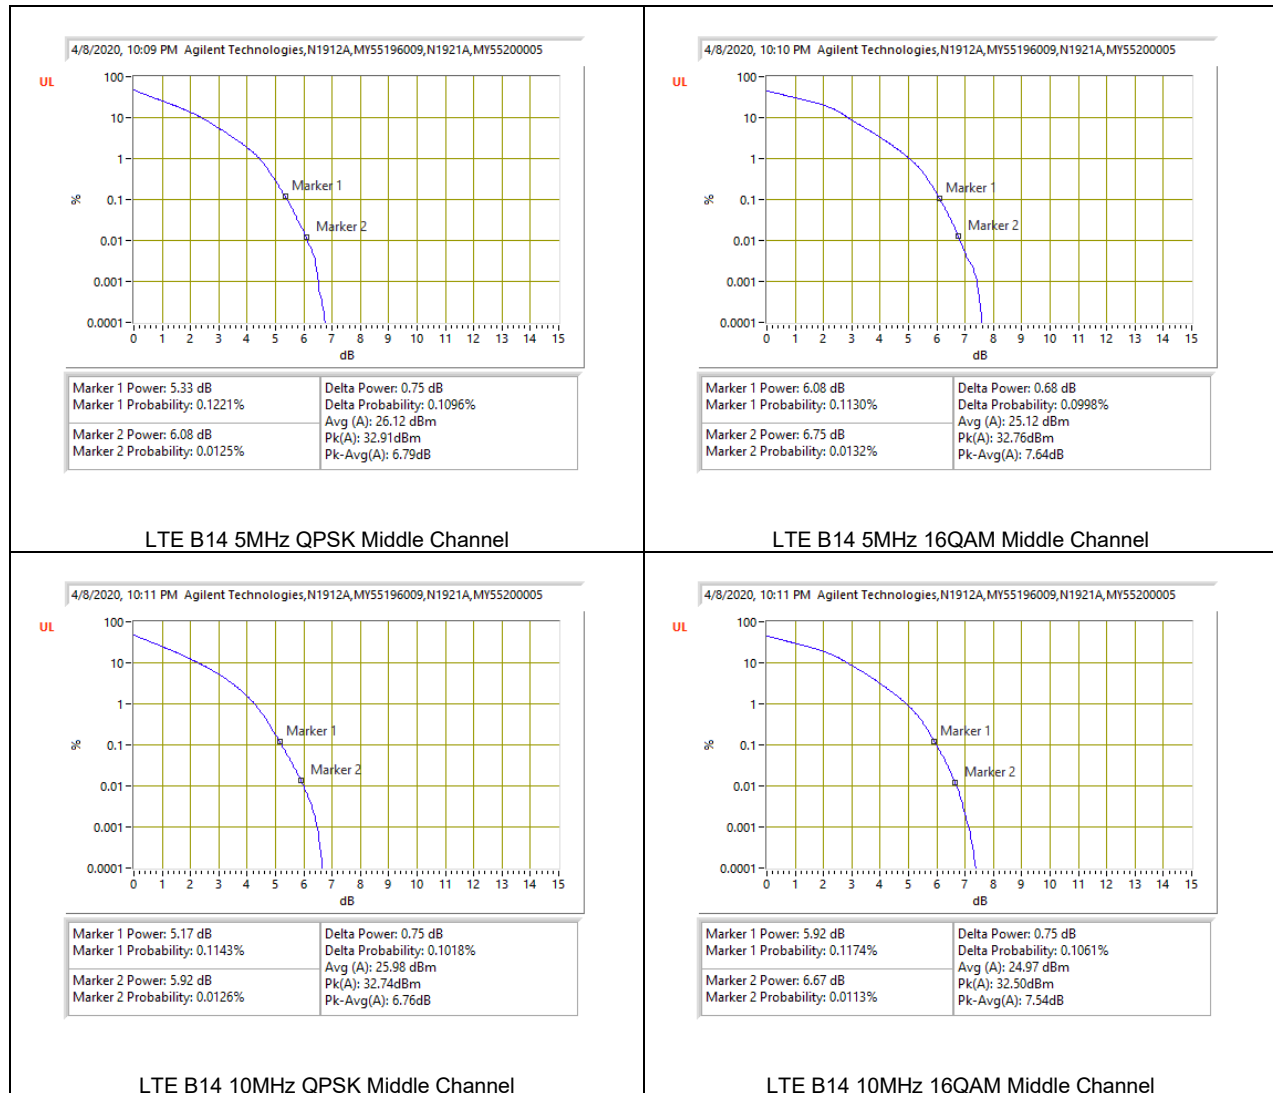



8.5.8. LTE BAND 25

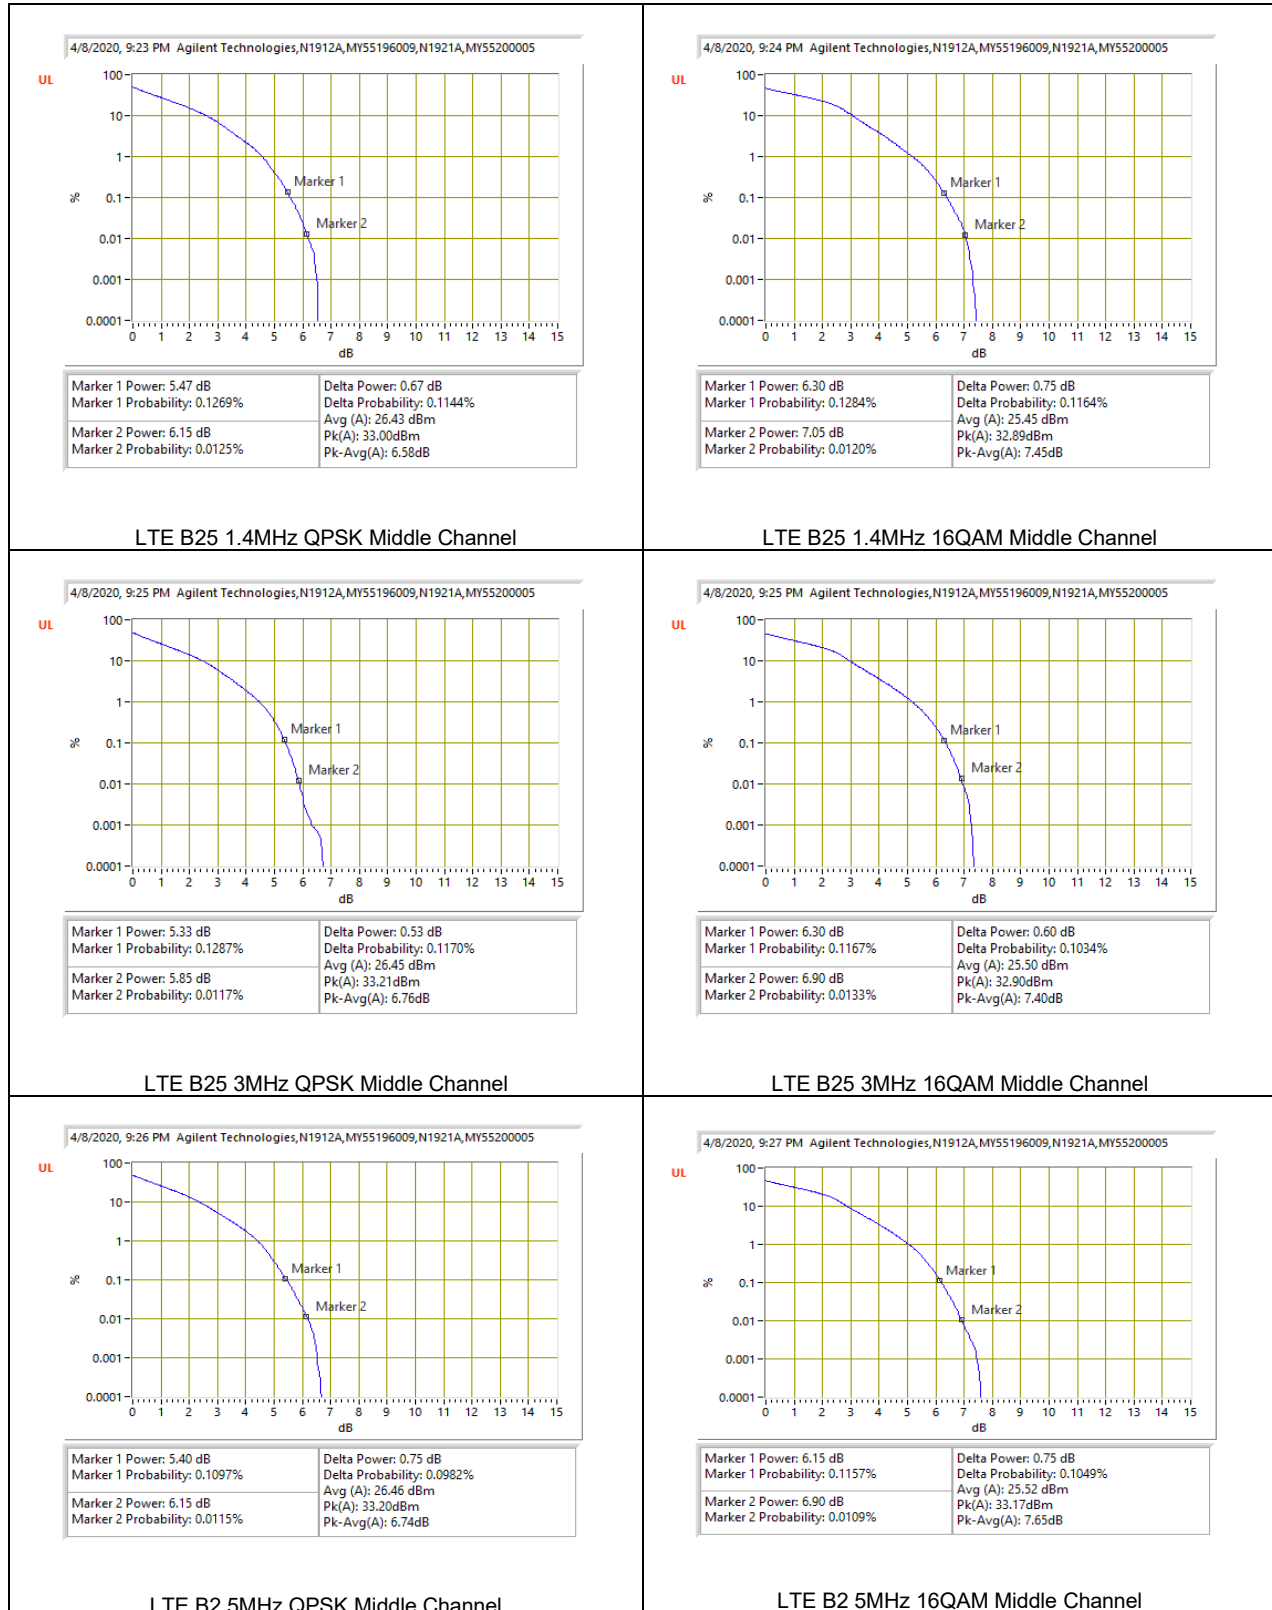

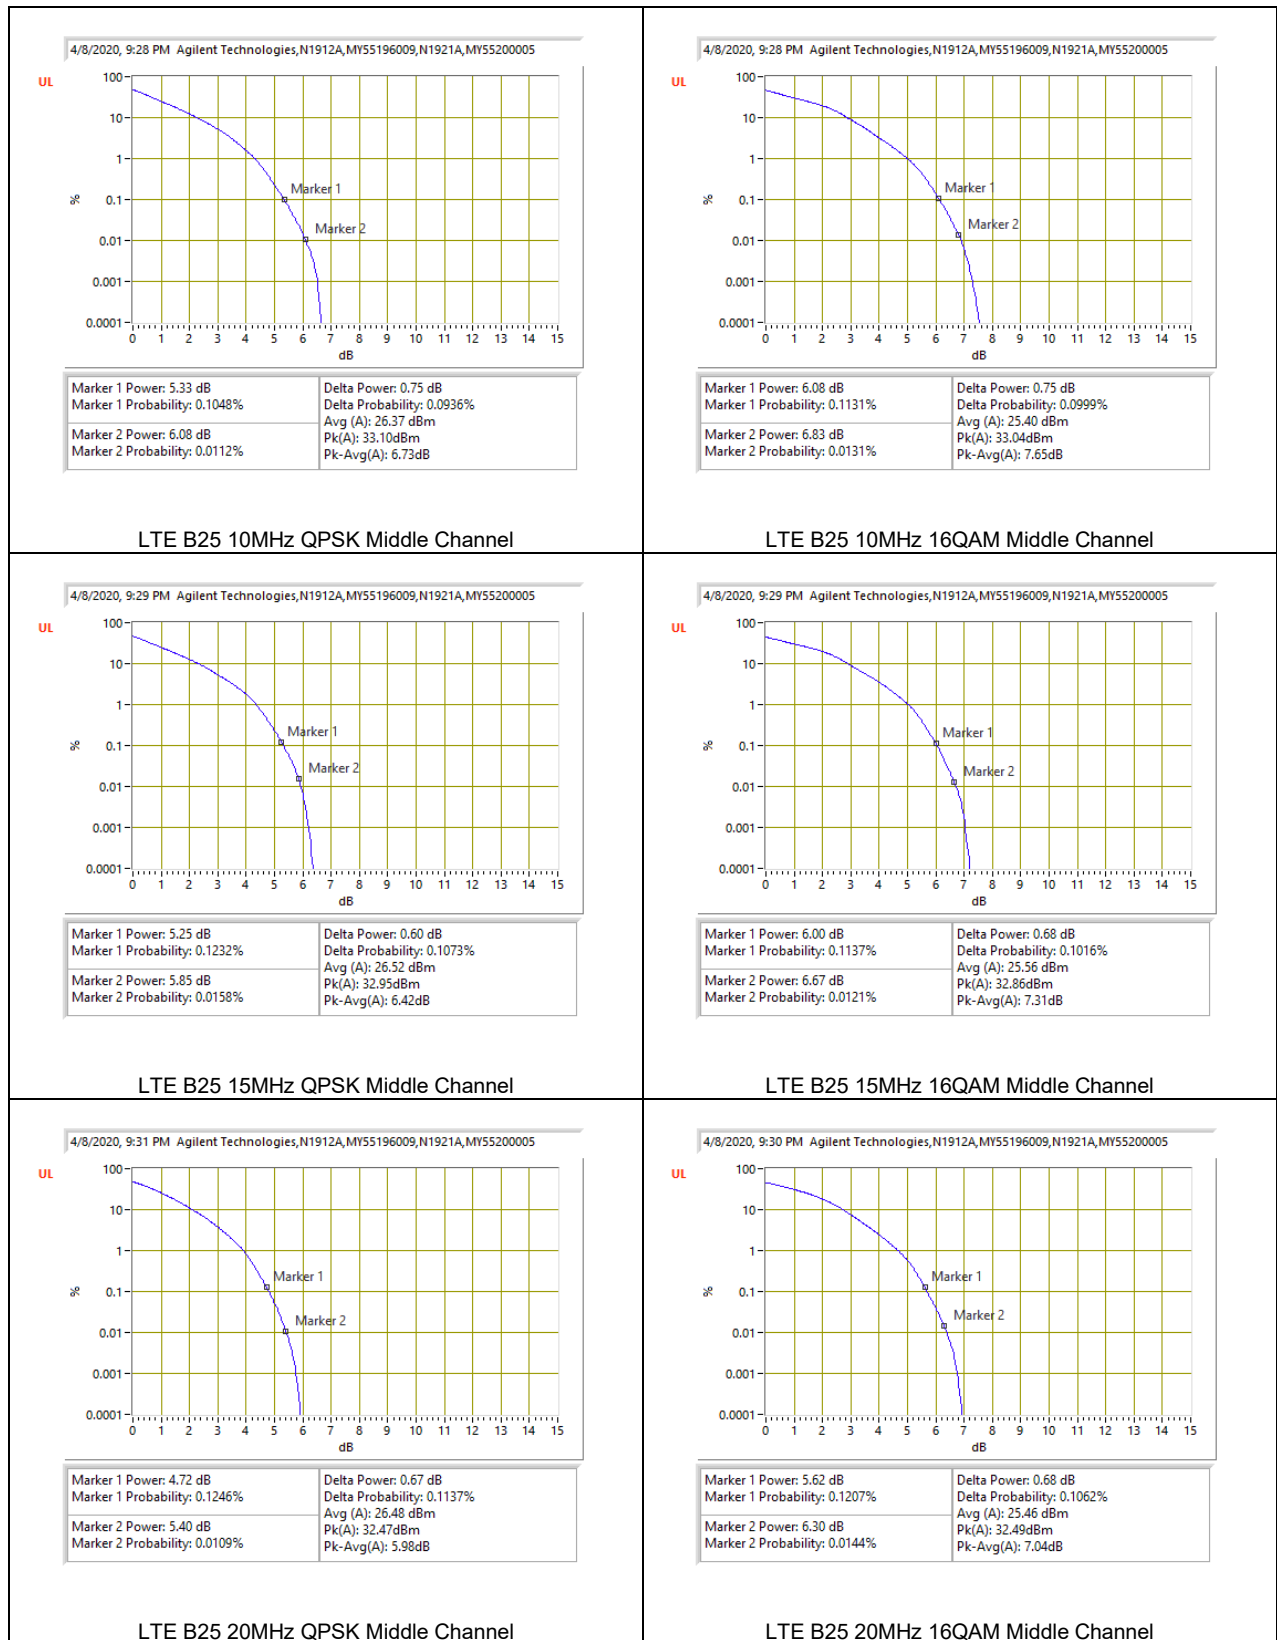


8.5.9. LTE BAND 26 (PART 90S)

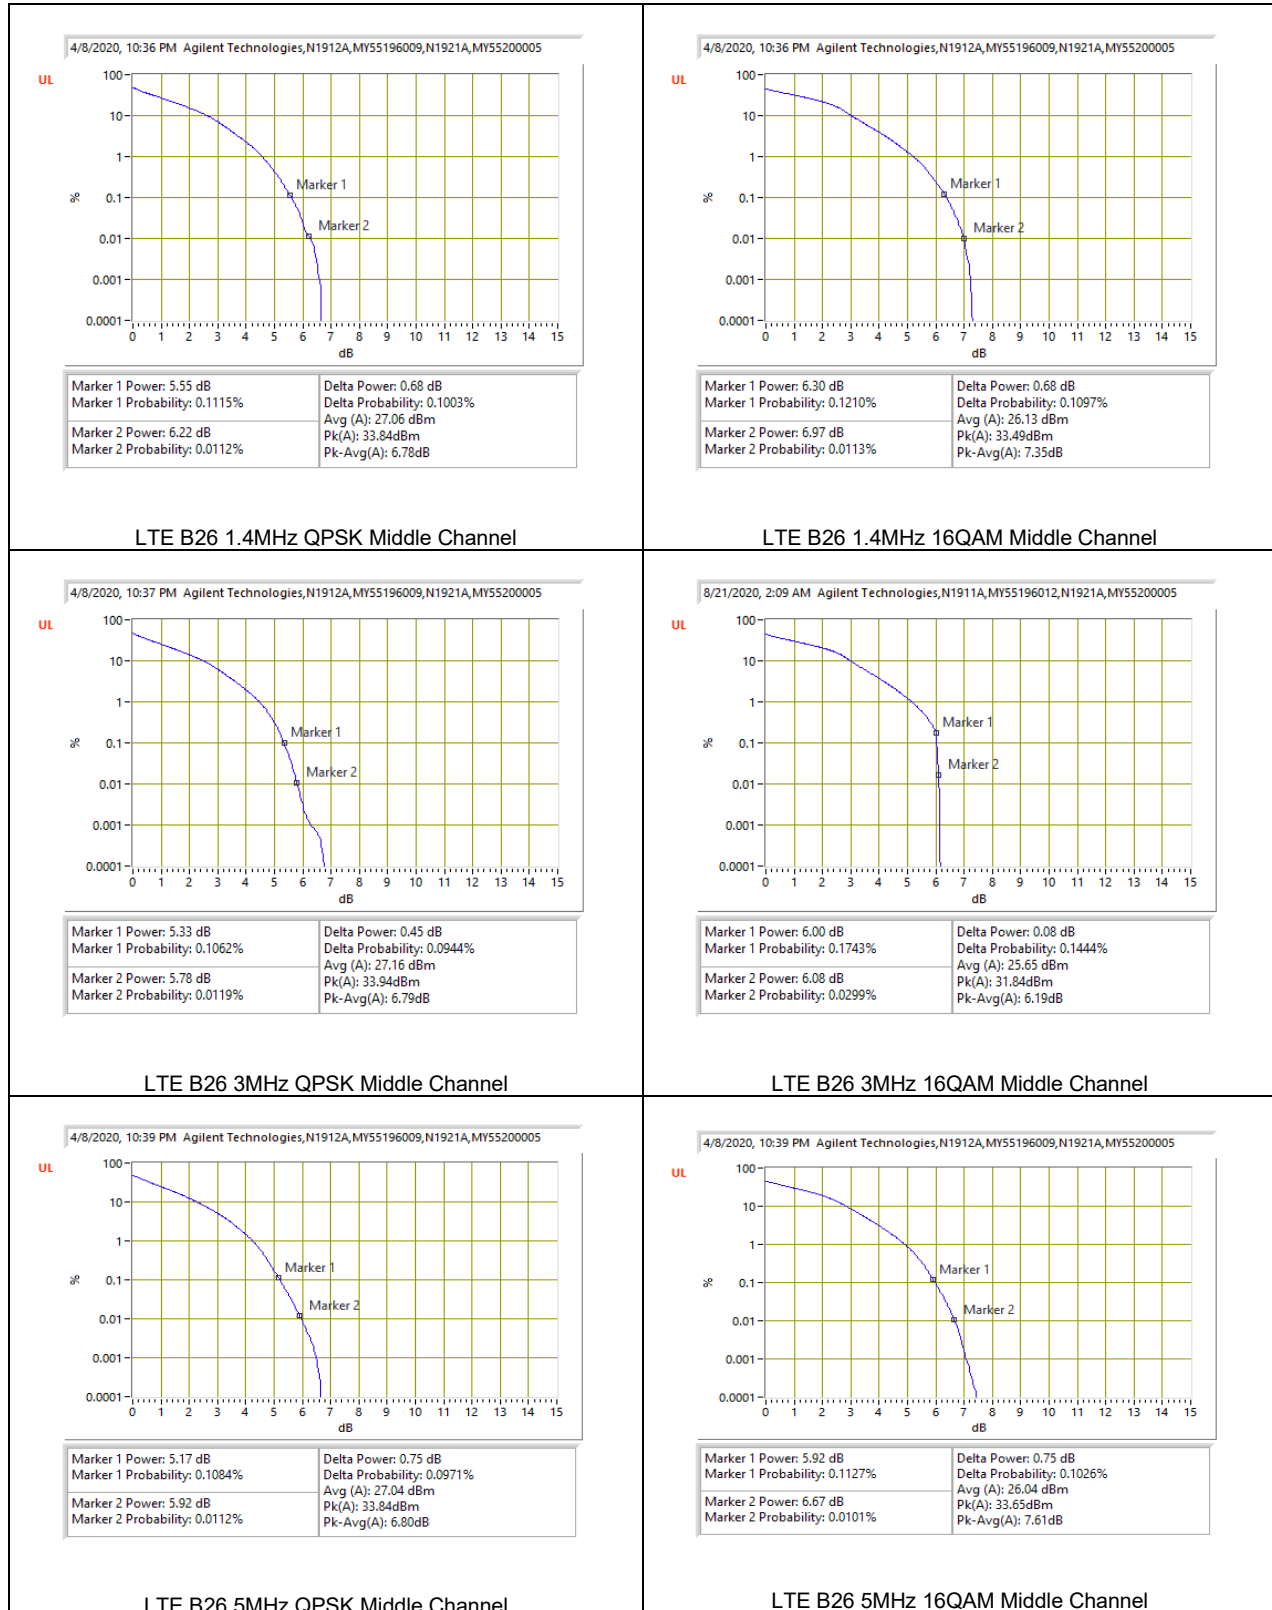

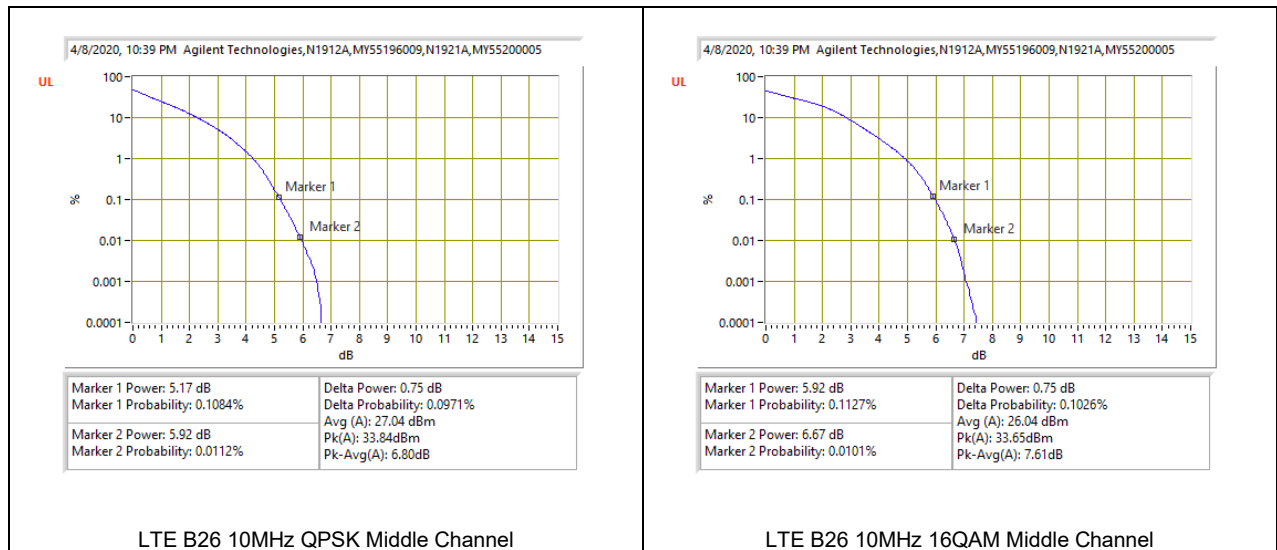

8.5.10. LTE BAND 30

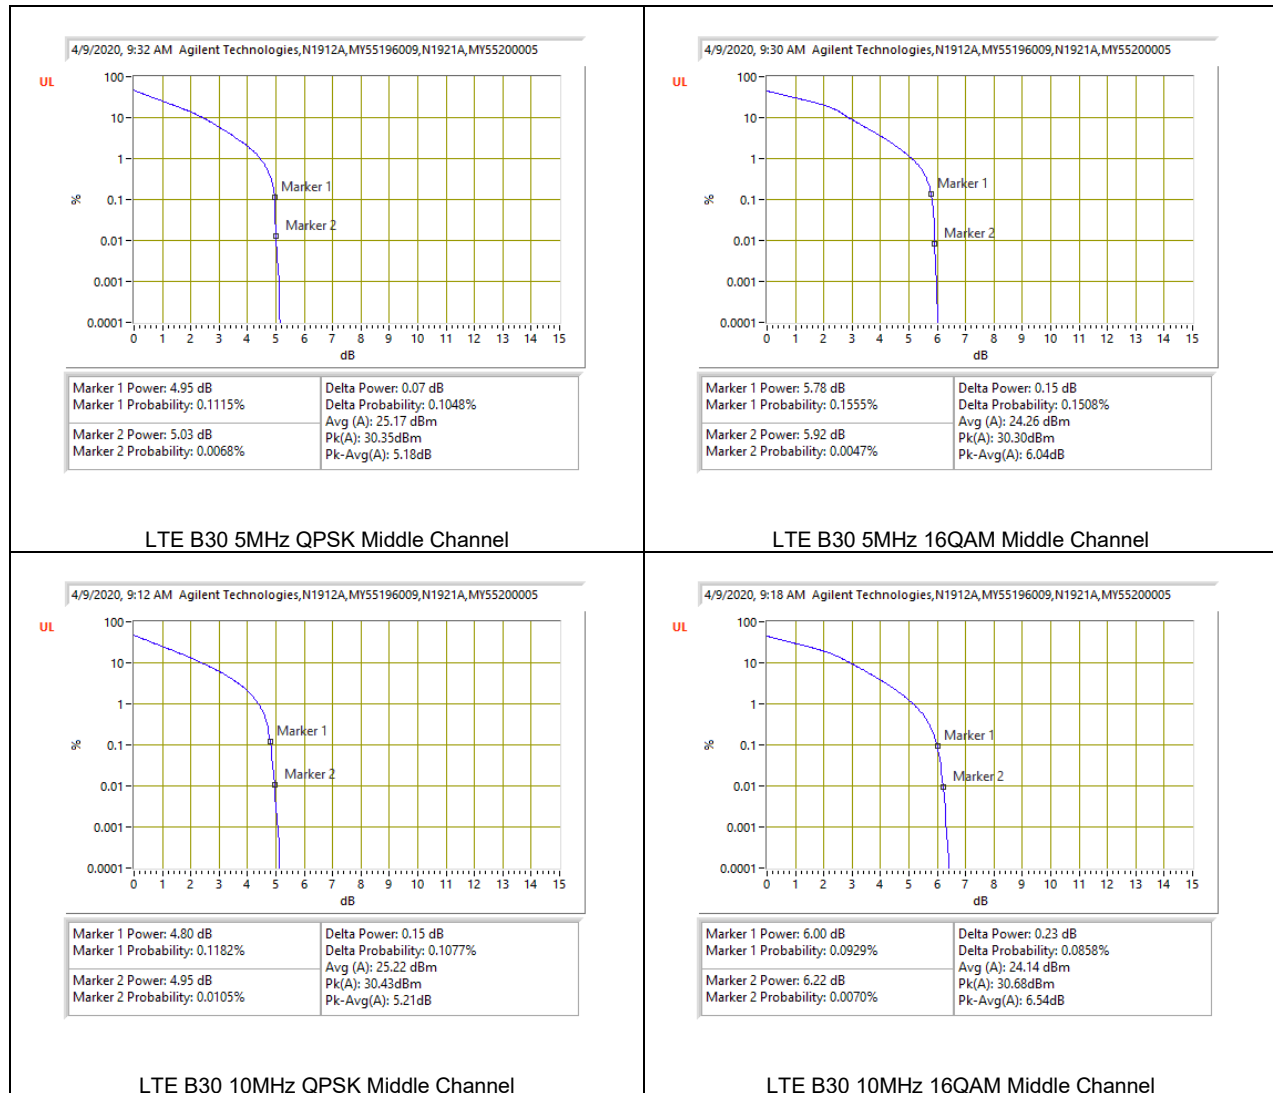

8.5.11. LTE BAND 41 AND 5G NR Band n41

Test Engineer ID: 39004 Test Date: 4/9/2020


Band	Bandwidth (MHz)	Frequency (MHz)	RB Allocation	RB OffSet	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
						Peak	Average	
Band 41	5MHz	2593.0	25	0	QPSK	32.44	26.35	6.09
					16QAM	32.84	26.34	6.50
	10MHz		50	0	QPSK	33.04	26.19	6.85
					16QAM	33.11	26.32	6.79
	15MHz		75	0	QPSK	32.52	26.00	6.52
					16QAM	32.86	26.22	6.64
	20MHz		100	0	QPSK	32.97	26.33	6.64
					16QAM	33.06	26.47	6.59
Band n41	40MHz		100	0	QPSK	32.69	27.83	4.86
					16QAM	33.16	27.32	5.84
	50MHz		128	0	QPSK	32.72	28.05	4.67
					16QAM	33.22	27.64	5.58
	60MHz	162	0	QPSK	32.61	28.13	4.48	
				16QAM	32.92	27.39	5.53	
	80MHz	216	0	QPSK	32.61	28.53	4.08	
				16QAM	32.95	27.74	5.21	
	90MHz	240	0	QPSK	32.41	28.44	3.97	
				16QAM	32.93	27.72	5.21	
	100MHz	270	0	QPSK	32.25	28.4	3.85	
				16QAM	32.72	27.61	5.11	
Duty Cycle Correction Factor (dB) =			6.99					
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor								


8.5.12. LTE BAND 48

Test Engineer ID: 12482 Test Date: 8/2/2020


Band	Bandwidth (MHz)	Frequency (MHz)	RB Allocation	RB OffSet	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
						Peak	Average	
Band 48	5MHz	3625.0	25	0	QPSK	31.16	15.55	8.62
					16QAM	32.38	17.61	7.78
	10MHz		50	0	QPSK	31.45	18.56	5.90
					16QAM	30.57	17.8	5.78
	15MHz		75	0	QPSK	30.86	17.46	6.41
					16QAM	31.96	17.4	7.57
	20MHz		100	0	QPSK	30.65	17.38	6.28
					16QAM	31.24	17.33	6.92
Duty Cycle Correction Factor (dB) =			6.99					
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor								


8.5.13. LTE BAND 66

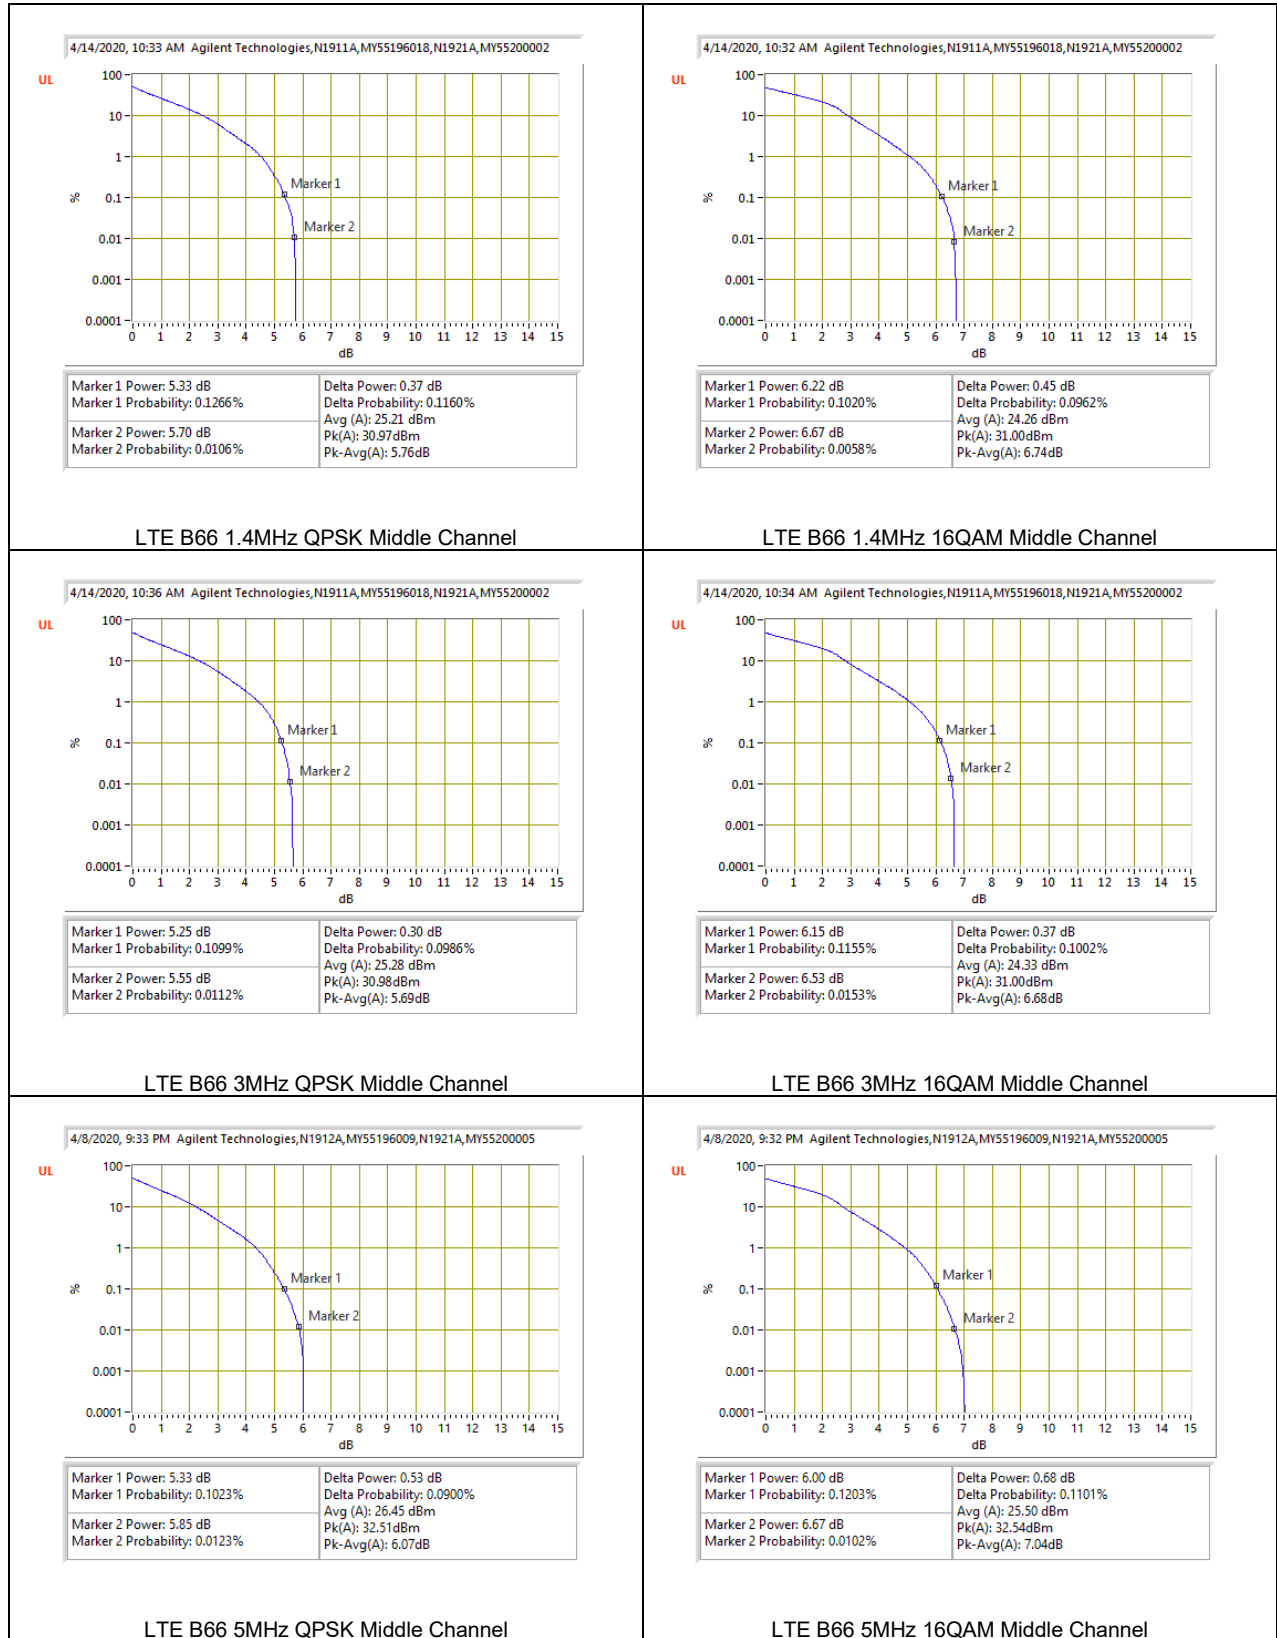

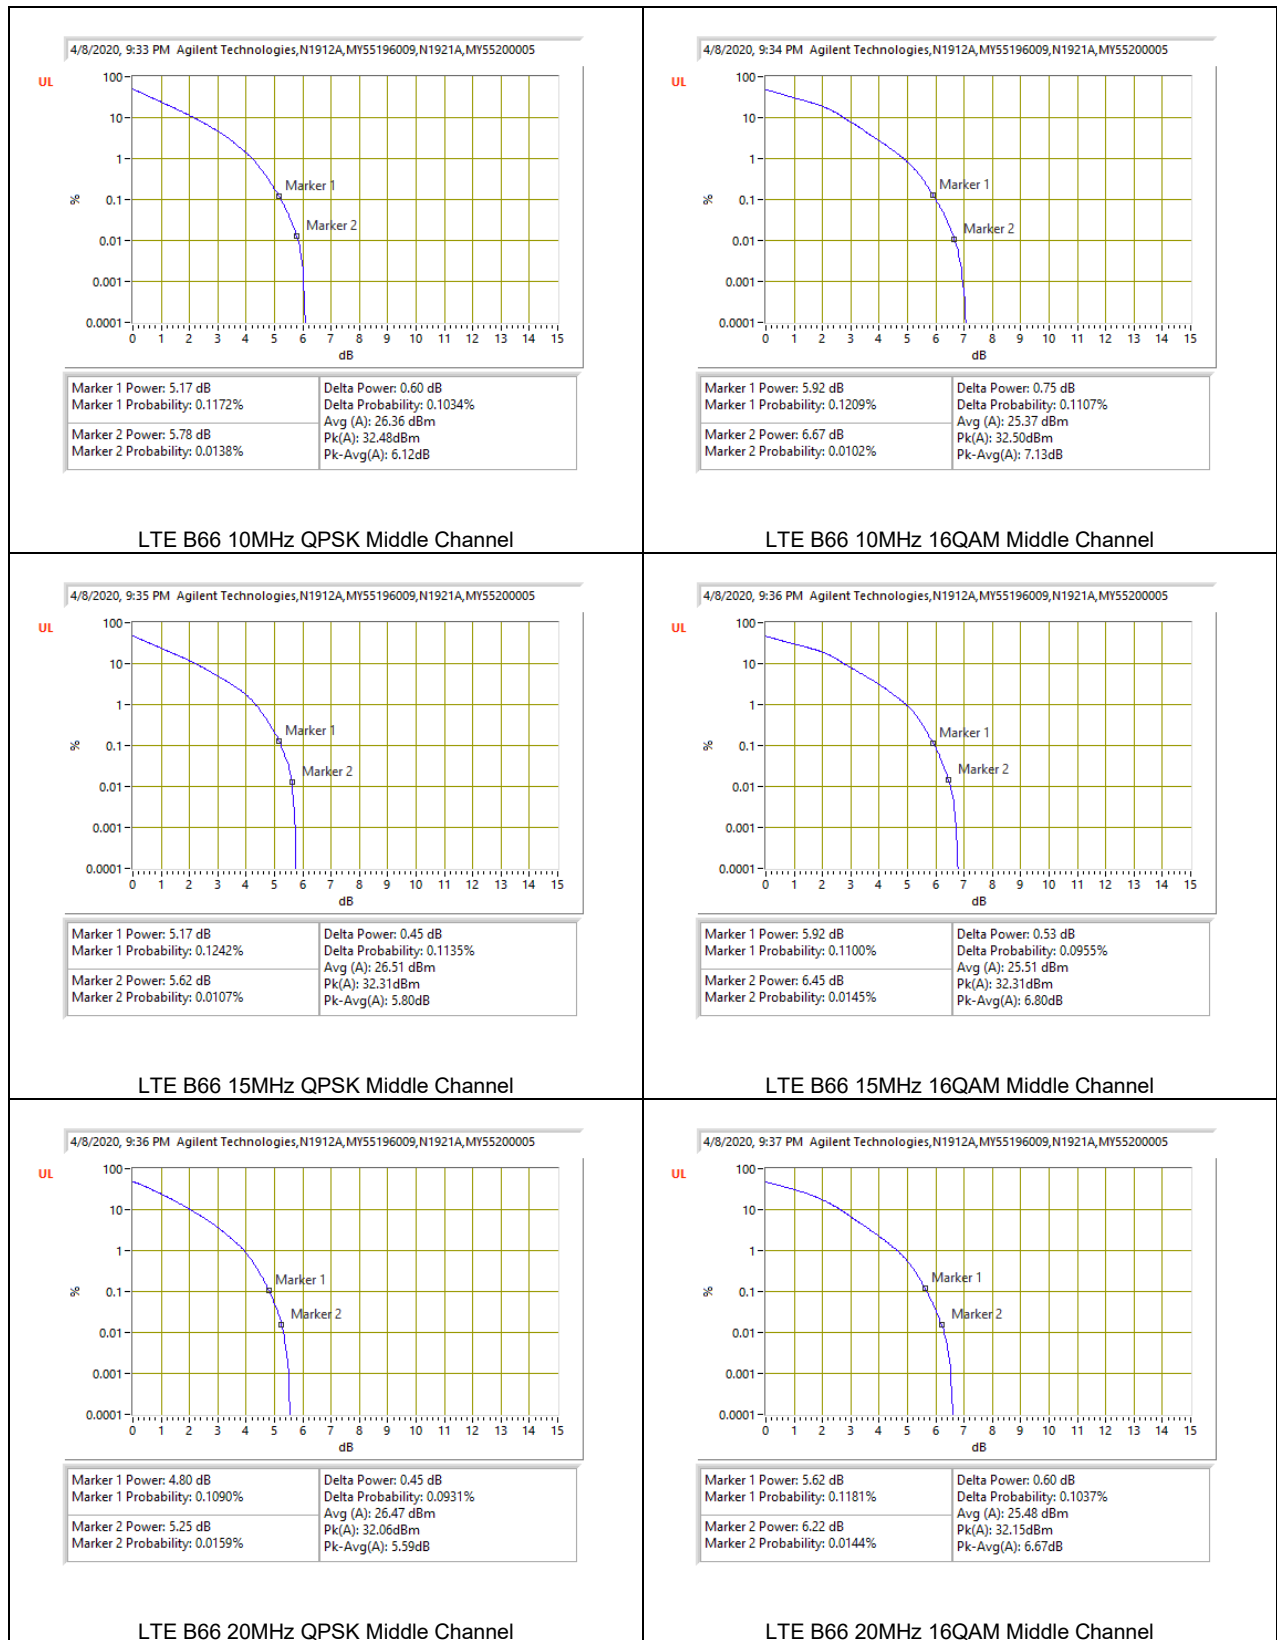

8.5.14. LTE BAND 71

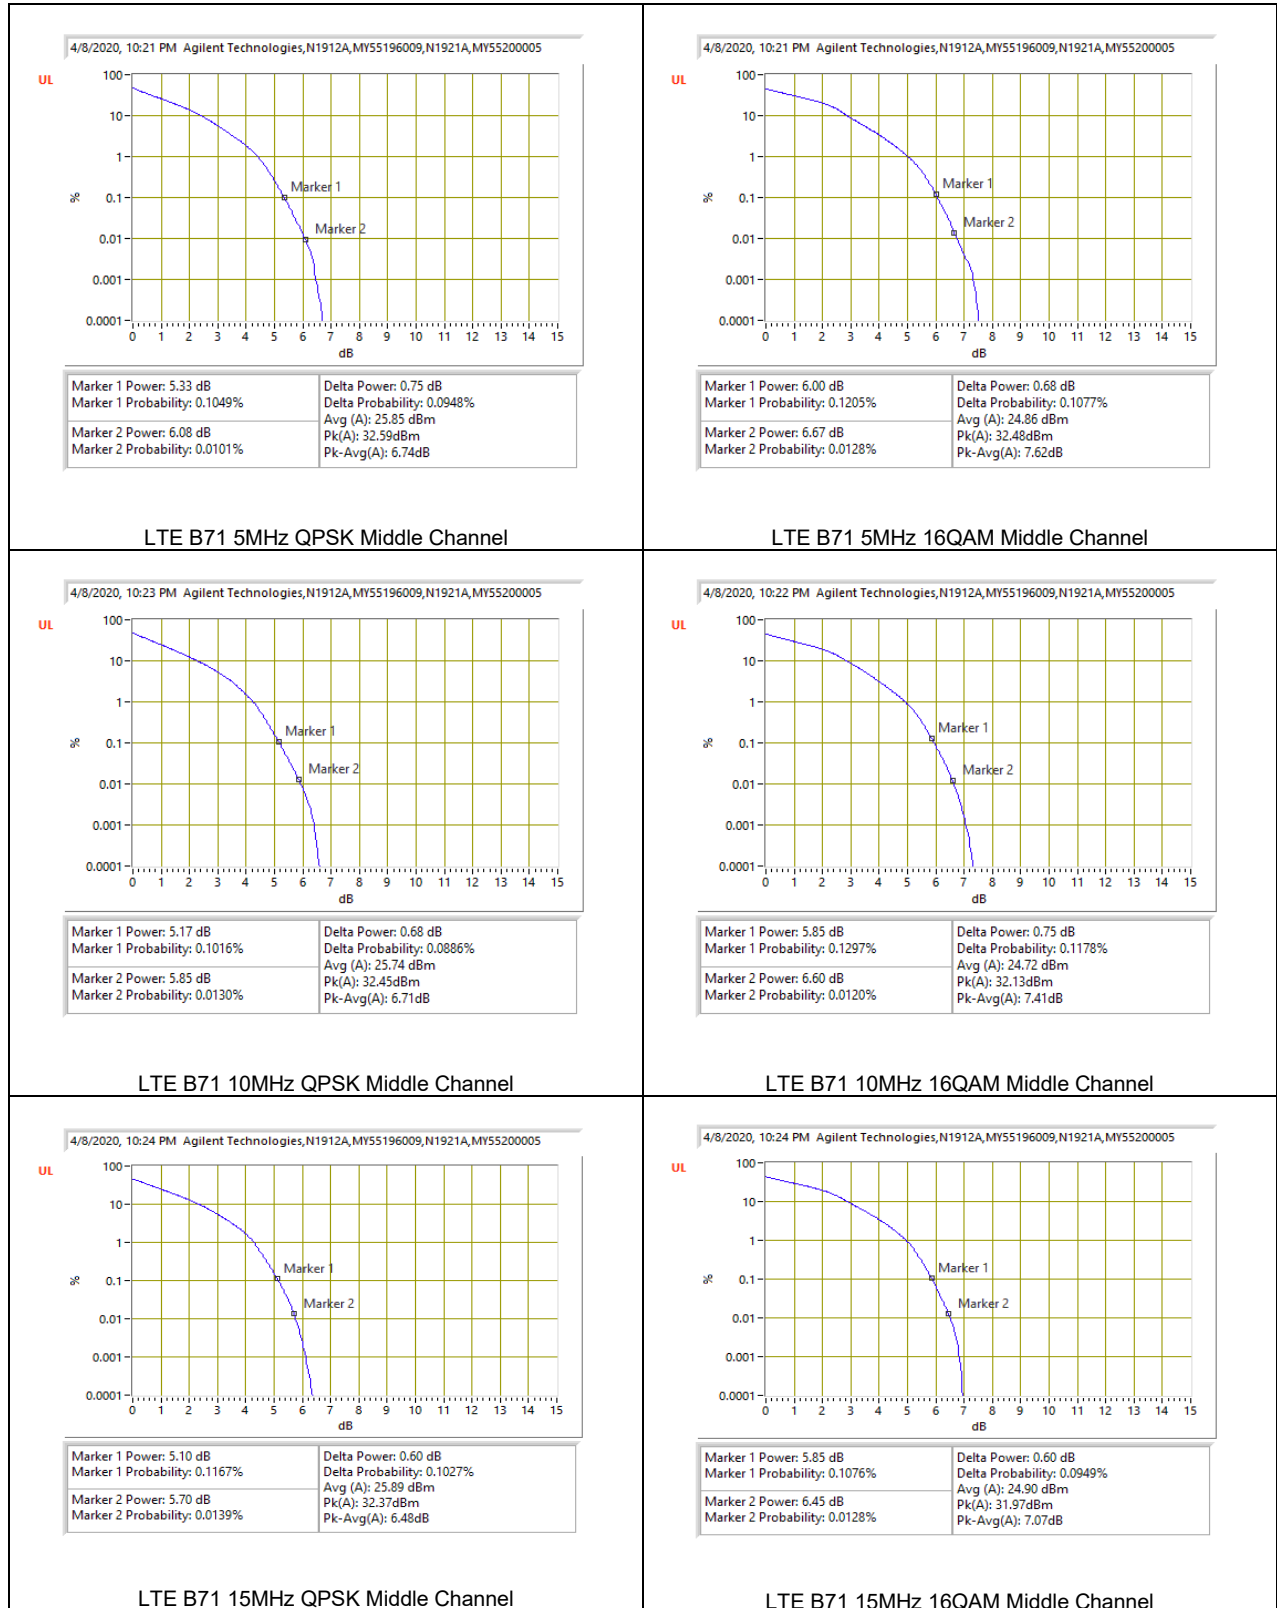

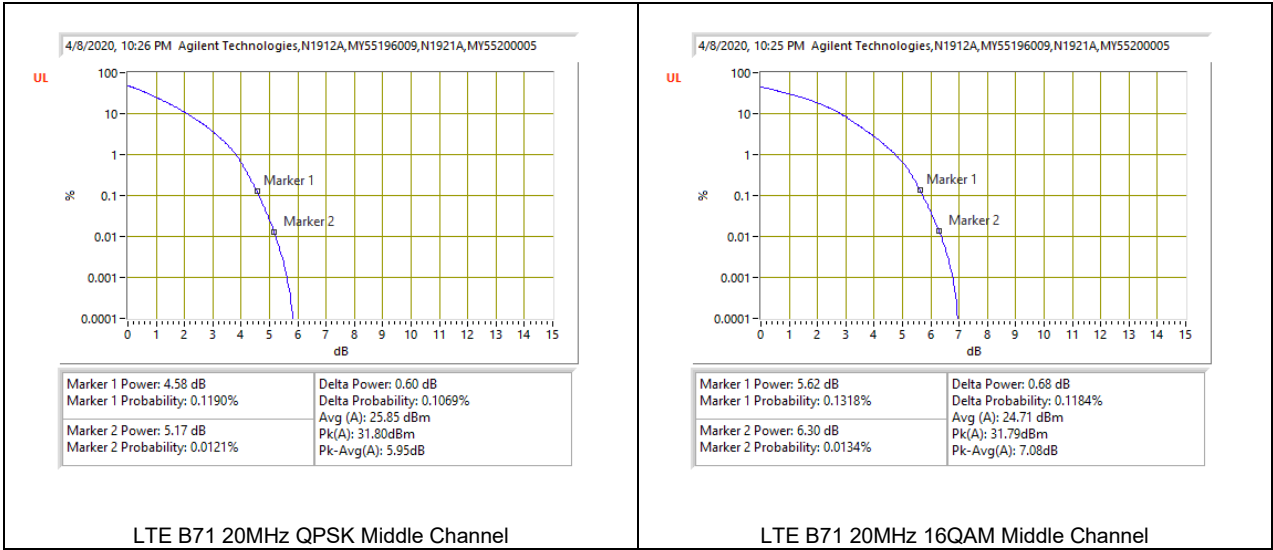

8.5.15. 5G NR Band n77

Test Engineer ID: 19171 Test Date: 8/19/2020

Band	Bandwidth (MHz)	Frequency (MHz)	RB Allocation	RB OffSet	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
						Peak	Average	
n77	20MHz	3840.0	50	0	QPSK	31.03	24.74	6.29
					16QAM	31.36	23.96	7.40
	40MHz		100	0	QPSK	30.96	24.95	6.01
					16QAM	30.24	23.63	6.61
	50MHz		128	0	QPSK	30.25	25.25	5.00
					16QAM	30.25	24.15	6.10
	60MHz		162	0	QPSK	29.72	24.89	4.83
					16QAM	30.12	23.89	6.23
	80MHz		216	0	QPSK	29.31	24.7	4.61
					16QAM	29.57	23.65	5.92
	90MHz		240	0	QPSK	28.98	24.46	4.52
					16QAM	28.94	23.42	5.52
	100MHz		270	0	QPSK	28.51	24.28	4.23
					16QAM	28.69	23.32	5.37
Duty Cycle Correction Factor (dB) =								
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor								

9. RADIATED TEST RESULTS

Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, We measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement method.

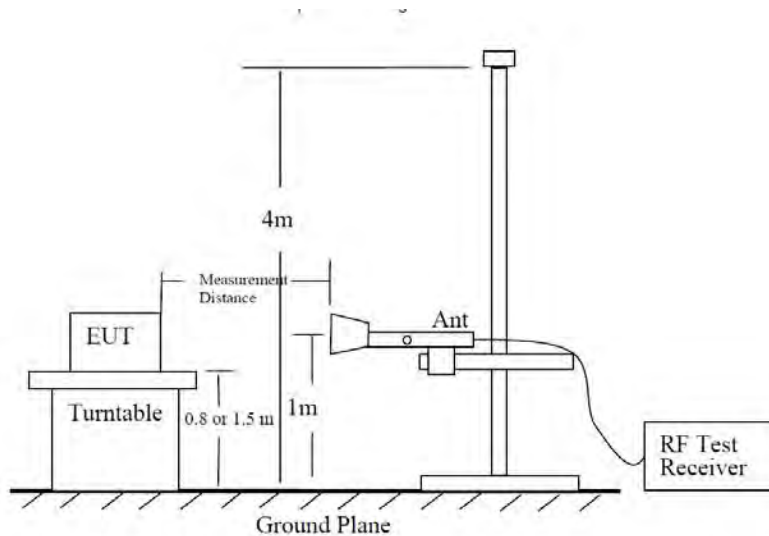


Figure 6 —Test site-up for radiated ERP and/or EIRP measurements

Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.


So, from d)

The measuring distance is usually at 3m, then $20 \cdot \log(3) = 9.5424$


Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

Note that: we do confidence check to our chambers every day to see if any degradation from expected/normal reading reference data. Also we do ambient check to all our chambers every month.

9.1. Example Plot

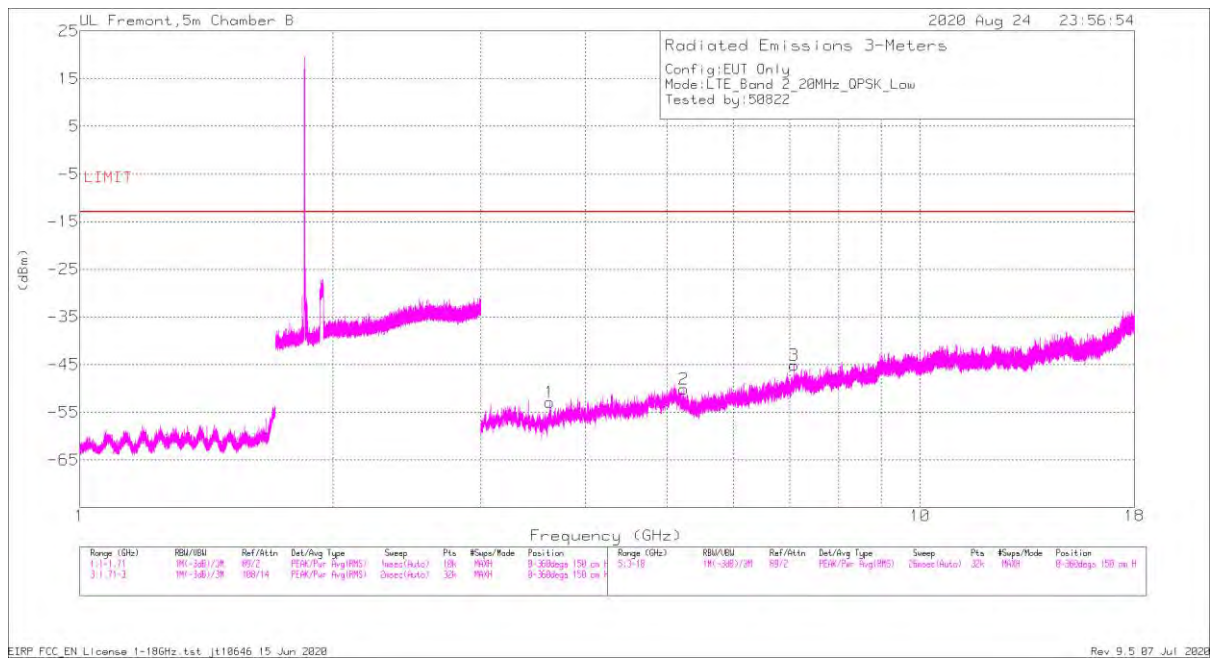

Horizontal Polarity

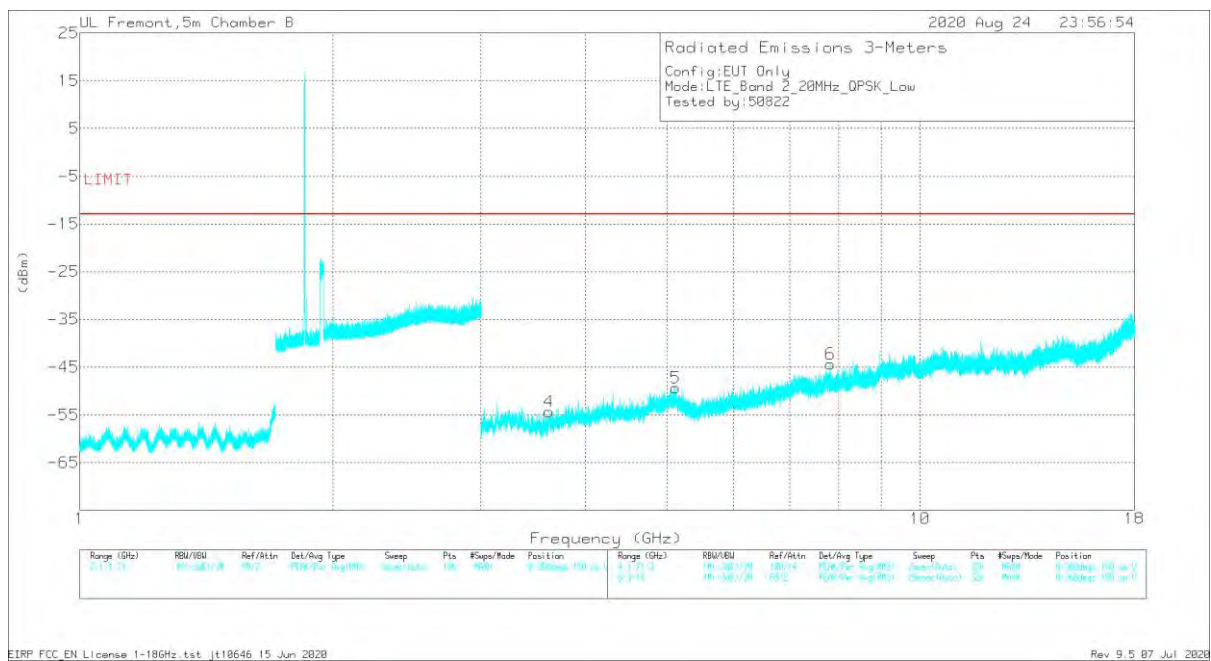

Vertical Polarity

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
4	3.61781	37.92	Pk	30.1	-27.1	-95.2	-54.28	-13	-41.28	V
1	3.62531	39.45	Pk	30.1	-27.2	-95.2	-52.85	-13	-39.85	H
5	5.12109	36.64	Pk	33.9	-24.7	-95.2	-49.36	-13	-36.36	V
2	5.23969	38.02	Pk	33.5	-26.4	-95.2	-50.08	-13	-37.08	H
3	7.08797	36.42	Pk	36.7	-23.1	-95.2	-45.18	-13	-32.18	H
6	7.82625	35.83	Pk	37.3	-22.3	-95.2	-44.37	-13	-31.37	V

Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
3.61468	39.27	Pk	30.1	-27.2	-95.2	-53.03	-13	-40.03	V
3.62443	39.05	Pk	30.1	-27.2	-95.2	-53.25	-13	-40.25	H
5.12547	37.13	Pk	33.8	-24.8	-95.2	-49.07	-13	-36.07	V
5.24135	38.07	Pk	33.5	-26.4	-95.2	-50.03	-13	-37.03	H
7.09205	36.44	Pk	36.6	-23	-95.2	-45.16	-13	-32.16	H
7.83003	34.99	Pk	37.3	-22.4	-95.2	-45.31	-13	-32.31	V

Pk - Peak detector

EIRP FCC_EN License 1-18GHz.tst jt10646 15 Jun 2020

Rev 9.5 07 Jul 2020

9.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT1

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

All tests below 1GHz were done with a Resolution Bandwidth of 100kHz, and a Video Bandwidth of 300kHz.

RESULTS

Both QPSK and 16QAM modes are tested, widest QPSK bandwidths results are reported as worst case

9.2.1. LTE BAND 2

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/23/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE2 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.61468	39.27	Pk	30.1	-27.2	-95.2	-53.03	-13	-40.03	V
3.62443	39.05	Pk	30.1	-27.2	-95.2	-53.25	-13	-40.25	H
5.12547	37.13	Pk	33.8	-24.8	-95.2	-49.07	-13	-36.07	V
5.24135	38.07	Pk	33.5	-26.4	-95.2	-50.03	-13	-37.03	H
7.09205	36.44	Pk	36.6	-23	-95.2	-45.16	-13	-32.16	H
7.83003	34.99	Pk	37.3	-22.4	-95.2	-45.31	-13	-32.31	V
Mid Channel, 1880MHz									
3.72073	41.55	Pk	33.3	-29.9	-95.2	-50.25	-13	-37.25	H
3.72204	41.05	Pk	33.3	-29.9	-95.2	-50.75	-13	-37.75	V
5.64009	39.11	Pk	34.8	-28	-95.2	-49.29	-13	-36.29	V
5.642	39.44	Pk	34.9	-28	-95.2	-48.86	-13	-35.86	H
7.51804	36.45	Pk	35.7	-24.4	-95.2	-47.45	-13	-34.45	V
7.51974	36.58	Pk	35.7	-24.4	-95.2	-47.32	-13	-34.32	H
High Channel, 1900MHz									
3.77978	40.61	Pk	33.6	-30.1	-95.2	-51.09	-13	-38.09	V
3.78032	40.97	Pk	33.6	-30.1	-95.2	-50.73	-13	-37.73	H
5.6979	39.06	Pk	34.8	-28.3	-95.2	-49.64	-13	-36.64	V
5.70072	40.06	Pk	34.9	-28.2	-95.2	-48.44	-13	-35.44	H
7.59882	36.64	Pk	35.7	-24.5	-95.2	-47.36	-13	-34.36	V
7.60112	37.56	Pk	35.8	-24.6	-95.2	-46.44	-13	-33.44	H

9.2.3. LTE BAND 5 AND 5G NR Band n5

LIMITS

FCC: §22.917(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 5 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/24/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE5 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 829MHz									
1.66442	41.81	Pk	28.7	-32.8	-95.2	-57.49	-13	-44.49	V
1.66507	54.65	Pk	28.7	-32.8	-95.2	-44.65	-13	-31.65	H
2.48513	41.64	Pk	32.6	-32	-95.2	-52.96	-13	-39.96	H
2.49518	41.08	Pk	32.6	-31.9	-95.2	-53.42	-13	-40.42	V
3.32077	40.64	Pk	32.8	-30.7	-95.2	-52.46	-13	-39.46	V
3.32088	39.59	Pk	32.8	-30.7	-95.2	-53.51	-13	-40.51	H
Mid Channel, 836.5MHz									
1.66835	41.7	Pk	28.8	-32.8	-95.2	-57.5	-13	-44.5	V
1.66851	56.56	Pk	28.8	-32.8	-95.2	-42.64	-13	-29.64	H
2.50243	40.18	Pk	32.6	-31.9	-95.2	-54.32	-13	-41.32	V
2.50515	40.24	Pk	32.7	-31.8	-95.2	-54.06	-13	-41.06	H
3.33848	40.73	Pk	32.8	-30.8	-95.2	-52.47	-13	-39.47	H
3.34802	40.96	Pk	32.8	-30.7	-95.2	-52.14	-13	-39.14	V
High Channel, 844MHz									
1.68233	41.75	Pk	28.9	-32.8	-95.2	-57.35	-13	-44.35	V
1.68343	52.47	Pk	28.9	-32.8	-95.2	-46.63	-13	-33.63	H
2.52926	41.03	Pk	32.6	-31.8	-95.2	-53.37	-13	-40.37	V
2.53821	41.57	Pk	32.6	-31.7	-95.2	-52.73	-13	-39.73	H
3.37479	39.77	Pk	32.8	-30.7	-95.2	-53.33	-13	-40.33	V
3.3766	39.42	Pk	32.8	-30.7	-95.2	-53.68	-13	-40.68	H

QPSK 5G NR Band n5 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/22/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	5G NR Band n5 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 834MHz									
1.66715	41.32	Pk	28.9	-32.2	-95.2	-56.48	-13	-43.48	V
1.66876	41.33	Pk	28.9	-32.2	-95.2	-56.47	-13	-43.47	H
2.50165	42.81	Pk	33.5	-31.3	-95.2	-49.59	-13	-36.59	H
2.50179	41.34	Pk	33.5	-31.3	-95.2	-51.06	-13	-38.06	V
3.33667	39.73	Pk	33	-30.2	-95.2	-52.07	-13	-39.07	H
3.33696	40.42	Pk	33	-30.2	-95.2	-51.38	-13	-38.38	V
Mid Channel, 836.5MHz									
1.67189	41.63	Pk	29	-32.2	-95.2	-56.07	-13	-43.07	V
1.67479	41.62	Pk	29	-32.2	-95.2	-56.08	-13	-43.08	H
2.50945	42.4	Pk	33.5	-31.4	-95.2	-50	-13	-37	V
2.50955	43.71	Pk	33.5	-31.4	-95.2	-48.69	-13	-35.69	H
3.34557	39.73	Pk	33	-30.1	-95.2	-51.97	-13	-38.97	V
3.34575	40.88	Pk	33	-30.1	-95.2	-50.82	-13	-37.82	H
High Channel, 839MHz									
1.6762	42.23	Pk	29	-32.2	-95.2	-55.47	-13	-42.47	V
1.67833	42.12	Pk	28.9	-32.2	-95.2	-55.68	-13	-42.68	H
2.51673	46.56	Pk	33.5	-31.4	-95.2	-45.74	-13	-32.74	H
2.51754	41.27	Pk	33.5	-31.3	-95.2	-50.93	-13	-37.93	V
3.35616	40.13	Pk	33	-30.1	-95.2	-51.57	-13	-38.57	V
3.35636	40.2	Pk	33	-30.1	-95.2	-51.5	-13	-38.5	H

9.2.4. LTE BAND 7

LIMITS

FCC: §27.53 (m)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/24/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE7 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2510MHz									
5.02753	40.01	Pk	34.3	-28.8	-95.2	-49.69	-25	-24.69	V
5.03029	40.1	Pk	34.3	-28.8	-95.2	-49.6	-25	-24.6	H
7.53056	37.13	Pk	35.8	-24.6	-95.2	-46.87	-25	-21.87	H
7.53469	36.35	Pk	35.8	-24.6	-95.2	-47.65	-25	-22.65	V
10.04494	34.89	Pk	37.1	-22.1	-95.2	-45.31	-25	-20.31	H
10.13111	36.2	Pk	37.2	-22	-95.2	-43.8	-25	-18.8	V
Mid Channel, 2535MHz									
5.06923	39.41	Pk	34.3	-28.6	-95.2	-50.09	-25	-25.09	H
5.08552	39.5	Pk	34.4	-28.6	-95.2	-49.9	-25	-24.9	V
7.60605	37.17	Pk	35.8	-24.6	-95.2	-46.83	-25	-21.83	H
7.66324	36.81	Pk	35.8	-24.3	-95.2	-46.89	-25	-21.89	V
10.11515	36.15	Pk	37.2	-22.1	-95.2	-43.95	-25	-18.95	V
10.12988	35.67	Pk	37.2	-22	-95.2	-44.33	-25	-19.33	H
High Channel, 2560MHz									
5.11024	38.77	Pk	34.4	-28.7	-95.2	-50.73	-25	-25.73	V
5.13682	39.73	Pk	34.6	-28.5	-95.2	-49.37	-25	-24.37	H
7.69142	36.03	Pk	35.8	-23.8	-95.2	-47.17	-25	-22.17	H
7.74522	36.43	Pk	35.9	-24.1	-95.2	-46.97	-25	-21.97	V
10.25096	35.47	Pk	37.4	-21.6	-95.2	-43.93	-25	-18.93	H
10.29732	36.07	Pk	37.3	-21.5	-95.2	-43.33	-25	-18.33	V

9.2.5. LTE BAND 12 AND 5G NR Band n12

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 12 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/24/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE12 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 704MHz									
1.40629	42.03	Pk	28.8	-33.1	-95.2	-57.47	-13	-44.47	H
1.40973	42.41	Pk	28.7	-33.1	-95.2	-57.19	-13	-44.19	V
2.11334	41.27	Pk	31.7	-32.2	-95.2	-54.43	-13	-41.43	V
2.11368	40.18	Pk	31.7	-32.2	-95.2	-55.52	-13	-42.52	H
2.81703	40.69	Pk	32.5	-31.3	-95.2	-53.31	-13	-40.31	H
2.81713	39.88	Pk	32.5	-31.3	-95.2	-54.12	-13	-41.12	V
Mid Channel, 707.5MHz									
1.41358	41.36	Pk	28.7	-33.1	-95.2	-58.24	-13	-45.24	H
1.41526	43.29	Pk	28.6	-33.1	-95.2	-56.41	-13	-43.41	V
2.12337	40.35	Pk	31.7	-32.2	-95.2	-55.35	-13	-42.35	H
2.12455	42.13	Pk	31.7	-32.2	-95.2	-53.57	-13	-40.57	V
2.82943	41.64	Pk	32.4	-31.2	-95.2	-52.36	-13	-39.36	H
2.8315	40.56	Pk	32.4	-31.2	-95.2	-53.44	-13	-40.44	V
High Channel, 711MHz									
1.42084	44.36	Pk	28.6	-33	-95.2	-55.24	-13	-42.24	V
1.42875	43.76	Pk	28.5	-33	-95.2	-55.94	-13	-42.94	H
2.13463	41.3	Pk	31.7	-32.1	-95.2	-54.3	-13	-41.3	V
2.14262	40.49	Pk	31.7	-32	-95.2	-55.01	-13	-42.01	H
2.83383	41.29	Pk	32.4	-31.2	-95.2	-52.71	-13	-39.71	V
2.8349	40.01	Pk	32.4	-31.2	-95.2	-53.99	-13	-40.99	H

QPSK 5G NR Band n12 (15.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/20/2020
Test Engineer:	30606
Configuration:	EUT only
Mode	5G NR Band n12 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1- 18GHz	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 706.5MHz										
1.42067	41.8	Pk	29	-32.6	.9	-95.2	-56.1	-13	-43.1	H
1.43191	41.49	Pk	29	-32.5	.9	-95.2	-56.31	-13	-43.31	V
2.09945	40.76	Pk	31.9	-31.8	.5	-95.2	-53.84	-13	-40.84	H
2.10932	40.7	Pk	31.7	-31.9	.5	-95.2	-54.2	-13	-41.2	V
2.818	40.96	Pk	32.6	-30.7	.6	-95.2	-51.74	-13	-38.74	H
2.82605	40.45	Pk	32.6	-30.6	.7	-95.2	-52.05	-13	-39.05	V
Mid Channel, 707.5MHz										
1.4085	41.65	Pk	29.1	-32.7	.9	-95.2	-56.25	-13	-43.25	H
1.41462	42.67	Pk	29.1	-32.7	.9	-95.2	-55.23	-13	-42.23	V
2.12027	41.52	Pk	31.6	-31.7	.5	-95.2	-53.28	-13	-40.28	H
2.1289	40.45	Pk	31.5	-31.5	.5	-95.2	-54.25	-13	-41.25	V
2.83486	40.1	Pk	32.5	-30.6	.7	-95.2	-52.5	-13	-39.5	H
1.4085	41.65	Pk	29.1	-32.7	.9	-95.2	-56.25	-13	-43.25	V
High Channel, 708.5MHz										
1.4148	42.03	Pk	29.1	-32.7	.9	-95.2	-55.87	-13	-42.87	H
1.41816	42.03	Pk	29.1	-32.6	.9	-95.2	-55.77	-13	-42.77	V
2.11478	41.75	Pk	31.7	-31.8	.5	-95.2	-53.05	-13	-40.05	H
2.11646	41.42	Pk	31.7	-31.8	.5	-95.2	-53.38	-13	-40.38	V
2.83381	40.36	Pk	32.5	-30.6	.7	-95.2	-52.24	-13	-39.24	H
2.83524	39.95	Pk	32.5	-30.6	.7	-95.2	-52.65	-13	-39.65	V

9.2.1. LTE BAND 13

LIMITS

FCC: §27.53

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

QPSK LTE BAND 13 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/24/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 13 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 782MHz									
1.56219	41.94	Pk	28	-33	-95.2	-58.26	-40	-18.26	V
1.56395	44.54	Pk	28	-33	-95.2	-55.66	-40	-15.66	H
2.34059	39.83	Pk	31.8	-31.9	-95.2	-55.47	-13	-42.47	H
2.34371	41.18	Pk	31.9	-31.9	-95.2	-54.02	-13	-41.02	V
3.11919	40.26	Pk	33.1	-31	-95.2	-52.84	-13	-39.84	H
3.1275	39.38	Pk	33.1	-31	-95.2	-53.72	-13	-40.72	V

* Emissions in the GPS band were wideband emissions therefore the -40dBm/MHz limit was used.

9.2.2. LTE BAND 14

LIMITS

FCC: §90.543 Emission Limitations. (Band 14)

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation

QPSK LTE BAND 14 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE14 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 793MHz									
1.5857	41.47	Pk	28.1	-32.9	-95.2	-58.53	-40	-18.53	V
1.58734	41.89	Pk	28.1	-32.9	-95.2	-58.11	-40	-18.11	H
2.37501	42.18	Pk	32.2	-31.8	-95.2	-52.62	-13	-39.62	V
2.37933	40.93	Pk	32.2	-31.8	-95.2	-53.87	-13	-40.87	H
3.17054	40.43	Pk	32.9	-30.9	-95.2	-52.77	-13	-39.77	H
3.17059	40.7	Pk	32.9	-30.9	-95.2	-52.5	-13	-39.5	V

*** Emissions in the GPS band were wideband emissions therefore the -40dBm/MHz limit was used.**

9.2.3. LTE BAND 17

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 17 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 17 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 710MHz									
1.42048	41.79	Pk	28.6	-33	-95.2	-57.81	-13	-44.81	H
1.4217	42.27	Pk	28.6	-33	-95.2	-57.33	-13	-44.33	V
2.13461	42.12	Pk	31.7	-32.1	-95.2	-53.48	-13	-40.48	V
2.13582	41.94	Pk	31.7	-32.1	-95.2	-53.66	-13	-40.66	H
2.83499	40.59	Pk	32.4	-31.2	-95.2	-53.41	-13	-40.41	H
2.84043	40.98	Pk	32.4	-31.1	-95.2	-52.92	-13	-39.92	V

9.2.4. LTE BAND 25

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 25 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1860MHz									
3.71195	40.43	Pk	33.3	-29.9	-95.2	-51.37	-13	-38.37	V
3.71478	40.99	Pk	33.3	-29.9	-95.2	-50.81	-13	-37.81	H
5.55452	38.97	Pk	34.8	-27.8	-95.2	-49.23	-13	-36.23	V
5.5915	39.28	Pk	34.9	-28	-95.2	-49.02	-13	-36.02	H
7.428	37.22	Pk	35.7	-24.9	-95.2	-47.18	-13	-34.18	V
7.45362	36.27	Pk	35.7	-24.6	-95.2	-47.83	-13	-34.83	H
Mid Channel, 1882.5MHz									
3.76124	40.38	Pk	33.6	-30.1	-95.2	-51.32	-13	-38.32	V
3.77551	40.74	Pk	33.6	-30.1	-95.2	-50.96	-13	-37.96	H
5.65985	38.77	Pk	34.9	-28	-95.2	-49.53	-13	-36.53	V
5.66745	38.25	Pk	34.8	-27.9	-95.2	-50.05	-13	-37.05	H
7.54663	36.2	Pk	35.8	-24.7	-95.2	-47.9	-13	-34.9	H
7.57733	36.7	Pk	35.7	-24.4	-95.2	-47.2	-13	-34.2	V
High Channel, 1905MHz									
3.8216	41.14	Pk	33.7	-30	-95.2	-50.36	-13	-37.36	V
3.82193	41.3	Pk	33.7	-30	-95.2	-50.2	-13	-37.2	H
5.73836	37.92	Pk	34.9	-28.1	-95.2	-50.48	-13	-37.48	H
5.76171	38.56	Pk	35	-28.2	-95.2	-49.84	-13	-36.84	V
7.62675	36.41	Pk	35.8	-24.2	-95.2	-47.19	-13	-34.19	H
7.64347	36.32	Pk	35.8	-24.1	-95.2	-47.18	-13	-34.18	V

9.2.5. LTE BAND 26 (PART 90S)

LIMITS

FCC: §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 26 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 26 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 819MHz									
1.63948	43.07	Pk	28.6	-32.8	-95.2	-56.33	-13	-43.33	H
1.63996	42.91	Pk	28.6	-32.8	-95.2	-56.49	-13	-43.49	V
2.4527	41.69	Pk	32.5	-31.8	-95.2	-52.81	-13	-39.81	H
2.45778	41.11	Pk	32.5	-31.9	-95.2	-53.49	-13	-40.49	V
3.27457	40.29	Pk	32.9	-30.7	-95.2	-52.71	-13	-39.71	H
3.27529	40.37	Pk	32.9	-30.8	-95.2	-52.73	-13	-39.73	V

9.2.6. LTE BAND 30

LIMITS

FCC: §27.53 (a)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE30 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 2310MHz									
4.63954	36.99	Pk	33.9	-27.7	-95.2	-52.01	-40	-12.01	H
6.92984	34.59	Pk	35.6	-24.7	-95.2	-49.71	-40	-9.71	H
9.24662	33.42	Pk	36.3	-21.7	-95.2	-47.18	-40	-7.18	H
4.63433	38.01	Pk	33.9	-27.7	-95.2	-50.99	-40	-10.99	V
6.92065	35.69	Pk	35.5	-24.8	-95.2	-48.81	-40	-8.81	V
9.25982	33.21	Pk	36.4	-21.7	-95.2	-47.29	-40	-7.29	V

9.2.7. LTE BAND 41 and 5G NR Band n41

LIMITS

FCC: §27.53 (m)

At least 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/23/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 41 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2506MHz									
4.91664	40.08	Pk	34.2	-29.3	-95.2	-50.22	-25	-25.22	H
4.94594	39.17	Pk	34.2	-29.2	-95.2	-51.03	-25	-26.03	V
7.53158	36.07	Pk	35.8	-24.6	-95.2	-47.93	-25	-22.93	H
7.5671	36.67	Pk	35.8	-24.5	-95.2	-47.23	-25	-22.23	V
10.0046	35.13	Pk	37	-21.8	-95.2	-44.87	-25	-19.87	H
10.01808	35.4	Pk	37	-21.9	-95.2	-44.7	-25	-19.7	V
Mid Channel, 2593MHz									
4.79886	40.47	Pk	34.3	-29.2	-95.2	-49.63	-25	-24.63	V
4.80355	40.39	Pk	34.3	-29.2	-95.2	-49.71	-25	-24.71	H
7.15859	36.33	Pk	36.2	-24.9	-95.2	-47.57	-25	-22.57	V
7.16623	36.82	Pk	36	-24.7	-95.2	-47.08	-25	-22.08	H
10.30264	34.83	Pk	37.4	-21.6	-95.2	-44.57	-25	-19.57	H
10.31578	35.25	Pk	37.4	-21.7	-95.2	-44.25	-25	-19.25	V
High Channel, 2680MHz									
5.37313	39	Pk	34.9	-28.7	-95.2	-50	-25	-25	H
5.39029	38.58	Pk	34.9	-28.8	-95.2	-50.52	-25	-25.52	V
8.01666	36.77	Pk	35.8	-24.1	-95.2	-46.73	-25	-21.73	V
8.06625	36.71	Pk	35.8	-24	-95.2	-46.69	-25	-21.69	H
10.70939	35.26	Pk	37.9	-21.3	-95.2	-43.34	-25	-18.34	V
10.72021	35.03	Pk	37.9	-21.4	-95.2	-43.67	-25	-18.67	H

QPSK 5G NR Band n41 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	07/23/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n41 QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2546MHz									
5.17145	39.25	Pk	34.6	-27.8	-95.2	-48.45	-25	-23.45	V
5.17448	39.77	Pk	34.6	-27.8	-95.2	-47.93	-25	-22.93	H
7.76937	35.8	Pk	35.9	-23.5	-95.2	-46.7	-25	-21.7	V
7.79543	35.59	Pk	36	-23.4	-95.2	-46.61	-25	-21.61	H
10.36382	35.44	Pk	37.7	-20.2	-95.2	-41.46	-25	-16.46	H
10.37375	34.92	Pk	37.7	-20.2	-95.2	-41.98	-25	-16.98	V
Mid Channel, 2593MHz									
5.07884	39.5	Pk	34.4	-27.8	-95.2	-48.4	-25	-23.4	H
5.10783	38.96	Pk	34.5	-27.8	-95.2	-48.74	-25	-23.74	V
7.6202	36.91	Pk	35.9	-23.5	-95.2	-45.49	-25	-20.49	V
7.65557	36.81	Pk	35.8	-23.5	-95.2	-45.79	-25	-20.79	H
10.17815	35.31	Pk	37.5	-20.9	-95.2	-42.69	-25	-17.69	H
10.17907	35.78	Pk	37.5	-20.9	-95.2	-42.22	-25	-17.22	V
High Channel, 2640MHz									
5.28017	39.12	Pk	34.7	-27.9	-95.2	-48.98	-25	-23.98	V
5.28198	39.17	Pk	34.7	-28	-95.2	-49.03	-25	-24.03	H
7.91885	36.29	Pk	36.2	-23.4	-95.2	-45.91	-25	-20.91	V
7.91976	36.41	Pk	36.2	-23.4	-95.2	-45.79	-25	-20.79	H
10.55898	35.42	Pk	37.7	-20.5	-95.2	-41.88	-25	-16.88	H
10.55936	35.41	Pk	37.7	-20.5	-95.2	-41.89	-25	-16.89	V

9.2.8. LTE BAND 66

LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 66 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1720MHz									
3.42585	37.66	Pk	32.7	-29.3	-95.2	-54.14	-13	-41.14	H
5.12649	36.55	Pk	34.4	-27.1	-95.2	-51.35	-13	-38.35	H
6.84248	34.79	Pk	35.6	-25.3	-95.2	-50.11	-13	-37.11	H
3.43295	37.98	Pk	32.7	-29.3	-95.2	-53.82	-13	-40.82	V
5.18397	36.74	Pk	34.4	-27	-95.2	-51.06	-13	-38.06	V
6.88821	34.74	Pk	35.5	-24.9	-95.2	-49.86	-13	-36.86	V
Mid Channel, 1745MHz									
3.49168	37.45	Pk	32.9	-28.9	-95.2	-53.75	-13	-40.75	H
5.24543	36.19	Pk	34.5	-26.9	-95.2	-51.41	-13	-38.41	H
6.98658	35.13	Pk	35.6	-24.8	-95.2	-49.27	-13	-36.27	H
3.46012	38.28	Pk	32.8	-29.2	-95.2	-53.32	-13	-40.32	V
5.23206	36.12	Pk	34.5	-26.7	-95.2	-51.28	-13	-38.28	V
6.9806	34.7	Pk	35.6	-24.9	-95.2	-49.8	-13	-36.8	V
High Channel, 1770MHz									
3.57048	-69.06	Pk	33	-28.5	11.2	-53.36	-13	-40.36	H
5.36534	-70.84	Pk	34.6	-26.8	12.2	-50.84	-13	-37.84	H
7.1404	-72.56	Pk	35.7	-24.5	11.7	-49.66	-13	-36.66	H
3.57762	-69.18	Pk	33.1	-28.5	11.5	-53.08	-13	-40.08	V
5.34559	-69.93	Pk	34.6	-26.7	12	-50.03	-13	-37.03	V
7.19184	-72.29	Pk	35.6	-24.7	11.6	-49.79	-13	-36.79	V

9.2.9. LTE BAND 71

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 71 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 71 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 673.0MHz									
1.34537	41.26	Pk	29.3	-33.2	-95.2	-57.84	-13	-44.84	H
1.35413	41.42	Pk	29.6	-33.1	-95.2	-57.28	-13	-44.28	V
2.02101	43.35	Pk	31.7	-32.4	-95.2	-52.55	-13	-39.55	V
2.0232	42.93	Pk	31.7	-32.3	-95.2	-52.87	-13	-39.87	H
2.69067	41.41	Pk	32.4	-31.6	-95.2	-52.99	-13	-39.99	H
2.69553	41.17	Pk	32.4	-31.6	-95.2	-53.23	-13	-40.23	V
Mid Channel, 680.5MHz									
1.3727	42.71	Pk	29.4	-33.2	-95.2	-56.29	-13	-43.29	V
1.38281	42.14	Pk	29.3	-33.2	-95.2	-56.96	-13	-43.96	H
2.06153	40.94	Pk	31.6	-32.4	-95.2	-55.06	-13	-42.06	V
2.06998	41.1	Pk	31.7	-32.4	-95.2	-54.8	-13	-41.8	H
2.74571	40.56	Pk	32.4	-31.4	-95.2	-53.64	-13	-40.64	H
2.75395	40.36	Pk	32.5	-31.4	-95.2	-53.74	-13	-40.74	V
High Channel, 688.0MHz									
1.37054	42.42	Pk	29.5	-33.1	-95.2	-56.38	-13	-43.38	V
1.37263	42.15	Pk	29.4	-33.2	-95.2	-56.85	-13	-43.85	H
2.06787	41.83	Pk	31.7	-32.4	-95.2	-54.07	-13	-41.07	V
2.06879	41.41	Pk	31.7	-32.4	-95.2	-54.49	-13	-41.49	H
2.74603	40.05	Pk	32.4	-31.4	-95.2	-54.15	-13	-41.15	V
2.74949	40.32	Pk	32.4	-31.4	-95.2	-53.88	-13	-40.88	H

FIELD STRENGTH OF SPURIOUS RADIATION, ANT2

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

RESULTS

Both QPSK and 16QAM modes are tested, widest QPSK bandwidths results are reported as worst case.

9.2.10. LTE BAND 2

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE2 QPSK 20MHz
Chamber #:	Chamber i

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.71617	37.53	Pk	33	-28.5	-95.2	-53.17	-13	-40.17	H
5.58556	36.47	Pk	35.2	-26.7	-95.2	-50.23	-13	-37.23	H
7.44266	34.5	Pk	35.6	-24.3	-95.2	-49.4	-13	-36.4	H
3.70899	38.18	Pk	33	-28.5	-95.2	-52.52	-13	-39.52	V
5.60255	36.56	Pk	35.2	-26.8	-95.2	-50.24	-13	-37.24	V
7.43765	34.76	Pk	35.6	-24.3	-95.2	-49.14	-13	-36.14	V
Mid Channel, 1880MHz									
3.75315	38.36	Pk	32.9	-28.4	-95.2	-52.34	-13	-39.34	H
5.65759	36.63	Pk	35.1	-26.8	-95.2	-50.27	-13	-37.27	H
7.52782	35.14	Pk	35.6	-23.9	-95.2	-48.36	-13	-35.36	H
3.75832	37.44	Pk	32.9	-28.4	-95.2	-53.26	-13	-40.26	V
5.56194	36.36	Pk	35.1	-26.7	-95.2	-50.44	-13	-37.44	V
7.55901	33.87	Pk	35.6	-23.8	-95.2	-49.53	-13	-36.53	V
High Channel, 1900MHz									
3.84824	37.48	Pk	33	-28.4	-95.2	-53.12	-13	-40.12	H
5.69362	36.3	Pk	34.9	-26.5	-95.2	-50.5	-13	-37.5	H
7.65136	34.73	Pk	35.6	-24.1	-95.2	-48.97	-13	-35.97	H
3.85188	38.02	Pk	33	-28.3	-95.2	-52.48	-13	-39.48	V
5.72022	36.71	Pk	35	-26.7	-95.2	-50.19	-13	-37.19	V
7.68796	34.51	Pk	35.6	-23.8	-95.2	-48.89	-13	-35.89	V

9.2.12. LTE BAND 5 AND 5G NR Band n5

LIMITS

FCC: §22.917(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 5 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE5 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 829MHz									
1.65982	38.97	Pk	28.7	-31.6	-95.2	-59.13	-13	-46.13	H
2.48359	39.16	Pk	32.4	-30.5	-95.2	-54.14	-13	-41.14	H
3.31175	37.18	Pk	32.7	-29.3	-95.2	-54.62	-13	-41.62	H
1.65941	39.65	Pk	28.7	-31.6	-95.2	-58.45	-13	-45.45	V
2.48289	38.43	Pk	32.4	-30.5	-95.2	-54.87	-13	-41.87	V
3.31159	38.47	Pk	32.7	-29.3	-95.2	-53.33	-13	-40.33	V
Mid Channel, 836.5MHz									
1.6769	39.39	Pk	28.9	-31.6	-95.2	-58.51	-13	-45.51	H
2.50995	39.26	Pk	32.3	-30.1	-95.2	-53.74	-13	-40.74	H
3.34007	38.28	Pk	32.7	-29.2	-95.2	-53.42	-13	-40.42	H
1.66766	40.95	Pk	28.7	-31.6	-95.2	-57.15	-13	-44.15	V
2.51247	38.68	Pk	32.3	-30.1	-95.2	-54.32	-13	-41.32	V
3.3487	38.53	Pk	32.7	-29.2	-95.2	-53.17	-13	-40.17	V
High Channel, 844MHz									
1.68745	40.3	Pk	29.1	-31.6	-95.2	-57.4	-13	-44.4	H
2.53228	39.62	Pk	32.2	-30.1	-95.2	-53.48	-13	-40.48	H
3.37577	38.53	Pk	32.7	-29.2	-95.2	-53.17	-13	-40.17	H
1.68974	40.75	Pk	29.2	-31.6	-95.2	-56.85	-13	-43.85	V
2.53229	38.26	Pk	32.2	-30.1	-95.2	-54.84	-13	-41.84	V
3.37658	37.95	Pk	32.7	-29.3	-95.2	-53.85	-13	-40.85	V

QPSK 5G NR Band n5 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/18/2020
Test Engineer:	19169
Configuration:	EUT only
Mode	5G NR Band n5 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 834MHz									
1.64434	41.75	Pk	29.1	-32.5	-95.2	-56.15	-13	-43.15	H
1.64479	41.66	Pk	29.1	-32.5	-95.2	-56.24	-13	-43.24	V
2.46737	41.22	Pk	33.3	-31.4	-95.2	-51.58	-13	-38.58	V
2.46931	40.99	Pk	33.3	-31.4	-95.2	-51.81	-13	-38.81	H
3.29077	40.03	Pk	33	-30.1	-95.2	-51.47	-13	-38.47	V
3.29079	40.34	Pk	33	-30.1	-95.2	-51.16	-13	-38.16	H
Mid Channel, 836.5MHz									
1.673	41.78	Pk	29	-32.2	-95.2	-55.92	-13	-42.92	V
1.67494	41.49	Pk	29	-32.2	-95.2	-56.21	-13	-43.21	H
2.50877	40.37	Pk	33.5	-31.4	-95.2	-52.03	-13	-39.03	H
2.50957	40.61	Pk	33.5	-31.4	-95.2	-51.79	-13	-38.79	V
3.34611	40.56	Pk	33	-30.1	-95.2	-51.14	-13	-38.14	H
3.34697	39.9	Pk	33	-30.1	-95.2	-51.8	-13	-38.8	V
High Channel, 839MHz									
1.6763	41.66	Pk	29	-32.2	-95.2	-56.04	-13	-43.04	H
1.67937	41.49	Pk	28.9	-32.2	-95.2	-56.31	-13	-43.31	V
2.51684	40.26	Pk	33.5	-31.4	-95.2	-52.04	-13	-39.04	V
2.51821	40.55	Pk	33.5	-31.3	-95.2	-51.65	-13	-38.65	H
3.35562	39.81	Pk	33	-30.1	-95.2	-51.89	-13	-38.89	H
3.35689	40.09	Pk	33	-30.1	-95.2	-51.61	-13	-38.61	V

9.2.13. LTE BAND 7

LIMITS

FCC: §27.53 (m)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE7 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2510MHz									
5.11202	36.76	Pk	34.3	-26.9	-95.2	-51.04	-25	-26.04	H
7.66114	34.46	Pk	35.7	-23.9	-95.2	-48.94	-25	-23.94	H
10.26015	31.97	Pk	37.3	-20.3	-95.2	-46.23	-25	-21.23	H
5.1364	38.1	Pk	34.5	-27	-95.2	-49.6	-25	-24.6	V
7.7019	34.5	Pk	35.7	-23.8	-95.2	-48.8	-25	-23.8	V
10.33179	33.04	Pk	37.4	-20.2	-95.2	-44.96	-25	-19.96	V
Mid Channel, 2535MHz									
5.08182	36.65	Pk	34.4	-27	-95.2	-51.15	-25	-26.15	H
7.60624	35.38	Pk	35.7	-24.1	-95.2	-48.22	-25	-23.22	H
10.14846	31.89	Pk	37.1	-20.2	-95.2	-46.41	-25	-21.41	H
5.11738	36.29	Pk	34.4	-27.1	-95.2	-51.61	-25	-26.61	V
7.64603	34.36	Pk	35.6	-24.1	-95.2	-49.34	-25	-24.34	V
10.24602	31.99	Pk	37.3	-20.3	-95.2	-46.21	-25	-21.21	V
High Channel, 2560MHz									
5.12861	36.37	Pk	34.4	-27.1	-95.2	-51.53	-25	-26.53	H
7.69192	33.76	Pk	35.7	-23.8	-95.2	-49.54	-25	-24.54	H
10.25154	32.01	Pk	37.4	-20.4	-95.2	-46.19	-25	-21.19	H
5.12461	36.89	Pk	34.4	-27	-95.2	-50.91	-25	-25.91	V
7.6909	34.71	Pk	35.6	-23.8	-95.2	-48.69	-25	-23.69	V
10.26956	32.39	Pk	37.4	-20.5	-95.2	-45.91	-25	-20.91	V

9.2.14. LTE BAND 12 AND 5G NR Band n12

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 12 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/29/2020
Test Engineer:	50820
Configuration:	EUT only
Mode	5G NR Band n12 QPSK 15MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 704MHz									
1.40566	40.62	Pk	28.8	-32.2	-95.2	-57.98	-13	-44.98	H
2.11267	40.7	Pk	31.2	-30.9	-95.2	-54.2	-13	-41.2	H
2.81469	38.91	Pk	32.2	-29.8	-95.2	-53.89	-13	-40.89	H
1.39702	40.62	Pk	28.9	-32.3	-95.2	-57.98	-13	-44.98	V
2.10424	40.22	Pk	31.1	-30.8	-95.2	-54.68	-13	-41.68	V
2.82081	38.77	Pk	32.2	-29.8	-95.2	-54.03	-13	-41.03	V
Mid Channel, 707.5MHz									
1.41728	40.77	Pk	28.7	-32.1	-95.2	-57.83	-13	-44.83	H
2.1233	39.61	Pk	31.1	-31	-95.2	-55.49	-13	-42.49	H
2.85544	39.16	Pk	32.1	-29.8	-95.2	-53.74	-13	-40.74	H
1.40861	40.26	Pk	28.8	-32.2	-95.2	-58.34	-13	-45.34	V
2.10832	40.21	Pk	31.1	-30.9	-95.2	-54.79	-13	-41.79	V
2.82877	39.45	Pk	32.2	-29.9	-95.2	-53.45	-13	-40.45	V
High Channel, 711MHz									
1.41822	40.82	Pk	28.7	-32.1	-95.2	-57.78	-13	-44.78	H
2.13779	39.58	Pk	31.1	-30.8	-95.2	-55.32	-13	-42.32	H
2.83099	39.12	Pk	32.2	-30	-95.2	-53.88	-13	-40.88	H
1.41268	41.07	Pk	28.8	-32.2	-95.2	-57.53	-13	-44.53	V
2.11972	40.33	Pk	31.1	-31	-95.2	-54.77	-13	-41.77	V
2.82339	38.96	Pk	32.2	-29.9	-95.2	-53.94	-13	-40.94	V

QPSK 5G NR Band n12 (15.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/28/2020
Test Engineer:	30606
Configuration:	EUT only
Mode	5G NR Band n12 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 706.5MHz									
1.4082	42.16	Pk	29.1	-32.7	-95.2	-55.74	-13	-42.74	V
1.42017	41.62	Pk	29.1	-32.6	-95.2	-56.18	-13	-43.18	H
2.10735	40.78	Pk	31.7	-31.9	-95.2	-54.12	-13	-41.12	H
2.11386	41.53	Pk	31.7	-31.8	-95.2	-53.27	-13	-40.27	V
2.8188	40.13	Pk	32.6	-30.7	-95.2	-52.57	-13	-39.57	H
2.82818	41.11	Pk	32.5	-30.6	-95.2	-51.49	-13	-38.49	V
Mid Channel, 707.5MHz									
1.41186	41.52	Pk	29.1	-32.7	-95.2	-56.38	-13	-43.38	H
1.41807	41.34	Pk	29.1	-32.6	-95.2	-56.46	-13	-43.46	V
2.12295	45.98	Pk	31.6	-31.7	-95.2	-48.82	-13	-35.82	H
2.12365	42.4	Pk	31.6	-31.7	-95.2	-52.4	-13	-39.4	V
2.83107	40.87	Pk	32.5	-30.6	-95.2	-51.73	-13	-38.73	H
2.83331	40.01	Pk	32.5	-30.6	-95.2	-52.59	-13	-39.59	V
High Channel, 708.5MHz									
1.40809	41.54	Pk	29.1	-32.7	-95.2	-56.36	-13	-43.36	V
1.40985	41.6	Pk	29.1	-32.7	-95.2	-56.3	-13	-43.3	H
2.1096	41.03	Pk	31.7	-31.9	-95.2	-53.87	-13	-40.87	V
2.11382	40.58	Pk	31.7	-31.8	-95.2	-54.22	-13	-41.22	H
2.82644	42.32	Pk	32.6	-30.6	-95.2	-50.18	-13	-37.18	V
2.8388	40.2	Pk	32.5	-30.6	-95.2	-52.4	-13	-39.4	H

9.2.15. LTE BAND 13

LIMITS

FCC: §27.53

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

QPSK LTE BAND 13 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE13 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 782MHz									
1.56389	44.12	Pk	27.9	-31.7	-95.2	-54.88	-40	-14.88	H
2.34834	39.47	Pk	31.7	-30.7	-95.2	-54.73	-13	-41.73	H
3.13217	38.02	Pk	32.7	-29.3	-95.2	-53.78	-13	-40.78	H
1.56377	46.04	Pk	27.9	-31.7	-95.2	-52.96	-40	-12.96	V
2.34402	39.27	Pk	31.7	-30.6	-95.2	-54.83	-13	-41.83	V
3.12358	37.31	Pk	32.7	-29.3	-95.2	-54.49	-13	-41.49	V

9.2.16. LTE BAND 14

LIMITS

FCC: §90.543 Emission Limitations. (Band 14)

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation

QPSK LTE BAND 14 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE14 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 793MHz									
1.59051	39.57	Pk	27.9	-31.8	-95.2	-59.53	-40	-19.53	H
2.37146	27.81	Pk	31.9	-30.7	-95.2	-66.19	-13	-53.19	H
3.1717	37.43	Pk	32.7	-28.9	-95.2	-53.97	-13	-40.97	H
1.58604	42.15	Pk	27.9	-31.8	-95.2	-56.95	-40	-16.95	V
2.37324	38.82	Pk	31.9	-30.5	-95.2	-54.98	-13	-41.98	V
3.16322	37.1	Pk	32.7	-28.9	-95.2	-54.3	-13	-41.3	V

9.2.17. LTE BAND 17

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 17 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE17 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 710MHz									
1.42337	40.13	Pk	28.6	-32.1	-95.2	-58.57	-13	-45.57	H
2.1361	39.64	Pk	31.1	-30.8	-95.2	-55.26	-13	-42.26	H
2.83937	39.05	Pk	32.2	-30	-95.2	-53.95	-13	-40.95	H
1.42117	41	Pk	28.6	-32.1	-95.2	-57.7	-13	-44.7	V
2.12772	38.21	Pk	31.2	-30.9	-95.2	-56.69	-13	-43.69	V
2.83711	38.47	Pk	32.2	-30.1	-95.2	-54.63	-13	-41.63	V

9.2.18. LTE BAND 25

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE25 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1860MHz									
3.72539	38.59	Pk	32.9	-28.5	-95.2	-52.21	-13	-39.21	H
5.58674	37.08	Pk	35.2	-26.7	-95.2	-49.62	-13	-36.62	H
7.44095	34.92	Pk	35.6	-24.3	-95.2	-48.98	-13	-35.98	H
3.70149	38.31	Pk	33	-28.7	-95.2	-52.59	-13	-39.59	V
5.55508	36.4	Pk	35.1	-26.7	-95.2	-50.4	-13	-37.4	V
7.4159	35.26	Pk	35.6	-24.4	-95.2	-48.74	-13	-35.74	V
Mid Channel, 1882.5MHz									
3.76834	37.82	Pk	33	-28.2	-95.2	-52.58	-13	-39.58	H
5.64729	36.46	Pk	35.1	-26.5	-95.2	-50.14	-13	-37.14	H
7.53946	35.14	Pk	35.5	-24	-95.2	-48.56	-13	-35.56	H
3.77554	37.89	Pk	33	-28.3	-95.2	-52.61	-13	-39.61	V
5.67115	36.88	Pk	35	-26.7	-95.2	-50.02	-13	-37.02	V
7.58126	34.99	Pk	35.5	-24.2	-95.2	-48.91	-13	-35.91	V
High Channel, 1905MHz									
3.81522	37.81	Pk	32.9	-28.4	-95.2	-52.89	-13	-39.89	H
5.72448	36.36	Pk	34.9	-26.7	-95.2	-50.64	-13	-37.64	H
7.62499	34.61	Pk	35.7	-24.1	-95.2	-48.99	-13	-35.99	H
3.84399	38	Pk	33	-28.4	-95.2	-52.6	-13	-39.6	V
5.72848	36.35	Pk	34.9	-26.6	-95.2	-50.55	-13	-37.55	V
7.64014	35.03	Pk	35.6	-24.1	-95.2	-48.67	-13	-35.67	V

9.2.19. LTE BAND 26 (PART 90S)

LIMITS

FCC: §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 26 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/27/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 26 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 819MHz									
1.63548	41.61	Pk	28.5	-32.8	-95.2	-57.89	-13	-44.89	V
1.63814	44.05	Pk	28.5	-32.8	-95.2	-55.45	-13	-42.45	H
2.45311	40.96	Pk	32.5	-31.8	-95.2	-53.54	-13	-40.54	V
2.46012	41.48	Pk	32.6	-31.9	-95.2	-53.02	-13	-40.02	H
3.26842	40.54	Pk	33	-30.7	-95.2	-52.36	-13	-39.36	V
3.27361	40.46	Pk	32.9	-30.7	-95.2	-52.54	-13	-39.54	H

9.2.20. LTE BAND 30

LIMITS

FCC: §27.53 (a)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	LTE30 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 2310MHz									
3.51419	39.57	Pk	32.8	-28.7	-95.2	-51.53	-40	-11.53	H
5.24563	36.7	Pk	34.5	-26.9	-95.2	-50.9	-40	-10.9	H
6.98985	35.86	Pk	35.7	-24.8	-95.2	-48.44	-40	-8.44	H
3.49171	37.43	Pk	32.9	-28.9	-95.2	-53.77	-40	-13.77	V
5.23179	37.92	Pk	34.5	-26.7	-95.2	-49.48	-40	-9.48	V
6.96457	36.08	Pk	35.7	-24.8	-95.2	-48.22	-40	-8.22	V

9.2.21. LTE BAND 41 AND 5G NR Band n41

LIMITS

FCC: §27.53 (m)

At least 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 41 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2506MHz									
5.02098	36.8	Pk	34.2	-27.1	-95.2	-51.3	-25	-26.3	H
7.51802	34.45	Pk	35.5	-23.9	-95.2	-49.15	-25	-24.15	H
10.19117	31.34	Pk	37.2	-20.1	-95.2	-46.76	-25	-21.76	H
5.04987	36.26	Pk	34.4	-27	-95.2	-51.54	-25	-26.54	V
7.52966	34.52	Pk	35.6	-23.9	-95.2	-48.98	-25	-23.98	V
10.20796	32.24	Pk	37.3	-20.2	-95.2	-45.86	-25	-20.86	V
Mid Channel, 2593MHz									
4.51218	37.53	Pk	33.7	-27.5	-95.2	-51.47	-25	-26.47	H
7.77855	34.67	Pk	35.7	-23.8	-95.2	-48.63	-25	-23.63	H
10.37418	31.71	Pk	37.5	-20	-95.2	-45.99	-25	-20.99	H
4.50485	37.32	Pk	33.7	-27.4	-95.2	-51.58	-25	-26.58	V
7.79486	34.49	Pk	35.7	-23.6	-95.2	-48.61	-25	-23.61	V
10.37654	31.65	Pk	37.5	-20	-95.2	-46.05	-25	-21.05	V
High Channel, 2680MHz									
5.36397	37.27	Pk	34.6	-26.8	-95.2	-50.13	-25	-25.13	H
8.02934	34.14	Pk	35.8	-23	-95.2	-48.26	-25	-23.26	H
10.7293	32.23	Pk	37.9	-19.7	-95.2	-44.77	-25	-19.77	H
5.38784	36.45	Pk	34.6	-26.5	-95.2	-50.65	-25	-25.65	V
8.00997	34.32	Pk	35.8	-23.6	-95.2	-48.68	-25	-23.68	V
10.85192	31.8	Pk	37.9	-20.2	-95.2	-45.7	-25	-20.7	V

QPSK 5G NR Band n41 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/23/202
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n41 FCC QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2546MHz									
5.07884	39.5	Pk	34.4	-27.8	-95.2	-48.4	-25	-23.4	H
5.10783	38.96	Pk	34.5	-27.8	-95.2	-48.74	-25	-23.74	V
7.6202	36.91	Pk	35.9	-23.5	-95.2	-45.49	-25	-20.49	V
7.65557	36.81	Pk	35.8	-23.5	-95.2	-45.79	-25	-20.79	H
10.17815	35.31	Pk	37.5	-20.9	-95.2	-42.69	-25	-17.69	H
10.17907	35.78	Pk	37.5	-20.9	-95.2	-42.22	-25	-17.22	V
Mid Channel, 2593MHz									
5.17145	39.25	Pk	34.6	-27.8	-95.2	-48.45	-25	-23.45	V
5.17448	39.77	Pk	34.6	-27.8	-95.2	-47.93	-25	-22.93	H
7.76937	35.8	Pk	35.9	-23.5	-95.2	-46.7	-25	-21.7	V
7.79543	35.59	Pk	36	-23.4	-95.2	-46.61	-25	-21.61	H
10.36382	35.44	Pk	37.7	-20.2	-95.2	-41.46	-25	-16.46	H
10.37375	34.92	Pk	37.7	-20.2	-95.2	-41.98	-25	-16.98	V
High Channel, 2640MHz									
5.28017	39.12	Pk	34.7	-27.9	-95.2	-48.98	-25	-23.98	V
5.28198	39.17	Pk	34.7	-28	-95.2	-49.03	-25	-24.03	H
7.91885	36.29	Pk	36.2	-23.4	-95.2	-45.91	-25	-20.91	V
7.91976	36.41	Pk	36.2	-23.4	-95.2	-45.79	-25	-20.79	H
10.55898	35.42	Pk	37.7	-20.5	-95.2	-41.88	-25	-16.88	H
10.55936	35.41	Pk	37.7	-20.5	-95.2	-41.89	-25	-16.89	V

9.2.22. LTE BAND 66

LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 66 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1720MHz									
3.42372	39.08	Pk	32.7	-29.2	-95.2	-52.62	-13	-39.62	H
5.18541	37.06	Pk	34.4	-27	-95.2	-50.74	-13	-37.74	H
6.81666	36.76	Pk	35.5	-25.1	-95.2	-48.04	-13	-35.04	H
3.4115	39.27	Pk	32.7	-29.3	-95.2	-52.53	-13	-39.53	V
5.19668	37.25	Pk	34.4	-27	-95.2	-50.55	-13	-37.55	V
6.78737	35.63	Pk	35.6	-25	-95.2	-48.97	-13	-35.97	V
Mid Channel, 1745MHz									
3.75396	38.49	Pk	32.9	-28.3	-95.2	-52.11	-13	-39.11	H
5.34742	37.27	Pk	34.6	-26.7	-95.2	-50.03	-13	-37.03	H
7.49108	35	Pk	35.6	-24	-95.2	-48.6	-13	-35.6	H
3.75964	38.52	Pk	32.9	-28.4	-95.2	-52.18	-13	-39.18	V
5.34076	37.73	Pk	34.6	-26.7	-95.2	-49.57	-13	-36.57	V
7.54843	34.63	Pk	35.6	-23.9	-95.2	-48.87	-13	-35.87	V
High Channel, 1770MHz									
3.55215	38.6	Pk	33	-28.4	-95.2	-52	-13	-39	H
5.35045	38.26	Pk	34.6	-26.7	-95.2	-49.04	-13	-36.04	H
7.1331	35.36	Pk	35.6	-24.5	-95.2	-48.74	-13	-35.74	H
3.56241	38.08	Pk	33	-28.5	-95.2	-52.62	-13	-39.62	V
5.33595	37.07	Pk	34.6	-26.7	-95.2	-50.23	-13	-37.23	V
7.18777	35.56	Pk	35.6	-24.6	-95.2	-48.64	-13	-35.64	V

9.2.23. LTE BAND 71

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 71 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode	LTE 71 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 673.0MHz									
1.3452	40.16	Pk	29.5	-32.3	-95.2	-57.84	-13	-44.84	H
2.02012	38.7	Pk	30.9	-30.9	-95.2	-56.5	-13	-43.5	H
2.69329	38.25	Pk	32.4	-29.9	-95.2	-54.45	-13	-41.45	H
1.34695	40.07	Pk	29.5	-32.3	-95.2	-57.93	-13	-44.93	V
2.01908	39.48	Pk	30.9	-31	-95.2	-55.82	-13	-42.82	V
2.69006	38.92	Pk	32.4	-30	-95.2	-53.88	-13	-40.88	V
Mid Channel, 680.5MHz									
1.36245	39.21	Pk	29.6	-32.2	-95.2	-58.59	-13	-45.59	H
2.04165	38.86	Pk	31	-30.9	-95.2	-56.24	-13	-43.24	H
2.72418	38.46	Pk	32.5	-30	-95.2	-54.24	-13	-41.24	H
1.36012	39.15	Pk	29.6	-32.3	-95.2	-58.75	-13	-45.75	V
2.04277	39.7	Pk	31	-30.9	-95.2	-55.4	-13	-42.4	V
2.72374	36.6	Pk	32.5	-30.1	-95.2	-56.2	-13	-43.2	V
High Channel, 688.0MHz									
1.37457	40.38	Pk	29.3	-32.3	-95.2	-57.82	-13	-44.82	H
2.06349	39.16	Pk	31.1	-31	-95.2	-55.94	-13	-42.94	H
2.75142	36.63	Pk	32.5	-30	-95.2	-56.07	-13	-43.07	H
1.37777	40	Pk	29.2	-32.3	-95.2	-58.3	-13	-45.3	V
2.06631	38.65	Pk	31.1	-31	-95.2	-56.45	-13	-43.45	V
2.75385	38.84	Pk	32.5	-30	-95.2	-53.86	-13	-40.86	V

9.3. FIELD STRENGTH OF SPURIOUS RADIATION, ANT3

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

RESULTS

Both QPSK and 16QAM modes are tested, widest QPSK bandwidths results are reported as worst case.

9.3.1. LTE BAND 2

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE2 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.72006	36.81	Pk	32.9	-28.4	-95.2	-53.89	-13	-40.89	H
5.58143	34.64	Pk	35.2	-26.7	-95.2	-52.06	-13	-39.06	H
7.44153	34.46	Pk	35.6	-24.3	-95.2	-49.44	-13	-36.44	H
3.72067	36.78	Pk	32.9	-28.4	-95.2	-53.92	-13	-40.92	V
5.57909	35.58	Pk	35.2	-26.7	-95.2	-51.12	-13	-38.12	V
7.43931	32.53	Pk	35.6	-24.3	-95.2	-51.37	-13	-38.37	V
Mid Channel, 1880MHz									
3.7613	37.18	Pk	33	-28.3	-95.2	-53.32	-13	-40.32	H
5.63969	36.02	Pk	35.1	-26.6	-95.2	-50.68	-13	-37.68	H
7.51915	33.22	Pk	35.5	-23.9	-95.2	-50.38	-13	-37.38	H
3.76138	36.81	Pk	33	-28.3	-95.2	-53.69	-13	-40.69	V
5.64031	35.7	Pk	35.1	-26.7	-95.2	-51.1	-13	-38.1	V
7.51888	33.51	Pk	35.5	-23.9	-95.2	-50.09	-13	-37.09	V
High Channel, 1900MHz									
3.79896	36.56	Pk	33	-28.3	-95.2	-53.94	-13	-40.94	H
5.69896	34.43	Pk	35	-26.6	-95.2	-52.37	-13	-39.37	H
7.60026	33.24	Pk	35.6	-24.1	-95.2	-50.46	-13	-37.46	H
3.80177	38.29	Pk	32.9	-28.3	-95.2	-52.31	-13	-39.31	V
5.69976	35.82	Pk	35	-26.6	-95.2	-50.98	-13	-37.98	V
7.59949	34.81	Pk	35.6	-24.1	-95.2	-48.89	-13	-35.89	V

9.3.3. LTE BAND 7

LIMITS

FCC: §27.53 (m)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE7 QPSK 20MHz
Chamber #:	Chamber i

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2510MHz									
5.02791	36.09	Pk	34.3	-27	-95.2	-51.81	-25	-26.81	H
7.54374	33.77	Pk	35.6	-23.9	-95.2	-49.73	-25	-24.73	H
10.41617	31.97	Pk	37.6	-20.8	-95.2	-46.43	-25	-21.43	H
5.02454	36.95	Pk	34.2	-27	-95.2	-51.05	-25	-26.05	V
7.54952	33.78	Pk	35.6	-23.8	-95.2	-49.62	-25	-24.62	V
10.48594	32.6	Pk	37.7	-20.6	-95.2	-45.5	-25	-20.5	V
Mid Channel, 2535MHz									
5.07004	35.89	Pk	34.3	-27.1	-95.2	-52.11	-25	-27.11	H
7.16077	34.29	Pk	35.7	-24.5	-95.2	-49.71	-25	-24.71	H
11.42963	31.09	Pk	38.1	-20.3	-95.2	-46.31	-25	-21.31	H
5.03978	36.21	Pk	34.3	-26.8	-95.2	-51.49	-25	-26.49	V
7.21227	34.49	Pk	35.6	-24.8	-95.2	-49.91	-25	-24.91	V
11.47822	32.15	Pk	38.1	-20.3	-95.2	-45.25	-25	-20.25	V
High Channel, 2560MHz									
5.1297	35.93	Pk	34.4	-27.1	-95.2	-51.97	-25	-26.97	H
7.67378	33.93	Pk	35.6	-23.9	-95.2	-49.57	-25	-24.57	H
10.27626	31.63	Pk	37.3	-20.5	-95.2	-46.77	-25	-21.77	H
5.10013	35.54	Pk	34.4	-26.8	-95.2	-52.06	-25	-27.06	V
7.70277	34.13	Pk	35.7	-23.8	-95.2	-49.17	-25	-24.17	V
10.32803	31.72	Pk	37.4	-20.1	-95.2	-46.18	-25	-21.18	V

9.3.4. LTE BAND 25

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	20792
Configuration:	EUT only
Mode	LTE25 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1860MHz									
3.71988	37.35	Pk	32.9	-28.4	-95.2	-53.35	-13	-40.35	H
5.58222	36.29	Pk	35.2	-26.7	-95.2	-50.41	-13	-37.41	H
7.44286	34.27	Pk	35.6	-24.3	-95.2	-49.63	-13	-36.63	H
3.71962	36.92	Pk	32.9	-28.4	-95.2	-53.78	-13	-40.78	V
5.57876	36.42	Pk	35.2	-26.7	-95.2	-50.28	-13	-37.28	V
7.44222	33.98	Pk	35.6	-24.3	-95.2	-49.92	-13	-36.92	V
Mid Channel, 1882.5MHz									
3.71988	37.35	Pk	32.9	-28.4	-95.2	-53.35	-13	-40.35	H
5.58222	36.29	Pk	35.2	-26.7	-95.2	-50.41	-13	-37.41	H
7.44286	34.27	Pk	35.6	-24.3	-95.2	-49.63	-13	-36.63	H
3.71962	36.92	Pk	32.9	-28.4	-95.2	-53.78	-13	-40.78	V
5.57876	36.42	Pk	35.2	-26.7	-95.2	-50.28	-13	-37.28	V
7.44222	33.98	Pk	35.6	-24.3	-95.2	-49.92	-13	-36.92	V
High Channel, 1905MHz									
3.80984	36.51	Pk	32.9	-28.4	-95.2	-54.19	-13	-41.19	H
5.71695	35.59	Pk	35	-26.7	-95.2	-51.31	-13	-38.31	H
7.62053	33.08	Pk	35.7	-24.1	-95.2	-50.52	-13	-37.52	H
3.81078	37.47	Pk	32.9	-28.4	-95.2	-53.23	-13	-40.23	V
5.71722	37.22	Pk	35	-26.7	-95.2	-49.68	-13	-36.68	V
7.61953	33.78	Pk	35.6	-24.1	-95.2	-49.92	-13	-36.92	V

9.3.5. LTE BAND 30

LIMITS

FCC: §27.53 (a)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	LTE30 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 2310MHz									
4.62009	36.52	Pk	33.9	-27.6	-95.2	-52.38	-40	-12.38	H
6.93015	34.88	Pk	35.6	-24.7	-95.2	-49.42	-40	-9.42	H
9.23919	33.09	Pk	36.4	-21.6	-95.2	-47.31	-40	-7.31	H
4.61922	36.97	Pk	33.9	-27.7	-95.2	-52.03	-40	-12.03	V
6.92928	35.62	Pk	35.6	-24.7	-95.2	-48.68	-40	-8.68	V
9.24045	33.12	Pk	36.3	-21.6	-95.2	-47.38	-40	-7.38	V

9.3.6. LTE BAND 41 AND 5G NR Band n41

LIMITS

FCC: §27.53 (m)

At least 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	LTE41FCC QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2506MHz									
5.01343	35.95	Pk	34.3	-27.1	-95.2	-52.05	-25	-27.05	H
7.51767	33.52	Pk	35.5	-23.9	-95.2	-50.08	-25	-25.08	H
10.02316	33.06	Pk	37.1	-20.8	-95.2	-45.84	-25	-20.84	H
5.01037	35.8	Pk	34.3	-27.2	-95.2	-52.3	-25	-27.3	V
7.51943	33.52	Pk	35.5	-23.9	-95.2	-50.08	-25	-25.08	V
10.02383	31.77	Pk	37.1	-20.7	-95.2	-47.03	-25	-22.03	V
Mid Channel, 2593MHz									
5.18607	35.48	Pk	34.4	-27	-95.2	-52.32	-25	-27.32	H
7.77994	32.84	Pk	35.7	-23.8	-95.2	-50.46	-25	-25.46	H
10.37209	31.6	Pk	37.4	-20	-95.2	-46.2	-25	-21.2	H
5.1849	35.86	Pk	34.4	-27	-95.2	-51.94	-25	-26.94	V
7.77739	33.39	Pk	35.7	-23.7	-95.2	-49.81	-25	-24.81	V
10.37095	31.52	Pk	37.4	-20.1	-95.2	-46.38	-25	-21.38	V
High Channel, 2680MHz									
5.36157	34.78	Pk	34.6	-26.8	-95.2	-52.62	-25	-27.62	H
8.03934	33.21	Pk	35.7	-22.9	-95.2	-49.19	-25	-24.19	H
10.72136	31.45	Pk	37.9	-19.8	-95.2	-45.65	-25	-20.65	H
5.35862	36.7	Pk	34.6	-26.8	-95.2	-50.7	-25	-25.7	V
8.03999	33.69	Pk	35.7	-23	-95.2	-48.81	-25	-23.81	V
10.71968	32.24	Pk	37.9	-19.7	-95.2	-44.76	-25	-19.76	V

QPSK 5G NR Band n41 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/17/2020
Test Engineer:	19169
Configuration:	EUT Only
Mode	5G NR Band n41 FCC QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2546MHz									
4.99274	39.22	Pk	34.1	-28.4	-95.2	-50.28	-25	-25.28	H
4.99374	39.28	Pk	34.1	-28.4	-95.2	-50.22	-25	-25.22	V
7.45751	36.76	Pk	36.2	-24	-95.2	-46.24	-25	-21.24	V
7.45931	36.53	Pk	36.2	-24	-95.2	-46.47	-25	-21.47	H
9.9843	35.01	Pk	37.2	-20.9	-95.2	-43.89	-25	-18.89	H
9.98464	35.72	Pk	37.2	-20.9	-95.2	-43.18	-25	-18.18	V
Mid Channel, 2593MHz									
5.18442	38.71	Pk	34.6	-27.7	-95.2	-49.59	-25	-24.59	V
5.18708	38.36	Pk	34.6	-27.7	-95.2	-49.94	-25	-24.94	H
7.77909	35.88	Pk	35.9	-23.4	-95.2	-46.82	-25	-21.82	H
7.7792	36.46	Pk	35.9	-23.4	-95.2	-46.24	-25	-21.24	V
10.36982	34.58	Pk	37.7	-20.2	-95.2	-43.12	-25	-18.12	H
10.37104	34.49	Pk	37.7	-20.2	-95.2	-43.21	-25	-18.21	V
High Channel, 2640MHz									
5.37942	-67.99	Pk	34.8	-27.8	10.5	-50.49	-25	-25.49	197
5.38203	-68.4	Pk	34.8	-27.8	10.6	-50.8	-25	-25.8	12
8.06898	-70.85	Pk	36.2	-23.2	11.2	-46.65	-25	-21.65	324
8.0694	-70.06	Pk	36.2	-23.2	11.4	-45.66	-25	-20.66	212
10.76057	-71.62	Pk	37.8	-20.2	10.3	-43.72	-25	-18.72	204
10.76138	-71.3	Pk	37.8	-20.2	10.6	-43.1	-25	-18.1	40

9.3.7. LTE BAND 66

LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 66 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1720MHz									
3.42372	39.08	Pk	32.7	-29.2	-95.2	-52.62	-13	-39.62	H
5.18541	37.06	Pk	34.4	-27	-95.2	-50.74	-13	-37.74	H
6.81666	36.76	Pk	35.5	-25.1	-95.2	-48.04	-13	-35.04	H
3.4115	39.27	Pk	32.7	-29.3	-95.2	-52.53	-13	-39.53	V
5.19668	37.25	Pk	34.4	-27	-95.2	-50.55	-13	-37.55	V
6.78737	35.63	Pk	35.6	-25	-95.2	-48.97	-13	-35.97	V
Mid Channel, 1745MHz									
3.75396	38.49	Pk	32.9	-28.3	-95.2	-52.11	-13	-39.11	H
5.34742	37.27	Pk	34.6	-26.7	-95.2	-50.03	-13	-37.03	H
7.49108	35	Pk	35.6	-24	-95.2	-48.6	-13	-35.6	H
3.76052	38.5	Pk	33	-28.4	-95.2	-52.1	-13	-39.1	V
5.34076	37.73	Pk	34.6	-26.7	-95.2	-49.57	-13	-36.57	V
7.54843	34.63	Pk	35.6	-23.9	-95.2	-48.87	-13	-35.87	V
High Channel, 1770MHz									
3.55215	38.6	Pk	33	-28.4	-95.2	-52	-13	-39	H
5.35045	38.26	Pk	34.6	-26.7	-95.2	-49.04	-13	-36.04	H
7.1331	35.36	Pk	35.6	-24.5	-95.2	-48.74	-13	-35.74	H
3.56241	38.08	Pk	33	-28.5	-95.2	-52.62	-13	-39.62	V
5.33595	37.07	Pk	34.6	-26.7	-95.2	-50.23	-13	-37.23	V
7.18777	35.56	Pk	35.6	-24.6	-95.2	-48.64	-13	-35.64	V

9.4. FIELD STRENGTH OF SPURIOUS RADIATION, ANT4

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

RESULTS

Both QPSK and 16QAM modes are tested, widest QPSK bandwidths results are reported as worst case.

9.4.1. LTE BAND 2

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE2 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.73168	37.24	Pk	32.9	-28.4	-95.2	-53.46	-13	-40.46	H
5.5532	38.52	Pk	35.1	-26.8	-95.2	-48.38	-13	-35.38	H
7.45559	33.85	Pk	35.6	-24.2	-95.2	-49.95	-13	-36.95	H
3.75151	37.32	Pk	33	-28.4	-95.2	-53.28	-13	-40.28	V
5.54852	36.2	Pk	35.1	-26.8	-95.2	-50.7	-13	-37.7	V
7.53359	33.98	Pk	35.6	-23.9	-95.2	-49.52	-13	-36.52	V
Mid Channel, 1880MHz									
3.74822	37.45	Pk	33	-28.3	-95.2	-53.05	-13	-40.05	H
5.65376	35.73	Pk	35	-26.8	-95.2	-51.27	-13	-38.27	H
7.5313	33.89	Pk	35.6	-23.9	-95.2	-49.61	-13	-36.61	H
3.74329	37.62	Pk	32.9	-28.3	-95.2	-52.98	-13	-39.98	V
5.64142	36.13	Pk	35.1	-26.6	-95.2	-50.57	-13	-37.57	V
7.52552	33.92	Pk	35.6	-23.9	-95.2	-49.58	-13	-36.58	V
High Channel, 1900MHz									
3.80702	37.51	Pk	32.9	-28.3	-95.2	-53.09	-13	-40.09	H
5.67331	39.99	Pk	35	-26.8	-95.2	-47.01	-13	-34.01	H
7.59364	34.46	Pk	35.6	-24.3	-95.2	-49.44	-13	-36.44	H
3.80658	37.48	Pk	32.9	-28.3	-95.2	-53.12	-13	-40.12	V
5.67293	36.71	Pk	35	-26.8	-95.2	-50.29	-13	-37.29	V
7.63948	34.03	Pk	35.6	-24.1	-95.2	-49.67	-13	-36.67	V

9.4.3. LTE BAND 7

LIMITS

FCC: §27.53 (m)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE7 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2510MHz									
5.02847	36.72	Pk	34.3	-27	-95.2	-51.18	-25	-26.18	H
7.49819	34.55	Pk	35.5	-23.9	-95.2	-49.05	-25	-24.05	H
10.07136	31.92	Pk	37	-20.9	-95.2	-47.18	-25	-22.18	H
5.0227	36.12	Pk	34.2	-27	-95.2	-51.88	-25	-26.88	V
7.52843	34.17	Pk	35.6	-23.9	-95.2	-49.33	-25	-24.33	V
10.07886	32.39	Pk	37.1	-20.8	-95.2	-46.51	-25	-21.51	V
Mid Channel, 2535MHz									
5.06499	36.29	Pk	34.3	-27	-95.2	-51.61	-25	-26.61	H
7.639	33.72	Pk	35.6	-24	-95.2	-49.88	-25	-24.88	H
10.17801	31.26	Pk	37.2	-20.2	-95.2	-46.94	-25	-21.94	H
5.04595	36.36	Pk	34.4	-26.9	-95.2	-51.34	-25	-26.34	V
7.63871	34.38	Pk	35.6	-24.1	-95.2	-49.32	-25	-24.32	V
10.15161	31.43	Pk	37.1	-20.3	-95.2	-46.97	-25	-21.97	V
High Channel, 2560MHz									
5.11911	36.13	Pk	34.4	-27	-95.2	-51.67	-25	-26.67	H
7.69246	33.78	Pk	35.7	-23.7	-95.2	-49.42	-25	-24.42	H
10.27163	31.82	Pk	37.4	-20.5	-95.2	-46.48	-25	-21.48	H
5.13875	37.15	Pk	34.5	-27.1	-95.2	-50.65	-25	-25.65	V
7.70879	34.72	Pk	35.6	-23.8	-95.2	-48.68	-25	-23.68	V
10.2839	31.83	Pk	37.4	-20.6	-95.2	-46.57	-25	-21.57	V

9.4.4. LTE BAND 25

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	LTE25 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1860MHz									
3.7233	37.21	Pk	32.9	-28.5	-95.2	-53.59	-13	-40.59	H
5.55317	38.58	Pk	35.1	-26.8	-95.2	-48.32	-13	-35.32	H
7.45443	34.41	Pk	35.6	-24.3	-95.2	-49.49	-13	-36.49	H
3.74592	37.7	Pk	32.9	-28.4	-95.2	-53	-13	-40	V
5.55381	36.43	Pk	35.1	-26.8	-95.2	-50.47	-13	-37.47	V
7.50174	33.76	Pk	35.5	-23.9	-95.2	-49.84	-13	-36.84	V
Mid Channel, 1882.5MHz									
3.80698	37.23	Pk	32.9	-28.3	-95.2	-53.37	-13	-40.37	H
5.62086	39.4	Pk	35.1	-26.7	-95.2	-47.4	-13	-34.4	H
7.62596	33.91	Pk	35.7	-24.2	-95.2	-49.79	-13	-36.79	H
3.80208	37.29	Pk	32.9	-28.3	-95.2	-53.31	-13	-40.31	V
5.64924	35.64	Pk	35	-26.6	-95.2	-51.16	-13	-38.16	V
7.61013	33.97	Pk	35.7	-24.1	-95.2	-49.63	-13	-36.63	V
High Channel, 1905MHz									
3.80636	37.83	Pk	32.9	-28.3	-95.2	-52.77	-13	-39.77	H
5.68827	40.55	Pk	35	-26.6	-95.2	-46.25	-13	-33.25	H
7.63206	34.02	Pk	35.6	-24	-95.2	-49.58	-13	-36.58	H
3.79633	37.68	Pk	33	-28.3	-95.2	-52.82	-13	-39.82	V
5.7313	35.8	Pk	34.9	-26.5	-95.2	-51	-13	-38	V
7.64218	34.25	Pk	35.6	-24.1	-95.2	-49.45	-13	-36.45	V

9.4.5. LTE BAND 30

LIMITS

FCC: §27.53 (a)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/30/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	LTE30 QPSK 10MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 2310MHz									
4.62493	37.72	Pk	33.9	-27.6	-95.2	-51.18	-40	-12.18	H
6.94715	34.37	Pk	35.6	-24.5	-95.2	-49.73	-40	-9.73	H
9.27023	32.28	Pk	36.4	-21.7	-95.2	-48.22	-40	-8.22	H
4.60662	36.69	Pk	33.9	-27.7	-95.2	-52.31	-40	-12.31	V
6.97284	34.48	Pk	35.7	-24.9	-95.2	-49.92	-40	-9.92	V
9.35786	32.71	Pk	36.4	-21.4	-95.2	-47.49	-40	-7.49	V

9.4.6. LTE BAND 41 AND 5G NR Band n41

LIMITS

FCC: §27.53 (m)

At least $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	5/1/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	LTE41 FCC QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2506MHz									
5.02465	37.34	Pk	34.2	-27	-95.2	-50.66	-25	-25.66	H
7.52572	33.46	Pk	35.6	-24	-95.2	-50.14	-25	-25.14	H
10.01261	31.57	Pk	37	-20.8	-95.2	-47.43	-25	-22.43	H
5.0277	36.37	Pk	34.3	-27	-95.2	-51.53	-25	-26.53	V
7.46427	34.07	Pk	35.5	-24.2	-95.2	-49.83	-25	-24.83	V
10.02746	31.92	Pk	37	-20.9	-95.2	-47.18	-25	-22.18	V
Mid Channel, 2593MHz									
5.19146	36.57	Pk	34.4	-27	-95.2	-51.23	-25	-26.23	H
7.79298	33.34	Pk	35.7	-23.6	-95.2	-49.76	-25	-24.76	H
10.36107	31.37	Pk	37.5	-20.2	-95.2	-46.53	-25	-21.53	H
5.20535	35.49	Pk	34.3	-26.8	-95.2	-52.21	-25	-27.21	V
7.79456	33.69	Pk	35.7	-23.6	-95.2	-49.41	-25	-24.41	V
10.35677	31.92	Pk	37.5	-20.2	-95.2	-45.98	-25	-20.98	V
High Channel, 2680MHz									
5.3574	35.98	Pk	34.6	-26.8	-95.2	-51.42	-25	-26.42	H
8.032	33.44	Pk	35.7	-23	-95.2	-49.06	-25	-24.06	H
10.72739	31.48	Pk	37.9	-19.7	-95.2	-45.52	-25	-20.52	H
5.36414	36.17	Pk	34.6	-26.8	-95.2	-51.23	-25	-26.23	V
8.03505	33.64	Pk	35.7	-23	-95.2	-48.86	-25	-23.86	V
10.72802	31.45	Pk	37.9	-19.8	-95.2	-45.65	-25	-20.65	V

QPSK 5G NR Band n41 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/23/202
Test Engineer:	19169
Configuration:	EUT Only
Mode	5G NR Band n41 FCC QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2546MHz									
5.08018	40.32	Pk	34.4	-27.8	-95.2	-47.58	-25	-22.58	H
5.08393	39.47	Pk	34.4	-27.8	-95.2	-48.33	-25	-23.33	V
7.64304	30.12	Pk	35.9	-23.6	-95.2	-52.38	-25	-27.38	V
7.64629	37.36	Pk	35.9	-23.6	-95.2	-45.14	-25	-20.14	H
10.16924	36.52	Pk	37.5	-20.9	-95.2	-41.58	-25	-16.58	H
10.17985	28.94	Pk	37.5	-20.9	-95.2	-49.06	-25	-24.06	V
Mid Channel, 2593MHz									
5.1994	31.96	Pk	34.6	-27.5	-95.2	-55.24	-25	-30.24	V
5.20041	39.97	Pk	34.6	-27.5	-95.2	-47.23	-25	-22.23	H
7.78136	36.99	Pk	35.9	-23.4	-95.2	-45.41	-25	-20.41	H
7.787	29.82	Pk	36	-23.4	-95.2	-52.38	-25	-27.38	V
10.39194	35.24	Pk	37.7	-20.3	-95.2	-41.76	-25	-16.76	H
10.41178	28.28	Pk	37.7	-20.1	-95.2	-48.52	-25	-23.52	V
High Channel, 2640MHz									
5.27962	38.94	Pk	34.7	-27.9	-95.2	-49.16	-25	-24.16	V
5.27992	38.52	Pk	34.7	-27.9	-95.2	-49.58	-25	-24.58	H
7.91801	36.58	Pk	36.2	-23.4	-95.2	-45.62	-25	-20.62	V
7.92194	36.49	Pk	36.2	-23.4	-95.2	-45.71	-25	-20.71	H
10.55879	35.15	Pk	37.7	-20.5	-95.2	-42.15	-25	-17.15	V
10.56008	34.93	Pk	37.7	-20.5	-95.2	-42.37	-25	-17.37	H

9.4.7. LTE BAND 48

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz .

QPSK LTE BAND 48 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	5/6/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	LTE48 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 3560MHz									
7.12085	33.07	Pk	35.7	-22.5	-95.2	-48.93	-40	-8.93	H
10.67967	31.45	Pk	37.9	-19.1	-95.2	-44.95	-40	-4.95	H
14.24215	31.99	Pk	39.4	-20.6	-95.2	-44.41	-40	-4.41	H
7.11852	33.74	Pk	35.7	-22.5	-95.2	-48.26	-40	-8.26	V
10.67944	31.55	Pk	37.9	-19.1	-95.2	-44.85	-40	-4.85	V
14.24178	31.31	Pk	39.4	-20.6	-95.2	-45.09	-40	-5.09	V
Mid Channel, 3625MHz									
7.24873	32.65	Pk	35.6	-22.3	-95.2	-49.25	-40	-9.25	H
10.87653	30.34	Pk	37.8	-18.9	-95.2	-45.96	-40	-5.96	H
14.49891	32.61	Pk	39.7	-20	-95.2	-42.89	-40	-2.89	H
7.24894	32.84	Pk	35.6	-22.3	-95.2	-49.06	-40	-9.06	V
10.8774	30.34	Pk	37.8	-18.9	-95.2	-45.96	-40	-5.96	V
14.50171	31.4	Pk	39.8	-20	-95.2	-44.00	-40	-4.00	V
High Channel, 3690MHz									
7.38	33.13	Pk	35.6	-22	-95.2	-48.47	-40	-8.47	H
11.07016	31.83	Pk	37.9	-19.3	-95.2	-44.77	-40	-4.77	H
14.76078	30.89	Pk	39.9	-20.5	-95.2	-44.91	-40	-4.91	H
7.37974	32.34	Pk	35.6	-22	-95.2	-49.26	-40	-9.26	V
11.06903	30.88	Pk	37.9	-19.3	-95.2	-45.72	-40	-5.72	V
14.76069	30.48	Pk	39.9	-20.5	-95.2	-45.32	-40	-5.32	V

9.4.8. LTE BAND 66

LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	4/29/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 66 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 1720MHz									
3.43388	37.6	Pk	32.7	-29.3	-95.2	-54.2	-13	-41.2	H
5.13328	37.75	Pk	34.4	-26.9	-95.2	-49.95	-13	-36.95	H
6.85813	35.2	Pk	35.6	-25.2	-95.2	-49.6	-13	-36.6	H
3.42705	37.49	Pk	32.7	-29.3	-95.2	-54.31	-13	-41.31	V
5.10801	36.02	Pk	34.4	-26.8	-95.2	-51.58	-13	-38.58	V
6.92874	34.71	Pk	35.6	-24.7	-95.2	-49.59	-13	-36.59	V
Mid Channel, 1745MHz									
3.51303	27.86	Pk	32.8	-28.7	-95.2	-63.24	-13	-50.24	H
5.24525	35.87	Pk	34.5	-26.8	-95.2	-51.63	-13	-38.63	H
6.99634	34.98	Pk	35.6	-24.8	-95.2	-49.42	-13	-36.42	H
3.55531	36.71	Pk	33	-28.5	-95.2	-53.99	-13	-40.99	V
5.20861	36.11	Pk	34.4	-26.8	-95.2	-51.49	-13	-38.49	V
6.92853	34.47	Pk	35.6	-24.7	-95.2	-49.83	-13	-36.83	V
High Channel, 1770MHz									
3.53841	38.08	Pk	30.2	-27.8	-95.2	-54.72	-13	-41.72	H
3.54105	38.65	Pk	30.2	-27.8	-95.2	-54.15	-13	-41.15	V
5.31087	37.78	Pk	33.2	-26.5	-95.2	-50.72	-13	-37.72	V
5.31104	37.74	Pk	33.2	-26.5	-95.2	-50.76	-13	-37.76	H
7.07909	36.19	Pk	36.6	-23.7	-95.2	-46.11	-13	-33.11	V
7.07917	36	Pk	36.6	-23.7	-95.2	-46.3	-13	-33.3	H

9.4.18. 5G NR Band n77

LIMITS

FCC: §27.53

(1) 3.7 GHz Service. The following emission limits apply to stations transmitting in the 3700-3980 MHz band:

(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

QPSK 5G NR Band n77 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/22/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n77 QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 3750MHz									
7.50349	36.29	Pk	36	-23.2	-95.2	-46.11	-13	-33.11	V
7.52728	35.98	Pk	36	-23.3	-95.2	-46.52	-13	-33.52	H
11.23494	33.61	Pk	38	-19.4	-95.2	-42.99	-13	-29.99	H
11.2582	33.92	Pk	38	-19.7	-95.2	-42.98	-13	-29.98	V
14.99592	34.26	Pk	39.8	-19.6	-95.2	-40.74	-13	-27.74	V
15.00918	34.78	Pk	39.9	-19.7	-95.2	-40.22	-13	-27.22	H
Mid Channel, 3840MHz									
7.6714	19.09	Av	35.9	-23.1	-95.2	-63.31	-13	-50.31	H
7.6841	18.98	Av	35.9	-22.8	-95.2	-63.12	-13	-50.12	V
11.50966	15.79	Av	38.4	-19.6	-95.2	-60.61	-13	-47.61	H
11.53507	15.77	Av	38.4	-19.8	-95.2	-60.83	-13	-47.83	V
15.35961	16.28	Av	41	-20.1	-95.2	-58.02	-13	-45.02	H
15.3629	16.02	Av	41	-20	-95.2	-58.18	-13	-45.18	V
High Channel, 3930MHz									
7.85926	36.11	Pk	36	-23.6	-95.2	-46.69	-13	-33.69	V
7.86116	37.2	Pk	36	-23.6	-95.2	-45.6	-13	-32.6	H
11.74278	33.86	Pk	38.7	-19.7	-95.2	-42.34	-13	-29.34	H
11.78452	33.98	Pk	38.8	-19.6	-95.2	-42.02	-13	-29.02	V
15.72361	34.66	Pk	40.7	-18.6	-95.2	-38.44	-13	-25.44	H
15.72963	34.28	Pk	40.7	-18.6	-95.2	-38.82	-13	-25.82	V

9.5. FIELD STRENGTH OF SPURIOUS RADIATION, ANT7

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

All tests below 1GHz were done with a Resolution Bandwidth of 100kHz, and a Video Bandwidth of 300kHz.

9.5.1. LTE BAND 48

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

QPSK LTE BAND 48 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/28/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode	LTE 48 QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346(dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 3560MHz									
5.07056	37.45	Pk	34.3	-28.6	-95.2	-52.05	-40	-12.05	H
5.17788	37.11	Pk	34.6	-28.6	-95.2	-52.09	-40	-12.09	V
6.76415	35.76	Pk	36	-25.6	-95.2	-49.04	-40	-9.04	V
6.81179	35.34	Pk	35.8	-25.4	-95.2	-49.46	-40	-9.46	H
9.4779	33.46	Pk	36.6	-22	-95.2	-47.14	-40	-7.14	H
9.48312	33.37	Pk	36.6	-22	-95.2	-47.23	-40	-7.23	V
Mid Channel, 3625MHz									
4.80004	37.06	Pk	34.3	-29.2	-95.2	-53.04	-40	-13.04	H
4.81125	37.5	Pk	34.3	-29.3	-95.2	-52.7	-40	-12.7	V
6.18785	36.14	Pk	35.7	-27.1	-95.2	-50.46	-40	-10.46	H
6.50658	36.34	Pk	35.8	-26.3	-95.2	-49.36	-40	-9.36	V
8.27822	34.64	Pk	35.9	-23.6	-95.2	-48.26	-40	-8.26	V
8.58355	34.22	Pk	35.9	-23.6	-95.2	-48.68	-40	-8.68	H
High Channel, 3690MHz									
5.21638	35.53	Pk	34.6	-28.5	-95.2	-53.57	-40	-13.57	V
5.22058	35.31	Pk	34.6	-28.5	-95.2	-53.79	-40	-13.79	H
6.48596	34.73	Pk	35.9	-26	-95.2	-50.57	-40	-10.57	V
6.87786	35.56	Pk	35.9	-25.1	-95.2	-48.84	-40	-8.84	H
9.47517	33.17	Pk	36.6	-22	-95.2	-47.43	-40	-7.43	V
9.5192	33.76	Pk	36.6	-22.4	-95.2	-47.24	-40	-7.24	H

9.5.2. 5G NR Band n77

LIMITS

FCC: §27.53

(1) 3.7 GHz Service. The following emission limits apply to stations transmitting in the 3700-3980 MHz band:

(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

QPSK 5G NR Band n77 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/22/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n77 QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 3750MHz									
7.50308	18.36	Av	36	-23.2	-95.2	-64.04	-13	-51.04	V
7.51459	18.69	Av	36	-23.3	-95.2	-63.81	-13	-50.81	H
11.24769	14.33	Av	38	-19.5	-95.2	-62.37	-13	-49.37	H
11.26752	14.45	Av	38	-19.7	-95.2	-62.45	-13	-49.45	V
15.01015	14.15	Av	39.9	-19.7	-95.2	-60.85	-13	-47.85	H
15.02952	13.95	Av	39.9	-19.6	-95.2	-60.95	-13	-47.95	V
Mid Channel, 3840MHz									
7.68089	18.81	Av	35.9	-22.9	-95.2	-63.39	-13	-50.39	H
7.68882	18.77	Av	35.8	-22.7	-95.2	-63.33	-13	-50.33	V
11.51613	15.53	Av	38.4	-19.6	-95.2	-60.87	-13	-47.87	H
11.52466	15.74	Av	38.4	-19.7	-95.2	-60.76	-13	-47.76	V
15.3503	16.6	Av	40.9	-20	-95.2	-57.7	-13	-44.7	V
15.38793	15.57	Av	41	-19.8	-95.2	-58.43	-13	-45.43	H
High Channel, 3930MHz									
7.85173	35.68	Pk	36	-23.7	-95.2	-47.22	-13	-34.22	V
7.8738	35.96	Pk	36.1	-23.5	-95.2	-46.64	-13	-33.64	H
11.72249	33.89	Pk	38.7	-19.9	-95.2	-42.51	-13	-29.51	H
11.80882	33.96	Pk	38.9	-19.3	-95.2	-41.64	-13	-28.64	V
15.69921	34.48	Pk	40.7	-19.2	-95.2	-39.22	-13	-26.22	H
15.70885	33.87	Pk	40.7	-19	-95.2	-39.63	-13	-26.63	V

9.6. FIELD STRENGTH OF SPURIOUS RADIATION, ANT8

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

All tests below 1GHz were done with a Resolution Bandwidth of 100kHz, and a Video Bandwidth of 300kHz.

9.6.1. LTE BAND 48

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

QPSK LTE BAND 48 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	5/6/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	LTE48 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 3560MHz									
7.1184	32.77	Pk	35.7	-22.5	-95.2	-49.23	-40	-9.23	H
10.67951	31.02	Pk	37.9	-19.1	-95.2	-45.38	-40	-5.38	H
14.2406	31.09	Pk	39.4	-20.6	-95.2	-45.31	-40	-5.31	H
7.11949	32.3	Pk	35.7	-22.5	-95.2	-49.7	-40	-9.7	V
10.67883	31.22	Pk	37.9	-19.1	-95.2	-45.18	-40	-5.18	V
14.23953	30.62	Pk	39.4	-20.6	-95.2	-45.78	-40	-5.78	V
Mid Channel, 3625MHz									
7.25118	32.58	Pk	35.6	-22.3	-95.2	-49.32	-40	-9.32	H
10.87503	30.5	Pk	37.8	-18.9	-95.2	-45.8	-40	-5.8	H
14.50034	31.55	Pk	39.7	-20	-95.2	-43.95	-40	-3.95	H
7.249	32.96	Pk	35.6	-22.3	-95.2	-48.94	-40	-8.94	V
10.8756	30.11	Pk	37.8	-18.9	-95.2	-46.19	-40	-6.19	V
14.50027	31.79	Pk	39.7	-20	-95.2	-43.71	-40	-3.71	V
High Channel, 3690MHz									
7.37929	32.42	Pk	35.6	-22	-95.2	-49.18	-40	-9.18	H
11.06848	31.69	Pk	37.9	-19.3	-95.2	-44.91	-40	-4.91	H
14.76174	30.57	Pk	39.9	-20.5	-95.2	-45.23	-40	-5.23	H
7.38024	32.84	Pk	35.6	-22	-95.2	-48.76	-40	-8.76	V
11.07041	31.46	Pk	37.9	-19.3	-95.2	-45.14	-40	-5.14	V
14.76035	30.49	Pk	39.9	-20.5	-95.2	-45.31	-40	-5.31	V

9.6.2. 5G NR Band n77

LIMITS

FCC: §27.53

(1) 3.7 GHz Service. The following emission limits apply to stations transmitting in the 3700-3980 MHz band:

(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

QPSK 5G NR Band n77 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/23/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n77 QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 3750MHz									
7.49777	35.48	Pk	36	-23.1	-95.2	-46.82	-13	-33.82	V
7.51047	35.91	Pk	36	-23.3	-95.2	-46.59	-13	-33.59	H
11.22566	26.33	Pk	38	-19.4	-95.2	-50.27	-13	-37.27	H
11.27719	34.16	Pk	38	-19.5	-95.2	-42.54	-13	-29.54	V
15.00917	35.11	Pk	39.9	-19.7	-95.2	-39.89	-13	-26.89	V
15.06425	34.22	Pk	40	-19.5	-95.2	-40.48	-13	-27.48	H
Mid Channel, 3840MHz									
7.68005	35.78	Pk	35.9	-22.9	-95.2	-46.42	-13	-33.42	V
7.68245	35.97	Pk	35.9	-22.8	-95.2	-46.13	-13	-33.13	H
11.51976	34.82	Pk	38.4	-19.6	-95.2	-41.58	-13	-28.58	V
11.52006	34.24	Pk	38.4	-19.6	-95.2	-42.16	-13	-29.16	H
15.35811	34.85	Pk	41	-20.1	-95.2	-39.45	-13	-26.45	V
15.36055	35.48	Pk	41	-20.1	-95.2	-38.82	-13	-25.82	H
High Channel, 3930MHz									
7.8471	35.92	Pk	36	-23.7	-95.2	-46.98	-13	-33.98	H
7.8702	35.96	Pk	36.1	-23.5	-95.2	-46.64	-13	-33.64	V
11.80285	33.94	Pk	38.8	-19.3	-95.2	-41.76	-13	-28.76	H
11.82308	34.61	Pk	38.8	-19.6	-95.2	-41.39	-13	-28.39	V
15.72951	35.24	Pk	40.7	-18.6	-95.2	-37.86	-13	-24.86	V
15.75636	36.46	Pk	40.7	-19.5	-95.2	-37.54	-13	-24.54	H

9.7. FIELD STRENGTH OF SPURIOUS RADIATION, ANT9

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

All tests below 1GHz were done with a Resolution Bandwidth of 100kHz, and a Video Bandwidth of 300kHz.

9.7.1. LTE BAND 48

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

QPSK LTE BAND 48 (20.0MHZ BANDWIDTH)

Project #:	13179116
Date:	5/6/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	LTE48 QPSK 20MHz
Chamber #:	Chamber I

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 3560MHz									
7.12943	34.09	Pk	35.6	-22.4	-95.2	-47.91	-40	-7.91	H
10.65014	31.51	Pk	37.9	-19	-95.2	-44.79	-40	-4.79	H
14.21584	31.65	Pk	39.3	-20.6	-95.2	-44.85	-40	-4.85	H
7.13029	33.9	Pk	35.6	-22.4	-95.2	-48.1	-40	-8.1	V
10.70698	31.41	Pk	37.8	-18.7	-95.2	-44.69	-40	-4.69	V
14.19554	32.1	Pk	39.3	-20.7	-95.2	-44.5	-40	-4.5	V
Mid Channel, 3625MHz									
7.24873	32.65	Pk	35.6	-22.3	-95.2	-49.25	-40	-9.25	H
10.87653	30.34	Pk	37.8	-18.9	-95.2	-45.96	-40	-5.96	H
14.49891	32.61	Pk	39.7	-20	-95.2	-42.89	-40	-2.89	H
7.24894	32.84	Pk	35.6	-22.3	-95.2	-49.06	-40	-9.06	V
10.8774	30.34	Pk	37.8	-18.9	-95.2	-45.96	-40	-5.96	V
14.50171	31.4	Pk	39.8	-20	-95.2	-44	-40	-4	V
High Channel, 3690MHz									
7.38	33.13	Pk	35.6	-22	-95.2	-48.47	-40	-8.47	H
11.07016	31.83	Pk	37.9	-19.3	-95.2	-44.77	-40	-4.77	H
14.76078	30.89	Pk	39.9	-20.5	-95.2	-44.91	-40	-4.91	H
7.37974	32.34	Pk	35.6	-22	-95.2	-49.26	-40	-9.26	V
11.06903	30.88	Pk	37.9	-19.3	-95.2	-45.72	-40	-5.72	V
14.76069	30.48	Pk	39.9	-20.5	-95.2	-45.32	-40	-5.32	V

9.7.2. 5G NR Band n77

LIMITS

FCC: §27.53

(1) 3.7 GHz Service. The following emission limits apply to stations transmitting in the 3700-3980 MHz band:

(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

QPSK 5G NR Band n77 (100.0MHZ BANDWIDTH)

Project #:	13179116
Date:	7/22/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode	5G NR Band n77 QPSK 100MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 3750MHz									
7.51433	35.64	Pk	36	-23.3	-95.2	-46.86	-13	-33.86	H
7.518	35.97	Pk	36	-23.3	-95.2	-46.53	-13	-33.53	V
11.23577	34.1	Pk	38	-19.4	-95.2	-42.5	-13	-29.5	H
11.24686	34.32	Pk	38	-19.5	-95.2	-42.38	-13	-29.38	V
14.98928	35.67	Pk	39.8	-19.5	-95.2	-39.23	-13	-26.23	V
14.99152	34.68	Pk	39.8	-19.5	-95.2	-40.22	-13	-27.22	H
Mid Channel, 3840MHz									
7.67354	19.22	Av	35.9	-23	-95.2	-63.08	-13	-50.08	H
11.5309	16.35	Av	38.5	-19.8	-95.2	-60.15	-13	-47.15	H
15.35512	16.25	Av	40.9	-20.1	-95.2	-58.15	-13	-45.15	H
7.69056	19.02	Av	35.8	-22.7	-95.2	-63.08	-13	-50.08	V
11.52662	16.31	Av	38.4	-19.7	-95.2	-60.19	-13	-47.19	V
15.32202	15.81	Av	40.9	-19.8	-95.2	-58.29	-13	-45.29	V
High Channel, 3930MHz									
7.84651	36.78	Pk	36	-23.7	-95.2	-46.12	-13	-33.12	H
7.86841	36.34	Pk	36.1	-23.5	-95.2	-46.26	-13	-33.26	V
11.68335	34.7	Pk	38.7	-19.7	-95.2	-41.5	-13	-28.5	V
11.75936	34.35	Pk	38.8	-19.7	-95.2	-41.75	-13	-28.75	H
15.68075	34.57	Pk	40.7	-19.4	-95.2	-39.33	-13	-26.33	H
15.69912	34.22	Pk	40.7	-19.2	-95.2	-39.48	-13	-26.48	V

10. SETUP PHOTOS

Please refer to 13179116-EP1V1 for setup photos

END OF REPORT

Appendix B – Reference Test Report 13171736-E8

Attached is the test report from A2402 / reference model. The ANT2 radiated spurious emission data from the reference report is being reused for the variant model described in this test report (13259310-E8).



TEST REPORT

Report Number. : 13171736-E8V3

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2402

FCC ID : BCG-E3543A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22H, 24E, 27, 90S, 90R, AND 96

Date Of Issue:
SEPTEMBER 29, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History



Rev.	Issue Date	Revisions	Revised By
V1	9/14/2020	Initial Review	Mengistu Mekuria
V2	9/15/2020	Address TCB Questions	John Thompson
V3	9/18/2020	5G NR band description	John Thompson
V4	9/29/2020	Updated Antenna gains, Updated spotcheck table to match Parent report for V4, Updated Section 5.8.	John Thompson

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. DECISION RULES	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. SAMPLE CALCULATION	7
5. INTRODUCTION OF TEST DATA REUSE	8
5.1. DESCRIPTION OF EUT	8
5.2. INTRODUCTION	8
5.3. MODEL DIFFERENCES	8
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY	9
5.5. REFERENCE DETAIL	10
5.6. SOFTWARE AND FIRMWARE	11
5.7. MAXIMUM ANTENNA GAIN	11
5.8. WORST-CASE CONFIGURATION AND MODE	12
5.9. DESCRIPTION OF TEST SETUP	14
6. TEST AND MEASUREMENT EQUIPMENT	16
7. RADIATED TEST RESULTS	17
7.1. FIELD STRENGTH OF SPURIOUS RADIATION, ABOVE 1GHz, ANT2	17
7.1.1. LTE BAND 2	18
7.1.2. LTE BAND 5 AND 5G NR BAND n5	19
7.1.3. LTE BAND 7	21
7.1.4. LTE BAND 12 AND 5G NR BAND n12	22
7.1.5. LTE BAND 13	24
7.1.6. LTE BAND 14	25
7.1.7. LTE BAND 17	26
7.1.8. LTE BAND 25	27
7.1.9. LTE BAND 26 (PART 90S)	28
7.1.10. LTE BAND 30	29

7.1.11.	LTE BAND 41 AND 5G NR BAND n41	30
7.1.12.	LTE BAND 66	32
7.1.13.	LTE BAND 71	33
8.	SETUP PHOTOS	34

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.	
Model	A2402	
FCC ID	BCG-E3543A	
EUT Description	SMARTPHONE	
Serial Number	MODEL (A2102): C070287008PP5595 (Conducted) and G6TD200504HT (Radiated)	
Date Tested	APRIL 21, 2020 to SEPTEMBER 29, 2020	
Applicable Standards	FCC CFR47 22H, 24E, 27, 90S, 90R, AND 96	
Test Results	COMPLIES	
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Lead Test Engineer UL Verification Services Inc.	Glenn Escano Project Engineer UL Verification Services Inc.	Sintia Andrean Laboratory Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90, and Part 96
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☒ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☐ Chamber I (IC: 2324A-5)
☒ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
	☐ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	☐ Chamber M (IC: 2324A-2)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

5. INTRODUCTION OF TEST DATA REUSE

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID BCG-E3542A to cover variant model BCG-E3543A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A2172 and A2402.

A2172 and A2402 are highly similar, with the only difference being the supported cellular bands.

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, NFC, WPT and UWB transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification and additional full radiated spurious emission test on ANT2 have been done on model A2402 in accordance with the test plan approved via KDB inquiry. Comparison of the models, upper deviation is within 3dB range and all tests are under FCC/ISED Technical Limits. The results documented for model A2172 may be applied as representative to model A2402.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY

A2402 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Channel	Measured Frequency MHz	Original Model: A2172 FCC ID: BCG-E3542A	Sub Model: A2402 FCC ID: BCG-E3543A	Delta (dB)	Remarks
LTE BAND 2	QPSK @ 20 MHz BW	EIRP	Low	1860	26 dBm	26 dBm	0	
	QPSK @ highest BW	RSE	Low	7092.05	-45.16 dBm	-45.87 dBm	-0.71	Noise Floor Level
LTE BAND 5	QPSK @ 10 MHz BW	ERP	High	844	18.35 dBm	18.35 dBm	0	
	QPSK @ highest BW	RSE	Mid	1668.51	-42.64 dBm	-58.17 dBm	-15.53	Noise Floor Level
5G NR BAND N5	QPSK @ 20 MHz BW	ERP	Mid	836.5	18.15 dBm	18.15 dBm	0	
	QPSK @ highest BW	RSE	High	2516.73	-45.74 dBm	-51.26 dBm	-5.52	Noise Floor Level
LTE BAND 7	QPSK @ 20 MHz BW	EIRP	Mid	2535	25.9 dBm	25.9 dBm	0	
	QPSK @ highest BW	RSE	High	10297.32	-43.33 dBm	-40.52 dBm	2.81	Noise Floor Level
LTE BAND 12	QPSK @ 10 MHz BW	ERP	High	711	18.55 dBm	18.35 dBm	-0.2	
	QPSK @ highest BW	RSE	Mid	2829.43				
5G NR BAND N12	QPSK @ 15 MHz BW	ERP	Mid	707.5	18.05 dBm	18.05 dBm	0	
	QPSK @ highest BW	RSE	Low	2818				
LTE BAND 13	QPSK @ 10 MHz BW	ERP	Mid	782	18.05 dBm	17.65 dBm	-0.4	
	QPSK @ highest BW	RSE	Mid	1563.95				
LTE BAND 14	QPSK @ 10 MHz BW	ERP	Mid	793	17.95 dBm	17.75 dBm	-0.2	
	QPSK @ highest BW	RSE	Mid	1587.34				
LTE BAND 17	QPSK @ 10 MHz BW	ERP	High	711	18.55 dBm	17.95 dBm	-0.6	
	QPSK @ highest BW	RSE	Mid	2840.43				
LTE BAND 25	QPSK @ 20 MHz BW	EIRP	Mid	1882.5	26 dBm	26 dBm	0	
	QPSK @ highest BW	RSE	Low	7428				
LTE BAND 26 (90S)	QPSK @ 10 MHz BW	ERP	Mid	819	18.35 dBm	18.35 dBm	0	
	QPSK @ highest BW	RSE	Mid	3274.57				
LTE BAND 30 (NS1)	QPSK @ 10 MHz BW	EIRP	Mid	2310	23.5 dBm	22.6 dBm	-0.9	
	QPSK @ highest BW	RSE	Mid	9246.62				
LTE BAND 41	QPSK @ 20 MHz BW	EIRP	Low	2506	26.9 dBm	26.9 dBm	0	
	QPSK @ highest BW	RSE	High	10709.39				
5G NR BAND N41	QPSK @ 100 MHz BW	EIRP	High	2640	27.6 dBm	26.1 dBm	-1.5	
	QPSK @ highest BW	RSE	Low	10363.82				
LTE BAND 48	QPSK @ 20 MHz BW	EIRP	Low	3560	22.7 dBm	21.9 dBm	-0.8	
	QPSK @ highest BW	RSE	Mid	14498.91				
LTE BAND 66	QPSK @ 20 MHz BW	EIRP	Mid	1745	23.8 dBm	23.5 dBm	-0.3	
	QPSK @ highest BW	RSE	Mid	6986.58				
LTE BAND 71	QPSK @ 20MHz BW	ERP	Low	673	17.65 dBm	17.15 dBm	-0.5	
	QPSK @ highest BW	RSE	Low	2021.01				
5G NR BAND N77	QPSK @ 100 MHz BW	EIRP	Low	3750	26.6 dBm	26.6 dBm	0	
	QPSK @ highest BW	RSE	High	15723.61				

5.5. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Reference Application	Report Title/Section
PCE, CBE	BCG-E3542A	13179116-E8	FCC LTE Report/ All Sections except Radiated spurious emission on ANT2

5.6. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.28.03-1.

5.7. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands AND 5G NR Bands	Antenna Gain (dBi)						
	ANT 1	ANT 2	ANT 3	ANT 4	ANT 7	ANT 8	ANT 9
LTE Band 71, 5G NR Band n71, 663 – 698 MHz	-5.9	-5.5	NA	NA	NA	NA	NA
LTE Band 12, 5G NR Band n12, 699 – 716 MHz	-5.0	-6.0	NA	NA	NA	NA	NA
LTE Band 17, 704 – 716 MHz	-5.0	-6.0	NA	NA	NA	NA	NA
LTE Band 13, 777 – 787 MHz	-5.5	-5.0	NA	NA	NA	NA	NA
LTE Band 14, 788 – 798 MHz	-5.6	-5.1	NA	NA	NA	NA	NA
LTE Band 26, 814 – 824 MHz (Part 90S)	-5.2	-5.8	NA	NA	NA	NA	NA
LTE Band 5, 5G NR Band n5, 824 – 849 MHz	-5.2	-5.6	NA	NA	NA	NA	NA
LTE Band 66, 5G NR Band n66, 1710 – 1780 MHz	-1.9	-2.0	-1.5	-3.0	NA	NA	NA
LTE Band 2, 5G NR Band n2, 1850 – 1910 MHz	-2.2	-3.9	1.0	-1.8	NA	NA	NA
LTE Band 25, 5G NR Band n25, 1850 – 1915 MHz	-2.2	-3.9	1.0	-1.8	NA	NA	NA
LTE Band 30, 2305 – 2315 MHz	-3.3	-2.1	-1.2	-2.3	NA	NA	NA
LTE Band 7, 2500 – 2570 MHz	-2.9	-0.4	0.9	-3.0	NA	NA	NA
LTE Band 41, 5G NR Band n41, 2496 – 2690 MHz	-2.5	-0.4	0.9	-2.8	NA	NA	NA
5G NR Band n77, 3300 – 3980 MHz	NA	NA	NA	-2.2	-0.1	-3.2	-2.9
LTE Band 48, 3550 – 3700 MHz	NA	NA	NA	-0.5	-0.1	-5.3	-0.9

5.8. WORST-CASE CONFIGURATION AND MODE

The EUT supports the following LTE and 5G NR Bands:

Band 2, Band 4, Band 5, Band 7, Band 12, Band 13, Band 14, Band 17, Band 25, Band 26, Band 30, Band 41, Band 48, Band 66, Band 71, 5G NR Band n2, 5G NR Band n5, 5G NR Band n12, 5G NR Band n25, 5G NR Band n41, 5G NR Band n66, 5G NR Band n71 and 5G NR Band n77.

For 5G NR Bands (n2, n5, n12, n25, n41, n66, and n71) having the same operations bandwidth and Power are covered by LTE bands of (Band 2, Band5, Band12, Band 25, Band 41, Band 66, and Band 71). Additional tests for 5G NR bands with higher BW modes than LTE Bands, includes 5G NR Bands n5, n12, and n41 were performed.

LTE Band 4 (1710-1755MHz, 5/10/15/20MHz bandwidth) is covered by LTE Band 66 because it is a subset of LTE band 66 and they have same output power.

FCC rule Part 22.905 of LTE Band 26 (824-849MHz) is covered by LTE Band 5 of same rule since they have the same output power and supported bandwidths.

For 5G NR bands, conducted spurious emission tests were conducted on wider bandwidth with inner 1RB since this is the worst bandwidth and the highest output power.

BPSK modulation applied only for 5G NR band frequencies and has the same tune up power as QPSK modulations.

The DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation and QPSK was observed as the worst one and set for all conducted and radiated. Output power measurements were measured on QPSK, 16QAM, 64QAM, 256QAM, and BPSK, modulations. For testing purposes emissions on sections 8 and 9 were measured while QPSK was set at or above target power for all bands. Conducted tests were performed on the worst case antenna because it has the highest conducted power. ANT1 is the worst case for all bands except Band 48, 5G NR Band 41, and 5G NR Band 77. For 5G NR Band 41 ANT2 is the worst case antenna. For band 48 ANT9 is the worst case antenna. For 5G NR Band n77 ANT7 is the worst case antenna.

For 5G NR Band n41 20MHz BW, antenna 2 and antenna 4 powers are higher than LTE band 41. Therefore, additional power measurements and occupied bandwidth tests were performed on antenna 2 and antenna 4 for 20MHz BW. Since LTE antenna 1 the highest output power of all (LTE band 41 and 5G NR Band n41) antennas, all other conducted tests for 20MHz BW were performed only on LTE antenna 1.

The EUT was investigated in three orthogonal orientations X/Y/Z on all ANT 1, ANT2, ANT3, ANT4, ANT7, ANT8 and ANT 9 antennas to determine the worst case orientation. The following table exhibit the worst case orientation for different frequency bands. The full tests of the EUT have made upon the orientations that shown in the table below.

Freq Bands	ANT1	ANT2	ANT3	ANT4	ANT7	ANT8	ANT9
663 – 849 MHz	Y	X	N/A	N/A	N/A	N/A	N/A
1710 – 1915 MHz	X	X	X	X	N/A	N/A	N/A
2300 – 2700 MHz	Y	Y	Y	X	N/A	N/A	N/A
3300 – 3980 MHz	N/A	N/A	N/A	X	Y	X	Y


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GH WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


5.9. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop AC/DC adapter		Apple	85W MagSafe 2	C0651730MMMG6P4AL		
Laptop		Apple	Macbook Pro	C02PM012G3QD		
Laptop		Apple	Macbook Pro	C02P52HGG085		
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Shielded	5.0	N/A

CONDUCTED SETUP

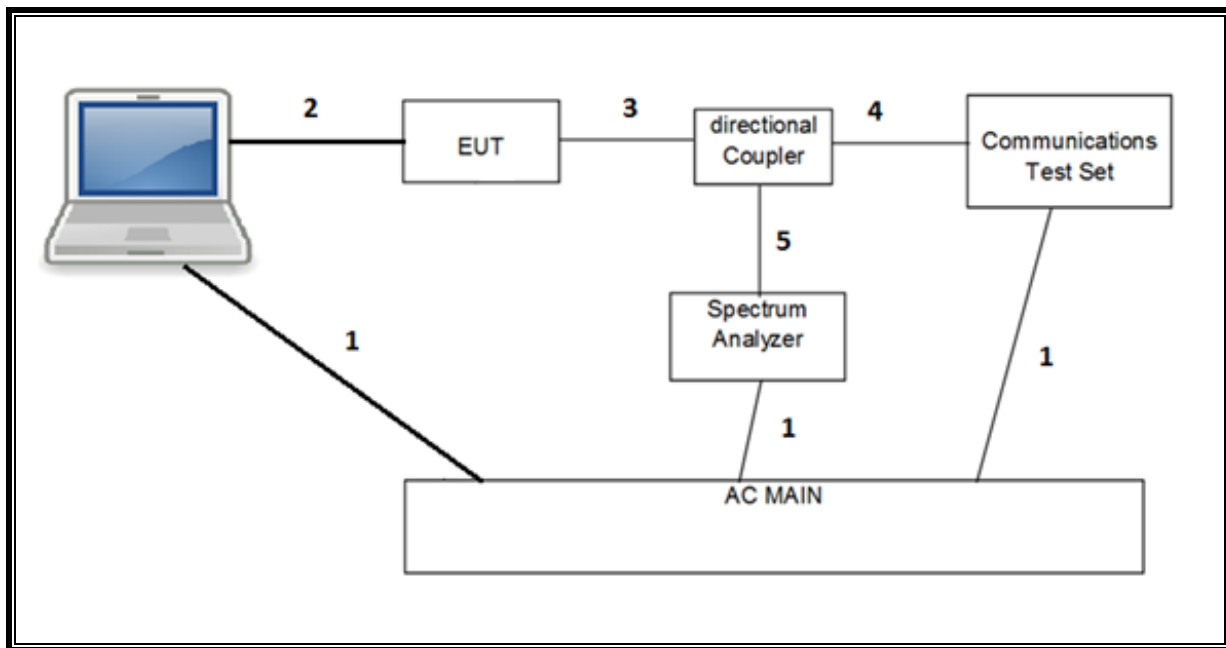

RADIATED SETUP

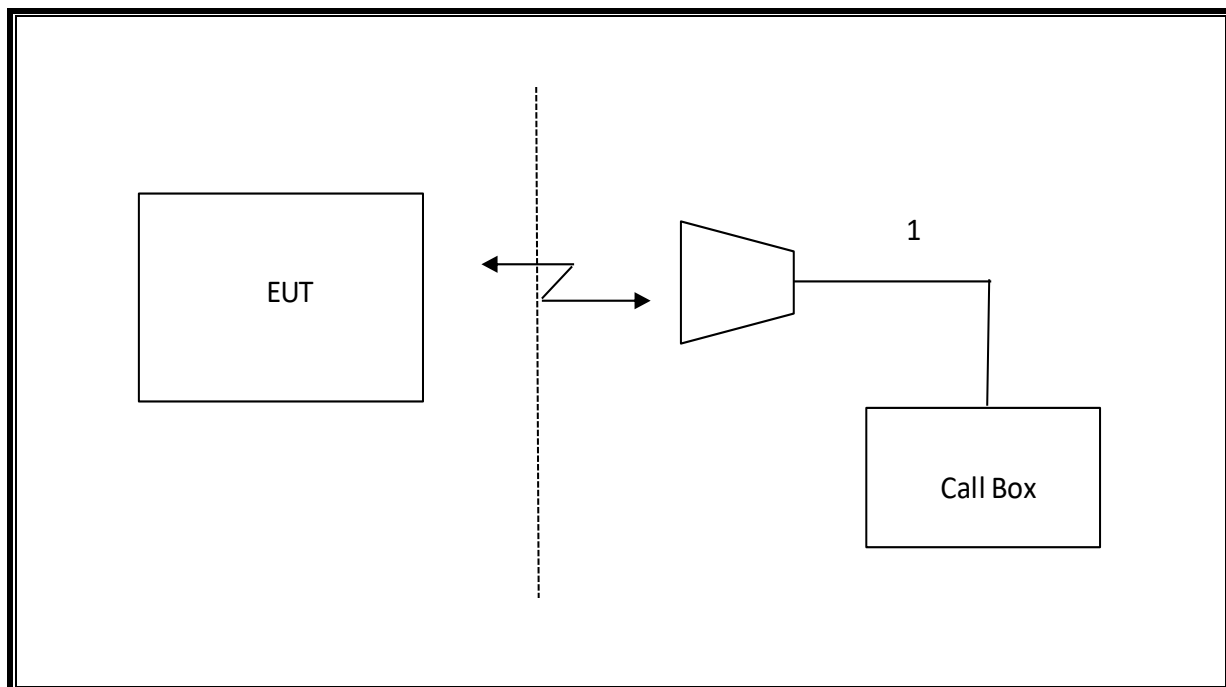

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	A.H. Systems, Inc.	SAS-571	T961	01/25/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	07/07/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	05/20/2021
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T931	05/11/2021
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T1165	08/10/2021
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	PRE0180176	07/14/2021
Filter, BRF 2495 to 2690MHz	MICRO-TRONICS	BRM50709-02	T1790	06/23/2021
Filter, BRF 1850 – 1910 MHz	Micro-Tronics	BRM50714-02	T1796	06/23/2021
Filter, BRF 824 – 848 MHz	Micro-Tronics	BRM20025	PRE0191180	06/23/2021
*Directional Coupler	KRYTAR	152610	T1161	08/14/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	01/22/2021
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T907	01/22/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T260	02/19/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	02/19/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T1871	02/25/2021
Power Meter, P-series single channel	Keysight	N1912A	T1245	01/22/2021
Power Sensor	Keysight	N1921A	T1225	02/23/2021
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017	
Power Measurement Software	UL	UL RF	Ver 2.7, 2019	
Radiated test software	UL	UL RF	Ver 9.5 June 15, 2019	

NOTES:

* Testing is completed before equipment expiration date.

7. RADIATED TEST RESULTS

7.1. FIELD STRENGTH OF SPURIOUS RADIATION, ABOVE 1GHz, ANT2

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02/r01

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz.

RESULTS

7.1.1. LTE BAND 2

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/18/2020
Test Engineer:	30606
Configuration:	EUT only
Mode	LTE2 QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.73825	39.82	Pk	30.5	-27.8	-95.2	-52.68	-13	-39.68	H
3.74672	39.45	Pk	30.6	-27.7	-95.2	-52.85	-13	-39.85	V
5.62699	37.85	Pk	33.2	-26	-95.2	-50.15	-13	-37.15	H
5.62965	37.89	Pk	33.2	-26.1	-95.2	-50.21	-13	-37.21	V
7.52226	36.01	Pk	36.7	-23.9	-95.2	-46.39	-13	-33.39	V
7.53949	36.43	Pk	36.8	-23.9	-95.2	-45.87	-13	-32.87	H
Mid Channel, 1880MHz									
3.77332	39.21	Pk	30.7	-27.8	-95.2	-53.09	-13	-40.09	H
3.78016	39.65	Pk	30.8	-27.8	-95.2	-52.55	-13	-39.55	V
5.63442	38.29	Pk	33.1	-26	-95.2	-49.81	-13	-36.81	H
5.67592	36.94	Pk	33	-25.7	-95.2	-50.96	-13	-37.96	V
7.50432	36.56	Pk	36.7	-23.9	-95.2	-45.84	-13	-32.84	V
7.5081	36.37	Pk	36.8	-23.9	-95.2	-45.93	-13	-32.93	H
High Channel, 1900MHz									
3.77691	39.77	Pk	30.7	-27.8	-95.2	-52.53	-13	-39.53	V
3.78476	39.76	Pk	30.8	-27.8	-95.2	-52.44	-13	-39.44	H
5.67276	36.88	Pk	33	-25.7	-95.2	-51.02	-13	-38.02	V
5.71393	39.5	Pk	33	-25.4	-95.2	-48.1	-13	-35.1	H
7.60862	36.63	Pk	37	-23.7	-95.2	-45.27	-13	-32.27	V
7.61466	36.37	Pk	36.9	-23.6	-95.2	-45.53	-13	-32.53	H

7.1.2. LTE BAND 5 AND 5G NR BAND n5

LIMITS

FCC: §22.917(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 5 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	7/29/2020
Test Engineer:	19140
Configuration:	EUT only
Mode	LTE5 QPSK 10MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 829MHz									
1.65722	41.44	Pk	25	-30.5	-95.2	-58.46	-13	-45.46	V
1.65923	40.35	Pk	25	-30.4	-95.2	-59.45	-13	-46.45	H
2.48663	40.22	Pk	29	-29.2	-95.2	-54.68	-13	-41.68	V
2.48914	39.62	Pk	29	-29.2	-95.2	-55.18	-13	-42.18	H
3.3155	39.58	Pk	31.1	-28	-95.2	-51.92	-13	-38.92	V
3.31571	39.31	Pk	31.1	-28	-95.2	-52.19	-13	-39.19	H
Mid Channel, 836.5MHz									
1.67288	41.03	Pk	25	-30.4	-95.2	-58.87	-13	-45.87	V
1.67509	41.73	Pk	25	-30.4	-95.2	-58.17	-13	-45.17	H
2.50809	40.54	Pk	29.1	-29.3	-95.2	-54.16	-13	-41.16	V
2.50813	40.47	Pk	29.1	-29.3	-95.2	-54.23	-13	-41.23	H
3.34395	38.06	Pk	31	-28.2	-95.2	-53.74	-13	-40.74	V
3.34745	38.29	Pk	31	-28.2	-95.2	-53.51	-13	-40.51	H
High Channel, 844MHz									
1.68737	41.05	Pk	25	-30.4	-95.2	-58.85	-13	-45.85	V
1.68794	40.92	Pk	25	-30.4	-95.2	-58.98	-13	-45.98	H
2.53183	38.51	Pk	29.2	-29.3	-95.2	-55.99	-13	-42.99	V
2.53198	38.85	Pk	29.2	-29.3	-95.2	-55.65	-13	-42.65	H
3.37505	39.34	Pk	30.8	-28	-95.2	-52.46	-13	-39.46	V
3.37576	39.05	Pk	30.8	-28	-95.2	-52.75	-13	-39.75	H

QPSK 5G NR BAND n5 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	7/30/2020
Test Engineer:	19169
Configuration:	EUT only
Mode	5G NR n5 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 834MHz									
1.65819	40.67	Pk	29	-32.3	-95.2	-57.03	-13	-44.03	H
1.66393	41.43	Pk	29	-32.2	-95.2	-56.17	-13	-43.17	V
2.49905	41.35	Pk	33.5	-31.4	-95.2	-51.15	-13	-38.15	V
2.50347	40.51	Pk	33.5	-31.3	-95.2	-51.79	-13	-38.79	H
3.32883	39.61	Pk	33	-30.2	-95.2	-52.19	-13	-39.19	H
3.33058	40.09	Pk	33	-30.2	-95.2	-51.81	-13	-38.81	V
Mid Channel, 836.5MHz									
1.67993	41.98	Pk	28.9	-32.2	-95.2	-55.82	-13	-42.82	H
1.68904	42.11	Pk	29.1	-32.2	-95.2	-55.49	-13	-42.49	V
2.50457	41.11	Pk	33.5	-31.4	-95.2	-51.29	-13	-38.29	H
2.51142	40.99	Pk	33.5	-31.4	-95.2	-51.41	-13	-38.41	V
3.35412	39.7	Pk	33	-30.1	-95.2	-52	-13	-39	H
3.36264	39.39	Pk	33	-30.1	-95.2	-52.31	-13	-39.31	V
High Channel, 839MHz									
1.67683	41.82	Pk	28.9	-32.2	-95.2	-55.98	-13	-42.98	V
1.67965	42.06	Pk	28.9	-32.2	-95.2	-55.74	-13	-42.74	H
2.51691	40.87	Pk	33.5	-31.4	-95.2	-51.53	-13	-38.53	V
2.51746	41.04	Pk	33.5	-31.3	-95.2	-51.26	-13	-38.26	H
3.35412	41.08	Pk	33	-30.1	-95.2	-50.62	-13	-37.62	V
3.35413	40.31	Pk	33	-30.1	-95.2	-51.39	-13	-38.39	H

7.1.3. LTE BAND 7

LIMITS

FCC: §27.53 (m)

At least 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/18/2020
Test Engineer:	50820
Configuration:	EUT only
Mode	LTE7 QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2510MHz									
5.02141	38.29	Pk	33.7	-25.9	-95.2	-49.11	-25	-24.11	H
5.02225	37.59	Pk	33.7	-25.9	-95.2	-49.81	-25	-24.81	V
7.52852	35.91	Pk	36.9	-23.9	-95.2	-46.29	-25	-21.29	V
7.53135	35.36	Pk	36.9	-23.8	-95.2	-46.74	-25	-21.74	H
10.04015	33.98	Pk	38.4	-20	-95.2	-42.82	-25	-17.82	V
10.04036	34.68	Pk	38.4	-20	-95.2	-42.12	-25	-17.12	H
Mid Channel, 2535MHz									
5.07252	-69.6	Pk	33.8	-26.1	8.4	-53.5	-25	-28.5	236
5.07274	-69.64	Pk	33.8	-26.1	8.5	-53.44	-25	-28.44	61
7.60551	-71.05	Pk	37	-23.7	7.7	-50.05	-25	-25.05	130
7.60638	-71.59	Pk	37	-23.7	7.5	-50.79	-25	-25.79	184
10.13975	-72.76	Pk	38.4	-19.9	6.4	-47.86	-25	-22.86	97
10.14199	-72.87	Pk	38.4	-20	6.5	-47.97	-25	-22.97	351
High Channel, 2560MHz									
5.12	37.56	Pk	33.9	-26.4	-95.2	-50.14	-25	-25.14	H
5.12083	37.47	Pk	33.9	-26.4	-95.2	-50.23	-25	-25.23	V
7.67892	35.33	Pk	37	-23.3	-95.2	-46.17	-25	-21.17	H
7.67968	35.13	Pk	37	-23.3	-95.2	-46.37	-25	-21.37	V
10.24059	35.12	Pk	38.8	-19.4	-95.2	-40.68	-25	-15.68	V
10.24267	34.28	Pk	38.8	-19.4	-95.2	-41.52	-25	-16.52	H

7.1.4. LTE BAND 12 AND 5G NR BAND n12

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 12 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/22/2020
Test Engineer:	29435
Configuration:	EUT only
Mode	LTE12 QPSK 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 704MHz									
1.40792	40.72	Pk	25.4	-30.8	-95.2	-59.88	-13	-46.88	V
1.40999	40.87	Pk	25.4	-30.8	-95.2	-59.73	-13	-46.73	H
2.11202	39.35	Pk	26.9	-29.5	-95.2	-58.45	-13	-45.45	V
2.1127	39.66	Pk	26.9	-29.5	-95.2	-58.14	-13	-45.14	H
2.81491	37.96	Pk	28.8	-28.7	-95.2	-57.14	-13	-44.14	V
2.81563	38.13	Pk	28.8	-28.7	-95.2	-56.97	-13	-43.97	H
Mid Channel, 707.5MHz									
1.41363	40.22	Pk	25.4	-30.7	-95.2	-60.28	-13	-47.28	H
1.41519	41.02	Pk	25.3	-30.7	-95.2	-59.58	-13	-46.58	H
1.41661	41.43	Pk	25.3	-30.7	-95.2	-59.17	-13	-46.17	V
2.12223	38.58	Pk	26.9	-29.6	-95.2	-59.32	-13	-46.32	V
2.82923	37.92	Pk	28.8	-28.7	-95.2	-57.18	-13	-44.18	V
2.83121	38.89	Pk	28.8	-28.7	-95.2	-56.21	-13	-43.21	H
High Channel, 711MHz									
1.42192	-66.32	Pk	25.3	-30.7	8.8	-62.92	-13	-49.92	164
1.423	-66.38	Pk	25.3	-30.7	8.7	-63.08	-13	-50.08	201
2.13156	-67.93	Pk	26.9	-29.6	10.3	-60.33	-13	-47.33	176
2.13223	-68.01	Pk	26.9	-29.6	11.1	-59.61	-13	-46.61	153
2.84251	-68.08	Pk	28.8	-28.7	9.2	-58.78	-13	-45.78	187
2.84526	-68.28	Pk	28.9	-28.7	8.7	-59.38	-13	-46.38	187

QPSK 5G NR BAND n12 (15.0MHZ BANDWIDTH)

Project #:	13171736
Date:	7/20/2020
Test Engineer:	30606
Configuration:	EUT only
Mode	5G NR n12 QPSK 15MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 706.5MHz									
1.42067	41.8	Pk	29	-32.6	-95.2	-56.1	-13	-43.1	H
1.43191	41.49	Pk	29	-32.5	-95.2	-56.31	-13	-43.31	V
2.09945	40.76	Pk	31.9	-31.8	-95.2	-53.84	-13	-40.84	H
2.10932	40.7	Pk	31.7	-31.9	-95.2	-54.2	-13	-41.2	V
2.818	40.96	Pk	32.6	-30.7	-95.2	-51.74	-13	-38.74	H
2.82605	40.45	Pk	32.6	-30.6	-95.2	-52.05	-13	-39.05	V
Mid Channel, 707.5MHz									
1.4085	41.65	Pk	29.1	-32.7	-95.2	-56.25	-13	-43.25	H
1.41462	42.67	Pk	29.1	-32.7	-95.2	-55.23	-13	-42.23	V
2.12027	41.52	Pk	31.6	-31.7	-95.2	-53.28	-13	-40.28	H
2.1289	40.45	Pk	31.5	-31.5	-95.2	-54.25	-13	-41.25	V
2.83486	40.1	Pk	32.5	-30.6	-95.2	-52.5	-13	-39.5	H
2.83673	40.58	Pk	32.5	-30.6	-95.2	-52.02	-13	-39.02	V
High Channel, 708.5MHz									
1.4148	42.03	Pk	29.1	-32.7	-95.2	-55.87	-13	-42.87	H
1.41816	42.03	Pk	29.1	-32.6	-95.2	-55.77	-13	-42.77	V
2.11478	41.75	Pk	31.7	-31.8	-95.2	-53.05	-13	-40.05	H
2.11646	41.42	Pk	31.7	-31.8	-95.2	-53.38	-13	-40.38	V
2.83381	40.36	Pk	32.5	-30.6	-95.2	-52.24	-13	-39.24	H
2.83524	39.95	Pk	32.5	-30.6	-95.2	-52.65	-13	-39.65	V

7.1.5. LTE BAND 13

LIMITS

FCC: §27.53

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

QPSK LTE BAND 13 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/22/2020
Test Engineer:	19169
Configuration:	EUT only
Mode	LTE13 QPSK 10MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 782MHz									
1.56286	40.04	Pk	24.9	-30.5	-95.2	-60.76	-40	-20.76	H
1.56463	40.36	Pk	24.9	-30.5	-95.2	-60.44	-40	-20.44	V
2.34537	39.15	Pk	28	-29.5	-95.2	-57.55	-13	-44.55	H
2.34538	39.45	Pk	28	-29.5	-95.2	-57.25	-13	-44.25	V
3.12927	38.87	Pk	30.7	-28.5	-95.2	-54.13	-13	-41.13	V
3.12961	39.39	Pk	30.7	-28.5	-95.2	-53.61	-13	-40.61	H

7.1.6. LTE BAND 14

LIMITS

FCC: §90.543 Emission Limitations. (Band 14)

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation

QPSK LTE BAND 14 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	6/16/2020
Test Engineer:	19410
Configuration:	EUT only
Mode	LTE14 QPSK 10MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 793MHz									
1.58491	40.52	Pk	24.9	-30.5	-95.2	-60.28	-40	-20.28	H
1.58496	40.99	Pk	24.9	-30.5	-95.2	-59.81	-40	-10.81	V
2.37817	39.91	Pk	28.3	-29.5	-95.2	-56.49	-13	-43.49	V
2.38053	39.54	Pk	28.4	-29.5	-95.2	-56.76	-13	-43.76	H
3.17178	38.45	Pk	31	-28.5	-95.2	-54.25	-13	-41.25	V
3.17264	38.15	Pk	31.1	-28.5	-95.2	-54.45	-13	-41.45	H

7.1.7. LTE BAND 17

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 17 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	6/26/2020
Test Engineer:	50820
Configuration:	EUT only
Mode	LTE17 QPSK 10MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 710MHz									
1.42023	40.17	Pk	25.3	-30.7	-95.2	-60.43	-13	-47.43	V
1.42132	40.02	Pk	25.3	-30.7	-95.2	-60.58	-13	-47.58	H
2.1294	39.06	Pk	26.9	-29.6	-95.2	-58.84	-13	-45.84	H
2.13196	39.64	Pk	26.9	-29.6	-95.2	-58.26	-13	-45.26	V
2.84074	37.94	Pk	28.8	-28.7	-95.2	-57.16	-13	-44.16	H
2.84153	38.72	Pk	28.8	-28.7	-95.2	-56.38	-13	-43.38	V

7.1.8. LTE BAND 25

LIMITS

FCC: §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/18/2020
Test Engineer:	30606
Configuration:	EUT only
Mode	LTE25 QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1860MHz									
3.69309	39.71	Pk	30.3	-27.6	-95.2	-52.79	-13	-39.79	V
3.73179	39.57	Pk	30.5	-27.8	-95.2	-52.93	-13	-39.93	H
5.55951	37.82	Pk	33.2	-26.1	-95.2	-50.28	-13	-37.28	V
5.57143	41.99	Pk	33.2	-26	-95.2	-46.01	-13	-33.01	H
7.46356	36.75	Pk	36.7	-23.8	-95.2	-45.55	-13	-32.55	V
7.46843	36.17	Pk	36.7	-23.8	-95.2	-46.13	-13	-33.13	H
Mid Channel, 1882.5MHz									
3.78711	39.55	Pk	30.8	-27.8	-95.2	-52.65	-13	-39.65	V
3.79153	39.97	Pk	30.8	-27.8	-95.2	-52.23	-13	-39.23	H
5.65161	38.74	Pk	33	-25.8	-95.2	-49.26	-13	-36.26	H
5.65464	38.44	Pk	33.1	-25.9	-95.2	-49.56	-13	-36.56	V
7.53553	36.78	Pk	36.9	-23.9	-95.2	-45.42	-13	-32.42	H
7.55651	36.75	Pk	36.8	-24	-95.2	-45.65	-13	-32.65	V
High Channel, 1905MHz									
3.8029	39.63	Pk	30.9	-27.8	-95.2	-52.47	-13	-39.47	H
3.8286	39.2	Pk	31.1	-27.8	-95.2	-52.7	-13	-39.7	V
5.70322	38.43	Pk	33.1	-25.4	-95.2	-49.07	-13	-36.07	H
5.72376	38.89	Pk	33	-25.4	-95.2	-48.71	-13	-35.71	V
7.60472	36.85	Pk	37	-23.7	-95.2	-45.05	-13	-32.05	H
7.61949	36.62	Pk	37	-23.6	-95.2	-45.18	-13	-32.18	V

7.1.9. LTE BAND 26 (PART 90S)

LIMITS

FCC: §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 26 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	6/14/2020
Test Engineer:	19212
Configuration:	EUT only
Mode	LTE26 QPSK 10MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 819MHz									
1.63713	35.12	Pk	28.5	-32.5	-95.2	-64.08	-13	-51.08	V
1.63754	42.16	Pk	28.5	-32.5	-95.2	-57.04	-13	-44.04	H
2.45575	34.07	Pk	32.5	-31.4	-95.2	-60.03	-13	-47.03	V
2.45778	41.52	Pk	32.5	-31.4	-95.2	-52.58	-13	-39.58	H
3.27629	40.72	Pk	32.9	-30.2	-95.2	-51.78	-13	-38.78	V
3.2781	40.53	Pk	32.9	-30.2	-95.2	-51.97	-13	-38.97	H

7.1.10. LTE BAND 30

LIMITS

FCC: §27.53 (a)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

Project #:	13171736
Date:	8/7/2020
Test Engineer:	19169
Configuration:	EUT only
Mode:	LTE30 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Mid Channel, 2310MHz									
4.6202	39.23	Pk	34.2	-26.8	-95.2	-48.57	-40	-8.57	H
4.62099	40.25	Pk	34.2	-26.8	-95.2	-47.55	-40	-7.55	V
6.931	36.85	Pk	36.3	-24.5	-95.2	-46.55	-40	-6.55	V
6.93179	38.34	Pk	36.3	-24.5	-95.2	-45.06	-40	-5.06	H
9.24136	35.75	Pk	36.4	-21.8	-95.2	-44.85	-40	-4.85	H
9.24182	35.54	Pk	36.4	-21.8	-95.2	-45.06	-40	-5.06	V

7.1.11. LTE BAND 41 AND 5G NR BAND n41

LIMITS

FCC: §27.53 (m)

At least 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	8/7/2020
Test Engineer:	39005
Configuration:	EUT Only
Mode:	LTE41FCC QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	PK Margin (dB)	Polarity
Low Channel, 2506MHz									
5.00627	36.65	Pk	33.7	-25.9	-95.2	-50.75	-25	-25.75	H
5.15779	36.36	Pk	33.8	-26.4	-95.2	-51.44	-25	-26.44	V
7.66688	35.07	Pk	36.9	-23.4	-95.2	-46.63	-25	-21.63	V
7.66831	36.21	Pk	36.9	-23.3	-95.2	-45.39	-25	-20.39	H
9.93217	33.78	Pk	38.4	-19.8	-95.2	-42.82	-25	-17.82	H
10.55277	33.38	Pk	39.5	-19.6	-95.2	-41.92	-25	-16.92	V
Mid Channel, 2593MHz									
4.80002	36.25	Pk	33	-27	-95.2	-52.95	-25	-27.95	H
5.09262	36.83	Pk	33.9	-26.3	-95.2	-50.77	-25	-25.77	V
7.69879	35.4	Pk	37.1	-23.2	-95.2	-45.9	-25	-20.9	V
7.77288	35.02	Pk	37.2	-23.4	-95.2	-46.38	-25	-21.38	H
10.38066	32.81	Pk	39.2	-19.3	-95.2	-42.49	-25	-17.49	H
10.55865	33.28	Pk	39.5	-19.5	-95.2	-41.92	-25	-16.92	V
High Channel, 2680MHz									
5.11968	37.4	Pk	33.9	-26.4	-95.2	-50.3	-25	-25.3	H
5.1487	34.8	Pk	33.8	-26.3	-95.2	-52.9	-25	-27.9	V
8.08516	36.21	Pk	37.2	-22.6	-95.2	-44.39	-25	-19.39	H
8.28894	33.91	Pk	37.5	-22.7	-95.2	-46.49	-25	-21.49	V
10.96109	33.59	Pk	39.4	-19.4	-95.2	-41.61	-25	-16.61	H
10.96699	33.64	Pk	39.4	-19.5	-95.2	-41.66	-25	-16.66	V

QPSK 5G NR BAND n41 (100.0MHZ BANDWIDTH)

Project #:	13171736
Date:	8/19/2020
Test Engineer:	50822
Configuration:	EUT only
Mode	5G NR n41 QPSK 100MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 2546MHz									
5.84283	36.57	Pk	33.6	-25.6	-95.2	-49.93	-25	-24.93	H
5.85328	37.14	Pk	33.7	-25.8	-95.2	-49.56	-25	-24.56	V
7.88503	34.81	Pk	37.3	-22.9	-95.2	-45.49	-25	-20.49	H
8.02712	35.34	Pk	37.1	-22.7	-95.2	-45.16	-25	-20.16	V
10.25183	33.46	Pk	38.8	-19.4	-95.2	-41.64	-25	-16.64	H
10.5066	34.24	Pk	39.5	-19.2	-95.2	-40.06	-25	-15.06	V
Mid Channel, 2593MHz									
5.77995	36.55	Pk	33.2	-25.2	-95.2	-50.05	-25	-25.05	V
5.81347	36.41	Pk	33.4	-25.5	-95.2	-49.99	-25	-24.99	H
7.97872	34.69	Pk	37.2	-22.9	-95.2	-45.91	-25	-20.91	H
8.17804	34.89	Pk	37.3	-22.9	-95.2	-45.61	-25	-20.61	V
10.56589	33.99	Pk	39.6	-19.4	-95.2	-40.21	-25	-15.21	H
10.75613	34.14	Pk	39.2	-19.4	-95.2	-40.36	-25	-15.36	V
High Channel, 2640MHz									
5.5698	36.24	Pk	33.2	-26.1	-95.2	-51.56	-25	-26.56	V
5.69093	36.06	Pk	33.1	-25.5	-95.2	-50.74	-25	-25.74	H
8.14701	35.48	Pk	37.3	-23	-95.2	-45.12	-25	-20.12	H
8.34636	35.06	Pk	37.5	-22.7	-95.2	-44.94	-25	-19.94	V
10.87133	33.82	Pk	39.3	-19.5	-95.2	-41.28	-25	-16.28	V
11.11309	33.67	Pk	39.2	-19.7	-95.2	-41.13	-25	-16.13	H

7.1.12. LTE BAND 66

LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	5/15/2020
Test Engineer:	50820
Configuration:	EUT only
Mode	LTE66 QPSK 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 1720MHz									
3.43989	30.86	Pk	30.4	-27.9	-95.2	-61.84	-13	-48.84	H
3.44017	30.63	Pk	30.4	-27.9	-95.2	-62.07	-13	-49.07	V
5.15854	30.3	Pk	33.8	-26.4	-95.2	-57.5	-13	-44.5	H
5.15939	30.37	Pk	33.8	-26.4	-95.2	-57.43	-13	-44.43	V
6.87875	29.58	Pk	36.3	-24.7	-95.2	-54.02	-13	-41.02	V
6.87923	28.62	Pk	36.3	-24.7	-95.2	-54.98	-13	-41.98	H
Mid Channel, 1745MHz									
3.49063	31.22	Pk	30.2	-27.7	-95.2	-61.48	-13	-48.48	H
3.49197	31.2	Pk	30.2	-27.7	-95.2	-61.5	-13	-48.5	V
5.23496	29.72	Pk	33.5	-26.6	-95.2	-58.58	-13	-45.58	V
5.23675	29.89	Pk	33.5	-26.6	-95.2	-58.41	-13	-45.41	H
6.98083	28.88	Pk	36.3	-24.4	-95.2	-54.42	-13	-41.42	H
6.98112	29.24	Pk	36.3	-24.4	-95.2	-54.06	-13	-41.06	V
High Channel, 1770MHz									
3.54041	31.46	Pk	30.2	-27.8	-95.2	-61.34	-13	-48.34	V
3.54109	32.25	Pk	30.2	-27.8	-95.2	-60.55	-13	-47.55	H
5.3103	29.67	Pk	33.3	-26.5	-95.2	-58.73	-13	-45.73	V
5.31233	29.39	Pk	33.2	-26.4	-95.2	-59.01	-13	-46.01	H
7.07962	28.22	Pk	36.6	-23.7	-95.2	-54.08	-13	-41.08	H
7.08217	28.49	Pk	36.7	-23.7	-95.2	-53.71	-13	-40.71	V

7.1.13. LTE BAND 71

LIMITS

FCC: §27.53 (g)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

QPSK LTE BAND 71 (20.0MHZ BANDWIDTH)

Project #:	13171736
Date:	6/16/2020
Test Engineer:	19140
Configuration:	EUT only
Mode	LTE77 QPSK 20MHz
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T348 (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	Harmonics limit	Margin (dB)	Polarity
Low Channel, 673MHz									
1.34585	40.78	Pk	25.3	-30.8	-95.2	-59.92	-13	-46.92	H
1.34738	40.8	Pk	25.3	-30.8	-95.2	-59.9	-13	-46.9	V
2.01996	39.4	Pk	27.2	-29.8	-95.2	-58.4	-13	-45.4	V
2.02025	39.74	Pk	27.2	-29.7	-95.2	-57.96	-13	-44.96	H
2.69084	38.77	Pk	29.2	-29	-95.2	-56.23	-13	-43.23	H
2.69125	39.31	Pk	29.2	-29	-95.2	-55.69	-13	-42.69	V
Mid Channel, 680.5MHz									
1.36251	41.44	Pk	25.3	-30.8	-95.2	-59.26	-13	-46.26	H
1.3629	42.66	Pk	25.4	-30.8	-95.2	-57.94	-13	-44.94	V
2.03951	40.48	Pk	27	-29.7	-95.2	-57.42	-13	-44.42	V
2.03958	39.74	Pk	27	-29.7	-95.2	-58.16	-13	-45.16	H
2.72022	39.28	Pk	29	-28.9	-95.2	-55.82	-13	-42.82	H
2.72323	38.87	Pk	29	-28.9	-95.2	-56.23	-13	-43.23	V
High Channel, 688MHz									
1.37398	41.45	Pk	25.4	-30.7	-95.2	-59.05	-13	-46.05	H
1.37473	44.03	Pk	25.4	-30.8	-95.2	-56.57	-13	-43.57	V
2.06327	40.17	Pk	27	-29.6	-95.2	-57.63	-13	-44.63	H
2.06591	38.98	Pk	27	-29.6	-95.2	-58.82	-13	-45.82	V
2.75007	38.68	Pk	29	-28.9	-95.2	-56.42	-13	-43.42	H
2.7515	38.64	Pk	29	-28.9	-95.2	-56.46	-13	-43.46	V

8. SETUP PHOTOS

Please refer to 13179116-EP1 for setup photos

End of the report