



TEST REPORT

Report Number. : 13336566-E7V2

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2406

FCC ID : BCG-E3546A

IC : 579C-E3546A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22H, 24E, 27L AND 90S
ISED RSS-132 ISSUE 3, RSS-133, ISSUE 6 AND RSS-139 ISSUE 3

Date Of Issue:
SEPTEMBER 20, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888





Revision History

Rev.	Issue Date	Revisions	Revised By
V1	9/17/2020	Initial Review	Mengistu Mekuria
V2	9/20/2020	Addressed TCB Questions	Mengistu Mekuria

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. SAMPLE CALCULATION	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. INTRODUCTION	7
5.3. MODEL DIFFERENCES	7
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY	8
5.5. REFERENCE DETAIL	8
5.6. SOFTWARE AND FIRMWARE	9
5.7. MAXIMUM ANTENNA GAIN	9
5.8. WORST-CASE CONFIGURATION AND MODE	9
5.9. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. RADIATED TEST RESULTS	13
7.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT2	13
7.1.1. GSM 850	13
7.1.2. GSM 1900	15
7.1.3. CDMA BC10	17
7.1.4. CDMA BC0	19
7.1.5. CDMA BC1	21
7.1.6. WCDMA BAND 5	23
7.1.7. WCDMA BAND 2	25
7.1.8. WCDMA BAND 4	27
8. SETUP PHOTOS	29

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A	
Model	A2406	
FCC ID	BCG-E3546A	
IC	579C-E3546A	
EUT Description	SMARTPHONE	
Serial Number	MODEL(A2406): C0702930086P55L5 (Conducted), G6TD200504RR (Radiated)	
Date Tested	APRIL 09, 2020 to AUGUST 27, 2020	
Applicable Standards	FCC CFR47 PART 22H, 24E, 27L, AND 90S ISED RSS-132 ISSUE 3, RSS-133 ISSUE 6, AND RSS-139 ISSUE 3	
Test Results	COMPLIES	
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Operations Leader UL Verification Services Inc.	Glenn Escano Project Engineer UL Verification Services Inc.	Lieu Nguyen Test Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27 and Part 90
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP
- ISSED RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 3.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Road
☐ Chamber A	☐ Chamber D	☐ Chamber I
☒ Chamber B	☐ Chamber E	☐ Chamber J
☐ Chamber C	☐ Chamber F	☐ Chamber K
	☐ Chamber G	☐ Chamber L
	☐ Chamber H	☐ Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID BCG-E3545A / IC ID 579C-E3545A to cover variant model FCC ID BCG-E3546A / IC ID 579C-E3546A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A2341 and A2406.

A2341 and A2406 are highly similar, with the only difference being the supported cellular bands.

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, NFC, WPT and UWB transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification and additional full radiated spurious emission test on ANT2 have been done on model A2406 in accordance with the test plan approved via KDB inquiry. Comparison of the models, upper deviation is within 3dB range and all tests are under FCC/ISED Technical Limits. The results documented for model A2341 may be applied as representative to model A2406.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY

A2406 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Channel	Measured	Original Model: A2341	Sub Model: A2406	Delta (dB)	Remarks
				Frequency MHz	FCC ID : BCG-E3545A IC ID : 579C-E3545A	FCC ID: BCG-E3546A IC ID : 579C-E3546A		
GSM	GPRS 850	ERP	Mid	836.6	26.35 dBm	25.94 dBm	-0.41	
	EGPRS 850	RSE	High	2546.38	-46.19 dBm	-52.07 dBm	-5.88	Noise Floor Level
	GPRS 1900	EIRP	High	1909.8	31.81 dBm	31.74 dBm	-0.07	
	EGPRS 1900	RSE	High	7625.38	-43.4 dBm	-43.07 dBm	0.33	Noise Floor Level
WCDMA	REL99 B5	ERP	Mid	836.6	18.55 dBm	18.55 dBm	0	
	REL99 B5	RSE	Low	2475.6	-50.29 dBm	-54.14 dBm	-3.85	Noise Floor Level
	REL99 B2	EIRP	High	1907.6	25.6dBm	25.6 dBm	0	
	REL99 B2	RSE	High	7649.38	-43.18 dBm	-43.26 dBm	-0.08	Noise Floor Level
	REL99 B4	EIRP	Low	1712.4	23.8 dBm	23.8 dBm	0	
	HSDPA B4	RSE	Mid	5198.28	-42.91 dBm	-47.74 dBm	-4.83	Noise Floor Level

5.5. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID / IC ID	Reference Application	Report Title/Section
PCE	BCG-E3545A 579C-E3545A	13259315-E7	FCC_IC 2G/3G Report / All Sections except Radiated spurious emission on ANT2

5.6. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.28.03-1.

5.7. MAXIMUM ANTENNA GAIN

Frequency Range (MHz)	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	ANT 4 Antenna Gain (dBi)
816 - 824	-5.0	-5.8	N/A	N/A
824 - 849	-5.0	-5.5	N/A	N/A
1850 - 1910	-2.1	-3.8	0.9	-1.5
1710 - 1755	-1.9	-3.5	-1.5	-3.2

5.8. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X/Y/Z on Ant1/Ant2 for GSM850, WCDMA Band 5, CDMA BC10, CDMA BC0, and CDMA BC1. And Ant1/ Ant2/ Ant3/ Ant4 for GSM1900, WCDMA Band 2 and WCDMA Band 4, it was determined that Y and X - orientation was the worst-case orientation for cell and secondary bands to ANT1 and ANT2 respectively. For PCS and AWS bands, Y- orientation to ANT1, Z- orientation to ANT2, ANT3, and X- orientation to ANT4 were the worst-case orientation without AC/DC adapter, headphones or laptop.

Based on average conducted output power measurement investigations. The worst-case is Ant. 1 with the highest power. Therefore, Ant. 1 was used to perform all conducted tests.

The worst-case scenario for all measurements as followed:

- GSM GPRS
- GSM EGPRS
- CDMA 2000 1xRTT
- CDMA 2000 1xEV-DO REV. A
- WCDMA REL 99
- WCDMA HSDPA

CDMA BC10 band is supported in USA only.


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GH WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


5.9. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	A1398	C02PM012G3QD		QDS-BRCM1069
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0	N/A

CONDUCTED SETUP

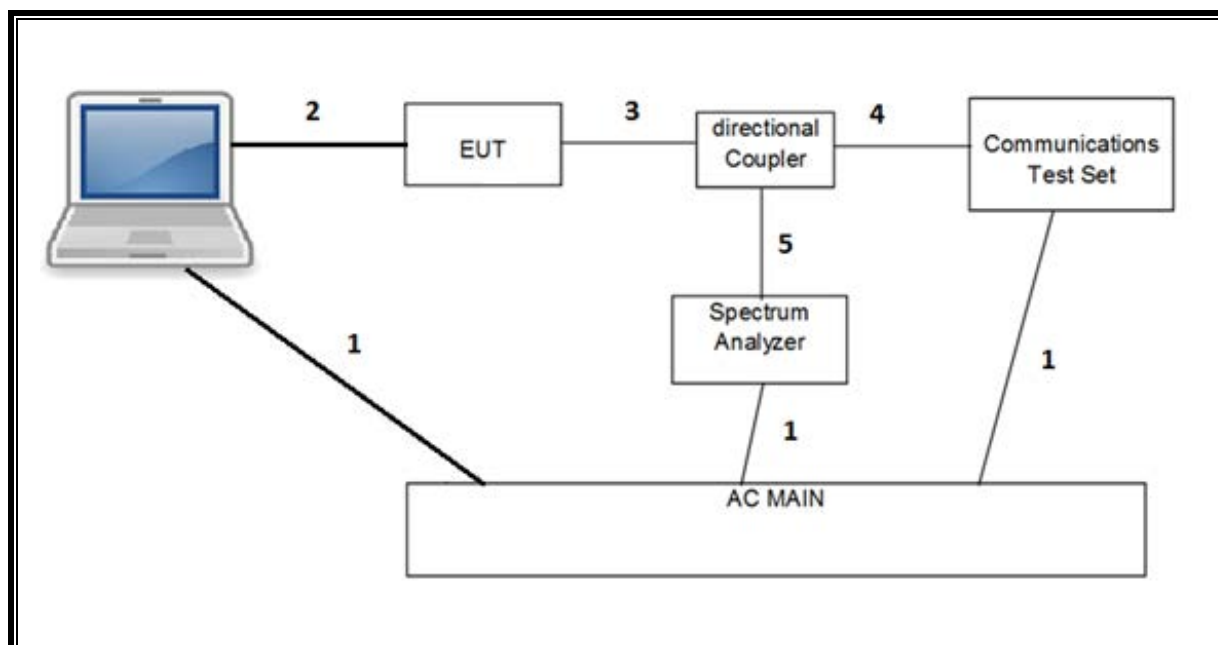

RADIATED SETUP

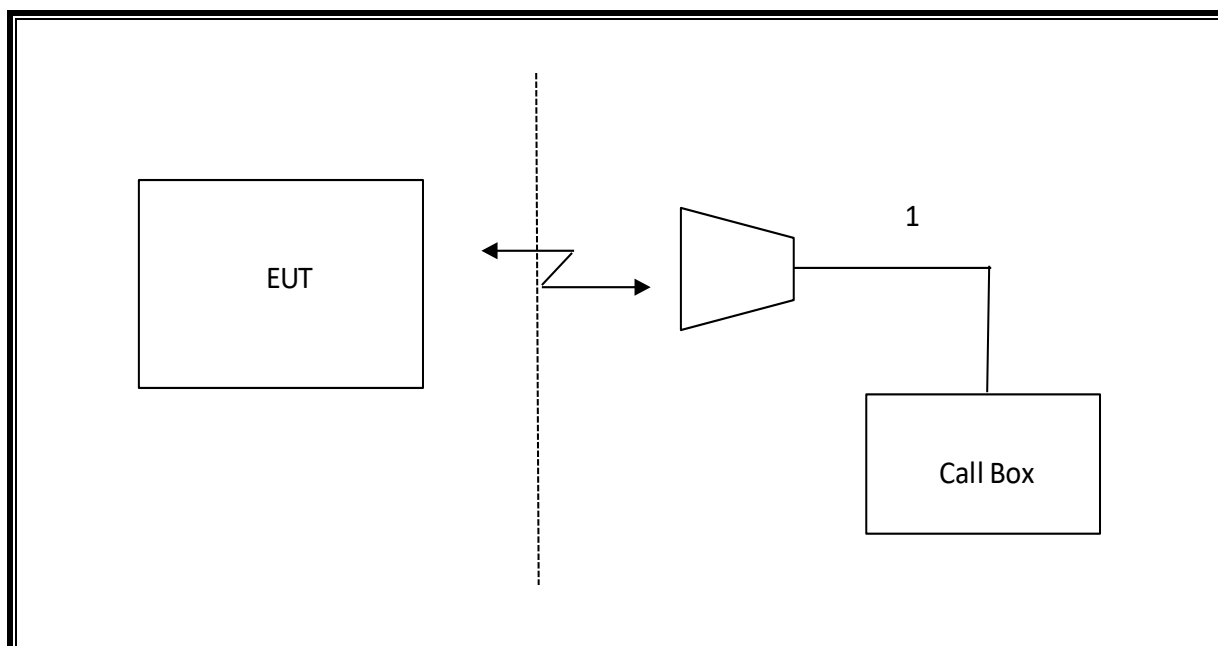

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	A.H. Systems, Inc.	SAS-571	T961	01/25/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	05/20/2021
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T931	05/11/2021
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	PRE0180176	07/14/2021
Filter, BRF 1850 – 1910 MHz	Micro-Tronics	BRM50714-02	T1796	06/23/2021
Filter, BRF 824 – 848 MHz	Micro-Tronics	BRM20025	PRE0191180	06/23/2021
*Directional Coupler	KRYTAR	152610	T1161	08/14/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	01/22/2021
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T907	01/22/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T260	02/19/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	02/19/2021
Power Meter, P-series single channel	Keysight	N1912A	T1245	01/22/2021
Power Sensor	Keysight	N1921A	T1225	02/23/2021
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017	
Power Measurement Software	UL	UL RF	Ver 2.7, 2019	
Radiated test software	UL	UL RF	Ver 9.5 June 15, 2019	

NOTES:

*Testing I completed before equipment calibration expiration data.

7. RADIATED TEST RESULTS

7.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT2

7.1.1. GSM 850

GPRS MODE

Project #:	13336566
Date:	8/3/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	GSM850 GPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.99008	41.26	Pk	27.4	-29.9	.6	-95.2	-55.84	-13	-42.84	H
2.45285	40.45	Pk	28.8	-29.4	.5	-95.2	-54.85	-13	-41.85	H
3.28795	39.29	Pk	31.2	-28	.8	-95.2	-51.91	-13	-38.91	H
1.98386	41.3	Pk	27.4	-29.9	.6	-95.2	-55.8	-13	-42.8	V
2.466	40.41	Pk	28.9	-29.4	.5	-95.2	-54.79	-13	-41.79	V
3.29054	39.07	Pk	31.2	-28	.8	-95.2	-52.13	-13	-39.13	V
Mid Channel, 836.6 MHz										
1.75826	40.99	Pk	25.6	-30.3	.7	-95.2	-58.21	-13	-45.21	H
2.8775	39.33	Pk	29.1	-28.6	.5	-95.2	-54.87	-13	-41.87	H
3.78543	38.77	Pk	30.8	-27.8	.6	-95.2	-52.83	-13	-39.83	H
1.76754	41.21	Pk	25.7	-30.3	.6	-95.2	-57.99	-13	-44.99	V
2.87193	39.83	Pk	29	-28.6	.5	-95.2	-54.47	-13	-41.47	V
3.89307	39.49	Pk	31.4	-27.6	.6	-95.2	-51.31	-13	-38.31	V
High Channel, 848.8 MHz										
1.47356	42.47	Pk	25	-30.6	.9	-95.2	-57.43	-13	-44.43	H
1.98539	41.13	Pk	27.4	-29.9	.6	-95.2	-55.97	-13	-42.97	H
3.05967	38.91	Pk	30.2	-28.4	.5	-95.2	-53.99	-13	-40.99	H
1.41154	41.73	Pk	25.4	-30.8	.9	-95.2	-57.97	-13	-44.97	V
1.98604	41.7	Pk	27.4	-29.9	.6	-95.2	-55.4	-13	-42.4	V
3.17154	39.75	Pk	31	-28.5	.5	-95.2	-52.45	-13	-39.45	V

Pk – Peak Detector

EGPRS MODE

Project #:	13336566
Date:	8/3/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	GSM850 EGPRS
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.997	40.91	Pk	27.4	-29.9	.5	-95.2	-56.29	-13	-43.29	H
2.51643	39.9	Pk	29.2	-29.2	.8	-95.2	-54.5	-13	-41.5	H
3.21677	38.81	Pk	31.3	-28.3	.5	-95.2	-52.89	-13	-39.89	H
1.98895	41.35	Pk	27.4	-29.9	.6	-95.2	-55.75	-13	-42.75	V
2.51243	40.42	Pk	29.1	-29.3	.7	-95.2	-54.28	-13	-41.28	V
3.22636	39.13	Pk	31.3	-28.3	.4	-95.2	-52.67	-13	-39.67	V
Mid Channel, 836.6 MHz										
1.98167	41.72	Pk	27.3	-29.9	.6	-95.2	-55.48	-13	-42.48	H
2.75165	39.68	Pk	29	-28.9	.6	-95.2	-54.82	-13	-41.82	H
3.33913	39.11	Pk	31.1	-28.2	.6	-95.2	-52.59	-13	-39.59	H
1.99656	41.21	Pk	27.4	-29.9	.5	-95.2	-55.99	-13	-42.99	V
2.74592	40.45	Pk	29	-28.9	.6	-95.2	-54.05	-13	-41.05	V
3.28667	39.27	Pk	31.2	-28	.8	-95.2	-51.93	-13	-38.93	V
High Channel, 848.8 MHz										
1.86457	41.13	Pk	26.1	-30	.6	-95.2	-57.37	-13	-44.37	H
2.57464	40.83	Pk	29.3	-29.1	.5	-95.2	-53.67	-13	-40.67	H
3.18309	39.13	Pk	31.1	-28.5	.6	-95.2	-52.87	-13	-39.87	H
1.87585	41.54	Pk	26.1	-30	.6	-95.2	-56.96	-13	-43.96	V
2.63675	40.26	Pk	29.2	-29	.6	-95.2	-54.14	-13	-41.14	V
3.2322	39.32	Pk	31.4	-28.3	.4	-95.2	-52.38	-13	-39.38	V

Pk – Peak Detector

7.1.2. GSM 1900

GPRS MODE

Project #:	13336566
Date:	8/3/2020
Test Engineer:	19410
Configuration:	EUT Only
Mode:	GPRS 1900
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.70016	41.68	Pk	30.3	-27.3	1	-95.2	-49.52	-13	-36.52	H
5.55082	42.62	Pk	33.3	-26	1	-95.2	-44.28	-13	-31.28	H
7.39905	36.15	Pk	36.9	-23.1	1	-95.2	-44.25	-13	-31.25	H
3.70041	39.63	Pk	30.3	-27.3	1	-95.2	-51.57	-13	-38.57	V
5.55162	38.02	Pk	33.3	-25.9	1	-95.2	-48.78	-13	-35.78	V
7.40228	35.82	Pk	36.9	-23.1	1	-95.2	-44.58	-13	-31.58	V
Mid Channel, 1880MHz										
3.7601	41.09	Pk	30.6	-27.5	1	-95.2	-50.01	-13	-37.01	H
5.64021	43.77	Pk	33.1	-24.8	1	-95.2	-42.13	-13	-29.13	H
7.52208	35.44	Pk	36.7	-23.1	1	-95.2	-45.16	-13	-32.16	H
3.76038	39.17	Pk	30.7	-27.5	1	-95.2	-51.83	-13	-38.83	V
5.63951	38.12	Pk	33.1	-24.8	1	-95.2	-47.78	-13	-34.78	V
7.52176	35.92	Pk	36.7	-23.1	1	-95.2	-44.68	-13	-31.68	V
High Channel, 1909.8MHz										
3.81803	39.2	Pk	30.9	-27.3	1	-95.2	-51.40	-13	-38.40	H
3.93745	45.06	Pk	31.5	-26.7	1	-95.2	-44.34	-13	-31.34	H
5.83125	37.34	Pk	33.5	-25.6	1	-95.2	-48.96	-13	-35.96	H
7.63999	36.16	Pk	37	-23.6	1	-95.2	-44.64	-13	-31.64	H
3.81963	39.44	Pk	30.9	-27.4	1	-95.2	-51.26	-13	-38.26	V
3.93763	43.61	Pk	31.5	-26.7	1	-95.2	-45.79	-13	-32.79	V
5.82929	37.95	Pk	33.5	-25.6	1	-95.2	-48.35	-13	-35.35	V
7.63805	35.69	Pk	36.9	-23.6	1	-95.2	-45.21	-13	-32.21	V

Pk – Peak Detector

EGPRS MODE

Project #:	13336566
Date:	8/6/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	EGPRS 1900
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.70114	38.22	Pk	30.3	-27.3	1	-95.2	-52.98	-13	-39.98	H
5.54995	36.59	Pk	33.2	-26	1	-95.2	-50.41	-13	-37.41	H
7.40131	35.8	Pk	36.9	-23.1	1	-95.2	-44.60	-13	-31.60	H
3.69895	38.57	Pk	30.3	-27.3	1	-95.2	-52.63	-13	-39.63	V
5.54962	37.29	Pk	33.2	-26	1	-95.2	-49.71	-13	-36.71	V
7.40273	35.48	Pk	36.9	-23.1	1	-95.2	-44.92	-13	-31.92	V
Mid Channel, 1880MHz										
3.75927	38.37	Pk	30.6	-27.5	1	-95.2	-52.73	-13	-39.73	H
5.63857	36.49	Pk	33.1	-24.8	1	-95.2	-49.41	-13	-36.41	H
7.52079	35.46	Pk	36.7	-23.1	1	-95.2	-45.14	-13	-32.14	H
3.76211	38.66	Pk	30.7	-27.5	1	-95.2	-52.34	-13	-39.34	V
5.63998	36.56	Pk	33.1	-24.8	1	-95.2	-49.34	-13	-36.34	V
7.52157	35.53	Pk	36.7	-23.1	1	-95.2	-45.07	-13	-32.07	V
High Channel, 1909.8MHz										
3.82115	38.43	Pk	31	-27.4	1	-95.2	-52.17	-13	-39.17	H
5.7293	36.39	Pk	33.1	-24.5	1	-95.2	-49.21	-13	-36.21	H
7.63973	36.91	Pk	37	-23.6	1	-95.2	-43.89	-13	-30.89	H
3.82055	38.89	Pk	30.9	-27.4	1	-95.2	-51.81	-13	-38.81	V
5.73038	35.74	Pk	33.1	-24.5	1	-95.2	-49.86	-13	-36.86	V
7.64013	35.67	Pk	37	-23.6	1	-95.2	-45.13	-13	-32.13	V

Pk – Peak Detector

7.1.3. CDMA BC10

1xRTT MODE

Project #:	13336566
Date:	8/12/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xRTT BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.6339	41.95	Pk	25	-30.5	.7	-95.2	-58.05	-13	-45.05	H
2.55874	40.23	Pk	29.2	-29.2	.5	-95.2	-54.47	-13	-41.47	H
3.20938	38.63	Pk	31.3	-28.4	.5	-95.2	-53.17	-13	-40.17	H
1.61986	40.86	Pk	24.9	-30.5	.7	-95.2	-59.24	-13	-46.24	V
2.44945	40.87	Pk	28.8	-29.4	.5	-95.2	-54.43	-13	-41.43	V
3.21036	39.22	Pk	31.3	-28.4	.5	-95.2	-52.58	-13	-39.58	V
Mid Channel, 820MHz										
1.6423	42.1	Pk	25	-30.4	.7	-95.2	-57.8	-13	-44.8	H
2.49804	40.01	Pk	29	-29.2	.6	-95.2	-54.79	-13	-41.79	H
3.2085	39.85	Pk	31.3	-28.4	.5	-95.2	-51.95	-13	-38.95	H
1.64024	40.65	Pk	25	-30.5	.7	-95.2	-59.35	-13	-46.35	V
2.49371	40.15	Pk	29	-29.3	.6	-95.2	-54.75	-13	-41.75	V
3.18144	38.18	Pk	31.1	-28.5	.5	-95.2	-53.92	-13	-40.92	V
High Channel, 822.75MHz										
1.919	39.6	Pk	26.3	-30	.6	-95.2	-58.7	-13	-45.7	H
2.67617	39.11	Pk	29.2	-28.9	.6	-95.2	-55.19	-13	-42.19	H
3.71822	38.66	Pk	30.4	-27.8	.6	-95.2	-53.34	-13	-40.34	H
1.86453	40.6	Pk	26.1	-30	.6	-95.2	-57.9	-13	-44.9	V
2.62003	39.83	Pk	29.2	-29.1	.6	-95.2	-54.67	-13	-41.67	V
3.72825	38.89	Pk	30.5	-27.8	.5	-95.2	-53.11	-13	-40.11	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13336566
Date:	8/13/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.86118	40.19	Pk	26	-30	.6	-95.2	-58.41	-13	-45.41	H
2.62058	39.96	Pk	29.2	-29.1	.6	-95.2	-54.54	-13	-41.54	H
3.37449	39.35	Pk	30.8	-28	.6	-95.2	-52.45	-13	-39.45	H
1.86407	40.39	Pk	26	-30	.6	-95.2	-58.21	-13	-45.21	V
2.61505	40.5	Pk	29.2	-29	.6	-95.2	-53.90	-13	-40.90	V
3.44385	38.18	Pk	30.4	-27.9	.5	-95.2	-54.02	-13	-41.02	V
Mid Channel, 820MHz										
2.02697	39.94	Pk	27.1	-29.7	.5	-95.2	-57.36	-13	-44.36	H
2.74191	39.06	Pk	29	-28.9	.6	-95.2	-55.44	-13	-42.44	H
3.26557	38.91	Pk	31.4	-28.2	.6	-95.2	-52.49	-13	-39.49	H
2.04488	40.28	Pk	27	-29.7	.6	-95.2	-57.02	-13	-44.02	V
2.7344	39.6	Pk	29	-28.9	.6	-95.2	-54.90	-13	-41.90	V
3.26638	39.09	Pk	31.4	-28.2	.6	-95.2	-52.31	-13	-39.31	V
High Channel, 822.75MHz										
1.96418	39.92	Pk	27	-30	.6	-95.2	-57.68	-13	-44.68	H
2.66895	39.23	Pk	29.2	-28.9	.6	-95.2	-55.07	-13	-42.07	H
3.20777	39.31	Pk	31.3	-28.4	.5	-95.2	-52.49	-13	-39.49	H
1.98368	40.6	Pk	27.4	-29.9	.6	-95.2	-56.50	-13	-43.50	V
2.67153	38.87	Pk	29.3	-28.9	.6	-95.2	-55.33	-13	-42.33	V
3.13702	39.25	Pk	30.8	-28.5	.6	-95.2	-53.05	-13	-40.05	V

Pk – Peak Detector

7.1.4. CDMA BC0

1xRTT MODE

Project #:	13336566
Date:	8/12/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xRTT BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.64742	46.19	Pk	24.9	-30.4	.8	-95.2	-53.71	-13	-40.71	H
2.62526	39.7	Pk	29.2	-29.1	.6	-95.2	-54.8	-13	-41.8	H
3.45249	45.18	Pk	30.5	-27.9	.5	-95.2	-46.92	-13	-33.92	H
1.63515	41.37	Pk	25	-30.5	.7	-95.2	-58.63	-13	-45.63	V
2.60602	39.5	Pk	29.2	-29.1	.5	-95.2	-55.10	-13	-42.10	V
3.50325	38.91	Pk	30.2	-27.7	.8	-95.2	-52.99	-13	-39.99	V
Mid Channel, 836.52MHz										
1.67558	40.88	Pk	25	-30.4	.7	-95.2	-59.02	-13	-46.02	H
2.38673	40.41	Pk	28.4	-29.5	.6	-95.2	-55.29	-13	-42.29	H
3.19482	39.14	Pk	31.2	-28.5	.6	-95.2	-52.76	-13	-39.76	H
1.67253	40.99	Pk	25	-30.4	.7	-95.2	-58.91	-13	-45.91	V
2.38658	40.29	Pk	28.4	-29.5	.6	-95.2	-55.41	-13	-42.41	V
3.08715	39.93	Pk	30.4	-28.5	.6	-95.2	-52.77	-13	-39.77	V
High Channel, 848.31MHz										
1.8627	40.77	Pk	26	-30	.6	-95.2	-57.83	-13	-44.83	H
2.6113	40.64	Pk	29.2	-29	.5	-95.2	-53.86	-13	-40.86	H
3.4855	38.39	Pk	30.2	-27.8	.8	-95.2	-53.61	-13	-40.61	H
1.85719	40.02	Pk	26	-30.1	.6	-95.2	-58.68	-13	-45.68	V
2.61658	40.17	Pk	29.2	-29.1	.6	-95.2	-54.33	-13	-41.33	V
3.49182	38.23	Pk	30.2	-27.7	.9	-95.2	-53.57	-13	-40.57	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13336566
Date:	8/13/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.81145	40.84	Pk	25.9	-30.2	.6	-95.2	-58.06	-13	-45.06	H
2.44597	40.48	Pk	28.8	-29.4	.5	-95.2	-54.82	-13	-41.82	H
3.20068	39.38	Pk	31.2	-28.5	.6	-95.2	-52.52	-13	-39.52	H
1.80881	41.35	Pk	25.9	-30.2	.6	-95.2	-57.55	-13	-44.55	V
2.44109	40.28	Pk	28.8	-29.4	.5	-95.2	-55.02	-13	-42.02	V
3.22755	37.43	Pk	31.3	-28.3	.4	-95.2	-54.37	-13	-41.37	V
Mid Channel, 836.52MHz										
1.98854	39.77	Pk	27.4	-29.9	.6	-95.2	-57.33	-13	-44.33	H
2.62068	39.91	Pk	29.2	-29.1	.6	-95.2	-54.59	-13	-41.59	H
3.25651	38.93	Pk	31.3	-28.3	.4	-95.2	-52.87	-13	-39.87	H
2.03777	39.58	Pk	27	-29.7	.6	-95.2	-57.72	-13	-44.72	V
2.62088	40.31	Pk	29.2	-29.1	.6	-95.2	-54.19	-13	-41.19	V
3.19771	39.13	Pk	31.2	-28.5	.6	-95.2	-52.77	-13	-39.77	V
High Channel, 848.31MHz										
1.97453	40.07	Pk	27.2	-29.9	.6	-95.2	-57.23	-13	-44.23	H
2.49531	39.75	Pk	29	-29.3	.6	-95.2	-55.15	-13	-42.15	H
3.26082	39.32	Pk	31.3	-28.3	.5	-95.2	-52.38	-13	-39.38	H
1.99355	40.75	Pk	27.4	-29.9	.5	-95.2	-56.45	-13	-43.45	V
2.43606	40.01	Pk	28.7	-29.4	.5	-95.2	-55.39	-13	-42.39	V
3.25666	39.18	Pk	31.3	-28.3	.5	-95.2	-52.52	-13	-39.52	V

Pk – Peak Detector

7.1.5. CDMA BC1

1xRTT MODE

Project #:	13336566
Date:	8/12/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xRTT BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
4.2383	37.81	Pk	31.8	-25.8	1	-95.2	-50.39	-13	-37.39	H
5.04914	37.37	Pk	33.8	-24.7	1	-95.2	-47.73	-13	-34.73	H
7.26302	36.07	Pk	37.1	-23.1	1	-95.2	-44.13	-13	-31.13	H
4.25093	38.02	Pk	31.8	-25.9	1	-95.2	-50.28	-13	-37.28	V
5.08106	37.23	Pk	33.8	-24.9	1	-95.2	-48.07	-13	-35.07	V
7.26016	36.19	Pk	37.1	-23.1	1	-95.2	-44.01	-13	-31.01	V
Mid Channel, 1880MHz										
3.94755	37.99	Pk	31.6	-26.7	1	-95.2	-51.31	-13	-38.31	H
5.17403	37.6	Pk	33.7	-25.4	1	-95.2	-48.3	-13	-35.3	H
7.07306	35.75	Pk	36.6	-23.5	1	-95.2	-45.35	-13	-32.35	H
3.99727	37.5	Pk	31.5	-27.1	1	-95.2	-52.3	-13	-39.3	V
5.27671	37.86	Pk	33.4	-26.1	1	-95.2	-49.04	-13	-36.04	V
7.29733	35.69	Pk	37	-23.4	1	-95.2	-44.91	-13	-31.91	V
High Channel, 1908.75MHz										
3.91423	38.55	Pk	31.5	-26.8	1	-95.2	-50.95	-13	-37.95	H
5.07353	36.77	Pk	33.8	-24.9	1	-95.2	-48.53	-13	-35.53	H
6.67937	36.33	Pk	35.7	-24.5	1	-95.2	-46.67	-13	-33.67	H
3.8469	38.76	Pk	31.2	-27.2	1	-95.2	-51.44	-13	-38.44	V
5.07918	36.98	Pk	33.8	-24.8	1	-95.2	-48.22	-13	-35.22	V
6.6188	35.5	Pk	35.6	-23.9	1	-95.2	-47.00	-13	-34.00	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13336566
Date:	8/12/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
3.9204	38.48	Pk	31.5	-26.8	1	-95.2	-51.02	-13	-38.02	H
5.06039	36.85	Pk	33.8	-24.7	1	-95.2	-48.25	-13	-35.25	H
7.20281	35.72	Pk	37.1	-22.8	1	-95.2	-44.18	-13	-31.18	H
3.87197	39.09	Pk	31.2	-27	1	-95.2	-50.91	-13	-37.91	V
5.12278	37.86	Pk	33.9	-24.8	1	-95.2	-47.24	-13	-34.24	V
7.16191	35.79	Pk	36.9	-22.7	1	-95.2	-44.21	-13	-31.21	V
Mid Channel, 1880MHz										
4.23481	37.51	Pk	31.8	-25.8	1	-95.2	-50.69	-13	-37.69	H
5.05481	37.97	Pk	33.8	-24.8	1	-95.2	-47.23	-13	-34.23	H
7.29077	35.95	Pk	37.1	-23.3	1	-95.2	-44.45	-13	-31.45	H
4.28608	38.74	Pk	31.8	-26.5	1	-95.2	-50.16	-13	-37.16	V
5.06156	38	Pk	33.9	-24.8	1	-95.2	-47.10	-13	-34.10	V
7.40424	36.14	Pk	36.9	-23.1	1	-95.2	-44.26	-13	-31.26	V
High Channel, 1908.75MHz										
4.18369	37.46	Pk	31.7	-25.8	1	-95.2	-50.84	-13	-37.84	H
4.99733	38.28	Pk	33.6	-25.7	1	-95.2	-48.02	-13	-35.02	H
7.21364	35.4	Pk	37.2	-22.6	1	-95.2	-44.20	-13	-31.20	H
4.20294	37.98	Pk	31.7	-25.7	1	-95.2	-50.22	-13	-37.22	V
4.99793	38.06	Pk	33.6	-25.7	1	-95.2	-48.24	-13	-35.24	V
7.3168	36.78	Pk	37	-23.7	1	-95.2	-44.12	-13	-31.12	V

Pk – Peak Detector

7.1.6. WCDMA BAND 5

REL 99 MODE

Project #:	13336566
Date:	8/11/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	Rel 99 Band 5
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.75836	40.55	Pk	25.6	-30.3	.7	-95.2	-58.65	-13	-45.65	H
2.61041	39.94	Pk	29.2	-29	.5	-95.2	-54.56	-13	-41.56	H
3.49639	39.13	Pk	30.2	-27.7	.9	-95.2	-52.67	-13	-39.67	H
1.76301	40	Pk	25.7	-30.3	.7	-95.2	-59.1	-13	-46.1	V
2.61348	40.13	Pk	29.2	-29	.6	-95.2	-54.27	-13	-41.27	V
3.49922	37.93	Pk	30.1	-27.7	.9	-95.2	-53.97	-13	-40.97	V
Mid Channel, 836.6MHz										
1.97908	41.38	Pk	27.3	-29.9	.6	-95.2	-55.82	-13	-42.82	H
2.61645	40.35	Pk	29.2	-29.1	.6	-95.2	-54.15	-13	-41.15	H
3.19594	39.38	Pk	31.2	-28.5	.6	-95.2	-52.52	-13	-39.52	H
1.96425	40.02	Pk	27	-30	.6	-95.2	-57.58	-13	-44.58	V
2.6262	39.6	Pk	29.2	-29.1	.6	-95.2	-54.9	-13	-41.9	V
3.1965	39.23	Pk	31.2	-28.5	.6	-95.2	-52.67	-13	-39.67	V
High Channel, 846.6MHz										
1.98758	40.22	Pk	27.4	-29.9	.6	-95.2	-56.88	-13	-43.88	H
2.68515	39.39	Pk	29.2	-28.9	.6	-95.2	-54.91	-13	-41.91	H
3.38566	38.5	Pk	30.8	-28.1	.6	-95.2	-53.4	-13	-40.4	H
1.97913	40.45	Pk	27.3	-29.9	.6	-95.2	-56.75	-13	-43.75	V
2.67728	39.02	Pk	29.2	-28.9	.6	-95.2	-55.28	-13	-42.28	V
3.3714	38.43	Pk	30.9	-28	.6	-95.2	-53.27	-13	-40.27	V

Pk – Peak Detector

HSDPA MODE

Project #:	13336566
Date:	8/11/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 5
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.70017	40.23	Pk	25.1	-30.4	.7	-95.2	-59.57	-13	-46.57	H
2.55262	39.67	Pk	29.3	-29.2	.6	-95.2	-54.83	-13	-41.83	H
3.25381	39.26	Pk	31.3	-28.3	.4	-95.2	-52.54	-13	-39.54	H
1.70505	40.8	Pk	25.1	-30.3	.6	-95.2	-59	-13	-46	V
2.50871	39.78	Pk	29.1	-29.3	.7	-95.2	-54.92	-13	-41.92	V
3.26651	39.77	Pk	31.4	-28.2	.6	-95.2	-51.63	-13	-38.63	V
Mid Channel, 836.6MHz										
1.7965	40.4	Pk	25.9	-30.2	.6	-95.2	-58.5	-13	-45.5	H
2.47501	38.74	Pk	29	-29.3	.5	-95.2	-56.26	-13	-43.26	H
3.30554	38.16	Pk	31.1	-27.9	.7	-95.2	-53.14	-13	-40.14	H
1.80513	40.07	Pk	25.9	-30.2	.6	-95.2	-58.83	-13	-45.83	V
2.44461	39.76	Pk	28.8	-29.4	.5	-95.2	-55.54	-13	-42.54	V
3.26653	39.2	Pk	31.4	-28.2	.6	-95.2	-52.2	-13	-39.2	V
High Channel, 846.6MHz										
1.8468	40.79	Pk	26	-30	.5	-95.2	-57.91	-13	-44.91	H
2.67244	39.46	Pk	29.3	-28.9	.6	-95.2	-54.74	-13	-41.74	H
3.25321	38.51	Pk	31.3	-28.3	.4	-95.2	-53.29	-13	-40.29	H
1.85784	40.64	Pk	26	-30.1	.6	-95.2	-58.06	-13	-45.06	V
2.72281	38.77	Pk	29	-28.9	.5	-95.2	-55.83	-13	-42.83	V
3.24521	38.29	Pk	31.3	-28.3	.4	-95.2	-53.51	-13	-40.51	V

Pk – Peak Detector

7.1.7. WCDMA BAND 2

REL 99 MODE

Project #:	13336566
Date:	8/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.91935	38.66	Pk	31.5	-26.8	1	-95.2	-50.84	-13	-37.84	H
5.07061	37.34	Pk	33.8	-24.9	1	-95.2	-47.96	-13	-34.96	H
7.27238	36.23	Pk	37.2	-23.2	1	-95.2	-43.97	-13	-30.97	H
3.95004	37.92	Pk	31.6	-26.7	1	-95.2	-51.38	-13	-38.38	V
4.98078	37.73	Pk	33.6	-25.8	1	-95.2	-48.67	-13	-35.67	V
7.26033	36.11	Pk	37.1	-23.1	1	-95.2	-44.09	-13	-31.09	V
Mid Channel, 1880MHz										
3.92413	38.65	Pk	31.4	-26.7	1	-95.2	-50.85	-13	-37.85	H
5.04976	37.56	Pk	33.8	-24.7	1	-95.2	-47.54	-13	-34.54	H
7.25375	36.02	Pk	37.2	-23.1	1	-95.2	-44.08	-13	-31.08	H
3.90974	39.07	Pk	31.4	-26.8	1	-95.2	-50.53	-13	-37.53	V
5.12454	37.04	Pk	33.9	-24.8	1	-95.2	-48.06	-13	-35.06	V
7.23809	35.74	Pk	37.2	-22.8	1	-95.2	-44.06	-13	-31.06	V
High Channel, 1907.6MHz										
3.83725	38.68	Pk	31	-27.2	1	-95.2	-51.72	-13	-38.72	H
5.18561	37.87	Pk	33.6	-25.7	1	-95.2	-48.43	-13	-35.43	H
7.16216	35.69	Pk	36.9	-22.7	1	-95.2	-44.31	-13	-31.31	H
3.87631	38.36	Pk	31.4	-27.1	1	-95.2	-51.54	-13	-38.54	V
5.00108	37.5	Pk	33.6	-25.8	1	-95.2	-48.9	-13	-35.9	V
7.11428	35.55	Pk	36.7	-22.7	1	-95.2	-44.65	-13	-31.65	V

Pk – Peak Detector

HSDPA MODE

Project #:	13336566
Date:	8/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
4.21423	37.99	Pk	31.7	-25.7	1	-95.2	-50.21	-13	-37.21	H
5.10211	37.27	Pk	34	-24.6	1	-95.2	-47.53	-13	-34.53	H
7.16195	35.68	Pk	36.9	-22.7	1	-95.2	-44.32	-13	-31.32	H
4.22374	37.99	Pk	31.8	-25.7	1	-95.2	-50.11	-13	-37.11	V
5.05895	38.6	Pk	33.8	-24.7	1	-95.2	-46.5	-13	-33.5	V
7.10481	36.31	Pk	36.7	-22.7	1	-95.2	-43.89	-13	-30.89	V
Mid Channel, 1880MHz										
3.87125	38.65	Pk	31.2	-27	1	-95.2	-51.35	-13	-38.35	H
5.11427	37.58	Pk	33.9	-24.6	1	-95.2	-47.32	-13	-34.32	H
7.14157	36.2	Pk	36.9	-22.8	1	-95.2	-43.9	-13	-30.9	H
3.91386	38.74	Pk	31.5	-26.8	1	-95.2	-50.76	-13	-37.76	V
5.06051	37.09	Pk	33.8	-24.7	1	-95.2	-48.01	-13	-35.01	V
7.07844	36.1	Pk	36.6	-23.3	1	-95.2	-44.8	-13	-31.8	V
High Channel, 1907.6MHz										
3.6155	38.78	Pk	30.1	-27.2	1	-95.2	-52.52	-13	-39.52	H
4.98879	38.37	Pk	33.6	-25.8	1	-95.2	-48.03	-13	-35.03	H
7.23336	36	Pk	37.2	-22.7	1	-95.2	-43.7	-13	-30.7	H
3.60937	38.49	Pk	30	-27.1	1	-95.2	-52.81	-13	-39.81	V
4.85541	37.47	Pk	33.1	-26.1	1	-95.2	-49.73	-13	-36.73	V
7.22656	35.76	Pk	37.1	-22.6	1	-95.2	-43.94	-13	-30.94	V

Pk – Peak Detector

7.1.8. WCDMA BAND 4

REL 99 MODE

Project #:	13336566
Date:	8/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.86729	39.88	Pk	31.2	-27.1	1	-95.2	-50.22	-13	-37.22	H
4.98921	37.79	Pk	33.6	-25.8	1	-95.2	-48.61	-13	-35.61	H
7.73194	35.02	Pk	37.1	-21.8	1	-95.2	-43.88	-13	-30.88	H
3.82076	39.21	Pk	30.9	-27.4	1	-95.2	-51.49	-13	-38.49	V
5.06079	38.49	Pk	33.8	-24.7	1	-95.2	-46.61	-13	-33.61	V
7.72456	36.15	Pk	37.1	-21.9	1	-95.2	-42.85	-13	-29.85	V
Mid Channel, 1732.6MHz										
4.12874	38.06	Pk	31.7	-26.6	1	-95.2	-51.04	-13	-38.04	H
5.16768	38.24	Pk	33.7	-25.4	1	-95.2	-47.66	-13	-34.66	H
7.17574	35.52	Pk	37.1	-22.8	1	-95.2	-44.38	-13	-31.38	H
4.19814	37.64	Pk	31.7	-25.8	1	-95.2	-50.66	-13	-37.66	V
5.10012	37.3	Pk	33.9	-24.7	1	-95.2	-47.7	-13	-34.7	V
7.07923	36.27	Pk	36.6	-23.3	1	-95.2	-44.63	-13	-31.63	V
High Channel, 1752.6MHz										
3.74555	39.43	Pk	30.6	-27.5	1	-95.2	-51.67	-13	-38.67	H
5.15445	37.66	Pk	33.8	-25.3	1	-95.2	-48.04	-13	-35.04	H
7.25414	35.84	Pk	37.2	-23.1	1	-95.2	-44.26	-13	-31.26	H
3.80213	39	Pk	30.9	-27.4	1	-95.2	-51.7	-13	-38.7	V
5.06352	37.26	Pk	33.9	-24.8	1	-95.2	-47.84	-13	-34.84	V
7.24975	36.07	Pk	37.2	-23	1	-95.2	-43.93	-13	-30.93	V

Pk – Peak Detector

HSDPA MODE

Project #:	13336566
Date:	8/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
4.232	37.62	Pk	31.8	-25.7	1	-95.2	-50.48	-13	-37.48	H
5.18144	37.84	Pk	33.6	-25.6	1	-95.2	-48.36	-13	-35.36	H
6.74595	37.2	Pk	35.9	-24.6	1	-95.2	-45.7	-13	-32.7	H
4.24012	37.79	Pk	31.8	-25.8	1	-95.2	-50.41	-13	-37.41	V
5.1262	37.77	Pk	33.8	-24.8	1	-95.2	-47.43	-13	-34.43	V
6.91926	35.61	Pk	36.3	-23.3	1	-95.2	-45.59	-13	-32.59	V
Mid Channel, 1732.6MHz										
4.13887	38.14	Pk	31.9	-26.4	1	-95.2	-50.56	-13	-37.56	H
5.11824	37.56	Pk	33.9	-24.7	1	-95.2	-47.44	-13	-34.44	H
7.26973	36.31	Pk	37.2	-23.1	1	-95.2	-43.79	-13	-30.79	H
4.2328	37.46	Pk	31.8	-25.7	1	-95.2	-50.64	-13	-37.64	V
5.1964	38.45	Pk	33.7	-25.9	1	-95.2	-47.95	-13	-34.95	V
7.09972	36.06	Pk	36.7	-22.8	1	-95.2	-44.24	-13	-31.24	V
High Channel, 1752.6MHz										
3.93548	37.41	Pk	31.6	-26.7	1	-95.2	-51.89	-13	-38.89	H
5.11476	37.07	Pk	33.9	-24.6	1	-95.2	-47.83	-13	-34.83	H
6.69053	36.83	Pk	35.8	-24.5	1	-95.2	-46.07	-13	-33.07	H
3.91066	38.46	Pk	31.4	-26.8	1	-95.2	-51.14	-13	-38.14	V
5.0748	36.91	Pk	33.8	-24.9	1	-95.2	-48.39	-13	-35.39	V
6.69666	36.47	Pk	35.8	-24.5	1	-95.2	-46.43	-13	-33.43	V

Pk – Peak Detector

8. SETUP PHOTOS

Please refer to 13259315-EP1 for setup photos

Appendix A – Reference Test Report 13259315-E7

Attached is the test report (13259315-E7) containing the reference data from the parent model as detailed in section 5.5.



TEST REPORT

Report Number : 13259315-E7V2

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2341

FCC ID : BCG-E3545A

IC : 579C-E3545A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22H, 24E, 27L AND 90S
ISED RSS-132 ISSUE 3, RSS-133 ISSUE 6 AND RSS-139 ISSUE 3

Date Of Issue:
SEPTEMBER 17, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	9/15/2020	Initial Review	Mengistu Mekuria
V2	9/17/2020	Addressed TCB Questions	Mengistu Mekuria



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
4.1. METROLOGICAL TRACEABILITY	8
4.2. DECISION RULES	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. SAMPLE CALCULATION	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. SOFTWARE AND FIRMWARE	12
5.4. MAXIMUM ANTENNA GAIN	12
5.5. WORST-CASE CONFIGURATION AND MODE	12
5.6. DESCRIPTION OF TEST SETUP	13
6. TEST AND MEASUREMENT EQUIPMENT	15
7. RF OUTPUT POWER VERIFICATION	16
7.1. GSM	16
7.1.1. GSM 850	17
7.1.2. GSM 1900	17
7.2. CDMA	18
7.2.1. CDMA BC10	20
7.2.2. CDMA BC0	21
7.2.3. CDMA BC1	22
7.3. WCDMA	23
7.3.1. WCDMA BAND 5	25
7.3.2. WCDMA BAND 2	26
7.3.3. WCDMA BAND 4	27
8. CONDUCTED TEST RESULTS	28
8.1. OCCUPIED BANDWIDTH	28
8.1.1. GSM	30
8.1.2. CDMA	31
8.1.3. WCDMA	32
8.2. BAND EDGE AND EMISSION MASK	33
8.2.1. GSM 850	35
8.2.2. GSM 1900	36

8.2.3.	CDMA BC10.....	37
8.2.4.	CDMA BC0.....	38
8.2.5.	CDMA BC1.....	39
8.2.6.	WCDMA BAND 5	40
8.2.7.	WCDMA BAND 2	41
8.2.8.	WCDMA BAND 4	42
8.3.	<i>OUT OF BAND EMISSIONS</i>	43
8.3.1.	GSM 850	44
8.3.2.	GSM 1900	45
8.3.3.	CDMA BC10.....	46
8.3.4.	CDMA BC0.....	47
8.3.5.	CDMA BC1.....	48
8.3.6.	WCDMA BAND 5	49
8.3.7.	WCDMA BAND 2	50
8.3.8.	WCDMA BAND 4	51
8.4.	<i>FREQUENCY STABILITY</i>	52
8.4.1.	GSM.....	53
8.4.2.	CDMA	54
8.4.3.	WCDMA	56
8.5.	<i>PEAK-TO-AVERAGE POWER RATIO</i>	58
8.5.1.	GSM.....	59
8.5.2.	CDMA	60
8.5.3.	WCDMA	61
9.	RADIATED TEST RESULTS	62
9.1.	<i>Example Plot</i>	63
9.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION, ANT1</i>	65
9.2.1.	GSM 850	66
9.2.2.	GSM 1900	68
9.2.3.	CDMA BC10.....	70
9.2.4.	CDMA BC0.....	72
9.2.5.	CDMA BC1.....	74
9.2.6.	WCDMA BAND 5	76
9.2.7.	WCDMA BAND 2	78
9.2.8.	WCDMA BAND 4	80
9.3.	<i>FIELD STRENGTH OF SPURIOUS RADIATION, ANT2</i>	82
9.3.1.	GSM 850	82
9.3.2.	GSM 1900	84
9.3.3.	CDMA BC10.....	86
9.3.4.	CDMA BC0.....	88
9.3.5.	CDMA BC1.....	90
9.3.6.	WCDMA BAND 5	92
9.3.7.	WCDMA BAND 2	94
9.3.8.	WCDMA BAND 4	96
9.4.	<i>FIELD STRENGTH OF SPURIOUS RADIATION, ANT3</i>	98
9.4.1.	GSM 1900	98
9.4.2.	WCDMA BAND 2	100
9.4.3.	WCDMA BAND 4	102

9.5.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT4	104
9.5.1.	GSM 1900	104
9.5.2.	WCDMA BAND 2	106
9.5.3.	WCDMA BAND 4	108
10.	SETUP PHOTOS.....	110

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A	
Model	A2341	
FCC ID	BCG-E3545A	
IC	579C-E3545A	
EUT Description	SMARTPHONE	
Serial Number	MODEL(A2341): G6TC404MPT9X (Conducted), C07018700UUP55J4 (Radiated)	
Date Tested	APRIL 09, 2020 to AUGUST 25, 2020	
Applicable Standards	FCC CFR47 PART 22H, 24E, 27L, AND 90S ISED RSS-132 ISSUE 3, RSS-133 ISSUE 6, AND RSS-139 ISSUE 3	
Test Results	COMPLIES	
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Operations Leader UL Verification Services Inc.	Glenn Escano Project Engineer UL Verification Services Inc.	Lieu Nguyen Laboratory Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27 and Part 90
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP
- ISED RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 3.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Road
☒ Chamber A	☐ Chamber D	☐ Chamber I
☒ Chamber B	☐ Chamber E	☐ Chamber J
☐ Chamber C	☐ Chamber F	☐ Chamber K
	☐ Chamber G	☐ Chamber L
	☐ Chamber H	☐ Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers as follows:

GSM MODES

RSS 132 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.50	-5.00	11.5	28.50	0.708	244.9125	245KGXW
	EGPRS	27.63			22.63	0.183	246.0786	246KG7W
Part 22 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.50	-5.00	7.0	26.35	0.432	244.9125	245KGXW
	EGPRS	27.63			20.48	0.112	246.0786	246KG7W
Part 24 / RSS 133 1900MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1850.2-1909.8	GPRS	30.91	0.90	2.0	31.81	1.517	242.6955	243KGXW
	EGPRS	25.74			26.64	0.461	233.52	234KG7W

CDMA MODES

Part 90 BC10								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Limit (W)	Conducted (Average) (W)		99% BW (kHz)	Emission Designator	
817.25-822.75	1xRTT	25.6	100.0	0.363		1278.7	1M28F9W	
	1xEV-DO Rev A	25.6		0.363		1281.8	1M28F9W	
RSS 132 BC0								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.7-848.31	1xRTT	25.7	-5.00	11.5	20.70	0.117	1276.6	1M28F9W
	1xEV-DO Rev A	25.7			20.70	0.117	1277.5	1M28F9W
Part 22 BC0								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.7-848.31	1xRTT	25.7	-5.00	7.0	18.55	0.072	1276.6	1M28F9W
	1xEV-DO Rev A	25.7			18.55	0.072	1277.5	1M28F9W
Part 24 / RSS 133 BC1								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1851.25-1908.75	1xRTT	25.6	-2.10	2.0	23.50	0.224	1277.8	1M28F9W
	1xEV-DO Rev A	25.6			23.50	0.224	1279.1	1M28F9W

WCDMA MODE

RSS 132 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	25.7	-5.00	11.5	20.70	0.117	4123.9	4M12F9W
	HSDPA	24.8			19.80	0.095	4126.7	4M13F9W
Part 22 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	25.7	-5.00	7.0	18.55	0.072	4123.9	4M12F9W
	HSDPA	24.8			17.65	0.058	4126.7	4M13F9W
Part 24 / RSS 133 Band 2								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1852.4-1907.6	REL 99	24.7	0.90	2.0	25.60	0.363	4146.9	4M15F9W
	HSDPA	23.8			24.70	0.295	4125.3	4M13F9W
Part 27 / RSS 139 Band 4								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1712.4-1752.6	REL 99	25.7	-1.90	1.0	23.80	0.240	4134.6	4M13F9W
	HSDPA	24.7			22.80	0.191	4131.6	4M13F9W

5.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.28.03-1.

5.4. MAXIMUM ANTENNA GAIN

Frequency Range (MHz)	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	ANT 4 Antenna Gain (dBi)
816 - 824	-5.0	-6.5	N/A	N/A
824 - 849	-5.0	-6.4	N/A	N/A
1850 - 1910	-2.1	-3.9	0.9	-1.5
1710 - 1755	-1.9	-3.9	-1.5	-2.7

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X/Y/Z on Ant1/Ant2 for GSM850, WCDMA Band 5, CDMA BC10, CDMA BC0, and CDMA BC1. And Ant1/ Ant2/ Ant3/ Ant4 for GSM1900, WCDMA Band 2 and WCDMA Band 4, it was determined that Y and X - orientation was the worst-case orientation for cell and secondary bands to ANT1 and ANT2 respectively. For PCS and AWS bands, Y- orientation to ANT1, Z- orientation to ANT2, ANT3, and - orientation to ANT4 were the worst-case orientation without AC/DC adapter, headphones or laptop.

Based on average conducted output power measurement investigations. The worst-case is Ant. 1 with the highest power. Therefore, Ant. 1 was used to perform all conducted tests.

The worst-case scenario for all measurements as followed:

- GSM GPRS
- GSM EGPRS
- CDMA 2000 1xRTT
- CDMA 2000 1xEV-DO REV. A
- WCDMA REL 99
- WCDMA HSDPA

CDMA BC10 band is supported in USA only.


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GH WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


5.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	A1398	C02PM012G3QD		QDS-BRCM1069
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0	N/A

CONDUCTED SETUP

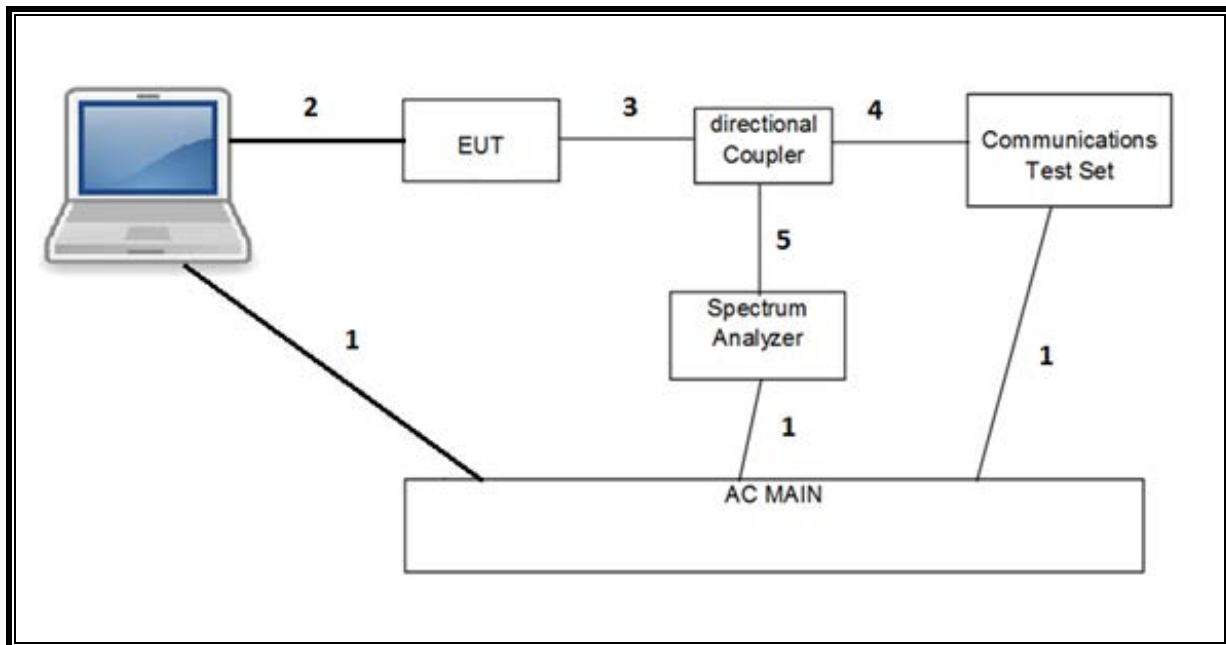

RADIATED SETUP

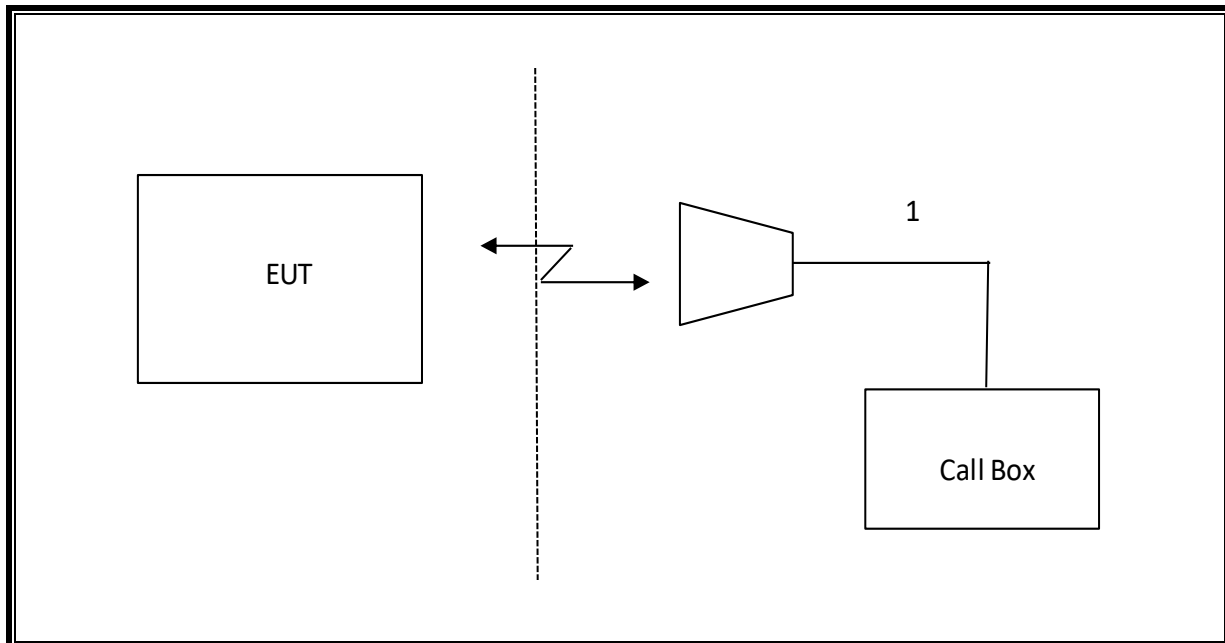

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	A.H. Systems, Inc.	SAS-571	T962	01/25/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	07/20/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	07/07/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T407	05/20/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0184052	11/12/2020
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0181575	09/05/2020
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	10/01/2020
Antenna Horn, 18 to 26GHz	ARA	SWH-28	T125	04/17/2021
Antenna, Horn 26-40GHz	ARA	MWH-2640/B	PRE0182203	04/17/2021
*Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T1165	05/18/2020
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	PRE0181078	05/06/2021
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	PRE0180176	07/14/2021
Amplifier, 100KHz to 1GHz, 32dB	Keysight	8447D	T15	10/26/2020
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	PRE0180175	05/29/2020
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	04/8/2021
Amplifier, 26-40GHz	Miteq	TTA2640	T1864	04/08/2021
Filter, BRF 1850 – 1910 MHz	Micro-Tronics	BRM50714-02	T1796	06/23/2021
Filter, BRF 824 – 848 MHz	Micro-Tronics	BRM20025	PRE0191180	06/23/2021
Filter, HPF 1.2 GHz	MICRO-TRONICS	MICRO-TRONICS	T1737	06/23/2021
*Directional Coupler	KRYTAR	152610	T1536	06/09/2020
*Directional Coupler	KRYTAR	152610	T1161	08/14/2020
*Directional Coupler	KRYTAR	152613	T1537	06/08/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	01/22/2021
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1454	07/15/2021
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T907	01/22/2021
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	N9030A	T908	05/05/2021
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Keysight	E4440A	T198	01/28/2021
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4440A	T200	01/24/2021
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179522	02/18/2021
Wireless Communications Test Set, 8960 Series 10	Agilent	E5515C	T211	02/18/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T948	08/10/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T1871	02/25/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T972	02/24/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T260	02/19/2021
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	02/19/2021
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	12/22/2020
Environmental Chamber	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T1154	12/22/2020
Power Meter, P-series single channel	Keysight	N1912A	T1245	01/22/2021
Power Sensor	Keysight	N1921A	T1225	02/23/2021
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017	
Power Measurement Software	UL	UL RF	Ver 2.7, 2019	
Radiated test software	UL	UL RF	Ver 9.5 June 15, 2019	

NOTES:

* Testing is completed before equipment expiration date.

7. RF OUTPUT POWER VERIFICATION

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 1 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

RESULT

7.1.1. GSM 850

Test Engineer ID:	38602	Test Date:	5/28/2020 – 6/4/2020
-------------------	-------	------------	----------------------

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
					ANT 1	ANT 2
GPRS (GMSK)	CS1	1	128	824.2	33.42	31.97
			190	836.6	33.50	31.90
			251	848.8	33.44	31.85
		2	128	824.2	31.77	30.16
			190	836.6	31.61	31.85
			251	848.8	31.27	29.63
EGPRS (8PSK)	MCS5	1	128	824.2	27.62	25.99
			190	836.6	27.63	25.89
			251	848.8	27.60	25.86
		2	128	824.2	26.40	24.84
			190	836.6	26.30	24.74
			251	848.8	26.37	24.70

7.1.2. GSM 1900

Test Engineer ID:	38602	Test Date:	5/28/2020 – 6/18/2020
-------------------	-------	------------	-----------------------

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)			
					ANT 1	ANT 2	ANT 3	ANT 4
GPRS (GMSK)	CS1	1	512	1850.2	31.92	29.39	30.84	28.55
			661	1880	31.87	29.43	30.83	29.00
			810	1909.8	31.70	29.28	30.91	28.89
		2	512	1850.2	29.23	27.82	28.86	26.62
			661	1880	29.27	27.90	28.95	26.89
			810	1909.8	29.16	27.74	28.87	26.69
EGPRS (8PSK)	MCS5	1	512	1850.2	25.94	23.54	25.52	22.63
			661	1880	25.71	23.71	25.74	23.12
			810	1909.8	25.64	23.71	25.65	23.06
		2	512	1850.2	24.80	22.47	24.51	21.75
			661	1880	24.54	22.67	24.66	22.01
			810	1909.8	24.49	22.67	24.53	21.93

7.2. CDMA

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
--------------------	---------------------

CDMA2000 Mobile Test	B.15.18, L
----------------------	------------

- Protocol Rev > 6 (IS-2000-0)
- System ID: 18; NID: 65535, Reg. Ch. #: 610 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

1xEV-DO - Release 0 (REL 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

1xEV-DO - Revision A (REV A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
 - PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters
 - Sector ID > 00000000: 00000000: 00000000: 00000000
 - Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
 - ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
 - PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
 - Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
 - ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

1x Advanced Setup Procedures used to establish the test signals

Call box setup procedure

- Protocol Rev > 6 (IS-2000-0)
- System ID: 331; NID: 65535, Reg. Ch. #.:
- Radio Config (RC) > Fwd11,Rvs8
- Service Option (SO) Setup > SO75 (Loopback)
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)
- Reverse Power Control Mode: 00-200 to 400 bps
- Smart blanking was disabled.

RESULT

7.2.1. CDMA BC10

Test Engineer ID:	39004	Test Date:	8/6/2020
-------------------	-------	------------	----------

Band	Mode	Radio Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
BC10 (800MHz)	1xRTT	RC1	2 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.3
				670	822.75	25.6	23.2
			55 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
		RC2	9 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
			55 (Loopback)	450	817.25	25.6	23.2
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
		RC3	2 (Loopback)	450	817.25	25.6	23.4
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
			55 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
			32 (+F-SCH)	450	817.25	25.1	23.3
				560	820.00	25.1	23.3
				670	822.75	25.0	23.2
			32 (+SCH)	450	817.25	25.0	23.3
				560	820.00	25.1	23.2
				670	822.75	25.0	23.3
		RC4	2 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.2
				670	822.75	25.6	23.2
			55 (Loopback)	450	817.25	25.6	23.3
				560	820.00	25.6	23.3
				670	822.75	25.6	23.2
			32 (+F-SCH)	450	817.25	25.2	23.3
				560	820.00	25.1	23.2
				670	822.75	25.1	23.2
			32 (+SCH)	450	817.25	25.1	23.2
				560	820.00	25.1	23.3
				670	822.75	25.1	23.2
		RC5	9 (Loopback)	450	817.25	25.2	23.3
				560	820.00	25.2	23.2
				670	822.75	25.2	23.2
			55 (Loopback)	450	817.25	25.2	23.3
				560	820.00	25.2	23.3
				670	822.75	25.2	23.2
	1xAdvanced	RC11	2 (Loopback)	450	817.25	25.2	23.3
				560	820.00	25.2	23.3
				670	822.75	25.1	23.2
			75 (Loopback)	450	817.25	25.3	23.4
				560	820.00	25.2	23.2
				670	822.75	25.2	23.2
			32 (+F-SCH)	450	817.25	25.1	23.3
				560	820.00	25.1	23.2
				670	822.75	25.2	23.2
			32 (+SCH)	450	817.25	25.2	23.4
				560	820.00	25.1	23.2
				670	822.75	25.1	23.3
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	450	817.25	25.6	23.4
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	560	820.00	25.5	23.2
				670	822.75	25.5	23.4
				450	817.25	25.5	23.4
				560	820.00	25.5	23.4
				670	822.75	25.5	23.4

7.2.2. CDMA BC0

Test Engineer ID:	39004	Test Date:	8/6/2020
-------------------	-------	------------	----------

Band	Mode	Radio Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
BC0 (850MHz)	1xRTT	RC1	2 (Loopback)	1013	824.70	25.6	23.6
				384	836.52	25.6	23.6
				777	848.31	25.5	23.6
			55 (Loopback)	1013	824.70	25.6	23.6
				384	836.52	25.5	23.6
				777	848.31	25.5	23.6
		RC2	9 (Loopback)	1013	824.70	25.5	23.6
				384	836.52	25.5	23.6
				777	848.31	25.5	23.6
			55 (Loopback)	1013	824.70	25.6	23.6
				384	836.52	25.7	23.6
				777	848.31	25.5	23.6
		RC3	2 (Loopback)	1013	824.70	25.5	23.6
				384	836.52	25.6	23.6
				777	848.31	25.5	23.6
			55 (Loopback)	1013	824.70	25.5	23.6
				384	836.52	25.5	23.6
				777	848.31	25.6	23.6
			32 (+F-SCH)	1013	824.70	25.2	23.3
				384	836.52	25.1	23.4
				777	848.31	25.1	23.3
			32 (+SCH)	1013	824.70	25.1	23.3
				384	836.52	25.1	23.3
				777	848.31	25.1	23.3
		RC4	2 (Loopback)	1013	824.70	25.6	23.6
				384	836.52	25.5	23.6
				777	848.31	25.5	23.6
			55 (Loopback)	1013	824.70	25.2	23.6
				384	836.52	25.1	23.6
				777	848.31	25.2	23.6
			32 (+F-SCH)	1013	824.70	25.1	23.3
				384	836.52	25.2	23.3
				777	848.31	25.2	23.4
			32 (+SCH)	1013	824.70	25.2	23.3
				384	836.52	25.2	23.3
				777	848.31	25.1	23.3
		RC5	9 (Loopback)	1013	824.70	25.2	23.6
				384	836.52	25.2	23.6
				777	848.31	25.1	23.6
			55 (Loopback)	1013	824.70	25.2	23.6
				384	836.52	25.1	23.6
				777	848.31	25.1	23.6
	1xAdvanced	RC11	9 (Loopback)	1013	824.70	25.2	23.4
				384	836.52	25.2	23.4
				777	848.31	25.2	23.5
			55 (Loopback)	1013	824.70	25.1	23.4
				384	836.52	25.1	23.4
				777	848.31	25.2	23.5
			32 (+F-SCH)	1013	824.70	25.2	23.3
				384	836.52	25.2	23.4
				777	848.31	25.2	23.5
			32 (+SCH)	1013	824.70	25.2	23.5
				384	836.52	25.1	23.4
				777	848.31	25.3	23.5
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	1013	824.70	25.7	23.6
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	384	836.52	25.7	23.6
				777	848.31	25.3	23.3
				1013	824.70	25.7	23.5
				384	836.52	25.7	23.5
				777	848.31	25.1	23.5

7.2.3. CDMA BC1

Test Engineer ID:	39004	Test Date:	8/6/2020
-------------------	-------	------------	----------

Band	Mode	Radio Configuration (RC)	Service Option (SO)	Ch No.	Freq. (MHz)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
BC1 (1900MHz)	1xRTT	RC1	2 (Loopback)	25	1851.25	25.1	22.5
				600	1880.00	25.2	22.3
				1175	1908.75	25.1	22.4
			55 (Loopback)	25	1851.25	25.1	22.5
				600	1880.00	25.2	22.4
				1175	1908.75	25.2	22.4
		RC2	9 (Loopback)	25	1851.25	25.1	22.5
				600	1880.00	25.2	22.4
				1175	1908.75	25.2	22.4
			55 (Loopback)	25	1851.25	25.1	22.5
				600	1880.00	25.2	22.4
				1175	1908.75	25.2	22.4
		RC3	2 (Loopback)	25	1851.25	25.1	22.6
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.7
			55 (Loopback)	25	1851.25	25.1	22.5
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.6
			32 (+F-SCH)	25	1851.25	25.3	22.6
				600	1880.00	25.4	22.6
				1175	1908.75	25.4	22.7
			32 (+SCH)	25	1851.25	25.3	22.6
				600	1880.00	25.4	22.6
				1175	1908.75	25.5	22.6
		RC4	2 (Loopback)	25	1851.25	25.1	22.6
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.6
			55 (Loopback)	25	1851.25	25.1	22.6
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.6
			32 (+F-SCH)	25	1851.25	25.3	22.6
				600	1880.00	25.4	22.6
				1175	1908.75	25.5	22.7
			32 (+SCH)	25	1851.25	25.4	22.6
				600	1880.00	25.4	22.6
				1175	1908.75	25.5	22.7
		RC5	9 (Loopback)	25	1851.25	25.1	22.6
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.7
			55 (Loopback)	25	1851.25	25.1	22.6
				600	1880.00	25.2	22.6
				1175	1908.75	25.2	22.6
	1xAdvanced	RC11	2 (Loopback)	25	1851.25	25.4	22.7
				600	1880.00	25.5	22.7
				1175	1908.75	25.6	22.7
			55 (Loopback)	25	1851.25	25.5	22.7
				600	1880.00	25.5	22.7
				1175	1908.75	25.6	22.7
			32 (+F-SCH)	25	1851.25	25.4	22.7
				600	1880.00	25.4	22.7
				1175	1908.75	25.5	22.7
			32 (+SCH)	25	1851.25	25.5	22.7
				600	1880.00	25.4	22.6
				1175	1908.75	25.6	22.7
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK)	RTAP Rate: 153.6 kbps	25	1851.25	25.4	22.6
				600	1880	25.6	22.2
				1175	1908.75	25.5	22.4
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK	RETAP: 4096	25	1851.25	25.4	22.7
				600	1880	25.6	22.6
				1175	1908.75	25.6	22.6

7.3. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSPA REL 6 (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

DUAL CARRIER HSDPA (DC-HSDPA (REL 8, CAT 24)

The following 4 Sub-tests for DC-HSDPA were completed according to Release 8 procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings are illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

RESULT

7.3.1. WCDMA BAND 5

Test Engineer ID:	38602	Test Date:	5/28/2020 – 6/4/2020
-------------------	-------	------------	----------------------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)	
						ANT 1	ANT 2
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	25.7	23.8
			4183	836.6	N/A	25.7	23.9
			4233	846.6	N/A	25.7	23.8
	HSDPA	Subtest 1	4132	826.4	0	24.7	22.8
			4183	836.6	0	24.7	22.9
			4233	846.6	0	24.7	22.9
		Subtest 2	4132	826.4	0	24.7	22.8
			4183	836.6	0	24.8	22.9
			4233	846.6	0	24.7	22.9
		Subtest 3	4132	826.4	0.5	24.2	22.3
			4183	836.6	0.5	24.2	22.4
			4233	846.6	0.5	24.2	22.4
		Subtest 4	4132	826.4	0.5	24.2	22.3
			4183	836.6	0.5	24.3	22.4
			4233	846.6	0.5	24.2	22.4
	HSPA (HSDPA & HSUPA)	Subtest 1	4132	826.4	0	24.7	22.8
			4183	836.6	0	24.7	22.9
			4233	846.6	0	24.6	22.8
		Subtest 2	4132	826.4	2	22.7	20.9
			4183	836.6	2	22.6	20.9
			4233	846.6	2	22.6	20.8
		Subtest 3	4132	826.4	1	23.7	21.8
			4183	836.6	1	23.6	21.9
			4233	846.6	1	23.5	21.8
		Subtest 4	4132	826.4	2	22.6	20.8
			4183	836.6	2	22.6	20.9
			4233	846.6	2	22.6	20.8
		Subtest 5	4132	826.4	0	24.2	22.4
			4183	836.6	0	24.2	22.4
			4233	846.6	0	24.1	22.4
	DC-HSDPA	Subtest 1	4132	826.4	0	24.6	22.8
			4183	836.6	0	24.6	22.9
			4233	846.6	0	24.6	22.8
		Subtest 2	4132	826.4	0	24.7	22.8
			4183	836.6	0	24.7	22.9
			4233	846.6	0	24.7	22.8
		Subtest 3	4132	826.4	0.5	24.2	22.3
			4183	836.6	0.5	24.2	22.4
			4233	846.6	0.5	24.2	22.4
		Subtest 4	4132	826.4	0.5	24.2	22.3
			4183	836.6	0.5	24.2	22.4
			4233	846.6	0.5	24.2	22.3

7.3.2. WCDMA BAND 2

Test Engineer ID:	38602	Test Date:	5/28/2020 – 6/18/2020
-------------------	-------	------------	-----------------------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)			
						ANT 1	ANT 2	ANT 3	ANT 4
W-CDMA Band 2 (1900MHz)	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	25.6	23.1	24.5	22.5
			9400	1880.0	N/A	25.6	23.0	24.6	22.6
			9538	1907.6	N/A	25.7	23.1	24.7	22.7
	HSDPA	Subtest 1	9262	1852.4	0	24.7	22.2	23.5	21.6
			9400	1880.0	0	24.7	22.1	23.6	21.6
			9538	1907.6	0	24.8	22.1	23.7	21.7
		Subtest 2	9262	1852.4	0	24.7	22.2	23.5	21.5
			9400	1880.0	0	24.8	22.0	23.6	21.6
			9538	1907.6	0	24.8	22.0	23.7	21.7
		Subtest 3	9262	1852.4	0.5	24.3	21.6	23.0	21.0
			9400	1880.0	0.5	24.3	21.4	23.1	21.1
			9538	1907.6	0.5	24.3	21.6	23.2	21.2
		Subtest 4	9262	1852.4	0.5	24.3	21.6	23.0	21.1
			9400	1880.0	0.5	24.3	21.5	23.1	21.2
			9538	1907.6	0.5	24.4	21.6	23.2	21.2
	HSPA (HSDPA & HSUPA)	Subtest 1	9262	1852.4	0	24.8	22.1	23.5	21.6
			9400	1880.0	0	24.7	22.0	23.6	21.7
			9538	1907.6	0	24.7	22.0	23.7	21.7
		Subtest 2	9262	1852.4	2	22.7	20.1	21.5	19.6
			9400	1880.0	2	22.6	20.0	21.6	19.7
			9538	1907.6	2	22.6	20.0	21.7	19.8
		Subtest 3	9262	1852.4	1	23.6	21.1	22.5	20.6
			9400	1880.0	1	23.6	20.9	22.6	20.7
			9538	1907.6	1	23.6	21.0	22.7	20.8
		Subtest 4	9262	1852.4	2	22.6	20.1	21.5	19.7
			9400	1880.0	2	22.6	19.9	21.6	19.8
			9538	1907.6	2	22.6	19.9	21.7	19.8
		Subtest 5	9262	1852.4	0	24.2	21.6	23.1	21.2
			9400	1880.0	0	24.2	21.5	23.2	21.3
			9538	1907.6	0	24.2	21.5	23.3	21.4
	DC-HSDPA	Subtest 1	9262	1852.4	0	24.7	22.1	23.6	21.7
			9400	1880.0	0	24.7	22.0	23.7	21.8
			9538	1907.6	0	24.8	22.0	23.8	21.8
		Subtest 2	9262	1852.4	0	24.7	22.1	23.6	21.6
			9400	1880.0	0	24.8	22.0	23.7	21.7
			9538	1907.6	0	24.9	22.0	23.8	21.8
		Subtest 3	9262	1852.4	0.5	24.3	21.6	23.1	21.1
			9400	1880.0	0.5	24.3	21.5	23.2	20.9
			9538	1907.6	0.5	24.4	21.6	23.3	21.0
		Subtest 4	9262	1852.4	0.5	24.4	21.7	23.1	20.9
			9400	1880.0	0.5	24.3	21.6	23.2	21.0
			9538	1907.6	0.5	24.4	21.6	23.3	21.1

7.3.3. WCDMA BAND 4

Test Engineer ID:	38602	Test Date:	5/28/2020 – 6/18/2020
-------------------	-------	------------	-----------------------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Conducted Average Power (dBm)			
						ANT 1	ANT 2	ANT 3	ANT 4
W-CDMA Band 4 (1700MHz)	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	25.5	23.1	24.7	22.7
			1413	1732.6	N/A	25.6	23.1	24.5	22.5
			1513	1752.6	N/A	25.7	23.0	24.5	22.5
	HSDPA	Subtest 1	1312	1712.4	0	24.6	22.1	23.6	21.8
			1413	1732.6	0	24.6	22.1	23.5	21.5
			1513	1752.6	0	24.7	22.0	23.5	21.5
		Subtest 2	1312	1712.4	0	24.5	22.1	23.6	21.7
			1413	1732.6	0	24.6	22.1	23.4	21.5
			1513	1752.6	0	24.7	22.0	23.4	21.5
		Subtest 3	1312	1712.4	0.5	24.1	21.6	23.1	21.3
			1413	1732.6	0.5	24.1	21.6	22.9	21.0
			1513	1752.6	0.5	24.1	21.5	22.9	21.0
		Subtest 4	1312	1712.4	0.5	24.1	21.6	23.1	21.3
			1413	1732.6	0.5	24.0	21.6	22.9	21.0
			1513	1752.6	0.5	24.2	21.5	23.0	21.0
	HSPA (HSDPA & HSUPA)	Subtest 1	1312	1712.4	0	24.6	22.1	23.6	21.8
			1413	1732.6	0	24.4	22.1	23.4	21.6
			1513	1752.6	0	24.5	21.9	23.5	21.6
		Subtest 2	1312	1712.4	2	22.4	20.1	21.6	19.8
			1413	1732.6	2	22.4	20.0	21.4	19.6
			1513	1752.6	2	22.4	19.9	21.5	19.6
		Subtest 3	1312	1712.4	1	23.4	21.1	22.6	20.8
			1413	1732.6	1	23.3	21.0	22.4	20.6
			1513	1752.6	1	23.4	21.0	22.4	20.6
		Subtest 4	1312	1712.4	2	22.4	20.1	21.6	19.8
			1413	1732.6	2	22.4	20.0	21.5	19.6
			1513	1752.6	2	22.4	19.9	21.5	19.6
		Subtest 5	1312	1712.4	0	24.0	21.6	23.2	21.4
			1413	1732.6	0	23.9	21.6	23.1	21.1
			1513	1752.6	0	24.0	21.5	23.1	21.2
	DC-HSDPA	Subtest 1	1312	1712.4	0	24.4	22.0	23.6	21.6
			1413	1732.6	0	24.4	21.9	23.4	21.4
			1513	1752.6	0	24.5	21.8	23.4	21.4
		Subtest 2	1312	1712.4	0	24.5	22.0	23.6	21.6
			1413	1732.6	0	24.5	21.9	23.4	21.4
			1513	1752.6	0	24.6	21.9	23.4	21.4
		Subtest 3	1312	1712.4	0.5	24.1	21.5	23.0	21.1
			1413	1732.6	0.5	24.1	21.5	22.9	20.9
			1513	1752.6	0.5	24.1	21.4	22.9	20.9
		Subtest 4	1312	1712.4	0.5	24.1	21.5	23.0	21.1
			1413	1732.6	0.5	24.1	21.5	22.9	20.9
			1513	1752.6	0.5	24.2	21.4	22.9	20.9

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049
ISED: RSS132; RSS133§2.3; RSS139

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
850	GPRS	190	836.6	244.9125	312.846
	EGPRS			246.0786	302.196
1900	GPRS	661	1880.0	242.6955	308.247
	EGPRS			233.5200	301.599


CDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BC10	1xRTT	560	820.0	1.2787	1.437
	1xEV-DO Rev A			1.2818	1.429
BC0	1xRTT	384	836.5	1.2766	1.437
	1xEV-DO Rev A			1.2775	1.436
BC1	1xRTT	600	1880.0	1.2778	1.432
	1xEV-DO Rev A			1.2791	1.433


WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND 5	REL 99	4408	836.6	4.1239	4.708
	HSDPA			4.1267	4.659
BAND 2	REL 99	9800	1880.0	4.1469	4.676
	HSDPA			4.1253	4.682
BAND 4	REL 99	1638	1732.6	4.1346	4.713
	HSDPA			4.1316	4.696


8.1.1. GSM

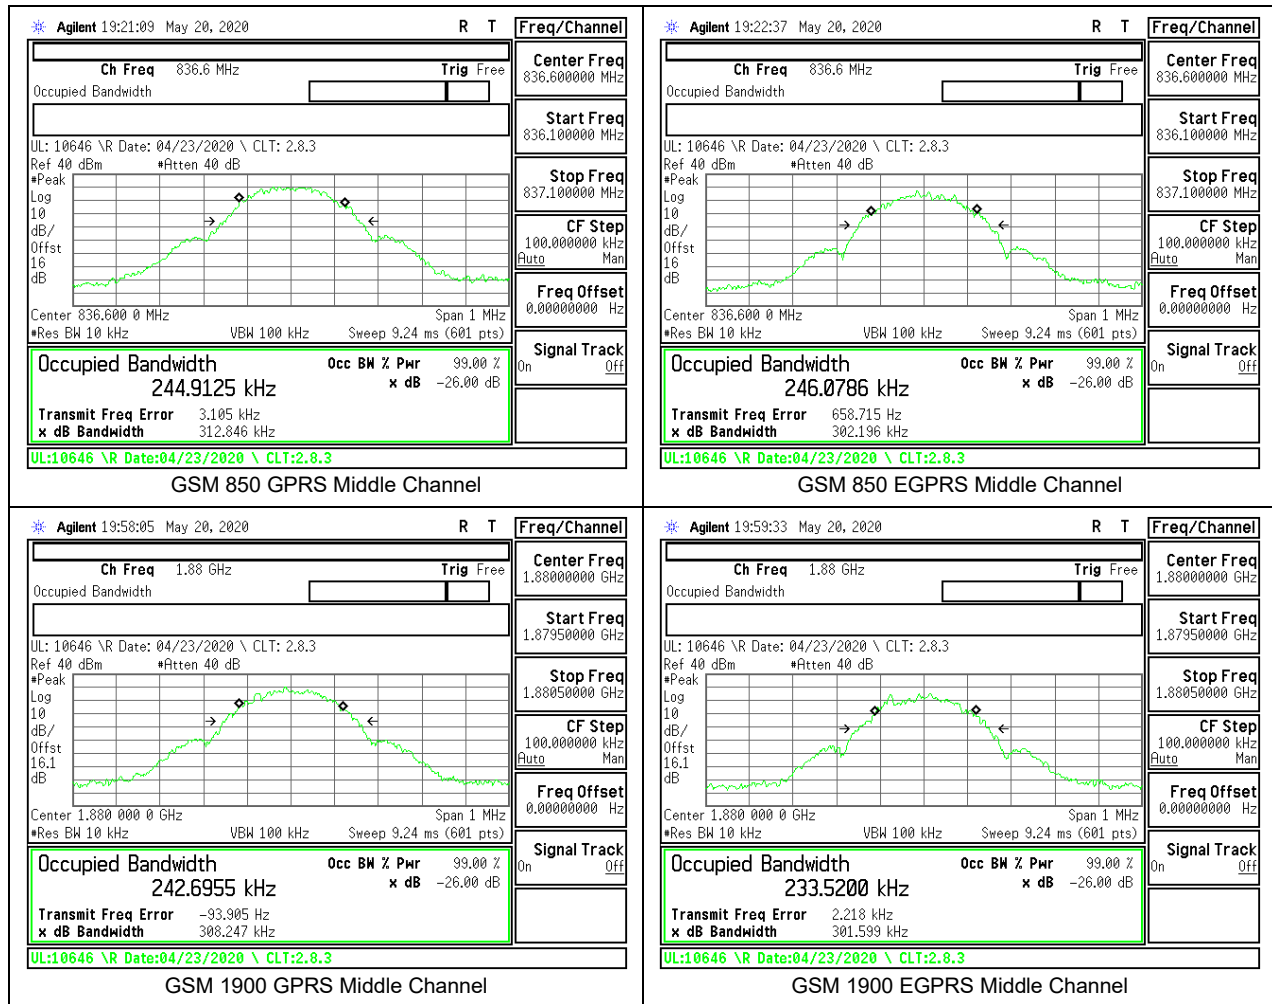


8.1.2. CDMA

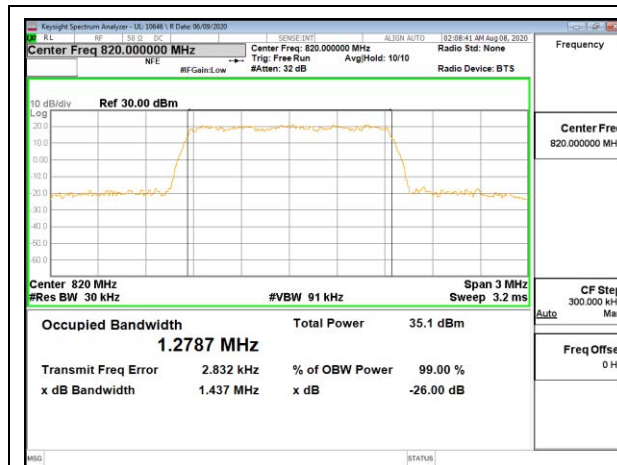


CDMA BC10 1xRTT Middle Channel

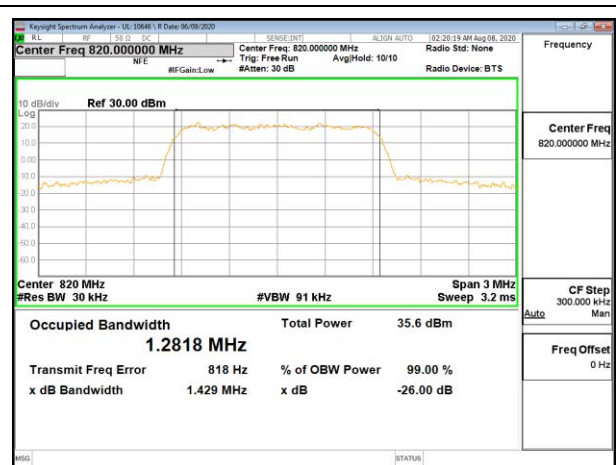


CDMA BC10 1xEV-DO Rev A Middle Channel

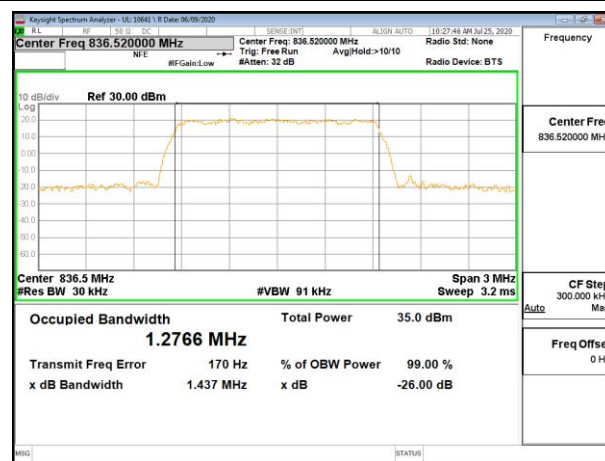


CDMA BC0 1xRTT Middle Channel

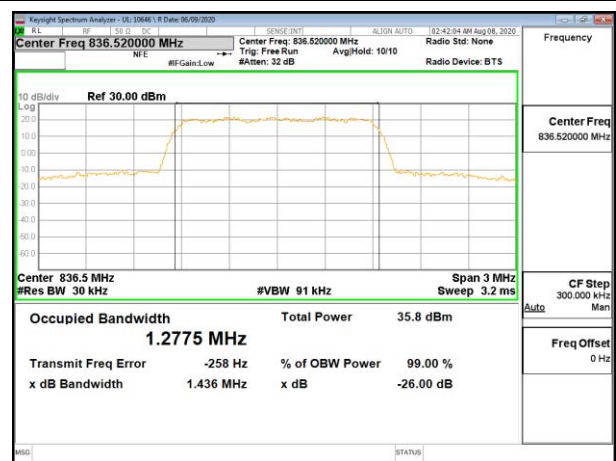

CDMA BC0 1xEV-DO Rev A Middle Channel

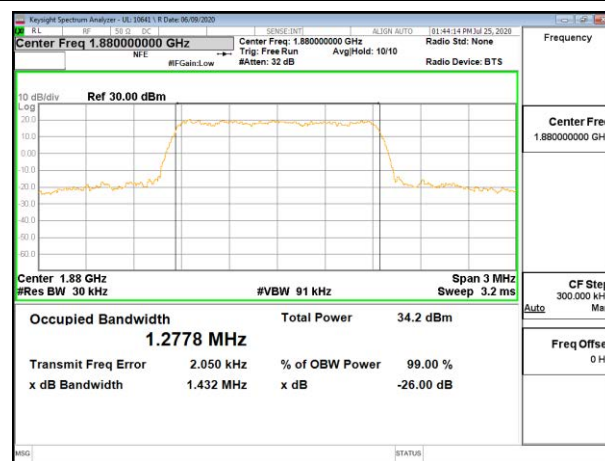


CDMA BC1 1xRTT Middle Channel

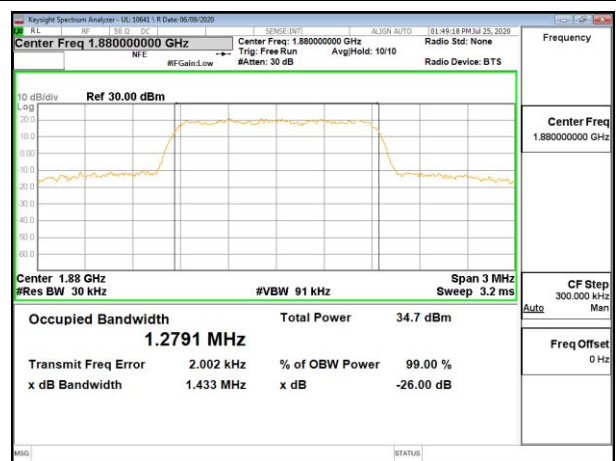

CDMA BC1 1xEV-DO Rev A Middle Channel

8.1.3. WCDMA

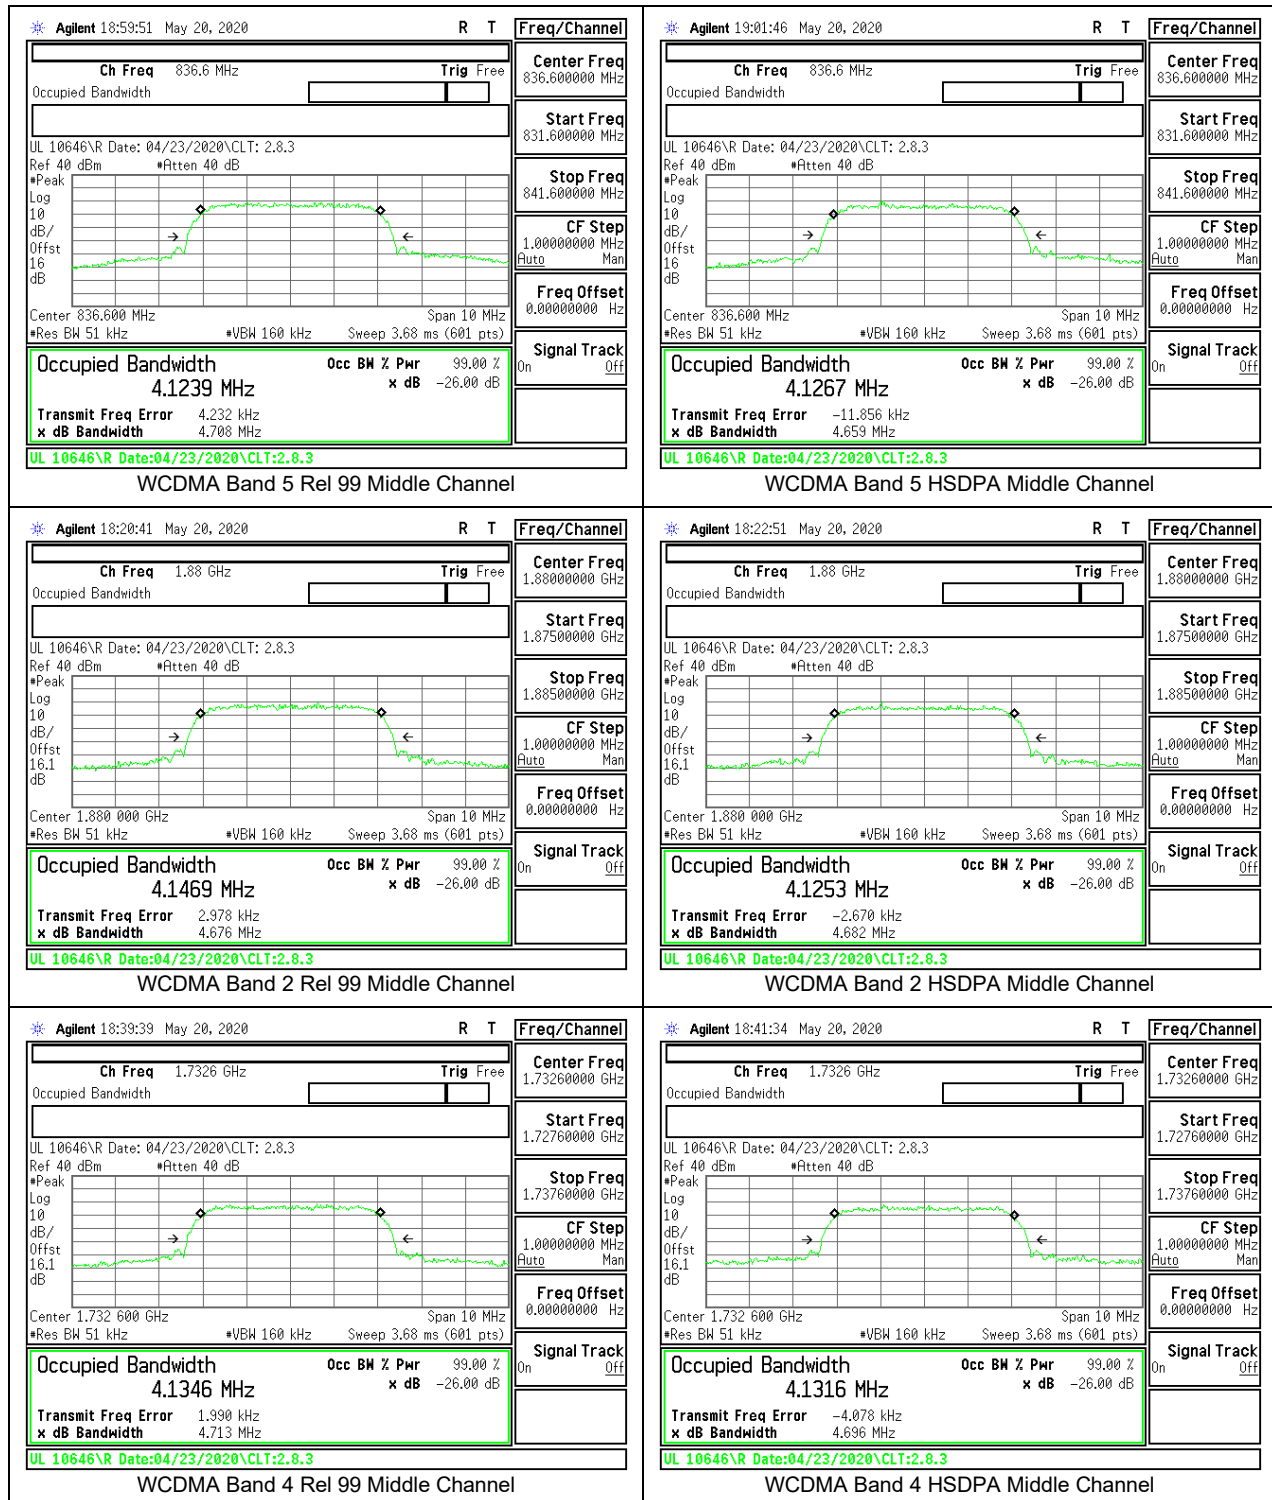

8.2. BAND EDGE AND EMISSION MASK

LIMITS

FCC: §22.917, §24.238, §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

- (i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

- (i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS139§6.6

- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote 2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

TEST PROCEDURE

The transmitter output was connected to a R&S CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.

RESULTS

8.2.1. GSM 850



GSM 850 GPRS Low Channel



GSM 850 GPRS High Channel




GSM 850 EGPRS Low Channel




GSM 850 EGPRS High Channel

8.2.2. GSM 1900

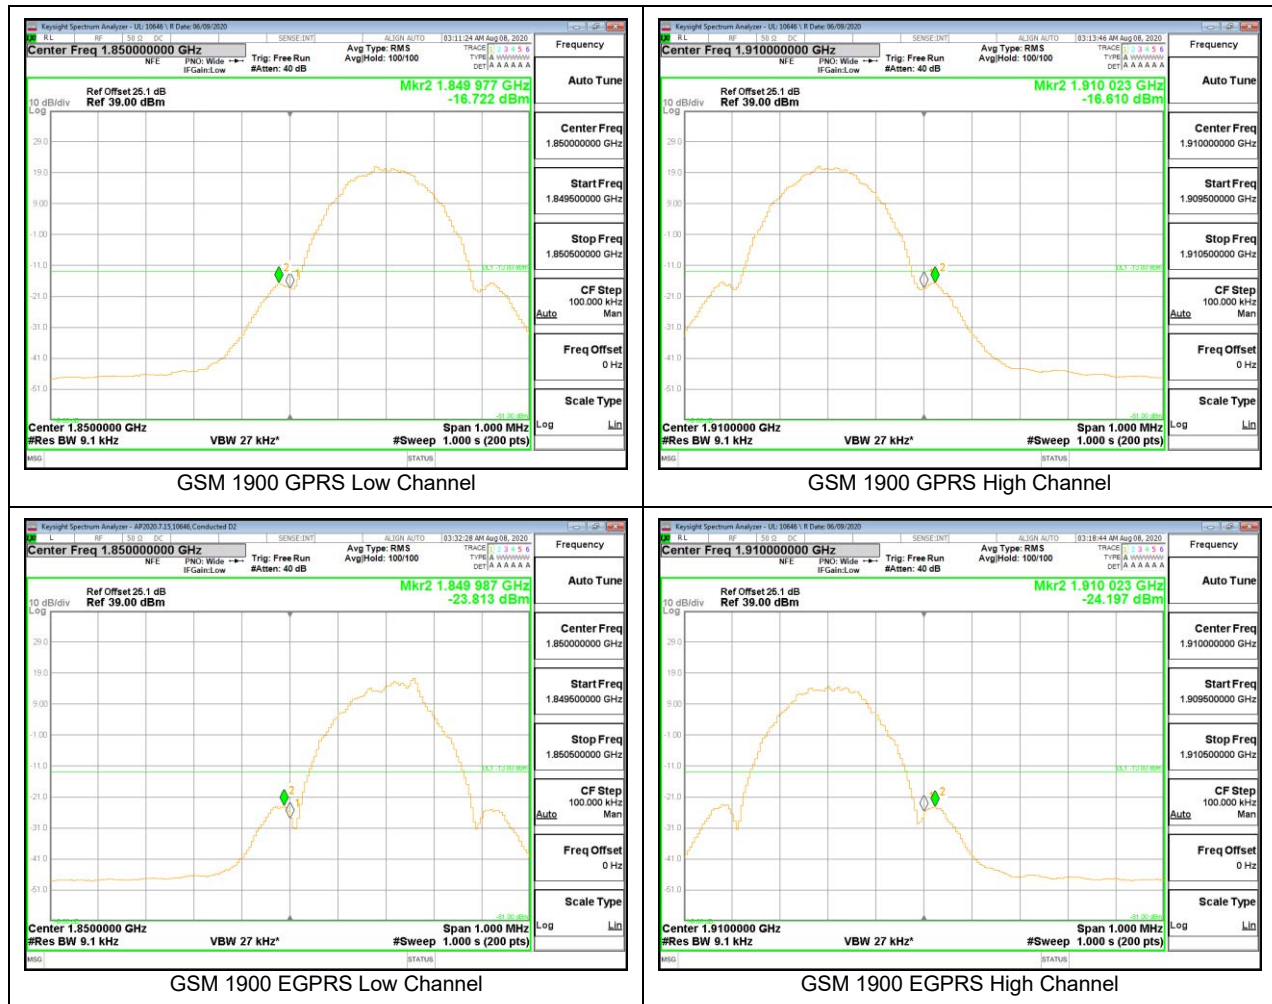


8.2.3. CDMA BC10


Test Engineer ID:	10646	Test Date:	8/8/2020
-------------------	-------	------------	----------

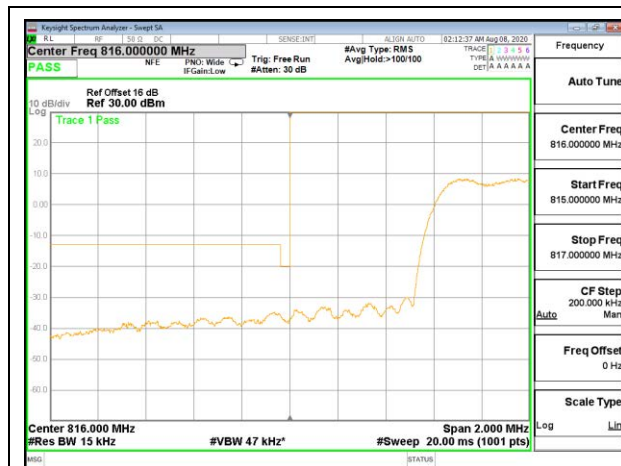


CDMA BC10 1xRTT Low Channel, RBW=1% of EBW

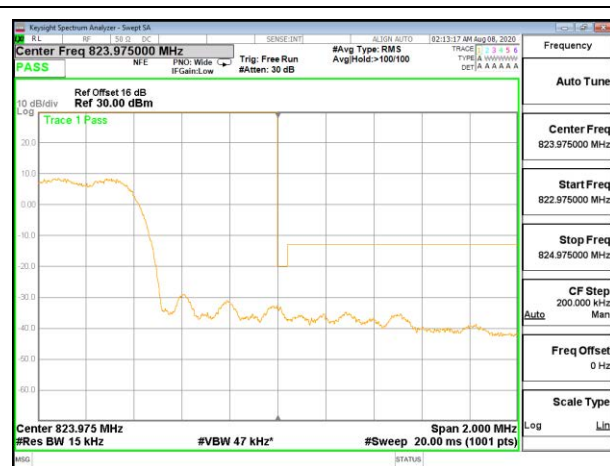

CDMA BC10 1xRTT High Channel, RBW=1% of EBW

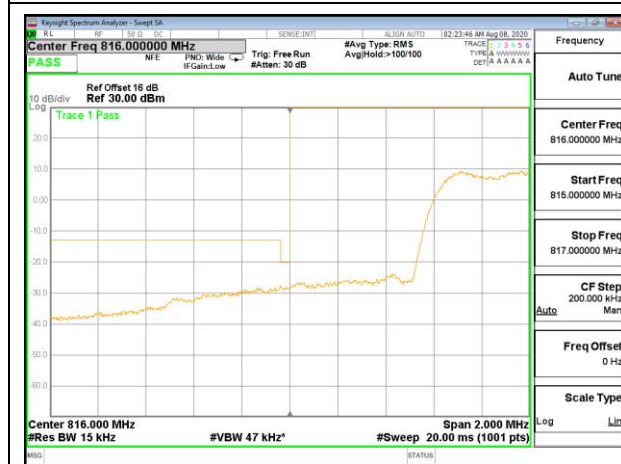


CDMA BC10 1xEV-DO Rev A Low Channel, RBW=1% of EBW

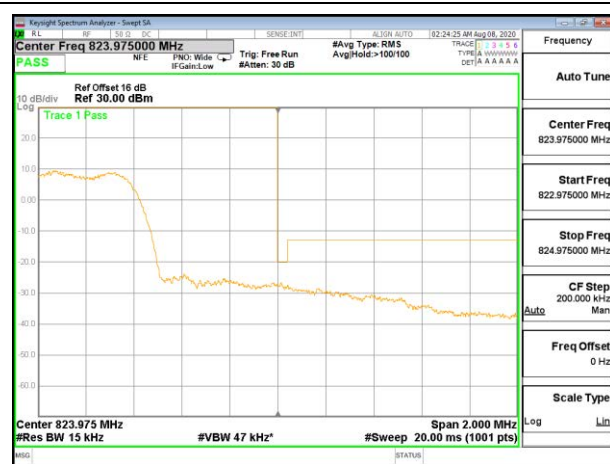


CDMA BC10 1xEV-DO Rev A High Channel, RBW=1% of EBW

8.2.4. CDMA BC0


Test Engineer ID:	10646	Test Date:	8/6/2020 & 8/14/2020
-------------------	-------	------------	----------------------

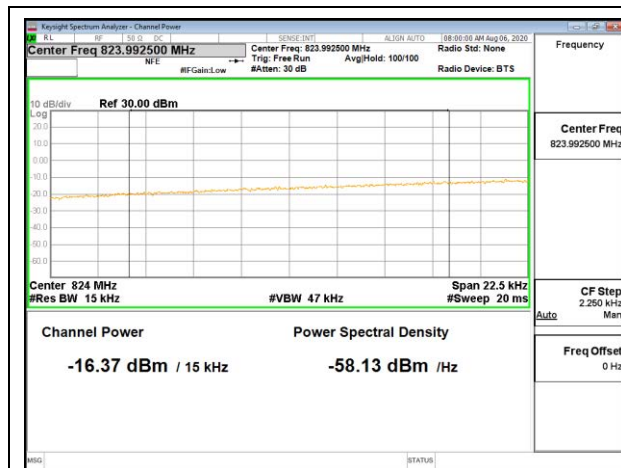


CDMA BC0 1xRTT Low Channel

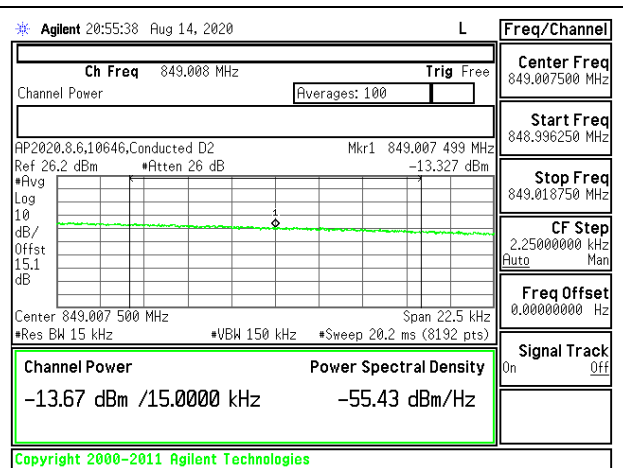

CDMA BC0 1xRTT High Channel

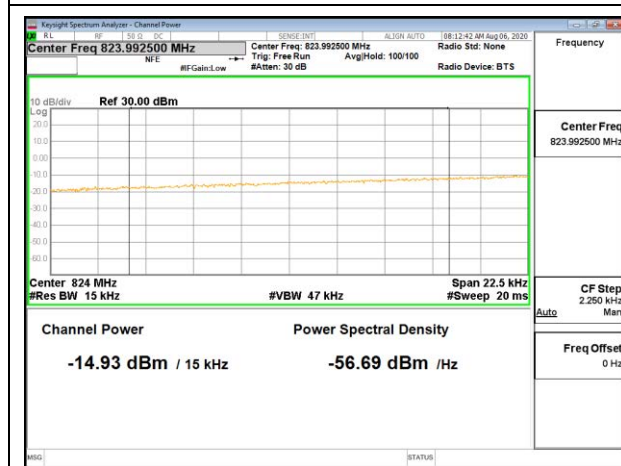


CDMA BC0 1xEV-DO Rev A Low Channel

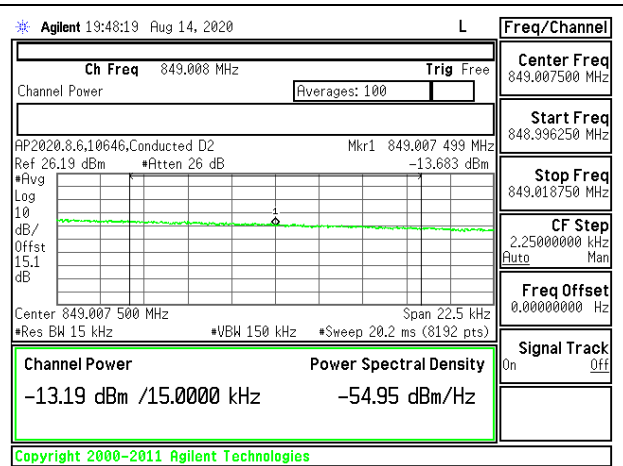


CDMA BC0 1xEV-DO Rev A High Channel


8.2.5. CDMA BC1

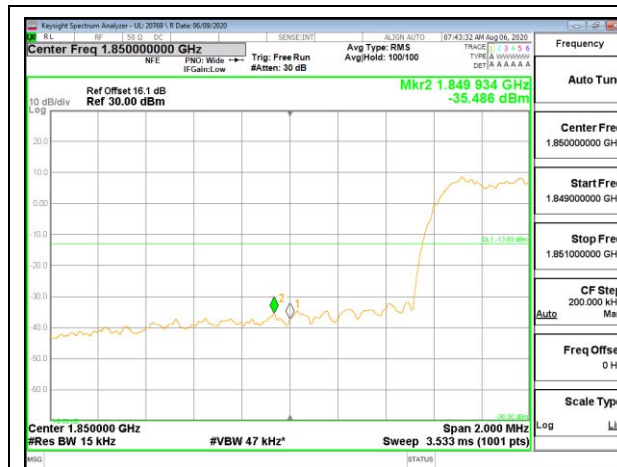

CDMA BC1 1xRTT Low Channel

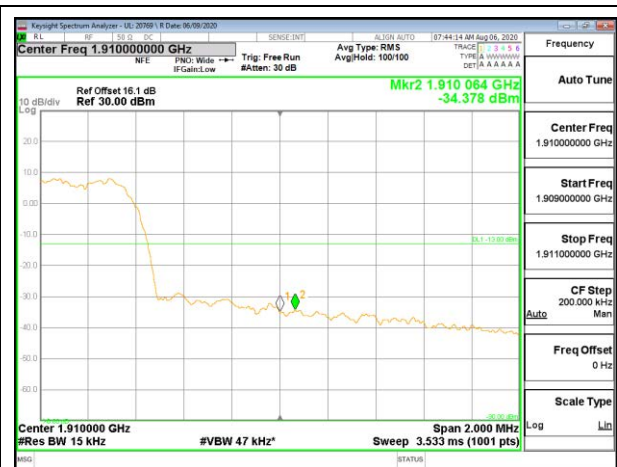

CDMA BC1 1xRTT High Channel

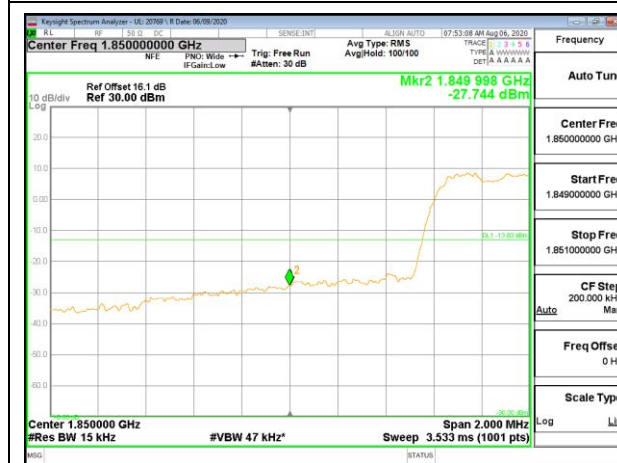


CDMA BC1 1xEV-DO Rev A Low Channel




CDMA BC1 1xEV-DO Rev A High Channel


8.2.6. WCDMA BAND 5

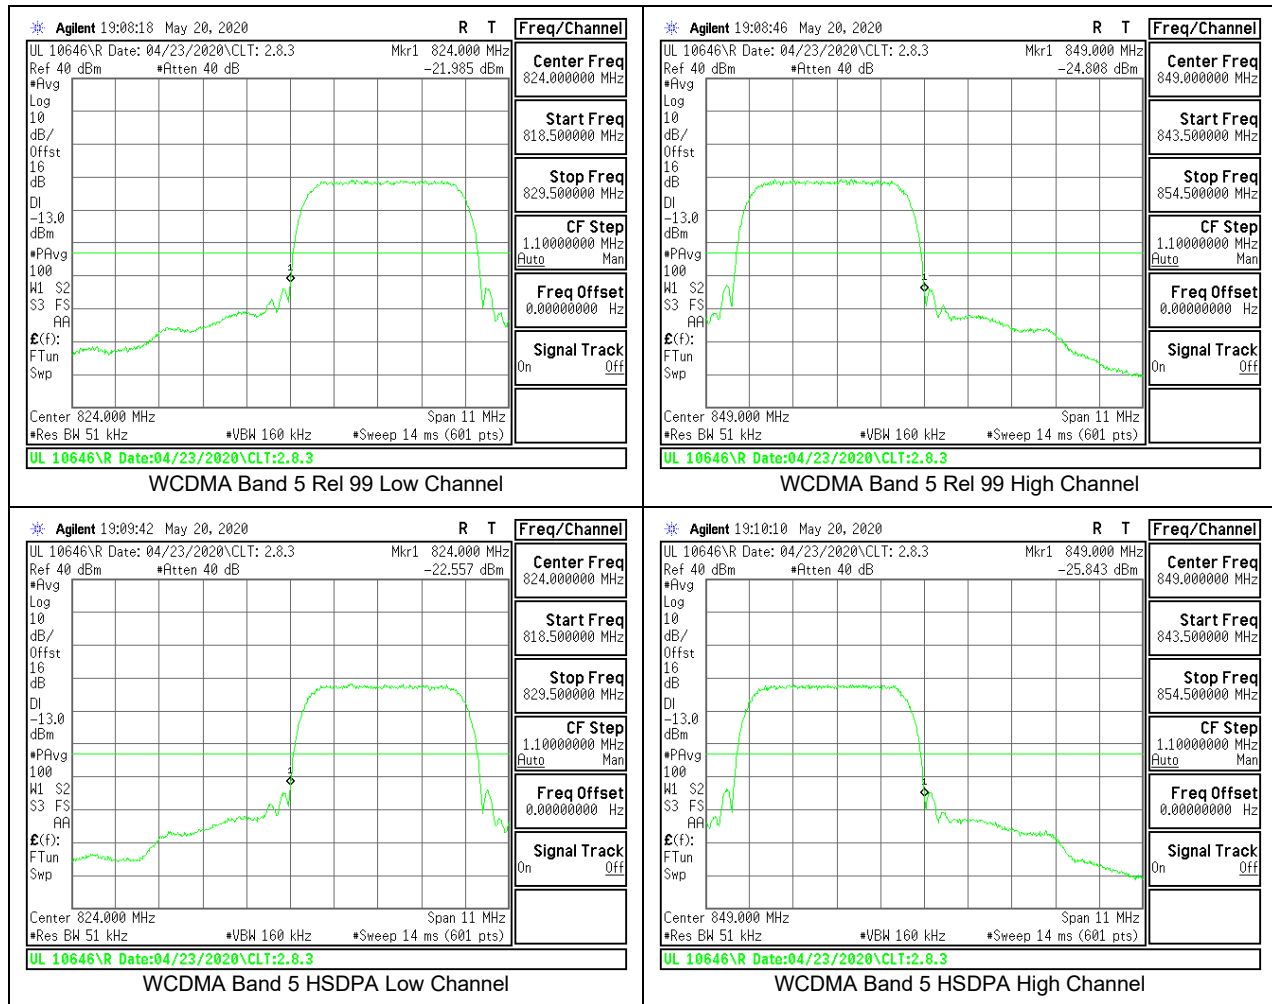

8.2.7. WCDMA BAND 2

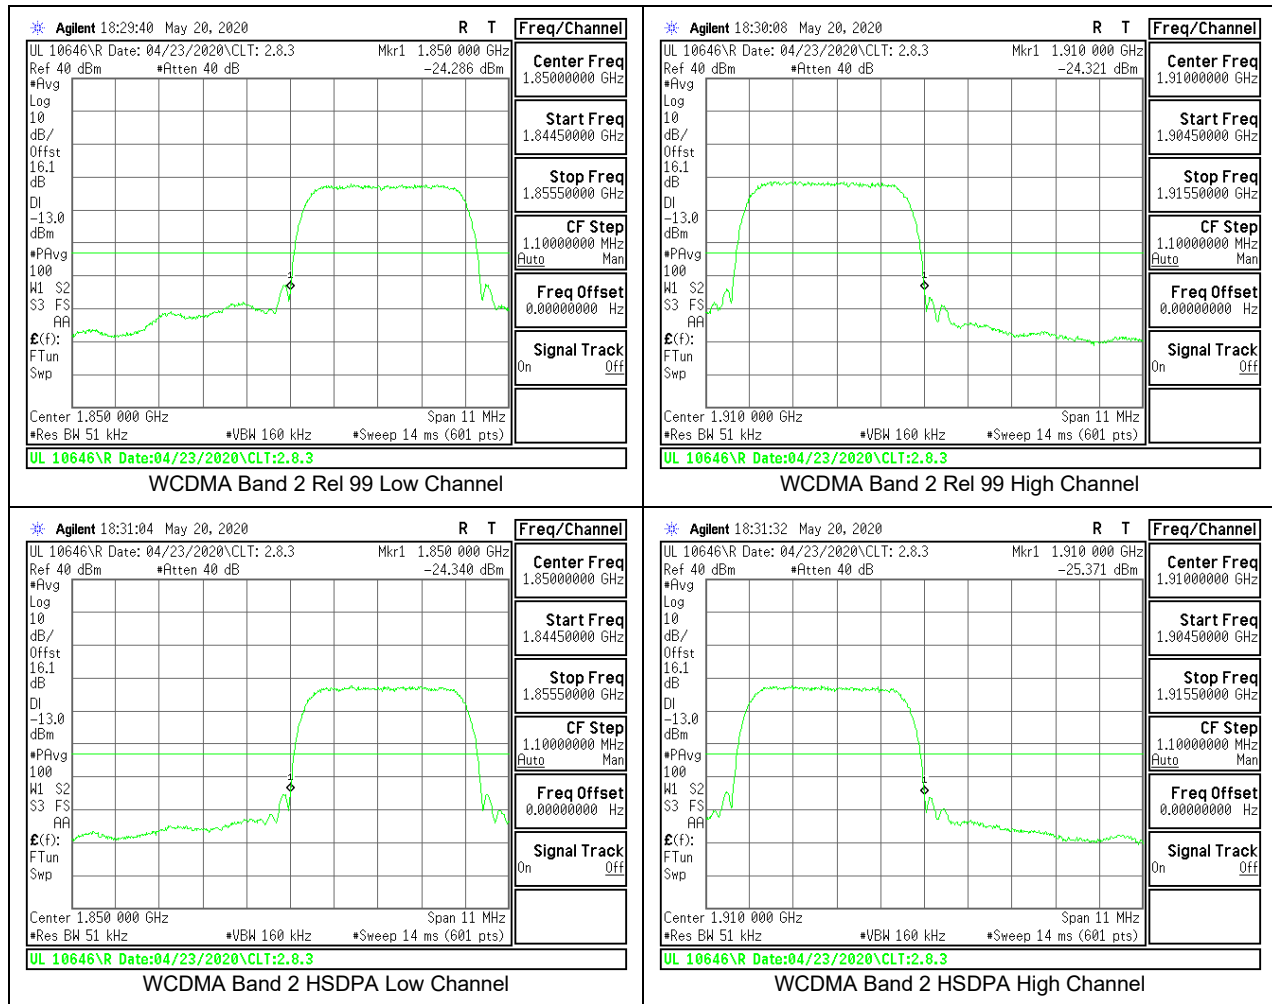

8.2.8. WCDMA BAND 4

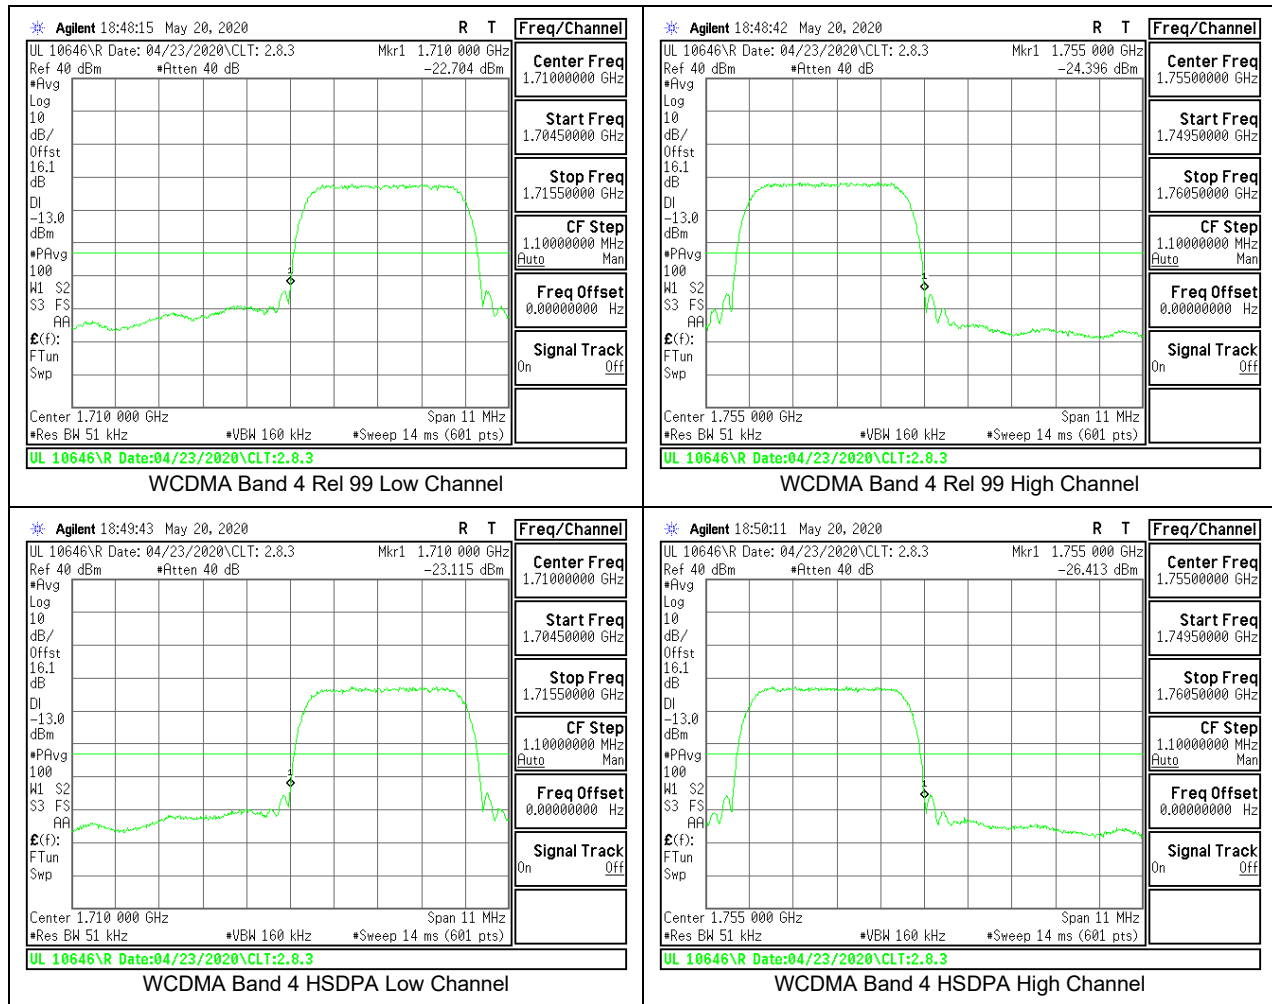

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53 and §90.691
ISED: RSS132§5.5; RSS133§6.5 and RSS139§6.6

LIMITS

FCC: §22.917, §24.238, §27.53 (h), §90.691

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

RSS132§5.5, RSS133§6.5, RSS139§6.6

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:


- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)

RESULTS


8.3.1. GSM 850

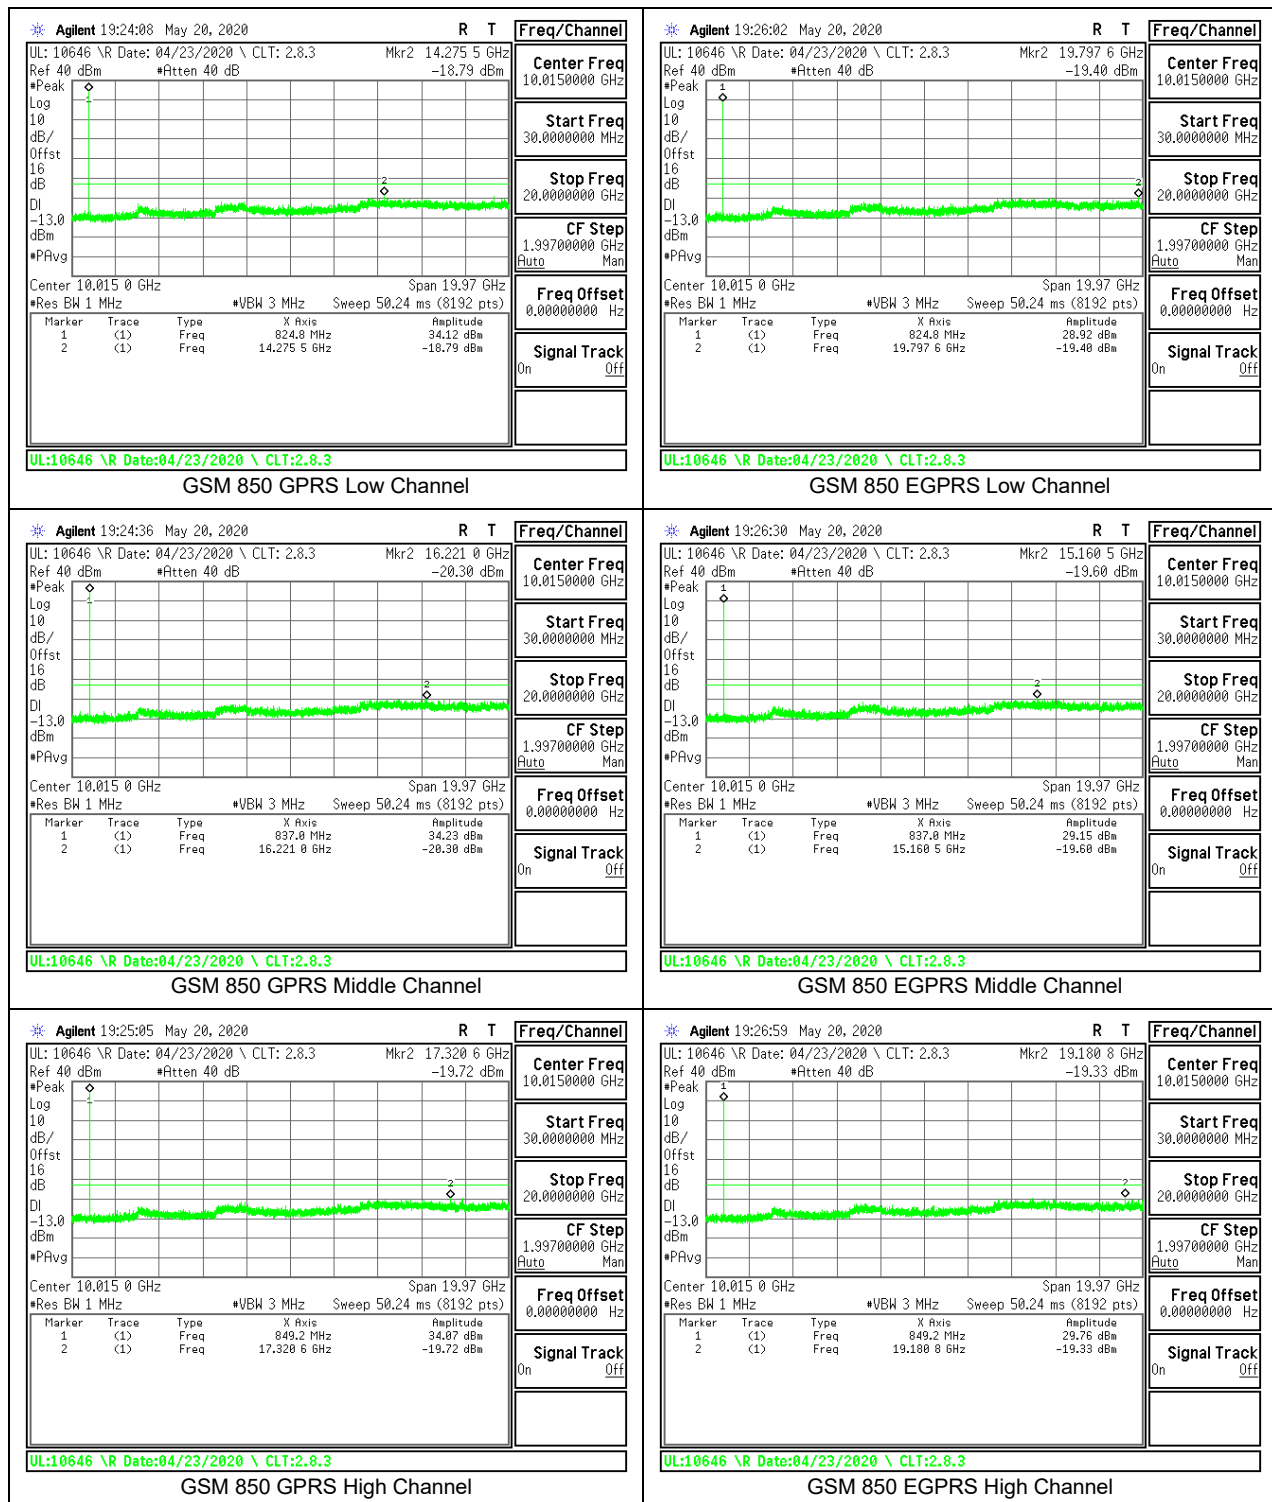


8.3.2. GSM 1900

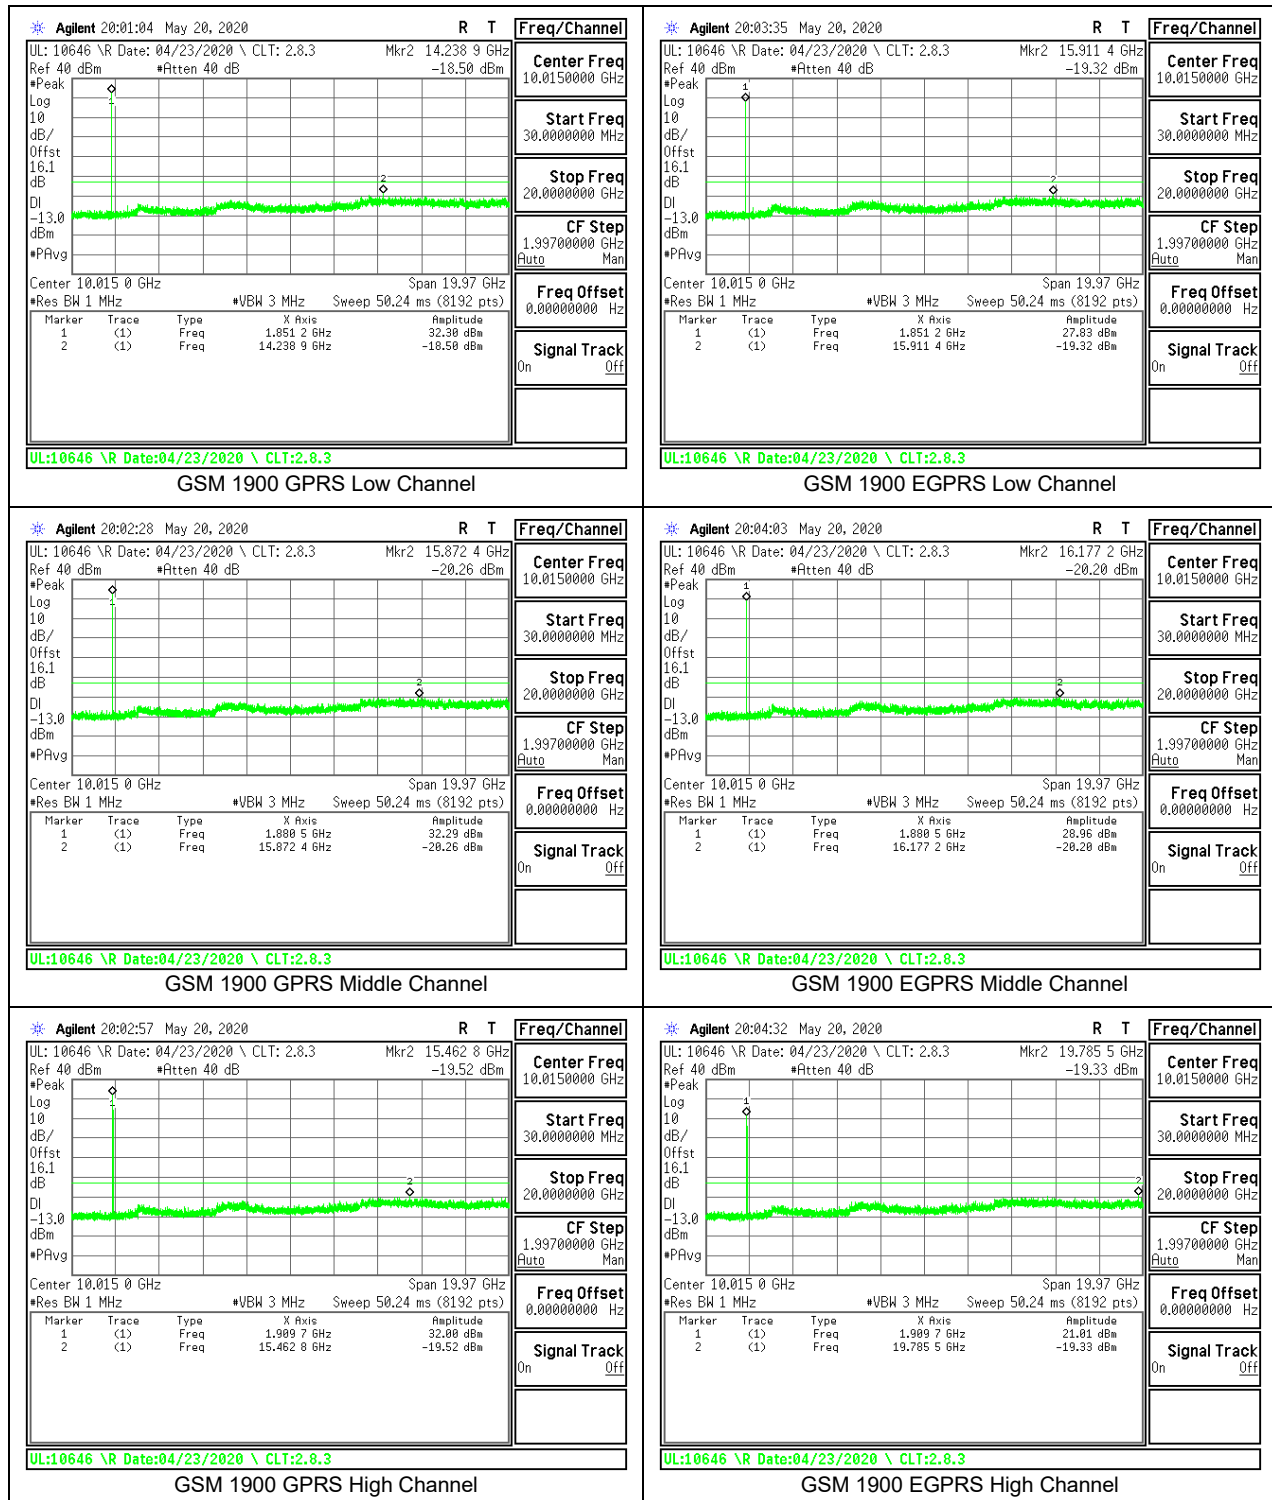


8.3.3. CDMA BC10

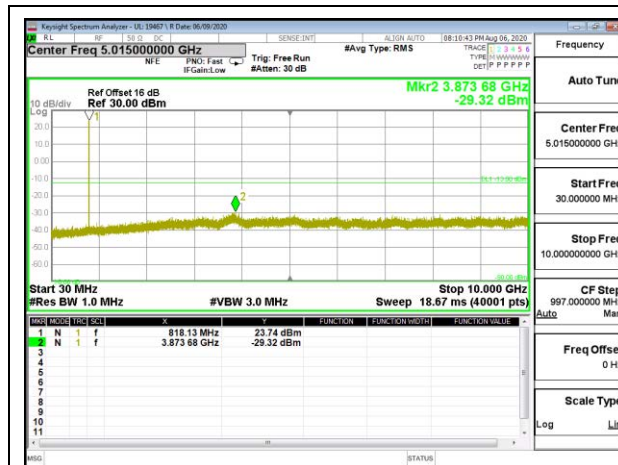


CDMA BC10 1xRTT Low Channel

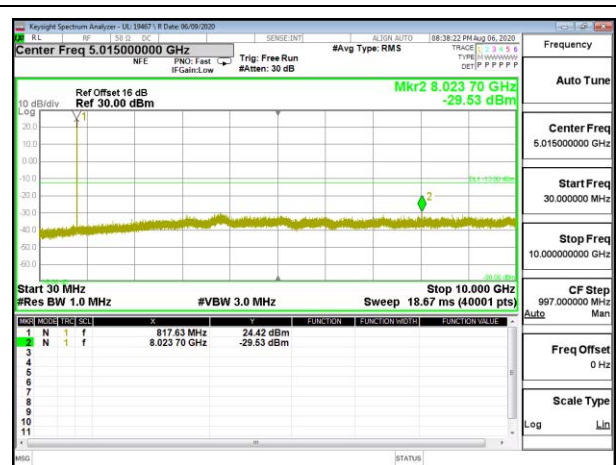


CDMA BC10 1xEV-DO Rev A Low Channel

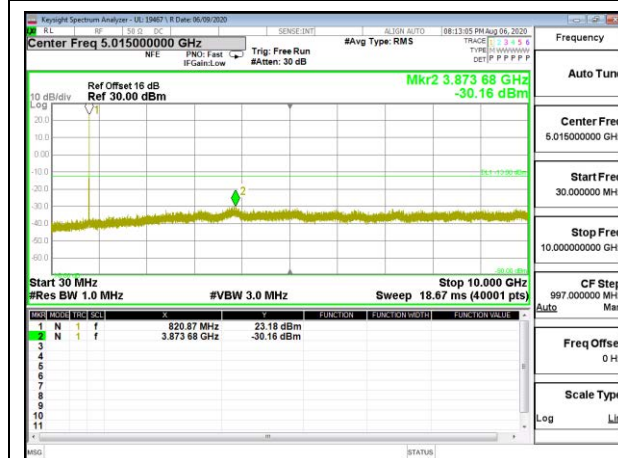


CDMA BC10 1xRTT Middle Channel

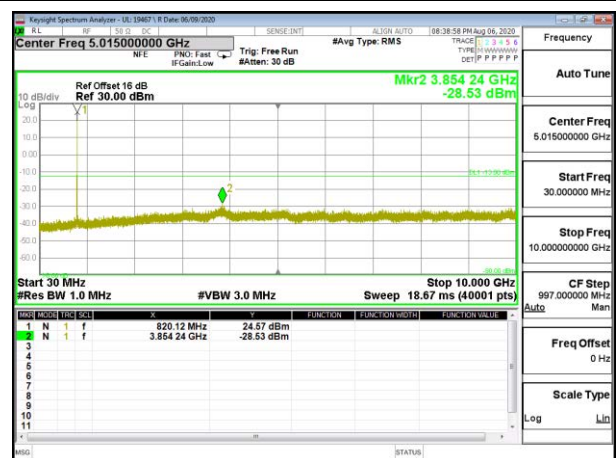

CDMA BC10 1xEV-DO Rev A Middle Channel

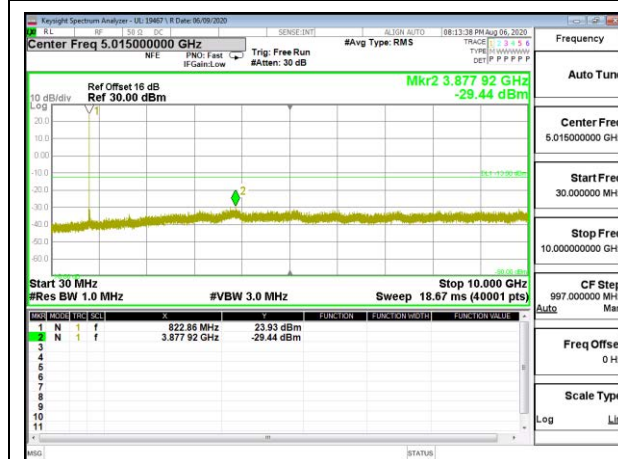


CDMA BC10 1xRTT High Channel

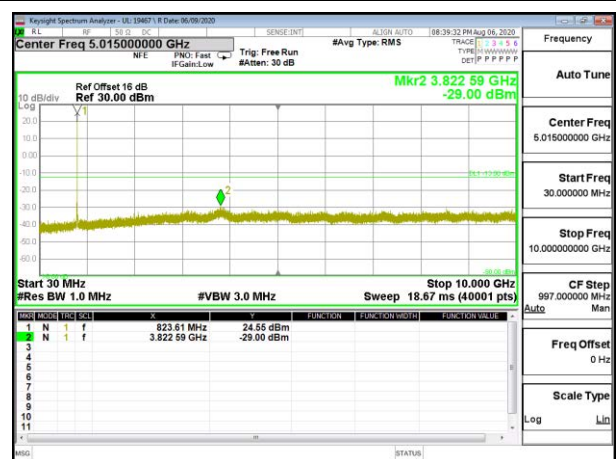


CDMA BC10 1xEV-DO Rev A High Channel


8.3.4. CDMA BC0

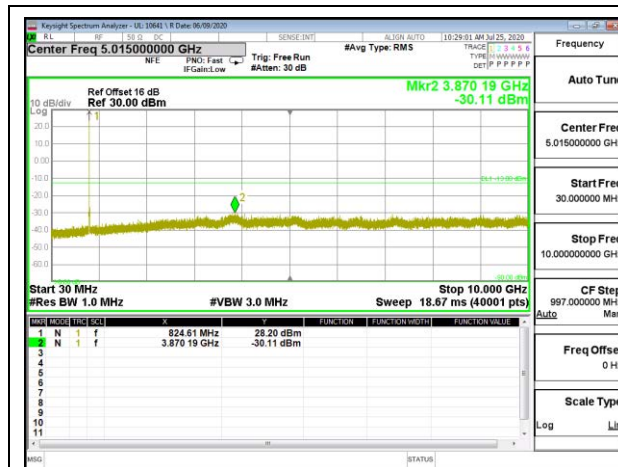


CDMA BC0 1xRTT Low Channel

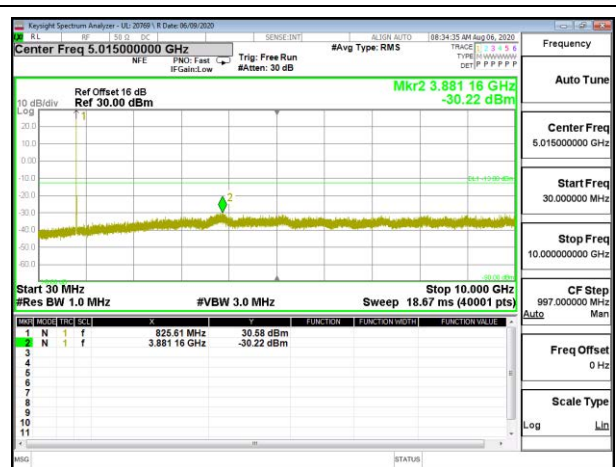


CDMA BC0 1xEV-DO Rev A Low Channel

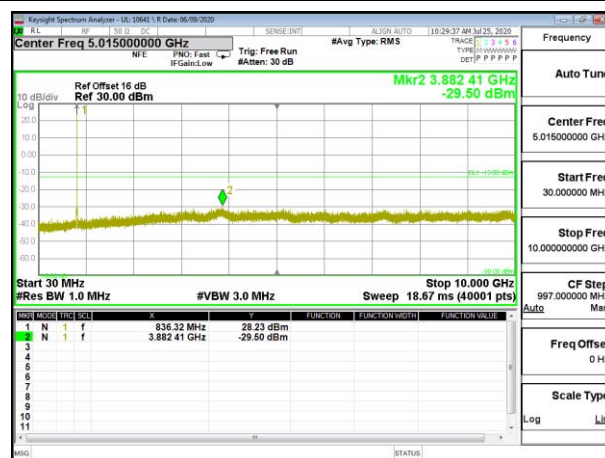


CDMA BC0 1xRTT Middle Channel

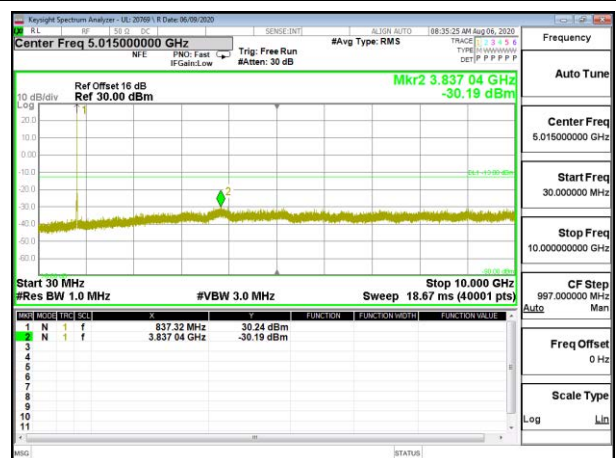

CDMA BC0 1xEV-DO Rev A Middle Channel

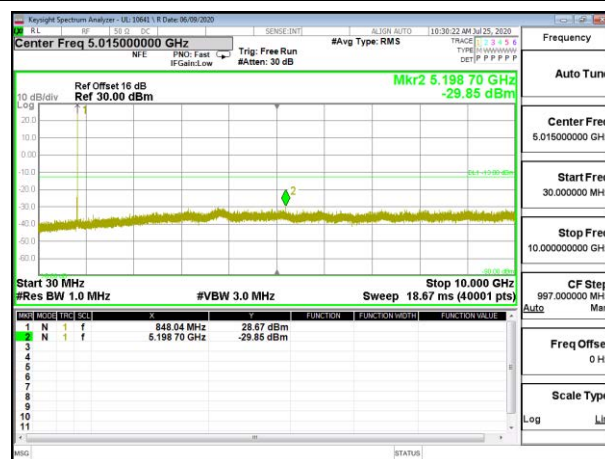


CDMA BC0 1xRTT High Channel

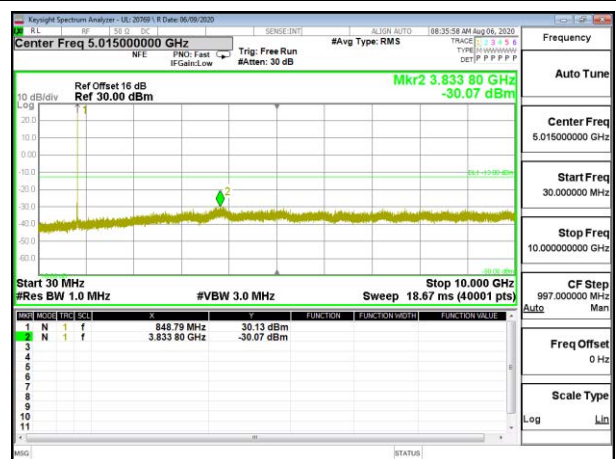


CDMA BC0 1xEV-DO Rev A High Channel


8.3.5. CDMA BC1

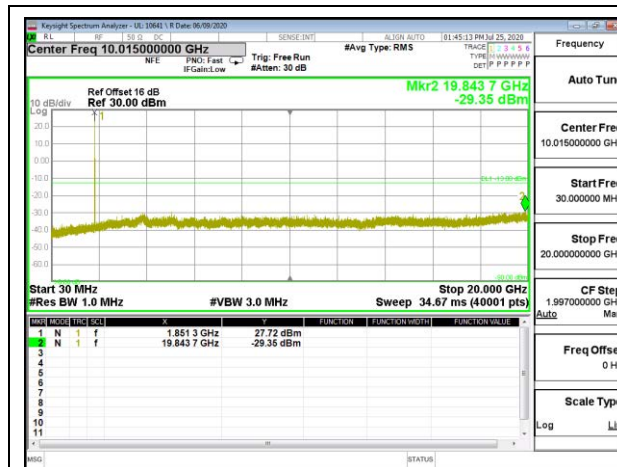


CDMA BC1 1xRTT Low Channel

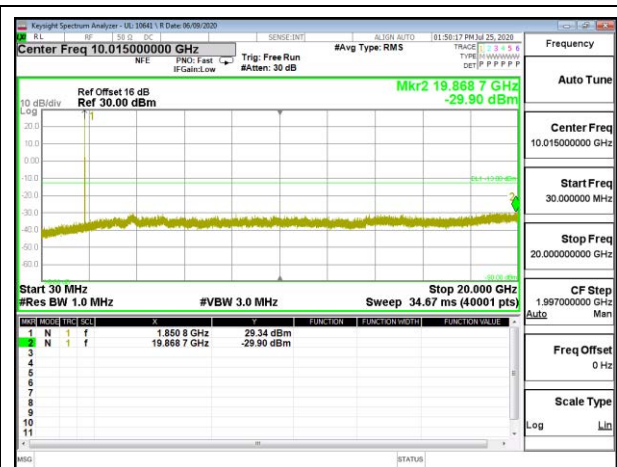


CDMA BC1 1xEV-DO Rev A Low Channel

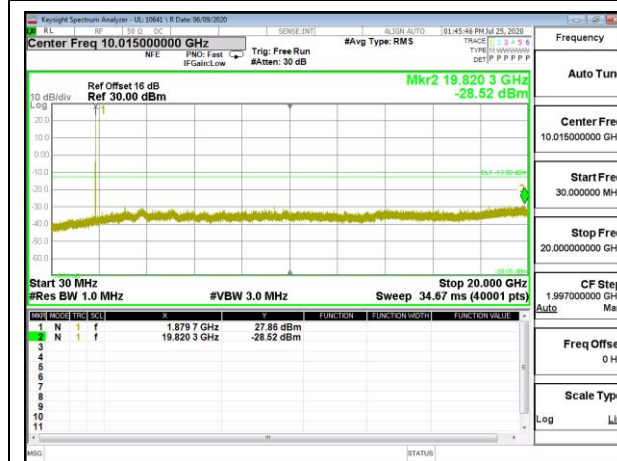


CDMA BC1 1xRTT Middle Channel

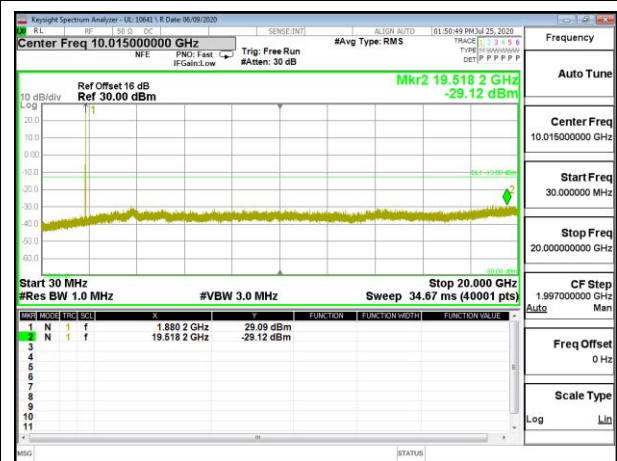

CDMA BC1 1xEV-DO Rev A Middle Channel

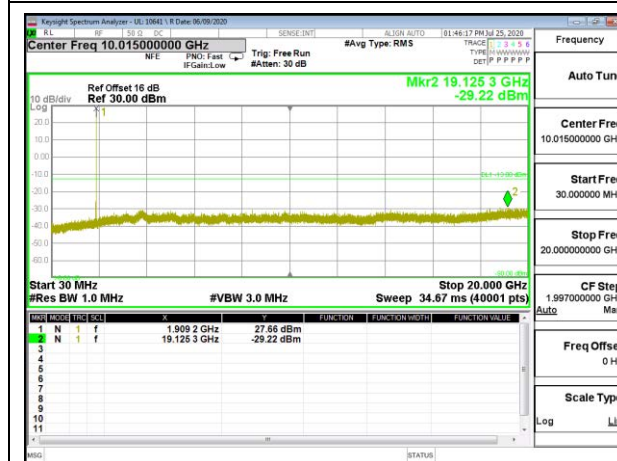


CDMA BC1 1xRTT High Channel

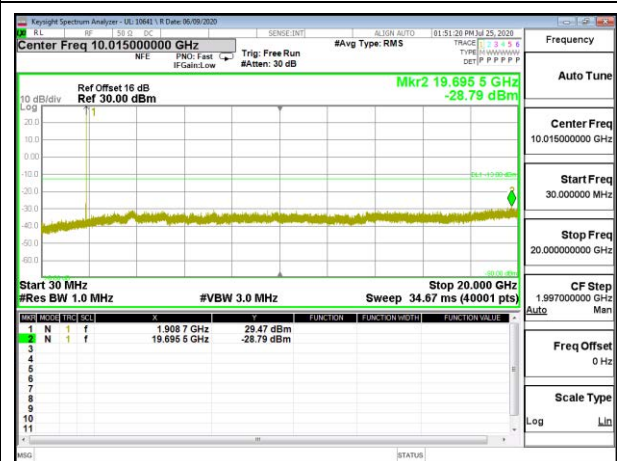


CDMA BC1 1xEV-DO Rev A High Channel


8.3.6. WCDMA BAND 5

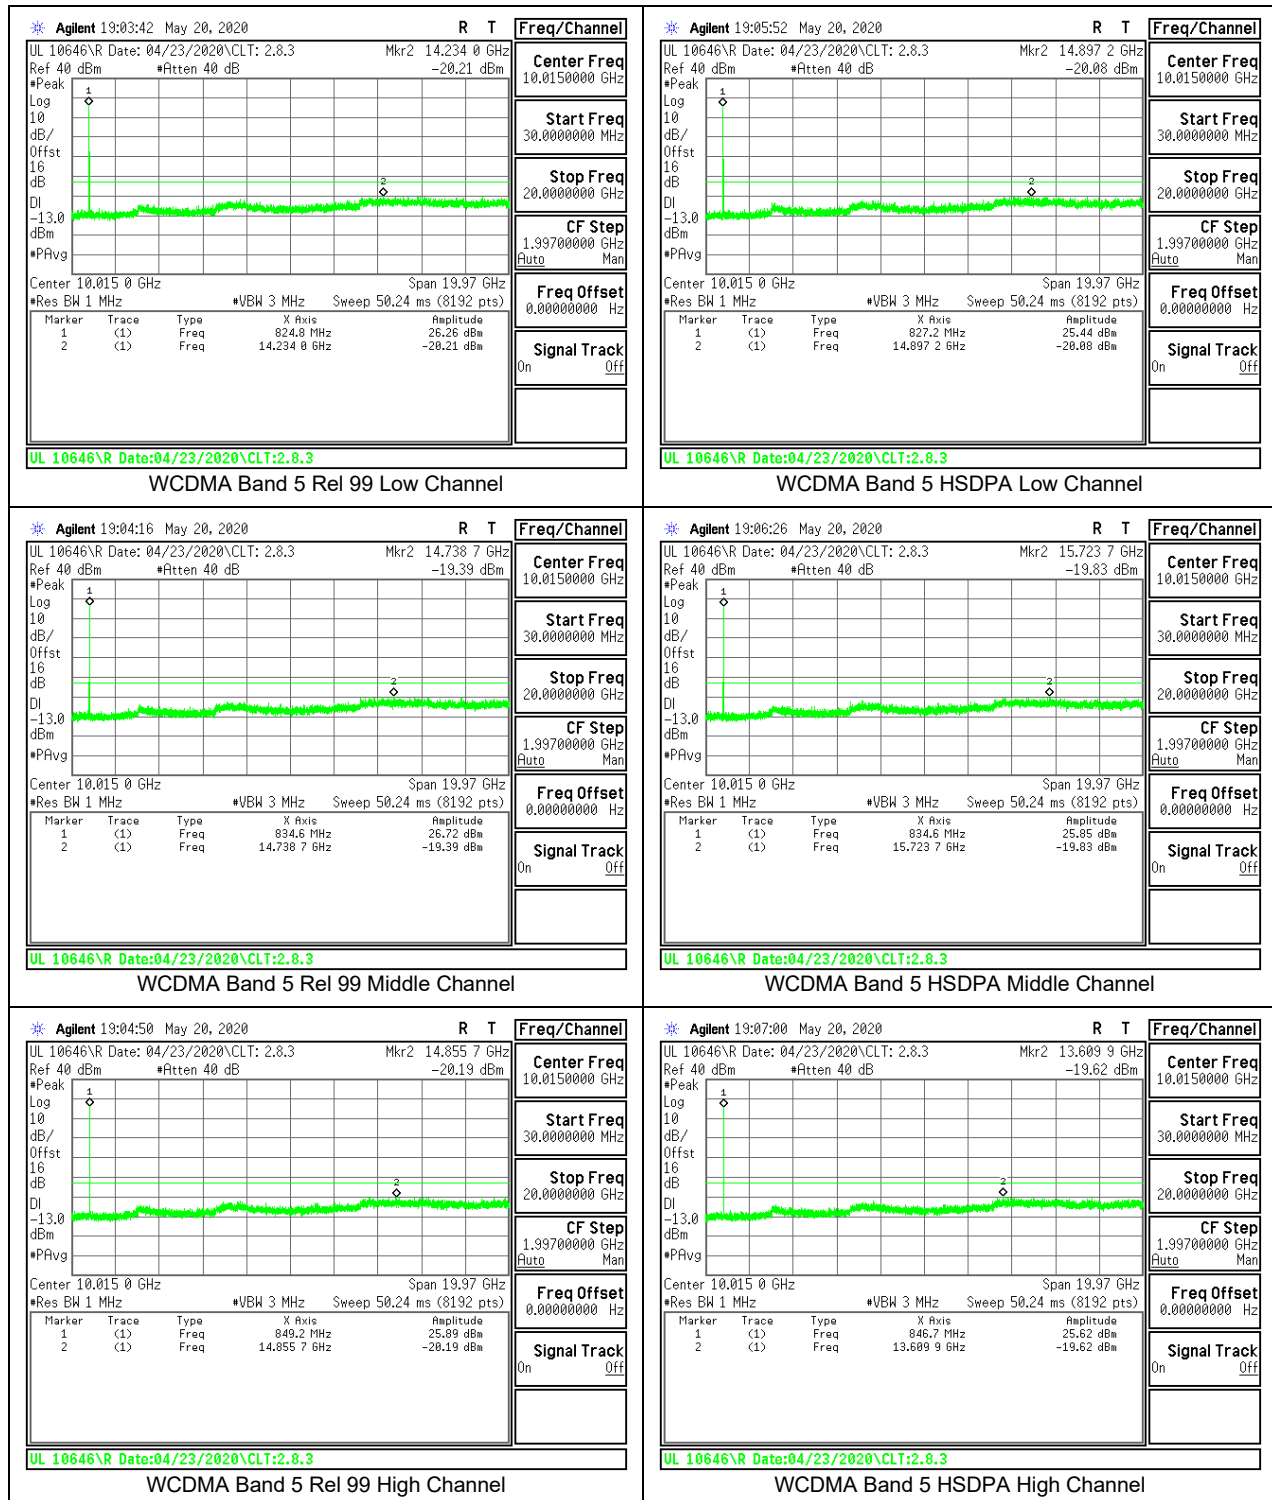

8.3.7. WCDMA BAND 2

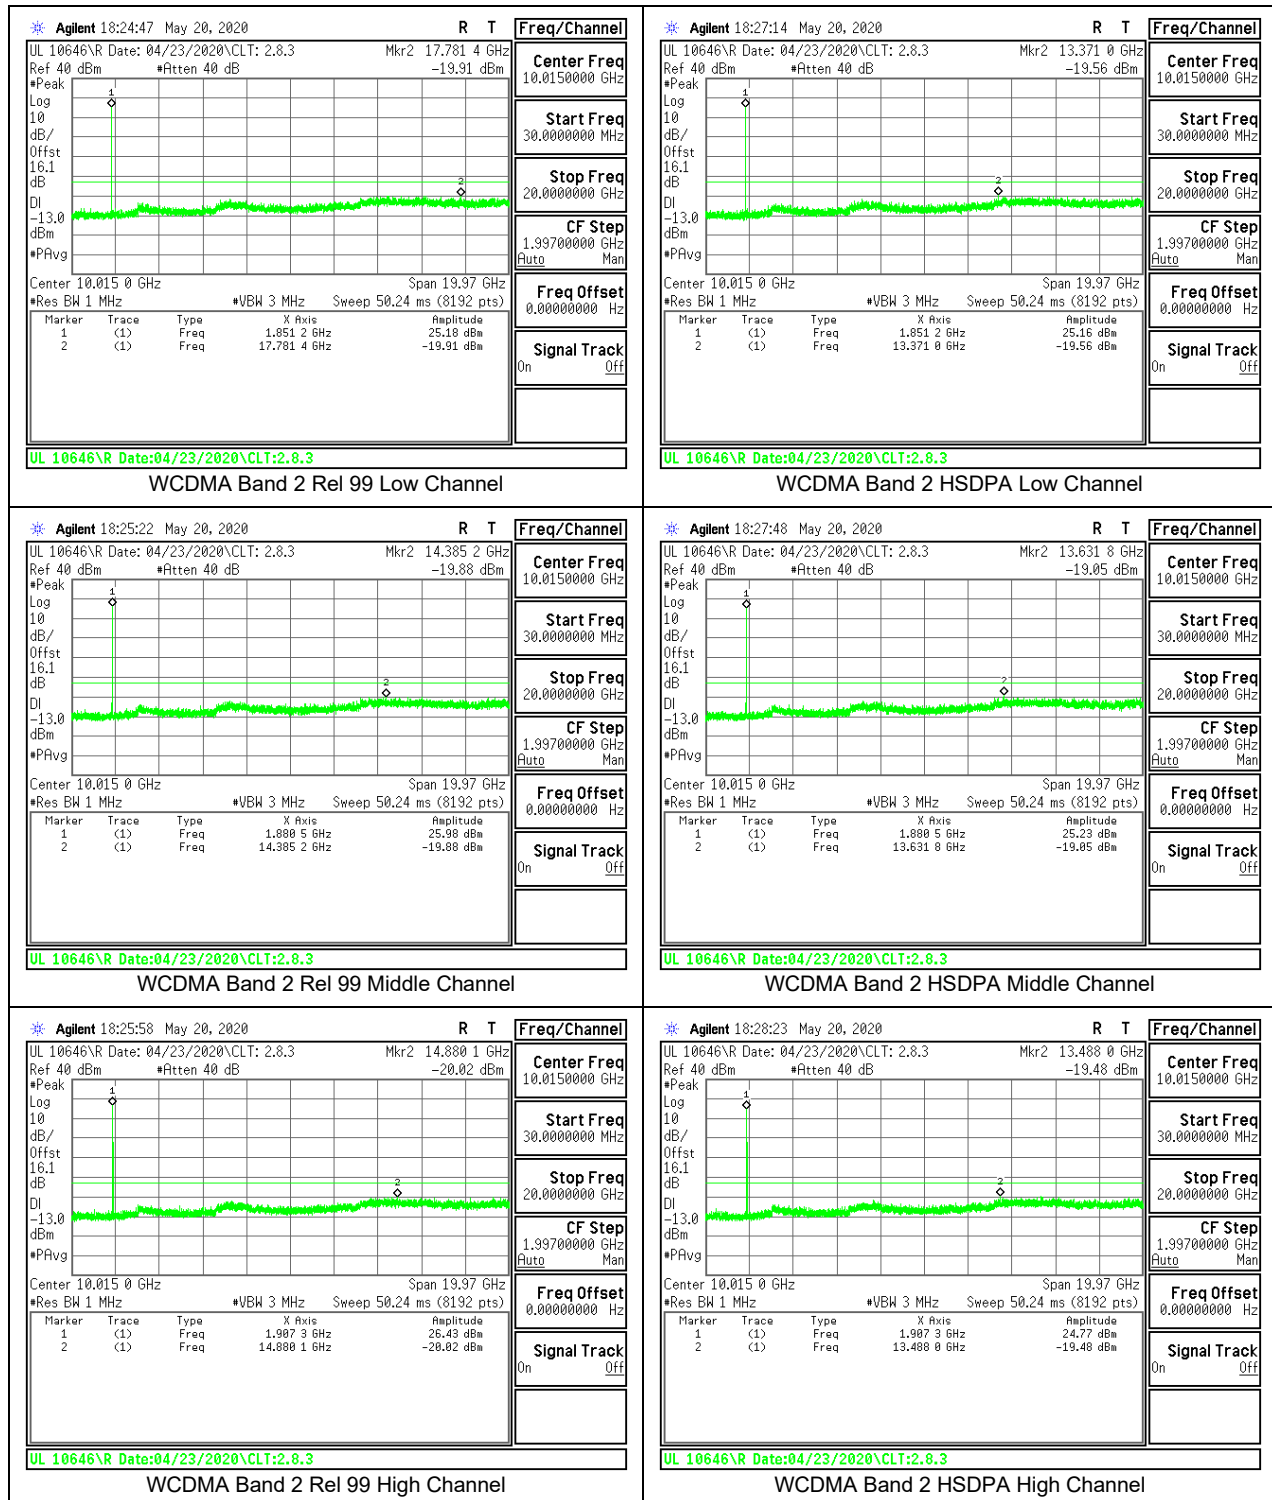

8.3.8. WCDMA BAND 4

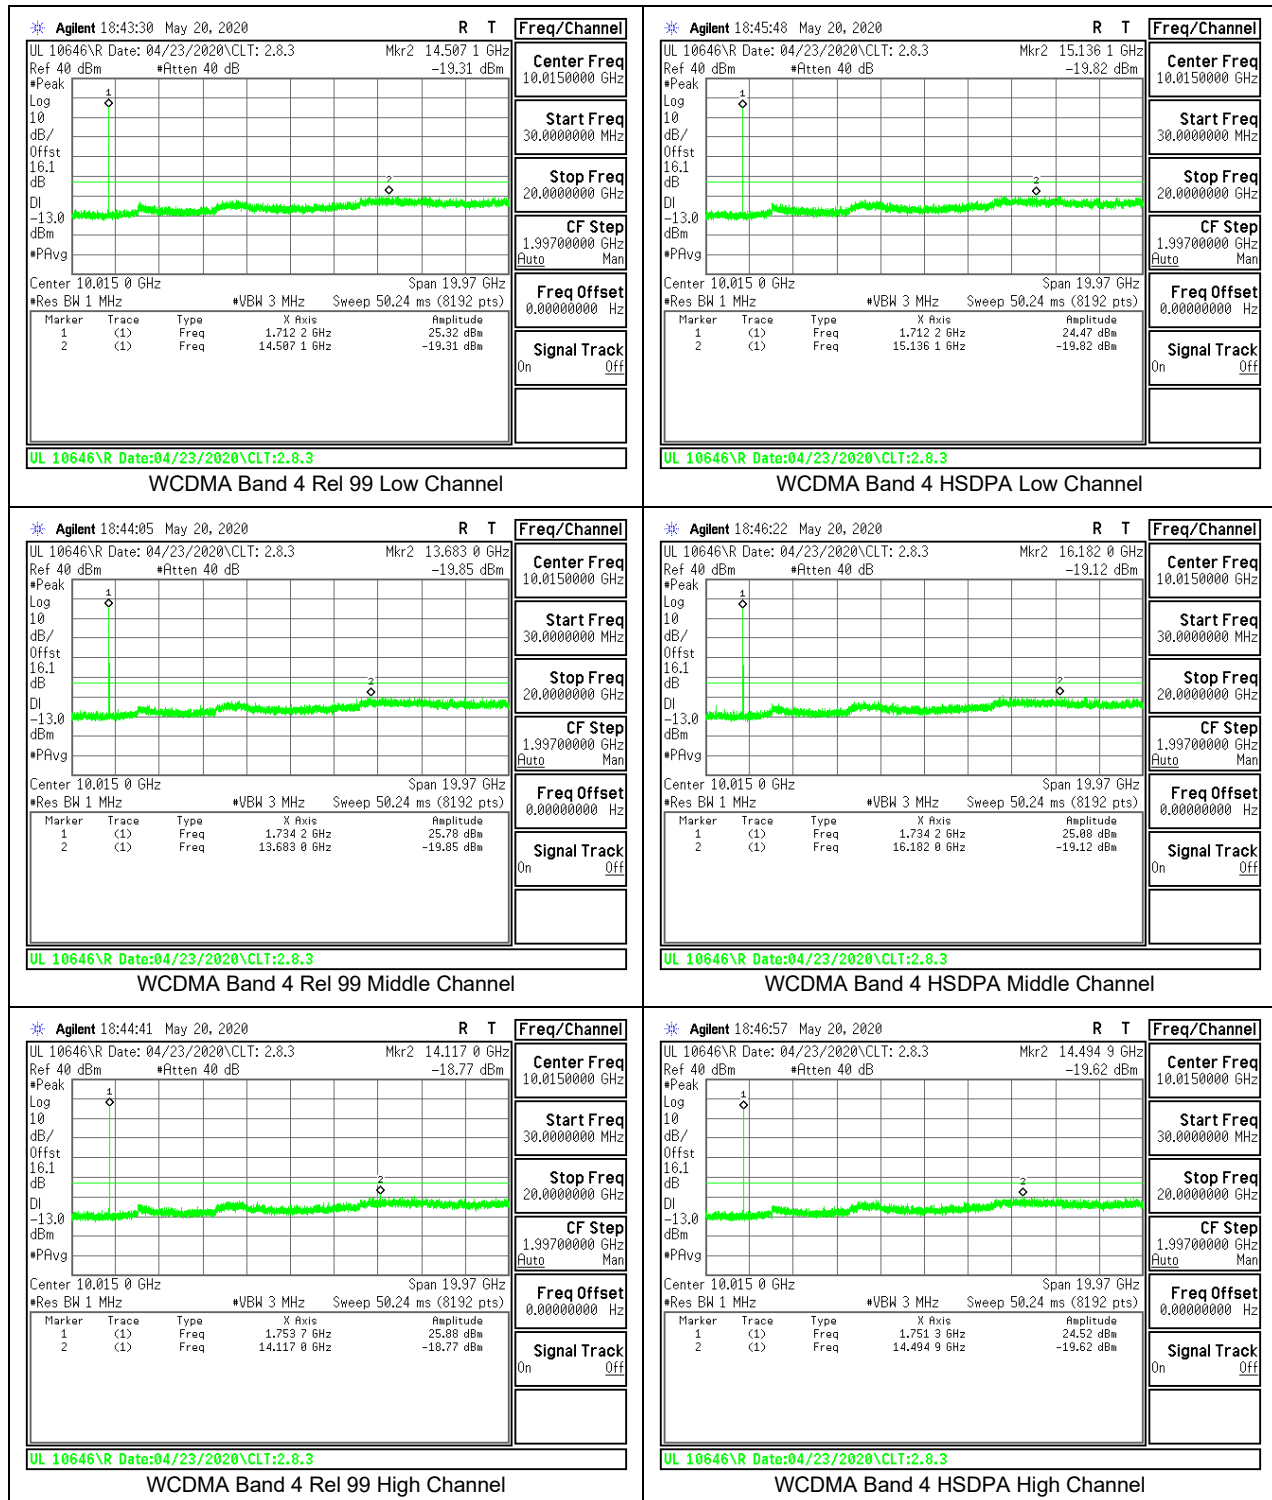

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213
ISED: RSS132§5.3; RSS133§6.3 and RSS139§6.4

LIMITS

FCC §22.355, §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS132§5.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 SRSP for mobile stations and ± 1.5 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the occupied bandwidth stays within each of the sub-bands (see Section 5.1) when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS133§6.3

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS139§6.4

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

See the following pages.

8.4.1. GSM

Test Engineer ID:	19178	Test Date:	6/19/2020
-------------------	-------	------------	-----------

GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	824.0604	848.9487		
Extreme (50C)		824.0604	848.9487	7.3	0.009
Extreme (40C)		824.0604	848.9487	9.5	0.011
Extreme (30C)		824.0604	848.9487	14.4	0.017
Extreme (10C)		824.0604	848.9487	15.3	0.018
Extreme (0C)		824.0604	848.9487	7.6	0.009
Extreme (-10C)		824.0604	848.9487	12.4	0.015
Extreme (-20C)		824.0604	848.9487	14.5	0.017
Extreme (-30C)		824.0604	848.9487	19.5	0.023
20C	15%	824.0604	848.9487	14.6	0.017
	-15%	824.0604	848.9487	14.9	0.018
	End Point	824.0604	848.9487	16.5	0.020

ID:	19178	Date:	6/19/20
-----	-------	-------	---------

GPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.0209	1909.8741		
Extreme (50C)		1850.0209	1909.8741	26.9	0.014
Extreme (40C)		1850.0209	1909.8741	15.1	0.008
Extreme (30C)		1850.0209	1909.8741	31.7	0.017
Extreme (10C)		1850.0209	1909.8741	27.4	0.015
Extreme (0C)		1850.0209	1909.8741	31.0	0.016
Extreme (-10C)		1850.0209	1909.8741	24.4	0.013
Extreme (-20C)		1850.0209	1909.8741	27.8	0.015
Extreme (-30C)		1850.0209	1909.8741	41.4	0.022
20C	15%	1850.0209	1909.8741	24.5	0.013
	-15%	1850.0209	1909.8741	23.9	0.013
	End Point	1850.0209	1909.8741	23.2	0.012

8.4.2. CDMA

Test Engineer ID:	38602	Test Date:	7/31/2020
-------------------	-------	------------	-----------

CDMA 1xRTT BC10

Limit		816.35	823.65	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	816.5728	823.4736		
Extreme (50C)		816.5728	823.4736	-4.7	-0.01
Extreme (40C)		816.5728	823.4736	1.1	0.00
Extreme (30C)		816.5728	823.4736	2.2	0.00
Extreme (10C)		816.5728	823.4736	3.7	0.00
Extreme (0C)		816.5728	823.4736	4.4	0.01
Extreme (-10C)		816.5728	823.4736	4.8	0.01
Extreme (-20C)		816.5728	823.4736	5.5	0.01
Extreme (-30C)		816.5728	823.4736	6.1	0.01
20C	15%	816.5728	823.4736	1.9	0.00
	-15%	816.5728	823.4736	1.5	0.00
	End Point	816.5728	823.4736	1.7	0.00

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.0244	848.9870		
Extreme (50C)		824.0244	848.9870	-2.5	-0.003
Extreme (40C)		824.0244	848.9870	1.8	0.002
Extreme (30C)		824.0244	848.9870	2.7	0.003
Extreme (10C)		824.0244	848.9870	5.2	0.006
Extreme (0C)		824.0244	848.9870	5.4	0.006
Extreme (-10C)		824.0244	848.9870	4.3	0.005
Extreme (-20C)		824.0244	848.9870	5.5	0.007
Extreme (-30C)		824.0244	848.9870	6.7	0.008
20C	15%	824.0244	848.9870	2.6	0.003
	-15%	824.0244	848.9870	4.4	0.005
	End Point	824.0244	848.9870	3.1	0.004

CDMA 1xRTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.5703	1909.4272		
Extreme (50C)		1850.5703	1909.4272	8.4	0.004
Extreme (40C)		1850.5703	1909.4272	9.6	0.005
Extreme (30C)		1850.5703	1909.4272	8.2	0.004
Extreme (10C)		1850.5703	1909.4272	11.4	0.006
Extreme (0C)		1850.5703	1909.4272	12.8	0.007
Extreme (-10C)		1850.5703	1909.4272	13.5	0.007
Extreme (-20C)		1850.5703	1909.4272	15.1	0.008
Extreme (-30C)		1850.5703	1909.4272	15.5	0.008
20C	15%	1850.5703	1909.4272	8.5	0.005
	-15%	1850.5703	1909.4272	9.7	0.005
	End Point	1850.5703	1909.4272	10.3	0.005

8.4.3. WCDMA

Test Engineer ID:	19178	Test Date:	6/25/2020
-------------------	-------	------------	-----------

UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	824.1493	848.2444		
Extreme (50C)		824.1493	848.2444	-4.7	-0.006
Extreme (40C)		824.1493	848.2444	-4.0	-0.005
Extreme (30C)		824.1493	848.2444	-2.8	-0.003
Extreme (10C)		824.1493	848.2444	-3.2	-0.004
Extreme (0C)		824.1493	848.2444	1.4	0.002
Extreme (-10C)		824.1493	848.2444	-3.5	-0.004
Extreme (-20C)		824.1493	848.2444	-4.6	-0.005
Extreme (-30C)		824.1493	848.2444	-4.9	-0.006
20C	15%	824.1493	848.2444	1.5	0.002
	-15%	824.1493	848.2444	-0.8	-0.001
	End Point	824.1493	848.2444	2.6	0.003

UMTS REL99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.1095	1909.2881		
Extreme (50C)		1850.1095	1909.2882	9.3	0.005
Extreme (40C)		1850.1095	1909.2881	5.5	0.003
Extreme (30C)		1850.1095	1909.2881	3.2	0.002
Extreme (10C)		1850.1095	1909.2881	1.2	0.001
Extreme (0C)		1850.1095	1909.2881	0.8	0.000
Extreme (-10C)		1850.1095	1909.2881	3.9	0.002
Extreme (-20C)		1850.1095	1909.2881	2.5	0.001
Extreme (-30C)		1850.1095	1909.2881	3.1	0.002
20C	15%	1850.1095	1909.2881	4.4	0.002
	-15%	1850.1095	1909.2881	-3.8	-0.002
	End Point	1850.1095	1909.2881	1.3	0.001

UMTS REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.1571	1754.3001		
Extreme (50C)		1710.1571	1754.3001	8.6	0.005
Extreme (40C)		1710.1571	1754.3001	7.7	0.004
Extreme (30C)		1710.1571	1754.3001	6.0	0.003
Extreme (10C)		1710.1571	1754.3001	7.3	0.004
Extreme (0C)		1710.1571	1754.3001	-9.1	-0.005
Extreme (-10C)		1710.1571	1754.3001	-6.8	-0.004
Extreme (-20C)		1710.1571	1754.3001	5.4	0.003
Extreme (-30C)		1710.1571	1754.3001	-7.3	-0.004
20C	15%	1710.1571	1754.3001	1.4	0.001
	-15%	1710.1571	1754.3001	-6.7	-0.004
	End Point	1710.1571	1754.3001	1.5	0.001

8.5. PEAK-TO-AVERAGE POWER RATIO

LIMIT


In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT


Ant 1 was used to measure as the worst case. The results from all CCDF plots are passed with 13dB peak-to-average power ratio criteria.

Test Engineer ID:	20769	Test Date:	5/20/2020 – 8/25/2020
--------------------------	-------	-------------------	-----------------------

8.5.1. GSM

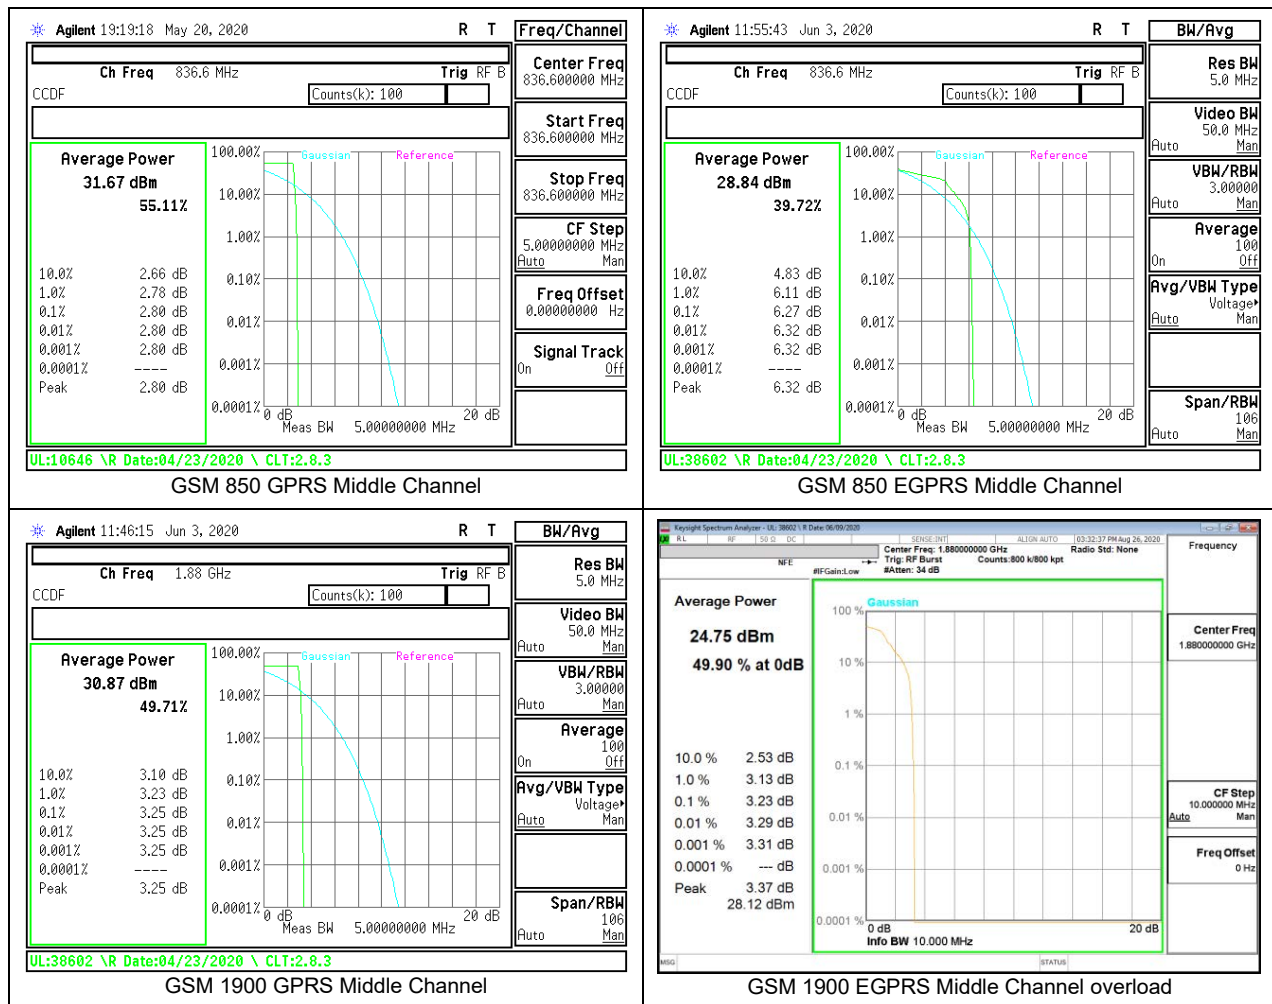

8.5.2. CDMA

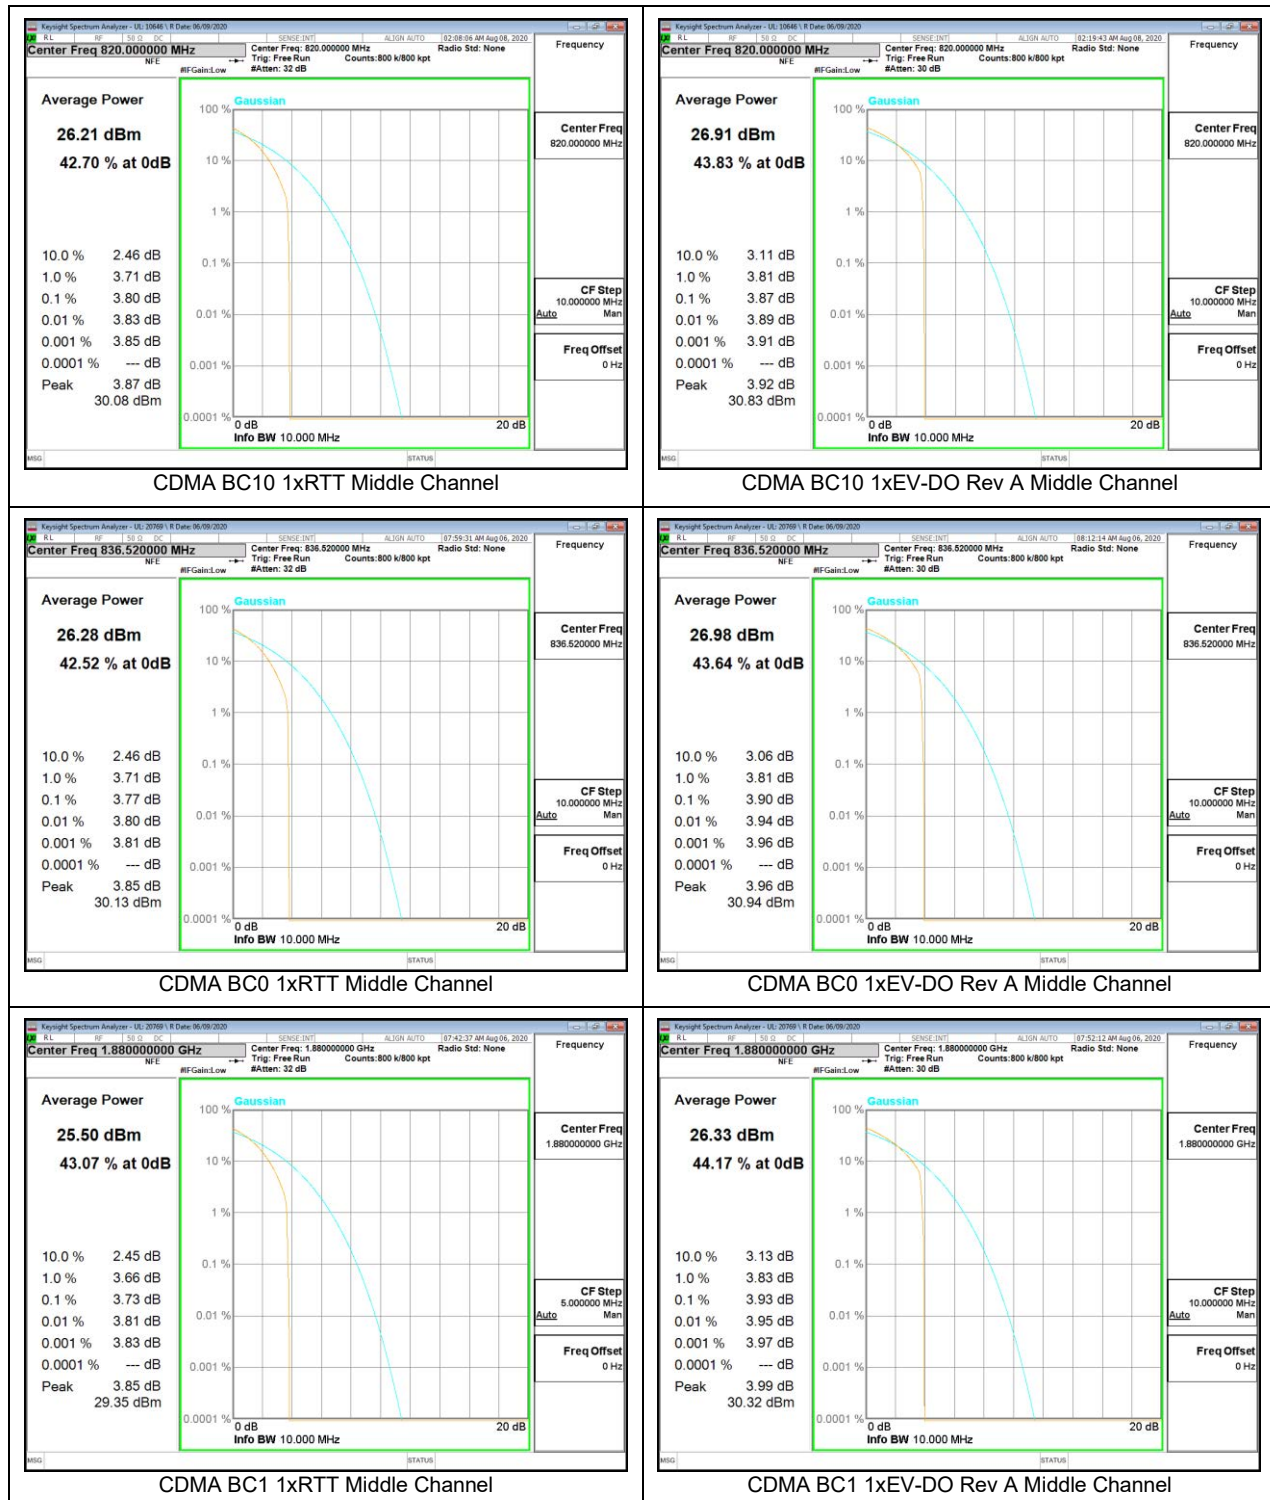

8.5.3. WCDMA



9. RADIATED TEST RESULTS

Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, We measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement method.

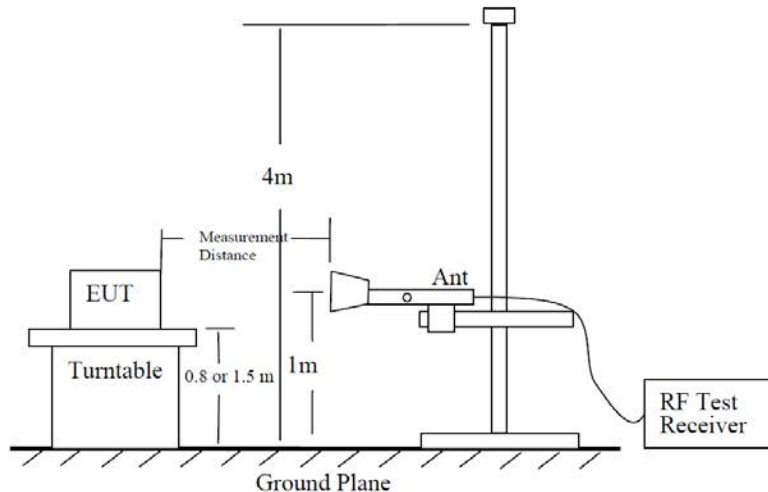


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.


So, from d)

The measuring distance is usually at 3m, then $20 \cdot \log(3) = 9.5424$

Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

Note that: we do confidence check to our chambers every day to see if any degradation from expected/normal reading reference data. Also we do ambient check to all our chambers every month.

9.1. Example Plot

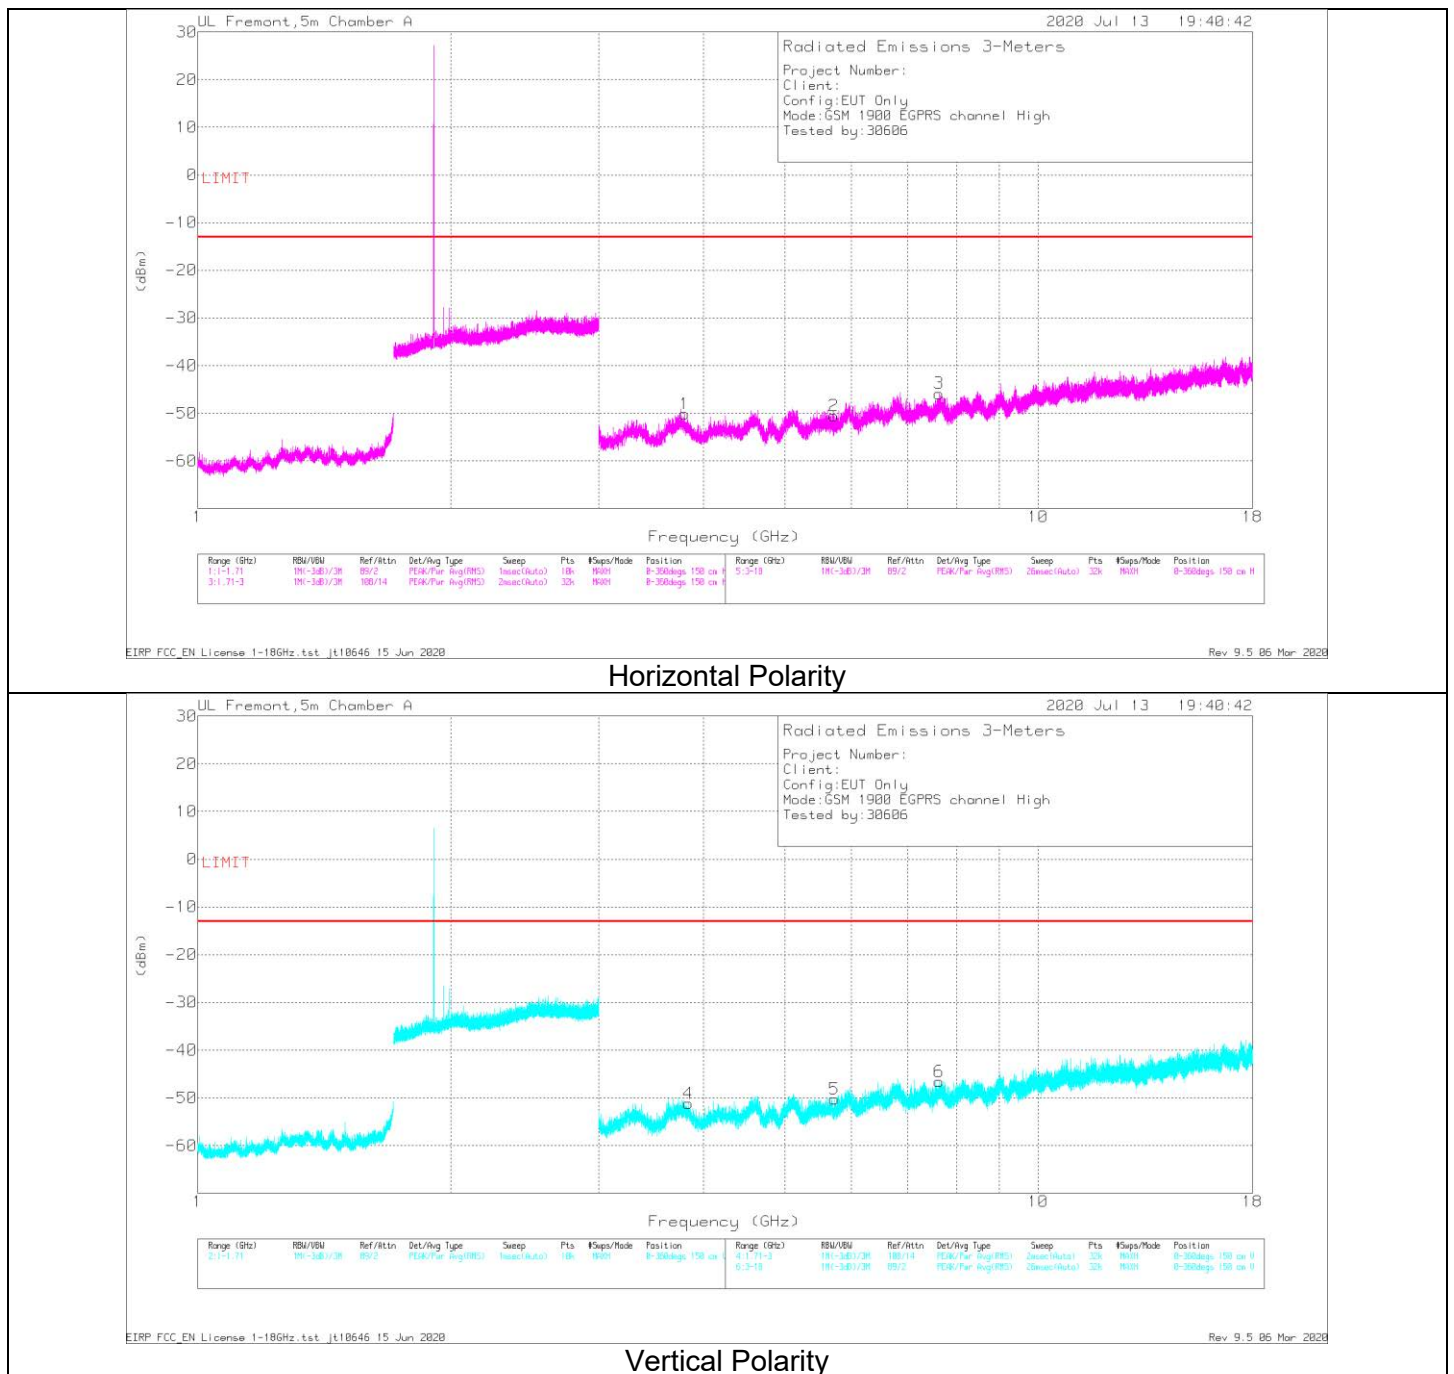

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
1	3.79969	38.82	Pk	33.7	-27.4	1	-95.2	-49.08	-13	-36.08	H
4	3.83391	38.48	Pk	33.7	-28.1	1	-95.2	-50.12	-13	-37.12	V
2	5.715	36.33	Pk	35.3	-27	1	-95.2	-49.57	-13	-36.57	H
5	5.72625	36.87	Pk	35.2	-27.1	1	-95.2	-49.23	-13	-36.23	V
3	7.62141	34.75	Pk	35.9	-21.3	1	-95.2	-44.85	-13	-31.85	H
6	7.62563	34.03	Pk	35.9	-21.3	1	-95.2	-45.57	-13	-32.57	V

Pk - Peak detector

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
1	3.80434	40.23	Pk	33.7	-27.5	1	-95.2	-47.77	-13	-34.77	H
4	3.83388	40.13	Pk	33.7	-28.1	1	-95.2	-48.47	-13	-35.47	V
2	5.71616	37.63	Pk	35.3	-27	1	-95.2	-48.27	-13	-35.27	H
5	5.72948	39.24	Pk	35.2	-27.1	1	-95.2	-46.86	-13	-33.86	V
3	7.62142	35.89	Pk	35.9	-21.3	1	-95.2	-43.71	-13	-30.71	V
6	7.62538	36.2	Pk	35.9	-21.3	1	-95.2	-43.4	-13	-30.4	H

Pk - Peak detector

9.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT1

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691.
ISED: RSS132§5.5; RSS133§6.5 and RSS139§6.6

LIMIT

FCC: §22.917(a), §24.238(a), §27.53 (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

- (i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

- (i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS139§6.6

- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote 2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

TEST PROCEDURE

KDB 971168 D01

RESULTS

9.2.1. GSM 850

GPRS MODE

Project #:	13259315
Date:	7/14/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode:	GPRS GSM850
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.66079	41.59	Pk	29	-32.3	.8	-95.2	-56.11	-13	-43.11	H
2.47277	44.76	Pk	33.3	-31.4	.5	-95.2	-48.04	-13	-35.04	H
3.27522	40.19	Pk	33.1	-30.2	.7	-95.2	-51.41	-13	-38.41	H
1.64193	41.62	Pk	29.1	-32.5	.7	-95.2	-56.28	-13	-43.28	V
2.47259	41.09	Pk	33.3	-31.4	.5	-95.2	-51.71	-13	-38.71	V
3.2915	40.32	Pk	33	-30.1	.8	-95.2	-51.18	-13	-38.18	V
Mid Channel, 836.6 MHz										
1.67645	42	Pk	29	-32.2	.7	-95.2	-55.7	-13	-42.7	H
2.51023	44.41	Pk	33.4	-31.4	.7	-95.2	-48.09	-13	-35.09	H
3.38308	40.75	Pk	33	-30.2	.6	-95.2	-51.05	-13	-38.05	H
1.68206	41.68	Pk	28.9	-32.2	.7	-95.2	-56.12	-13	-43.12	V
2.50979	42.75	Pk	33.4	-31.4	.7	-95.2	-49.75	-13	-36.75	V
3.35231	40.42	Pk	33	-30.1	.6	-95.2	-51.28	-13	-38.28	V
High Channel, 848.8 MHz										
1.6877	42.04	Pk	29.1	-32.2	.7	-95.2	-55.56	-13	-42.56	H
2.54635	42.73	Pk	33.3	-31	.7	-95.2	-49.47	-13	-36.47	H
3.38671	40.62	Pk	33	-30.2	.6	-95.2	-51.18	-13	-38.18	H
1.69132	42.13	Pk	29.1	-32.2	.7	-95.2	-55.47	-13	-42.47	V
2.55879	40.84	Pk	33.2	-31	.5	-95.2	-51.66	-13	-38.66	V
3.3827	40.65	Pk	33	-30.2	.6	-95.2	-51.15	-13	-38.15	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	7/14/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode:	EGPRS GSM850
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.64103	41.69	Pk	29.1	-32.5	.7	-95.2	-56.21	-13	-43.21	H
2.46976	40.92	Pk	33.3	-31.4	.5	-95.2	-51.88	-13	-38.88	H
3.30434	40.44	Pk	32.9	-30.1	.7	-95.2	-51.26	-13	-38.26	H
1.6377	41.66	Pk	29	-32.5	.7	-95.2	-56.34	-13	-43.34	V
2.4854	40.09	Pk	33.4	-31.3	.5	-95.2	-52.51	-13	-39.51	V
3.28173	40.07	Pk	33.1	-30.2	.8	-95.2	-51.43	-13	-38.43	V
Mid Channel, 836.6 MHz										
1.66043	41.32	Pk	29	-32.3	.8	-95.2	-56.38	-13	-43.38	H
2.50963	42.02	Pk	33.5	-31.4	.7	-95.2	-50.38	-13	-37.38	H
3.34978	39.83	Pk	33	-30.1	.6	-95.2	-51.87	-13	-38.87	H
1.66582	40.62	Pk	28.9	-32.2	.8	-95.2	-57.08	-13	-44.08	V
2.49761	40.65	Pk	33.5	-31.4	.6	-95.2	-51.85	-13	-38.85	V
3.35218	40.22	Pk	33	-30.1	.6	-95.2	-51.48	-13	-38.48	V
High Channel, 848.8 MHz										
1.69044	41.83	Pk	29.1	-32.2	.7	-95.2	-55.77	-13	-42.77	H
2.54638	46.01	Pk	33.3	-31	.7	-95.2	-46.19	-13	-33.19	H
3.38924	40.31	Pk	33	-30.2	.6	-95.2	-51.49	-13	-38.49	H
1.70286	40.69	Pk	29.4	-32.3	.6	-95.2	-56.81	-13	-43.81	V
2.55625	40.42	Pk	33.1	-31	.6	-95.2	-52.08	-13	-39.08	V
3.40649	39.87	Pk	33	-30.1	.6	-95.2	-51.83	-13	-38.83	V

Pk – Peak Detector

9.2.2. GSM 1900

GPRS MODE

Project #:	13259315
Date:	4/9/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.67726	40.07	Pk	33.2	-30.2	1	-95.2	-51.13	-13	-38.13	H
5.57381	39.43	Pk	34.8	-27.9	1	-95.2	-47.87	-13	-34.87	H
7.33374	36.64	Pk	35.8	-24.6	1	-95.2	-46.36	-13	-33.36	H
3.70014	40.94	Pk	33.2	-30.1	1	-95.2	-50.16	-13	-37.16	V
5.53095	39.17	Pk	34.8	-28.2	1	-95.2	-48.43	-13	-35.43	V
7.56296	36.53	Pk	35.7	-24.6	1	-95.2	-46.57	-13	-33.57	V
Mid Channel, 1880MHz										
3.76599	40.7	Pk	33.6	-30.1	1	-95.2	-50	-13	-37	H
5.64155	39.08	Pk	34.9	-28	1	-95.2	-48.22	-13	-35.22	H
7.51571	36.36	Pk	35.7	-24.4	1	-95.2	-46.54	-13	-33.54	H
3.94215	40.46	Pk	33.5	-29.8	1	-95.2	-50.04	-13	-37.04	V
5.22778	39.22	Pk	34.7	-28.8	1	-95.2	-49.08	-13	-36.08	V
7.28665	37.59	Pk	35.8	-24.4	1	-95.2	-45.21	-13	-32.21	V
High Channel, 1909.8MHz										
3.82483	41.27	Pk	33.7	-29.9	1	-95.2	-49.13	-13	-36.13	H
5.56838	39.35	Pk	34.9	-27.9	1	-95.2	-47.85	-13	-34.85	H
7.5595	36.8	Pk	35.7	-24.6	1	-95.2	-46.3	-13	-33.3	H
3.83192	41.26	Pk	33.7	-29.8	1	-95.2	-49.04	-13	-36.04	V
5.42983	39.12	Pk	34.9	-28.5	1	-95.2	-48.68	-13	-35.68	V
7.54086	37.04	Pk	35.7	-24.7	1	-95.2	-46.16	-13	-33.16	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	7/13/2020
Test Engineer:	30606
Configuration:	EUT Only
Mode:	GSM 1900 EGPRS LOW
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.72287	40.41	Pk	33.4	-27.2	1	-95.2	-47.59	-13	-34.59	H
5.5509	40.88	Pk	35	-26.6	1	-95.2	-44.92	-13	-31.92	H
7.39182	35.99	Pk	36.1	-23	1	-95.2	-45.11	-13	-32.11	H
3.71056	40.23	Pk	33.5	-27.4	1	-95.2	-47.87	-13	-34.87	V
5.55058	39.39	Pk	35	-26.6	1	-95.2	-46.41	-13	-33.41	V
7.38051	36.51	Pk	36.2	-22.8	1	-95.2	-44.29	-13	-31.29	V
Mid Channel, 1880MHz										
3.77188	40.61	Pk	33.6	-27.1	1	-95.2	-47.09	-13	-34.09	H
5.61624	38.94	Pk	35.1	-26.4	1	-95.2	-46.56	-13	-33.56	H
7.52603	36.71	Pk	36	-23.2	1	-95.2	-44.69	-13	-31.69	H
3.74038	40.06	Pk	33.5	-27.1	1	-95.2	-47.74	-13	-34.74	V
5.64006	40.28	Pk	35.1	-26.4	1	-95.2	-45.22	-13	-32.22	V
7.50291	36.83	Pk	36	-23.5	1	-95.2	-44.87	-13	-31.87	V
High Channel, 1909.8MHz										
3.80434	40.23	Pk	33.7	-27.5	1	-95.2	-47.77	-13	-34.77	H
5.71616	37.63	Pk	35.3	-27	1	-95.2	-48.27	-13	-35.27	H
7.62538	36.2	Pk	35.9	-21.3	1	-95.2	-43.4	-13	-30.4	H
3.83388	40.13	Pk	33.7	-28.1	1	-95.2	-48.47	-13	-35.47	V
5.72948	39.24	Pk	35.2	-27.1	1	-95.2	-46.86	-13	-33.86	V
7.62142	35.89	Pk	35.9	-21.3	1	-95.2	-43.71	-13	-30.71	V

Pk – Peak Detector

9.2.3. CDMA BC10

1xRTT MODE

Project #:	13259315
Date:	7/29/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	1xRTT BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.98541	41.08	Pk	27.4	-29.9	.6	-95.2	-56.02	-13	-43.02	H
2.67849	39.98	Pk	29.2	-29	.6	-95.2	-54.42	-13	-41.42	H
4.27271	38	Pk	31.7	-27	.6	-95.2	-51.9	-13	-38.9	H
1.85674	41.56	Pk	26	-30.1	.6	-95.2	-57.14	-13	-44.14	V
2.49684	40.15	Pk	29	-29.2	.6	-95.2	-54.65	-13	-41.65	V
3.97266	39.58	Pk	31.6	-27.7	.6	-95.2	-51.12	-13	-38.12	V
Mid Channel, 820MHz										
1.57183	42.29	Pk	24.9	-30.5	.9	-95.2	-57.61	-13	-44.61	H
1.97107	40.47	Pk	27.1	-30	.6	-95.2	-57.03	-13	-44.03	H
3.26433	39.26	Pk	31.4	-28.3	.6	-95.2	-52.24	-13	-39.24	H
1.54623	40.32	Pk	24.8	-30.6	.8	-95.2	-59.88	-13	-46.88	V
1.97731	40.37	Pk	27.3	-29.9	.6	-95.2	-56.83	-13	-43.83	V
3.32631	39.38	Pk	31.1	-28.2	.6	-95.2	-52.32	-13	-39.32	V
High Channel, 822.75MHz										
1.81094	41.34	Pk	25.9	-30.2	.6	-95.2	-57.56	-13	-44.56	H
2.61828	40.18	Pk	29.2	-29.1	.6	-95.2	-54.32	-13	-41.32	H
3.78843	40.07	Pk	30.8	-27.8	.6	-95.2	-51.53	-13	-38.53	H
1.86967	43.37	Pk	26.1	-30	.6	-95.2	-55.13	-13	-42.13	V
2.73659	39.3	Pk	28.9	-28.9	.6	-95.2	-55.3	-13	-42.3	V
3.79774	39.42	Pk	30.9	-27.8	.7	-95.2	-51.98	-13	-38.98	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/9/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.65419	41.15	Pk	24.9	-30.4	.8	-95.2	-58.75	-13	-45.75	H
2.45301	47.5	Pk	28.8	-29.4	.5	-95.2	-47.8	-13	-34.8	H
3.32166	38.22	Pk	31.2	-28.1	.6	-95.2	-53.28	-13	-40.28	H
1.64572	41.49	Pk	24.9	-30.5	.7	-95.2	-58.61	-13	-45.61	V
2.45083	44.71	Pk	28.8	-29.4	.5	-95.2	-50.59	-13	-37.59	V
3.34946	38.63	Pk	31	-28.2	.6	-95.2	-53.17	-13	-40.17	V
Mid Channel, 820MHz										
1.65534	41	Pk	25	-30.4	.8	-95.2	-58.8	-13	-45.8	H
2.46096	50.14	Pk	28.9	-29.3	.5	-95.2	-44.96	-13	-31.96	H
3.29448	38.82	Pk	31.2	-27.9	.8	-95.2	-52.28	-13	-39.28	H
1.67888	39.48	Pk	24.9	-30.4	.7	-95.2	-60.52	-13	-47.52	V
2.45889	46.49	Pk	28.9	-29.4	.5	-95.2	-48.71	-13	-35.71	V
3.283	38.6	Pk	31.3	-28.1	.8	-95.2	-52.6	-13	-39.6	V
High Channel, 822.75MHz										
1.587	42.14	Pk	24.9	-30.6	.8	-95.2	-57.96	-13	-44.96	H
2.46834	46.92	Pk	28.9	-29.4	.5	-95.2	-48.28	-13	-35.28	H
3.80703	38.73	Pk	30.9	-27.8	.8	-95.2	-52.57	-13	-39.57	H
1.57637	41.25	Pk	24.9	-30.5	.9	-95.2	-58.65	-13	-45.65	V
2.4675	42.92	Pk	28.9	-29.4	.5	-95.2	-52.28	-13	-39.28	V
3.77985	39.45	Pk	30.8	-27.8	.5	-95.2	-52.25	-13	-39.25	V

Pk – Peak Detector

9.2.4. CDMA BC0

1xRTT MODE

Project #:	13259315
Date:	7/10/2020
Test Engineer:	19480
Configuration:	EUT Only
Mode:	1xRTT BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.64884	41.38	Pk	24.9	-30.4	.8	-95.2	-58.52	-13	-45.52	H
2.47461	40.1	Pk	29	-29.3	.5	-95.2	-54.9	-13	-41.9	H
3.29459	37.71	Pk	31.2	-27.9	.8	-95.2	-53.39	-13	-40.39	H
1.64901	40.33	Pk	24.9	-30.4	.8	-95.2	-59.57	-13	-46.57	V
2.47782	38.69	Pk	29	-29.3	.5	-95.2	-56.31	-13	-43.31	V
3.29595	37.62	Pk	31.2	-27.9	.8	-95.2	-53.48	-13	-40.48	V
Mid Channel, 836.52MHz										
1.67353	45.65	Pk	25	-30.4	.7	-95.2	-54.25	-13	-41.25	H
2.50921	45.88	Pk	29.1	-29.3	.7	-95.2	-48.82	-13	-35.82	H
3.34453	37.66	Pk	31	-28.2	.6	-95.2	-54.14	-13	-41.14	H
1.67405	43.71	Pk	25	-30.4	.7	-95.2	-56.19	-13	-43.19	V
2.50874	42.12	Pk	29.1	-29.3	.7	-95.2	-52.58	-13	-39.58	V
3.34567	37.58	Pk	30.9	-28.2	.6	-95.2	-54.32	-13	-41.32	V
High Channel, 848.31MHz										
1.69717	40.84	Pk	25	-30.4	.7	-95.2	-59.06	-13	-46.06	H
2.54424	44.77	Pk	29.2	-29.2	.7	-95.2	-49.73	-13	-36.73	H
3.39264	39.17	Pk	30.7	-28.2	.6	-95.2	-52.93	-13	-39.93	H
1.69666	41.75	Pk	25	-30.4	.7	-95.2	-58.15	-13	-45.15	V
2.54774	40.11	Pk	29.3	-29.3	.7	-95.2	-54.39	-13	-41.39	V
3.3941	39.18	Pk	30.7	-28.2	.6	-95.2	-52.92	-13	-39.92	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/8/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.80368	40.25	Pk	25.9	-30.2	.6	-95.2	-58.65	-13	-45.65	H
2.47432	42.25	Pk	29	-29.3	.5	-95.2	-52.75	-13	-39.75	H
3.23586	38.66	Pk	31.4	-28.3	.4	-95.2	-53.04	-13	-40.04	H
1.81797	40.92	Pk	25.9	-30.1	.6	-95.2	-57.88	-13	-44.88	V
2.47513	48.59	Pk	29	-29.3	.5	-95.2	-46.41	-13	-33.41	V
3.28314	39.61	Pk	31.3	-28.1	.8	-95.2	-51.59	-13	-38.59	V
Mid Channel, 836.52MHz										
1.66038	40.12	Pk	25	-30.4	.8	-95.2	-59.68	-13	-46.68	H
2.51149	30.57	Pk	29.1	-29.3	.7	-95.2	-64.13	-13	-51.13	H
3.32571	38.03	Pk	31.1	-28.1	.6	-95.2	-53.57	-13	-40.57	H
1.64505	40.85	Pk	25	-30.5	.7	-95.2	-59.15	-13	-46.15	V
2.50853	43.48	Pk	29.1	-29.3	.7	-95.2	-51.22	-13	-38.22	V
3.28706	38.66	Pk	31.2	-28	.8	-95.2	-52.54	-13	-39.54	V
High Channel, 848.31MHz										
1.75811	40.58	Pk	25.6	-30.3	.7	-95.2	-58.62	-13	-45.62	H
2.54394	47.85	Pk	29.2	-29.2	.7	-95.2	-46.65	-13	-33.65	H
3.29649	38.95	Pk	31.2	-27.9	.8	-95.2	-52.15	-13	-39.15	H
1.77961	40.35	Pk	25.9	-30.2	.6	-95.2	-58.55	-13	-45.55	V
2.54413	44.67	Pk	29.2	-29.2	.7	-95.2	-49.83	-13	-36.83	V
3.28198	38.48	Pk	31.4	-28.1	.8	-95.2	-52.62	-13	-39.62	V

Pk – Peak Detector

9.2.5. CDMA BC1

1xRTT MODE

Project #:	13259315
Date:	7/29/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	1xRTT BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
5.09939	37.94	Pk	33.9	-24.7	1	-95.2	-47.06	-13	-34.06	H
6.57027	35.79	Pk	35.4	-23.4	1	-95.2	-46.41	-13	-33.41	H
8.12417	35.12	Pk	37.2	-22.2	1	-95.2	-44.08	-13	-31.08	H
5.06233	37.18	Pk	33.9	-24.8	1	-95.2	-47.92	-13	-34.92	V
6.68708	37.09	Pk	35.7	-24.5	1	-95.2	-45.91	-13	-32.91	V
9.0831	35.18	Pk	38.7	-20.7	1	-95.2	-41.02	-13	-28.02	V
Mid Channel, 1880MHz										
4.98019	37.88	Pk	33.6	-25.8	1	-95.2	-48.52	-13	-35.52	H
7.00159	36.51	Pk	36.4	-24.1	1	-95.2	-45.39	-13	-32.39	H
9.0218	34.73	Pk	38.6	-20.3	1	-95.2	-41.17	-13	-28.17	H
4.87177	37.87	Pk	33.2	-26.1	1	-95.2	-49.23	-13	-36.23	V
6.71622	36.19	Pk	35.7	-24.7	1	-95.2	-47.01	-13	-34.01	V
10.44256	33.73	Pk	39.4	-18.9	1	-95.2	-39.97	-13	-26.97	V
High Channel, 1908.75MHz										
5.11844	37.56	Pk	33.9	-24.7	1	-95.2	-47.44	-13	-34.44	H
7.43401	35.23	Pk	36.9	-22.9	1	-95.2	-44.97	-13	-31.97	H
10.44915	34.17	Pk	39.4	-18.7	1	-95.2	-39.33	-13	-26.33	H
4.87861	37.9	Pk	33.3	-26.2	1	-95.2	-49.2	-13	-36.2	V
7.73754	35.73	Pk	37.1	-21.7	1	-95.2	-43.07	-13	-30.07	V
10.60318	33.84	Pk	39.5	-19.1	1	-95.2	-39.96	-13	-26.96	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/9/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
3.85111	38.87	Pk	31.1	-27.1	1	-95.2	-51.33	-13	-38.33	H
5.55461	39.5	Pk	33.3	-25.8	1	-95.2	-47.20	-13	-34.20	H
7.32332	36.19	Pk	37	-23.8	1	-95.2	-44.81	-13	-31.81	H
3.86353	38.75	Pk	31.2	-27.1	1	-95.2	-51.35	-13	-38.35	V
5.55874	37.55	Pk	33.2	-25.9	1	-95.2	-49.35	-13	-36.35	V
7.32176	36.24	Pk	37	-23.7	1	-95.2	-44.66	-13	-31.66	V
Mid Channel, 1880MHz										
3.90584	38.26	Pk	31.4	-26.8	1	-95.2	-51.34	-13	-38.34	H
5.64097	39.44	Pk	33.1	-24.8	1	-95.2	-46.46	-13	-33.46	H
7.58827	35.49	Pk	36.9	-23.3	1	-95.2	-45.11	-13	-32.11	H
3.88251	38.35	Pk	31.3	-27	1	-95.2	-51.55	-13	-38.55	V
5.61905	36.7	Pk	33.1	-25.1	1	-95.2	-49.5	-13	-36.5	V
7.80134	35.1	Pk	37.2	-21.9	1	-95.2	-43.8	-13	-30.8	V
High Channel, 1908.75MHz										
3.74336	38.91	Pk	30.5	-27.5	1	-95.2	-52.29	-13	-39.29	H
5.06177	37.5	Pk	33.9	-24.8	1	-95.2	-47.6	-13	-34.6	H
9.59146	34.67	Pk	38.9	-19.8	1	-95.2	-40.43	-13	-27.43	H
3.99377	38.12	Pk	31.6	-27.1	1	-95.2	-51.58	-13	-38.58	V
4.83317	39.23	Pk	33.1	-25.7	1	-95.2	-47.57	-13	-34.57	V
5.68529	36.21	Pk	33.1	-24.2	1	-95.2	-49.09	-13	-36.09	V

Pk – Peak Detector

9.2.6. WCDMA BAND 5

REL 99 MODE

Project #:	13259315
Date:	6/9/2020
Test Engineer:	19410
Configuration:	EUT Only
Mode:	REL99 Band 5
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.65112	40.91	Pk	24.9	-30.4	.8	-95.2	-58.99	-13	-45.99	H
2.4756	44.71	Pk	29	-29.3	.5	-95.2	-50.29	-13	-37.29	H
3.30598	38.21	Pk	31.1	-27.9	.8	-95.2	-52.99	-13	-39.99	H
1.65473	40.23	Pk	25	-30.4	.8	-95.2	-59.57	-13	-46.57	V
2.47627	44.2	Pk	29	-29.3	.5	-95.2	-50.8	-13	-37.8	V
3.3053	38.16	Pk	31.1	-27.9	.8	-95.2	-53.04	-13	-40.04	V
Mid Channel, 836.6MHz										
1.67235	39.53	Pk	25	-30.4	.7	-95.2	-60.37	-13	-47.37	H
2.50624	44.04	Pk	29	-29.3	.7	-95.2	-50.76	-13	-37.76	H
3.34428	38.57	Pk	31	-28.2	.6	-95.2	-53.23	-13	-40.23	H
1.67403	40.06	Pk	25	-30.4	.7	-95.2	-59.84	-13	-46.84	V
2.5136	42.26	Pk	29.1	-29.3	.7	-95.2	-52.44	-13	-39.44	V
3.34635	38.56	Pk	31	-28.2	.6	-95.2	-53.24	-13	-40.24	V
High Channel, 846.6MHz										
1.69178	39.38	Pk	25	-30.4	.7	-95.2	-60.52	-13	-47.52	H
2.53793	38.11	Pk	29.3	-29.3	.7	-95.2	-56.39	-13	-43.39	H
3.38595	37.49	Pk	30.8	-28.1	.6	-95.2	-54.41	-13	-41.41	H
1.69215	47.09	Pk	25	-30.4	.7	-95.2	-52.81	-13	-39.81	V
2.54054	38.85	Pk	29.3	-29.3	.7	-95.2	-55.65	-13	-42.65	V
3.38641	37.23	Pk	30.8	-28.1	.6	-95.2	-54.67	-13	-41.67	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/9/2020
Test Engineer:	19410
Configuration:	EUT Only
Mode:	HSDPA Band 5
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.65377	39.64	Pk	24.9	-30.4	.8	-95.2	-60.26	-13	-47.26	H
2.48053	39.39	Pk	29	-29.3	.5	-95.2	-55.61	-13	-42.61	H
3.30496	38.03	Pk	31.1	-27.9	.8	-95.2	-53.17	-13	-40.17	H
1.65291	39.9	Pk	24.9	-30.4	.8	-95.2	-60.00	-13	-47.00	V
2.48003	38.91	Pk	29	-29.3	.5	-95.2	-56.09	-13	-43.09	V
3.30402	37.67	Pk	31.1	-27.9	.8	-95.2	-53.53	-13	-40.53	V
Mid Channel, 836.6MHz										
1.67278	39.44	Pk	25	-30.4	.7	-95.2	-60.46	-13	-47.46	H
2.50836	36.91	Pk	29.1	-29.3	.7	-95.2	-57.79	-13	-44.79	H
3.34653	37.78	Pk	31	-28.2	.6	-95.2	-54.02	-13	-41.02	H
1.67338	39.4	Pk	25	-30.4	.7	-95.2	-60.5	-13	-47.5	V
2.51029	38.56	Pk	29.1	-29.3	.7	-95.2	-56.14	-13	-43.14	V
3.3472	38.66	Pk	31	-28.2	.6	-95.2	-53.14	-13	-40.14	V
High Channel, 846.6MHz										
1.69467	40.47	Pk	25	-30.3	.7	-95.2	-59.33	-13	-46.33	H
2.53955	39.6	Pk	29.3	-29.3	.7	-95.2	-54.9	-13	-41.9	H
3.38648	37.52	Pk	30.8	-28.1	.6	-95.2	-54.38	-13	-41.38	H
1.69628	39.82	Pk	25	-30.3	.7	-95.2	-59.98	-13	-46.98	V
2.54033	38.92	Pk	29.3	-29.3	.7	-95.2	-55.58	-13	-42.58	V
3.38522	38.22	Pk	30.8	-28.1	.6	-95.2	-53.68	-13	-40.68	V

Pk – Peak Detector

9.2.7. WCDMA BAND 2

REL 99 MODE

Project #:	13259315
Date:	6/8/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.70724	39.63	Pk	30.3	-27.7	1	-95.2	-51.97	-13	-38.97	H
5.52414	37.27	Pk	33.2	-26	1	-95.2	-49.73	-13	-36.73	H
7.35534	36.55	Pk	36.9	-23.7	1	-95.2	-44.45	-13	-31.45	H
3.68729	39.52	Pk	30.2	-27.6	1	-95.2	-52.08	-13	-39.08	V
5.55689	37.71	Pk	33.2	-26.1	1	-95.2	-49.39	-13	-36.39	V
7.3835	35.48	Pk	37	-24	1	-95.2	-45.72	-13	-32.72	V
Mid Channel, 1880MHz										
3.82144	38.89	Pk	31	-27.8	1	-95.2	-52.11	-13	-39.11	H
5.63334	37.43	Pk	33.1	-26	1	-95.2	-49.67	-13	-36.67	H
7.60855	35.9	Pk	37	-23.7	1	-95.2	-45	-13	-32	H
3.77071	39.13	Pk	30.8	-27.8	1	-95.2	-52.07	-13	-39.07	V
5.5513	37.24	Pk	33.3	-26.1	1	-95.2	-49.76	-13	-36.76	V
7.57961	36.5	Pk	36.9	-24	1	-95.2	-44.8	-13	-31.8	V
High Channel, 1907.6MHz										
3.85348	38.78	Pk	31.1	-27.7	1	-95.2	-52.02	-13	-39.02	H
5.71896	43.05	Pk	33	-25.4	1	-95.2	-43.55	-13	-30.55	H
7.64938	37.52	Pk	36.9	-23.4	1	-95.2	-43.18	-13	-30.18	H
3.84711	39	Pk	31.2	-27.7	1	-95.2	-51.7	-13	-38.7	V
5.72566	40.38	Pk	33	-25.4	1	-95.2	-46.22	-13	-33.22	V
7.59349	36.59	Pk	36.8	-23.8	1	-95.2	-44.61	-13	-31.61	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/8/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.6873	32.05	Pk	30.2	-27.6	1	-95.2	-59.55	-13	-46.55	H
5.55198	30.27	Pk	33.3	-26.1	1	-95.2	-56.73	-13	-43.73	H
7.52359	29.55	Pk	36.8	-23.9	1	-95.2	-51.75	-13	-38.75	H
3.67145	31.74	Pk	30.2	-27.7	1	-95.2	-59.96	-13	-46.96	V
5.56205	30.77	Pk	33.2	-26	1	-95.2	-56.23	-13	-43.23	V
7.44945	28.74	Pk	36.7	-23.8	1	-95.2	-52.56	-13	-39.56	V
Mid Channel, 1880MHz										
3.76068	39.45	Pk	30.7	-27.7	1	-95.2	-51.75	-13	-38.75	H
5.52267	37.5	Pk	33.2	-26	1	-95.2	-49.5	-13	-36.5	H
7.3573	36.16	Pk	36.9	-23.7	1	-95.2	-44.84	-13	-31.84	H
3.76084	31.76	Pk	30.7	-27.7	1	-95.2	-59.44	-13	-46.44	V
5.50496	30.17	Pk	33.2	-26.2	1	-95.2	-57.03	-13	-44.03	V
7.33849	29.35	Pk	36.9	-23.7	1	-95.2	-51.65	-13	-38.65	V
High Channel, 1907.6MHz										
3.26264	39.89	Pk	31.4	-28.3	1	-95.2	-51.21	-13	-38.21	H
5.72099	36.9	Pk	33	-25.4	1	-95.2	-49.7	-13	-36.7	H
7.66338	36.04	Pk	37	-23.4	1	-95.2	-44.56	-13	-31.56	H
3.1996	39.94	Pk	31.2	-28.5	1	-95.2	-51.56	-13	-38.56	V
5.72354	37.73	Pk	33	-25.4	1	-95.2	-48.87	-13	-35.87	V
7.65026	36.7	Pk	36.9	-23.4	1	-95.2	-44	-13	-31	V

Pk – Peak Detector

9.2.8. WCDMA BAND 4

REL 99 MODE

Project #:	13259315
Date:	6/8/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.41517	38.24	Pk	30.6	-28.1	1	-95.2	-53.46	-13	-40.46	H
5.1657	37.5	Pk	33.7	-26.5	1	-95.2	-49.5	-13	-36.5	H
6.81407	37.13	Pk	36	-24.8	1	-95.2	-45.87	-13	-32.87	H
3.3686	39.07	Pk	30.9	-28	1	-95.2	-52.23	-13	-39.23	V
5.13412	41.54	Pk	33.8	-26.2	1	-95.2	-45.06	-13	-32.06	V
6.81476	37.17	Pk	36	-24.8	1	-95.2	-45.83	-13	-32.83	V
Mid Channel, 1732.6MHz										
3.48345	38.74	Pk	30.2	-27.8	1	-95.2	-53.06	-13	-40.06	H
5.14909	38.6	Pk	33.8	-26.3	1	-95.2	-48.1	-13	-35.1	H
7.06522	35.81	Pk	36.7	-23.9	1	-95.2	-45.59	-13	-32.59	H
3.51064	37.74	Pk	30.2	-27.7	1	-95.2	-53.96	-13	-40.96	V
5.2015	39.17	Pk	33.7	-26.2	1	-95.2	-47.53	-13	-34.53	V
7.07096	36.42	Pk	36.7	-23.8	1	-95.2	-44.88	-13	-31.88	V
High Channel, 1752.6MHz										
3.48991	39.08	Pk	30.2	-27.7	1	-95.2	-52.62	-13	-39.62	H
5.21224	38.49	Pk	33.6	-26.3	1	-95.2	-48.41	-13	-35.41	H
7.0146	35.9	Pk	36.5	-24.1	1	-95.2	-45.9	-13	-32.9	H
3.52521	37.49	Pk	30.2	-27.9	1	-95.2	-54.41	-13	-41.41	V
5.26096	38.47	Pk	33.4	-26.3	1	-95.2	-48.63	-13	-35.63	V
7.06557	36.5	Pk	36.7	-23.9	1	-95.2	-44.9	-13	-31.9	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	8/9/2020
Test Engineer:	19410
Configuration:	EUT Only
Mode:	HSDPA Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.42685	37.89	Pk	30.5	-28	1	-95.2	-53.81	-13	-40.81	H
5.13654	38.13	Pk	33.9	-26.2	1	-95.2	-48.37	-13	-35.37	H
6.85065	35.55	Pk	36.1	-24.5	1	-95.2	-47.05	-13	-34.05	H
3.42466	29.92	Pk	30.5	-28	1	-95.2	-61.78	-13	-48.78	V
5.13535	37.7	Pk	33.8	-26.2	1	-95.2	-48.90	-13	-35.90	V
6.85118	35.64	Pk	36.1	-24.5	1	-95.2	-46.96	-13	-33.96	V
Mid Channel, 1732.6MHz										
3.46375	37.55	Pk	30.3	-27.9	1	-95.2	-54.25	-13	-41.25	H
5.19828	43.89	Pk	33.7	-26.3	1	-95.2	-42.91	-13	-29.91	H
6.93265	36.45	Pk	36.4	-24.7	1	-95.2	-46.05	-13	-33.05	H
3.46385	37.3	Pk	30.3	-27.9	1	-95.2	-54.5	-13	-41.5	V
5.19657	37.67	Pk	33.7	-26.3	1	-95.2	-49.13	-13	-36.13	V
6.92892	37.43	Pk	36.3	-24.7	1	-95.2	-45.17	-13	-32.17	V
High Channel, 1752.6MHz										
3.50601	36.99	Pk	30.3	-27.7	1	-95.2	-54.61	-13	-41.61	H
5.25674	37.37	Pk	33.5	-26.3	1	-95.2	-49.63	-13	-36.63	H
7.00996	35.63	Pk	36.6	-24.2	1	-95.2	-46.17	-13	-33.17	H
3.50554	37.92	Pk	30.2	-27.7	1	-95.2	-53.78	-13	-40.78	V
5.25788	37.21	Pk	33.4	-26.2	1	-95.2	-49.79	-13	-36.79	V
7.01082	35.64	Pk	36.6	-24.2	1	-95.2	-46.16	-13	-33.16	V

Pk – Peak Detector

9.3. FIELD STRENGTH OF SPURIOUS RADIATION, ANT2

9.3.1. GSM 850

GPRS MODE

Project #:	13259315
Date:	4/10/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	GPRS 850
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.65464	41.78	Pk	28.7	-32.7	.8	-95.2	-56.62	-13	-43.62	H
2.51223	40.6	Pk	32.6	-31.8	.7	-95.2	-53.1	-13	-40.1	H
3.36359	40.66	Pk	32.8	-30.7	.6	-95.2	-51.84	-13	-38.84	H
1.63821	40.9	Pk	28.5	-32.8	.7	-95.2	-57.9	-13	-44.9	V
2.48936	41.52	Pk	32.6	-31.9	.6	-95.2	-52.38	-13	-39.38	V
3.37554	40.86	Pk	32.8	-30.7	.6	-95.2	-51.64	-13	-38.64	V
Mid Channel, 836.6 MHz										
1.68082	42.11	Pk	28.9	-32.8	.7	-95.2	-56.29	-13	-43.29	H
2.52996	40.59	Pk	32.6	-31.7	.7	-95.2	-53.01	-13	-40.01	H
3.36112	40.03	Pk	32.8	-30.7	.6	-95.2	-52.47	-13	-39.47	H
1.69119	41.39	Pk	28.9	-32.7	.7	-95.2	-56.91	-13	-43.91	V
2.53371	40.87	Pk	32.6	-31.6	.7	-95.2	-52.63	-13	-39.63	V
3.36438	40.48	Pk	32.8	-30.7	.6	-95.2	-52.02	-13	-39.02	V
High Channel, 848.8 MHz										
1.7052	41.51	Pk	29.2	-32.6	.6	-95.2	-56.49	-13	-43.49	H
2.54906	40.53	Pk	32.5	-31.6	.6	-95.2	-53.17	-13	-40.17	H
3.42778	40.54	Pk	32.8	-30.4	.6	-95.2	-51.66	-13	-38.66	H
1.69173	41.3	Pk	28.9	-32.7	.7	-95.2	-57	-13	-44	V
2.56227	40.71	Pk	32.6	-31.4	.5	-95.2	-52.79	-13	-39.79	V
3.48985	40.36	Pk	33.1	-30.1	.6	-95.2	-51.24	-13	-38.24	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	4/10/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	EGPRS 850
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.2 MHz										
1.68622	42.04	Pk	28.9	-32.7	.7	-95.2	-56.26	-13	-43.26	H
2.38258	41.2	Pk	32.2	-31.8	.6	-95.2	-53	-13	-40	H
3.30181	40.46	Pk	32.9	-30.7	.6	-95.2	-51.94	-13	-38.94	H
1.7225	41.42	Pk	29.5	-32.6	.7	-95.2	-56.18	-13	-43.18	V
2.37485	41.27	Pk	32.2	-31.8	.5	-95.2	-53.03	-13	-40.03	V
3.30815	40.61	Pk	32.8	-30.6	.6	-95.2	-51.79	-13	-38.79	V
Mid Channel, 836.6 MHz										
1.66292	41.91	Pk	28.8	-32.8	.8	-95.2	-56.49	-13	-43.49	H
2.50887	40.7	Pk	32.6	-31.8	.6	-95.2	-53.1	-13	-40.1	H
3.37722	40.53	Pk	32.8	-30.7	.6	-95.2	-51.97	-13	-38.97	H
1.65369	41.13	Pk	28.7	-32.7	.7	-95.2	-57.37	-13	-44.37	V
2.49365	42.01	Pk	32.6	-31.9	.7	-95.2	-51.79	-13	-38.79	V
3.36077	40.76	Pk	32.8	-30.7	.6	-95.2	-51.74	-13	-38.74	V
High Channel, 848.8 MHz										
1.69469	41.43	Pk	28.8	-32.7	.7	-95.2	-56.97	-13	-43.97	H
2.56304	41.1	Pk	32.6	-31.5	.5	-95.2	-52.5	-13	-39.5	H
3.53995	39.93	Pk	33.2	-30.4	.6	-95.2	-51.87	-13	-38.87	H
1.68731	41.65	Pk	28.9	-32.7	.7	-95.2	-56.65	-13	-43.65	V
2.51462	40.69	Pk	32.6	-31.8	.7	-95.2	-53.01	-13	-40.01	V
3.54557	40.15	Pk	33.1	-30.4	.6	-95.2	-51.75	-13	-38.75	V

Pk – Peak Detector

9.3.2. GSM 1900

GPRS MODE

Project #:	13259315
Date:	4/20/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.70071	39.53	Pk	33.2	-30.1	1	-95.2	-51.57	-13	-38.57	H
5.54867	38.07	Pk	34.8	-27.9	1	-95.2	-49.23	-13	-36.23	H
7.40869	36.66	Pk	35.7	-24.7	1	-95.2	-46.54	-13	-33.54	H
3.70195	39.98	Pk	33.2	-30.1	1	-95.2	-51.12	-13	-38.12	V
5.55219	38.61	Pk	34.8	-27.9	1	-95.2	-48.69	-13	-35.69	V
7.4062	35.33	Pk	35.7	-24.6	1	-95.2	-47.77	-13	-34.77	V
Mid Channel, 1880MHz										
3.75774	39.87	Pk	33.5	-30.2	1	-95.2	-51.03	-13	-38.03	H
5.64722	38.28	Pk	34.9	-28	1	-95.2	-49.02	-13	-36.02	H
7.52211	35.92	Pk	35.7	-24.5	1	-95.2	-47.08	-13	-34.08	H
3.75805	39.95	Pk	33.5	-30.2	1	-95.2	-50.95	-13	-37.95	V
5.64796	38.19	Pk	34.8	-28	1	-95.2	-49.21	-13	-36.21	V
7.52203	35.92	Pk	35.7	-24.5	1	-95.2	-47.08	-13	-34.08	V
High Channel, 1909.8MHz										
3.81713	40.83	Pk	33.7	-30.1	1	-95.2	-49.77	-13	-36.77	H
5.7253	38.14	Pk	34.9	-28.1	1	-95.2	-49.26	-13	-36.26	H
7.63987	36.24	Pk	35.8	-24.1	1	-95.2	-46.26	-13	-33.26	H
3.81778	40.47	Pk	33.7	-30.1	1	-95.2	-50.13	-13	-37.13	V
5.72469	38.38	Pk	34.9	-28.1	1	-95.2	-49.02	-13	-36.02	V
7.63989	36.41	Pk	35.8	-24.1	1	-95.2	-46.09	-13	-33.09	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	4/20/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.69978	39.91	Pk	33.2	-30.1	1	-95.2	-51.19	-13	-38.19	H
5.54987	38.55	Pk	34.8	-27.9	1	-95.2	-48.75	-13	-35.75	H
7.39445	35.89	Pk	35.6	-24.7	1	-95.2	-47.41	-13	-34.41	H
3.70016	39.77	Pk	33.2	-30.1	1	-95.2	-51.33	-13	-38.33	V
5.55185	38.05	Pk	34.8	-27.9	1	-95.2	-49.25	-13	-36.25	V
7.40555	36.92	Pk	35.7	-24.6	1	-95.2	-46.18	-13	-33.18	V
Mid Channel, 1880MHz										
3.76023	40.1	Pk	33.6	-30.2	1	-95.2	-50.7	-13	-37.7	H
5.64825	38.35	Pk	34.8	-28	1	-95.2	-49.05	-13	-36.05	H
7.52166	35.92	Pk	35.7	-24.4	1	-95.2	-46.98	-13	-33.98	H
3.75907	39.69	Pk	33.5	-30.2	1	-95.2	-51.21	-13	-38.21	V
5.64555	38.34	Pk	34.9	-28	1	-95.2	-48.96	-13	-35.96	V
7.52248	36.28	Pk	35.7	-24.5	1	-95.2	-46.72	-13	-33.72	V
High Channel, 1909.8MHz										
3.81734	41.03	Pk	33.7	-30.1	1	-95.2	-49.57	-13	-36.57	H
5.7254	38.22	Pk	34.9	-28.1	1	-95.2	-49.18	-13	-36.18	H
7.6383	36.45	Pk	35.8	-24.1	1	-95.2	-46.05	-13	-33.05	H
3.81766	39.93	Pk	33.7	-30.1	1	-95.2	-50.67	-13	-37.67	V
5.72271	37.68	Pk	34.9	-28.1	1	-95.2	-49.72	-13	-36.72	V
7.63984	35.65	Pk	35.8	-24.1	1	-95.2	-46.85	-13	-33.85	V

Pk – Peak Detector

9.3.3. CDMA BC10

1xRTT MODE

Project #:	13259315
Date:	7/30/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	1xRTT BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.63472	43.31	Pk	25	-30.5	.7	-95.2	-56.69	-13	-43.69	H
2.45057	41.21	Pk	28.8	-29.4	.5	-95.2	-54.09	-13	-41.09	H
3.2689	39.28	Pk	31.3	-28.2	.6	-95.2	-52.22	-13	-39.22	H
1.63392	41.82	Pk	25	-30.5	.7	-95.2	-58.18	-13	-45.18	V
2.45171	40.83	Pk	28.8	-29.4	.5	-95.2	-54.47	-13	-41.47	V
3.267	39.63	Pk	31.4	-28.2	.6	-95.2	-51.77	-13	-38.77	V
Mid Channel, 820MHz										
1.63955	41.73	Pk	25	-30.5	.7	-95.2	-58.27	-13	-45.27	H
2.45925	42.1	Pk	28.9	-29.4	.5	-95.2	-53.1	-13	-40.1	H
3.28037	38.56	Pk	31.4	-28.1	.8	-95.2	-52.54	-13	-39.54	H
1.64039	42.64	Pk	25	-30.5	.7	-95.2	-57.36	-13	-44.36	V
2.45975	40.04	Pk	28.9	-29.3	.5	-95.2	-55.06	-13	-42.06	V
3.28027	38.6	Pk	31.4	-28.1	.8	-95.2	-52.5	-13	-39.5	V
High Channel, 822.75MHz										
1.64355	41.91	Pk	25	-30.4	.7	-95.2	-57.99	-13	-44.99	H
2.46648	39.11	Pk	28.9	-29.4	.5	-95.2	-56.09	-13	-43.09	H
3.29289	37.98	Pk	31.2	-27.9	.8	-95.2	-53.12	-13	-40.12	H
1.6435	42.37	Pk	25	-30.4	.7	-95.2	-57.53	-13	-44.53	V
2.46734	39.47	Pk	28.9	-29.4	.5	-95.2	-55.73	-13	-42.73	V
3.29279	37.77	Pk	31.2	-28	.8	-95.2	-53.43	-13	-40.43	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/9/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC10
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 817.25MHz										
1.63462	40.52	Pk	25	-30.5	.7	-95.2	-59.48	-13	-46.48	H
2.45055	44.02	Pk	28.8	-29.4	.5	-95.2	-51.28	-13	-38.28	H
3.36981	38.52	Pk	30.9	-28	.6	-95.2	-53.18	-13	-40.18	H
1.63634	41.04	Pk	25	-30.5	.7	-95.2	-58.96	-13	-45.96	V
2.45138	40.54	Pk	28.8	-29.4	.5	-95.2	-54.76	-13	-41.76	V
3.37118	38.7	Pk	30.9	-28	.6	-95.2	-53	-13	-40	V
Mid Channel, 820MHz										
1.63966	40.89	Pk	25	-30.5	.7	-95.2	-59.11	-13	-46.11	H
2.46009	39.4	Pk	28.9	-29.3	.5	-95.2	-55.7	-13	-42.7	H
3.2792	38.33	Pk	31.4	-28.1	.8	-95.2	-52.77	-13	-39.77	H
1.6396	41.45	Pk	25	-30.5	.7	-95.2	-58.55	-13	-45.55	V
2.45824	40.03	Pk	28.9	-29.4	.5	-95.2	-55.17	-13	-42.17	V
3.28138	38.42	Pk	31.4	-28.1	.8	-95.2	-52.68	-13	-39.68	V
High Channel, 822.75MHz										
1.64501	40.57	Pk	25	-30.5	.7	-95.2	-59.43	-13	-46.43	H
2.46682	39.35	Pk	28.9	-29.4	.5	-95.2	-55.85	-13	-42.85	H
3.29064	38.39	Pk	31.2	-28	.8	-95.2	-52.81	-13	-39.81	H
1.64445	41.17	Pk	25	-30.5	.7	-95.2	-58.83	-13	-45.83	V
2.47001	39.37	Pk	29	-29.3	.5	-95.2	-55.63	-13	-42.63	V
3.29239	37.74	Pk	31.2	-28	.8	-95.2	-53.46	-13	-40.46	V

Pk – Peak Detector

9.3.4. CDMA BC0

1xRTT MODE

Project #:	13259315
Date:	7/29/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	1xRTT BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.91724	40.88	Pk	26.2	-30	.6	-95.2	-57.52	-13	-44.52	H
2.50592	40.24	Pk	29	-29.3	.7	-95.2	-54.56	-13	-41.56	H
4.36953	37.76	Pk	32	-26.9	.5	-95.2	-51.84	-13	-38.84	H
1.80235	40.93	Pk	25.9	-30.2	.6	-95.2	-57.97	-13	-44.97	V
2.55604	40.45	Pk	29.3	-29.2	.6	-95.2	-54.05	-13	-41.05	V
4.39255	37.88	Pk	32	-27	.6	-95.2	-51.72	-13	-38.72	V
Mid Channel, 836.52MHz										
1.52764	41.73	Pk	24.8	-30.6	.8	-95.2	-58.47	-13	-45.47	H
2.49992	41.34	Pk	29	-29.3	.6	-95.2	-53.56	-13	-40.56	H
3.32844	38.77	Pk	31	-28.2	.6	-95.2	-53.03	-13	-40.03	H
1.57265	41.22	Pk	24.9	-30.5	.9	-95.2	-58.68	-13	-45.68	V
2.3865	40.94	Pk	28.4	-29.5	.6	-95.2	-54.76	-13	-41.76	V
3.25769	39.76	Pk	31.3	-28.3	.5	-95.2	-51.94	-13	-38.94	V
High Channel, 848.31MHz										
1.97841	40.61	Pk	27.3	-29.9	.6	-95.2	-56.59	-13	-43.59	H
2.6128	41.54	Pk	29.2	-29	.6	-95.2	-52.86	-13	-39.86	H
4.35752	37.8	Pk	32	-27	.5	-95.2	-51.9	-13	-38.9	H
1.9848	40.38	Pk	27.4	-29.9	.6	-95.2	-56.72	-13	-43.72	V
2.50385	40.89	Pk	29	-29.3	.6	-95.2	-54.01	-13	-41.01	V
4.80248	39.48	Pk	33	-27	.7	-95.2	-49.02	-13	-36.02	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/9/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC0
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 824.7MHz										
1.70551	40.47	Pk	25.1	-30.3	.6	-95.2	-59.33	-13	-46.33	H
2.45573	40.42	Pk	28.9	-29.4	.5	-95.2	-54.78	-13	-41.78	H
3.292	39.29	Pk	31.2	-28	.8	-95.2	-51.91	-13	-38.91	H
1.69436	40.38	Pk	25	-30.3	.7	-95.2	-59.42	-13	-46.42	V
2.44956	40.1	Pk	28.8	-29.4	.5	-95.2	-55.2	-13	-42.2	V
3.29229	39.74	Pk	31.2	-28	.8	-95.2	-51.46	-13	-38.46	V
Mid Channel, 836.52MHz										
1.71071	40.83	Pk	25.1	-30.4	.6	-95.2	-59.07	-13	-46.07	H
2.57292	40.14	Pk	29.3	-29.1	.5	-95.2	-54.36	-13	-41.36	H
3.37768	38.23	Pk	30.8	-28.1	.6	-95.2	-53.67	-13	-40.67	H
1.70071	41.24	Pk	25.1	-30.4	.7	-95.2	-58.56	-13	-45.56	V
2.62666	39.37	Pk	29.2	-29	.6	-95.2	-55.03	-13	-42.03	V
3.47962	38.38	Pk	30.2	-27.8	.8	-95.2	-53.62	-13	-40.62	V
High Channel, 848.31MHz										
1.66169	40.42	Pk	25	-30.4	.8	-95.2	-59.38	-13	-46.38	H
2.58047	39.6	Pk	29.3	-29.2	.5	-95.2	-55	-13	-42	H
3.29016	39.49	Pk	31.2	-28	.8	-95.2	-51.71	-13	-38.71	H
1.65081	41.01	Pk	24.9	-30.4	.8	-95.2	-58.89	-13	-45.89	V
2.5736	40.05	Pk	29.3	-29.1	.5	-95.2	-54.45	-13	-41.45	V
3.28165	39.46	Pk	31.4	-28.1	.8	-95.2	-51.64	-13	-38.64	V

Pk – Peak Detector

9.3.5. CDMA BC1

1xRTT MODE

Project #:	13259315
Date:	7/30/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	1xRTT BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
3.70186	39.48	Pk	30.3	-27.3	1	-95.2	-51.72	-13	-38.72	H
5.55338	37.33	Pk	33.3	-25.9	1	-95.2	-49.47	-13	-36.47	H
7.40388	36.17	Pk	36.9	-23.1	1	-95.2	-44.23	-13	-31.23	H
3.70353	38.76	Pk	30.3	-27.4	1	-95.2	-52.54	-13	-39.54	V
5.5538	37.04	Pk	33.3	-25.8	1	-95.2	-49.66	-13	-36.66	V
7.40356	35.14	Pk	36.9	-23.1	1	-95.2	-45.26	-13	-32.26	V
Mid Channel, 1880MHz										
3.7603	40.09	Pk	30.6	-27.5	1	-95.2	-51.01	-13	-38.01	H
5.64155	36.66	Pk	33.1	-24.8	1	-95.2	-49.24	-13	-36.24	H
7.51887	36.03	Pk	36.7	-23.1	1	-95.2	-44.57	-13	-31.57	H
3.76165	40.27	Pk	30.7	-27.5	1	-95.2	-50.73	-13	-37.73	V
5.6418	36.29	Pk	33.2	-24.8	1	-95.2	-49.51	-13	-36.51	V
7.52181	35.58	Pk	36.7	-23.1	1	-95.2	-45.02	-13	-32.02	V
High Channel, 1908.75MHz										
3.81644	38.88	Pk	31	-27.3	1	-95.2	-51.62	-13	-38.62	H
5.72533	36.88	Pk	33	-24.4	1	-95.2	-48.72	-13	-35.72	H
7.63555	36.25	Pk	36.9	-23.6	1	-95.2	-44.65	-13	-31.65	H
3.81655	39.34	Pk	31	-27.3	1	-95.2	-51.16	-13	-38.16	V
5.72512	36.27	Pk	33	-24.4	1	-95.2	-49.33	-13	-36.33	V
7.63646	35.8	Pk	36.9	-23.6	1	-95.2	-45.1	-13	-32.1	V

Pk – Peak Detector

1xEV-DO REV A MODE

Project #:	13259315
Date:	7/9/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	1xEV-DO REV A BC1
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1851.25MHz										
3.70245	38.87	Pk	30.3	-27.4	1	-95.2	-52.43	-13	-39.43	H
5.55327	37.47	Pk	33.3	-25.9	1	-95.2	-49.33	-13	-36.33	H
7.40505	35.89	Pk	36.9	-23.1	1	-95.2	-44.51	-13	-31.51	H
3.70211	39.34	Pk	30.3	-27.3	1	-95.2	-51.86	-13	-38.86	V
5.55543	38.14	Pk	33.3	-25.8	1	-95.2	-48.56	-13	-35.56	V
7.40364	35.44	Pk	36.9	-23.1	1	-95.2	-44.96	-13	-31.96	V
Mid Channel, 1880MHz										
3.76139	38.52	Pk	30.7	-27.5	1	-95.2	-52.48	-13	-39.48	H
5.63824	36.76	Pk	33.1	-24.8	1	-95.2	-49.14	-13	-36.14	H
7.51976	35.82	Pk	36.7	-23.1	1	-95.2	-44.78	-13	-31.78	H
3.76155	38.48	Pk	30.7	-27.5	1	-95.2	-52.52	-13	-39.52	V
5.64046	36.96	Pk	33.1	-24.8	1	-95.2	-48.94	-13	-35.94	V
7.52118	36.14	Pk	36.7	-23.1	1	-95.2	-44.46	-13	-31.46	V
High Channel, 1908.75MHz										
3.81664	38.81	Pk	31	-27.3	1	-95.2	-51.69	-13	-38.69	H
5.72621	35.89	Pk	33	-24.4	1	-95.2	-49.71	-13	-36.71	H
7.63631	36.44	Pk	36.9	-23.6	1	-95.2	-44.46	-13	-31.46	H
3.81551	38.59	Pk	31	-27.4	1	-95.2	-52.01	-13	-39.01	V
5.72659	36.24	Pk	33	-24.4	1	-95.2	-49.36	-13	-36.36	V
7.63542	36.26	Pk	36.9	-23.6	1	-95.2	-44.64	-13	-31.64	V

Pk – Peak Detector

9.3.6. WCDMA BAND 5

REL 99 MODE

Project #:	13259315
Date:	6/9/2020
Test Engineer:	19410
Configuration:	EUT Only
Mode:	WCDMA REL99
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.65437	40.15	Pk	24.9	-30.4	.7	-95.2	-59.85	-13	-46.85	H
2.47993	39.38	Pk	29	-29.3	.5	-95.2	-55.62	-13	-42.62	H
3.30572	37.83	Pk	31.1	-27.9	.8	-95.2	-53.37	-13	-40.37	H
1.65206	40.35	Pk	24.9	-30.4	.7	-95.2	-59.65	-13	-46.65	V
2.48089	38.06	Pk	29	-29.3	.7	-95.2	-56.74	-13	-43.74	V
3.30427	38.41	Pk	31.1	-27.9	.8	-95.2	-52.79	-13	-39.79	V
Mid Channel, 836.6MHz										
1.67175	39.27	Pk	25	-30.4	.7	-95.2	-60.63	-13	-47.63	H
2.50997	39.32	Pk	29.1	-29.3	.5	-95.2	-55.58	-13	-42.58	H
3.34672	38.67	Pk	31	-28.2	.8	-95.2	-52.93	-13	-39.93	H
1.67521	39.66	Pk	25	-30.4	.7	-95.2	-60.24	-13	-47.24	V
2.51109	39.48	Pk	29.1	-29.3	.7	-95.2	-55.22	-13	-42.22	V
3.34542	37.67	Pk	30.9	-28.2	.8	-95.2	-54.03	-13	-41.03	V
High Channel, 846.6MHz										
1.68925	39.32	Pk	25	-30.4	.7	-95.2	-60.58	-13	-47.58	H
2.53471	38.46	Pk	29.2	-29.3	.6	-95.2	-56.24	-13	-43.24	H
3.37344	37.79	Pk	30.8	-28	.6	-95.2	-54.01	-13	-41.01	H
1.68705	39.82	Pk	25	-30.4	.7	-95.2	-60.08	-13	-47.08	V
2.52112	39.18	Pk	29.2	-29.4	.7	-95.2	-55.52	-13	-42.52	V
3.35208	38.72	Pk	31	-28.1	.6	-95.2	-52.98	-13	-39.98	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	WCDMA HSDPA
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 1.2GHz T1737 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 826.4MHz										
1.65371	40.48	Pk	24.9	-30.4	.7	-95.2	-59.52	-13	-46.52	H
2.57098	40.17	Pk	29.4	-29.2	.5	-95.2	-54.33	-13	-41.33	H
3.28429	38.55	Pk	31.3	-28.1	.6	-95.2	-52.85	-13	-39.85	H
1.69086	39.61	Pk	25	-30.4	.7	-95.2	-60.29	-13	-47.29	V
2.56121	38.87	Pk	29.3	-29.2	.5	-95.2	-55.73	-13	-42.73	V
3.36256	39.11	Pk	30.9	-28	.6	-95.2	-52.59	-13	-39.59	V
Mid Channel, 836.6MHz										
1.63568	40.59	Pk	25	-30.5	.7	-95.2	-59.41	-13	-46.41	H
2.52117	39.54	Pk	29.2	-29.4	.7	-95.2	-55.16	-13	-42.16	H
3.29634	39.05	Pk	31.2	-27.9	.6	-95.2	-52.25	-13	-39.25	H
1.63566	39.83	Pk	25	-30.5	.7	-95.2	-60.17	-13	-47.17	V
2.51095	39.51	Pk	29.1	-29.3	.7	-95.2	-55.19	-13	-42.19	V
3.29427	38.43	Pk	31.2	-27.9	.6	-95.2	-52.87	-13	-39.87	V
High Channel, 846.6MHz										
1.69475	39.75	Pk	25	-30.3	.7	-95.2	-60.05	-13	-47.05	H
2.58859	39.3	Pk	29.2	-29.1	.7	-95.2	-55.1	-13	-42.1	H
3.24879	38.32	Pk	31.4	-28.2	.6	-95.2	-53.08	-13	-40.08	H
1.73988	40.35	Pk	25.4	-30.4	.7	-95.2	-59.15	-13	-46.15	V
2.57533	39.35	Pk	29.3	-29.1	.7	-95.2	-54.95	-13	-41.95	V
3.28881	38.63	Pk	31.2	-28	.6	-95.2	-52.77	-13	-39.77	V

Pk – Peak Detector

9.3.7. WCDMA BAND 2

REL 99 MODE

Project #:	13259315
Date:	8/9/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.77323	39.14	Pk	30.7	-27.8	1	-95.2	-52.16	-13	-39.16	H
5.56366	37.12	Pk	33.2	-26	1	-95.2	-49.88	-13	-36.88	H
7.50127	35.82	Pk	36.7	-23.9	1	-95.2	-45.58	-13	-32.58	H
3.8451	39.04	Pk	31.2	-27.7	1	-95.2	-51.66	-13	-38.66	V
5.56242	37.74	Pk	33.2	-26	1	-95.2	-49.26	-13	-36.26	V
7.50709	35.58	Pk	36.8	-23.9	1	-95.2	-45.72	-13	-32.72	V
Mid Channel, 1880MHz										
3.79176	38.72	Pk	30.8	-27.8	1	-95.2	-52.48	-13	-39.48	H
5.64223	52.49	Pk	33.2	-26	1	-95.2	-34.51	-13	-21.51	H
7.64619	35.56	Pk	37	-23.5	1	-95.2	-45.14	-13	-32.14	H
3.72669	38.63	Pk	30.5	-27.8	1	-95.2	-52.87	-13	-39.87	V
5.6423	37.18	Pk	33.2	-26	1	-95.2	-49.82	-13	-36.82	V
7.49768	35.47	Pk	36.7	-23.9	1	-95.2	-45.93	-13	-32.93	V
High Channel, 1907.6MHz										
3.79741	38.57	Pk	30.9	-27.8	1	-95.2	-52.53	-13	-39.53	H
5.72385	36.59	Pk	33	-25.4	1	-95.2	-50.01	-13	-37.01	H
7.71637	35.83	Pk	37.1	-23.4	1	-95.2	-44.67	-13	-31.67	H
3.76565	38.74	Pk	30.7	-27.8	1	-95.2	-52.56	-13	-39.56	V
5.7171	36.61	Pk	33	-25.4	1	-95.2	-49.99	-13	-36.99	V
7.71974	35.99	Pk	37.1	-23.4	1	-95.2	-44.51	-13	-31.51	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	8/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.7986	38.65	Pk	30.9	-27.8	1	-95.2	-52.45	-13	-39.45	H
5.5596	37.75	Pk	33.2	-26.1	1	-95.2	-49.35	-13	-36.35	H
7.45726	35.07	Pk	36.8	-23.8	1	-95.2	-46.13	-13	-33.13	H
3.81082	38.6	Pk	30.9	-27.8	1	-95.2	-52.5	-13	-39.5	V
5.55934	38.11	Pk	33.2	-26.1	1	-95.2	-48.99	-13	-35.99	V
7.46869	36.01	Pk	36.7	-23.8	1	-95.2	-45.29	-13	-32.29	V
Mid Channel, 1880MHz										
3.78932	39.08	Pk	30.8	-27.8	1	-95.2	-52.12	-13	-39.12	H
5.64314	46.69	Pk	33.2	-26	1	-95.2	-40.31	-13	-27.31	H
7.66442	35.94	Pk	37	-23.4	1	-95.2	-44.66	-13	-31.66	H
3.84689	38.76	Pk	31.2	-27.7	1	-95.2	-51.94	-13	-38.94	V
5.66231	36.43	Pk	33.1	-25.8	1	-95.2	-50.47	-13	-37.47	V
7.5174	35.52	Pk	36.7	-23.9	1	-95.2	-45.88	-13	-32.88	V
High Channel, 1907.6MHz										
3.8421	38.92	Pk	31.2	-27.7	1	-95.2	-51.78	-13	-38.78	H
5.79166	36.79	Pk	33.3	-25.4	1	-95.2	-49.51	-13	-36.51	H
7.66172	35.9	Pk	37	-23.3	1	-95.2	-44.6	-13	-31.6	H
3.83849	39.35	Pk	31	-27.8	1	-95.2	-51.65	-13	-38.65	V
5.7082	37.05	Pk	33	-25.4	1	-95.2	-49.55	-13	-36.55	V
7.68521	35.31	Pk	36.9	-23.4	1	-95.2	-45.39	-13	-32.39	V

Pk – Peak Detector

9.3.8. WCDMA BAND 4

REL 99 MODE

Project #:	13259315
Date:	6/9/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.43067	38.79	Pk	30.6	-28	1	-95.2	-52.81	-13	-39.81	H
5.13355	39.47	Pk	33.8	-26.2	1	-95.2	-47.13	-13	-34.13	H
6.74041	36.24	Pk	35.8	-24.9	1	-95.2	-47.06	-13	-34.06	H
3.38264	38.2	Pk	30.9	-28.1	1	-95.2	-53.2	-13	-40.2	V
5.13923	41.21	Pk	33.8	-26.2	1	-95.2	-45.39	-13	-32.39	V
6.92546	36.45	Pk	36.2	-24.7	1	-95.2	-46.25	-13	-33.25	V
Mid Channel, 1732.6MHz										
3.48278	37.88	Pk	30.2	-27.8	1	-95.2	-53.92	-13	-40.92	H
4.99929	37.41	Pk	33.6	-25.9	1	-95.2	-49.09	-13	-36.09	H
6.82637	35.57	Pk	36.1	-24.7	1	-95.2	-47.23	-13	-34.23	H
3.5487	38.26	Pk	30.1	-27.8	1	-95.2	-53.64	-13	-40.64	V
5.01208	38.28	Pk	33.7	-26	1	-95.2	-48.22	-13	-35.22	V
6.91472	35.82	Pk	36.3	-24.6	1	-95.2	-46.68	-13	-33.68	V
High Channel, 1752.6MHz										
3.46469	37.91	Pk	30.3	-27.9	1	-95.2	-53.89	-13	-40.89	H
5.19891	38.18	Pk	33.7	-26.3	1	-95.2	-48.62	-13	-35.62	H
7.06712	35.88	Pk	36.7	-23.8	1	-95.2	-45.42	-13	-32.42	H
3.48962	38.66	Pk	30.2	-27.7	1	-95.2	-53.04	-13	-40.04	V
5.25897	46.51	Pk	33.4	-26.2	1	-95.2	-40.49	-13	-27.49	V
7.18389	36.72	Pk	37	-24.1	1	-95.2	-44.58	-13	-31.58	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	HSDPA Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.42649	39.03	Pk	30.5	-28	1	-95.2	-52.67	-13	-39.67	H
5.13785	37.74	Pk	33.9	-26.2	1	-95.2	-48.76	-13	-35.76	H
6.8516	35.4	Pk	36.1	-24.5	1	-95.2	-47.2	-13	-34.2	H
3.42359	38.39	Pk	30.5	-28	1	-95.2	-53.31	-13	-40.31	V
5.13671	37.46	Pk	33.9	-26.2	1	-95.2	-49.04	-13	-36.04	V
6.84969	35.54	Pk	36.1	-24.5	1	-95.2	-47.06	-13	-34.06	V
Mid Channel, 1732.6MHz										
3.46686	43.16	Pk	30.3	-27.9	1	-95.2	-48.64	-13	-35.64	H
5.20129	40.02	Pk	33.7	-26.2	1	-95.2	-46.68	-13	-33.68	H
6.93004	36.52	Pk	36.3	-24.7	1	-95.2	-46.08	-13	-33.08	H
3.46425	37.62	Pk	30.3	-27.9	1	-95.2	-54.18	-13	-41.18	V
5.19629	36.97	Pk	33.7	-26.3	1	-95.2	-49.83	-13	-36.83	V
6.93167	36.11	Pk	36.3	-24.7	1	-95.2	-46.49	-13	-33.49	V
High Channel, 1752.6MHz										
3.50638	37.25	Pk	30.3	-27.7	1	-95.2	-54.35	-13	-41.35	H
5.25816	37.02	Pk	33.4	-26.2	1	-95.2	-49.98	-13	-36.98	H
7.0105	36.05	Pk	36.6	-24.2	1	-95.2	-45.75	-13	-32.75	H
3.5031	37.28	Pk	30.2	-27.7	1	-95.2	-54.42	-13	-41.42	V
5.25863	37.27	Pk	33.4	-26.2	1	-95.2	-49.73	-13	-36.73	V
7.01021	35.6	Pk	36.6	-24.2	1	-95.2	-46.2	-13	-33.2	V

Pk – Peak Detector

9.4. FIELD STRENGTH OF SPURIOUS RADIATION, ANT3

9.4.1. GSM 1900

GPRS MODE

Project #:	13259315
Date:	7/14/2020
Test Engineer:	19212
Configuration:	EUT Only
Mode:	GSM1900 GPRS
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.70081	39.77	Pk	33.4	-27.4	1	-95.2	-48.43	-13	-35.43	H
5.55077	43.49	Pk	35	-26.6	1	-95.2	-42.31	-13	-29.31	H
7.40171	35.89	Pk	36.2	-23.1	1	-95.2	-45.21	-13	-32.21	H
3.69985	39.92	Pk	33.4	-27.5	1	-95.2	-48.38	-13	-35.38	V
5.54854	38.21	Pk	35	-26.6	1	-95.2	-47.59	-13	-34.59	V
7.39967	36.02	Pk	36.2	-23.1	1	-95.2	-45.08	-13	-32.08	V
Mid Channel, 1880MHz										
3.75976	40.51	Pk	33.6	-27.1	1	-95.2	-47.19	-13	-34.19	H
5.63986	41.98	Pk	35.1	-26.4	1	-95.2	-43.52	-13	-30.52	H
7.51827	37.03	Pk	36	-23.3	1	-95.2	-44.47	-13	-31.47	H
3.75867	39.58	Pk	33.6	-27.1	1	-95.2	-48.12	-13	-35.12	V
5.64021	41.36	Pk	35.1	-26.4	1	-95.2	-44.14	-13	-31.14	V
7.52204	36.24	Pk	36	-23.3	1	-95.2	-45.26	-13	-32.26	V
High Channel, 1909.8MHz										
3.81895	40	Pk	33.7	-27.7	1	-95.2	-48.2	-13	-35.2	H
5.72962	40.17	Pk	35.2	-27.1	1	-95.2	-45.93	-13	-32.93	H
7.64114	34.84	Pk	35.9	-21.5	1	-95.2	-44.96	-13	-31.96	H
3.81996	41.25	Pk	33.7	-27.8	1	-95.2	-47.05	-13	-34.05	V
5.72961	41.66	Pk	35.2	-27.1	1	-95.2	-44.44	-13	-31.44	V
7.63911	35.22	Pk	35.9	-21.5	1	-95.2	-44.58	-13	-31.58	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	4/14/2020
Test Engineer:	50822
Configuration:	EUT Only
Mode:	GSM1900 EGPRS
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.71153	40.13	Pk	33.3	-29.9	1	-95.2	-50.67	-13	-37.67	H
5.56644	38.38	Pk	34.9	-27.9	1	-95.2	-48.82	-13	-35.82	H
7.36117	36.37	Pk	35.8	-24.7	1	-95.2	-46.73	-13	-33.73	H
3.70942	40.32	Pk	33.3	-29.9	1	-95.2	-50.48	-13	-37.48	V
5.55833	39.35	Pk	34.8	-27.9	1	-95.2	-47.95	-13	-34.95	V
7.35019	36.29	Pk	35.7	-24.5	1	-95.2	-46.71	-13	-33.71	V
Mid Channel, 1880MHz										
3.7716	40.79	Pk	33.6	-30.1	1	-95.2	-49.91	-13	-36.91	H
5.648	38.96	Pk	34.8	-28	1	-95.2	-48.44	-13	-35.44	H
7.52875	36.68	Pk	35.8	-24.5	1	-95.2	-46.22	-13	-33.22	H
3.78121	40.33	Pk	33.6	-30.1	1	-95.2	-50.37	-13	-37.37	V
5.5539	38.57	Pk	34.8	-27.8	1	-95.2	-48.63	-13	-35.63	V
7.42735	36.13	Pk	35.7	-24.9	1	-95.2	-47.27	-13	-34.27	V
High Channel, 1909.8MHz										
3.83271	40.83	Pk	33.7	-29.8	1	-95.2	-49.47	-13	-36.47	H
5.7653	38.6	Pk	35	-28.2	1	-95.2	-48.8	-13	-35.8	H
7.54697	36.04	Pk	35.8	-24.7	1	-95.2	-47.06	-13	-34.06	H
3.80321	40.03	Pk	33.7	-30.3	1	-95.2	-50.77	-13	-37.77	V
5.75291	39.5	Pk	34.9	-28.2	1	-95.2	-48	-13	-35	V
7.52383	36.36	Pk	35.7	-24.5	1	-95.2	-46.64	-13	-33.64	V

Pk – Peak Detector

9.4.2. WCDMA BAND 2

REL 99 MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	REL 99 Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.70377	39.29	Pk	30.3	-27.7	1	-95.2	-52.31	-13	-39.31	H
5.55835	37.2	Pk	33.2	-26.1	1	-95.2	-49.9	-13	-36.9	H
7.40977	35.12	Pk	36.8	-24	1	-95.2	-46.28	-13	-33.28	H
3.70534	38.39	Pk	30.3	-27.7	1	-95.2	-53.21	-13	-40.21	V
5.55805	37.5	Pk	33.2	-26.1	1	-95.2	-49.6	-13	-36.6	V
7.40759	35.1	Pk	36.8	-24	1	-95.2	-46.3	-13	-33.3	V
Mid Channel, 1880MHz										
3.76066	38.86	Pk	30.7	-27.7	1	-95.2	-52.34	-13	-39.34	H
5.63919	37.02	Pk	33.1	-26	1	-95.2	-50.08	-13	-37.08	H
7.52905	35.49	Pk	36.9	-23.8	1	-95.2	-45.61	-13	-32.61	H
3.75864	38.81	Pk	30.6	-27.7	1	-95.2	-52.49	-13	-39.49	V
5.63933	38.27	Pk	33.1	-26	1	-95.2	-48.83	-13	-35.83	V
7.53008	36.47	Pk	36.9	-23.8	1	-95.2	-44.63	-13	-31.63	V
High Channel, 1907.6MHz										
3.81709	39.08	Pk	31	-27.7	1	-95.2	-51.82	-13	-38.82	H
5.72337	37.34	Pk	33	-25.4	1	-95.2	-49.26	-13	-36.26	H
7.63135	35.12	Pk	36.9	-23.6	1	-95.2	-45.78	-13	-32.78	H
3.81363	38.82	Pk	31	-27.8	1	-95.2	-52.18	-13	-39.18	V
5.72363	36.43	Pk	33	-25.4	1	-95.2	-50.17	-13	-37.17	V
7.62986	35.65	Pk	36.9	-23.6	1	-95.2	-45.25	-13	-32.25	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.70592	38.11	Pk	30.3	-27.7	1	-95.2	-53.49	-13	-40.49	H
5.55643	36.67	Pk	33.2	-26.1	1	-95.2	-50.43	-13	-37.43	H
7.40883	35.9	Pk	36.8	-24	1	-95.2	-45.5	-13	-32.5	H
3.70324	38.59	Pk	30.3	-27.7	1	-95.2	-53.01	-13	-40.01	V
5.55731	36.97	Pk	33.2	-26.1	1	-95.2	-50.13	-13	-37.13	V
7.40747	35.86	Pk	36.8	-24	1	-95.2	-45.54	-13	-32.54	V
Mid Channel, 1880MHz										
3.76026	38.16	Pk	30.6	-27.7	1	-95.2	-53.14	-13	-40.14	H
5.63933	37.5	Pk	33.1	-26	1	-95.2	-49.6	-13	-36.6	H
7.53199	35.7	Pk	36.9	-23.8	1	-95.2	-45.4	-13	-32.4	H
3.76108	38.83	Pk	30.7	-27.7	1	-95.2	-52.37	-13	-39.37	V
5.63967	37.29	Pk	33.1	-26	1	-95.2	-49.81	-13	-36.81	V
7.52951	36.6	Pk	36.9	-23.8	1	-95.2	-44.5	-13	-31.5	V
High Channel, 1907.6MHz										
3.81538	38.55	Pk	31	-27.7	1	-95.2	-52.35	-13	-39.35	H
5.72318	37.16	Pk	33	-25.4	1	-95.2	-49.44	-13	-36.44	H
7.62862	35.86	Pk	36.9	-23.6	1	-95.2	-45.04	-13	-32.04	H
3.81422	38.99	Pk	31	-27.8	1	-95.2	-52.01	-13	-39.01	V
5.72321	36.89	Pk	33	-25.4	1	-95.2	-49.71	-13	-36.71	V
7.62891	35.57	Pk	36.9	-23.6	1	-95.2	-45.33	-13	-32.33	V

Pk – Peak Detector

9.4.3. WCDMA BAND 4

REL 99 MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	REL 99 Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.42702	41.78	Pk	30.5	-28	1	-95.2	-49.92	-13	-36.92	H
5.13335	43.9	Pk	33.8	-26.2	1	-95.2	-42.7	-13	-29.7	H
6.8488	35.33	Pk	36.1	-24.5	1	-95.2	-47.27	-13	-34.27	H
3.42447	39.39	Pk	30.5	-28	1	-95.2	-52.31	-13	-39.31	V
5.13686	37.66	Pk	33.9	-26.2	1	-95.2	-48.84	-13	-35.84	V
6.84855	35.28	Pk	36.1	-24.5	1	-95.2	-47.32	-13	-34.32	V
Mid Channel, 1732.6MHz										
3.46368	40.98	Pk	30.3	-27.9	1	-95.2	-50.82	-13	-37.82	H
5.19557	42.13	Pk	33.7	-26.3	1	-95.2	-44.67	-13	-31.67	H
6.9315	36.59	Pk	36.3	-24.7	1	-95.2	-46.01	-13	-33.01	H
3.46643	37.66	Pk	30.3	-27.9	1	-95.2	-54.14	-13	-41.14	V
5.19685	37.86	Pk	33.7	-26.3	1	-95.2	-48.94	-13	-35.94	V
6.92974	35.94	Pk	36.3	-24.7	1	-95.2	-46.66	-13	-33.66	V
High Channel, 1752.6MHz										
3.50645	39.35	Pk	30.3	-27.7	1	-95.2	-52.25	-13	-39.25	H
5.25598	39.85	Pk	33.5	-26.3	1	-95.2	-47.15	-13	-34.15	H
7.01091	36.18	Pk	36.5	-24.2	1	-95.2	-45.72	-13	-32.72	H
3.50348	38.24	Pk	30.2	-27.7	1	-95.2	-53.46	-13	-40.46	V
5.25715	37.83	Pk	33.4	-26.3	1	-95.2	-49.27	-13	-36.27	V
7.01166	36.6	Pk	36.5	-24.2	1	-95.2	-45.3	-13	-32.3	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	45258
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.42371	37.74	Pk	30.5	-28	1	-95.2	-53.96	-13	-40.96	H
5.13767	37.43	Pk	33.9	-26.2	1	-95.2	-49.07	-13	-36.07	H
6.84999	35.56	Pk	36.1	-24.5	1	-95.2	-47.04	-13	-34.04	H
3.42594	38.74	Pk	30.5	-28	1	-95.2	-52.96	-13	-39.96	V
5.13629	37.13	Pk	33.9	-26.2	1	-95.2	-49.37	-13	-36.37	V
6.85197	35.84	Pk	36.1	-24.6	1	-95.2	-46.86	-13	-33.86	V
Mid Channel, 1732.6MHz										
3.46495	37.85	Pk	30.3	-27.9	1	-95.2	-53.95	-13	-40.95	H
5.19851	37.25	Pk	33.7	-26.3	1	-95.2	-49.55	-13	-36.55	H
6.92903	36.1	Pk	36.3	-24.7	1	-95.2	-46.5	-13	-33.5	H
3.46663	37.19	Pk	30.3	-27.9	1	-95.2	-54.61	-13	-41.61	V
5.19812	36.85	Pk	33.7	-26.3	1	-95.2	-49.95	-13	-36.95	V
6.93116	36.09	Pk	36.3	-24.7	1	-95.2	-46.51	-13	-33.51	V
High Channel, 1752.6MHz										
3.50413	37.92	Pk	30.2	-27.7	1	-95.2	-53.78	-13	-40.78	H
5.25926	37.31	Pk	33.4	-26.3	1	-95.2	-49.79	-13	-36.79	H
7.0092	35.33	Pk	36.6	-24.3	1	-95.2	-46.57	-13	-33.57	H
3.50462	37.27	Pk	30.2	-27.7	1	-95.2	-54.43	-13	-41.43	V
5.25654	36.59	Pk	33.5	-26.3	1	-95.2	-50.41	-13	-37.41	V
7.01006	35.92	Pk	36.6	-24.2	1	-95.2	-45.88	-13	-32.88	V

Pk – Peak Detector

9.5. FIELD STRENGTH OF SPURIOUS RADIATION, ANT4

9.5.1. GSM 1900

GPRS MODE

Project #:	13259315
Date:	4/21/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	GPRS GSM1900
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.70174	39.93	Pk	33.2	-30.1	1	-95.2	-51.17	-13	-38.17	H
5.55078	38	Pk	34.8	-27.9	1	-95.2	-49.3	-13	-36.3	H
7.4076	35.6	Pk	35.7	-24.6	1	-95.2	-47.5	-13	-34.5	H
3.70108	40.15	Pk	33.2	-30.1	1	-95.2	-50.95	-13	-37.95	V
5.55178	38.41	Pk	34.8	-27.9	1	-95.2	-48.89	-13	-35.89	V
7.40817	35.78	Pk	35.7	-24.6	1	-95.2	-47.32	-13	-34.32	V
Mid Channel, 1880MHz										
3.75922	40.55	Pk	33.5	-30.2	1	-95.2	-50.35	-13	-37.35	H
5.63649	38.18	Pk	34.8	-28	1	-95.2	-49.22	-13	-36.22	H
7.52299	35.99	Pk	35.7	-24.5	1	-95.2	-47.01	-13	-34.01	H
3.7583	40.99	Pk	33.5	-30.2	1	-95.2	-49.91	-13	-36.91	V
5.63675	38.24	Pk	34.8	-28	1	-95.2	-49.16	-13	-36.16	V
7.52404	36.36	Pk	35.7	-24.5	1	-95.2	-46.64	-13	-33.64	V
High Channel, 1909.8MHz										
3.8174	40.5	Pk	33.7	-30.1	1	-95.2	-50.1	-13	-37.1	H
5.7234	38.23	Pk	34.9	-28.1	1	-95.2	-49.17	-13	-36.17	H
7.64168	36.27	Pk	35.8	-24.1	1	-95.2	-46.23	-13	-33.23	H
3.81712	40.32	Pk	33.7	-30.1	1	-95.2	-50.28	-13	-37.28	V
5.72354	38.05	Pk	34.9	-28.1	1	-95.2	-49.35	-13	-36.35	V
7.64114	36.01	Pk	35.8	-24.1	1	-95.2	-46.49	-13	-33.49	V

Pk – Peak Detector

EGPRS MODE

Project #:	13259315
Date:	4/21/2020
Test Engineer:	20792
Configuration:	EUT Only
Mode:	EGPRS GSM1900
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1850.2MHz										
3.72517	40.46	Pk	33.4	-30	1	-95.2	-50.34	-13	-37.34	H
5.54939	38.39	Pk	34.8	-27.9	1	-95.2	-48.91	-13	-35.91	H
7.40732	35.78	Pk	35.7	-24.6	1	-95.2	-47.32	-13	-34.32	H
3.7002	39.92	Pk	33.2	-30.1	1	-95.2	-51.18	-13	-38.18	V
5.5518	38.07	Pk	34.8	-27.9	1	-95.2	-49.23	-13	-36.23	V
7.40608	36.44	Pk	35.7	-24.6	1	-95.2	-46.66	-13	-33.66	V
Mid Channel, 1880MHz										
3.7573	39.96	Pk	33.5	-30.2	1	-95.2	-50.94	-13	-37.94	H
5.63676	38.41	Pk	34.8	-28	1	-95.2	-48.99	-13	-35.99	H
7.52146	36.62	Pk	35.7	-24.4	1	-95.2	-46.28	-13	-33.28	H
3.75677	39.96	Pk	33.5	-30.2	1	-95.2	-50.94	-13	-37.94	V
5.63857	38.58	Pk	34.8	-28	1	-95.2	-48.82	-13	-35.82	V
7.52385	35.8	Pk	35.7	-24.5	1	-95.2	-47.2	-13	-34.2	V
High Channel, 1909.8MHz										
3.81608	41.02	Pk	33.7	-30.1	1	-95.2	-49.58	-13	-36.58	H
5.72535	38.54	Pk	34.9	-28.1	1	-95.2	-48.86	-13	-35.86	H
7.63858	36.01	Pk	35.8	-24.1	1	-95.2	-46.49	-13	-33.49	H
3.81684	40.19	Pk	33.7	-30.1	1	-95.2	-50.41	-13	-37.41	V
5.72415	38.07	Pk	34.9	-28.1	1	-95.2	-49.33	-13	-36.33	V
7.63934	35.86	Pk	35.8	-24.1	1	-95.2	-46.64	-13	-33.64	V

Pk – Peak Detector

9.5.2. WCDMA BAND 2

REL 99 MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.68878	39	Pk	30.2	-27.6	1	-95.2	-52.6	-13	-39.6	H
4.99661	37.43	Pk	33.6	-25.9	1	-95.2	-49.07	-13	-36.07	H
6.40617	36.82	Pk	34.7	-24.8	1	-95.2	-47.48	-13	-34.48	H
3.62668	38.38	Pk	30.1	-27.8	1	-95.2	-53.52	-13	-40.52	V
4.99411	38.47	Pk	33.6	-25.9	1	-95.2	-48.03	-13	-35.03	V
7.48596	36	Pk	36.7	-23.9	1	-95.2	-45.4	-13	-32.4	V
Mid Channel, 1880MHz										
3.77768	38.7	Pk	30.7	-27.8	1	-95.2	-52.6	-13	-39.6	H
5.64299	45.44	Pk	33.2	-26	1	-95.2	-41.56	-13	-28.56	H
7.56812	35.41	Pk	36.9	-24.1	1	-95.2	-45.99	-13	-32.99	H
3.76911	38.94	Pk	30.8	-27.8	1	-95.2	-52.26	-13	-39.26	V
5.63633	43.8	Pk	33.1	-26	1	-95.2	-43.3	-13	-30.3	V
7.53613	35.9	Pk	36.9	-23.9	1	-95.2	-45.3	-13	-32.3	V
High Channel, 1907.6MHz										
3.81938	38.88	Pk	30.9	-27.8	1	-95.2	-52.22	-13	-39.22	H
5.71912	42.22	Pk	33	-25.4	1	-95.2	-44.38	-13	-31.38	H
7.60361	36.02	Pk	36.9	-23.7	1	-95.2	-44.98	-13	-31.98	H
3.81796	38.82	Pk	30.9	-27.7	1	-95.2	-52.18	-13	-39.18	V
5.72538	40.83	Pk	33	-25.4	1	-95.2	-45.77	-13	-32.77	V
7.59171	36.6	Pk	36.9	-23.8	1	-95.2	-44.5	-13	-31.5	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 2
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1852.4MHz										
3.70233	39.44	Pk	30.3	-27.6	1	-95.2	-52.06	-13	-39.06	H
5.55963	39.9	Pk	33.2	-26.1	1	-95.2	-47.2	-13	-34.2	H
7.26848	36.14	Pk	37.2	-23.4	1	-95.2	-44.26	-13	-31.26	H
3.68062	38.26	Pk	30.2	-27.7	1	-95.2	-53.44	-13	-40.44	V
5.55936	37.48	Pk	33.2	-26.1	1	-95.2	-49.62	-13	-36.62	V
7.66277	35.62	Pk	37	-23.4	1	-95.2	-44.98	-13	-31.98	V
Mid Channel, 1880MHz										
3.76535	38.95	Pk	30.7	-27.8	1	-95.2	-52.35	-13	-39.35	H
5.64317	43.12	Pk	33.2	-26	1	-95.2	-43.88	-13	-30.88	H
7.53464	35.76	Pk	36.9	-23.8	1	-95.2	-45.34	-13	-32.34	H
3.76119	39.15	Pk	30.7	-27.7	1	-95.2	-52.05	-13	-39.05	V
5.63719	38.7	Pk	33.1	-26	1	-95.2	-48.4	-13	-35.4	V
7.49289	35.35	Pk	36.8	-23.9	1	-95.2	-45.95	-13	-32.95	V
High Channel, 1907.6MHz										
3.81873	39.47	Pk	30.9	-27.7	1	-95.2	-51.53	-13	-38.53	H
5.74104	36.42	Pk	33.1	-25.3	1	-95.2	-49.98	-13	-36.98	H
7.66085	35.93	Pk	37	-23.3	1	-95.2	-44.57	-13	-31.57	H
3.79408	38.69	Pk	30.8	-27.8	1	-95.2	-52.51	-13	-39.51	V
5.73133	36.34	Pk	33.1	-25.4	1	-95.2	-50.16	-13	-37.16	V
7.6114	35.8	Pk	36.9	-23.7	1	-95.2	-45.2	-13	-32.2	V

Pk – Peak Detector

9.5.3. WCDMA BAND 4

REL 99 MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	REL 99 Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.36722	38.55	Pk	31	-28	1	-95.2	-52.65	-13	-39.65	H
5.137	38.22	Pk	33.9	-26.2	1	-95.2	-48.28	-13	-35.28	H
6.81933	35.66	Pk	36.1	-24.8	1	-95.2	-47.24	-13	-34.24	H
3.35384	38.48	Pk	31	-28.1	1	-95.2	-52.82	-13	-39.82	V
5.13584	38.57	Pk	33.9	-26.2	1	-95.2	-47.93	-13	-34.93	V
6.80949	36.67	Pk	36	-24.8	1	-95.2	-46.33	-13	-33.33	V
Mid Channel, 1732.6MHz										
3.41886	38.99	Pk	30.6	-28.1	1	-95.2	-52.71	-13	-39.71	H
5.19501	40.87	Pk	33.7	-26.3	1	-95.2	-45.93	-13	-32.93	H
6.94241	36.11	Pk	36.3	-24.6	1	-95.2	-46.39	-13	-33.39	H
3.37153	38.42	Pk	30.9	-28	1	-95.2	-52.88	-13	-39.88	V
5.20163	41.14	Pk	33.7	-26.2	1	-95.2	-45.56	-13	-32.56	V
6.88813	35.7	Pk	36.1	-24.6	1	-95.2	-47	-13	-34	V
High Channel, 1752.6MHz										
3.49457	38.11	Pk	30.2	-27.6	1	-95.2	-53.49	-13	-40.49	H
5.26135	42.2	Pk	33.4	-26.3	1	-95.2	-44.9	-13	-31.9	H
7.06758	36.23	Pk	36.7	-23.8	1	-95.2	-45.07	-13	-32.07	H
3.51843	37.86	Pk	30.1	-27.8	1	-95.2	-54.04	-13	-41.04	V
5.25429	44.61	Pk	33.5	-26.4	1	-95.2	-42.49	-13	-29.49	V
7.06455	36.41	Pk	36.6	-23.9	1	-95.2	-45.09	-13	-32.09	V

Pk – Peak Detector

HSDPA MODE

Project #:	13259315
Date:	6/10/2020
Test Engineer:	19206
Configuration:	EUT Only
Mode:	HSDPA Band 4
Chamber #:	Chamber B

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	HPF 2.7GHz T772 1-18GHz	EIRP CF	Corrected Reading (dBm)	Limit	Margin (dB)	Polarity
Low Channel, 1712.4MHz										
3.41377	38.31	Pk	30.6	-28.1	1	-95.2	-53.39	-13	-40.39	H
5.1347	42.16	Pk	33.8	-26.2	1	-95.2	-44.44	-13	-31.44	H
6.75881	36.72	Pk	35.8	-24.9	1	-95.2	-46.58	-13	-33.58	H
3.42134	38.52	Pk	30.6	-28	1	-95.2	-53.08	-13	-40.08	V
5.13972	40.03	Pk	33.8	-26.2	1	-95.2	-46.57	-13	-33.57	V
6.75464	36.7	Pk	35.8	-24.8	1	-95.2	-46.5	-13	-33.5	V
Mid Channel, 1732.6MHz										
3.47734	38.07	Pk	30.2	-27.8	1	-95.2	-53.73	-13	-40.73	H
5.20082	52.22	Pk	33.7	-26.2	1	-95.2	-34.48	-13	-21.48	H
6.824	35.95	Pk	36.1	-24.7	1	-95.2	-46.85	-13	-33.85	H
3.43057	38.31	Pk	30.6	-28	1	-95.2	-53.29	-13	-40.29	V
5.19776	38.41	Pk	33.7	-26.3	1	-95.2	-48.39	-13	-35.39	V
6.82849	37.02	Pk	36	-24.7	1	-95.2	-45.88	-13	-32.88	V
High Channel, 1752.6MHz										
3.54406	38.29	Pk	30.1	-27.8	1	-95.2	-53.61	-13	-40.61	H
5.26021	41.44	Pk	33.4	-26.3	1	-95.2	-45.66	-13	-32.66	H
7.13114	35.96	Pk	36.7	-23.9	1	-95.2	-45.44	-13	-32.44	H
3.53771	38.38	Pk	30.2	-27.9	1	-95.2	-53.52	-13	-40.52	V
5.25471	38.29	Pk	33.5	-26.4	1	-95.2	-48.81	-13	-35.81	V
7.12089	36.83	Pk	36.8	-23.8	1	-95.2	-44.37	-13	-31.37	V

Pk – Peak Detector

10. SETUP PHOTOS

Please refer to 13259315-EP1V1 for setup photos

END OF REPORT