
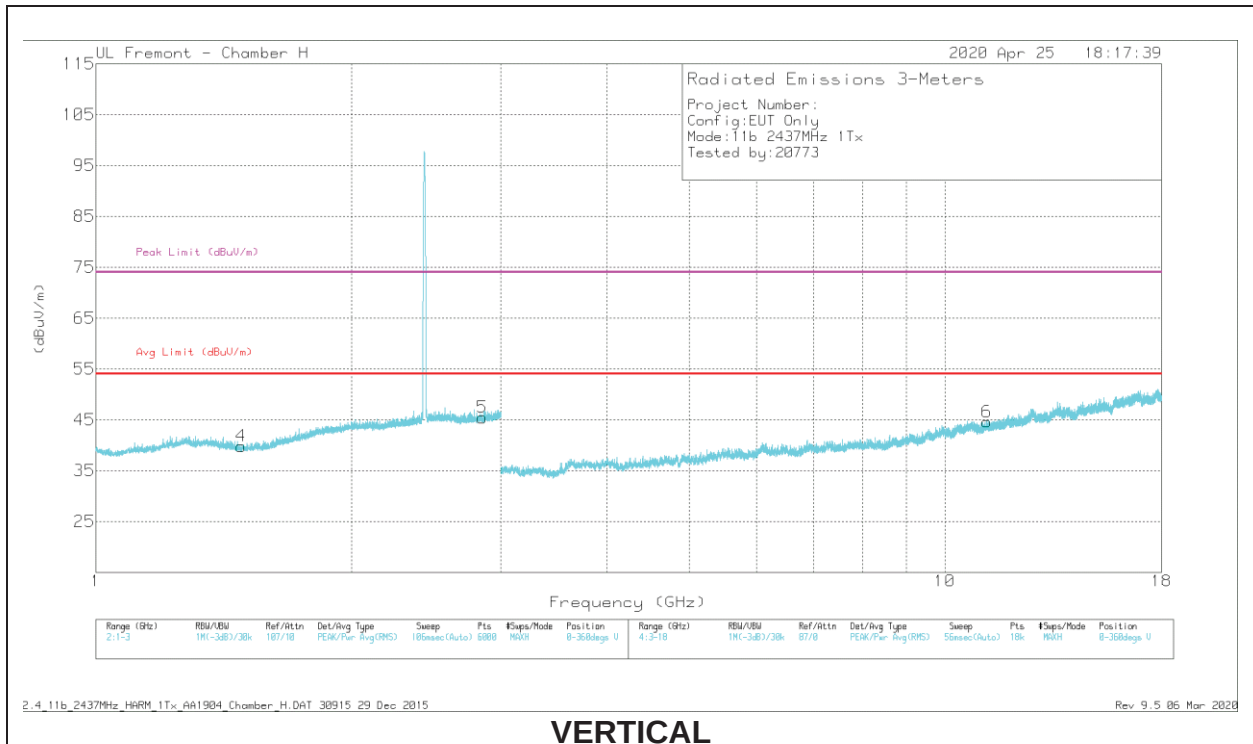


MID CHANNEL, CH 6 RESULTS

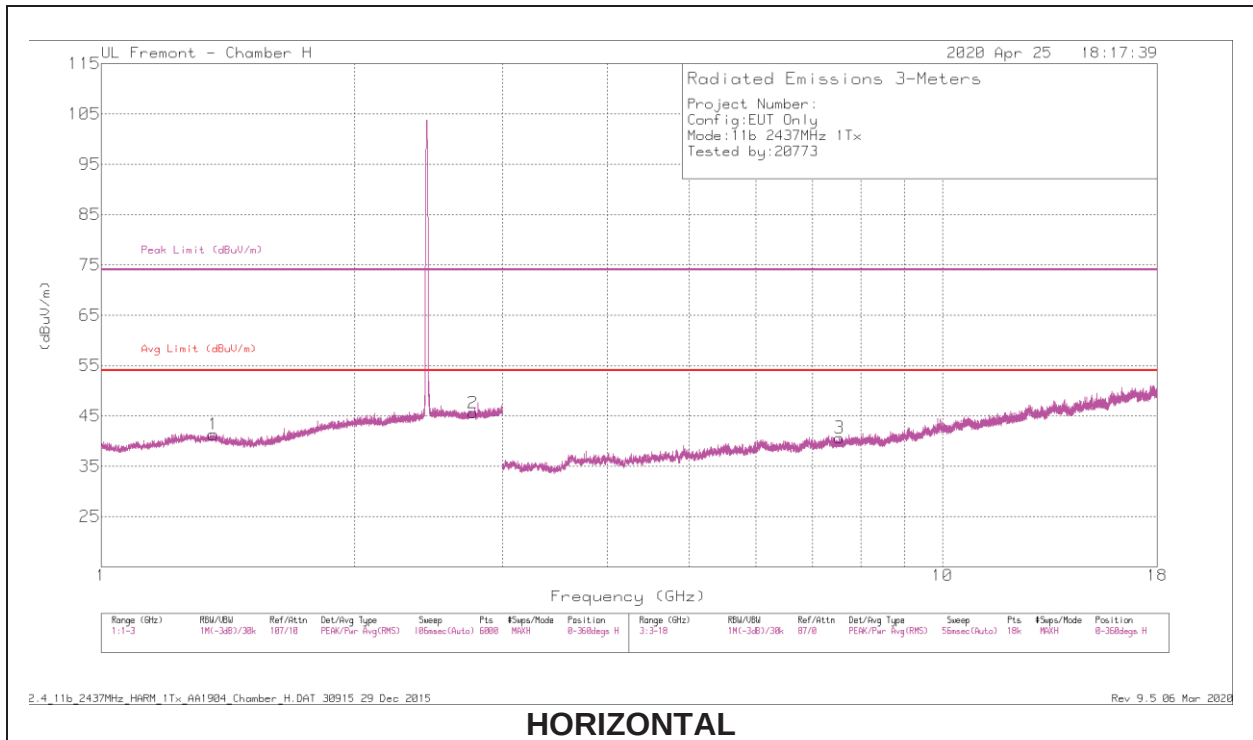

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.35914	44.9	PK2	29.1	-25.5	48.5	-	-	74	-25.5	289	115	H
	* 1.36058	33.33	MAV1	29.1	-25.5	36.93	54	-17.07	-	-	289	115	H
2	* 2.76594	44.7	PK2	32.2	-23.5	53.4	-	-	74	-20.6	354	131	H
	* 2.7621	32.58	MAV1	32.2	-23.5	41.28	54	-12.72	-	-	354	131	H
4	* 1.4842	45.18	PK2	27.8	-25.1	47.88	-	-	74	-26.12	262	138	V
	* 1.4815	33.17	MAV1	27.8	-25.1	35.87	54	-18.13	-	-	262	138	V
5	* 2.85529	44.79	PK2	32.4	-23.4	53.79	-	-	74	-20.21	226	189	V
	* 2.85546	32.42	MAV1	32.4	-23.4	41.42	54	-12.58	-	-	226	189	V
3	* 7.54667	39.24	PK2	36.1	-28.1	47.24	-	-	74	-26.76	163	250	H
	* 7.54428	28.12	MAV1	36.1	-28.1	36.12	54	-17.88	-	-	163	250	H
6	* 11.2153	36.95	PK2	37.9	-23.5	51.35	-	-	74	-22.65	354	255	V
	* 11.2137	25.91	MAV1	37.9	-23.5	40.31	54	-13.69	-	-	354	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

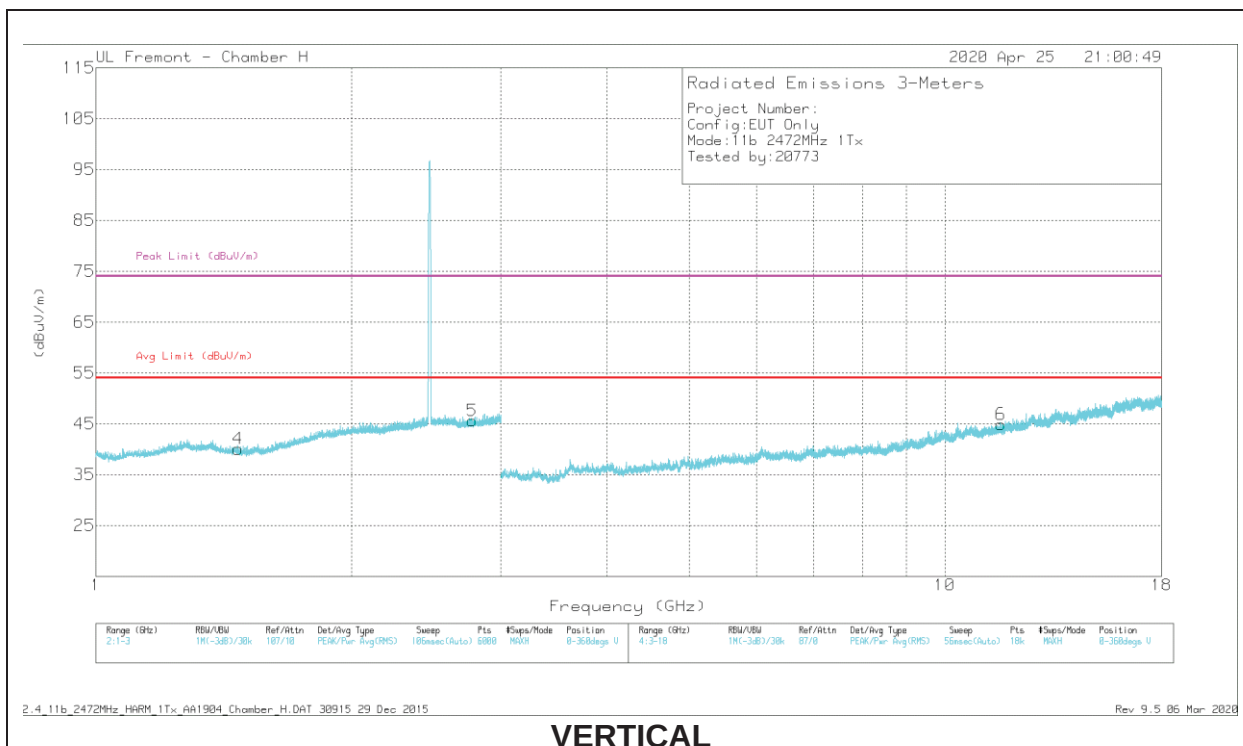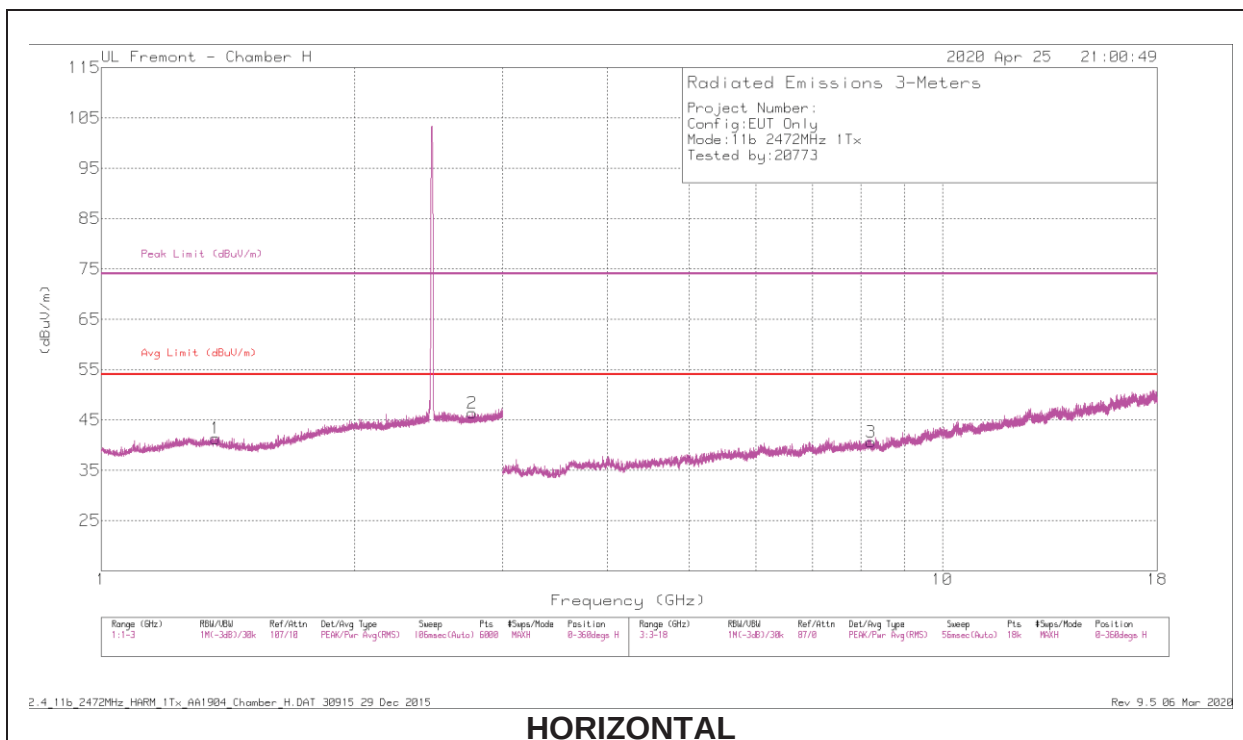

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.3683	45.13	PK2	29	-25.5	48.63	-	-	74	-25.37	20	176	H
	* 1.36984	33.34	MAv1	28.9	-25.4	36.84	54	-17.16	-	-	20	176	H
2	* 2.75976	44.56	PK2	32.2	-23.5	53.26	-	-	74	-20.74	287	191	H
	* 2.75965	32.64	MAv1	32.2	-23.5	41.34	54	-12.66	-	-	287	191	H
4	* 1.47031	44.69	PK2	27.9	-25.1	47.49	-	-	74	-26.51	190	333	V
	* 1.4685	33.22	MAv1	27.9	-25.2	35.92	54	-18.08	-	-	190	333	V
5	* 2.77802	43.76	PK2	32.3	-23.5	52.56	-	-	74	-21.44	202	166	V
	* 2.77737	32.58	MAv1	32.3	-23.5	41.38	54	-12.62	-	-	202	166	V
3	* 8.22951	38.12	PK2	36.1	-26.6	47.62	-	-	74	-26.38	116	106	H
	* 8.22679	27.03	MAv1	36.1	-26.6	36.53	54	-17.47	-	-	116	106	H
6	* 11.64862	37.03	PK2	38.4	-23.7	51.73	-	-	74	-22.27	104	214	V
	* 11.65154	25.77	MAv1	38.4	-23.7	40.47	54	-13.53	-	-	104	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

ANT 3

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

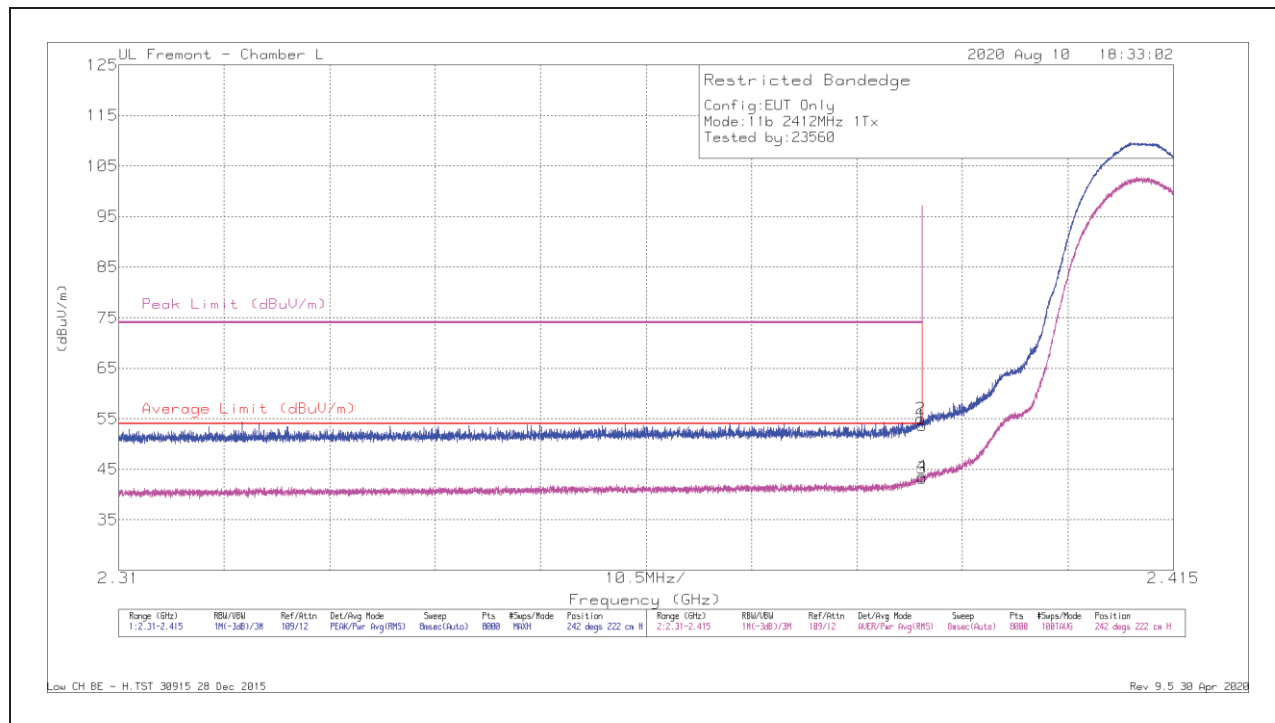

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.86	Pk	31.9	-13.1	53.66	-	-	74	-20.34	242	222	H
2	* 2.38983	36.19	Pk	31.9	-13.1	54.99	-	-	74	-19.01	242	222	H
3	* 2.39	24.39	RMS	31.9	-13.1	43.19	54	-10.81	-	-	242	222	H
4	* 2.38997	24.75	RMS	31.9	-13.1	43.55	54	-10.45	-	-	242	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

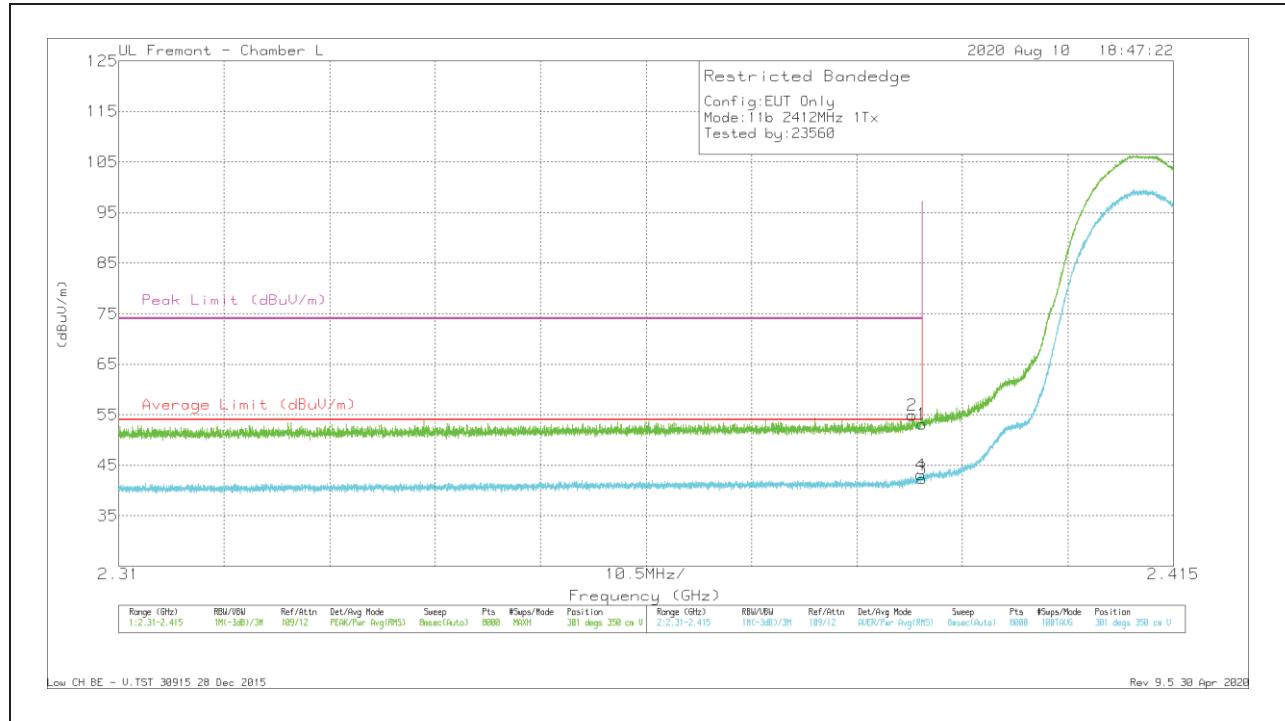

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.4	Pk	31.9	-13.1	53.2	-	-	74	-20.8	301	350	V
2	* 2.389	36.13	Pk	31.9	-13.1	54.93	-	-	74	-19.07	301	350	V
3	* 2.39	23.52	RMS	31.9	-13.1	42.32	54	-11.68	-	-	301	350	V
4	* 2.38985	24.32	RMS	31.9	-13.1	43.12	54	-10.88	-	-	301	350	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

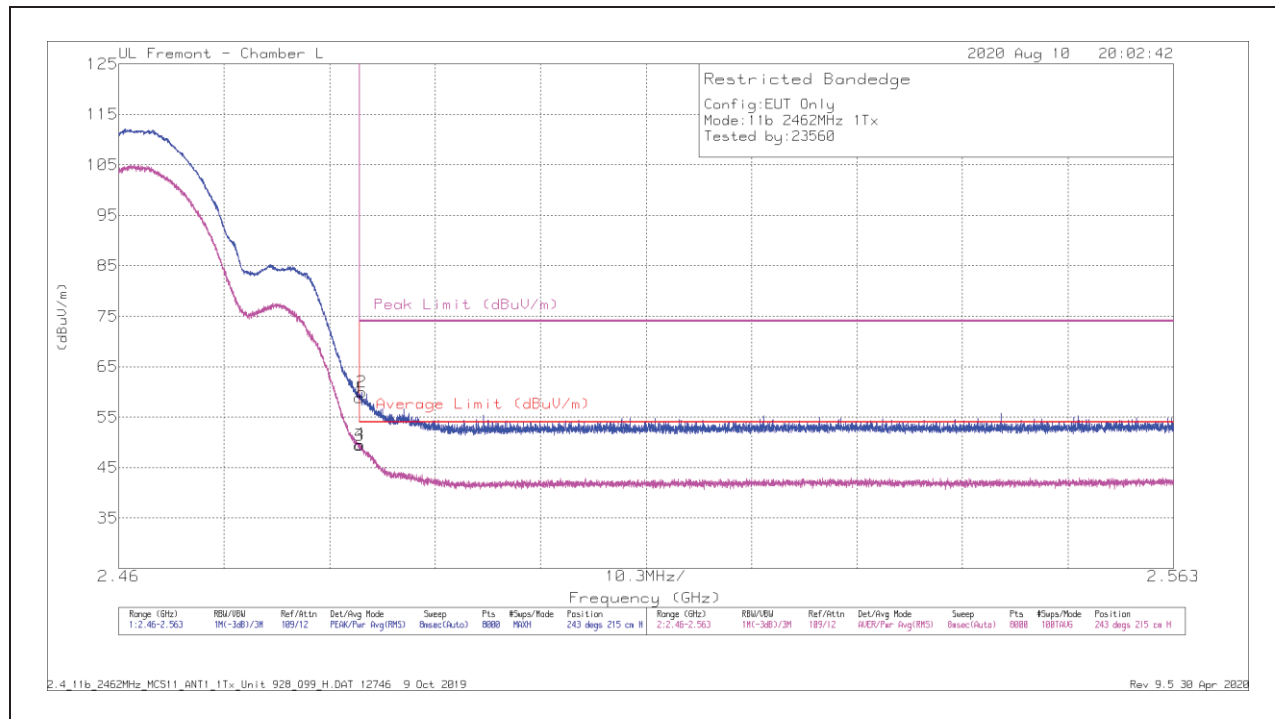


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	39.43	Pk	32.3	-12.9	58.83	-	-	74	-15.17	243	215	H
2	* 2.48372	40.59	Pk	32.3	-12.9	59.99	-	-	74	-14.01	243	215	H
3	* 2.4835	30	RMS	32.3	-12.9	49.4	54	-4.6	-	-	243	215	H
4	* 2.48355	30.21	RMS	32.3	-12.9	49.61	54	-4.39	-	-	243	215	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

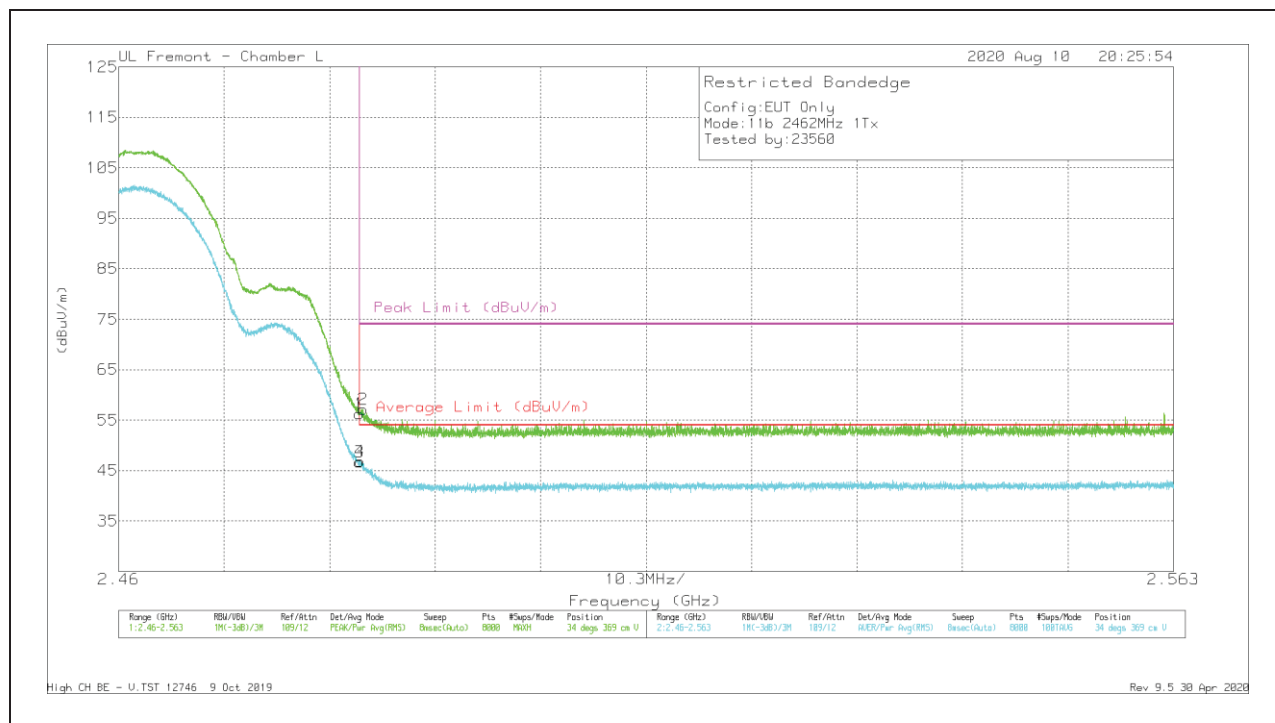

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	36.82	Pk	32.3	-12.9	56.22	-	-	74	-17.78	34	369	V
2	* 2.48385	37.69	Pk	32.3	-12.9	57.09	-	-	74	-16.91	34	369	V
3	* 2.4835	27.25	RMS	32.3	-12.9	46.65	54	-7.35	-	-	34	369	V
4	* 2.48358	27.38	RMS	32.3	-12.9	46.78	54	-7.22	-	-	34	369	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

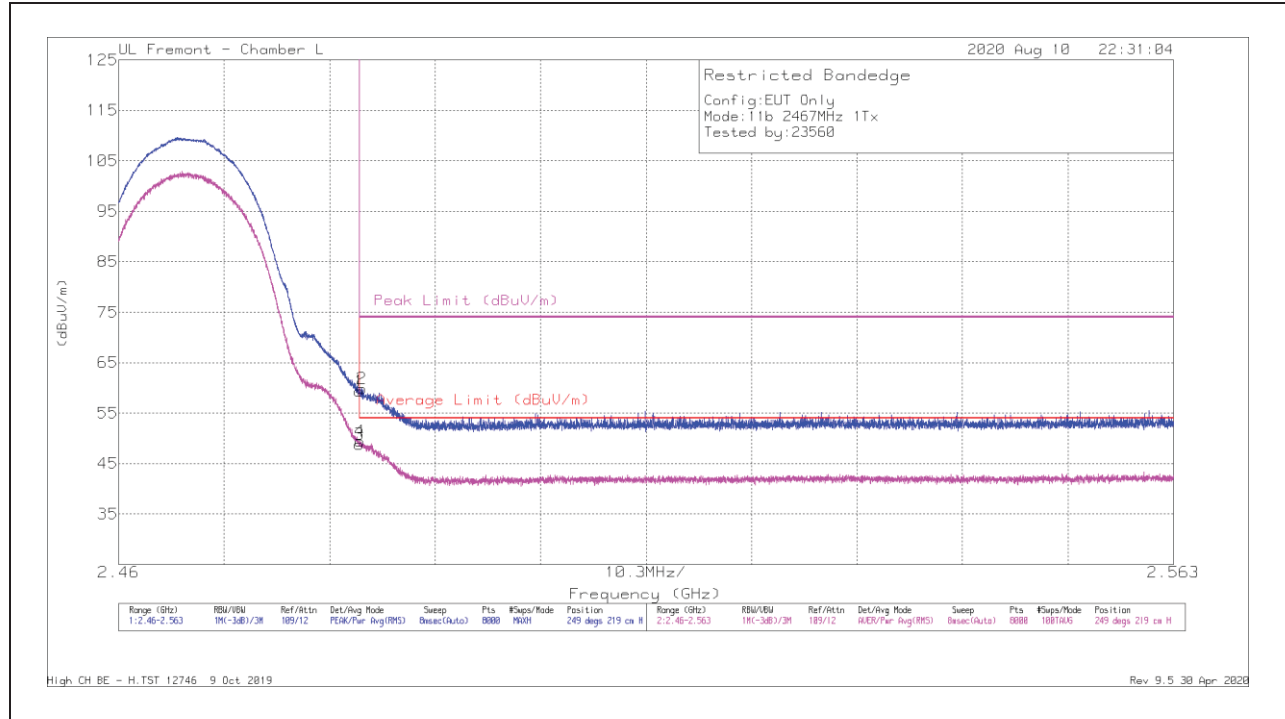


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	39.95	Pk	32.3	-12.9	59.35	-	-	74	-14.65	249	219	H
2	* 2.48376	40.42	Pk	32.3	-12.9	59.82	-	-	74	-14.18	249	219	H
3	* 2.4835	29.45	RMS	32.3	-12.9	48.85	54	-5.15	-	-	249	219	H
4	* 2.48355	30.07	RMS	32.3	-12.9	49.47	54	-4.53	-	-	249	219	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

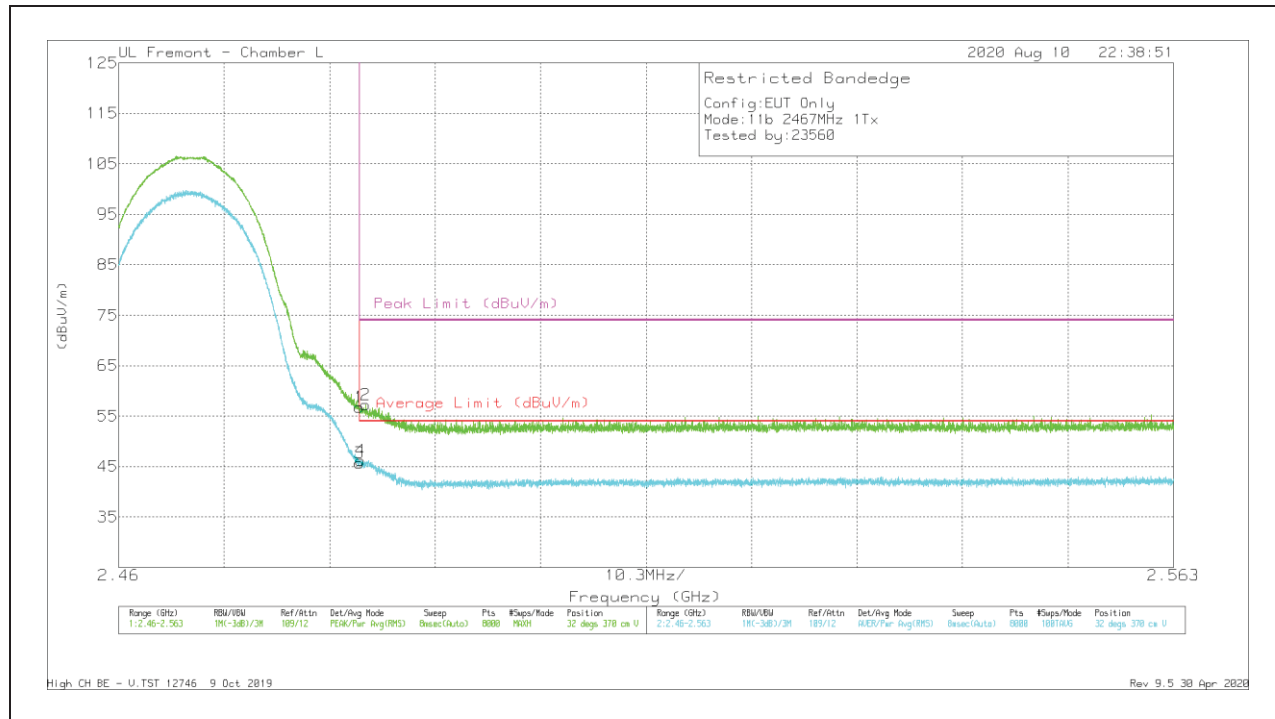

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	37.34	Pk	32.3	-12.9	56.74	-	-	74	-17.26	32	370	V
2	* 2.48412	37.9	Pk	32.3	-12.9	57.3	-	-	74	-16.7	32	370	V
3	* 2.4835	26.25	RMS	32.3	-12.9	45.65	54	-8.35	-	-	32	370	V
4	* 2.48363	26.78	RMS	32.3	-12.9	46.18	54	-7.82	-	-	32	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

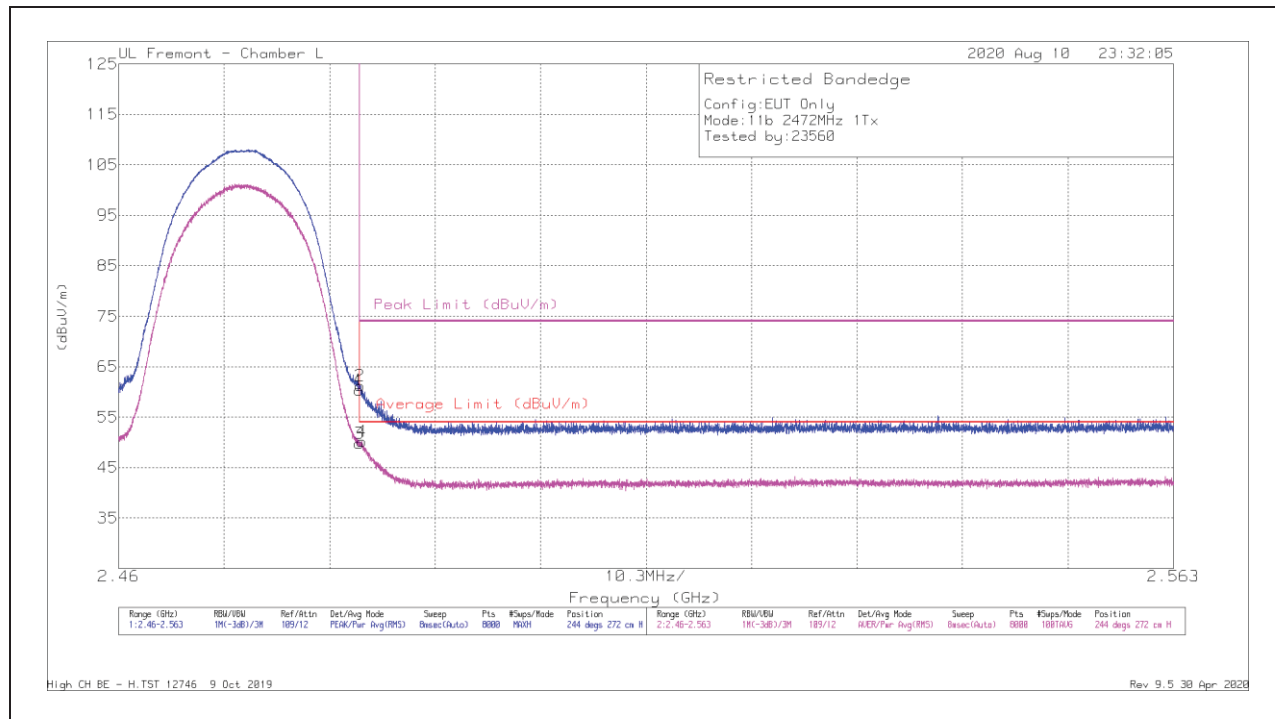


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	41	Pk	32.3	-12.9	60.4	-	-	74	-13.6	244	272	H
2	* 2.48355	41.86	Pk	32.3	-12.9	61.26	-	-	74	-12.74	244	272	H
3	* 2.4835	30.38	RMS	32.3	-12.9	49.78	54	-4.22	-	-	244	272	H
4	* 2.48372	30.78	RMS	32.3	-12.9	50.18	54	-3.82	-	-	244	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

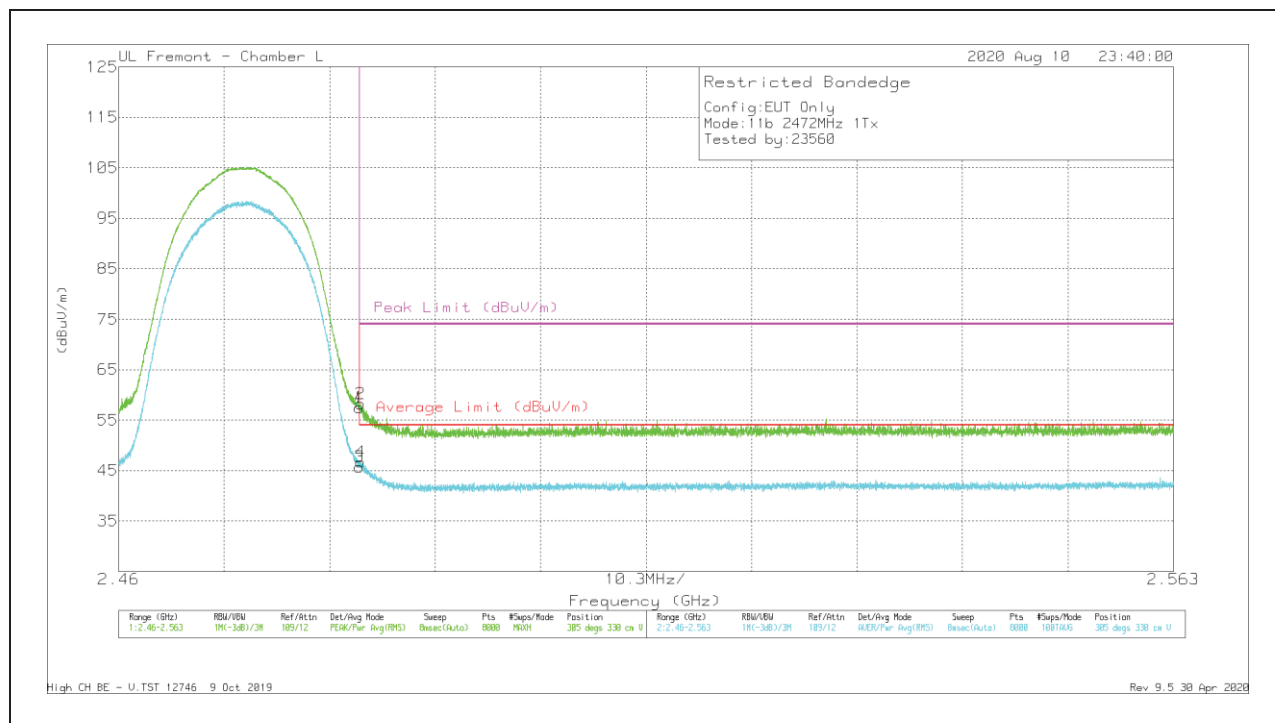

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	38.08	Pk	32.3	-12.9	57.48	-	-	74	-16.52	305	330	V
2	* 2.4836	38.8	Pk	32.3	-12.9	58.2	-	-	74	-15.8	305	330	V
3	* 2.4835	26.32	RMS	32.3	-12.9	45.72	54	-8.28	-	-	305	330	V
4	* 2.48362	27.27	RMS	32.3	-12.9	46.67	54	-7.33	-	-	305	330	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

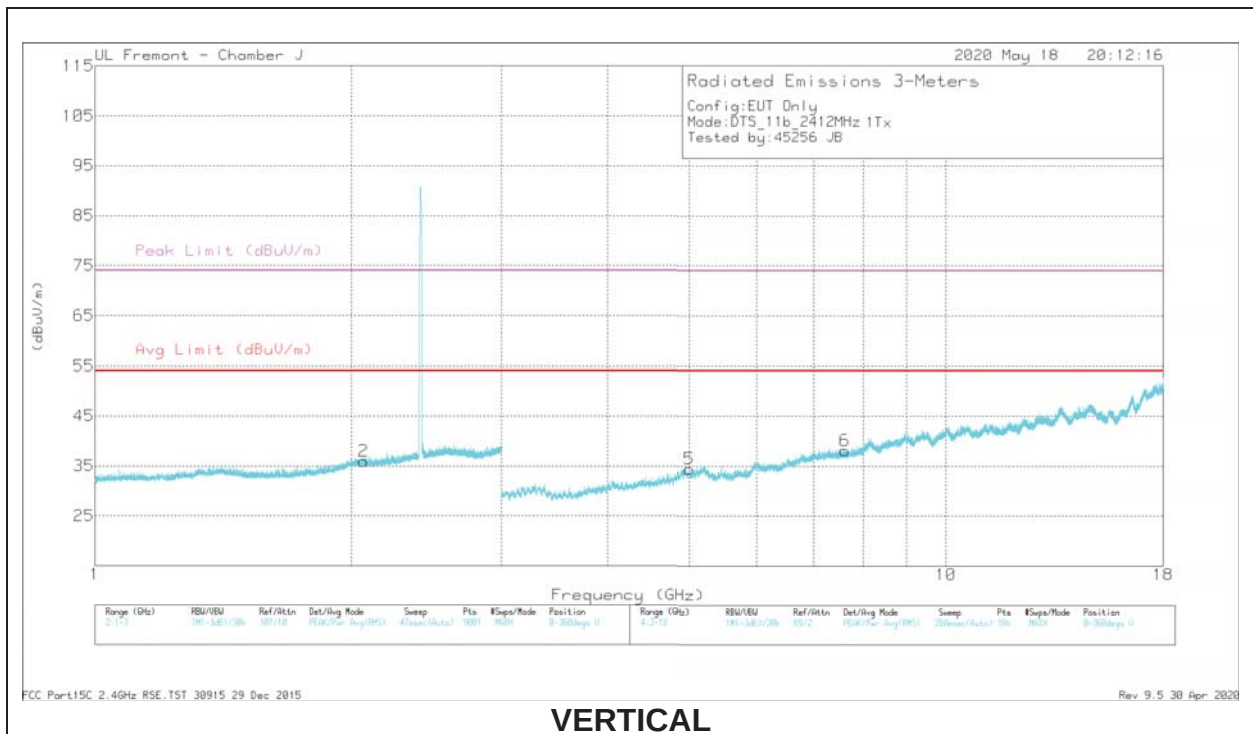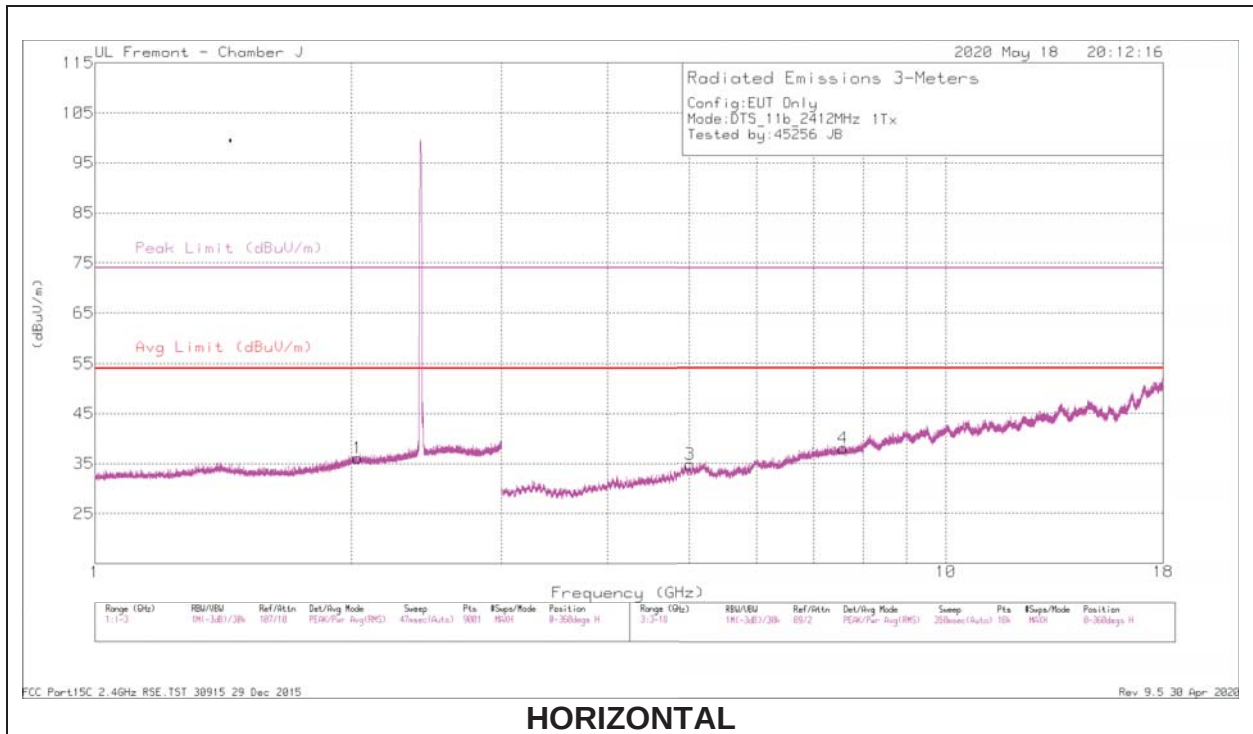



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.0345	43.31	PK2	27.9	-25.6	0	45.61	-	-	-	-	360	149	H
	2.03497	32.98	MAv1	27.9	-25.6	0	35.28	-	-	-	-	360	149	H
2	2.06698	44.2	PK2	27.9	-25.6	0	46.5	-	-	-	-	270	165	V
	2.0662	32.71	MAv1	27.9	-25.6	0	35.01	-	-	-	-	270	165	V
3	5.00552	37.36	PK2	34	-29.9	0	41.46	-	-	74	-32.54	180	289	H
	5.00768	27.21	MAv1	34	-30	0	31.21	54	-22.79	-	-	180	289	H
4	7.57346	35.92	PK2	37.1	-27.1	0	45.92	-	-	74	-28.08	271	371	H
	7.57348	25.36	MAv1	37.1	-27.1	0	35.36	54	-18.64	-	-	271	371	H
5	5.00018	38.28	PK2	34	-29.9	0	42.38	-	-	74	-31.62	49	163	V
	4.99945	28.09	MAv1	34	-29.9	0	32.19	54	-21.81	-	-	49	163	V
6	7.61567	36.69	PK2	37.1	-27	0	46.79	-	-	74	-27.21	358	155	V
	7.61378	25.83	MAv1	37.1	-27	0	35.93	54	-18.07	-	-	358	155	V

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

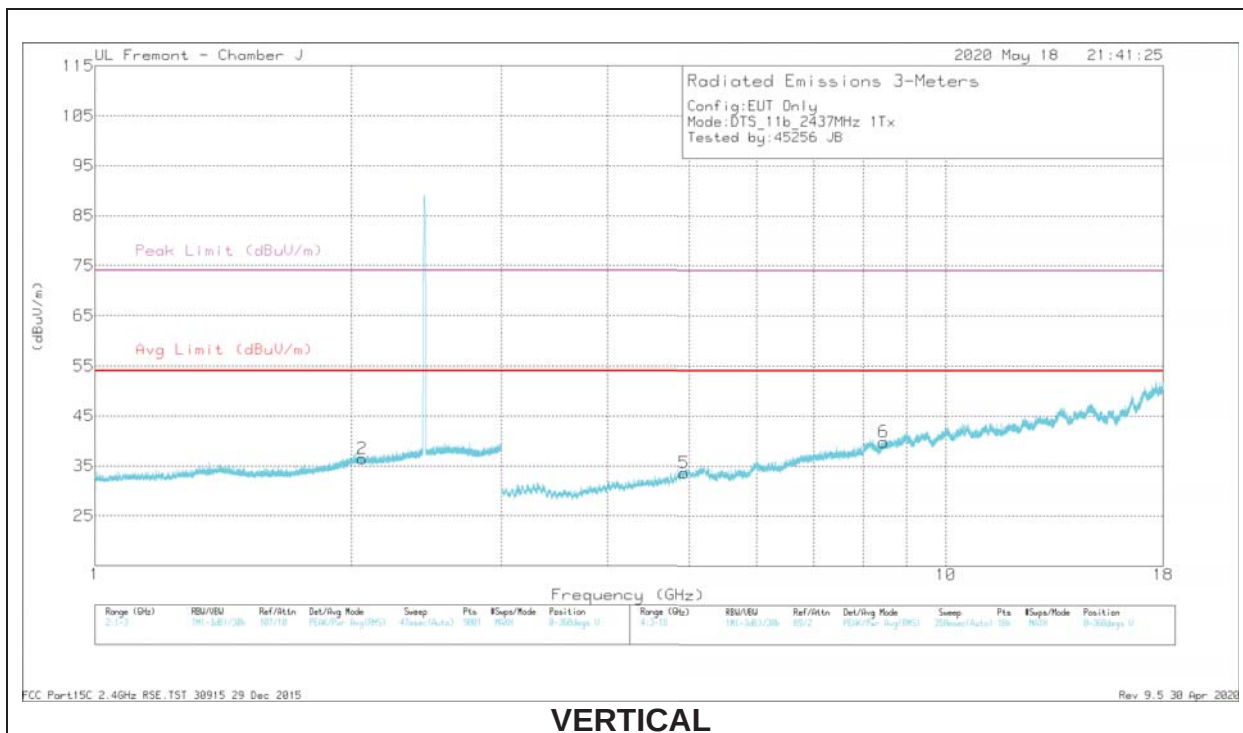
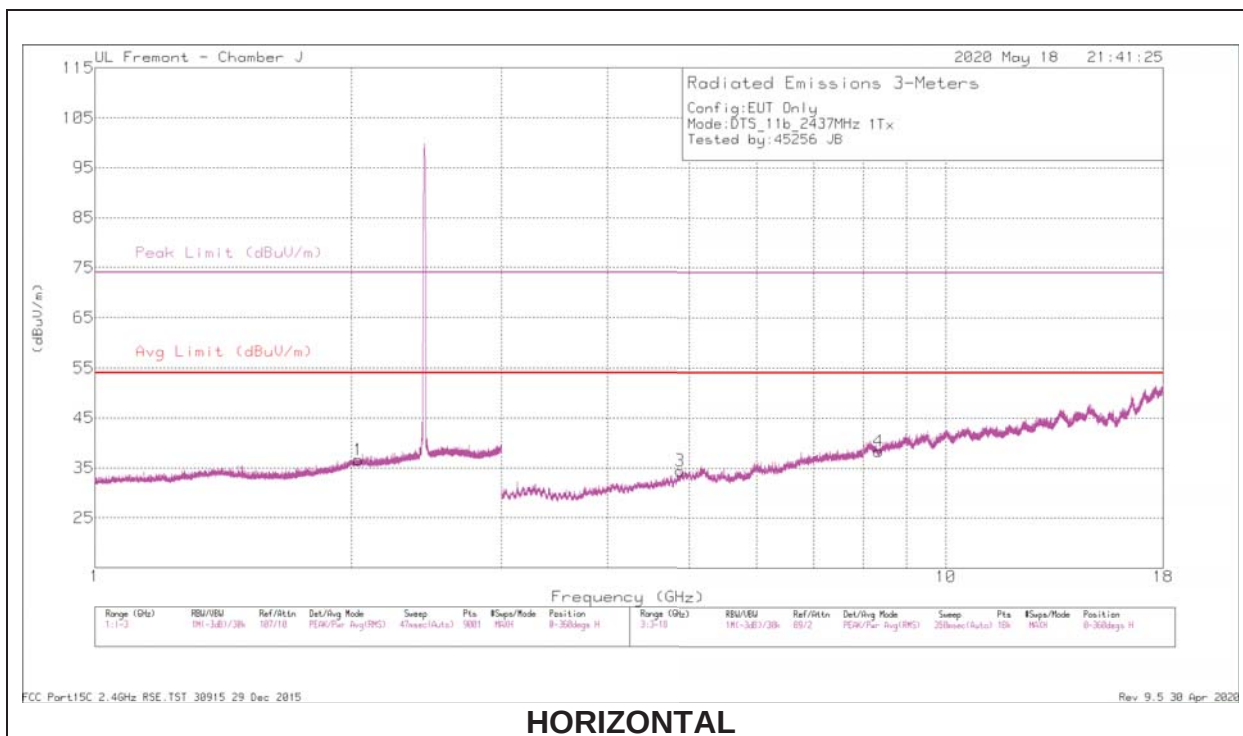


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.03773	43.55	PK2	27.9	-25.7	0	45.75	-	-	-	-	320	190	H
	2.04017	33.08	MAv1	27.9	-25.6	0	35.38	-	-	-	-	320	190	H
2	2.0621	43.75	PK2	27.9	-25.6	0	46.05	-	-	-	-	287	101	V
	2.05822	33.06	MAv1	27.9	-25.6	0	35.36	-	-	-	-	287	101	V
3	4.87536	39.69	PK2	33.6	-31	0	42.29	-	-	74	-31.71	106	280	H
	4.87302	28.47	MAv1	33.5	-31.1	0	30.87	54	-23.13	-	-	106	280	H
4	8.3358	34.54	PK2	37.9	-26.1	0	46.34	-	-	74	-27.66	105	374	H
	8.3398	25.13	MAv1	37.9	-26	0	37.03	54	-16.97	-	-	105	374	H
5	4.92769	38.34	PK2	33.7	-30.5	0	41.54	-	-	74	-32.46	354	168	V
	4.92928	28.2	MAv1	33.7	-30.4	0	31.5	54	-22.5	-	-	354	168	V
6	8.45036	34.83	PK2	37.8	-24.9	0	47.73	-	-	74	-26.27	174	250	V
	8.44841	24.69	MAv1	37.9	-24.9	0	37.69	54	-16.31	-	-	174	250	V

PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

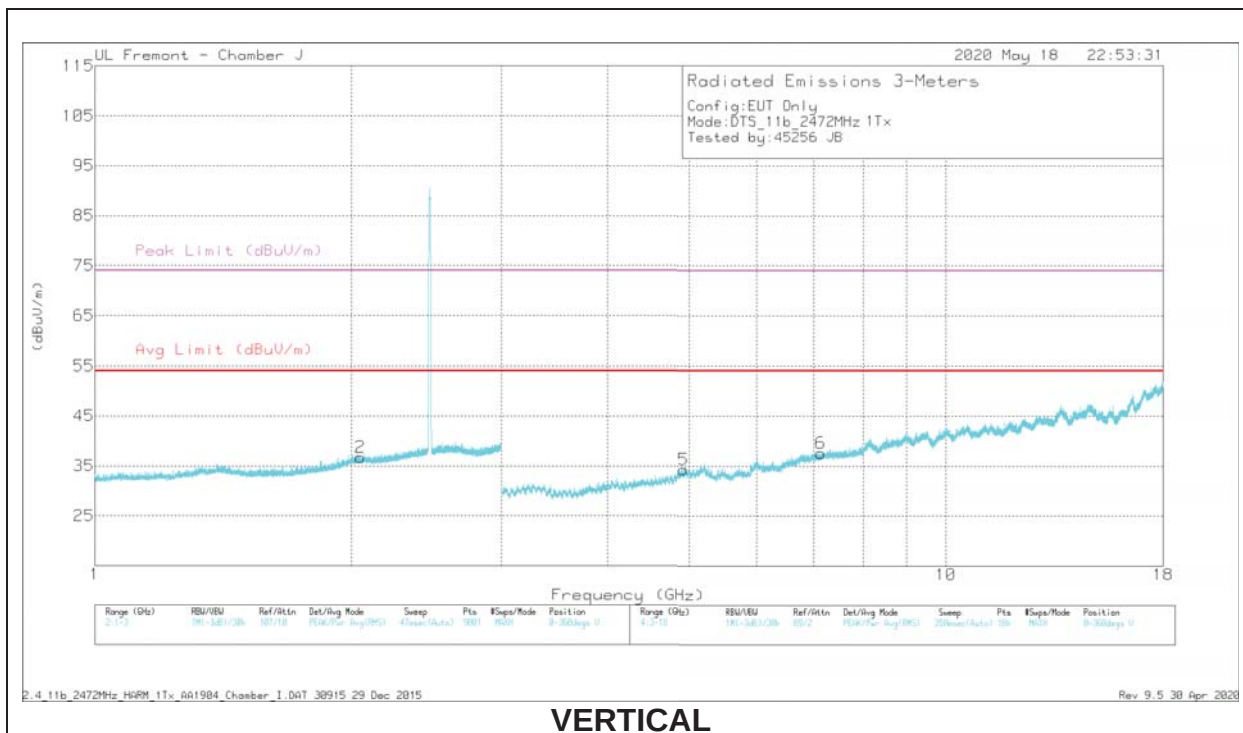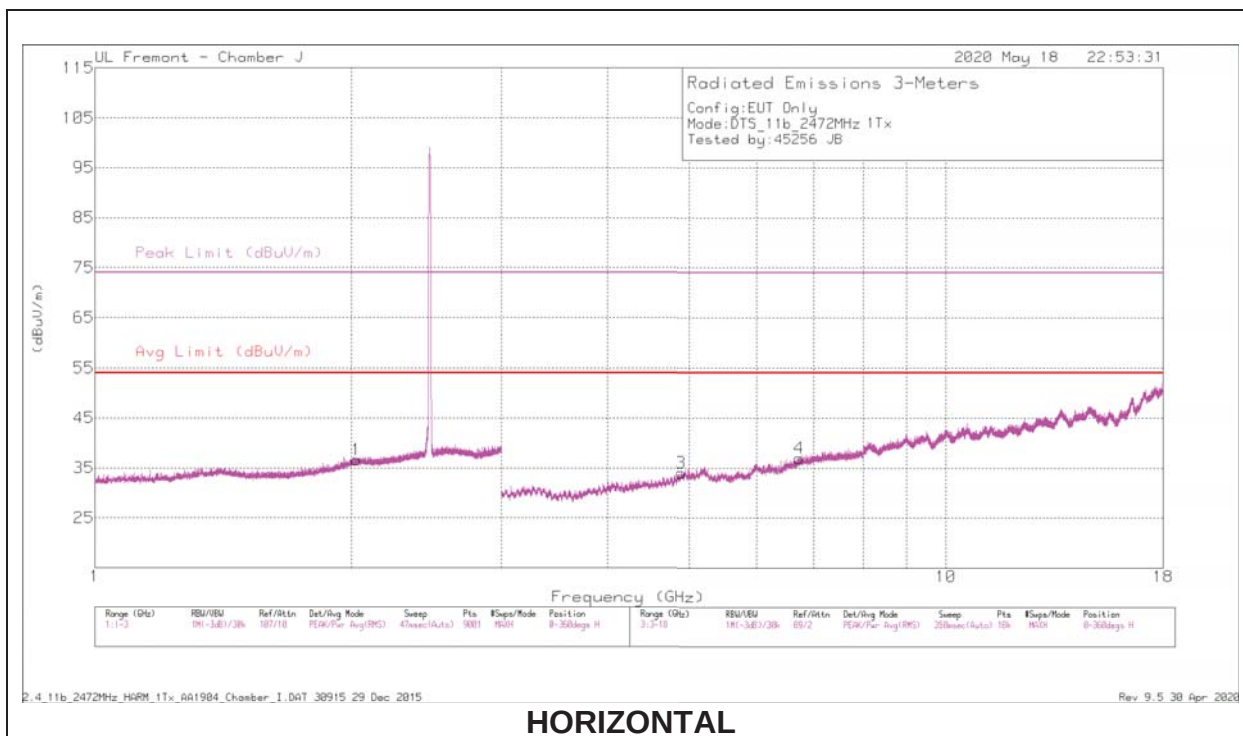

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.02939	43.24	PK2	27.9	-25.7	0	45.44	-	-	-	-	220	167	H
	2.02846	33.24	MAv1	27.9	-25.7	0	35.44	-	-	-	-	220	167	H
2	2.05103	43.9	PK2	27.9	-25.6	0	46.2	-	-	-	-	185	124	V
	2.05034	33.04	MAv1	27.9	-25.6	0	35.34	-	-	-	-	185	124	V
3	4.89197	39.48	PK2	33.6	-30.8	0	42.28	-	-	74	-31.72	261	232	H
	4.89119	28.91	MAv1	33.6	-30.8	0	31.71	54	-22.29	-	-	261	232	H
4	6.73435	36.59	PK2	36.2	-27.3	0	45.49	-	-	-	-	201	174	H
	6.73074	25.96	MAv1	36.2	-27.3	0	34.86	-	-	-	-	201	174	H
5	4.92512	38.82	PK2	33.7	-30.5	0	42.02	-	-	74	-31.98	96	302	V
	4.92324	28.44	MAv1	33.7	-30.5	0	31.64	54	-22.36	-	-	96	302	V
6	7.13558	36.7	PK2	36.8	-27	0	46.5	-	-	-	-	360	149	V
	7.13591	25.85	MAv1	36.8	-27	0	35.65	-	-	-	-	360	149	V


PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND

ANT 4

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

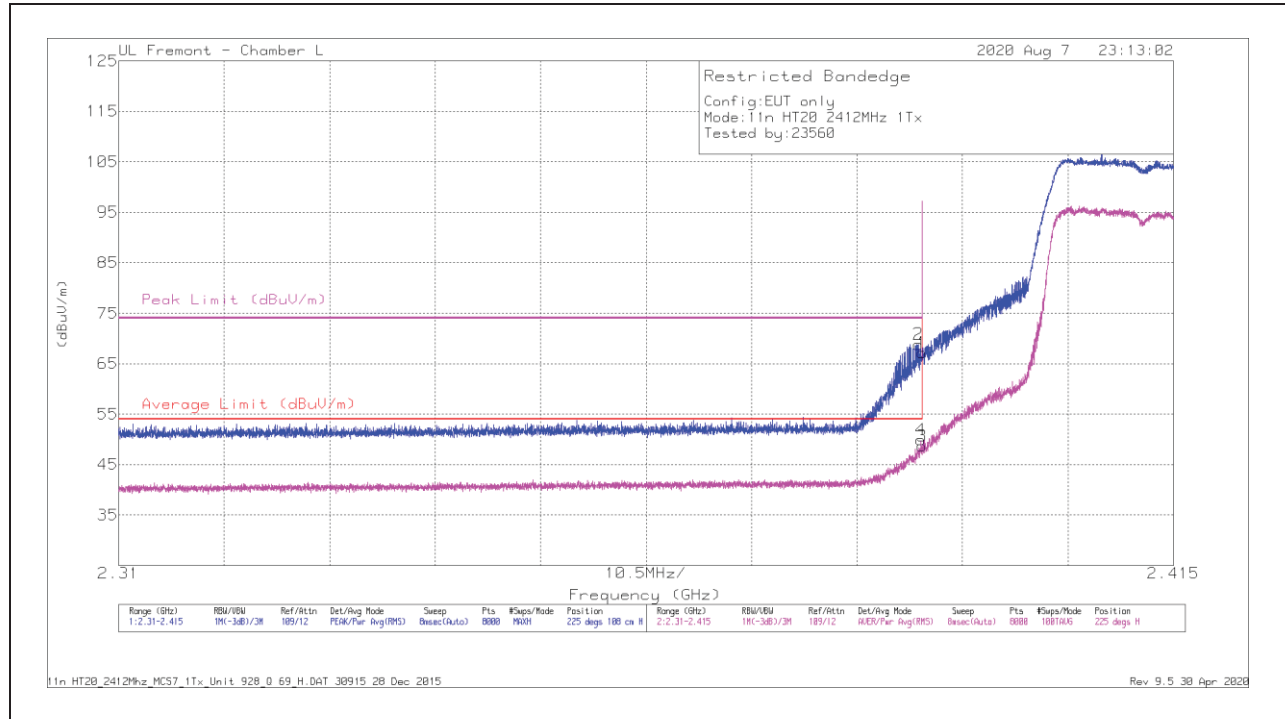

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.35	PK	31.9	-13.1	0	67.15	-	-	74	-6.85	225	108	H
2	* 2.38958	50.05	PK	31.9	-13.1	0	68.85	-	-	74	-5.15	225	108	H
3	* 2.39	29.51	RMS	31.9	-13.1	.36	48.67	54	-5.33	-	-	225	108	H
4	* 2.38988	30.71	RMS	31.9	-13.1	.36	49.87	54	-4.13	-	-	225	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

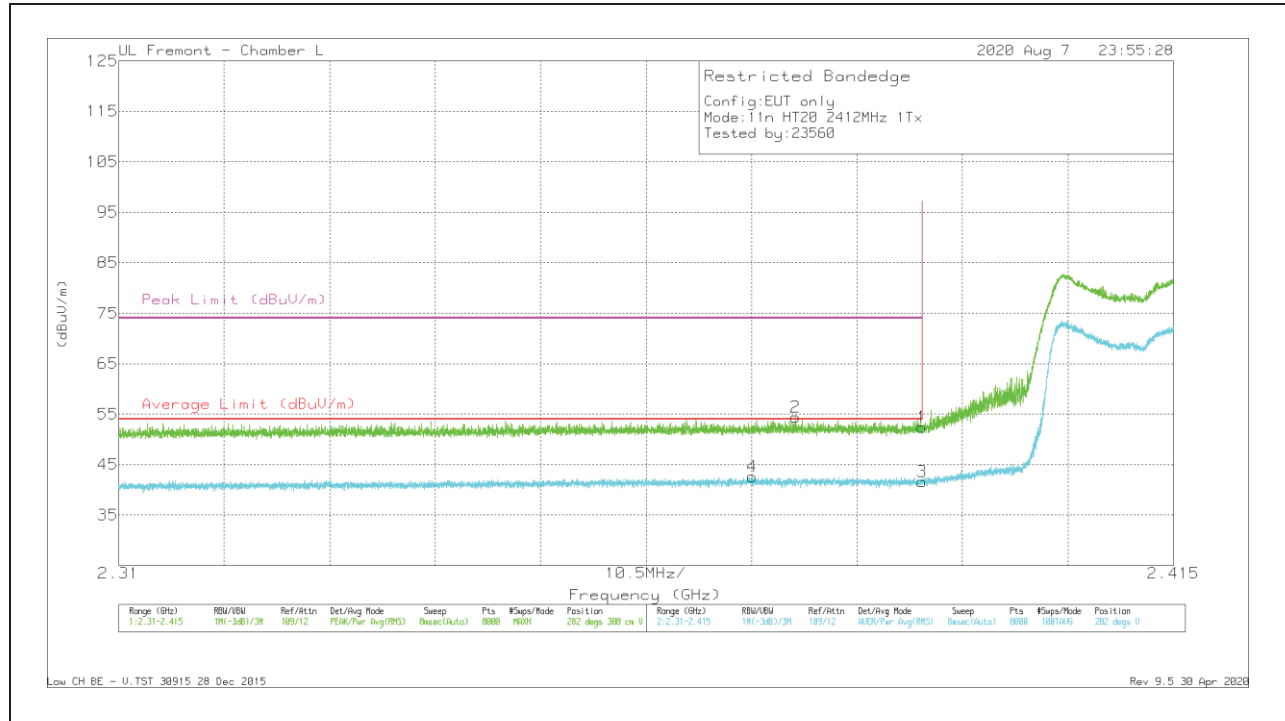


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	33.57	Pk	31.9	-13.1	0	52.37	-	-	74	-21.63	282	308	V
2	* 2.37735	35.61	Pk	31.8	-13	0	54.41	-	-	74	-19.59	282	308	V
3	* 2.39	22.49	RMS	31.9	-13.1	.36	41.65	54	-12.35	-	-	282	308	V
4	* 2.37308	23.38	RMS	31.8	-13	.36	42.54	54	-11.46	-	-	282	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

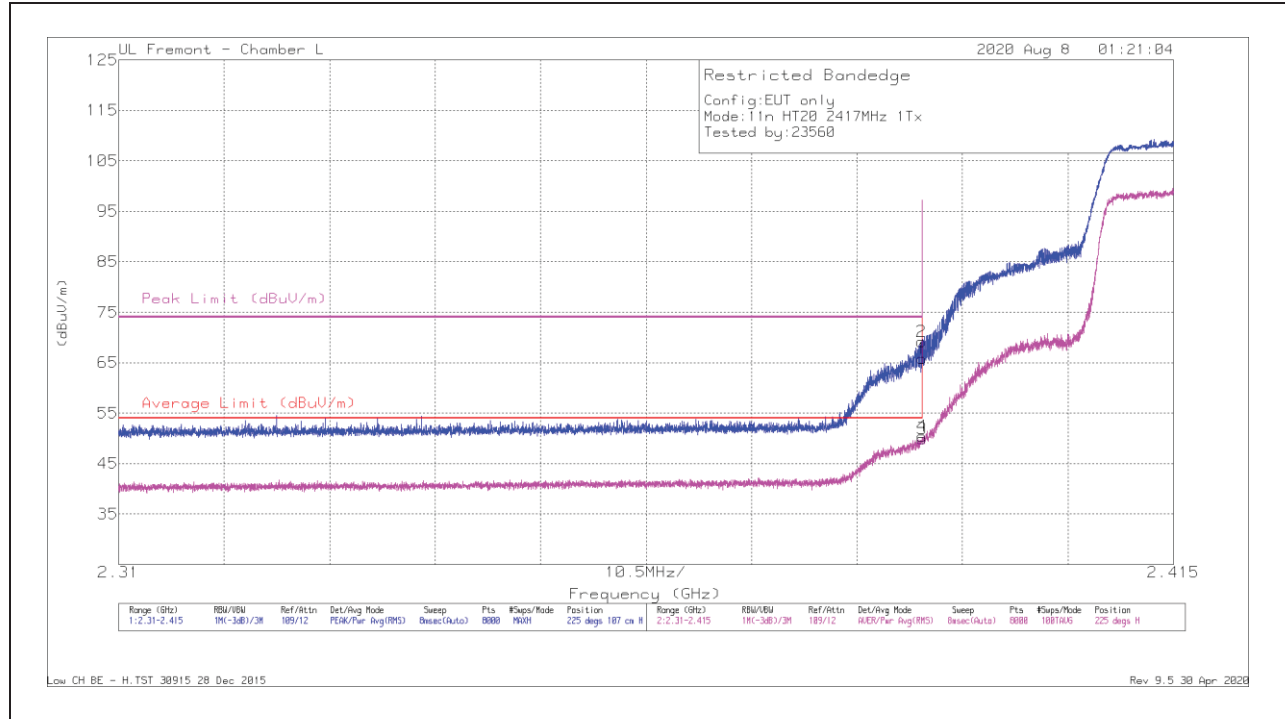


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.01	Pk	31.9	-13.1	0	65.81	-	-	74	-8.19	225	107	H
2	* 2.38989	50.34	Pk	31.9	-13.1	0	69.14	-	-	74	-4.86	225	107	H
3	* 2.39	30.73	RMS	31.9	-13.1	-36	49.89	54	-4.11	-	-	225	107	H
4	* 2.38997	31.22	RMS	31.9	-13.1	-36	50.38	54	-3.62	-	-	225	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

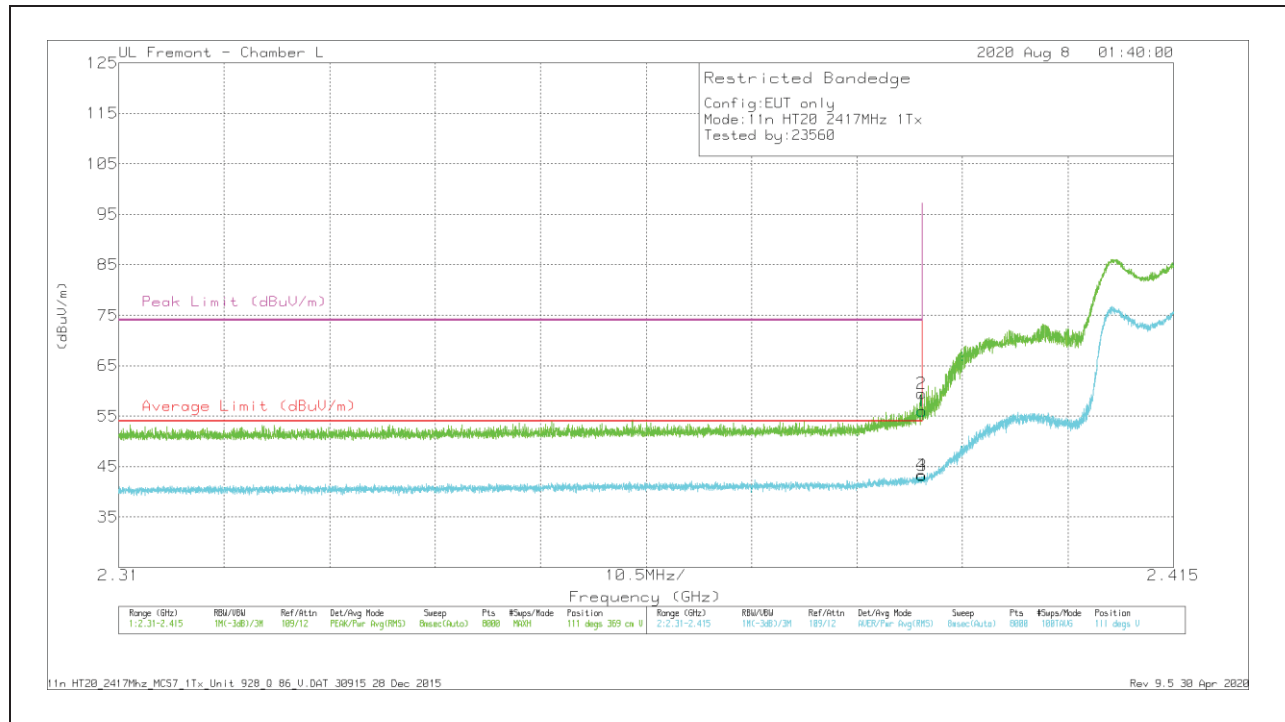


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.25	Pk	31.9	-13.1	0	56.05	-	-	74	-17.95	111	369	V
2	* 2.3899	40.67	Pk	31.9	-13.1	0	59.47	-	-	74	-14.53	111	369	V
3	* 2.39	24.04	RMS	31.9	-13.1	.36	43.2	54	-10.8	-	-	111	369	V
4	* 2.38993	24.21	RMS	31.9	-13.1	.36	43.37	54	-10.63	-	-	111	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

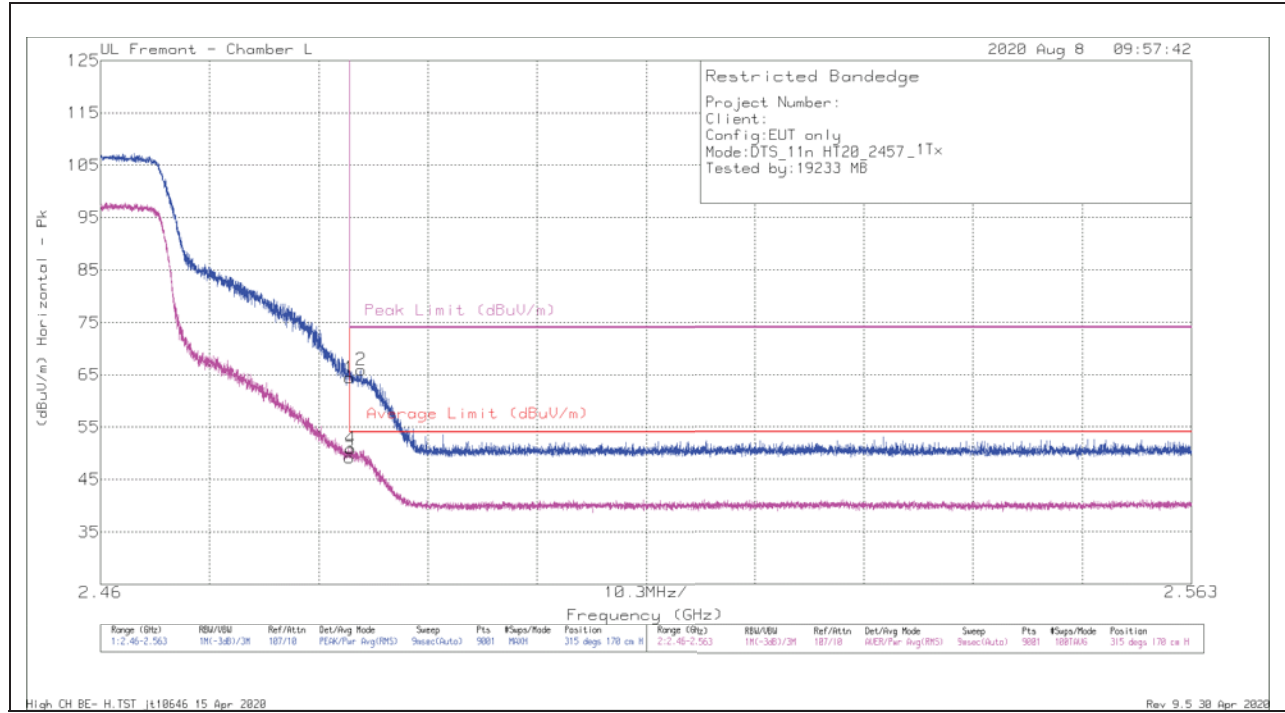

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.99	Pk	32.3	-20.9	0	64.39	-	-	74	-9.61	315	170	H
2	* 2.48459	54.54	Pk	32.3	-20.9	0	65.94	-	-	74	-8.06	315	170	H
3	* 2.48351	37.47	RMS	32.3	-20.9	.36	49.23	54	-4.77	-	-	315	170	H
4	* 2.48361	39.1	RMS	32.3	-20.9	.36	50.86	54	-3.14	-	-	315	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

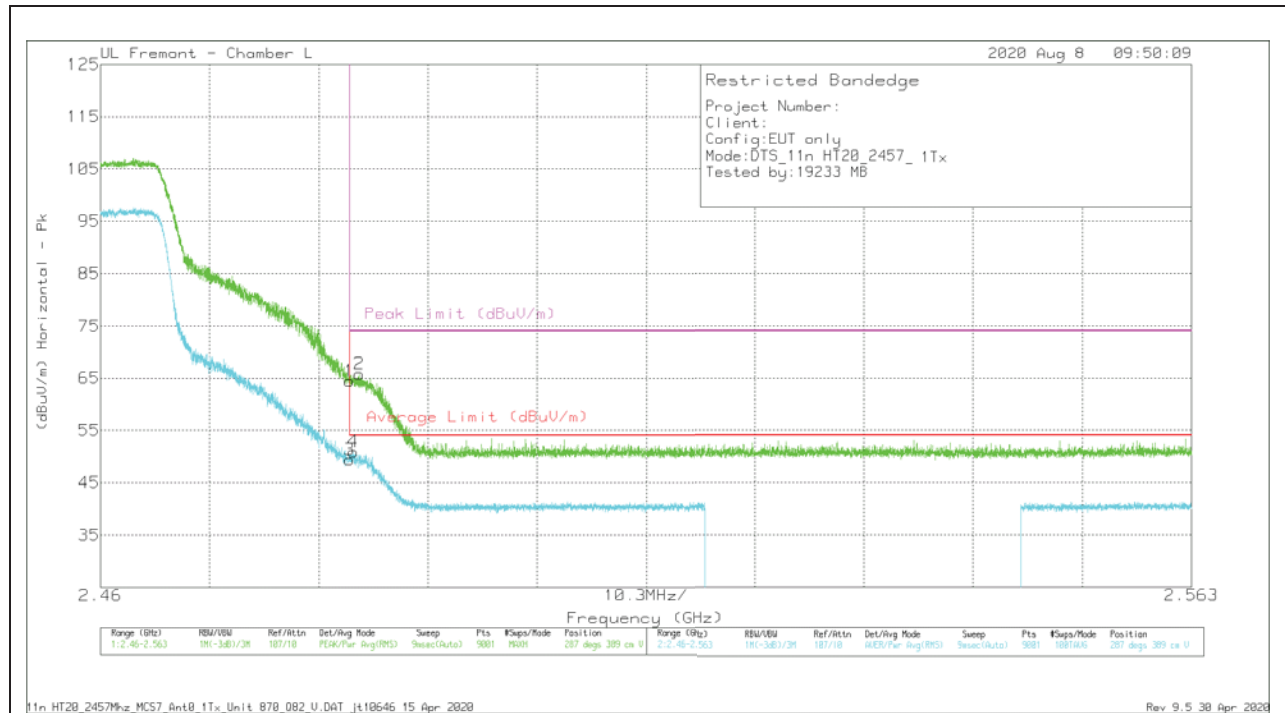


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.09	Pk	32.3	-20.9	0	64.49	-	-	74	-9.51	287	389	V
2	* 2.48442	54.38	Pk	32.3	-20.9	0	65.78	-	-	74	-8.22	287	389	V
3	* 2.48351	37.64	RMS	32.3	-20.9	-36	49.4	54	-4.6	-	-	287	389	V
4	* 2.48385	39.17	RMS	32.3	-20.9	-36	50.93	54	-3.07	-	-	287	389	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

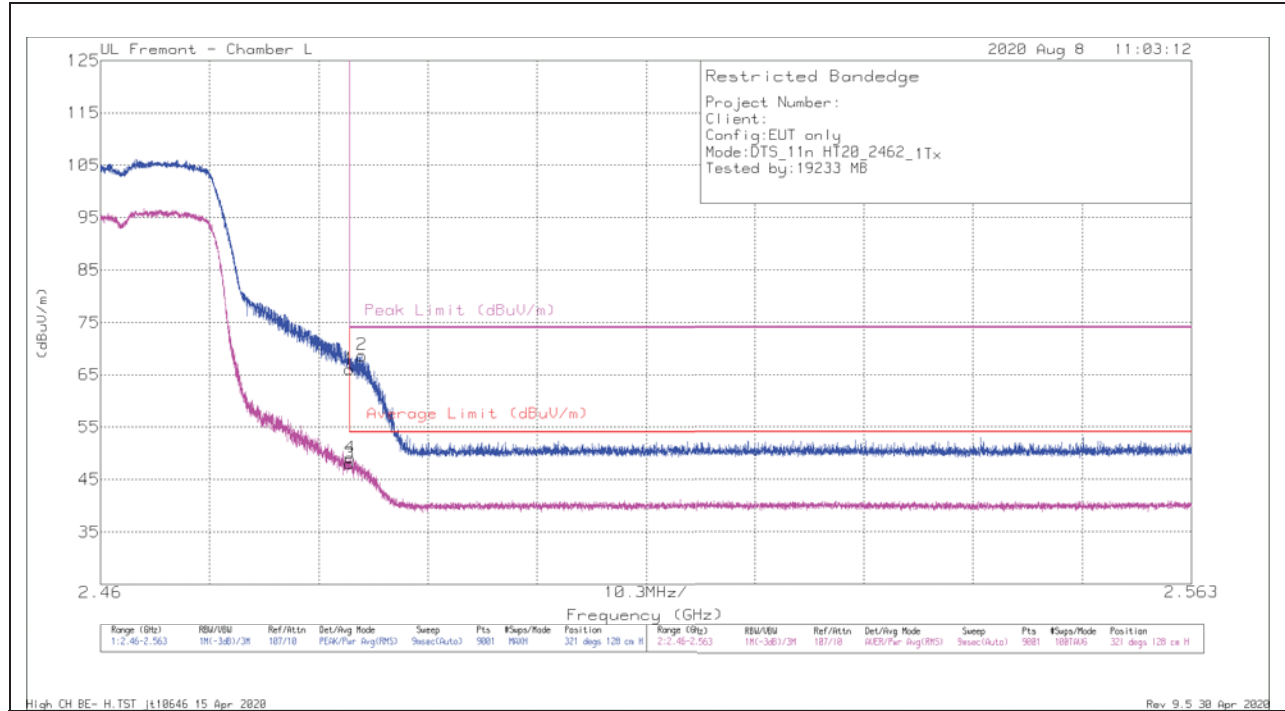

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.69	Pk	32.3	-20.9	0	66.09	-	-	74	-7.91	321	128	H
2	* 2.48468	57.33	Pk	32.3	-20.9	0	68.73	-	-	74	-5.27	321	128	H
3	* 2.48351	36.35	RMS	32.3	-20.9	.36	48.11	54	-5.89	-	-	321	128	H
4	* 2.48357	37.41	RMS	32.3	-20.9	.36	49.17	54	-4.83	-	-	321	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

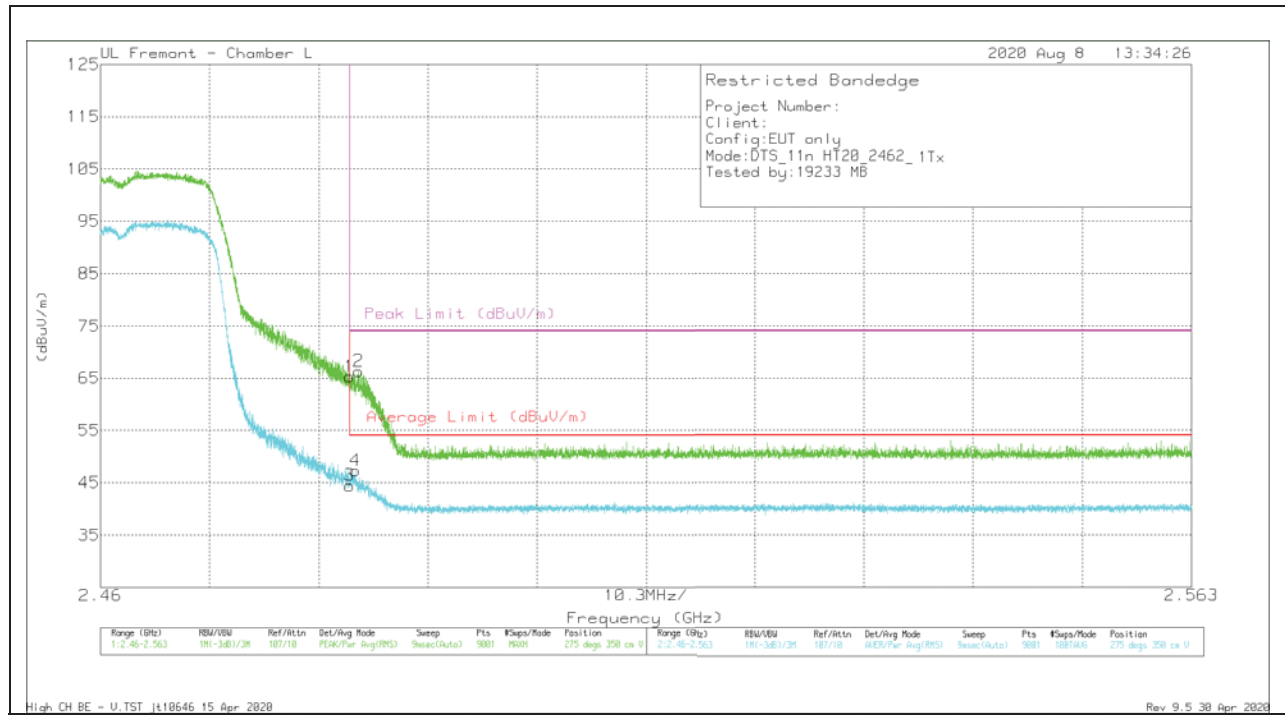


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.95	Pk	32.3	-20.9	0	65.35	-	-	74	-8.65	275	350	V
2	* 2.48434	54.86	Pk	32.3	-20.9	0	66.26	-	-	74	-7.74	275	350	V
3	* 2.48351	32.69	RMS	32.3	-20.9	-36	44.45	54	-9.55	-	-	275	350	V
4	* 2.48403	35.5	RMS	32.3	-20.9	-36	47.26	54	-6.74	-	-	275	350	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

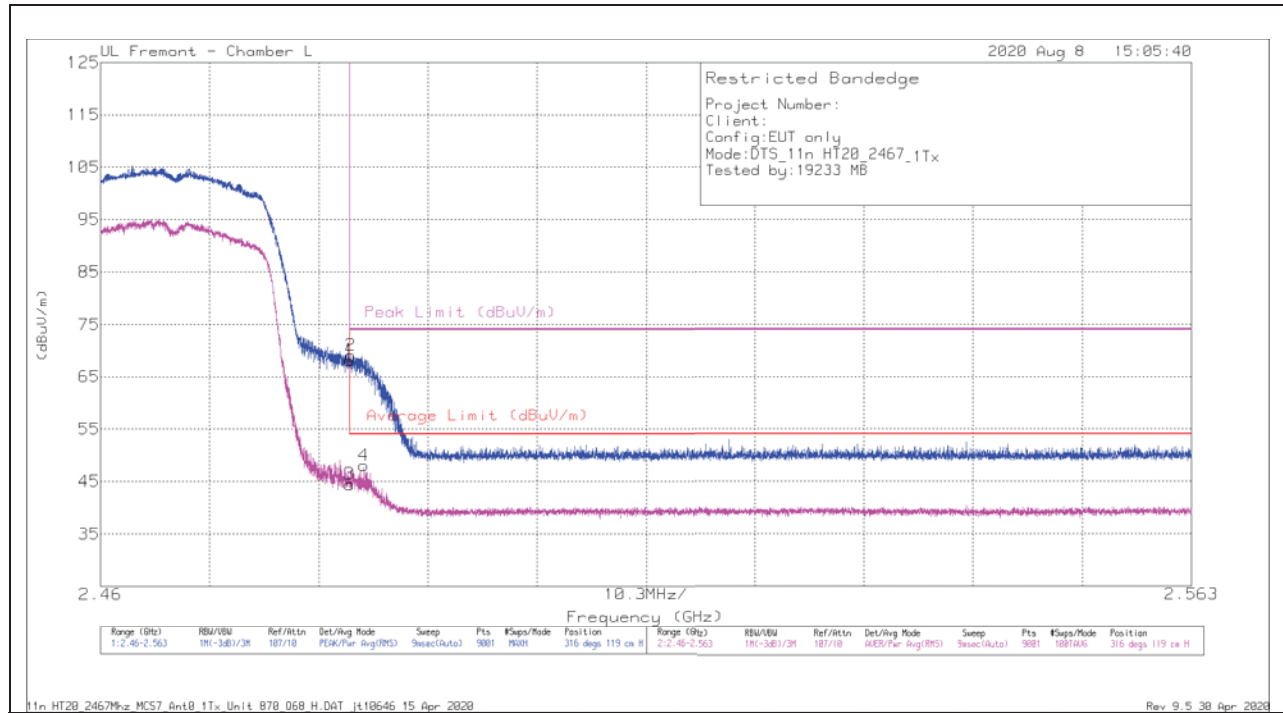

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.74	Pk	32.3	-20.9	0	68.14	-	-	74	-5.86	316	119	H
2	* 2.4836	57.69	Pk	32.3	-20.9	0	69.09	-	-	74	-4.91	316	119	H
3	* 2.48351	32.72	RMS	32.3	-20.9	.36	44.48	54	-9.52	-	-	316	119	H
4	* 2.48483	36.24	RMS	32.3	-20.9	.36	48	54	-6	-	-	316	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

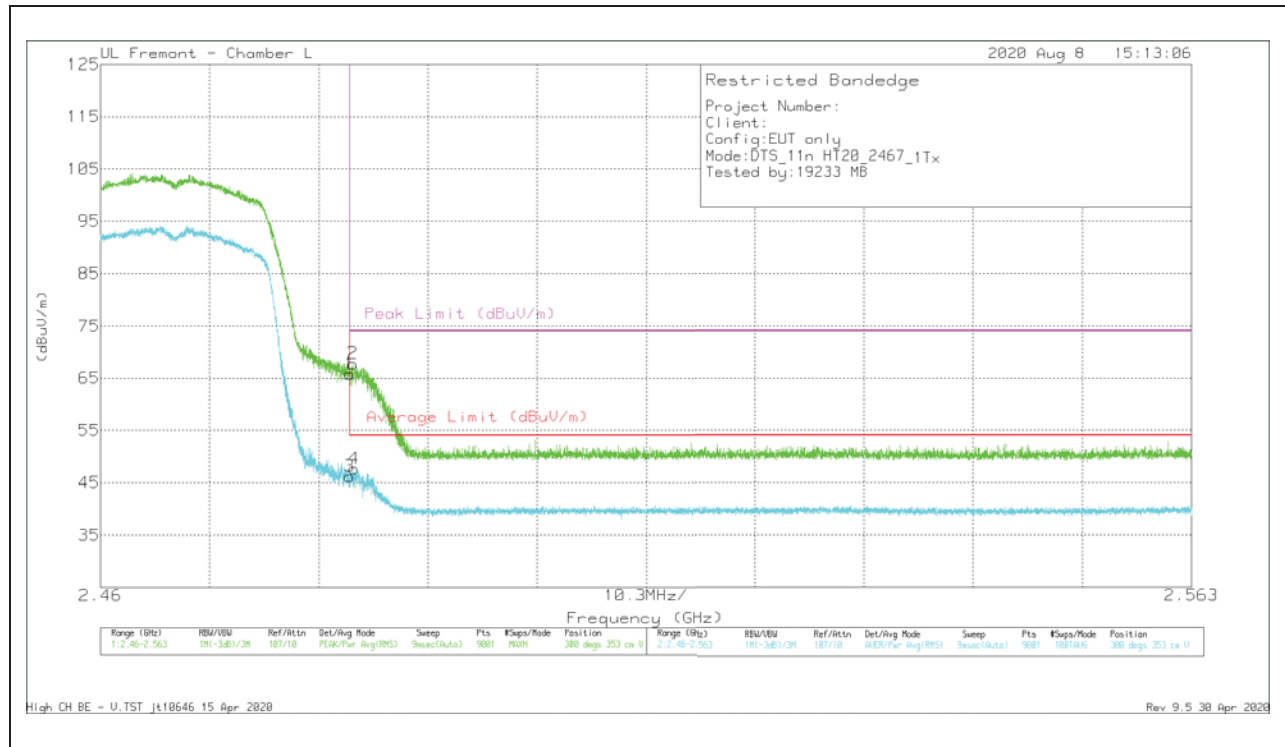


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.46	Pk	32.3	-20.9	0	65.86	-	-	74	-8.14	300	353	V
2	* 2.48382	56.38	Pk	32.3	-20.9	0	67.78	-	-	74	-6.22	300	353	V
3	* 2.48351	34.8	RMS	32.3	-20.9	36	46.56	54	-7.44	-	-	300	353	V
4	* 2.48392	36.27	RMS	32.3	-20.9	36	48.03	54	-5.97	-	-	300	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

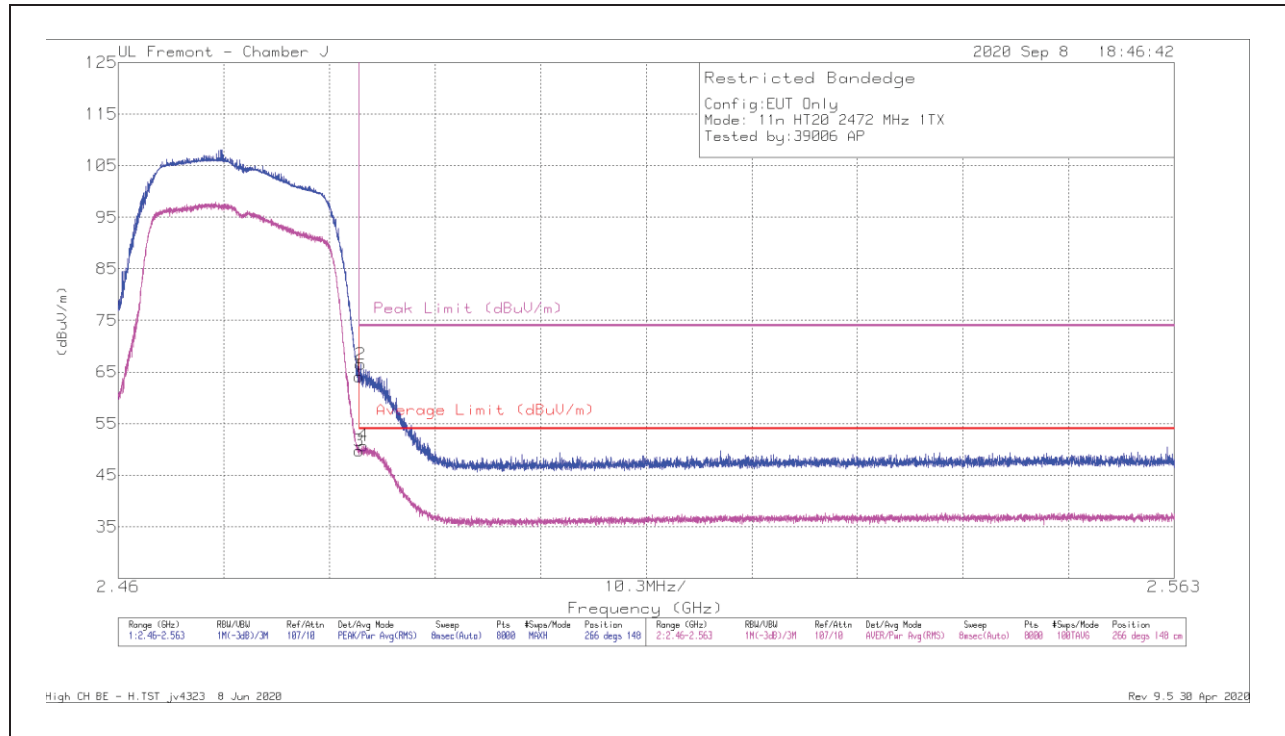


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Ampl/Cbl/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.82	Pk	29.5	-14.2	0	64.12	-	-	74	-9.88	266	148	H
2	* 2.48364	51.21	Pk	29.5	-14.2	0	66.51	-	-	74	-7.49	266	148	H
3	* 2.4835	34.43	RMS	29.5	-14.2	.36	50.09	54	-3.91	-	-	266	148	H
4	* 2.48394	35.43	RMS	29.5	-14.2	.36	51.09	54	-2.91	-	-	266	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

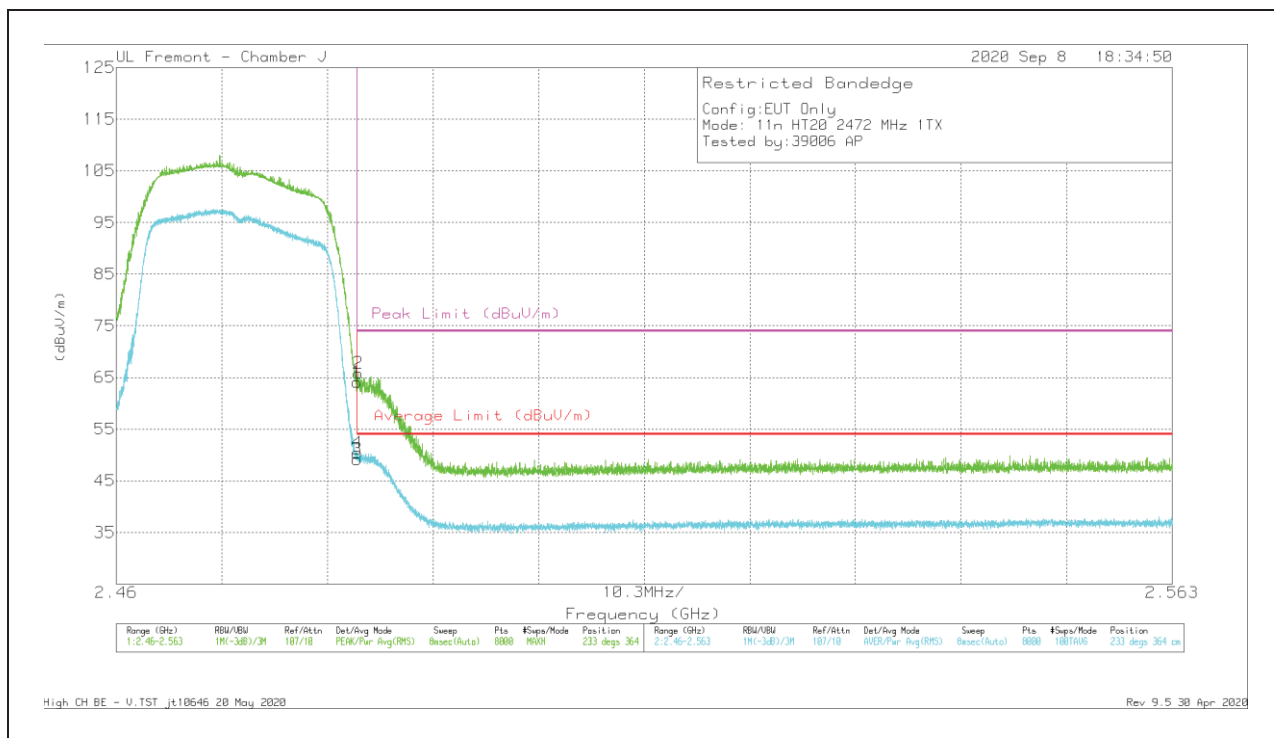

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Ampl/Cbll/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.78	Pk	29.5	-14.2	0	64.08	-	-	74	-9.92	233	364	V
2	* 2.48359	50.5	Pk	29.5	-14.2	0	65.8	-	-	74	-8.2	233	364	V
3	* 2.4835	33.88	RMS	29.5	-14.2	.36	49.54	54	-4.46	-	-	233	364	V
4	* 2.48351	35.1	RMS	29.5	-14.2	.36	50.76	54	-3.24	-	-	233	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

ANT 3

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

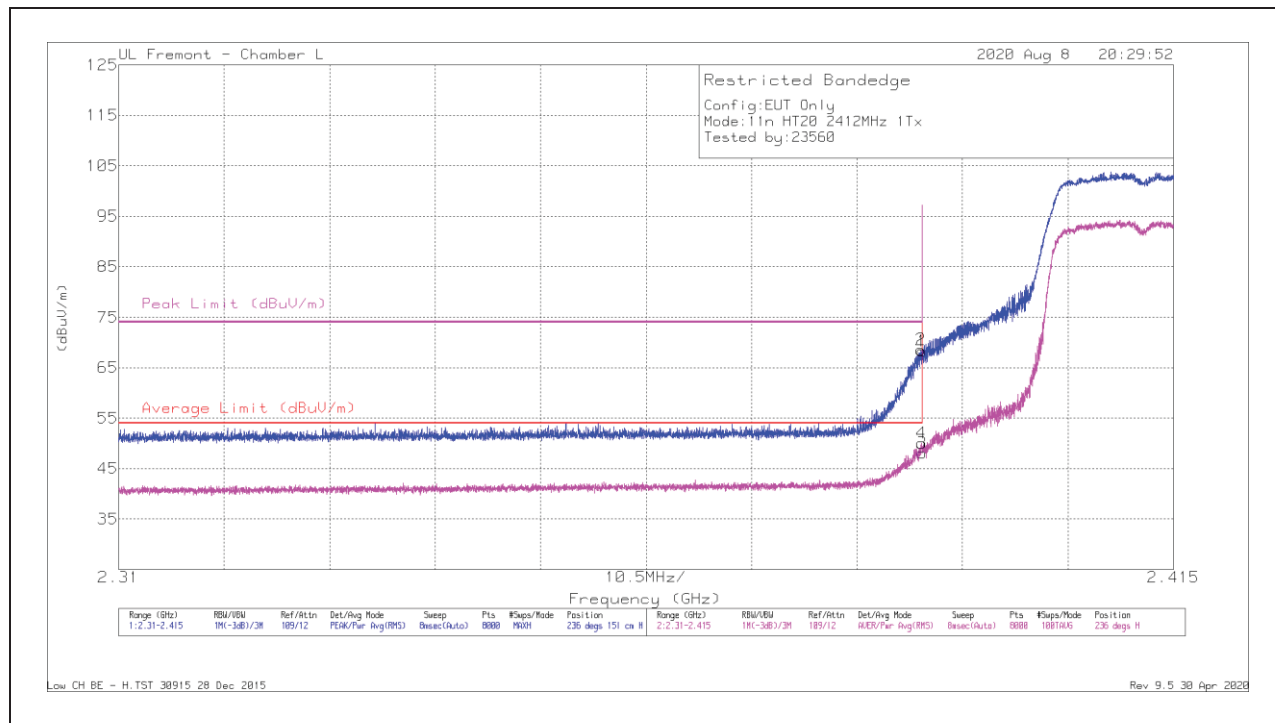

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.48	Pk	31.9	-13.1	0	68.28	-	-	74	-5.72	236	151	H
2	* 2.38984	49.8	Pk	31.9	-13.1	0	68.6	-	-	74	-5.4	236	151	H
3	* 2.39	28.84	RMS	31.9	-13.1	.36	48.00	54	-6.00	-	-	236	151	H
4	* 2.38994	30.85	RMS	31.9	-13.1	.36	50.01	54	-3.99	-	-	236	151	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

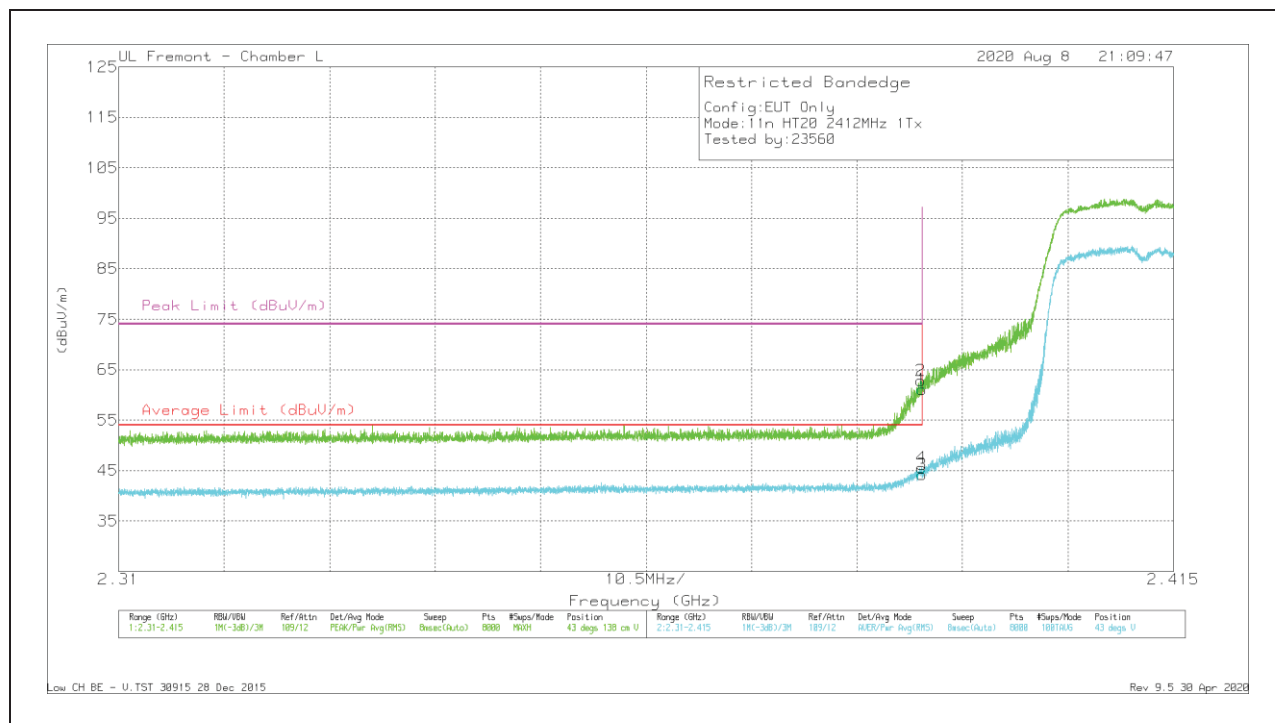


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.24	Pk	31.9	-13.1	0	61.04	-	-	74	-12.96	43	138	V
2	* 2.38986	44.04	Pk	31.9	-13.1	0	62.84	-	-	74	-11.16	43	138	V
3	* 2.39	25.08	RMS	31.9	-13.1	.36	44.24	54	-9.76	-	-	43	138	V
4	* 2.38993	26.45	RMS	31.9	-13.1	.36	45.61	54	-8.39	-	-	43	138	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

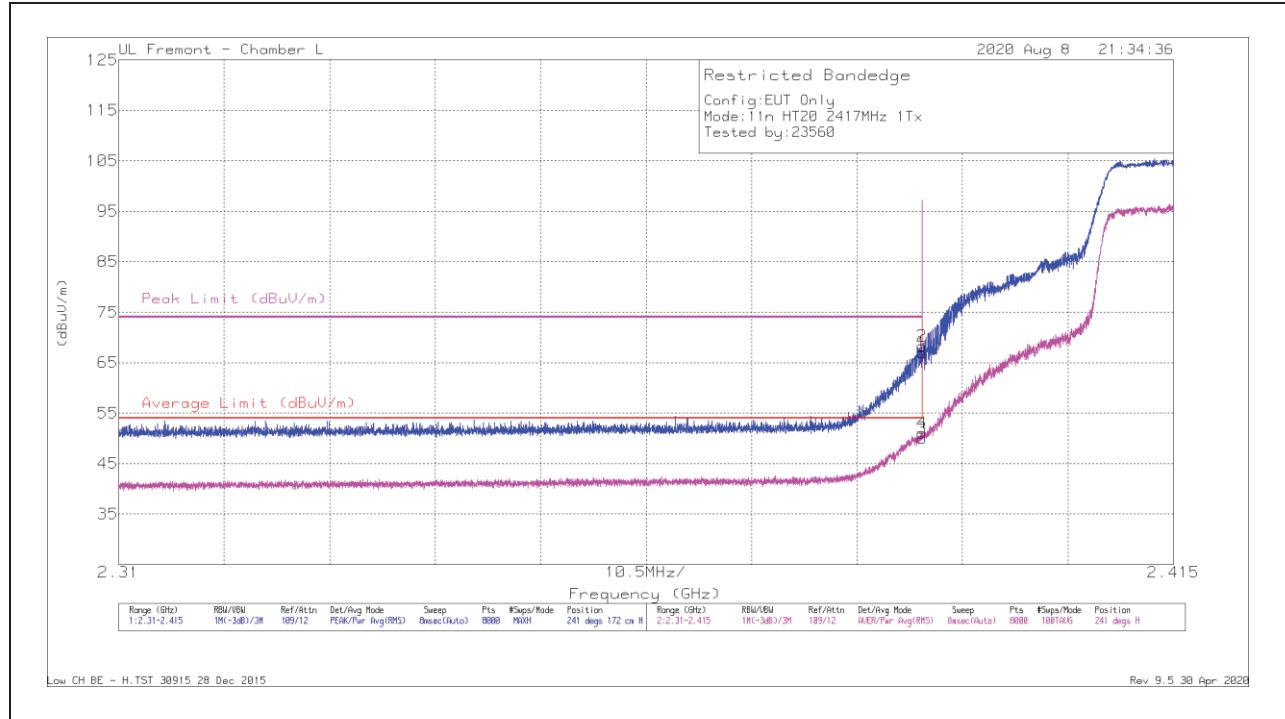


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.16	Pk	31.9	-13.1	0	66.96	-	-	74	-7.04	241	172	H
2	* 2.38998	49.54	Pk	31.9	-13.1	0	68.34	-	-	74	-5.66	241	172	H
3	* 2.39	30.83	RMS	31.9	-13.1	.36	49.99	54	-4.01	-	-	241	172	H
4	* 2.38996	31.89	RMS	31.9	-13.1	.36	51.05	54	-2.95	-	-	241	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

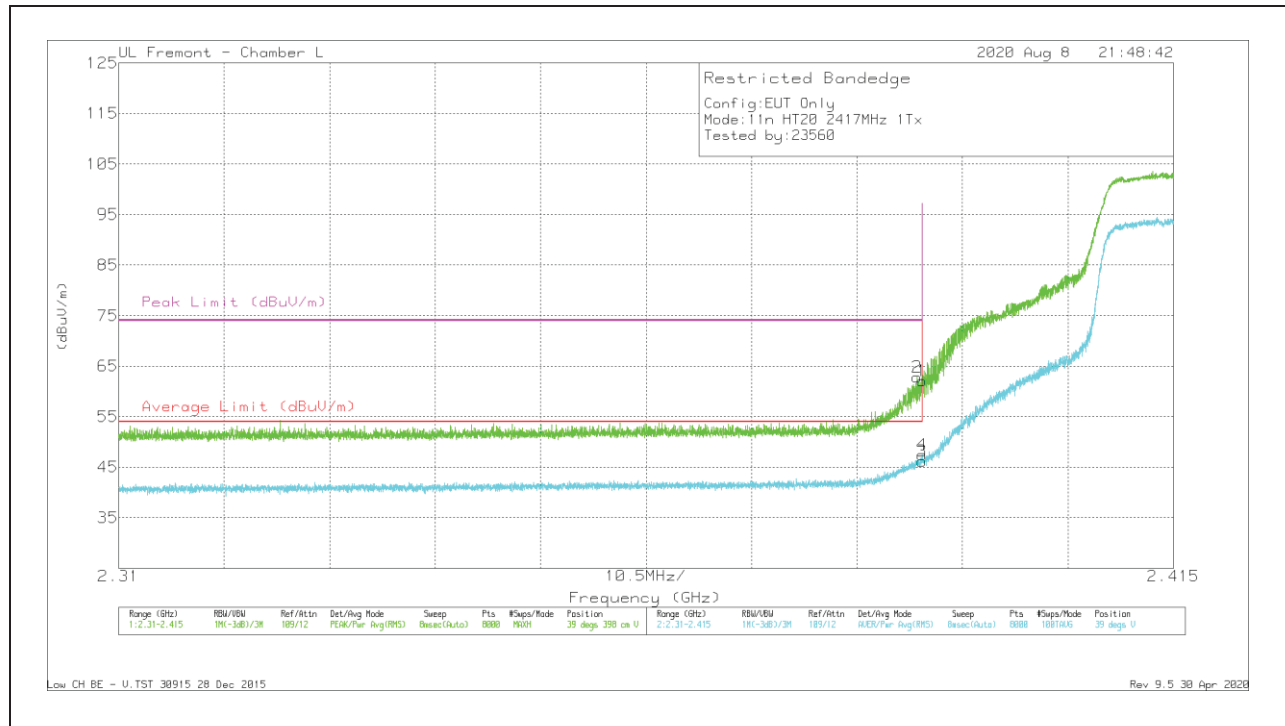

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.34	Pk	31.9	-13.1	0	62.14	-	-	74	-11.86	39	398	V
2	* 2.3895	44.05	Pk	31.9	-13.1	0	62.85	-	-	74	-11.15	39	398	V
3	* 2.39	27.02	RMS	31.9	-13.1	.36	46.18	54	-7.82	-	-	39	398	V
4	* 2.38998	28.21	RMS	31.9	-13.1	.36	47.37	54	-6.63	-	-	39	398	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

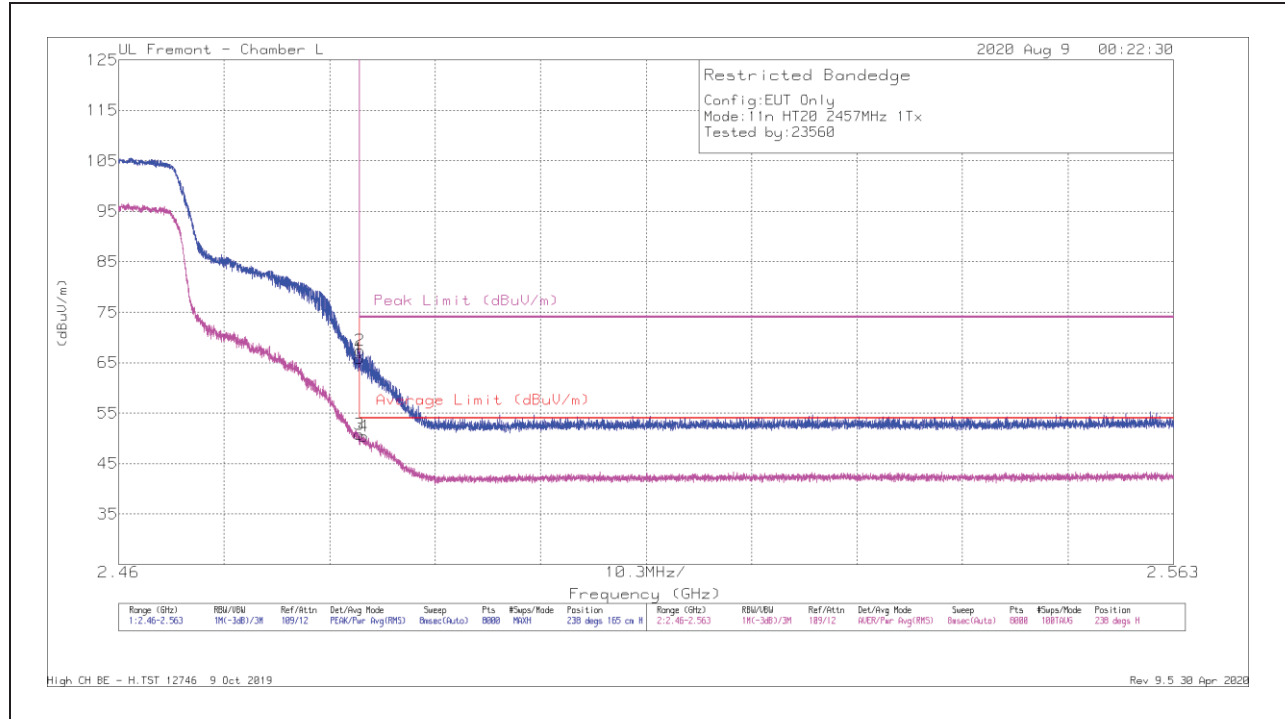


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	46.4	Pk	32.3	-12.9	0	65.8	-	-	74	-8.2	238	165	H
2	* 2.48356	48.08	Pk	32.3	-12.9	0	67.48	-	-	74	-6.52	238	165	H
3	* 2.4835	30.97	RMS	32.3	-12.9	-36	50.73	54	-3.27	-	-	238	165	H
4	* 2.4839	30.68	RMS	32.3	-12.9	-36	50.44	54	-3.56	-	-	238	165	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

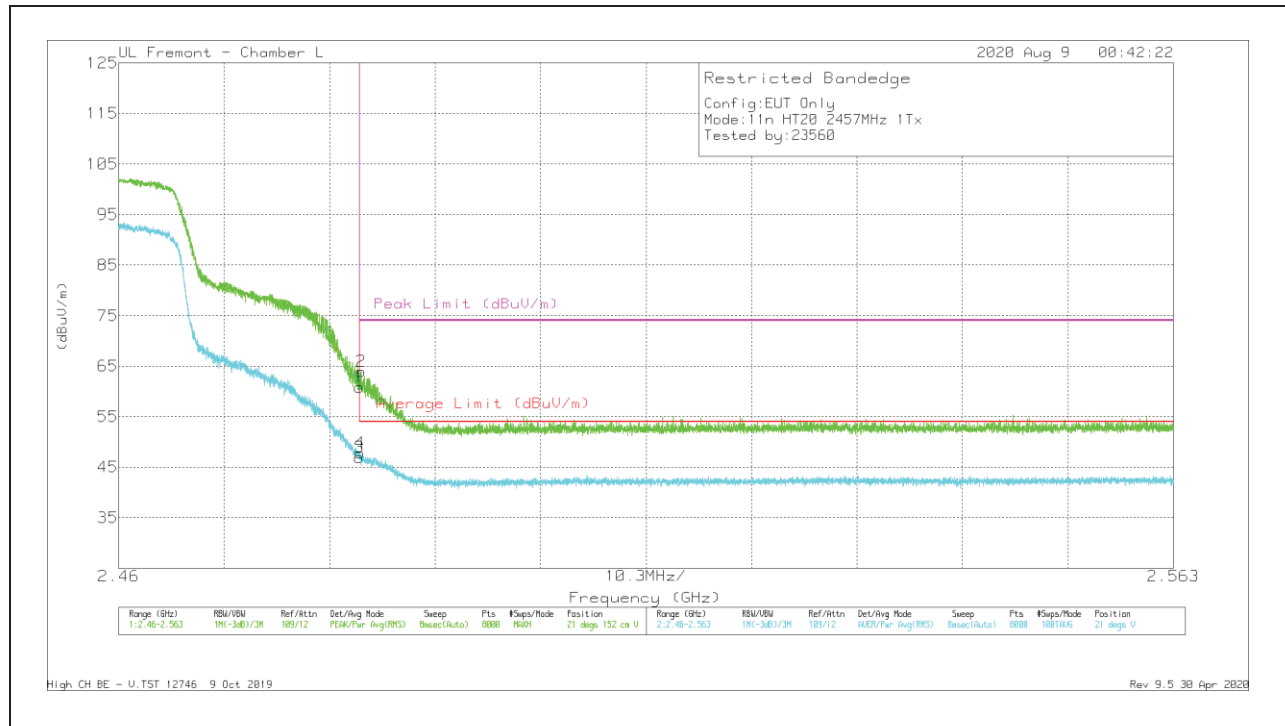

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	41.42	Pk	32.3	-12.9	0	60.82	-	-	74	-13.18	21	152	V
2	* 2.48366	44.55	Pk	32.3	-12.9	0	63.95	-	-	74	-10.05	21	152	V
3	* 2.4835	27.18	RMS	32.3	-12.9	.36	46.94	54	-7.06	-	-	21	152	V
4	* 2.48355	28.02	RMS	32.3	-12.9	.36	47.78	54	-6.22	-	-	21	152	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

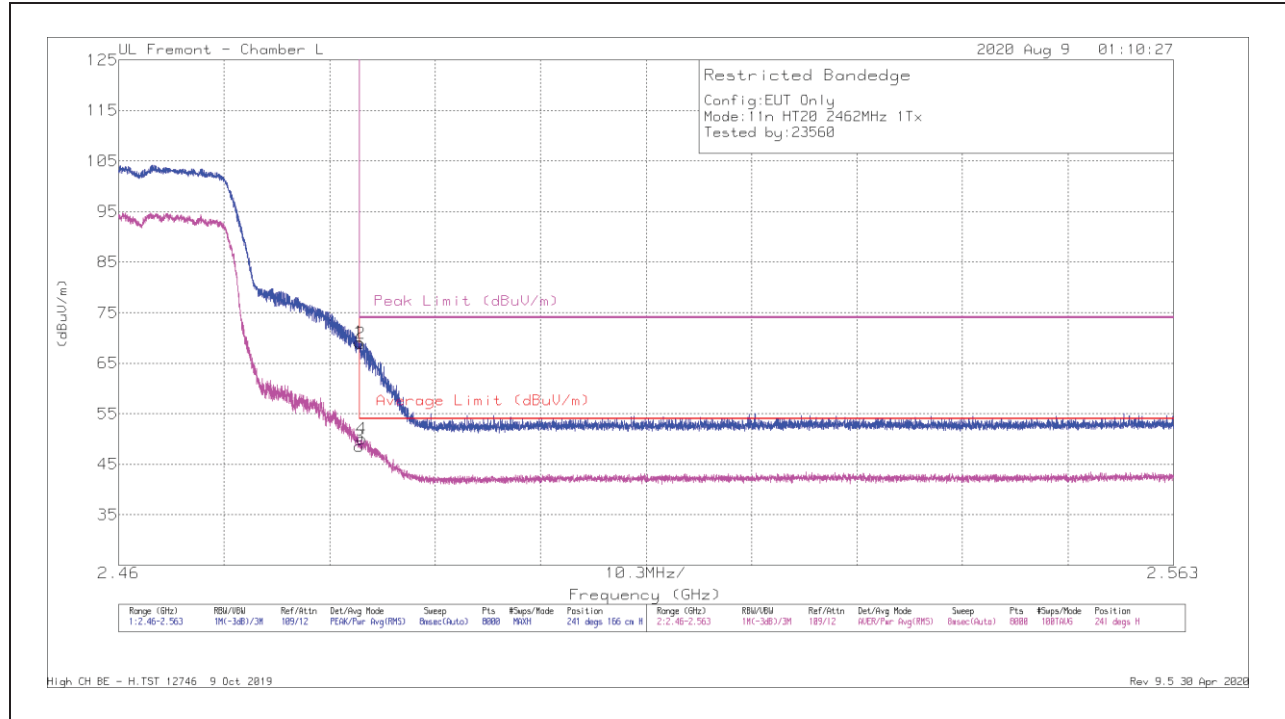


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.76	Pk	32.3	-12.9	0	69.16	-	-	74	-4.84	241	166	H
2	* 2.48364	49.56	Pk	32.3	-12.9	0	68.96	-	-	74	-5.04	241	166	H
3	* 2.4835	28.84	RMS	32.3	-12.9	-36	48.60	54	-5.40	-	-	241	166	H
4	* 2.48372	30.32	RMS	32.3	-12.9	-36	50.08	54	-3.92	-	-	241	166	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

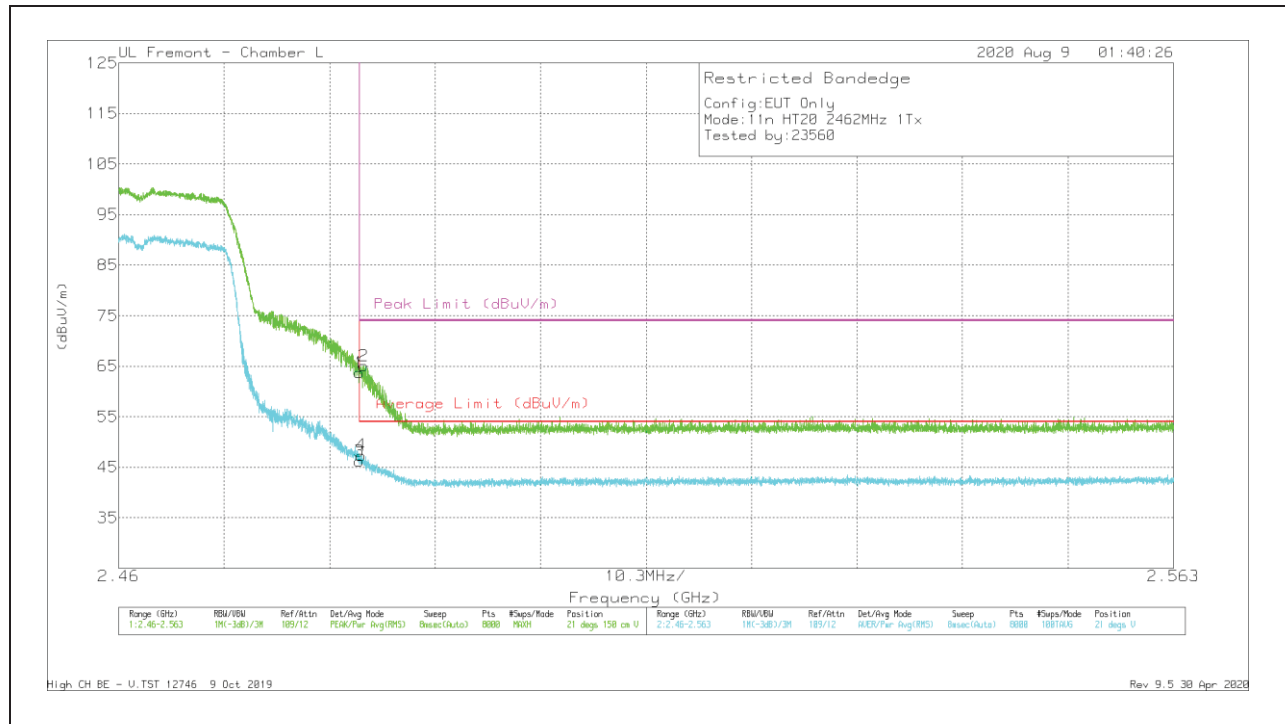


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	44.32	Pk	32.3	-12.9	0	63.72	-	-	74	-10.28	21	150	V
2	* 2.48395	45.68	Pk	32.3	-12.9	0	65.08	-	-	74	-8.92	21	150	V
3	* 2.4835	26.4	RMS	32.3	-12.9	.36	46.16	54	-7.84	-	-	21	150	V
4	* 2.48368	27.6	RMS	32.3	-12.9	.36	47.36	54	-6.64	-	-	21	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

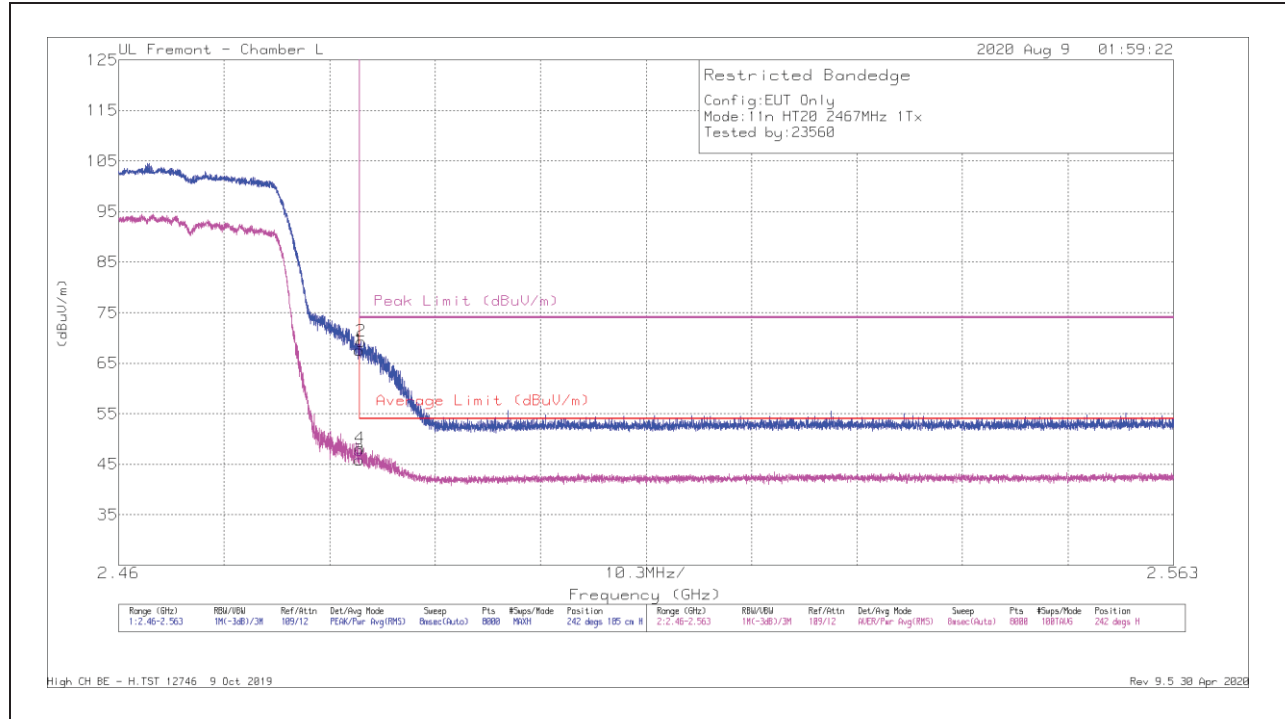


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.1	Pk	32.3	-12.9	0	67.5	-	-	74	-6.5	242	185	H
2	* 2.48369	49.95	Pk	32.3	-12.9	0	69.35	-	-	74	-4.65	242	185	H
3	* 2.4835	26.03	RMS	32.3	-12.9	-36	45.79	54	-8.21	-	-	242	185	H
4	* 2.48355	28.43	RMS	32.3	-12.9	-36	48.19	54	-5.81	-	-	242	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

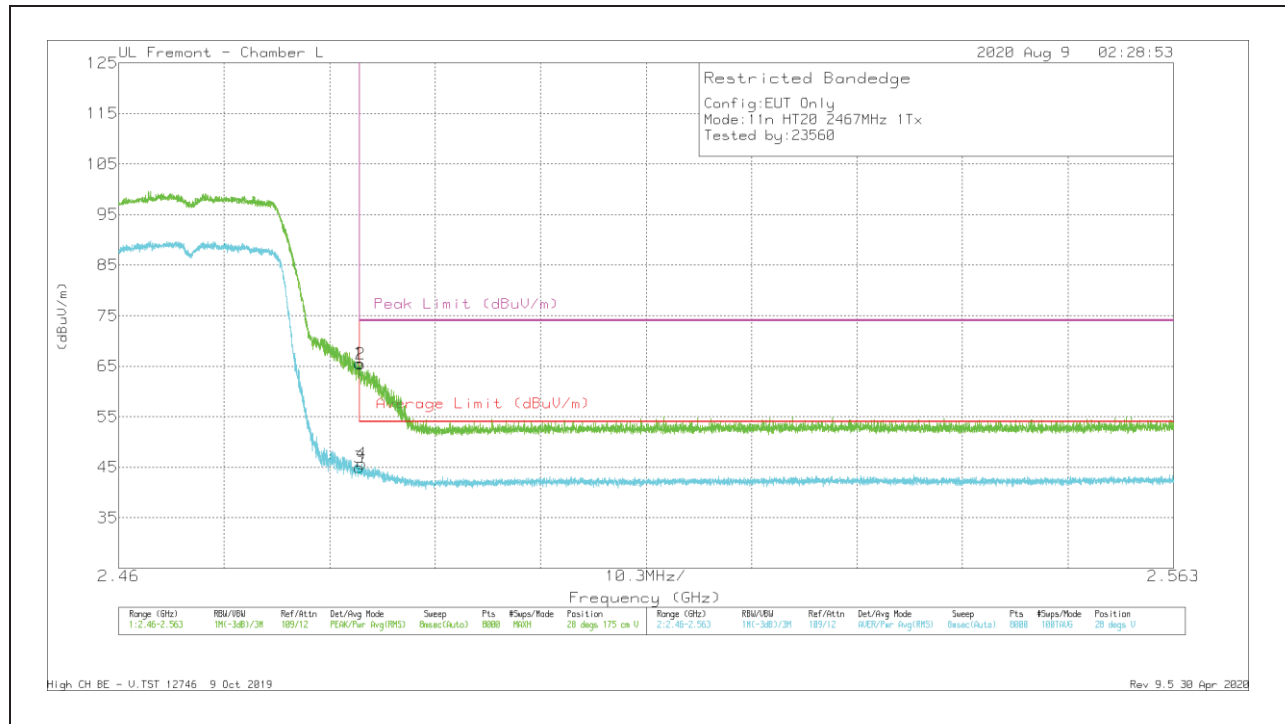


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	46.13	Pk	32.3	-12.9	0	65.53	-	-	74	-8.47	28	175	V
2	* 2.48362	46.09	Pk	32.3	-12.9	0	65.49	-	-	74	-8.51	28	175	V
3	* 2.4835	25.19	RMS	32.3	-12.9	.36	44.95	54	-9.05	-	-	28	175	V
4	* 2.48373	25.97	RMS	32.3	-12.9	.36	45.73	54	-8.27	-	-	28	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

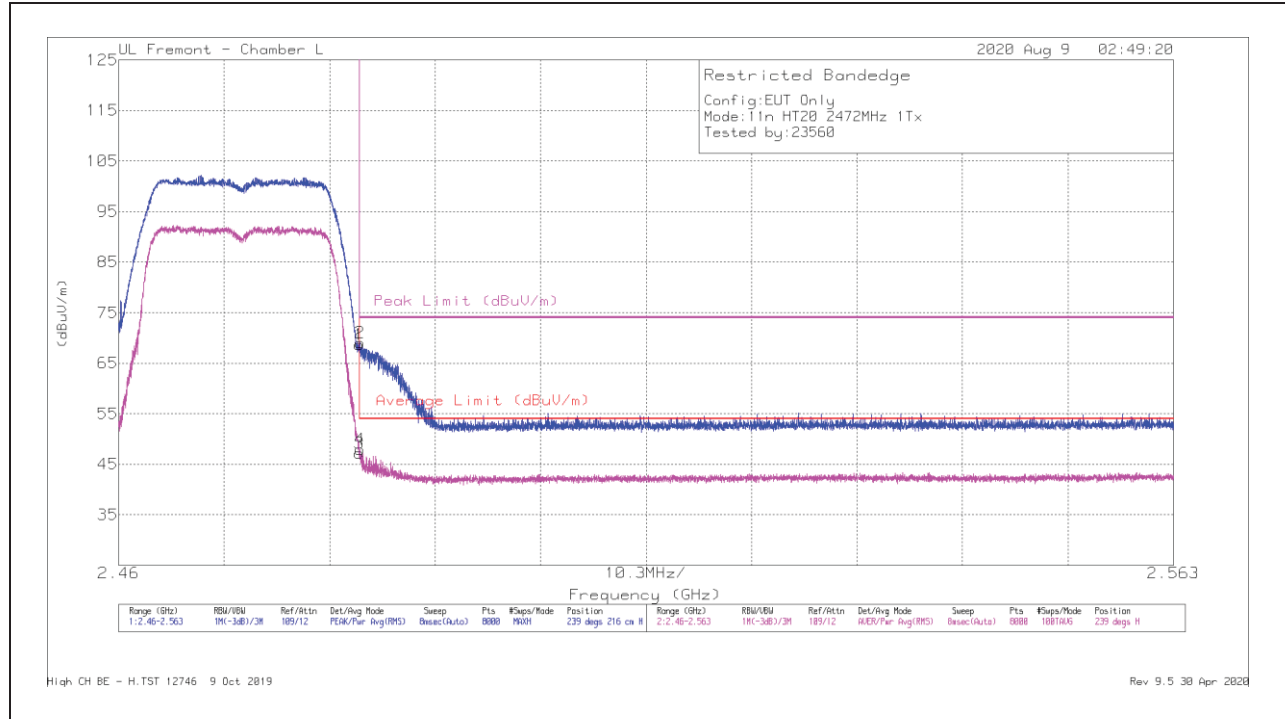


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.23	Pk	32.3	-12.9	0	68.63	-	-	74	-5.37	239	216	H
2	* 2.48354	49.63	Pk	32.3	-12.9	0	69.03	-	-	74	-4.97	239	216	H
3	* 2.4835	27.47	RMS	32.3	-12.9	-36	47.23	54	-6.77	-	-	239	216	H
4	* 2.48358	28.11	RMS	32.3	-12.9	-36	47.87	54	-6.13	-	-	239	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

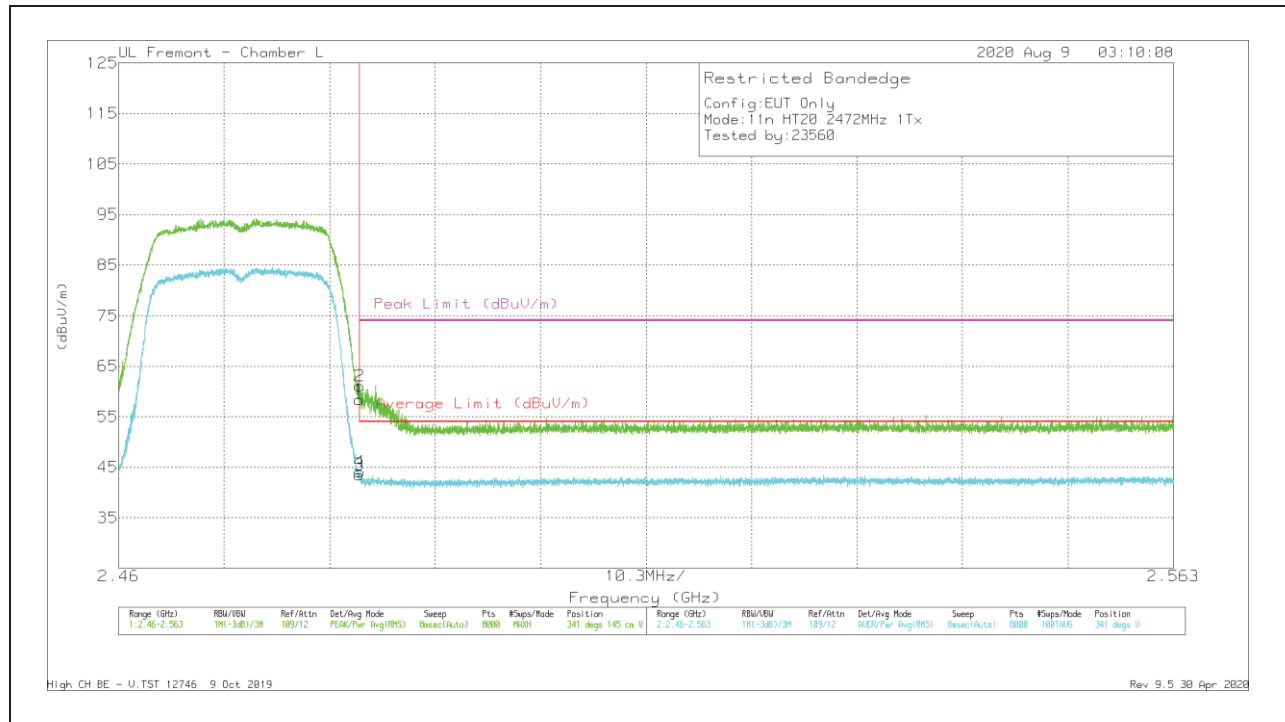


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AP 344 (dBm)	AmplCdbFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.4835	39.01	Pk	32.3	-12.9	0	58.41	-	-	74	-15.59	341	145	V
2	* 2.48353	41.74	Pk	32.3	-12.9	0	61.14	-	-	74	-12.86	341	145	V
3	* 2.4835	23.75	RMS	32.3	-12.9	-36	43.51	54	-10.49	-	-	341	145	V
4	* 2.48353	24.36	RMS	32.3	-12.9	-36	44.12	54	-9.88	-	-	341	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX ANT 4 + ANT 3 CDD MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

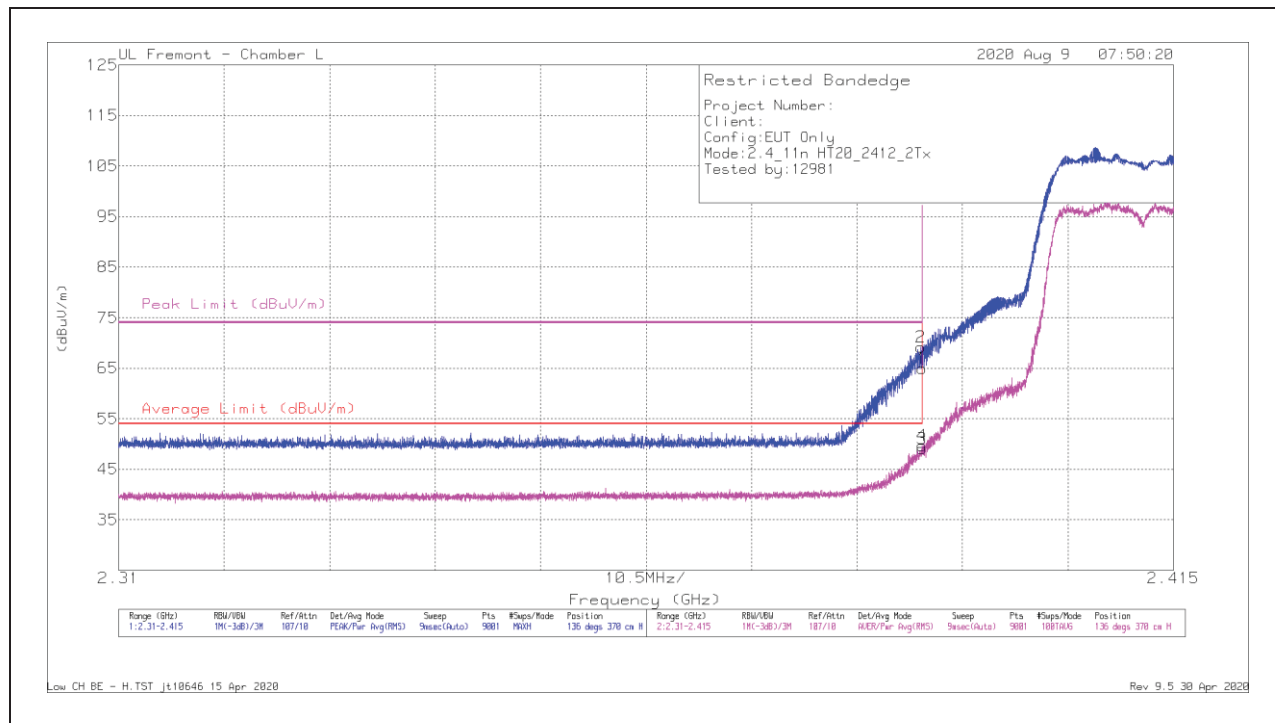

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.15	Pk	31.9	-21.1	0	64.95	-	-	74	-9.05	136	370	H
2	* 2.38988	58.38	Pk	31.9	-21.1	0	69.18	-	-	74	-4.82	136	370	H
3	* 2.38999	37.6	RMS	31.9	-21.1	.61	49.01	54	-4.99	-	-	136	370	H
4	* 2.38995	38.31	RMS	31.9	-21.1	.61	49.72	54	-4.28	-	-	136	370	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

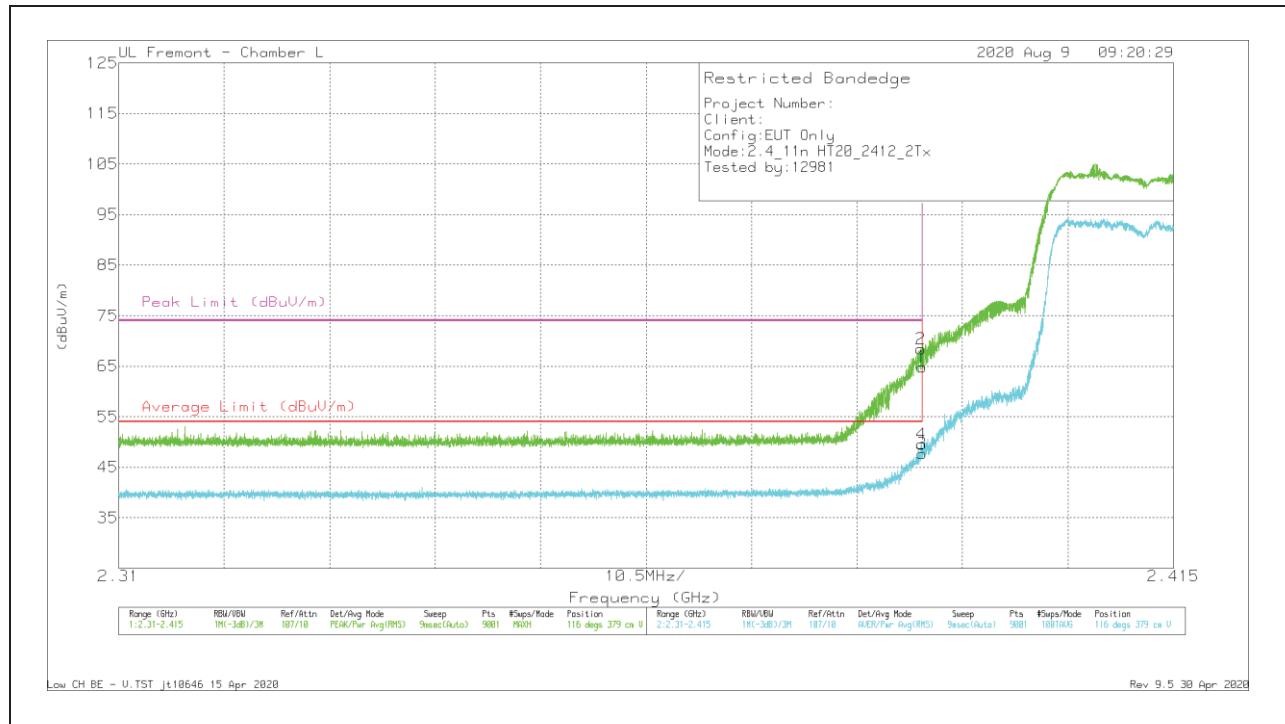


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.08	Pk	31.9	-21.1	0	64.88	-	-	74	-9.12	116	379	V
2	* 2.38986	57.63	Pk	31.9	-21.1	0	68.43	-	-	74	-5.57	116	379	V
3	* 2.38999	36.27	RMS	31.9	-21.1	.61	47.68	54	-6.32	-	-	116	379	V
4	* 2.38994	38.08	RMS	31.9	-21.1	.61	49.49	54	-4.51	-	-	116	379	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

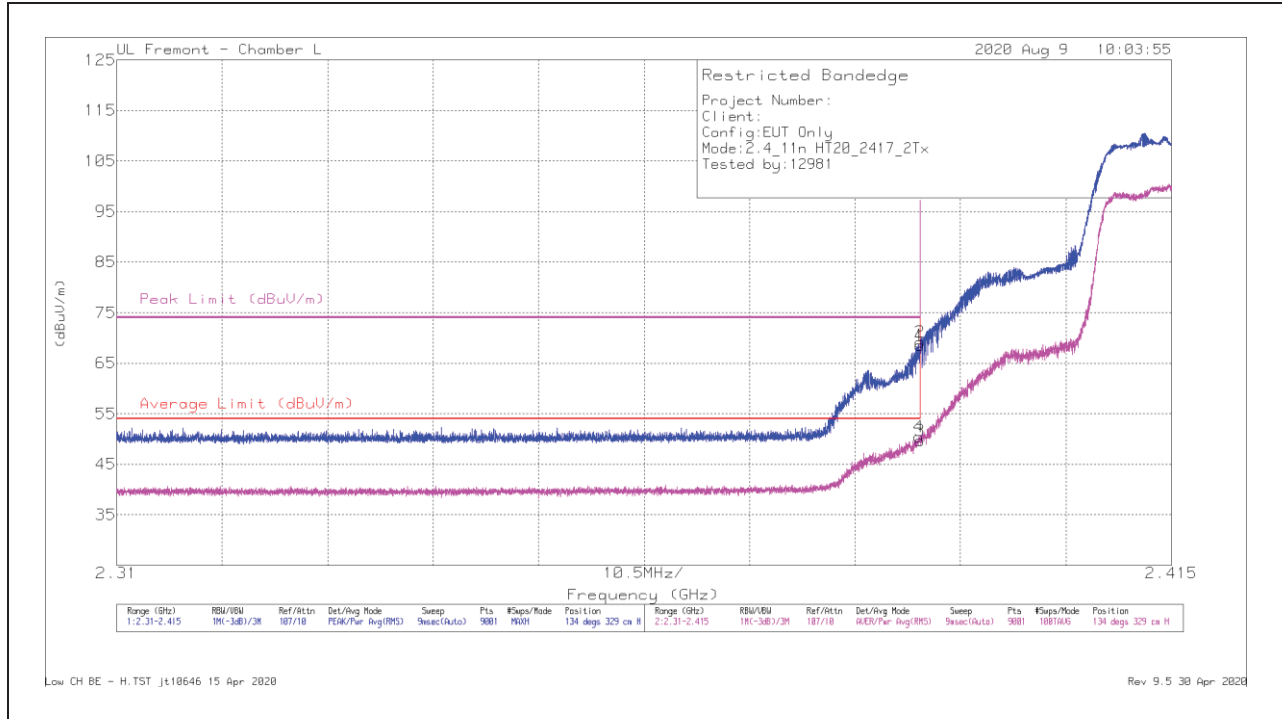

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Chl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	57.75	PK	31.9	-21.1	0	68.55	-	-	74	-5.45	134	329	H
2	* 2.38997	58.37	PK	31.9	-21.1	0	69.17	-	-	74	-4.83	134	329	H
3	* 2.38999	38.28	RMS	31.9	-21.1	.61	49.69	54	-4.31	-	-	134	329	H
4	* 2.38988	38.98	RMS	31.9	-21.1	.61	50.39	54	-3.61	-	-	134	329	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

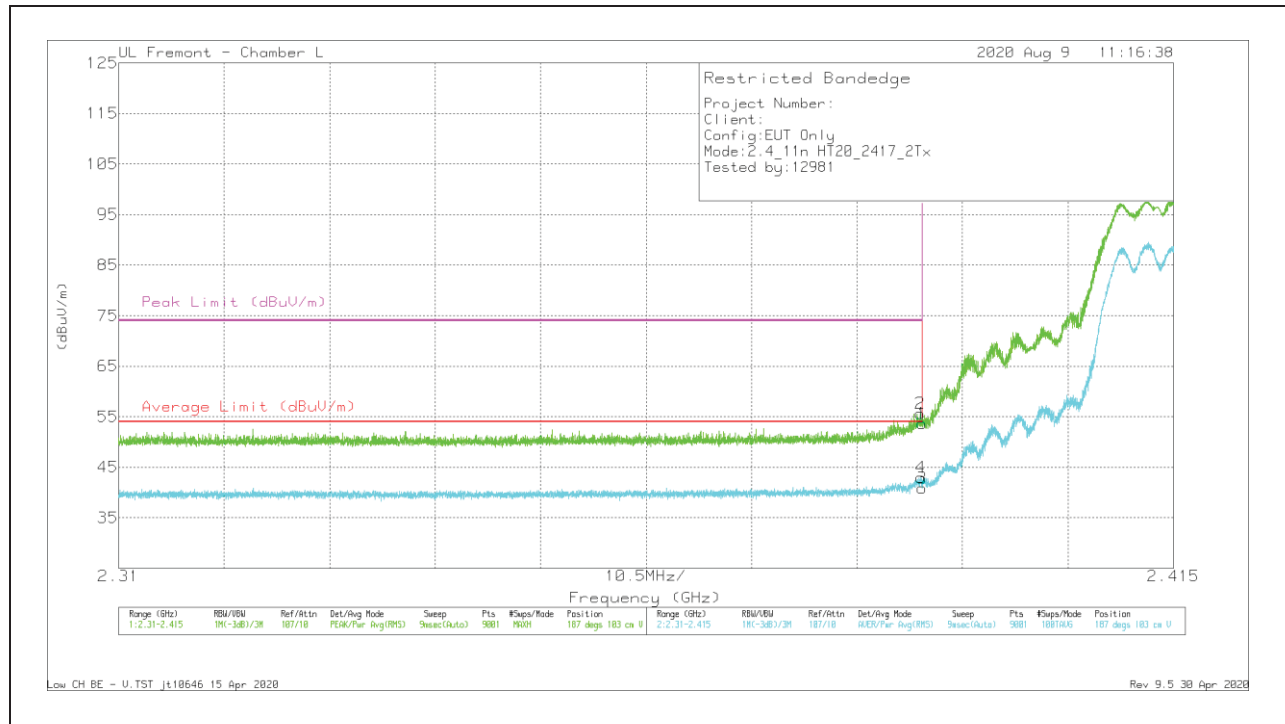


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.84	Pk	31.9	-21.1	0	53.64	-	-	74	-20.36	187	103	V
2	* 2.38978	44.82	Pk	31.9	-21.1	0	55.62	-	-	74	-18.38	187	103	V
3	* 2.38999	29.42	RMS	31.9	-21.1	.61	40.83	54	-13.17	-	-	187	103	V
4	* 2.38988	31.5	RMS	31.9	-21.1	.61	42.91	54	-11.09	-	-	187	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

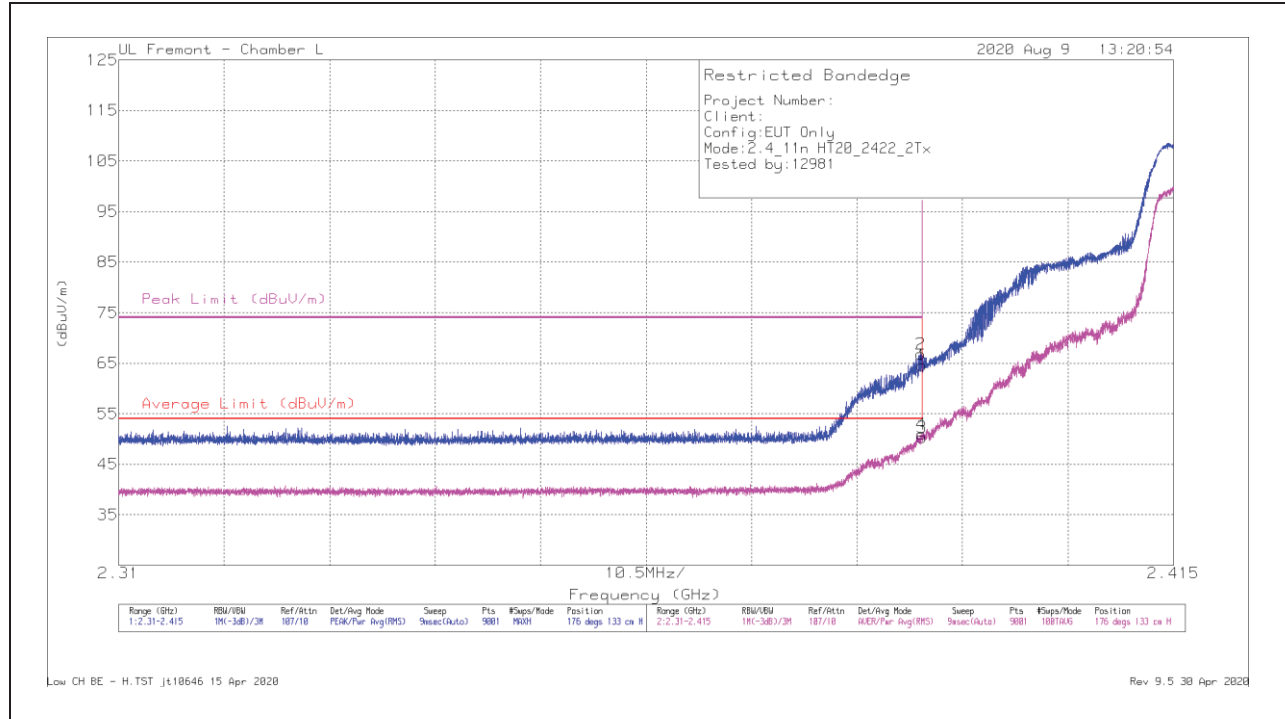


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.72	Pk	31.9	-21.1	0	64.52	-	-	74	-9.48	176	133	H
2	* 2.38983	55.99	Pk	31.9	-21.1	0	66.79	-	-	74	-7.21	176	133	H
3	* 2.38999	38.87	RMS	31.9	-21.1	.61	50.28	54	-3.72	-	-	176	133	H
4	* 2.38992	39.48	RMS	31.9	-21.1	.61	50.89	54	-3.11	-	-	176	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

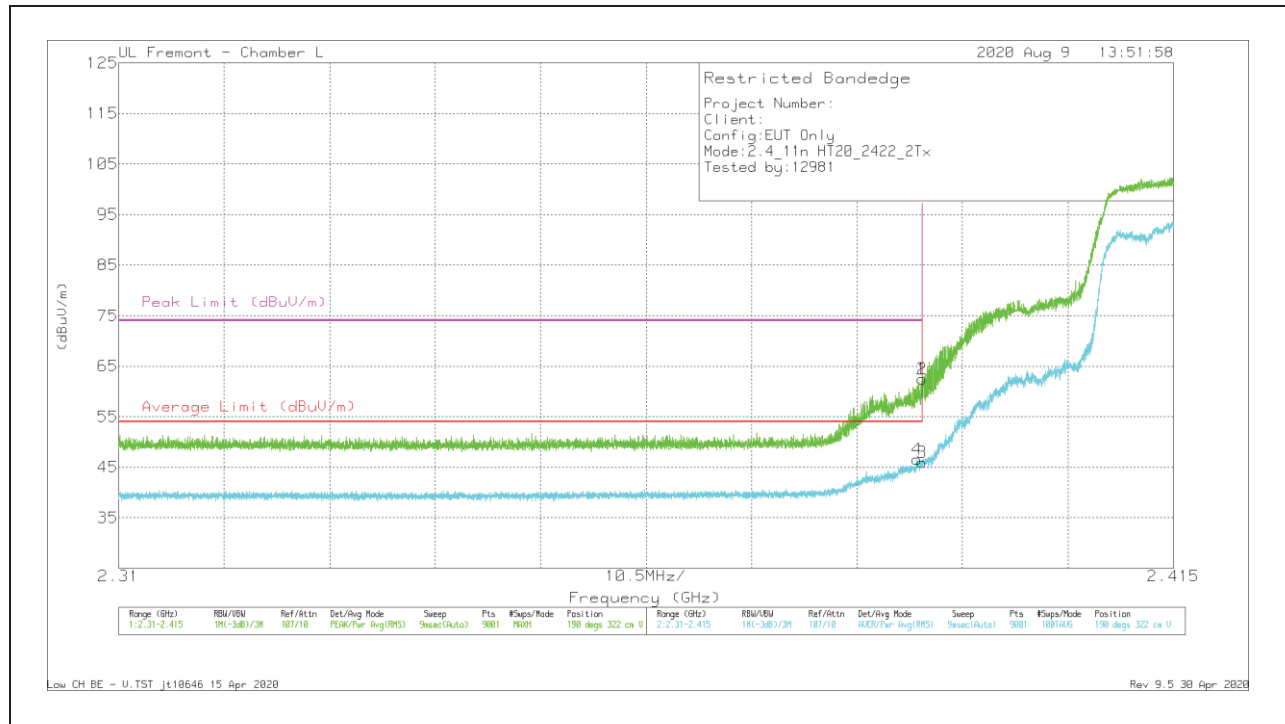


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.7	Pk	31.9	-21.1	0	62.5	-	-	74	-11.5	190	322	V
2	* 2.38998	51.67	Pk	31.9	-21.1	0	62.47	-	-	74	-11.53	190	322	V
3	* 2.38999	34.56	RMS	31.9	-21.1	.61	45.97	54	-8.03	-	-	190	322	V
4	* 2.38945	35.17	RMS	31.9	-21.1	.61	46.58	54	-7.42	-	-	190	322	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

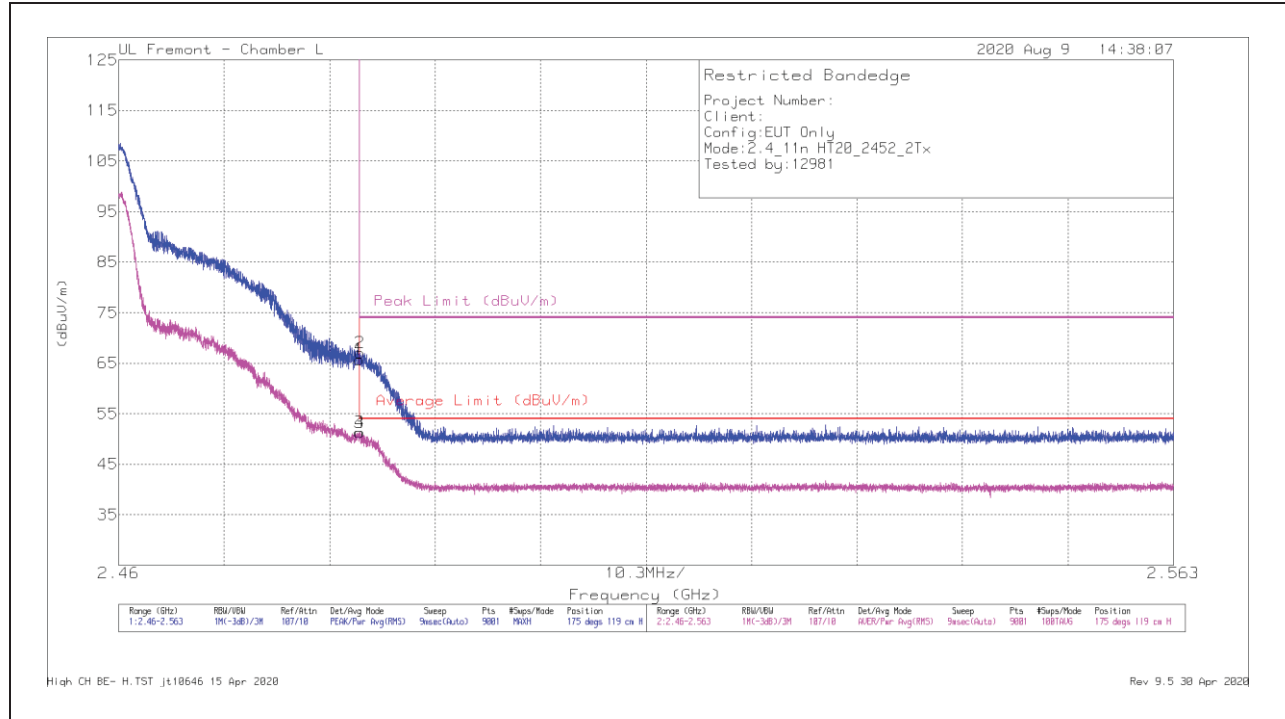

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.31	Pk	32.3	-20.9	0	65.71	-	-	74	-8.29	175	119	H
2	* 2.48357	55.6	Pk	32.3	-20.9	0	67	-	-	74	-7	175	119	H
3	* 2.48351	39.29	RMS	32.3	-20.9	.61	51.3	54	-2.7	-	-	175	119	H
4	* 2.48356	39.29	RMS	32.3	-20.9	.61	51.3	54	-2.7	-	-	175	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

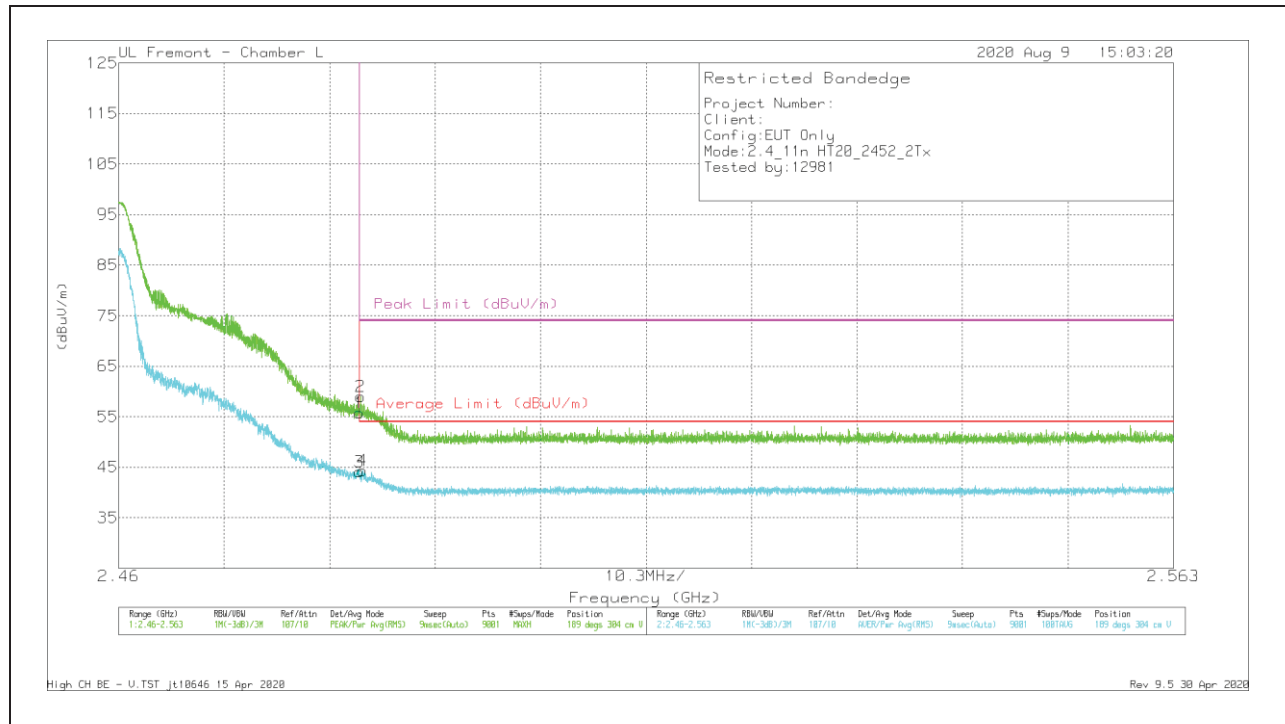


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.37	Pk	32.3	-20.9	0	55.77	-	-	74	-18.23	189	304	V
2	* 2.48363	47.57	Pk	32.3	-20.9	0	58.97	-	-	74	-15.03	189	304	V
3	* 2.48351	32.07	RMS	32.3	-20.9	.61	44.08	54	-9.92	-	-	189	304	V
4	* 2.48378	32.31	RMS	32.3	-20.9	.61	44.32	54	-9.68	-	-	189	304	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

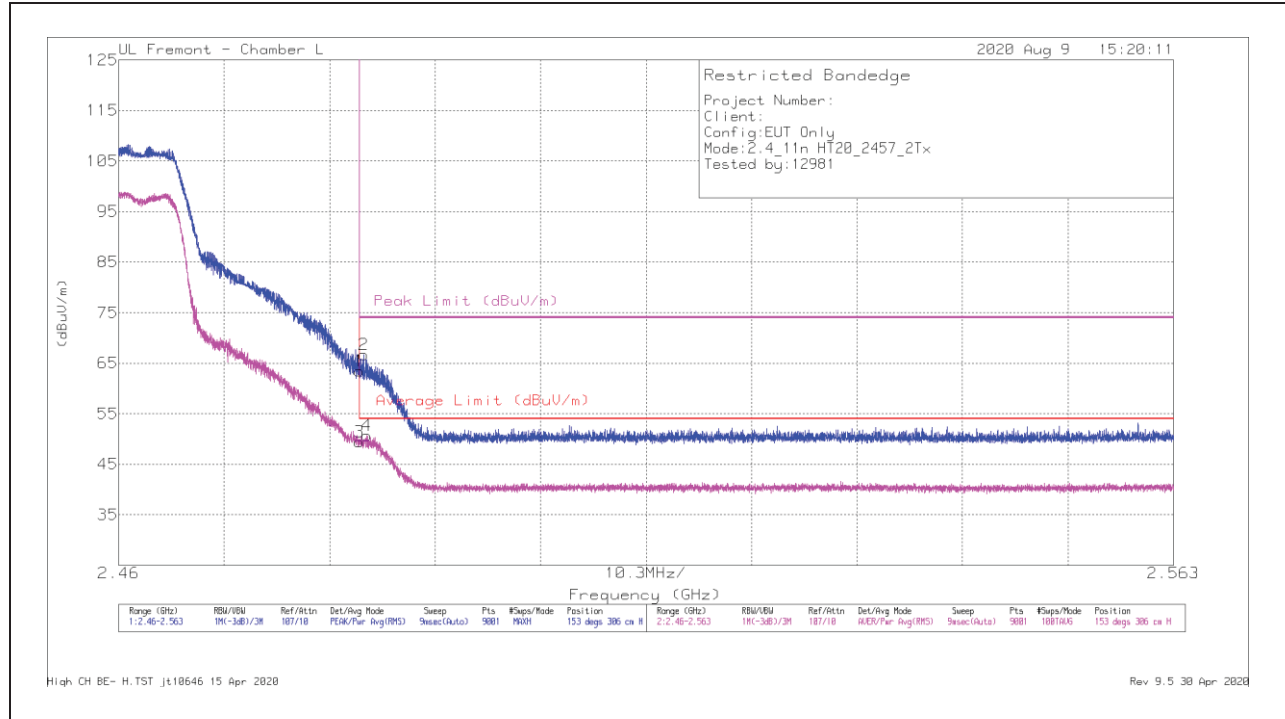

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.07	Pk	32.3	-20.9	0	63.47	-	-	74	-10.53	153	306	H
2	* 2.48391	55.31	Pk	32.3	-20.9	0	66.71	-	-	74	-7.29	153	306	H
3	* 2.48351	37.45	RMS	32.3	-20.9	.61	49.46	54	-4.54	-	-	153	306	H
4	* 2.48424	38.7	RMS	32.3	-20.9	.61	50.71	54	-3.29	-	-	153	306	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

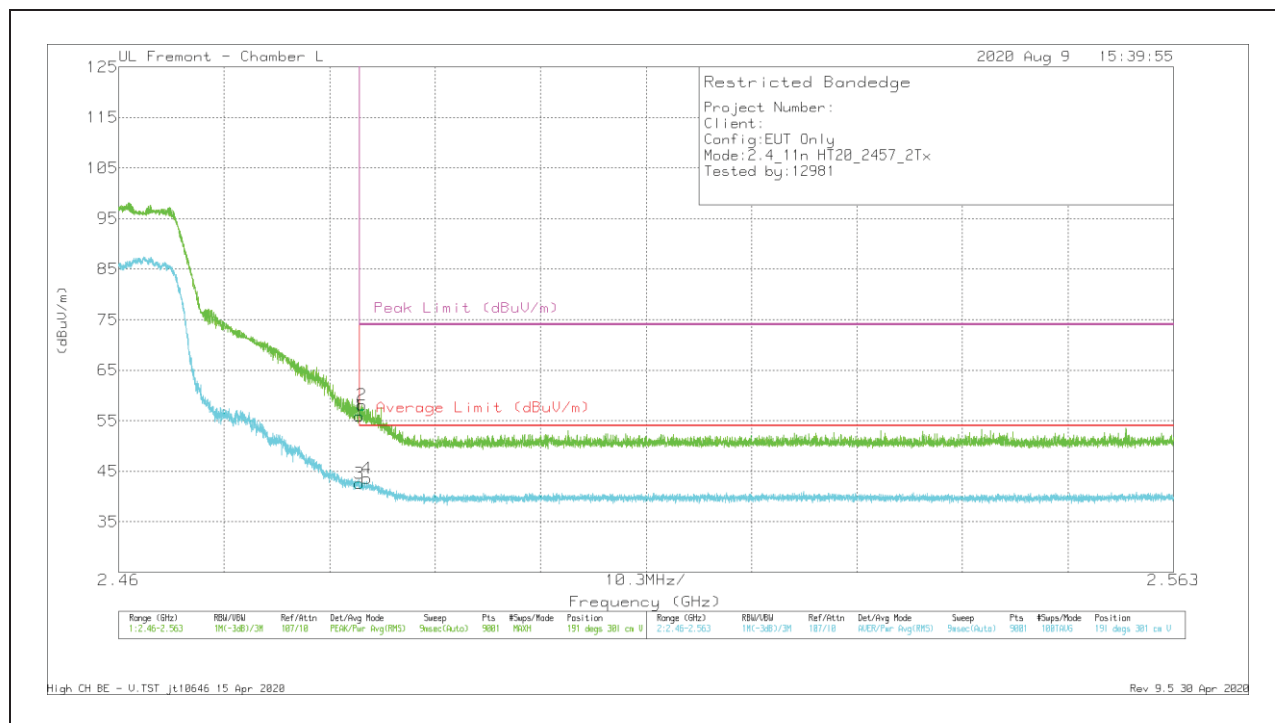


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.53	Pk	32.3	-20.9	0	55.93	-	-	74	-18.07	191	301	V
2	* 2.48377	46.68	Pk	32.3	-20.9	0	58.08	-	-	74	-15.92	191	301	V
3	* 2.48351	30.53	RMS	32.3	-20.9	.61	42.54	54	-11.46	-	-	191	301	V
4	* 2.48423	31.57	RMS	32.3	-20.9	.61	43.58	54	-10.42	-	-	191	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

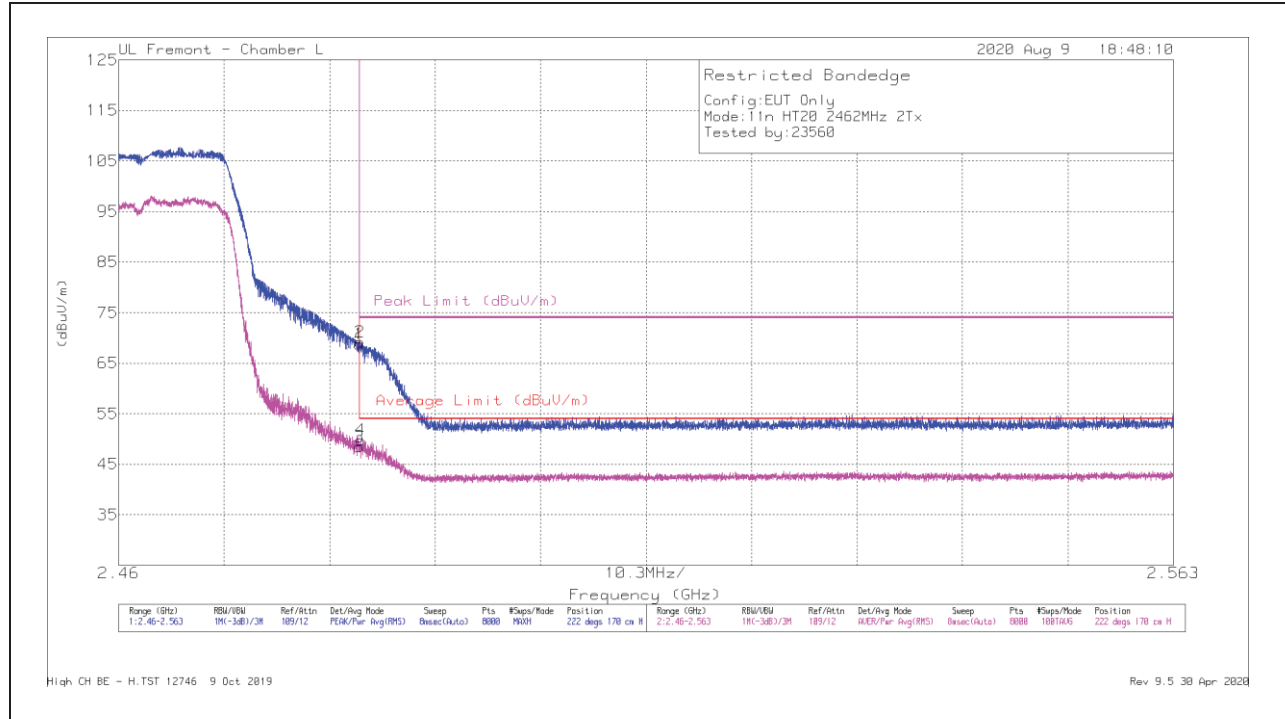

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.41	Pk	32.3	-12.9	0	68.81	-	-	74	-5.19	222	170	H
2	* 2.48356	49.79	Pk	32.3	-12.9	0	69.19	-	-	74	-4.81	222	170	H
3	* 2.4835	28.44	RMS	32.3	-12.9	.61	48.45	54	-5.55	-	-	222	170	H
4	* 2.4836	29.79	RMS	32.3	-12.9	.61	49.8	54	-4.2	-	-	222	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

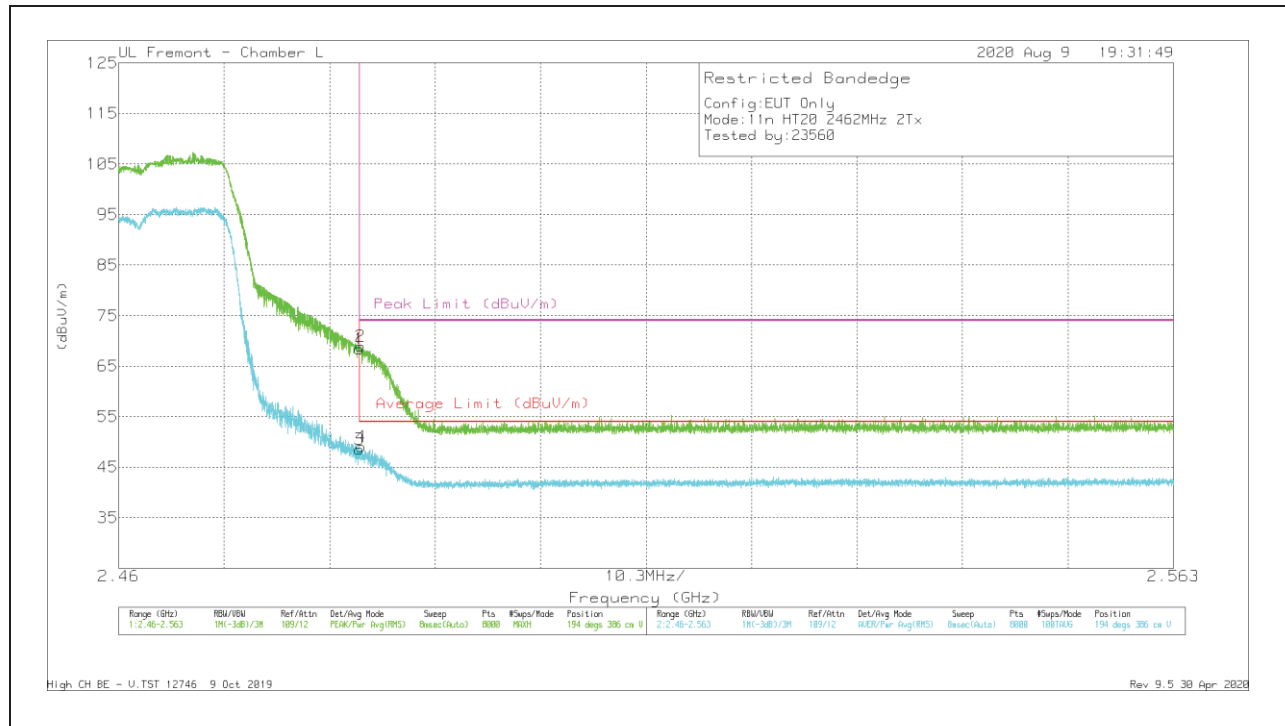


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.05	Pk	32.3	-12.9	0	68.45	-	-	74	-5.55	194	386	V
2	* 2.48362	49.51	Pk	32.3	-12.9	0	68.91	-	-	74	-5.09	194	386	V
3	* 2.4835	28.55	RMS	32.3	-12.9	.61	48.56	54	-5.44	-	-	194	386	V
4	* 2.48368	29.06	RMS	32.3	-12.9	.61	49.07	54	-4.93	-	-	194	386	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

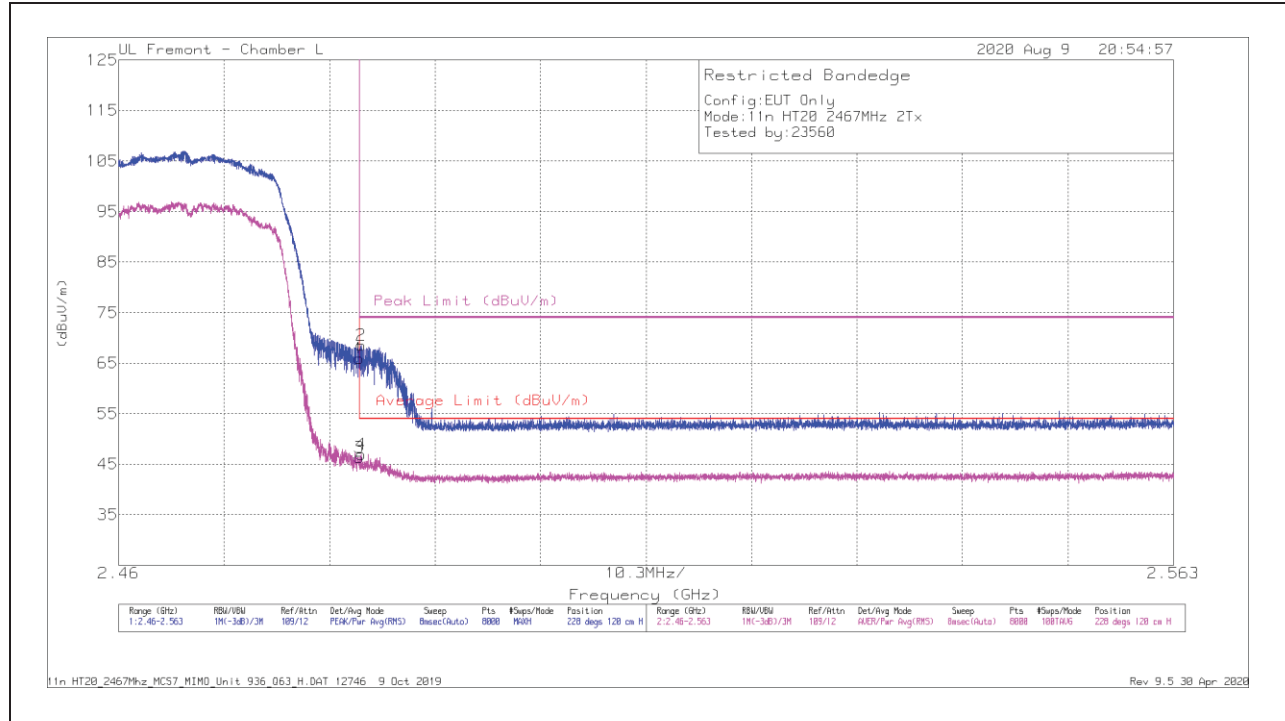

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	46.48	Pk	32.3	-12.9	0	65.88	-	-	74	-8.12	228	120	H
2	* 2.48368	49.09	Pk	32.3	-12.9	0	68.49	-	-	74	-5.51	228	120	H
3	* 2.4835	26.27	RMS	32.3	-12.9	.61	46.28	54	-7.72	-	-	228	120	H
4	* 2.48369	26.94	RMS	32.3	-12.9	.61	46.95	54	-7.05	-	-	228	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

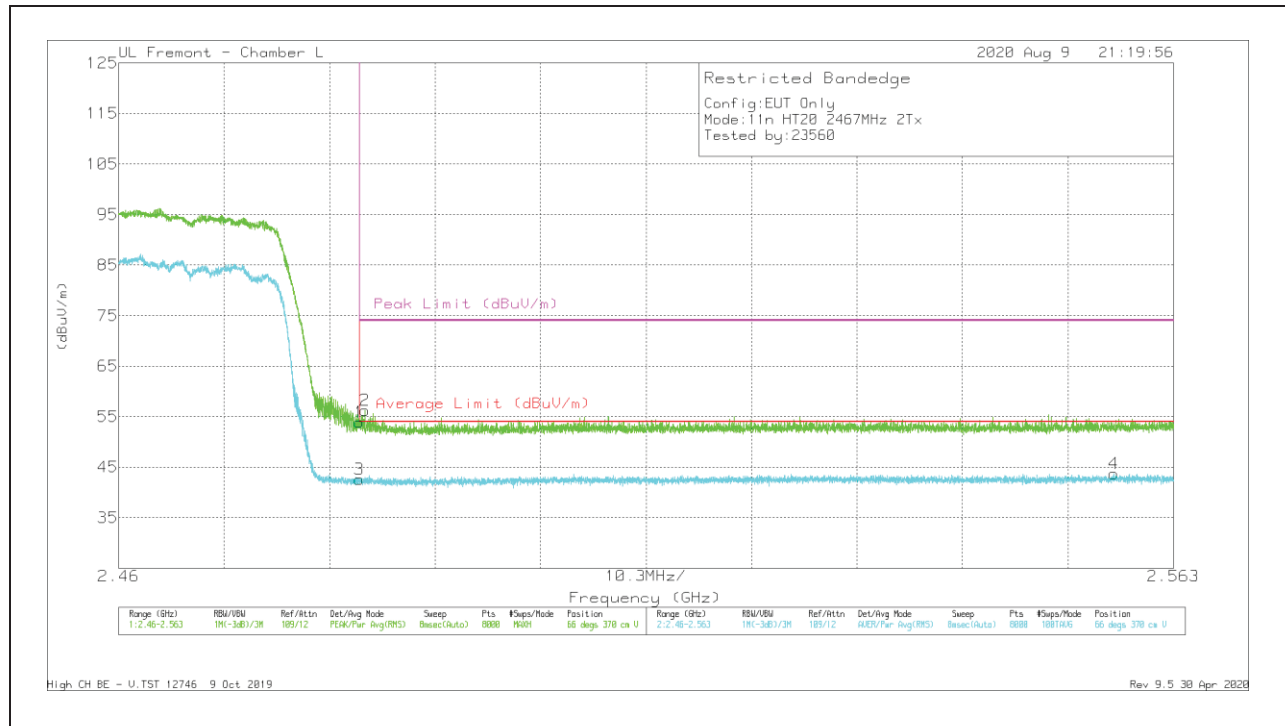

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	34.54	Pk	32.3	-12.9	0	53.94	-	-	74	-20.06	66	370	V
2	* 2.48404	36.89	Pk	32.3	-12.9	0	56.29	-	-	74	-17.71	66	370	V
3	* 2.4835	22.57	RMS	32.3	-12.9	.61	42.58	54	-11.42	-	-	66	370	V
4	2.55717	23.41	RMS	32.3	-12.6	.61	43.72	54	-10.28	-	-	66	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

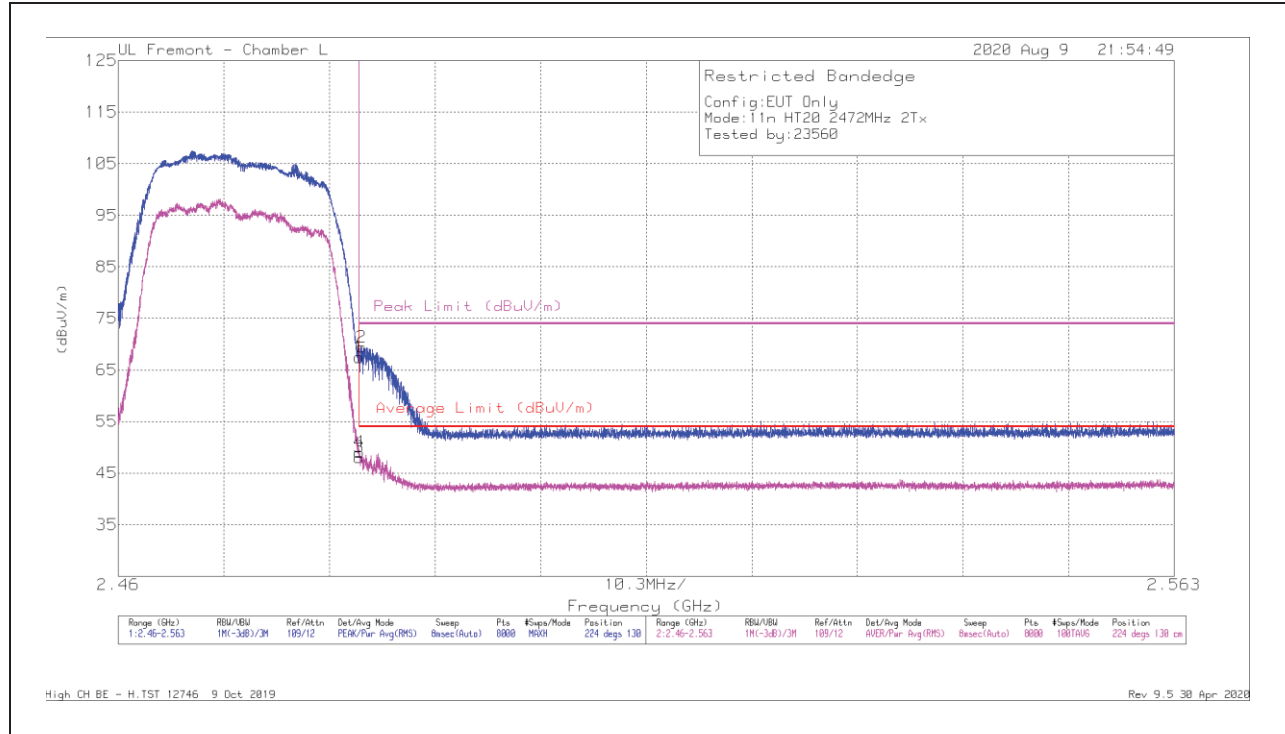

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.06	Pk	32.3	-12.9	0	67.46	-	-	74	-6.54	224	130	H
2	* 2.48373	50.03	Pk	32.3	-12.9	0	69.43	-	-	74	-4.57	224	130	H
3	* 2.4835	28.05	RMS	32.3	-12.9	.61	48.06	54	-5.94	-	-	224	130	H
4	* 2.48351	29.02	RMS	32.3	-12.9	.61	49.03	54	-4.97	-	-	224	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT


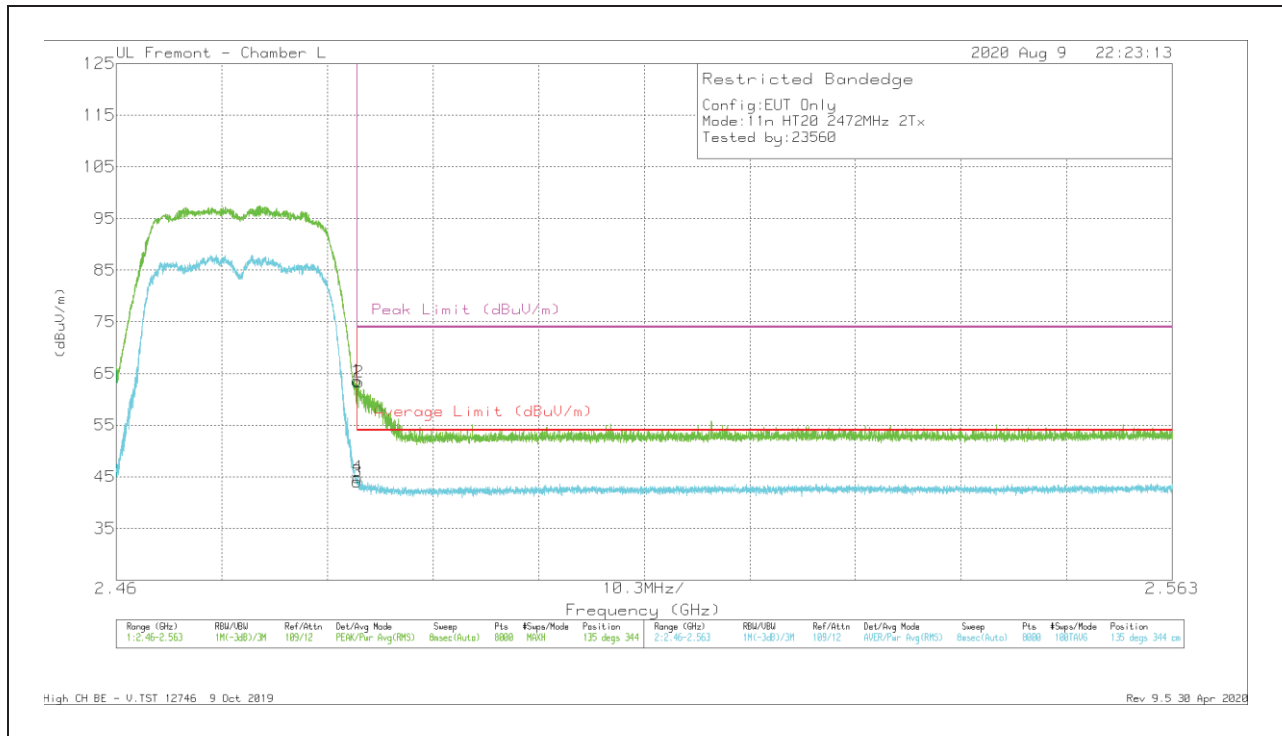


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	44.17	Pk	32.3	-12.9	0	63.57	-	-	74	-10.43	135	344	V
2	* 2.48364	43.93	Pk	32.3	-12.9	0	63.33	-	-	74	-10.67	135	344	V
3	* 2.4835	24.06	RMS	32.3	-12.9	.61	44.07	54	-9.93	-	-	135	344	V
4	* 2.48355	24.91	RMS	32.3	-12.9	.61	44.92	54	-9.08	-	-	135	344	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

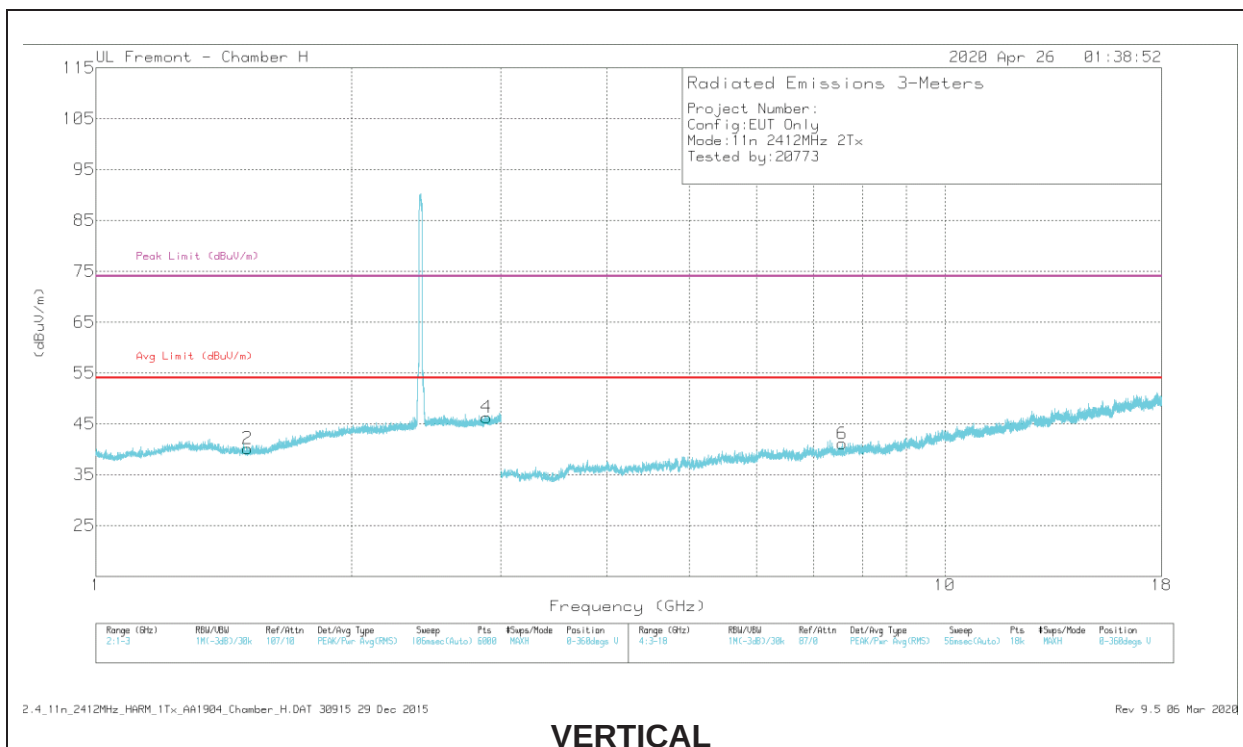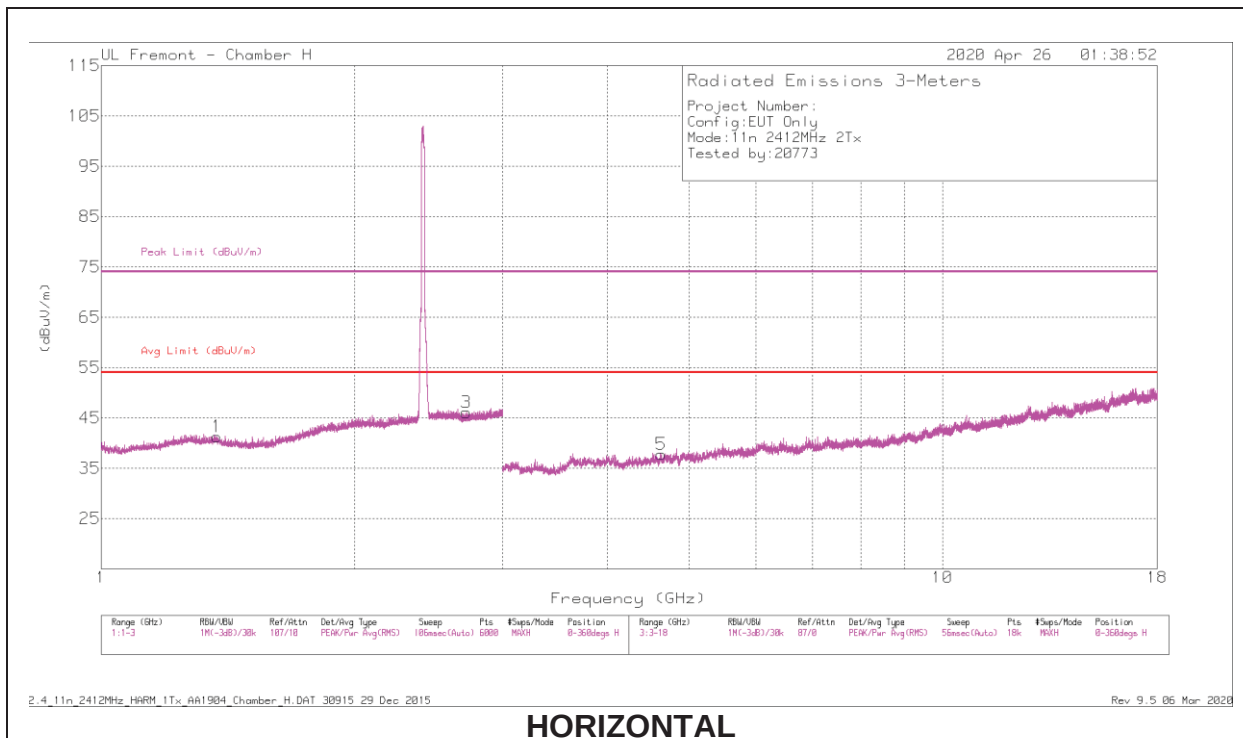

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.37234	45.29	PK2	28.8	-25.4	48.69	-	-	74	-25.31	61	110	H
	* 1.37371	33.43	MAv1	28.8	-25.4	36.83	54	-17.17	-	-	61	110	H
3	* 2.71725	43.98	PK2	32.1	-23.5	52.58	-	-	74	-21.42	312	167	H
	* 2.71387	32.6	MAv1	32.1	-23.5	41.2	54	-12.8	-	-	312	167	H
2	* 1.51014	45.08	PK2	27.8	-25.1	47.78	-	-	74	-26.22	213	200	V
	* 1.5103	33.22	MAv1	27.8	-25.1	35.92	54	-18.08	-	-	213	200	V
4	* 2.8867	44.23	PK2	32.5	-23.4	53.33	-	-	74	-20.67	255	132	V
	* 2.88633	32.63	MAv1	32.5	-23.4	41.73	54	-12.27	-	-	255	132	V
5	* 4.6311	41.66	PK2	34.2	-31.1	44.76	-	-	74	-29.24	102	219	H
	* 4.62987	30.75	MAv1	34.2	-31.1	33.85	54	-20.15	-	-	102	219	H
6	* 7.57253	40.04	PK2	36.1	-28.2	47.94	-	-	74	-26.06	133	373	V
	* 7.57315	28.18	MAv1	36.1	-28.2	36.08	54	-17.92	-	-	133	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average