

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.99168	41.95	PK2	33.5	-30.8	44.65	-	-	74	-29.35	119	225	H
1	* 3.98982	30.21	MAv1	33.5	-30.8	32.91	54	-21.09	-	-	119	225	H
	* 15.53932	36.75	PK2	40.9	-22.7	54.95	-	-	74	-19.05	327	271	H
	* 15.53773	25.37	MAv1	40.9	-22.7	43.57	54	-10.43	-	-	327	271	H
5	* 4.96117	41.39	PK2	34.2	-30.7	44.89	-	-	74	-29.11	330	392	H
5	* 4.96035	29.64	MAv1	34.2	-30.7	33.14	54	-20.86	-	-	330	392	H
2	* 3.63791	41.98	PK2	33	-30.3	44.68	-	-	74	-29.32	243	187	V
2	* 3.63628	30.28	MAv1	33	-30.3	32.98	54	-21.02	-	-	243	187	V
3	* 7.25771	39.27	PK2	36	-27.7	47.57	-	-	74	-26.43	230	362	V
3	* 7.25492	27.67	MAv1	36	-27.8	35.87	54	-18.13	-	-	230	362	V
4	* 10.80918	37.13	PK2	37.6	-22.8	51.93	-	-	74	-22.07	133	214	V
4	* 10.81006	25.01	MAv1	37.6	-22.8	39.81	54	-14.19	-	-	133	214	V
6	* 4.96096	40.87	PK2	34.2	-30.7	44.37	-	-	74	-29.63	149	400	V
6	* 4.96035	29.5	MAv1	34.2	-30.7	33	54	-21	-	-	149	400	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

### 10.2.3. HIGH POWER BLE (2Mbps)

#### ANT 4

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

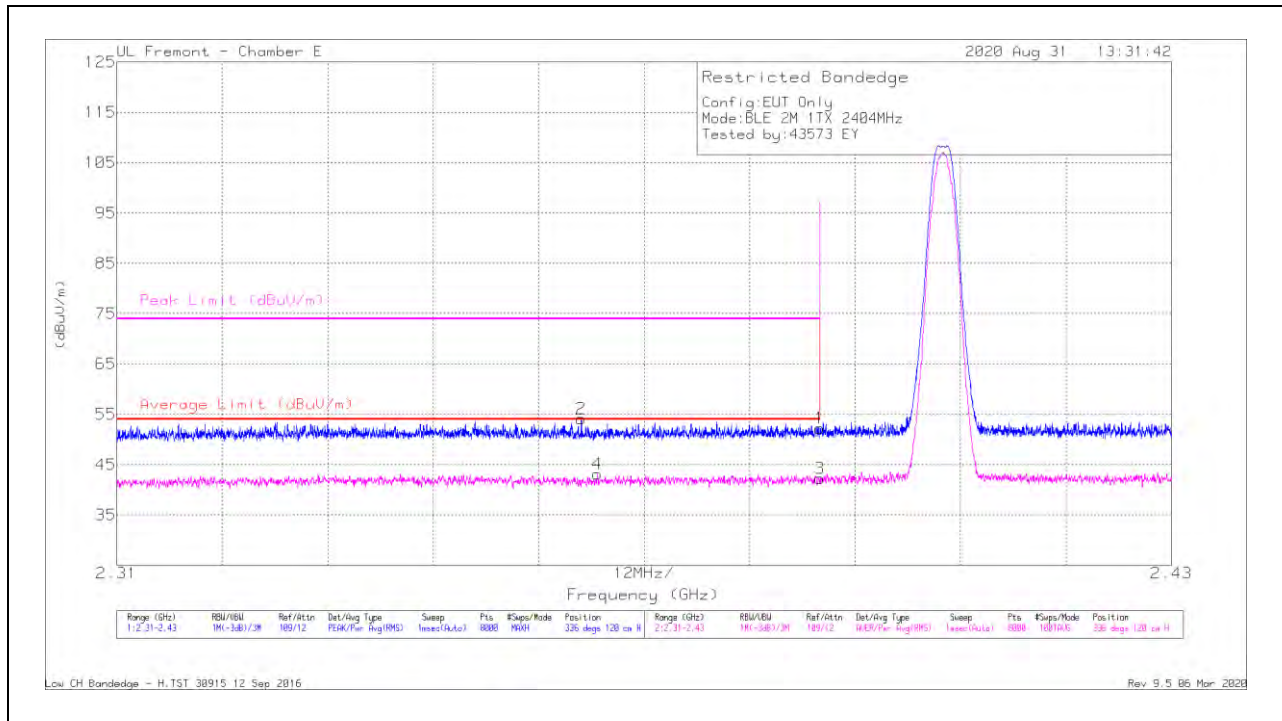


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	38.5	Pk	32.2	-18.4	52.3	-	-	74	-21.7	336	120	H
2	* 2.36285	40.45	Pk	32.1	-18.4	54.15	-	-	74	-19.85	336	120	H
3	* 2.38999	28.45	RMS	32.2	-18.4	42.25	54	-11.75	-	-	336	120	H
4	* 2.36468	29.43	RMS	32.1	-18.4	43.13	54	-10.87	-	-	336	120	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

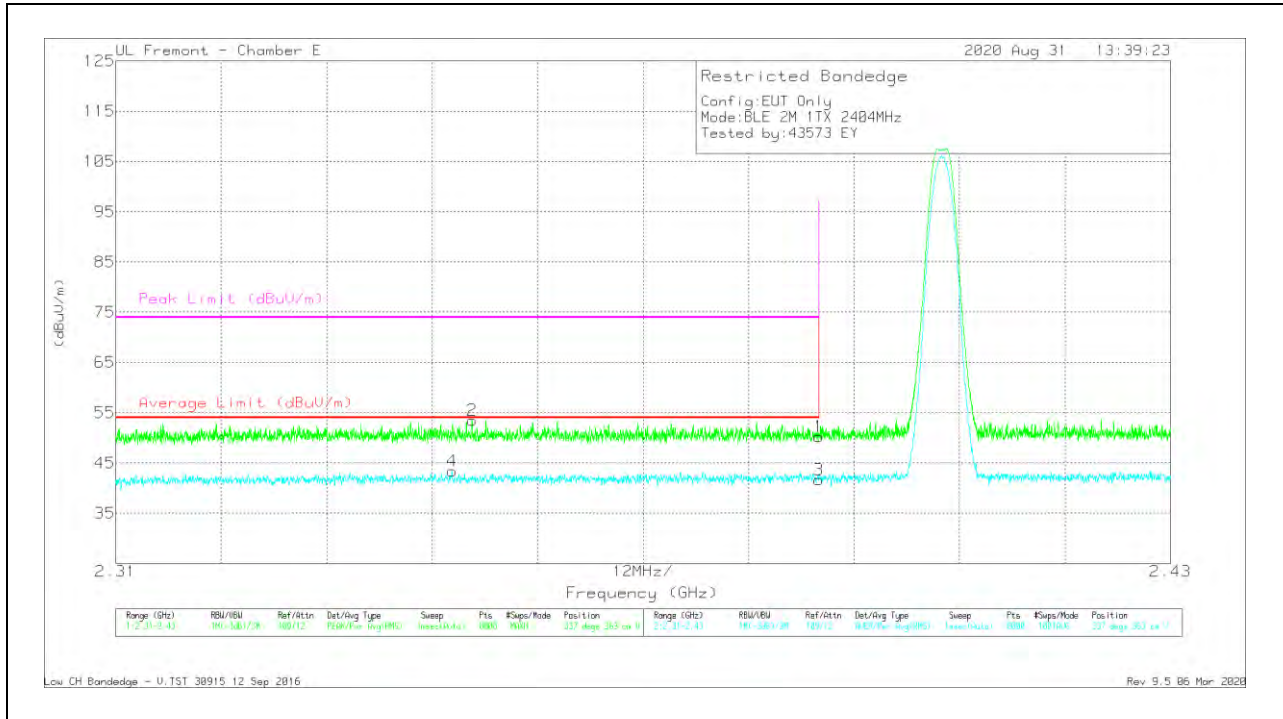


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.34826	29.61	RMS	32.1	-18.3	43.41	54	-10.59	-	-	337	363	V
2	* 2.35054	39.74	PK	32.1	-18.3	53.54	-	-	74	-20.46	337	363	V
1	* 2.38999	36.51	PK	32.2	-18.4	50.31	-	-	74	-23.69	337	363	V
3	* 2.38999	27.85	RMS	32.2	-18.4	41.65	54	-12.35	-	-	337	363	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

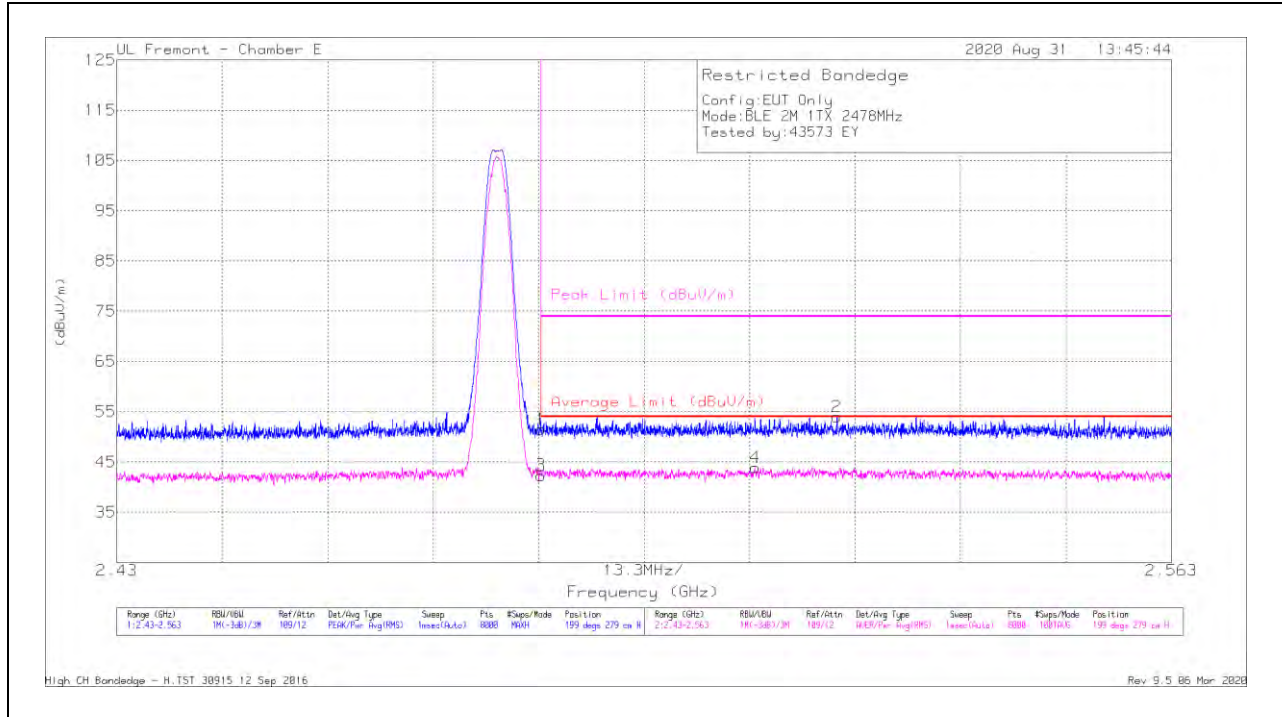

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	37.1	PK	32.8	-18.4	51.5	-	-	74	-22.5	199	279	H
3	* 2.48351	27.94	RMS	32.8	-18.4	42.34	54	-11.66	-	-	199	279	H
4	2.51054	29.35	RMS	32.8	-18.3	43.85	54	-10.15	-	-	199	279	H
2	2.52083	39.55	Pk	32.8	-18.3	54.05	-	-	74	-19.95	199	279	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

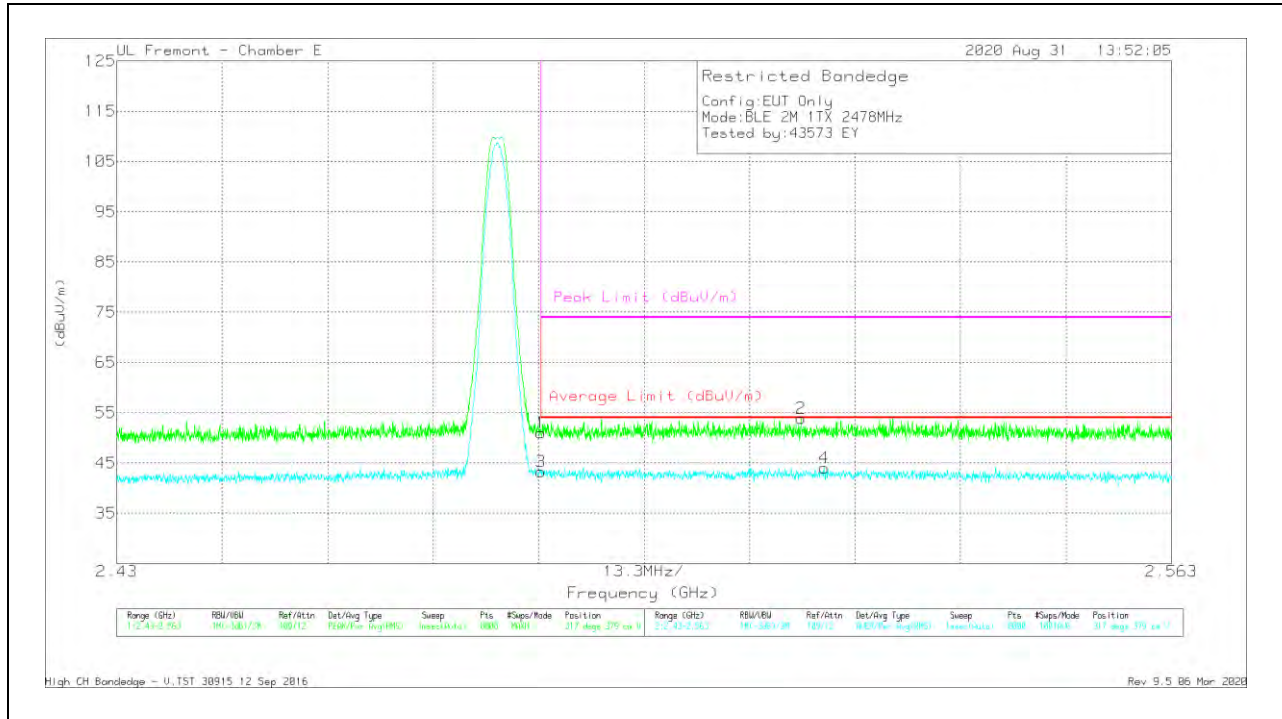


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	36.57	Pk	32.8	-18.4	50.97	-	-	74	-23.03	317	379	V
3	* 2.48351	28.84	RMS	32.8	-18.4	43.24	54	-10.76	-	-	317	379	V
2	2.51629	39.32	Pk	32.9	-18.4	53.82	-	-	74	-20.18	317	379	V
4	2.5192	29.6	RMS	32.8	-18.4	44	54	-10	-	-	317	379	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**ANT 3**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

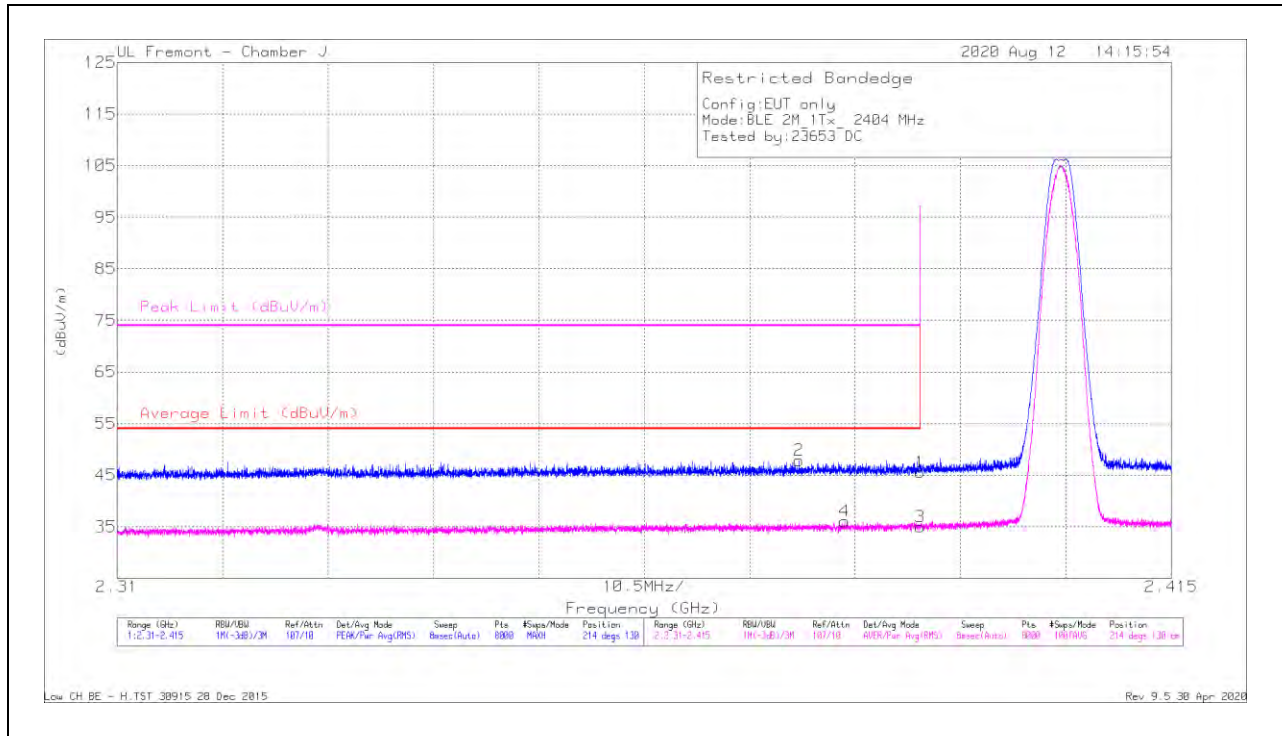

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.27	Pk	29	-14.7	45.57	-	-	74	-28.43	214	130	H
2	* 2.37789	33.53	Pk	29	-14.7	47.83	-	-	74	-26.17	214	130	H
3	* 2.39	20.67	RMS	29	-14.7	34.97	54	-19.03	-	-	214	130	H
4	* 2.38245	21.72	RMS	29	-14.7	36.02	54	-17.98	-	-	214	130	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

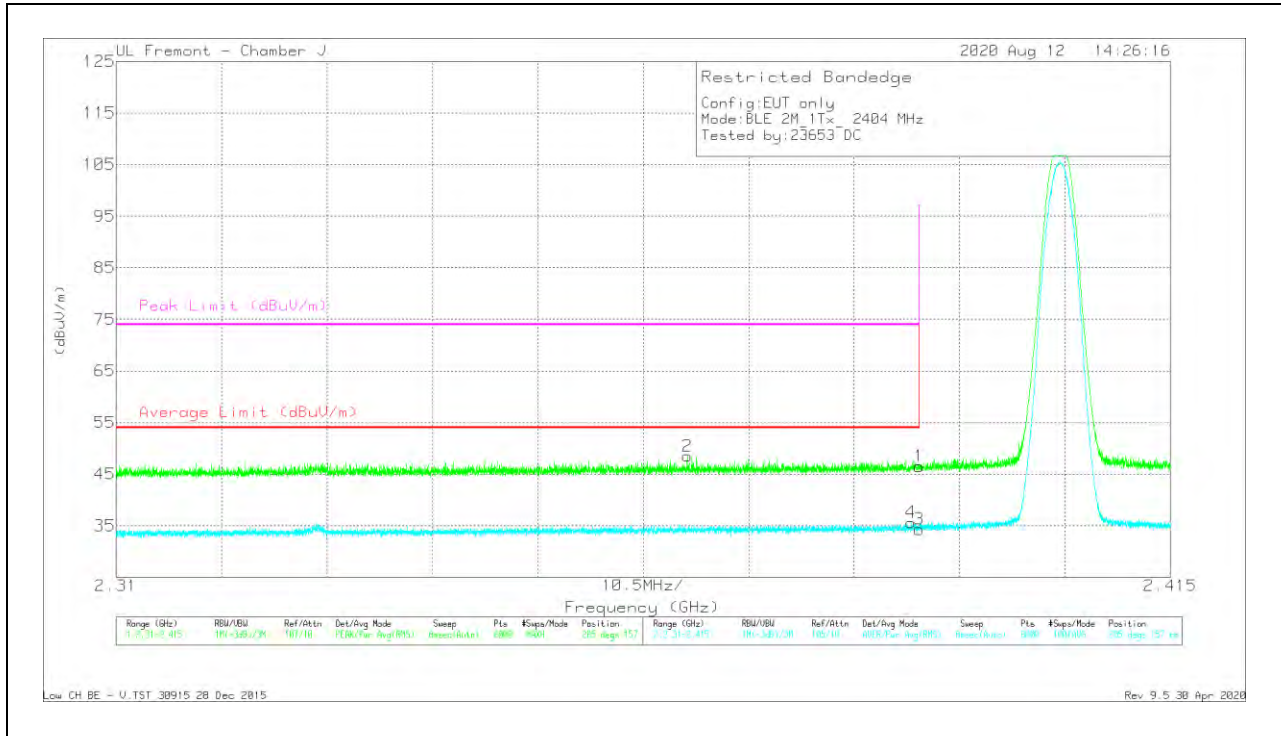


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	32.64	Pk	29.5	-14.6	47.54	-	-	74	-26.46	211	163	H
2	2.55319	34	Pk	29.9	-14.4	49.5	-	-	74	-24.5	211	163	H
3	* 2.4835	21.55	RMS	29.5	-14.6	36.45	54	-17.55	-	-	211	163	H
4	* 2.48356	22.73	RMS	29.5	-14.6	37.63	54	-16.37	-	-	211	163	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

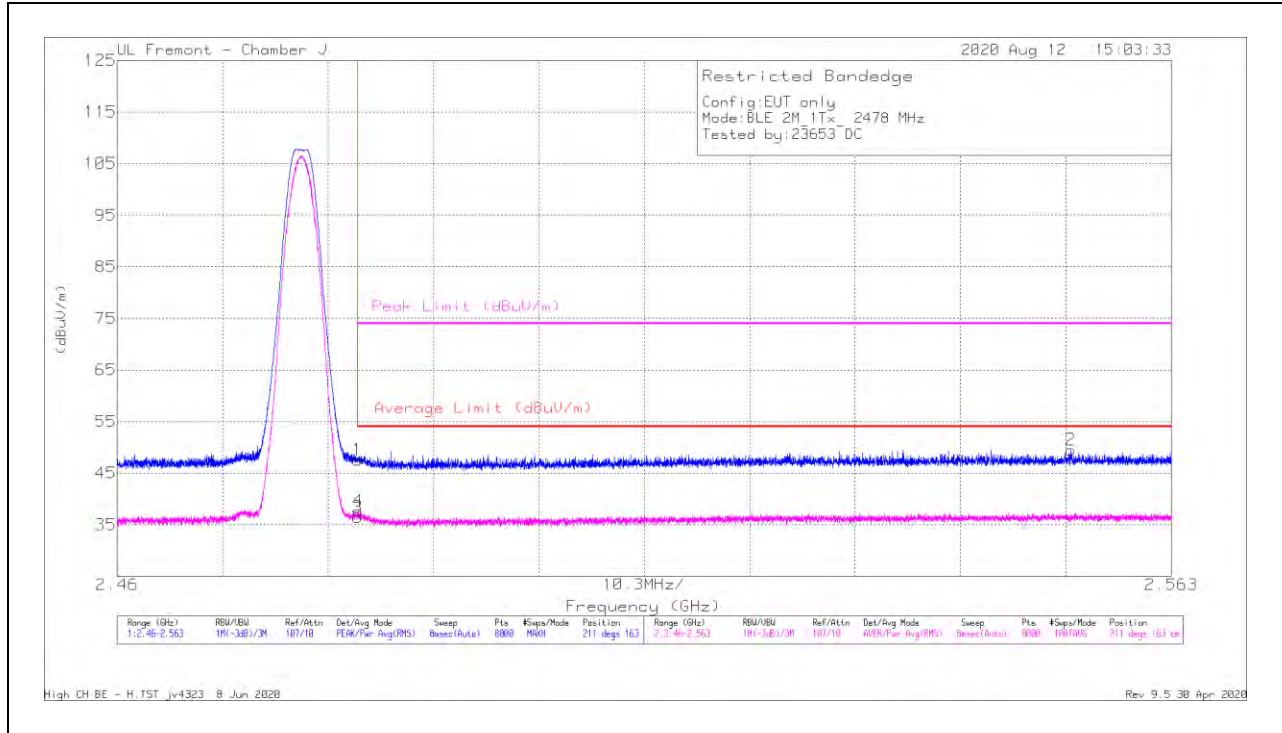


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	32.64	Pk	29.5	-14.6	47.54	-	-	74	-26.46	211	163	H
2	2.55319	34	Pk	29.9	-14.4	49.5	-	-	74	-24.5	211	163	H
3	* 2.4835	21.55	RMS	29.5	-14.6	36.45	54	-17.55	-	-	211	163	H
4	* 2.48356	22.73	RMS	29.5	-14.6	37.63	54	-16.37	-	-	211	163	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



### VERTICAL RESULT

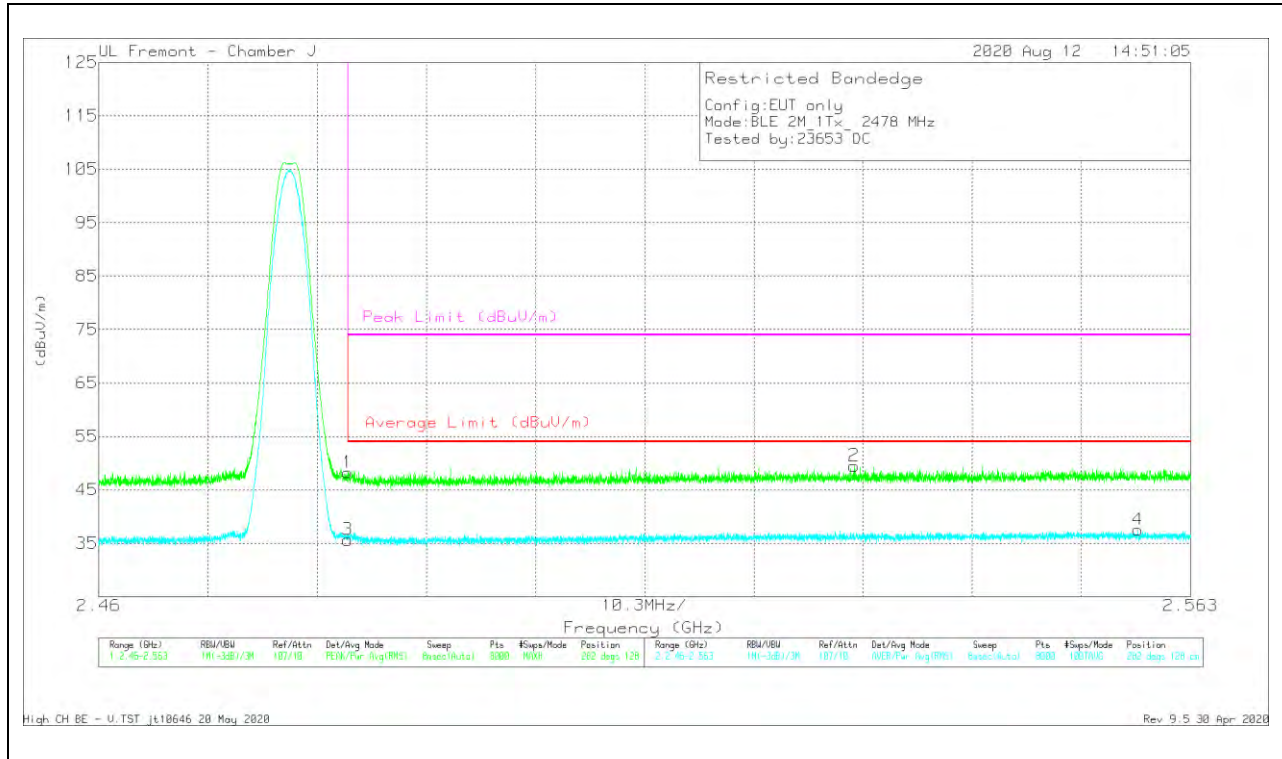

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	33.32	PK	29.5	-14.6	48.22	-	-	74	-25.78	282	128	V
2	2.53125	34.21	PK	29.8	-14.5	49.51	-	-	74	-24.49	282	128	V
3	* 2.4835	20.76	RMS	29.5	-14.6	35.66	54	-18.34	-	-	282	128	V
4	2.55801	22.11	RMS	29.8	-14.4	37.51	54	-16.49	-	-	282	128	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

### 10.2.4. HIGH POWER BLE TXBF (2Mbps)

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

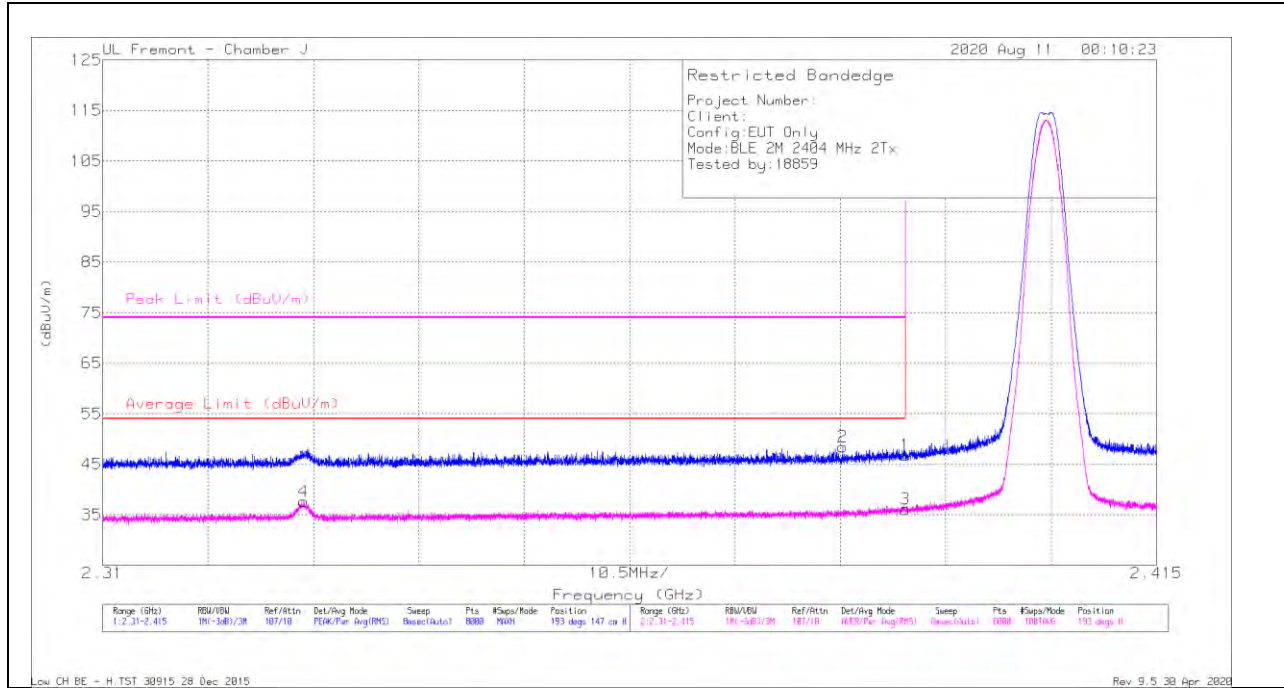

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT963 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	32.5	Pk	29	-14.7	46.8	-	-	74	-27.2	193	147	H
2	* 2.38373	34.16	Pk	29	-14.7	48.46	-	-	74	-25.54	193	147	H
3	* 2.39	21.78	RMS	29	-14.7	36.08	54	-17.92	-	-	193	147	H
4	* 2.33002	23.58	RMS	28.9	-14.9	37.58	54	-16.42	-	-	193	147	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

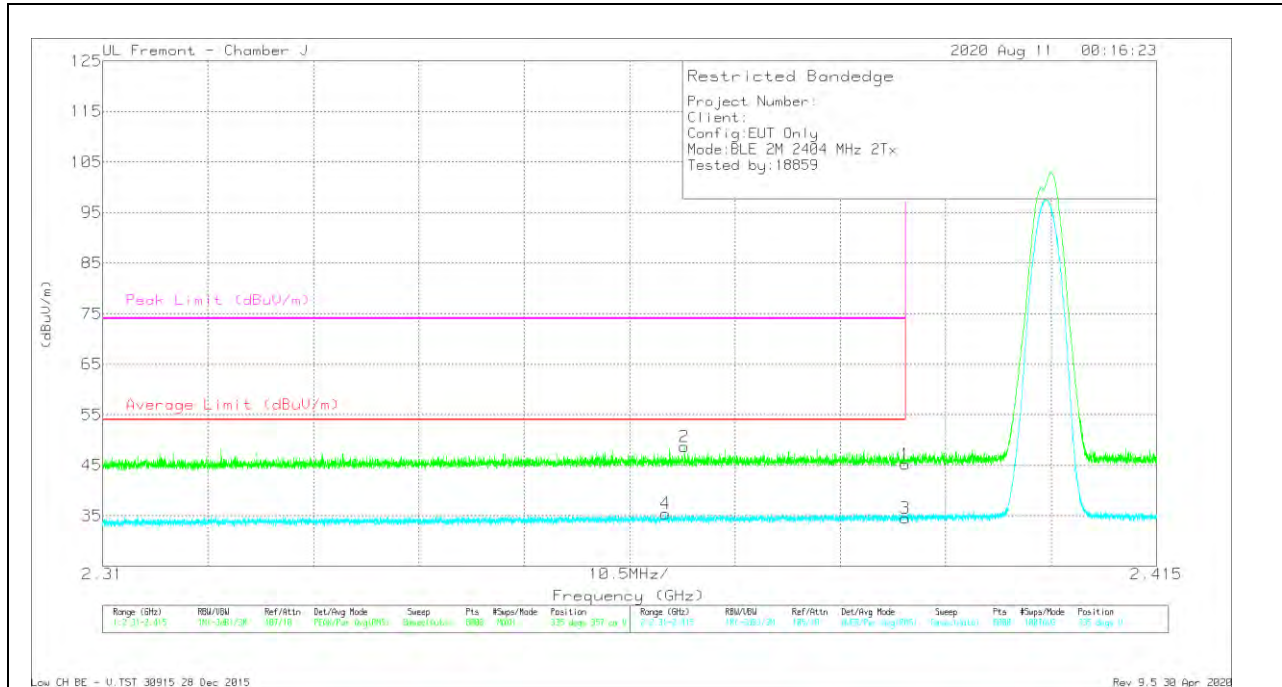


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	30.86	Pk	29	-14.7	45.16	-	-	74	-28.84	335	357	V
2	* 2.36798	34.5	Pk	29	-14.8	48.7	-	-	74	-25.3	335	357	V
3	* 2.39	20.17	RMS	29	-14.7	34.47	54	-19.53	-	-	335	357	V
4	* 2.3661	21.25	RMS	29	-14.8	35.45	54	-18.55	-	-	335	357	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

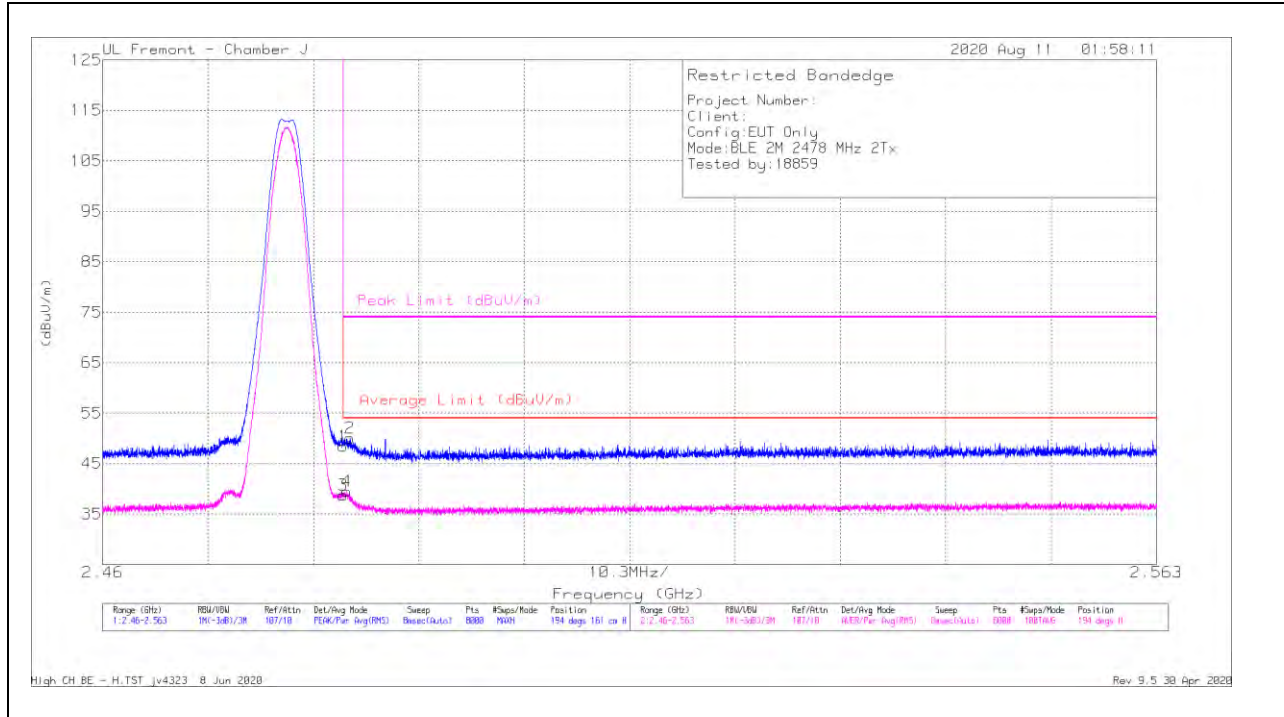

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	33.49	Pk	29.5	-14.6	48.39	-	-	74	-25.61	194	161	H
2	* 2.4842	35.1	Pk	29.5	-14.6	50	-	-	74	-24	194	161	H
3	* 2.4835	23.89	RMS	29.5	-14.6	38.79	54	-15.21	-	-	194	161	H
4	* 2.48386	24.58	RMS	29.5	-14.6	39.48	54	-14.52	-	-	194	161	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

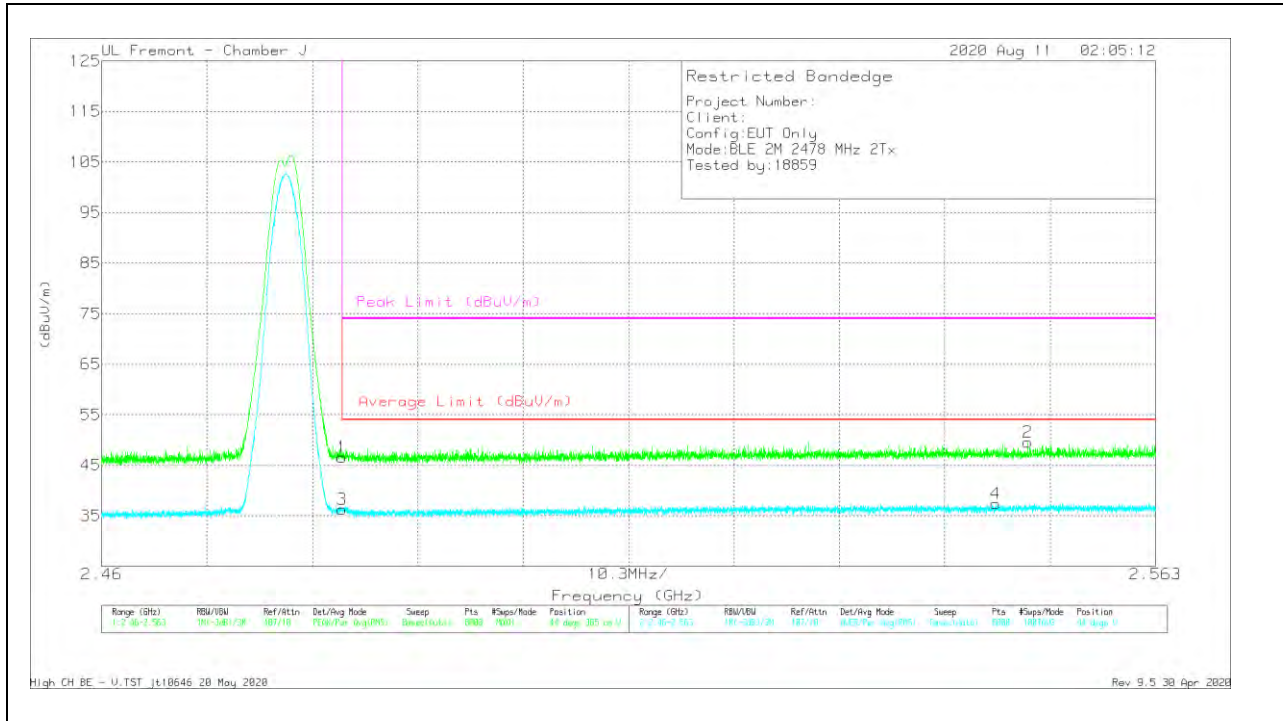

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.61	Pk	29.5	-14.6	46.51	-	-	74	-27.49	44	365	V
2	2.55053	34.11	Pk	29.9	-14.5	49.51	-	-	74	-24.49	44	365	V
3	* 2.4835	21.38	RMS	29.5	-14.6	36.28	54	-17.72	-	-	44	365	V
4	2.54741	22.01	RMS	29.9	-14.5	37.41	54	-16.59	-	-	44	365	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.2.5. LOW POWER BLE (1Mbps)

#### ANT 4

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

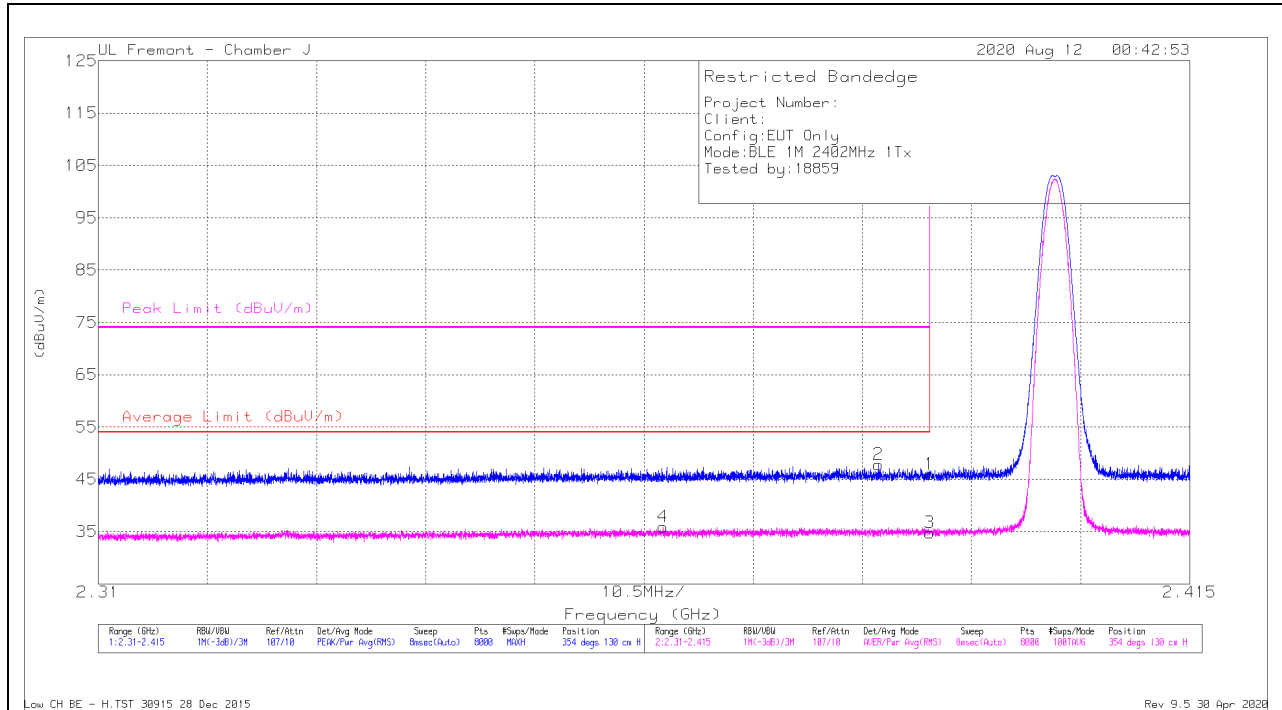


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.63	Pk	29	-14.7	45.93	-	-	74	-28.07	354	130	H
2	* 2.38506	33.56	Pk	29	-14.7	47.86	-	-	74	-26.14	354	130	H
3	* 2.39	20.48	RMS	29	-14.7	34.78	54	-19.22	-	-	354	130	H
4	* 2.36433	21.66	RMS	29	-14.8	35.86	54	-18.14	-	-	354	130	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

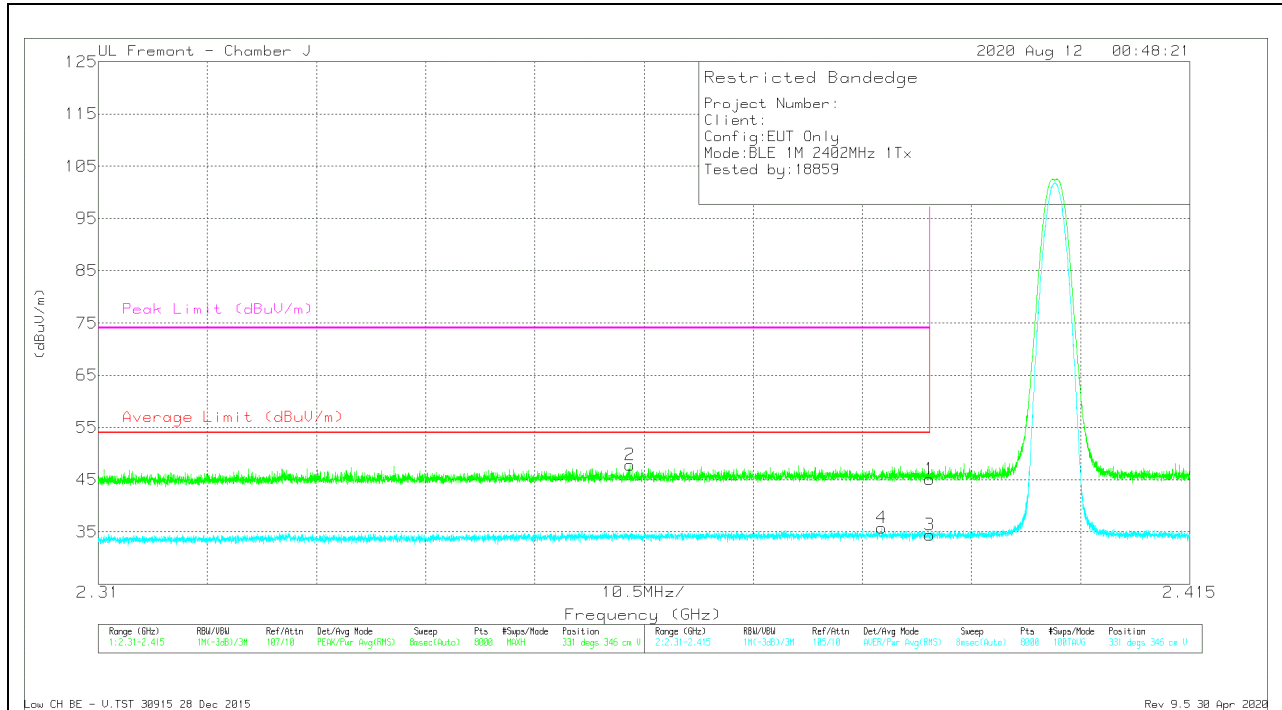


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	30.83	Pk	29	-14.7	45.13	-	-	74	-26.87	331	346	V
2	* 2.36114	33.58	Pk	29	-14.8	47.78	-	-	74	-26.22	331	346	V
3	* 2.39	20.11	RMS	29	-14.7	34.41	54	-19.59	-	-	331	346	V
4	* 2.38539	21.46	RMS	29	-14.7	35.76	54	-18.24	-	-	331	346	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

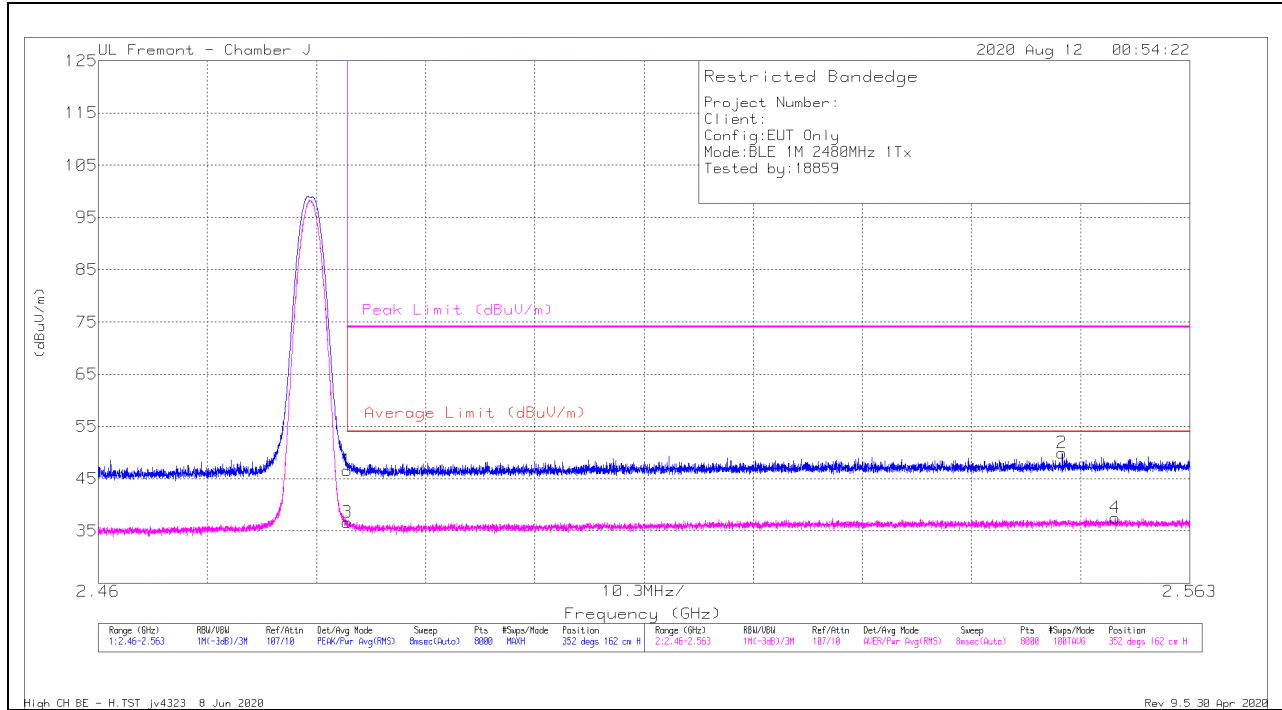


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.69	Pk	29.5	-14.6	46.59	-	-	74	-27.41	352	162	H
2	2.55096	34.49	Pk	29.9	-14.5	49.89	-	-	74	-24.11	352	162	H
3	* 2.4835	21.73	RMS	29.5	-14.6	36.63	54	-17.37	-	-	352	162	H
4	2.55599	22.07	RMS	29.8	-14.4	37.47	54	-16.53	-	-	352	162	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



### VERTICAL RESULT

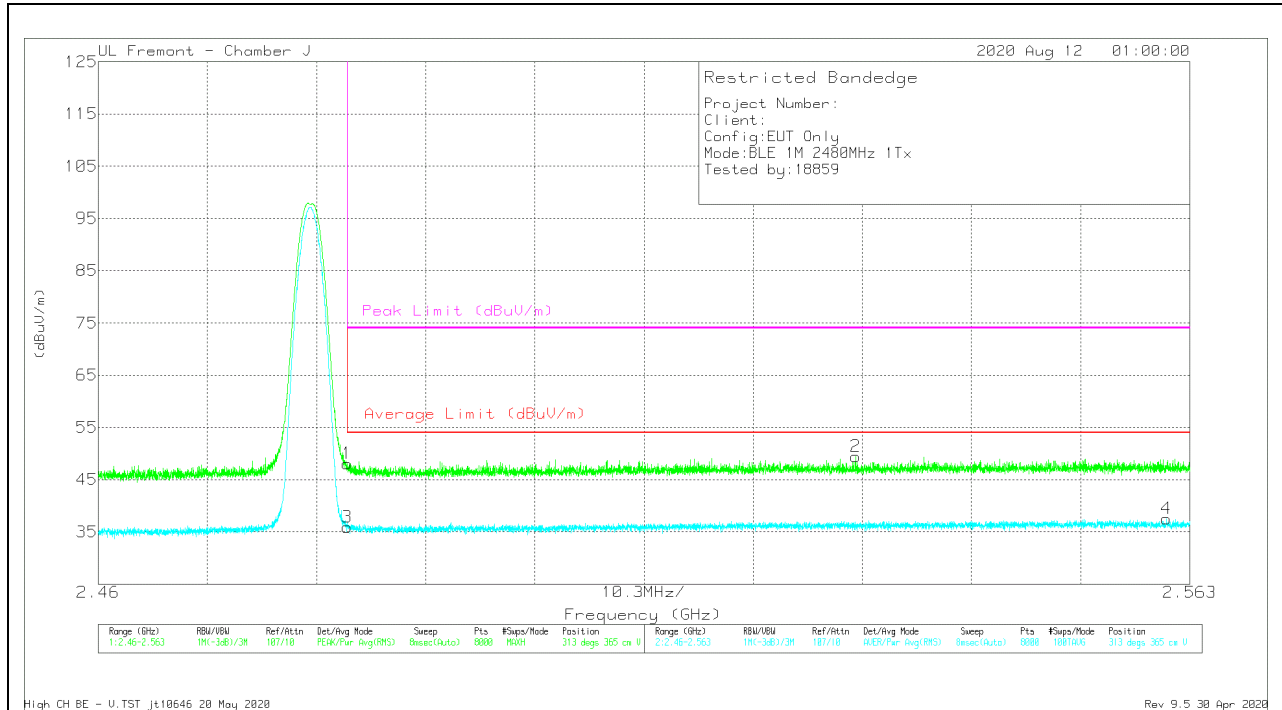


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	33.2	Pk	29.5	-14.6	48.1	-	-	74	-25.9	313	365	V
2	2.53145	34.14	PK	29.8	-14.5	49.44	-	-	74	-24.56	313	365	V
3	* 2.4835	21.03	RMS	29.5	-14.6	35.93	54	-18.07	-	-	313	365	V
4	2.56079	22.09	RMS	29.8	-14.4	37.49	54	-16.51	-	-	313	365	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**ANT 3**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

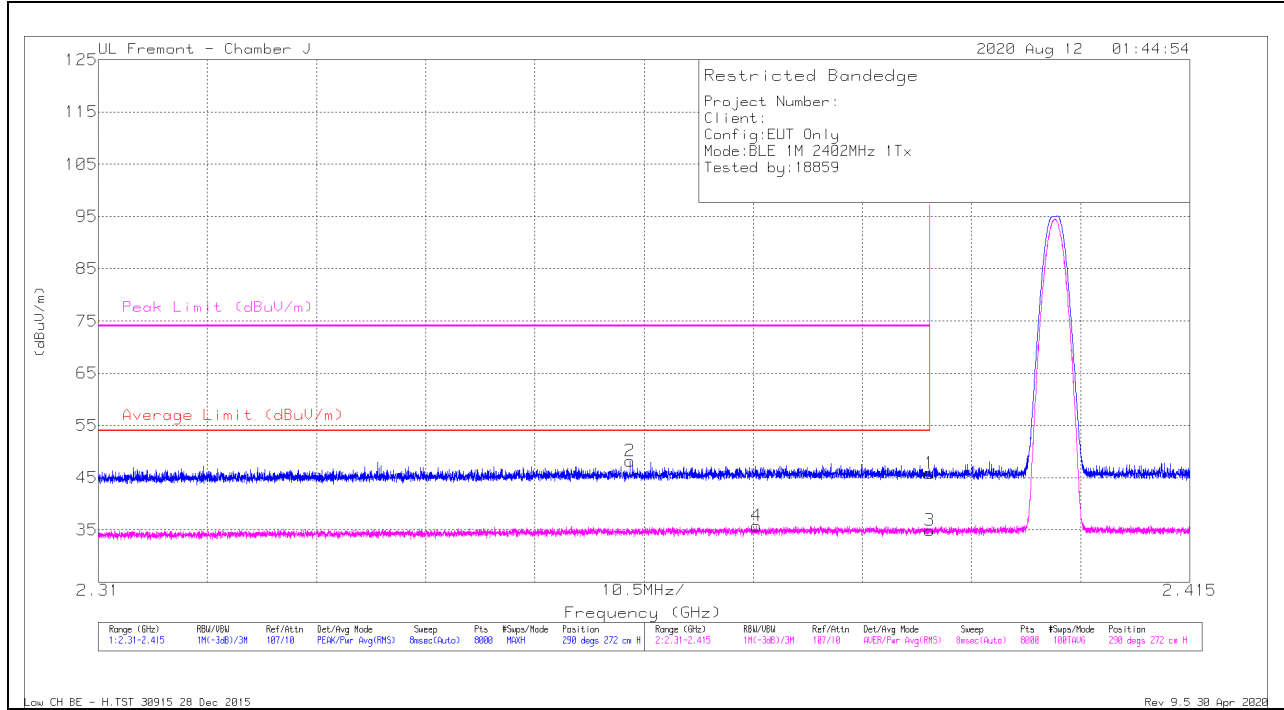

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.57	Pk	29	-14.7	45.87	-	-	74	-28.13	290	272	H
2	* 2.36114	33.98	Pk	29	-14.8	48.18	-	-	74	-25.82	290	272	H
3	* 2.39	20.6	RMS	29	-14.7	34.9	54	-19.1	-	-	290	272	H
4	* 2.3733	21.54	RMS	29	-14.8	35.74	54	-18.26	-	-	290	272	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

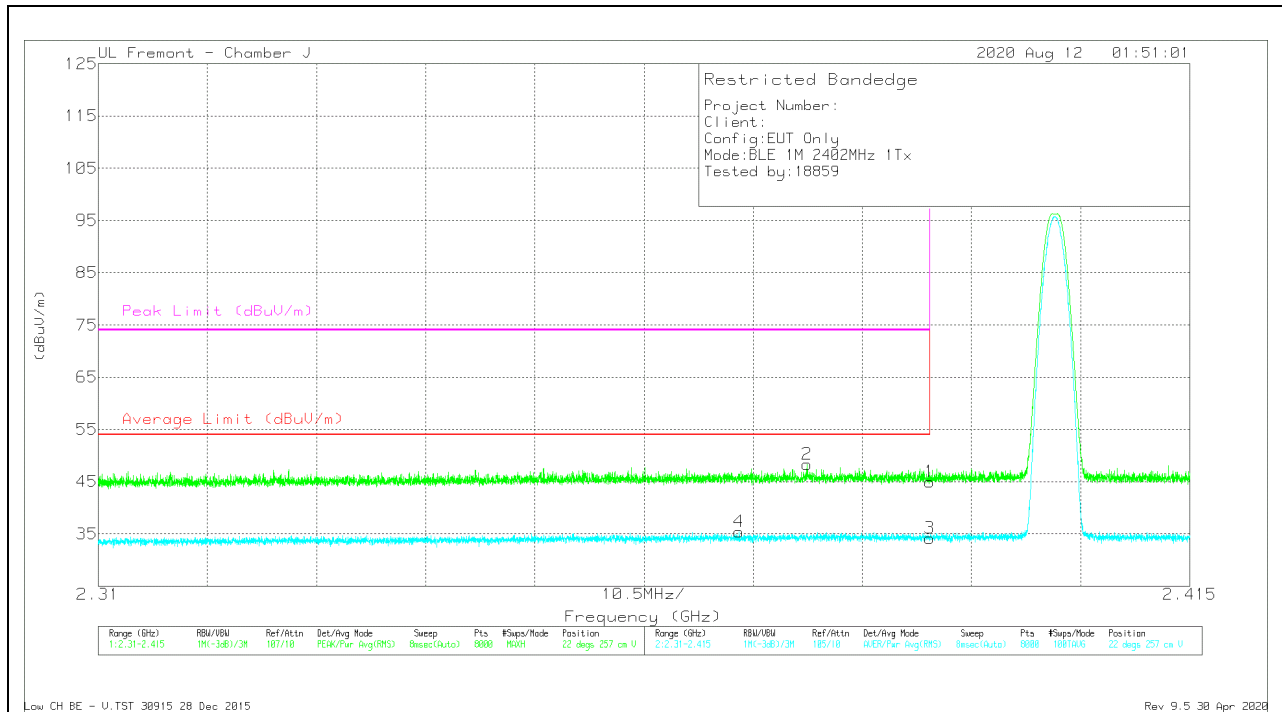


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	30.69	Pk	29	-14.7	44.99	-	-	74	-29.01	22	257	V
2	* 2.37821	34.06	Pk	29	-14.7	48.36	-	-	74	-25.64	22	257	V
3	* 2.39	19.83	RMS	29	-14.7	34.13	54	-19.87	-	-	22	257	V
4	* 2.37166	21.2	RMS	29	-14.8	35.4	54	-18.6	-	-	22	257	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

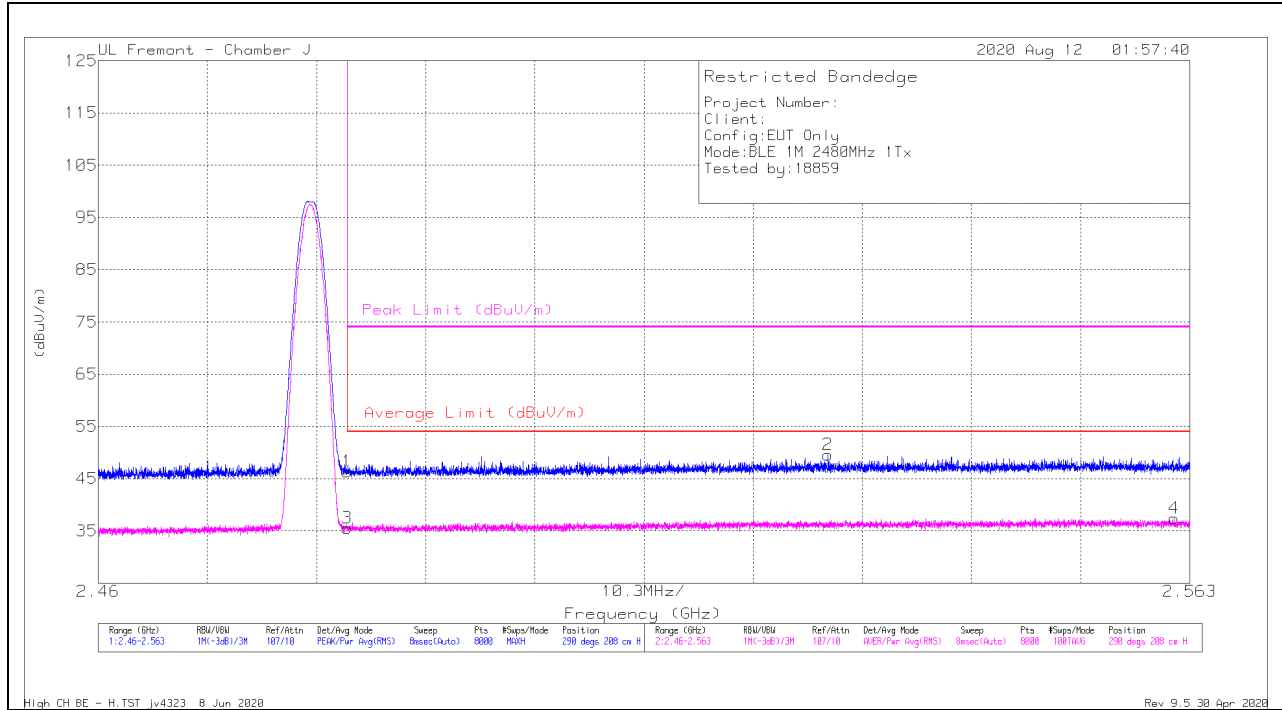

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.37	Pk	29.5	-14.6	46.27	-	-	74	-27.73	290	208	H
2	2.52884	34.2	Pk	29.8	-14.5	49.5	-	-	74	-24.5	290	208	H
3	* 2.4835	20.57	RMS	29.5	-14.6	35.47	54	-18.53	-	-	290	208	H
4	2.56154	22	RMS	29.8	-14.4	37.4	54	-16.6	-	-	290	208	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

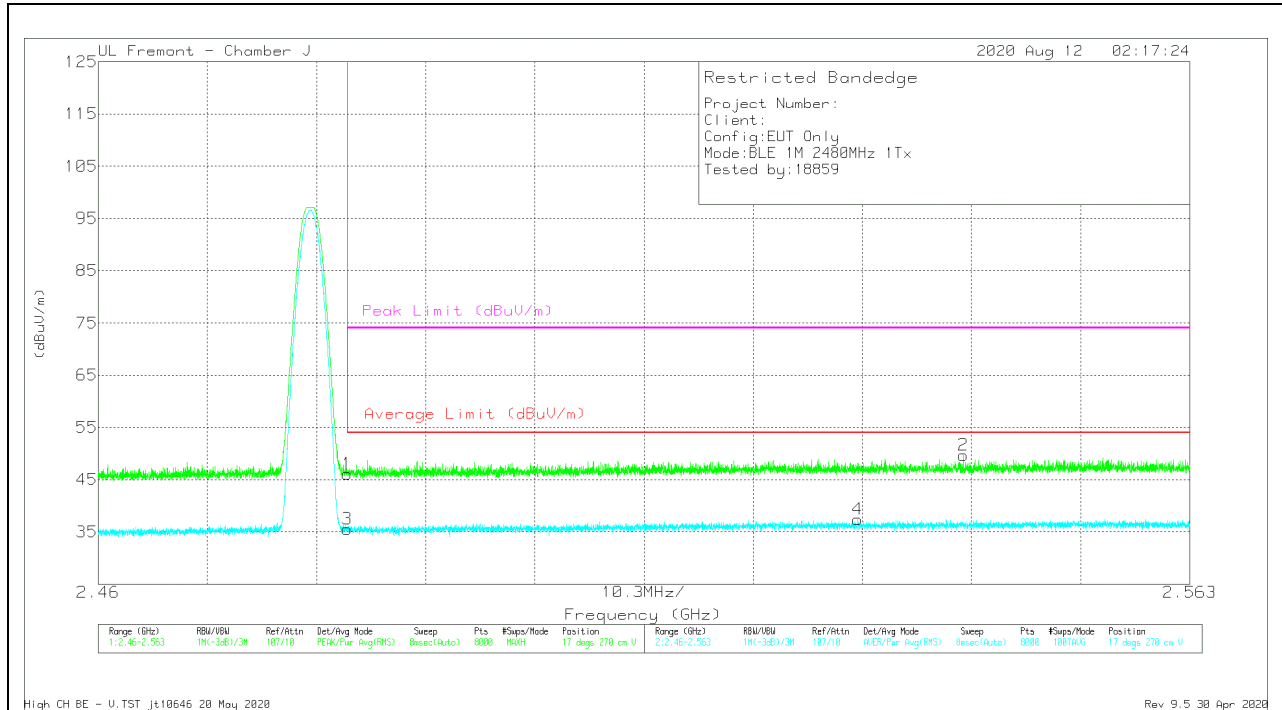


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.21	Pk	29.5	-14.6	46.11	-	-	74	-27.89	17	270	V
2	2.54164	34.4	PK	29.8	-14.5	49.7	-	-	74	-24.3	17	270	V
3	* 2.4835	20.65	RMS	29.5	-14.6	35.55	54	-18.45	-	-	17	270	V
4	2.53165	22.09	RMS	29.8	-14.5	37.39	54	-16.61	-	-	17	270	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.2.6. LOW POWER BLE TXBF (1Mbps)

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

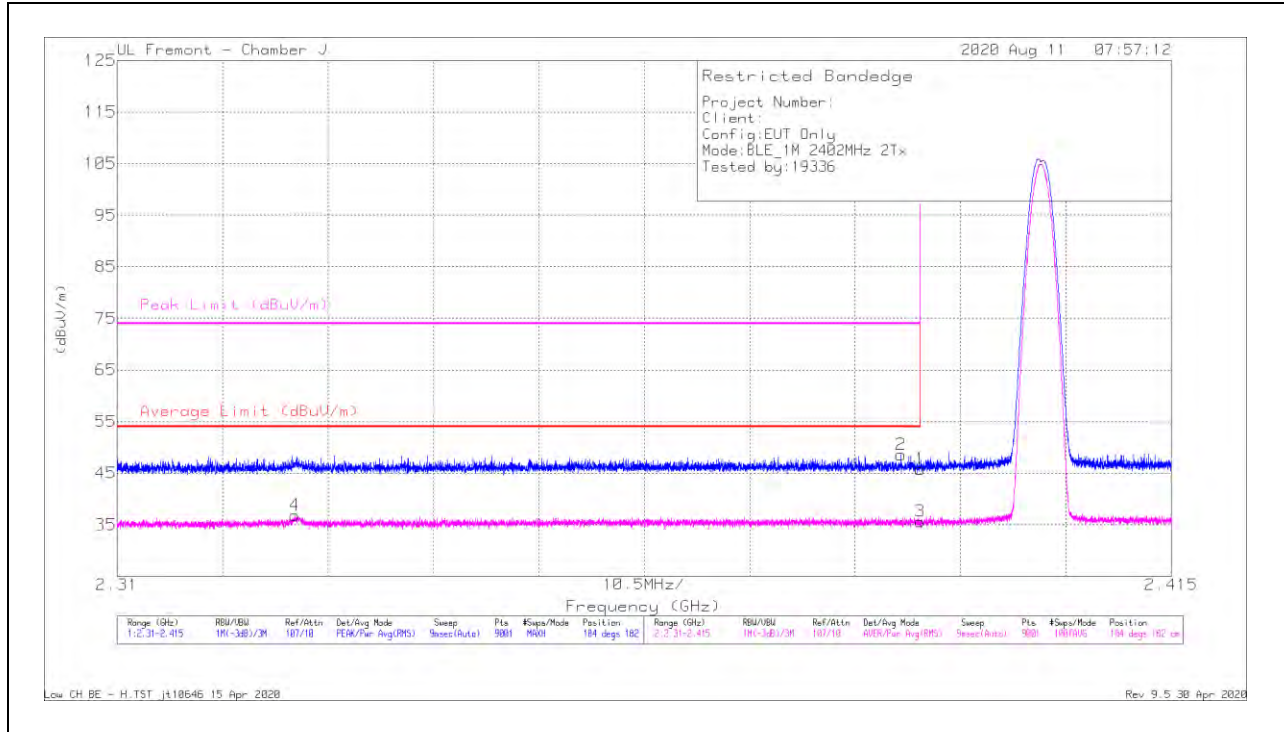

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.26	Pk	29	-25.5	45.76	-	-	74	-28.24	184	182	H
2	* 2.38806	45.07	Pk	29	-25.5	48.57	-	-	74	-25.43	184	182	H
3	* 2.38999	32.13	RMS	29	-25.5	35.63	54	-18.37	-	-	184	182	H
4	* 2.32768	33.52	RMS	28.9	-25.6	36.82	54	-17.18	-	-	184	182	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

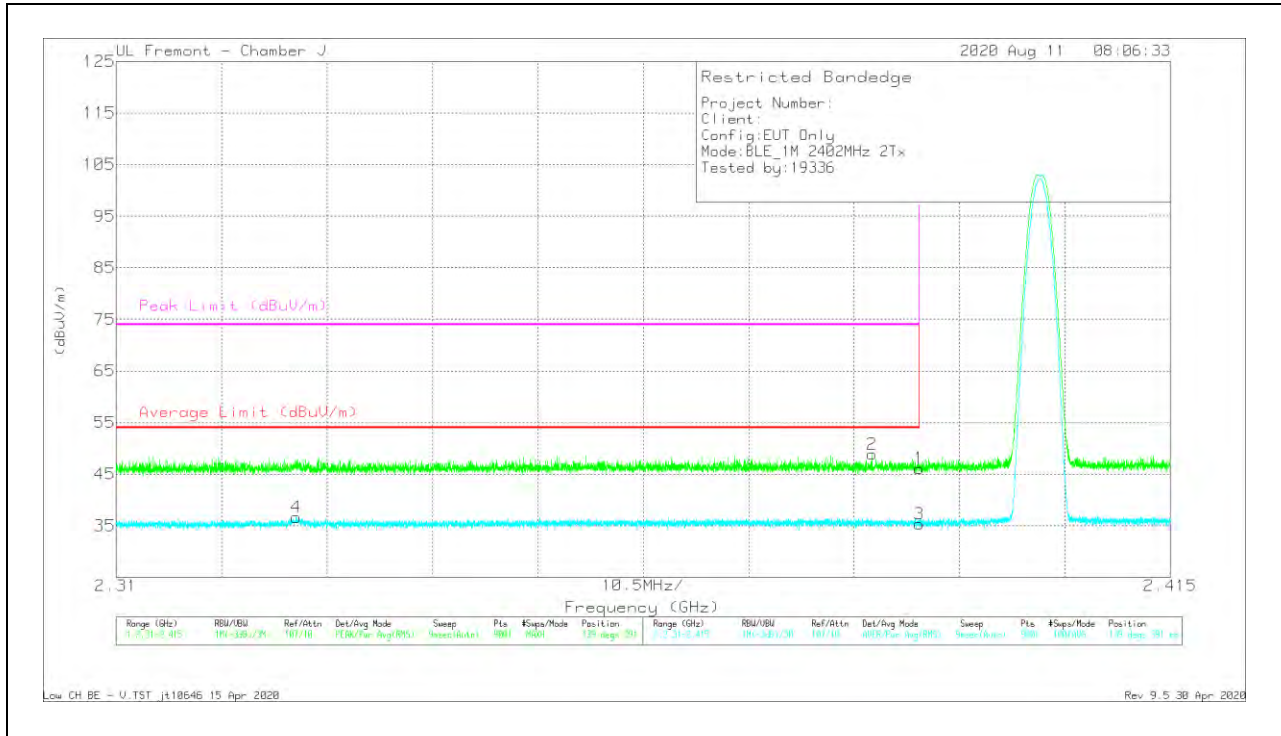


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.57	Pk	29	-25.5	46.07	-	-	74	-27.93	139	391	V
2	* 2.38528	45.36	Pk	29	-25.5	48.86	-	-	74	-25.14	139	391	V
3	* 2.38999	31.84	RMS	29	-25.5	35.34	54	-18.66	-	-	139	391	V
4	* 2.32796	33.33	RMS	28.9	-25.6	36.63	54	-17.37	-	-	139	391	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

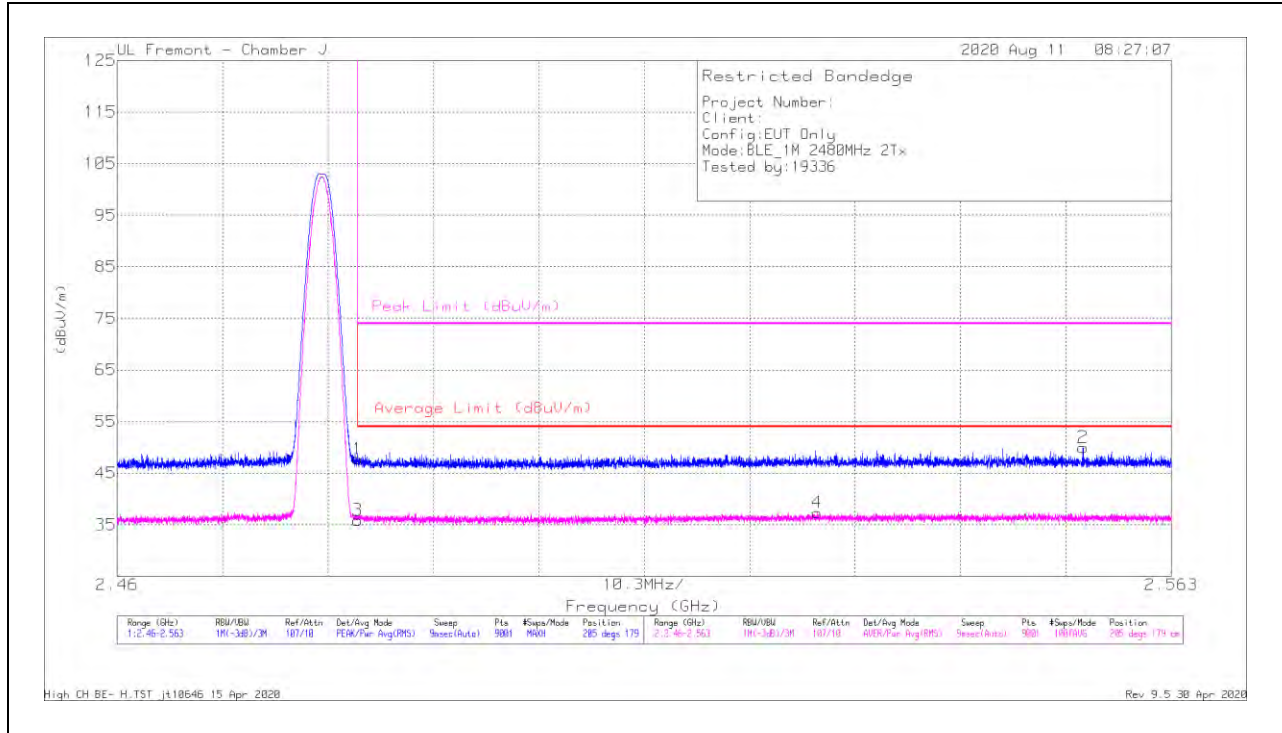

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.75	Pk	29.5	-25.5	47.75	-	-	74	-26.25	205	179	H
2	2.55437	45.49	Pk	29.9	-25.4	49.99	-	-	74	-24.01	205	179	H
3	* 2.48351	31.86	RMS	29.5	-25.5	35.86	54	-18.14	-	-	205	179	H
4	2.5284	32.94	RMS	29.8	-25.4	37.34	54	-16.66	-	-	205	179	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection



### VERTICAL RESULT

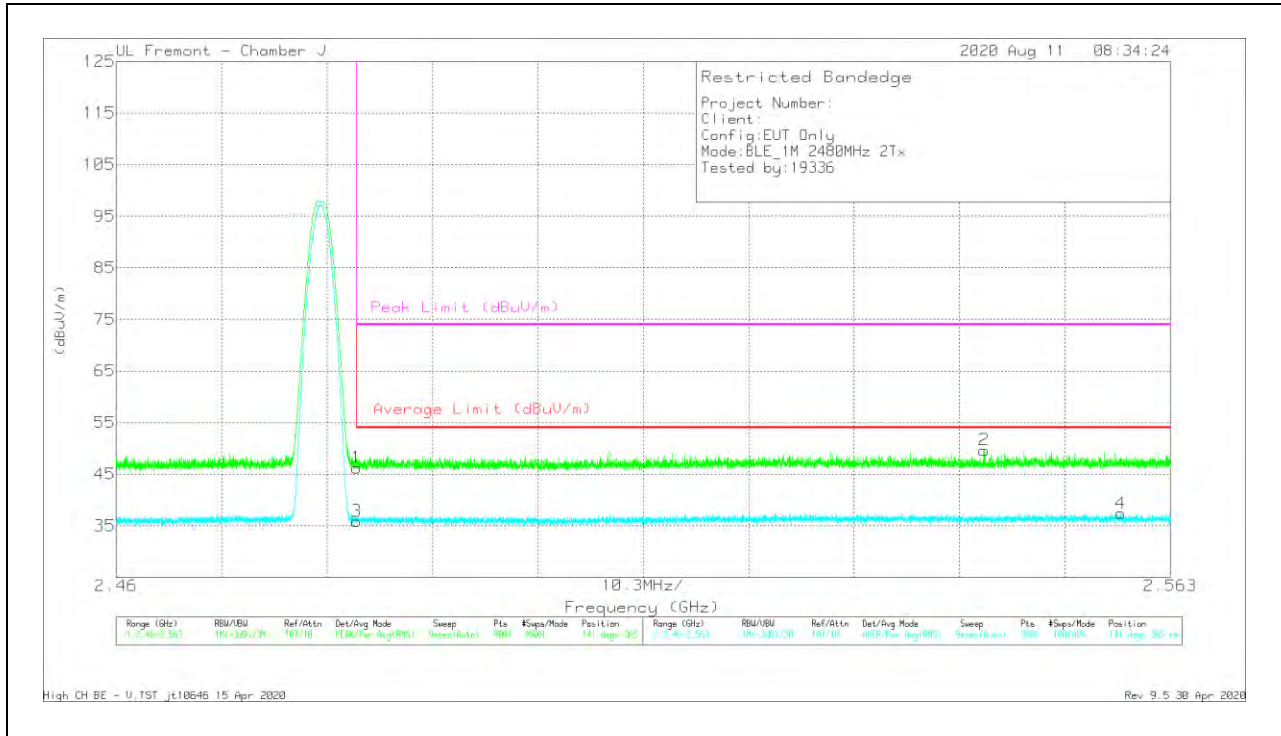

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.24	Pk	29.5	-25.5	46.24	-	-	74	-27.76	141	365	V
2	2.5448	45.24	Pk	29.8	-25.4	49.64	-	-	74	-24.36	141	365	V
3	* 2.48351	31.84	RMS	29.5	-25.5	35.84	54	-18.16	-	-	141	365	V
4	2.55816	32.99	RMS	29.8	-25.4	37.39	54	-16.61	-	-	141	365	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.2.7. LOW POWER BLE (2Mbps)

#### ANT 4

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

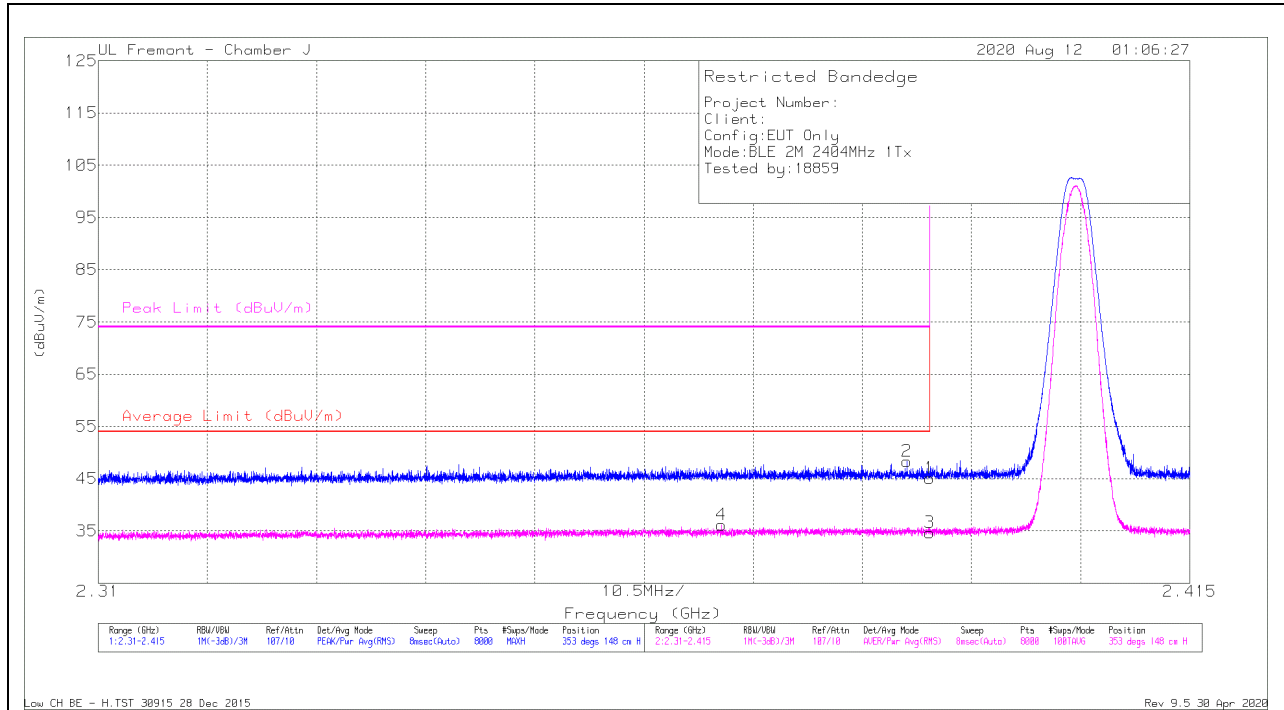


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	30.81	Pk	29	-14.7	45.11	-	-	74	-28.89	353	148	H
2	* 2.38779	34.04	Pk	29	-14.7	48.34	-	-	74	-25.66	353	148	H
3	* 2.39	20.32	RMS	29	-14.7	34.62	54	-19.38	-	-	353	148	H
4	* 2.36995	21.93	RMS	29	-14.8	36.13	54	-17.87	-	-	353	148	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

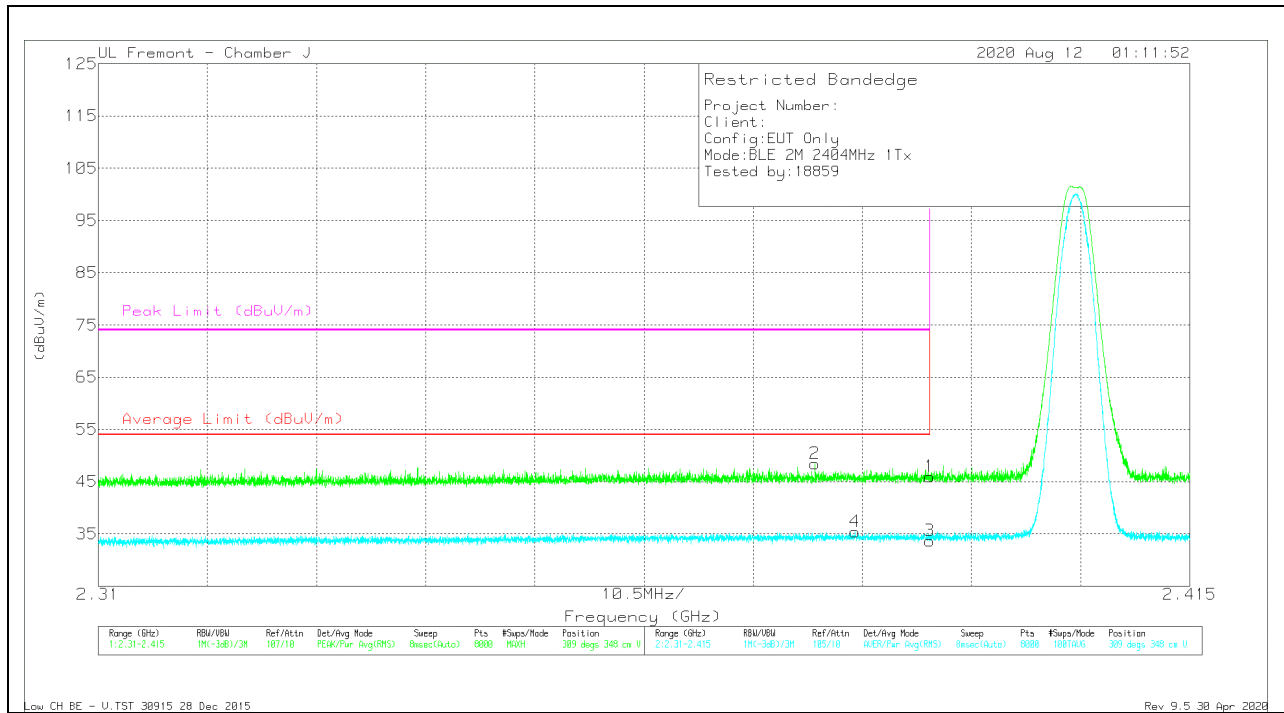


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.63	Pk	29	-14.7	45.93	-	-	74	-28.07	309	348	V
2	* 2.37896	34.14	Pk	29	-14.7	48.44	-	-	74	-25.56	309	348	V
3	* 2.39	19.3	RMS	29	-14.7	33.6	54	-20.4	-	-	309	348	V
4	* 2.3828	21.04	RMS	29	-14.7	35.34	54	-18.66	-	-	309	348	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

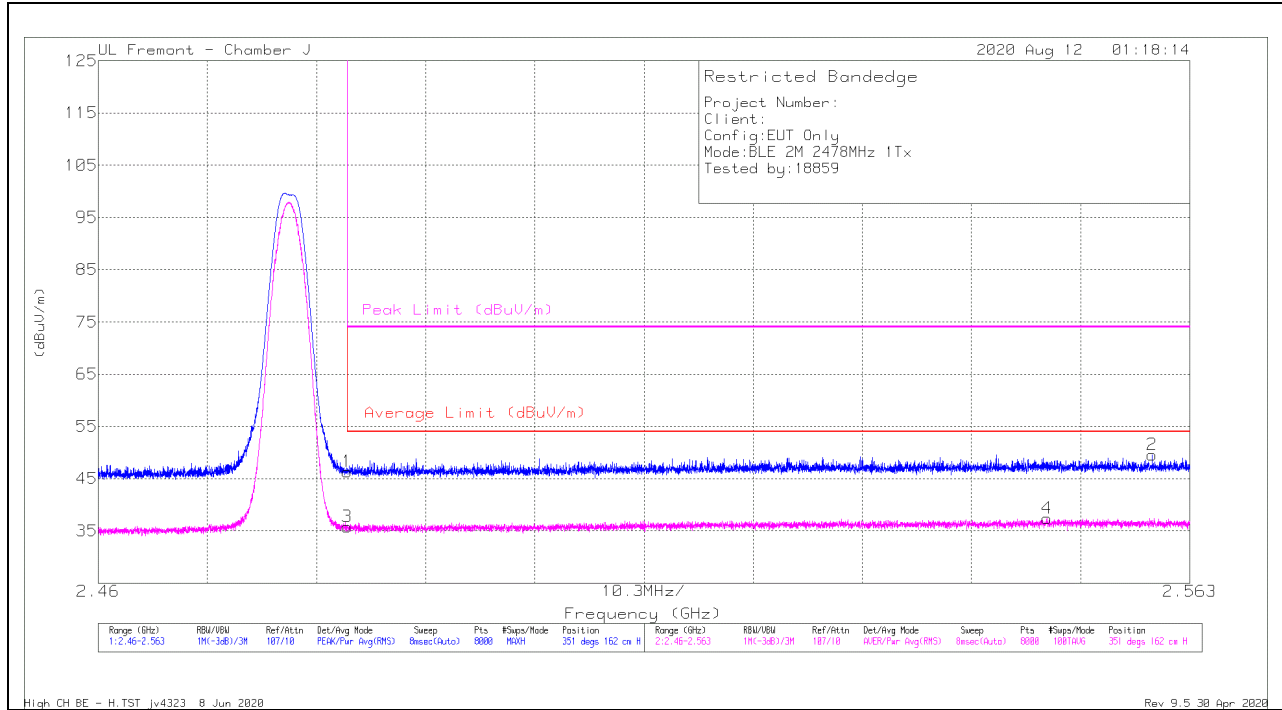

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.45	Pk	29.5	-14.6	46.35	-	-	74	-27.65	351	162	H
2	2.55946	34.14	Pk	29.8	-14.4	49.54	-	-	74	-24.46	351	162	H
3	* 2.4835	20.82	RMS	29.5	-14.6	35.72	54	-18.28	-	-	351	162	H
4	2.54952	21.94	RMS	29.9	-14.5	37.34	54	-16.66	-	-	351	162	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

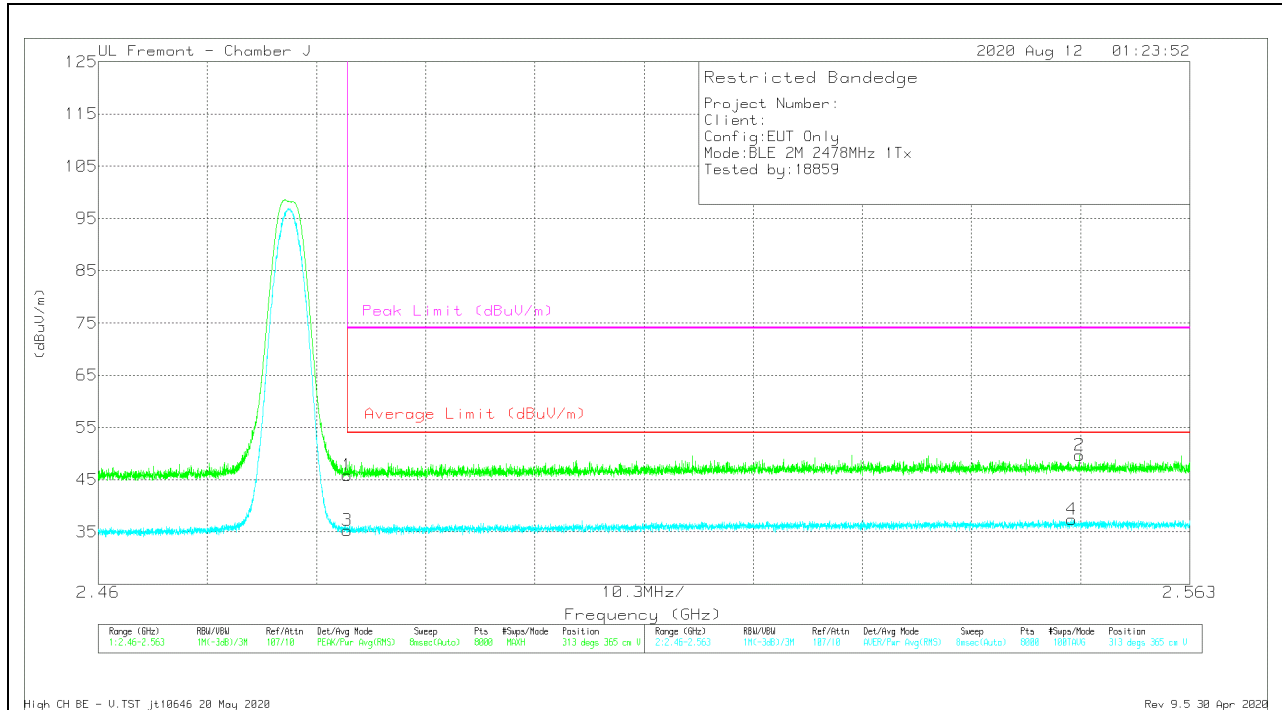


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	30.9	Pk	29.5	-14.6	45.8	-	-	74	-28.2	313	365	V
2	2.55259	34.22	Pk	29.9	-14.4	49.72	-	-	74	-24.28	313	365	V
3	* 2.4835	20.37	RMS	29.5	-14.6	35.27	54	-18.73	-	-	313	365	V
4	2.55185	21.87	RMS	29.9	-14.4	37.37	54	-16.63	-	-	313	365	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**ANT 3**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

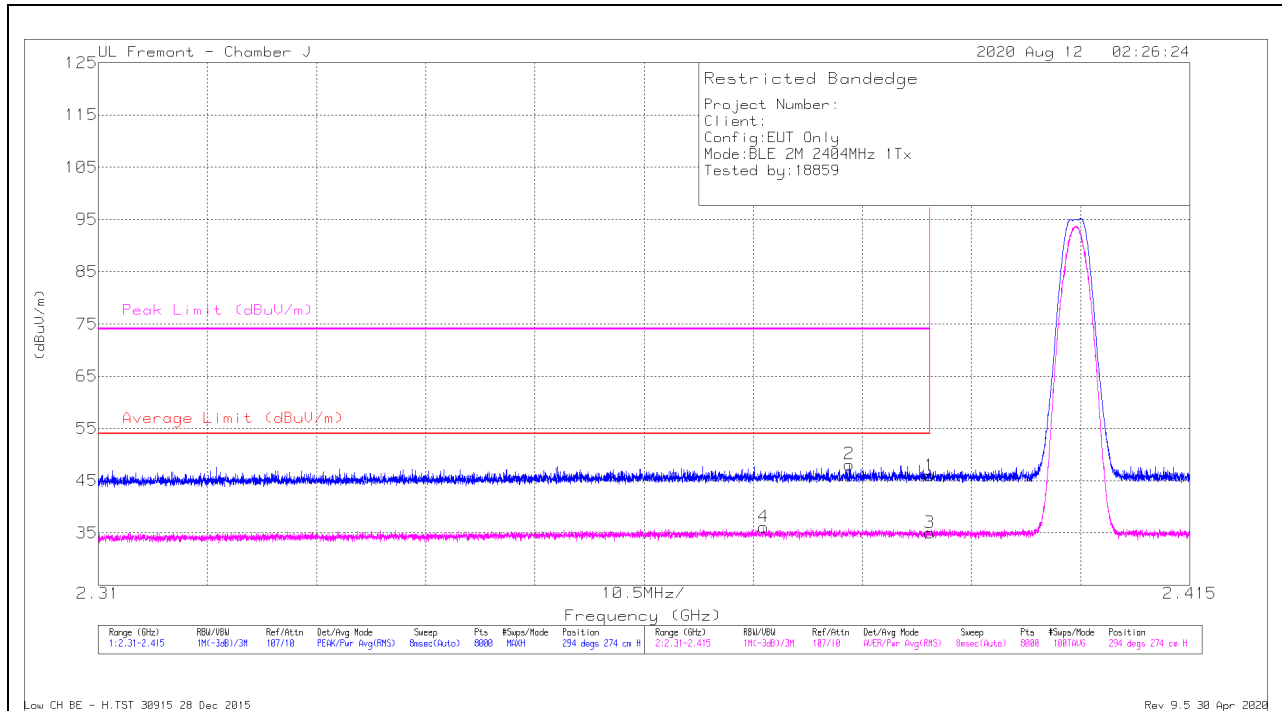

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.6	Pk	29	-14.7	45.9	-	-	74	-28.1	294	274	H
2	* 2.38225	33.82	Pk	29	-14.7	48.12	-	-	74	-25.88	294	274	H
3	* 2.39	20.72	RMS	29	-14.7	35.02	54	-18.98	-	-	294	274	H
4	* 2.37398	21.88	RMS	29	-14.8	36.08	54	-17.92	-	-	294	274	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

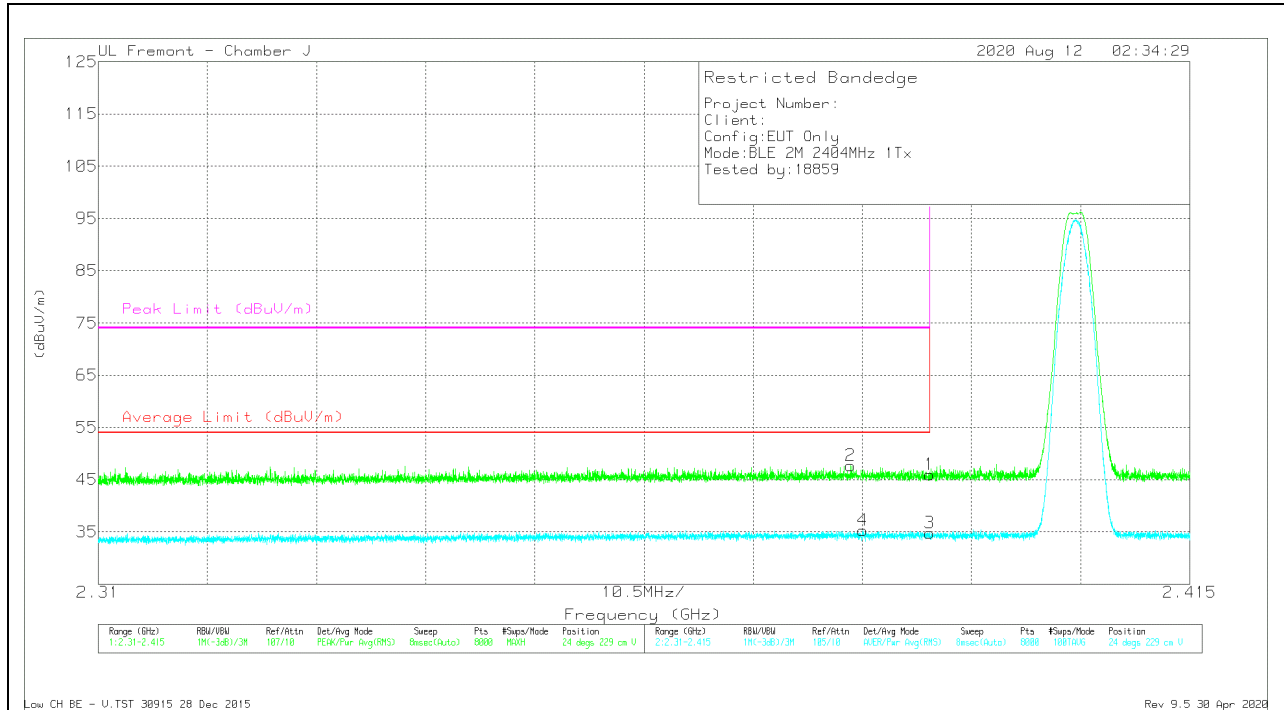


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/PA d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.62	Pk	29	-14.7	45.92	-	-	74	-26.08	24	229	V
2	* 2.38236	33.41	Pk	29	-14.7	47.71	-	-	74	-26.29	24	229	V
3	* 2.39	20.52	RMS	29	-14.7	34.82	54	-19.18	-	-	24	229	V
4	* 2.38355	20.97	RMS	29	-14.7	35.27	54	-18.73	-	-	24	229	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

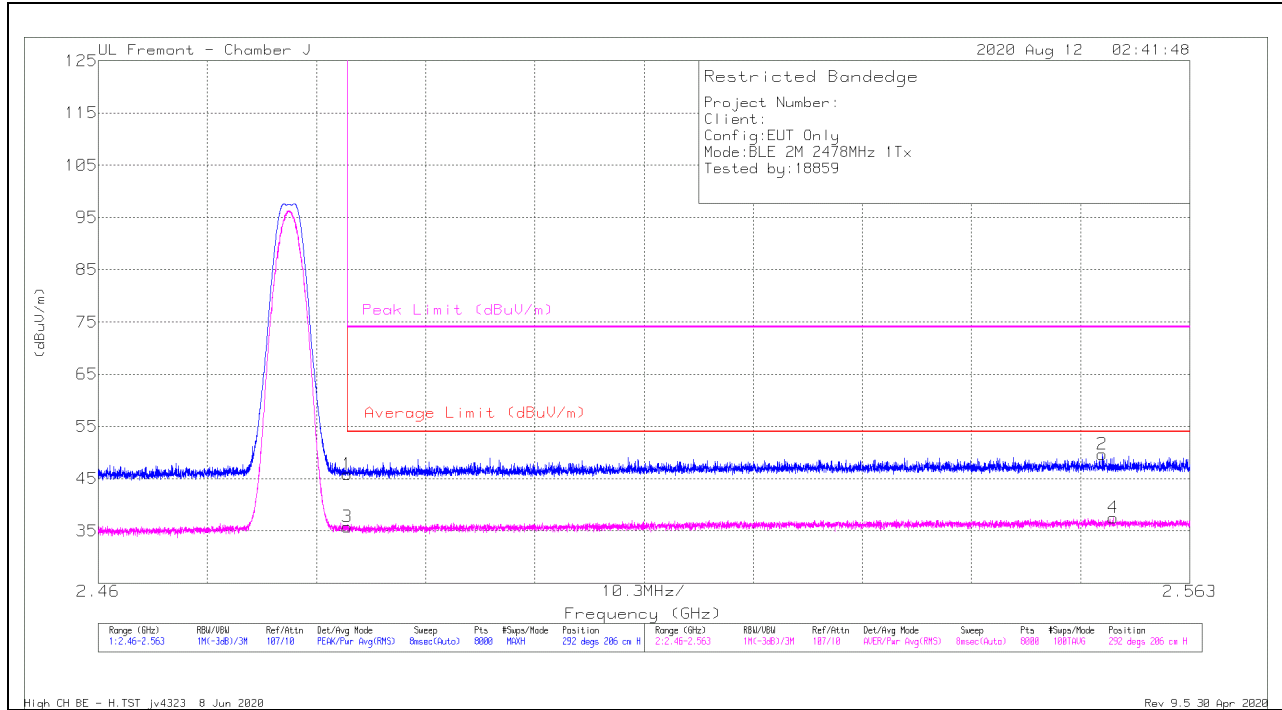


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	30.89	Pk	29.5	-14.6	45.79	-	-	74	-28.21	292	206	H
2	2.55476	34.15	Pk	29.9	-14.4	49.65	-	-	74	-24.35	292	206	H
3	* 2.4835	20.89	RMS	29.5	-14.6	35.79	54	-18.21	-	-	292	206	H
4	2.55578	22.05	RMS	29.8	-14.4	37.45	54	-16.55	-	-	292	206	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



### VERTICAL RESULT

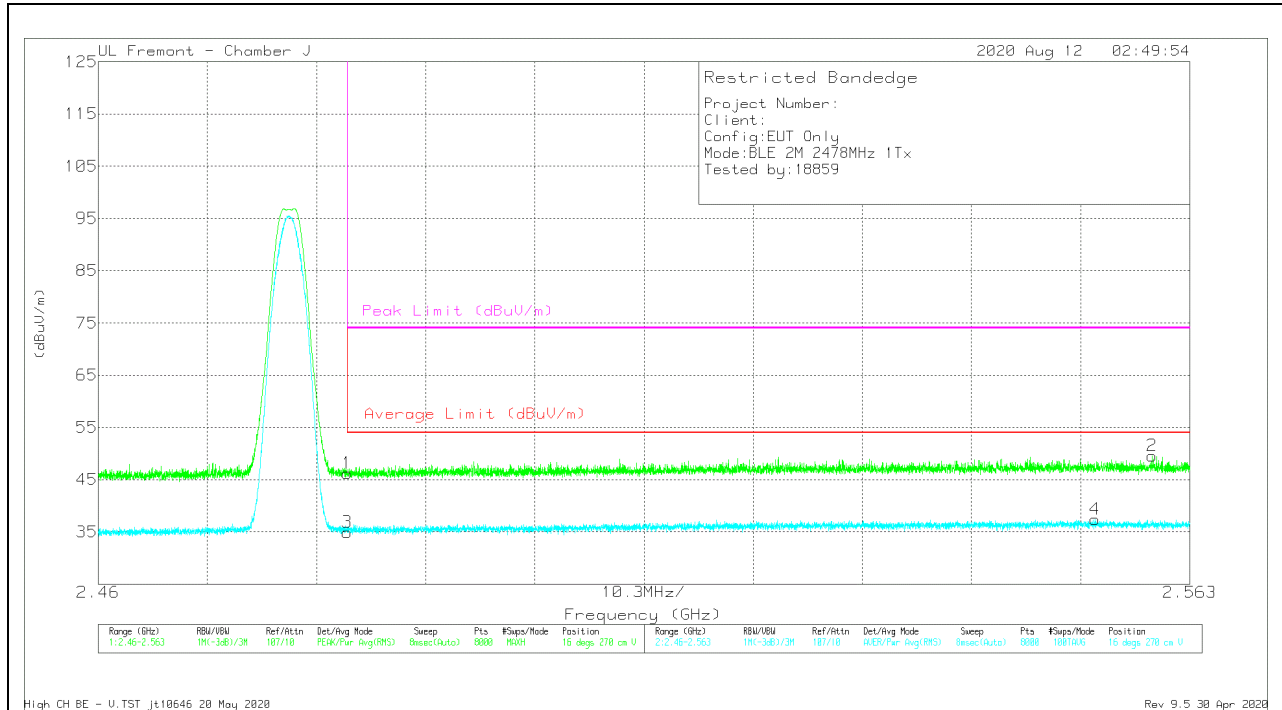


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	31.27	Pk	29.5	-14.6	46.17	-	-	74	-27.83	16	270	V
2	2.55942	34.17	Pk	29.8	-14.4	49.57	-	-	74	-24.43	16	270	V
3	* 2.4835	19.95	RMS	29.5	-14.6	34.85	54	-19.15	-	-	16	270	V
4	2.55407	21.87	RMS	29.9	-14.4	37.37	54	-16.63	-	-	16	270	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.2.8. LOW POWER BLE TXBF (2Mbps)

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

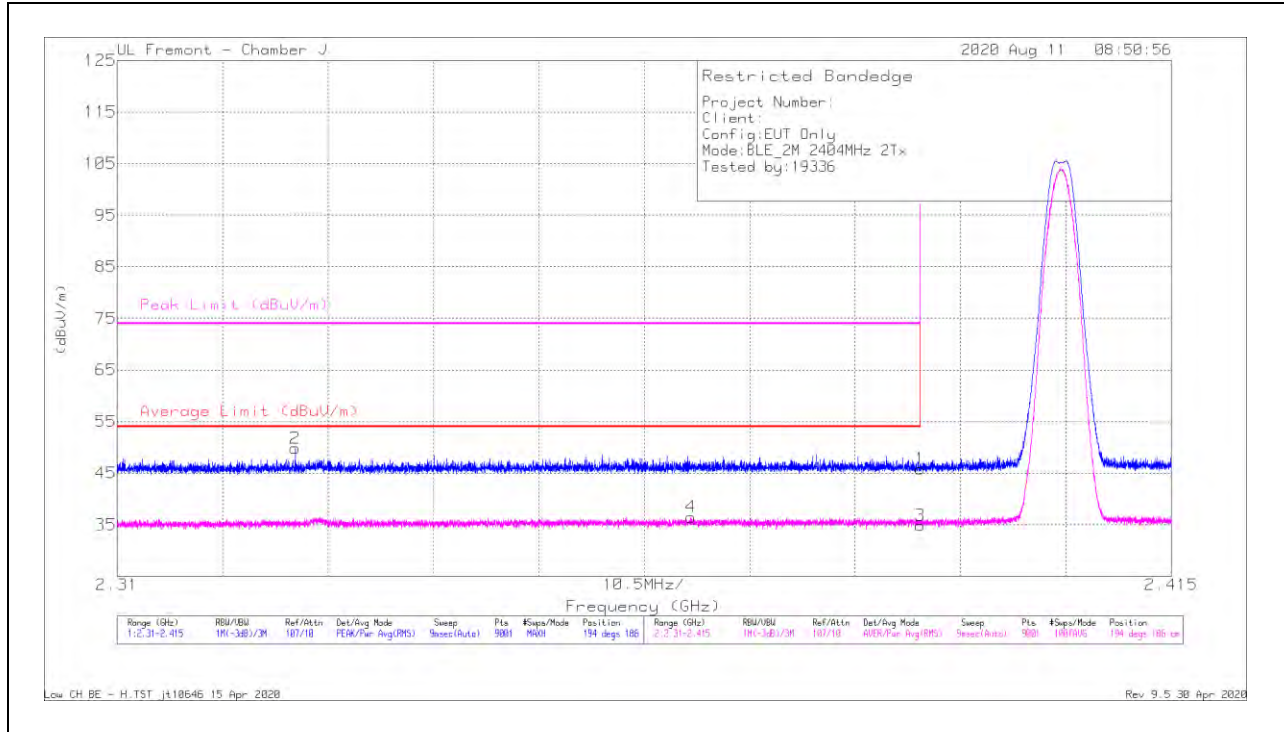

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.32	Pk	29	-25.5	45.82	-	-	74	-28.18	194	186	H
2	* 2.32772	46.53	Pk	28.9	-25.6	49.83	-	-	74	-24.17	194	186	H
3	* 2.38999	31.32	RMS	29	-25.5	34.82	54	-19.18	-	-	194	186	H
4	* 2.36715	32.99	RMS	29	-25.5	36.49	54	-17.51	-	-	194	186	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk – Peak detector  
 RMS – RMS detection

### VERTICAL RESULT

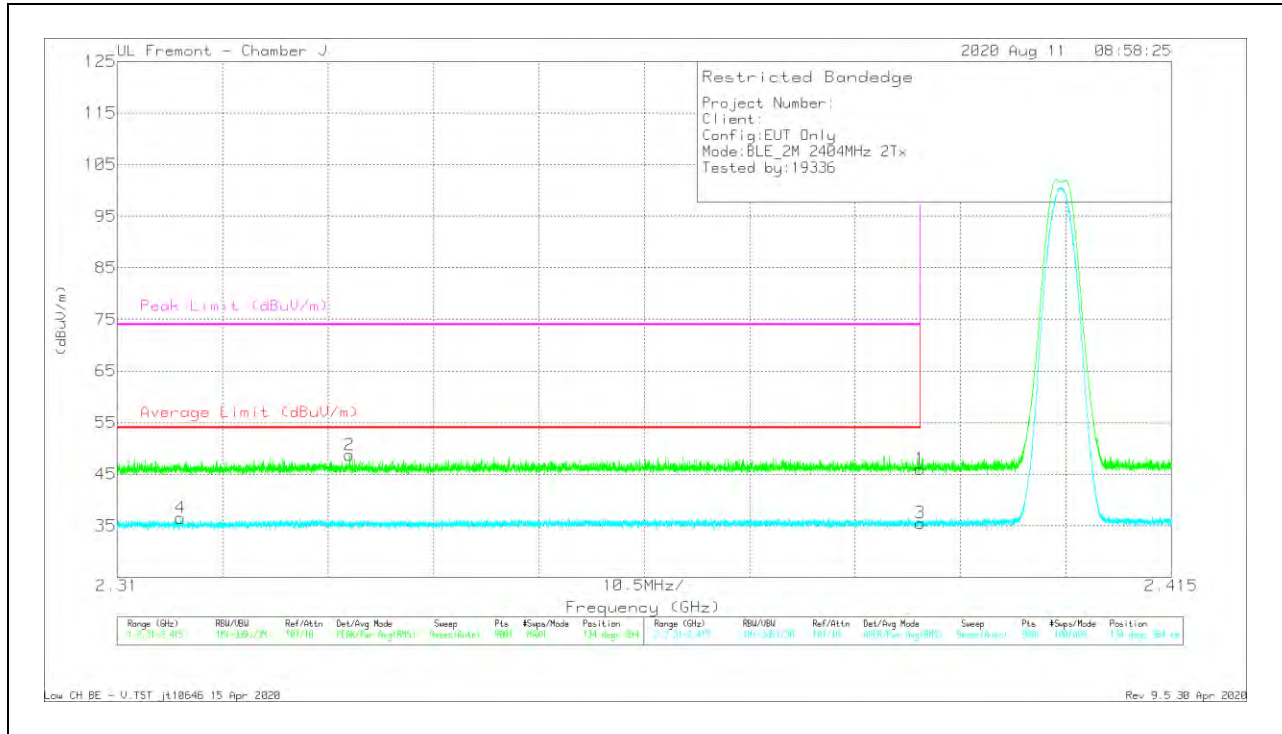


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.46	Pk	29	-25.5	45.96	-	-	74	-28.04	134	384	V
2	* 2.33315	45.4	Pk	28.9	-25.6	48.7	-	-	74	-25.3	134	384	V
3	* 2.38999	32.01	RMS	29	-25.5	35.51	54	-18.49	-	-	134	384	V
4	* 2.3163	33.32	RMS	28.7	-25.5	36.52	54	-17.48	-	-	134	384	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

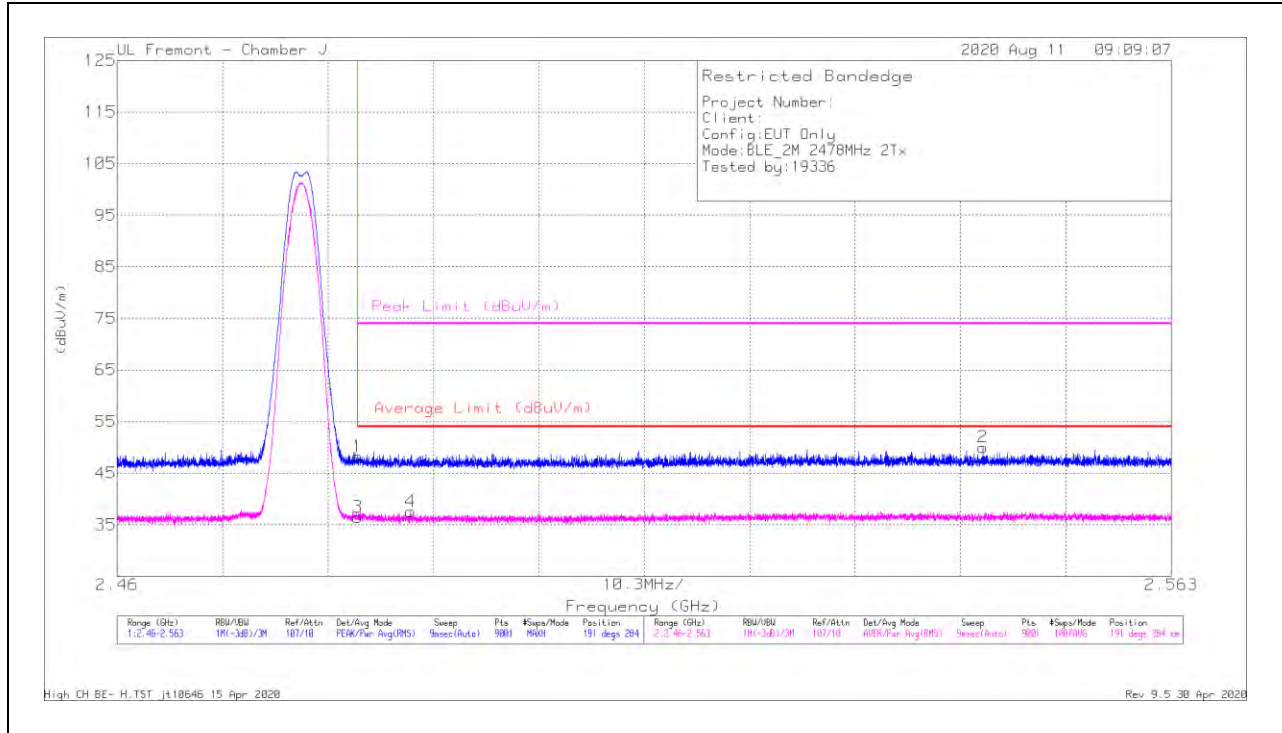


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.22	Pk	29.5	-25.5	48.22	-	-	74	-25.78	191	284	H
2	2.54458	45.61	Pk	29.8	-25.4	50.01	-	-	74	-23.99	191	284	H
3	* 2.48351	32.46	RMS	29.5	-25.5	36.46	54	-17.54	-	-	191	284	H
4	* 2.48867	33.54	RMS	29.5	-25.5	37.54	54	-16.46	-	-	191	284	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT


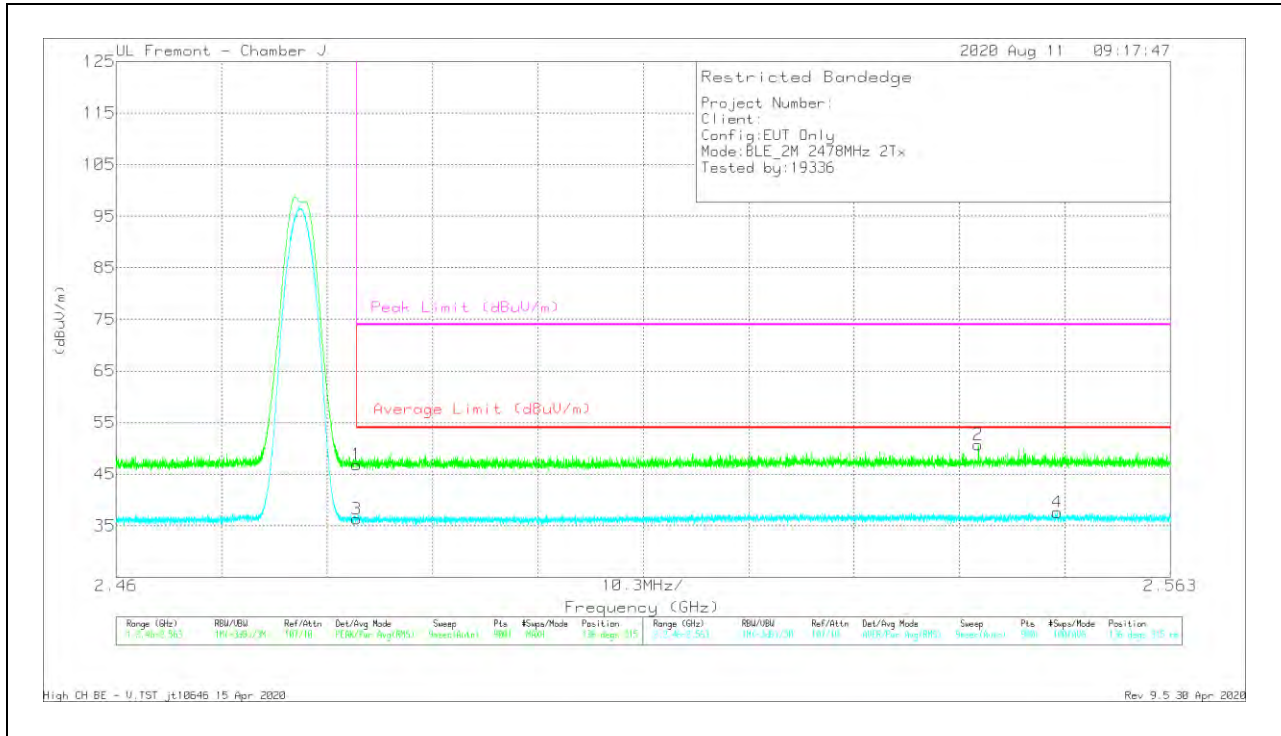


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.85	Pk	29.5	-25.5	46.85	-	-	74	-27.15	136	315	V
2	2.54424	46.31	Pk	29.8	-25.4	50.71	-	-	74	-23.29	136	315	V
3	* 2.48351	32.29	RMS	29.5	-25.5	36.29	54	-17.71	-	-	136	315	V
4	2.55194	33.11	RMS	29.9	-25.4	37.61	54	-16.39	-	-	136	315	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.3. WORST CASE BELOW 1 GHZ

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

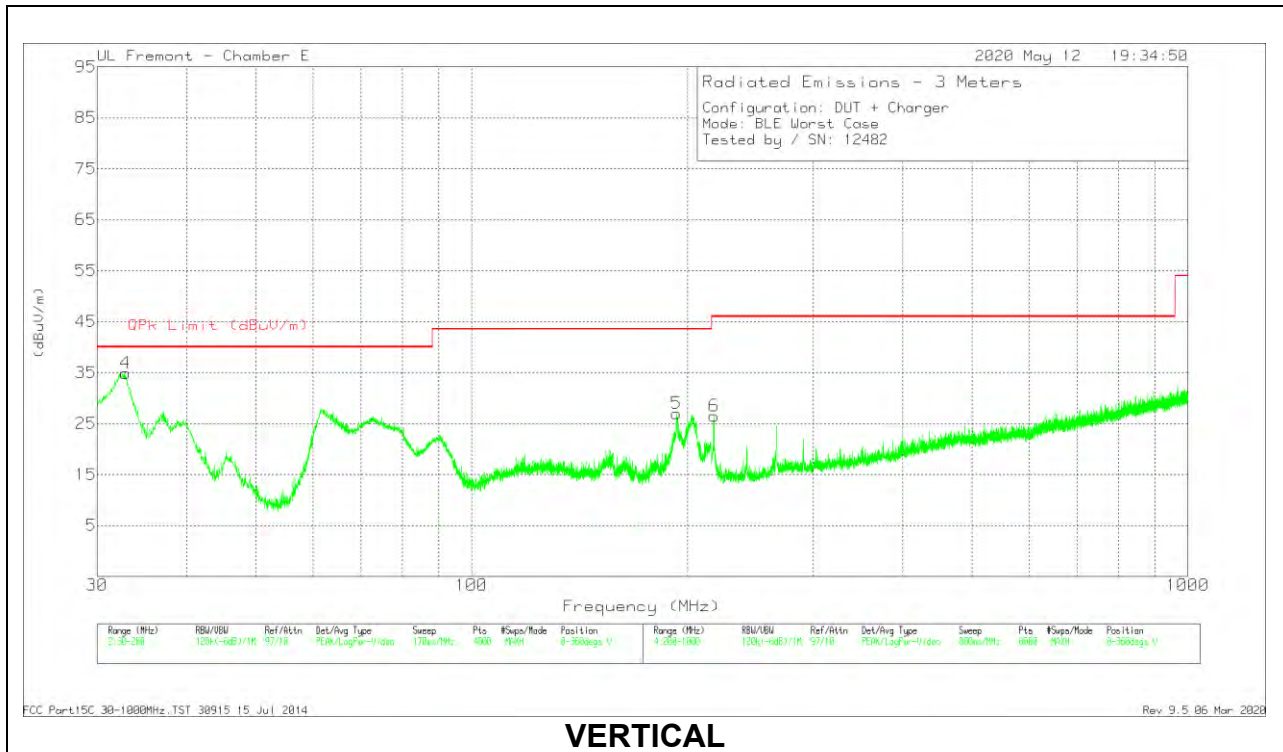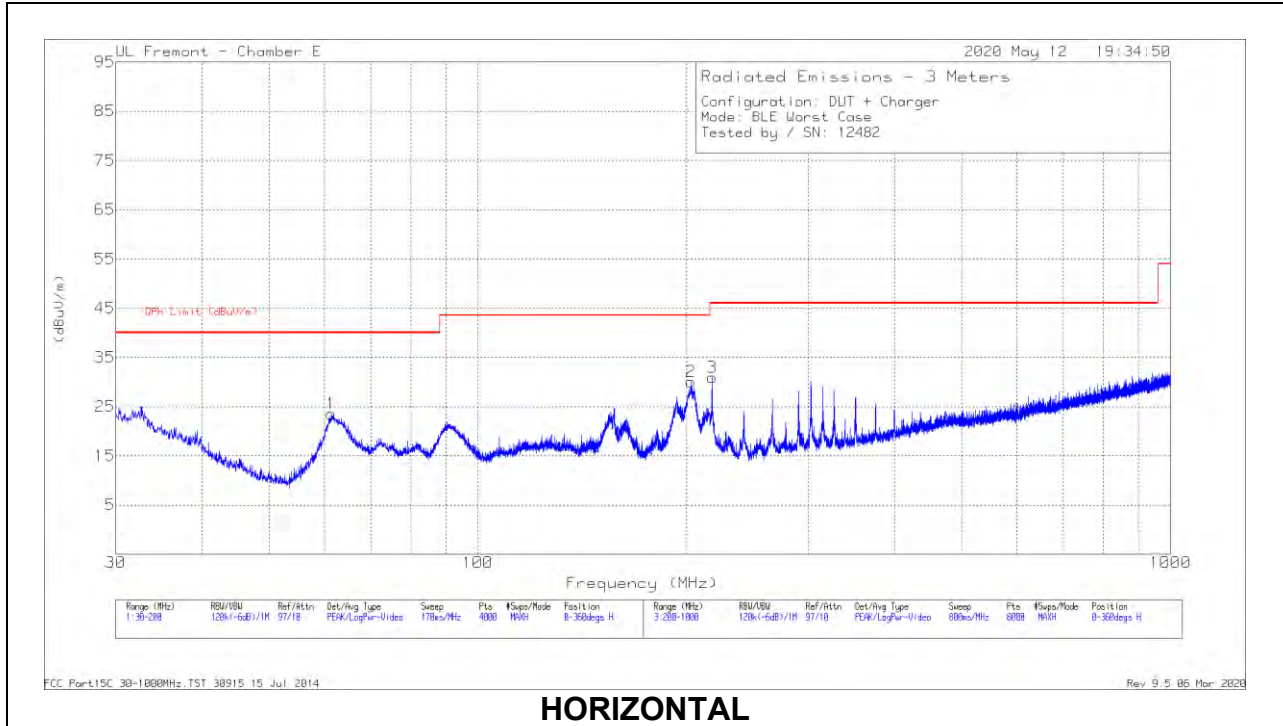

**DATA**



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	32.5274	41.98	Pk	25.1	-31.5	35.58	40	-4.42	297	104	V
4	32.6434	37.81	Qp	25	-31.5	31.31	40	-8.69	297	104	V
1	61.4581	41.33	Pk	13.4	-31.2	23.53	40	-16.47	0-360	301	H
5	193.3698	39.3	Pk	17.7	-30	27	43.52	-16.52	0-360	100	V
2	203.3004	42.82	Pk	17.2	-30	30.02	43.52	-13.5	0-360	99	H
6	217.8023	39.73	Pk	16.5	-29.8	26.43	46.02	-19.59	0-360	99	V
3	217.9023	44.22	Pk	16.5	-29.8	30.92	46.02	-15.1	0-360	99	H

Pk - Peak detector

Qp - Quasi-Peak detector

### 10.4. WORST CASE 18-26 GHz

#### SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

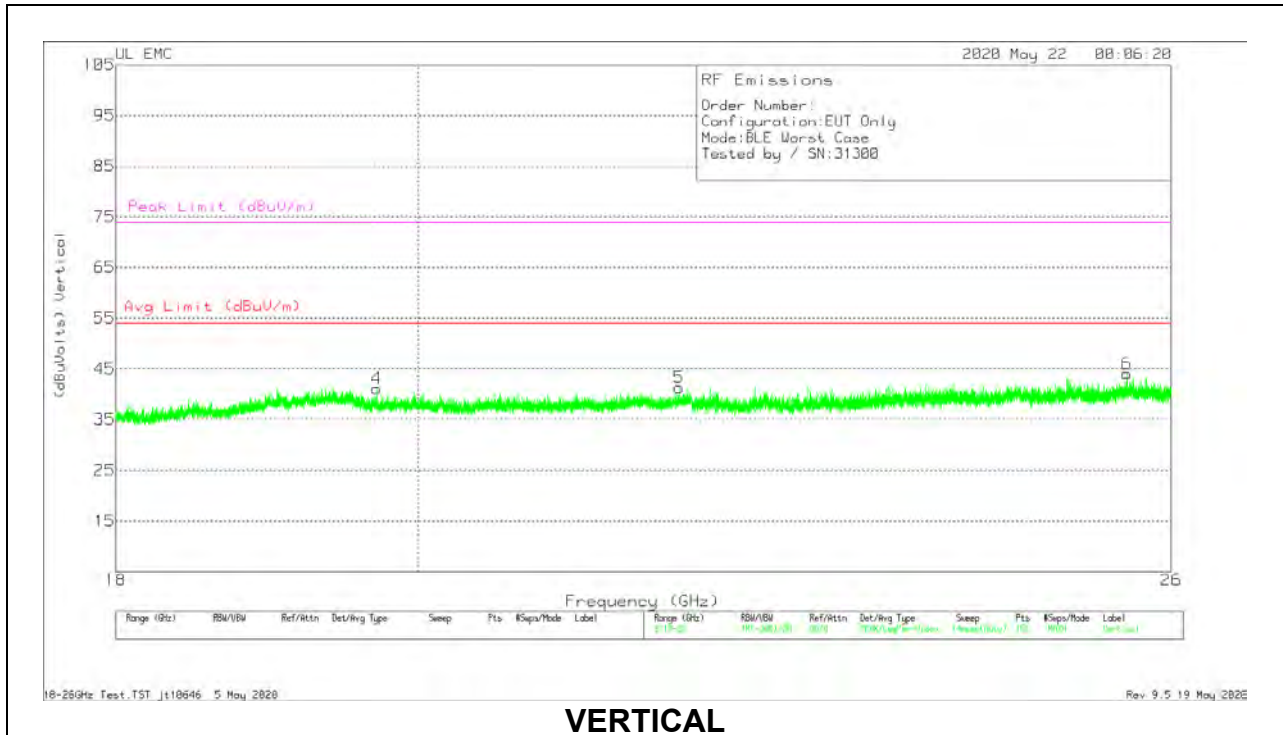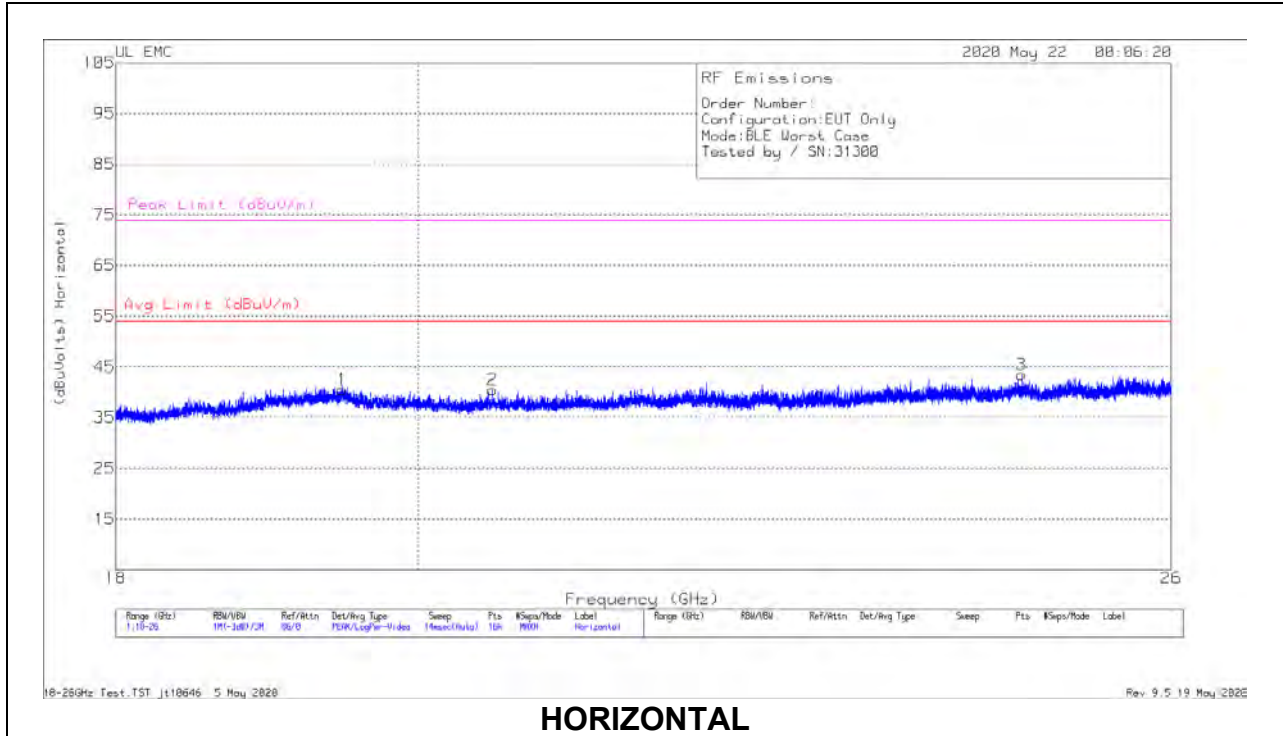



**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T125 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	19.47741	36.22	Pk	32.8	-19	-9.5	40.52	54	-13.48	74	-33.48
2	20.52334	37.97	Pk	33.1	-21.1	-9.5	40.47	54	-13.53	74	-33.53
3	24.67759	37.87	Pk	34.1	-19	-9.5	43.47	54	-10.53	74	-30.53
4	19.71239	38.01	Pk	32.8	-20.2	-9.5	41.11	54	-12.89	74	-32.89
5	21.90176	38.11	Pk	33.4	-20.7	-9.5	41.31	54	-12.69	74	-32.69
6	25.60153	38.96	Pk	34.3	-19.7	-9.5	44.06	54	-9.94	74	-29.94

Pk - Peak detector

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

# 11.1. AC Power Line With Laptop


## LINE 1 RESULTS

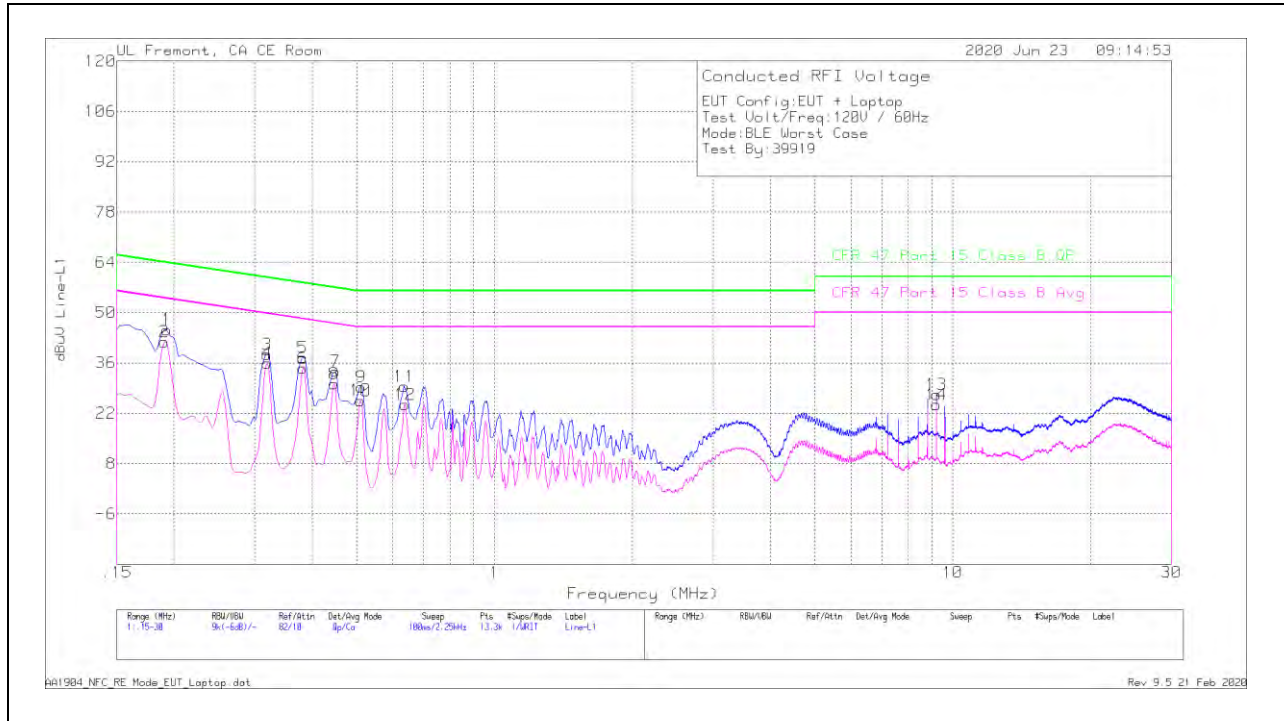

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.19275	35.28	Qp	0	0	10	45.28	63.92	-18.64	-	-
2	.1905	31.89	Ca	0	0	10	41.89	-	-	54.01	-12.12
3	.31875	28.33	Qp	0	0	10	38.33	59.74	-21.41	-	-
4	.31875	26.02	Ca	0	0	10	36.02	-	-	49.74	-13.72
5	.38175	27.56	Qp	0	0	10	37.56	58.24	-20.68	-	-
6	.38175	24.5	Ca	0	0	10	34.5	-	-	48.24	-13.74
7	.44925	23.67	Qp	0	0	10	33.67	56.89	-23.22	-	-
8	.447	20.13	Ca	0	0	10	30.13	-	-	46.93	-16.8
9	.51225	19.3	Qp	0	0	10	29.3	56	-26.7	-	-
10	.51	15.56	Ca	0	0	10	25.56	-	-	46	-20.44
11	.636	19.48	Qp	0	0	10	29.48	56	-26.52	-	-
12	.63825	14.51	Ca	0	0	10	24.51	-	-	46	-21.49
13	9.2085	16.86	Qp	0	.2	10.1	27.16	60	-32.84	-	-
14	9.2085	14.06	Ca	0	.2	10.1	24.36	-	-	50	-25.64

Qp - Quasi-Peak detector  
 Ca - CISPR average detection

### LINE 2 RESULTS

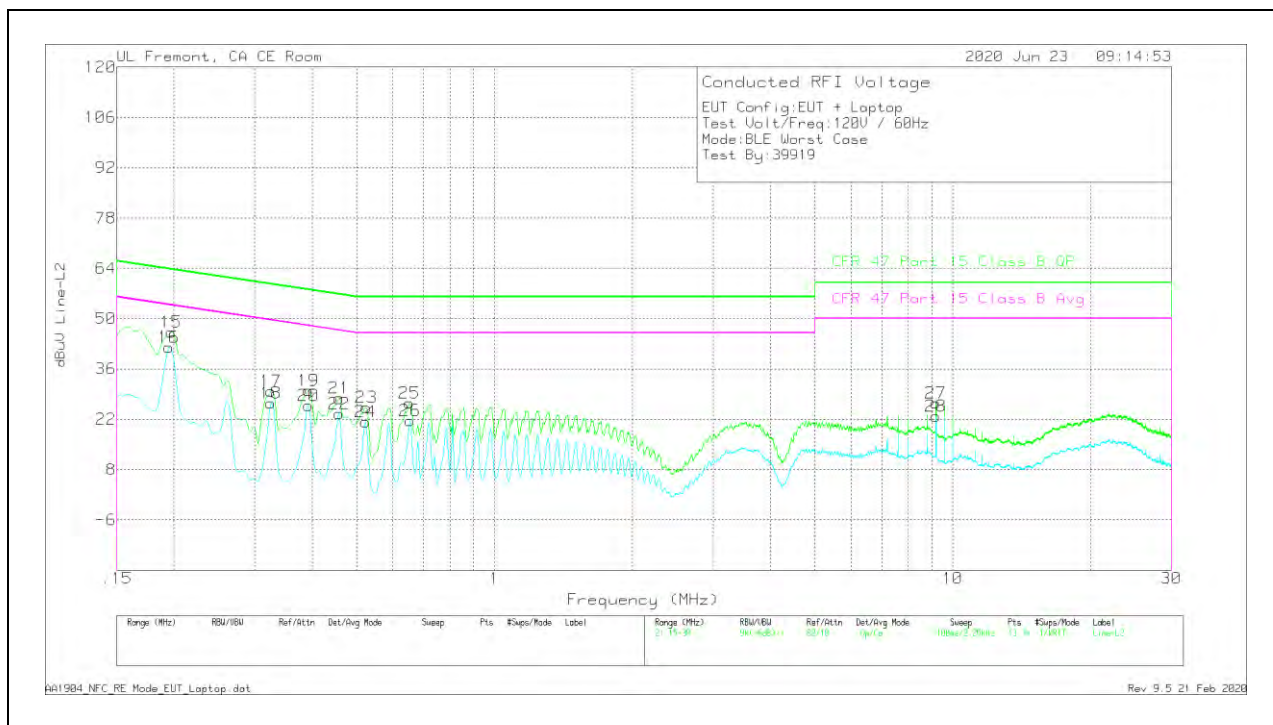


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
15	.19725	36.32	Qp	0	0	10	46.32	63.73	-17.41	-	-
16	.195	32.12	Ca	0	0	10	42.12	-	-	53.82	-11.7
17	.3255	19.88	Qp	0	0	10	29.88	59.57	-29.69	-	-
18	.3255	16.58	Ca	0	0	10	26.58	-	-	49.57	-22.99
19	.393	20.03	Qp	0	0	10	30.03	58	-27.97	-	-
20	.393	15.75	Ca	0	0	10	25.75	-	-	48	-22.25
21	.45825	17.84	Qp	0	0	10	27.84	56.72	-28.88	-	-
22	.45825	13.57	Ca	0	0	10	23.57	-	-	46.72	-23.15
23	.52575	15.26	Qp	0	0	10	25.26	56	-30.74	-	-
24	.5235	11.22	Ca	0	0	10	21.22	-	-	46	-24.78
25	.65175	16.53	Qp	0	0	10	26.53	56	-29.47	-	-
26	.654	11.57	Ca	0	0	10	21.57	-	-	46	-24.43
27	9.195	16.15	Qp	0	.2	10.1	26.45	60	-33.55	-	-
28	9.195	12.55	Ca	0	.2	10.1	22.85	-	-	50	-27.15

Qp - Quasi-Peak detector  
 Ca - CISPR average detection

## 11.2. AC Power Line With AC/DC Adapter

### LINE 1 RESULTS

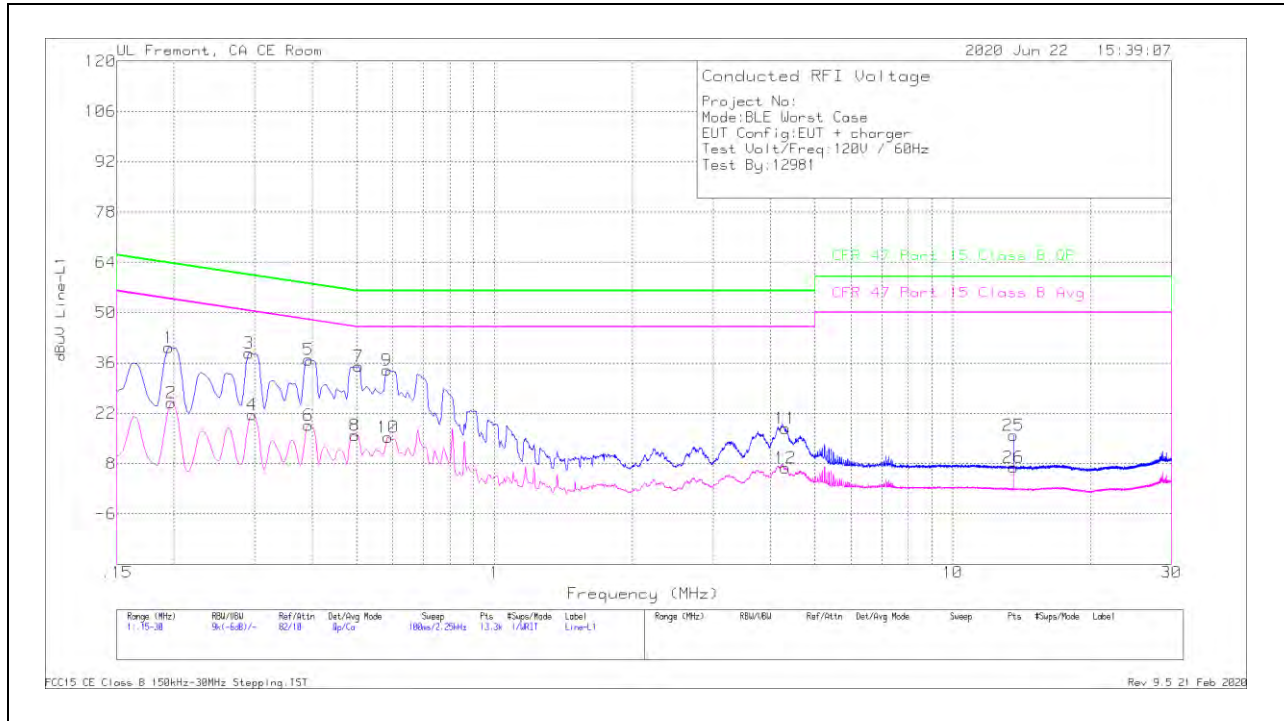


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.195	30.34	Qp	0	0	10	40.34	63.82	-23.48	-	-
2	.19725	14.9	Ca	0	0	10	24.9	-	-	53.73	-28.83
3	.29175	28.75	Qp	0	0	10	38.75	60.47	-21.72	-	-
4	.29625	11.68	Ca	0	0	10	21.68	-	-	50.35	-28.67
5	.393	26.91	Qp	0	0	10	36.91	58	-21.09	-	-
6	.393	8.67	Ca	0	0	10	18.67	-	-	48	-29.33
7	.5055	25.01	Qp	0	0	10	35.01	56	-20.99	-	-
8	.4965	5.9	Ca	0	0	10	15.9	-	-	46.06	-30.16
9	.582	24.1	Qp	0	0	10	34.1	56	-21.9	-	-
10	.5865	5.3	Ca	0	0	10	15.3	-	-	46	-30.7
11	4.317	7.68	Qp	0	.1	10.1	17.88	56	-38.12	-	-
12	4.317	-3.42	Ca	0	.1	10.1	6.78	-	-	46	-39.22
*25	13.56	5.42	Qp	.1	.2	10.1	15.82	60	-44.18	-	-
*26	13.56	-3.38	Ca	.1	.2	10.1	7.02	-	-	50	-42.98

Qp - Quasi-Peak detector  
 Ca - CISPR average detection

\*Indicates UL RFID signal. Not from device.

### LINE 2 RESULTS

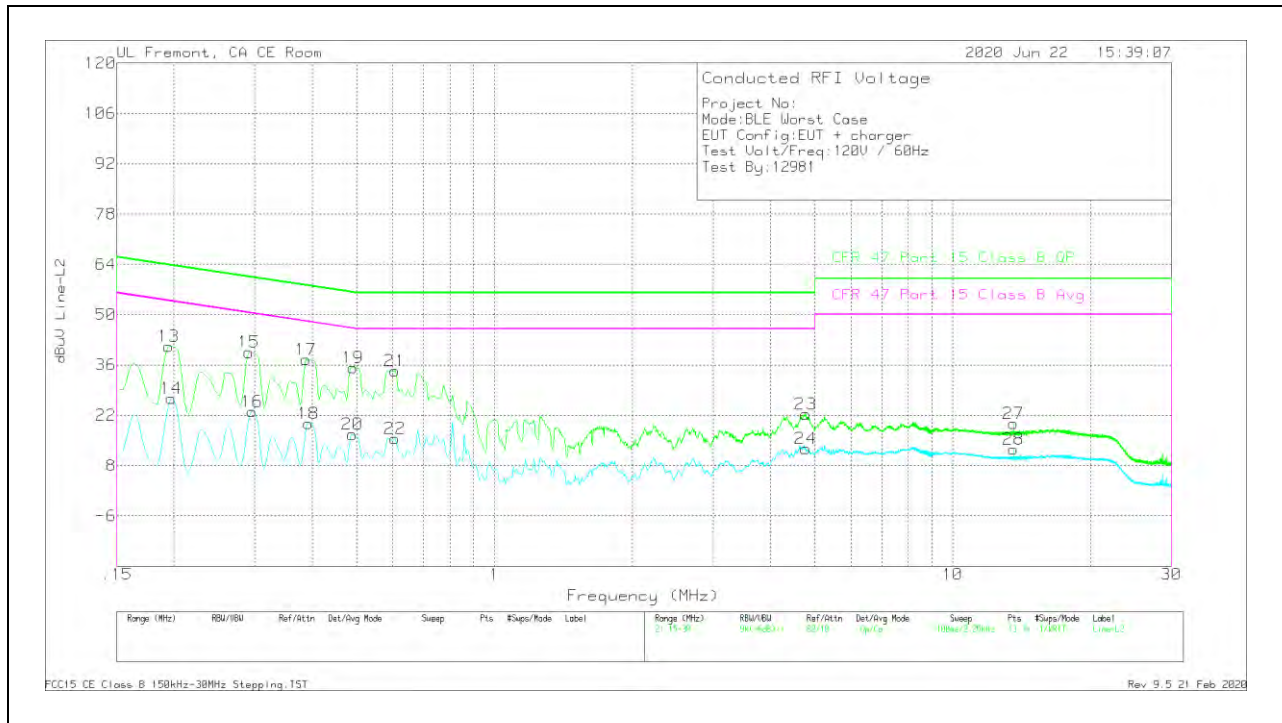

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.195	31.24	Qp	0	0	10	41.24	63.82	-22.58	-	-
14	.19725	16.62	Ca	0	0	10	26.62	-	-	53.73	-27.11
15	.29175	29.53	Qp	0	0	10	39.53	60.47	-20.94	-	-
16	.29625	13.05	Ca	0	0	10	23.05	-	-	50.35	-27.3
17	.3885	27.49	Qp	0	0	10	37.49	58.1	-20.61	-	-
18	.393	9.75	Ca	0	0	10	19.75	-	-	48	-28.25
19	.492	25.27	Qp	0	0	10	35.27	56.13	-20.86	-	-
20	.48975	6.67	Ca	0	0	10	16.67	-	-	46.17	-29.5
21	.60675	24.42	Qp	0	0	10	34.42	56	-21.58	-	-
22	.60675	5.51	Ca	0	0	10	15.51	-	-	46	-30.49
23	4.77825	12.09	Qp	0	.1	10.1	22.29	56	-33.71	-	-
24	4.77825	2.61	Ca	0	.1	10.1	12.81	-	-	46	-33.19
*27	13.56	9.34	Qp	.1	.2	10.1	19.74	60	-40.26	-	-
*28	13.56	2.12	Ca	.1	.2	10.1	12.52	-	-	50	-37.48

Qp - Quasi-Peak detector  
 Ca - CISPR average detection

\*Indicates UL RFID signal. Not from device.

## 12. SETUP PHOTOS

Please refer to 13335182-EP1V1 for setup photos

**END OF TEST REPORT**