



CERTIFICATION TEST REPORT

Report Number. : 13389132-E13V1

Applicant : APPLE, INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2411, A2412, A2413

FCC ID : BCG-E3550A

IC : 579C-E3550A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-216 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 21, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	9/21/2020	Initial Issue	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. INTRODUCTION OF TEST DATA REUSE.....	7
5.1. EUT DESCRIPTION	7
5.2. INTRODUCTION	7
5.3. DIFFERENCE IN MODEL NUMBER.....	7
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY	7
5.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz 8	
5.4.2. IC / CISPR 11 TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz	9
5.4.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	10
5.4.4. IC / CISPR 11 TX SPURIOUS EMISSION 30 TO 1000 MHz	12
5.5. REFERENCE DETAIL	14
5.6. WORST-CASE CONFIGURATION AND MODE.....	14
5.7. DESCRIPTION OF TEST SETUP.....	15
6. TEST AND MEASUREMENT EQUIPMENT	16
7. SETUP PHOTOS.....	16
Appendix A – Reference Test Report	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014,

EUT DESCRIPTION: Smartphone

MODEL: A2411, A2412, A2413

SERIAL NUMBER: (Original): G6TD402A06PQ
(Spot Check): G6TD401806R1

DATE TESTED: AUGUST 10, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-216 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Prepared By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Francisco Guarnero
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, and FCC CFR 47 Part 15, RSS-GEN Issue 5 and RSS-216 Issue 2 January 2016.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street ISED Site Code:	47266 Benicia Street ISED Site Code:	47658 Kato Rd ISED Site Code:
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☐ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
	☒ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement).

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. INTRODUCTION OF TEST DATA REUSE

5.1. EUT DESCRIPTION

EUT is a The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID BCG-E3548A, IC: 579C-E3548A to cover variant model BCG-E3550A, 579C-E3550A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. DIFFERENCE IN MODEL NUMBER

Models A2411, A2412, and A2413 are electrically identical and the model numbers are allocated for marketing and logistic purposes only. Model A2411 was used for the spot check testing described in this report.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device model A2411, FCC ID: BCG-E3550A, IC: 579C-E3550A for radiated spurious and radiated band-edge in accordance with the Test Plan that was approved via KDB inquiry.


Item	Frequency	Original model		Spot check model		Delta (dB)	
		A2342		A2411, A2412, A2413			
		BCG-E3548A, 579C-E3548A		BCG-E3550A, 579C-E3550A			
		FCC	IC	FCC	dBuA/m		
Fund	360kHz	-15.29 dBuV/m	10.37 dBuA/m	-16.39 dBuV/m	12.71 dBuA/m	-1.1	2.34
RSE	297.6MHz	33.1 dBuV/m	28.42 dBuV/m	29.3 dBuV/m	28.72 dBuV/m	-3.8	0.3

Comparison of the models, upper deviation is within 3dB range and all tests are under FCC Technical Limits. The test report for FCC ID BCG-E3548A, IC: 579C-E3548A is therefore being used to support the application for certification for FCC ID: BCG-E3550A, IC: 579C-E3550A.

SPOT CHECK DATA

5.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

OPERATING WITH LOAD

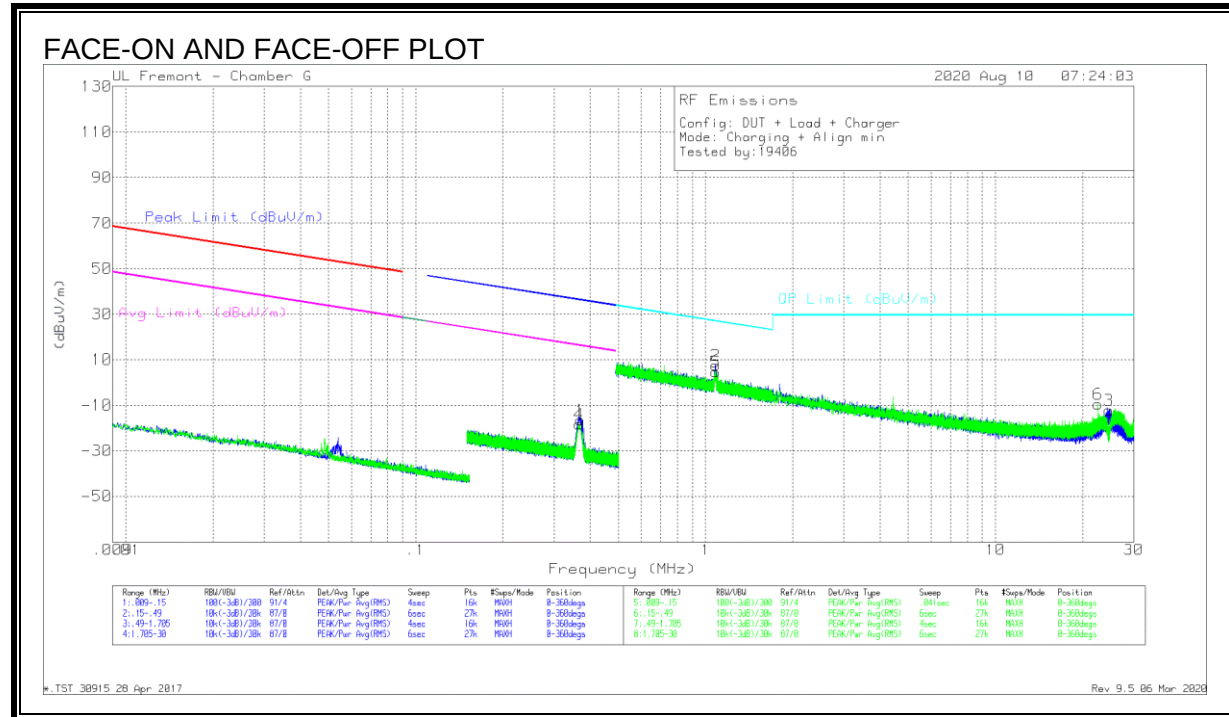

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
4	.36629	50.69	Pk	10.8	.1	-80	-18.41	36.33	-54.74	16.33	-34.74	326
1	.36954	52.71	Pk	10.8	.1	-80	-16.39	36.26	-52.65	16.26	-32.65	70


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr 30m	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
2	1.08174	36.32	Pk	11.2	.1	-40	7.62	26.94	-19.32	170
5	1.08326	33.47	Pk	11.2	.1	-40	4.77	26.93	-22.16	62
6	22.5602	20.17	Pk	9.7	.7	-40	-9.43	29.5	-38.93	288
3	24.61638	17.62	Pk	9.3	.8	-40	-12.28	29.5	-41.78	98

Pk - Peak detector

*.TST 30915 28 Apr 2017
Rev 9.5 06 Mar 2020

5.4.2. IC / CISPR 11 TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

OPERATING WITH LOAD

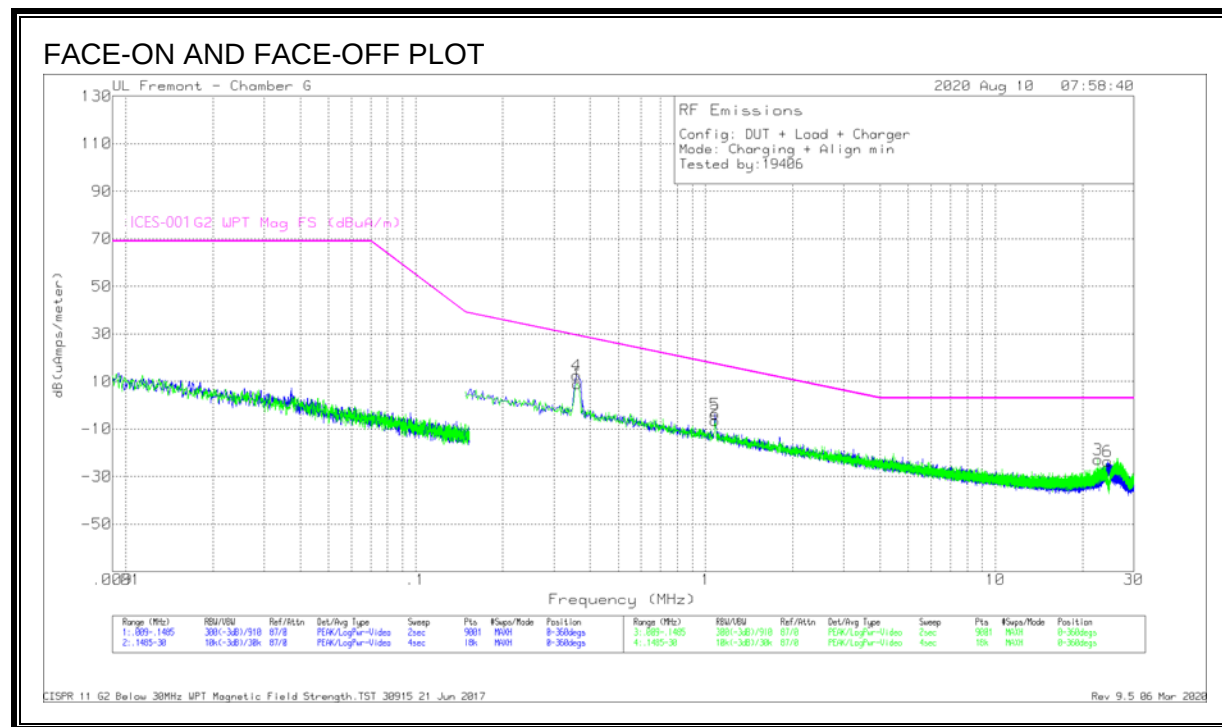



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Corrected Reading dB(uAmps/meter)	CISPR11 G2 WPT Mag FS (dBuA/m)	Margin (dB)	Azimuth (Degs)
4	.35993	49.62	Qp	-40.6	.1	9.12	29.32	-20.2	341
1	.36035	53.21	Qp	-40.6	.1	12.71	29.31	-16.6	64
5	1.07962	34.27	Qp	-40.2	.1	-5.83	17.32	-23.15	238
2	1.07969	31.4	Qp	-40.2	.1	-8.7	17.32	-26.02	354
3	22.5612	11.51	Qp	-41.8	.7	-29.59	3	-32.59	133
6	24.3845	9.49	Qp	-42.1	.7	-31.91	3	-34.91	120

Qp - Quasi-Peak detector

5.4.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz

OPERATING WITH LOAD

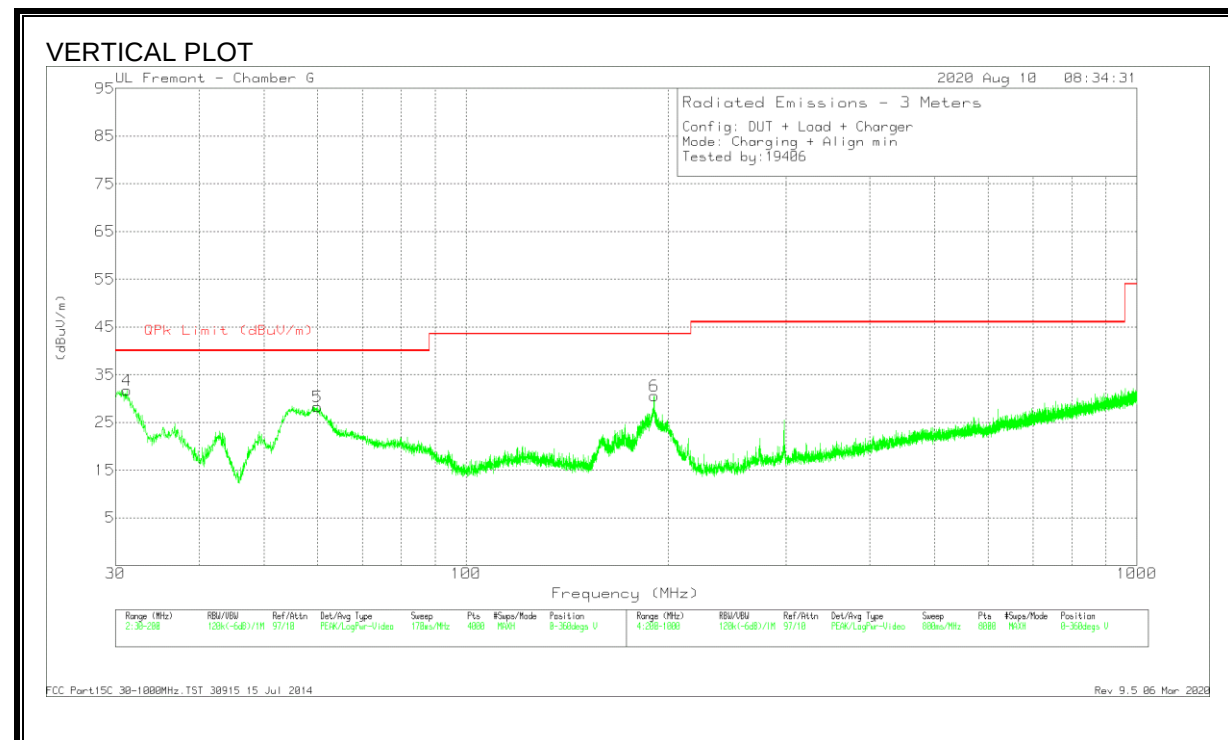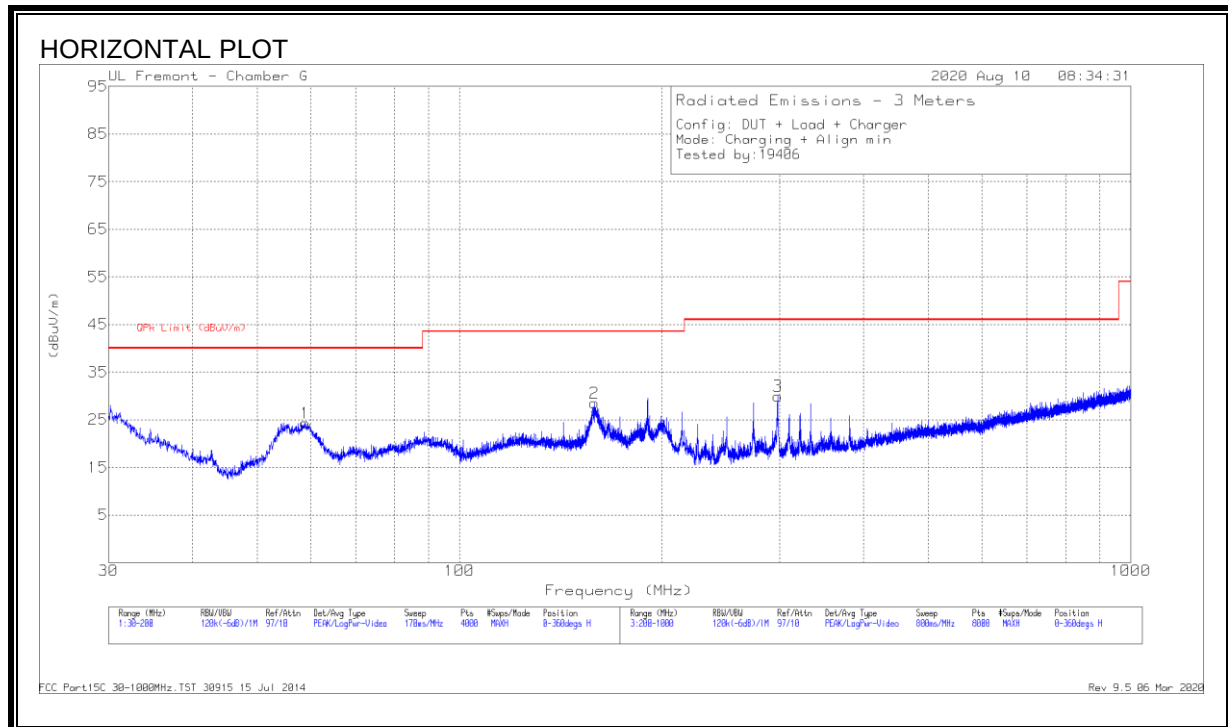



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	31.1509	30.03	Qp	26.6	-31	25.63	40	-14.37	20	100	V
1	58.8458	38.01	Qp	13.4	-30.7	20.71	40	-19.29	200	228	H
5	59.9185	41.94	Qp	13.5	-30.7	24.74	40	-15.26	157	100	V
2	158.8776	35.27	Qp	18.3	-29.8	23.77	43.52	-19.75	258	146	H
6	190.5624	40.08	Qp	17.4	-29.5	27.98	43.52	-15.54	191	105	V
3	297.713	38.9	Qp	19.4	-29	29.3	46.02	-16.72	335	113	H

Qp - Quasi-Peak detector

5.4.4. IC / CISPR 11 TX SPURIOUS EMISSION 30 TO 1000 MHz

OPERATING WITH LOAD

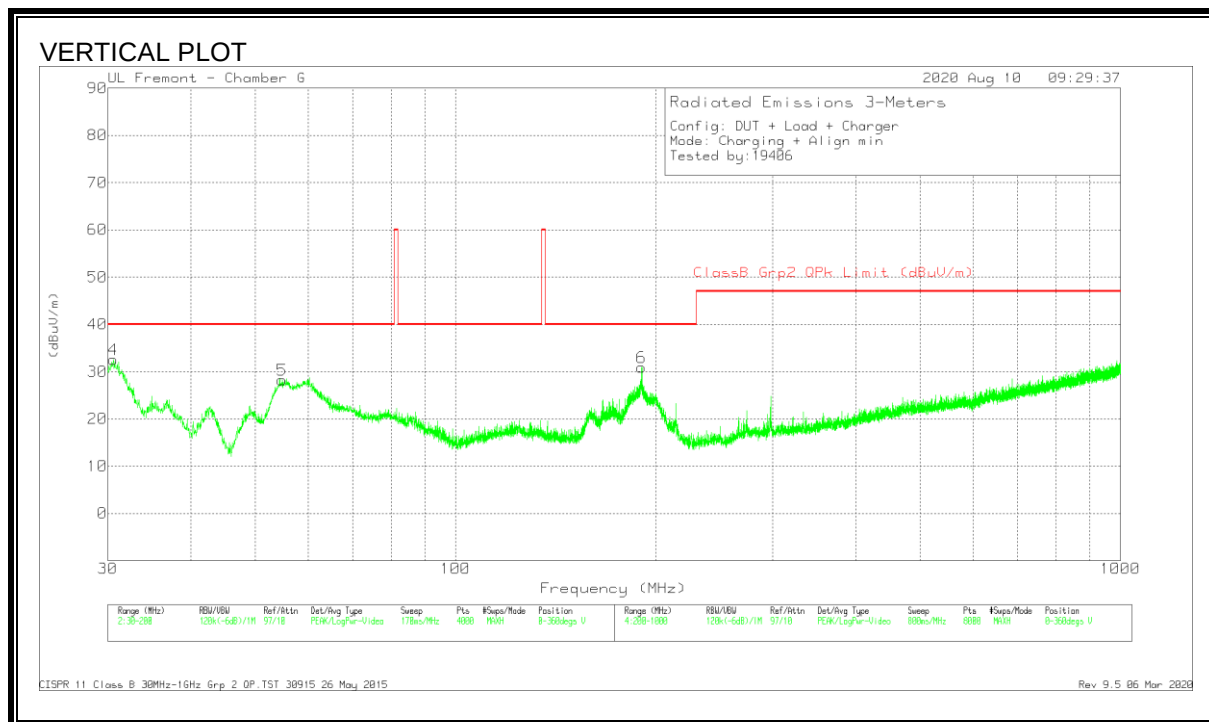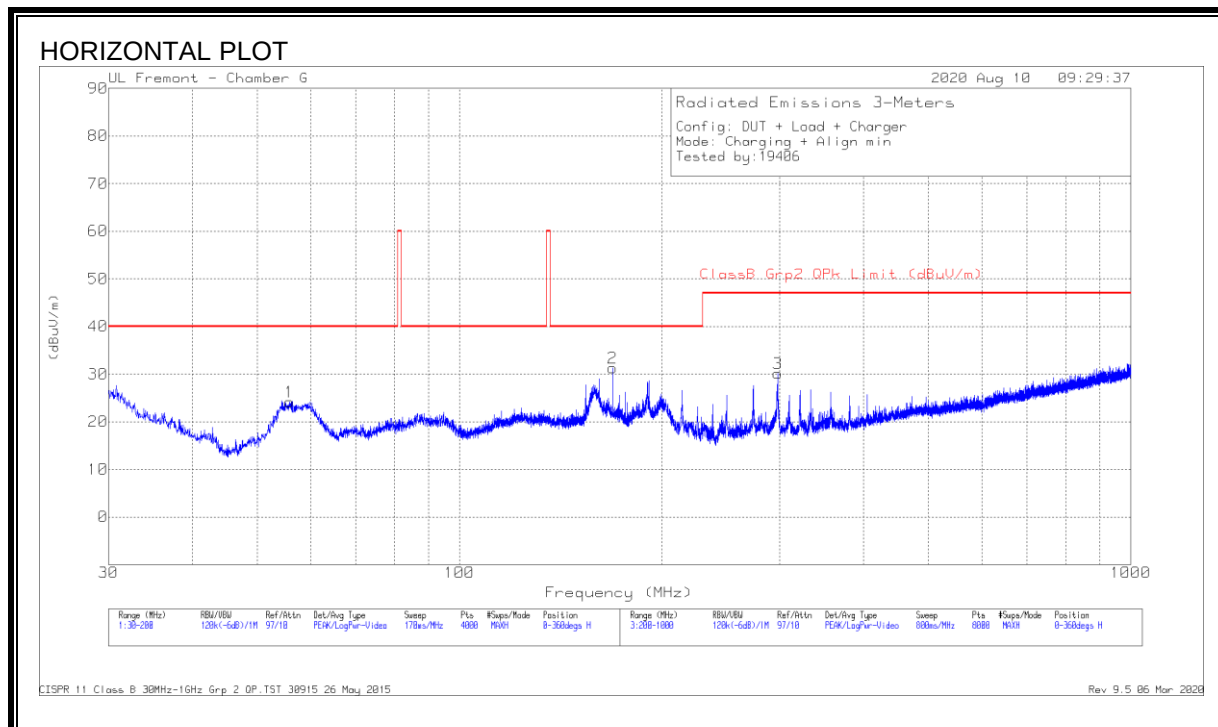

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	ClassB Grp2 QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	30.3371	30.7	Qp	27.1	-31	26.8	40	-13.2	233	104	V
5	54.8955	42.34	Qp	13.2	-30.7	24.84	40	-15.16	126	109	V
1	55.6218	36.87	Qp	13.2	-30.7	19.37	40	-20.63	193	294	H
2	169.0516	30.8	Qp	17.9	-29.7	19	40	-21	91	308	H
6	190.5957	39.52	Qp	17.4	-29.5	27.42	40	-12.58	20	109	V
3	297.8103	38.32	Qp	19.4	-29	28.72	47	-18.28	143	103	H

Qp - Quasi-Peak detector

5.5. REFERENCE DETAIL

Reference application that contains the reference data which is attached to this report in Appendix A.

Equipment Class	Reference FCC ID & IC	Reference Report	Report Title/Section
DCD	BCG-E3548A 579C-E3548A	13335182-E13	FCC IC_WPT Report / All sections

5.6. WORST-CASE CONFIGURATION AND MODE

The EUT is a smartphone which connected to the AC/DC adapter via USB-C cable, and the inductive charging coil to charge WPT accessories. For the entire radiated emissions test, the EUT was performed based on the worst case on model A2342

Mode	Descriptions
Operating	EUT and Load powered by AC/DC adapter

For below 30MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 300 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS


SUPPORT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A2305	N/A	N/A
WPT Accessory	Apple	N/A	N/A	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	USBC	Un-shielded	2	5W Power Supply

TEST SETUP

OPERATING MODE PHONE WITH LOAD

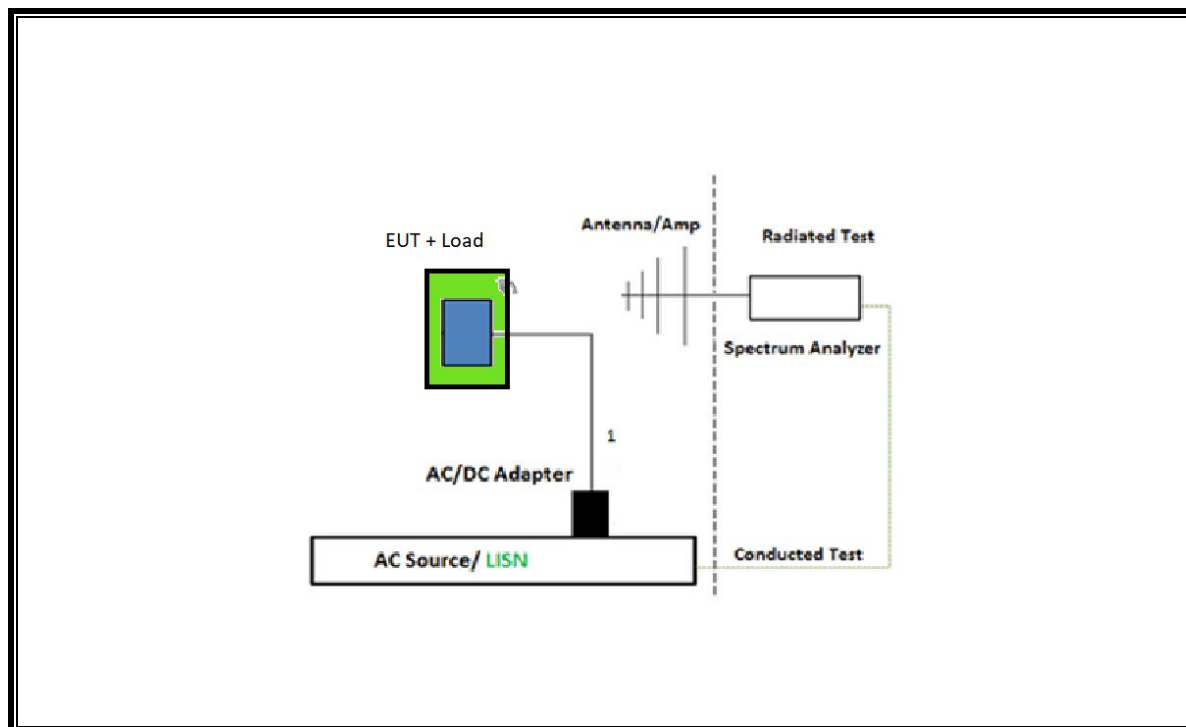

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T1616	10/28/2020	10/28/2019
*Antenna, Broadband Hybrid, 30MHz to 2000MHz w/4dB	Sunol Sciences Crop.	JB3	T477	09/04/2020	09/04/2019
Amplifier, 10kHz to 1GHz, 32dB	Sonoma Instrument	310N	T834	07/14/2021	07/14/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A-544	T1113	03/02/2021	03/02/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	01/23/2021	01/23/2020

UL AUTOMATION SOFTWARE			
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020

*Testing is completed before equipment expiration date.

7. SETUP PHOTOS

Please refer to 13335182-EP1 for setup photos

END OF TEST REPORT

Appendix A – Reference Test Report

Attached is the test report (13335182-E13) containing the reference data from the parent model as detailed in section 5.5.



CERTIFICATION TEST REPORT

Report Number. : 13335182-E13V3

Applicant : APPLE, INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2342

FCC ID : BCG-E3548A

IC : 579C-E3548A

EUT Description : Smartphone

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-216 ISSUE 2

Date of Issue:
September 30, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	9/21/2020	Initial Issue	Chin Pang
V2	9/25/2020	Address TCB's Questions	Chin Pang
V3	9/30/2020	Address TCB's Questions	Vien Tran

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM E-FIELD and H-FIELD	7
5.3. WORST-CASE CONFIGURATION AND MODE.....	7
5.4. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. OCCUPIED BANDWIDTH	10
8. RADIATED EMISSION TEST RESULTS.....	11
8.1. LIMITS AND PROCEDURE	11
8.2. EUT With Load	12
8.2.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz	12
8.2.2. IC / CISPR 11 TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz	13
8.2.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	14
8.2.4. IC / CISPR 11 TX SPURIOUS EMISSION 30 TO 1000 MHz	16
9. AC POWER LINE CONDUCTED EMISSIONS.....	18
9.1. EUT With Load	19
9.1.1. OPERATING MODE WITH LOAD POWERED BY AC/DC ADAPTER.....	19
9.1.2. OPERATING MODE WITH LOAD POWERED BY HOST LAPTOP VIA USB CABLE	21
10. SETUP PHOTOS	23

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014,

EUT DESCRIPTION: SMARTPHONE

MODEL: A2342

SERIAL NUMBER: G6TCQ00QQ897

DATE TESTED: AUGUST 09 -11, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-216 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Joe Vang
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, and FCC CFR 47 Part 15, RSS-GEN Issue 5 and RSS-216 Issue 2 January 2016.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street ISED Site Code:	47266 Benicia Street ISED Site Code:	47658 Kato Rd ISED Site Code:
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☐ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
	☒ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement).

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

5.2. MAXIMUM E-FIELD and H-FIELD

The transmitter has maximum radiated electric and H-field strength as follows:

Fundamental Frequency (KHz)	Mode	E field (300m distance) FCC (dBuV/m)	H field (3m distance) IC (dBuA/m)
360	Operating	-15.29	10.37

5.3. WORST-CASE CONFIGURATION AND MODE

The EUT is a smartphone which connected to the AC/DC adapter via USB-C cable, and the inductive charging coil to charge WPT accessories. For the entire radiated emissions test, the EUT was investigated on the following configuration during the test: 1. At its natural orientation with EUT set at center location, 2. EUT offset 2mm left and right, 3. EUT with 2mm spacer to find out the worst case location. And the worst case was at 2mm offset to the right and 3mm spacer.

Mode	Descriptions
Operating	EUT and Load powered by AC/DC adapter

For below 30MHz & 1GHz tests EUT was connected to AC power adapter as the worst case, For AC line conducted emission, test was investigated with AC power adapter.

The EUT was tested as operation modes. During operational mode, EUT was tested with Phone and load.

For below 30MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 300 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS


SUPPORT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A2305	N/A	N/A
Phone	Apple	A2095	D92YT005MWC4	BCG-A2095
WPT Accessory	Apple	N/A	N/A	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	USBC	Un-shielded	2	5W Power Supply

TEST SETUP

OPERATING MODE PHONE WITH LOAD

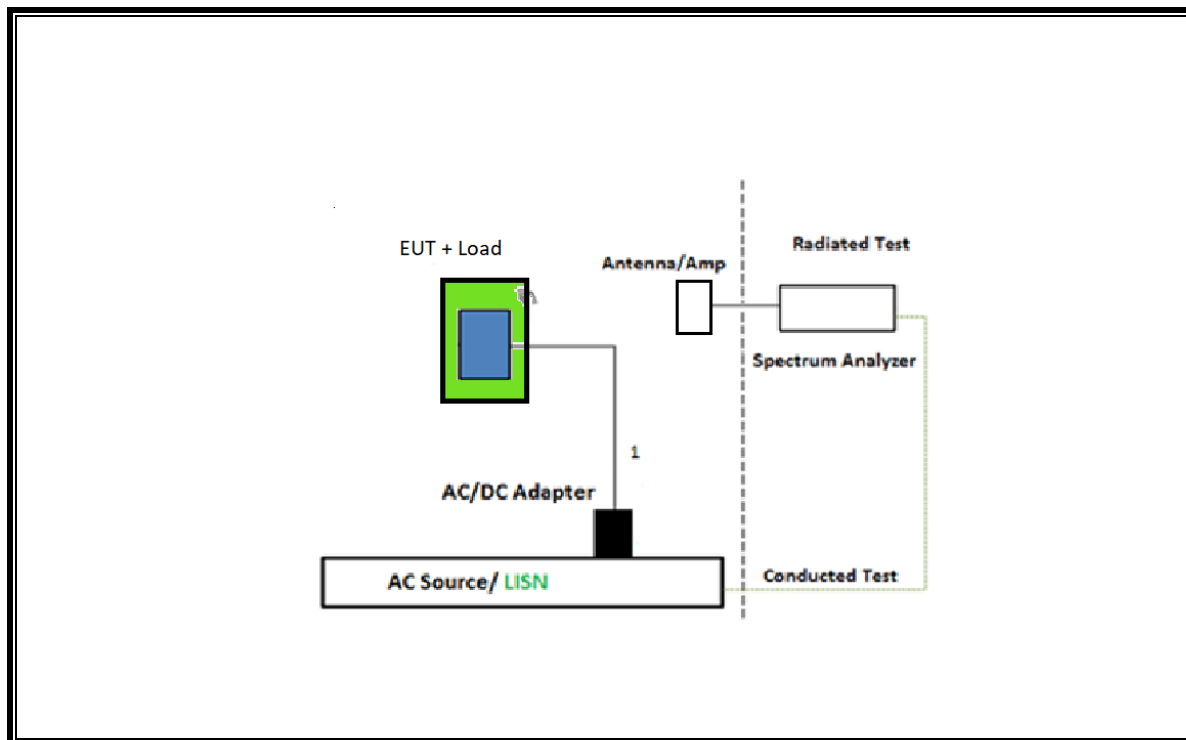

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T1616	10/28/2020	10/28/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz w/4dB	Sunol Sciences Crop.	JB3	T477	09/04/2020	09/04/2019
Amplifier, 10kHz to 1GHz, 32dB	Sonoma Instrument	310N	T834	07/14/2021	07/14/2020
Sniffer Probes	Electro Metrics	EM-6992	N/A	NA	NA
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A-544	T1113	03/02/2021	03/02/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	01/23/2021	01/23/2020

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	T1436	02/20/2021	02/20/2020
Power Cable, Line Conducted Emissions	UL	PR1	T861	10/27/2020	10/27/2019
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01	PRE0186446	01/23/2021	01/23/2020
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020		
Conducted Software	UL	UL EMC	2020.2.26		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, February 21, 2020		


7. OCCUPIED BANDWIDTH

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 300Hz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

RESULTS

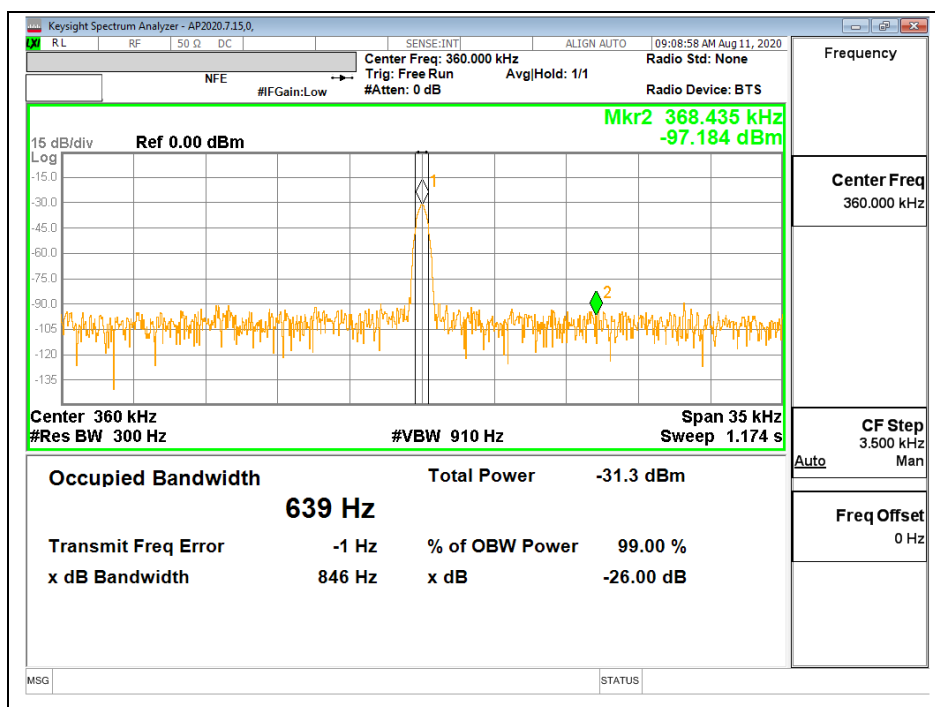

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.209 (a)

ICES-001 Section 3.3.4, IC RSS-216 6.2.2, and IC RSS-GEN Sections 8.9 and 8.10.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

ICES-001 Issue 5 Table 2 & Table 4:

Table 2: Magnetic field strength radiated emission limits for induction cooking appliances

Frequency range (MHz)	Quasi-peak, at 3 m distance (dBμA/m)
0.009 – 0.07	69
0.07 – 0.15	69 to 39 *
0.15 – 30	39 to 7 *
* The limit level in dBμA/m decreases linearly with the logarithm of frequency.	

Table 4: Electric field strength radiated emission limits for induction cooking appliances


Frequency range (MHz)	OATS or SAC * 10 m measurement distance Quasi-peak (dBμV/m)	OATS or SAC * 3 m measurement distance Quasi-peak (dBμV/m)	FAR * 3 m measurement distance Quasi-peak (dBμV/m)
30 – 230	30	40	42 to 35**
230 – 1000	37	47	42
Note: The more stringent limit applies at the transition frequency. * OATS = open-area test site, SAC = semi-anechoic chamber, FAR = fully-anechoic room (see CSA CISPR 11:19). ** The limit level in dBμV/m decreases linearly with the logarithm of frequency.			

RESULTS

8.2. EUT With Load

8.2.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

OPERATING WITH LOAD

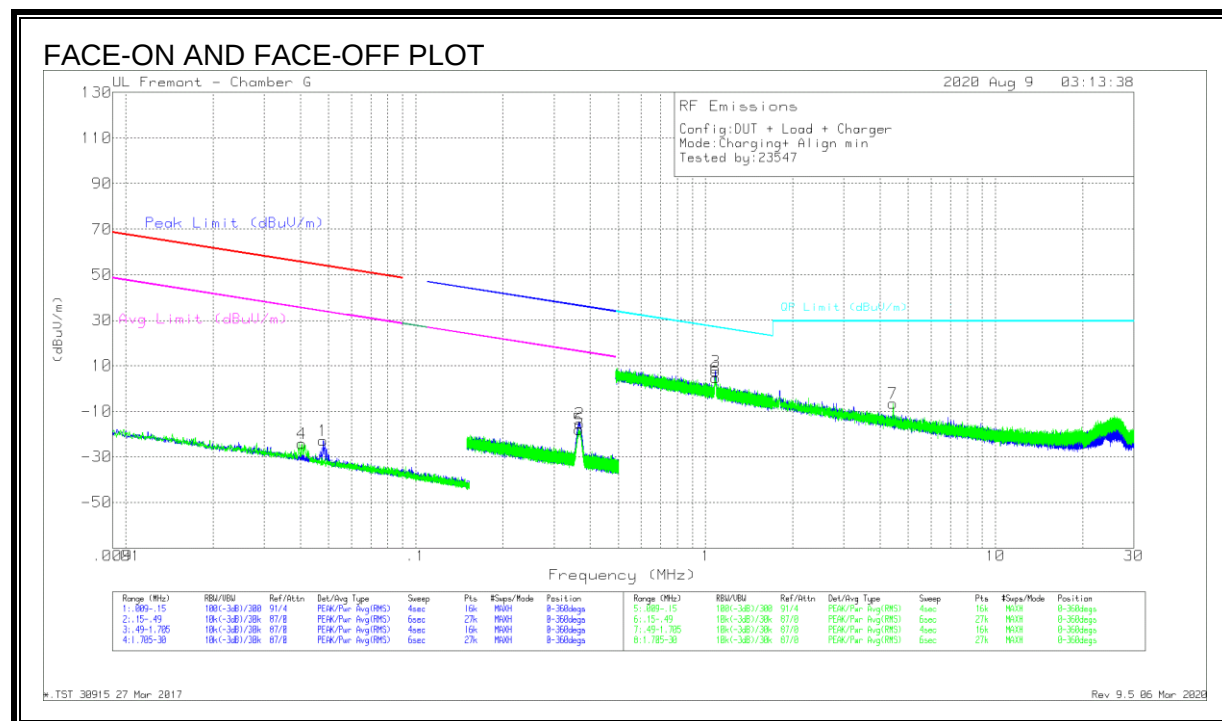

DATA

Radiated Emission


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
4	.04042	42.14	Pk	13.5	.1	-80	-24.26	55.45	-79.71	161
1	.04797	44.08	Pk	12.9	.1	-80	-22.92	53.97	-76.89	122
5	.36696	50.91	Pk	11.1	.1	-80	-17.89	36.31	-51.6	70
2	.36723	53.51	Pk	11.1	.1	-80	-15.29	36.31	-51.6	145

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr 30m	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	1.08036	36.6	PK	10.8	.1	-40	7.5	26.95	-23.84	149
6	1.08081	33.86	PK	10.8	.1	-40	4.76	26.95	-21.02	74
7	4.43156	22.25	PK	10.8	.3	-40	-6.65	29.5	-44.57	72

Qp - Quasi-Peak detector

8.2.2. IC / CISPR 11 TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

OPERATING WITH LOAD

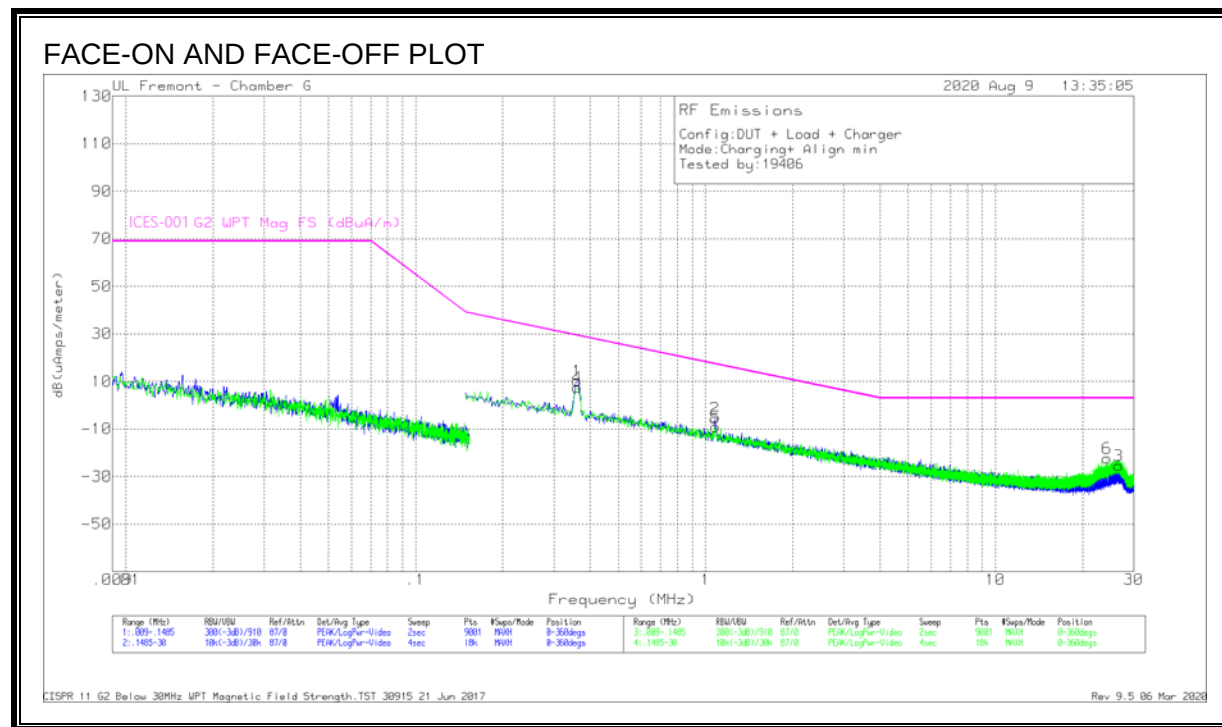

DATA



Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Corrected Reading dB(uAmps/meter)	CISPR11 G2 WPT Mag FS (dBuA/m)	Margin (dB)	Azimuth (Degs)
1	.35928	50.87	PK	-40.6	.1	10.37	29.3	-18.93	82
4	.36006	47.99	PK	-40.6	.1	7.49	29.3	-21.81	163
2	1.07918	34.51	PK	-40.2	.1	-5.59	17.34	-22.93	238
5	1.0799	31.09	PK	-40.2	.1	-9.01	17.29	-26.3	172
6	24.2338	18.88	PK	-42	.7	-22.42	3	-25.42	132
3	26.5918	16.42	PK	-42.5	.8	-25.28	3	-28.28	59

Qp - Quasi-Peak detector

8.2.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz

OPERATING WITH LOAD

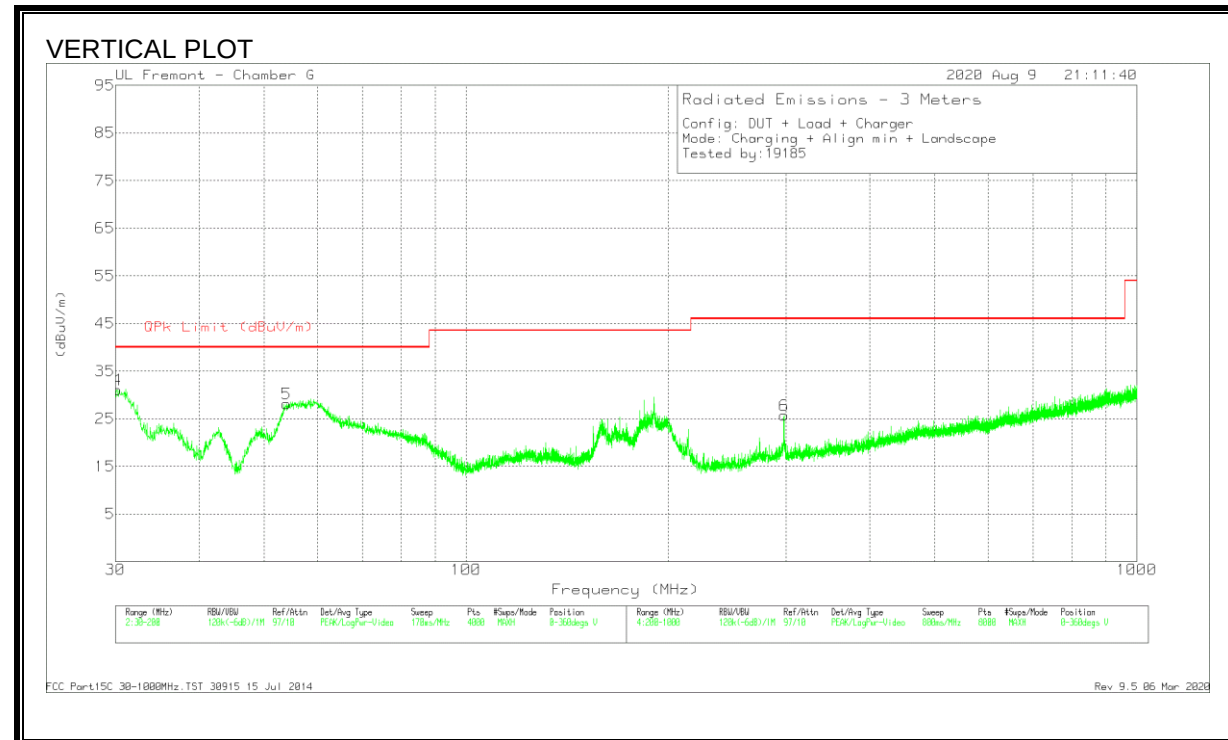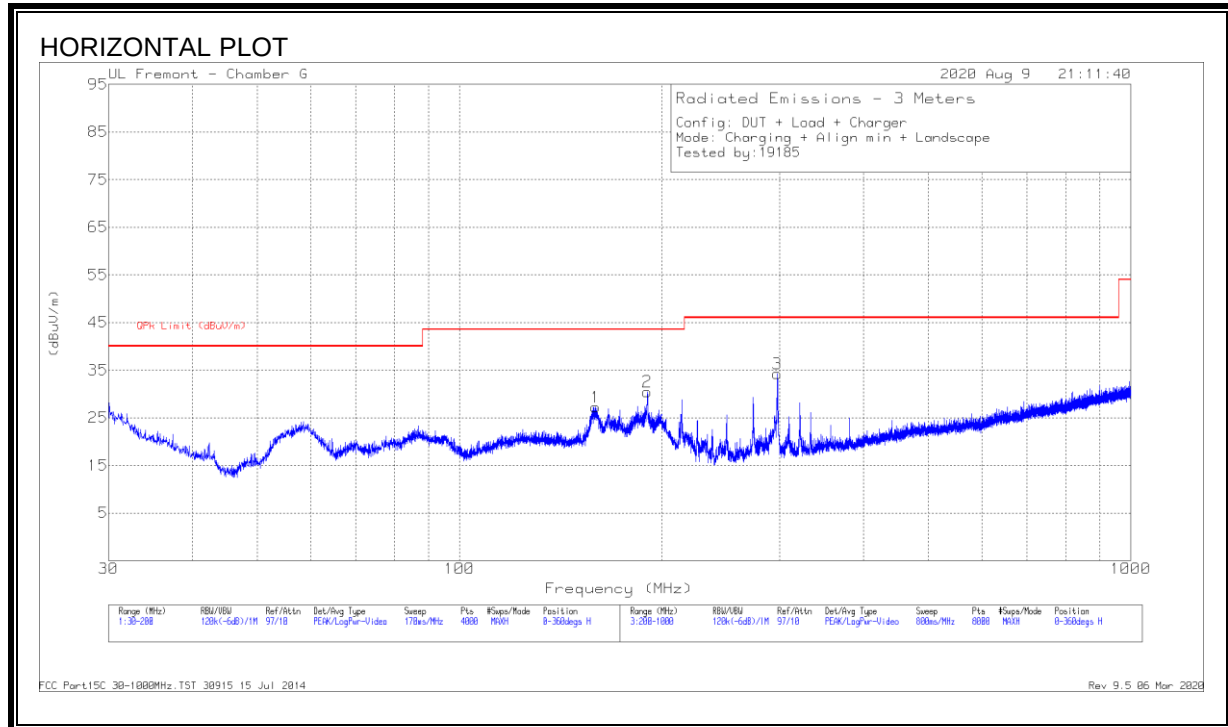

DATA



Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	30.408	29.76	Qp	27.1	-31	25.86	40	-14.14	265	132	V
5	54.2256	41.66	Qp	13.2	-30.7	24.16	40	-15.84	115	136	V
1	159.5043	35.01	Qp	18.2	-29.8	23.41	43.52	-20.11	250	189	H
2	190.4485	39.46	Qp	17.3	-29.5	27.26	43.52	-16.26	145	155	H
3	297.6242	42.7	Qp	19.4	-29	33.1	46.02	-12.92	193	106	H
6	297.6762	33.44	Qp	19.4	-29	23.84	46.02	-22.18	126	100	V

Qp - Quasi-Peak detector

8.2.4. IC / CISPR 11 TX SPURIOUS EMISSION 30 TO 1000 MHz

OPERATING WITH LOAD

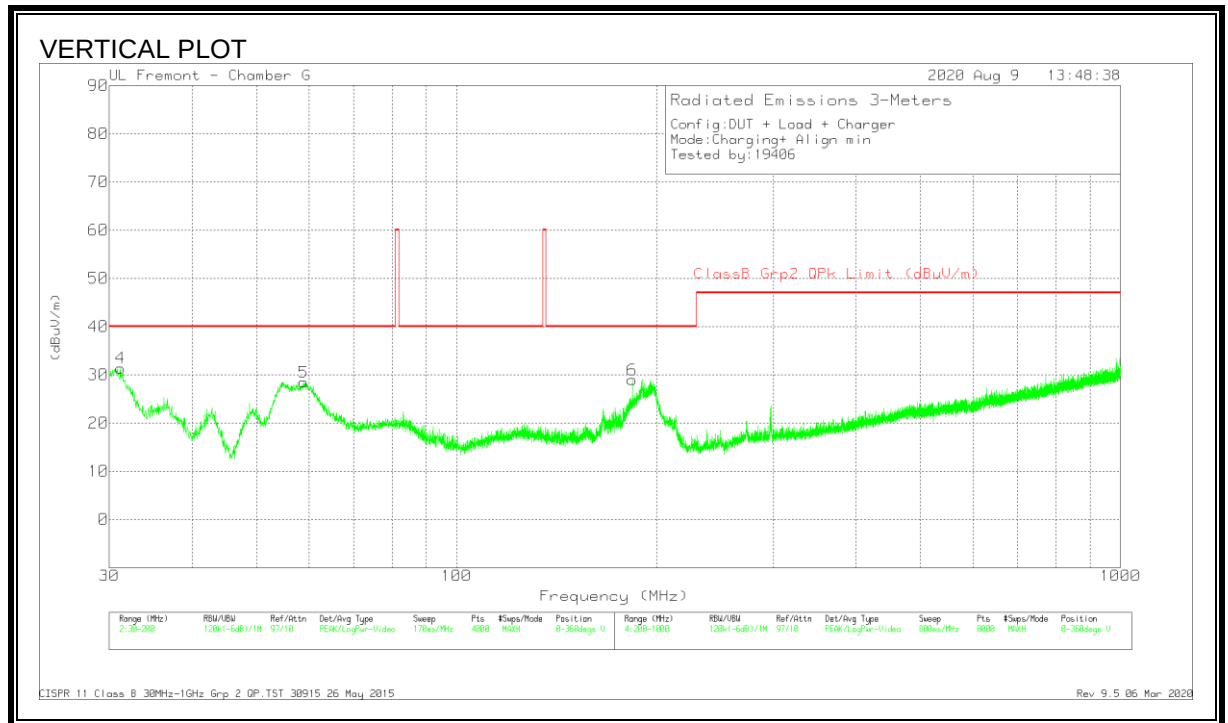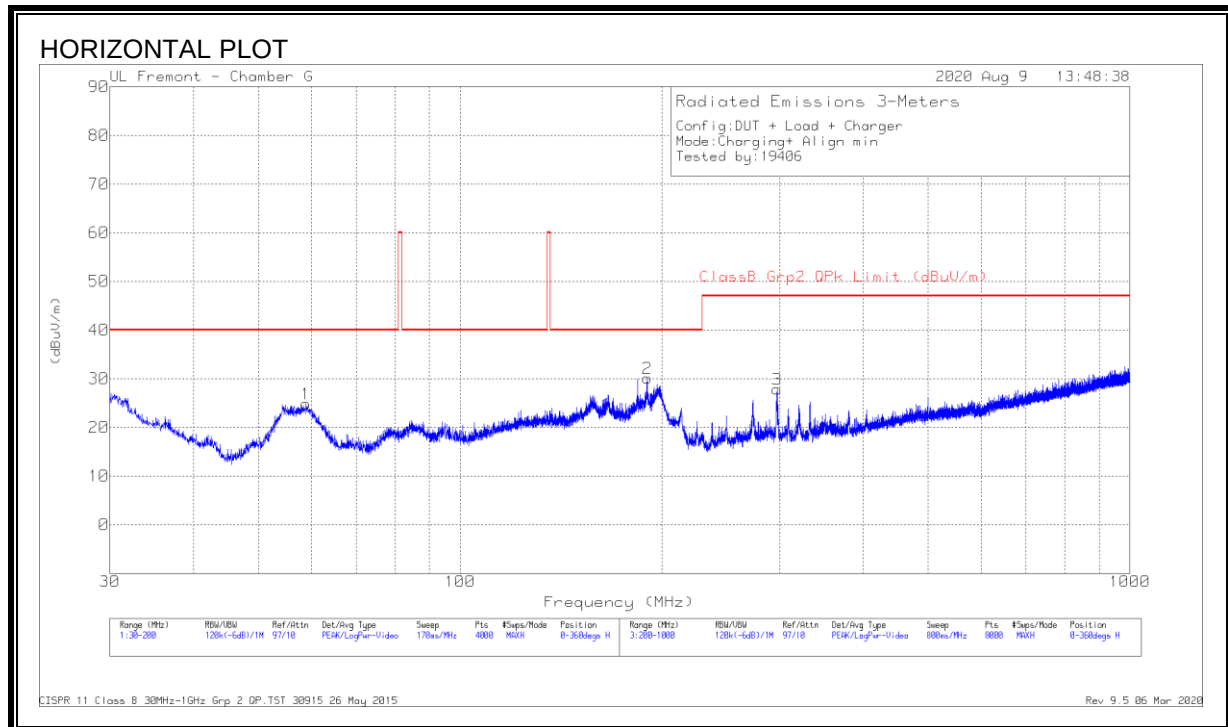

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	ClassB Grp2 QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	31.0482	29.97	Qp	26.7	-31	25.67	40	-14.33	186	115	V
1	58.8566	38.29	Qp	13.4	-30.7	20.99	40	-19.01	177	358	H
5	58.9157	42.22	Qp	13.4	-30.7	24.92	40	-15.08	132	107	V
6	184.1796	29.98	Qp	17.2	-29.6	17.58	40	-22.42	42	209	V
2	190.4717	38.39	Qp	17.3	-29.5	26.19	40	-13.81	145	134	H
3	297.5581	38.02	Qp	19.4	-29	28.42	47	-18.58	201	108	H

Qp - Quasi-Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

ICES-001 Issue 5 Table 1:

Table 1: Conducted emission limits for induction cooking appliances (AC mains terminals)

Frequency range (MHz)	Appliances rated 100 V, without an earth connection Quasi-peak (dBμV)	Appliances rated 100 V, without an earth connection Average (dBμV)	All other appliances Quasi-peak (dBμV)	All other appliances Average (dBμV)
0.009 – 0.05	122	—	110	—
0.05 – 0.15	102 to 92 *	—	90 to 80 *	—
0.15 – 0.5	72 to 62 *	62 to 52 *	66 to 56 *	56 to 46 *
0.5 – 5	56	46	56	46
5 – 30	60	50	60	50
Note: The more stringent limit applies at transition frequencies. * The limit level in dBμV decreases linearly with the logarithm of frequency.				

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS:

Note: The limits on the plots from 150kHz – 30MHz cover both ICES-001 and FCC Part 15.207.

9.1. EUT With Load

9.1.1. OPERATING MODE WITH LOAD POWERED BY AC/DC ADAPTER


LINE 1 RESULTS

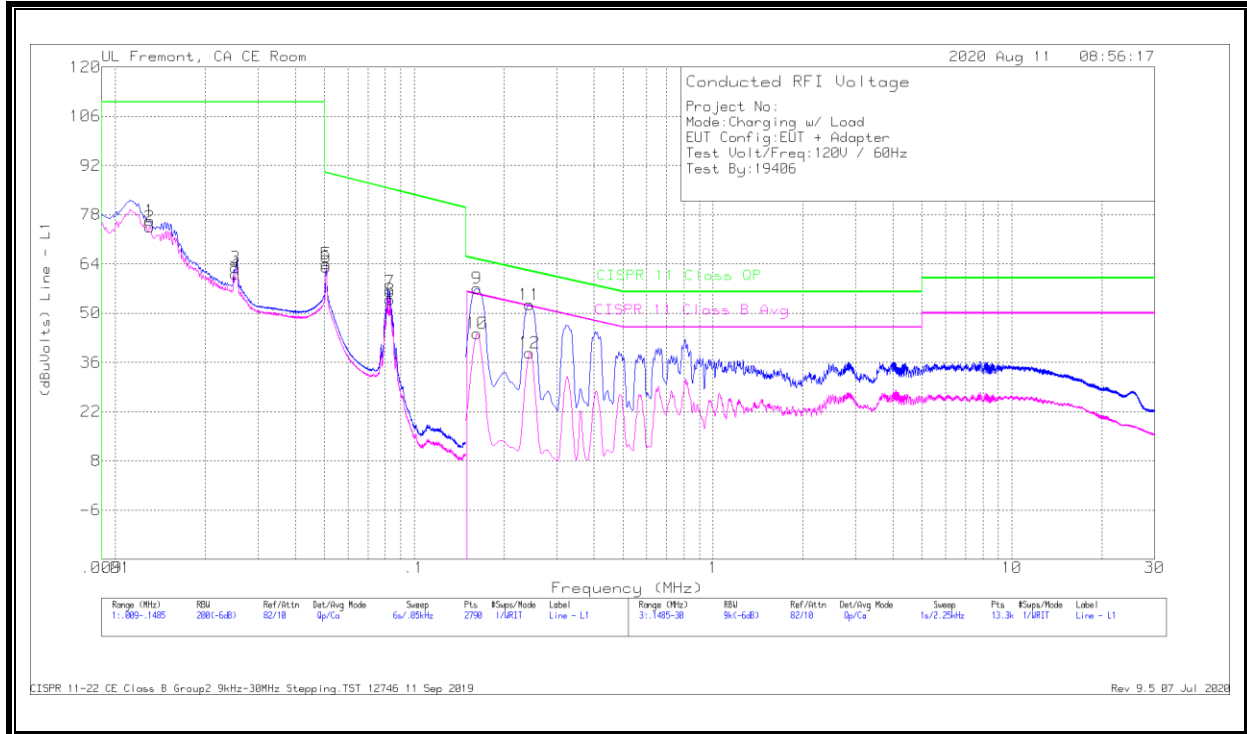

WORST EMISSIONS

Range 1: Line - L1 .009 - .1485MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
1	.01305	65.82	Qp	.1	0	10.5	76.42	110	-33.58	-	-
2	.01305	63.94	Ca	.1	0	10.5	74.54	-	-	-	-
3	.02525	52.71	Qp	.1	0	10.1	62.91	110	-47.09	-	-
4	.02525	50.98	Ca	.1	0	10.1	61.18	-	-	-	-
5	.05075	53.88	Qp	.1	0	10	63.98	89.86	-25.88	-	-
6	.05075	53.08	Ca	.1	0	10	63.18	-	-	-	-
7	.0828	46.13	Qp	.1	0	10	56.23	85.37	-29.14	-	-
8	.08285	43.79	Ca	.1	0	10	53.89	-	-	-	-
Range 3: Line - L1 .1485 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
9	.162	47.14	Qp	0	0	10	57.14	65.28	-8.14	-	-
10	.162	34.15	Ca	0	0	10	44.15	-	-	55.36	-11.21
11	.243	42.4	Qp	0	0	10	52.4	61.94	-9.54	-	-
12	.243	28.65	Ca	0	0	10	38.65	-	-	51.99	-13.34

LINE 2 RESULTS

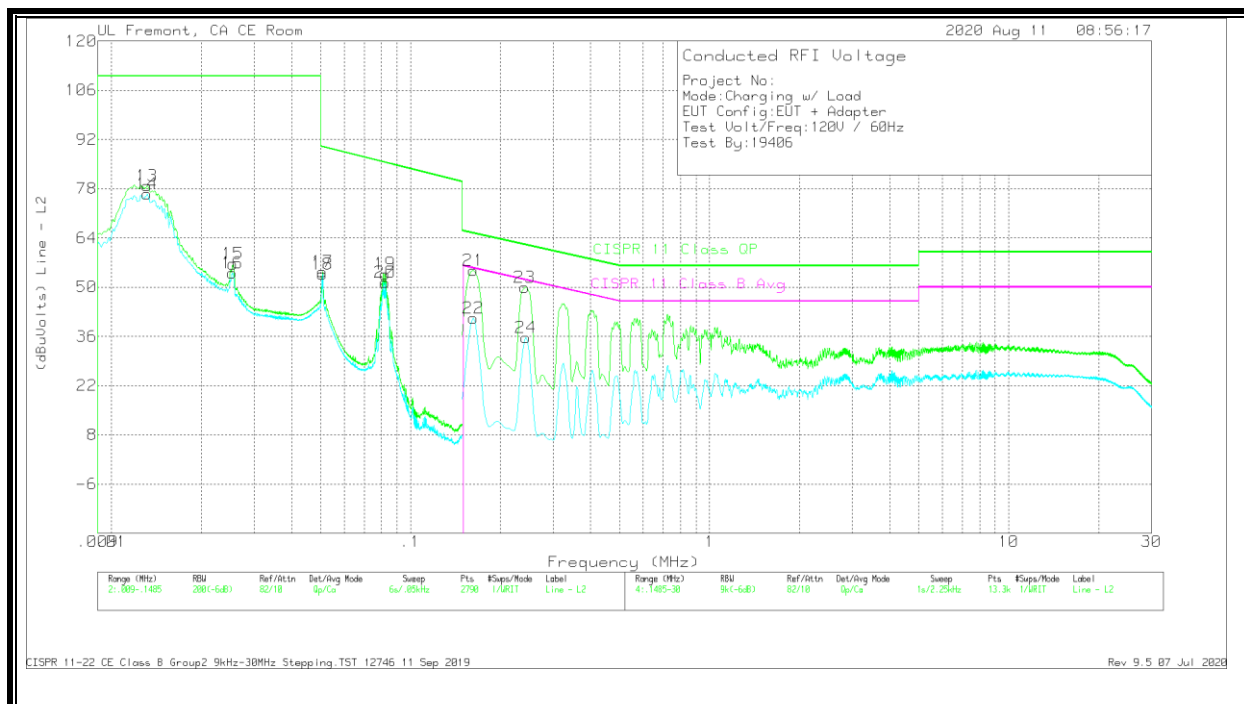

WORST EMISSIONS


Range 2: Line - L2 .009 - .1485MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
13	.01315	68.29	Qp	.1	0	10.4	78.79	110	-31.21	-	-
14	.01315	65.96	Ca	.1	0	10.4	76.46	-	-	-	-
15	.0255	46.43	Qp	.1	0	10.1	56.63	110	-53.37	-	-
16	.0253	43.77	Ca	.1	0	10.1	53.97	-	-	-	-
17	.05085	44.3	Qp	.1	0	10	54.4	89.85	-35.45	-	-
18	.05085	43.61	Ca	.1	0	10	53.71	-	-	-	-
19	.0823	43.67	Qp	.1	0	10	53.77	85.42	-31.65	-	-
20	.08225	41.28	Ca	.1	0	10	51.38	-	-	-	-
Range 4: Line - L2 .1485 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
21	.162	44.83	Qp	0	0	10	54.83	65.28	-10.45	-	-
22	.162	31.24	Ca	0	0	10	41.24	-	-	55.36	-14.12
23	.24075	40	Qp	0	0	10	50	62.02	-12.02	-	-
24	.243	25.65	Ca	0	0	10	35.65	-	-	51.99	-16.34

Qp - Quasi-Peak detector
Ca - CISPR average detection

CISPR 11-22 CE Class B Group2 9kHz-30MHz Stepping.TST 12746 11 Sep 2019
Rev 9.5 07 Jul 2020

9.1.2. OPERATING MODE WITH LOAD POWERED BY HOST LAPTOP VIA USB CABLE

LINE 1 RESULTS

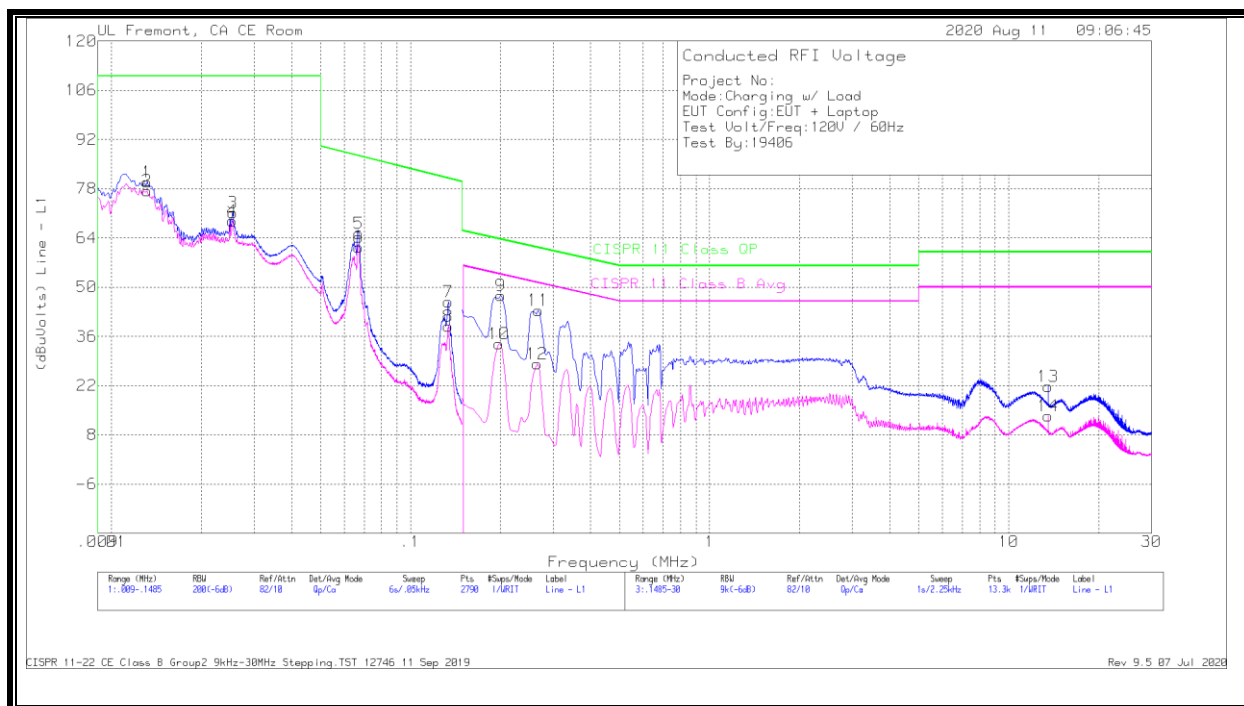

WORST EMISSIONS

Range 1: Line - L1 .009 - .1485MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
1	.01315	69.36	Qp	.1	0	10.4	79.86	110	-30.14	-	-
2	.01315	66.98	Ca	.1	0	10.4	77.48	-	-	-	-
3	.02545	60.9	Qp	.1	0	10.1	71.1	110	-38.9	-	-
4	.0253	58.57	Ca	.1	0	10.1	68.77	-	-	-	-
5	.0671	55.18	Qp	.1	0	10	65.28	87.3	-22.02	-	-
6	.0671	51.2	Ca	.1	0	10	61.3	-	-	-	-
7	.13395	35.69	Qp	.1	0	10	45.79	80.95	-35.16	-	-
8	.13395	28.81	Ca	.1	0	10	38.91	-	-	-	-


Range 3: Line - L1 .1485 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
9	.20025	37.54	Qp	0	0	10	47.54	63.54	-16	-	-
10	.198	23.95	Ca	0	0	10	33.95	-	-	53.69	-19.74
11	.26775	33.42	Qp	0	0	10	43.42	61.14	-17.72	-	-
12	.2655	18.1	Ca	0	0	10	28.1	-	-	51.26	-23.16
*13	13.56075	11.32	Qp	.1	.2	10.1	21.72	60	-38.28	-	-
*14	13.56075	3.02	Ca	.1	.2	10.1	13.42	-	-	50	-36.58

Qp - Quasi-Peak detector
Ca - CISPR average detection

CISPR 11-22 CE Class B Group2 9kHz-30MHz Stepping.TST 12746 11 Sep 2019
Rev 9.5 07 Jul 2020

*Indicates UL RFID signal. Not from device.

LINE 2 RESULTS

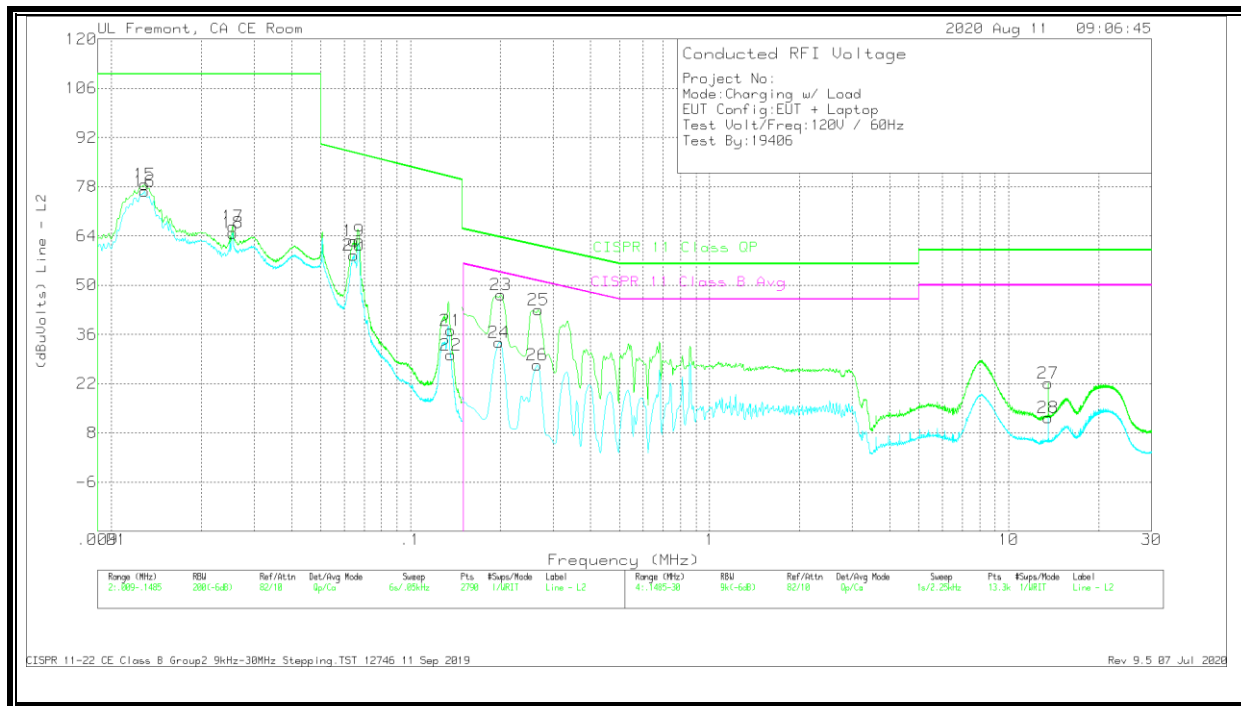

WORST EMISSIONS

Range 2: Line - L2 .009 - .1485MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
15	.0129	68.14	Qp	.1	0	10.5	78.74	110	-31.26	-	-
16	.0129	66.06	Ca	.1	0	10.5	76.66	-	-	-	-
17	.02545	56.56	Qp	.1	0	10.1	66.76	110	-43.24	-	-
18	.02545	54.64	Ca	.1	0	10.1	64.84	-	-	-	-
19	.0647	52.5	Qp	.1	0	10	62.6	87.63	-25.03	-	-
20	.06465	48.43	Ca	.1	0	10	58.53	-	-	-	-
21	.13625	26.97	Qp	.1	0	10	37.07	80.79	-43.72	-	-
22	.13623	20.05	Ca	.1	0	10	30.15	-	-	-	-

Range 4: Line - L2 .1485 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading (dBuVolts)	CISPR 11 Class QP	Margin (dB)	CISPR 11 Class B Avg	Margin (dB)
23	.20025	37.18	Qp	0	0	10	47.18	63.54	-16.36	-	-
24	.198	23.72	Ca	0	0	10	33.72	-	-	53.69	-19.97
25	.26775	32.99	Qp	0	0	10	42.99	61.14	-18.15	-	-
26	.2655	17.21	Ca	0	0	10	27.21	-	-	51.26	-24.05
*27	13.56075	11.67	Qp	.1	.2	10.1	22.07	60	-37.93	-	-
*28	13.56075	1.94	Ca	.1	.2	10.1	12.34	-	-	50	-37.66

Qp - Quasi-Peak detector
Ca - CISPR average detection

CISPR 11-22 CE Class B Group2 9kHz-30MHz Stepping.TST 12746 11 Sep 2019
Rev 9.5 07 Jul 2020

*Indicates UL RFID signal. Not from device.

10. SETUP PHOTOS

Please refer to 13335182-EP1V1 for setup photos

END OF TEST REPORT