



TEST REPORT

Report Number: 13389132-E3V1

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2411, A2412, A2413

FCC ID : BCG-E3550A

IC : 579C-E3550A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 21, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	09/21/2020	Initial Issue	Chin Pang

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	4
2. TEST SUMMARY	5
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
5.1. <i>METROLOGICAL TRACEABILITY</i>	6
5.2. <i>DECISION RULES.....</i>	6
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
6. INTRODUCTION OF TEST DATA REUSE.....	7
6.1. <i>EUT DESCRIPTION</i>	7
6.2. <i>INTRODUCTION</i>	7
6.3. <i>DIFFERENCE IN MODEL NUMBER.....</i>	7
6.4. <i>SPOT CHECK VERIFICATION RESULTS SUMMARY</i>	7
6.5. <i>REFERENCE DETAIL</i>	14
6.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	14
6.7. <i>SOFTWARE AND FIRMWARE.....</i>	14
6.8. <i>WORST-CASE CONFIGURATION AND MODE</i>	14
6.9. <i>DESCRIPTION OF TEST SETUP.....</i>	15
7. MEASUREMENT METHOD.....	16
8. TEST AND MEASUREMENT EQUIPMENT	16
9. SETUP PHOTOS.....	16
Appendix A – Reference Test Report	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2411, A2412, A2413

SERIAL NUMBER: (Original): G6TCQ01TQ897, G6TCQ02KQ897
(Spot Check): G6TD401R06R1, G6TD401N06R1

DATE TESTED: AUGUST 16, 2020 -AUGUST 28, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Francisco Guarnero
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Road
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D	<input checked="" type="checkbox"/> Chamber I
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E	<input checked="" type="checkbox"/> Chamber J
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F	<input type="checkbox"/> Chamber K
	<input type="checkbox"/> Chamber G	<input type="checkbox"/> Chamber L
	<input type="checkbox"/> Chamber H	<input type="checkbox"/> Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. INTRODUCTION OF TEST DATA REUSE

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID BCG-E3548A, IC: 579C-E3548A to cover variant model BCG-E3550A, 579C-E3550A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

6.3. DIFFERENCE IN MODEL NUMBER

Models A2411, A2412, and A2413 are electrically identical and the model numbers are allocated for marketing and logistic purposes only. Model A2411 was used for the spot check testing described in this report.

6.4. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device model A2411, FCC ID: BCG-E3550A, IC: 579C-E3550A for radiated spurious and radiated band-edge in accordance with the Test Plan that was approved via KDB inquiry.

BCG-E3550A SPOT CHECK RESULTS										
Technology	Mode	Test Item	Channel	Measured	Original model		Spot check model		Delta	
					A2342		A2411, A2412, A2413			
					BCG-E3548A		BCG-E3550A			
					579C-E3548A		579C-E3550A			
HDR	HDR8	RBE	Low	Frequency (MHz)	Peak (dBuV)	Ave (dBuV)	Peak (dBuV)	Ave (dBuV)	Peak	Ave
			High	2390.0	57.94	45.49	49.56	37.38	-8.38	-8.11
	HDR8	RSE	Mid	24835	65.33	51.26	60.51	47.88	-4.82	-3.38
				4833.0	45	33.81	NF	NF	NA	NA

Comparison of the models, upper deviation is within 3dB range and all tests are under FCC Technical Limits. The test report for FCC ID BCG-E3548A, IC: 579C-E3548A is therefore being used to support the application for certification for FCC ID: BCG-E3550A, IC: 579C-E3550A.


Note: The output powers were verified on model A2411 to match with model A2342 before radiated emissions spot check was performed.

Note: NF: Noise Floor

SPOT CHECK DATA

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

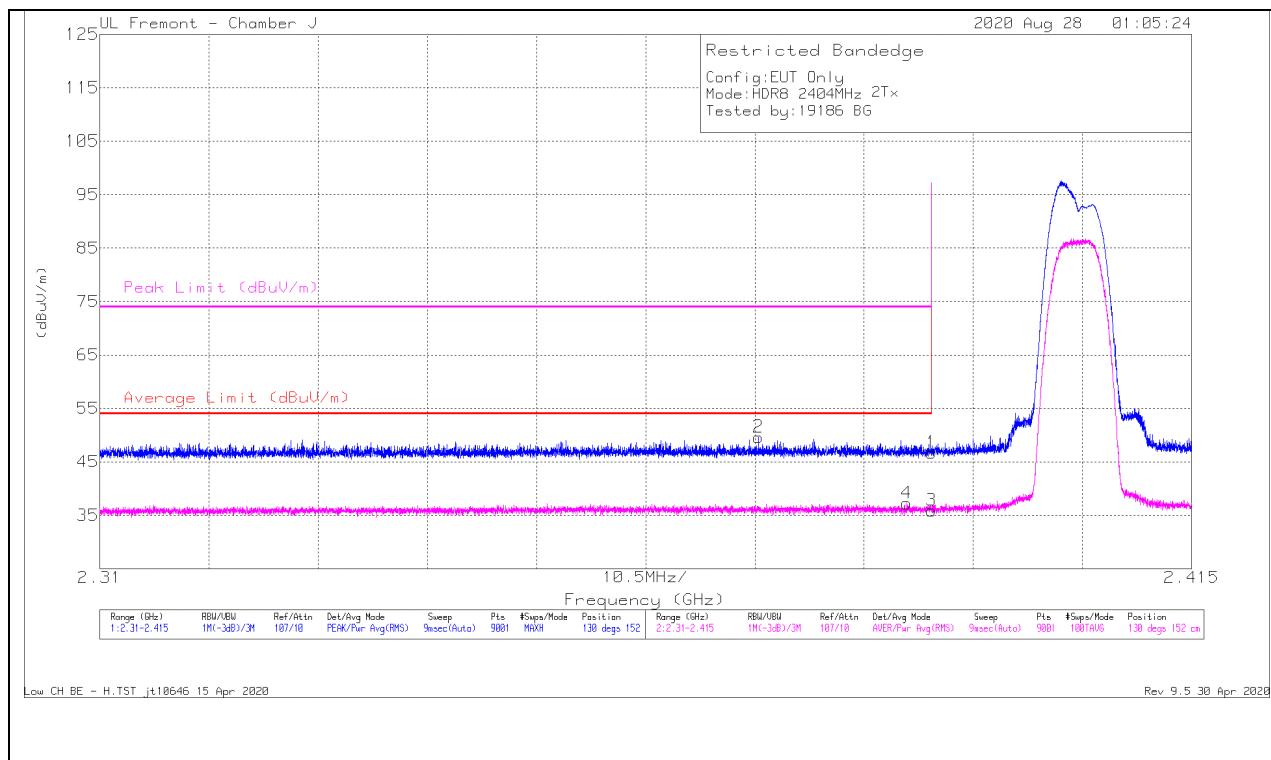

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Chl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.87	Pk	29	-25.2	46.67	-	-	74	-27.33	130	152	H
2	* 2.37333	45.8	Pk	29	-25.2	49.6	-	-	74	-24.4	130	152	H
3	* 2.38999	32.11	RMS	29	-25.2	35.91	54	-18.09	-	-	130	152	H
4	* 2.38762	33.45	RMS	29	-25.2	37.25	54	-16.75	-	-	130	152	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

Low CH BE - H.TST jt10646 15 Apr 2020
 Rev 9.5 30 Apr 2020

VERTICAL RESULT

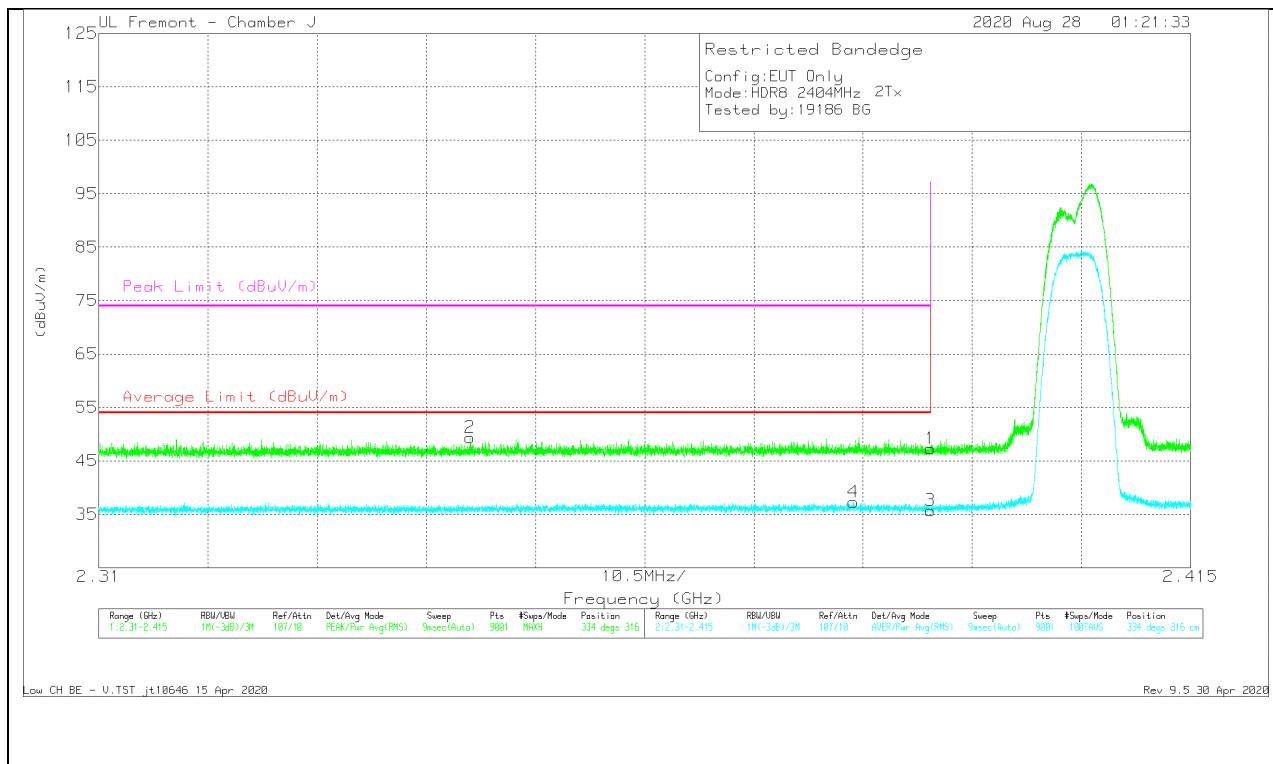

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	43.46	Pk	29	-25.2	47.26	-	-	74	-26.74	334	316	V
2	* 2.34568	45.72	Pk	28.9	-25.3	49.32	-	-	74	-24.68	334	316	V
3	* 2.38999	31.9	RMS	29	-25.2	35.7	54	-18.3	-	-	334	316	V
4	* 2.38257	33.48	RMS	29	-25.2	37.28	54	-16.72	-	-	334	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector


RMS - RMS detection

Low CH BE - V.TST jt10646 15 Apr 2020

Rev 9.5 30 Apr 2020

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

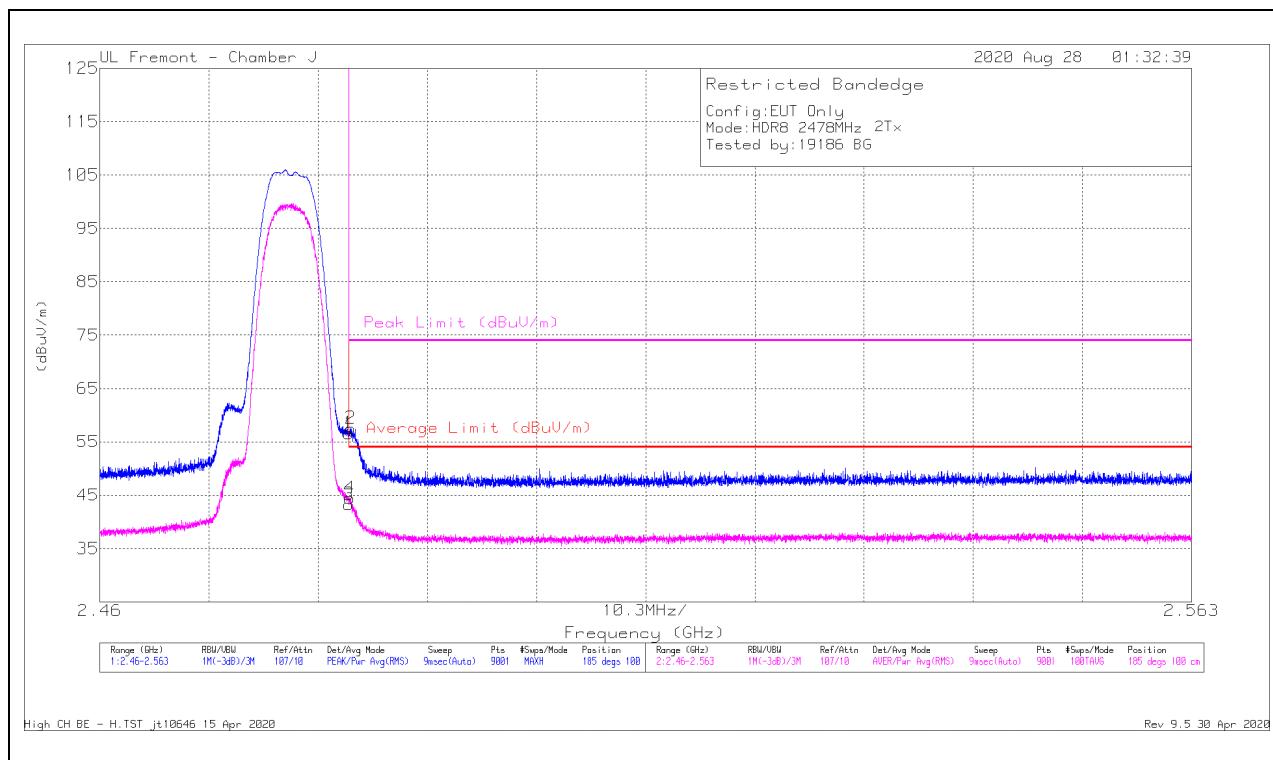

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.3	Pk	29.5	-25.2	56.6	-	-	74	-17.4	185	100	H
2	* 2.48369	53.22	Pk	29.5	-25.2	57.52	-	-	74	-16.48	185	100	H
3	* 2.48351	38.97	RMS	29.5	-25.2	43.27	54	-10.73	-	-	185	100	H
4	* 2.48357	40.17	RMS	29.5	-25.2	44.47	54	-9.53	-	-	185	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

High CH BE - H.TST jt10646 15 Apr 2020
 Rev 9.5 30 Apr 2020

VERTICAL RESULT

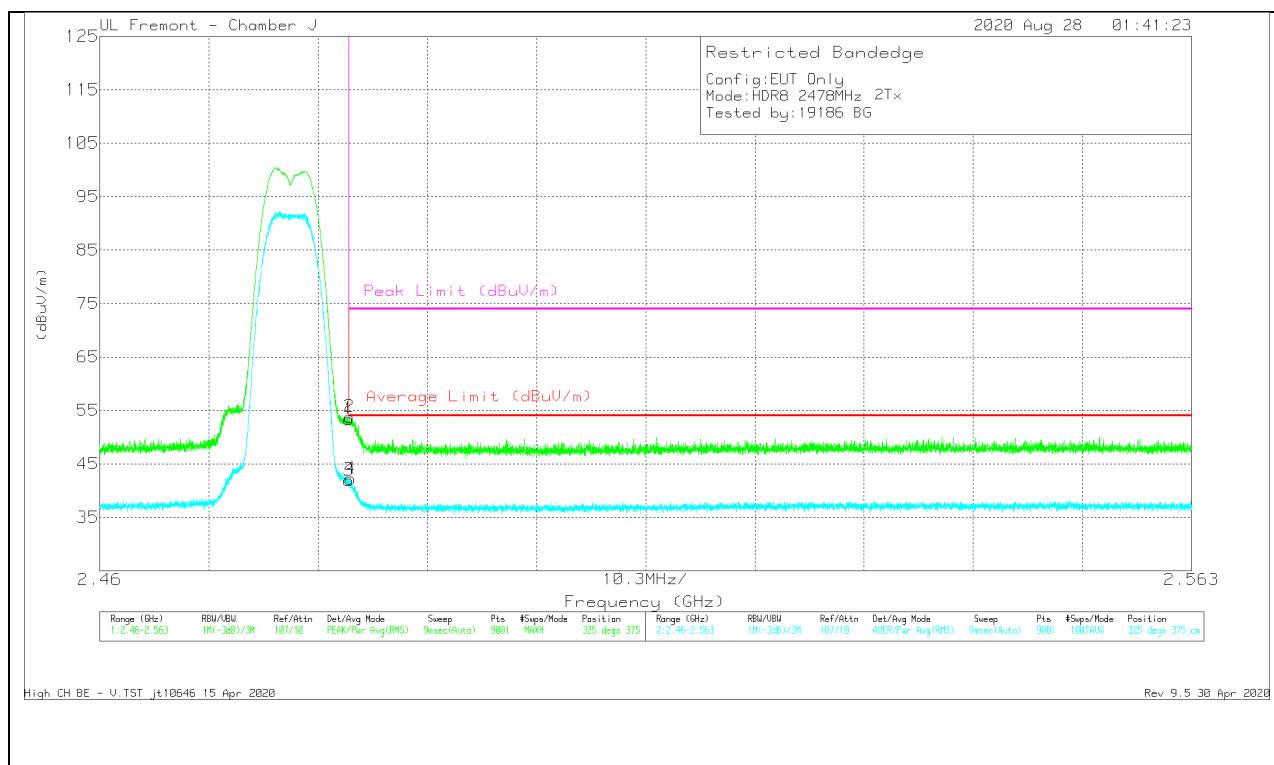

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.07	Pk	29.5	-25.2	53.37	-	-	74	-20.63	325	375	V
2	* 2.48355	49.49	Pk	29.5	-25.2	53.79	-	-	74	-20.21	325	375	V
3	* 2.48351	37.63	RMS	29.5	-25.2	41.93	54	-12.07	-	-	325	375	V
4	* 2.48364	37.93	RMS	29.5	-25.2	42.23	54	-11.77	-	-	325	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection


High CH BE - V.TST jt10646 15 Apr 2020
Rev 9.5 30 Apr 2020

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

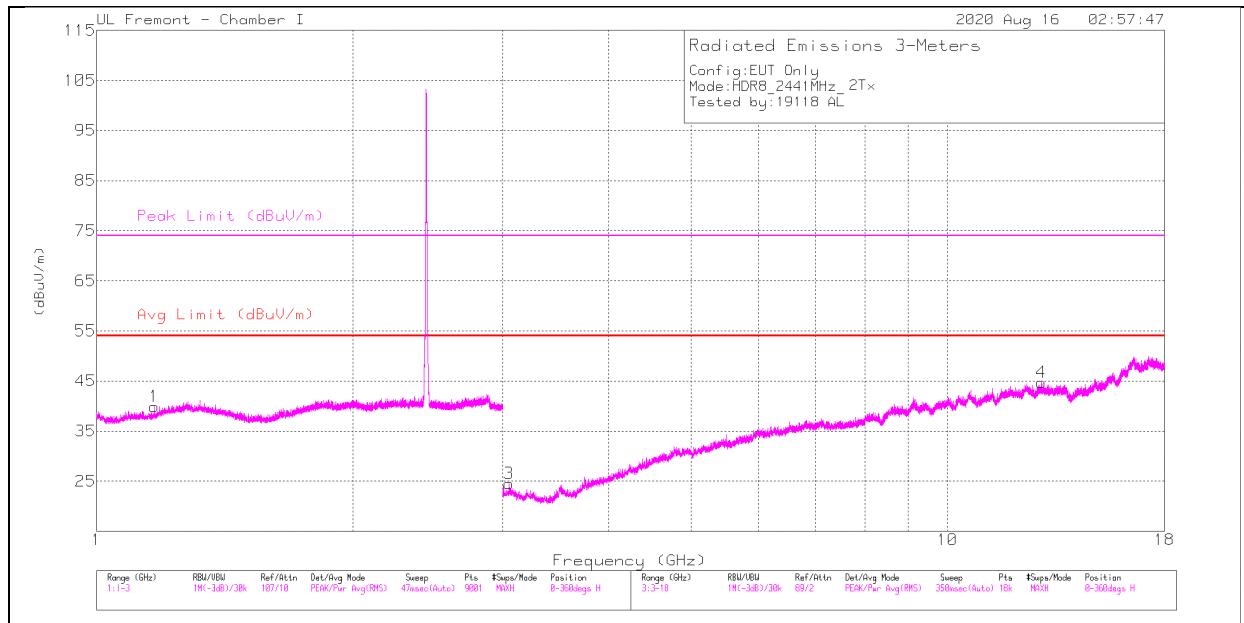

HORIZONTAL

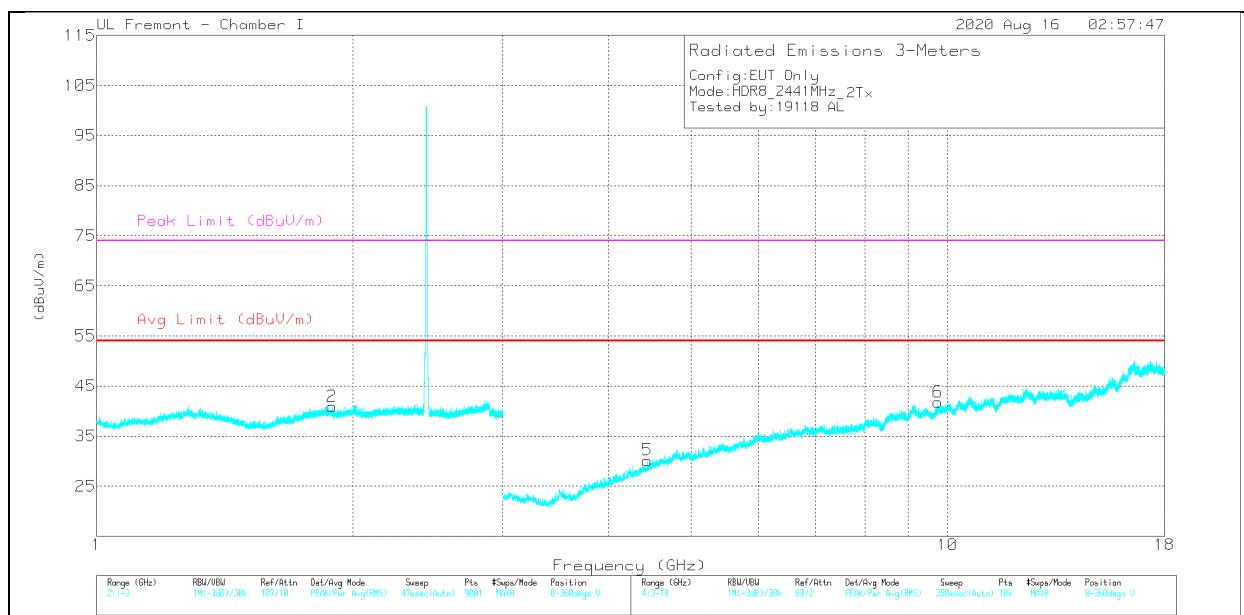

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fltr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.16976	38.24	PK2	27.5	-19.2	46.54	-	-	74	-27.46	101	335	H
	* 1.16829	25.12	MAv1	27.5	-19.2	33.42	54	-20.58	-	-	101	335	H
2	1.89043	36.11	PK2	30.9	-18.2	48.81	-	-	-	-	2	288	V
3	3.0502	34.04	PK2	33.1	-26.1	41.04	-	-	-	-	318	399	H
4	12.89072	30.09	PK2	39.2	-19.3	49.99	-	-	-	-	356	291	H
5	4.43848	27.04	PK2	33.8	-24.6	36.24	-	-	-	-	276	156	V
6	9.7544	28.97	PK2	37	-18	47.97	-	-	-	-	41	293	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

Mode HDR8 ePA 2441MHz 2Tx.DAT 30915 29 Dec 2015
Rev 9.5 30 Apr 2020

6.5. REFERENCE DETAIL

Reference application that contains the reference data which is attached to this report in Appendix A.

Equipment Class	Reference FCC ID & IC	Reference Report	Report Title/Section
DTS	BCG-E3548A 579C-E3548A	13335182-E3	FCC IC_HDR Report / All sections

6.6. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	0.3	-1.7

6.7. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was FW Version: 18.1.148.558

6.8. WORST-CASE CONFIGURATION AND MODE

Radiated band edge and spurious emissions from 1GHz to 18GHz were performed based on the Model A2342 worst case with the EUT set at highest power at Low/Middle/High channels.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

6.9. DESCRIPTION OF TEST SETUP


SUPPORT TEST EQUIPMENT				
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC
Laptop	Apple	A1398	C02PM012G3QD	DQS-BRCM1069
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	N/A
EUT AC/DC adapter	Apple	A1385	D29325SM03XDHLHC9	N/A

I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A

TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

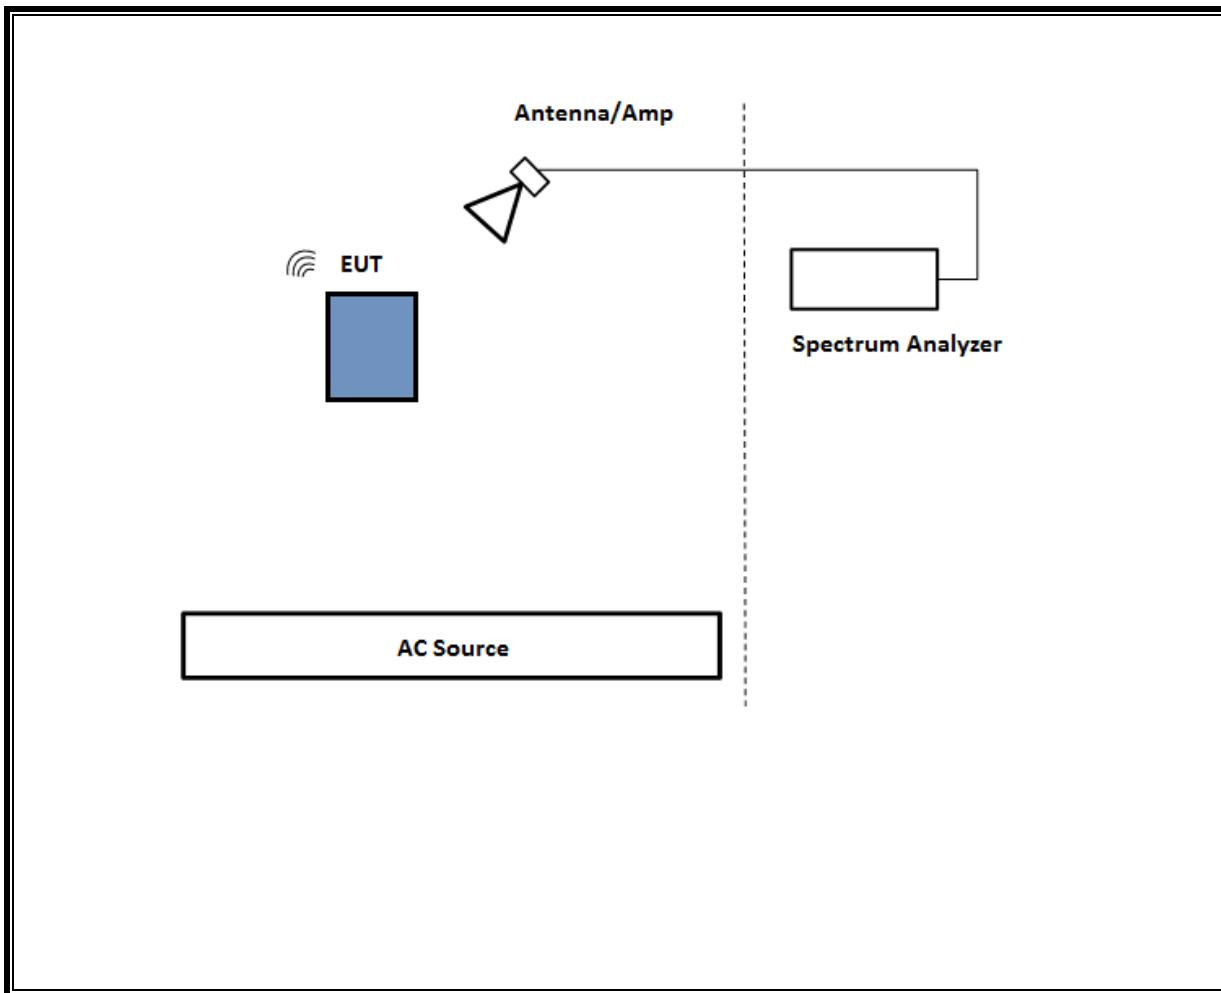

7. MEASUREMENT METHOD

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter.

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause – 11.11 & Clause 13

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as HDR normal modes.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Double Ridge Guide Horn Antenna	A.H. Systems, Inc.	SAS-571	T963	01/25/2021	01/25/2020
Amplifier, 1 to 18GHz, 35dB	AMPLICAL	AMP1G18-35	T1571	08/20/2021	08/20/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179522	02/20/2021	02/20/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	07/20/2021	07/20/2020
*RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	171460	08/24/2020	08/24/2019
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020
EMI Test Receiver	Rohde & Schwarz	ESW44	Pre0179367	05/16/2020	05/16/2020

UL AUTOMATION SOFTWARE			
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020

*Testing is completed before equipment expiration date.

9. SETUP PHOTOS

Please refer to 13335182-EP1 for setup photos

END OF TEST REPORT

Appendix A – Reference Test Report

Attached is the test report (13335182-E3) containing the reference data from the parent model as detailed in section 6.5.



TEST REPORT

Report Number: 13335182-E3V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2342

FCC ID : BCG-E3548A

IC : 579C-E3548A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 25, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	9/21/2020	Initial Issue	Chin Pang
V2	9/25/2020	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. <i>METROLOGICAL TRACEABILITY</i>	8
5.2. <i>DECISION RULES</i>	8
5.3. <i>MEASUREMENT UNCERTAINTY</i>	8
6. EQUIPMENT UNDER TEST	9
6.1. <i>EUT DESCRIPTION</i>	9
6.2. <i>MAXIMUM OUTPUT POWER</i>	9
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	9
6.4. <i>SOFTWARE AND FIRMWARE</i>	9
6.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	10
6.6. <i>DESCRIPTION OF TEST SETUP</i>	11
7. MEASUREMENT METHOD	16
8. TEST AND MEASUREMENT EQUIPMENT	17
9. ANTENNA PORT TEST RESULTS	18
9.1. <i>ON TIME AND DUTY CYCLE</i>	18
9.2. <i>99% BANDWIDTH</i>	20
9.2.1. <i>HIGH POWER HDR (HDR4)</i>	21
9.2.2. <i>HIGH POWER HDR TXBF (HDR4)</i>	22
9.2.3. <i>HIGH POWER HDR (HDR8)</i>	23
9.2.4. <i>HIGH POWER HDR TXBF (HDR8)</i>	24
9.3. <i>6 dB BANDWIDTH</i>	25
9.3.1. <i>HIGH POWER HDR (HDR4)</i>	26
9.4. <i>OUTPUT POWER</i>	27
9.4.1. <i>HIGH POWER HDR (HDR4)</i>	28
9.4.2. <i>HIGH POWER HDR TXBF (HDR4)</i>	28
9.4.3. <i>HIGH POWER HDR (HDR8)</i>	29
9.4.4. <i>HIGH POWER HDR TXBF (HDR8)</i>	29
9.4.5. <i>LOW POWER HDR (HDR4)</i>	30

9.4.6. LOW POWER HDR TXBF (HDR4)	30
9.4.7. LOW POWER HDR (HDR8)	31
9.4.8. LOW POWER HDR TXBF (HDR8)	31
9.5. AVERAGE POWER.....	32
9.5.1. HIGH POWER HDR (HDR4).....	33
9.5.2. HIGH POWER HDR TXBF (HDR4).....	33
9.5.3. HIGH POWER HDR (HDR8).....	34
9.5.4. HIGH POWER HDR TXBF (HDR8).....	34
9.5.5. LOW POWER HDR (HDR4)	35
9.5.6. LOW POWER HDR TXBF (HDR4)	35
9.5.7. LOW POWER HDR (HDR8)	36
9.5.8. LOW POWER HDR TXBF (HDR8)	36
9.6. POWER SPECTRAL DENSITY	37
9.6.1. HIGH POWER HDR (HDR4).....	38
9.6.2. HIGH POWER HDR TXBF (HDR4).....	39
9.6.3. HIGH POWER HDR (HDR8).....	40
9.6.4. HIGH POWER HDR TXBF (HDR8).....	41
9.6.5. LOW POWER HDR (HDR4)	42
9.6.6. LOW POWER HDR TXBF (HDR4)	43
9.6.7. LOW POWER HDR (HDR8)	44
9.6.8. LOW POWER HDR TXBF (HDR8)	45
9.7. CONDUCTED SPURIOUS EMISSIONS.....	46
9.7.1. HIGH POWER HDR (HDR4).....	47
9.7.2. HIGH POWER HDR TXBF (HDR4).....	49
9.7.3. HIGH POWER HDR (HDR8).....	51
9.7.4. HIGH POWER HDR TXBF (HDR8).....	53
9.7.5. LOW POWER HDR (HDR4)	55
9.7.6. LOW POWER HDR TXBF (HDR4)	57
9.7.7. LOW POWER HDR (HDR8)	59
9.7.8. LOW POWER HDR TXBF (HDR8)	61
10. RADIATED TEST RESULTS.....	63
10.1. LIMITS AND PROCEDURE.....	63
10.2. TRANSMITTER ABOVE 1 GHz.....	65
10.2.1. HIGH POWER HDR (HDR4)	65
10.2.2. HIGH POWER HDR TXBF (HDR4)	73
10.2.3. HIGH POWER HDR (HDR8)	77
10.2.4. HIGH POWER HDR TXBF (HDR8)	85
10.2.5. LOW POWER HDR (HDR4)	95
10.2.6. LOW POWER HDR TXBF (HDR4)	103
10.2.7. LOW POWER HDR (HDR8)	107
10.2.8. LOW POWER HDR TXBF (HDR8)	115
10.3. WORST CASE BELOW 1 GHz	119
10.4. WORST CASE 18-26 GHz	121
11. AC POWER LINE CONDUCTED EMISSIONS	123
11.1. AC Power Line With Laptop.....	124
11.2. AC Power Line With AC/DC Adapter.....	126

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2342

SERIAL NUMBER: G6TCQ01TQ897, G6TCQ02KQ897

DATE TESTED: JUNE 06, 2020 to SEPTEMBER 02, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input type="checkbox"/> Chamber D (IC:22541-1)	<input checked="" type="checkbox"/> Chamber I (IC: 2324A-5)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC:22541-2)	<input checked="" type="checkbox"/> Chamber J (IC: 2324A-6)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input type="checkbox"/> Chamber F (IC:22541-3)	<input type="checkbox"/> Chamber K (IC: 2324A-1)
	<input type="checkbox"/> Chamber G (IC:22541-4)	<input type="checkbox"/> Chamber L (IC: 2324A-3)
	<input checked="" type="checkbox"/> Chamber H (IC:22541-5)	<input type="checkbox"/> Chamber M (IC: 2324A-2)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2404 - 2478	HDR4	14.52	28.31
	Low Power			9.12	8.17
	High Power		HDR8	14.32	27.04
	Low Power			8.99	7.93
ANT 3	High Power	2404 - 2478	HDR4	14.59	28.77
	Low Power			9.13	8.18
	High Power		HDR8	14.39	27.48
	Low Power			8.98	7.91
BF,ANT 4 + ANT 3	High Power	2404 - 2478	HDR4	17.61	57.68
	Low Power			12.26	16.83
	High Power		HDR8	17.66	58.34
	Low Power			12.07	16.11

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	0.3	-1.7

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was FW Version: 18.1.148.558

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4 and ANT 3, it was determined that X (Flatbed) was the worst-case orientation for ANT 4 and 2TX Beamforming and Y (Landscape) orientation for ANT 3.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT					
Description		Manufacturer	Model	Serial Number	FCC ID/ DoC
Laptop		Apple	A1398	C02PM012G3QD	DQS-BRCM1069
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123	N/A
EUT AC/DC adapter		Apple	A1385	D29325SM03XDHLHC9	N/A
I/O CABLES (RF CONDUCTED TEST)					
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)
1	Antenna	1	SMA	Un-shielded	0.2
2	USB	1	USB	Shielded	1.0
3	AC	1	AC	Un-shielded	2
I/O CABLES (RF RADIATED TEST)					
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)
1	AC	1	AC	Un-shielded	2
2	USB	1	USB	Un-shielded	1


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

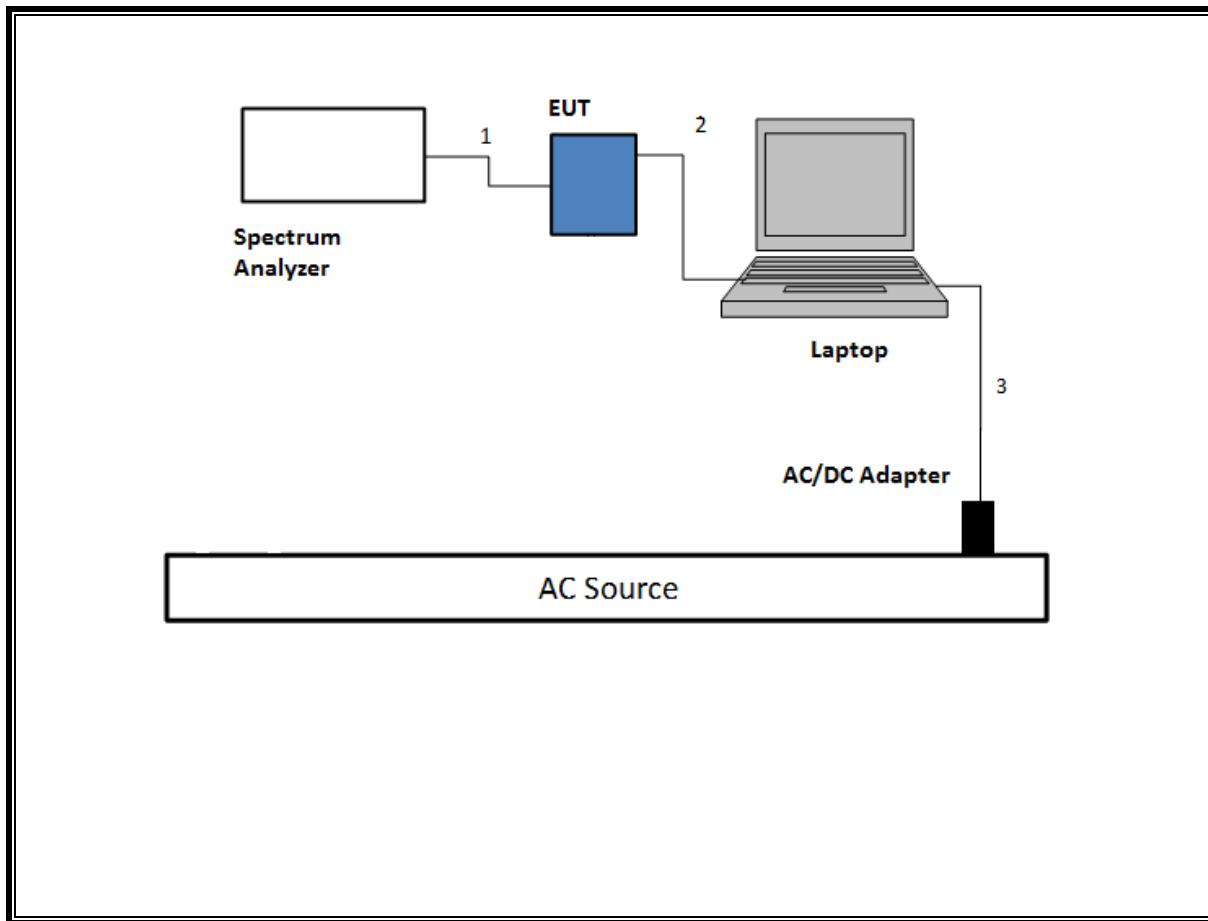


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

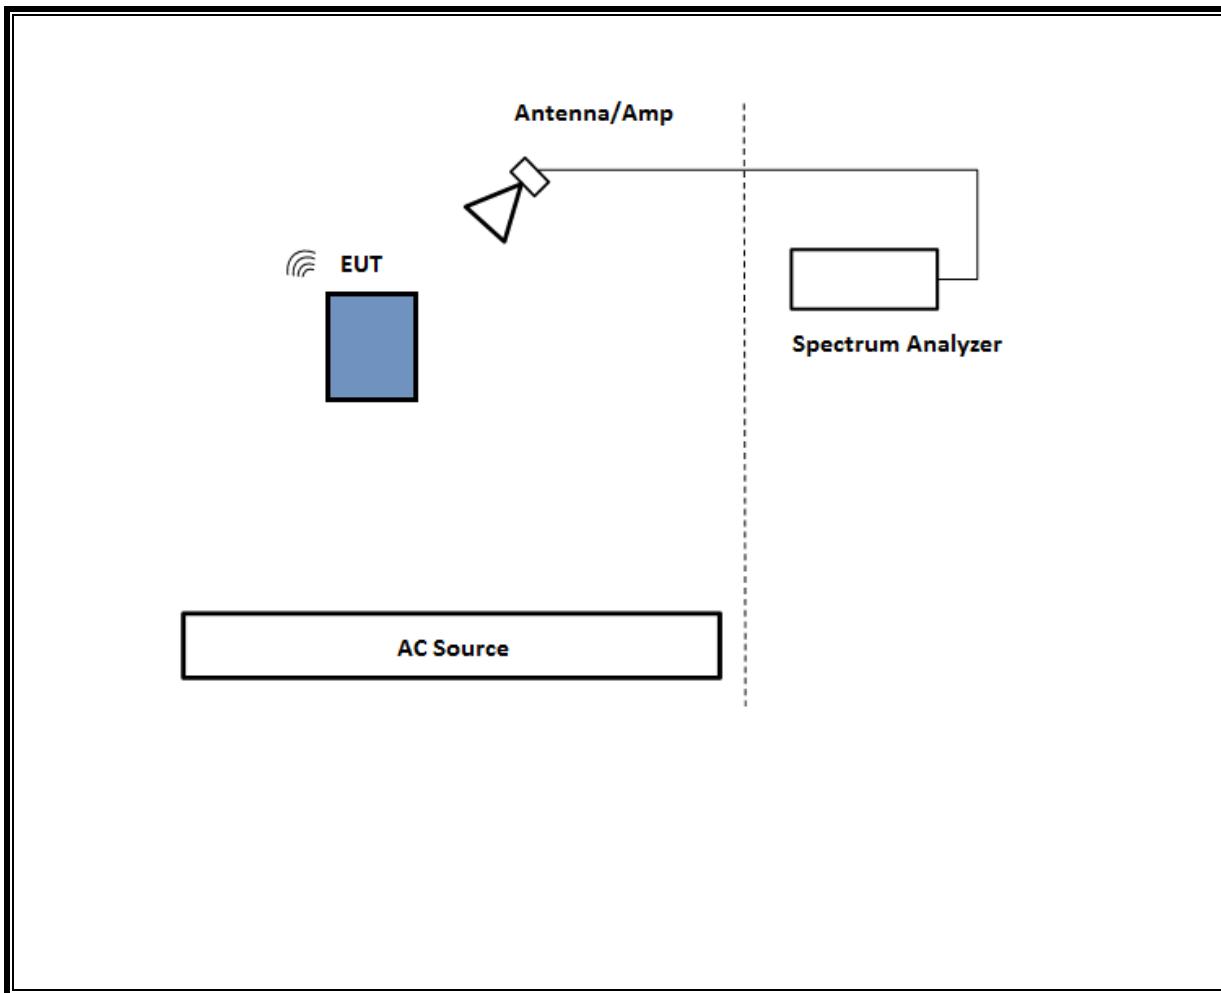

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

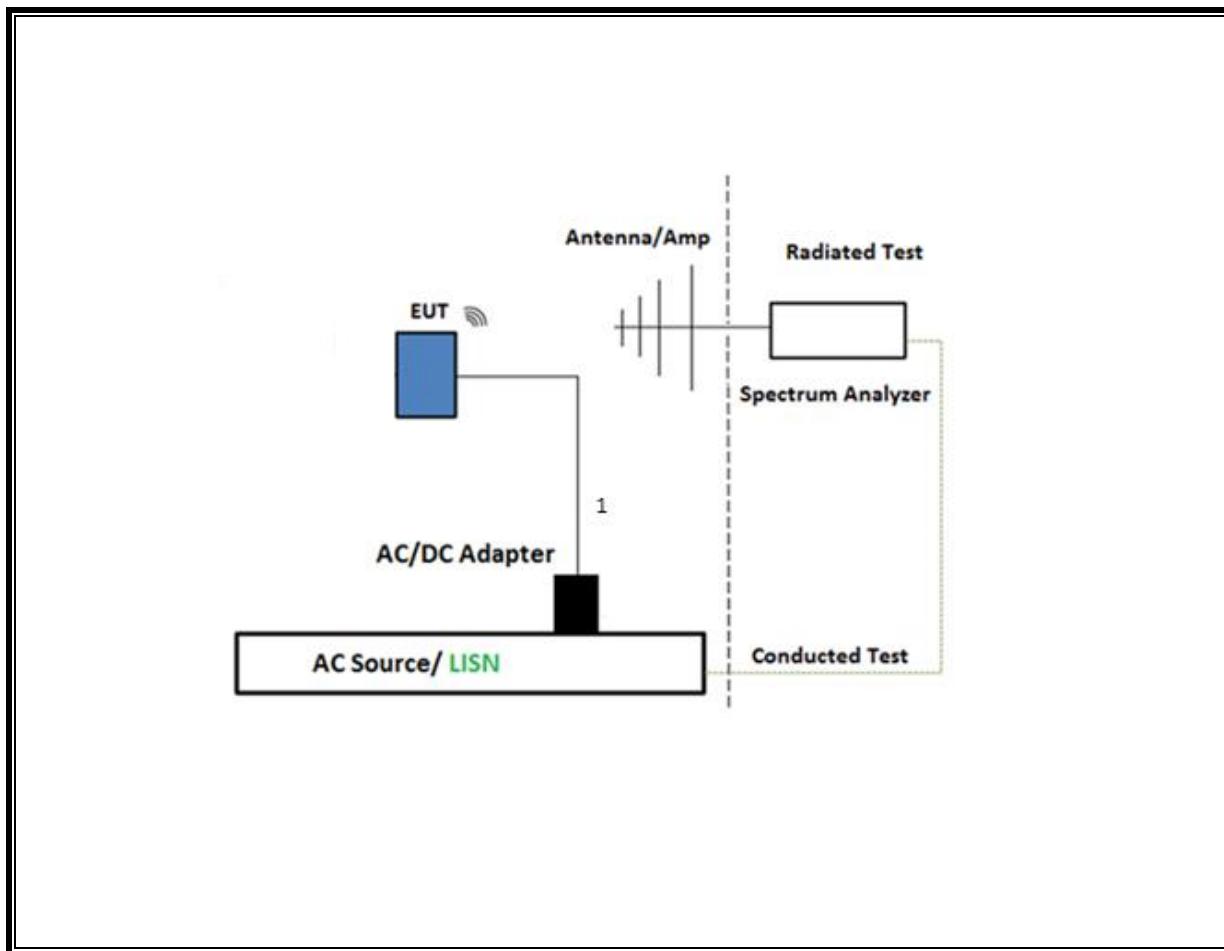

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

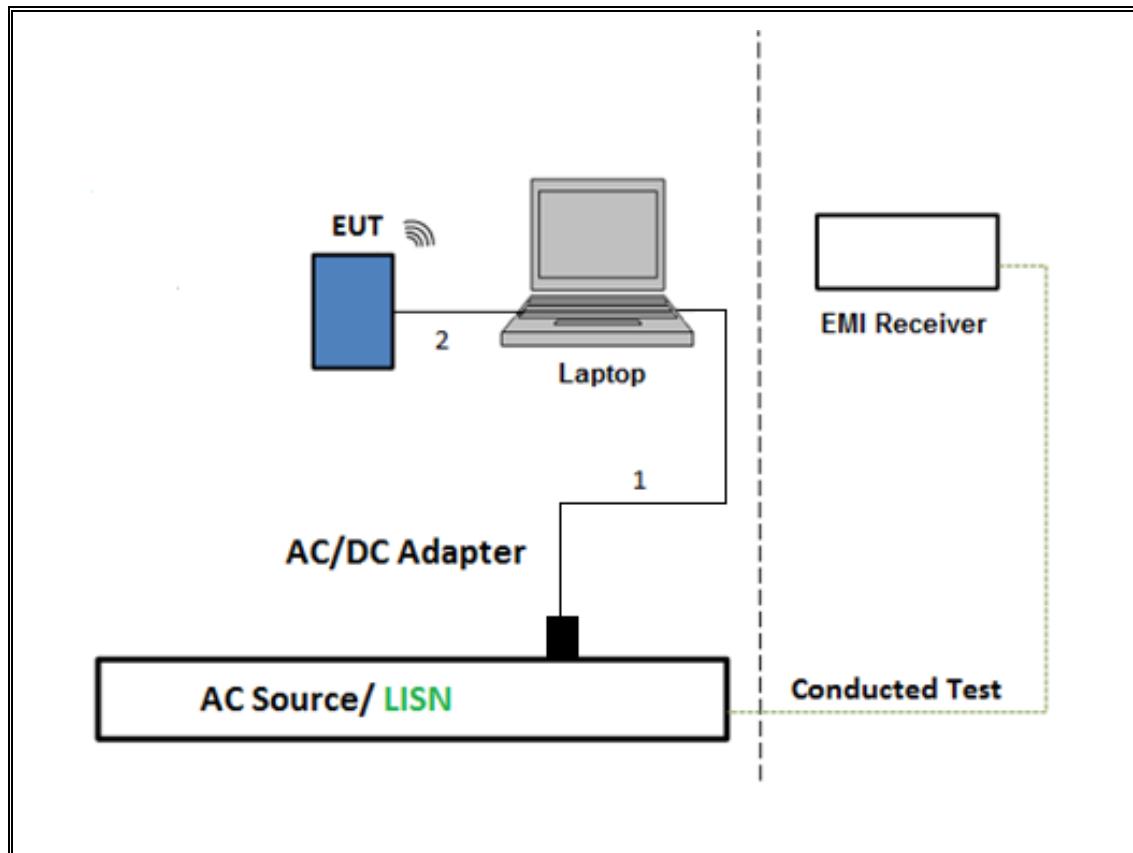

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05r02, Section 6.

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW \geq DTS BW

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter.

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause – 11.11 & Clause 13

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as HDR normal modes.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	08/19/2021	08/19/2020
Amplifier, 1 to 18GHz, 35dB	Miteq	AFS42-00101800-25-S-42	T1567	01/24/2021	01/24/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T346	07/20/2021	07/20/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	PRE0181078	05/06/2021	05/26/2020
Antenna, Horn 1-18GHz	A.H. System Inc	SAS-571	T963	01/25/2021	01/25/2020
*Amplifier, 1 to 18GHz	AMPLICAL	AMP1G18-35	T1771	05/28/2020	05/28/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T907	01/22/2021	01/22/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T339	01/21/2021	01/21/2020
*Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB1	T130	08/09/2020	08/09/2019
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310	PRE0072118	07/21/2021	07/21/2020
Antenna Horn, 18 to 26GHz	ARA	SWH-28	T125	04/17/2021	04/17/2020
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	04/08/2021	04/08/2020
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	10/01/2020	10/01/2019
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020
EMI Test Receiver	Rohde & Schwarz	ESW44	PRE0179522	02/20/2021	02/20/2020
EMI Test Receiver	Rohde & Schwarz	ESW44	PRE0179376	04/03/2021	04/03/2020

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	02/20/2021	02/20/2020
Power Cable, Line Conducted Emissions	UL	PG1	T861	10/27/2020	10/27/2019
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	PRE0186446	01/23/2021	01/23/2020

UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Rev 9.5, 30 Apr, 2020		
Conducted Software	UL	UL EMC	AP2020.8.6		
AC Line Conducted Software	UL	UL EMC	Rev 9.5, 21 Feb 2020		

*Testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.


ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
HDR4	22.5	22.5	1.00	100.0	0.00	0.010
HDR8	24.4	24.4	1.00	100.0	0.00	0.010
HDR4, TXBF	25.6	25.6	1.00	100.0	0.00	0.010
HDR8, TXBF	25.9	25.9	1.00	100.0	0.00	0.010

DUTY CYCLE PLOTS

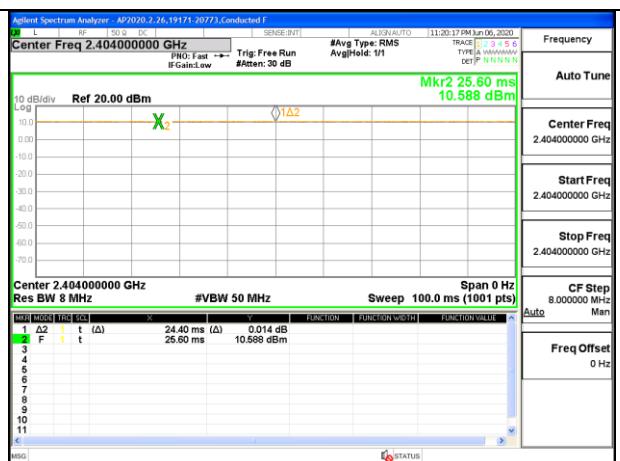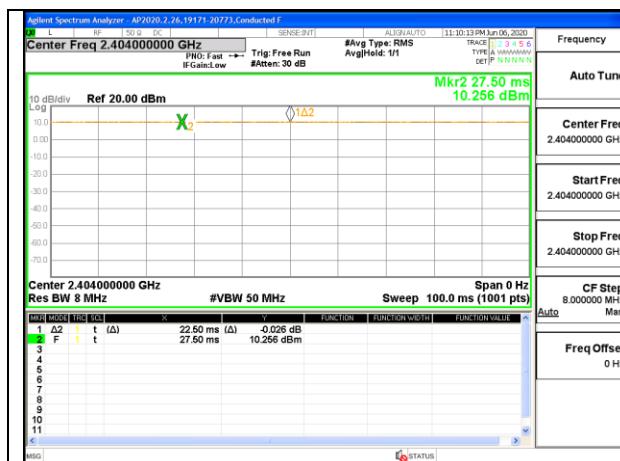

DUTY CYCLE HDR4

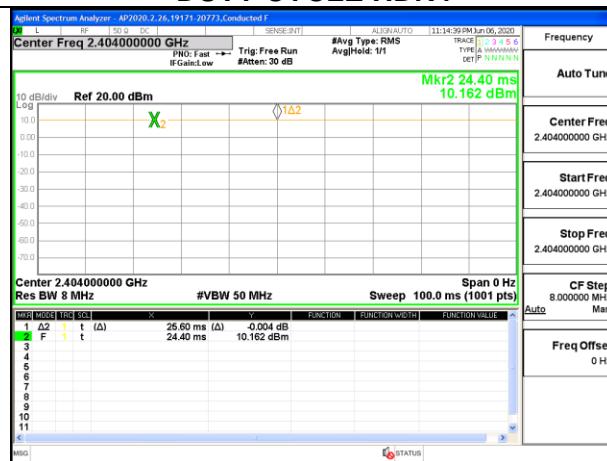

DUTY CYCLE HDR4 TXBF

DUTY CYCLE HDR8

DUTY CYCLE HDR8 TXBF

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


RESULTS

Only High Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.2713
Middle	2441	2.2907
High	2478	2.2967

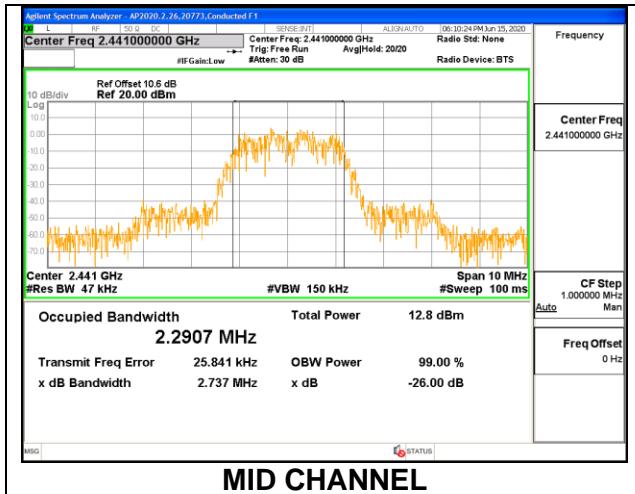


ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.2879
Middle	2441	2.2890
High	2478	2.2828

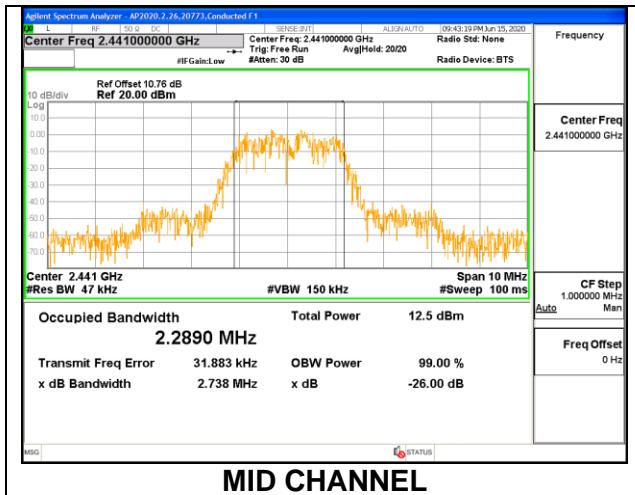

9.2.2. HIGH POWER HDR TXBF (HDR4)


Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	2.3068	2.3544
Middle	2441	2.3252	2.3531
High	2478	2.3069	2.3471

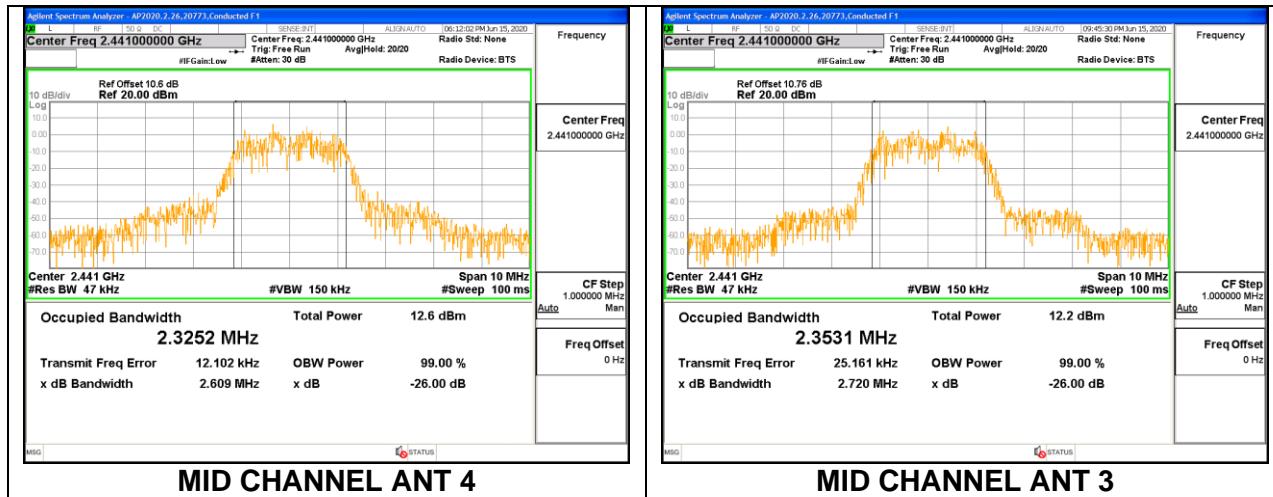

9.2.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.6438
Middle	2441	4.6662
High	2478	4.6167

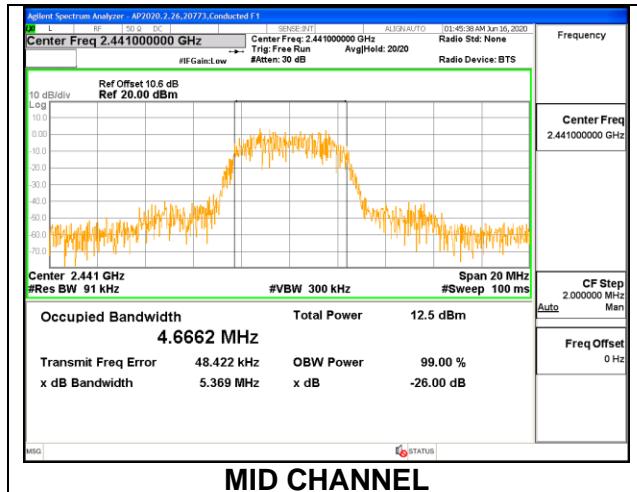


ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.5950
Middle	2441	4.6899
High	2478	4.6528

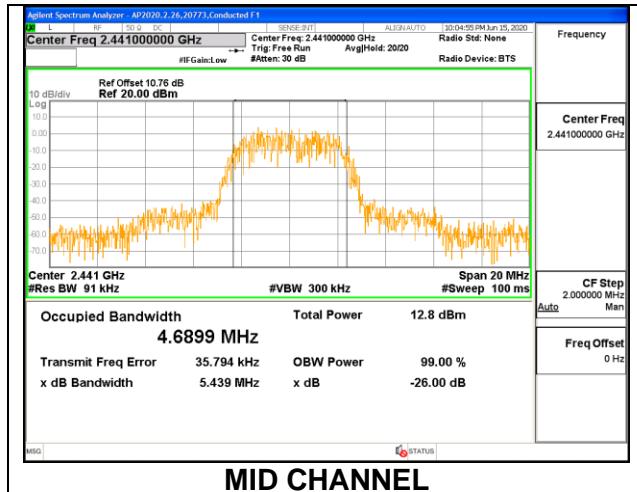

9.2.4. HIGH POWER HDR TXBF (HDR8)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	4.5917	4.6705
Middle	2441	4.5123	4.6385
High	2478	4.6940	4.6670

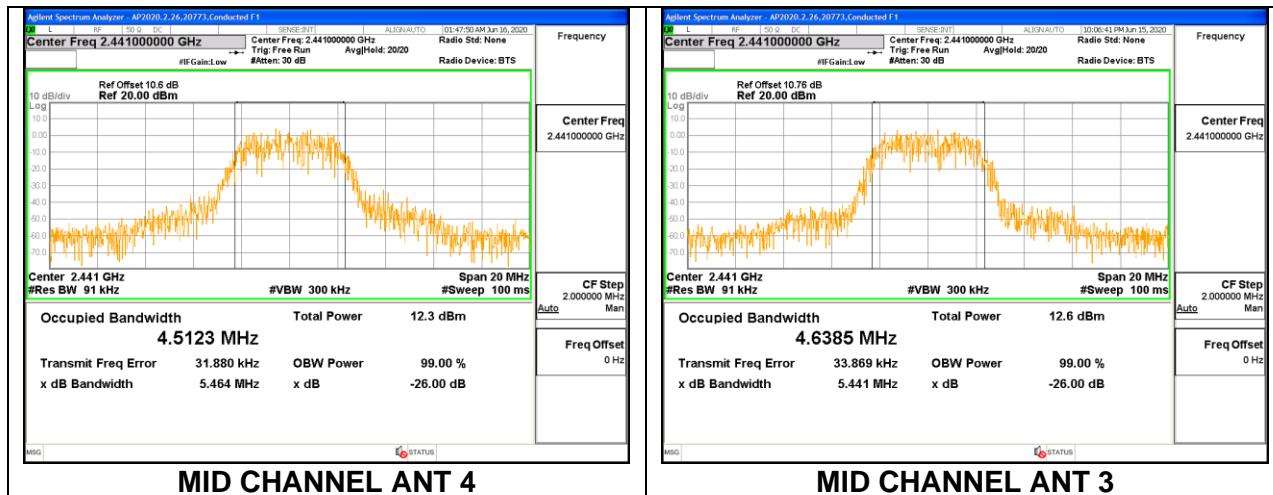

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


The 6dB bandwidth was measured for the narrowest bandwidth mode, High Power HDR4, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the High Power HDR4 mode, as demonstrated by the 99% bandwidth measurements performed on all modes.

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.3.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.097	0.5
Middle	2441	2.094	0.5
High	2478	2.091	0.5

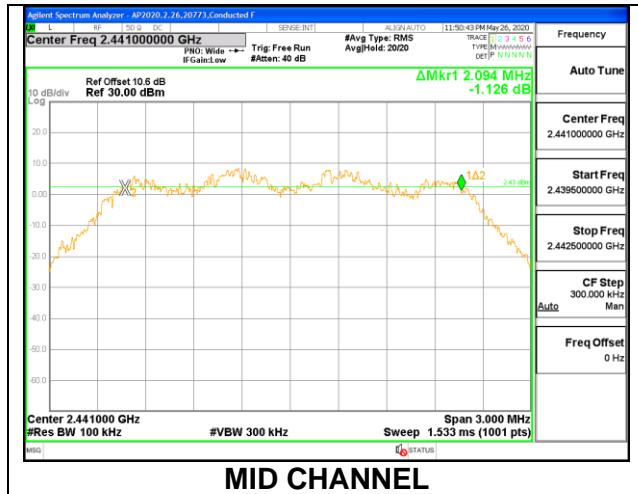

ANT 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.082	0.5
Middle	2441	2.070	0.5
High	2478	2.076	0.5

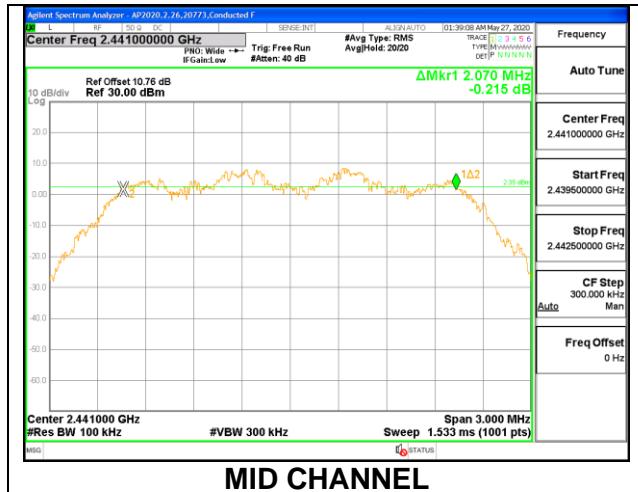

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Measurement was performed using a power meter with wideband power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from power meter

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power and PSD due to the device supporting Beamforming mode. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	0.30	-1.70	-0.59	2.37

RESULTS

9.4.1. HIGH POWER HDR (HDR4)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.50	30	-15.50
Middle	2441	14.52	30	-15.48
High	2478	14.44	30	-15.56

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.45	30	-15.55
Middle	2441	14.59	30	-15.41
High	2478	14.47	30	-15.53

9.4.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.57	14.52	17.56	30.00	-12.44
Middle	2441	14.62	14.58	17.61	30.00	-12.39
High	2478	14.53	14.50	17.53	30.00	-12.47

9.4.3. HIGH POWER HDR (HDR8)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.25	30	-15.75
Middle	2441	14.32	30	-15.68
High	2478	14.22	30	-15.78

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.32	30	-15.68
Middle	2441	14.39	30	-15.61
High	2478	14.36	30	-15.64

9.4.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	14.57	14.58	17.59	30.00	-12.41
Middle	2441	14.63	14.66	17.66	30.00	-12.34
High	2478	14.55	14.56	17.57	30.00	-12.43

9.4.5. LOW POWER HDR (HDR4)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.91	30	-21.09
Middle	2441	9.12	30	-20.88
High	2478	9.02	30	-20.98

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.13	30	-20.87
Middle	2441	9.09	30	-20.91
High	2478	9.10	30	-20.90

9.4.6. LOW POWER HDR TXBF (HDR4)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.20	9.18	12.20	30.00	-17.80
Middle	2441	9.23	9.26	12.26	30.00	-17.74
High	2478	9.17	9.17	12.18	30.00	-17.82

9.4.7. LOW POWER HDR (HDR8)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.94	30	-21.06
Middle	2441	8.99	30	-21.01
High	2478	8.89	30	-21.11

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.94	30	-21.06
Middle	2441	8.98	30	-21.02
High	2478	8.95	30	-21.05

9.4.8. LOW POWER HDR TXBF (HDR8)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	8.9	9.06	11.99	30.00	-18.01
Middle	2441	8.99	9.12	12.07	30.00	-17.93
High	2478	9.02	9.04	12.04	30.00	-17.96

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurement was performed using a power meter with wideband power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.5.1. HIGH POWER HDR (HDR4)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.69
Middle	2441	11.70
High	2478	11.63

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.59
Middle	2441	11.61
High	2478	11.59

9.5.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	11.62	11.58	14.61
Middle	2441	11.69	11.65	14.68
High	2478	11.58	11.55	14.58

9.5.3. HIGH POWER HDR (HDR8)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.64
Middle	2441	11.71
High	2478	11.61

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.70
Middle	2441	11.75
High	2478	11.73

9.5.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	11.64	11.64	14.65
Middle	2441	11.70	11.71	14.72
High	2478	11.62	11.62	14.63

9.5.5. LOW POWER HDR (HDR4)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.11
Middle	2441	6.18
High	2478	6.22

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.19
Middle	2441	6.21
High	2478	6.24

9.5.6. LOW POWER HDR TXBF (HDR4)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	6.23	6.22	9.24
Middle	2441	6.26	6.30	9.29
High	2478	6.19	6.20	9.21

9.5.7. LOW POWER HDR (HDR8)

ANT 4

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.22
Middle	2441	6.29
High	2478	6.19

ANT 3

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	6.23
Middle	2441	6.28
High	2478	6.25

9.5.8. LOW POWER HDR TXBF (HDR8)

Tested By:	39472
Date:	9/2/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	6.19	6.29	9.25
Middle	2441	6.23	6.31	9.28
High	2478	6.25	6.27	9.27

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.6.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.496	8	-12.50
Middle	2441	-4.369	8	-12.37
High	2478	-4.727	8	-12.73

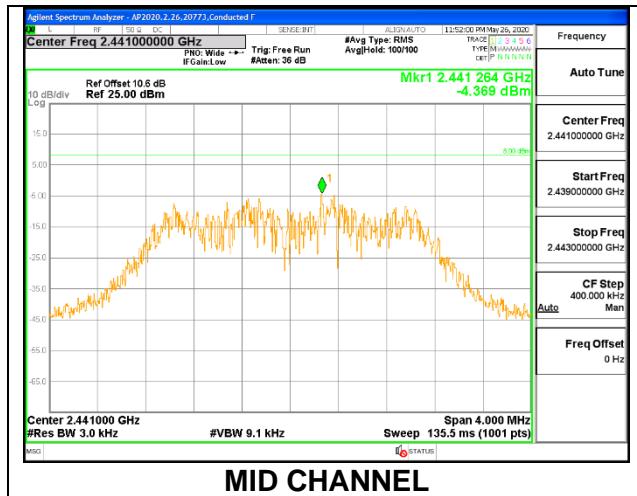

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.743	8	-12.74
Middle	2441	-4.651	8	-12.65
High	2478	-4.769	8	-12.77

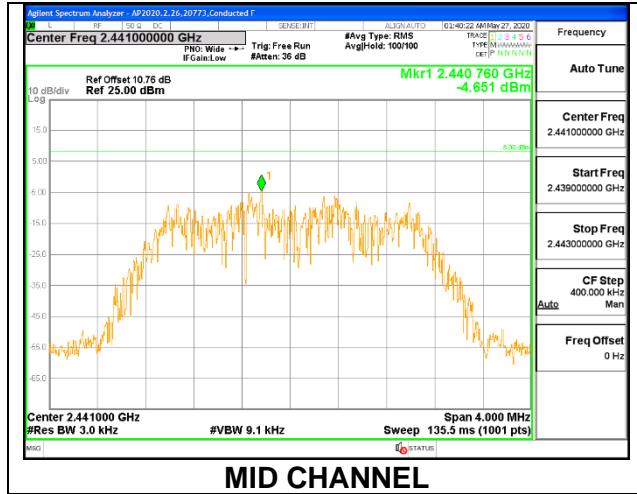


9.6.2. HIGH POWER HDR TXBF (HDR4)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results


Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-4.515	-4.811	-1.65	8.0	-9.7
Mid	2441	-4.746	-4.778	-1.75	8.0	-9.8
High	2478	-4.733	-4.942	-1.83	8.0	-9.8

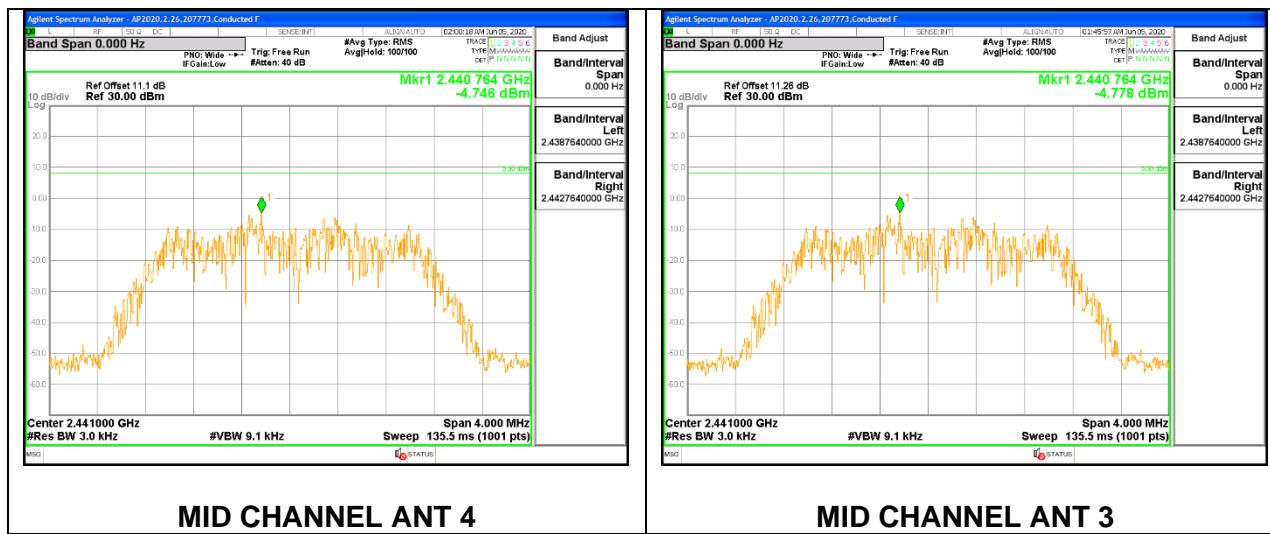

9.6.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-7.401	8	-15.40
Middle	2441	-7.477	8	-15.48
High	2478	-7.251	8	-15.25

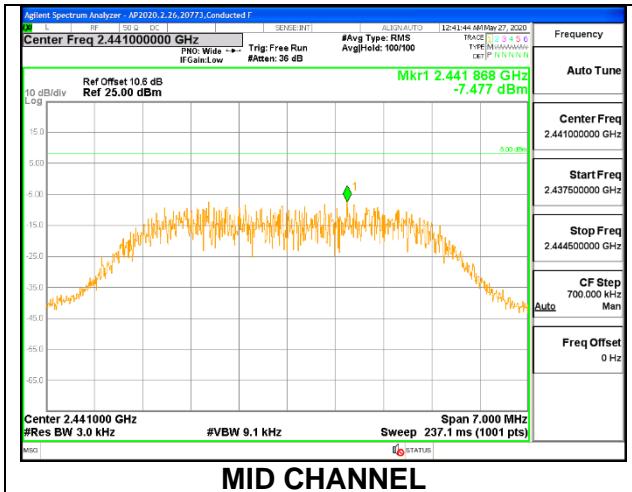

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-7.389	8	-15.39
Middle	2441	-7.188	8	-15.19
High	2478	-7.114	8	-15.11

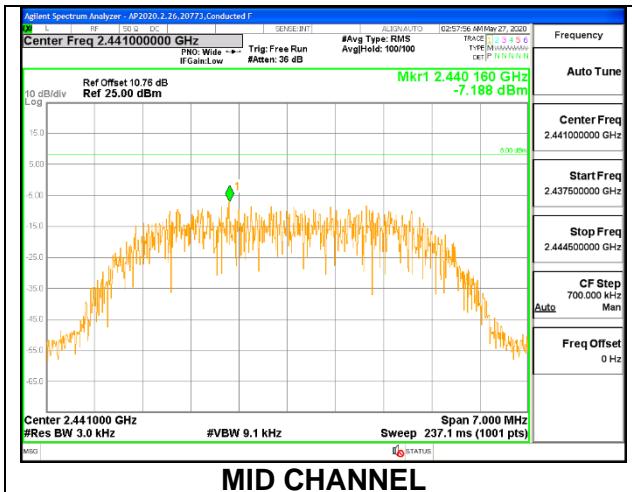


9.6.4. HIGH POWER HDR TXBF (HDR8)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results


Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-7.508	-7.319	-4.40	8.0	-12.4
Mid	2441	-7.559	-7.363	-4.45	8.0	-12.4
High	2478	-7.492	-7.363	-4.42	8.0	-12.4

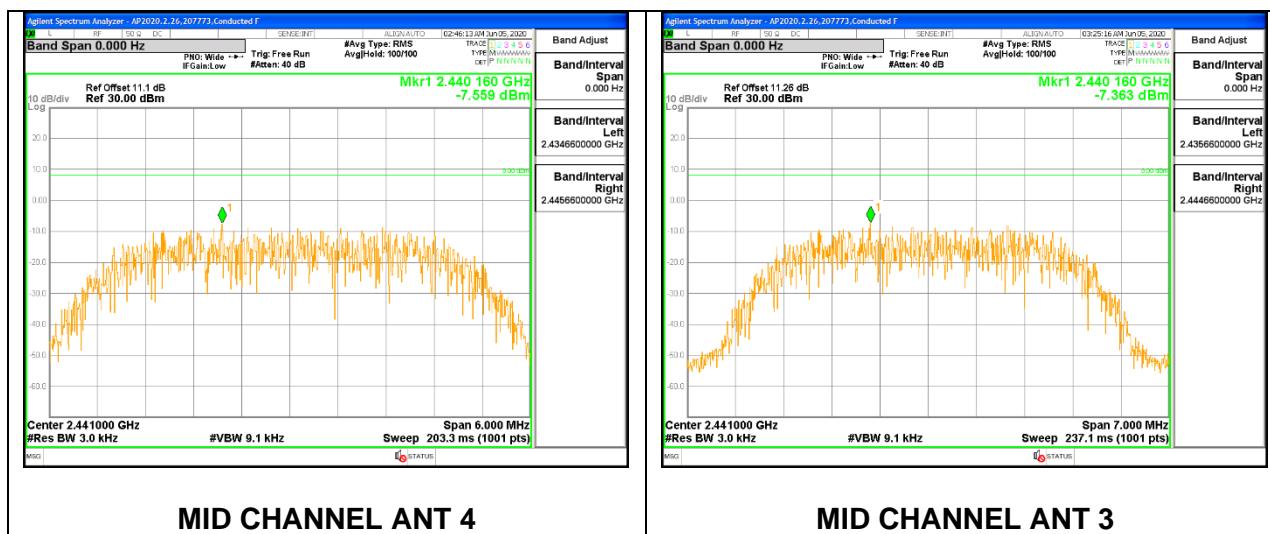

9.6.5. LOW POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-10.238	8	-18.24
Middle	2441	-9.936	8	-17.94
High	2478	-10.160	8	-18.16

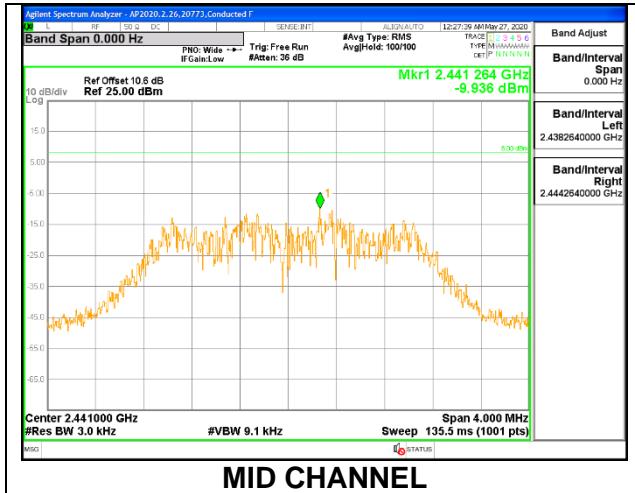

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-9.954	8	-17.95
Middle	2441	-9.785	8	-17.79
High	2478	-10.074	8	-18.07

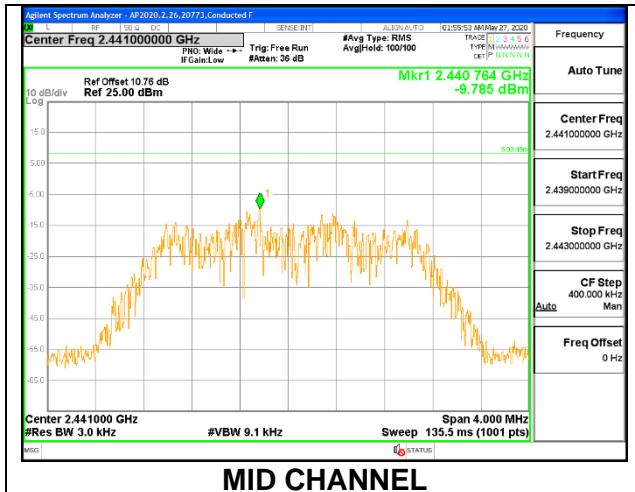


9.6.6. LOW POWER HDR TXBF (HDR4)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results


Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-10.179	-10.234	-7.20	8.0	-15.2
Mid	2441	-10.030	-10.238	-7.12	8.0	-15.1
High	2478	-10.199	-10.133	-7.16	8.0	-15.2

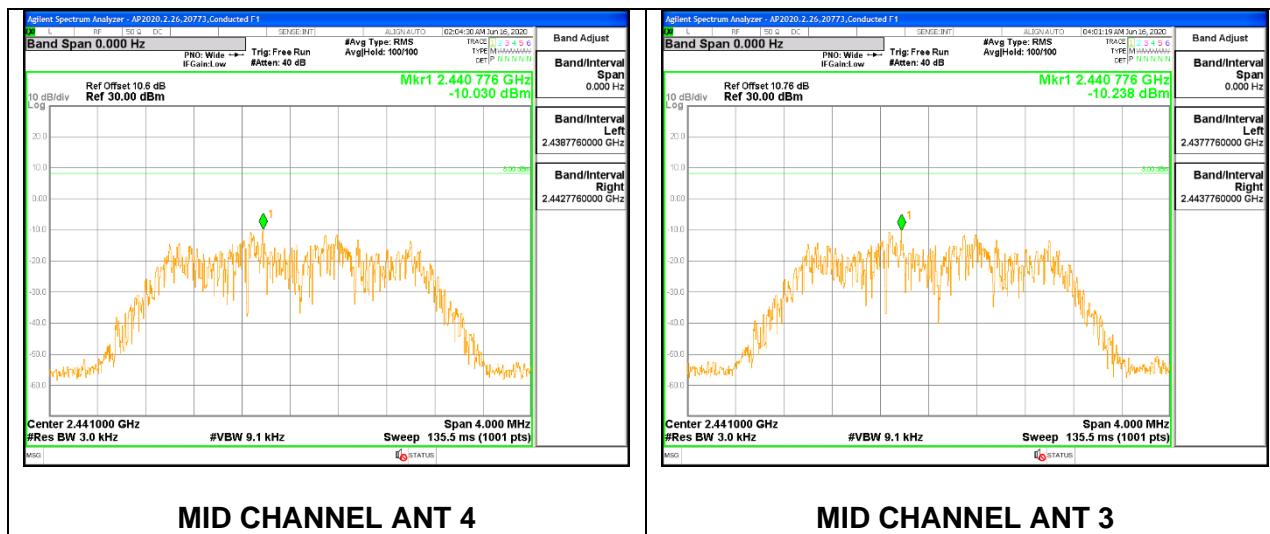

9.6.7. LOW POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-12.625	8	-20.63
Middle	2441	-12.362	8	-20.36
High	2478	-12.559	8	-20.56

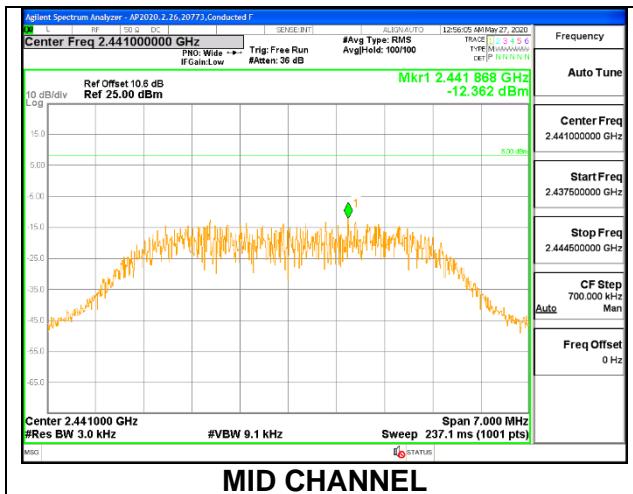

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-13.116	8	-21.12
Middle	2441	-12.957	8	-20.96
High	2478	-12.824	8	-20.82

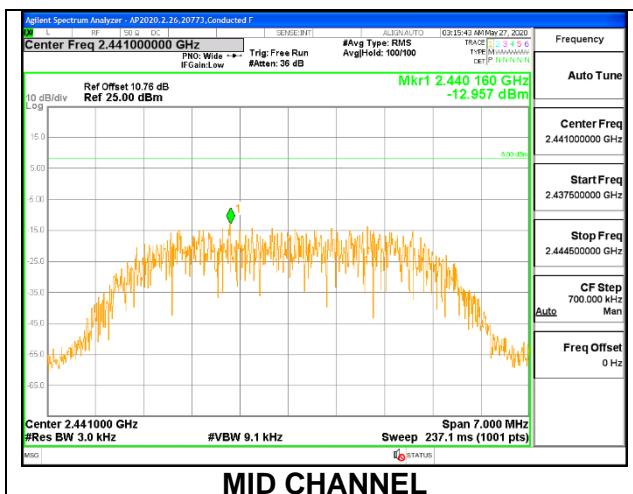


9.6.8. LOW POWER HDR TXBF (HDR8)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-13.005	-13.412	-10.19	8.0	-18.2
Mid	2441	-12.941	-13.001	-9.96	8.0	-18.0
High	2478	-12.693	-13.022	-9.84	8.0	-17.8

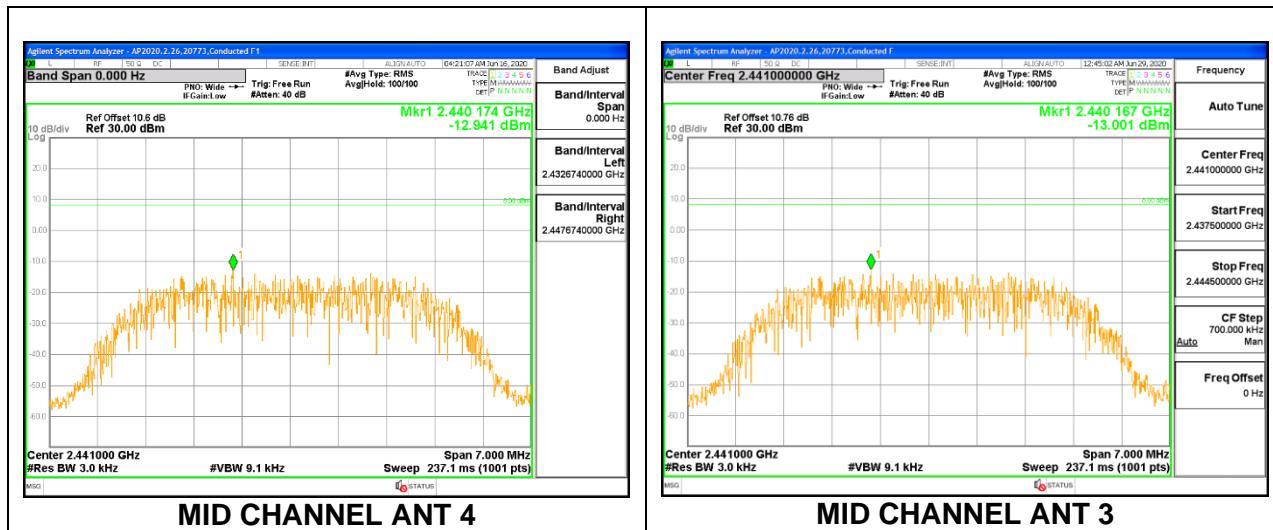

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, the required attenuation is 20 dB; therefore, spurious emissions are required to be 20dBc.

RESULTS

9.7.1. HIGH POWER HDR (HDR4)


ANT 4

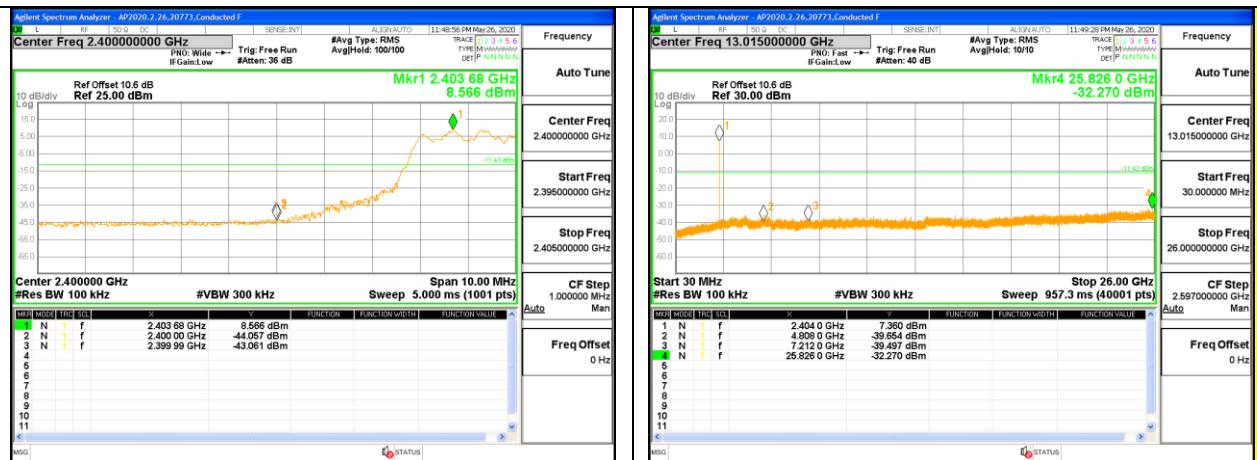

LOW CHANNEL BANDEDGE




IN-BAND REFERENCE LEVEL

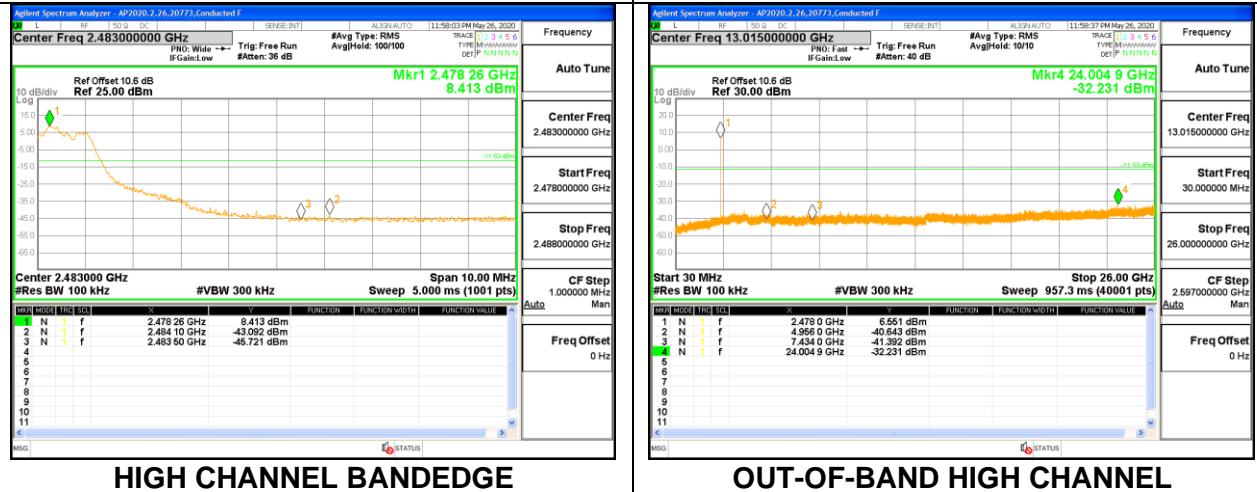


HIGH CHANNEL BANDEDGE

OUT-OF-BAND LOW CHANNEL

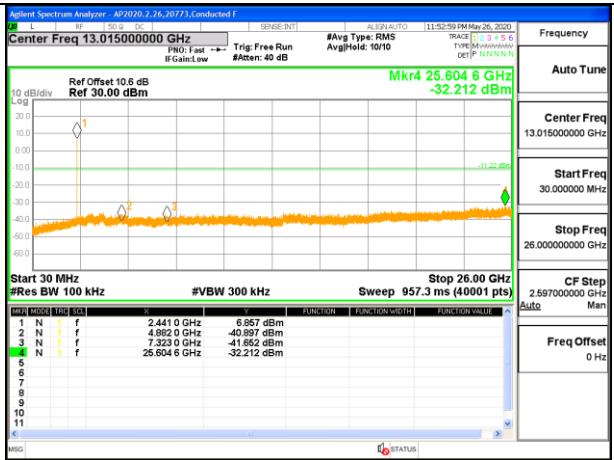

OUT-OF-BAND MID CHANNEL

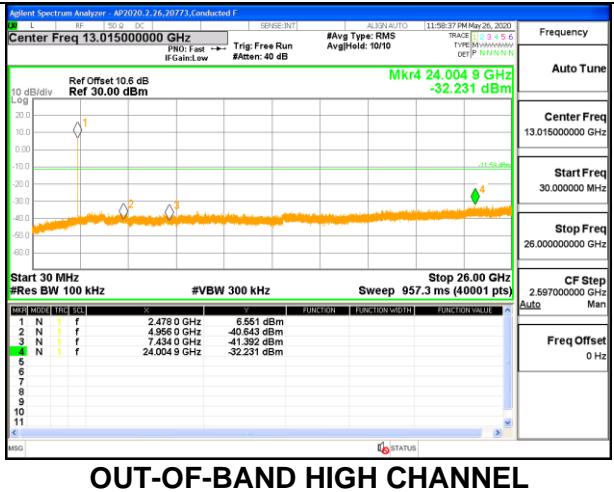


OUT-OF-BAND HIGH CHANNEL


ANT 3



LOW CHANNEL BANDEDGE

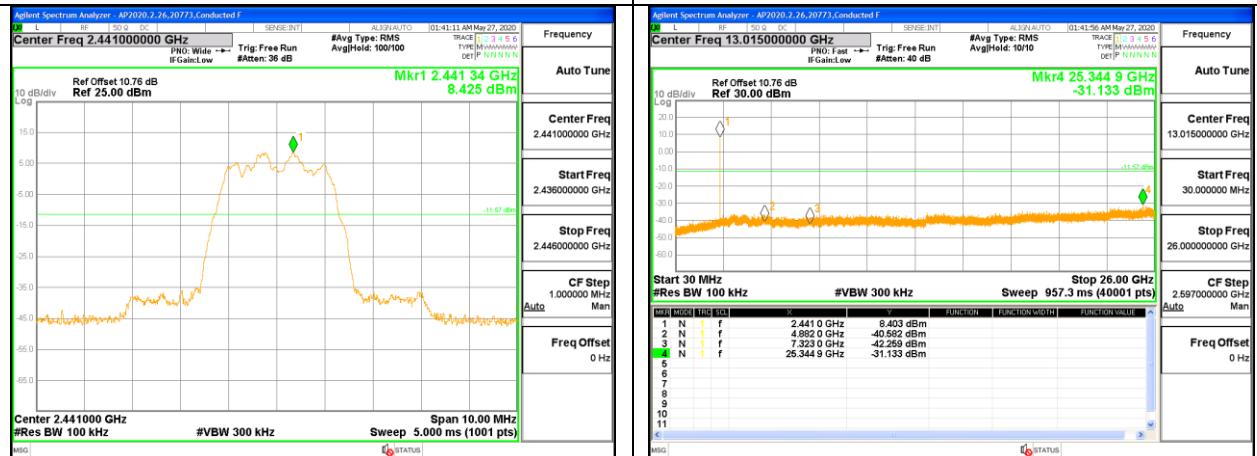


IN-BAND REFERENCE LEVEL

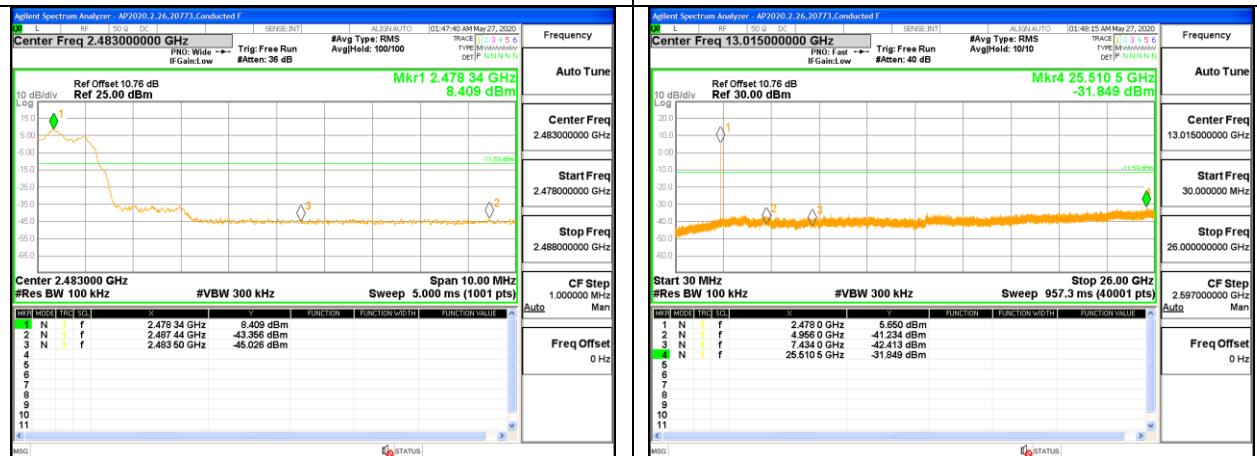


HIGH CHANNEL BANDEDGE

OUT-OF-BAND LOW CHANNEL

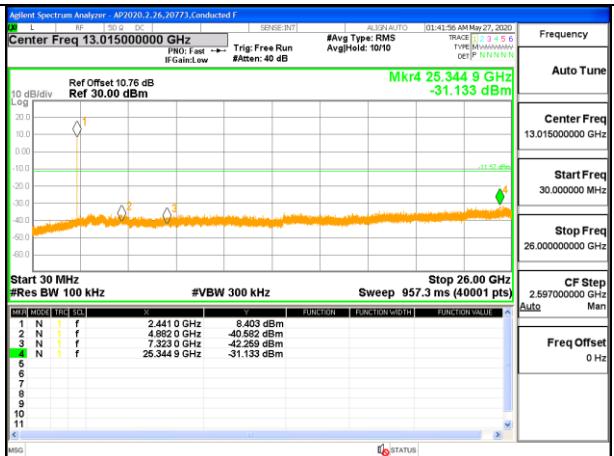


OUT-OF-BAND MID CHANNEL

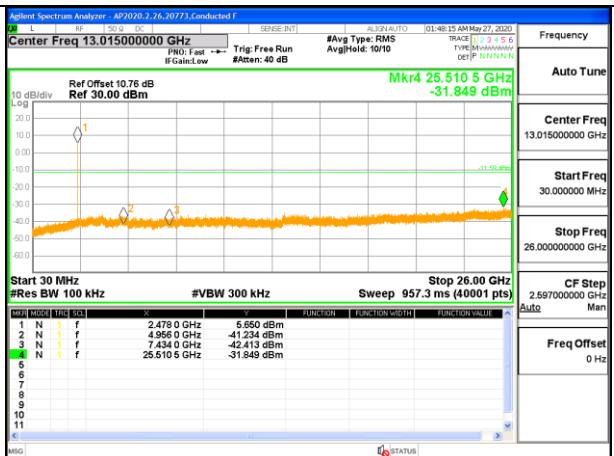

OUT-OF-BAND HIGH CHANNEL

9.7.2. HIGH POWER HDR TXBF (HDR4)


ANT 4

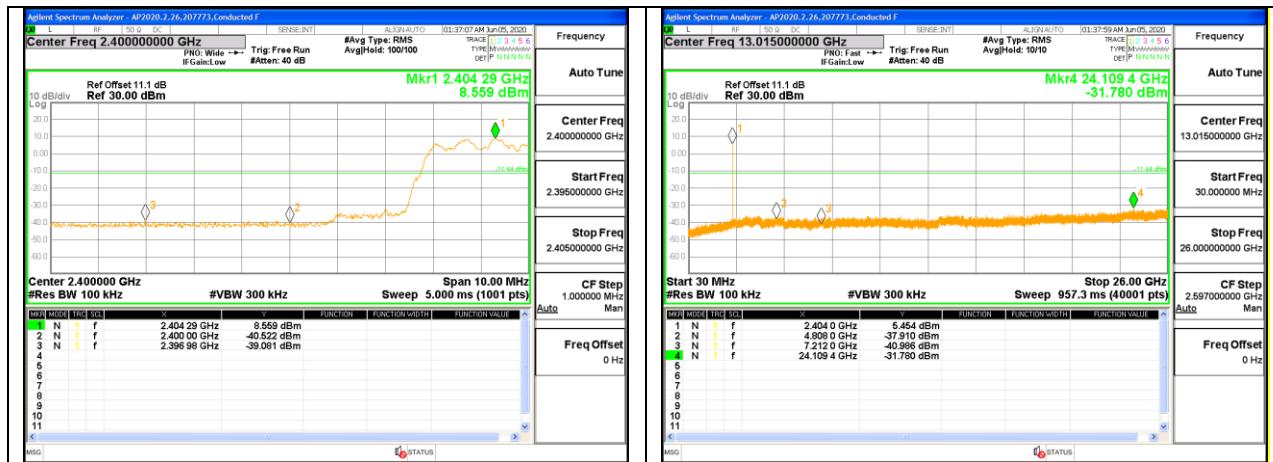


LOW CHANNEL BANDEDGE ANT 4




OUT-OF-BAND LOW CHANNEL ANT 4

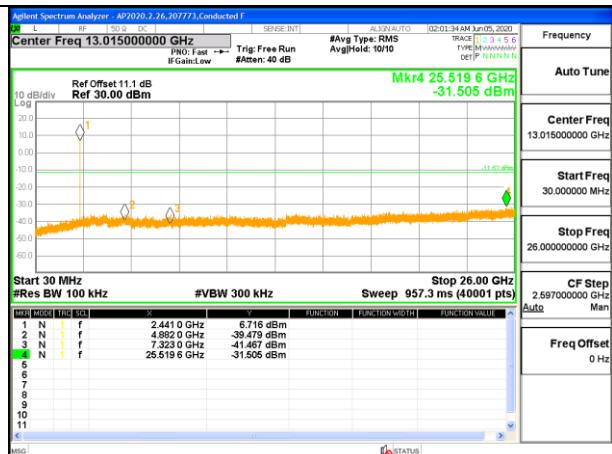

IN-BAND REFERENCE LEVEL ANT 4

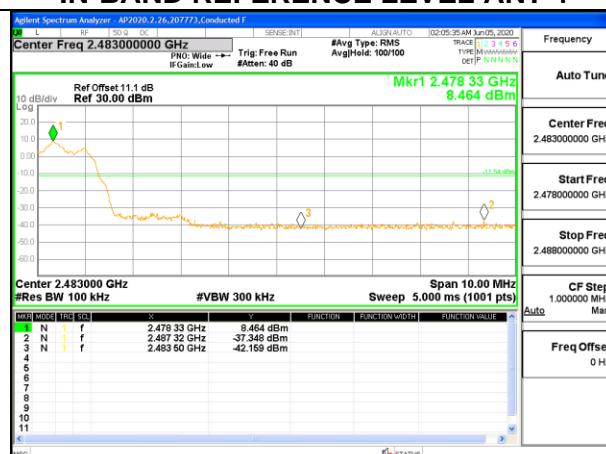


OUT-OF-BAND MID CHANNEL ANT 4

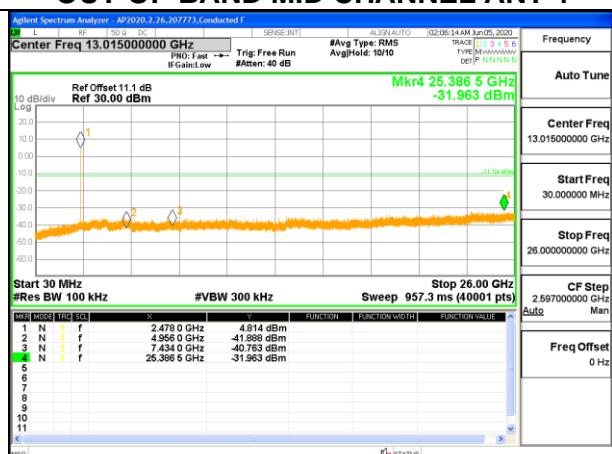


HIGH CHANNEL BANDEDGE ANT 4

OUT-OF-BAND HIGH CHANNEL ANT 4


ANT 3

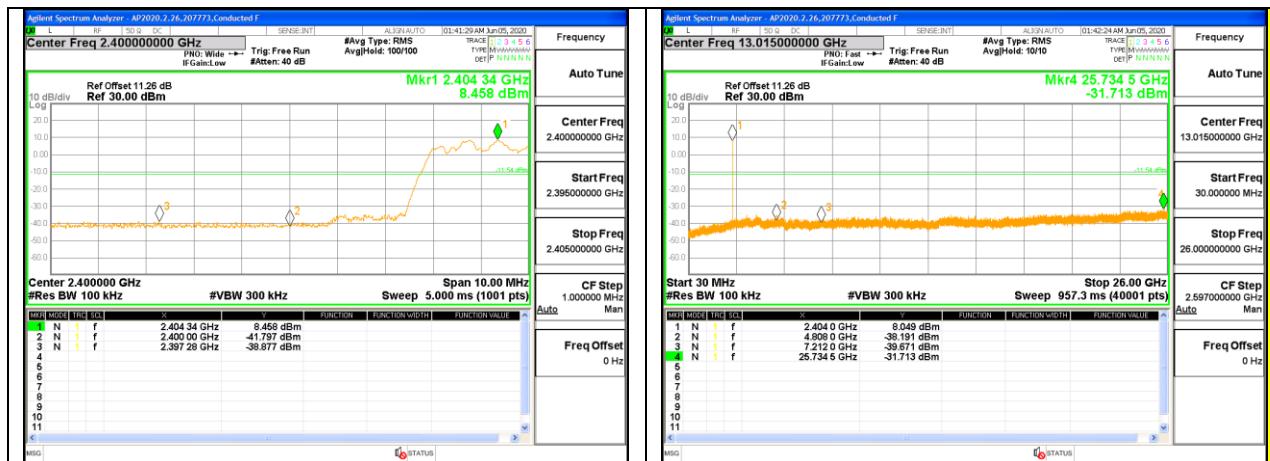

LOW CHANNEL BANDEDGE ANT 3

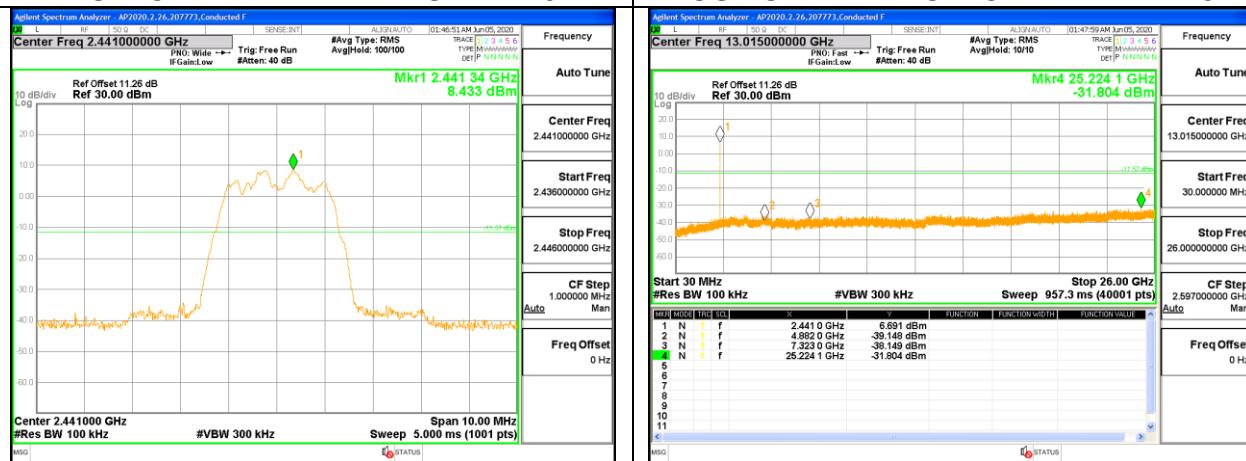


IN-BAND REFERENCE LEVEL ANT 3

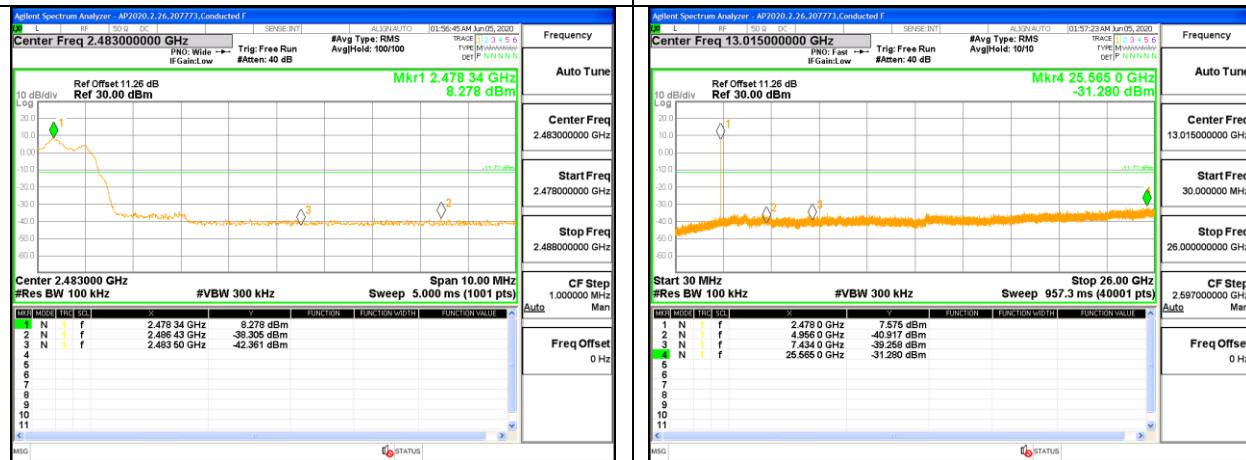


HIGH CHANNEL BANDEDGE ANT 3

OUT-OF-BAND LOW CHANNEL ANT 3

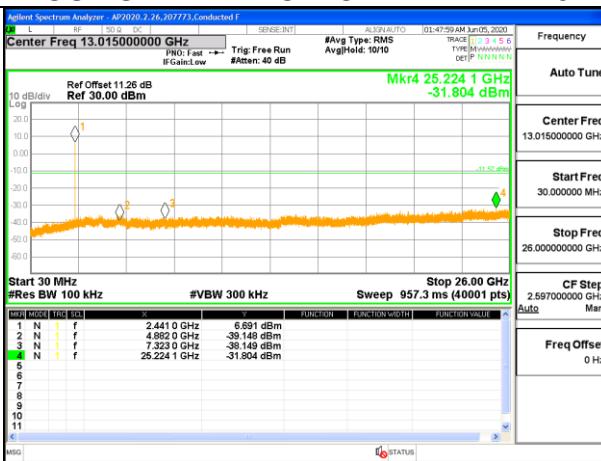



OUT-OF-BAND MID CHANNEL ANT 3

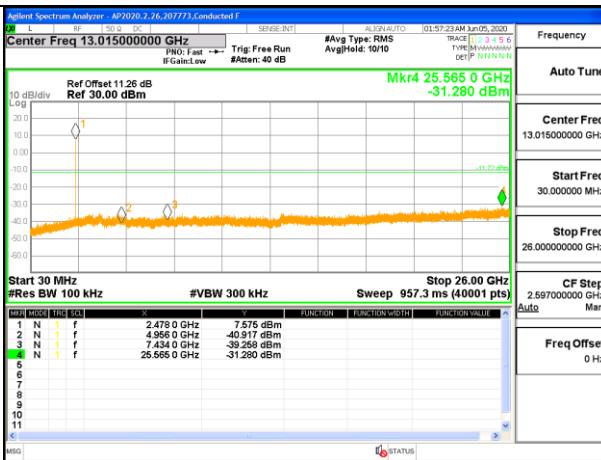

OUT-OF-BAND HIGH CHANNEL ANT 3

9.7.3. HIGH POWER HDR (HDR8)


ANT 4

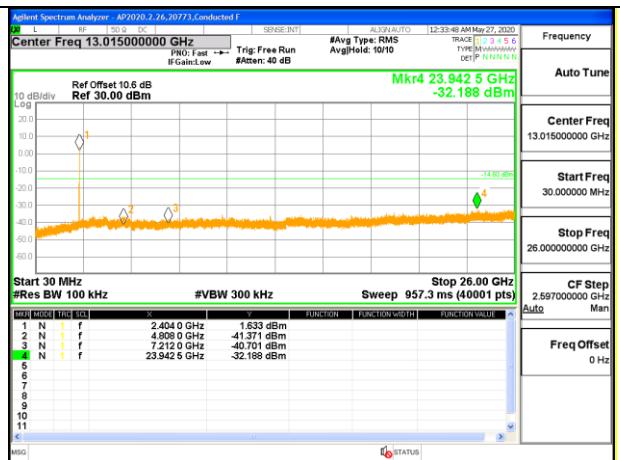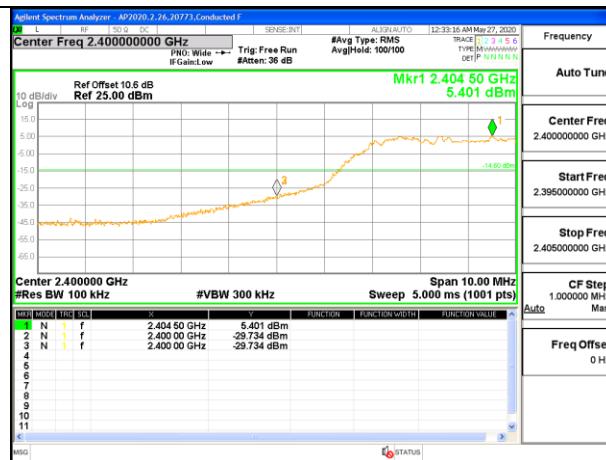


LOW CHANNEL BANDEDGE




OUT-OF-BAND LOW CHANNEL

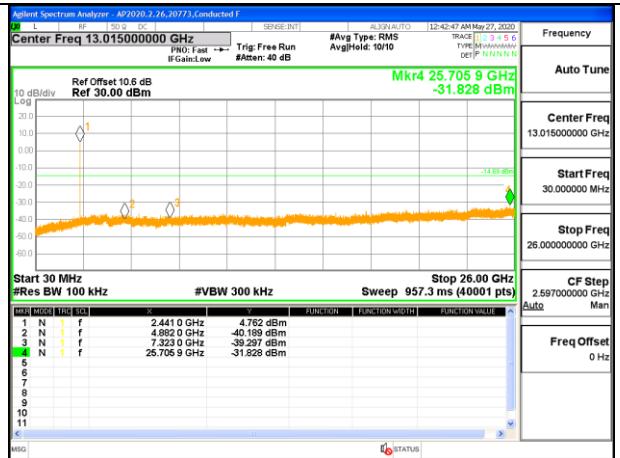

IN-BAND REFERENCE LEVEL

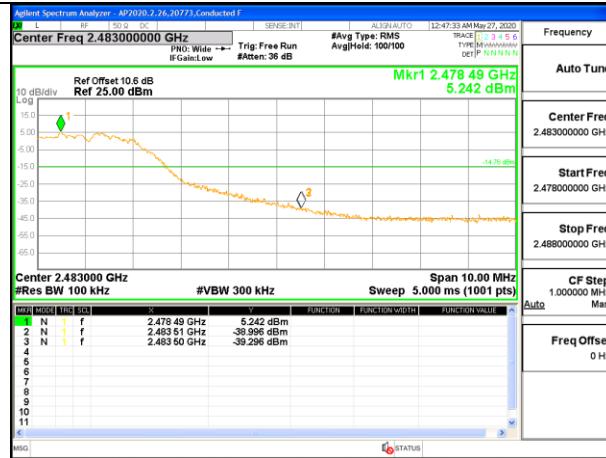

OUT-OF-BAND MID CHANNEL

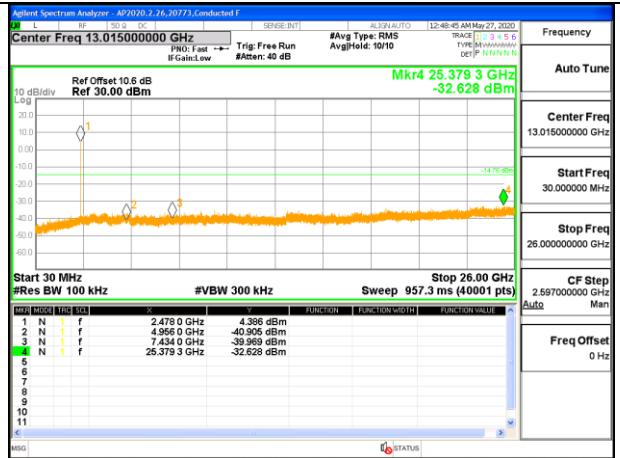

HIGH CHANNEL BANDEDGE

OUT-OF-BAND HIGH CHANNEL