



Part 1: Test Under Static Transmission Scenario

For
SMARTPHONE

FCC ID: BCG-E4003A
Model Name: A2484

Report Number: 13573771-S4V3
Issue Date: 8/6/2021

Prepared for
APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Date	Revisions	Revised By
V1	8/4/2021	Initial Issue	--
V2	8/5/2021	Table 4.1 – Corrected Ant 3 LTE B66 Hotspot and body worn entries	Dave Weaver
V3	8/6/2021	Updated Tables 3-1 and 4-3 with the correct bandwidths.	

Table of Contents

1.	Introduction	5
2.	Measurement Setup and General Information	6
2.1.	Test Environment	6
2.2.	Power Density Measurement System	6
2.2.1.	Power Density Probe	6
2.2.2.	Power Density Measurement System Verification	6
3.	Test Condition, Configuration, and Assessment	10
3.1.	Qualcomm Smart Transmit Parameters	10
3.1.1.	Qualcomm Smart Transmit Parameters for the Sub-6 Modem	10
3.1.2.	Qualcomm Smart Transmit parameters for the 5G modem	10
3.2.	Device Test Configuration for SAR Measurements	10
3.3.	Device Test Configuration for PD Measurements	11
4.	Summary of Results	14
4.1.	SAR Measurement and Conducted Power Results at P_{limit}	14
4.2.	PD Measurement Results at input.power.limit	18
4.3.	Simultaneous Transmission Analysis	24
4.3.1.	Analysis	24
4.3.2.	Simultaneous Transmission Compliance Demonstration for Sub-6 GHz WWAN + WLAN	26
4.3.3.	Simultaneous Transmission Compliance Demonstration for 5G mmW NR WWAN + WLAN	26
5.	Conclusions	30
Appendices		30
A.	mmW Probe Certificate	30
B.	Verification Source Certificate	30

Figures

Figure 2-1: 4 cm ² PD for source validation on 6/22/2021	8
Figure 2-2: 4 cm ² PD for source validation on 6/27/2021	9
Figure 3-1: EUT surface definition (S1=Front, S2=Rear, S3=Edge 4, S4=Edge 2, S5=Edge 1, S6=Edge 3)	13
Figure 4-1: Band n258, beam ID 36, 4 cm ² PD, Edge Right	21
Figure 4-2: Band n260, beam ID 34, 4 cm ² PD, Edge Right	22
Figure 4-3: Band n261, beam ID 41, 4 cm ² PD, Edge Right	23

Tables

Table 2-1: System Validation Results for SAR 1	7
Table 2-2: System Validation Results for SAR 3	7
Table 2-3: System Check Results	7
Table 3-1: PD verification test cases for n258	11
Table 3-2: PD verification test cases for n260	12
Table 3-3: PD verification test cases for n261	12
Table 4-1: Comparison of P_{limit} and P_{max}	14
Table 4-2: Worst-case reported WLAN SAR	17
Table 4-3: PD Measurement results for n258	18
Table 4-4: PD Measurement results for 260	19
Table 4-5: PD Measurement results for 261	20
Table 4-6: Worst-case time-averaged RF exposure for WWAN	24
Table 4-7: Simultaneous transmission analysis scenarios for 5G mmW NR WWAN + WLAN	26
Table 4-8: 5G mmW NR Simulation PD Surface Ratio n258	27
Table 4-9: 5G mmW NR Simulation PD Surface Ratio n260	27

Table 4-10: 5G mmW NR Simulation PD Surface Ratio n261	27
Table 4-11: Head TER for Worst-Case WLAN + 5G mmW NR n258	28
Table 4-12: Head TER for Worst-Case WLAN + 5G mmW NR n260	28
Table 4-13: Head TER for Worst-Case WLAN + 5G mmW NR n261	28
Table 4-14: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n258	28
Table 4-15: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n260	29
Table 4-16: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n261	29
Table 5-1: Reported RF exposure level	30

1. Introduction

The equipment under test (EUT) contains the Qualcomm modem supporting 2G/3G/4G/5G technologies and mmW 5G NR bands. Both WWAN modems are enabled with Qualcomm's Smart Transmit feature with algorithms to control and manage transmitting power in real time and to ensure the time-averaged RF exposure from the WWAN modems are always in compliance with FCC requirements.

In addition to these WWAN modems, the EUT contains a different modem to support WLAN.

The purpose of this Part 1 report is to demonstrate that this EUT complies with FCC RF exposure limits at maximum time-averaged transmit power limits for WWAN technologies, and at maximum transmit power limits for WLAN technologies. The specifics of this report are as listed:

- SAR and power density (PD) compliance for all WWAN radios (Sub-6 GHz + 5G mmW NR) is assessed based on maximum time-averaged transmit power (static transmission condition). Relevant FCC KDBs and exclusion criteria are applied on a time-average power basis for WWAN technologies. The maximum time-averaged transmit power limits for supported WWAN technologies, bands, and antennas in this report are derived in the Part 0 report. The validation of the Qualcomm's Smart Transmit time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in the Part 2 report.
- SAR compliance for WLAN radios is assessed based on maximum transmit power as per relevant FCC KDBs.
- Demonstrated compliance in simultaneous transmission scenarios involving both WWAN and WLAN transmissions, where WWAN exposure is assessed based on time-averaged transmit power limits, and WLAN exposure is assessed based on maximum transmit power limits.

By following the above steps, this report demonstrates that this EUT complies with FCC RF exposure limits for FCC equipment authorization.

The P_{limit} and *input.power.limit* used in this report are determined and listed in the Part 0 report.

Refer to Compliance Summary report for product description and terminology used in this report.

2. Measurement Setup and General Information

The SAR measurement are recorded in UL's *FCC SAR Test Report* (Report No. 13573771-S1).

This section provides the details of the test setup used for PD measurement.

2.1. Test Environment

Test Location	UL Verification Services
Ambient Temperature	22±2°C

2.2. Power Density Measurement System

The power density measurement system is constructed based on the DASY6 platform by SPEAG. The DASY6 with EUMmWv2 and 5G software module can measure the electromagnetic exposure (electromagnetic and power density) up to 110GHz as close as 2mm from any transmitter.

2.2.1. Power Density Probe

The novel EUMmWV3 & EUMmWV4 probe is used in the power density measurement. It is designed for precise near-field measurements in the mm-wave range by Schmid & Partner Engineering AG of Zurich, Switzerland. The specifications are:

- Frequency range: 0.75 ~ 110 GHz
- Dynamic range: <50 – 3000 V/m (up to 10000 V/m with additional PRE-10 voltage divider)
- Linearity: < ± 0.2 dB
- Supports sensor model calibration (SMC)
- ISO17025 accredited calibration

2.2.2. Power Density Measurement System Verification

The power density system verification is performed using the SPEAG verification device. It consists of a ka-band horn antenna with a corresponding gun oscillator packaged within a cube-shaped housing.

The specification of the verification device is:

- Calibrated frequency: 30 GHz at 10 mm from the case surface
- Frequency accuracy: ± 100 MHz
- E-field polarization: linear
- Harmonics: -20 dBc (typ)
- Total radiated power: 14 dBm (typ)
- Power stability: 0.05 dB
- Power consumption: 5 W (max)
- Size: 100 × 100 × 100 mm
- Weight: 1 kg

Tables 2-1 and 2-2 show the verification test results. The measured power density (PD) value is within ±10% of target level; for the 5G verification source's uncertainty, please refer to Appendix B.

Table 2-1: System Validation Results for SAR 1

SAR Lab	Date	Frequency (GHz)	5G Verification Probe SN	Probe Cal. Due Data	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm ²) over 4cm ²	Target _n (Ref. Value)	Deviation (dB)	Result Total power (mW/cm ²) over 4cm ²	Target _{Tot} (Ref. Value)	Deviation (dB)
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	39.4	33.5	0.70	39.9	33.9	0.71
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	40.2	33.5	0.79	40.6	33.9	0.78
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	40.5	33.5	0.82	40.9	33.9	0.82
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.8	33.5	0.86	41.2	33.9	0.85
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.9	33.5	0.87	41.3	33.9	0.86
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.3	33.5	0.80	40.7	33.9	0.79
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	39.3	33.5	0.69	39.6	33.9	0.67
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	39	33.5	0.66	39.4	33.9	0.65
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	38.5	33.5	0.60	38.9	33.9	0.60
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	38.1	33.5	0.56	38.5	33.9	0.55
Average							39.7		Average	40.1		

Table 2-2: System Validation Results for SAR 3

SAR Lab	Date	Frequency (GHz)	5G Verification Probe SN	Probe Cal. Due Data	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm ²) over 4cm ²	Target _n (Ref. Value)	Deviation (dB)	Result Total power (mW/cm ²) over 4cm ²	Target _{Tot} (Ref. Value)	Deviation (dB)
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	30.7	33.5	-0.38	32.2	33.9	-0.22
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	31.2	33.5	-0.31	32.4	33.9	-0.20
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	31.7	33.5	-0.24	33	33.9	-0.12
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	32.0	33.5	-0.20	33.2	33.9	-0.09
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	32.2	33.5	-0.17	33.3	33.9	-0.08
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.9	33.5	-0.21	33	33.9	-0.12
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.9	33.5	-0.21	33	33.9	-0.12
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.6	33.5	-0.25	32.8	33.9	-0.14
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.5	33.5	-0.27	32.7	33.9	-0.16
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.2	33.5	-0.31	32.3	33.9	-0.21
Average							31.6		Average	32.8		

Table 2-3: System Check Results

SAR Lab	Date	Frequency (GHz)	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm ²) over 4cm ²	Target _n (Ref. Value)	Delta ±10 %	Result Total power (mW/cm ²) over 4cm ²	Target _{Tot} (Ref. Value)	Delta ±10 %
SAR 1	6/3/2021	30	1003	11/13/2021	37.8	39.7	-5%	38.2	40.1	-5%
SAR 1	6/7/2021	30	1003	11/13/2021	39.2	39.7	-1%	39.8	40.1	-1%
SAR 1	6/11/2021	30	1003	11/13/2021	42	39.7	6%	42.4	40.1	6%
SAR 1	6/15/2021	30	1003	11/13/2021	43	39.7	8%	43.3	40.1	8%
SAR 1	6/19/2021	30	1003	11/13/2021	40.2	39.7	1%	40.8	40.1	2%
SAR 1	6/22/2021	30	1003	11/13/2021	43.3	39.7	9%	43.7	40.1	9%
SAR Lab	Date	Frequency (GHz)	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm ²) over 4cm ²	Target _n (Ref. Value)	Delta ±10 %	Result Total power (mW/cm ²) over 4cm ²	Target _{Tot} (Ref. Value)	Delta ±10 %
SAR 3	6/21/2021	30	1003	11/13/2021	32.9	31.6	4%	35.1	32.8	7%
SAR 3	6/27/2021	30	1003	11/13/2021	33	31.6	4%	33.4	32.8	2%

SAR 1:
Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
, 5G Verification Source - 30GHz	100.0 x 100.0 x 100.0	1003	Phone

Exposure Conditions

Phantom Section	Position, Distance [mm]	Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 5.55		Validation band	CW, 0--	30000.0, 30000	1.0

Scan Setup

Medium	Probe, Calibration Date	DAE, Calibration Date
--Air-	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

Scan Setup

Grid Extents [mm]
Grid Steps [lambda]
Sensor Surface [mm]
MAIA

5G Scan
60.0 x 60.0
0.25 x 0.25
5.55
N/A

Measurement Results

Date
Avg. Area [cm²]
pS _{tot} avg [W/m²]
pS _n avg [W/m²]
E _{peak} [V/m]
Power Drift [dB]

5G Scan
2021-06-22, 01:16
4.00
43.7
43.3
145
-0.01

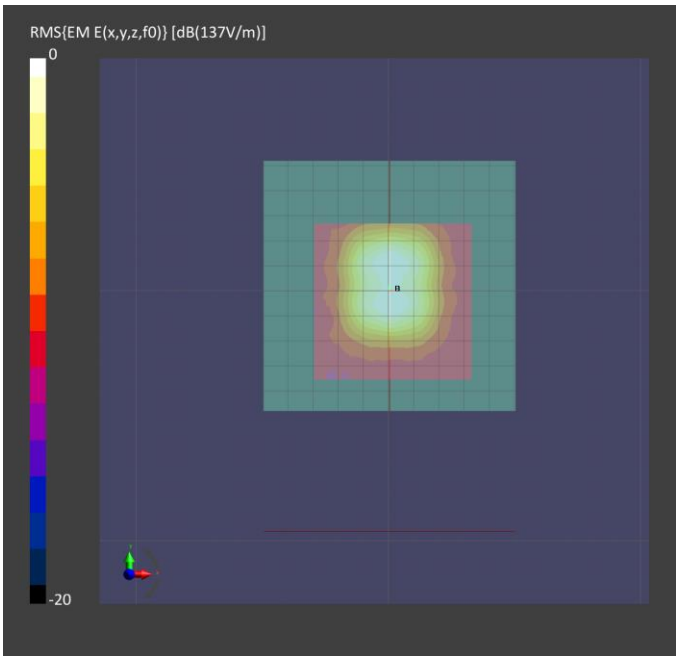


Figure 2-1: 4 cm² PD for source validation on 6/22/2021

SAR 3:**Device under Test Properties**

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
, 5G Verification Source - 30GHz	100.0 x 100.0 x 100.0	1003	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G -	FRONT, 5.55	Validation band	CW, 0--	30000.0, 30000	1.0

Hardware Setup

Medium	Probe, Calibration Date	DAE, Calibration Date	
--Air--	EUmmWV4 - SN9496_F1-78GHz, 2021-02-26	DAE4 Sn1548, 2021-02-22	


Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55
MAIA	N/A

Measurement Results

	5G Scan
Date	2021-06-27, 23:23
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	33.0
psPDtot+ [W/m ²]	33.4
psPDmod+ [W/m ²]	33.7
E _{max} [V/m]	132
Power Drift [dB]	0.21

--	--

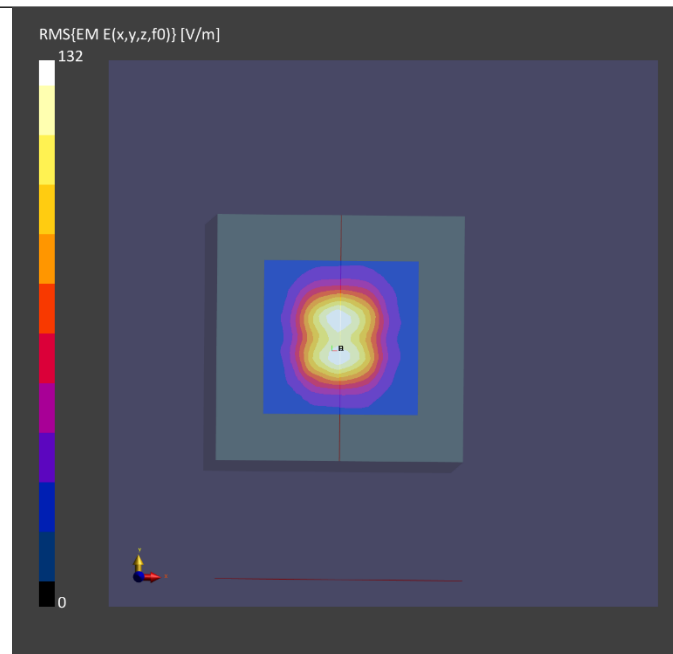**Figure 2-2: 4 cm² PD for source validation on 6/27/2021**

3. Test Condition, Configuration, and Assessment

3.1. Qualcomm Smart Transmit Parameters

The input parameters described in §2.3 of the Compliance Summary report are required for functionality of Qualcomm's Smart Transmit algorithm.

These parameters are entered through the *Embedded File System* (EFS) and cannot be accessed by the end-user.

The Part 0 report documents the determination of P_{limit} for Sub-6 GHz WWAN bands (Part 0, §2.4) and the *input.power.limit* for 5G mmW NR bands using the design targets (Part 0, §3.7), and device related uncertainty listed below:

Total Uncertainty (dB)	SAR _{Design Target} (1-g W/kg)	SAR _{Design Target} (10-g W/kg)	SAR _{Design Limit} (1-g W/kg)	SAR _{Design Limit} (10-g W/kg)
1.00	0.8	2.0	1.0	2.5

Total Uncertainty (dB)	PD _{Design Target} (W/m ²)
2.20	6.0

3.1.1. Qualcomm Smart Transmit Parameters for the Sub-6 Modem

For this EUT, the input parameters listed in §2.3 of the Part 0 report are populated via the EFS entry.

3.1.2. Qualcomm Smart Transmit parameters for the 5G modem

For this EUT, the *input.power.limit* parameters for the 5G mmW NR radio(s) are listed in §3.7.3 of the Part 0 report and are populated via EFS entry into the EUT.

3.2. Device Test Configuration for SAR Measurements

In summary, SAR is evaluated on this EUT in test configurations and test conditions listed below:

- Test configurations: Hotspot SAR exposure (1-g SAR) from all device surfaces/edges (front, back, left, right, top, bottom) having a transmitting antenna located $\leq 25\text{mm}$ from that device surface/edge when in direct contact with flat section of SAM phantom. Hotspot SAR is evaluated at 5mm separation distance for all selected device surfaces as per FCC KDB publication 648474 D04.
- Test condition: The SAR measurements on all supported Sub-6 WWAN technologies and bands are conducted with the EUT transmitting at maximum time-average transmit power (P_{limit}) or maximum RF tune-up power (P_{max}) if $P_{max} \leq P_{limit}$.

See UL's *FCC SAR Test Report* (Report No. 13573771-S1) for details

3.3. Device Test Configuration for PD Measurements

As can be seen in §3 of the Part 0 report, the PD exposure for this EUT has been assessed against the $PD_{Design\ Target}$ listed in §4.2 of this report using a validated simulation approach for the worst cases for all its beams. To further confirm the compliance, a subset of beams and test cases were selected for PD verification, see §4.2.

The following beam selection criteria for the PD verification test were used:

- Select one single beam (antenna array config) per polarization (vertical or horizontal) and per mmW antenna module
 - The single beam containing highest number of active antenna ports. For example, the single beam with 4 active patch ports should be selected over the beam with a single active patch port
- Select one beam per mmW antenna module
 - The beam pair containing the highest number of active antenna ports.

Additionally, since the worst-case surface dictates the compliance, the PD measurement is made on the worst channel and worst surface determined through the validated simulation approach, see Appendix B of the Part 0 report.

Based on the aforementioned criteria and the EUT codebook in §3.3 of the Part 0 report, Tables 3-1, 3-2, and 3-3 list the selected beams and test cases for PD verification measurement(s). The definition of the EUT surface is illustrated in Figure 3-1.

Table 3-1: PD verification test cases for n258

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M1	2016667	30		100	1	Back
	2016667	37	165	100	1	Back
	2042915		168	100	33	Back
	2042915		168	100	33	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M0	2042915	11		100	1	Back
	2042915	11	139	100	1	Back
	2042915		150	100	33	Back
	2042915		150	100	33	Left
	2042915		150	100	33	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M2	2069160		160	100	1	Right
	2069160	32	160	100	1	Right
	2069160	36		50	1	Right
	2069160	36		50	1	Back
	2069160	36		50	1	Front

Table 3-2: PD verification test cases for n260

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M1	2229167	38		100	1	Back
	2229167	30	158	100	1	Back
	2229167		167	100	33	Back
	2229167		167	100	33	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M0	2229167	23		100	1	Back
	2229167	22	150	100	1	Back
	2229167		139	100	66	Back
	2229167		139	100	66	Left
	2229167		139	100	66	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M2	2253330		164	100	1	Right
	2253330	42	170	100	1	Right
	2253330	34		100	1	Right
	2253330	34		100	1	Back
	2253330	34		100	1	Front

Table 3-3: PD verification test cases for n261

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M1	2070833	40		100	1	Back
	2070833	37	165	100	1	Back
	2070833		156	100	33	Back
	2070833		156	100	33	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M0	2070833	10		100	1	Back
	2070833		138	100	1	Back
	2083330	21	149	100	1	Back
	2083330	21	149	100	1	Left
	2083330	21	149	100	1	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
M2	2077084		164	100	1	Right
	2077084	44	172	100	1	Right
	2070833	41		50	1	Right
	2070833	41		50	1	Back
	2070833	41		50	1	Front

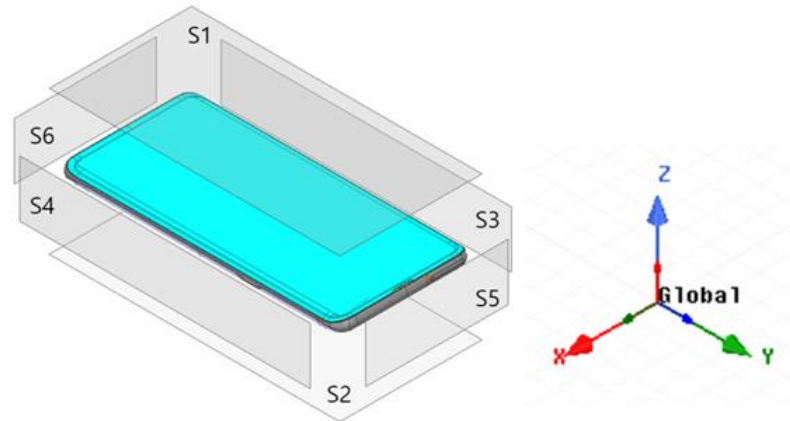


Figure 3-1: EUT surface definition (S1=Front, S2=Rear, S3=Edge 4, S4=Edge 2, S5=Edge 1, S6=Edge 3)

4. Summary of Results

4.1. SAR Measurement and Conducted Power Results at P_{limit}

The transmit power limit, P_{limit} , that corresponds to the $SAR_{\text{Design Target}}$, stated in §3.1 for all technologies and bands, was determined through the Part 0 report and are listed in EFS entries in §2.4 of the Part 0 report. For this EUT, the P_{max} (maximum RF tune-up power) for select Sub-6 GHz technologies is less than, or equal to, the corresponding P_{limit} , + tolerance, as summarized and shown in Table 4-1.

Table 4-1: Comparison of P_{limit} and P_{max}

Exposure Scenario		Duty Cycle	Head		Body-worn		Hotspot		P _{max} (dBm)
Spatial-average			1-g		1-g		1-g		
Test Distance			0 mm		5 mm		5 mm		
Power Mode (DSI)			DSI: 0		DSI: 1		DSI: 1		
Antenna	Tech/Band		P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	
Burst Average			Burst Average			Burst Average		Burst Average	
ANT1	GSM 850 2 slots	25.0%	42.07	32.50	33.54	31.00	33.54	31.00	32.50
	GSM 1900 2 slots	25.0%	35.49	31.00	29.47	27.80	28.04	27.80	31.00
	W-CDMA B2	100.0%	29.26	25.70	22.08	21.80	21.98	21.80	25.70
	W-CDMA B4	100.0%	31.16	25.70	20.54	19.30	19.50	19.30	25.70
	W-CDMA B5	100.0%	33.76	25.70	25.19	25.00	25.19	25.00	25.70
	CDMA BC0	100.0%	30.22	23.50	25.97	23.50	25.97	23.50	23.50
	CDMA BC1	100.0%	29.24	25.70	22.27	21.80	22.02	21.80	25.70
	CDMA BC10	100.0%	33.02	25.70	25.73	25.00	25.73	25.00	25.70
	LTEBand 5	100.0%	32.59	25.70	25.37	25.00	25.37	25.00	25.70
	LTEBand 7	100.0%	30.59	25.70	21.55	20.00	20.35	20.00	25.70
	LTEBand 12/17	100.0%	32.80	25.70	28.51	25.70	27.22	25.70	25.70
	LTE Band 13	100.0%	31.90	25.70	27.73	25.70	27.73	25.70	25.70
	LTE Band 14	100.0%	33.64	25.70	27.33	25.70	27.33	25.70	25.70
	LTE Band 25/2	100.0%	29.43	25.70	22.97	21.80	22.00	21.80	25.70
	LTE Band 26	100.0%	33.40	25.70	25.58	25.00	25.58	25.00	25.70
	LTE Band 30	100.0%	27.70	25.00	23.53	20.50	20.76	20.50	25.00
	LTE Band 41	63.3%	32.61	25.70	26.12	23.00	23.20	23.00	25.70
	LTE Band 66/4	100.0%	31.94	25.70	20.98	19.30	19.48	19.30	25.70
	LTE Band 71	100.0%	34.26	25.70	29.20	25.70	28.82	25.70	25.70
	NR n5	100.0%	34.54	25.70	26.98	25.00	26.98	25.00	25.70
	NR n7	100.0%	30.68	25.70	21.33	20.00	20.54	20.00	25.70
	NR n12	100.0%	35.17	25.70	30.02	25.70	29.57	25.70	25.70
	NR n25/2	100.0%	30.32	25.70	23.06	21.80	22.02	21.80	25.70
	NR n30	100.0%	28.21	25.00	23.35	20.50	20.90	20.50	25.00
	NR n41	63.3%	32.63	25.70	24.42	21.00	24.42	21.00	25.70
	NR n66	100.0%	33.35	25.70	21.30	19.30	19.50	19.30	25.70
	NR n71	100.0%	35.23	25.70	30.38	25.70	30.19	25.70	25.70

Exposure Scenario		Duty Cycle	Head		Body-worn		Hotspot		P _{max} (dBm)
Spatial-average			1-g		1-g		1-g		
Test Distance			0 mm		5 mm		5 mm		
Power Mode (DSI)			DSI: 0		DSI: 1		DSI: 1		
Antenna	Tech/Band		P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	
			Burst Average		Burst Average		Burst Average		Burst Average
ANT2	GSM 850 2 slots	25.0%	32.21	30.50	36.66	31.00	36.66	31.00	31.00
	GSM 1900 2 slots	25.0%	26.21	26.00	26.10	25.80	26.10	25.80	28.50
	W-CDMA B2	100.0%	20.21	20.00	20.59	19.80	20.33	19.80	23.70
	W-CDMA B4	100.0%	23.81	23.50	23.68	23.50	23.68	23.50	23.70
	W-CDMA B5	100.0%	24.71	24.50	27.67	24.70	27.67	24.70	24.70
	CDMA BC0	100.0%	23.22	23.00	26.66	23.00	26.66	23.00	23.00
	CDMA BC1	100.0%	20.36	20.00	20.29	19.80	20.29	19.80	23.70
	CDMA BC10	100.0%	25.12	24.50	28.99	24.70	28.99	24.70	24.70
	LTEBand 5	100.0%	24.89	24.50	25.57	24.70	25.57	24.70	24.70
	LTEBand 7	100.0%	19.74	19.50	19.97	19.50	19.87	19.50	23.20
	LTEBand 12/17	100.0%	25.45	24.70	28.01	24.70	28.01	24.70	24.70
	LTE Band 13	100.0%	25.25	24.70	27.22	24.70	27.22	24.70	24.70
	LTE Band 14	100.0%	24.99	24.70	27.31	24.70	27.31	24.70	24.70
	LTE Band 25/2	100.0%	20.23	20.00	20.13	19.80	20.13	19.80	23.70
	LTE Band 26	100.0%	24.83	24.50	28.51	24.70	28.51	24.70	24.70
	LTE Band 30	100.0%	19.11	18.80	21.27	21.00	21.27	21.00	23.20
	LTE Band 41	63.3%	20.48	20.30	21.89	21.50	21.89	21.50	25.00
	LTE Band 66/4	100.0%	23.69	23.50	24.06	23.50	24.06	23.50	23.70
	LTE Band 71	100.0%	25.54	24.70	27.75	24.70	27.75	24.70	24.70
	NR n5	100.0%	26.63	24.50	27.51	24.70	27.51	24.70	24.70
	NR n7	100.0%	20.51	19.50	21.44	19.50	21.14	19.50	23.20
	NR n12	100.0%	26.78	24.70	30.46	24.70	30.46	24.70	24.70
NR n25/2	100.0%	20.92	20.00	20.94	19.80	20.94	19.80	23.70	
NR n30	100.0%	19.81	18.80	21.59	21.00	21.59	21.00	23.20	
NR n41	63.3%	19.29	18.30	20.87	19.50	20.87	19.50	25.70	
NR n66	100.0%	24.43	23.50	24.54	23.50	24.54	23.50	23.70	
NR n71	100.0%	28.68	24.70	29.06	24.70	29.06	24.70	24.70	

Exposure Scenario		Duty Cycle	Head		Body-worn		Hotspot		P _{max} (dBm)
Spatial-average			1-g		1-g		1-g		
Test Distance			0 mm		5 mm		5 mm		
Power Mode (DSI)			DSI: 0		DSI: 1		DSI: 1		
Antenna	Tech/Band		P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	
			Burst Average		Burst Average		Burst Average		Burst Average
ANT3	GSM 1900 2 slots	25.0%	33.91	29.50	26.49	26.30	26.49	26.30	30.00
	W-CDMA B2	100.0%	26.59	24.00	20.50	20.30	20.50	20.30	25.20
	W-CDMA B4	100.0%	29.77	23.80	22.01	21.80	22.01	21.80	25.20
	LTE Band 7	100.0%	27.30	23.30	20.62	19.30	19.49	19.30	25.20
	LTE Band 25/2	100.0%	27.17	24.00	21.33	20.30	20.57	20.30	25.20
	LTE Band 30	100.0%	26.96	22.30	23.12	20.30	20.51	20.30	23.00
	LTE Band 41	63.3%	29.10	23.50	22.09	21.30	21.49	21.30	25.70
	LTE Band 66/4	100.0%	29.96	23.80	22.43	21.80	22.00	21.80	25.20
	NR n7	100.0%	27.33	23.30	20.60	19.30	20.60	19.30	25.20
	NR n25/2	100.0%	27.23	24.00	20.98	20.30	20.68	20.30	25.20
	NR n30	100.0%	27.35	22.30	23.94	20.30	20.73	20.30	23.00
	NR n41	63.3%	27.72	21.50	20.94	19.30	20.94	19.30	24.70
	NR n66	100.0%	30.16	23.80	22.74	21.80	22.09	21.80	25.20
ANT4	GSM 1900 2 slots	25.0%	26.70	26.30	28.99	26.80	27.00	26.80	28.00
	W-CDMA B2	100.0%	20.49	20.30	21.30	20.80	20.99	20.80	23.70
	W-CDMA B4	100.0%	20.53	19.80	23.82	21.30	21.69	21.30	23.70
	LTE Band 7	100.0%	19.69	19.50	20.20	19.50	20.20	19.50	23.20
	LTE Band 25/2	100.0%	20.51	20.30	22.10	20.80	20.99	20.80	23.70
	LTE Band 30	100.0%	20.54	20.30	20.60	20.00	20.21	20.00	23.20
	LTE Band 41	63.3%	20.90	19.50	23.80	20.80	22.25	20.80	25.00
	LTE Band 48	63.3%	19.72	19.50	23.66	20.30	20.56	20.30	21.70
	LTE Band 66/4	100.0%	19.98	19.80	22.66	21.30	21.69	21.30	23.70
	NR n7	100.0%	19.95	19.50	21.17	19.50	20.40	19.50	23.20
	NR n25/2	100.0%	20.54	20.30	22.39	20.80	21.12	20.80	23.70
	NR n30	100.0%	21.05	20.30	21.42	20.00	20.80	20.00	23.20
	NR n41	63.3%	17.94	17.50	22.78	18.80	19.98	18.80	25.70
	NR n66	100.0%	20.32	19.80	23.43	21.30	21.86	21.30	23.70
	NR n77	63.3%	19.42	19.20	20.22	19.50	19.71	19.50	24.00
ANT7	LTE Band 48	63.3%	33.33	24.80	23.00	22.80	23.00	22.80	24.80
	NR n77	63.3%	31.33	25.70	21.20	21.00	21.20	21.00	25.70
ANT8	LTE Band 48	63.3%	22.95	22.50	24.45	23.00	23.22	23.00	23.00
	NR n77	63.3%	20.45	20.20	21.98	20.50	20.68	20.50	24.50
ANT9	LTE Band 48	63.3%	36.81	25.20	26.90	25.20	26.90	25.20	25.20
	NR n77	63.3%	35.58	25.70	22.79	22.50	22.79	22.50	25.70

Exposure Scenario		Duty Cycle	Head		Body-worn		Hotspot		P _{max} (dBm)
Spatial-average			1-g		1-g		1-g		
Test Distance			0 mm		5 mm		5 mm		
Power Mode (DSI)			DSI: 0		DSI: 1		DSI: 1		
Antenna	Tech/Band		P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	P _{design} (dBm)	P _{limit} + Tolerance (dBm)	
			Burst Average		Burst Average		Burst Average		Burst Average
ANT3	GSM 1900 2 slots	25.0%	33.91	29.50	26.49	26.30	26.49	26.30	30.00
	W-CDMA B2	100.0%	26.59	24.00	20.50	20.30	20.50	20.30	25.20
	W-CDMA B4	100.0%	29.77	23.80	22.01	21.80	22.01	21.80	25.20
	LTE Band 7	100.0%	27.30	23.30	20.62	19.30	19.49	19.30	25.20
	LTE Band 25/2	100.0%	27.17	24.00	21.33	20.30	20.57	20.30	25.20
	LTE Band 30	100.0%	26.96	22.30	23.12	20.30	20.51	20.30	23.00
	LTE Band 41	63.3%	29.10	23.50	22.09	21.30	21.49	21.30	25.70
	LTE Band 66/4	100.0%	29.96	23.80	22.43	21.80	22.00	21.80	25.20
	NR n7	100.0%	27.33	23.30	20.60	19.30	20.60	19.30	25.20
	NR n25/2	100.0%	27.23	24.00	20.98	20.30	20.68	20.30	25.20
	NR n30	100.0%	27.35	22.30	23.94	20.30	20.73	20.30	23.00
	NR n41	63.3%	27.72	21.50	20.94	19.30	20.94	19.30	24.70
NR n66	100.0%	30.16	23.80	22.74	21.80	22.09	21.80	25.20	
ANT4	GSM 1900 2 slots	25.0%	26.70	26.30	28.99	26.80	27.00	26.80	28.00
	W-CDMA B2	100.0%	20.49	20.30	21.30	20.80	20.99	20.80	23.70
	W-CDMA B4	100.0%	20.53	19.80	23.82	21.30	21.69	21.30	23.70
	LTE Band 7	100.0%	19.69	19.50	20.20	19.50	20.20	19.50	23.20
	LTE Band 25/2	100.0%	20.51	20.30	22.10	20.80	20.99	20.80	23.70
	LTE Band 30	100.0%	20.54	20.30	20.60	20.00	20.21	20.00	23.20
	LTE Band 41	63.3%	20.90	19.50	23.80	20.80	22.25	20.80	25.00
	LTE Band 48	63.3%	19.72	19.50	23.66	20.30	20.56	20.30	21.70
	LTE Band 66/4	100.0%	19.98	19.80	22.66	21.30	21.69	21.30	23.70
	NR n7	100.0%	19.95	19.50	21.17	19.50	20.40	19.50	23.20
	NR n25/2	100.0%	20.54	20.30	22.39	20.80	21.12	20.80	23.70
	NR n30	100.0%	21.05	20.30	21.42	20.00	20.80	20.00	23.20
	NR n41	63.3%	17.94	17.50	22.78	18.80	19.98	18.80	25.70
	NR n66	100.0%	20.32	19.80	23.43	21.30	21.86	21.30	23.70
	NR n77	63.3%	19.42	19.20	20.22	19.50	19.71	19.50	24.00
ANT7	LTE Band 48	63.3%	33.33	24.80	23.00	22.80	23.00	22.80	24.80
	NR n77	63.3%	31.33	25.70	21.20	21.00	21.20	21.00	25.70
ANT8	LTE Band 48	63.3%	22.95	22.50	24.45	23.00	23.22	23.00	23.00
	NR n77	63.3%	20.45	20.20	21.98	20.50	20.68	20.50	24.50
ANT9	LTE Band 48	63.3%	36.81	25.20	26.90	25.20	26.90	25.20	25.20
	NR n77	63.3%	35.58	25.70	22.79	22.50	22.79	22.50	25.70

Therefore, for this EUT, SAR and conducted power measurements at P_{limit} will be the same as those performed at P_{max} . SAR measured at P_{limit} (reported in UL's *FCC SAR Test Report*, 13573771-S1) can be leveraged in this section to avoid re-testing. The worst-case reported SAR values for Sub-6 GHz are listed in §2.4 of the Part 0 report and the worst-case reported WLAN SAR results are listed in Table 4-2.

Table 4-2: Worst-case reported WLAN SAR

Technology	Freq (GHz)	ANT			Reported 1-g SAR (W/kg)			P_{max} Tune-up		
		Head	Body-worn	Hotspot	Head	Body-worn	Hotspot	Head	Body-worn	Hotspot
WLAN	2.4	ANT4	ANT3	ANT3	0.356	0.418	0.470	14.25	16.50	16.50
	5	ANT6	ANT6	ANT6	0.269	0.396	0.396	11.00	12.50	12.50

Note that WLAN SAR for each of the bands in the above table lists the worst-case SAR out of both WLAN antennas and WLAN MIMO.

4.2. PD Measurement Results at input.power.limit

Tables 3-1 to 3-3 list the beams selected for PD verification test for this EUT and Tables 4-3 to 4-5 list the corresponding PD measurement results at 2 mm spacing. Qualcomm's Smart Transmit algorithm operates based on time-averaged transmit power reported on a per symbol basis, which is independent of modulation, channel, and bandwidth (RBs). Therefore, PD measurements in Tables 4-3 to 4-5 were conducted with the EUT in *Factory Test Mode* (FTM), with CW modulation and on the worst-case channel determined through simulations (See Appendix B of the Part 0 report), with the EUT transmitting at *input.power.limit* (listed in Table 3-4 of the Part 0 report) corresponding to the tested beams.

All 4cm² PD values for the selected beams are listed in Tables 4-3 to 4-5. In addition to these selected beams, 4cm² PD for a few more beams (highlighted in Tables 4-3 to 4-5) were used in the Part 2 report.

Table 4-3: PD Measurement results for n258

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M1	24.300	2016667	30		1.0	1	100	1	Back	2.090	2.640
	24.300	2016667	37	165	-2.6	1	100	1	Back	1.370	1.940
	25.875	2042915		168	0.7	1	100	33	Back	4.070	5.700
	25.875	2042915		168	0.7	1	100	33	Left	0.052	0.069
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M0	25.875	2042915	11		6.7	1	100	1	Back	2.070	2.440
	25.875	2042915	11	139	2.4	1	100	1	Back	2.960	3.370
	25.875	2042915		150	2.8	2	100	33	Back	4.940	5.390
	25.875	2042915		150	2.8	2	100	33	Left	0.169	0.181
	25.875	2042915		150	2.8	2	100	33	Top	0.892	0.907
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M2	27.450	2069160		160	0.0	1	100	1	Right	2.280	3.360
	27.450	2069160	32	160	-3.2	1	100	1	Right	1.450	2.380
	27.450	2069160	36		0.6	1	50	1	Right	3.500	6.250
	27.450	2069160	36		0.6	1	50	1	Back	0.083	0.096
	27.450	2069160	36		0.6	1	50	1	Front	0.113	0.121

n258	PD_Design_Target (W/m^2):		6				
	Total Uncertainty (dB):		2.2				
	Worst-case location (x,y,z) (m):		S4 (Edge Right) (0.04104, -0.02700, 0.00000)				
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m^2)	bj*PD_design_target + total uncertainty (W/m^2)	Beam/Beam-pair ID	Measured PD (W/m^2)	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	168	5.7	S2	0.0215
1	0.9772	10	9.730	36	6.25	S4	1
Verification:		(0.0215 x 5.7) + (1 x 6.25) = 6.37255 < 9.73					

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

Table 4-4: PD Measurement results for 260

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M1	37.050	2229167	38		2.6	1	100	1	Back	3.280	3.840
	37.050	2229167	30	158	-1.0	1	100	1	Back	3.050	3.410
	37.050	2229167		167	2.2	1	100	33	Back	4.710	5.210
	37.050	2229167		167	2.2	1	100	33	Left	0.028	0.050
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M0	37.050	2229167	23		8.1	1	100	1	Back	2.300	2.820
	37.050	2229167	22	150	3.8	1	100	1	Back	2.900	3.260
	37.050	2229167		139	7.3	1	100	66	Back	3.630	4.140
	37.050	2229167		139	7.3	1	100	66	Left	0.097	0.104
	37.050	2229167		139	7.3	1	100	66	Top	0.148	0.163
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M2	38.500	2253330		164	1.7	1	100	1	Right	2.270	3.770
	38.500	2253330	42	170	-2.1	1	100	1	Right	2.670	3.280
	38.500	2253330	34		1.5	1	100	1	Right	5.150	6.050
	38.500	2253330	34		1.5	1	100	1	Back	1.030	1.440
	38.500	2253330	34		1.5	1	100	1	Front	1.750	2.220

n260	PD_Design_Target (W/m^2):		6				
	Total Uncertainty (dB):		2.2				
	Worst-case location (x,y,z) (m):		S4 (Edge Right) (0.04104, -0.03600, 0.00000)				
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m^2)	bj*PD_design_target + total uncertainty (W/m^2)	Beam/Beam-pair ID	Measured PD (W/m^2)	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	167	5.21	S2	0.0119
1	0.9772	10	9.730	34	6.05	S4	1
Verification:			(0.0119 x 5.21) + (1 x 6.05) = 6.111999 < 9.73				

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

Table 4-5: PD Measurement results for 261

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M1	27.550	2070833	40		1.8	1	100	1	Back	4.470	5.580
	27.550	2070833	37	165	-2.2	1	100	1	Back	4.270	4.830
	27.550	2070833		156	1.6	1	100	33	Back	6.530	7.310
	27.550	2070833		156	1.6	1	100	33	Left	0.037	0.057
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M0	27.550	2070833	10		6.0	1	100	1	Back	1.810	2.230
	27.550	2070833		138	6.1	1	100	1	Back	2.160	2.800
	28.300	2083330	21	149	2.5	1	100	1	Back	3.610	4.130
	28.300	2083330	21	149	2.5	1	100	1	Left	0.053	0.065
	28.300	2083330	21	149	2.5	1	100	1	Top	0.034	0.058
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#	Surface	W/m ²	W/m ²
M2	27.925	2077084		164	0.0	1	100	1	Right	2.500	4.270
	27.925	2077084	44	172	-3.5	1	100	1	Right	2.490	3.430
	27.550	2070833	41		0.4	1	50	1	Right	4.940	7.380
	27.550	2070833	41		0.4	1	50	1	Back	1.340	1.980
	27.550	2070833	41		0.4	1	50	1	Front	1.390	1.930

n261	PD_Design_Target (W/m^2):		6				
	Total Uncertainty (dB):		2.2				
	Worst-case location (x,y,z) (m):		S4 (Edge Right) (0.04104, -0.03500, 0.00000)				
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m^2)	bj*PD_design_target + total uncertainty (W/m^2)	Beam/Beam-pair ID	Measured PD (W/m^2)	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	156	7.31	S2	0.01
1	0.9772	10	9.730	41	7.38	S4	1
Verification:			(0.01 x 7.31) + (1 x 7.38) = 7.4531 < 9.73				

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

The PD distribution plots for both point PD and 4cm² avg PD for the highest PD configuration in Tables 4-1, 4-2 & 4-3 is given below.

Note: Dasy mmWave module automatically computes grid extents from anchor scan

n258:

Name, Manufacturer	Dimensions [mm]	DUT Type
A2484	160.0 x 78.0 x 9.0	Phone

Exposure Conditions

Phantom Section	Position, Distance [mm]	Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	EDGE RIGHT, 2.00		Custom Band	CW, 0--	27450.0, 27450000	1.0

Hardware Setup

Medium	Probe, Calibration Date	DAE, Calibration Date
--Air--	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

Scan Setup

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2021-06-23, 14:35
Avg. Area [cm ²]	4.00
pS _{tot} avg [W/m ²]	6.25
pS _n avg [W/m ²]	3.50
E _{peak} [V/m]	100
Power Drift [dB]	-0.04

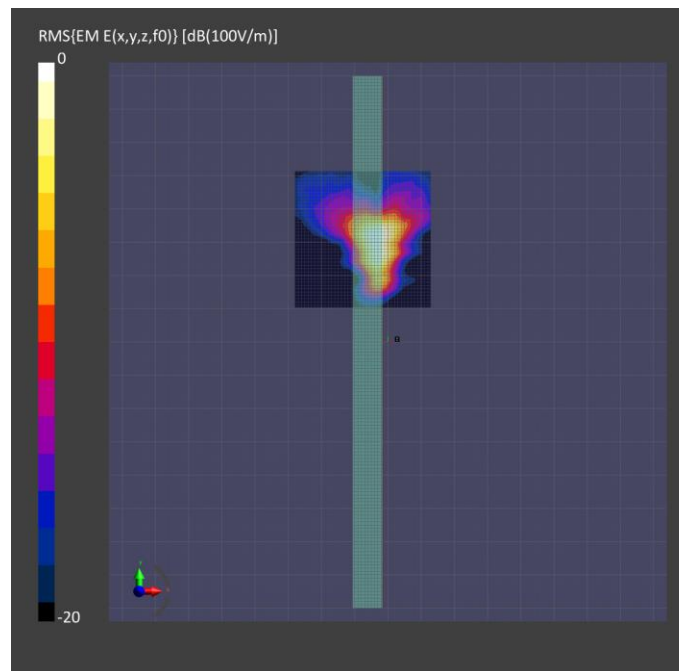


Figure 4-1: Band n258, beam ID 36, 4 cm² PD, Edge Right

n260:

Name, Manufacturer	Dimensions [mm]	DUT Type
A2484	160.0 x 78.0 x 9.0	Phone

Exposure Conditions

Phantom Section	Position, Distance [mm]	Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	EDGE RIGHT, 2.00		Custom Band	CW, 0--	38500.0, 38500000	1.0

Hardware Setup


Medium	Probe, Calibration Date	DAE, Calibration Date
--Air--	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

Scan Setup

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2021-06-23, 22:57
Avg. Area [cm ²]	4.00
pS _{tot} avg [W/m ²]	6.05
pS _n avg [W/m ²]	5.15
E _{peak} [V/m]	114
Power Drift [dB]	0.04

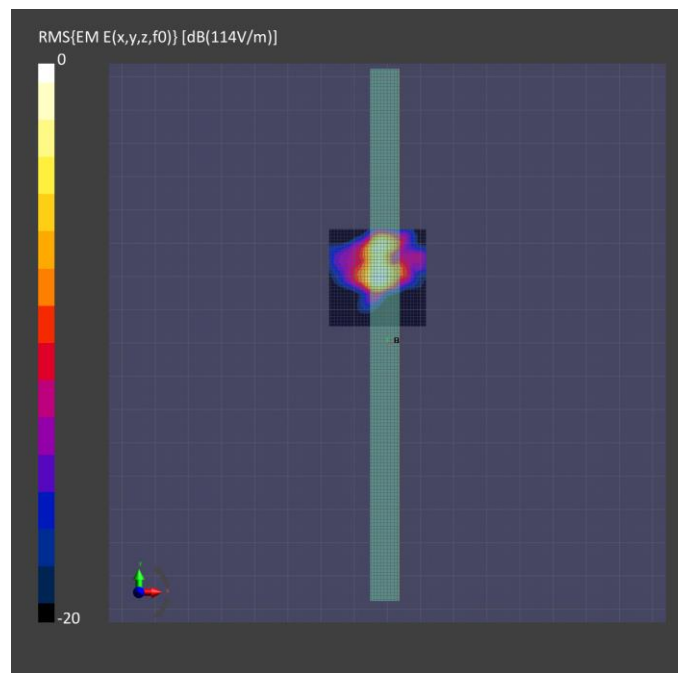**Figure 4-2: Band n260, beam ID 34, 4 cm² PD, Edge Right**

n261:

Name, Manufacturer	Dimensions [mm]	DUT Type
A2484	160.0 x 78.0 x 9.0	Phone

Exposure Conditions

Phantom Section	Position, Distance [mm]	Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	EDGE RIGHT, 2.00		Custom Band	CW, 0--	27550.0, 27550000	1.0

Hardware Setup


Medium	Probe, Calibration Date	DAE, Calibration Date
--Air--	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

Scan Setup

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2021-06-26, 21:55
Avg. Area [cm ²]	4.00
pS _{tot} avg [W/m ²]	7.38
pS _n avg [W/m ²]	4.94
E _{peak} [V/m]	105
Power Drift [dB]	-0.21

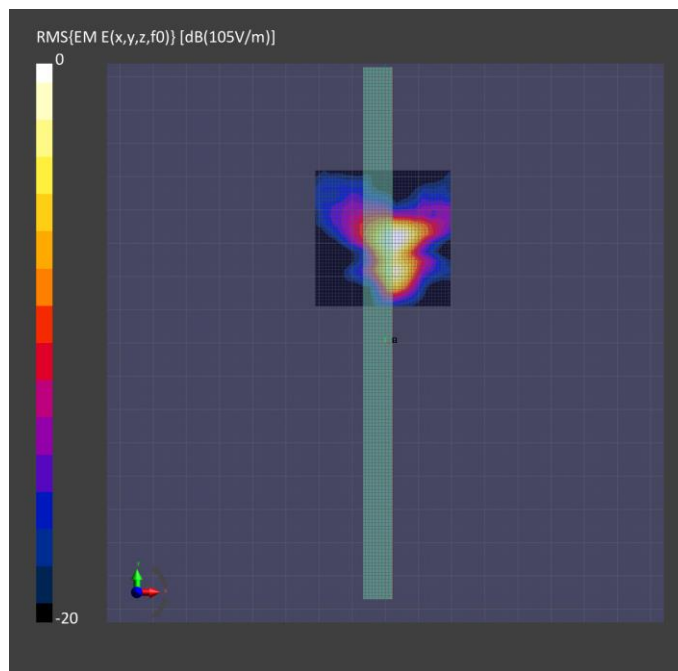**Figure 4-3: Band n261, beam ID 41, 4 cm² PD, Edge Right**

4.3. Simultaneous Transmission Analysis

The EUT supports simultaneous transmission of multiple radios. RF exposure compliance in simultaneous transmission scenarios is evaluated in this section.

It must be noted here that Qualcomm's Smart Transmit time-averaging algorithm was applied to only WWAN (Sub-6GHz/5G mmW NR) on this device, where the time-averaged power level is controlled so that the RF exposure is $\leq \text{SAR}_{\text{Design Target}}$ (corresponding to P_{limit}) for Sub-6 GHz WWAN and $\leq \text{PD}_{\text{Design Target}}$ (corresponding to input.power.limit) for 5G mmW NR. Since there is total design related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this uncertainty in the corresponding design target, thus, with 1dB of device uncertainty for sub-6 WWAN and 2.2dB of device uncertainty for 5G mmW NR. Therefore, the worst-case RF exposure for this EUT is:

Table 4-6: Worst-case time-averaged RF exposure for WWAN

Scenario	WWAN	
	Sub-6 GHz WWAN	5G mmW NR
Maximum time-averaged power level	P_{limit}	input.power.limit
Maximum time-averaged exposure (Design Targets)	0.8 W/kg (1-g SAR)	6 W/m ²
Design-related uncertainty (dB)	1.00	2.20
Worst-case time-averaged RF exposure	Reported SAR $\dagger$ = 1 W/kg (1-g SAR)	Reported PD* = 10 W/m ²

$\dagger$: For this EUT, $(P_{\text{limit}} + 1.0\text{dB uncertainty}) \geq P_{\text{max}}$ (maximum RF tune-up output power).

Therefore, time-averaged SAR exposure from Smart Transmit enabled EUT (at P_{limit}) cannot exceed the reported SAR corresponding to P_{max} listed in Table 4-1.

WLAN reported 1g SAR at the maximum RF tune-up output power is listed in Table 4-2.

4.3.1. Analysis

RF exposure compliance with WWAN+WLAN simultaneous transmission scenarios is demonstrated for various radio configurations using the equation below:

$$\text{Total norm. RF exposure} = \text{norm. RF exposure from Smart Transmit enabled WWAN (norm. SAR from Sub-6 GHz} + \text{norm. PD from 5G mmW NR)} + \text{norm. SAR from WLAN} \leq 1.0 \text{ normalized limit (1)}$$

Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from Sub-6 GHz WWAN and time-averaged RF exposure from 5G mmW NR, i.e.,

$$\text{norm. RF exposure from Smart Transmit enabled WWAN: (normalized SAR exposure from Sub-6 GHz)} + \text{(normalized PD exposure from 5G mmW NR)} \leq 1.0 \text{ normalized limit (2)}$$

In other words, Smart Transmit algorithm controls the total RF exposure from both Sub-6 GHz radio and 5G mmW NR to not exceed the FCC limit. All WWAN sub6 antennas are assumed to collocate with each mmW module (i.e., ignoring spatial distribution of WWAN Sub-6 hotspots) and directly adds normalized RF exposures from Sub-6 GHz WWAN and from each 5G mmW NR module, i.e.,

$$\begin{aligned} \text{If } A &= \text{max normalized time-averaged SAR exposure from Sub-6 GHz,} \\ B &= \text{max normalized time-averaged PD exposure from 5G mmW NR,} \end{aligned}$$

Then, equation (2) can be re-written as below because All WWAN sub6 antennas are assumed to collocate with each mmW module and 5G mmW NR hotspot:

$$\text{Smart Transmit enabled WWAN: } x(t) * A + (1-x(t)) * B \leq 1.0 \text{ normalized limit (3)}$$

Here, “ $x(t)*A$ ” represents percentage of normalized time-averaged RF exposure from Sub-6 GHz WWAN, and $x(t)$ ranges between [0,1]; “ $(1-x(t))*B$ ” is remaining percentage of RF exposure contribution from 5G mmW NR. Smart Transmit controls ‘ x ’ in real time such that the sum of these exposures never exceeds the 1.0 normalized limit.

Note that mathematically:

$$x(t) * A + (1 - x(t)) * B \leq \max(A, B) \leq 1.0 \text{ normalized limit for } x(t) \in [0,1] \text{ (4)}$$

Therefore, if equations (5a) and (5b) are proven:

$$A + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit (5a),}$$

$$B + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit (5b),}$$

Then, based on equation (4), the condition below is also proved:

$$[x(t) * A + (1 - x(t)) * B] + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit (5c)}$$

which is the same as equation (1), as a means to demonstrate compliance for simultaneous transmission.

Additionally, it should be noted that in the absence of 5G mmW NR, Smart Transmit limits the maximum RF exposure contributed from Sub-6 GHz WWAN to 100% normalized exposure (i.e., $x=1.0$ in equation 3). Therefore:

$$\text{Smart Transmit enabled WWAN: } A = \max(\text{normalized SAR exposure from Sub-6 GHz}) \leq 1.0 \text{ normalized limit (6a)}$$

$$\text{Smart Transmit enabled WWAN: } B = \max(\text{normalized PD exposure from 5G mmW NR}) \leq 1.0 \text{ normalized limit (6b)}$$

Thus, for compliance demonstration given by equation (1), equation (7) is obtained by combining equations (5a & 5b) and (6a & 6b) and should be proven to guarantee simultaneous transmission compliance:

$$\text{Total normalized RF exposure} = \text{norm. SAR from Sub-6 GHz WWAN} + \text{norm. SAR from WLAN} < 1.0 \text{ normalized FCC limit (7a)}$$

$$\text{Total normalized RF exposure} = \text{norm. PD from 5G mmW NR WWAN} + \text{norm. SAR from WLAN} < 1.0 \text{ normalized FCC limit (7b)}$$

The compliance for simultaneous transmission scenarios of WWAN (Sub-6 GHz/5G mmW NR) radio enabled with Smart Transmit and WLAN without Smart Transmit is re-evaluated for all transmission scenarios supported by this EUT.

As described in equation (7), simultaneous transmission analysis for WWAN + WLAN is performed in two parts:

1. Sub-6 GHz WWAN + WLAN (i.e., Eq. (7a) with compliance demonstration in §4.3.2)
2. 5G mmW NR WWAN + WLAN (i.e., Eq. (7b) with compliance demonstration in §4.3.3)

By combining equations a and b variants, the FCC requirement expressed in Eq. (1) is re-written below:

$$\text{Total norm. RF exposure} = \text{norm. RF exposure from Smart Transmit enabled WWAN (norm. SAR from Sub-6 GHz WWAN + norm. PD from 5G mmW NR)} + \text{norm. SAR from WLAN} \leq 1.0 \text{ normalized limit (1)}$$

4.3.2. Simultaneous Transmission Compliance Demonstration for Sub-6 GHz WWAN + WLAN

Simultaneous transmission analysis for Sub-6 WWAN + WLAN is shown in the UL *FCC SAR Test Report* 13573771-S1.

4.3.3. Simultaneous Transmission Compliance Demonstration for 5G mmW NR WWAN + WLAN

Simultaneous transmission analysis is performed in this section using worst-case PD values listed in Tables 4-3 to 4-5 for compliance demonstration of 5G mmW NR WWAN + WLAN, along with all worst-case reported SAR, extracted from UL *FCC SAR Test Report* 13573771-S1, values for WLAN listed in Table 4-2.

Simultaneous transmission analysis on all 5G mmW NR WWAN + WLAN scenarios are listed below:

Table 4-7: Simultaneous transmission analysis scenarios for 5G mmW NR WWAN + WLAN

1	2.4GHz WLAN* + 5G mmW NR
2	5GHz WLAN* + 5G mmW NR
3	5GHz WLAN* + BT + 5G mmW NR

*: For each of the WLAN bands, worst-case SAR out of both WLAN antennas and WLAN MIMO scenarios is used during simultaneous transmission analysis. Additionally, note that WLAN 2.4GHz and WLAN 5GHz cannot transmit simultaneously.

The total exposure ratio (TER) is calculated using the equation below, followed by the calculated TER for this EUT:

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_{n,limit}} + \sum_{n=1}^N \frac{S_{m,avg}}{S_{m,limit}} < 1$$

Table 4-8: 5G mmW NR Simulation PD Surface Ratio n258

n258					
Surface	PD Magnitude Ratio		Head	Body ¹	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m ²)	PD @ 5mm (W/m ²)	(W/m ²)
S1	0.490	-	4.900	3.185	0.121
S2	1.000	0.480	-	6.500	-
S3	0.370	-	-	2.405	0.181
S4	1.000	0.650	-	6.500	-
S5	0.210	-	-	1.365	0.907
S6	0.030	-	-	0.195	-

¹ Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

Table 4-9: 5G mmW NR Simulation PD Surface Ratio n260

n260					
Surface	PD Magnitude Ratio		Head	Body ¹	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m ²)	PD @ 5mm (W/m ²)	(W/m ²)
S1	0.440	-	4.400	2.376	2.220
S2	1.000	0.460	-	5.400	-
S3	0.240	-	-	1.296	0.104
S4	1.000	0.540	-	5.400	-
S5	0.210	-	-	1.134	0.163
S6	0.020	-	-	0.108	-

¹ Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

Table 4-10: 5G mmW NR Simulation PD Surface Ratio n261

n261					
Surface	PD Magnitude Ratio		Head	Body ¹	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m ²)	PD @ 5mm (W/m ²)	(W/m ²)
S1	0.510	-	5.100	3.264	1.930
S2	1.000	0.470	-	6.400	-
S3	0.300	-	-	1.920	0.065
S4	1.000	0.640	-	6.400	-
S5	0.200	-	-	1.280	0.058
S6	0.020	-	-	0.128	-

¹ Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

Table 4-11: Head TER for Worst-Case WLAN + 5G mmW NR n258

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	4.900	0.356	0.269	0.079	-	-	-
Ratio to Limit	0.490	0.222	0.168	0.049	0.712	0.658	0.707

Table 4-12: Head TER for Worst-Case WLAN + 5G mmW NR n260

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	4.400	0.356	0.269	0.079	-	-	-
Ratio to Limit	0.440	0.222	0.168	0.049	0.662	0.608	0.657

Table 4-13: Head TER for Worst-Case WLAN + 5G mmW NR n261

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	5.100	0.356	0.269	0.079	-	-	-
Ratio to Limit	0.510	0.222	0.168	0.049	0.732	0.678	0.727

Table 4-14: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n258

n258							
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
Scenario	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
S1 @ 5 mm	Reported Exposure	3.185	0.000	0.372	0.066	-	-
	Ratio to Limit	0.319	0.000	0.232	0.041	0.319	0.551
S2 @ 5mm	Reported Exposure	6.500	0.418	0.396	0.095	-	-
	Ratio to Limit	0.650	0.261	0.248	0.059	0.911	0.898
S3 @ 5mm	Reported Exposure	2.405	0.470	0.372	0.083	-	-
	Ratio to Limit	0.241	0.294	0.232	0.052	0.534	0.473
S4 @ 5mm	Reported Exposure	6.500	0.433	0.000	0.069	-	-
	Ratio to Limit	0.650	0.271	0.000	0.043	0.921	0.650
S5 @ 5mm	Reported Exposure	1.365	0.000	0.372	0.030	-	-
	Ratio to Limit	0.137	0.000	0.232	0.019	0.137	0.369
S6 @ 5mm	Reported Exposure	0.195	0.000	0.351	0.023	-	-
	Ratio to Limit	0.020	0.000	0.219	0.015	0.020	0.239

Table 4-15: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n260

n260							
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
Scenario	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
S1 @ 5 mm	Reported Exposure	2.376	0.000	0.372	0.066	-	-
	Ratio to Limit	0.238	0.000	0.232	0.041	0.238	0.470
S2 @ 5mm	Reported Exposure	5.400	0.418	0.396	0.095	-	-
	Ratio to Limit	0.540	0.261	0.248	0.059	0.801	0.788
S3 @ 5mm	Reported Exposure	1.296	0.470	0.372	0.083	-	-
	Ratio to Limit	0.130	0.294	0.232	0.052	0.423	0.362
S4 @ 5mm	Reported Exposure	5.400	0.433	0.000	0.069	-	-
	Ratio to Limit	0.540	0.271	0.000	0.043	0.811	0.540
S5 @ 5mm	Reported Exposure	1.134	0.000	0.372	0.030	-	-
	Ratio to Limit	0.113	0.000	0.232	0.019	0.113	0.346
S6 @ 5mm	Reported Exposure	0.108	0.000	0.351	0.023	-	-
	Ratio to Limit	0.011	0.000	0.219	0.015	0.011	0.230

Table 4-16: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n261

n261							
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P _{low}	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m ²	W/kg	W/kg	W/kg			
Scenario	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
S1 @ 5 mm	Reported Exposure	3.264	0.000	0.372	0.066	-	-
	Ratio to Limit	0.326	0.000	0.232	0.041	0.326	0.559
S2 @ 5mm	Reported Exposure	6.400	0.418	0.396	0.095	-	-
	Ratio to Limit	0.640	0.261	0.248	0.059	0.901	0.888
S3 @ 5mm	Reported Exposure	1.920	0.470	0.372	0.083	-	-
	Ratio to Limit	0.192	0.294	0.232	0.052	0.486	0.424
S4 @ 5mm	Reported Exposure	6.400	0.433	0.000	0.069	-	-
	Ratio to Limit	0.640	0.271	0.000	0.043	0.911	0.640
S5 @ 5mm	Reported Exposure	1.280	0.000	0.372	0.030	-	-
	Ratio to Limit	0.128	0.000	0.232	0.019	0.128	0.360
S6 @ 5mm	Reported Exposure	0.128	0.000	0.351	0.023	-	-
	Ratio to Limit	0.013	0.000	0.219	0.015	0.013	0.232

5. Conclusions

Table 5-1 shows the worst-case 1-g SAR at $P_{limit} + tolerance$ and worst-case 4cm²-avg PD at *input.power.limit*.

Table 5-1: Reported RF exposure level

Reported RF Exposure Level		Notes
Highest 1-g SAR at $P_{limit} + tolerance$ (W/kg)	0.959	Refer to §1 for the reference SAR Report
Highest 4cm ² -avg PD at <i>input.power.limit</i> (W/m ²)	7.380	§4.2
Highest 1-g SAR (W/kg) for simultaneous Tx (Sub-6 WWAN + WLAN)	1.502	Refer to §1 for the reference SAR Report
Highest Total Exposure Ratio for simultaneous Tx (5G mmW NR + WLAN)	0.957	§4.3

Qualcomm's Smart Transmit feature employed in the EUT meets the $SAR_{Design Target}$ and $PD_{Design Target}$ (within the design uncertainties) when operating in the static transmission condition at $P_{limit} + tolerance$ and *input.power.limit*, respectively, and is compliant with the FCC RF exposure limits.

Appendices

Refer to separated files for the following appendices.

A. mmW Probe Certificate

B. Verification Source Certificate