



TEST REPORT

Report Number : 14040863-E21V3

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2650 (Parent Model)
A2889, A2890, A2891, A2892 (Variant Models)

FCC ID : BCG-E8140A (Parent Model)
BCG-E8150A, BCG-E8151A, BCG-E8152A, BCG-E8152A (Variant Models)

IC : 579C-E8140A (Parent Model)
579C-E8150A, 579C-E8151A, 579C-E8152A, 579C-E8152A (Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR 47 PART 15 SUBPART F §15.519
ISED RSS-220 ISSUE 1 AMENDMENT 1

Date Of Issue:
July 09, 2022

Prepared by:
UL LLC
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	06/22/2022	Initial Issue	---
V2	06/28/2022	Revised section 6.3 and 8	Alejandro M.
V3	07/09/2022	Revised section 5.4, 9.5.1, and 9.7	Alejandro M.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST RESULTS SUMMARY	5
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
5.1. METROLOGICAL TRACEABILITY	6
5.2. DECISION RULES	6
5.3. MEASUREMENT UNCERTAINTY	6
5.4. SAMPLE CALCULATION	6
6. EQUIPMENT UNDER TEST	7
6.1. DESCRIPTION OF EUT	7
6.2. MAXIMUM OUTPUT POWER	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
6.4. MODULATION	8
6.5. SOFTWARE AND FIRMWARE	8
7. DESCRIPTION OF TEST SETUP	9
8. TEST AND MEASUREMENT EQUIPMENT	11
9. APPLICABLE LIMITS AND TEST RESULTS	12
9.1. 99% BANDWIDTH	12
9.2. OPERATING BANDWIDTH	15
9.3. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS	19
9.4. CESSATION TIME	23
9.5. EMISSIONS BELOW 960 MHz	27
9.5.1. EMISSIONS, 9 kHz – 30 MHz	29
9.5.2. EMISSIONS, 30 - 960 MHz	33
9.6. AVERAGE EMISSIONS ABOVE 960 MHz	37
9.6.1. AVERAGE EMISSIONS, 0.96 – 6 GHz	41
9.6.2. AVERAGE EMISSIONS, 1.164 – 1.240 GHz	49
9.6.3. AVERAGE EMISSIONS, 1.559 – 1.610 GHz	53
9.6.4. AVERAGE EMISSIONS, 9 – 18 GHz	57
9.6.5. AVERAGE EMISSIONS, 18 – 26.5 GHz	61
9.6.6. AVERAGE EMISSIONS, 26.5 – 40 GHz	65
9.7. AC POWER-LINE CONDUCTED EMISSIONS	69
9.7.1. AC Power Line With Laptop	70
9.7.2. AC Power Line With AC/DC Adapter	74
10. SETUP PHOTOS	78

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014, USA

EUT DESCRIPTION: SMARTPHONE

MODEL: A2650 (Parent Model)
A2889, A2890, A2891, A2892 (Variant Models)

BRAND: APPLE

SERIAL NUMBERS: R9VD6JPQTY; WKF6X21CVH; J6VVG4GLHY; TDT77JMXXL

SAMPLE RECEIPT DATES: APRIL 25, 2022; JUNE 16, 2022; MAY 24, 2022; JUNE 15, 2022

DATE TESTED: APRIL 26 – JUNE 23, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC §15 Subpart F	Complies
ISED RSS-220 Issue 1 Amendment 1	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By:

Tested By:



Thu Chan
Staff Engineer
UL LLC

Alejandro Martinez
Laboratory Engineer
UL LLC

2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.4
15.503 & 15.519 (b)	RSS-220 Sect. 2	-10 dB BW	Complies	ANSI C63.10 Section 10.1
15.519 (c) & (e)	RSS-220 Sect. 4 (c) & 5.3.1 (d)	Pk Power & Max Avg Emissions	Complies	ANSI C63.10 Section 10.3
15.519 (a)(1)	RSS-220 Sect. 5.3.1 (b)	Cessation Time	Complies	None
15.519 (c) & 15.209 (a)	RSS-220 Sect. 3.4	Emissions Below 960 MHz	Complies	ANSI C63.10 Section 10.2
15.519 (c) & (d)	RSS-220 Sect. 5.3.1 (d) & (e)	Emissions Above 960 MHz	Complies	ANSI C63.10 Section 10.3
15.207 (a)	RSS-Gen 8.8	AC Power Line Conducted Emissions	Complies	ANSI C63.10 Section 6.2

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with CFR Title 47 Part 15 Subpart F, KDB 393764 D01 UWB FAQ v02r01, ISED RSS-220 Issue 1 Amendment 1 and ANSI C63.10-2020 and RSS GEN Issue 5.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA	US0104	22541	550739
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA	US0104	2324B	550739

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned}
 \text{EIRP (dBm)} &= \text{Meter Reading (dBm)} + \text{Antenna Factor (dB/m)} + \text{Pre-Amp Gain/Cbl Loss (dB)} \\
 &\quad + \text{dBm-to-dBm Unit Conversion Factor @ 3m} \\
 &= -60 \text{ dBm} + 28 \text{ dB/m} + (-27) \text{ dB} + 11.8 \\
 &= -47.2 \text{ dBm}
 \end{aligned}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned}
 \text{Final Voltage (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{LISN Insertion Loss (dB)} + \text{Cable Loss (dB)} \\
 &\quad + \text{Limiter Factor (dB)} \\
 &= 42.19 \text{ dBuV} + 0.1 \text{ dB} + 0 \text{ dB} + 9.4 \text{ (dB)} \\
 &= 51.69 \text{ dBuV}
 \end{aligned}$$

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

The EUT has a UWB transceiver with two integral antennas (ANT0 = ANT6/UWB0, ANT1 = UWB1). ANT0 operates on 6.5 GHz (Channel 5) and 8 GHz (Channel 9). ANT1 only operates on 8 GHz (Channel 9). The antennas are not user accessible. Six signal configurations (CONFIG 0,1,2,3,4 & 5) are available for each ANT/CH setting.

Testing was performed on both antennas (UWB0/ANT0 and UWB1/ANT1) of the A2650 parent model and on the single antenna (UWB1/ANT1) of the A2889 variant model. Then, the measurement results are used to support the applications for the parent and variant models identified on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

6.2. MAXIMUM OUTPUT POWER

Highest Average Powers based on ANT/CH for both the parent and variant A2889 models are listed as follow:

Parent Model (A2650)			
ANT	CH	CONFIG	Average Power (dBm EIRP)
0	5	1	-42.32
0	9	3	-42.38
1	9	4	-42.32

Variant Model (A2889)			
ANT	CH	CONFIG	Average Power (dBm EIRP)
1	9	2	-42.57

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

Two integral antennas are employed for the parent and variant models. The antenna gains of the tested antennas for the parent and variant A2889 models are listed as follow:

Parent Model (A2650)			
CH	Freq. Band	Antenna Gain (dBi)	
	(GHz)	ANT0	ANT1
5	6.5	2.5	n/a
9	8.0	-0.6	0.2

Variant Model (A2889)			
CH	Freq. Band	Antenna Gain (dBi)	
	(GHz)	ANT0	ANT1
5	6.5	3.0	N/A
9	8.0	-0.7	1.0

6.4. MODULATION

The UWB signal is BPSK pulsed modulated signal.

6.5. SOFTWARE AND FIRMWARE

The Software and Firmware version used at test is FT:1495.0.17~322.2148.1432.

7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop + Adapter	Apple	Mac Book Pro	C02VL9ANHV22
Bacon – USB Adapter	Apple	Bacon UART Cable Pigtail	F7514PIGMN0000043
USB-C Ethernet Adapter	Anker	A8338	AEDRTG0B19400074
Laptop + Adapter	Apple	Mac Book Pro	C2QLN093FKYR
Bacon – USB Adapter	Apple	Bacon UART Cable Pigtail	F7514PIGMN0000075

I/O CABLES

I/O CABLES					
Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
AC	1	AC	Un-shielded	1	N/A
USB	1	USB	Un-shielded	1	N/A

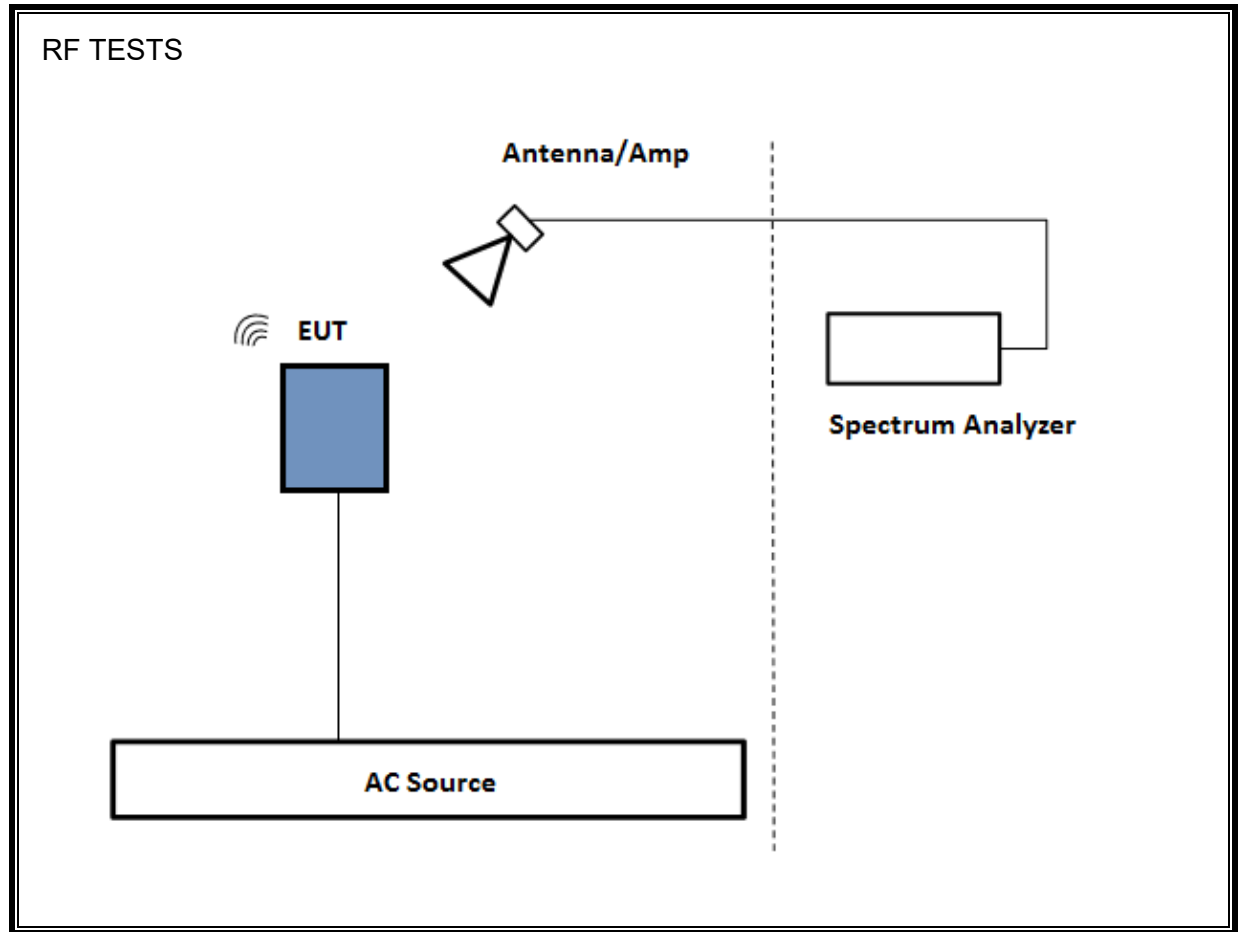
TEST SETUP

The EUT was examined at pre-scan test using a fundamental frequency in the portrait (z), landscape (y), and flatbed (x) position and the worst case orientation of individual ANT/CH/CONFIG setting was determined for final spurious emission measurement. Config 3, Payload 125 of both CH5 and CH9 on ANT0 and CH9 on ANT1 were selected to test for unwanted emissions as the worst case after pre-scan on the parent model. For variant Model A2889 only Config 3, Payload 125 of CH9 on Antenna 1 was selected to test for unwanted emissions.

Measurements of spurious average emissions were made with the device operating at a higher power than production power to ensure compliance. Measurements of the in-band signal (peak and average emissions, 10 dBc bandwidth, 99% bandwidth) were all made at the production power settings.

EUT was connected to AC power adapter in all test cases except 0.96 – 6 GHz, 1164 – 1240 MHz, and 1559 – 1610 MHz due to noise unrelated to the UWB signal from the device.

For simultaneous transmission on the same antenna of multiple channels in the UWB and WiFi, no noticeable new emission was found.

SETUP DIAGRAM FOR TESTS

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Local ID	Cal Date	Cal Due
EMI Test Receiver	Rohde & Schwarz	ESW44	191428	2/20/2022	2/20/2023
Horn Antenna, 1-18 GHz	ETS Lindgren	3117	200786	2/24/2022	2/24/2023
RF Filter Box, 1-18GHz	UL-FR1 (CTECH)	N/A	PRE0183530	11/17/2021	11/17/2022
EMI Test Receiver	Rohde & Schwarz	ESW44	191429	2/20/2022	2/20/2023
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	204044	1/31/2022	1/31/2023
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	79584	7/21/2021	7/21/2022
Antenna, Horn 1-18GHz	ETS Lindgren	3117	81887	3/16/2022	3/16/2023
Rf Filter Box, 1-18GHz	UL-FR1 (CTECH)	N/A	PRE0183207	10/23/2021	10/23/2022
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	PRE0179467	7/29/2021	7/29/2022
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	PRE0179465	7/29/2021	7/29/2022
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	172362	2/9/2022	2/9/2023
Rf amplifier 18-26.5GHz	AMPLICAL	AMP18G26.5-60	171580	6/10/2022	6/10/2023
Antenna, Horn 26.5 to 40GHz	A.R.A.	MWH-2640/B	172365	3/8/2022	3/8/2023
Rf Amplifier, 26-40GHz	AMPLICAL	AMP26G40-60	220537	5/14/2022	5/14/2023
Filter, LPF 0-5400MHz Ch5/9 5.4G LPF	Microtronics	LPM20143	188196	11/30/2021	11/30/2022
Filter, HPF 8.655GHz -40GHz , Ch5 HPF	Wainwright Instruments GmbH	WHNX6-7110-9000-26500-40CD	176232	11/30/2021	11/30/2022
Filter, HPF 11.2GHz, Ch9 11.5G HPF	Wainwright Instruments GmbH	WHW2-8165-11500-21000-40CD	176234	12/9/2021	12/9/2022
EMI TEST RECEIVER	Rohde & Schwarz	ESR	93091	2/21/2022	2/21/2023
Cable, RG223 Coax, double shield, BNC	Pasternack Enterprises	RG233/U	202327	10/22/2021	10/22/2022
Cable, RG223 Coax, double shield, BNC	Pasternack Enterprises	RG233/U	202326	10/22/2021	10/22/2022
Cable, RG223 Coax, double shield, BNC	Pasternack Enterprises	RG233/U	202322	10/22/2021	10/22/2022
*Transient Limiter	TE	TBFL1	207996	6/1/2021	6/1/2022
*Transient Limiter	TE	TBFL1	207996	6/1/2022	6/1/2023
LISN for Conducted Emissions CISPR-16	Fischer Custom Communications, Inc	FCC-LISN-50/250-25-2-01-480V	175765	1/26/2022	1/26/2023
Radiated Software	UL	UL EMC	Ver 9.5, 21 Jan 2022		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, 21 Jan 2022		

*Tests were performed prior to the calibration date to ensure accurate measurements were recorded.

9. APPLICABLE LIMITS AND TEST RESULTS

9.1. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

ANSI C63.10 Section 6.9.3

The transmitter output is connected to a spectrum analyzer. The RBW is in the range of 1% to 5% of the OBW bandwidth. The VBW is set to $\geq 3 \times \text{RBW}$. The sweep time is coupled.

Tabulated data provides the test results of all available test configurations for the parent and variant A2889 models. The plots for the parent model of ANT0, CONFIG 0, Payload 125 on CH5 and ANT1, CONFIG 0, Payload 125 on CH9 bandwidth measurement on are presented and same measurement settings apply to the rest of the test configurations. Same measurement settings from ANT1, CONFIG 0, Payload 125 on CH9 from the parent model also apply to the variant Model A2889 ANT1 CH9 test configurations.

RESULTS**Parent Model**

Employee IDs: 26051, 26522

Location: Chamber D

Test Date: 04/28/2022 – 05/10/2022

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant Polarity	99% BW (MHz)
0	5	0	125	Landscape	H	592.71
0	5	1	125	Landscape	H	585.54
0	5	2	125	Landscape	H	617.77
0	5	3	125	Landscape	H	624.28
0	5	4	0	Landscape	H	609.39
0	5	5	0	Landscape	H	593.23
0	9	0	125	Portrait	H	626.13
0	9	1	125	Portrait	H	621.90
0	9	2	125	Portrait	H	647.92
0	9	3	125	Portrait	H	651.03
0	9	4	0	Portrait	H	628.95
0	9	5	0	Portrait	H	618.79
1	9	0	125	Portrait	H	608.78
1	9	1	125	Portrait	H	605.20
1	9	2	125	Portrait	H	641.78
1	9	3	125	Portrait	H	639.02
1	9	4	0	Portrait	H	625.78
1	9	5	0	Portrait	H	612.91

Variant Model A2889

Employee IDs: 24943, 24947

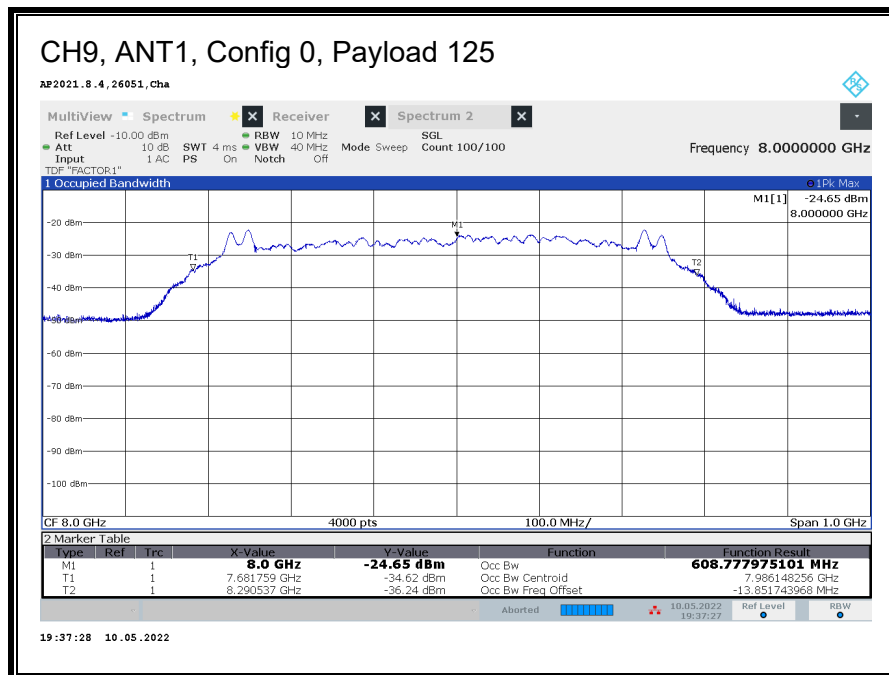
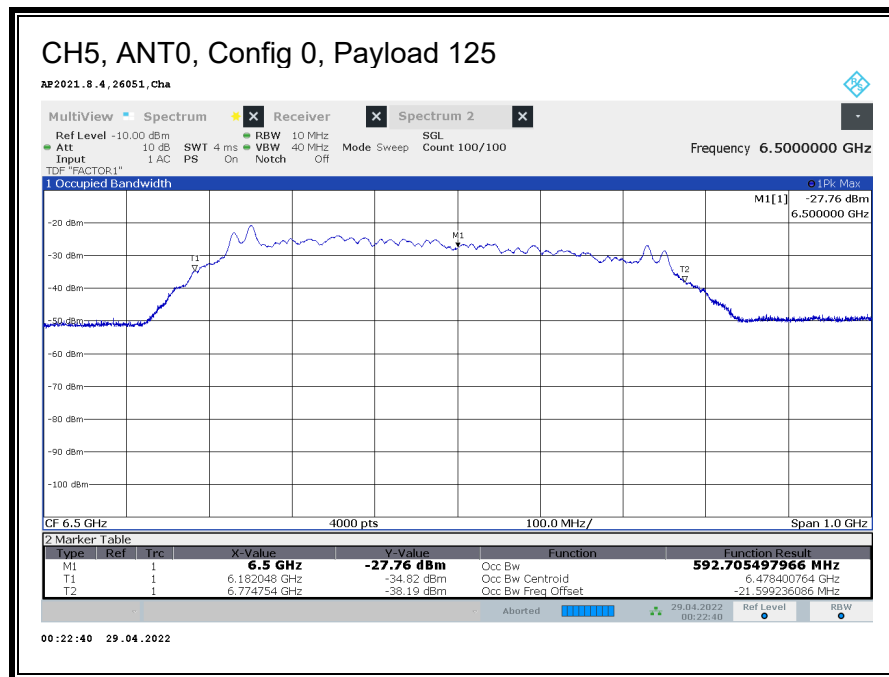
Location: Chamber D

Test Date: 06/21/2022 – 06/23/22

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant Polarity	99% BW (MHz)
1	9	0	125	Portrait	H	608.73
1	9	1	125	Portrait	H	604.15
1	9	2	125	Portrait	H	630.15
1	9	3	125	Portrait	H	659.55
1	9	4	0	Portrait	H	640.53
1	9	5	0	Portrait	H	627.22

99% BW

Parent Model



9.2. OPERATING BANDWIDTH

LIMITS

FCC

§15.503 (a) *UWB bandwidth*. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

§15.503 (b) *Center frequency*. The center frequency, f_C , equals $(f_H + f_L)/2$.

§15.503 (c) *Fractional bandwidth*. The fractional bandwidth equals $2(f_H - f_L)/(f_H + f_L)$.

§15.503 (d) *Ultra-wideband (UWB) transmitter*. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

§15.519 (b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

RSS-220

Section 2 A *UWB device* is an intentional radiator that has either a *-10 dB bandwidth* of at least 500 MHz or a *-10 dB fractional bandwidth* greater than 0.2.

Section 5.1 (a) The -10 dB bandwidth of the device shall be totally contained in the band 3.1-10.6 GHz.

“-10 dB bandwidth B_{-10} ” and “-10 dB fractional bandwidth μ_{-10} ” are defined as follows:

$$B_{-10} = f_H - f_L$$

$$\mu_{-10} = B_{-10}/f_C$$

where:

f_M is the frequency of maximum UWB transmission;

f_H is the highest frequency at which the power spectral density of the UWB transmission is -10 dB relative to f_M ;

f_L is the lowest frequency at which the power spectral density of the UWB transmission is -10 dB relative to f_M ; and

$f_C = (f_H + f_L)/2$ is the centre frequency of the -10 dB bandwidth.

TEST PROCEDURE

ANSI C63.10 Clause 10.1

RSS-220 Section 2 of the Annex

Tabulated data provides the test results of all available test configurations for the parent and variant A2889 models. The plots for the parent model of ANT0, CONFIG 0, Payload 125 on CH5 and ANT1, CONFIG 0, Payload 125 on CH9 bandwidth measurement on are presented and same measurement settings apply to the rest of the test configurations. Same measurement settings from ANT1, CONFIG 0, Payload 125 on CH9 from the parent model also apply to the variant Model A2889 ANT1 CH9 test configurations.

RESULTS**Parent Model**

Employee IDs: 26051, 26522

Location: Chamber D

Test Date: 04/28/2022 – 05/10/2022

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant Polarity	FM (GHz)	FL (GHz)	FH (GHz)	FC (GHz)	OBW (MHz)	Min. OBW (MHz)	OBW Margin (MHz)	OBW Pass/Fail
0	5	0	125	Landscape	H	6.251	6.227	6.752	6.489	525.13	500	25.13	P
0	5	1	125	Landscape	H	6.250	6.227	6.751	6.489	524.63	500	24.63	P
0	5	2	125	Landscape	H	6.250	6.228	6.751	6.489	523.13	500	23.13	P
0	5	3	125	Landscape	H	6.251	6.229	6.750	6.489	521.63	500	21.63	P
0	5	4	0	Landscape	H	6.250	6.227	6.751	6.489	524.63	500	24.63	P
0	5	5	0	Landscape	H	6.251	6.226	6.752	6.489	526.63	500	26.63	P
0	9	0	125	Portrait	H	7.748	7.724	8.250	7.987	526.63	500	26.63	P
0	9	1	125	Portrait	H	7.748	7.724	8.250	7.987	526.63	500	26.63	P
0	9	2	125	Portrait	H	8.249	7.726	8.249	7.987	523.13	500	23.13	P
0	9	3	125	Portrait	H	8.249	7.726	8.249	7.987	522.63	500	22.63	P
0	9	4	0	Portrait	H	8.250	7.725	8.250	7.987	525.63	500	25.63	P
0	9	5	0	Portrait	H	7.748	7.723	8.251	7.987	528.63	500	28.63	P
1	9	0	125	Portrait	H	8.226	7.724	8.250	7.987	526.63	500	26.63	P
1	9	1	125	Portrait	H	8.226	7.724	8.250	7.987	526.13	500	26.13	P
1	9	2	125	Portrait	H	8.226	7.725	8.249	7.987	524.13	500	24.13	P
1	9	3	125	Portrait	H	7.748	7.726	8.249	7.987	523.13	500	23.13	P
1	9	4	0	Portrait	H	8.226	7.724	8.250	7.987	526.63	500	26.63	P
1	9	5	0	Portrait	H	8.226	7.723	8.251	7.987	528.63	500	28.63	P

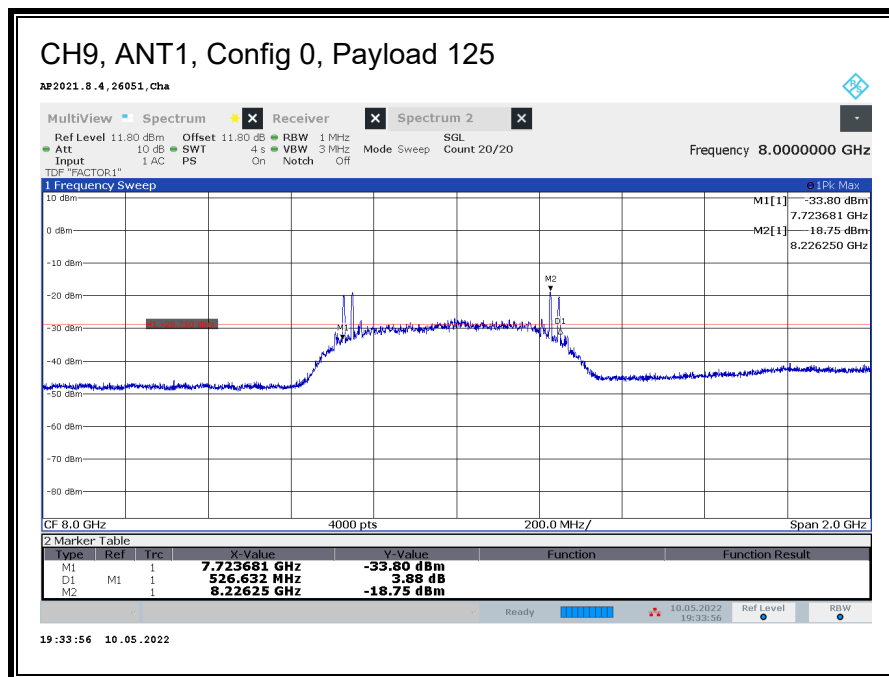
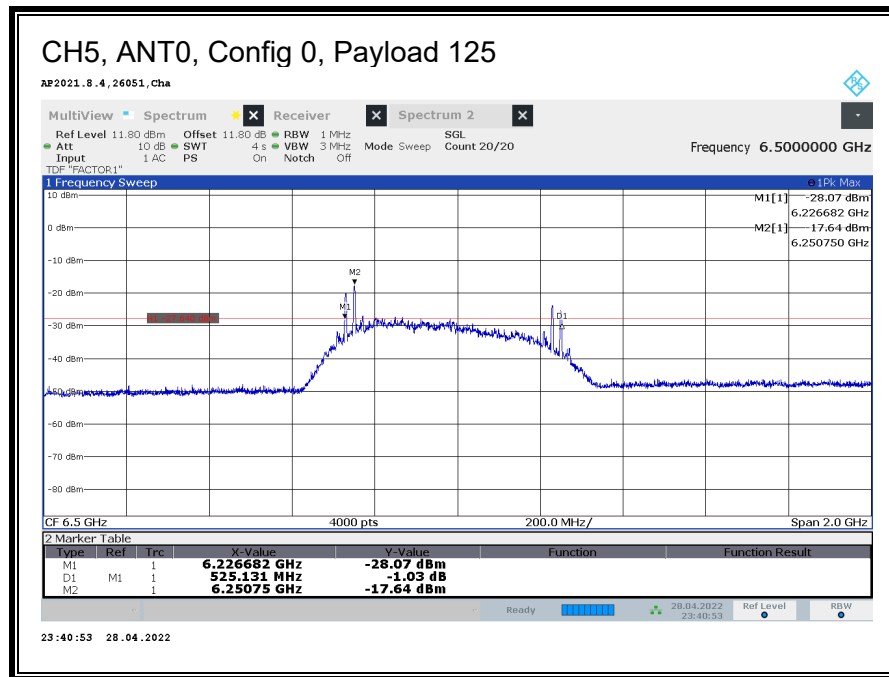
Variant Model A2889

Employee IDs: 24943, 24947

Location: Chamber D

Test Date: 06/21/2022 – 06/23/2022

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant Polarity	FM (GHz)	FL (GHz)	FH (GHz)	FC (GHz)	OBW (MHz)	Min. OBW (MHz)	OBW Margin (MHz)	OBW Pass/Fail
1	9	0	125	Portrait	H	7.748	7.724	8.250	7.987	526.63	500	26.63	P
1	9	1	125	Portrait	H	7.748	7.724	8.250	7.987	526.63	500	26.63	P
1	9	2	125	Portrait	H	7.748	7.725	8.249	7.987	523.63	500	23.63	P
1	9	3	125	Portrait	H	8.226	7.727	8.248	7.987	521.63	500	21.63	P
1	9	4	0	Portrait	H	8.226	7.724	8.250	7.987	526.13	500	26.13	P
1	9	5	0	Portrait	H	8.226	7.723	8.251	7.987	528.13	500	28.13	P

OPERATING BANDWIDTH**Parent Model**

9.3. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

LIMITS

FCC

15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_m . That limit is 0 dBm EIRP.

15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100 - 10600	-41.3

RSS-220

Annex, Section 4 (c) Peak measurements shall be made in addition to average measurements. Transmissions shall not exceed 0 dBm e.i.r.p. in any 50 MHz bandwidth when the average limit is -41.3 dBm/MHz.

Section 5.3.1 (d) Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Frequency	E.I.R.P. in a Resolution Bandwidth of 1 MHz
4.75 – 10.6 GHz	-41.3 dBm

TEST PROCEDURE

ANSI C63.10 Clause 10.3

RSS-220 Annex

Peak EIPR power is measured using RBW of 50 MHz.

The radiated emissions of 6 - 9 GHz frequency band are performed at 3-meter test distance.

Tabulated data provides the test results of all available test configurations for the parent and variant A2889 models. Plots for the parent model of ANT0, CONFIG 0, Payload 125 on CH5 and ANT1, CONFIG 0, Payload 125 on CH9 peak and maximum average power measurements are presented and same measurement settings apply to the rest of test configurations. Same measurement settings from ANT1, CONFIG 0, Payload 125 on CH9 from the parent model also apply to the variant Model A2889 ANT1 CH9 test configurations.

RESULTS**Parent Model**

Employee IDs: 26051, 26522

Location: Chamber D

Test Date: 04/28/2022 – 05/10/2022

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant. Polarity	Peak EIRP Power				Average EIRP Power			
						FM (GHz)	Peak Power (dBm/50MHz)	Peak Limit (0 dBm/50 MHz)	Margin (dB)	FM (GHz)	Avg Power (dBm/MHz)	Avg Limit (dBm/MHz)	Margin (dB)
0	5	0	125	Landscape	H	6.2425	-4.80	0	-4.80	6.3085	-42.64	-41.3	-1.34
0	5	1	125	Landscape	H	6.4805	-3.73	0	-3.73	6.3605	-42.32	-41.3	-1.02
0	5	2	125	Landscape	H	6.4885	-7.83	0	-7.83	6.3675	-42.52	-41.3	-1.22
0	5	3	125	Landscape	H	6.4865	-7.84	0	-7.84	6.3655	-42.76	-41.3	-1.46
0	5	4	0	Landscape	H	6.2455	-4.34	0	-4.34	6.3595	-42.52	-41.3	-1.22
0	5	5	0	Landscape	H	6.2455	-3.13	0	-3.13	6.3095	-42.67	-41.3	-1.37
0	9	0	125	Landscape	H	7.7365	-3.87	0	-3.87	7.8415	-42.58	-41.3	-1.28
0	9	1	125	Landscape	H	7.7375	-2.97	0	-2.97	7.8415	-42.49	-41.3	-1.19
0	9	2	125	Landscape	H	8.2335	-6.81	0	-6.81	8.1765	-42.62	-41.3	-1.32
0	9	3	125	Landscape	H	8.2305	-6.42	0	-6.42	8.2465	-42.38	-41.3	-1.08
0	9	4	0	Landscape	H	8.2245	-1.05	0	-1.05	8.2265	-42.71	-41.3	-1.41
0	9	5	0	Landscape	H	7.7395	-1.89	0	-1.89	7.8345	-42.72	-41.3	-1.42
1	9	0	125	Portrait	H	7.9835	-3.74	0	-3.74	8.1165	-42.71	-41.3	-1.41
1	9	1	125	Portrait	H	7.9805	-2.72	0	-2.72	8.0595	-42.63	-41.3	-1.33
1	9	2	125	Portrait	H	7.9925	-7.06	0	-7.06	8.1225	-42.71	-41.3	-1.41
1	9	3	125	Portrait	H	7.9895	-6.44	0	-6.44	8.1275	-42.43	-41.3	-1.13
1	9	4	0	Portrait	H	8.2255	-3.80	0	-3.80	8.0585	-42.32	-41.3	-1.02
1	9	5	0	Portrait	H	8.2275	-2.24	0	-2.24	8.1165	-42.55	-41.3	-1.25

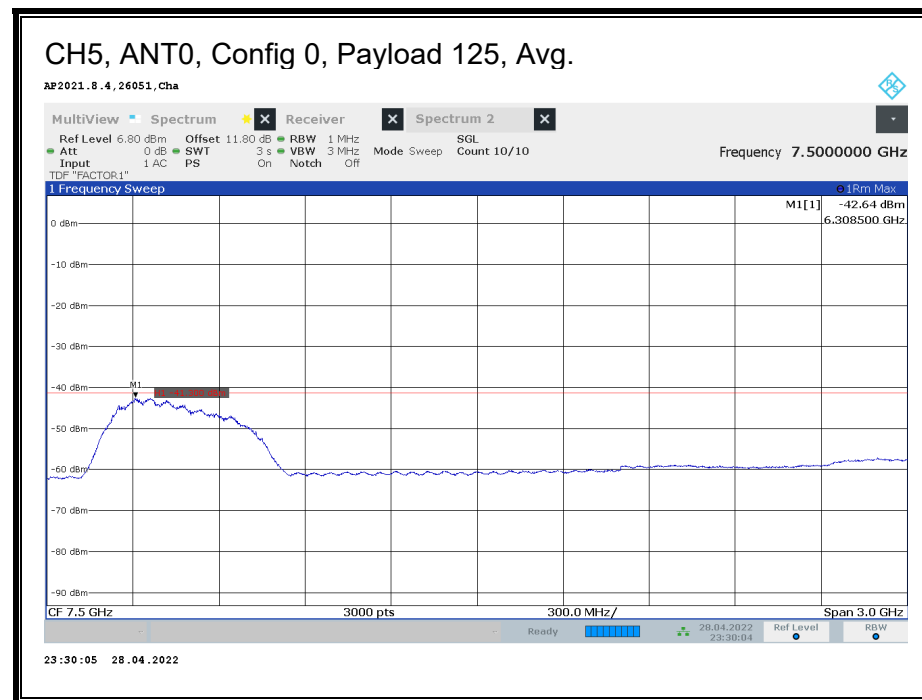
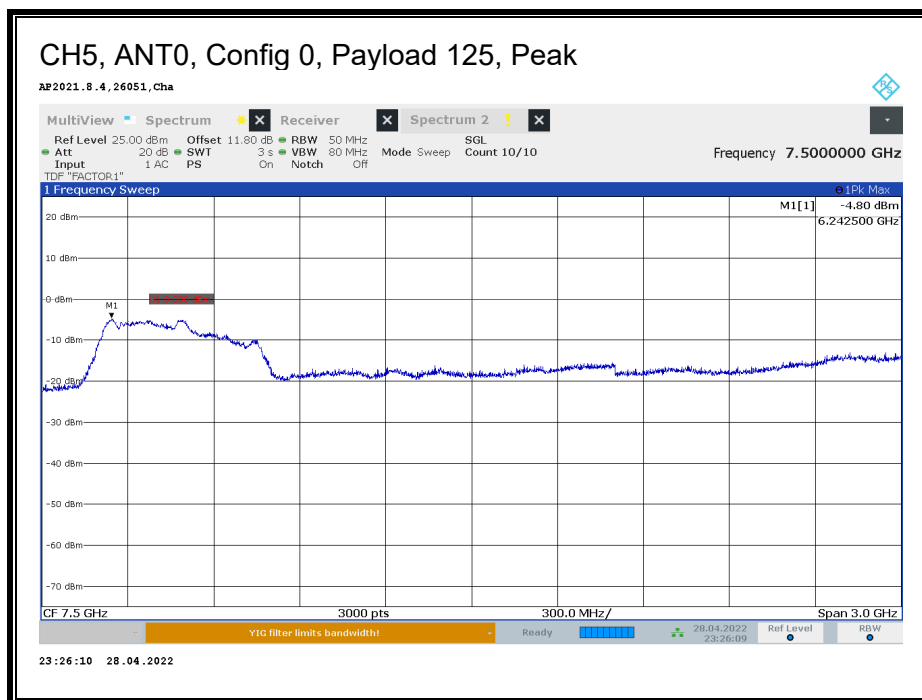
Variant Model A2889

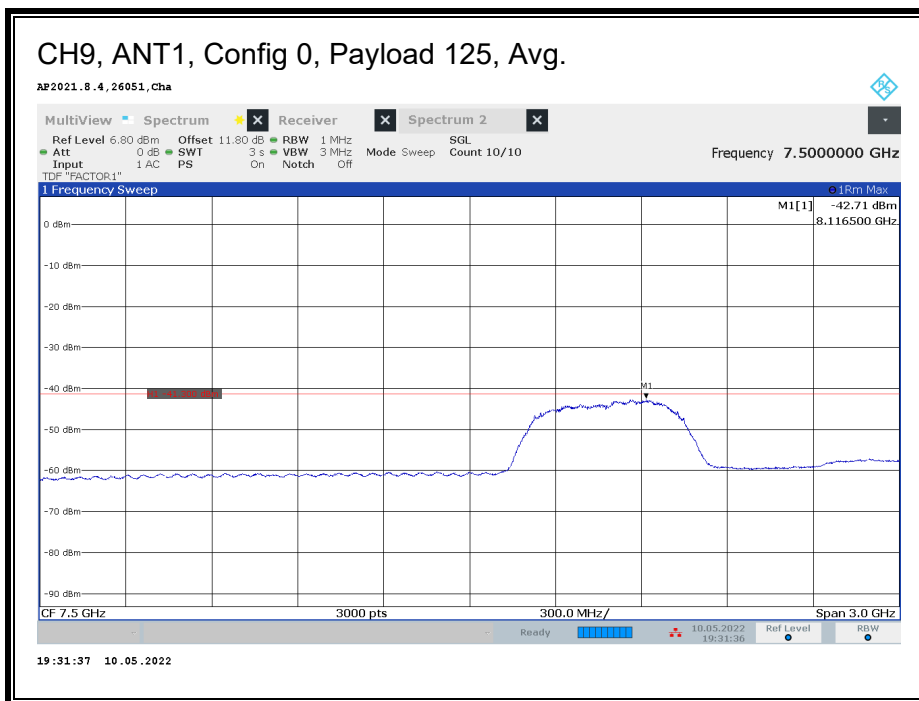
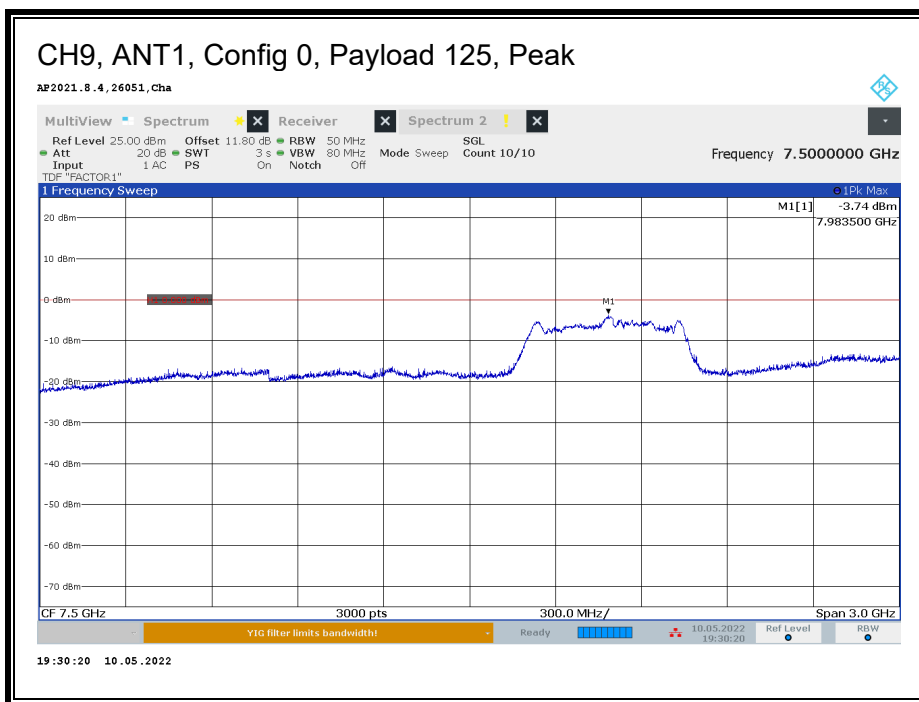
Employee IDs: 24943, 24947

Location: Chamber D

Test Date: 06/21/2022 – 6/23/2022

ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant. Polarity	Peak EIRP Power				Average EIRP Power			
						FM (GHz)	Peak Power (dBm/50MHz)	Peak Limit (0 dBm/50 MHz)	Margin (dB)	FM (GHz)	Avg Power (dBm/MHz)	Avg Limit (dBm/MHz)	Margin (dB)
1	9	0	125	Portrait	H	7.9995	-3.92	0	-3.92	8.0115	-42.72	-41.3	-1.42
1	9	1	125	Portrait	H	7.9885	-3.15	0	-3.15	8.0115	-42.69	-41.3	-1.39
1	9	2	125	Portrait	H	7.9925	-5.97	0	-5.97	8.0085	-42.57	-41.3	-1.27
1	9	3	125	Portrait	H	7.9895	-7.65	0	-7.65	8.1825	-43.03	-41.3	-1.73
1	9	4	0	Portrait	H	8.2375	-2.89	0	-2.89	8.1825	-42.73	-41.3	-1.43
1	9	5	0	Portrait	H	8.2295	-1.80	0	-1.80	8.1815	-43.75	-41.3	-2.45

PEAK POWER AND MAXIMUM AVERAGE EMISSIONS**Parent Model**



9.4. CESSATION TIME

LIMITS

FCC

§15.519(a)(1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

RSS-220

Section 5.3.1 (b) The device is to transmit only when it is sending information to an associated receiver. The device shall cease transmission of information within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB device at least every 10 seconds or the UWB device shall cease transmitting any information other than periodic signals used for the establishment or re-establishment of a communication link with an associated receiver.

TEST PROCEDURES

* Initiator = EUT

* Responder = associated receiver

Transmissions are monitored for two cases:

1. The Initiator ends the UWB link.
2. The Responder ends the UWB link.

RESULTS

Results for both the parent and variant A2889 models are shown below.

Parent and Variant A2889 Models

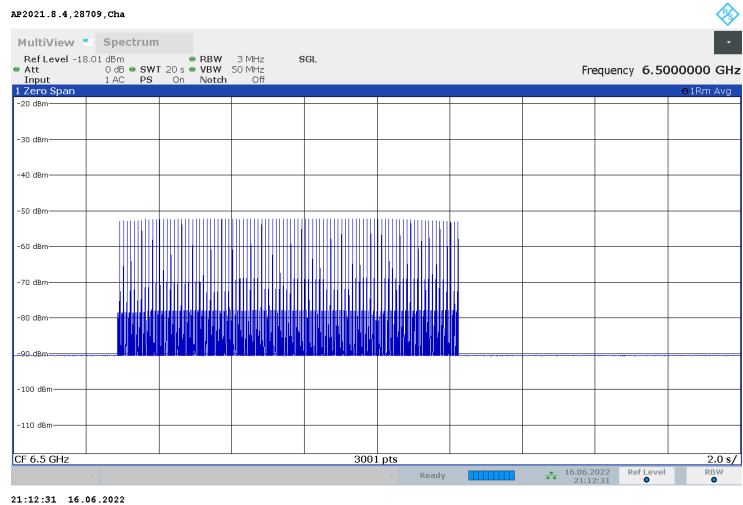
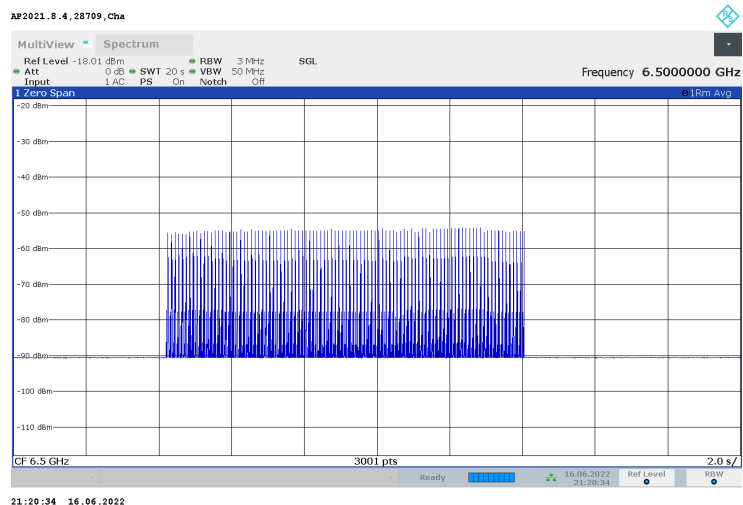
Employee ID: 12471

Location: Chamber D

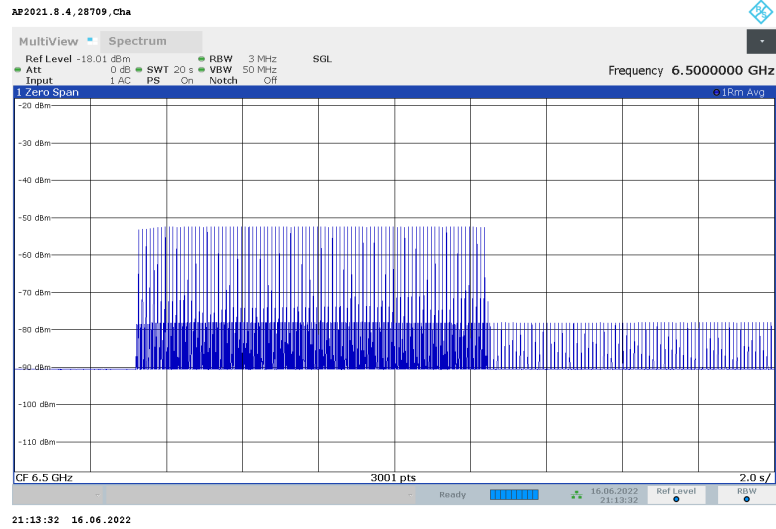
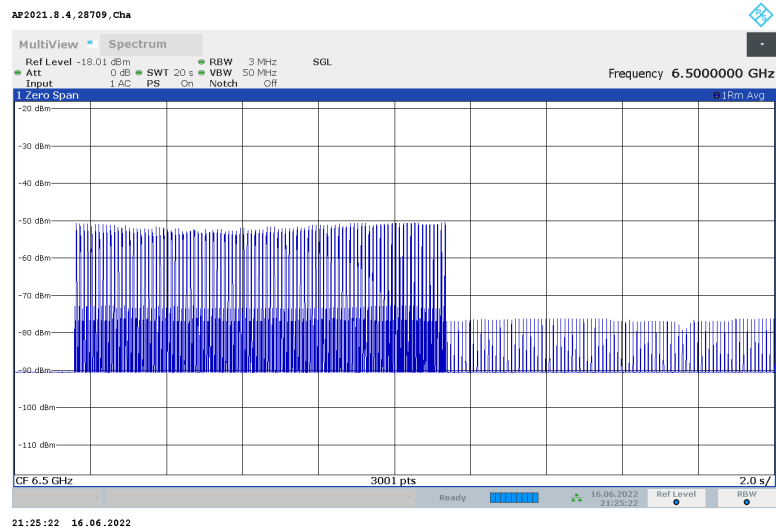
Test Date: 06/16/2022

Signal Levels on all Plots

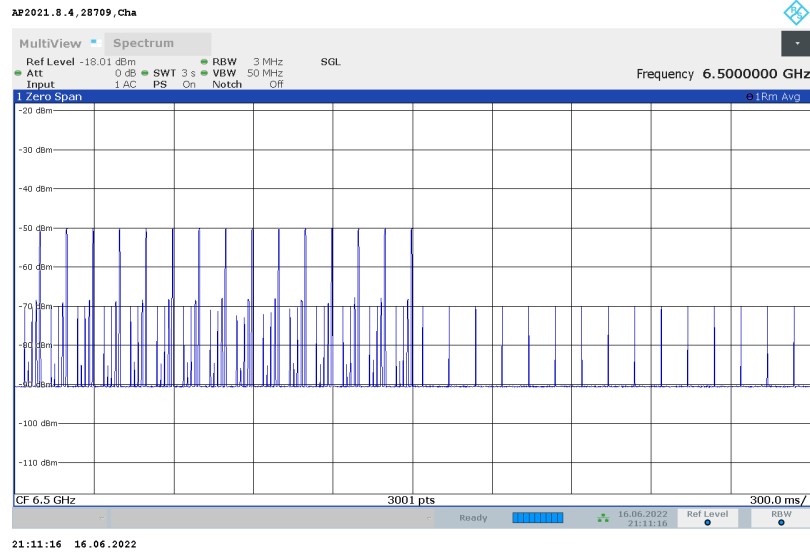
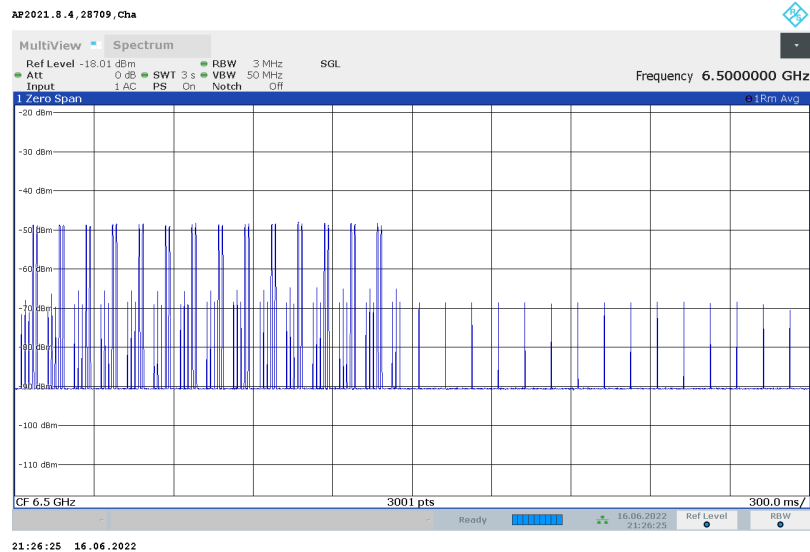
- Initiator is Low Amplitude
- Responder is High Amplitude

Case 1: Initiator ends the UWB link**Parent Model****Variant Model A2889****RESULT**

- All devices, including the Responder, cease transmissions

Case 2: Responder ends the UWB link**Parent Model****Variant Model A2889****RESULT**

- Responder ends the link, Initiator stops Acknowledgements but continues Polling.
- Responder ceases transmissions, does not respond to Polling Signals.

Zoom-in Plot during On-Off Transition**Parent Model****Variant Model A2889****RESULT**

- Shows Link Traffic, Acknowledgements and Polling Signals while Link is established
- Shows Polling Signals after Link has ended

9.5. EMISSIONS BELOW 960 MHz

LIMITS

FCC

§15.519 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

15.209 (a)

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3

RSS-220

Section 3.4 Radiated emissions at or below 960 MHz for all subclasses of UWB device shall not exceed the following limits. Measurements of radiated emissions at and below 960 MHz are to be made using a CISPR quasi-peak detector. CISPR measurement bandwidth specifications are to be used.

Frequency (MHz)	Field Strength (Microvolts/m)	Measurement Distance (Metres)	E.i.r.p. (dBmW)
0.009-0.490	2,400/F (F in kHz)	300	$10 \log (17.28 / F^2)$ (F in kHz)
0.490-1.705	24,000/F (F in kHz)	30	$10 \log (17.28 / F^2)$ (F in kHz)
1.705-30	30	30	-45.7
30-88	100	3	-55.2
88-216	150	3	-51.7
216-960	200	3	-49.2

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average emissions detector.

TEST PROCEDURE

ANSI C63.10 Clause 10.2

RSS-220 Annex

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 3m from the EUT.

For below 30 MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 meter open area test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

A final test is made at any frequencies at which emissions are found. During this final scan, the antenna is kept no further from the EUT than the maximum distance calculated for each band that yields a minimum system noise floor.

RESULTS

Results for both the parent and variant A2889 models are shown below.

Emissions Summary**Parent Model**

Employee IDs: 24943, 19185

Location: Chamber F

Test Date: 04/28/2022

Ant	CH	Config	Payload	Power Setting	Frequency Range	
					9 kHz - 30 MHz	30 - 960 MHz
0	5	3	125	Max	PASS	PASS
0	9	3	125	Max	PASS	PASS
1	9	3	125	Max	PASS	PASS

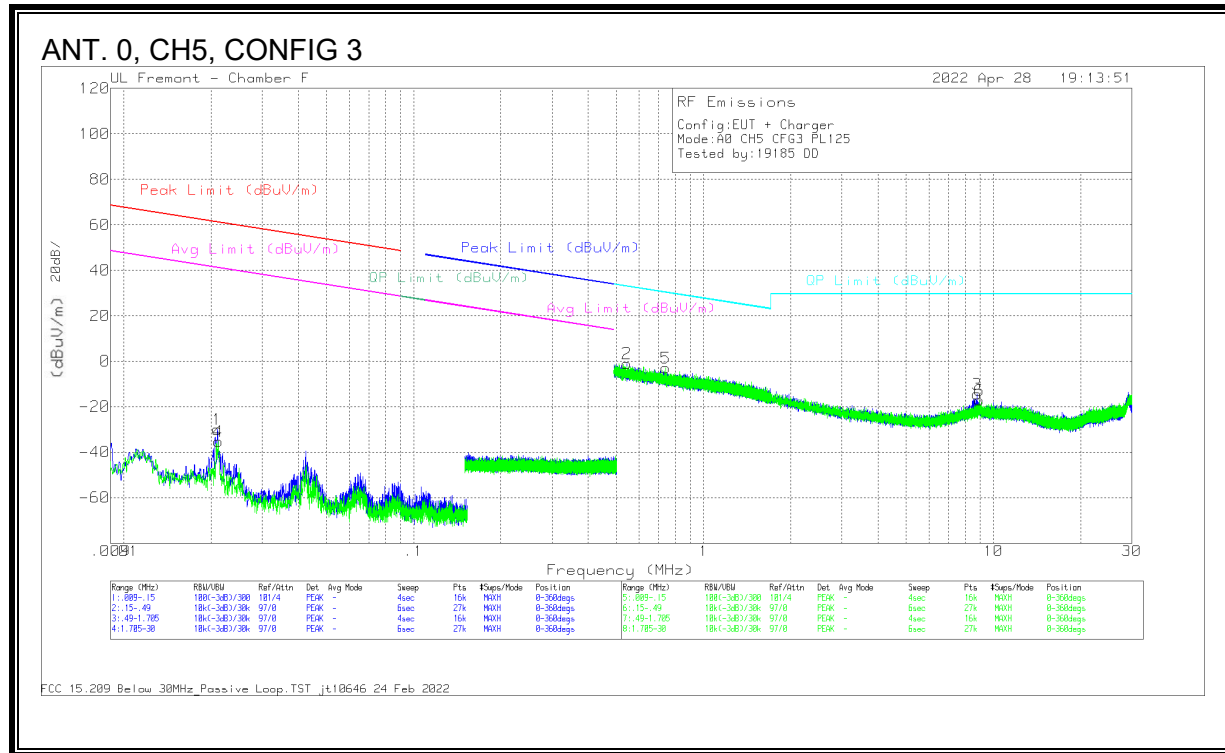
Variant Model A2889

Employee ID: 19223

Location: Chamber F

Test Date: 06/21/2022

Ant	CH	Config	Payload	Power Setting	Frequency Range	
					9 kHz - 30 MHz	30 - 960 MHz
1	9	3	125	Max	PASS	PASS

9.5.1. EMISSIONS, 9 kHz – 30 MHz**Parent****Trace Markers**

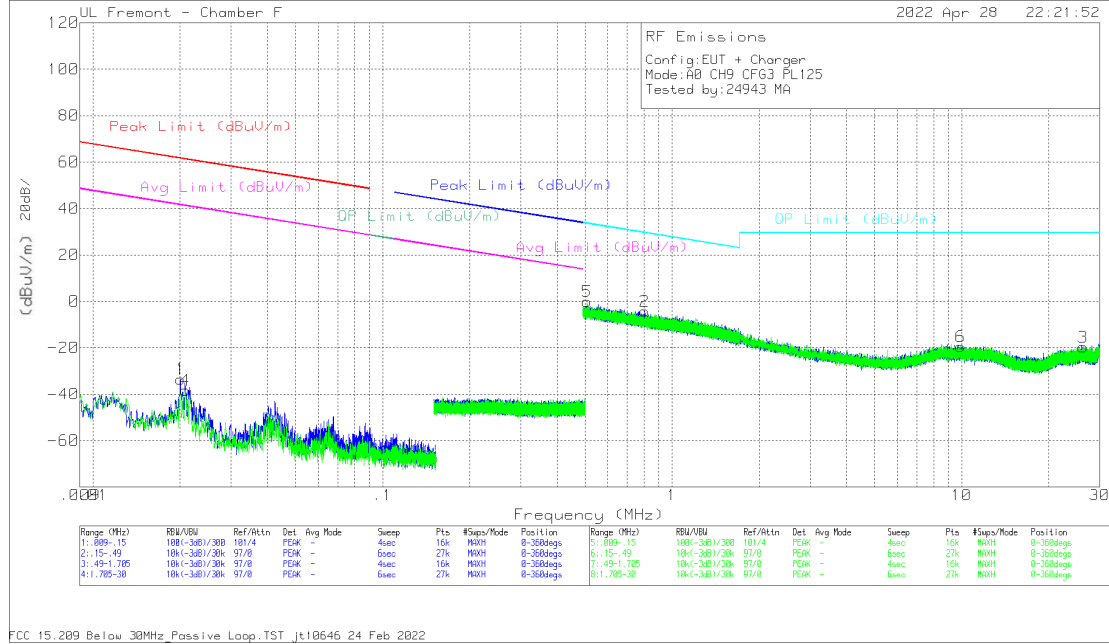
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
1	.021	22.98	Pk	58.9	-31.9	-80	-30.02	61.12	-91.14	41.12	-71.14	0-360	On
4	.0212	17.71	Pk	58.9	-31.9	-80	-35.29	61.06	-96.35	41.06	-76.35	0-360	Off

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
2	.5449	19.95	Pk	51.7	-32.6	-40	-9.5	32.88	-33.83	0-360	On
3	8.7685	23.43	Pk	34.7	-32.6	-40	-14.47	29.5	-43.97	0-360	On
5	.7415	20.56	Pk	49	-32.6	-40	-3.04	30.21	-33.25	0-360	Off
6	8.9362	20.89	Pk	34.7	-32.6	-40	-17.01	29.5	-46.51	0-360	Off

Pk - Peak detector

ANT. 0, CH9, Config 3



Trace Markers

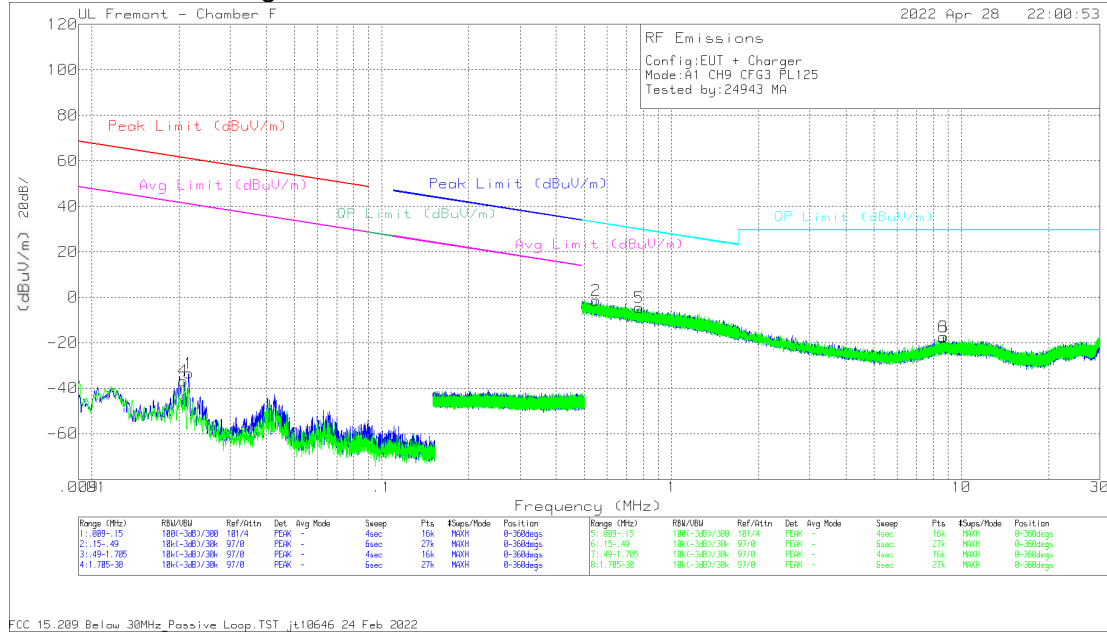
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
1	.02	19.4	Pk	59	-31.9	-80	-33.5	61.55	-95.05	41.55	-75.05	0-360	On
4	.0208	14.61	Pk	58.9	-31.9	-80	-38.39	61.21	-99.6	41.21	-79.6	0-360	Off

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
2	.8054	19.94	Pk	48.4	-32.6	-40	-4.26	29.5	-33.76	0-360	On
3	26.2638	19.28	Pk	33.6	-32.6	-40	-19.72	29.5	-49.22	0-360	On
5	.5078	20.24	Pk	52.3	-32.6	-40	-.06	33.49	-33.55	0-360	Off
6	9.9255	18.25	Pk	34.9	-32.6	-40	-19.45	29.5	-48.95	0-360	Off

Pk - Peak detector

ANT. 1, CH9, Config 3



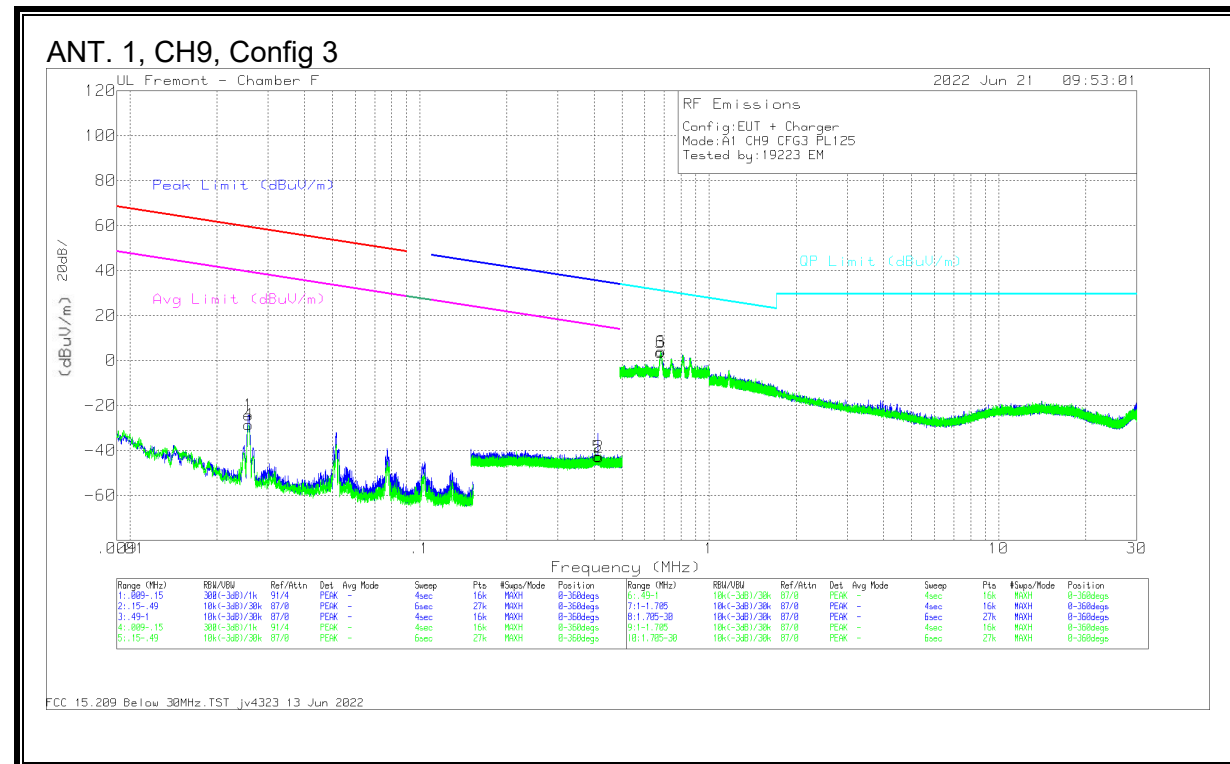
Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
1	.0216	19.73	Pk	58.8	-31.9	-80	-33.37	60.9	-94.27	40.9	-74.27	0-360	On
4	.0207	16.3	Pk	58.9	-31.9	-80	-36.7	61.25	-97.95	41.25	-77.95	0-360	Off

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
2	.5483	19.64	Pk	51.6	-32.6	-40	-1.36	32.83	-34.19	0-360	On
3	8.6574	20.32	Pk	34.8	-32.6	-40	-17.48	29.5	-46.98	0-360	On
5	.7742	19.27	Pk	48.7	-32.6	-40	-4.63	29.84	-34.47	0-360	Off
6	8.67	20.36	Pk	34.8	-32.6	-40	-17.44	29.5	-46.94	0-360	Off

Pk - Peak detector

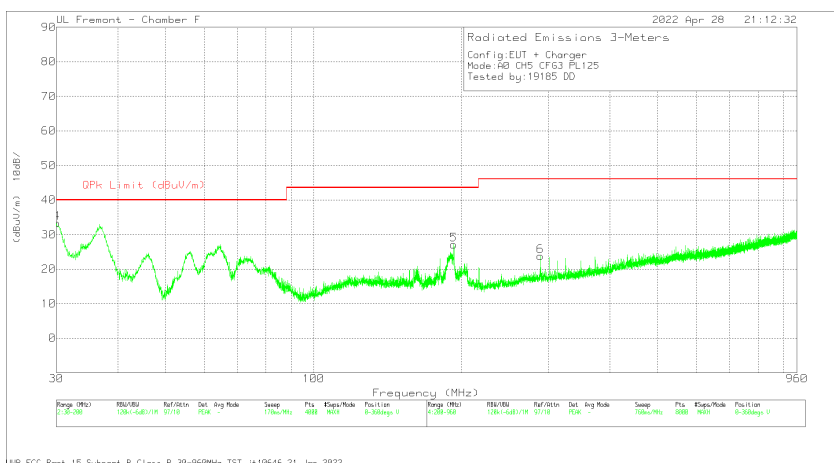
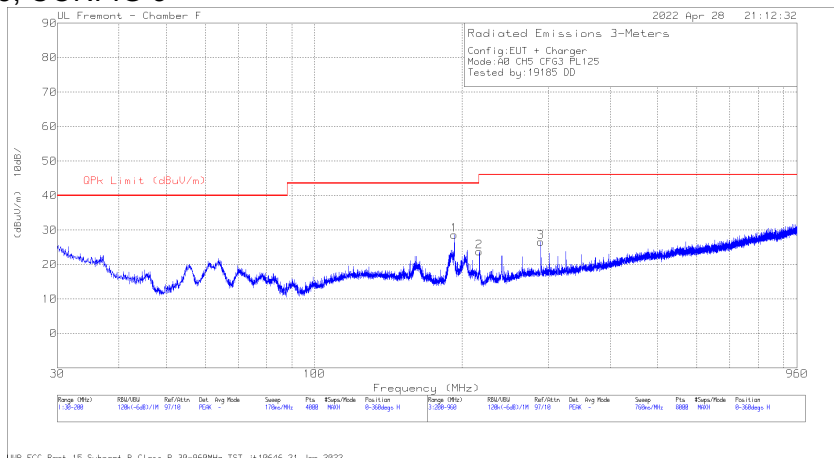
A2889 Variant**Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
1	.0257	29.44	Pk	58.4	-32.1	-80	-24.26	59.39	-83.65	39.39	-63.65	-	-	-	-	0-360	On
2	.4168	13.49	Pk	56.2	-32.6	-80	-42.91	-	-	-	-	35.21	-78.12	15.21	-58.12	0-360	On
4	.0257	24.94	Pk	58.5	-32.1	-80	-28.66	59.4	-88.06	39.4	-68.06	-	-	-	-	0-360	Off
5	.4128	13.67	Pk	56.2	-32.6	-80	-42.73	-	-	-	-	35.29	-78.02	15.29	-58.02	0-360	Off

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Amp/Cbl (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Face
3	.6788	19.75	Pk	56.4	-32.6	-40	3.55	30.98	-27.43	0-360	On
6	.6819	20.23	Pk	56.4	-32.6	-40	4.03	30.94	-26.91	0-360	Off

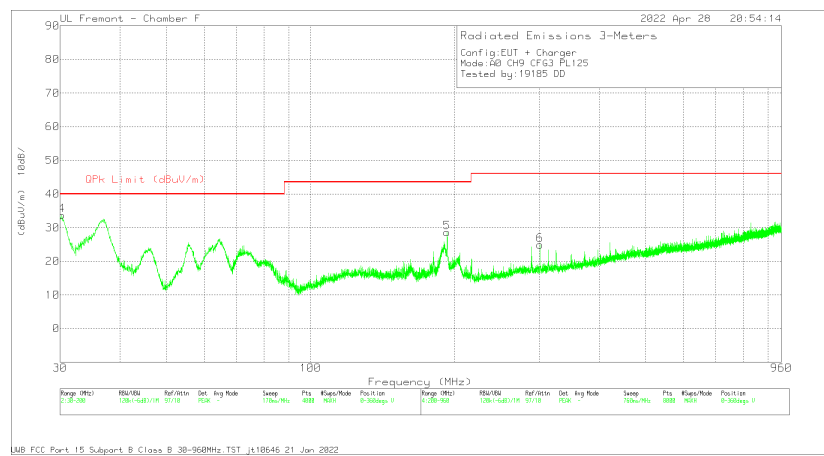
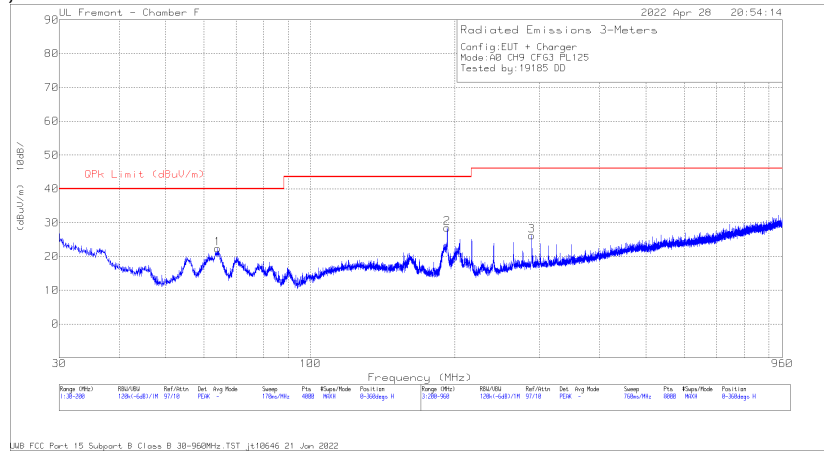
Pk - Peak detector

9.5.2. EMISSIONS, 30 - 960 MHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 204044 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	192.732	41.38	Pk	18.2	-31	28.58	43.52	-14.94	0-360	101	H
4	30.0425	37.59	Pk	27.7	-32	33.29	40	-6.71	0-360	100	V
5	192.69	39.9	Pk	18.2	-31	27.1	43.52	-16.42	0-360	100	V
2	216.627	37.04	Pk	17.4	-30.7	23.74	46.02	-22.28	0-360	99	H
3	288.931	37	Pk	20.1	-30.5	26.6	46.02	-19.42	0-360	99	H
6	289.026	34.17	Pk	20.1	-30.5	23.77	46.02	-22.25	0-360	99	V

Pk - Peak detector

ANT. 0, CH9, CONFIG 3



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 204044 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	64.1788	39.91	Pk	14.2	-31.7	22.41	40	-17.59	0-360	199	H
2	192.69	41.24	Pk	18.2	-31	28.44	43.52	-15.08	0-360	101	H
4	30.2551	38.06	Pk	27.6	-32	33.66	40	-6.34	0-360	101	V
5	192.69	41.43	Pk	18.2	-31	28.63	43.52	-14.89	0-360	101	V
3	289.026	36.64	Pk	20.1	-30.5	26.24	46.02	-19.78	0-360	101	H
6	301.093	35.2	Pk	20.2	-30.5	24.9	46.02	-21.12	0-360	101	V

Pk - Peak detector

UL Front - Chamber F

2022 Apr 28 21:27:11

Radiated Emissions 3-Meters

Config: EUT + Charger
 Mode: A1 CH9 CF63 PL125
 Tested by: 24943 MA

Y-axis: (dBu/m)

X-axis: Frequency (MHz)

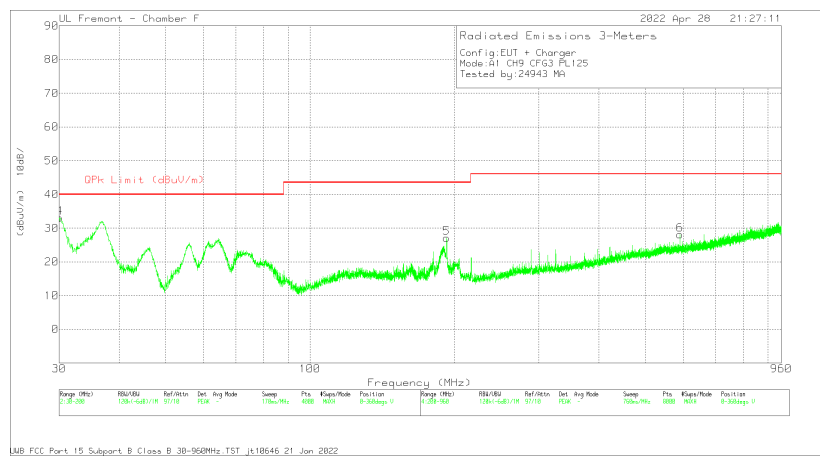
Red line: GPR Limit (dBu/m)

Blue line: Measured signal

Peaks labeled: G1, G2, G3

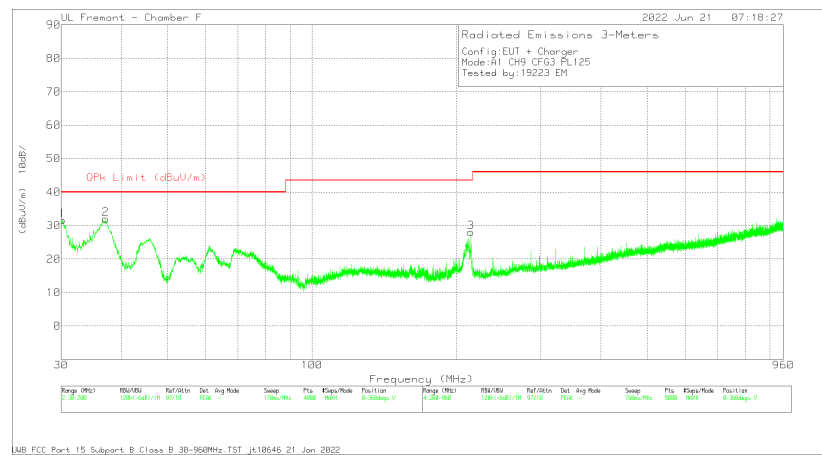
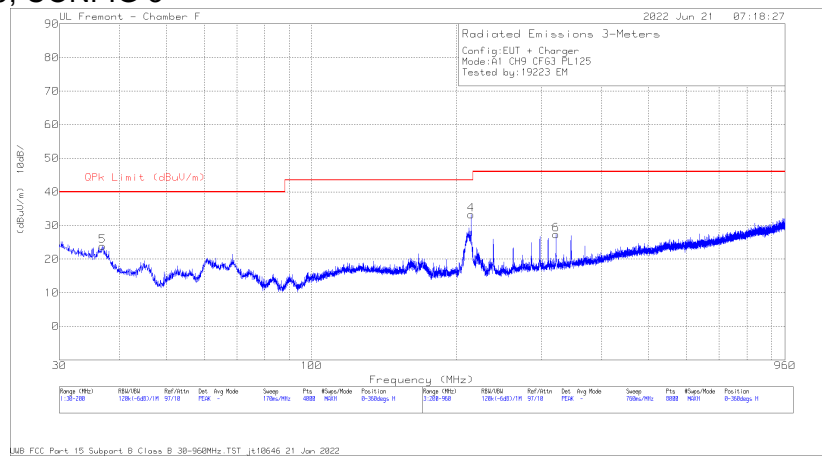
Range (MHz)	Min/Max	Avg/Std	Unit	Pre	Max/Min	Position	Range (MHz)	Min/Max	Avg/Std	Unit	Pre	Max/Min	Position
30-100	126/-64	17/19	µV	100MHz	400	800	100-300	126/-64	17/19	µV	100MHz	900	800
E-300µV H													

LAB FCC Part 15 Support B Class B 30-960MHz TST (410646 21 Jan 2022)



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 204044 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	192.732	41.37	Pk	18.2	-31	28.57	43.52	-14.95	0-360	101	H
4	30.0425	37.38	Pk	27.7	-32	33.08	40	-6.92	0-360	101	V
5	192.732	39.84	Pk	18.2	-31	27.04	43.52	-16.48	0-360	101	V
2	216.722	37.28	Pk	17.4	-30.7	23.98	46.02	-22.04	0-360	101	H
3	289.121	34.49	Pk	20.1	-30.5	24.09	46.02	-21.93	0-360	101	H
6	590.119	32.01	Pk	25.5	-29.4	28.11	46.02	-17.91	0-360	99	V

Page 35 of 78

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 204044 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	36.8868	33.12	Pk	22.8	-32	23.92	40	-16.08	0-360	300	H
1	30.17	36.01	Pk	27.6	-32	31.61	40	-8.39	0-360	101	V
2	37.1419	41.36	Pk	22.6	-32	31.96	40	-8.04	0-360	101	V
4	214.347	46.71	Pk	17.4	-30.9	33.21	43.52	-10.31	0-360	101	H
6	321.52	37.08	Pk	20.6	-30.3	27.38	46.02	-18.64	0-360	101	H
3	214.442	41.41	Pk	17.4	-30.8	28.01	43.52	-15.51	0-360	101	V

Pk - Peak detector

9.6. AVERAGE EMISSIONS ABOVE 960 MHz**LIMITS****FCC**

15.519 (c)

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

§15.519 (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

RSS-220

Section 5.3.1 (d) Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Hand-held (Outdoor) Communication, Measurement, Location Sensing, and Tracking Devices	
Frequency	E.i.r.p. in a Resolution Bandwidth of 1 MHz
960-1 610 MHz	-75.3 dBm
1.61-4.75 GHz	-70.0 dBm
4.75-10.6 GHz	-41.3 dBm
Above 10.6 GHz	-61.3 dBm

Section 5.3.1 (e) In addition to the limits specified in paragraph (d) of this section, radiated emissions shall not exceed the following average limits when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.

Frequency	E.i.r.p. in a Resolution Bandwidth of no less than 1 kHz
1 164-1 240 MHz	-85.3 dBm
1 559-1 610 MHz	-85.3 dBm

TEST PROCEDURE

ANSI C63.10 Clause 10.3.

RSS-220 Annex

Exploratory measurements for all frequency ranges are performed with the measurement antenna at close distances to the EUT as described in ANSI C63.10 6.6.4.2. Where emissions are observed the measurement antenna is then positioned at a height of 1.5m and a distance of 1m for 18-40GHz and 0.5m for 0.96-6GHz, 1.164-1.240GHz, and 1.559-1.610GHz from the EUT and final measurements are made at the frequencies observed in the exploratory scans using the alternative measurement procedures detailed in ANSI C63.10 section 6.6.5. If no emissions are observed, a plot is made at a test distance of 1m for 18-40GHz and 0.5m for 0.96-6GHz, 1.164-1.240GHz, and 1.559-1.610GHz from the EUT to show the measurement system noise floor.

PROCEDURE FOR 0.96 TO 6 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

A low pass filter with a cut off frequency of 6 GHz is used to suppress the fundamental and perform measurement for 0.96 - 6 GHz.

Distance Correction Factor from 3m to 0.5m = $20 \cdot \log(0.5\text{m}/3\text{m}) = -15.56 \text{ dB}$

RESULTS FOR 6 GHz TO 9 GHz

The 6 - 9 GHz frequency band is covered in Section 9.3.

PROCEDURE FOR 9 GHz TO 18 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

A high pass filter with pass band frequency beyond 9 GHz is used to suppress the fundamental and perform measurement for 9 - 18 GHz.

Distance Correction Factor from 3m to 0.5m = $20 \cdot \log(0.5\text{m}/3\text{m}) = -15.56 \text{ dB}$

PROCEDURE FOR 1.164 TO 1.240 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

RBW = 120 kHz & VBW = 360 kHz were used at pre-scan.

A low pass filter with a cut off frequency of 6 GHz is used to suppress the fundamental and perform measurement for 1.164 – 1.240 GHz.

Distance Correction Factor from 3m to 0.5m = $20 \cdot \log(0.5\text{m}/3\text{m}) = -15.56 \text{ dB}$

PROCEDURE FOR 1.559 TO 1.610 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

RBW = 120 kHz & VBW = 360 kHz were used at pre-scan.

A low pass filter with a cut off frequency of 6 GHz is used to suppress the fundamental and perform measurement for 1.559 – 1.610 GHz.

Distance Correction Factor from 3m to 0.5m = $20 \cdot \log(0.5\text{m}/3\text{m}) = -15.56 \text{ dB}$

PROCEDURE FOR 18 GHz TO 40 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 1m from the EUT.

A final test is made at any frequencies at which emissions are found. During this final scan, the antenna is kept no further from the EUT than the maximum distance calculated for each band that yields a minimum system noise floor.

Distance Correction Factor from 3m to 1m = $20 \cdot \log(1\text{m}/3\text{m}) = -9.54 \text{ dB}$

RESULTS

Results for both the parent and variant A2889 models are shown below.

Average Emissions Summary**Parent Model**

Employee IDs: 24943, 19185, 12471

Location: Chamber F

Test Date: 04/28/2022 – 06/15/2022

Ant	CH	Config	Payload	Power Setting	Frequency Ranges				
					1164 - 1240 MHz	1559 - 1610 MHz	0.96 - 18 GHz	18 - 26.5 GHz	26.5 - 40 GHz
0	5	3	125	Max	PASS	PASS	PASS	PASS	PASS
0	9	3	125	Max	PASS	PASS	PASS	PASS	PASS
1	9	3	125	Max	PASS	PASS	PASS	PASS	PASS

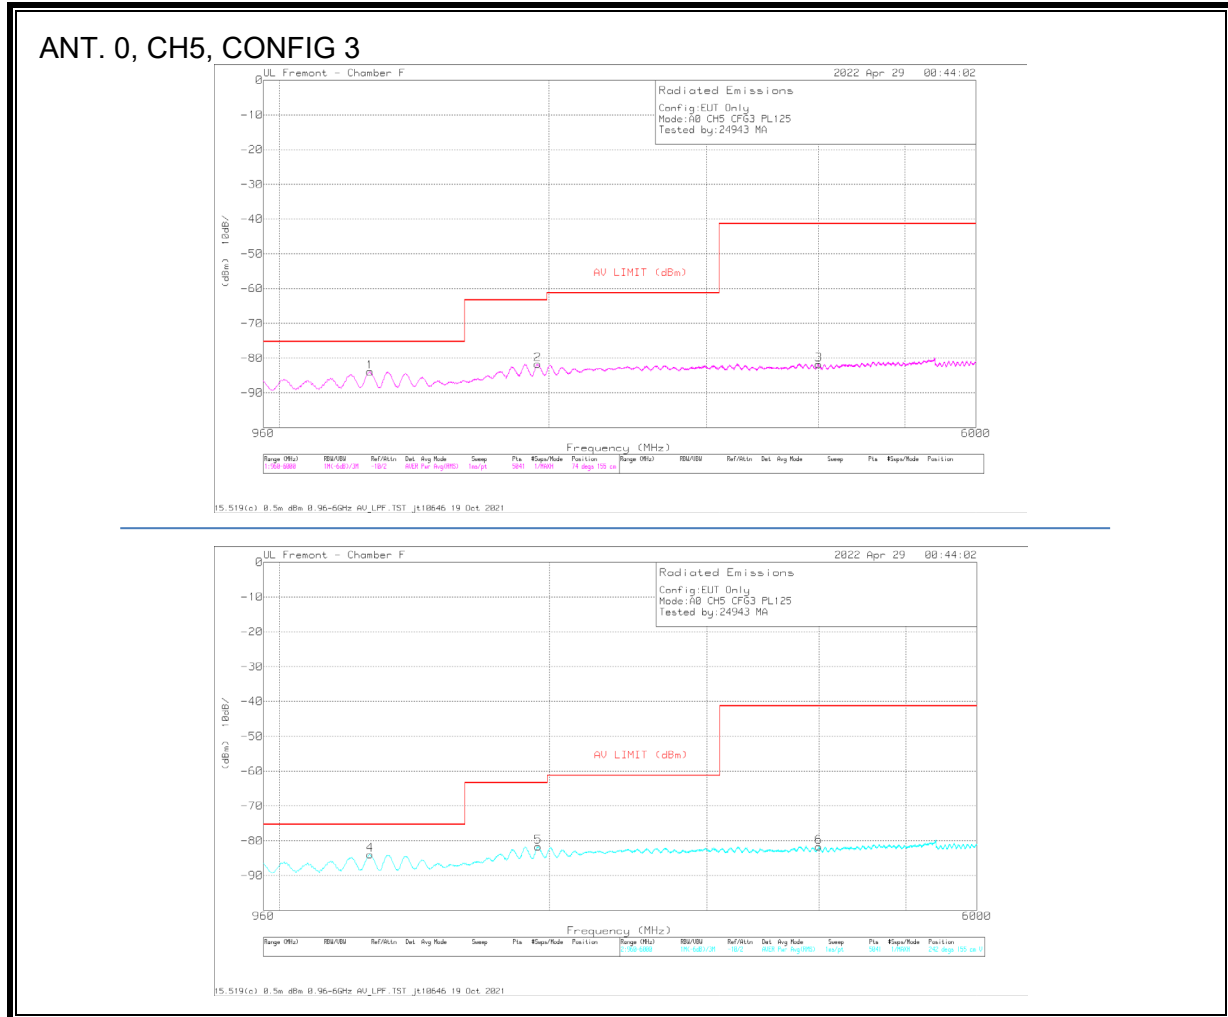
Variant Model A2889

Employee ID: 19223

Location: Chamber F

Test Date: 06/21/2022

Ant	CH	Config	Payload	Power Setting	Frequency Ranges				
					1164 - 1240 MHz	1559 - 1610 MHz	0.96 - 18 GHz	18 - 26.5 GHz	26.5 - 40 GHz
1	9	3	125	Max	PASS	PASS	PASS	PASS	PASS

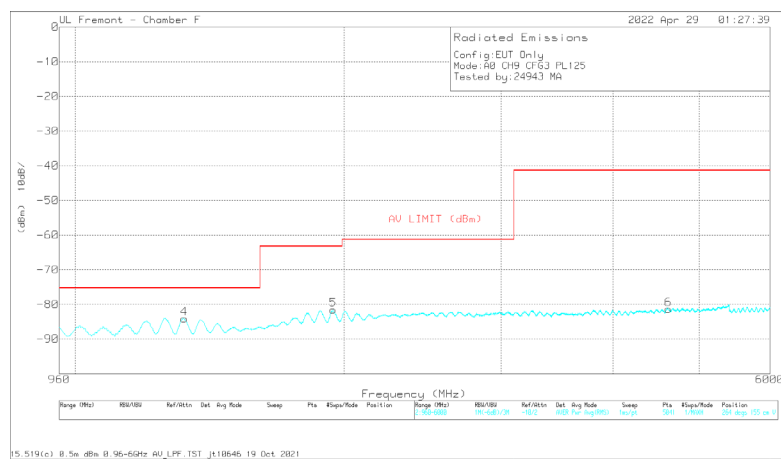
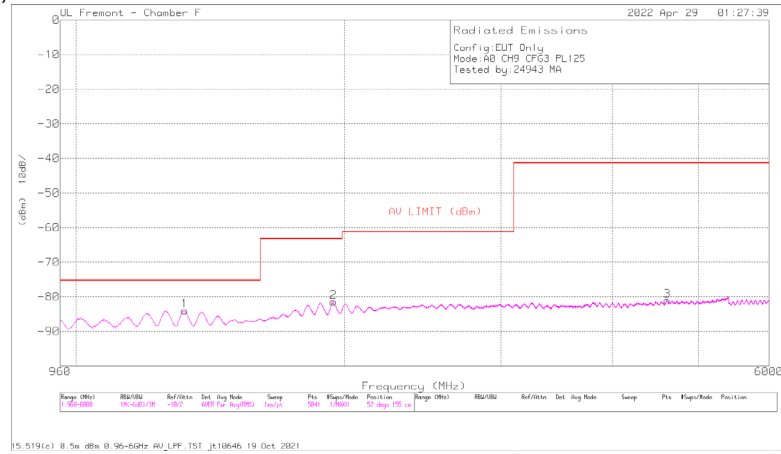
9.6.1. AVERAGE EMISSIONS, 0.96 – 6 GHz**FCC15.519 (C)****Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dBm)	Ampl/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LFF (dB)	EIRP (dBm)	FCC15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1263	-60.92	RMS	29.6	-48.9	-15.6	11.8	.1	-83.92	-75.3	-8.62	295	155	H
2	1944	-61.2	RMS	32.1	-49.2	-15.6	11.8	.4	-81.7	-63.3	-18.4	52	155	H
3	4004	-65.09	RMS	33.8	-47.2	-15.6	11.8	.5	-81.79	-41.3	-40.49	316	155	H
4	1262	-60.96	RMS	29.5	-48.8	-15.6	11.8	.1	-83.96	-75.3	-8.66	176	155	V
5	1944	-61.15	RMS	32.1	-49.2	-15.6	11.8	.4	-81.65	-63.3	-18.35	88	155	V
6	3996	-65.06	RMS	33.8	-47.1	-15.6	11.8	.5	-81.66	-41.3	-40.36	242	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH5 fundamental signal.

ANT. 0, CH9, CONFIG 3



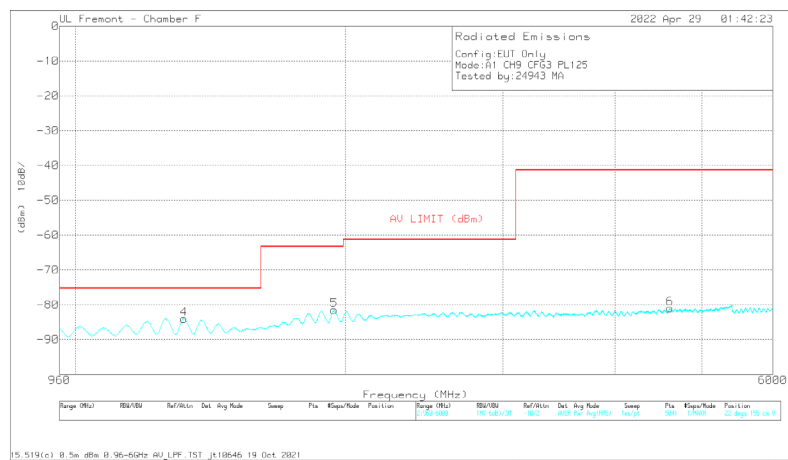
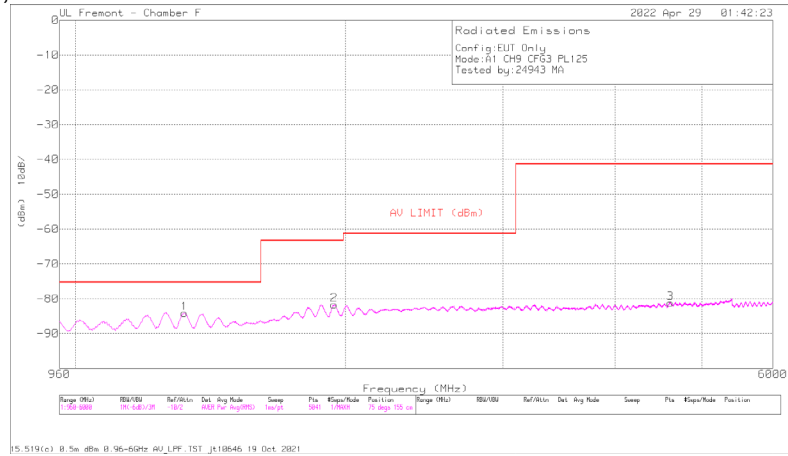
Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	18186 LFP (dBm)	EIRP (dBm)	FC15.519(C) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1324	-60.86	RMS	29.5	-48.9	-15.6	11.8	.1	-83.96	-75.3	-8.66	250	155	H
2	1946	-60.84	RMS	32.1	-49.2	-15.6	11.8	.3	-81.44	-63.3	-18.14	338	155	H
3	4610	-64.27	RMS	34.6	-48.2	-15.6	11.8	.6	-81.07	-41.3	-39.77	1619	155	H
4	1325	-61.08	RMS	29.5	-48.8	-15.6	11.8	.1	-84.08	-75.3	-8.78	1	155	V
5	1945	-60.81	RMS	32.1	-49.3	-15.6	11.8	.3	-81.51	-63.3	-18.21	87	155	V
6	4617	-64.54	RMS	34.6	-48.2	-15.6	11.8	.6	-81.34	-41.3	-40.04	219	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

ANT. 1, CH9, CONFIG 3

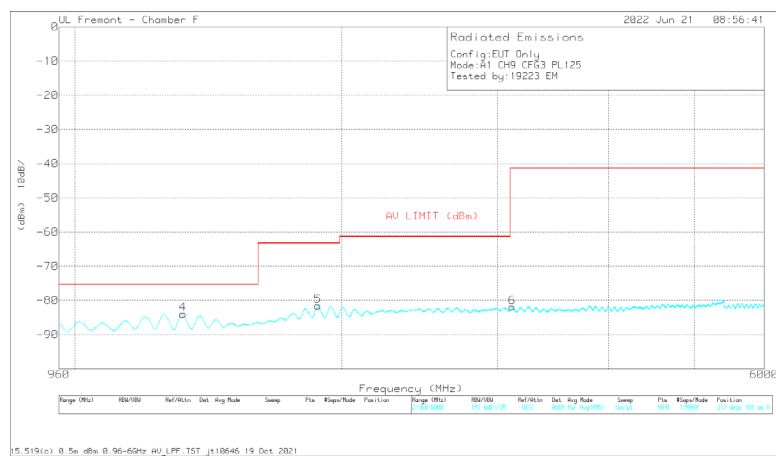
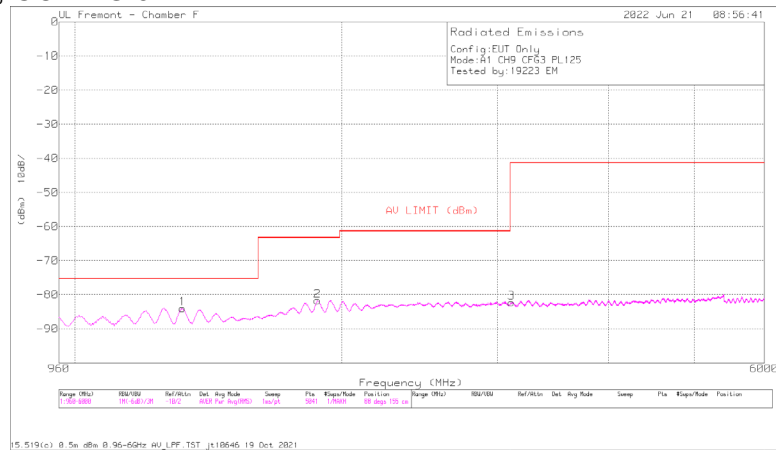


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1323	-61.16	RMS	29.5	-48.8	-15.6	11.8	.1	-84.16	-75.3	-8.86	97	155	H
2	1944	-61.2	RMS	32.1	-49.2	-15.6	11.8	.4	-81.7	-63.3	-18.4	118	155	H
3	4612	-64.51	RMS	34.6	-48.1	-15.6	11.8	.6	-81.21	-41.3	-39.91	140	155	H
4	1322	-60.96	RMS	29.5	-48.9	-15.6	11.8	.1	-84.06	-75.3	-8.76	0	155	V
5	1944	-60.99	RMS	32.1	-49.2	-15.6	11.8	.4	-81.49	-63.3	-18.19	131	155	V
6	4605	-64.39	RMS	34.6	-48	-15.6	11.8	.6	-80.99	-41.3	-39.69	0	155	V

RMS - RMS detection

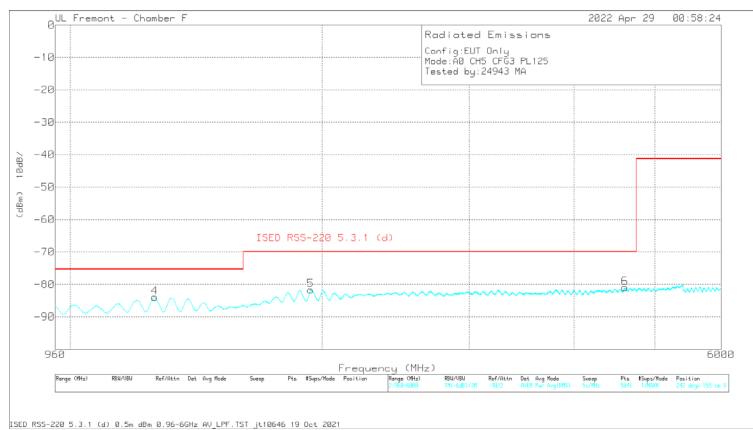
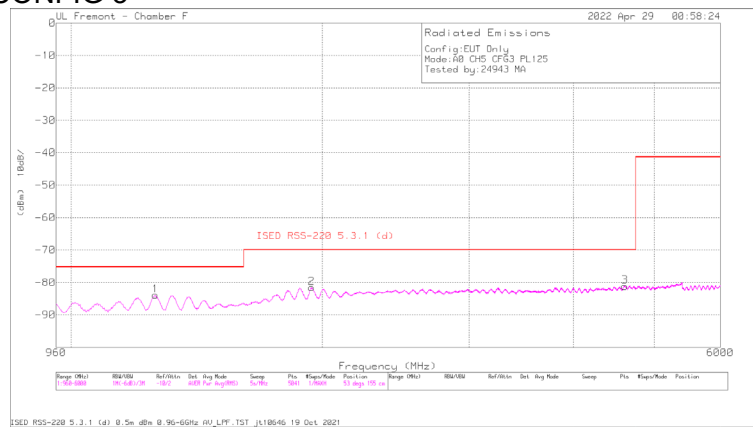
*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Amp/Cbl (dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	188196 LPF 1-6GHz	Corrected Reading (dBm)	AV LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1323	-60.99	RMS	29.5	-48.8	-15.6	11.8	.1	-83.99	-75.3	-8.69	175	155	H
2	1879	-60.91	RMS	31.9	-49.2	-15.6	11.8	.3	-81.71	-63.3	-18.41	220	155	H
3	3110	-65.06	RMS	33.3	-47	-15.6	11.8	.3	-82.26	-41.3	-40.96	242	155	H
4	1325	-60.99	RMS	29.5	-48.8	-15.6	11.8	.1	-83.99	-75.3	-8.69	360	155	V
5	1881	-60.96	RMS	31.9	-49	-15.6	11.8	.3	-81.56	-63.3	-18.26	53	155	V
6	3117	-64.73	RMS	33.3	-47	-15.6	11.8	.3	-81.93	-41.3	-40.63	360	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

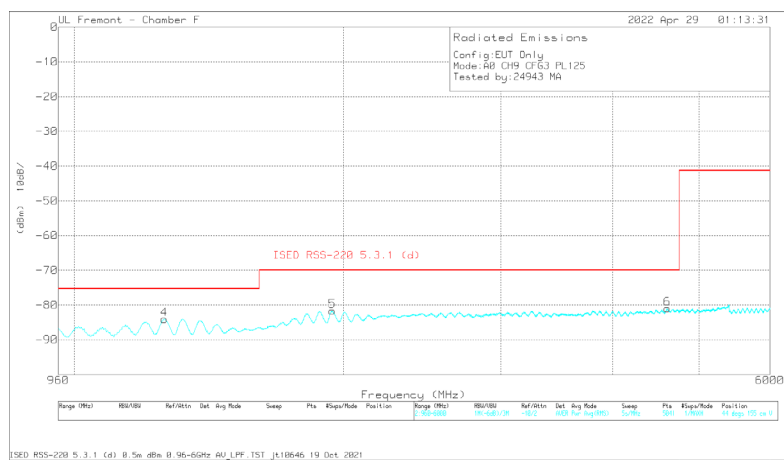
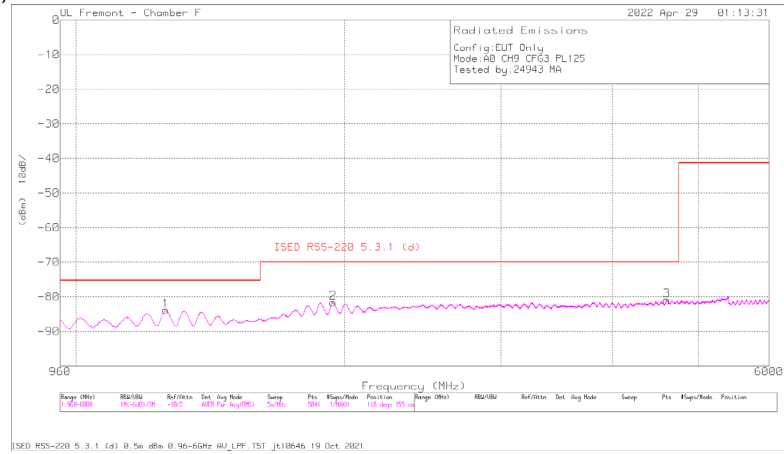
RSS-220 5.3.1 (d)**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	Corrected Reading (dBm)	ISED RSS-220 5.3.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1262	-60.9	RMS	29.5	-48.8	-15.6	11.8	.1	-83.9	-75.3	-8.6	360	155	H
2	1943	-60.88	RMS	32.1	-49.4	-15.6	11.8	.4	-81.58	-70	-11.58	53	155	H
3	4609	-64.26	RMS	34.6	-48.3	-15.6	11.8	.6	-81.16	-70	-11.16	119	155	H
4	1262	-60.92	RMS	29.5	-48.8	-15.6	11.8	.1	-83.92	-75.3	-8.62	242	155	V
5	1938	-61.18	RMS	32.1	-49.2	-15.6	11.8	.4	-81.68	-70	-11.68	198	155	V
6	4604	-64.33	RMS	34.6	-48	-15.6	11.8	.6	-80.93	-70	-10.93	330	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH5 fundamental signal.

ANT. 0, CH9, CONFIG 3



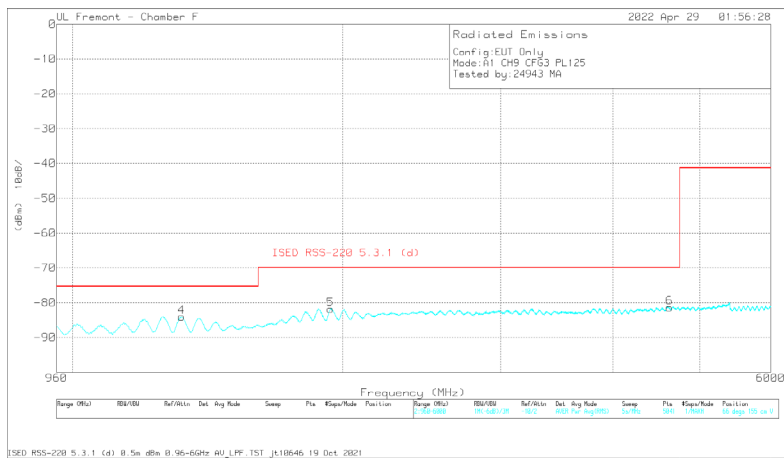
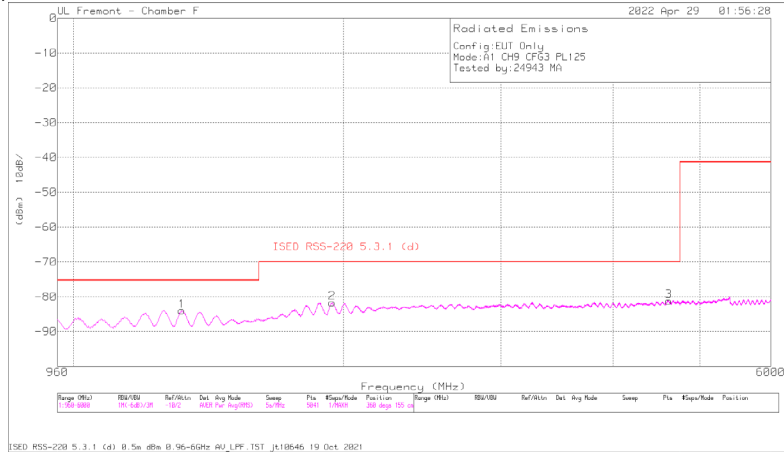
Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	Corrected Reading (dBm)	ISED RSS-220 5.3.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1261	-60.79	RMS	29.5	-48.9	-15.6	11.8	.1	-83.89	-75.3	-8.59	97	155	H
2	1944	-61.17	RMS	32.1	-49.2	-15.6	11.8	.4	-81.67	-70	-11.67	206	155	H
3	4604	-64.4	RMS	34.6	-48	-15.6	11.8	.6	-81	-70	-11	206	155	H
4	1261	-60.95	RMS	29.5	-48.9	-15.6	11.8	.1	-84.05	-75.3	-8.75	0	155	V
5	1944	-61.15	RMS	32.1	-49.2	-15.6	11.8	.4	-81.65	-70	-11.65	176	155	V
6	4606	-64.18	RMS	34.6	-48.2	-15.6	11.8	.6	-80.98	-70	-10.98	242	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

ANT. 1, CH9, CONFIG 3

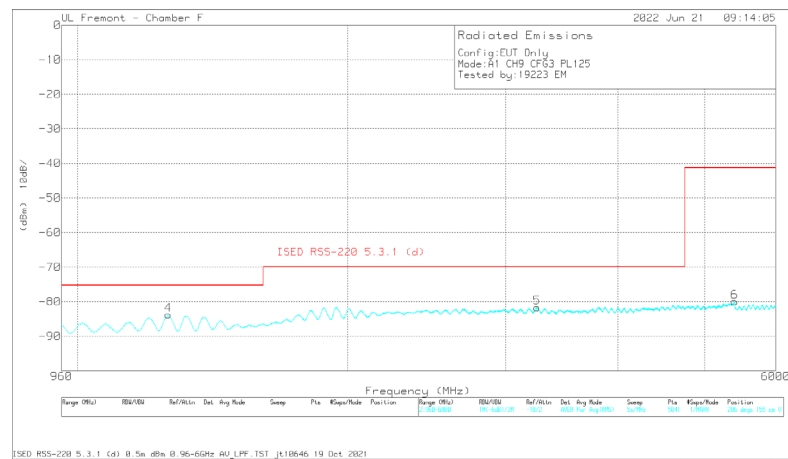
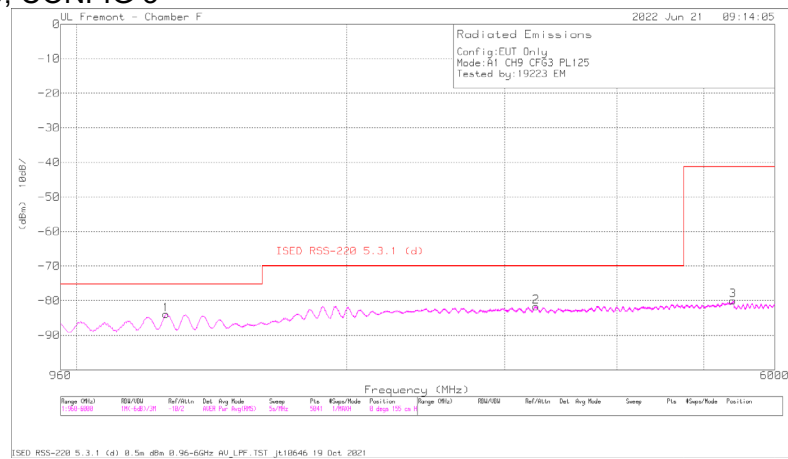


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	Corrected Reading (dBm)	ISD RSS-220 5.3.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1321	-61.02	RMS	29.5	-48.8	-15.6	11.8	.1	-84.02	-75.3	-8.72	97	155	H
2	1944	-61.19	RMS	32.1	-49.2	-15.6	11.8	.4	-81.69	-70	-11.69	141	155	H
3	4615	-64.31	RMS	34.6	-48.3	-15.6	11.8	.6	-81.21	-70	-11.21	31	155	H
4	1323	-61.04	RMS	29.5	-48.8	-15.6	11.8	.1	-84.04	-75.3	-8.74	44	155	V
5	1939	-61.13	RMS	32.1	-49.4	-15.6	11.8	.4	-81.83	-70	-11.83	132	155	V
6	4626	-64.66	RMS	34.6	-48.1	-15.6	11.8	.6	-81.36	-70	-11.36	1	155	V

RMS - RMS detection

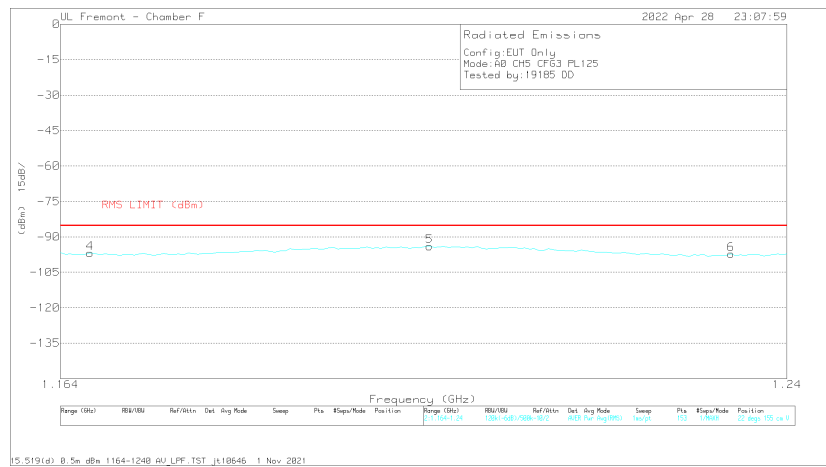
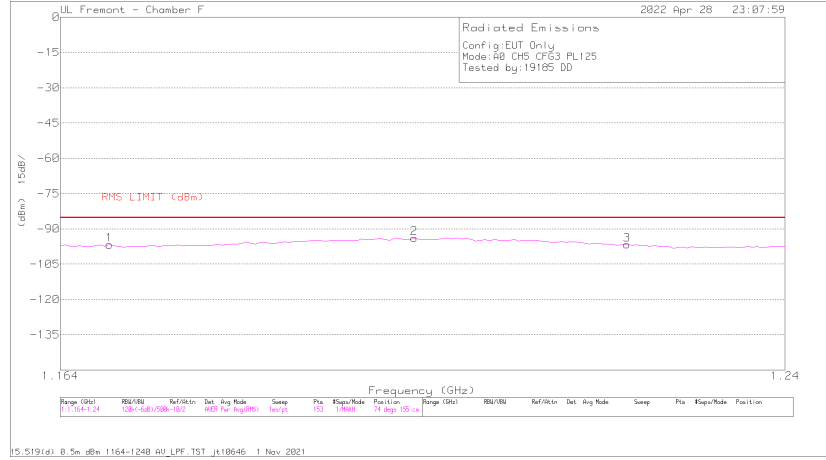
*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Amp/Cbl (dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	188196 LPF 1-6GHz	Corrected Reading (dBm)	ISED RSS-220 5.3.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1258	-60.82	RMS	29.5	-48.9	-15.6	11.8	.1	-83.92	-75.3	-8.62	0	155	H
2	3252.5	-64.67	RMS	33.3	-46.9	-15.6	11.8	.4	-81.67	-70	-11.67	220	155	H
3	5392	-65.5	RMS	35	-47.1	-15.6	11.8	1.5	-79.9	-41.3	-38.6	176	155	H
4	1262	-60.76	RMS	29.5	-48.8	-15.6	11.8	.1	-83.76	-75.3	-8.46	162	155	V
5	3253	-64.74	RMS	33.3	-46.8	-15.6	11.8	.4	-81.64	-70	-11.64	251	155	V
6	5399	-65.36	RMS	34.9	-47.3	-15.6	11.8	1.6	-79.96	-41.3	-38.66	118	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

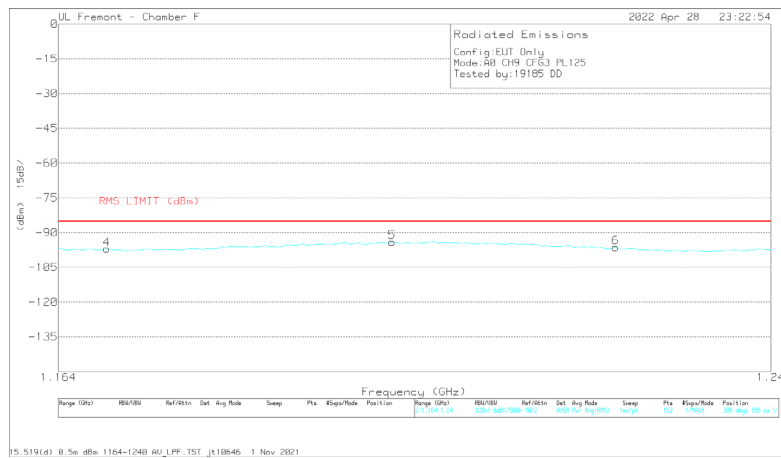
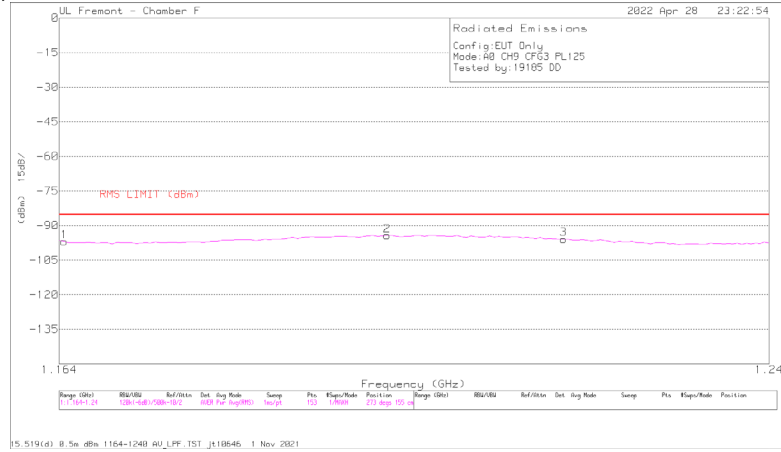
9.6.2. AVERAGE EMISSIONS, 1.164 – 1.240 GHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(d) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.169	-72.42	RMS	28.3	-49	-15.6	11.8	2	-96.72	-85.3	-11.42	207	155	H
2	1.2005	-69.31	RMS	28.2	-49.2	-15.6	11.8	2	-93.91	-85.3	-8.61	31	155	H
3	1.223	-72.48	RMS	28.4	-49	-15.6	11.8	2	-96.68	-85.3	-11.38	31	155	H
4	1.167	-72.51	RMS	28.3	-49	-15.6	11.8	2	-96.81	-85.3	-11.51	308	155	V
5	1.202	-69.47	RMS	28.2	-49.1	-15.6	11.8	2	-93.97	-85.3	-8.67	176	155	V
6	1.234	-73.16	RMS	28.5	-49	-15.6	11.8	2	-97.26	-85.3	-11.96	131	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH5 fundamental signal.

ANT. 0, CH9, CONFIG 3



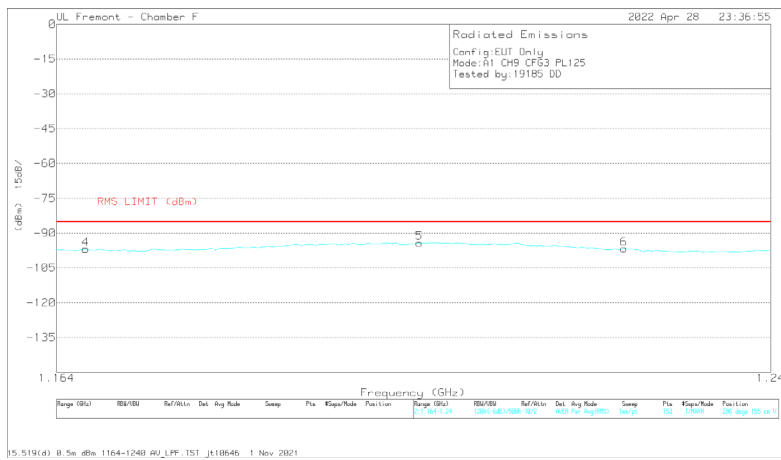
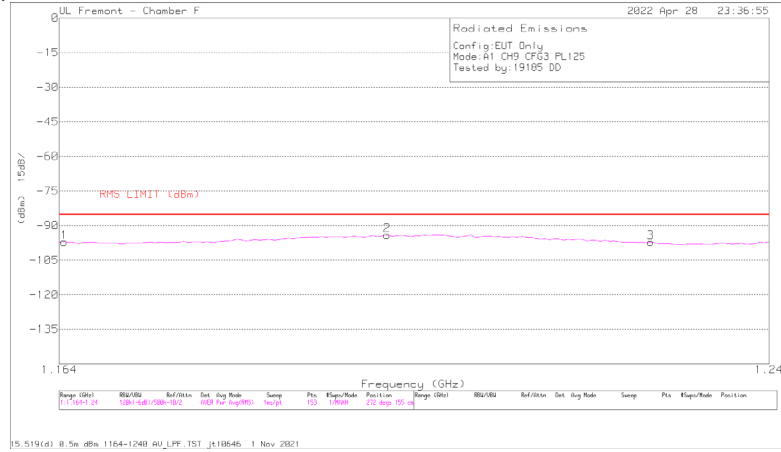
Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(d) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.1645	-72.33	RMS	28.3	-49.3	-15.6	11.8	.2	-96.93	-85.3	-11.63	229	155	H
2	1.1985	-69.81	RMS	28.1	-49	-15.6	11.8	.2	-94.31	-85.3	-9.01	74	155	H
3	1.2175	-71.65	RMS	28.4	-49	-15.6	11.8	.2	-95.85	-85.3	-10.55	339	155	H
4	1.169	-72.76	RMS	28.3	-49	-15.6	11.8	.2	-97.06	-85.3	-11.76	153	155	V
5	1.199	-69.63	RMS	28.1	-48.9	-15.6	11.8	.2	-94.03	-85.3	-8.73	242	155	V
6	1.223	-72.16	RMS	28.4	-49	-15.6	11.8	.2	-96.36	-85.3	-11.06	132	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

ANT. 1, CH9, CONFIG 3

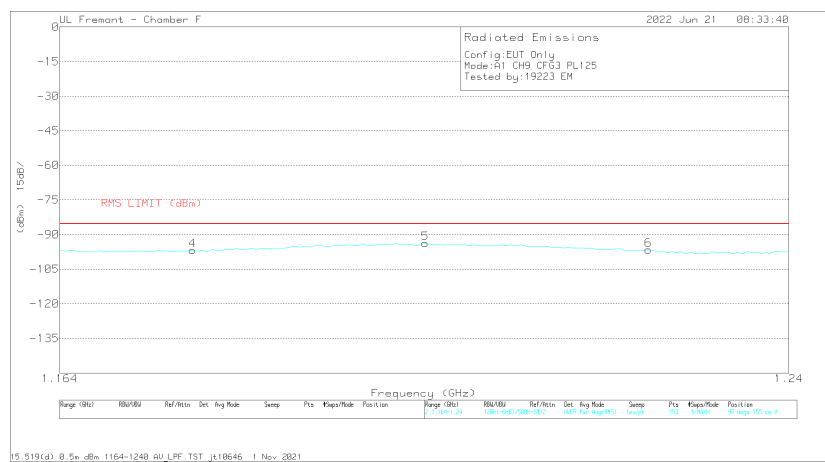
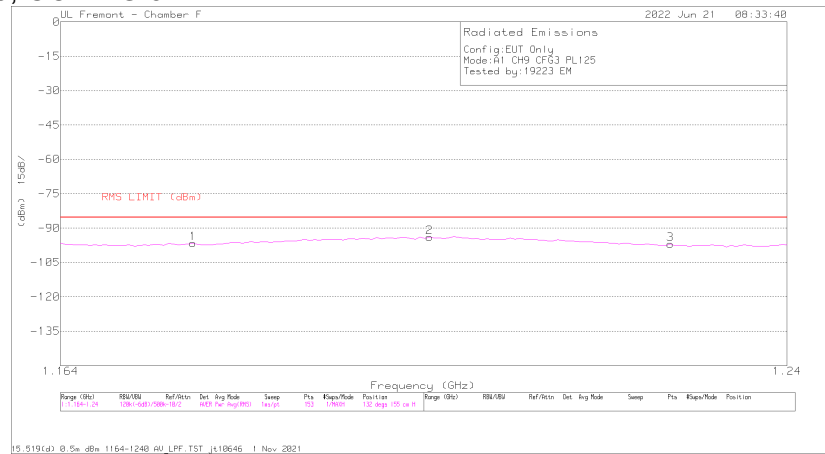


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(d) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.1645	-72.51	RMS	28.3	-49.3	-15.6	11.8	2	-97.11	-85.3	-11.81	52	155	H
2	1.1985	-69.57	RMS	28.1	-49	-15.6	11.8	2	-94.07	-85.3	-8.77	206	155	H
3	1.227	-72.98	RMS	28.4	-49	-15.6	11.8	2	-97.18	-85.3	-11.88	52	155	H
4	1.167	-72.55	RMS	28.3	-49	-15.6	11.8	2	-96.85	-85.3	-11.55	21	155	V
5	1.202	-69.69	RMS	28.2	-49.1	-15.6	11.8	2	-94.19	-85.3	-8.89	132	155	V
6	1.224	-72.5	RMS	28.4	-49	-15.6	11.8	2	-96.7	-85.3	-11.4	176	155	V

RMS - RMS detection

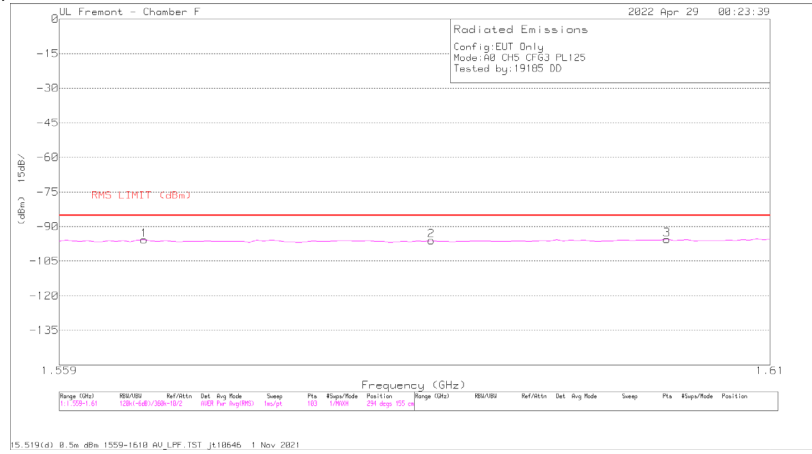
*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Amp/Cbl (dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	188196 LPF 1-6GHz	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.1775	-72.23	RMS	28.2	-49	-15.6	11.8	2	-96.63	-85.3	-11.33	286	155	H
2	1.202	-69.47	RMS	28.2	-49.1	-15.6	11.8	2	-93.97	-85.3	-8.67	198	155	H
3	1.2275	-72.62	RMS	28.4	-49.1	-15.6	11.8	2	-96.92	-85.3	-11.62	308	155	H
4	1.1775	-72.39	RMS	28.2	-49	-15.6	11.8	2	-96.79	-85.3	-11.49	229	155	V
5	1.2015	-69.09	RMS	28.2	-49.2	-15.6	11.8	2	-93.69	-85.3	-8.39	52	155	V
6	1.225	-72.39	RMS	28.4	-49	-15.6	11.8	2	-96.59	-85.3	-11.29	229	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

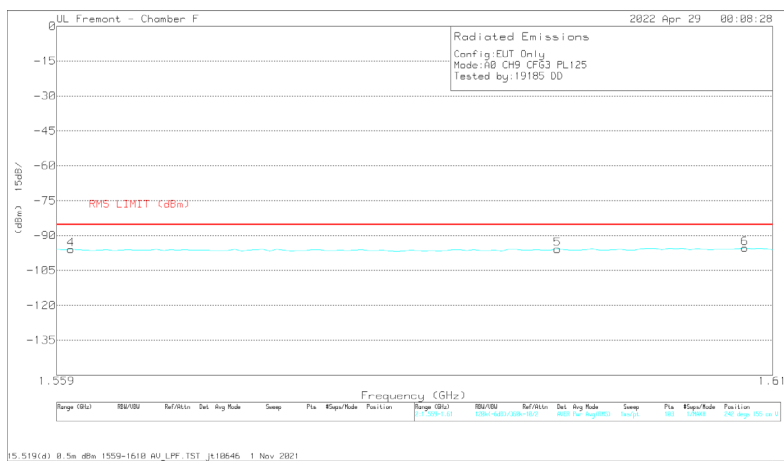
9.6.3. AVERAGE EMISSIONS, 1.559 – 1.610 GHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	18dB LPF (dB)	EIRP (dBm)	FCC15.119(d) EIRP RMS (dBm)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	1.565	-70.96	RMS	27.7	-48.9	-15.6	11.8	-2	-95.76	-85.3	-10.46	250	155	H
2	1.585	-71.12	RMS	27.7	-49	-15.6	11.8	-2	-96.02	-85.3	-10.72	52	155	H
3	1.6025	-70.83	RMS	27.8	-48.9	-15.6	11.8	-2	-95.53	-85.3	-10.23	250	155	H
4	1.5645	-71.34	RMS	27.7	-48.9	-15.6	11.8	-2	-96.14	-85.3	-10.84	154	155	V
5	1.5835	-71.1	RMS	27.7	-49	-15.6	11.8	-2	-96	-85.3	-10.7	132	155	V
6	1.594	-71.13	RMS	27.8	-48.8	-15.6	11.8	-2	-95.73	-85.3	-10.43	132	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH5 fundamental signal.

ANT. 0, CH9, CONFIG 3



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(d) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.564	-70.91	RMS	27.7	-48.9	-15.6	11.8	2	-95.71	-85.3	-10.41	97	155	H
2	1.582	-71.38	RMS	27.8	-49	-15.6	11.8	2	-96.18	-85.3	-10.88	339	155	H
3	1.6025	-70.99	RMS	27.8	-48.9	-15.6	11.8	2	-95.69	-85.3	-10.39	97	155	H
4	1.56	-71.13	RMS	27.8	-49	-15.6	11.8	2	-95.93	-85.3	-10.63	0	155	V
5	1.5945	-71.12	RMS	27.8	-48.9	-15.6	11.8	2	-95.82	-85.3	-10.52	110	155	V
6	1.608	-70.83	RMS	27.8	-48.8	-15.6	11.8	2	-95.43	-85.3	-10.13	308	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

UL Fremont - Chamber F

2022 Apr 28 23:55:06

Radiated Emissions
 Config:EUT Only
 Mode:A1 CH9 CF63 PL125
 Tested by:19185 DD

15dBZ

RMS LIMIT (dBm)

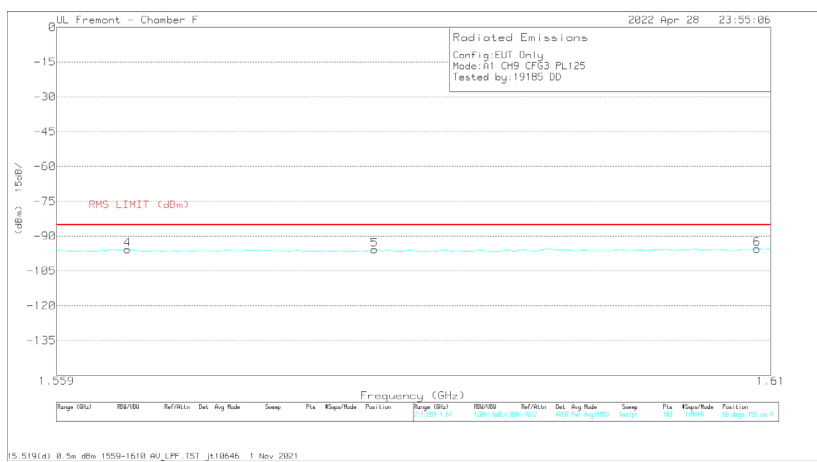
dBm

Frequency (GHz)

Range (GHz)	RFL/RBL	Ref (dBm)	Det. Avg Mode	Swamp	Pre	RF Amp/Mode	Position	Range (GHz)	RFL/RBL	Ref (dBm)	Det. Avg Mode	Swamp	Pre	RF Amp/Mode	Position
1.559-1.61	1500/1500	1500/1500	4000 Pwr Avg(900)	Low (3)	Off	150000	500 steps 250 mV								

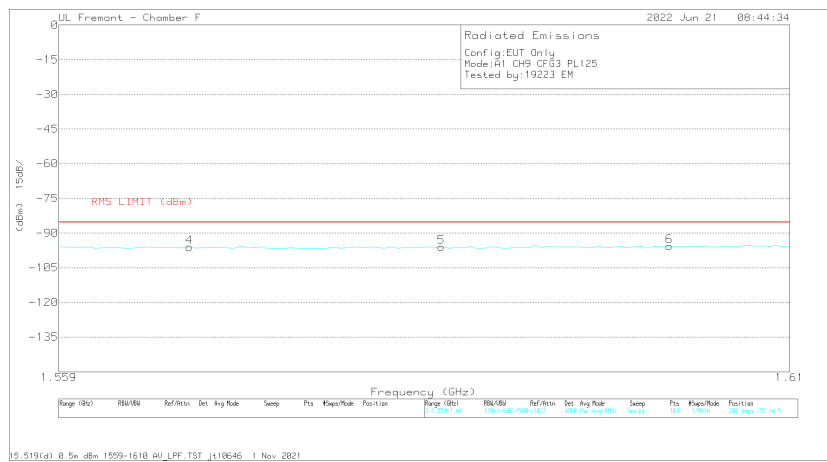
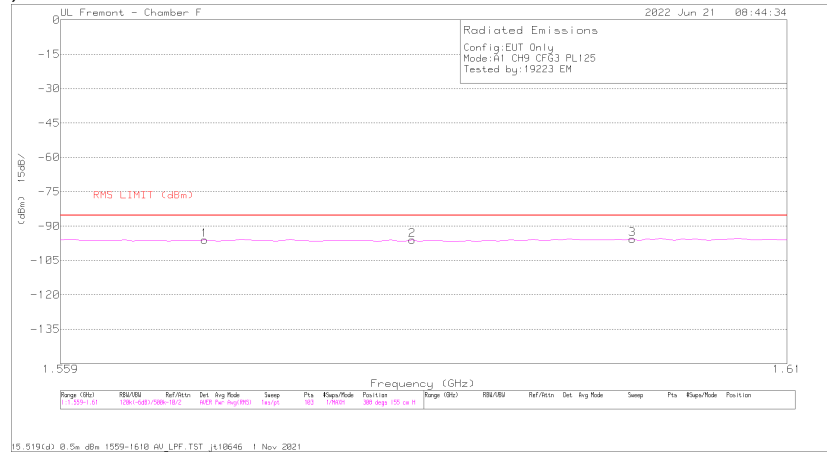
1.559 1.61

15.519(d) 0.5m dBm 1559-1618 AU_LFF_TST_Jt10546 1 Nov 2021



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cb (dB)	Dist Correction (dB)	Conversion Factor (dB)	188196 LPF (dB)	EIRP (dBm)	FCC15.519(d) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.5625	-70.9	RMS	27.7	-49	-15.6	11.8	2	-95.8	-85.3	-10.5	140	155	H
2	1.5815	-71.38	RMS	27.8	-48.9	-15.6	11.8	2	-96.08	-85.3	-10.78	338	155	H
3	1.6065	-70.71	RMS	27.8	-48.9	-15.6	11.8	2	-95.41	-85.3	-10.11	338	155	H
4	1.564	-70.94	RMS	27.7	-48.9	-15.6	11.8	2	-95.74	-85.3	-10.44	308	155	V
5	1.5815	-71.09	RMS	27.8	-48.9	-15.6	11.8	2	-95.79	-85.3	-10.49	308	155	V
6	1.609	-70.95	RMS	27.8	-48.7	-15.6	11.8	2	-95.45	-85.3	-10.15	153	155	V

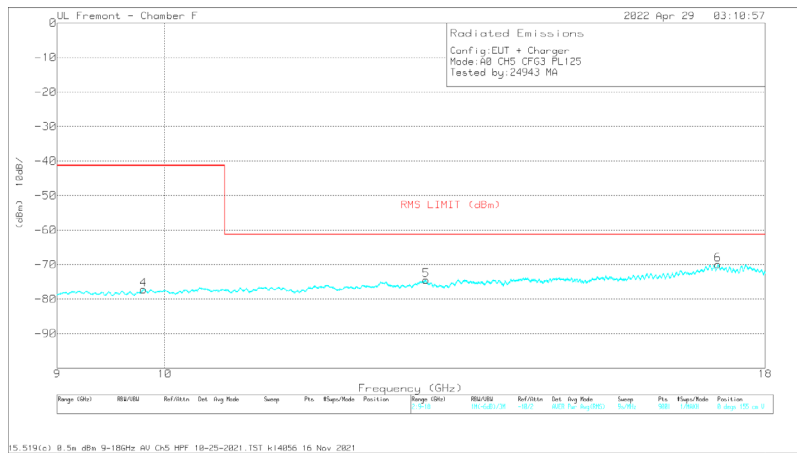
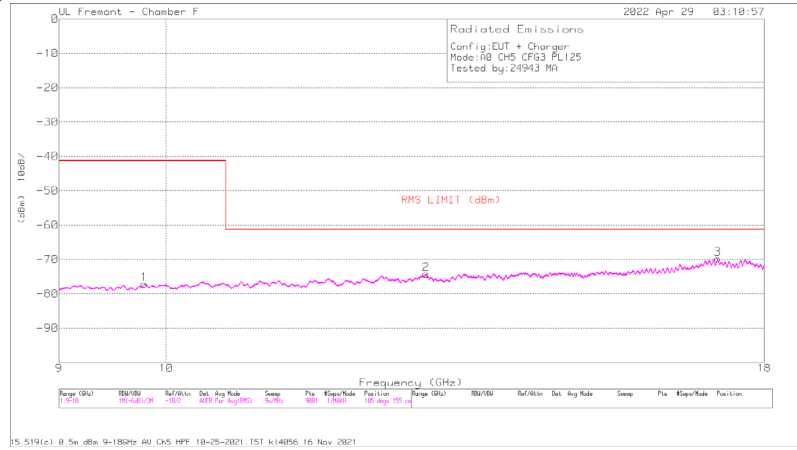
*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Amp/Cbl (dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	188196 LPF 1-6GHz	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.569	-71.36	RMS	27.8	-48.9	-15.6	11.8	2	-96.06	-85.3	-10.76	110	155	H
2	1.5835	-71.28	RMS	27.8	-49	-15.6	11.8	2	-96.08	-85.3	-10.78	264	155	H
3	1.599	-70.77	RMS	27.8	-49.1	-15.6	11.8	2	-95.67	-85.3	-10.37	264	155	H
4	1.568	-71.21	RMS	27.7	-49	-15.6	11.8	2	-96.11	-85.3	-10.81	75	155	V
5	1.5855	-71.09	RMS	27.7	-49	-15.6	11.8	2	-95.99	-85.3	-10.69	250	155	V
6	1.6015	-70.98	RMS	27.8	-48.9	-15.6	11.8	2	-95.68	-85.3	-10.38	273	155	V

RMS - RMS detection

*Note: Test was performed with a low-pass filter with cutoff frequency at 5.4 GHz to suppress CH9 fundamental signal.

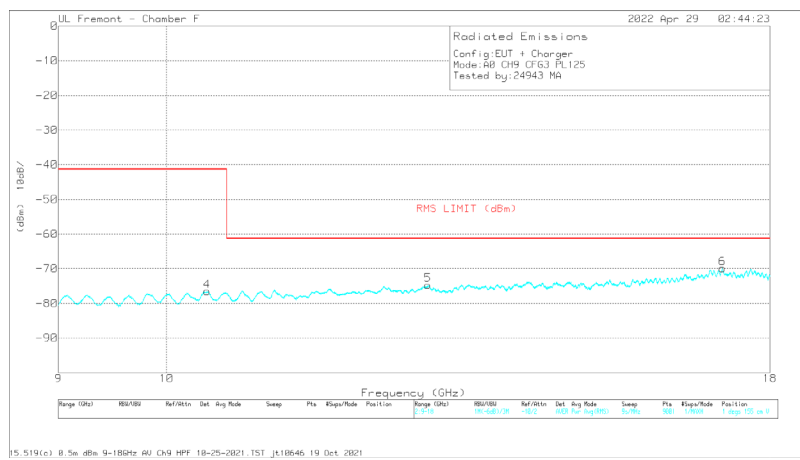
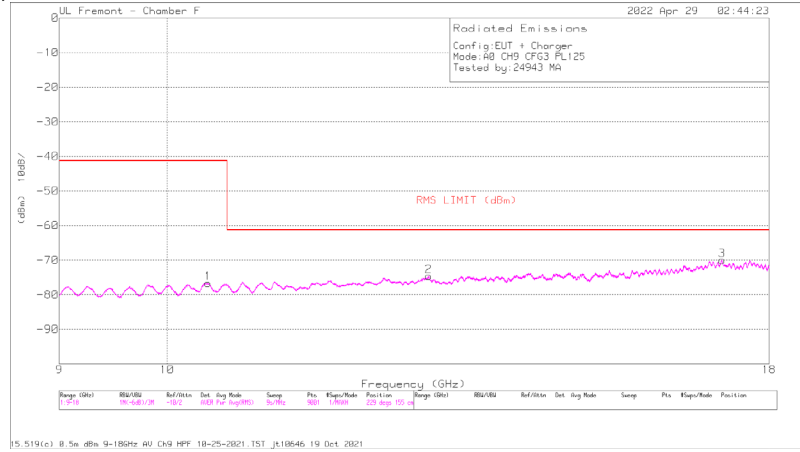
9.6.4. AVERAGE EMISSIONS, 9 – 18 GHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	CH5_HPF (dB)	EIRP (dBm)	FCC15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	9.785	-65.03	RMS	36.9	-46.3	-15.6	11.8	1.1	-77.13	-41.3	-35.83	360	155	H
2	12.911	-64.87	RMS	38.7	-44.8	-15.6	11.8	.5	-74.27	-61.3	-12.97	140	155	H
3	17.192	-64	RMS	42.2	-44.8	-15.6	11.8	.6	-69.8	-61.3	-8.5	250	155	H
4	9.794	-65	RMS	36.9	-46.3	-15.6	11.8	1	-77.2	-41.3	-36.9	21	155	V
5	12.914	-64.96	RMS	38.7	-44.8	-15.6	11.8	.4	-74.46	-61.3	-13.16	88	155	V
6	17.188	-64.24	RMS	42.2	-44.8	-15.6	11.8	.7	-69.94	-61.3	-8.64	176	155	V

RMS - RMS detection

*Note: Test was performed with a high-pass filter with pass-band frequency starting at 9 GHz to suppress CH5 fundamental signal.

ANT. 0, CH9, CONFIG 3



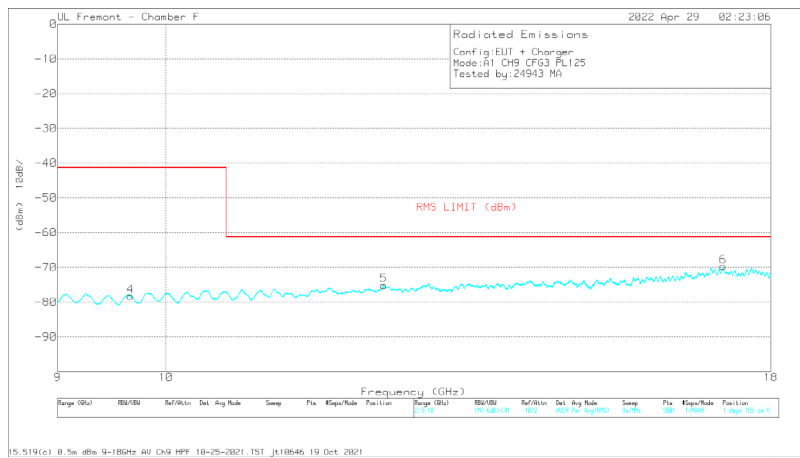
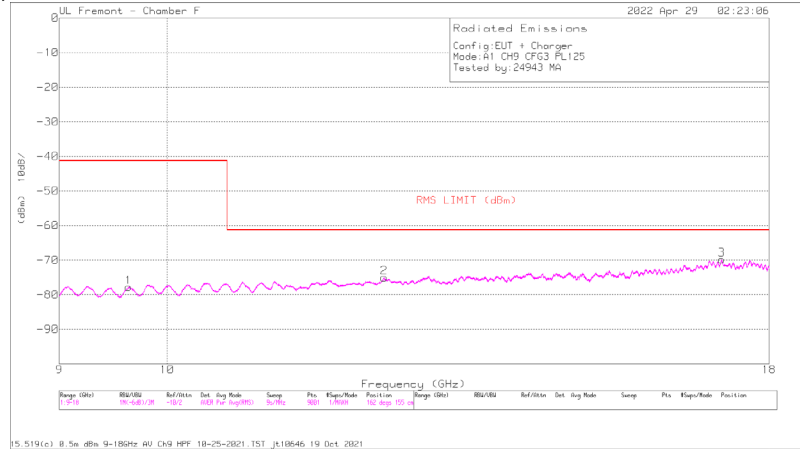
Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	CH9_HP (dB)	EIRP (dBm)	FCC15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.408	-63.81	RMS	37.3	-46.3	-15.6	11.8	0	-76.61	-41.3	-35.31	163	155	H
2	12.911	-64.9	RMS	38.7	-44.8	-15.6	11.8	.2	-74.6	-61.3	-13.3	140	155	H
3	17.192	-63.69	RMS	42.2	-44.8	-15.6	11.8	.1	-69.99	-61.3	-8.69	317	155	H
4	10.404	-63.58	RMS	37.3	-46.4	-15.6	11.8	0	-76.48	-41.3	-35.18	220	155	V
5	12.899	-64.86	RMS	38.7	-44.9	-15.6	11.8	.2	-74.66	-61.3	-13.36	198	155	V
6	17.185	-63.66	RMS	42.2	-44.8	-15.6	11.8	.2	-69.86	-61.3	-8.56	22	155	V

RMS - RMS detection

*Note: Test was performed with a high-pass filter with pass-band frequency starting at 9 GHz to suppress CH9 fundamental signal.

ANT. 1, CH9, CONFIG 3

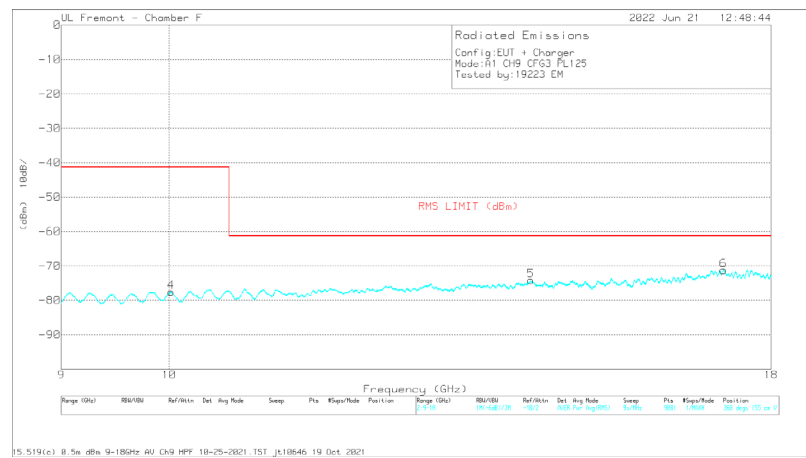
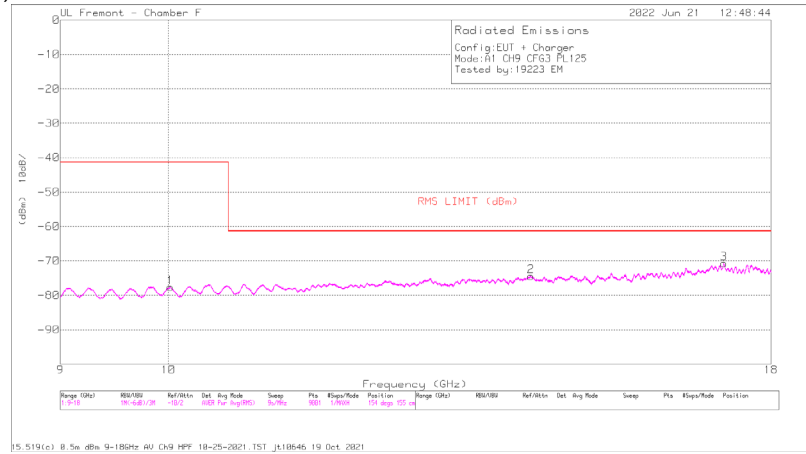


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Amp/Cbl (dB)	Dist Correction (dB)	Conversion Factor (dB)	CH5_HP (dB)	EIRP (dBm)	FCC15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	9.63	-65.1	RMS	36.8	-45.7	-15.6	11.8	0	-77.8	-41.3	-36.5	162	155	H
2	12.36	-64.81	RMS	38.6	-45.2	-15.6	11.8	2	-75.01	-61.3	-13.71	360	155	H
3	17.188	-63.49	RMS	42.2	-44.8	-15.6	11.8	1	-69.79	-61.3	-8.49	360	155	H
4	9.661	-65.56	RMS	36.7	-45.6	-15.6	11.8	0	-78.26	-41.3	-36.96	286	155	V
5	12.356	-65.15	RMS	38.6	-45	-15.6	11.8	2	-75.15	-61.3	-13.85	198	155	V
6	17.185	-63.5	RMS	42.2	-44.8	-15.6	11.8	2	-69.7	-61.3	-8.4	220	155	V

RMS - RMS detection

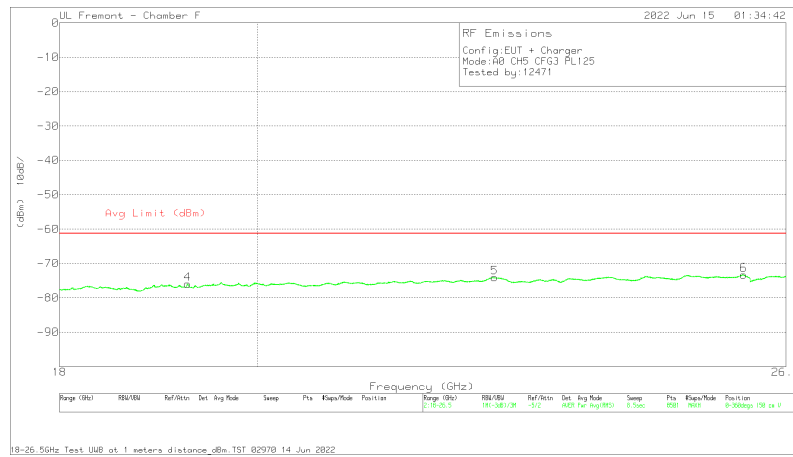
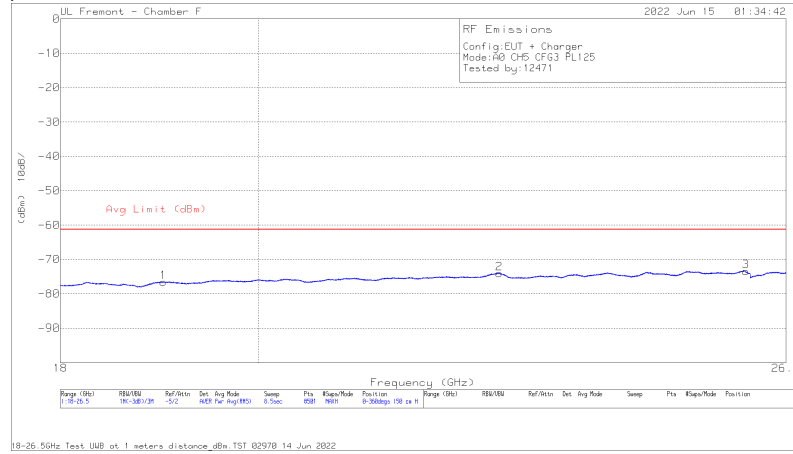
*Note: Test was performed with a high-pass filter with pass-band frequency starting at 9 GHz to suppress CH9 fundamental signal.

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Amp/Cbl (dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	Ch9 HPF (dB)	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.02	-64.21	RMS	37.3	-46.9	-15.6	11.8	0	-77.61	-41.3	-36.31	154	155	H
2	14.243	-64.31	RMS	39.7	-46.2	-15.6	11.8	2	-74.41	-61.3	-13.11	154	155	H
3	17.192	-64.41	RMS	42.2	-44.8	-15.6	11.8	1	-70.71	-61.3	-9.41	132	155	H
4	10.019	-64.28	RMS	37.3	-46.8	-15.6	11.8	0	-77.58	-41.3	-36.28	316	155	V
5	14.235	-64.19	RMS	39.7	-46.1	-15.6	11.8	2	-74.19	-61.3	-12.89	360	155	V
6	17.183	-64.95	RMS	42.2	-44.9	-15.6	11.8	2	-71.25	-61.3	-9.95	250	155	V

RMS - RMS detection

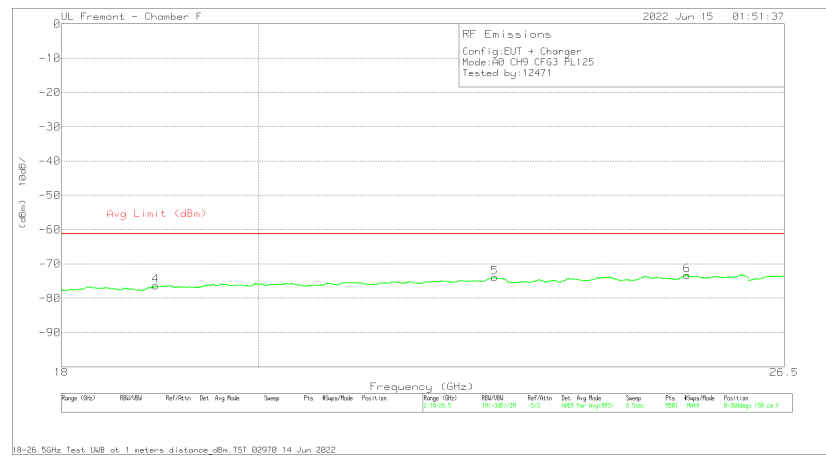
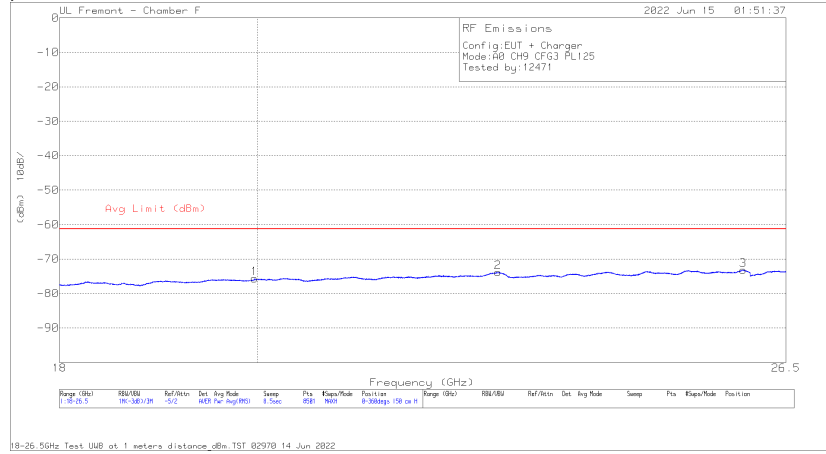
*Note: Test was performed with a high-pass filter with pass-band frequency starting at 9 GHz to suppress CH9 fundamental signal.

9.6.5. AVERAGE EMISSIONS, 18 – 26.5 GHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172362 1m AF (dB/m)	171580 Amp (dB)	Cables (dB)	Distance CF (dB)	Conv. Fact. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.014	-66.09	RMS	32.7	-63.3	17.8	-9.5	11.8	-76.59	-61.3	-15.29	0-360	150	H
2	22.744	-67.53	RMS	34.7	-63	19.5	-9.5	11.8	-74.03	-61.3	-12.73	0-360	150	H
3	25.939	-70.58	RMS	35.7	-61.9	21	-9.5	11.8	-73.48	-61.3	-12.18	0-360	150	H
4	19.27	-66.09	RMS	32.9	-63	17.9	-9.5	11.8	-75.99	-61.3	-14.69	0-360	150	V
5	22.691	-67.58	RMS	34.8	-63.1	19.5	-9.5	11.8	-74.08	-61.3	-12.78	0-360	150	V
6	25.91	-70.35	RMS	35.8	-61.9	20.9	-9.5	11.8	-73.25	-61.3	-11.95	0-360	150	V

RMS - RMS detection

ANT. 0, CH9, CONFIG 3

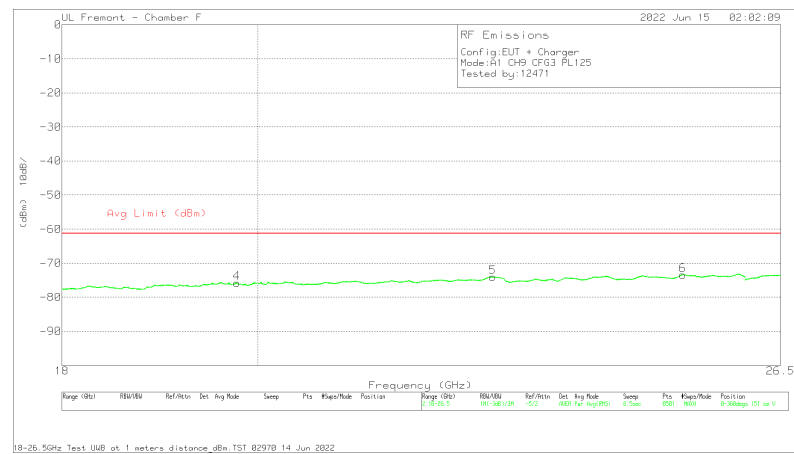
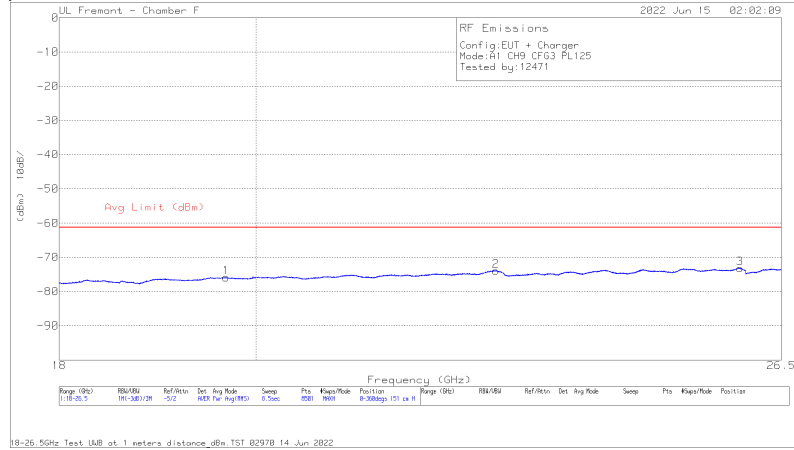


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172362 1m AF (dB/m)	171580 Amp (dB)	Cables (dB)	Distance CF (dB)	Conv. Fact. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.968	-67.53	RMS	33.5	-62.1	18.2	-9.5	11.8	-75.63	-61.3	-14.33	0-360	150	H
2	22.732	-67.26	RMS	34.7	-63.1	19.5	-9.5	11.8	-73.86	-61.3	-12.56	0-360	150	H
3	25.901	-70.29	RMS	35.8	-61.9	20.9	-9.5	11.8	-73.19	-61.3	-11.89	0-360	150	H
4	18.931	-65.78	RMS	32.4	-63.1	17.8	-9.5	11.8	-76.38	-61.3	-15.08	0-360	150	V
5	22.696	-67.42	RMS	34.8	-63.1	19.5	-9.5	11.8	-73.92	-61.3	-12.62	0-360	150	V
6	25.156	-69.52	RMS	35.8	-62.5	20.6	-9.5	11.8	-73.32	-61.3	-12.02	0-360	150	V

RMS - RMS detection

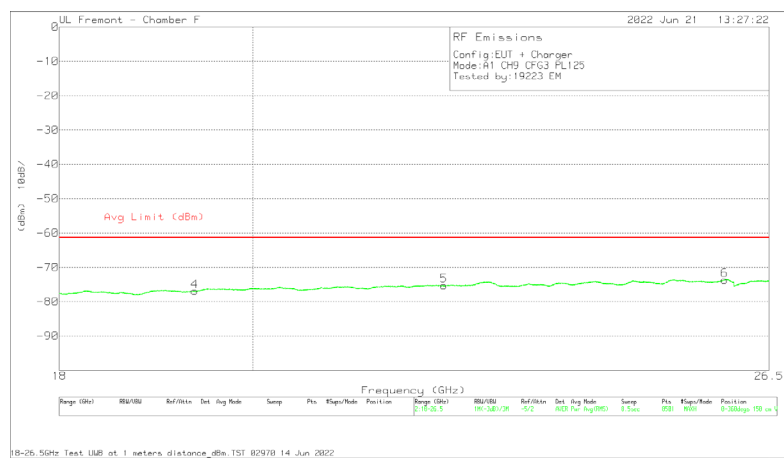
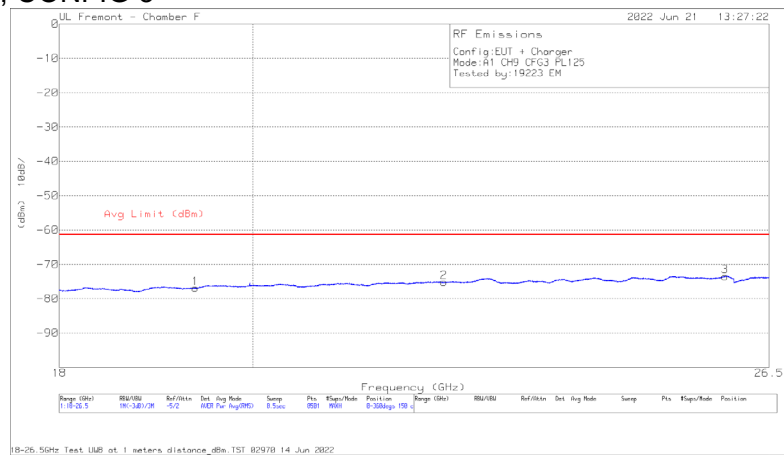
ANT. 1, CH9, CONFIG 3



Trace Markers

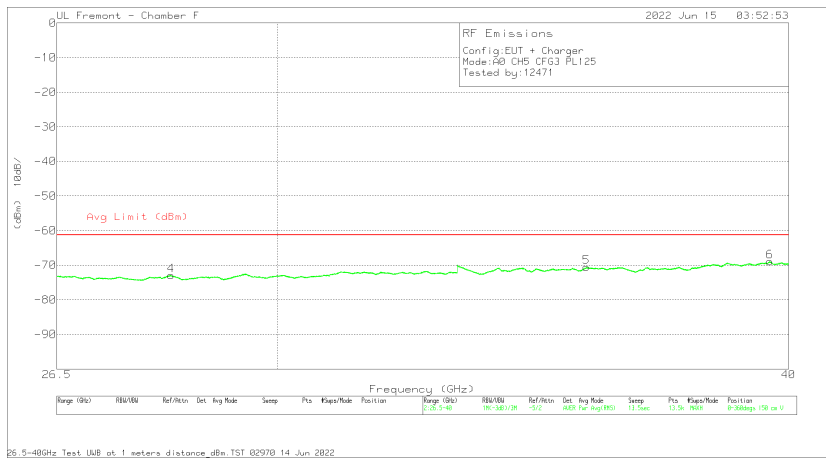
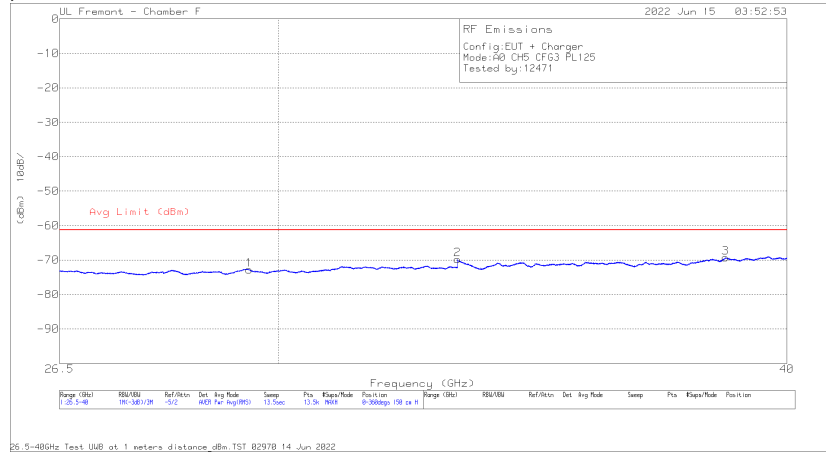
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172362 1m AF (dB/m)	171580 Amp (dB)	Cables (dB)	Distance CF (dB)	Conv. Fact. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.683	-66.88	RMS	33.3	-62.7	18.1	-9.5	11.8	-75.88	-61.3	-14.58	0-360	150	H
2	22.743	-67.38	RMS	34.7	-63	19.5	-9.5	11.8	-73.88	-61.3	-12.58	0-360	150	H
3	25.92	-70.21	RMS	35.7	-61.9	20.9	-9.5	11.8	-73.21	-61.3	-11.91	0-360	150	H
4	19.78	-66.76	RMS	33.2	-62.6	18.1	-9.5	11.8	-75.76	-61.3	-14.46	0-360	150	V
5	22.697	-67.55	RMS	34.8	-63.1	19.5	-9.5	11.8	-74.05	-61.3	-12.75	0-360	150	V
6	25.142	-69.6	RMS	35.8	-62.5	20.6	-9.5	11.8	-73.4	-61.3	-12.1	0-360	150	V

RMS - RMS detection

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172362 1m AF (dB/m)	171580 Amp (dB)	Cables (dB)	Distance CF (dB)	Conv. Fact. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.384	-66.91	RMS	32.7	-63	18	-9.5	11.8	-76.91	-61.3	-15.61	0-360	150	H
2	22.198	-67.58	RMS	34.1	-63.3	19.3	-9.5	11.8	-75.18	-61.3	-13.88	0-360	150	H
3	25.871	-70.59	RMS	35.8	-61.9	20.9	-9.5	11.8	-73.49	-61.3	-12.19	0-360	150	H
4	19.379	-66.99	RMS	32.8	-63	18	-9.5	11.8	-76.89	-61.3	-15.59	0-360	150	V
5	22.197	-67.66	RMS	34.1	-63.3	19.3	-9.5	11.8	-75.26	-61.3	-13.96	0-360	150	V
6	25.864	-70.74	RMS	35.8	-61.9	20.9	-9.5	11.8	-73.64	-61.3	-12.34	0-360	150	V

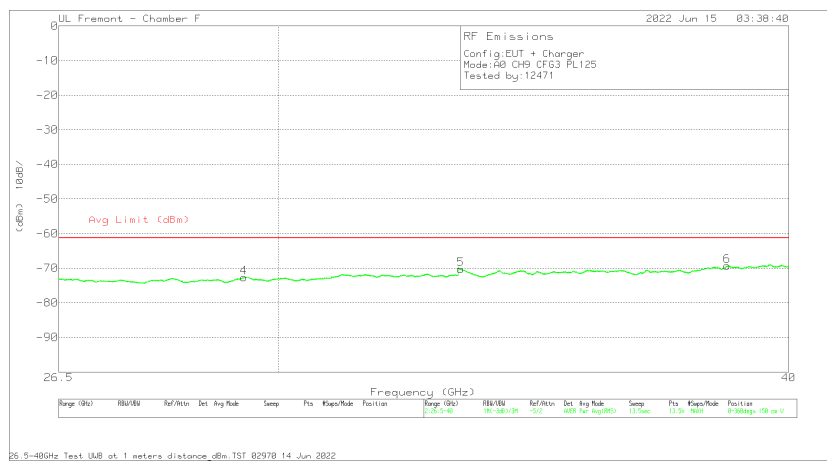
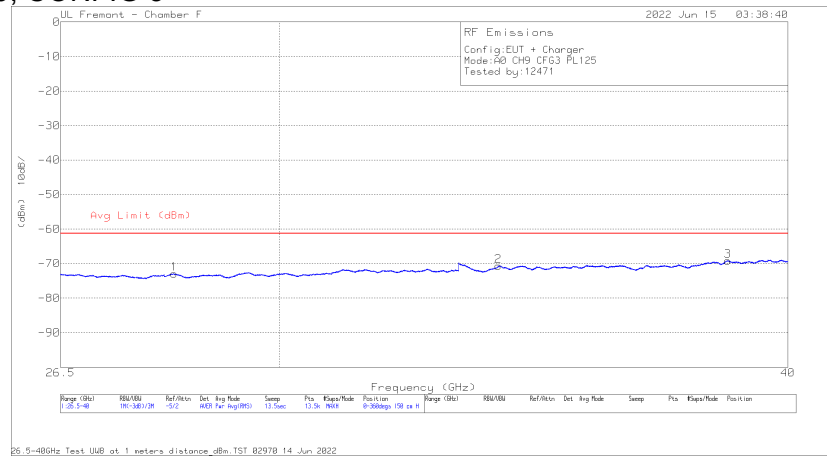
RMS - RMS detection

9.6.6. AVERAGE EMISSIONS, 26.5 – 40 GHz**Parent****ANT. 0, CH5, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172365 1m AF (dB/m)	220537 Amp (dB)	Distance CF (dB)	Conv. Fact. (dB)	Cables (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	29.507	-71.88	RMS	36.8	-62.4	-9.5	11.8	22.4	-72.78	-61.3	-11.48	0-360	150	H
2	33.2	-72.13	RMS	37.6	-61.5	-9.5	11.8	23.9	-69.83	-61.3	-8.53	0-360	150	H
3	36.633	-73.74	RMS	39.1	-63.1	-9.5	11.8	26.1	-69.34	-61.3	-8.04	0-360	150	H
4	28.26	-71.18	RMS	36.6	-62.6	-9.5	11.8	21.9	-72.98	-61.3	-11.68	0-360	150	V
5	35.702	-73.7	RMS	38.4	-62.6	-9.5	11.8	25	-70.6	-61.3	-9.3	0-360	150	V
6	39.579	-74.77	RMS	39.2	-62.2	-9.5	11.8	26.5	-68.97	-61.3	-7.67	0-360	150	V

RMS - RMS detection

ANT. 0, CH9, CONFIG 3

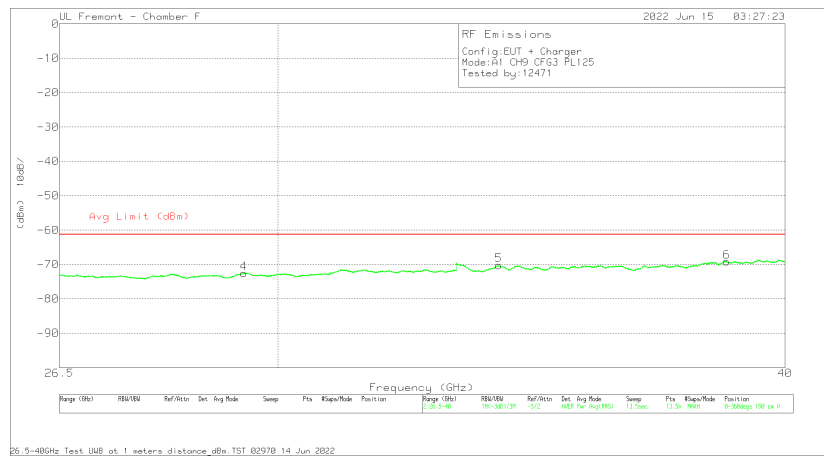
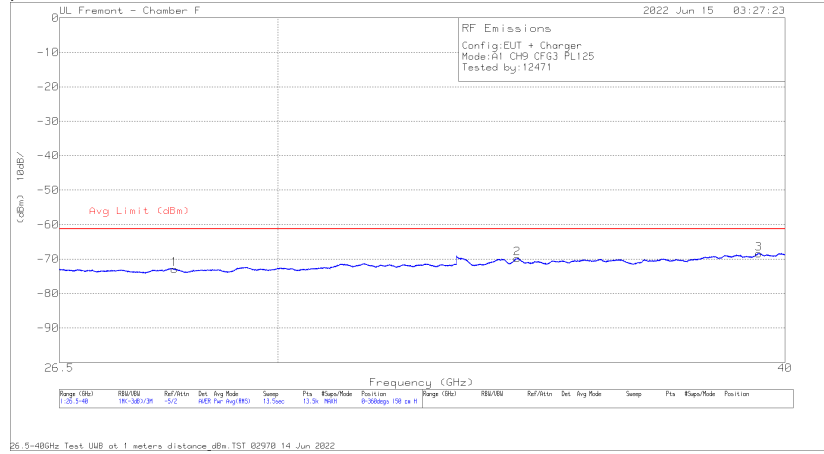


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172365 1m AF (dB/m)	220537 Amp (dB)	Distance CF (dB)	Conv. Fact. (dB)	Cables (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.261	-71.13	RMS	36.6	-62.6	-9.5	11.8	21.9	-72.93	-61.3	-11.63	0-360	150	H
2	33.949	-73.7	RMS	37.7	-61.2	-9.5	11.8	24.2	-70.7	-61.3	-9.4	0-360	150	H
3	38.659	-73.82	RMS	39.2	-62.9	-9.5	11.8	26.1	-69.12	-61.3	-7.82	0-360	150	H
4	29.415	-71.82	RMS	36.8	-62.4	-9.5	11.8	22.4	-72.72	-61.3	-11.42	0-360	150	V
5	33.245	-72.68	RMS	37.5	-61.3	-9.5	11.8	23.9	-70.28	-61.3	-8.98	0-360	150	V
6	38.633	-73.64	RMS	39.1	-63.1	-9.5	11.8	26.1	-69.24	-61.3	-7.94	0-360	150	V

RMS - RMS detection

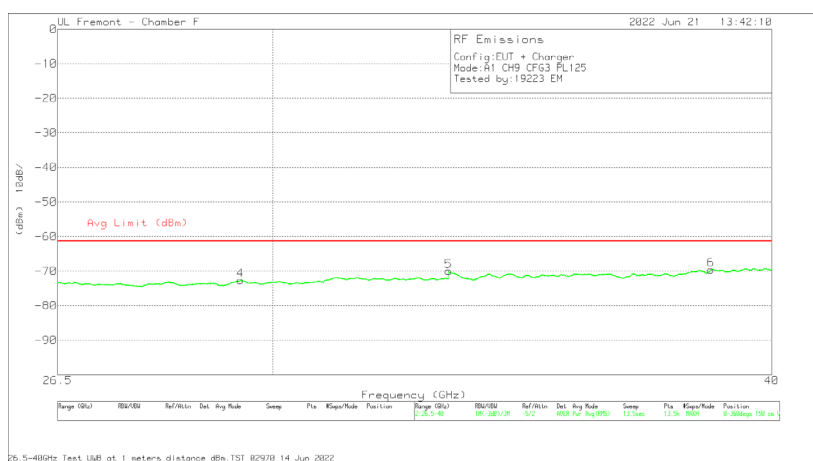
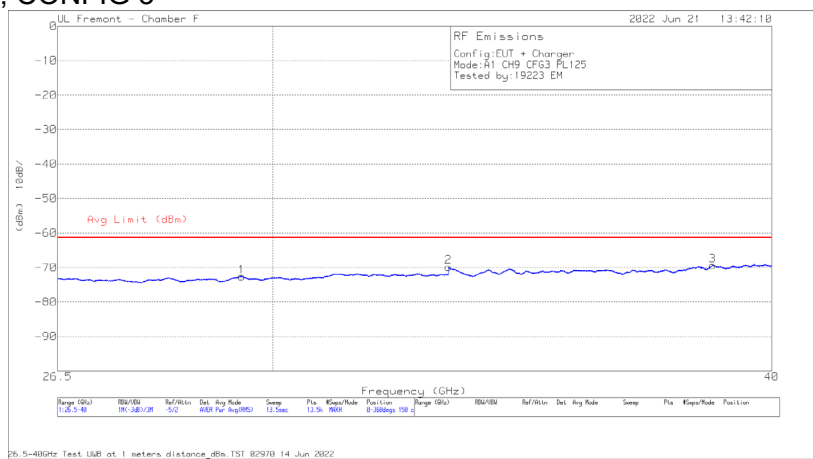
ANT. 1, CH9, CONFIG 3



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172365 1m AF (dB/m)	220537 Amp (dB)	Distance CF (dB)	Conv. Fact. (dB)	Cables (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.285	-71.07	RMS	36.6	-62.6	-9.5	11.8	21.9	-72.87	-61.3	-11.57	0-360	150	H
2	34.359	-72.84	RMS	38	-61.6	-9.5	11.8	24.3	-69.84	-61.3	-8.54	0-360	150	H
3	39.409	-74.67	RMS	39.2	-61.6	-9.5	11.8	26.4	-68.37	-61.3	-7.07	0-360	150	H
4	29.428	-71.61	RMS	36.8	-62.4	-9.5	11.8	22.4	-72.51	-61.3	-11.21	0-360	150	V
5	34.006	-73.53	RMS	37.8	-61	-9.5	11.8	24.2	-70.23	-61.3	-8.93	0-360	150	V
6	38.698	-74.09	RMS	39.2	-62.7	-9.5	11.8	26.1	-69.19	-61.3	-7.89	0-360	150	V

RMS - RMS detection

A2889 Variant**ANT. 1, CH9, CONFIG 3****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	172365 1m AF (dB/m)	220537 Amp (dB)	Distance CF (dB)	Conv. Fact. (dB)	Cables (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	29.469	-71.71	RMS	36.8	-62.4	-9.5	11.8	22.4	-72.61	-61.3	-11.31	0-360	150	H
2	33.2	-72.1	RMS	37.6	-61.5	-9.5	11.8	23.9	-69.8	-61.3	-8.5	0-360	150	H
3	38.662	-74.07	RMS	39.2	-62.9	-9.5	11.8	26.1	-69.37	-61.3	-8.07	0-360	150	H
4	29.448	-71.74	RMS	36.8	-62.4	-9.5	11.8	22.4	-72.64	-61.3	-11.34	0-360	150	V
5	33.201	-72.26	RMS	37.6	-61.5	-9.5	11.8	23.9	-69.96	-61.3	-8.66	0-360	150	V
6	38.623	-73.96	RMS	39.1	-63.1	-9.5	11.8	26.1	-69.56	-61.3	-8.26	0-360	150	V

RMS - RMS detection

9.7. AC POWER-LINE CONDUCTED EMISSIONS**LIMITS**

FCC §15.207 (a) & RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.**TEST PROCEDURE**

ANSI C63.10 Section 6.2

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

Results for both the parent and variant A2889 models are shown below.

Parent Model

Employee IDs: 12471

Location: Immunity Test Lab

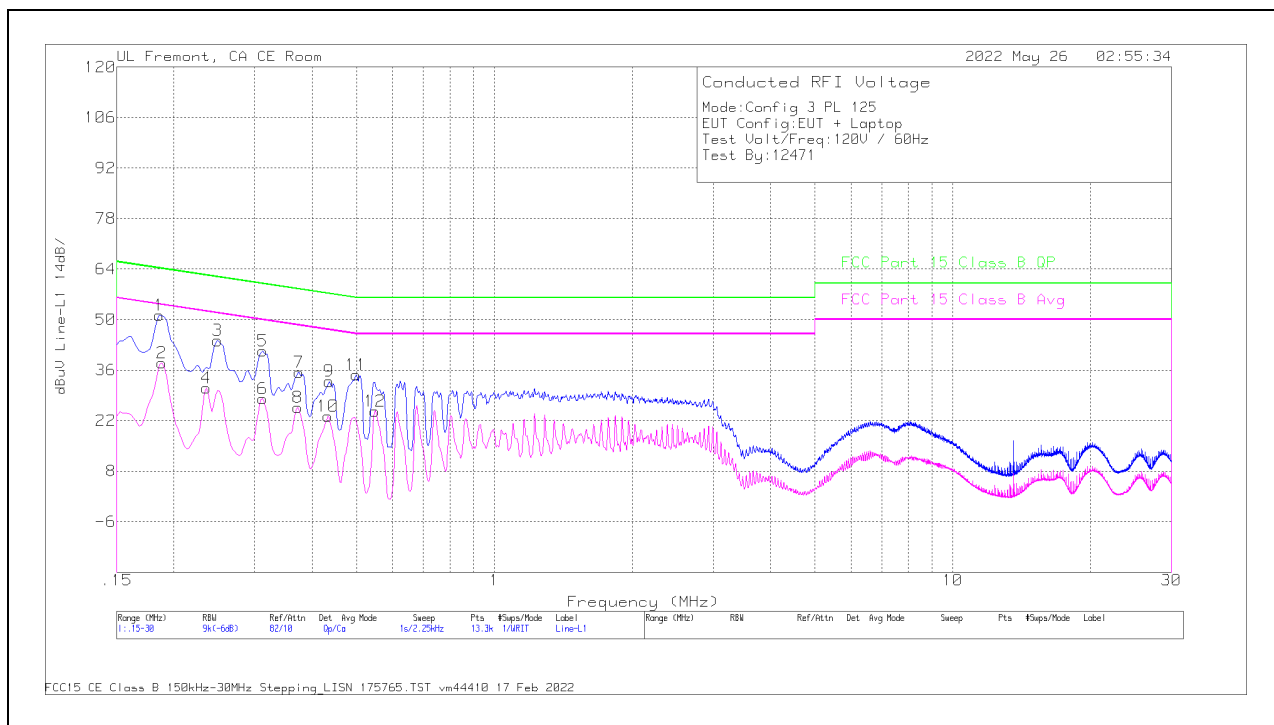
Test Date: 05/26/2022

Variant Model A2889

Employee ID: 24943

Location: Immunity Test Lab

Test Date: 06/21/2022

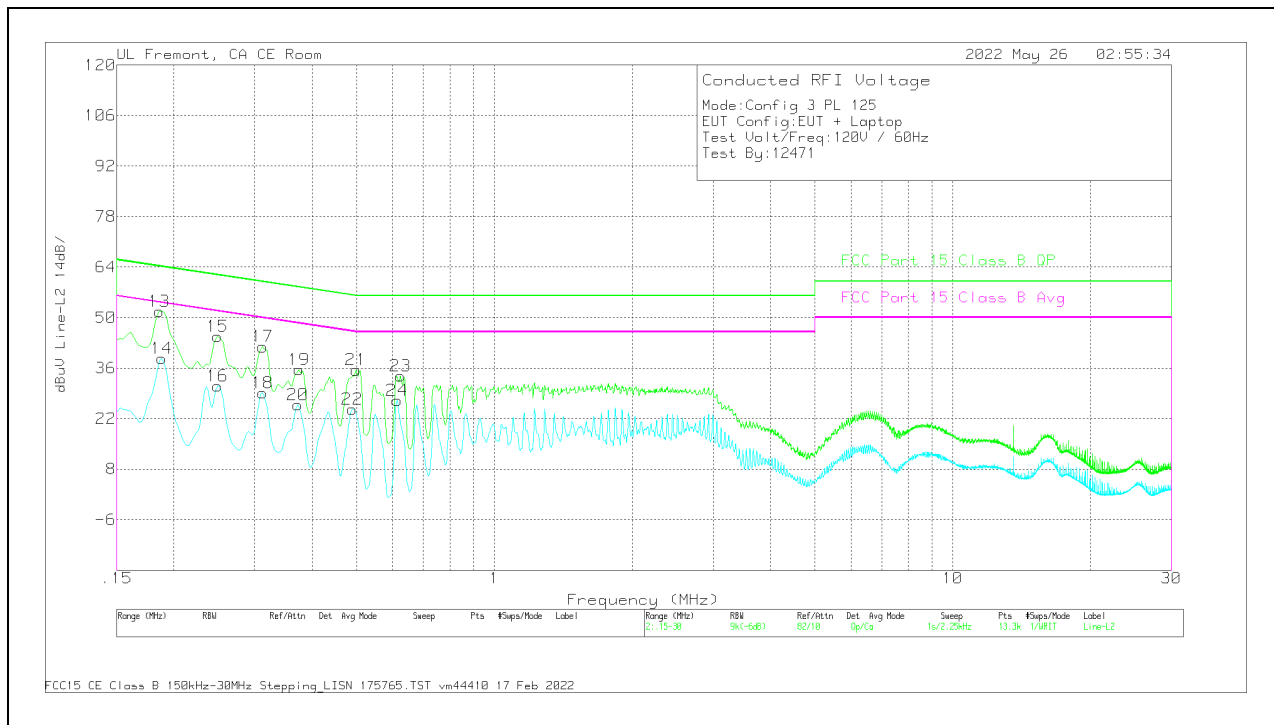
9.7.1. AC Power Line With Laptop**Parent****LINE 1 RESULTS****Range 1: Line-L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L1 (dB)	C1&C3 cable (dB)	TekBox Limiter TBFL1 Model 207 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
2	.1883	28.56	Ca	.1	0	9.4	38.06	-	-	54.11	-16.05
4	.2355	21.68	Ca	0	0	9.3	30.98	-	-	52.25	-21.27
6	.312	18.75	Ca	0	0	9.3	28.05	-	-	49.92	-21.87
8	.3728	16.34	Ca	0	0	9.3	25.64	-	-	48.44	-22.8
10	.4335	13.91	Ca	0	0	9.3	23.21	-	-	47.19	-23.98
12	.5483	15.38	Ca	0	0	9.3	24.68	-	-	46	-21.32
1	.186	41.74	Qp	.1	0	9.4	51.24	64.21	-12.97	-	-
3	.249	34.88	Qp	0	0	9.3	44.18	61.79	-17.61	-	-
5	.312	32.06	Qp	0	0	9.3	41.36	59.92	-18.56	-	-
7	.375	26.07	Qp	0	0	9.3	35.37	58.39	-23.02	-	-
9	.4358	23.58	Qp	0	0	9.3	32.88	57.14	-24.26	-	-
11	.4988	25.45	Qp	0	0	9.3	34.75	56.02	-21.27	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

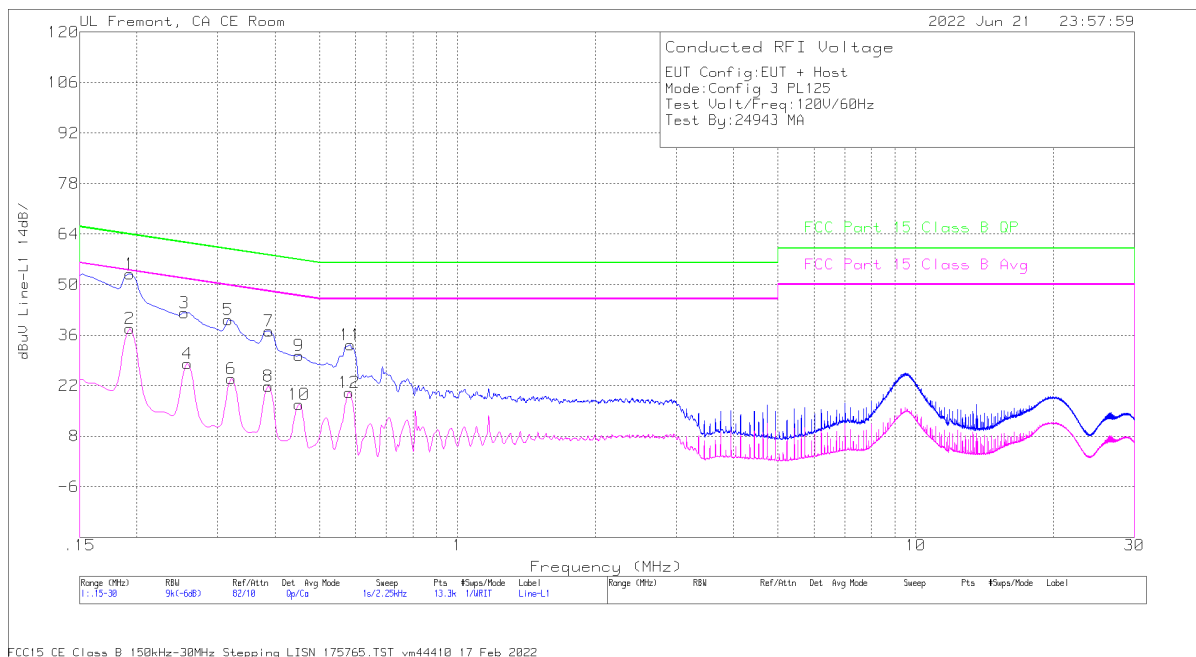


Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L2 (dB)	C2&C3 cable (dB)	TekBox Limiter TBFL1 Model 207 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
14	.1883	29.16	Ca	.1	0	9.4	38.66	-	-	54.11	-15.45
16	.249	21.77	Ca	0	0	9.3	31.07	-	-	51.79	-20.72
18	.312	19.84	Ca	0	0	9.3	29.14	-	-	49.92	-20.78
20	.3728	16.49	Ca	0	0	9.3	25.79	-	-	48.44	-22.65
22	.4898	15.29	Ca	0	0	9.3	24.59	-	-	46.17	-21.58
24	.6135	17.59	Ca	0	.1	9.3	26.99	-	-	46	-19.01
13	.186	42.31	Qp	.1	0	9.4	51.81	64.21	-12.4	-	-
15	.249	35.44	Qp	0	0	9.3	44.74	61.79	-17.05	-	-
17	.312	32.62	Qp	0	0	9.3	41.92	59.92	-18	-	-
19	.375	26.34	Qp	0	0	9.3	35.64	58.39	-22.75	-	-
21	.4988	26.19	Qp	0	0	9.3	35.49	56.02	-20.53	-	-
23	.6248	24.41	Qp	0	.1	9.3	33.81	56	-22.19	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

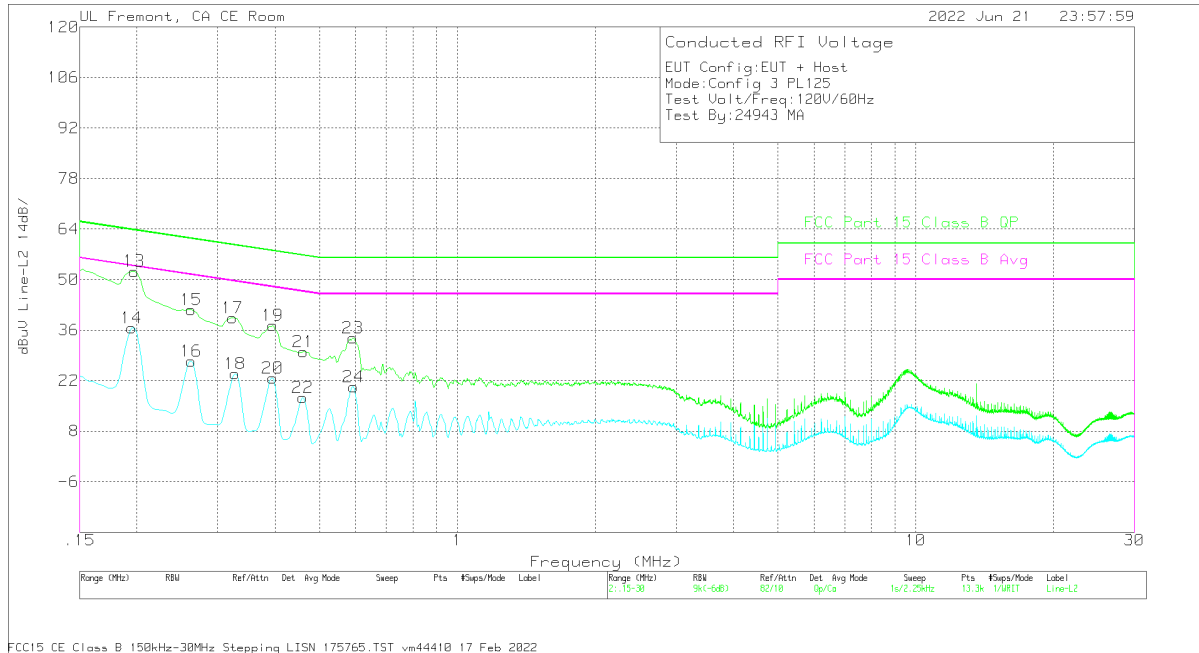
A2889 Variant**LINE 1 RESULTS****Range 1: Line-L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L1 (dB)	C1&C3 cable (dB)	207996 Limiter 9k-600M_6-2-22 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
2	.1928	27.76	Ca	.1	0	9.9	37.76	-	-	53.92	-16.16
4	.258	18.64	Ca	0	0	9.5	28.14	-	-	51.5	-23.36
6	.321	14.48	Ca	0	0	9.5	23.98	-	-	49.68	-25.7
8	.3863	12.41	Ca	0	0	9.5	21.91	-	-	48.14	-26.23
10	.4515	7.29	Ca	0	0	9.5	16.79	-	-	46.85	-30.06
12	.5798	10.55	Ca	0	.1	9.5	20.15	-	-	46	-25.85
1	.1928	42.88	Qp	.1	0	9.9	52.88	63.92	-11.04	-	-
3	.2535	32.73	Qp	0	0	9.5	42.23	61.64	-19.41	-	-
5	.3165	30.72	Qp	0	0	9.5	40.22	59.8	-19.58	-	-
7	.3885	27.67	Qp	0	0	9.5	37.17	58.1	-20.93	-	-
9	.4515	20.8	Qp	0	0	9.5	30.3	56.85	-26.55	-	-
11	.5843	23.76	Qp	0	.1	9.5	33.36	56	-22.64	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

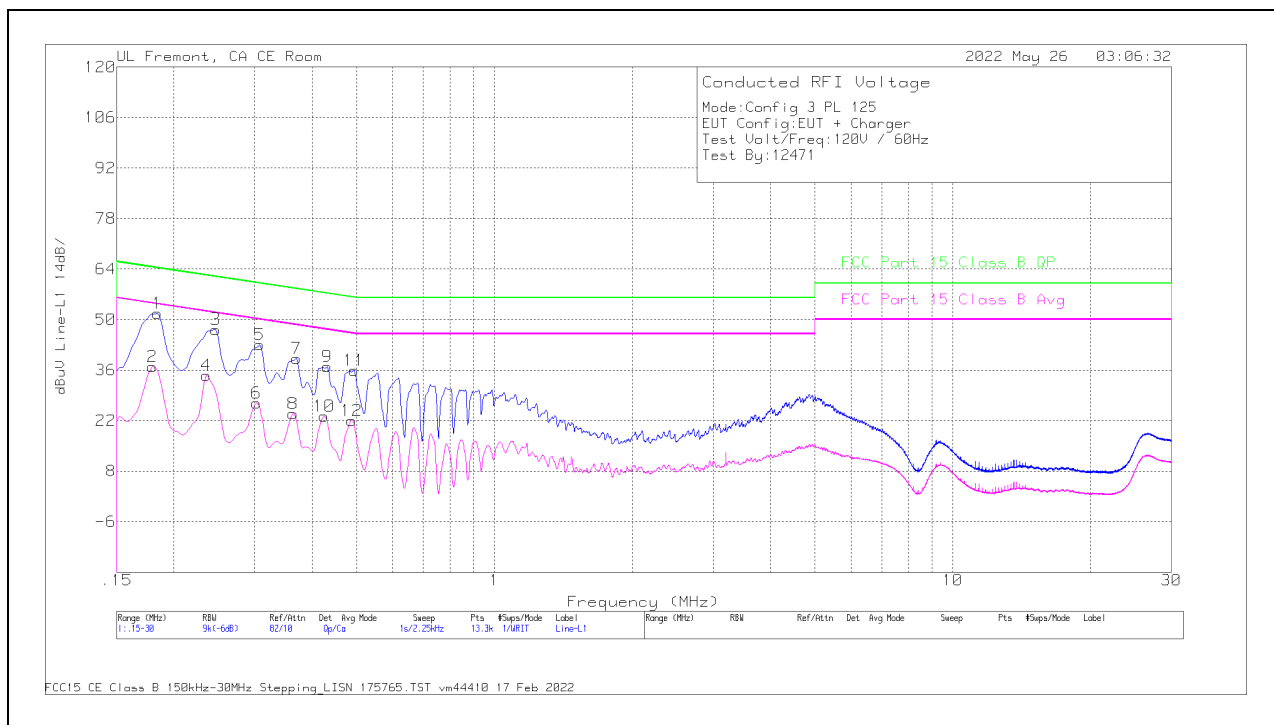


Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L2 (dB)	C2&C3 cable (dB)	207996 Limiter 9k-600M_6-2-22 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
14	.195	26.69	Ca	0	0	9.9	36.59	-	-	53.82	-17.23
16	.2625	17.87	Ca	0	0	9.5	27.37	-	-	51.35	-23.98
18	.3278	14.36	Ca	0	0	9.5	23.86	-	-	49.51	-25.65
20	.3953	13.19	Ca	0	0	9.5	22.69	-	-	47.95	-25.26
22	.4605	7.77	Ca	0	0	9.5	17.27	-	-	46.68	-29.41
24	.5933	10.7	Ca	0	.1	9.5	20.3	-	-	46	-25.7
13	.1973	42.54	Qp	0	0	9.8	52.34	63.73	-11.39	-	-
15	.2625	32.15	Qp	0	0	9.5	41.65	61.35	-19.7	-	-
17	.3233	29.97	Qp	0	0	9.5	39.47	59.62	-20.15	-	-
19	.3953	27.8	Qp	0	0	9.5	37.3	57.95	-20.65	-	-
21	.4616	20.56	Qp	0	0	9.5	30.06	56.66	-26.6	-	-
23	.591	24.28	Qp	0	.1	9.5	33.88	56	-22.12	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

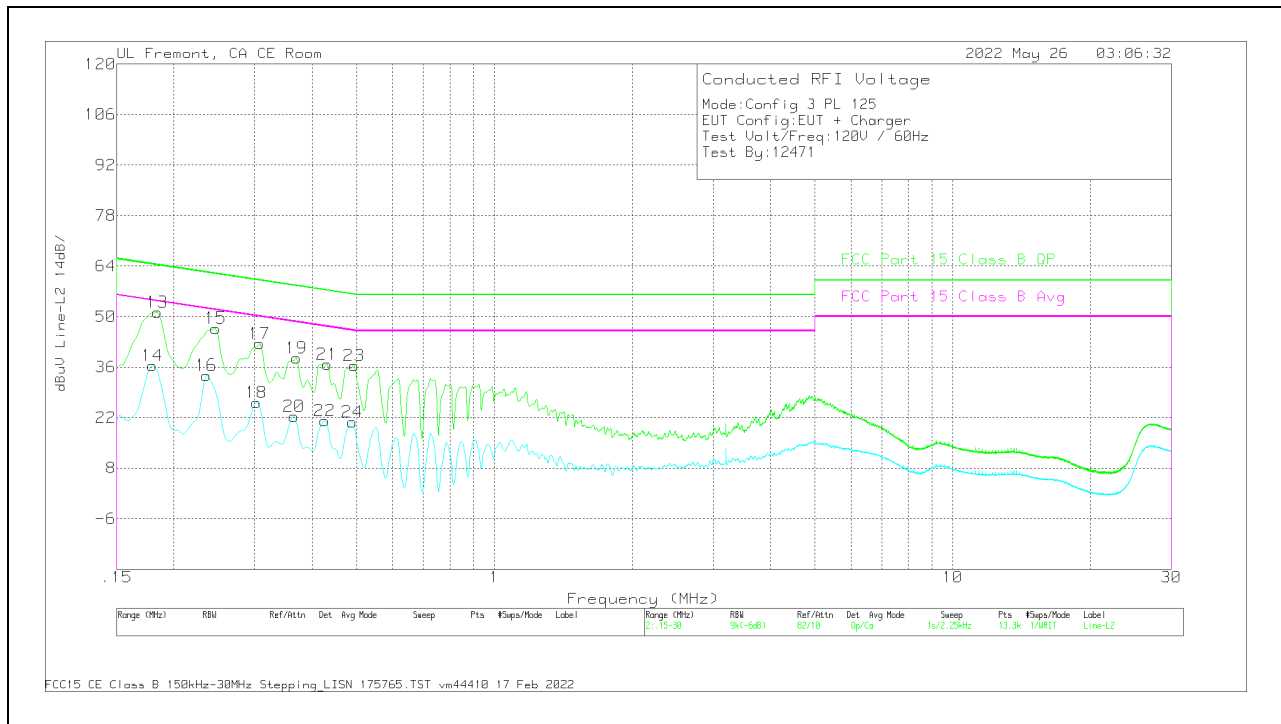
9.7.2. AC Power Line With AC/DC Adapter**Parent****LINE 1 RESULTS****Range 1: Line-L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L1 (dB)	C1&C3 cable (dB)	TekBox Limiter TBFL1 Model 207 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
2	.1793	27.44	Ca	.1	0	9.4	36.94	-	-	54.52	-17.58
4	.2355	25.19	Ca	0	0	9.3	34.49	-	-	52.25	-17.76
6	.303	17.57	Ca	0	0	9.3	26.87	-	-	50.16	-23.29
8	.3638	14.67	Ca	0	0	9.3	23.97	-	-	48.64	-24.67
10	.4245	13.93	Ca	0	0	9.3	23.23	-	-	47.36	-24.13
12	.4886	12.73	Ca	0	0	9.3	22.03	-	-	46.19	-24.16
1	.1838	42.19	Qp	.1	0	9.4	51.69	64.31	-12.62	-	-
3	.2468	38	Qp	0	0	9.3	47.3	61.87	-14.57	-	-
5	.3075	33.71	Qp	0	0	9.3	43.01	60.04	-17.03	-	-
7	.3705	29.92	Qp	0	0	9.3	39.22	58.49	-19.27	-	-
9	.4313	27.66	Qp	0	0	9.3	36.96	57.23	-20.27	-	-
11	.4943	26.69	Qp	0	0	9.3	35.99	56.1	-20.11	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

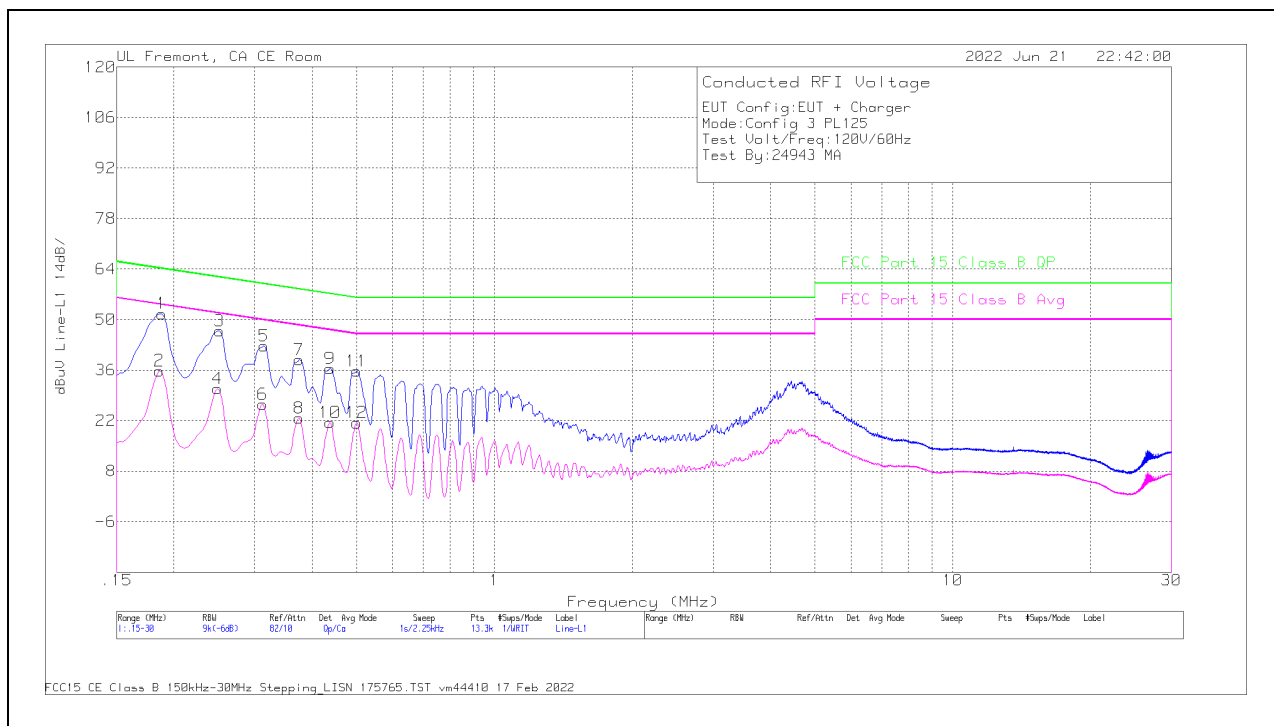


Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L2 (dB)	C2&C3 cable (dB)	TekBox Limiter TBFL1 Model 207 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
14	.1793	26.95	Ca	.1	0	9.4	36.45	-	-	54.52	-18.07
16	.2355	24.44	Ca	0	0	9.3	33.74	-	-	52.25	-18.51
18	.303	16.84	Ca	0	0	9.3	26.14	-	-	50.16	-24.02
20	.366	13.02	Ca	0	0	9.3	22.32	-	-	48.59	-26.27
22	.4268	11.88	Ca	0	0	9.3	21.18	-	-	47.32	-26.14
24	.4898	11.56	Ca	0	0	9.3	20.86	-	-	46.17	-25.31
13	.1838	41.74	Qp	.1	0	9.4	51.24	64.31	-13.07	-	-
15	.2468	37.48	Qp	0	0	9.3	46.78	61.87	-15.09	-	-
17	.3075	33.19	Qp	0	0	9.3	42.49	60.04	-17.55	-	-
19	.3705	29.19	Qp	0	0	9.3	38.49	58.49	-20	-	-
21	.4313	27.53	Qp	0	0	9.3	36.83	57.23	-20.4	-	-
23	.4943	27.2	Qp	0	0	9.3	36.5	56.1	-19.6	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

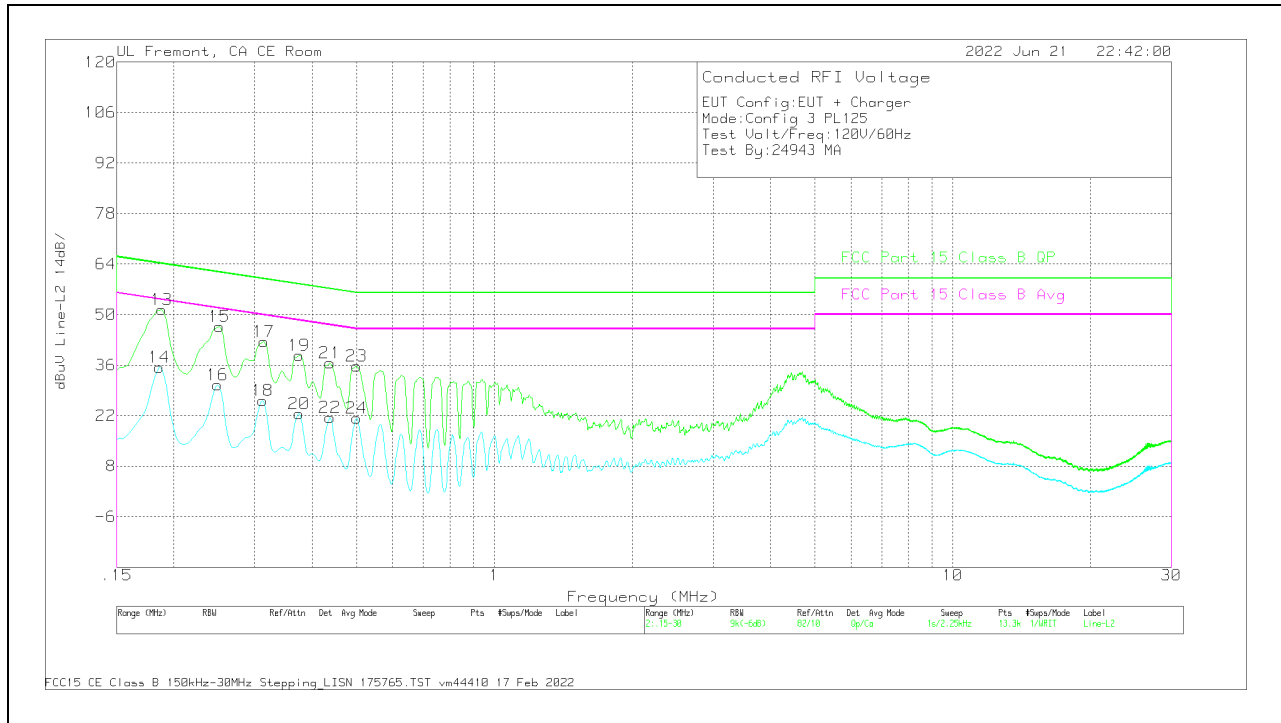
A2889 Variant**LINE 1 RESULTS****Range 1: Line-L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L1 (dB)	C1&C3 cable (dB)	207996 Limiter 9k-600M 6-2-22 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
2	.186	25.63	Ca	.1	0	10.1	35.83	-	-	54.21	-18.38
4	.249	21.43	Ca	0	0	9.5	30.93	-	-	51.79	-20.86
6	.312	17.08	Ca	0	0	9.5	26.58	-	-	49.92	-23.34
8	.375	13.21	Ca	0	0	9.5	22.71	-	-	48.39	-25.68
10	.438	12.06	Ca	0	0	9.5	21.56	-	-	47.1	-25.54
12	.501	11.91	Ca	0	0	9.5	21.41	-	-	46	-24.59
1	.1883	41.45	Qp	.1	0	10.1	51.65	64.11	-12.46	-	-
3	.2513	37.43	Qp	0	0	9.5	46.93	61.72	-14.79	-	-
5	.3143	33.2	Qp	0	0	9.5	42.7	59.86	-17.16	-	-
7	.375	29.32	Qp	0	0	9.5	38.82	58.39	-19.57	-	-
9	.438	26.99	Qp	0	0	9.5	36.49	57.1	-20.61	-	-
11	.501	26.28	Qp	0	0	9.5	35.78	56	-20.22	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS



Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L2 (dB)	C2&C3 cable (dB)	207996 Limiter 9k-600M 6-2-22 (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av(CISPR) Margin (dB)
14	.186	25.22	Ca	.1	0	10.1	35.42	-	-	54.21	-18.79
16	.249	21.09	Ca	0	0	9.5	30.59	-	-	51.79	-21.2
18	.312	16.76	Ca	0	0	9.5	26.26	-	-	49.92	-23.66
20	.375	13.08	Ca	0	0	9.5	22.58	-	-	48.39	-25.81
22	.438	12	Ca	0	0	9.5	21.5	-	-	47.1	-25.6
24	.501	11.86	Ca	0	0	9.5	21.36	-	-	46	-24.64
13	.1883	41.16	Qp	.1	0	10.1	51.36	64.11	-12.75	-	-
15	.2513	37.17	Qp	0	0	9.5	46.67	61.72	-15.05	-	-
17	.3143	32.97	Qp	0	0	9.5	42.47	59.86	-17.39	-	-
19	.375	29.24	Qp	0	0	9.5	38.74	58.39	-19.65	-	-
21	.438	27.04	Qp	0	0	9.5	36.54	57.1	-20.56	-	-
23	.501	26.3	Qp	0	0	9.5	35.8	56	-20.2	-	-

Qp - Quasi-Peak detector

Ca - CISPR average detection

10. SETUP PHOTOS

Please refer to 14040863-EP21V1 for setup photos.

END OF REPORT