

**GSM 850**

Communication System: UID 0, 1@GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.00018

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM 850\_GMSK Voice\_Ch. 190\_Port A/y (transversal) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.30 dB

BWC Factor = 10.80 dB

Location: 12.1, -7.2, 3.7 mm

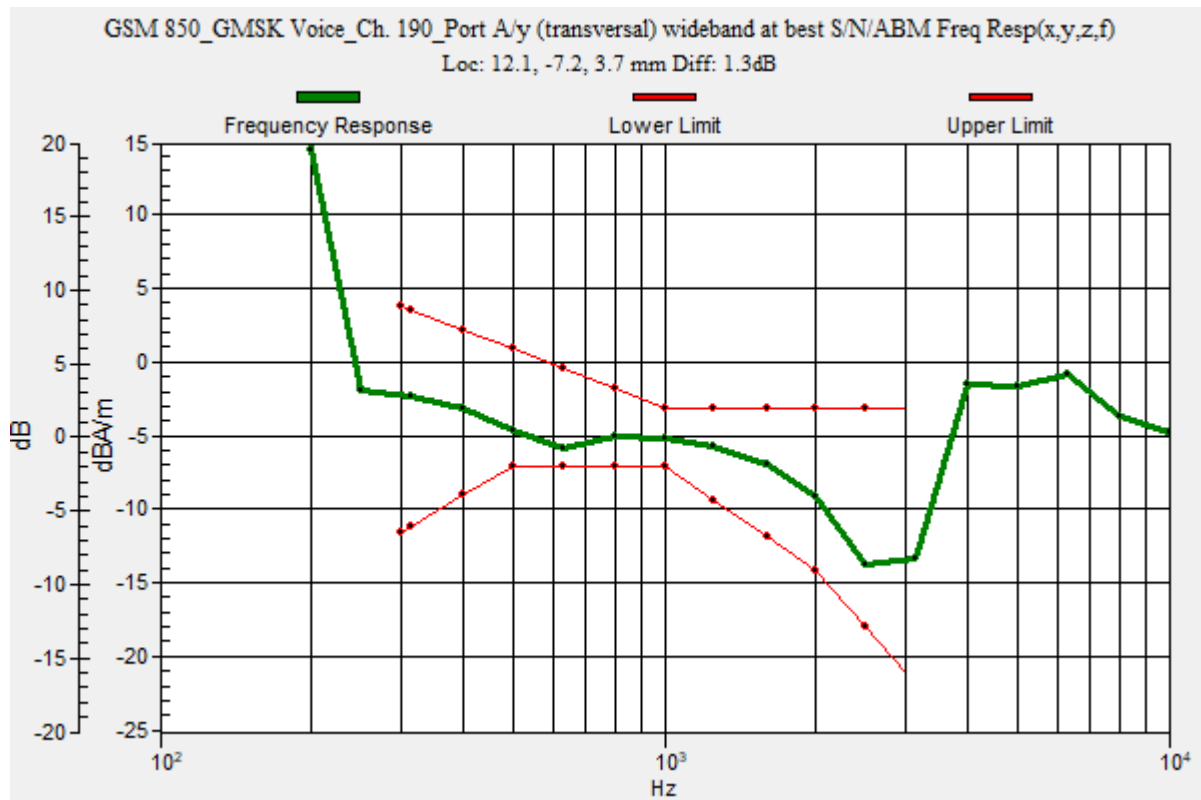

## GSM 850

Communication System: UID 0, 1@GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM 850\_GMSK Voice\_Ch. 190\_Port A/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 42.92 dB

ABM1 comp = -1.90 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -7.1, 3.7 mm

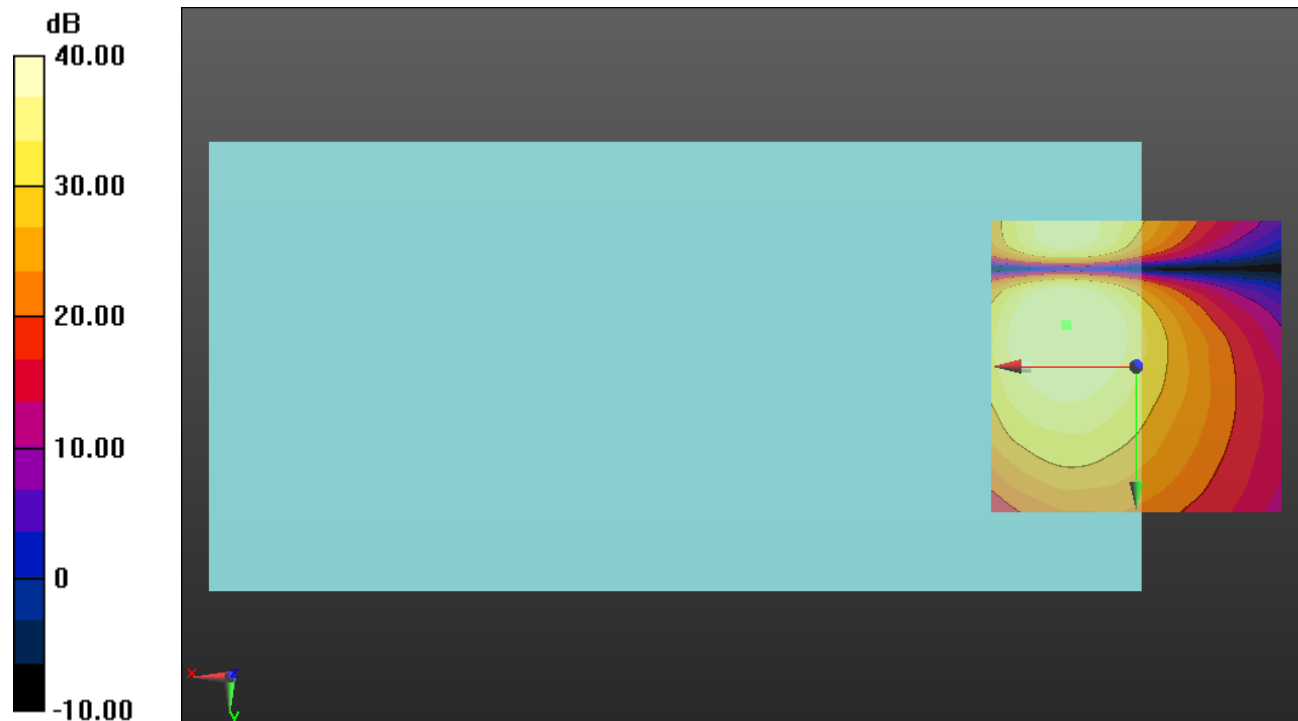

0 dB = 1.000 = 0.00 dB

**GSM 1900**

Communication System: UID 0, 1@GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 1880 MHz; Duty Cycle: 1:8.00018

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM 1900\_GMSK Voice\_Ch. 661\_Port D/y (transversal) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.26 dB

BWC Factor = 10.80 dB

Location: 11.9, -7.5, 3.7 mm

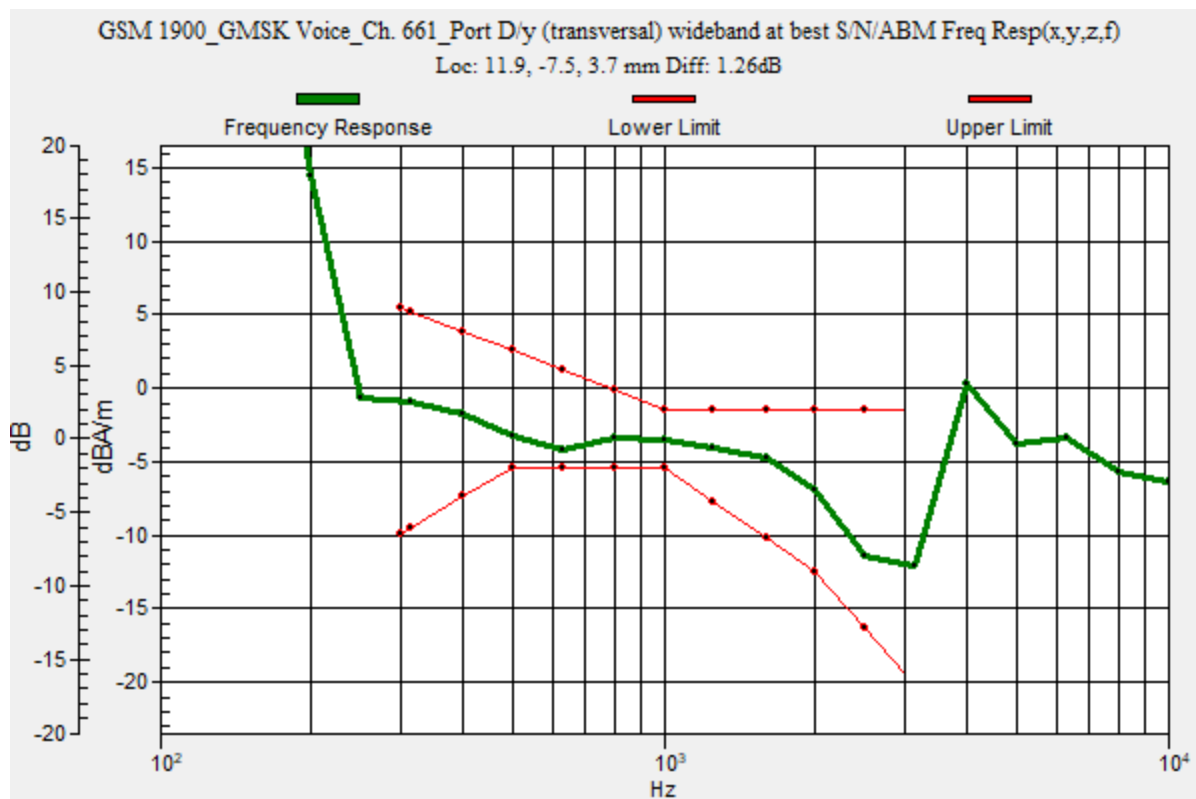

## GSM 1900

Communication System: UID 0, 1@GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 1880 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM 1900\_GMSK Voice\_Ch. 661\_Port D/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 44.96 dB

ABM1 comp = -1.94 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -7.5, 3.7 mm

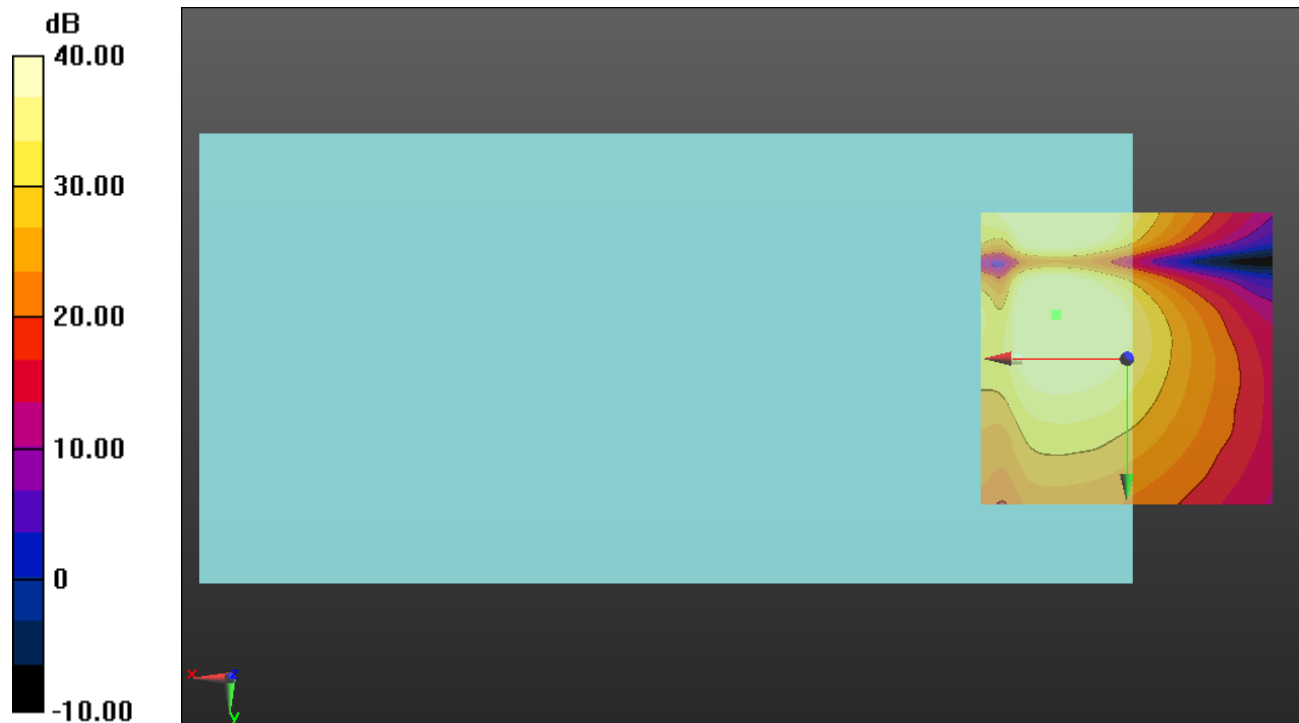

0 dB = 1.000 = 0.00 dB

## W-CDMA Band II

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band II\_Rel. 99\_Ch 9262\_AMR-WB: 6.6 kbps\_Port A/y (transversal) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.03 dB

BWC Factor = 10.80 dB

Location: 12.1, -8.2, 3.7 mm

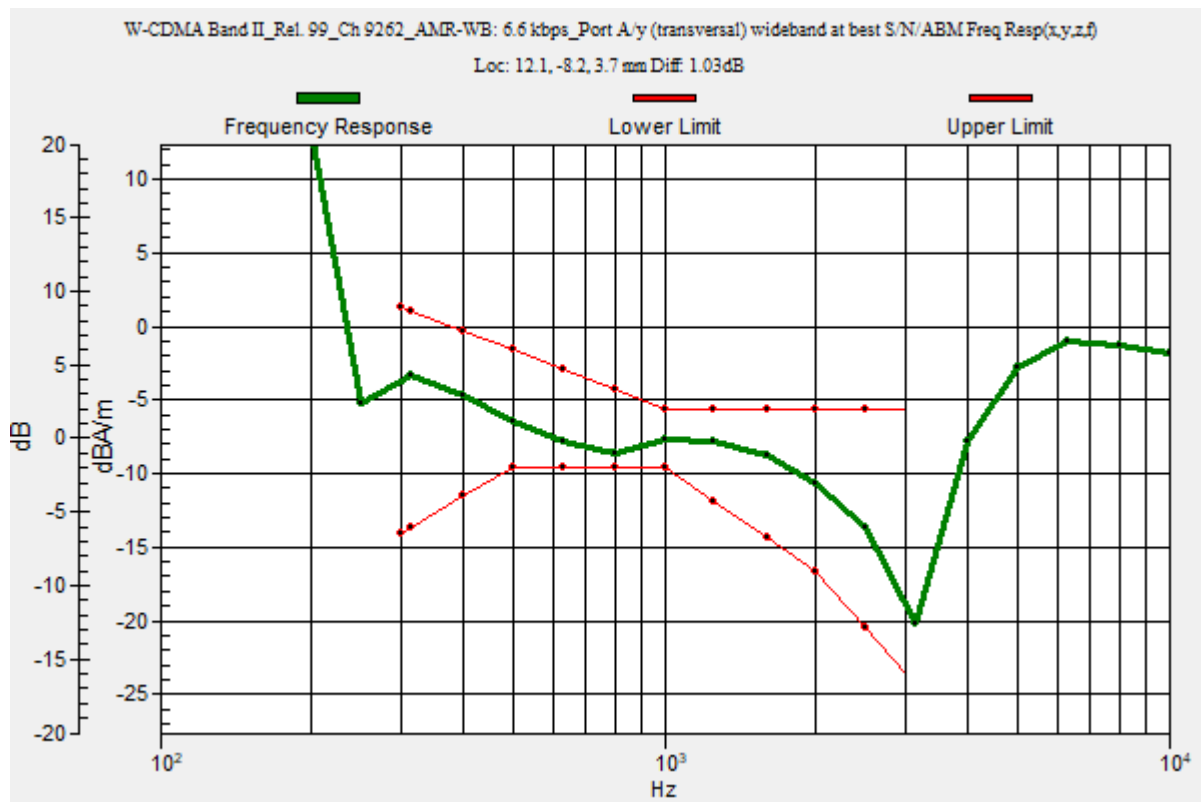

## W-CDMA Band II

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band II\_Rel. 99\_Ch 9262\_AMR-WB: 6.6 kbps\_Port A/y (transversal) Single Point/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 47.22 dB

ABM1 comp = -5.55 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -8.3, 3.7 mm

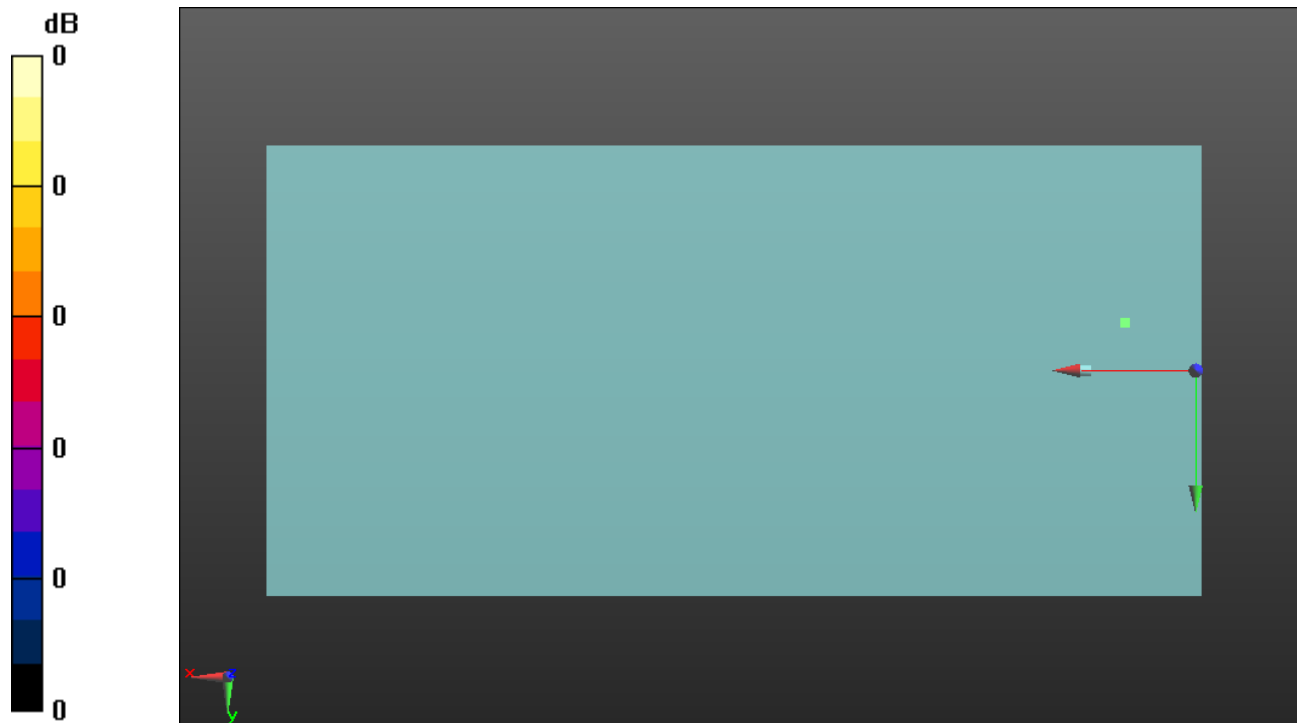

0 dB = 1.000 = 0.00 dB

## W-CDMA Band IV

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band IV\_Rel. 99\_Ch 1312\_AMR-WB: 6.6 kbps\_Port A/y (transversal) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.54 dB

BWC Factor = 10.80 dB

Location: 12.1, -10.7, 3.7 mm

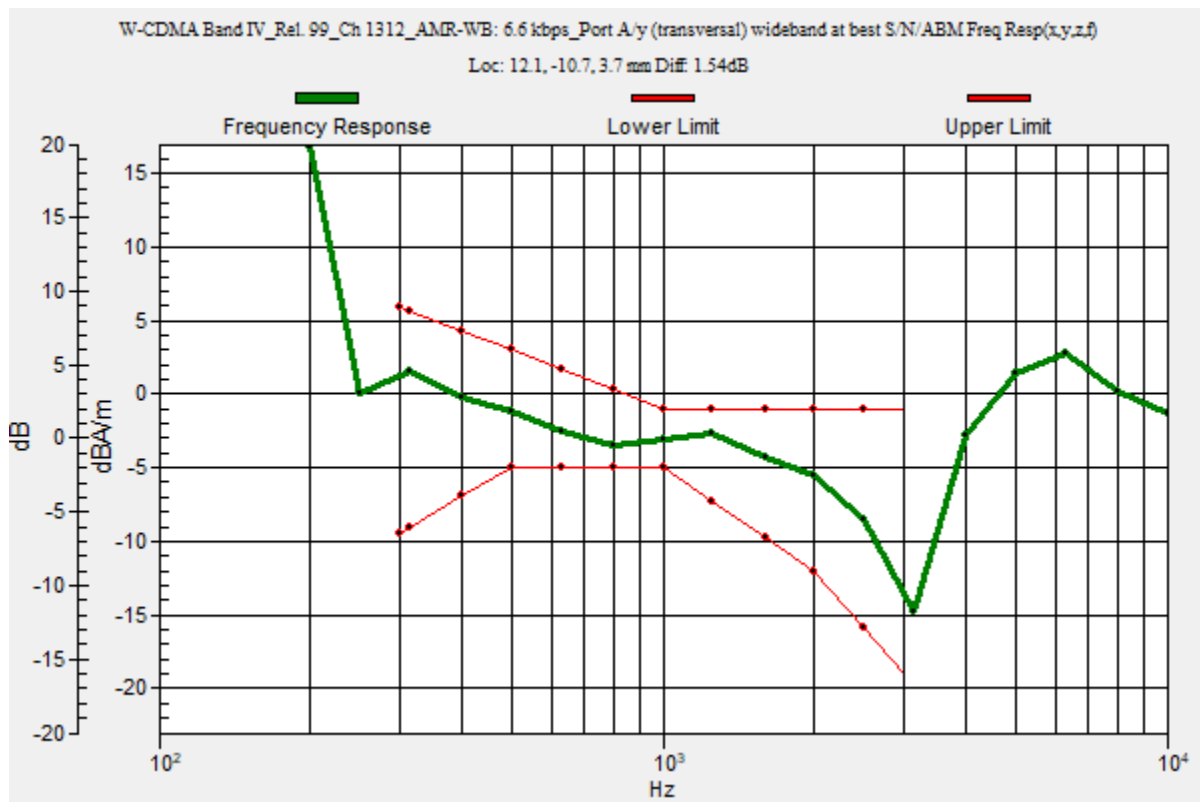

## W-CDMA Band IV

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band IV\_Rel. 99\_Ch 1312\_AMR-WB: 6.6 kbps\_Port A/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 47.89 dB

ABM1 comp = -4.96 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -10.4, 3.7 mm

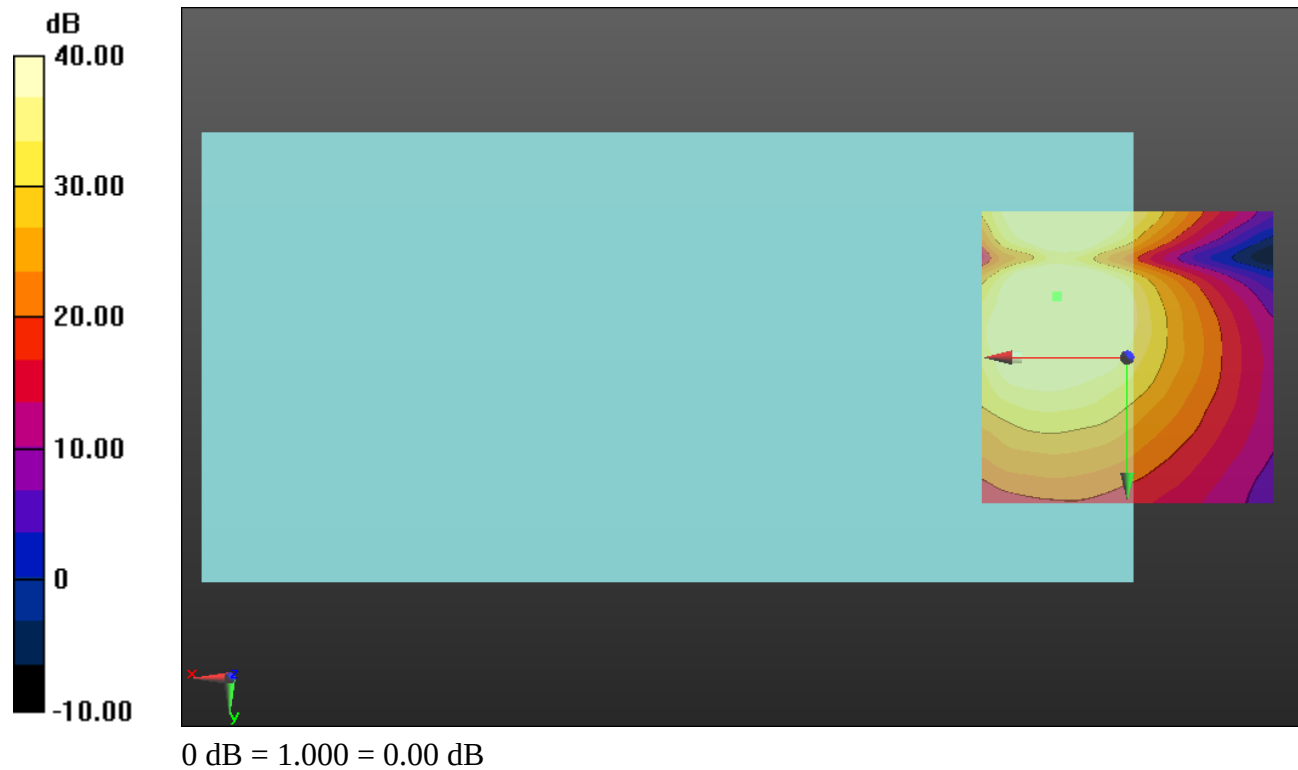



## W-CDMA Band V

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 826.4 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band V\_Rel. 99\_Ch 4132\_AMR-WB: 6.6 kbps\_Port A/y (transversal) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.53 dB

BWC Factor = 10.80 dB

Location: 12.1, -10.7, 3.7 mm

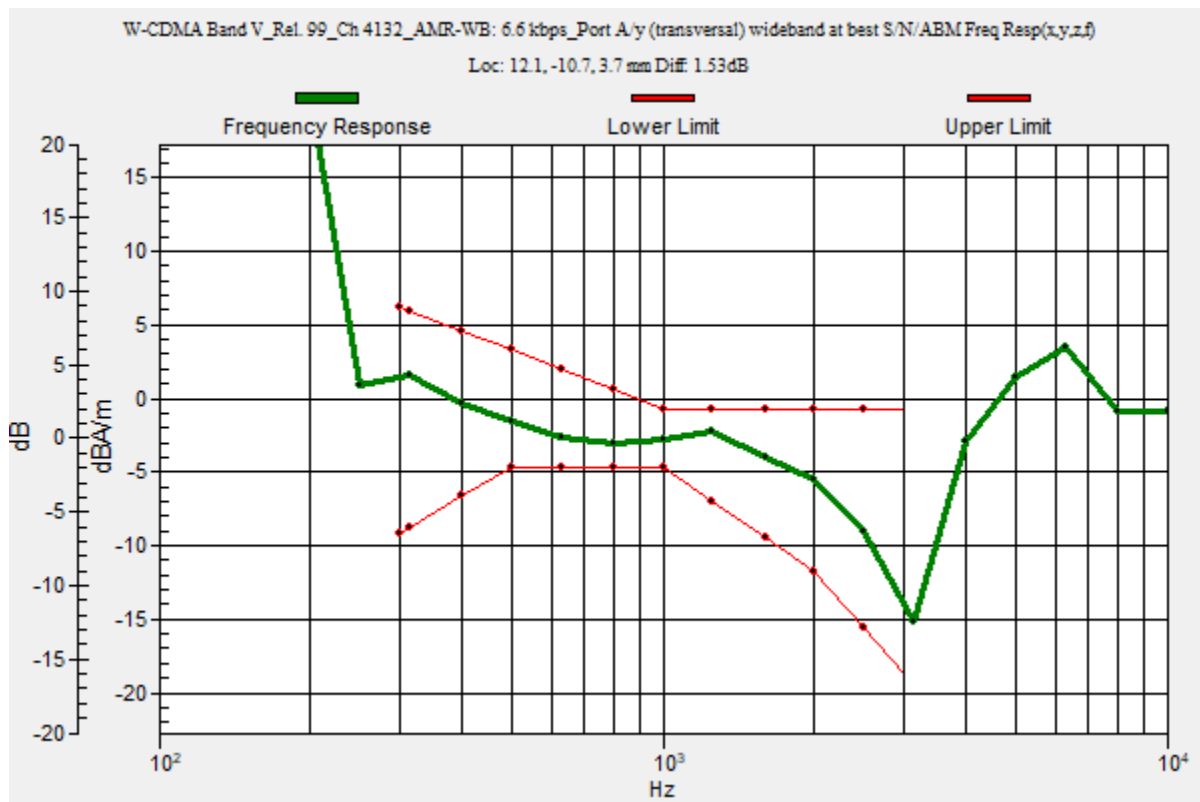

## W-CDMA Band V

Communication System: UID 0, 1@UMTS-FDD (WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA Band V\_Rel. 99\_Ch 4132\_AMR-WB: 6.6 kbps\_Port A/y (transversal) Single Point/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 47.94 dB

ABM1 comp = -5.08 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -10.7, 3.7 mm

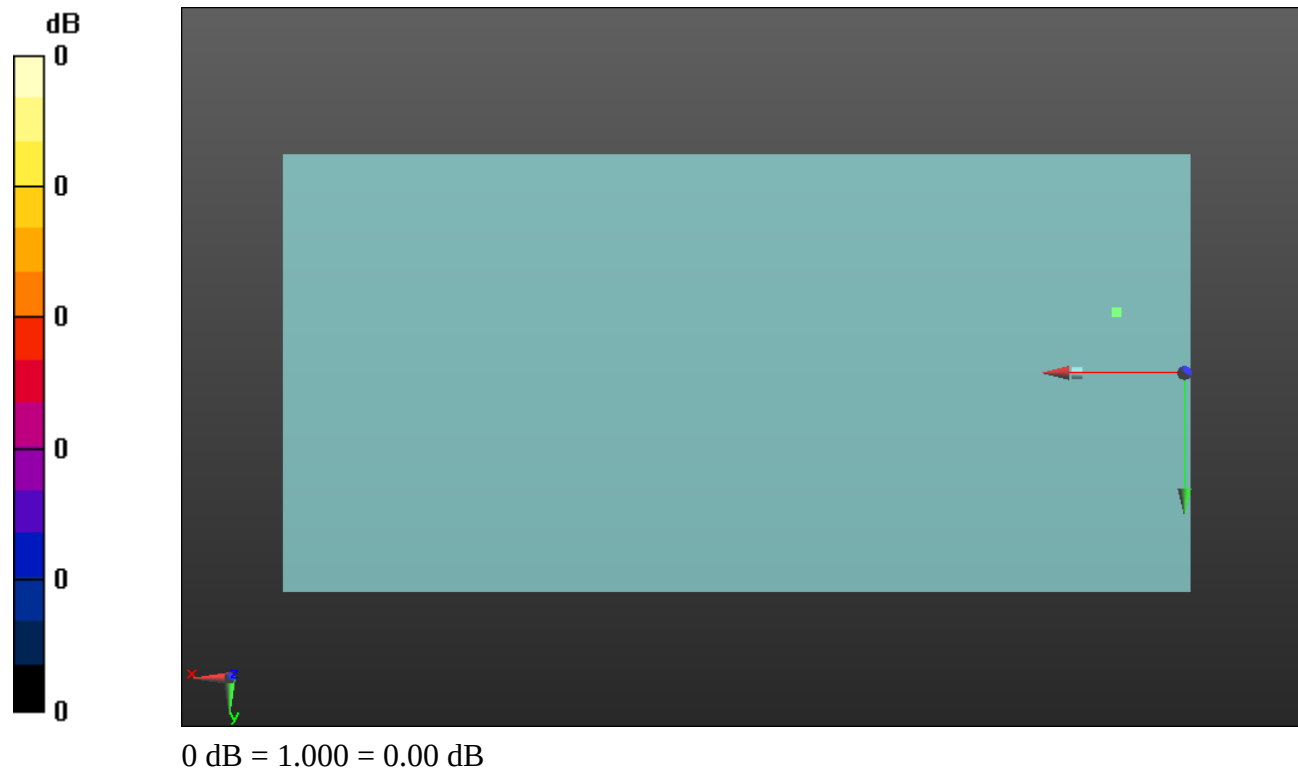

## LTE Band 2

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1880 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 2\_QPSK 20MHz BW\_RB 1,49\_Ch 18900\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best S/N/ABM**

**Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.58 dB

BWC Factor = 10.80 dB

Location: 12.7, -8.4, 3.7 mm

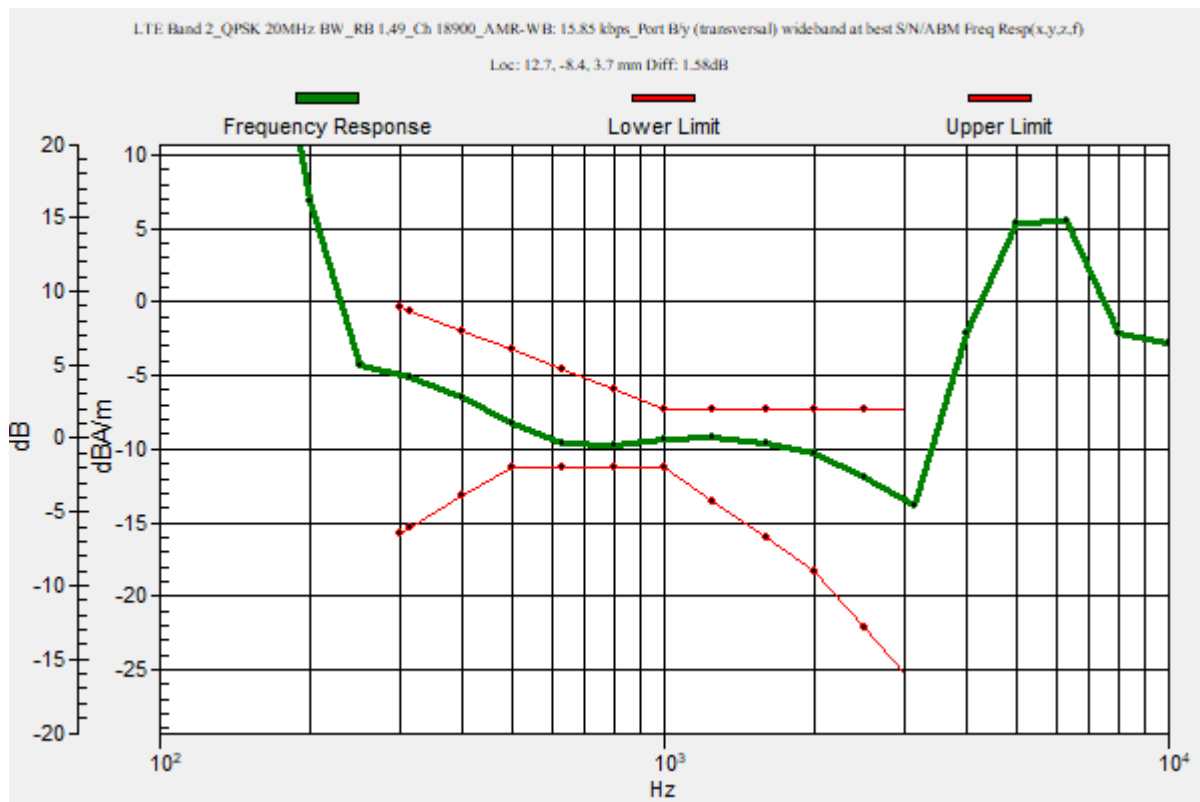

## LTE Band 2

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 2\_QPSK 20MHz BW\_RB 1,49\_Ch 18900\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x 50/ABM

**Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 45.32 dB

ABM1 comp = -6.48 dBA/m

BWC Factor = 0.16 dB

Location: 12.9, -8.3, 3.7 mm

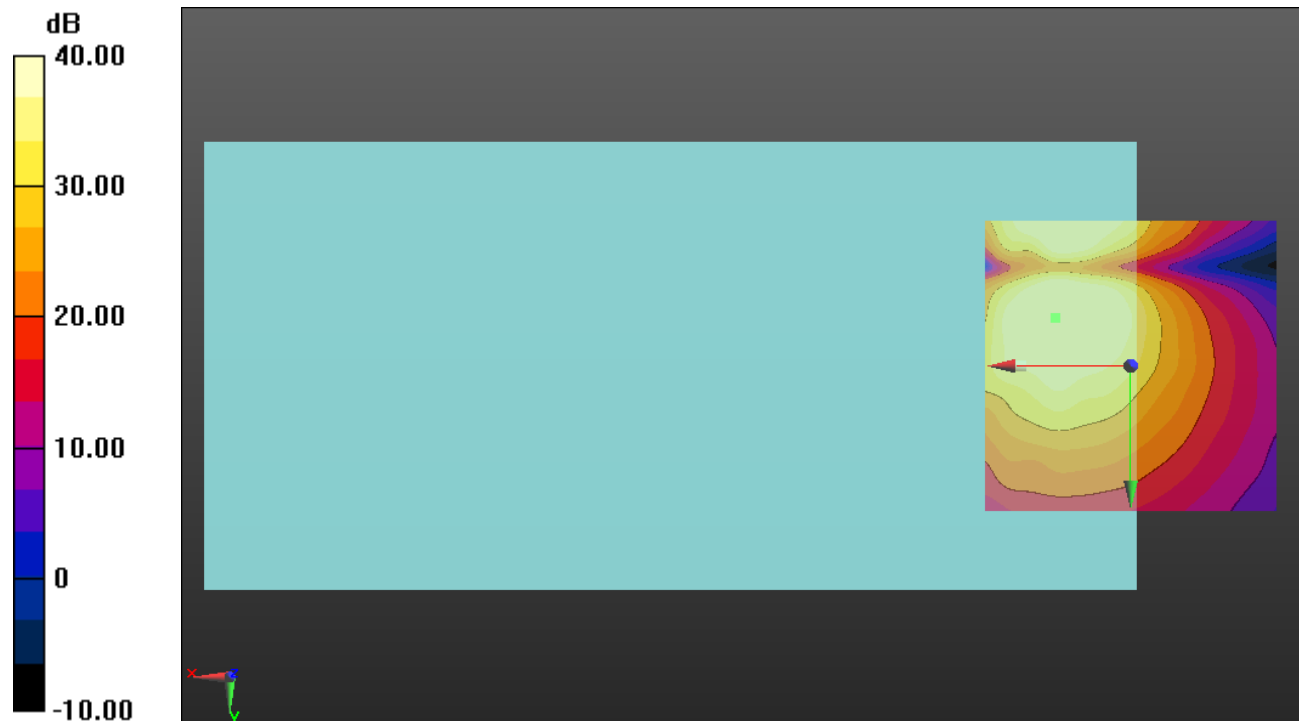

0 dB = 1.000 = 0.00 dB

## LTE Band 4

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 4\_QPSK 20MHz BW\_RB 1,49\_Ch 20175\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best S/N/ABM

**Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.27 dB

BWC Factor = 10.80 dB

Location: 12.1, -9, 3.7 mm

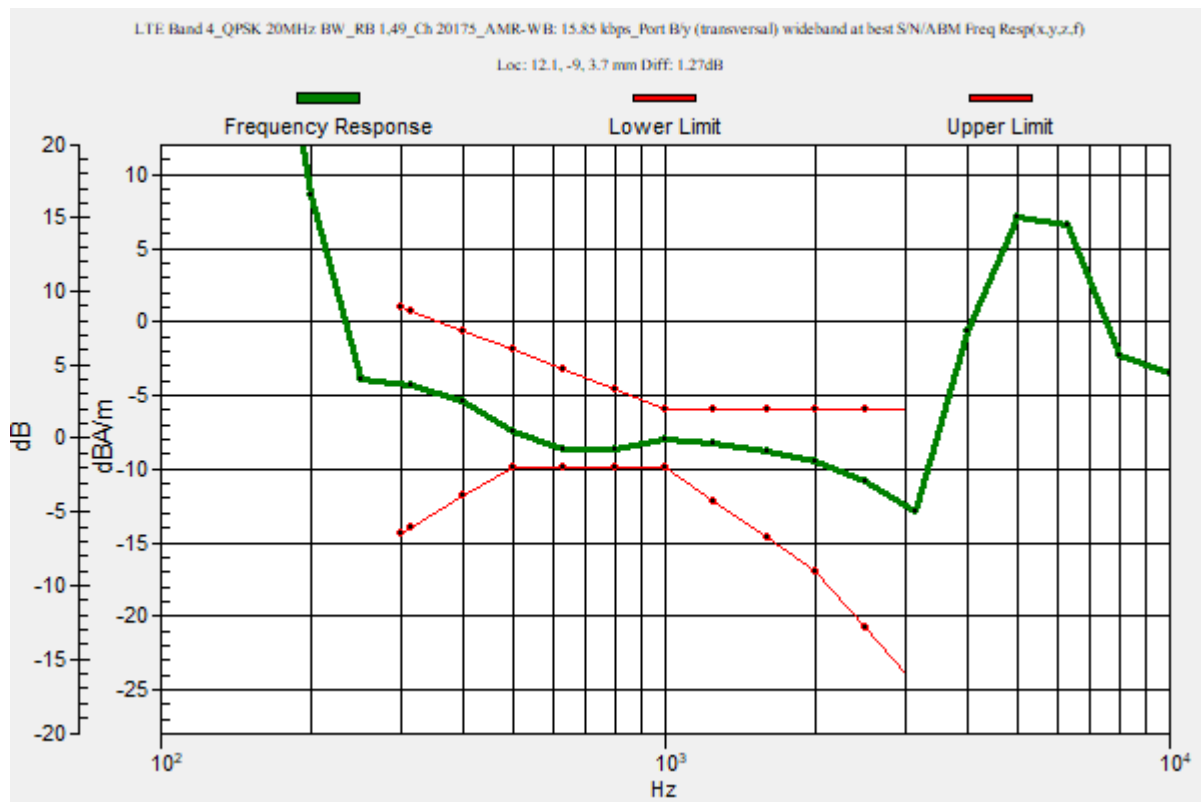

## LTE Band 4

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 4\_QPSK 20MHz BW\_RB 1,49\_Ch 20175\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x 50/ABM

**Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 45.67 dB

ABM1 comp = -6.53 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -9.2, 3.7 mm

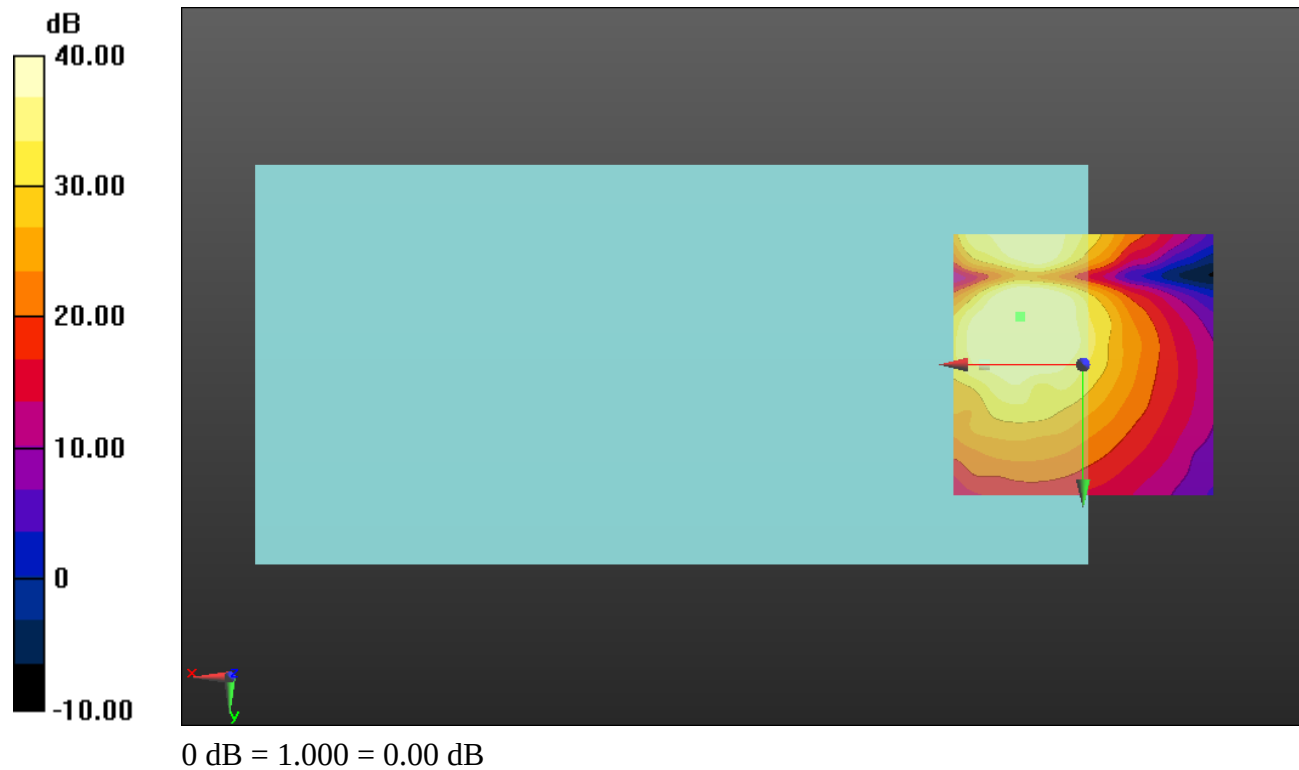

## LTE Band 5

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 5\_QPSK 10MHz BW\_RB 1,25\_Ch 20525\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best S/N/ABM**

**Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.53 dB

BWC Factor = 10.80 dB

Location: 16.3, -8.5, 3.7 mm

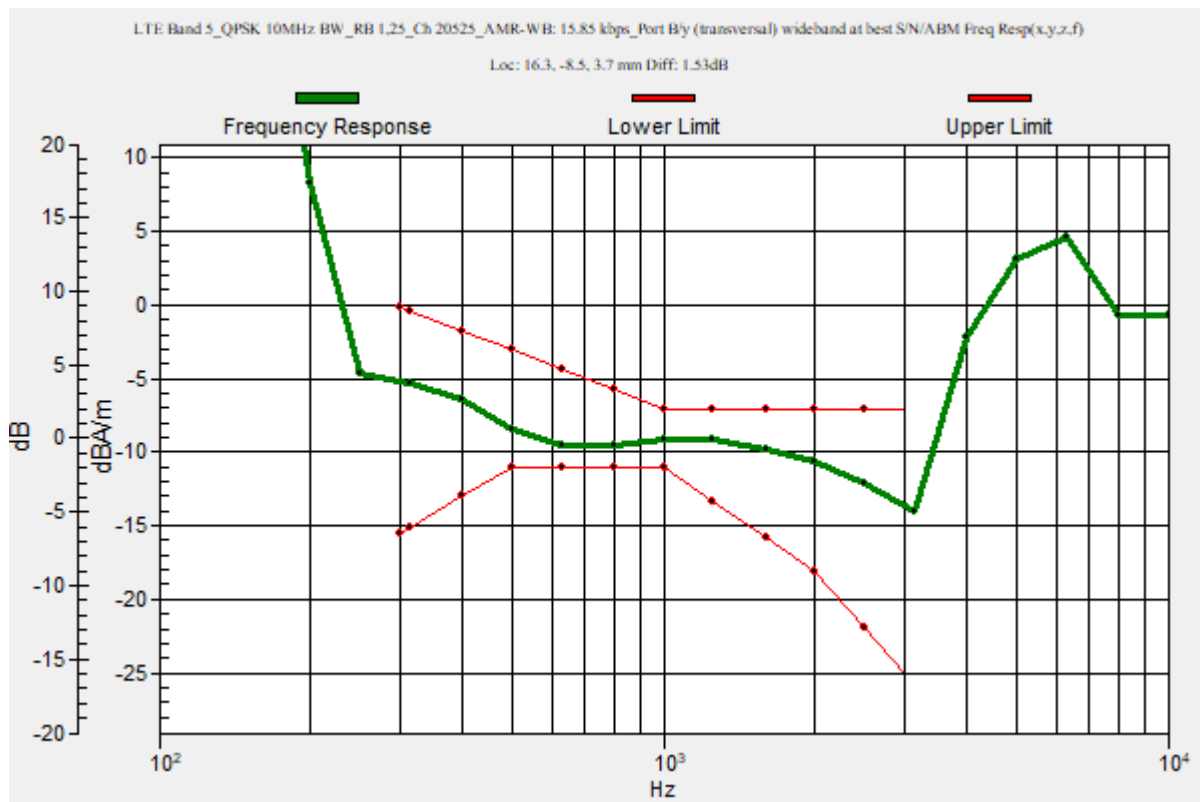

## LTE Band 5

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 5\_QPSK 10MHz BW\_RB 1,25\_Ch 20525\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 43.41 dB

ABM1 comp = -6.66 dBA/m

BWC Factor = 0.16 dB

Location: 16.3, -8.5, 3.7 mm

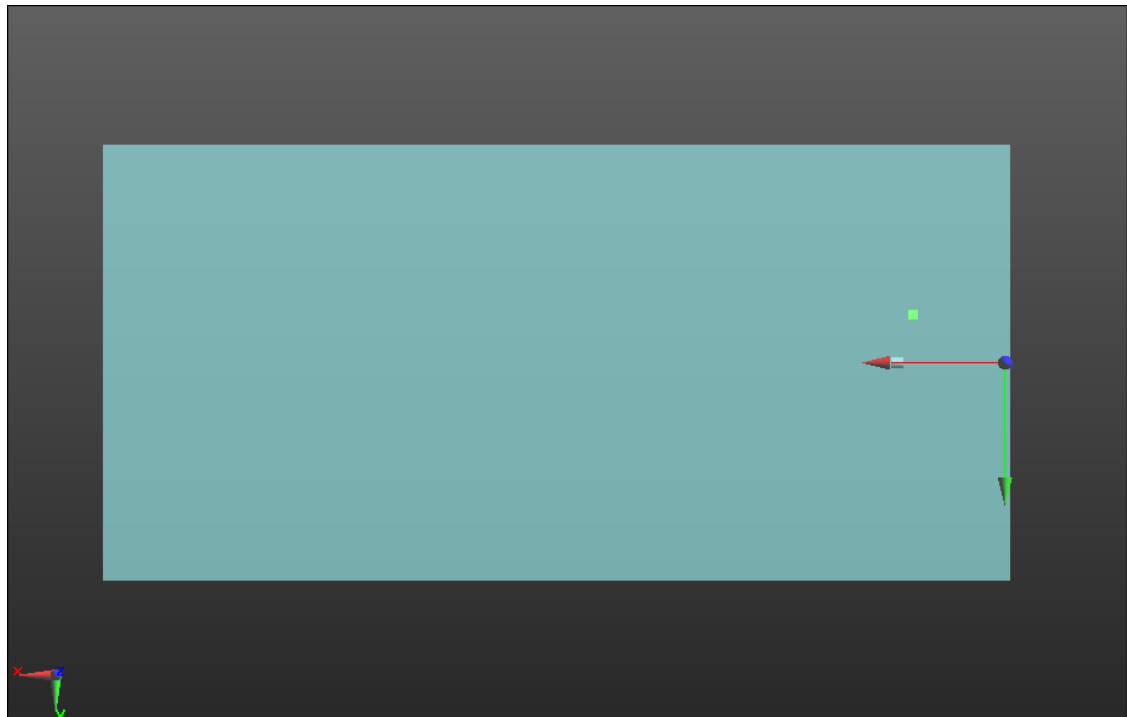

0 dB = 1.000 = 0.00 dB



## LTE Band 7

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 2535 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 7\_QPSK 20MHz BW\_RB 1,49\_Ch 21100\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best S/N/ABM**

**Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.57 dB

BWC Factor = 10.80 dB

Location: 8.7, -8.4, 3.7 mm

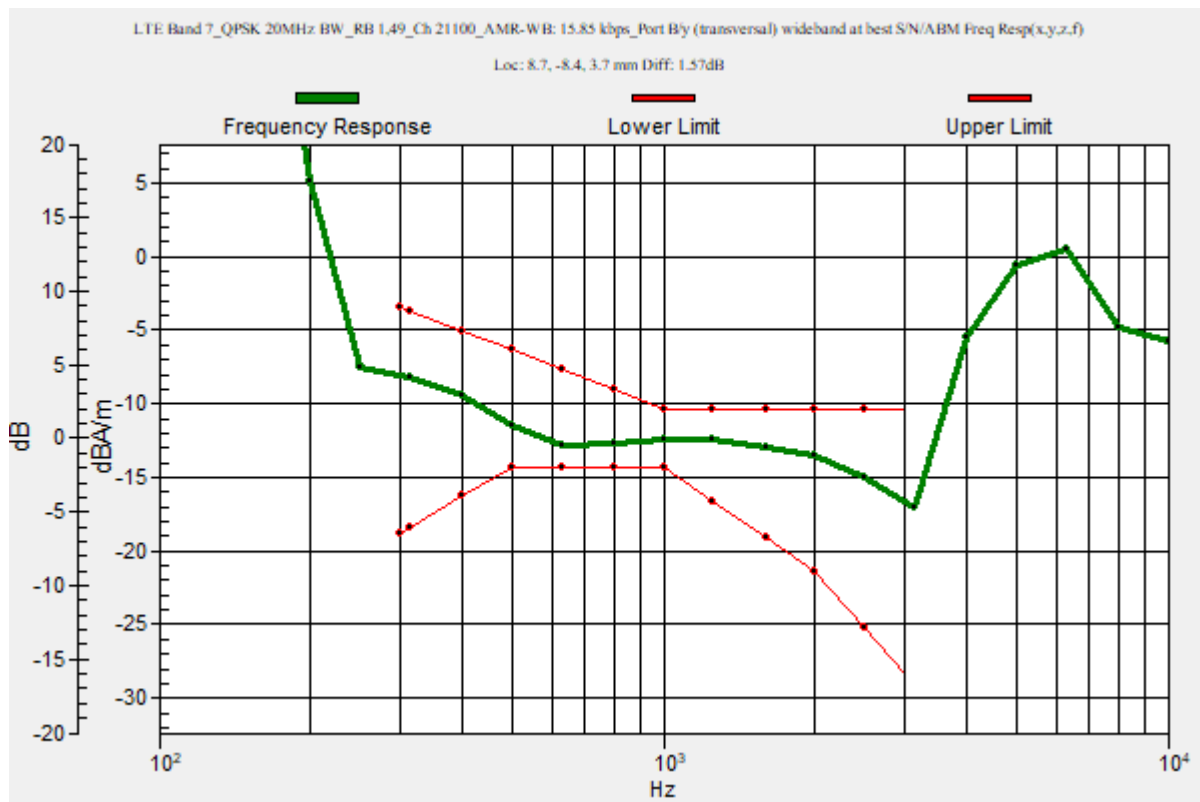

## LTE Band 7

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 7\_QPSK 20MHz BW\_RB 1,49\_Ch 21100\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x 50/ABM

**Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 42.51 dB

ABM1 comp = -8.60 dBA/m

BWC Factor = 0.16 dB

Location: 8.8, -8.3, 3.7 mm

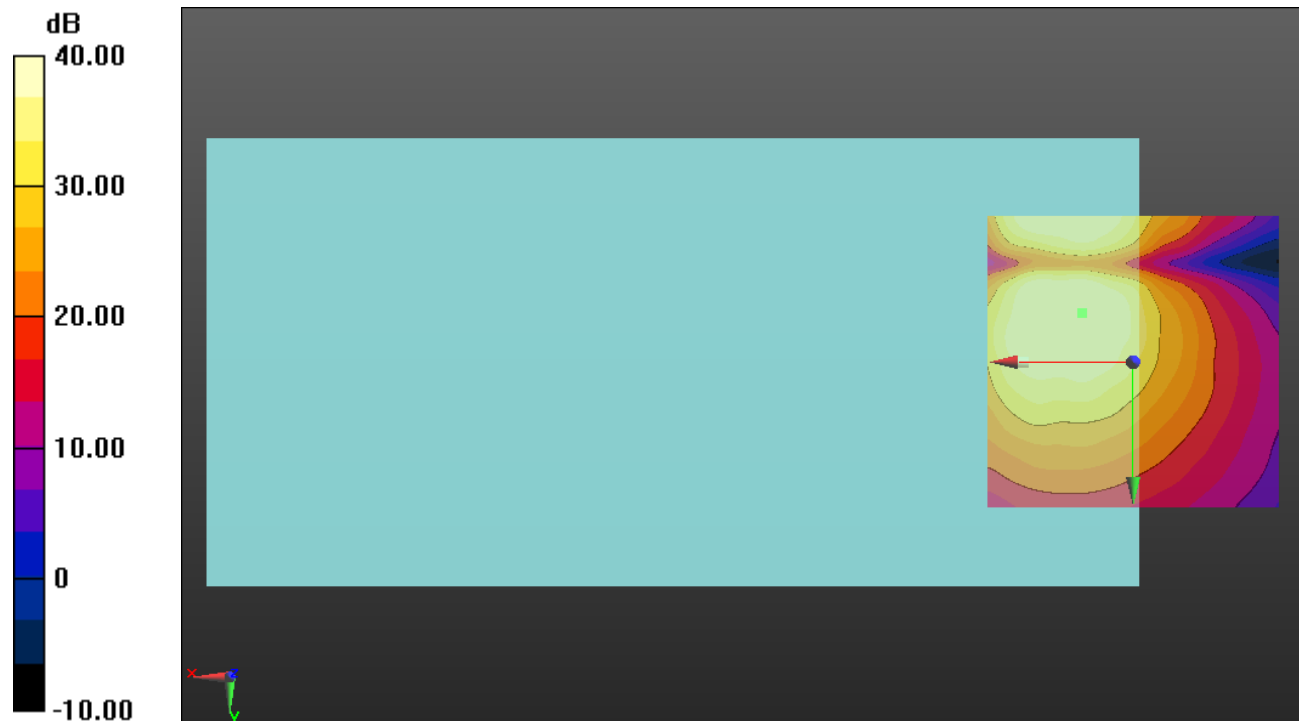

0 dB = 1.000 = 0.00 dB

**LTE Band 12**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 12\_QPSK 10MHz  
BW\_RB 1,25\_Ch 23095\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.59 dB

BWC Factor = 10.80 dB

Location: 12.8, -8.5, 3.7 mm

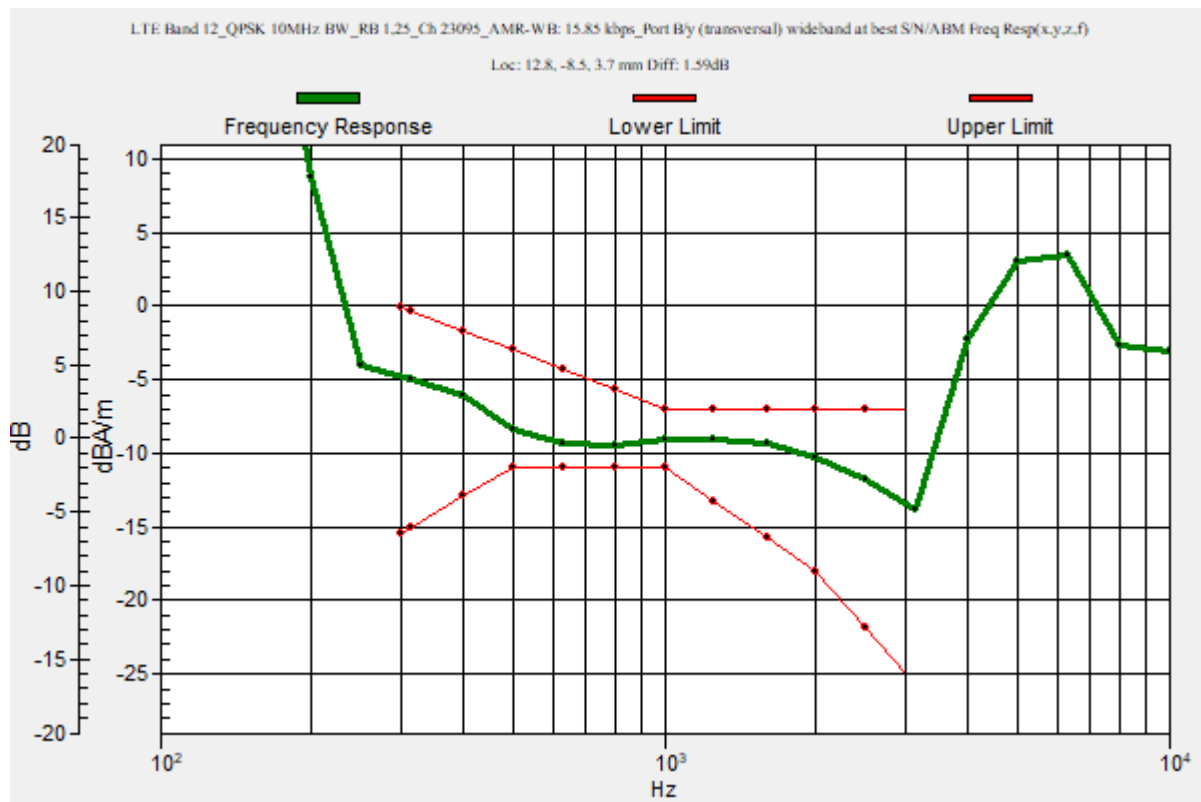

## LTE Band 12

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 12\_QPSK 10MHz  
BW\_RB 1,25\_Ch 23095\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x  
50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 43.89 dB

ABM1 comp = -6.47 dBA/m

BWC Factor = 0.16 dB

Location: 12.9, -8.3, 3.7 mm

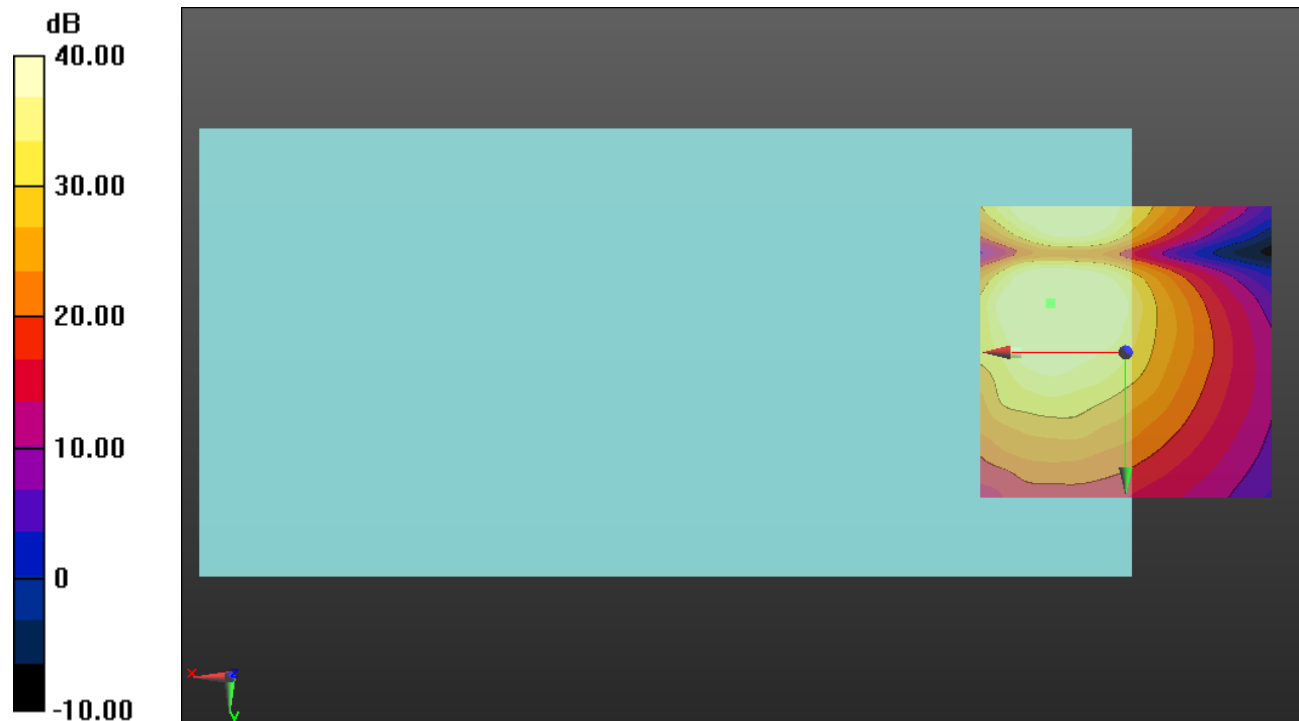

0 dB = 1.000 = 0.00 dB

**LTE Band 13**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 782 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 13\_QPSK 10MHz  
BW\_RB 1,25\_Ch 23230\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 1.59 dB

BWC Factor = 10.80 dB

Location: 12.8, -8.5, 3.7 mm

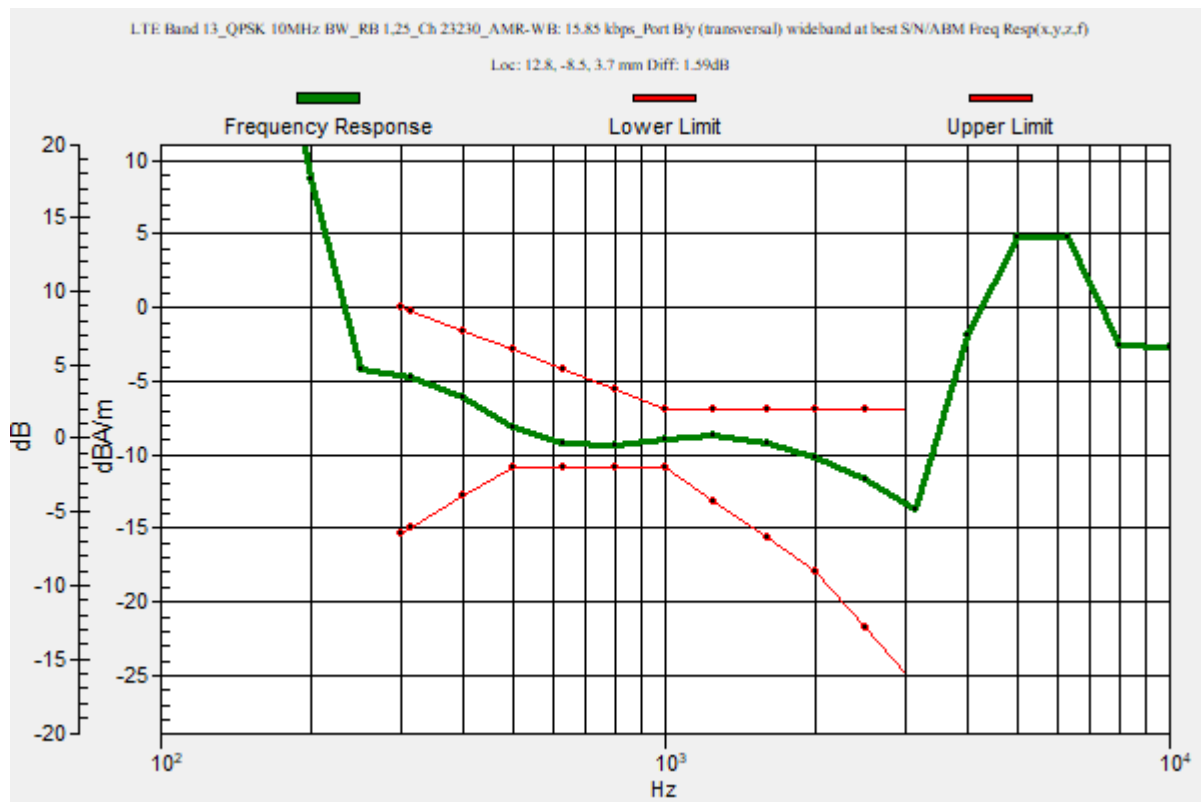

## LTE Band 13

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 782 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 13\_QPSK 10MHz BW\_RB 1,25\_Ch 23230\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 46.08 dB

ABM1 comp = -6.47 dBA/m

BWC Factor = 0.16 dB

Location: 12.8, -8.5, 3.7 mm

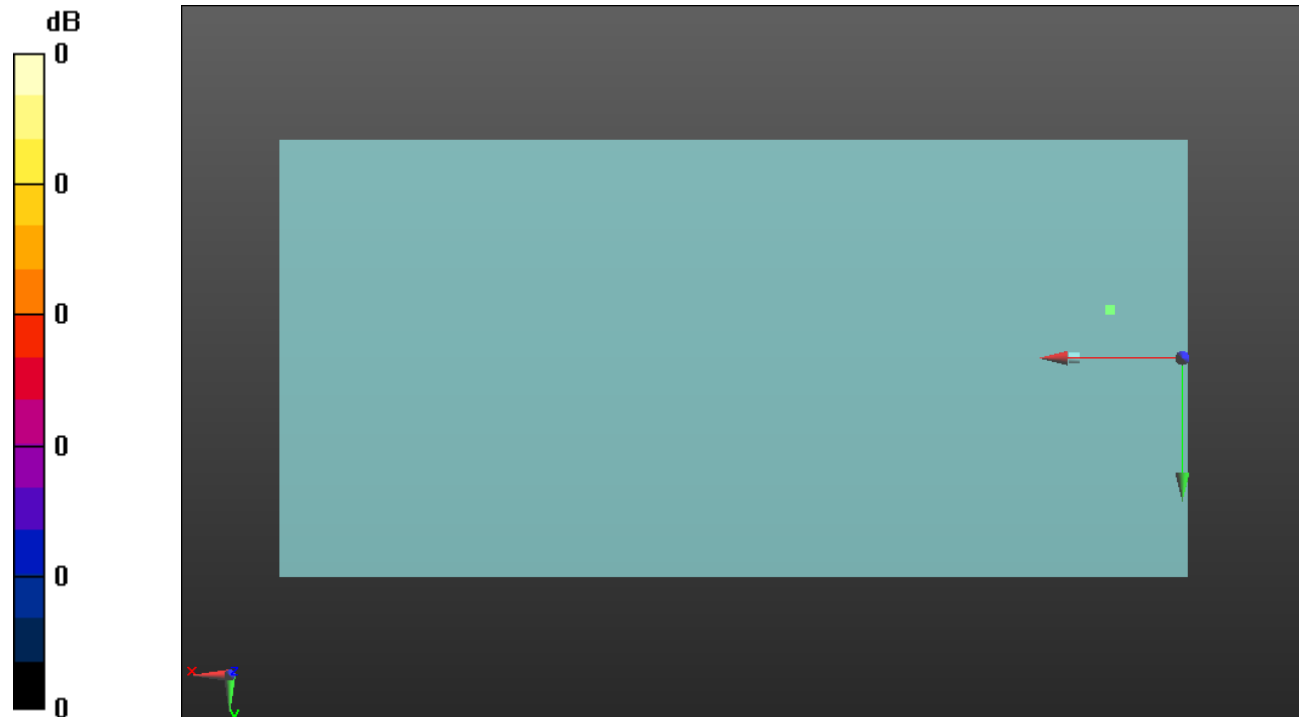

0 dB = 1.000 = 0.00 dB

**LTE Band 14**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 793 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 14\_QPSK 10MHz  
BW\_RB 1,25\_Ch 23330\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.54 dB

BWC Factor = 10.80 dB

Location: 12.8, -8.5, 3.7 mm

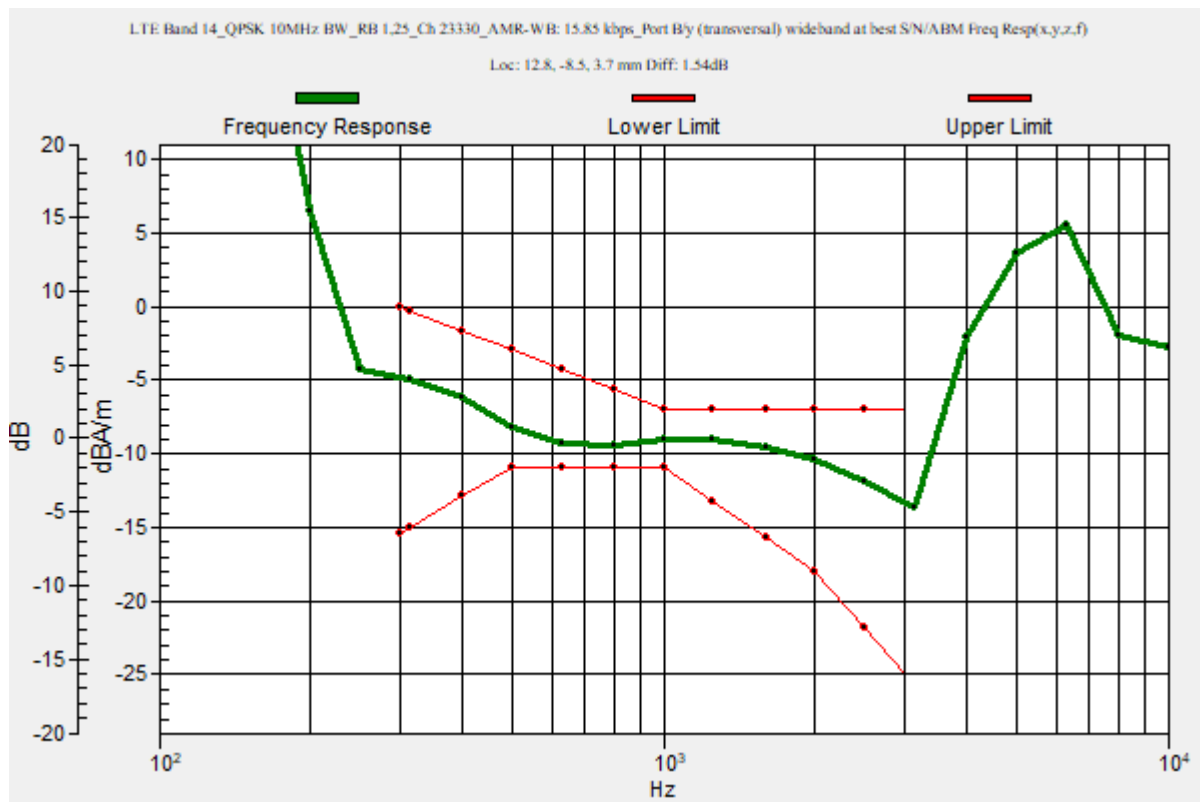

## LTE Band 14

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 793 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 14\_QPSK 10MHz BW\_RB 1,25\_Ch 23330\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 43.86 dB

ABM1 comp = -6.45 dBA/m

BWC Factor = 0.16 dB

Location: 12.8, -8.5, 3.7 mm



0 dB = 1.000 = 0.00 dB



**LTE Band 17**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 710 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 17\_QPSK 10MHz  
BW\_RB 1,25\_Ch 23790\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.41 dB

BWC Factor = 10.80 dB

Location: 12.8, -8.5, 3.7 mm

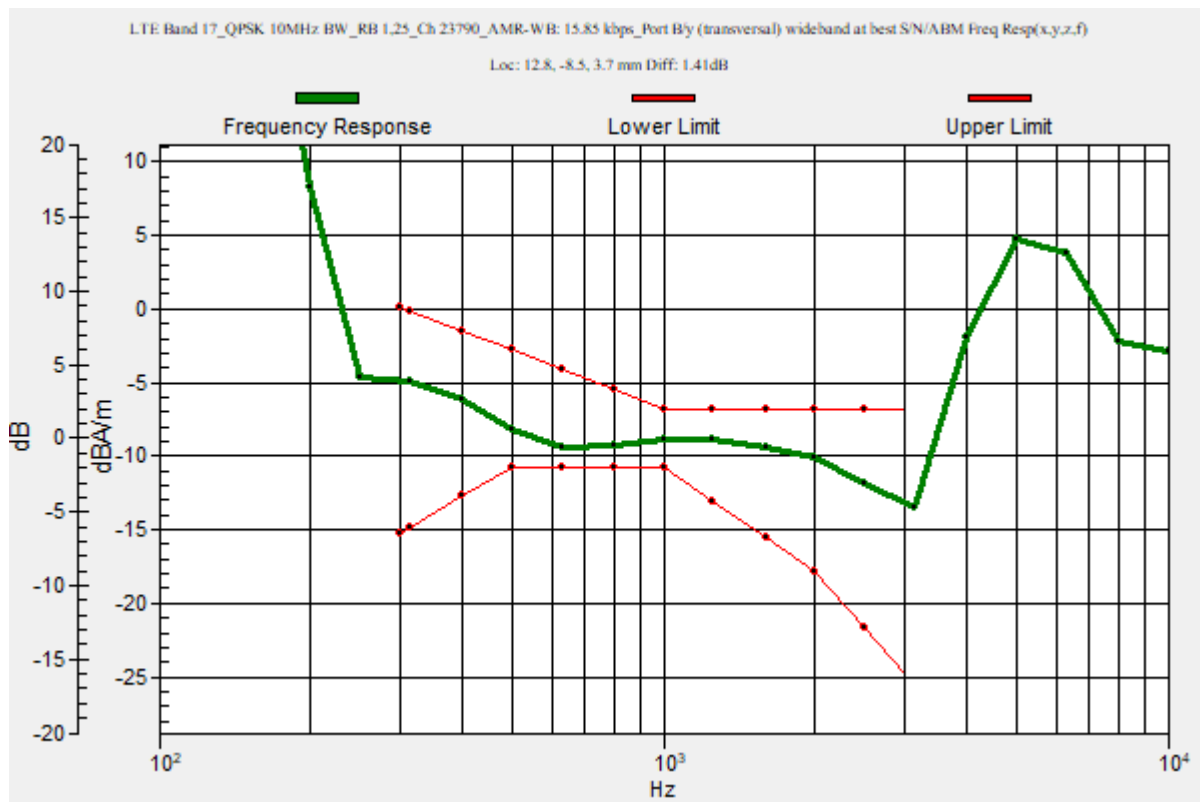

## LTE Band 17

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 710 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 17\_QPSK 10MHz BW\_RB 1,25\_Ch 23790\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 46.05 dB

ABM1 comp = -6.47 dBA/m

BWC Factor = 0.16 dB

Location: 12.8, -8.5, 3.7 mm



0 dB = 1.000 = 0.00 dB

**LTE Band 25**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 25\_QPSK 20MHz  
BW\_RB 1,49\_Ch 26365\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.30 dB

BWC Factor = 10.80 dB

Location: 16.2, -8, 3.7 mm

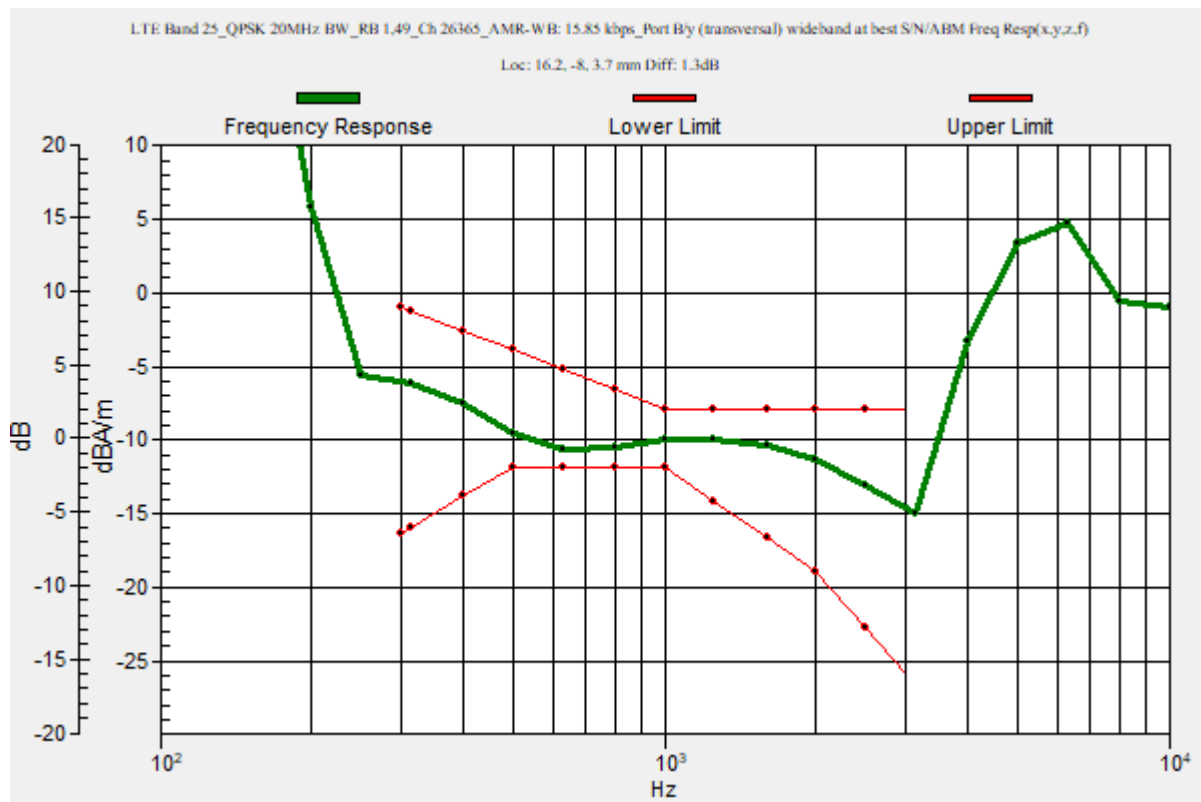

## LTE Band 25

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 25\_QPSK 20MHz BW\_RB 1,49\_Ch 26365\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 41.68 dB

ABM1 comp = -6.26 dBA/m

BWC Factor = 0.16 dB

Location: 16.3, -8, 3.7 mm

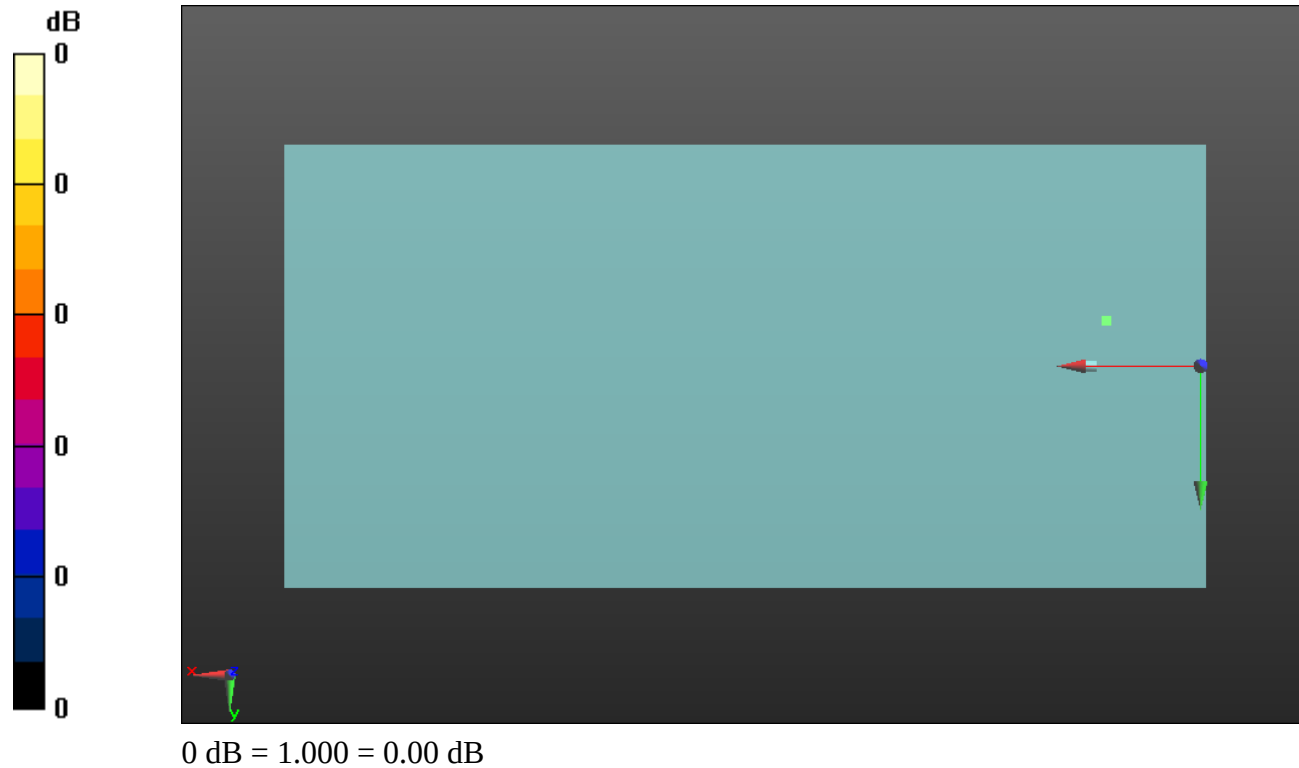

**LTE Band 26**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 26\_QPSK 10MHz  
BW\_RB 1,25\_Ch 26865\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best  
S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.2

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.59 dB

BWC Factor = 10.80 dB

Location: 12, -7.7, 3.7 mm

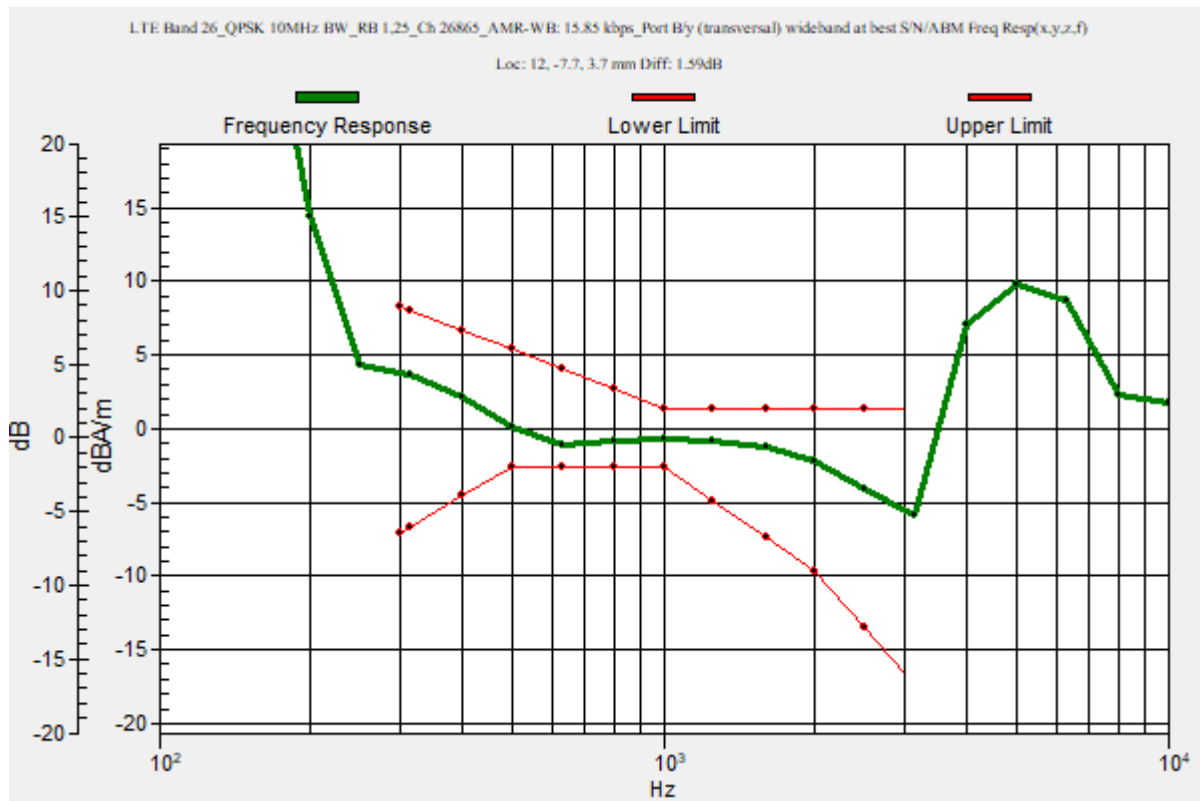

## LTE Band 26

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 26\_QPSK 10MHz  
BW\_RB 1,25\_Ch 26865\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x  
50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.07

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 48.37 dB

ABM1 comp = 1.77 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -7.5, 3.7 mm

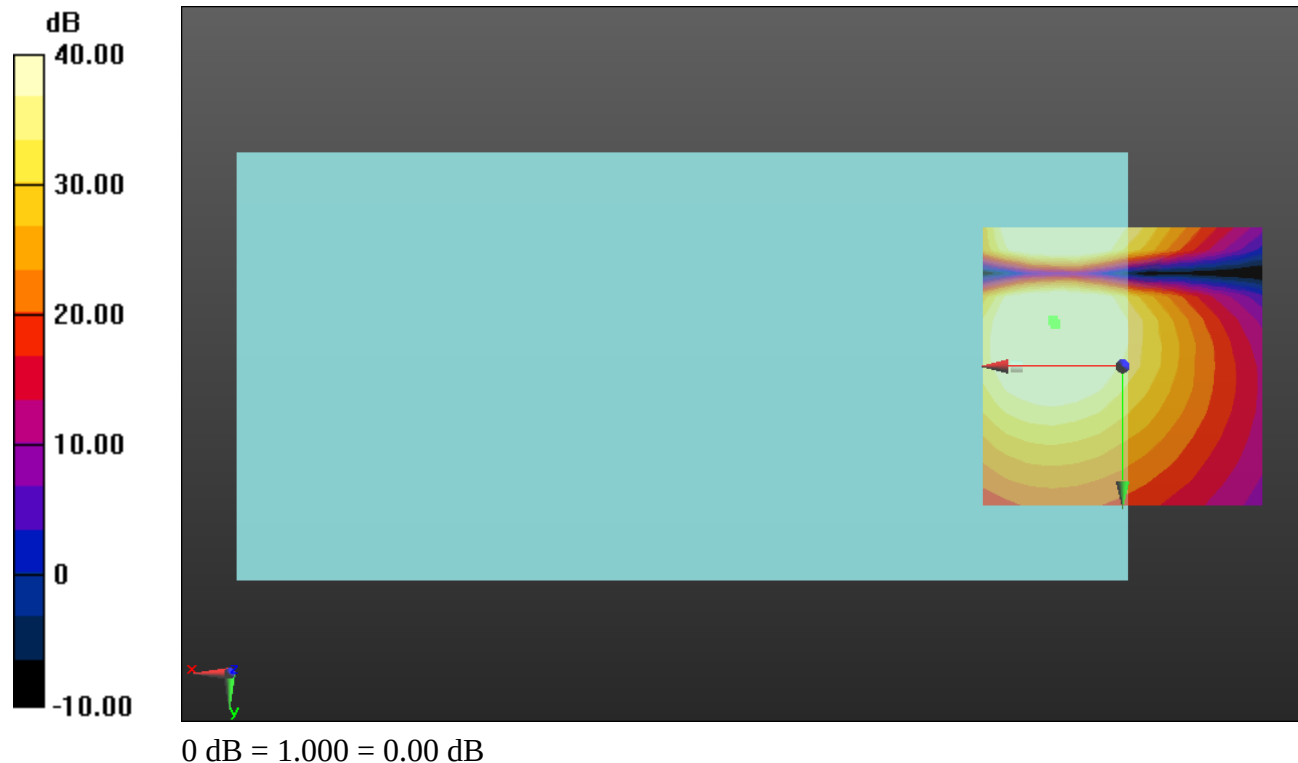

**LTE Band 30**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 2310 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 30\_QPSK 10MHz  
BW\_RB 1,25\_Ch 27710\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.21 dB

BWC Factor = 10.80 dB

Location: 9, -8.7, 3.7 mm

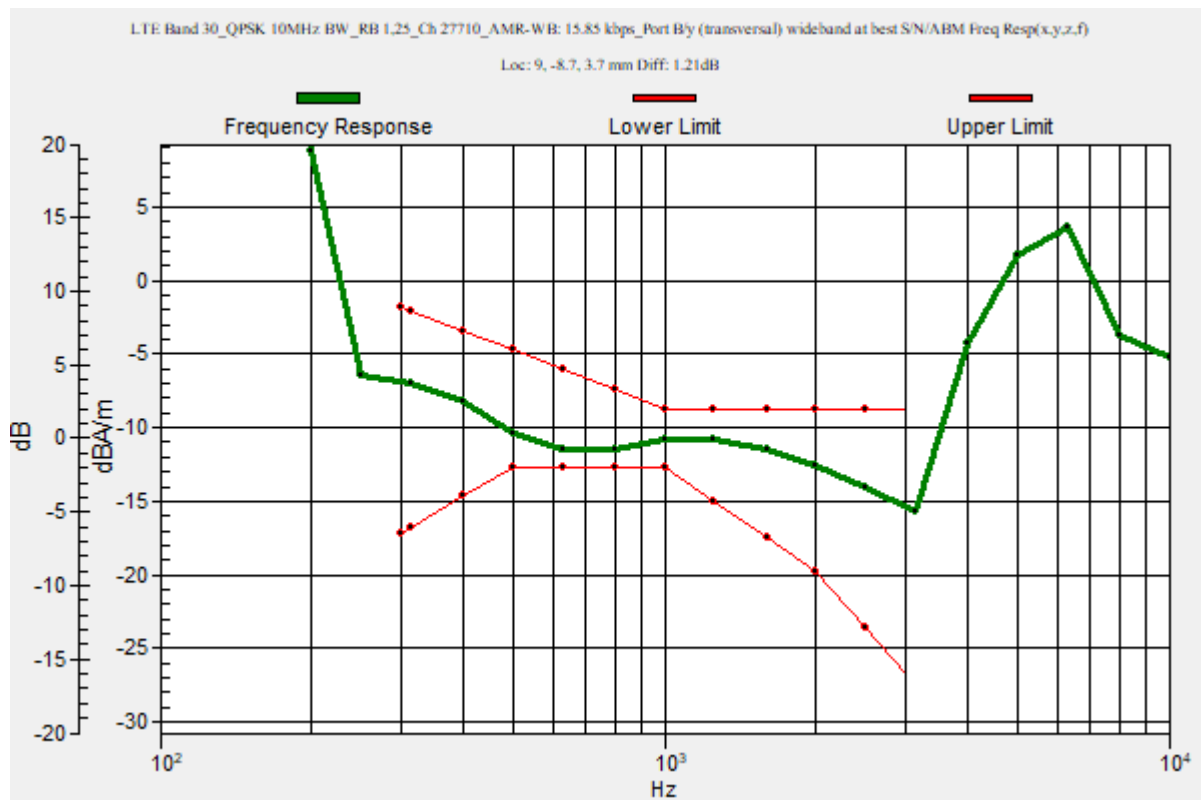

## LTE Band 30

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 30\_QPSK 10MHz  
BW\_RB 1,25\_Ch 27710\_AMR-WB: 15.85 kbps\_Port B/y (transversal) 4.2mm 50 x  
50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 45.55 dB

ABM1 comp = -8.08 dBA/m

BWC Factor = 0.16 dB

Location: 9.2, -8.8, 3.7 mm

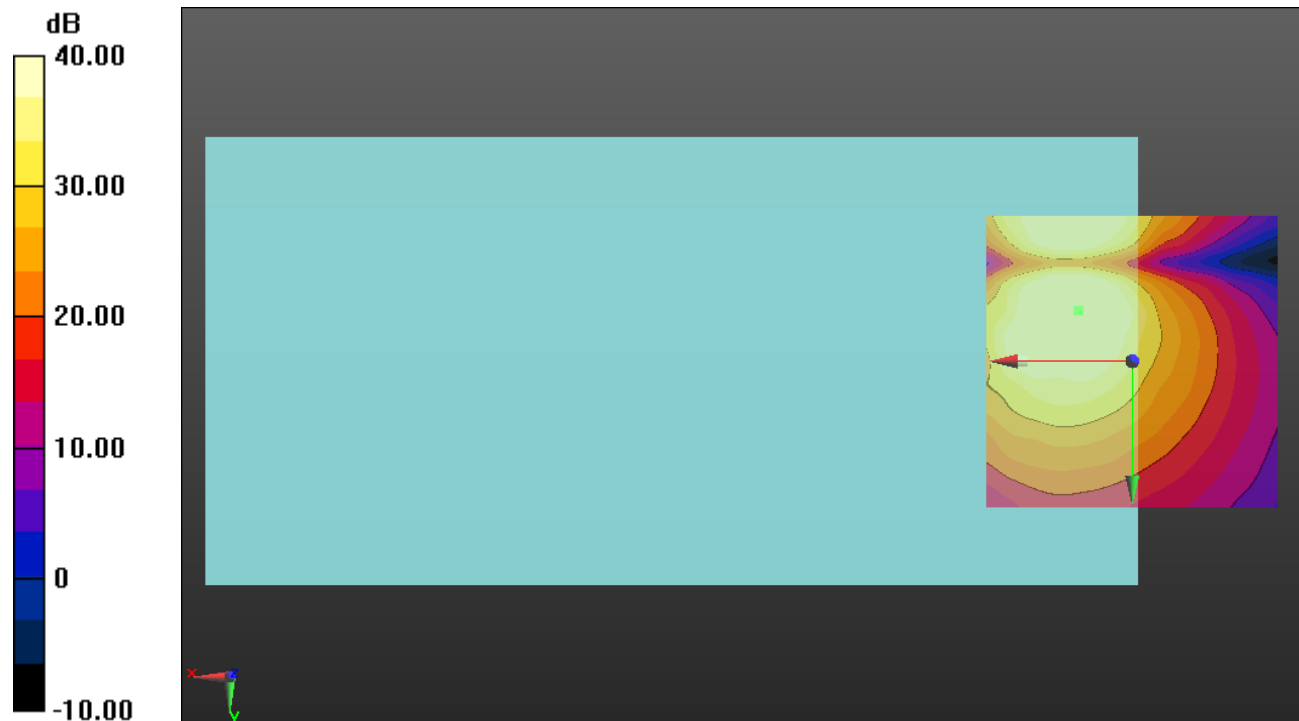

0 dB = 1.000 = 0.00 dB



**LTE Band 41**

Communication System: UID 0, 1@LTE (TDD) (0); Frequency: 2636.5 MHz;Duty Cycle: 1:1.59956

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 41\_QPSK 20MHz  
BW\_RB 50,0\_Ch 41055\_AMR-WB: 23.85 kbps\_Port C/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.35 dB

BWC Factor = 10.80 dB

Location: 12.1, -21.7, 3.7 mm

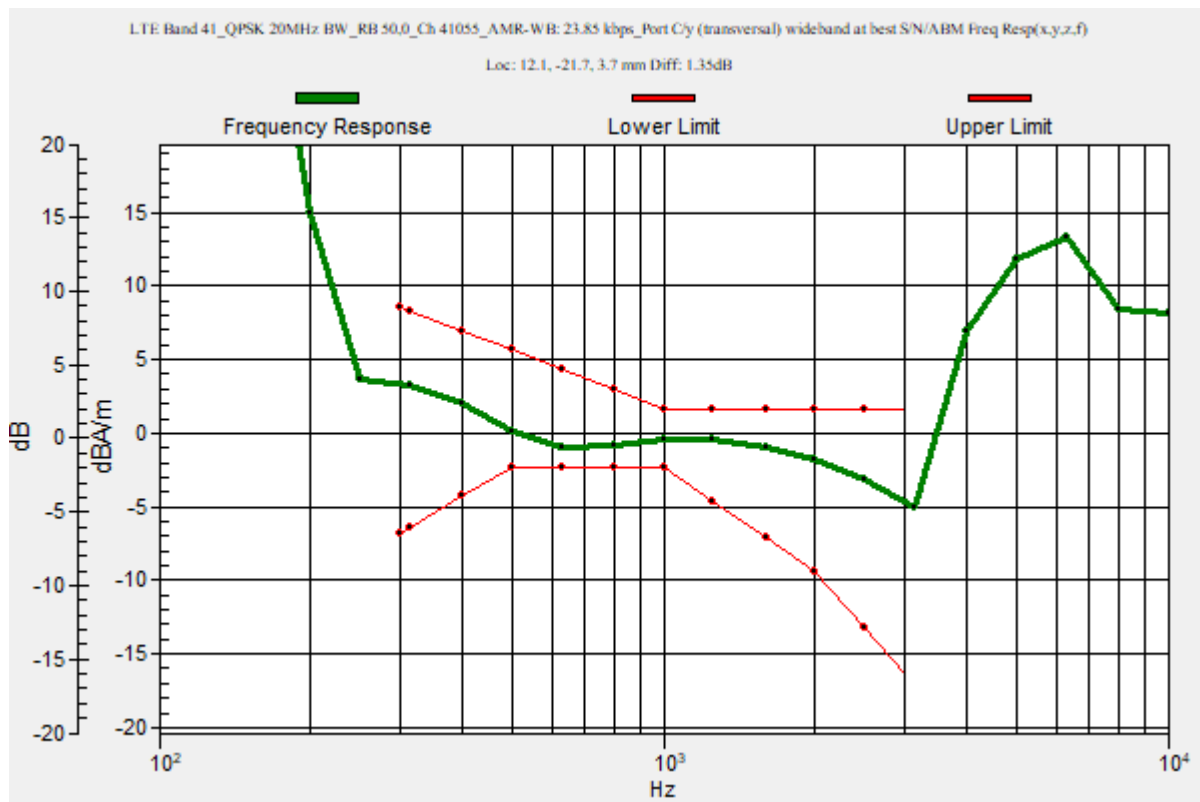

## LTE Band 41

Communication System: UID 0, 1@LTE (TDD) (0); Frequency: 2636.5 MHz; Duty Cycle: 1:1.59956

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 41\_QPSK 20MHz BW\_RB 50,0\_Ch 41055\_AMR-WB: 23.85 kbps\_Port C/y (transversal) Single Point/ABM

**SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 36.11 dB

ABM1 comp = -6.61 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -21.7, 3.7 mm

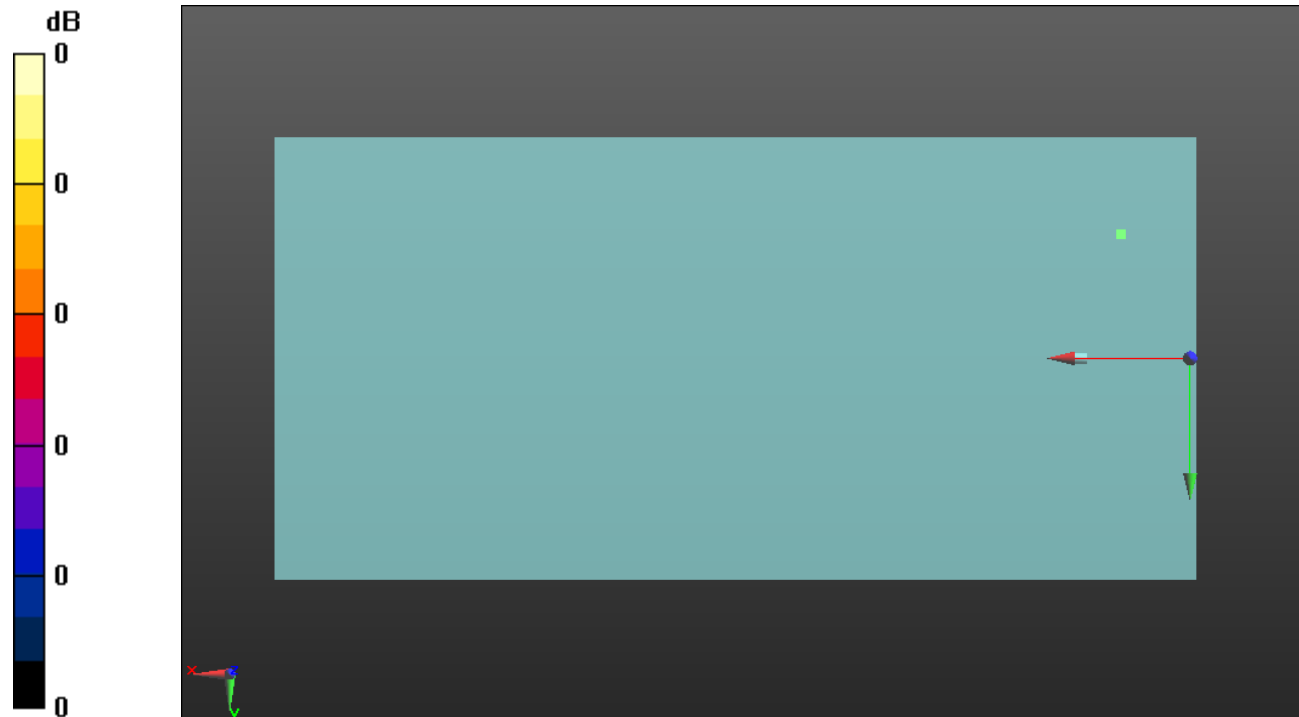

0 dB = 1.000 = 0.00 dB

**LTE Band 48**

Communication System: UID 0, 1@LTE (TDD) (0); Frequency: 3690 MHz;Duty Cycle: 1:1.59956

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 48\_QPSK 20MHz  
BW\_RB 50,0\_Ch 56640\_AMR-WB: 23.85 kbps\_Port C/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.54 dB

BWC Factor = 10.80 dB

Location: 11, -8, 3.7 mm

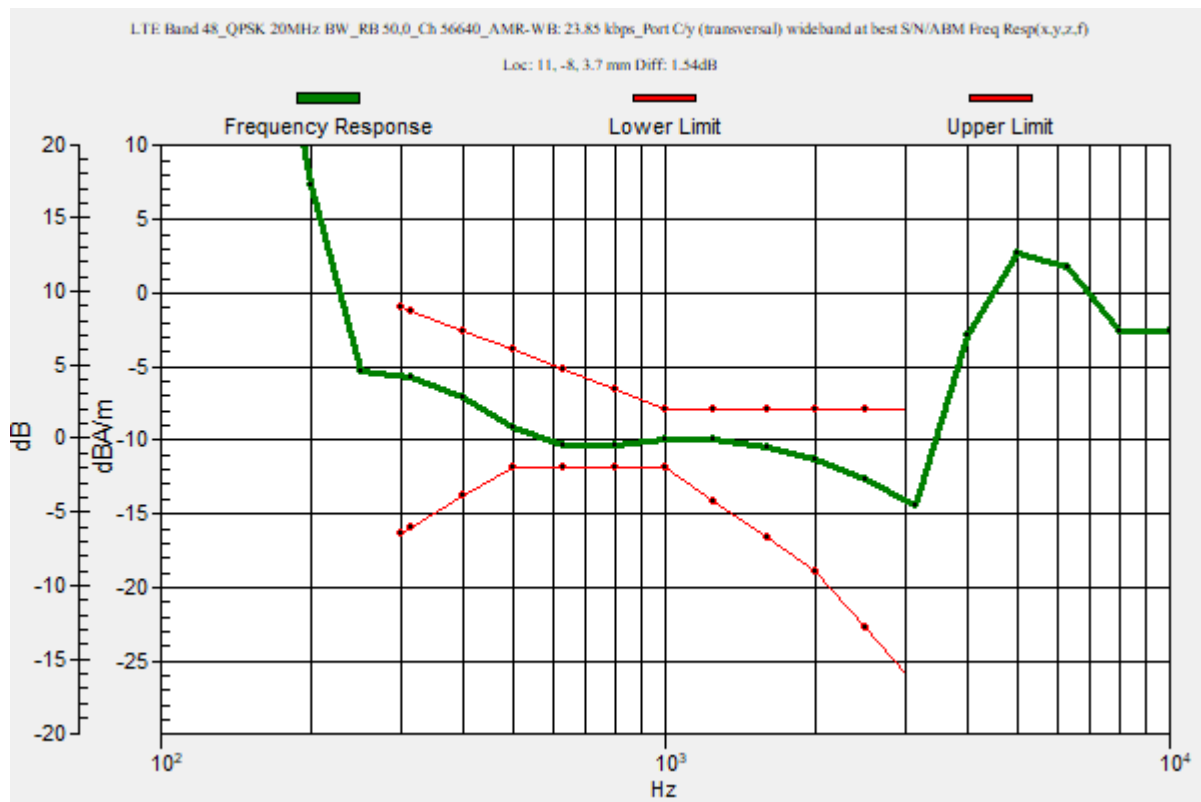

## LTE Band 48

Communication System: UID 0, 1@LTE (TDD) (0); Frequency: 3690 MHz; Duty Cycle: 1:1.59956

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 48\_QPSK 20MHz  
BW\_RB 50,0\_Ch 56640\_AMR-WB: 23.85 kbps\_Port C/y (transversal) 4.2mm 50 x  
50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 45.52 dB

ABM1 comp = -6.27 dBA/m

BWC Factor = 0.16 dB

Location: 11.3, -7.9, 3.7 mm

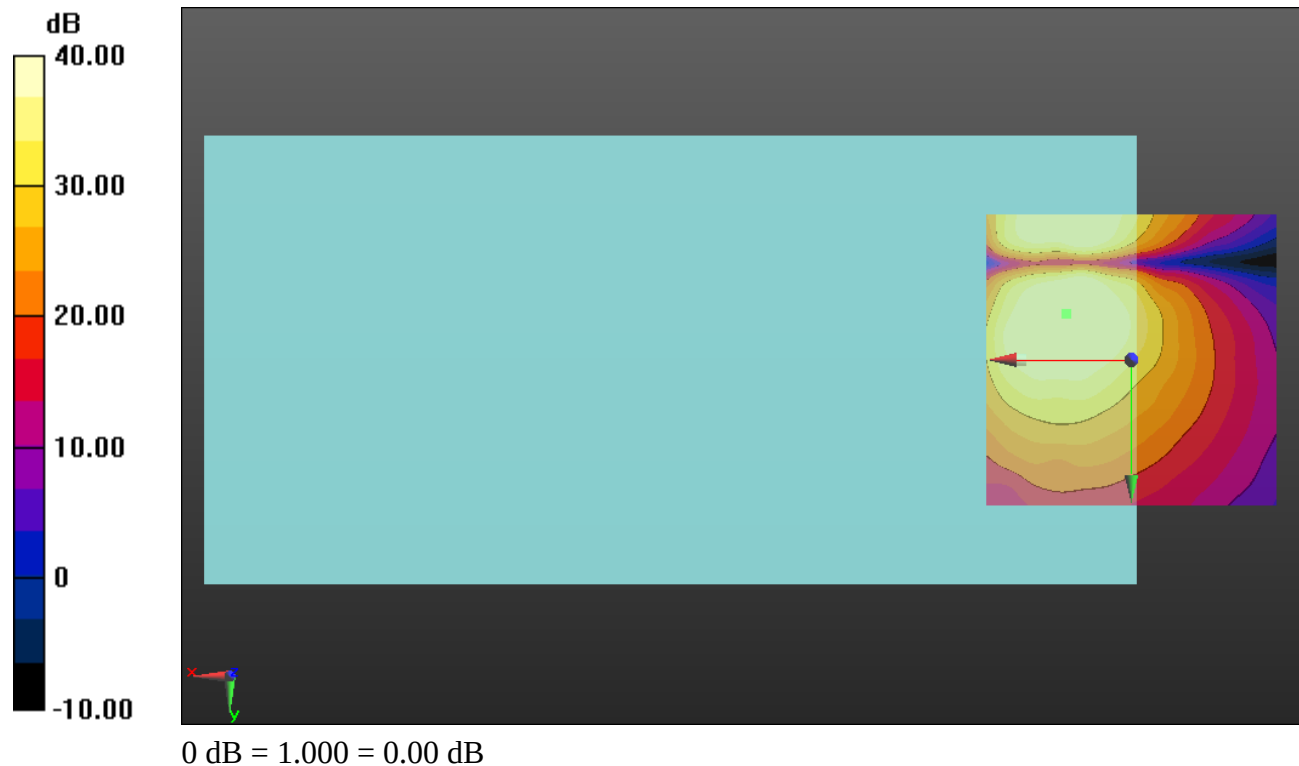

**LTE Band 66**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1745 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 66\_QPSK 20MHz  
BW\_RB 1,49\_Ch 132322\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.55 dB

BWC Factor = 10.80 dB

Location: 8.7, -8.4, 3.7 mm

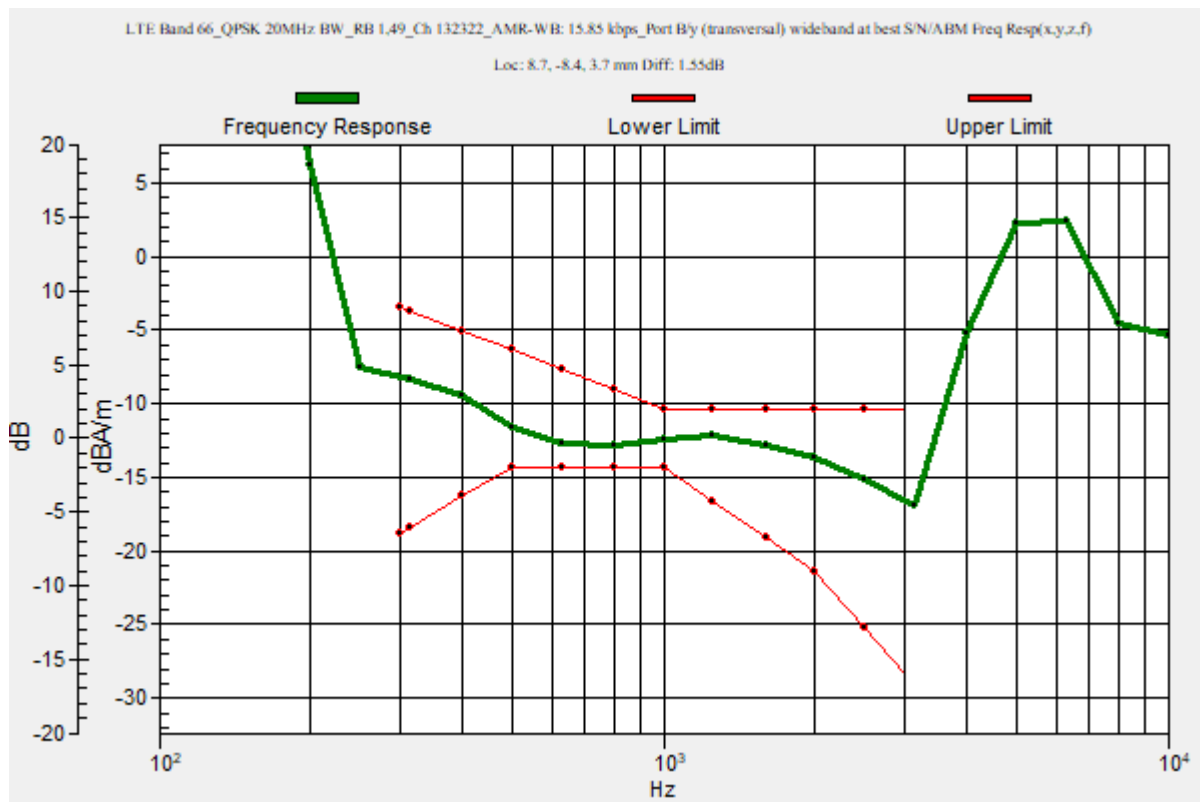

## LTE Band 66

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 66\_QPSK 20MHz  
BW\_RB 1,49\_Ch 132322\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM  
SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 43.46 dB

ABM1 comp = -8.66 dBA/m

BWC Factor = 0.16 dB

Location: 8.8, -8.4, 3.7 mm

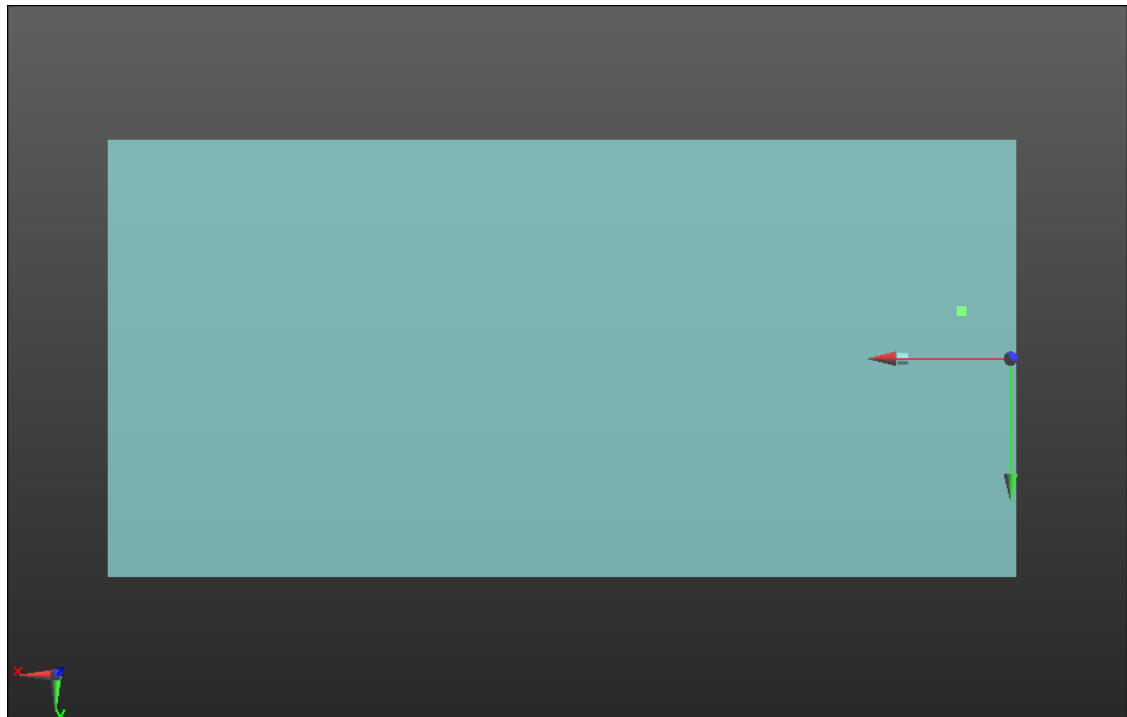

0 dB = 1.000 = 0.00 dB

**LTE Band 71**

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 680.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 71\_QPSK 20MHz  
BW\_RB 1,49\_Ch 133297\_AMR-WB: 15.85 kbps\_Port B/y (transversal) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 47.1

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.43 dB

BWC Factor = 10.80 dB

Location: 8.7, -8.4, 3.7 mm

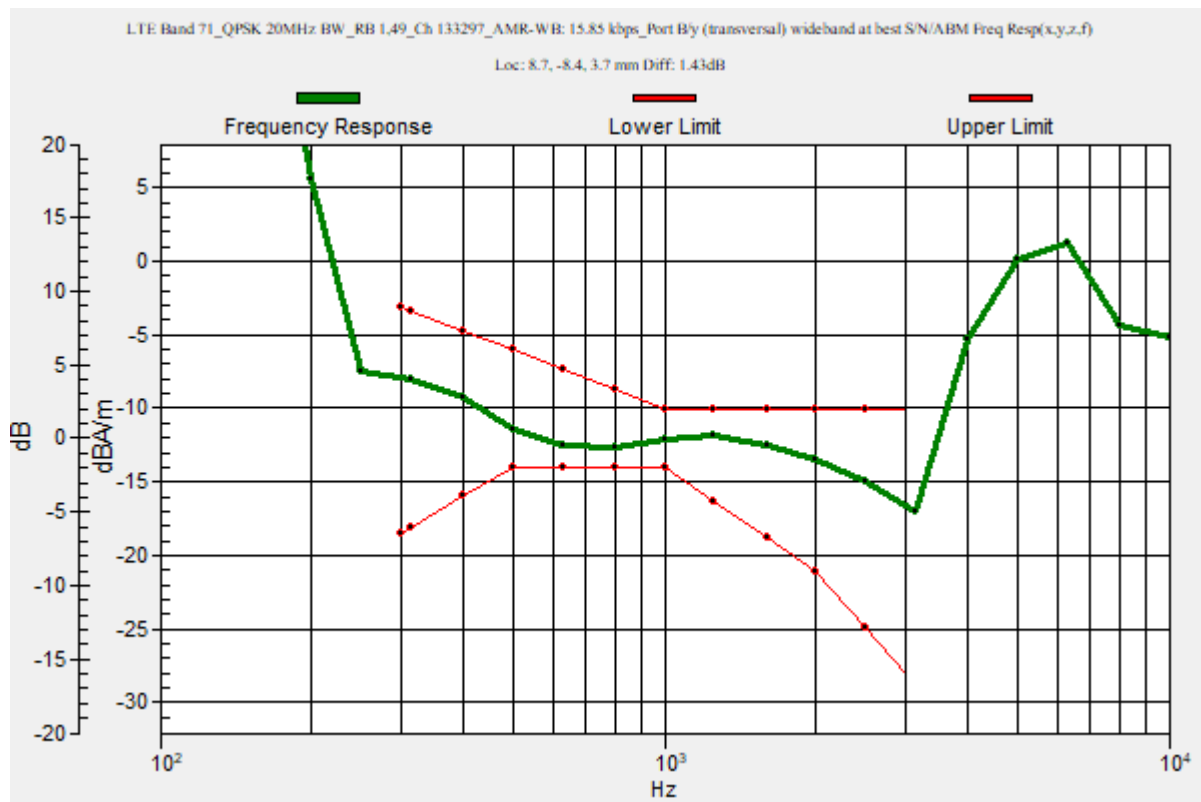

## LTE Band 71

Communication System: UID 0, 1@LTE (FDD) (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 71\_QPSK 20MHz  
BW\_RB 1,49\_Ch 133297\_AMR-WB: 15.85 kbps\_Port B/y (transversal) Single Point/ABM  
SNR(x,y,z) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.02

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 44.77 dB

ABM1 comp = -8.55 dBA/m

BWC Factor = 0.16 dB

Location: 8.7, -8.4, 3.7 mm

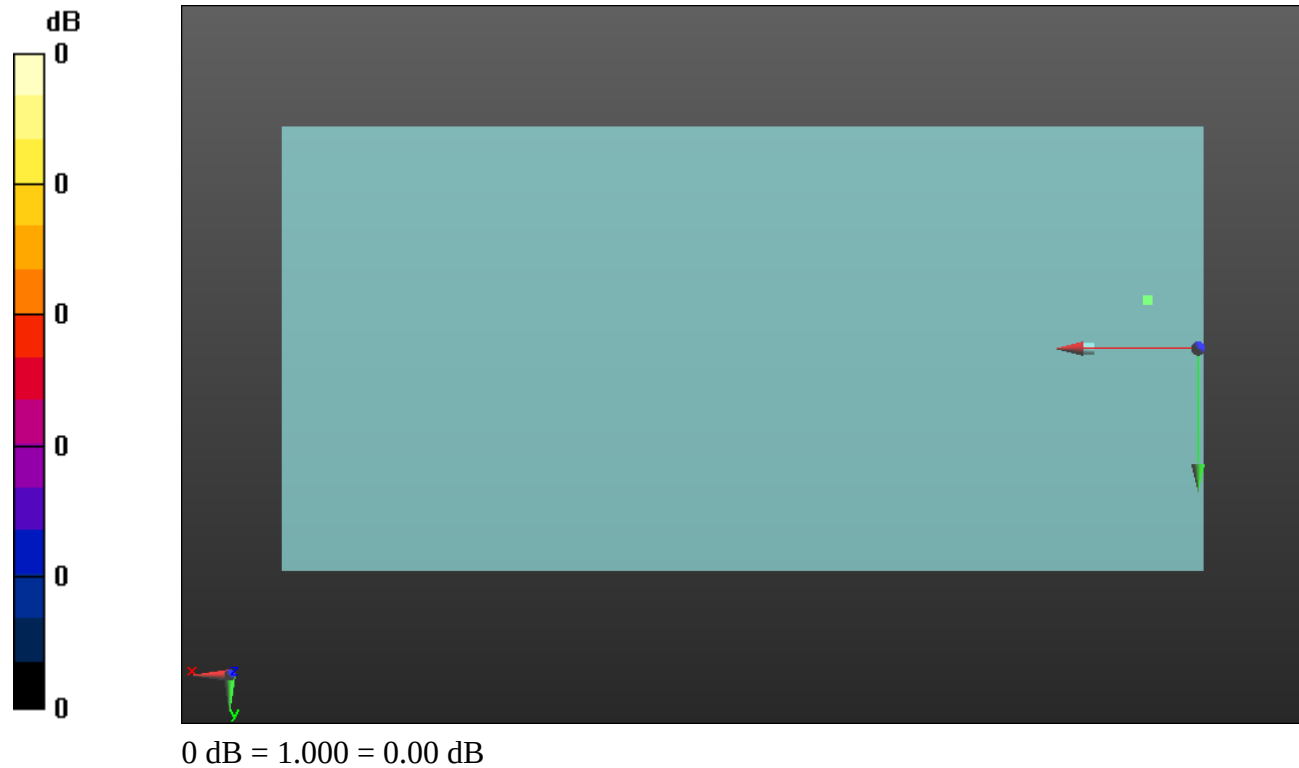



**Wi-Fi 2.4 GHz**

Communication System: UID 0, 1@IEEE 802.11b/g/n 2.4 GHz Band (0); Frequency: 2437 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11b\_20 MHz BW\_DSSS 1 Mbps\_EVS: 5.9 kbps\_Ch. 6\_ANT 4/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)**

**(1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 29.72

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.10 dB

BWC Factor = 10.80 dB

Location: 4.8, -15.2, 3.7 mm

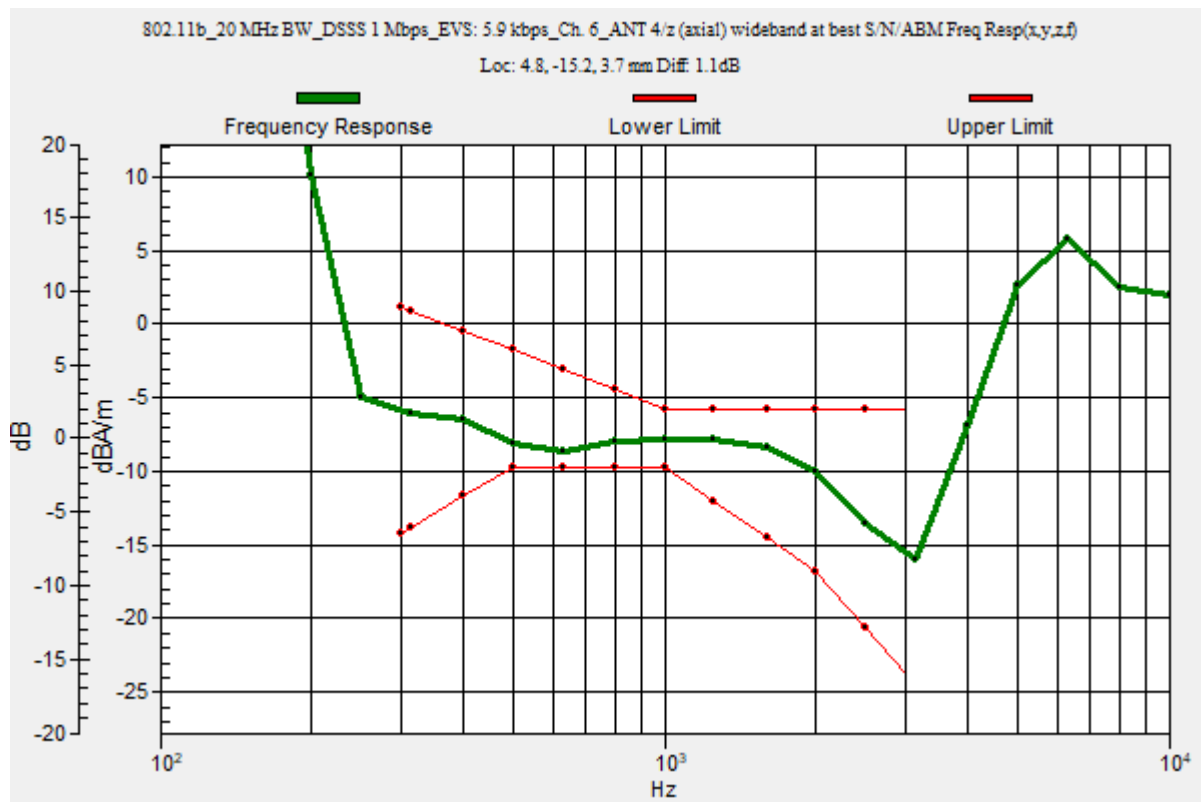

## Wi-Fi 2.4 GHz

Communication System: UID 0, 1@IEEE 802.11b/g/n 2.4 GHz Band (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/10/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 1/11/2022
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11b\_20 MHz BW\_DSSS 1 Mbps\_EVS: 5.9 kbps\_Ch. 6\_ANT 4/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


### Cursor:

ABM1/ABM2 = 33.02 dB

ABM1 comp = -9.04 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

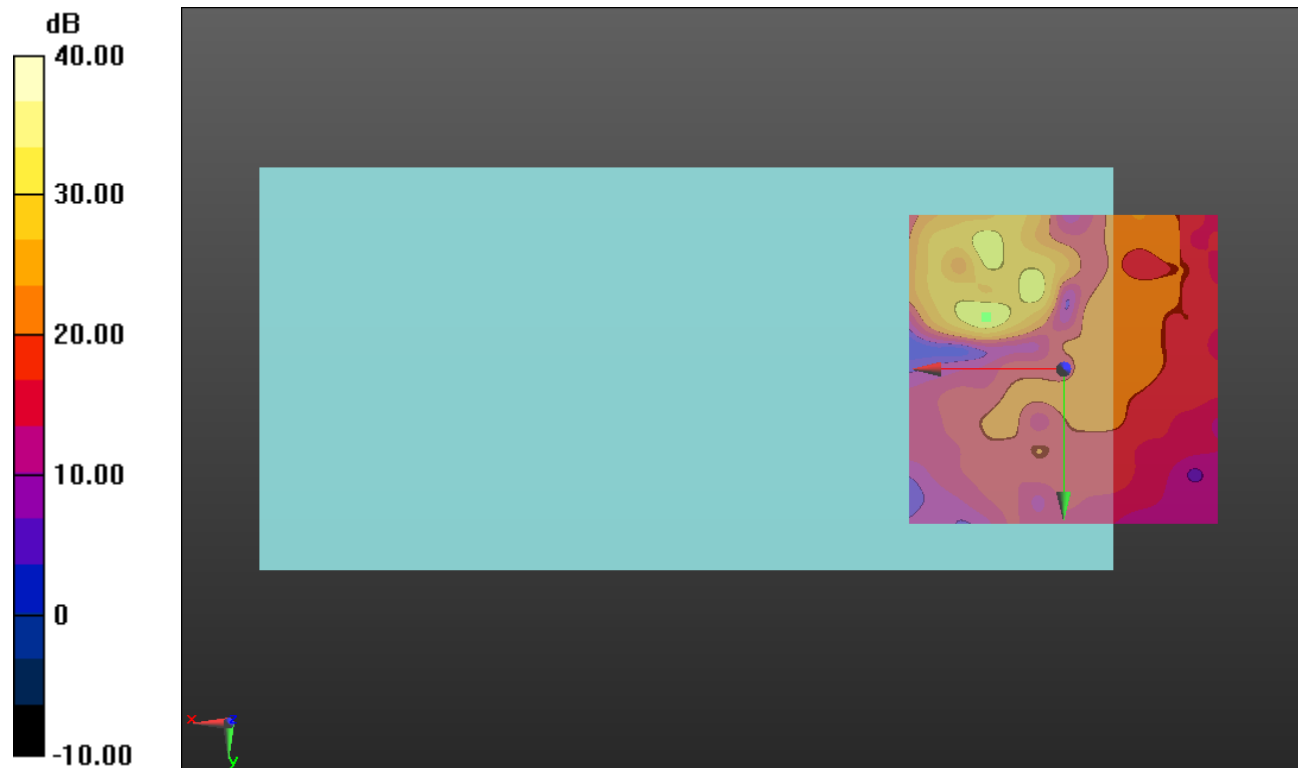

0 dB = 1.000 = 0.00 dB

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5190 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 38\_ANT 6/z (axial) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 29.78

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.26 dB

BWC Factor = 10.80 dB

Location: 9.1, -11.8, 3.7 mm

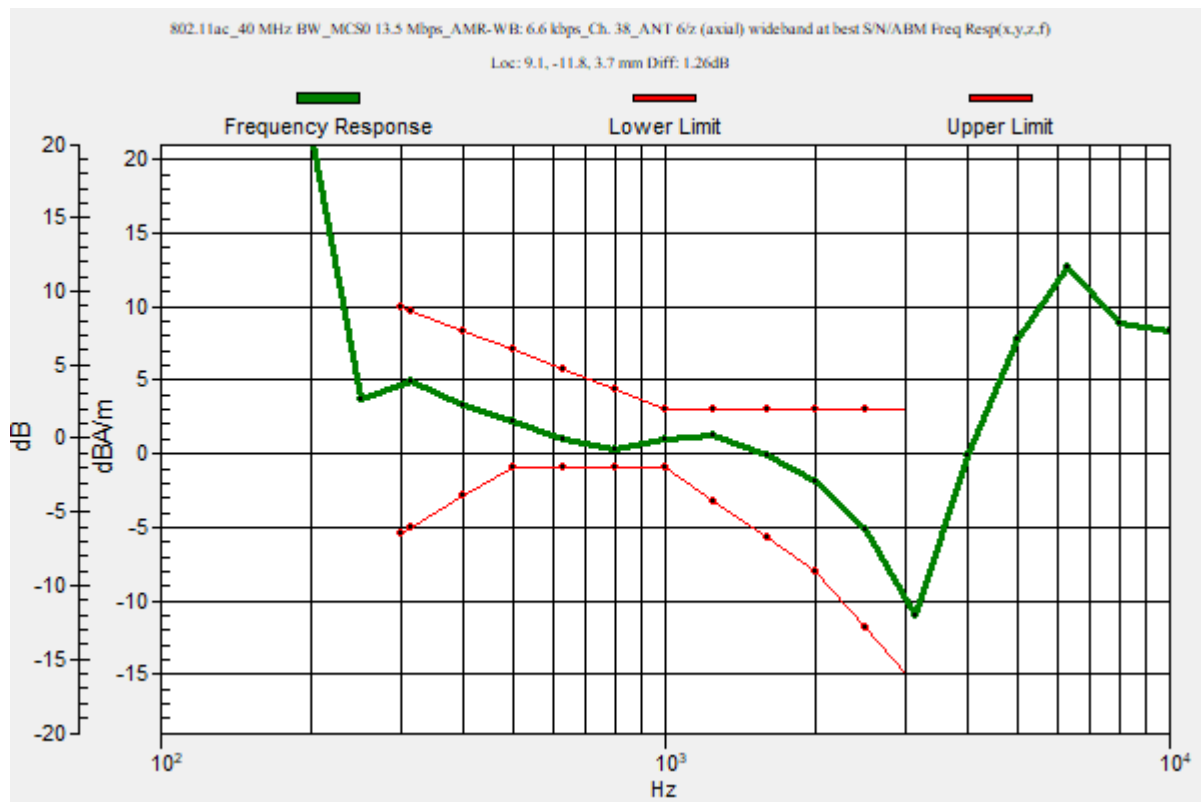

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 38\_ANT 6/z (axial) Single Point/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.19

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 35.25 dB

ABM1 comp = 0.16 dBA/m

BWC Factor = 0.16 dB

Location: 9.1, -11.8, 3.7 mm

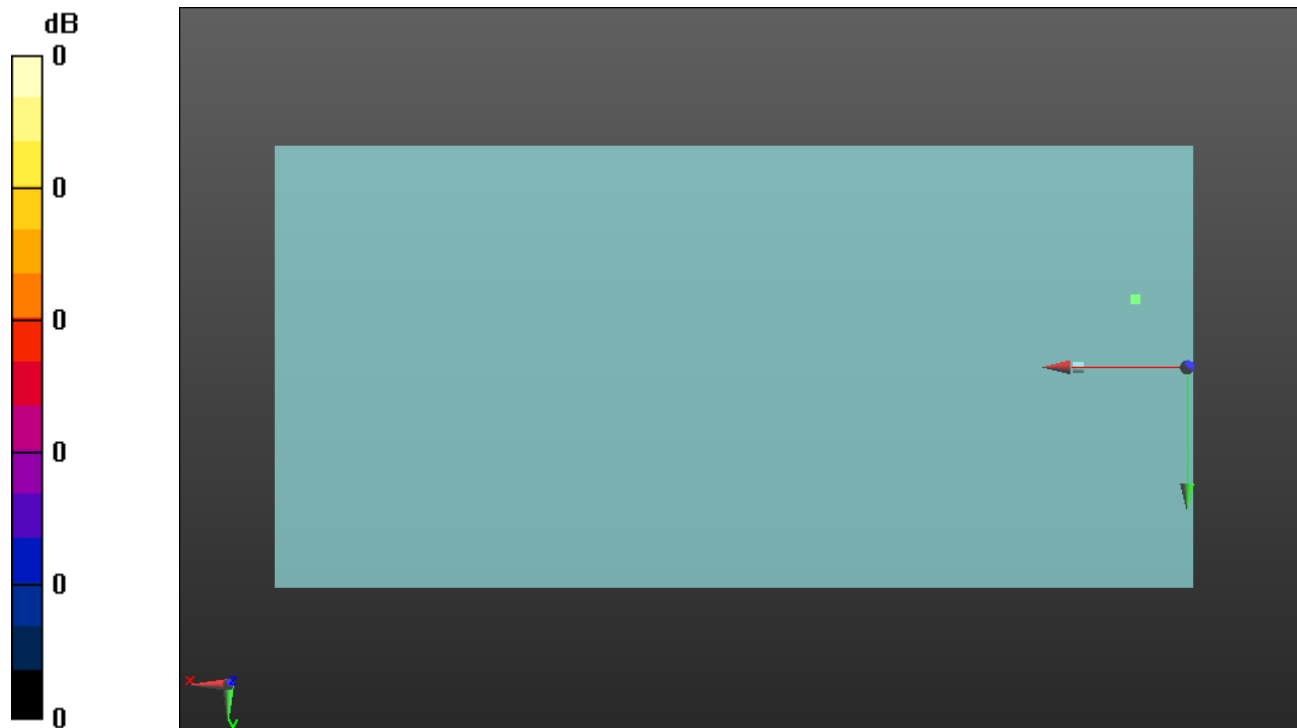

0 dB = 1.000 = 0.00 dB

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5270 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 54\_ANT 6/z (axial) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 29.78

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 0.95 dB

BWC Factor = 10.80 dB

Location: 12.2, -14.9, 3.7 mm

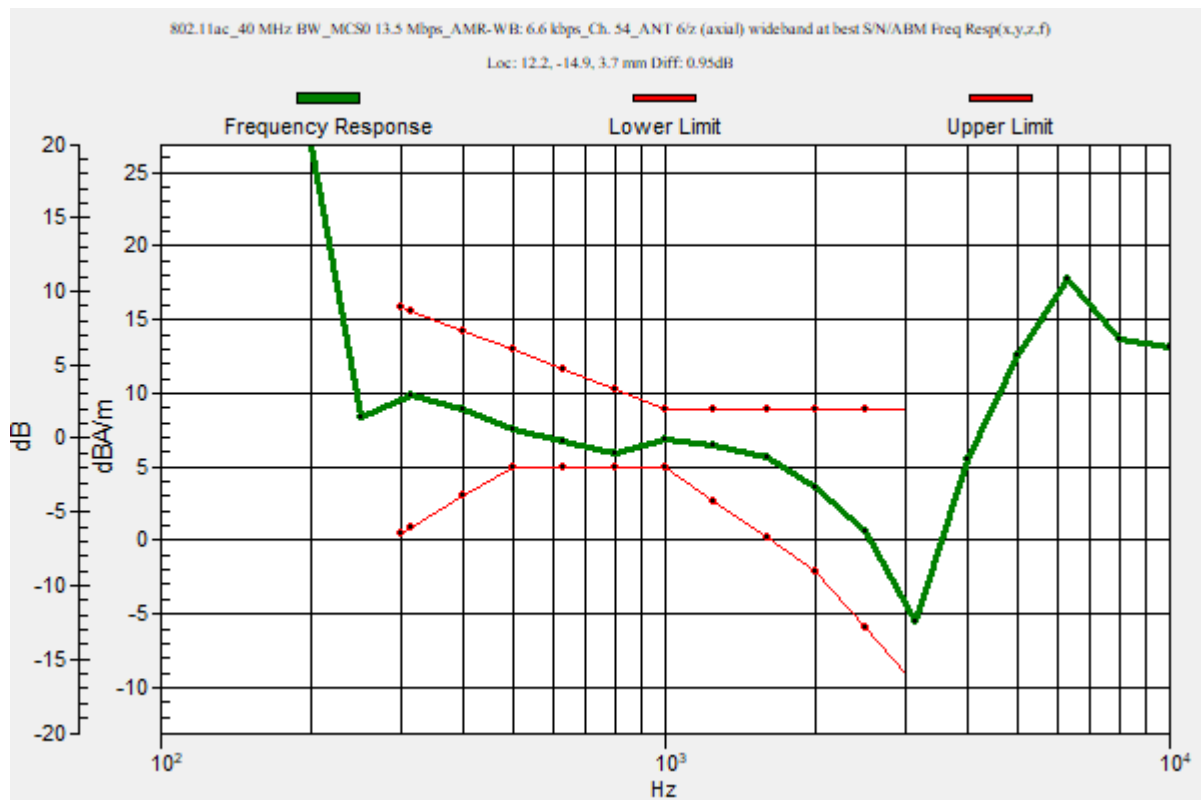

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 54\_ANT 6/z (axial) 4.2mm 50 x 50/ABM Interpolated

**SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.19

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 35.55 dB

ABM1 comp = 5.35 dBA/m

BWC Factor = 0.16 dB

Location: 12.1, -15, 3.7 mm

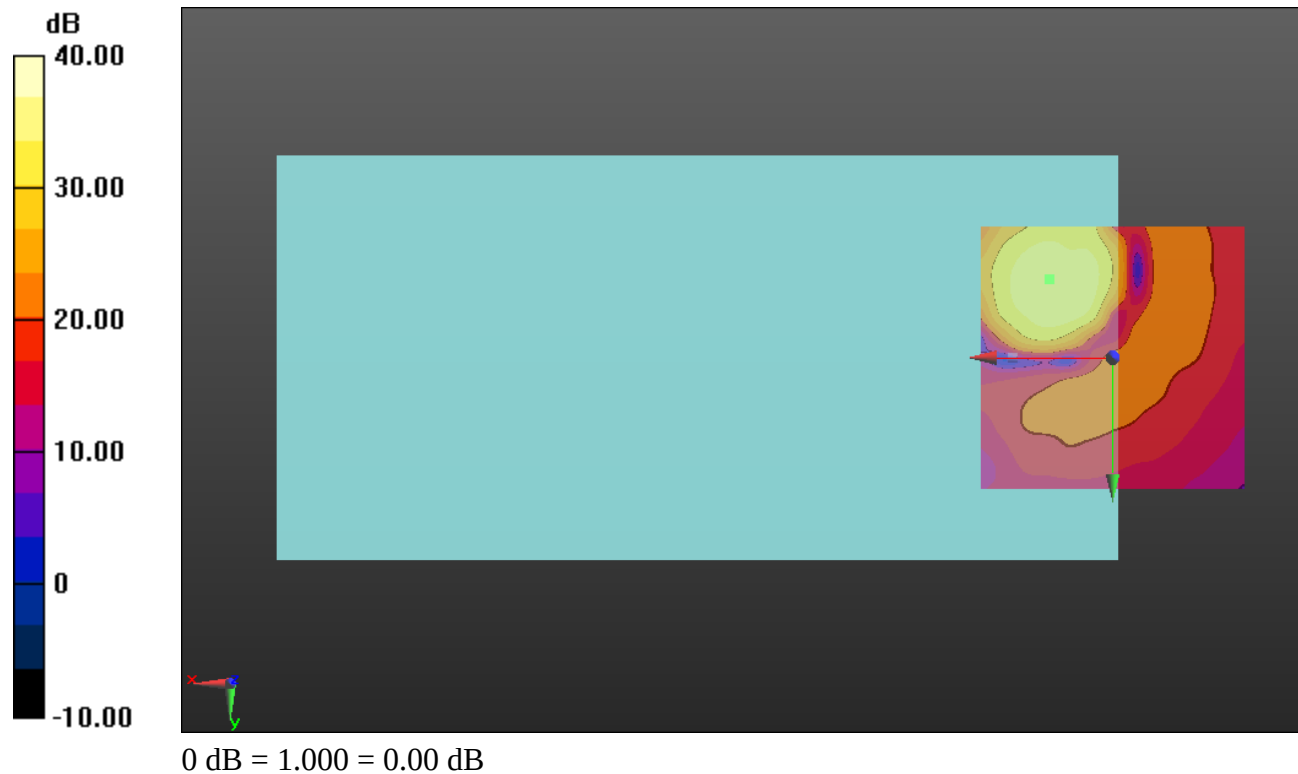

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5510 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 102\_ANT 6/z (axial) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 29.78

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.14 dB

BWC Factor = 10.80 dB

Location: 12.2, -14.9, 3.7 mm

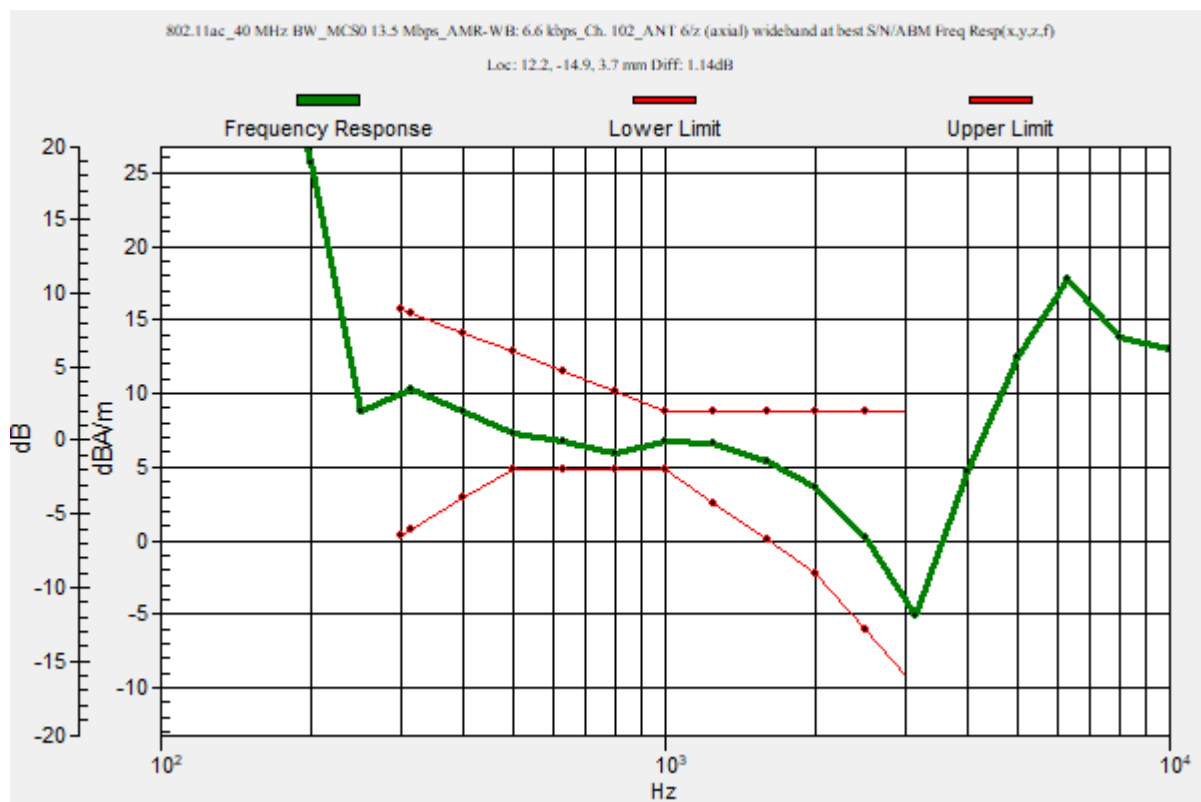

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5510 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 102\_ANT 6/z (axial) Single Point/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.19

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 35.90 dB

ABM1 comp = 5.82 dBA/m

BWC Factor = 0.16 dB

Location: 12.2, -14.9, 3.7 mm



0 dB = 1.000 = 0.00 dB



## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5755 MHz;Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 151\_ANT 6/z (axial) wideband at best S/N/ABM Freq

**Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 29.78

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.71 dB

BWC Factor = 10.80 dB

Location: 12.2, -14.9, 3.7 mm

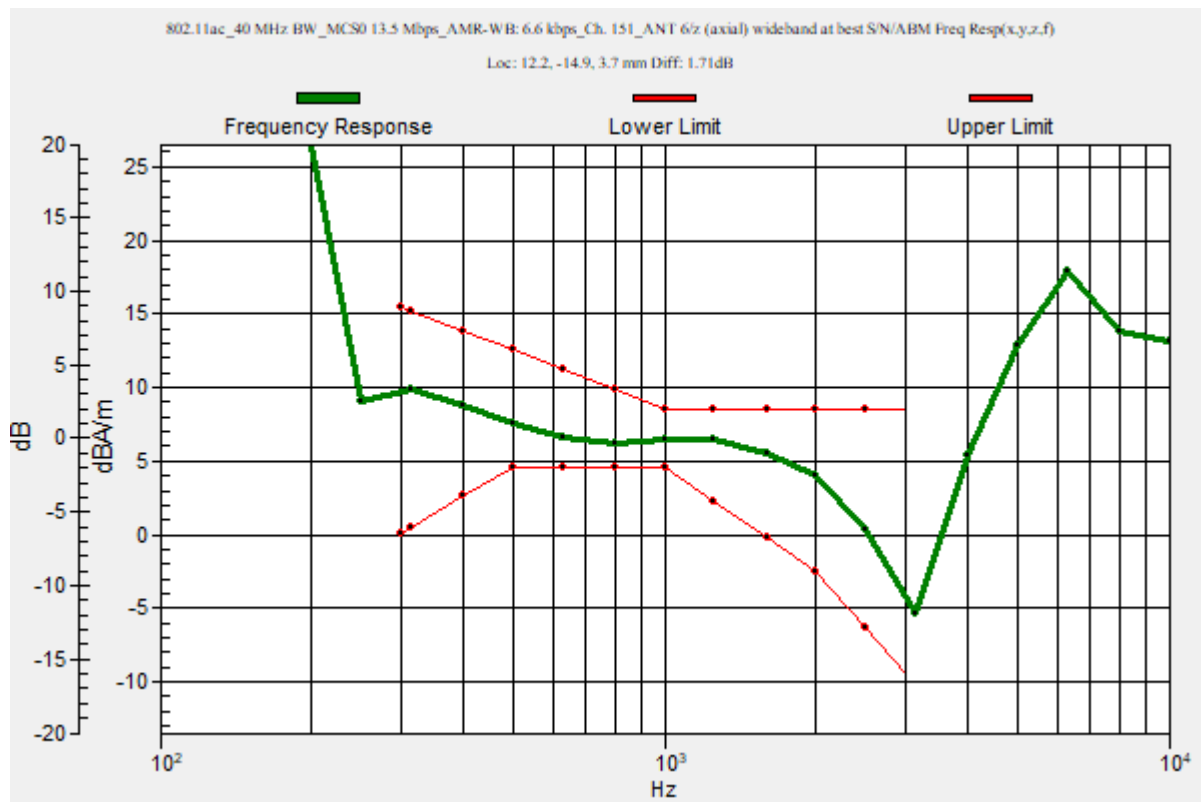

## Wi-Fi 5 GHz

Communication System: UID 0, 1@IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 4/22/2022
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1352; Calibrated: 11/9/2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11ac\_40 MHz BW\_MCS0 13.5 Mbps\_AMR-WB: 6.6 kbps\_Ch. 151\_ANT 6/z (axial) Single Point/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.19

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 35.88 dB

ABM1 comp = 5.84 dBA/m

BWC Factor = 0.16 dB

Location: 12.2, -14.9, 3.7 mm



0 dB = 1.000 = 0.00 dB