

TEST REPORT

Report Number: 14982436-E1V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S. A

Model : A3083 (Parent Model)
A3292, A3293, A3294 (Variant Models)

Brand : APPLE

FCC ID : BCG-E8666A (Parent Model)
BCG-E8667A, BCG-E8668A, BCG-E8683A
(Variant Models)

IC : 579C-E8666A (Parent Model)
579C-E8667A, 579C-E8668A, 579C-E8683A
(Variant Models)

EUT Description : SMART PHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2024/07/10

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2024/07/05	Initial Issue	Tony Li
V2	2024/07/10	Address TCB's question on section 6.3, 10	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST SUMMARY	8
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION	9
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	9
5.1. METROLOGICAL TRACEABILITY	9
5.2. DECISION RULES.....	9
5.3. MEASUREMENT UNCERTAINTY.....	10
5.4. SAMPLE CALCULATION	10
6. EQUIPMENT UNDER TEST	11
6.1. EUT DESCRIPTION	11
6.2. MAXIMUM OUTPUT POWER.....	11
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
6.4. SOFTWARE AND FIRMWARE.....	12
6.5. WORST-CASE CONFIGURATION AND MODE.....	13
6.6. DESCRIPTION OF TEST SETUP.....	14
7. TEST AND MEASUREMENT EQUIPMENT	17
8. MEASUREMENT METHODS	19
9. ANTENNA PORT TEST RESULTS	20
9.1. ON TIME AND DUTY CYCLE.....	20
9.2. 20 dB AND 99% BANDWIDTH	22
9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	23
9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	24
9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	25
9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	26
9.3. HOPPING FREQUENCY SEPARATION	27
9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	28
9.4. NUMBER OF HOPPING CHANNELS.....	29
9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	30
9.5. AVERAGE TIME OF OCCUPANCY.....	32
9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	33
9.6. OUTPUT POWER.....	37
9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	39
9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	39
9.6.3. HIGH POWER ENHANCED DATA RATE DQPSK MODULATION.....	40

9.6.4.	HIGH POWER ENHANCED DATA RATE TXBF DQPSK MODULATION	40
9.6.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	41
9.6.6.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	41
9.6.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	42
9.6.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	42
9.6.9.	LOW POWER ENHANCED DATA RATE DQPSK MODULATION.....	43
9.6.10.	LOW POWER ENHANCED DATA RATE TXBF DQPSK MODULATION	43
9.6.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	44
9.6.12.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	44
9.7.	AVERAGE POWER.....	45
9.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	46
9.7.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	46
9.7.3.	HIGH POWER ENHANCED DATA RATE DQPSK MODULATION.....	47
9.7.4.	HIGH POWER BASIC DATA RATE TXBF DQPSK MODULATION	47
9.7.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	48
9.7.6.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION	48
9.7.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	49
9.7.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	49
9.7.9.	LOW POWER ENHANCED DATA RATE DQPSK MODULATION.....	50
9.7.10.	LOW POWER BASIC DATA RATE TXBF DQPSK MODULATION	50
9.7.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	51
9.7.12.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION.....	51
9.8.	CONDUCTED SPURIOUS EMISSIONS.....	52
9.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	53
9.8.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	57
9.8.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	61
9.8.4.	HIGH POWER TXBF ENHANCED DATA RATE 8PSK MODULATION	65
9.8.5.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	69
9.8.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	73
9.8.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	77
9.8.8.	LOW POWER TXBF ENHANCED DATA RATE 8PSK MODULATION.....	81
10.	RADIATED TEST RESULTS	85
10.1.	TRANSMITTER ABOVE 1 GHz.....	87
10.1.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	87
10.1.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION	95
10.1.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	99
10.1.4.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION.....	107
10.1.5.	LOW POWER BASIC DATA RATE GFSK MODULATION	111
10.1.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION	119
10.1.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	123
10.1.8.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION.....	131
10.1.9.	WORST CASE HARMONICS AND SPURIOUS EMISSIONS	135
10.2.	WORST CASE BELOW 1 GHZ.....	141
10.3.	WORST CASE 18-26 GHZ.....	143
11.	AC POWER LINE CONDUCTED EMISSIONS	145
11.1.	AC Power Line With AC/DC Adapter.....	146
11.2.	AC Power Line with Laptop	148

12. SETUP PHOTOS	150
----------------------------------	------------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMART PHONE

MODEL: A3083 (Parent Model)
A3292, A3293, A3294 (Variant Models)

BRAND: APPLE

SERIAL NUMBER: C07GYF0008T0000FDV, C07H4F0015B0000FDT,
C1JQP79DFT, LWQC2DNVTW.

SAMPLE RECEIPT DATE: 2023/12/19.

DATE TESTED: 2023/12/20 – 2024/07/10.

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 3	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Frank Ibrahim
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Lead Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 11.6.
See Comment	RSS-GEN 6.7	20dB BW/99% OBW	Reporting purposes only	ANSI C63.10 Sections 6.9.2 and 6.9.3
15.247 (a)(1)	RSS-247 (5.1) (b)	Hopping Frequency Separation	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Number of Hopping Channels	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Average Time of Occupancy	Complies	None.
15.247 (b)(1)	RSS-247 (5.4) (b)	Output Power	Complies	None.
See Comment		Average Power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (d)	RSS-247 (5.5)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 3.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not considered when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 (Peak), 1.3 (Ave)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Carrier Frequency Separation	19.70Hz
Number of Hopping Frequencies	0.000dB
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2402 - 2480	Basic GFSK	20.15	103.51
		2402 - 2480	DQPSK	18.82	76.21
		2402 - 2480	Enhanced 8PSK	19.05	80.35
	Low Power	2402 - 2480	Basic GFSK	11.64	14.59
		2402 - 2480	DQPSK	9.39	8.69
		2402 - 2480	Enhanced 8PSK	9.51	8.93
ANT 3	High Power	2402 - 2480	Basic GFSK	20.12	102.80
		2402 - 2480	DQPSK	18.85	76.74
		2402 - 2480	Enhanced 8PSK	19.00	79.43
	Low Power	2402 - 2480	Basic GFSK	11.10	12.88
		2402 - 2480	DQPSK	9.40	8.71
		2402 - 2480	Enhanced 8PSK	9.47	8.85
BF, ANT 4 + ANT 3	High Power	2402 - 2480	Basic GFSK TxBF	20.14	103.28
		2402 - 2480	DQPSK TxBF	18.69	73.96
		2402 - 2480	Enhanced 8PSK TxBF	18.95	78.52
	Low Power	2402 - 2480	Basic GFSK TxBF	14.35	27.23
		2402 - 2480	DQPSK TxBF	12.24	16.75
		2402 - 2480	Enhanced 8PSK TxBF	12.45	17.58

Note: GFSK, DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on these modes to show compliance.

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) type is IFA type.

The antenna(s) gains, as provided by the manufacturer, are as follows:

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	0.0	-2.1

SMA Cable used for RF conducted testing has a loss as follows:

Cable Loss used for Antenna 4 is 2.1 dB

Cable Loss used for Antenna 3 is 2.15 dB

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware and Software version installed during testing was 22.1.76.242

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and TXBF, it was determined that X (Flatbed) was the worst-case orientation for ANT 4, ANT 3 and 2TX Beamforming.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 30MHz, 30-1000MHz emissions spurious tests EUT was connected to AC power adapter and set at X orientation as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, No noticeable emission was found.

GFSK, DQPSK, 8PSK average power are all investigated, The GFSK & 8PSK power are the worst case. For average power data please refer to section 9.7.

Worst-case data rates as provided by the client were:

GFSK mode : DH5

8PSK mode : 3-DH5

Beamforming: GFSK, DH5, 8PSK, 3-DH5



For radiated harmonic spurious emissions test, high power beamforming GFSK mode is set to maximum power per chain to cover both SISO and MIMO modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel.



6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number	FCC ID/ DoC	
Laptop		Apple	Macbook Pro	C02VD7SAHV22	BCGA1708	
Laptop AC/DC adapter		Liteon Technology	A1424	NSW25679	DoC	
EUT AC/DC adapter		Apple	A1720	C3D8417A7R93KVPA8	DoC	
Conducted Switch Box		UL	n/a	208281	N/A	
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.75	To spectrum Analyzer
2	Antenna	2	SMA	Un-shielded	0.2	To Conducted Switch Box
3	USB-C	1	USB-C	Shielded	1.0	N/A
4	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

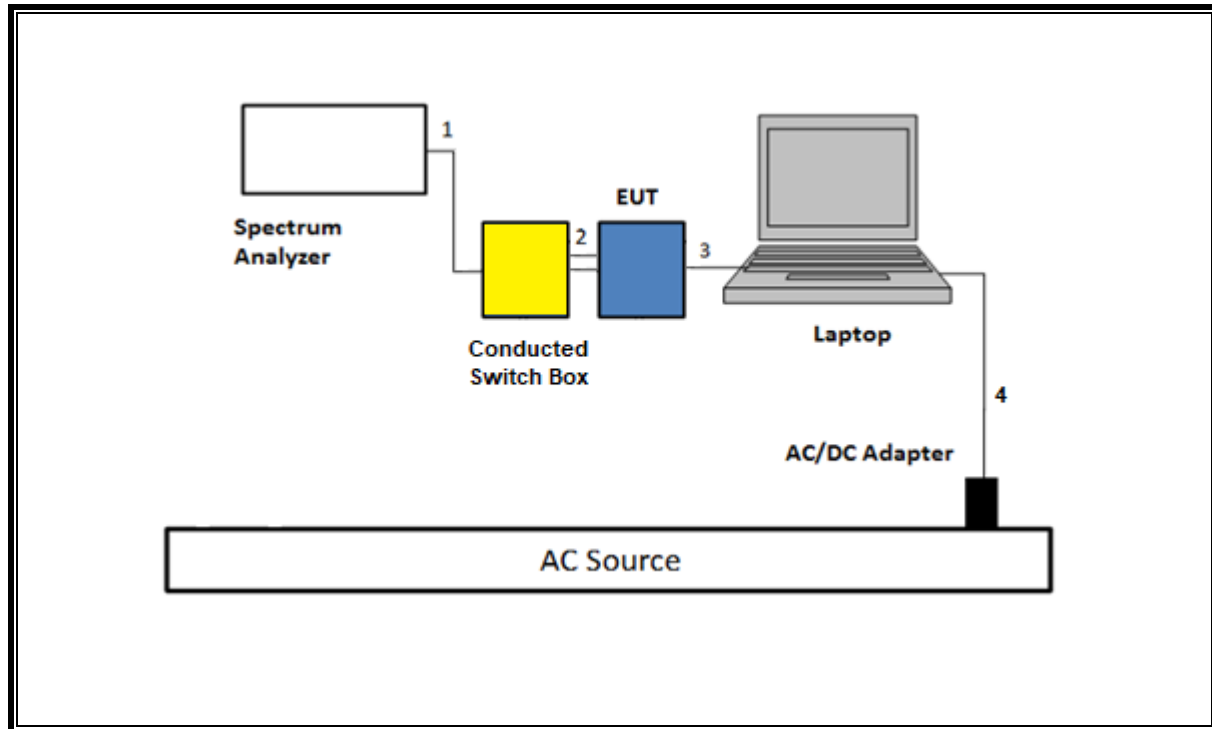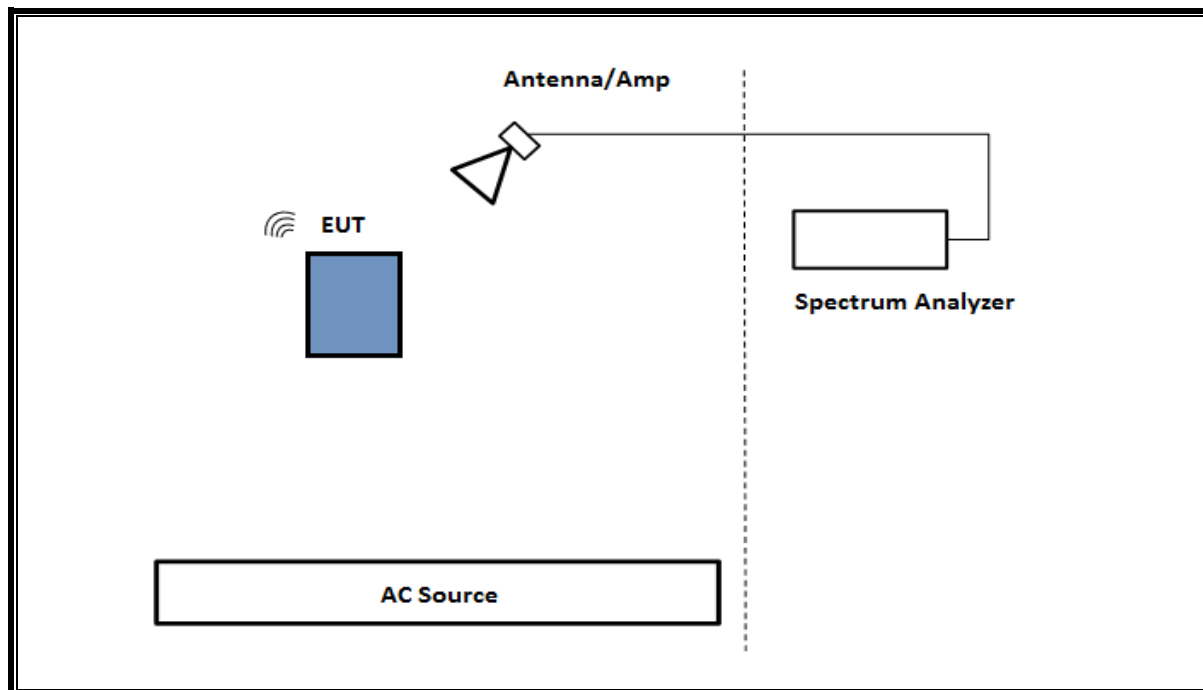SETUP DIAGRAM FOR CONDUCTED TESTS**SETUP DIAGRAM FOR RADIATED EMISSIONS 1 GHz - 26 GHz**

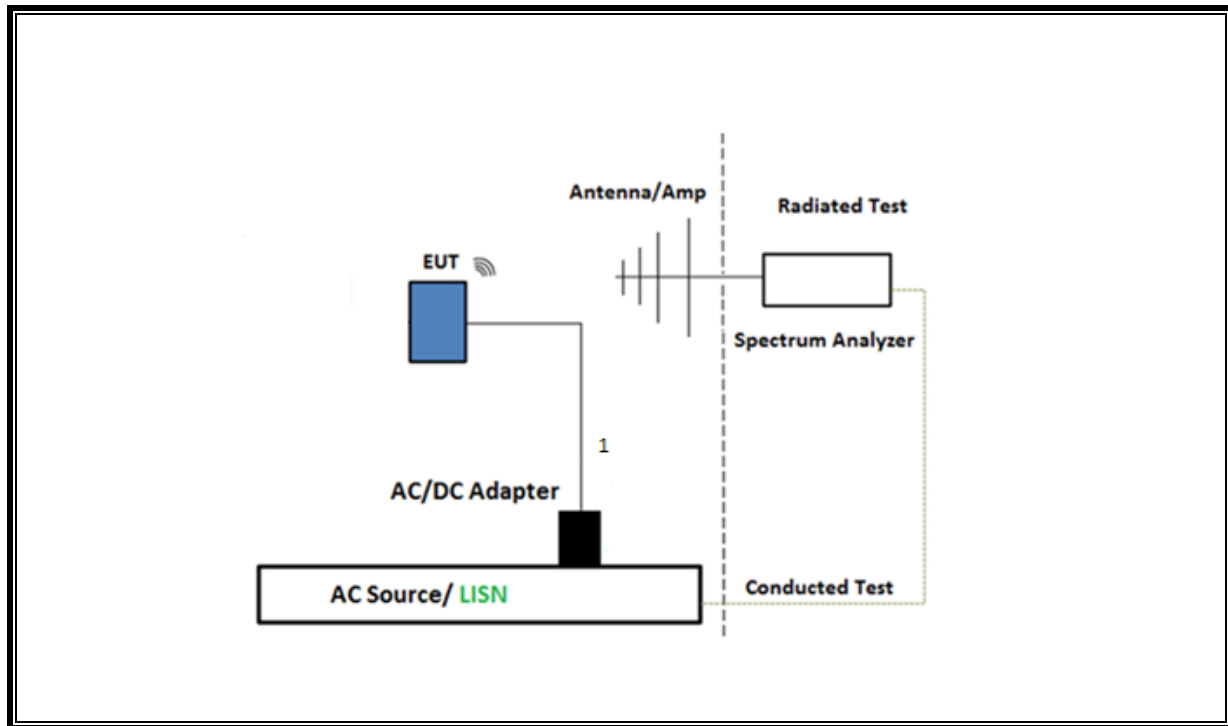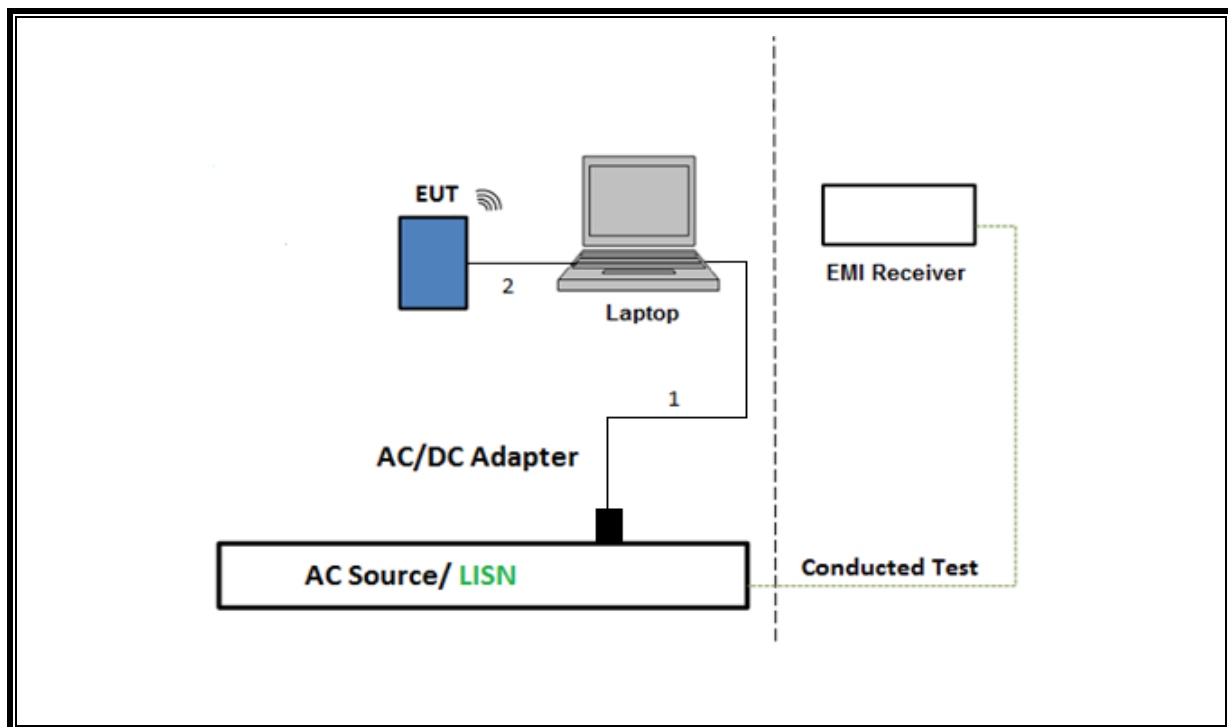SETUP DIAGRAM FOR RADIATED EMISSIONS 30 MHz - 1GHz and AC LINE CONDUCTED TEST**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
*Antenna, Horn 1-18GHz	ETS-Lindgren	3117	206808	2024/03/31	2023/03/31
*RF Filter Box, 1-18GHz	UL-FR1	NA	PRE0183207	2024/03/31	2023/03/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223461	2024/08/29	2023/08/29
Antenna, Broadband Hybrid 30 MHz - 3 GHz	SUNOL SCIENCES CORP.	JB3	230634	2025/01/31	2024/01/31
Link File, @3m, 9kHz-1000MHz Hybrid Path Loss	UL-FR1	Port 0 Factors	232001	2025/02/28	2024/02/28
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	81139	2024/08/31	2023/08/31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	81887	2025/03/31	2024/03/31
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	215705	2024/11/30	2023/11/30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201500	2025/02/28	2024/02/28
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	224478	2025/01/31	2024/01/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201501	2024/11/30	2023/11/30
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200784	2025/01/31	2024/01/31
EMI Test Receiver	Rohde & Schwarz	ESW44	223461	2025/02/28	2024/02/28
RF Filter Box, 1-18GHz, 12 Ports	UL-FR1	Frankenstein	231874	2024/08/31	2023/08/31
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170013	2024/07/31	2023/07/31
Antenna, Passive Loop 100kHz to 30MHz	ELECTRO-METRICS	EM-6872	170015	2024/07/31	2023/07/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90731	2025/01/31	2024/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	80120	2025/01/31	2024/01/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90719	2025/01/31	2024/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2025/01/31	2024/01/31
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	178557	Verified Before Use	
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	178558	Verified Before Use	
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	80397	2025/01/31	2024/01/31
Spectrum Analyzer, PXA, 3Hz to 50GHz w/Ext. Mixer	Keysight Technologies Inc	N9030A	80400	2025/02/02	2024/02/02
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	125178	2025/01/31	2024/01/31
*Conducted Switch Box	N/A	CSB	208281	2024/04/30	2023/04/30
Conducted Switch Box	N/A	CSB	208281	2025/05/08	2024/05/08

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	93091	2025/02/28	2024/02/28
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN- 50/250-25-2-01- 480V	175765	2025/01/31	2024/01/31
Transient Limiter	TE	TBFL1	207996	2024/08/31	2023/08/31
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023		
Conducted Software	UL	UL EMC	2023.2.23		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Mar 3, 2023		

*Testing was completed before equipment calibration date

8. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

&

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3, 6.5 & 13

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3, 6.6 & 13

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5 & 13

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


ANSI C63.10, Section 11.6: Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	0.04	0.04	1.000	100.0%	0.00	0.010
Bluetooth 8PSK	2005.00	2005.00	1.000	100.0%	0.00	0.010

Note: Both 1TX and 2TX have the same DCCF.

DUTY CYCLE PLOTS

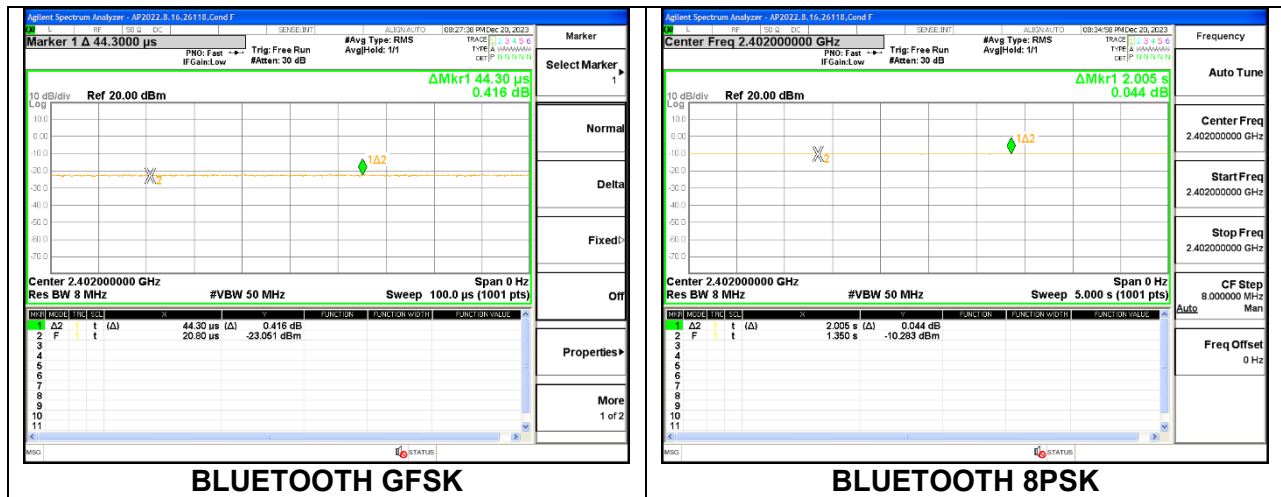

9.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq 3 \times \text{RBW}$. The sweep time is coupled.

RESULTS


Only High-Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

.

9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.89120	0.88156
Mid	2441	0.92690	0.87992
High	2480	0.89080	0.88001

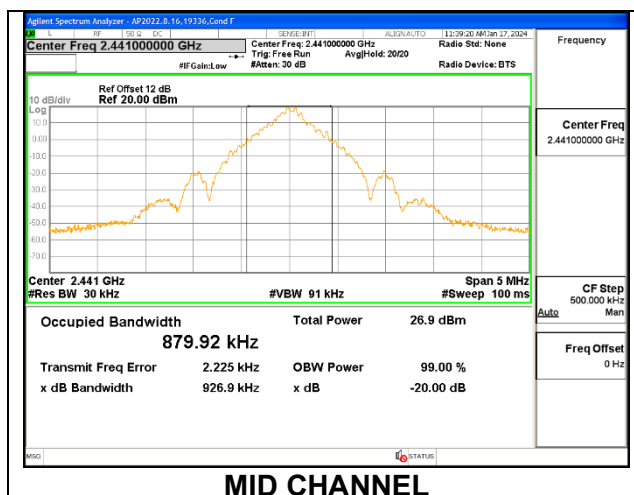

ANT 3


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.92440	0.88264
Mid	2441	0.92970	0.87890
High	2480	0.89130	0.87943

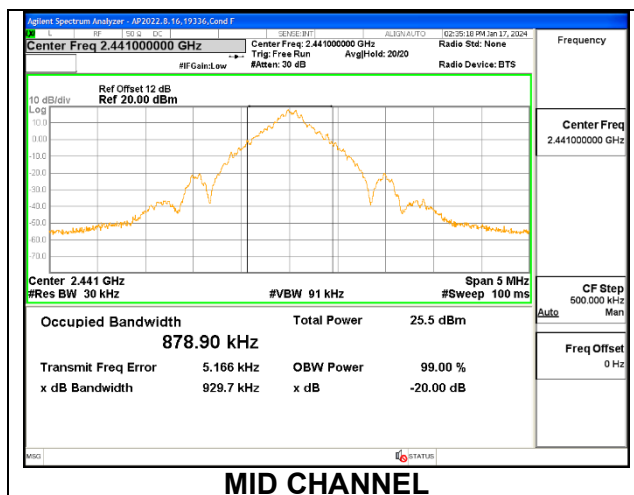

9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	0.92190	0.92150	0.88142	0.88140
Mid	2441	0.89180	0.89300	0.88099	0.87959
High	2480	0.92840	0.89020	0.88077	0.87851


Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

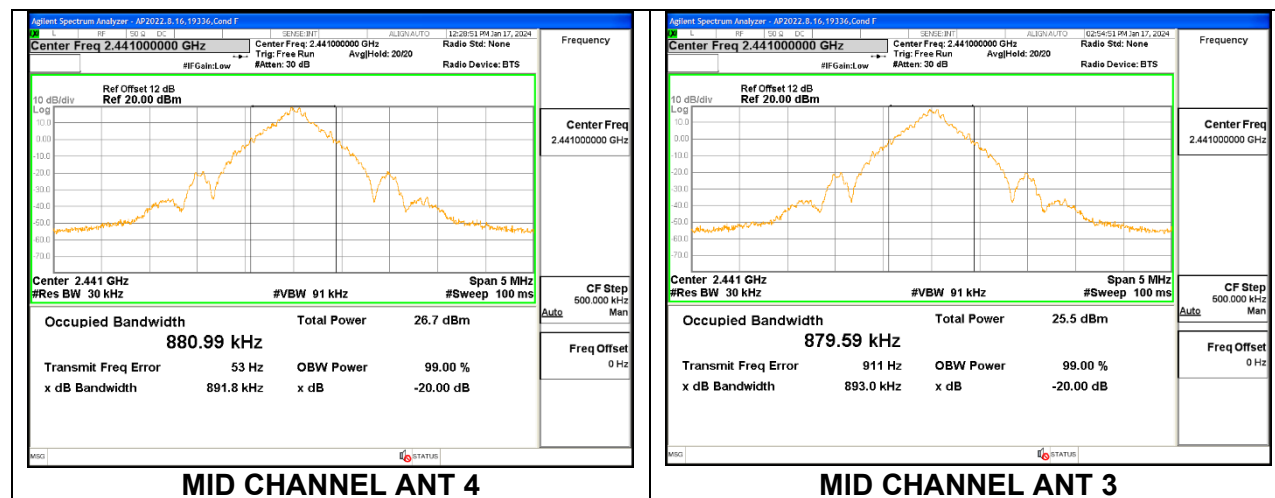

9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


ANT 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.3780	1.2224
Mid	2441	1.3760	1.2231
High	2480	1.3780	1.2219

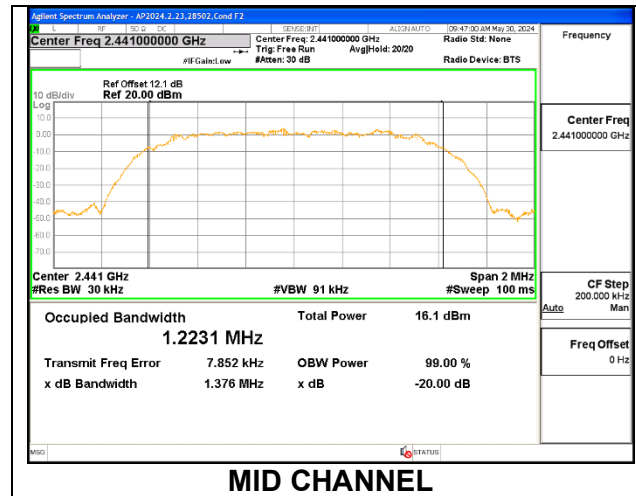


ANT 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.3800	1.2237
Mid	2441	1.3790	1.2248
High	2480	1.3780	1.2217

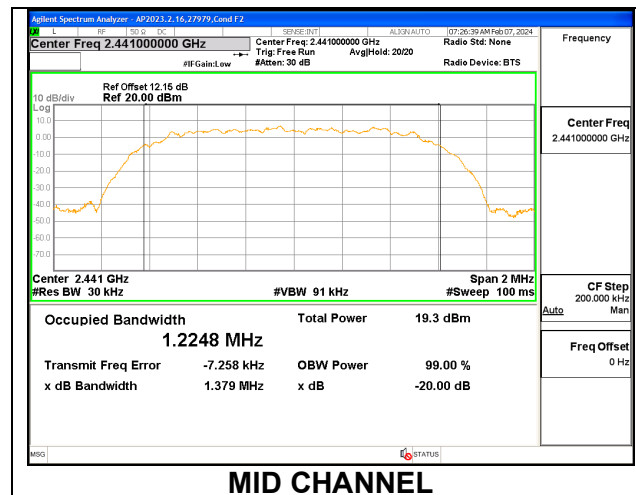

9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	1.3800	1.3770	1.2238	1.2223
Mid	2441	1.3780	1.3800	1.2244	1.2239
High	2480	1.3780	1.3780	1.2223	1.2220

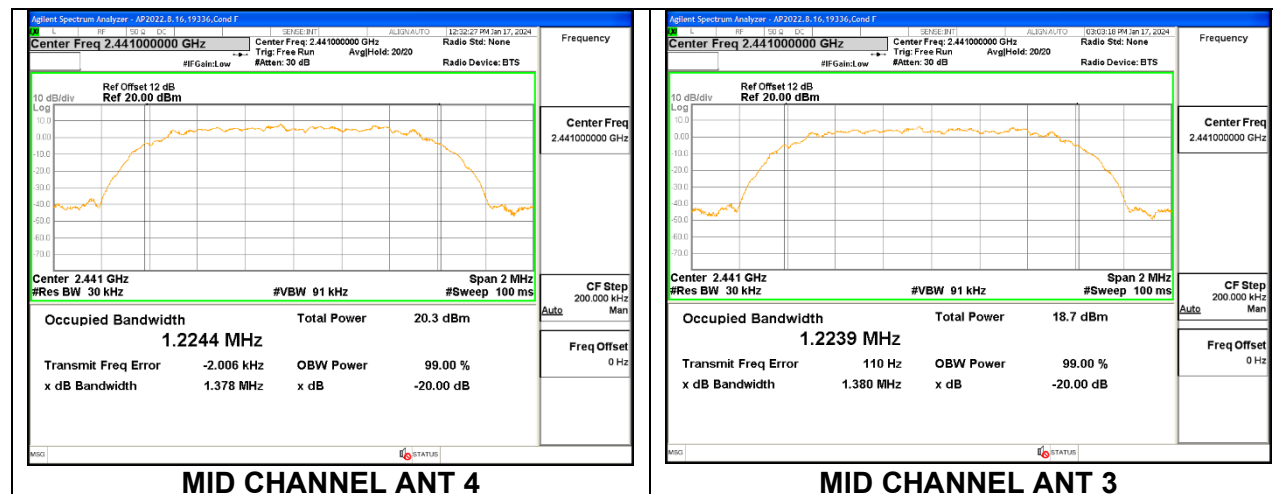

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq 3 \times RBW$. The sweep time is coupled.

RESULTS

Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exactly same channel plan.

9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

HOPPING FREQUENCY SEPARATION

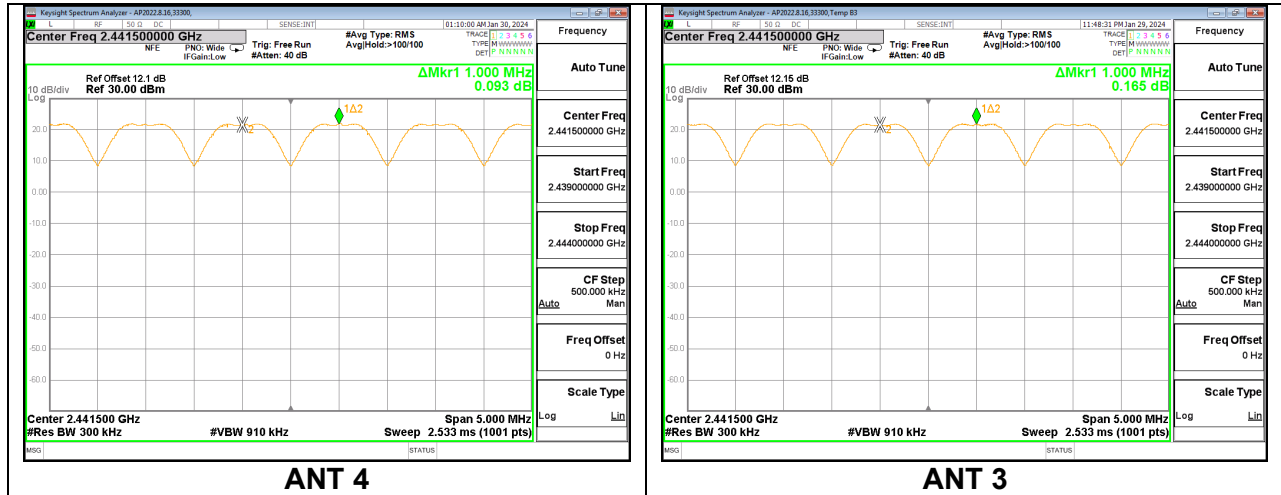

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels Observed. Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exactly same channel plan.

9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

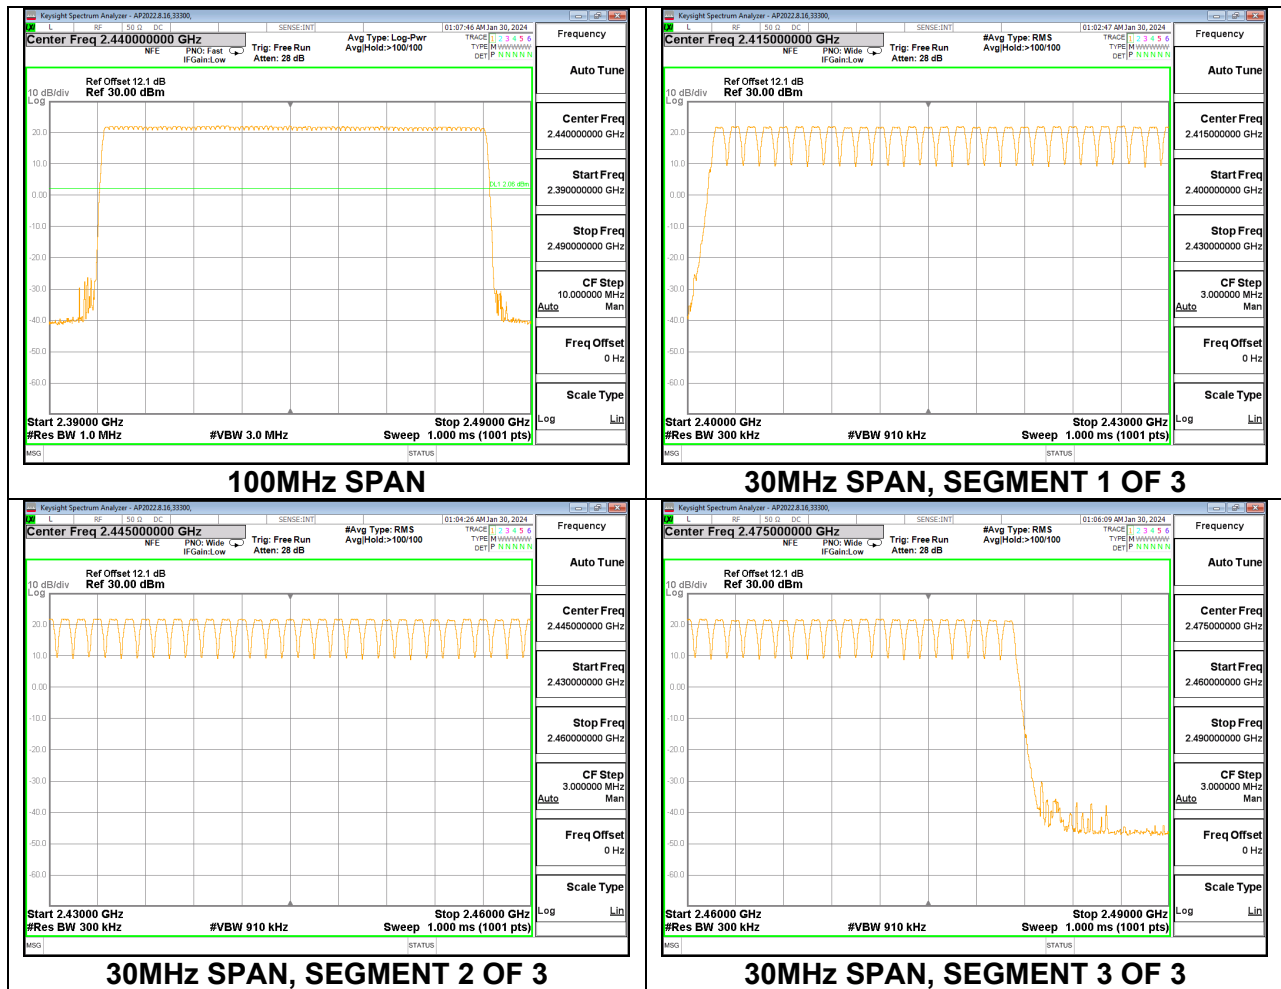

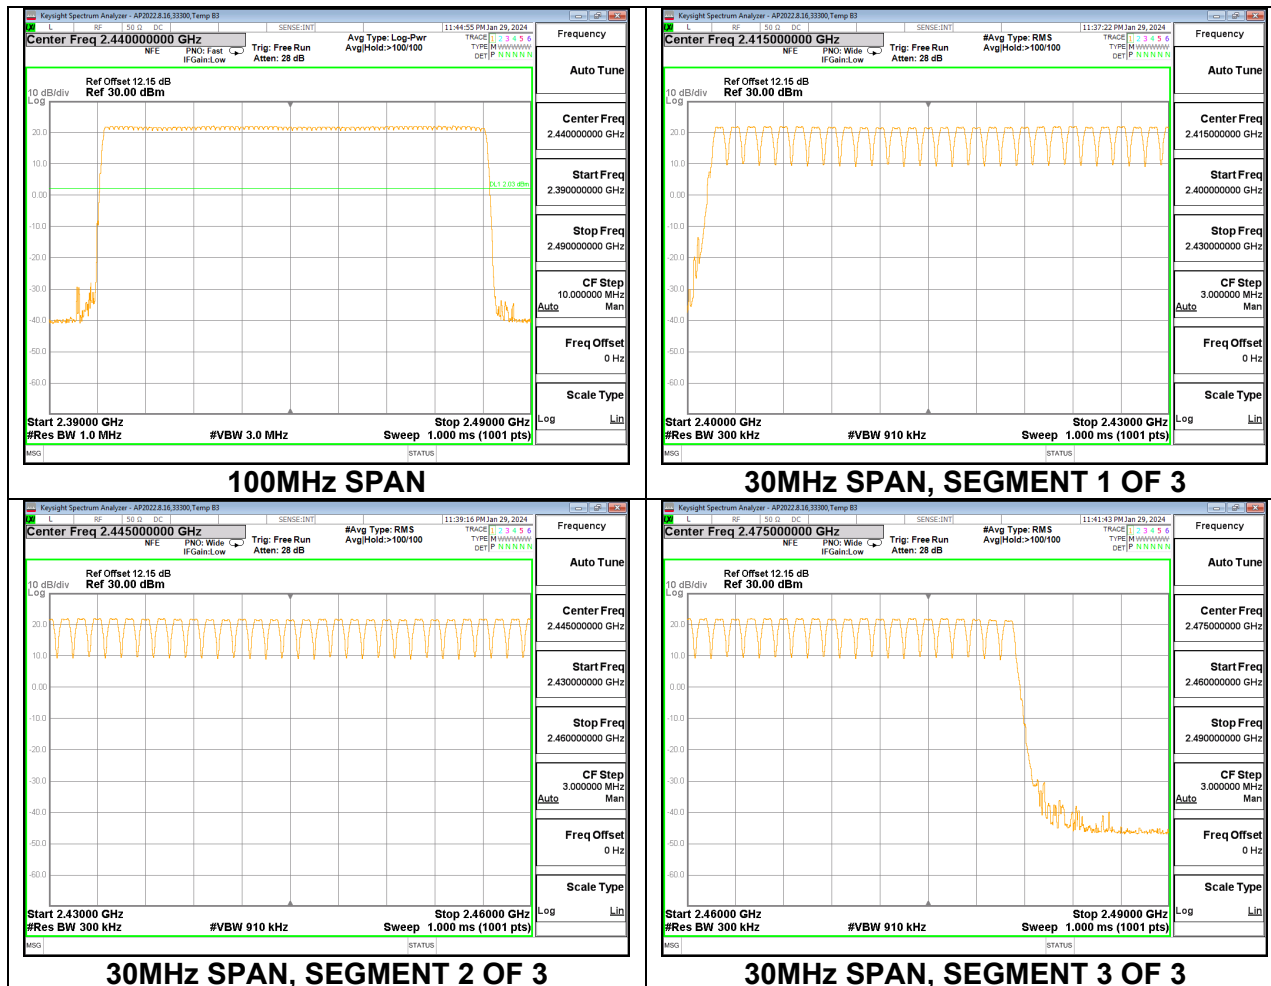ANT 3

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS



Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same timing.

9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION**ANT 4**



DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	32	0.121	0.4	-0.279
DH3	1.632	15	0.245	0.4	-0.155
DH5	2.876	10	0.288	0.4	-0.112
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	8	0.030	0.4	-0.370
DH3	1.632	3.75	0.061	0.4	-0.339
DH5	2.876	2.5	0.072	0.4	-0.328

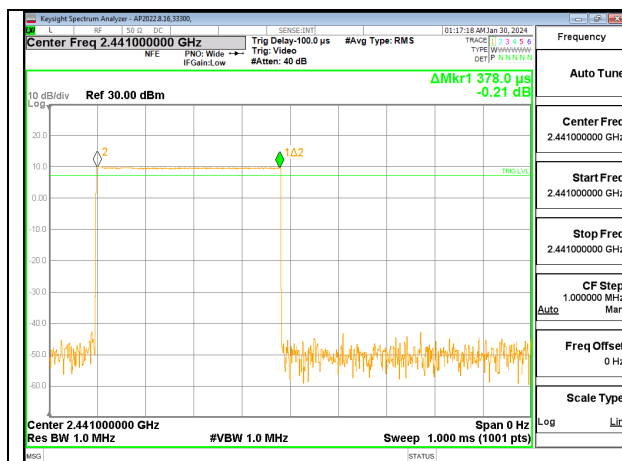


PULSE WIDTH – DH1

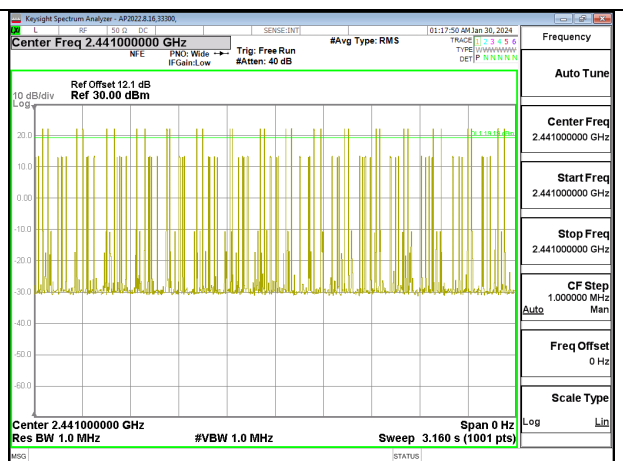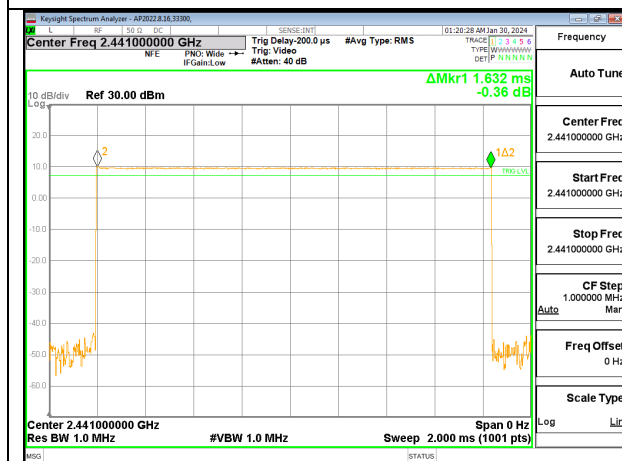NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1

PULSE WIDTH – DH3





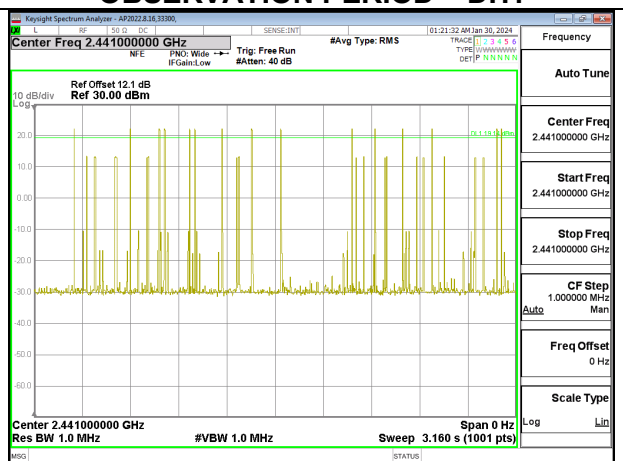
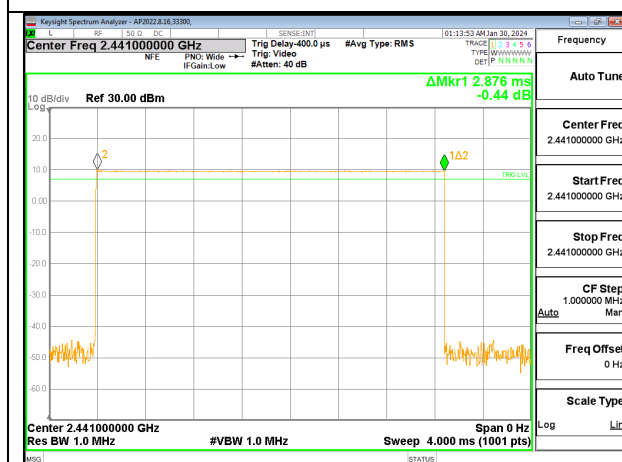
NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3

PULSE WIDTH – DH5

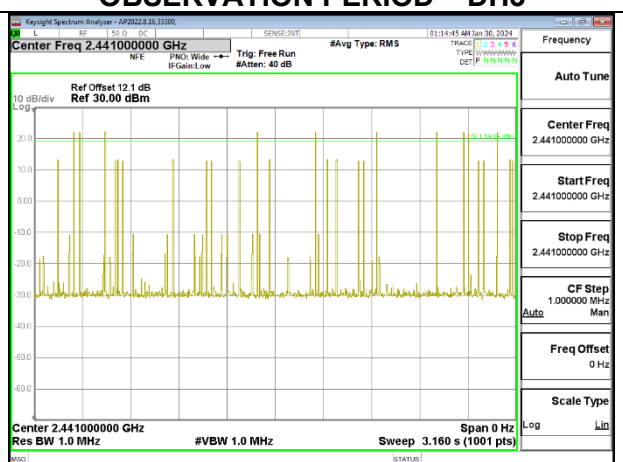NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5

ANT 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	32	0.121	0.4	-0.279
DH3	1.632	15	0.245	0.4	-0.155
DH5	2.876	11	0.316	0.4	-0.084
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	8	0.030	0.4	-0.370
DH3	1.632	3.75	0.061	0.4	-0.339
DH5	2.876	2.75	0.079	0.4	-0.321

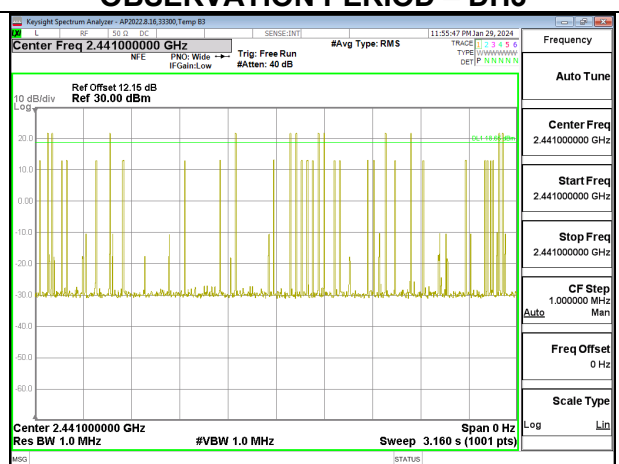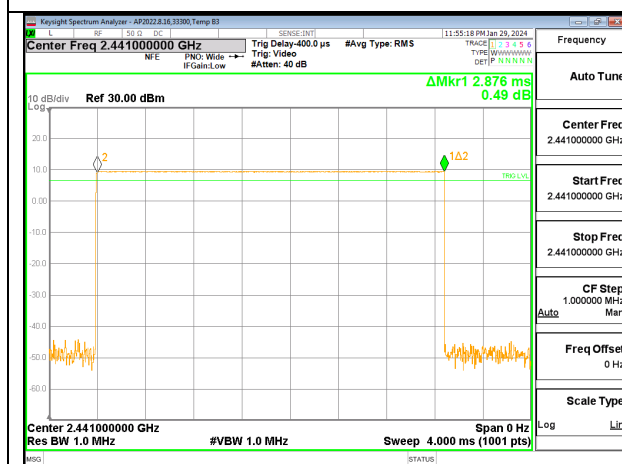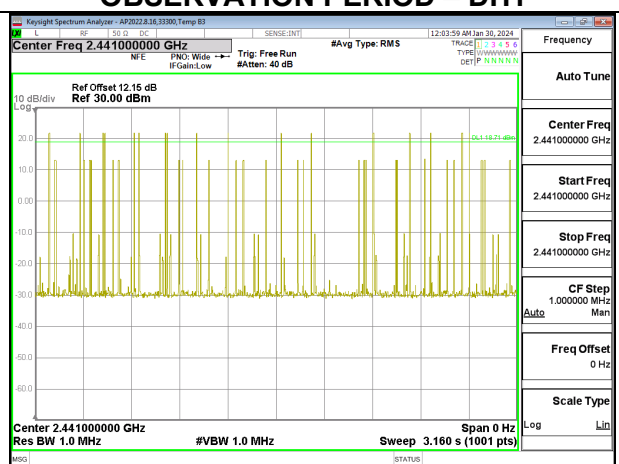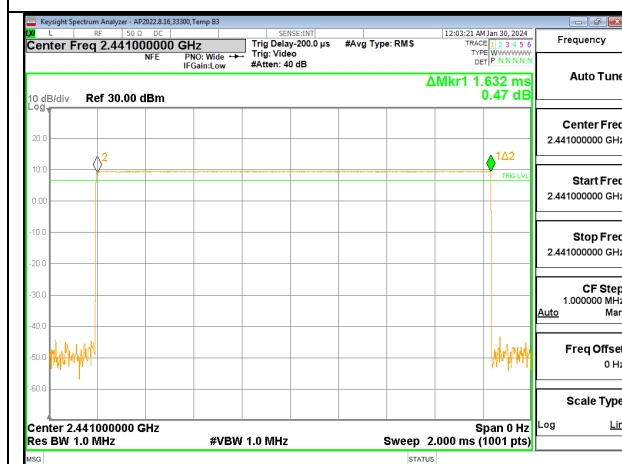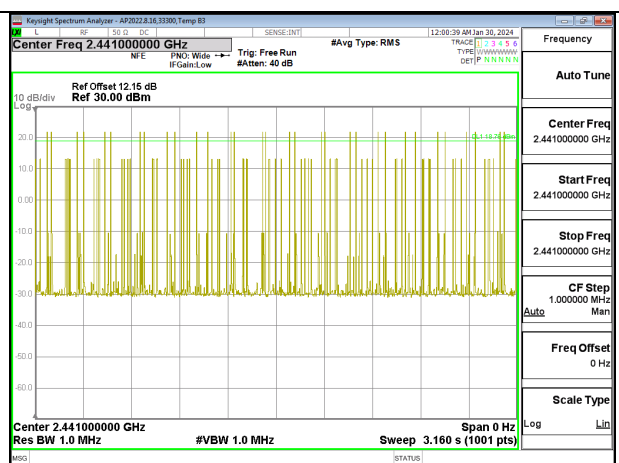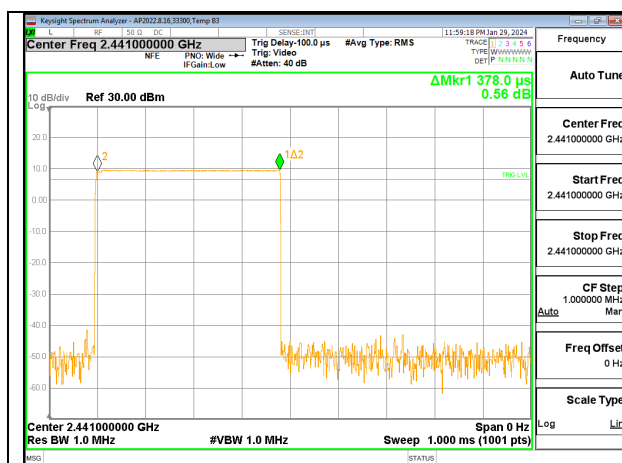

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

TEST PROCEDURE

Measurements were performed using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting Beamforming. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	0.00	-2.10	-0.92	2.02

DIRECTIONAL GAIN CALCULATION:

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \text{LOG}((10^{(\text{Ant1}/10)} + 10^{(\text{Ant2}/10)})/2)$

Correlated directional Gain= $10 \cdot \text{LOG}(((10^{(\text{Ant1}/20)} + 10^{(\text{Ant2}/20)})^2)/2)$

Sample Calculation:

Ant4=0.0, Ant3=-2.1

Uncorrelated Antenna gain= $10 \log[(10^{(0/10)} + 10^{(-2.1/10)})/2] = -0.92\text{dBi}$

Correlated Antenna gain= $10 \log[(10^{(0/20)} + 10^{(-2.1/20)})^2/2] = 2.02\text{dBi}$

RESULTS

9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION**ANT 4**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.15	21	-0.85
Middle	2441	19.80	21	-1.2
High	2480	19.66	21	-1.34

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.95	21	-1.05
Middle	2441	20.12	21	-0.88
High	2480	19.83	21	-1.17

9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.13	17.10	20.13	21	-0.87
Middle	2441	17.16	17.10	20.14	21	-0.86
High	2480	16.87	17.09	19.99	21	-1.01

9.6.3. HIGH POWER ENHANCED DATA RATE DQPSK MODULATION

ANT 4

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.69	21	-2.31
Middle	2441	18.71	21	-2.29
High	2480	18.82	21	-2.18

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.70	21	-2.3
Middle	2441	18.77	21	-2.23
High	2480	18.85	21	-2.15

9.6.4. HIGH POWER ENHANCED DATA RATE TXBF DQPSK MODULATION

ANT 4 + ANT 3

Tested By:	19336					
Date:	1/17/2024					
Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.59	15.64	18.63	21	-2.37
Middle	2441	15.52	15.63	18.59	21	-2.41
High	2480	15.76	15.59	18.69	21	-2.31

9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION**ANT 4**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.86	21	-2.14
Middle	2441	19.05	21	-1.95
High	2480	18.86	21	-2.14

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.92	21	-2.08
Middle	2441	19.00	21	-2
High	2480	18.91	21	-2.09

9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.85	16.03	18.95	21	-2.05
Middle	2441	15.56	15.71	18.65	21	-2.35
High	2480	15.93	15.83	18.89	21	-2.11

9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION**ANT 4**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.61	21	-9.39
Middle	2441	11.64	21	-9.36
High	2480	11.17	21	-9.83

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.98	21	-10.02
Middle	2441	11.10	21	-9.9
High	2480	11.06	21	-9.94

9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.60	10.94	14.29	21	-6.71
Middle	2441	11.58	11.09	14.35	21	-6.65
High	2480	11.11	11.12	14.13	21	-6.87

9.6.9. LOW POWER ENHANCED DATA RATE DQPSK MODULATION

ANT 4

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.39	21	-11.61
Middle	2441	9.39	21	-11.61
High	2480	8.57	21	-12.43

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.17	21	-11.83
Middle	2441	9.40	21	-11.6
High	2480	9.34	21	-11.66

9.6.10. LOW POWER ENHANCED DATA RATE TXBF DQPSK MODULATION

ANT 4 + ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.32	9.14	12.24	21	-8.76
Middle	2441	9.16	9.07	12.13	21	-8.87
High	2480	9.11	9.25	12.19	21	-8.81

9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.39	21	-11.61
Middle	2441	9.51	21	-11.49
High	2480	8.77	21	-12.23

ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.47	21	-11.53
Middle	2441	9.44	21	-11.56
High	2480	9.35	21	-11.65

9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.31	9.20	12.27	21	-8.73
Middle	2441	9.42	9.45	12.45	21	-8.55
High	2480	9.18	9.29	12.25	21	-8.75

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements were performed using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from the power meter.

RESULTS

9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION**ANT 4**

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.97
Middle	2441	19.64
High	2480	19.50

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.75
Middle	2441	19.93
High	2480	19.68

9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	16.95	16.91	19.94
Middle	2441	16.98	16.95	19.98
High	2480	16.68	16.93	19.82

9.7.3. HIGH POWER ENHANCED DATA RATE DQPSK MODULATION

ANT 4

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.35
Middle	2441	16.42
High	2480	16.41

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.33
Middle	2441	16.44
High	2480	16.45

9.7.4. HIGH POWER BASIC DATA RATE TXBF DQPSK MODULATION

ANT 4 + ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.37	13.40	16.40
Middle	2441	13.24	13.24	16.25
High	2480	13.35	13.17	16.27

9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION**ANT 4**

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.39
Middle	2441	16.46
High	2480	16.46

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.39
Middle	2441	16.46
High	2480	16.48

9.7.6. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.45	13.43	16.45
Middle	2441	13.26	13.29	16.29
High	2480	13.45	13.28	16.38

9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION**ANT 4**

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.45
Middle	2441	11.44
High	2480	11.00

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.81
Middle	2441	10.95
High	2480	10.90

9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION**ANT 4 + ANT 3**

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	11.44	10.75	14.12
Middle	2441	11.43	10.91	14.19
High	2480	10.93	10.93	13.94

9.7.9. LOW POWER ENHANCED DATA RATE DQPSK MODULATION

ANT 4

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.88
Middle	2441	6.85
High	2480	6.32

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.90
Middle	2441	6.88
High	2480	6.85

9.7.10. LOW POWER BASIC DATA RATE TXBF DQPSK MODULATION

ANT 4 + ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	6.90	6.88	9.90
Middle	2441	6.91	6.87	9.90
High	2480	6.54	6.85	9.71

9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.92
Middle	2441	6.93
High	2480	6.50

ANT 3

Tested By:	19336
Date	1/17/2024

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.94
Middle	2441	6.96
High	2480	6.93

9.7.12. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19336
Date:	1/17/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	6.95	6.92	9.95
Middle	2441	6.95	6.94	9.96
High	2480	6.64	6.96	9.81

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

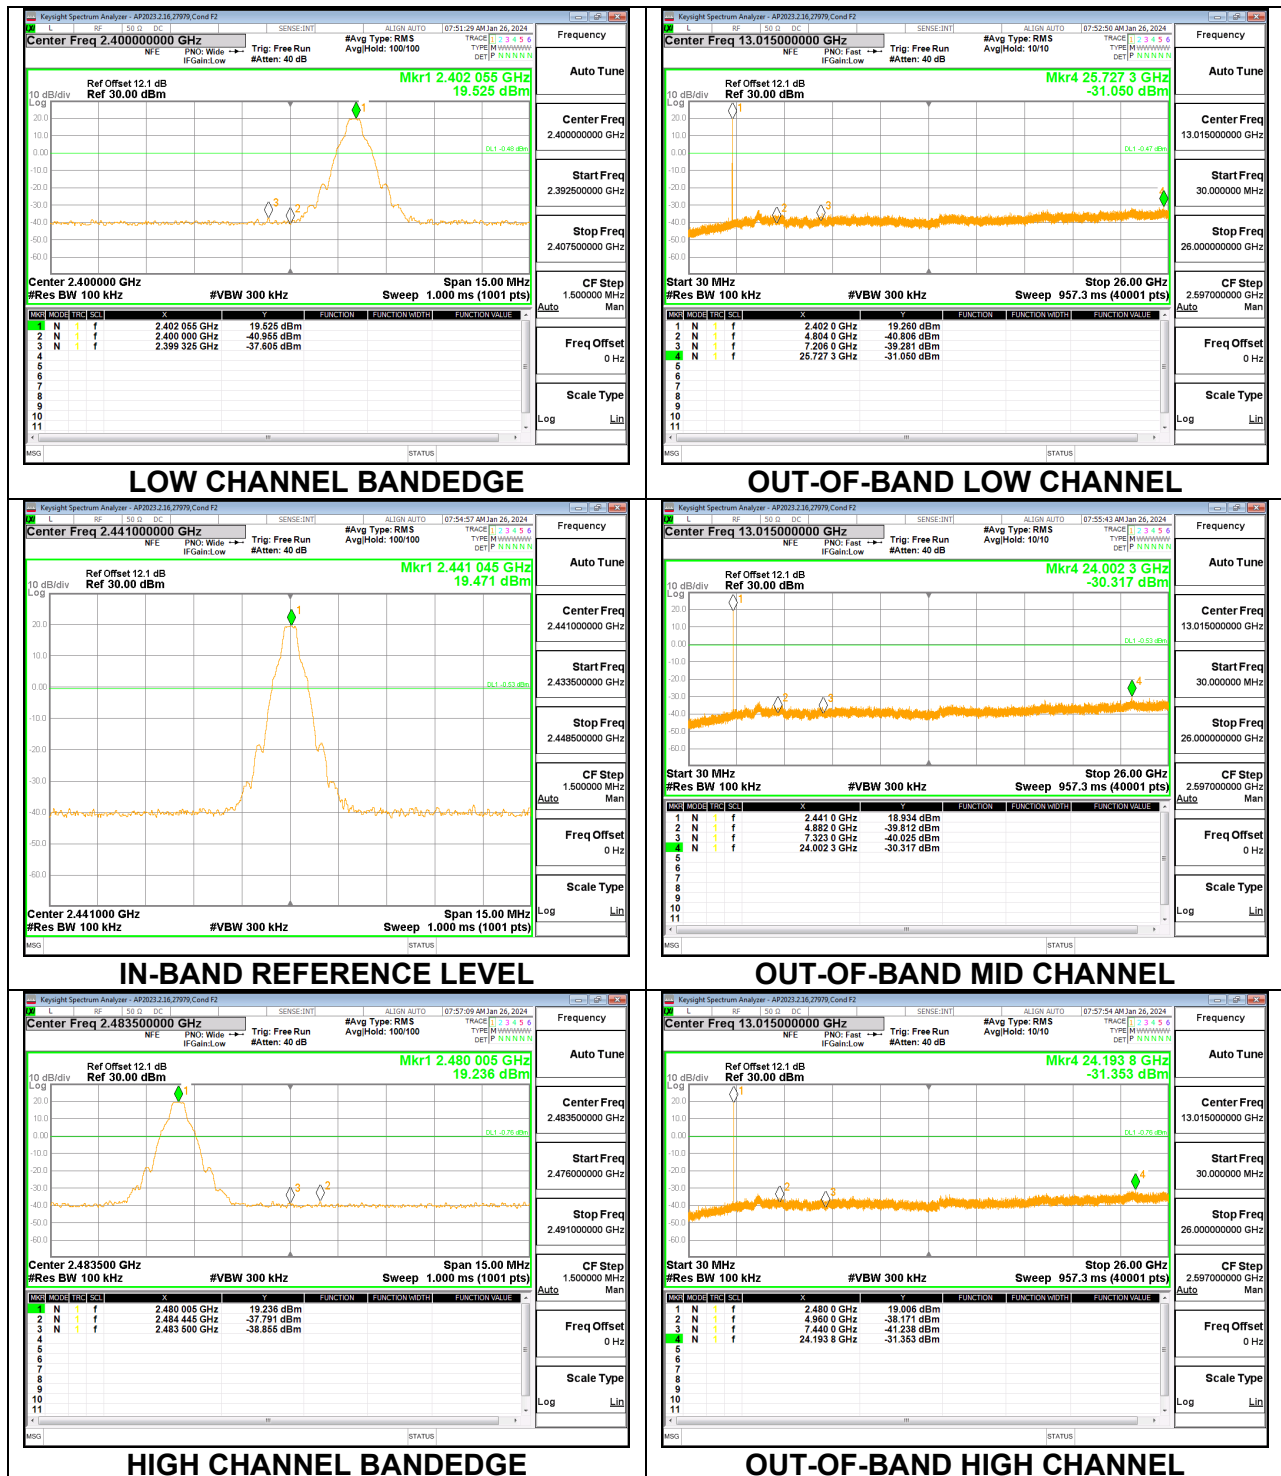

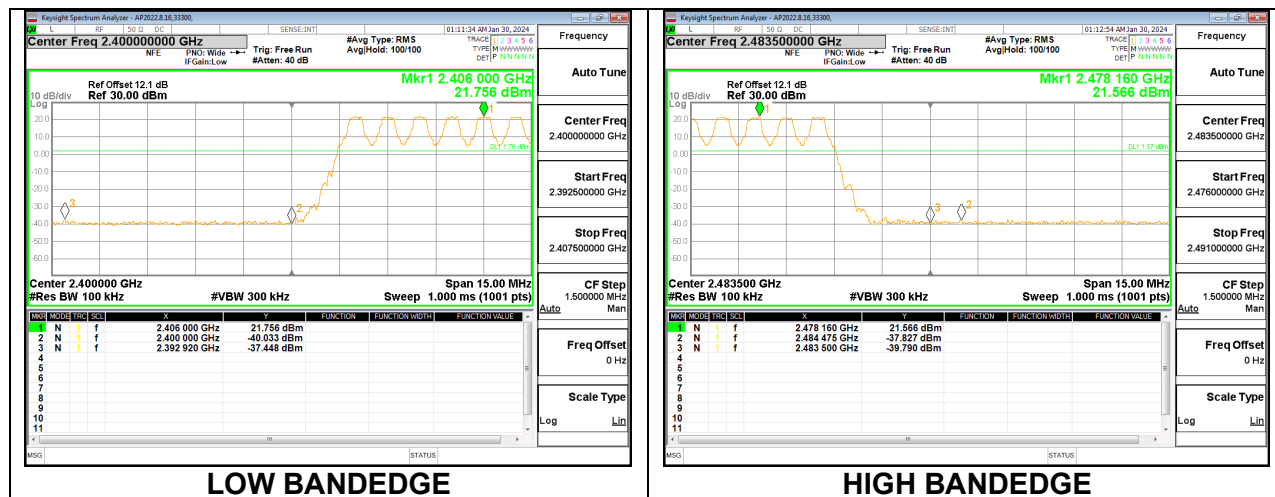ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

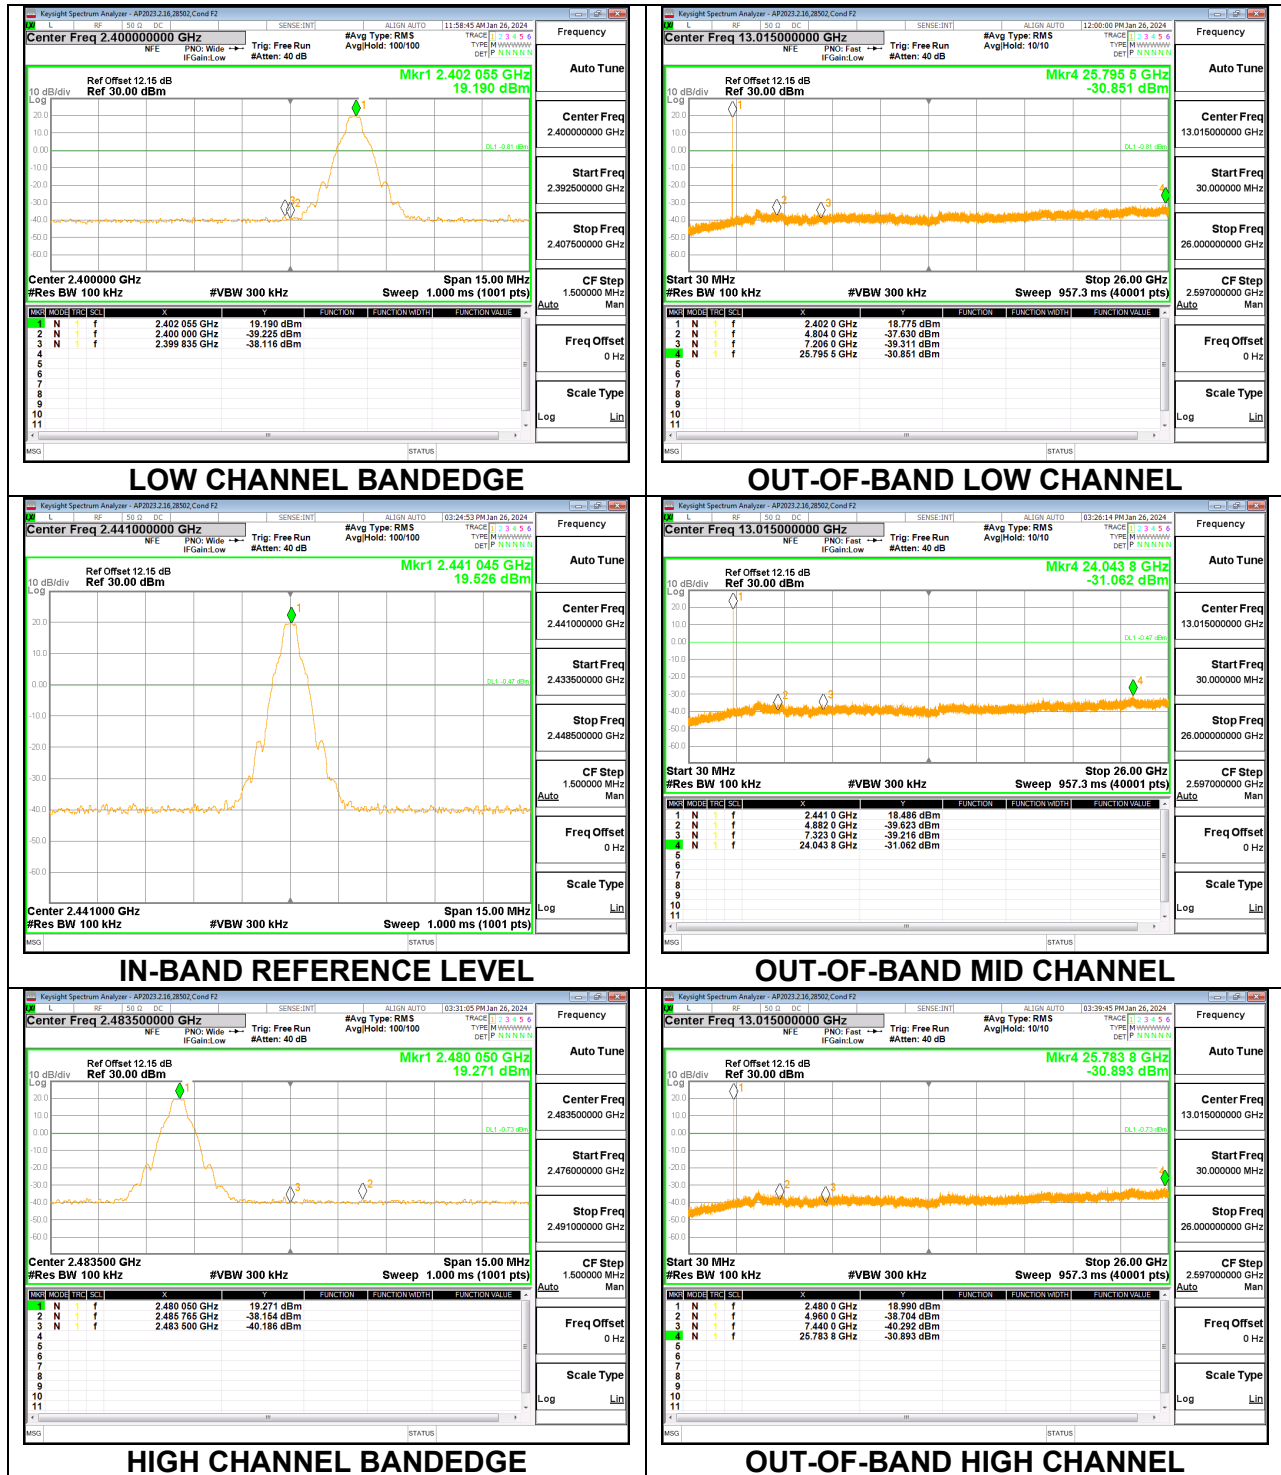
ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

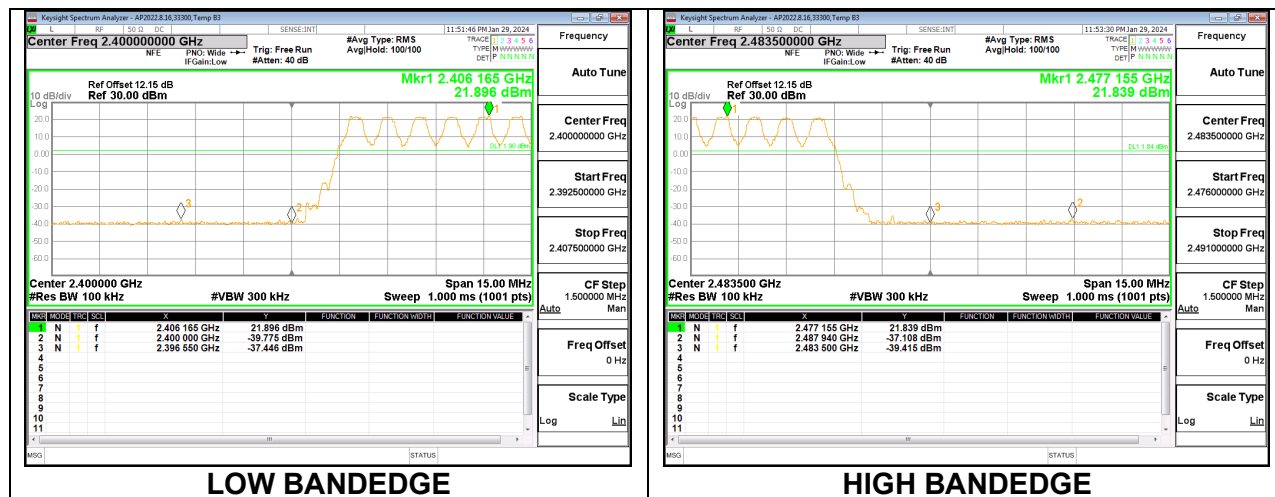
ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON


9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION


Note: Test procedure on beamforming mode is same as BT basic and EDR mode

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

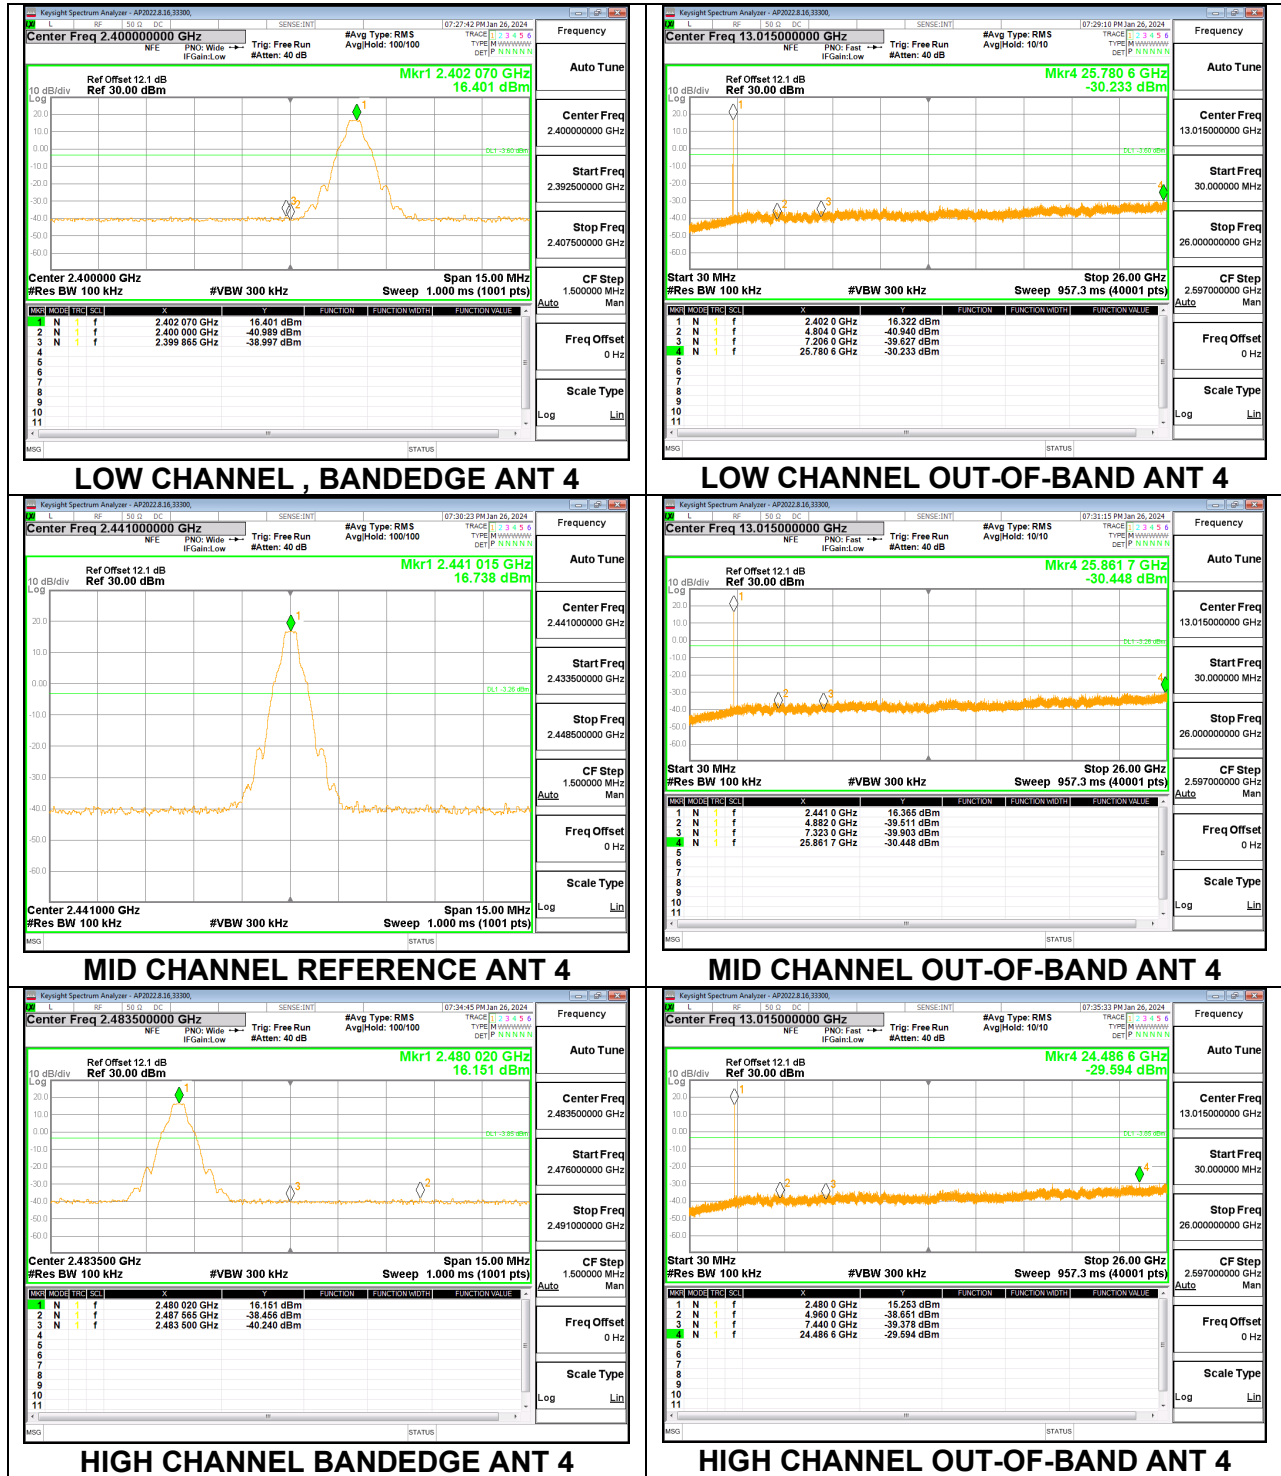

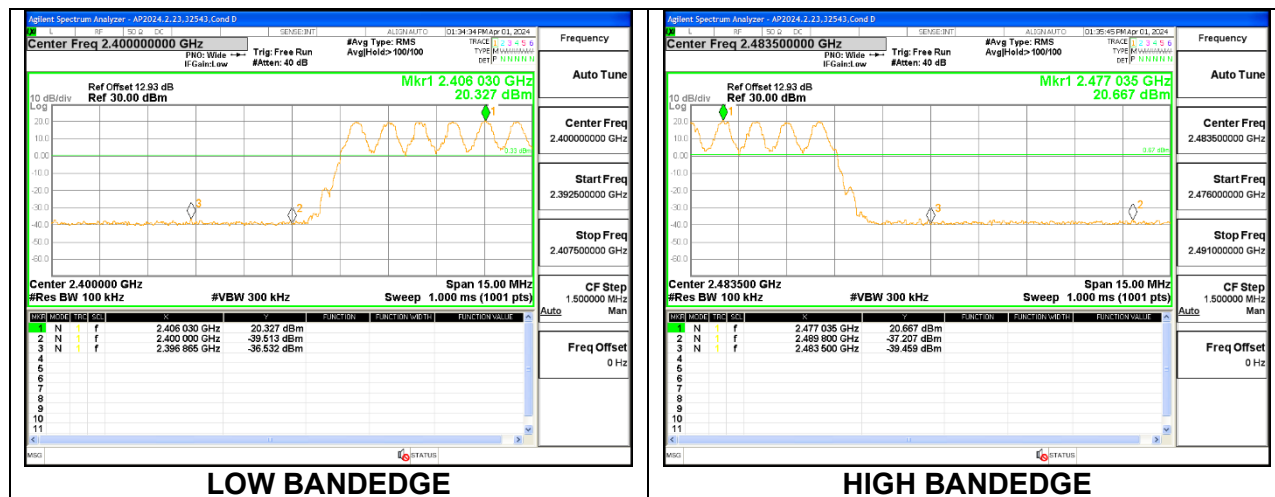
ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

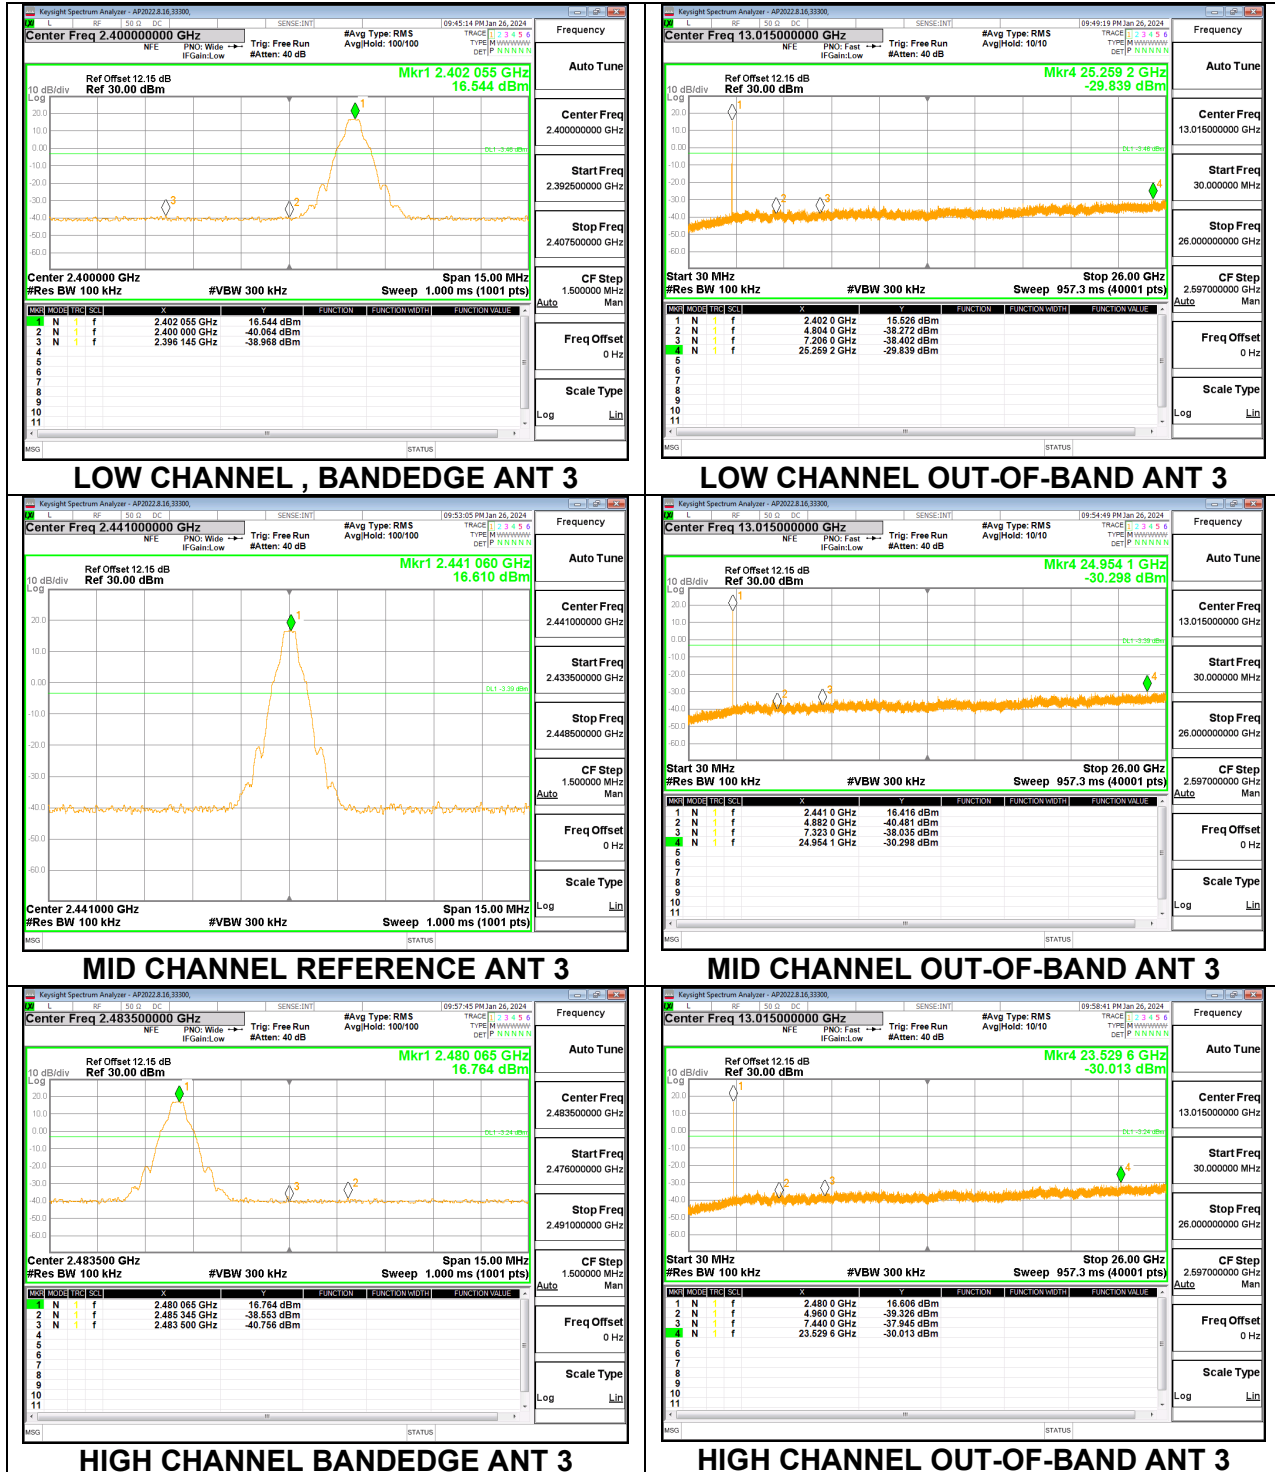
ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

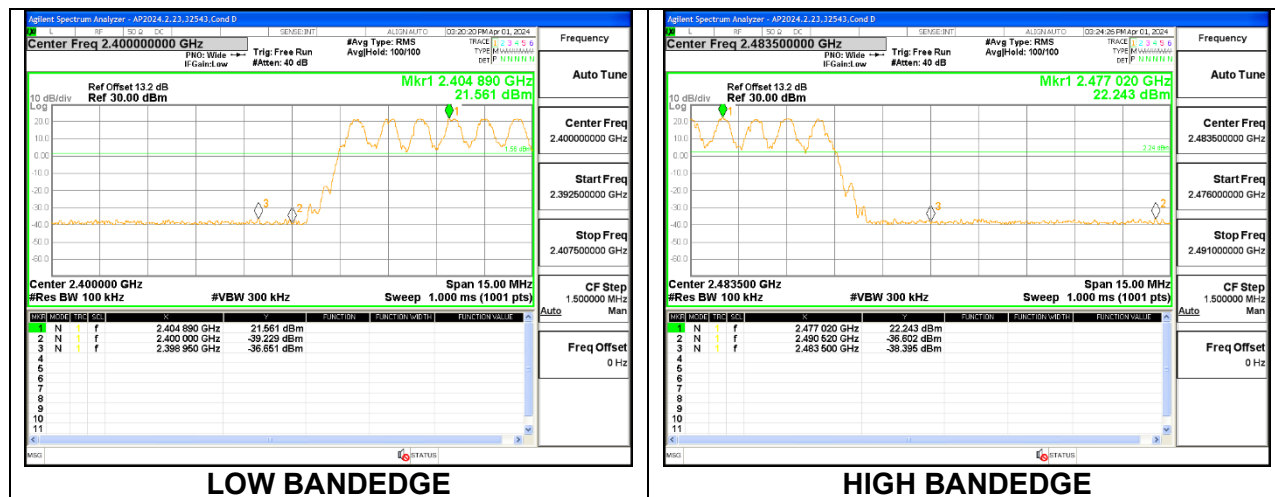
ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON


9.8.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

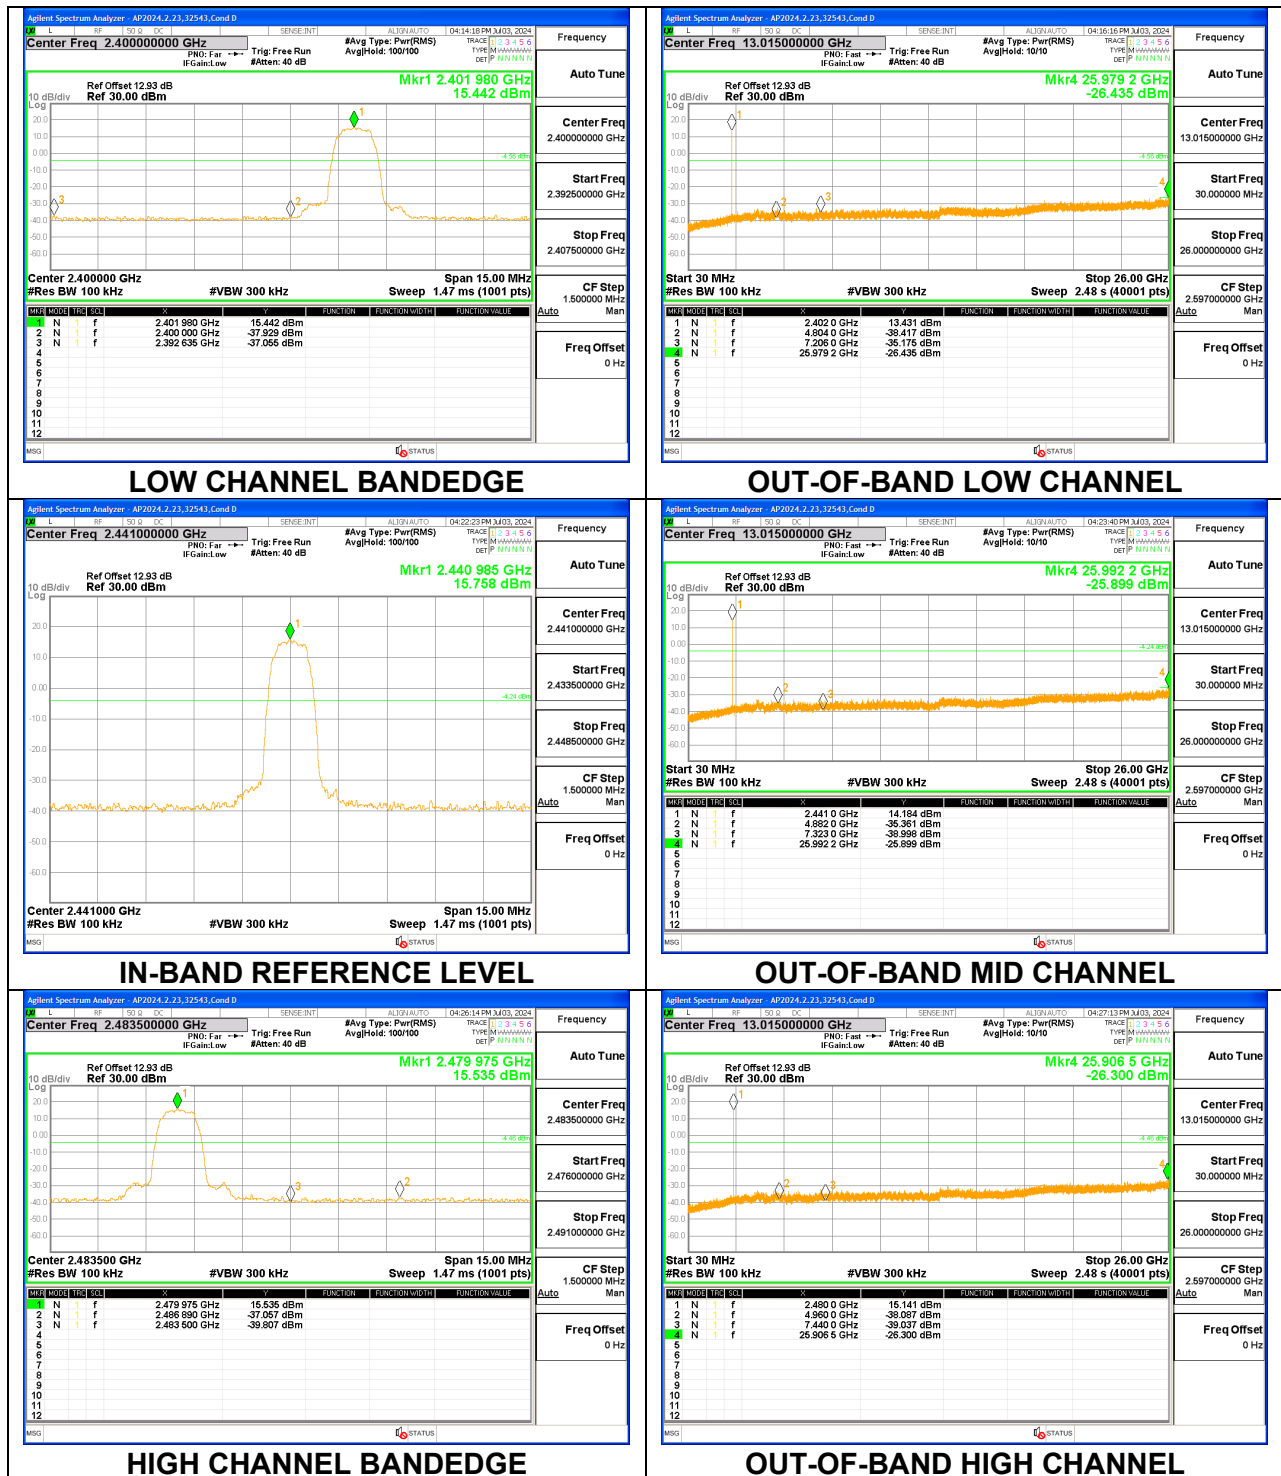

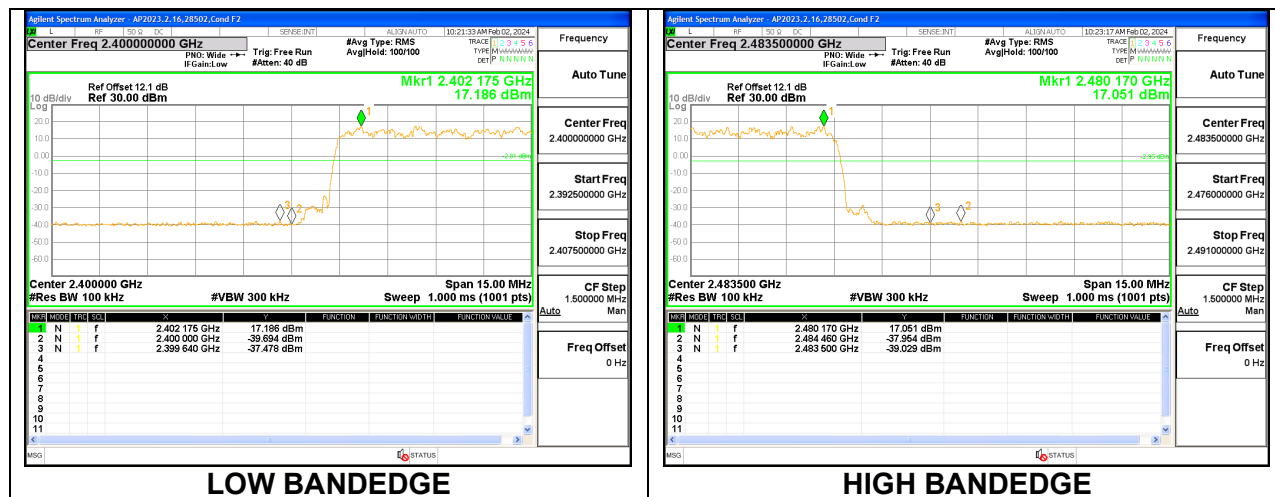ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

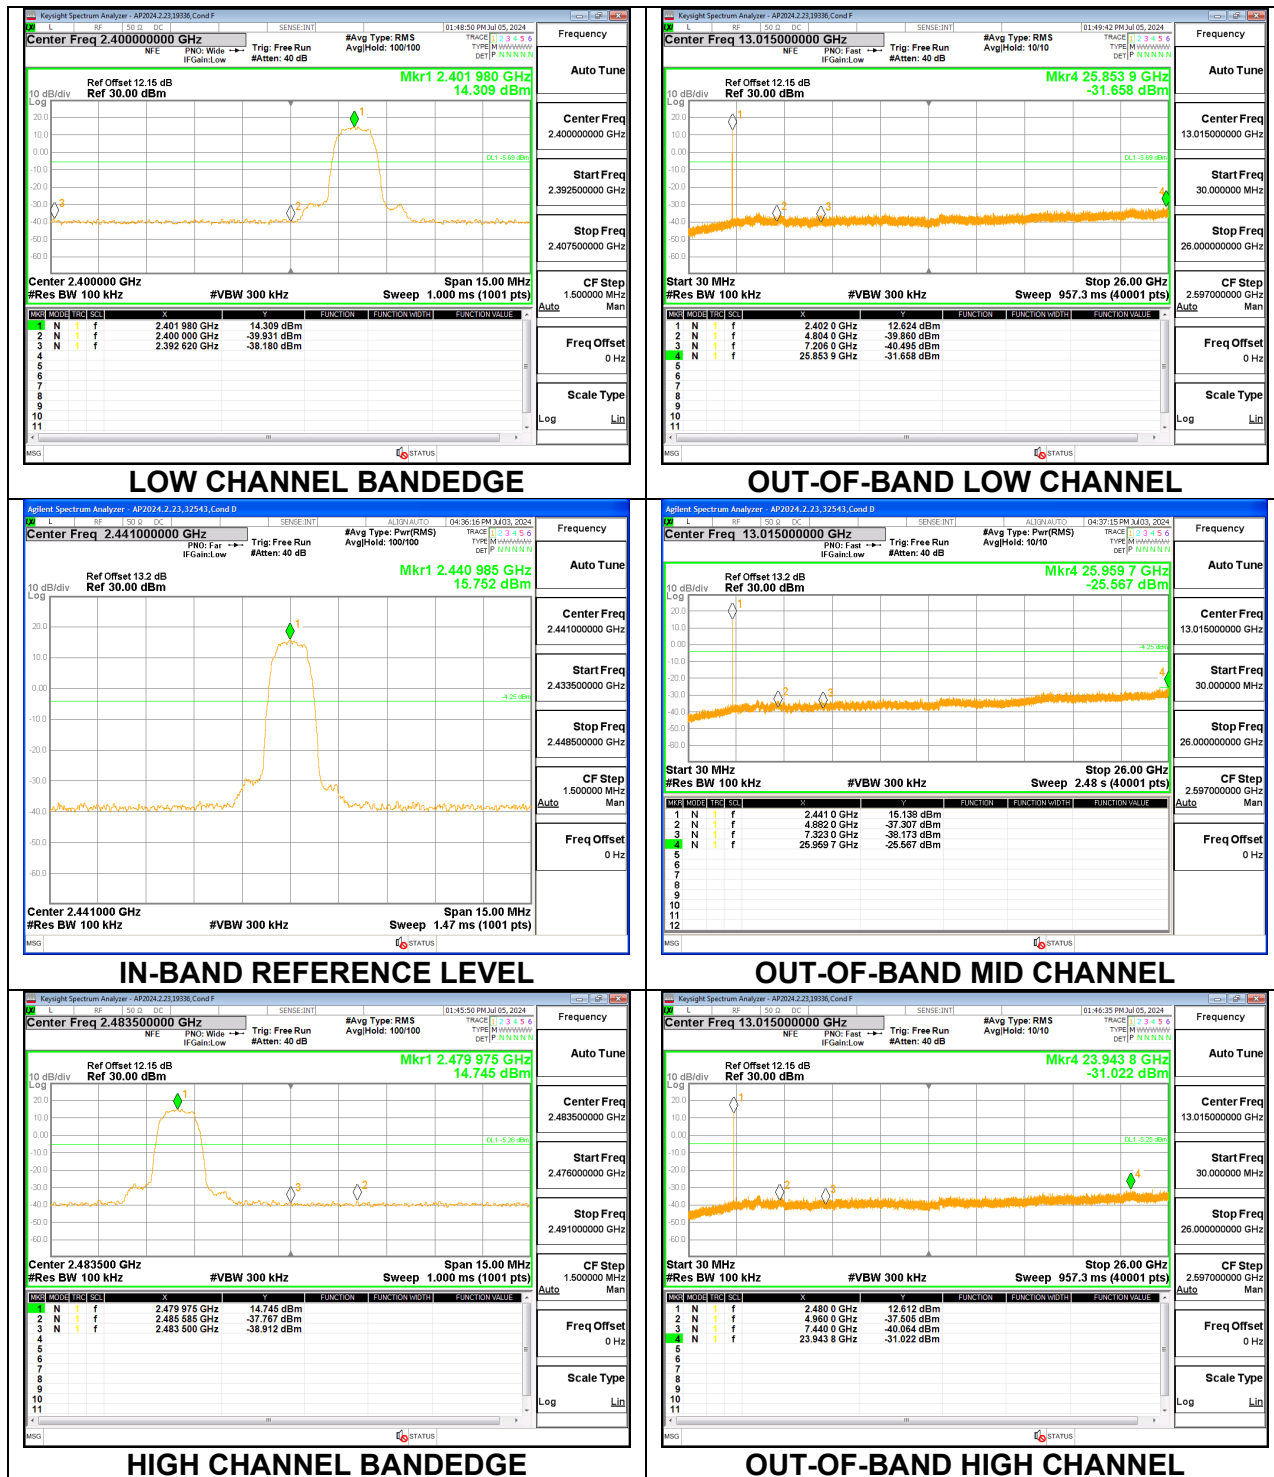
ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

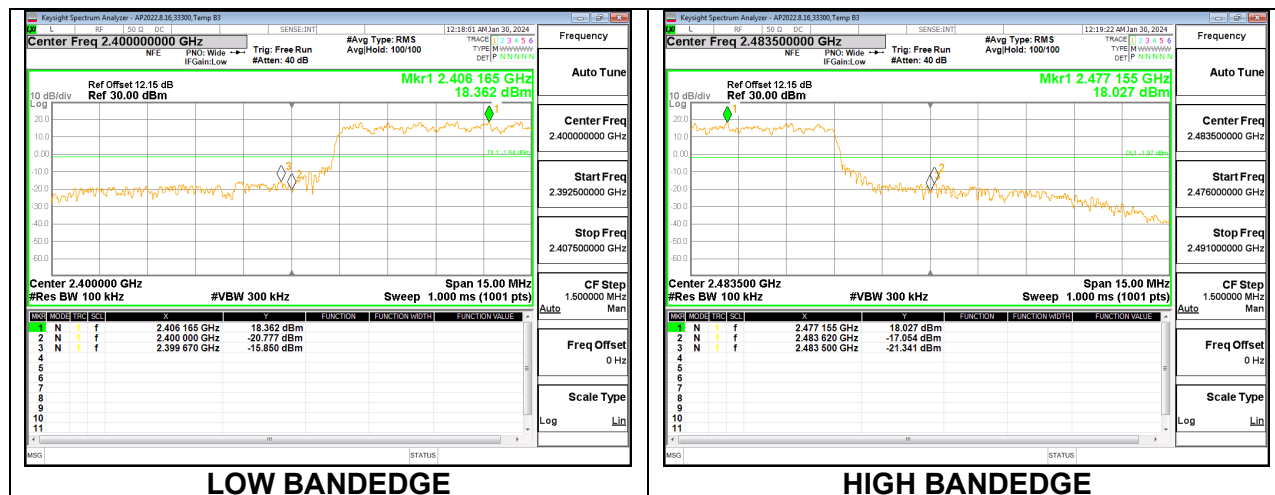
ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

9.8.4. HIGH POWER TXBF ENHANCED DATA RATE 8PSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

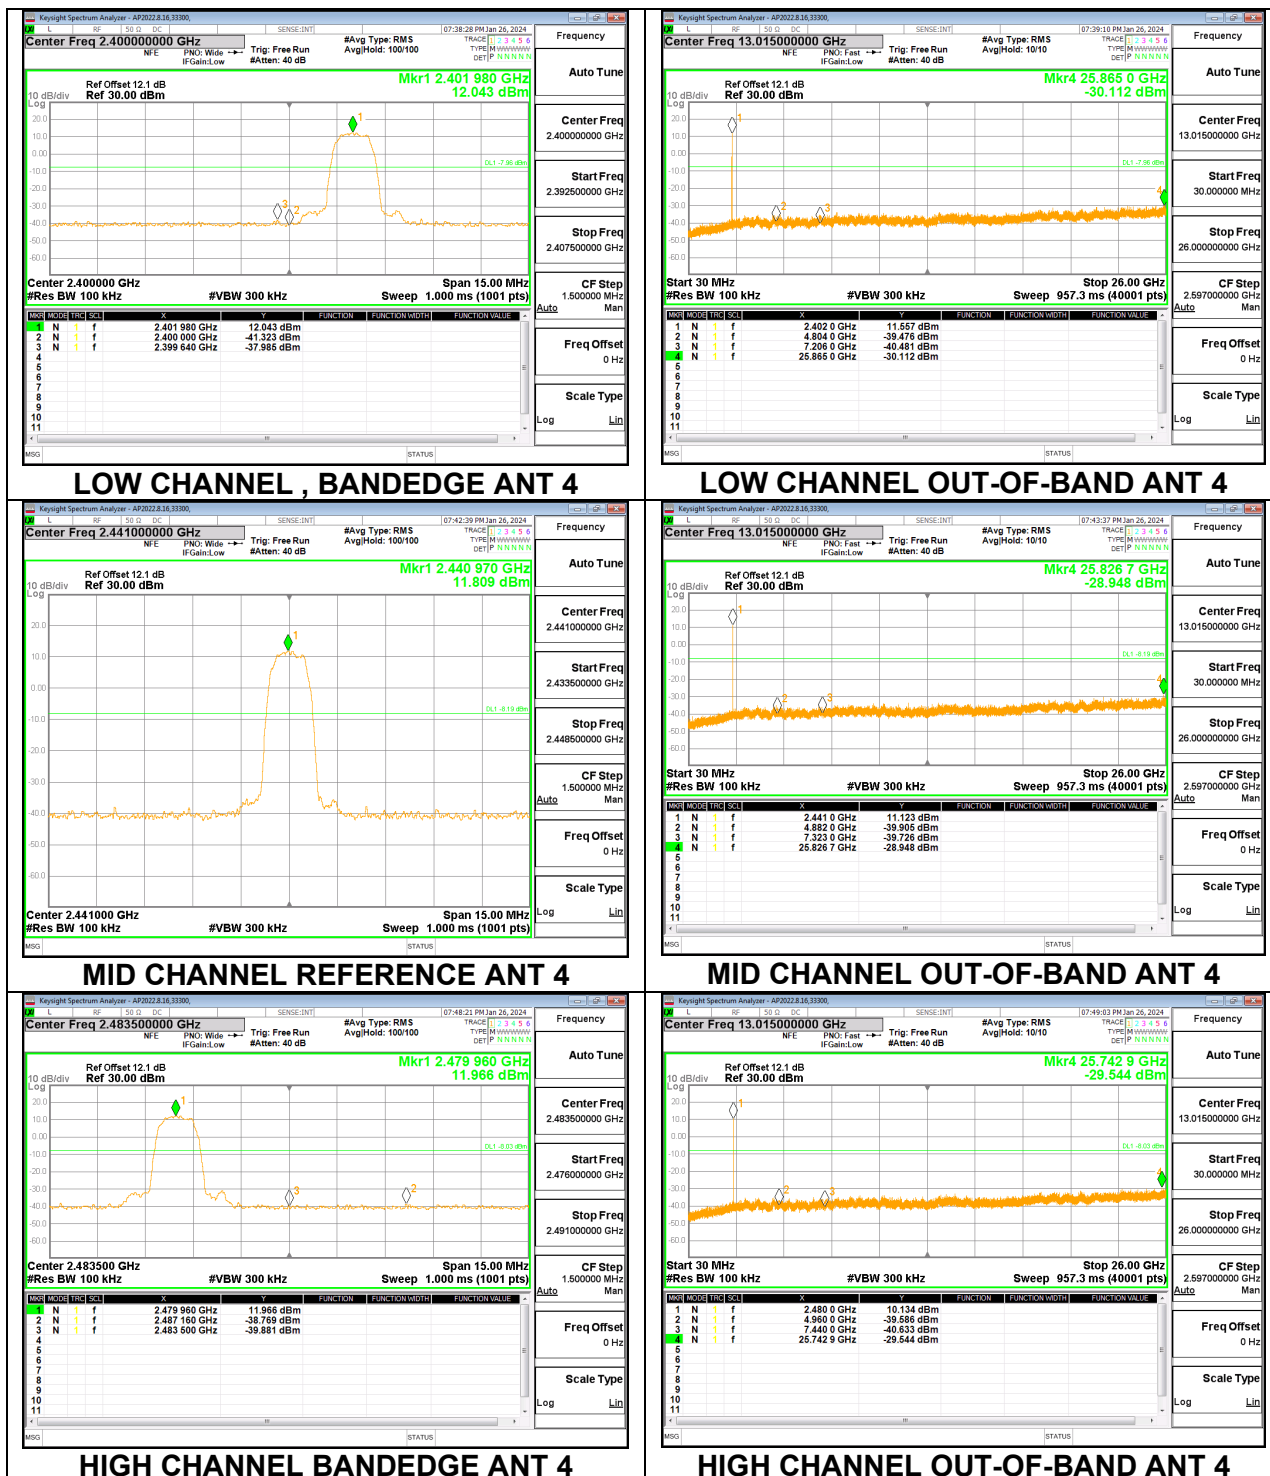

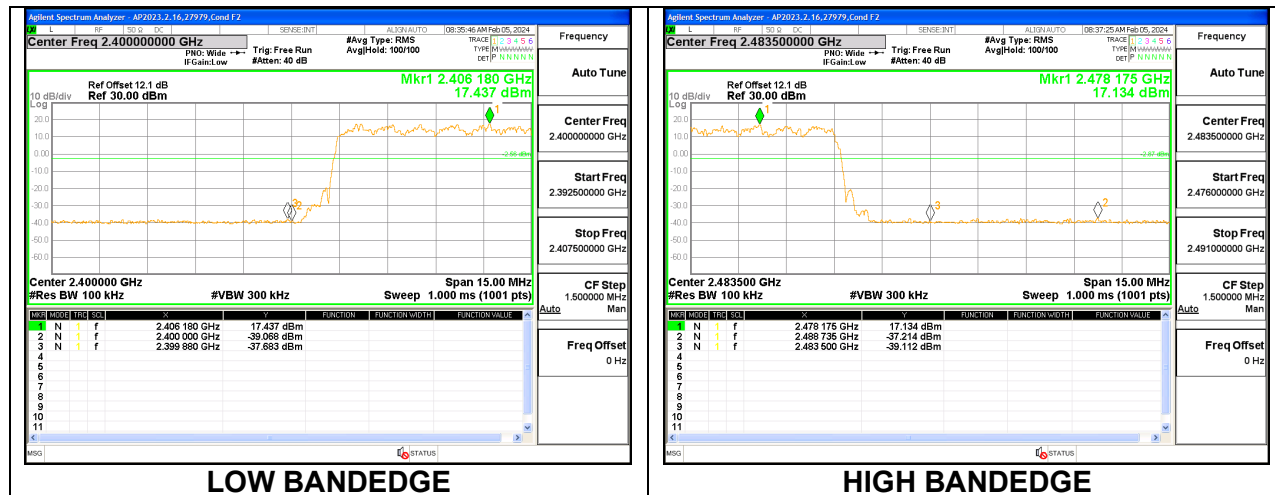ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

ANT 3 SPURIOUS EMISSIONS, NON-HOPPING