


8.3.28. BAND EDGE n260 SISO-DUAL 4CC



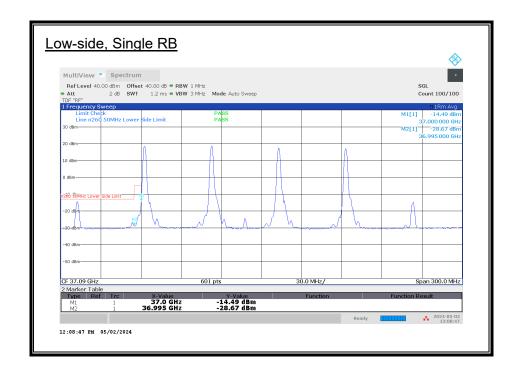

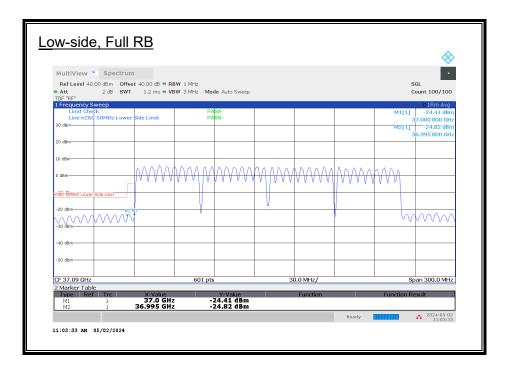

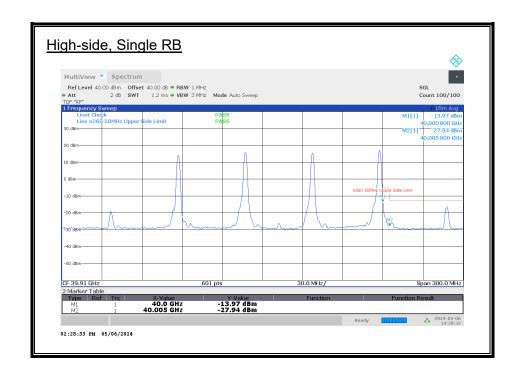

50 MHz, SISO-DUAL, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-14.49	-5	-9.49
	L	1/0	36.995	-28.67	-13	-15.67
		L 32/0 -	37	-24.41	-5	-19.41
	L		36.995	-24.82	-13	-11.82
50						
	Н	1/31	40	-13.97	-5	-8.97
	- "	1/31	40.005	-27.94	-13	-14.94
	ш	Н 32/0	40	-21.77	-5	-16.77
	П		40.005	-21.86	-13	-8.86

50 MHz, SISO-DUAL, 4CC, Pi/2 BPSK


BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
		1/0	37	-14.99	-5	-9.99
	L		36.995	-28.79	-13	-15.79
50						
	Н	1/31	40	-16.23	-5	-11.23
	П		40.005	-28.50	-13	-15.50


50 MHz, SISO-DUAL, 4CC, 16QAM


BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
		1/0	37	-14.85	-5	-9.85
	L		36.995	-29.16	-13	-16.16
50						
	Н	1/21	40	-16.76	-5	-11.76
	"	1/31	40.005	-28.11	-13	-15.11


50 MHz, SISO-DUAL, 4CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
		1/0	37	-15.66	-5	-10.66
	L		36.995	-29.28	-13	-16.28
50						
	Н	1/31	40	-17.45	-5	-12.45
	П		40.005	-28.17	-13	-15.17

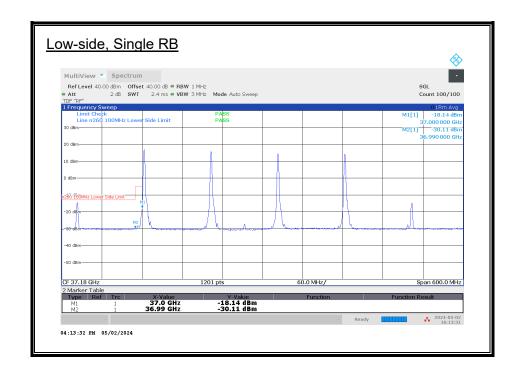

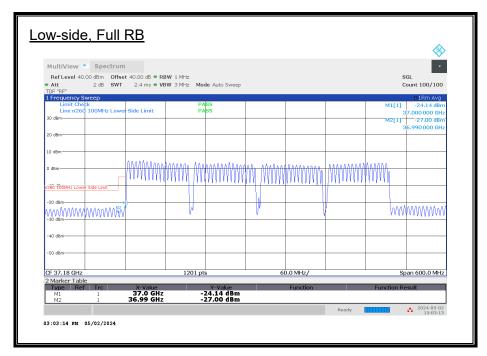


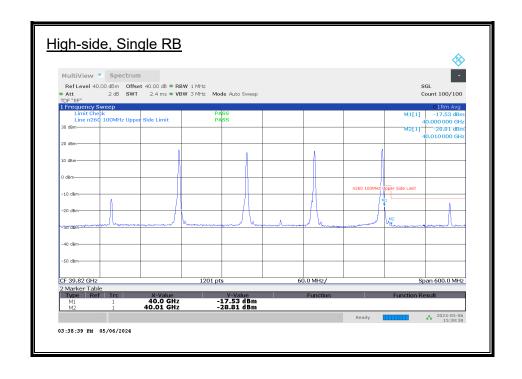


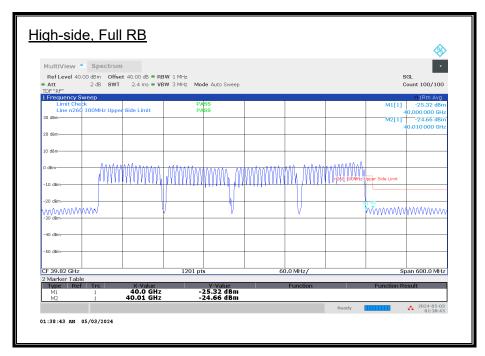


BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-18.14	-5	-13.14
	L	1/0	36.99	-30.11	-13	-17.11
	L	64/0	37	-24.14	-5	-19.14
	L		36.99	-27.00	-13	-14.00
100						
	Н	1/65	40	-17.53	-5	-12.53
	Н	1/65	40.01	-28.81	-13	-15.81
		64/2	40	-25.32	-5	-20.32
	Н	64/2	40.01	-24.66	-13	-11.66

8.3.29. BAND EDGE n260 MIMO 1CC

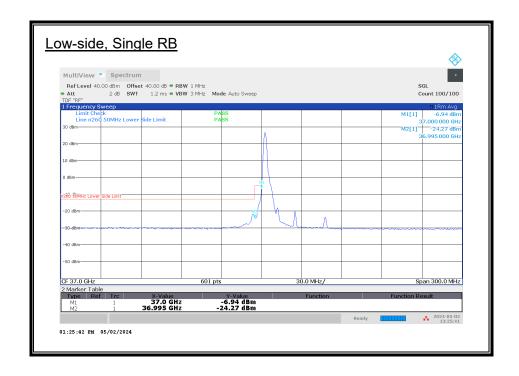


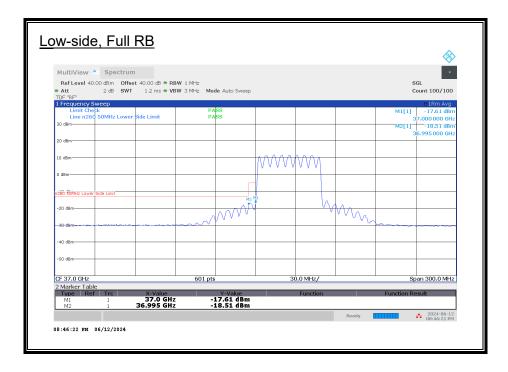


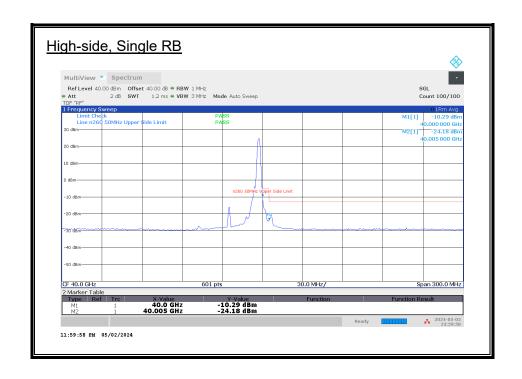




BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin	
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)	
	L	1/0	37	-6.94	-5	-1.94	
	L	1/0	36.995	-24.27	-13	-11.27	
		L	32/0	37	-17.61	-5	-12.61
	L	32/0	36.995	-18.51	-13	-5.51	
50							
	Н	1/31	40	-10.29	-5	-5.29	
	H 1/	1/31	40.005	-24.18	-13	-11.18	
		Н 32/0	40	-15.38	-5	-10.38	
	П		40.005	-18.41	-13	-5.41	

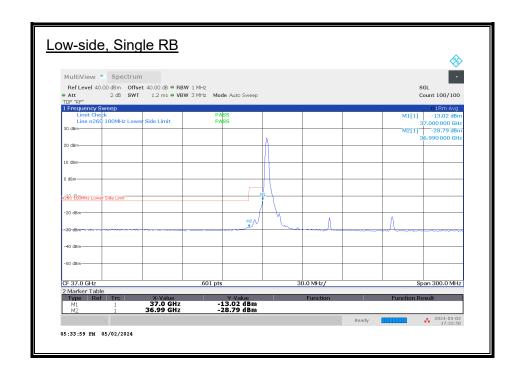

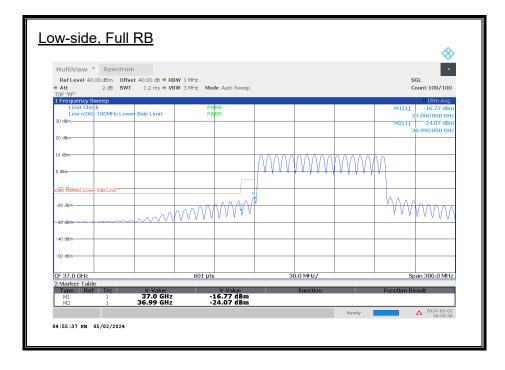


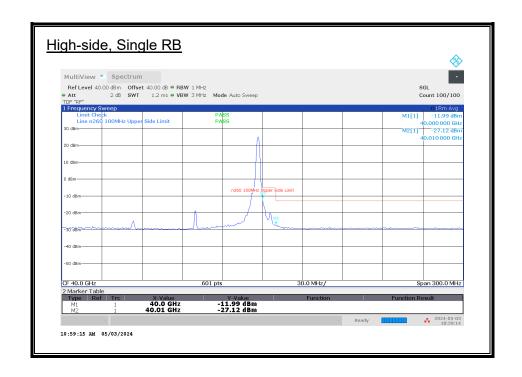




BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-13.02	-5	-8.02
	L	1/0	36.99	-28.79	-13	-15.79
	,	66/0	37	-16.77	-5	-11.77
	L		36.99	-24.07	-13	-11.07
100						
		1/65	40	-11.99	-5	-6.99
	Н	1/65	40.01	-27.12	-13	-14.12
		Н 66/0	40	-15.71	-5	-10.71
			40.01	-18.74	-13	-5.74

8.3.30. BAND EDGE n260 MIMO 2CC

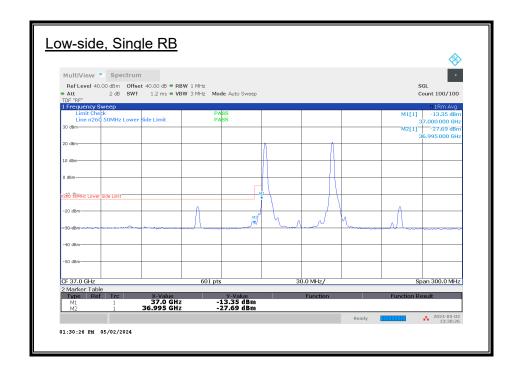




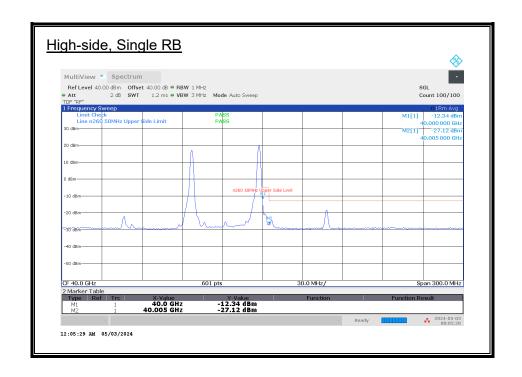




BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-13.35	-5	-8.35
	L	1/0	36.995	-27.69	-13	-14.69
		22/0	37	-24.96	-5	-19.96
	L	32/0	36.995	-28.26	-13	-15.26
50						
	Н	1/31	40	-12.34	-5	-7.34
	Н	1/31	40.005	-27.12	-13	-14.12
		32/0	40	-24.08	-5	-19.08
	Н		40.005	-25.36	-13	-12.36

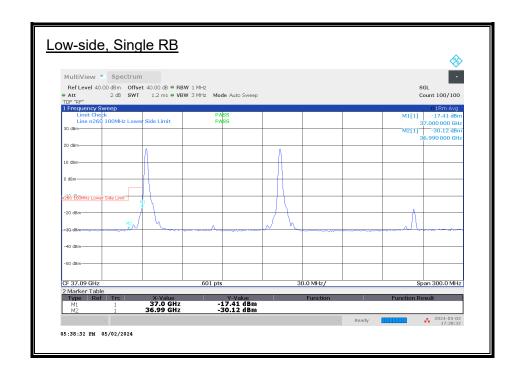




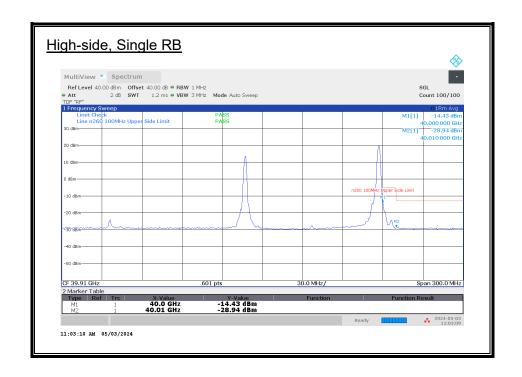





BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-17.41	-5	-12.41
	L	1/0	36.99	-30.12	-13	-17.12
		66/0	37	-26.06	-5	-21.06
	L		36.99	-27.85	-13	-14.85
100						
		1/65	40	-14.43	-5	-9.43
	Н	1/65	40.01	-28.94	-13	-15.94
		н 66/0	40	-26.05	-5	-21.05
	Н		40.01	-26.63	-13	-13.63

8.3.31. BAND EDGE n260 MIMO 3CC

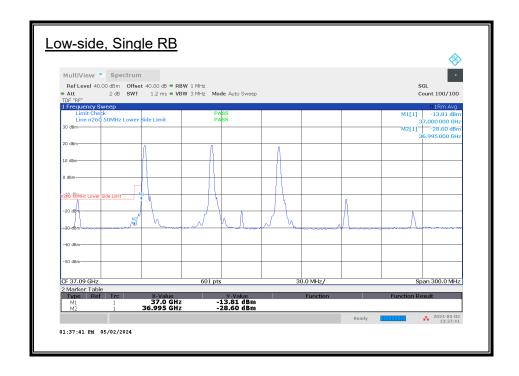


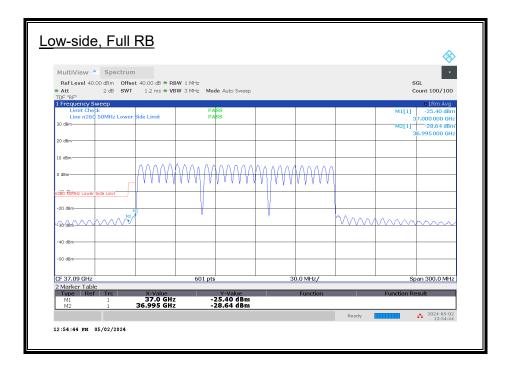


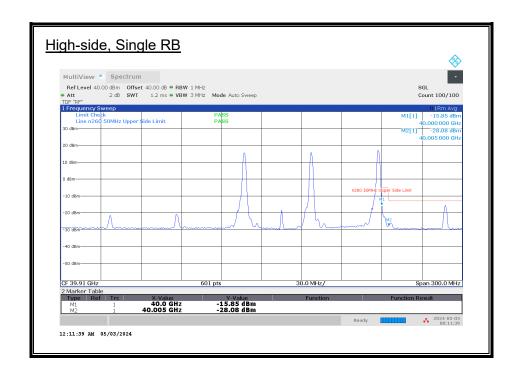





BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin	
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)	
	L	1/0	37	-13.81	-5	-8.81	
	L	1/0	36.995	-28.60	-13	-15.60	
		L	22/0	37	-25.40	-5	-20.40
	L	32/0	36.995	-28.64	-13	-15.64	
50							
	Н	1/31	40	-15.85	-5	-10.85	
	Н	1/31	40.005	-28.08	-13	-15.08	
		11 22/0	40	-25.40	-5	-20.40	
	Н	32/0	40.005	-28.11	-13	-15.11	

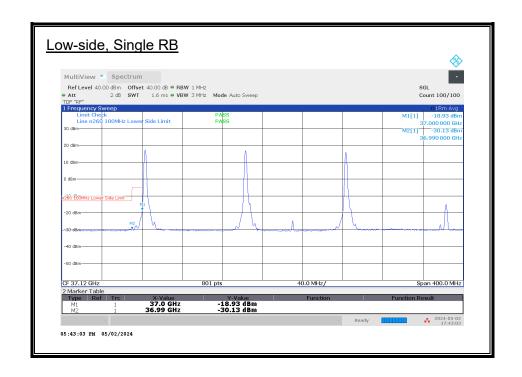

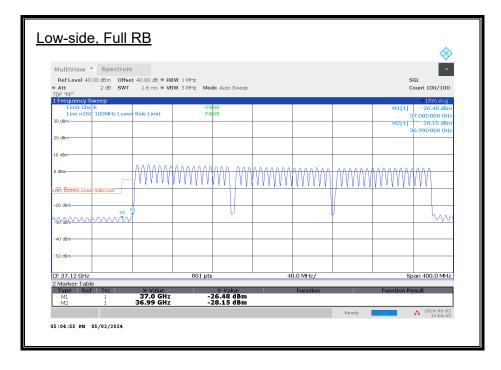


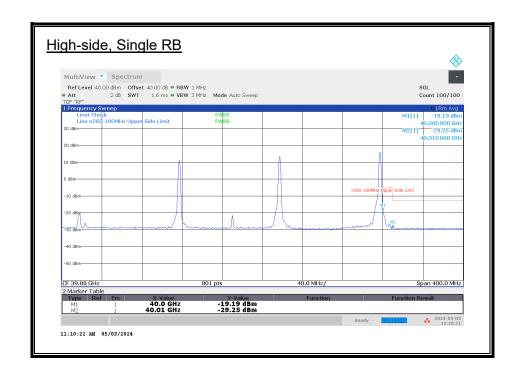

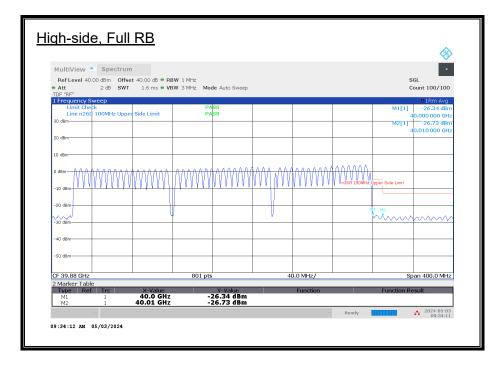


BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
		1/0	37	-18.93	-5	-13.93
	-	L 1/0	36.99	-30.13	-13	-17.13
		66/0	37	-26.48	-5	-21.48
	L	66/0	36.99	-28.15	-13	-15.15
100						
		1/65	40	-19.19	-5	-14.19
	Н	1/65	40.01	-29.25	-13	-16.25
		н 66/0	40	-26.34	-5	-21.34
	Н		40.01	-26.73	-13	-13.73

8.3.32. BAND EDGE n260 MIMO 4CC

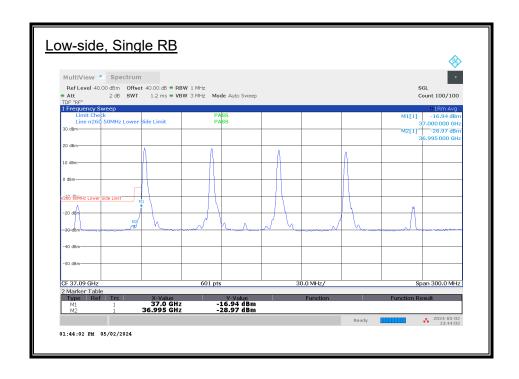





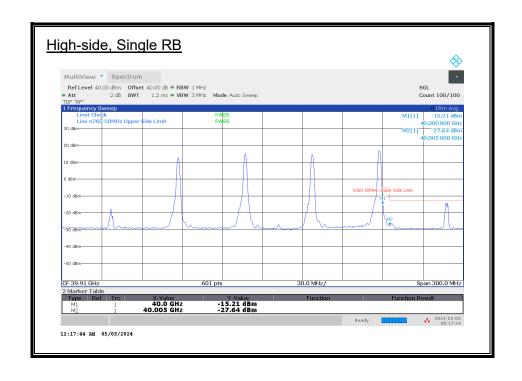




BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
	L	1/0	37	-16.94	-5	-11.94
	L	1/0	36.995	-28.97	-13	-15.97
		32/0	37	-26.35	-5	-21.35
	L		36.995	-29.04	-13	-16.04
50						
	- 11	1/31	40	-15.21	-5	-10.21
	Н	1/31	40.005	-27.64	-13	-14.64
		Н 32/0	40	-25.66	-5	-20.66
	"		40.005	-28.23	-13	-15.23

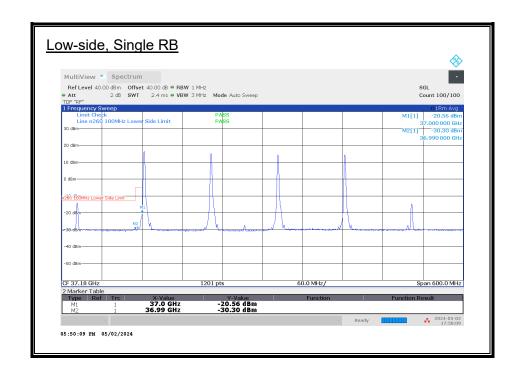

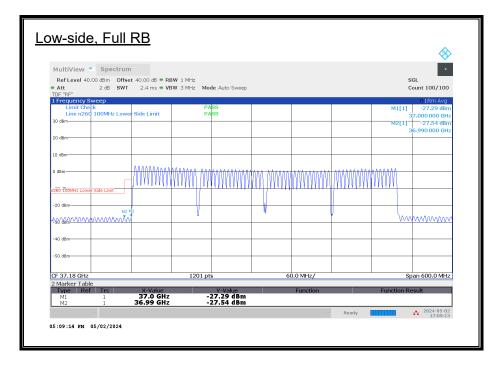

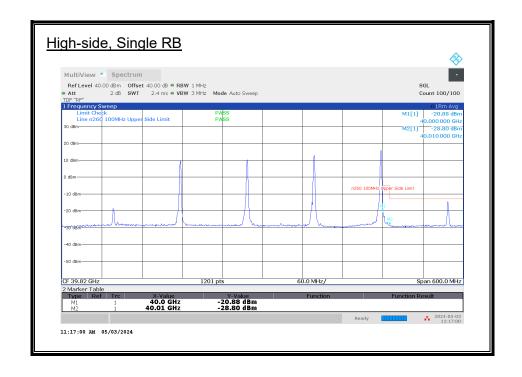



BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin	
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)	
	L	1/0	37	-20.56	-5	-15.56	
			36.99	-30.30	-13	-17.30	
100	L	66/0	37	-27.29	-5	-22.29	
		00/0	36.99	-27.54	-13	-14.54	
	Н	1/65	40	-20.88	-5	-15.88	
			40.01	-28.80	-13	-15.80	
	Н	66/0	40	-25.39	-5	-20.39	
			40.01	-28.48	-13	-15.48	

8.4. RADIATED SPURIOUS EMISSIONS

RULE PART(S)

FCC: §2.1051, §2.957(f), §30.203

LIMIT

30.203 - (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be −13 dBm/MHz or lower.

TEST PROCEDURE

KDB 842590 D01 Upper Microwave Flexible Use Service v01r02 Section 4.4.2 and Section 4.4.3. ANSI C63.26-2015 Clause 5.5 and Annex C.5.2.

All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits to demonstrate compliance.

Based on the pre-scan test results, the readings of emission in 9 kHz - 30 MHz range are attenuated more than 20 dB below the limit, therefore RSE was further investigated from 30 MHz - 100 GHz on n258 SB1, n258 SB2 and n261 bands, from 30 MHz - 200 GHz on n260 band.

Plots below 18 GHz are corrected field strength levels, measured at 3-meter test distance. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: EIRP (dBm) = E (dB μ V/m) + 20log(D) – 104.8; where D is the measurement distance (in the far field region) in m. The field strength E is calculated E (dB μ V/m) = Spectrum Analyzer Level (dBm) + Antenna Factor (dB/m) + Cable Loss (dB) + 107. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement.

RSEs from 1 – 200 GHz were measured at 1.5 meters height.

RSEs above 18 GHz were measured at the appropriate far field distances listed in Section 5.7 of this report (FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE). RSEs from 18 – 50 GHz were measured using a spectrum analyzer or EMI receiver with an internal preamplifier when applicable. Emissions above 50 GHz were measured using a downconverter with spectrum analyzer, while an external LNA was used when applicable.

EIRP of RSE was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factor of cable/waveguide extension loss, horn antenna gain, downconverter loss, LNA gain, and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

```
Total Correction Factor = Cable Loss (dB) – Horn Ant Gain (dBi) – LNA Gain (dB) + Downconverter Loss (dB) + Path Loss (dB) = 4 – 23 – 30 + 8 + 71 = 30 dB
```

EIRP = $P_{measured}$ (dBm), where Total Correction Factor preloaded.

Page 262 of 357

RSEs were measured using the configuration with the highest EIRP (QPSK, SISO-Dual mode and a single mid-RB) as representing the worst case. Preliminary radiated emissions tests at the low, middle and high channels indicated that the worst case radiated spurious emissions were on the channel with the highest EIRP and only the test data for that channel is included in this report.

The following configurations with highest EIRP from Ant M1 in each frequency band were used at RSE investigation at the pre-determined worst-case y-axis (portrait) orientation:

n258 SB1 band: SISO-DUAL_QPSK_100 MHz BW_High CH_RB Offset 1/32 (1RB-M)

n258 SB2 band: SISO-DUAL_QPSK_50 MHz BW_High CH_RB Offset 1/15 (1RB-M)

n261 band: SISO-DUAL_QPSK_50 MHz BW_Low CH_RB Offset 1/15 (1RB-M)

n260 band: SISO-DUAL QPSK 100 MHz BW Mid CH RB Offset 1/32 (1RB-M)

In addition, the 2CC to 4CC multi-carrier operations were verified for IMD products at the near upper and lower band edge regions, approximately 1 GHz wide. The measurements were made with the single RB active in each channel and plots showing the IMD products are provided. Both (50 MHz + 50 MHz) and (100 MHz + 100 MHz) channel bandwidths are tested and the signal level of the IMD products are similar for both modes. Antenna gain of EUT is not factored into the EIRP calculation of IMD product measurements. The test data for the worst case IMD emissions are reported.

Where the measured EIRP value is above the TRP limit, a TRP measurement is made. Otherwise, the EIRP value is compared with the §30.203 TRP limits to demonstrate compliance.

For the investigations of simultaneous transmission of multiple wireless technologies in the LTE B2 + 5G FR2 bands and 5.8 GHz Wi-Fi + 5G FR2 bands, no noticeable new emission with high amplitude was found.

RESULTS

See the following pages.


Employee IDs: 19459, 24303, 27294, 27446, 27780, 31925, 32226, 103479

Test Date: 04/25/24 - 06/17/24

Test Location Below 18 GHz: 04-RDE-L

Test Locations Above 18 GHz: 01-mmW-A, -B, -C & -D

8.4.1. RSE n258 SB1 30 - 1000 MHz

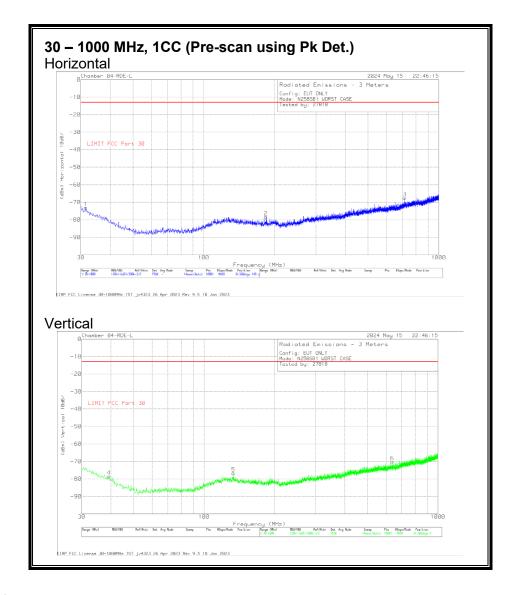


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ANSI ACF (dB/m)	Amp/Cbls (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.455	-79.3	Pk	25.6	-31.1	11.7	-73.1	-13	-60.1	0-360	149	Н
2	183.745	-77.66	Pk	17.1	-29.5	11.7	-78.36	-13	-65.36	0-360	149	Н
3	715.596	-78.02	Pk	26.2	-27.4	11.7	-67.52	-13	-54.52	0-360	149	Н
4	39.215	-79.36	Pk	20.2	-31	11.7	-78.46	-13	-65.46	0-360	149	V
5	133.499	-77.76	Pk	19.4	-30.1	11.7	-76.76	-13	-63.76	0-360	149	V
6	637.414	-79.63	Pk	25.5	-27.8	11.7	-70.23	-13	-57.23	0-360	149	V

Pk - Peak detector

8.4.2. RSE n258 SB1 1 - 18 GHz

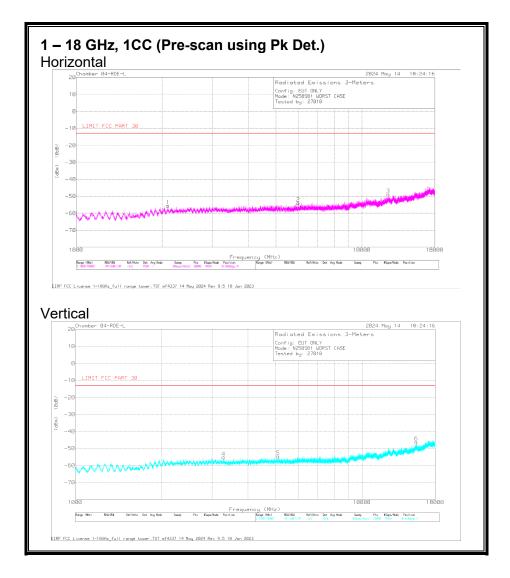



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2097.406	-47.11	Pk	31.5	-51.7	11.7	-55.61	-13	-42.61	0-360	399	Н
2	5986.352	-56.72	Pk	35.3	-44.3	11.7	-54.02	-13	-41.02	0-360	399	Н
3	12361.675	-60.51	Pk	38.6	-38.5	11.7	-48.71	-13	-35.71	0-360	399	Н
4	3289.166	-50.31	Pk	32.7	-49.3	11.7	-55.21	-13	-42.21	0-360	399	V
5	5102.308	-52.8	Pk	34.4	-48	11.7	-54.7	-13	-41.7	0-360	399	V
6	15461.782	-60.87	Pk	40.3	-37.2	11.7	-46.07	-13	-33.07	0-360	399	V

Pk - Peak detector


8.4.3. RSE n258 SB1 18 - 23 GHz

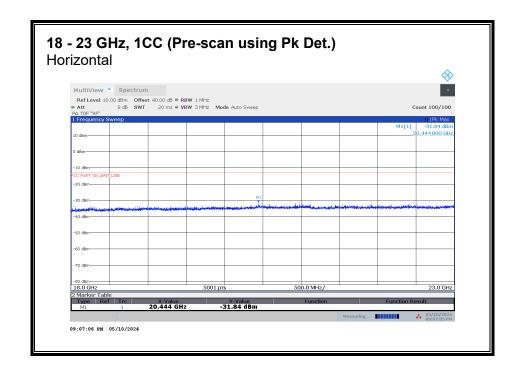


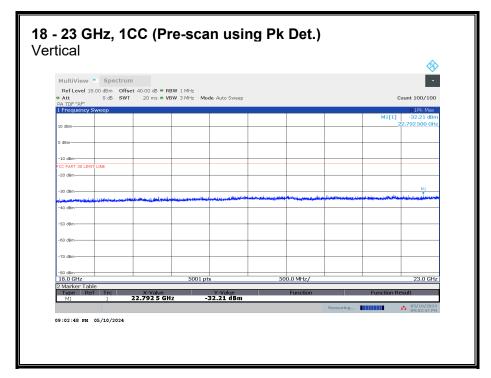

No emission detected using Peak Detection.

8.4.4. RSE n258 SB1 23 - 24.25 GHz

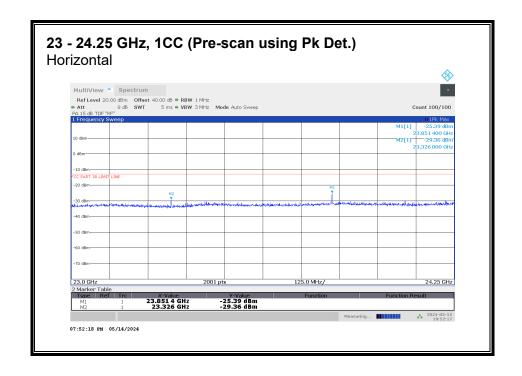

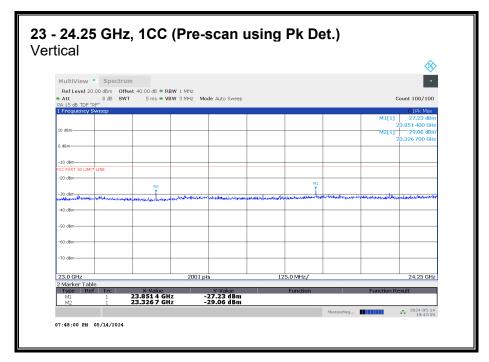


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

23 - 24.25 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
23.851	3.3	Ι	-40.09	-13	-27.09
23.851	3.3	V	-30.51	-13	-17.51
23.326	3.3	Н	-41.33	-13	-28.33
23.326	3.3	V	-32.28	-13	-19.28

23 - 24.25 GHz n258 SB1, 2CC

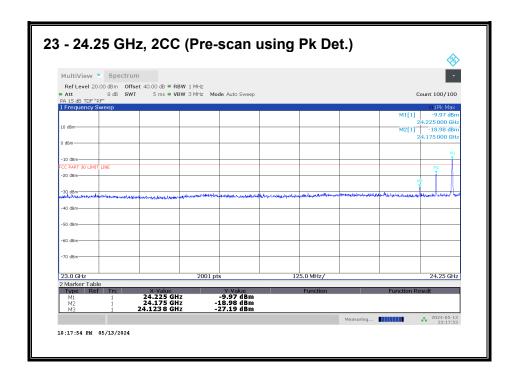


Worst case configuration: SISO-DUAL_QPSK_(50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP T		Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.224	3.3	-22.23	-13	-9.23

23 - 24.25 GHz n258 SB1, 3CC

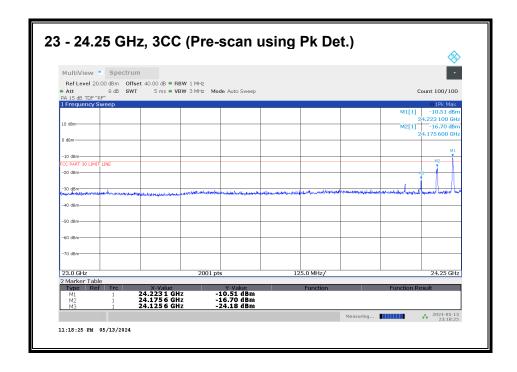


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.224	3.3	-21.74	-13	-8.74

23 - 24.25 GHz n258 SB1, 4CC

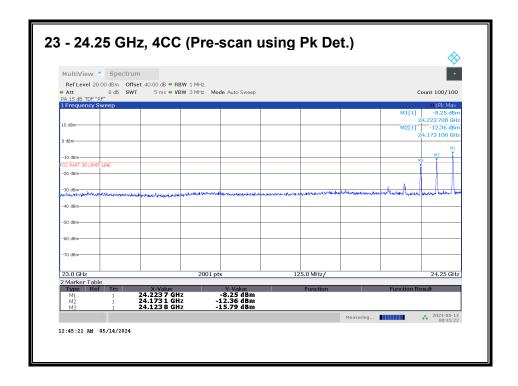

Worst case configuration:


SISO-DUAL QPSK (50 MHz +50 MHz + 50 MHz + 50 MHz) Low CH RB Offset 1/15 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. TRP TRP Limit		Margin	
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.224	3.3	-22.18	-13	-9.18

8.4.5. RSE n258 SB1 24.45 - 25.5 GHz

Note: 24.25 – 24.45 GHz covered by Fundamental and BE measurements.

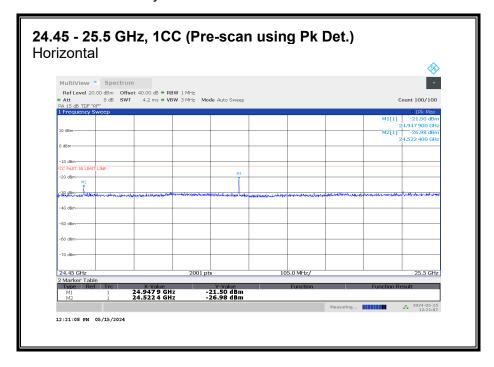


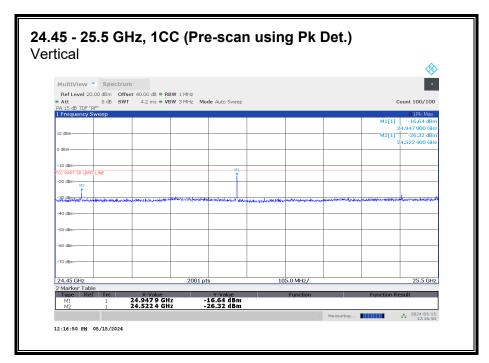

24.45 - 25.5 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.948	3.3	Н	-35.99	-13	-22.99
24.948	3.3	V	-22.59	-13	-9.59
24.522	3.3	Н	-35.90	-13	-22.90
24.522	3.3	V	-33.97	-13	-20.97

24.45 - 25.5 GHz n258 SB1, 2CC

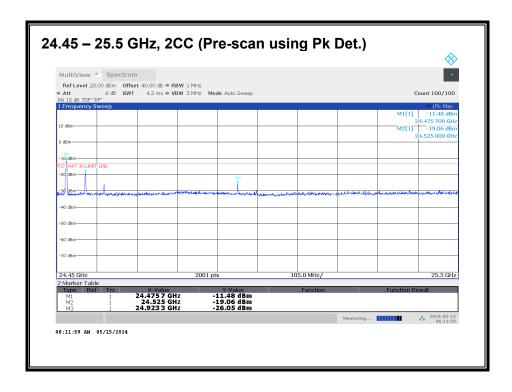


Worst case configuration: SISO-DUAL QPSK (50 MHz + 50 MHz) High CH RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP TRF		Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.474	3.3	-22.56	-13	-9.56

24.45 - 25.5 GHz n258 SB1, 3CC

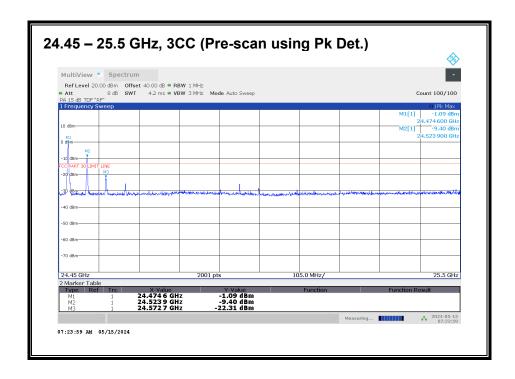


Worst case configuration: SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
27.474	3.3	-21.30	-13	-8.30

24.45 - 25.5 GHz n258 SB1, 4CC

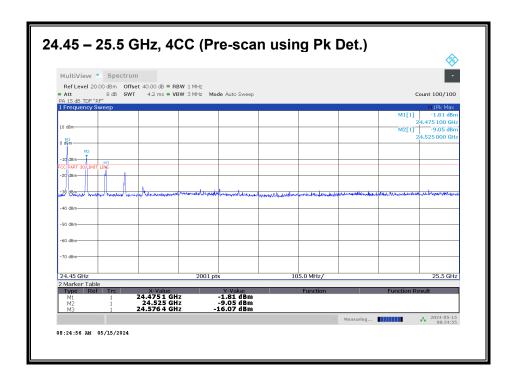


Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.474	3.3	-19.70	-13	-6.70


8.4.6. RSE n258 SB1 25.5 - 26.5 GHz

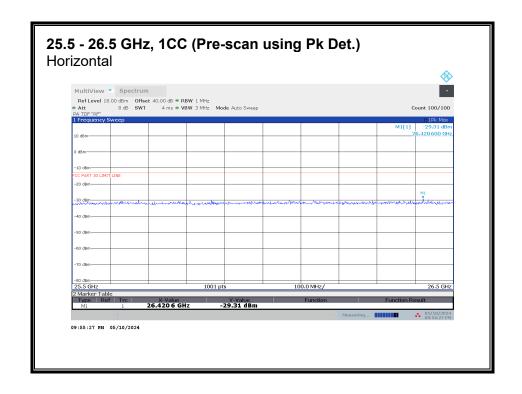


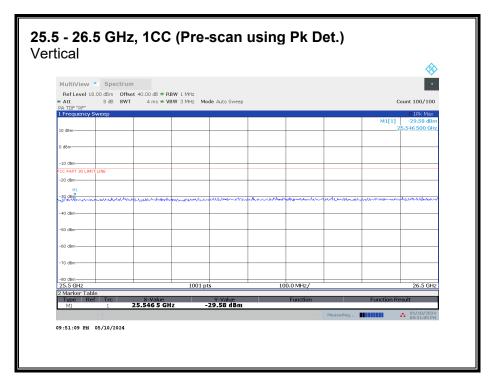

No emission detected using Peak Detection.

8.4.7. RSE n258 SB1 26.5 - 40 GHz

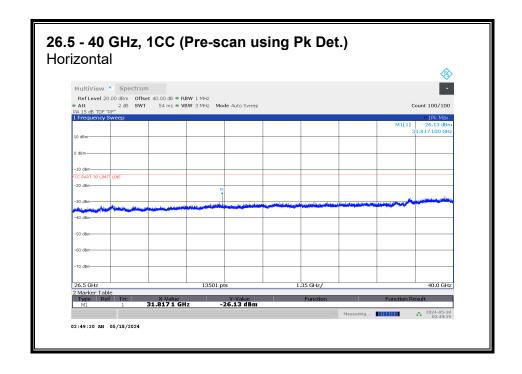


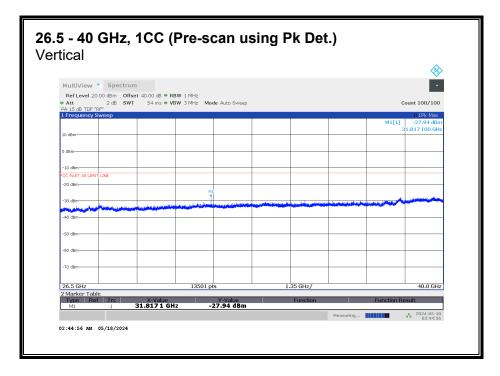


26.5 - 40 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
31.817	3	Н	-27.55	-13	-14.55
31.817	3	V	-39.72	-13	-26.72

8.4.8. RSE n258 SB1 40 - 50 GHz

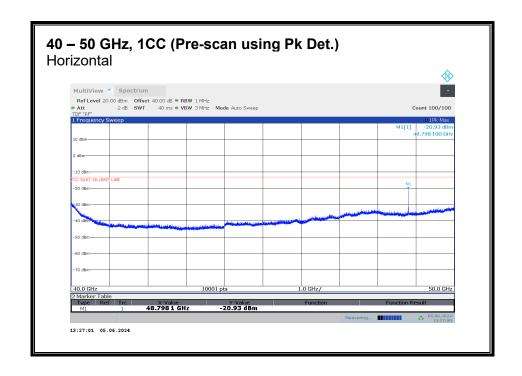


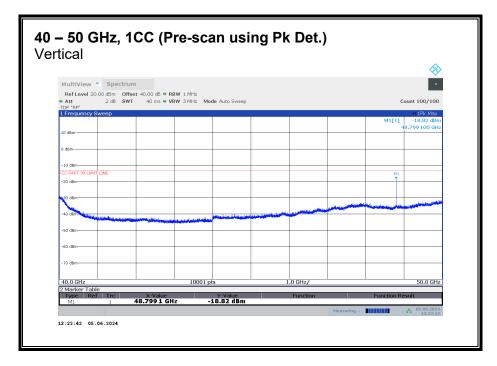


40 - 50 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
48.798	3	Н	-24.90	-13	-11.90
48.798	3	V	-26.46	-13	-13.46

8.4.9. RSE n258 SB1 50 - 75 GHz

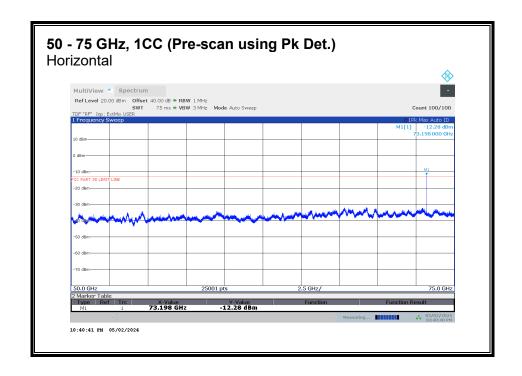


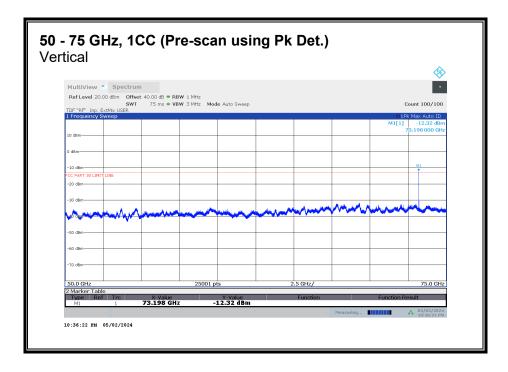


50 - 75 GHz n258 SB1

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
73.198	1.5	-24.89	-13	-11.89


8.4.10. RSE n258 SB1 75 - 100 GHz

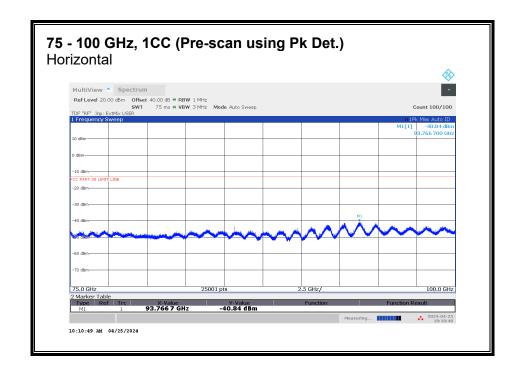

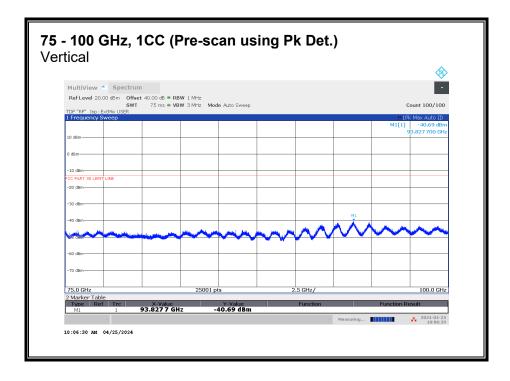

No emission detected using Peak Detection.

8.4.11. RSE n258 SB2 30 - 1000 MHz

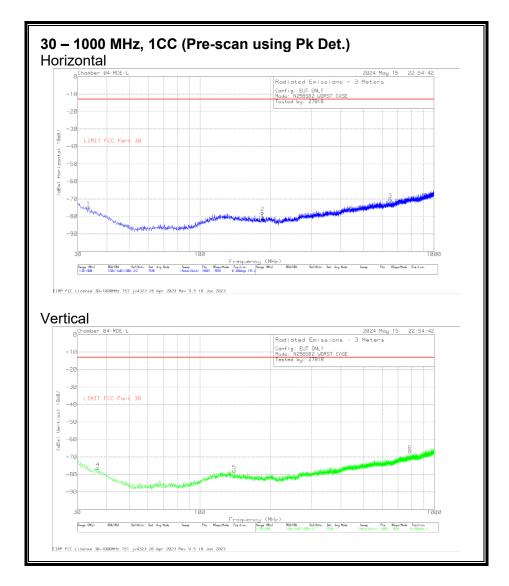


Trace Markers

Ma	arker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ANSI ACF (dB/m)	Amp/Cbls (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	1	33.395	-79.65	Pk	24.3	-31	11.7	-74.65	-13	-61.65	0-360	149	Н
	2	184.812	-77.13	Pk	17.1	-29.5	11.7	-77.83	-13	-64.83	0-360	149	Н
	3	649.539	-79.72	Pk	25.5	-27.8	11.7	-70.32	-13	-57.32	0-360	149	Н
	4	36.693	-79.05	Pk	22	-31	11.7	-76.35	-13	-63.35	0-360	149	V
	5	140.192	-78.47	Pk	18.9	-30	11.7	-77.87	-13	-64.87	0-360	149	V
	6	785.727	-78.31	Pk	27.1	-27.2	11.7	-66.71	-13	-53.71	0-360	149	V

Pk - Peak detector

8.4.12. RSE n258 SB2 1 - 18 GHz

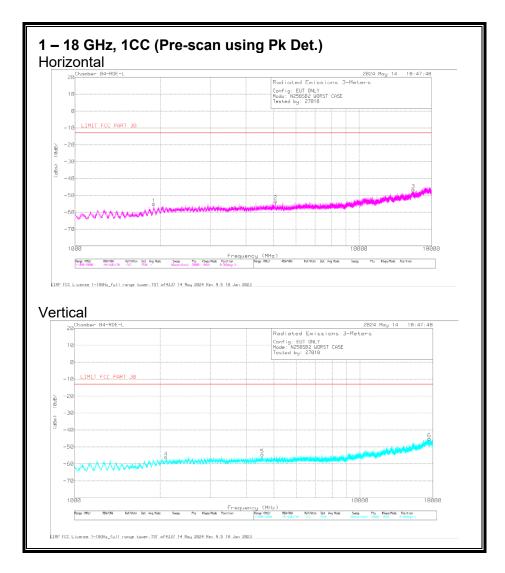



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1892.545	-45.8	Pk	30.7	-51.7	11.7	-55.1	-13	-42.1	0-360	400	Н
2	5087.007	-51.31	Pk	34.4	-48.2	11.7	-53.41	-13	-40.41	0-360	400	Н
3	15528.085	-61.47	Pk	40.4	-37.2	11.7	-46.57	-13	-33.57	0-360	400	Н
4	2096.555	-47.61	Pk	31.5	-51.7	11.7	-56.11	-13	-43.11	0-360	299	V
5	4552.33	-51.84	Pk	34.2	-48.6	11.7	-54.54	-13	-41.54	0-360	399	V
6	17498.485	-65.9	Pk	41.8	-32.7	11.7	-45.1	-13	-32.1	0-360	399	V

Pk - Peak detector

8.4.13. RSE n258 SB2 18 - 24 GHz

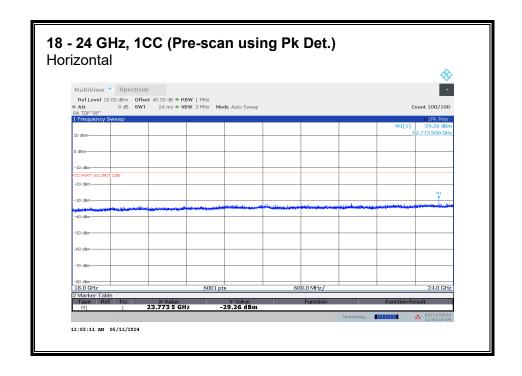


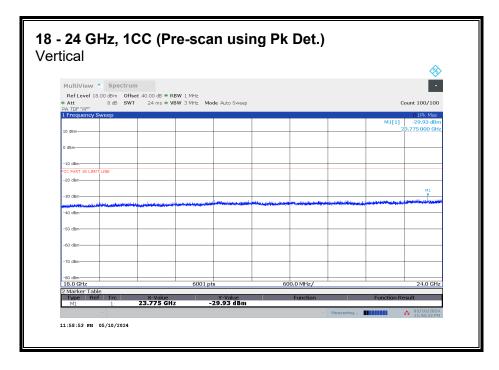


18 - 24 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
23.774	3.3	Н	-40.25	-13	-27.25
23.774	3.3	V	-33.39	-13	-20.39

8.4.14. RSE n258 SB2 24 – 24.75 GHz

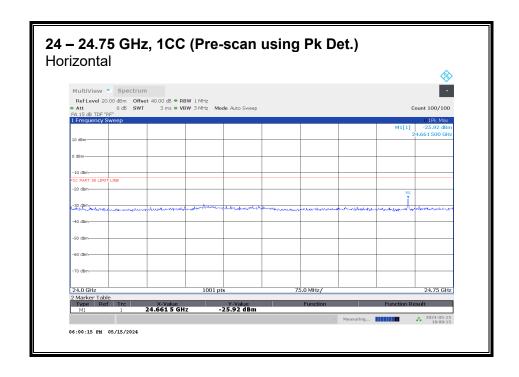


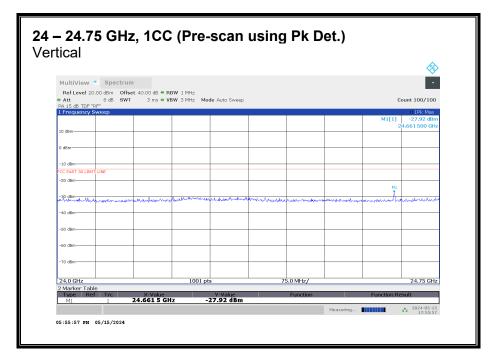

24 - 24.75 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.661	3.3	Н	-32.65	-13	-19.65
24.661	3.3	V	-32.66	-13	-19.66

24 - 24.75 GHz n258 SB2, 2CC

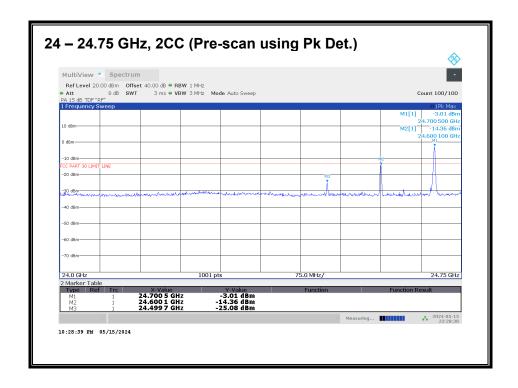


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.699	3.3	-18.50	-13	-5.50

24 - 24.75 GHz n258 SB2, 3CC

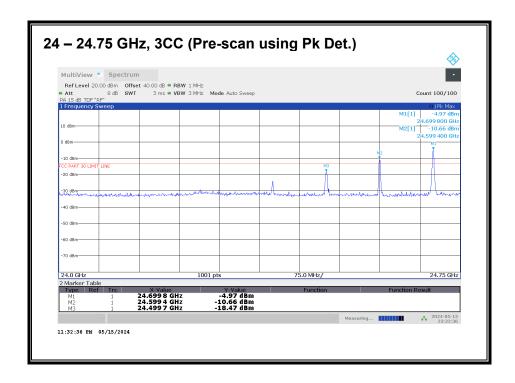


Worst case configuration:

SISO-DUAL QPSK (100 MHz + 100 MHz + 100 MHz) Low CH RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin	
(GHz)	(m)	(dBm)	(dBm)	(dB)	
24.699	3.3	-18.58	-13	-5.58	

24 - 24.75 GHz n258 SB2, 4CC

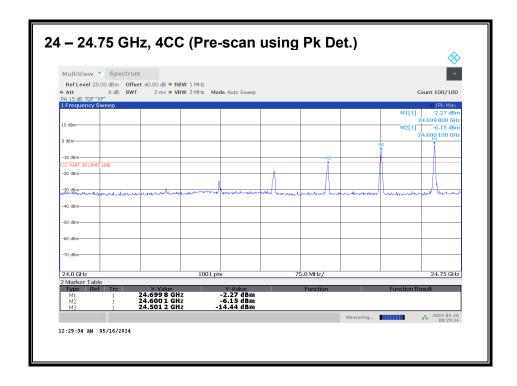

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
24.699	3.3	-18.83	-13	-5.83

8.4.15. RSE n258 SB2 25.25 - 26.5 GHz

Note: 24.75 – 25.25 GHz covered by Fundamental and BE measurements.

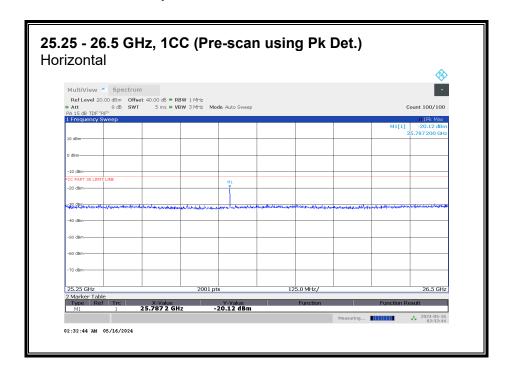


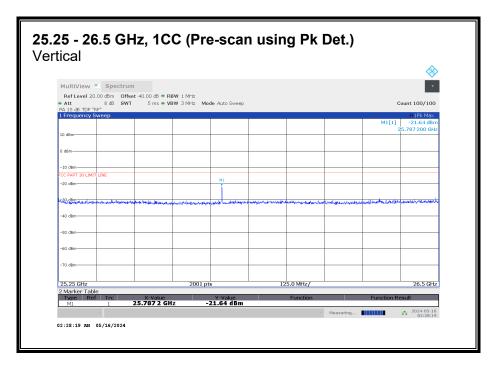

25.25 - 26.5 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.787	3.3	Н	-34.99	-13	-21.99
25.787	3.3	V	-24.69	-13	-11.69

25.25 - 26.5 GHz n258 SB2, 2CC

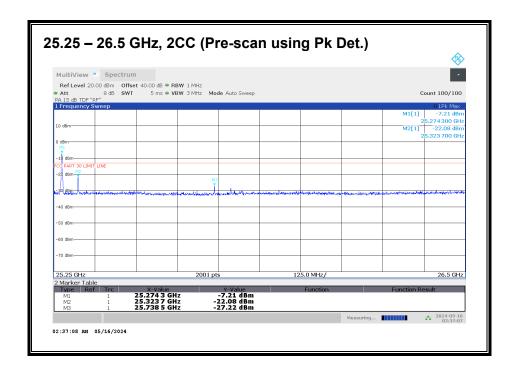


Worst case configuration: SISO-DUAL_QPSK_(50 MHz + 50 MHz)_High CH_RB Offset 1/15(1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.274	3.3	Н	-14.70	-13	-1.70

25.25 - 26.5 GHz n258 SB2, 3CC

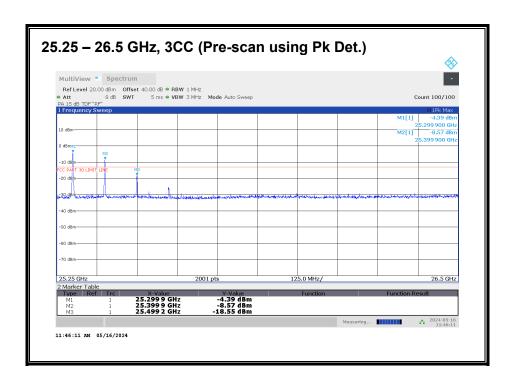


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_High CH_RB Offset 1/32(1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin	
(GHz)	(m)	(dBm)	(dBm)	(dB)	
25.299	3.3	-23.37	-13	-10.37	

25.25 - 26.5 GHz n258 SB2, 4CC

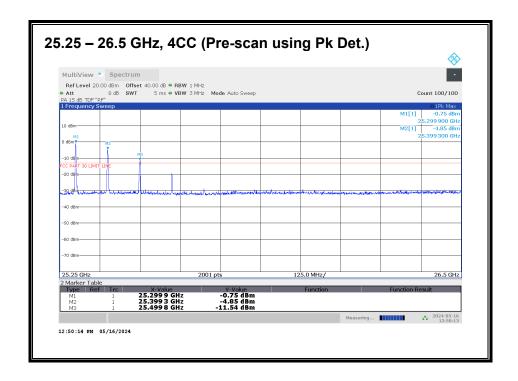


Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_High CH_RB Offset 1/32(1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin	
(GHz)	(m)	(dBm)	(dBm)	(dB)	
25.299	3.3	-20.24	-13	-7.24	

8.4.16. RSE n258 SB2 26.5 - 40 GHz

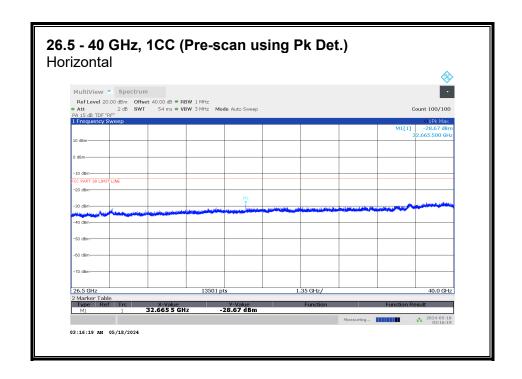


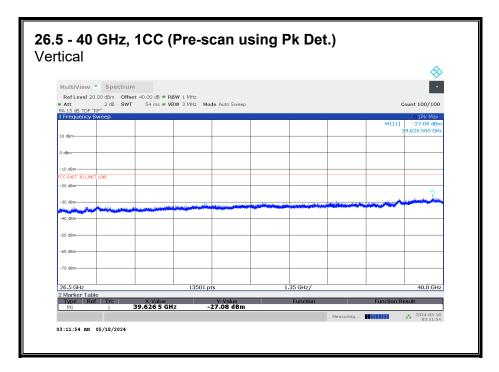


26.5 - 40 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
32.666	3	Н	-33.11	-13	-20.11
32.666	3	V	-40.17	-13	-27.17


8.4.17. RSE n258 SB2 40 - 50 GHz

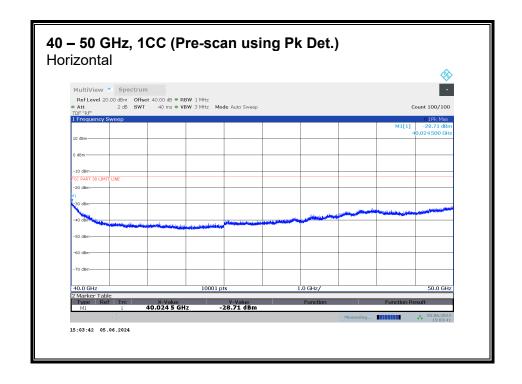


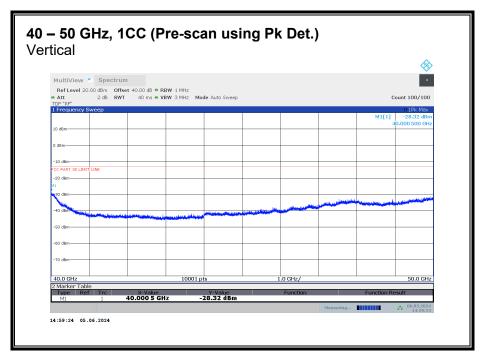

No emission detected using Peak Detection.

8.4.18. RSE n258 SB2 50 - 75 GHz

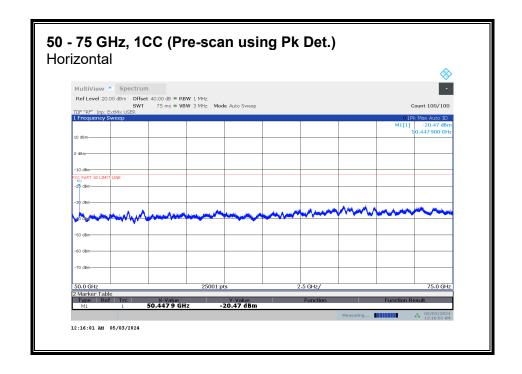


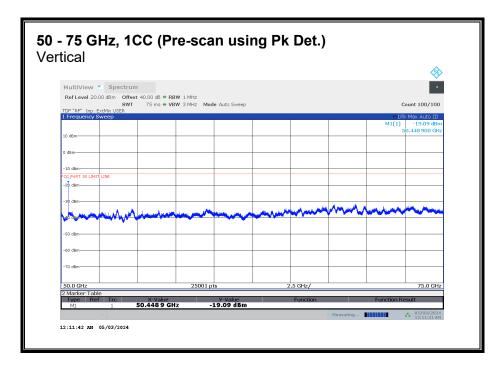


50 - 75 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
50.449	1.5	Н	-31.64	-13	-18.64
50.449	1.5	V	-19.91	-13	-6.91

8.4.19. RSE n258 SB2 75 - 100 GHz

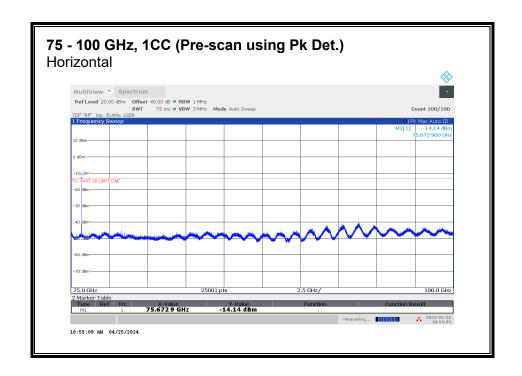


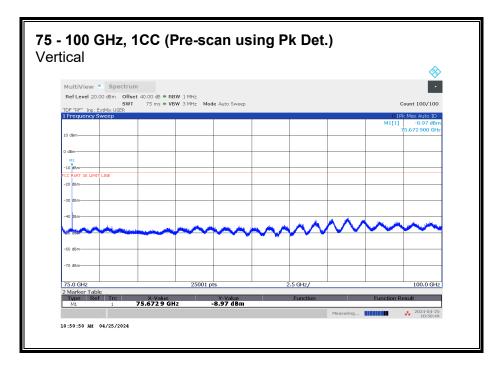

75 - 100 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
75.672	1	Н	-32.19	-13	-19.19
75.672	1	V	-14.59	-13	-1.59

8.4.20. RSE n261 30 - 1000 MHz

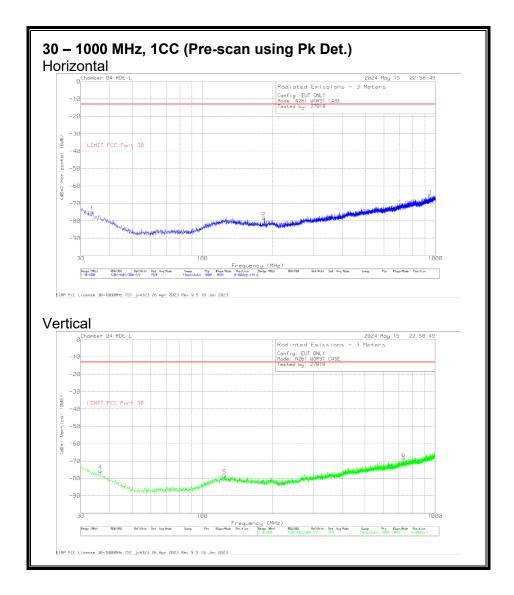


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ANSI ACF (dB/m)	Amp/Cbls (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	33.589	-79.64	Pk	24.1	-31	11.7	-74.84	-13	-61.84	0-360	149	Н
2	183.745	-77.69	Pk	17.1	-29.5	11.7	-78.39	-13	-65.39	0-360	149	Н
3	945.098	-79.69	Pk	28.5	-26.4	11.7	-65.89	-13	-52.89	0-360	149	Н
4	36.402	-78.67	Pk	22.2	-31	11.7	-75.77	-13	-62.77	0-360	149	V
5	124.478	-79.51	Pk	19.7	-30.1	11.7	-78.21	-13	-65.21	0-360	149	V
6	732.183	-79.14	Pk	26.5	-27.5	11.7	-68.44	-13	-55.44	0-360	149	V

Pk - Peak detector

8.4.21. RSE n261 1 - 18 GHz

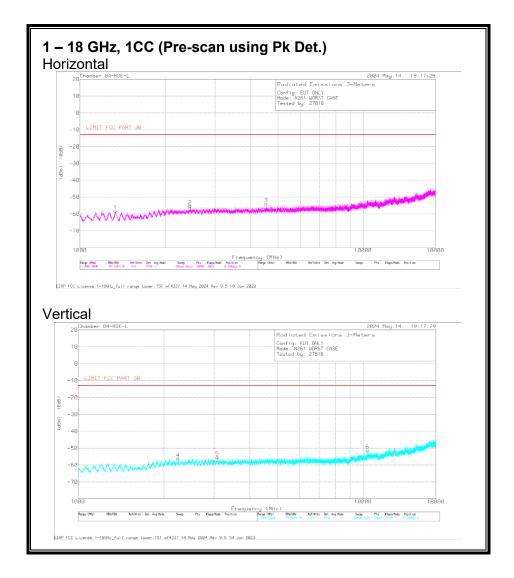



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	FCC Part 30 TRP Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1334.917	-46.84	Pk	28.4	-51.3	11.7	-58.04	-13	-45.04	0-360	399	Н
2	2451.873	-49.02	Pk	32.3	-50.2	11.7	-55.22	-13	-42.22	0-360	399	Н
3	4547.229	-51.16	Pk	34.2	-48.6	11.7	-53.86	-13	-40.86	0-360	399	Н
4	2243.613	-48.36	Pk	31.7	-51.1	11.7	-56.06	-13	-43.06	0-360	299	V
5	3084.305	-50.57	Pk	33	-49.4	11.7	-55.27	-13	-42.27	0-360	399	V
6	10364.924	-59.57	Pk	37.8	-41.1	11.7	-51.17	-13	-38.17	0-360	399	V

Pk - Peak detector

8.4.22. RSE n261 18 - 26.5 GHz

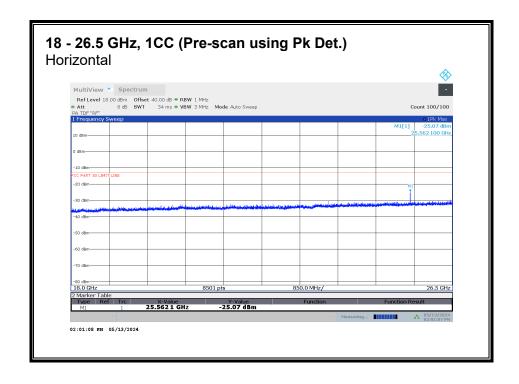

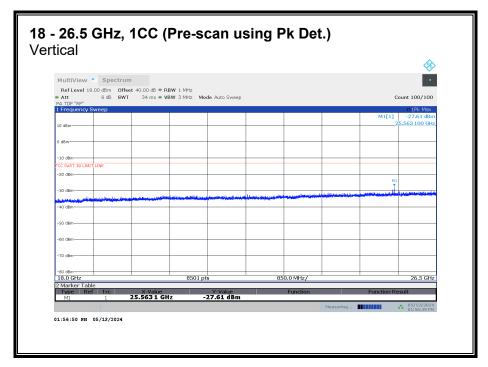



18 - 26.5 GHz, n261 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.563	3.3	Н	-32.00	-13	-19.00
25.563	3.3	V	-39.06	-13	-26.06

8.4.23. RSE n261 26.5 - 27.5 GHz

Note: 27.5 - 28.35 GHz covered by Fundamental and BE measurements.

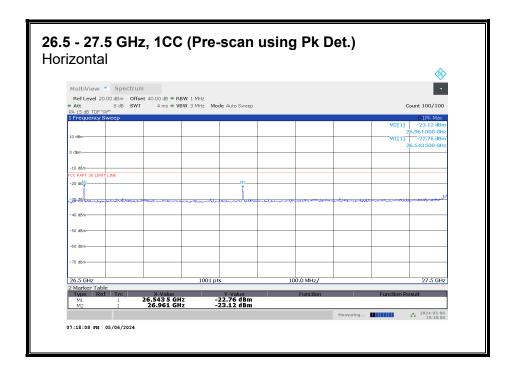


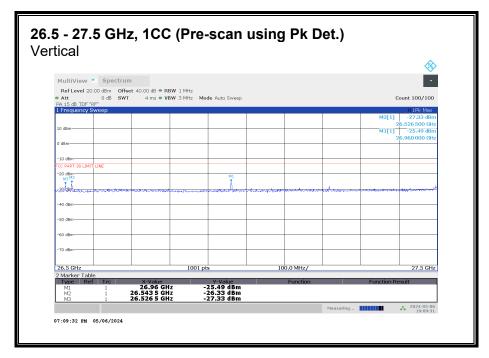

26.5 - 27.5 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
26.543	3	Н	-26.41	-13	-13.41
26.543	3	V	-32.50	-13	-19.50
26.961	3	Н	-27.23	-13	-14.23
26.961	3	V	-32.82	-13	-19.82
26.526	3	Н	-39.40	-13	-26.40
26.526	3	V	-34.15	-13	-21.15

26.5 - 27.5 GHz n261, 2CC

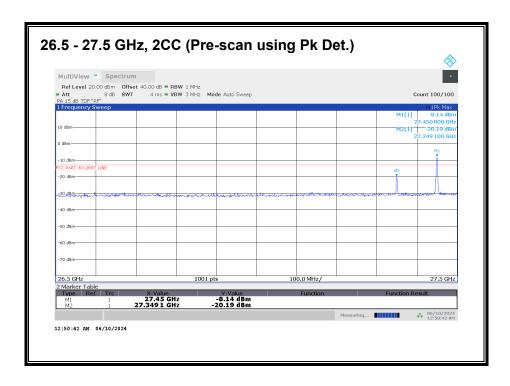


Worst case configuration: SISO-DUAL QPSK (100 MHz + 100 MHz) Low CH RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
27.449	3	٧	-13.74	-13	-0.74

26.5 - 27.5 GHz n261, 3CC

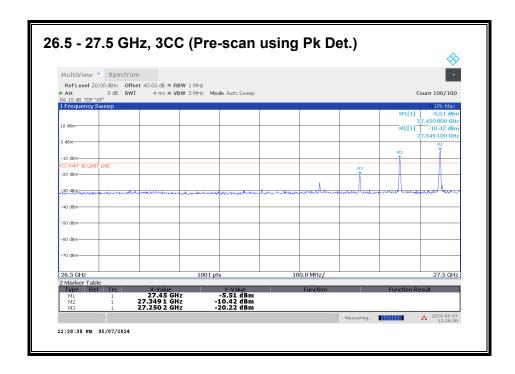


Worst case configuration: SISO-DUAL QPSK (100 MHz + 100 MHz+ 100 MHz) Low CH RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
27.449	3	-23.49	-13	-10.49

26.5 - 27.5 GHz n261, 4CC

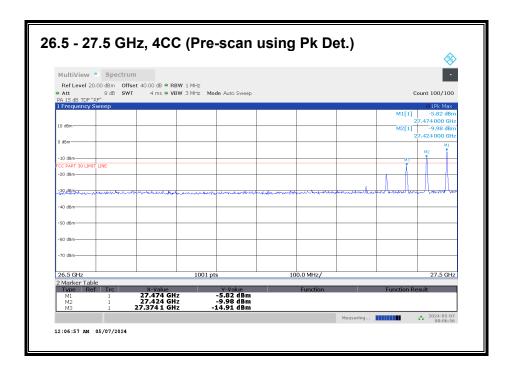


Worst case configuration: SISO-DUAL QPSK (50 MHz + 50 MHz+ 50 MHz+ 50 MHz) Low CH RB Offset 1/15 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

Freq.	Meas. Distance	TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dBm)	(dB)
27.474	3	-22.74	-13	-9.74

8.4.24. RSE n261 28.35 - 29 GHz

Note: 27.5 - 28.35 GHz covered by Fundamental and BE measurements.

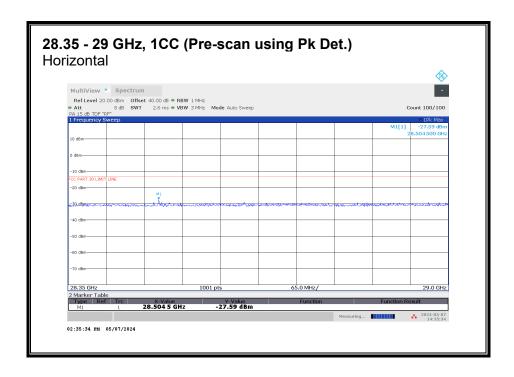


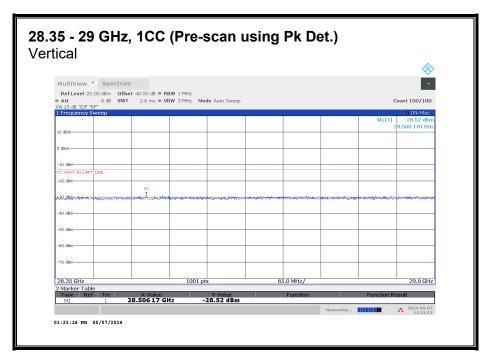

28.35 - 29 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.505	3	Н	-35.95	-13	-22.95
28.505	3	V	-38.26	-13	-25.26

28.35 - 29 GHz n261, 2CC

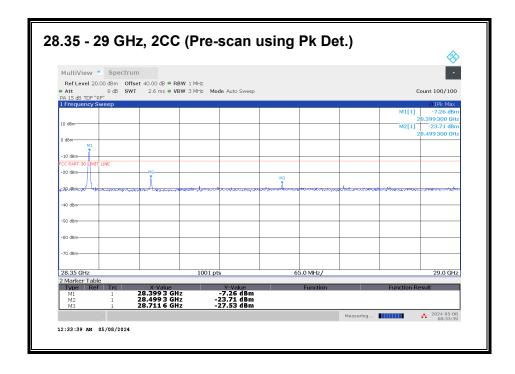


Worst case configuration: SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.399	3	V	-16.99	-13	-3.99

28.35 - 29 GHz n261, 3CC

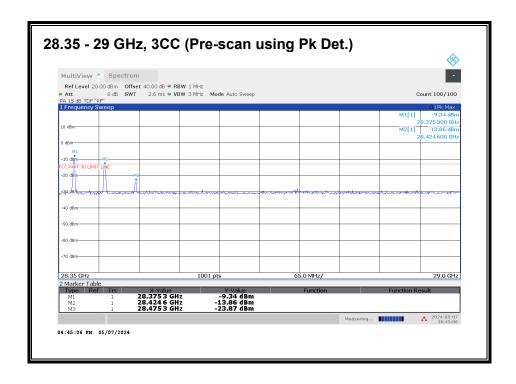


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.374	3	V	-14.43	-13	-1.43

28.35 - 29 GHz n261, 4CC

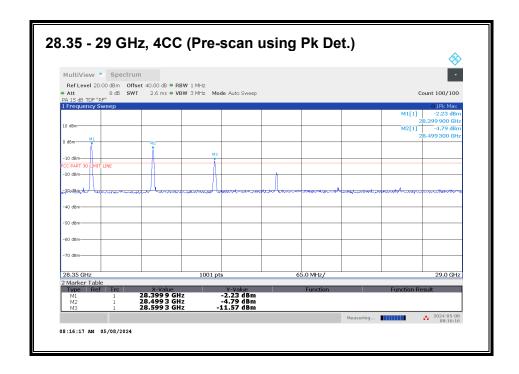


Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz+ 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.399	3	٧	-14.15	-13	-1.15


8.4.25. RSE n261 29 - 40 GHz

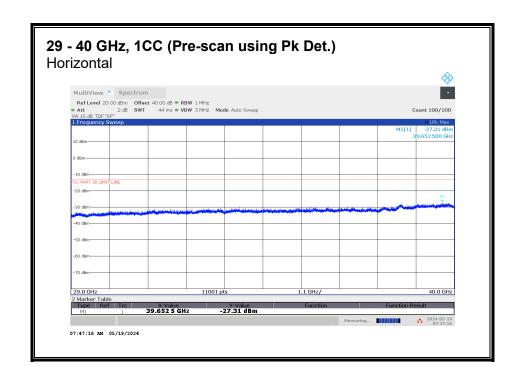


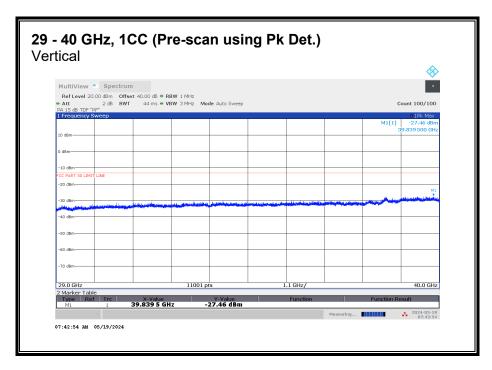

No emission detected using Peak Detection.


8.4.26. RSE n261 40 - 50 GHz

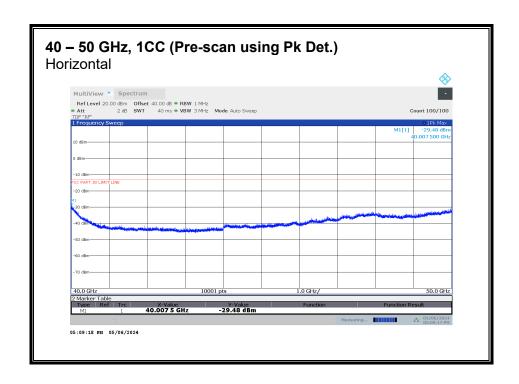


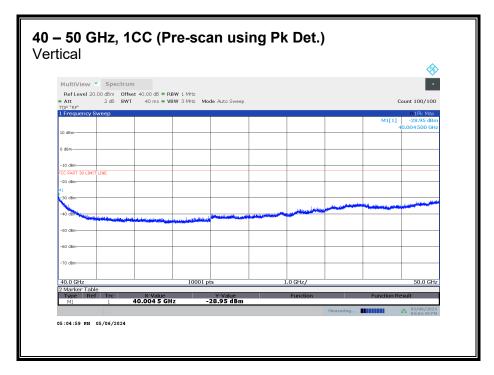

No emission detected using Peak Detection.

8.4.27. RSE n261 50 - 75 GHz

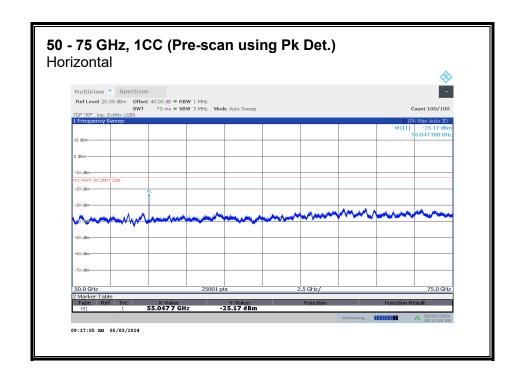


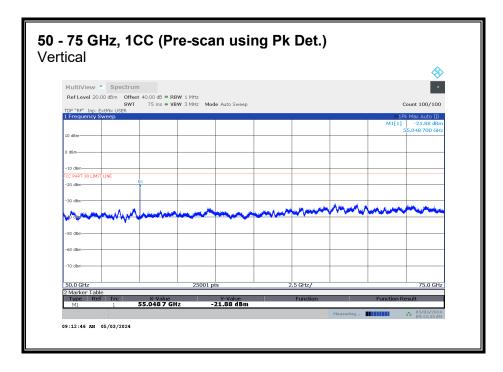


50 - 75 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
55.048	1.5	Н	-43.29	-13	-30.29
55.048	1.5	V	-28.39	-13	-15.39

8.4.28. RSE n261 75 - 100 GHz

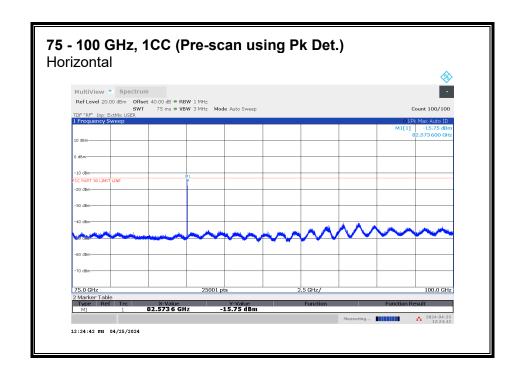

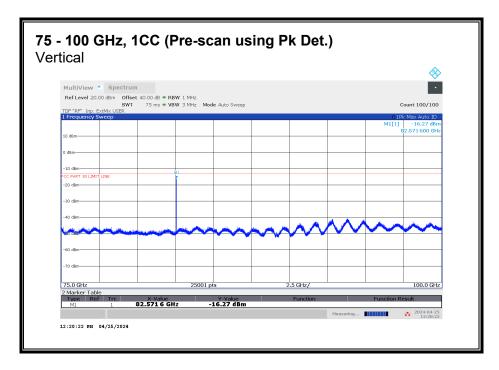

75 - 100 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
82.572	1	Н	-29.99	-13	-16.99
82.572	1	V	-19.83	-13	-6.83