



TEST REPORT

Report Number: 14982436-E4V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S. A

Model : A3083 (Parent Model)
A3292, A3293, A3294 (Variant Models)

Brand : APPLE

FCC ID : BCG-E8666A (Parent Model)
BCG-E8667A, BCG-E8668A, BCG-E8683A
(Variant Models)

IC : 579C-E8666A (Parent Model)
579C-E8667A, 579C-E8668A, 579C-E8683A
(Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2024/07/08

Prepared by:
UL VERIFICATION INC.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2024/06/29	Initial issue	Chin Pang
V2	2024/07/08	Address TCB questions section 3, 6.3 and 9	David Collins

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
5.4. SAMPLE CALCULATION	9
6. EQUIPMENT UNDER TEST	10
6.1. EUT DESCRIPTION	10
6.2. MAXIMUM OUTPUT POWER.....	10
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.4. SOFTWARE AND FIRMWARE.....	11
6.5. WORST-CASE CONFIGURATION AND MODE.....	11
6.6. DESCRIPTION OF TEST SETUP.....	13
7. MEASUREMENT METHOD.....	16
8. TEST AND MEASUREMENT EQUIPMENT	17
9. ANTENNA PORT TEST RESULTS	19
9.1. ON TIME AND DUTY CYCLE.....	19
9.2. 99% BANDWIDTH.....	20
9.2.1. 802.11b MODE 1TX.....	21
9.2.2. 802.11n HT20 MODE	22
9.2.3. 802.11n HT20 CDD MODE 2TX	24
9.2.4. 802.11be EHT20 MODE	25
9.2.5. 802.11be EHT20 OFDMA MODE 2TX.....	29
9.3. 6dB BANDWIDTH.....	32
9.3.1. 802.11b MODE 1TX.....	33
9.3.2. 802.11be EHT20 MODE	34
9.3.3. 802.11be EHT20 OFDMA MODE 2TX.....	38
9.4. OUTPUT POWER.....	40
9.4.1. 802.11b MODE 1TX.....	42
9.4.2. 802.11n HT20 MODE	44
9.4.3. 802.11n HT20 CDD MODE 2TX	46
9.4.4. 802.11be EHT20 MODE	47
9.4.5. 802.11be EHT20 OFDMA MODE 2TX.....	55

9.5. POWER SPECTRAL DENSITY	59
9.5.1. 802.11b MODE 1TX.....	60
9.5.2. 802.11n HT20 MODE	62
9.5.3. 802.11n HT20 CDD MODE 2TX	64
9.5.4. 802.11be EHT20 MODE	65
9.5.5. 802.11be EHT20 OFDMA MODE 2TX.....	71
9.6. CONDUCTED SPURIOUS EMISSIONS.....	75
9.6.1. 802.11b MODE 1TX.....	76
9.6.2. 802.11n HT20 SISO MODE	80
9.6.3. 802.11n HT20 CDD MODE 2TX	86
9.6.4. 802.11be EHT20 MODE	94
9.6.5. 802.11be EHT20 OFDMA MODE 2TX.....	112
10. RADIATED TEST RESULTS.....	132
10.1. TRANSMITTER ABOVE 1 GHz.....	134
10.1.1. 802.11b Mode 1TX ANT 4 IN THE 2.4 GHz BAND	134
10.1.2. 802.11b ANT 4, HARMONICS AND SPURIOUS EMISSIONS.....	142
10.1.3. 802.11b Mode 1TX ANT 3 IN THE 2.4 GHz BAND	148
10.1.4. 802.11b ANT 3 HARMONICS AND SPURIOUS EMISSIONS.....	156
10.1.5. 802.11n HT20 SISO MODE).....	162
10.1.6. 802.11n HT20 MODE CDD MODE 2TX.....	194
10.1.7. 802.11n HT20 CDD MODE 2TX HARMONICS AND SPURIOUS EMISSIONS	212
10.1.8. 802.11be EHT20 SISO MODE.....	218
10.1.9. 802.11be EHT20 OFDMA MODE IN THE 2.4 GHz BAND	266
10.1.10. 802.11be EHT20 26-Tones HARMONICS AND SPURIOUS EMISSIONS.....	290
10.1.11. 802.11be EHT20, SU 2TX HARMONICS AND SPURIOUS EMISSIONS	296
10.2. WORST CASE BELOW 1 GHz	302
10.3. WORST CASE 18-26 GHz	304
11. AC POWER LINE CONDUCTED EMISSIONS.....	306
11.1. AC POWER LINE WITH AC/DC ADAPTER	307
11.2. AC POWER LINE WITH LAPTOP.....	309
12. SETUP PHOTOS.....	311

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION : SMARTPHONE

MODEL : A3083 (Parent Model)
A3292, A3293, A3294 (Variant Models)

BRAND : APPLE

FCC ID : BCG-E8666A (Parent Model)
BCG-E8667A, BCG-E8668A, BCG-E8683A (Variant Models)

IC : 579C-E8666A (Parent Model)
579C-E8667A, 579C-E8668A, 579C-E8683A
(Variant Models)

SERIAL NUMBER: C07GYF0008T0000FDV, C07H4F0015B0000FDT,
QKPYHGC7L, XK3DWHQHQQW

SAMPLE RECEIPT DATE: 2023/12/19.

DATE TESTED: 2024/01/03 - 2024/07/03.

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 3	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Inc. is tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Inc.. and all revisions are noted in the revisions section. Any alteration of this document not carried out by UL Verification Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.
Approved & Released For

UL Verification Inc. By:



Chin Pang
Senior Lab Engineer
Consumer Technology Division
UL Verification Inc.

Prepared By:



Tony Li
Lead Test Engineer
Consumer Technology Division
UL Verification Inc.

2. TEST RESULTS SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power (Average)	Complies	Per ANSI C63.10, Section 11.9.2.3.2..
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with;

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15
- FCC KDB 558074 D01 v05r02 15.247 Meas Guidance
- ANSI C63.10-2013
- RSS-GEN Issue 5 + A1 + A2
- KDB 414788 D01 Radiated Test Site v01r01
- RSS-247 Issue 3

4. FACILITIES AND ACCREDITATION

UL Verification Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94
Power Spectral Density	2.466
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 (Peak), 1.3 (Ave)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.2%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable

Loss (dB) – Preamp Gain (dB)

$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) +

LISN Insertion Loss.

$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
1Tx			
2412 - 2472	802.11b	21.91	155.24
	802.11g	Covered by 802.11n HT20 1TX	
	802.11n HT20	21.95	156.68
	802.11ax HE20	Covered by 802.11be EHT20 1TX	
	802.11be EHT20	21.90	154.88

2Tx			
2412 - 2472	802.11n HT20 CDD	24.99	315.50
	802.11g SDM/STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ax HE20	Covered by 802.11be EHT20 OFDMA	
	802.11be EHT20 OFDMA	25.00	316.23

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type (IFA), as provided by the manufacturer' are as follows:

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	0.0	-2.1

The SMA Cable Loss as provided by the manufacturer' are as follows:

Frequency Range (GHz)	ANT 4 (dB)	ANT 3 (dB)
2.4	2.15	2.10

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware and software installed during testing was 27_20_111_38.

6.5. WORST-CASE CONFIGURATION AND MODE

EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape) and Z (Portrait) on ANT 4, ANT 3, and 2TX. It was determined that Y (Landscape) orientation was worst-case orientation for ANT 3 and X (Flatbed) orientation was the worst-case orientation for ANT4 and 2TX.

With same power on Full RU and SU higher data rate, investigation was performed on both bandedge to determine the worst case, and SU mode was determined to be the worst case.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For radiated harmonics spurious below 1GHz, 1-18GHz L/M/H channels, 18-26GHz, and power line conducted emissions were performed with the EUT set at the 2TX CDD mode among the CDD/SDM modes and 2TX EHT mode with power setting equal or higher than SISO modes as worst-case scenario. G mode covered by HT20 mode since it has the same power as HT20.

Below 30MHz, 30-1000MHz emissions spurious tests were performed with EUT connected to AC power adapter and set at X orientation as the worst case; and for above 1GHz tests, the worst-case configuration reported was with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

The modulation and bandwidth of 802.11ax and 802.11be modes are similar, and the target power of 802.11ax mode is equal to or lower than that of 802.11be mode. The data rate of 802.11be mode is higher than 802.11ax mode, therefore, 802.11be mode is performed in the test to represent worst-case reporting.

The output power and psd for the 802.11be mode were investigated between all different tones, and we found that SU mode had the highest output power and RU26 had the highest PSD readings. And after investigation, antenna port conducted tests were performed on both SU and lowest tones; radiated spurious emission and radiated band edge tests were performed on SU and lowest tones. Please see worst case summary table below.

WIFI DTS 2.4GHz - 802.11be					
BW (MHz)	Tone (T)	RU Index	RU Index from Chipset support	Worst Case Tone (UNII-1)	
				Power	PSD
20	26	0 ~ 8	0 ~ 8		X
	52	37 ~ 40	37 ~ 40		
	52 + 26	70 ~ 81	70, 71, 72		
	106	53 ~ 54	53 ~ 54		
	106 + 26	82 ~ 89	82, 83		
	242	61	61		
	SU	--	--	X	

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. For radiated bandedge, following are the worst-case data rates set for test:

802.11b mode : 1 Mbps
 802.11n HT20 mode : MCS7
 802.11be EHT20mode: MCS9
 802.11be EHT RU26 and SU, MCS9



Note: In the Radiated Plots and emissions data, ANT1=ANT4 and ANT2=ANT 3.



6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Macbook Pro	C02GD2Y5ML7H		BCGA2251
Laptop AC/DC adapter		Liteon Technology	A2166	C4H021107A1PM0WA3		DoC
EUT AC/DC adapter		Apple	A2305	HHY24471ACC1PW9AV		DoC
Conducted Switch Box		UL	n/a	208281		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.75	To spectrum Analyzer
2	Antenna	2	SMA	Un-shielded	0.2	To Conducted Switch Box
3	USB-C	1	USB-C	Shielded	1.0	N/A
4	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

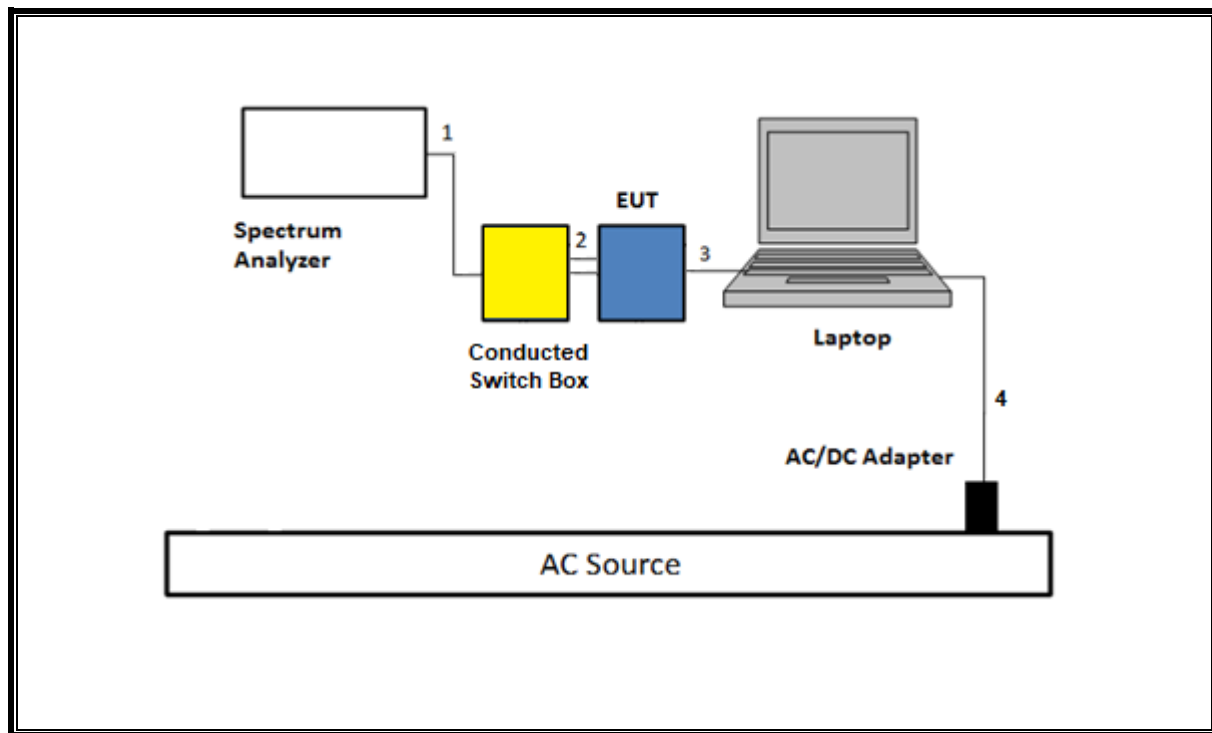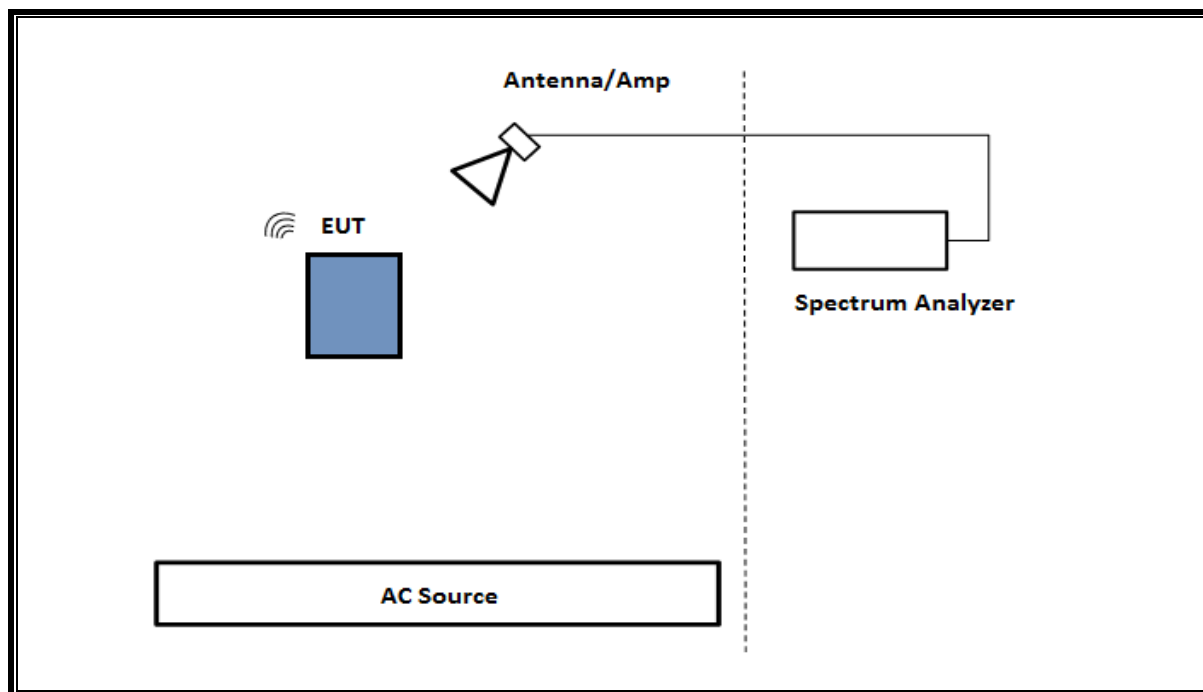SETUP DIAGRAM FOR CONDUCTED TESTS**SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz (1 to 26GHz)**

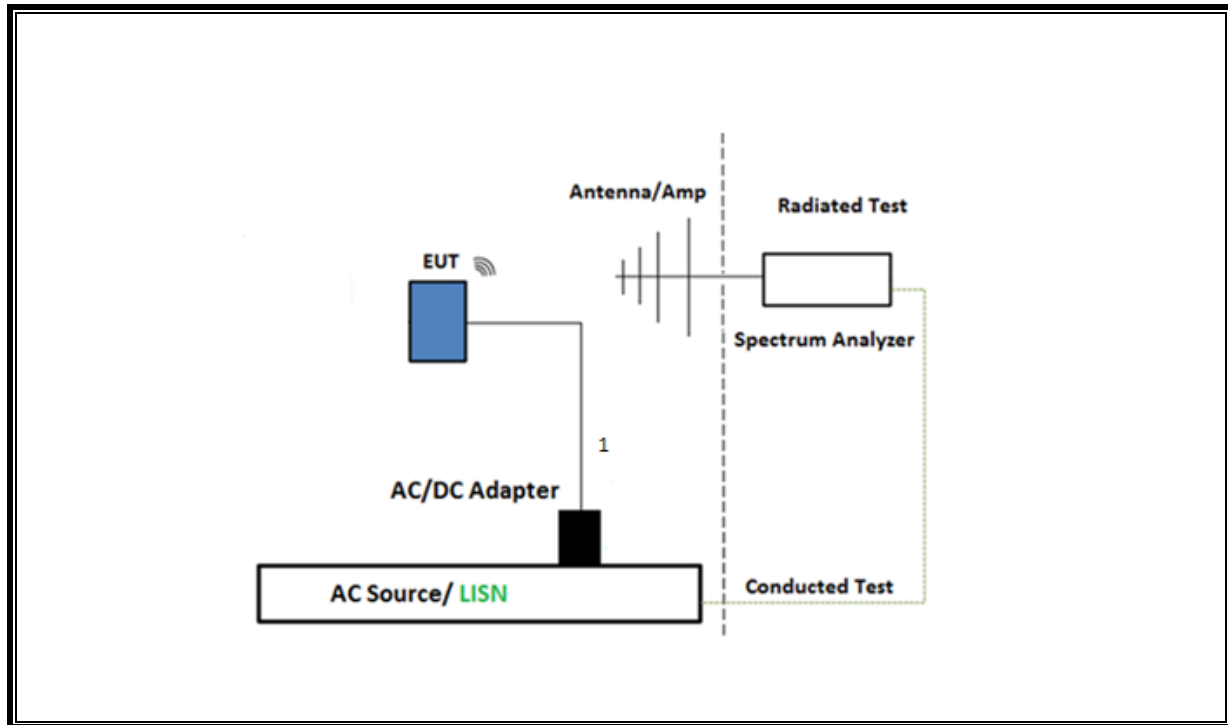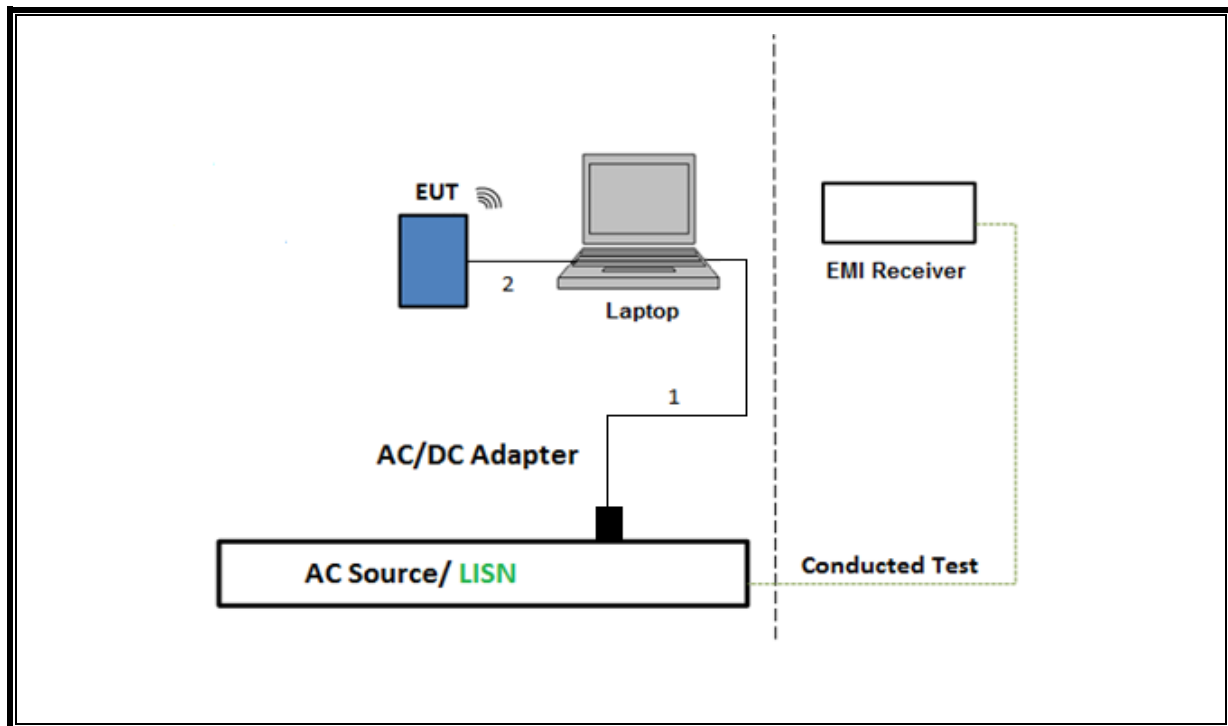SETUP DIAGRAM FOR 30-1000MHz and AC LINE CONDUCTED TEST**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

7. MEASUREMENT METHOD

Test Item	Test Method
6 dB BW	ANSI C63.10 Subclause -11.8.1 RBW $\geq$ DTS BW
99% BW	ANSI C63.10-2013, Subclause 6.9.3.
Output Power	ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM G (Measurement using an RF average-reading power meter)
PSD	ANSI C63.10 Subclause -11.10.3 Method AVGPSD-1
Radiated emissions non-restricted frequency bands	ANSI C63.10 Subclause -11.11 & Clause 13
Radiated emissions restricted frequency bands	ANSI C63.10 Subclause -11.12.1 & Clause 13
Conducted emissions in restricted frequency bands	ANSI C63.10 Subclause -11.12.2
Band-edge	ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection
Band-edge	ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power
Radiated Spurious Emissions Below 30MHz	ANSI C63.10-2013 Subclause 6.4 & Clause 13
AC Power Line Conducted Emissions	ANSI C63.10-2013, Subclause 6.2

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
*Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200896	2024/04/24	2023/04/24
*RF Filter Box, 1-18GHz	UL-FR1	NA	169334	2024/05/31	2023/05/31
EMI Test Receiver	Rohde & Schwarz	ESW44	169935	2025/02/28	2024/02/28
*Antenna, Horn 1-18GHz	ETS-Lindgren	3117	206808	2024/03/31	2023/03/31
*RF Filter Box, 1-18GHz	UL-FR1	NA	PRE0183207	2024/03/31	2023/03/31
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	216812	2025/01/30	2024/01/30
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80430	2024/08/31	2023/08/31
EMI Test Receiver	Rohde & Schwarz	ESW44	169936	2025/02/28	2024/02/28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	230299	2025/01/31	2024/01/31
EMI Test Receiver	Rohde & Schwarz	ESW44	170063	2024/11/30	2023/11/30
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	225575	2025/04/27	2024/04/27
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	222740	2024/08/31	2023/08/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	230547	2025/02/28	2024/02/28
*RF Filter Box, 1-18GHz	UL-FR1	N/A	171389	2024/05/31	2023/05/31
Antenna, BroadBand Hybrid, 30MHz to 3GHz	SUNOL SCIENCES CORP.	JB3	230634	2025/01/31	2024/01/31
Link File, @3m, 9kHz-1000MHz Hybrid Path Loss	UL-FR1	Port 0 Factors	232001	2025/02/28	2024/02/28
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	81139	2024/08/31	2023/08/31
Link File, RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	221832	2025/03/31	2024/03/31
*EMI TEST RECEIVER	Rohde & Schwarz	ESW44	226079	2024/05/01	2023/05/01
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170013	2024/07/31	2023/07/31
Antenna, Passive Loop 100kHz to 30MHz	ELECTRO-METRICS	EM-6872	170015	2024/07/31	2023/07/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90731	2025/01/31	2024/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	80120	2025/01/31	2024/01/31
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90719	2025/01/31	2024/01/31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2025/01/31	2024/01/31
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	178557	Verified Before Use	
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	178558	Verified Before Use	
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	80397	2025/01/31	2024/01/31
Spectrum Analyzer, PXA, 3Hz to 50GHz w/Ext. Mixer	Keysight Technologies Inc	N9030A	80400	2025/02/02	2024/02/02
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	125178	2025/01/31	2024/01/31
*Conducted Switch Box	N/A	CSB	208281	2024/04/30	2023/04/30
Conducted Switch Box	N/A	CSB	208281	2025/05/08	2024/05/08

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200784	2025/01/31	2024/01/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	230548	2025/02/28	2024/02/28
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	225079	2025/04/30	2024/04/30
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	206807	2025/02/28	2024/02/28
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201501	2024/11/30	2023/11/30
RF Filter Box, 1-18GHz, 8 Port	UL-FR1	SAC 8 port rf box 1	197920	2025/03/31	2024/03/31

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	93091	2025/02/28	2024/02/28
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175765	2025/01/31	2024/01/31
Transient Limiter	TE	TBFL1	207996	2024/08/31	2023/08/31
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023		
Conducted Software	UL	UL EMC	2023.2.23		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Mar 3, 2023		

*Testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.


Test Engineer:	19336
Test Date:	02/20/2024

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b	12.410	12.440	0.998	99.76%	0.00	0.010
802.11n HT20 MCS0	1.920	1.945	0.987	98.71%	0.00	0.010
802.11n HT20 MCS7	0.228	0.253	0.900	90.04%	0.46	4.390
802.11be EHT20 RU26 MCS0	3.992	4.041	0.988	98.79%	0.00	0.010
802.11be EHT20 RU26 MCS9	0.348	0.399	0.872	87.22%	0.59	2.874
802.11be EHT20 SU MCS0	1.487	1.513	0.983	98.28%	0.00	0.010
802.11be EHT20 SU MCS9	0.182	0.208	0.877	87.68%	0.57	5.488

Note: Duty cycle 2TX is the same as 1TX.

DUTY CYCLE PLOTS

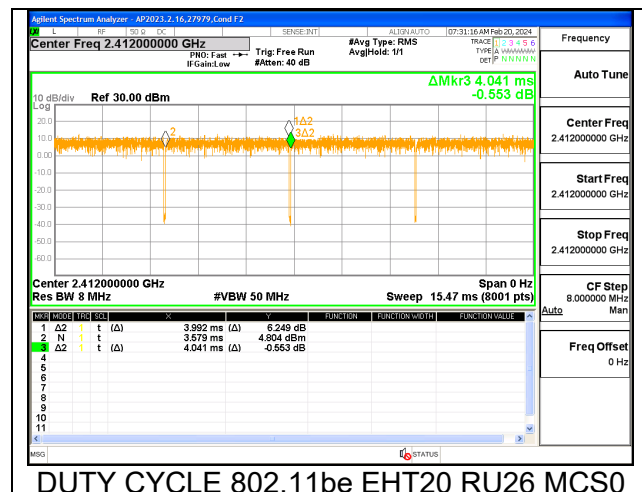

9.2. 99% BANDWIDTH**LIMITS**


None; for reporting purposes only.

RESULTS


Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. 802.11b MODE 1TX**1TX ANT 4 MODE**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	13.138
Mid 6	2437	13.106
High 11	2462	13.187
High 12	2467	13.139
High 13	2472	13.070

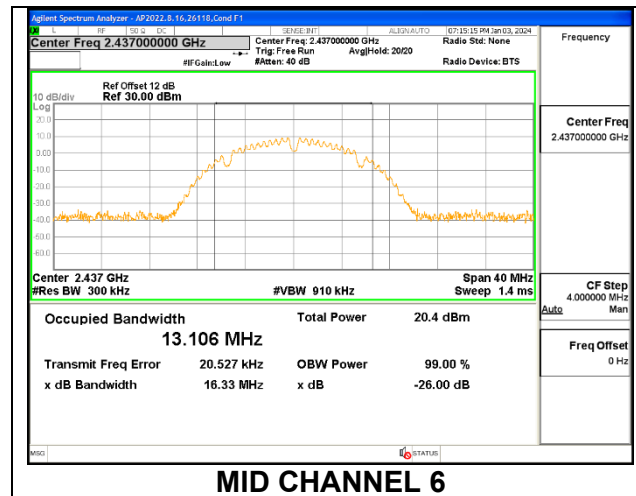**1TX ANT 3 MODE**


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	13.153
Mid 6	2437	13.141
High 11	2462	13.070
High 12	2467	13.087
High 13	2472	13.095

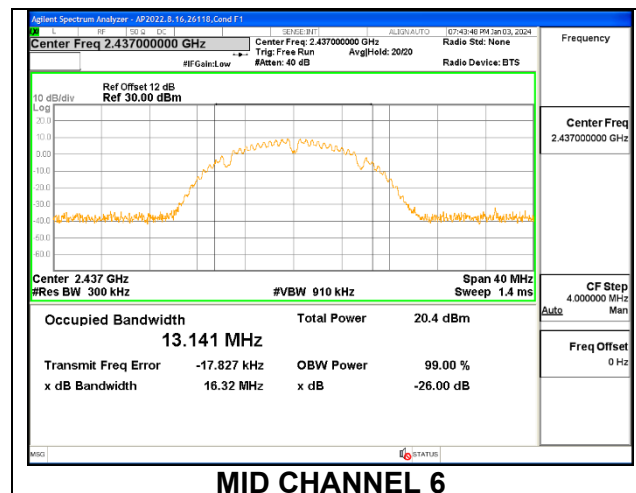

9.2.2. 802.11n HT20 MODE


1TX ANT 4 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	17.836
Low 2	2417	17.874
Low 3	2422	17.819
Mid 6	2437	17.841
High 9	2452	17.867
High 10	2457	17.887
High 11	2462	17.914
High 12	2467	17.911
High 13	2472	17.843

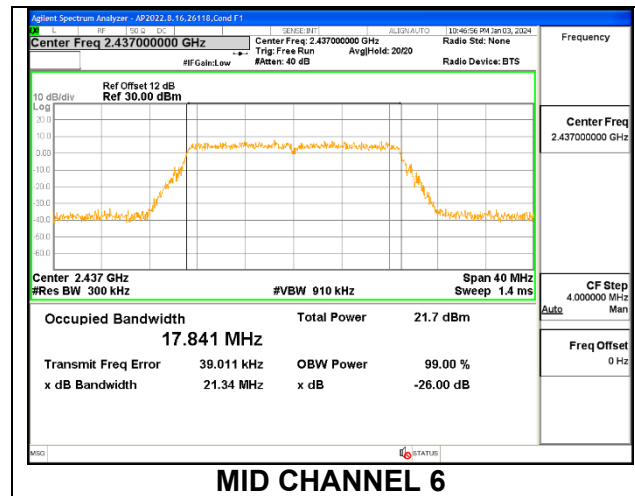

1TX ANT 3 MODE



Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	17.912
Low 2	2417	17.841
Low 3	2422	17.857
Mid 6	2437	17.918
High 9	2452	18.000
High 10	2457	17.924
High 11	2462	17.816
High 12	2467	17.739
High 13	2472	17.766

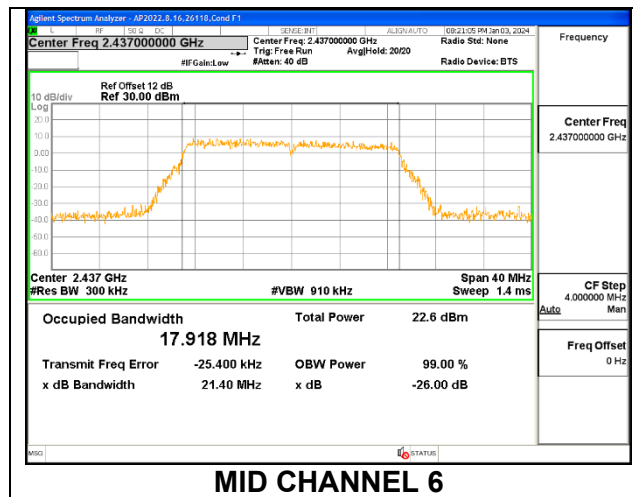

9.2.3. 802.11n HT20 CDD MODE 2TX

ANT 4 + ANT 3 2TX MODE


Channel	Frequency (MHz)	99% Bandwidth (MHz) ANT 4	99% Bandwidth (MHz) ANT 3
Low 1	2412	17.909	17.936
Low 2	2417	17.853	17.814
Low 3	2422	17.858	17.738
Mid 6	2437	17.840	17.962
High 8	2447	17.900	17.910
High 9	2452	17.929	17.926
High 10	2457	17.909	17.902
High 11	2462	17.972	17.778
High 12	2467	17.894	17.858
High 13	2472	17.805	17.754

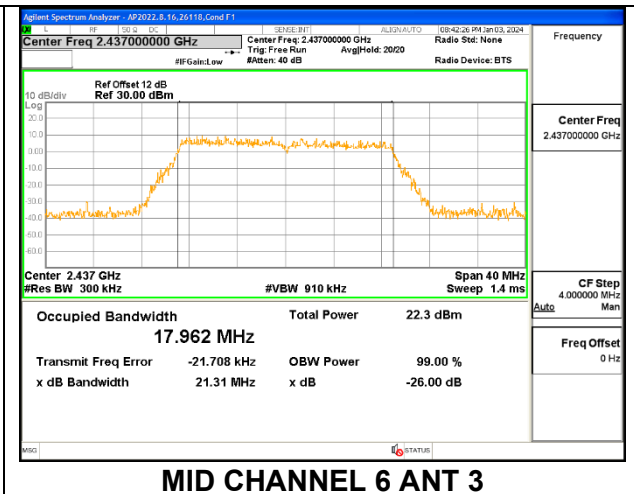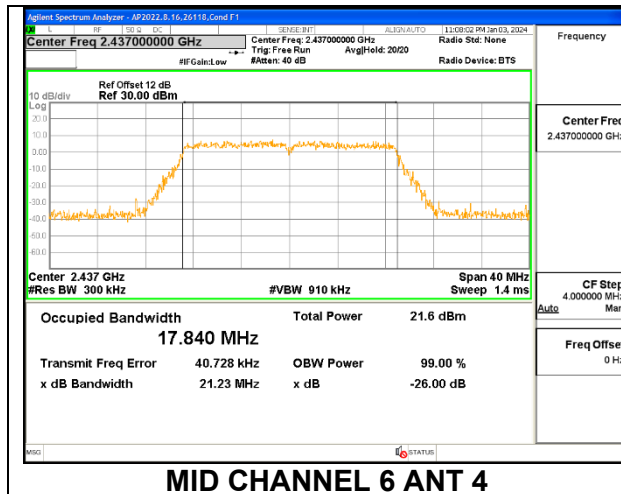

9.2.4. 802.11be EHT20 MODE


ANT 4 SISO MODE: 26-Tones, RU index 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	18.445
Mid 6	2437	18.386
High 11	2462	18.294
High 12	2467	18.364
High 13	2472	18.257

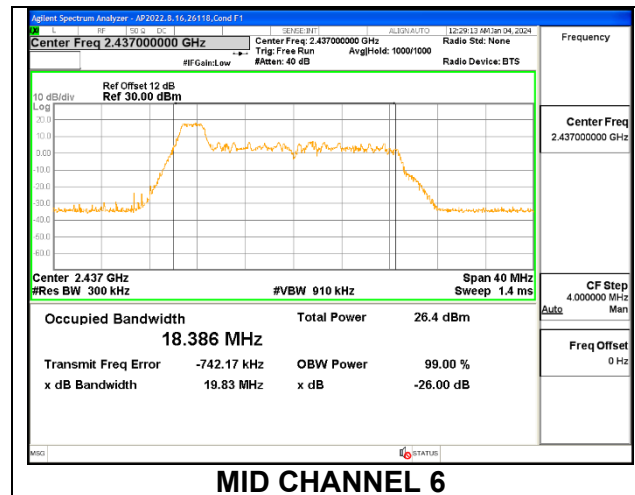


ANT 4 SISO MODE: 26-Tones, RU Index 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	16.865
Mid 6	2437	16.982
High 11	2462	17.010
High 12	2467	16.995
High 13	2472	16.877

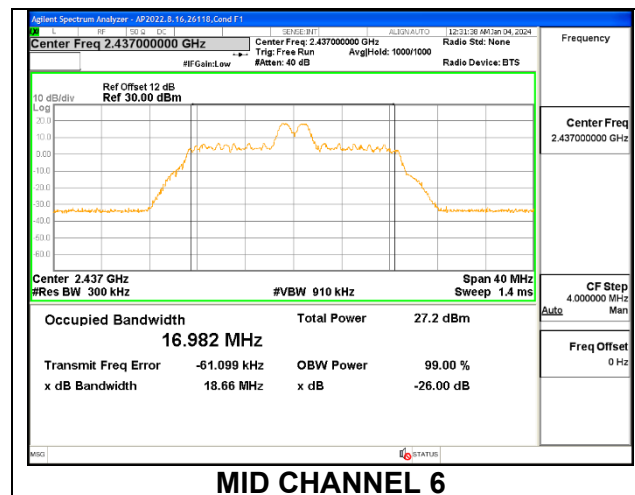


ANT 4 SISO MODE: 26-Tones, RU Index 8

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	18.534
Mid 6	2437	18.566
High 11	2462	18.585
High 12	2467	18.546
High 13	2472	18.541

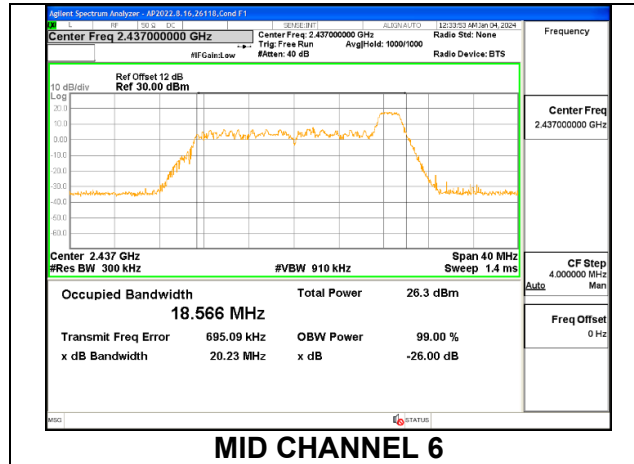
**ANT 4 SISO MODE: SU Mode**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	18.984
Low 2	2417	18.991
Low 3	2422	19.009
Mid 6	2437	18.990
High 9	2452	18.980
High 10	2457	19.001
High 11	2462	19.006
High 12	2467	18.963
High 13	2472	18.890

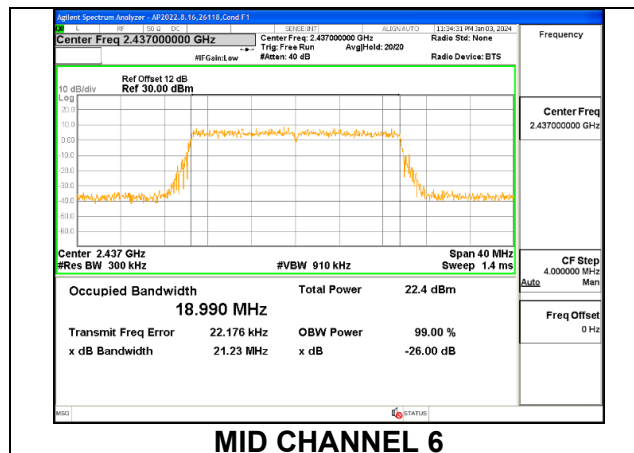


ANT 3 SISO MODE: 26-Tones, RU Index 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	18.426
Mid 6	2437	18.266
High 11	2462	18.354
High 12	2467	18.182
High 13	2472	18.174

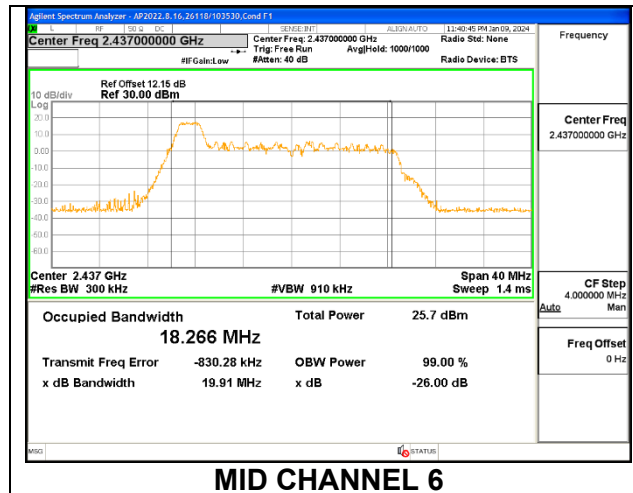
**ANT 3 SISO MODE: 26-Tones, RU Index 4**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	17.049
Mid 6	2437	16.986
High 11	2462	16.772
High 12	2467	16.858
High 13	2472	16.797

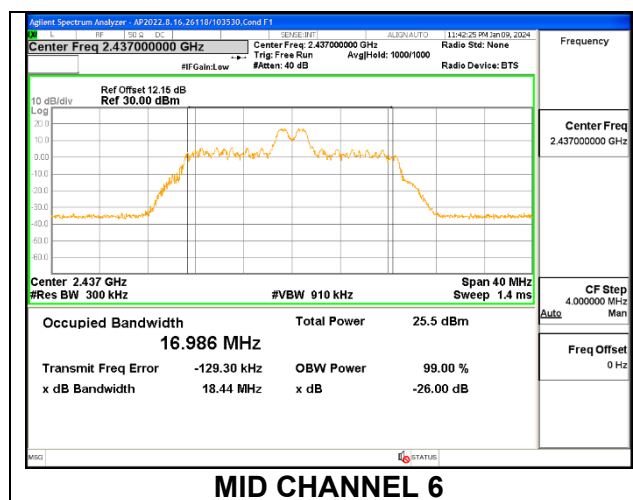


ANT 3 SISO MODE: 26-Tones, RU Index 8

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	18.474
Mid 6	2437	18.625
High 11	2462	18.490
High 12	2467	18.570
High 13	2472	18.616

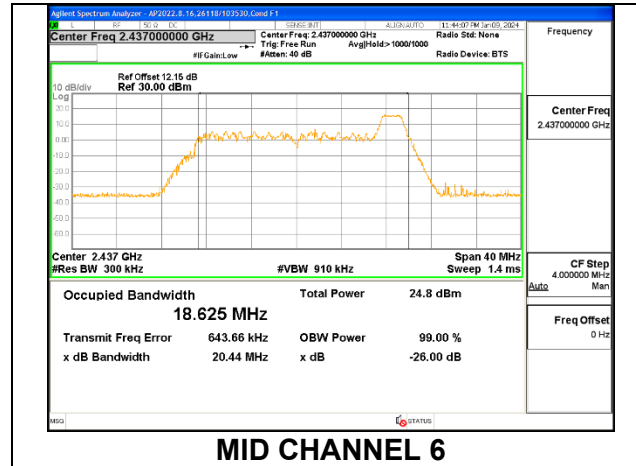**ANT 3 SISO MODE: SU Mode**



Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	19.035
Low 2	2417	18.996
Low 3	2422	18.953
Mid 6	2437	19.015
High 9	2452	18.963
High 10	2457	19.024
High 11	2462	18.986
High 12	2467	18.975
High 13	2472	18.908

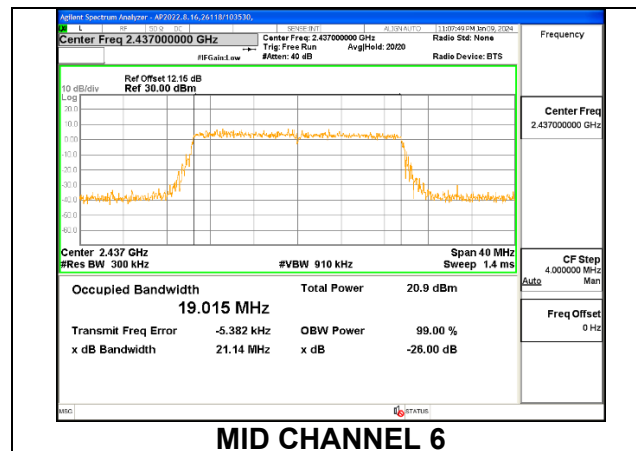

9.2.5. 802.11be EHT20 OFDMA MODE 2TX



ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)	99% Bandwidth (MHz)
		ANT 4	ANT 3
Low 1	2412	18.356	18.415
Mid 6	2437	18.260	18.240
High 11	2462	18.156	18.270
High 12	2467	18.352	18.248
High 13	2472	18.206	18.002

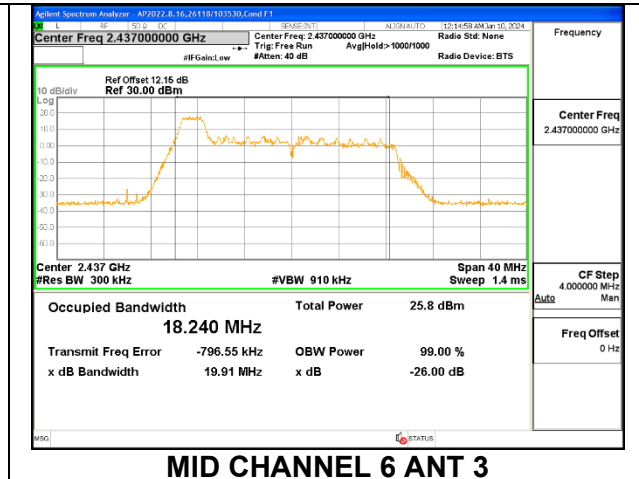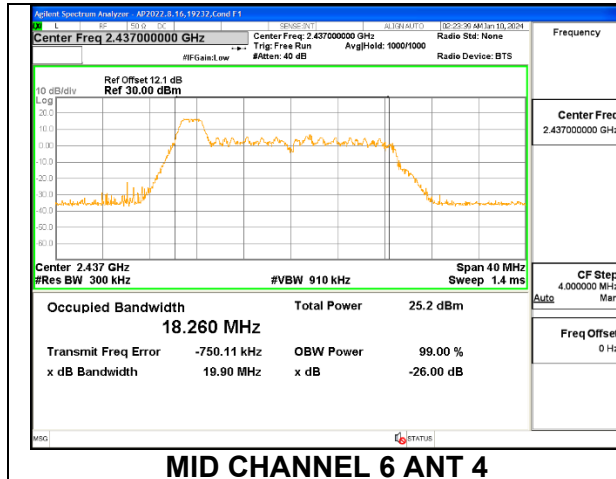


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)	99% Bandwidth (MHz)
		ANT 4	ANT 3
Low 1	2412	16.855	16.674
Mid 6	2437	16.928	16.849
High 11	2462	16.890	16.710
High 12	2467	16.821	16.734
High 13	2472	16.774	16.700

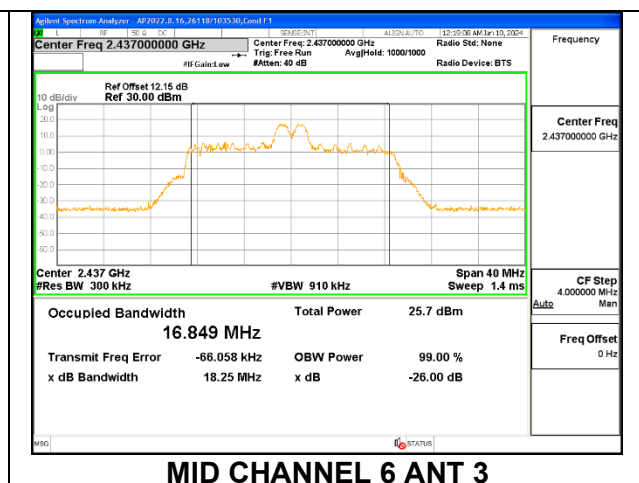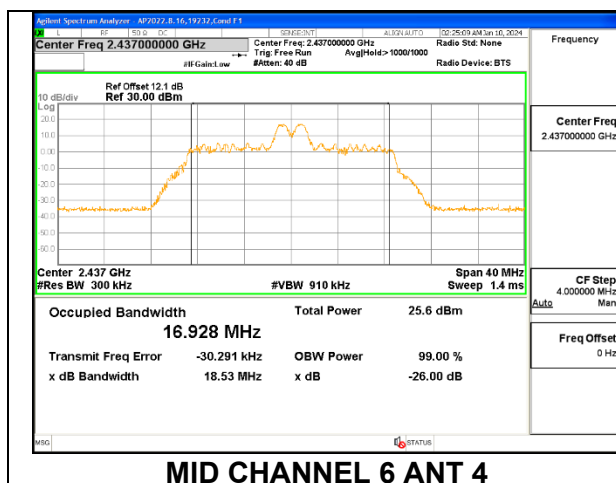


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 8

Channel	Frequency (MHz)	99% Bandwidth (MHz)	99% Bandwidth (MHz)
		ANT 4	ANT 3
Low 1	2412	18.383	18.242
Mid 6	2437	18.529	18.424
High 11	2462	18.522	18.339
High 12	2467	18.522	18.438
High 13	2472	18.600	18.497

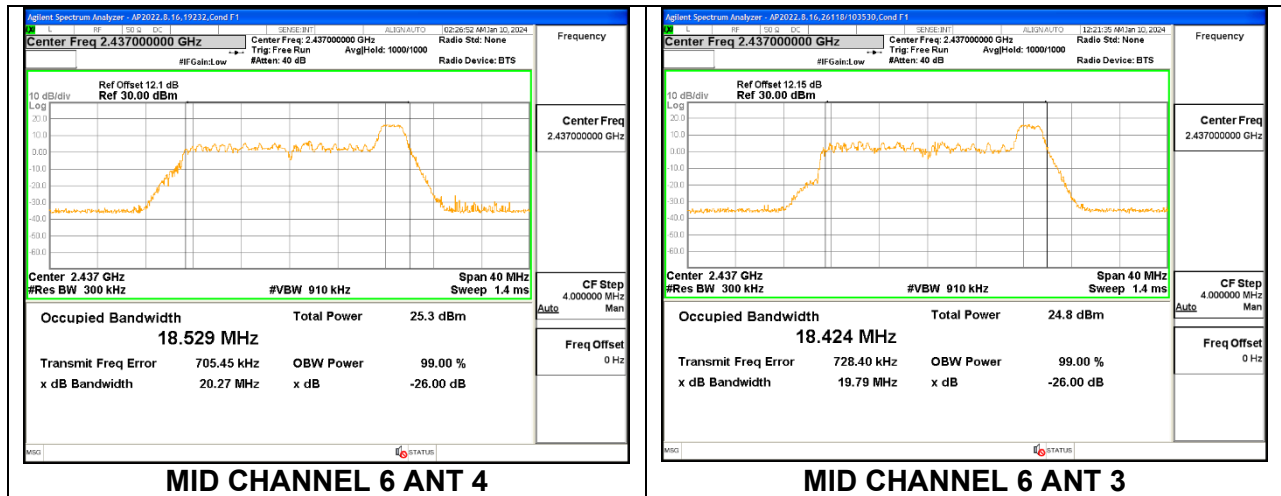

ANT 4 + ANT 3 2TX MODE: SU Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz) ANT 4	99% Bandwidth (MHz) ANT 3
Low 1	2412	18.963	18.956
Low 2	2417	18.991	18.939
Low 3	2422	18.966	18.984
Low 4	2427	18.977	18.952
Mid 6	2437	18.983	18.983
High 8	2447	18.936	19.070
High 9	2452	18.974	18.976
High 10	2457	19.038	19.019
High 11	2462	18.995	18.942
High 12	2467	19.055	18.969
High 13	2472	18.908	18.989

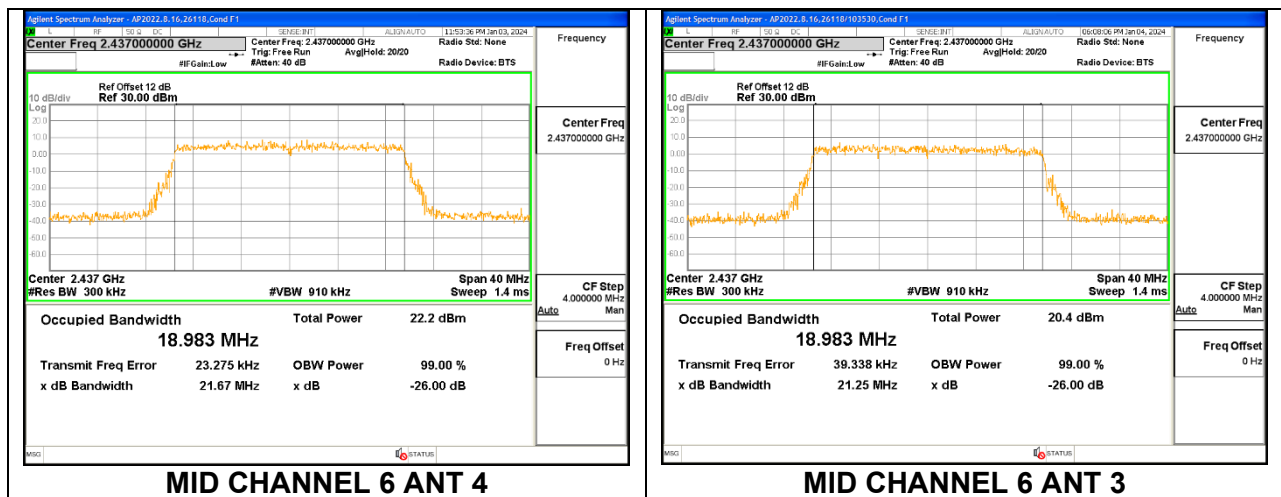

9.3. 6dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


The 6dB bandwidth was measured for the narrowest bandwidth mode, b Mode and 11be Mode 26-Tones as worst case to demonstrate compliance with the minimum required bandwidth of 500 kHz to cover all OFDMA modes.

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.3.1. 802.11b MODE 1TX


1TX ANT 4 MODE

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	9.16	0.5
Mid 6	2437	8.36	0.5
High 11	2462	8.20	0.5
High 12	2467	7.80	0.5
High 13	2472	7.68	0.5

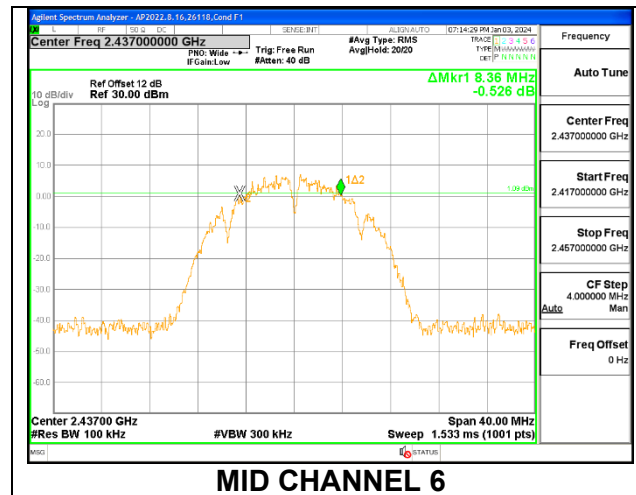

1TX ANT 3 MODE


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	5.96	0.5
Mid 6	2437	9.40	0.5
High 11	2462	9.16	0.5
High 12	2467	7.60	0.5
High 13	2472	8.20	0.5

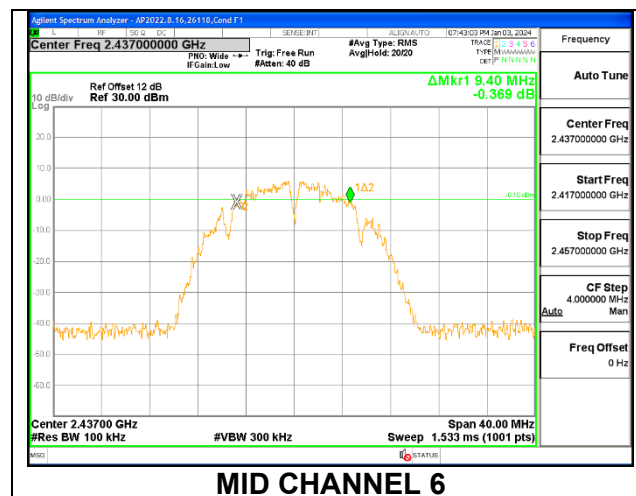

9.3.2. 802.11be EHT20 MODE


ANT 4 SISO MODE: 26-Tones, RU index 0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.08	0.5
Mid 6	2437	2.16	0.5
High 11	2462	2.08	0.5
High 12	2467	2.12	0.5
High 13	2472	2.12	0.5

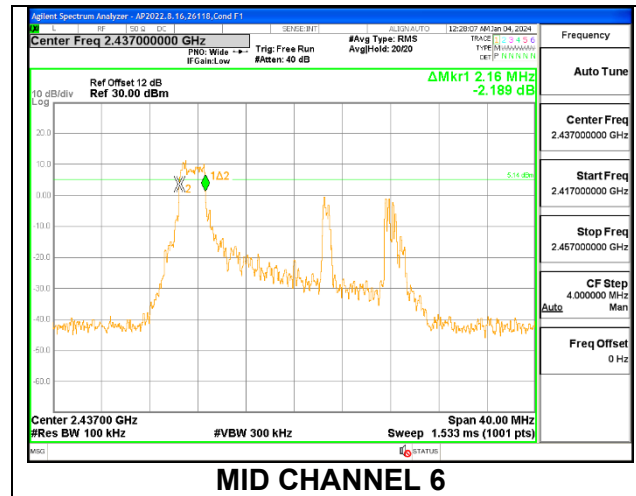


ANT 4 SISO MODE: 26-Tones, RU Index 4

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.68	0.5
Mid 6	2437	2.72	0.5
High 11	2462	2.72	0.5
High 12	2467	2.68	0.5
High 13	2472	2.68	0.5

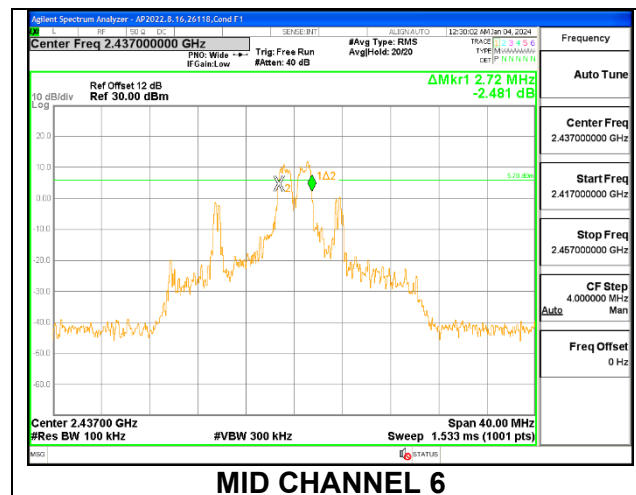


ANT 4 SISO MODE: 26-Tones, RU Index 8

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.12	0.5
Mid 6	2437	2.12	0.5
High 11	2462	2.16	0.5
High 12	2467	2.12	0.5
High 13	2472	2.32	0.5

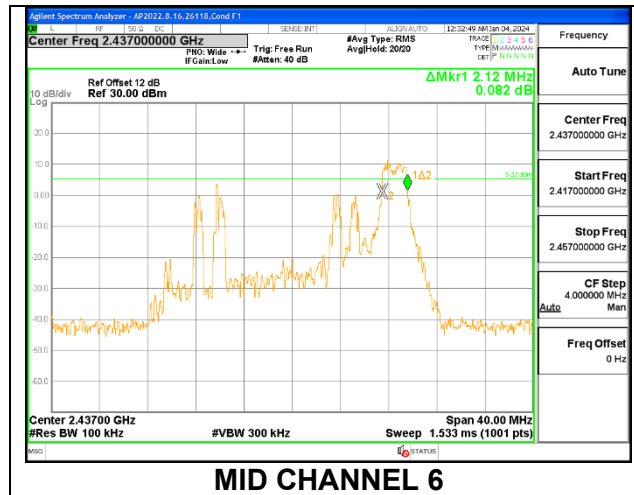


ANT 3 SISO MODE: 26-Tones, RU Index 0


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.12	0.5
Mid 6	2437	2.08	0.5
High 11	2462	2.20	0.5
High 12	2467	2.12	0.5
High 13	2472	2.12	0.5

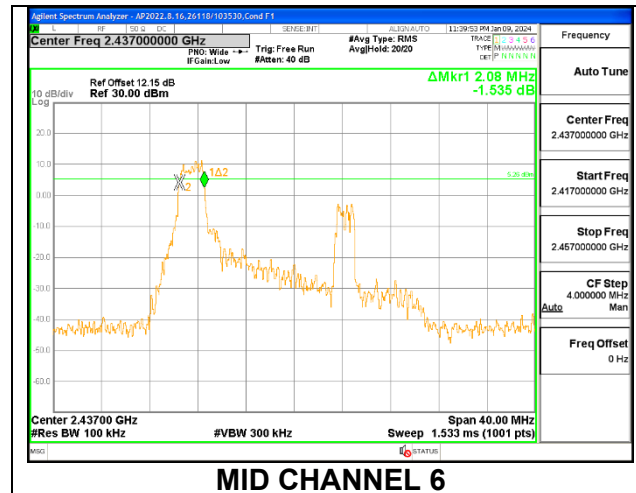**ANT 3 SISO MODE: 26-Tones, RU Index 4**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.68	0.5
Mid 6	2437	2.64	0.5
High 11	2462	2.72	0.5
High 12	2467	2.68	0.5
High 13	2472	2.72	0.5

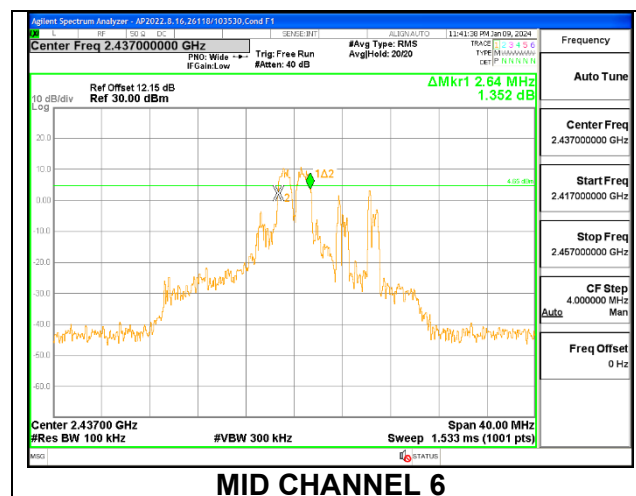



Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	2.16	0.5
Mid 6	2437	2.08	0.5
High 11	2462	2.12	0.5
High 12	2467	2.08	0.5
High 13	2472	2.20	0.5

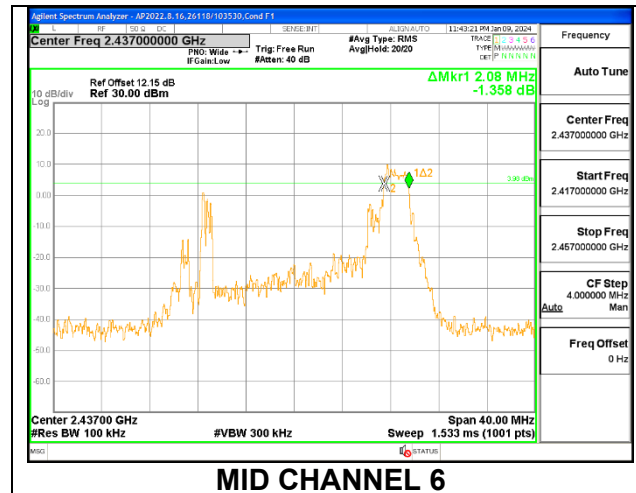

9.3.3. 802.11be EHT20 OFDMA MODE 2TX



ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 0

Channel	Frequency (MHz)	6dB BW(MHz) ANT 4	6dB BW (MHz) ANT 3	Minimum Limit (MHz)
Low 1	2412	2.12	2.16	0.5
Mid 6	2437	2.16	2.12	0.5
High 11	2462	2.08	2.16	0.5
High 12	2467	2.12	2.20	0.5
High 13	2472	2.16	2.12	0.5

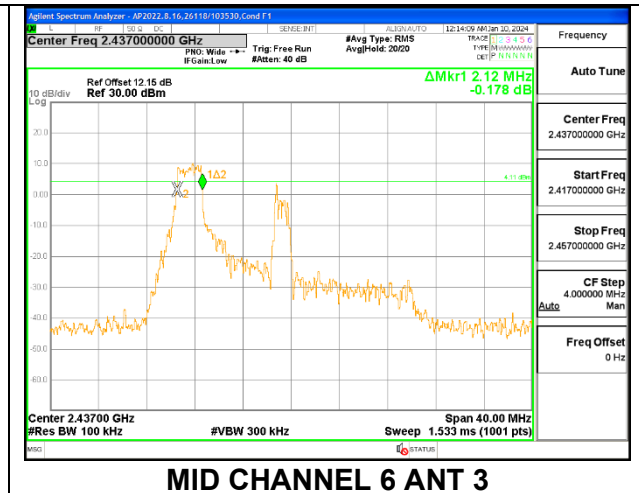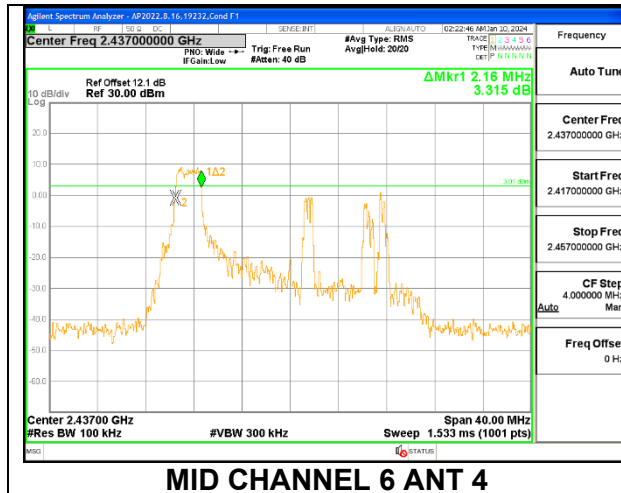


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 4

Channel	Frequency (MHz)	6dB BW(MHz) ANT 4	6dB BW (MHz) ANT 3	Minimum Limit (MHz)
Low 1	2412	2.72	2.68	0.5
Mid 6	2437	2.72	2.72	0.5
High 11	2462	2.76	2.56	0.5
High 12	2467	2.72	2.68	0.5
High 13	2472	2.68	2.76	0.5

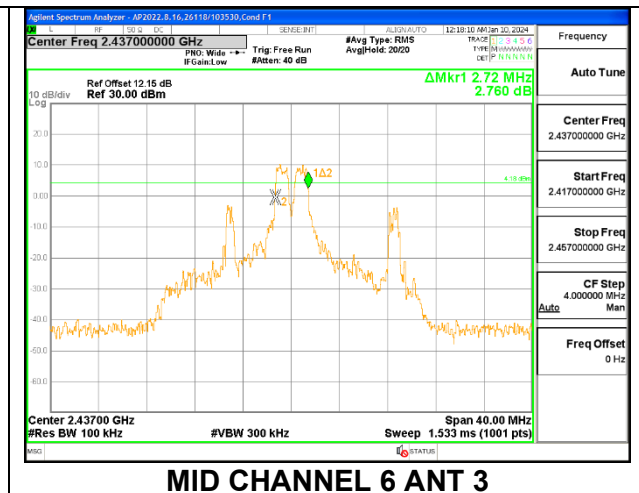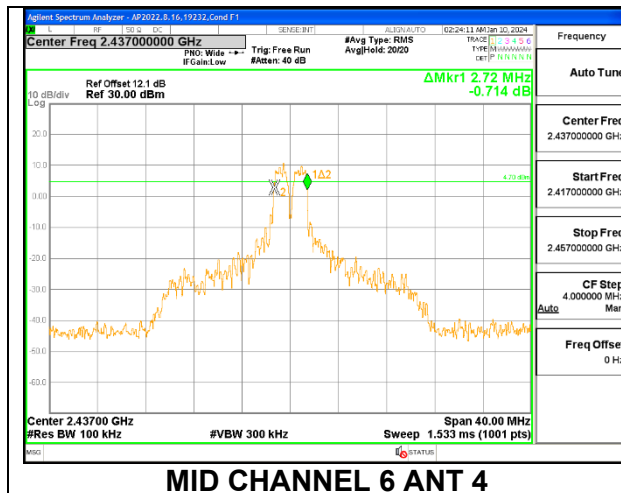

Channel	Frequency (MHz)	6dB BW(MHz) ANT 4	6dB BW (MHz) ANT 3	Minimum Limit (MHz)
Low 1	2412	2.20	2.16	0.5
Mid 6	2437	2.16	2.12	0.5
High 11	2462	2.12	2.12	0.5
High 12	2467	2.12	2.12	0.5
High 13	2472	2.12	2.12	0.5

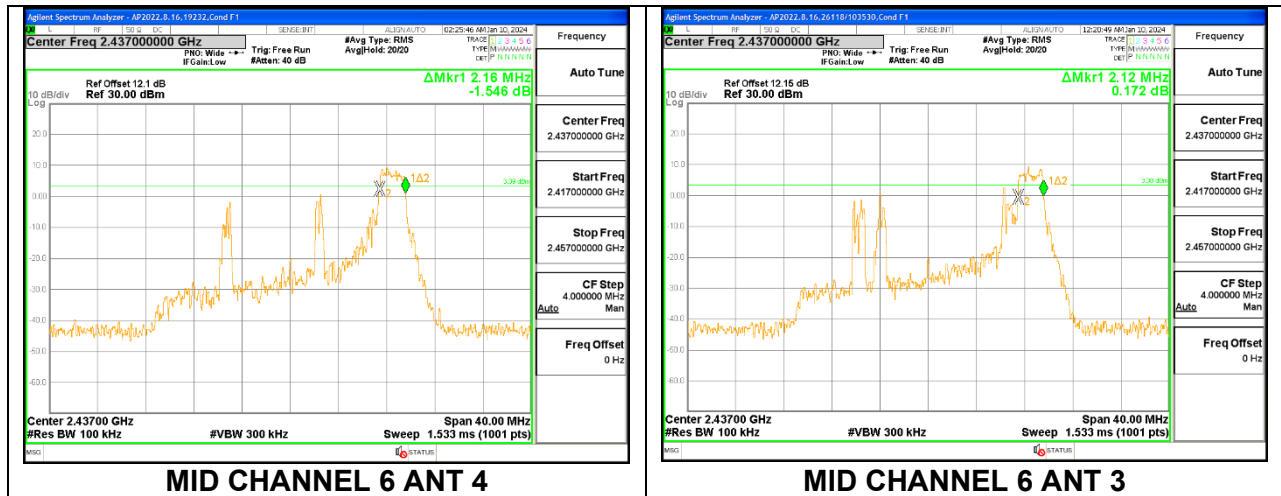

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Average output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are uncorrelated for power and correlated for PSD due to the device supporting CDD in all MIMO modes. The directional gains are as follows:

Band (GHz)	ANT 4 Gain (dBi)	ANT 3 Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	0.00	-2.10	-0.92	2.02

DIRECTIONAL GAIN CALCULATION:

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \text{LOG}((10^{(\text{Ant4}/10)} + 10^{(\text{Ant3}/10)})/2)$

Correlated directional Gain= $10 \cdot \text{LOG}(((10^{(\text{Ant4}/20)} + 10^{(\text{Ant3}/20)})^2)/2)$

Sample Calculation:

Ant4=0.0, Ant3=-2.1

Uncorrelated Antenna gain= $10 \log[(10^{(0/10)} + 10^{(-2.1/10)})/2] = -0.92 \text{dBi}$

Correlated Antenna gain= $10 \log[(10^{(0/20)} + 10^{(-2.1/20)})^2/2] = 2.02 \text{dBi}$

RESULTS

9.4.1. 802.11b MODE 1TX

Test Engineer:	32543
Test Date:	2024/06/21

1TX ANT 4 MODE**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	20.41	20.41	30.00	-9.59
Mid 6	2437	21.91	21.91	30.00	-8.09
High 11	2462	21.41	21.41	30.00	-8.59
High 12	2467	20.48	20.48	30.00	-9.52
High 13	2472	17.98	17.98	30.00	-12.02

1TX ANT 3 MODE**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	20.40	20.40	30.00	-9.60
Mid 6	2437	21.89	21.89	30.00	-8.11
High 11	2462	21.46	21.46	30.00	-8.54
High 12	2467	20.47	20.47	30.00	-9.53
High 13	2472	17.90	17.90	30.00	-12.10

9.4.2. 802.11n HT20 MODE

Test Engineer:	32543
Test Date:	2024/06/21

1TX ANT 4 MODE**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Low 2	2417	0.00	30.00	30	36	30.00
Low 3	2422	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 9	2452	0.00	30.00	30	36	30.00
High 10	2457	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	17.93	17.93	30.00	-12.07
Low 2	2417	19.47	19.47	30.00	-10.53
Low 3	2422	21.42	21.42	30.00	-8.58
Mid 6	2437	21.95	21.95	30.00	-8.05
High 9	2452	20.90	20.90	30.00	-9.10
High 10	2457	19.43	19.43	30.00	-10.57
High 11	2462	18.43	18.43	30.00	-11.57
High 12	2467	15.95	15.95	30.00	-14.05
High 13	2472	14.41	14.41	30.00	-15.59

1TX ANT 3 MODE**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Low 2	2417	-2.10	30.00	30	36	30.00
Low 3	2422	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 9	2452	-2.10	30.00	30	36	30.00
High 10	2457	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	17.91	17.91	30.00	-12.09
Low 2	2417	19.48	19.48	30.00	-10.52
Low 3	2422	21.48	21.48	30.00	-8.52
Mid 6	2437	21.94	21.94	30.00	-8.06
High 9	2452	20.98	20.98	30.00	-9.02
High 10	2457	19.48	19.48	30.00	-10.52
High 11	2462	18.45	18.45	30.00	-11.55
High 12	2467	15.99	15.99	30.00	-14.01
High 13	2472	14.44	14.44	30.00	-15.56

9.4.3. 802.11n HT20 CDD MODE 2TX**ANT 4 + ANT 3 2TX MODE**

Test Engineer:	32543
Test Date:	2024/06/21

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-0.92	30.00	36	30.00
Low 2	2417	-0.92	30.00	36	30.00
Low 3	2422	-0.92	30.00	36	30.00
Mid 6	2437	-0.92	30.00	36	30.00
High 8	2447	-0.92	30.00	36	30.00
High 9	2452	-0.92	30.00	36	30.00
High 10	2457	-0.92	30.00	36	30.00
High 11	2462	-0.92	30.00	36	30.00
High 12	2467	-0.92	30.00	36	30.00
High 13	2472	-0.92	30.00	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Results

Channel	Frequency (MHz)	ANT 4 Meas Power (dBm)	ANT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	17.40	17.45	20.44	30.00	-9.56
Low 2	2417	18.45	18.42	21.45	30.00	-8.55
Low 3	2422	19.97	19.96	22.98	30.00	-7.02
Mid 6	2437	21.97	21.98	24.99	30.00	-5.01
High 8	2447	21.97	21.96	24.98	30.00	-5.02
High 9	2452	19.40	19.49	22.46	30.00	-7.54
High 10	2457	18.47	18.47	21.48	30.00	-8.52
High 11	2462	17.41	17.48	20.46	30.00	-9.54
High 12	2467	14.91	14.95	17.94	30.00	-12.06
High 13	2472	14.22	14.20	17.22	30.00	-12.78

9.4.4. 802.11be EHT20 MODE

Test Engineer:	32543
Test Date:	2024/06/21

1TX ANT 4 MODE: 26-Tones, RU Index 0**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.45	12.45	30.00	-17.55
Mid 6	2437	12.50	12.50	30.00	-17.50
High 11	2462	12.40	12.40	30.00	-17.60
High 12	2467	12.47	12.47	30.00	-17.53
High 13	2472	-0.07	-0.07	30.00	-30.07

1TX ANT 4 MODE: 26-Tones, RU Index 4**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.48	12.48	30.00	-17.52
Mid 6	2437	12.41	12.41	30.00	-17.59
High 11	2462	12.47	12.47	30.00	-17.53
High 12	2467	12.48	12.48	30.00	-17.52
High 13	2472	-0.10	-0.10	30.00	-30.10

1TX ANT 4 MODE: 26-Tones, RU Index 8**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.40	12.40	30.00	-17.60
Mid 6	2437	12.41	12.41	30.00	-17.59
High 11	2462	12.42	12.42	30.00	-17.58
High 12	2467	12.44	12.44	30.00	-17.56
High 13	2472	-0.10	-0.10	30.00	-30.10

1TX ANT 4 MODE: SU Mode**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	0.00	30.00	30	36	30.00
Low 2	2417	0.00	30.00	30	36	30.00
Low 3	2422	0.00	30.00	30	36	30.00
Mid 6	2437	0.00	30.00	30	36	30.00
High 9	2452	0.00	30.00	30	36	30.00
High 10	2457	0.00	30.00	30	36	30.00
High 11	2462	0.00	30.00	30	36	30.00
High 12	2467	0.00	30.00	30	36	30.00
High 13	2472	0.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	16.98	16.98	30.00	-13.02
Low 2	2417	17.90	17.90	30.00	-12.10
Low 3	2422	21.44	21.44	30.00	-8.56
Mid 6	2437	21.90	21.90	30.00	-8.10
High 9	2452	21.42	21.42	30.00	-8.58
High 10	2457	17.91	17.91	30.00	-12.09
High 11	2462	16.98	16.98	30.00	-13.02
High 12	2467	14.99	14.99	30.00	-15.01
High 13	2472	9.94	9.94	30.00	-20.06

1TX ANT 3 MODE: 26-Tones, RU Index 0**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.49	12.49	30.00	-17.51
Mid 6	2437	12.40	12.40	30.00	-17.60
High 11	2462	12.44	12.44	30.00	-17.56
High 12	2467	12.47	12.47	30.00	-17.53
High 13	2472	-0.01	-0.01	30.00	-30.01

1TX ANT 3 MODE: 26-Tones, RU Index 4**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.47	12.47	30.00	-17.53
Mid 6	2437	12.42	12.42	30.00	-17.58
High 11	2462	12.41	12.41	30.00	-17.59
High 12	2467	12.46	12.46	30.00	-17.54
High 13	2472	-0.05	-0.05	30.00	-30.05

1TX ANT 3 MODE: 26-Tones, RU Index 8**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.48	12.48	30.00	-17.52
Mid 6	2437	12.40	12.40	30.00	-17.60
High 11	2462	12.46	12.46	30.00	-17.54
High 12	2467	12.42	12.42	30.00	-17.58
High 13	2472	-0.06	-0.06	30.00	-30.06

1TX ANT 3 MODE: SU Mode**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-2.10	30.00	30	36	30.00
Low 2	2417	-2.10	30.00	30	36	30.00
Low 3	2422	-2.10	30.00	30	36	30.00
Mid 6	2437	-2.10	30.00	30	36	30.00
High 9	2452	-2.10	30.00	30	36	30.00
High 10	2457	-2.10	30.00	30	36	30.00
High 11	2462	-2.10	30.00	30	36	30.00
High 12	2467	-2.10	30.00	30	36	30.00
High 13	2472	-2.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	16.90	16.90	30.00	-13.10
Low 2	2417	17.92	17.92	30.00	-12.08
Low 3	2422	21.48	21.48	30.00	-8.52
Mid 6	2437	21.94	21.94	30.00	-8.06
High 9	2452	21.41	21.41	30.00	-8.59
High 10	2457	17.95	17.95	30.00	-12.05
High 11	2462	16.92	16.92	30.00	-13.08
High 12	2467	14.90	14.90	30.00	-15.10
High 13	2472	9.93	9.93	30.00	-20.07

9.4.5. 802.11be EHT20 OFDMA MODE 2TX

Test Engineer:	32543
Test Date:	2024/06/21

ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 0**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-0.92	30.00	36	30.00
Mid 6	2437	-0.92	30.00	36	30.00
High 11	2462	-0.92	30.00	36	30.00
High 12	2467	-0.92	30.00	36	30.00
High 13	2472	-0.92	30.00	36	30.00

Results

Channel	Frequency (MHz)	ANT4 Meas Power (dBm)	ANT3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.34	12.42	15.39	30.00	-14.61
Mid 6	2437	12.40	12.42	15.42	30.00	-14.58
High 11	2462	12.44	12.40	15.43	30.00	-14.57
High 12	2467	12.45	12.41	15.44	30.00	-14.56
High 13	2472	-0.01	-0.06	2.98	30.00	-27.02

ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 4**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-0.92	30.00	36	30.00
Mid 6	2437	-0.92	30.00	36	30.00
High 11	2462	-0.92	30.00	36	30.00
High 12	2467	-0.92	30.00	36	30.00
High 13	2472	-0.92	30.00	36	30.00

Results

Channel	Frequency (MHz)	ANT 4 Meas Power (dBm)	ANT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.41	12.48	15.46	30.00	-14.54
Mid 6	2437	12.46	12.44	15.46	30.00	-14.54
High 11	2462	12.43	12.42	15.44	30.00	-14.56
High 12	2467	12.42	12.48	15.46	30.00	-14.54
High 13	2472	-0.03	-0.05	2.97	30.00	-27.03

ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 8**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-0.92	30.00	36	30.00
Mid 6	2437	-0.92	30.00	36	30.00
High 11	2462	-0.92	30.00	36	30.00
High 12	2467	-0.92	30.00	36	30.00
High 13	2472	-0.92	30.00	36	30.00

Results

Channel	Frequency (MHz)	ANT 4 Meas Power (dBm)	ANT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	12.41	12.44	15.44	30.00	-14.56
Mid 6	2437	12.41	12.41	15.42	30.00	-14.58
High 11	2462	12.43	12.46	15.46	30.00	-14.54
High 12	2467	12.48	12.41	15.46	30.00	-14.54
High 13	2472	-0.02	-0.05	2.98	30.00	-27.02

ANT 4 + ANT 3 2TX MODE: SU Mode

	(MHz)	(dBi)	Limit (dBm)	Limit (dBm)	(dBm)
Low 1	2412	-0.92	30.00	36	30.00
Low 2	2417	-0.92	30.00	36	30.00
Low 3	2422	-0.92	30.00	36	30.00
Low 4	2427	-0.92	30.00	36	30.00
Mid 6	2437	-0.92	30.00	36	30.00
High 8	2447	-0.92	30.00	36	30.00
High 9	2452	-0.92	30.00	36	30.00
High 10	2457	-0.92	30.00	36	30.00
High 11	2462	-0.92	30.00	36	30.00
High 12	2467	-0.92	30.00	36	30.00
High 13	2472	-0.92	30.00	36	30.00

Results

Channel	Frequency (MHz)	ANT 4 Meas Power (dBm)	ANT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	15.97	15.99	18.99	30.00	-11.01
Low 2	2417	16.90	16.99	19.96	30.00	-10.04
Low 3	2422	18.99	18.99	22.00	30.00	-8.00
Low 4	2427	21.99	21.98	25.00	30.00	-5.00
Mid 6	2437	21.97	21.97	24.98	30.00	-5.02
High 8	2447	21.99	21.94	24.98	30.00	-5.02
High 9	2452	18.49	18.49	21.50	30.00	-8.50
High 10	2457	16.98	16.93	19.97	30.00	-10.03
High 11	2462	15.98	15.98	18.99	30.00	-11.01
High 12	2467	13.90	13.91	16.92	30.00	-13.08
High 13	2472	8.98	8.90	11.95	30.00	-18.05

9.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

Note: RBW setting is used greater than 3KHz on PSD measurement

9.5.1. 802.11b MODE 1TX


1TX ANT 4 MODE

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-0.916	-0.916	8.0	-8.9
Mid 6	2437	-0.125	0.511	8.0	-7.5
High 11	2462	-0.009	-0.009	8.0	-8.0
High 12	2467	-0.604	-0.604	8.0	-8.6
High 13	2472	-2.467	-2.467	8.0	-10.5

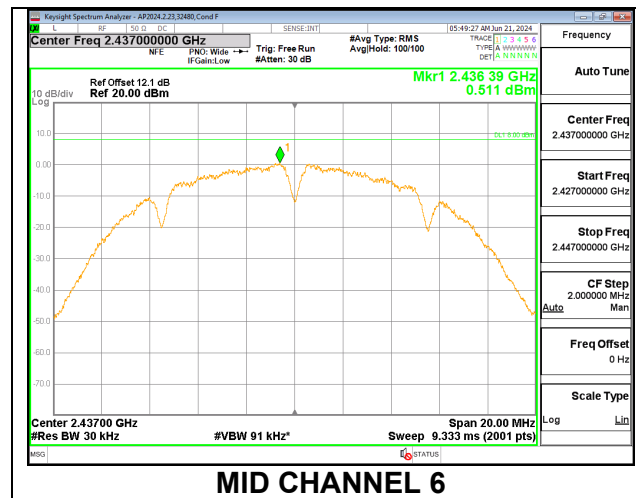

1TX ANT 3 MODE


Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-1.035	-1.035	8.0	-9.0
Mid 6	2437	-0.223	0.423	8.0	-7.6
High 11	2462	0.010	0.010	8.0	-8.0
High 12	2467	-0.707	-0.707	8.0	-8.7
High 13	2472	-2.787	-2.787	8.0	-10.8

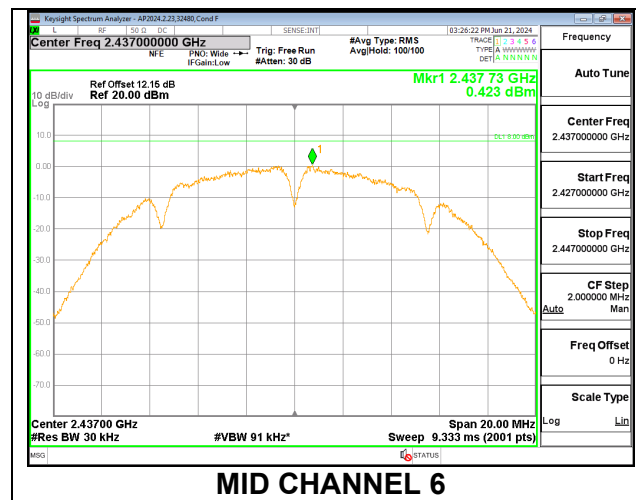

9.5.2. 802.11n HT20 MODE


1TX ANT 4 MODE

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-6.709	-6.709	8.0	-14.7
Low 2	2417	-5.385	-5.385	8.0	-13.4
Low 3	2422	-3.173	-3.173	8.0	-11.2
Mid 6	2437	-1.812	-1.812	8.0	-9.8
High 9	2452	-3.683	-3.683	8.0	-11.7
High 10	2457	-5.336	-5.336	8.0	-13.3
High 11	2462	-6.560	-6.560	8.0	-14.6
High 12	2467	-8.675	-8.675	8.0	-16.7
High 13	2472	-10.457	-10.457	8.0	-18.5

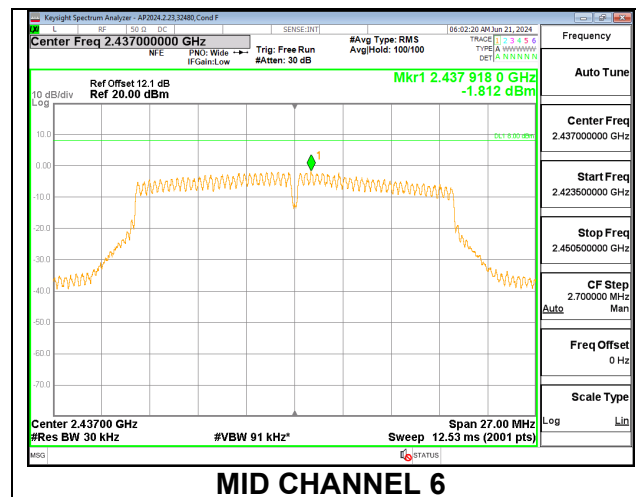

1TX ANT 3 MODE



Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-6.546	-6.546	8.0	-14.5
Low 2	2417	-5.151	-5.151	8.0	-13.2
Low 3	2422	-2.855	-2.855	8.0	-10.9
Mid 6	2437	-2.023	-2.023	8.0	-10.0
High 9	2452	-3.265	-3.265	8.0	-11.3
High 10	2457	-4.959	-4.959	8.0	-13.0
High 11	2462	-6.338	-6.338	8.0	-14.3
High 12	2467	-8.559	-8.559	8.0	-16.6
High 13	2472	-10.052	-10.052	8.0	-18.1

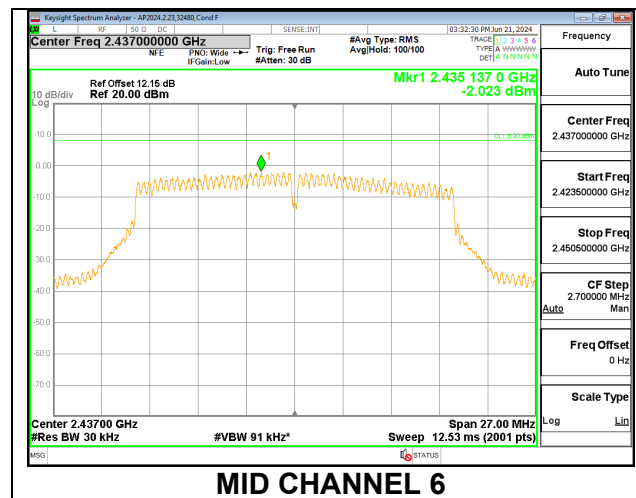

9.5.3. 802.11n HT20 CDD MODE 2TX


ANT 4 + ANT 3 2TX MODE

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD			
Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-7.560	-7.286	-4.411	8.0	-12.4
Low 2	2417	-6.391	-6.186	-3.277	8.0	-11.3
Low 3	2422	-4.843	-4.841	-1.832	8.0	-9.8
Mid 6	2437	-1.873	-1.834	1.157	8.0	-6.8
High 8	2447	-1.871	-1.892	1.129	8.0	-6.9
High 9	2452	-5.131	-4.790	-1.947	8.0	-9.9
High 10	2457	-6.260	-6.117	-3.178	8.0	-11.2
High 11	2462	-7.431	-7.255	-4.332	8.0	-12.3
High 12	2467	-9.806	-9.663	-6.724	8.0	-14.7
High 13	2472	-10.442	-10.199	-7.309	8.0	-15.3

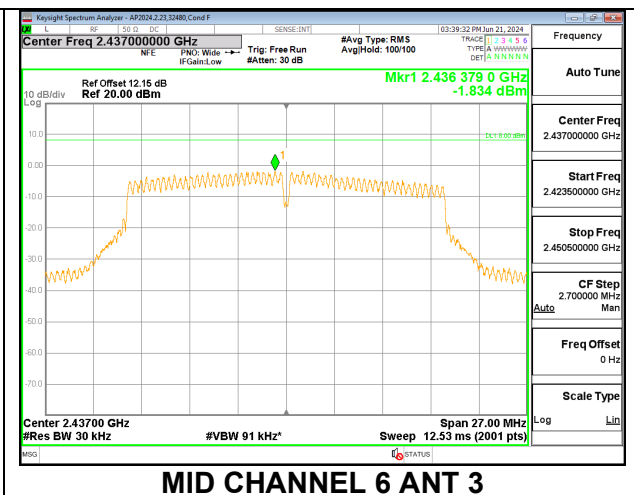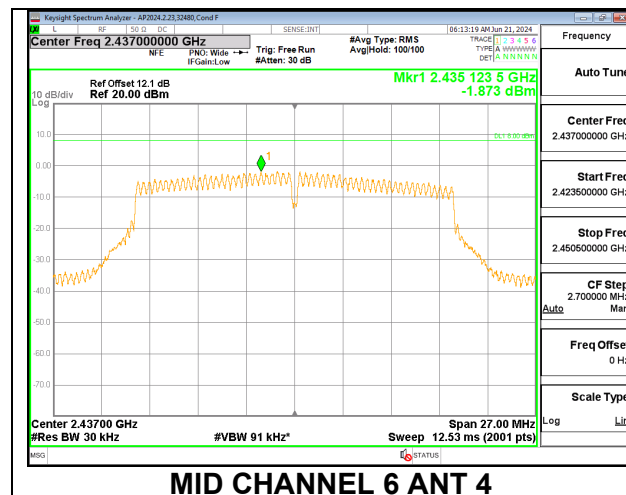


9.5.4. 802.11be EHT20 MODE**1TX ANT 4 MODE , 26-Tone RU Index 0**

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.338	-4.338	8.0	-12.3
Mid 6	2437	-4.477	-4.477	8.0	-12.5
High 11	2462	-4.755	-4.755	8.0	-12.8
High 12	2467	-4.599	-4.599	8.0	-12.6
High 13	2472	-17.227	-17.227	8.0	-25.2

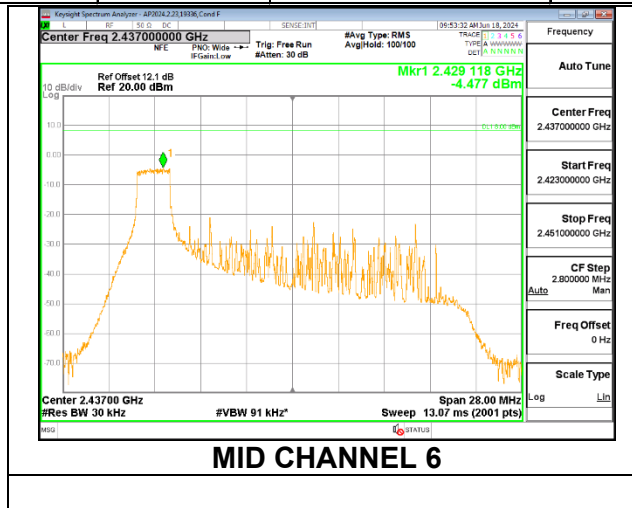
**1TX ANT 4 MODE , 26-Tone RU Index 4**

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.182	-4.182	8.0	-12.2
Mid 6	2437	-4.439	-4.439	8.0	-12.4
High 11	2462	-4.596	-4.596	8.0	-12.6
High 12	2467	-4.581	-4.581	8.0	-12.6
High 13	2472	-17.331	-17.331	8.0	-25.3

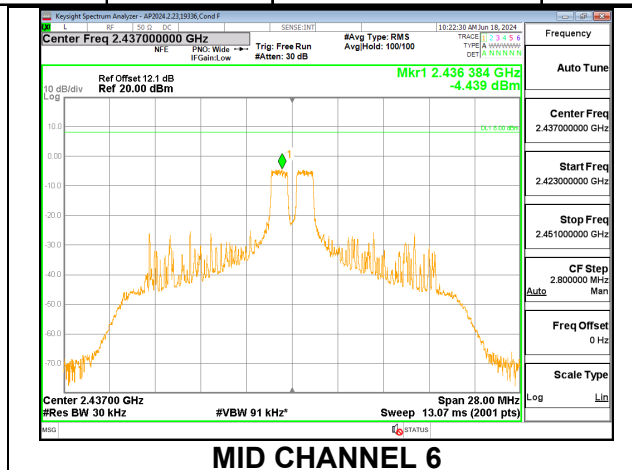


1TX ANT 4 MODE , 26-Tone RU Index 8

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.733	-4.733	8.0	-12.7
Mid 6	2437	-4.429	-4.429	8.0	-12.4
High 11	2462	-4.306	-4.306	8.0	-12.3
High 12	2467	-4.397	-4.397	8.0	-12.4
High 13	2472	-17.332	-17.332	8.0	-25.3

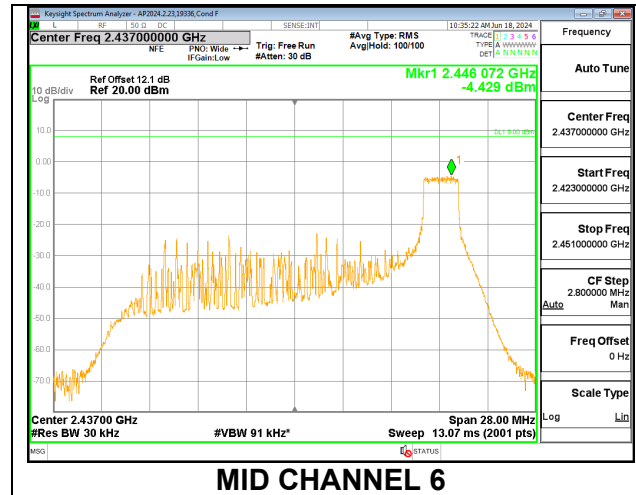


1TX ANT 4 MODE , SU Mode

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-9.217	-9.217	8.0	-17.2
Low 2	2417	-8.270	-8.270	8.0	-16.3
Low 3	2422	-4.486	-4.486	8.0	-12.5
Mid 6	2437	-3.611	-3.611	8.0	-11.6
High 9	2452	-4.576	-4.576	8.0	-12.6
High 10	2457	-8.382	-8.382	8.0	-16.4
High 11	2462	-9.248	-9.248	8.0	-17.2
High 12	2467	-11.102	-11.102	8.0	-19.1
High 13	2472	-16.228	-16.228	8.0	-24.2

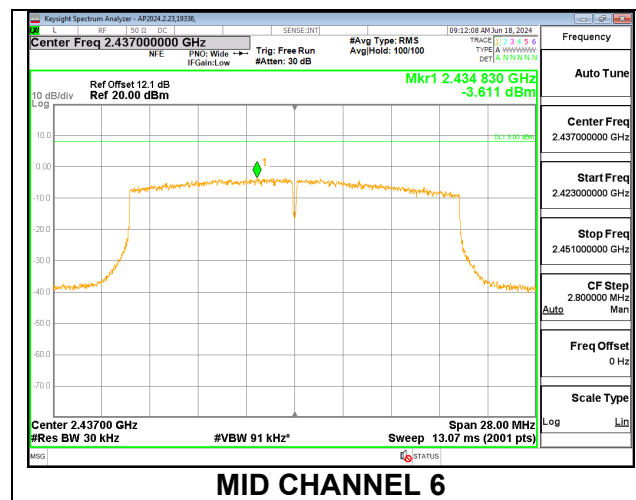


1TX ANT 3 MODE , 26-Tone RU Index 0

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.552	-4.552	8.0	-12.6
Mid 6	2437	-4.759	-4.759	8.0	-12.8
High 11	2462	-4.418	-4.418	8.0	-12.4
High 12	2467	-4.602	-4.602	8.0	-12.6
High 13	2472	-17.109	-17.109	8.0	-25.1

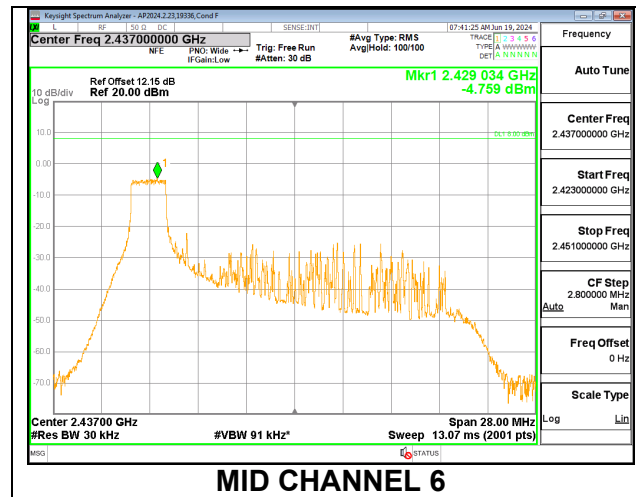
**1TX ANT 3 MODE , 26-Tone RU Index 4**

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.559	-4.559	8.0	-12.6
Mid 6	2437	-4.668	-4.668	8.0	-12.7
High 11	2462	-4.681	-4.681	8.0	-12.7
High 12	2467	-4.570	-4.570	8.0	-12.6
High 13	2472	-17.238	-17.238	8.0	-25.2

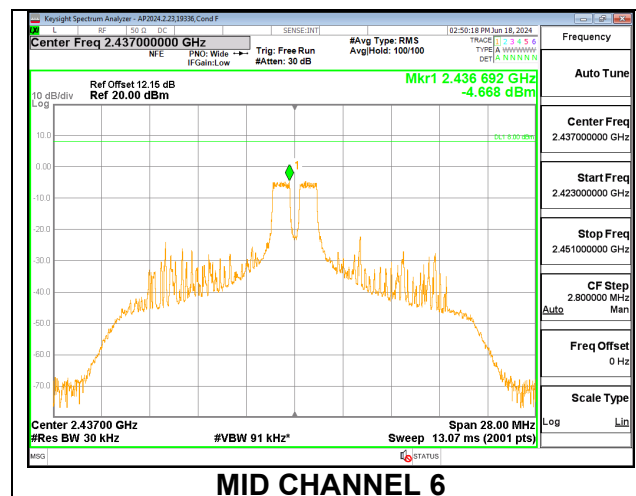


1TX ANT 3 MODE , 26-Tone RU Index 8

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.581	-4.581	8.0	-12.6
Mid 6	2437	-4.747	-4.747	8.0	-12.7
High 11	2462	-4.341	-4.341	8.0	-12.3
High 12	2467	-4.674	-4.674	8.0	-12.7
High 13	2472	-17.281	-17.281	8.0	-25.3

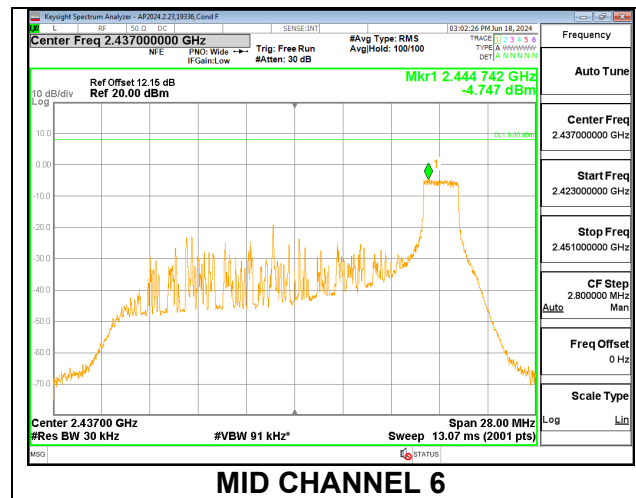

1TX ANT 3 MODE , SU Mode


Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
Channel	Frequency (MHz)	Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-9.458	-9.458	8.0	-17.5
Low 2	2417	-8.058	-8.058	8.0	-16.1
Low 3	2422	-4.540	-4.540	8.0	-12.5
Mid 6	2437	-3.502	-3.502	8.0	-11.5
High 9	2452	-4.737	-4.737	8.0	-12.7
High 10	2457	-7.806	-7.806	8.0	-15.8
High 11	2462	-9.214	-9.214	8.0	-17.2
High 12	2467	-10.850	-10.850	8.0	-18.9
High 13	2472	-15.983	-15.983	8.0	-24.0

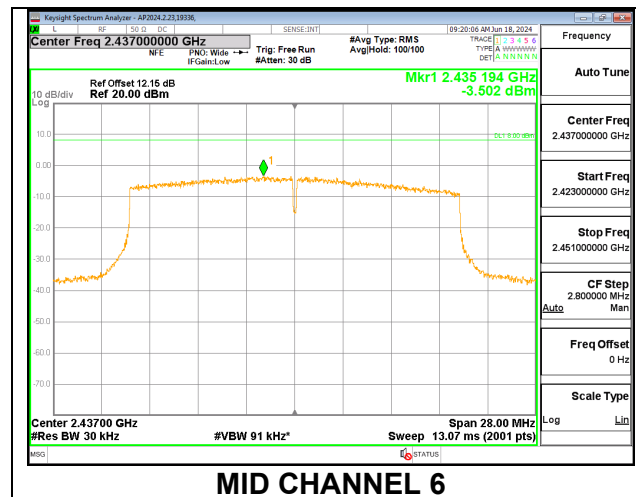

9.5.5. 802.11be EHT20 OFDMA MODE 2TX


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 0

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD			
Channel	Frequency (MHz)	ANT4 Meas (dBm/ 3kHz)	ANT3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.853	-4.680	-1.755	8.0	-9.8
Mid 6	2437	-4.749	-4.664	-1.696	8.0	-9.7
High 11	2462	-4.547	-4.789	-1.656	8.0	-9.7
High 12	2467	-4.563	-4.688	-1.615	8.0	-9.6
High 13	2472	-17.182	-17.205	-14.183	8.0	-22.2

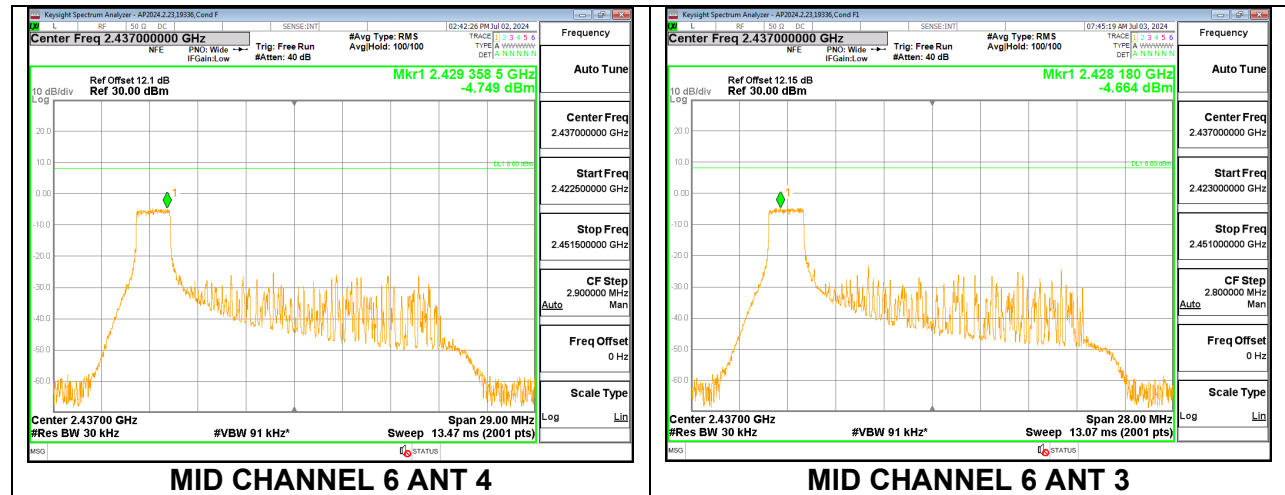


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 4

Duty Cycle CF (dB)		0.00					Included in Calculations of Corr'd PSD	
Channel	Frequency (MHz)	ANT4 Meas (dBm/ 3kHz)	ANT3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)		
Low 1	2412	-4.459	-4.579	-1.508	8.0	-9.5		
Mid 6	2437	-4.597	-4.547	-1.562	8.0	-9.6		
High 11	2462	-4.620	-4.674	-1.637	8.0	-9.6		
High 12	2467	-4.654	-4.587	-1.610	8.0	-9.6		
High 13	2472	-17.349	-17.389	-14.359	8.0	-22.4		

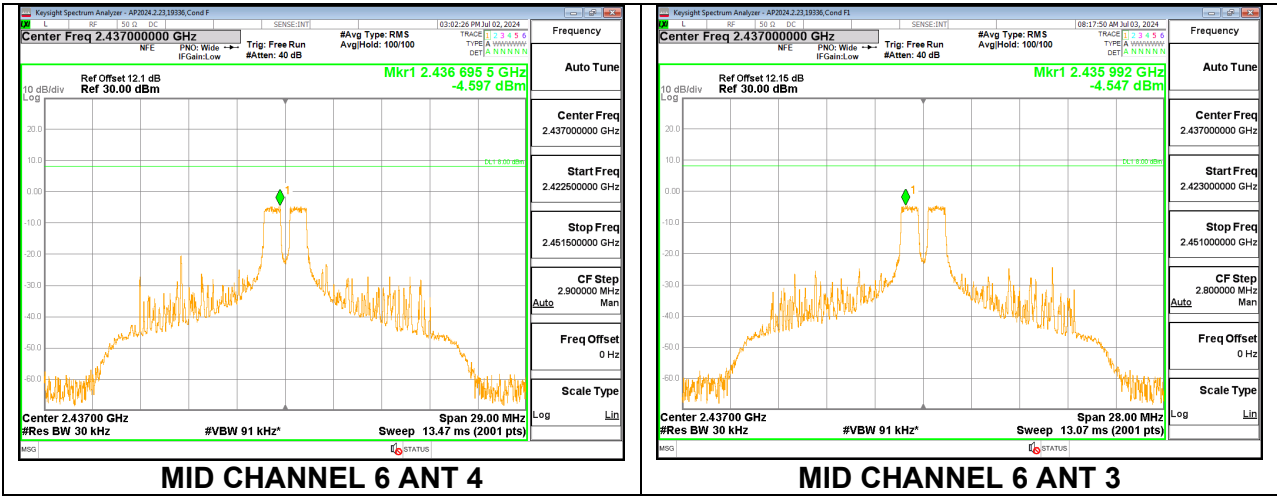


ANT 4 + ANT 3 2TX MODE: 26-Tones, RU Index 8

Duty Cycle CF (dB)		Included in Calculations of Corr'd PSD				
Channel	Frequency (MHz)	ANT4 Meas (dBm/ 3kHz)	ANT3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-4.712	-4.551	-1.620	8.0	-9.6
Mid 6	2437	-4.691	-4.687	-1.679	8.0	-9.7
High 11	2462	-4.612	-4.510	-1.550	8.0	-9.6
High 12	2467	-4.582	-4.725	-1.643	8.0	-9.6
High 13	2472	-16.088	-17.357	-13.666	8.0	-21.7

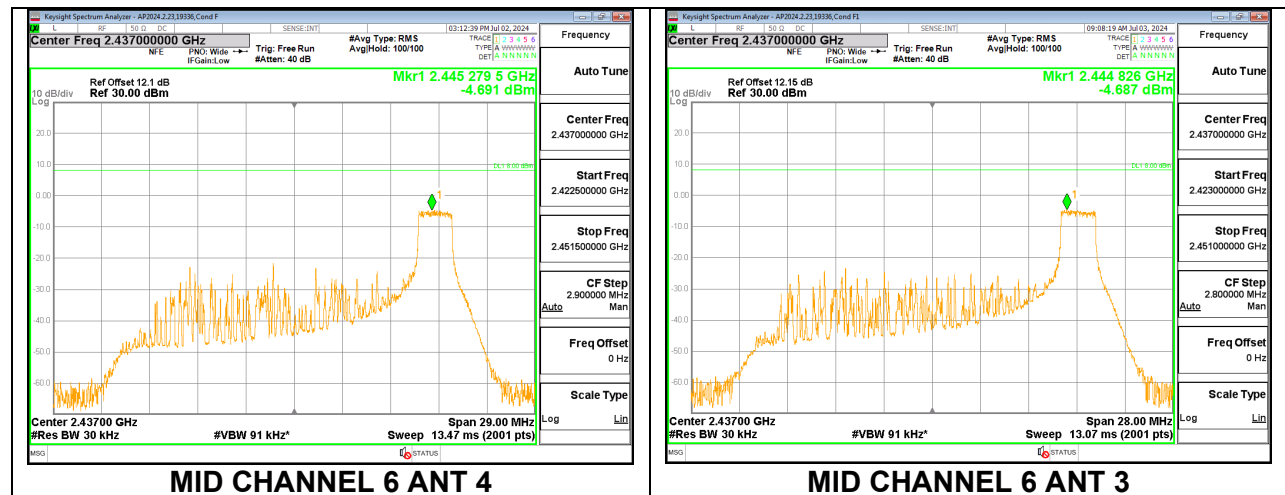

ANT 4 + ANT 3 2TX MODE: SU Mode

Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD			
Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low 1	2412	-10.430	-10.088	-7.245	8.0	-15.2
Low 2	2417	-9.321	-9.067	-6.182	8.0	-14.2
Low 3	2422	-7.136	-7.102	-4.109	8.0	-12.1
Low 4	2427	-3.306	-3.361	-0.323	8.0	-8.3
Mid 6	2437	-3.417	-3.397	-0.397	8.0	-8.4
High 8	2447	-3.213	-3.512	-0.350	8.0	-8.3
High 9	2452	-7.537	-7.530	-4.523	8.0	-12.5
High 10	2457	-9.285	-9.431	-6.347	8.0	-14.3
High 11	2462	-10.370	-10.330	-7.340	8.0	-15.3
High 12	2467	-12.410	-12.286	-9.337	8.0	-17.3
High 13	2472	-16.835	-17.128	-13.969	8.0	-22.0

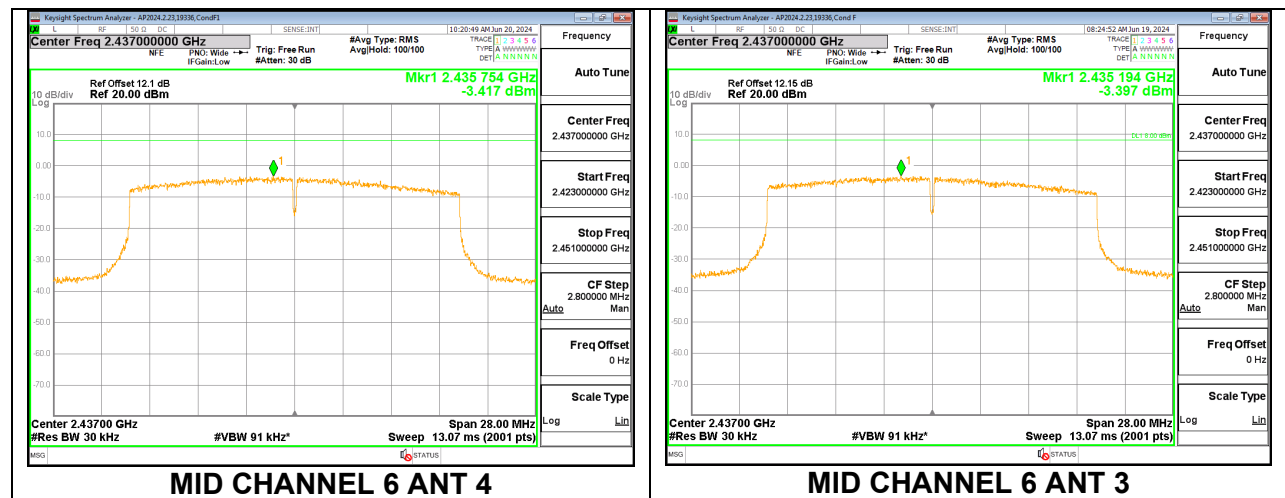

9.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


RESULTS

9.6.1. 802.11b MODE 1TX


1TX ANT 4 MODE

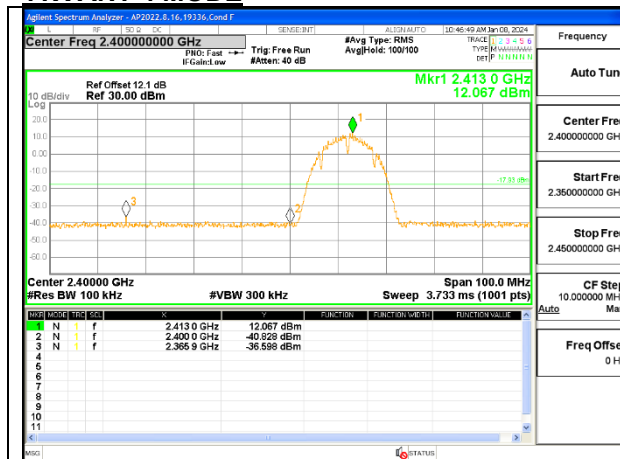


LOW CHANNEL 1 BANDEDGE

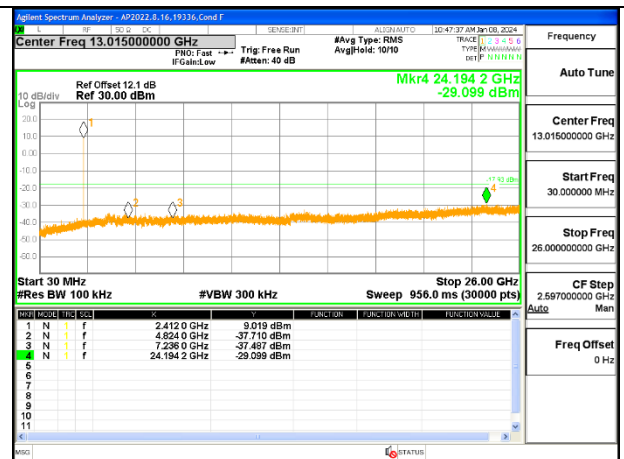


OUT-OF-BAND LOW CHANNEL 1

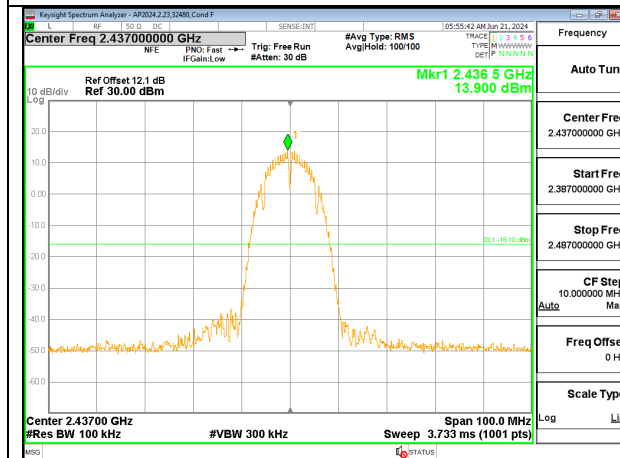


IN-BAND REFERENCE LEVEL

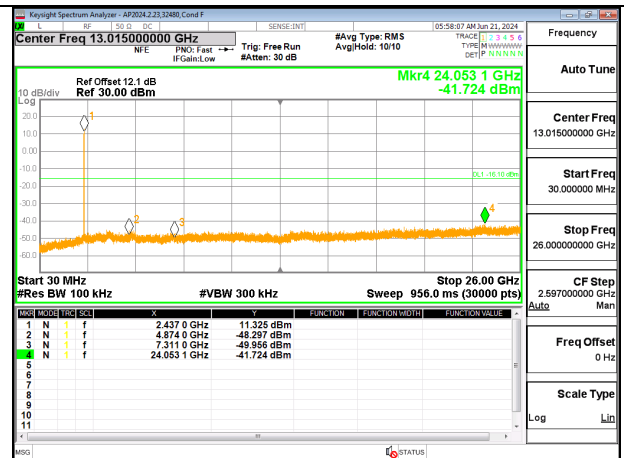


OUT-OF-BAND MID CHANNEL

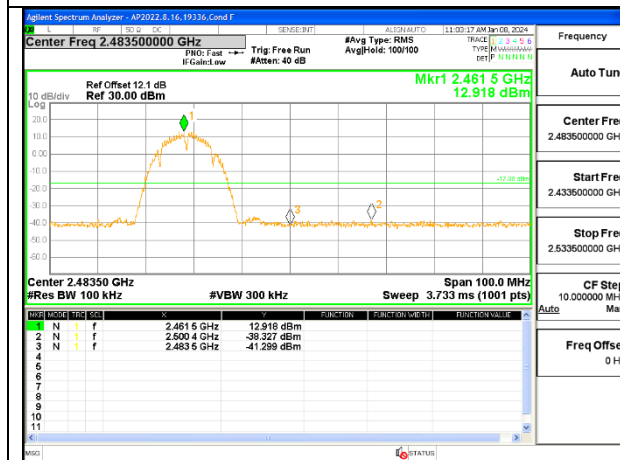



HIGH CHANNEL 11 BANDEDGE

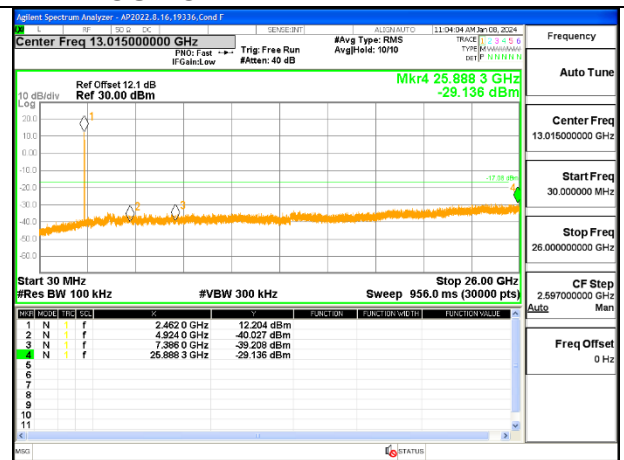

OUT-OF-BAND HIGH CHANNEL 11

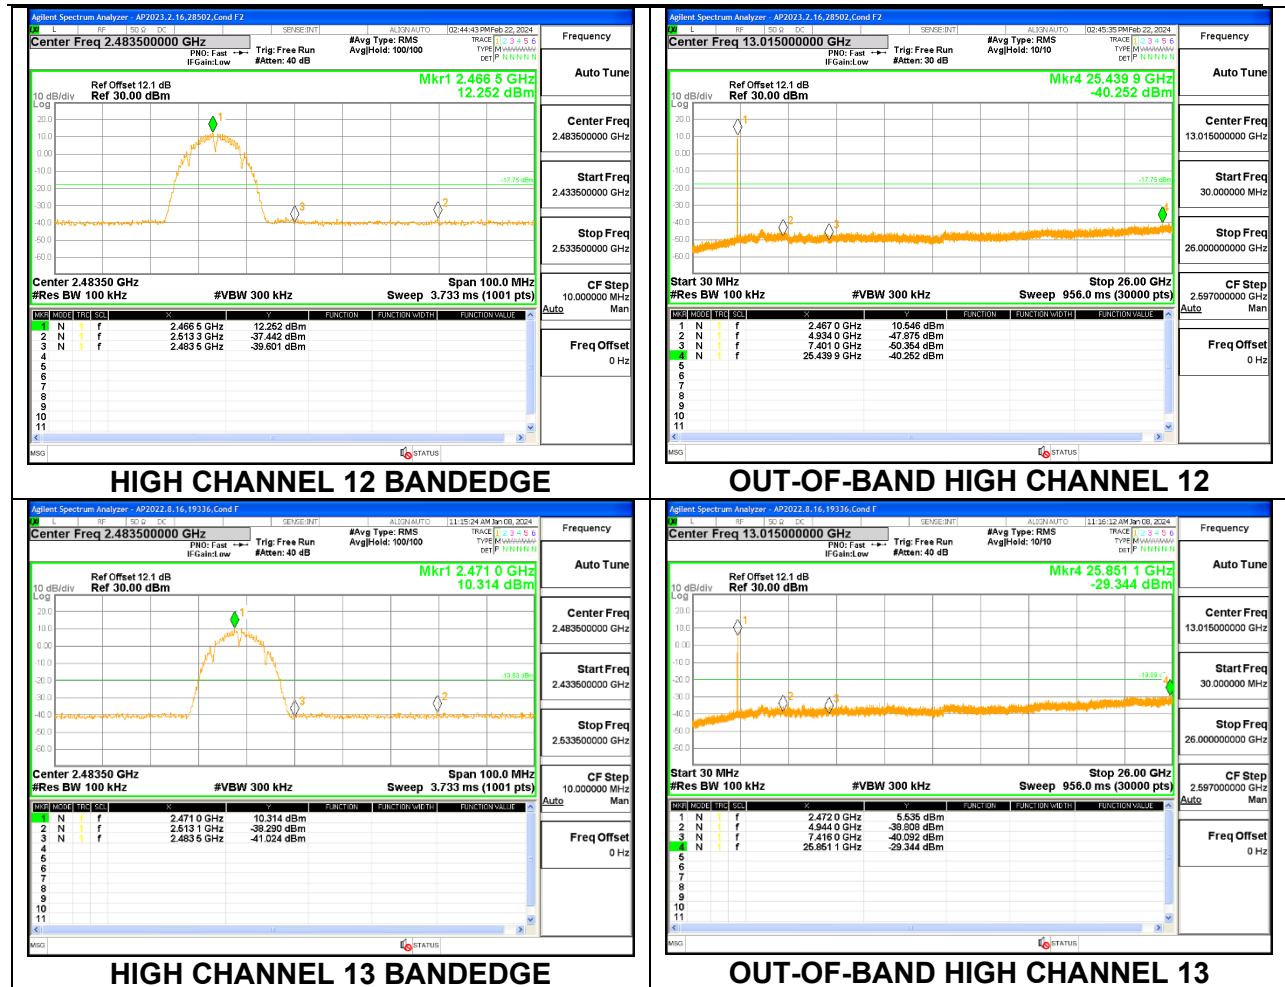

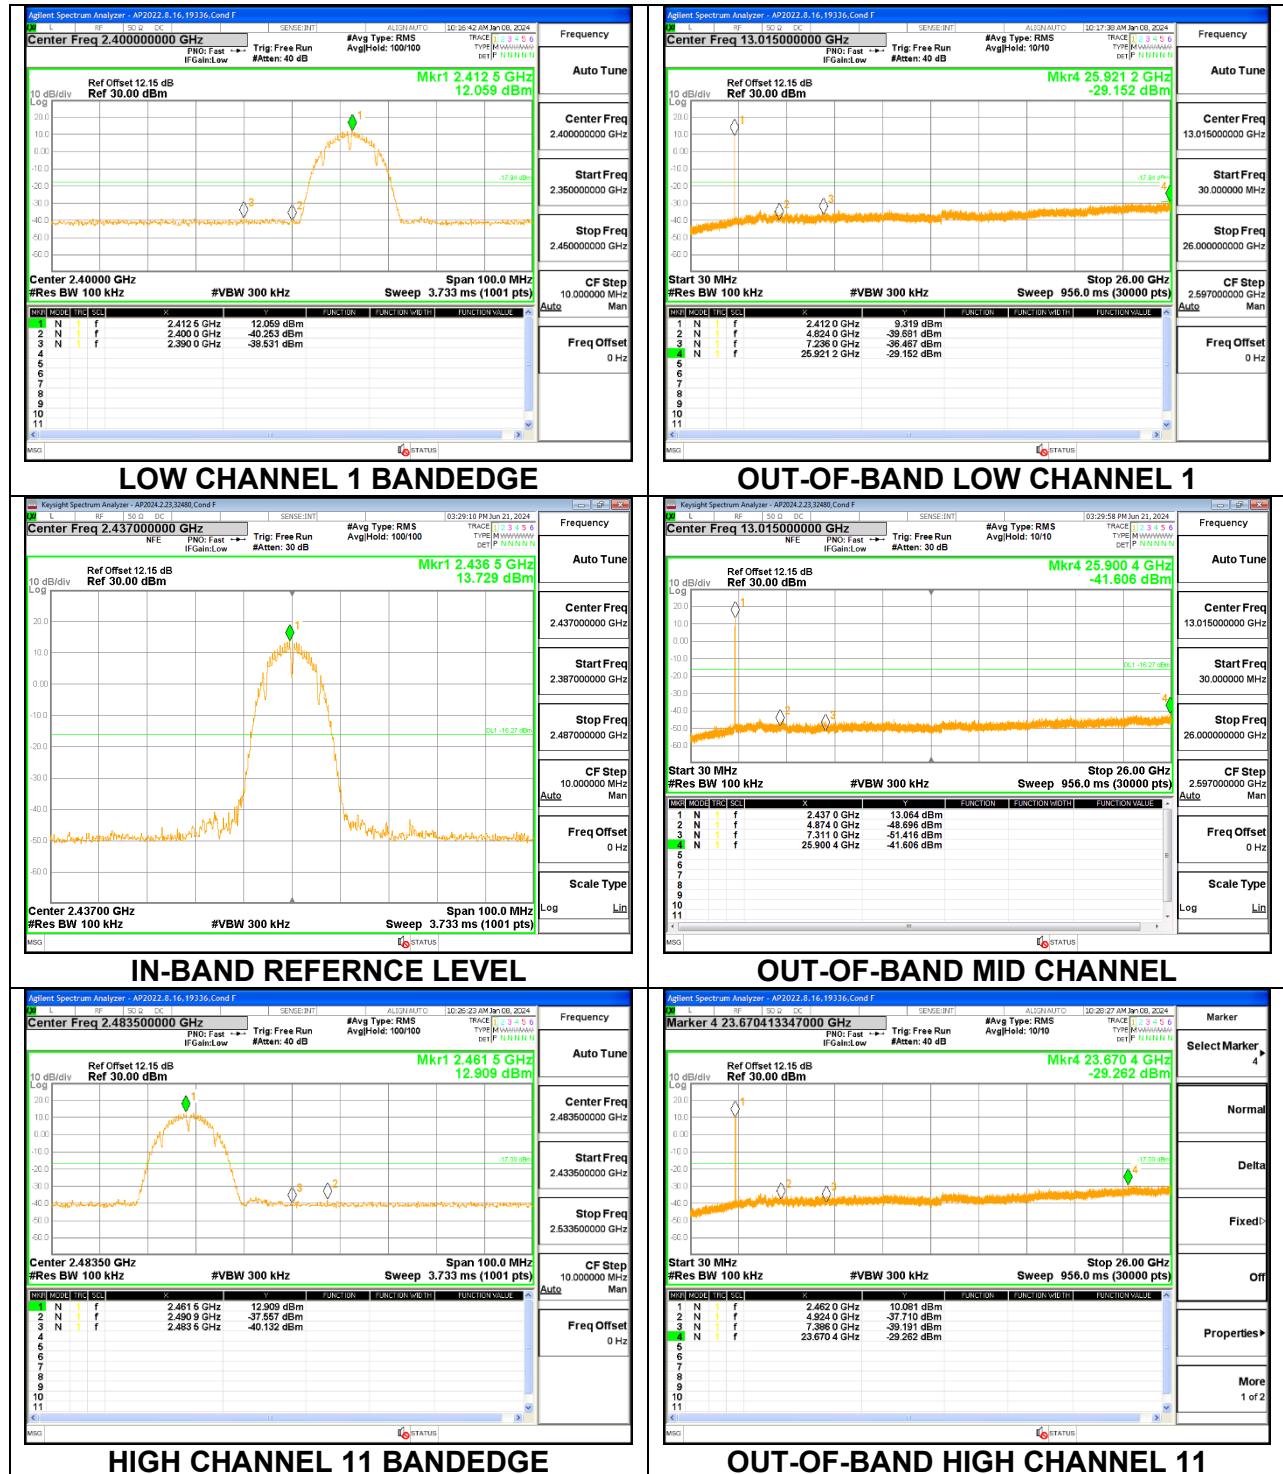1TX ANT 3 MODE

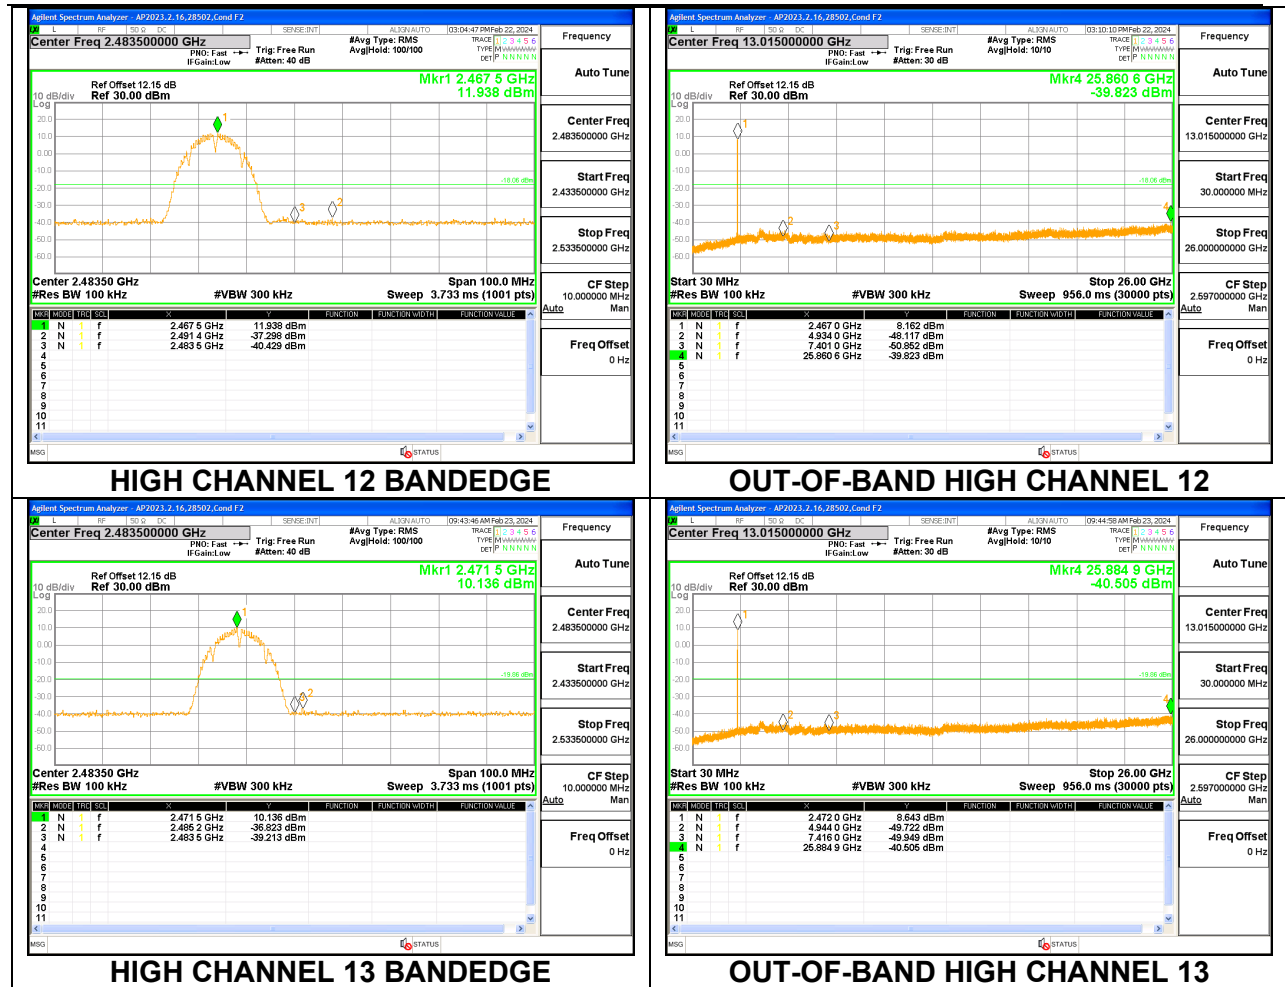

9.6.2. 802.11n HT20 SISO MODE

1TX ANT 4 MODE

