


BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

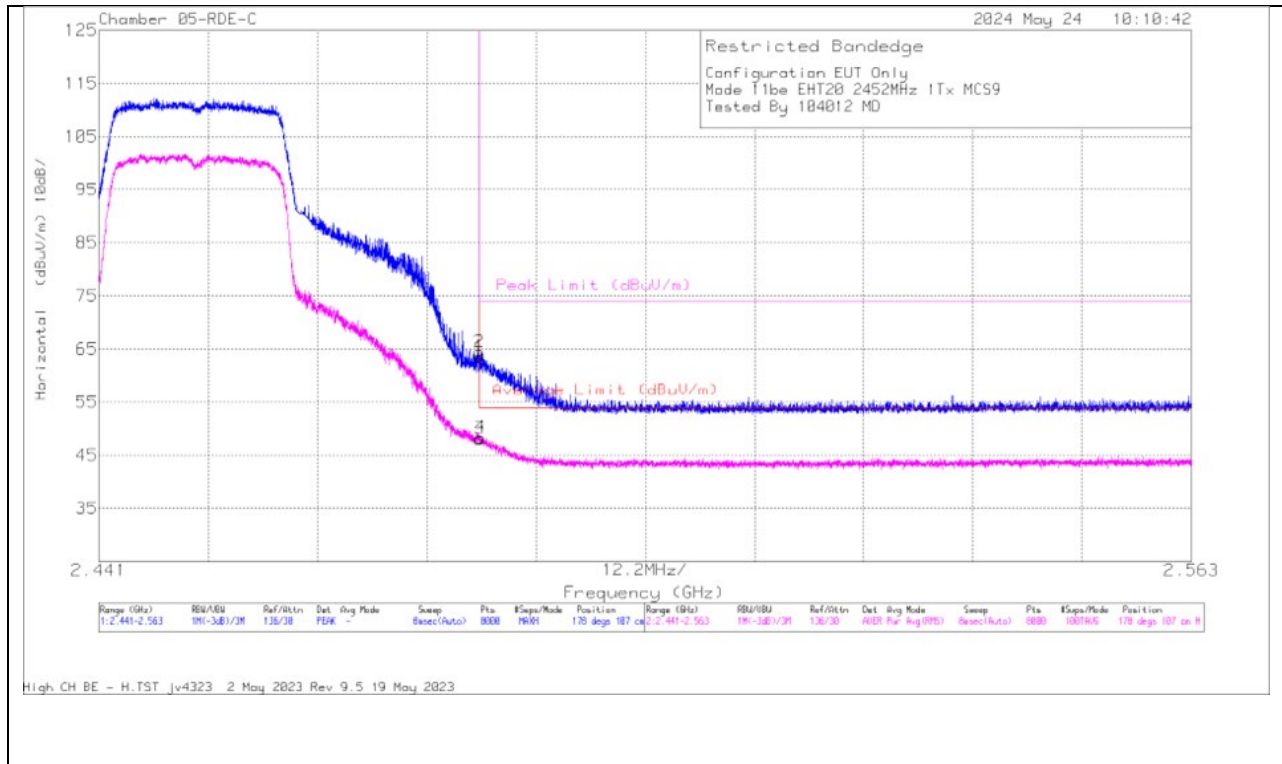

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	71.52	Pk	32.4	0	-40.45	63.47	-	-	74	-10.53	178	107	H
3	2.4835	55.59	RMS	32.4	.57	-40.45	48.11	54	-5.89	-	-	178	107	H
2	2.483523	72.5	Pk	32.4	0	-40.45	64.45	-	-	74	-9.55	178	107	H
4	2.48366	55.8	RMS	32.4	.57	-40.43	48.34	54	-5.66	-	-	178	107	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

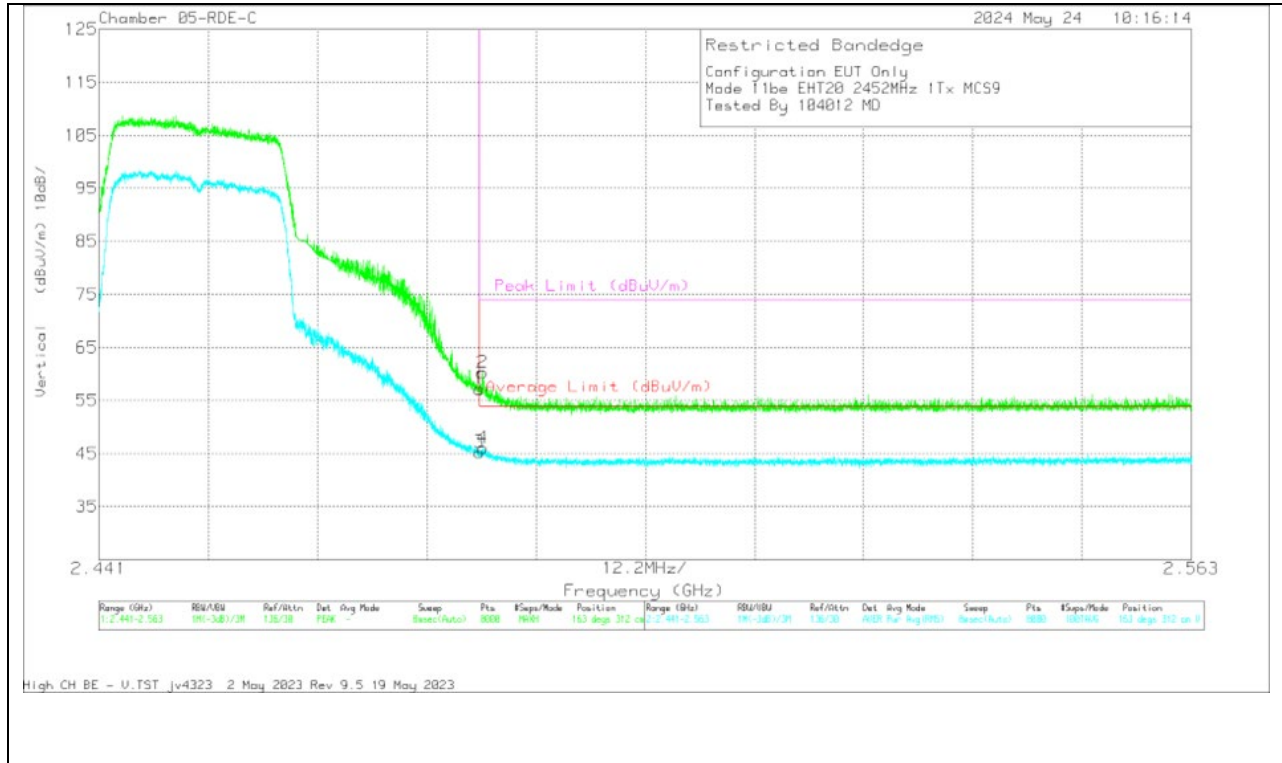


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	65.25	Pk	32.4	0	-40.45	57.2	-	-	74	-16.8	163	312	V
3	2.4835	52.72	RMS	32.4	.57	-40.45	45.24	54	-8.76	-	-	163	312	V
2	2.483828	68.3	Pk	32.4	0	-40.42	60.28	-	-	74	-13.72	163	312	V
4	2.483843	53.48	RMS	32.4	.57	-40.42	46.03	54	-7.97	-	-	163	312	V

PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

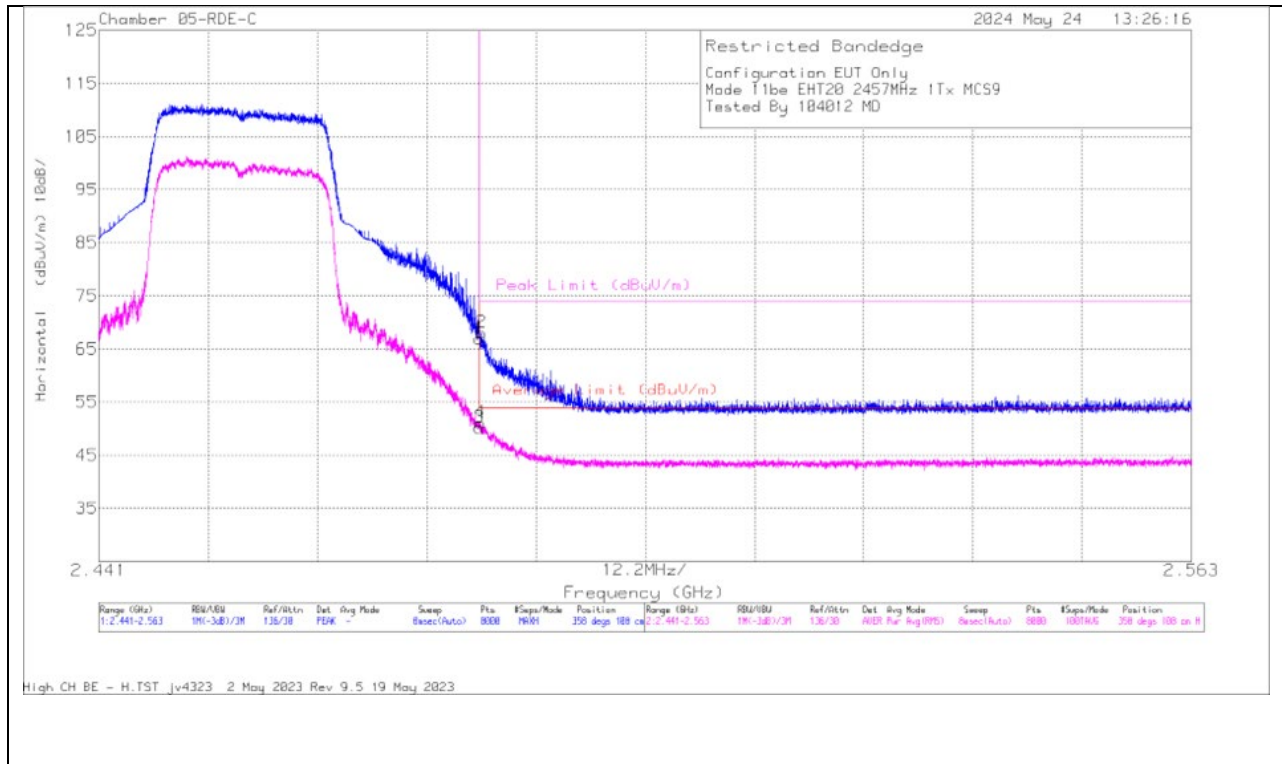

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	75.04	Pk	32.4	0	-40.45	66.99	-	-	74	-7.01	358	108	H
3	2.4835	57.69	RMS	32.4	.57	-40.45	50.21	54	-3.79	-	-	358	108	H
4	2.483553	58.6	RMS	32.4	.57	-40.44	51.13	54	-2.87	-	-	358	108	H
2	2.483706	76.13	Pk	32.4	0	-40.43	68.1	-	-	74	-5.9	358	108	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

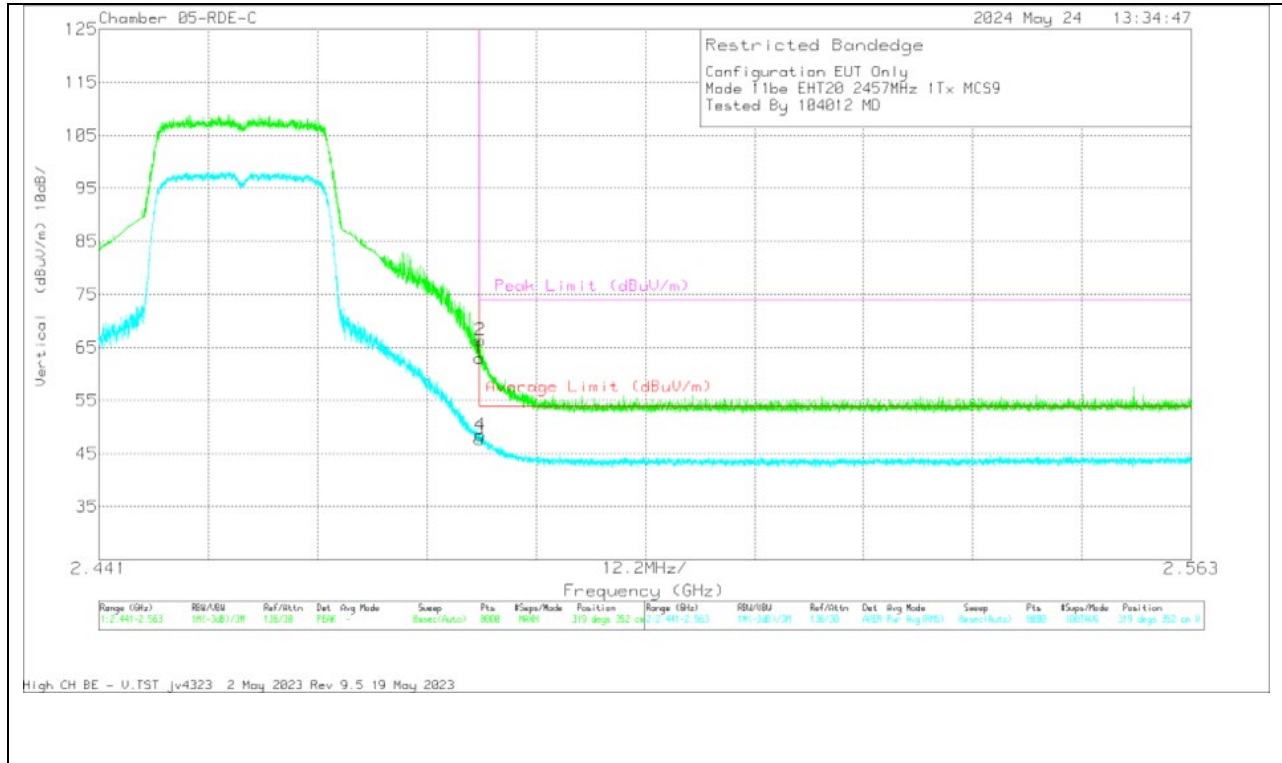


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	71.08	Pk	32.4	0	-40.45	63.03	-	-	74	-10.97	319	352	V
3	2.4835	55.15	RMS	32.4	.57	-40.45	47.67	54	-6.33	-	-	319	352	V
2	2.483614	74.43	Pk	32.4	0	-40.44	66.39	-	-	74	-7.61	319	352	V
4	2.483614	55.95	RMS	32.4	.57	-40.44	48.48	54	-5.52	-	-	319	352	V

PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

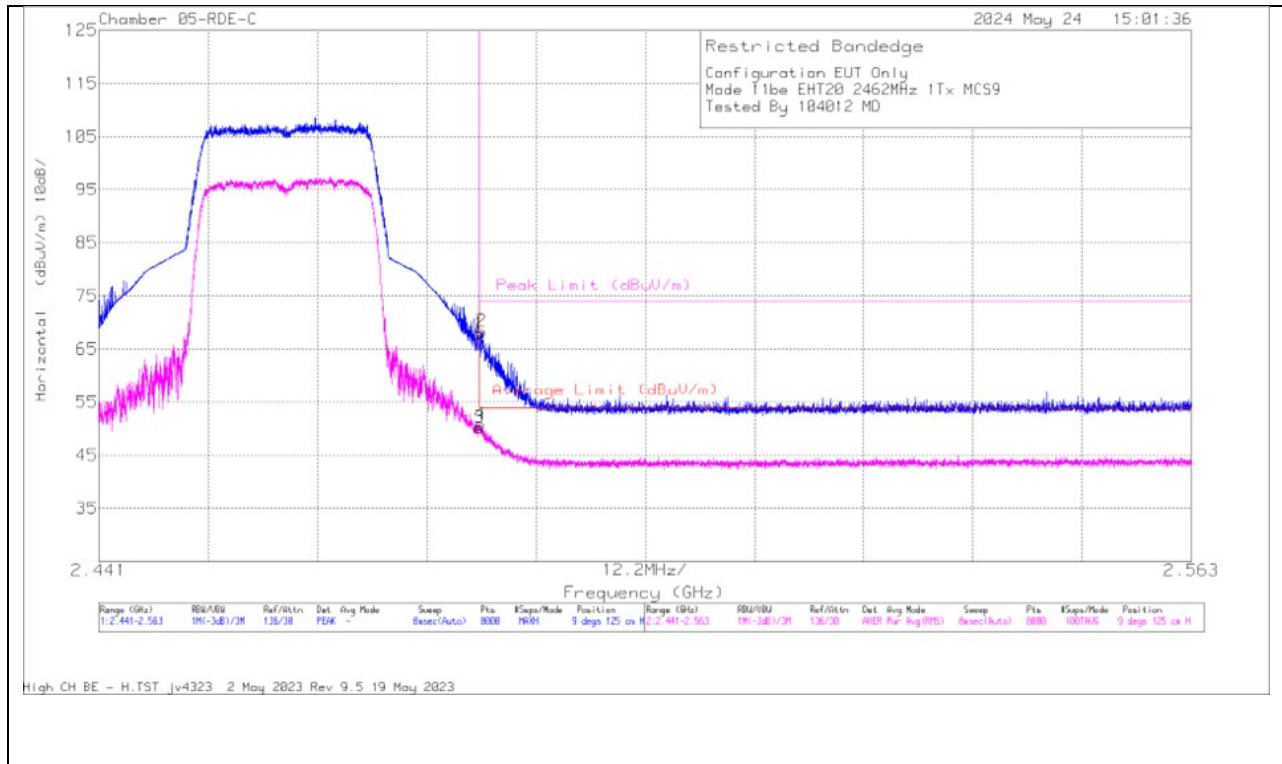

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	75.95	Pk	32.4	0	-40.45	67.9	-	-	74	-6.1	9	125	H
3	2.4835	57.73	RMS	32.4	.57	-40.45	50.25	54	-3.75	-	-	9	125	H
4	2.483553	58.29	RMS	32.4	.57	-40.44	50.82	54	-3.18	-	-	9	125	H
2	2.48369	76.34	Pk	32.4	0	-40.43	68.31	-	-	74	-5.69	9	125	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

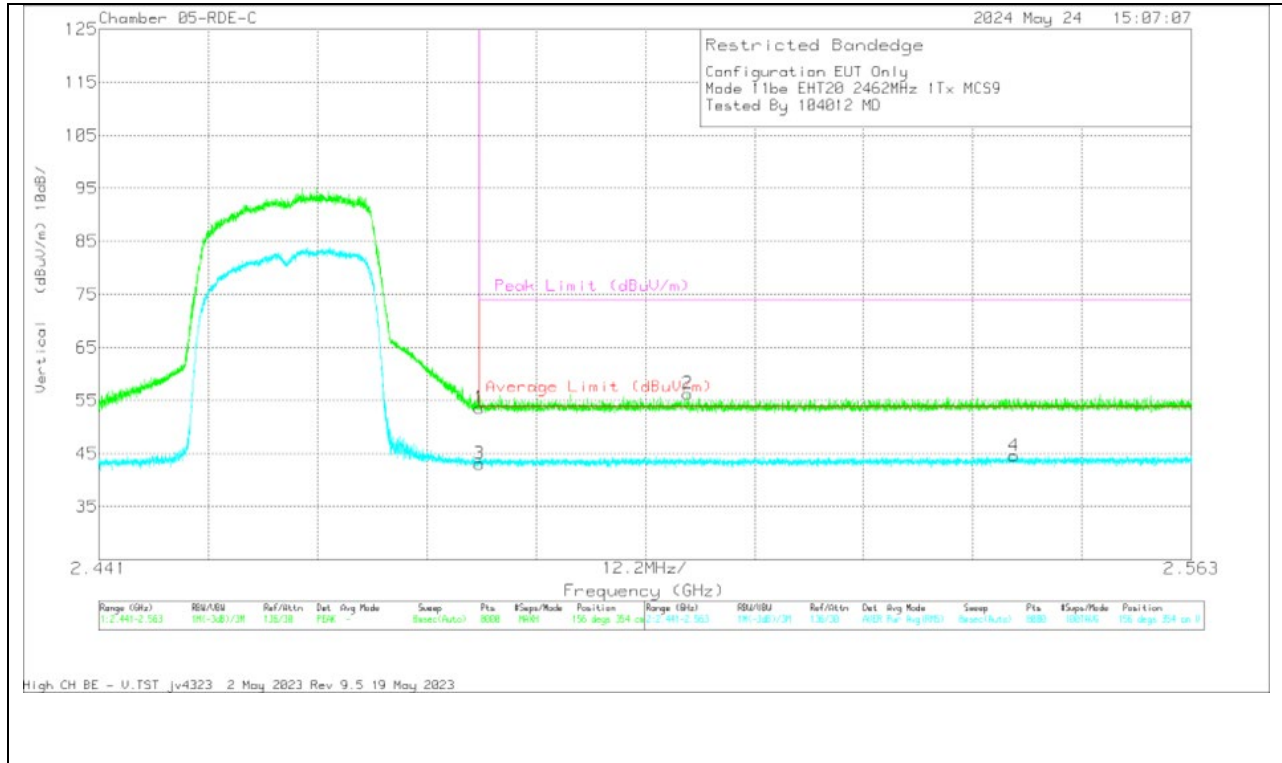


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	61.64	Pk	32.4	0	-40.45	53.59	-	-	74	-20.41	156	354	V
3	2.4835	50.56	RMS	32.4	.57	-40.45	43.08	54	-10.92	-	-	156	354	V
2	2.506736	64.22	Pk	32.5	0	-40.4	56.32	-	-	74	-17.68	156	354	V
4	2.543173	51.73	RMS	32.6	.57	-40.3	44.6	54	-9.4	-	-	156	354	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

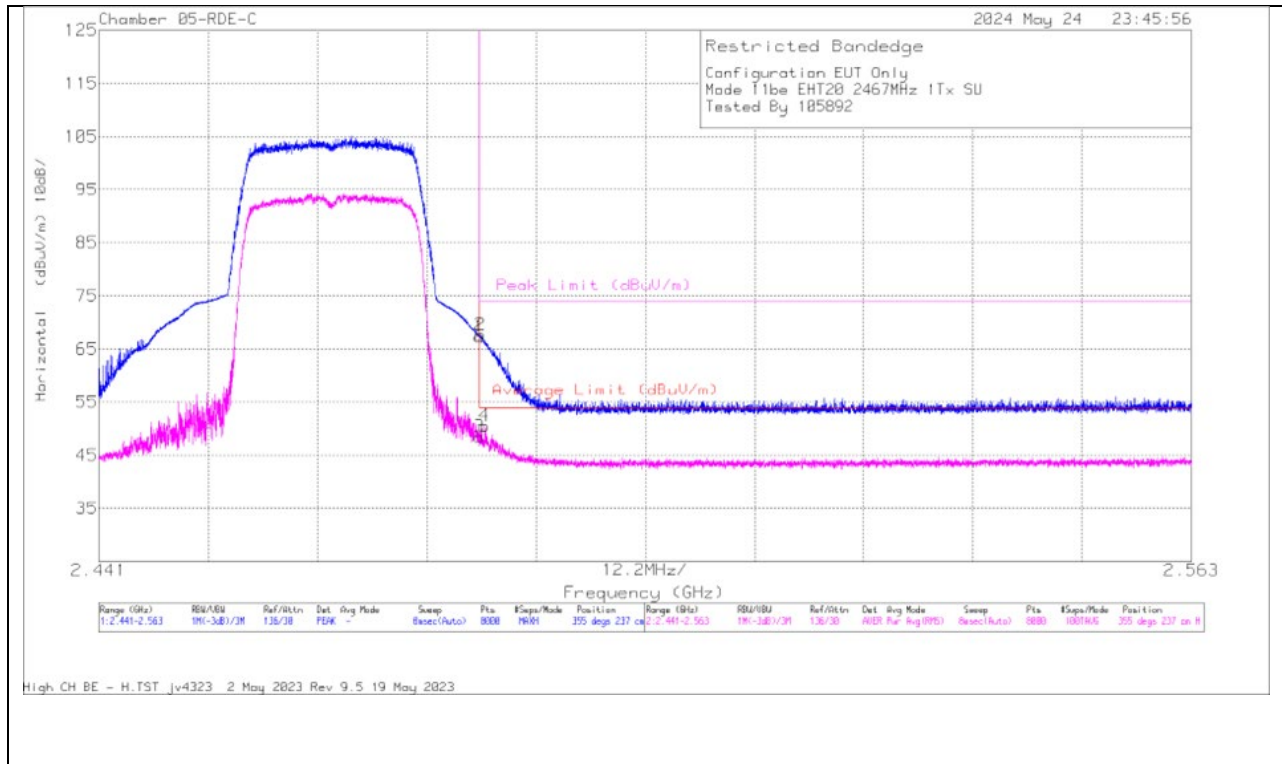

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	75.34	Pk	32.4	0	-40.45	67.29	-	-	74	-6.71	355	237	H
3	2.4835	55.92	RMS	32.4	.57	-40.45	48.44	54	-5.56	-	-	355	237	H
2	2.483599	75.68	Pk	32.4	0	-40.44	67.64	-	-	74	-6.36	355	237	H
4	2.484087	57.97	RMS	32.4	.57	-40.4	50.54	54	-3.46	-	-	355	237	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

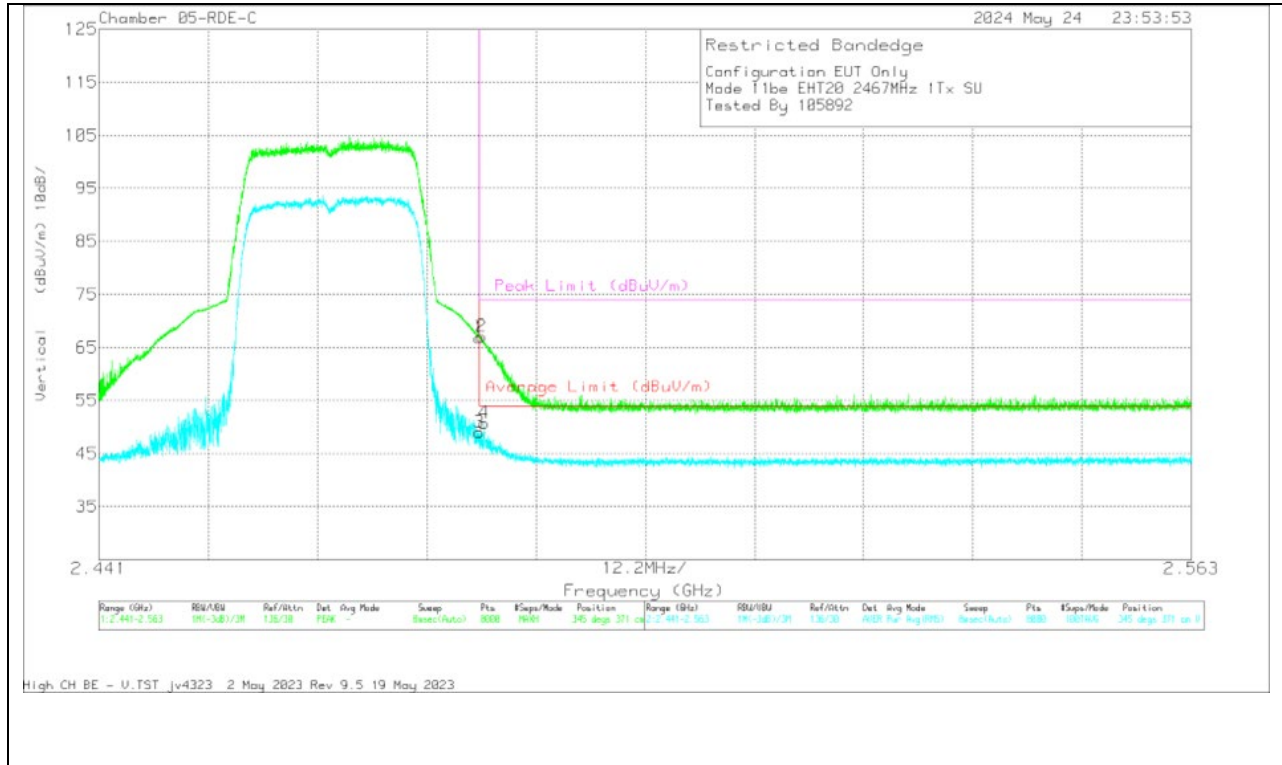


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	74.86	Pk	32.4	0	-40.45	66.81	-	-	74	-7.19	345	371	V
3	2.4835	56.47	RMS	32.4	.57	-40.45	48.99	54	-5.01	-	-	345	371	V
2	2.48369	75.1	Pk	32.4	0	-40.43	67.07	-	-	74	-6.93	345	371	V
4	2.484011	58.18	RMS	32.4	.57	-40.4	50.75	54	-3.25	-	-	345	371	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

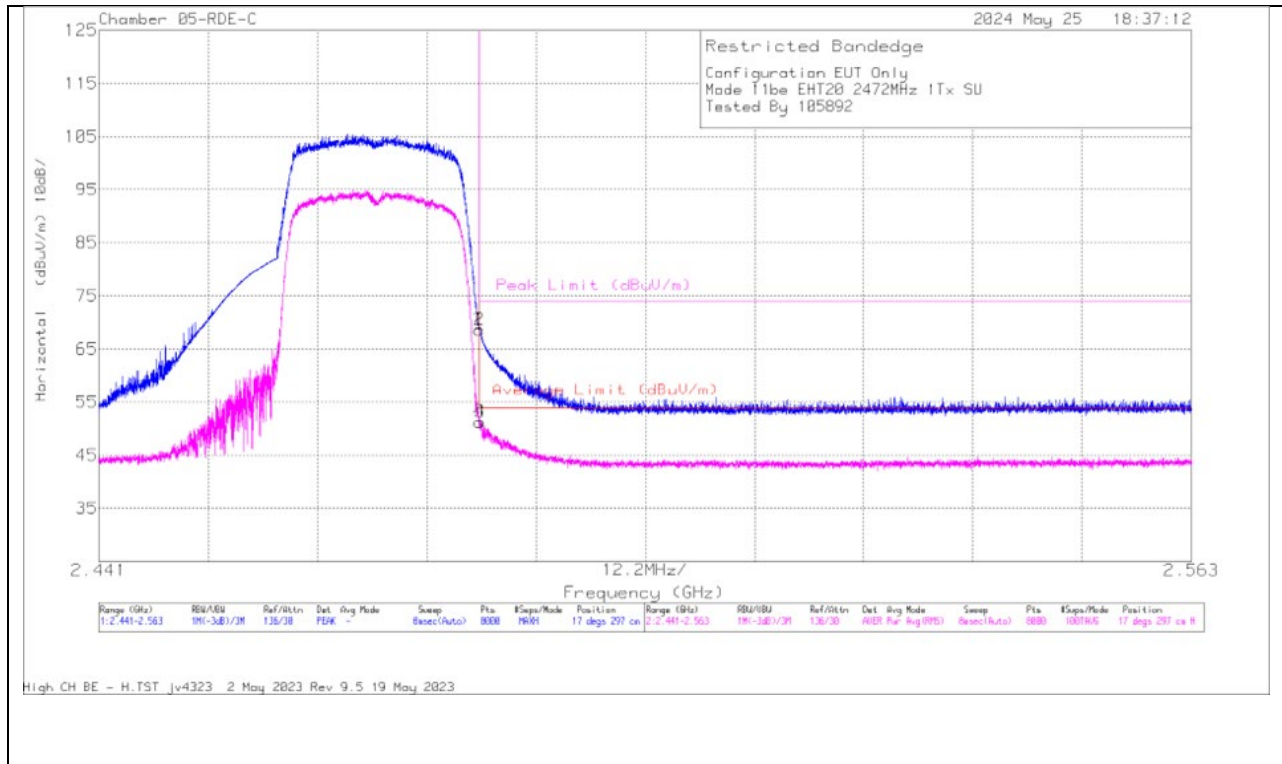

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	76.58	Pk	32.4	0	-40.45	68.53	-	-	74	-5.47	17	297	H
3	2.4835	58.77	RMS	32.4	.57	-40.45	51.29	54	-2.71	-	-	17	297	H
2	2.483507	76.67	Pk	32.4	0	-40.45	68.62	-	-	74	-5.38	17	297	H
4	2.483538	58.75	RMS	32.4	.57	-40.45	51.27	54	-2.73	-	-	17	297	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

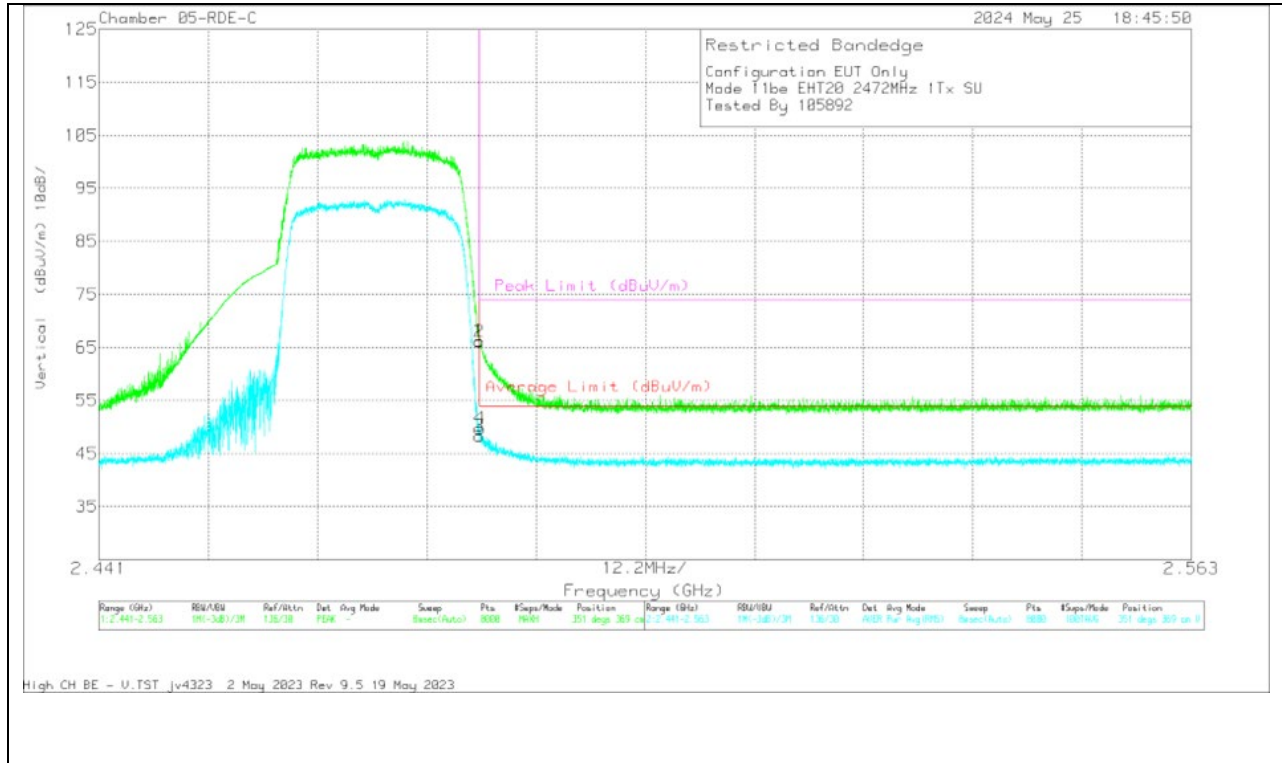


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	74.25	Pk	32.4	0	-40.45	66.2	-	-	74	-7.8	351	369	V
3	2.4835	55.76	RMS	32.4	.57	-40.45	48.28	54	-5.72	-	-	351	369	V
2	2.483507	74.12	Pk	32.4	0	-40.45	66.07	-	-	74	-7.93	351	369	V
4	2.483538	57.22	RMS	32.4	.57	-40.45	49.74	54	-4.26	-	-	351	369	V

Pk - Peak detector
RMS - RMS detection

1TX ANT 3 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

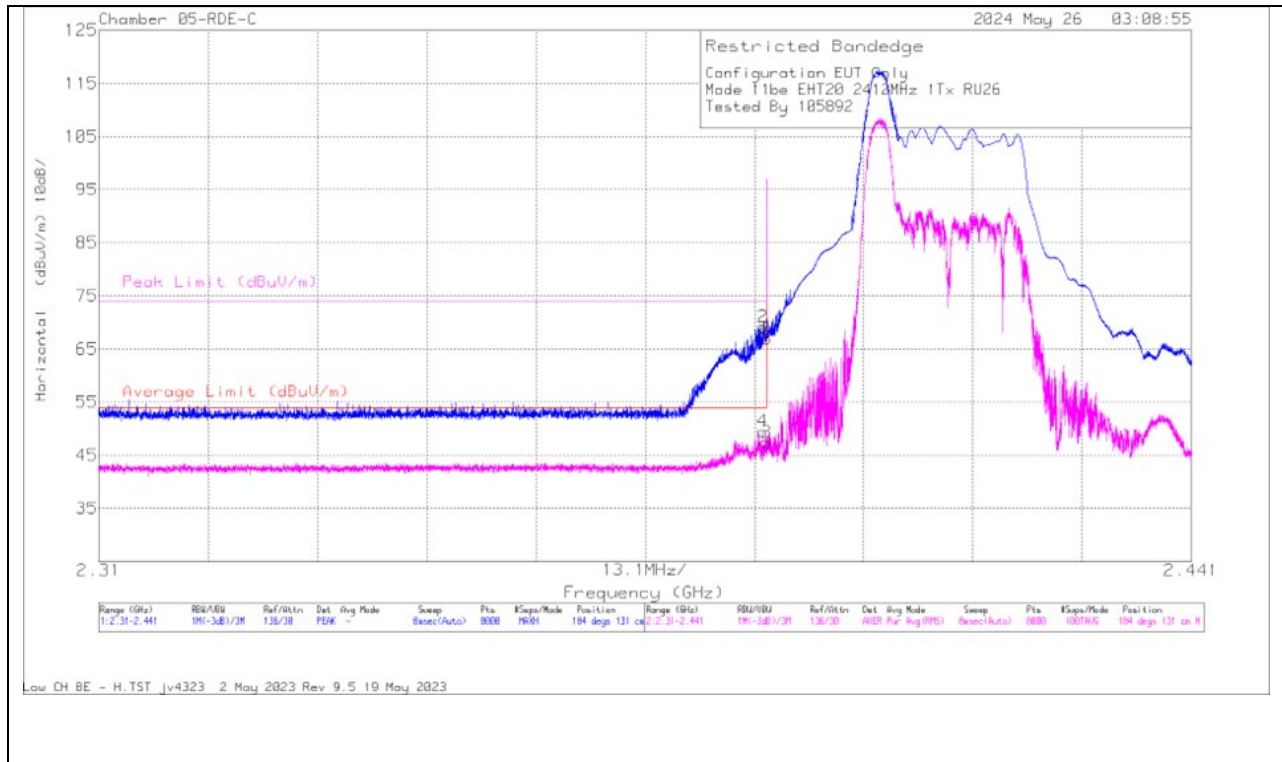

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.389576	57.25	RMS	32.1	.59	-40.5	49.44	54	-4.56	-	-	184	131	H
2	2.389674	77.52	Pk	32.1	0	-40.5	69.12	-	-	74	-4.88	184	131	H
1	2.39	75.31	Pk	32.1	0	-40.5	66.91	-	-	74	-7.09	184	131	H
3	2.39	55.22	RMS	32.1	.59	-40.5	47.41	54	-6.59	-	-	184	131	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

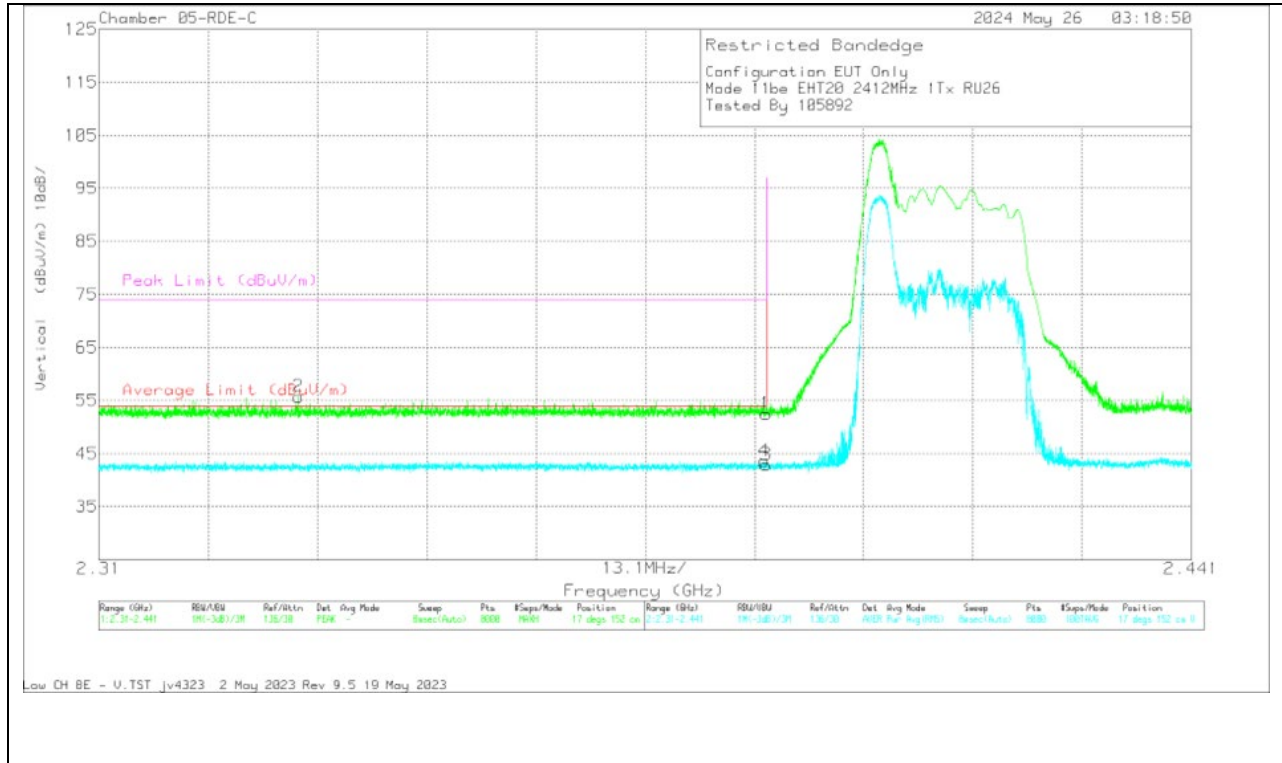


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.33396	64.23	Pk	31.9	0	-40.4	55.73	-	-	74	-18.27	17	152	V
4	2.38974	51.39	RMS	32.1	.59	-40.5	43.58	54	-10.42	-	-	17	152	V
1	2.39	60.91	Pk	32.1	0	-40.5	52.51	-	-	74	-21.49	17	152	V
3	2.39	50.72	RMS	32.1	.59	-40.5	42.91	54	-11.09	-	-	17	152	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

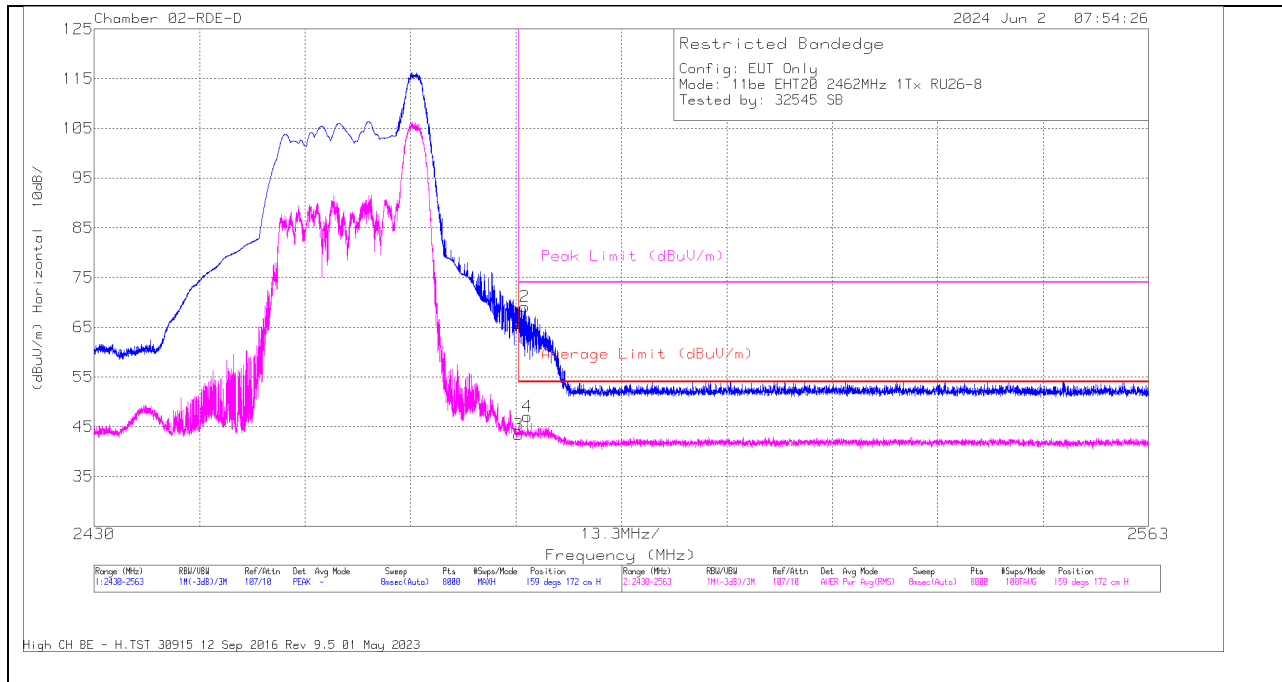

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.95	PK	32.4	-19.6	0	65.75	-	-	74	-8.25	159	172	H
2	* 2484.304	56.36	PK	32.4	-19.6	0	69.16	-	-	74	-4.84	159	172	H
3	* 2483.5	30.01	RMS	32.4	-19.6	.59	43.40	54	-10.60	-	-	159	172	H
4	* 2484.62	33.56	RMS	32.4	-19.5	.59	47.05	54	-6.95	-	-	159	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

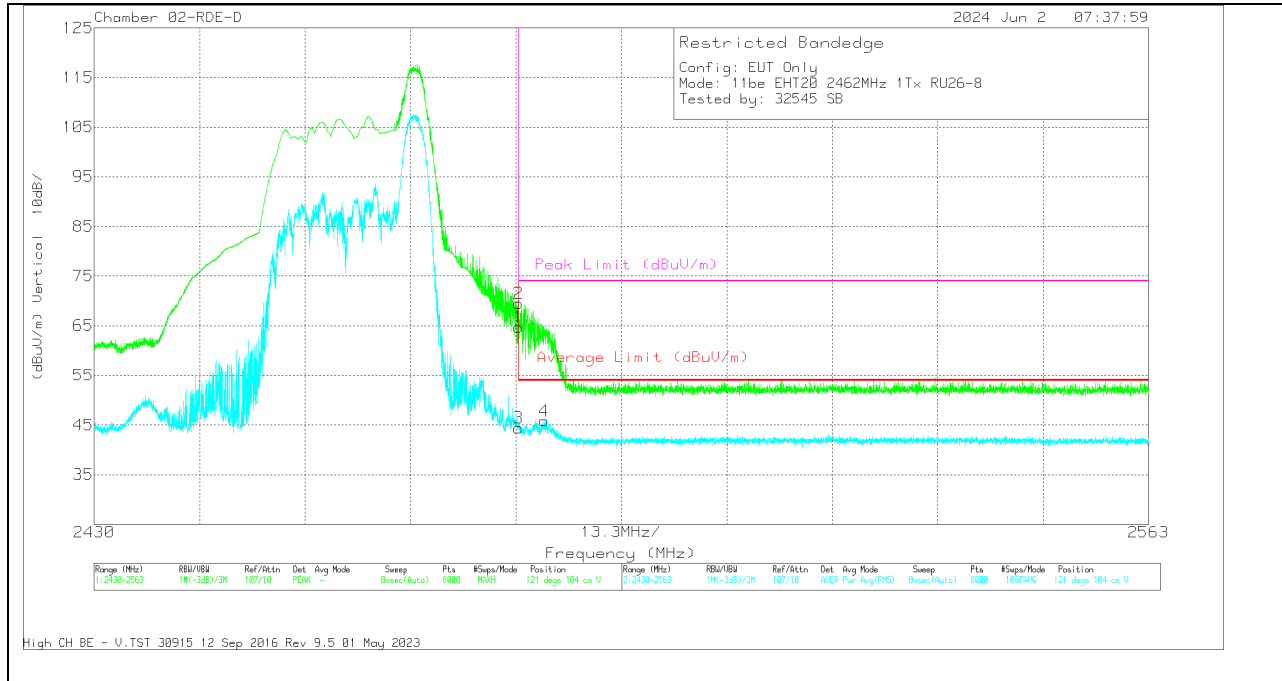


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.94	Pk	32.4	-19.6	0	64.74	-	-	74	-9.26	121	104	V
2	* 2483.522	56.67	Pk	32.4	-19.6	0	69.47	-	-	74	-4.53	121	104	V
3	* 2483.5	31.03	RMS	32.4	-19.6	.59	44.42	54	-9.58	-	-	121	104	V
4	* 2486.798	32.36	RMS	32.4	-19.5	.59	45.85	54	-8.15	-	-	121	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

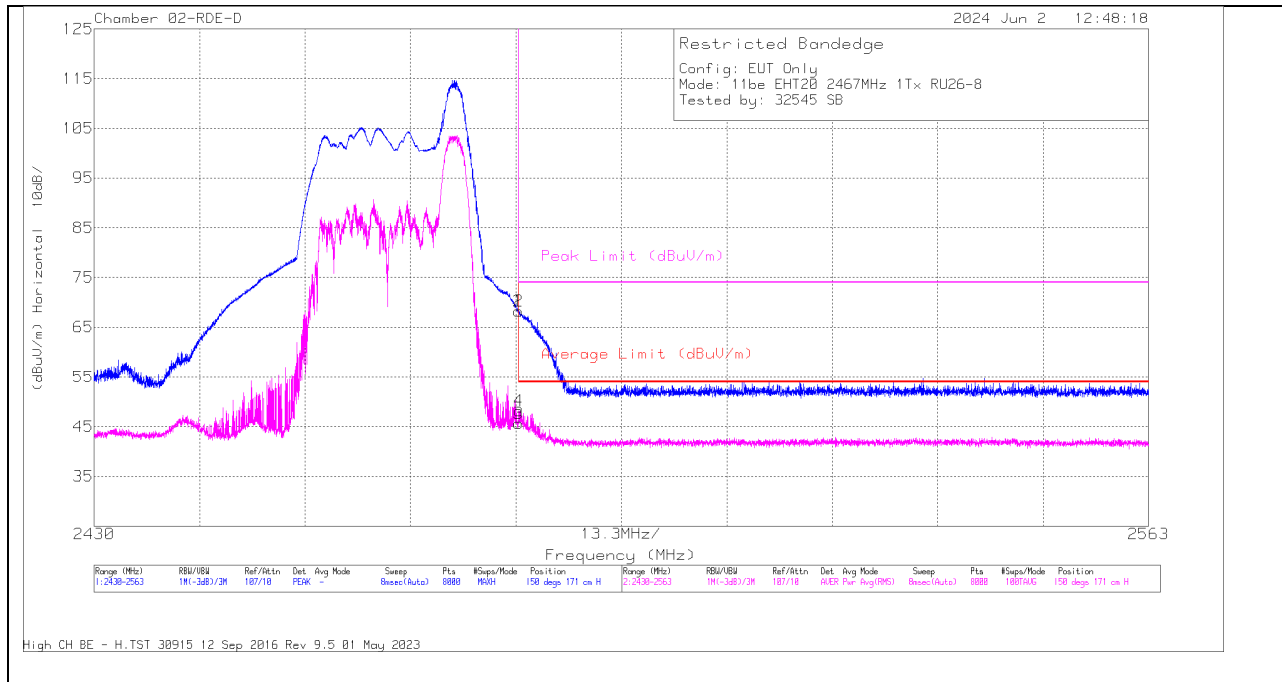

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.42	Pk	32.4	-19.6	0	68.22	-	-	74	-5.78	150	171	H
3	* 2483.5	32.29	RMS	32.4	-19.6	.59	45.68	54	-8.32	-	-	150	171	H
2	* 2483.506	55.41	Pk	32.4	-19.6	0	68.21	-	-	74	-5.79	150	171	H
4	* 2483.572	34.81	RMS	32.4	-19.6	.59	48.2	54	-5.8	-	-	150	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

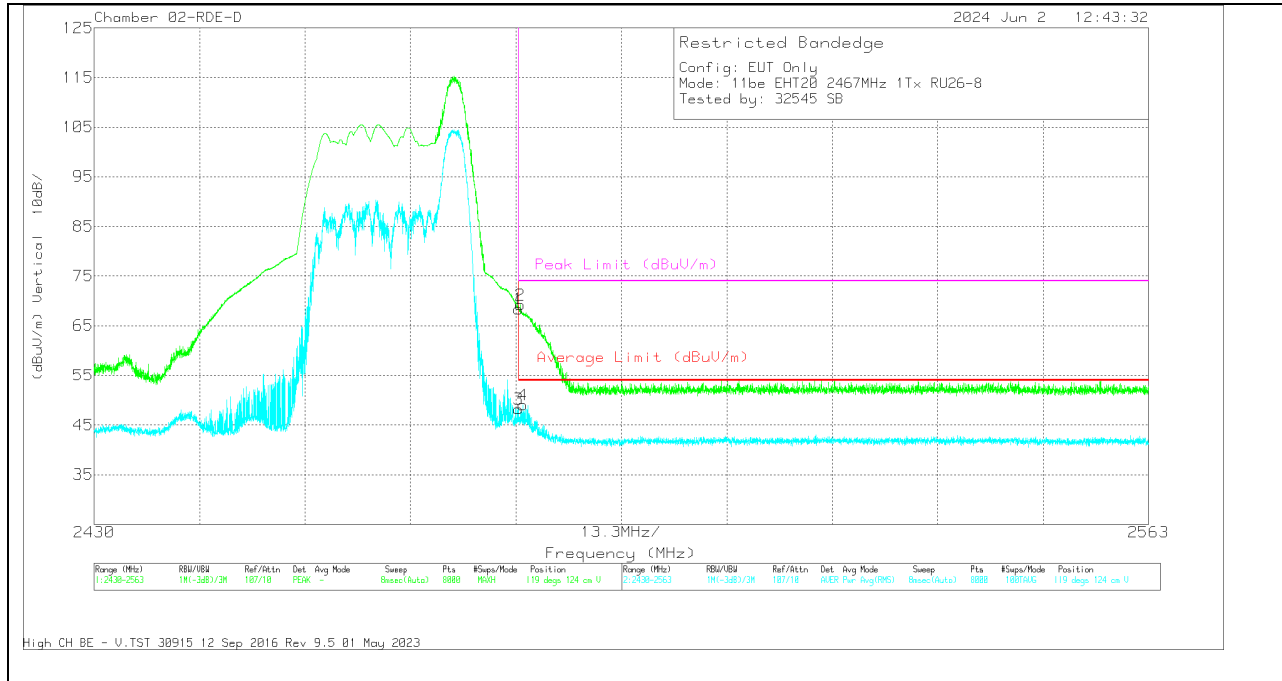


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.6	Pk	32.4	-19.6	0	68.4	-	-	74	-5.6	119	124	V
2	* 2483.772	56.39	Pk	32.4	-19.6	0	69.19	-	-	74	-4.81	119	124	V
3	* 2483.5	34.85	RMS	32.4	-19.6	.59	48.24	54	-5.76	-	-	119	124	V
4	* 2484.088	35.62	RMS	32.4	-19.6	.59	49.01	54	-4.99	-	-	119	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

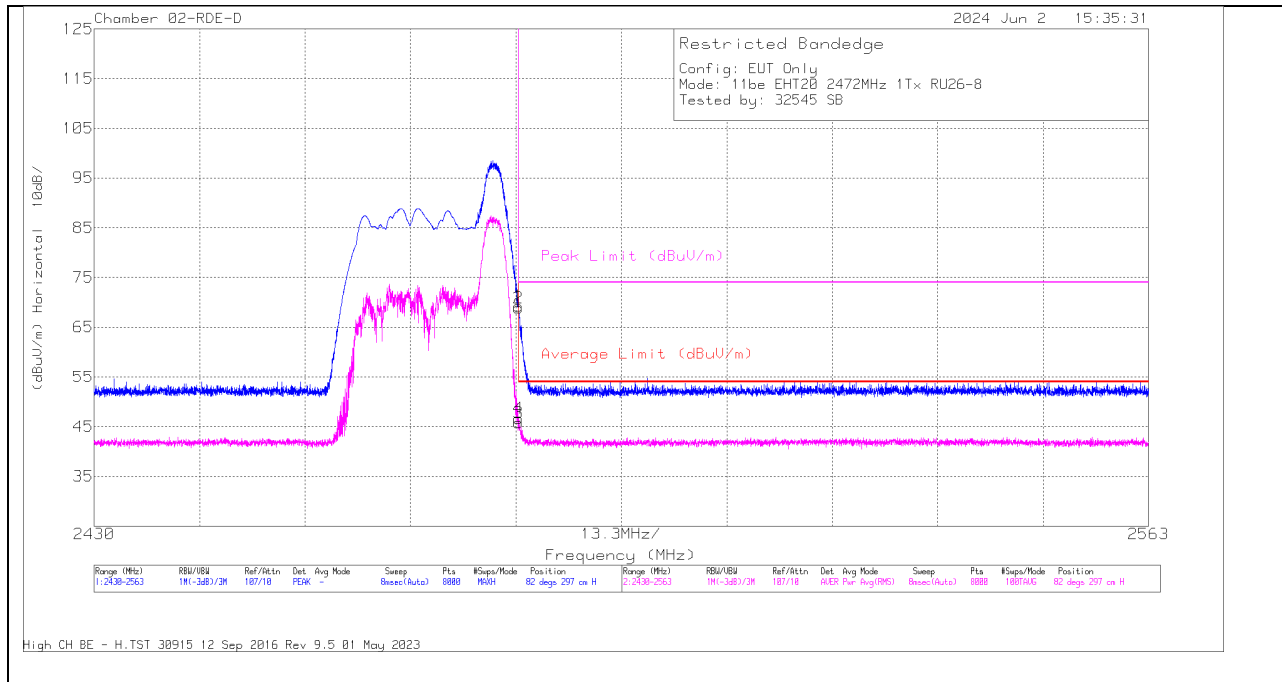

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	56.5	Pk	32.4	-19.6	0	69.3	-	-	74	-4.7	82	297	H
2	* 2483.522	56.12	Pk	32.4	-19.6	0	68.92	-	-	74	-5.08	82	297	H
3	* 2483.5	32.43	RMS	32.4	-19.6	.59	45.82	54	-8.18	-	-	82	297	H
4	* 2483.522	33.32	RMS	32.4	-19.6	.59	46.71	54	-7.29	-	-	82	297	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

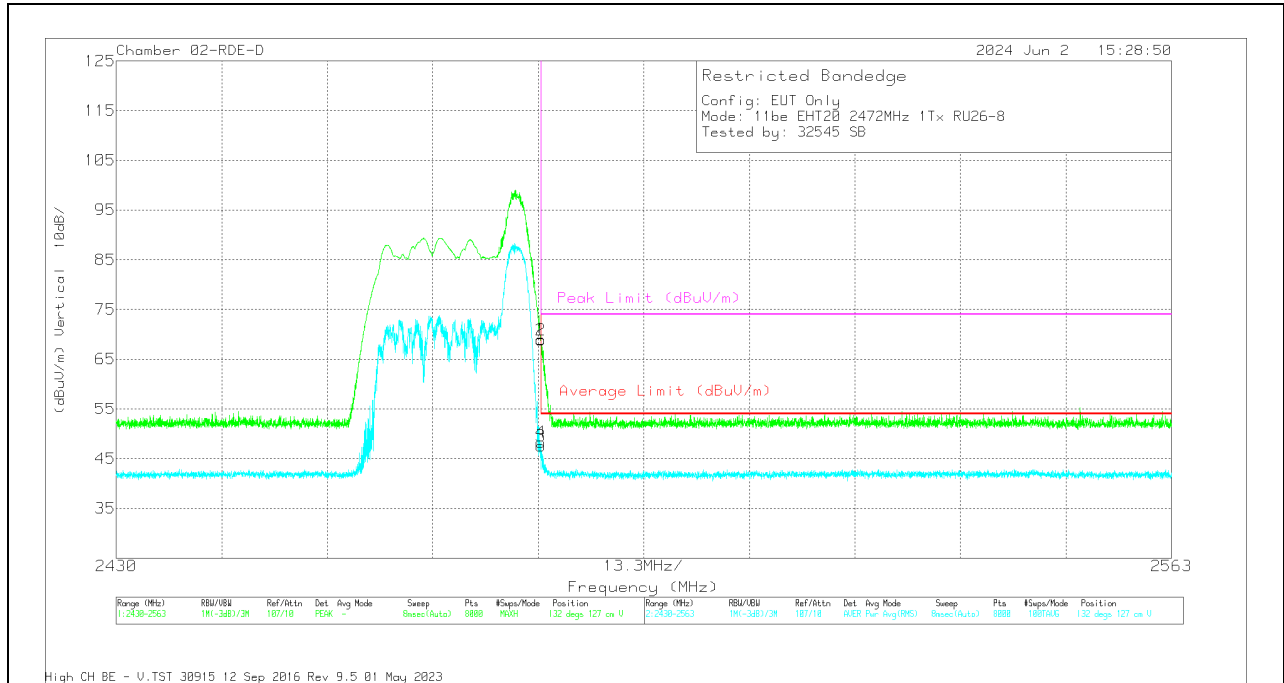

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	56.18	Pk	32.4	-19.6	0	68.98	-	-	74	-5.02	132	127	V
2	* 2483.506	56.05	Pk	32.4	-19.6	0	68.85	-	-	74	-5.15	132	127	V
3	* 2483.5	34.19	RMS	32.4	-19.6	.59	47.58	54	-6.42	-	-	132	127	V
4	* 2483.506	34.97	RMS	32.4	-19.6	.59	48.36	54	-5.64	-	-	132	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANT 3 MODE: SU Mode

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

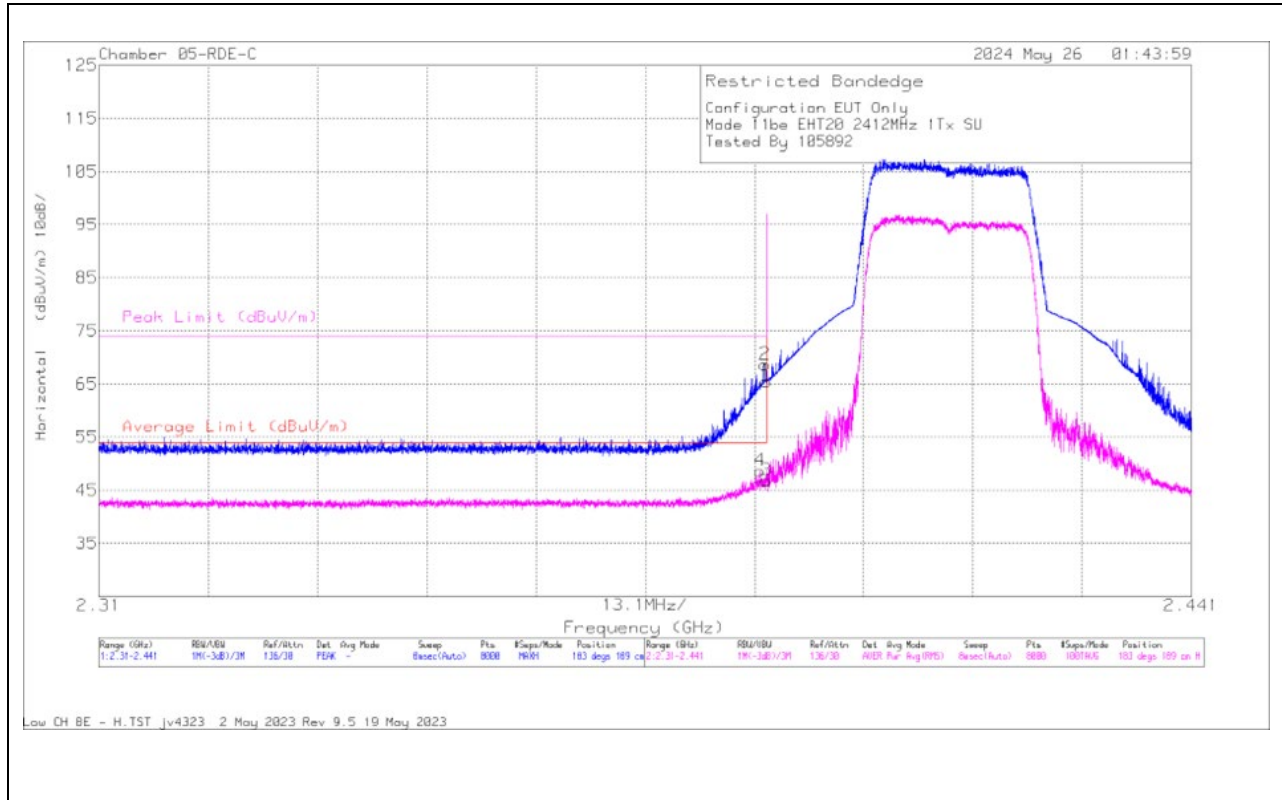

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.389265	56.52	RMS	32.1	.57	-40.5	48.69	54	-5.31	-	-	183	189	H
2	2.389854	77.1	Pk	32.1	0	-40.5	68.7	-	-	74	-5.3	183	189	H
1	2.39	73.91	Pk	32.1	0	-40.5	65.51	-	-	74	-8.49	183	189	H
3	2.39	54.71	RMS	32.1	.57	-40.5	46.88	54	-7.12	-	-	183	189	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

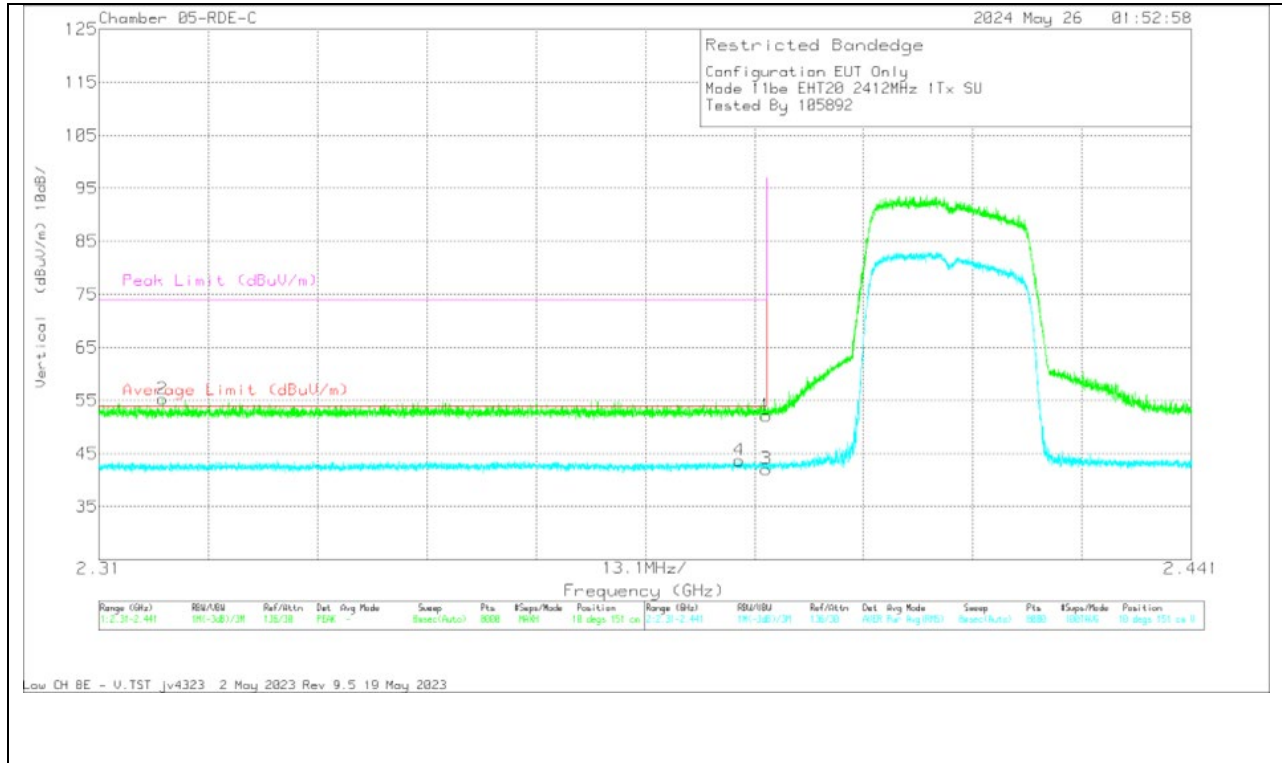


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.317615	63.88	Pk	31.8	0	-40.4	55.28	-	-	74	-18.72	10	151	V
4	2.386759	51.54	RMS	32.1	.57	-40.5	43.71	54	-10.29	-	-	10	151	V
1	2.39	60.56	Pk	32.1	0	-40.5	52.16	-	-	74	-21.84	10	151	V
3	2.39	49.91	RMS	32.1	.57	-40.5	42.08	54	-11.92	-	-	10	151	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

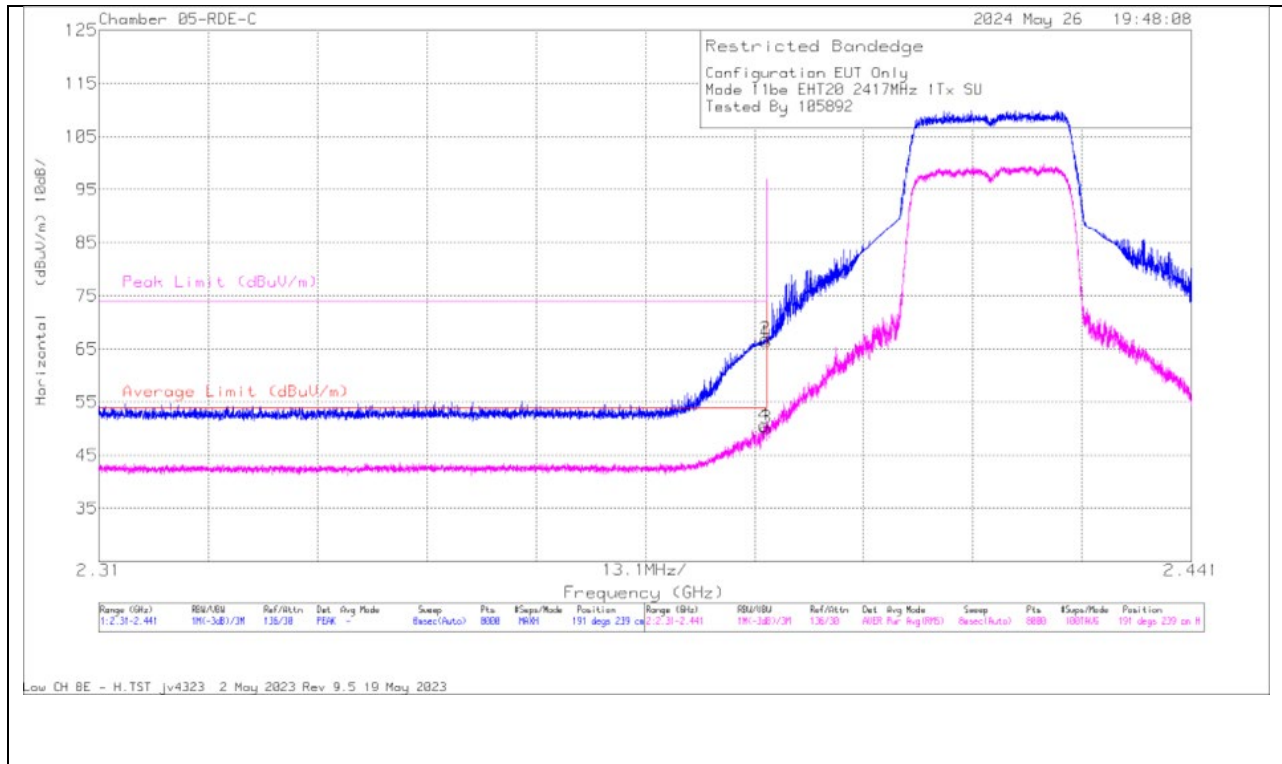

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.389772	58.39	RMS	32.1	.57	-40.5	50.56	54	-3.44	-	-	191	239	H
2	2.389953	75.29	Pk	32.1	0	-40.5	66.89	-	-	74	-7.11	191	239	H
1	2.39	74.7	Pk	32.1	0	-40.5	66.3	-	-	74	-7.7	191	239	H
3	2.39	57.98	RMS	32.1	.57	-40.5	50.15	54	-3.85	-	-	191	239	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

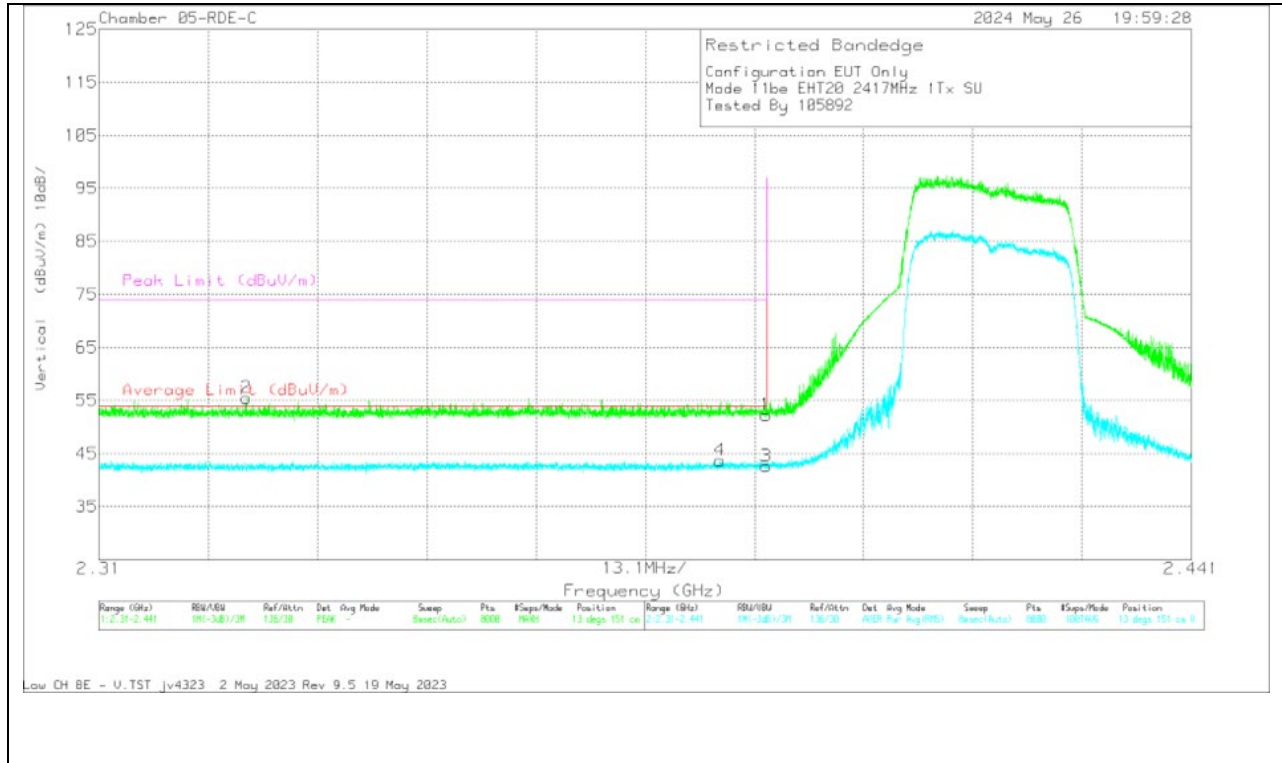


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.327687	63.99	PK	31.9	0	-40.4	55.49	-	-	74	-18.51	13	151	V
4	2.384466	51.54	RMS	32.1	.57	-40.5	43.71	54	-10.29	-	-	13	151	V
1	2.39	60.67	PK	32.1	0	-40.5	52.27	-	-	74	-21.73	13	151	V
3	2.39	50.46	RMS	32.1	.57	-40.5	42.63	54	-11.37	-	-	13	151	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

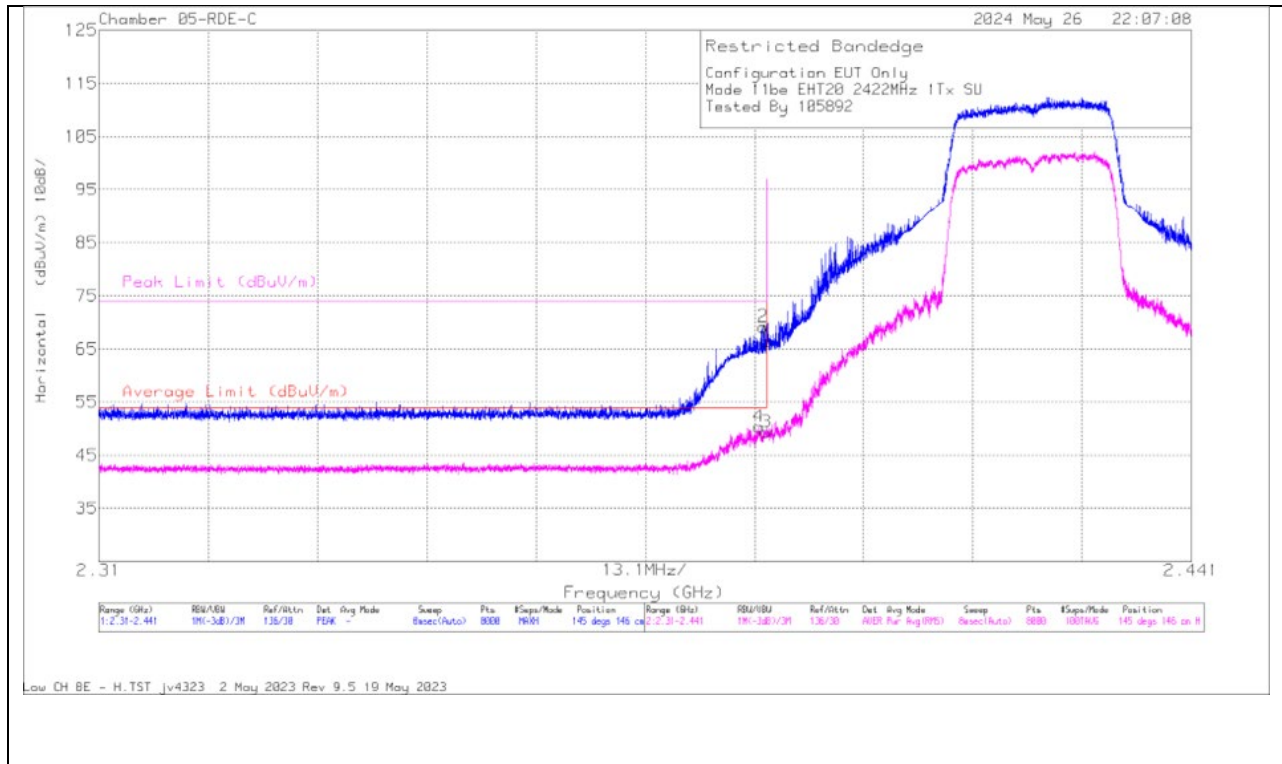

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.389134	58.2	RMS	32.1	.57	-40.5	50.37	54	-3.63	-	-	145	146	H
2	2.389658	77.56	Pk	32.1	0	-40.5	69.16	-	-	74	-4.84	145	146	H
1	2.39	74.7	Pk	32.1	0	-40.5	66.3	-	-	74	-7.7	145	146	H
3	2.39	57.22	RMS	32.1	.57	-40.5	49.39	54	-4.61	-	-	145	146	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

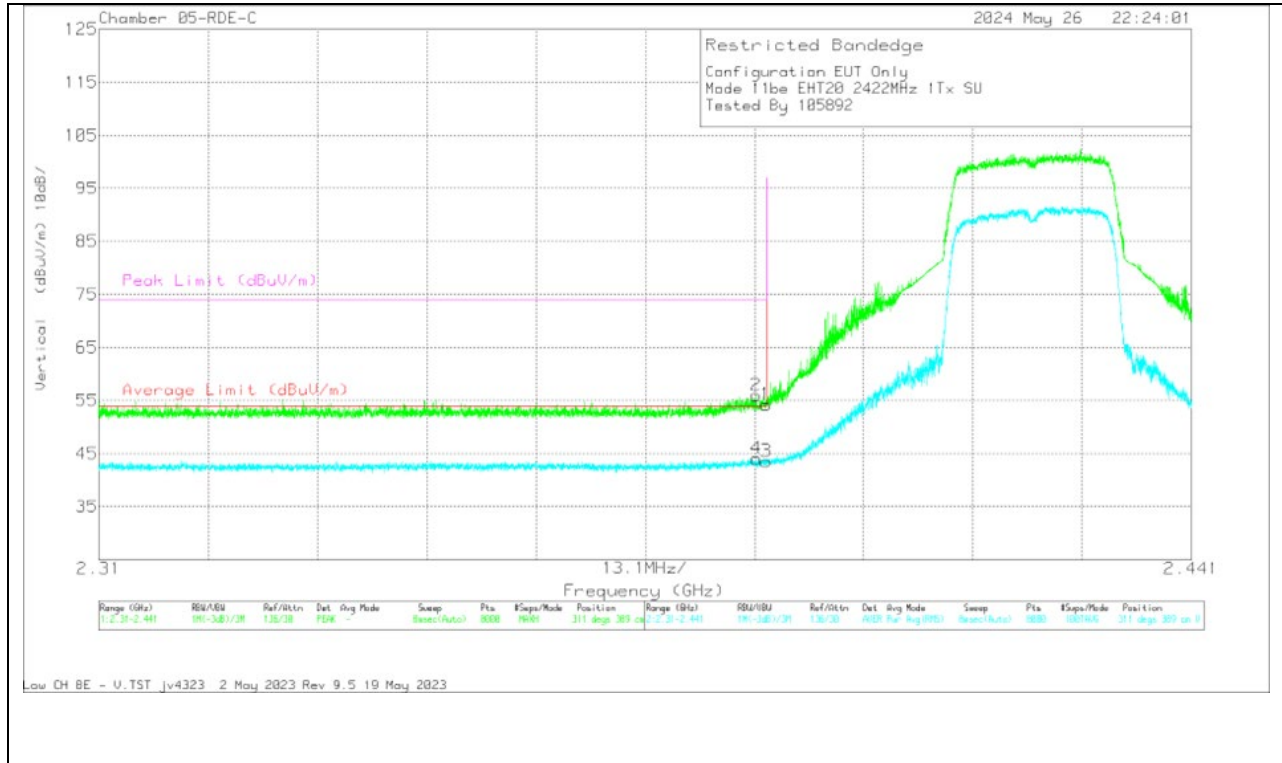


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.38879	64.38	PK	32.1	0	-40.5	55.98	-	-	74	-18.02	311	389	V
4	2.388839	51.9	RMS	32.1	.57	-40.5	44.07	54	-9.93	-	-	311	389	V
1	2.39	62.6	PK	32.1	0	-40.5	54.2	-	-	74	-19.8	311	389	V
3	2.39	51.37	RMS	32.1	.57	-40.5	43.54	54	-10.46	-	-	311	389	V

PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

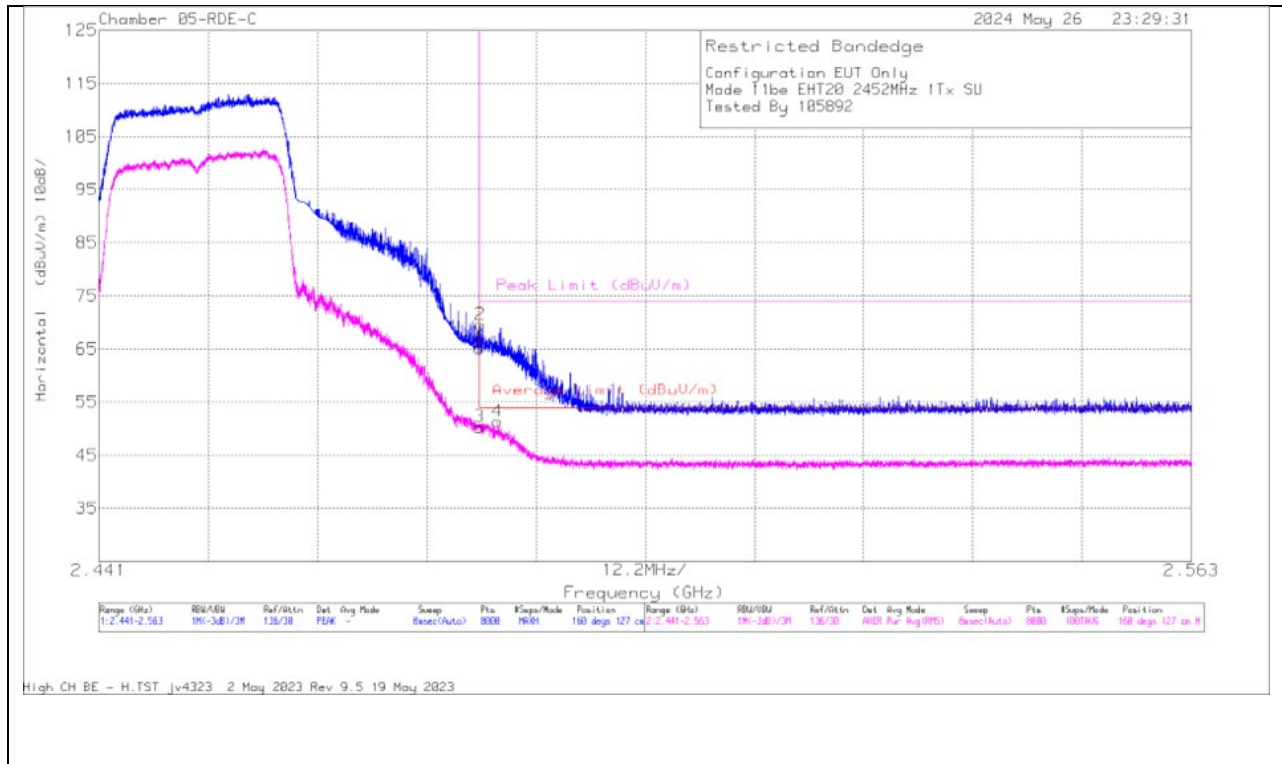

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	73.24	Pk	32.4	0	-40.45	65.19	-	-	74	-8.81	160	127	H
3	2.4835	57.79	RMS	32.4	.57	-40.45	50.31	54	-3.69	-	-	160	127	H
2	2.483599	77.58	Pk	32.4	0	-40.44	69.54	-	-	74	-4.46	160	127	H
4	2.485521	58.72	RMS	32.5	.57	-40.45	51.34	54	-2.66	-	-	160	127	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

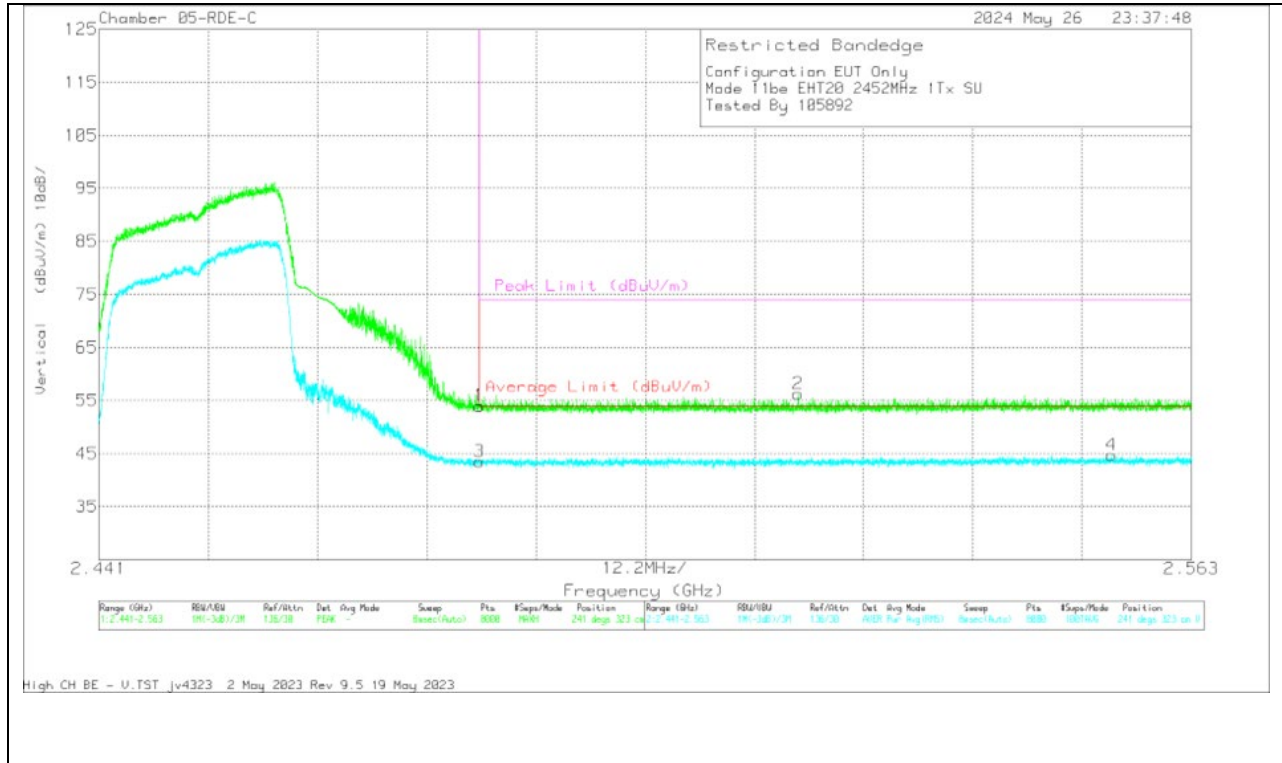


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	62.03	Pk	32.4	0	-40.45	53.98	-	-	74	-20.02	241	323	V
3	2.4835	50.95	RMS	32.4	.57	-40.45	43.47	54	-10.53	-	-	241	323	V
2	2.519075	64.15	Pk	32.5	0	-40.39	56.26	-	-	74	-17.74	241	323	V
4	2.554078	51.75	RMS	32.6	.57	-40.2	44.72	54	-9.28	-	-	241	323	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

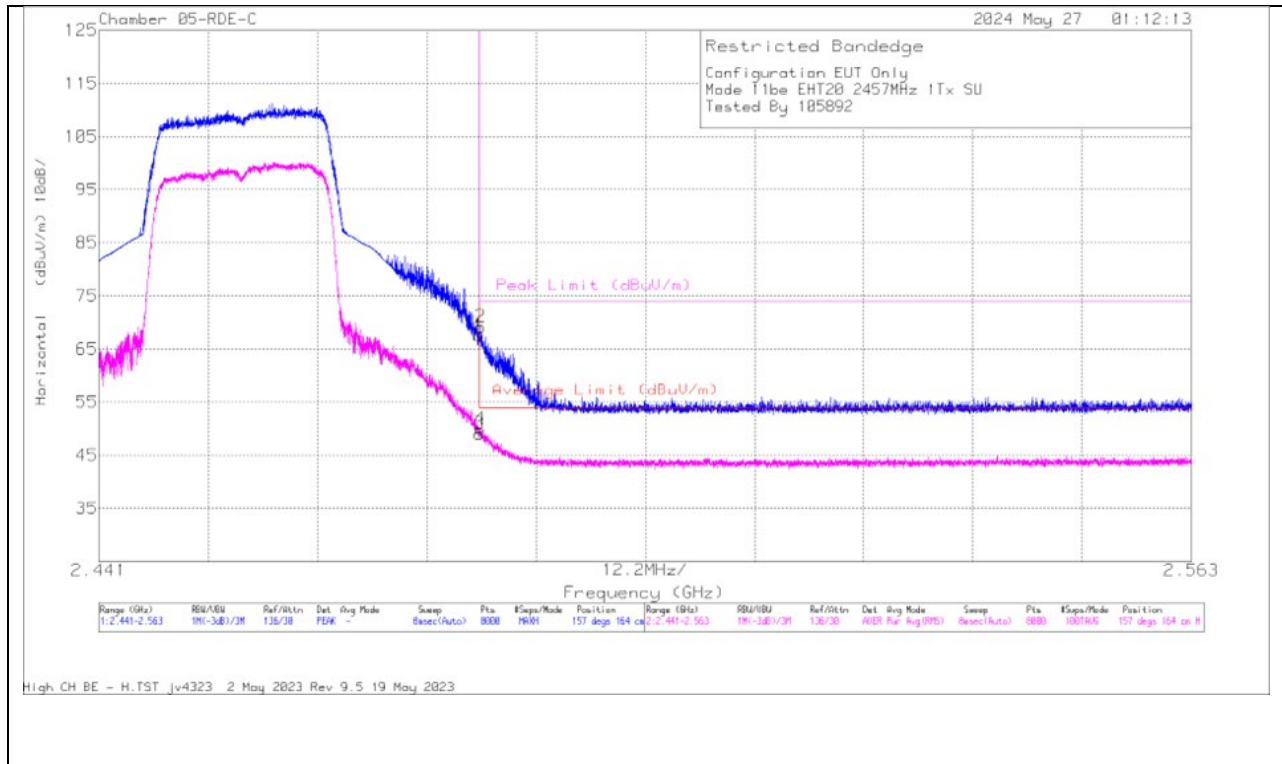

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	75.58	Pk	32.4	0	-40.45	67.53	-	-	74	-6.47	157	164	H
3	2.4835	56.55	RMS	32.4	.57	-40.45	49.07	54	-4.93	-	-	157	164	H
4	2.483568	57.36	RMS	32.4	.57	-40.44	49.89	54	-4.11	-	-	157	164	H
2	2.483645	77.2	Pk	32.4	0	-40.44	69.16	-	-	74	-4.84	157	164	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

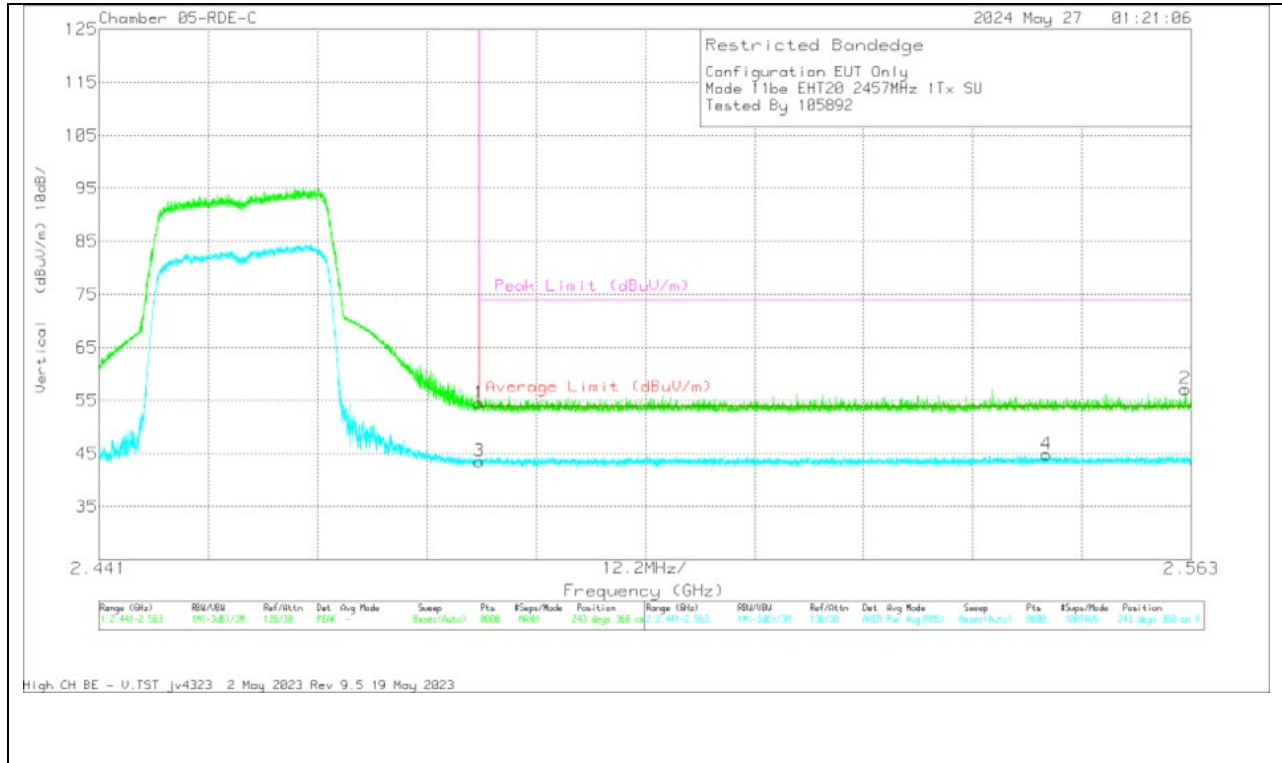


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	62.59	Pk	32.4	0	-40.45	54.54	-	-	74	-19.46	243	360	V
3	2.4835	51.04	RMS	32.4	.57	-40.45	43.56	54	-10.44	-	-	243	360	V
4	2.546788	52	RMS	32.6	.57	-40.3	44.87	54	-9.13	-	-	243	360	V
2	2.562299	64.78	Pk	32.6	0	-40.2	57.18	-	-	74	-16.82	243	360	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

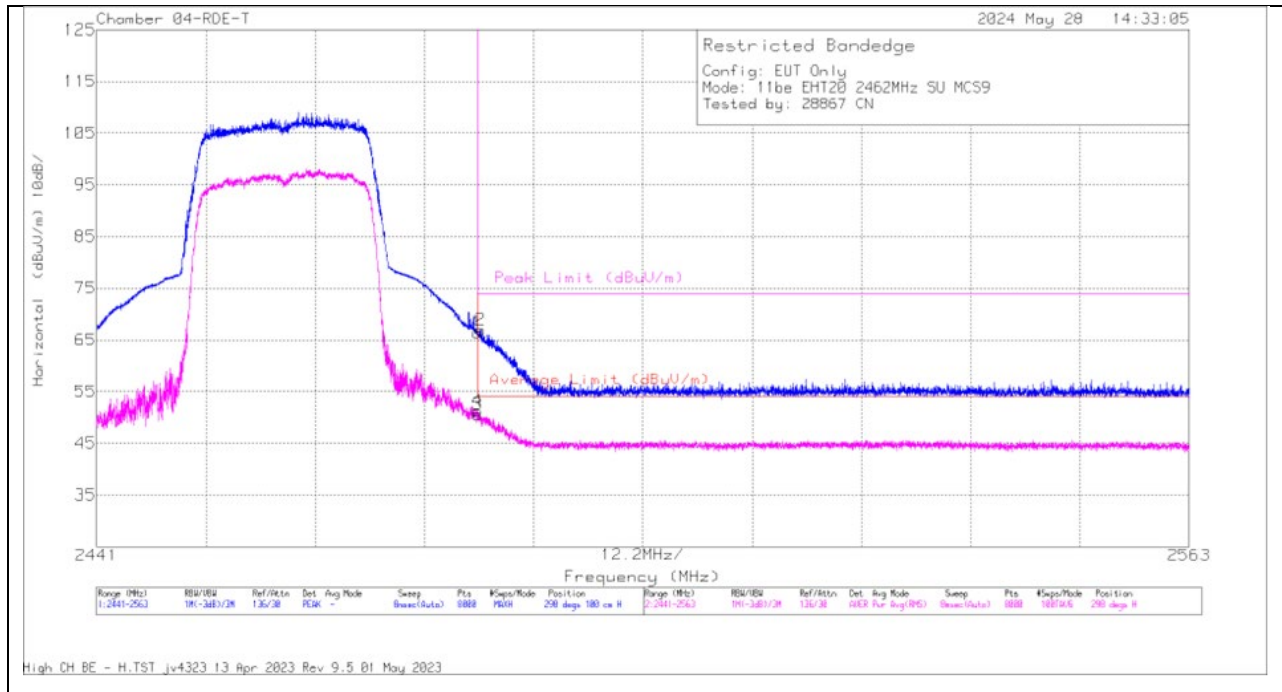

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	71.96	Pk	33.4	0	-38.87	66.49	-	-	74	-7.51	298	100	H
2	* 2483.858	72.4	Pk	33.4	0	-38.89	66.91	-	-	74	-7.09	298	100	H
3	* 2483.5	55.47	RMS	33.4	.57	-38.87	50.57	54	-3.43	-	-	298	100	H
4	* 2483.507	56.13	RMS	33.4	.57	-38.87	51.23	54	-2.77	-	-	298	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

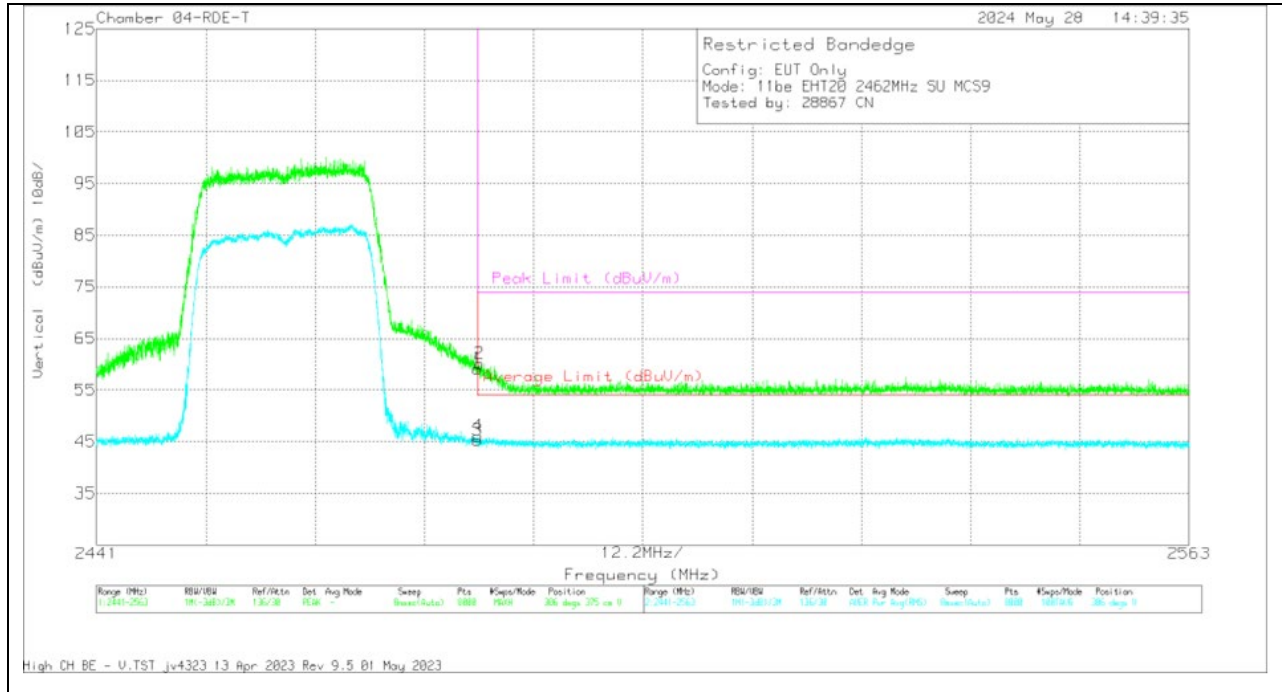


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	64.59	Pk	33.4	0	-38.87	59.12	-	-	74	-14.88	306	375	V
2	* 2483.767	65.71	Pk	33.4	0	-38.89	60.22	-	-	74	-13.78	306	375	V
3	* 2483.5	50.29	RMS	33.4	.57	-38.87	45.39	54	-8.61	-	-	306	375	V
4	* 2483.568	51.01	RMS	33.4	.57	-38.87	46.11	54	-7.89	-	-	306	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

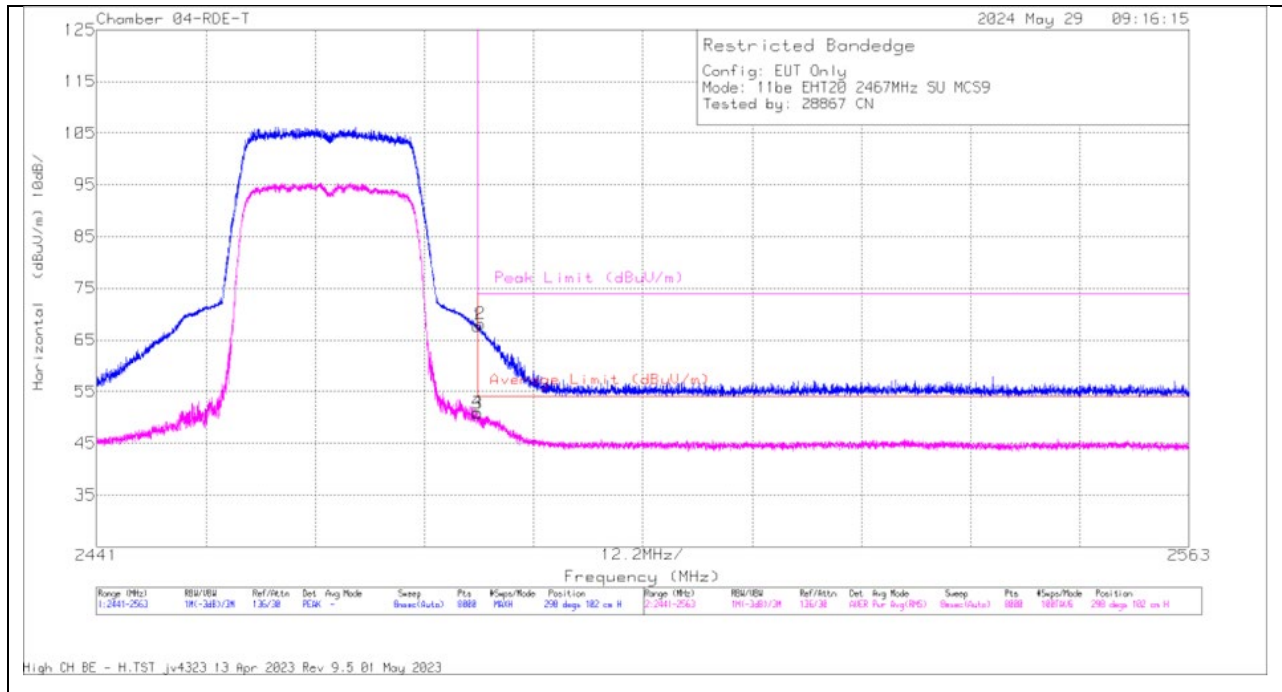

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	73.19	Pk	33.4	0	-38.87	67.72	-	-	74	-6.28	298	102	H
2	* 2483.889	73.53	Pk	33.4	0	-38.89	68.04	-	-	74	-5.96	298	102	H
3	* 2483.5	55.66	RMS	33.4	.57	-38.87	50.76	54	-3.24	-	-	298	102	H
4	* 2483.507	55.86	RMS	33.4	.57	-38.87	50.96	54	-3.04	-	-	298	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

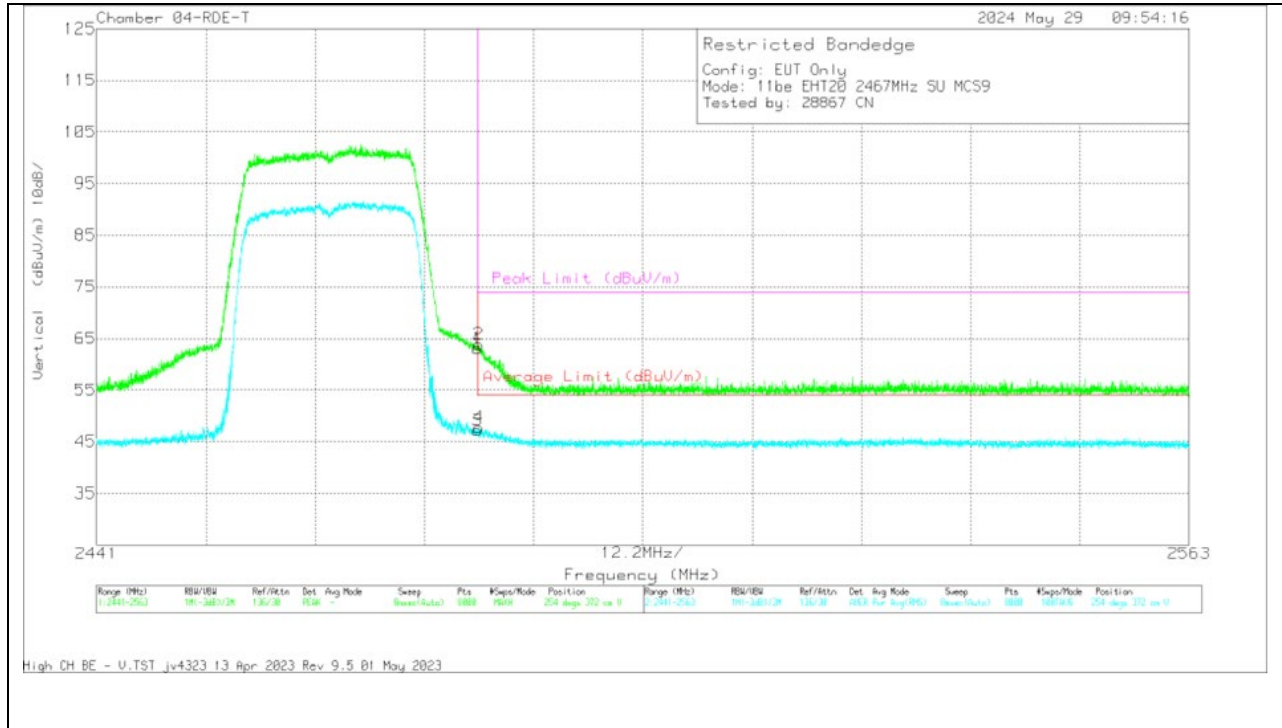


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	68.49	Pk	33.4	0	-38.87	63.02	-	-	74	-10.98	254	372	V
2	* 2483.675	69.25	Pk	33.4	0	-38.88	63.77	-	-	74	-10.23	254	372	V
3	* 2483.5	52.07	RMS	33.4	.57	-38.87	47.17	54	-6.83	-	-	254	372	V
4	* 2483.69	52.61	RMS	33.4	.57	-38.88	47.7	54	-6.3	-	-	254	372	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

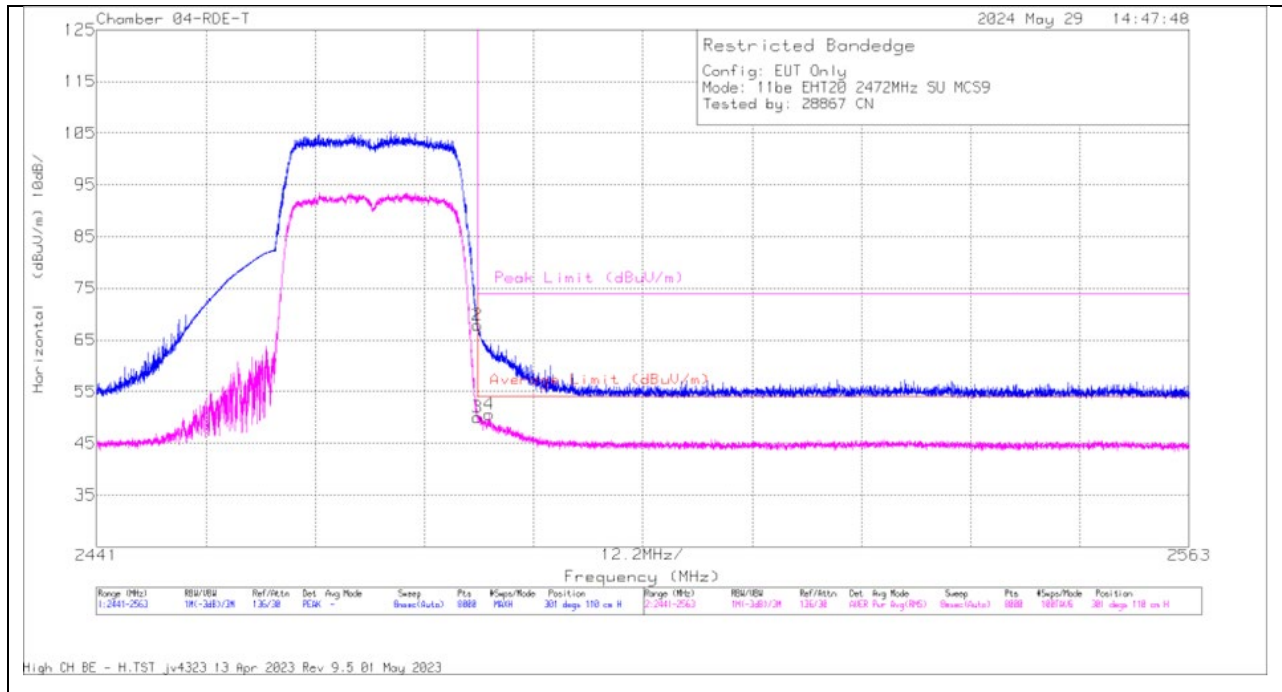

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	73.27	Pk	33.4	0	-38.87	67.8	-	-	74	-6.2	301	110	H
2	* 2483.507	73.3	Pk	33.4	0	-38.87	67.83	-	-	74	-6.17	301	110	H
3	* 2483.5	54.92	RMS	33.4	.57	-38.87	50.02	54	-3.98	-	-	301	110	H
4	* 2484.819	55.41	RMS	33.4	.57	-38.81	50.57	54	-3.43	-	-	301	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

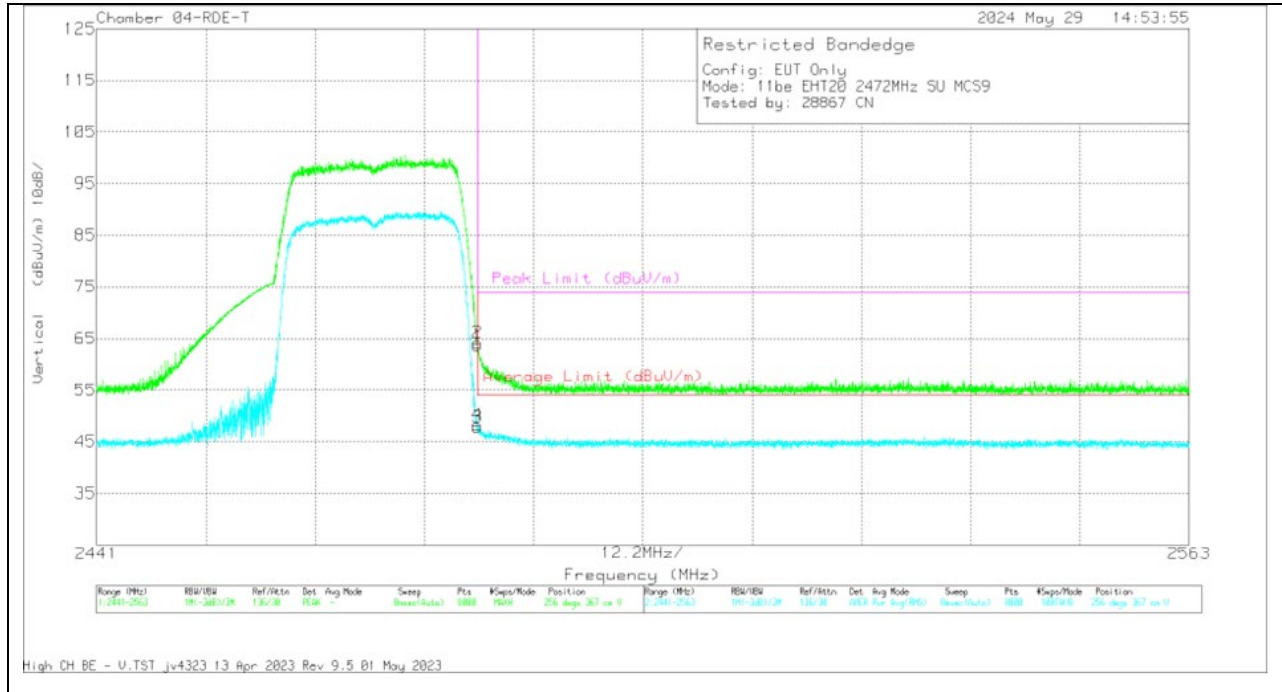

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	69.19	Pk	33.4	0	-38.87	63.72	-	-	74	-10.28	256	367	V
2	* 2483.507	69.64	Pk	33.4	0	-38.87	64.17	-	-	74	-9.83	256	367	V
3	* 2483.5	52.78	RMS	33.4	.57	-38.87	47.88	54	-6.12	-	-	256	367	V
4	* 2483.538	53.17	RMS	33.4	.57	-38.87	48.27	54	-5.73	-	-	256	367	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.9. 802.11be EHT20 OFDMA MODE IN THE 2.4 GHZ BAND

2TX ANT 4 + ANT 3 OFDMA MODE: 26-Tones

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

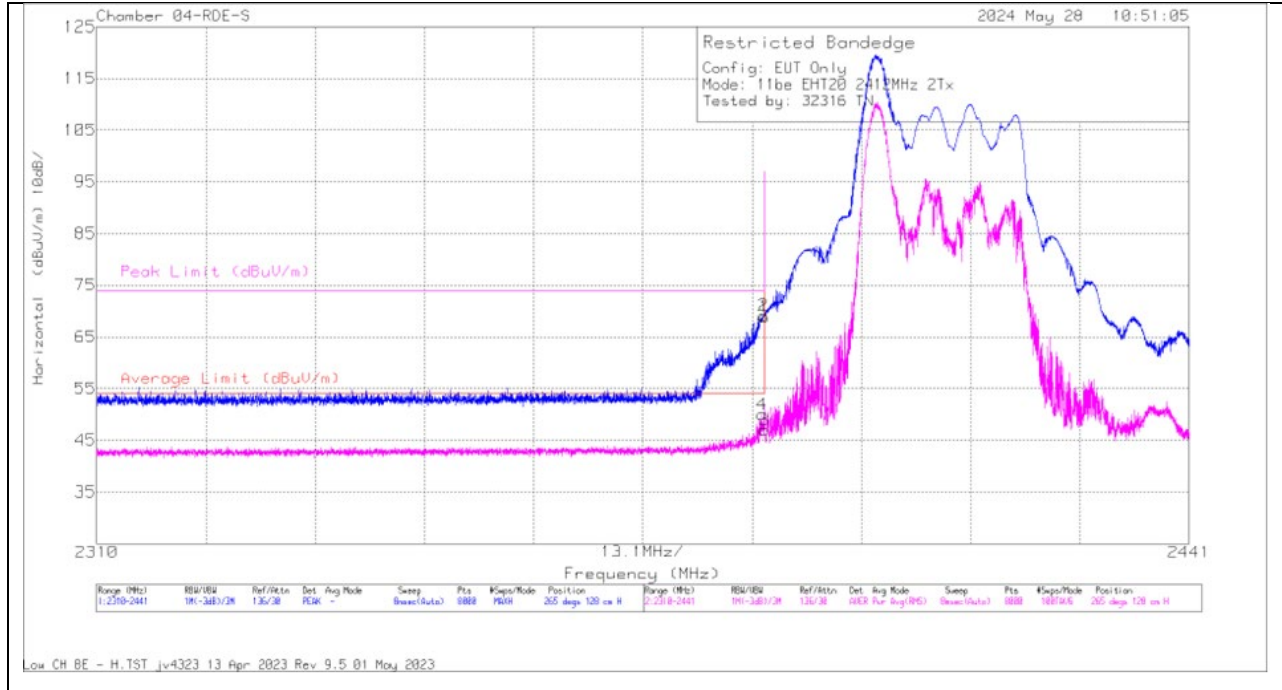

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20078 4 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
4	2389.822	57	RMS	32.3	.59	-39.95	49.94	54	-4.06	-	-	265	128	H
2	2389.936	76.69	Pk	32.3	0	-39.95	69.04	-	-	74	-4.96	265	128	H
1	2390	76.47	Pk	32.3	0	-39.95	68.82	-	-	74	-5.18	265	128	H
3	2390	54.1	RMS	32.3	.59	-39.95	47.04	54	-6.96	-	-	265	128	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

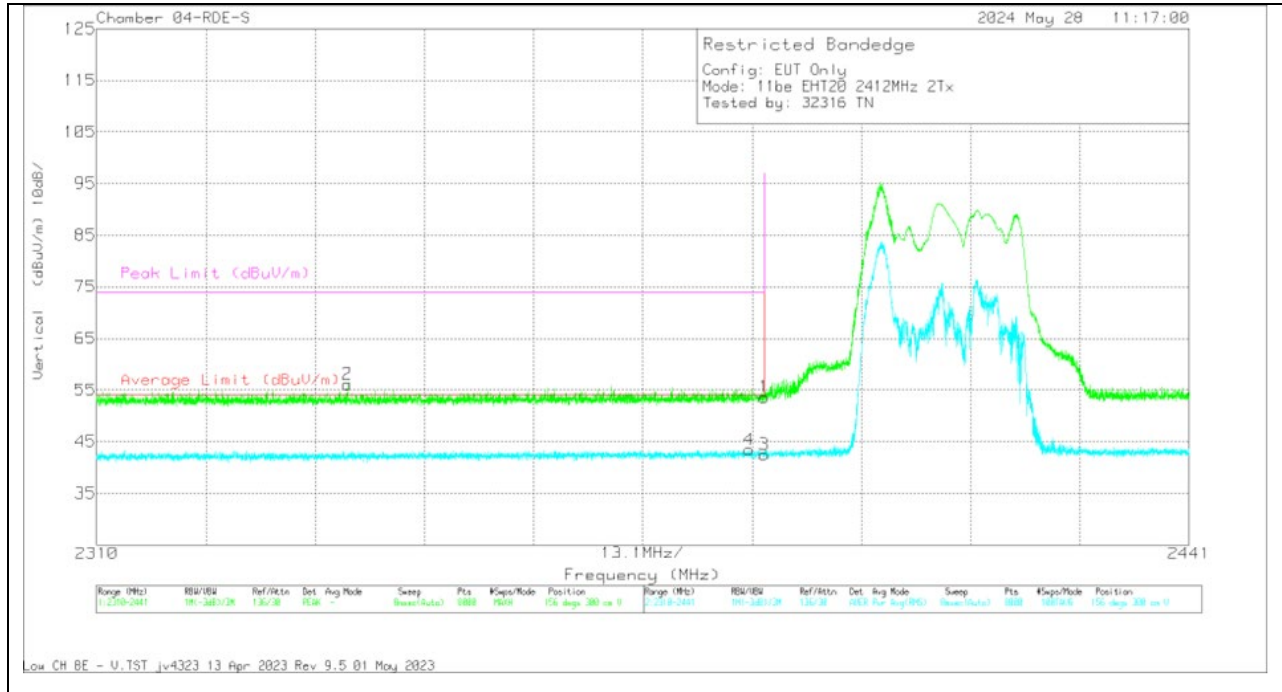


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2340.052	64.15	Pk	32.1	0	-40.07	56.18	-	-	74	-17.82	156	300	V
4	2388.249	51.05	RMS	32.3	.59	-39.95	43.99	54	-10.01	-	-	156	300	V
1	2390	61.29	Pk	32.3	0	-39.95	53.64	-	-	74	-20.36	156	300	V
3	2390	50.15	RMS	32.3	.59	-39.95	43.09	54	-10.91	-	-	156	300	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

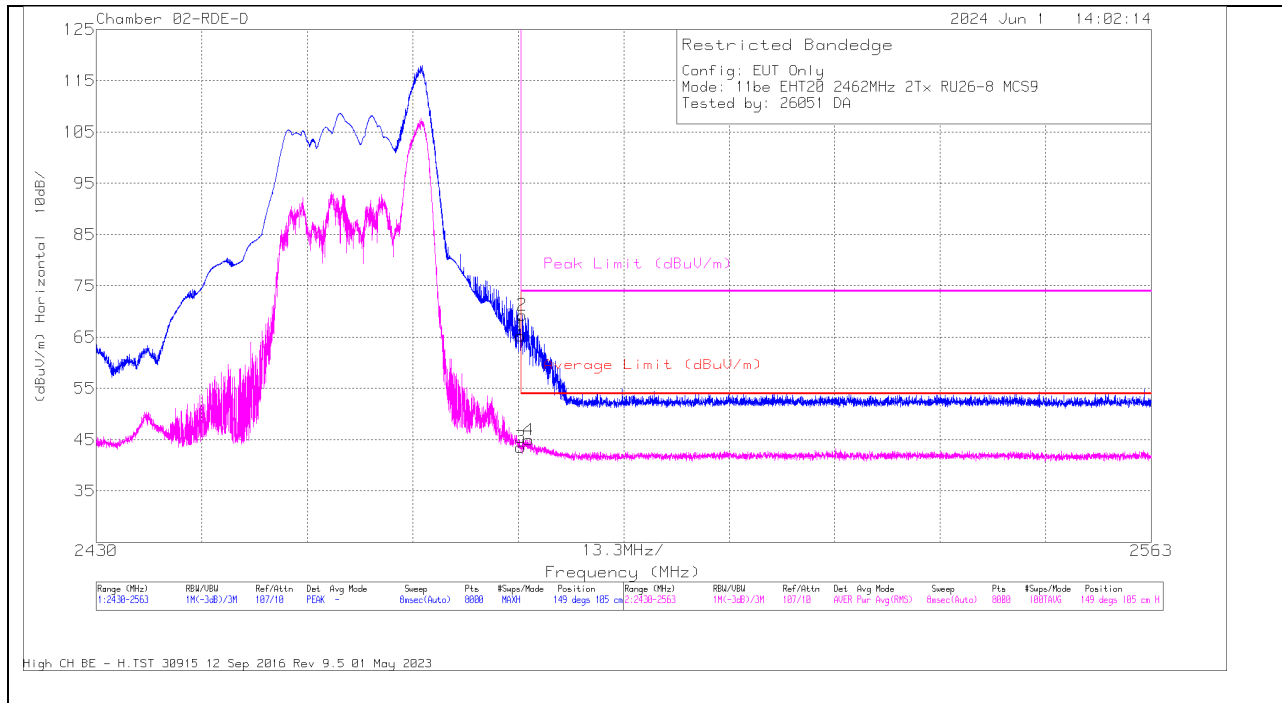

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF(dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.45	Pk	32.4	-19.6	0	65.25	-	-	74	-8.75	149	105	H
2	* 2483.672	56.5	Pk	32.4	-19.6	0	69.3	-	-	74	-4.7	149	105	H
3	* 2483.5	30.16	RMS	32.4	-19.6	.59	43.55	54	-10.45	-	-	149	105	H
4	* 2484.537	31.48	RMS	32.4	-19.5	.59	44.97	54	-9.03	-	-	149	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector

VERTICAL RESULT

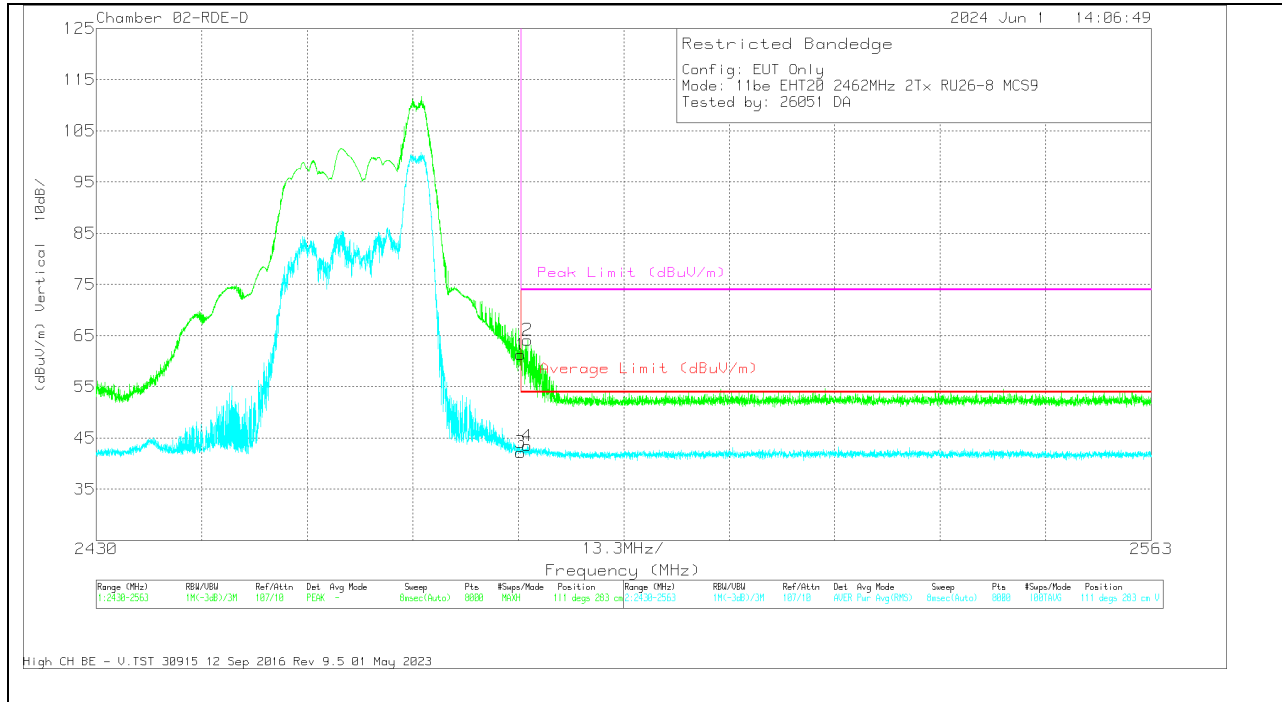


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF(dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	48.47	Pk	32.4	-19.6	0	61.27	-	-	74	-12.73	111	283	V
2	* 2484.37	51.34	Pk	32.4	-19.6	0	64.14	-	-	74	-9.86	111	283	V
3	* 2483.5	28.8	RMS	32.4	-19.6	.59	42.19	54	-11.81	-	-	111	283	V
4	* 2484.354	30.09	RMS	32.4	-19.6	.59	43.48	54	-10.52	-	-	111	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

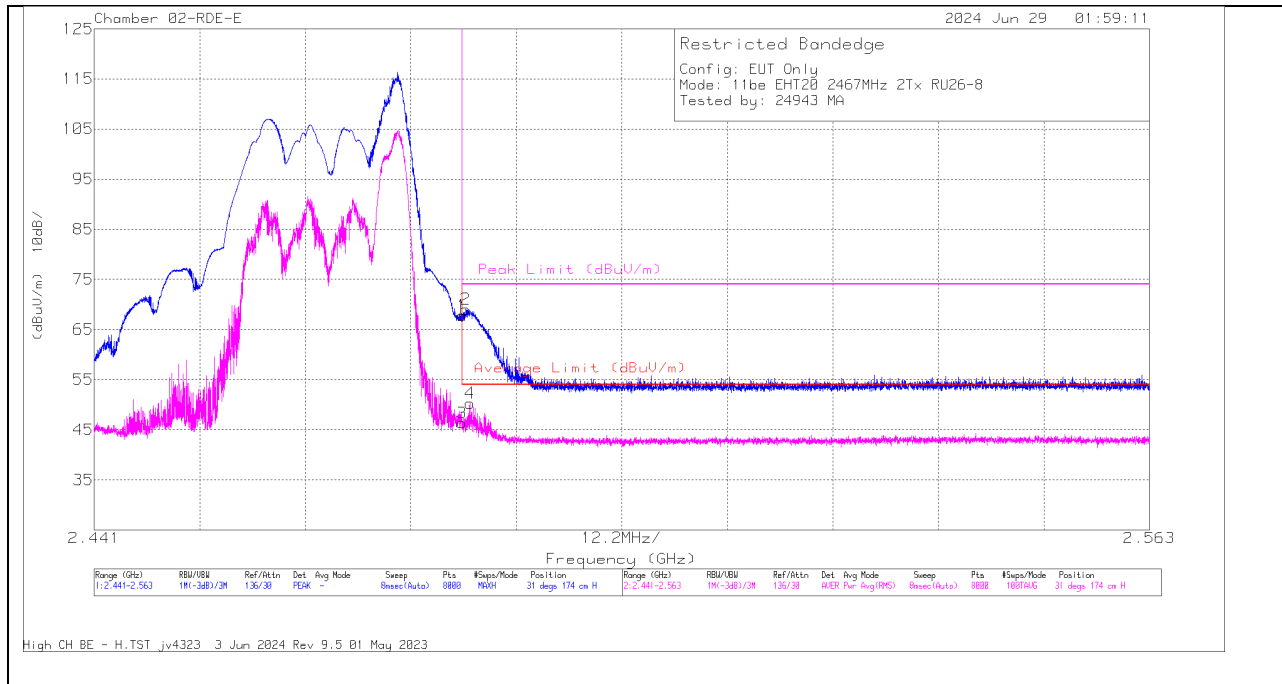

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.69	Pk	32.3	0	-39.16	67.83	-	-	74	-6.17	31	174	H
2	* 2.483965	75.92	Pk	32.3	0	-39.15	69.07	-	-	74	-4.93	31	174	H
3	* 2.4835	52.61	RMS	32.3	.59	-39.16	46.34	54	-7.66	-	-	31	174	H
4	* 2.484453	56.58	RMS	32.3	.59	-39.14	50.33	54	-3.67	-	-	31	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

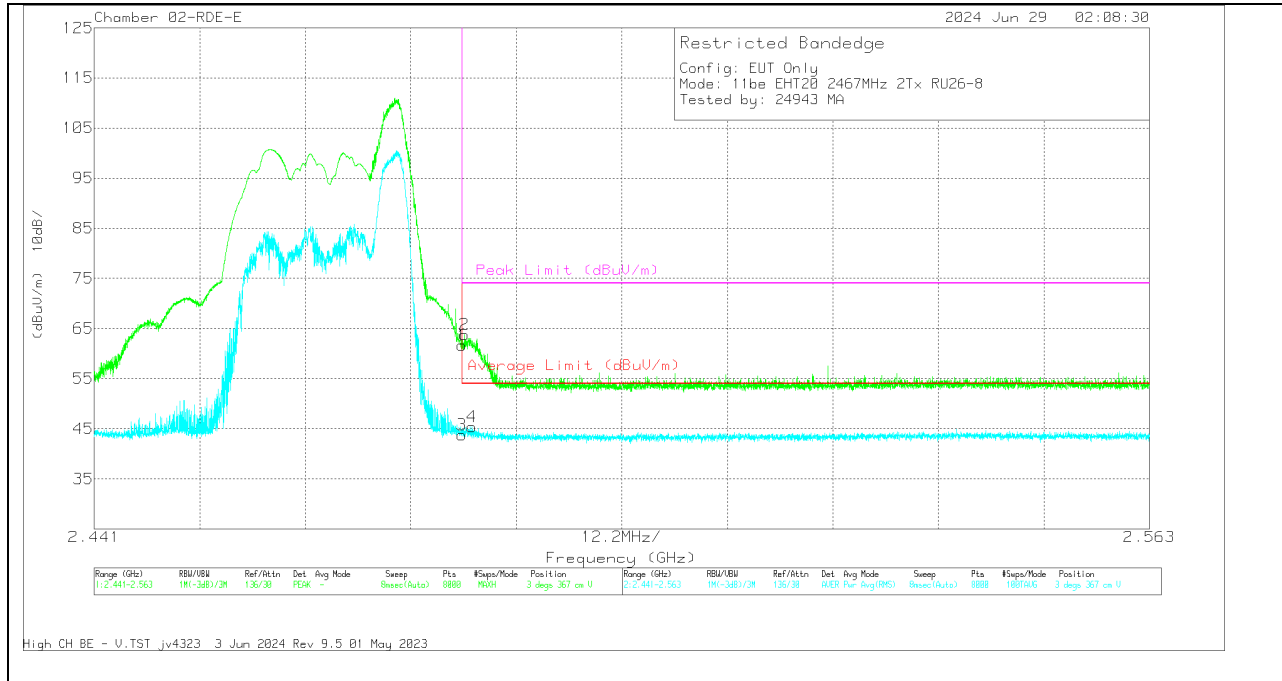


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	68.48	Pk	32.3	0	-39.16	61.62	-	-	74	-12.38	3	367	V
2	* 2.483828	70.66	Pk	32.3	0	-39.15	63.81	-	-	74	-10.19	3	367	V
3	* 2.4835	50.04	RMS	32.3	.59	-39.16	43.77	54	-10.23	-	-	3	367	V
4	* 2.484697	51.7	RMS	32.3	.59	-39.14	45.45	54	-8.55	-	-	3	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

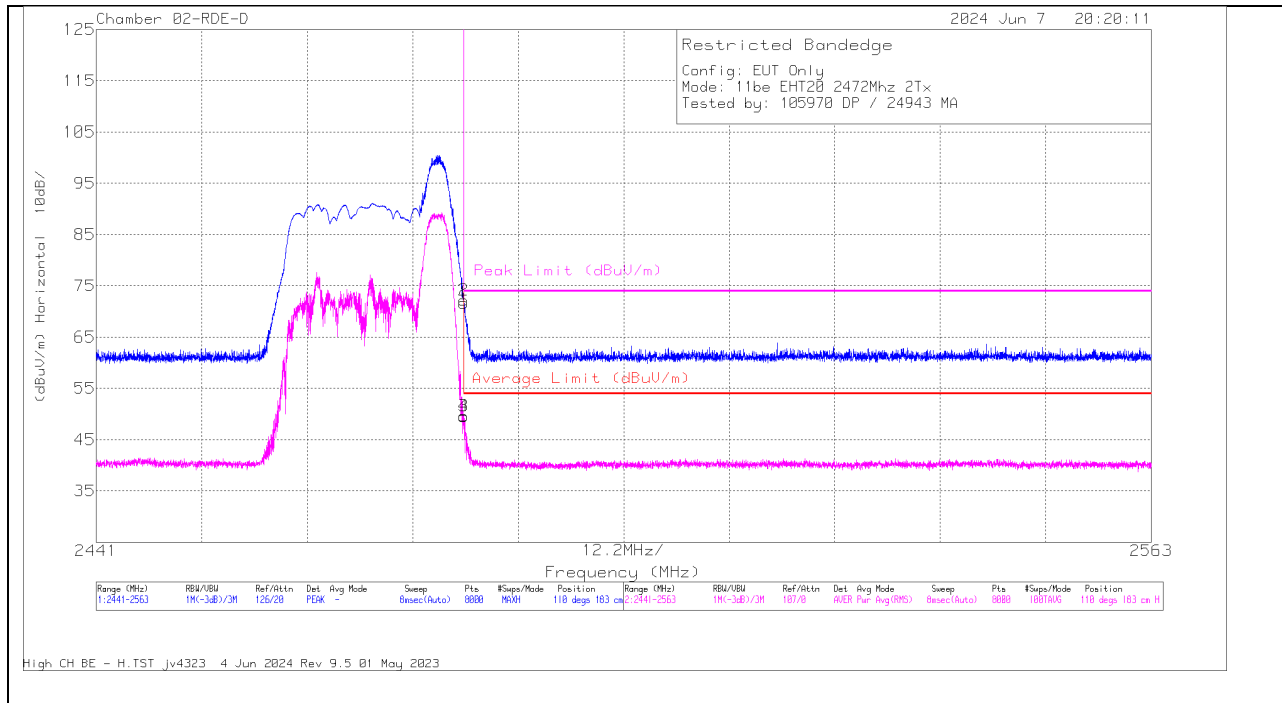

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	58.88	Pk	32.4	-19.6	0	71.68	-	-	74	-2.32	110	183	H
2	* 2483.507	59.39	Pk	32.4	-19.6	0	72.19	-	-	74	-1.81	110	183	H
3	* 2483.5	36.18	RMS	32.4	-19.6	.59	49.57	54	-4.43	-	-	110	183	H
4	* 2483.507	36.22	RMS	32.4	-19.6	.59	49.61	54	-4.39	-	-	110	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT




Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	56.08	Pk	32.4	-19.6	0	68.88	-	-	74	-5.12	70	326	V
2	* 2483.523	56.57	Pk	32.4	-19.6	0	69.37	-	-	74	-4.63	70	326	V
3	* 2483.5	38.89	RMS	32.4	-19.6	.59	52.28	54	-1.72	-	-	70	326	V
4	* 2483.523	39.24	RMS	32.4	-19.6	.59	52.63	54	-1.37	-	-	70	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX ANT 4 + ANT 3 OFDMA MODE: SU Mode

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

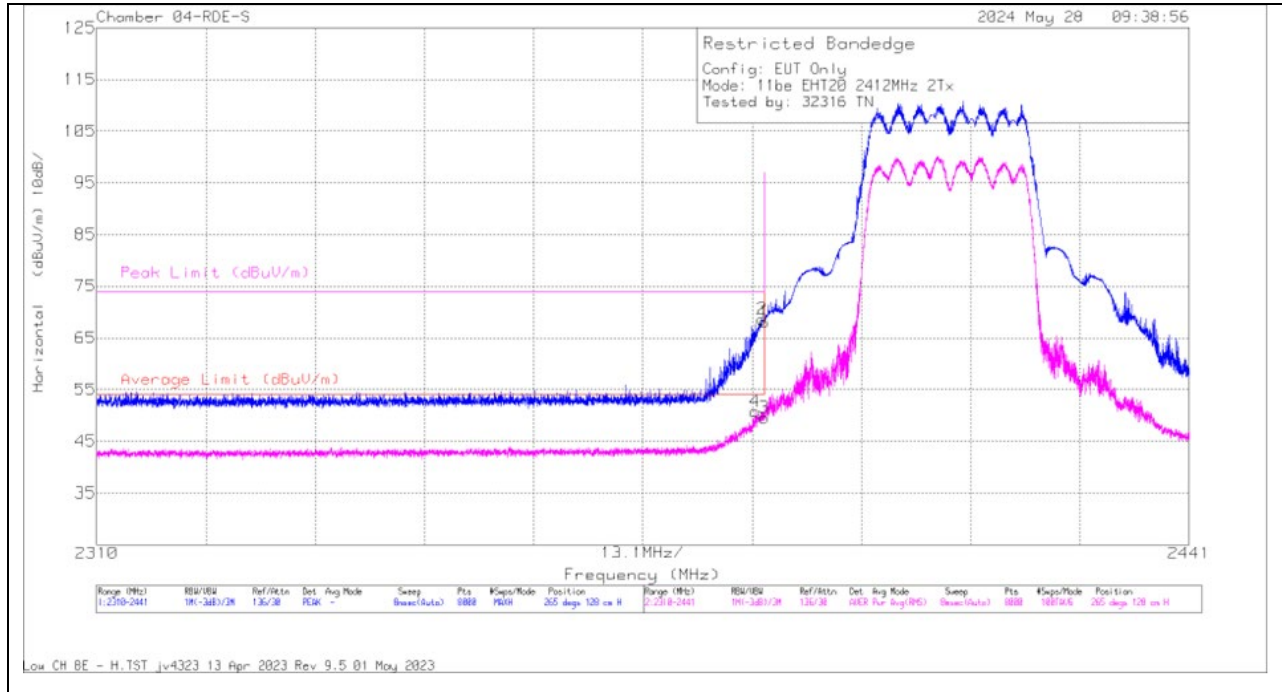

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20078 4 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2388.97	57.8	RMS	32.3	.57	-39.95	50.72	54	-3.28	-	-	265	128	H
2	2389.822	76.22	PK	32.3	0	-39.95	68.57	-	-	74	-5.43	265	128	H
1	2390	75.73	PK	32.3	0	-39.95	68.08	-	-	74	-5.92	265	128	H
3	2390	56.74	RMS	32.3	.57	-39.95	49.66	54	-4.34	-	-	265	128	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

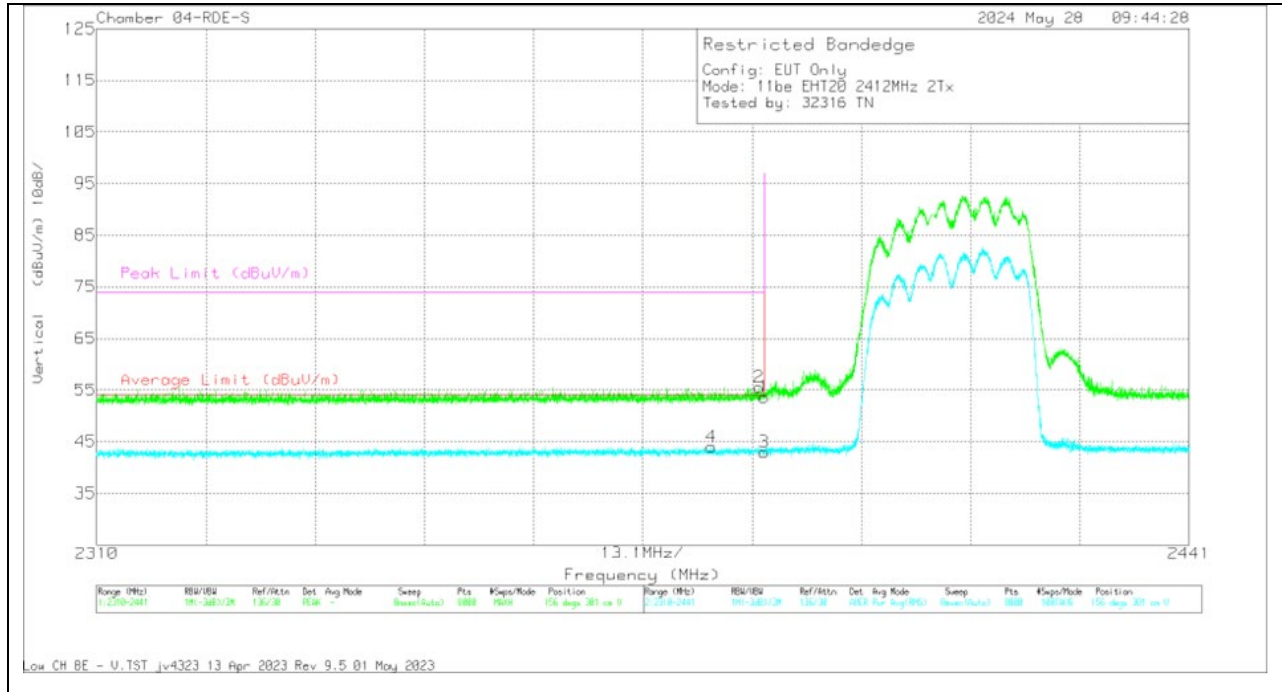


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20078 4 ACF 3m (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2383.762	51.23	RMS	32.2	.57	-39.98	44.02	54	-9.98	-	-	156	301	V
2	2389.379	63.22	Pk	32.3	0	-39.95	55.57	-	-	74	-18.43	156	301	V
1	2390	61.25	Pk	32.3	0	-39.95	53.6	-	-	74	-20.4	156	301	V
3	2390	49.98	RMS	32.3	.57	-39.95	42.9	54	-11.1	-	-	156	301	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

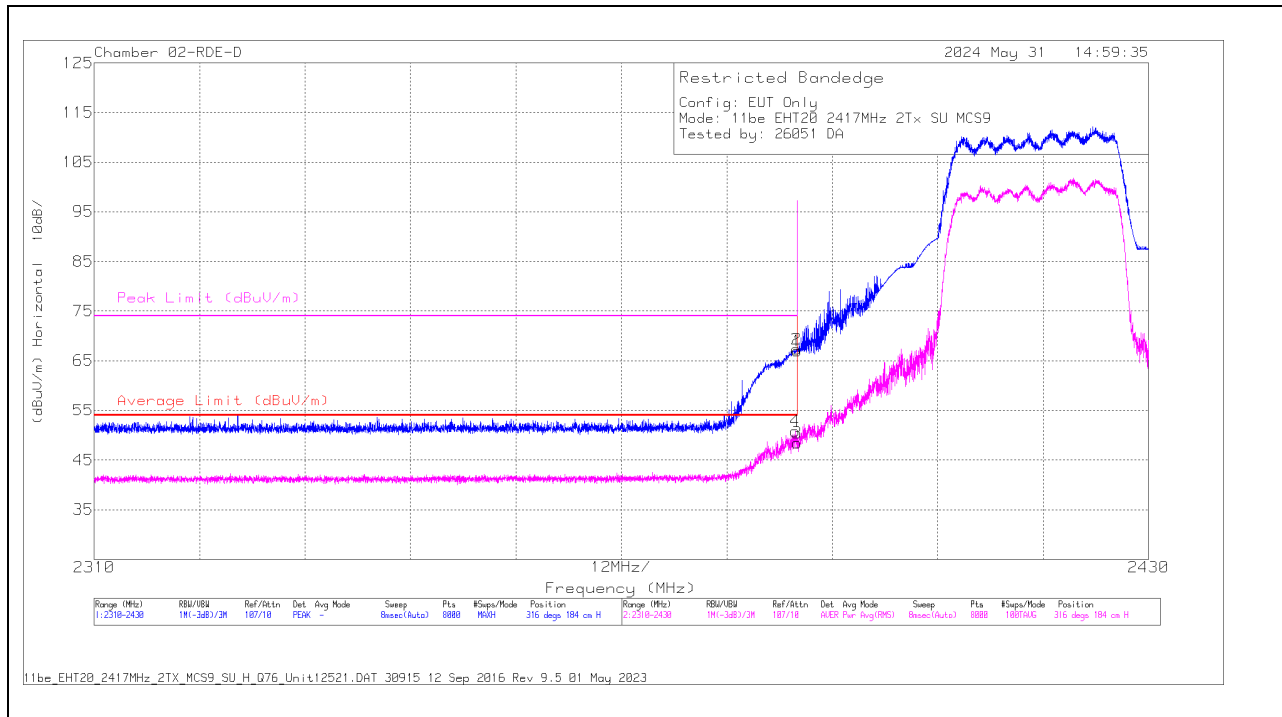

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	54.4	Pk	32.2	-19.6	0	67	-	-	74	-7	316	184	H
2	* 2389.961	54.71	Pk	32.2	-19.6	0	67.31	-	-	74	-6.69	316	184	H
3	* 2390	35.22	RMS	32.2	-19.6	.57	48.39	54	-5.61	-	-	316	184	H
4	* 2389.826	37.63	RMS	32.2	-19.6	.57	50.8	54	-3.2	-	-	316	184	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

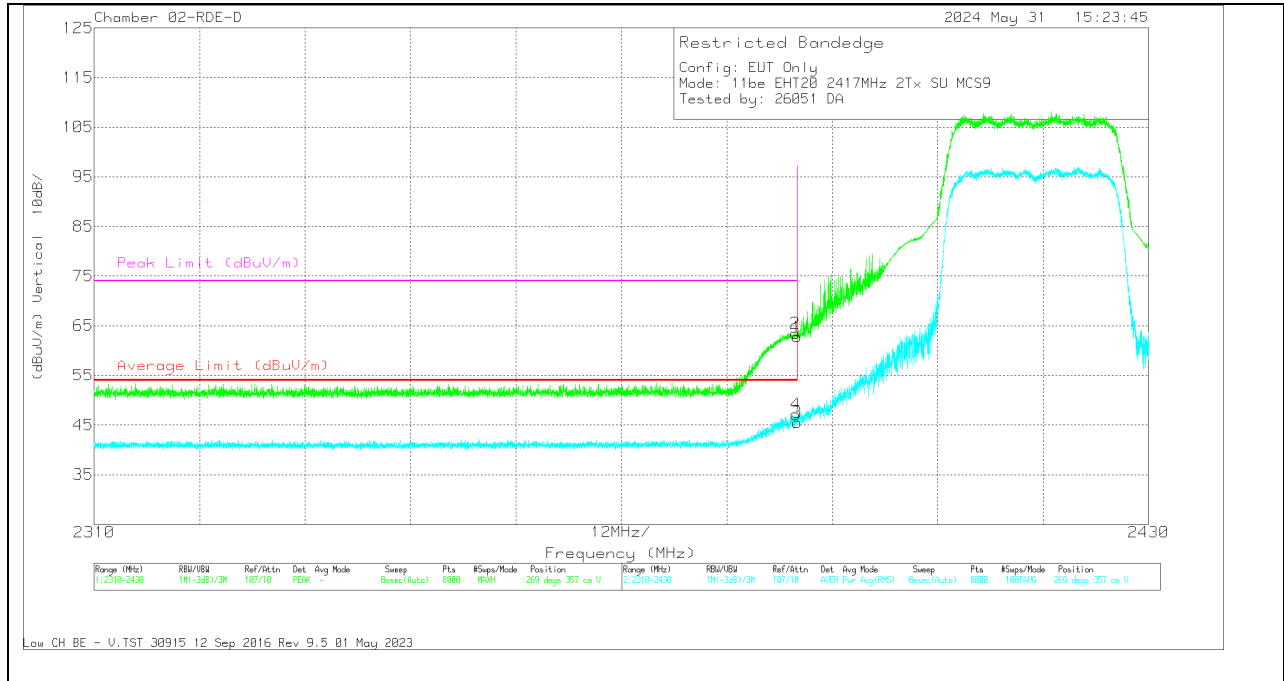


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/C bl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	50.16	Pk	32.2	-19.6	0	62.76	-	-	74	-11.24	269	357	V
2	* 2389.796	50.9	Pk	32.2	-19.6	0	63.5	-	-	74	-10.5	269	357	V
3	* 2390	32.63	RMS	32.2	-19.6	.57	45.80	54	-8.20	-	-	269	357	V
4	* 2389.841	34.27	RMS	32.2	-19.6	.57	47.44	54	-6.56	-	-	269	357	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

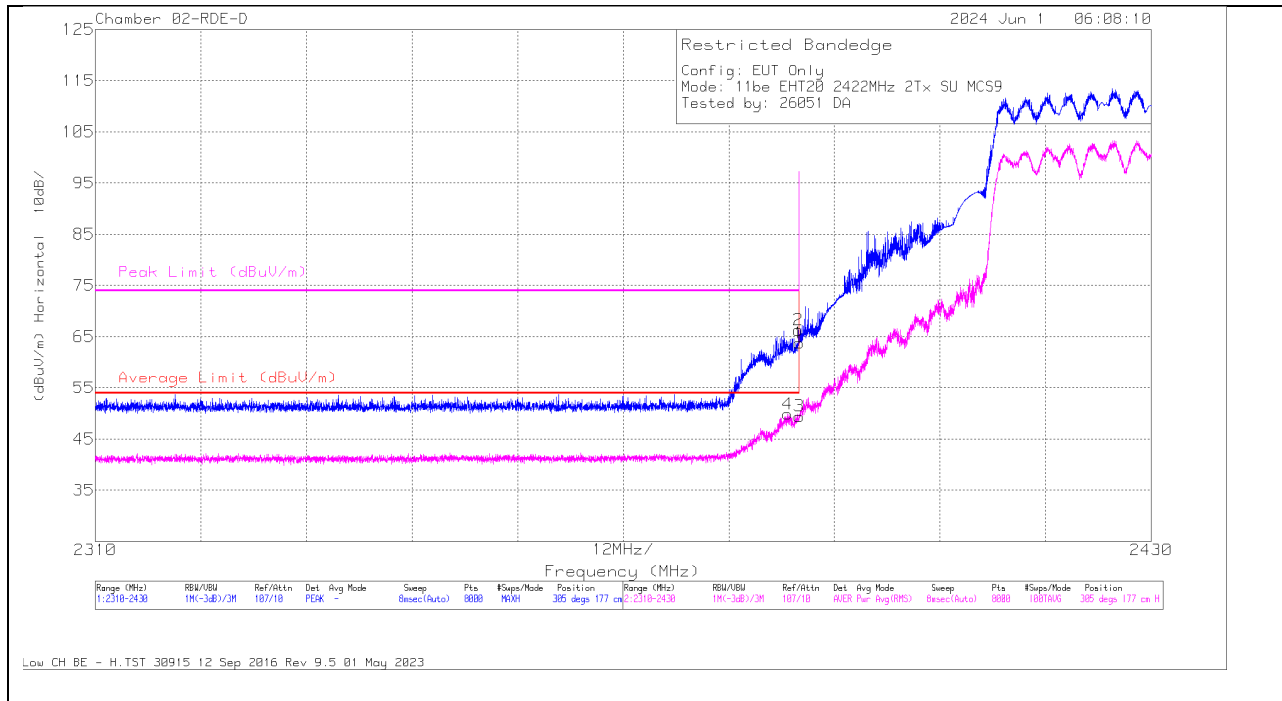

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbi (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	51.14	Pk	32.2	-19.6	0	63.74	-	-	74	-10.26	305	177	H
2	* 2389.886	53.68	Pk	32.2	-19.6	0	66.28	-	-	74	-7.72	305	177	H
3	* 2390	36.28	RMS	32.2	-19.6	.57	49.45	54	-4.55	-	-	305	177	H
4	* 2388.655	36.79	RMS	32.2	-19.7	.57	49.86	54	-4.14	-	-	305	177	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

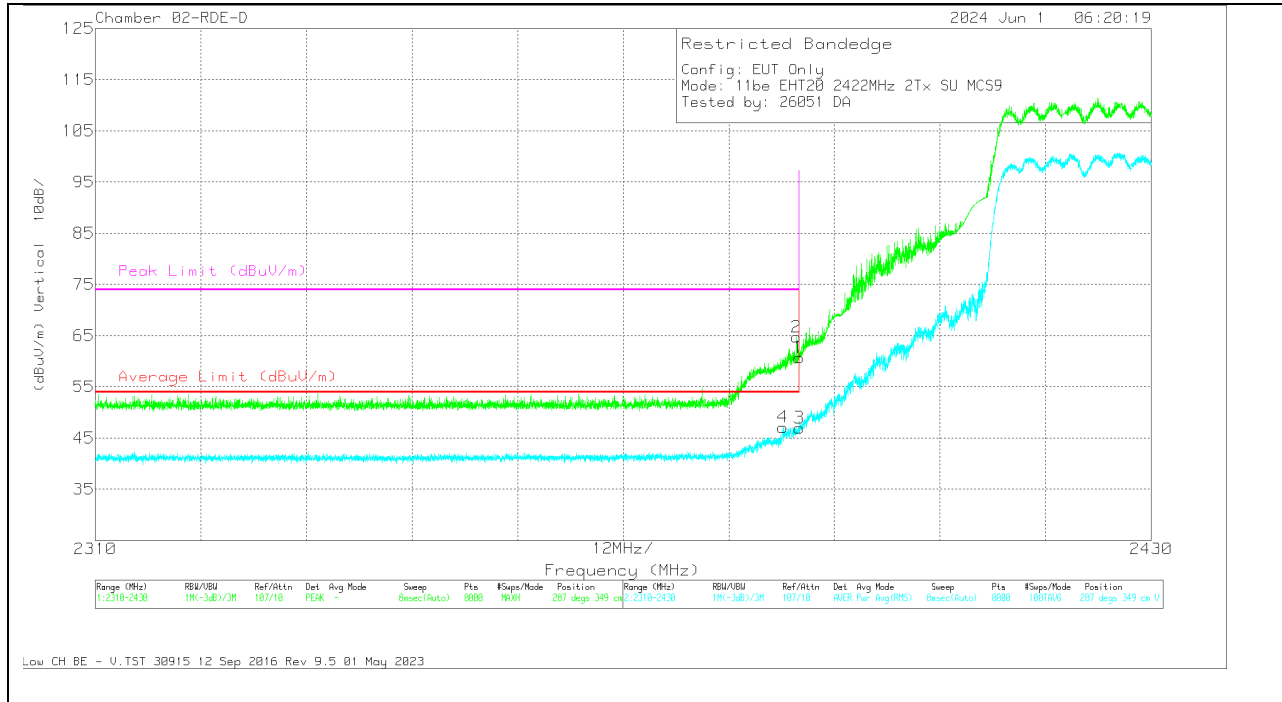


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	48.1	Pk	32.2	-19.6	0	60.7	-	-	74	-13.3	287	349	V
2	* 2389.706	52.11	Pk	32.2	-19.6	0	64.71	-	-	74	-9.29	287	349	V
3	* 2390	33.8	RMS	32.2	-19.6	.57	46.97	54	-7.03	-	-	287	349	V
4	* 2388.145	34.04	RMS	32.2	-19.7	.57	47.11	54	-6.89	-	-	287	349	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

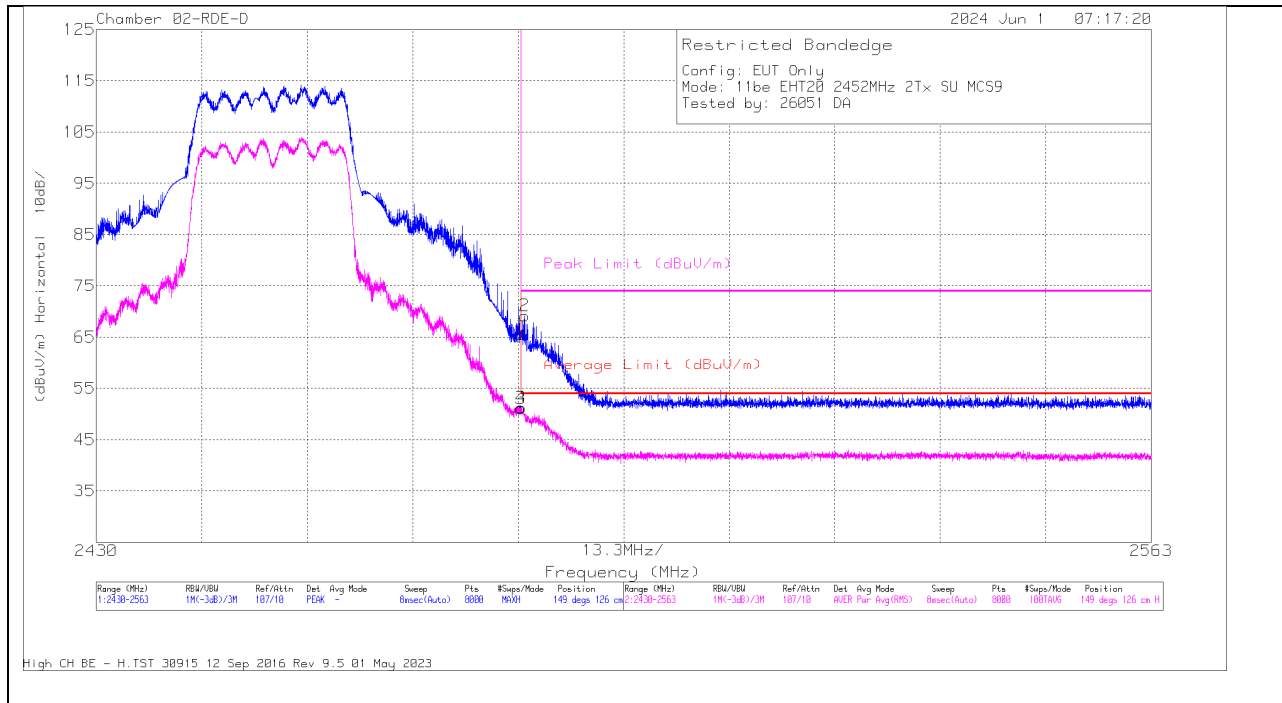

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/C bl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.72	Pk	32.4	-19.6	0	65.52	-	-	74	-8.48	149	126	H
2	* 2484.021	56.39	Pk	32.4	-19.6	0	69.19	-	-	74	-4.81	149	126	H
3	* 2483.5	37.75	RMS	32.4	-19.6	.57	51.12	54	-2.88	-	-	149	126	H
4	* 2483.572	37.87	RMS	32.4	-19.6	.57	51.24	54	-2.76	-	-	149	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

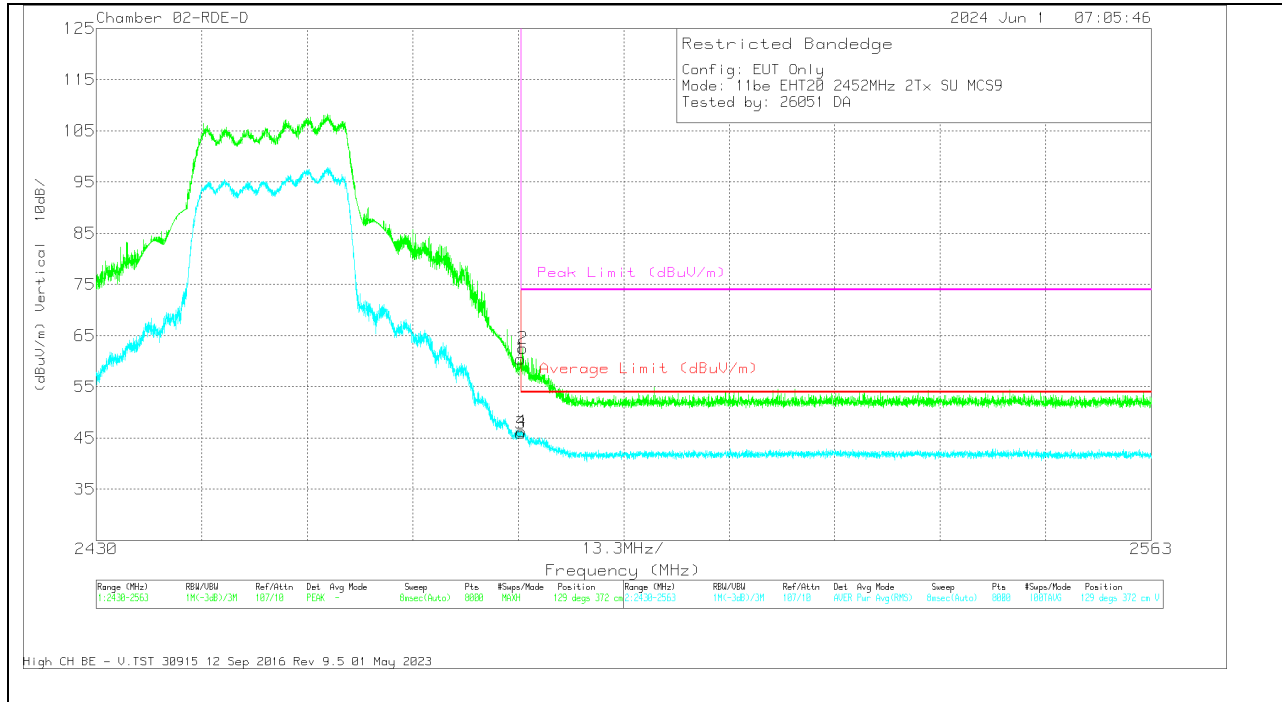


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	47.66	Pk	32.4	-19.6	0	60.46	-	-	74	-13.54	129	372	V
2	* 2483.788	49.74	Pk	32.4	-19.6	0	62.54	-	-	74	-11.46	129	372	V
3	* 2483.5	32.55	RMS	32.4	-19.6	.57	45.92	54	-8.08	-	-	129	372	V
4	* 2483.639	32.94	RMS	32.4	-19.6	.57	46.31	54	-7.69	-	-	129	372	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

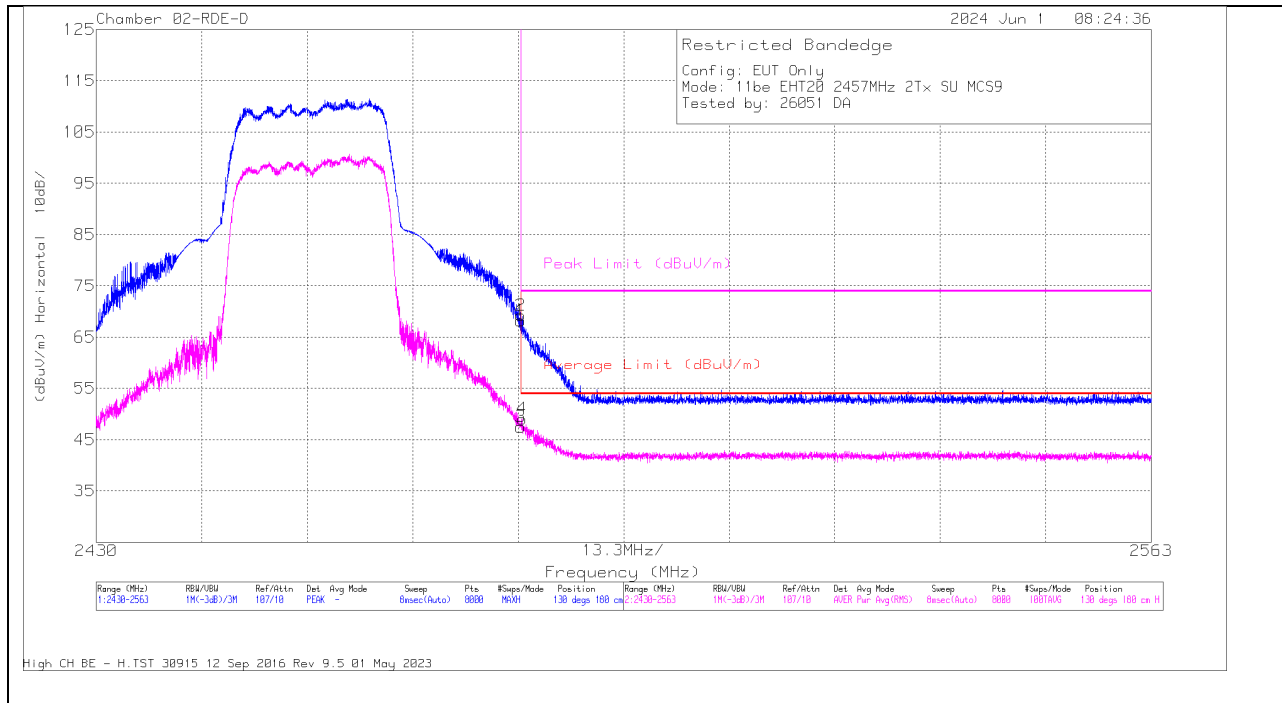

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.45	Pk	32.4	-19.6	0	68.25	-	-	74	-5.75	130	180	H
2	* 2483.506	56.45	Pk	32.4	-19.6	0	69.25	-	-	74	-4.75	130	180	H
3	* 2483.5	34.13	RMS	32.4	-19.6	.57	47.5	54	-6.5	-	-	130	180	H
4	* 2483.689	35.7	RMS	32.4	-19.6	.57	49.07	54	-4.93	-	-	130	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

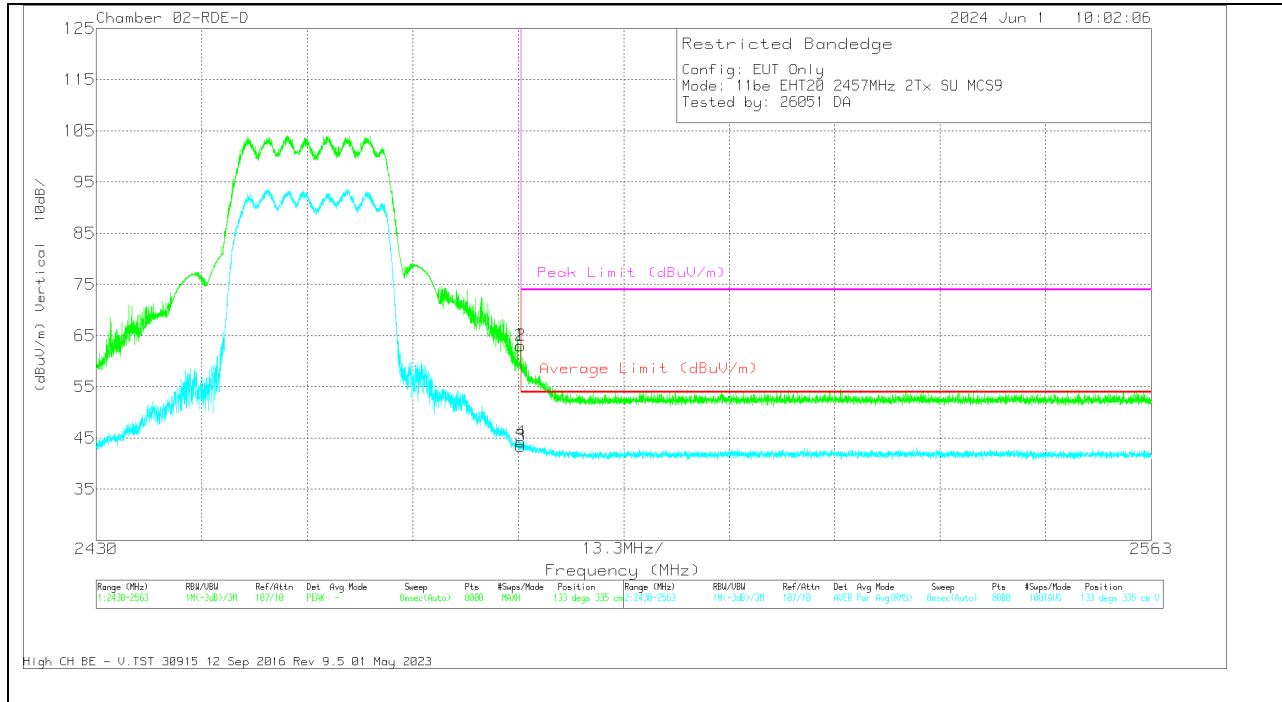


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	50.25	Pk	32.4	-19.6	0	63.05	-	-	74	-10.95	133	335	V
2	* 2483.506	50.27	Pk	32.4	-19.6	0	63.07	-	-	74	-10.93	133	335	V
3	* 2483.5	30.09	RMS	32.4	-19.6	.57	43.46	54	-10.54	-	-	133	335	V
4	* 2483.539	30.84	RMS	32.4	-19.6	.57	44.21	54	-9.79	-	-	133	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

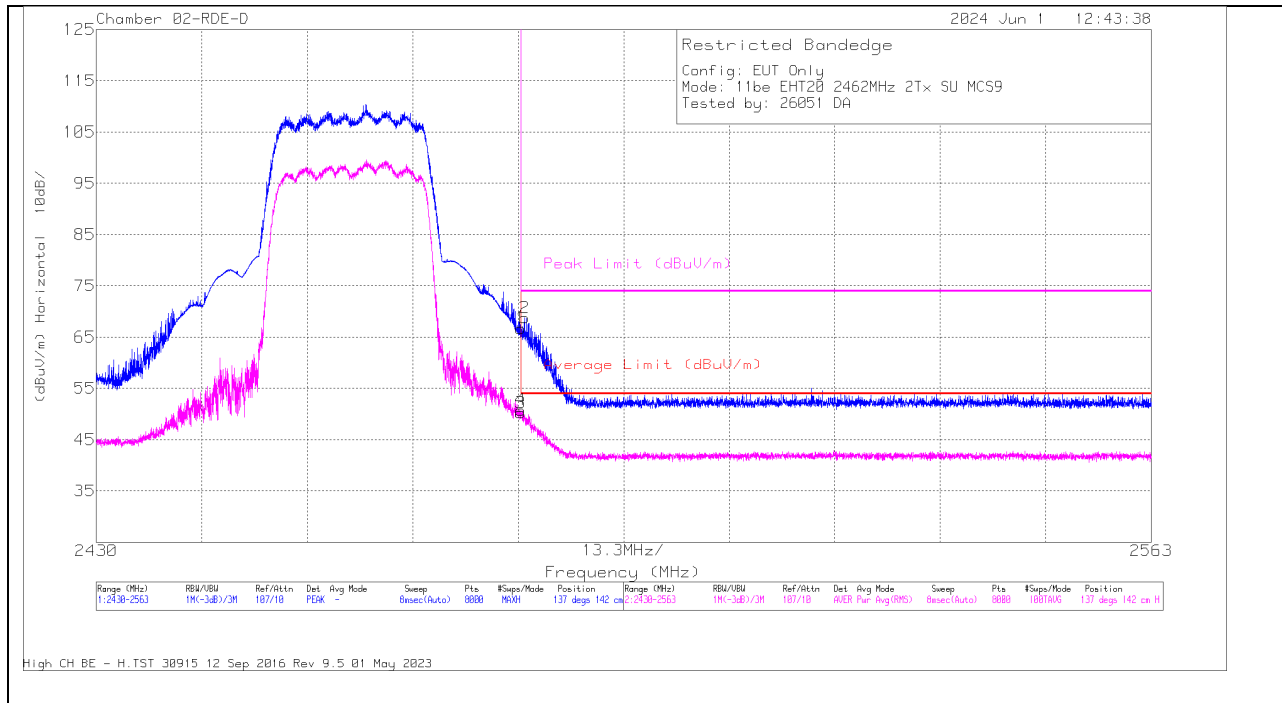

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/C bl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	53.91	Pk	32.4	-19.6	0	66.71	-	-	74	-7.29	137	142	H
2	* 2484.005	55.98	Pk	32.4	-19.6	0	68.78	-	-	74	-5.22	137	142	H
3	* 2483.5	36.86	RMS	32.4	-19.6	.57	50.23	54	-3.77	-	-	137	142	H
4	* 2483.506	37.42	RMS	32.4	-19.6	.57	50.79	54	-3.21	-	-	137	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

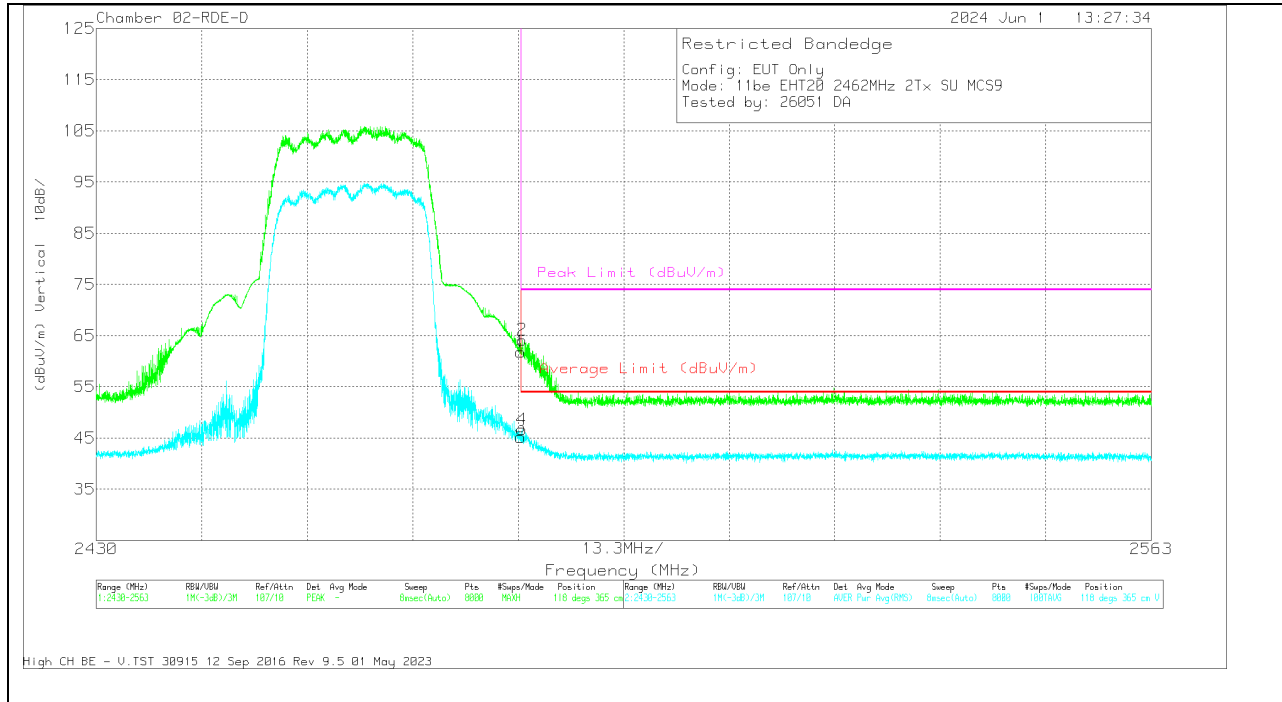


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.03	Pk	32.4	-19.6	0	61.83	-	-	74	-12.17	118	365	V
2	* 2483.672	51.35	Pk	32.4	-19.6	0	64.15	-	-	74	-9.85	118	365	V
3	* 2483.5	31.8	RMS	32.4	-19.6	.57	45.17	54	-8.83	-	-	118	365	V
4	* 2483.655	33.32	RMS	32.4	-19.6	.57	46.69	54	-7.31	-	-	118	365	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

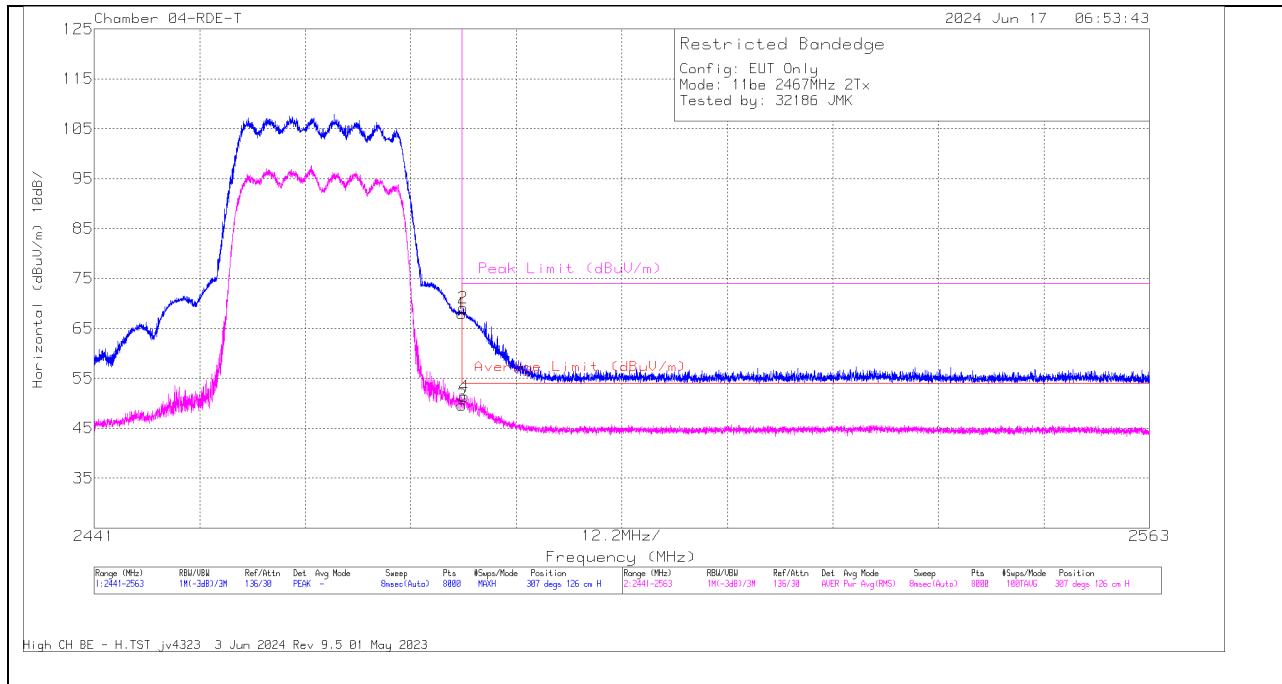

Marker	Frequency (MHz)	Meter Reading (dBμV)	Det	80430 3m ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Peak Limit (dBμV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	73.47	Pk	33.4	0	-38.87	68	-	-	74	-6	307	126	H
2	* 2483.66	74.6	Pk	33.4	0	-38.88	69.12	-	-	74	-4.88	307	126	H
3	* 2483.5	54.49	RMS	33.4	.57	-38.87	49.59	54	-4.41	-	-	307	126	H
4	* 2483.782	56.33	RMS	33.4	.57	-38.89	51.41	54	-2.59	-	-	307	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

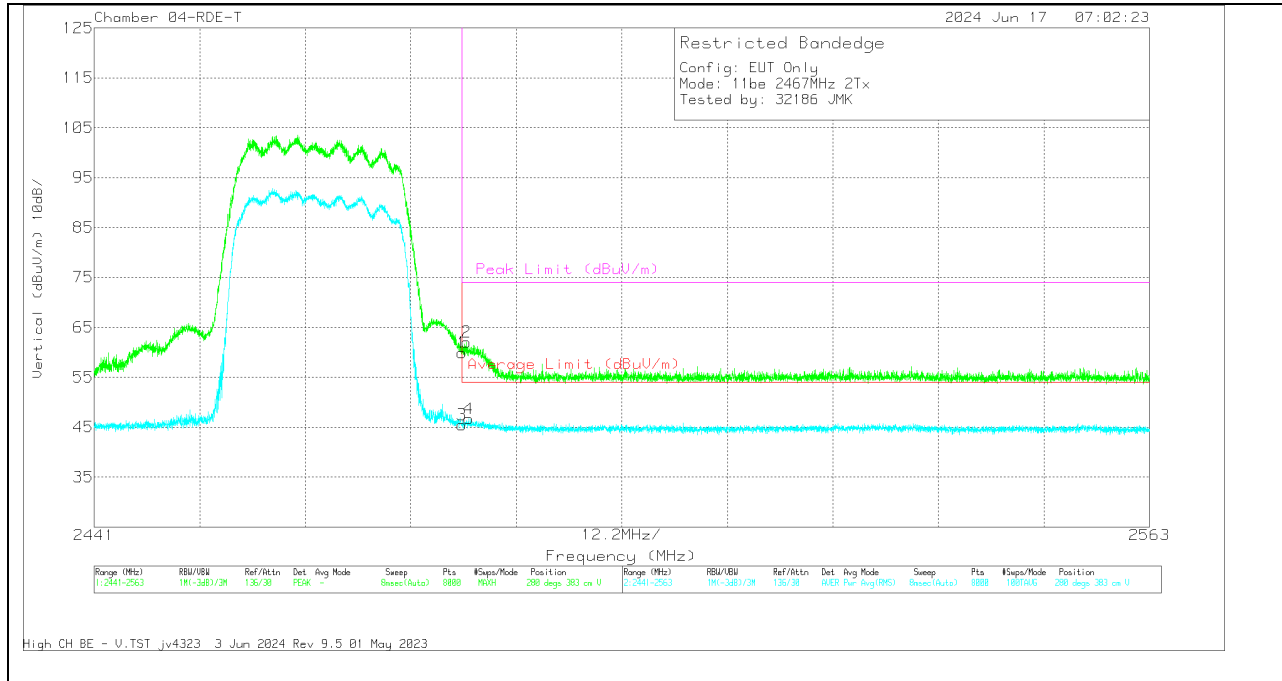


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80430 3m ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	65.41	Pk	33.4	0	-38.87	59.94	-	-	74	-14.06	280	383	V
2	* 2484.056	67.52	Pk	33.4	0	-38.89	62.03	-	-	74	-11.97	280	383	V
3	* 2483.5	50.42	RMS	33.4	.57	-38.87	45.52	54	-8.48	-	-	280	383	V
4	* 2484.316	51.57	RMS	33.4	.57	-38.87	46.67	54	-7.33	-	-	280	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

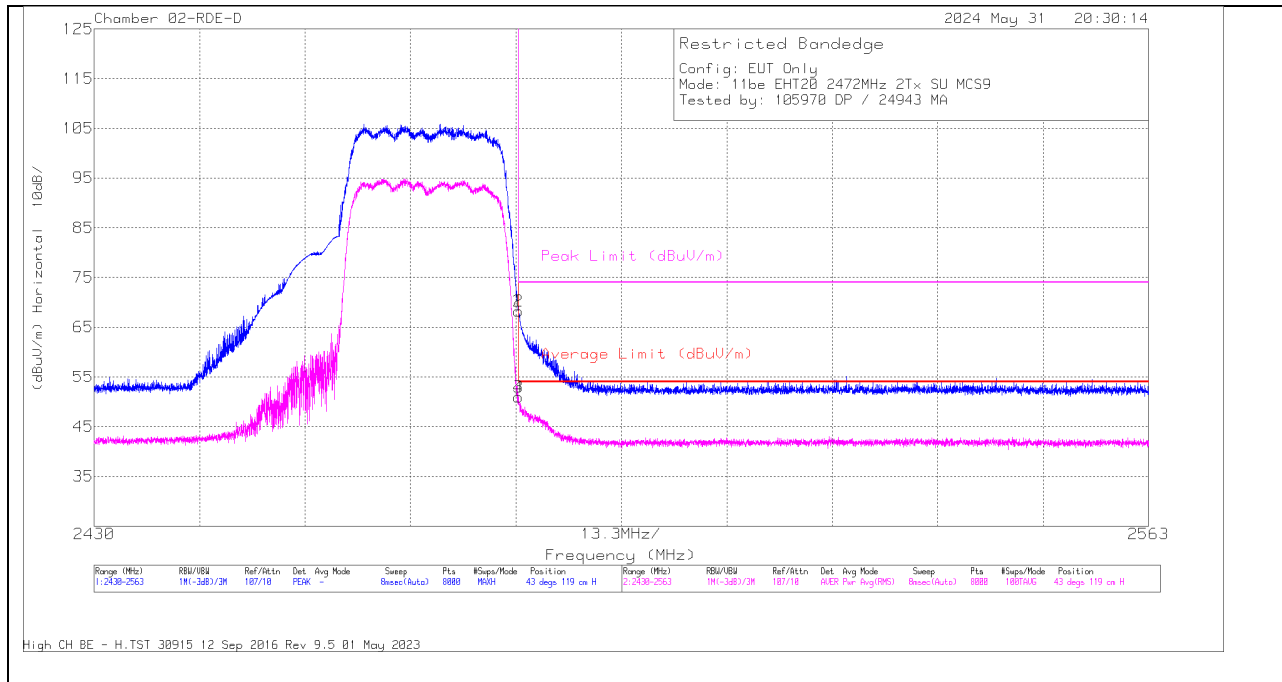

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.45	Pk	32.4	-19.6	0	68.25	-	-	74	-5.75	43	119	H
2	* 2483.522	55.42	Pk	32.4	-19.6	0	68.22	-	-	74	-5.78	43	119	H
3	* 2483.5	37.64	RMS	32.4	-19.6	.57	51.01	54	-2.99	-	-	43	119	H
4	* 2483.506	37.53	RMS	32.4	-19.6	.57	50.9	54	-3.1	-	-	43	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT


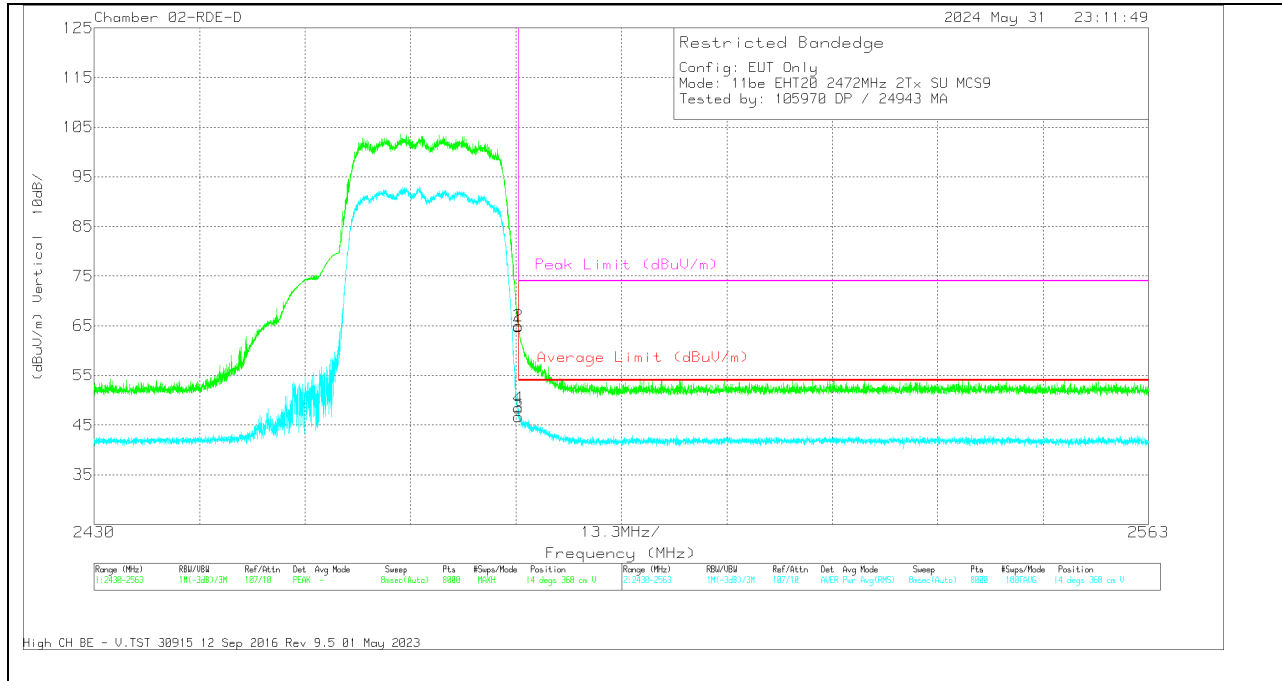


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	20089 6 ACF (dB/m)	Amp/C bl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.97	Pk	32.4	-19.6	0	64.77	-	-	74	-9.23	14	368	V
2	* 2483.522	52.16	Pk	32.4	-19.6	0	64.96	-	-	74	-9.04	14	368	V
3	* 2483.5	33.34	RMS	32.4	-19.6	.57	46.71	54	-7.29	-	-	14	368	V
4	* 2483.556	35.08	RMS	32.4	-19.6	.57	48.45	54	-5.55	-	-	14	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.10. 802.11be EHT20 26-Tones HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

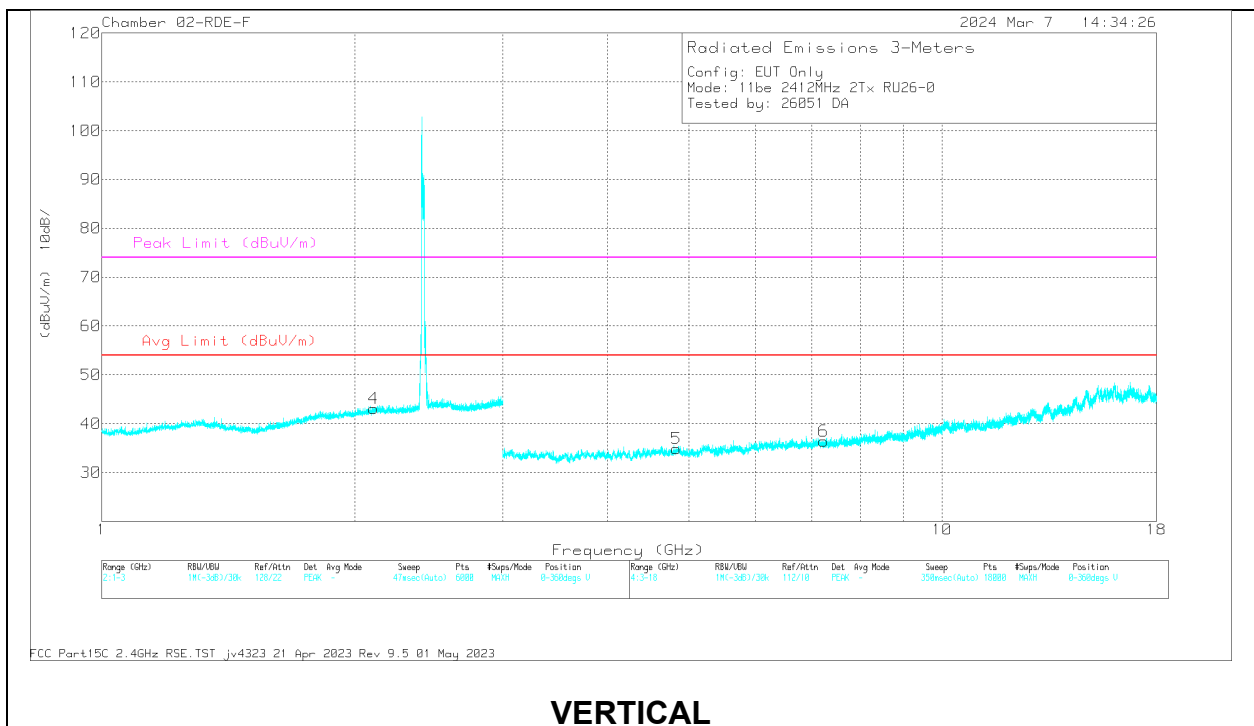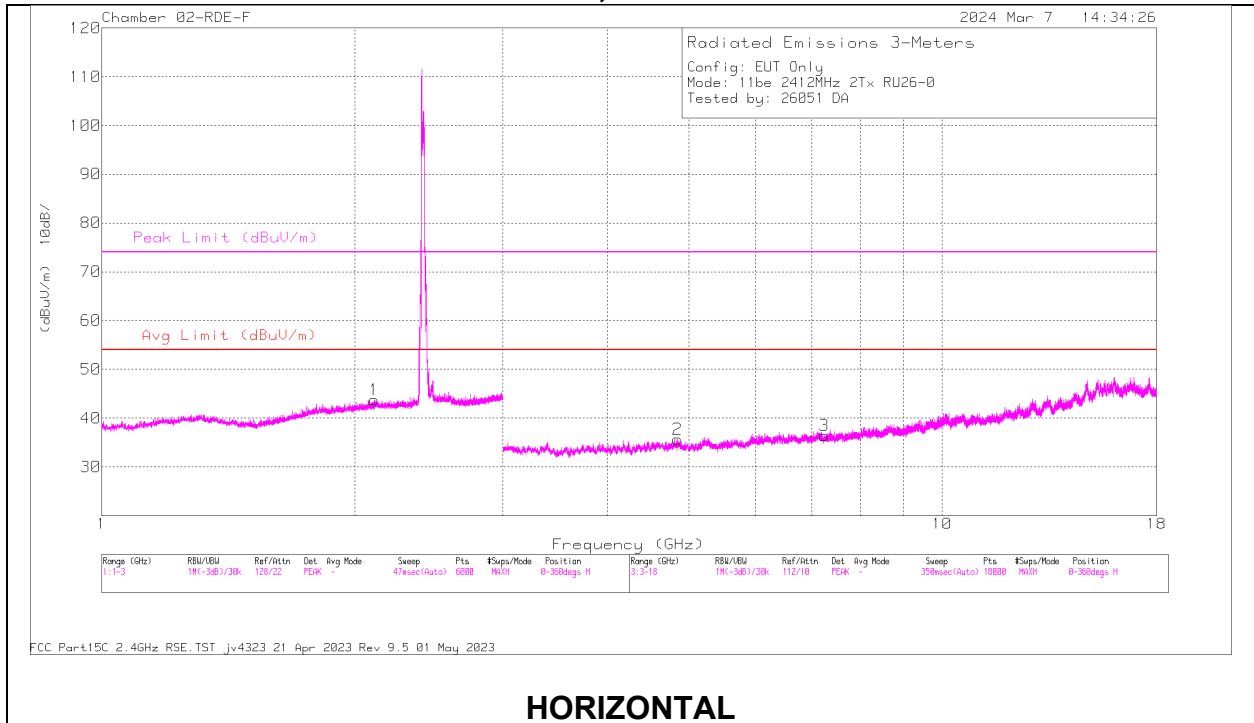

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.844551	56.79	PK2	33.9	-45.9	44.79	-	-	74	-29.21	360	101	H
2	* 4.842988	45.39	MAv1	33.9	-45.9	33.39	54	-20.61	-	-	360	101	H
5	* 4.825822	57.24	PK2	34	-46.1	45.14	-	-	74	-28.86	360	200	V
5	* 4.827052	45.55	MAv1	34	-46	33.55	54	-20.45	-	-	360	200	V
4	2.105965	60.33	PK2	31.5	-38.7	53.13	-	-	-	-	360	101	V
4	2.106386	48.67	MAv1	31.5	-38.7	41.47	-	-	-	-	360	101	V
1	2.111843	60.44	PK2	31.5	-38.7	53.24	-	-	-	-	360	200	H
1	2.113004	48.49	MAv1	31.5	-38.7	41.29	-	-	-	-	360	200	H
6	7.229616	43.66	MAv1	35.6	-44.7	34.56	-	-	-	-	360	200	V
6	7.232194	55.46	PK2	35.6	-44.8	46.26	-	-	-	-	360	200	V
3	7.236173	55.03	PK2	35.6	-44.5	46.13	-	-	-	-	360	101	H
3	7.23747	43.48	MAv1	35.6	-44.4	34.68	-	-	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

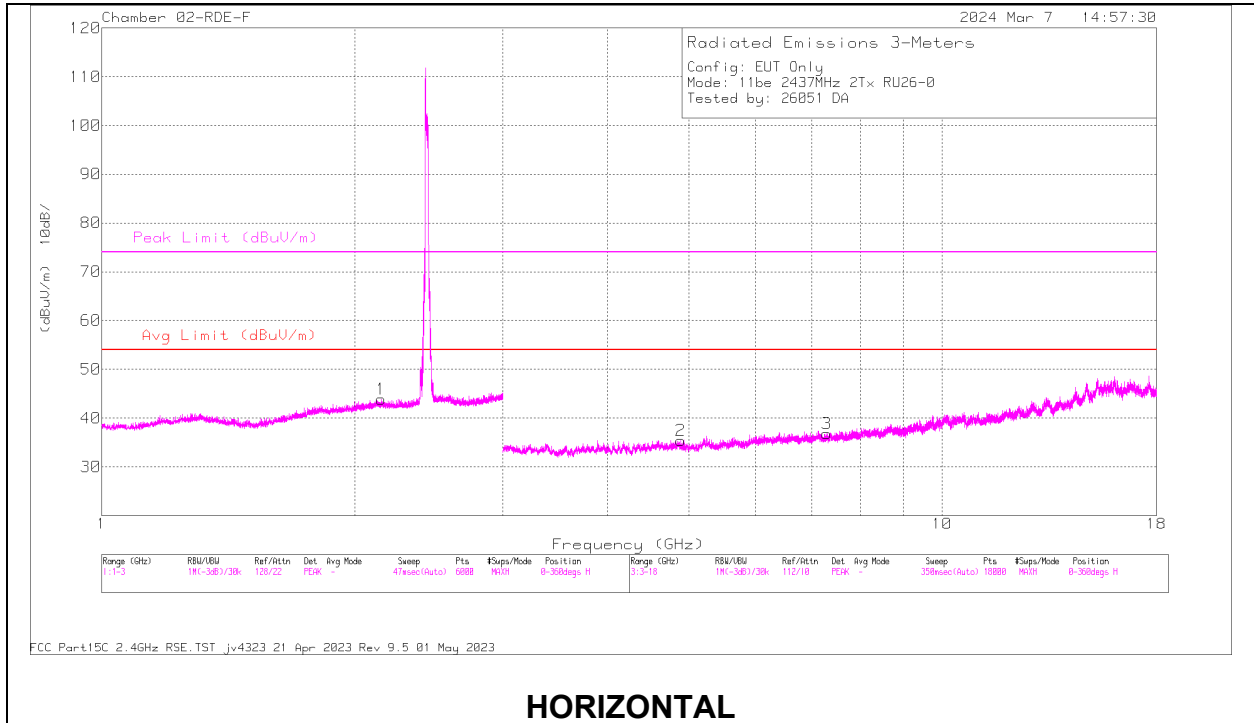

HORIZONTAL

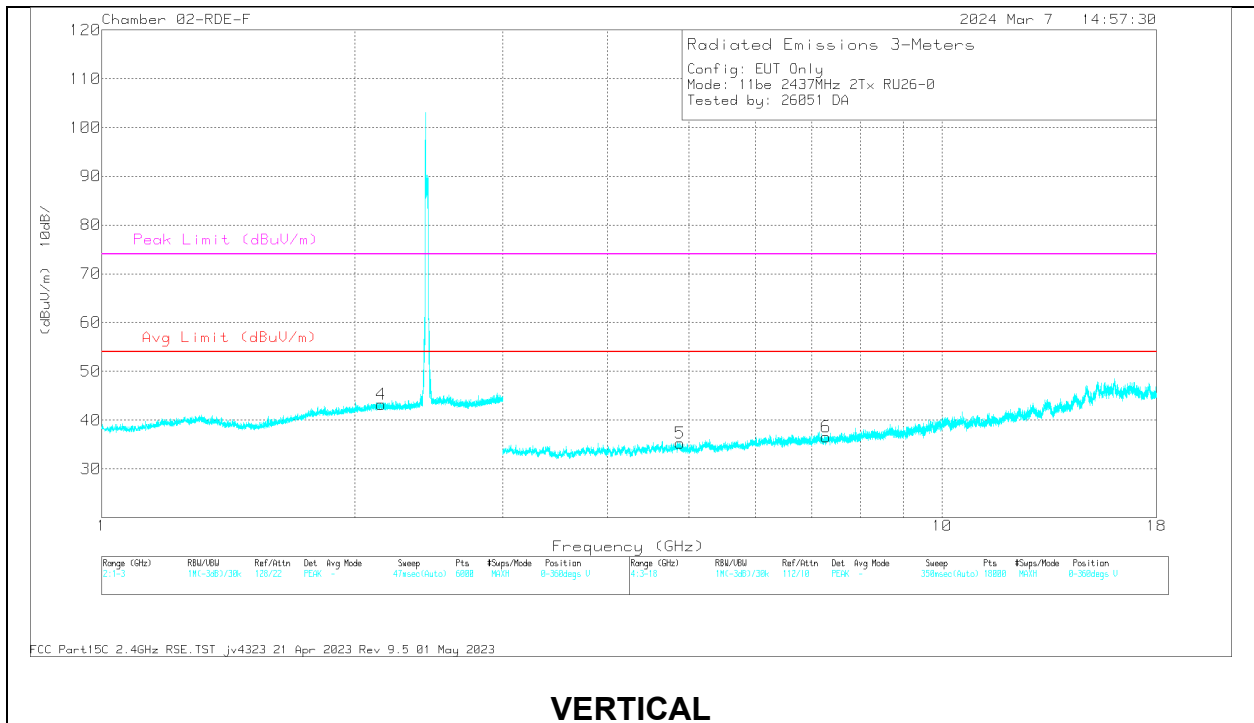

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.88384	56.57	PK2	33.9	-45.7	44.77	-	-	74	-29.23	360	200	H
2	* 4.884784	45.02	MAv1	33.9	-45.6	33.32	54	-20.68	-	-	360	200	H
3	* 7.287974	55.26	PK2	35.6	-44.3	46.56	-	-	74	-27.44	360	101	H
3	* 7.286956	43.68	MAv1	35.6	-44.2	35.08	54	-18.92	-	-	360	101	H
5	* 4.883003	56.8	PK2	33.9	-45.8	44.9	-	-	74	-29.1	360	200	V
5	* 4.8812	45.01	MAv1	33.9	-45.8	33.11	54	-20.89	-	-	360	200	V
6	* 7.28539	55.81	PK2	35.6	-44.2	47.21	-	-	74	-26.79	360	101	V
6	* 7.286438	44.23	MAv1	35.6	-44.2	35.63	54	-18.37	-	-	360	101	V
4	2.147539	48.66	MAv1	31.6	-38.7	41.56	-	-	-	-	360	200	V
4	2.14997	60.01	PK2	31.6	-38.7	52.91	-	-	-	-	360	200	V
1	2.151948	48.61	MAv1	31.6	-38.8	41.41	-	-	-	-	360	200	H
1	2.15265	60.61	PK2	31.6	-38.8	53.41	-	-	-	-	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

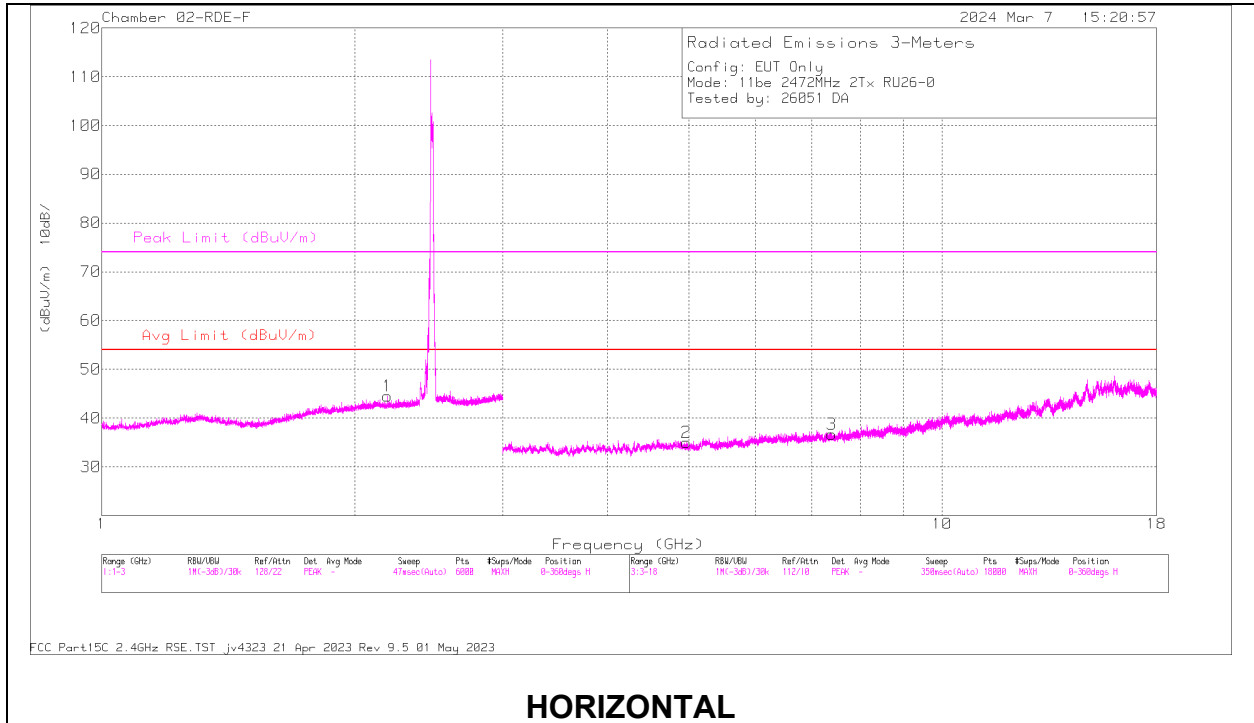

HORIZONTAL

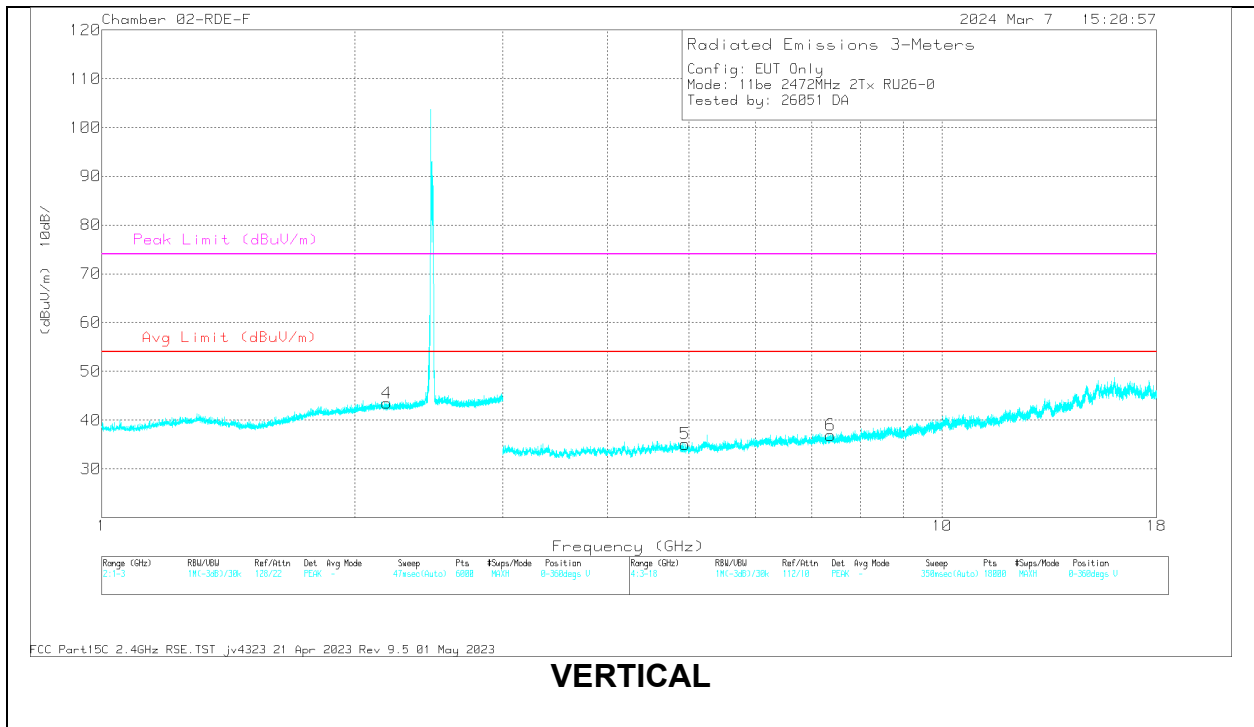

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.967152	57.03	PK2	33.9	-46	44.93	-	-	74	-29.07	360	200	H
2	* 4.966481	45.27	MAv1	33.9	-46	33.17	54	-20.83	-	-	360	200	H
3	* 7.393055	55.11	PK2	35.6	-44.1	46.61	-	-	74	-27.39	360	200	H
3	* 7.390701	43.65	MAv1	35.6	-44.1	35.15	54	-18.85	-	-	360	200	H
5	* 4.944936	56.62	PK2	33.9	-45.7	44.82	-	-	74	-29.18	360	200	V
5	* 4.945407	45.04	MAv1	33.9	-45.7	33.24	54	-20.76	-	-	360	200	V
6	* 7.363842	54.92	PK2	35.6	-43.8	46.72	-	-	74	-27.28	360	200	V
6	* 7.364726	43.52	MAv1	35.6	-43.9	35.22	54	-18.78	-	-	360	200	V
4	2.186568	60.17	PK2	31.7	-38.8	53.07	-	-	-	-	360	200	V
1	2.186851	48.25	MAv1	31.7	-38.8	41.15	-	-	-	-	360	200	H
4	2.187378	48.59	MAv1	31.7	-38.8	41.49	-	-	-	-	360	200	V
1	2.189281	59.59	PK2	31.7	-38.8	52.49	-	-	-	-	360	200	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.11. 802.11be EHT20, SU 2TX HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

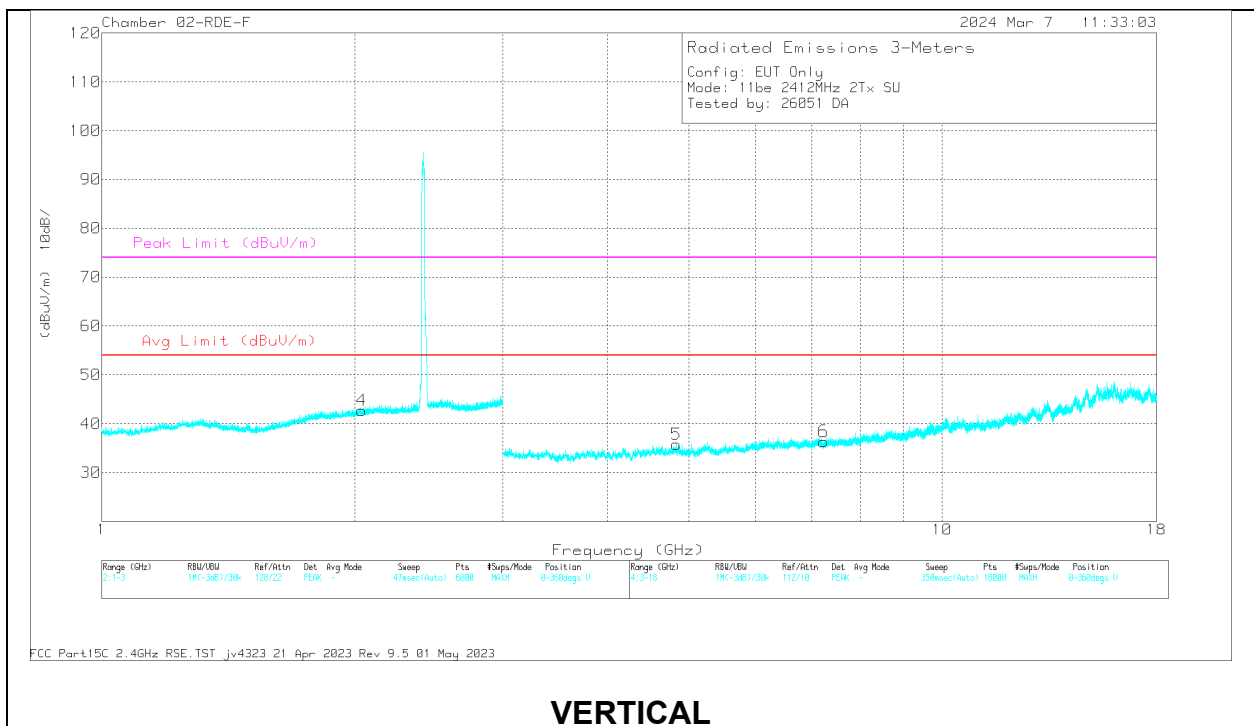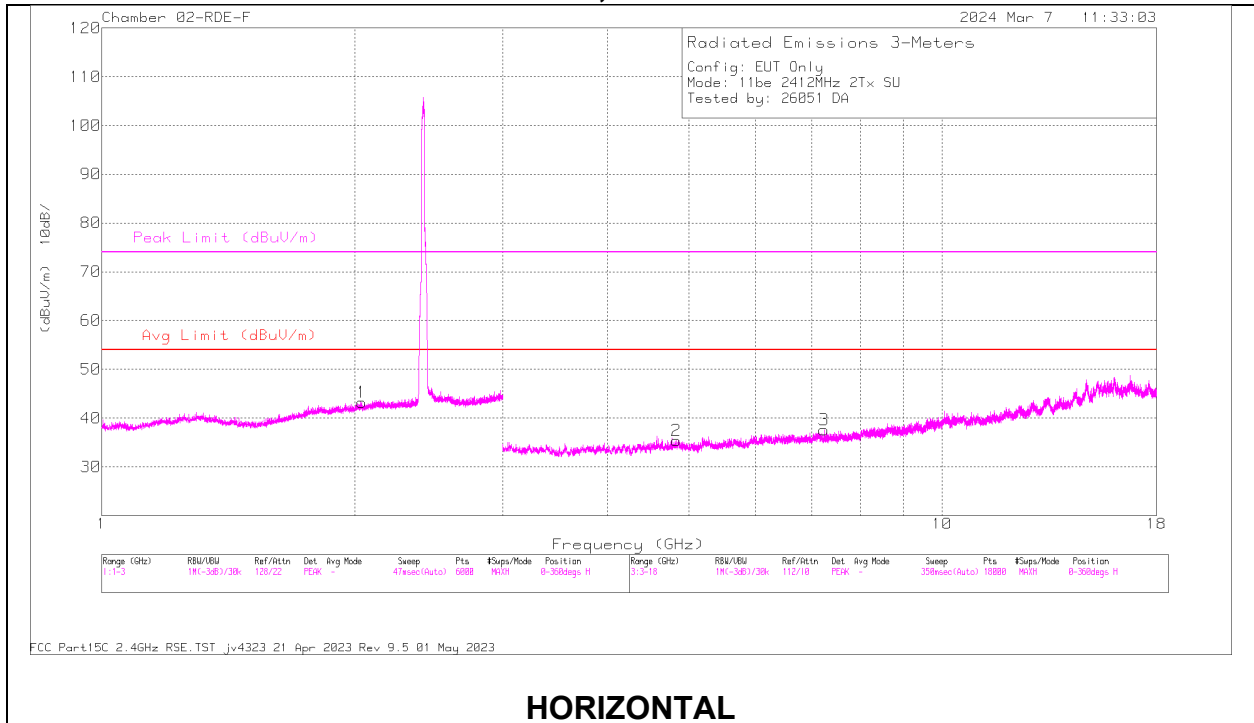

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.827744	56.91	PK2	34	-46	44.91	-	-	74	-29.09	360	200	H
2	* 4.827304	45.62	MAv1	34	-46	33.62	54	-20.38	-	-	360	200	H
5	* 4.828982	57.21	PK2	34	-46.1	45.11	-	-	74	-28.89	360	200	V
5	* 4.82801	45.57	MAv1	34	-46	33.57	54	-20.43	-	-	360	200	V
1	2.037841	59.94	PK2	31.2	-38.6	52.54	-	-	-	-	360	199	H
1	2.037966	48.29	MAv1	31.2	-38.6	40.89	-	-	-	-	360	199	H
4	2.039462	60.43	PK2	31.2	-38.7	52.93	-	-	-	-	360	101	V
4	2.040034	48.52	MAv1	31.2	-38.7	41.02	-	-	-	-	360	101	V
6	7.227931	43.63	MAv1	35.6	-44.6	34.63	-	-	-	-	360	200	V
6	7.228525	55.49	PK2	35.6	-44.7	46.39	-	-	-	-	360	200	V
3	7.23556	43.6	MAv1	35.6	-44.6	34.6	-	-	-	-	360	200	H
3	7.2367	55.25	PK2	35.6	-44.5	46.35	-	-	-	-	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

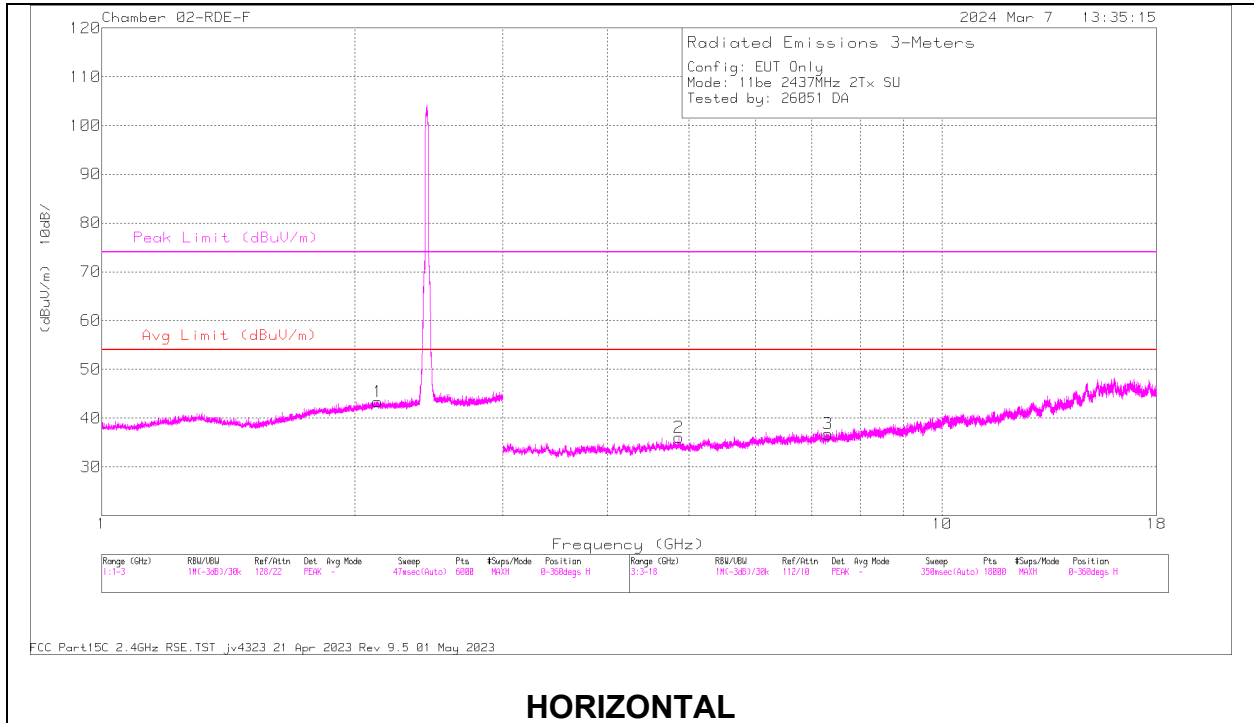

HORIZONTAL

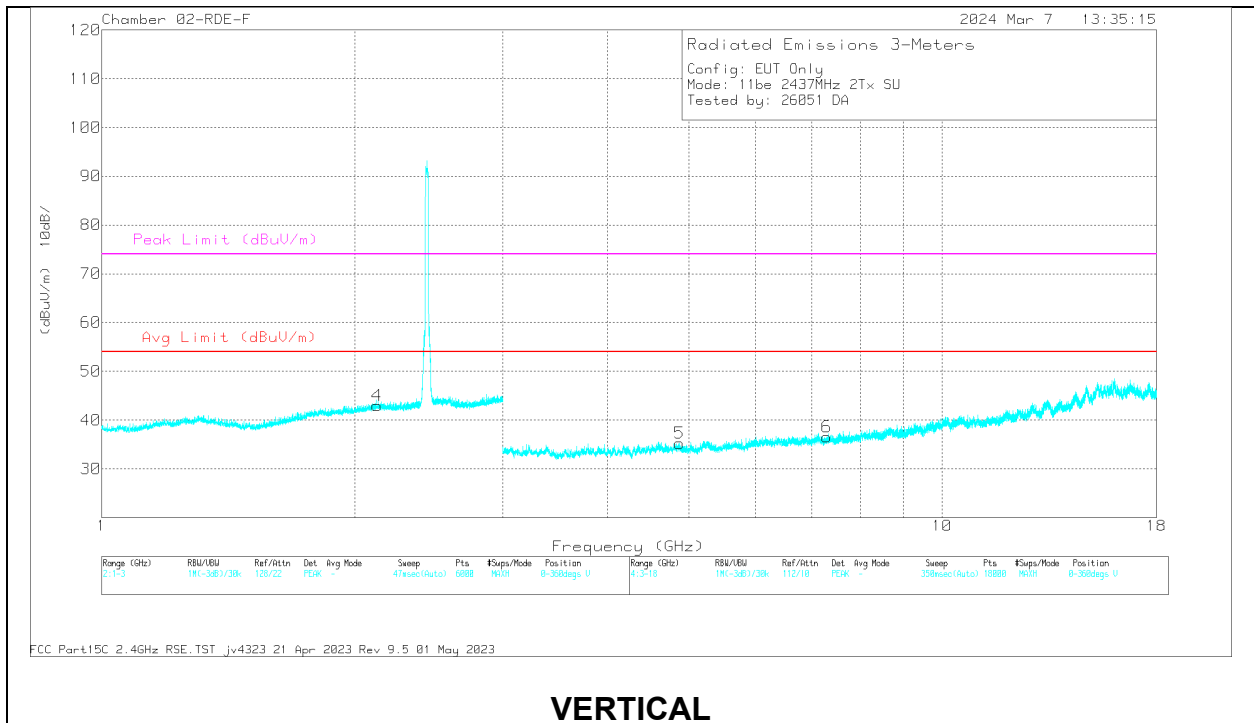

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.866607	56.82	PK2	33.9	-46	44.72	-	-	74	-29.28	360	200	H
2	* 4.866209	45.32	MAv1	33.9	-46	33.22	54	-20.78	-	-	360	200	H
3	* 7.31619	55.16	PK2	35.6	-44.2	46.56	-	-	74	-27.44	360	101	H
3	* 7.315869	43.5	MAv1	35.6	-44.2	34.9	54	-19.1	-	-	360	101	H
5	* 4.869476	57.23	PK2	33.9	-45.9	45.23	-	-	74	-28.77	360	200	V
5	* 4.871294	45.35	MAv1	33.9	-45.8	33.45	54	-20.55	-	-	360	200	V
6	* 7.288322	55.48	PK2	35.6	-44.3	46.78	-	-	74	-27.22	360	200	V
6	* 7.291127	43.73	MAv1	35.6	-44.4	34.93	54	-19.07	-	-	360	200	V
4	2.125538	48.69	MAv1	31.6	-38.7	41.59	-	-	-	-	360	200	V
4	2.128851	60.33	PK2	31.6	-38.7	53.23	-	-	-	-	360	200	V
1	2.129334	60.37	PK2	31.6	-38.7	53.27	-	-	-	-	360	101	H
1	2.130872	48.47	MAv1	31.6	-38.8	41.27	-	-	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

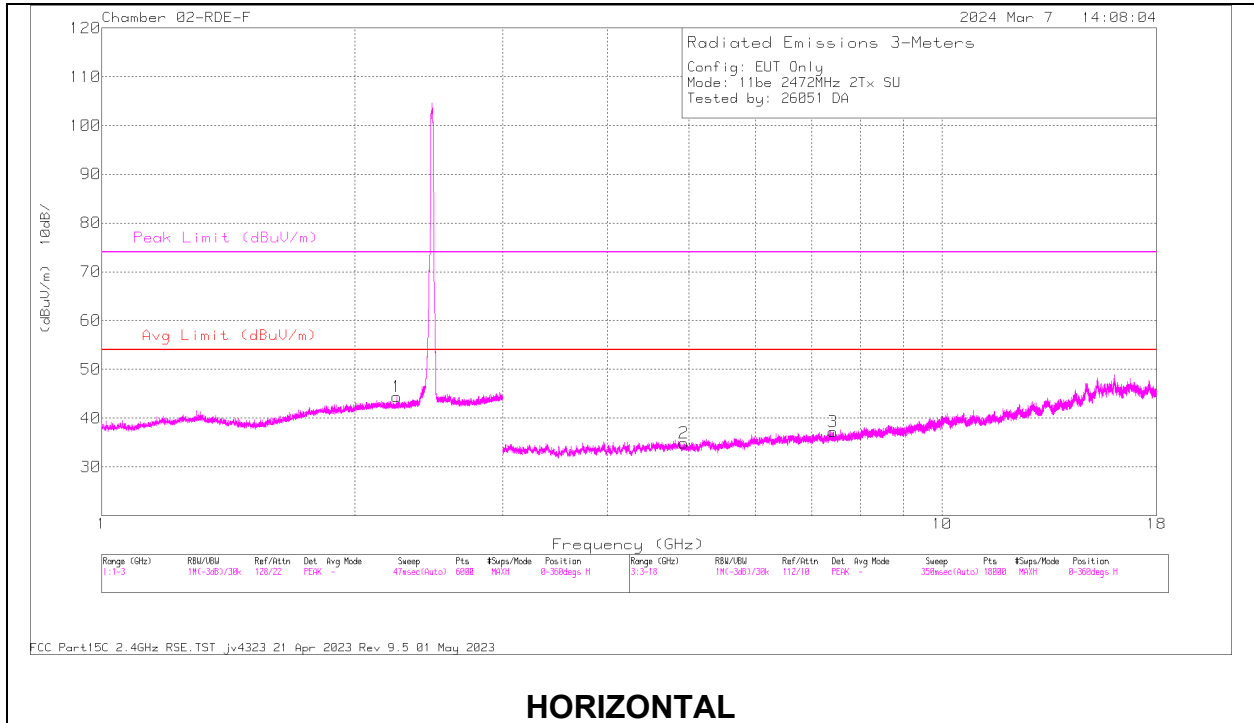

HORIZONTAL

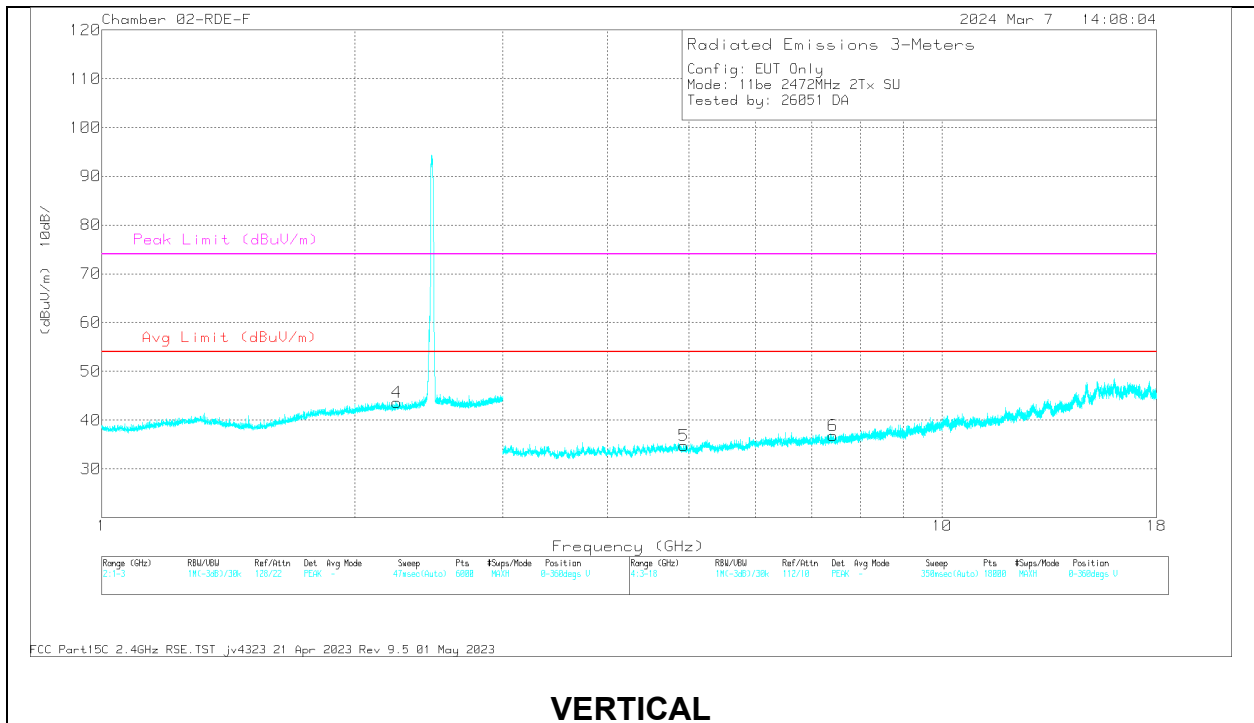

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m) 3mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.243265	59.99	PK2	31.8	-38.9	52.89	-	-	74	-21.11	360	101	H
1	* 2.24457	48.29	MAv1	31.8	-38.9	41.19	54	-12.81	-	-	360	101	H
4	* 2.244605	60.32	PK2	31.8	-38.9	53.22	-	-	74	-20.78	360	200	V
4	* 2.241651	48.76	MAv1	31.8	-38.9	41.66	54	-12.34	-	-	360	200	V
2	* 4.930286	56.54	PK2	33.9	-45.7	44.74	-	-	74	-29.26	360	200	H
2	* 4.931457	44.89	MAv1	33.9	-45.6	33.19	54	-20.81	-	-	360	200	H
3	* 7.422187	55.99	PK2	35.6	-44.1	47.49	-	-	74	-26.51	360	200	H
3	* 7.422577	43.55	MAv1	35.6	-44.2	34.95	54	-19.05	-	-	360	200	H
5	* 4.930488	56.24	PK2	33.9	-45.6	44.54	-	-	74	-29.46	360	200	V
5	* 4.931481	44.82	MAv1	33.9	-45.6	33.12	54	-20.88	-	-	360	200	V
6	* 7.41365	54.95	PK2	35.6	-44.2	46.35	-	-	74	-27.65	360	101	V
6	* 7.416001	43.46	MAv1	35.6	-44.1	34.96	54	-19.04	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 1 GHz

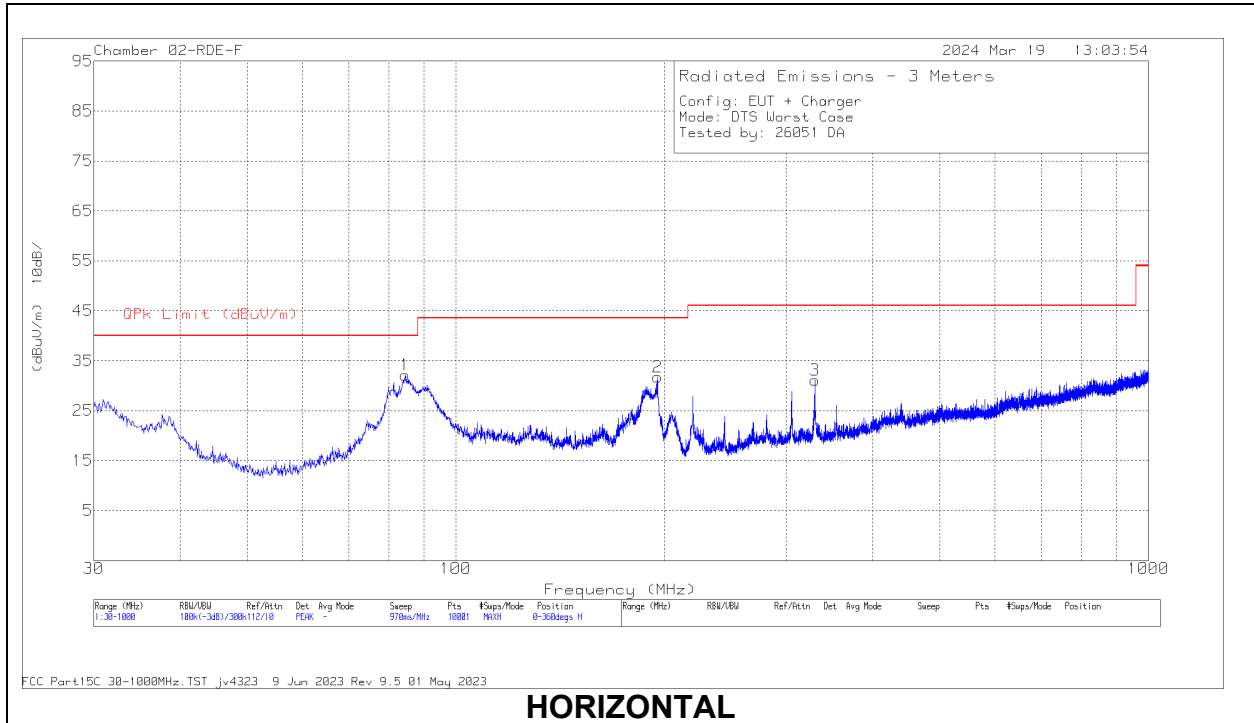

HORIZONTAL

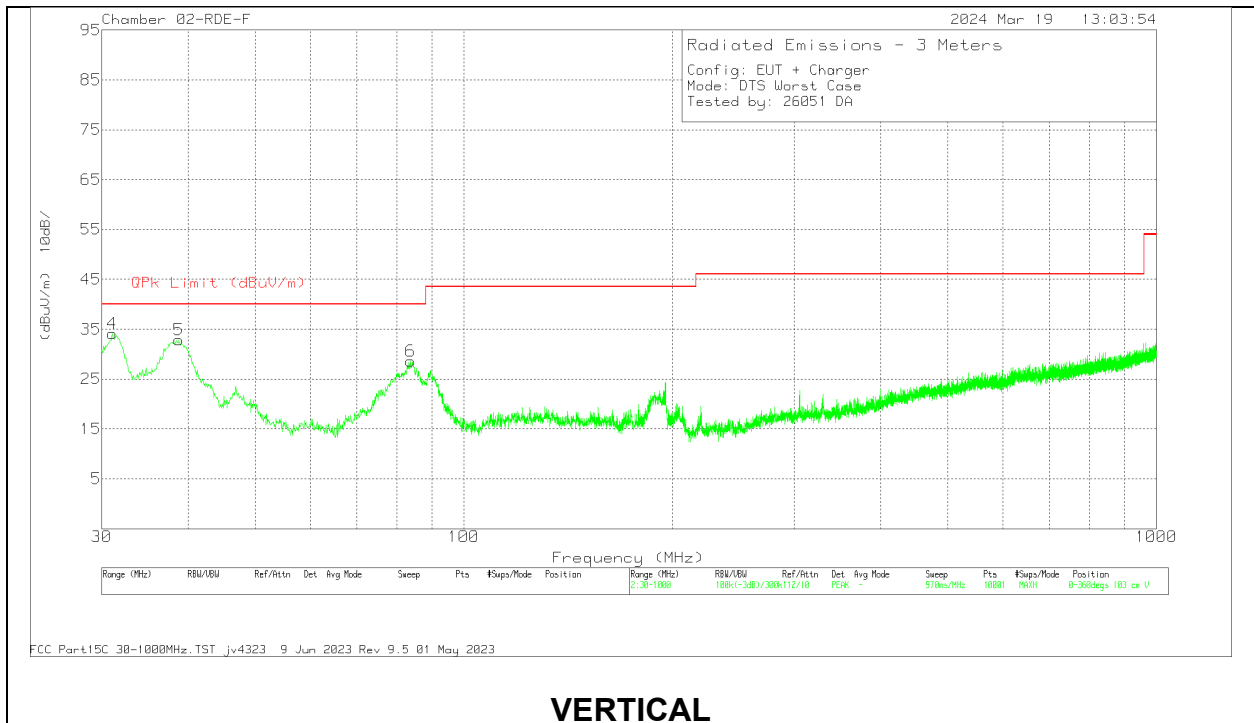

VERTICAL

Below 1GHz DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	230634 ACF (dB/m) 10m H	CBL/AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 329.924	41.2	Pk	19.6	-29.7	31.1	46.02	-14.92	0-360	102	H
4	31.067	39.69	Pk	26.1	-31.7	34.09	40	-5.91	0-360	103	V
	31.161	35.69	Qp	25.8	-31.7	29.79	40	-10.21	304	110	V
5	38.73	44.42	Pk	20.3	-31.8	32.92	40	-7.08	0-360	103	V
	38.94	40.02	Qp	20.1	-31.8	28.32	40	-11.68	169	104	V
6	83.738	46.47	Pk	13.2	-31.1	28.57	40	-11.43	0-360	198	V
1	84.514	50.07	Pk	13.2	-31.1	32.17	40	-7.83	0-360	299	H
2	195.482	44.35	Pk	17.7	-30.3	31.75	43.52	-11.77	0-360	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.3. WORST CASE 18-26 GHz

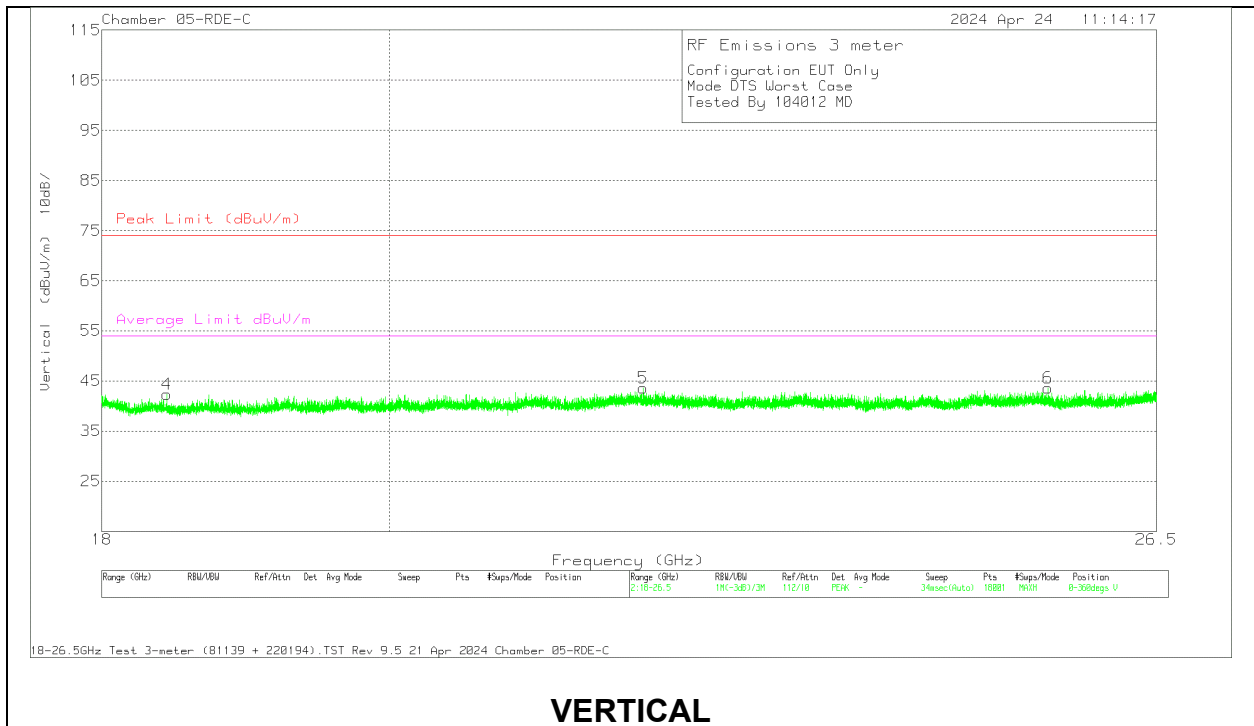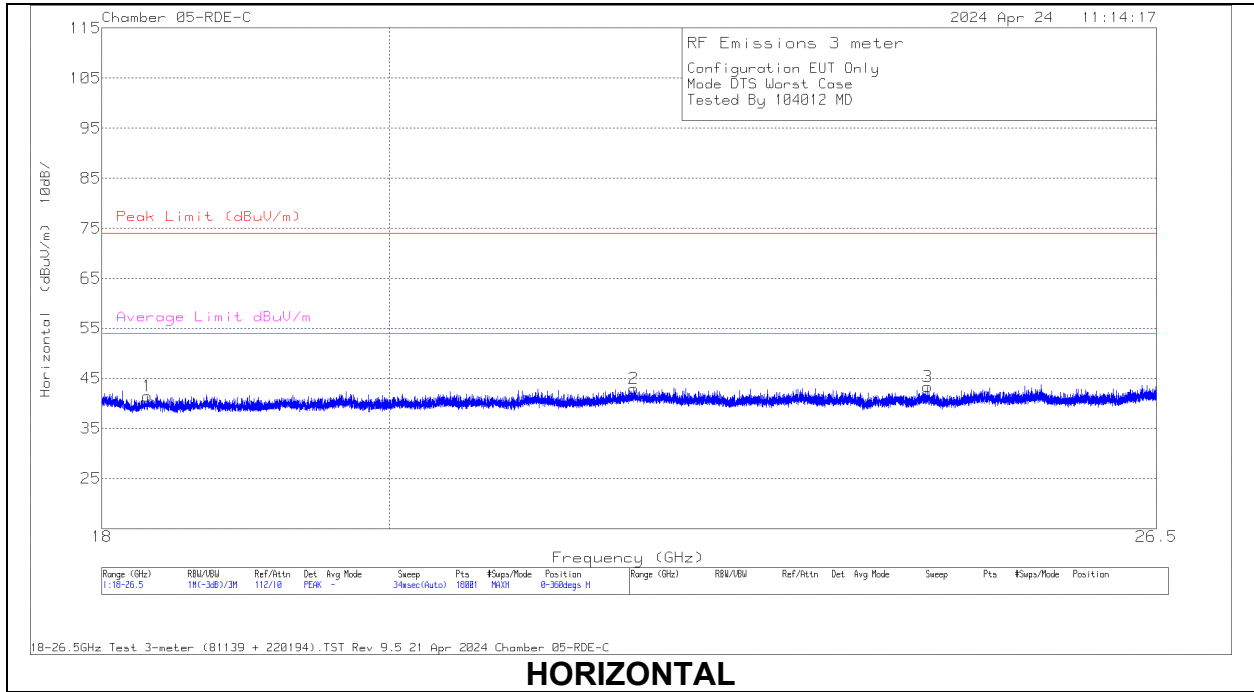

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	Amp/Cbl (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	18.303167	58.28	Pk	32.4	-61.7	12.5	41.48	74	-32.52	54	-12.52	0-360	101	H
4	18.435861	59.2	Pk	32.5	-61.9	12.5	42.3	74	-31.7	54	-11.70	0-360	101	V
2	21.878359	56.9	Pk	33.5	-61.1	13.7	43	74	-31	54	-11.00	0-360	101	H
5	21.955331	57.66	Pk	33.5	-61.3	13.7	43.56	74	-30.44	54	-10.44	0-360	200	V
3	24.367914	57.39	Pk	34	-62.5	14.5	43.39	74	-30.61	54	-10.61	0-360	101	H
6	25.467719	55.95	Pk	34.3	-61.4	14.8	43.65	74	-30.35	54	-10.35	0-360	200	V

PK - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC POWER LINE WITH AC/DC ADAPTER


LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.177	1.72	Ca	.1	.1	9.4	10	0	21.32	54.63	-33.31	-	-
4	.2355	18.83	Ca	0	0	9.4	10	0	38.23	52.25	-14.02	-	-
6	.4718	-5.43	Ca	.1	0	9.3	10	0	13.97	46.48	-32.51	-	-
8	.9443	-3.65	Ca	.1	0	9.3	10	0	15.75	46	-30.25	-	-
10	1.1805	-4.4	Ca	.1	0	9.4	10	0	19.06	46	-26.94	-	-
12	13.56	-7.32	Ca	.3	.1	9.5	10	0	12.58	50	-37.42	-	-
1	.177	7.75	Qp	.1	.1	9.4	10	0	27.35	-	-	64.63	-37.28
3	.2355	23.29	Qp	0	0	9.4	10	0	42.69	-	-	62.25	-19.56
5	.4718	.96	Qp	.1	0	9.3	10	0	20.36	-	-	56.48	-36.12
7	.9443	1.91	Qp	.1	0	9.3	10	0	21.31	-	-	56	-34.69
9	1.1805	5.11	Qp	.1	0	9.4	10	0	24.61	-	-	56	-31.39
11	13.56	-.08	Qp	.3	.1	9.5	10	0	19.82	-	-	60	-40.18

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

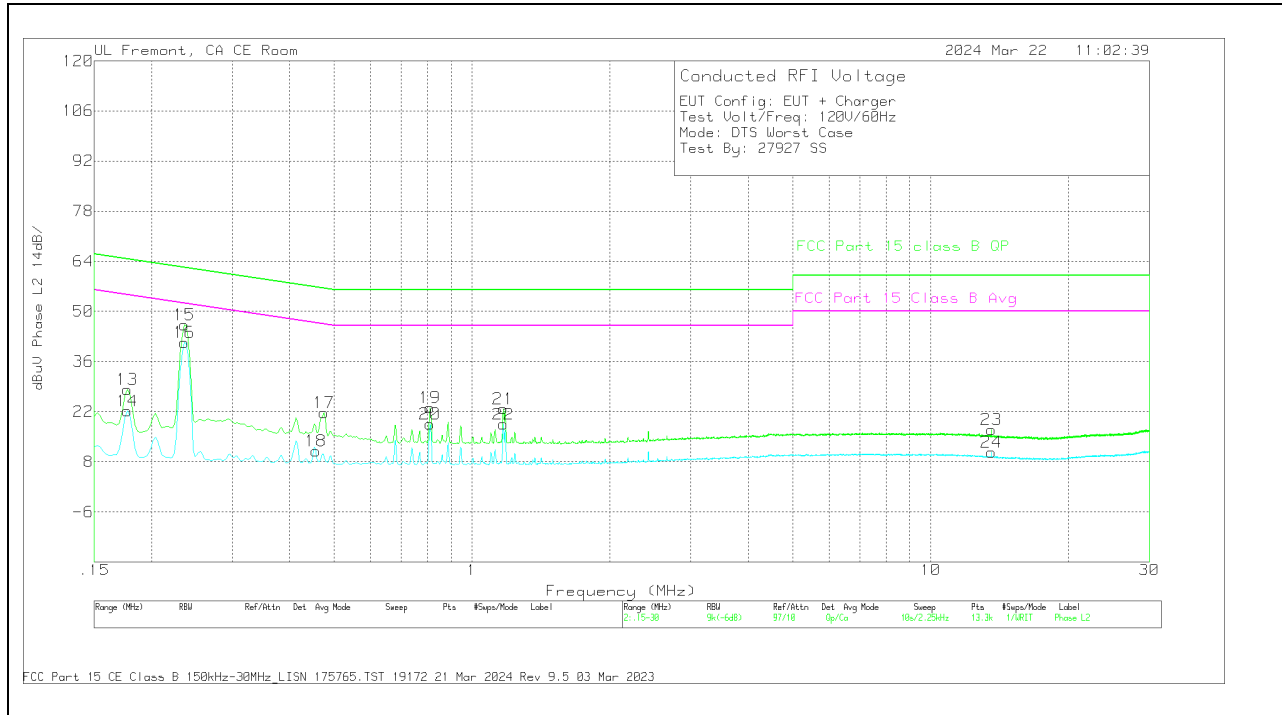


Range 2: Phase L2 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cpl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B OP dBuV	Margin (dB)
14	.177	2.65	Ca	.1	0	9.4	10	0	22.15	54.63	-32.48	-	-
16	.2355	21.94	Ca	0	0	9.4	10	0	41.34	52.25	-10.91	-	-
18	.456	-8.36	Ca	0	0	9.3	10	0	10.94	46.77	-35.83	-	-
20	.8093	-7.3	Ca	0	0	9.3	10	0	18.57	46	-27.43	-	-
22	1.1693	-1.14	Ca	.2	0	9.4	10	0	18.46	46	-27.54	-	-
24	13.56	-9.2	Ca	.2	.1	9.5	10	0	10.6	50	-39.4	-	-
13	.177	8.71	Qp	.1	0	9.4	10	0	28.21	-	-	64.63	-36.42
15	.2355	26.9	Qp	0	0	9.4	10	0	46.3	-	-	62.25	-15.95
17	.4763	2.37	Qp	0	0	9.3	10	0	21.67	-	-	56.4	-34.73
19	.8093	3.81	Qp	0	0	9.3	10	0	23.11	-	-	56	-32.89
21	1.1693	3.23	Qp	.2	0	9.4	10	0	22.83	-	-	56	-33.17
23	13.56	-2.82	Qp	.2	.1	9.5	10	0	16.98	-	-	60	-43.02

Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

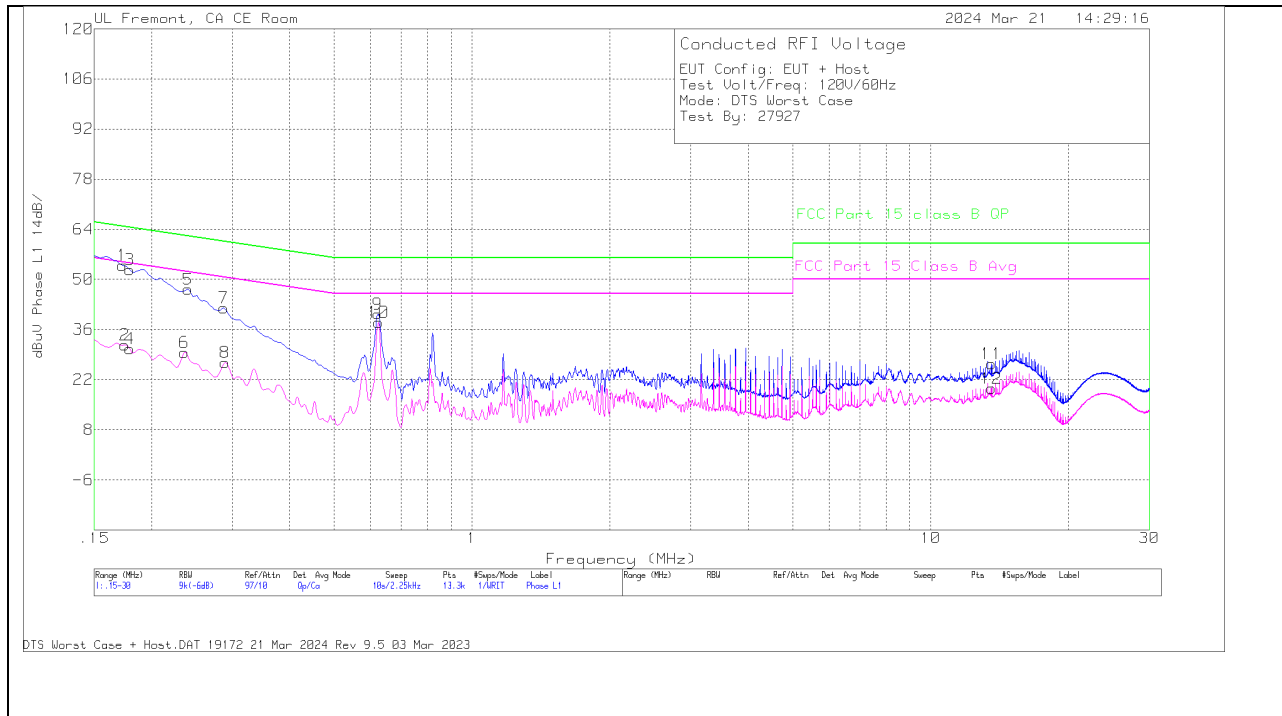

Range 1: Phase L1 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.1748	12.07	Ca	0	.1	9.5	10	0	31.67	54.73	-23.06	-	-
4	.1793	11.06	Ca	.1	.1	9.4	10	0	30.66	54.52	-23.86	-	-
6	.2355	10.18	Ca	0	0	9.4	10	0	29.58	52.25	-22.67	-	-
8	.2895	7.33	Ca	.1	0	9.4	10	0	26.83	50.54	-23.71	-	-
10	.6248	18.63	Ca	0	0	9.4	10	0	38.03	46	-7.97	-	-
12	13.56	-39	Ca	.3	.1	9.5	10	0	19.51	50	-30.49	-	-
1	.1725	34.34	Qp	0	.1	9.5	10	0	53.94	-	-	64.84	-10.9
3	.1793	33.18	Qp	.1	.1	9.4	10	0	52.78	-	-	64.52	-11.74
5	.24	27.8	Qp	0	0	9.4	10	0	47.2	-	-	62.1	-14.9
7	.2873	22.49	Qp	.1	0	9.4	10	0	41.99	-	-	60.6	-18.61
9	.6225	20.95	Qp	0	0	9.4	10	0	40.35	-	-	56	-15.65
11	13.56	6.49	Qp	.3	.1	9.5	10	0	26.39	-	-	60	-33.61

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

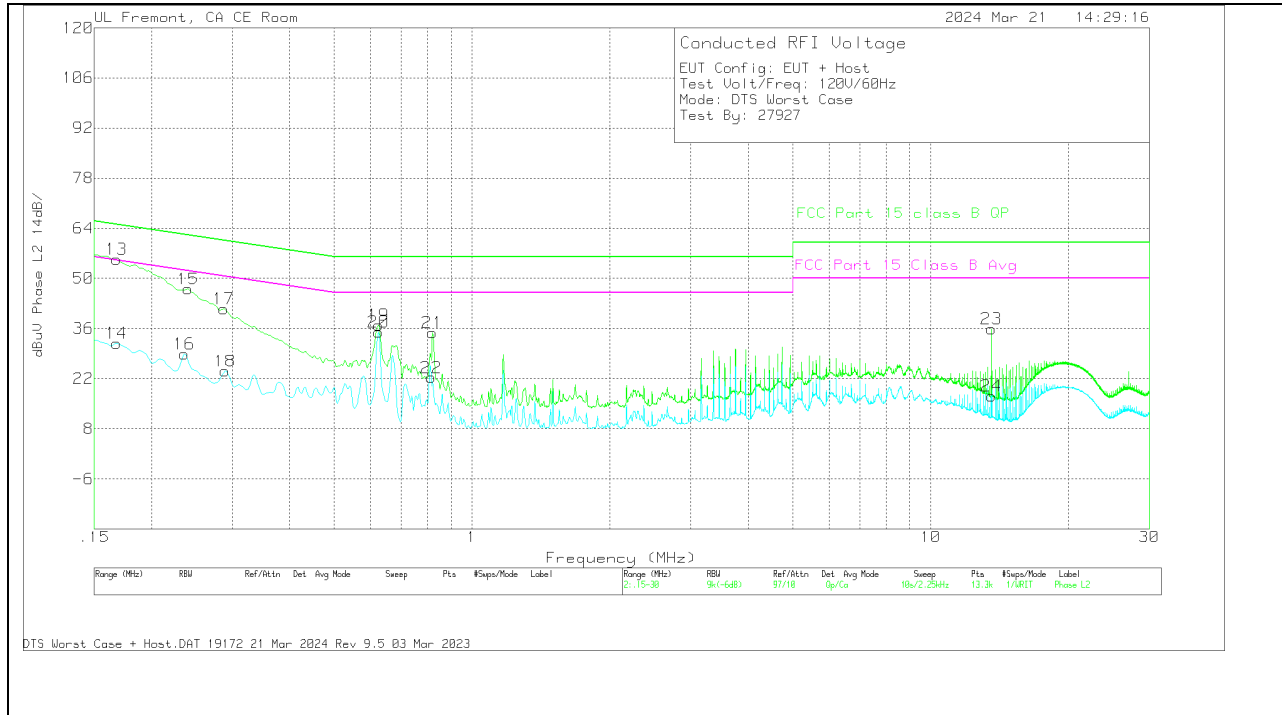

Range 2: Phase L2 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
14	.168	12.28	Ca	0	.1	9.5	10	0	31.88	55.06	-23.18	-	-
16	.2355	9.53	Ca	0	0	9.4	10	0	28.93	52.25	-23.32	-	-
18	.2895	4.58	Ca	.1	0	9.4	10	0	24.08	50.54	-26.46	-	-
20	.6248	15.48	Ca	.1	0	9.4	10	0	34.98	46	-11.02	-	-
22	.8138	3.01	Ca	0	0	9.3	10	0	22.31	46	-23.69	-	-
24	13.56	-2.68	Ca	.2	.1	9.5	10	0	17.12	50	-32.88	-	-
13	.168	35.77	Qp	0	.1	9.5	10	0	55.37	-	-	65.06	-9.69
15	.24	27.63	Qp	0	0	9.4	10	0	47.03	-	-	62.1	-15.07
17	.2873	22.03	Qp	.1	0	9.4	10	0	41.53	-	-	60.6	-19.07
19	.6248	17.45	Qp	.1	0	9.4	10	0	36.95	-	-	56	-19.05
21	.8205	15.52	Qp	0	0	9.3	10	0	34.82	-	-	56	-21.18
23	13.56	16.07	Qp	.2	.1	9.5	10	0	35.87	-	-	60	-24.13

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 14982436-EP1V1 for setup photos

END OF TEST REPORT