


VERTICAL RESULT

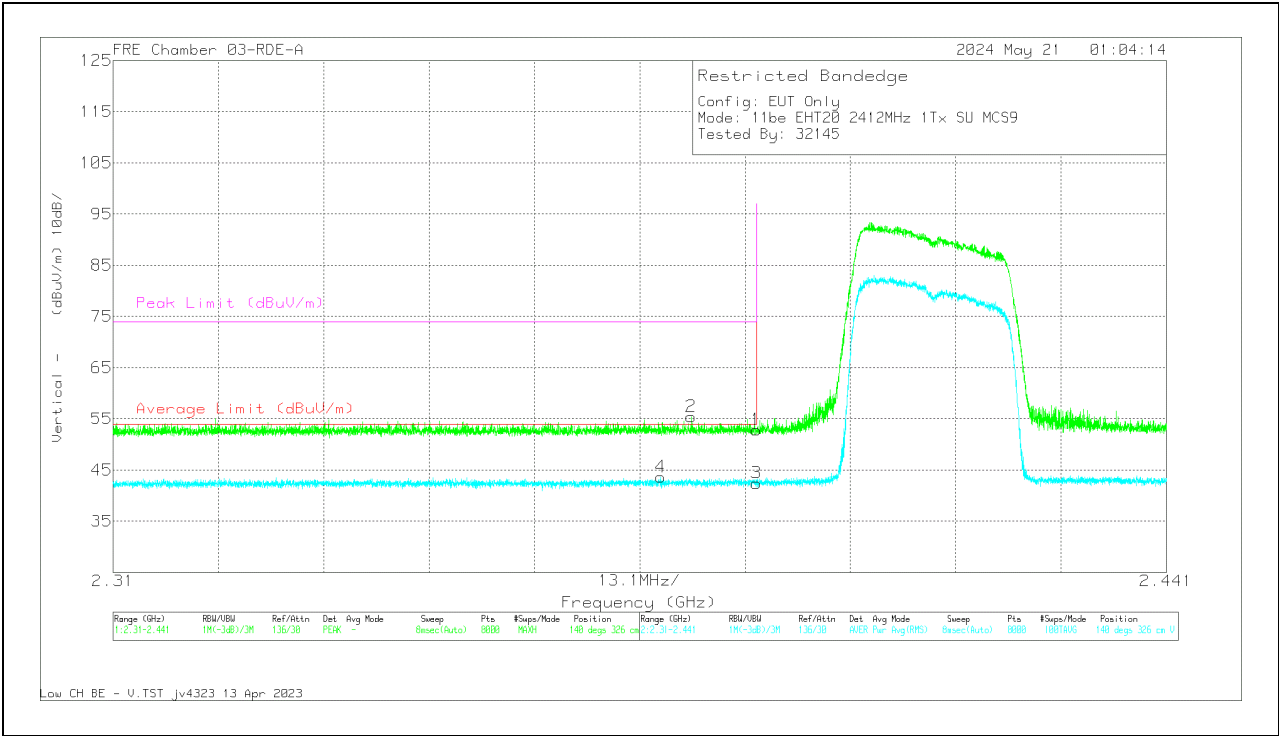


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.83	Pk	32.1	0	-40.07	52.86	-	-	74	-21.14	140	326	V
2	* 2.381895	63.46	Pk	32.1	0	-40.12	55.44	-	-	74	-18.56	140	326	V
3	* 2.39	49.86	RMS	32.1	.48	-40.07	42.29	54	-11.71	-	-	140	326	V
4	* 2.378079	51.04	RMS	32.1	.48	-40.06	43.48	54	-10.52	-	-	140	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

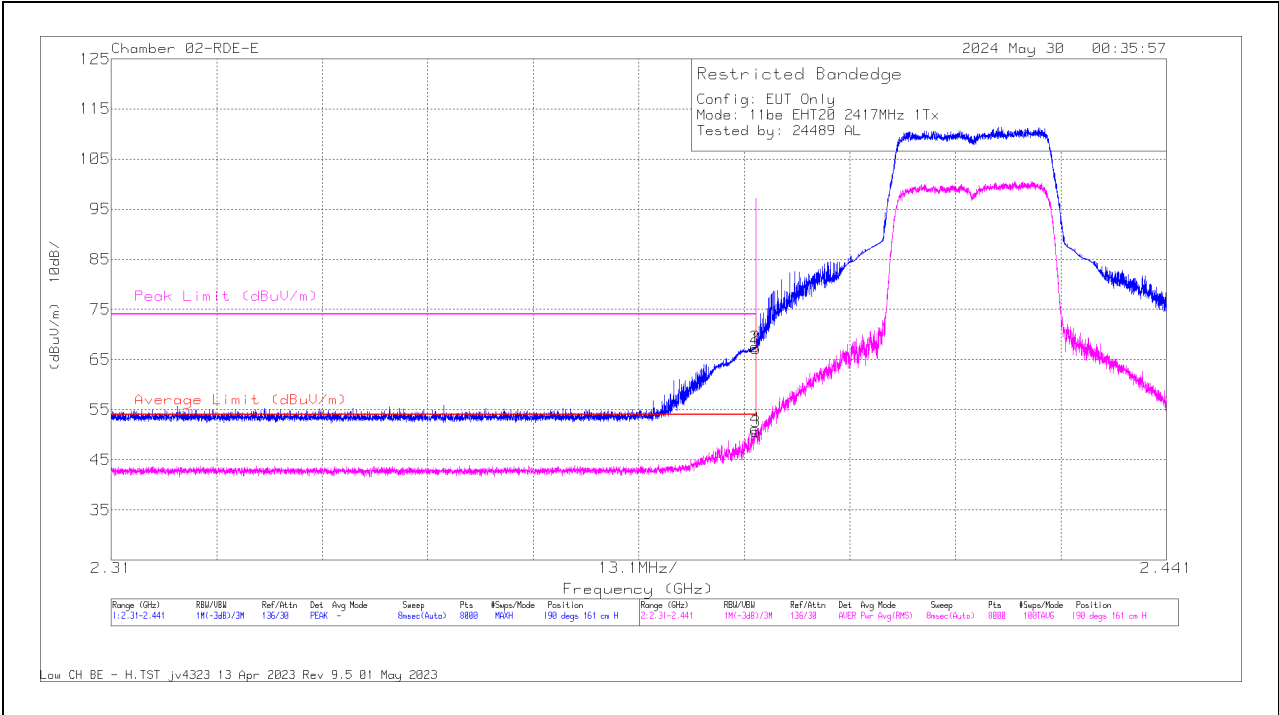

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	74.17	Pk	32.3	0	-39.27	67.2	-	-	74	-6.8	190	161	H
2	* 2.389969	74.46	Pk	32.3	0	-39.27	67.49	-	-	74	-6.51	190	161	H
3	* 2.39	57.09	RMS	32.3	.48	-39.27	50.6	54	-3.4	-	-	190	161	H
4	* 2.389953	57.62	RMS	32.3	.48	-39.27	51.13	54	-2.87	-	-	190	161	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

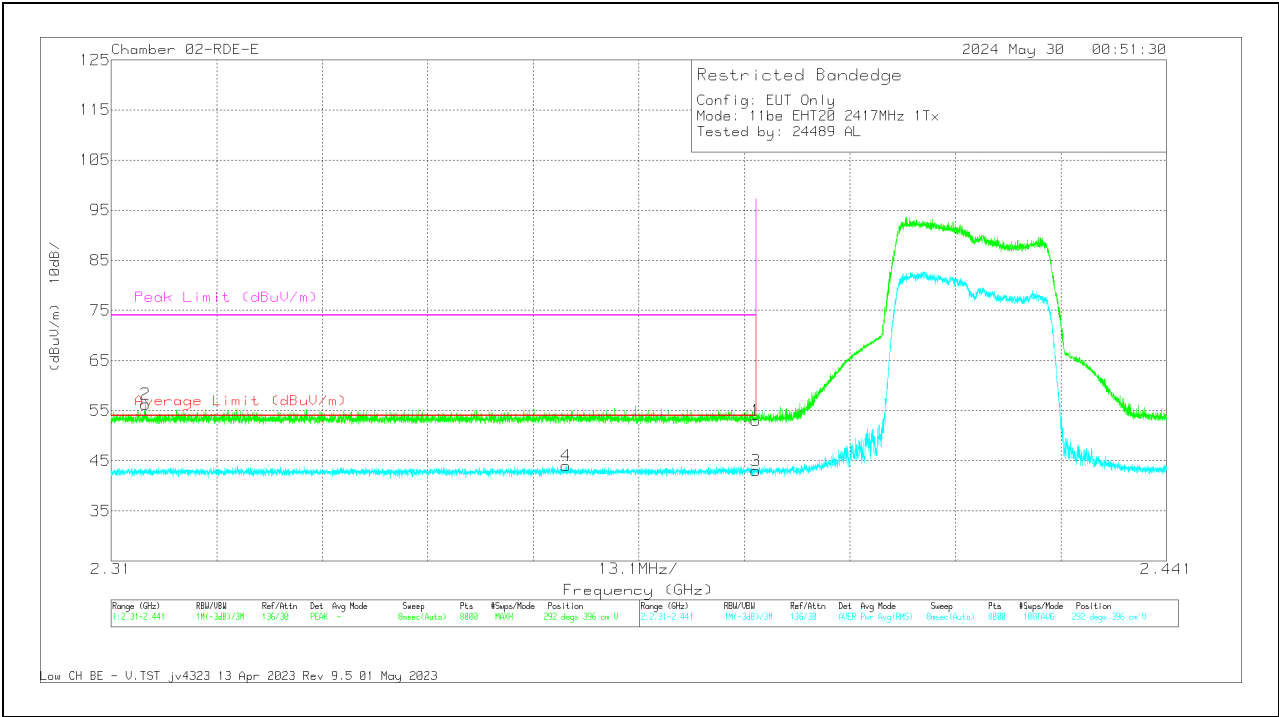


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.02	Pk	32.3	0	-39.27	53.05	-	-	74	-20.95	292	396	V
2	* 2.314242	63.55	Pk	32.1	0	-39.35	56.3	-	-	74	-17.7	292	396	V
3	* 2.39	49.53	RMS	32.3	.48	-39.27	43.04	54	-10.96	-	-	292	396	V
4	* 2.366452	50.61	RMS	32.2	.48	-39.31	43.98	54	-10.02	-	-	292	396	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

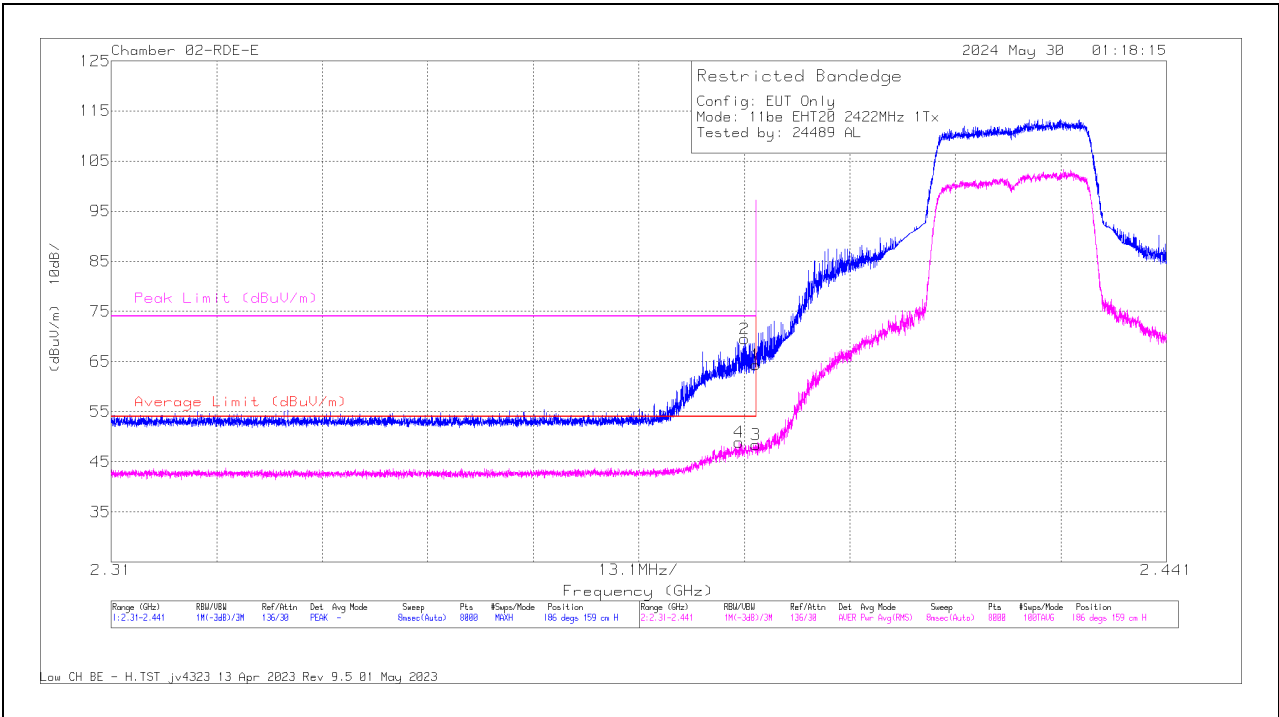

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	71.32	Pk	32.3	0	-39.27	64.35	-	-	74	-9.65	186	159	H
2	* 2.38861	76.48	Pk	32.3	0	-39.28	69.5	-	-	74	-4.5	186	159	H
3	* 2.39	54.9	RMS	32.3	.48	-39.27	48.41	54	-5.59	-	-	186	159	H
4	* 2.387971	55.44	RMS	32.3	.48	-39.28	48.94	54	-5.06	-	-	186	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

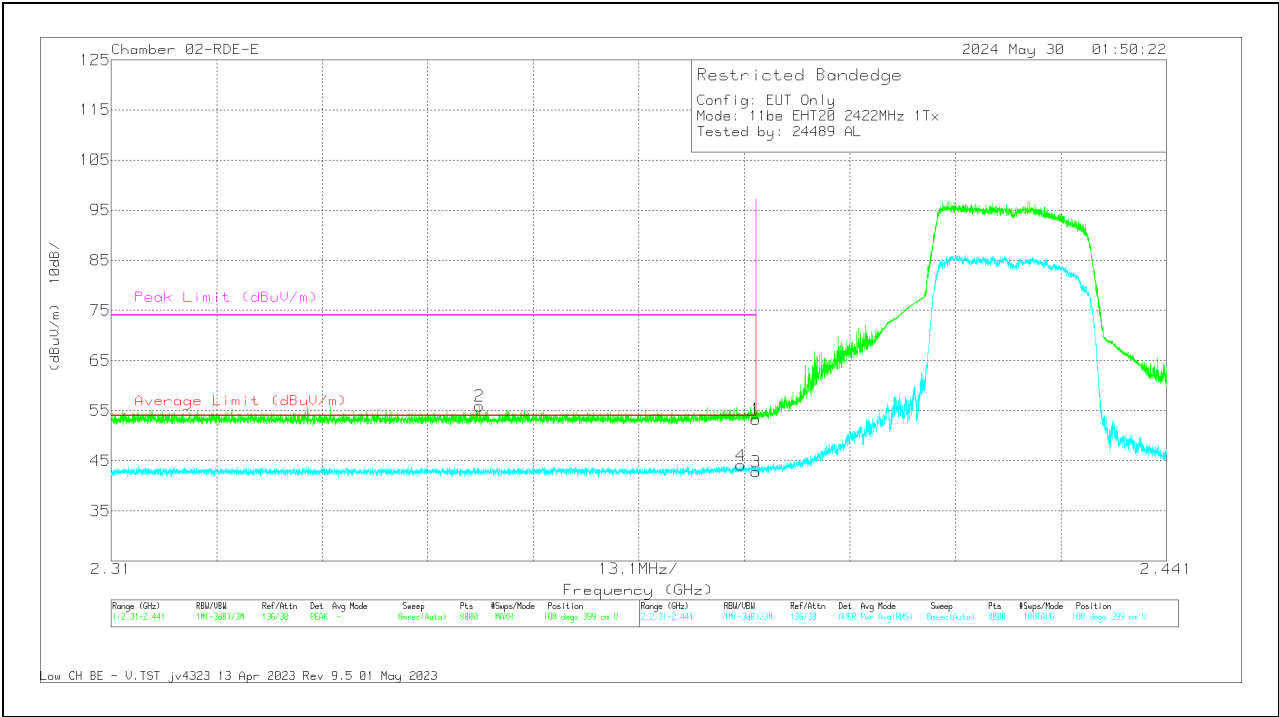


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.25	Pk	32.3	0	-39.27	53.28	-	-	74	-20.72	108	399	V
2	* 2.355692	63.16	Pk	32.1	0	-39.3	55.96	-	-	74	-18.04	108	399	V
3	* 2.39	49.31	RMS	32.3	.48	-39.27	42.82	54	-11.18	-	-	108	399	V
4	* 2.388167	50.58	RMS	32.3	.48	-39.28	44.08	54	-9.92	-	-	108	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

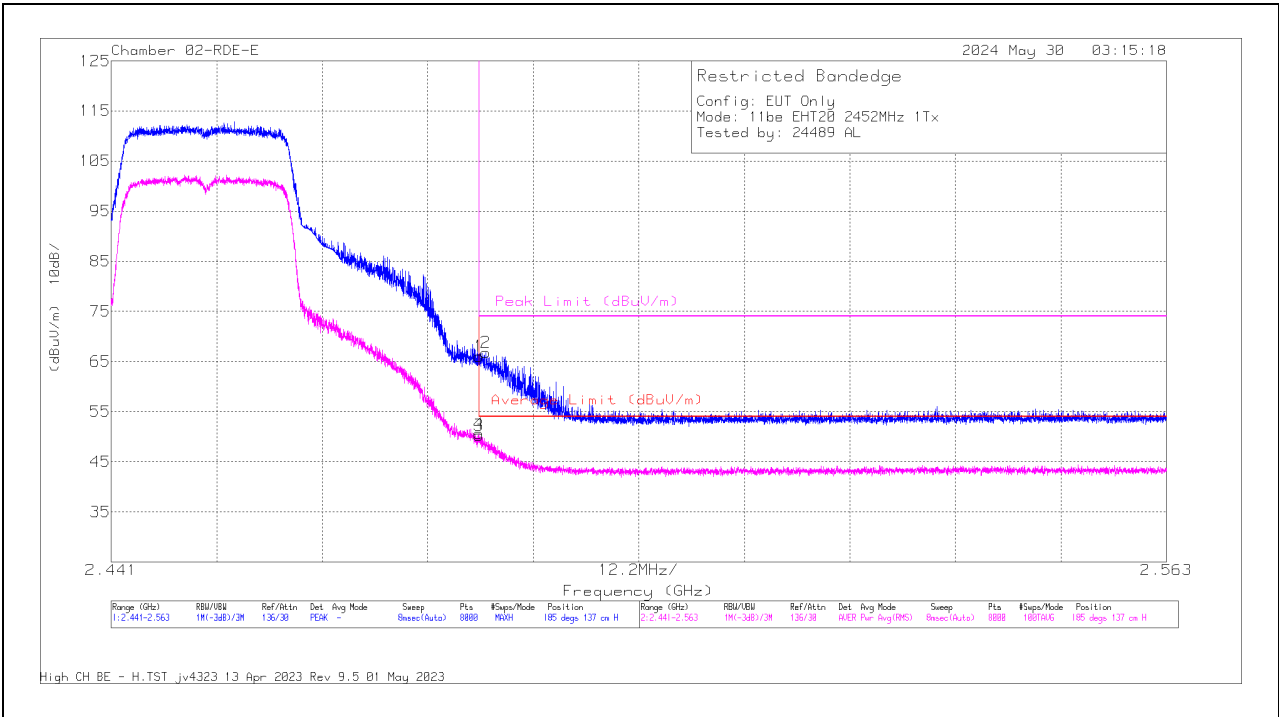

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	72.89	Pk	32.3	0	-39.16	66.03	-	-	74	-7.97	185	137	H
2	* 2.484316	73.63	Pk	32.3	0	-39.14	66.79	-	-	74	-7.21	185	137	H
3	* 2.4835	56.61	RMS	32.3	.48	-39.16	50.23	54	-3.77	-	-	185	137	H
4	* 2.483507	56.96	RMS	32.3	.48	-39.15	50.59	54	-3.41	-	-	185	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

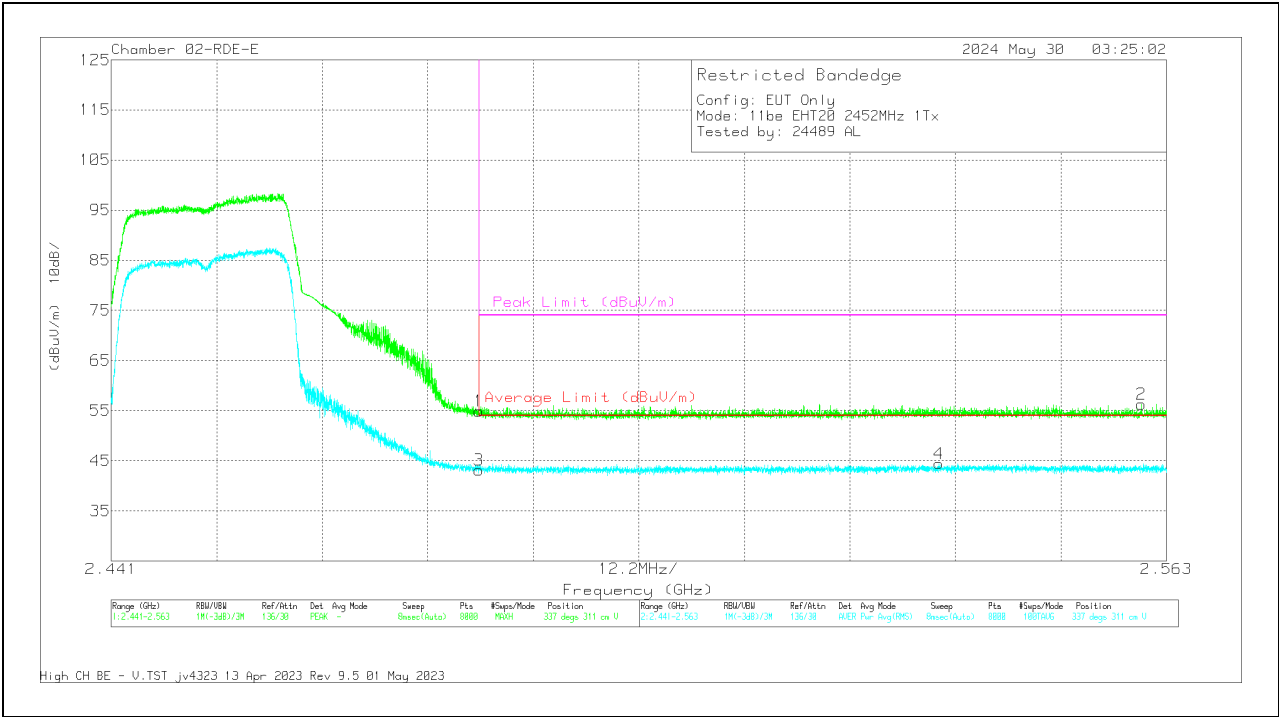


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.8	Pk	32.3	0	-39.16	54.94	-	-	74	-19.06	337	311	V
3	* 2.4835	49.57	RMS	32.3	.48	-39.16	43.19	54	-10.81	-	-	337	311	V
4	2.536661	50.53	RMS	32.5	.48	-39.06	44.45	54	-9.55	-	-	337	311	V
2	2.560088	62.93	Pk	32.4	0	-39.03	56.3	-	-	74	-17.7	337	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

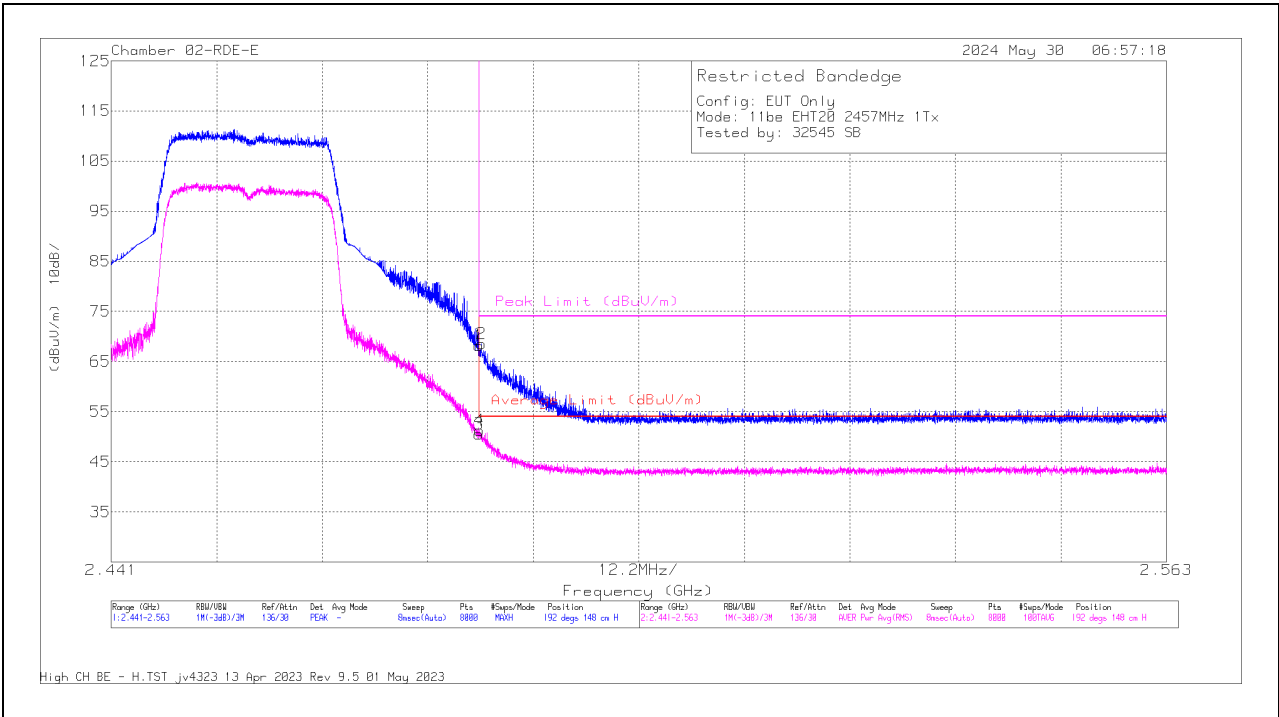

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.03	Pk	32.3	0	-39.16	68.17	-	-	74	-5.83	192	148	H
2	* 2.483782	75.41	Pk	32.3	0	-39.15	68.56	-	-	74	-5.44	192	148	H
3	* 2.4835	56.86	RMS	32.3	.48	-39.16	50.48	54	-3.52	-	-	192	148	H
4	* 2.483614	57.64	RMS	32.3	.48	-39.15	51.27	54	-2.73	-	-	192	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

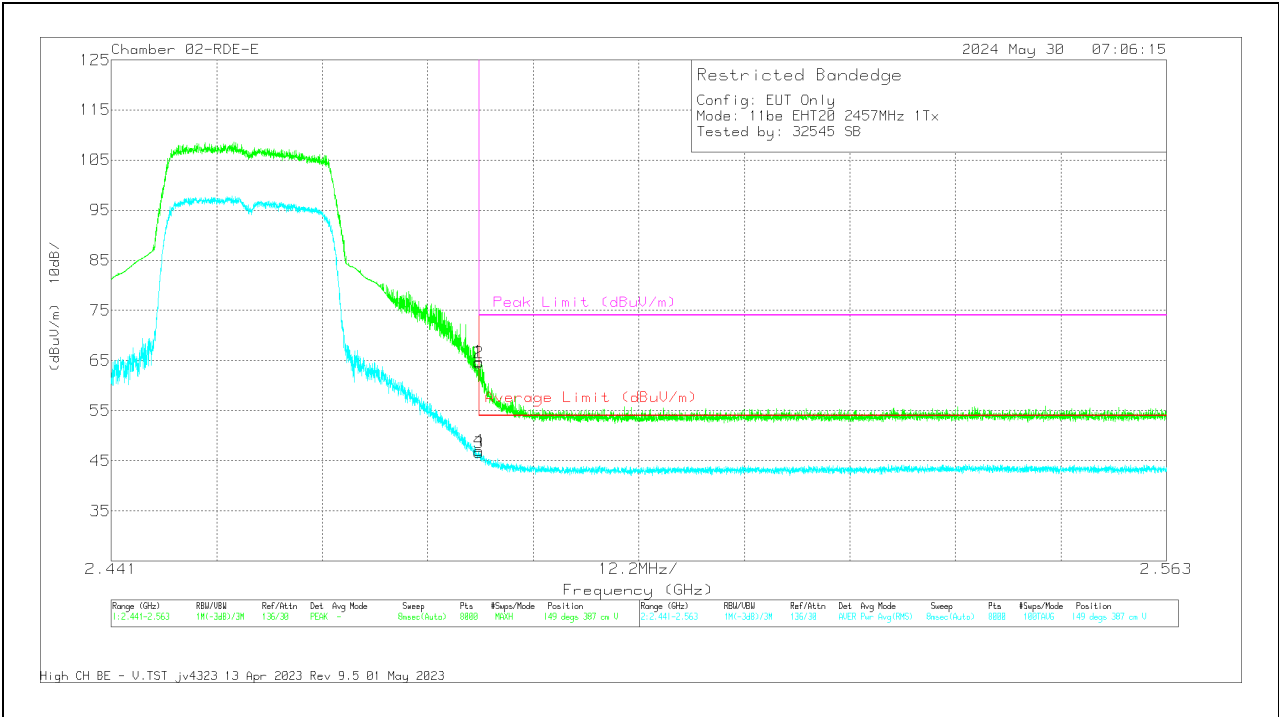


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.63	Pk	32.3	0	-39.16	64.77	-	-	74	-9.23	149	387	V
2	* 2.483507	71.44	Pk	32.3	0	-39.15	64.59	-	-	74	-9.41	149	387	V
3	* 2.4835	52.97	RMS	32.3	.48	-39.16	46.59	54	-7.41	-	-	149	387	V
4	* 2.483523	53.41	RMS	32.3	.48	-39.15	47.04	54	-6.96	-	-	149	387	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

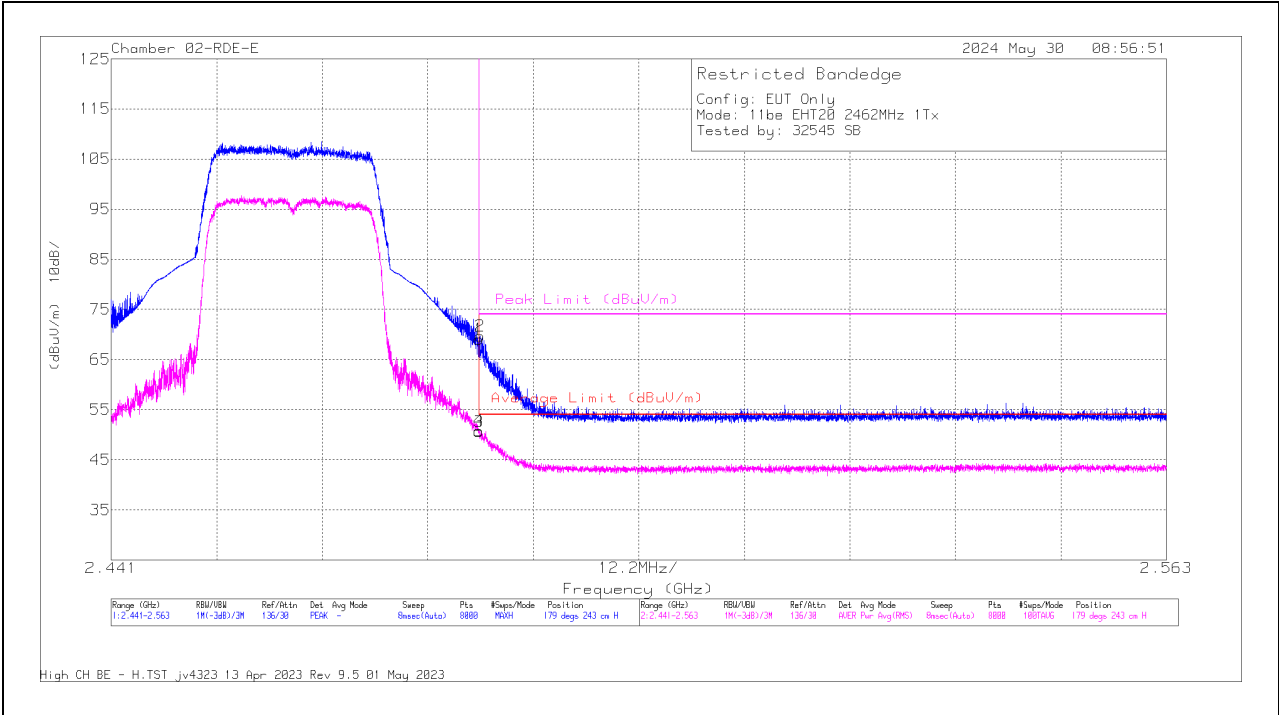

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.9	Pk	32.3	0	-39.16	69.04	-	-	74	-4.96	179	243	H
2	* 2.483645	76.48	Pk	32.3	0	-39.15	69.63	-	-	74	-4.37	179	243	H
3	* 2.4835	56.98	RMS	32.3	.48	-39.16	50.6	54	-3.4	-	-	179	243	H
4	* 2.483538	57.18	RMS	32.3	.48	-39.15	50.81	54	-3.19	-	-	179	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

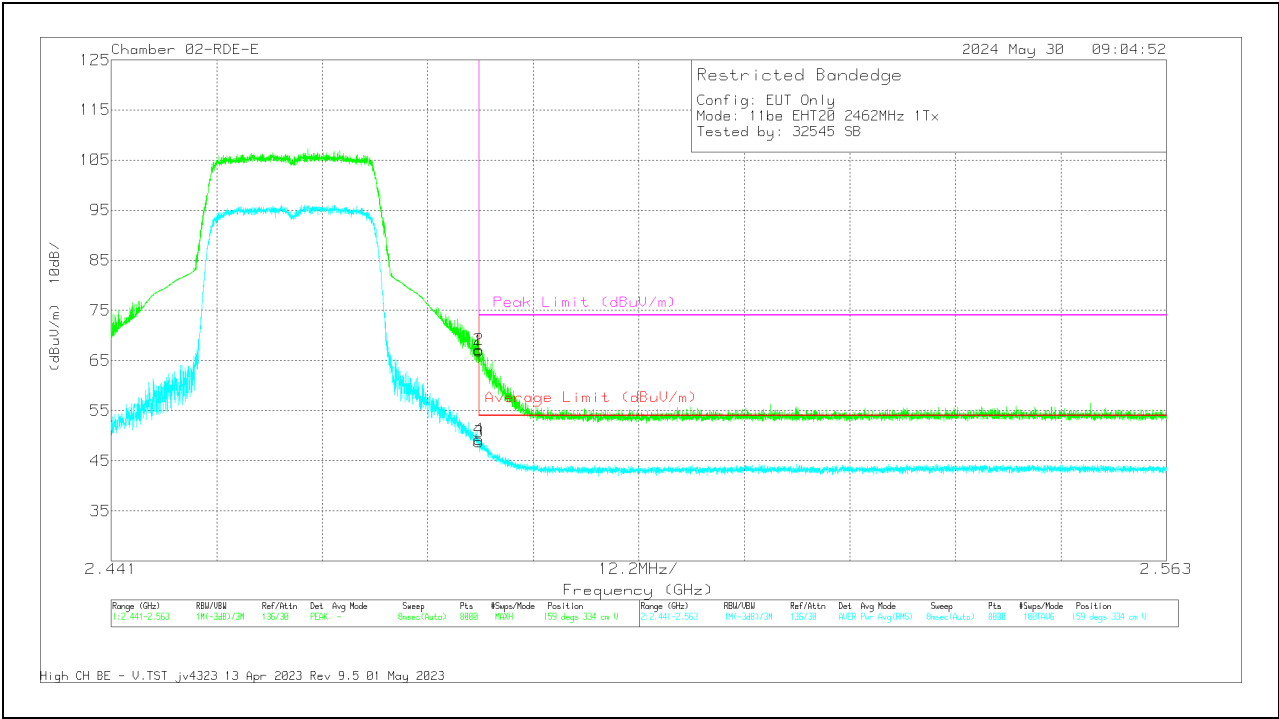


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.81	Pk	32.3	0	-39.16	66.95	-	-	74	-7.05	159	334	V
2	* 2.483538	73.98	Pk	32.3	0	-39.15	67.13	-	-	74	-6.87	159	334	V
3	* 2.4835	55.11	RMS	32.3	.48	-39.16	48.73	54	-5.27	-	-	159	334	V
4	* 2.483538	55.66	RMS	32.3	.48	-39.15	49.29	54	-4.71	-	-	159	334	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

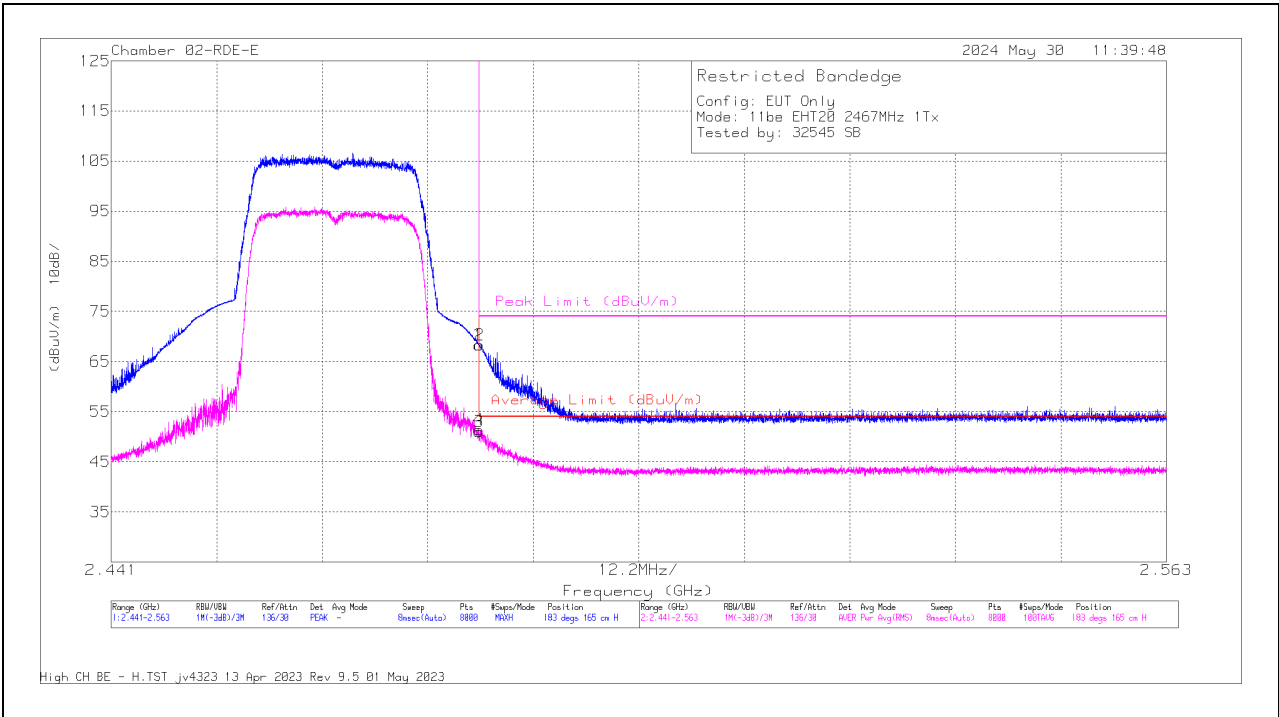

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.19	Pk	32.3	0	-39.16	68.33	-	-	74	-5.67	183	165	H
2	* 2.483584	75.19	PK	32.3	0	-39.15	68.34	-	-	74	-5.66	183	165	H
3	* 2.4835	57.36	RMS	32.3	.48	-39.16	50.98	54	-3.02	-	-	183	165	H
4	* 2.483507	57.82	RMS	32.3	.48	-39.15	51.45	54	-2.55	-	-	183	165	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

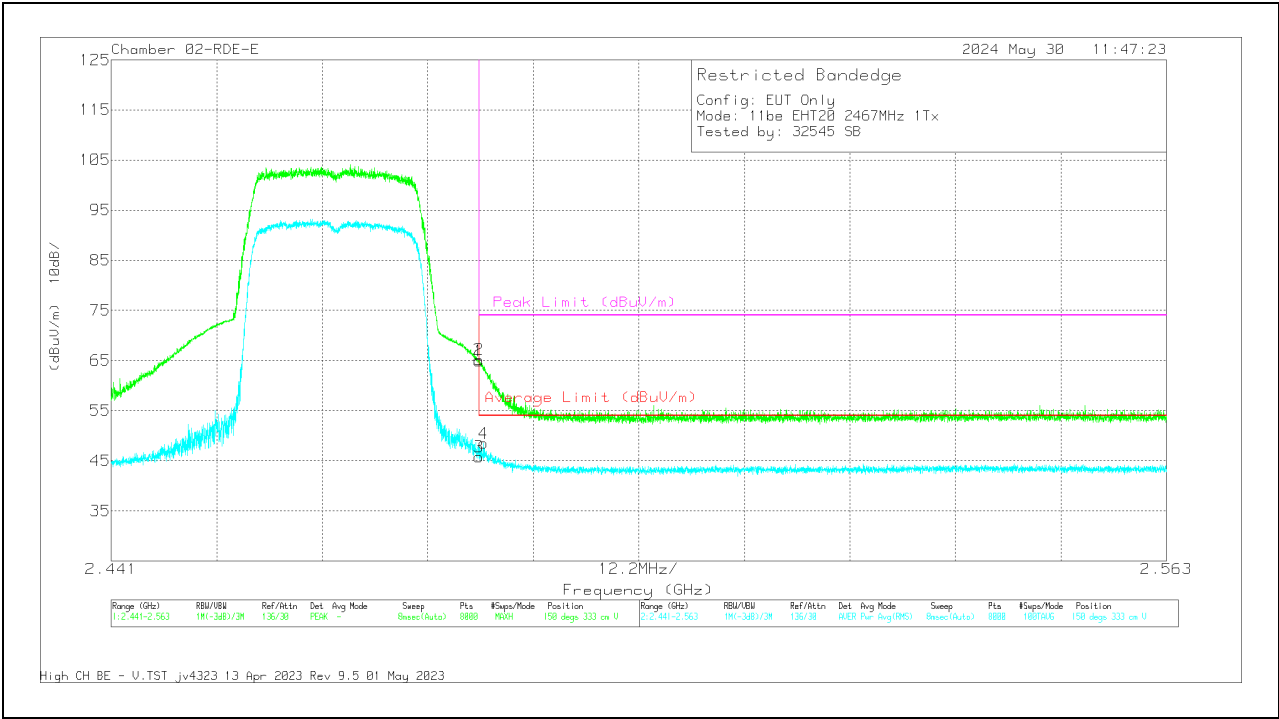


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.74	Pk	32.3	0	-39.16	64.88	-	-	74	-9.12	150	333	V
2	* 2.483523	72.04	Pk	32.3	0	-39.15	65.19	-	-	74	-8.81	150	333	V
3	* 2.4835	52.11	RMS	32.3	.48	-39.16	45.73	54	-8.27	-	-	150	333	V
4	* 2.484056	54.83	RMS	32.3	.48	-39.15	48.46	54	-5.54	-	-	150	333	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

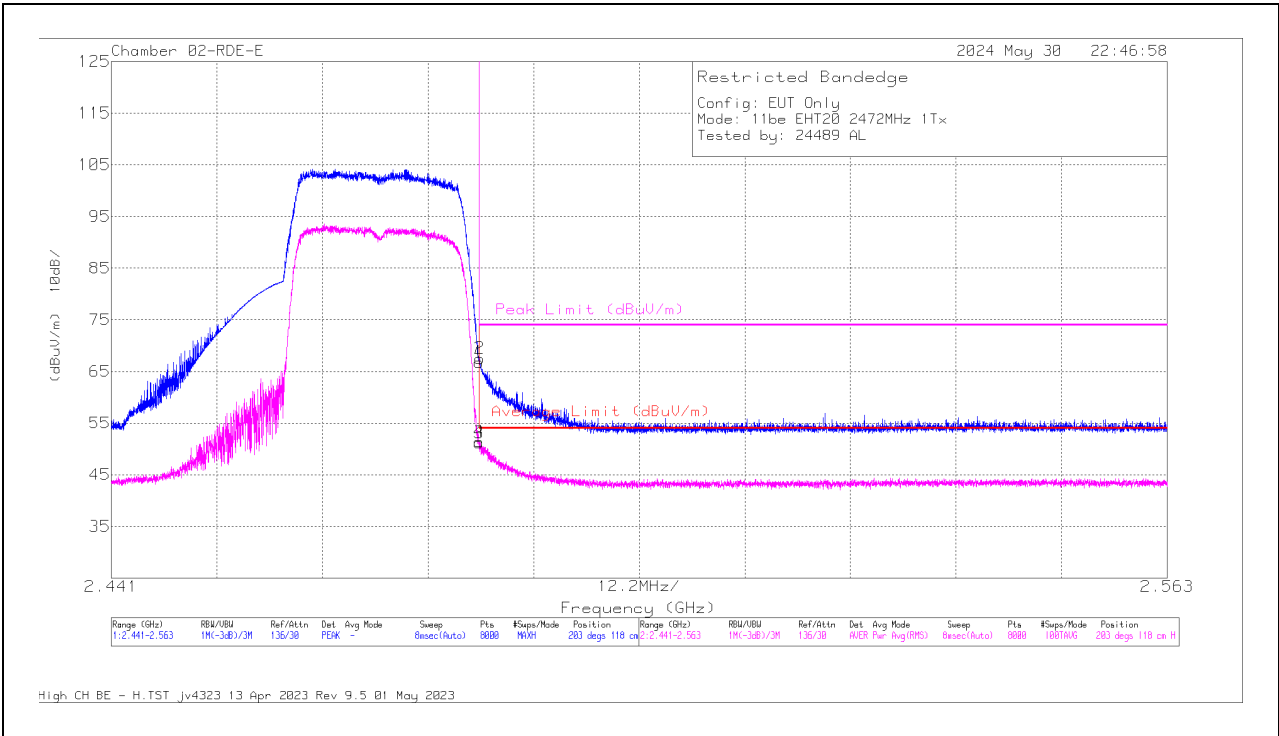

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.64	Pk	32.3	0	-39.16	66.78	-	-	74	-7.22	203	118	H
2	* 2.483584	74.39	Pk	32.3	0	-39.15	67.54	-	-	74	-6.46	203	118	H
3	* 2.4835	57.57	RMS	32.3	.48	-39.16	51.19	54	-2.81	-	-	203	118	H
4	* 2.483507	57.78	RMS	32.3	.48	-39.15	51.41	54	-2.59	-	-	203	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

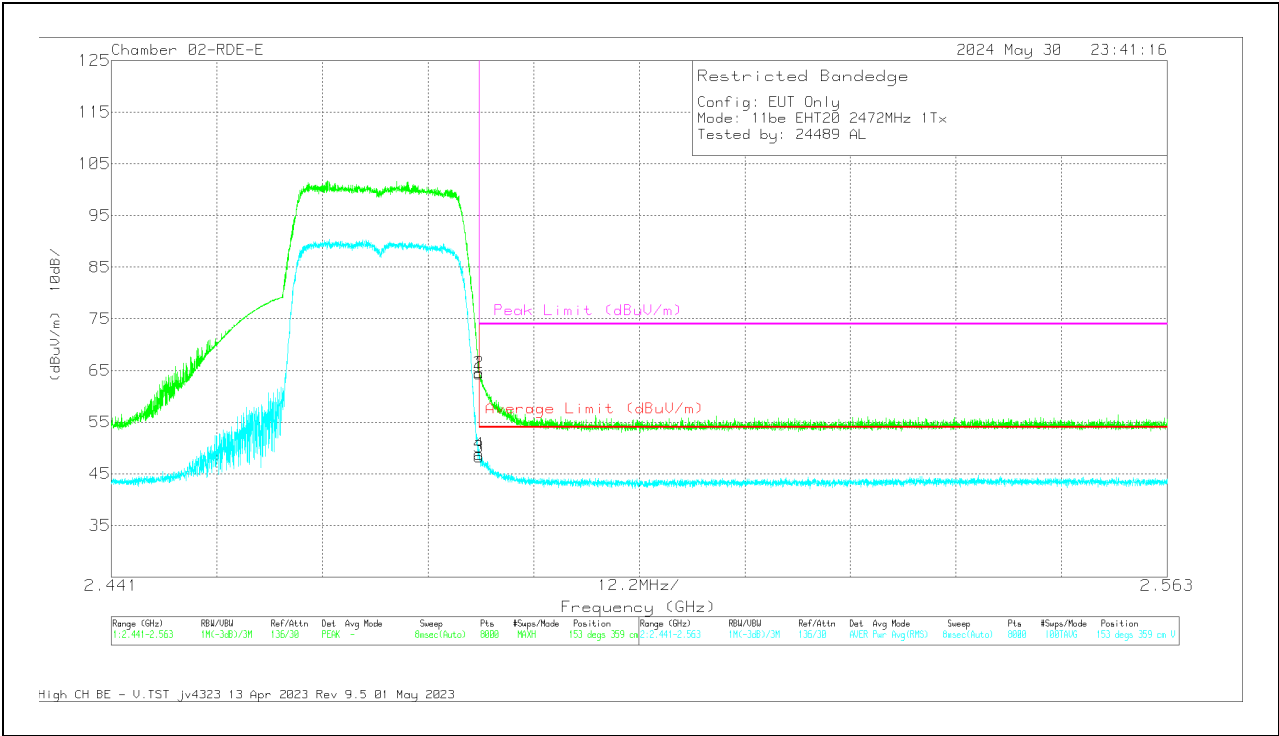


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.23	Pk	32.3	0	-39.16	64.37	-	-	74	-9.63	153	359	V
2	* 2.483523	71.4	Pk	32.3	0	-39.15	64.55	-	-	74	-9.45	153	359	V
3	* 2.4835	54.6	RMS	32.3	.48	-39.16	48.22	54	-5.78	-	-	153	359	V
4	* 2.483523	55.18	RMS	32.3	.48	-39.15	48.81	54	-5.19	-	-	153	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

ANT 4 : 26 Tone, RU Index 0

BAND-EDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

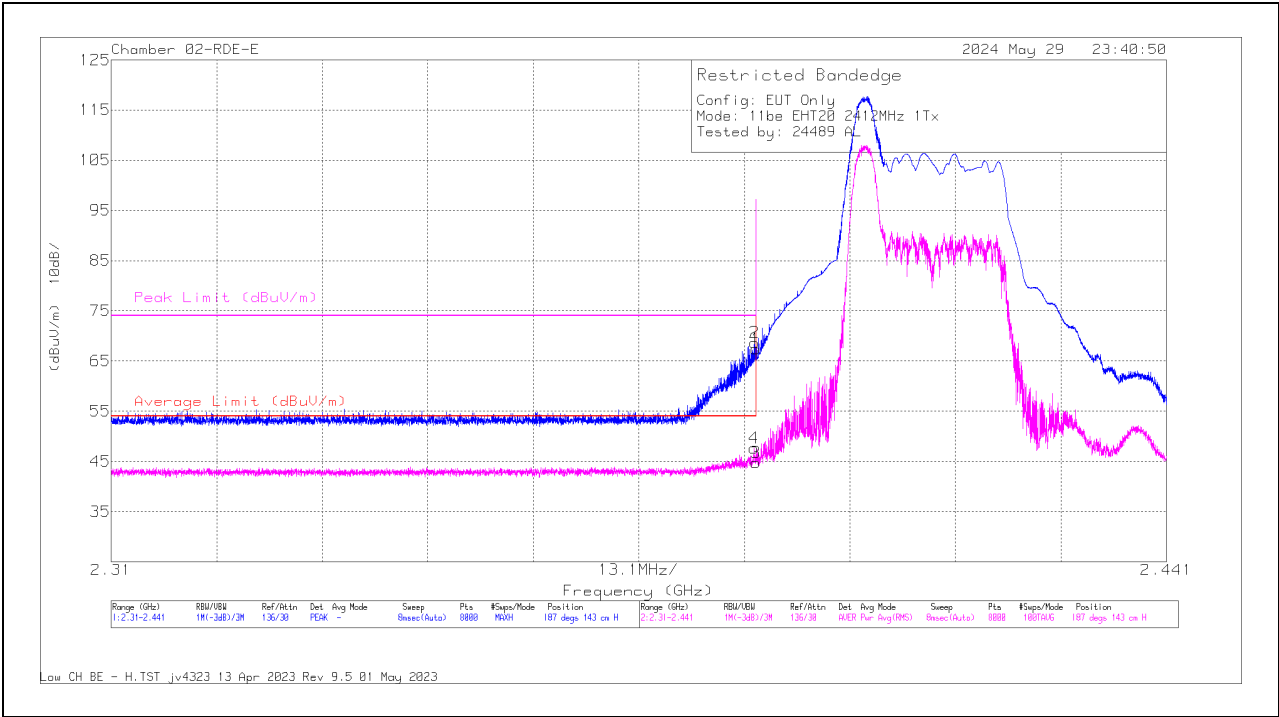

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	74.37	Pk	32.3	0	-39.27	67.4	-	-	74	-6.6	187	143	H
2	* 2.389854	75.63	Pk	32.3	0	-39.27	68.66	-	-	74	-5.34	187	143	H
3	* 2.39	51.2	RMS	32.3	.58	-39.27	44.81	54	-9.19	-	-	187	143	H
4	* 2.389805	54.06	RMS	32.3	.58	-39.27	47.67	54	-6.33	-	-	187	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

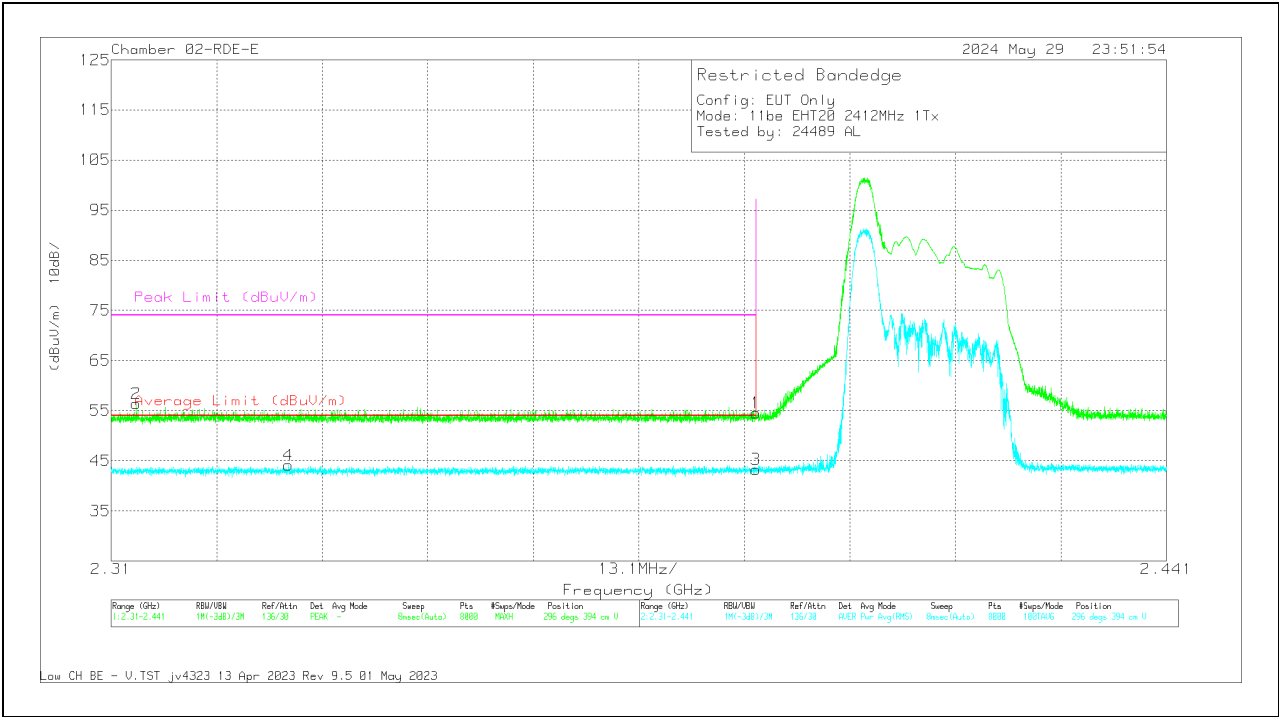


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.46	Pk	32.3	0	-39.27	54.49	-	-	74	-19.51	296	394	V
2	* 2.313112	63.61	Pk	32.1	0	-39.35	56.36	-	-	74	-17.64	296	394	V
3	* 2.39	49.69	RMS	32.3	.58	-39.27	43.3	54	-10.7	-	-	296	394	V
4	* 2.332027	50.7	RMS	32.1	.58	-39.29	44.09	54	-9.91	-	-	296	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

ANT 4 : 26-Tone, RU Index 8

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

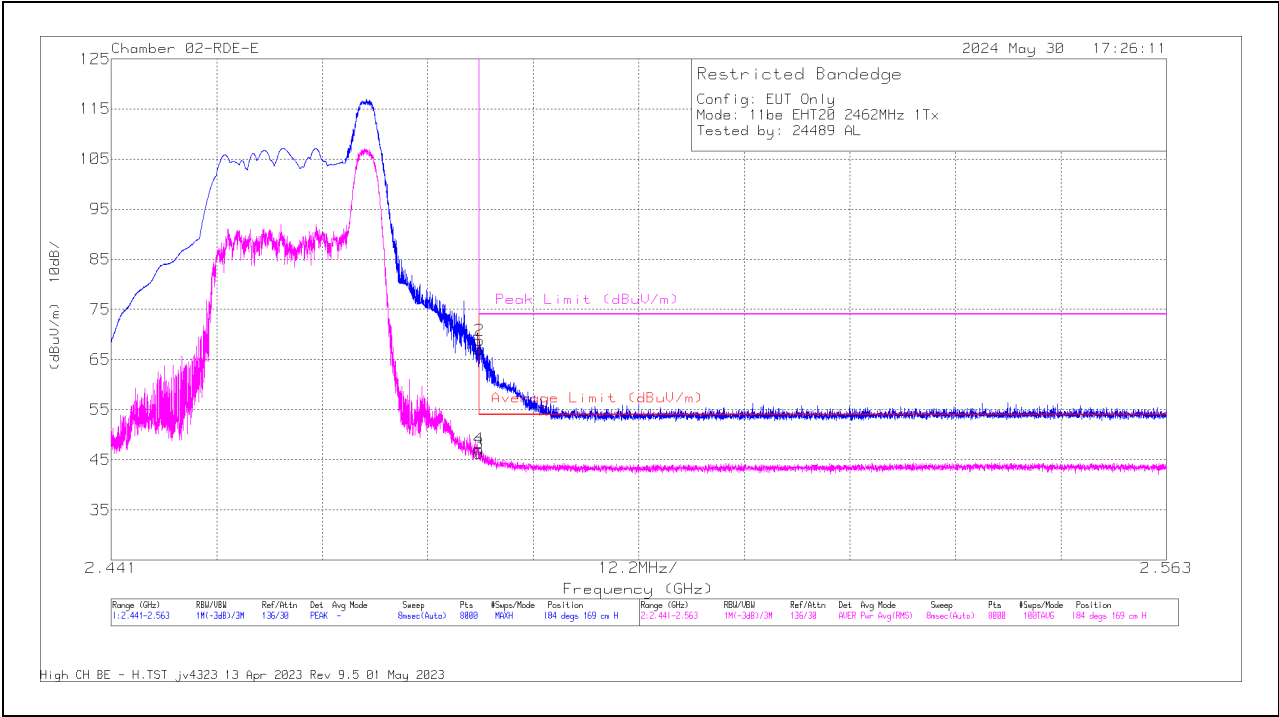

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.87	Pk	32.3	0	-39.16	67.01	-	-	74	-6.99	184	169	H
2	* 2.483584	75.67	Pk	32.3	0	-39.15	68.82	-	-	74	-5.18	184	169	H
3	* 2.4835	52.54	RMS	32.3	.58	-39.16	46.26	54	-7.74	-	-	184	169	H
4	* 2.483523	53.4	RMS	32.3	.58	-39.15	47.13	54	-6.87	-	-	184	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

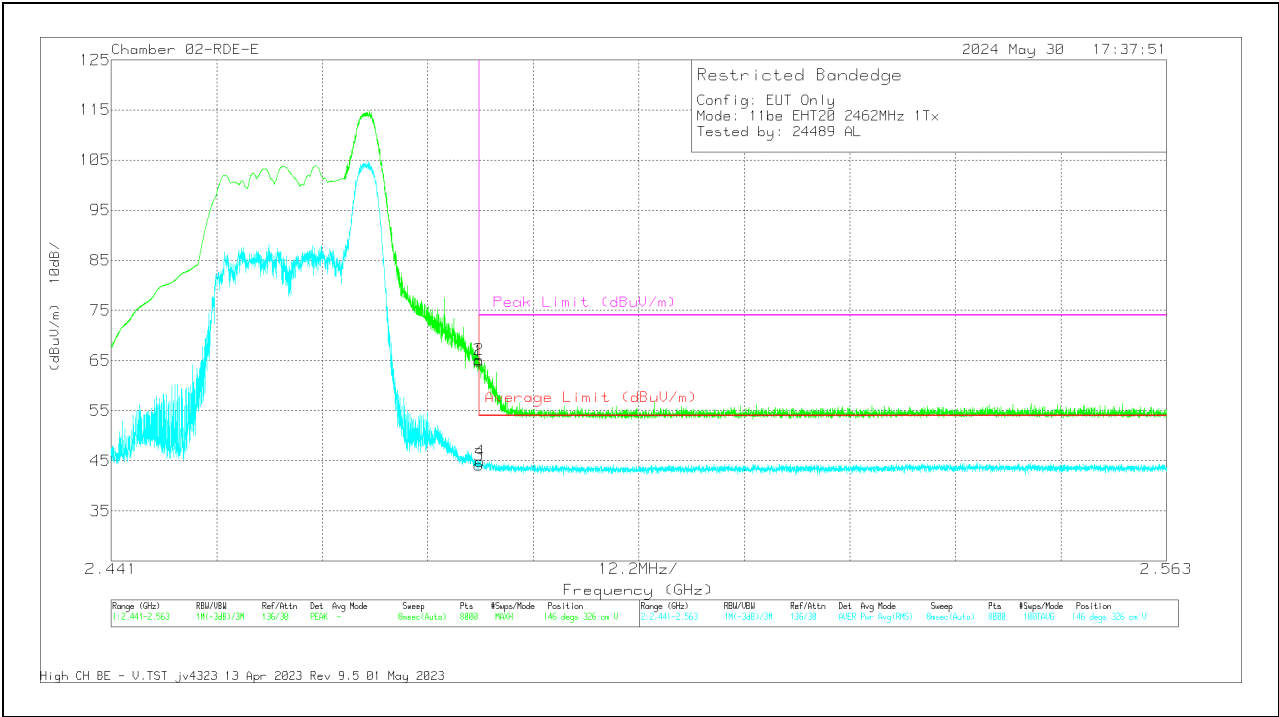


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.75	Pk	32.3	0	-39.16	64.89	-	-	74	-9.11	146	326	V
2	* 2.483507	72.02	Pk	32.3	0	-39.15	65.17	-	-	74	-8.83	146	326	V
3	* 2.4835	50.46	RMS	32.3	.58	-39.16	44.18	54	-9.82	-	-	146	326	V
4	* 2.48366	51.19	RMS	32.3	.58	-39.15	44.92	54	-9.08	-	-	146	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

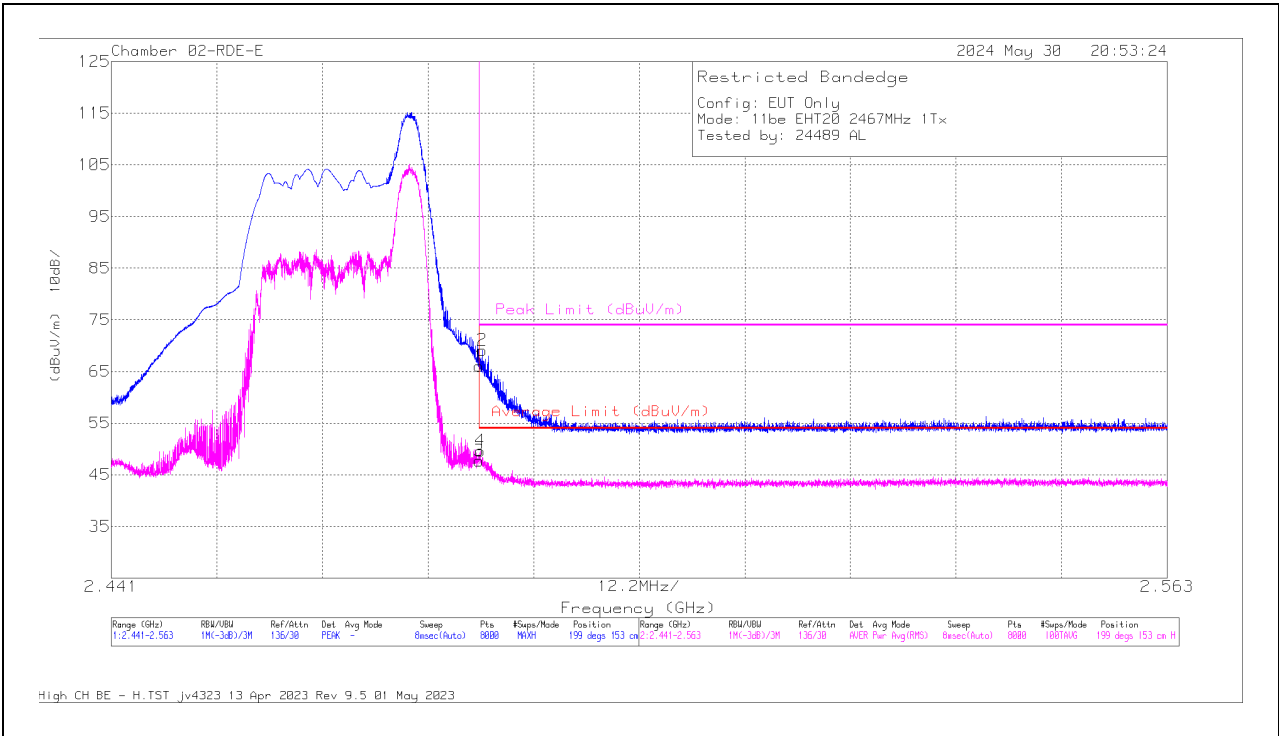

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	72.93	Pk	32.3	0	-39.16	66.07	-	-	74	-7.93	199	153	H
2	* 2.483843	75.97	Pk	32.3	0	-39.15	69.12	-	-	74	-4.88	199	153	H
3	* 2.4835	54	RMS	32.3	.58	-39.16	47.72	54	-6.28	-	-	199	153	H
4	* 2.48366	55.9	RMS	32.3	.58	-39.15	49.63	54	-4.37	-	-	199	153	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

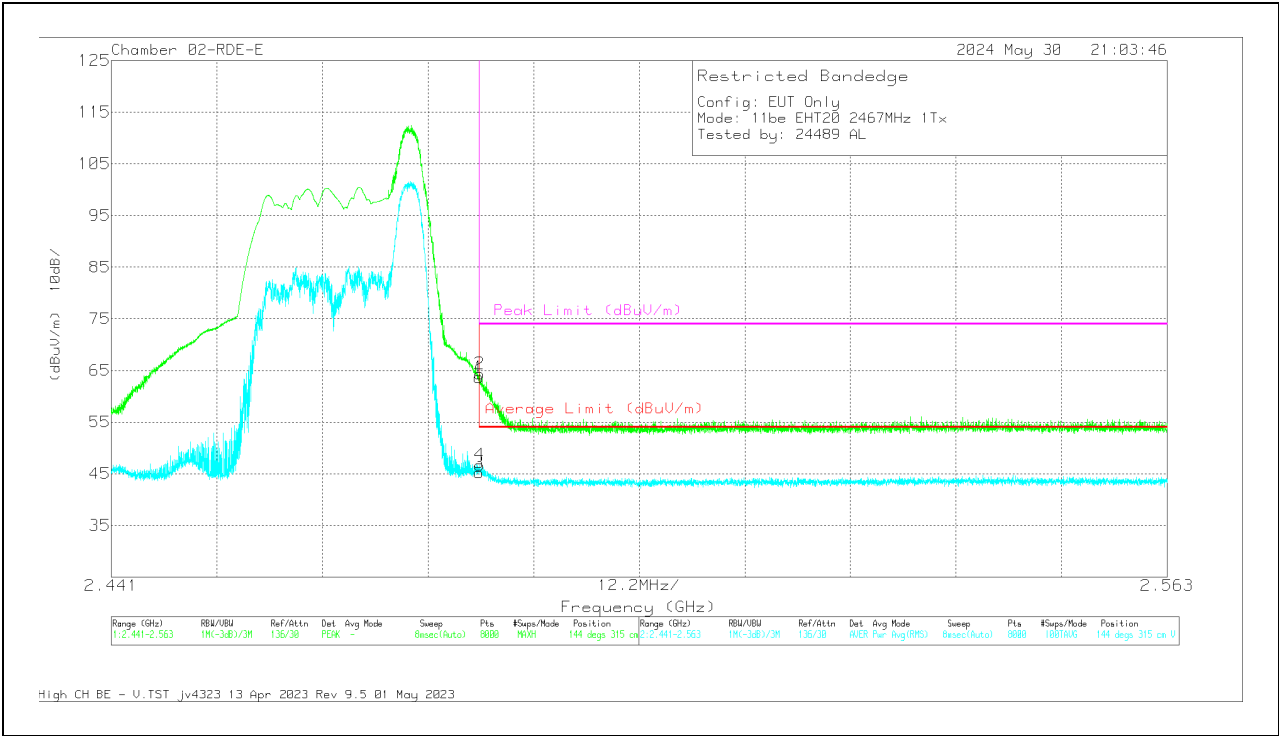


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	70.54	Pk	32.3	0	-39.16	63.68	-	-	74	-10.32	144	315	V
2	* 2.483568	71.2	Pk	32.3	0	-39.15	64.35	-	-	74	-9.65	144	315	V
3	* 2.4835	51.5	RMS	32.3	.58	-39.16	45.22	54	-8.78	-	-	144	315	V
4	* 2.483553	52.98	RMS	32.3	.58	-39.15	46.71	54	-7.29	-	-	144	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

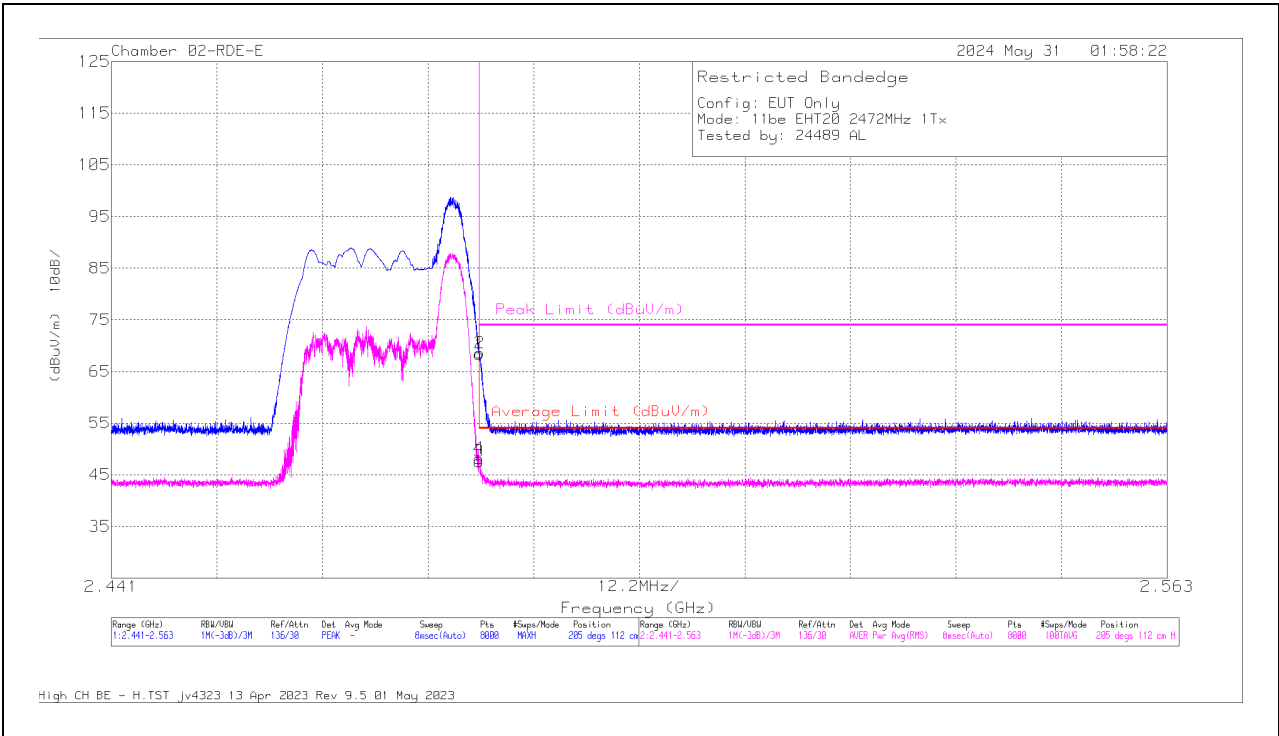

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.18	Pk	32.3	0	-39.16	68.32	-	-	74	-5.68	205	112	H
2	* 2.483568	75.42	Pk	32.3	0	-39.15	68.57	-	-	74	-5.43	205	112	H
3	* 2.4835	53.87	RMS	32.3	.58	-39.16	47.59	54	-6.41	-	-	205	112	H
4	* 2.483507	54.42	RMS	32.3	.58	-39.15	48.15	54	-5.85	-	-	205	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

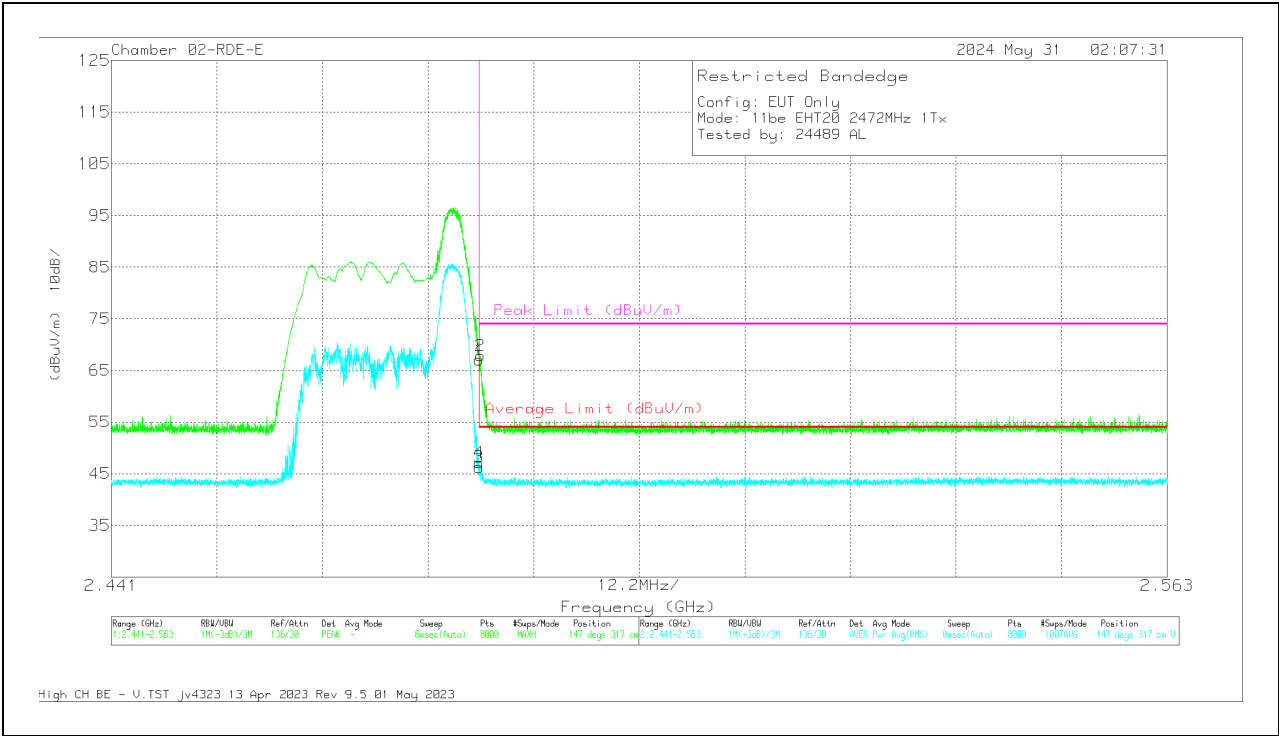


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.95	Pk	32.3	0	-39.16	67.09	-	-	74	-6.91	147	317	V
2	* 2.483645	74.7	Pk	32.3	0	-39.15	67.85	-	-	74	-6.15	147	317	V
3	* 2.4835	52.53	RMS	32.3	.58	-39.16	46.25	54	-7.75	-	-	147	317	V
4	* 2.483523	53.4	RMS	32.3	.58	-39.15	47.13	54	-6.87	-	-	147	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

ANT 3 : SU Mode

BAND-EDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

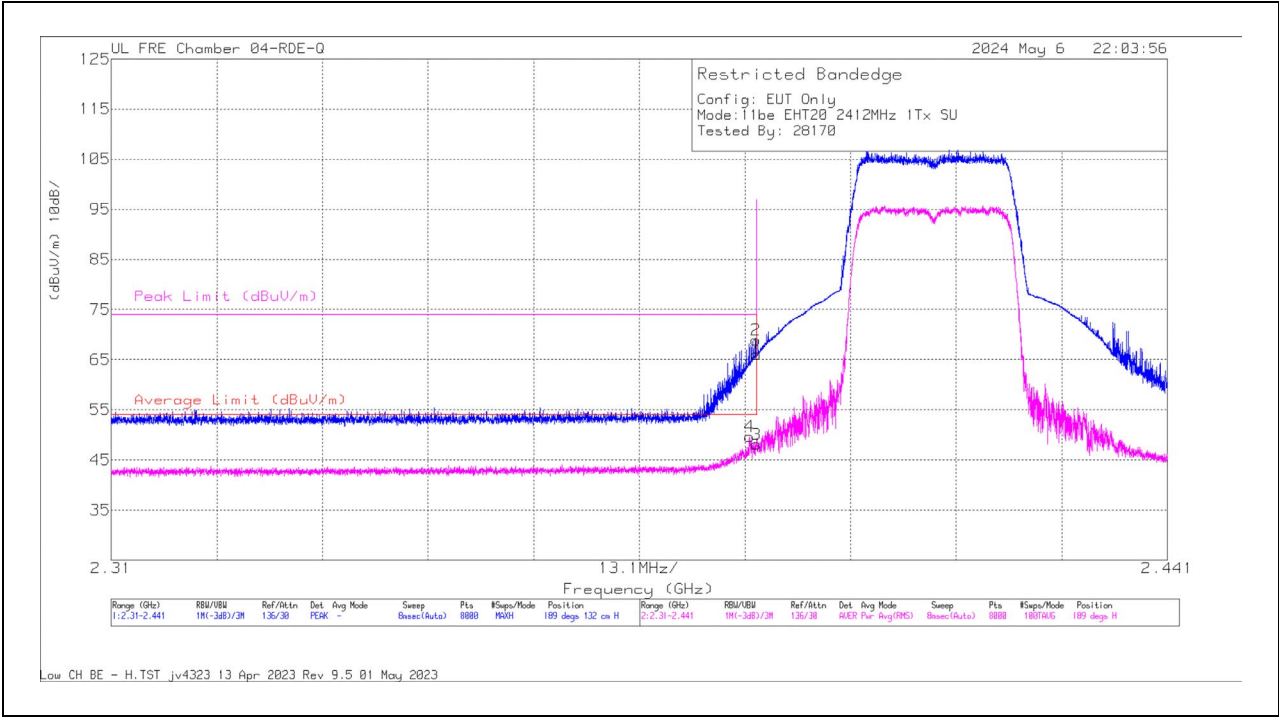

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.389166	55.97	RMS	31.7	.48	-38.51	49.64	54	-4.36	-	-	189	132	H
2	* 2.389969	75.71	Pk	31.7	0	-38.51	68.9	-	-	74	-5.1	189	132	H
1	* 2.39	72.85	Pk	31.7	0	-38.51	66.04	-	-	74	-7.96	189	132	H
3	* 2.39	54.42	RMS	31.7	.48	-38.51	48.09	54	-5.91	-	-	189	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

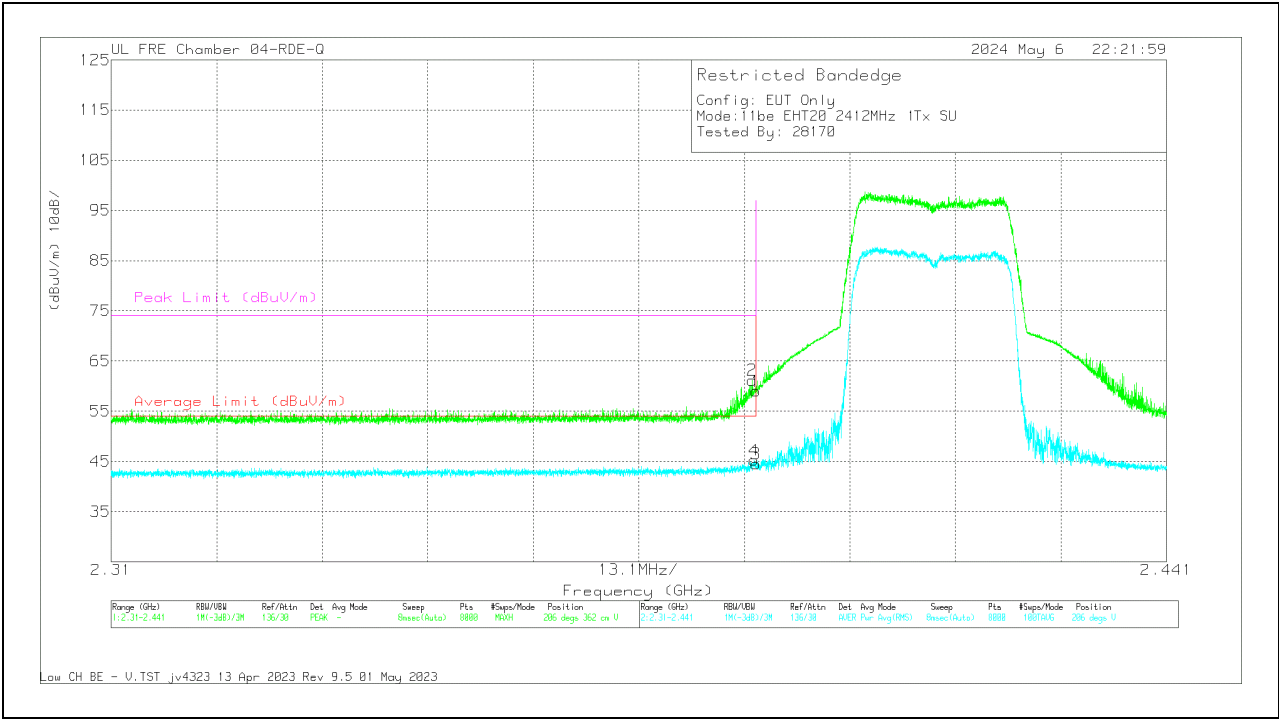


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389576	67.97	Pk	31.7	0	-38.51	61.16	-	-	74	-12.84	206	362	V
4	* 2.389822	51.54	RMS	31.7	.48	-38.51	45.21	54	-8.79	-	-	206	362	V
1	* 2.39	65.79	Pk	31.7	0	-38.51	58.98	-	-	74	-15.02	206	362	V
3	* 2.39	50.87	RMS	31.7	.48	-38.51	44.54	54	-9.46	-	-	206	362	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

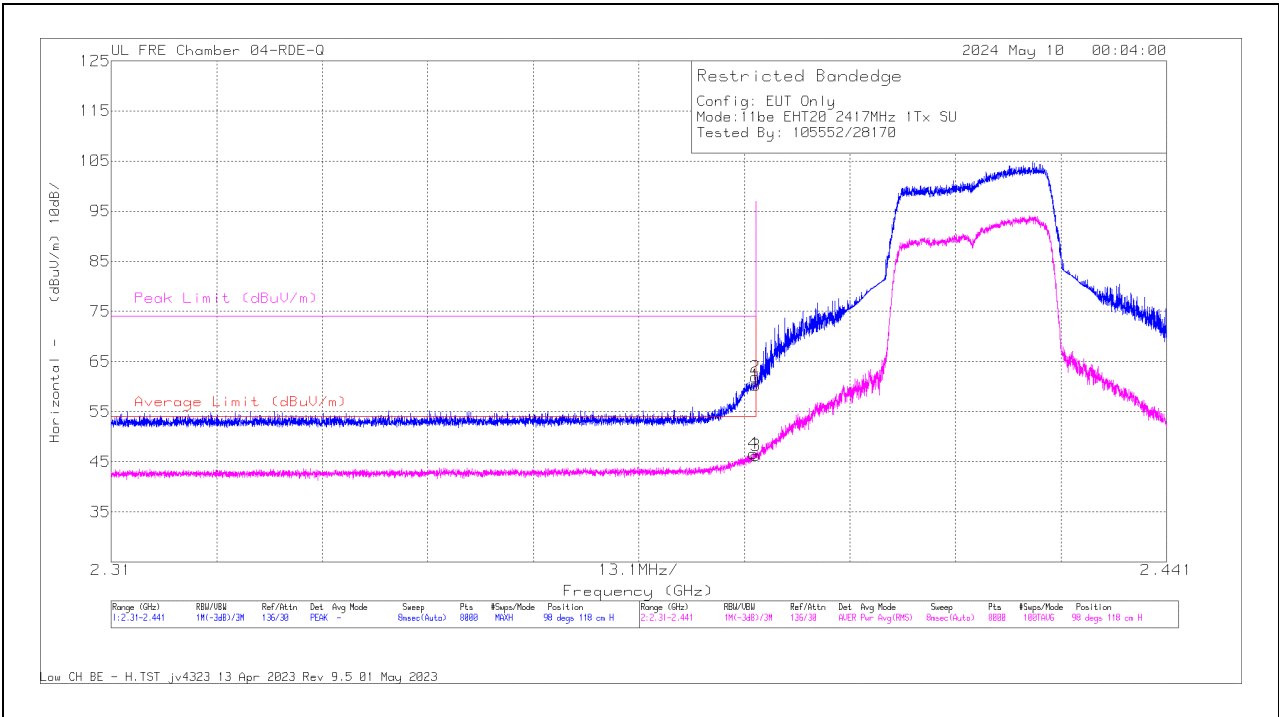

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.389756	53.02	RMS	31.7	.48	-38.51	46.69	54	-7.31	-	-	98	118	H
2	* 2.389953	68.71	Pk	31.7	0	-38.51	61.9	-	-	74	-12.1	98	118	H
1	* 2.39	67.12	Pk	31.7	0	-38.51	60.31	-	-	74	-13.69	98	118	H
3	* 2.39	52.62	RMS	31.7	.48	-38.51	46.29	54	-7.71	-	-	98	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

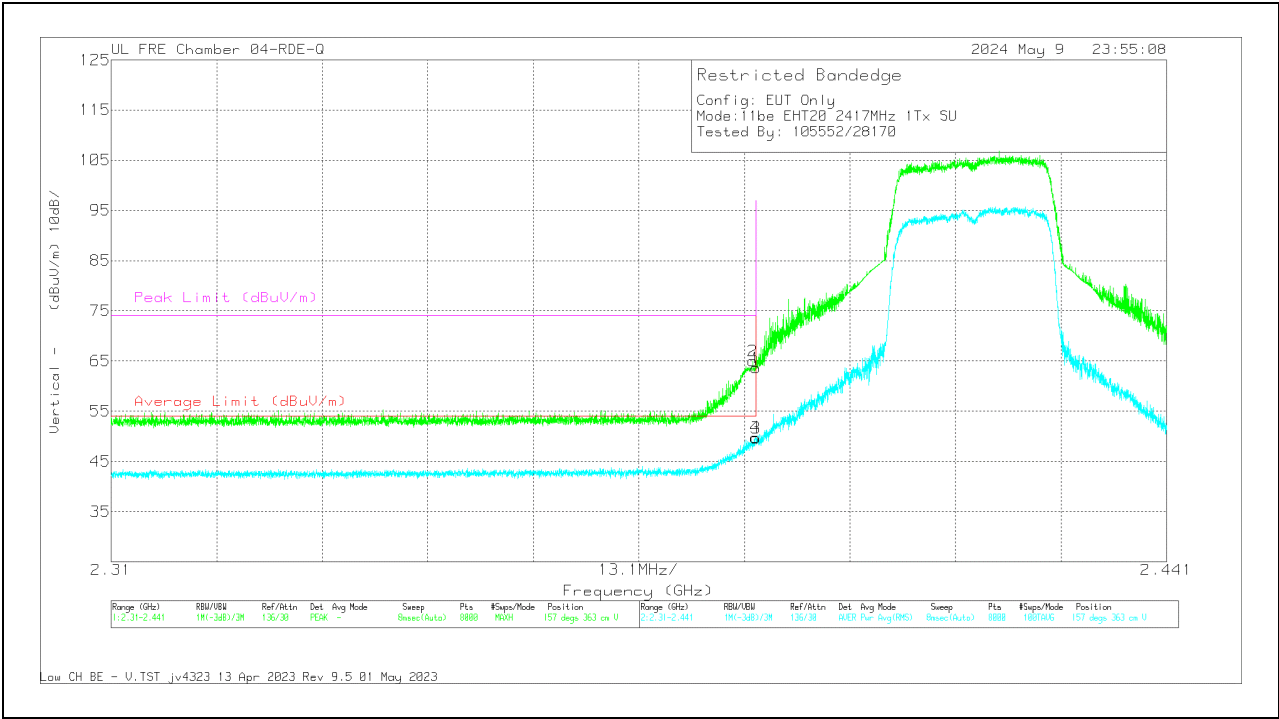


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389658	71.8	Pk	31.7	0	-38.51	64.99	-	-	74	-9.01	157	363	V
4	* 2.389953	56.11	RMS	31.7	.48	-38.51	49.78	54	-4.22	-	-	157	363	V
1	* 2.39	70.43	Pk	31.7	0	-38.51	63.62	-	-	74	-10.38	157	363	V
3	* 2.39	55.96	RMS	31.7	.48	-38.51	49.63	54	-4.37	-	-	157	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

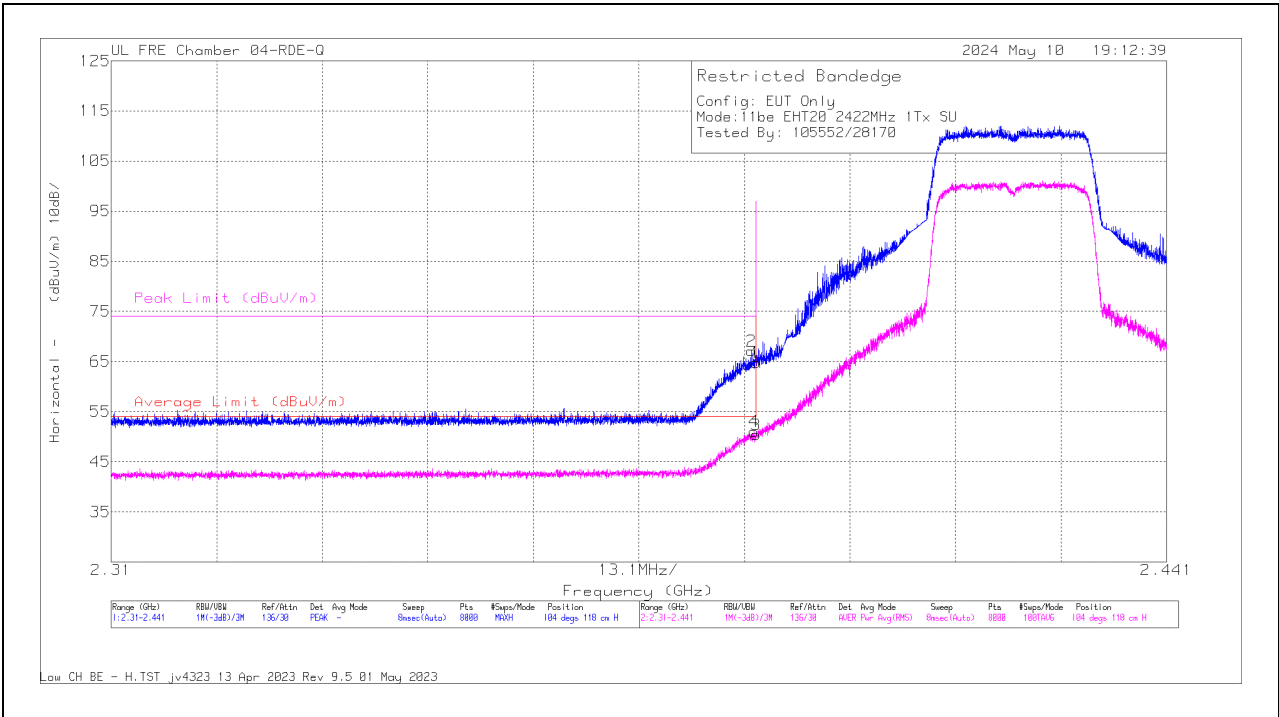

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389478	73.92	Pk	31.7	0	-38.51	67.11	-	-	74	-6.89	104	118	H
4	* 2.389822	57.37	RMS	31.7	.48	-38.51	51.04	54	-2.96	-	-	104	118	H
1	* 2.39	71.59	Pk	31.7	0	-38.51	64.78	-	-	74	-9.22	104	118	H
3	* 2.39	56.68	RMS	31.7	.48	-38.51	50.35	54	-3.65	-	-	104	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection


VERTICAL RESULT

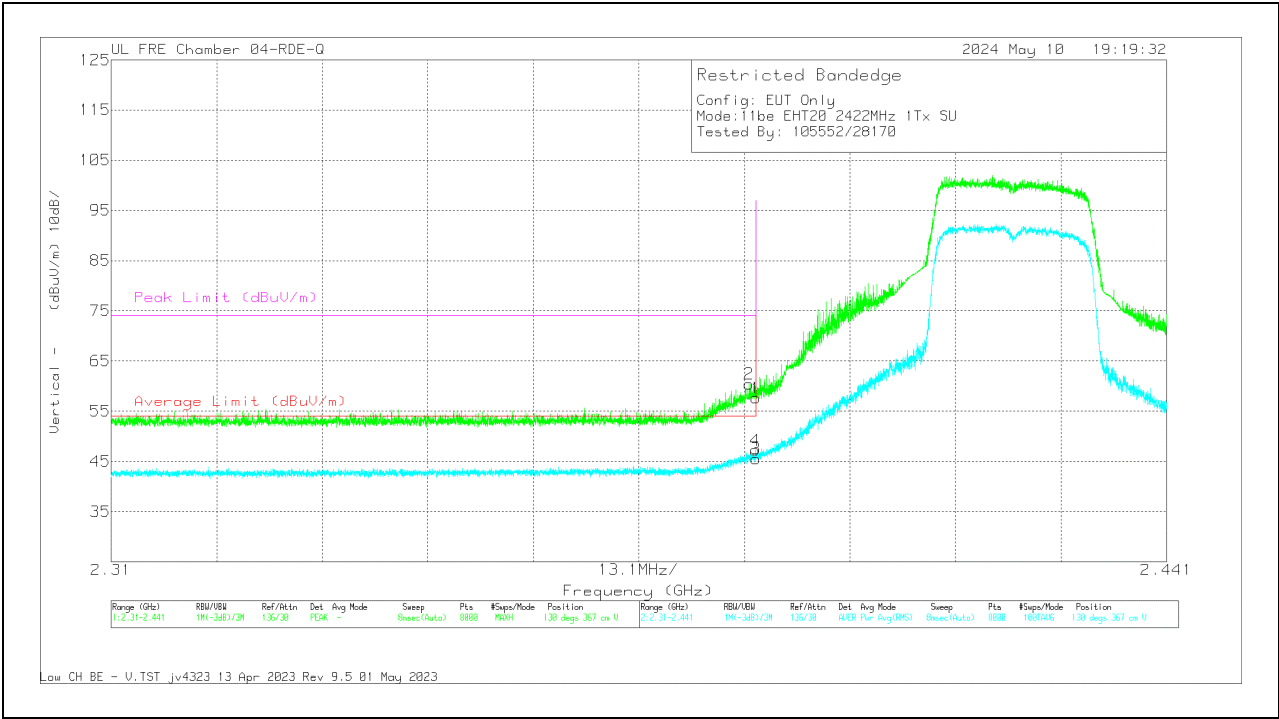

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389216	67.27	Pk	31.7	0	-38.51	60.46	-	-	74	-13.54	130	367	V
4	* 2.389969	53.54	RMS	31.7	.48	-38.51	47.21	54	-6.79	-	-	130	367	V
1	* 2.39	64.41	Pk	31.7	0	-38.51	57.6	-	-	74	-16.4	130	367	V
3	* 2.39	51.84	RMS	31.7	.48	-38.51	45.51	54	-8.49	-	-	130	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

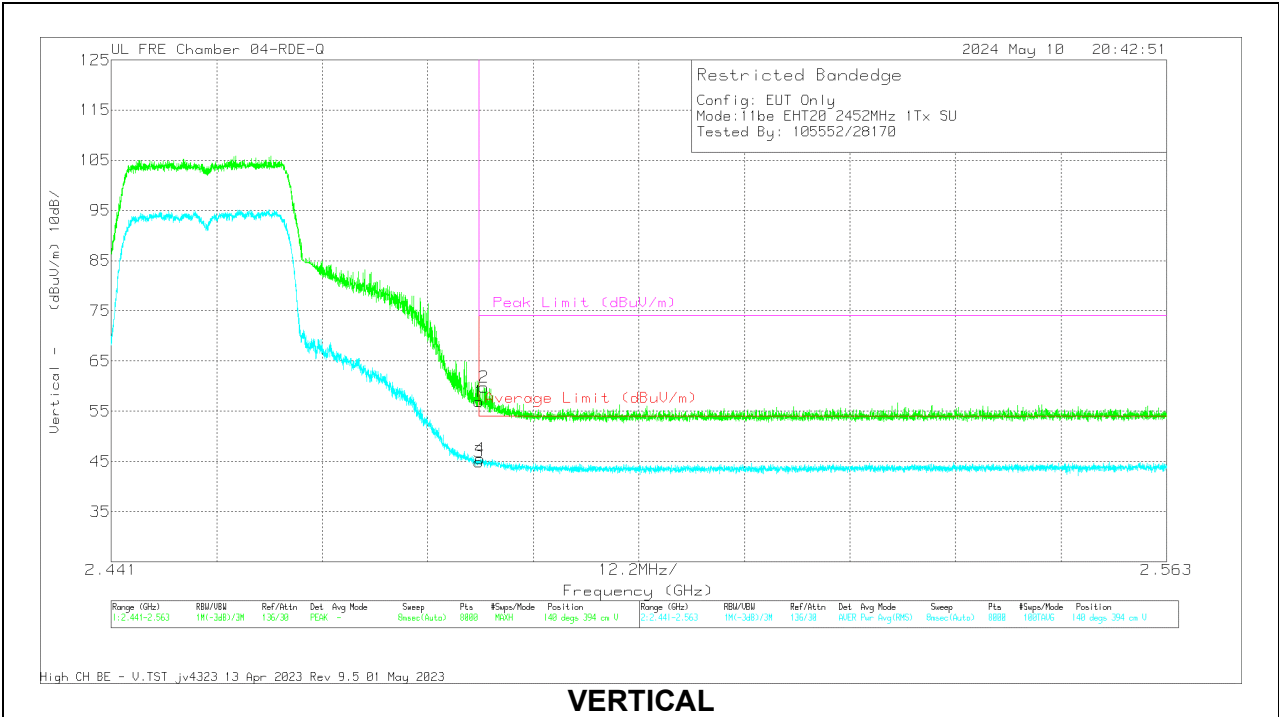


VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	63.2	Pk	32.1	0	-38.38	56.92	-	-	74	-17.08	140	394	V
3	* 2.4835	50.72	RMS	32.1	.48	-38.38	44.92	54	-9.08	-	-	140	394	V
4	* 2.48366	51.33	RMS	32.1	.48	-38.37	45.54	54	-8.46	-	-	140	394	V
2	* 2.484087	66.05	Pk	32.1	0	-38.35	59.8	-	-	74	-14.2	140	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

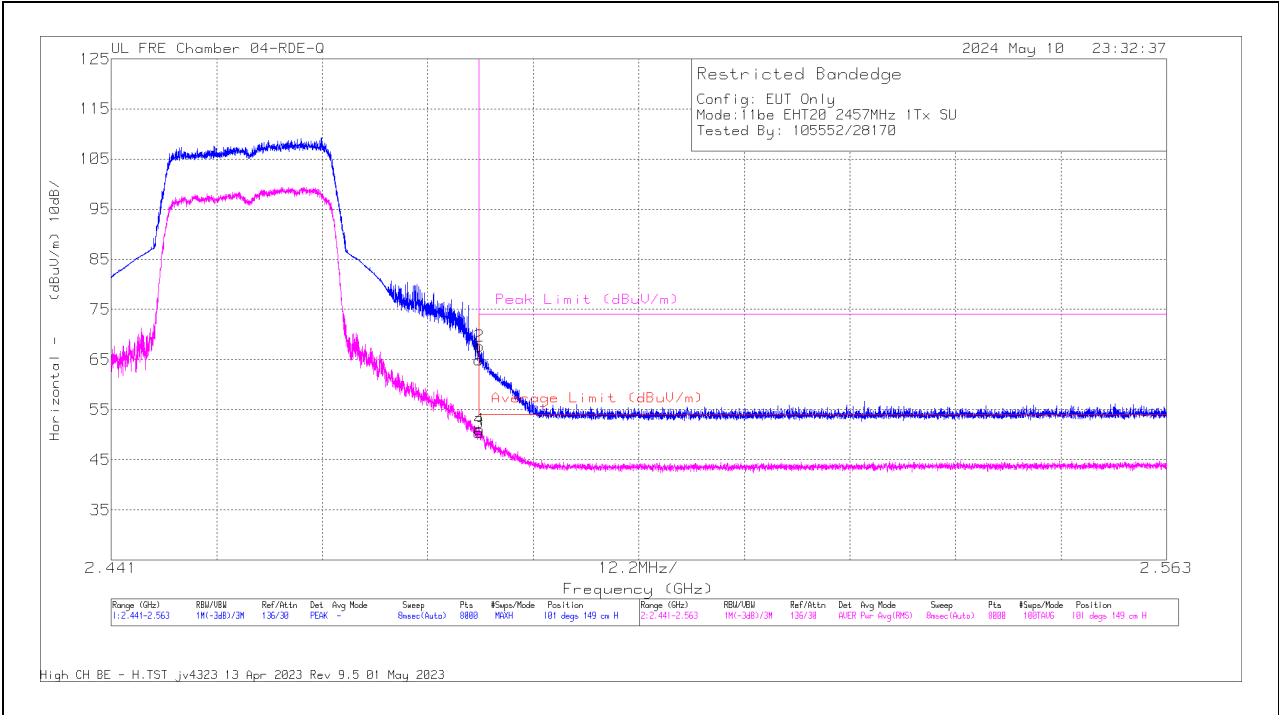

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.16	Pk	32.1	0	-38.38	64.88	-	-	74	-9.12	101	149	H
3	* 2.4835	56.21	RMS	32.1	.48	-38.38	50.41	54	-3.59	-	-	101	149	H
4	* 2.483553	56.79	RMS	32.1	.48	-38.37	51	54	-3	-	-	101	149	H
2	* 2.483584	73.98	Pk	32.1	0	-38.37	67.71	-	-	74	-6.29	101	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

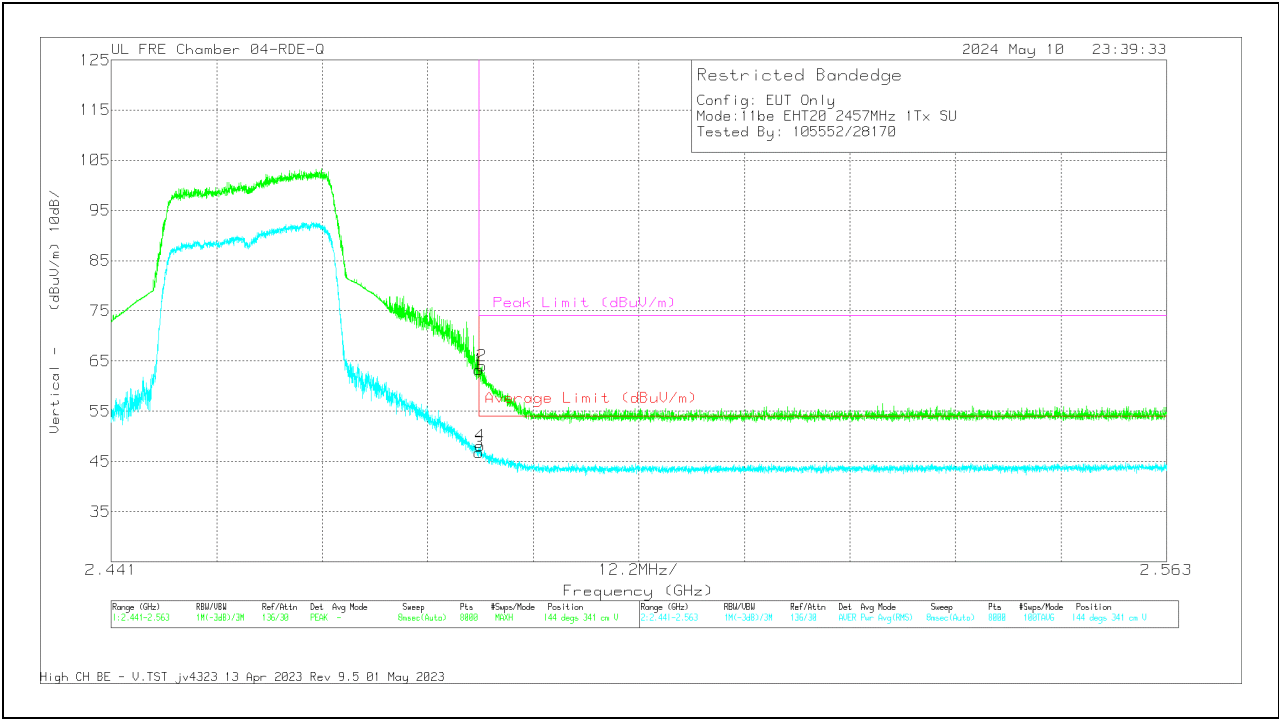


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	69.59	Pk	32.1	0	-38.38	63.31	-	-	74	-10.69	144	341	V
3	* 2.4835	52.56	RMS	32.1	.48	-38.38	46.76	54	-7.24	-	-	144	341	V
4	* 2.48366	53.96	RMS	32.1	.48	-38.37	48.17	54	-5.83	-	-	144	341	V
2	* 2.483873	70.28	Pk	32.1	0	-38.36	64.02	-	-	74	-9.98	144	341	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

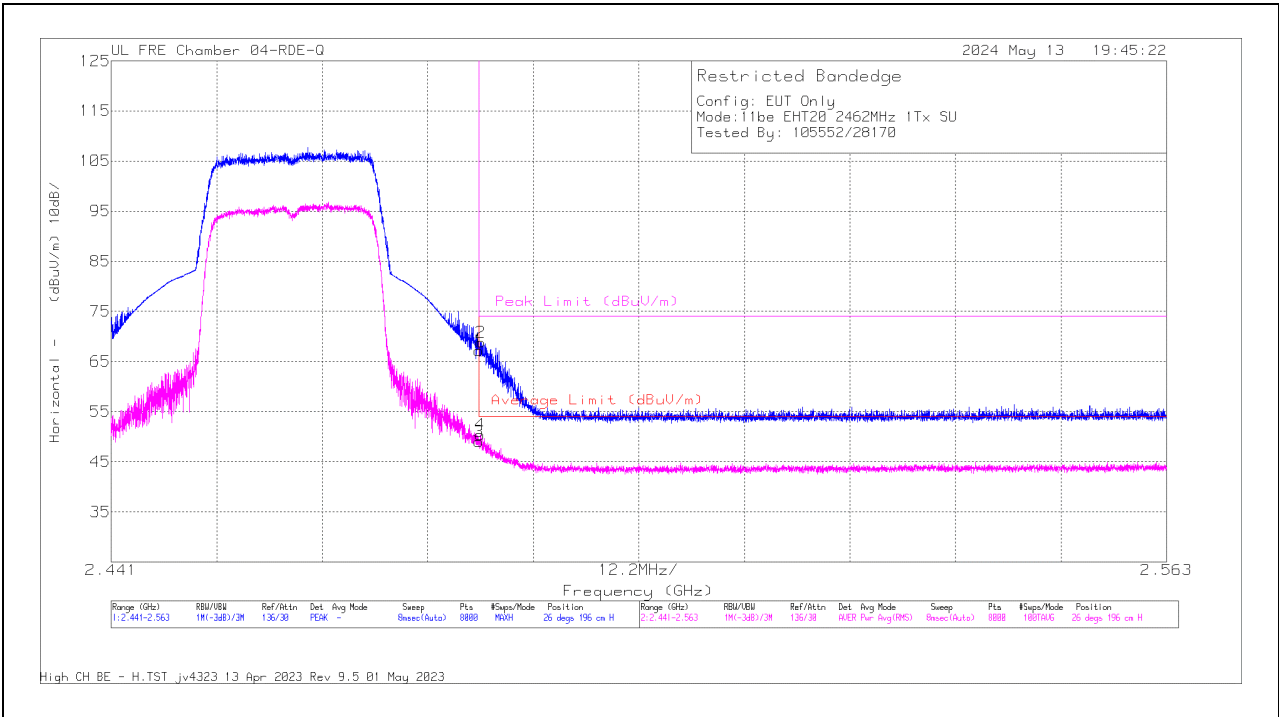

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.45	Pk	32.1	0	-38.38	67.17	-	-	74	-6.83	26	196	H
3	* 2.4835	54.78	RMS	32.1	.48	-38.38	48.98	54	-5.02	-	-	26	196	H
4	* 2.48369	56.23	RMS	32.1	.48	-38.37	50.44	54	-3.56	-	-	26	196	H
2	* 2.483751	75.13	Pk	32.1	0	-38.37	68.86	-	-	74	-5.14	26	196	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

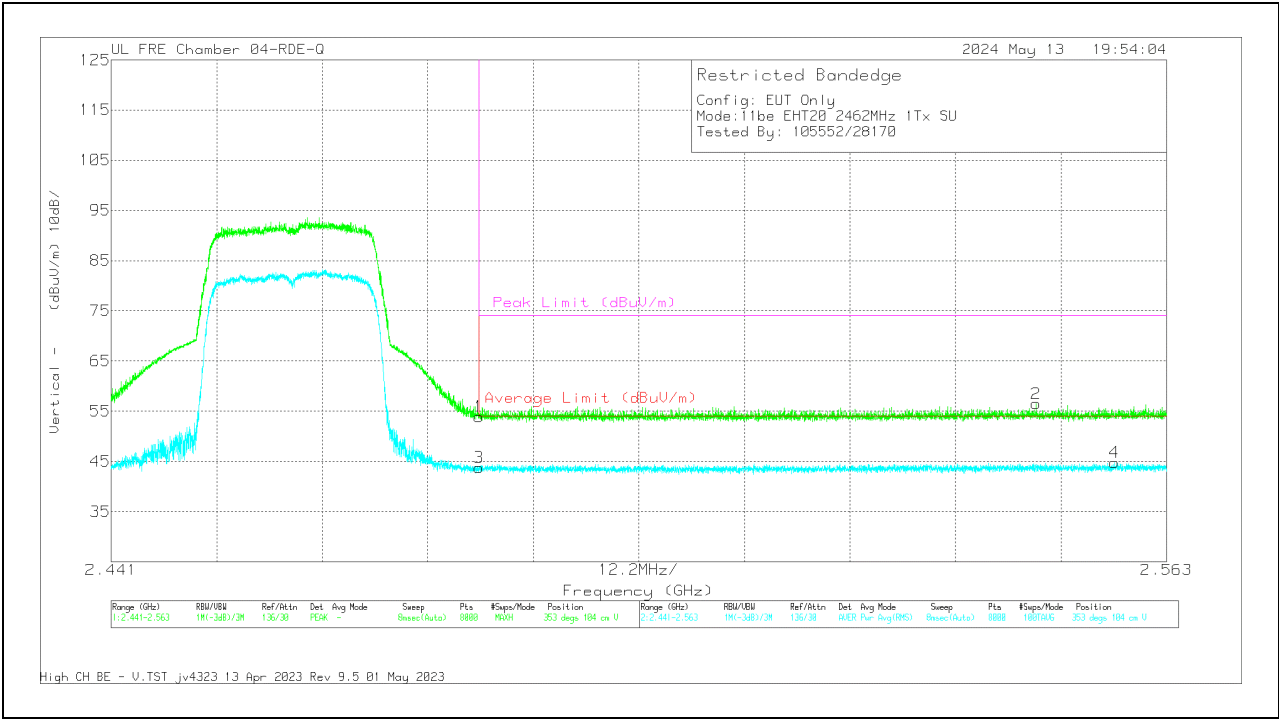


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.22	Pk	32.1	0	-38.38	53.94	-	-	74	-20.06	353	104	V
3	* 2.4835	49.53	RMS	32.1	.48	-38.38	43.73	54	-10.27	-	-	353	104	V
2	* 2.547932	62.42	Pk	32.3	0	-38.24	56.48	-	-	74	-17.52	353	104	V
4	* 2.556991	50.08	RMS	32.4	.48	-38.23	44.73	54	-9.27	-	-	353	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

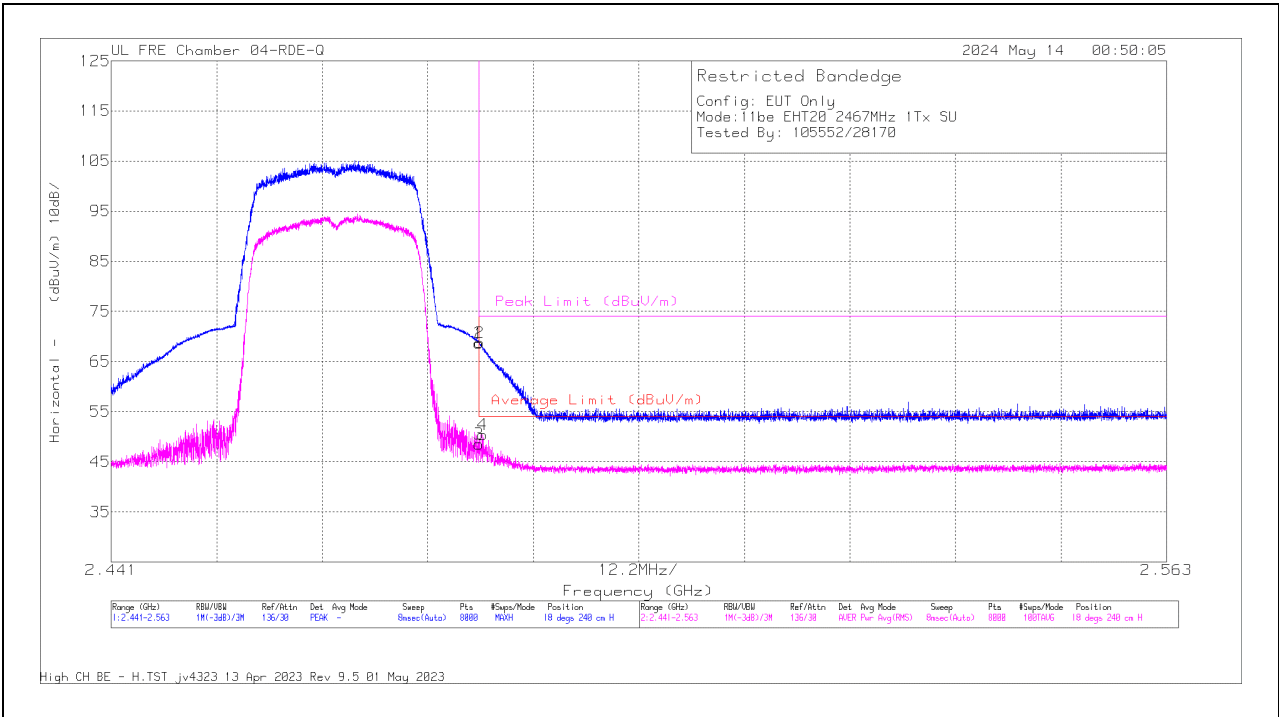

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.89	Pk	32.1	0	-38.38	68.61	-	-	74	-5.39	18	240	H
3	* 2.4835	54.35	RMS	32.1	.48	-38.38	48.55	54	-5.45	-	-	18	240	H
2	* 2.483568	75.02	Pk	32.1	0	-38.37	68.75	-	-	74	-5.25	18	240	H
4	* 2.483919	56.15	RMS	32.1	.48	-38.36	50.37	54	-3.63	-	-	18	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

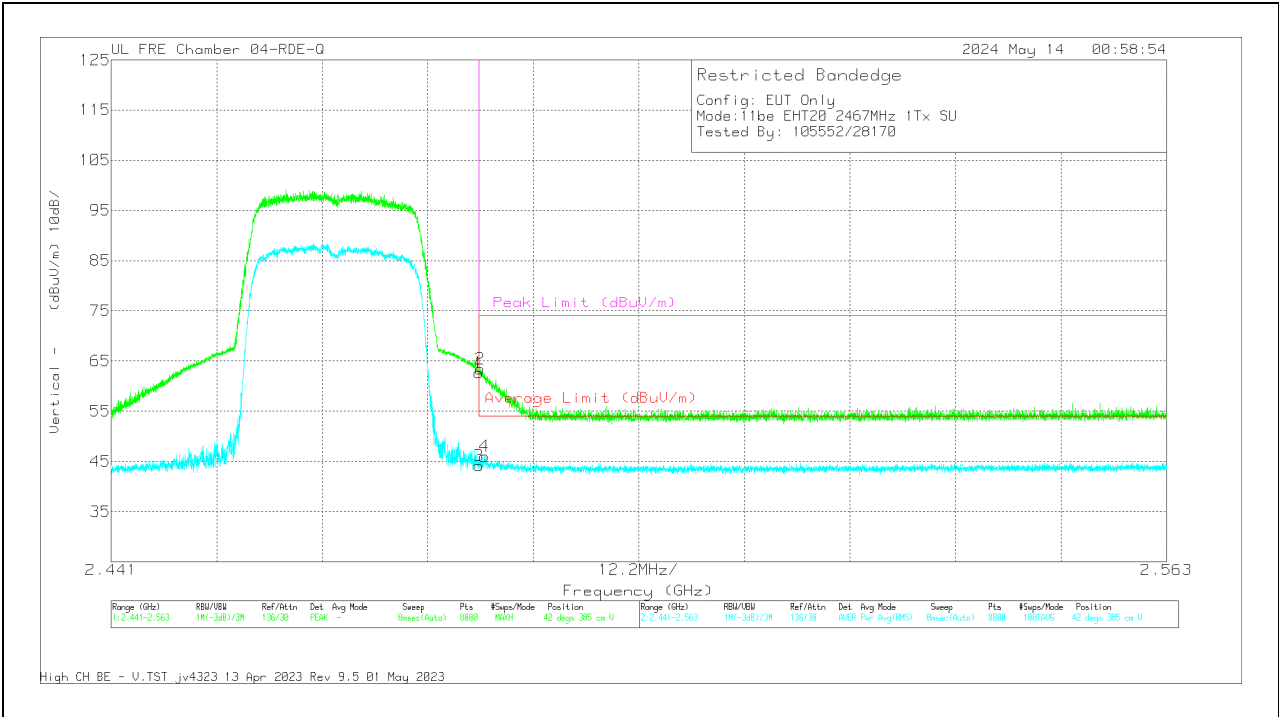


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	68.95	Pk	32.1	0	-38.38	62.67	-	-	74	-11.33	42	385	V
3	* 2.4835	49.9	RMS	32.1	.48	-38.38	44.1	54	-9.9	-	-	42	385	V
2	* 2.483629	69.67	Pk	32.1	0	-38.37	63.4	-	-	74	-10.6	42	385	V
4	* 2.484178	51.77	RMS	32.1	.48	-38.35	46	54	-8	-	-	42	385	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

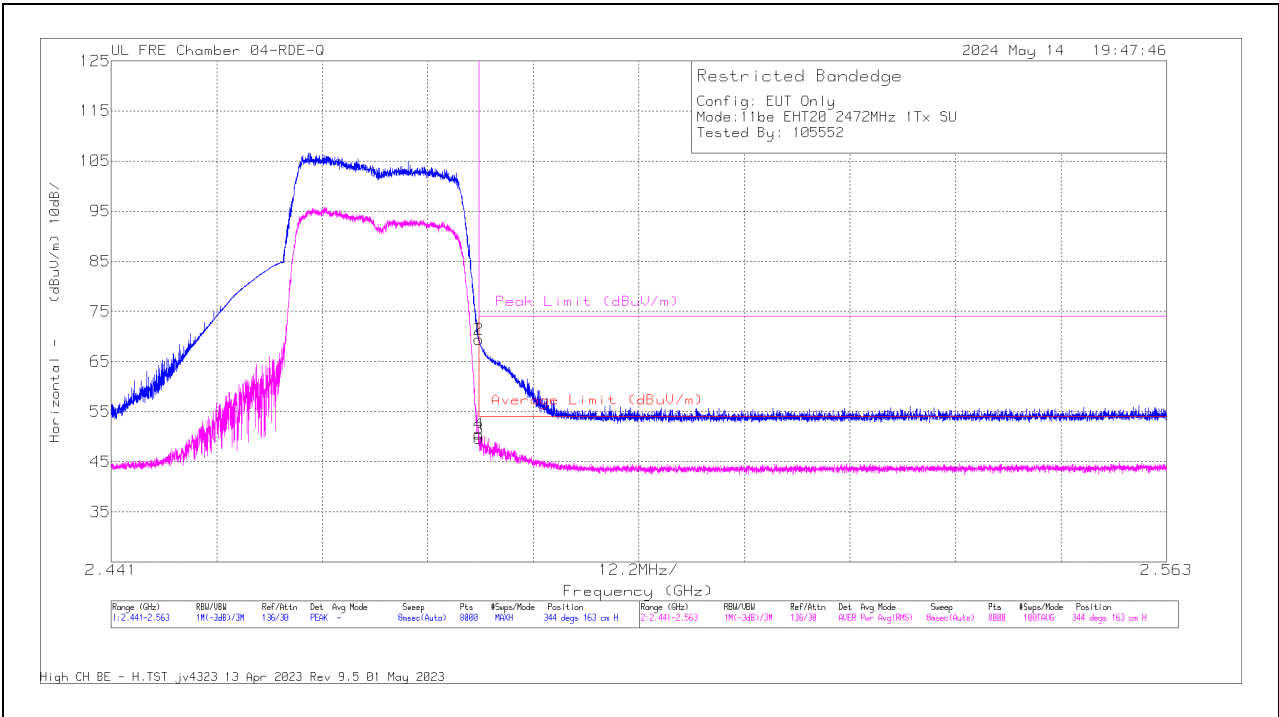

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.69	Pk	32.1	0	-38.38	69.41	-	-	74	-4.59	344	163	H
3	* 2.4835	55.46	RMS	32.1	.48	-38.38	49.66	54	-4.34	-	-	344	163	H
2	* 2.483507	75.68	Pk	32.1	0	-38.37	69.41	-	-	74	-4.59	344	163	H
4	* 2.483507	56.33	RMS	32.1	.48	-38.37	50.54	54	-3.46	-	-	344	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

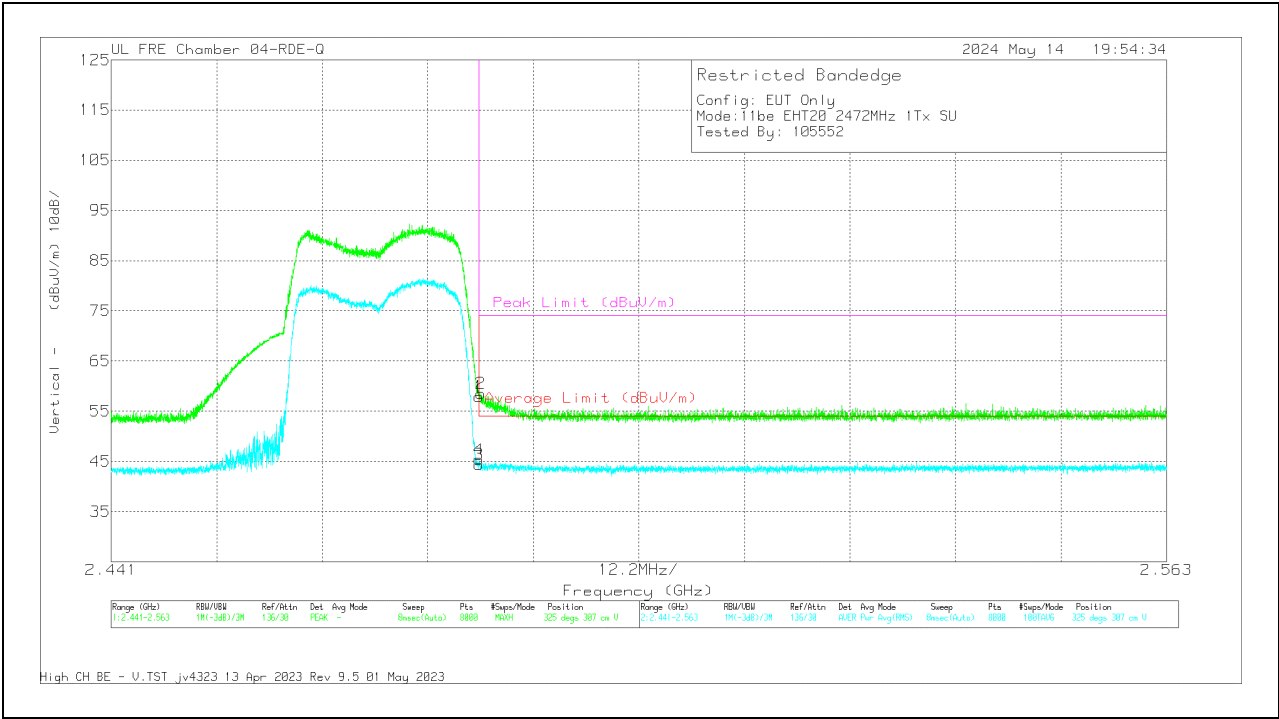


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	64.17	Pk	32.1	0	-38.38	57.89	-	-	74	-16.11	325	307	V
3	* 2.4835	50.2	RMS	32.1	.48	-38.38	44.4	54	-9.6	-	-	325	307	V
4	* 2.483538	51.13	RMS	32.1	.48	-38.37	45.34	54	-8.66	-	-	325	307	V
2	* 2.483721	64.86	Pk	32.1	0	-38.37	58.59	-	-	74	-15.41	325	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

ANT 3 : 26 Tone, RU Index 0

BAND-EDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

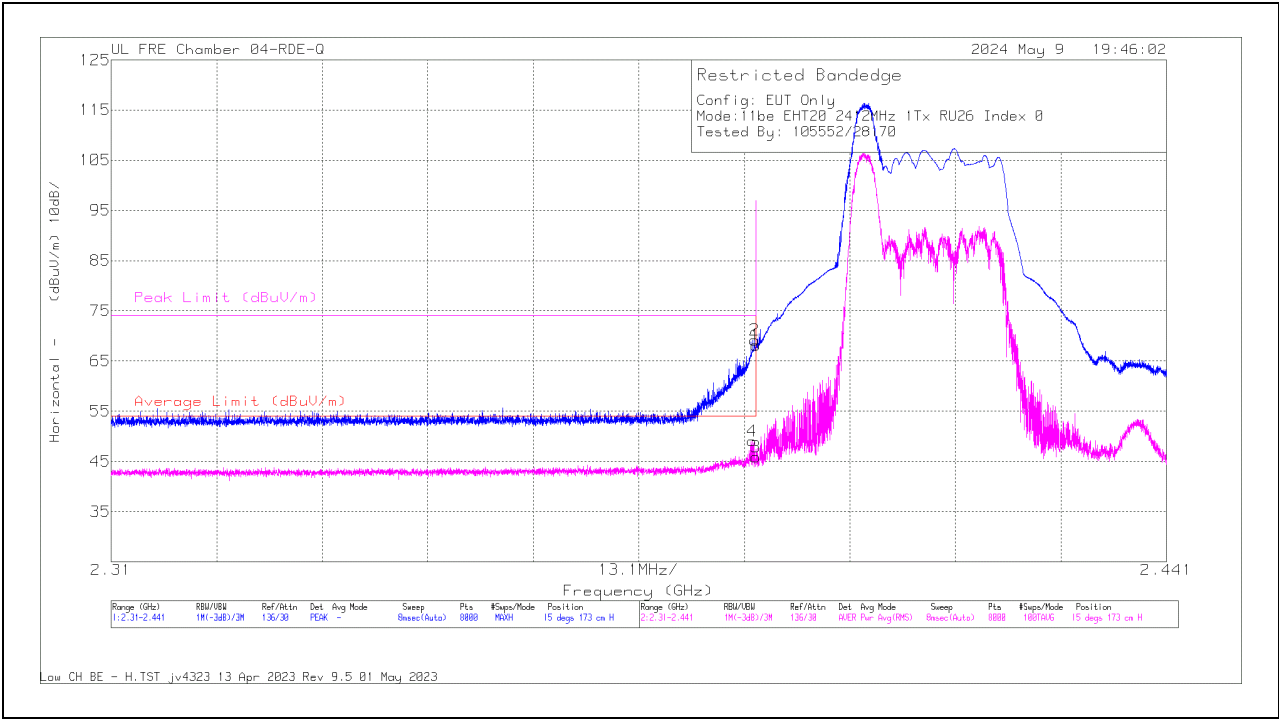

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.389543	55.31	RMS	31.7	.58	-38.51	49.08	54	-4.92	-	-	15	173	H
2	* 2.389871	76.01	Pk	31.7	0	-38.51	69.2	-	-	74	-4.8	15	173	H
1	* 2.39	74.97	Pk	31.7	0	-38.51	68.16	-	-	74	-5.84	15	173	H
3	* 2.39	52.1	RMS	31.7	.58	-38.51	45.87	54	-8.13	-	-	15	173	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

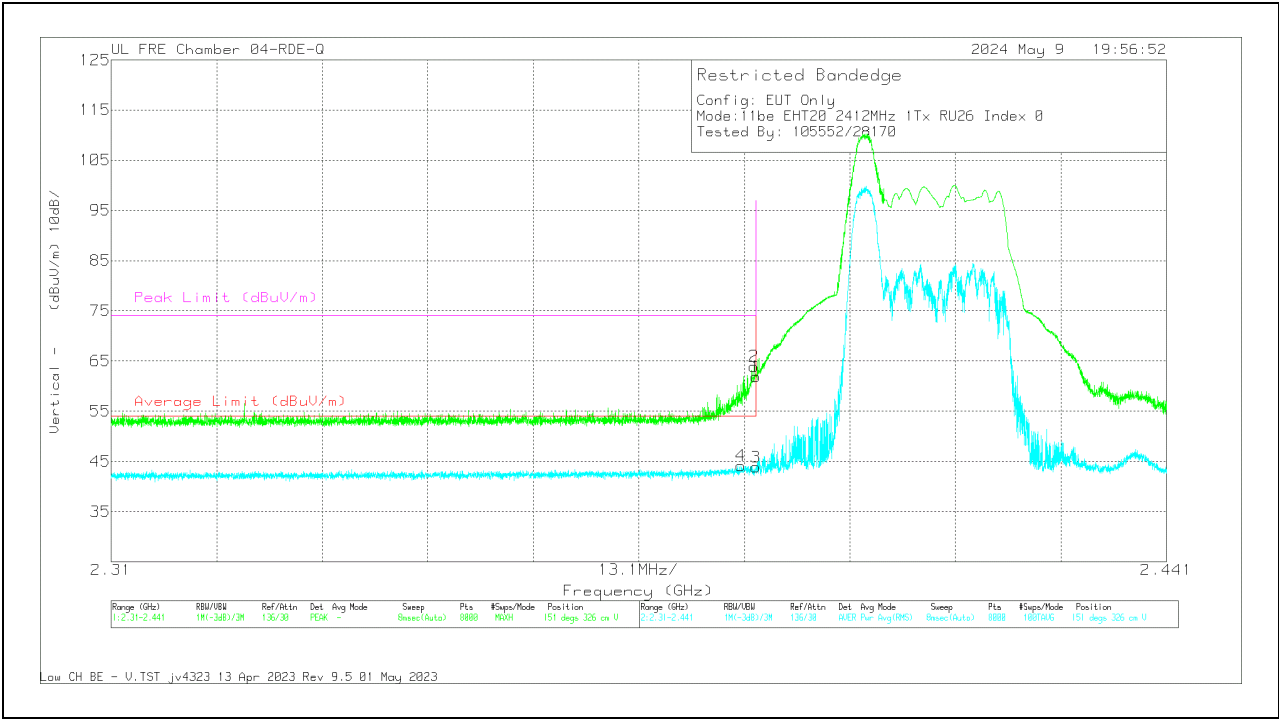


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.388184	50.94	RMS	31.7	.58	-38.51	44.71	54	-9.29	-	-	151	326	V
2	* 2.389805	70.74	PK	31.7	0	-38.51	63.93	-	-	74	-10.07	151	326	V
1	* 2.39	68.68	PK	31.7	0	-38.51	61.87	-	-	74	-12.13	151	326	V
3	* 2.39	50.65	RMS	31.7	.58	-38.51	44.42	54	-9.58	-	-	151	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

ANT 3 : 26-Tone, RU Index 8

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

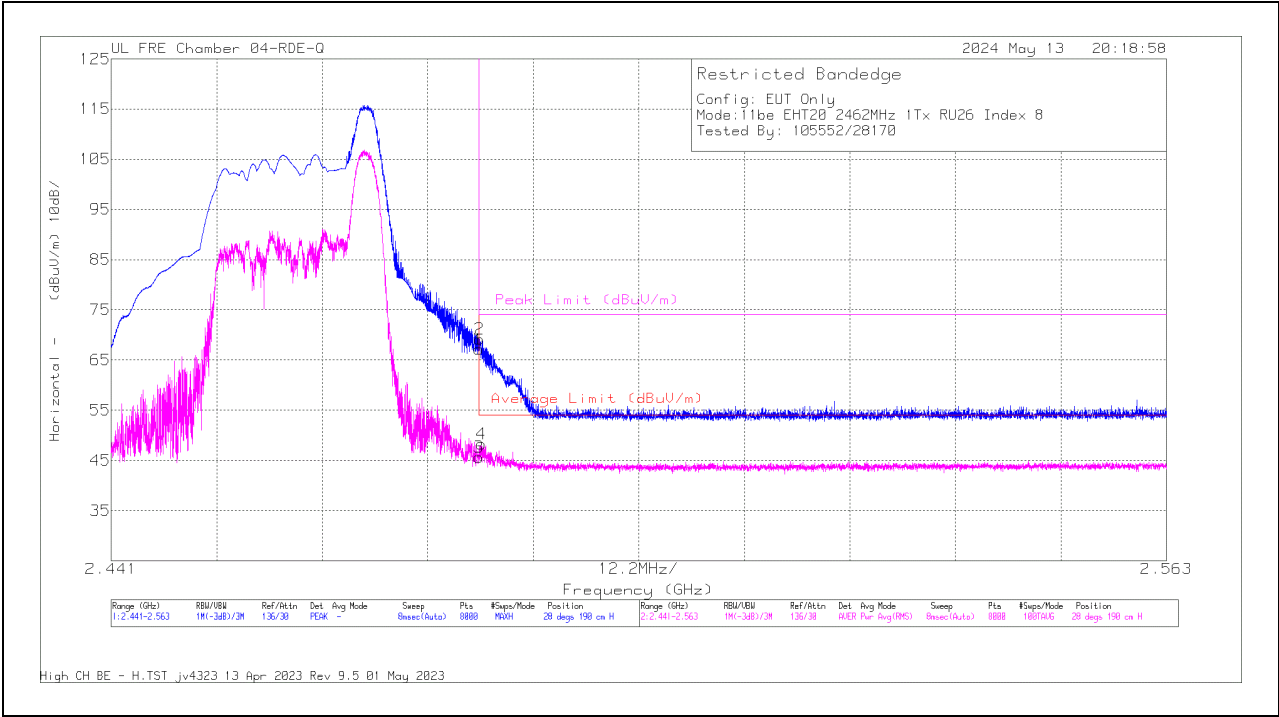

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.4	Pk	32.1	0	-38.38	67.12	-	-	74	-6.88	28	190	H
3	* 2.4835	51.38	RMS	32.1	.58	-38.38	45.68	54	-8.32	-	-	28	190	H
2	* 2.483568	75.46	Pk	32.1	0	-38.37	69.19	-	-	74	-4.81	28	190	H
4	* 2.483812	53.94	RMS	32.1	.58	-38.37	48.25	54	-5.75	-	-	28	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

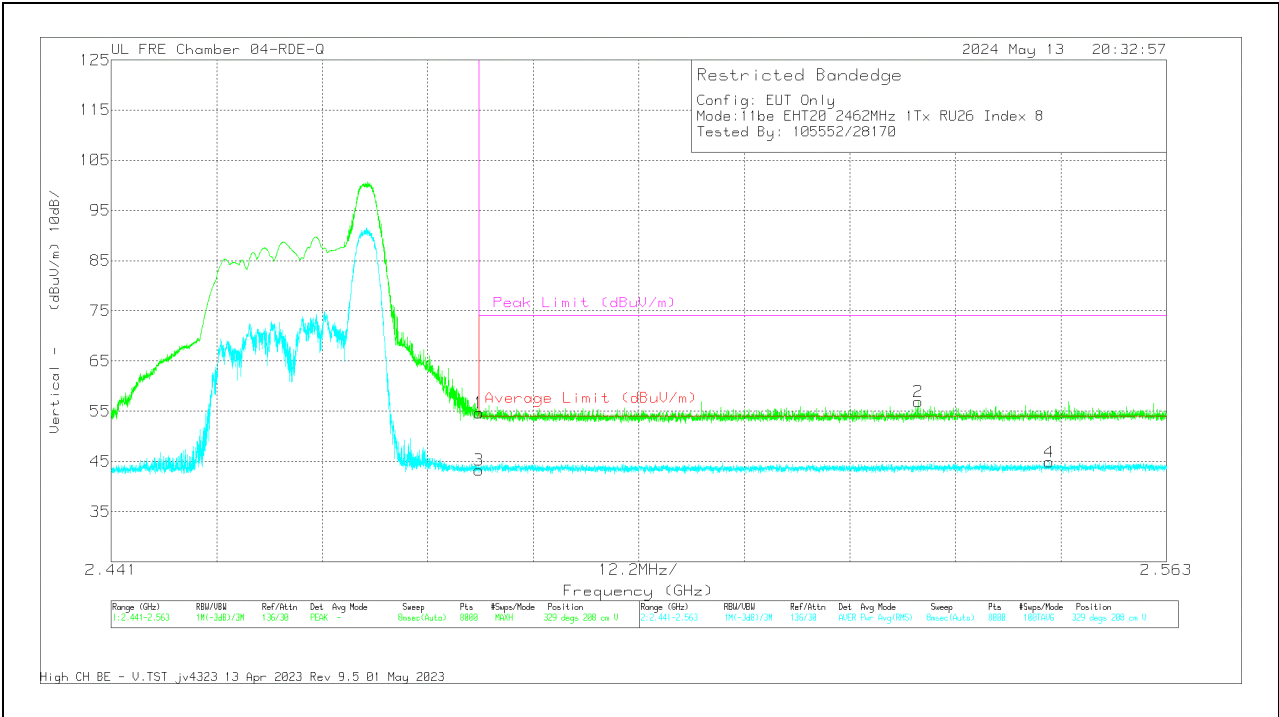


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.94	Pk	32.1	0	-38.38	54.66	-	-	74	-19.34	329	208	V
3	* 2.4835	48.97	RMS	32.1	.58	-38.38	43.27	54	-10.73	-	-	329	208	V
2	* 2.534296	62.93	Pk	32.3	0	-38.28	56.95	-	-	74	-17.05	329	208	V
4	* 2.549442	50.2	RMS	32.3	.58	-38.24	44.84	54	-9.16	-	-	329	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

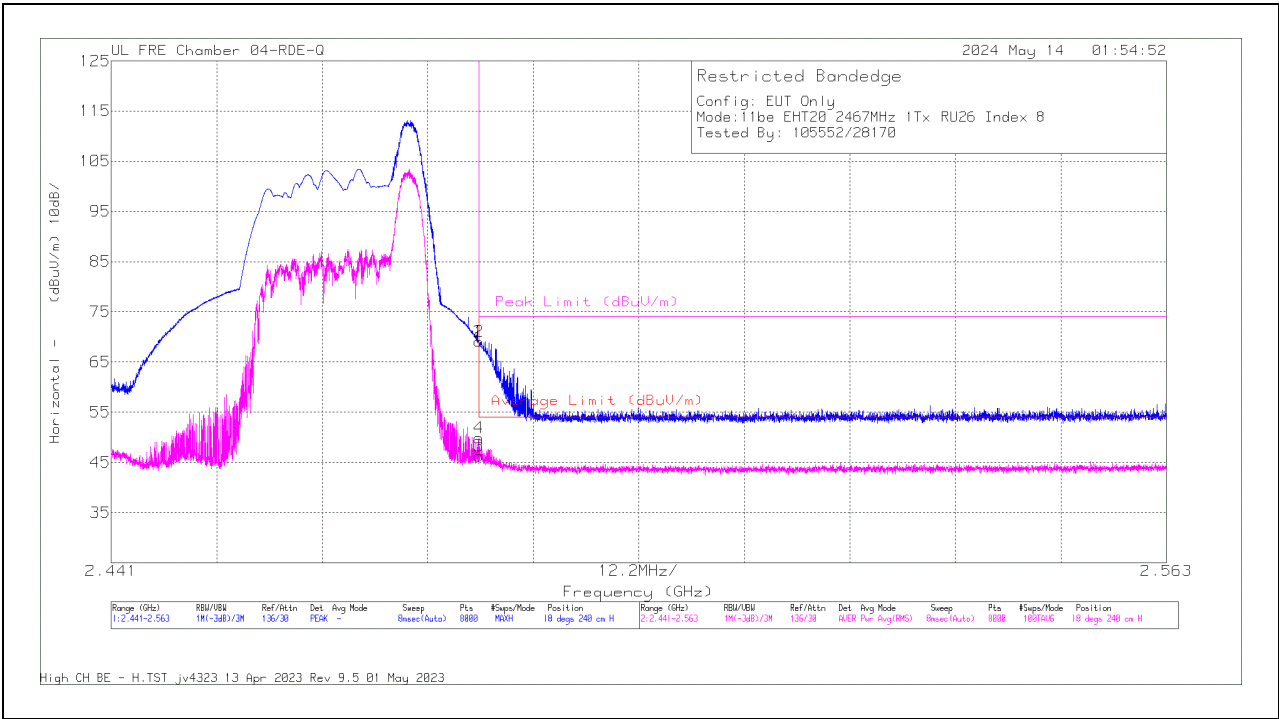

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.39	Pk	32.1	0	-38.38	69.11	-	-	74	-4.89	18	240	H
3	* 2.4835	51.93	RMS	32.1	.58	-38.38	46.23	54	-7.77	-	-	18	240	H
2	* 2.483507	75.38	Pk	32.1	0	-38.37	69.11	-	-	74	-4.89	18	240	H
4	* 2.483523	55.55	RMS	32.1	.58	-38.37	49.86	54	-4.14	-	-	18	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

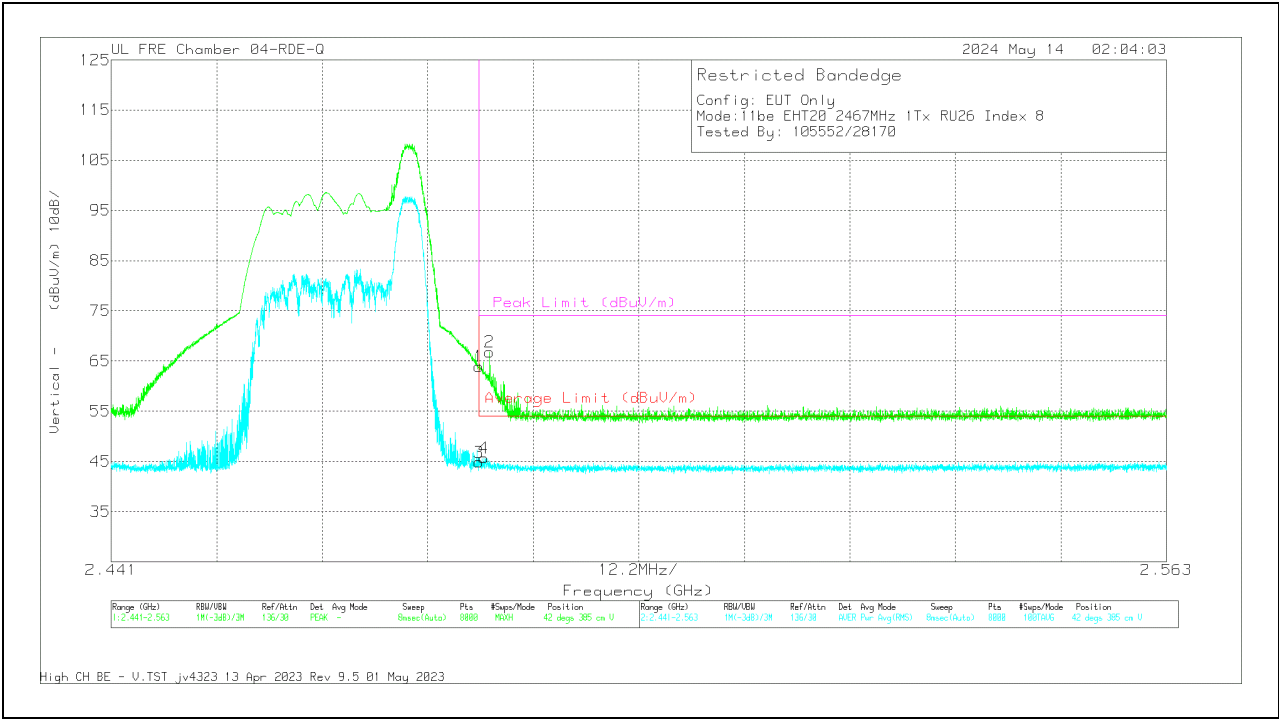


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	70.23	Pk	32.1	0	-38.38	63.95	-	-	74	-10.05	42	385	V
3	* 2.4835	50.53	RMS	32.1	.58	-38.38	44.83	54	-9.17	-	-	42	385	V
4	* 2.484102	51.37	RMS	32.1	.58	-38.35	45.7	54	-8.3	-	-	42	385	V
2	* 2.484773	73	Pk	32.1	0	-38.3	66.8	-	-	74	-7.2	42	385	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

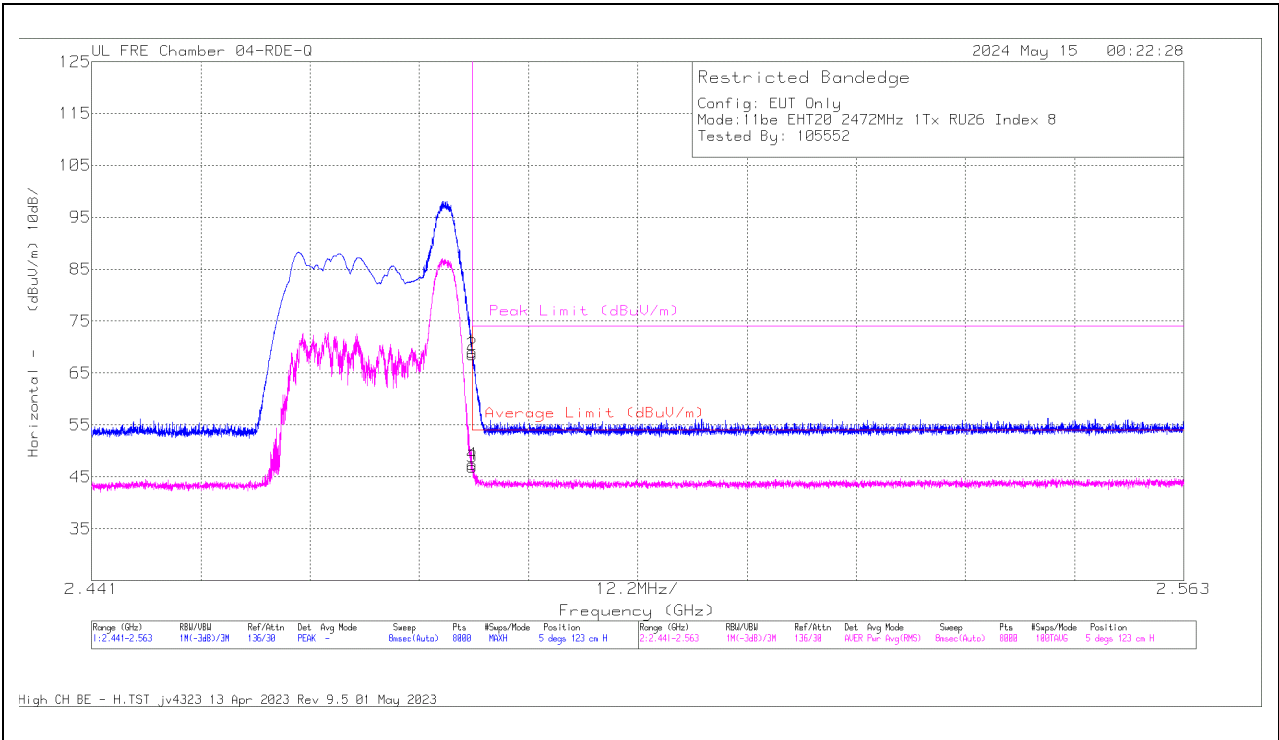

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.3	Pk	32.1	0	-38.38	69.02	-	-	74	-4.98	5	123	H
3	* 2.4835	52.56	RMS	32.1	.58	-38.38	46.86	54	-7.14	-	-	5	123	H
2	* 2.483523	74.86	Pk	32.1	0	-38.37	68.59	-	-	74	-5.41	5	123	H
4	* 2.483523	53.1	RMS	32.1	.58	-38.37	47.41	54	-6.59	-	-	5	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

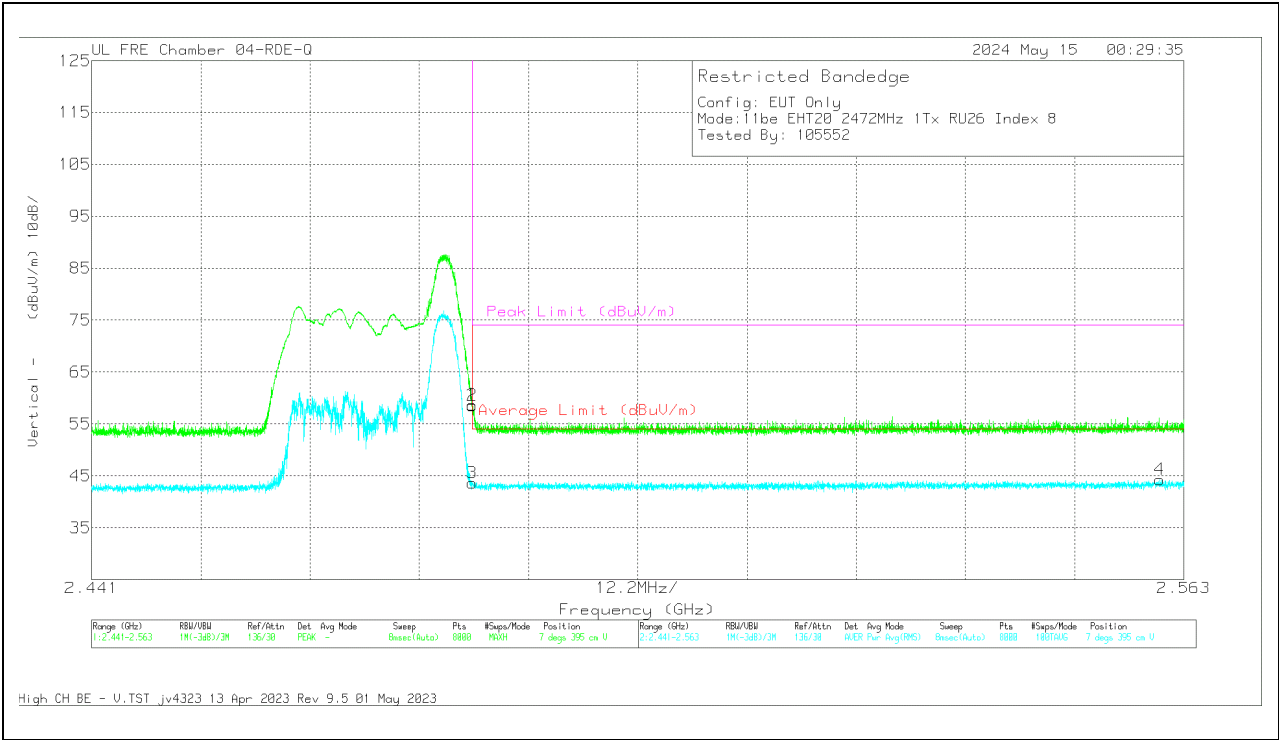

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	64.92	Pk	32.1	0	-38.38	58.64	-	-	74	-15.36	7	395	V
3	* 2.4835	49.87	RMS	32.1	.58	-38.38	44.17	54	-9.83	-	-	7	395	V
2	* 2.483523	64.78	Pk	32.1	0	-38.37	58.51	-	-	74	-15.49	7	395	V
4	* 2.560301	50.18	RMS	32.4	.58	-38.26	44.90	54	-9.10	-	-	7	395	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

10.1.7. 802.11be EHT20 MIMO MODE, BAND-EDGE

ANT 4 + ANT 3 : SU

BAND-EDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

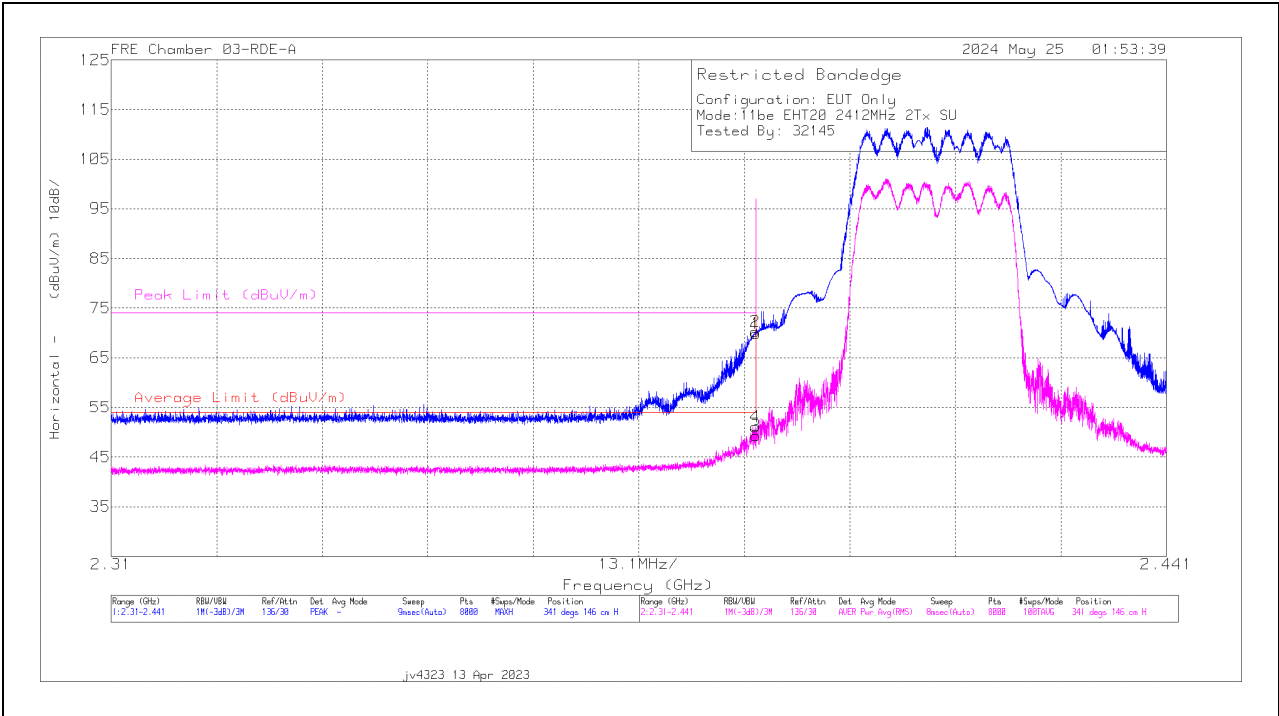

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	77.82	Pk	32.1	0	-40.07	69.85	-	-	74	-4.15	341	146	H
2	* 2.389985	78.27	Pk	32.1	0	-40.07	70.3	-	-	74	-3.7	341	146	H
3	* 2.39	56.8	RMS	32.1	.48	-40.07	49.31	54	-4.69	-	-	341	146	H
4	* 2.389969	58.63	RMS	32.1	.48	-40.07	51.14	54	-2.86	-	-	341	146	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

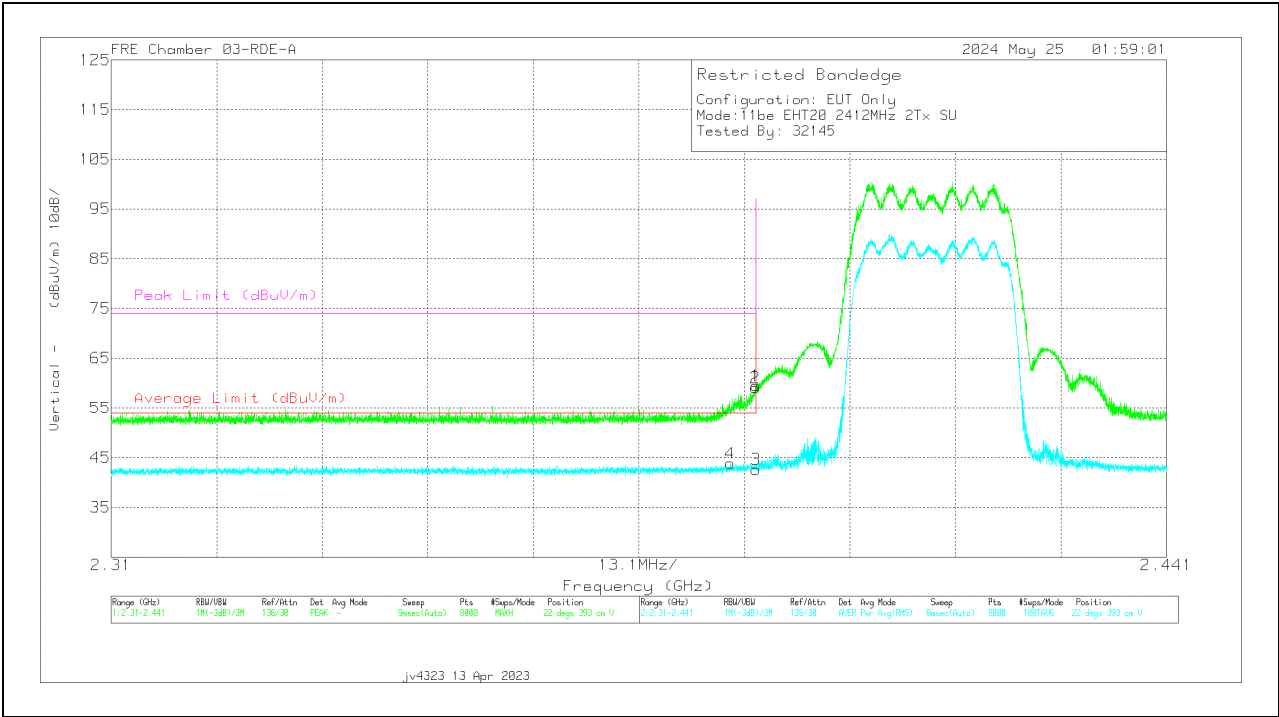


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	67.44	Pk	32.1	0	-40.07	59.47	-	-	74	-14.53	22	393	V
2	* 2.389969	67.06	Pk	32.1	0	-40.07	59.09	-	-	74	-14.91	22	393	V
3	* 2.39	50.17	RMS	32.1	.48	-40.07	42.68	54	-11.32	-	-	22	393	V
4	* 2.386857	51.32	RMS	32.1	.48	-40.06	43.84	54	-10.16	-	-	22	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

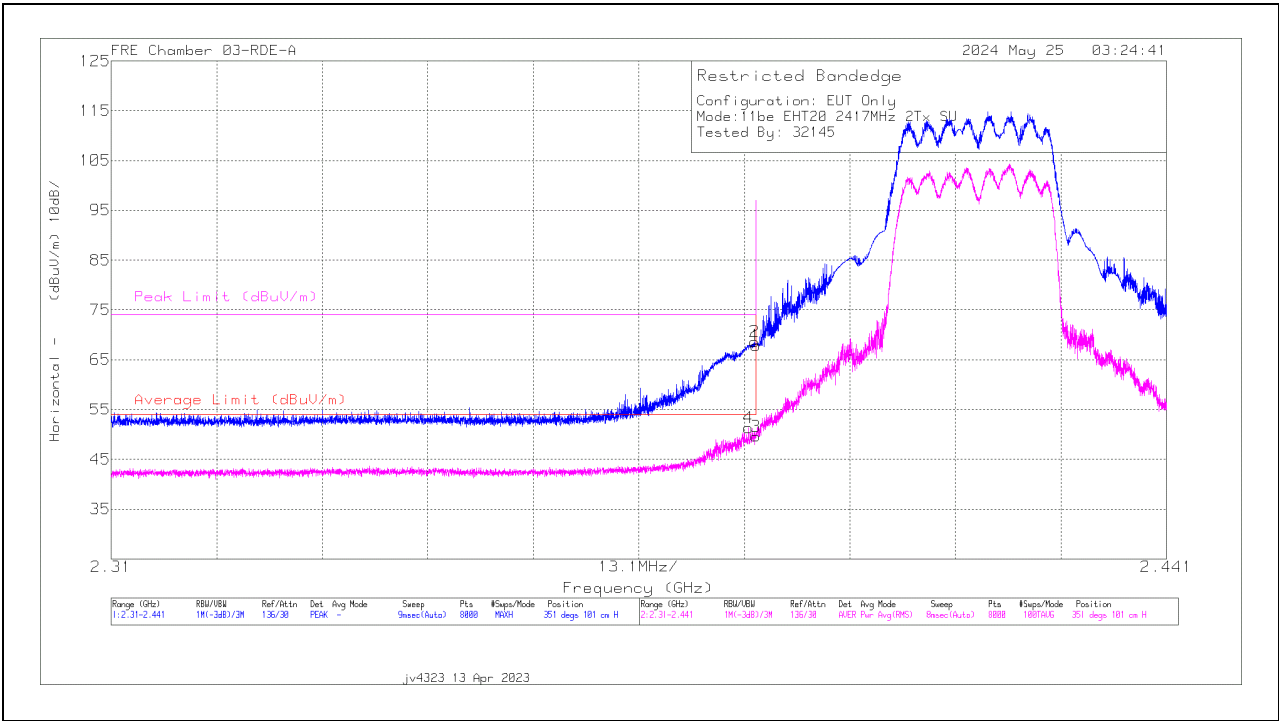

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.87	Pk	32.1	0	-40.07	67.9	-	-	74	-6.1	351	101	H
2	* 2.389854	76.6	Pk	32.1	0	-40.07	68.63	-	-	74	-5.37	351	101	H
3	* 2.39	57.12	RMS	32.1	.48	-40.07	49.63	54	-4.37	-	-	351	101	H
4	* 2.389117	58.77	RMS	32.1	.48	-40.05	51.3	54	-2.7	-	-	351	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

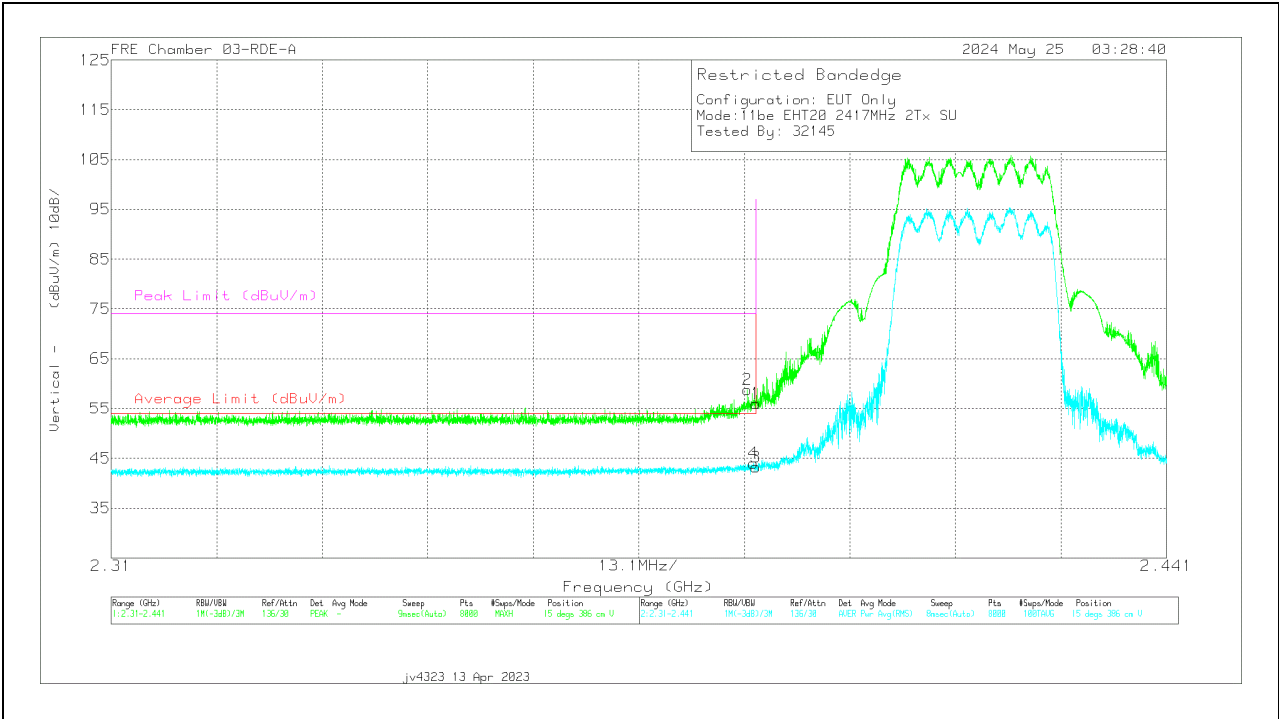


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	22673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	64.01	Pk	32.1	0	-40.07	56.04	-	-	74	-17.96	15	386	V
2	* 2.388986	66.76	Pk	32.1	0	-40.05	58.81	-	-	74	-15.19	15	386	V
3	* 2.39	50.71	RMS	32.1	.48	-40.07	43.22	54	-10.78	-	-	15	386	V
4	* 2.38974	51.54	RMS	32.1	.48	-40.06	44.06	54	-9.94	-	-	15	386	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

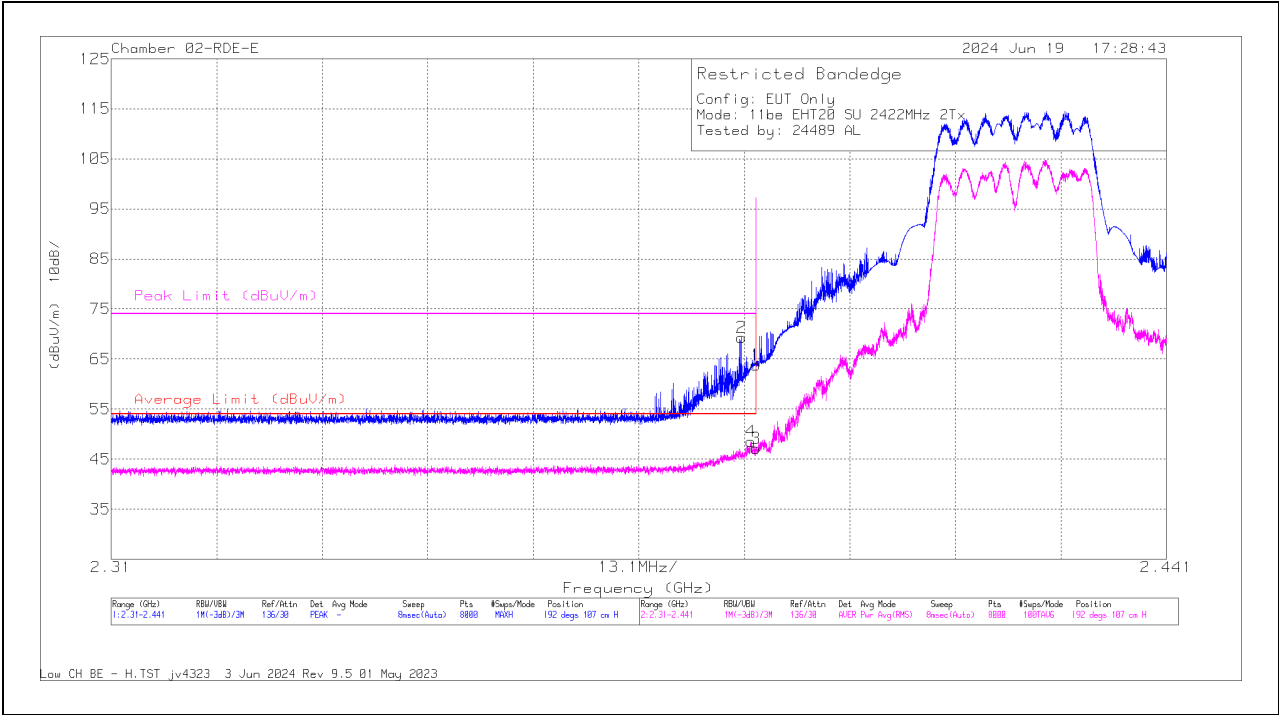

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	70.81	Pk	32.3	0	-39.27	63.84	-	-	74	-10.16	192	107	H
2	* 2.388266	76.3	PK	32.3	0	-39.28	69.32	-	-	74	-4.68	192	107	H
3	* 2.39	53.67	RMS	32.3	.48	-39.27	47.18	54	-6.82	-	-	192	107	H
4	* 2.389445	55.01	RMS	32.3	.48	-39.28	48.51	54	-5.49	-	-	192	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

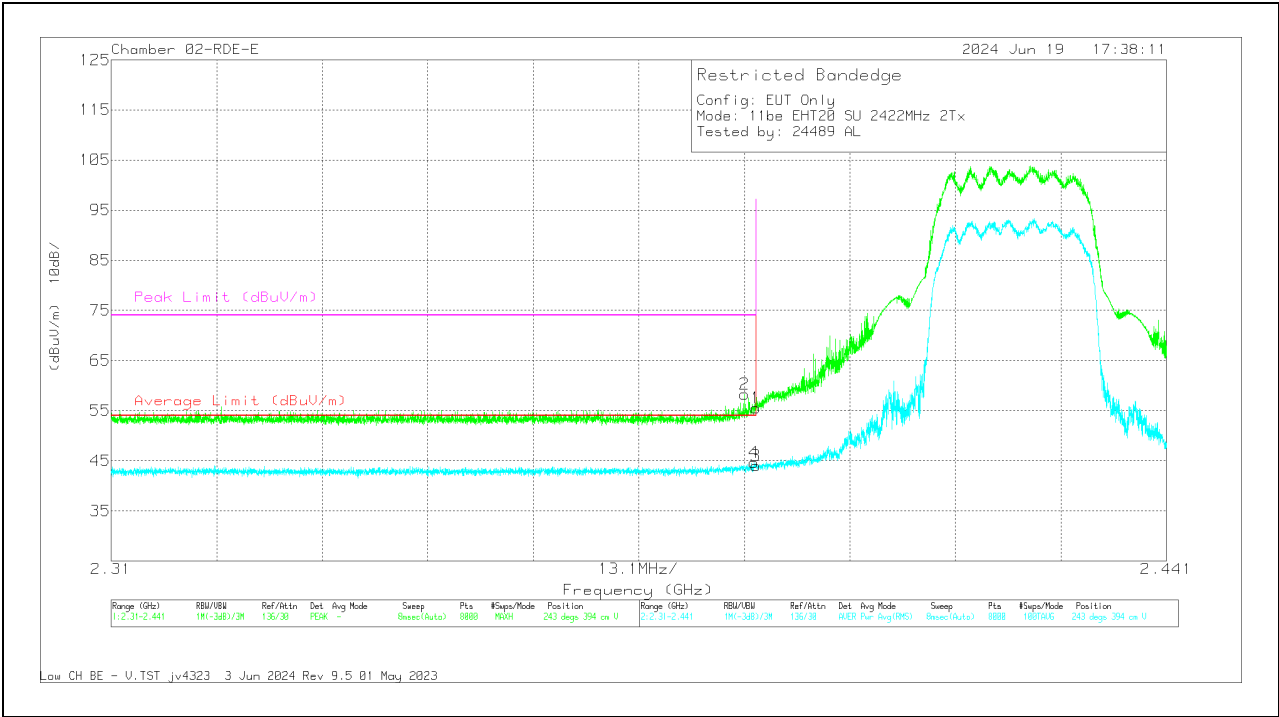


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	62.47	Pk	32.3	0	-39.27	55.5	-	-	74	-18.5	243	394	V
2	* 2.388659	65.28	Pk	32.3	0	-39.28	58.3	-	-	74	-15.7	243	394	V
3	* 2.39	50.46	RMS	32.3	.48	-39.27	43.97	54	-10.03	-	-	243	394	V
4	* 2.389822	51.16	RMS	32.3	.48	-39.27	44.67	54	-9.33	-	-	243	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (LOW CHANNEL, CH 4)


HORIZONTAL RESULT

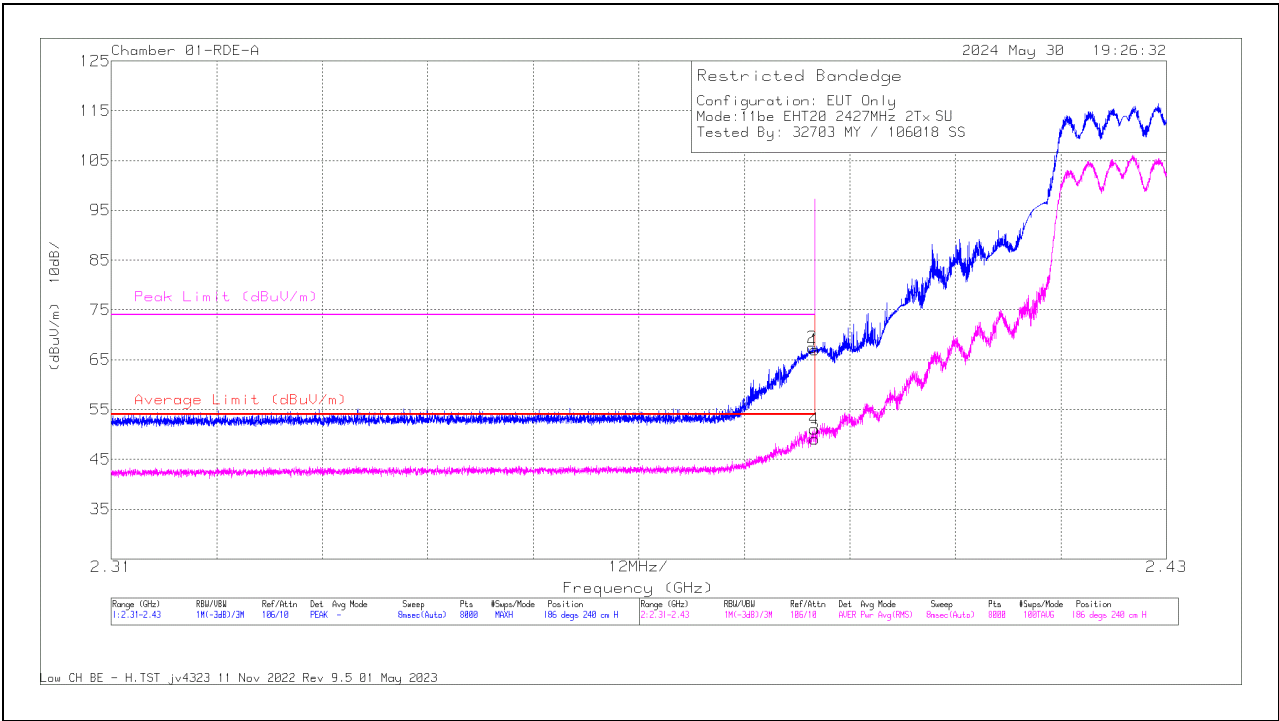

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.11	Pk	32.2	0	-18.3	67.01	-	-	74	-6.99	186	240	H
2	* 2.389736	53.54	Pk	32.2	0	-18.3	67.44	-	-	74	-6.56	186	240	H
3	* 2.39	34.72	RMS	32.2	.48	-18.3	49.1	54	-4.9	-	-	186	240	H
4	* 2.389961	36.75	RMS	32.2	.48	-18.3	51.13	54	-2.87	-	-	186	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

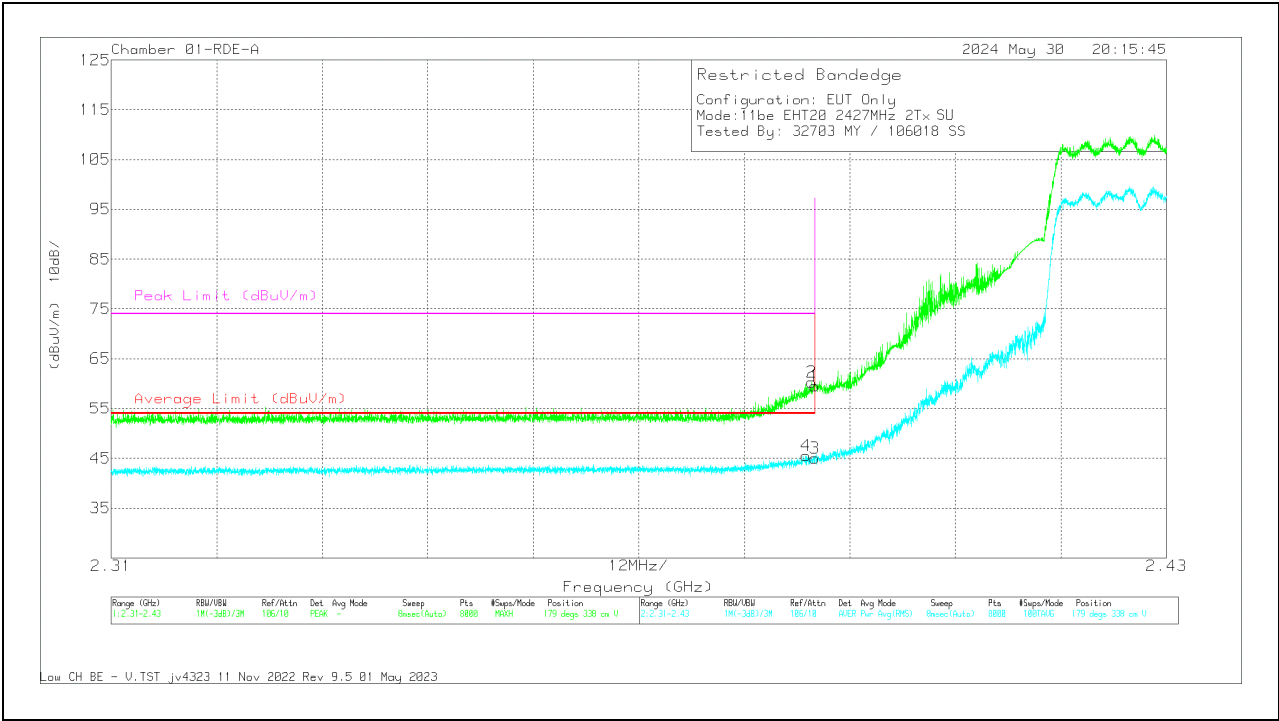


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.59	Pk	32.2	0	-18.3	59.49	-	-	74	-14.51	179	338	V
2	* 2.389646	46.44	Pk	32.2	0	-18.3	60.34	-	-	74	-13.66	179	338	V
3	* 2.39	30.65	RMS	32.2	.48	-18.3	45.03	54	-8.97	-	-	179	338	V
4	* 2.389001	31.19	RMS	32.2	.48	-18.3	45.57	54	-8.43	-	-	179	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 8)


HORIZONTAL RESULT

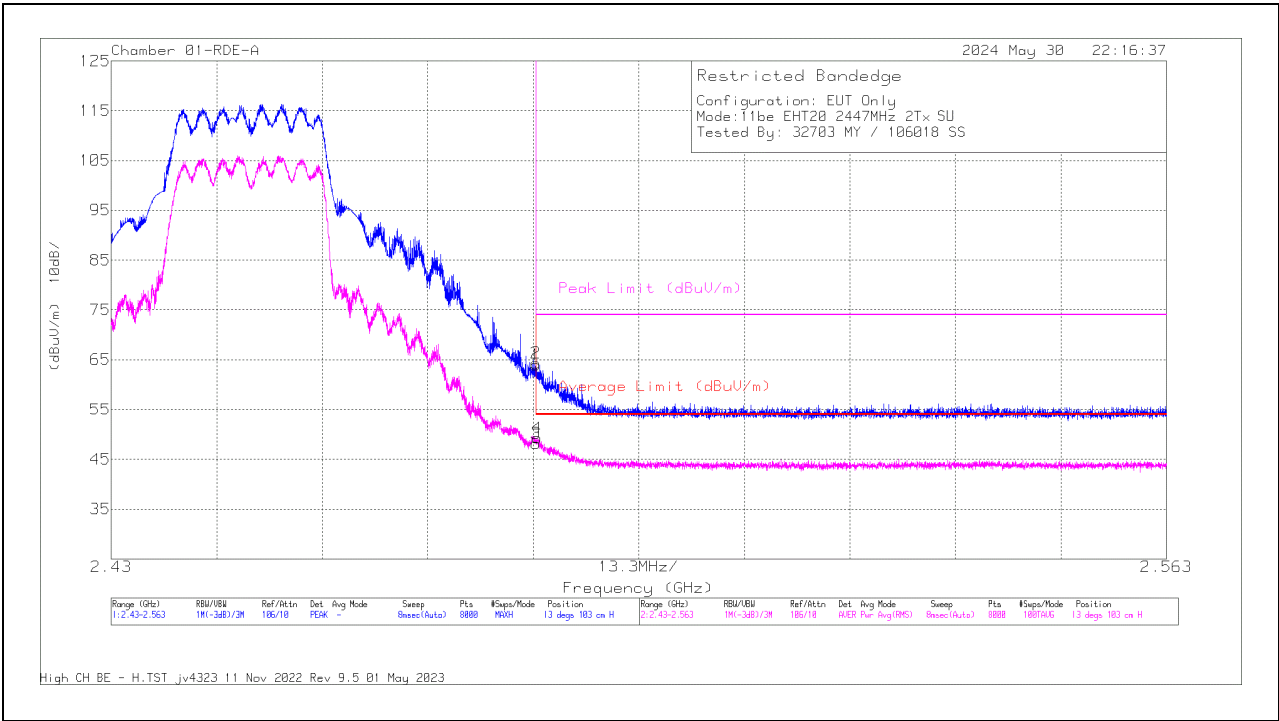

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.2	Pk	32.5	0	-17.8	63.9	-	-	74	-10.1	13	103	H
2	* 2.483506	49.67	Pk	32.5	0	-17.8	64.37	-	-	74	-9.63	13	103	H
3	* 2.4835	33.05	RMS	32.5	.48	-17.8	48.23	54	-5.77	-	-	13	103	H
4	* 2.483655	34.09	RMS	32.5	.48	-17.8	49.27	54	-4.73	-	-	13	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

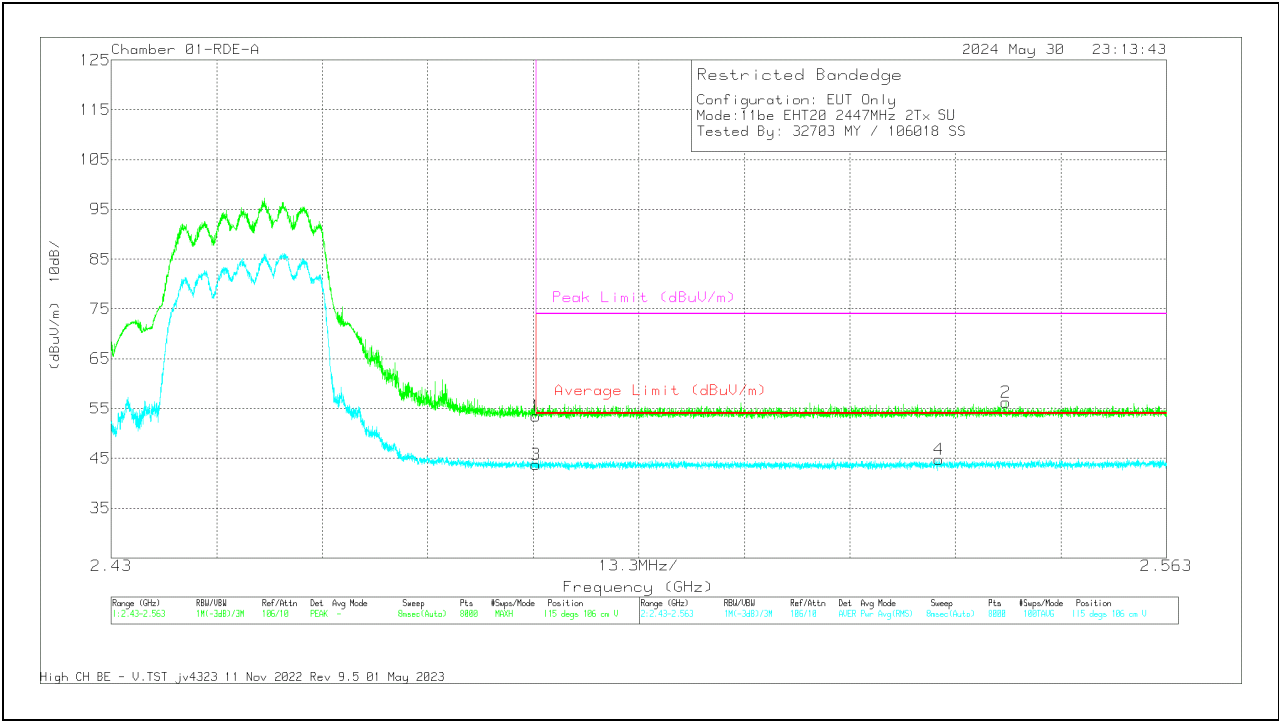


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	38.81	Pk	32.5	0	-17.8	53.51	-	-	74	-20.49	115	106	V
3	* 2.4835	28.57	RMS	32.5	.48	-17.8	43.75	54	-10.25	-	-	115	106	V
4	2.534334	29.31	RMS	32.5	.48	-17.5	44.79	54	-9.21	-	-	115	106	V
2	2.542781	41.23	Pk	32.5	0	-17.5	56.23	-	-	74	-17.77	115	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

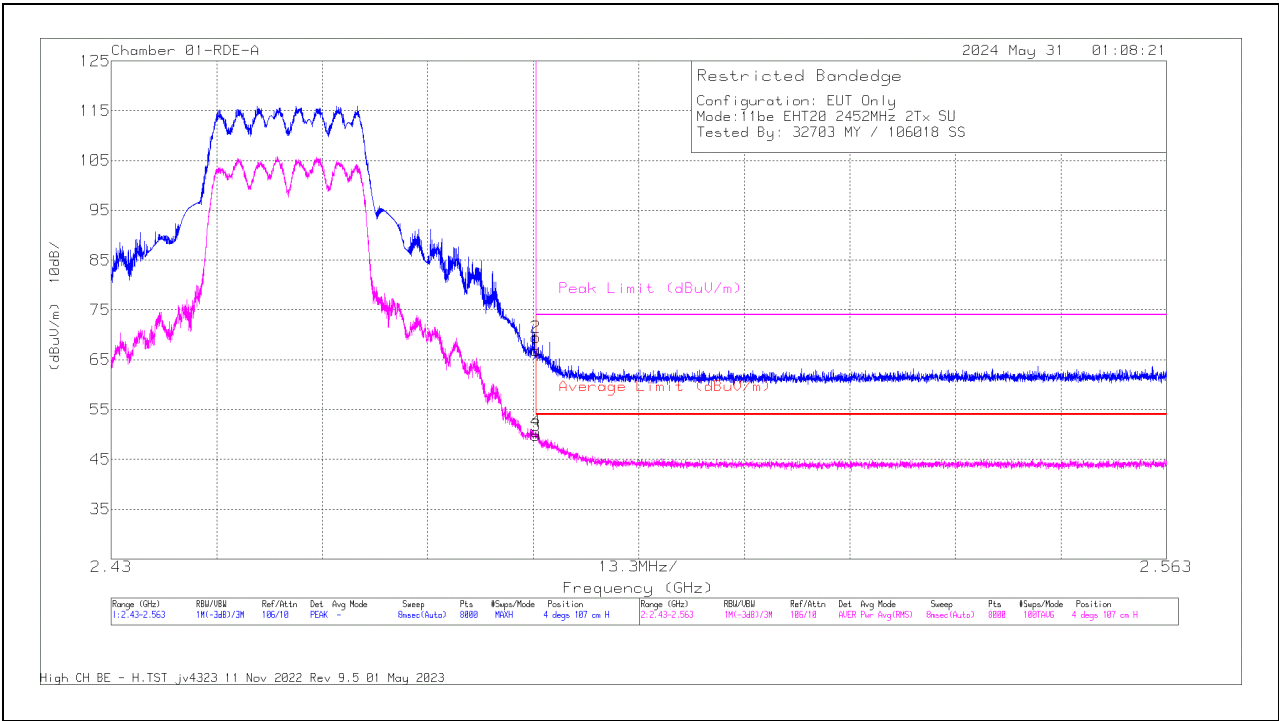

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.16	Pk	32.5	0	-17.8	66.86	-	-	74	-7.14	4	107	H
2	* 2.483539	54.8	Pk	32.5	0	-17.8	69.5	-	-	74	-4.5	4	107	H
3	* 2.4835	34.7	RMS	32.5	.48	-17.8	49.88	54	-4.12	-	-	4	107	H
4	* 2.483539	35.36	RMS	32.5	.48	-17.8	50.54	54	-3.46	-	-	4	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

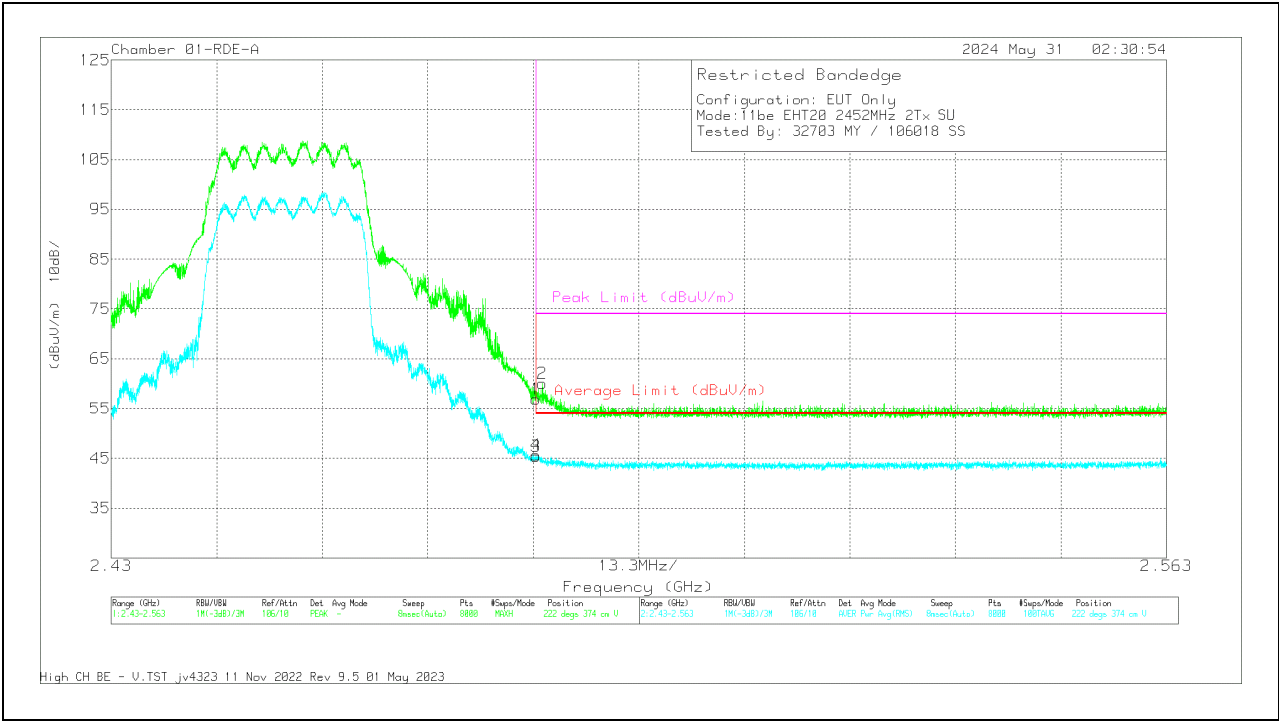


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.18	Pk	32.5	0	-17.8	56.88	-	-	74	-17.12	222	374	V
2	* 2.484337	45.37	Pk	32.5	0	-17.8	60.07	-	-	74	-13.93	222	374	V
3	* 2.4835	30.25	RMS	32.5	.48	-17.8	45.43	54	-8.57	-	-	222	374	V
4	* 2.483506	30.49	RMS	32.5	.48	-17.8	45.67	54	-8.33	-	-	222	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

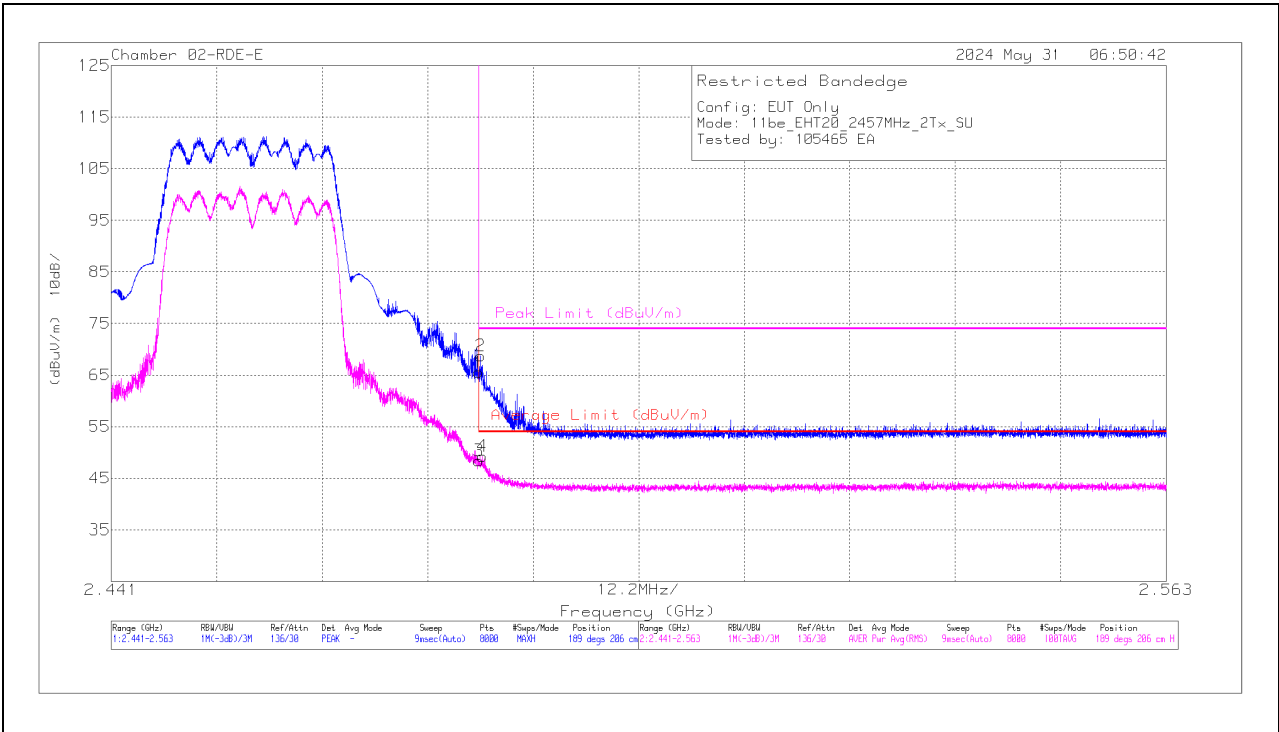

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 2.4835	72.39	Pk	32.3	0	-39.16	65.53	-	-	74	-8.47	189	206	H
2	* 2.483721	75.57	Pk	32.3	0	-39.15	68.72	-	-	74	-5.28	189	206	H
3	* 2.4835	54.76	RMS	32.3	.48	-39.16	48.38	54	-5.62	-	-	189	206	H
4	* 2.483919	55.62	RMS	32.3	.48	-39.15	49.25	54	-4.75	-	-	189	206	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

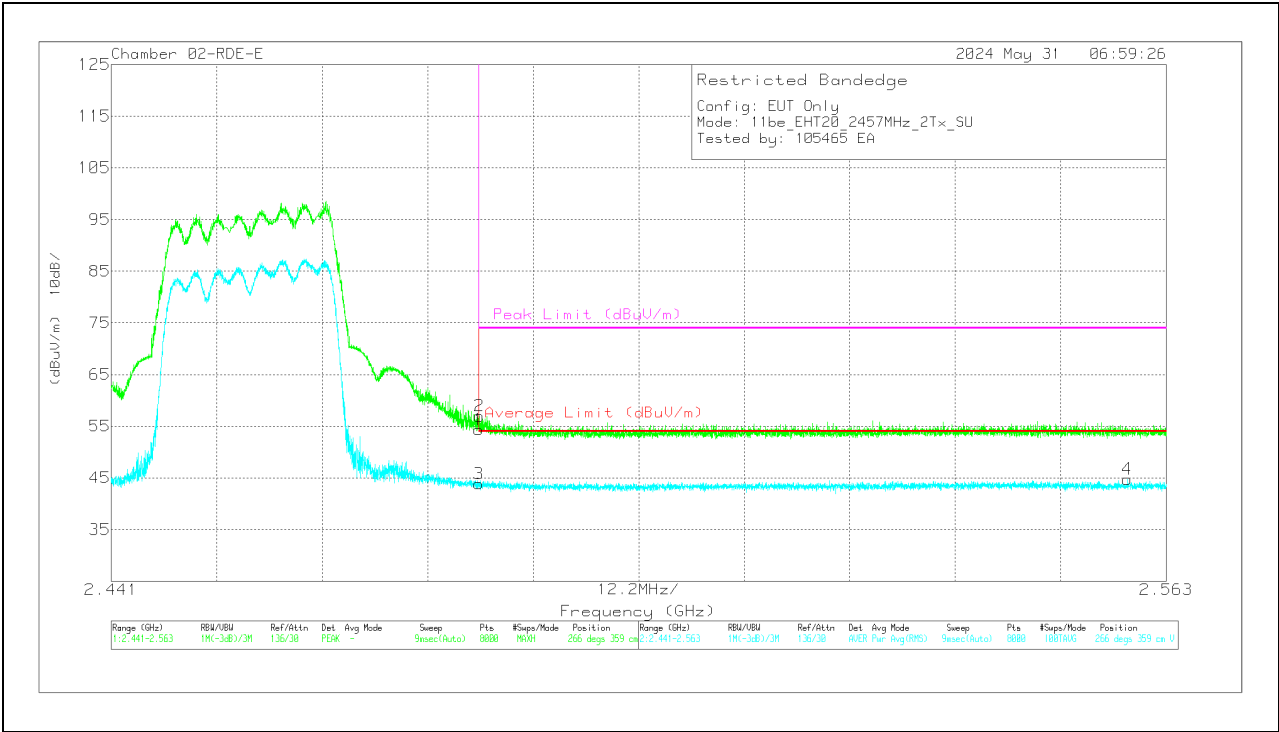


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.17	Pk	32.3	0	-39.16	54.31	-	-	74	-19.69	266	359	V
2	* 2.483568	63.82	Pk	32.3	0	-39.15	56.97	-	-	74	-17.03	266	359	V
3	* 2.4835	50.22	RMS	32.3	.48	-39.16	43.84	54	-10.16	-	-	266	359	V
4	2.558486	50.89	RMS	32.4	.48	-39.05	44.72	54	-9.28	-	-	266	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

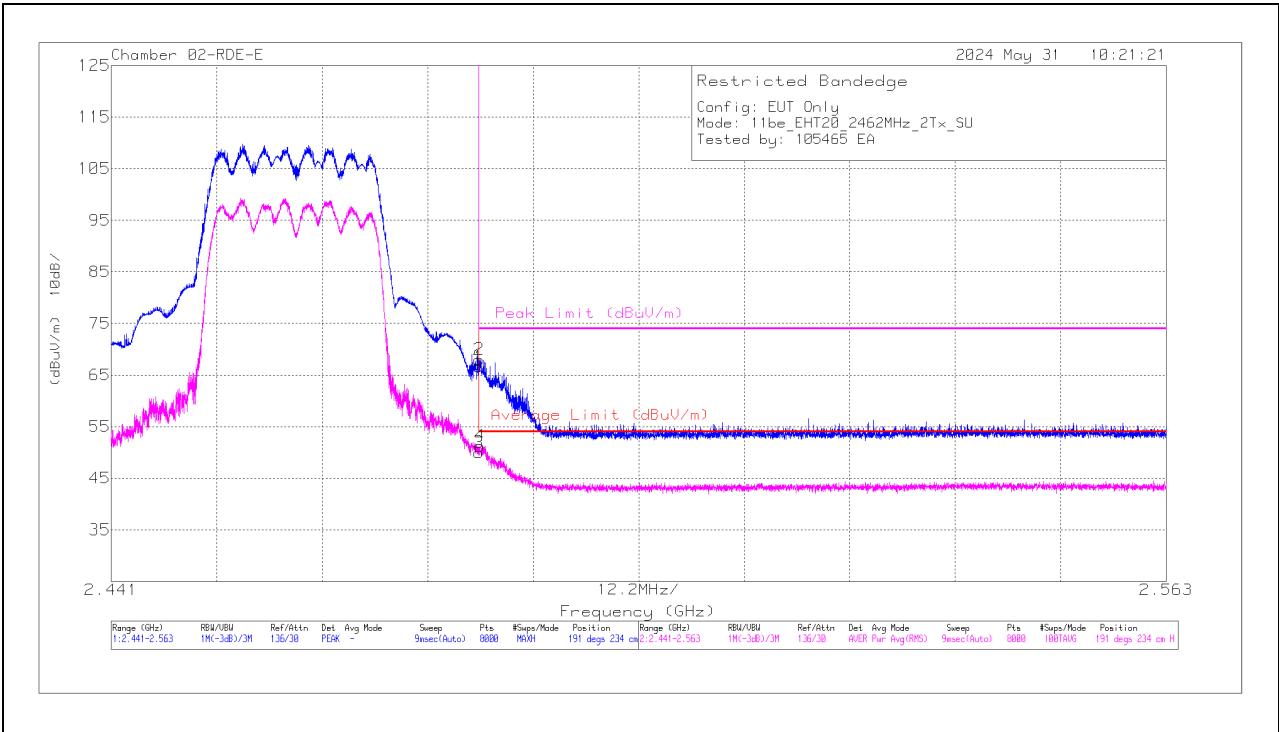

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.49	Pk	32.3	0	-39.16	66.63	-	-	74	-7.37	191	234	H
2	* 2.483538	74.88	Pk	32.3	0	-39.15	68.03	-	-	74	-5.97	191	234	H
3	* 2.4835	56.34	RMS	32.3	.48	-39.16	49.96	54	-4.04	-	-	191	234	H
4	* 2.483645	57.62	RMS	32.3	.48	-39.15	51.25	54	-2.75	-	-	191	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

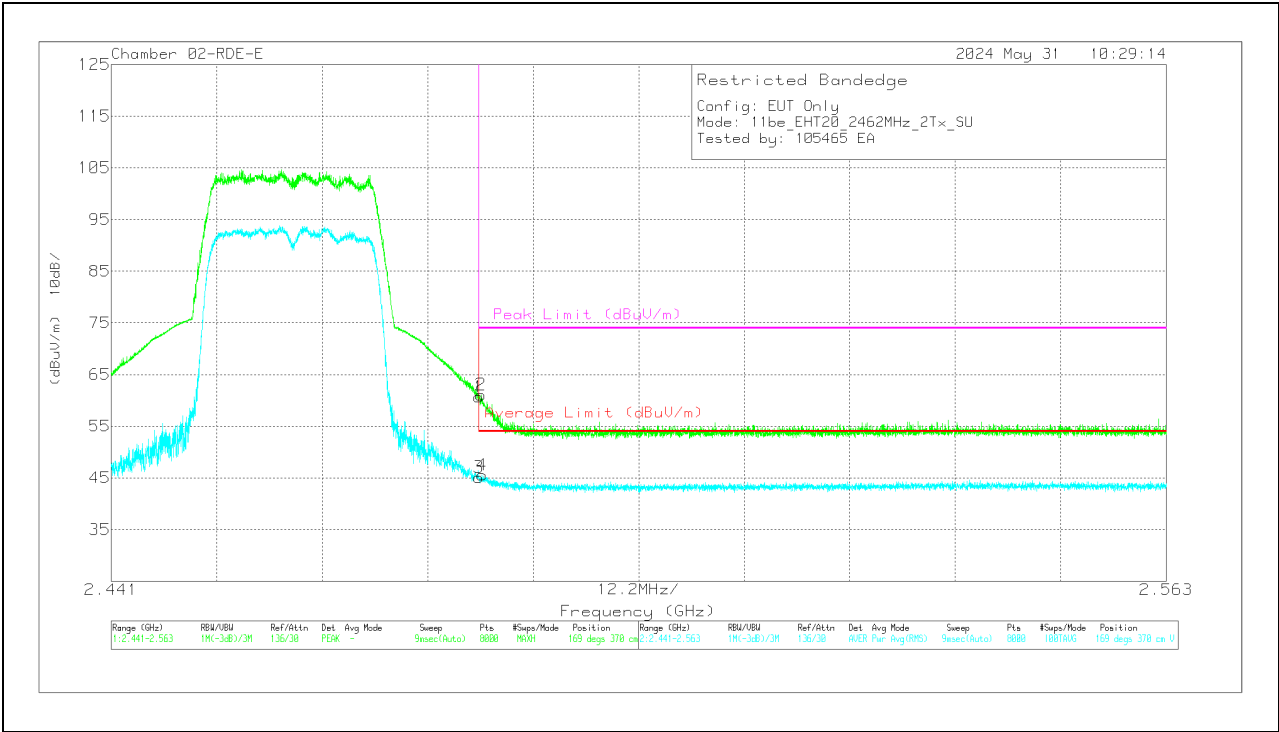


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	67.53	Pk	32.3	0	-39.16	60.67	-	-	74	-13.33	169	370	V
2	* 2.483751	67.92	Pk	32.3	0	-39.15	61.07	-	-	74	-12.93	169	370	V
3	* 2.4835	51.49	RMS	32.3	.48	-39.16	45.11	54	-8.89	-	-	169	370	V
4	* 2.483889	51.91	RMS	32.3	.48	-39.15	45.54	54	-8.46	-	-	169	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

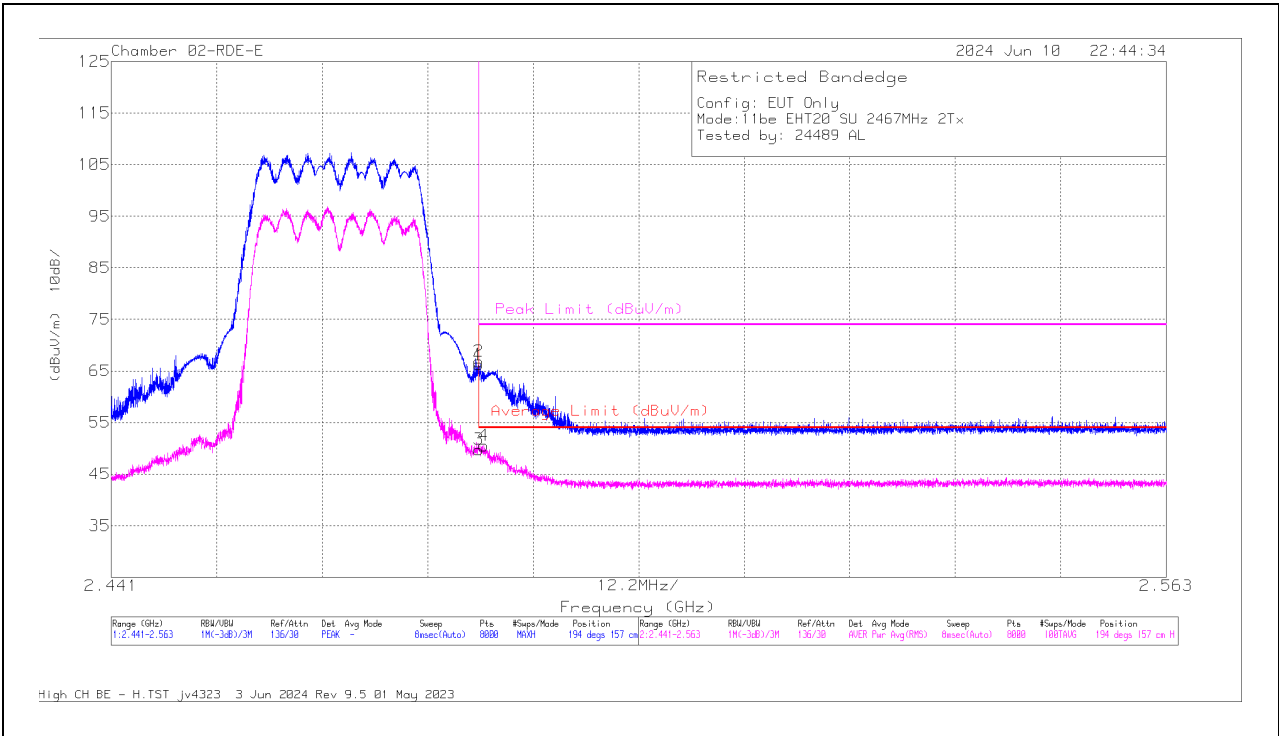

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.12	Pk	32.3	0	-39.16	66.26	-	-	74	-7.74	194	157	H
2	* 2.483523	73.7	Pk	32.3	0	-39.15	66.85	-	-	74	-7.15	194	157	H
3	* 2.4835	56.14	RMS	32.3	.48	-39.16	49.76	54	-4.24	-	-	194	157	H
4	* 2.484056	56.9	RMS	32.3	.48	-39.15	50.53	54	-3.47	-	-	194	157	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

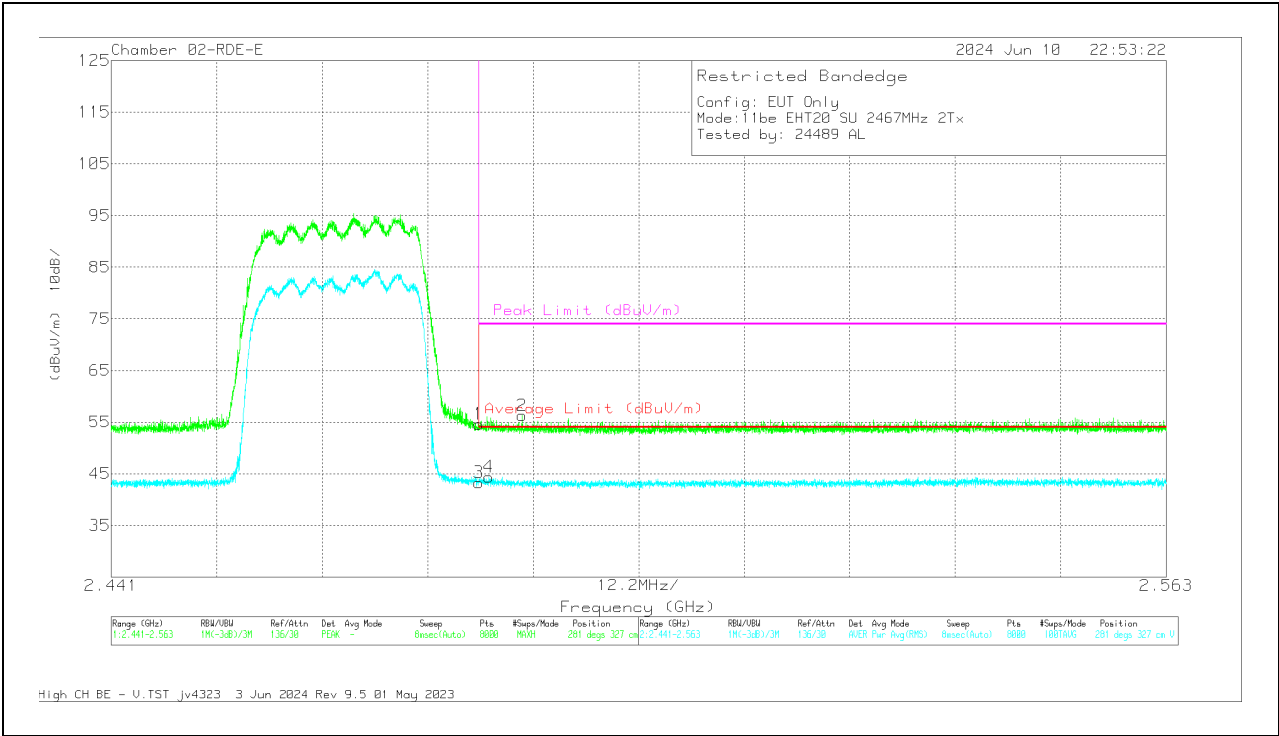


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.47	Pk	32.3	0	-39.16	54.61	-	-	74	-19.39	281	327	V
2	* 2.488525	63.09	Pk	32.3	0	-39.13	56.26	-	-	74	-17.74	281	327	V
3	* 2.4835	49.66	RMS	32.3	.48	-39.16	43.28	54	-10.72	-	-	281	327	V
4	* 2.484651	50.74	RMS	32.3	.48	-39.14	44.38	54	-9.62	-	-	281	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

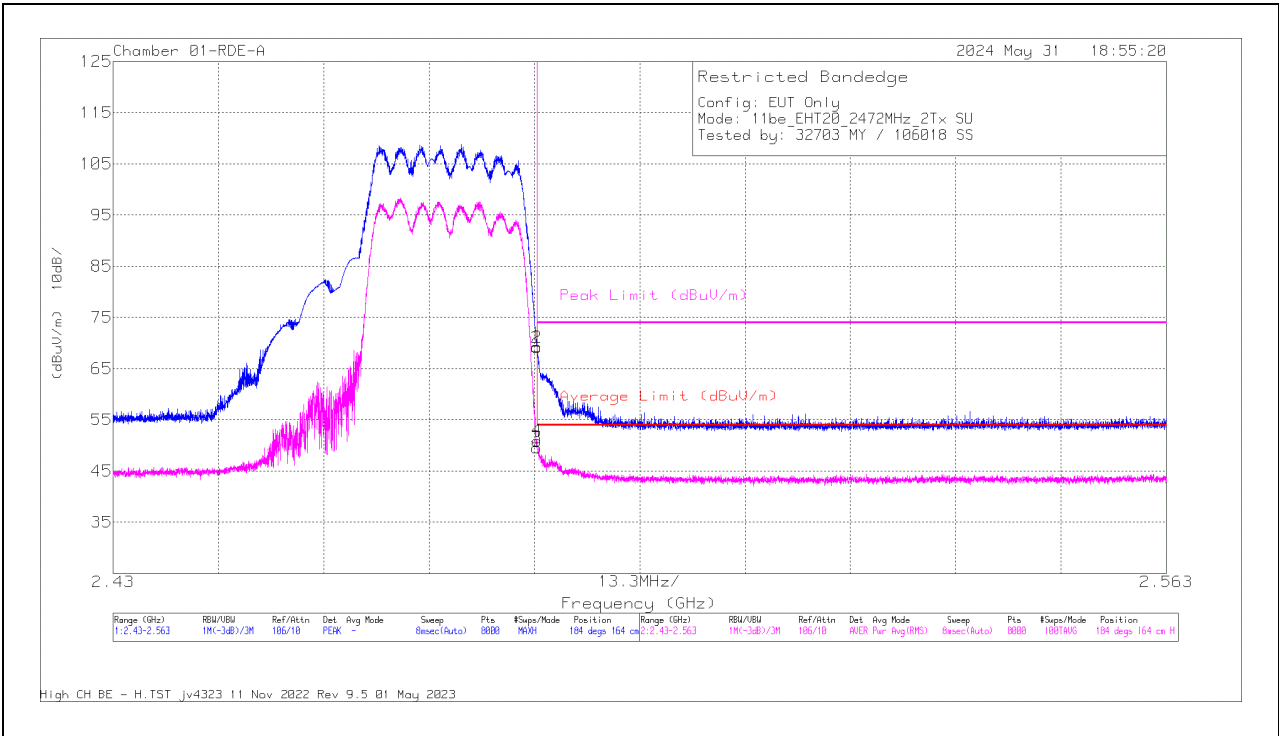

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.56	Pk	32.5	0	-17.8	69.26	-	-	74	-4.74	184	164	H
2	* 2.483506	54.42	Pk	32.5	0	-17.8	69.12	-	-	74	-4.88	184	164	H
3	* 2.4835	34.36	RMS	32.5	.48	-17.8	49.54	54	-4.46	-	-	184	164	H
4	* 2.483556	35.72	RMS	32.5	.48	-17.8	50.9	54	-3.1	-	-	184	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

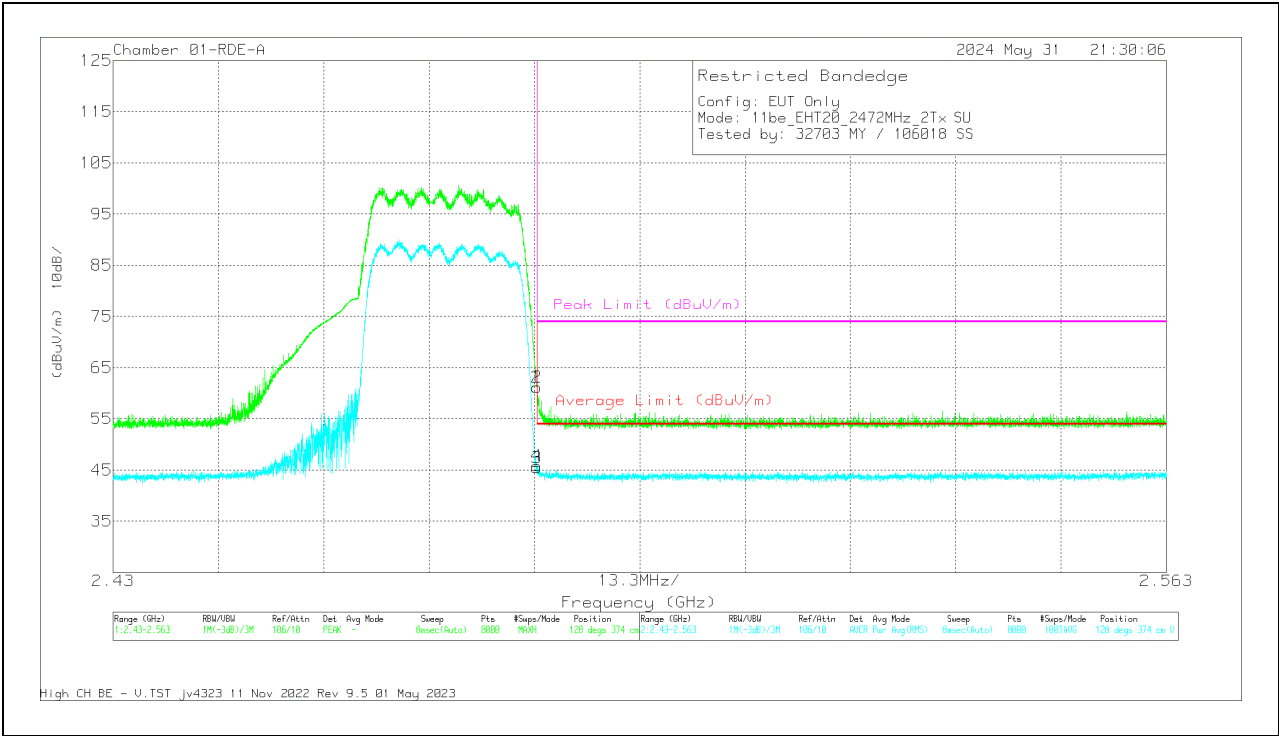


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	46.46	Pk	32.5	0	-17.8	61.16	-	-	74	-12.84	128	374	V
2	* 2.483506	46.46	Pk	32.5	0	-17.8	61.16	-	-	74	-12.84	128	374	V
3	* 2.4835	30.27	RMS	32.5	.48	-17.8	45.45	54	-8.55	-	-	128	374	V
4	* 2.483506	30.63	RMS	32.5	.48	-17.8	45.81	54	-8.19	-	-	128	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

ANT 4 + ANT 3 : 26-Tone RU, Index 0

BAND-EDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

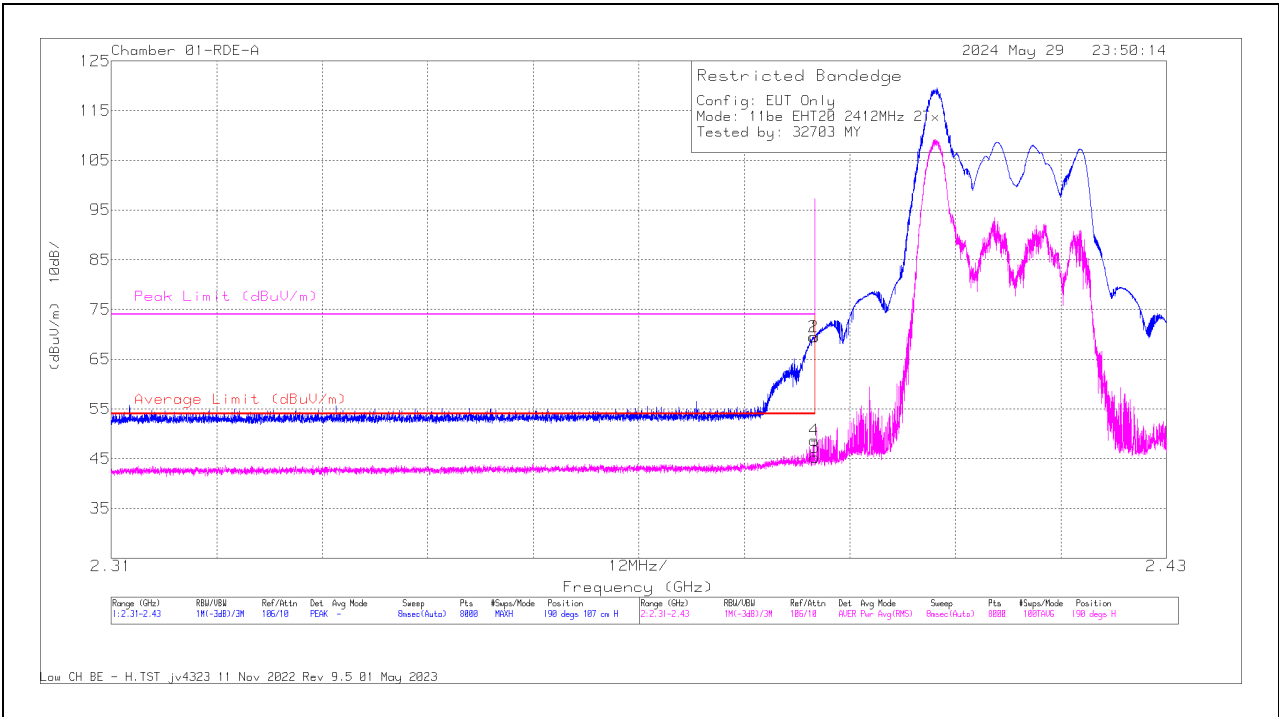

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.55	Pk	32.2	0	-18.3	69.45	-	-	74	-4.55	190	107	H
2	* 2.389841	55.56	Pk	32.2	0	-18.3	69.46	-	-	74	-4.54	190	107	H
3	* 2.39	30.79	RMS	32.2	.58	-18.3	45.27	54	-8.73	-	-	190	107	H
4	* 2.389931	34.25	RMS	32.2	.58	-18.3	48.73	54	-5.27	-	-	190	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

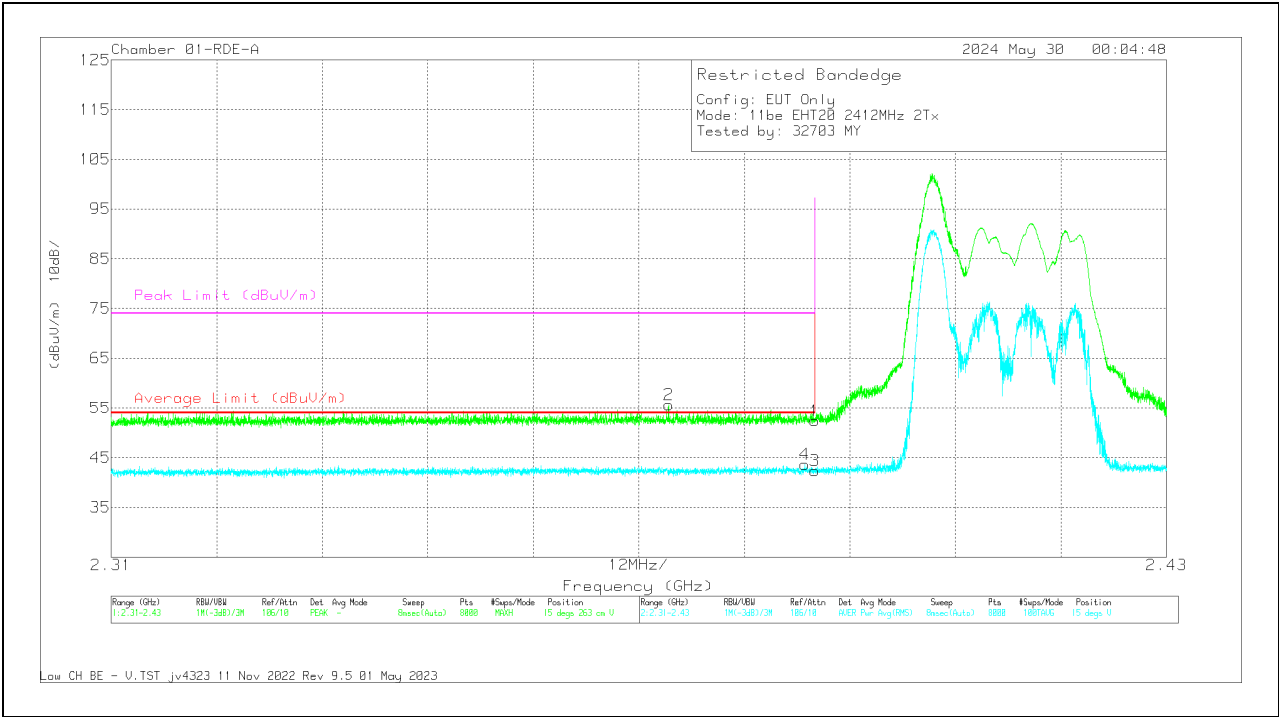


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.52	Pk	32.2	0	-18.3	52.42	-	-	74	-21.58	15	263	V
2	* 2.373383	41.79	Pk	32.1	0	-18.3	55.59	-	-	74	-18.41	15	263	V
3	* 2.39	27.89	RMS	32.2	.58	-18.3	42.37	54	-11.63	-	-	15	263	V
4	* 2.388866	29.13	RMS	32.2	.58	-18.31	43.6	54	-10.4	-	-	15	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

ANT 4 + ANT 3 : 26-Tone RU, Index 8

BAND-EDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

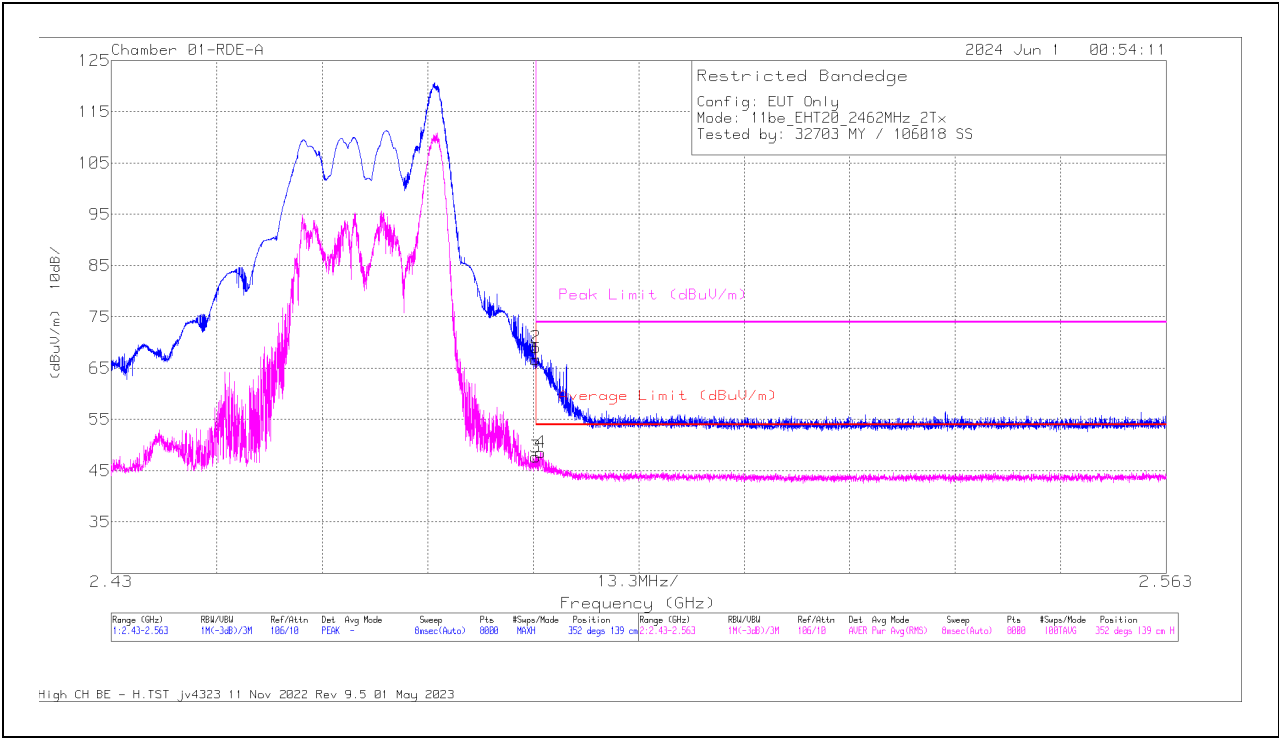

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.03	Pk	32.5	0	-17.8	66.73	-	-	74	-7.27	352	139	H
3	* 2.4835	32.42	RMS	32.5	.58	-17.8	47.7	54	-6.3	-	-	352	139	H
2	* 2.483556	54.37	Pk	32.5	0	-17.8	69.07	-	-	74	-4.93	352	139	H
4	* 2.484138	33.28	RMS	32.5	.58	-17.8	48.56	54	-5.44	-	-	352	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

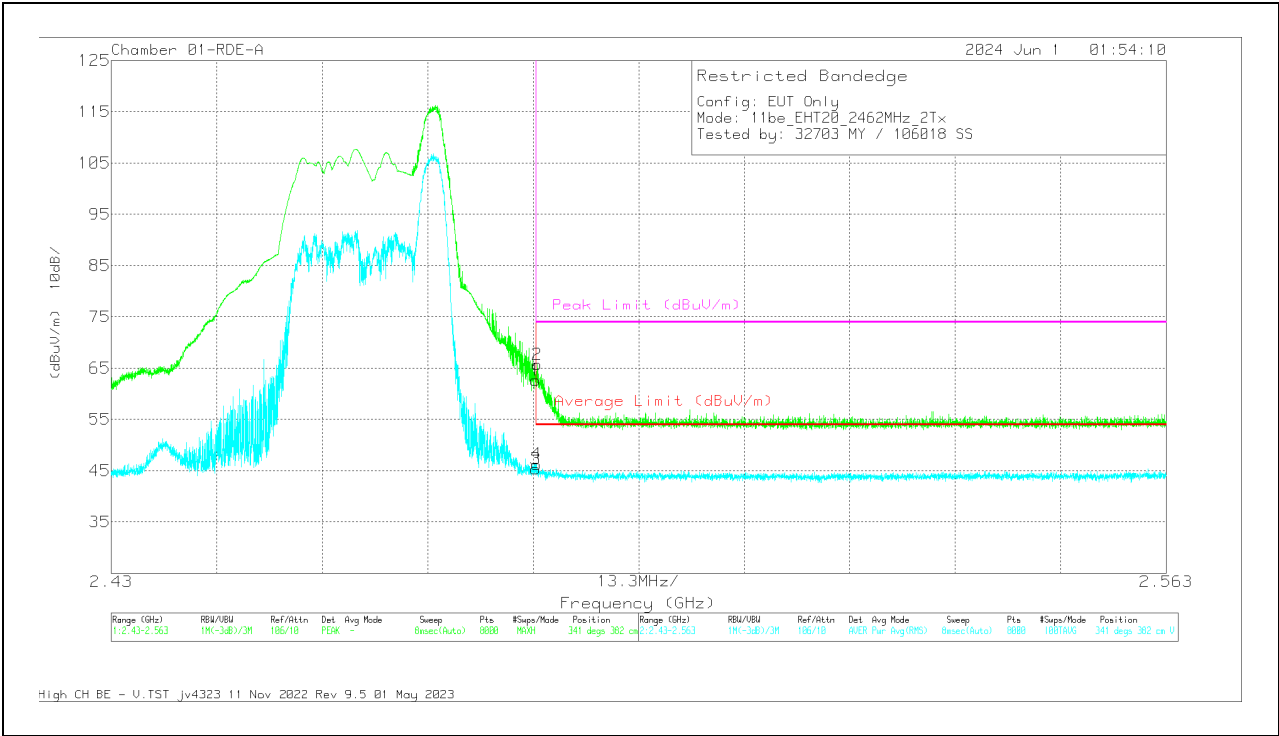


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81886 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	47.97	Pk	32.5	0	-17.8	62.67	-	-	74	-11.33	341	382	V
2	* 2.483689	50.99	Pk	32.5	0	-17.8	65.69	-	-	74	-8.31	341	382	V
3	* 2.4835	30.05	RMS	32.5	.58	-17.8	45.33	54	-8.67	-	-	341	382	V
4	* 2.483639	30.97	RMS	32.5	.58	-17.8	46.25	54	-7.75	-	-	341	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

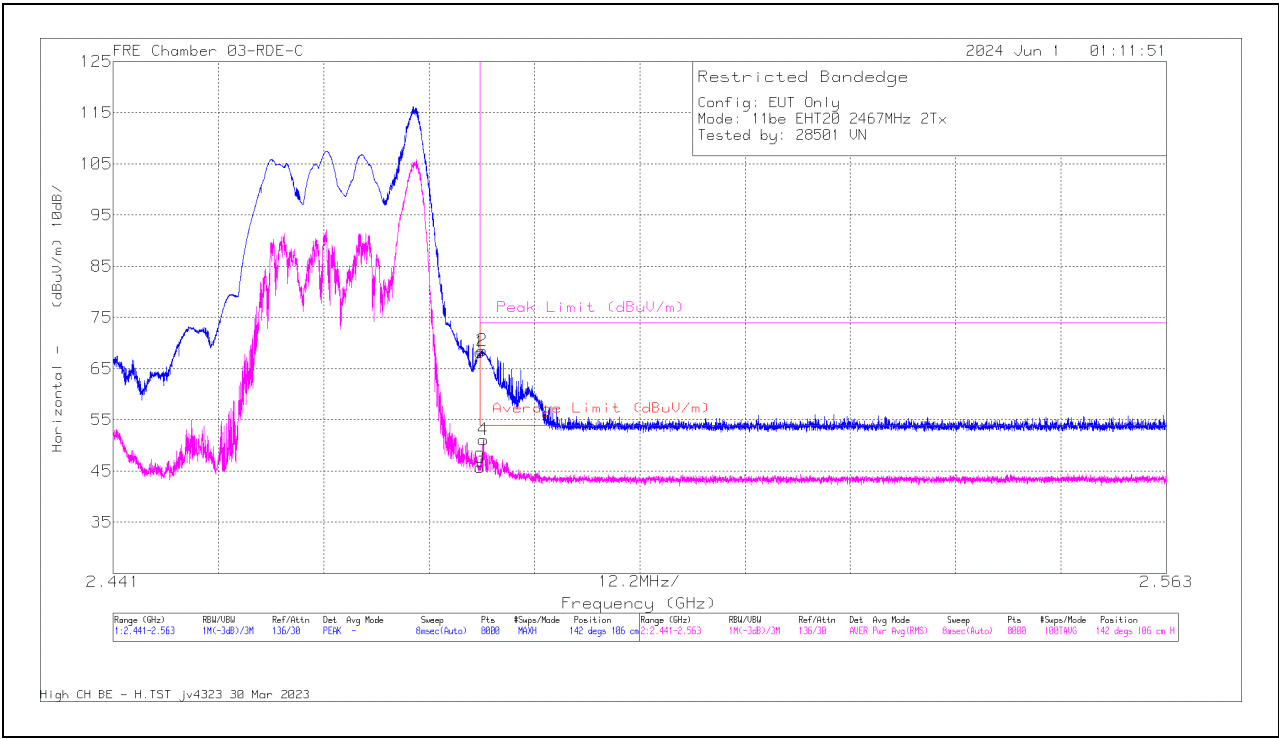

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223084 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.39	Pk	32.2	0	-39.4	68.19	-	-	74	-5.81	142	106	H
2	* 2.483751	75.74	Pk	32.2	0	-39.4	68.54	-	-	74	-5.46	142	106	H
3	* 2.4835	52.31	RMS	32.2	.58	-39.4	45.69	54	-8.31	-	-	142	106	H
4	* 2.483889	57.76	RMS	32.2	.58	-39.4	51.14	54	-2.86	-	-	142	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

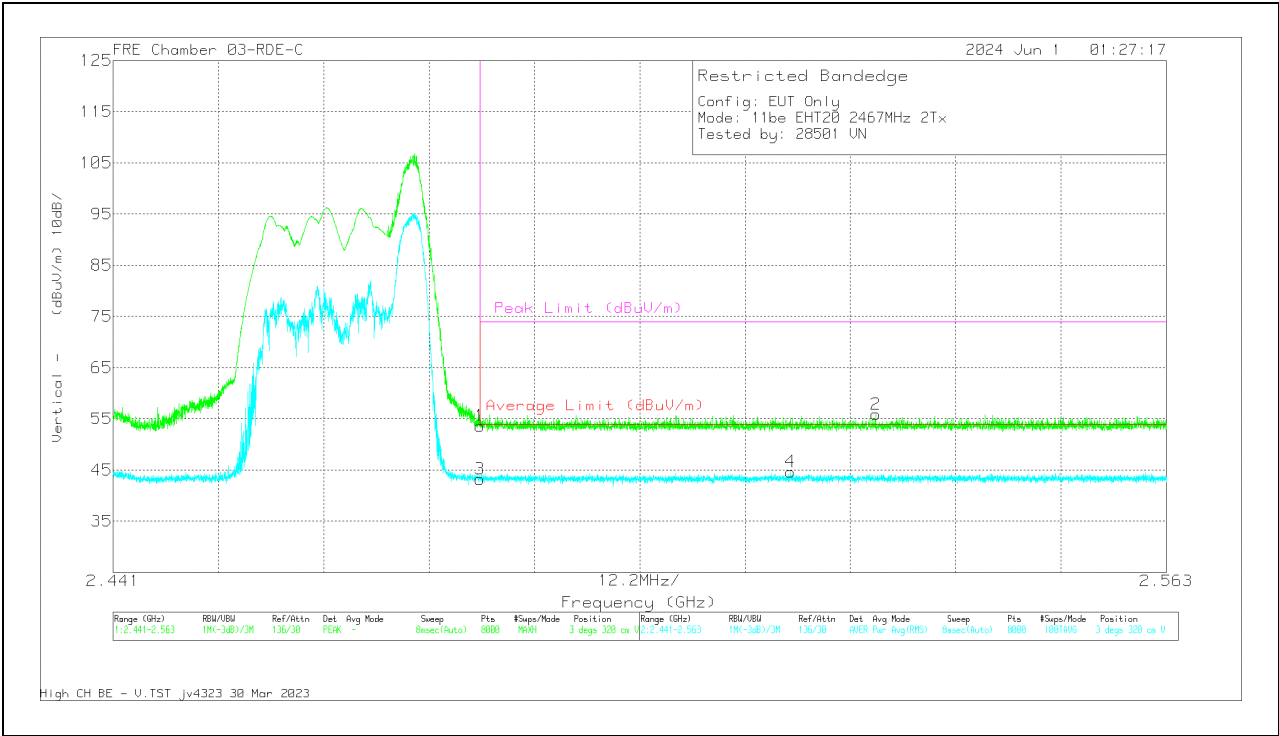


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223084 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.83	Pk	32.2	0	-39.4	53.63	-	-	74	-20.37	3	320	V
3	* 2.4835	49.84	RMS	32.2	.58	-39.4	43.22	54	-10.78	-	-	3	320	V
4	2.519441	51.06	RMS	32.2	.58	-39.2	44.64	54	-9.36	-	-	3	320	V
2	2.529324	62.87	Pk	32.2	0	-39.2	55.87	-	-	74	-18.13	3	320	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BAND-EDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

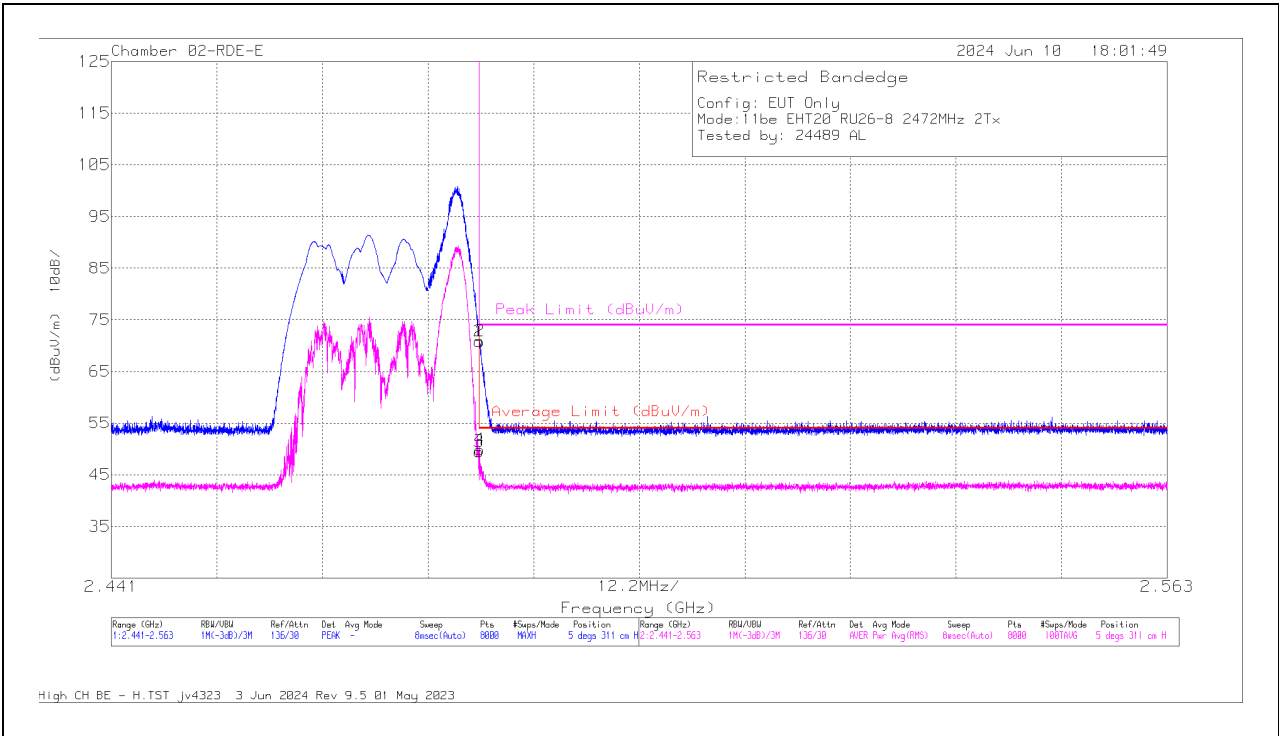

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	77.7	Pk	32.3	0	-39.16	70.84	-	-	74	-3.16	5	311	H
2	* 2.483538	77.7	Pk	32.3	0	-39.15	70.85	-	-	74	-3.15	5	311	H
3	* 2.4835	56.36	RMS	32.3	.58	-39.16	50.08	54	-3.92	-	-	5	311	H
4	* 2.483584	56.72	RMS	32.3	.58	-39.15	50.45	54	-3.55	-	-	5	311	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

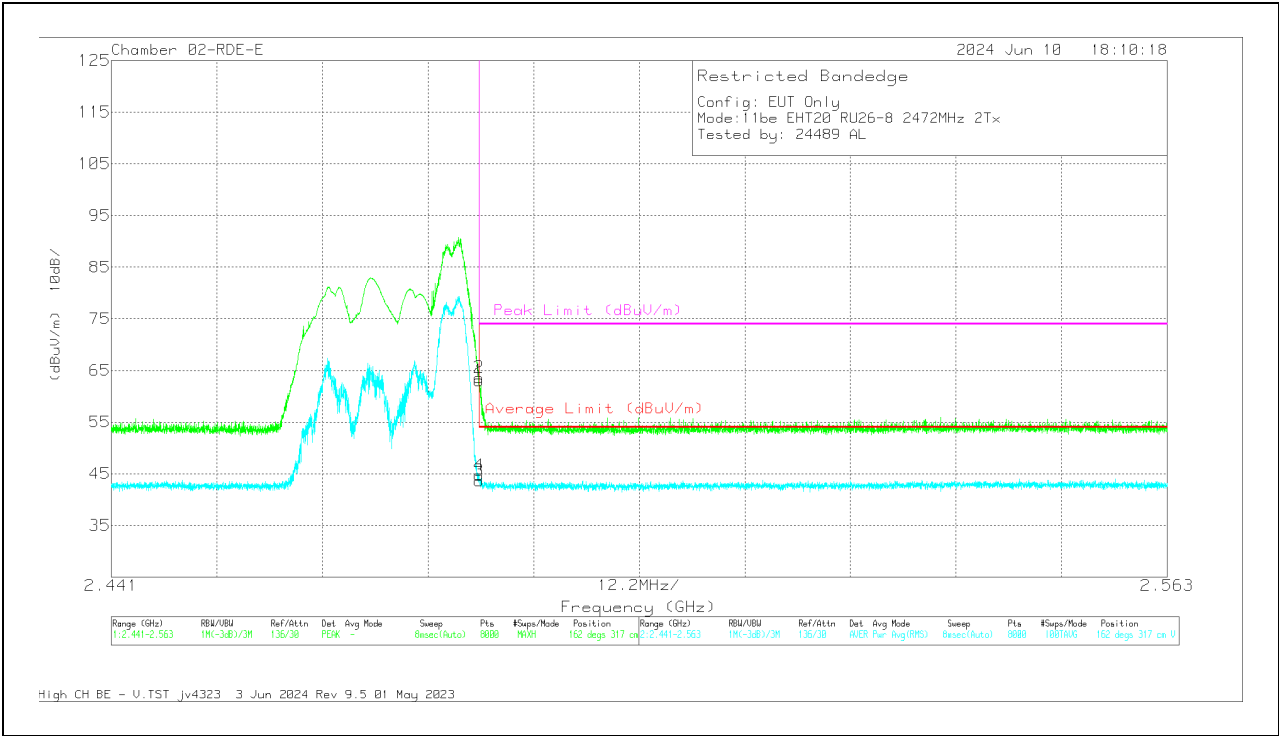



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206807 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	69.93	Pk	32.3	0	-39.16	63.07	-	-	74	-10.93	162	317	V
2	* 2.483507	70.46	Pk	32.3	0	-39.15	63.61	-	-	74	-10.39	162	317	V
3	* 2.4835	50.54	RMS	32.3	.58	-39.16	44.26	54	-9.74	-	-	162	317	V
4	* 2.483523	51.55	RMS	32.3	.58	-39.15	45.28	54	-8.72	-	-	162	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

10.1.8. 802.11be EHT20 MIMO MODE, HARMONICS AND SPURIOUS EMISSIONS

ANT 4 + ANT 3 : SU

LOW CHANNEL, CH 1 RESULTS

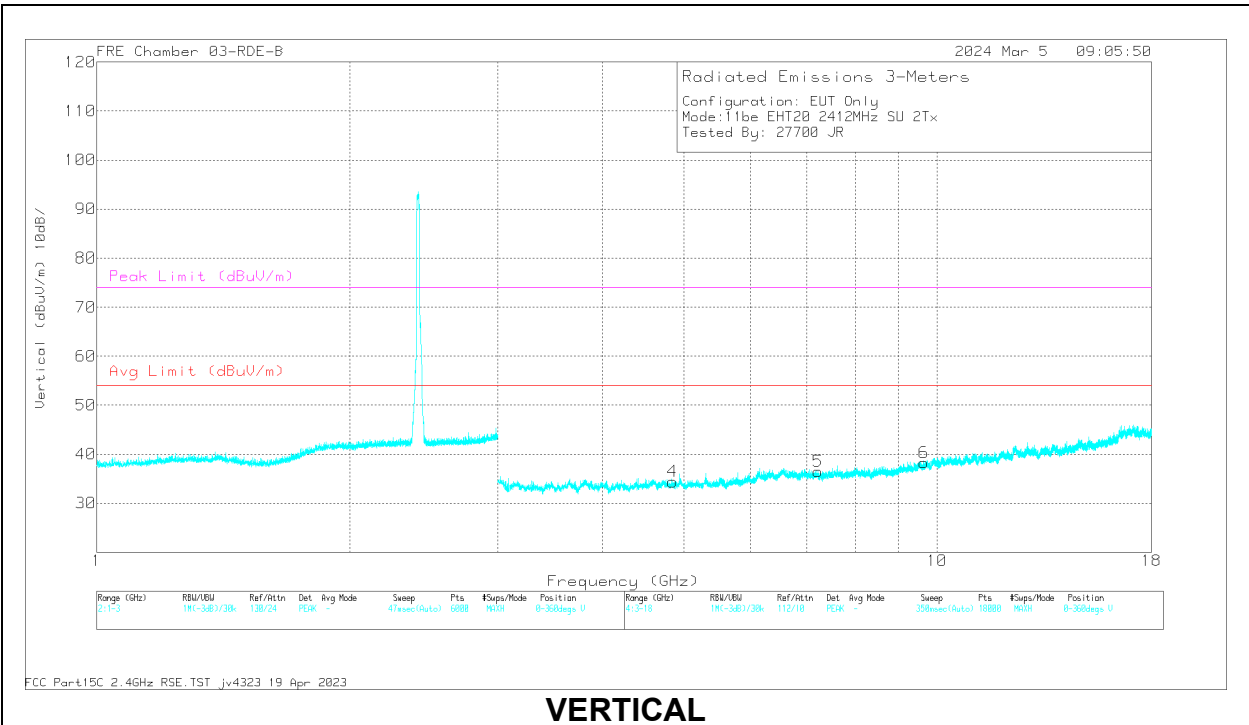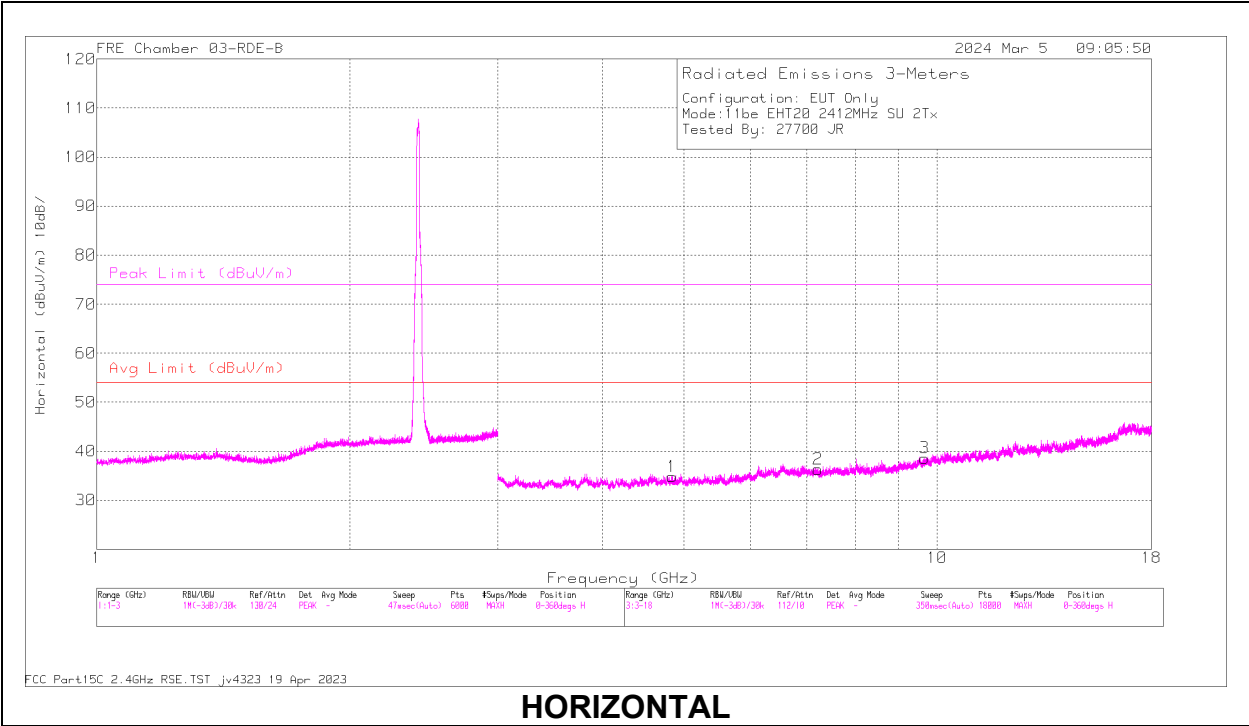

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.841046	59.35	PK2	34.2	0	-49.2	44.35	-	-	74	-29.65	2	144	H
	* 4.842527	47.93	MAv1	34.2	0	-49.25	32.88	54	-21.12	-	-	2	144	H
4	* 4.8457	59.57	PK2	34.2	0	-49.2	44.57	-	-	74	-29.43	15	241	V
	* 4.845619	48.11	MAv1	34.2	0	-49.2	33.11	54	-20.89	-	-	15	241	V
5	7.214545	57.92	PK2	35.8	0	-47.5	46.22	-	-	-	-	99	299	V
	7.213796	46.44	MAv1	35.8	0	-47.5	34.74	-	-	-	-	99	299	V
2	7.217955	58.01	PK2	35.8	0	-47.6	46.21	-	-	-	-	133	313	H
	7.218616	46.5	MAv1	35.8	0	-47.66	34.64	-	-	-	-	133	313	H
6	9.65365	58.6	PK2	37.1	0	-47.67	48.03	-	-	-	-	253	341	V
	9.653548	47.13	MAv1	37.1	0	-47.65	36.58	-	-	-	-	253	341	V
3	9.666125	58.97	PK2	37.1	0	-47.6	48.47	-	-	-	-	167	200	H
	9.664891	47.06	MAv1	37.1	0	-47.5	36.66	-	-	-	-	167	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

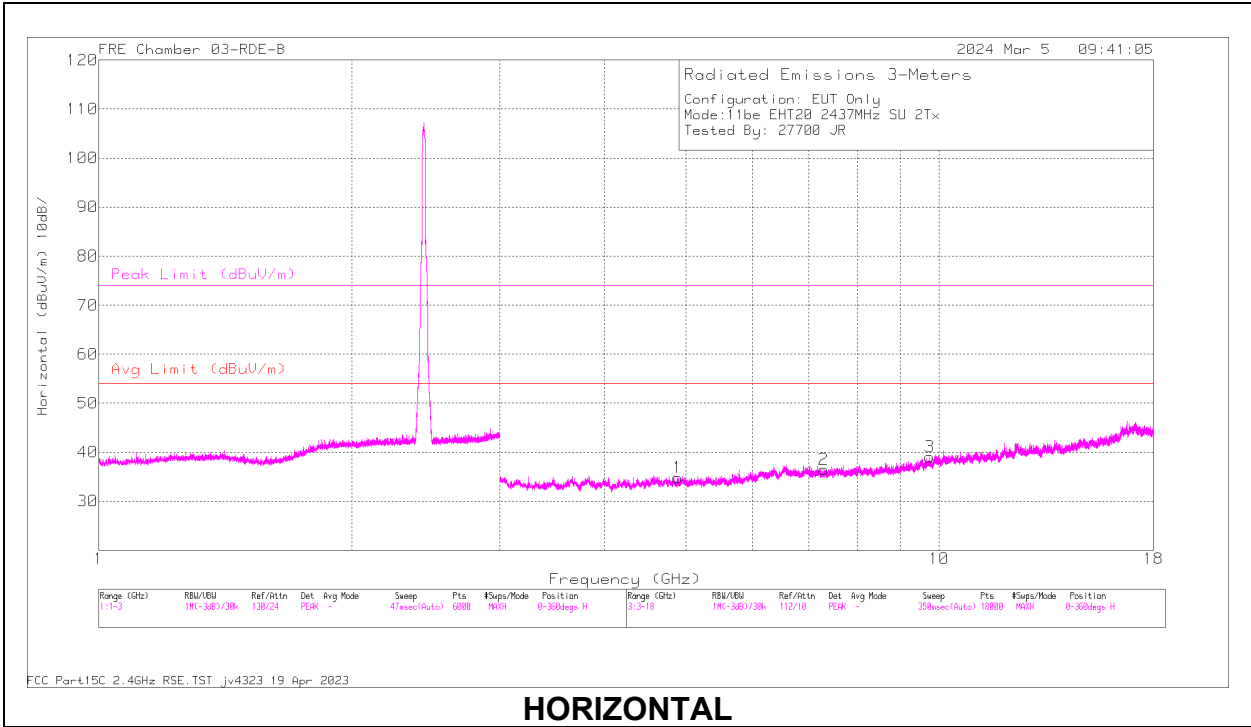

HORIZONTAL

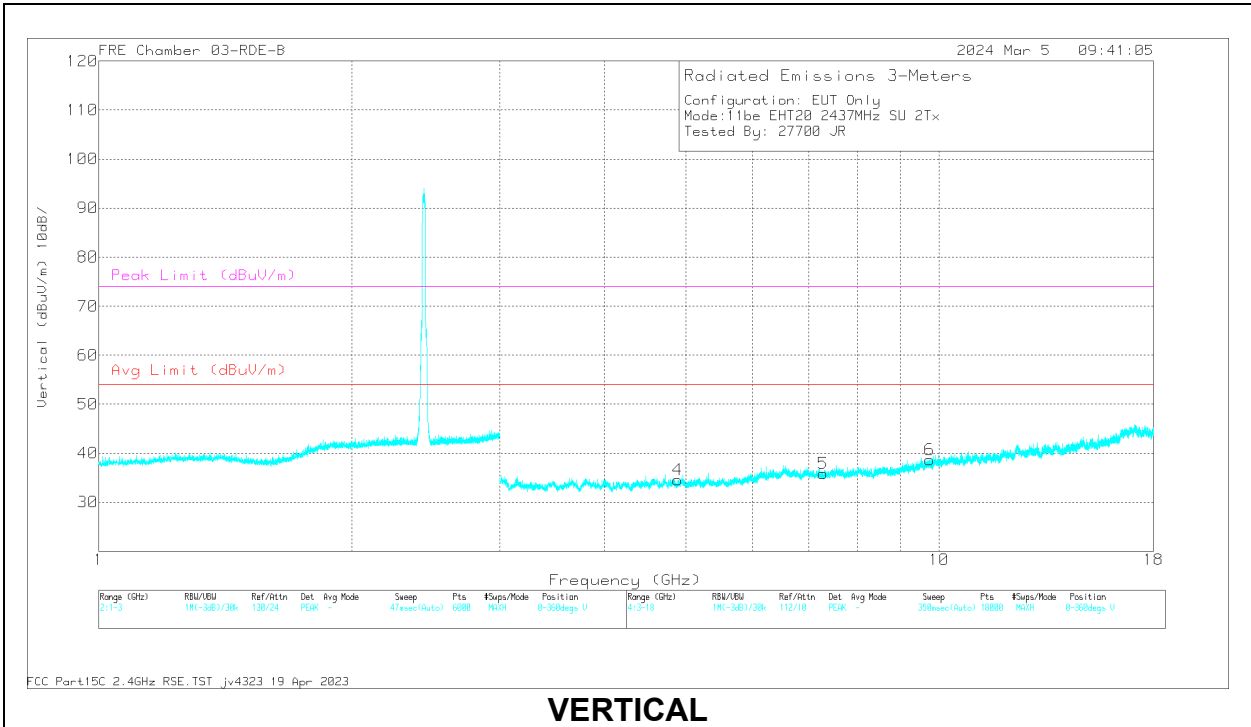

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.887756	59.86	PK2	34.1	0	-49.2	44.76	-	-	74	-29.24	360	200	H
	* 4.887174	47.84	MAv1	34.1	0	-49.2	32.74	54	-21.26	-	-	360	200	H
2	* 7.290149	58.84	PK2	35.8	0	-48	46.64	-	-	74	-27.36	351	105	H
	* 7.289367	46.45	MAv1	35.8	0	-48	34.25	54	-19.75	-	-	351	105	H
4	* 4.888805	59.29	PK2	34.1	0	-49.28	44.11	-	-	74	-29.89	268	181	V
	* 4.889128	47.71	MAv1	34.1	0	-49.3	32.51	54	-21.49	-	-	268	181	V
5	* 7.280703	58.08	PK2	35.8	0	-48	45.88	-	-	74	-28.12	97	149	V
	* 7.279502	46.89	MAv1	35.8	0	-48	34.69	54	-19.31	-	-	97	149	V
3	9.752178	59.15	PK2	37.3	0	-47.9	48.55	-	-	-	-	178	267	H
	9.750078	47.54	MAv1	37.3	0	-47.9	36.94	-	-	-	-	178	267	H
6	9.754937	59.21	PK2	37.3	0	-47.9	48.61	-	-	-	-	65	268	V
	9.754441	47.72	MAv1	37.3	0	-47.9	37.12	-	-	-	-	65	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

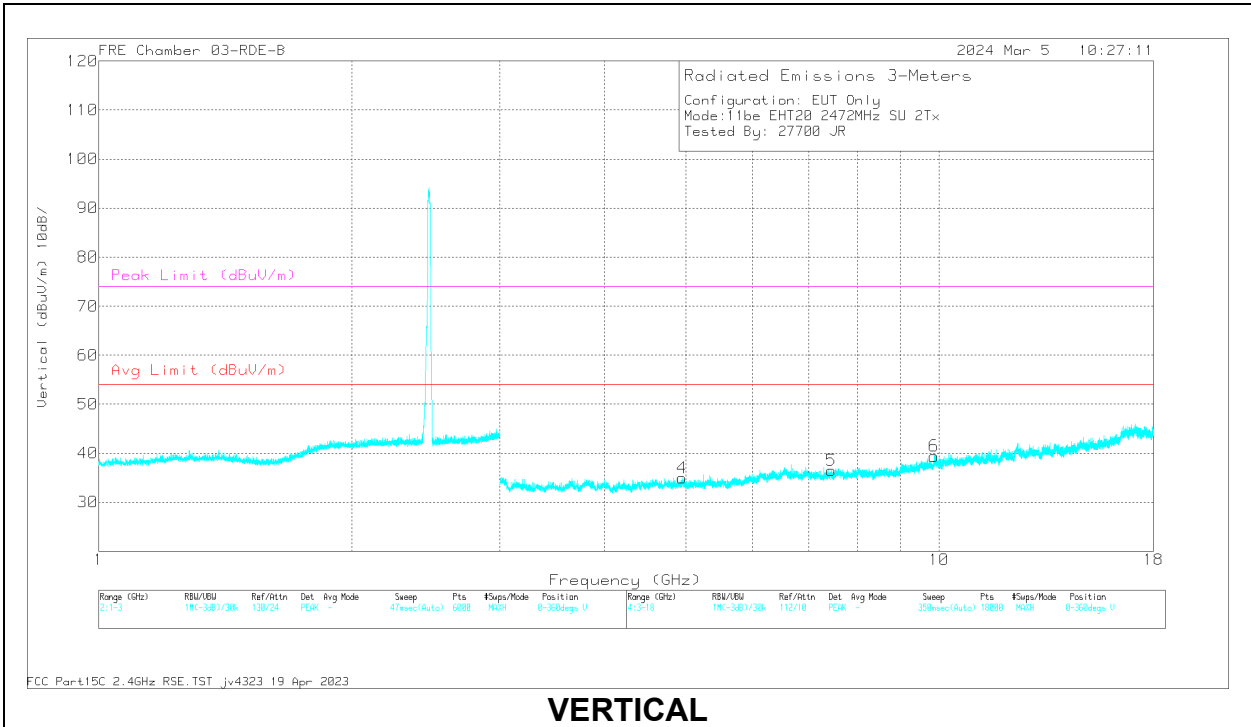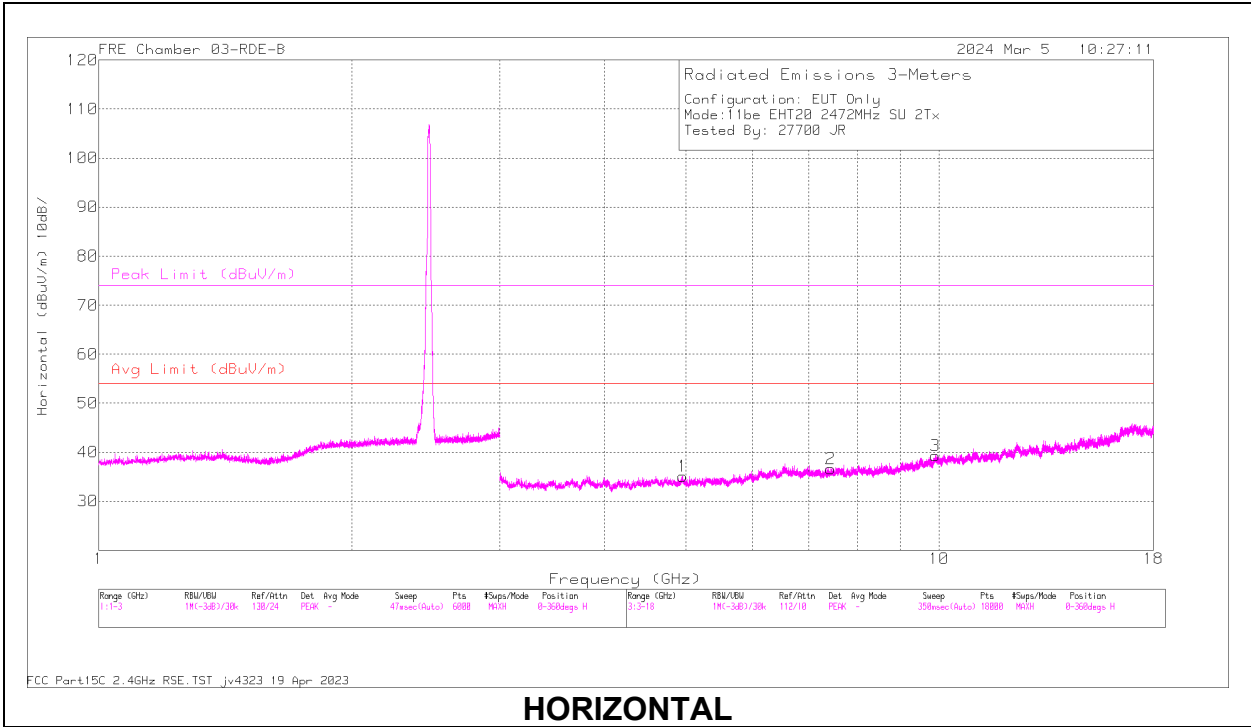

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.955081	60.42	PK2	34.2	0	-49.5	45.12	-	-	74	-28.88	38	245	H
	* 4.953923	48.65	MAv1	34.2	0	-49.5	33.35	54	-20.65	-	-	38	245	H
2	* 7.428103	58.45	PK2	35.9	0	-47.9	46.45	-	-	74	-27.55	295	320	H
	* 7.429772	47.07	MAv1	35.9	0	-47.82	35.15	54	-18.85	-	-	295	320	H
4	* 4.952	60.26	PK2	34.2	0	-49.5	44.96	-	-	74	-29.04	250	384	V
	* 4.95147	48.59	MAv1	34.2	0	-49.5	33.29	54	-20.71	-	-	250	384	V
5	* 7.439273	58.61	PK2	35.9	0	-47.9	46.61	-	-	74	-27.39	205	148	V
	* 7.442513	46.79	MAv1	35.9	0	-47.9	34.79	54	-19.21	-	-	205	148	V
6	9.868011	59.46	PK2	37.4	0	-48.2	48.66	-	-	-	-	332	349	V
	9.868784	48.08	MAv1	37.4	0	-48.12	37.36	-	-	-	-	332	349	V
3	9.896889	59.82	PK2	37.4	0	-48.2	49.02	-	-	-	-	49	320	H
	9.897825	48.42	MAv1	37.4	0	-48.2	37.62	-	-	-	-	49	320	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

ANT 4 + ANT 3 : 26-Tone RU, Index 0

LOW CHANNEL, CH 1 RESULTS

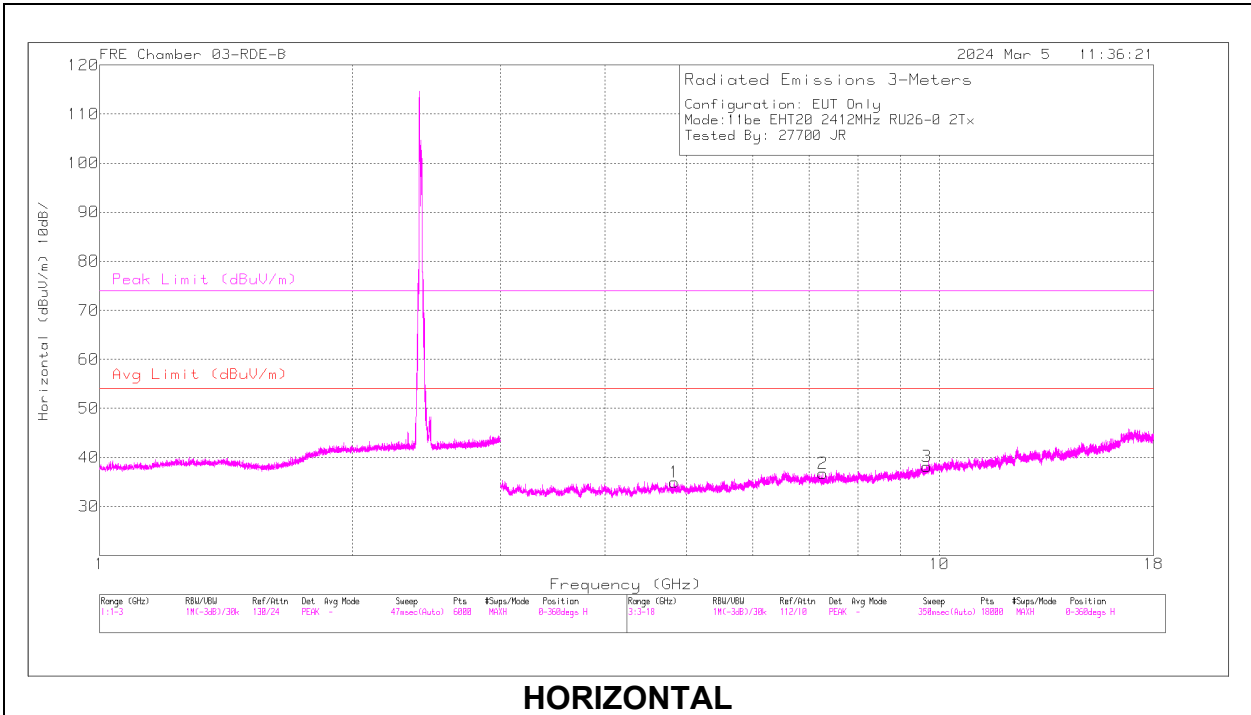

HORIZONTAL

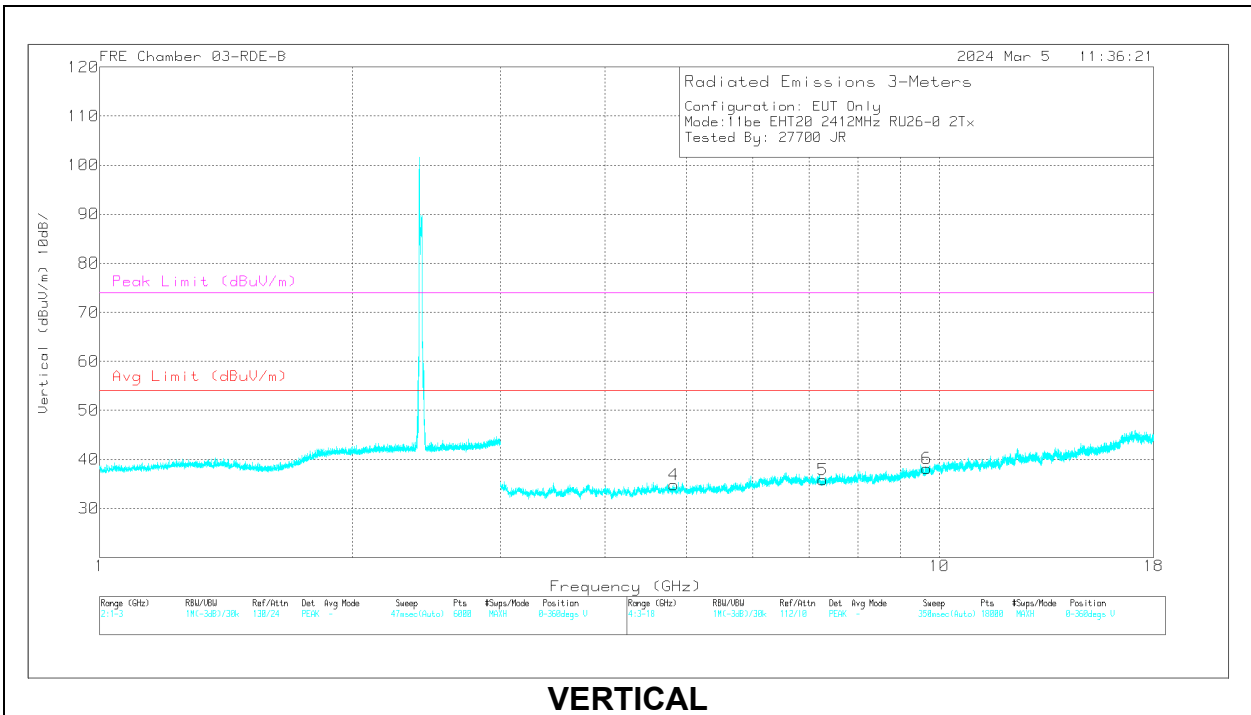

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.84037	59.62	PK2	34.2	0	-49.2	44.62	-	-	74	-29.38	360	101	H
	* 4.840815	47.91	MAv1	34.2	0	-49.2	32.91	54	-21.09	-	-	360	101	H
2	* 7.265756	57.63	PK2	35.7	0	-47.9	45.43	-	-	74	-28.57	63	196	H
	* 7.267597	46.54	MAv1	35.7	0	-47.9	34.34	54	-19.66	-	-	63	196	H
4	* 4.8298	59.63	PK2	34.2	0	-49.22	44.61	-	-	74	-29.39	257	364	V
	* 4.829527	48.08	MAv1	34.2	0	-49.25	33.03	54	-20.97	-	-	257	364	V
5	* 7.263393	58.55	PK2	35.7	0	-47.9	46.35	-	-	74	-27.65	228	294	V
	* 7.265395	46.62	MAv1	35.7	0	-47.9	34.42	54	-19.58	-	-	228	294	V
3	9.658208	58.7	PK2	37.1	0	-47.58	48.22	-	-	-	-	224	123	H
	9.659099	47.07	MAv1	37.1	0	-47.5	36.67	-	-	-	-	224	123	H
6	9.667066	58.74	PK2	37.1	0	-47.61	48.23	-	-	-	-	238	286	V
	9.665251	47.42	MAv1	37.1	0	-47.53	36.99	-	-	-	-	238	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

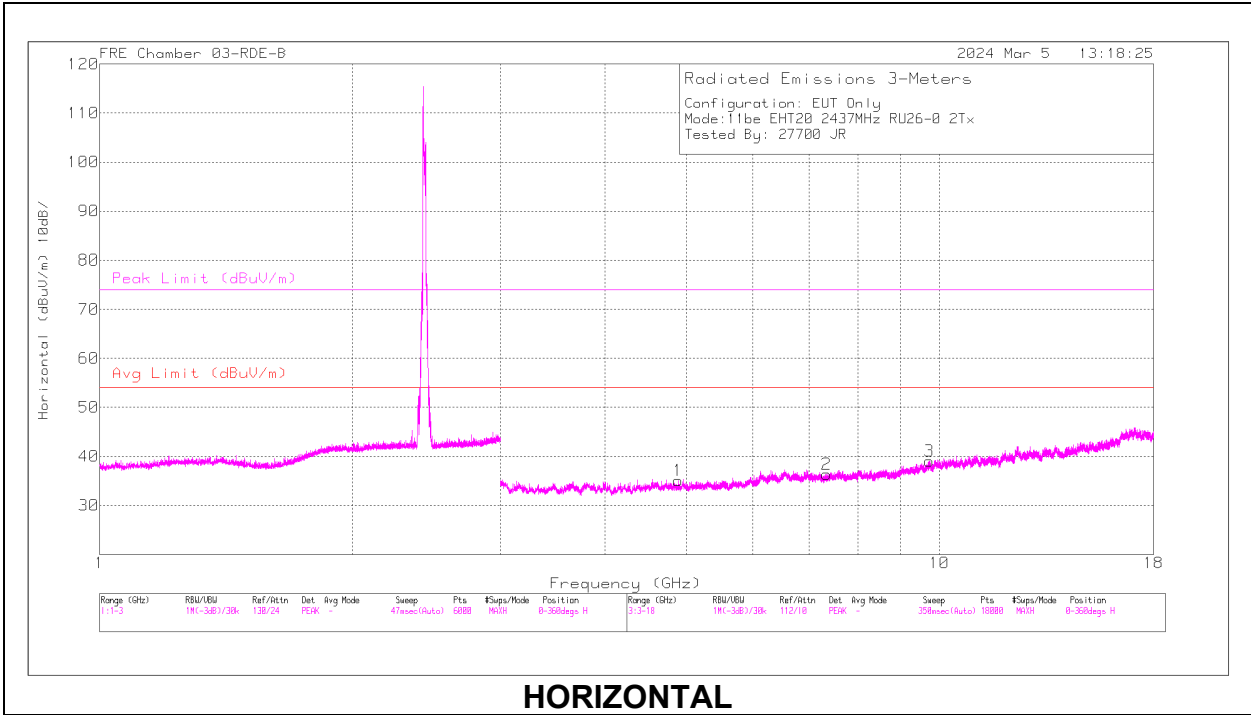

HORIZONTAL

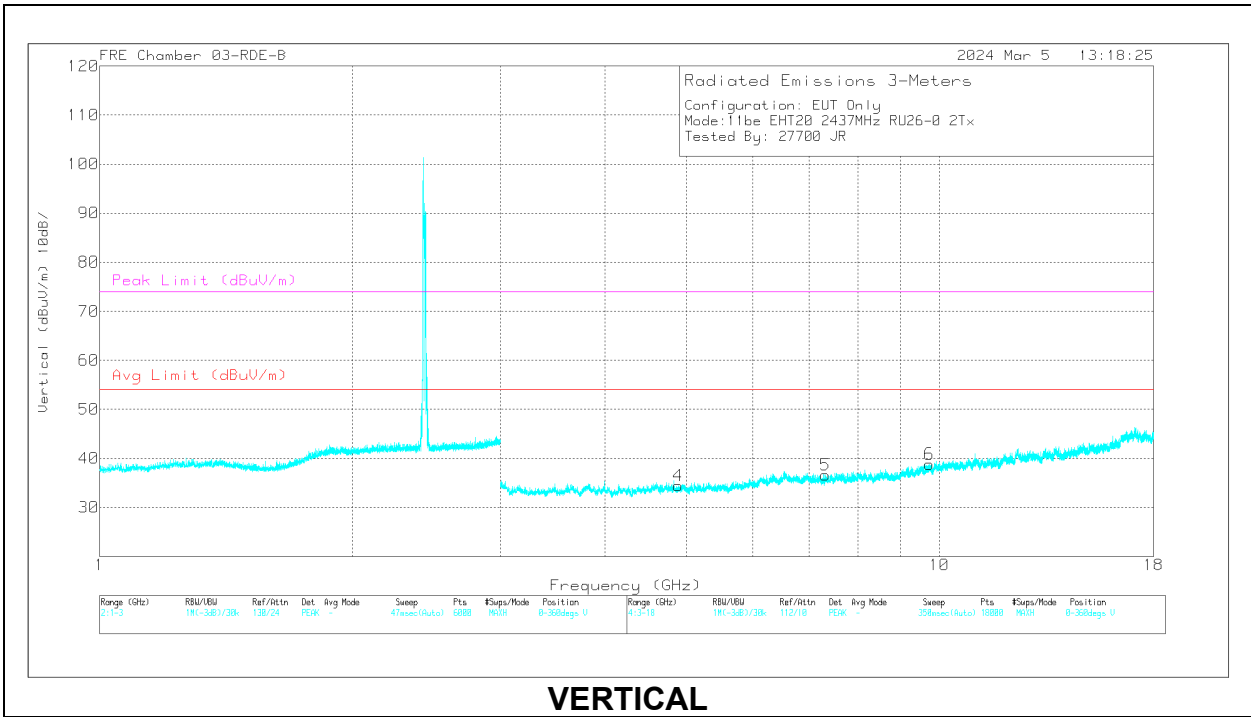

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.886925	60.37	PK2	34.2	0	-49.2	45.37	-	-	74	-28.63	286	200	H
	* 4.887651	47.93	MAv1	34.1	0	-49.2	32.83	54	-21.17	-	-	286	200	H
2	* 7.338196	58.11	PK2	35.8	0	-48	45.91	-	-	74	-28.09	340	111	H
	* 7.339044	46.87	MAv1	35.8	0	-48	34.67	54	-19.33	-	-	340	111	H
4	* 4.890739	59.77	PK2	34.1	0	-49.37	44.5	-	-	74	-29.5	331	154	V
	* 4.890609	47.95	MAv1	34.1	0	-49.36	32.69	54	-21.31	-	-	331	154	V
5	* 7.322873	58.84	PK2	35.8	0	-48	46.64	-	-	74	-27.36	321	223	V
	* 7.324952	46.98	MAv1	35.8	0	-48.1	34.68	54	-19.32	-	-	321	223	V
6	9.72718	59.78	PK2	37.2	0	-48	48.98	-	-	-	-	277	347	V
	9.728636	47.72	MAv1	37.2	0	-48	36.92	-	-	-	-	277	347	V
3	9.739422	59.16	PK2	37.2	0	-47.9	48.46	-	-	-	-	289	272	H
	9.739921	47.85	MAv1	37.2	0	-47.9	37.15	-	-	-	-	289	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

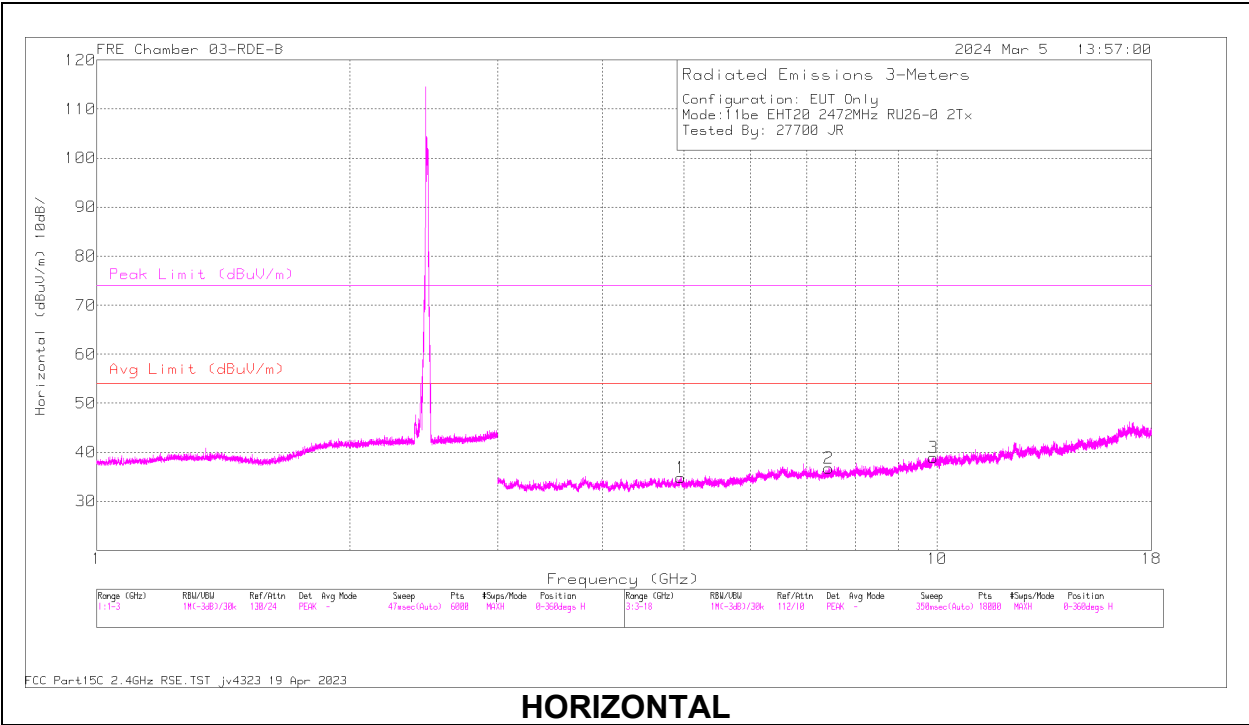

HORIZONTAL

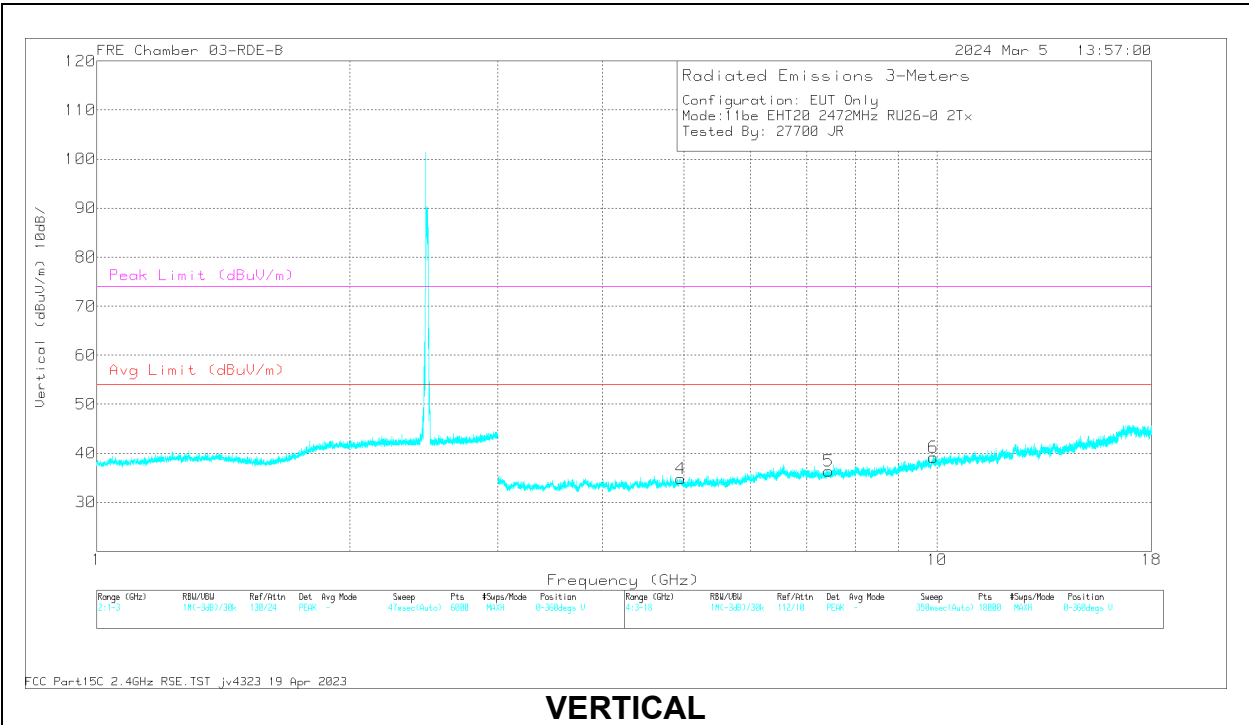

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.956082	60.61	PK2	34.2	0	-49.49	45.32	-	-	74	-28.68	74	101	H
	* 4.954321	48.62	MAv1	34.2	0	-49.5	33.32	54	-20.68	-	-	74	101	H
2	* 7.42567	58.23	PK2	35.9	0	-47.9	46.23	-	-	74	-27.77	358	176	H
	* 7.426698	46.98	MAv1	35.9	0	-47.83	35.05	54	-18.95	-	-	358	176	H
4	* 4.958398	60.14	PK2	34.2	0	-49.36	44.98	-	-	74	-29.02	322	176	V
	* 4.955584	48.68	MAv1	34.2	0	-49.5	33.38	54	-20.62	-	-	322	176	V
5	* 7.426594	58.67	PK2	35.9	0	-47.84	46.73	-	-	74	-27.27	169	190	V
	* 7.427505	46.83	MAv1	35.9	0	-47.85	34.88	54	-19.12	-	-	169	190	V
6	9.892894	59.76	PK2	37.4	0	-48.1	49.06	-	-	-	-	254	249	V
	9.894884	48.36	MAv1	37.4	0	-48.19	37.57	-	-	-	-	254	249	V
3	9.897372	60.09	PK2	37.4	0	-48.2	49.29	-	-	-	-	247	152	H
	9.898422	48.41	MAv1	37.4	0	-48.16	37.65	-	-	-	-	247	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 1 GHz

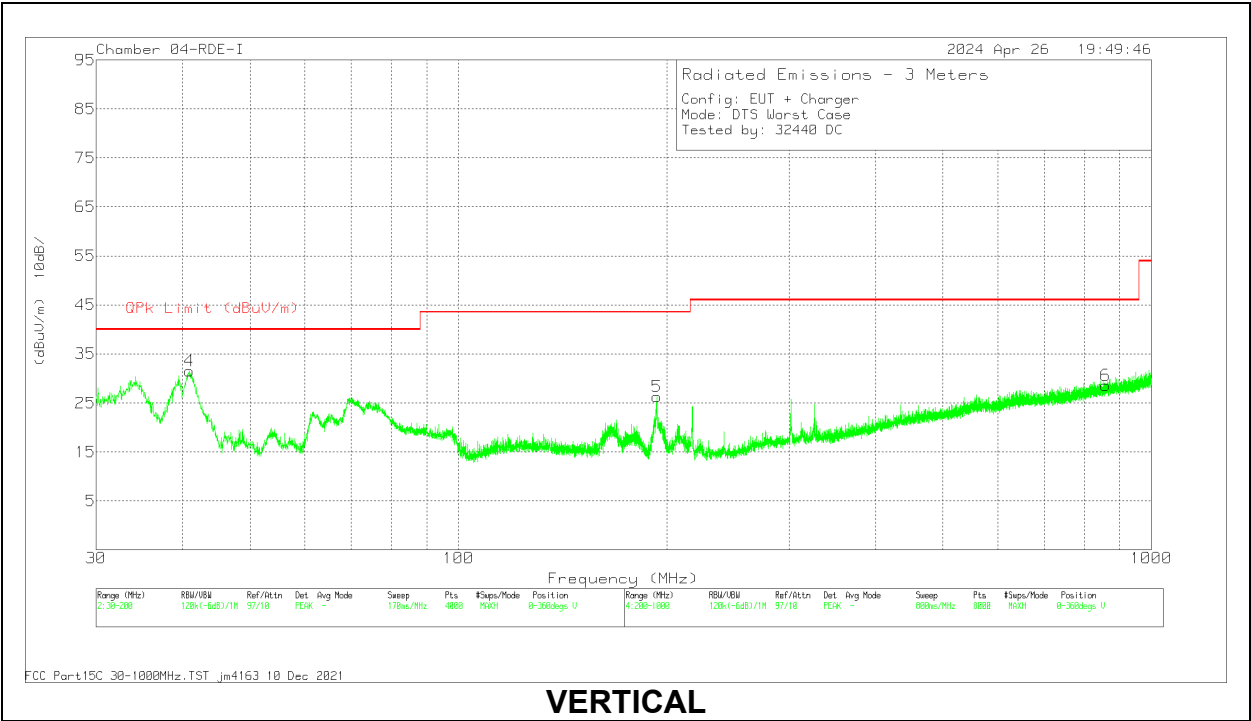
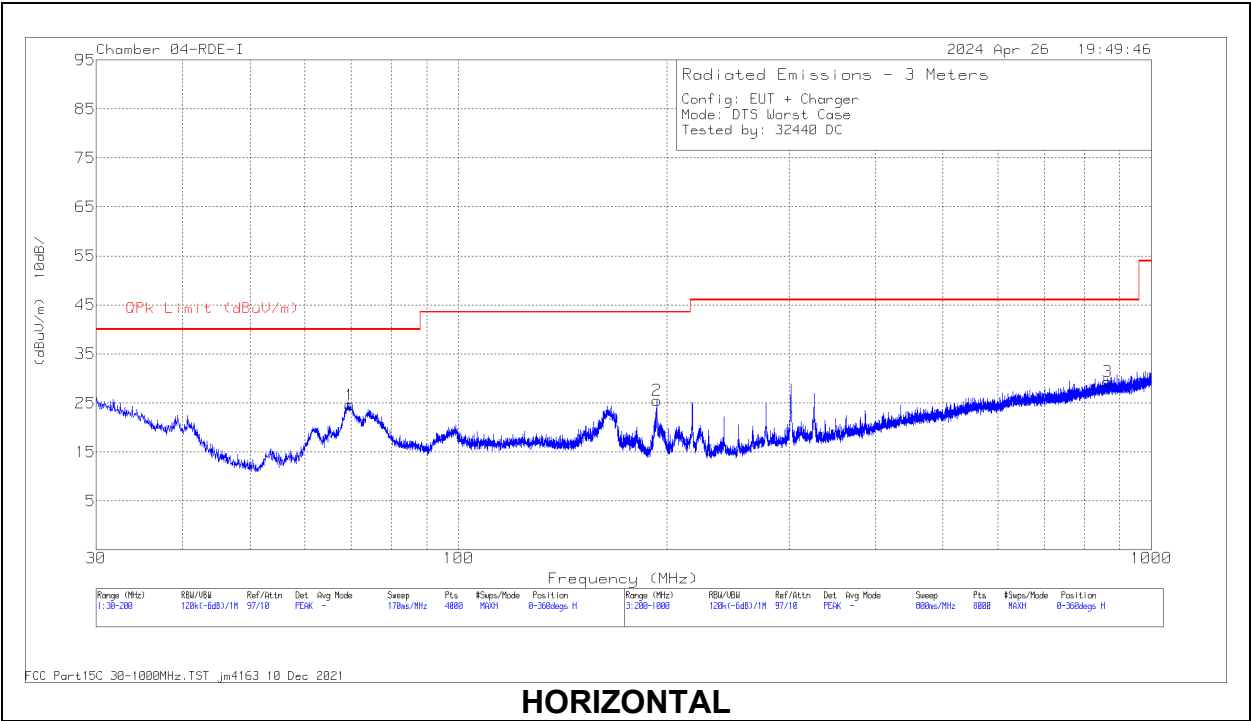


Below 1GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80714 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	40.8828	43	Pk	19.7	-31.2	0	31.5	40	-8.5	0-360	100	V
1	69.6628	40.76	Pk	14.7	-30.9	0	24.56	40	-15.44	0-360	299	H
5	193.285	38.73	Pk	17.8	-30.2	0	26.33	43.52	-17.19	0-360	100	V
2	193.412	37.95	Pk	17.8	-30.2	0	25.55	43.52	-17.97	0-360	101	H
6	859.186	28.79	Pk	27.3	-27.5	0	28.59	46.02	-17.43	0-360	101	V
3	863.986	29.71	Pk	27.3	-27.7	0	29.31	46.02	-16.71	0-360	199	H

Pk - Peak detector

10.3. WORST CASE 18-26 GHz

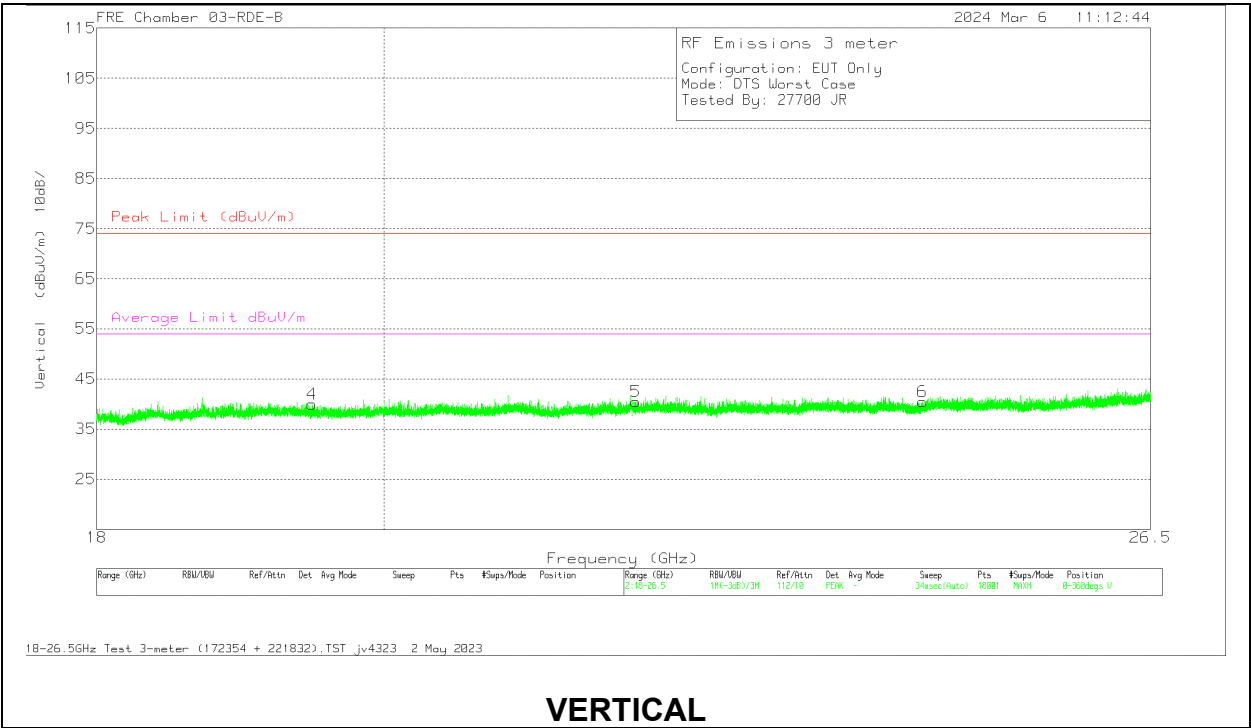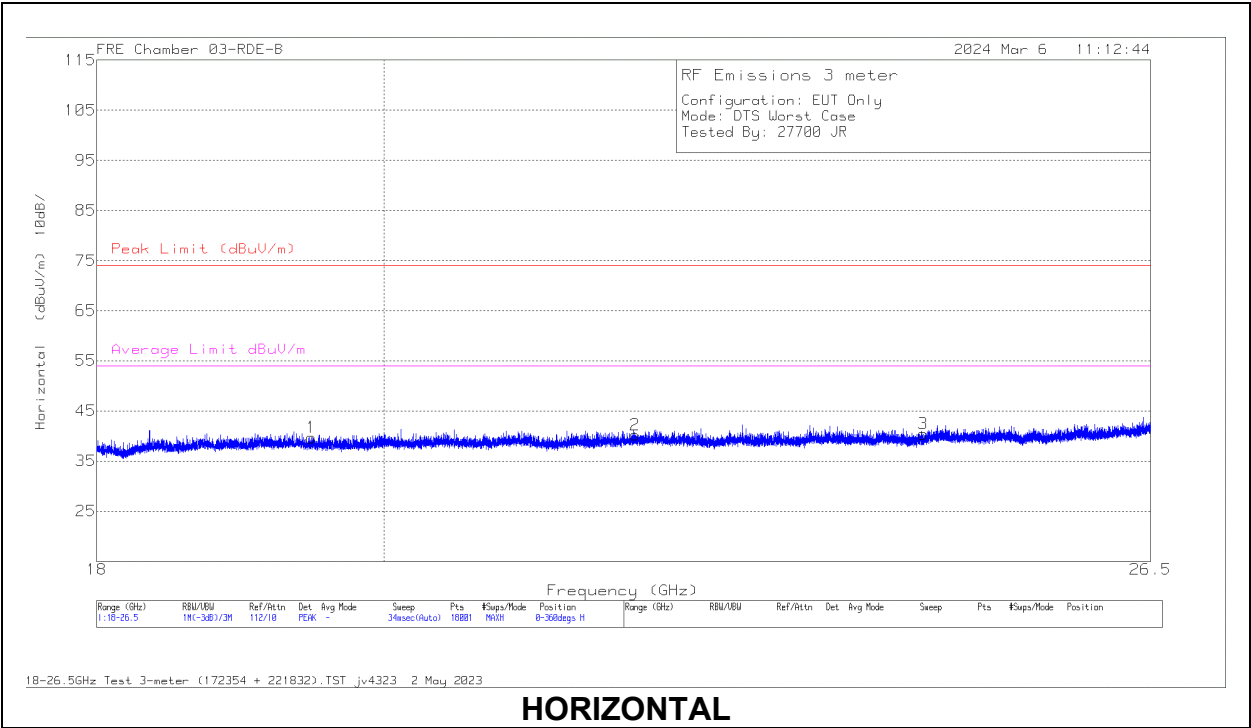

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172354 AFC (dB/m)	18-26GHz Amp (dB)	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19.47427	56.16	Pk	32.5	-62.8	13.8	0	39.66	74	-34.34	54	-14.34	0-360	199	H
4	* 19.47899	56.34	Pk	32.5	-62.7	13.8	0	39.94	74	-34.06	54	-14.06	0-360	101	V
2	21.93172	54.49	Pk	33.1	-62.1	14.7	0	40.19	74	-33.81	54	-13.81	0-360	101	H
5	21.939748	54.77	Pk	33.1	-62.1	14.7	0	40.47	74	-33.53	54	-13.53	0-360	200	V
6	24.371219	53.53	Pk	33.5	-62.1	15.5	0	40.43	74	-33.57	54	-13.57	0-360	101	V
3	24.380191	53.51	Pk	33.5	-62.1	15.5	0	40.41	74	-33.59	54	-33.59	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS

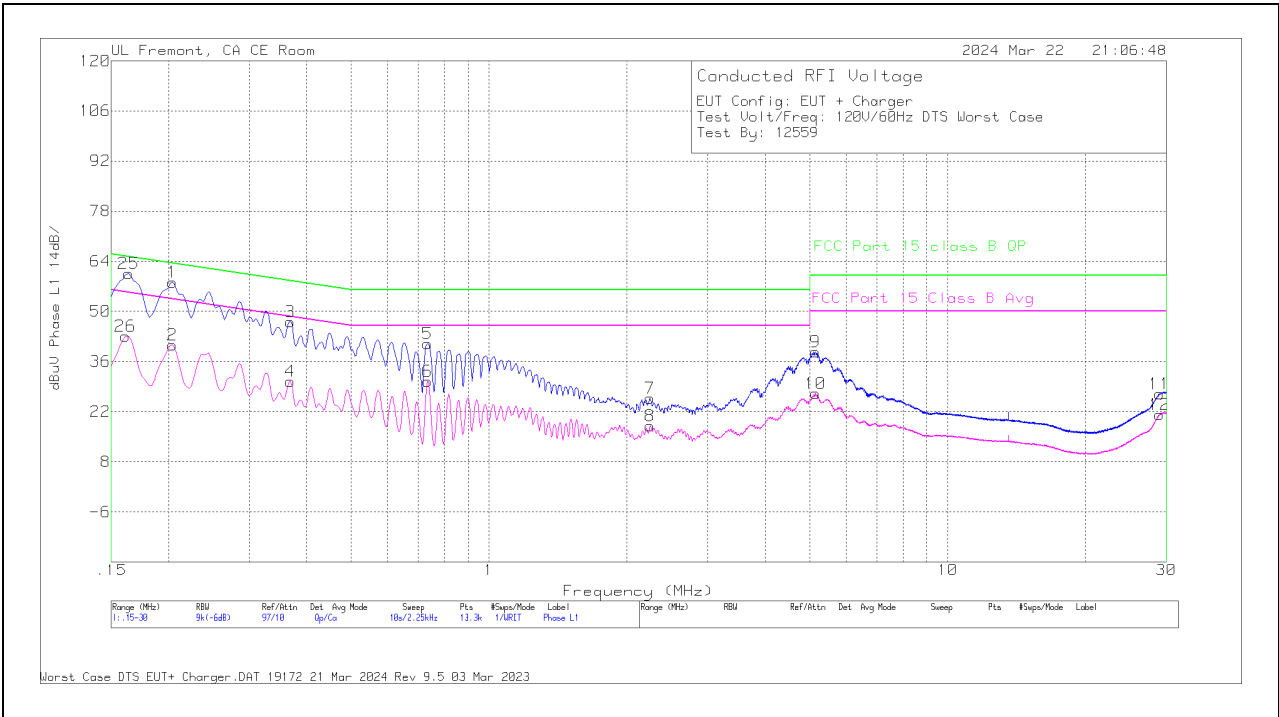


DATA

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.204	21.17	Ca	.1	0	9.4	10	40.67	53.45	-12.78	-	-
4	.3683	11.09	Ca	0	0	9.4	10	30.49	48.54	-18.05	-	-
6	.735	10.91	Ca	.1	0	9.4	10	30.41	46	-15.59	-	-
8	2.247	-1.52	Ca	.1	0	9.5	10	18.08	46	-27.92	-	-
10	5.145	7.55	Ca	.1	0	9.4	10	27.05	50	-22.95	-	-
12	28.986	1.1	Ca	.3	.3	9.5	10	21.2	50	-28.8	-	-
26	.1613	23.46	Ca	0	.1	9.5	10	43.06	55.4	-12.34	-	-
1	.204	38.72	Qp	.1	0	9.4	10	58.22	-	-	63.45	-5.23
3	.3683	27.78	Qp	0	0	9.4	10	47.18	-	-	58.54	-11.36
5	.735	21.43	Qp	.1	0	9.4	10	40.93	-	-	56	-15.07
7	2.2425	6.1	Qp	.1	0	9.5	10	25.7	-	-	56	-30.3
9	5.145	19.18	Qp	.1	0	9.4	10	38.68	-	-	60	-21.32
11	28.995	6.91	Qp	.3	.3	9.5	10	27.01	-	-	60	-32.99
25	.1635	40.98	Qp	0	.1	9.5	10	60.58	-	-	65.28	-4.7

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

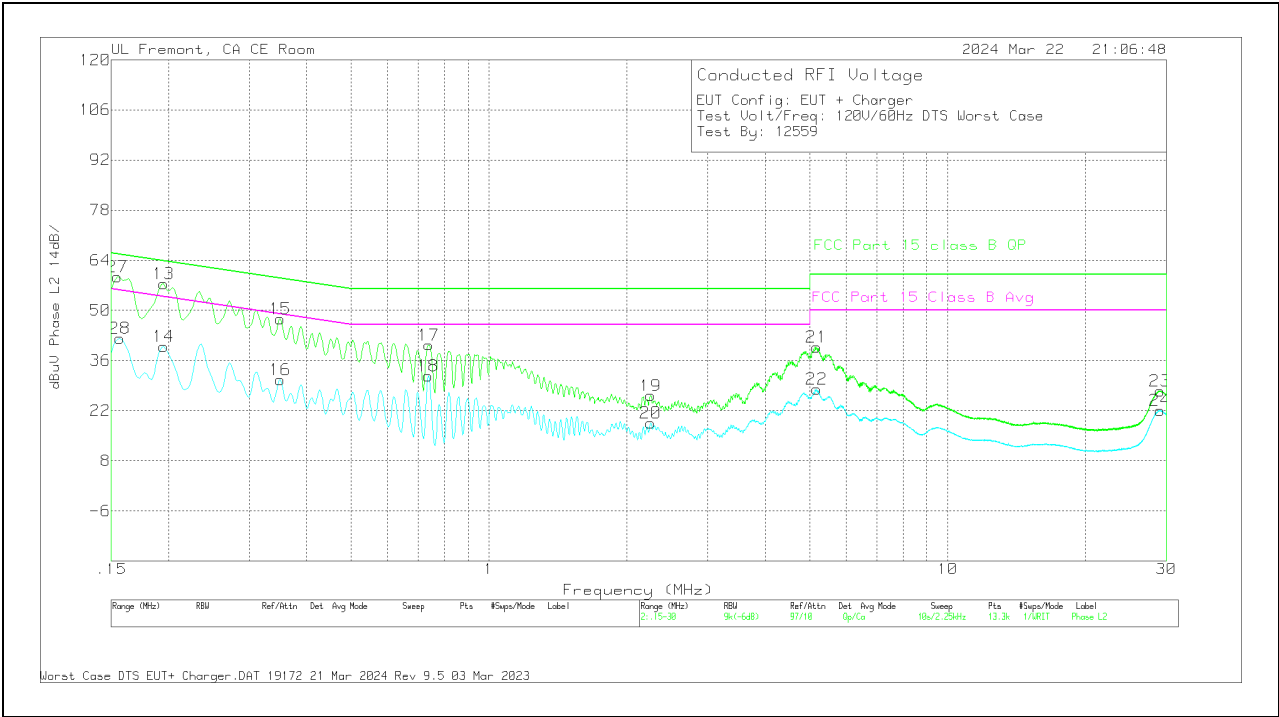


DATA

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBUV)	FCC Part 15 Class B Avg (dBUV)	Margin (dB)	FCC Part 15 class B QP (dBUV)	Margin (dB)
14	.195	20.43	Ca	.1	0	9.4	10	39.93	53.82	-13.89	-	-
16	.3503	11.14	Ca	.1	0	9.4	10	30.64	48.96	-18.32	-	-
18	.7373	12.3	Ca	0	0	9.4	10	31.7	46	-14.3	-	-
20	2.2538	-1.09	Ca	.1	0	9.5	10	18.51	46	-27.49	-	-
22	5.1821	8.34	Ca	.2	0	9.4	10	27.94	50	-22.06	-	-
24	29.049	2.12	Ca	.4	.2	9.4	10	22.12	50	-27.88	-	-
28	.1568	22.54	Ca	0	.1	9.5	10	42.14	55.63	-13.49	-	-
13	.195	37.94	Qp	.1	0	9.4	10	57.44	-	-	63.82	-6.38
15	.3503	28.12	Qp	.1	0	9.4	10	47.62	-	-	58.96	-11.34
17	.7395	20.95	Qp	0	0	9.4	10	40.35	-	-	56	-15.65
19	2.2538	6.57	Qp	.1	0	9.5	10	26.17	-	-	56	-29.83
21	5.1833	20.2	Qp	.2	0	9.4	10	39.8	-	-	60	-20.2
23	29.0535	7.46	Qp	.4	.2	9.4	10	27.46	-	-	60	-32.54
27	.1545	39.76	Qp	0	.1	9.5	10	59.36	-	-	65.75	-6.39

Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2. AC POWER LINE WITH LAPTOP

LINE 1 RESULTS

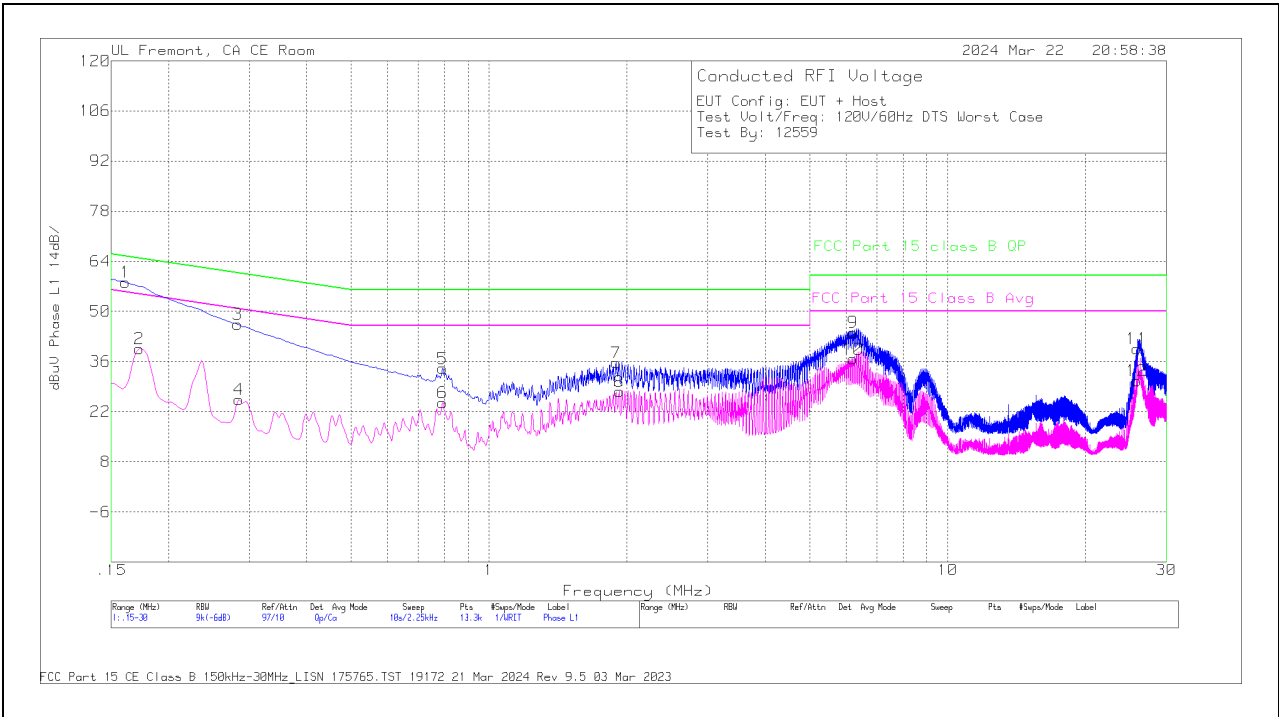


DATA

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1725	19.96	Ca	0	.1	9.5	10	39.56	54.84	-15.28	-	-
4	.285	5.9	Ca	.1	0	9.4	10	25.4	50.67	-25.27	-	-
6	.7913	5.1	Ca	.1	0	9.3	10	24.5	46	-21.5	-	-
8	1.923	8.27	Ca	0	0	9.3	10	27.57	46	-18.43	-	-
10	6.2228	17.08	Ca	.2	0	9.4	10	36.68	50	-13.32	-	-
12	25.881	10.69	Ca	.3	.2	9.4	10	30.59	50	-19.41	-	-
1	.1613	38.5	Qp	0	.1	9.5	10	58.1	-	-	65.4	-7.3
3	.2828	26.97	Qp	.1	0	9.4	10	46.47	-	-	60.73	-14.26
5	.7913	14.65	Qp	.1	0	9.3	10	34.05	-	-	56	-21.95
7	1.8915	16.34	Qp	0	0	9.3	10	35.64	-	-	56	-20.36
9	6.225	24.49	Qp	.2	0	9.4	10	44.09	-	-	60	-15.91
11	25.8833	19.65	Qp	.3	.2	9.4	10	39.55	-	-	60	-20.45

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

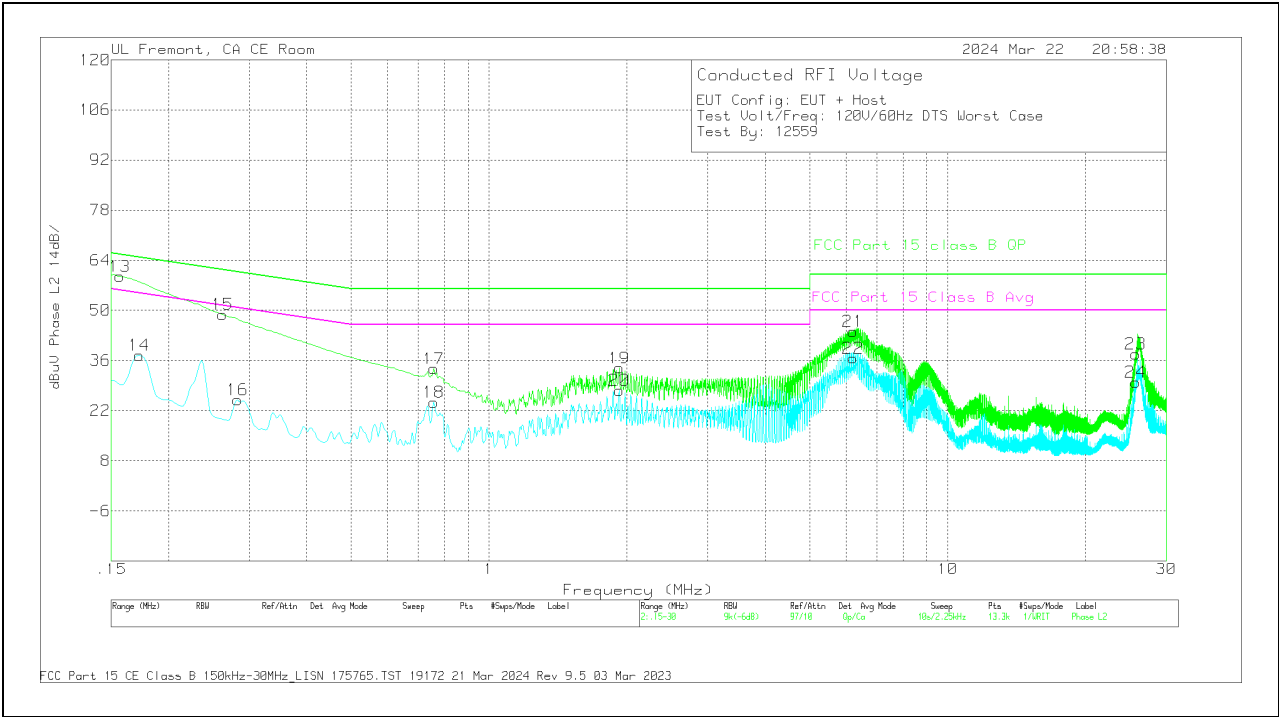

DATA

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1725	17.99	Ca	0	0	9.5	10	37.49	54.84	-17.35	-	-
16	.2828	5.51	Ca	.1	0	9.4	10	25.01	50.73	-25.72	-	-
18	.7575	4.99	Ca	0	0	9.4	10	24.39	46	-21.61	-	-
20	1.923	8.19	Ca	.1	0	9.3	10	27.59	46	-18.41	-	-
22	6.2228	17.17	Ca	.1	0	9.4	10	36.67	50	-13.33	-	-
24	25.6875	9.87	Ca	.3	.2	9.5	10	29.87	50	-20.13	-	-
13	.1568	39.87	Qp	0	.1	9.5	10	59.47	-	-	65.63	-6.16
15	.2625	29.45	Qp	0	0	9.4	10	48.85	-	-	61.35	-12.5
17	.7575	14.31	Qp	0	0	9.4	10	33.71	-	-	56	-22.29
19	1.923	14.48	Qp	.1	0	9.3	10	33.88	-	-	56	-22.12
21	6.2228	24.57	Qp	.1	0	9.4	10	44.07	-	-	60	-15.93
23	25.6875	17.82	Qp	.3	.2	9.5	10	37.82	-	-	60	-22.18

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 14982484-EP1V1 for setup photos

END OF TEST REPORT