

TEST REPORT

Report Number: 14982489-E3V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S. A

Model : A3082 (Parent Model)
A3289, A3290, A3291 (Variant Models)

Brand : APPLE

FCC ID : BCG-E8692A (Parent Model)
BCG-E8693A, BCG-E8694A, BCG-E8695A
(Variant Models)

IC : 579C-E8692A (Parent Model)
579C-E8693A, 579C-E8694A, 579C-E8695A
(Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2024/08/14

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2024/08/08	Initial Issue	Chris Xiong
V2	2024/08/14	Addressed TCB Questions on section 9 and 10	Tony Li

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.4. SOFTWARE AND FIRMWARE.....	10
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. MEASUREMENT METHOD.....	14
8. TEST AND MEASUREMENT EQUIPMENT	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE.....	16
9.2. 99% BANDWIDTH.....	17
9.2.1. HIGH POWER HDR (HDR4).....	18
9.2.2. HIGH POWER HDR TXBF (HDR4)	19
9.2.3. HIGH POWER HDR (HDR8).....	20
9.2.4. HIGH POWER HDR TXBF (HDR8)	21
9.3. 6 dB BANDWIDTH.....	22
9.3.1. HIGH POWER HDR (HDR4).....	23
9.3.2. HIGH POWER HDR4 TXBF	24
9.4. OUTPUT POWER)	25
9.4.1. HIGH POWER HDR (HDR4).....	26
9.4.2. HIGH POWER HDR TXBF (HDR4)	26
9.4.3. HIGH POWER HDR (HDR8).....	27
9.4.4. HIGH POWER HDR TXBF (HDR8)	27
9.4.5. LOW POWER HDR (HDR4)	28
9.4.6. LOW POWER HDR TXBF (HDR4)	28
9.4.7. LOW POWER HDR (HDR8)	29

9.4.8.	LOW POWER HDR TXBF (HDR8)	29
9.5.	AVERAGE POWER	30
9.5.1.	HIGH POWER HDR (HDR4)	31
9.5.2.	HIGH POWER HDR TXBF (HDR4)	31
9.5.3.	HIGH POWER HDR (HDR8)	32
9.5.4.	HIGH POWER HDR TXBF (HDR8)	32
9.5.5.	LOW POWER HDR (HDR4)	33
9.5.6.	LOW POWER HDR TXBF (HDR4)	33
9.5.7.	LOW POWER HDR (HDR8)	34
9.5.8.	LOW POWER HDR TXBF (HDR8)	34
9.6.	POWER SPECTRAL DENSITY	35
9.6.1.	HIGH POWER HDR (HDR4)	36
9.6.2.	HIGH POWER HDR TXBF (HDR4)	37
9.6.3.	HIGH POWER HDR (HDR8)	38
9.6.4.	HIGH POWER HDR TXBF (HDR8)	39
9.7.	CONDUCTED SPURIOUS EMISSIONS	40
9.7.1.	HIGH POWER HDR (HDR4)	41
9.7.2.	HIGH POWER HDR TXBF (HDR4)	43
9.7.3.	HIGH POWER HDR (HDR8)	45
9.7.4.	HIGH POWER HDR TXBF (HDR8)	47
9.7.5.	LOW POWER HDR (HDR4)	49
9.7.6.	LOW POWER HDR TXBF (HDR4)	51
9.7.7.	LOW POWER HDR (HDR8)	53
9.7.8.	LOW POWER HDR TXBF (HDR8)	55
10.	RADIATED TEST RESULTS	57
10.1.	LIMITS AND PROCEDURE	57
10.2.	TRANSMITTER ABOVE 1 GHz	59
10.2.1.	59	
10.2.2.	HIGH POWER HDR (HDR4)	59
10.2.3.	HIGH POWER HDR TXBF (HDR4)	67
10.2.4.	HIGH POWER HDR (HDR8)	71
10.2.5.	HIGH POWER HDR TXBF (HDR8)	79
10.2.6.	LOW POWER HDR (HDR4)	83
10.2.7.	LOW POWER HDR TXBF (HDR4)	91
10.2.8.	LOW POWER HDR (HDR8)	95
10.2.9.	LOW POWER HDR TXBF (HDR8)	103
10.2.10.	WORST CASE HARMONICS AND SPURIOUS EMISSIONS	107
10.3.	WORST CASE BELOW 1 GHz	113
10.4.	WORST CASE 18-26 GHz	115
11.	AC POWER LINE CONDUCTED EMISSIONS	117
11.1.	AC Power Line With AC/DC Adapter	118
11.2.	AC Power Line with Laptop	120
12.	SETUP PHOTOS	122

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMART PHONE

MODEL: A3081

BRAND: APPLE

SERIAL NUMBER: FJWNV71QMD

SAMPLE RECEIPT DATE: 2024/03/05

DATE TESTED: 2024/03/07 – 2024/08/13.

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 3	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Frank Ibrahim
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Alfonso Sanchez
Senior Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB662911, RSS-GEN Issue 5 +A1 +A2, and RSS-247 Issue 3.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94 dB
Power Spectral Density	2.47 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 (AV), 1.3 (PK)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5GNR1, 5GNR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), WPT (Wireless Power Transfer) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2404 - 2476	HDR4	15.67	36.90
	Low Power			7.67	5.85
	High Power		HDR8	15.93	39.17
	Low Power			7.97	6.27
ANT 3	High Power	2404 - 2476	HDR4	15.59	36.22
	Low Power			7.63	5.79
	High Power		HDR8	16.00	39.81
	Low Power			7.98	6.28
BF, ANT 4+ ANT 3	High Power	2404 - 2476	HDR4	18.63	72.95
	Low Power			10.64	11.59
	High Power		HDR8	18.94	78.34
	Low Power			10.97	12.50

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) type is IFA type.

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-0.1	-0.6

SMA Cable used for RF conducted testing has a loss as follows:

Loss used for Antenna 4 is 2 dB

Loss used for Antenna 3 is 2.1dB

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware and software version installed during testing was 22.1.76.242.

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and 2TX beamforming. It was determined that X (Flatbed) orientation was the worst-case orientation for ANT 3, ANT 4 and beamforming 2TX.

Radiated band edge, harmonic and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

High power HDR4 and HDR8 TXBF harmonic spurious 1-18GHz were investigated to determine the worst case and results showed HDR4 was the worst case. Therefore, High Power Beamforming HDR4 mode was set to maximum power based on SISO to cover both SISO and MIMO modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel (except the band edge).

Radiated emissions below 30MHz, 30-1000MHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 30MHz, 30-1000MHz emissions spurious tests were performed with EUT connected to AC power adapter and set at X orientation as the worst case; and for 18-26GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.



Note: In the Radiated Plots and emissions data, ANT0=ANT4 and ANT1=ANT3.



6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Macbook Pro	C02VD7SAHV22		BCGA1708
Laptop AC/DC adapter		Liteon Technology	A1424	NSW25679		DoC
EUT AC/DC adapter		Apple	A1720	C3D8417A7R93KVPA8		DoC
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.75	To spectrum Analyzer
2	Antenna	2	SMA	Un-shielded	0.2	To Conducted Switch Box
3	USB-C	1	USB-C	Shielded	1.0	N/A
4	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

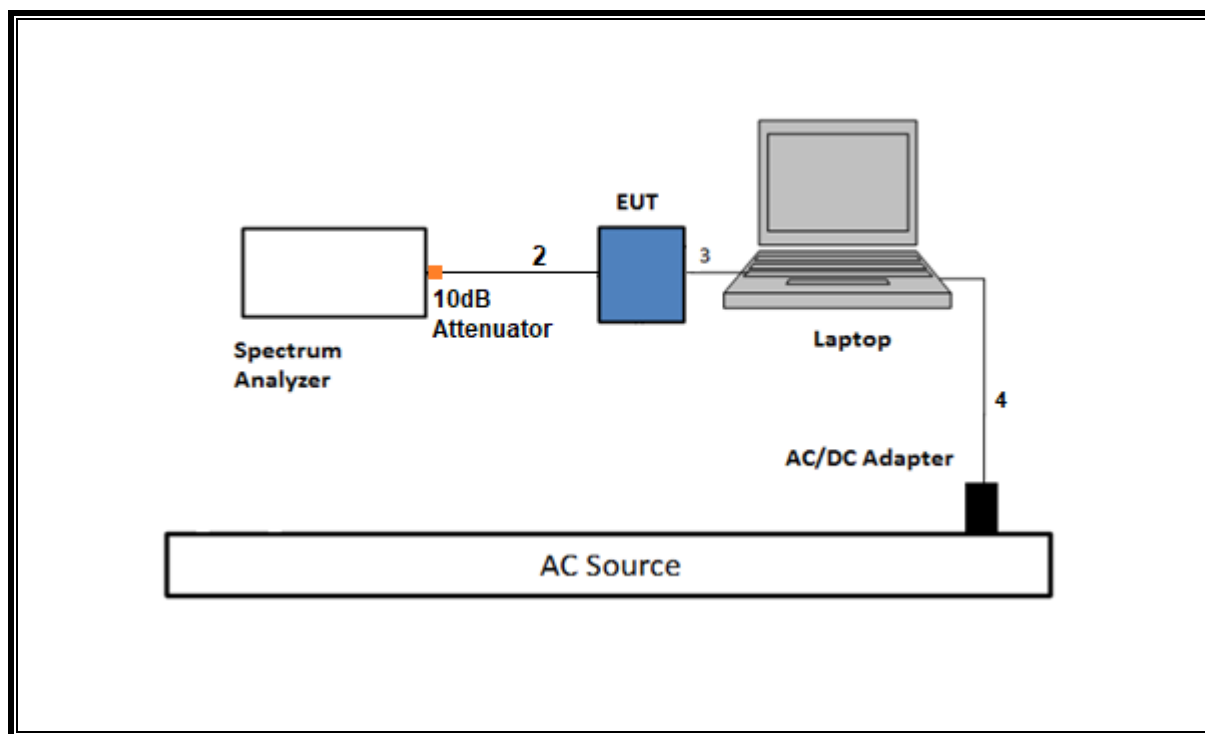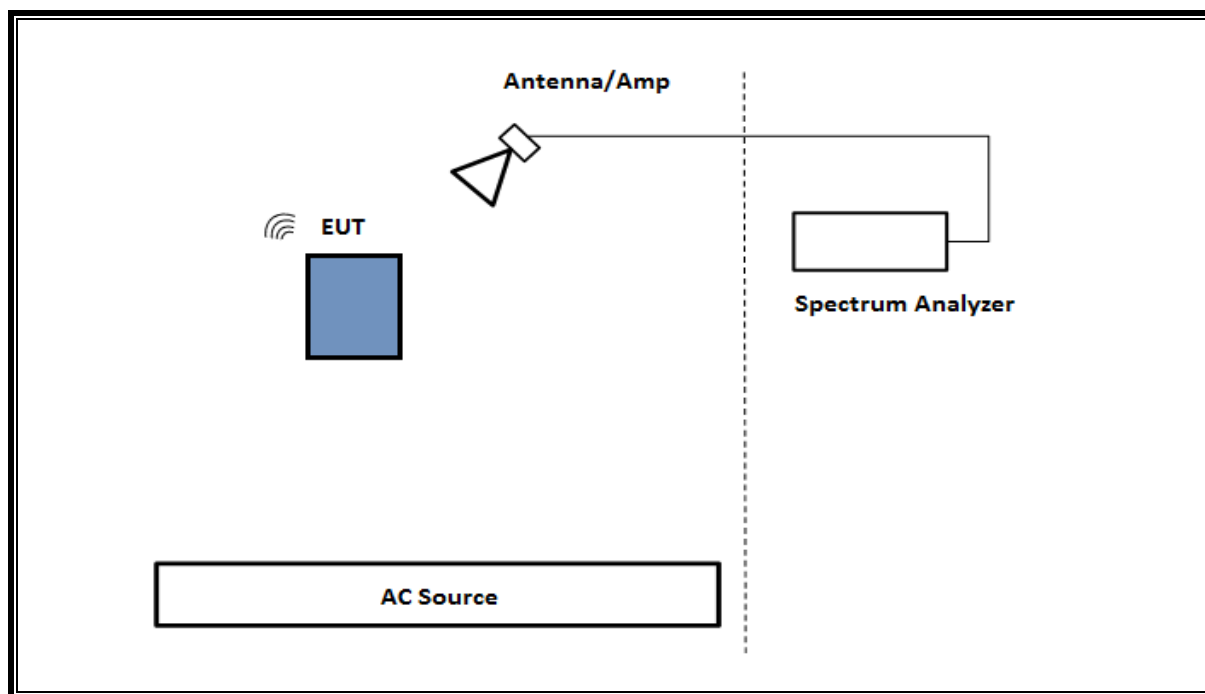SETUP DIAGRAM FOR CONDUCTED TESTS**SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz (1 to 26GHz)**

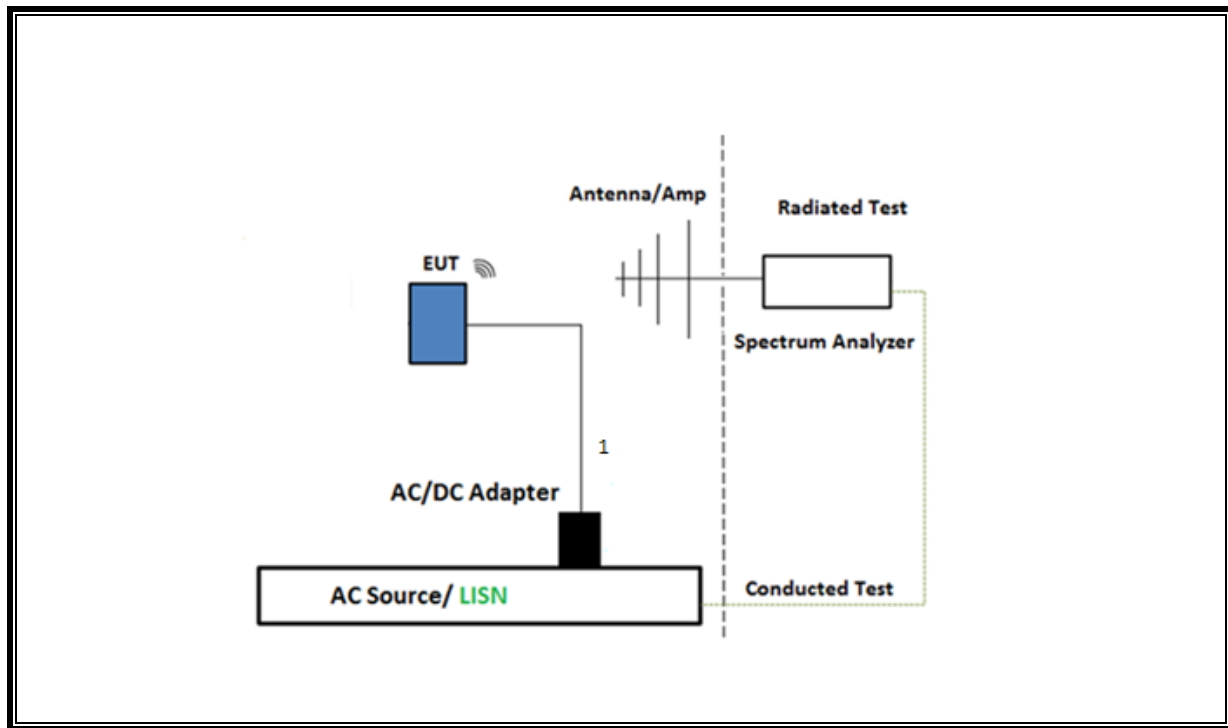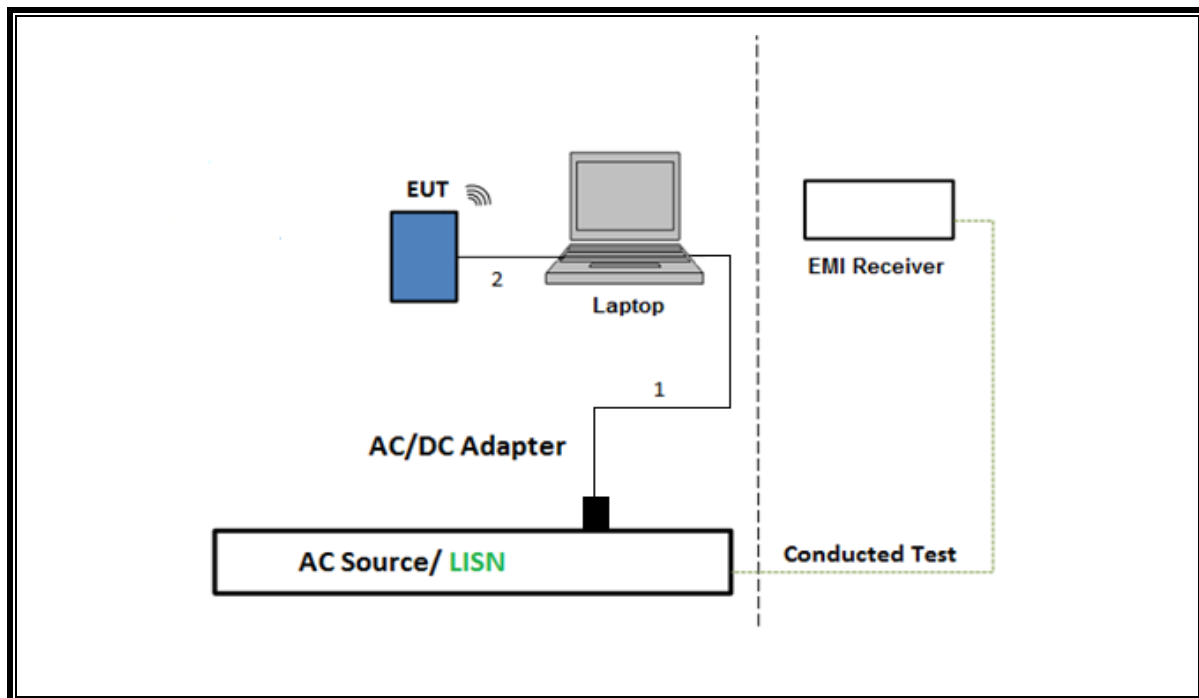SETUP DIAGRAM FOR 30-1000MHz and AC LINE CONDUCTED TEST**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05r02, Section 6.

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW $\geq$ DTS BW

Occupied BW (99%): ANSI C63.10 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter.

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2.

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection.

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power.

Radiated Band-edge: ANSI C63.10 Section 6.10.5 & 13

AC Power Line Conducted Emissions: ANSI C63.10, Section 6.2.

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause – 11.11 & Clause 13

Radiated Spurious Emissions Below 30MHz: ANSI C63.10 Section 6.4 & 13

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as HDR normal modes.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	125178	2025/01/31
Spectrum Analyzer, PXA, 3Hz to 50GHz w/Ext. Mixer	Keysight Technologies Inc	N9030A	80400	2025/02/28
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236353	2024/08/31
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236355	2024/08/31
Power Meter, P-Series single channel	Keysight Technologies Inc	N1911A	90719	2025/01/31
Power Sensor, P - Series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2025/01/31
*Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170015	2024/07/31
*Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170013	2024/07/31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200897	2025/03/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201501	2024/11/30
RF Filter Box, 1-18GHz, 12 Ports	UL-FR1	Frankenstein	217521	2024/08/31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	41112	2024/10/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201499	2025/02/11
RF Filter Box, 1-18GHz, 2025/03/31 Ports	UL-FR1	RATS 2	224478	2025/01/31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	223083	2024/10/31
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	225474	2025/04/30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	191429	2025/02/28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	84797	2024/09/30
RF Filter Box, 1-18GHz, 12 Ports	UL-FR1	Frankenstein	217255	2024/10/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201497	2025/02/28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	230299	2025/01/31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223461	2024/08/29
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	225079	2025/04/30
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp	JB3	222008	2024/10/23
Link File, @3m, 9kHz-1000MHz Hybrid Path Loss	UL-FR1	Port 0 Factors	232001	2025/02/28
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	81139	2024/08/31
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	171583	2025/03/31

AC Line Conducted				
Description	Manufacturer	Model	ID Num	Cal Due
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	93091	2025/02/28
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175765	2025/01/31
Transient Limiter	TE	TBFL1	207996	2024/08/31
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, 2023, May 1	
Conducted Software	UL	UL EMC	2020.8.16	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, 2023, Mar 3	

*Testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
HDR4	100.000	100.000	1.000	100.00%	0.00	0.010
HDR8	100.000	100.000	1.000	100.00%	0.00	0.010

Note: There is the same DC factor on 1TX and 2TX.

DUTY CYCLE PLOTS

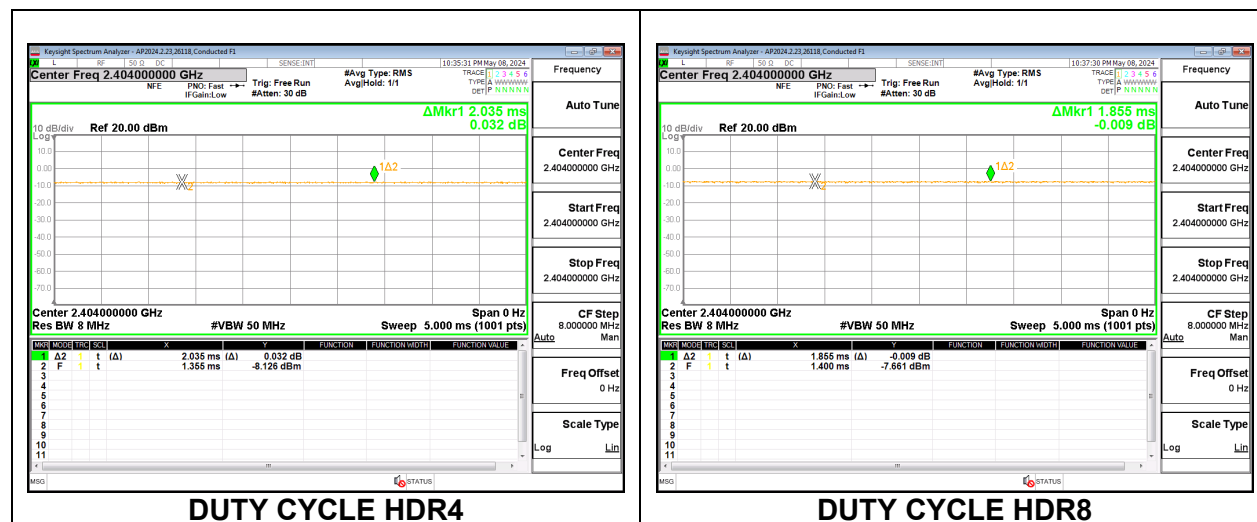

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


RESULTS

Only High-Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3102
Middle	2440	2.3120
High	2476	2.3140

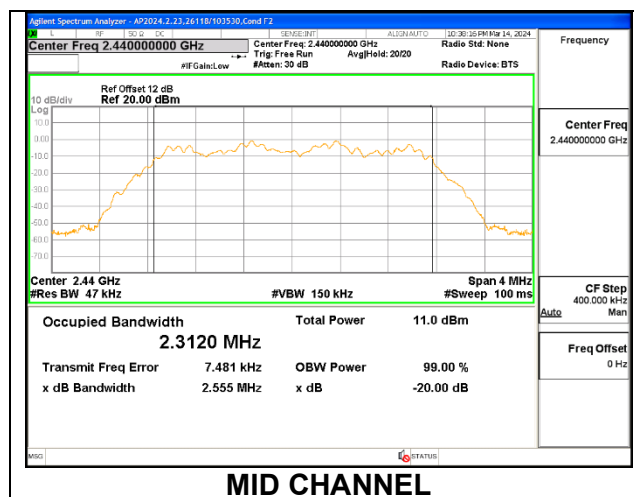


ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.3100
Middle	2440	2.3121
High	2476	2.3139

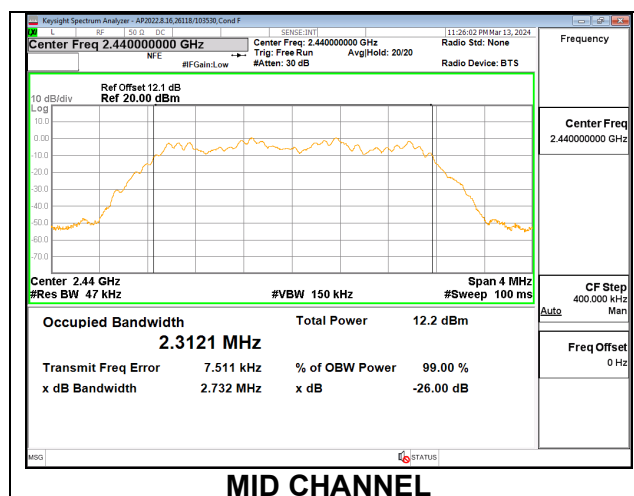

9.2.2. HIGH POWER HDR TXBF (HDR4)


Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	2.3102	2.3092
Middle	2440	2.3120	2.3113
High	2476	2.3141	2.3135

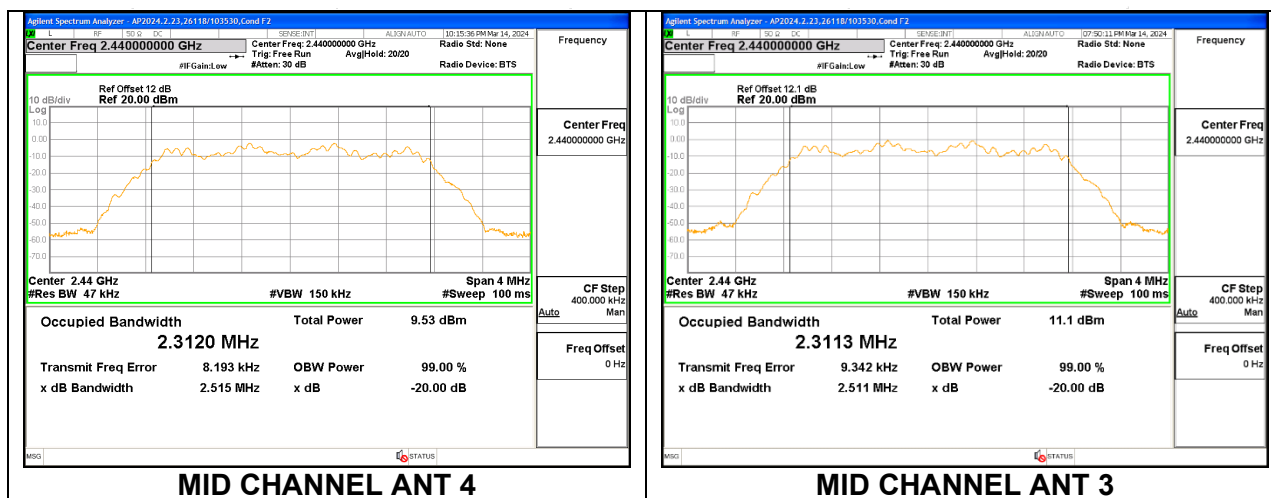

9.2.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.7951
Middle	2440	4.7950
High	2476	4.7966

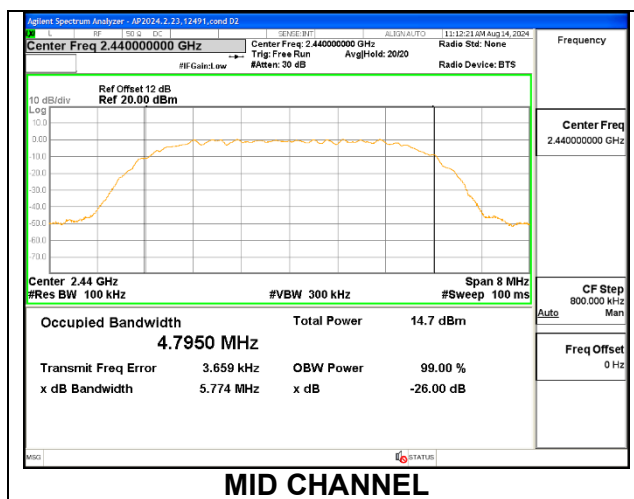



ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.7811
Middle	2440	4.7911
High	2476	4.8036

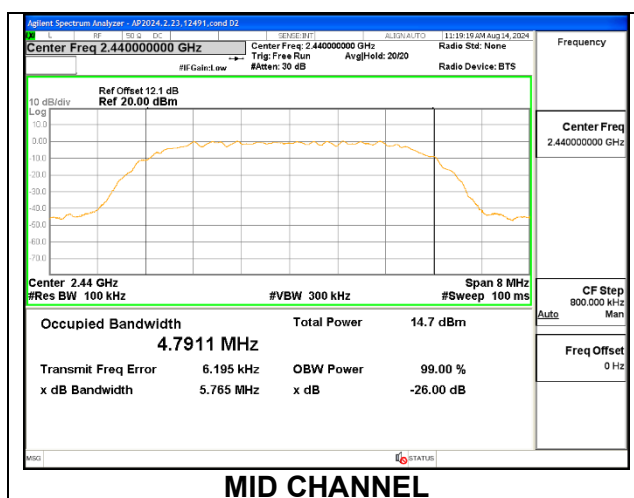

9.2.4. HIGH POWER HDR TXBF (HDR8)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	4.7909	4.7806
Middle	2440	4.7945	4.7930
High	2476	4.7984	4.8043

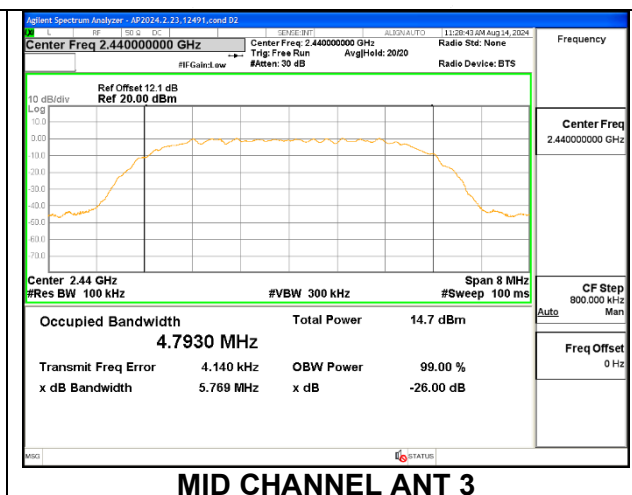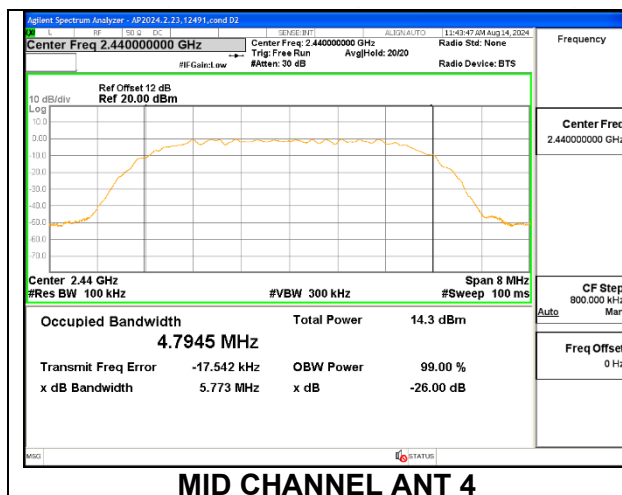

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

The 6dB bandwidth was measured for the narrowest bandwidth mode, HDR4, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the HDR4 mode, as demonstrated by the 99% bandwidth measurements performed on all modes.


Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

Only High-Power modes result is reported, it covers all Low Power modes.

9.3.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.084	0.5
Middle	2440	2.084	0.5
High	2476	2.112	0.5

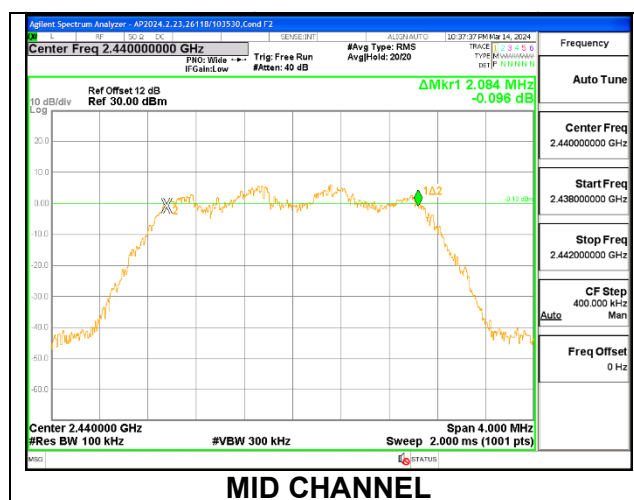


ANT 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.104	0.5
Middle	2440	2.080	0.5
High	2476	2.092	0.5

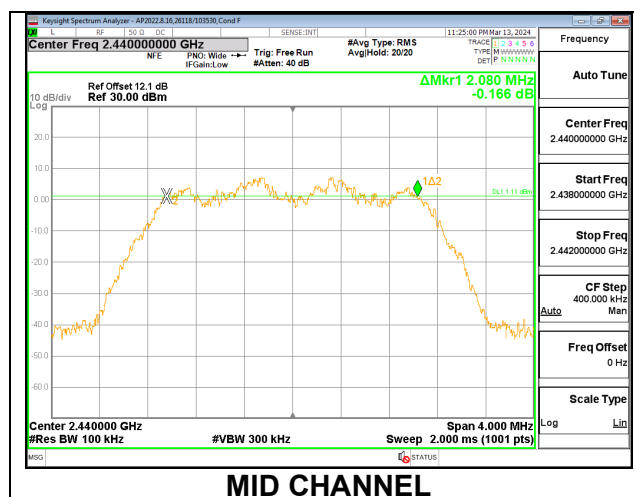

9.3.2. HIGH POWER HDR4 TXBF

Channel	Frequency (MHz)	6 dB Bandwidth ANT 4 (MHz)	6 dB Bandwidth ANT 3 (MHz)	Minimum Limit (MHz)
Low	2404	2.084	2.092	0.5
Mid	2440	2.088	2.084	0.5
High	2476	2.104	2.080	0.5

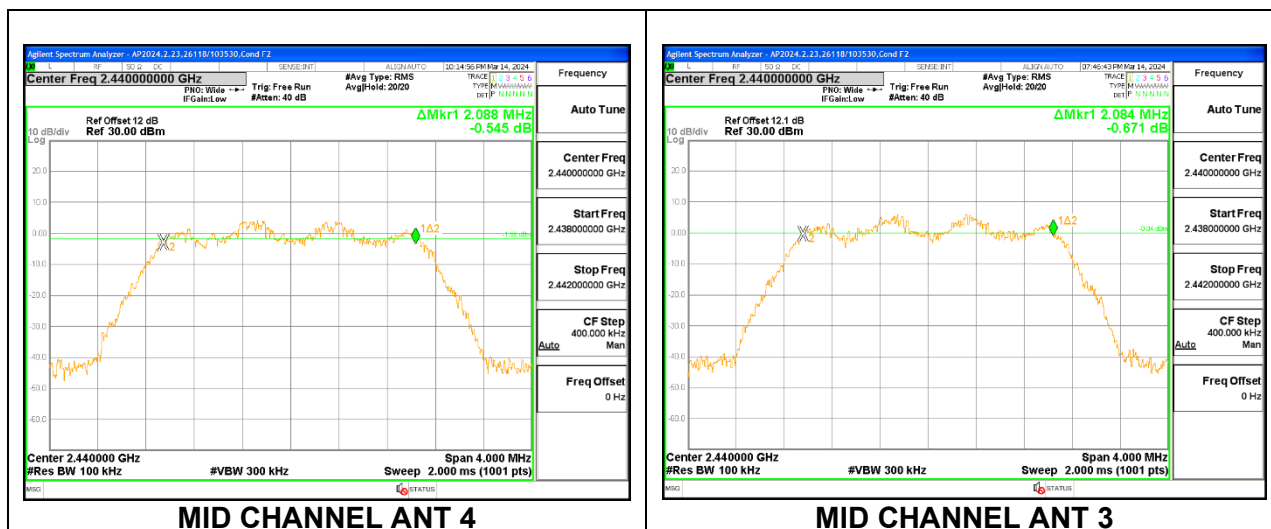

9.4. OUTPUT POWER)

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power and PSD due to the device supporting Beamforming mode. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	-0.10	-0.60	-0.34	2.66

Directional Gain Calculation:

ANSI C63.10-2020 section 14.4.3

Uncorrelated directional gain= $10 \cdot \log((10^{(\text{Ant4}/10)} + 10^{(\text{Ant3}/10)})/2)$

Correlated directional Gain= $10 \cdot \log(((10^{(\text{Ant4}/20)} + 10^{(\text{Ant3}/20)})^2/2)$

Sample Calculation:

Ant4=-0.10, Ant3=-0.60

Uncorrelated Antenna gain= $10 \log[(10^{(-0.1/10)} + 10^{(-0.6/10)})/2] = -0.34 \text{ dBi}$

Correlated Antenna gain= $10 \log[(10^{(-0.1/20)} + 10^{(-0.6/20)})^2/2] = 2.66 \text{ dBi}$

RESULTS

9.4.1. HIGH POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.65	30	-14.35
Middle	2440	15.67	30	-14.33
High	2476	15.60	30	-14.40

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.53	30	-14.47
Middle	2440	15.59	30	-14.41
High	2476	15.58	30	-14.42

9.4.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.55	15.58	18.58	30.00	-11.42
Middle	2440	15.61	15.62	18.63	30.00	-11.37
High	2476	15.52	15.65	18.60	30.00	-11.40

9.4.3. HIGH POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.88	30	-14.12
Middle	2440	15.93	30	-14.07
High	2476	15.87	30	-14.13

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.99	30	-14.01
Middle	2440	16.00	30	-14.00
High	2476	15.99	30	-14.01

9.4.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.95	15.88	18.93	30.00	-11.07
Middle	2440	15.88	15.88	18.89	30.00	-11.11
High	2476	15.93	15.92	18.94	30.00	-11.06

9.4.5. LOW POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.67	30	-22.33
Middle	2440	7.64	30	-22.36
High	2476	7.66	30	-22.34

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.63	30	-22.37
Middle	2440	7.60	30	-22.40
High	2476	7.57	30	-22.43

9.4.6. LOW POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.68	7.55	10.63	30.00	-19.37
Middle	2440	7.63	7.62	10.64	30.00	-19.36
High	2476	7.64	7.60	10.63	30.00	-19.37

9.4.7. LOW POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.85	30	-22.15
Middle	2440	7.97	30	-22.03
High	2476	7.84	30	-22.16

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.98	30	-22.02
Middle	2440	7.96	30	-22.04
High	2476	7.91	30	-22.09

9.4.8. LOW POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	7/11/2024

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	7.87	7.86	10.88	30.00	-19.12
Middle	2440	7.95	7.96	10.97	30.00	-19.03
High	2476	7.89	7.89	10.90	30.00	-19.10

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.5.1. HIGH POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.97
Middle	2440	12.99
High	2476	12.90

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.85
Middle	2440	12.89
High	2476	12.88

9.5.2. HIGH POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	12.86	12.89	15.89
Middle	2440	12.91	12.92	15.93
High	2476	12.82	12.94	15.89

9.5.3. HIGH POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.90
Middle	2440	12.93
High	2476	12.87

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	12.97
Middle	2440	12.99
High	2476	12.99

9.5.4. HIGH POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	12.93	12.87	15.91
Middle	2440	12.86	12.86	15.87
High	2476	12.91	12.91	15.92

9.5.5. LOW POWER HDR (HDR4)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	4.98
Middle	2440	4.94
High	2476	4.97

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	4.94
Middle	2440	4.90
High	2476	4.87

9.5.6. LOW POWER HDR TXBF (HDR4)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	4.99	4.87	7.94
Middle	2440	4.94	4.93	7.95
High	2476	4.96	4.91	7.95

9.5.7. LOW POWER HDR (HDR8)**ANT 4**

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	4.85
Middle	2440	4.96
High	2476	4.83

ANT 3

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	4.98
Middle	2440	4.95
High	2476	4.89

9.5.8. LOW POWER HDR TXBF (HDR8)

Tested By:	32181
Date:	8/1/2024

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	4.86	4.85	7.87
Middle	2440	4.93	4.94	7.95
High	2476	4.88	4.87	7.89

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

Only High-Power modes result is reported, it covers all Low Power modes.

9.6.1. HIGH POWER HDR (HDR4)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-0.668	8	-8.67
Middle	2440	-0.954	8	-8.95
High	2476	-1.660	8	-9.66

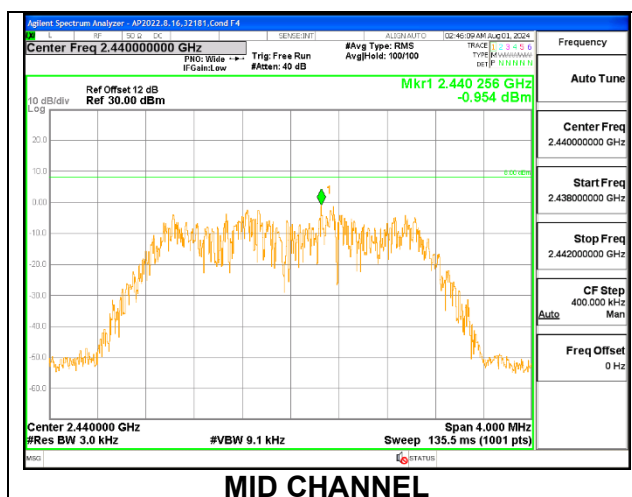

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-0.592	8	-8.59
Middle	2440	-0.796	8	-8.80
High	2476	-0.923	8	-8.92

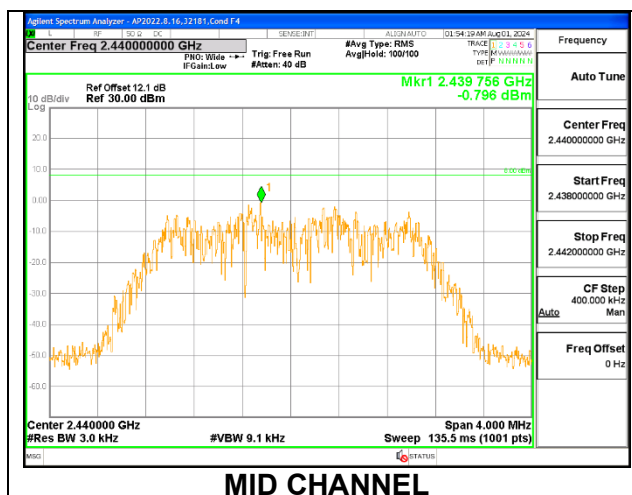


9.6.2. HIGH POWER HDR TXBF (HDR4)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results


Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-0.634	-1.170	2.12	8.0	-5.9
Mid	2440	-0.958	-0.882	2.09	8.0	-5.9
High	2476	-1.579	-1.014	1.72	8.0	-6.3

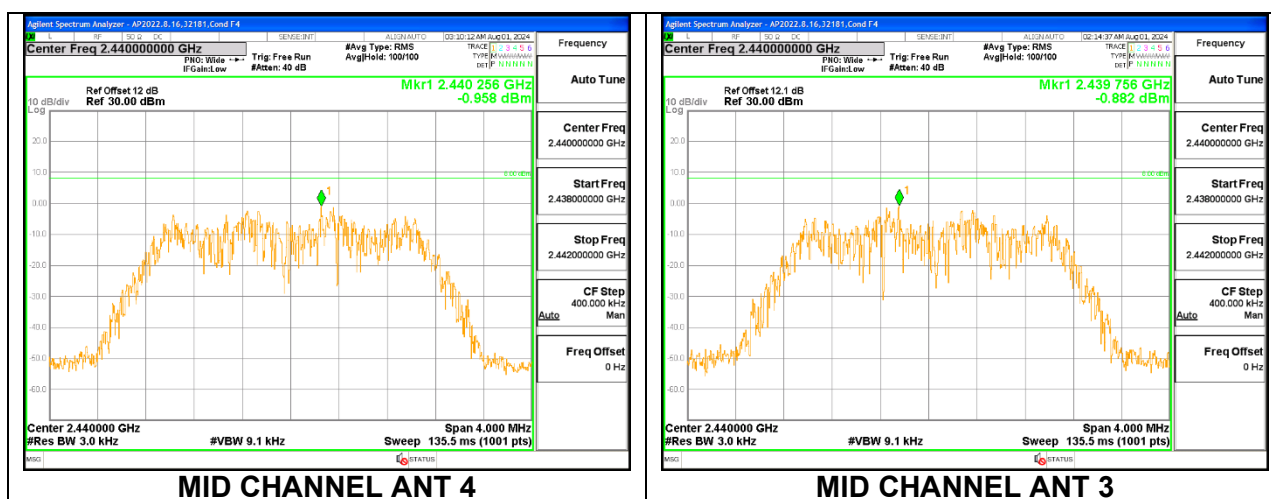

9.6.3. HIGH POWER HDR (HDR8)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-3.884	8	-11.88
Middle	2440	-3.603	8	-11.60
High	2476	-4.140	8	-12.14

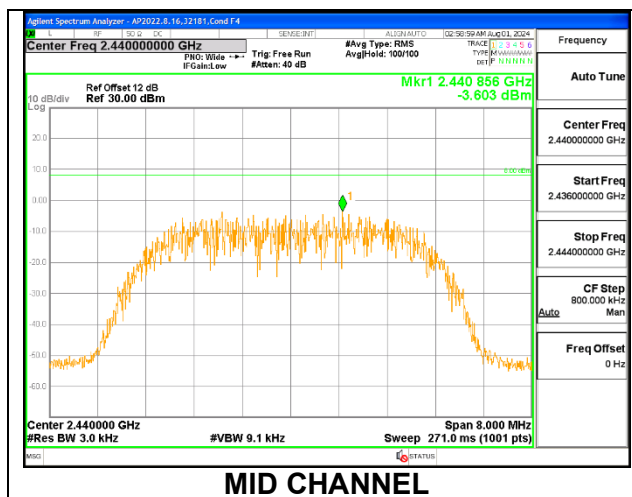

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.285	8	-12.29
Middle	2440	-3.968	8	-11.97
High	2476	-4.391	8	-12.39

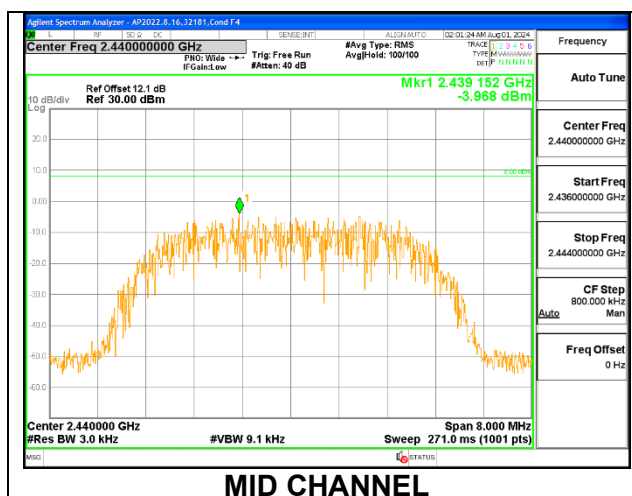


9.6.4. HIGH POWER HDR TXBF (HDR8)

Note: Test procedures and setting are same as HDR normal mode.

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/ 3kHz)	ANT 3 Meas (dBm/ 3kHz)	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
Low	2404	-3.861	-4.299	-1.06	8.0	-9.1
Mid	2440	-4.171	-3.894	-1.02	8.0	-9.0
High	2476	-4.122	-4.023	-1.06	8.0	-9.1

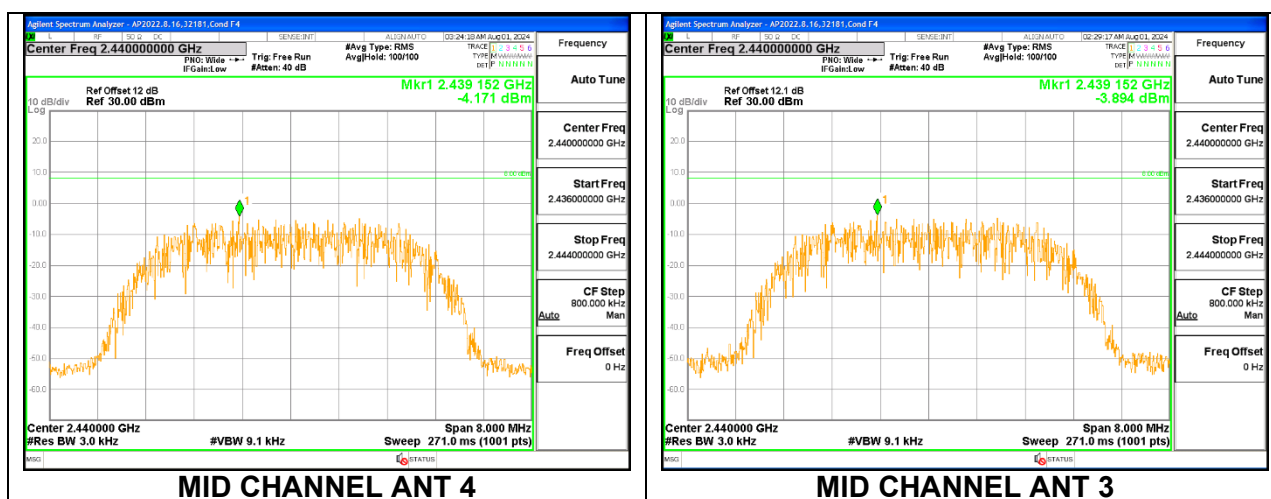

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dBc.


RESULTS

ANT 3

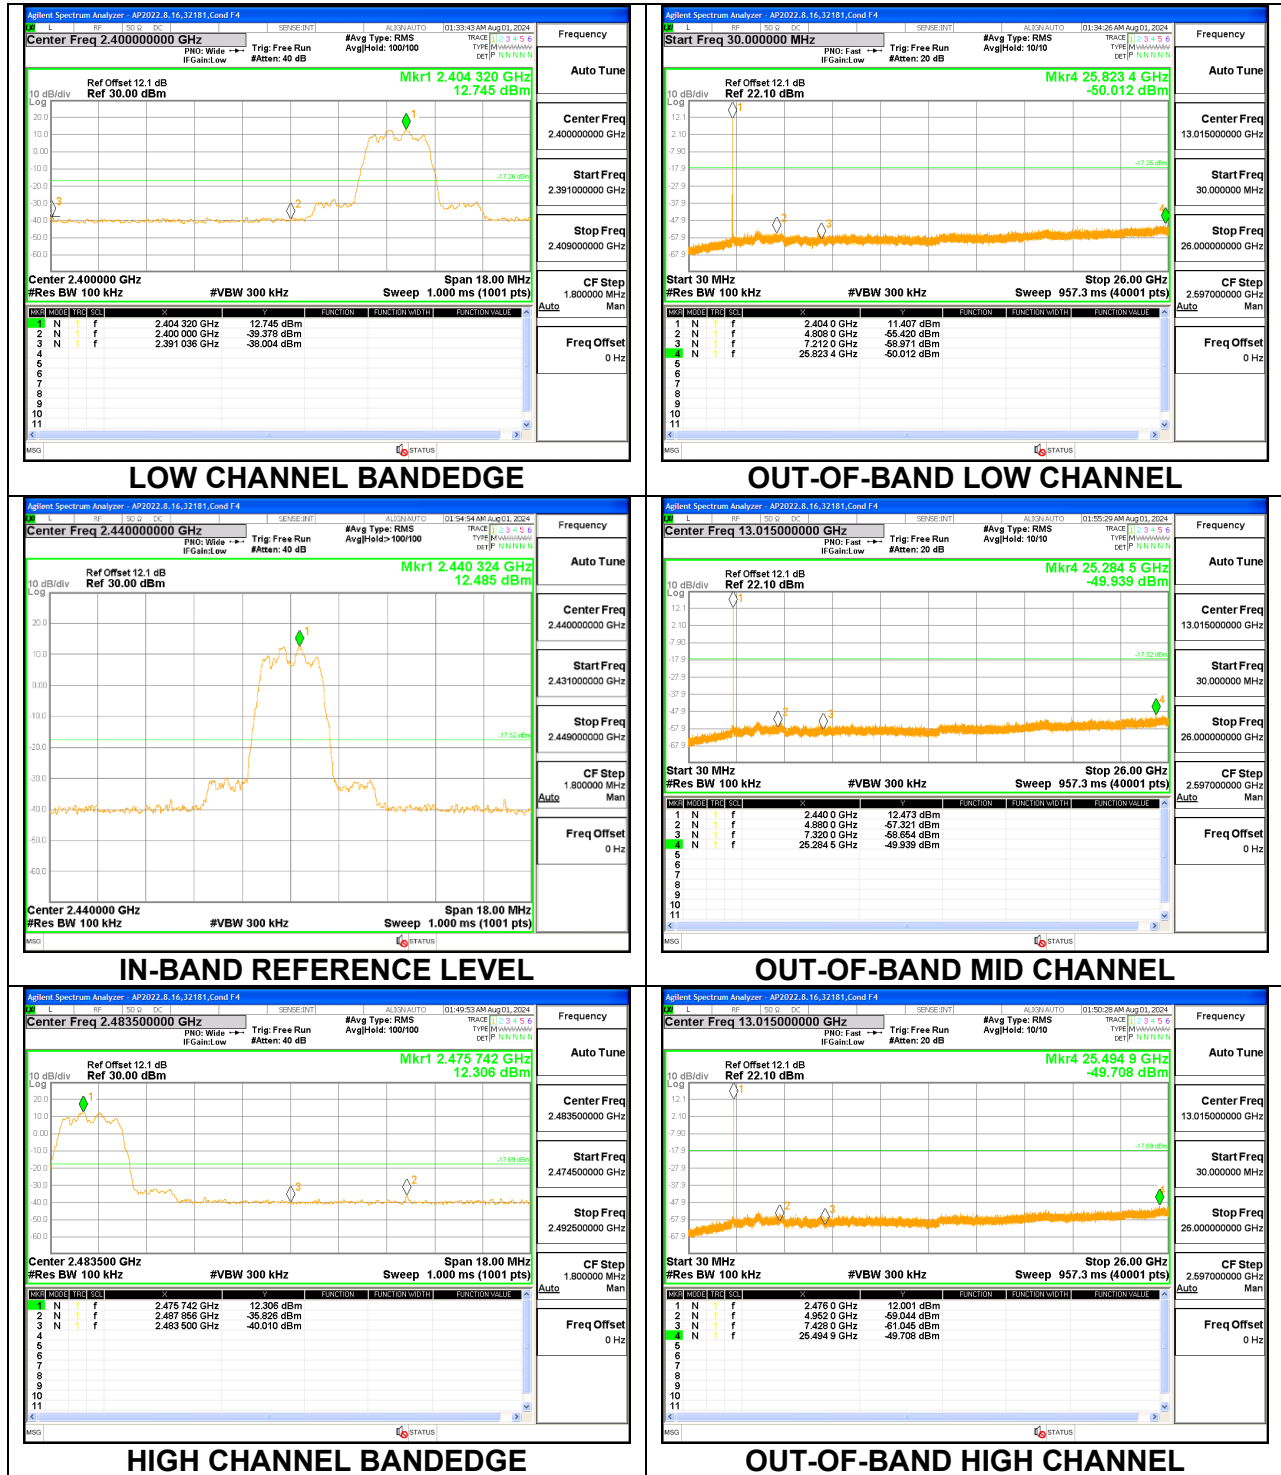


9.7.2. HIGH POWER HDR TXBF (HDR4)


ANT 4

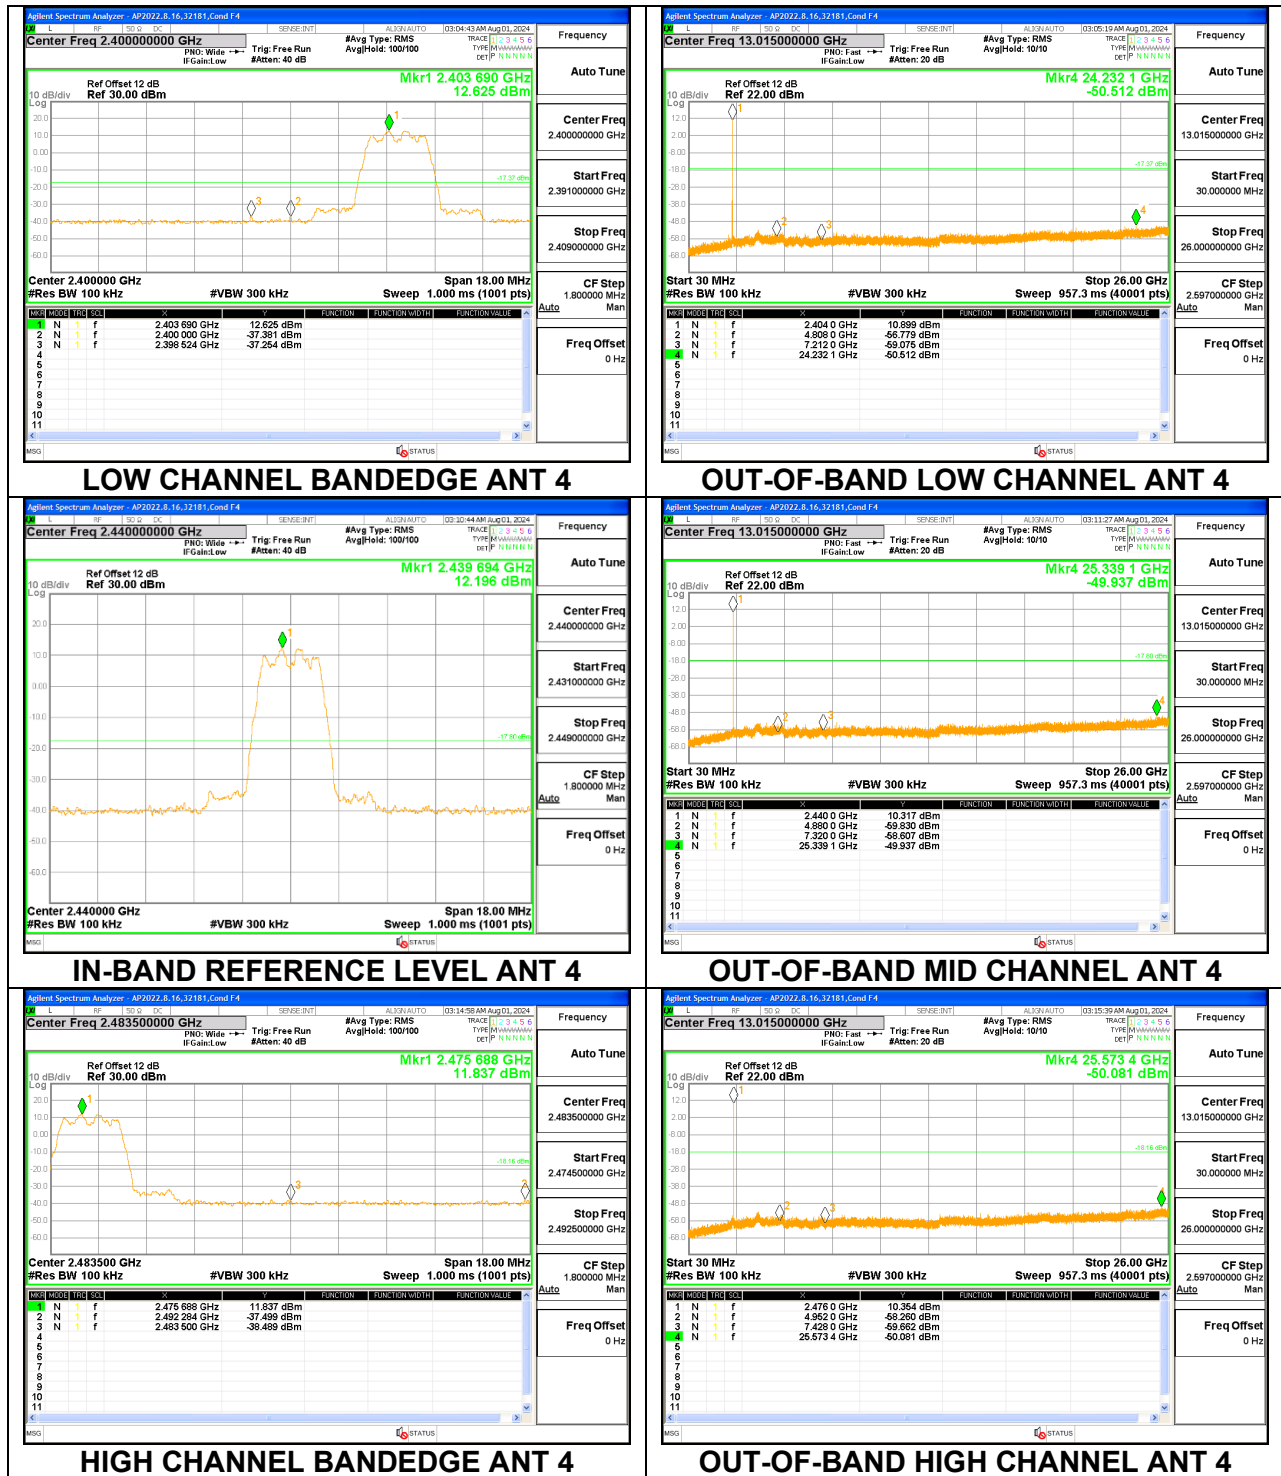


ANT 3

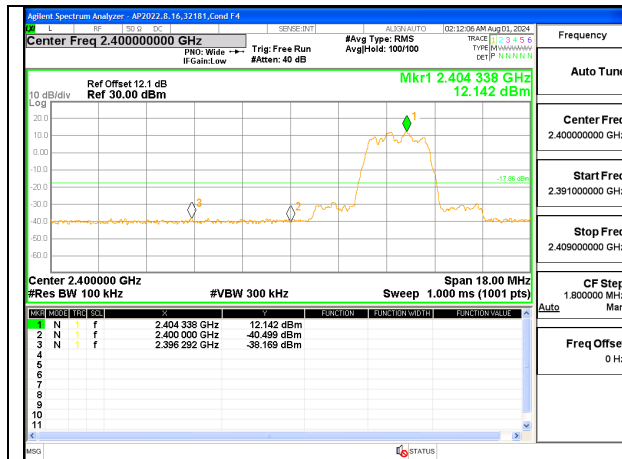


LOW CHANNEL BANDEDGE ANT 3

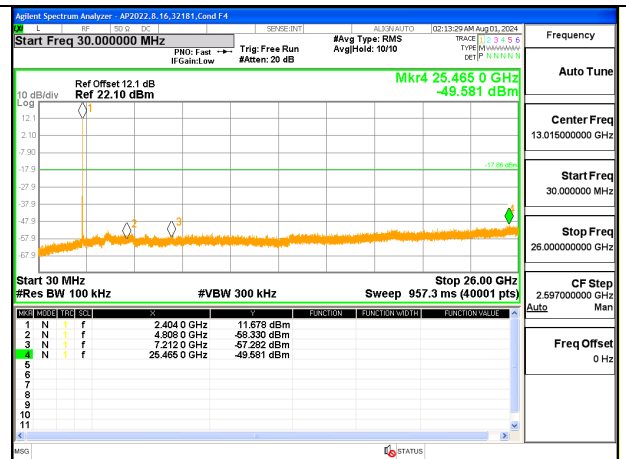


OUT-OF-BAND LOW CHANNEL ANT 3

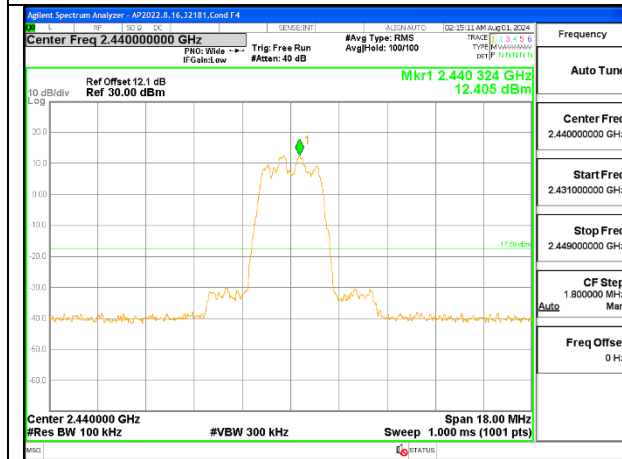


IN-BAND REFERENCE LEVEL ANT 3

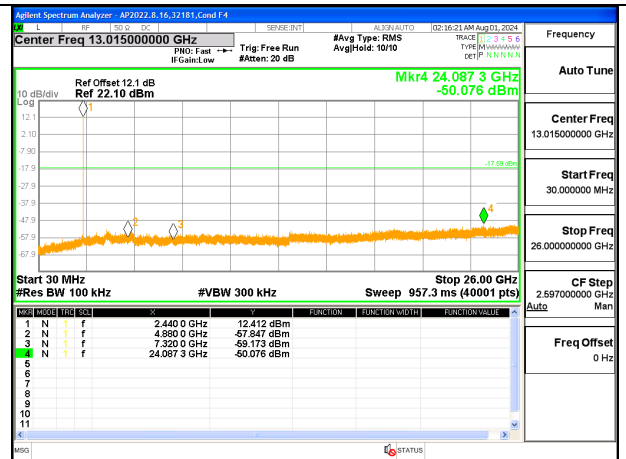

OUT-OF-BAND MID CHANNEL ANT 3

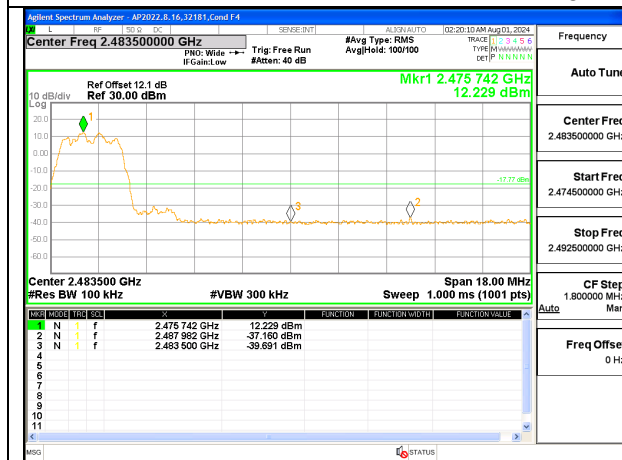


HIGH CHANNEL BANDEDGE ANT 3

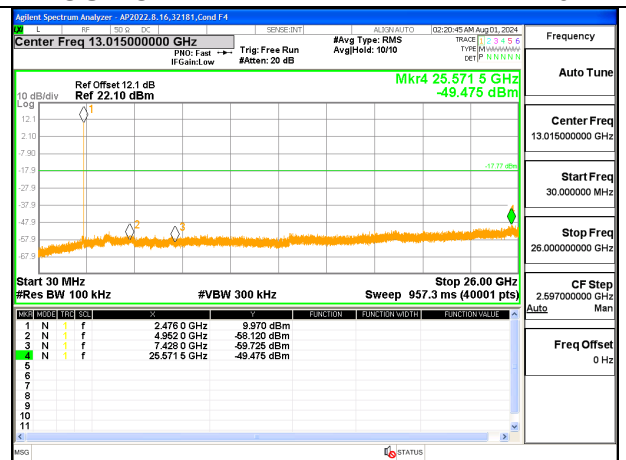


OUT-OF-BAND HIGH CHANNEL ANT 3

ANT 3

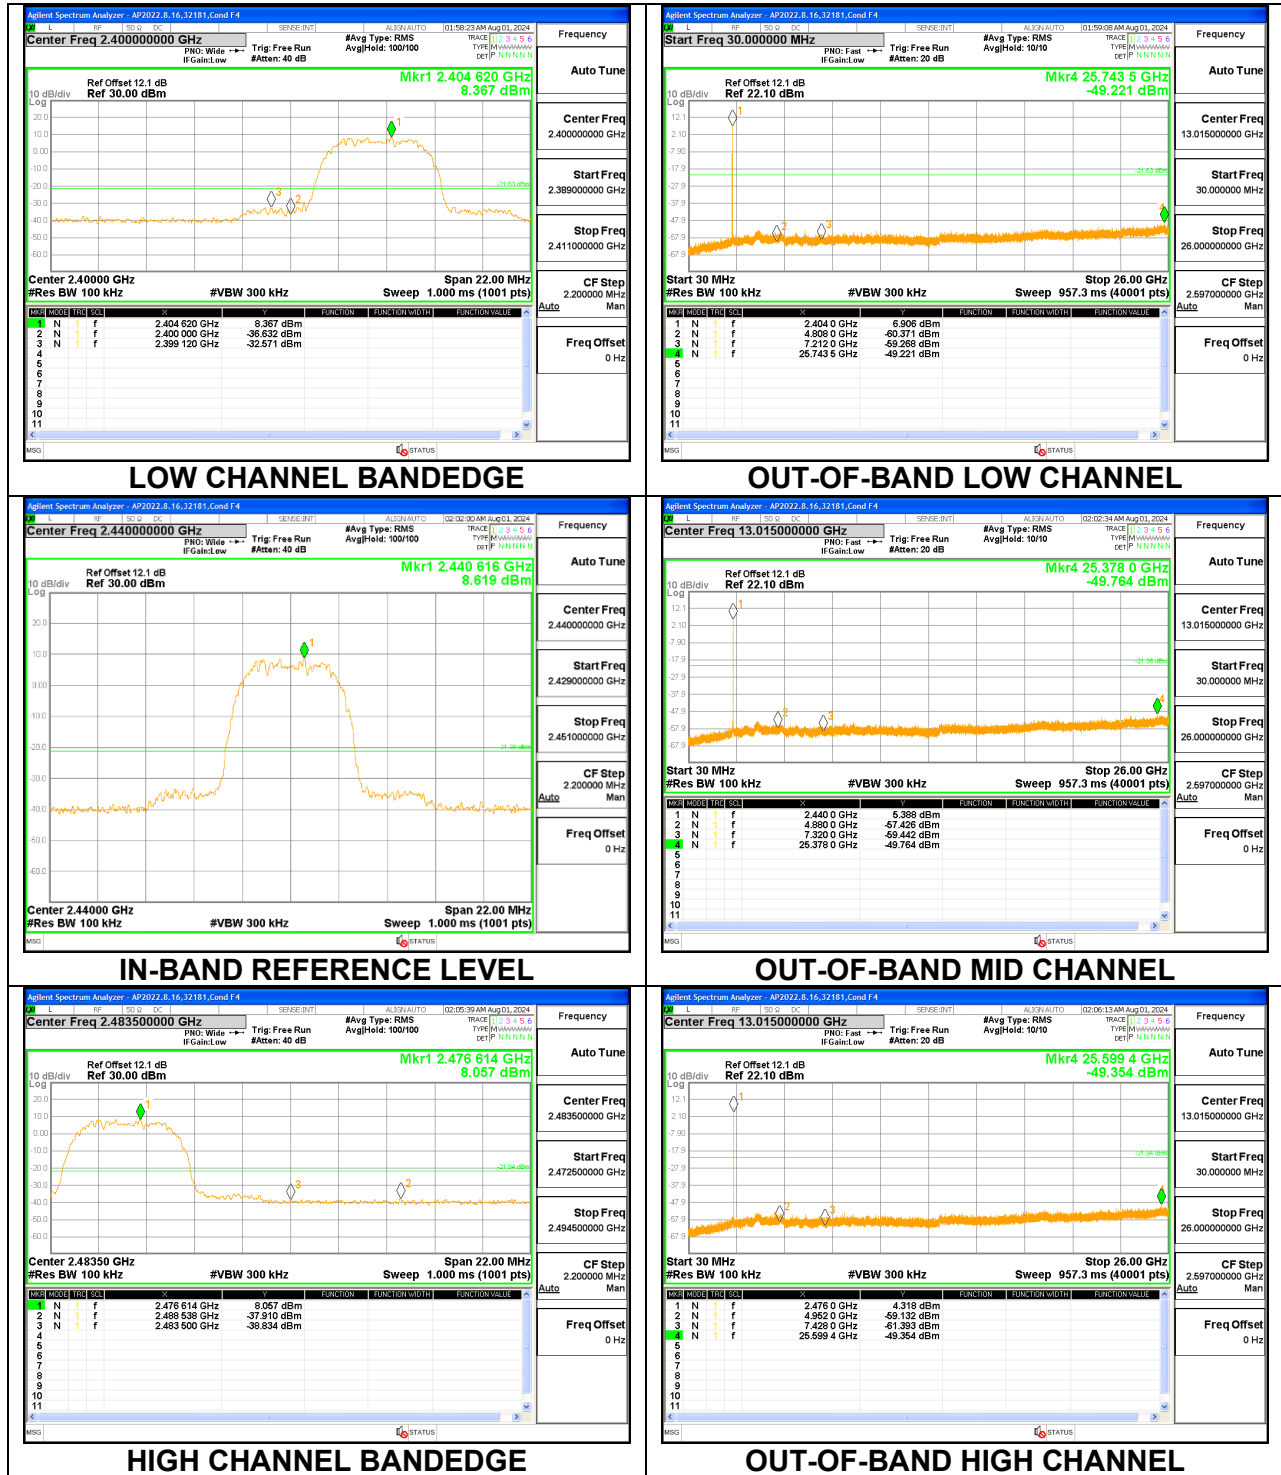


9.7.4. HIGH POWER HDR TXBF (HDR8)


ANT 4

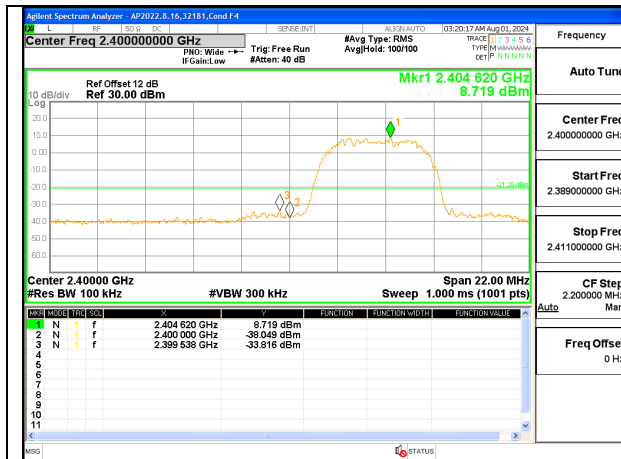


LOW CHANNEL BANDEDGE ANT 4

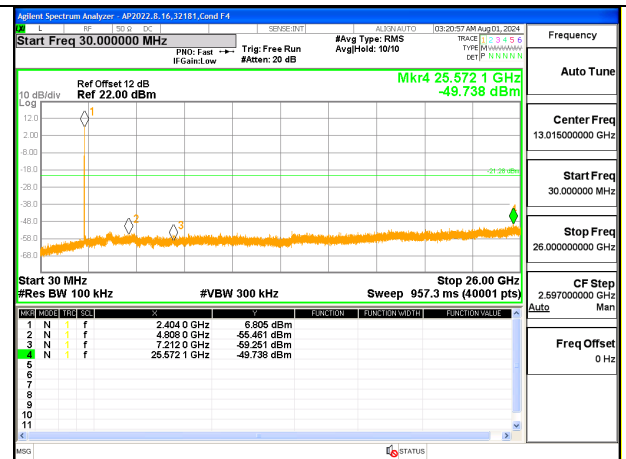


OUT-OF-BAND LOW CHANNEL ANT 4

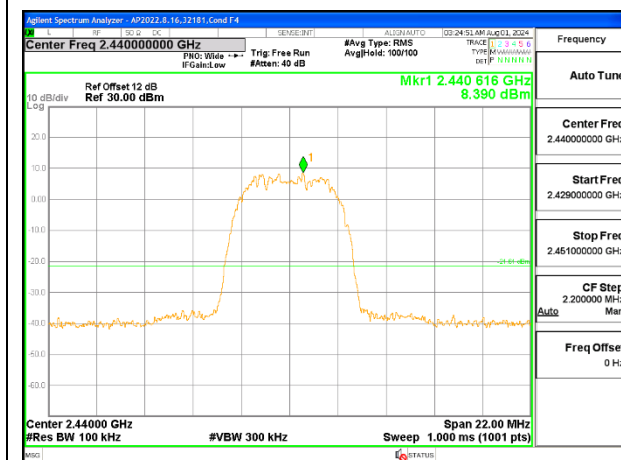


IN-BAND REFERENCE LEVEL ANT 4

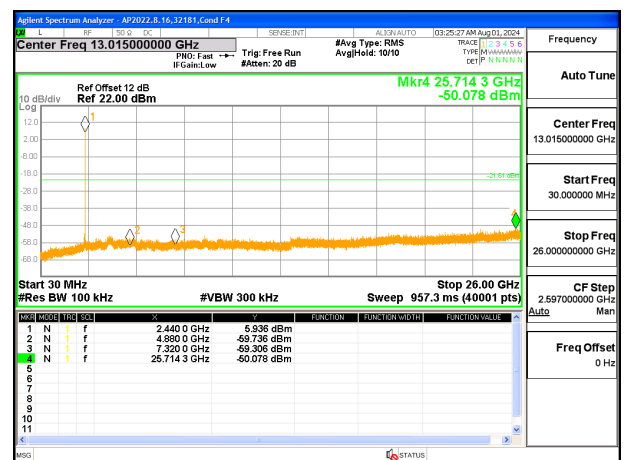







OUT-OF-BAND MID CHANNEL ANT 4

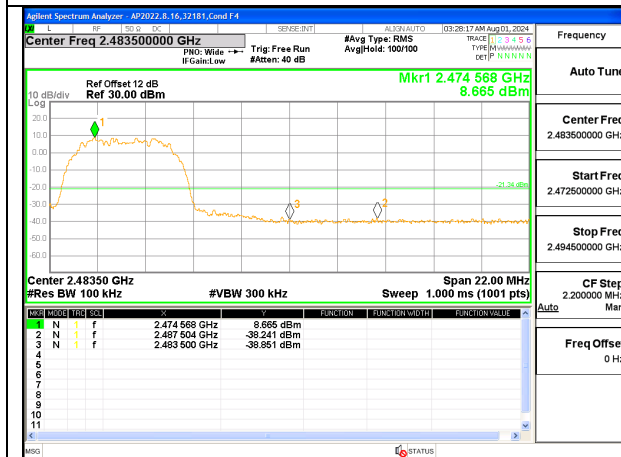

HIGH CHANNEL BANDEDGE ANT 4

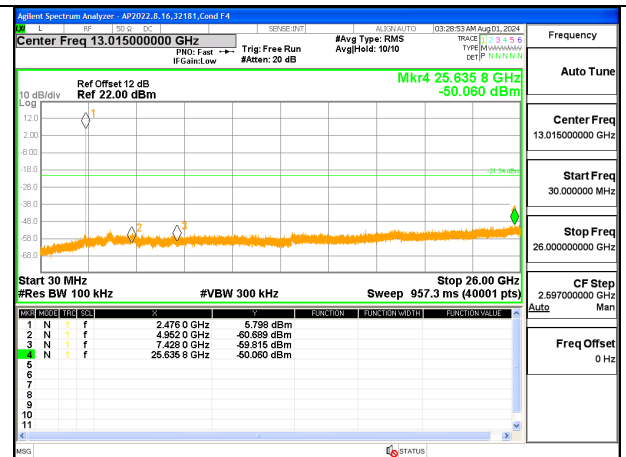


OUT-OF-BAND HIGH CHANNEL ANT 4

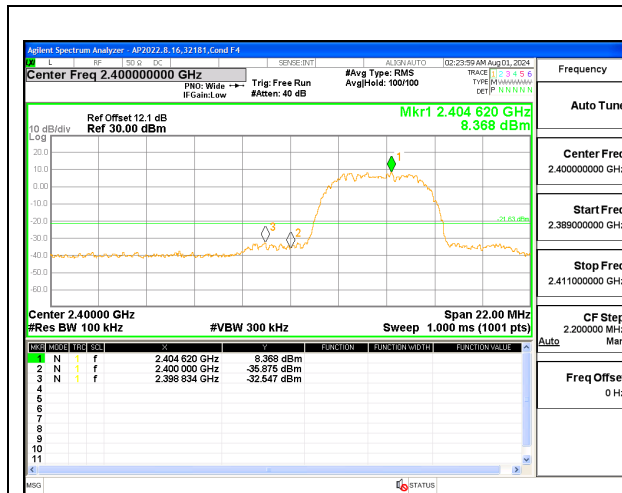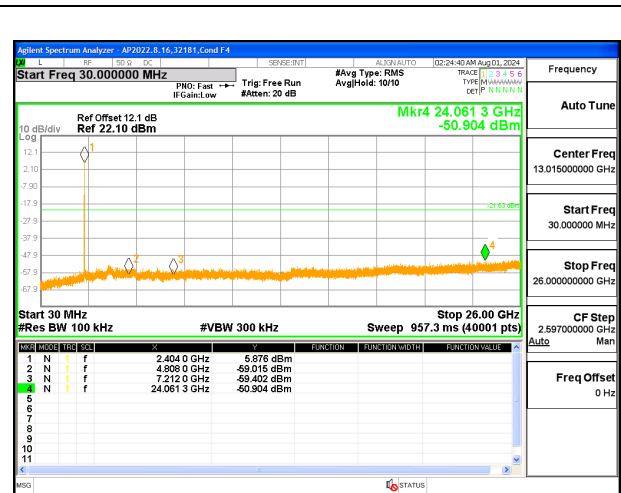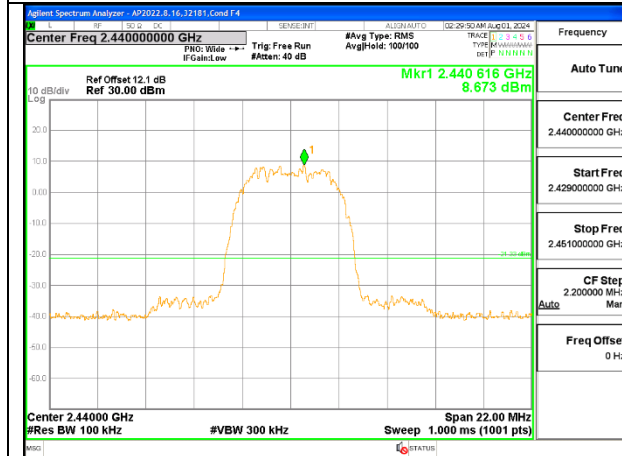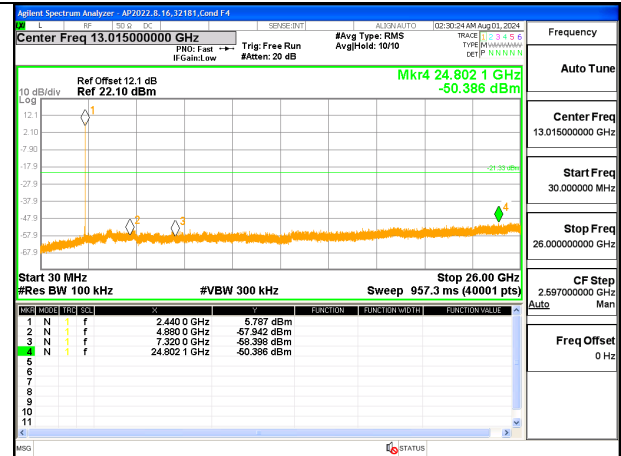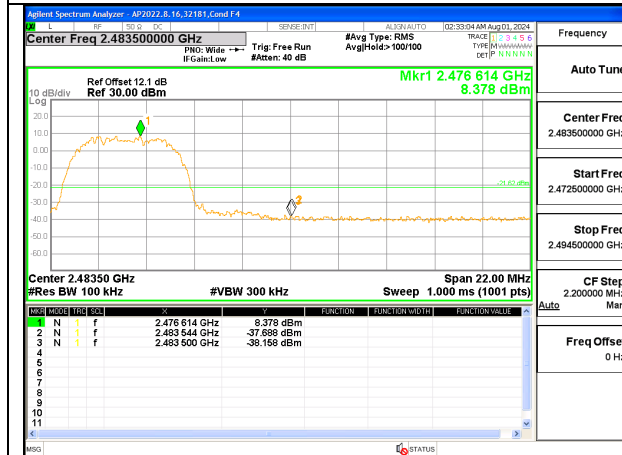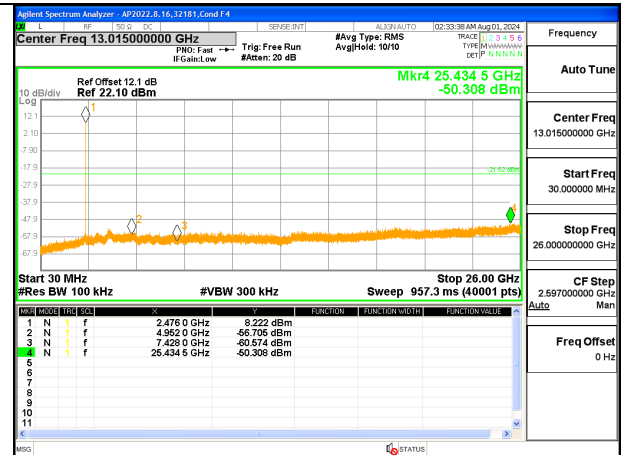
ANT 3**LOW CHANNEL BANDEDGE ANT 3****OUT-OF-BAND LOW CHANNEL ANT 3****IN-BAND REFERENCE LEVEL ANT 3****OUT-OF-BAND MID CHANNEL ANT 3****HIGH CHANNEL BANDEDGE ANT 3****OUT-OF-BAND HIGH CHANNEL ANT 3**

9.7.5. LOW POWER HDR (HDR4)

ANT 4

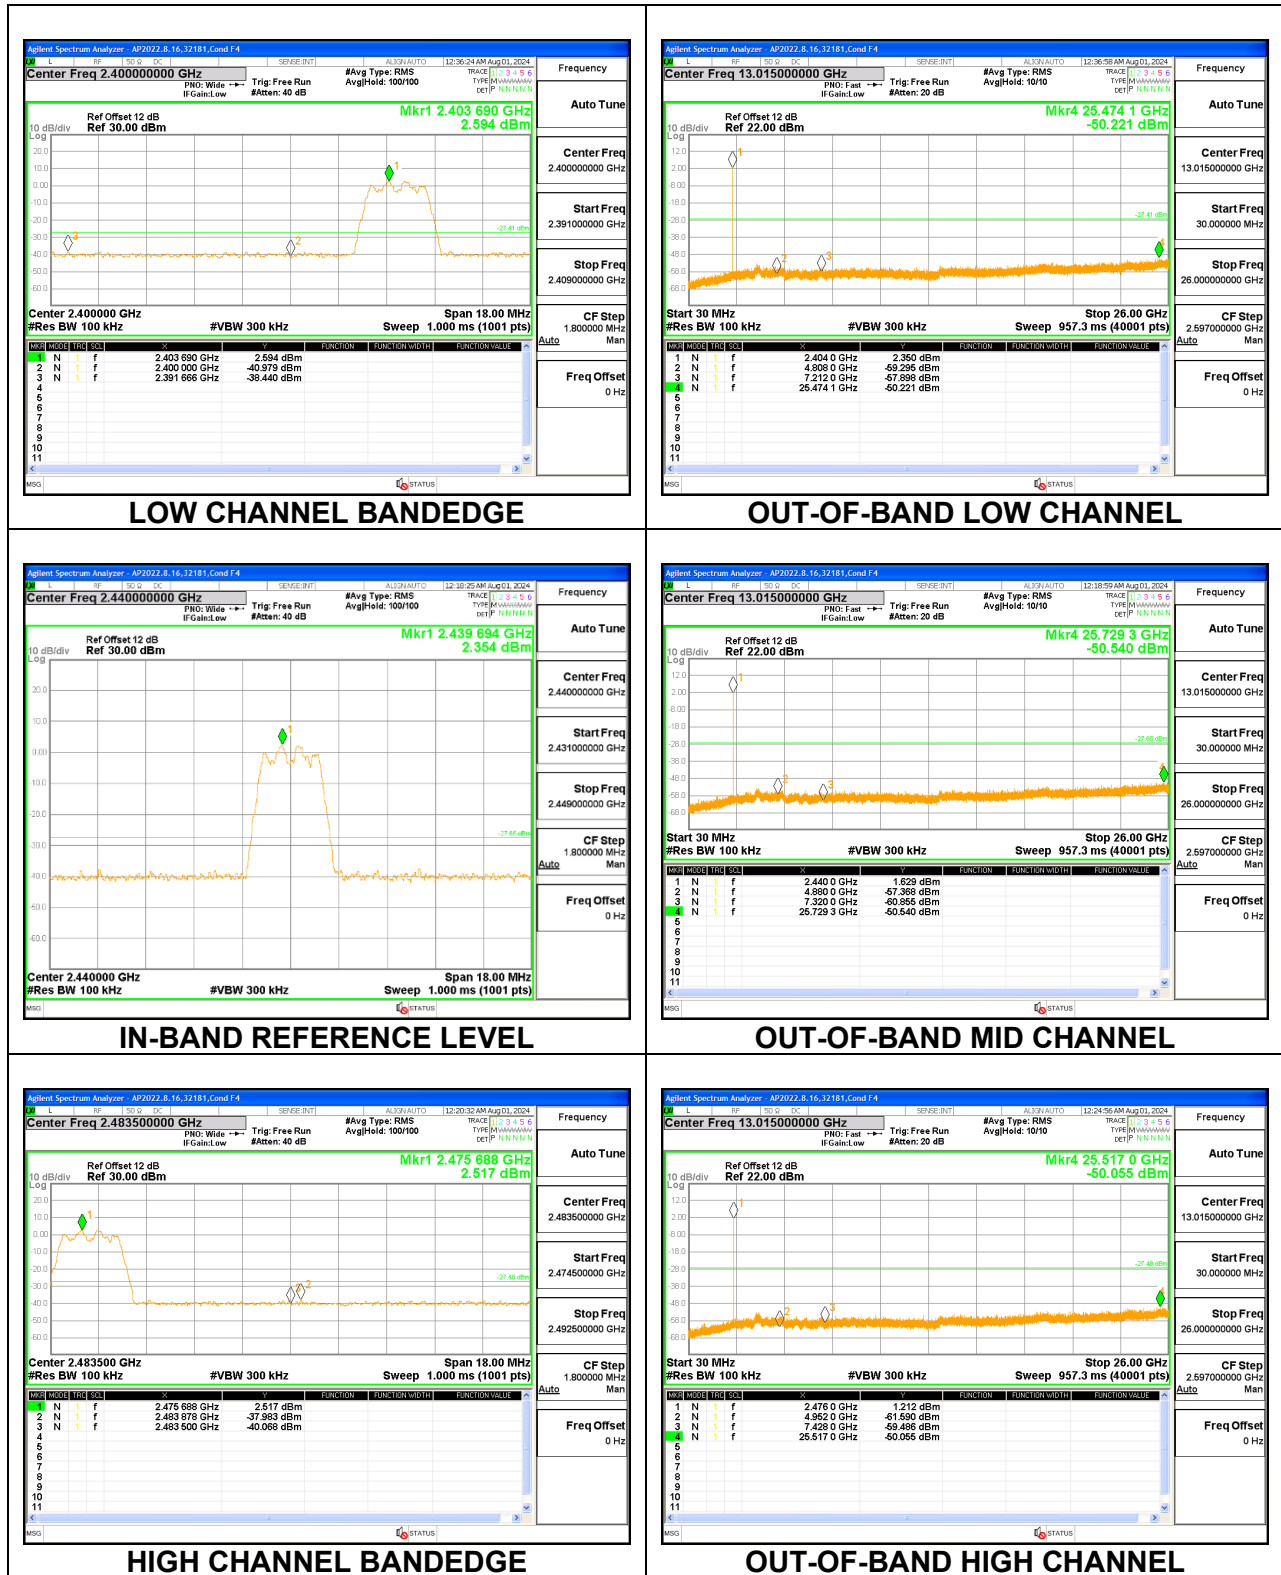


ANT 3

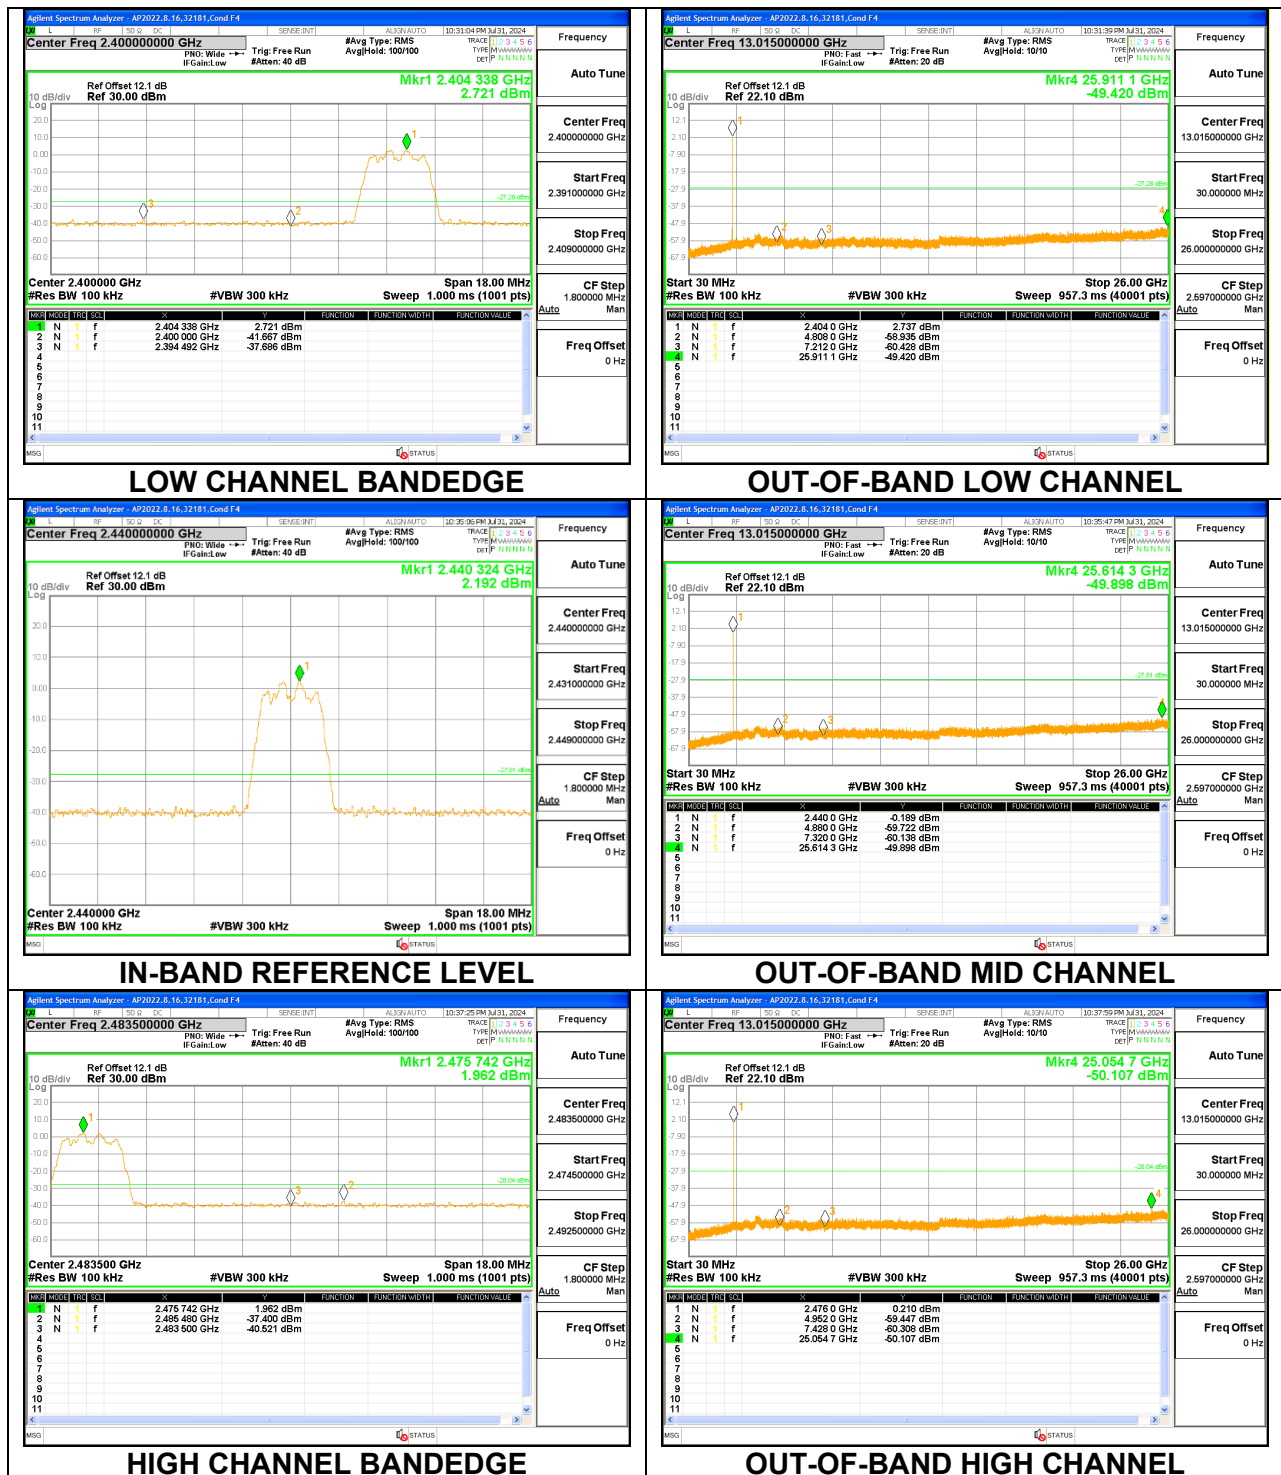


9.7.6. LOW POWER HDR TXBF (HDR4)


ANT 4

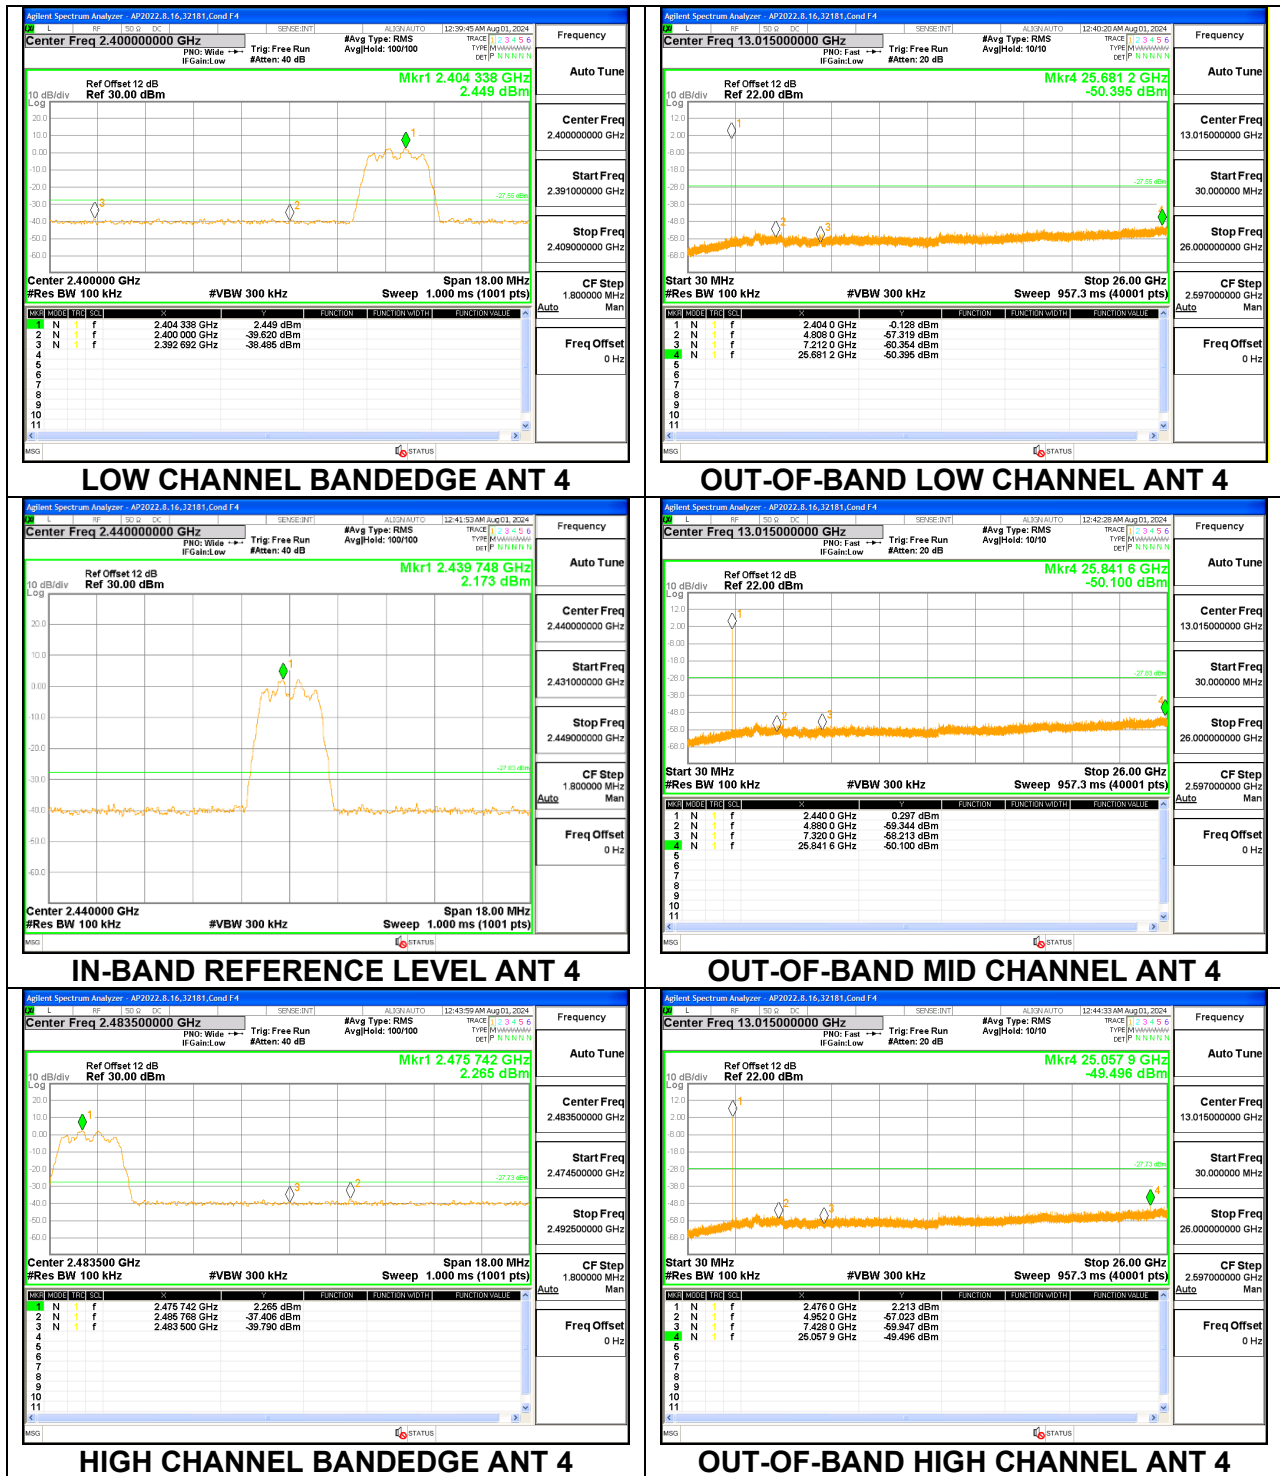


ANT 3

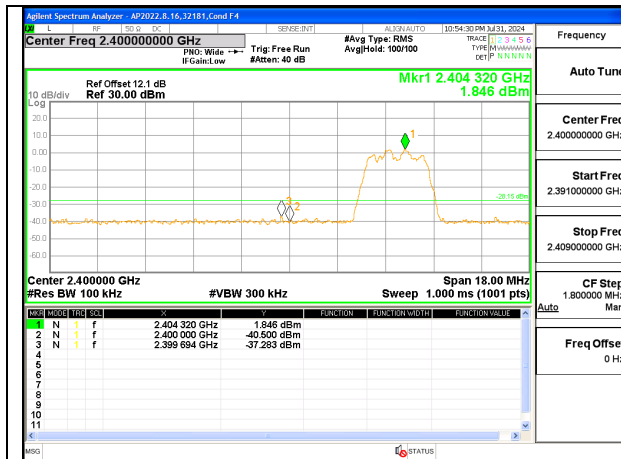


LOW CHANNEL BANDEDGE ANT 3

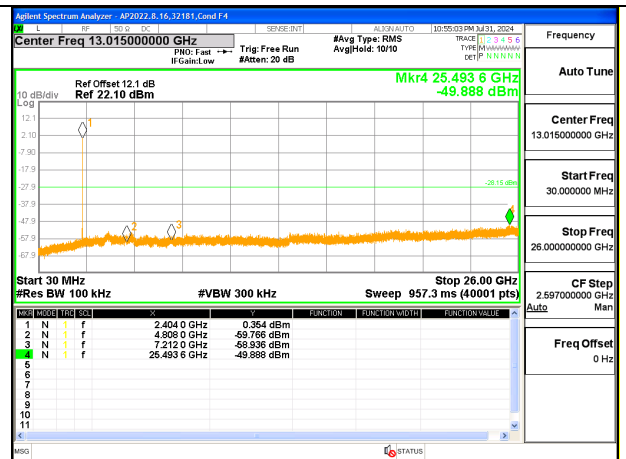


OUT-OF-BAND LOW CHANNEL ANT 3

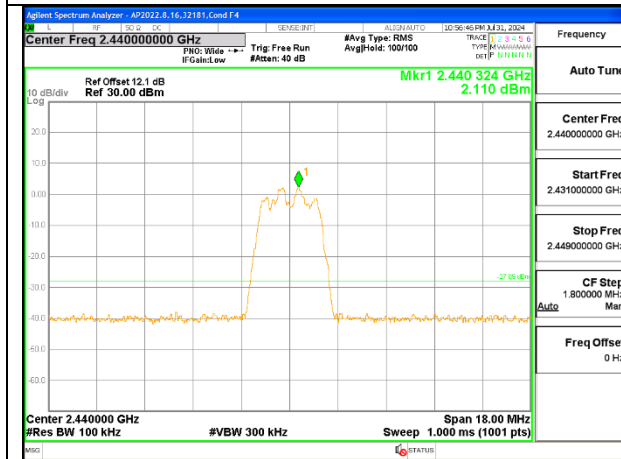


IN-BAND REFERENCE LEVEL ANT 3

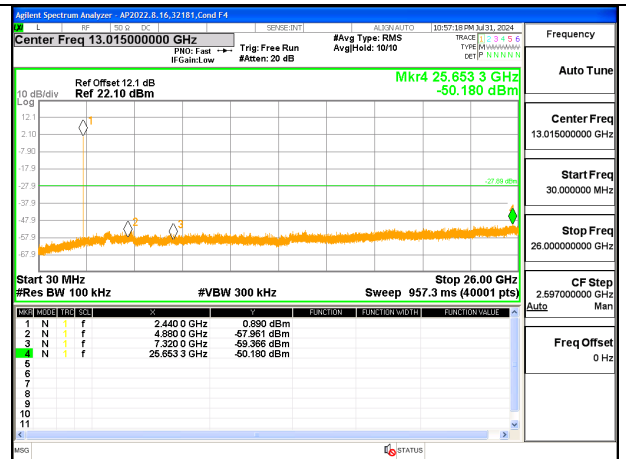

OUT-OF-BAND MID CHANNEL ANT 3

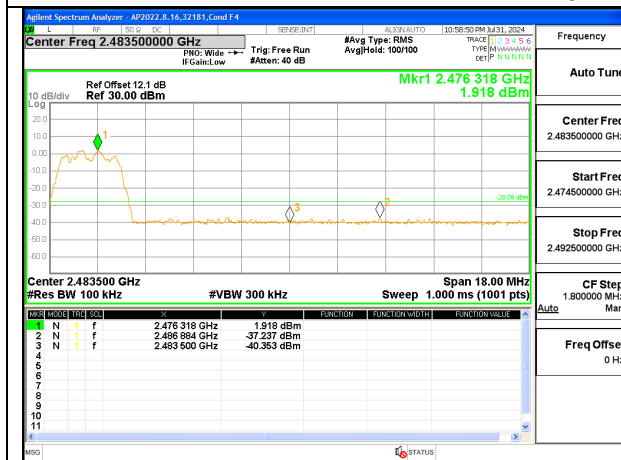

HIGH CHANNEL BANDEDGE ANT 3

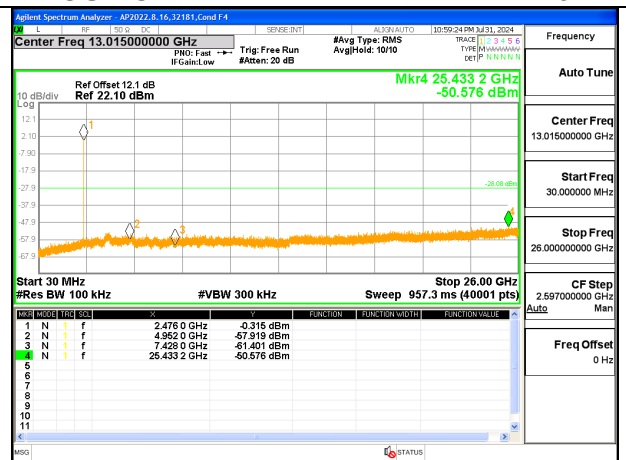

OUT-OF-BAND HIGH CHANNEL ANT 3