
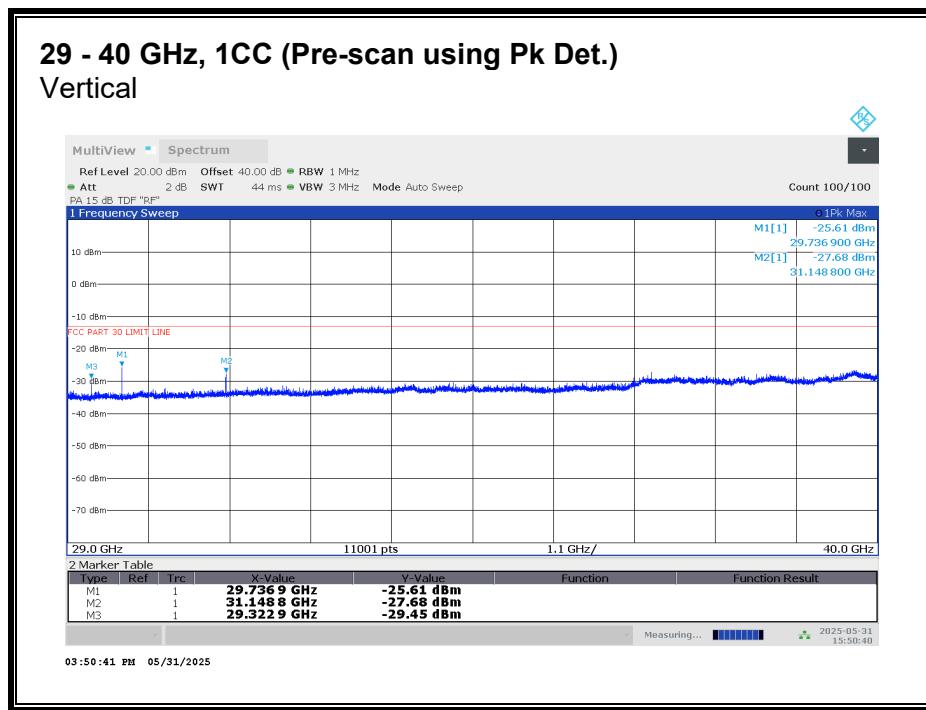


8.4.25. RSE n261 29 - 40 GHz


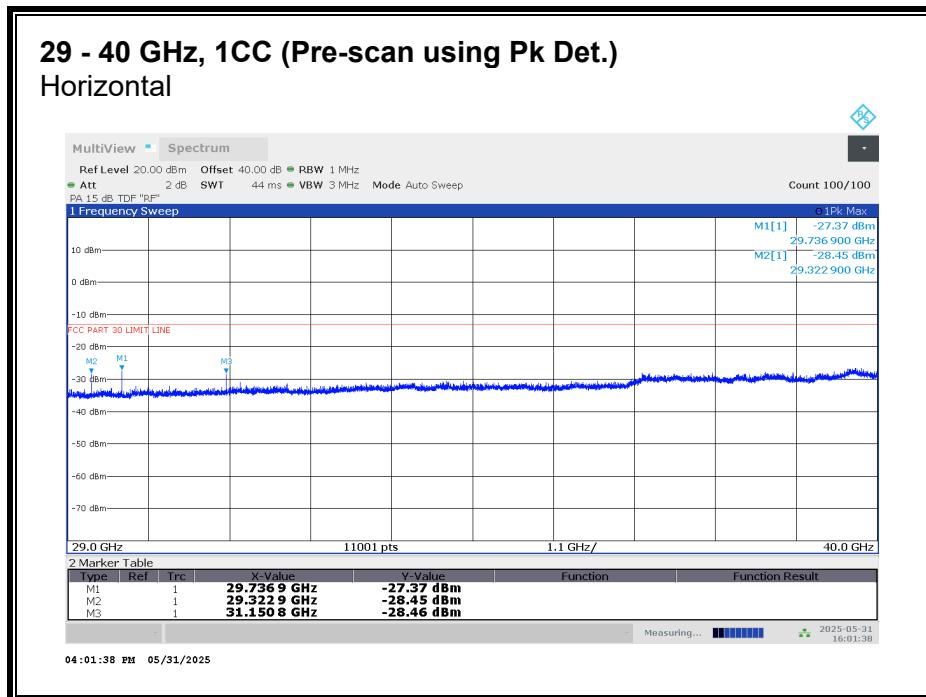


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

29 - 40 GHz n261, 1CC



Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
29.737	3	H	-36.17	-13	-23.17
29.737	3	V	-19.70	-13	-6.70
29.323	3	H	-35.79	-13	-22.79
29.323	3	V	-33.07	-13	-20.07
31.149	3	H	-40.97	-13	-27.97
31.149	3	V	-36.46	-13	-23.46

8.4.26. RSE n261 40 - 50 GHz

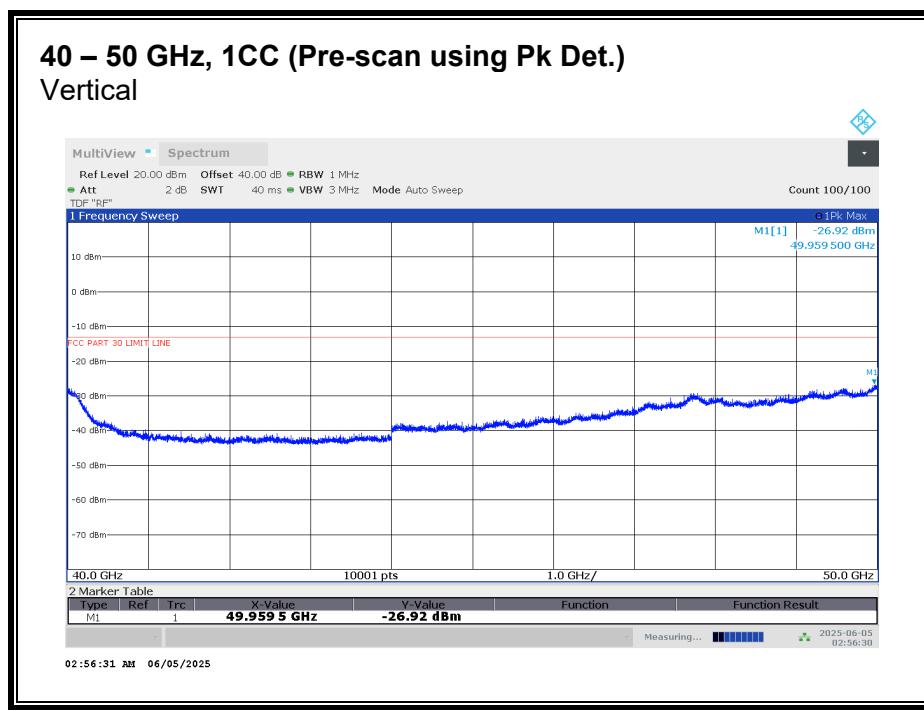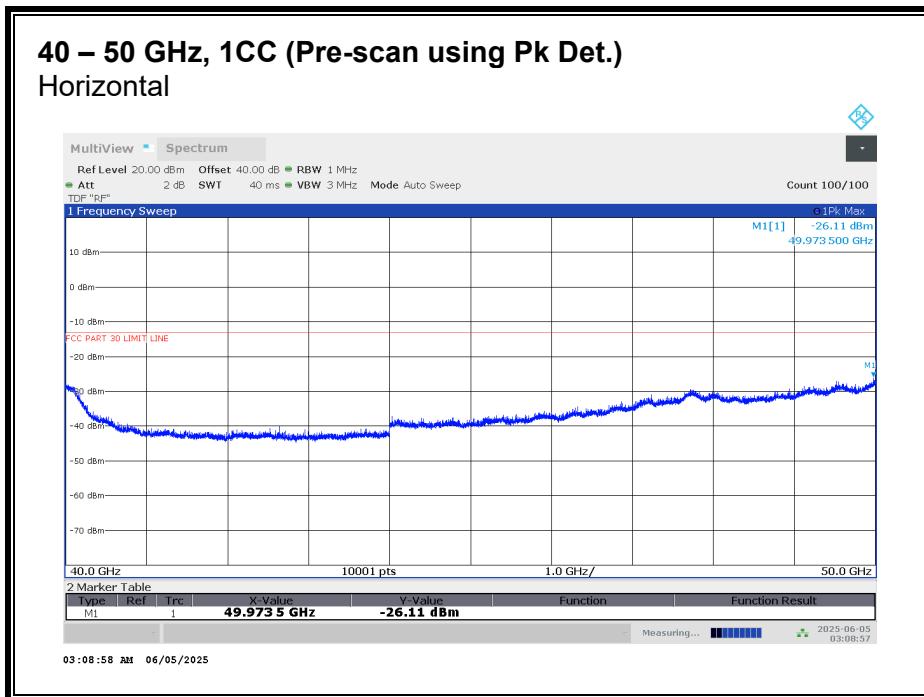

No emission detected using Peak Detection.

8.4.27. RSE n261 50 - 75 GHz

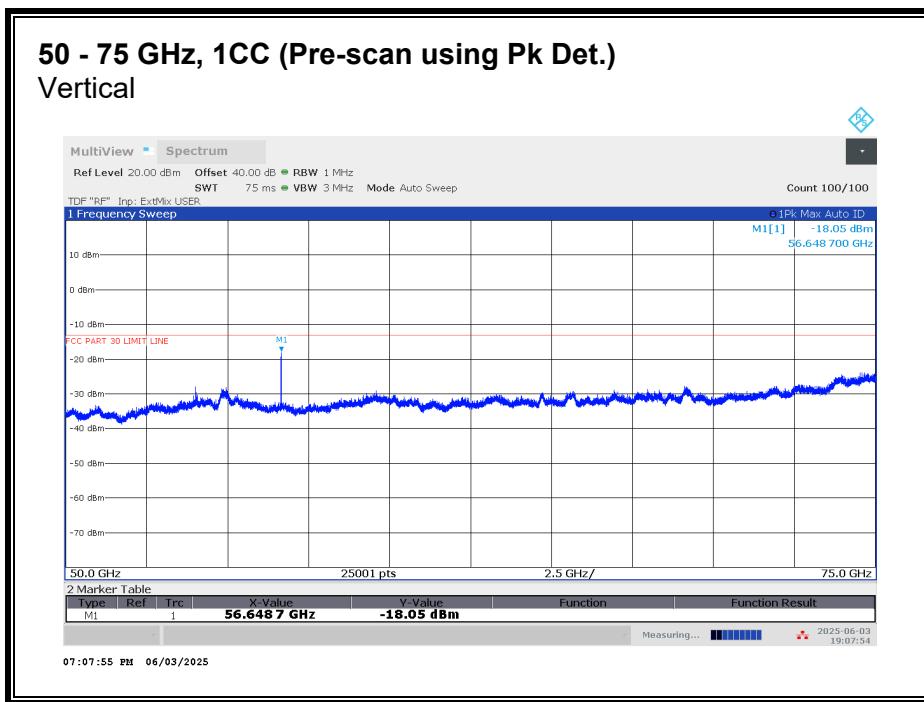
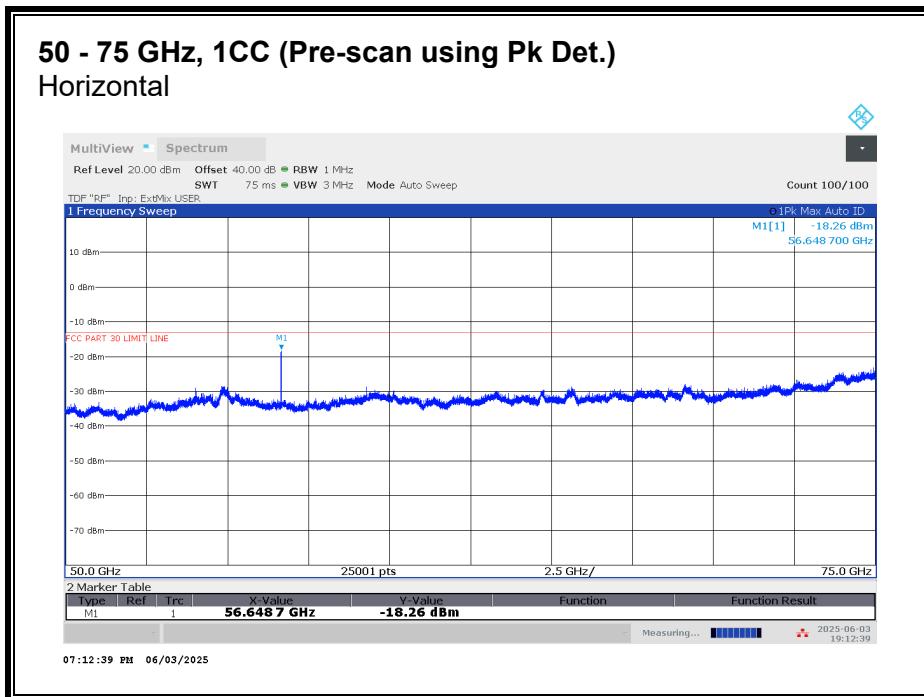


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

50 - 75 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
56.648	3	H	-20.39	-13	-7.39
56.648	3	V	-33.29	-13	-20.29

8.4.28. RSE n261 75 - 100 GHz

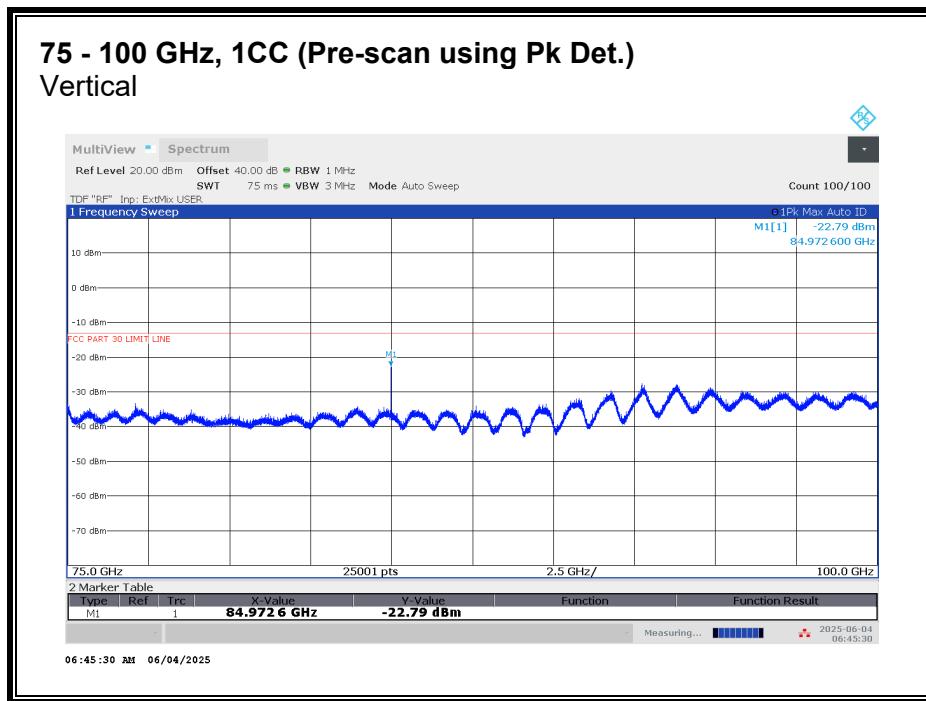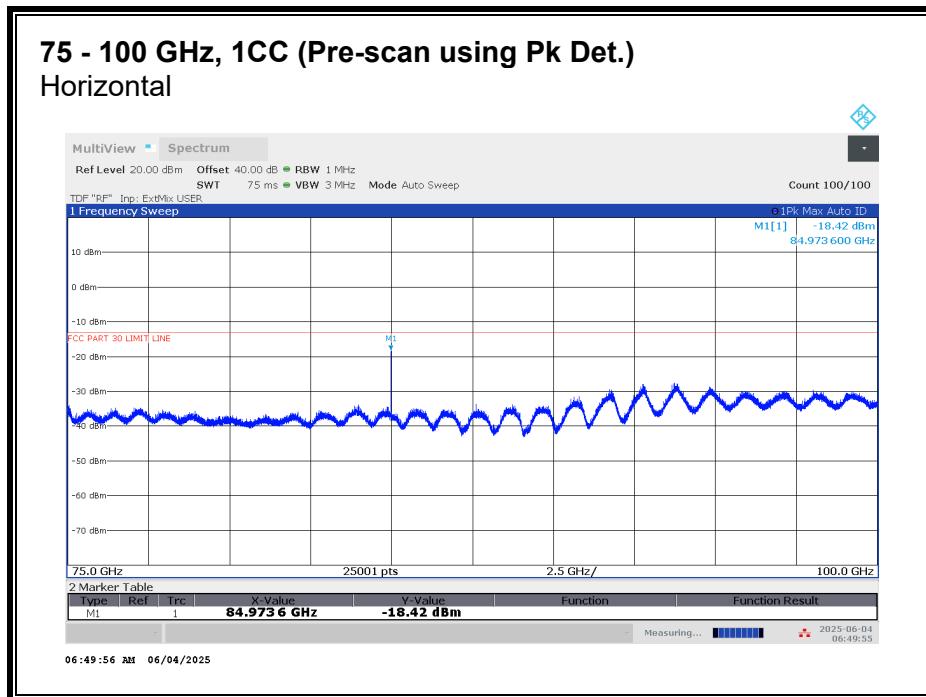


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

75 - 100 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
84.972	3	H	-25.55	-13	-12.55
84.972	3	V	-38.16	-13	-25.16

8.4.29. RSE n260 30 – 1000 MHz

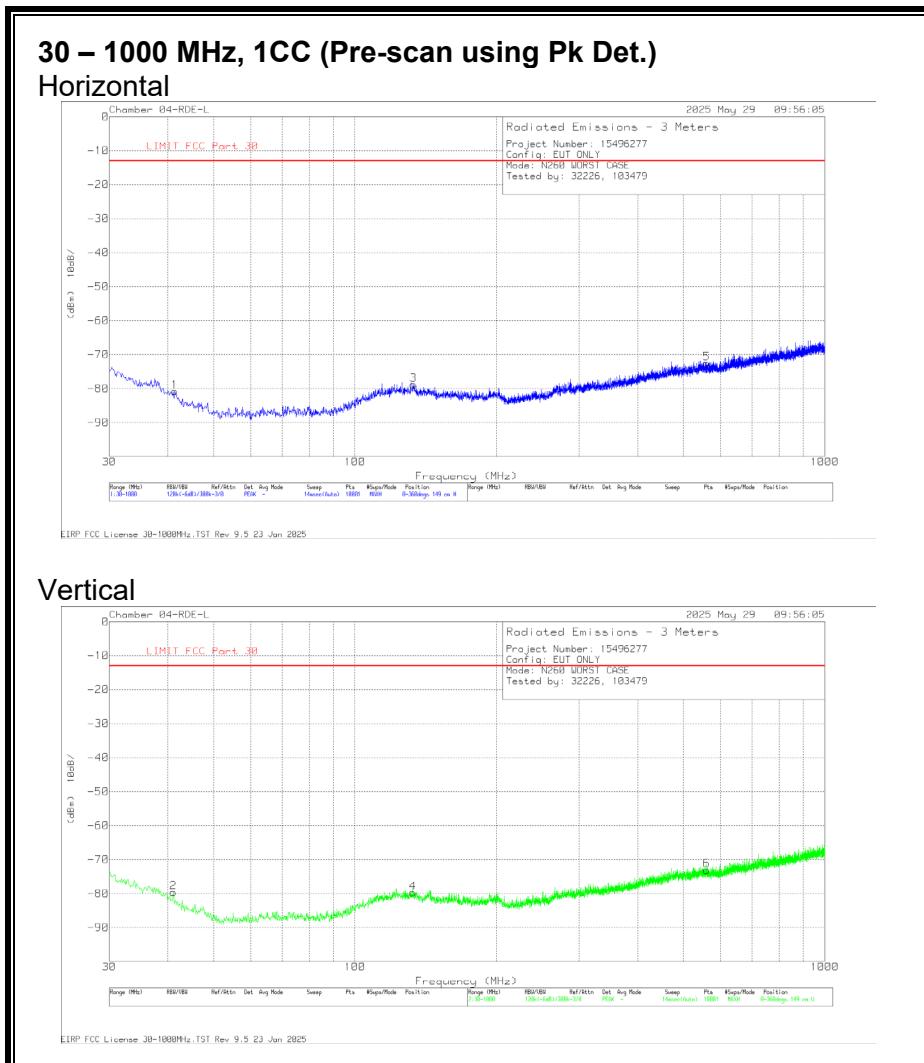


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ACF (dBm)	Amp/CbIs (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	41.349	-79.90	Pk	18.8	-31.4	11.7	-80.8	-13	-67.8	0-360	149	H
3	133.111	-79.48	Pk	19.4	-30.5	11.7	-78.88	-13	-65.88	0-360	149	H
5	560.299	-79.78	Pk	24.4	-28.9	11.7	-72.58	-13	-59.58	0-360	149	H
2	41.058	-79.06	Pk	19.0	-31.3	11.7	-79.66	-13	-66.66	0-360	149	V
4	133.014	-80.38	Pk	19.4	-30.5	11.7	-79.78	-13	-66.78	0-360	149	V
6	559.911	-80.44	Pk	24.4	-28.8	11.7	-73.14	-13	-60.14	0-360	149	V

Pk - Peak detector

8.4.30. RSE n260 1 - 18 GHz


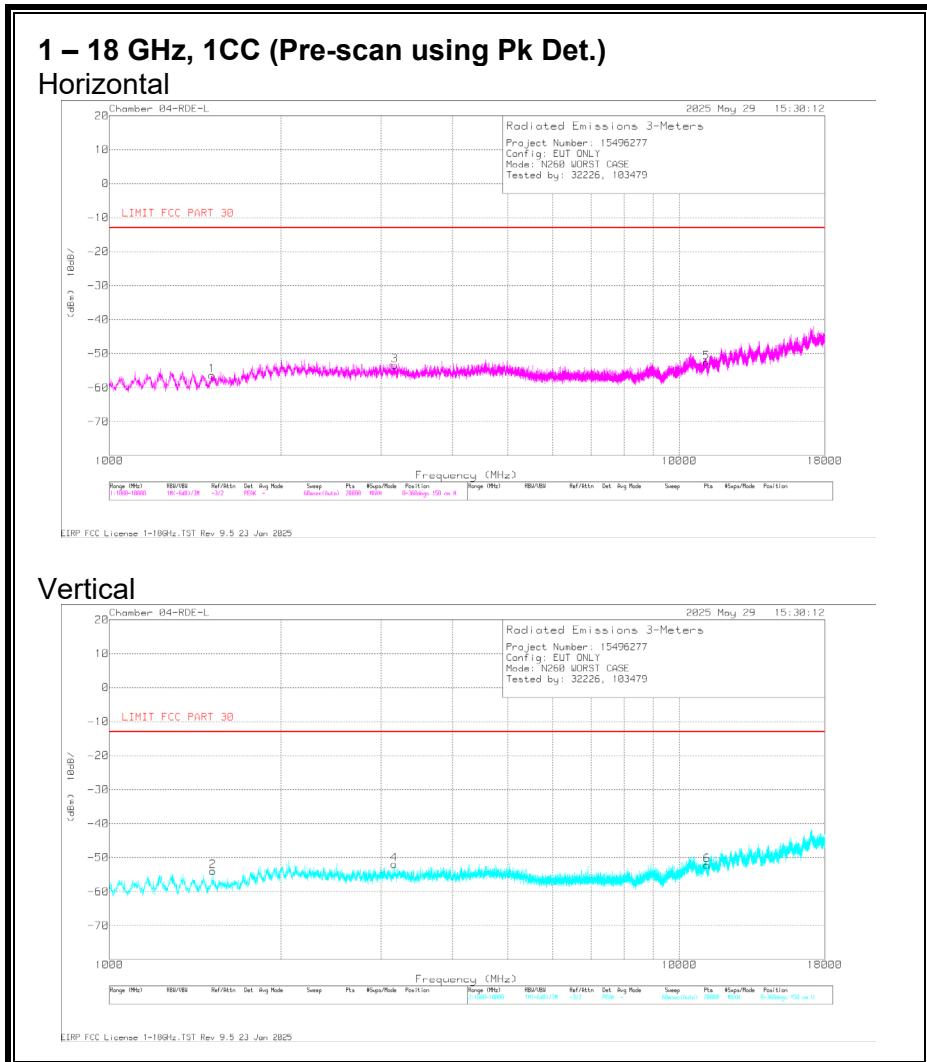


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1515.126	-49.53	Pk	28.4	-46.9	11.7	-56.33	-13	-43.33	0-360	150	H
3	3165.91	-53.12	Pk	32.9	-44.9	11.7	-53.42	-13	-40.42	0-360	150	H
5	11158.014	-68.02	Pk	37.9	-34.2	11.7	-52.62	-13	-39.62	0-360	150	H
2	1519.376	-47.35	Pk	28.4	-46.7	11.7	-53.95	-13	-40.95	0-360	150	V
4	3159.959	-51.54	Pk	32.9	-45.0	11.7	-51.94	-13	-38.94	0-360	150	V
6	11180.965	-67.36	Pk	37.9	-34.5	11.7	-52.26	-13	-39.26	0-360	150	V

Pk - Peak detector


8.4.31. RSE n260 18 - 26.5 GHz

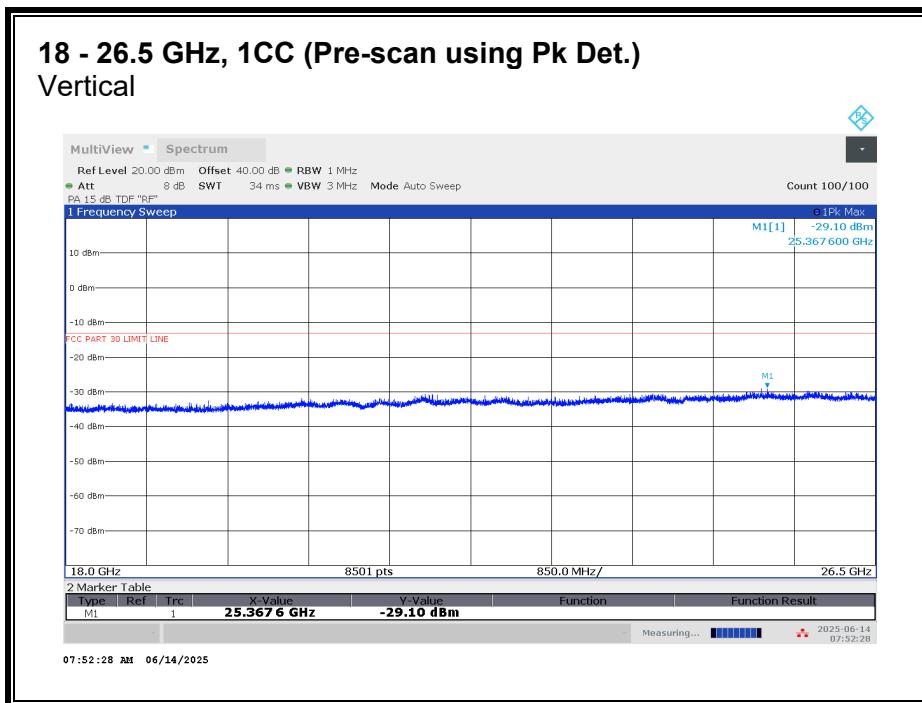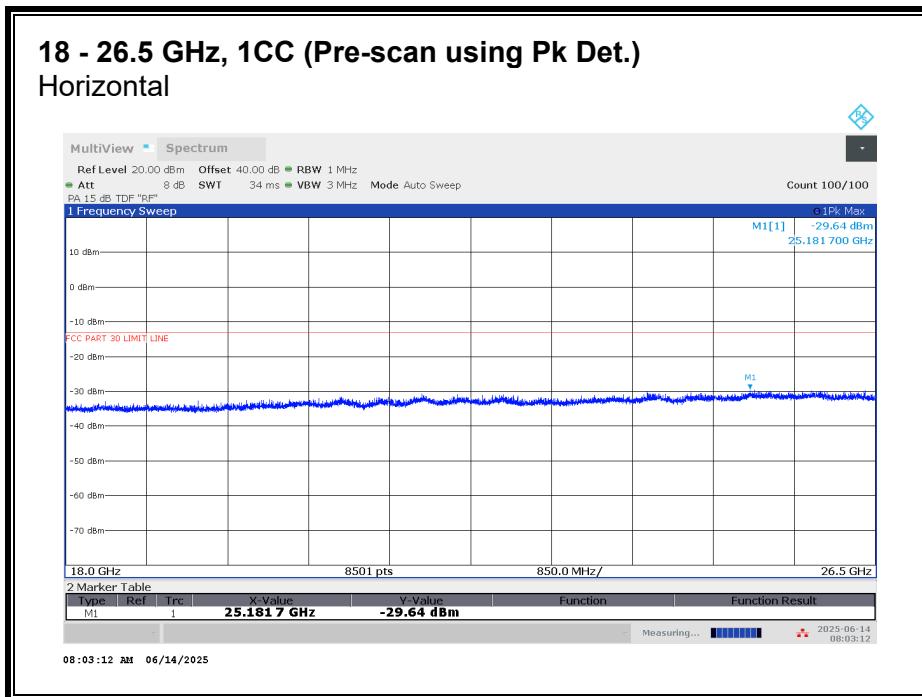


No emission detected using Peak Detection.

8.4.32. RSE n260 26.5 - 36 GHz

26.5 - 36GHz, 1CC (Pre-scan using Pk Det.) Horizontal


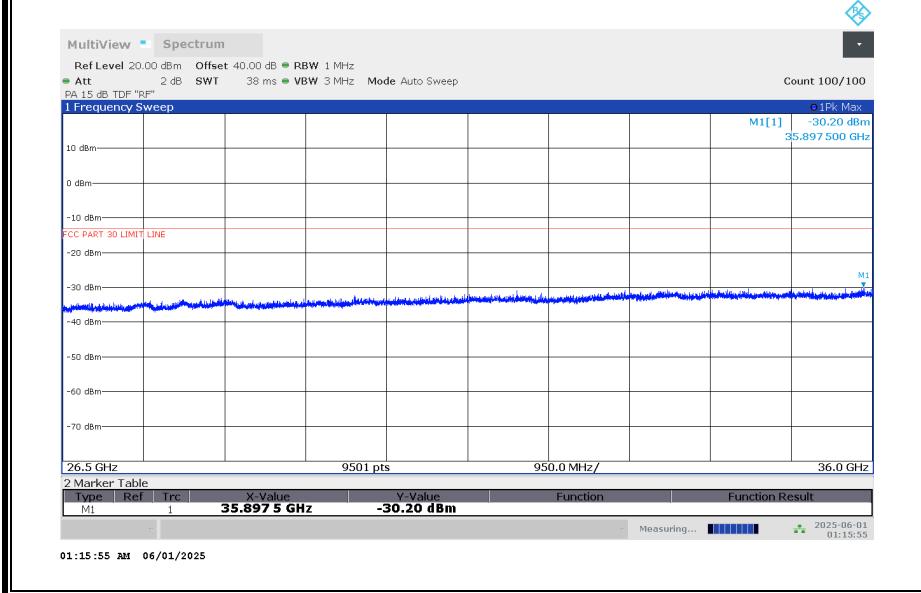


26.5 - 36 GHz, 1CC (Pre-scan using Pk Det.) Vertical

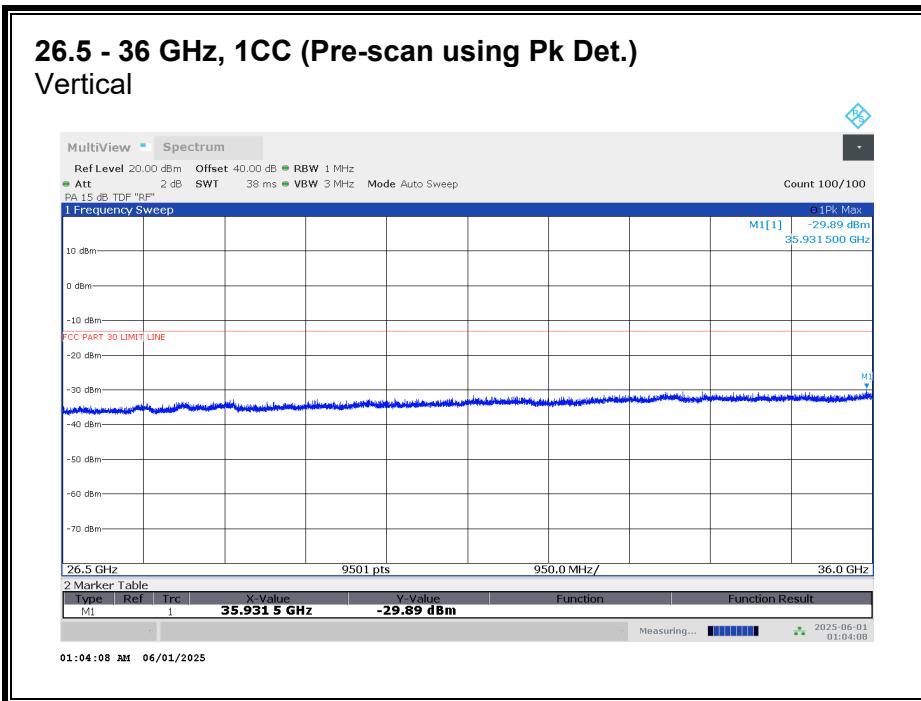

No emission detected using Peak Detection.

8.4.33. RSE n260 36 – 37 GHz

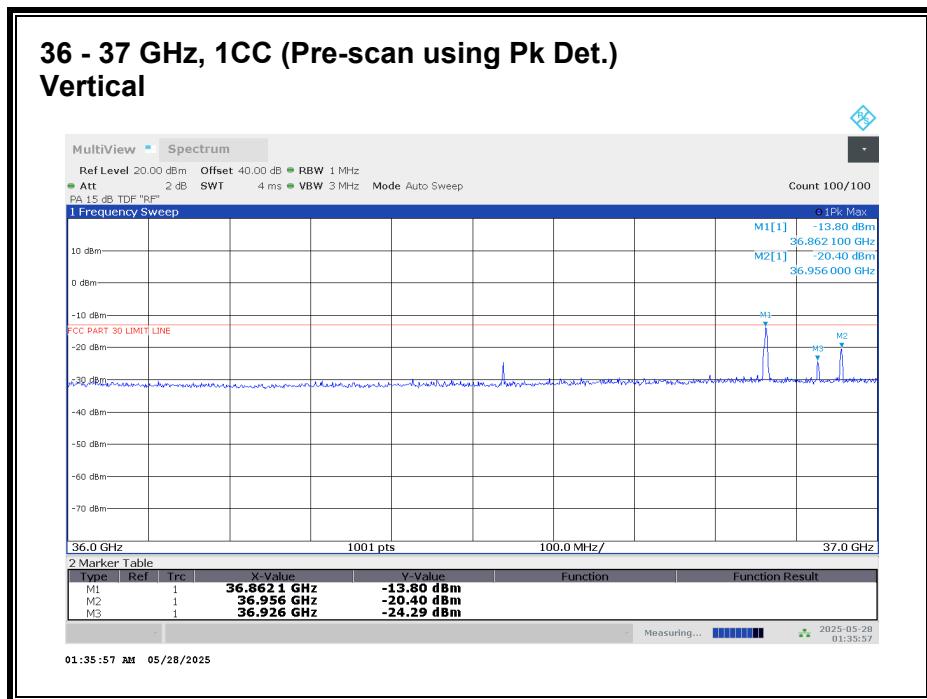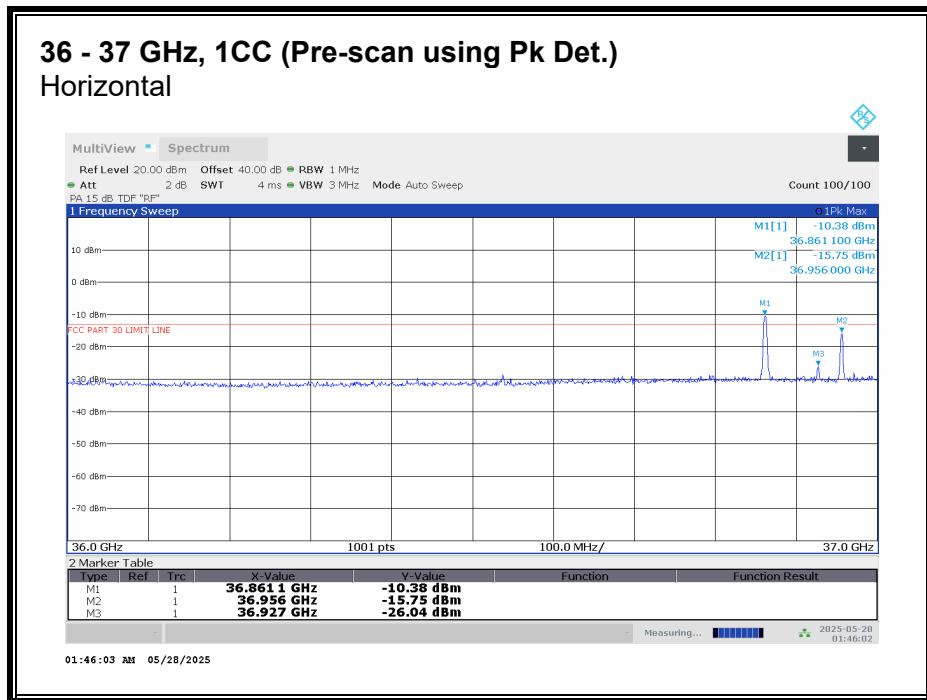


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured

36 - 37 GHz n260, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
36.955	3	H	-13.49	-13	-0.49
36.955	3	V	-22.98	-13	-9.98
36.861	3	H	-17.38	-13	-4.38
36.861	3	V	-23.81	-13	-10.81
36.926	3	H	-28.05	-13	-15.05
39.926	3	V	-33.96	-13	-20.96

36 - 37 GHz n260, 2CC

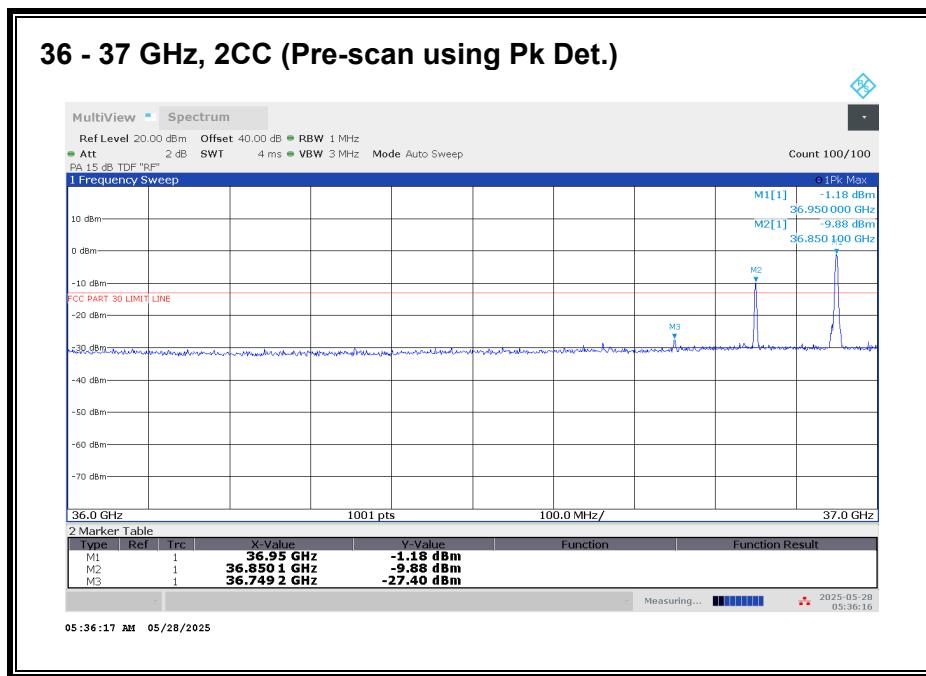

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
36.949	3	-20.22	1.00	-19.22	-13	-6.22

36 - 37 GHz n260, 3CC

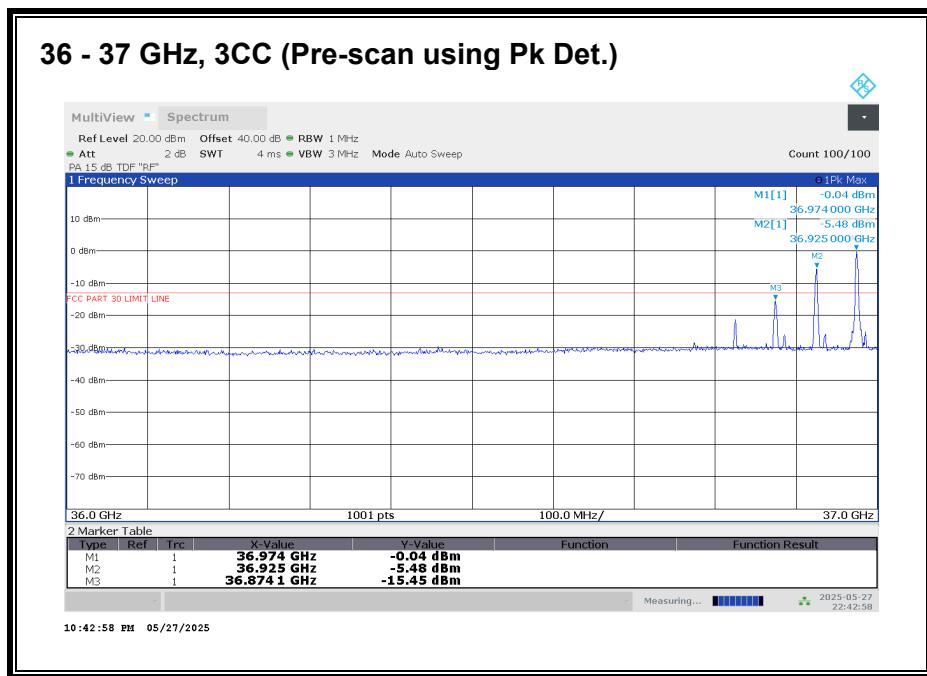

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz) _Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
36.974	3	-20.09	1.00	-19.09	-13	-6.09

36 - 37 GHz n260, 4CC

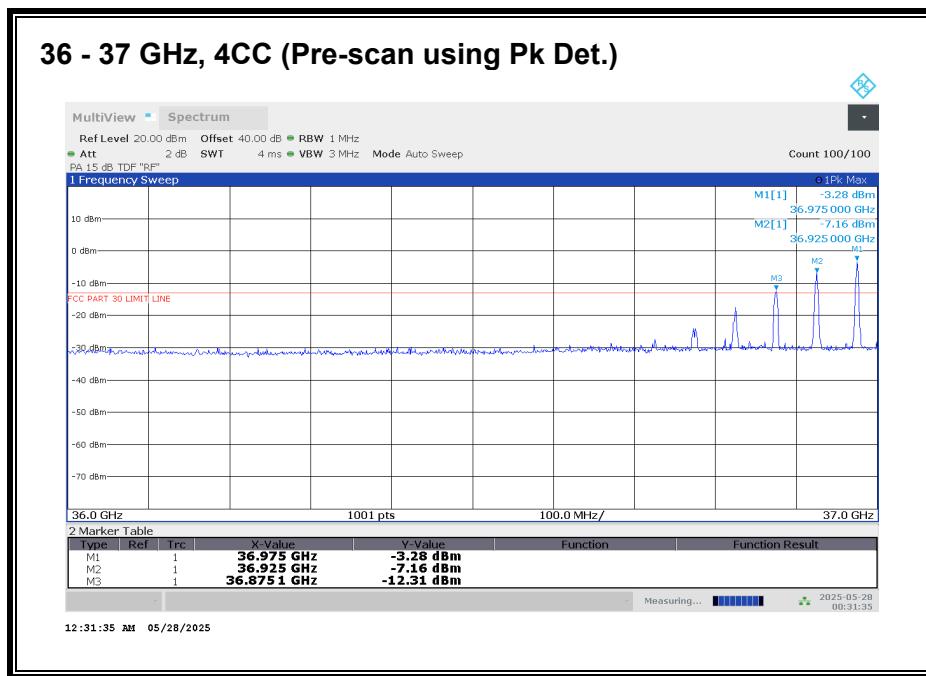

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)



Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq. (GHz)	Meas. Distance (m)	TRP (dBm)	ΔTRP (dB)	Corrected TRP (dBm)	TRP Limit (dBm)	Margin (dB)
36.974	3	-21.08	1.00	-20.08	-13	-7.08


8.4.34. RSE n260 40 – 41 GHz

Note: 37 - 40 GHz covered by Fundamental and BE measurements.

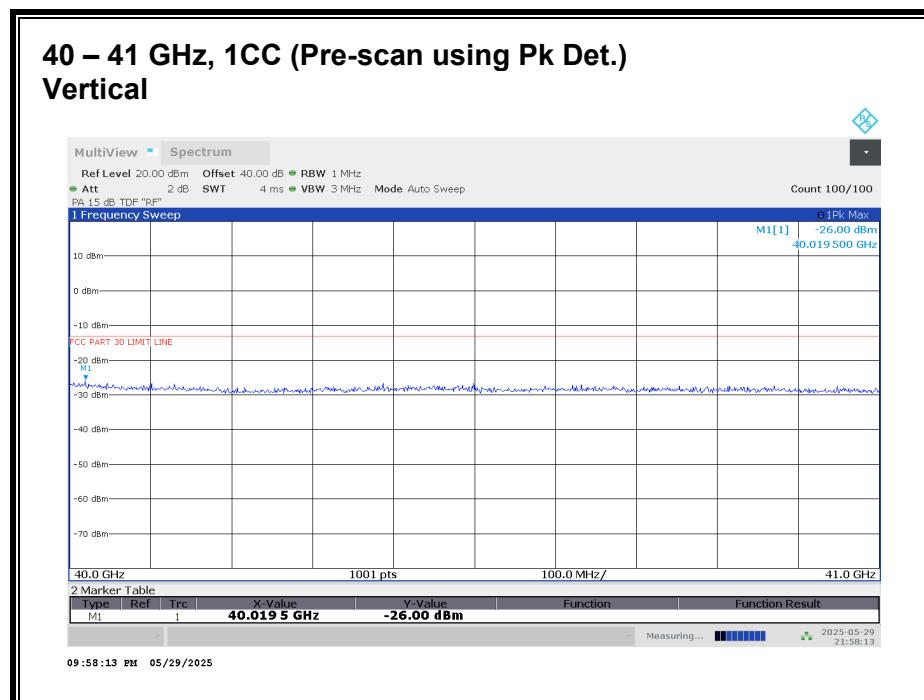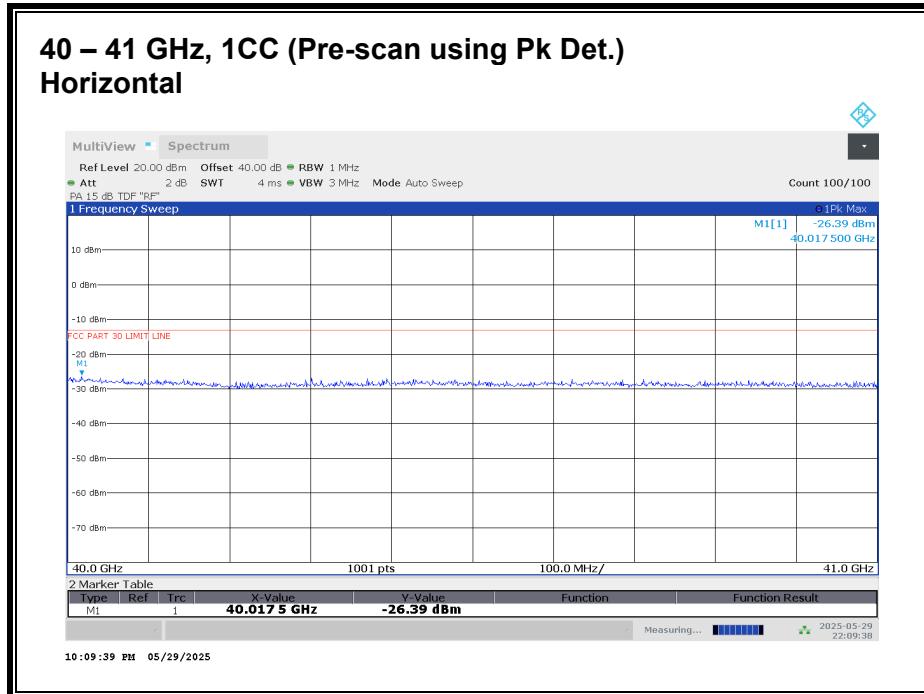

No emission detected using Peak Detection.

40 – 41 GHz n260, 2CC

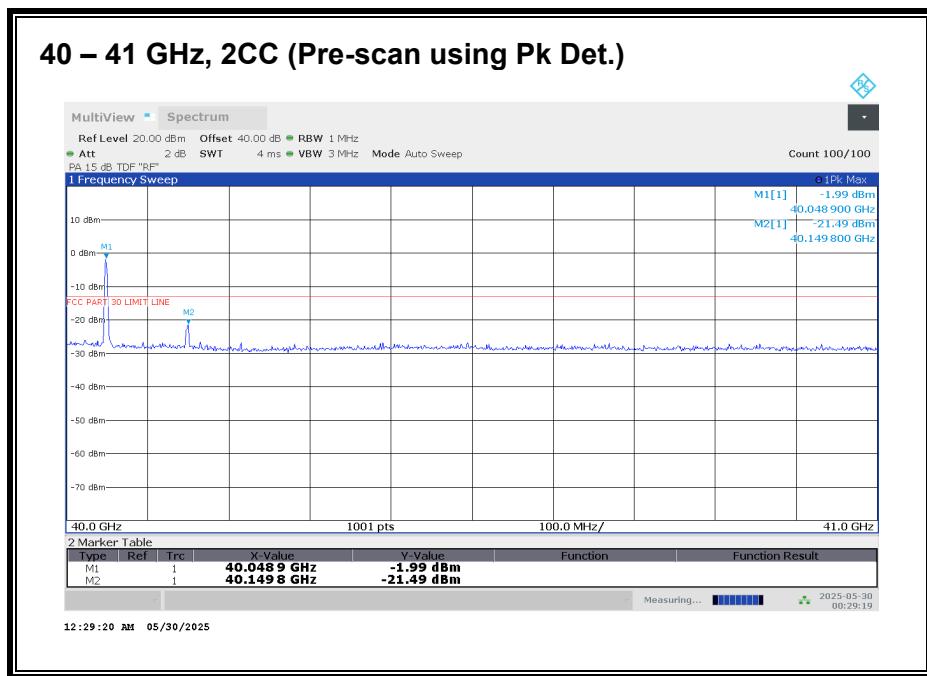

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq. (GHz)	Meas. Distance (m)	Rx Ant. Polarity H/V	Corrected Avg EIRP (dBm)	TRP Limit (dBm)	Margin (dB)
40.049	3	V	-13.18	-13	-0.18

40 – 41 GHz n260, 3CC

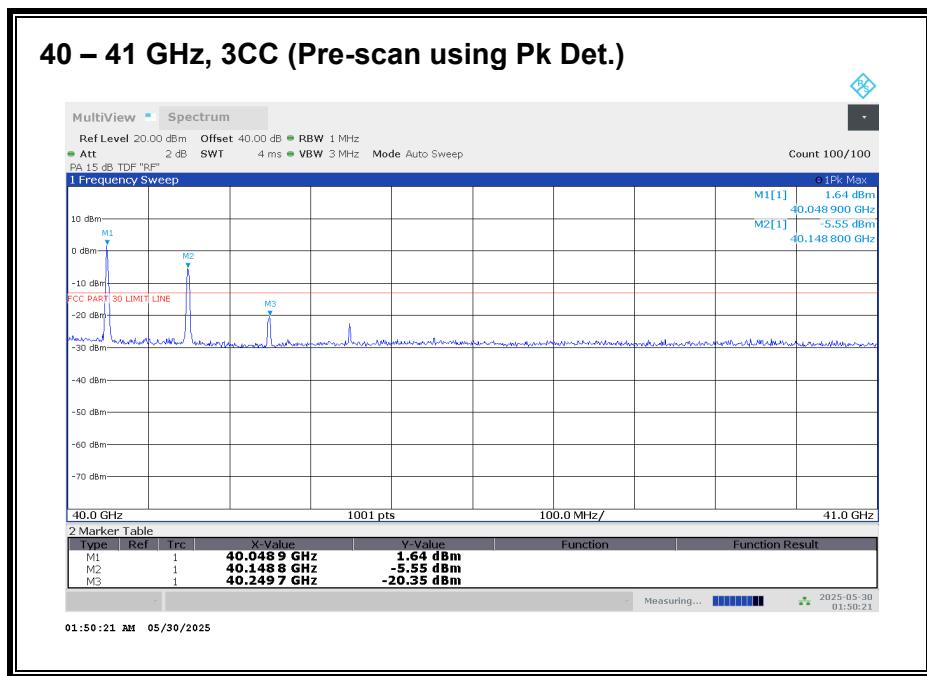

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
40.049	3	-21.89	1.00	-20.89	-13	-7.89

40 – 41 GHz n260, 4CC

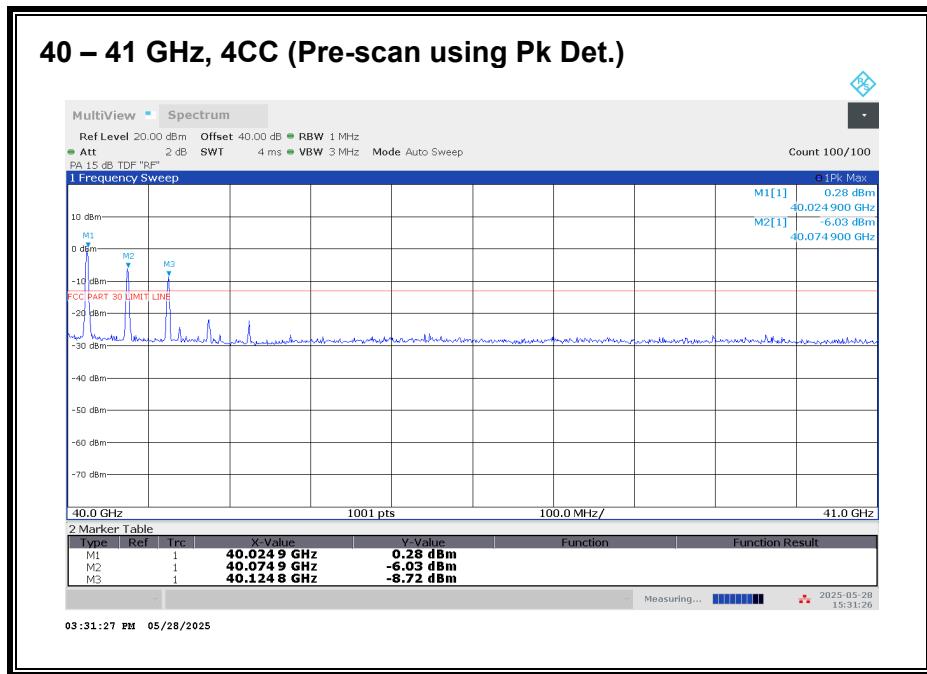

Worst case configuration:



SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.



Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
40.024	3	-23.88	1.00	-22.88	-13	-9.88

8.4.35. RSE n260 41 – 50 GHz

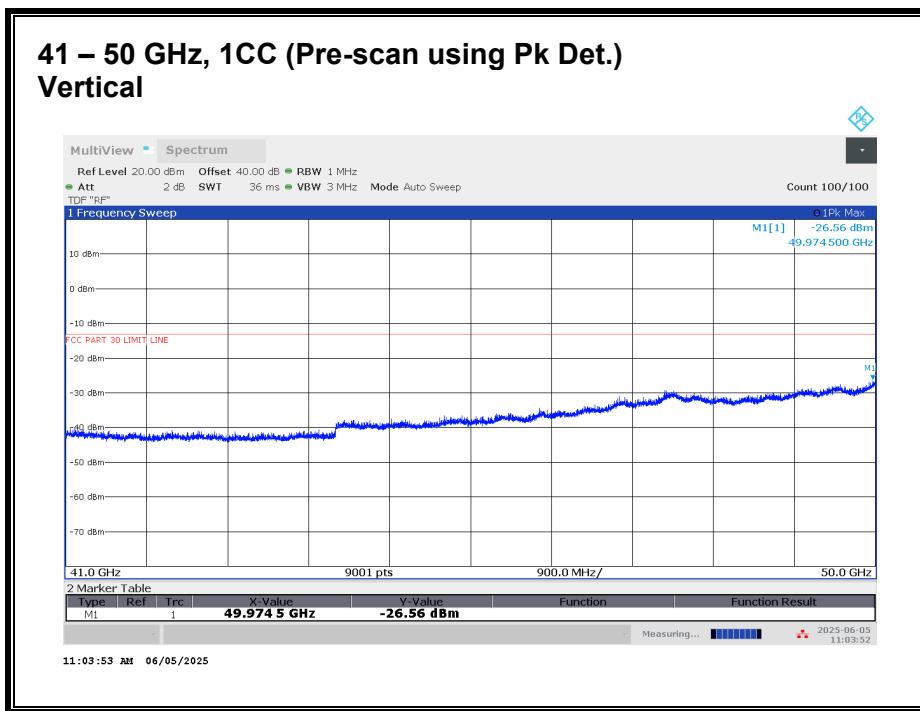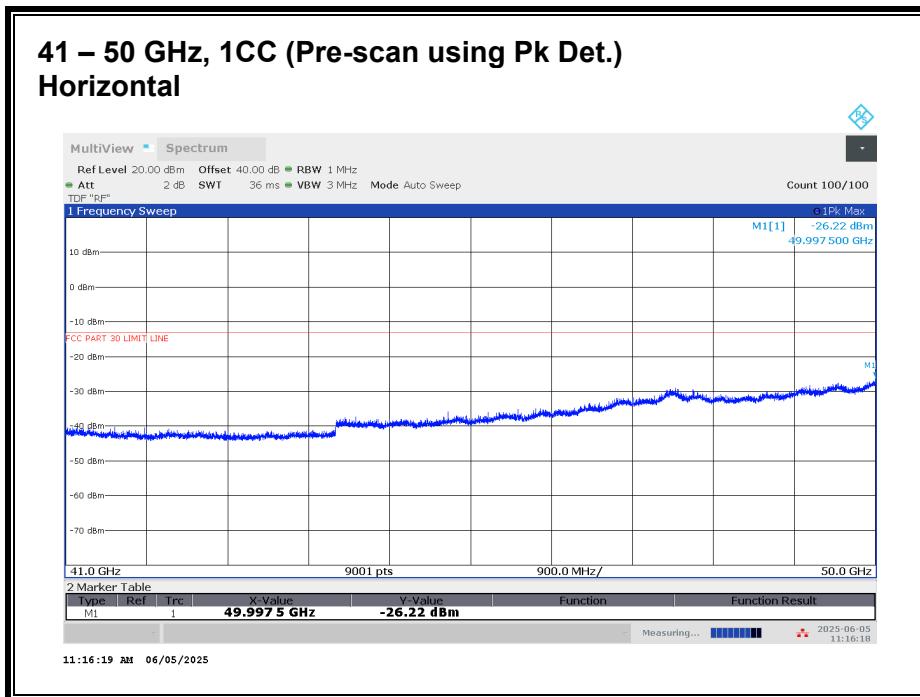

No emission detected using Peak Detection.

8.4.36. RSE n260 50 - 75 GHz

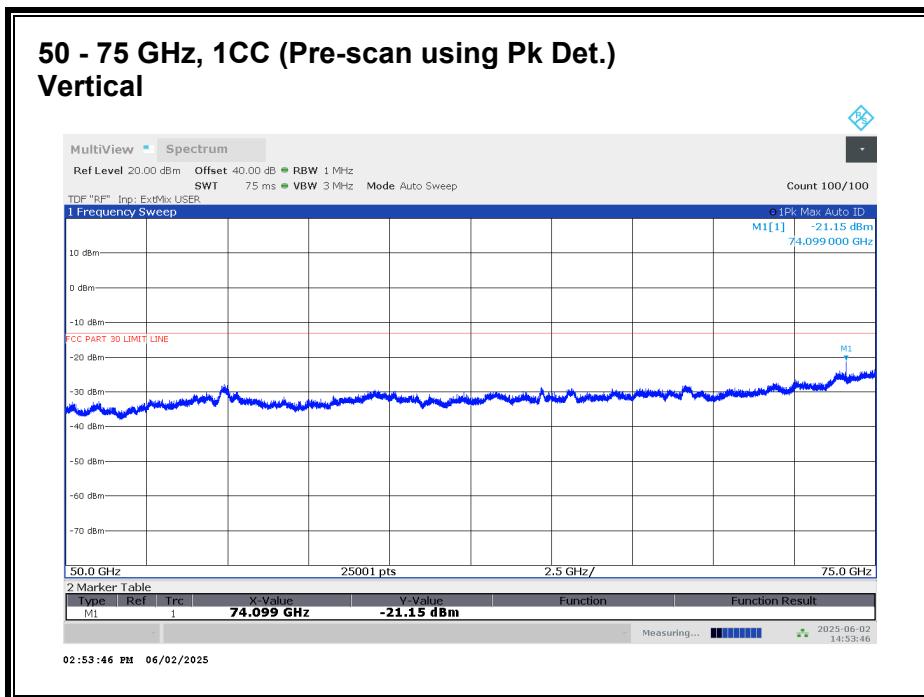
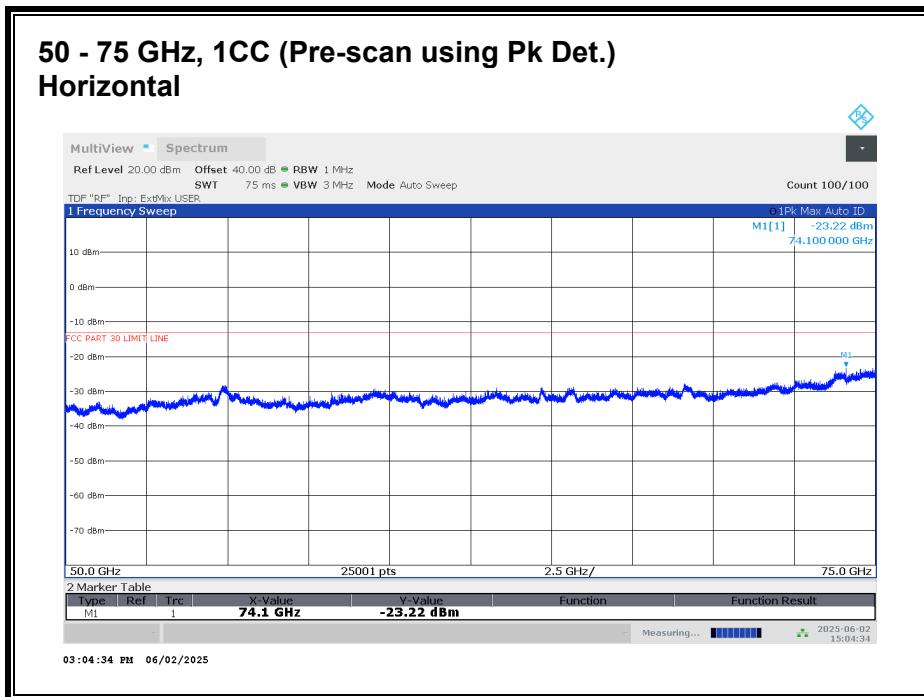


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

50 – 75 GHz n260, 1CC



Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
74.099	3	H	-27.91	-13	-14.91
74.099	3	V	-34.83	-13	-21.83

8.4.37. RSE n260 75 - 110 GHz

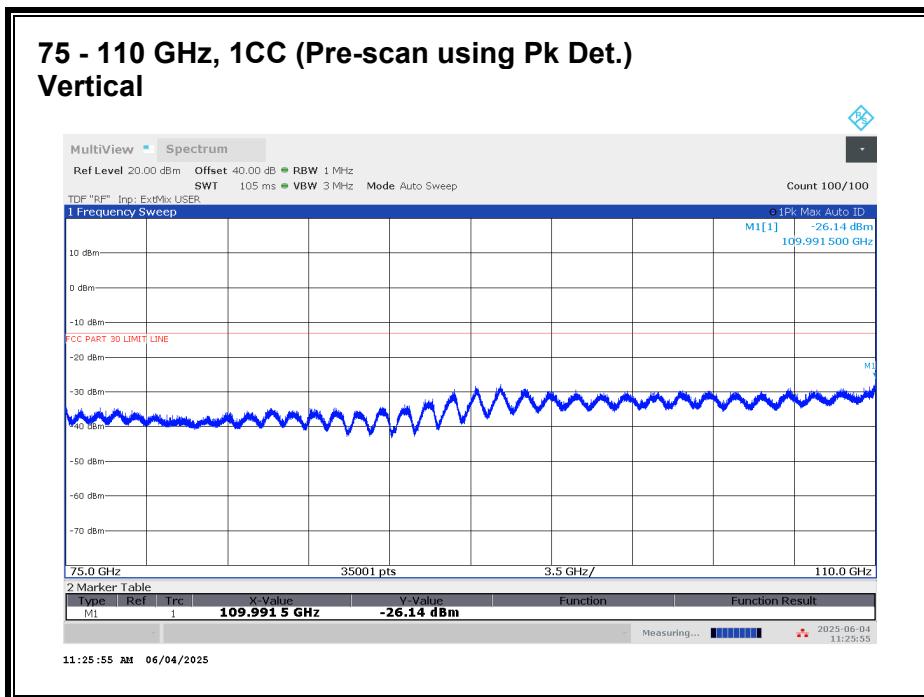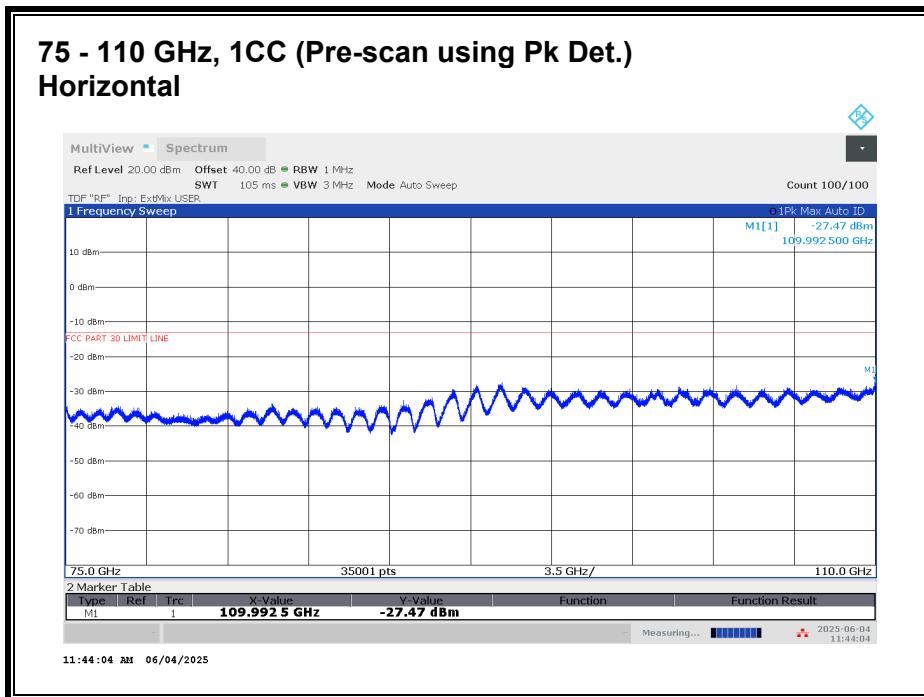

No emission detected using Peak Detection.

8.4.38. RSE n260 110 - 170 GHz

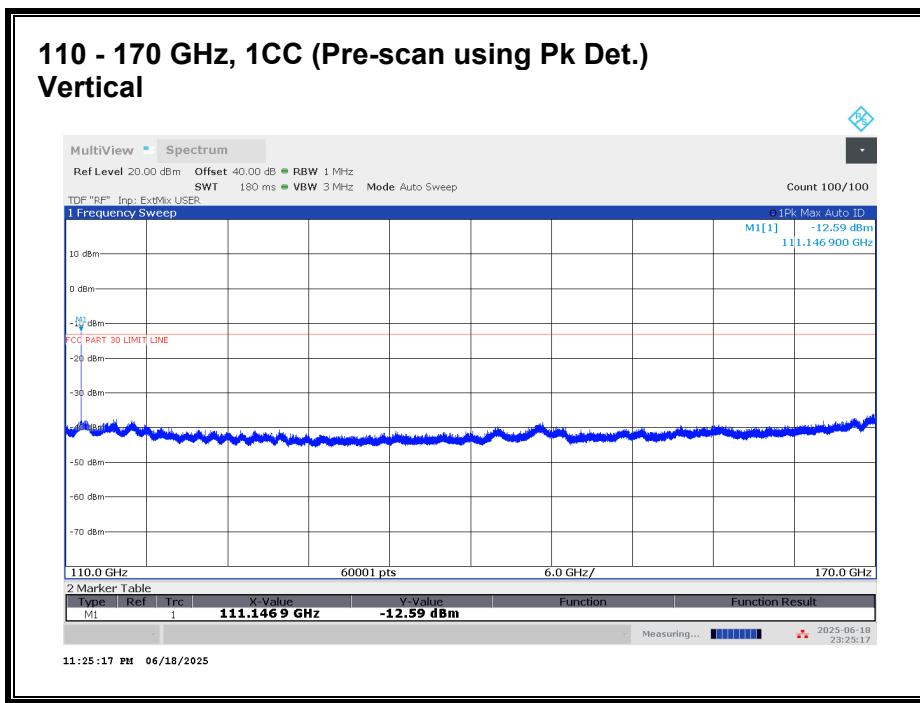
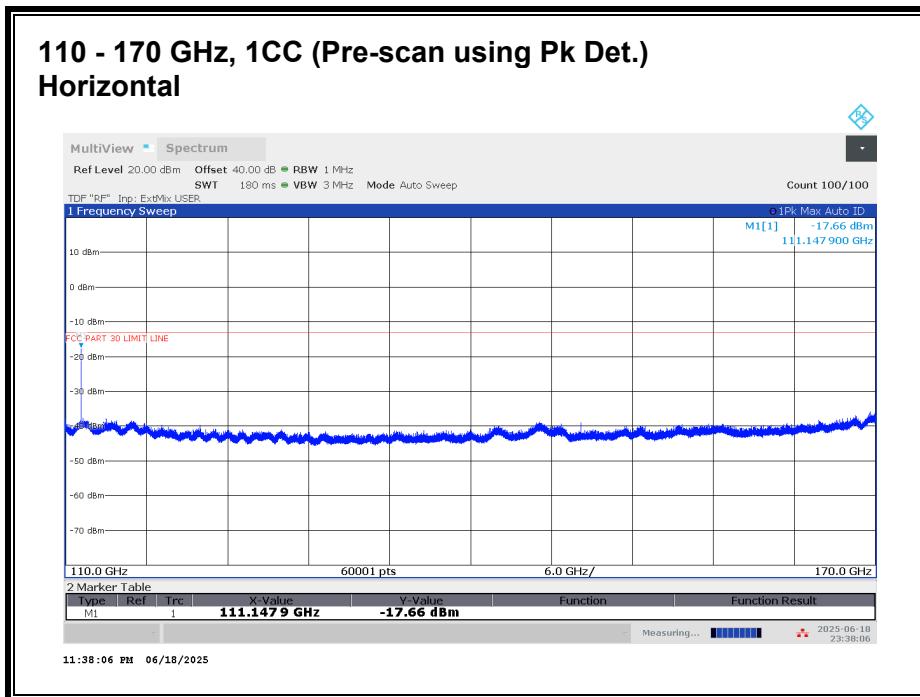


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

110 - 170 GHz n260, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
111.146	1	H	-27.04	-13	-14.04
111.146	1	V	-19.88	-13	-6.88

8.4.39. RSE n260 170 - 200 GHz

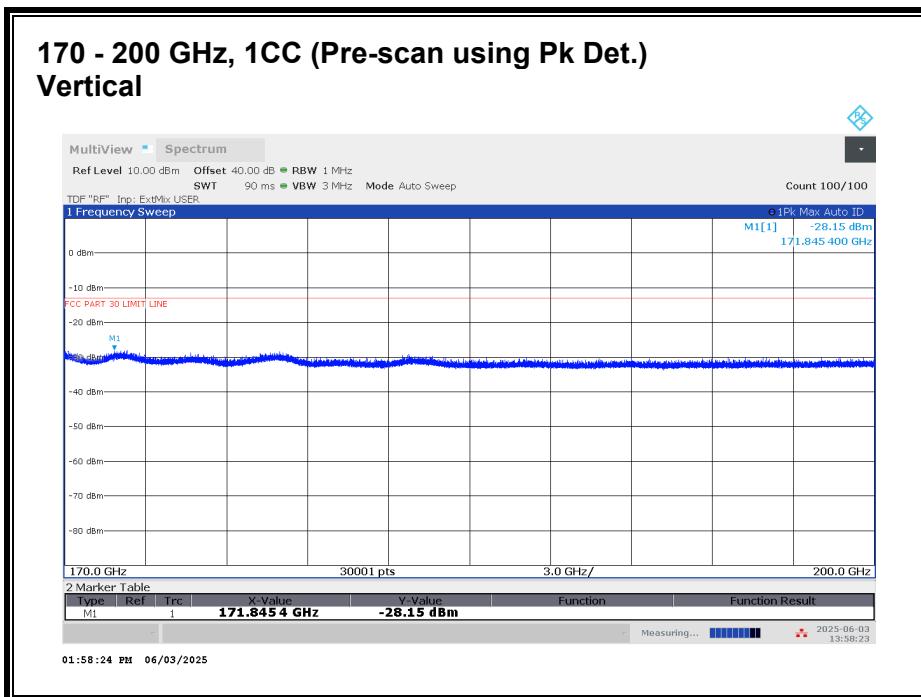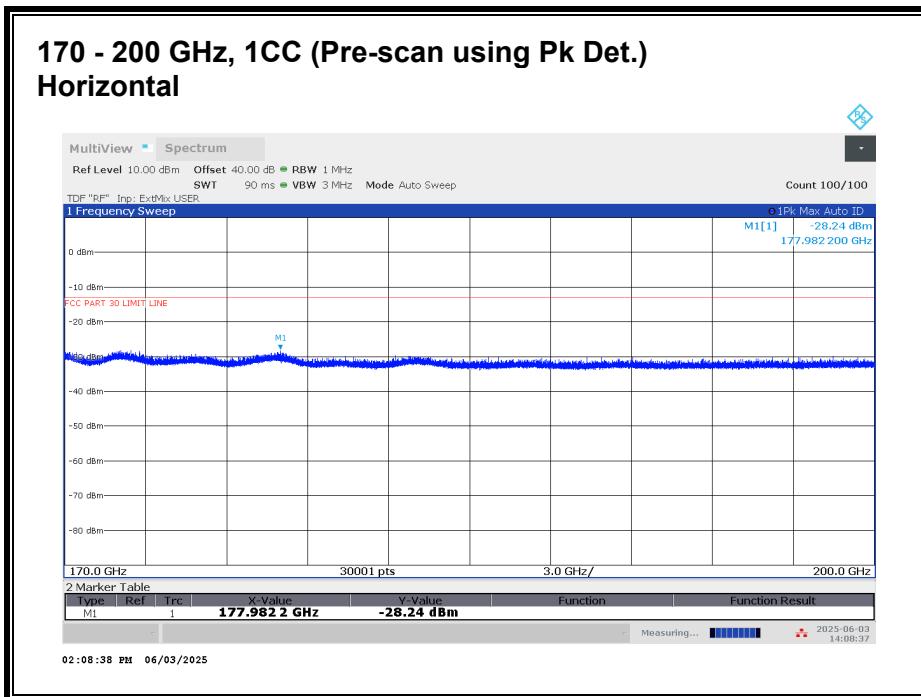

No emission detected using Peak Detection.

8.5. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055

LIMIT

For reporting purposes only

TEST PROCEDURES

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.5
ANSI C63.26-2015 Section 5.6

Test procedures for temperature variation:

- a. Position the EUT in temperature/humidity chamber with power off.
- b. Set the chamber temperature to 50°C and stabilize the EUT for at least 30 minutes.
- c. Record maximum change in frequency within one minute after powering the EUT.
- d. Decrease chamber temperature at 10°C intervals from 50°C to -30°C. Record maximum change in frequency at each temperature.
- e. A period of at least 30 minutes is provided to allow stabilization of the equipment at each temperature level.

- Temp. = -30°C to +50°C

Test procedures for voltage variation:

- a. Position the EUT in temperature/humidity chamber with power off.
- b. Set the chamber temperature to 20°C.
- c. Record maximum frequency change within one minute after powering the EUT.
- d. The primary supply voltage is varied from 85% to 115% of the nominal value for hand-carried, battery-powered equipment. Primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

- Voltage = (85% - 115%)
- Nominal: 3.8 VDC; Low: 3.23 VDC; High: 4.37 VDC

The measurements were performed with the CW signal of center frequency of each frequency band.

RESULTS

See the following pages.

Employee IDs: 19437, 27780
Test Date: 07/03/2025 – 07/04/2025
Test Location: Temperature Chamber A

8.5.1. FREQUENCY STABILITY n258 SB1

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	24.3550462	26.864
Nominal	40	24.3550501	30.761
Nominal	30	24.3550232	3.923
Nominal	20	24.3550193	Reference
Nominal	10	24.3550158	-3.472
Nominal	0	24.3550007	-18.577
Nominal	-10	24.3550118	-7.519
Nominal	-20	24.3550454	26.047
Nominal	-30	24.3551002	80.864
115%	20	24.3550049	-14.436
85%	20	24.3550016	-17.670

8.5.2. FREQUENCY STABILITY n258 SB2

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	25.0050247	17.588
Nominal	40	25.0050157	8.636
Nominal	30	25.0050142	7.073
Nominal	20	25.0050071	Reference
Nominal	10	25.0049976	-9.542
Nominal	0	25.0049956	-11.458
Nominal	-10	25.0050016	-5.533
Nominal	-20	25.0050138	6.662
Nominal	-30	25.0050427	35.570
115%	20	25.0049794	-27.743
85%	20	25.0049822	-24.848

8.5.3. FREQUENCY STABILITY n261

Input Voltage	Environment	Frequency	Delta
		(GHz)	(kHz)
Nominal	50	27.9299676	36.047
Nominal	40	27.9299596	27.983
Nominal	30	27.9299531	21.497
Nominal	20	27.9299316	Reference
Nominal	10	27.9299302	-1.419
Nominal	0	27.9299051	-26.465
Nominal	-10	27.9299429	11.331
Nominal	-20	27.9299540	22.448
Nominal	-30	27.9300031	71.467
115%	20	27.9298933	-38.296
85%	20	27.9298793	-52.308

8.5.4. FREQUENCY STABILITY n260

Input Voltage	Environment	Frequency	Delta
		(GHz)	(kHz)
Nominal	50	38.5049403	29.455
Nominal	40	38.5049273	16.446
Nominal	30	38.5049371	26.178
Nominal	20	38.5049109	Reference
Nominal	10	38.5049055	-5.372
Nominal	0	38.5049085	-2.350
Nominal	-10	38.5049296	18.746
Nominal	-20	38.5049315	20.570
Nominal	-30	38.5049790	68.113
115%	20	38.5048819	-28.986
85%	20	38.5048748	-36.076

The occupied bandwidths (Section 8.1) are smaller than the channel bandwidths by at least 1.97 MHz (98.03 MHz from n260, 2CC, 50 MHz BW, SISO-Dual, QPSK, High CH) for all modes of operation, therefore the signal is at least 0.985 MHz from either edge of the channel. As the channels are fully contained within the FCC-allocated bands, and the frequency stability is significantly less than 0.985 MHz, with a maximum frequency shift of 81 kHz (n258 SB1 at -30°C) over the test conditions, the signal is always contained within the allocated channel and band.

9. SETUP PHOTOS

Please refer to 15496277-EP39V1 for setup photos.

END OF REPORT

APPENDIX A

1. 50 - 75 GHz VDI WR15SAX-F

Serial No.: SAX 954

2. 75 - 110 GHz VDI WR10SAX-F

Serial No.: SAX 955

3. 110 - 170 GHz VDI WR6.5SAX-F

Serial No.: SAX 956

4. 170 - 260 GHz VDI WR4.3SAX-F

Serial No.: SAX 987

Docusign Envelope ID: 220920A2-8696-4628-BD78-124DD1F104B2



Virginia Diodes, Inc.
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: UL LLC
47173 Benicia Street
Fremont, CA 94538
United States

From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 243720
Shipping Date: 9/18/2024

Today's Date: 09/18/2024
PO Number: 7862030966

<u>Quantity Shipped</u>	<u>Unit</u>	<u>Description</u>	<u>Order-Job Number</u>
1	EA	RETEST-WR15SAX-F - WR15SAX-F / SN: SAX 954	240422-01
1	EA	RETEST-WR10SAX-F - WR10SAX-F / SN: SAX 955	240422-02
1	EA	RETEST-WR6.5SAX-F - WR6.5SAX-F / SN: SAX 956	240422-03
1	EA	RETEST-WR4.3SAX-F - WR4.3SAX-F / SN: SAX 987	240422-04

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

Heather St. Amaro


Authorized Signature
Virginia Diodes, Inc

DD

5. 33 - 50 GHz CMI HO22R HORN ANTENNA




24 Boston Court
Longmont, CO 80501
303 651-0707 (P)
303 651-0708 (F)
www.custommicrowave.com

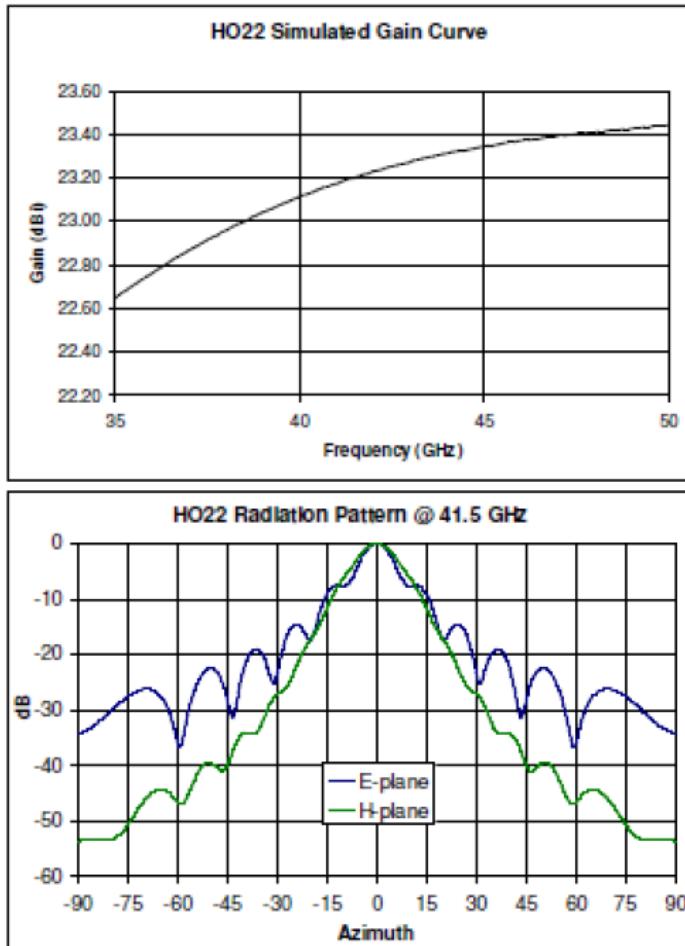

6. 50 - 75 GHz CMI HO15R HORN ANTENNA




24 Boston Court
Longmont, CO 80501
303 651-0707(P)
303 651-0706(F)
www.custommicrowave.com

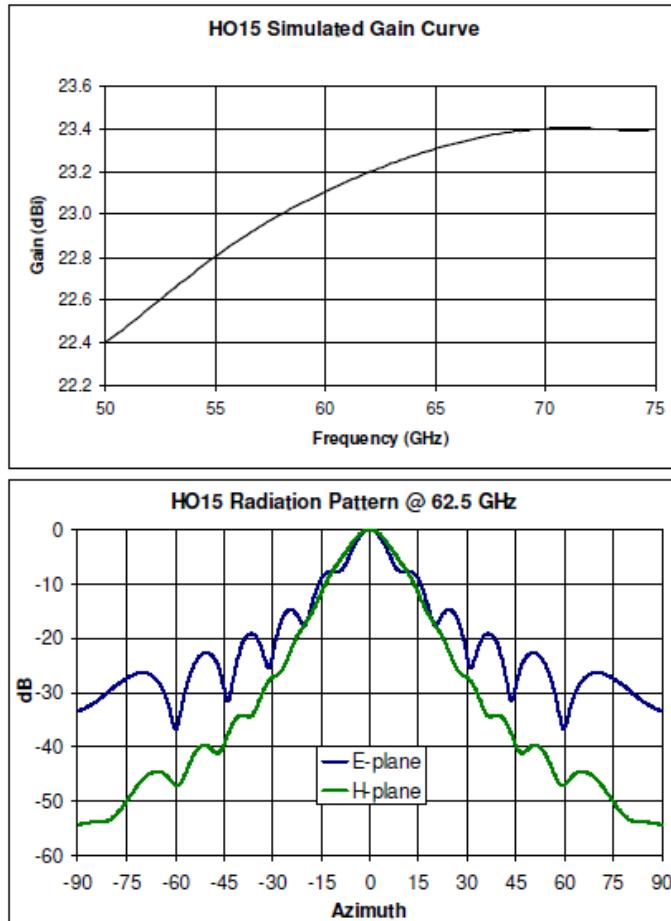

7. 75 - 110 GHz CMI HO10R HORN ANTENNA





24 Boston Court
Longmont, CO 80501
303 651-0707(P)
303 651-0708(F)
www.custommicrowave.com

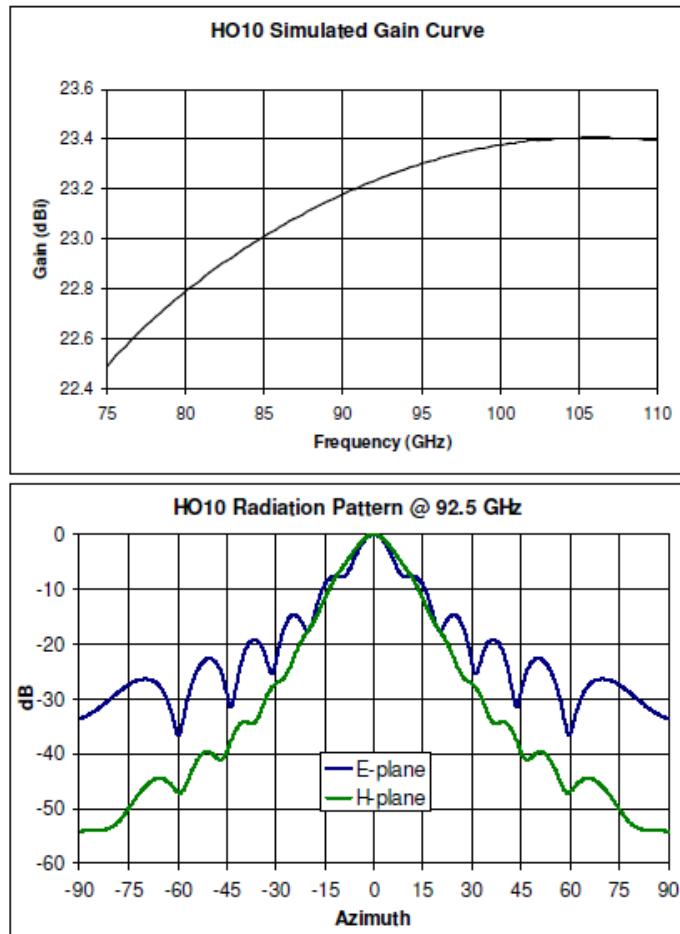

8. 110 - 170 GHz CMI HO6R HORN ANTENNA



24 Boston Court
Longmont, CO 80501
303 651-0707(P)
303 651-0706(F)
www.custommicrowave.com

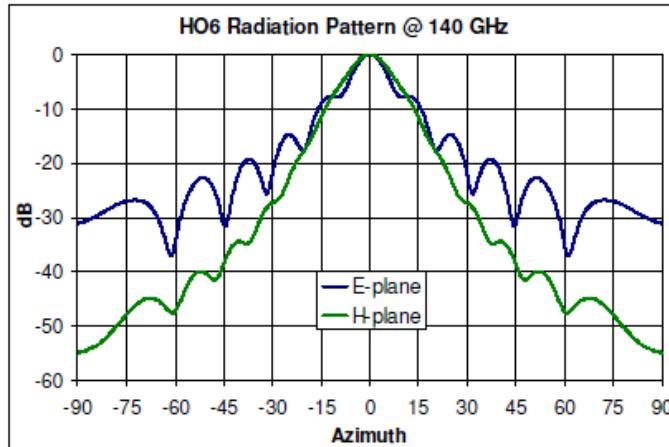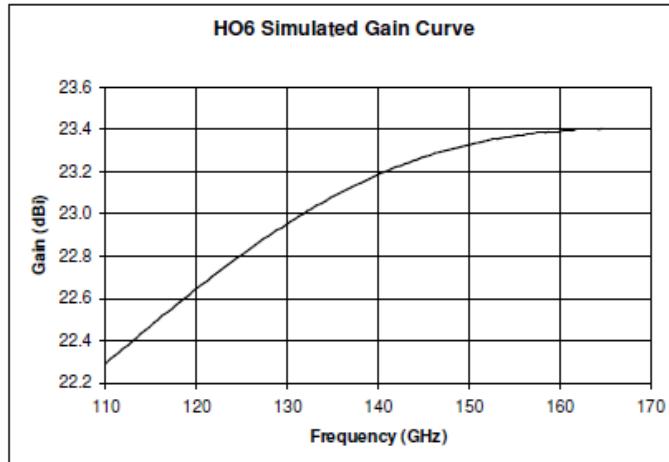

9. 170 - 260 GHz CMI HO4R HORN ANTENNA



24 Boston Court
Longmont, CO 80501
303 651-0707(P)
303 651-0706(F)
www.custommicrowave.com

