

TEST REPORT

Report Number: 15496277-E18V1

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A3258 (PARENT MODEL)
A3519, A3520, A3521 (VARIANT MODELS)

Brand : APPLE

FCC ID : BCG-E8947A (PARENT MODEL)
BCG-E8951A, BCG-E8952A,
BCG-E8953A (VARIANT MODELS)

IC : 579C-E8947A (PARENT MODEL)
579C-E8951A, 579C-E8952A
579C-E8953A (VARIANT MODELS)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 11
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:

July 31, 2025

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	07/31/2025	Initial Issue	--

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION.....	7
4. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. DECISION RULES	7
4.3. MEASUREMENT UNCERTAINTY	8
4.4. SAMPLE CALCULATION.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT.....	9
5.2. SOFTWARE AND FIRMWARE	9
5.3. MAXIMUM E-FIELD STRENGTH.....	10
5.4. WORST-CASE CONFIGURATION AND MODE.....	10
6. DESCRIPTION OF TEST SETUP	11
7. TEST AND MEASUREMENT EQUIPMENT	16
8. OCCUPIED BANDWIDTH.....	17
8.1. PRIMARY ANTENNA.....	19
8.2. SECONDARY ANTENNA.....	22
9. RADIATED EMISSION TEST RESULTS.....	24
9.1. LIMITS AND PROCEDURE	24
9.2. PRIMARY ANTENNA FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER	26
9.2.1. READER MODE, TYPE B 106Kbps.....	26
9.2.2. CE MODE, TYPE B 106Kbps.....	30
9.2.3. TAG MODE, TYPE B 106Kbps	34
9.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER.....	38
9.3.1. Type B (Reader Mode), SPURIOUS EMISSION 106Kbps	38
9.3.2. Type B (CE Mode), SPURIOUS EMISSION 106Kbps	40
9.3.3. Type B (Tag Mode), SPURIOUS EMISSION 106Kbps	42
9.4. SECONDARY ANTENNA FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER	44
9.4.1. READER MODE, TYPE B 106Kbps.....	44
9.4.2. TAG MODE, TYPE B 106Kbps	48
9.5. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER.....	52
9.5.1. Type B (Reader Mode), SPURIOUS EMISSION 106Kbps	52
9.5.2. Type B (Tag Mode), SPURIOUS EMISSION 106Kbps	54

10. FREQUENCY STABILITY	56
10.1. PRIMARY ANTENNA	57
10.2. SECONDARY ANTENNA	59
11. AC MAINS LINE CONDUCTED EMISSIONS	60
11.1. PRIMARY ANTENNA	61
11.1.1. READER MODE: Type B, 106 Kbps	61
11.1.2. READER MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED).....	65
11.1.3. CE MODE: Type B, 106 Kbps	69
11.1.4. CE MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED).....	73
11.1.5. TAG MODE: Type B, 106 Kbps	77
11.1.6. TAG MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED)	81
11.2. SECONDARY ANTENNA	85
11.2.1. READER MODE: Type B, 106 Kbps	85
11.2.2. READER MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED).....	89
11.2.3. TAG MODE: Type B, 106 Kbps	93
11.2.4. TAG MODE: TYPE B, 106 Kbps (ANTENNA PORT TERMINATED).....	97
12. SETUP PHOTOS	101
13. APPENDIX A – SPOT CHECK EVALUATION	101
13.1. MODEL DIFFERENCES	101
13.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3519.....	102
13.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3520.....	102
13.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3521.....	103

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A3258 (PARENT MODEL)
A3519, A3520, A3521 (VARIANT MODELS)

BRAND: APPLE

SERIAL NUMBER: HPVTR7Y10Y(FS), LF7VG70HWG, J6NQ7T2PNY
DW20QWN251

SAMPLE RECEIPT DATE: 2025/06/18(FS), 2025/05/22, 2025/02/21

DATE TESTED: 2025/06/11 to 2025/07/30

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 11, Annex B	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.


This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Frank Ibrahim
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Rolly Alegre
Laboratory Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with:

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15
- *ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024
- KDB 414788 D01 Radiated Test Site
- RSS-GEN Issue 5 + A1 + A2
- RSS-210 Issue 11

*Note: The use of ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 does not deviate from the testing procedures of ANSI C63.10-2020

3. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☐	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☐	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.).

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.2%
Temperature	±0.57 %
Relative Humidity	3.39 %
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible.

5.2. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 23A258

5.3. MAXIMUM E-FIELD STRENGTH

The transmitter has a maximum peak radiated E-field strength as follows:

Antenna	Frequency Range (MHz)	Mode	Kbps	E Field at 30m distance (dBuV/m)
Primary	13.56	Type B	Reader	28.19
			Tag	27.76
			CE	27.56
Secondary	13.56	Type B	Reader	4.29
			Tag	4.65

5.4. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated under three orthogonal orientations X (Flatbed), Y (Landscape), and Z (Portrait). The Y (Landscape) orientation was determined to be the worst-case orientation.

The worst case position of the EUT was investigated under two configurations: EUT with AC/DC adapter, EUT with earphones. The EUT with AC/DC adapter configuration was determined to be the worst-case configuration; therefore, all final tests were performed on the EUT with AC/DC adapter.

In addition, CE, Reader, and Reader with Tag mode were investigated with Type A, B and F with data rates, such as 106Kbp/s, 212Kbp/s, 424Kbp/s and 848Kbp/s and ISO 15693 configuration to determine the worst case based on the highest power and spurious emissions. Type B 106Kbp/s Reader mode was determined to be the worst case and therefore Type B was selected for all final tests.

For below 30MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 meter open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

6. DESCRIPTION OF TEST SETUP

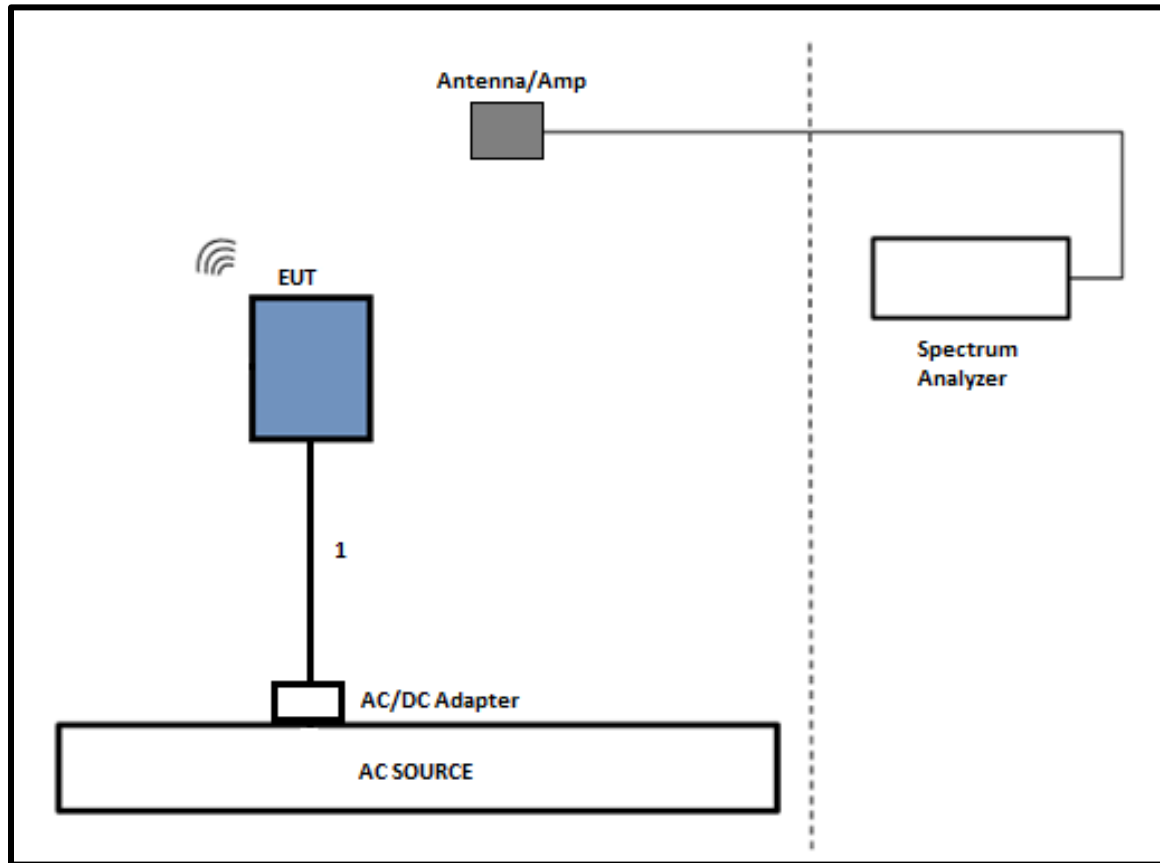
SUPPORT EQUIPMENT

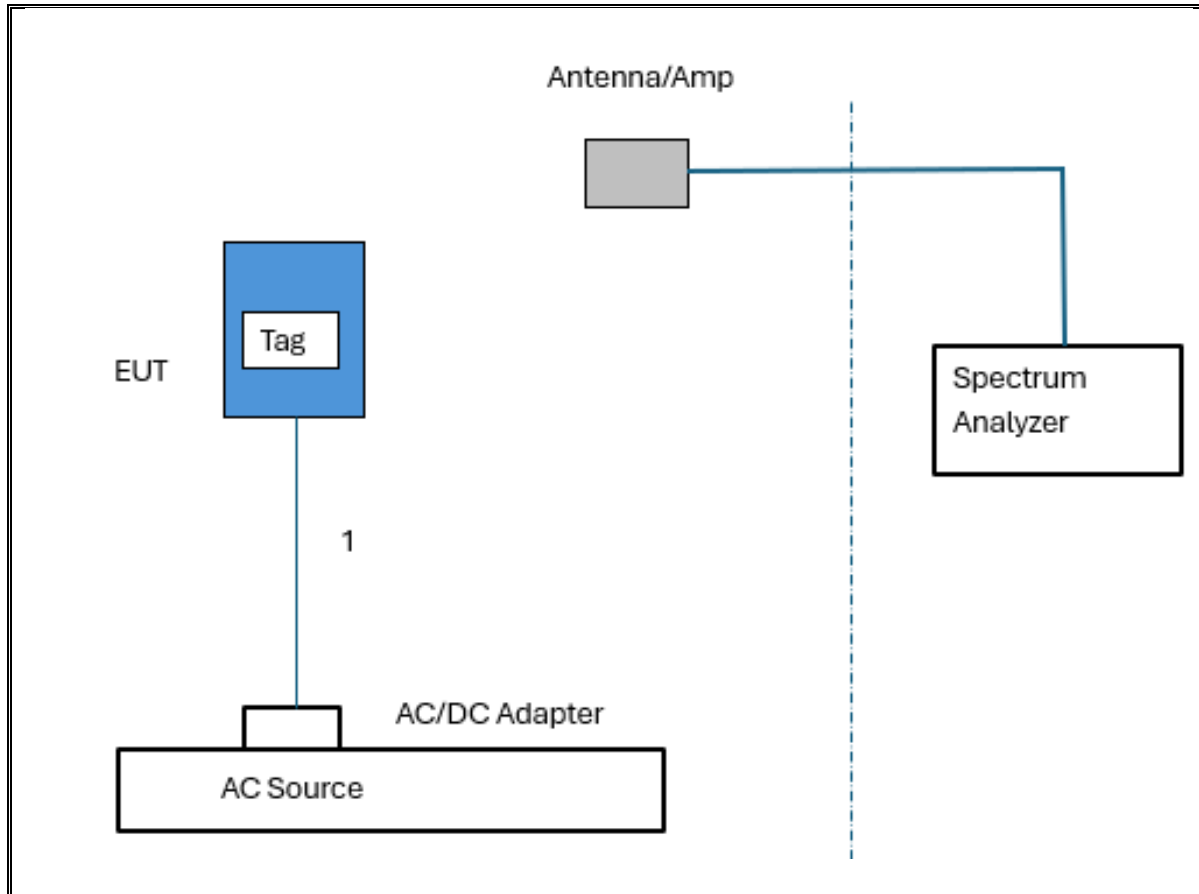
Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	Macbook Pro	C2QLN093FKYR	Doc
Laptop AC/DC adapter	Apple	Charging Brick	C4H238505ARPM0WAP	Doc
EUT AC/DC Adapter	Apple	NA	FTNT0304RFJZL9J9AN	Doc
Tag	NA	NFC TYPE 4B TAG	A803493D139C	DoC

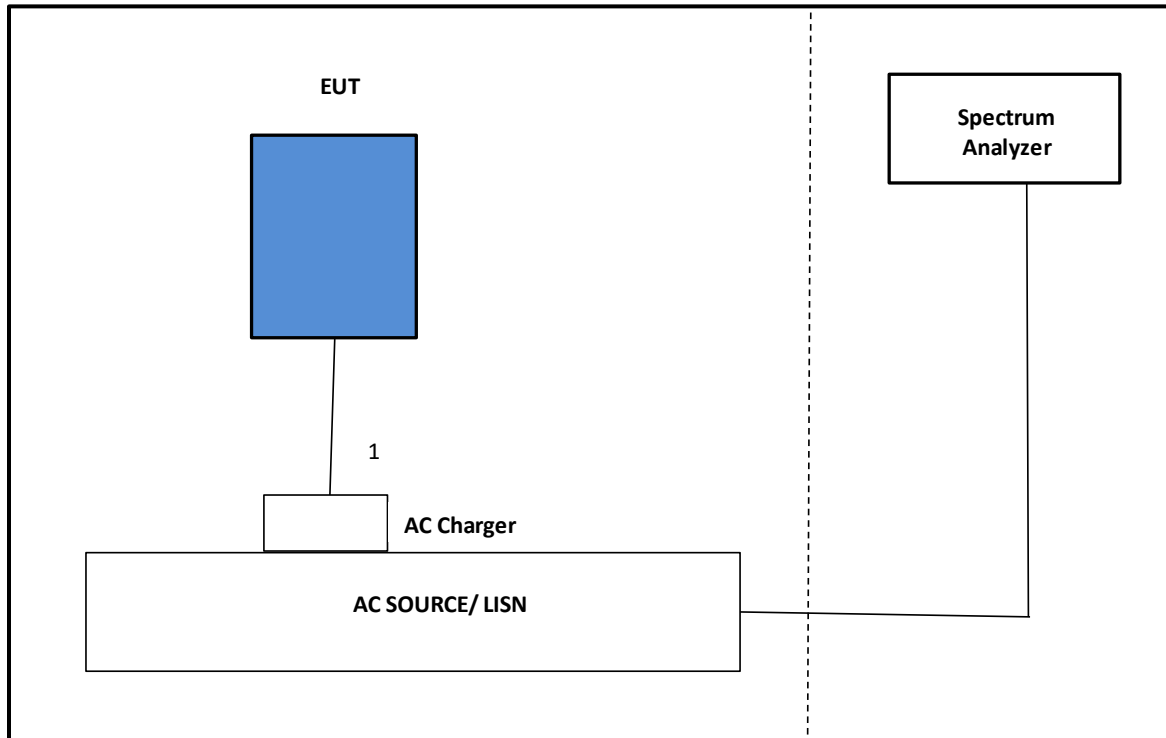
I/O CABLES

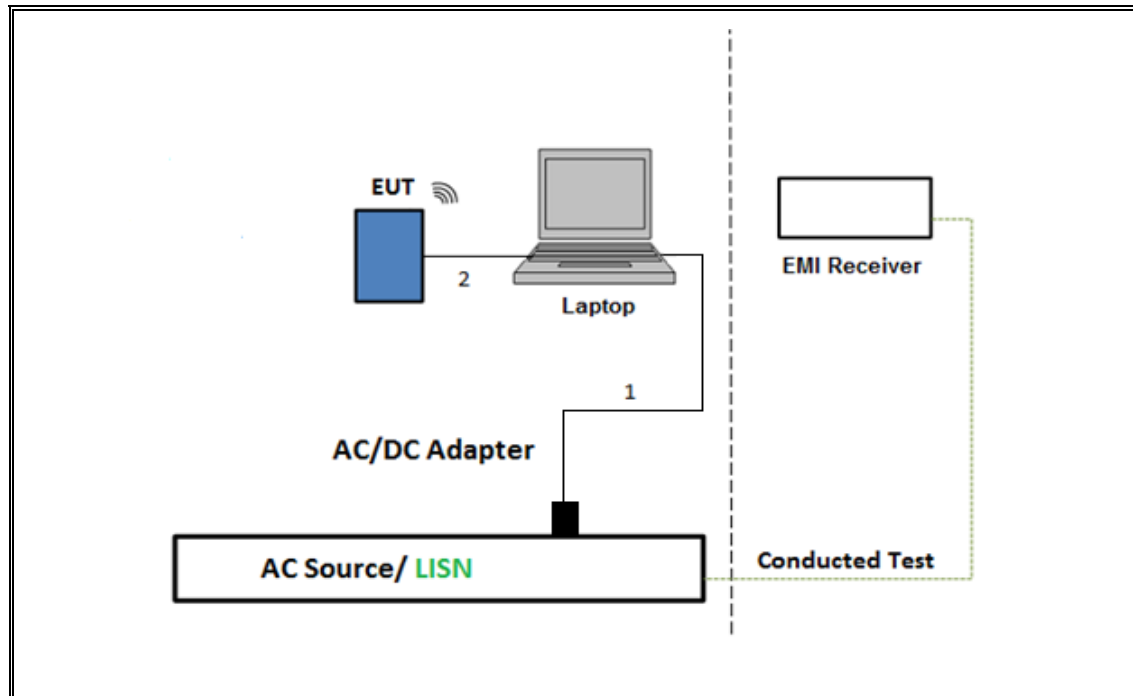
I/O Cable List (RF CONDUCTED TEST)						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Type-C	Un-Shielded	1	N/A

I/O Cable List (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Type-C	Un-Shielded	1	N/A

SETUP DIAGRAM FOR RADIATED TESTS(CE and READER MODE)

SETUP DIAGRAM FOR RADIATED TESTS (READER + TAG MODE)

SETUP DIAGRAM FOR LINE CONDUCTED TESTS

SETUP DIAGRAM FOR LINE CONDUCTED TESTS WITH HOST

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Passive Loop 30Hz – 1MHz	ELECTRO-METRICS	EM-6871	170014	2025/08/31
Antenna, Passive Loop 100 kHz to 30 MHz	ELECTRO-METRICS	EM-6872	170016	2025/08/31
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030B	222071	2026/01/31
Amplifier 9 kHz – 1 GHz	SONOMA INSTRUMENT	310N	170649	2025/08/31
Amplifier 100 kHz – 1 GHz	Keysight Technologies Inc	8447D	T15	2025/08/31
Antenna, BroadBand Hybrid, 30MHz to 2GHz	Sunol Sciences Corp.	JB3	85150	2025/12/30
Antenna, BroadBand Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	230634	2026/11/30
EMI Test Receiver	Rohde & Schwarz	ESW44	169937	2026/02/28
EMI Test Receiver	Rohde & Schwarz	ESW44	223462	2026/02/28
Environmental Chamber	Cincinnati Sub Zero – Division of Weiss Technik	ZPHS-8- 3.5- SCT/WC	89097	2025/10/31
Sniffer Probes	Electro Metrics	EM-6992	N/A	N/A

AC Line Conducted				
Description	Manufacturer	Model	ID Num	Cal Due
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	171646	2026/02/28
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2- 01-480V	175765	2026/01/31
Transient Limiter	TE	TBFL1	207996	2025/09/30
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023	
Conducted Software	UL	UL EMC	N/A	
AC Line Conducted Software	UL	UL EMC	Ver 9.5 Jan 9, 2023	

8. OCCUPIED BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

RESULTS**99% and 20dB BW****Primary Antenna****Type B (Reader Mode)**

Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
106	13.56	22.266	25.37

Type B (CE Mode)

Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
106	13.56	22.064	25.51

Type B (Tag Mode)

Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
106	13.56	22.290	25.44

Secondary Antenna**Type B (Reader Mode)**

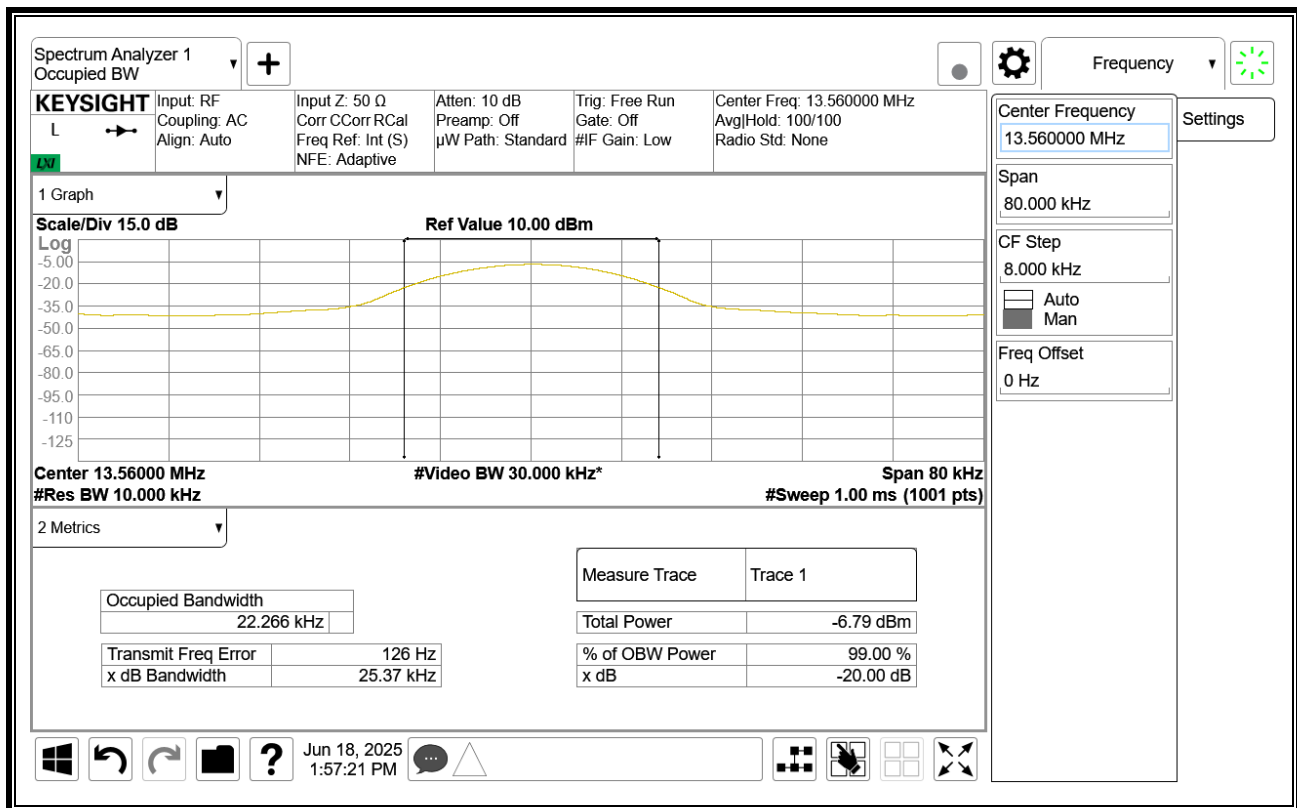
Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
106	13.56	21.839	25.20

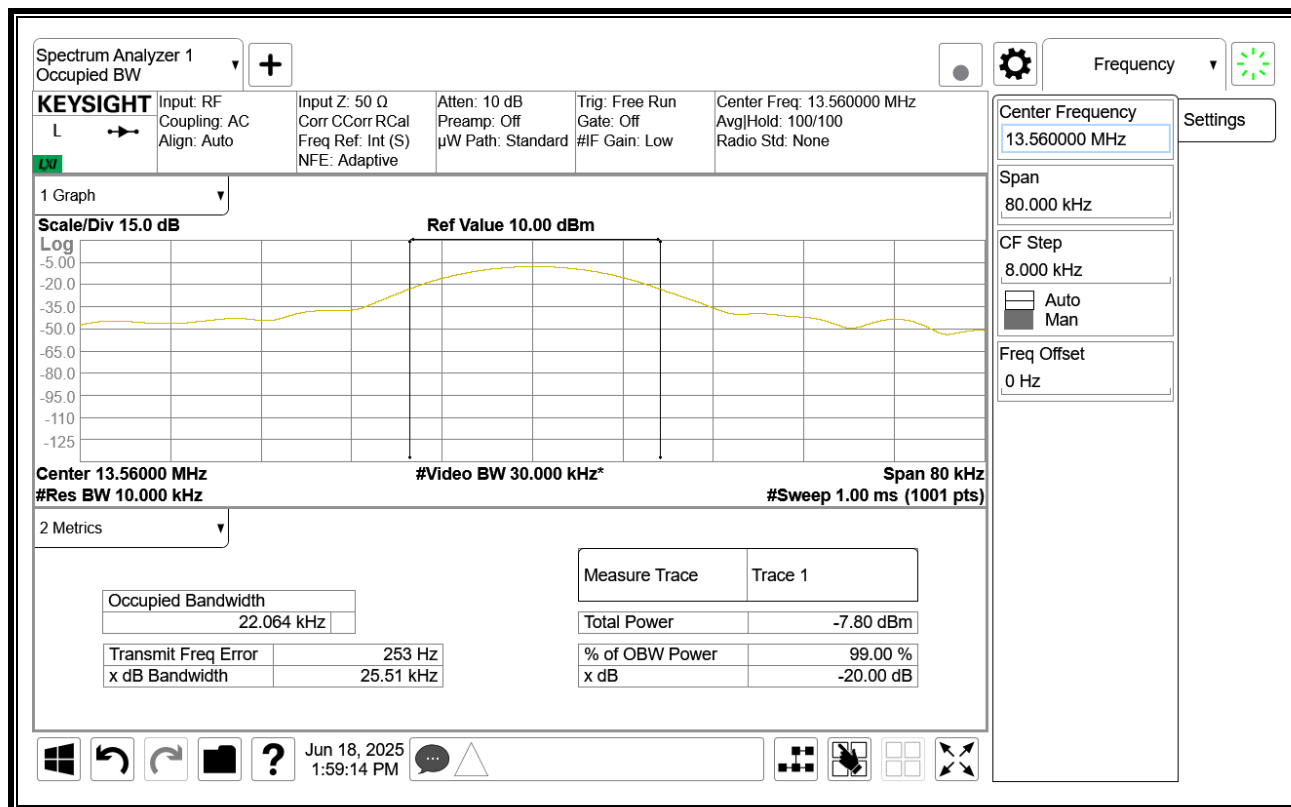
Type B (Tag Mode)

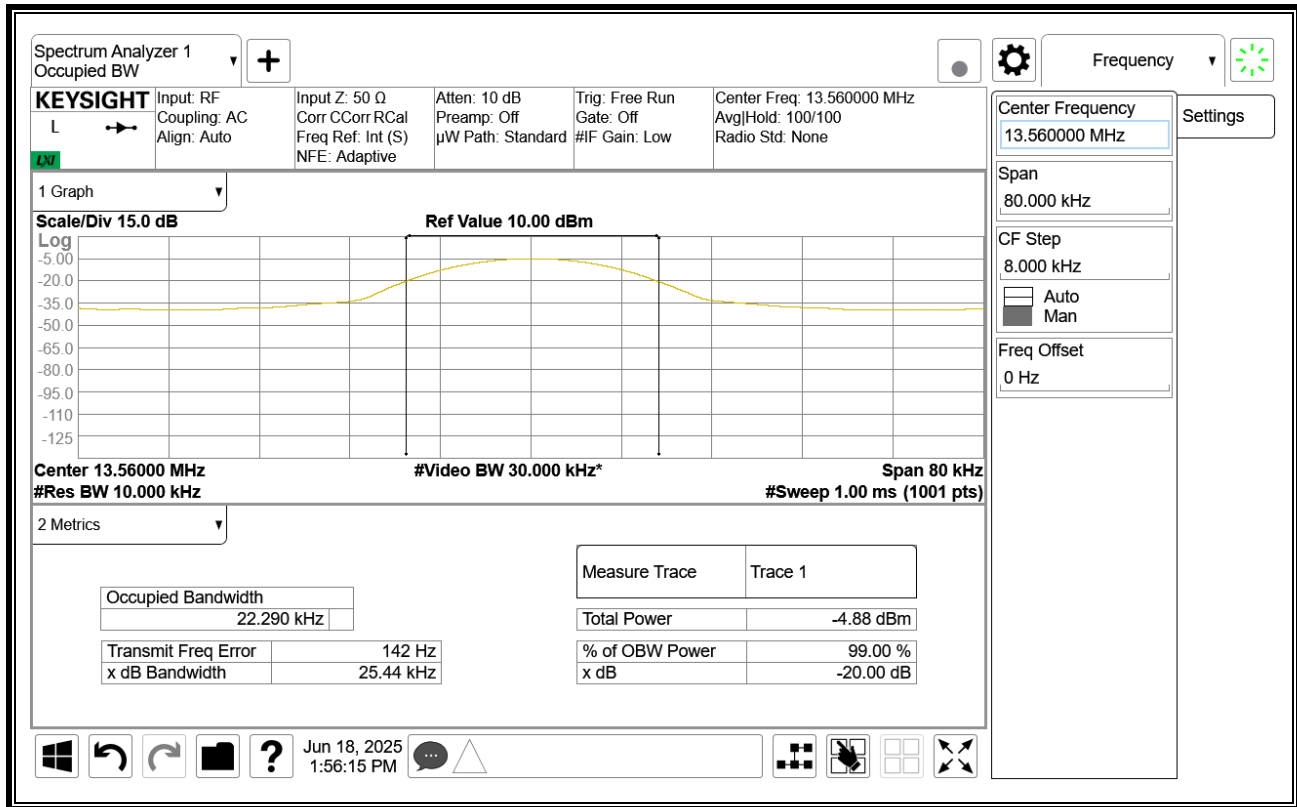
Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
106	13.56	21.702	25.09

8.1. PRIMARY ANTENNA

Type B (Reader Mode), 106 Kbps



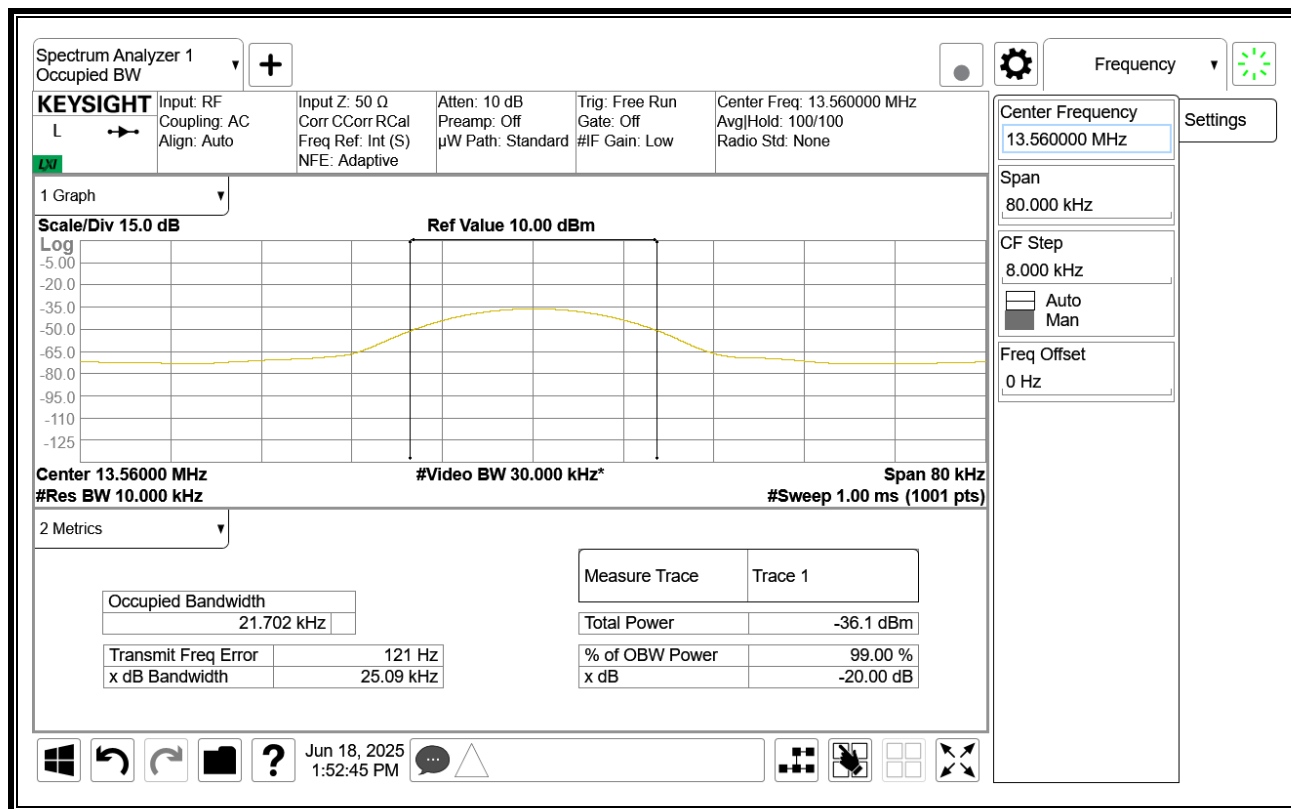
Type B (CE Mode), 106 Kbps

Type B (Tag Mode), 106 Kbps

8.2. SECONDARY ANTENNA

Type B (Reader Mode), 106 Kbps



Type B (Tag Mode), 106 Kbps

9. RADIATED EMISSION TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Annex B.6

IC RSS-GEN, Section 8.9 (Transmitter)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2020

The EUT is an intentional radiator that incorporates a digital device, the highest fundamental frequency generated or used in the device is 13.56 MHz; therefore, the frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater.

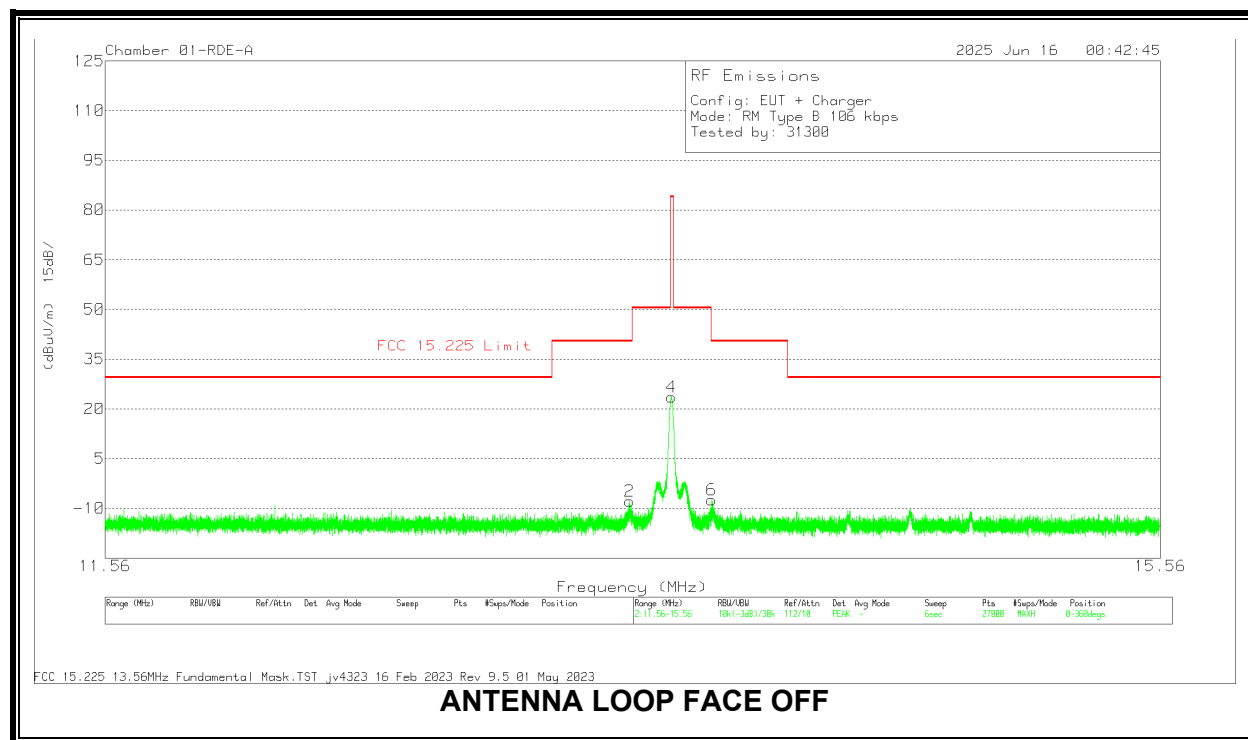
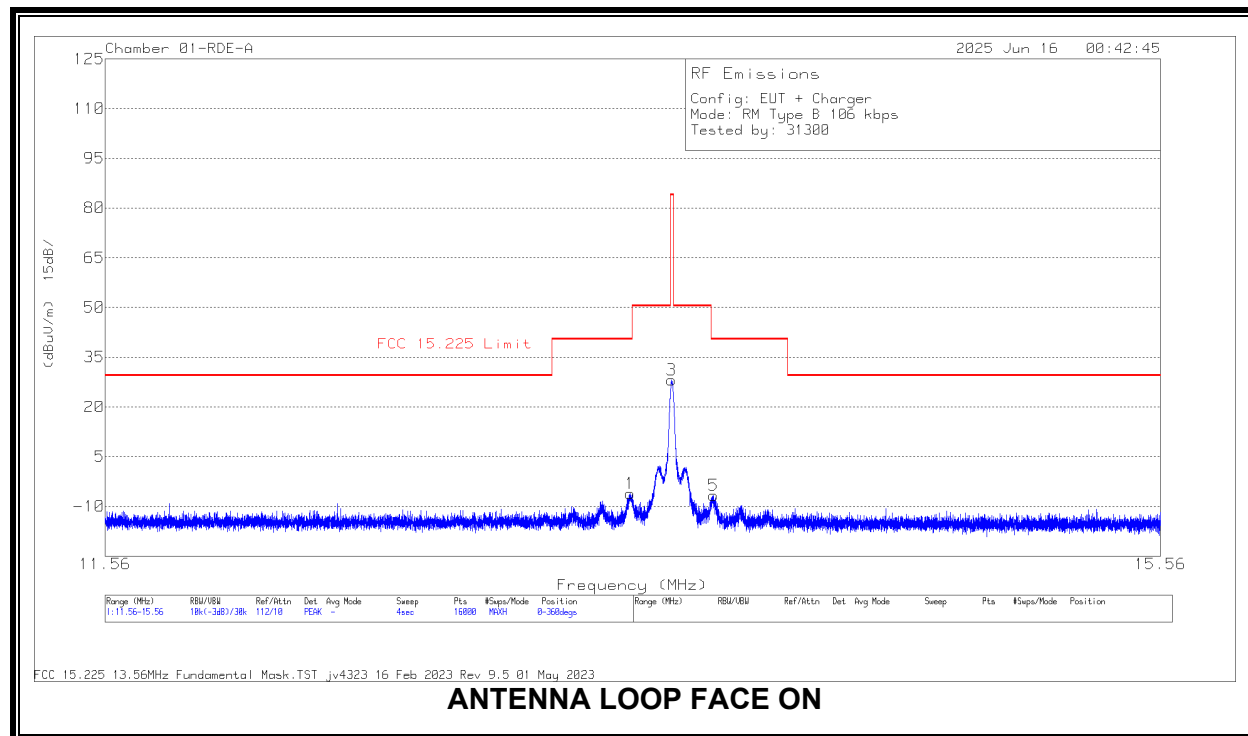
RESULTS

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

9.2. PRIMARY ANTENNA FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER

9.2.1. READER MODE, TYPE B 106Kbps

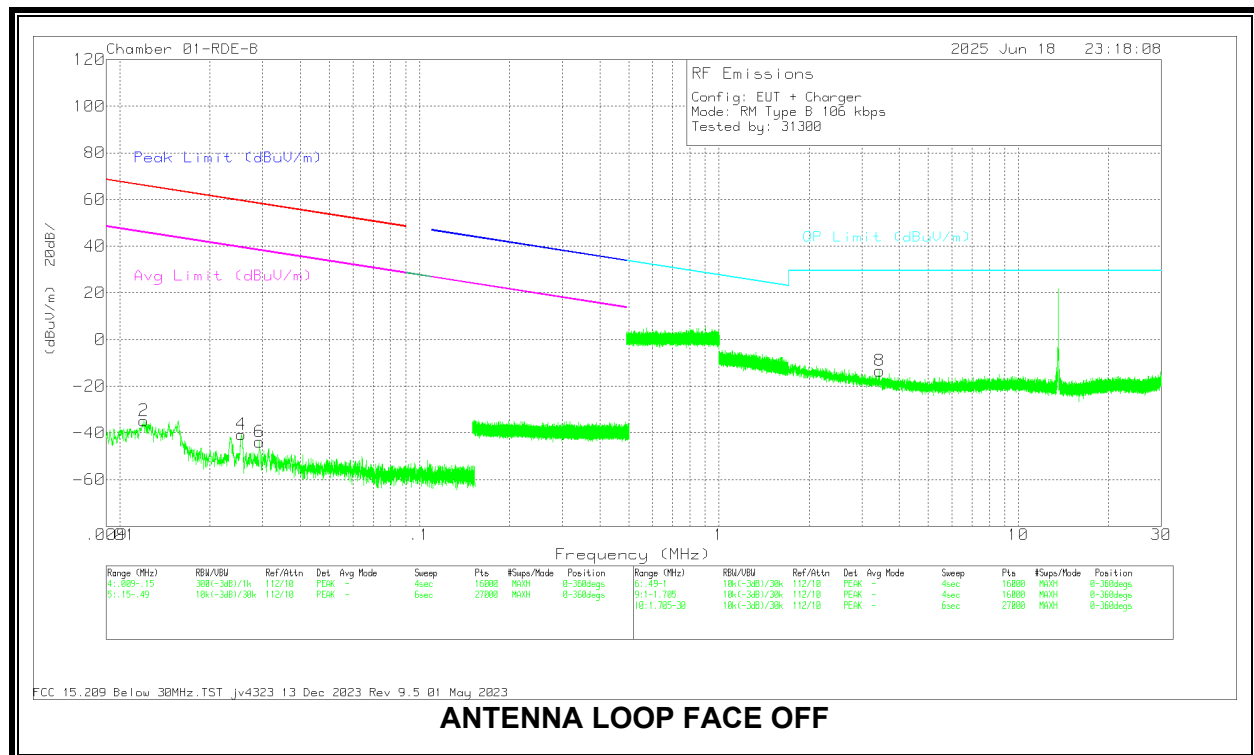
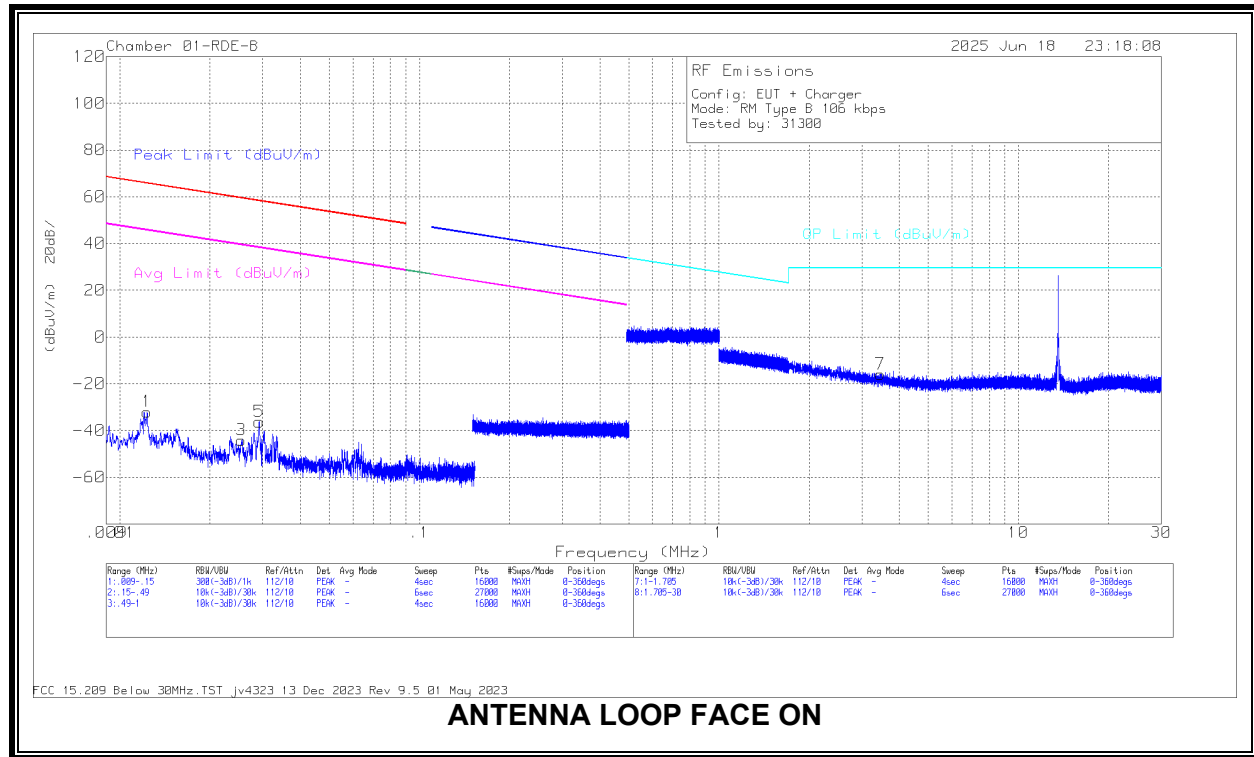
FUNDAMENTAL



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Polarity
1	13.4008	26.64	Pk	33.8	-26.6	-40	-6.16	40.51	-46.67	0-360	Face-On
2	13.3996	25.05	Pk	33.8	-26.6	-40	-7.75	40.51	-48.26	0-360	Face-Off
3	13.5595	60.99	Pk	33.8	-26.6	-40	28.19	84	-55.81	0-360	Face-On
4	13.558	56.37	Pk	33.8	-26.6	-40	23.57	84	-60.43	0-360	Face-Off
5	13.7208	26.27	Pk	33.7	-26.6	-40	-6.63	40.51	-47.14	0-360	Face-On
6	13.714	25.46	Pk	33.7	-26.6	-40	-7.44	40.51	-47.95	0-360	Face-Off

Pk - Peak detector

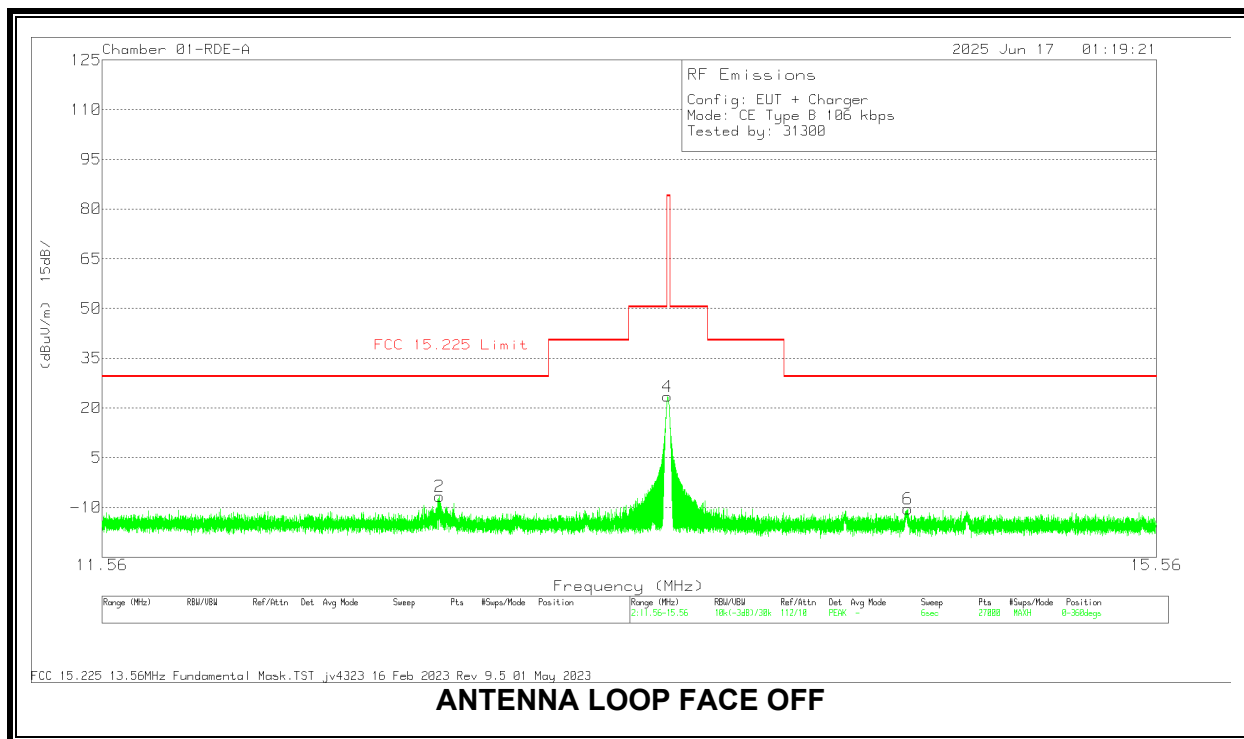
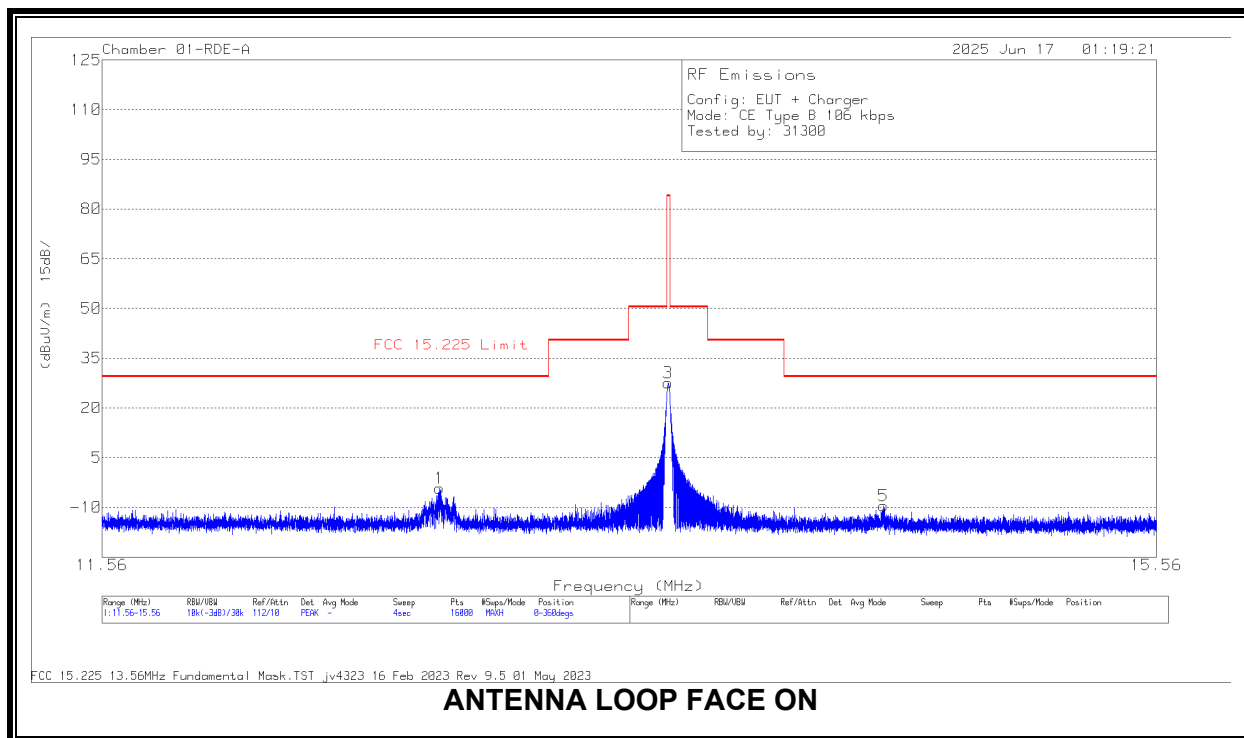
SPURIOUS EMISSION

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dB/m)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
1	.0123	19.21	Pk	60.2	-31.4	-80	-31.99	65.77	-97.76	45.77	-77.76	0-360	Face-On
2	.012	16.43	Pk	60.2	-31.4	-80	-34.77	65.99	-100.76	45.99	-80.76	0-360	Face-Off
3	.0254	9.41	Pk	58.6	-32.1	-80	-44.09	59.49	-103.58	39.49	-83.58	0-360	Face-On
4	.0254	12.86	Pk	58.6	-32.1	-80	-40.64	59.48	-100.12	39.48	-80.12	0-360	Face-Off
5	.0292	17.65	Pk	58.2	-32.1	-80	-36.25	58.29	-94.54	38.29	-74.54	0-360	Face-On
6	.0292	10.11	Pk	58.2	-32.1	-80	-43.79	58.27	-102.06	38.27	-82.06	0-360	Face-Off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
7	3.4646	19.63	Pk	37.6	-32.1	-40	-15.87	29.5	-45.37	0-360	Face-On
8	3.4394	21.05	Pk	37.7	-32.1	-40	-13.35	29.5	-42.85	0-360	Face-Off

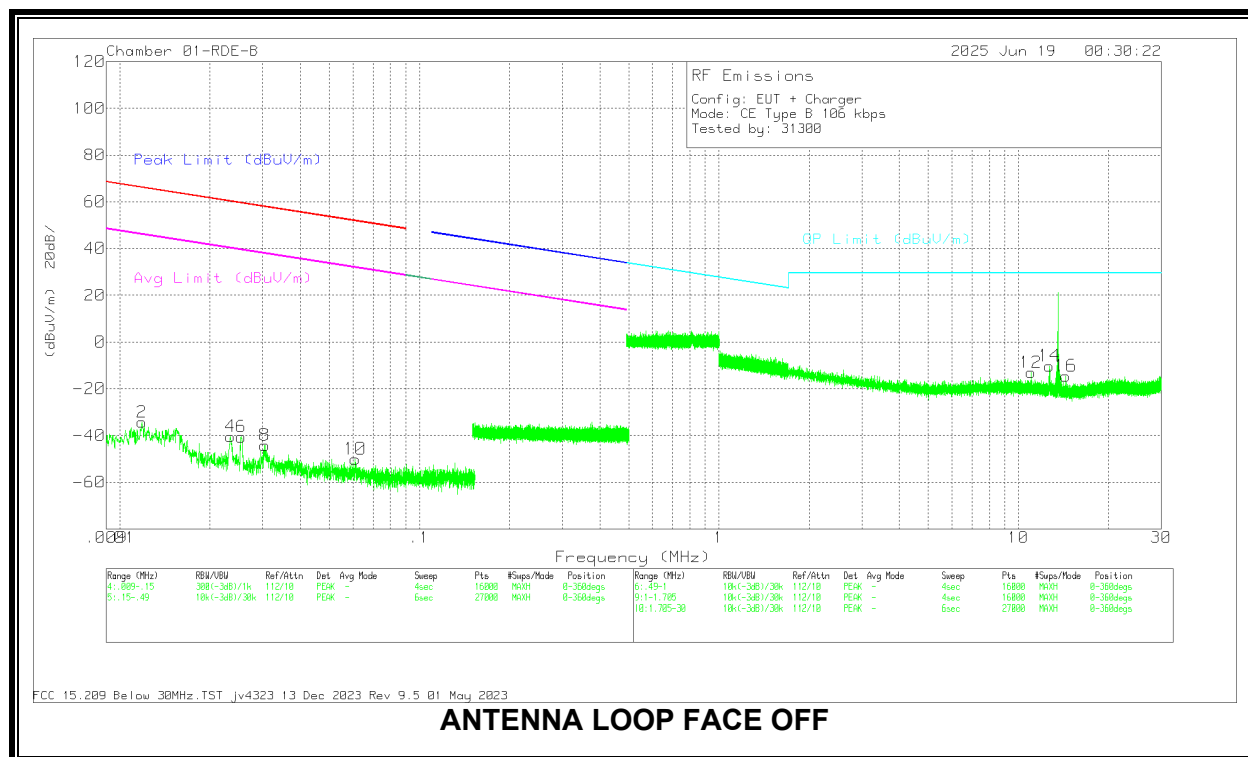
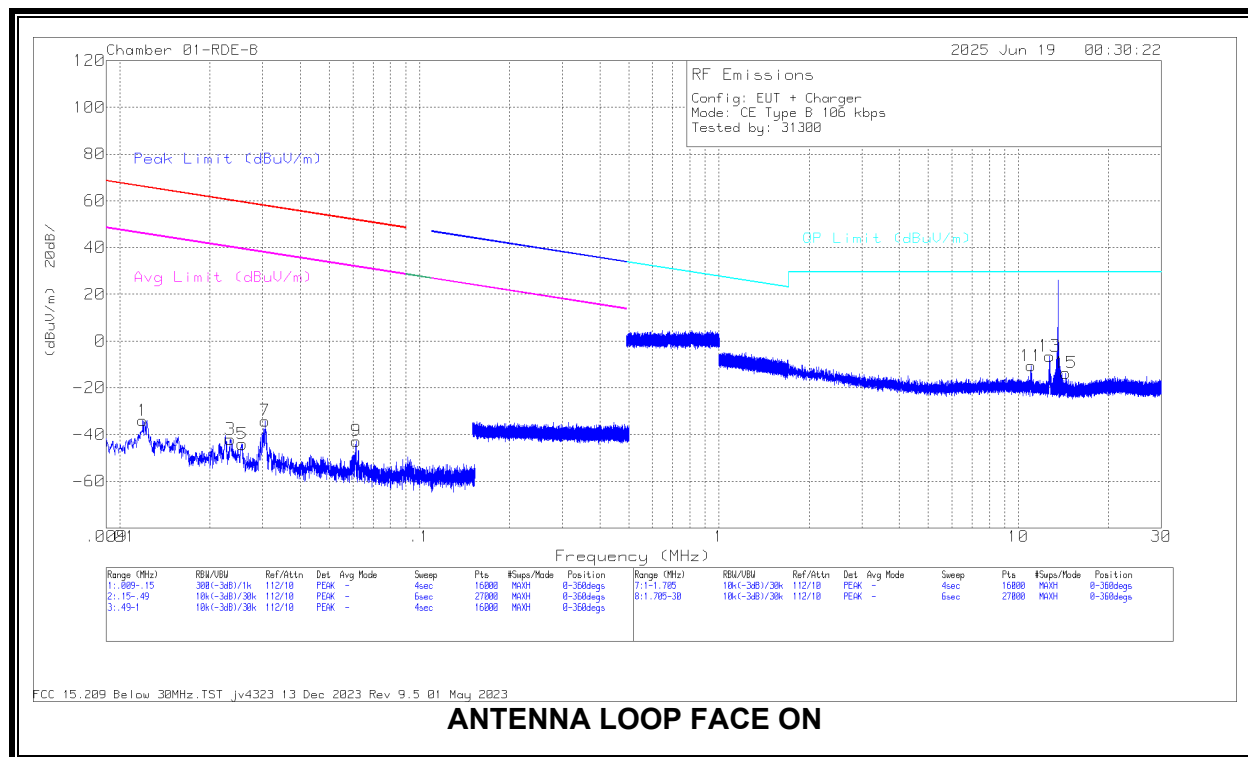
Pk - Peak detector

9.2.2. CE MODE, TYPE B 106Kbps**FUNDAMENTAL 106Kbps**

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Polarity
1	12.7128	28.43	Pk	33.9	-26.6	-40	-4.27	29.54	-33.81	0-360	Face-On
2	12.7125	25.97	Pk	33.9	-26.6	-40	-6.73	29.54	-36.27	0-360	Face-Off
3	13.5596	60.36	Pk	33.8	-26.6	-40	27.56	84	-56.44	0-360	Face-On
4	13.5573	56.29	Pk	33.8	-26.6	-40	23.49	84	-60.51	0-360	Face-Off
5	14.4078	23.49	Pk	33.6	-26.6	-40	-9.51	29.54	-39.05	0-360	Face-On
6	14.5059	22.57	Pk	33.6	-26.6	-40	-10.43	29.54	-39.97	0-360	Face-Off

Pk - Peak detector

SPURIOUS EMISSION 106Kbps

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dBm)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
1	.0119	17.11	Pk	60.3	-31.4	-80	-33.99	66.06	-100.05	46.06	-80.05	0-360	Face-On
2	.0118	16.77	Pk	60.3	-31.4	-80	-34.33	66.12	-100.45	46.12	-80.45	0-360	Face-Off
3	.0234	11.37	Pk	58.8	-32.2	-80	-42.03	60.22	-102.25	40.22	-82.25	0-360	Face-On
4	.0234	13.01	Pk	58.8	-32.2	-80	-40.39	60.19	-100.58	40.19	-80.58	0-360	Face-Off
5	.0256	9.47	Pk	58.6	-32.1	-80	-44.03	58.42	-103.45	39.42	-83.45	0-360	Face-On
6	.0254	12.98	Pk	58.6	-32.1	-80	-40.54	59.5	-100.04	39.5	-80.04	0-360	Face-Off
7	.0305	19.97	Pk	58	-32.1	-80	-34.13	57.89	-82.02	37.89	-72.02	0-360	Face-On
8	.0304	9.96	Pk	58	-32.1	-80	-44.14	57.91	-102.05	37.91	-82.05	0-360	Face-Off
9	.0615	13.25	Pk	56.3	-32.3	-80	-42.75	51.81	-94.56	31.81	-74.56	0-360	Face-On
10	.061	5.9	Pk	56.3	-32.3	-80	-50.1	51.87	-101.97	31.87	-81.97	0-360	Face-Off

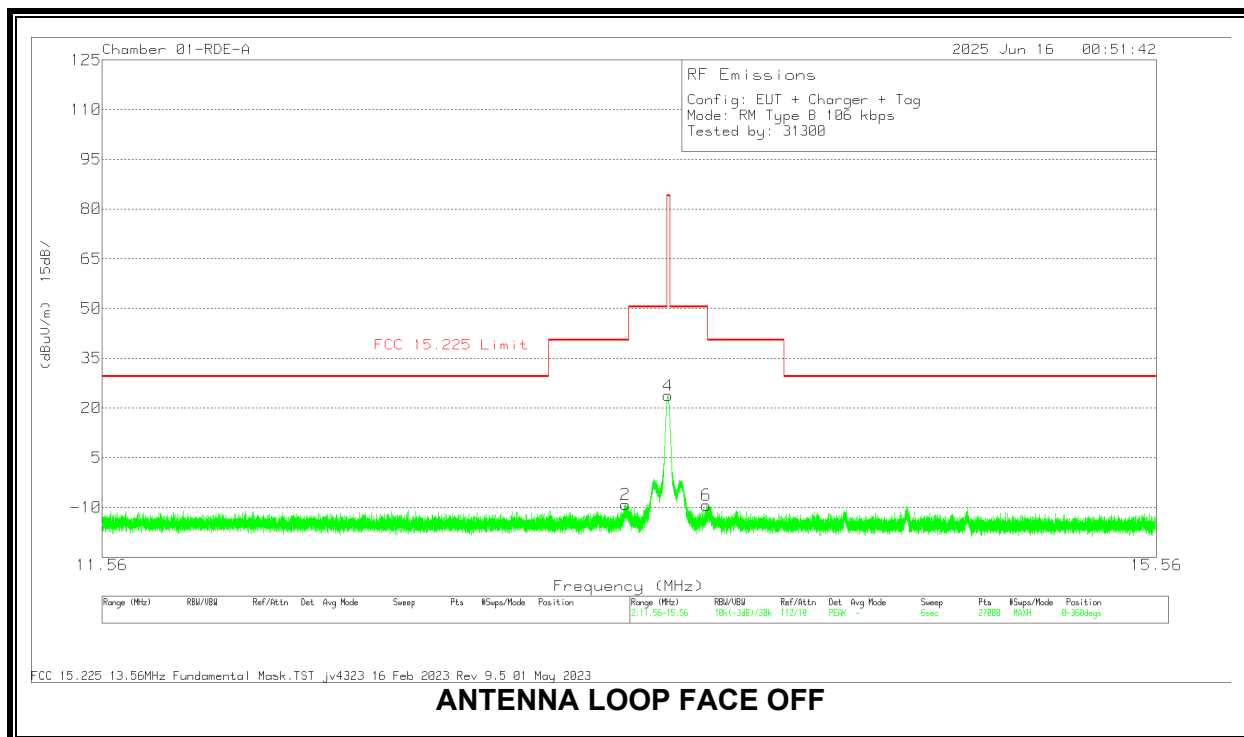
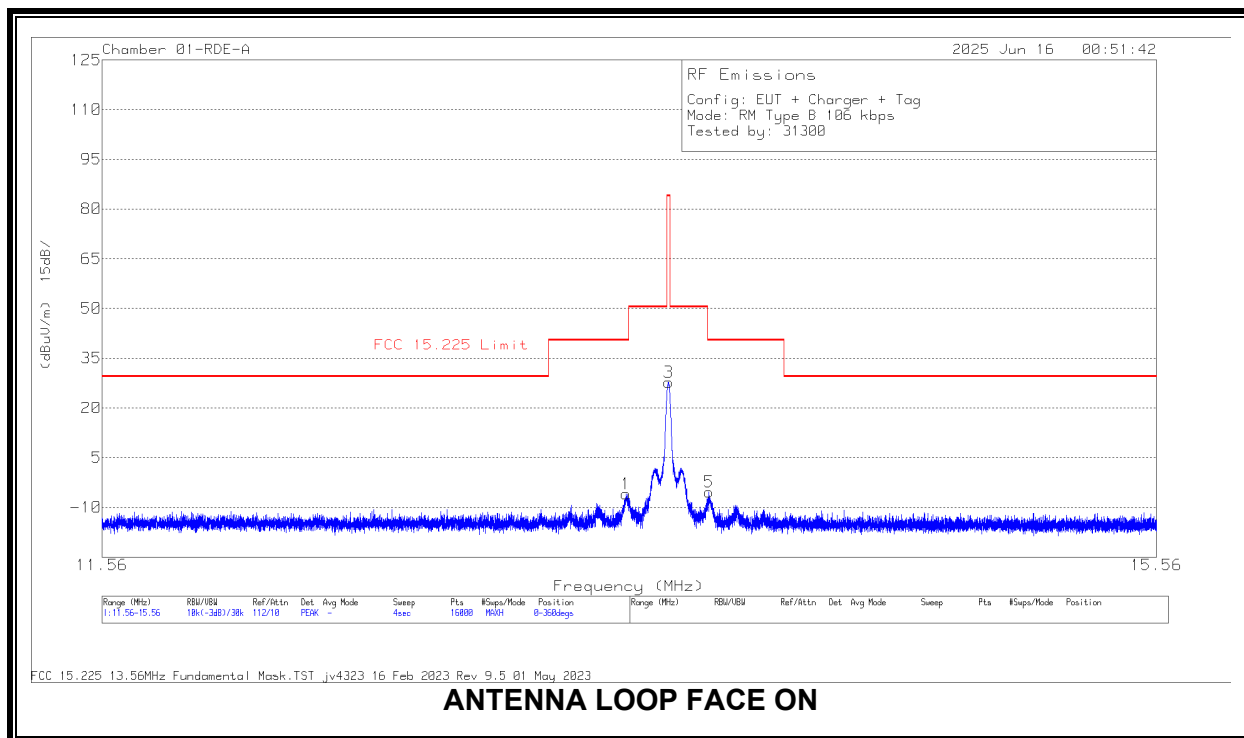
Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dBm)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
11	11.0154	26.96	Pk	34.3	-31.9	-40	-10.64	29.5	-40.14	0-360	Face-On
12	11.0133	24.58	Pk	34.3	-31.9	-40	-13.02	29.5	-42.52	0-360	Face-Off
13	12.7121	31.46	Pk	34	-31.9	-40	-6.44	29.5	-35.94	0-360	Face-On
14	12.7111	27.7	Pk	34	-31.9	-40	-10.2	29.5	-39.7	0-360	Face-Off
15	14.411	24.45	Pk	33.7	-31.8	-40	-13.65	29.5	-43.15	0-360	Face-On
16	14.4068	23.56	Pk	33.7	-31.8	-40	-14.54	29.5	-44.04	0-360	Face-Off

Pk - Peak detector

9.2.3. TAG MODE, TYPE B 106Kbps

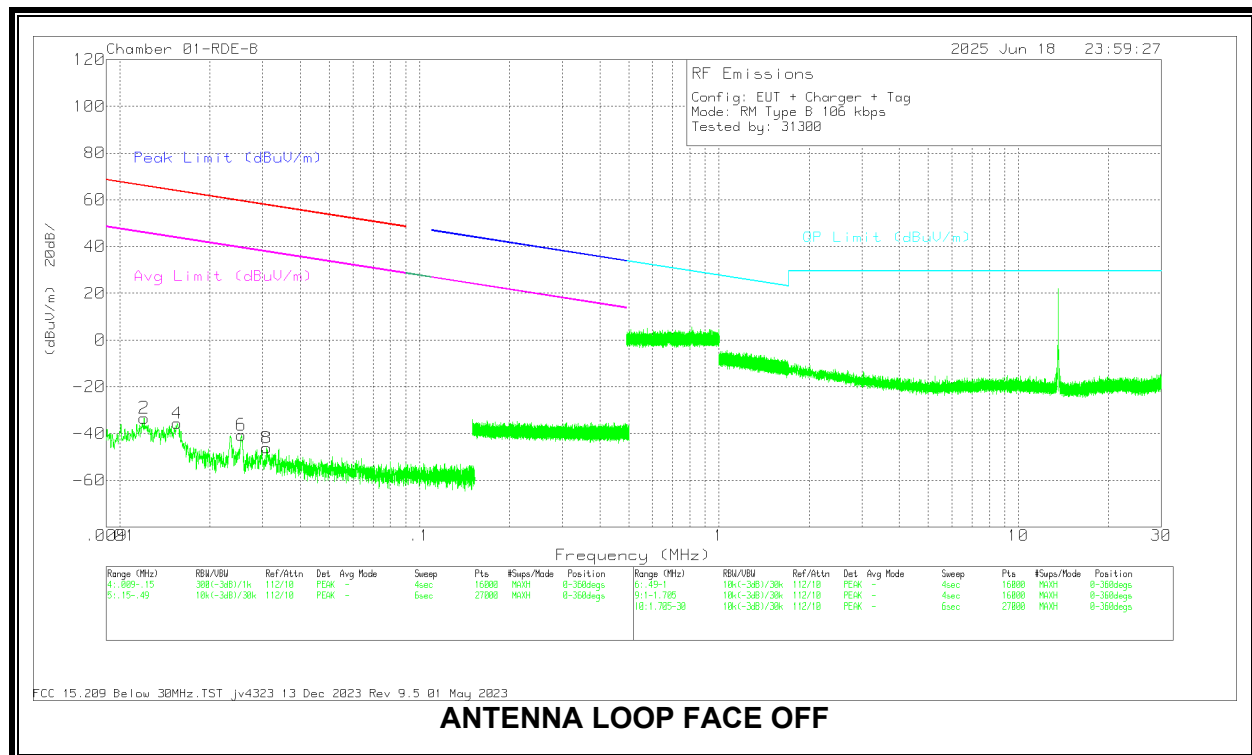
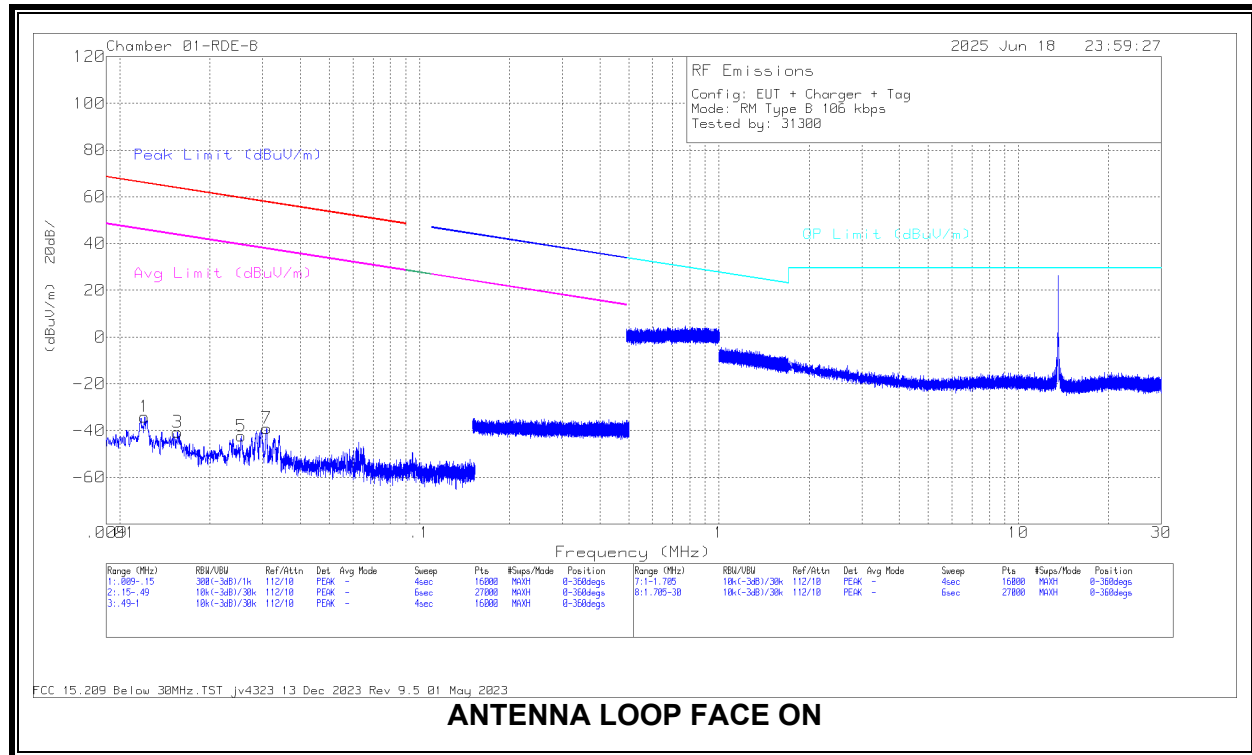
FUNDAMENTAL 106Kbps



DATA

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBUV/m)	FCC 15.225 Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Polarity
1	13.3985	26.89	Pk	33.8	-26.6	-40	-5.91	40.51	-46.42	0-360	Face-On
2	13.3977	23.67	Pk	33.8	-26.6	-40	-9.13	40.51	-49.64	0-360	Face-Off
3	13.5605	60.56	Pk	33.8	-26.6	-40	27.76	84	-56.24	0-360	Face-On
4	13.5579	56.49	Pk	33.8	-26.6	-40	23.69	84	-60.31	0-360	Face-Off
5	13.7165	27.56	Pk	33.7	-26.6	-40	-5.34	40.51	-45.85	0-360	Face-On
6	13.7059	23.55	Pk	33.8	-26.6	-40	-9.25	50.5	-59.75	0-360	Face-Off

Pk - Peak detector

SPURIOUS EMISSION 106Kbps

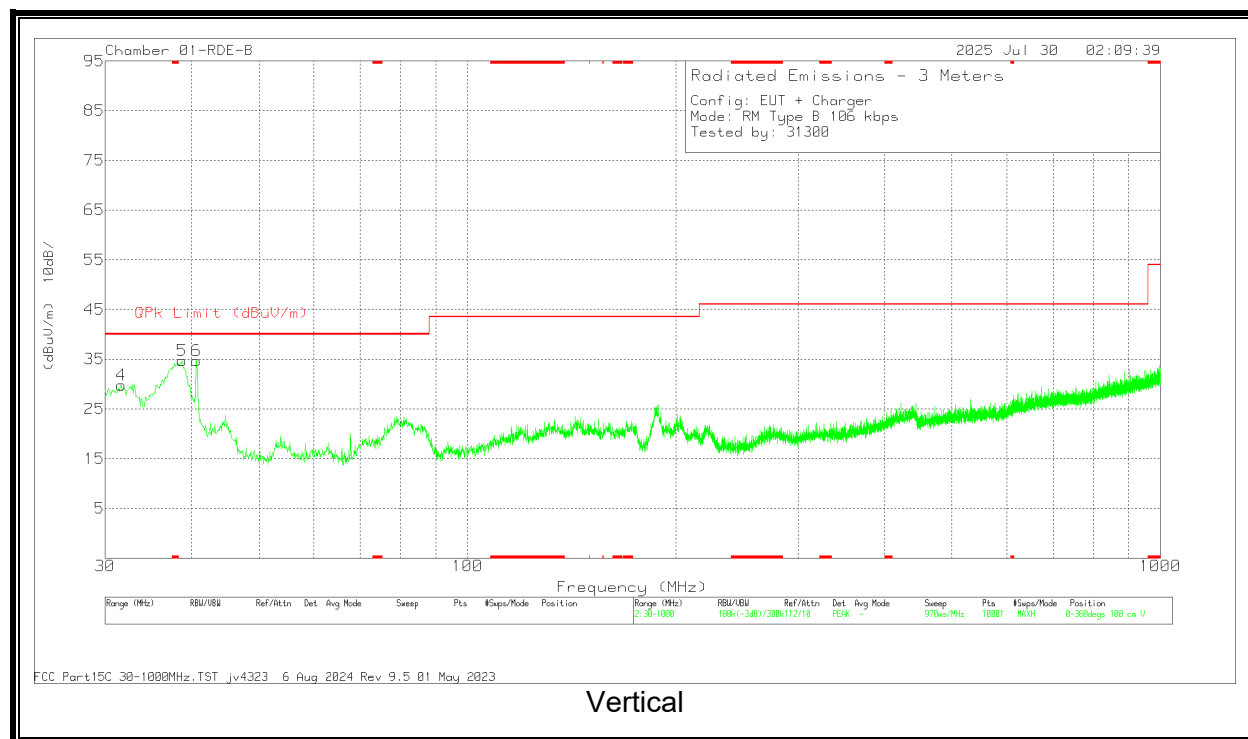
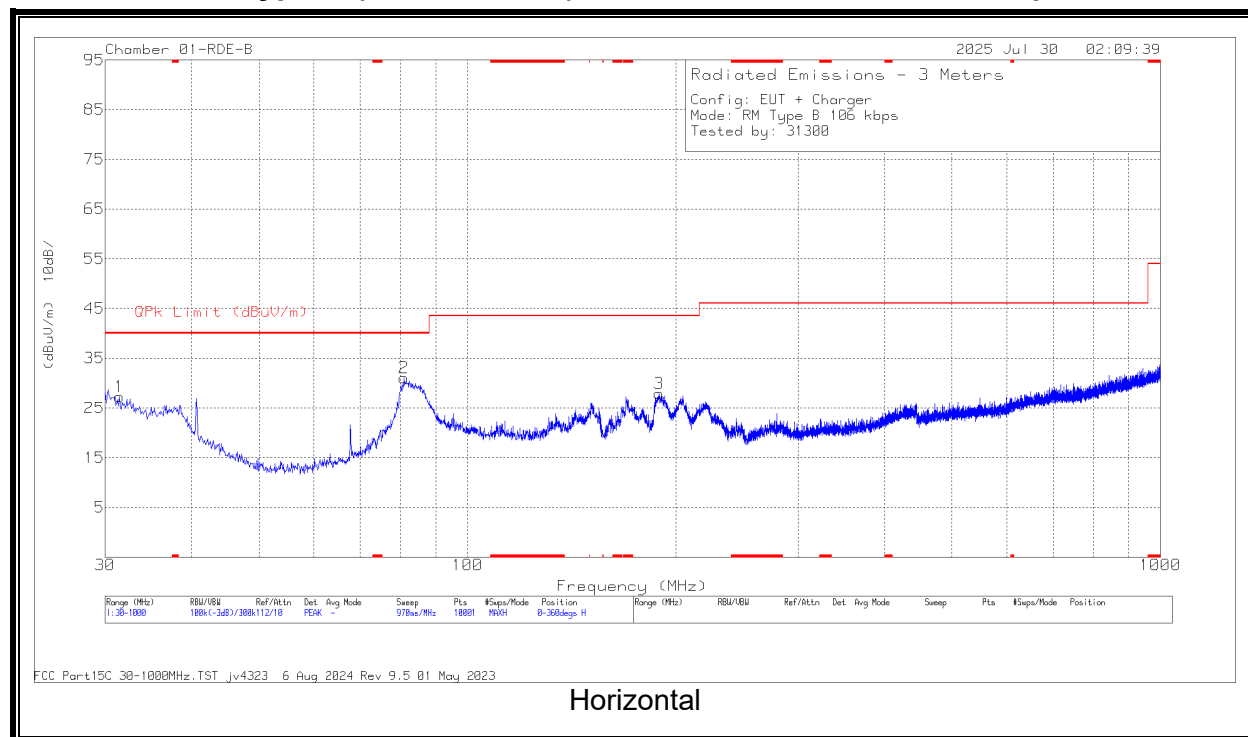
DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
1	.0121	17.09	Pk	60.2	-31.4	-80	-34.11	65.93	-100.04	45.93	-80.04	0-360	Face-On
2	.012	17.79	Pk	60.2	-31.4	-80	-33.41	65.97	-99.38	45.97	-79.38	0-360	Face-Off
3	.0156	11.3	Pk	59.8	-31.8	-80	-40.7	63.75	-104.45	43.75	-84.45	0-360	Face-On
4	.0155	16.39	Pk	59.8	-31.8	-80	-35.61	63.76	-99.37	43.76	-79.37	0-360	Face-Off
5	.0254	11.14	Pk	58.6	-32.1	-80	-42.36	59.5	-101.86	39.5	-81.86	0-360	Face-On
6	.0254	12.85	Pk	58.6	-32.1	-80	-40.64	59.48	-100.12	39.48	-80.12	0-360	Face-Off
7	.0309	15.04	Pk	58	-32.1	-80	-39.06	57.79	-96.85	37.79	-76.85	0-360	Face-On
8	.0309	8	Pk	58	-32.1	-80	-46.1	57.79	-103.89	37.79	-83.89	0-360	Face-Off

Pk - Peak detector

9.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER

9.3.1. Type B (Reader Mode), SPURIOUS EMISSION 106Kbps

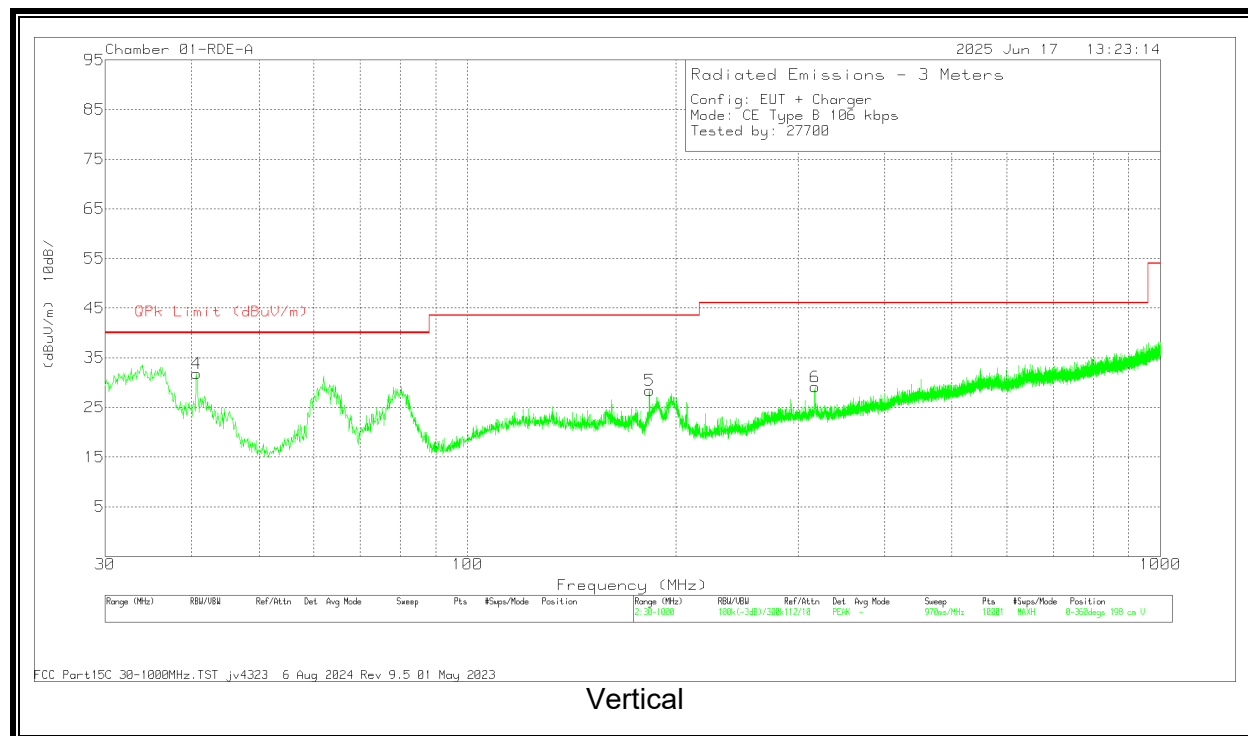
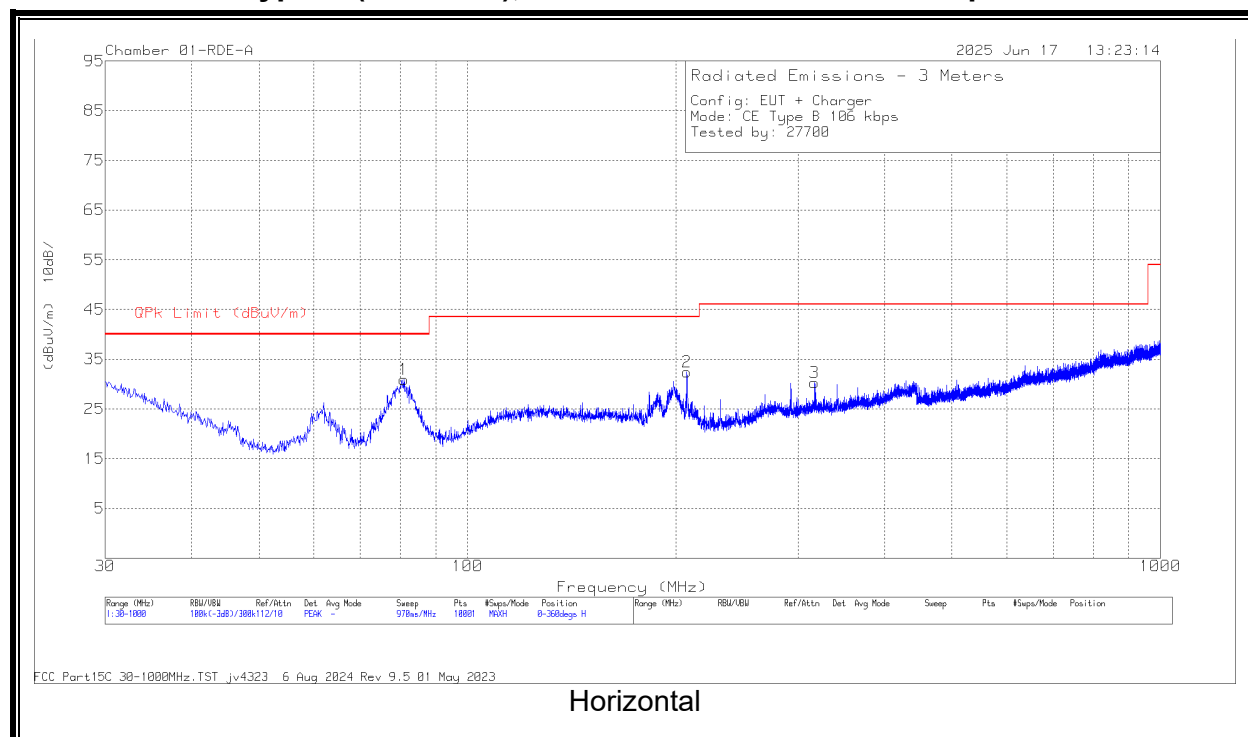


DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.455	32.58	Pk	26.2	-31.5	27.28	40	-12.72	0-360	399	H
4	31.649	35.2	Pk	26.1	-31.5	29.8	40	-10.2	0-360	100	V
5	38.73	44.75	Pk	21.4	-31.4	34.75	40	-5.25	0-360	100	V
	38.7802	38.88	Qp	21.4	-31.4	28.88	40	-11.12	153	104	V
6	40.67	46.08	Pk	20	-31.4	34.68	40	-5.32	0-360	100	V
	40.6796	44.09	Qp	20	-31.4	32.69	40	-7.31	138	112	V
2	81.022	48.54	Pk	13.4	-30.9	31.04	40	-8.96	0-360	299	H
3	189.08	40.92	Pk	17.2	-30.2	27.92	43.52	-15.6	0-360	199	H

Pk - Peak detector

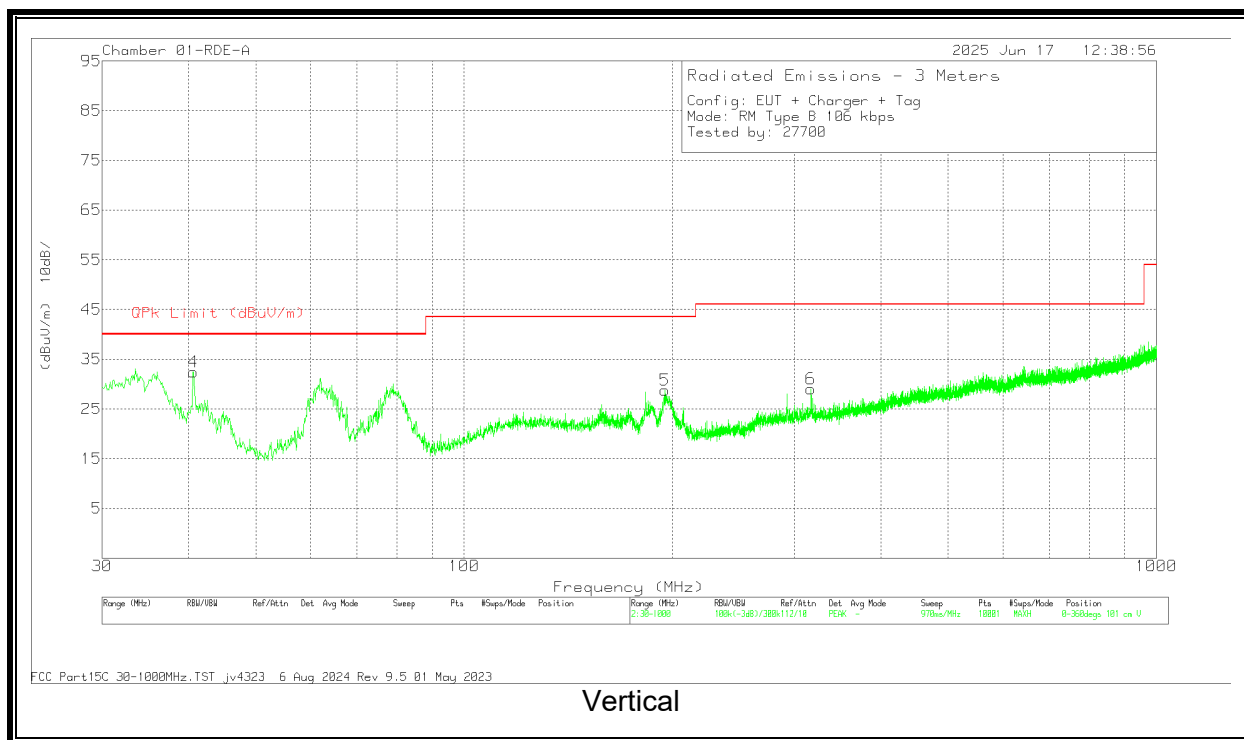
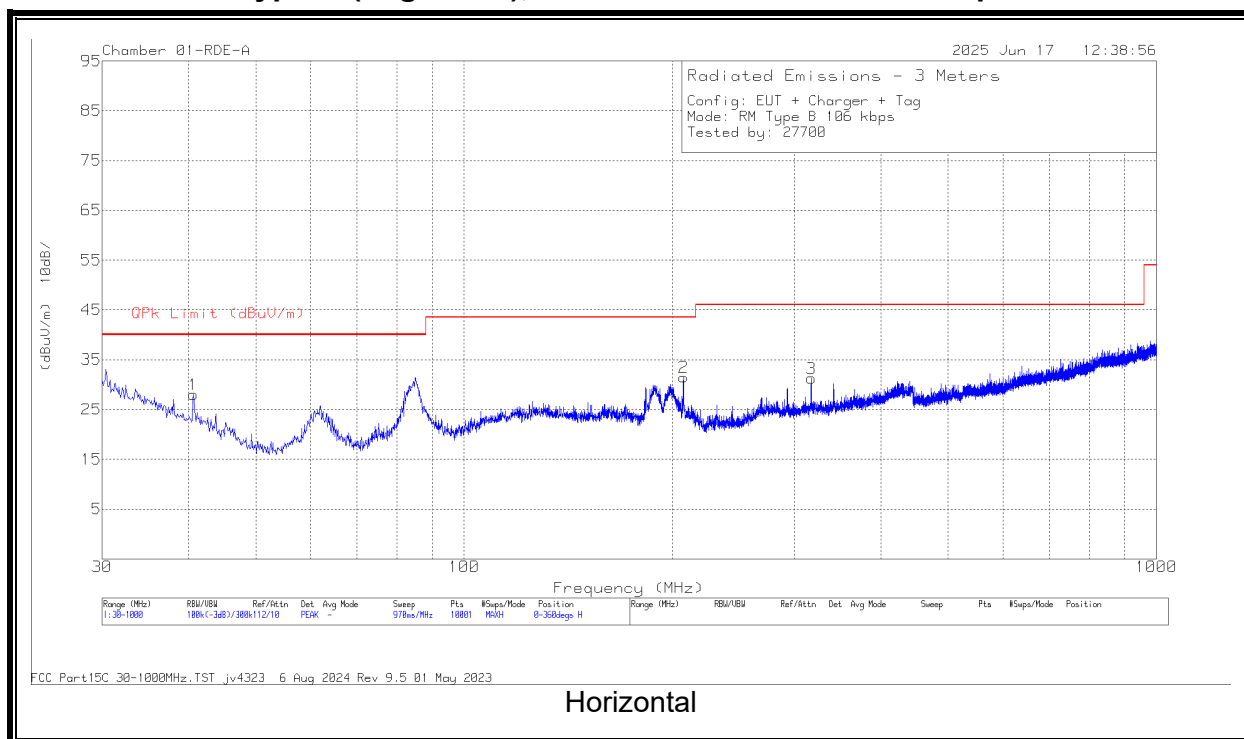
Qp - Quasi-Peak detector

9.3.2. Type B (CE Mode), SPURIOUS EMISSION 106Kbps

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	230634 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	40.67	39.06	Pk	18.9	-26.1	31.86	40	-8.14	0-360	100	V
1	81.022	43.1	Pk	13.3	-25.5	30.9	40	-9.1	0-360	198	H
5	183.066	35.72	Pk	17.1	-24.4	28.42	43.52	-15.1	0-360	100	V
2	207.316	40.28	Pk	16.3	-24.1	32.48	43.52	-11.04	0-360	98	H
3	317.023	33.87	Pk	19.8	-23.4	30.27	46.02	-15.75	0-360	98	H
6	317.12	32.7	Pk	19.8	-23.4	29.1	46.02	-16.92	0-360	100	V

Pk - Peak detector

9.3.3. Type B (Tag Mode), SPURIOUS EMISSION 106Kbps

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	230634 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	35.17	Pk	18.9	-26.1	27.97	40	-12.03	0-360	299	H
4	40.694	38.51	Qp	18.9	-26.1	31.31	40	-8.69	75	108	V
5	194.997	35.1	Pk	17.9	-24.2	28.8	43.52	-14.72	0-360	101	V
2	207.413	39.29	Pk	16.3	-24.1	31.49	43.52	-12.03	0-360	101	H
6	316.926	32.59	Pk	19.8	-23.4	28.99	46.02	-17.03	0-360	101	V
3	317.314	34.84	Pk	19.8	-23.4	31.24	46.02	-14.78	0-360	101	H

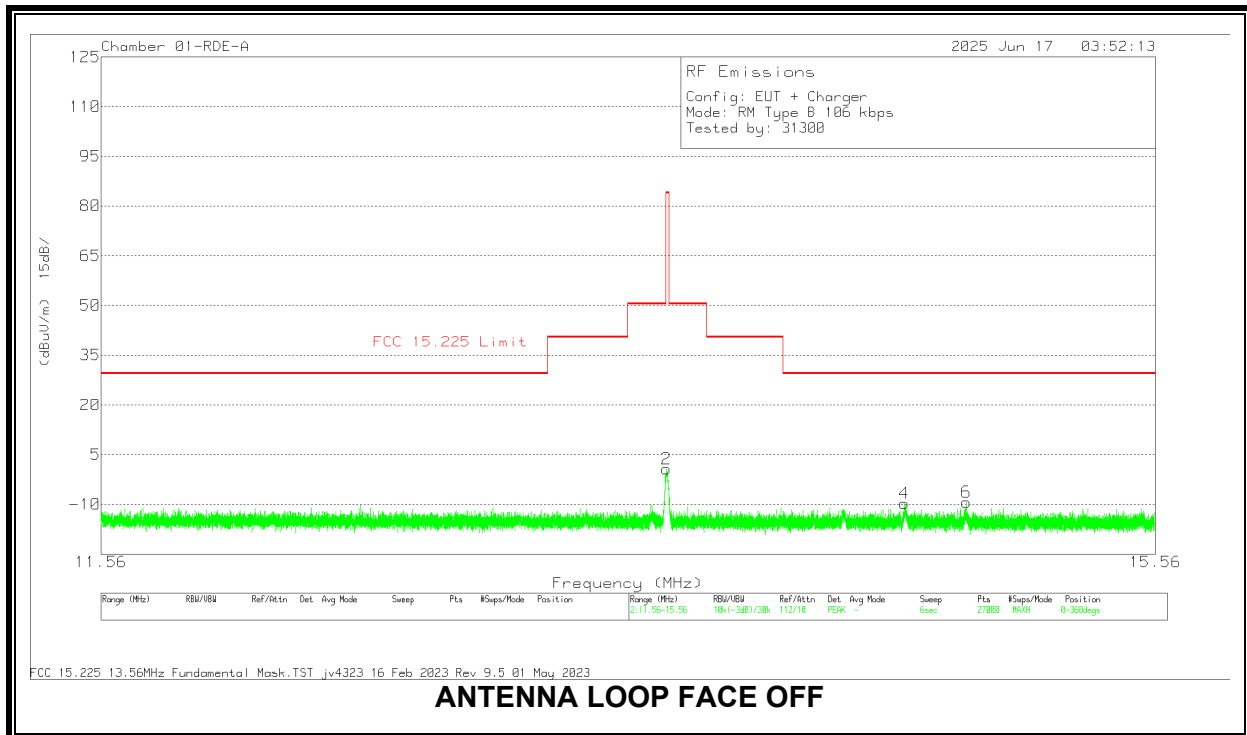
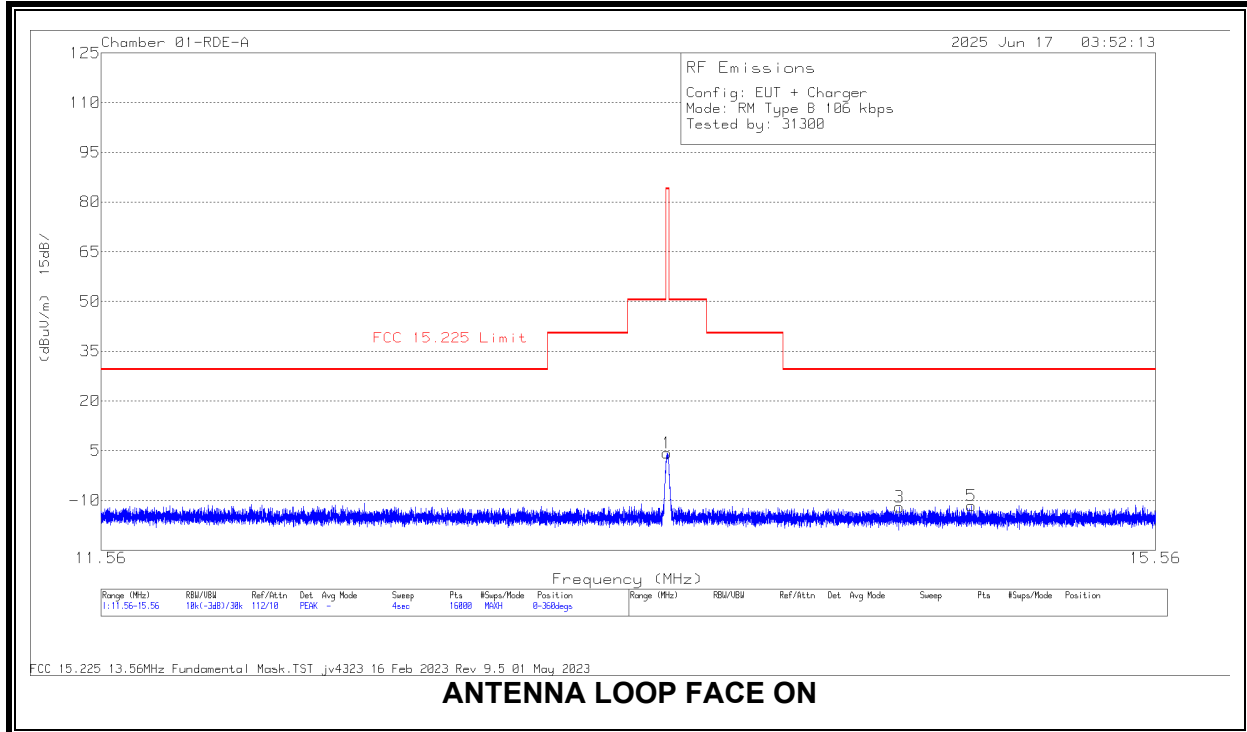
Pk - Peak detector

Qp - Quasi-Peak detector

9.4. SECONDARY ANTENNA FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER

9.4.1. READER MODE, TYPE B 106Kbps

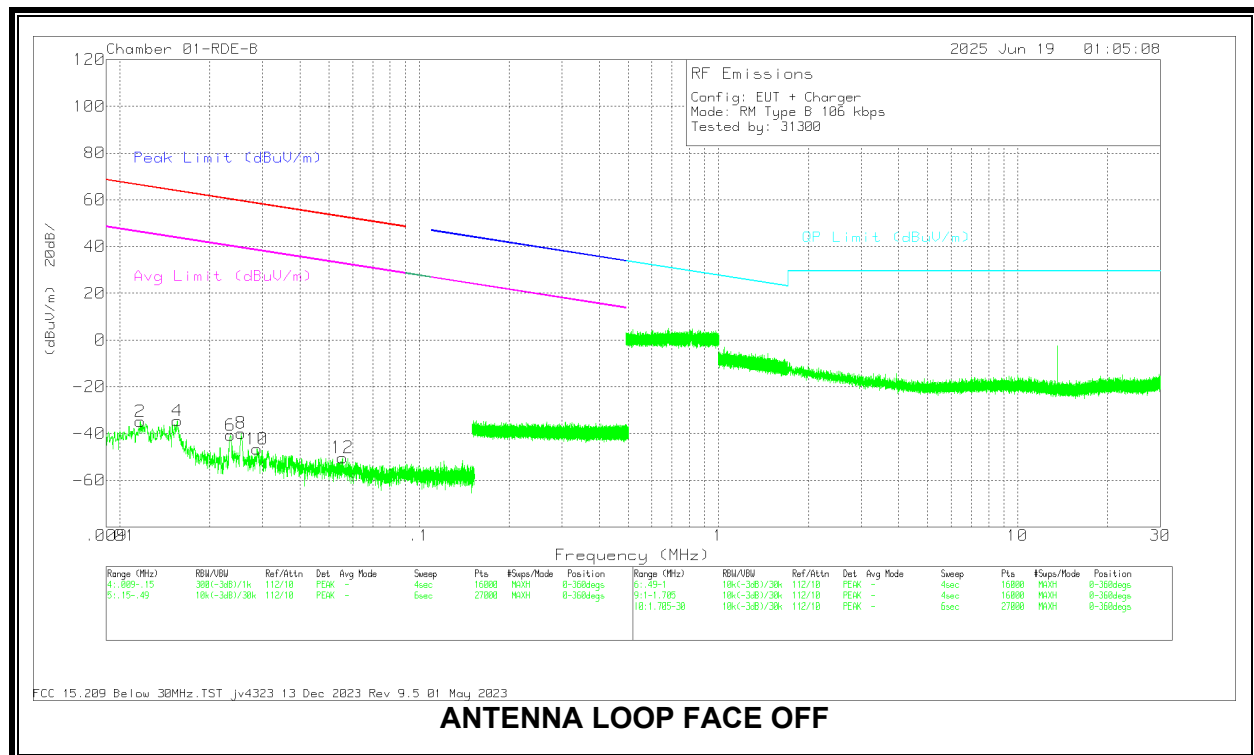
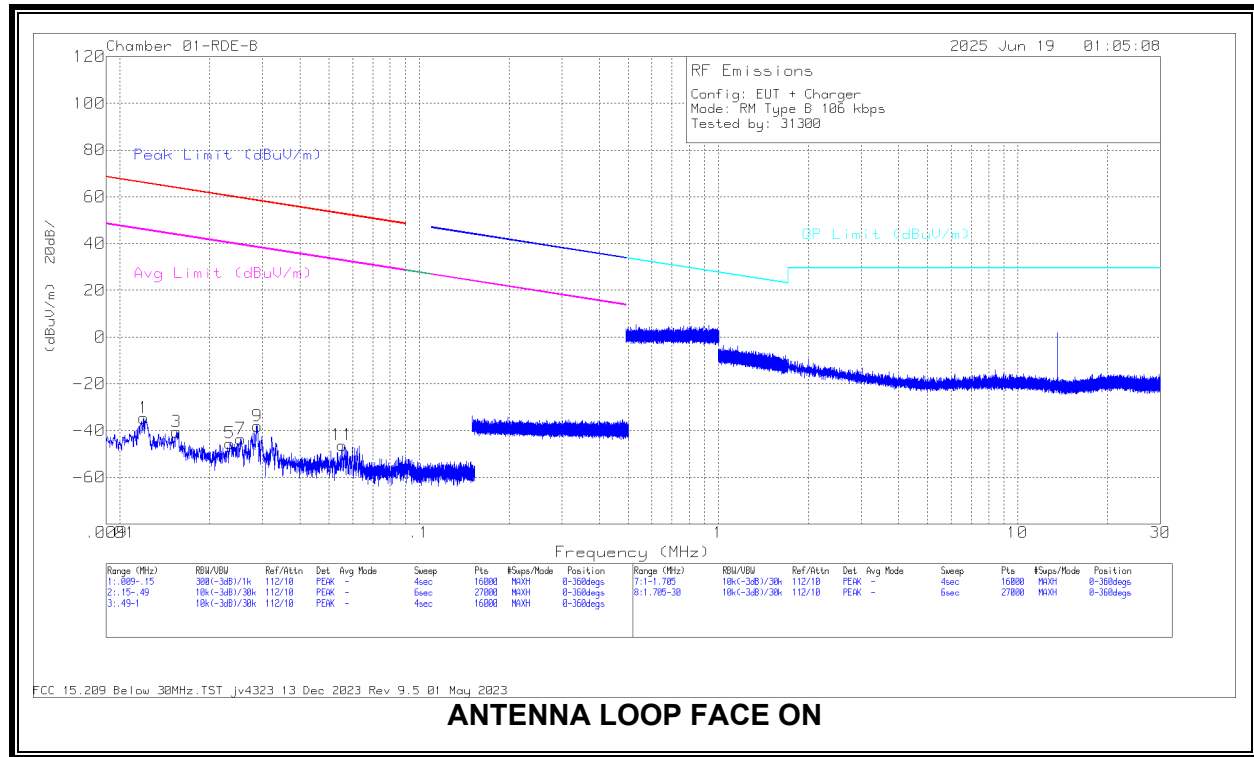
FUNDAMENTAL



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Antenna Polarity
1	13.5588	37.09	Pk	33.8	-26.6	-40	4.29	84	-79.71	0-360	Face-On
2	13.5568	33.48	Pk	33.8	-26.6	-40	.68	84	-83.32	0-360	Face-Off
3	14.4755	21.03	Pk	33.6	-26.6	-40	-11.97	29.54	-41.51	0-360	Face-On
4	14.4971	23.25	Pk	33.6	-26.6	-40	-9.75	29.54	-39.29	0-360	Face-Off
5	14.774	21.23	Pk	33.6	-26.5	-40	-11.67	29.54	-41.21	0-360	Face-On
6	14.7519	23.63	Pk	33.6	-26.5	-40	-9.27	29.54	-38.81	0-360	Face-Off

Pk - Peak detector

SPURIOUS EMISSION

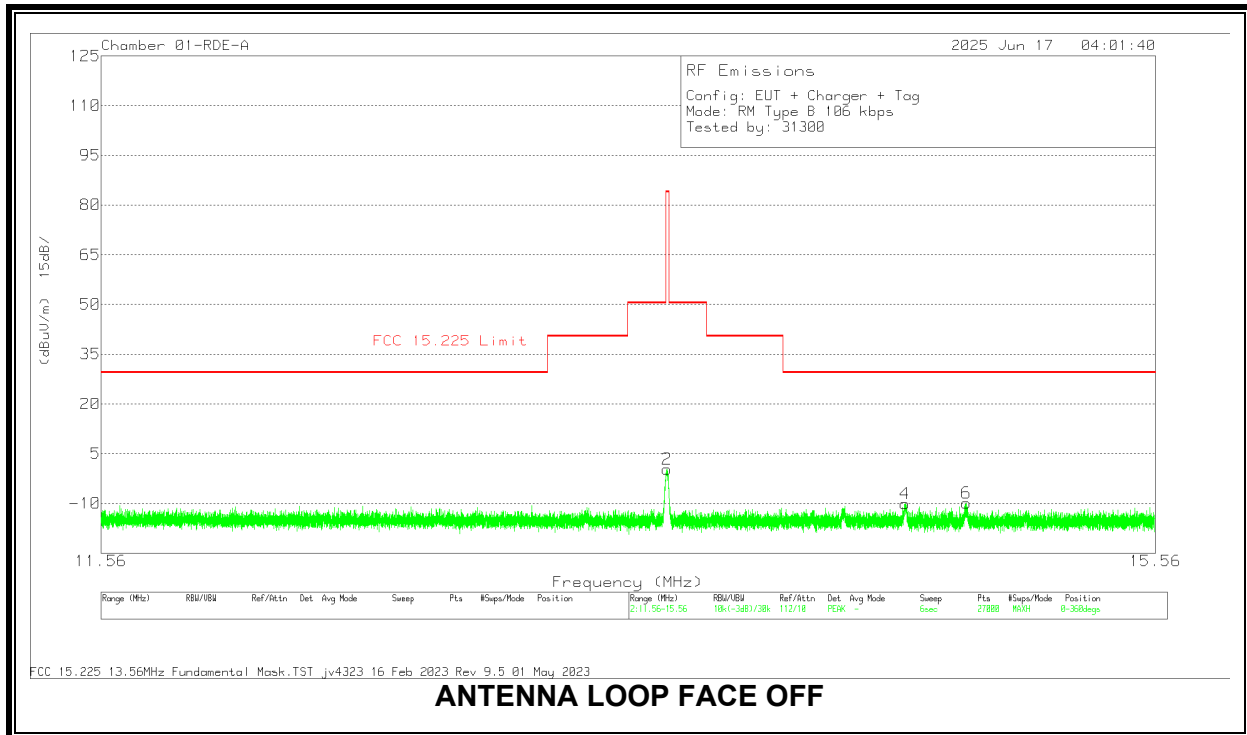
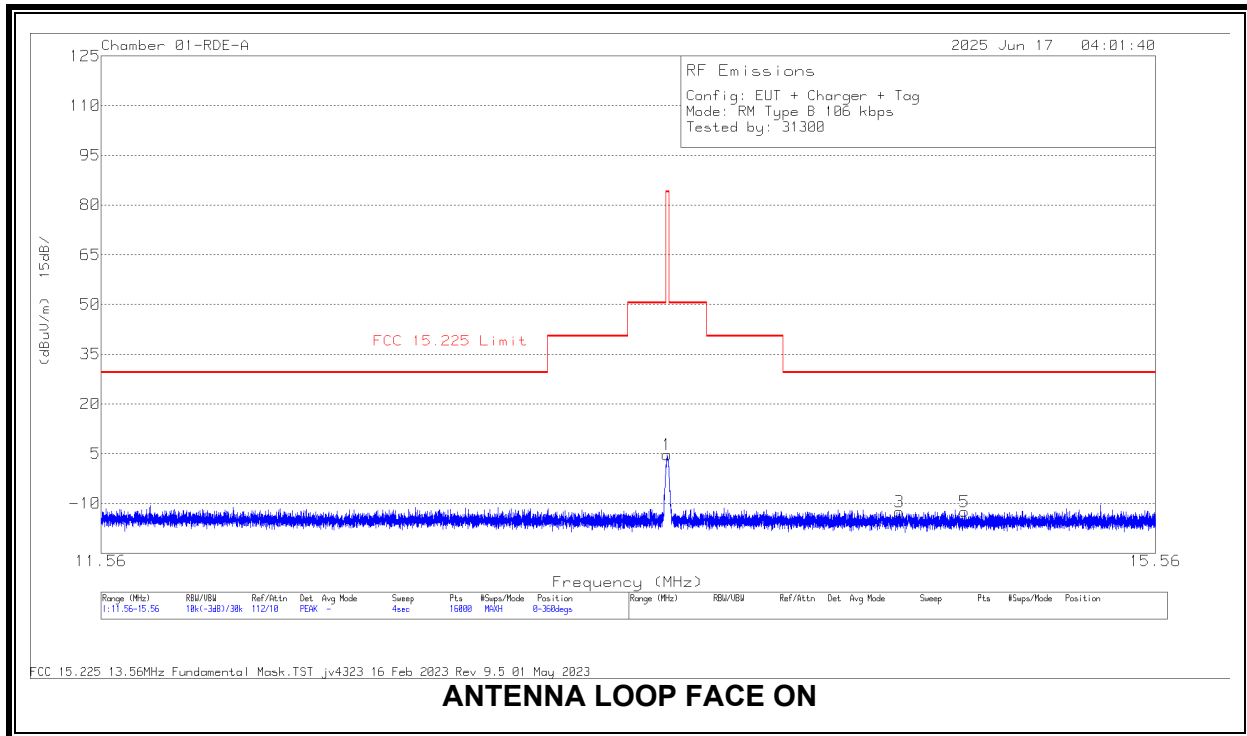
DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Polarity
1	.012	16.57	Pk	60.2	-31.4	-80	-34.63	66	-100.63	46	-80.63	0-360	Face-On
2	.0117	16.3	Pk	60.3	-31.4	-80	-34.8	66.22	-101.02	46.22	-81.02	0-360	Face-Off
3	.0155	11.36	Pk	59.8	-31.7	-80	-40.54	63.79	-104.33	43.79	-84.33	0-360	Face-On
4	.0156	17.47	Pk	59.8	-31.8	-80	-34.53	63.74	-98.27	43.74	-78.27	0-360	Face-Off
5	.0233	7.95	Pk	58.8	-32.2	-80	-45.45	60.23	-105.68	40.23	-85.68	0-360	Face-On
6	.0234	12.61	Pk	58.8	-32.2	-80	-40.79	60.19	-100.98	40.19	-80.98	0-360	Face-Off
7	.0253	9.86	Pk	58.6	-32.1	-80	-43.64	59.51	-103.15	39.51	-83.15	0-360	Face-On
8	.0254	13.61	Pk	58.6	-32.1	-80	-39.89	59.48	-99.37	39.48	-79.37	0-360	Face-Off
9	.0288	15.8	Pk	58.2	-32.1	-80	-38.1	58.39	-96.49	38.39	-76.49	0-360	Face-On
10	.0287	7.22	Pk	58.2	-32.1	-80	-46.68	58.42	-105.1	38.42	-85.1	0-360	Face-Off
11	.0554	9.24	Pk	56.7	-32.2	-80	-46.26	52.72	-98.98	32.72	-78.98	0-360	Face-On
12	.0555	5.16	Pk	56.7	-32.2	-80	-50.34	52.7	-103.04	32.7	-83.04	0-360	Face-Off

Pk - Peak detector

9.4.2. TAG MODE, TYPE B 106Kbps

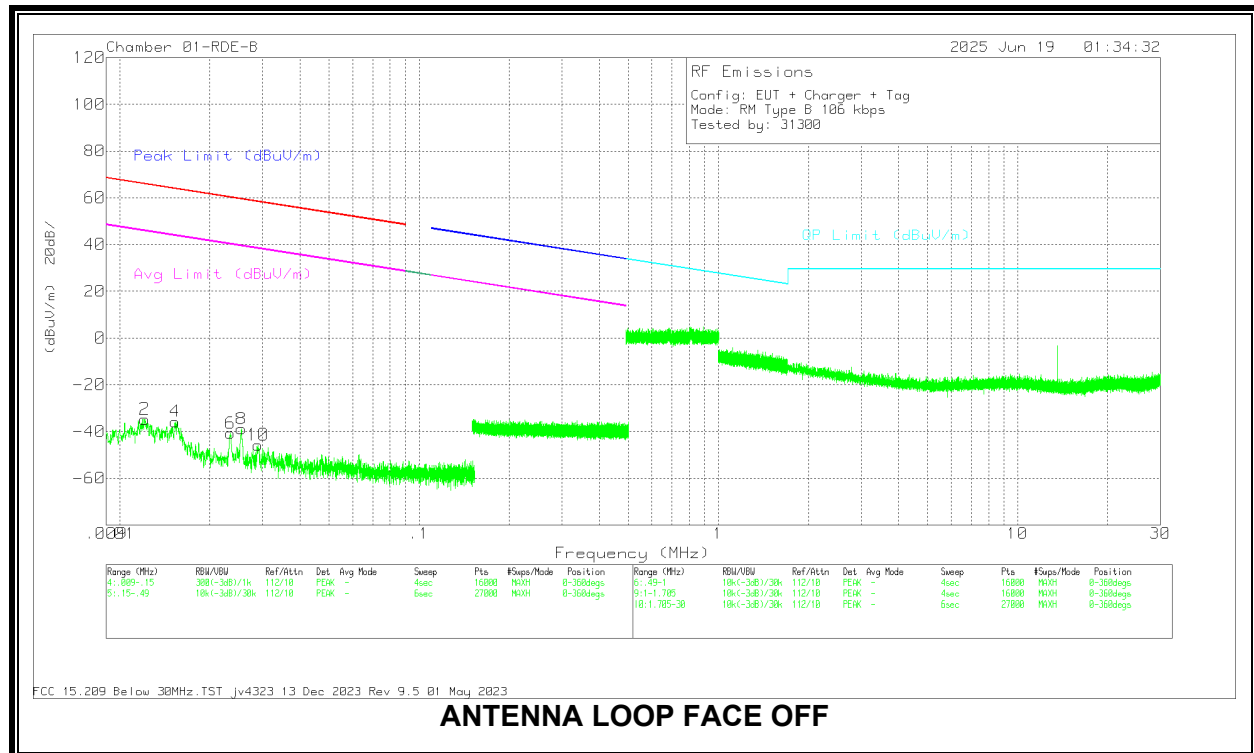
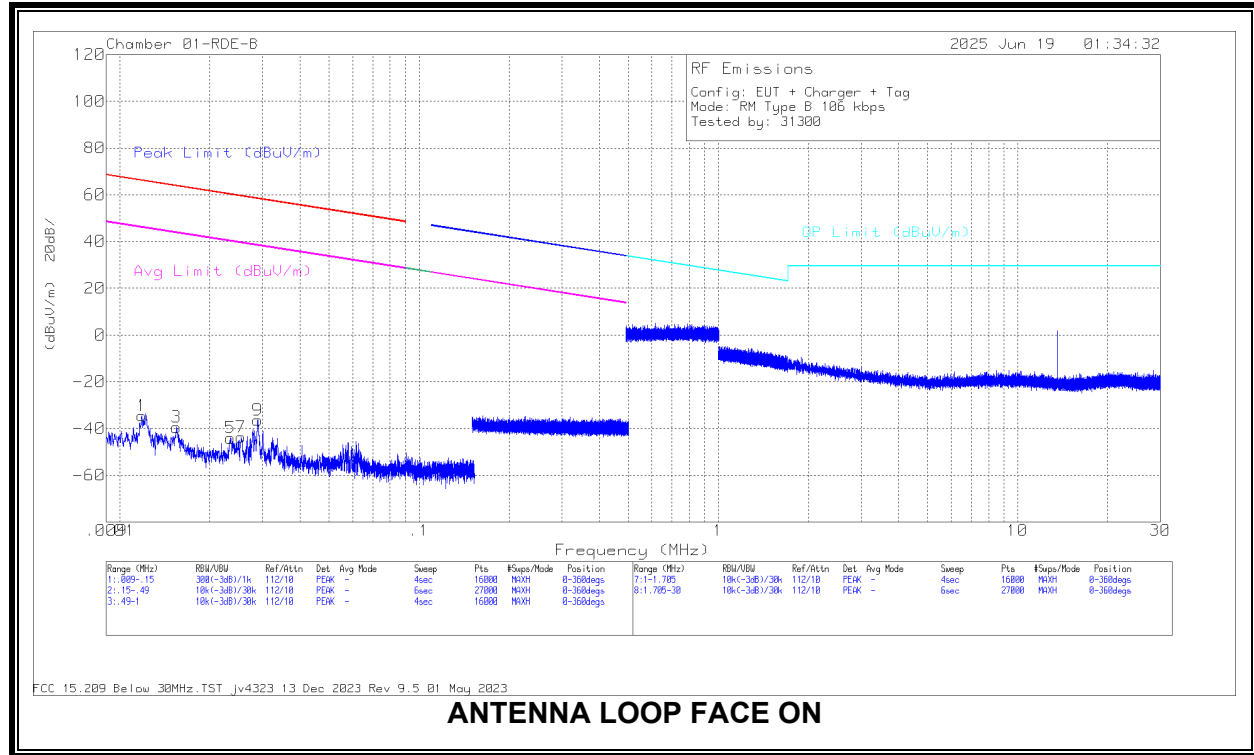
FUNDAMENTAL 106Kbps



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Antenna Polarity
1	13.5588	37.45	Pk	33.8	-26.6	-40	4.65	84	-79.35	0-360	Face-On
2	13.5583	33.11	Pk	33.8	-26.6	-40	.31	84	-83.69	0-360	Face-Off
3	14.4753	20.48	Pk	33.6	-26.6	-40	-12.52	29.54	-42.06	0-360	Face-On
4	14.4987	22.87	Pk	33.6	-26.6	-40	-10.13	29.54	-39.67	0-360	Face-Off
5	14.7445	20.44	Pk	33.6	-26.5	-40	-12.46	29.54	-42	0-360	Face-On
6	14.7512	23.06	Pk	33.6	-26.5	-40	-9.84	29.54	-39.38	0-360	Face-Off

Pk - Peak detector

SPURIOUS EMISSION

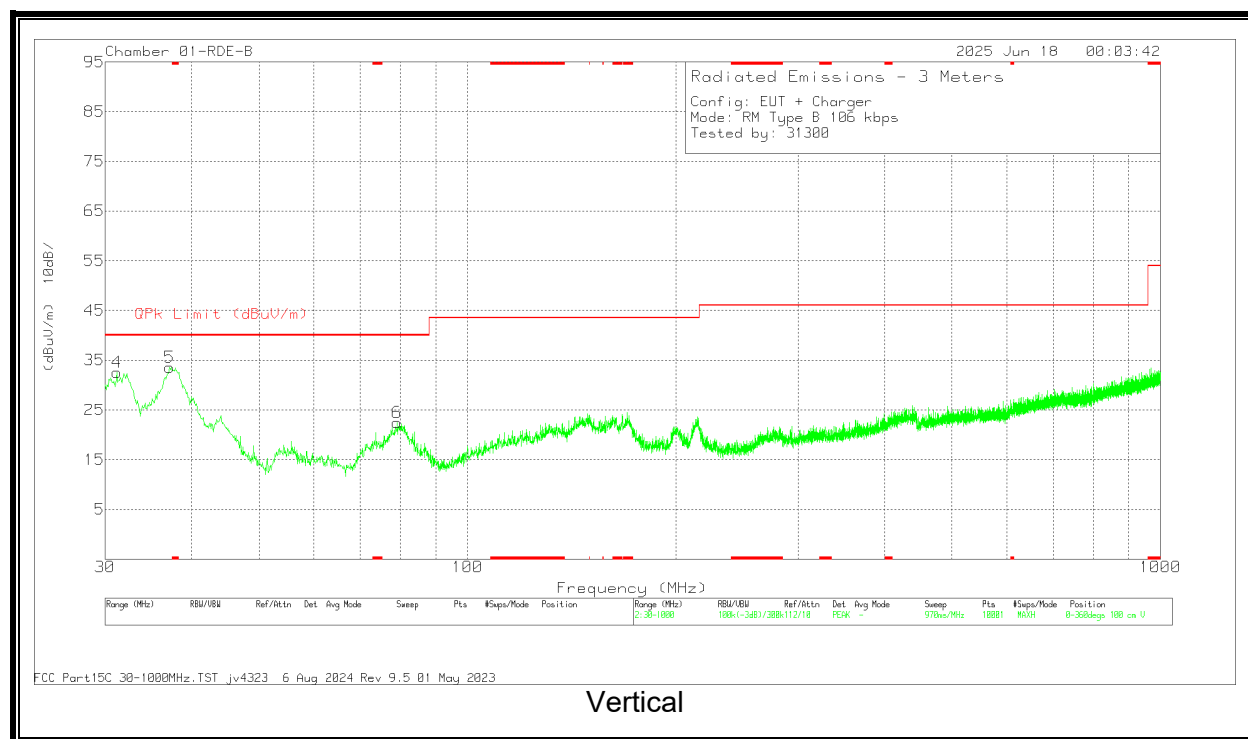
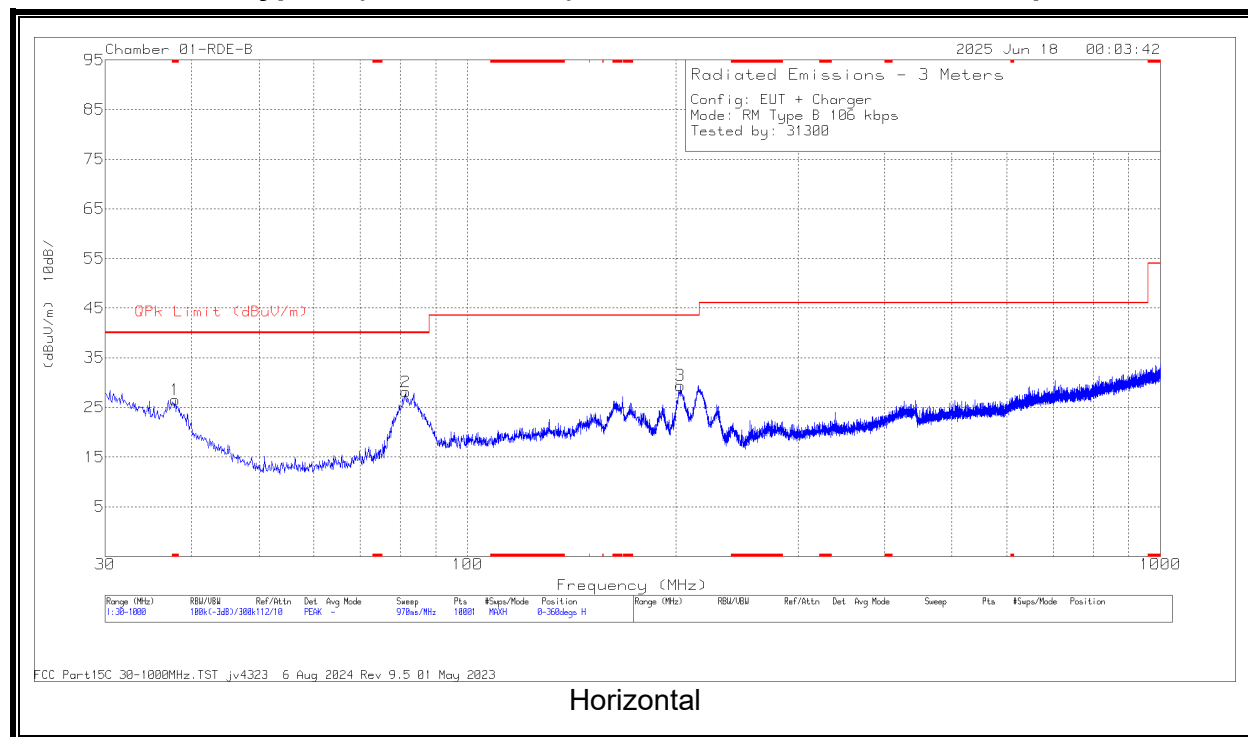
DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E (dB/m)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Polarity
1	.0118	16.53	Pk	60.3	-31.4	-80	-34.57	66.12	-100.69	46.12	-80.69	0-360	Face-On
2	.0121	16.46	Pk	60.2	-31.4	-80	-34.74	65.93	-100.67	45.93	-80.67	0-360	Face-Off
3	.0155	12.44	Pk	59.8	-31.7	-80	-39.46	63.79	-103.25	43.79	-83.25	0-360	Face-On
4	.0153	16.16	Pk	59.8	-31.7	-80	-35.74	63.88	-99.62	43.88	-79.62	0-360	Face-Off
5	.0234	9.34	Pk	58.8	-32.2	-80	-44.06	60.18	-104.24	40.18	-84.24	0-360	Face-On
6	.0234	12.67	Pk	58.8	-32.2	-80	-40.73	60.21	-100.94	40.21	-80.94	0-360	Face-Off
7	.0254	9.79	Pk	58.6	-32.1	-80	-43.71	59.48	-103.19	39.48	-83.19	0-360	Face-On
8	.0255	14.62	Pk	58.6	-32.1	-80	-38.88	59.46	-98.34	39.46	-78.34	0-360	Face-Off
9	.0289	17.48	Pk	58.2	-32.1	-80	-36.42	58.37	-94.79	38.37	-74.79	0-360	Face-On
10	.0289	8.09	Pk	58.2	-32.1	-80	-45.81	58.36	-104.17	38.36	-84.17	0-360	Face-Off

Pk - Peak detector

9.5. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER

9.5.1. Type B (Reader Mode), SPURIOUS EMISSION 106Kbps



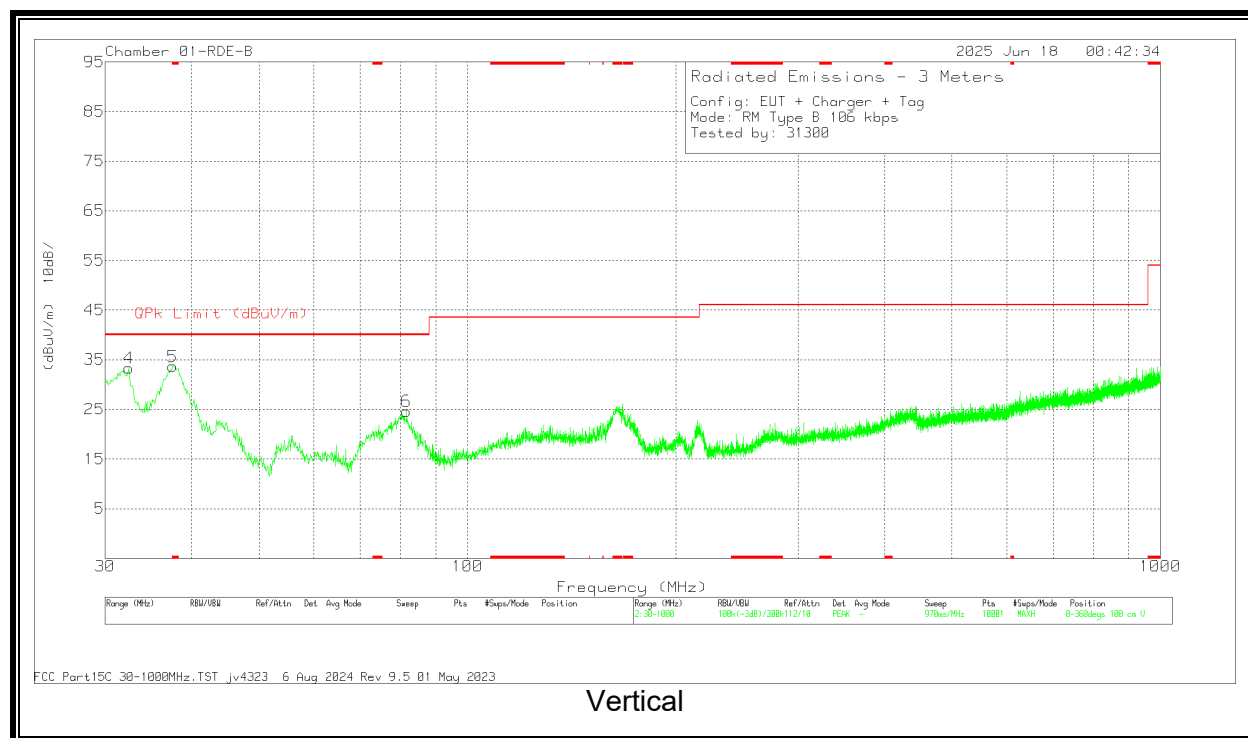
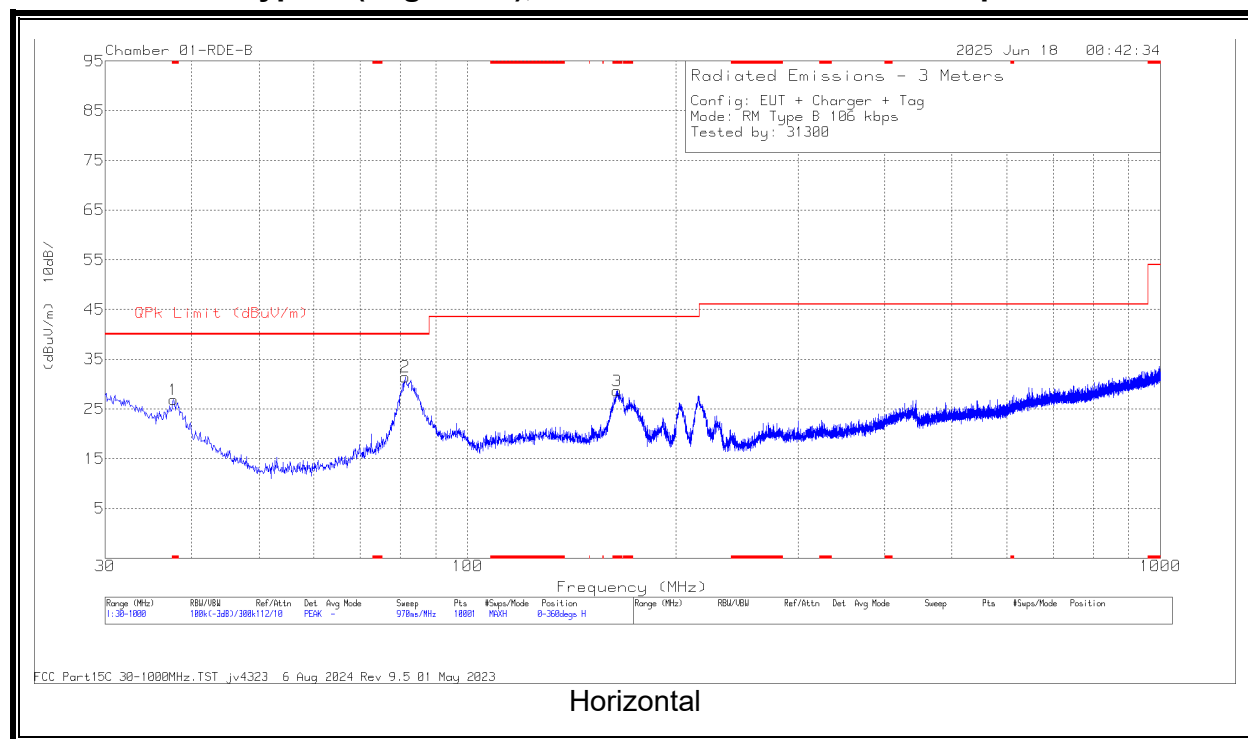
DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 37.857	35.78	Pk	22.1	-31.4	26.48	40	-13.52	0-360	199	H
4	31.164	37.72	Pk	26.4	-31.5	32.62	40	-7.38	0-360	100	V
5	37.178	42.39	Pk	22.6	-31.4	33.59	40	-6.41	0-360	100	V
	* 37.8637	39.51	Qp	22.1	-31.4	30.21	40	-9.79	110	103	V
6	79.179	39.95	Pk	13.5	-31	22.45	40	-17.55	0-360	100	V
2	81.41	45.6	Pk	13.4	-30.9	28.1	40	-11.9	0-360	199	H
3	202.854	41.84	Pk	17.7	-30.1	29.44	43.52	-14.08	0-360	98	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

9.5.2. Type B (Tag Mode), SPURIOUS EMISSION 106Kbps

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 37.663	36.03	Pk	22.2	-31.4	26.83	40	-13.17	0-360	299	H
3	* 164.442	41	Pk	17.9	-30.3	28.6	43.52	-14.92	0-360	199	H
5	* 37.566	42.74	Pk	22.3	-31.4	33.64	40	-6.36	0-360	100	V
	* 38.006	39.23	Qp	22	-31.4	29.83	40	-10.17	133	104	V
4	32.425	39.2	Pk	25.6	-31.5	33.3	40	-6.7	0-360	100	V
	32.1014	33.47	Qp	25.8	-31.5	27.77	40	-12.23	51	124	V
2	81.313	48.91	Pk	13.4	-30.9	31.41	40	-8.59	0-360	199	H
6	81.701	42.22	Pk	13.3	-30.9	24.62	40	-15.38	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

IC RSS-210, Annex B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

TEST PROCEDURE

ANSI C63.10-2020 Clause 6.8

RESULTS

No non-compliance noted.

ID:	31300 RS	Date:	2025-07-01 to 2025-07-07
------------	----------	--------------	--------------------------

10.1. PRIMARY ANTENNA

READER MODE, TYPE B 106 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.356 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.55991868	1.928	13.55992809	1.234	13.55994295	0.139	13.55999973	-4.048	± 100
	40	13.55994057	0.315	13.55996022	-1.135	13.55996256	-1.307	13.55995985	-1.108	± 100
	30	13.55992159	1.714	13.55992686	1.325	13.55992651	1.351	13.55992486	1.473	± 100
	20	13.55994483	0.000	13.55993631	0.629	13.55993205	0.943	13.55992962	1.122	± 100
	10	13.55996562	-1.533	13.55994159	0.239	13.55994146	0.249	13.55994368	0.085	± 100
	0	13.56000265	-4.264	13.55997787	-2.436	13.5599784	-2.475	13.55997931	-2.543	± 100
	-10	13.56003729	-6.819	13.56001419	-5.115	13.5600131	-5.035	13.56001645	-5.281	± 100
	-20	13.56006233	-8.665	13.56004897	-7.680	13.56004828	-7.629	13.5600514	-7.859	± 100
3.23	20	13.55994701	-0.161	13.55992687	1.324	13.55992356	1.569	13.55992176	1.701	± 100
4.37	20	13.55994162	0.237	13.55992611	1.380	13.5599251	1.455	13.55992418	1.523	± 100

CE MODE, TYPE B 106 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.356 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.56090974	-27.031	13.56016026	28.240	13.56034271	14.786	13.56044374	7.335	± 100
	40	13.56033593	15.286	13.56012149	31.100	13.56029701	18.156	13.5601399	29.742	± 100
	30	13.56028902	18.745	13.56041082	9.763	13.56010148	32.576	13.56055134	-0.600	± 100
	20	13.56054321	0.000	13.5602956	18.260	13.5604747	5.052	13.56003299	37.627	± 100
	10	13.56013535	30.078	13.5602697	20.170	13.56015762	28.435	13.56025597	21.183	± 100
	0	13.56040737	10.017	13.56017541	27.123	13.56076662	-16.476	13.56061424	-5.239	± 100
	-10	13.56018064	26.738	13.56019723	25.515	13.56099297	-33.168	13.56044026	7.592	± 100
	-20	13.56030735	17.394	13.56066402	-8.909	13.56018279	26.579	13.56073011	-13.783	± 100
3.23	20	13.56019582	25.618	13.56013704	29.953	13.56044605	7.165	13.56052474	1.362	± 100
4.37	20	13.56040927	9.877	13.56027501	19.778	13.56036753	12.956	13.56009375	33.145	± 100

TAG MODE, TYPE B 106 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.356 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.55993395	6.332	13.55991625	7.637	13.55991358	7.835	13.55991344	7.845	± 100
	40	13.55992961	6.652	13.55992317	7.128	13.55992206	7.209	13.55991856	7.468	± 100
	30	13.55997685	3.169	13.55994341	5.635	13.55993861	5.988	13.55993188	6.485	± 100
	20	13.56001982	0.000	13.559993	1.978	13.55997419	3.364	13.55996542	4.011	± 100
	10	13.56004366	-1.758	13.56002216	-0.173	13.55999845	1.576	13.55999053	2.160	± 100
	0	13.56004776	-2.061	13.56003809	-1.347	13.56003139	-0.853	13.56002621	-0.472	± 100
	-10	13.56008013	-4.448	13.56006146	-3.071	13.56005378	-2.505	13.56004797	-2.076	± 100
	-20	13.56008192	-4.580	13.56007159	-3.818	13.56006925	-3.646	13.56006673	-3.460	± 100
3.23	20	13.5599741	3.372	13.5599509	5.083	13.55994862	5.250	13.5599469	5.377	± 100
4.37	20	13.55997612	3.222	13.55995974	4.430	13.55995785	4.570	13.55995544	4.748	± 100

10.2. SECONDARY ANTENNA

READER MODE, TYPE B 106 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.356 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.559935549	3.092	13.559935883	3.067	13.559937229	2.968	13.559938666	2.862	± 100
	40	13.559940537	2.724	13.559939209	2.822	13.559937962	2.914	13.559936666	3.010	± 100
	30	13.559957858	1.447	13.559956444	1.551	13.559955056	1.653	13.559953438	1.773	± 100
	20	13.559977476	0.000	13.559977660	-0.014	13.559977861	-0.028	13.559978105	-0.046	± 100
	10	13.559988108	-0.784	13.559990844	-0.986	13.559993935	-1.214	13.559997781	-1.497	± 100
	0	13.560008937	-2.320	13.560015583	-2.810	13.560021946	-3.279	13.560026027	-3.580	± 100
	-10	13.560050734	-5.403	13.560051265	-5.442	13.560051309	-5.445	13.560051444	-5.455	± 100
	-20	13.560067224	-6.619	13.560067566	-6.644	13.560067715	-6.655	13.560067898	-6.668	± 100
3.23	20	13.560030546	-3.914	13.560029882	-3.865	13.560029407	-3.830	13.560028845	-3.788	± 100
4.37	20	13.560023097	-3.364	13.560009767	-2.381	13.560009410	-2.355	13.560009218	-2.341	± 100

TAG MODE, TYPE B 106 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.356 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.559936485	2.333	13.559935911	2.375	13.559936391	2.340	13.559936156	2.357	± 100
	40	13.559945742	1.650	13.559945701	1.653	13.559945499	1.668	13.559945443	1.672	± 100
	30	13.559968885	-0.056	13.559968607	-0.036	13.559976310	-0.604	13.559968199	-0.006	± 100
	20	13.559968122	0.000	13.559968281	-0.012	13.559968344	-0.016	13.559968569	-0.033	± 100
	10	13.559964076	0.298	13.559965236	0.213	13.559965489	0.194	13.559965753	0.175	± 100
	0	13.559996788	-2.114	13.559997036	-2.132	13.559997406	-2.160	13.559997901	-2.196	± 100
	-10	13.560039548	-5.267	13.560040145	-5.311	13.560040103	-5.308	13.560040243	-5.319	± 100
	-20	13.560065229	-7.161	13.560069282	-7.460	13.560072940	-7.730	13.560076172	-7.968	± 100
3.23	20	13.559968930	-0.060	13.559969113	-0.073	13.559969051	-0.069	13.559969155	-0.076	± 100
4.37	20	13.559996580	-2.099	13.559995607	-2.027	13.559995298	-2.004	13.559995239	-2.000	± 100

11. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

IC RSS-GEN, Section 8.8

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

ANSI C63.10:2020

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

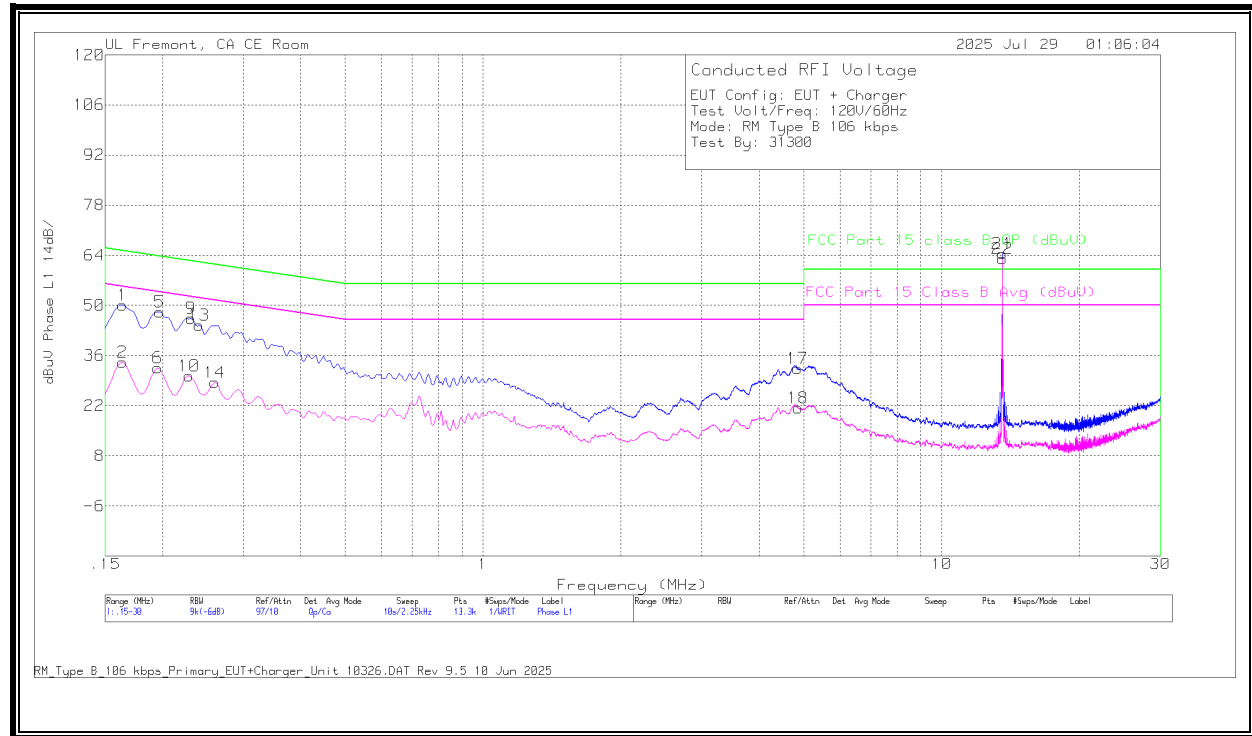
RESULTS

11.1. PRIMARY ANTENNA

11.1.1. READER MODE: Type B, 106 Kbps

NORMAL OPERATION with charger and not terminated, 106Kbps

LINE 1 RESULTS

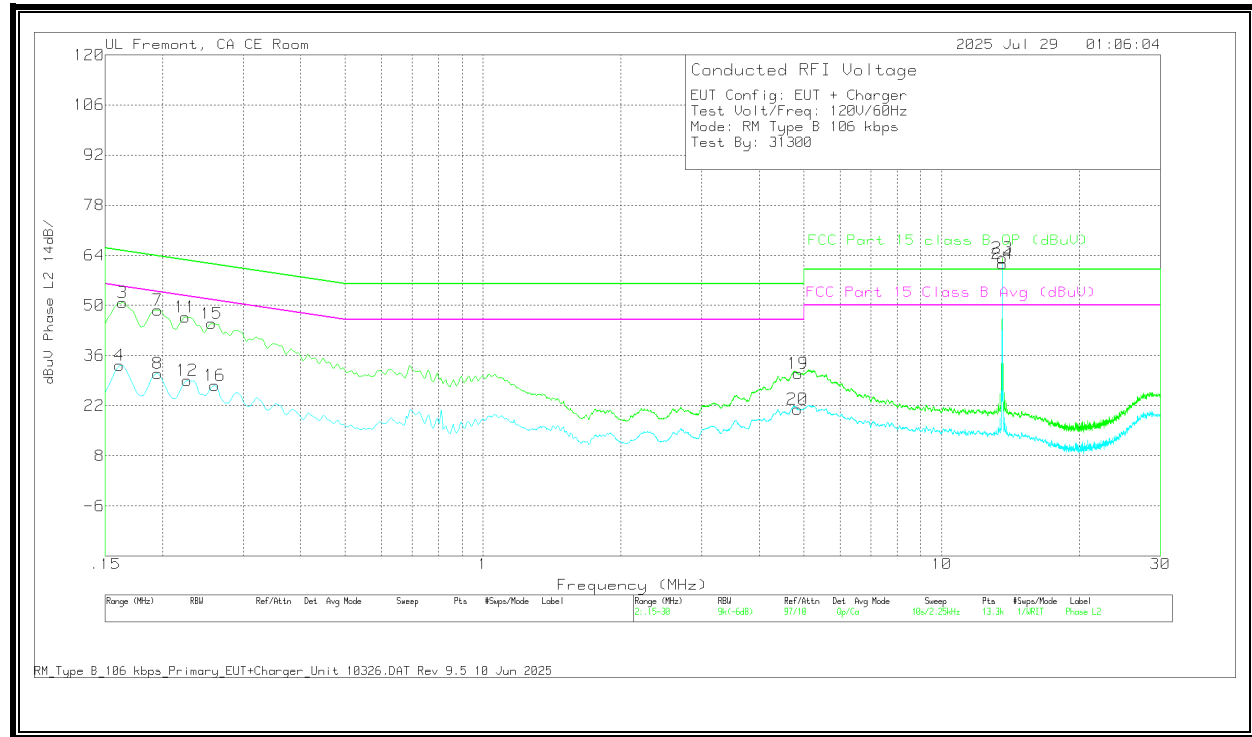


DATA

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1635	15.08	Ca	.4	.1	8.5	10	34.08	55.28	-21.2	-	-
6	.195	13.94	Ca	.1	.1	8.4	10	32.54	53.82	-21.28	-	-
10	.2288	11.96	Ca	0	0	8.3	10	30.26	52.49	-22.23	-	-
14	.2603	10.36	Ca	-.1	0	8.2	10	28.46	51.42	-22.96	-	-
18	4.8593	3.39	Ca	-.1	0	8.1	10	21.39	46	-24.61	-	-
22	*13.56	44.5	Ca	.2	.1	8.2	10	63	50	13	-	-
1	.1635	31.16	Qp	.4	.1	8.5	10	50.16	-	-	65.28	-15.12
5	.1973	29.58	Qp	.1	.1	8.4	10	48.18	-	-	63.73	-15.55
9	.231	28.06	Qp	0	0	8.3	10	46.36	-	-	62.41	-16.05
13	.24	26.43	Qp	-.1	0	8.2	10	44.53	-	-	62.1	-17.57
17	4.8548	14.35	Qp	-.2	0	8.2	10	32.35	-	-	56	-23.65
21	*13.56	45.92	Qp	.2	.1	8.2	10	64.42	-	-	60	4.42

Qp - Quasi-Peak detector
 Ca - CISPR average detection
 * Fundamental

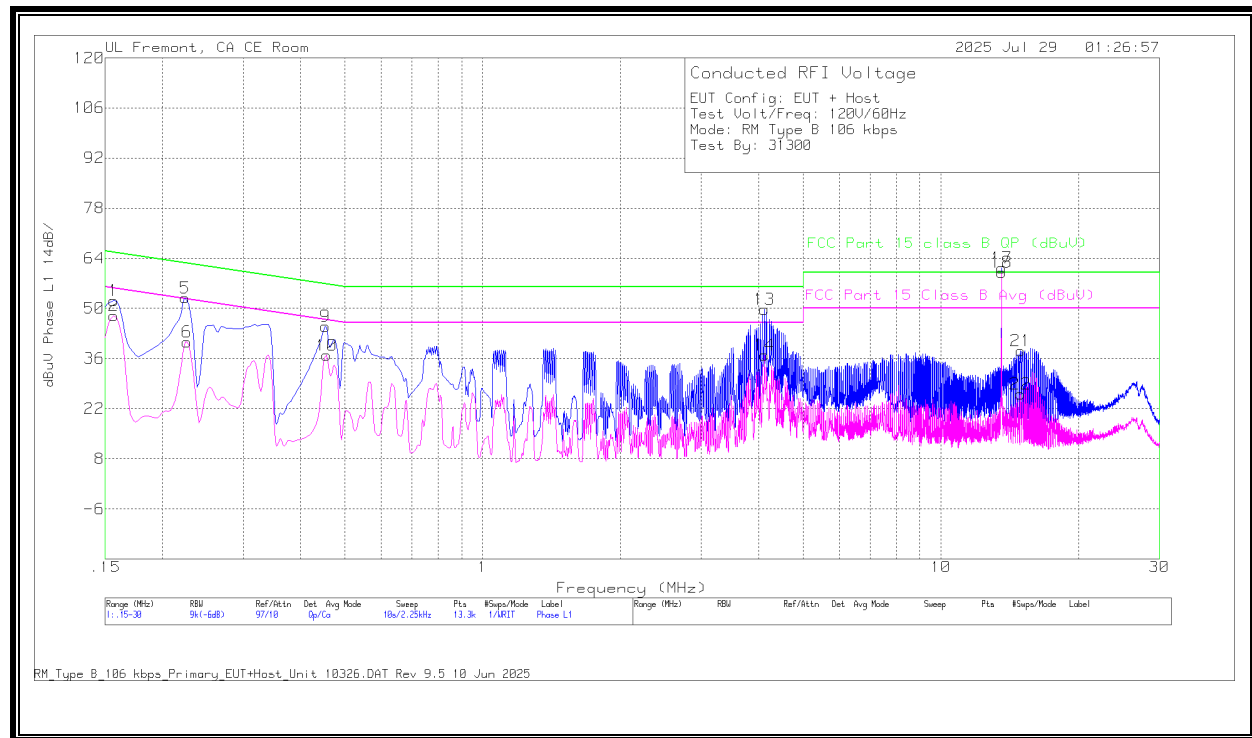
Note: 13.56MHz is a fundamental frequency of the EUT. Data under the following section 11.1.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1613	14.21	Ca	.4	.1	8.5	10	33.21	55.4	-22.19	-	-
8	.195	12.47	Ca	.1	0	8.4	10	30.97	53.82	-22.85	-	-
12	.2265	10.69	Ca	0	0	8.3	10	28.99	52.58	-23.59	-	-
16	.2603	9.58	Ca	-.1	0	8.2	10	27.68	51.42	-23.74	-	-
20	4.8525	3	Ca	-.2	0	8.2	10	21	46	-25	-	-
24	*13.56	43.08	Ca	.2	.1	8.2	10	61.58	50	11.58	-	-
3	.1635	31.75	Qp	.4	.1	8.5	10	50.75	-	-	65.28	-14.53
7	.195	30.21	Qp	.1	0	8.4	10	48.71	-	-	63.82	-15.11
11	.2243	28.43	Qp	0	0	8.3	10	46.73	-	-	62.66	-15.93
15	.2558	26.83	Qp	-.1	0	8.2	10	44.93	-	-	61.57	-16.64
19	4.8593	13	Qp	-.1	0	8.1	10	31	-	-	56	-25
23	*13.56	44.67	Qp	.2	.1	8.2	10	63.17	-	-	60	3.17

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

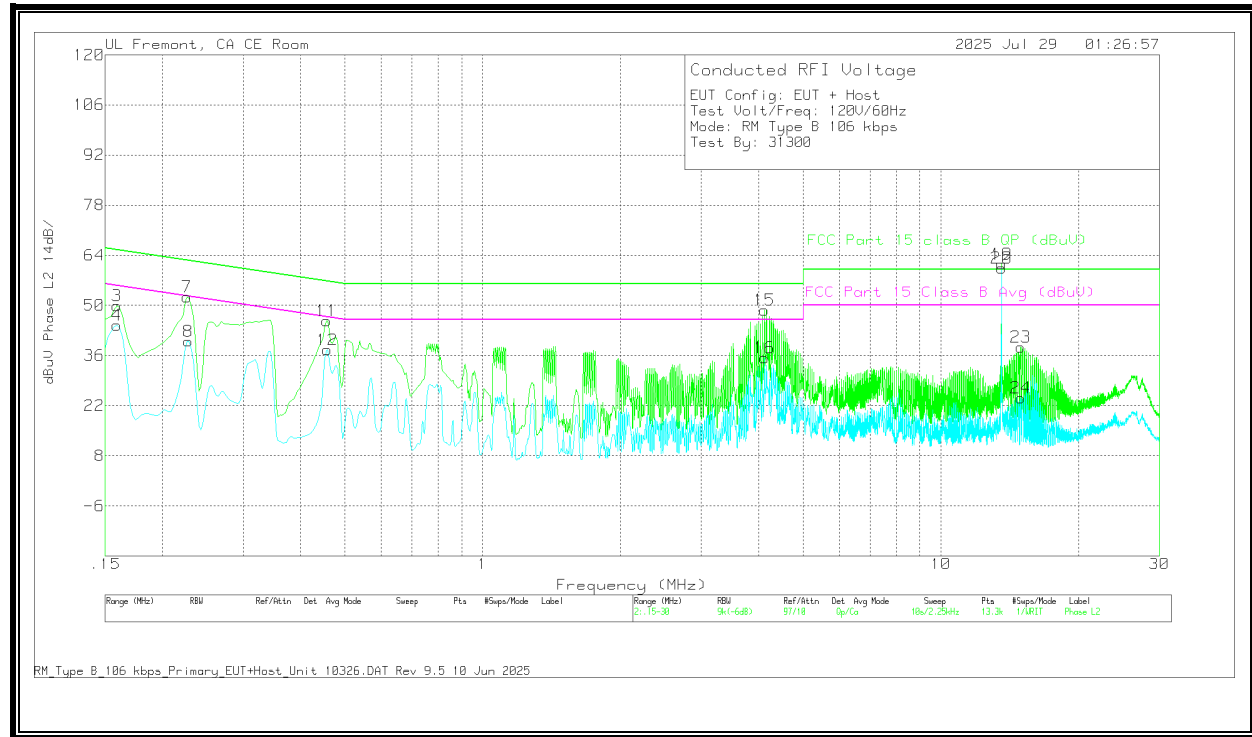
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

NORMAL OPERATION with Host and not terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1568	28.96	Ca	.4	.1	8.5	10	47.96	55.63	-7.67	-	-
6	.2265	22.32	Ca	0	0	8.3	10	40.62	52.58	-11.96	-	-
10	.456	17.86	Ca	.2	0	8.8	10	36.86	46.77	-9.91	-	-
14	4.1213	18.49	Ca	.2	0	8.3	10	36.99	46	-9.01	-	-
18	*13.56	41.63	Ca	.2	.1	8.2	10	60.13	50	10.13	-	-
22	14.8965	7.73	Ca	.1	.1	8.2	10	26.13	50	-23.87	-	-
1	.1568	33.25	Qp	.4	.1	8.5	10	52.25	-	-	65.63	-13.38
5	.2243	34.67	Qp	0	0	8.3	10	52.97	-	-	62.66	-9.69
9	.4538	26.04	Qp	.2	0	8.8	10	45.04	-	-	56.81	-11.77
13	4.119	31.2	Qp	.2	0	8.3	10	49.7	-	-	56	-6.3
17	*13.56	42.77	Qp	.2	.1	8.2	10	61.27	-	-	60	1.27
21	14.9393	18.91	Qp	.5	.1	8.7	10	38.21	-	-	60	-21.79

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.159	25.45	Ca	.4	.1	8.5	10	44.45	55.52	-11.07	-	-
8	.2276	21.7	Ca	0	0	8.3	10	40	52.54	-12.54	-	-
12	.4583	18.67	Ca	.2	0	8.7	10	37.57	46.72	-9.15	-	-
16	4.1213	16.86	Ca	.2	0	8.3	10	35.36	46	-10.64	-	-
20	*13.56	41.93	Ca	.2	.1	8.2	10	60.43	50	10.43	-	-
24	14.9393	4.86	Ca	.5	.1	8.7	10	24.16	50	-25.84	-	-
3	.159	30.92	Qp	.4	.1	8.5	10	49.92	-	-	65.52	-15.6
7	.2265	34.09	Qp	0	0	8.3	10	52.39	-	-	62.58	-10.19
11	.456	26.75	Qp	.2	0	8.8	10	45.75	-	-	56.77	-11.02
15	4.1213	30.21	Qp	.2	0	8.3	10	48.71	-	-	56	-7.29
19	*13.56	43.06	Qp	.2	.1	8.2	10	61.56	-	-	60	1.56
23	14.9393	19.04	Qp	.5	.1	8.7	10	38.34	-	-	60	-21.66

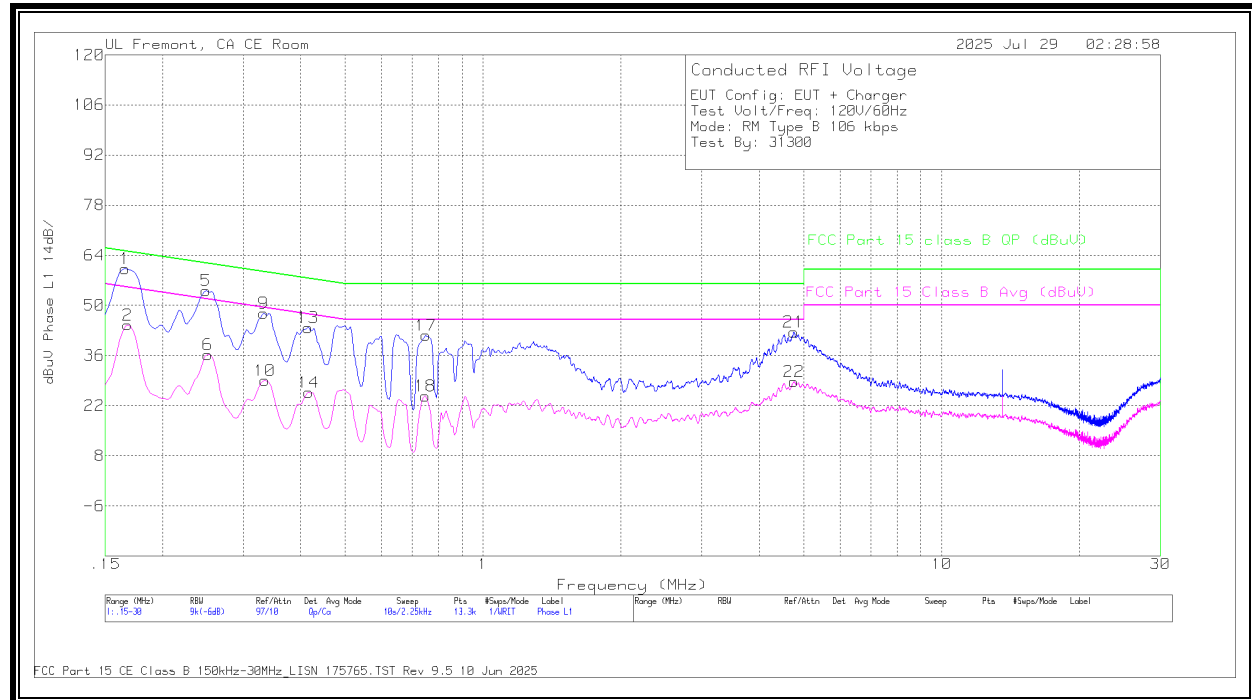
Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line

11.1.2. READER MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED)

NORMAL OPERATION with charger and terminated, 106Kbps

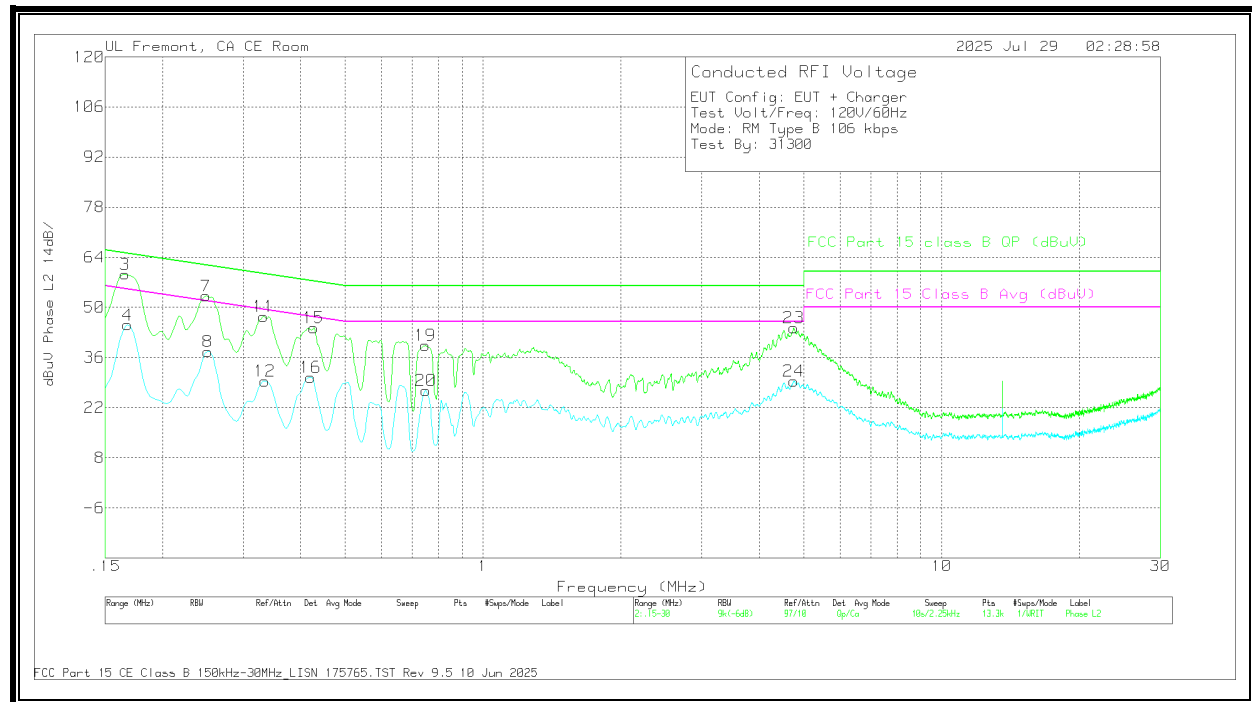
LINE 1 RESULTS



DATA

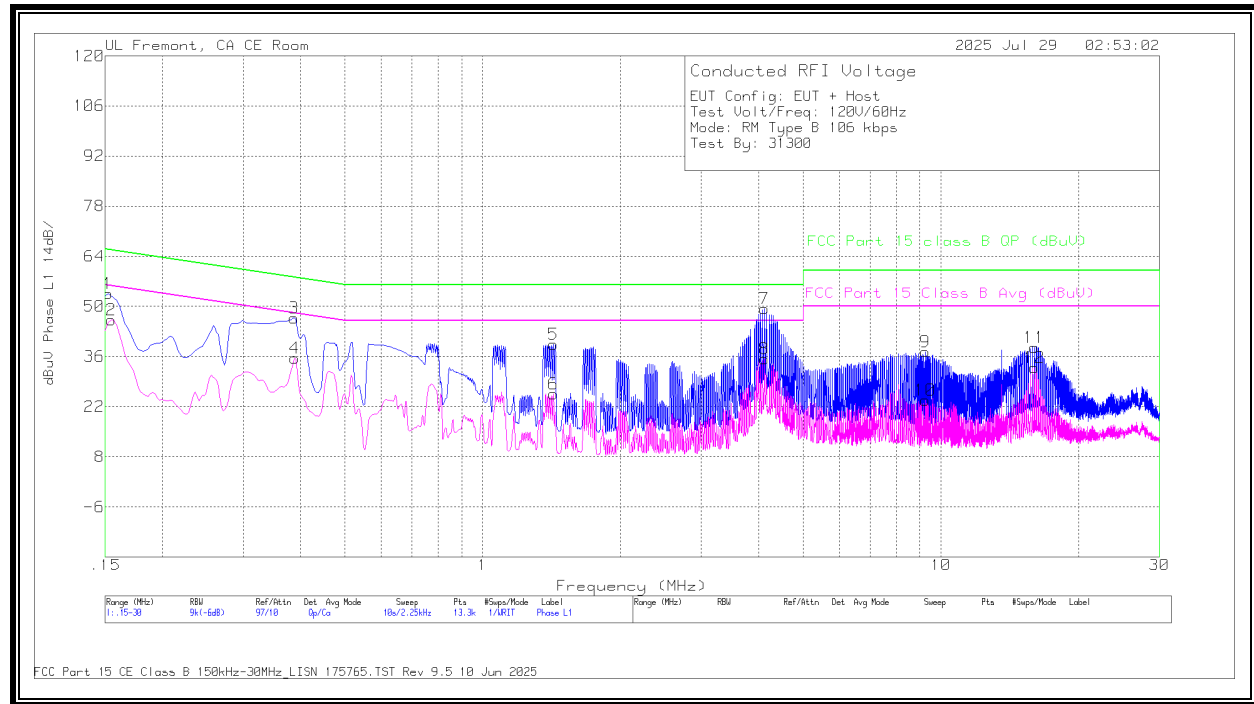
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.168	25.56	Ca	.4	.1	8.5	10	44.56	55.06	-10.5	-	-
6	.2513	18.15	Ca	-.1	0	8.2	10	36.25	51.72	-15.47	-	-
10	.3345	10.98	Ca	-.3	0	8.3	10	28.98	49.34	-20.36	-	-
14	.4166	7.45	Ca	-.3	0	8.5	10	25.65	47.52	-21.87	-	-
18	.7474	5.94	Ca	.1	0	8.6	10	24.64	46	-21.36	-	-
22	4.767	10.07	Ca	.2	0	8.5	10	28.77	46	-17.23	-	-
1	.1658	41.23	Qp	.4	.1	8.5	10	60.23	-	-	65.17	-4.94
5	.249	36.02	Qp	-.1	0	8.2	10	54.12	-	-	61.79	-7.67
9	.3323	29.8	Qp	-.3	0	8.3	10	47.8	-	-	59.39	-11.59
13	.4155	25.6	Qp	-.3	0	8.5	10	43.8	-	-	57.54	-13.74
17	.7508	22.89	Qp	.1	0	8.6	10	41.59	-	-	56	-14.41
21	4.7603	23.87	Qp	.2	0	8.5	10	42.57	-	-	56	-13.43

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

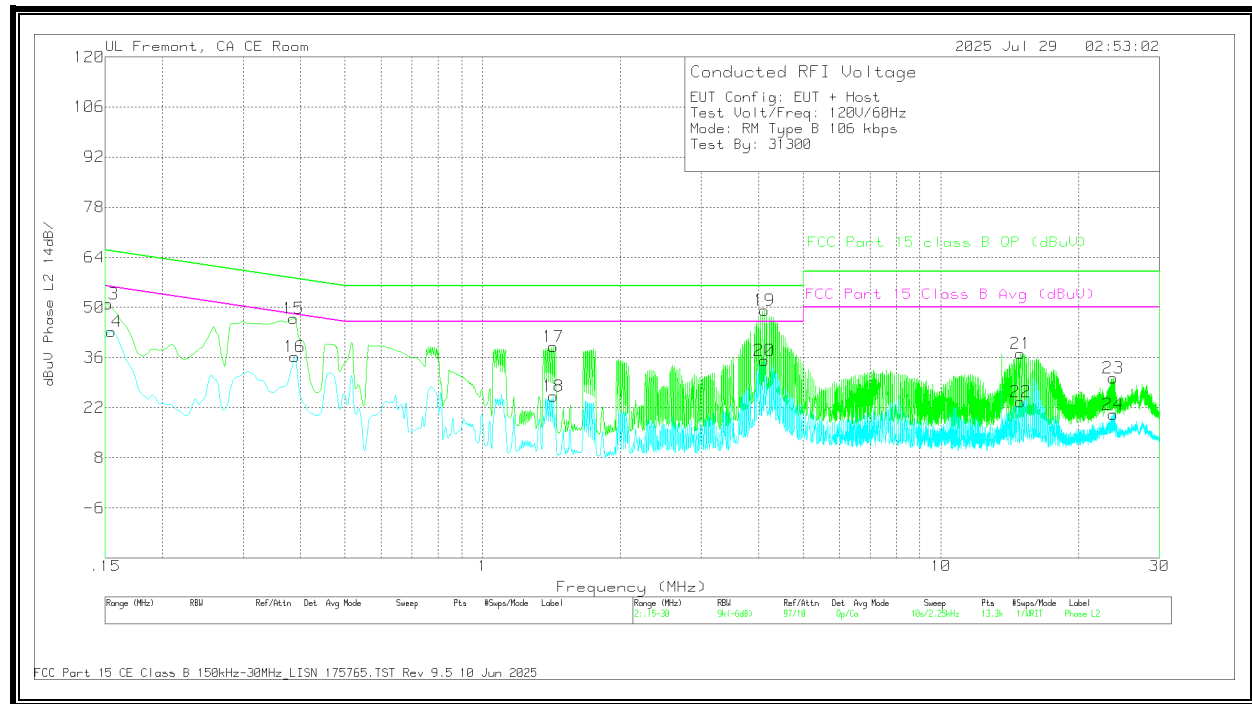
Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.168	26.09	Ca	.4	.1	8.5	10	45.09	55.06	-9.97	-	-
8	.2513	19.6	Ca	-.1	0	8.2	10	37.7	51.72	-14.02	-	-
12	.3345	11.37	Ca	-.3	0	8.3	10	29.37	49.34	-19.97	-	-
16	.4211	12.07	Ca	-.2	0	8.6	10	30.47	47.43	-16.96	-	-
20	.7508	8.01	Ca	.1	0	8.6	10	26.71	46	-19.29	-	-
24	4.7648	10.7	Ca	.2	0	8.5	10	29.4	46	-16.6	-	-
3	.1658	40.28	Qp	.4	.1	8.5	10	59.28	-	-	65.17	-5.89
7	.249	35.07	Qp	-.1	0	8.2	10	53.17	-	-	61.79	-8.62
11	.3323	29.44	Qp	-.3	0	8.3	10	47.44	-	-	59.39	-11.95
15	.4268	25.83	Qp	-.1	0	8.6	10	44.33	-	-	57.32	-12.99
19	.7485	20.63	Qp	.1	0	8.6	10	39.33	-	-	56	-16.67
23	4.7614	25.6	Qp	.2	0	8.5	10	44.3	-	-	56	-11.7

Qp - Quasi-Peak detector
 Ca - CISPR average detection

NORMAL OPERATION with Host and terminated, 106Kbps**LINE 1 RESULTS****DATA**

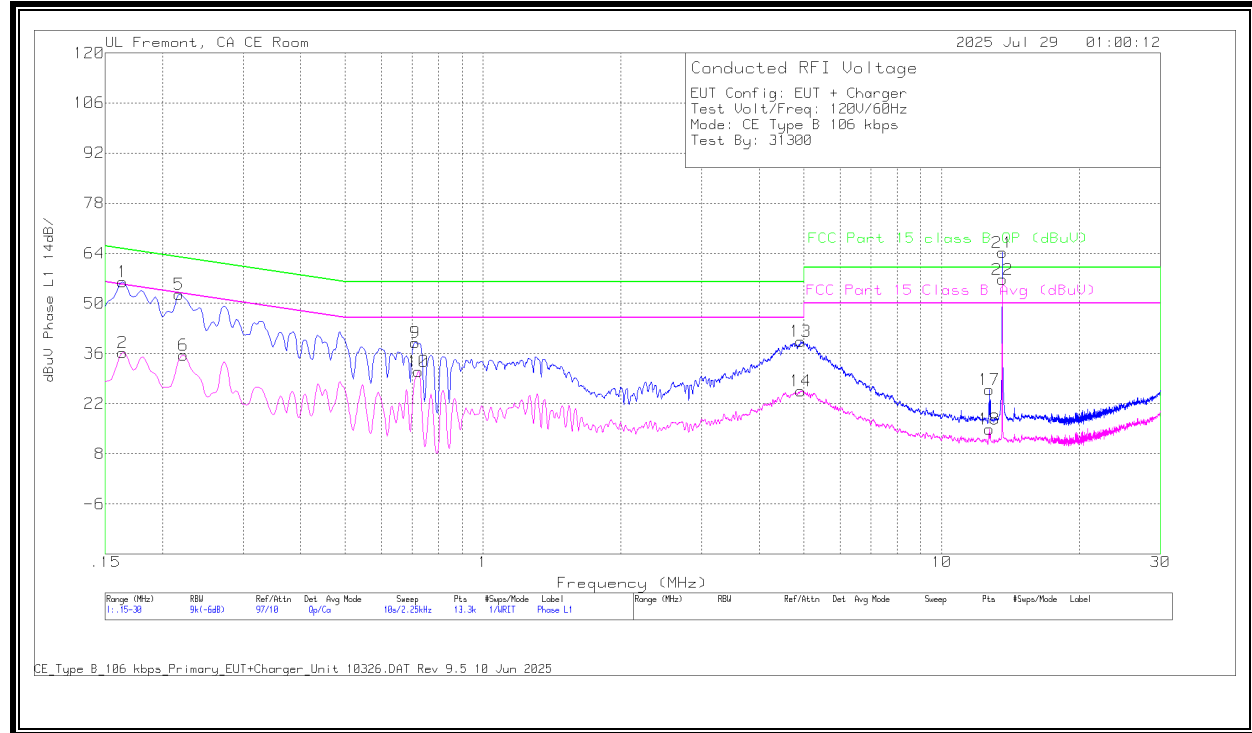
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	27.07	Ca	.5	.1	8.5	10	46.17	55.75	-9.58	-	-
4	.3885	17.8	Ca	-.5	0	8.3	10	35.6	48.1	-12.5	-	-
6	1.4258	7.03	Ca	.1	0	8.4	10	25.53	46	-20.47	-	-
8	4.119	16.88	Ca	.2	0	8.3	10	35.38	46	-10.62	-	-
10	9.2558	4.32	Ca	.5	0	9	10	23.82	50	-26.18	-	-
12	16.0058	14.71	Ca	.1	.1	8	10	32.91	50	-17.09	-	-
1	.1523	34.47	Qp	.5	.1	8.5	10	53.57	-	-	65.88	-12.31
3	.3874	28.94	Qp	-.5	0	8.3	10	46.74	-	-	58.12	-11.38
5	1.4258	20.91	Qp	.1	0	8.4	10	39.41	-	-	56	-16.59
7	4.119	30.89	Qp	.2	0	8.3	10	49.39	-	-	56	-6.61
9	9.2558	17.87	Qp	.5	0	9	10	37.37	-	-	60	-22.63
11	16.0035	20.58	Qp	0	.1	7.9	10	38.58	-	-	60	-21.42

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1545	24.21	Ca	.5	.1	8.5	10	43.31	55.75	-12.44	-	-
16	.3885	18.49	Ca	-.5	0	8.3	10	36.29	48.1	-11.81	-	-
18	1.4258	6.65	Ca	.1	0	8.4	10	25.15	46	-20.85	-	-
20	4.119	16.71	Ca	.2	0	8.3	10	35.21	46	-10.79	-	-
22	14.937	4.39	Ca	.5	.1	8.7	10	23.69	50	-26.31	-	-
24	23.7728	.91	Ca	.4	.2	8.6	10	20.11	50	-29.89	-	-
13	.1523	31.85	Qp	.5	.1	8.5	10	50.95	-	-	65.88	-14.93
15	.3863	29.11	Qp	-.5	0	8.3	10	46.91	-	-	58.14	-11.23
17	1.4258	20.6	Qp	.1	0	8.4	10	39.1	-	-	56	-16.9
19	4.119	30.68	Qp	.2	0	8.3	10	49.18	-	-	56	-6.82
21	14.937	17.88	Qp	.5	.1	8.7	10	37.18	-	-	60	-22.82
23	23.7728	11.14	Qp	.4	.2	8.6	10	30.34	-	-	60	-29.66

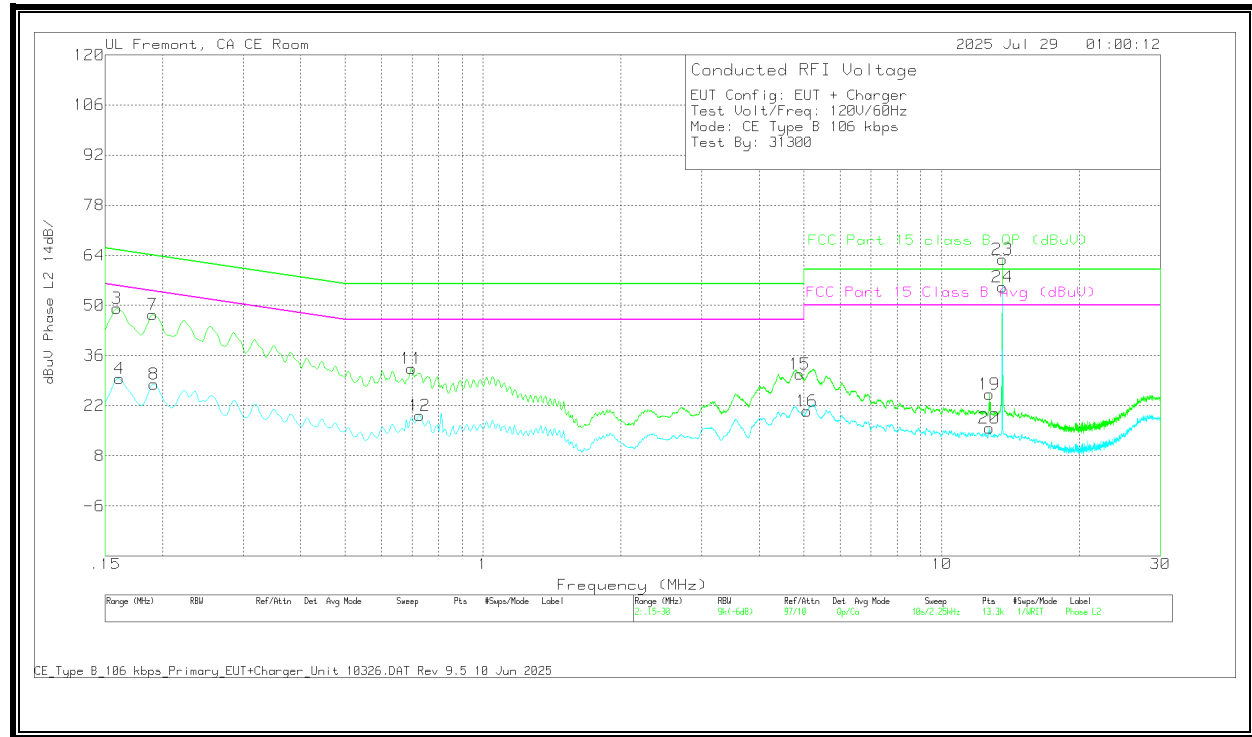
Qp - Quasi-Peak detector
Ca - CISPR average detection

11.1.3. CE MODE: Type B, 106 Kbps**NORMAL OPERATION with charger and not terminated 106Kbps****LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1635	17.31	Ca	.4	.1	8.5	10	36.31	55.28	-18.97	-	-
6	.222	17.22	Ca	0	0	8.3	10	35.52	52.74	-17.22	-	-
10	.7238	12.42	Ca	.2	0	8.4	10	31.02	46	-14.98	-	-
14	4.9279	7.32	Ca	.2	0	8.1	10	25.62	46	-20.38	-	-
18	12.714	-3.53	Ca	.3	.1	8	10	14.87	50	-35.13	-	-
22	*13.56	38.16	Ca	.2	.1	8.2	10	56.66	50	6.66	-	-
1	.1635	37.06	Qp	.4	.1	8.5	10	56.06	-	-	65.28	-9.22
5	.2175	34.25	Qp	0	0	8.3	10	52.55	-	-	62.91	-10.36
9	.7125	20.59	Qp	.2	0	8.3	10	39.09	-	-	56	-16.91
13	4.9335	20.94	Qp	.2	0	8.2	10	39.34	-	-	56	-16.66
17	12.7118	7.46	Qp	.4	.1	8	10	25.96	-	-	60	-34.04
21	*13.56	45.7	Qp	.2	.1	8.2	10	64.2	-	-	60	4.2

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

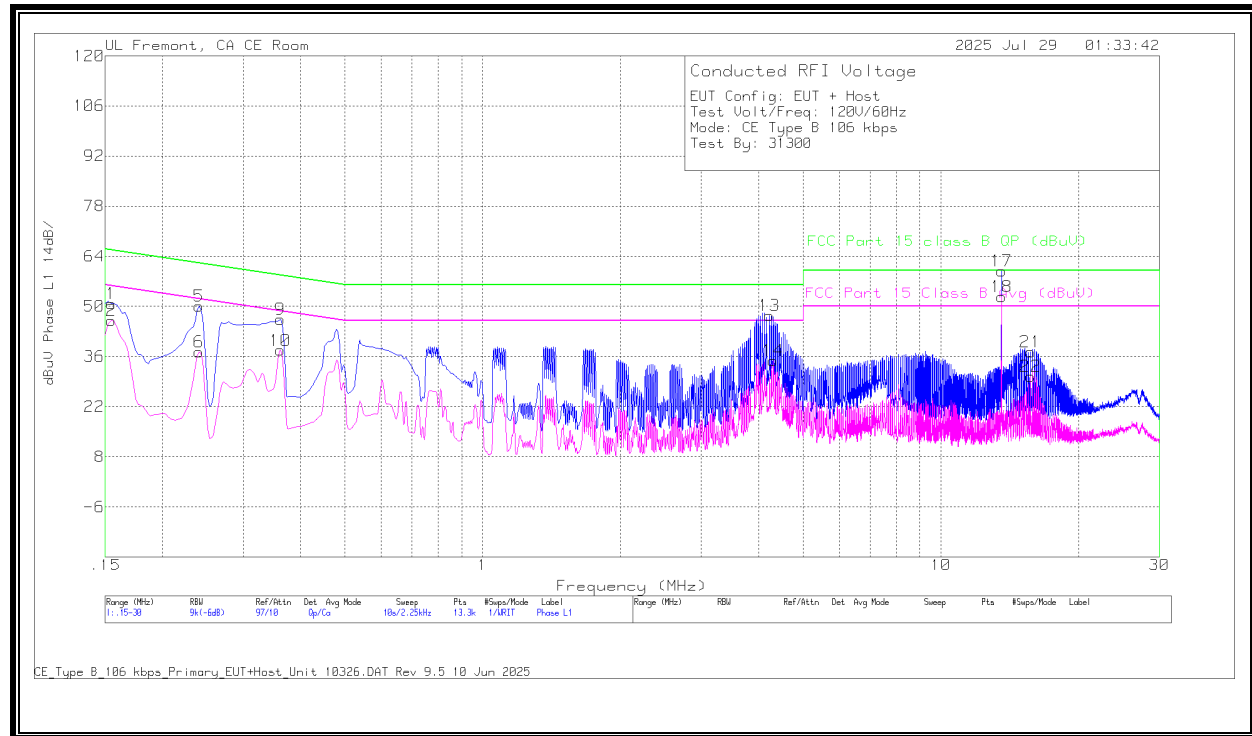
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1613	10.64	Ca	.4	.1	8.5	10	29.64	55.4	-25.76	-	-
8	.1916	9.46	Ca	.2	0	8.4	10	28.06	53.97	-25.91	-	-
12	.7283	.76	Ca	.1	0	8.4	10	19.26	46	-26.74	-	-
16	5.0843	1.94	Ca	.2	0	8.4	10	20.54	50	-29.46	-	-
20	12.714	-2.7	Ca	.3	.1	8	10	15.7	50	-34.3	-	-
24	*13.56	36.73	Ca	.2	.1	8.2	10	55.23	50	5.23	-	-
3	.159	30.16	Qp	.4	.1	8.5	10	49.16	-	-	65.52	-16.36
7	.1905	28.9	Qp	.2	0	8.4	10	47.5	-	-	64.01	-16.51
11	.699	14.01	Qp	.2	0	8.2	10	32.41	-	-	56	-23.59
15	4.9043	12.78	Qp	.2	0	7.9	10	30.88	-	-	56	-25.12
19	12.7118	6.65	Qp	.4	.1	8	10	25.15	-	-	60	-34.85
23	*13.56	44.43	Qp	.2	.1	8.2	10	62.93	-	-	60	2.93

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

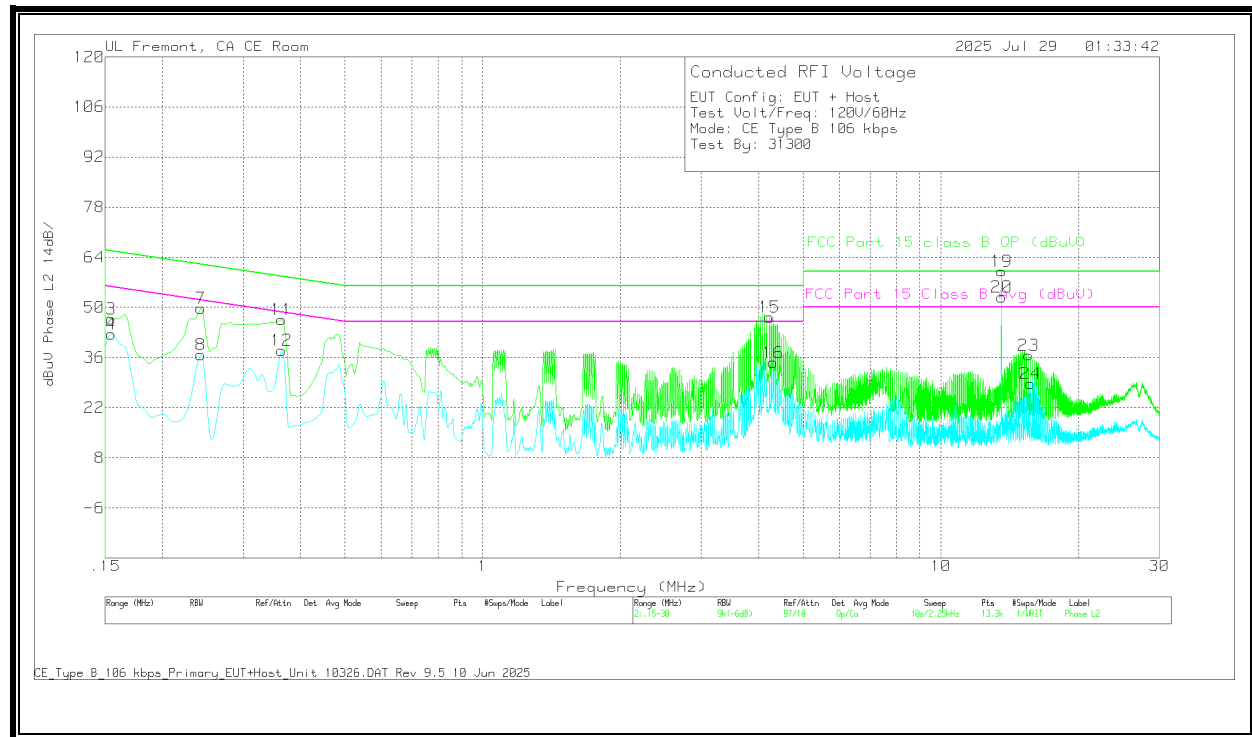
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

NORMAL OPERATION with Host and not terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	27.02	Ca	.5	.1	8.5	10	46.12	55.75	-9.63	-	-
6	.24	19.19	Ca	-.1	0	8.2	10	37.29	52.1	-14.81	-	-
10	.3615	19.73	Ca	-.4	0	8.4	10	37.73	48.69	-10.96	-	-
14	4.308	16.19	Ca	.3	0	8.3	10	34.79	46	-11.21	-	-
18	*13.56	34.15	Ca	.2	.1	8.2	10	52.65	50	2.65	-	-
22	15.693	11.69	Ca	.2	.1	8.4	10	30.39	50	-19.61	-	-
1	.1545	31.74	Qp	.5	.1	8.5	10	50.84	-	-	65.75	-14.91
5	.24	31.95	Qp	-.1	0	8.2	10	50.05	-	-	62.1	-12.05
9	.3615	28.35	Qp	-.4	0	8.4	10	46.35	-	-	58.69	-12.34
13	4.227	29.67	Qp	-.1	0	7.9	10	47.47	-	-	56	-8.53
17	*13.56	41.35	Qp	.2	.1	8.2	10	59.85	-	-	60	-1.15
21	15.6863	18.74	Qp	.2	.1	8.3	10	37.34	-	-	60	-22.66

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

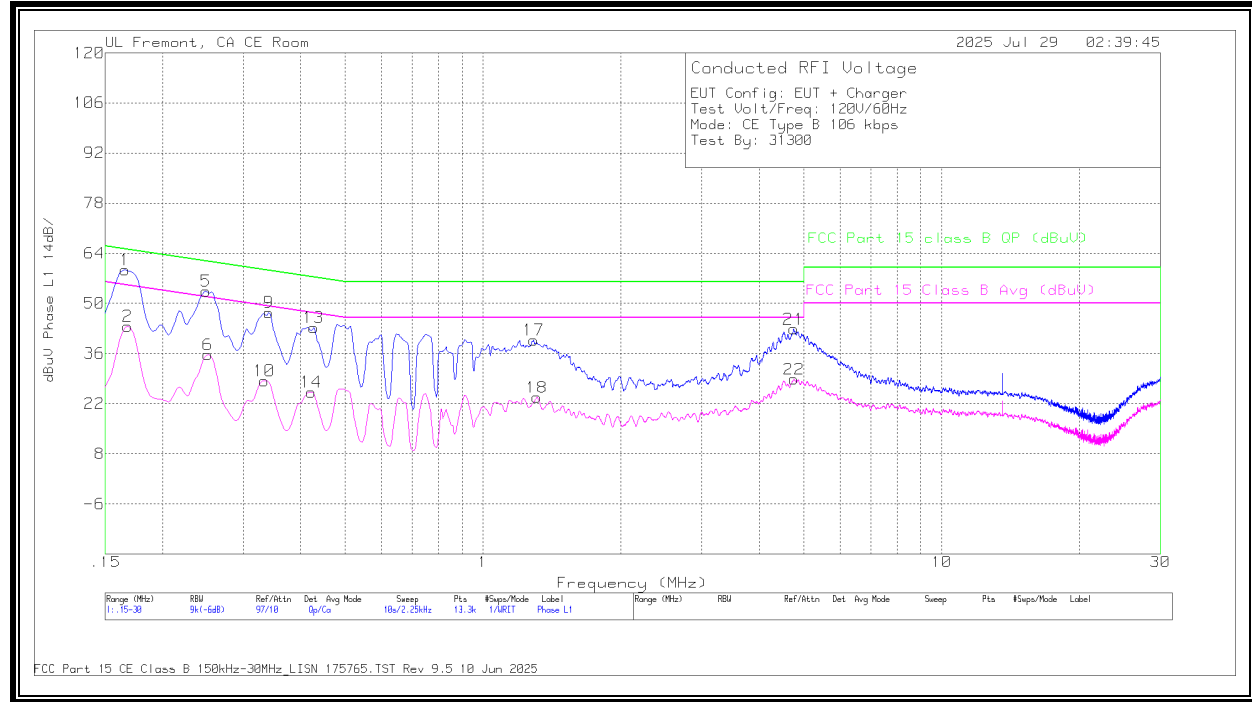
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1545	23.51	Ca	.5	.1	8.5	10	42.61	55.75	-13.14	-	-
8	.2423	18.65	Ca	-.1	0	8.2	10	36.75	52.02	-15.27	-	-
12	.3638	19.93	Ca	-.4	0	8.4	10	37.93	48.64	-10.71	-	-
16	4.308	15.98	Ca	.3	0	8.3	10	34.58	46	-11.42	-	-
20	*13.56	34.44	Ca	.2	.1	8.2	10	52.94	50	2.94	-	-
24	15.693	9.95	Ca	.2	.1	8.4	10	28.65	50	-21.35	-	-
3	.1545	27.73	Qp	.5	.1	8.5	10	46.83	-	-	65.75	-18.92
7	.2423	31.58	Qp	-.1	0	8.2	10	49.68	-	-	62.02	-12.34
11	.3638	28.57	Qp	-.4	0	8.4	10	46.57	-	-	58.64	-12.07
15	4.227	29.52	Qp	-.1	0	7.9	10	47.32	-	-	56	-8.68
19	*13.56	41.65	Qp	.2	.1	8.2	10	60.15	-	-	60	.15
23	15.5423	18.07	Qp	.2	.1	8.3	10	36.67	-	-	60	-23.33

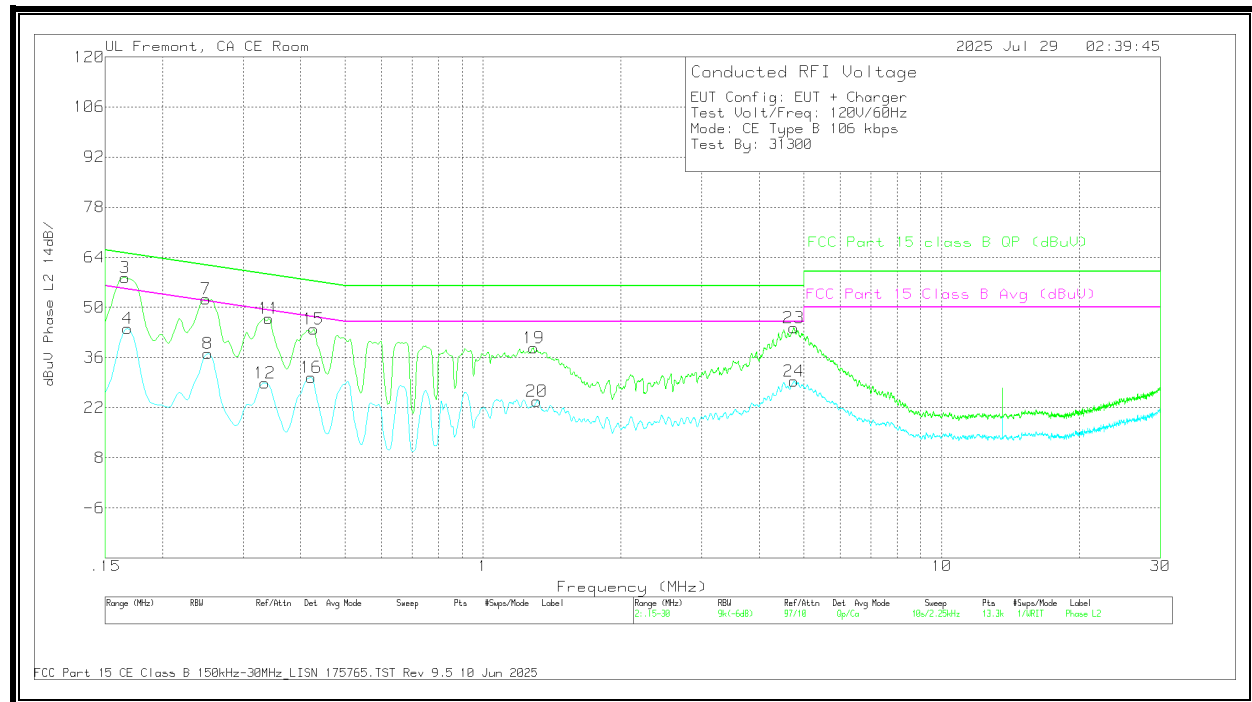
Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

11.1.4. CE MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED)**NORMAL OPERATION with charger and terminated, 106Kbps****LINE 1 RESULTS****DATA**

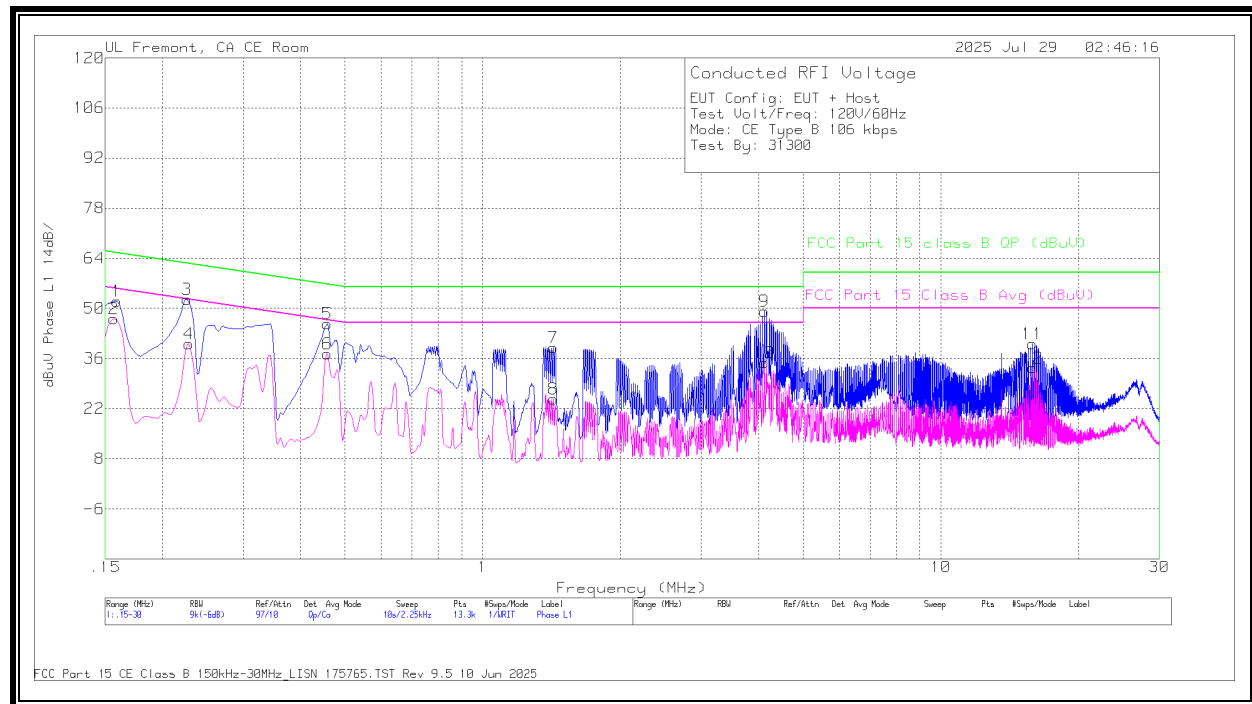
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.168	24.66	Ca	.4	.1	8.5	10	43.66	55.06	-11.4	-	-
6	.2513	17.54	Ca	-.1	0	8.2	10	35.64	51.72	-16.08	-	-
10	.3334	10.43	Ca	-.3	0	8.3	10	28.43	49.37	-20.94	-	-
14	.4223	6.84	Ca	-.2	0	8.6	10	25.24	47.4	-22.16	-	-
18	1.3088	5.12	Ca	.2	0	8.4	10	23.72	46	-22.28	-	-
22	4.767	10.1	Ca	.2	0	8.5	10	28.8	46	-17.2	-	-
1	.1658	40.34	Qp	.4	.1	8.5	10	59.34	-	-	65.17	-5.83
5	.249	35.27	Qp	-.1	0	8.2	10	53.37	-	-	61.79	-8.42
9	.3413	29.43	Qp	-.3	0	8.3	10	47.43	-	-	59.17	-11.74
13	.4268	24.74	Qp	-.1	0	8.6	10	43.24	-	-	57.32	-14.08
17	1.2885	21.21	Qp	.2	0	8.4	10	39.81	-	-	56	-16.19
21	4.7603	24.11	Qp	.2	0	8.5	10	42.81	-	-	56	-13.19

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.168	25.19	Ca	.4	.1	8.5	10	44.19	55.06	-10.87	-	-
8	.2513	18.96	Ca	-.1	0	8.2	10	37.06	51.72	-14.66	-	-
12	.3345	10.86	Ca	-.3	0	8.3	10	28.86	49.34	-20.48	-	-
16	.4223	12.03	Ca	-.2	0	8.6	10	30.43	47.4	-16.97	-	-
20	1.3088	5.24	Ca	.2	0	8.4	10	23.84	46	-22.16	-	-
24	4.767	10.73	Ca	.2	0	8.5	10	29.43	46	-16.57	-	-
3	.1658	39.34	Qp	.4	.1	8.5	10	58.34	-	-	65.17	-6.83
7	.249	34.32	Qp	-.1	0	8.2	10	52.42	-	-	61.79	-9.37
11	.3413	28.93	Qp	-.3	0	8.3	10	46.93	-	-	59.17	-12.24
15	.4268	25.47	Qp	-.1	0	8.6	10	43.97	-	-	57.32	-13.35
19	1.2885	20.08	Qp	.2	0	8.4	10	38.68	-	-	56	-17.32
23	4.7558	25.64	Qp	.2	0	8.5	10	44.34	-	-	56	-11.66

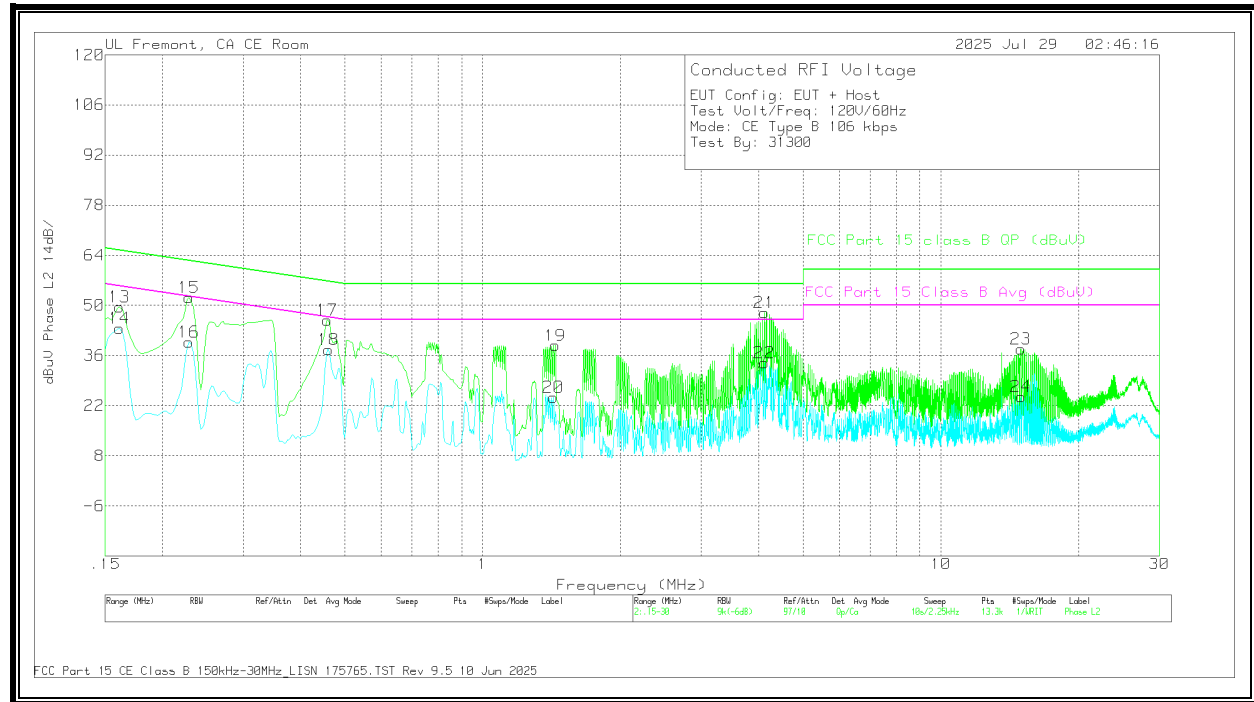
Qp - Quasi-Peak detector
Ca - CISPR average detection

NORMAL OPERATION with Host and terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1568	28.09	Ca	.4	.1	8.5	10	47.09	55.63	-8.54	-	-
4	.2288	21.8	Ca	0	0	8.3	10	40.1	52.49	-12.39	-	-
6	.4583	18.44	Ca	.2	0	8.7	10	37.34	46.72	-9.38	-	-
8	1.4258	6.16	Ca	.1	0	8.4	10	24.66	46	-21.34	-	-
10	4.1213	16.41	Ca	.2	0	8.3	10	34.91	46	-11.09	-	-
12	15.8483	14.65	Ca	.2	.1	8.4	10	33.35	50	-16.65	-	-
1	.159	33.07	Qp	.4	.1	8.5	10	52.07	-	-	65.52	-13.45
3	.2265	34.2	Qp	0	0	8.3	10	52.5	-	-	62.58	-10.08
5	.4583	26.77	Qp	.2	0	8.7	10	45.67	-	-	56.72	-11.05
7	1.4258	20.56	Qp	.1	0	8.4	10	39.06	-	-	56	-16.94
9	4.1213	30.73	Qp	.2	0	8.3	10	49.23	-	-	56	-6.77
11	15.846	21.39	Qp	.2	.1	8.4	10	40.09	-	-	60	-19.91

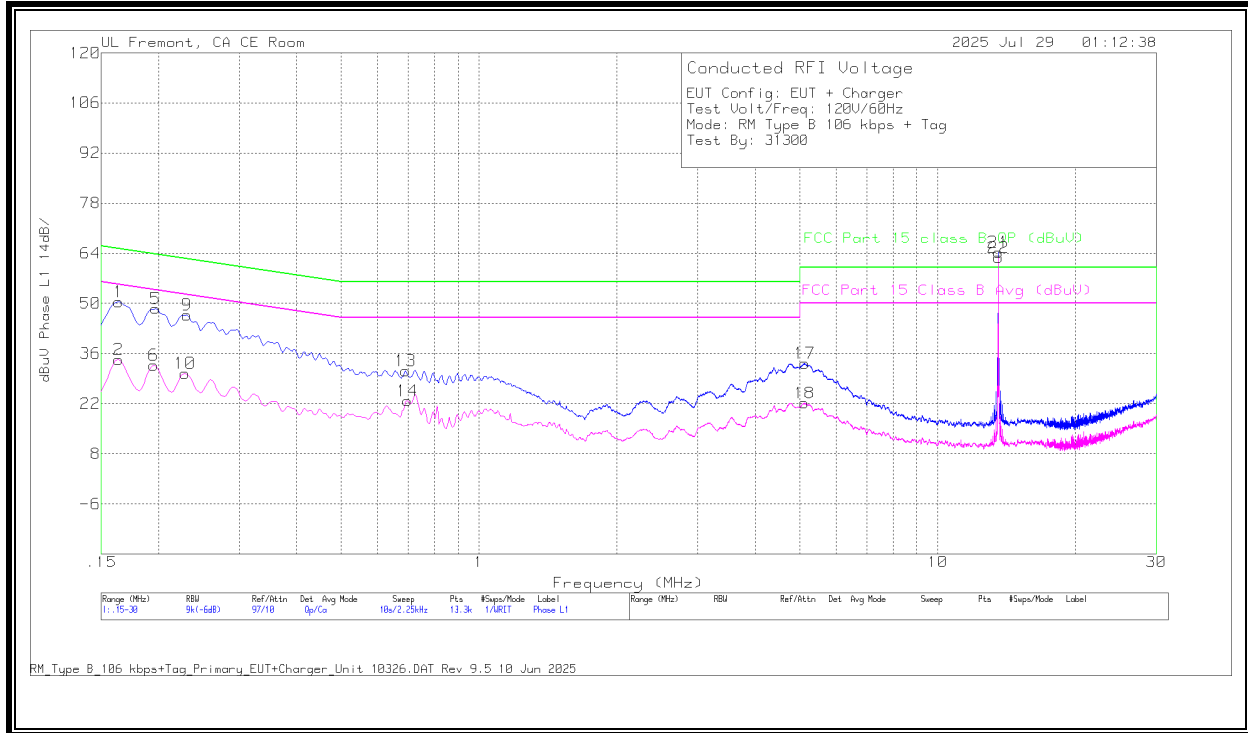
Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1613	24.65	Ca	.4	.1	8.5	10	43.65	55.4	-11.75	-	-
16	.2288	21.51	Ca	0	0	8.3	10	39.81	52.49	-12.68	-	-
18	.4605	18.89	Ca	.1	0	8.7	10	37.69	46.68	-8.99	-	-
20	1.4258	5.87	Ca	.1	0	8.4	10	24.37	46	-21.63	-	-
22	4.1213	15.5	Ca	.2	0	8.3	10	34	46	-12	-	-
24	14.9415	5.07	Ca	.5	.1	8.8	10	24.47	50	-25.53	-	-
13	.1613	30.62	Qp	.4	.1	8.5	10	49.62	-	-	65.4	-15.78
15	.2288	33.84	Qp	0	0	8.3	10	52.14	-	-	62.49	-10.35
17	.4583	26.98	Qp	.2	0	8.7	10	45.88	-	-	56.72	-10.84
19	1.4415	20.09	Qp	.1	0	8.6	10	38.79	-	-	56	-17.21
21	4.1213	29.45	Qp	.2	0	8.3	10	47.95	-	-	56	-8.05
23	14.9415	18.42	Qp	.5	.1	8.8	10	37.82	-	-	60	-22.18

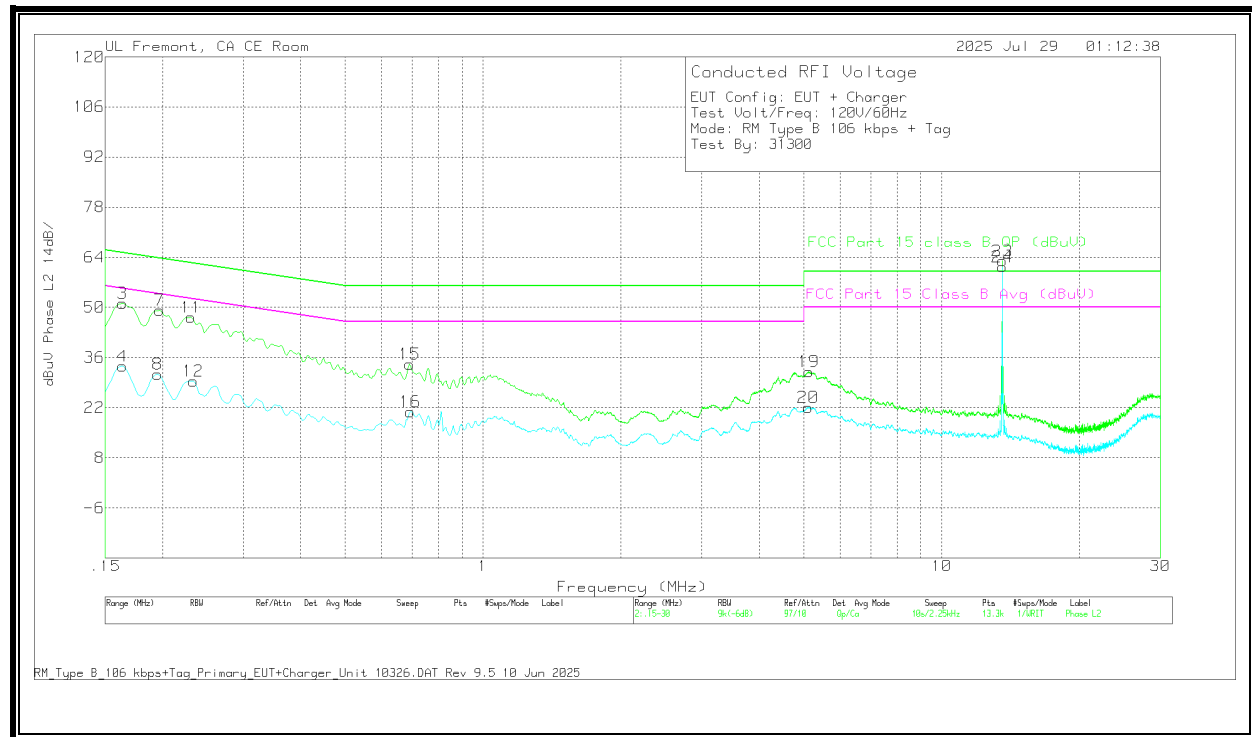
Qp - Quasi-Peak detector
Ca - CISPR average detection

11.1.5. TAG MODE: Type B, 106 Kbps**NORMAL OPERATION with charger and not terminated 106Kbps****LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1635	15.36	Ca	.4	.1	8.5	10	34.36	55.28	-20.92	-	-
6	.195	14.08	Ca	.1	.1	8.4	10	32.68	53.82	-21.14	-	-
10	.2288	12.12	Ca	0	0	8.3	10	30.42	52.49	-22.07	-	-
14	.699	4.43	Ca	.2	0	8.2	10	22.83	46	-23.17	-	-
18	5.1248	3.55	Ca	.2	0	8.4	10	22.15	50	-27.85	-	-
22	*13.56	44.3	Ca	.2	.1	8.2	10	62.8	50	12.8	-	-
1	.1635	31.51	Qp	.4	.1	8.5	10	50.51	-	-	65.28	-14.77
5	.1973	29.99	Qp	.1	.1	8.4	10	48.59	-	-	63.73	-15.14
9	.231	28.43	Qp	0	0	8.3	10	46.73	-	-	62.41	-15.68
13	.6923	12.79	Qp	.2	0	8.2	10	31.19	-	-	56	-24.81
17	5.127	14.71	Qp	.2	0	8.4	10	33.31	-	-	60	-26.69
21	*13.56	45.72	Qp	.2	.1	8.2	10	64.22	-	-	60	4.22

Qp - Quasi-Peak detector
 Ca - CISPR average detection
 * Fundamental

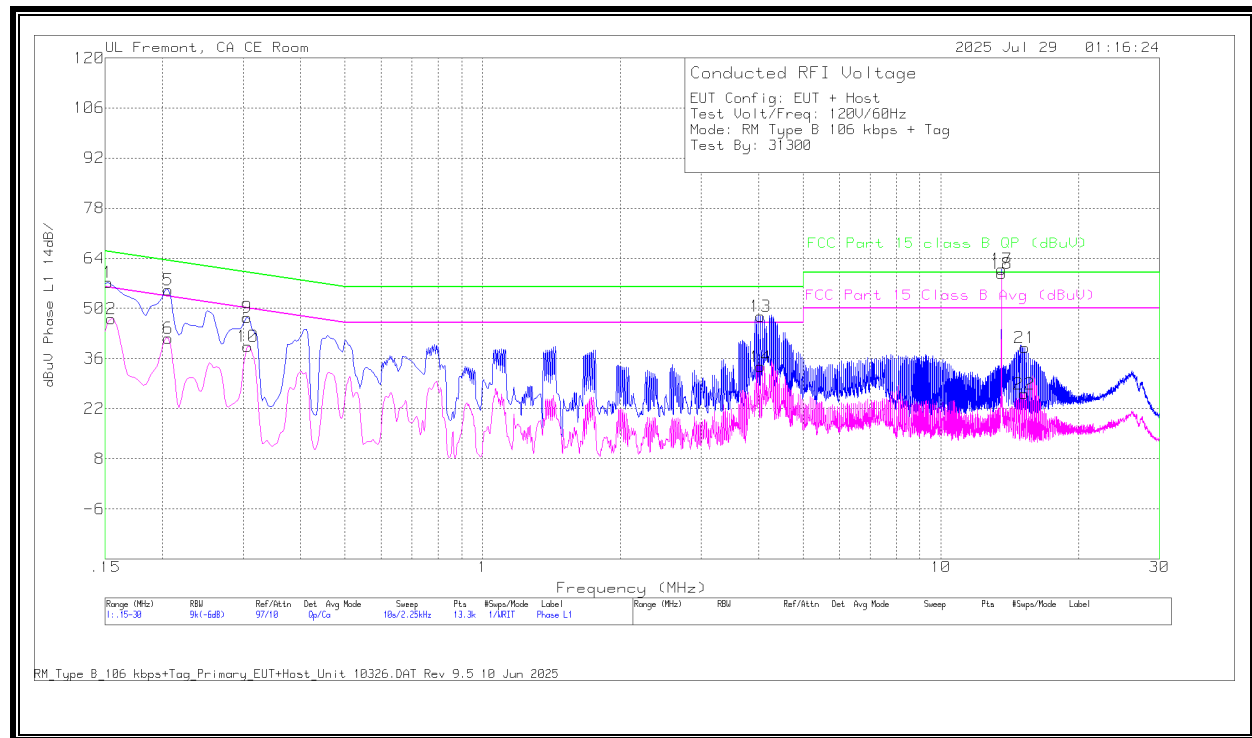
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.6 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1635	14.54	Ca	.4	.1	8.5	10	33.54	55.28	-21.74	-	-
8	.195	12.85	Ca	.1	0	8.4	10	31.35	53.82	-22.47	-	-
12	.2333	11.18	Ca	0	0	8.3	10	29.48	52.33	-22.85	-	-
16	.6945	2.49	Ca	.2	0	8.2	10	20.89	46	-25.11	-	-
20	5.1214	3.51	Ca	.2	0	8.4	10	22.11	50	-27.89	-	-
24	*13.56	42.88	Ca	.2	.1	8.2	10	61.38	50	11.38	-	-
3	.1635	32.18	Qp	.4	.1	8.5	10	51.18	-	-	65.28	-14.1
7	.1973	30.74	Qp	.1	0	8.4	10	49.24	-	-	63.73	-14.49
11	.231	28.91	Qp	0	0	8.3	10	47.21	-	-	62.41	-15.2
15	.6923	15.74	Qp	.2	0	8.2	10	34.14	-	-	56	-21.86
19	5.127	13.5	Qp	.2	0	8.4	10	32.1	-	-	60	-27.9
23	*13.56	44.47	Qp	.2	.1	8.2	10	62.97	-	-	60	2.97

Qp - Quasi-Peak detector
 Ca - CISPR average detection
 * Fundamental

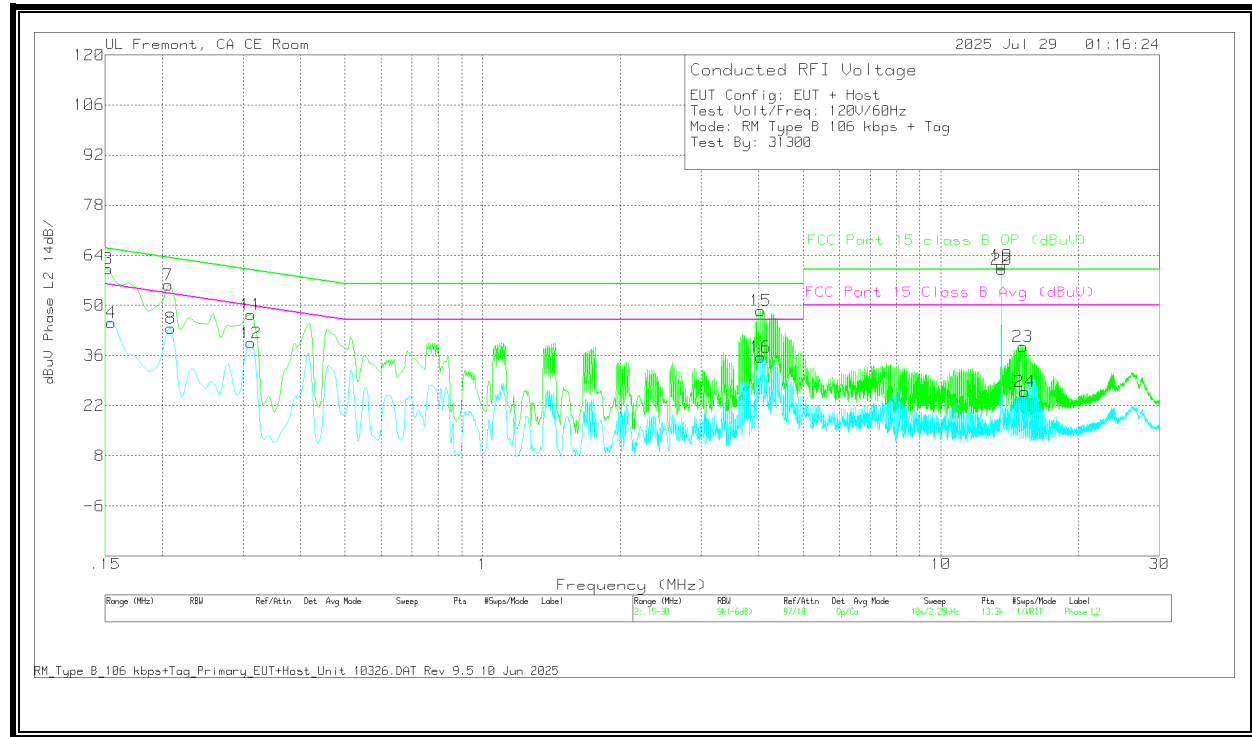
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.6 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

NORMAL OPERATION with Host and not terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	27.99	Ca	.5	.1	8.5	10	47.09	55.75	-8.66	-	-
6	.2063	23.23	Ca	.1	0	8.4	10	41.73	53.35	-11.62	-	-
10	.3075	21.38	Ca	-.1	0	8.1	10	39.38	50.04	-10.66	-	-
14	4.0425	15.81	Ca	-.1	0	8	10	33.71	46	-12.29	-	-
18	*13.56	41.27	Ca	.2	.1	8.2	10	59.77	50	9.77	-	-
22	15.2183	6.96	Ca	.5	.1	8.6	10	26.16	50	-23.84	-	-
1	.1523	38.14	Qp	.5	.1	8.5	10	57.24	-	-	65.88	-8.64
5	.2063	36.74	Qp	.1	0	8.4	10	55.24	-	-	63.35	-8.11
9	.3064	29.45	Qp	-.1	0	8.1	10	47.45	-	-	60.07	-12.62
13	4.0403	29.95	Qp	-.1	0	8	10	47.85	-	-	56	-8.15
17	*13.56	42.5	Qp	.2	.1	8.2	10	61	-	-	60	1
21	15.243	20.16	Qp	.3	.1	8.5	10	39.06	-	-	60	-20.94

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.6 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1545	26.11	Ca	.5	.1	8.5	10	45.21	55.75	-10.54	-	-
8	.2085	25.04	Ca	.1	0	8.4	10	43.54	53.26	-9.72	-	-
12	.312	21.5	Ca	-.1	0	8.1	10	39.5	49.92	-10.42	-	-
16	4.0403	17.6	Ca	-.1	0	8	10	35.5	46	-10.5	-	-
20	*13.56	41.58	Ca	.2	.1	8.2	10	60.08	50	10.08	-	-
24	15.243	6.94	Ca	.3	.1	8.5	10	25.84	50	-24.16	-	-
3	.1523	41.1	Qp	.5	.1	8.5	10	60.2	-	-	65.88	-5.68
7	.2063	37.22	Qp	.1	0	8.4	10	55.72	-	-	63.35	-7.63
11	.312	29.43	Qp	-.1	0	8.1	10	47.43	-	-	59.92	-12.49
15	4.0403	30.54	Qp	-.1	0	8	10	48.44	-	-	56	-7.56
19	*13.56	42.71	Qp	.2	.1	8.2	10	61.21	-	-	60	1.21
23	15.0833	19.8	Qp	.2	.1	8.4	10	38.5	-	-	60	-21.5

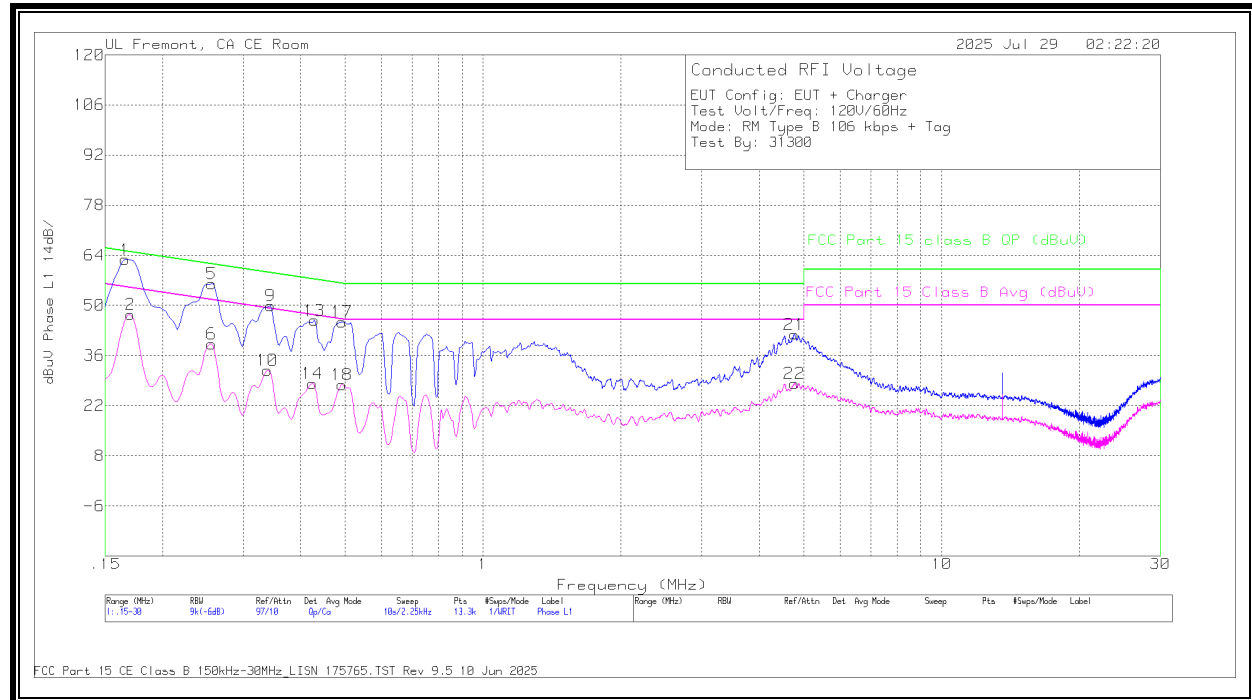
Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.1.6 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

11.1.6. TAG MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED)

NORMAL OPERATION with charger and terminated, 106Kbps

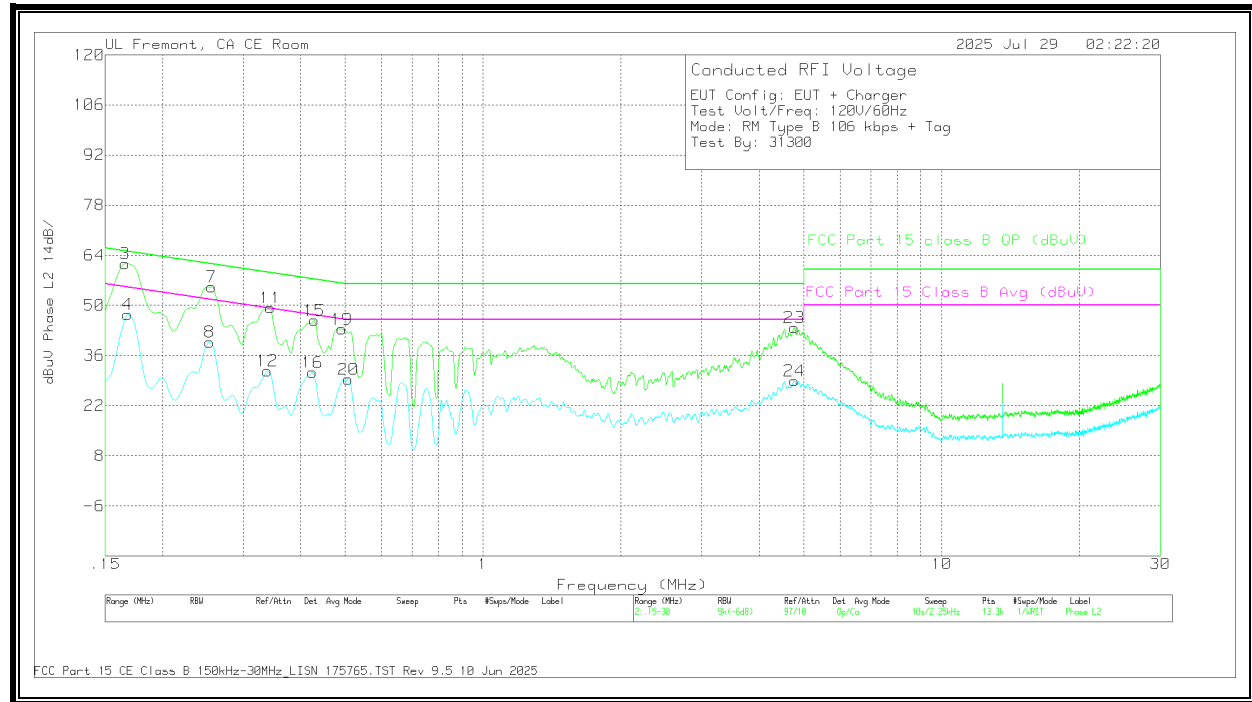
LINE 1 RESULTS



DATA

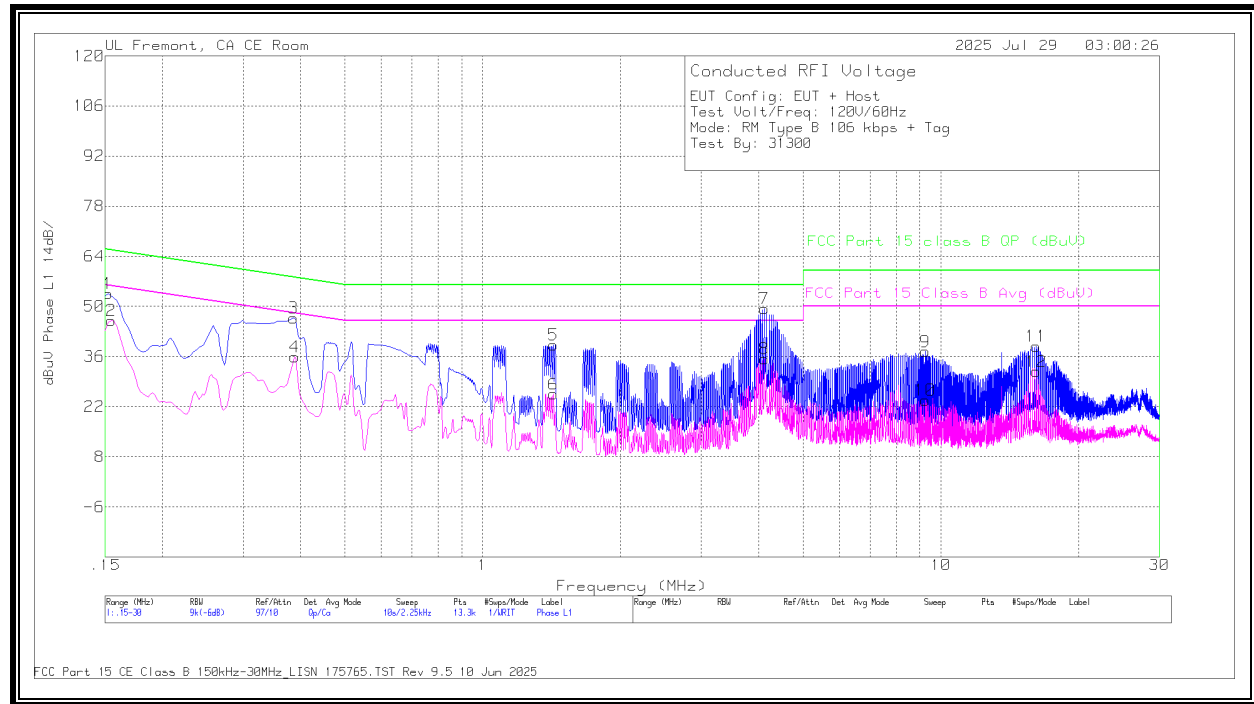
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1703	28.55	Ca	.3	.1	8.5	10	47.45	54.95	-7.5	-	-
6	.2558	21.14	Ca	-.1	0	8.2	10	39.24	51.57	-12.33	-	-
10	.339	13.87	Ca	-.3	0	8.3	10	31.87	49.23	-17.36	-	-
14	.4245	9.79	Ca	-.2	0	8.6	10	28.19	47.36	-19.17	-	-
18	.492	9.81	Ca	-.1	0	8.1	10	27.81	46.13	-18.32	-	-
22	4.776	9.55	Ca	.3	0	8.4	10	28.25	46	-17.75	-	-
1	.1658	43.8	Qp	.4	.1	8.5	10	62.8	-	-	65.17	-2.37
5	.2558	38.01	Qp	-.1	0	8.2	10	56.11	-	-	61.57	-5.46
9	.3435	31.95	Qp	-.3	0	8.3	10	49.95	-	-	59.12	-9.17
13	.429	27.29	Qp	-.1	0	8.6	10	45.79	-	-	57.27	-11.48
17	.492	27.29	Qp	-.1	0	8.1	10	45.29	-	-	56.13	-10.84
21	4.7738	23.23	Qp	.2	0	8.5	10	41.93	-	-	56	-14.07

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

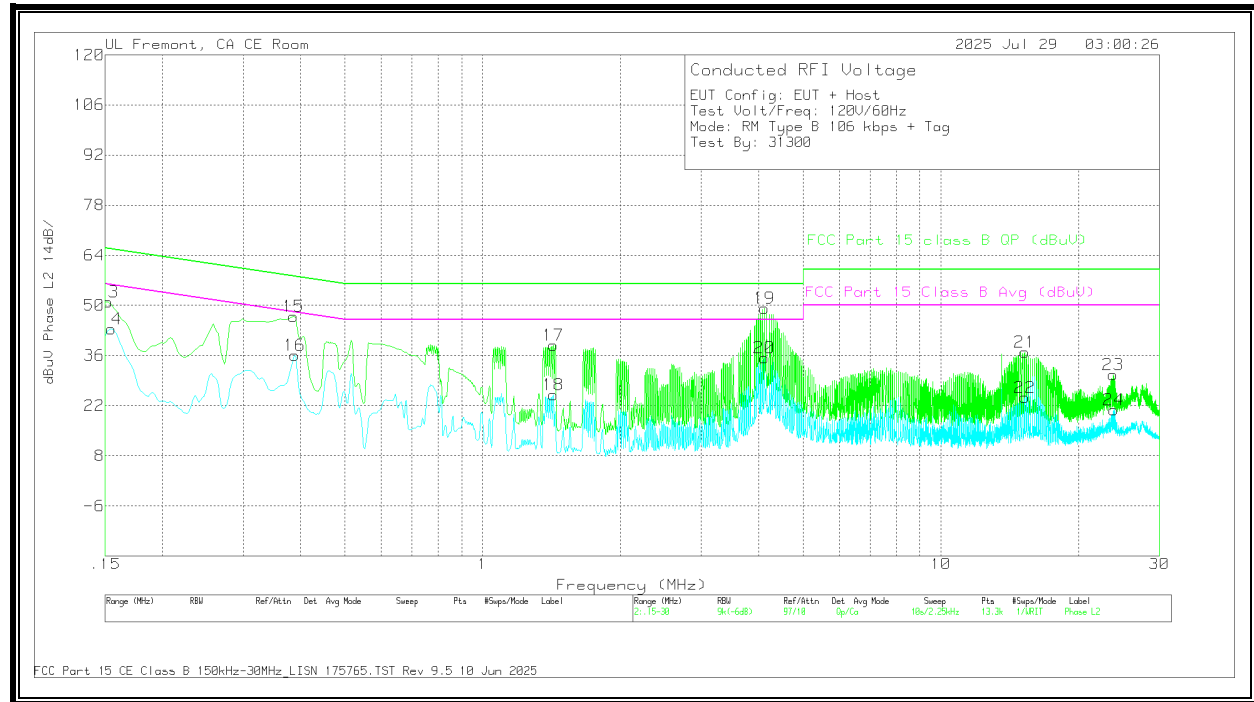
Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBUV	FCC Part 15 Class B Avg (dBUV)	Margin (dB)	FCC Part 15 class B QP (dBUV)	Margin (dB)
4	.168	28.39	Ca	.4	.1	8.5	10	47.39	55.06	-7.67	-	-
8	.2535	21.58	Ca	-.1	0	8.2	10	39.68	51.64	-11.96	-	-
12	.339	13.62	Ca	-.3	0	8.3	10	31.62	49.23	-17.61	-	-
16	.4245	12.85	Ca	-.2	0	8.6	10	31.25	47.36	-16.11	-	-
20	.5089	11.63	Ca	-.2	0	7.9	10	29.33	46	-16.67	-	-
24	4.7738	10.26	Ca	.2	0	8.5	10	28.96	46	-17.04	-	-
3	.1658	42.7	Qp	.4	.1	8.5	10	61.7	-	-	65.17	-3.47
7	.2558	37.09	Qp	-.1	0	8.2	10	55.19	-	-	61.57	-6.38
11	.3435	31.3	Qp	-.3	0	8.3	10	49.3	-	-	59.12	-9.82
15	.429	27.29	Qp	-.1	0	8.6	10	45.79	-	-	57.27	-11.48
19	.492	25.34	Qp	-.1	0	8.1	10	43.34	-	-	56.13	-12.79
23	4.7693	25.12	Qp	.2	0	8.5	10	43.82	-	-	56	-12.18

Qp - Quasi-Peak detector
Ca - CISPR average detection

NORMAL OPERATION with Host and terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	27	Ca	.5	.1	8.5	10	46.1	55.75	-9.65	-	-
4	.3885	18.1	Ca	-.5	0	8.3	10	35.9	48.1	-12.2	-	-
6	1.4258	6.97	Ca	.1	0	8.4	10	25.47	46	-20.53	-	-
8	4.1168	16.87	Ca	.2	0	8.3	10	35.37	46	-10.63	-	-
10	9.2513	4.27	Ca	.5	0	9	10	23.77	50	-26.23	-	-
12	16.1498	13.08	Ca	.3	.1	8.3	10	31.78	50	-18.22	-	-
1	.1523	34.49	Qp	.5	.1	8.5	10	53.59	-	-	65.88	-12.29
3	.3863	28.98	Qp	-.5	0	8.3	10	46.78	-	-	58.14	-11.36
5	1.4258	20.78	Qp	.1	0	8.4	10	39.28	-	-	56	-16.72
7	4.1168	30.9	Qp	.2	0	8.3	10	49.4	-	-	56	-6.6
9	9.2535	17.88	Qp	.5	0	9	10	37.38	-	-	60	-22.62
11	16.1543	20.19	Qp	.3	.1	8.3	10	38.89	-	-	60	-21.11

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1545	24.26	Ca	.5	.1	8.5	10	43.36	55.75	-12.39	-	-
16	.3885	18.33	Ca	-.5	0	8.3	10	36.13	48.1	-11.97	-	-
18	1.4258	6.5	Ca	.1	0	8.4	10	25	46	-21	-	-
20	4.1168	16.8	Ca	.2	0	8.3	10	35.3	46	-10.7	-	-
22	15.2318	5.35	Ca	.3	.1	8.5	10	24.25	50	-25.75	-	-
24	23.8313	1.96	Ca	.2	.2	8.4	10	20.76	50	-29.24	-	-
13	.1523	31.91	Qp	.5	.1	8.5	10	51.01	-	-	65.88	-14.87
15	.3863	29.15	Qp	-.5	0	8.3	10	46.95	-	-	58.14	-11.19
17	1.4258	20.41	Qp	.1	0	8.4	10	38.91	-	-	56	-17.09
19	4.1168	30.71	Qp	.2	0	8.3	10	49.21	-	-	56	-6.79
21	15.2318	18.05	Qp	.3	.1	8.5	10	36.95	-	-	60	-23.05
23	23.757	11.17	Qp	.6	.2	8.6	10	30.57	-	-	60	-29.43

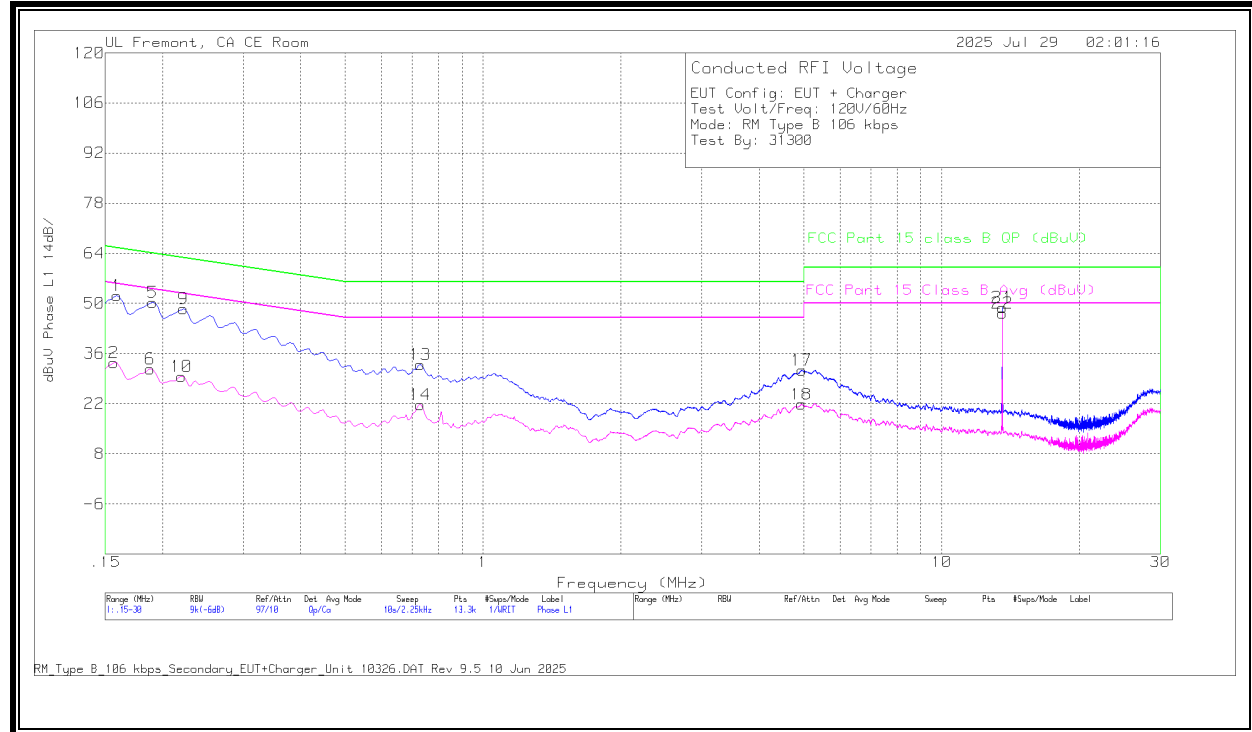
Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2. SECONDARY ANTENNA

11.2.1. READER MODE: Type B, 106 Kbps

NORMAL OPERATION with charger and not terminated 106Kbps

LINE 1 RESULTS

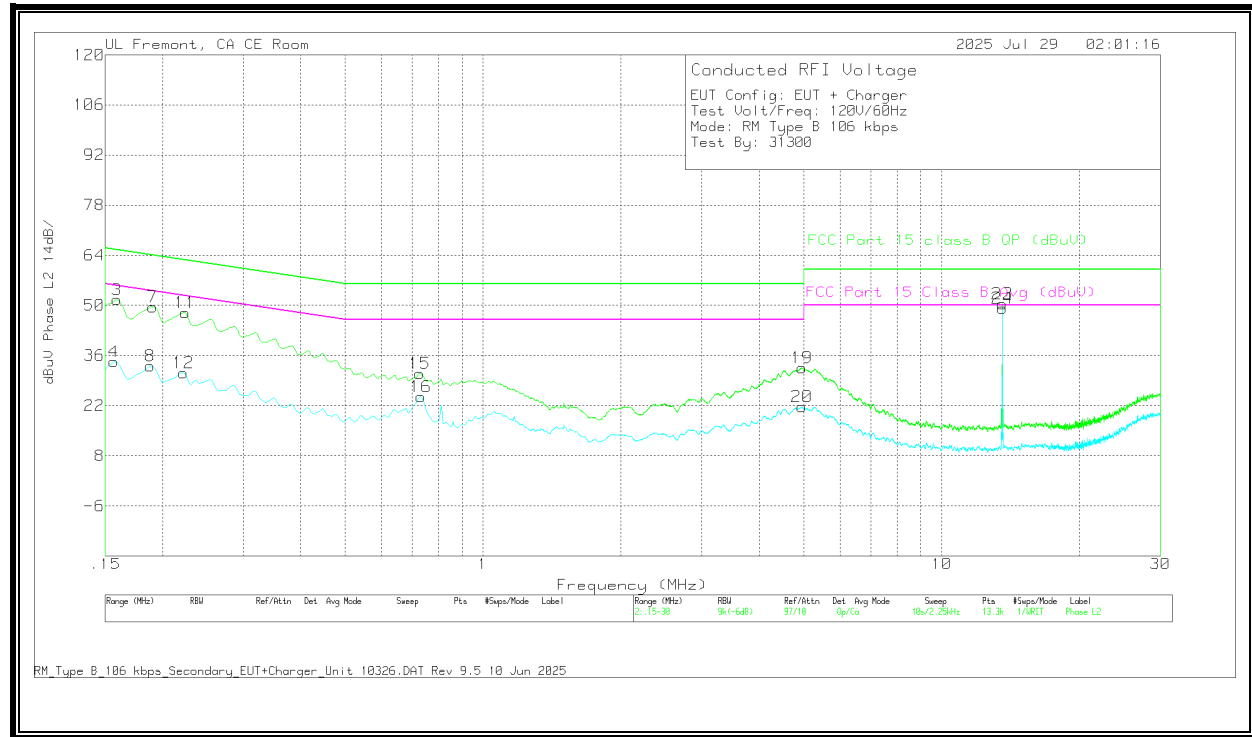


DATA

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1568	14.5	Ca	.4	.1	8.5	10	33.5	55.63	-22.13	-	-
6	.1883	13.05	Ca	.2	.1	8.4	10	31.75	54.11	-22.36	-	-
10	.2198	11.35	Ca	0	0	8.3	10	29.65	52.83	-23.18	-	-
14	.7305	3.22	Ca	.1	0	8.4	10	21.72	46	-24.28	-	-
18	4.9493	3.3	Ca	.2	0	8.3	10	21.8	46	-24.2	-	-
22	*13.56	28.82	Ca	.2	.1	8.2	10	47.32	50	-2.68	-	-
1	.159	33.21	Qp	.4	.1	8.5	10	52.21	-	-	65.52	-13.31
5	.1905	31.59	Qp	.2	.1	8.4	10	50.29	-	-	64.01	-13.72
9	.222	30.14	Qp	0	0	8.3	10	48.44	-	-	62.74	-14.3
13	.7305	14.4	Qp	.1	0	8.4	10	32.9	-	-	56	-23.1
17	4.9515	12.87	Qp	.2	0	8.3	10	31.37	-	-	56	-24.63
21	*13.56	30.41	Qp	.2	.1	8.2	10	48.91	-	-	60	-11.09

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

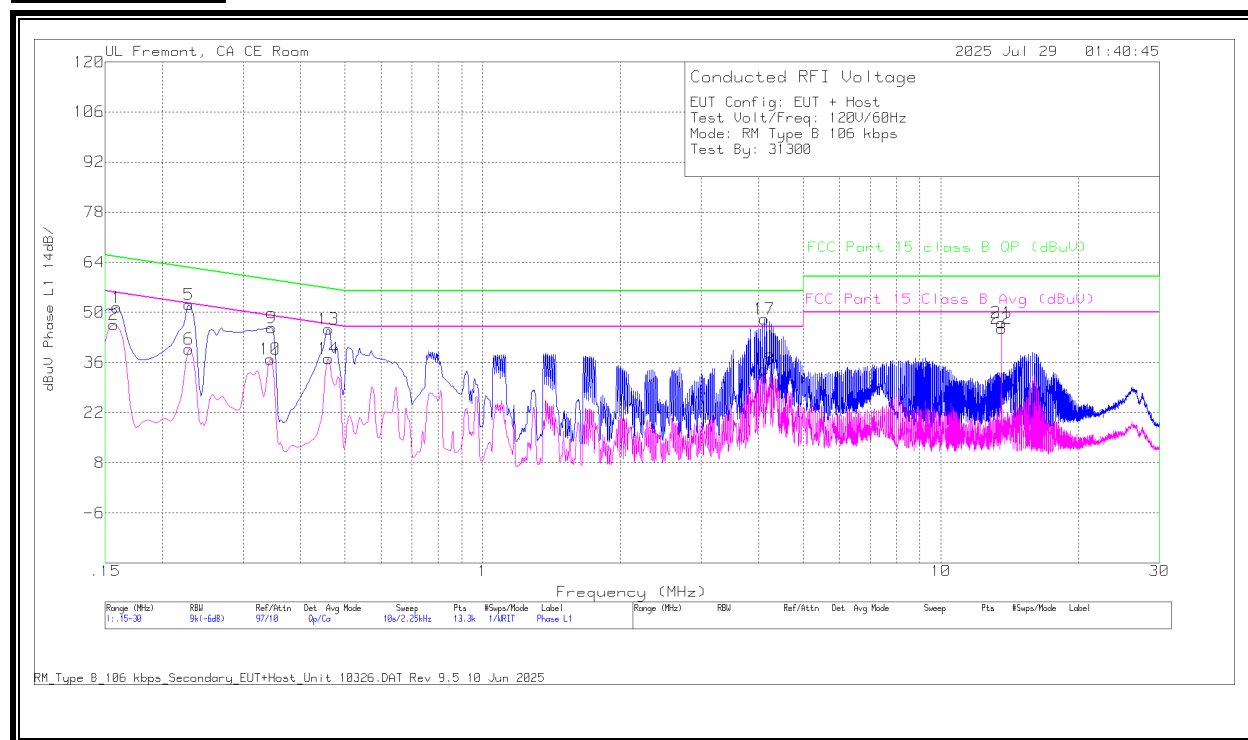
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1568	15.24	Ca	.4	.1	8.5	10	34.24	55.63	-21.39	-	-
8	.1883	14.5	Ca	.2	0	8.4	10	33.1	54.11	-21.01	-	-
12	.222	12.85	Ca	0	0	8.3	10	31.15	52.74	-21.59	-	-
16	.7328	5.84	Ca	.1	0	8.5	10	24.44	46	-21.56	-	-
20	4.956	3.15	Ca	.2	0	8.3	10	21.65	46	-24.35	-	-
24	*13.56	30.7	Ca	.2	.1	8.2	10	49.2	50	-8	-	-
3	.159	32.58	Qp	.4	.1	8.5	10	51.58	-	-	65.52	-13.94
7	.1905	31.02	Qp	.2	0	8.4	10	49.62	-	-	64.01	-14.39
11	.2243	29.65	Qp	0	0	8.3	10	47.95	-	-	62.66	-14.71
15	.7283	12.46	Qp	.1	0	8.4	10	30.96	-	-	56	-25.04
19	4.9538	14.07	Qp	.2	0	8.3	10	32.57	-	-	56	-23.43
23	*13.56	31.96	Qp	.2	.1	8.2	10	50.46	-	-	60	-9.54

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

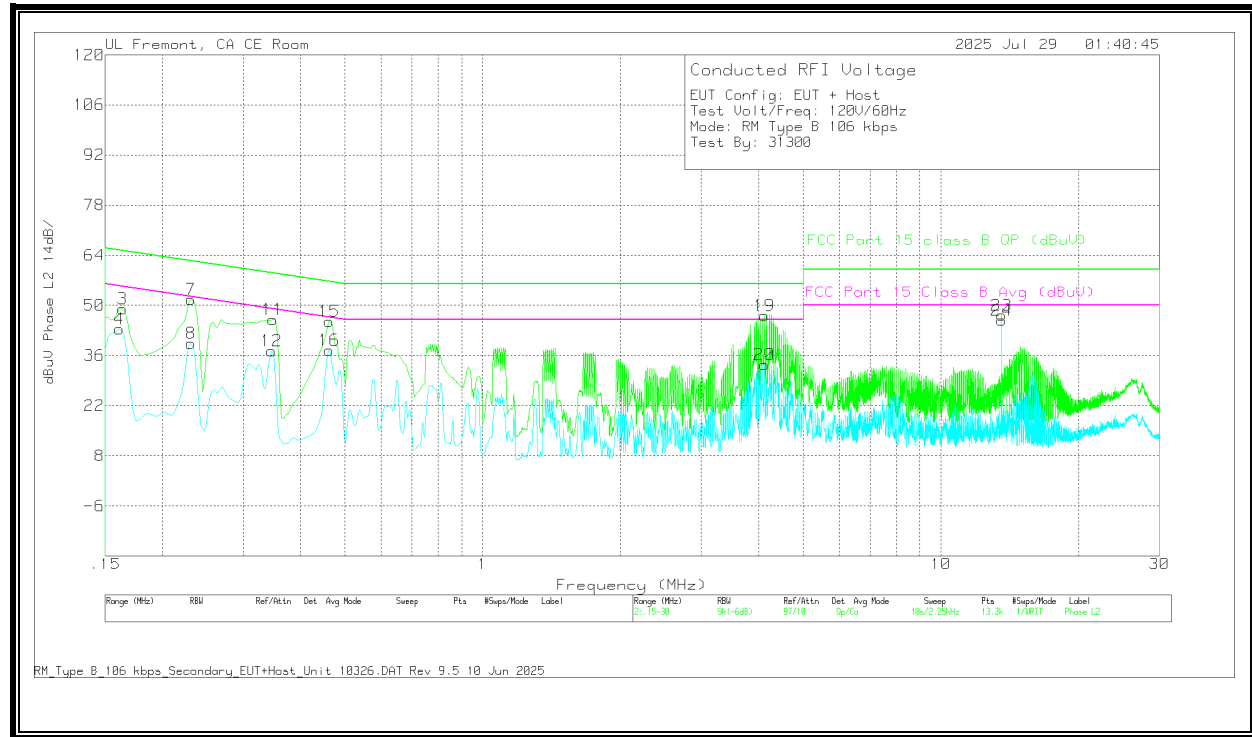
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

NORMAL OPERATION with Host and not terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1568	27.51	Ca	.4	.1	8.5	10	46.51	55.63	-9.12	-	-
6	.2288	21.38	Ca	0	0	8.3	10	39.68	52.49	-12.81	-	-
10	.3435	18.9	Ca	-.3	0	8.3	10	36.9	49.12	-12.22	-	-
14	.4605	18.37	Ca	.1	0	8.7	10	37.17	46.68	-9.51	-	-
18	4.119	15.66	Ca	.2	0	8.3	10	34.16	46	-11.84	-	-
22	*13.56	27.07	Ca	.2	.1	8.2	10	45.57	50	-4.43	-	-
1	.159	32.4	Qp	.4	.1	8.5	10	51.4	-	-	65.52	-14.12
5	.2288	33.82	Qp	0	0	8.3	10	52.12	-	-	62.49	-10.37
9	.3458	27.75	Qp	-.4	0	8.4	10	45.75	-	-	59.06	-13.31
13	.4605	26.56	Qp	.1	0	8.7	10	45.36	-	-	56.68	-11.32
17	4.119	29.64	Qp	.2	0	8.3	10	48.14	-	-	56	-7.86
21	*13.56	28.63	Qp	.2	.1	8.2	10	47.13	-	-	60	-12.87

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1613	24.41	Ca	.4	.1	8.5	10	43.41	55.4	-11.99	-	-
8	.231	21.11	Ca	0	0	8.3	10	39.41	52.41	-13	-	-
12	.3458	19.28	Ca	-.4	0	8.4	10	37.28	49.06	-11.78	-	-
16	.4628	18.76	Ca	.1	0	8.6	10	37.46	46.64	-9.18	-	-
20	4.119	14.88	Ca	.2	0	8.3	10	33.38	46	-12.62	-	-
24	*13.56	27.3	Ca	.2	.1	8.2	10	45.8	50	-4.2	-	-
3	.1635	30.05	Qp	.4	.1	8.5	10	49.05	-	-	65.28	-16.23
7	.231	33.38	Qp	0	0	8.3	10	51.68	-	-	62.41	-10.73
11	.348	28.09	Qp	-.4	0	8.4	10	46.09	-	-	59.01	-12.92
15	.4628	26.78	Qp	.1	0	8.6	10	45.48	-	-	56.64	-11.16
19	4.119	28.56	Qp	.2	0	8.3	10	47.06	-	-	56	-8.94
23	*13.56	28.71	Qp	.2	.1	8.2	10	47.21	-	-	60	-12.79

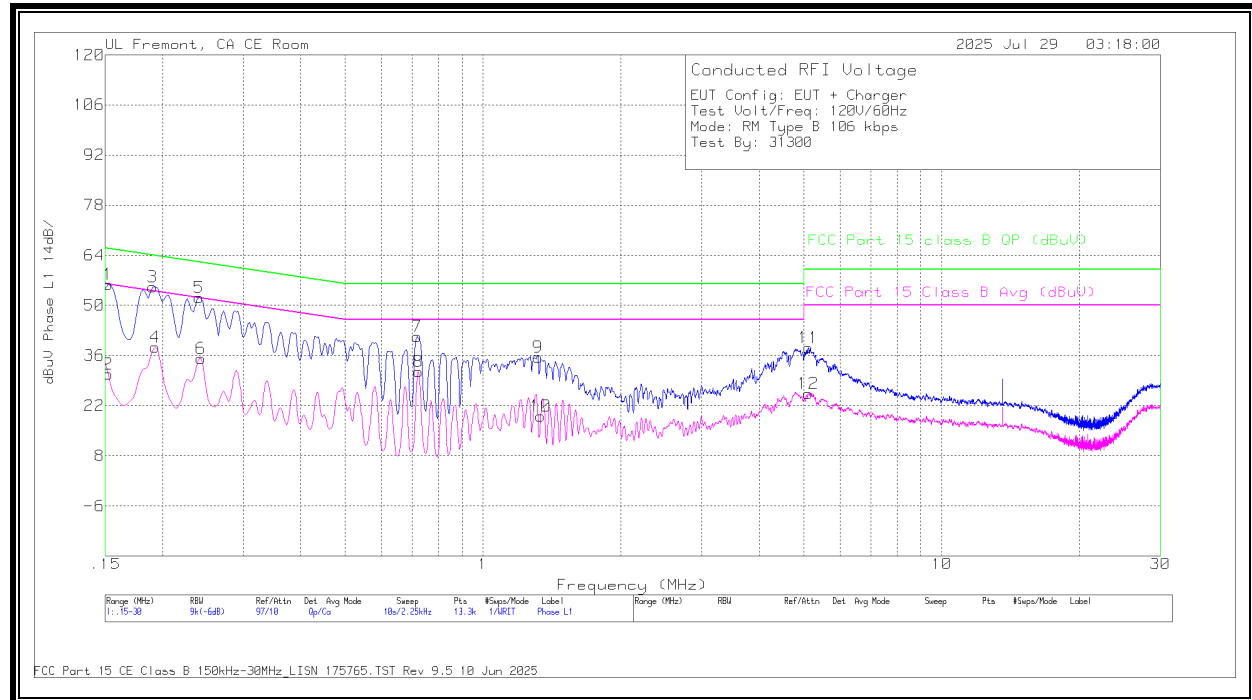
Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.2 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

11.2.2. READER MODE: Type B, 106 Kbps (ANTENNA PORT TERMINATED)

NORMAL OPERATION with charger and terminated, 106Kbps

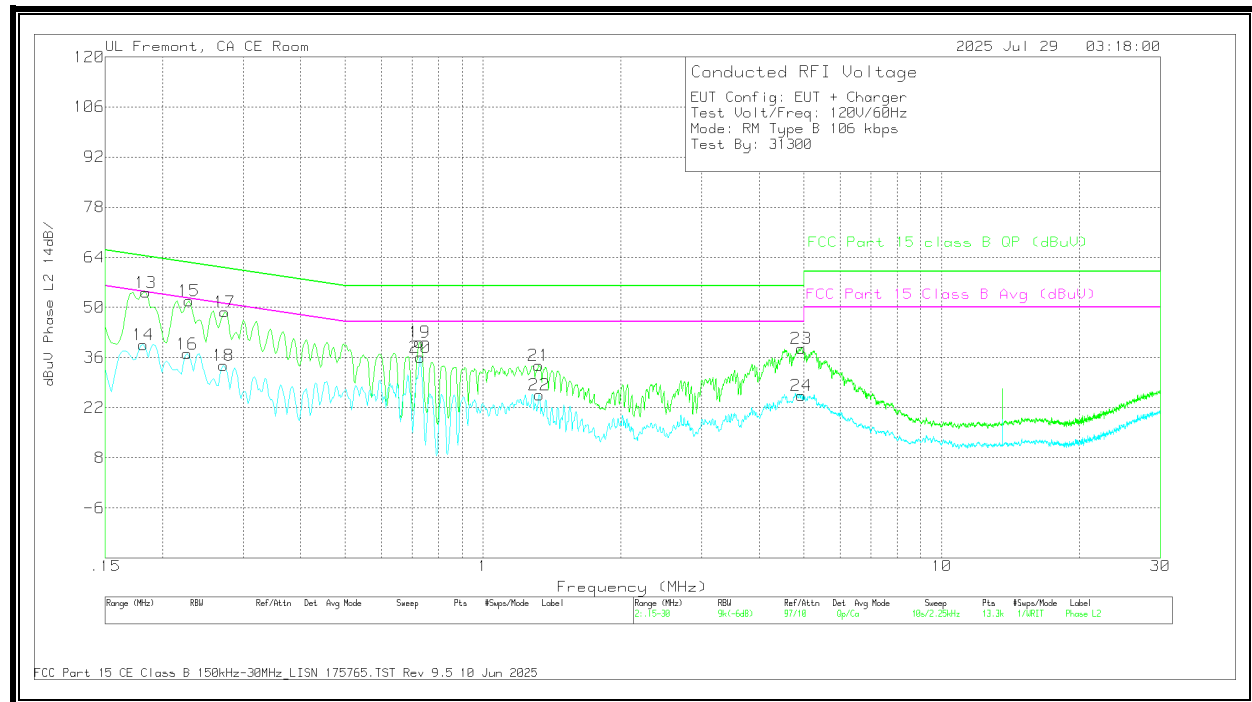
LINE 1 RESULTS



DATA

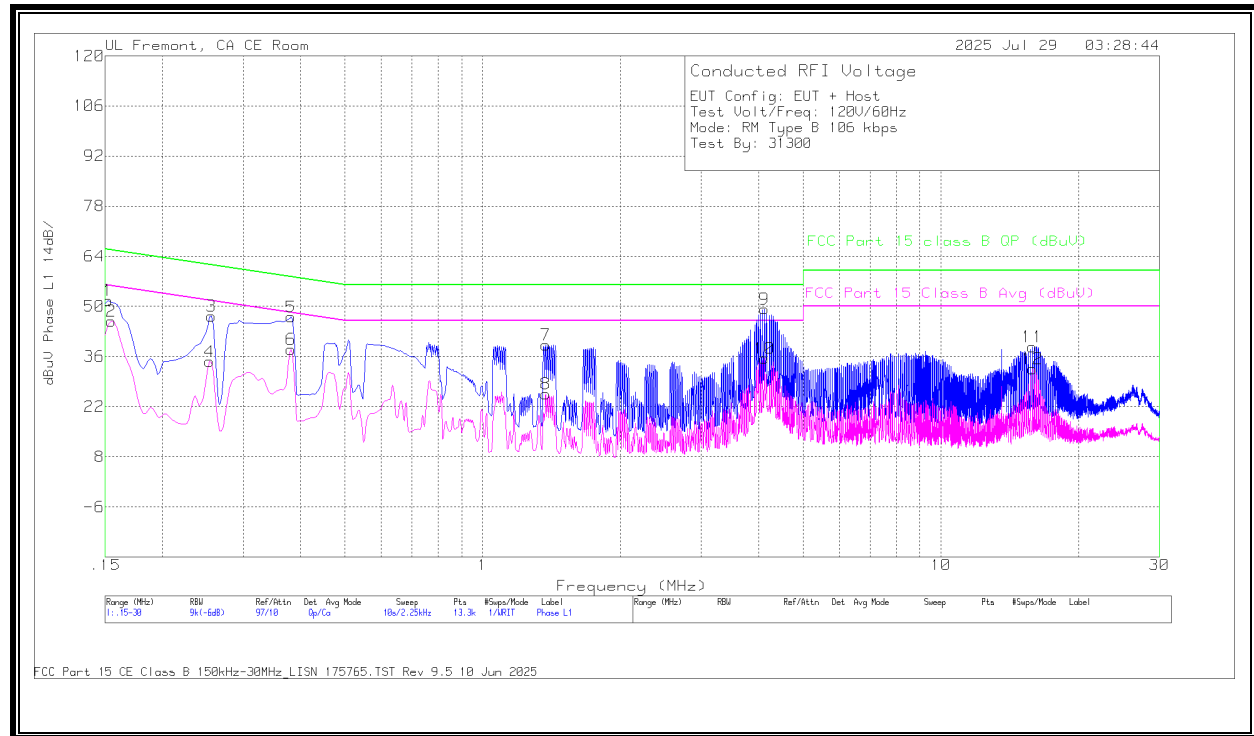
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1523	11.71	Ca	.5	.1	8.5	10	30.81	55.88	-25.07	-	-
4	.1928	19.63	Ca	.2	.1	8.4	10	38.33	53.92	-15.59	-	-
6	.2423	17.11	Ca	-.1	0	8.2	10	35.21	52.02	-16.81	-	-
8	.7238	12.89	Ca	.2	0	8.4	10	31.49	46	-14.51	-	-
10	1.3358	.39	Ca	.2	0	8.5	10	19.09	46	-26.91	-	-
12	5.1203	6.84	Ca	.2	0	8.4	10	25.44	50	-24.56	-	-
1	.1523	36.8	Qp	.5	.1	8.5	10	55.9	-	-	65.88	-9.98
3	.1905	36.5	Qp	.2	.1	8.4	10	55.2	-	-	64.01	-8.81
5	.24	34.11	Qp	-.1	0	8.2	10	52.21	-	-	62.1	-9.89
7	.7193	22.69	Qp	.2	0	8.4	10	41.29	-	-	56	-14.71
9	1.3178	16.83	Qp	.2	0	8.5	10	35.53	-	-	56	-20.47
11	5.1248	19.57	Qp	.2	0	8.4	10	38.17	-	-	60	-21.83

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

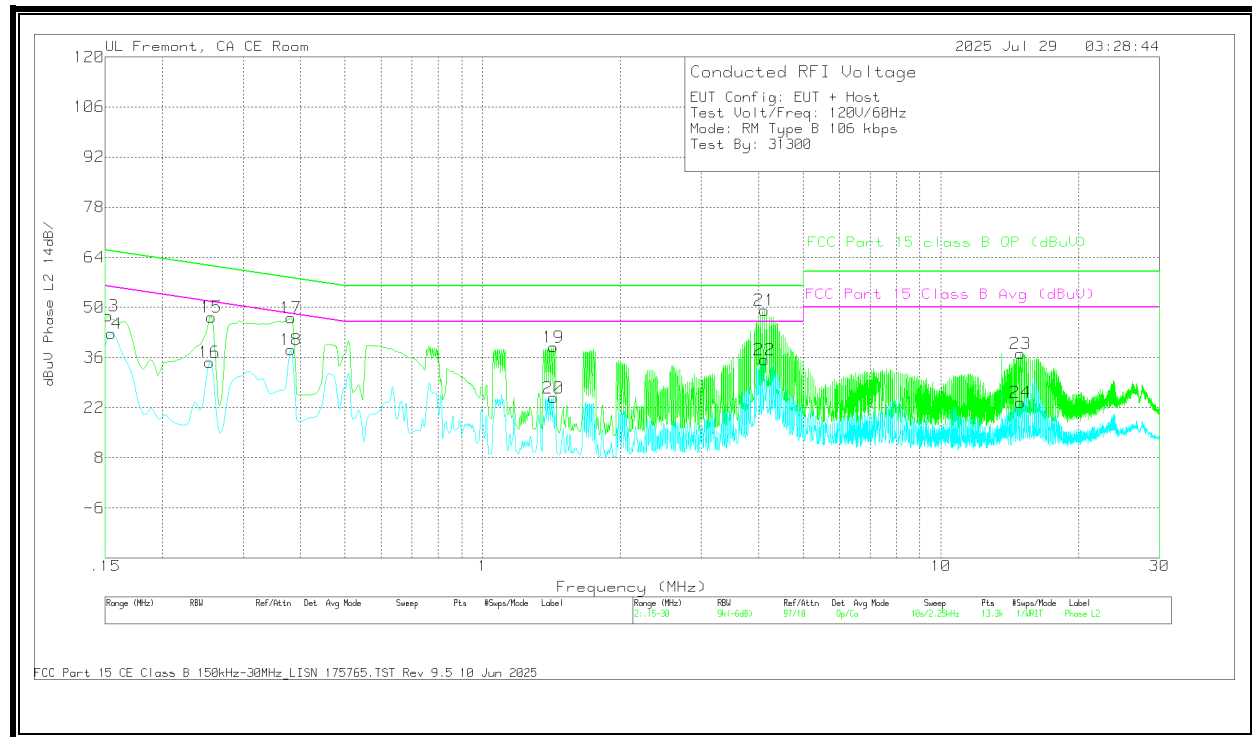
Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1815	20.97	Ca	.2	0	8.4	10	39.57	54.42	-14.85	-	-
16	.2265	18.73	Ca	0	0	8.3	10	37.03	52.58	-15.55	-	-
18	.2715	15.74	Ca	-.1	0	8.1	10	33.74	51.07	-17.33	-	-
20	.7305	17.55	Ca	.1	0	8.4	10	36.05	46	-9.95	-	-
22	1.3268	6.91	Ca	.2	0	8.5	10	25.61	46	-20.39	-	-
24	4.938	7.02	Ca	.2	0	8.2	10	25.42	46	-20.58	-	-
13	.1838	35.6	Qp	.2	0	8.4	10	54.2	-	-	64.31	-10.11
15	.2288	33.48	Qp	0	0	8.3	10	51.78	-	-	62.49	-10.71
17	.2738	30.76	Qp	-.1	0	8.1	10	48.76	-	-	61	-12.24
19	.7283	21.73	Qp	.1	0	8.4	10	40.23	-	-	56	-15.77
21	1.3223	15.15	Qp	.2	0	8.5	10	33.85	-	-	56	-22.15
23	4.938	20.18	Qp	.2	0	8.2	10	38.58	-	-	56	-17.42

Qp - Quasi-Peak detector
Ca - CISPR average detection

NORMAL OPERATION with Host and terminated, 106Kbps**LINE 1 RESULTS****DATA**

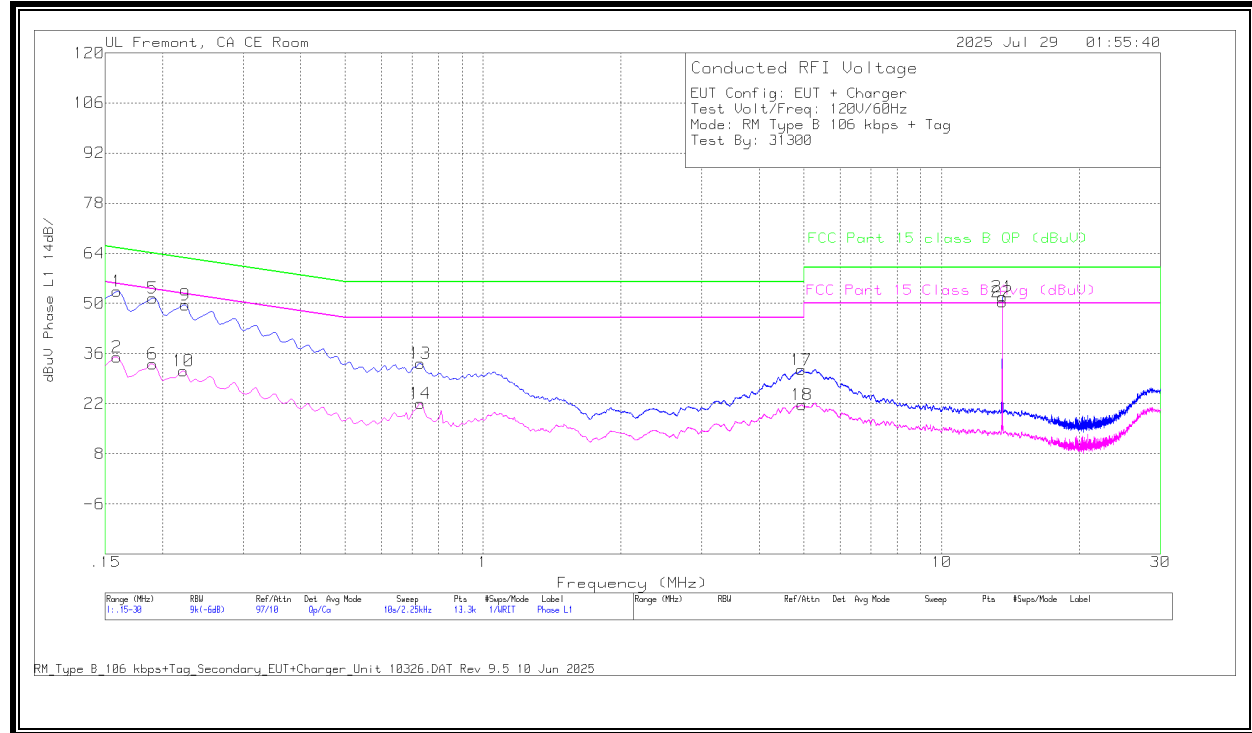
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	26.82	Ca	.5	.1	8.5	10	45.92	55.75	-9.83	-	-
4	.2535	16.48	Ca	-.1	0	8.2	10	34.58	51.64	-17.06	-	-
6	.3818	20.19	Ca	-.5	0	8.3	10	37.99	48.24	-10.25	-	-
8	1.3718	7.04	Ca	.2	0	8.3	10	25.54	46	-20.46	-	-
10	4.119	16.96	Ca	.2	0	8.3	10	35.46	46	-10.54	-	-
12	15.8471	13.91	Ca	.2	.1	8.4	10	32.61	50	-17.39	-	-
1	.1523	32.6	Qp	.5	.1	8.5	10	51.7	-	-	65.88	-14.18
3	.2558	29.14	Qp	-.1	0	8.2	10	47.24	-	-	61.57	-14.33
5	.3818	29.23	Qp	-.5	0	8.3	10	47.03	-	-	58.24	-11.21
7	1.3718	20.67	Qp	.2	0	8.3	10	39.17	-	-	56	-16.83
9	4.119	30.79	Qp	.2	0	8.3	10	49.29	-	-	56	-6.71
11	15.846	19.95	Qp	.2	.1	8.4	10	38.65	-	-	60	-21.35

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1545	23.55	Ca	.5	.1	8.5	10	42.65	55.75	-13.1	-	-
16	.2535	16.56	Ca	-.1	0	8.2	10	34.66	51.64	-16.98	-	-
18	.3818	20.34	Ca	-.5	0	8.3	10	38.14	48.24	-10.1	-	-
20	1.4258	6.26	Ca	.1	0	8.4	10	24.76	46	-21.24	-	-
22	4.119	16.82	Ca	.2	0	8.3	10	35.32	46	-10.68	-	-
24	14.9348	4.29	Ca	.4	.1	8.7	10	23.49	50	-26.51	-	-
13	.1523	28.47	Qp	.5	.1	8.5	10	47.57	-	-	65.88	-18.31
15	.2558	29.14	Qp	-.1	0	8.2	10	47.24	-	-	61.57	-14.33
17	.3818	29.38	Qp	-.5	0	8.3	10	47.18	-	-	58.24	-11.06
19	1.4258	20.45	Qp	.1	0	8.4	10	38.95	-	-	56	-17.05
21	4.119	30.69	Qp	.2	0	8.3	10	49.19	-	-	56	-6.81
23	14.9348	17.91	Qp	.4	.1	8.7	10	37.11	-	-	60	-22.89

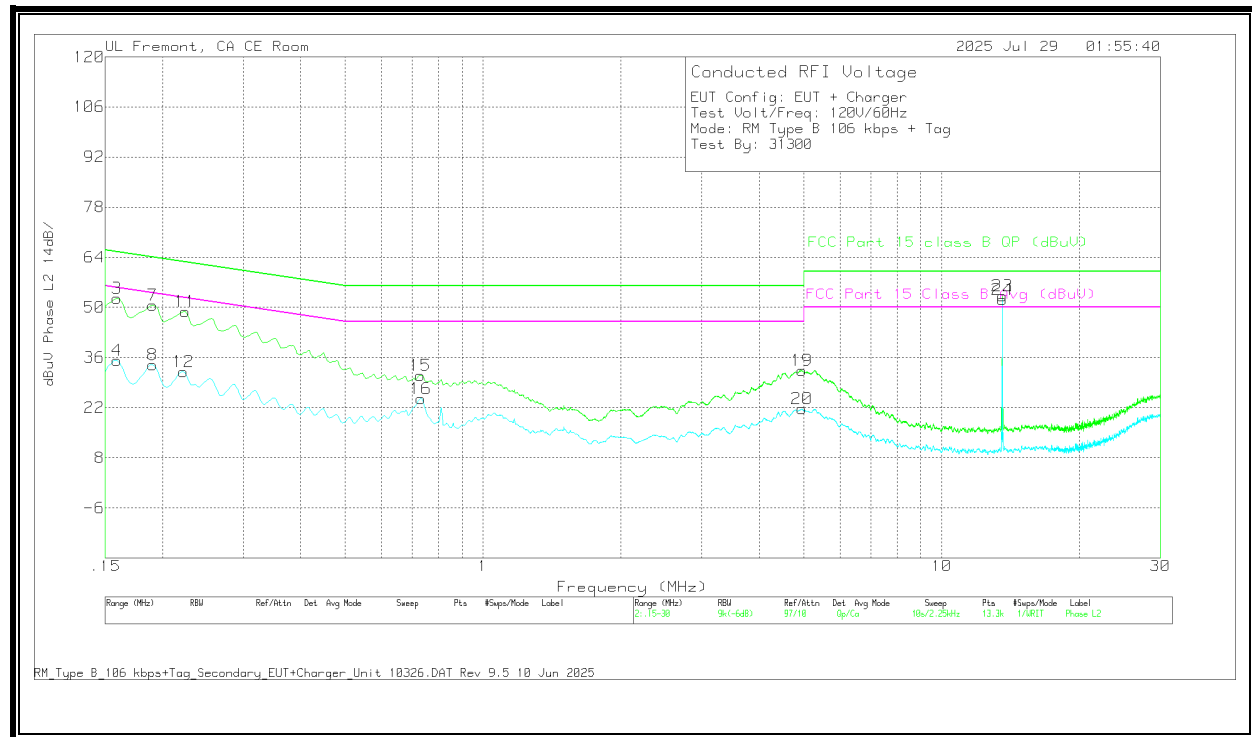
Qp - Quasi-Peak detector
Ca - CISPR average detection

11.2.3. TAG MODE: Type B, 106 Kbps**NORMAL OPERATION with charger and not terminated 106Kbps****LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.159	16.05	Ca	.4	.1	8.5	10	35.05	55.52	-20.47	-	-
6	.1905	14.35	Ca	.2	.1	8.4	10	33.05	54.01	-20.96	-	-
10	.222	12.91	Ca	0	0	8.3	10	31.21	52.74	-21.53	-	-
14	.7305	3.54	Ca	.1	0	8.4	10	22.04	46	-23.96	-	-
18	4.9538	3.19	Ca	.2	0	8.3	10	21.69	46	-24.31	-	-
22	*13.56	31.98	Ca	.2	.1	8.2	10	50.48	50	.48	-	-
1	.159	34.43	Qp	.4	.1	8.5	10	53.43	-	-	65.52	-12.09
5	.1905	32.76	Qp	.2	.1	8.4	10	51.46	-	-	64.01	-12.55
9	.2243	31.28	Qp	0	0	8.3	10	49.58	-	-	62.66	-13.08
13	.7305	14.77	Qp	.1	0	8.4	10	33.27	-	-	56	-22.73
17	4.9448	12.93	Qp	.2	0	8.3	10	31.43	-	-	56	-24.57
21	*13.56	33.37	Qp	.2	.1	8.2	10	51.87	-	-	60	-8.13

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

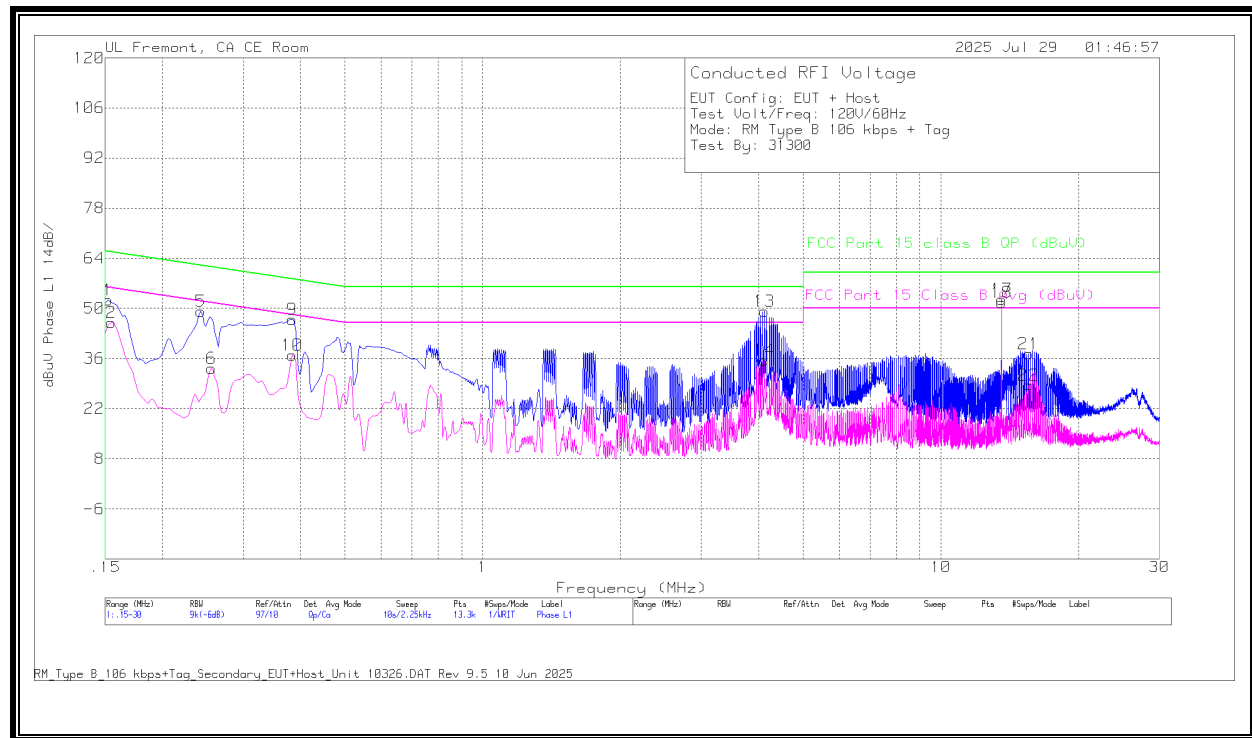
Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.159	16.24	Ca	.4	.1	8.5	10	35.24	55.52	-20.28	-	-
8	.1905	15.37	Ca	.2	0	8.4	10	33.97	54.01	-20.04	-	-
12	.222	13.81	Ca	0	0	8.3	10	32.11	52.74	-20.63	-	-
16	.7328	5.94	Ca	.1	0	8.5	10	24.54	46	-21.46	-	-
20	4.9538	3.13	Ca	.2	0	8.3	10	21.63	46	-24.37	-	-
24	*13.56	33.74	Ca	.2	.1	8.2	10	52.24	50	2.24	-	-
3	.159	33.5	Qp	.4	.1	8.5	10	52.5	-	-	65.52	-13.02
7	.1905	31.98	Qp	.2	0	8.4	10	50.58	-	-	64.01	-13.43
11	.2243	30.55	Qp	0	0	8.3	10	48.85	-	-	62.66	-13.81
15	.7294	12.49	Qp	.1	0	8.4	10	30.99	-	-	56	-25.01
19	4.9628	14.03	Qp	.1	0	8.3	10	32.43	-	-	56	-23.57
23	*13.56	34.78	Qp	.2	.1	8.2	10	53.28	-	-	60	-6.72

Qp - Quasi-Peak detector
 Ca - CISPR average detection
 * Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

NORMAL OPERATION with Host and not terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	26.94	Ca	.5	.1	8.5	10	46.04	55.75	-9.71	-	-
6	.2558	15.23	Ca	-.1	0	8.2	10	33.33	51.57	-18.24	-	-
10	.384	19.17	Ca	-.5	0	8.3	10	36.97	48.19	-11.22	-	-
14	4.119	17.05	Ca	.2	0	8.3	10	35.55	46	-10.45	-	-
18	*13.56	33.16	Ca	.2	.1	8.2	10	51.66	50	1.66	-	-
22	15.5333	9.81	Ca	.3	.1	8.4	10	28.61	50	-21.39	-	-
1	.1523	33.29	Qp	.5	.1	8.5	10	52.39	-	-	65.88	-13.49
5	.2423	31.06	Qp	-.1	0	8.2	10	49.16	-	-	62.02	-12.86
9	.384	29.15	Qp	-.5	0	8.3	10	46.95	-	-	58.19	-11.24
13	4.119	30.76	Qp	.2	0	8.3	10	49.26	-	-	56	-6.74
17	*13.56	34.11	Qp	.2	.1	8.2	10	52.61	-	-	60	-7.39
21	15.5186	18.44	Qp	.3	.1	8.4	10	37.24	-	-	60	-22.76

Qp - Quasi-Peak detector
Ca - CISPR average detection
* Fundamental

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

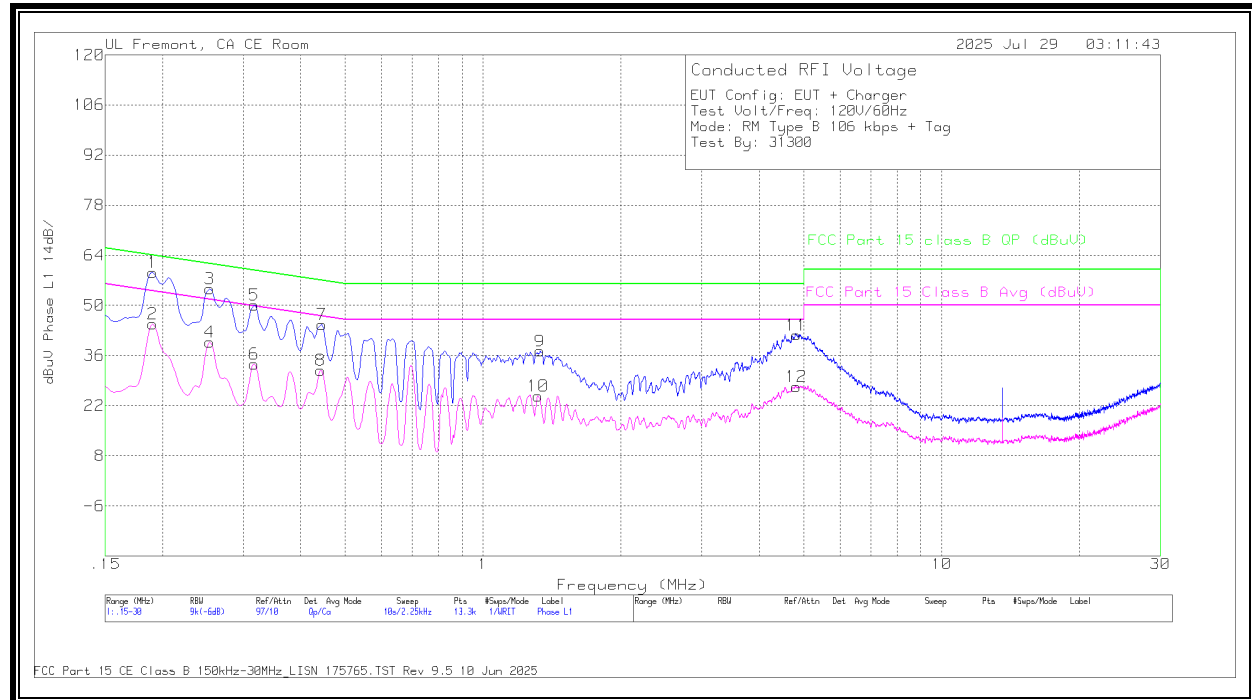
Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1545	23.96	Ca	.5	.1	8.5	10	43.06	55.75	-12.69	-	-
8	.2558	15.63	Ca	-1	0	8.2	10	33.73	51.57	-17.84	-	-
12	.384	19.75	Ca	-5	0	8.3	10	37.55	48.19	-10.64	-	-
16	4.119	16.9	Ca	.2	0	8.3	10	35.4	46	-10.6	-	-
20	*13.56	33.29	Ca	.2	.1	8.2	10	51.79	50	1.79	-	-
24	15.5333	8.24	Ca	.3	.1	8.4	10	27.04	50	-22.96	-	-
3	.1523	30.06	Qp	.5	.1	8.5	10	49.16	-	-	65.88	-16.72
7	.2558	28.98	Qp	-1	0	8.2	10	47.08	-	-	61.57	-14.49
11	.384	29.4	Qp	-5	0	8.3	10	47.2	-	-	58.19	-10.99
15	4.119	30.64	Qp	.2	0	8.3	10	49.14	-	-	56	-6.86
19	*13.56	34.21	Qp	.2	.1	8.2	10	52.71	-	-	60	-7.29
23	15.54	17.62	Qp	.2	.1	8.3	10	36.22	-	-	60	-23.78

Note: 13.56MHz is a fundamental frequency of the EUT. The data under the following section 11.2.4 indicates that when the antenna terminal is terminated, the fundamental amplitude is below the limit line.

11.2.4. TAG MODE: TYPE B, 106 Kbps (ANTENNA PORT TERMINATED)

NORMAL OPERATION with charger and terminated 106Kbps

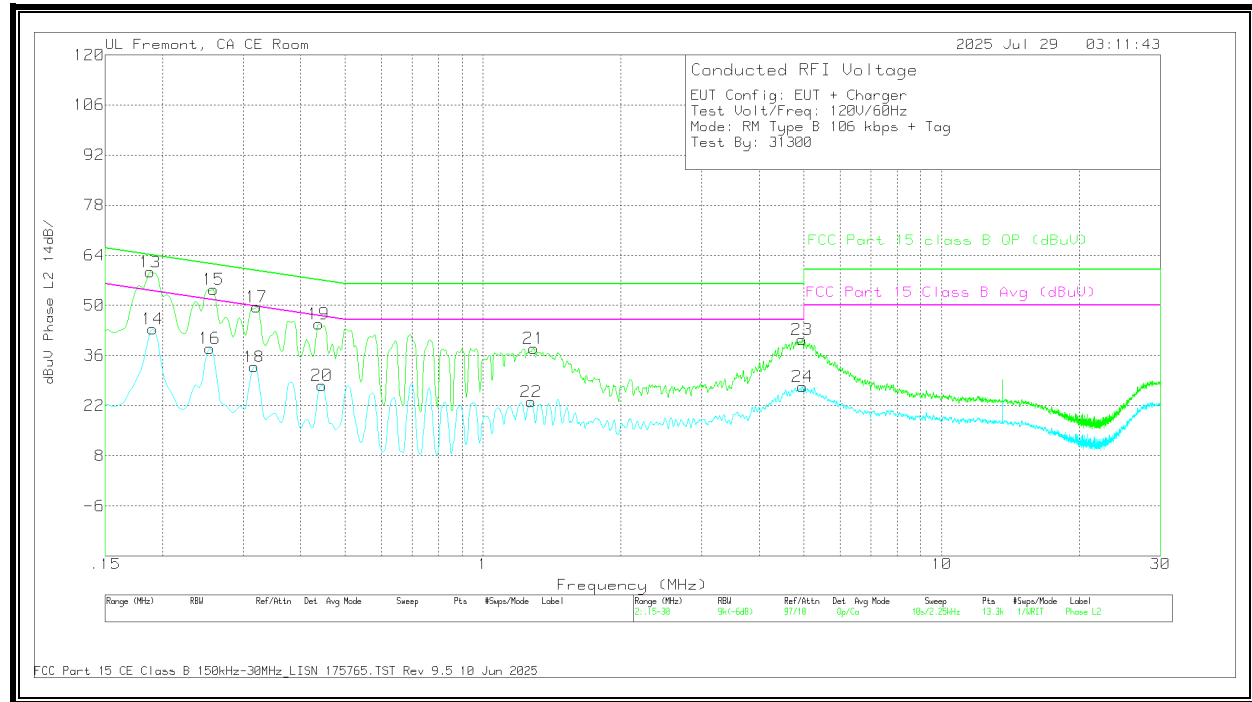
LINE 1 RESULTS



DATA

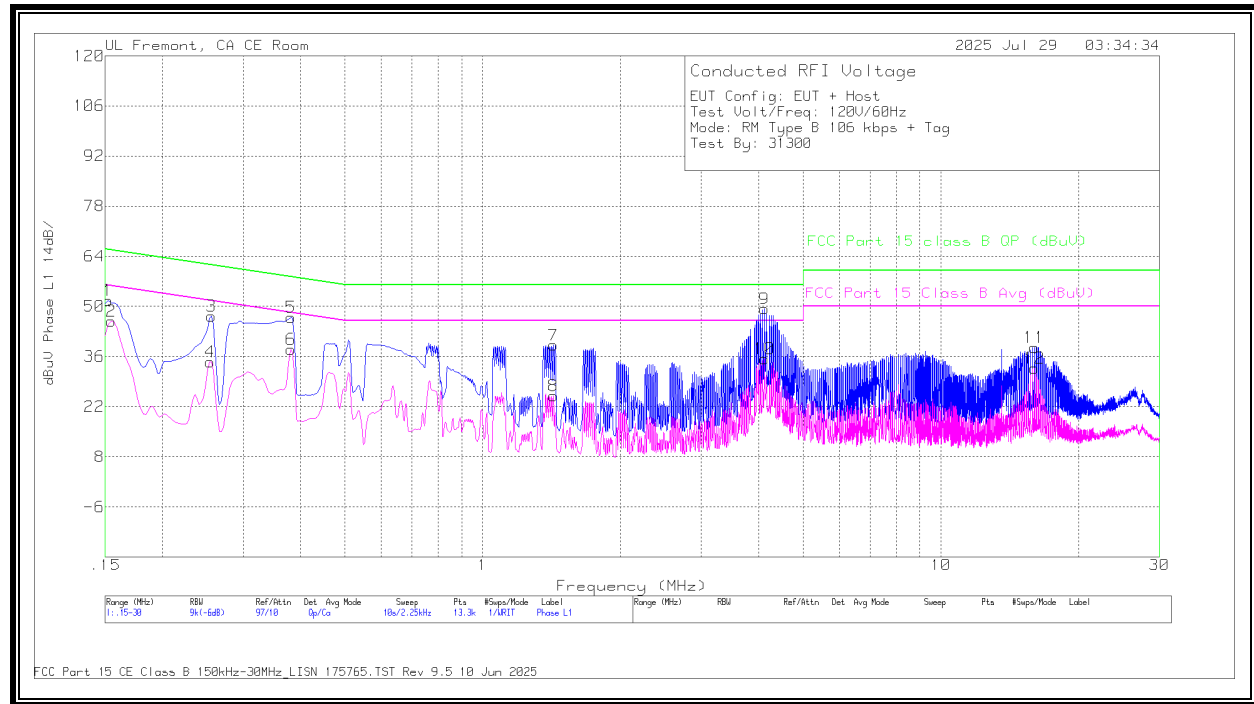
Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1905	26.12	Ca	.2	.1	8.4	10	44.82	54.01	-9.19	-	-
4	.2535	21.62	Ca	-.1	0	8.2	10	39.72	51.64	-11.92	-	-
6	.3165	15.64	Ca	-.1	0	8.1	10	33.64	49.8	-16.16	-	-
8	.4425	12.98	Ca	.1	0	8.8	10	31.88	47.01	-15.13	-	-
10	1.3166	6	Ca	.2	0	8.5	10	24.7	46	-21.3	-	-
12	4.8188	8.87	Ca	.1	0	8.3	10	27.27	46	-18.73	-	-
1	.1905	40.51	Qp	.2	.1	8.4	10	59.21	-	-	64.01	-4.8
3	.2535	36.55	Qp	-.1	0	8.2	10	54.65	-	-	61.64	-6.99
5	.3165	32.11	Qp	-.1	0	8.1	10	50.11	-	-	59.8	-9.69
7	.4448	25.78	Qp	.1	0	8.8	10	44.68	-	-	56.97	-12.29
9	1.3313	18.51	Qp	.2	0	8.5	10	37.21	-	-	56	-18.79
11	4.821	23.35	Qp	.1	0	8.3	10	41.75	-	-	56	-14.25

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1905	24.77	Ca	.2	0	8.4	10	43.37	54.01	-10.64	-	-
16	.2535	19.86	Ca	-.1	0	8.2	10	37.96	51.64	-13.68	-	-
18	.3165	14.83	Ca	-.1	0	8.1	10	32.83	49.8	-16.97	-	-
20	.4448	8.8	Ca	.1	0	8.8	10	27.7	46.97	-19.27	-	-
22	1.275	4.59	Ca	.1	0	8.4	10	23.09	46	-22.91	-	-
24	4.9695	8.96	Ca	.1	0	8.3	10	27.36	46	-18.64	-	-
13	.1883	40.69	Qp	.2	0	8.4	10	59.29	-	-	64.11	-4.82
15	.258	36.3	Qp	-.1	0	8.2	10	54.4	-	-	61.5	-7.1
17	.321	31.6	Qp	-.2	0	8.2	10	49.6	-	-	59.68	-10.08
19	.438	25.98	Qp	0	0	8.8	10	44.78	-	-	57.1	-12.32
21	1.2908	19.35	Qp	.2	0	8.4	10	37.95	-	-	56	-18.05
23	4.965	22.06	Qp	.1	0	8.3	10	40.46	-	-	56	-15.54

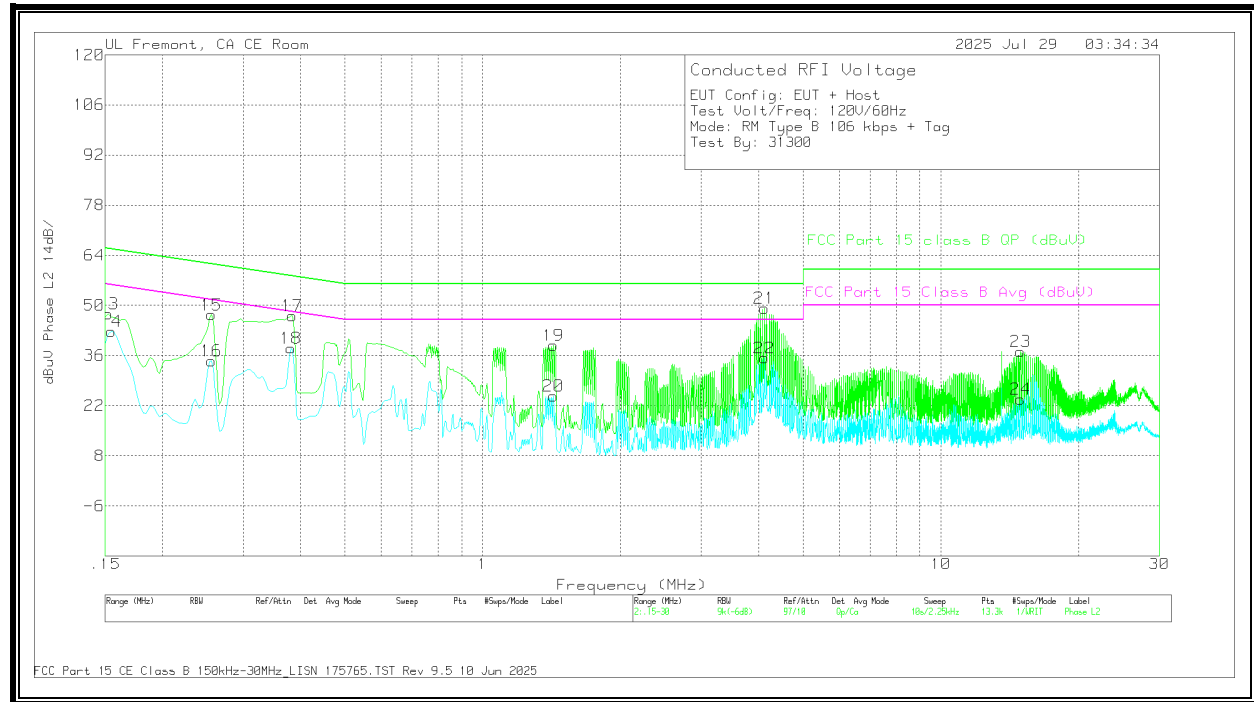
Qp - Quasi-Peak detector
Ca - CISPR average detection

NORMAL OPERATION with Host and terminated, 106Kbps**LINE 1 RESULTS****DATA**

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1545	26.77	Ca	.5	.1	8.5	10	45.87	55.75	-9.88	-	-
4	.2546	16.36	Ca	-.1	0	8.2	10	34.46	51.6	-17.14	-	-
6	.3818	20.19	Ca	-.5	0	8.3	10	37.99	48.24	-10.25	-	-
8	1.4258	6.5	Ca	.1	0	8.4	10	25	46	-21	-	-
10	4.119	16.91	Ca	.2	0	8.3	10	35.41	46	-10.59	-	-
12	16.0013	14.74	Ca	0	.1	7.9	10	32.74	50	-17.26	-	-
1	.1523	32.57	Qp	.5	.1	8.5	10	51.67	-	-	65.88	-14.21
3	.2558	29.2	Qp	-.1	0	8.2	10	47.3	-	-	61.57	-14.27
5	.3818	29.2	Qp	-.5	0	8.3	10	47	-	-	58.24	-11.24
7	1.4258	20.64	Qp	.1	0	8.4	10	39.14	-	-	56	-16.86
9	4.119	30.8	Qp	.2	0	8.3	10	49.3	-	-	56	-6.7
11	16.0013	20.51	Qp	0	.1	7.9	10	38.51	-	-	60	-21.49

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**DATA**

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1545	23.56	Ca	.5	.1	8.5	10	42.66	55.75	-13.09	-	-
16	.2558	16.4	Ca	-.1	0	8.2	10	34.5	51.57	-17.07	-	-
18	.3818	20.27	Ca	-.5	0	8.3	10	38.07	48.24	-10.17	-	-
20	1.4258	6.17	Ca	.1	0	8.4	10	24.67	46	-21.33	-	-
22	4.119	16.78	Ca	.2	0	8.3	10	35.28	46	-10.72	-	-
24	14.937	4.45	Ca	.5	.1	8.7	10	23.75	50	-26.25	-	-
13	.1523	28.49	Qp	.5	.1	8.5	10	47.59	-	-	65.88	-18.29
15	.2558	29.27	Qp	-.1	0	8.2	10	47.37	-	-	61.57	-14.2
17	.384	29.3	Qp	-.5	0	8.3	10	47.1	-	-	58.19	-11.09
19	1.4258	20.3	Qp	.1	0	8.4	10	38.8	-	-	56	-17.2
21	4.119	30.66	Qp	.2	0	8.3	10	49.16	-	-	56	-6.84
23	14.937	17.8	Qp	.5	.1	8.7	10	37.1	-	-	60	-22.9

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 15496277-EP1V1 for setup photos.

13. APPENDIX A – SPOT CHECK EVALUATION

13.1. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3258, A3519, A3520 and A3521.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for FR2 is removed from variants and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3258	BCG-E8947A	579C-E8947A	-With FR2 -No B11/21 -No UL MIMO	eSIM	-
A3519	BCG-E8951A	579C-E8951A	-Without FR2 -Added B11/21 -No UL MIMO	eSIM	A3258
A3520	BCG-E8952A	579C-E8952A	-Without FR2 -No B14, B29, B71, B11/21 -No UL MIMO	eSIM+pSIM	
A3521	BCG-E8953A	579C-E8953A	-Without FR2 -No B14, B29, B71, B11/21, B53 -No UL MIMO, MSS	pSIM+pSIM	

Note:

The spot check plan allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dB} = |V_{dB} - R_{dB}| \quad (1)$$

$$d_{dB} \leq d_{dBmax} \quad (2)$$

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where d_{dB} is deviation between the variant and the reference model, V_{dB} is variant spot check level, R_{dB} is the corresponding reference measurement level, d_{dBmax} is the maximum deviation d_{dB} allowed, and M_{dB} is the margin in dB.

13.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3519

A3519 SPOT CHECK RESULTS								
Equipment Class / Technology	Worst Mode	Test Item	Measured Frequency (MHz)	Original Model: A3258	Sub Model: A3519	Delta (dB or MHz)	Margin	Remarks
				FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8951A IC : 579C-E8951A			
DXX / NFC (FCC/IC)	Operating, PK, Face-On, RM, Type B, 106 kbps	E-field (30m distance) FCC (dBμV/m)	13.5595	28.19	28.65	0.46	-55.35	Note 1
	Operating, PK, Vert., RM, Type B, 106 kbps	Out-Of-Band Emissions (dBuV/m)	38.73	34.75	36.59	1.84	-3.41	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

13.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3520

A3520 SPOT CHECK RESULTS								
Equipment Class / Technology	Worst Mode	Test Item	Measured Frequency (MHz)	Original Model: A3258	Sub Model: A3520	Delta (dB or MHz)	Margin	Remarks
				FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8952A IC : 579C-E8952A			
DXX / NFC (FCC/IC)	Operating, PK, Face-On, RM, Type B, 106 kbps	E-field (30m distance) FCC (dBμV/m)	13.5595	28.19	27.44	-0.75	-56.56	Note 1
	Operating, PK, Vert., RM, Type B, 106 kbps	Out-Of-Band Emissions (dBuV/m)	38.73	34.75	36.29	1.54	-3.71	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

13.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3521

A3521 SPOT CHECK RESULTS								
Equipment Class / Technology	Worst Mode	Test Item	Measured Frequency (MHz)	Original Model: A3258	Sub Model: A3521	Delta (dB or MHz)	Margin	Remarks
				FCC ID : BCG-E8947A IC : 579C-E8947A	FCC ID : BCG-E8953A IC : 579C-E8953A			
DXX / NFC (FCC/IC)	Operating, PK, Face-On, RM, Type B, 106 kbps	E-field (30m distance) FCC (dB μ V/m)	13.5595	28.19	28.85	0.66	-55.15	Note 1
	Operating, PK, Vert., RM, Type B, 106 kbps	Out-Of-Band Emissions (dBuV/m)	38.73	34.75	36.77	2.02	-3.23	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

END OF REPORT