

TEST REPORT

Report Number: 15496277-E10V2 & E11V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3258

Brand : APPLE

FCC ID : BCG-E8947A (Parent)

IC : 579C-E8947A (Parent)

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2025/08/14

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2025/08/09	Initial Review	Everardo H. Torres
V2	2025/08/14	Addressed TCB Feedback in Section 1	Everardo H. Torres

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE	6
1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE	9
1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE	12
1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	15
1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE	19
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	22
1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	25
1.1.8. 802.11be MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	29
1.1.9. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE	35
1.1.10. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE	38
1.1.11. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE	41
1.1.12. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	44
1.1.13. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE	48
1.1.14. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	51
1.1.15. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	54
1.1.16. 802.11be MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	58
1.1.17. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGES	63
1.1.18. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGES	69
1.1.19. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGES	74
1.1.20. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES	80
1.1.21. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGES	88
1.1.22. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES	93
1.1.23. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	99
1.1.24. 802.11be MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	104
1.1.25. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGES	114
1.1.26. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGES	119
1.1.27. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGES	124
1.1.28. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGES	129
1.1.29. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGES	134
1.1.30. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGES	139
1.1.31. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	144
1.1.32. 802.11be MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	148
1.2. <i>WORST CASE BELOW 1 GHz</i>	153
1.3. <i>WORST CASE 18-26 GHz</i>	155
1.4. <i>WORST CASE 26-40 GHz</i>	157
2. AC POWERLINE CONDUCTED EMISSIONS	159
2.1. <i>AC POWER LINE WITH LAPTOP</i>	160
2.2. <i>AC POWER LINE WITH AC/DC ADAPTER</i>	162
3. SETUP PHOTOS	164

1. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b) (1-3) -Un-Restricted bands

RSS 247 Issue 3 Sections

6.2.1.2 (for 5150-5250 MHz band)
6.2.2.2 (for 5250-5350 MHz band)
6.2.3.2 (for 5470-5600 MHz and 5650-5725 MHz bands)
6.2.4.3 (for 5725-5850 MHz band)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz and 1.5 meters above the ground plane for measurement above 1GHz. The distance from the antenna to the EUT is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz, the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with the highest output power as a worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to the 15.209(a) limit.

In addition:

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference purposes only, showing different bandwidths and antenna configurations.

1.1. TRANSMITTER ABOVE 1 GHz

1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6	* 5.148112	54.59	RMS	34.4	-38.34	0	50.65	54	-3.35	-	-	44	136	H
			* 5.14989	70.44	Pk	34.4	-38.33	0	66.51	-	-	74	-7.49	44	136	H
			* 5.15	68.18	Pk	34.4	-38.33	0	64.25	-	-	74	-9.75	44	136	H
			* 5.15	54.5	RMS	34.4	-38.33	0	50.57	54	-3.43	-	-	44	136	H
			* 5.15	68.99	Pk	34.4	-38.33	0	65.06	-	-	74	-8.94	55	132	V
			* 5.149835	70.15	Pk	34.4	-38.33	0	66.22	-	-	74	-7.78	55	132	V
			* 5.15	54.55	RMS	34.4	-38.33	0	50.62	54	-3.38	-	-	55	132	V
			* 5.149973	54.6	RMS	34.4	-38.33	0	50.67	54	-3.33	-	-	55	132	V
		5	* 5.15	68.08	Pk	34.4	-38.33	0	64.15	-	-	74	-9.85	145	101	H
			* 5.147835	70.02	Pk	34.4	-38.34	0	66.08	-	-	74	-7.92	145	101	H
			* 5.15	54.38	RMS	34.4	-38.33	0	50.45	54	-3.55	-	-	145	101	H
			* 5.149335	55.16	RMS	34.4	-38.34	0	51.22	54	-2.78	-	-	145	101	H
			* 5.15	65.61	Pk	34.4	-38.33	0	61.68	-	-	74	-12.32	121	165	V
			* 5.14964	68.17	Pk	34.4	-38.33	0	64.24	-	-	74	-9.76	121	165	V
			* 5.15	52.25	RMS	34.4	-38.33	0	48.32	54	-5.68	-	-	121	165	V
			* 5.149946	53.2	RMS	34.4	-38.33	0	49.27	54	-4.73	-	-	121	165	V
HT40	5190	6	* 5.150	55.29	Pk	34.4	-24.21	0	65.48	-	-	74	-8.52	211	135	H
			* 5.145001	58.41	Pk	34.4	-24.11	0	68.7	-	-	74	-5.3	211	135	H
			* 5.150	38.94	RMS	34.4	-24.21	0	49.13	54	-4.87	-	-	211	135	H
			* 5.149751	40.05	RMS	34.4	-24.21	0	50.24	54	-3.76	-	-	211	135	H
			* 5.150	57.39	Pk	34.4	-24.21	0	67.58	-	-	74	-6.42	223	100	V
			* 5.149446	58.89	Pk	34.4	-24.2	0	69.09	-	-	74	-4.91	223	100	V
			* 5.150	39.26	RMS	34.4	-24.21	0	49.45	54	-4.55	-	-	223	100	V
			* 5.14964	40.91	RMS	34.4	-24.2	0	51.11	54	-2.89	-	-	223	100	V
		5	* 5.15	69.51	Pk	34.4	-38.33	0	65.58	-	-	74	-8.42	329	127	H
			* 5.149918	73.16	Pk	34.4	-38.33	0	69.23	-	-	74	-4.77	329	127	H
			* 5.15	53.5	RMS	34.4	-38.33	0	49.57	54	-4.43	-	-	329	127	H
			* 5.148668	54.53	RMS	34.4	-38.34	0	50.59	54	-3.41	-	-	329	127	H
			* 5.15	68.16	Pk	34.4	-38.33	0	64.23	-	-	74	-9.77	310	194	V
			* 5.144751	68.94	Pk	34.4	-38.36	0	64.98	-	-	74	-9.02	310	194	V
			* 5.15	50.42	RMS	34.4	-38.33	0	46.49	54	-7.51	-	-	310	194	V
			* 5.147223	51.08	RMS	34.4	-38.33	0	47.15	54	-6.85	-	-	310	194	V
VHT80	5210	6	5.147751	55.47	RMS	34.3	-39.29	0	50.48	54	-3.52	-	-	232	129	H
			5.148446	72.99	Pk	34.3	-39.29	0	68	-	-	74	-6	232	129	H
			5.15	71.81	Pk	34.3	-39.25	0	66.86	-	-	74	-7.14	232	129	H
			5.15	53.86	RMS	34.3	-39.25	0	48.91	54	-5.09	-	-	232	129	H
			5.149723	54.75	RMS	34.3	-39.26	0	49.79	54	-4.21	-	-	195	204	V
			5.149807	73.61	Pk	34.3	-39.26	0	68.65	-	-	74	-5.35	195	204	V
			5.15	72.17	Pk	34.3	-39.25	0	67.22	-	-	74	-6.78	195	204	V
			5.15	53.95	RMS	34.3	-39.25	0	49	54	-5	-	-	195	204	V
		5	5.149279	73.91	Pk	34.3	-39.29	0	68.92	-	-	74	-5.08	331	136	H
			5.149918	55.29	RMS	34.3	-39.25	0	50.34	54	-3.66	-	-	331	136	H
			5.15	73.07	Pk	34.3	-39.25	0	68.12	-	-	74	-5.88	331	136	H
			5.15	52.85	RMS	34.3	-39.25	0	47.9	54	-6.1	-	-	331	136	H
			5.14739	52.83	RMS	34.3	-39.29	0	47.84	54	-6.16	-	-	322	211	V
			5.149696	70.14	Pk	34.3	-39.27	0	65.17	-	-	74	-8.83	322	211	V
			5.15	69.65	Pk	34.3	-39.25	0	64.7	-	-	74	-9.3	322	211	V
			5.15	50.88	RMS	34.3	-39.25	0	45.93	54	-8.07	-	-	322	211	V
VHT160	5250 (Lower)	6	5.117056	51.64	RMS	34.3	-39.54	0.11	46.51	54	-7.49	-	-	224	281	H
			5.120362	72.82	Pk	34.3	-39.55	0	67.57	-	-	74	-6.43	224	281	H
			5.15	62.45	Pk	34.3	-39.52	0	57.23	-	-	74	-16.77	224	281	H
			5.15	48.24	RMS	34.3	-39.52	0.11	43.13	54	-10.87	-	-	224	281	H
			5.11889	74.12	Pk	34.3	-39.51	0	68.91	-	-	74	-5.09	206	102	V
			5.122362	52.16	RMS	34.3	-39.5	0.11	47.07	54	-6.93	-	-	206	102	V
			5.15	63.15	Pk	34.3	-39.52	0	57.93	-	-	74	-16.07	206	102	V
			5.15	48.33	RMS	34.3	-39.52	0.11	43.22	54	-10.78	-	-	206	102	V
		5	* 5.15	49.72	Pk	34.5	-24.5	0	59.72	-	-	74	-14.28	269	158	H
			* 5.122223	58.59	Pk	34.4	-24.3	0	68.69	-	-	74	-5.31	269	158	H
			* 5.15	33.01	RMS	34.5	-24.5	0.11	43.12	54	-10.88	-	-	269	158	H
			* 5.123334	37.62	RMS	34.4	-24.3	0.11	47.83	54	-6.17	-	-	269	158	H
			* 5.15	47.32	Pk	34.5	-24.5	0	57.32	-	-	74	-16.68	241	193	V
			* 5.121973	56.45	Pk	34.4	-24.3	0	66.55	-	-	74	-7.45	241	193	V
			* 5.15	31.75	RMS	34.5	-24.5	0.11	41.86	54	-12.14	-	-	241	193	V
			* 5.119445	35.93	RMS	34.4	-24.3	0.11	46.14	54	-7.86	-	-	241	193	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz)

HORIZONTAL RESULT

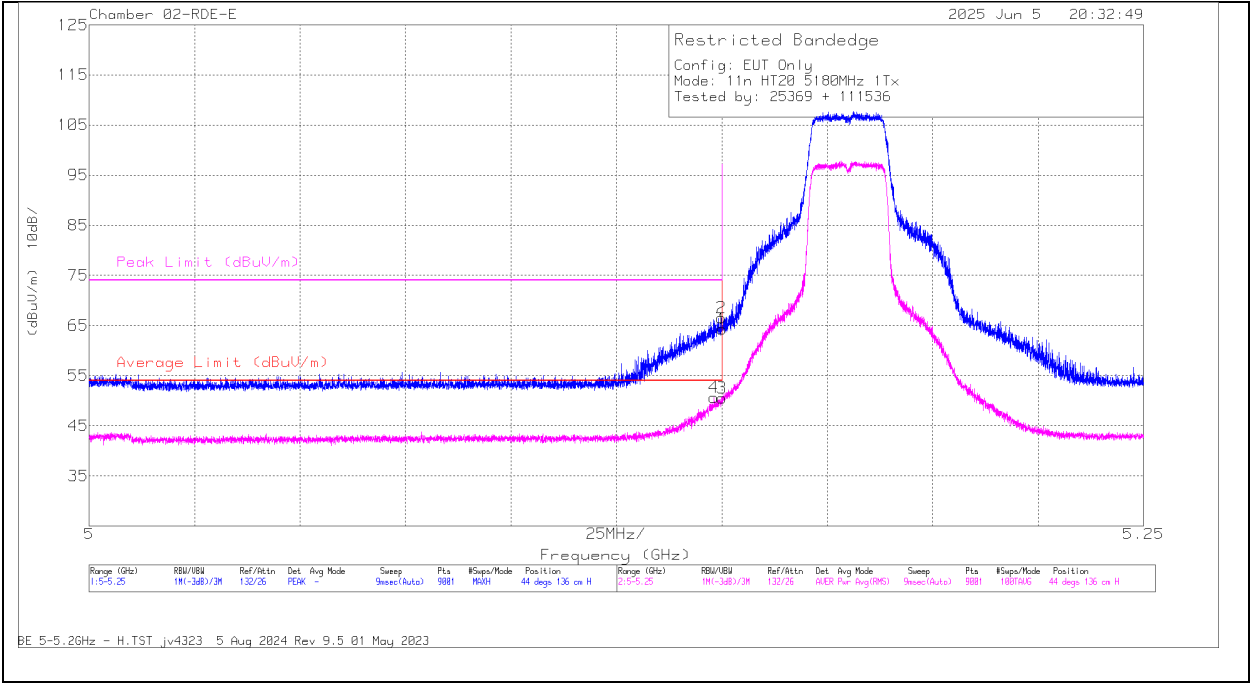


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.148112	54.59	RMS	34.4	0	-38.34	50.65	54	-3.35	-	-	44	136	H
2	* 5.14989	70.44	Pk	34.4	0	-38.33	66.51	-	-	74	-7.49	44	136	H
1	* 5.15	68.18	Pk	34.4	0	-38.33	64.25	-	-	74	-9.75	44	136	H
3	* 5.15	54.5	RMS	34.4	0	-38.33	50.57	54	-3.43	-	-	44	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz)

VERTICAL RESULT

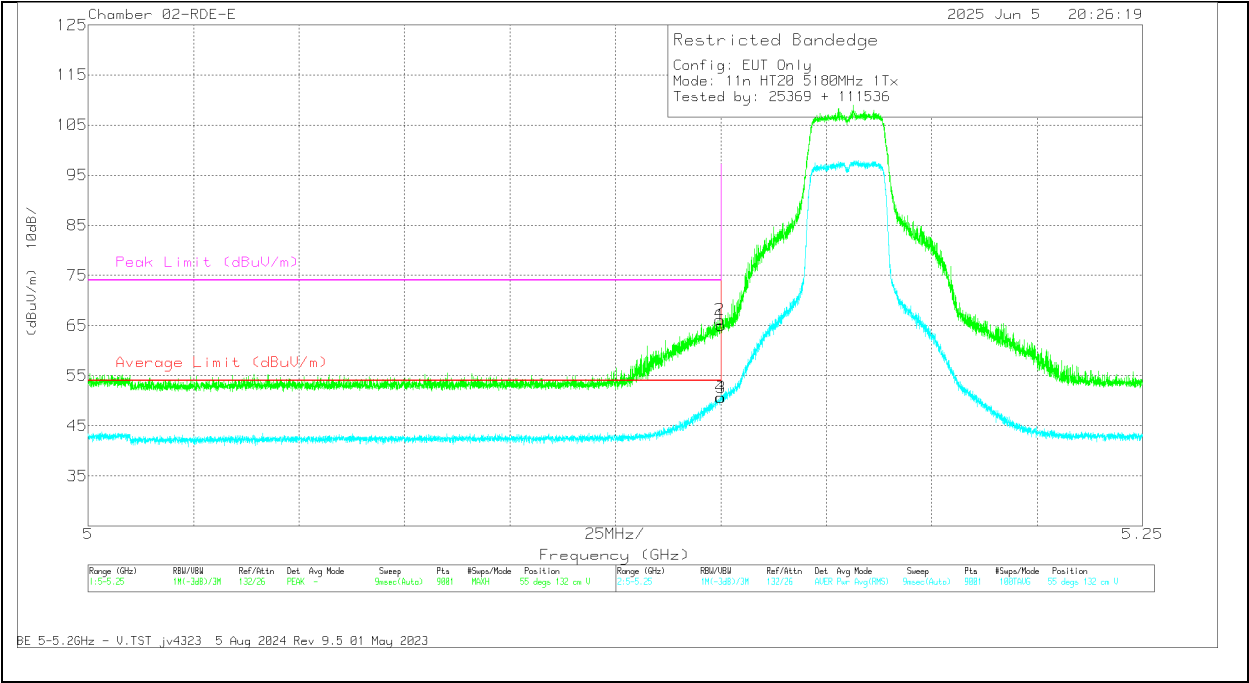

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	68.99	Pk	34.4	0	-38.33	65.06	-	-	74	-8.94	55	132	V
2	* 5.149835	70.15	Pk	34.4	0	-38.33	66.22	-	-	74	-7.78	55	132	V
3	* 5.15	54.55	RMS	34.4	0	-38.33	50.62	54	-3.38	-	-	55	132	V
4	* 5.149973	54.6	RMS	34.4	0	-38.33	50.67	54	-3.33	-	-	55	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection


1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6 + 5	* 5.15	64.86	Pk	34.4	-38.33	0	60.93	-	-	74	-13.07	88	241	H
			* 5.148557	71.86	Pk	34.4	-38.34	0	67.92	-	-	74	-6.08	88	241	H
			* 5.15	51.06	RMS	34.4	-38.33	0	47.13	54	-6.87	-	-	88	241	H
			* 5.14814	55.4	RMS	34.4	-38.34	0	51.46	54	-2.54	-	-	88	241	H
			* 5.15	68.51	Pk	34.4	-38.33	0	64.58	-	-	74	-9.42	62	236	V
			* 5.148723	70.86	Pk	34.4	-38.34	0	66.92	-	-	74	-7.08	62	236	V
			* 5.15	54.95	RMS	34.4	-38.33	0	51.02	54	-2.98	-	-	62	236	V
HT40	5190	6 + 5	* 5.149529	55.3	RMS	34.4	-38.33	0	51.37	54	-2.63	-	-	62	236	V
			5.14814	73.93	Pk	34	-38.61	0	69.32	-	-	74	-4.68	9	112	H
			5.149835	55.5	RMS	34	-38.51	0	50.99	54	-3.01	-	-	9	112	H
			5.15	70.6	Pk	34	-38.51	0	66.09	-	-	74	-7.91	9	112	H
			5.15	54.7	RMS	34	-38.51	0	50.19	54	-3.81	-	-	9	112	H
			5.149223	54.24	RMS	34	-38.53	0	49.71	54	-4.29	-	-	353	110	V
			5.14989	72.44	Pk	34	-38.51	0	67.93	-	-	74	-6.07	353	110	V
VHT80	5210	6 + 5	5.15	67.49	Pk	34	-38.51	0	62.98	-	-	74	-11.02	353	110	V
			5.15	52.59	RMS	34	-38.51	0	48.08	54	-5.92	-	-	353	110	V
			* 5.15	57.84	Pk	34.5	-24.5	0	67.84	-	-	74	-6.16	44	132	H
			* 5.149473	57.88	Pk	34.5	-24.4	0	67.98	-	-	74	-6.02	44	132	H
			* 5.15	40.65	RMS	34.5	-24.5	0	50.65	54	-3.35	-	-	44	132	H
			* 5.14564	40.79	RMS	34.4	-24.4	0	50.79	54	-3.21	-	-	44	132	H
			* 5.15	51.55	Pk	34.5	-24.5	0	61.55	-	-	74	-12.45	135	130	V
VHT160	5250 (Lower)	6 + 5	* 5.147723	58.74	Pk	34.5	-24.4	0	68.84	-	-	74	-5.16	135	130	V
			* 5.15	32.68	RMS	34.5	-24.5	0	42.68	54	-11.32	-	-	135	130	V
			* 5.147307	40.55	RMS	34.4	-24.4	0	50.55	54	-3.45	-	-	135	130	V
			* 5.15	46.55	Pk	34.5	-24.5	0	56.55	-	-	74	-17.45	126	105	H
			* 5.122529	59.35	Pk	34.4	-24.3	0	69.45	-	-	74	-4.55	126	105	H
			* 5.15	30.81	RMS	34.5	-24.5	0.11	40.92	54	-13.08	-	-	126	105	H
			* 5.12839	36.96	RMS	34.4	-24.2	0.11	47.27	54	-6.73	-	-	126	105	H
			* 5.15	41.81	Pk	34.5	-24.5	0	51.81	-	-	74	-22.19	91	101	V
			* 5.122251	59.07	Pk	34.4	-24.3	0	69.17	-	-	74	-4.83	91	101	V
			* 5.15	30.61	RMS	34.5	-24.5	0.11	40.72	54	-13.28	-	-	91	101	V
			* 5.122362	37.71	RMS	34.4	-24.3	0.11	47.92	54	-6.08	-	-	91	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

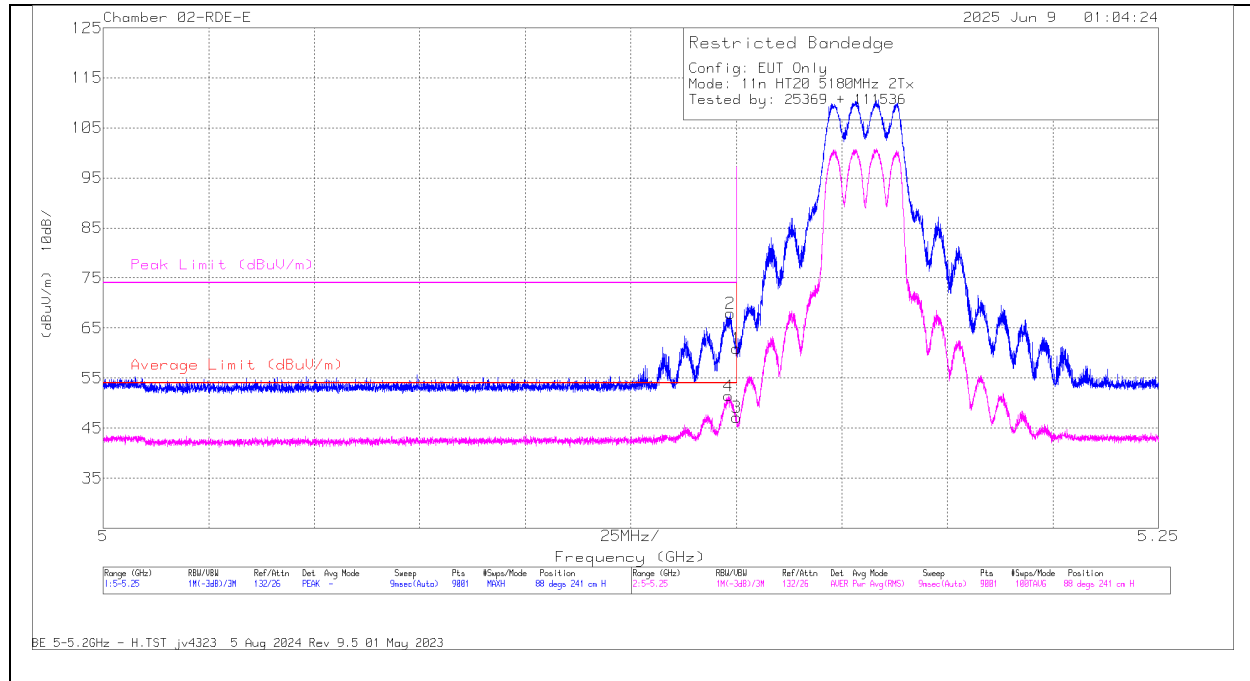
BANDEDGE (LOW CHANNEL / 5180MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	64.86	PK	34.4	0	-38.33	60.93	-	-	74	-13.07	88	241	H
2	* 5.148557	71.86	PK	34.4	0	-38.34	67.92	-	-	74	-6.08	88	241	H
3	* 5.15	51.06	RMS	34.4	0	-38.33	47.13	54	-6.87	-	-	88	241	H
4	* 5.14814	55.4	RMS	34.4	0	-38.34	51.46	54	-2.54	-	-	88	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

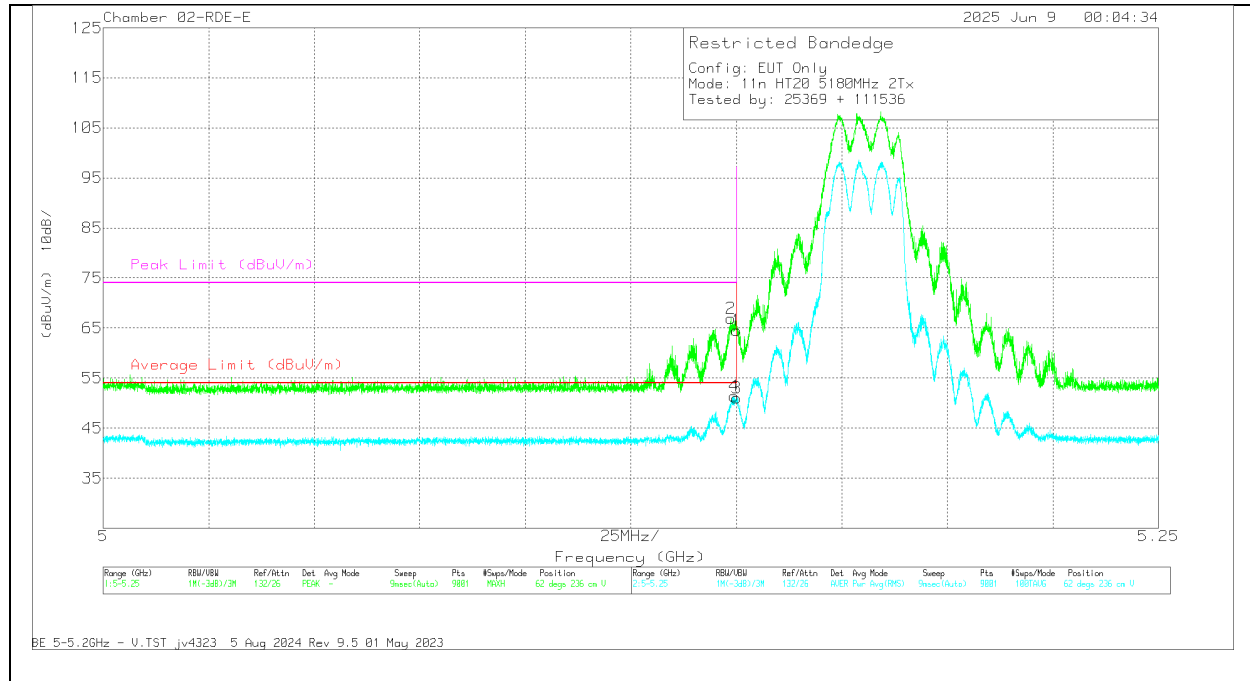BANDEDGE (LOW CHANNEL / 5180MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	68.51	PK	34.4	0	-38.33	64.58	-	-	74	-9.42	62	236	V
2	* 5.148723	70.86	PK	34.4	0	-38.34	66.92	-	-	74	-7.08	62	236	V
3	* 5.15	54.95	RMS	34.4	0	-38.33	51.02	54	-2.98	-	-	62	236	V
4	* 5.149529	55.3	RMS	34.4	0	-38.33	51.37	54	-2.63	-	-	62	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5180	6	* 5.15	55.25	Pk	34.5	-24.5	0	65.25	-	-	74	-8.75	93	101	H
			* 5.148862	57.71	Pk	34.5	-24.4	0	67.81	-	-	74	-6.19	93	101	H
			* 5.15	39.72	RMS	34.5	-24.5	0	49.72	54	-4.28	-	-	93	101	H
			* 5.149529	40.39	RMS	34.5	-24.5	0	50.39	54	-3.61	-	-	93	101	H
			* 5.15	53.66	Pk	34.5	-24.5	0	63.66	-	-	74	-10.34	29	251	V
			* 5.149057	57.06	Pk	34.5	-24.4	0	67.16	-	-	74	-6.84	29	251	V
		5	* 5.15	40.73	RMS	34.5	-24.5	0	50.73	54	-3.27	-	-	29	251	V
			* 5.149973	40.59	RMS	34.5	-24.5	0	50.59	54	-3.41	-	-	29	251	V
			* 5.150	61.05	Pk	34.4	-30.7	0	64.75	-	-	74	-9.25	154	138	H
			* 5.147988	63.3	Pk	34.4	-30.7	0	67	-	-	74	-7	154	138	H
			* 5.150	45.1	RMS	34.4	-30.7	0	48.8	54	-5.2	-	-	154	138	H
			* 5.149644	46.63	RMS	34.4	-30.7	0	50.33	54	-3.67	-	-	154	138	H
			* 5.150	58.33	Pk	34.4	-30.7	0	62.03	-	-	74	-11.97	105	106	V
			* 5.148925	58.95	Pk	34.4	-30.7	0	62.65	-	-	74	-11.35	105	106	V
			* 5.150	43.57	RMS	34.4	-30.7	0	47.27	54	-6.73	-	-	105	106	V
			* 5.1498	44.35	RMS	34.4	-30.7	0	48.05	54	-5.95	-	-	105	106	V
EHT40 (SU Mode)	5190	6	* 5.15	67.79	Pk	34.5	-35.4	0	66.89	-	-	74	-7.11	64	101	H
			* 5.149488	69.88	Pk	34.5	-35.4	0	68.98	-	-	74	-5.02	64	101	H
			* 5.15	49.64	RMS	34.5	-35.4	0	48.74	54	-5.26	-	-	64	101	H
			* 5.148425	50.58	RMS	34.5	-35.4	0	49.68	54	-4.32	-	-	64	101	H
			* 5.15	67.36	Pk	34.5	-35.4	0	66.46	-	-	74	-7.54	77	102	V
			* 5.149175	69.49	Pk	34.5	-35.4	0	68.59	-	-	74	-5.41	77	102	V
		5	* 5.15	48.97	RMS	34.5	-35.4	0	48.07	54	-5.93	-	-	77	102	V
			* 5.149082	50.6	RMS	34.5	-35.4	0	49.7	54	-4.3	-	-	77	102	V
			* 5.15	46.8	Pk	34.1	-17.8	0	63.1	-	-	74	-10.9	230	122	H
			* 5.149644	53.05	Pk	34.1	-17.8	0	69.35	-	-	74	-4.65	230	122	H
			* 5.15	31.06	RMS	34.1	-17.8	0	47.36	54	-6.64	-	-	230	122	H
			* 5.149519	32.39	RMS	34.1	-17.8	0	48.69	54	-5.31	-	-	230	122	H
		5	* 5.15	44.41	Pk	34.1	-17.8	0	60.71	-	-	74	-13.29	187	110	V
			* 5.149894	50.86	Pk	34.1	-17.8	0	67.16	-	-	74	-6.84	187	110	V
			* 5.15	29.96	RMS	34.1	-17.8	0	46.26	54	-7.74	-	-	187	110	V
			* 5.148988	30.84	RMS	34.1	-17.8	0	47.14	54	-6.86	-	-	187	110	V
			* 5.15	48.81	Pk	34.1	-17.8	0	65.11	-	-	74	-8.89	123	205	H
			* 5.144894	50.98	Pk	34.1	-17.8	0	67.28	-	-	74	-6.72	123	205	H
EHT80 (SU Mode)	5210	6	* 5.15	32.97	RMS	34.1	-17.8	0	49.27	54	-4.73	-	-	123	205	H
			* 5.14855	34.22	RMS	34.1	-17.8	0	50.52	54	-3.48	-	-	123	205	H
			* 5.15	47.88	Pk	34.1	-17.8	0	64.18	-	-	74	-9.82	127	112	V
			* 5.141174	50.66	Pk	34.1	-17.8	0	66.96	-	-	74	-7.04	127	112	V
			* 5.15	33.76	RMS	34.1	-17.8	0	50.06	54	-3.94	-	-	127	112	V
			* 5.148707	34.38	RMS	34.1	-17.8	0	50.68	54	-3.32	-	-	127	112	V
		5	* 5.150	62.81	Pk	34.4	-30.7	0	66.51	-	-	74	-7.49	149	115	H
			* 5.145331	64.61	Pk	34.4	-30.7	0	68.31	-	-	74	-5.69	149	115	H
			* 5.150	44.21	RMS	34.4	-30.7	0	47.91	54	-6.09	-	-	149	115	H
			* 5.14755	46.91	RMS	34.4	-30.7	0	50.61	54	-3.39	-	-	149	115	H
			* 5.150	59.3	Pk	34.4	-30.7	0	63	-	-	74	-11	85	182	V
			* 5.145144	62.33	Pk	34.4	-30.7	0	66.03	-	-	74	-7.97	85	182	V
		5	* 5.150	42.78	RMS	34.4	-30.7	0	46.48	54	-7.52	-	-	85	182	V
			* 5.149175	44.6	RMS	34.4	-30.7	0	48.3	54	-5.7	-	-	85	182	V
			* 5.15	53.64	Pk	34.5	-24.5	0	63.64	-	-	74	-10.36	83	178	H
			* 5.145279	58.15	Pk	34.4	-24.4	0	68.15	-	-	74	-5.85	83	178	H
			* 5.15	38.1	RMS	34.5	-24.5	0.14	48.24	54	-5.76	-	-	83	178	H
			* 5.12789	41.1	RMS	34.4	-24.2	0.14	51.44	54	-2.56	-	-	83	178	H
EHT160 (SU Mode)	5250 (Lower)	6	* 5.15	52.52	Pk	34.5	-24.5	0	62.52	-	-	74	-11.48	84	144	V
			* 5.144696	56.02	Pk	34.4	-24.3	0	66.12	-	-	74	-7.88	84	144	V
			* 5.15	37.36	RMS	34.5	-24.5	0.14	47.5	54	-6.5	-	-	84	144	V
			* 5.134807	39.55	RMS	34.4	-24.4	0.14	49.69	54	-4.31	-	-	84	144	V
			* 5.15	54.61	Pk	34.5	-24.5	0	64.61	-	-	74	-9.39	185	103	H
			* 5.145668	58.26	Pk	34.4	-24.4	0	68.26	-	-	74	-5.74	185	103	H
		5	* 5.15	38.43	RMS	34.5	-24.5	0.14	48.57	54	-5.43	-	-	185	103	H
			* 5.128751	41.01	RMS	34.4	-24.2	0.14	51.35	54	-2.65	-	-	185	103	H
			* 5.15	52.59	Pk	34.5	-24.5	0	62.59	-	-	74	-11.41	181	149	V
			* 5.147362	55.6	Pk	34.4	-24.4	0	65.6	-	-	74	-8.4	181	149	V
			* 5.15	36.44	RMS	34.5	-24.5	0.14	46.58	54	-7.42	-	-	181	149	V
			* 5.129307	38.38	RMS	34.4	-24.2	0.14	48.72	54	-5.28	-	-	181	149	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

HORIZONTAL RESULT

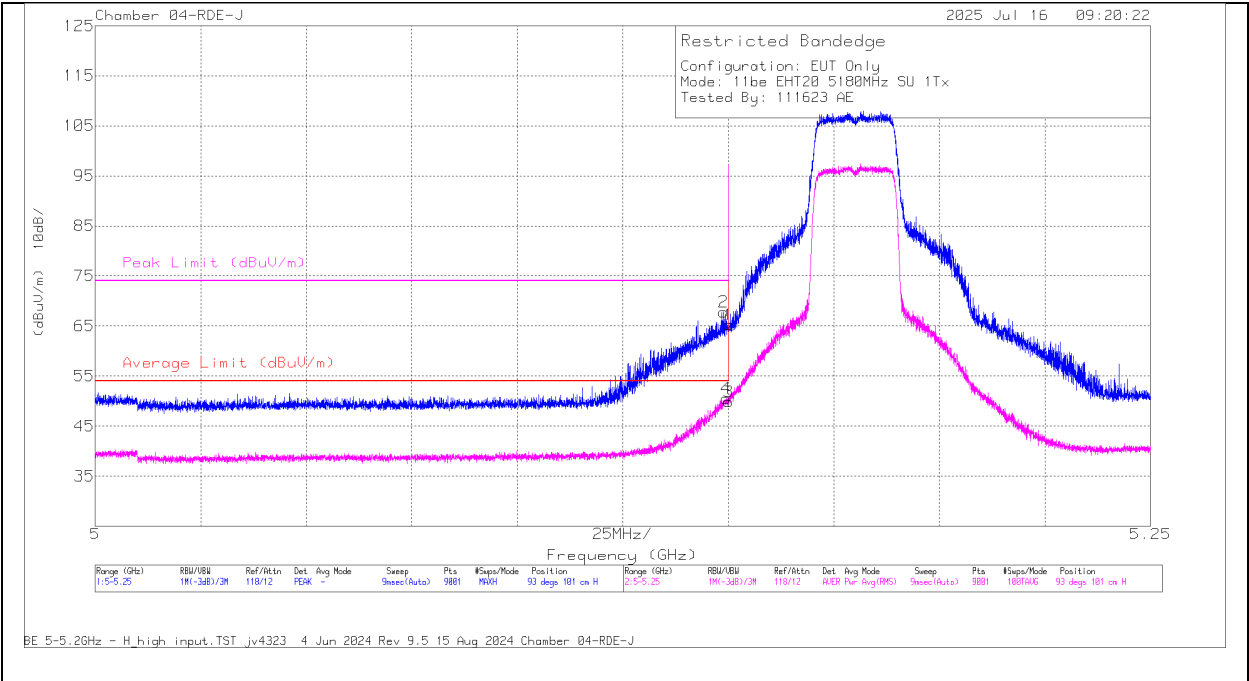


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	55.25	Pk	34.5	-24.5	0	65.25	-	-	74	-8.75	93	101	H
2	* 5.148862	57.71	Pk	34.5	-24.4	0	67.81	-	-	74	-6.19	93	101	H
3	* 5.15	39.72	RMS	34.5	-24.5	0	49.72	54	-4.28	-	-	93	101	H
4	* 5.149529	40.39	RMS	34.5	-24.5	0	50.39	54	-3.61	-	-	93	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

VERTICAL RESULT

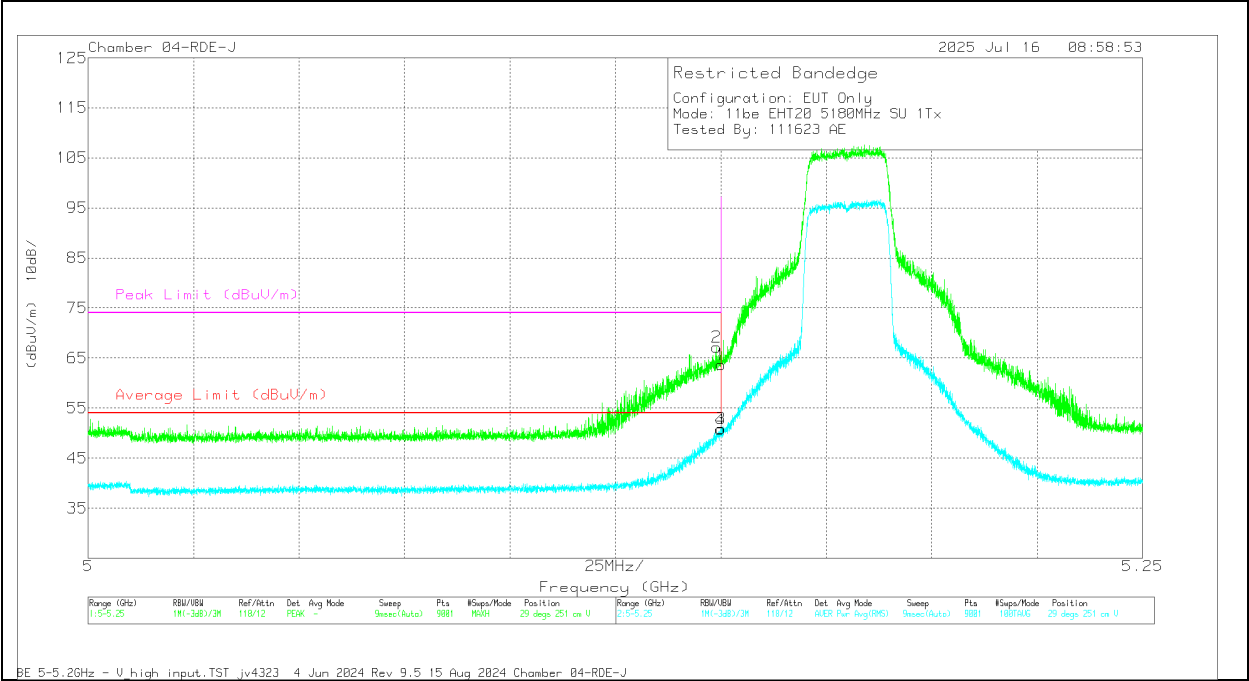

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	53.66	Pk	34.5	-24.5	0	63.66	-	-	74	-10.34	29	251	V
2	* 5.149057	57.06	Pk	34.5	-24.4	0	67.16	-	-	74	-6.84	29	251	V
3	* 5.15	40.73	RMS	34.5	-24.5	0	50.73	54	-3.27	-	-	29	251	V
4	* 5.149973	40.59	RMS	34.5	-24.5	0	50.59	54	-3.41	-	-	29	251	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5180	6	* 5.15	56.4	Pk	34.1	-36.5	0	54	-	-	74	-20	172	191	H
			* 5.148085	60.91	Pk	34.1	-36.51	0	58.5	-	-	74	-15.5	172	191	H
			* 5.15	45.91	RMS	34.1	-36.5	0	43.51	54	-10.49	-	-	172	191	H
			* 5.138112	46.54	RMS	34	-36.41	0	44.13	54	-9.87	-	-	172	191	H
			* 5.15	58.91	Pk	34.1	-36.5	0	56.51	-	-	74	-17.49	149	312	V
			* 5.147668	62.04	Pk	34.1	-36.5	0	59.64	-	-	74	-14.36	149	312	V
		5	* 5.15	45.72	RMS	34.1	-36.5	0	43.32	54	-10.68	-	-	149	312	V
			* 5.148418	46.99	RMS	34.1	-36.54	0	44.55	54	-9.45	-	-	149	312	V
			5.072362	59.74	Pk	34.2	-38.53	0	55.41	-	-	74	-18.59	344	365	H
			5.148918	48.09	RMS	34.3	-38.32	0	44.07	54	-9.93	-	-	344	365	H
			5.15	56.98	Pk	34.3	-38.27	0	53.01	-	-	74	-20.99	344	365	H
			5.15	47.3	RMS	34.3	-38.27	0	43.33	54	-10.67	-	-	344	365	H
			5.124418	61.66	Pk	34.2	-38.26	0	57.6	-	-	74	-16.4	130	382	V
			5.147696	47.88	RMS	34.3	-38.36	0	43.82	54	-10.18	-	-	130	382	V
			5.15	59.32	Pk	34.3	-38.27	0	55.35	-	-	74	-18.65	130	382	V
			5.15	46.34	RMS	34.3	-38.27	0	42.37	54	-11.63	-	-	130	382	V
			* 5.150	50.11	Pk	34.3	-23.47	0	60.94	-	-	74	-13.06	206	118	H
			* 5.14864	51.57	Pk	34.3	-23.47	0	62.4	-	-	74	-11.6	206	118	H
			* 5.150	35.06	RMS	34.3	-23.47	0	45.89	54	-8.11	-	-	206	118	H
			* 5.149862	35.62	RMS	34.3	-23.46	0	46.46	54	-7.54	-	-	206	118	H
			* 5.150	53.57	Pk	34.3	-23.47	0	64.4	-	-	74	-9.6	181	365	V
EHT40 (242T / Index 61)	5190	6	* 5.149973	56.65	Pk	34.3	-23.47	0	67.48	-	-	74	-6.52	181	365	V
			* 5.150	38.72	RMS	34.3	-23.47	0	49.55	54	-4.45	-	-	181	365	V
			* 5.148696	39.47	RMS	34.3	-23.45	0	50.32	54	-3.68	-	-	181	365	V
		5	5.148501	67.61	Pk	34.3	-38.33	0	63.58	-	-	74	-10.42	95	230	H
			5.149918	51.17	RMS	34.3	-38.27	0	47.2	54	-6.8	-	-	95	230	H
			5.15	66.21	Pk	34.3	-38.27	0	62.24	-	-	74	-11.76	95	230	H
			5.15	50.91	RMS	34.3	-38.27	0	46.94	54	-7.06	-	-	95	230	H
			5.149696	63.25	Pk	34.3	-38.29	0	59.26	-	-	74	-14.74	51	320	V
			5.149779	49.14	RMS	34.3	-38.28	0	45.16	54	-8.84	-	-	51	320	V
			5.15	61.13	Pk	34.3	-38.27	0	57.16	-	-	74	-16.84	51	320	V
			5.15	48.27	RMS	34.3	-38.27	0	44.3	54	-9.7	-	-	51	320	V
		6	* 5.150	44.31	Pk	34.3	-23.47	0	55.14	-	-	74	-18.86	218	103	H
			* 5.149862	45.08	Pk	34.3	-23.46	0	55.92	-	-	74	-18.08	218	103	H
			* 5.150	28.91	RMS	34.3	-23.47	0.17	39.91	54	-14.09	-	-	218	103	H
			* 5.007472	30.79	RMS	34.4	-23.91	0.17	41.45	54	-12.55	-	-	218	103	H
			* 5.150	45.71	Pk	34.3	-23.47	0	56.54	-	-	74	-17.46	228	105	V
			* 5.149223	47.05	Pk	34.3	-23.41	0	57.94	-	-	74	-16.06	228	105	V
			* 5.150	29.7	RMS	34.3	-23.47	0.17	40.7	54	-13.3	-	-	228	105	V
			* 5.008528	30.69	RMS	34.3	-23.91	0.17	41.25	54	-12.75	-	-	228	105	V
EHT40 (52T / Index 37)	5190	5	5.112695	60.09	Pk	34.2	-38.61	0	55.68	-	-	74	-18.32	221	138	H
			5.146307	47.81	RMS	34.3	-38.4	0.17	43.88	54	-10.12	-	-	221	138	H
			5.15	58.21	Pk	34.3	-38.27	0	54.24	-	-	74	-19.76	221	138	H
			5.15	46.52	RMS	34.3	-38.27	0.17	42.72	54	-11.28	-	-	221	138	H
			5.12389	47.95	RMS	34.2	-38.26	0.17	44.06	54	-9.94	-	-	150	276	V
			5.125112	60.44	Pk	34.2	-38.26	0	56.38	-	-	74	-17.62	150	276	V
		6	5.15	58.24	Pk	34.3	-38.27	0	54.27	-	-	74	-19.73	150	276	V
			5.15	46.45	RMS	34.3	-38.27	0.17	42.65	54	-11.35	-	-	150	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT 80 (242T / Index 61)	5210	6	* 5.15	64.22	Pk	34.1	-36.5	0	61.82	-	-	74	-12.18	180	110	H
			* 5.148696	66.33	Pk	34.1	-36.57	0	63.86	-	-	74	-10.14	180	110	H
			* 5.15	50.4	RMS	34.1	-36.5	0	48	54	-6	-	-	180	110	H
			* 5.149696	50.68	RMS	34.1	-36.53	0	48.25	54	-5.75	-	-	180	110	H
			* 5.15	65.74	Pk	34.1	-36.5	0	63.34	-	-	74	-10.66	119	317	V
			* 5.146751	66.63	Pk	34.1	-36.5	0	64.23	-	-	74	-9.77	119	317	V
		5	* 5.15	51.21	RMS	34.1	-36.5	0	48.81	54	-5.19	-	-	119	317	V
			* 5.149835	51.57	RMS	34.1	-36.52	0	49.15	54	-4.85	-	-	119	317	V
			* 5.150	61.93	Pk	34.3	-36.52	0	59.71	-	-	74	-14.29	40	398	H
			* 5.147723	63.68	Pk	34.3	-36.6	0	61.38	-	-	74	-12.62	40	398	H
			* 5.150	47.49	RMS	34.3	-36.52	0	45.27	54	-8.73	-	-	40	398	H
			* 5.149585	48.2	RMS	34.3	-36.47	0	46.03	54	-7.97	-	-	40	398	H
			* 5.150	61.09	Pk	34.3	-36.52	0	58.87	-	-	74	-15.13	25	216	V
			* 5.148668	63.74	Pk	34.3	-36.47	0	61.57	-	-	74	-12.43	25	216	V
			* 5.150	47.28	RMS	34.3	-36.52	0	45.06	54	-8.94	-	-	25	216	V
			* 5.149862	48.36	RMS	34.3	-36.5	0	46.16	54	-7.84	-	-	25	216	V
EHT 80 (52T / Index 37)	5210	6	* 5.15	60.5	Pk	34.1	-36.5	0	58.1	-	-	74	-15.9	341	191	H
			* 5.148862	62.27	Pk	34.1	-36.59	0	59.78	-	-	74	-14.22	341	191	H
			* 5.15	45.71	RMS	34.1	-36.5	0.16	43.47	54	-10.53	-	-	341	191	H
			* 5.143668	46.55	RMS	34.1	-36.4	0.16	44.41	54	-9.59	-	-	341	191	H
			* 5.15	60.03	Pk	34.1	-36.5	0	57.63	-	-	74	-16.37	305	333	V
			* 5.148251	62.36	Pk	34.1	-36.53	0	59.93	-	-	74	-14.07	305	333	V
		5	* 5.15	45.51	RMS	34.1	-36.5	0.16	43.27	54	-10.73	-	-	305	333	V
			* 5.13614	46.64	RMS	34	-36.5	0.16	44.3	54	-9.7	-	-	305	333	V
			* 5.150	62.76	Pk	34.3	-36.52	0	60.54	-	-	74	-13.46	38	178	H
			* 5.149973	62.73	Pk	34.3	-36.52	0	60.51	-	-	74	-13.49	38	178	H
			* 5.150	45.72	RMS	34.3	-36.52	0.16	43.66	54	-10.34	-	-	38	178	H
			* 5.104723	46.33	RMS	34.4	-36.64	0.16	44.25	54	-9.75	-	-	38	178	H
			* 5.150	60.11	Pk	34.3	-36.52	0	57.89	-	-	74	-16.11	5	397	V
			* 5.147057	62.2	Pk	34.3	-36.6	0	59.9	-	-	74	-14.1	5	397	V
			* 5.150	45.65	RMS	34.3	-36.52	0.16	43.59	54	-10.41	-	-	5	397	V
			* 5.008945	47.1	RMS	34.3	-36.87	0.16	44.69	54	-9.31	-	-	5	397	V
EHT160 (242T / Index 61)	5250 (Lower)	6	* 5.15	58.11	Pk	34.2	-38.4	0	53.91	-	-	74	-20.09	241	167	H
			* 5.147196	60.46	Pk	34.2	-38.42	0	56.24	-	-	74	-17.76	241	167	H
			* 5.15	46.54	RMS	34.2	-38.4	0.1	42.44	54	-11.56	-	-	241	167	H
			* 5.0035	47.73	RMS	34	-38.55	0.1	43.28	54	-10.72	-	-	241	167	H
			* 5.15	66.04	Pk	34.2	-38.4	0	61.84	-	-	74	-12.16	241	358	V
			* 5.138807	68.02	Pk	34.2	-38.4	0	63.82	-	-	74	-10.18	241	358	V
		5	* 5.15	55.09	RMS	34.2	-38.4	0.1	50.99	54	-3.01	-	-	241	358	V
			* 5.149835	55.39	RMS	34.2	-38.4	0.1	51.29	54	-2.71	-	-	241	358	V
			* 5.150	56.1	Pk	34.3	-36.52	0	53.88	-	-	74	-20.12	80	303	H
			* 5.103473	58.51	Pk	34.4	-36.68	0	56.23	-	-	74	-17.77	80	303	H
			* 5.150	44.81	RMS	34.3	-36.52	0.1	42.69	54	-11.21	-	-	80	303	H
			* 5.003139	46.91	RMS	34.4	-36.92	0.1	44.49	54	-9.41	-	-	80	303	H
			* 5.150	55.36	Pk	34.3	-36.52	0	53.14	-	-	74	-20.86	298	208	V
			* 5.049862	58.45	Pk	34.3	-36.53	0	56.22	-	-	74	-17.78	298	208	V
			* 5.150	44.98	RMS	34.3	-36.52	0.1	42.86	54	-11.14	-	-	298	208	V
			* 5.102251	46.42	RMS	34.4	-36.7	0.1	44.22	54	-9.78	-	-	298	208	V
EHT160 (52T / Index 37)	5250 (Lower)	6	* 5.146723	48.43	RMS	34.3	-39.29	0.2	43.64	54	-10.36	-	-	52	254	H
			* 5.149612	64.25	Pk	34.3	-39.27	0	59.28	-	-	74	-14.72	52	254	H
			* 5.15	60.37	Pk	34.3	-39.25	0	55.42	-	-	74	-18.58	52	254	H
			* 5.15	47.31	RMS	34.3	-39.25	0.2	42.56	54	-11.44	-	-	52	254	H
			* 5.144973	48.42	RMS	34.3	-39.26	0.2	43.66	54	-10.34	-	-	26	257	V
			* 5.149946	63.63	Pk	34.3	-39.25	0	58.68	-	-	74	-15.32	26	257	V
		5	* 5.15	61.35	Pk	34.3	-39.25	0	56.4	-	-	74	-17.6	26	257	V
			* 5.15	46.7	RMS	34.3	-39.25	0.2	41.95	54	-12.05	-	-	26	257	V
			* 5.15	56.3	Pk	34.4	-37.58	0	53.12	-	-	74	-20.88	34	140	H
			* 5.008639	59.84	Pk	34.4	-37.74	0	56.5	-	-	74	-17.5	34	140	H
			* 5.15	45.53	RMS	34.4	-37.58	0.2	42.55	54	-11.45	-	-	34	140	H
			* 5.138501	47	RMS	34.4	-37.57	0.2	44.03	54	-9.97	-	-	34	140	H
			* 5.15	55.73	Pk	34.4	-37.58	0	52.55	-	-	74	-21.45	88	212	V
			* 5.039167	59.01	Pk	34.4	-37.7	0	55.71	-	-	74	-18.29	88	212	V
			* 5.15	45.46	RMS	34.4	-37.58	0.2	42.48	54	-11.52	-	-	88	212	V
			* 5.050862	47.13	RMS	34.4	-37.64	0.2	44.09	54	-9.91	-	-	88	212	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

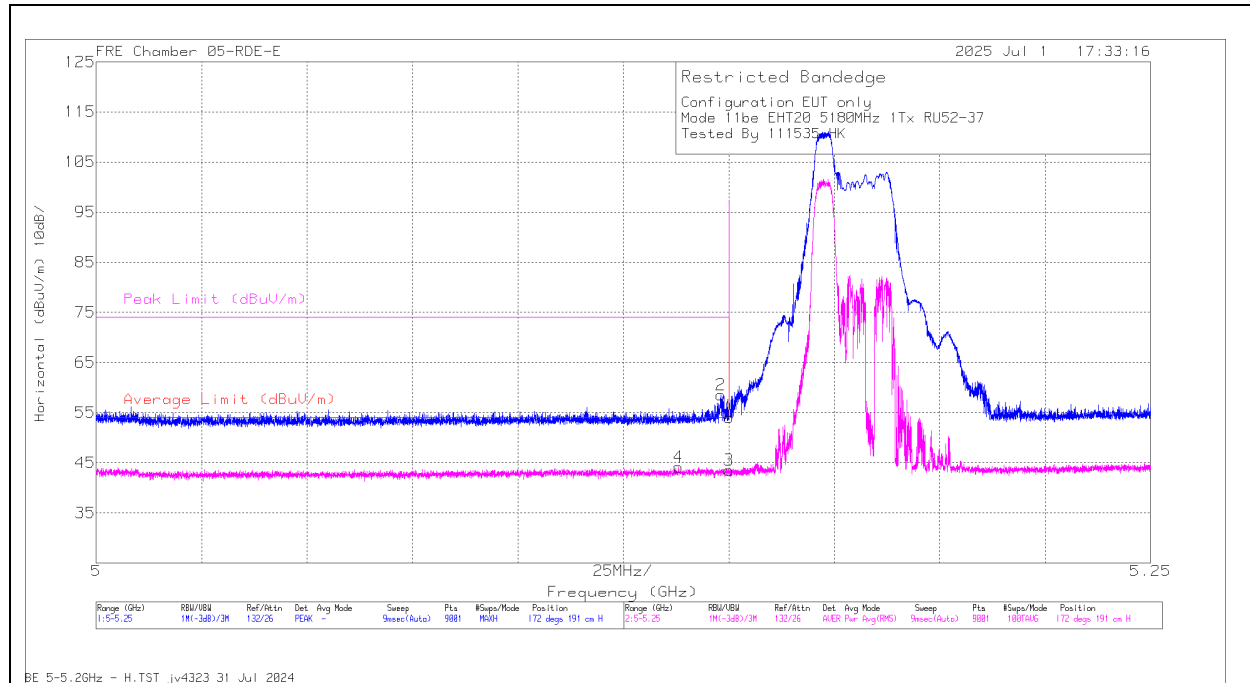BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	56.4	Pk	34.1	0	-36.5	54	-	-	74	-20	172	191	H
2	* 5.148085	60.91	Pk	34.1	0	-36.51	58.5	-	-	74	-15.5	172	191	H
3	* 5.15	45.91	RMS	34.1	0	-36.5	43.51	54	-10.49	-	-	172	191	H
4	* 5.138112	46.54	RMS	34	0	-36.41	44.13	54	-9.87	-	-	172	191	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52

VERTICAL RESULT

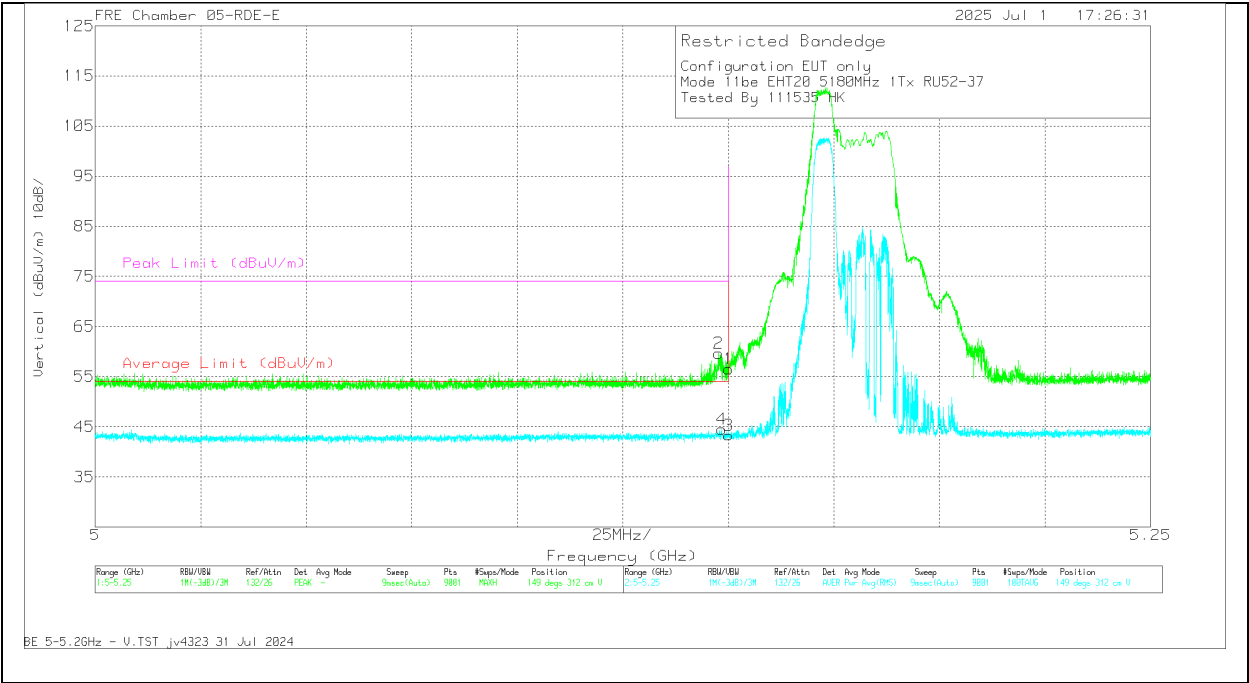

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	58.91	Pk	34.1	0	-36.5	56.51	-	-	74	-17.49	149	312	V
2	* 5.147668	62.04	Pk	34.1	0	-36.5	59.64	-	-	74	-14.36	149	312	V
3	* 5.15	45.72	RMS	34.1	0	-36.5	43.32	54	-10.68	-	-	149	312	V
4	* 5.148418	46.99	RMS	34.1	0	-36.54	44.55	54	-9.45	-	-	149	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5180	6 + 5	* 5.15	53.64	Pk	34.5	-24.5	0	63.64	-	-	74	-10.36	186	145	H
			* 5.14964	56.94	Pk	34.5	-24.5	0	66.94	-	-	74	-7.06	186	145	H
			* 5.15	39.73	RMS	34.5	-24.5	0	49.73	54	-4.27	-	-	186	145	H
			* 5.149362	40.31	RMS	34.5	-24.4	0	50.41	54	-3.59	-	-	186	145	H
			* 5.15	54.52	Pk	34.5	-24.5	0	64.52	-	-	74	-9.48	65	279	V
			* 5.14939	56.89	Pk	34.5	-24.4	0	66.99	-	-	74	-7.01	65	279	V
			* 5.15	40.07	RMS	34.5	-24.5	0	50.07	54	-3.93	-	-	65	279	V
			* 5.149973	40.73	RMS	34.5	-24.5	0	50.73	54	-3.27	-	-	65	279	V
EHT40 (SU Mode)	5190	6 + 5	* 5.15	43.64	Pk	34.1	-17.8	0	59.94	-	-	74	-14.06	163	140	H
			* 5.148081	52.88	Pk	34.1	-17.8	0	69.18	-	-	74	-4.82	163	140	H
			* 5.15	28.74	RMS	34.1	-17.8	0	45.04	54	-8.96	-	-	163	140	H
			* 5.147925	32.22	RMS	34.1	-17.8	0	48.52	54	-5.48	-	-	163	140	H
			* 5.15	41.28	Pk	34.1	-17.8	0	57.58	-	-	74	-16.42	126	244	V
			* 5.146175	49.11	Pk	34.1	-17.8	0	65.41	-	-	74	-8.59	126	244	V
			* 5.15	28.64	RMS	34.1	-17.8	0	44.94	54	-9.06	-	-	126	244	V
			* 5.147456	31.36	RMS	34.1	-17.8	0	47.66	54	-6.34	-	-	126	244	V
EHT80 (SU Mode)	5210	6 + 5	* 5.15	49.24	Pk	34.5	-24.5	0	59.24	-	-	74	-14.76	215	109	H
			* 5.147279	58.77	Pk	34.4	-24.4	0	68.77	-	-	74	-5.23	215	109	H
			* 5.15	32.88	RMS	34.5	-24.5	0	42.88	54	-11.12	-	-	215	109	H
			* 5.146862	40.78	RMS	34.4	-24.4	0	50.78	54	-3.22	-	-	215	109	H
			* 5.15	54.01	Pk	34.5	-24.5	0	64.01	-	-	74	-9.99	188	106	V
			* 5.147779	59.1	Pk	34.5	-24.4	0	69.2	-	-	74	-4.8	188	106	V
			* 5.15	36.02	RMS	34.5	-24.5	0	46.02	54	-7.98	-	-	188	106	V
			* 5.142918	41.04	RMS	34.4	-24.3	0	51.14	54	-2.86	-	-	188	106	V
EHT160 (SU Mode)	5250 (Lower)	6 + 5	* 5.15	47.84	Pk	34.5	-24.5	0	57.84	-	-	74	-16.16	217	138	H
			* 5.14764	57.68	Pk	34.5	-24.4	0	67.78	-	-	74	-6.22	217	138	H
			* 5.15	32.83	RMS	34.5	-24.5	0.14	42.97	54	-11.03	-	-	217	138	H
			* 5.137612	40.39	RMS	34.4	-24.3	0.14	50.63	54	-3.37	-	-	217	138	H
			* 5.15	49.26	Pk	34.5	-24.5	0	59.26	-	-	74	-14.74	180	104	V
			* 5.143196	57.27	Pk	34.4	-24.3	0	67.37	-	-	74	-6.63	180	104	V
			* 5.15	34.11	RMS	34.5	-24.5	0.14	44.25	54	-9.75	-	-	180	104	V
			* 5.127584	39.94	RMS	34.4	-24.2	0.14	50.28	54	-3.72	-	-	180	104	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

HORIZONTAL RESULT

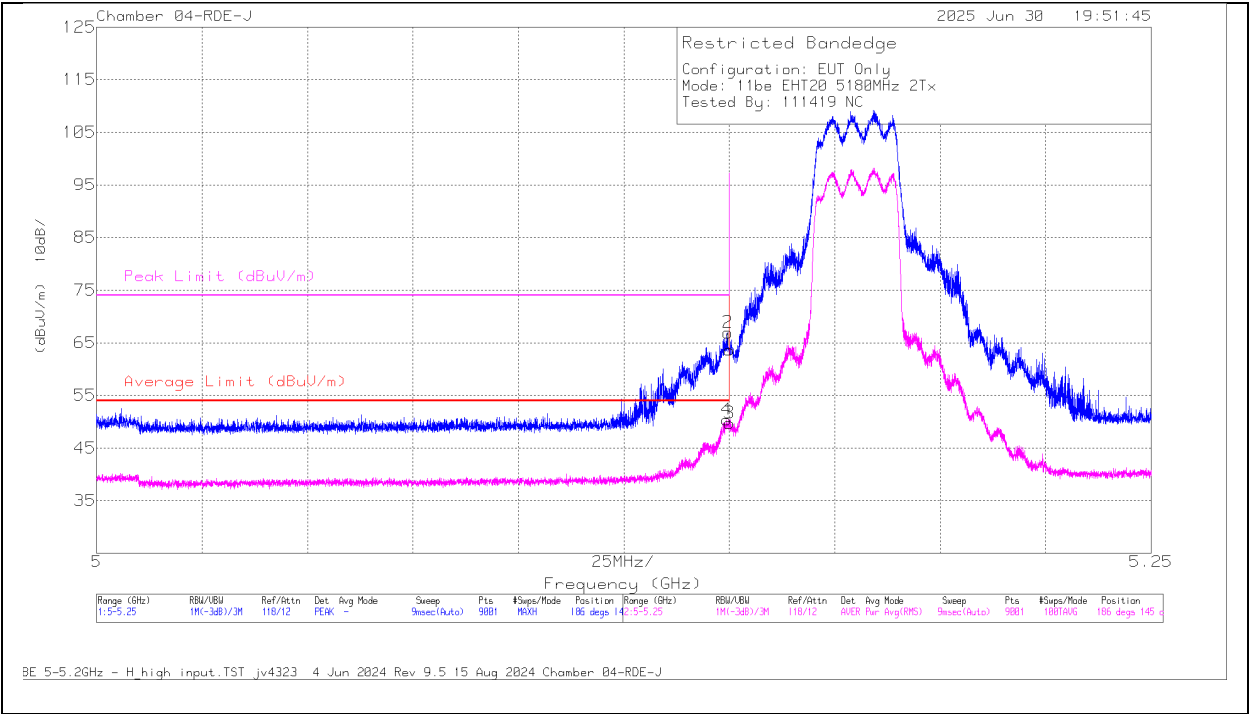


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	53.64	Pk	34.5	-24.5	0	63.64	-	-	74	-10.36	186	145	H
2	* 5.14964	56.94	Pk	34.5	-24.5	0	66.94	-	-	74	-7.06	186	145	H
3	* 5.15	39.73	RMS	34.5	-24.5	0	49.73	54	-4.27	-	-	186	145	H
4	* 5.149362	40.31	RMS	34.5	-24.4	0	50.41	54	-3.59	-	-	186	145	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

VERTICAL RESULT

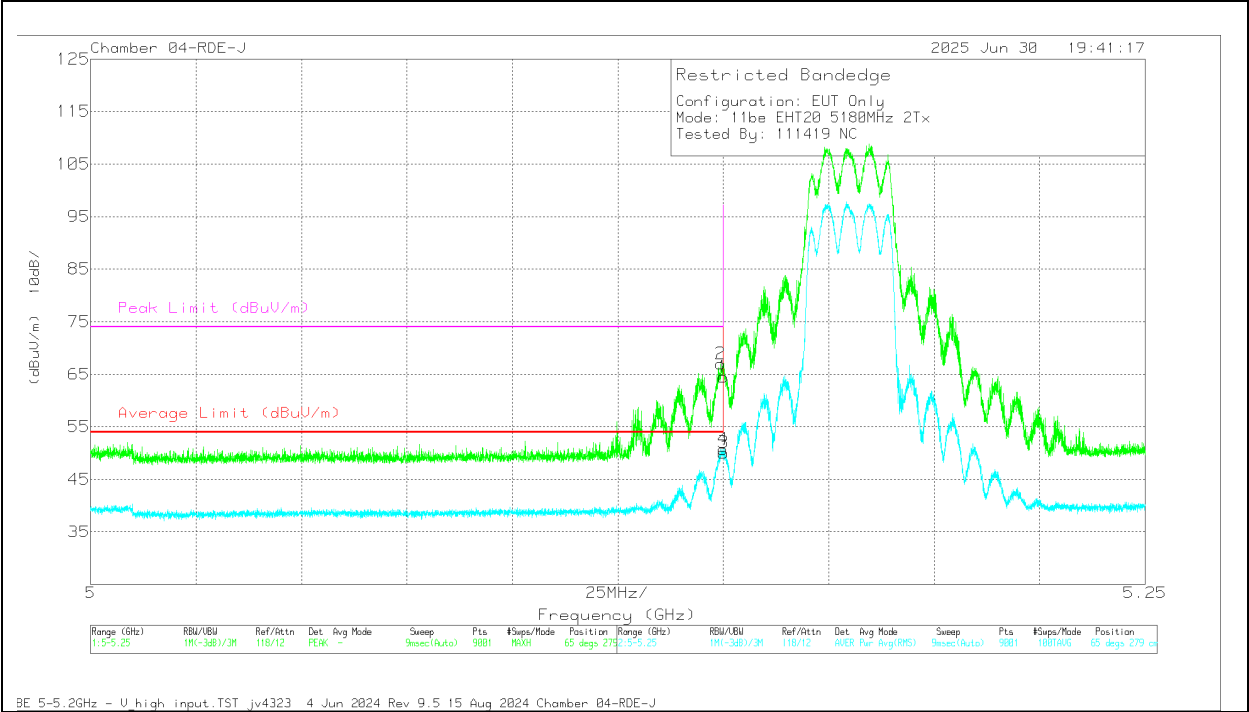

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	54.52	Pk	34.5	-24.5	0	64.52	-	-	74	-9.48	65	279	V
2	* 5.14939	56.89	Pk	34.5	-24.4	0	66.99	-	-	74	-7.01	65	279	V
3	* 5.15	40.07	RMS	34.5	-24.5	0	50.07	54	-3.93	-	-	65	279	V
4	* 5.149973	40.73	RMS	34.5	-24.5	0	50.73	54	-3.27	-	-	65	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ FRR/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5180	6 + 5	5.147862	46.85	RMS	34.3	-36.73	0	44.42	54	-9.58	-	-	125	296	H
			5.14789	59.68	Pk	34.3	-36.73	0	57.25	-	-	74	-16.75	125	296	H
			5.15	56.22	Pk	34.3	-36.68	0	53.84	-	-	74	-20.16	125	296	H
			5.15	45.5	RMS	34.3	-36.68	0	43.12	54	-10.88	-	-	125	296	H
			5.126362	58.63	Pk	34.3	-36.77	0	56.16	-	-	74	-17.84	201	305	V
			5.143807	46.83	RMS	34.3	-36.82	0	44.31	54	-9.69	-	-	201	305	V
			5.15	56.49	Pk	34.3	-36.68	0	54.11	-	-	74	-19.89	201	305	V
			5.15	45	RMS	34.3	-36.68	0	42.62	54	-11.38	-	-	201	305	V
EHT40 (242T / Index 61)	5190	6 + 5	* 5.150	46.88	Pk	34.3	-23.47	0	57.71	-	-	74	-16.29	47	176	H
			* 5.149723	49.38	Pk	34.3	-23.45	0	60.23	-	-	74	-13.77	47	176	H
			* 5.150	31.58	RMS	34.3	-23.47	0	42.41	54	-11.59	-	-	47	176	H
			* 5.149723	33.04	RMS	34.3	-23.45	0	43.89	54	-10.11	-	-	47	176	H
			* 5.150	51.59	Pk	34.3	-23.47	0	62.42	-	-	74	-11.58	43	393	V
			* 5.149973	54.33	Pk	34.3	-23.47	0	65.16	-	-	74	-8.84	43	393	V
			* 5.150	36.22	RMS	34.3	-23.47	0	47.05	54	-6.95	-	-	43	393	V
			* 5.149918	36.58	RMS	34.3	-23.46	0	47.42	54	-6.58	-	-	43	393	V
EHT40 (52T / Index 37))	5190	6 + 5	* 5.150	57.45	Pk	34.4	-30.7	0	61.15	-	-	74	-12.85	99	233	H
			* 5.149957	58.69	Pk	34.4	-30.7	0	62.39	-	-	74	-13.77	99	233	H
			* 5.150	42.66	RMS	34.4	-30.7	0.17	46.53	54	-7.47	-	-	99	233	H
			* 5.149894	42.99	RMS	34.4	-30.7	0.17	46.86	54	-7.14	-	-	99	233	H
			* 5.150	59.2	Pk	34.4	-30.7	0	62.9	-	-	74	-11.1	61	110	V
			* 5.1498	61.19	Pk	34.4	-30.7	0	64.89	-	-	74	-9.11	61	110	V
			* 5.150	44.02	RMS	34.4	-30.7	0.17	47.89	54	-6.11	-	-	61	110	V
			* 5.149894	44.16	RMS	34.4	-30.7	0.17	48.03	54	-5.97	-	-	61	110	V
EHT80 (242T / Index 61)	5210 (Lower)	6 + 5	* 5.150	61.04	Pk	34.3	-36.52	0	58.82	-	-	74	-15.18	226	119	H
			* 5.147529	61.99	Pk	34.3	-36.6	0	59.69	-	-	74	-14.31	226	119	H
			* 5.150	46.76	RMS	34.3	-36.52	0	44.54	54	-9.46	-	-	226	119	H
			* 5.148362	47.68	RMS	34.3	-36.53	0	45.45	54	-8.55	-	-	226	119	H
			* 5.150	60.09	Pk	34.3	-36.52	0	57.87	-	-	74	-16.13	226	397	V
			* 5.149251	63.11	Pk	34.3	-36.44	0	60.97	-	-	74	-13.03	226	397	V
			* 5.150	46.99	RMS	34.3	-36.52	0	44.77	54	-9.23	-	-	226	397	V
			* 5.148668	47.85	RMS	34.3	-36.47	0	45.68	54	-8.32	-	-	226	397	V
EHT80 (52T / Index 37)	5210 (Lower)	6 + 5	* 5.150	59.57	Pk	34.3	-36.52	0	57.35	-	-	74	-16.65	217	212	H
			* 5.149668	60.56	Pk	34.3	-36.48	0	58.38	-	-	74	-15.62	217	212	H
			* 5.150	45.4	RMS	34.3	-36.52	0.16	43.34	54	-10.66	-	-	217	212	H
			* 5.000306	46.64	RMS	34.4	-36.88	0.16	44.32	54	-9.68	-	-	217	212	H
			* 5.150	62.11	Pk	34.3	-36.52	0	59.89	-	-	74	-14.11	179	384	V
			* 5.149696	64.39	Pk	34.3	-36.49	0	62.2	-	-	74	-11.8	179	384	V
			* 5.150	46.08	RMS	34.3	-36.52	0.16	44.02	54	-9.98	-	-	179	384	V
			* 5.149196	47.03	RMS	34.3	-36.43	0.16	45.06	54	-8.94	-	-	179	384	V
EHT160 (242T / Index 61)	5250 (Lower)	6 + 5	* 5.150	58.67	Pk	34.4	-30.7	0	62.37	-	-	74	-11.63	85	248	H
			* 5.146956	59.22	Pk	34.4	-30.7	0	62.92	-	-	74	-11.08	85	248	H
			* 5.150	44.01	RMS	34.4	-30.7	0.1	47.81	54	-6.19	-	-	85	248	H
			* 5.1498	44.97	RMS	34.4	-30.7	0.1	48.77	54	-5.23	-	-	85	248	H
			* 5.150	59.72	Pk	34.4	-30.7	0	63.42	-	-	74	-10.58	55	368	V
			* 5.149863	62.23	Pk	34.4	-30.7	0	65.93	-	-	74	-8.07	55	368	V
			* 5.150	46.11	RMS	34.4	-30.7	0.1	49.91	54	-4.09	-	-	55	368	V
			* 5.149238	46.35	RMS	34.4	-30.7	0.1	50.15	54	-3.85	-	-	55	368	V
EHT160 (52T / Index 37)	5250 (Lower)	6 + 5	* 5.150	50.76	Pk	34.4	-30.7	0	54.46	-	-	74	-19.54	60	146	H
			* 5.136049	53.27	Pk	34.3	-30.7	0	56.87	-	-	74	-17.13	60	146	H
			* 5.150	39.64	RMS	34.4	-30.7	0.2	43.54	54	-10.46	-	-	60	146	H
			* 5.00225	41.53	RMS	34.1	-30.8	0.2	45.03	54	-8.97	-	-	60	146	H
			* 5.150	53.41	Pk	34.4	-30.7	0	57.11	-	-	74	-16.89	57	352	V
			* 5.149175	54.82	Pk	34.4	-30.7	0	58.52	-	-	74	-15.48	57	352	V
			* 5.150	40.2	RMS	34.4	-30.7	0.2	44.1	54	-9.9	-	-	57	352	V
			* 5.106045	41.17	RMS	34.3	-30.7	0.2	44.97	54	-9.03	-	-	57	352	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52

HORIZONTAL RESULT

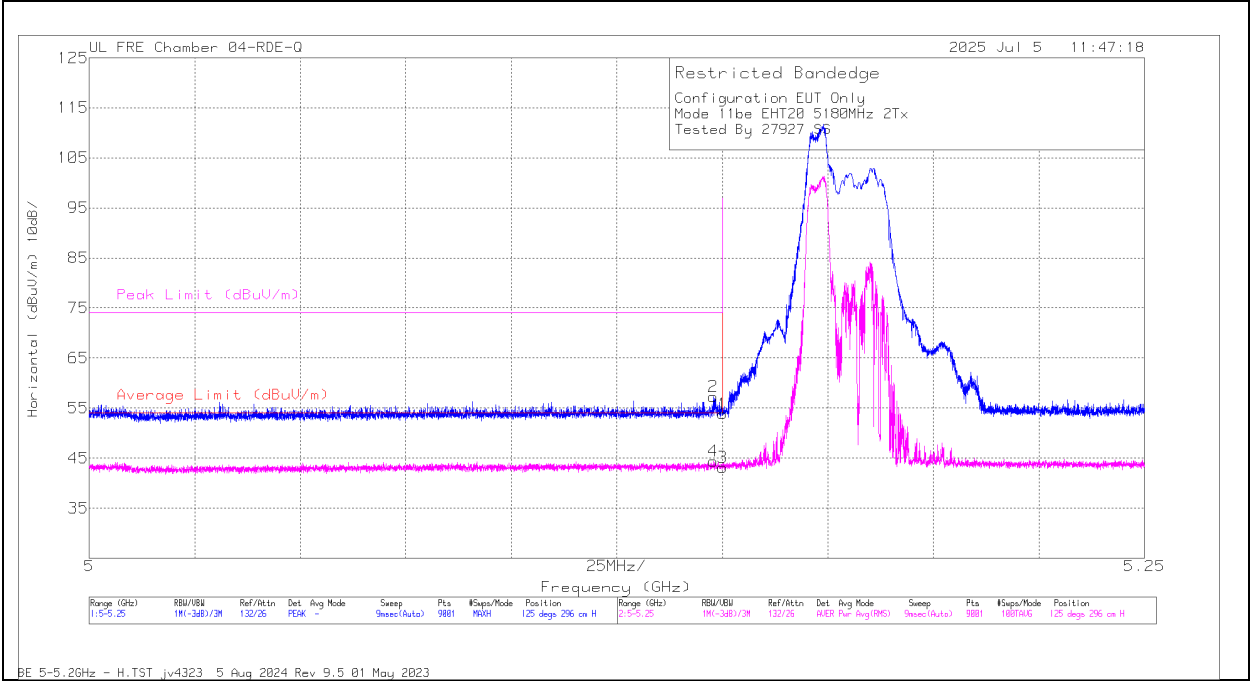


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.147862	46.85	RMS	34.3	0	-36.73	44.42	54	-9.58	-	-	125	296	H
2	5.14789	59.68	PK	34.3	0	-36.73	57.25	-	-	74	-16.75	125	296	H
1	5.15	56.22	PK	34.3	0	-36.68	53.84	-	-	74	-20.16	125	296	H
3	5.15	45.5	RMS	34.3	0	-36.68	43.12	54	-10.88	-	-	125	296	H

Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52

VERTICAL RESULT

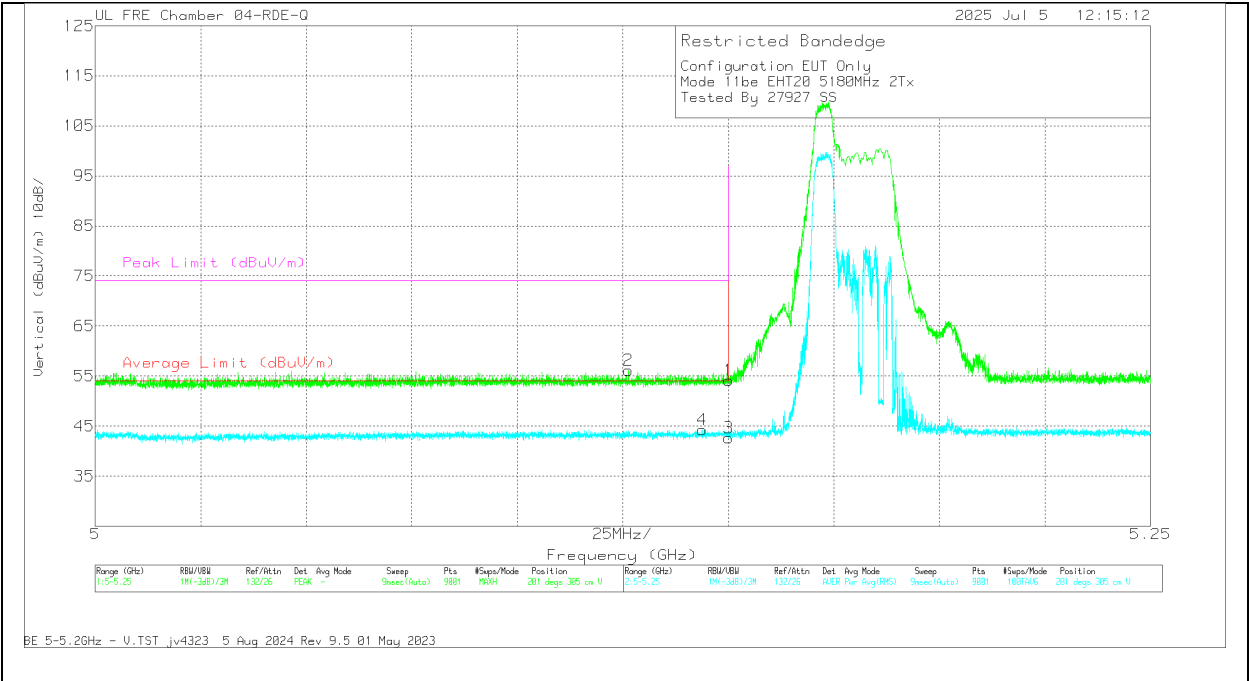

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.126362	58.63	Pk	34.3	0	-36.77	56.16	-	-	74	-17.84	201	305	V
4	5.143807	46.83	RMS	34.3	0	-36.82	44.31	54	-9.69	-	-	201	305	V
1	5.15	56.49	Pk	34.3	0	-36.68	54.11	-	-	74	-19.89	201	305	V
3	5.15	45	RMS	34.3	0	-36.68	42.62	54	-11.38	-	-	201	305	V

Pk - Peak detector
RMS - RMS detection

1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5180	6 + 5	* 11.668242	52.3	PK-U	38.4	-40.2	0	50.5	-	-	74	-23.5	0	101	H
			* 11.672024	40.78	ADR	38.4	-40.5	0	38.68	54	-15.32	-	-	0	101	H
			* 11.709438	52.38	PK-U	38.4	-40.5	0	50.28	-	-	74	-23.72	0	199	V
			* 11.720998	40.66	ADR	38.4	-40.3	0	38.76	54	-15.24	-	-	0	199	V
			* 1.268269	60.61	PK-U	29.1	-48.9	0	40.81	-	-	74	-33.19	0	101	H
			* 1.272488	60.64	PK-U	29.1	-48.9	0	40.84	-	-	74	-33.16	0	101	V
			* 1.273249	49.29	ADR	29.2	-48.8	0	29.69	54	-24.31	-	-	0	101	H
			* 1.274048	49.14	ADR	29.2	-48.7	0	29.64	54	-24.36	-	-	0	101	V
			* 3.806319	44.82	ADR	33.4	-45.8	0	32.42	54	-21.58	-	-	0	101	V
			* 3.814459	56.66	PK-U	33.5	-45.7	0	44.46	-	-	74	-29.54	0	101	V
			* 3.815485	56.46	PK-U	33.5	-45.7	0	44.26	-	-	74	-29.74	0	199	H
			* 3.821178	44.93	ADR	33.5	-45.5	0	32.93	54	-21.07	-	-	0	199	H
	5200	6 + 5	* 11.474243	52.18	PK-U	38.3	-40.6	0	49.88	-	-	74	-24.12	0	200	V
			* 11.495536	52.44	PK-U	38.3	-40.4	0	50.34	-	-	74	-23.66	0	200	H
			* 11.500962	41.05	ADR	38.3	-40.6	0	38.75	54	-15.25	-	-	0	200	H
			* 11.501123	41.08	ADR	38.3	-40.6	0	38.78	54	-15.22	-	-	0	200	V
			* 1.268736	49.2	ADR	29.1	-48.8	0	29.5	54	-24.5	-	-	0	200	V
			* 1.271236	60.41	PK-U	29.1	-48.8	0	40.71	-	-	74	-33.29	0	200	V
			* 1.272196	60.44	PK-U	29.1	-49	0	40.54	-	-	74	-33.46	0	199	H
			* 1.272582	49.25	ADR	29.2	-48.9	0	29.55	54	-24.45	-	-	0	199	H
			* 3.81914	56.67	PK-U	33.5	-45.5	0	44.67	-	-	74	-29.33	0	101	H
			* 3.823659	56.44	PK-U	33.5	-45.6	0	44.34	-	-	74	-29.66	0	200	V
			* 3.824566	44.98	ADR	33.5	-45.6	0	32.88	54	-21.12	-	-	0	101	H
			* 3.827725	44.86	ADR	33.5	-45.5	0	32.86	54	-21.14	-	-	0	200	V
	5240	6 + 5	* 11.800314	52.27	PK-U	38.5	-40.1	0	50.67	-	-	74	-23.33	2	101	H
			* 11.815465	40.83	ADR	38.5	-40.2	0	39.13	54	-14.87	-	-	2	200	V
			* 11.816168	52.06	PK-U	38.5	-40.3	0	50.26	-	-	74	-23.74	2	200	V
			* 11.824052	40.85	ADR	38.5	-40.2	0	39.15	54	-14.85	-	-	2	101	H
			* 1.268929	49.14	ADR	29.1	-48.8	0	29.44	54	-24.56	-	-	2	200	V
			* 1.271295	49.18	ADR	29.1	-48.8	0	29.48	54	-24.52	-	-	2	199	H
			* 1.272548	61.07	PK-U	29.2	-48.9	0	41.37	-	-	74	-32.63	2	199	H
			* 1.275029	60.17	PK-U	29.2	-48.9	0	40.47	-	-	74	-33.53	2	200	V
			* 3.806238	56.61	PK-U	33.4	-45.8	0	44.21	-	-	74	-29.79	2	101	H
			* 3.812157	56.07	PK-U	33.4	-45.8	0	43.67	-	-	74	-30.33	2	200	V
			* 3.816024	44.75	ADR	33.5	-45.8	0	32.45	54	-21.55	-	-	2	200	V
			* 3.828464	44.86	ADR	33.5	-45.5	0	32.86	54	-21.14	-	-	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5190	6 + 5	* 1.183557	62.42	PK-U	28.5	-50.1	0	40.82	-	-	74	-33.18	1	101	H
			* 1.180765	50.85	ADR	28.5	-50.28	0	29.07	54	-24.93	-	-	1	101	H
			* 4.172971	58.19	PK-U	33.3	-47.6	0	43.89	-	-	74	-30.11	1	101	H
			* 4.174398	46.48	ADR	33.3	-47.64	0	32.14	54	-21.86	-	-	1	101	H
			* 1.238863	62.57	PK-U	29.2	-50.21	0	41.56	-	-	74	-32.44	1	200	V
			* 1.240391	50.82	ADR	29.2	-50.26	0	29.76	54	-24.24	-	-	1	200	V
			* 4.329366	59.26	PK-U	33.4	-48.3	0	44.36	-	-	74	-29.64	1	200	V
			* 4.33086	47.21	ADR	33.4	-48.3	0	32.31	54	-21.69	-	-	1	200	V
			16.790648	57.16	PK-U	41.7	-44.3	0	54.56	-	-	68.2	-13.64	1	200	H
			17.594577	56.3	PK-U	41.6	-41.6	0	56.3	-	-	68.2	-11.9	1	200	V
	5230	6 + 5	* 1.244708	62.49	PK-U	29.2	-50.2	0	41.49	-	-	74	-32.51	0	200	H
			* 1.241736	50.93	ADR	29.2	-50.27	0	29.86	54	-24.14	-	-	0	200	H
			* 4.642985	58.79	PK-U	33.9	-48.6	0	44.09	-	-	74	-29.91	0	200	H
			* 4.645537	47.11	ADR	33.9	-48.5	0	32.51	54	-21.49	-	-	0	200	H
			* 1.242178	62.61	PK-U	29.2	-50.28	0	41.53	-	-	74	-32.47	0	200	V
			* 1.242831	50.98	ADR	29.2	-50.22	0	29.96	54	-24.04	-	-	0	200	V
			* 4.346903	59.18	PK-U	33.4	-48.2	0	44.38	-	-	74	-29.62	0	200	V
			* 4.346784	47.44	ADR	33.4	-48.2	0	32.64	54	-21.36	-	-	0	200	V
			17.597965	56.31	PK-U	41.6	-41.5	0	56.41	-	-	68.2	-11.79	0	200	H
			17.651033	56.71	PK-U	41.6	-42.6	0	55.71	-	-	68.2	-12.49	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5210	6 + 5	* 3.829507	58.25	PK-U	33.3	-47.75	0	43.8	-	-	74	-30.2	39	286	H
			* 3.828686	46.16	ADR	33.3	-47.73	0	31.73	54	-22.27	-	-	39	286	H
			* 3.827531	58.25	PK-U	33.3	-47.8	0	43.75	-	-	74	-30.25	335	105	V
			* 3.827295	46.09	ADR	33.3	-47.8	0	31.59	54	-22.41	-	-	335	105	V
			* 15.633521	55.91	PK-U	40.2	-44.65	0	51.46	-	-	74	-22.54	131	156	H
			* 15.633913	44.28	ADR	40.2	-44.61	0	39.87	54	-14.13	-	-	131	156	H
			* 15.628319	56.46	PK-U	40.2	-44.7	0	51.96	-	-	74	-22.04	89	245	V
			* 15.628995	44.59	ADR	40.2	-44.7	0	40.09	54	-13.91	-	-	89	245	V
			10.41882	57.69	PK-U	37.5	-47.4	0	47.79	-	-	68.2	-20.41	58	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 1.182142	62.02	PK-U	28.1	-49.9	0	40.22	-	-	74	-33.78	0	200	H
			* 1.181966	50.44	ADR	28.1	-49.9	0	28.64	54	-25.36	-	-	0	200	H
			* 3.886973	58.05	PK-U	33.5	-47.5	0	44.05	-	-	74	-29.95	0	200	H
			* 3.888169	46.04	ADR	33.5	-47.48	0	32.06	54	-21.94	-	-	0	200	H
			* 1.286895	62.22	PK-U	28.5	-49.51	0	41.21	-	-	74	-32.79	0	101	V
			* 1.289423	50.08	ADR	28.5	-49.5	0	29.08	54	-24.92	-	-	0	101	V
			* 4.516895	58.23	PK-U	34	-47.8	0	44.43	-	-	74	-29.57	0	101	V
			* 4.519309	46.64	ADR	34	-47.93	0	32.71	54	-21.29	-	-	0	101	V
			16.56706	54.3	PK-U	41.5	-42.2	0	53.6	-	-	68.2	-14.6	0	199	H
			17.046959	52.97	PK-U	41.8	-41.3	0	53.47	-	-	68.2	-14.73	0	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)

LOW CHANNEL RESULTS

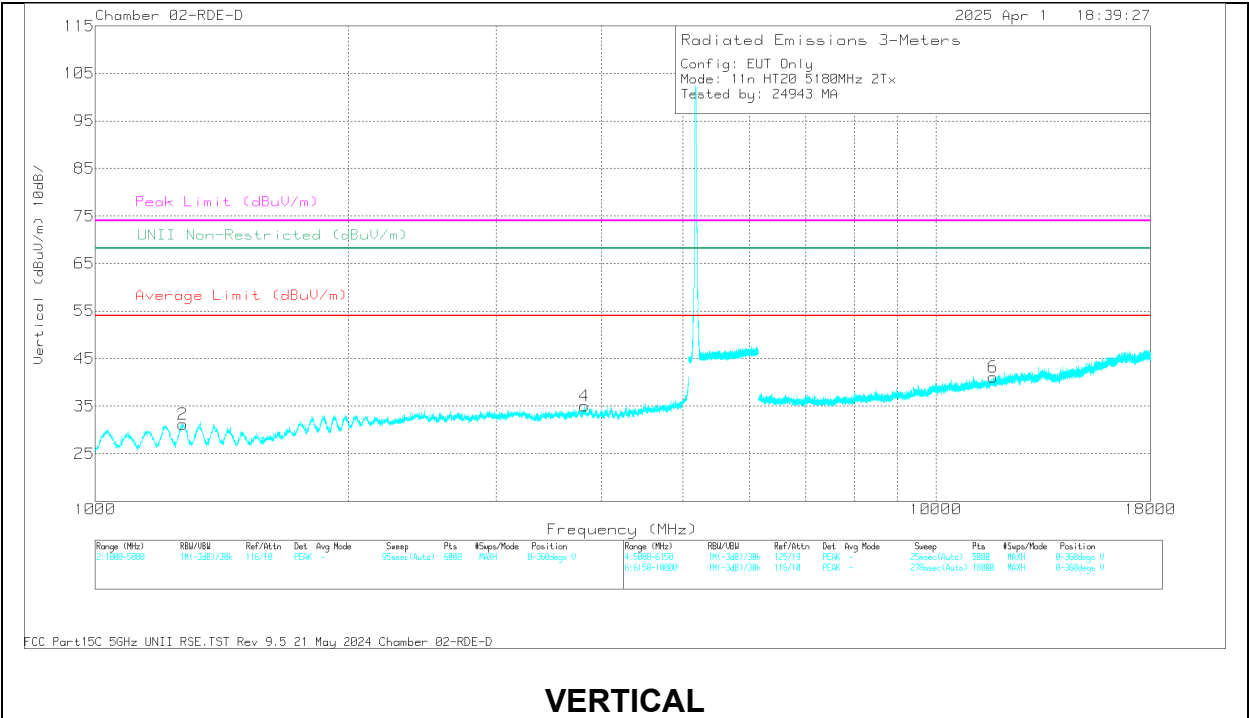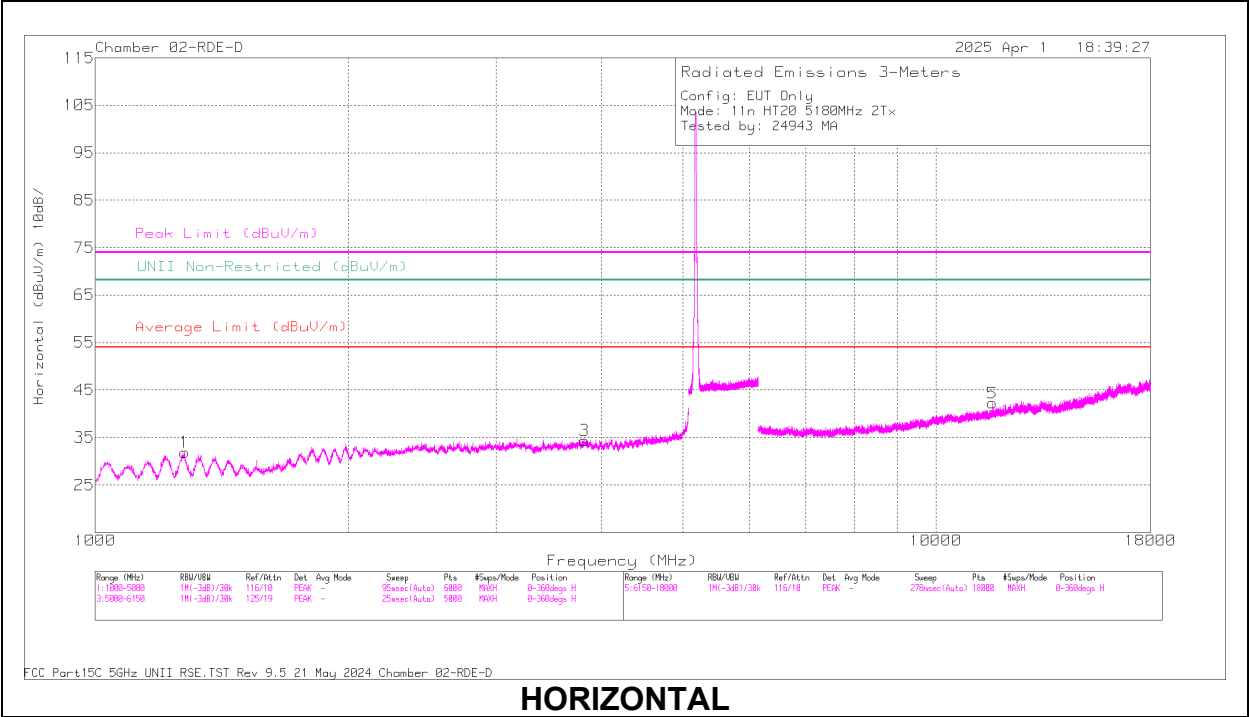

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.668242	52.3	PK-U	38.4	-40.2	0	50.5	-	-	74	-23.5	0	101	H
5	* 11.672024	40.78	ADR	38.4	-40.5	0	38.68	54	-15.32	-	-	0	101	H
6	* 11.709438	52.38	PK-U	38.4	-40.5	0	50.28	-	-	74	-23.72	0	199	V
6	* 11.720998	40.66	ADR	38.4	-40.3	0	38.76	54	-15.24	-	-	0	199	V
2	* 1.268269	60.61	PK-U	29.1	-48.9	0	40.81	-	-	74	-33.19	0	101	H
1	* 1.272488	60.64	PK-U	29.1	-48.9	0	40.84	-	-	74	-33.16	0	101	V
2	* 1.273249	49.29	ADR	29.2	-48.8	0	29.69	54	-24.31	-	-	0	101	H
1	* 1.274048	49.14	ADR	29.2	-48.7	0	29.64	54	-24.36	-	-	0	101	V
4	* 3.806319	44.82	ADR	33.4	-45.8	0	32.42	54	-21.58	-	-	0	101	V
4	* 3.814459	56.66	PK-U	33.5	-45.7	0	44.46	-	-	74	-29.54	0	101	V
3	* 3.815485	56.46	PK-U	33.5	-45.7	0	44.26	-	-	74	-29.74	0	199	H
3	* 3.821178	44.93	ADR	33.5	-45.5	0	32.93	54	-21.07	-	-	0	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11be MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5180	6 + 5	* 11.866479	52.03	PK-U	38.6	-40.2	0	50.43	-	-	74	-23.57	360	101	H
			* 11.87598	52.15	PK-U	38.6	-40	0	50.75	-	-	74	-23.25	360	200	V
			* 11.877762	40.53	ADR	38.6	-40.3	0	38.83	54	-15.17	-	-	360	200	V
			* 11.87847	40.35	ADR	38.6	-40.3	0	38.65	54	-15.35	-	-	360	101	H
			* 1.436133	48.96	ADR	28.2	-48.6	0	28.56	54	-25.44	-	-	360	200	V
			* 1.436293	59.84	PK-U	28.2	-48.6	0	39.44	-	-	74	-34.56	360	200	H
			* 1.444527	49.03	ADR	28.1	-48.6	0	28.53	54	-25.47	-	-	360	200	H
			* 1.445261	60.15	PK-U	28.1	-48.6	0	39.65	-	-	74	-34.35	360	200	V
			* 3.984455	44.37	ADR	33.4	-45.7	0	32.07	54	-21.93	-	-	360	200	H
			* 3.992315	44.55	ADR	33.4	-45.8	0	32.15	54	-21.85	-	-	360	101	V
			* 3.996695	56.21	PK-U	33.4	-45.7	0	43.91	-	-	74	-30.09	360	101	V
			* 4.001322	55.82	PK-U	33.4	-45.7	0	43.52	-	-	74	-30.48	360	200	H
	5200	6 + 5	* 11.539264	52.19	PK-U	38.2	-40.3	0	50.09	-	-	74	-23.91	360	200	V
			* 11.540788	41.01	ADR	38.2	-40.2	0	39.01	54	-14.99	-	-	360	200	H
			* 11.550113	40.88	ADR	38.2	-40.5	0	38.58	54	-15.42	-	-	360	200	V
			* 11.553979	52.05	PK-U	38.2	-40.2	0	50.05	-	-	74	-23.95	360	200	H
			* 1.326371	60.71	PK-U	28.9	-48.9	0	40.71	-	-	74	-33.29	360	101	V
			* 1.329604	49.28	ADR	28.8	-48.9	0	29.18	54	-24.82	-	-	360	199	H
			* 1.329944	49.54	ADR	28.8	-48.9	0	29.44	54	-24.56	-	-	360	101	V
			* 1.332444	60.98	PK-U	28.8	-48.8	0	40.98	-	-	74	-33.02	360	199	H
			* 3.813831	44.97	ADR	33.5	-45.7	0	32.77	54	-21.23	-	-	360	199	V
			* 3.818311	44.83	ADR	33.5	-45.6	0	32.73	54	-21.27	-	-	360	199	H
			* 3.824125	56.89	PK-U	33.5	-45.6	0	44.79	-	-	74	-29.21	360	199	V
			* 3.827811	56.52	PK-U	33.5	-45.5	0	44.52	-	-	74	-29.48	360	199	H
	5240	6 + 5	* 11.82198	52.54	PK-U	38.5	-40.4	0	50.64	-	-	74	-23.36	360	101	V
			* 11.822771	40.39	ADR	38.5	-40.2	0	38.69	54	-15.31	-	-	360	101	V
			* 11.83318	40.49	ADR	38.6	-40.2	0	38.89	54	-15.11	-	-	360	199	H
			* 11.840389	51.73	PK-U	38.6	-40.4	0	49.93	-	-	74	-24.07	360	199	H
			* 1.385741	49.37	ADR	28.6	-48.8	0	29.17	54	-24.83	-	-	360	101	V
			* 1.386554	60.78	PK-U	28.6	-48.8	0	40.58	-	-	74	-33.42	360	101	V
			* 1.386934	49.47	ADR	28.6	-48.9	0	29.17	54	-24.83	-	-	360	101	H
			* 1.391561	60.45	PK-U	28.6	-48.8	0	40.25	-	-	74	-33.75	360	101	H
			* 3.800278	56.49	PK-U	33.4	-45.9	0	43.99	-	-	74	-30.01	360	101	V
			* 3.814511	44.86	ADR	33.5	-45.7	0	32.66	54	-21.34	-	-	360	101	H
			* 3.815038	44.8	ADR	33.5	-45.7	0	32.6	54	-21.4	-	-	360	101	V
			* 3.830311	56.5	PK-U	33.5	-45.5	0	44.5	-	-	74	-29.5	360	101	H
11be (52T / Highest PSD)	5180 (Low Index)	6 + 5	* 11.712397	52.44	PK-U	38.4	-40.4	0	50.44	-	-	74	-23.56	360	101	H
			* 11.715122	40.67	ADR	38.4	-40.6	0	38.47	54	-15.53	-	-	360	200	V
			* 11.716939	40.73	ADR	38.4	-40.2	0	38.93	54	-15.07	-	-	360	101	H
			* 11.719384	52.55	PK-U	38.4	-40.2	0	50.75	-	-	74	-23.25	360	200	V
			* 1.327525	49.31	ADR	28.8	-48.9	0	29.21	54	-24.79	-	-	360	200	V
			* 1.330198	61.1	PK-U	28.8	-48.9	0	41	-	-	74	-33	360	199	H
			* 1.331444	49.49	ADR	28.8	-48.8	0	29.49	54	-24.51	-	-	360	199	H
			* 1.336345	61.11	PK-U	28.8	-48.9	0	41.01	-	-	74	-32.99	360	200	V
			* 3.812633	55.86	PK-U	33.4	-45.7	0	43.56	-	-	74	-30.44	360	200	V
			* 3.814327	45.11	ADR	33.5	-45.7	0	32.91	54	-21.09	-	-	360	200	V
			* 3.815033	56.04	PK-U	33.5	-45.7	0	43.84	-	-	74	-30.16	360	101	H
			* 3.82704	44.86	ADR	33.5	-45.7	0	32.66	54	-21.34	-	-	360	101	H
	5200 (Mid Index)	6 + 5	* 11.561397	40.85	ADR	38.2	-40.4	0	38.65	54	-15.35	-	-	360	200	V
			* 11.563567	40.75	ADR	38.2	-40.4	0	38.55	54	-15.45	-	-	360	200	H
			* 11.567091	52.35	PK-U	38.2	-40.3	0	50.25	-	-	74	-23.75	360	200	H
			* 11.589664	52.2	PK-U	38.3	-40.3	0	50.2	-	-	74	-23.8	360	200	V
			* 1.270036	60.83	PK-U	29.1	-48.8	0	41.13	-	-	74	-32.87	360	101	V
			* 1.272908	60.92	PK-U	29.2	-48.8	0	41.32	-	-	74	-32.68	360	200	H
			* 1.274521	49.44	ADR	29.2	-48.8	0	29.84	54	-24.16	-	-	360	200	H
			* 1.276022	49.31	ADR	29.2	-48.8	0	29.71	54	-24.29	-	-	360	101	V
			* 4.099719	57.03	PK-U	33.4	-46.2	0	44.23	-	-	74	-29.77	360	101	H
			* 4.101706	45.29	ADR	33.4	-46.2	0	32.49	54	-21.51	-	-	360	101	V
			* 4.10186	57.13	PK-U	33.4	-46.2	0	44.33	-	-	74	-29.67	360	101	V
			* 4.102999	45.37	ADR	33.4	-46.2	0	32.57	54	-21.43	-	-	360	101	H
	5240 (High Index)	6 + 5	* 11.367668	52.4	PK-U	38.2	-40.5	0	50.1	-	-	74	-23.9	360	101	H
			* 11.369512	40.83	ADR	38.2	-40.7	0	38.33	54	-15.67	-	-	360	101	H
			* 11.377335	40.89	ADR	38.2	-40.7	0	38.39	54	-15.61	-	-	360	101	V
			* 11.393504	52.07	PK-U	38.2	-40.6	0	49.67	-	-	74	-24.33	360	101	V
			* 1.327285	49.5	ADR	28.9	-48.8	0	29.6	54	-24.4	-	-	360	101	V
			* 1.330525	49.35	ADR	28.8	-48.9	0	29.25	54	-24.75	-	-	360	101	H
			* 1.333665	61.12	PK-U	28.8	-48.8	0	41.12	-	-	74	-32.88	360	101	V
			* 1.336878	60.63	PK-U	28.8	-48.9	0	40.53	-	-	74	-33.47	360	101	H
			* 4.103379	57.21	PK-U	33.4	-46.1	0	44.51	-	-	74	-29.49	360	101	V
			* 4.107719	45.4	ADR	33.4	-46	0	32.8	54	-21.2	-	-	360	101	V
			* 4.109753	57.07	PK-U	33.4	-46	0	44.47	-	-	74	-29.53	360	200	H
			* 4.111413	45.61	ADR	33.4	-46	0	33.01	54	-20.99	-	-	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5190	6 + 5	* 1.177929	62.54	PK-U	28.1	-49.91	0	40.73	-	-	74	-33.27	1	101	H
			* 1.179417	50.49	ADR	28.1	-49.9	0	28.69	54	-25.31	-	-	1	101	H
			* 4.226513	57.03	PK-U	33.5	-47.3	0	43.23	-	-	74	-30.77	1	101	H
			* 4.225837	45.31	ADR	33.5	-47.3	0	31.51	54	-22.49	-	-	1	101	H
			* 1.241529	61.92	PK-U	28.5	-49.75	0	40.67	-	-	74	-33.33	1	101	V
			* 1.241732	50.5	ADR	28.5	-49.73	0	29.27	54	-24.73	-	-	1	101	V
			* 4.516586	58.31	PK-U	34	-47.8	0	44.51	-	-	74	-29.49	1	200	V
			* 4.515693	46.66	ADR	34	-47.83	0	32.83	54	-21.17	-	-	1	200	V
			16.99237	54.52	PK-U	41.9	-41.93	0	54.49	-	-	68.2	-13.71	1	200	H
			17.05473	53.57	PK-U	41.8	-41.2	0	54.17	-	-	68.2	-14.03	1	200	V
			* 1.293889	62.38	PK-U	28.5	-49.59	0	41.29	-	-	74	-32.71	0	199	H
			* 1.291498	50.27	ADR	28.5	-49.6	0	29.17	54	-24.83	-	-	0	199	H
	5230	6 + 5	* 4.569528	58.69	PK-U	34.1	-47.85	0	44.94	-	-	74	-29.06	0	101	H
			* 4.571105	46.61	ADR	34.1	-47.79	0	32.92	54	-21.08	-	-	0	101	H
			* 1.396672	62.72	PK-U	28.3	-49.4	0	41.62	-	-	74	-32.38	0	200	V
			* 1.393998	49.99	ADR	28.3	-49.4	0	28.89	54	-25.11	-	-	0	200	V
			* 4.66304	58.93	PK-U	34.1	-47.9	0	45.13	-	-	74	-28.87	0	200	V
			* 4.66142	46.59	ADR	34.1	-47.9	0	32.79	54	-21.21	-	-	0	200	V
			16.521076	54.55	PK-U	41.4	-42.19	0	53.76	-	-	68.2	-14.44	0	200	V
			17.045444	53.97	PK-U	41.8	-41.46	0	54.31	-	-	68.2	-13.89	0	200	H
11be (242T / Highest PSD)	5190 (Low index)	6 + 5	1.998526	49.6	ADR	31.5	-48.88	0	32.22	-	-	-	-	342	367	V
			1.999275	61.58	PK-U	31.5	-48.86	0	44.22	-	-	68.2	-23.98	342	367	V
			1.99956	49.61	ADR	31.5	-48.85	0	32.26	-	-	-	-	334	170	H
			2.001745	61.15	PK-U	31.5	-48.96	0	43.69	-	-	68.2	-24.51	334	170	H
			3.195776	47.02	ADR	32.8	-46.64	0	33.18	-	-	-	-	346	373	V
			3.197248	58.55	PK-U	32.8	-46.65	0	44.7	-	-	68.2	-23.5	145	266	H
			3.197256	47.07	ADR	32.8	-46.66	0	33.21	-	-	-	-	145	266	H
			3.197414	59.13	PK-U	32.8	-46.66	0	45.27	-	-	68.2	-22.93	346	373	V
			8.993812	44.73	ADR	36.2	-42.69	0	38.24	-	-	-	-	167	112	H
			8.993893	56.5	PK-U	36.2	-42.69	0	50.01	-	-	68.2	-18.19	167	112	H
			8.999028	56.62	PK-U	36.2	-42.8	0	50.02	-	-	68.2	-18.18	348	379	V
			8.999647	44.78	ADR	36.2	-42.85	0	38.13	-	-	-	-	348	379	V
	5230 (Low index)	6 + 5	1.941242	50.34	ADR	31.1	-49.16	0	32.28	-	-	-	-	348	186	V
			1.941808	61.99	PK-U	31.1	-49.19	0	43.9	-	-	68.2	-24.3	348	186	V
			1.946959	62.11	PK-U	31.1	-49.13	0	44.08	-	-	68.2	-24.12	94	398	H
			1.947129	50.4	ADR	31.1	-49.13	0	32.37	-	-	-	-	94	398	H
			3.066638	59.58	PK-U	33	-47.04	0	45.54	-	-	68.2	-22.66	96	286	V
			3.068587	47.1	ADR	33	-47.03	0	33.07	-	-	-	-	96	286	V
			3.074849	46.96	ADR	33	-47.02	0	32.94	-	-	-	-	240	315	H
			3.076526	58.98	PK-U	33	-47.02	0	44.96	-	-	68.2	-23.24	240	315	H
			10.436944	58.91	PK-U	37.5	-45.19	0	51.22	-	-	68.2	-16.98	17	243	V
			10.437795	47.03	ADR	37.5	-45.15	0	39.38	-	-	-	-	17	243	V
			10.440221	58.8	PK-U	37.5	-45.2	0	51.1	-	-	68.2	-17.1	92	371	H
			10.440864	46.93	ADR	37.5	-45.24	0	39.19	-	-	-	-	92	371	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5210	6 + 5	* 15.630851	53.9	PK-U	40.5	0	-41.8	52.6	-	-	74	-21.4	96	201	H
			* 15.63003	41.89	ADR	40.5	0	-41.8	40.59	54	-13.41	-	-	96	201	H
			* 15.632648	53.7	PK-U	40.5	0	-41.8	52.4	-	-	74	-21.6	15	267	V
			* 15.631006	41.99	ADR	40.5	0	-41.8	40.69	54	-13.31	-	-	15	267	V
			2.462406	60.06	PK-U	32.2	0	-49.24	43.02	-	-	68.2	-25.18	346	234	V
			2.463182	60.43	PK-U	32.2	0	-49.3	43.33	-	-	68.2	-24.87	4	342	H
			10.421843	56.18	PK-U	37.5	0	-45.18	48.5	-	-	68.2	-19.7	185	393	V
			10.425208	56.3	PK-U	37.5	0	-45.38	48.42	-	-	68.2	-19.78	109	271	H
11be (242T)	5210 (Low Index)	6 + 5	* 2.263022	60.9	PK-U	31.7	0	-50.26	42.34	-	-	74	-31.66	1	101	H
			* 2.273335	49.29	ADR	31.8	0	-50.3	30.79	54	-23.21	-	-	1	101	H
			* 2.269614	62.04	PK-U	31.8	0	-50.3	43.54	-	-	74	-30.46	1	101	V
			* 2.284381	49.24	ADR	31.8	0	-50.28	30.76	54	-23.24	-	-	1	101	V
			* 8.228994	55.71	PK-U	36.1	0	-45.74	46.07	-	-	74	-27.93	1	101	H
			* 8.207443	44.06	ADR	36.1	0	-45.7	34.46	54	-19.54	-	-	1	101	H
			* 16.052767	53.81	PK-U	41	0	-42.46	52.35	-	-	74	-21.65	1	101	H
			* 16.075652	42.08	ADR	41	0	-42.4	40.68	54	-13.32	-	-	1	101	H
			* 8.420723	56.03	PK-U	36	0	-45.46	46.57	-	-	74	-27.43	1	101	V
			* 8.424096	43.99	ADR	36	0	-45.39	34.6	54	-19.4	-	-	1	101	V
			* 15.747138	53.66	PK-U	41.2	0	-42.18	52.68	-	-	74	-21.32	1	101	V
			* 15.745845	41.92	ADR	41.2	0	-42.19	40.93	54	-13.07	-	-	1	101	V
11be (52T / Highest PSD)	5210 (Low Index)	6 + 5	* 2.334561	61.75	PK-U	31.7	0	-49.23	44.22	-	-	74	-29.78	360	198	H
			* 2.328021	49.5	ADR	31.7	0.17	-49.13	32.24	54	-21.76	-	-	360	198	H
			* 2.299556	61.33	PK-U	31.6	0	-49	43.93	-	-	74	-30.07	360	200	V
			* 2.32161	49.8	ADR	31.7	0.17	-49.2	32.47	54	-21.53	-	-	360	200	V
			* 7.582095	57.7	PK-U	35.7	0	-45.91	47.49	-	-	74	-26.51	360	101	H
			* 7.560673	46.42	ADR	35.7	0.17	-45.65	36.64	54	-17.36	-	-	360	101	H
			* 7.595237	57.82	PK-U	35.8	0	-45.94	47.68	-	-	74	-26.32	360	200	V
			* 7.581957	46.26	ADR	35.7	0.17	-45.91	36.22	54	-17.78	-	-	360	200	V
			14.051139	47.85	ADR	39	0.17	-44.15	42.87	-	-	-	-	360	101	H
			14.078308	59.53	PK-U	39.1	0	-43.83	54.8	-	-	68.2	-13.4	360	101	H
			14.078936	47.89	ADR	39.1	0.17	-43.82	43.34	-	-	-	-	360	101	V
			14.107442	59.43	PK-U	39.1	0	-43.65	54.88	-	-	68.2	-13.32	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250 (Straddle)	6 + 5	* 1.239853	62.03	PK-U	28.5	0	-49.89	40.64	-	-	74	-33.36	0	101	H
			* 1.240651	50.33	ADR	28.5	0	-49.83	29	54	-25	-	-	0	101	H
			* 4.504996	57.9	PK-U	34	0	-47.7	44.2	-	-	74	-29.8	0	101	H
			* 4.50527	46.28	ADR	34	0	-47.73	32.55	54	-21.45	-	-	0	101	H
			* 1.18604	62.19	PK-U	28.1	0	-49.9	40.39	-	-	74	-33.61	0	101	V
			* 1.186505	50.42	ADR	28.1	0	-49.95	28.57	54	-25.43	-	-	0	101	V
			* 4.811528	58.71	PK-U	34	0	-47.9	44.81	-	-	74	-29.19	0	101	V
			* 4.809309	46.71	ADR	34	0	-47.9	32.81	54	-21.19	-	-	0	101	V
			16.53086	54.75	PK-U	41.4	0	-42.1	54.05	-	-	68.2	-14.15	0	101	V
			17.086443	54.19	PK-U	41.8	0	-41.34	54.65	-	-	68.2	-13.55	0	200	H
11be (242T)	5250 (Straddle) (Mid Index)	6 + 5	8.006437	57.27	PK-U	35.8	0	-44.96	48.11	-	-	68.2	-20.09	76	209	H
			8.007324	46.01	ADR	35.8	0.1	-44.92	36.99	-	-	-	-	76	209	H
			8.008838	45.94	ADR	35.8	0.1	-44.94	36.9	-	-	-	-	338	195	V
			8.008983	57.68	PK-U	35.8	0	-44.94	48.54	-	-	68.2	-19.66	338	195	V
			10.024557	59.06	PK-U	37.3	0	-46.51	49.85	-	-	68.2	-18.35	24	319	H
			10.024795	59.32	PK-U	37.3	0	-46.49	50.13	-	-	68.2	-18.07	234	172	V
			10.024911	47.78	ADR	37.3	0.1	-46.48	38.7	-	-	-	-	24	319	H
			10.025733	47.65	ADR	37.3	0.1	-46.51	38.54	-	-	-	-	234	172	V
			15.07845	46.2	ADR	39.7	0.1	-43.15	42.85	-	-	-	-	288	384	V
			15.081027	57.66	PK-U	39.7	0	-43.15	54.21	-	-	68.2	-13.99	288	384	V
11be (52T / Highest PSD)	5250 (Straddle) (Low)	6 + 5	15.082472	46.25	ADR	39.7	0.1	-43.23	42.82	-	-	-	-	358	249	H
			15.086025	57.52	PK-U	39.7	0	-43.27	53.95	-	-	68.2	-14.25	358	249	H
			1.943568	61.91	PK-U	31.1	0	-49.27	43.74	-	-	68.2	-24.46	321	197	H
			1.944652	49.99	ADR	31.1	0.2	-49.2	32.09	-	-	-	-	321	197	H
			1.945259	50.03	ADR	31.1	0.2	-49.16	32.17	-	-	-	-	2	269	V
			1.947767	61.41	PK-U	31.1	0	-49.11	43.4	-	-	68.2	-24.8	2	269	V
			3.300579	57.92	PK-U	32.7	0	-46.77	43.85	-	-	68.2	-24.35	302	355	V
			3.301877	46.03	ADR	32.7	0.2	-46.74	32.19	-	-	-	-	302	355	V
			3.306719	45.97	ADR	32.7	0.2	-46.74	32.13	-	-	-	-	335	378	H
			3.308279	57.62	PK-U	32.7	0	-46.76	43.56	-	-	68.2	-24.64	335	378	H
			14.289103	58.25	PK-U	39.2	0	-44.08	53.37	-	-	68.2	-14.83	114	270	V
			14.28937	46.51	ADR	39.2	0.2	-44.09	41.82	-	-	-	-	114	270	V
			14.297732	58.18	PK-U	39.2	0	-43.97	53.41	-	-	68.2	-14.79	178	240	H
			14.29774	46.48	ADR	39.2	0.2	-43.97	41.91	-	-	-	-	178	240	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)

LOW CHANNEL RESULTS

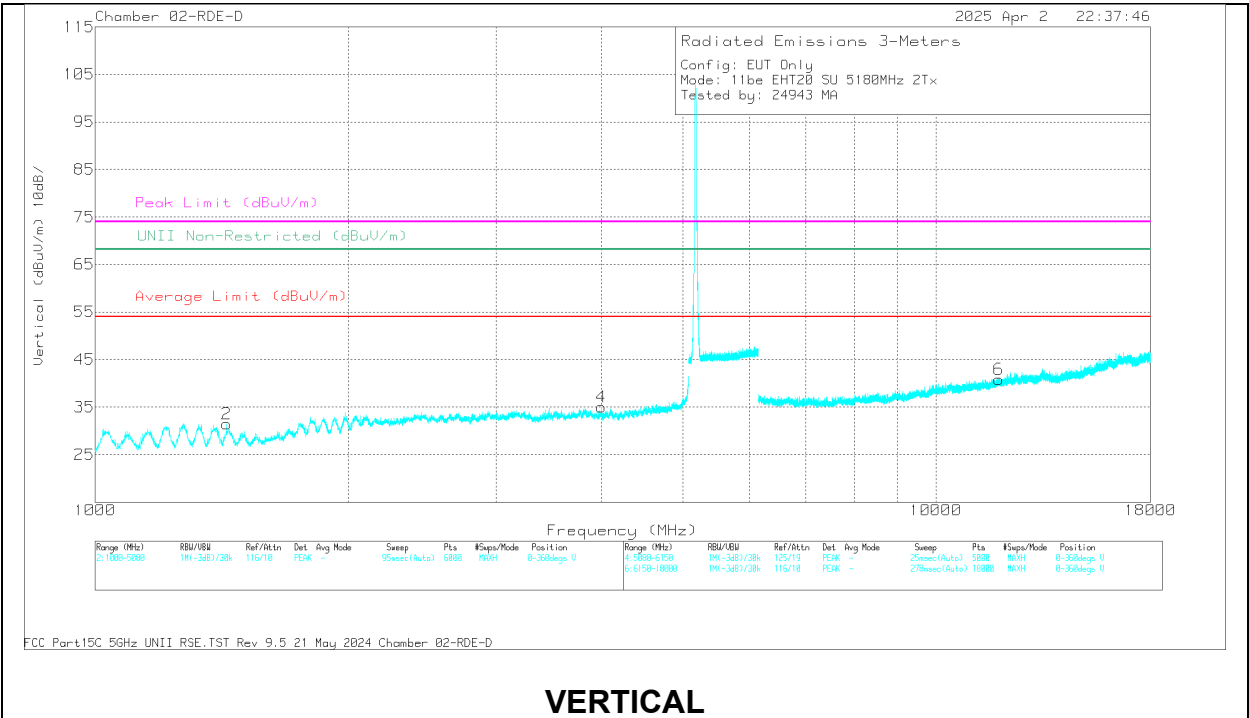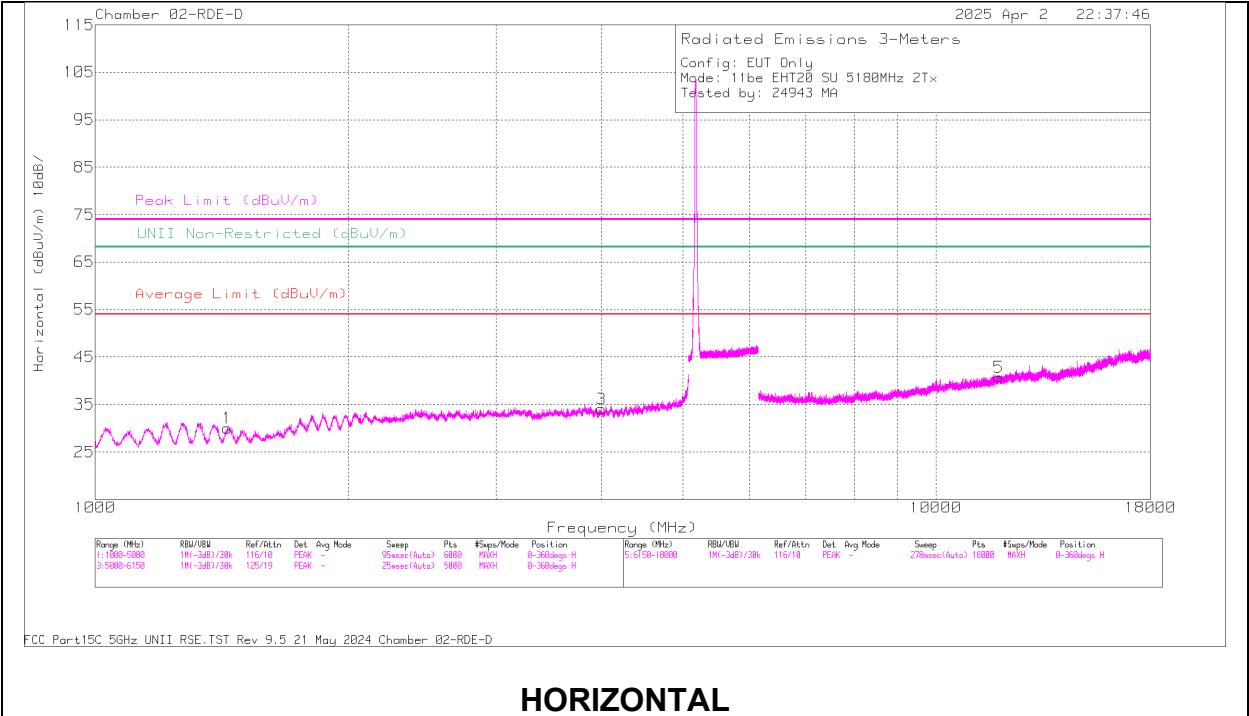

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.866479	52.03	PK-U	38.6	-40.2	0	50.43	-	-	74	-23.57	360	101	H
6	* 11.87598	52.15	PK-U	38.6	-40	0	50.75	-	-	74	-23.25	360	200	V
5	* 11.877762	40.53	ADR	38.6	-40.3	0	38.83	54	-15.17	-	-	360	200	V
6	* 11.87847	40.35	ADR	38.6	-40.3	0	38.65	54	-15.35	-	-	360	101	H
2	* 1.436133	48.96	ADR	28.2	-48.6	0	28.56	54	-25.44	-	-	360	200	V
1	* 1.436293	59.84	PK-U	28.2	-48.6	0	39.44	-	-	74	-34.56	360	200	H
1	* 1.444527	49.03	ADR	28.1	-48.6	0	28.53	54	-25.47	-	-	360	200	H
2	* 1.445261	60.15	PK-U	28.1	-48.6	0	39.65	-	-	74	-34.35	360	200	V
3	* 3.984455	44.37	ADR	33.4	-45.7	0	32.07	54	-21.93	-	-	360	200	H
4	* 3.992315	44.55	ADR	33.4	-45.8	0	32.15	54	-21.85	-	-	360	101	V
4	* 3.996695	56.21	PK-U	33.4	-45.7	0	43.91	-	-	74	-30.09	360	101	V
3	* 4.001322	55.82	PK-U	33.4	-45.7	0	43.52	-	-	74	-30.48	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.9. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.35	69.11	Pk	34.8	-38.22	0	65.69	-	-	74	-8.31	62	245	H
			* 5.350309	70.67	Pk	34.8	-38.21	0	67.26	-	-	74	-6.74	62	245	H
			* 5.35	53.23	RMS	34.8	-38.22	0	49.81	54	-4.19	-	-	62	245	H
			* 5.350192	54.19	RMS	34.8	-38.21	0	50.78	54	-3.22	-	-	62	245	H
			* 5.35	70.89	Pk	34.8	-38.22	0	67.47	-	-	74	-6.53	44	104	V
			* 5.350005	71.28	Pk	34.8	-38.22	0	67.86	-	-	74	-6.14	44	104	V
		5	* 5.35	52.9	RMS	34.8	-38.22	0	49.48	54	-4.52	-	-	44	104	V
			* 5.350332	53.51	RMS	34.8	-38.21	0	50.1	54	-3.9	-	-	44	104	V
			* 5.35	68.86	Pk	34.8	-38.22	0	65.44	-	-	74	-8.56	100	183	H
			* 5.350799	70.86	Pk	34.9	-38.19	0	67.57	-	-	74	-6.43	100	183	H
			* 5.35	53.59	RMS	34.8	-38.22	0	50.17	54	-3.83	-	-	100	183	H
			* 5.350309	54.39	RMS	34.8	-38.21	0	50.98	54	-3.02	-	-	100	183	H
			* 5.35	66.88	Pk	34.8	-38.22	0	63.46	-	-	74	-10.54	124	241	V
			* 5.351125	69.57	Pk	34.9	-38.18	0	66.29	-	-	74	-7.71	124	241	V
			* 5.35	52.67	RMS	34.8	-38.22	0	49.25	54	-4.75	-	-	124	241	V
			* 5.350355	53.44	RMS	34.8	-38.21	0	50.03	54	-3.97	-	-	124	241	V
HT40	5310	6	* 5.350	55.29	Pk	34.4	-24.18	0	65.51	-	-	74	-8.49	213	220	H
			* 5.352012	58.35	Pk	34.4	-24.12	0	68.63	-	-	74	-5.37	213	220	H
			* 5.350	37.01	RMS	34.4	-24.18	0	47.23	54	-6.77	-	-	213	220	H
			* 5.350495	37.67	RMS	34.4	-24.13	0	47.94	54	-6.06	-	-	213	220	H
			* 5.350	57.39	Pk	34.4	-24.18	0	67.61	-	-	74	-6.39	205	118	V
			* 5.350542	57.72	Pk	34.4	-24.12	0	68	-	-	74	-6	205	118	V
		5	* 5.350	36.62	RMS	34.4	-24.18	0	46.84	54	-7.16	-	-	205	118	V
			* 5.350845	38.07	RMS	34.4	-24.09	0	48.38	54	-5.62	-	-	205	118	V
			* 5.350	67.1	Pk	34.6	-35.89	0	65.81	-	-	74	-8.19	137	116	H
			* 5.350052	69.94	Pk	34.6	-35.89	0	68.65	-	-	74	-5.35	137	116	H
			* 5.350	49.45	RMS	34.6	-35.89	0	48.16	54	-5.84	-	-	138	116	H
			* 5.350659	52.39	RMS	34.6	-35.92	0	51.07	54	-2.93	-	-	138	116	H
		5	* 5.350	64.24	Pk	34.6	-35.89	0	62.95	-	-	74	-11.05	117	157	V
			* 5.350635	66.6	Pk	34.6	-35.92	0	65.28	-	-	74	-8.72	117	157	V
			* 5.350	48.01	RMS	34.6	-35.89	0	46.72	54	-7.28	-	-	117	157	V
			* 5.353832	49.6	RMS	34.6	-36.05	0	48.15	54	-5.85	-	-	117	157	V
			* 5.35	69.36	Pk	34.5	-39.05	0	64.81	-	-	74	-9.19	226	187	H
			* 5.35	52.52	RMS	34.5	-39.05	0	47.97	54	-6.03	-	-	226	187	H
VHT80	5290	6	* 5.350449	54.63	RMS	34.5	-39.03	0	50.1	54	-3.9	-	-	226	187	H
			* 5.350495	72.99	Pk	34.5	-39.03	0	68.46	-	-	74	-5.54	226	187	H
			* 5.35	70.37	Pk	34.5	-39.05	0	65.82	-	-	74	-8.18	223	217	V
			* 5.35	53.33	RMS	34.5	-39.05	0	48.78	54	-5.22	-	-	223	217	V
			* 5.351592	54.76	RMS	34.5	-39	0	50.26	54	-3.74	-	-	223	217	V
			* 5.353762	73.27	Pk	34.5	-38.94	0	68.83	-	-	74	-5.17	223	217	V
		5	* 5.35	66.33	Pk	34.5	-35	0	65.83	-	-	74	-8.17	349	112	H
			* 5.352833	69.77	Pk	34.5	-35	0	69.27	-	-	74	-4.73	349	112	H
			* 5.35	50.01	RMS	34.5	-35	0	49.51	54	-4.49	-	-	349	112	H
			* 5.350917	51.29	RMS	34.5	-35	0	50.79	54	-3.21	-	-	349	112	H
			* 5.35	66.21	Pk	34.5	-35	0	65.71	-	-	74	-8.29	346	194	V
			* 5.352833	67.52	Pk	34.5	-35	0	67.02	-	-	74	-6.98	346	194	V
		5	* 5.35	48.16	RMS	34.5	-35	0	47.66	54	-6.34	-	-	346	194	V
			* 5.35026	50.04	RMS	34.5	-35	0	49.54	54	-4.46	-	-	346	194	V
			* 5.35	45.51	Pk	34.5	-23.6	0	56.41	-	-	74	-17.59	89	140	H
			* 5.402504	58.27	Pk	34.6	-24.1	0	68.77	-	-	74	-5.23	89	140	H
			* 5.35	29.75	RMS	34.5	-23.6	0.11	40.76	54	-13.24	-	-	89	140	H
			* 5.398795	38.8	RMS	34.6	-24.1	0.11	49.41	54	-4.59	-	-	89	140	H
VHT160	5250 (Upper)	6	* 5.35	43.93	Pk	34.5	-23.6	0	54.83	-	-	74	-19.17	75	120	V
			* 5.401618	57.11	Pk	34.6	-24.1	0	67.61	-	-	74	-6.39	75	120	V
			* 5.35	29.41	RMS	34.5	-23.6	0.11	40.42	54	-13.58	-	-	75	120	V
			* 5.400801	36.84	RMS	34.6	-24.1	0.11	47.45	54	-6.55	-	-	75	120	V
		5	* 5.35	45.74	Pk	34.5	-23.6	0	56.64	-	-	74	-17.36	267	136	H
			* 5.402971	58.08	Pk	34.6	-24.1	0	68.58	-	-	74	-5.42	267	136	H
			* 5.35	32.08	RMS	34.5	-23.6	0.11	43.09	54	-10.91	-	-	267	136	H
			* 5.403088	36.14	RMS	34.6	-24	0.11	46.85	54	-7.15	-	-	267	136	H
			* 5.35	41.71	Pk	34.5	-23.6	0	52.61	-	-	74	-21.39	242	182	V
			* 5.402271	53.63	Pk	34.6	-24.1	0	64.13	-	-	74	-9.87	242	182	V
			* 5.35	30.39	RMS	34.5	-23.6	0.11	41.4	54	-12.6	-	-	242	182	V
			* 5.396695	32.62	RMS	34.6	-24.1	0.11	43.23	54	-10.77	-	-	242	182	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


BANDEDGE (HIGH CHANNEL / 5320MHz)

HORIZONTAL RESULT

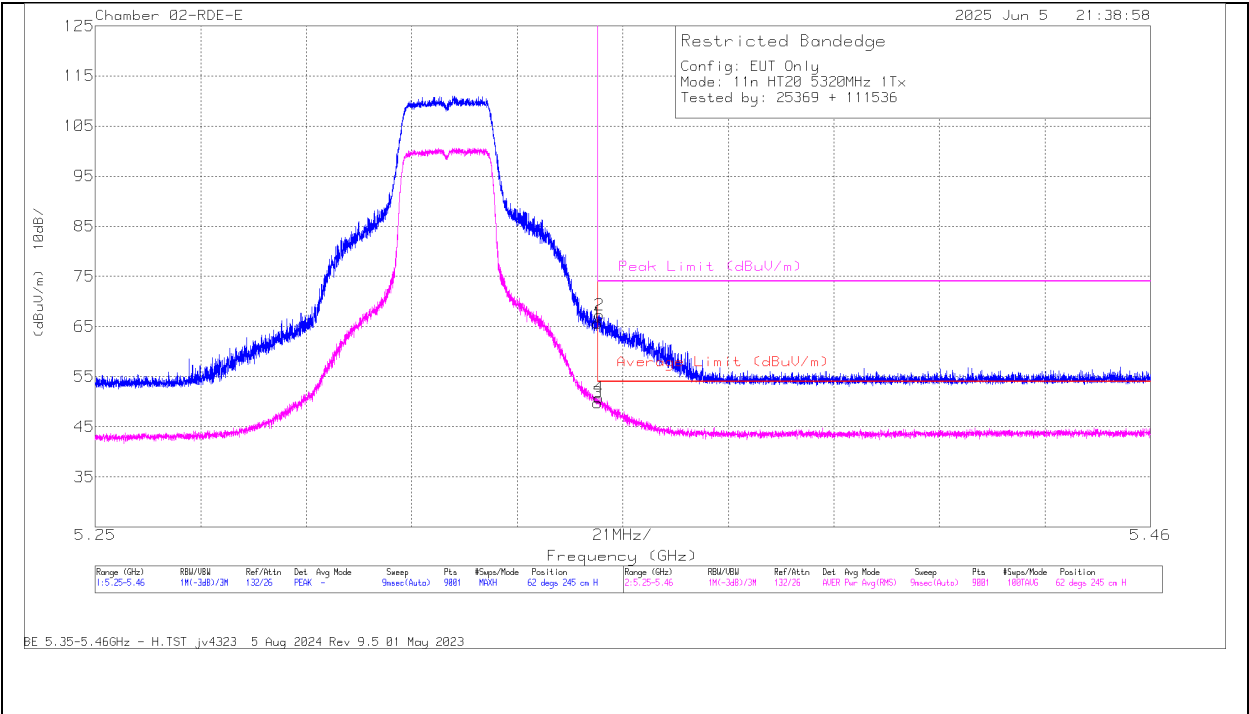

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	69.11	Pk	34.8	0	-38.22	65.69	-	-	74	-8.31	62	245	H
2	* 5.350309	70.67	Pk	34.8	0	-38.21	67.26	-	-	74	-6.74	62	245	H
3	* 5.35	53.23	RMS	34.8	0	-38.22	49.81	54	-4.19	-	-	62	245	H
4	* 5.350192	54.19	RMS	34.8	0	-38.21	50.78	54	-3.22	-	-	62	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

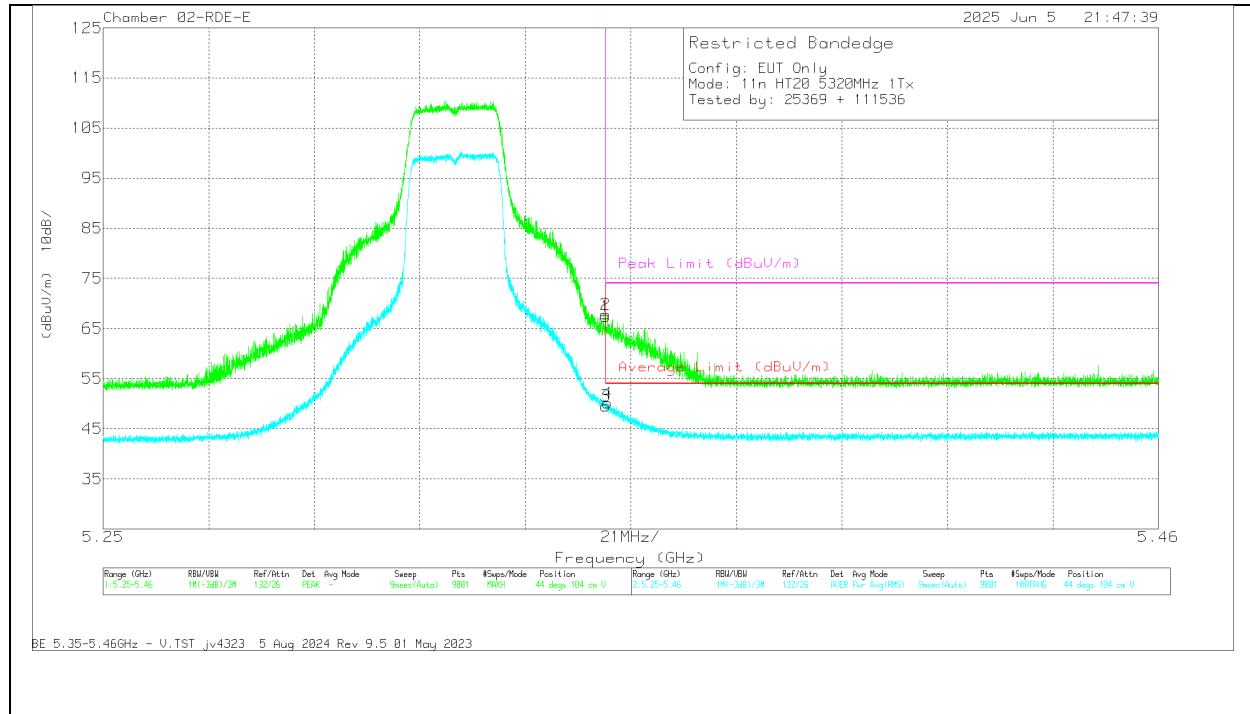BANDEDGE (HIGH CHANNEL / 5320MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	70.89	Pk	34.8	0	-38.22	67.47	-	-	74	-6.53	44	104	V
2	* 5.350005	71.28	Pk	34.8	0	-38.22	67.86	-	-	74	-6.14	44	104	V
3	* 5.35	52.9	RMS	34.8	0	-38.22	49.48	54	-4.52	-	-	44	104	V
4	* 5.350332	53.51	RMS	34.8	0	-38.21	50.1	54	-3.9	-	-	44	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


1.1.10. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6 + 5	* 5.35	69.45	Pk	34.8	-38.22	0	66.03	-	-	74	-7.97	142	199	H
			* 5.350379	70.54	Pk	34.8	-38.2	0	67.14	-	-	74	-6.86	142	199	H
			* 5.35	52.66	RMS	34.8	-38.22	0	49.24	54	-4.76	-	-	142	199	H
			* 5.350449	53.03	RMS	34.8	-38.2	0	49.63	54	-4.37	-	-	142	199	H
			* 5.35	69.98	Pk	34.8	-38.22	0	66.56	-	-	74	-7.44	38	106	V
			* 5.350239	72.2	Pk	34.8	-38.21	0	68.79	-	-	74	-5.21	38	106	V
			* 5.35	53.65	RMS	34.8	-38.22	0	50.23	54	-3.77	-	-	38	106	V
			* 5.350239	54.25	RMS	34.8	-38.21	0	50.84	54	-3.16	-	-	38	106	V
HT40	5310	6 + 5	* 5.35	56.21	Pk	34.5	-23.6	0	67.11	-	-	74	-6.89	273	144	H
			* 5.350892	58.17	Pk	34.5	-23.7	0	68.97	-	-	74	-5.03	273	144	H
			* 5.35	34.98	RMS	34.5	-23.6	0	45.88	54	-8.12	-	-	273	144	H
			* 5.350915	37.58	RMS	34.5	-23.7	0	48.38	54	-5.62	-	-	273	144	H
			* 5.35	50.4	Pk	34.5	-23.6	0	61.3	-	-	74	-12.7	173	263	V
			* 5.352035	57.55	Pk	34.5	-23.7	0	68.35	-	-	74	-5.65	173	263	V
			* 5.35	34.03	RMS	34.5	-23.6	0	44.93	54	-9.07	-	-	173	263	V
			* 5.350659	36.68	RMS	34.5	-23.7	0	47.48	54	-6.52	-	-	173	263	V
VHT80	5290	6 + 5	* 5.35	49.53	Pk	34.5	-23.6	0	60.43	-	-	74	-13.57	123	147	H
			* 5.368112	58.29	Pk	34.6	-23.9	0	68.99	-	-	74	-5.01	123	147	H
			* 5.35	32.56	RMS	34.5	-23.6	0	43.46	54	-10.54	-	-	123	147	H
			* 5.353085	38.02	RMS	34.5	-23.7	0	48.82	54	-5.18	-	-	123	147	H
			* 5.35	45.49	Pk	34.5	-23.6	0	56.39	-	-	74	-17.61	91	112	V
			* 5.367948	56.7	Pk	34.6	-23.9	0	67.4	-	-	74	-6.6	91	112	V
			* 5.35	31.47	RMS	34.5	-23.6	0	42.37	54	-11.63	-	-	91	112	V
			* 5.358475	36.19	RMS	34.5	-23.8	0	46.89	54	-7.11	-	-	91	112	V
VHT160	5250 (Upper)	6 + 5	* 5.35	41.37	Pk	34.5	-23.6	0	52.27	-	-	74	-21.73	91	131	H
			* 5.403228	58.66	Pk	34.6	-24	0	69.26	-	-	74	-4.74	91	131	H
			* 5.35	30.45	RMS	34.5	-23.6	0.11	41.46	54	-12.54	-	-	91	131	H
			* 5.398375	35.84	RMS	34.6	-24.1	0.11	46.45	54	-7.55	-	-	91	131	H
			* 5.35	39.63	Pk	34.5	-23.6	0	50.53	-	-	74	-23.47	91	113	V
			* 5.402831	57.4	Pk	34.6	-24.1	0	67.9	-	-	74	-6.1	91	113	V
			* 5.35	28.94	RMS	34.5	-23.6	0.11	39.95	54	-14.05	-	-	91	113	V
			* 5.397185	34.91	RMS	34.6	-24.1	0.11	45.52	54	-8.48	-	-	91	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

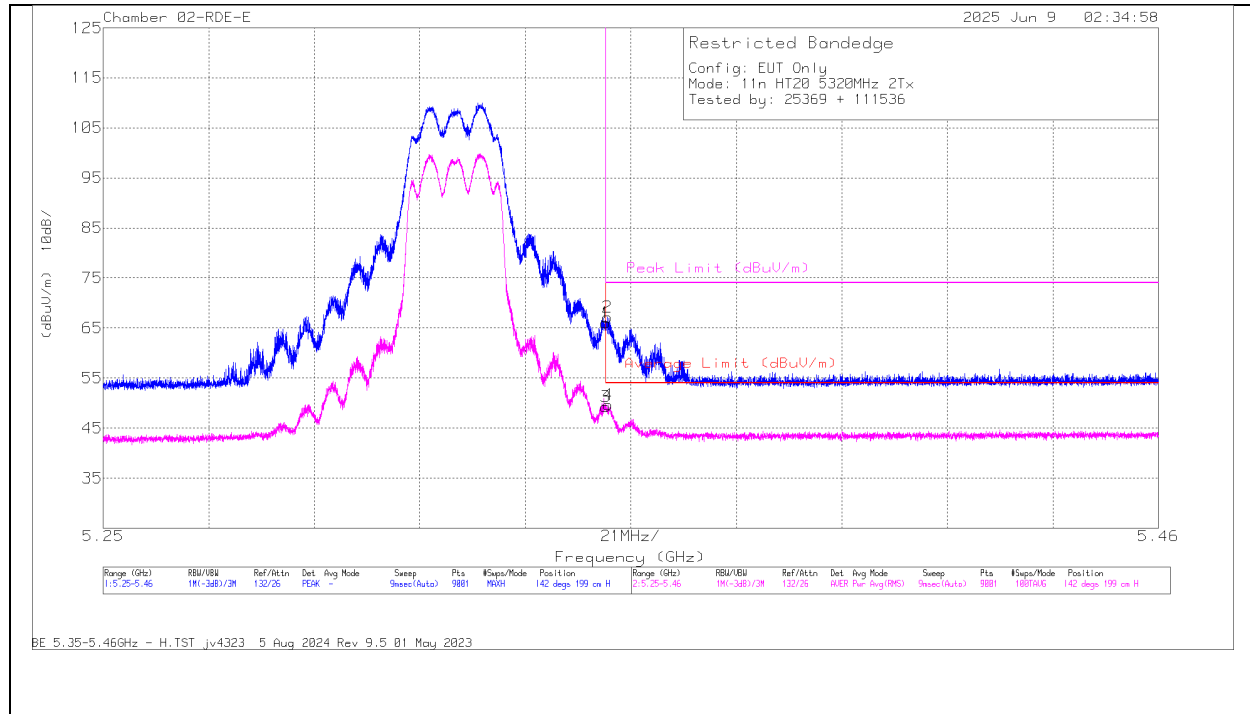
BANDEDGE (HIGH CHANNEL / 5320MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	69.45	Pk	34.8	0	-38.22	66.03	-	-	74	-7.97	142	199	H
2	* 5.350379	70.54	Pk	34.8	0	-38.2	67.14	-	-	74	-6.86	142	199	H
3	* 5.35	52.66	RMS	34.8	0	-38.22	49.24	54	-4.76	-	-	142	199	H
4	* 5.350449	53.03	RMS	34.8	0	-38.2	49.63	54	-4.37	-	-	142	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

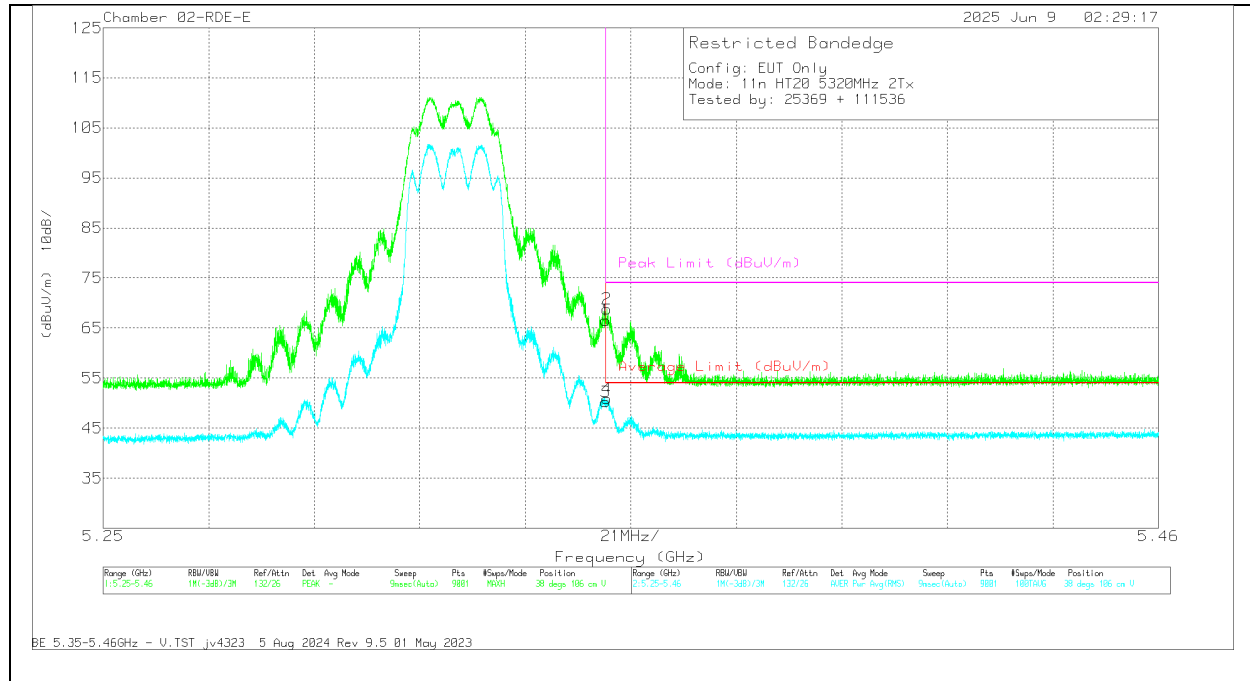BANDEDGE (HIGH CHANNEL / 5320MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	69.98	PK	34.8	0	-38.22	66.56	-	-	74	-7.44	38	106	V
2	* 5.350239	72.2	PK	34.8	0	-38.21	68.79	-	-	74	-5.21	38	106	V
3	* 5.35	53.65	RMS	34.8	0	-38.22	50.23	54	-3.77	-	-	38	106	V
4	* 5.350239	54.25	RMS	34.8	0	-38.21	50.84	54	-3.16	-	-	38	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.1.11. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6	* 5.35	55.37	Pk	34.5	-23.6	0	66.27	-	-	74	-7.73	90	180	H
			* 5.351289	56.87	Pk	34.5	-23.7	0	67.67	-	-	74	-6.33	90	180	H
			* 5.35	39.32	RMS	34.5	-23.6	0	50.22	54	-3.78	-	-	90	180	H
			* 5.350145	39.9	RMS	34.5	-23.6	0	50.8	54	-3.2	-	-	90	180	H
			* 5.35	55.12	Pk	34.5	-23.6	0	66.02	-	-	74	-7.98	69	131	V
			* 5.350542	56.84	Pk	34.5	-23.7	0	67.64	-	-	74	-6.36	69	131	V
		5	* 5.35	38.18	RMS	34.5	-23.6	0	49.08	54	-4.92	-	-	69	131	V
			* 5.350565	38.76	RMS	34.5	-23.7	0	49.56	54	-4.44	-	-	69	131	V
			* 5.350	62.6	Pk	34.6	-30.5	0	66.7	-	-	74	-7.3	152	162	H
			* 5.350339	64.29	Pk	34.6	-30.5	0	68.39	-	-	74	-5.61	152	162	H
			* 5.350	45.58	RMS	34.6	-30.5	0	49.68	54	-4.32	-	-	152	162	H
			* 5.350523	46.66	RMS	34.6	-30.5	0	50.76	54	-3.24	-	-	152	162	H
			* 5.350	58.46	Pk	34.6	-30.5	0	62.56	-	-	74	-11.44	109	232	V
			* 5.350024	60.76	Pk	34.6	-30.5	0	64.86	-	-	74	-9.14	109	232	V
			* 5.350	43.48	RMS	34.6	-30.5	0	47.58	54	-6.42	-	-	109	232	V
			* 5.350103	43.93	RMS	34.6	-30.5	0	48.03	54	-5.97	-	-	109	232	V
EHT40 (SU Mode)	5310	6	* 5.35	69.34	Pk	34.5	-35	0	68.84	-	-	74	-5.16	58	106	H
			* 5.350313	69.7	Pk	34.5	-35	0	69.2	-	-	74	-4.8	58	106	H
			* 5.35	46.02	RMS	34.5	-35	0	45.52	54	-8.48	-	-	58	106	H
			* 5.350024	47.84	RMS	34.5	-35	0	47.34	54	-6.66	-	-	58	106	H
			* 5.35	69.9	Pk	34.5	-35	0	69.4	-	-	74	-4.6	78	104	V
			* 5.35005	69.97	Pk	34.5	-35	0	69.47	-	-	74	-4.53	78	104	V
		5	* 5.35	45.9	RMS	34.5	-35	0	45.4	54	-8.6	-	-	78	104	V
			* 5.351415	49.35	RMS	34.5	-35	0	48.85	54	-5.15	-	-	78	104	V
			* 5.35	45.81	Pk	34.3	-16.9	0	63.21	-	-	74	-10.79	231	140	H
			* 5.351415	51.11	Pk	34.3	-16.8	0	68.61	-	-	74	-5.39	231	140	H
			* 5.35	30.5	RMS	34.3	-16.9	0	47.9	54	-6.1	-	-	231	140	H
			* 5.353358	31.28	RMS	34.3	-16.8	0	48.78	54	-5.22	-	-	231	140	H
			* 5.35	45.35	Pk	34.3	-16.9	0	62.75	-	-	74	-11.25	186	116	V
			* 5.350076	49.13	Pk	34.3	-16.9	0	66.53	-	-	74	-7.47	186	116	V
			* 5.35	29.18	RMS	34.3	-16.9	0	46.58	54	-7.42	-	-	186	116	V
			* 5.354723	29.99	RMS	34.3	-16.8	0	47.49	54	-6.51	-	-	186	116	V
EHT80 (SU Mode)	5290	6	* 5.35	48.87	Pk	34.3	-16.9	0	66.27	-	-	74	-7.73	127	125	H
			* 5.350103	51.51	Pk	34.3	-16.9	0	68.91	-	-	74	-5.09	127	125	H
			* 5.35	32.83	RMS	34.3	-16.9	0	50.23	54	-3.77	-	-	127	125	H
			* 5.351127	33.96	RMS	34.3	-16.8	0	51.46	54	-2.54	-	-	127	125	H
			* 5.35	50.09	Pk	34.3	-16.9	0	67.49	-	-	74	-6.51	110	112	V
			* 5.350496	51.63	Pk	34.3	-16.9	0	69.03	-	-	74	-4.97	110	112	V
		5	* 5.35	32.91	RMS	34.3	-16.9	0	50.31	54	-3.69	-	-	110	112	V
			* 5.352886	33.49	RMS	34.3	-16.8	0	50.99	54	-3.01	-	-	110	112	V
			* 5.35	54.99	Pk	34.5	-23.6	0	65.89	-	-	74	-8.11	273	135	H
			* 5.361158	58.22	Pk	34.5	-23.8	0	68.92	-	-	74	-5.08	273	135	H
			* 5.35	35.64	RMS	34.5	-23.6	0	46.54	54	-7.46	-	-	273	135	H
			* 5.351615	37.56	RMS	34.5	-23.7	0	48.36	54	-5.64	-	-	273	135	H
			* 5.35	50.75	Pk	34.5	-23.6	0	61.65	-	-	74	-12.35	244	192	V
			* 5.361508	53.99	Pk	34.5	-23.8	0	64.69	-	-	74	-9.31	244	192	V
			* 5.35	32.49	RMS	34.5	-23.6	0	43.39	54	-10.61	-	-	244	192	V
			* 5.354112	34.08	RMS	34.5	-23.7	0	44.88	54	-9.12	-	-	244	192	V
EHT160 (SU Mode)	5250 (Upper)	6	* 5.35	54.67	Pk	34.5	-23.6	0	65.57	-	-	74	-8.43	88	175	H
			* 5.353575	58.5	Pk	34.5	-23.7	0	69.3	-	-	74	-4.7	88	175	H
			* 5.35	38.4	RMS	34.5	-23.6	0.14	49.44	54	-4.56	-	-	88	175	H
			* 5.398445	40.43	RMS	34.6	-24.1	0.14	51.07	54	-2.93	-	-	88	175	H
			* 5.35	53.11	Pk	34.5	-23.6	0	64.01	-	-	74	-9.99	79	101	V
			* 5.350589	57.07	Pk	34.5	-23.7	0	67.87	-	-	74	-6.13	79	101	V
		5	* 5.35	36.93	RMS	34.5	-23.6	0.14	47.97	54	-6.03	-	-	79	101	V
			* 5.396158	39.98	RMS	34.6	-24.1	0.14	50.62	54	-3.38	-	-	79	101	V
			* 5.35	54.1	Pk	34.5	-23.6	0	65	-	-	74	-9	278	124	H
			* 5.355139	58.41	Pk	34.5	-23.7	0	69.21	-	-	74	-4.79	278	124	H
			* 5.35	37.07	RMS	34.5	-23.6	0.14	48.11	54	-5.89	-	-	278	124	H
			* 5.399005	40.34	RMS	34.6	-24.1	0.14	50.98	54	-3.02	-	-	278	124	H
			* 5.35	53.65	Pk	34.5	-23.6	0	64.55	-	-	74	-9.45	248	207	V
			* 5.350075	55.4	Pk	34.5	-23.6	0	66.3	-	-	74	-7.7	248	207	V
			* 5.35	35.27	RMS	34.5	-23.6	0.14	46.31	54	-7.69	-	-	248	207	V
			* 5.358148	36.9	RMS	34.5	-23.8	0.14	47.74	54	-6.26	-	-	248	207	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE

HORIZONTAL RESULT

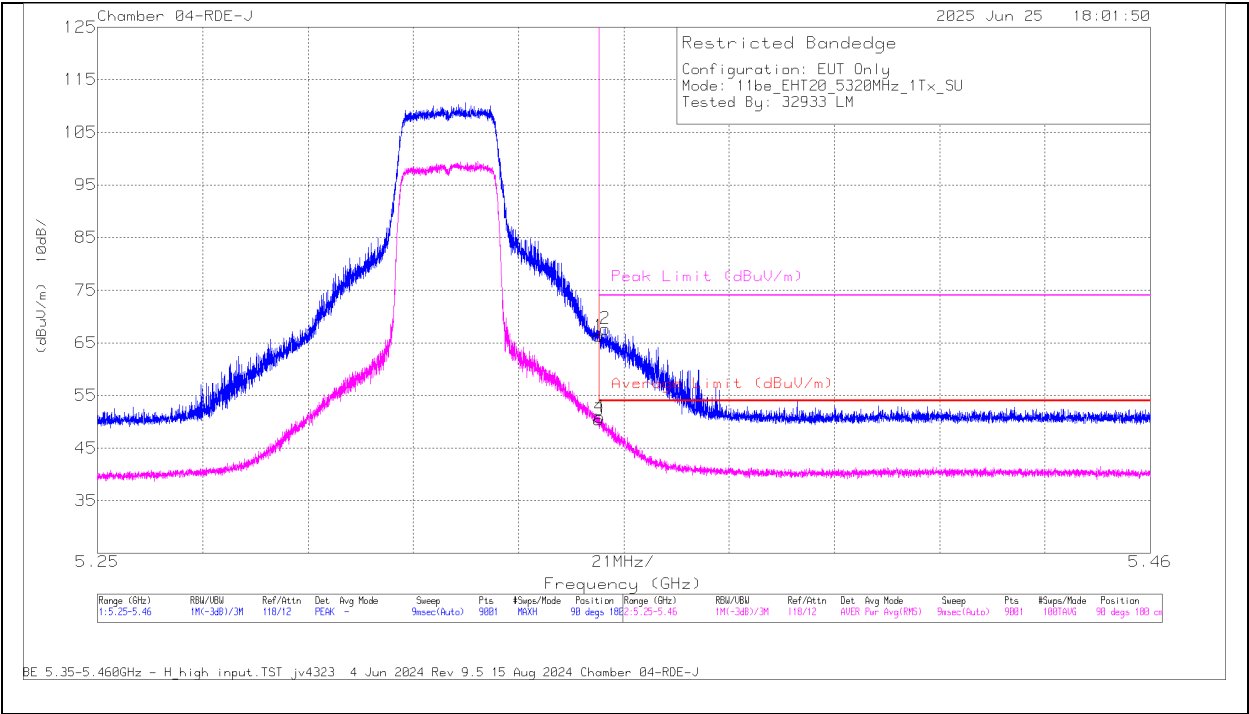

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 5.35	55.37	Pk	34.5	-23.6	0	66.27	-	-	74	-7.73	90	180	H
2	* 5.351289	56.87	Pk	34.5	-23.7	0	67.67	-	-	74	-6.33	90	180	H
3	* 5.35	39.32	RMS	34.5	-23.6	0	50.22	54	-3.78	-	-	90	180	H
4	* 5.350145	39.9	RMS	34.5	-23.6	0	50.8	54	-3.2	-	-	90	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

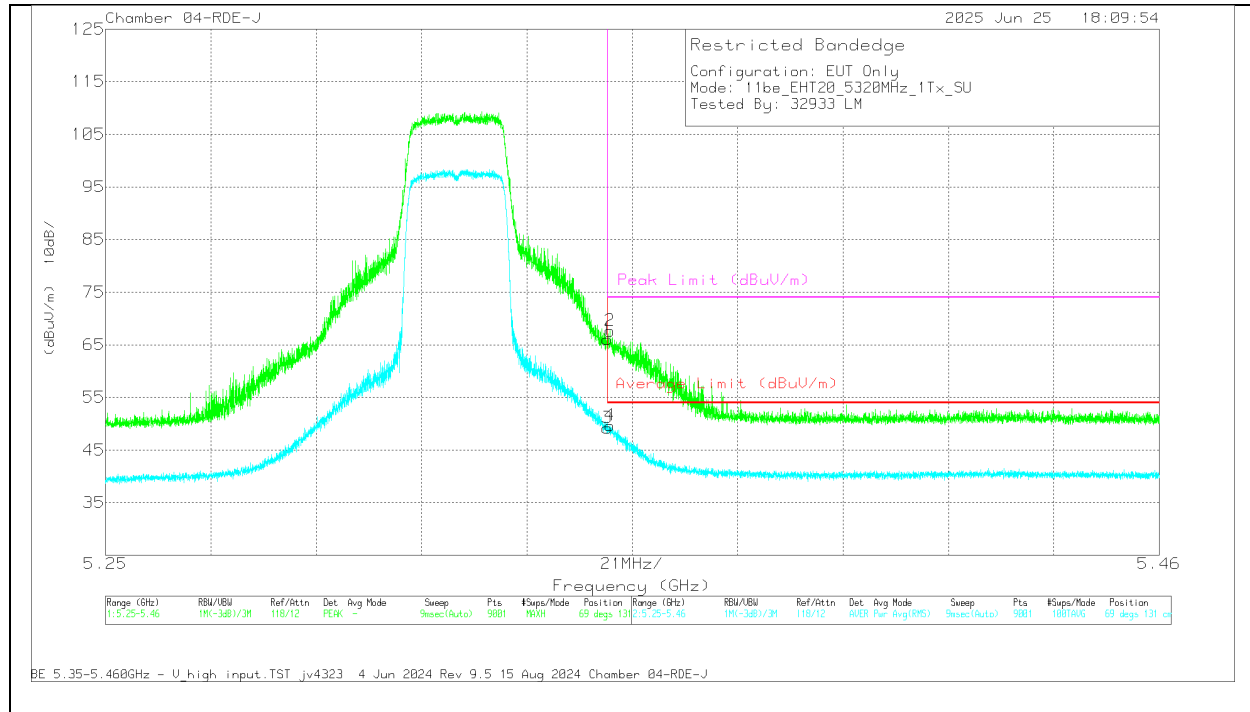BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	55.12	Pk	34.5	-23.6	0	66.02	-	-	74	-7.98	69	131	V
2	* 5.350542	56.84	Pk	34.5	-23.7	0	67.64	-	-	74	-6.36	69	131	V
3	* 5.35	38.18	RMS	34.5	-23.6	0	49.08	54	-4.92	-	-	69	131	V
4	* 5.350565	38.76	RMS	34.5	-23.7	0	49.56	54	-4.44	-	-	69	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 40)	5320	6	* 5.35	59.16	Pk	34.4	-35.8	0	57.76	-	-	74	-16.24	160	237	H
			* 5.350099	62.05	Pk	34.4	-35.81	0	60.64	-	-	74	-13.36	160	237	H
			* 5.35	45.28	RMS	34.4	-35.8	0	43.88	54	-10.12	-	-	160	237	H
			* 5.393008	46.24	RMS	34.4	-35.4	0	45.24	54	-8.76	-	-	160	237	H
			* 5.35	59.39	Pk	34.4	-35.8	0	57.99	-	-	74	-16.01	131	184	V
			* 5.350799	61.61	Pk	34.4	-35.88	0	60.13	-	-	74	-13.87	131	184	V
		5	* 5.35	45.84	RMS	34.4	-35.8	0	44.44	54	-9.56	-	-	131	184	V
			* 5.389625	46.06	RMS	34.4	-35.4	0	45.06	54	-8.94	-	-	131	184	V
			5.35	57.74	Pk	34.5	-36.55	0	55.69	-	-	74	-18.31	276	160	H
			5.35	45.32	RMS	34.5	-36.55	0	43.27	54	-10.73	-	-	276	160	H
			5.359198	46.74	RMS	34.6	-36.57	0	44.77	54	-9.23	-	-	276	160	H
			5.426724	58.64	Pk	34.6	-36.53	0	56.71	-	-	74	-17.29	276	160	H
			5.35	57.44	Pk	34.5	-36.55	0	55.39	-	-	74	-18.61	163	109	V
			5.35	45.61	RMS	34.5	-36.55	0	43.56	54	-10.44	-	-	163	109	V
			5.383278	58.83	Pk	34.6	-36.61	0	56.82	-	-	74	-17.18	163	109	V
			5.383395	46.84	RMS	34.6	-36.62	0	44.82	54	-9.18	-	-	163	109	V
EHT40 (242T / Index 62)	5310	6	* 5.350	53.86	Pk	34.6	-23.03	0	65.43	-	-	74	-8.57	242	135	H
			* 5.350402	55.11	Pk	34.6	-23.04	0	66.67	-	-	74	-7.33	242	135	H
			* 5.350	36.51	RMS	34.6	-23.03	0	48.08	54	-5.92	-	-	242	135	H
			* 5.350075	36.84	RMS	34.6	-23.03	0	48.41	54	-5.59	-	-	242	135	H
			* 5.350	49.81	Pk	34.6	-23.03	0	61.38	-	-	74	-12.62	207	121	V
			* 5.350425	53.68	Pk	34.6	-23.04	0	65.24	-	-	74	-8.76	207	121	V
		5	* 5.350	35.23	RMS	34.6	-23.03	0	46.8	54	-7.2	-	-	207	121	V
			* 5.350192	36.07	RMS	34.6	-23.04	0	47.63	54	-6.37	-	-	207	121	V
			5.35	64.72	Pk	34.6	-37.99	0	61.33	-	-	74	-12.67	85	141	H
			5.35	50.09	RMS	34.6	-37.99	0	46.7	54	-7.3	-	-	85	141	H
			5.350075	51.21	RMS	34.6	-37.99	0	47.82	54	-6.18	-	-	85	141	H
			5.350122	70.04	Pk	34.6	-37.99	0	66.65	-	-	74	-7.35	85	141	H
			5.35	62.58	Pk	34.6	-37.99	0	59.19	-	-	74	-14.81	149	129	V
			5.35	47.66	RMS	34.6	-37.99	0	44.27	54	-9.73	-	-	149	129	V
			5.350215	64.75	Pk	34.6	-38	0	61.35	-	-	74	-12.65	149	129	V
			5.350239	49.15	RMS	34.6	-38	0	45.75	54	-8.25	-	-	149	129	V
EHT40 ((106+26)T / Index 85)	5310	6	* 5.350	53.6	Pk	34.6	-30.5	0	57.7	-	-	74	-16.3	73	283	H
			* 5.350943	55.91	Pk	34.6	-30.5	0	60.01	-	-	74	-13.99	73	283	H
			* 5.350	40.18	RMS	34.6	-30.5	0	44.28	54	-9.72	-	-	73	283	H
			* 5.350181	41.16	RMS	34.6	-30.5	0	45.26	54	-8.74	-	-	73	283	H
			* 5.350	58.2	Pk	34.6	-30.5	0	62.3	-	-	74	-11.7	40	256	V
			* 5.350155	55.37	Pk	34.6	-30.5	0	59.47	-	-	74	-14.53	40	256	V
		5	* 5.350	40	RMS	34.6	-30.5	0	44.1	54	-9.9	-	-	40	256	V
			* 5.351625	40.95	RMS	34.6	-30.5	0	45.05	54	-8.95	-	-	40	256	V
			5.35	64.03	Pk	34.6	-37.99	0	60.64	-	-	74	-13.36	149	141	H
			5.35	48.01	RMS	34.6	-37.99	0	44.62	54	-9.38	-	-	149	141	H
			5.350029	66.79	Pk	34.6	-37.99	0	63.4	-	-	74	-10.6	149	141	H
			5.350985	48.32	RMS	34.6	-38.02	0	44.9	54	-9.1	-	-	149	141	H
			5.35	61.88	Pk	34.6	-37.99	0	58.49	-	-	74	-15.51	132	127	V
			5.35	46.83	RMS	34.6	-37.99	0	43.44	54	-10.56	-	-	132	127	V
			5.350122	64.04	Pk	34.6	-37.99	0	60.65	-	-	74	-13.35	132	127	V
			5.400825	47.28	RMS	34.7	-37.69	0	44.29	54	-9.71	-	-	132	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 66)	5290	6	* 5.35	69.56	Pk	34.4	-35.8	0	68.16	-	-	74	-5.84	5	215	H
			* 5.350075	70.42	Pk	34.4	-35.81	0	69.01	-	-	74	-4.99	5	215	H
			* 5.35	49.8	RMS	34.4	-35.8	0	48.4	54	-5.6	-	-	5	215	H
			* 5.353925	50.12	RMS	34.4	-35.8	0	48.72	54	-5.28	-	-	5	215	H
			* 5.35	69	Pk	34.4	-35.8	0	67.6	-	-	74	-6.4	345	111	V
			* 5.350169	69.96	Pk	34.4	-35.82	0	68.54	-	-	74	-5.46	345	111	V
		5	* 5.35	48.49	RMS	34.4	-35.8	0	47.09	54	-6.91	-	-	345	111	V
			* 5.350869	50.22	RMS	34.4	-35.89	0	48.73	54	-5.27	-	-	345	111	V
			* 5.350	50.36	Pk	34.6	-23.03	0	61.93	-	-	74	-12.07	82	401	H
			* 5.351335	51.77	Pk	34.6	-23.07	0	63.3	-	-	74	-10.7	82	401	H
			* 5.350	34.18	RMS	34.6	-23.03	0	45.75	54	-8.25	-	-	82	401	H
			* 5.350262	35.19	RMS	34.6	-23.04	0	46.75	54	-7.25	-	-	82	401	H
			* 5.350	49.8	Pk	34.6	-23.03	0	61.37	-	-	74	-12.63	30	401	V
			* 5.351639	52.03	Pk	34.6	-23.08	0	63.55	-	-	74	-10.45	30	401	V
			* 5.350	34.52	RMS	34.6	-23.03	0	46.09	54	-7.91	-	-	30	401	V
			* 5.350029	35.46	RMS	34.6	-23.03	0	47.03	54	-6.97	-	-	30	401	V
EHT80 (52T / Index 52)	5290	6	* 5.35	63.94	Pk	34.4	-35.8	0	62.54	-	-	74	-11.46	15	222	H
			* 5.350402	65.13	Pk	34.4	-35.84	0	63.69	-	-	74	-10.31	15	222	H
			* 5.35	45.88	RMS	34.4	-35.8	0.16	44.64	54	-9.36	-	-	15	222	H
			* 5.414358	46.58	RMS	34.4	-35.6	0.16	45.54	54	-8.46	-	-	15	222	H
			* 5.35	62.68	Pk	34.4	-35.8	0	61.28	-	-	74	-12.72	340	126	V
			* 5.350192	65.5	Pk	34.4	-35.82	0	64.08	-	-	74	-9.92	340	126	V
		5	* 5.35	45.41	RMS	34.4	-35.8	0.16	44.17	54	-9.83	-	-	340	126	V
			* 5.350752	47.05	RMS	34.4	-35.88	0.16	45.73	54	-8.27	-	-	340	126	V
			* 5.350	41.2	Pk	34.6	-23.03	0	52.77	-	-	74	-21.23	141	113	H
			* 5.426654	42.75	Pk	34.6	-23.35	0	54	-	-	74	-20	141	113	H
			* 5.350	28.51	RMS	34.6	-23.03	0.16	40.24	54	-13.76	-	-	141	113	H
			* 5.350635	29.61	RMS	34.6	-23.05	0.16	41.32	54	-12.68	-	-	141	113	H
			* 5.350	39.99	Pk	34.6	-23.03	0	51.56	-	-	74	-22.44	30	357	V
			* 5.355488	41.95	Pk	34.6	-23.13	0	53.42	-	-	74	-20.58	30	357	V
			* 5.350	28.49	RMS	34.6	-23.03	0.16	40.22	54	-13.78	-	-	30	357	V
			* 5.350332	29.89	RMS	34.6	-23.04	0.16	41.61	54	-12.39	-	-	30	357	V
EHT160 (242T / Index S64)	5250 (Upper)	6	5.35	66.59	Pk	34.5	-39.05	0	62.04	-	-	74	-11.96	243	231	H
			5.35	51.42	RMS	34.5	-39.05	0.1	46.97	54	-7.03	-	-	243	231	H
			5.350099	67.55	Pk	34.5	-39.05	0	63	-	-	74	-11	243	231	H
			5.350099	52.64	RMS	34.5	-39.05	0.1	48.19	54	-5.81	-	-	243	231	H
			5.35	66.66	Pk	34.5	-39.05	0	62.11	-	-	74	-11.89	172	287	V
			5.35	51.27	RMS	34.5	-39.05	0.1	46.82	54	-7.18	-	-	172	287	V
		5	5.350355	68.54	Pk	34.5	-39.04	0	64	-	-	74	-10	172	287	V
			5.350355	51.68	RMS	34.5	-39.04	0.1	47.24	54	-6.76	-	-	172	287	V
			* 5.35	56.95	Pk	34.5	-37.27	0	54.18	-	-	74	-19.82	36	165	H
			* 5.449987	59.49	Pk	34.6	-37	0	57.09	-	-	74	-16.91	36	165	H
			* 5.35	45.87	RMS	34.5	-37.27	0.1	43.2	54	-10.8	-	-	36	165	H
			* 5.431484	47.16	RMS	34.6	-37	0.1	44.86	54	-9.14	-	-	36	165	H
			* 5.35	56.17	Pk	34.5	-37.27	0	53.4	-	-	74	-20.6	85	190	V
			* 5.384888	59.51	Pk	34.5	-37.12	0	56.89	-	-	74	-17.11	85	190	V
			* 5.35	46.03	RMS	34.5	-37.27	0.1	43.36	54	-10.64	-	-	85	190	V
			* 5.415174	47.06	RMS	34.6	-37.05	0.1	44.71	54	-9.29	-	-	85	190	V
EHT160 (52T / Index S52)	5250 (Upper)	6	* 5.35	60.43	Pk	34.6	-38	0	57.03	-	-	74	-16.97	232	106	H
			* 5.350775	62.48	Pk	34.6	-38	0	59.08	-	-	74	-14.92	232	106	H
			* 5.35	46.53	RMS	34.6	-38	0.2	43.33	54	-10.67	-	-	232	106	H
			* 5.360575	47.45	RMS	34.6	-37.9	0.2	44.35	54	-9.65	-	-	232	106	H
			* 5.35	66.17	Pk	34.6	-38	0	62.77	-	-	74	-11.23	221	104	V
			* 5.350775	67.87	Pk	34.6	-38	0	64.47	-	-	74	-9.53	221	104	V
		5	* 5.35	52.94	RMS	34.6	-38	0.2	49.74	54	-4.26	-	-	221	104	V
			* 5.350169	53.96	RMS	34.6	-38	0.2	50.76	54	-3.24	-	-	221	104	V
			* 5.35	59.36	Pk	34.5	-37.27	0	56.59	-	-	74	-17.41	88	212	H
			* 5.350519	60.9	Pk	34.5	-37.25	0	58.15	-	-	74	-15.85	88	212	H
			* 5.35	46.04	RMS	34.5	-37.27	0.2	43.47	54	-10.53	-	-	88	212	H
			* 5.452134	47.55	RMS	34.6	-37	0.2	45.35	54	-8.65	-	-	88	212	H
			* 5.35	57.53	Pk	34.5	-37.27	0	54.76	-	-	74	-19.24	32	215	V
			* 5.45512	59.09	Pk	34.6	-37	0	56.69	-	-	74	-17.31	32	215	V
			* 5.35	46.31	RMS	34.5	-37.27	0.2	43.74	54	-10.26	-	-	32	215	V
			* 5.446767	47.04	RMS	34.6	-36.95	0.2	44.89	54	-9.11	-	-	32	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

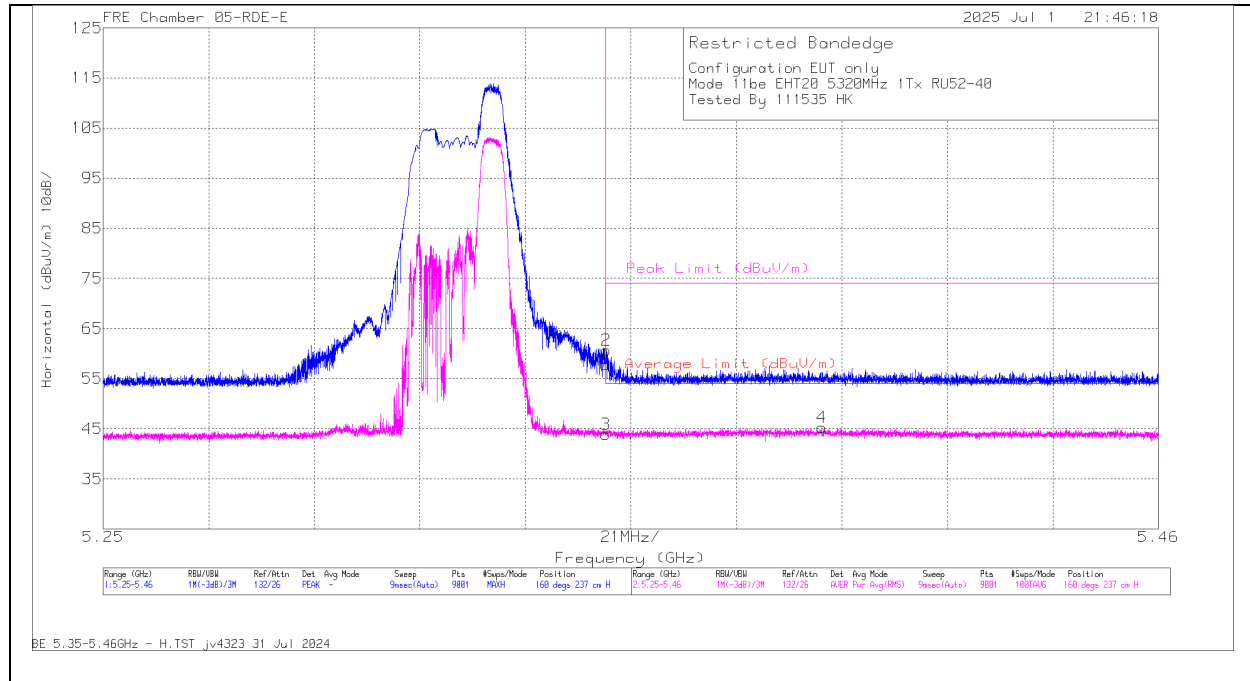BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	59.16	Pk	34.4	0	-35.8	57.76	-	-	74	-16.24	160	237	H
2	* 5.350099	62.05	Pk	34.4	0	-35.81	60.64	-	-	74	-13.36	160	237	H
3	* 5.35	45.28	RMS	34.4	0	-35.8	43.88	54	-10.12	-	-	160	237	H
4	* 5.393008	46.24	RMS	34.4	0	-35.4	45.24	54	-8.76	-	-	160	237	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

VERTICAL RESULT

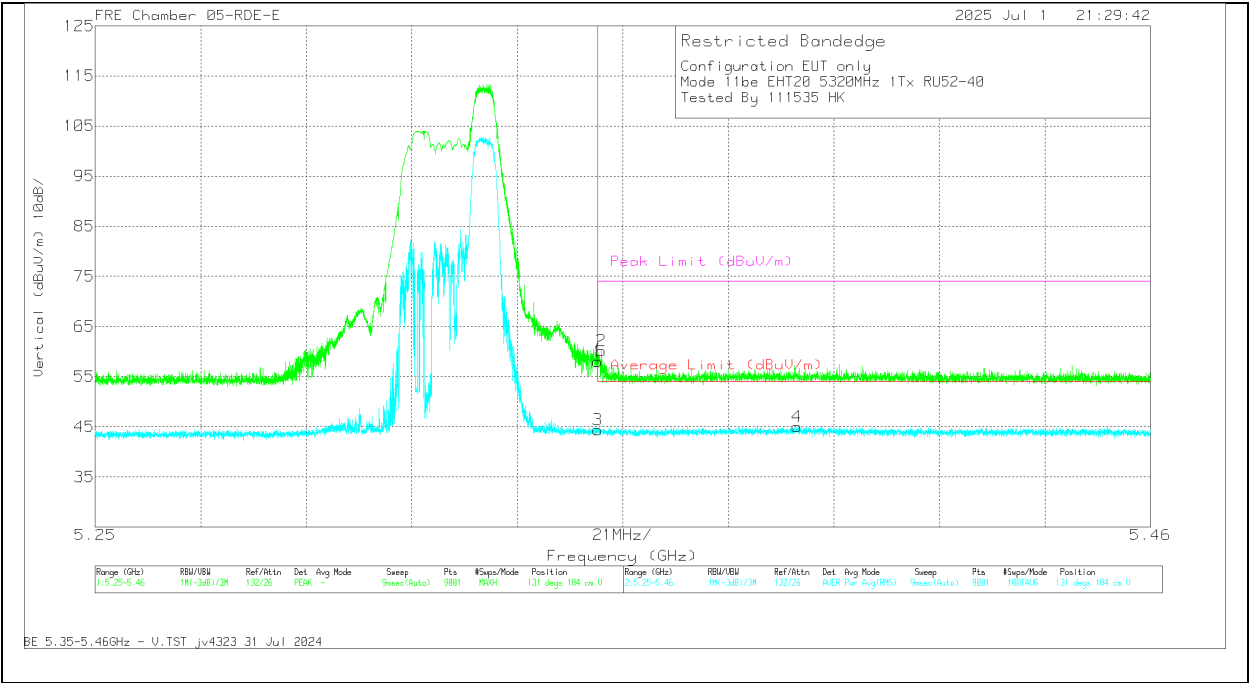

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	59.39	Pk	34.4	0	-35.8	57.99	-	-	74	-16.01	131	184	V
2	* 5.350799	61.61	Pk	34.4	0	-35.88	60.13	-	-	74	-13.87	131	184	V
3	* 5.35	45.84	RMS	34.4	0	-35.8	44.44	54	-9.56	-	-	131	184	V
4	* 5.389625	46.06	RMS	34.4	0	-35.4	45.06	54	-8.94	-	-	131	184	V


1.1.13. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6 + 5	* 5.350	63.93	Pk	34.6	-30.5	0	68.03	-	-	74	-5.97	143	183	H
			* 5.350523	63.66	Pk	34.6	-30.5	0	67.76	-	-	74	-6.24	143	183	H
			* 5.350	44.6	RMS	34.6	-30.5	0	48.7	54	-5.3	-	-	143	183	H
			* 5.350024	44.86	RMS	34.6	-30.5	0	48.96	54	-5.04	-	-	143	183	H
			* 5.350	63.33	Pk	34.6	-30.5	0	67.43	-	-	74	-6.57	37	299	V
			* 5.350155	64.96	Pk	34.6	-30.5	0	69.06	-	-	74	-4.94	37	299	V
			* 5.350	44.76	RMS	34.6	-30.5	0	48.86	54	-5.14	-	-	37	299	V
EHT40 (SU Mode)	5310	6 + 5	* 5.350208	46.37	RMS	34.6	-30.5	0	50.47	54	-3.53	-	-	37	299	V
			* 5.35	42.74	Pk	34.3	-16.9	0	60.14	-	-	74	-13.86	168	176	H
			* 5.353699	51.17	Pk	34.3	-16.8	0	68.67	-	-	74	-5.33	168	176	H
			* 5.35	29.28	RMS	34.3	-16.9	0	46.68	54	-7.32	-	-	168	176	H
			* 5.353043	31.66	RMS	34.3	-16.8	0	49.16	54	-4.84	-	-	168	176	H
			* 5.35	40.44	Pk	34.3	-16.9	0	57.84	-	-	74	-16.16	129	289	V
			* 5.352072	47.81	Pk	34.3	-16.8	0	65.31	-	-	74	-8.69	129	289	V
EHT80 (SU Mode)	5290	6 + 5	* 5.35	27.89	RMS	34.3	-16.9	0	45.29	54	-8.71	-	-	129	289	V
			* 5.352623	31.04	RMS	34.3	-16.8	0	48.54	54	-5.46	-	-	129	289	V
			* 5.35	53.48	Pk	34.5	-23.6	0	64.38	-	-	74	-9.62	218	124	H
			* 5.352922	57.74	Pk	34.5	-23.7	0	68.54	-	-	74	-5.46	218	124	H
			* 5.35	34.36	RMS	34.5	-23.6	0	45.26	54	-8.74	-	-	218	124	H
			* 5.353482	37.75	RMS	34.5	-23.7	0	48.55	54	-5.45	-	-	218	124	H
			* 5.35	46.23	Pk	34.5	-23.6	0	57.13	-	-	74	-16.87	172	254	V
EHT160 (SU Mode)	5250 (Upper)	6 + 5	* 5.352549	55.91	Pk	34.5	-23.7	0	66.71	-	-	74	-7.29	172	254	V
			* 5.35	31.03	RMS	34.5	-23.6	0	41.93	54	-12.07	-	-	172	254	V
			* 5.362395	36.3	RMS	34.5	-23.8	0	47	54	-7	-	-	172	254	V
			* 5.35	51.02	Pk	34.5	-23.6	0	61.92	-	-	74	-12.08	218	155	H
			* 5.353179	58.54	Pk	34.5	-23.7	0	69.34	-	-	74	-4.66	218	155	H
			* 5.35	34.6	RMS	34.5	-23.6	0.14	45.64	54	-8.36	-	-	218	155	H
			* 5.388061	40.61	RMS	34.6	-24.1	0.14	51.25	54	-2.75	-	-	218	155	H
			* 5.35	51.96	Pk	34.5	-23.6	0	62.86	-	-	74	-11.14	180	101	V
			* 5.361905	58.32	Pk	34.5	-23.8	0	69.02	-	-	74	-4.98	180	101	V
			* 5.35	33.47	RMS	34.5	-23.6	0.14	44.51	54	-9.49	-	-	180	101	V
			* 5.392378	40.76	RMS	34.6	-24.1	0.14	51.4	54	-2.6	-	-	180	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

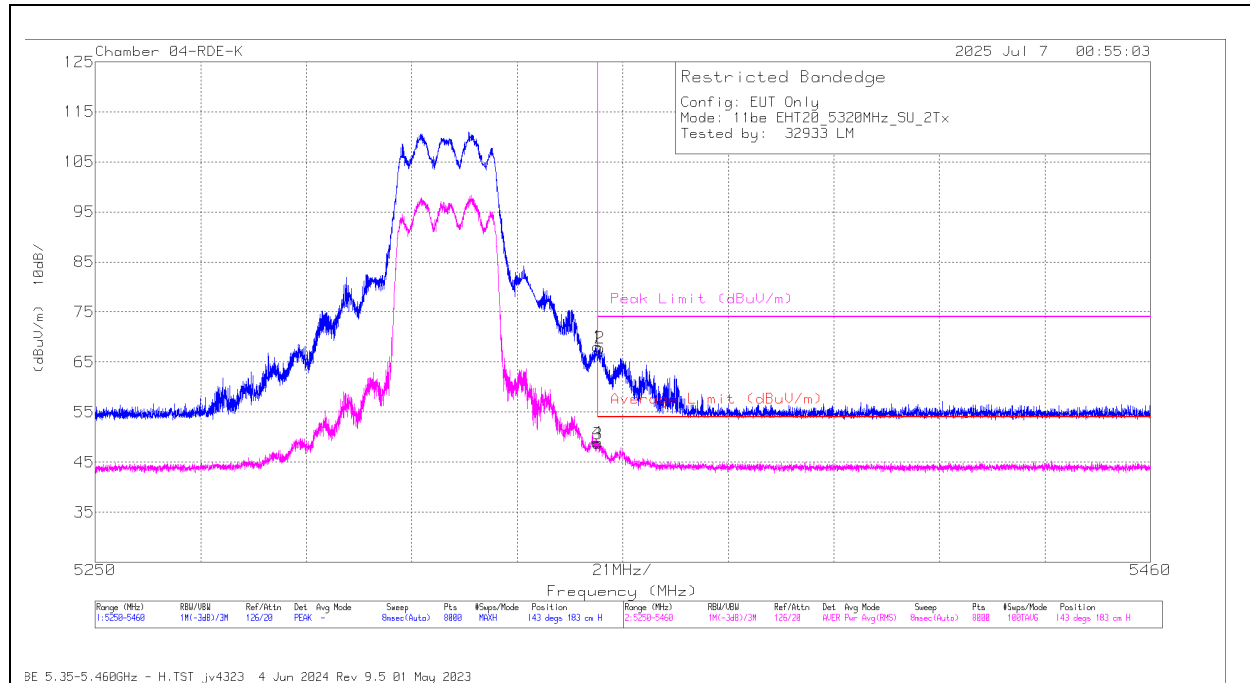BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.350	63.93	Pk	34.6	-30.5	0	68.03	-	-	74	-5.97	143	183	H
2	* 5.350523	63.66	Pk	34.6	-30.5	0	67.76	-	-	74	-6.24	143	183	H
3	* 5.350	44.6	RMS	34.6	-30.5	0	48.7	54	-5.3	-	-	143	183	H
4	* 5.350024	44.86	RMS	34.6	-30.5	0	48.96	54	-5.04	-	-	143	183	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE

VERTICAL RESULT

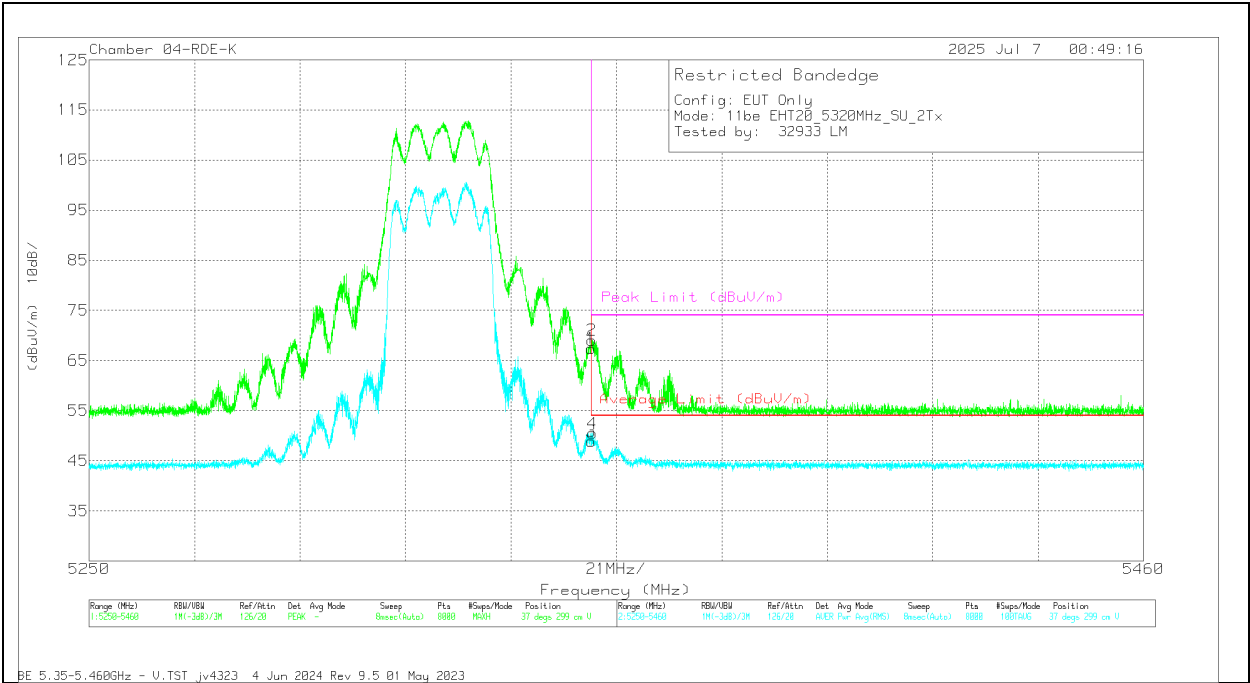

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.350	63.33	Pk	34.6	-30.5	0	67.43	-	-	74	-6.57	37	299	V
2	* 5.350155	64.96	Pk	34.6	-30.5	0	69.06	-	-	74	-4.94	37	299	V
3	* 5.350	44.76	RMS	34.6	-30.5	0	48.86	54	-5.14	-	-	37	299	V
4	* 5.350208	46.37	RMS	34.6	-30.5	0	50.47	54	-3.53	-	-	37	299	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1.1.14. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 40)	5320	6 + 5	5.35	59.56	Pk	34.5	-36.55	0	57.51	-	-	74	-16.49	119	255	H
			5.35	46.02	RMS	34.5	-36.55	0	43.97	54	-10.03	-	-	119	255	H
			5.350309	61.13	Pk	34.5	-36.56	0	59.07	-	-	74	-14.93	119	255	H
			5.360692	46.99	RMS	34.6	-36.57	0	45.02	54	-8.98	-	-	119	255	H
			5.35	59.32	Pk	34.5	-36.55	0	57.27	-	-	74	-16.73	185	322	V
			5.35	45.99	RMS	34.5	-36.55	0	43.94	54	-10.06	-	-	185	322	V
			5.350075	61.58	Pk	34.5	-36.55	0	59.53	-	-	74	-14.47	185	322	V
			5.356655	47.34	RMS	34.6	-36.6	0	45.34	54	-8.66	-	-	185	322	V
EHT40 (242T / Index 62)	5310	6 + 5	* 5.350	50.59	Pk	34.6	-23.03	0	62.16	-	-	74	-11.84	75	196	H
			* 5.350332	52.49	Pk	34.6	-23.04	0	64.05	-	-	74	-9.95	75	196	H
			* 5.350	33.82	RMS	34.6	-23.03	0	45.39	54	-8.61	-	-	75	196	H
			* 5.351825	36.07	RMS	34.6	-23.08	0	47.59	54	-6.41	-	-	75	196	H
			* 5.350	51.36	Pk	34.6	-23.03	0	62.93	-	-	74	-11.07	37	322	V
			* 5.351125	52.73	Pk	34.6	-23.06	0	64.27	-	-	74	-9.73	37	322	V
			* 5.350	34.22	RMS	34.6	-23.03	0	45.79	54	-8.21	-	-	37	322	V
			* 5.351522	35.88	RMS	34.6	-23.08	0	47.4	54	-6.6	-	-	37	322	V
EHT40 (106+26)T / Index 85)	5310	6 + 5	* 5.350	53.44	Pk	34.6	-30.5	0	57.54	-	-	74	-16.46	83	145	H
			* 5.350995	56.44	Pk	34.6	-30.5	0	60.54	-	-	74	-13.46	83	145	H
			* 5.350	39.91	RMS	34.6	-30.5	0	44.01	54	-9.99	-	-	83	145	H
			* 5.350496	41.07	RMS	34.6	-30.5	0	45.17	54	-8.83	-	-	83	145	H
			* 5.350	52.44	Pk	34.6	-30.5	0	56.54	-	-	74	-17.46	49	113	V
			* 5.3511	55.88	Pk	34.6	-30.5	0	59.98	-	-	74	-14.02	49	113	V
			* 5.350	39.95	RMS	34.6	-30.5	0	44.05	54	-9.95	-	-	49	113	V
			* 5.354933	40.91	RMS	34.6	-30.5	0	45.01	54	-8.99	-	-	49	113	V
EHT80 (484T / Index 66)	5290	6 + 5	* 5.350	67.47	Pk	34.6	-35.89	0	66.18	-	-	74	-7.82	215	126	H
			* 5.351195	68.16	Pk	34.6	-35.95	0	66.81	-	-	74	-7.19	215	126	H
			* 5.350	47.13	RMS	34.6	-35.89	0	45.84	54	-8.16	-	-	215	126	H
			* 5.351429	49.91	RMS	34.6	-35.97	0	48.54	54	-5.46	-	-	215	126	H
			* 5.350	64.89	Pk	34.6	-35.89	0	63.6	-	-	74	-10.4	206	202	V
			* 5.350099	66.68	Pk	34.6	-35.89	0	65.39	-	-	74	-8.61	206	202	V
			* 5.350	46.61	RMS	34.6	-35.89	0	45.32	54	-8.68	-	-	206	202	V
			* 5.350379	47.74	RMS	34.6	-35.91	0	46.43	54	-7.57	-	-	206	202	V
EHT80 (52T / Index 52)	5290	6 + 5	* 5.350	58.6	Pk	34.6	-35.89	0	57.31	-	-	74	-16.69	250	101	H
			* 5.350029	60.09	Pk	34.6	-35.89	0	58.8	-	-	74	-15.2	250	101	H
			* 5.350	45.51	RMS	34.6	-35.89	0.16	44.38	54	-9.62	-	-	250	101	H
			* 5.407358	46.34	RMS	34.6	-36.1	0.16	45	54	-9	-	-	250	101	H
			* 5.350	57.95	Pk	34.6	-35.89	0	56.66	-	-	74	-17.34	215	285	V
			* 5.350285	59.37	Pk	34.6	-35.9	0	58.07	-	-	74	-15.93	215	285	V
			* 5.350	45.4	RMS	34.6	-35.89	0.16	44.27	54	-9.73	-	-	215	285	V
			* 5.351662	46.43	RMS	34.6	-35.99	0.16	45.2	54	-8.8	-	-	215	285	V
EHT160 (242T / Index S64)	5250 (Upper)	6 + 5	5.35	65.67	Pk	34.5	-36.55	0	63.62	-	-	74	-10.38	180	117	H
			5.35	50	RMS	34.5	-36.55	0.1	48.05	54	-5.95	-	-	180	117	H
			5.350122	69.07	Pk	34.5	-36.55	0	67.02	-	-	74	-6.98	180	117	H
			5.351825	51.14	RMS	34.5	-36.57	0.1	49.17	54	-4.83	-	-	180	117	H
			5.35	67.87	Pk	34.5	-36.55	0	65.82	-	-	74	-8.18	162	113	V
			5.35	52.68	RMS	34.5	-36.55	0.1	50.73	54	-3.27	-	-	162	113	V
			5.350005	52.61	RMS	34.5	-36.55	0.1	50.66	54	-3.34	-	-	162	113	V
			5.350402	69.02	Pk	34.5	-36.56	0	66.96	-	-	74	-7.04	162	113	V
EHT160 (52T / Index S52)	5250 (Upper)	6 + 5	5.35	61.26	Pk	34.5	-36.55	0	59.21	-	-	74	-14.79	202	126	H
			5.35	46.02	RMS	34.5	-36.55	0.2	44.17	54	-9.83	-	-	202	126	H
			5.350029	62.42	Pk	34.5	-36.55	0	60.37	-	-	74	-13.63	202	126	H
			5.404978	47.19	RMS	34.6	-36.51	0.2	45.48	54	-8.52	-	-	202	126	H
			5.35	59.28	Pk	34.5	-36.55	0	57.23	-	-	74	-16.77	138	378	V
			5.35	46.52	RMS	34.5	-36.55	0.2	44.67	54	-9.33	-	-	138	378	V
			5.350029	61.66	Pk	34.5	-36.55	0	59.61	-	-	74	-14.39	138	378	V
			5.358848	47.51	RMS	34.6	-36.57	0.2	45.74	54	-8.26	-	-	138	378	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

HORIZONTAL RESULT

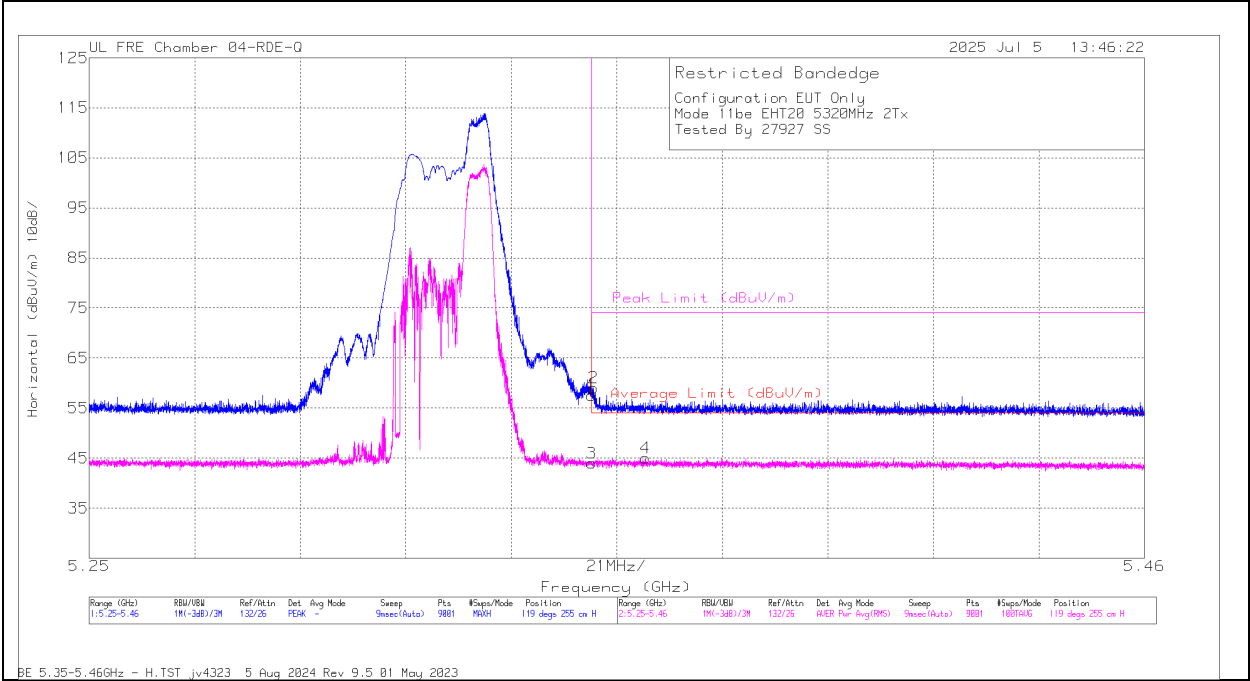


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35	59.56	Pk	34.5	0	-36.55	57.51	-	-	74	-16.49	119	255	H
3	5.35	46.02	RMS	34.5	0	-36.55	43.97	54	-10.03	-	-	119	255	H
2	5.350309	61.13	Pk	34.5	0	-36.56	59.07	-	-	74	-14.93	119	255	H
4	5.360692	46.99	RMS	34.6	0	-36.57	45.02	54	-8.98	-	-	119	255	H

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

VERTICAL RESULT

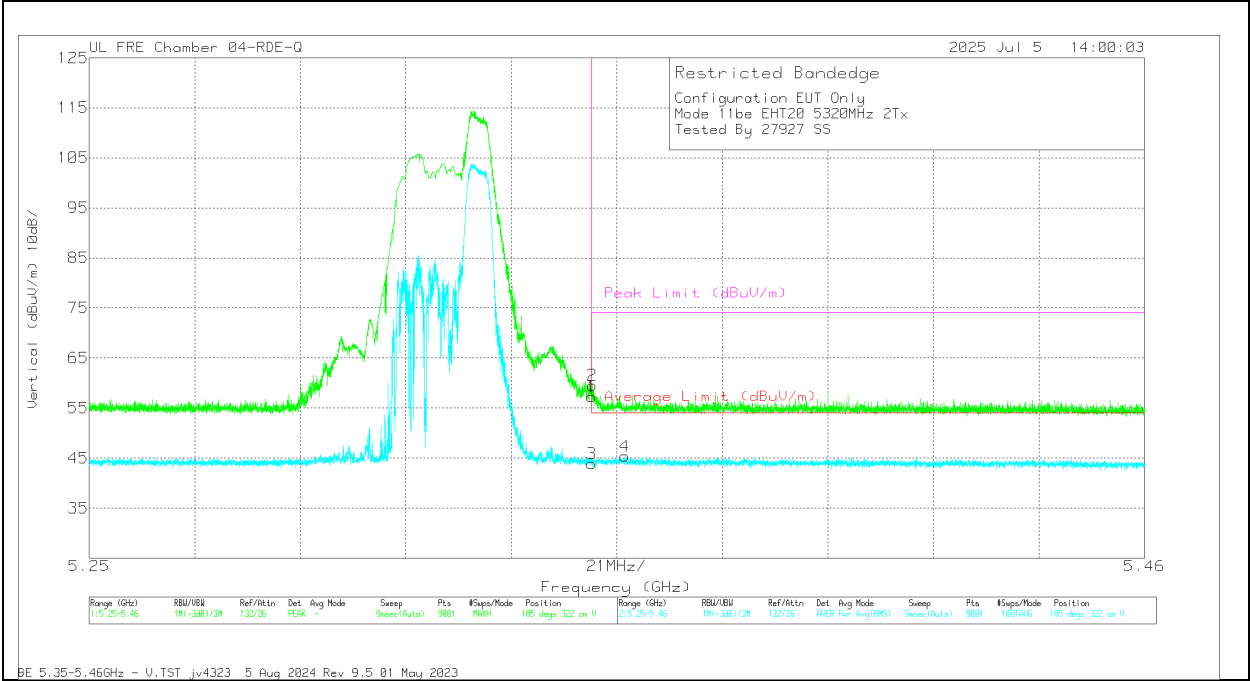

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35	59.32	Pk	34.5	0	-36.55	57.27	-	-	74	-16.73	185	322	V
3	5.35	45.99	RMS	34.5	0	-36.55	43.94	54	-10.06	-	-	185	322	V
2	5.350075	61.58	Pk	34.5	0	-36.55	59.53	-	-	74	-14.47	185	322	V
4	5.356655	47.34	RMS	34.6	0	-36.6	45.34	54	-8.66	-	-	185	322	V

Pk - Peak detector
RMS - RMS detection

1.1.15. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5260	6 + 5	* 11.705744	40.76	ADR	38.4	-40.4	0	38.76	54	-15.24	-	-	1	101	H
			* 11.714176	52.48	PK-U	38.4	-40.6	0	50.28	-	-	74	-23.72	1	199	V
			* 11.714398	40.71	ADR	38.4	-40.6	0	38.51	54	-15.49	-	-	1	199	V
			* 11.722584	52.51	PK-U	38.4	-40.3	0	50.61	-	-	74	-23.39	1	101	H
			* 1.211205	61.25	PK-U	28.8	-48.9	0	41.15	-	-	74	-32.85	1	101	V
			* 1.211819	49.41	ADR	28.8	-48.8	0	29.41	54	-24.59	-	-	1	101	V
			* 1.212305	60.97	PK-U	28.8	-48.8	0	40.97	-	-	74	-33.03	1	200	H
			* 1.213559	49.28	ADR	28.8	-48.8	0	29.28	54	-24.72	-	-	1	200	H
			* 3.815734	44.94	ADR	33.5	-45.8	0	32.64	54	-21.36	-	-	1	200	V
			* 3.822328	44.79	ADR	33.5	-45.6	0	32.69	54	-21.31	-	-	1	200	H
			* 3.824775	56.67	PK-U	33.5	-45.6	0	44.57	-	-	74	-29.43	1	200	H
			* 3.835067	57.03	PK-U	33.5	-45.5	0	45.03	-	-	74	-28.97	1	200	V
			* 11.701077	52.12	PK-U	38.4	-40.3	0	50.22	-	-	74	-23.78	0	101	H
			* 11.712673	40.67	ADR	38.4	-40.4	0	38.67	54	-15.33	-	-	0	101	H
			* 11.718024	40.73	ADR	38.4	-40.2	0	38.93	54	-15.07	-	-	0	101	V
	5300	6 + 5	* 11.721361	52.16	PK-U	38.4	-40.3	0	50.26	-	-	74	-23.74	0	101	V
			* 1.326791	49.19	ADR	28.9	-48.8	0	29.29	54	-24.71	-	-	0	199	H
			* 1.327437	60.99	PK-U	28.9	-48.9	0	40.99	-	-	74	-33.01	0	199	H
			* 1.329152	49.35	ADR	28.8	-48.9	0	29.25	54	-24.75	-	-	0	101	V
			* 1.331172	61.19	PK-U	28.8	-48.8	0	41.19	-	-	74	-32.81	0	101	V
			* 4.100032	57.1	PK-U	33.4	-46.2	0	44.3	-	-	74	-29.7	0	199	H
			* 4.100214	45.35	ADR	33.4	-46.2	0	32.55	54	-21.45	-	-	0	198	V
			* 4.101772	45.35	ADR	33.4	-46.2	0	32.55	54	-21.45	-	-	0	199	H
			* 4.113501	57.04	PK-U	33.4	-46	0	44.44	-	-	74	-29.56	0	198	V
			* 11.558365	40.7	ADR	38.2	-40.4	0	38.5	54	-15.5	-	-	360	200	H
			* 11.561407	40.74	ADR	38.2	-40.4	0	38.54	54	-15.46	-	-	360	101	V
			* 11.577396	52.13	PK-U	38.2	-40.3	0	50.03	-	-	74	-23.97	360	200	H
	5320	6 + 5	* 11.584407	52.59	PK-U	38.3	-40.2	0	50.69	-	-	74	-23.31	360	101	V
			* 1.268681	60.5	PK-U	29.1	-48.8	0	40.8	-	-	74	-33.2	360	101	V
			* 1.269001	49.33	ADR	29.1	-48.8	0	29.63	54	-24.37	-	-	360	101	V
			* 1.272888	60.9	PK-U	29.2	-48.8	0	41.3	-	-	74	-32.7	360	200	H
			* 1.273288	49.17	ADR	29.2	-48.8	0	29.57	54	-24.43	-	-	360	200	H
			* 3.850273	55.73	PK-U	33.5	-45.5	0	43.73	-	-	74	-30.27	360	101	H
			* 3.878093	44.29	ADR	33.5	-45.3	0	32.49	54	-21.51	-	-	360	101	H
			* 3.879714	44.44	ADR	33.5	-45.3	0	32.64	54	-21.36	-	-	360	200	V
			* 3.889241	55.58	PK-U	33.5	-44.9	0	44.18	-	-	74	-29.82	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5270	6 + 5	* 1.235625	62.5	PK-U	29.2	-50.2	0	41.5	-	-	74	-32.5	0	200	H
			* 1.236852	50.93	ADR	29.2	-50.29	0	29.84	54	-24.16	-	-	0	200	H
			* 3.818901	57.89	PK-U	33.2	-47.71	0	43.38	-	-	74	-30.62	0	200	H
			* 3.818087	46.14	ADR	33.2	-47.79	0	31.55	54	-22.45	-	-	0	200	H
			* 1.237531	62.59	PK-U	29.2	-50.3	0	41.49	-	-	74	-32.51	0	101	V
			* 1.239615	51.1	ADR	29.2	-50.26	0	30.04	54	-23.96	-	-	0	101	V
			3.496466	58.32	PK-U	32.7	-47.55	0	43.47	-	-	68.2	-24.73	3	200	V
			17.598454	56.7	PK-U	41.6	-41.45	0	56.85	-	-	68.2	-11.35	3	200	V
			17.604156	56.18	PK-U	41.6	-41.48	0	56.3	-	-	68.2	-11.9	3	200	H
			* 1.239592	62.57	PK-U	29.2	-50.26	0	41.51	-	-	74	-32.49	0	101	H
	5310	6 + 5	* 1.240916	51.07	ADR	29.2	-50.21	0	30.06	54	-23.94	-	-	0	101	H
			* 4.860582	59.68	PK-U	33.9	-48.7	0	44.88	-	-	74	-29.12	0	200	H
			* 4.861753	48.13	ADR	33.9	-48.78	0	33.25	54	-20.75	-	-	0	200	H
			* 1.231924	62.05	PK-U	29.1	-50.21	0	40.94	-	-	74	-33.06	0	101	V
			* 1.23318	50.8	ADR	29.1	-50.22	0	29.68	54	-24.32	-	-	0	101	V
			* 4.612309	59.33	PK-U	33.8	-48.44	0	44.69	-	-	74	-29.31	0	101	V
			* 4.615574	47.12	ADR	33.8	-48.4	0	32.52	54	-21.48	-	-	0	101	V
			17.604191	57	PK-U	41.6	-41.48	0	57.12	-	-	68.2	-11.08	0	200	V
			17.622239	56.53	PK-U	41.6	-41.72	0	56.41	-	-	68.2	-11.79	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5290	6 + 5	* 3.839247	57.75	PK-U	33.3	-47.8	0	43.25	-	-	74	-30.75	98	334	H
			* 3.839725	46.24	ADR	33.3	-47.8	0	31.74	54	-22.26	-	-	98	334	H
			* 3.839119	58.07	PK-U	33.3	-47.8	0	43.57	-	-	74	-30.43	212	111	V
			* 3.838536	46.17	ADR	33.3	-47.8	0	31.67	54	-22.33	-	-	212	111	V
			* 15.871935	57.62	PK-U	40.6	-44.6	0	53.62	-	-	74	-20.38	76	223	H
			* 15.871732	44.93	ADR	40.6	-44.6	0	40.93	54	-13.07	-	-	76	223	H
			* 15.867914	56.14	PK-U	40.6	-44.69	0	52.05	-	-	74	-21.95	35	113	V
			* 15.870357	44.35	ADR	40.6	-44.66	0	40.29	54	-13.71	-	-	35	113	V
			10.576766	58.29	PK-U	37.6	-47.35	0	48.54	-	-	68.2	-19.66	207	121	V
			10.582432	58.28	PK-U	37.6	-47.4	0	48.48	-	-	68.2	-19.72	266	343	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 1.182142	62.02	PK-U	28.1	-49.9	0	40.22	-	-	74	-33.78	0	200	H
			* 1.181966	50.44	ADR	28.1	-49.9	0	28.64	54	-25.36	-	-	0	200	H
			* 3.886973	58.05	PK-U	33.5	-47.5	0	44.05	-	-	74	-29.95	0	200	H
			* 3.888169	46.04	ADR	33.5	-47.48	0	32.06	54	-21.94	-	-	0	200	H
			* 1.286895	62.22	PK-U	28.5	-49.51	0	41.21	-	-	74	-32.79	0	101	V
			* 1.289423	50.08	ADR	28.5	-49.5	0	29.08	54	-24.92	-	-	0	101	V
			* 4.516895	58.23	PK-U	34	-47.8	0	44.43	-	-	74	-29.57	0	101	V
			* 4.519309	46.64	ADR	34	-47.93	0	32.71	54	-21.29	-	-	0	101	V
			16.56706	54.3	PK-U	41.5	-42.2	0	53.6	-	-	68.2	-14.6	0	199	H
			17.046959	52.97	PK-U	41.8	-41.3	0	53.47	-	-	68.2	-14.73	0	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)

LOW CHANNEL RESULTS

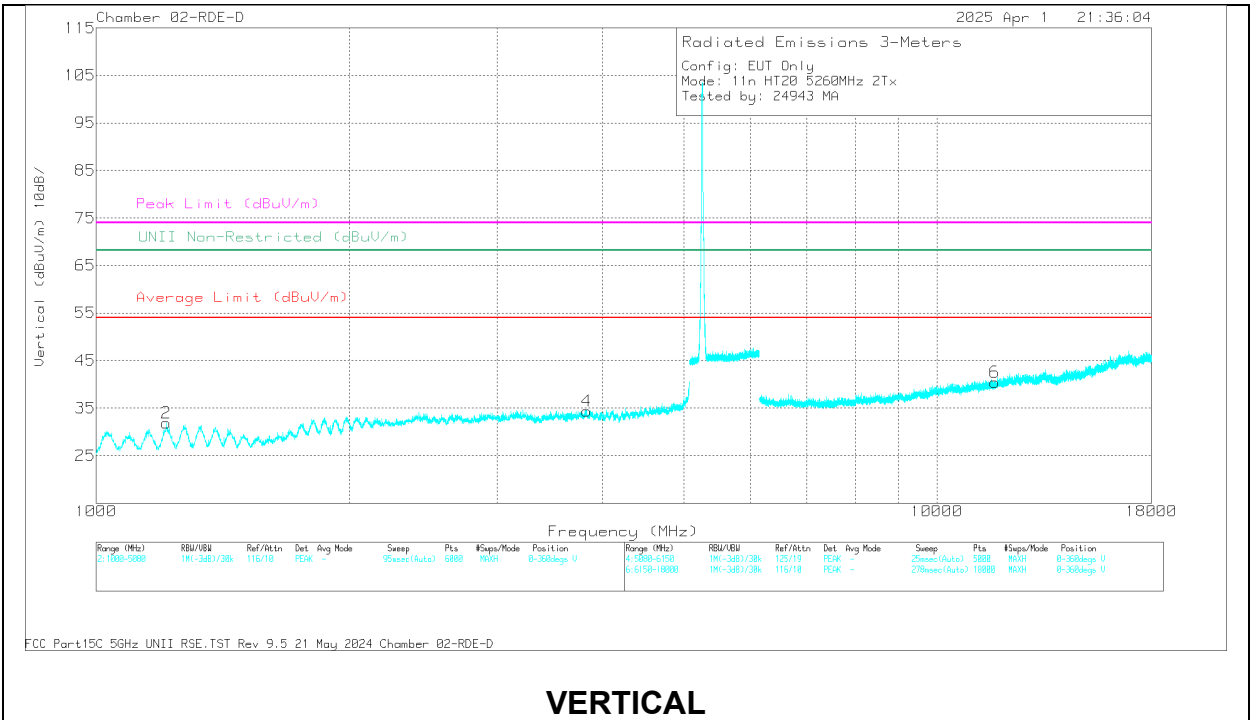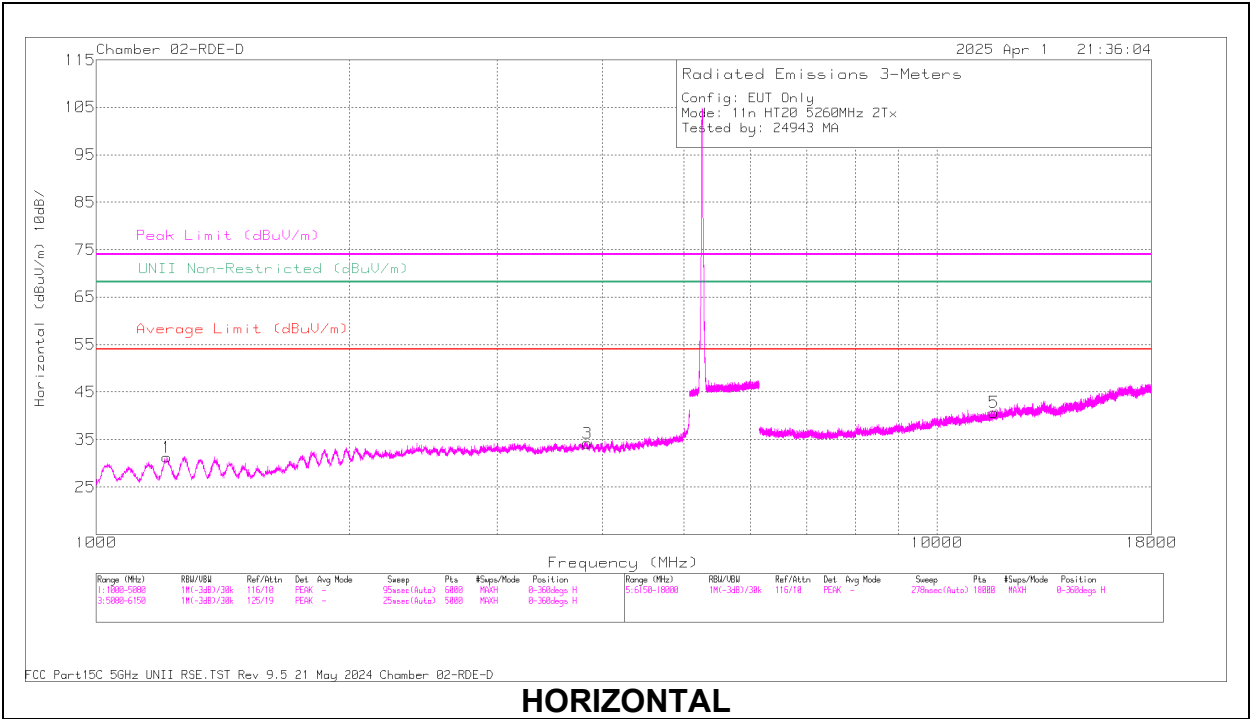

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Ampl/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.705744	40.76	ADR	38.4	-40.4	0	38.76	54	-15.24	-	-	1	101	H
6	* 11.714176	52.48	PK-U	38.4	-40.6	0	50.28	-	-	74	-23.72	1	199	V
6	* 11.714398	40.71	ADR	38.4	-40.6	0	38.51	54	-15.49	-	-	1	199	V
5	* 11.722584	52.51	PK-U	38.4	-40.3	0	50.61	-	-	74	-23.39	1	101	H
2	* 1.211205	61.25	PK-U	28.8	-48.9	0	41.15	-	-	74	-32.85	1	101	V
2	* 1.211819	49.41	ADR	28.8	-48.8	0	29.41	54	-24.59	-	-	1	101	V
1	* 1.212305	60.97	PK-U	28.8	-48.8	0	40.97	-	-	74	-33.03	1	200	H
1	* 1.213559	49.28	ADR	28.8	-48.8	0	29.28	54	-24.72	-	-	1	200	H
4	* 3.815734	44.94	ADR	33.5	-45.8	0	32.64	54	-21.36	-	-	1	200	V
3	* 3.822328	44.79	ADR	33.5	-45.6	0	32.69	54	-21.31	-	-	1	200	H
3	* 3.824775	56.67	PK-U	33.5	-45.6	0	44.57	-	-	74	-29.43	1	200	H
4	* 3.835067	57.03	PK-U	33.5	-45.5	0	45.03	-	-	74	-28.97	1	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.16. 802.11be MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5260	6 + 5	* 1.266301	60.98	PK-U	29.1	-48.9	0	41.18	-	-	74	-32.82	137	164	V
			* 1.272588	49.22	ADR	29.2	-48.9	0	29.52	54	-24.48	-	-	137	164	V
			* 1.274182	49.11	ADR	29.2	-48.7	0	29.61	54	-24.39	-	-	310	133	H
			* 1.274442	61.12	PK-U	29.2	-48.8	0	41.52	-	-	74	-32.48	310	133	H
			* 3.761996	44.81	ADR	33.4	-45.6	0	32.61	54	-21.39	-	-	188	241	V
			* 3.762752	56.5	PK-U	33.4	-45.7	0	44.2	-	-	74	-29.8	84	224	H
			* 3.762883	56.51	PK-U	33.4	-45.7	0	44.21	-	-	74	-29.79	188	241	V
			* 3.764412	44.79	ADR	33.4	-45.7	0	32.49	54	-21.51	-	-	84	224	H
			10.391856	41.96	ADR	37.5	-41.5	0	37.96	-	-	-	-	166	272	H
			10.409333	42.1	ADR	37.5	-41.3	0	38.3	-	-	-	-	228	144	V
			10.415741	53.66	PK-U	37.5	-41.3	0	49.86	-	-	68.2	-18.34	228	144	V
			10.428621	53.8	PK-U	37.5	-41.3	0	50	-	-	68.2	-18.2	166	272	H
	5300	6 + 5	* 12.462421	52.28	PK-U	39	-39.4	0	51.88	-	-	74	-22.12	16	341	V
			* 12.469035	40.64	ADR	39	-39.4	0	40.24	54	-13.76	-	-	16	341	V
			* 12.485687	40.54	ADR	39	-39.7	0	39.84	54	-14.16	-	-	288	210	H
			* 12.487745	52.14	PK-U	39	-39.7	0	51.44	-	-	74	-22.56	288	210	H
			* 1.330421	61.67	PK-U	28.8	-48.9	0	41.57	-	-	74	-32.43	210	191	H
			* 1.330653	49.46	ADR	28.8	-48.8	0	29.46	54	-24.54	-	-	60	127	V
			* 1.331621	49.45	ADR	28.8	-48.8	0	29.45	54	-24.55	-	-	210	191	H
			* 1.333506	60.54	PK-U	28.8	-48.8	0	40.54	-	-	74	-33.46	60	127	V
			3.158429	56.22	PK-U	33.2	-45.6	0	43.82	-	-	68.2	-24.38	324	122	V
			3.167166	56.32	PK-U	33.1	-45.5	0	43.92	-	-	68.2	-24.28	177	168	H
			3.167919	44.83	ADR	33.1	-45.4	0	32.53	-	-	-	-	177	168	H
			3.168763	44.63	ADR	33.1	-45.5	0	32.23	-	-	-	-	324	122	V
	5320	6 + 5	* 1.2086	60.78	PK-U	28.7	-48.9	0	40.58	-	-	74	-33.42	204	315	H
			* 1.214505	49.21	ADR	28.8	-48.8	0	29.21	54	-24.79	-	-	3	127	V
			* 1.21474	49.4	ADR	28.8	-48.8	0	29.4	54	-24.6	-	-	204	315	H
			* 1.216885	60.96	PK-U	28.8	-48.8	0	40.96	-	-	74	-33.04	3	127	V
			* 4.514389	56.89	PK-U	34	-45.9	0	44.99	-	-	74	-29.01	138	177	V
			* 4.514849	44.97	ADR	34	-45.9	0	33.07	54	-20.93	-	-	138	177	V
			* 4.5525	56.27	PK-U	34	-45.8	0	44.47	-	-	74	-29.53	244	178	H
			* 4.554887	44.96	ADR	34	-45.8	0	33.16	54	-20.84	-	-	244	178	H
			* 8.033018	53.3	PK-U	35.9	-42.4	0	46.8	-	-	74	-27.2	189	355	V
			* 8.055825	41.72	ADR	35.9	-42.2	0	35.42	54	-18.58	-	-	243	149	H
			* 8.059222	41.9	ADR	35.9	-42.1	0	35.7	54	-18.3	-	-	189	355	V
			* 8.064096	53.84	PK-U	35.9	-42.2	0	47.54	-	-	74	-26.46	243	149	H
11be (52T / Highest PSD)	5260 (Low Index)	6 + 5	* 3.664576	57.46	PK-U	33.1	-46.29	0	44.27	-	-	74	-29.73	182	349	H
			* 3.664458	46.12	ADR	33.1	-46.28	0	32.94	54	-21.06	-	-	182	349	H
			* 3.668342	57.8	PK-U	33.1	-46.23	0	44.67	-	-	74	-29.33	90	259	V
			* 3.666733	46.02	ADR	33.1	-46.28	0	32.84	54	-21.16	-	-	90	259	V
			1.89306	49.98	ADR	30.8	-49.18	0	31.6	-	-	-	-	205	126	H
			1.8938	50.04	ADR	30.8	-49.16	0	31.68	-	-	-	-	353	252	V
			1.893957	62.24	PK-U	30.8	-49.16	0	43.88	-	-	68.2	-24.32	205	126	H
			1.896609	61.48	PK-U	30.8	-49.27	0	43.01	-	-	68.2	-25.19	353	252	V
			13.66366	46.55	ADR	38.9	-43.61	0	41.84	-	-	-	-	339	287	H
			13.666568	58.17	PK-U	38.9	-43.66	0	53.41	-	-	68.2	-14.79	339	287	H
			13.67451	58.34	PK-U	38.9	-43.57	0	53.67	-	-	68.2	-14.53	99	104	V
			13.676568	46.28	ADR	38.9	-43.62	0	41.56	-	-	-	-	99	104	V
	5300 (Mid Index)	6 + 5	* 3.843908	57.51	PK-U	33.4	-46.03	0	44.88	-	-	74	-29.12	99	211	H
			* 3.843055	45.63	ADR	33.4	-46.1	0	32.93	54	-21.07	-	-	99	211	H
			* 3.84607	57.47	PK-U	33.4	-45.98	0	44.89	-	-	74	-29.11	247	174	V
			* 3.846747	45.7	ADR	33.4	-45.99	0	33.11	54	-20.89	-	-	247	174	V
			1.834939	49.87	ADR	30.4	-49.06	0	31.21	-	-	-	-	83	134	H
			1.836322	61.32	PK-U	30.4	-49.09	0	42.63	-	-	68.2	-25.57	83	134	H
			1.83779	49.74	ADR	30.4	-49.16	0	30.98	-	-	-	-	20	306	V
			1.838407	61.16	PK-U	30.4	-49.17	0	42.39	-	-	68.2	-25.81	20	306	V
			9.709926	47.61	ADR	36.8	-46	0	38.41	-	-	-	-	75	377	V
			9.710475	58.67	PK-U	36.8	-45.98	0	49.49	-	-	68.2	-18.71	75	377	V
			9.731915	59.4	PK-U	36.8	-45.85	0	50.35	-	-	68.2	-17.85	148	328	H
			9.732197	47.61	ADR	36.8	-45.85	0	38.56	-	-	-	-	148	328	H
	5320 (High Index)	6 + 5	* 3.908656	56.99	PK-U	33.4	-45.82	0	44.57	-	-	74	-29.43	175	298	H
			* 3.907044	45.59	ADR	33.4	-45.83	0	33.16	54	-20.84	-	-	175	298	H
			* 3.902332	57.01	PK-U	33.4	-45.9	0	44.51	-	-	74	-29.49	352	168	V
			* 3.905391	45.6	ADR	33.4	-45.83	0	33.17	54	-20.83	-	-	352	168	V
			2.092017	49.84	ADR	31.7	-49.39	0	32.15	-	-	-	-	300	208	V
			2.093592	61.25	PK-U	31.7	-49.4	0	43.55	-	-	68.2	-24.65	300	208	V
			2.098627	49.84	ADR	31.7	-49.35	0	32.19	-	-	-	-	231	183	H
			2.101162	61.4	PK-U	31.7	-49.45	0	43.65	-	-	68.2	-24.55	231	183	H
			13.594755	57.56	PK-U	38.9	-43.77	0	52.69	-	-	68.2	-15.51	272	125	V
			13.597681	46.35	ADR	38.9	-43.71	0	41.54	-	-	-	-	272	125	V
			13.614361	46.23	ADR	38.9	-43.75	0	41.38	-	-	-	-	50	127	H
			13.615078	57.79	PK-U	38.9	-43.7	0	52.99	-	-	68.2	-15.21	50	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ FIR/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5270	6 + 5	* 1.180663	62.27	PK-U	28.1	-49.83	0	40.54	-	-	74	-33.46	0	101	H
			* 1.182899	50.78	ADR	28.1	-49.9	0	28.98	54	-25.02	-	-	0	101	H
			* 3.939329	57.75	PK-U	33.5	-47.43	0	43.82	-	-	74	-30.18	0	101	H
			* 3.939564	46.1	ADR	33.5	-47.46	0	32.14	54	-21.86	-	-	0	101	H
			* 1.28856	61.83	PK-U	28.5	-49.5	0	40.83	-	-	74	-33.17	0	101	V
			* 1.289159	50.42	ADR	28.5	-49.5	0	29.42	54	-24.58	-	-	0	101	V
			* 4.57312	58.56	PK-U	34.1	-47.79	0	44.87	-	-	74	-29.13	0	200	V
			* 4.573357	46.48	ADR	34.1	-47.76	0	32.82	54	-21.18	-	-	0	200	V
			16.532115	55.03	PK-U	41.4	-42.01	0	54.42	-	-	68.2	-13.78	0	200	V
			16.541559	54.21	PK-U	41.4	-42	0	53.61	-	-	68.2	-14.59	0	200	H
	5310	6 + 5	* 1.240781	62.41	PK-U	28.5	-49.82	0	41.09	-	-	74	-32.91	0	101	H
			* 1.238045	50.39	ADR	28.5	-49.8	0	29.09	54	-24.91	-	-	0	101	H
			* 4.3494	57.72	PK-U	33.7	-47.6	0	43.82	-	-	74	-30.18	0	198	H
			* 4.350955	46.08	ADR	33.7	-47.7	0	32.08	54	-21.92	-	-	0	198	H
			* 1.183069	62.37	PK-U	28.1	-49.9	0	40.57	-	-	74	-33.43	0	199	V
			* 1.181954	50.62	ADR	28.1	-49.9	0	28.82	54	-25.18	-	-	0	199	V
			* 4.151576	57.38	PK-U	33.4	-47.2	0	43.58	-	-	74	-30.42	0	101	V
			* 4.150419	45.77	ADR	33.4	-47.2	0	31.97	54	-22.03	-	-	0	101	V
			16.52842	55.27	PK-U	41.4	-42.04	0	54.63	-	-	68.2	-13.57	0	200	H
			16.595024	54.38	PK-U	41.6	-41.9	0	54.08	-	-	68.2	-14.12	0	200	V
11be (242T / Highest PSD)	5270 High Index)	6 + 5	1.943586	61.95	PK-U	31.1	-49.27	0	43.78	-	-	68.2	-24.42	147	320	V
			1.944275	62.05	PK-U	31.1	-49.23	0	43.92	-	-	68.2	-24.28	38	158	H
			1.944716	50.37	ADR	31.1	-49.2	0	32.27	-	-	-	-	38	158	H
			1.944885	50.37	ADR	31.1	-49.19	0	32.28	-	-	-	-	147	320	V
			3.191329	47.2	ADR	32.8	-46.94	0	33.06	-	-	-	-	37	245	V
			3.191805	47.24	ADR	32.8	-46.9	0	33.14	-	-	-	-	15	168	H
			3.193031	58.81	PK-U	32.8	-46.84	0	44.77	-	-	68.2	-23.43	15	168	H
			3.194035	58.7	PK-U	32.8	-46.71	0	44.79	-	-	68.2	-23.41	37	245	V
			8.982661	56.46	PK-U	36.2	-42.82	0	49.84	-	-	68.2	-18.36	295	194	H
			8.982687	44.82	ADR	36.2	-42.82	0	38.2	-	-	-	-	295	194	H
	5310 (High Index)	6 + 5	8.984323	55.78	PK-U	36.2	-42.93	0	49.05	-	-	68.2	-19.15	339	276	V
			8.984375	44.98	ADR	36.2	-42.93	0	38.25	-	-	-	-	339	276	V
			1.841284	62.15	PK-U	30.4	-49.11	0	43.44	-	-	68.2	-24.76	187	345	V
			1.841921	50.21	ADR	30.4	-49.1	0	31.51	-	-	-	-	187	345	V
			1.842057	61.75	PK-U	30.4	-49.1	0	43.05	-	-	68.2	-25.15	327	281	H
			1.842352	50.14	ADR	30.4	-49.11	0	31.43	-	-	-	-	327	281	H
			3.0712	46.98	ADR	33	-47.02	0	32.96	-	-	-	-	19	230	V
			3.072027	58.38	PK-U	33	-47.01	0	44.37	-	-	68.2	-23.83	19	230	V
			3.072687	58.88	PK-U	33	-46.99	0	44.89	-	-	68.2	-23.31	293	144	H
			3.073033	47.12	ADR	33	-46.98	0	33.14	-	-	-	-	293	144	H
11be (106+26)T / Highest PSD)	5270	6 + 5	8.975794	44.9	ADR	36.2	-42.96	0	38.14	-	-	-	-	147	396	V
			8.977625	56.62	PK-U	36.2	-42.9	0	49.92	-	-	68.2	-18.28	147	396	V
			8.987321	56.94	PK-U	36.2	-42.88	0	50.26	-	-	68.2	-17.94	333	245	H
			8.988904	45.09	ADR	36.2	-42.88	0	38.41	-	-	-	-	333	245	H
			1.59883	61.87	PK-U	28.5	-48.91	0	41.46	-	-	74	-32.54	360	101	V
			1.623947	49.61	ADR	28.7	-48.82	0	29.49	54	-24.51	-	-	360	101	H
			1.624314	61.5	PK-U	28.7	-48.81	0	41.39	-	-	74	-32.61	360	101	H
			1.627844	49.56	ADR	28.7	-48.88	0	29.38	-	-	-	-	360	101	V
			10.626903	48.01	ADR	37.7	-45.47	0	40.24	54	-13.76	-	-	360	101	V
			10.627574	47.92	ADR	37.7	-45.52	0	40.1	54	-13.9	-	-	360	101	H
	5310 (Mid Index)	6 + 5	10.630983	60.05	PK-U	37.7	-45.68	0	52.07	-	-	74	-21.93	360	101	H
			10.660561	59.57	PK-U	37.7	-45.45	0	51.82	-	-	74	-22.18	360	101	V
			12.698451	46.5	ADR	39.1	-43.48	0	42.12	54	-11.88	-	-	360	101	H
			12.701194	58.8	PK-U	39.1	-43.54	0	54.36	-	-	68.2	-13.84	360	101	H
			12.704909	58.56	PK-U	39.1	-43.27	0	54.39	-	-	68.2	-13.81	360	101	V
			12.717255	46.45	ADR	39.1	-43.6	0	41.95	-	-	-	-	360	101	V
			2.659789	59.98	PK-U	32.7	-49.54	0	43.14	-	-	74	-30.86	29	177	H
			2.664363	48.34	ADR	32.7	-49.53	0	31.51	54	-22.49	-	-	29	177	H
			2.662586	59.74	PK-U	32.7	-49.52	0	42.92	-	-	74	-31.08	185	163	V
			2.658439	49.01	ADR	32.7	-49.53	0	32.18	54	-21.82	-	-	185	163	V
			11.937743	54.71	PK-U	39	-43.42	0	50.29	-	-	74	-23.71	337	171	H
			11.955312	42.83	ADR	39	-43.78	0	38.05	54	-15.95	-	-	337	171	H
			16.649928	54.67	PK-U	40.9	-42.41	0	53.16	-	-	68.2	-15.04	196	288	H
			16.653381	43.25	ADR	40.9	-42.4	0	41.75	-	-	-	-	196	288	H
			11.945153	54.88	PK-U	39	-43.6	0	50.28	-	-	74	-23.72	17	322	V
			11.952744	43.12	ADR	39	-43.7	0	38.42	54	-15.58	-	-	17	322	V
			16.646354	54.73	PK-U	40.9	-42.46	0	53.17	-	-	68.2	-15.03	143	241	V
			16.656181	43.25	ADR	40.9	-42.37	0	41.78	-	-	-	-	143	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5290	6 + 5	* 15.870764	55.09	PK-U	40.8	0	-42.7	53.19	-	-	74	-20.81	113	150	H
			* 15.869778	43.31	ADR	40.8	0	-42.7	41.41	54	-12.59	-	-	113	150	H
			* 15.870576	55.09	PK-U	40.8	0	-42.7	53.19	-	-	74	-20.81	154	244	V
			* 15.870621	43.39	ADR	40.8	0	-42.7	41.49	54	-12.51	-	-	154	244	V
			1.951814	62.06	PK-U	31.1	0	-49.4	43.76	-	-	68.2	-24.44	328	107	H
			1.953396	61.64	PK-U	31.1	0	-49.3	43.44	-	-	68.2	-24.76	336	377	V
			10.580111	56.54	PK-U	37.7	0	-45.38	48.86	-	-	68.2	-19.34	330	313	V
			10.580296	56.34	PK-U	37.7	0	-45.34	48.7	-	-	68.2	-19.5	264	113	H
			* 2.274942	61.28	PK-U	31.8	0	-50.31	42.77	-	-	74	-31.23	0	101	H
			* 2.274235	49.24	ADR	31.8	0	-50.31	30.73	54	-23.27	-	-	0	101	H
11be (484T/ Highest PSD)	5290 (Low Index)	6 + 5	* 2.25571	61.4	PK-U	31.7	0	-50.27	42.83	-	-	74	-31.17	0	101	V
			* 2.27251	49.41	ADR	31.8	0	-50.3	30.91	54	-23.09	-	-	0	101	V
			* 7.549301	56.79	PK-U	35.6	0	-46.32	46.07	-	-	74	-27.93	0	101	H
			* 7.554323	44.89	ADR	35.6	0	-46.37	34.12	54	-19.88	-	-	0	101	H
			* 15.837676	53.53	PK-U	41.1	0	-42.11	52.52	-	-	74	-21.48	0	101	H
			* 15.824511	41.79	ADR	41.1	0	-42	40.89	54	-13.11	-	-	0	101	H
			* 8.259153	56.05	PK-U	36	0	-45.77	46.28	-	-	74	-27.72	0	101	V
			* 8.264589	44.29	ADR	36	0	-45.74	34.55	54	-19.45	-	-	0	101	V
			* 15.925382	53.97	PK-U	41.1	0	-41.64	53.43	-	-	74	-20.57	0	101	V
			* 15.928786	42.08	ADR	41.1	0	-41.64	41.54	54	-12.46	-	-	0	101	V
11be (52T/ Highest PSD)	5290 (High Index)	6 + 5	* 2.330186	61.22	PK-U	31.7	0	-49.13	43.79	-	-	74	-30.21	360	101	H
			* 2.330366	49.53	ADR	31.7	0.17	-49.14	32.26	54	-21.74	-	-	360	101	H
			* 2.32995	61.41	PK-U	31.7	0	-49.11	44	-	-	74	-30	360	199	V
			* 2.323416	49.51	ADR	31.7	0.17	-49.12	32.26	54	-21.74	-	-	360	199	V
			* 7.603503	57.88	PK-U	35.8	0	-45.97	47.71	-	-	74	-26.29	360	199	H
			* 7.597881	46.14	ADR	35.8	0.17	-46	36.11	54	-17.89	-	-	360	199	H
			* 7.602952	57.95	PK-U	35.7	0	-46.01	47.64	-	-	74	-26.36	360	101	V
			* 7.605996	46.16	ADR	35.8	0.17	-45.98	36.15	54	-17.85	-	-	360	101	V
			13.719863	58.71	PK-U	38.8	0	-43.53	53.98	-	-	68.2	-14.22	360	101	H
			13.74502	46.85	ADR	38.8	0.17	-43.53	42.29	-	-	-	-	360	200	V
11be (52T/ Highest PSD)	5290 (High Index)	6 + 5	13.751054	46.85	ADR	38.8	0.17	-43.54	42.28	-	-	-	-	360	101	H
			13.757802	58.21	PK-U	38.8	0	-43.55	53.46	-	-	68.2	-14.74	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250	6 + 5	* 1.239853	62.03	PK-U	28.5	-49.89	0	40.64	-	-	74	-33.36	0	101	H
			* 1.240651	50.33	ADR	28.5	-49.83	0	29	54	-25	-	-	0	101	H
			* 4.504996	57.9	PK-U	34	-47.7	0	44.2	-	-	74	-29.8	0	101	H
			* 4.50527	46.28	ADR	34	-47.73	0	32.55	54	-21.45	-	-	0	101	H
			* 1.18604	62.19	PK-U	28.1	-49.9	0	40.39	-	-	74	-33.61	0	101	V
			* 1.186505	50.42	ADR	28.1	-49.95	0	28.57	54	-25.43	-	-	0	101	V
			* 4.811528	58.71	PK-U	34	-47.9	0	44.81	-	-	74	-29.19	0	101	V
			* 4.809309	46.71	ADR	34	-47.9	0	32.81	54	-21.19	-	-	0	101	V
			16.53086	54.75	PK-U	41.4	-42.1	0	54.05	-	-	68.2	-14.15	0	101	V
			17.086443	54.19	PK-U	41.8	-41.34	0	54.65	-	-	68.2	-13.55	0	200	H
11be (242T/ highest PSD)	5250 (Mid Index)	6 + 5	8.006437	57.27	PK-U	35.8	-44.96	0	48.11	-	-	68.2	-20.09	76	209	H
			8.007324	46.01	ADR	35.8	-44.92	0.1	36.99	-	-	-	-	76	209	H
			8.008838	45.94	ADR	35.8	-44.94	0.1	36.9	-	-	-	-	338	195	V
			8.008983	57.68	PK-U	35.8	-44.94	0	48.54	-	-	68.2	-19.66	338	195	V
			10.024557	59.06	PK-U	37.3	-46.51	0	49.85	-	-	68.2	-18.35	24	319	H
			10.024795	59.32	PK-U	37.3	-46.49	0	50.13	-	-	68.2	-18.07	234	172	V
			10.024911	47.78	ADR	37.3	-46.48	0.1	38.7	-	-	-	-	24	319	H
			10.025733	47.65	ADR	37.3	-46.51	0.1	38.54	-	-	-	-	234	172	V
			15.07845	46.2	ADR	39.7	-43.15	0.1	42.85	-	-	-	-	288	384	V
			15.081027	57.66	PK-U	39.7	-43.15	0	54.21	-	-	68.2	-13.99	288	384	V
11be (52T/ highest PSD)	5250 (High Index)	6 + 5	15.082472	46.25	ADR	39.7	-43.23	0.1	42.82	-	-	-	-	358	249	H
			15.086025	57.52	PK-U	39.7	-43.27	0	53.95	-	-	68.2	-14.25	358	249	H
			1.943568	61.91	PK-U	31.1	-49.27	0	43.74	-	-	68.2	-24.46	321	197	H
			1.944652	49.99	ADR	31.1	-49.2	0.2	32.09	-	-	-	-	321	197	H
			1.945259	50.03	ADR	31.1	-49.16	0.2	32.17	-	-	-	-	2	269	V
			1.947767	61.41	PK-U	31.1	-49.11	0	43.4	-	-	68.2	-24.8	2	269	V
			3.300579	57.92	PK-U	32.7	-46.77	0	43.85	-	-	68.2	-24.35	302	355	V
			3.301877	46.03	ADR	32.7	-46.74	0.2	32.19	-	-	-	-	302	355	V
			3.306719	45.97	ADR	32.7	-46.74	0.2	32.13	-	-	-	-	335	378	H
			3.308279	57.62	PK-U	32.7	-46.76	0	43.56	-	-	68.2	-24.64	335	378	H
11be (52T/ highest PSD)	5250 (High Index)	6 + 5	14.289103	58.25	PK-U	39.2	-44.08	0	53.37	-	-	68.2	-14.83	114	270	V
			14.28937	46.51	ADR	39.2	-44.09	0.2	41.82	-	-	-	-	114	270	V
			14.297732	58.18	PK-U	39.2	-43.97	0	53.41	-	-	68.2	-14.79	178	240	H
			14.29774	46.48	ADR	39.2	-43.97	0.2	41.91	-	-	-	-	178	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)

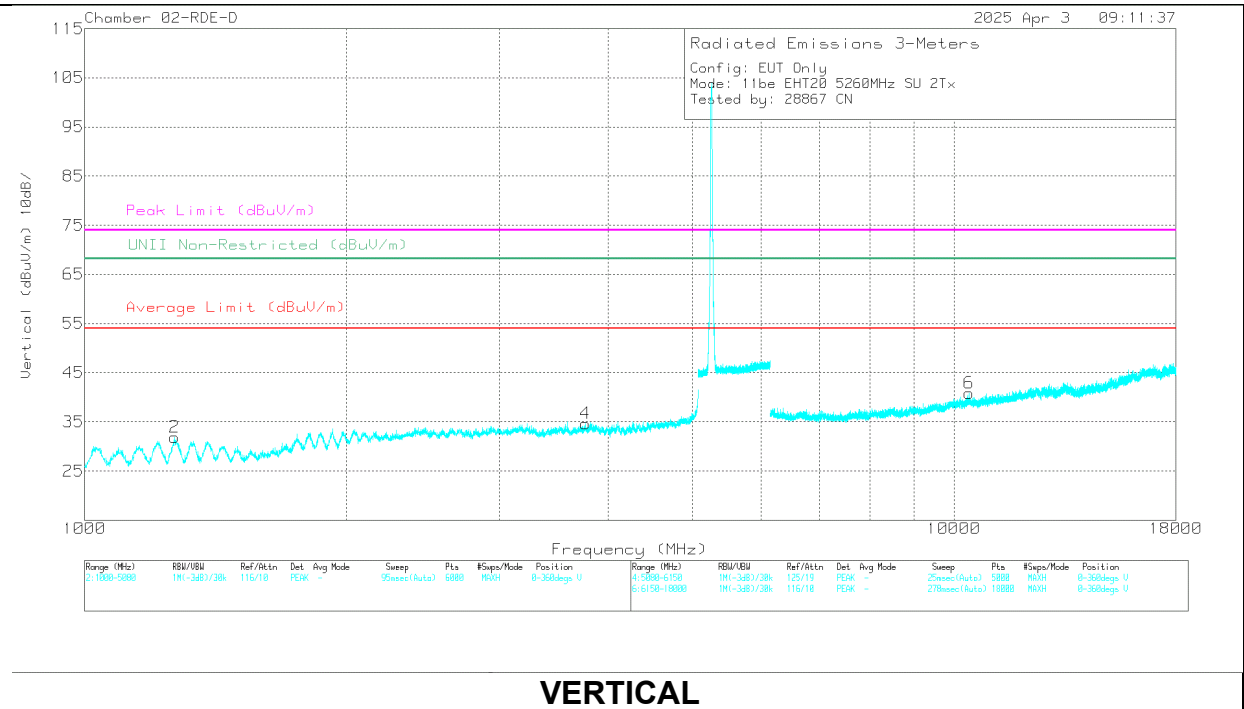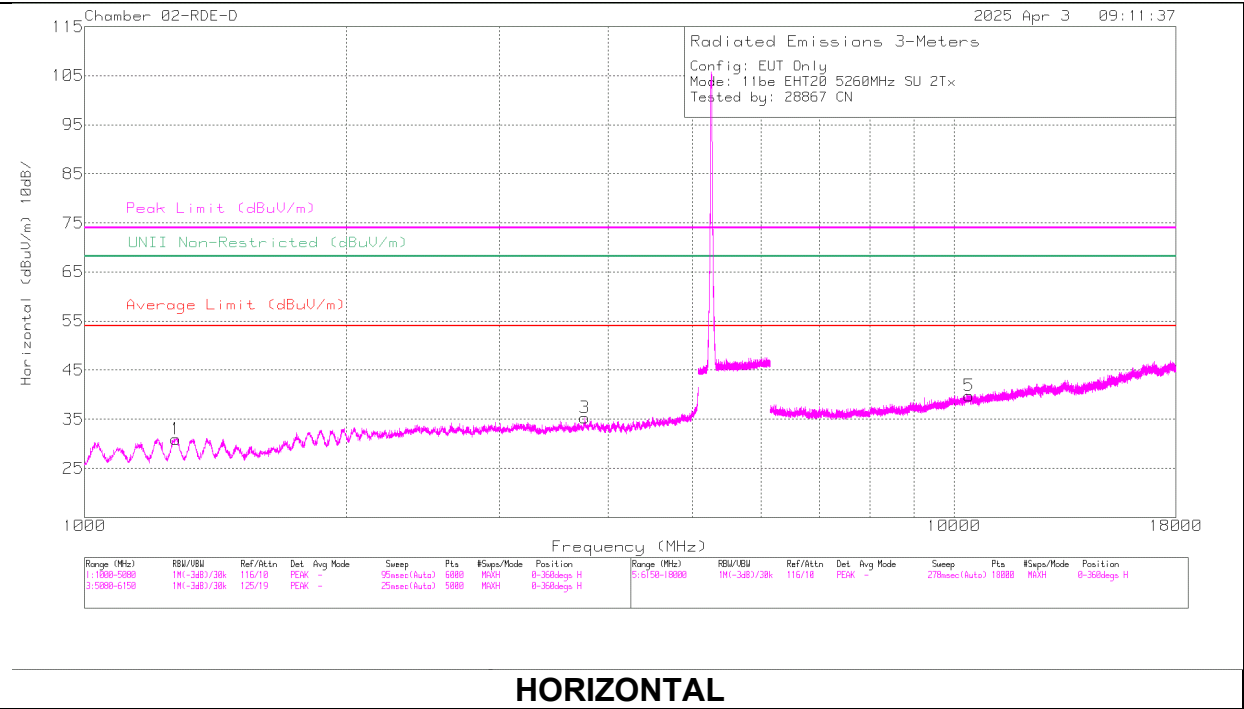

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.266301	60.98	PK-U	29.1	-48.9	0	41.18	-	-	74	-32.82	137	164	V
2	* 1.272588	49.22	ADR	29.2	-48.9	0	29.52	54	-24.48	-	-	137	164	V
1	* 1.274182	49.11	ADR	29.2	-48.7	0	29.61	54	-24.39	-	-	310	133	H
1	* 1.274442	61.12	PK-U	29.2	-48.8	0	41.52	-	-	74	-32.48	310	133	H
4	* 3.761996	44.81	ADR	33.4	-45.6	0	32.61	54	-21.39	-	-	188	241	V
3	* 3.762752	56.5	PK-U	33.4	-45.7	0	44.2	-	-	74	-29.8	84	224	H
4	* 3.762883	56.51	PK-U	33.4	-45.7	0	44.21	-	-	74	-29.79	188	241	V
3	* 3.764412	44.79	ADR	33.4	-45.7	0	32.49	54	-21.51	-	-	84	224	H
5	10.391856	41.96	ADR	37.5	-41.5	0	37.96	-	-	-	-	166	272	H
6	10.409333	42.1	ADR	37.5	-41.3	0	38.3	-	-	-	-	228	144	V
6	10.415741	53.66	PK-U	37.5	-41.3	0	49.86	-	-	68.2	-18.34	228	144	V
5	10.428621	53.8	PK-U	37.5	-41.3	0	50	-	-	68.2	-18.2	166	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.17. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6	* 5.46	58.35	Pk	35.2	-38.01	0	55.54	-	-	68.2	-12.66	35	118	H
			* 5.426666	59.96	Pk	35.1	-38.02	0	57.04	-	-	74	-16.96	35	118	H
			* 5.46	46.75	RMS	35.2	-38.01	0	43.94	54	-10.06	-	-	35	118	H
			* 5.443577	47.63	RMS	35.1	-38.01	0	44.72	54	-9.28	-	-	35	118	H
			* 5.443577	47.63	RMS	35.1	-38.01	0	44.72	54	-9.28	-	-	35	118	H
			5.469354	66.31	Pk	35.2	-38.02	0	63.49	-	-	68.2	-4.71	35	118	H
			5.47	63.41	Pk	35.2	-38.01	0	60.6	-	-	68.2	-7.6	35	118	H
			5.47	48.56	RMS	35.2	-38.01	0	45.75	-	-	-	-	35	118	H
			* 5.46	57.37	Pk	35.2	-38.01	0	54.56	-	-	68.2	-13.64	34	121	V
			* 5.454621	59.5	Pk	35.1	-38.04	0	56.56	-	-	74	-17.44	34	121	V
			* 5.46	47.03	RMS	35.2	-38.01	0	44.22	54	-9.78	-	-	34	121	V
			* 5.438244	47.67	RMS	35.1	-38.06	0	44.71	54	-9.29	-	-	34	121	V
			* 5.438244	47.67	RMS	35.1	-38.06	0	44.71	54	-9.29	-	-	34	121	V
			5.46791	66.31	Pk	35.2	-38.02	0	63.49	-	-	68.2	-4.71	34	121	V
			5.47	64.86	Pk	35.2	-38.01	0	62.05	-	-	68.2	-6.15	34	121	V
			5.47	48.34	RMS	35.2	-38.01	0	45.53	-	-	-	-	34	121	V
	5700	5.725	64.44	Pk	35	-37.21	0	62.23	-	-	68.2	-5.97	80	118	H	
		5.725128	64.8	Pk	35	-37.21	0	62.59	-	-	68.2	-5.61	80	118	H	
		5.725	63.28	Pk	35	-37.21	0	61.07	-	-	68.2	-7.13	351	113	V	
		5.725128	65.3	Pk	35	-37.21	0	63.09	-	-	68.2	-5.11	351	113	V	
		* 5.46	58.49	Pk	35.2	-38.01	0	55.68	-	-	68.2	-12.52	147	151	H	
		* 5.45991	61.12	Pk	35.2	-38.01	0	58.31	-	-	74	-15.69	147	151	H	
	5500	5	* 5.46	46.8	RMS	35.2	-38.01	0	43.99	54	-10.01	-	-	147	151	H
			* 5.455088	47.71	RMS	35.1	-38.05	0	44.76	54	-9.24	-	-	147	151	H
			* 5.455088	47.71	RMS	35.1	-38.05	0	44.76	54	-9.24	-	-	147	151	H
			5.469799	65.83	Pk	35.2	-38.01	0	63.02	-	-	68.2	-5.18	147	151	H
			5.47	64.61	Pk	35.2	-38.01	0	61.8	-	-	68.2	-6.4	147	151	H
			5.47	49.14	RMS	35.2	-38.01	0	46.33	-	-	-	-	147	151	H
			* 5.46	57.36	Pk	35.2	-38.01	0	54.55	-	-	68.2	-13.65	117	121	V
			* 5.458888	59.26	Pk	35.2	-38.01	0	56.45	-	-	74	-17.55	117	121	V
			* 5.46	46.24	RMS	35.2	-38.01	0	43.43	54	-10.57	-	-	117	121	V
			* 5.458732	47.41	RMS	35.2	-38.02	0	44.59	54	-9.41	-	-	117	121	V
* 5.458732			47.41	RMS	35.2	-38.02	0	44.59	54	-9.41	-	-	117	121	V	
5.46931			65.21	Pk	35.2	-38.02	0	62.39	-	-	68.2	-5.81	117	121	V	
5.47			63.65	Pk	35.2	-38.01	0	60.84	-	-	68.2	-7.36	117	121	V	
5.47			48.35	RMS	35.2	-38.01	0	45.54	-	-	-	-	117	121	V	
5700			5.725	62.53	Pk	35	-37.21	0	60.32	-	-	68.2	-7.88	142	169	H
			5.725024	63.28	Pk	35	-37.21	0	61.07	-	-	68.2	-7.13	142	169	H
	5.725	64.9	Pk	35	-37.21	0	62.69	-	-	68.2	-5.51	32	123	V		
	5.725644	65.09	Pk	35	-37.22	0	62.87	-	-	68.2	-5.33	32	123	V		
HT40	5510	6	* 5.3460	45.07	Pk	34.5	-23.95	0	55.62	-	-	68.2	-12.58	229	205	H
			* 5.456399	51.08	Pk	34.5	-23.95	0	61.63	-	-	74	-12.37	229	205	H
			* 5.460	33.53	RMS	34.5	-23.95	0	44.08	54	-9.92	-	-	229	205	H
			* 5.459466	34.15	RMS	34.5	-23.93	0	44.72	54	-9.28	-	-	229	205	H
			* 5.459466	34.15	RMS	34.5	-23.93	0	44.72	54	-9.28	-	-	229	205	H
			5.468954	52.26	Pk	34.5	-23.86	0	62.9	-	-	68.2	-5.3	229	205	H
			5.47	51.57	Pk	34.5	-23.84	0	62.23	-	-	68.2	-5.97	229	205	H
			5.47	34.47	RMS	34.5	-23.84	0	45.13	-	-	-	-	229	205	H
			* 5.460	47.12	Pk	34.5	-23.95	0	57.67	-	-	68.2	-10.53	194	111	V
			* 5.45911	50.64	Pk	34.5	-23.92	0	61.22	-	-	74	-12.78	194	111	V
			* 5.460	32.34	RMS	34.5	-23.95	0	42.89	54	-11.11	-	-	194	111	V
			* 5.458821	33.7	RMS	34.5	-23.93	0	44.27	54	-9.73	-	-	194	111	V
			* 5.458821	33.7	RMS	34.5	-23.93	0	44.27	54	-9.73	-	-	194	111	V
			5.46991	52.66	Pk	34.5	-23.84	0	63.32	-	-	68.2	-4.88	194	111	V
			5.47	50.64	Pk	34.5	-23.84	0	61.3	-	-	68.2	-6.9	194	111	V
			5.47	34.35	RMS	34.5	-23.84	0	45.01	-	-	-	-	194	111	V
	5670	5.725	61.97	Pk	34.5	-37.07	0	59.4	-	-	68.2	-8.8	3	192	H	
		5.72685	65.4	Pk	34.5	-37.03	0	62.87	-	-	68.2	-5.33	3	192	H	
		5.725	61.65	Pk	34.5	-37.07	0	59.08	-	-	68.2	-9.12	335	154	V	
		5.726282	66.12	Pk	34.5	-37.05	0	63.57	-	-	68.2	-4.63	335	154	V	
		* 5.460	59.24	Pk	34.6	-35.79	0	58.05	-	-	68.2	-10.15	137	214	H	
		* 5.458.888	60.83	Pk	34.6	-35.96	0	59.47	-	-	74	-14.53	137	214	H	
	5510	5	* 5.460	45.63	RMS	34.6	-35.79	0	44.44	54	-9.56	-	-	137	214	H
			* 5.458532	46.78	RMS	34.6	-35.97	0	45.41	54	-8.59	-	-	137	214	H
			* 5.458532	46.78	RMS	34.6	-35.97	0	45.41	54	-8.59	-	-	137	214	H
			5.468954	64.32	Pk	34.6	-35.84	0	63.08	-	-	68.2	-5.12	137	214	H
			5.47	60.74	Pk	34.6	-35.86	0	59.48	-	-	68.2	-8.72	137	214	H
			5.47	46.12	RMS	34.6	-35.86	0	44.86	-	-	-	-	137	214	H
			* 5.460	47.15	Pk	34.6	-23.31	0	58.44	-	-	68.2	-9.76	94	101	V
			* 5.459954	47.65	Pk	34.6	-23.32	0	58.93	-	-	74	-15.07	94	101	V
			* 5.460	30.39	RMS	34.6	-23.31	0	41.68	54	-12.32	-	-	94	101	V
			* 5.458332	31.98	RMS	34.6	-23.4	0	43.18	54	-10.82	-	-	94	101	V
			* 5.458332	31.98	RMS	34.6	-23.4	0	43.18	54	-10.82	-	-	94	101	V
			5.469799	52.35	Pk	34.6	-23.26	0	63.69	-	-	68.2	-4.51	94	101	V
			5.47	48.84	Pk	34.6	-23.27	0	60.17	-	-	68.2	-8.03	94	101	V
			5.47	32.12	RMS	34.6	-23.27	0	43.45	-	-	-	-	94	101	V
	5670	5.725	59.34	Pk	34.5	-37.07	0	56.77	-	-	68.2	-11.43	38	208	H	
		5.727883	62.06	Pk	34.5	-37.04	0	59.52	-	-	68.2	-8.68	38	208	H	
		5.725	57.73	Pk	34.5	-37.07	0	55.16	-	-	68.2	-13.04	20	352	V	
		5.776863	59.79	Pk	34.6	-36.75	0	57.64	-	-	68.2	-10.56	20	352	V	

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
VHT80	5530	6	* 5.46	38.83	Pk	34.4	-16.6	0	56.63	-	-	68.2	-11.57	319	164	H	
			* 5.383954	41.41	Pk	34.3	-16.7	0	59.01	-	-	74	-14.99	319	164	H	
			* 5.46	27.68	RMS	34.4	-16.6	0	45.48	54	-8.52	-	-	319	164	H	
			* 5.369677	29.23	RMS	34.3	-16.7	0	46.83	54	-7.17	-	-	319	164	H	
			* 5.369677	29.23	RMS	34.3	-16.7	0	46.83	54	-7.17	-	-	319	164	H	
			5.469164	43.73	Pk	34.3	-16.5	0	61.53	-	-	68.2	-6.67	319	164	H	
			5.47	41.54	Pk	34.3	-16.5	0	59.34	-	-	68.2	-8.86	319	164	H	
			5.47	27.51	RMS	34.3	-16.5	0	45.31	-	-	-	-	319	164	H	
			* 5.46	39.43	Pk	34.4	-16.6	0	57.23	-	-	68.2	-10.97	305	222	V	
			* 5.458788	41.6	Pk	34.3	-16.6	0	59.3	-	-	74	-14.7	305	222	V	
			* 5.46	27.44	RMS	34.4	-16.6	0	45.24	54	-8.76	-	-	305	222	V	
			* 5.357076	29.51	RMS	34.3	-16.9	0	46.91	54	-7.09	-	-	305	222	V	
			* 5.357076	29.51	RMS	34.3	-16.9	0	46.91	54	-7.09	-	-	305	222	V	
			5.468789	45.33	Pk	34.3	-16.5	0	63.13	-	-	68.2	-5.07	305	222	V	
			5.47	43.75	Pk	34.3	-16.5	0	61.55	-	-	68.2	-6.65	305	222	V	
			5.47	27.97	RMS	34.3	-16.5	0	45.77	-	-	-	-	305	222	V	
	5530	5	5.453532	64.19	Pk	34.6	-38.81	0	59.98	-	-	74	-14.02	329	184	H	
			5.458399	48.77	RMS	34.6	-38.73	0	44.64	54	-9.36	-	-	329	184	H	
			5.458399	48.77	RMS	34.6	-38.73	0	44.64	54	-9.36	-	-	329	184	H	
			5.46	59.38	Pk	34.6	-38.71	0	55.27	-	-	68.2	-12.93	329	184	H	
			5.46	47.51	RMS	34.6	-38.71	0	43.4	54	-10.6	-	-	329	184	H	
			5.469932	67.18	Pk	34.6	-38.76	0	63.02	-	-	68.2	-5.18	329	184	H	
			5.47	64.82	Pk	34.6	-38.76	0	60.66	-	-	68.2	-7.54	329	184	H	
			5.47	48.21	RMS	34.6	-38.76	0	44.05	-	-	-	-	329	184	H	
			5.458999	48.66	RMS	34.6	-38.68	0	44.58	54	-9.42	-	-	282	103	V	
			5.458999	48.66	RMS	34.6	-38.68	0	44.58	54	-9.42	-	-	282	103	V	
			5.459488	61.85	Pk	34.6	-38.69	0	57.76	-	-	74	-16.24	282	103	V	
			5.46	58.26	Pk	34.6	-38.71	0	54.15	-	-	68.2	-14.05	282	103	V	
			5.46	47.22	RMS	34.6	-38.71	0	43.11	54	-10.89	-	-	282	103	V	
			5.469288	66.85	Pk	34.6	-38.77	0	62.68	-	-	68.2	-5.52	282	103	V	
			5.47	65.43	Pk	34.6	-38.76	0	61.27	-	-	68.2	-6.93	282	103	V	
			5.47	48.08	RMS	34.6	-38.76	0	43.92	-	-	-	-	282	103	V	
	VHT160	5570 (Low BE)	6	* 5.46	60.43	Pk	34.6	-34.8	0	60.23	-	-	68.2	-7.97	86	101	H
				* 5.439536	67.59	Pk	34.5	-34.9	0	67.19	-	-	74	-6.81	86	101	H
				* 5.46	39.56	RMS	34.6	-34.8	0.11	39.47	54	-14.53	-	-	86	101	H
				* 5.440511	48.2	RMS	34.5	-34.9	0.11	47.91	54	-6.09	-	-	86	101	H
				* 5.440511	48.2	RMS	34.5	-34.9	0.11	47.91	54	-6.09	-	-	86	101	H
				5.461713	61.69	Pk	34.6	-34.8	0	61.49	-	-	68.2	-6.71	86	101	H
				5.47	54.3	Pk	34.6	-34.8	0	54.1	-	-	68.2	-14.1	86	101	H
				5.47	37.3	RMS	34.6	-34.8	0.11	37.21	-	-	-	-	86	101	H
				* 5.46	62.29	Pk	34.6	-34.8	0	62.09	-	-	68.2	-6.11	54	103	V
				* 5.439761	69.37	Pk	34.5	-34.9	0	68.97	-	-	74	-5.03	54	103	V
				* 5.46	40.17	RMS	34.6	-34.8	0.11	40.08	54	-13.92	-	-	54	103	V
				* 5.439811	49.79	RMS	34.5	-34.9	0.11	49.5	54	-4.5	-	-	54	103	V
				* 5.439811	49.79	RMS	34.5	-34.9	0.11	49.5	54	-4.5	-	-	54	103	V
				5.461188	63.48	Pk	34.6	-34.8	0	63.28	-	-	68.2	-4.92	54	103	V
				5.47	53.79	Pk	34.6	-34.8	0	53.59	-	-	68.2	-14.61	54	103	V
				5.47	38.03	RMS	34.6	-34.8	0.11	37.94	-	-	-	-	54	103	V
		5570 (High BE)		5.725	62.69	Pk	34.8	-36.16	0	61.33	-	-	68.2	-6.87	358	106	H
				5.727135	64.91	Pk	34.8	-36.21	0	63.5	-	-	68.2	-4.7	358	106	H
				5.725	62.67	Pk	34.8	-36.16	0	61.31	-	-	68.2	-6.89	329	110	V
				5.727418	63.65	Pk	34.8	-36.24	0	62.21	-	-	68.2	-5.99	329	110	V
* 5.46			62.42	Pk	34.6	-34.8	0	62.22	-	-	68.2	-5.98	277	163	H		
* 5.439561			69.52	Pk	34.5	-34.9	0	69.12	-	-	74	-4.88	277	163	H		
* 5.46			40.95	RMS	34.6	-34.8	0.11	40.86	54	-13.14	-	-	277	163	H		
* 5.43676			47.19	RMS	34.5	-34.9	0.11	46.9	54	-7.1	-	-	277	163	H		
5570 (Low BE)		* 5.43676	47.19	RMS	34.5	-34.9	0.11	46.9	54	-7.1	-	-	277	163	H		
		5.461788	63.57	Pk	34.6	-34.8	0	63.37	-	-	68.2	-4.83	277	163	H		
		5.47	54.14	Pk	34.6	-34.8	0	53.94	-	-	68.2	-14.26	277	163	H		
		5.47	40.53	RMS	34.6	-34.8	0.11	40.44	-	-	-	-	277	163	H		
		* 5.46	59.52	Pk	34.6	-34.8	0	59.32	-	-	68.2	-8.88	253	101	V		
		* 5.439361	66.28	Pk	34.5	-34.9	0	65.88	-	-	74	-8.12	253	101	V		
		* 5.46	37.82	RMS	34.6	-34.8	0.11	37.73	54	-16.27	-	-	253	101	V		
		* 5.443086	44.17	RMS	34.6	-34.9	0.11	43.98	54	-10.02	-	-	253	101	V		
		* 5.443086	44.17	RMS	34.6	-34.9	0.11	43.98	54	-10.02	-	-	253	101	V		
		5.460763	60.56	Pk	34.6	-34.8	0	60.36	-	-	68.2	-7.84	253	101	V		
		5.47	52.23	Pk	34.6	-34.8	0	52.03	-	-	68.2	-16.17	253	101	V		
		5.47	38.9	RMS	34.6	-34.8	0.11	38.81	-	-	-	-	253	101	V		
5570 (High BE)		5.725	61.51	Pk	34.8	-34.1	0	62.21	-	-	68.2	-5.99	106	130	H		
		5.725442	61.48	Pk	34.8	-34.1	0	62.18	-	-	68.2	-6.02	106	130	H		
		5.725	61.99	Pk	34.8	-34.1	0	62.69	-	-	68.2	-5.51	108	127	V		
		5.725761	62.21	Pk	34.8	-34.1	0	62.91	-	-	68.2	-5.29	108	127	V		


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

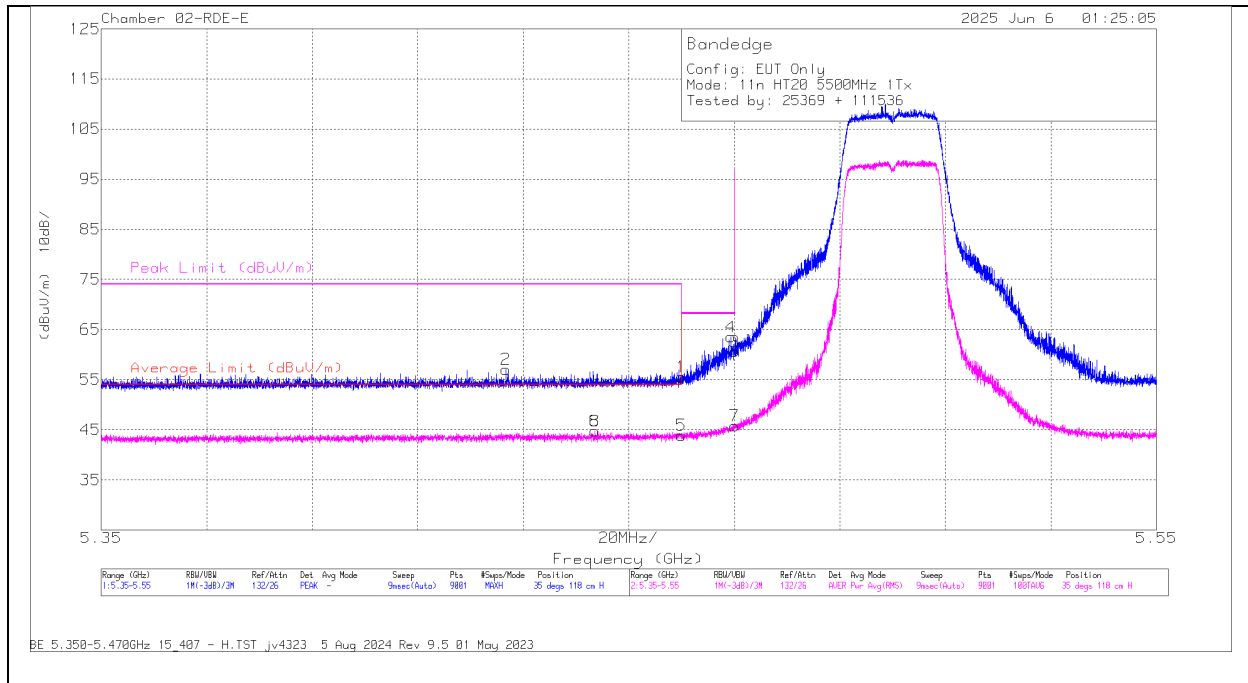

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	58.35	Pk	35.2	0	-38.01	55.54	-	-	68.2	-12.66	35	118	H
2	* 5.426666	59.96	Pk	35.1	0	-38.02	57.04	-	-	74	-16.96	35	118	H
5	* 5.46	46.75	RMS	35.2	0	-38.01	43.94	54	-10.06	-	-	35	118	H
6	* 5.443577	47.63	RMS	35.1	0	-38.01	44.72	54	-9.28	-	-	35	118	H
8	* 5.443577	47.63	RMS	35.1	0	-38.01	44.72	54	-9.28	-	-	35	118	H
4	5.468354	66.31	PK	35.2	0	-38.02	63.49	-	-	68.2	-4.71	35	118	H
3	5.47	63.41	PK	35.2	0	-38.01	60.6	-	-	68.2	-7.6	35	118	H
7	5.47	48.56	RMS	35.2	0	-38.01	45.75	-	-	-	-	35	118	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

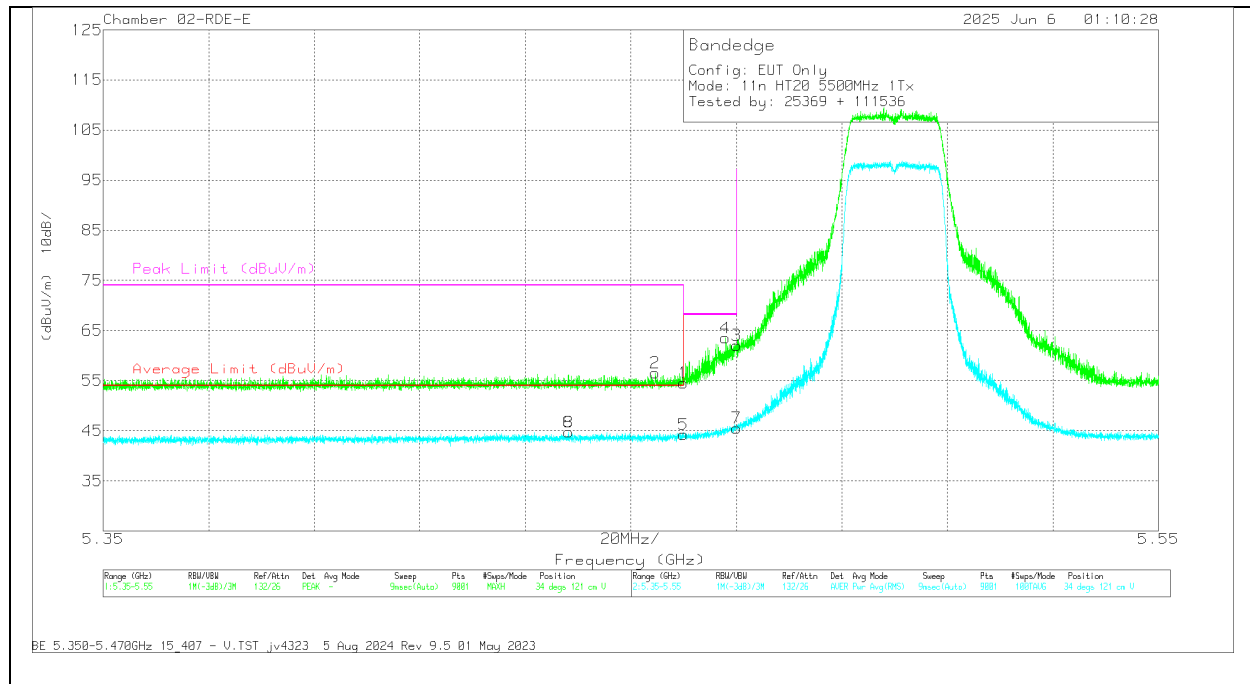

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	57.37	Pk	35.2	0	-38.01	54.56	-	-	68.2	-13.64	34	121	V
2	* 5.454621	59.5	Pk	35.1	0	-38.04	56.56	-	-	74	-17.44	34	121	V
5	* 5.46	47.03	RMS	35.2	0	-38.01	44.22	54	-9.78	-	-	34	121	V
6	* 5.438244	47.67	RMS	35.1	0	-38.06	44.71	54	-9.29	-	-	34	121	V
8	* 5.438244	47.67	RMS	35.1	0	-38.06	44.71	54	-9.29	-	-	34	121	V
4	* 5.46791	66.31	Pk	35.2	0	-38.02	63.49	-	-	68.2	-4.71	34	121	V
3	5.47	64.86	Pk	35.2	0	-38.01	62.05	-	-	68.2	-6.15	34	121	V
7	5.47	48.34	RMS	35.2	0	-38.01	45.53	-	-	-	-	34	121	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

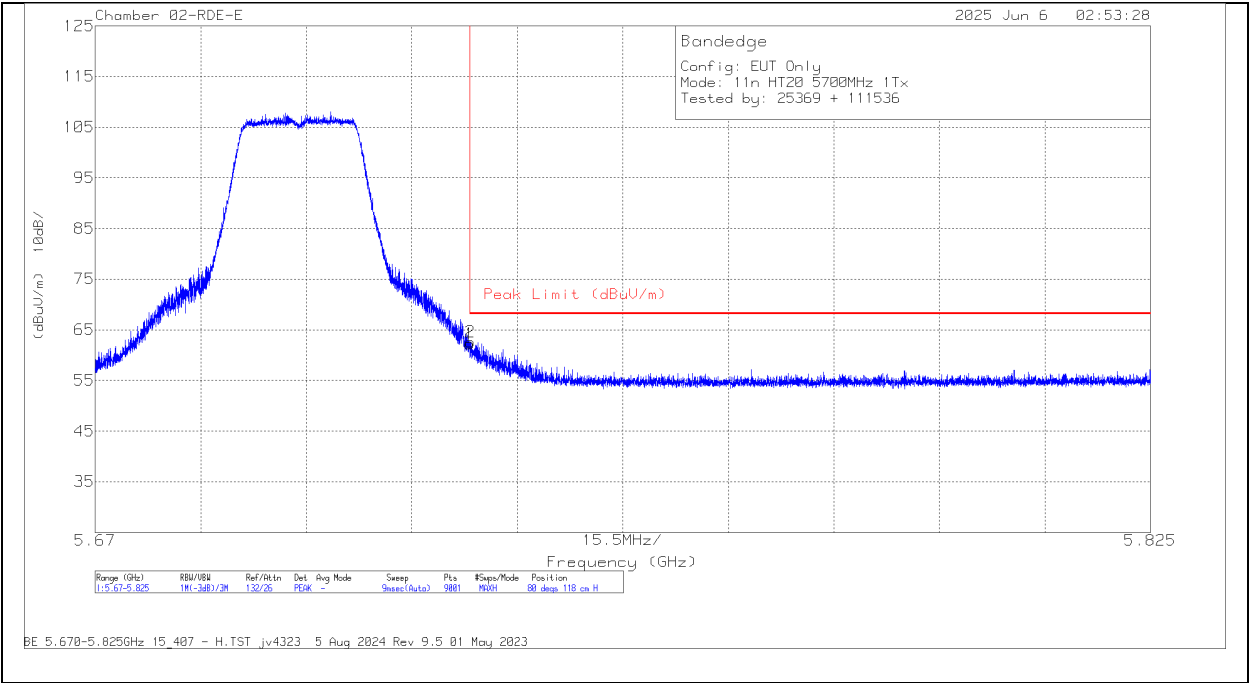


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	64.44	Pk	35	0	-37.21	62.23	68.2	-5.97	80	118	H
2	5.725128	64.8	Pk	35	0	-37.21	62.59	68.2	-5.61	80	118	H

Pk - Peak detector

BANEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

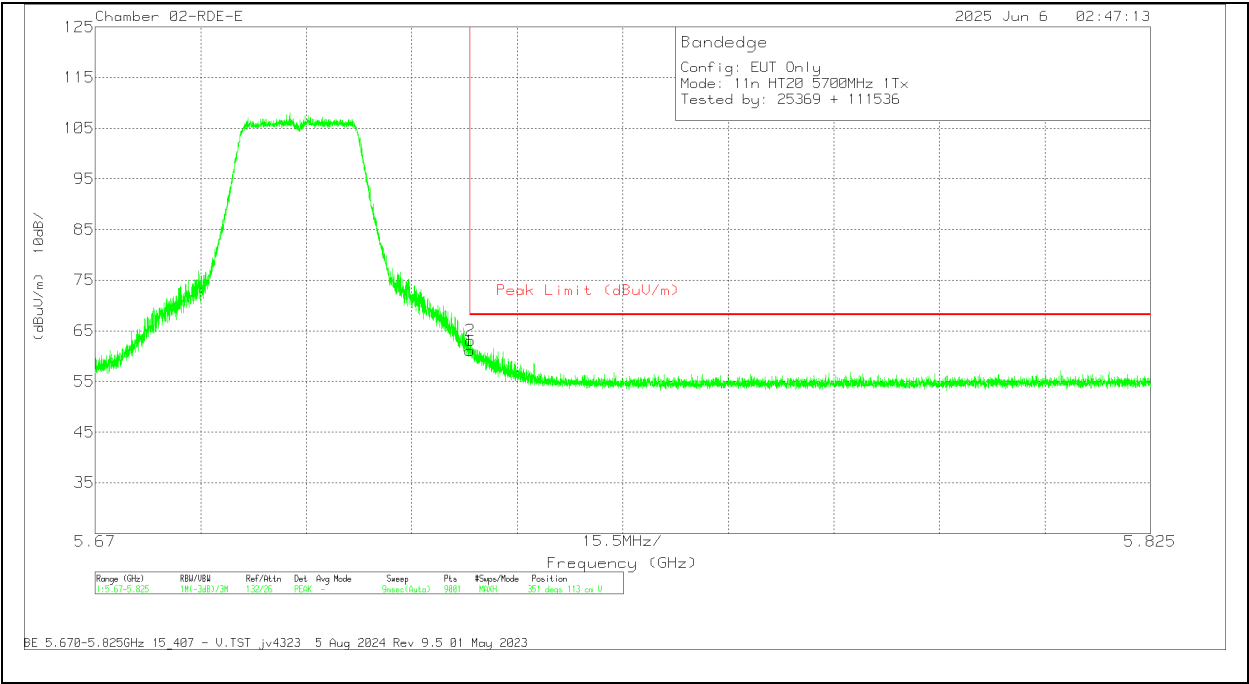

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	63.28	Pk	35	0	-37.21	61.07	68.2	-7.13	351	113	V
2	5.725128	65.3	Pk	35	0	-37.21	63.09	68.2	-5.11	351	113	V

Pk - Peak detector

1.1.18. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/l Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5500	6 + 5	* 5.46	54.55	Pk	34.6	-34.8	0	54.35	-	-	68.2	-13.85	283	101	H	
			* 5.459988	54.8	PK	34.6	-34.8	0	54.6	-	-	74	-19.4	283	101	H	
			* 5.46	40.51	RMS	34.6	-34.8	0	40.31	54	-13.69	-	-	283	101	H	
			* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H	
			* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H	
			5.469664	62.23	Pk	34.6	-34.8	0	62.03	-	-	68.2	-6.17	283	101	H	
			5.47	61.11	PK	34.6	-34.8	0	60.91	-	-	68.2	-7.29	283	101	H	
			5.47	42.97	RMS	34.6	-34.8	0	42.77	-	-	-	-	283	101	H	
			* 5.46	53.24	PK	34.6	-34.8	0	53.04	-	-	68.2	-15.16	241	131	V	
			* 5.459988	54.15	PK	34.6	-34.8	0	53.95	-	-	74	-20.05	241	131	V	
			* 5.46	40.28	RMS	34.6	-34.8	0	40.08	54	-13.92	-	-	241	131	V	
			* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V	
			* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V	
			5.469139	60.69	PK	34.6	-34.8	0	60.49	-	-	68.2	-7.71	241	131	V	
			5.47	57.51	PK	34.6	-34.8	0	57.31	-	-	68.2	-10.89	241	131	V	
			5.47	42.07	RMS	34.6	-34.8	0	41.87	-	-	-	-	241	131	V	
	5700	5.725	61.73	PK	34.9	-36.29	0	60.34	-	-	68.2	-7.86	343	101	H		
		5.725024	63.32	PK	34.9	-36.29	0	61.93	-	-	68.2	-6.27	343	101	H		
		5.725	63.71	PK	34.9	-36.29	0	62.32	-	-	68.2	-5.88	343	132	V		
		5.729261	64.82	PK	34.9	-36.3	0	63.42	-	-	68.2	-4.78	343	132	V		
	HT40	5510	6 + 5	5.439732	47.91	RMS	34.6	-38.86	0	43.65	54	-10.35	-	-	39	119	H
				5.439732	47.91	RMS	34.6	-38.86	0	43.65	54	-10.35	-	-	39	119	H
5.459266				61.65	PK	34.6	-38.69	0	57.56	-	-	74	-16.44	39	119	H	
5.46				58.58	PK	34.6	-38.71	0	54.47	-	-	68.2	-13.73	39	119	H	
5.46				46.92	RMS	34.6	-38.71	0	42.81	54	-11.19	-	-	39	119	H	
5.466488				63.83	PK	34.6	-38.79	0	59.64	-	-	68.2	-8.56	39	119	H	
5.47				62.69	PK	34.6	-38.76	0	58.53	-	-	68.2	-9.67	39	119	H	
5.47				48.08	RMS	34.6	-38.76	0	43.92	-	-	-	-	39	119	H	
5.458799				47.89	RMS	34.6	-38.7	0	43.79	54	-10.21	-	-	72	250	V	
5.458799				47.89	RMS	34.6	-38.7	0	43.79	54	-10.21	-	-	72	250	V	
5.459732				64.93	PK	34.6	-38.7	0	60.83	-	-	74	-13.17	72	250	V	
5.46				64.72	PK	34.6	-38.71	0	60.61	-	-	68.2	-7.59	72	250	V	
5.46				47.48	RMS	34.6	-38.71	0	43.37	54	-10.63	-	-	72	250	V	
5.468243				67.06	PK	34.6	-38.76	0	62.9	-	-	68.2	-5.3	72	250	V	
5.47				65.74	PK	34.6	-38.76	0	61.58	-	-	68.2	-6.62	72	250	V	
5.47				47.11	RMS	34.6	-38.76	0	42.95	-	-	-	-	72	250	V	
5670		5.725	51.15	PK	34.8	-34.1	0	51.85	-	-	68.2	-16.35	130	255	H		
		5.725224	55.21	PK	34.8	-34.1	0	55.91	-	-	68.2	-12.29	130	255	H		
		5.725	52.25	PK	34.8	-34.1	0	52.95	-	-	68.2	-15.25	88	135	V		
		5.725767	55.01	PK	34.8	-34.1	0	55.71	-	-	68.2	-12.49	88	135	V		
VHT80		5530	6 + 5	* 5.46	53.22	PK	34.6	-34.8	0	53.02	-	-	68.2	-15.18	303	207	H
				* 5.457388	60.74	PK	34.6	-34.8	0	60.54	-	-	74	-13.46	303	207	H
	* 5.46			37.71	RMS	34.6	-34.8	0	37.51	54	-16.49	-	-	303	207	H	
	* 5.457663			42.68	RMS	34.6	-34.8	0	42.48	54	-11.52	-	-	303	207	H	
	* 5.457663			42.68	RMS	34.6	-34.8	0	42.48	54	-11.52	-	-	303	207	H	
	5.467664			62.87	PK	34.6	-34.8	0	62.67	-	-	68.2	-5.53	303	207	H	
	5.47			56.37	PK	34.6	-34.8	0	56.17	-	-	68.2	-12.03	303	207	H	
	5.47			39.3	RMS	34.6	-34.8	0	39.1	-	-	-	-	303	207	H	
	* 5.46			53.51	PK	34.6	-34.8	0	53.31	-	-	68.2	-14.89	278	106	V	
	* 5.457963			61.32	PK	34.6	-34.8	0	61.12	-	-	74	-12.88	278	106	V	
	* 5.46			38.59	RMS	34.6	-34.8	0	38.39	54	-15.61	-	-	278	106	V	
	* 5.457763			43.95	RMS	34.6	-34.8	0	43.75	54	-10.25	-	-	278	106	V	
	* 5.457763			43.95	RMS	34.6	-34.8	0	43.75	54	-10.25	-	-	278	106	V	
	5.468364			63.21	PK	34.6	-34.8	0	63.01	-	-	68.2	-5.19	278	106	V	
	5.47			56.84	PK	34.6	-34.8	0	56.64	-	-	68.2	-11.56	278	106	V	
	5.47			38.76	RMS	34.6	-34.8	0	38.56	-	-	-	-	278	106	V	
VHT160	5570 (Low BE)	6 + 5	* 5.46	58.01	PK	34.6	-34.8	0	57.81	-	-	68.2	-10.39	126	202	H	
			* 5.438486	69.05	PK	34.5	-34.9	0	68.65	-	-	74	-5.35	126	202	H	
			* 5.46	38.85	RMS	34.6	-34.8	0.11	38.76	54	-15.24	-	-	126	202	H	
			* 5.442786	47.99	RMS	34.6	-34.9	0.11	47.8	54	-6.2	-	-	126	202	H	
			* 5.442786	47.99	RMS	34.6	-34.9	0.11	47.8	54	-6.2	-	-	126	202	H	
			5.463414	63.4	PK	34.6	-34.8	0	63.2	-	-	68.2	-5	126	202	H	
			5.47	54.13	PK	34.6	-34.8	0	53.93	-	-	68.2	-14.27	126	202	H	
			5.47	38.87	RMS	34.6	-34.8	0.11	38.78	-	-	-	-	126	202	H	
			* 5.46	56.15	PK	34.6	-34.8	0	55.95	-	-	68.2	-12.25	38	103	V	
			* 5.438661	66.89	PK	34.5	-34.9	0	66.49	-	-	74	-7.51	38	103	V	
			* 5.46	37.64	RMS	34.6	-34.8	0.11	37.55	54	-16.45	-	-	38	103	V	
			* 5.442661	45.01	RMS	34.6	-34.9	0.11	44.82	54	-9.18	-	-	38	103	V	
			* 5.442661	45.01	RMS	34.6	-34.9	0.11	44.82	54	-9.18	-	-	38	103	V	
			5.462839	61.23	PK	34.6	-34.8	0	61.03	-	-	68.2	-7.17	38	103	V	
			5.47	53.43	PK	34.6	-34.8	0	53.23	-	-	68.2	-14.97	38	103	V	
			5.47	38.05	RMS	34.6	-34.8	0.11	37.96	-	-	-	-	38	103	V	
5570 (High BE)	5.725	62.17	PK	34.8	-34.1	0	62.87	-	-	68.2	-5.33	131	249	H			
	5.725028	62.06	PK	34.8	-34.1	0	62.76	-	-	68.2	-5.44	131	249	H			
	5.725	51.48	PK	34.8	-34.1	0	52.18	-	-	68.2	-16.02	26	393	V			
	5.727705	54.41	PK	34.8	-34.1	0	55.11	-	-	68.2	-13.09	26	393	V			


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

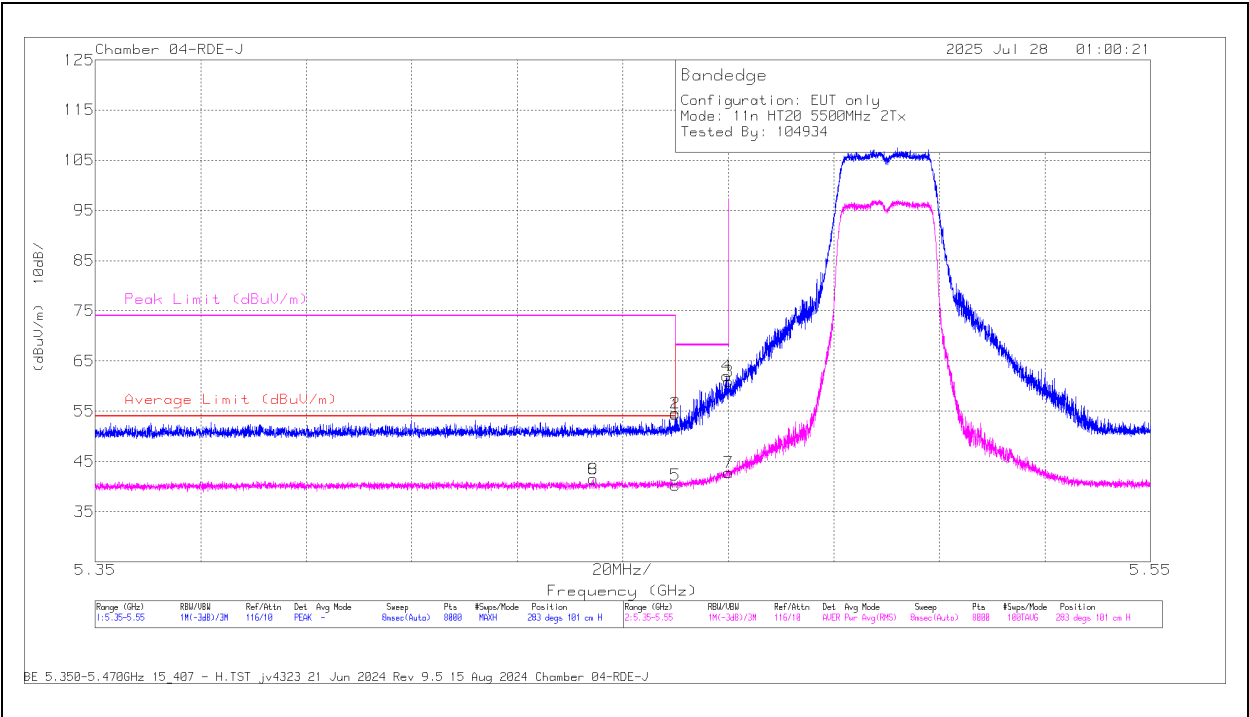


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	54.55	Pk	34.6	-34.8	0	54.35	-	-	68.2	-13.85	283	101	H
2	* 5.459988	54.8	Pk	34.6	-34.8	0	54.6	-	-	74	-19.4	283	101	H
5	* 5.46	40.51	RMS	34.6	-34.8	0	40.31	54	-13.69	-	-	283	101	H
6	* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H
8	* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H
4	5.469664	62.23	Pk	34.6	-34.8	0	62.03	-	-	68.2	-6.17	283	101	H
3	5.47	61.11	Pk	34.6	-34.8	0	60.91	-	-	68.2	-7.29	283	101	H
7	5.47	42.97	RMS	34.6	-34.8	0	42.77	-	-	-	-	283	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)


VERTICAL RESULT

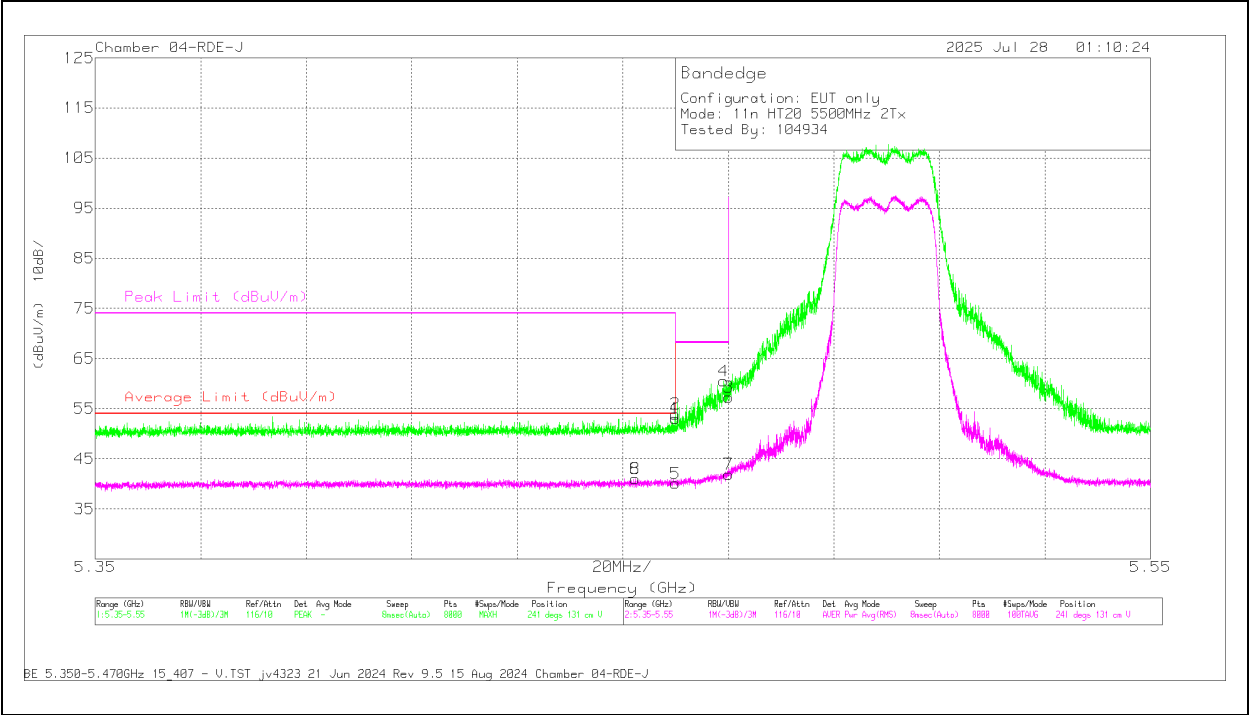

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	53.24	Pk	34.6	-34.8	0	53.04	-	-	68.2	-15.16	241	131	V
2	* 5.459988	54.15	Pk	34.6	-34.8	0	53.95	-	-	74	-20.05	241	131	V
5	* 5.46	40.28	RMS	34.6	-34.8	0	40.08	54	-13.92	-	-	241	131	V
6	* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V
8	* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V
4	5.469139	60.69	Pk	34.6	-34.8	0	60.49	-	-	68.2	-7.71	241	131	V
3	5.47	57.51	Pk	34.6	-34.8	0	57.31	-	-	68.2	-10.89	241	131	V
7	5.47	42.07	RMS	34.6	-34.8	0	41.87	-	-	-	-	241	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEGE (HIGH CHANNEL / 5700MHz)
HORIZONTAL RESULT

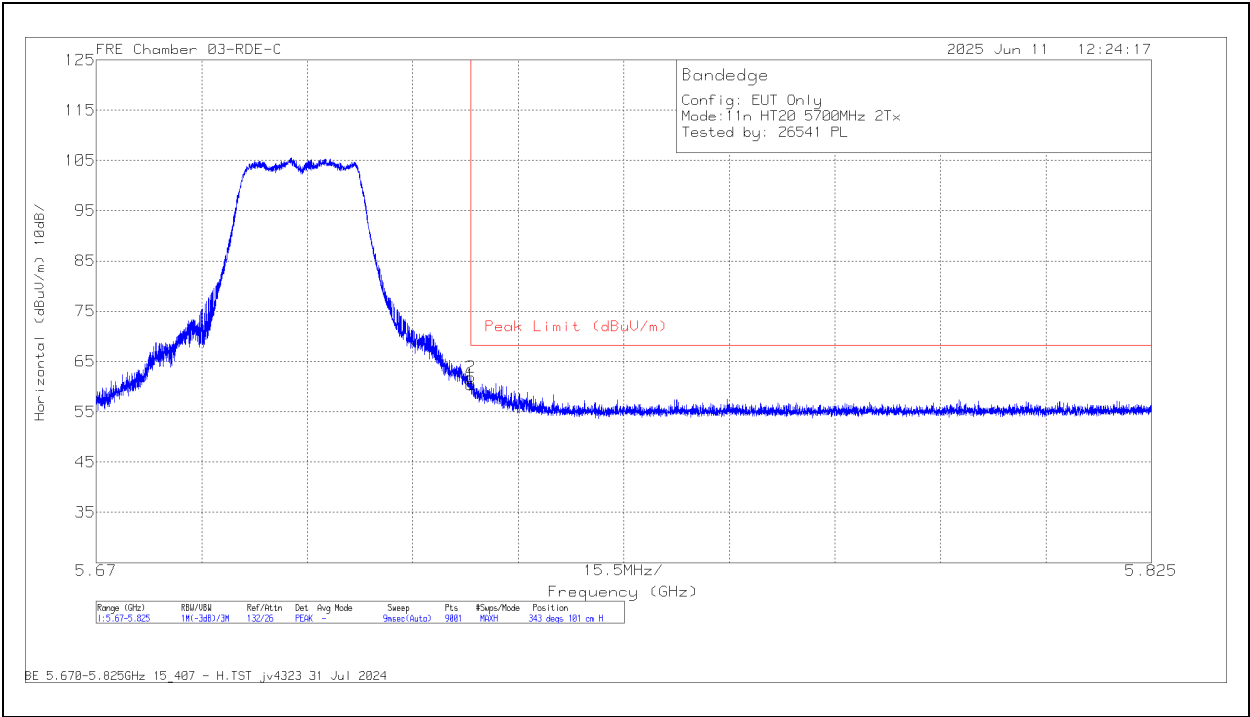


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.73	Pk	34.9	0	-36.29	60.34	68.2	-7.86	343	101	H
2	5.725024	63.32	Pk	34.9	0	-36.29	61.93	68.2	-6.27	343	101	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)
VERTICAL RESULT

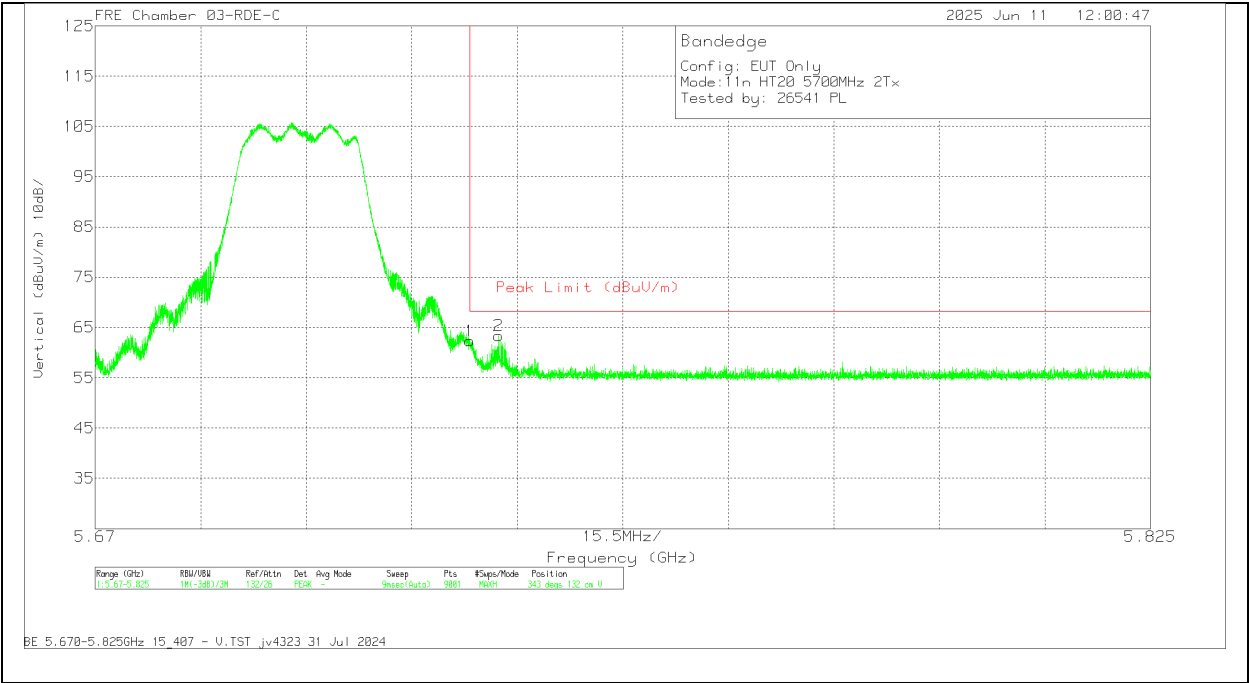

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	63.71	Pk	34.9	0	-36.29	62.32	68.2	-5.88	343	132	V
2	5.729261	64.82	Pk	34.9	0	-36.3	63.42	68.2	-4.78	343	132	V

Pk - Peak detector

1.1.19. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5500	6	* 5.46	55.9	Pk	34.6	-34.8	0	55.7	-	-	68.2	-12.5	85	101	H
			* 5.458638	58.23	Pk	34.6	-34.8	0	58.03	-	-	74	-15.97	85	101	H
			* 5.46	38.93	RMS	34.6	-34.8	0	38.73	54	-15.27	-	-	85	101	H
			* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
			* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
			5.469964	63.16	Pk	34.6	-34.8	0	62.96	-	-	68.2	-5.24	85	101	H
			5.47	61.32	Pk	34.6	-34.8	0	61.12	-	-	68.2	-7.08	85	101	H
			5.47	44.44	RMS	34.6	-34.8	0	44.24	-	-	-	-	85	101	H
			* 5.46	55.8	Pk	34.6	-34.8	0	55.6	-	-	68.2	-12.6	62	101	V
			* 5.459313	56.78	Pk	34.6	-34.8	0	56.58	-	-	74	-17.42	62	101	V
			* 5.46	39.68	RMS	34.6	-34.8	0	39.48	54	-14.52	-	-	62	101	V
			* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
			* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
			5.469989	63.47	Pk	34.6	-34.8	0	63.27	-	-	68.2	-4.93	62	101	V
			5.47	63.72	Pk	34.6	-34.8	0	63.52	-	-	68.2	-4.68	62	101	V
			5.47	44.68	RMS	34.6	-34.8	0	44.48	-	-	-	-	62	101	V
			5.725	62.33	Pk	34.8	-34.1	0	63.03	-	-	68.2	-5.17	189	103	H
			5.725147	62.9	Pk	34.8	-34.1	0	63.6	-	-	68.2	-4.6	189	103	H
			5.725	60.66	Pk	34.8	-34.1	0	61.36	-	-	68.2	-6.84	165	118	V
			5.726426	60.78	Pk	34.8	-34.1	0	61.48	-	-	68.2	-6.72	165	118	V
	5500	5	* 5.46	53.79	Pk	34.6	-34.8	0	53.59	-	-	68.2	-14.61	124	177	H
			* 5.459788	56.72	Pk	34.6	-34.8	0	56.52	-	-	74	-17.48	124	177	H
			* 5.46	38.95	RMS	34.6	-34.8	0	38.75	54	-15.25	-	-	124	177	H
			* 5.459688	39.28	RMS	34.6	-34.8	0	39.08	54	-14.92	-	-	124	177	H
			* 5.459688	39.28	RMS	34.6	-34.8	0	39.08	54	-14.92	-	-	124	177	H
			5.468339	60.28	Pk	34.6	-34.8	0	60.08	-	-	68.2	-8.12	124	177	H
			5.47	58.19	Pk	34.6	-34.8	0	57.99	-	-	68.2	-10.21	124	177	H
			5.47	43.81	RMS	34.6	-34.8	0	43.61	-	-	-	-	124	177	H
			* 5.46	53.11	Pk	34.6	-34.8	0	52.91	-	-	68.2	-15.29	87	107	V
			* 5.458188	55.16	Pk	34.6	-34.8	0	54.96	-	-	74	-19.04	87	107	V
			* 5.46	37.71	RMS	34.6	-34.8	0	37.51	54	-16.49	-	-	87	107	V
			* 5.459138	38.51	RMS	34.6	-34.8	0	38.31	54	-15.69	-	-	87	107	V
			* 5.459138	38.51	RMS	34.6	-34.8	0	38.31	54	-15.69	-	-	87	107	V
			5.469714	58.91	Pk	34.6	-34.8	0	58.71	-	-	68.2	-9.49	87	107	V
			5.47	55.92	Pk	34.6	-34.8	0	55.72	-	-	68.2	-12.48	87	107	V
			5.47	42.31	RMS	34.6	-34.8	0	42.11	-	-	-	-	87	107	V
			5.725	58.55	Pk	34.8	-34.1	0	59.25	-	-	68.2	-8.95	273	137	H
			5.725244	62.58	Pk	34.8	-34.1	0	63.28	-	-	68.2	-4.92	273	137	H
			5.725	61.88	Pk	34.8	-34.1	0	62.58	-	-	68.2	-5.62	184	113	V
			5.72505	62.75	Pk	34.8	-34.1	0	63.45	-	-	68.2	-4.75	184	113	V
EHT40 (SU Mode)	5510	6	* 5.46	40.49	Pk	34.4	-16.6	0	58.29	-	-	68.2	-9.91	129	133	H
			* 5.459388	43.45	Pk	34.3	-16.6	0	61.15	-	-	74	-12.85	129	133	H
			* 5.46	28.19	RMS	34.4	-16.6	0	45.99	54	-8.01	-	-	129	133	H
			* 5.368427	29.37	RMS	34.3	-16.7	0	46.97	54	-7.03	-	-	129	133	H
			* 5.368427	29.37	RMS	34.3	-16.7	0	46.97	54	-7.03	-	-	129	133	H
			5.469914	44.48	Pk	34.3	-16.5	0	62.28	-	-	68.2	-5.92	129	133	H
			5.47	43.3	Pk	34.3	-16.5	0	61.1	-	-	68.2	-7.1	129	133	H
			5.47	28.21	RMS	34.3	-16.5	0	46.01	-	-	-	-	129	133	H
			* 5.46	41.88	Pk	34.4	-16.6	0	59.68	-	-	68.2	-8.52	115	152	V
			* 5.458788	43.39	Pk	34.3	-16.6	0	61.09	-	-	74	-12.91	115	152	V
			* 5.46	27.81	RMS	34.4	-16.6	0	45.61	54	-8.39	-	-	115	152	V
			* 5.382854	29.47	RMS	34.3	-16.7	0	47.07	54	-6.93	-	-	115	152	V
			* 5.382854	29.47	RMS	34.3	-16.7	0	47.07	54	-6.93	-	-	115	152	V
			5.465939	45.07	Pk	34.4	-16.5	0	62.97	-	-	68.2	-5.23	115	152	V
			5.47	43.67	Pk	34.3	-16.5	0	61.47	-	-	68.2	-6.73	115	152	V
			5.47	28.18	RMS	34.3	-16.5	0	45.98	-	-	-	-	115	152	V
			5.725	42.34	Pk	34.5	-17.4	0	59.44	-	-	68.2	-8.76	330	221	H
			5.726048	45.02	Pk	34.5	-17.5	0	62.02	-	-	68.2	-6.18	330	221	H
			5.725	43.45	Pk	34.5	-17.4	0	60.55	-	-	68.2	-7.65	278	186	V
			5.726335	45.88	Pk	34.5	-17.4	0	62.98	-	-	68.2	-5.22	278	186	V
	5510	5	* 5.46	40.32	Pk	34.4	-16.6	0	58.12	-	-	68.2	-10.08	231	148	H
			* 5.457488	42.28	Pk	34.3	-16.5	0	60.08	-	-	74	-13.92	231	148	H
			* 5.46	27.72	RMS	34.4	-16.6	0	45.52	54	-8.48	-	-	231	148	H
			* 5.39178	28.98	RMS	34.4	-16.7	0	46.68	54	-7.32	-	-	231	148	H
			* 5.39178	28.98	RMS	34.4	-16.7	0	46.68	54	-7.32	-	-	231	148	H
			5.467964	45.04	Pk	34.3	-16.5	0	62.84	-	-	68.2	-5.36	231	148	H
			5.47	42.48	Pk	34.3	-16.5	0	60.28	-	-	68.2	-7.92	231	148	H
			5.47	28.29	RMS	34.3	-16.5	0	46.09	-	-	-	-	231	148	H
			* 5.46	40.07	Pk	34.4	-16.6	0	57.87	-	-	68.2	-10.33	201	106	V
			* 5.454638	41.32	Pk	34.3	-16.5	0	59.12	-	-	74	-14.88	201	106	V
			* 5.46	27.68	RMS	34.4	-16.6	0	45.48	54	-8.52	-	-	201	106	V
			* 5.356051	29.29	RMS	34.3	-16.8	0	46.79	54	-7.21	-	-	201	106	V
			* 5.356051	29.29	RMS	34.3	-16.8	0	46.79	54	-7.21	-	-	201	106	V
			5.467289	44.36	Pk	34.3	-16.6	0	62.06	-	-	68.2	-6.14	201	106	V
			5.47	40.99	Pk	34.3	-16.5	0	58.79	-	-	68.2	-9.41	201	106	V
			5.47	28.46	RMS	34.3	-16.5	0	46.26	-	-	-	-	201	106	V
			5.725	43.26	Pk	34.5	-17.4	0	60.36	-	-	68.2	-7.84	226	178	H
			5.725251	45.91	Pk	34.5	-17.4	0	63.01	-	-	68.2	-5.19	226	178	H
			5.725	43.85	Pk	34.5	-17.4	0	60.95	-	-	68.2	-7.25	156	100	V
			5.725219	46.02	Pk	34.5	-17.4	0	63.12	-	-	68.2	-5.08	156	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	5530	6	* 5.46	40.5	Pk	34.4	-16.6	0	58.3	-	-	68.2	-9.9	119	124	H
			* 5.453812	44.03	Pk	34.3	-16.5	0	61.83	-	-	74	-12.17	119	124	H
			* 5.46	28.35	RMS	34.4	-16.6	0	46.15	54	-7.85	-	-	119	124	H
			* 5.442961	29.22	RMS	34.4	-16.6	0	47.02	54	-6.98	-	-	119	124	H
			* 5.442961	29.22	RMS	34.4	-16.6	0	47.02	54	-6.98	-	-	119	124	H
			5.468514	44.92	Pk	34.3	-16.5	0	62.72	-	-	68.2	-5.48	119	124	H
			5.47	40.85	Pk	34.3	-16.5	0	58.65	-	-	68.2	-9.55	119	124	H
			5.47	28.25	RMS	34.3	-16.5	0	46.05	-	-	-	-	119	124	H
			* 5.46	39.27	Pk	34.4	-16.6	0	57.07	-	-	68.2	-11.13	106	129	V
			* 5.444386	42.5	Pk	34.4	-16.6	0	60.3	-	-	74	-13.7	106	129	V
			* 5.46	28.03	RMS	34.4	-16.6	0	45.83	54	-8.17	-	-	106	129	V
			* 5.395931	29.14	RMS	34.3	-16.7	0	46.74	54	-7.26	-	-	106	129	V
			* 5.395931	29.14	RMS	34.3	-16.7	0	46.74	54	-7.26	-	-	106	129	V
			5.469414	44.07	Pk	34.3	-16.5	0	61.87	-	-	68.2	-6.33	106	129	V
			5.47	39.98	Pk	34.3	-16.5	0	57.78	-	-	68.2	-10.42	106	129	V
			5.47	28.17	RMS	34.3	-16.5	0	45.97	-	-	-	-	106	129	V
	5610		5.725	40.65	Pk	34.5	-17.4	0	57.75	-	-	68.2	-10.45	139	154	H
			5.733316	42.18	Pk	34.6	-17.3	0	59.48	-	-	68.2	-8.72	139	154	H
			5.725	41.44	Pk	34.5	-17.4	0	58.54	-	-	68.2	-9.66	106	122	V
		5.733157	42.66	Pk	34.6	-17.3	0	59.96	-	-	68.2	-8.24	106	122	V	
	5530	5	* 5.460	47.16	Pk	34.5	-23.95	0	57.71	-	-	68.2	-10.49	80	243	H
			* 5.427333	48.94	Pk	34.5	-24	0	59.44	-	-	74	-14.56	80	243	H
			* 5.460	34.34	RMS	34.5	-23.95	0	44.89	54	-9.11	-	-	80	243	H
			* 5.457021	35.13	RMS	34.5	-23.94	0	45.69	54	-8.31	-	-	80	243	H
			* 5.457021	35.13	RMS	34.5	-23.94	0	45.69	54	-8.31	-	-	80	243	H
			5.467554	53.02	Pk	34.5	-23.9	0	63.62	-	-	68.2	-4.58	80	243	H
			5.47	46.65	Pk	34.5	-23.84	0	57.31	-	-	68.2	-10.89	80	243	H
			5.47	35.4	RMS	34.5	-23.84	0	46.06	-	-	-	-	80	243	H
			* 5.460	44.4	Pk	34.5	-23.95	0	54.95	-	-	68.2	-13.25	116	121	V
			* 5.459466	49.42	Pk	34.5	-23.93	0	59.99	-	-	74	-14.01	116	121	V
			* 5.460	33.93	RMS	34.5	-23.95	0	44.48	54	-9.52	-	-	116	121	V
			* 5.452377	34.73	RMS	34.5	-24.03	0	45.2	54	-8.8	-	-	116	121	V
			* 5.452377	34.73	RMS	34.5	-24.03	0	45.2	54	-8.8	-	-	116	121	V
			5.467066	51.07	Pk	34.5	-23.91	0	61.66	-	-	68.2	-6.54	116	121	V
			5.47	46.05	Pk	34.5	-23.84	0	56.71	-	-	68.2	-11.49	116	121	V
			5.47	33.86	RMS	34.5	-23.84	0	44.52	-	-	-	-	116	121	V
			5610	5.725	62.64	Pk	35.1	-38.19	0	59.55	-	-	68.2	-8.65	317	131
	5.727446			65.72	Pk	35.1	-38.28	0	62.54	-	-	68.2	-5.66	317	131	H
5.725	62.66			Pk	35.1	-38.19	0	59.57	-	-	68.2	-8.63	277	102	V	
5.725265	64.45			Pk	35.1	-38.2	0	61.35	-	-	68.2	-6.85	277	102	V	
EHT160 (SU Mode)	5570 (Low BE)	6	* 5.46	60.09	Pk	34.6	-34.8	0	59.89	-	-	68.2	-8.31	275	148	H
			* 5.447512	63.58	Pk	34.6	-34.8	0	63.38	-	-	74	-10.62	275	148	H
			* 5.46	45.31	RMS	34.6	-34.8	0.14	45.25	54	-8.75	-	-	275	148	H
			* 5.450962	47.32	RMS	34.6	-34.8	0.14	47.26	54	-6.74	-	-	275	148	H
			* 5.450962	47.32	RMS	34.6	-34.8	0.14	47.26	54	-6.74	-	-	275	148	H
			5.467314	63.75	Pk	34.6	-34.8	0	63.55	-	-	68.2	-4.65	275	148	H
			5.47	60.06	Pk	34.6	-34.8	0	59.86	-	-	68.2	-8.34	275	148	H
			5.47	45.51	RMS	34.6	-34.8	0.14	45.45	-	-	-	-	275	148	H
			* 5.46	59.6	Pk	34.6	-34.8	0	59.4	-	-	68.2	-8.8	182	104	V
			* 5.447837	62.13	Pk	34.6	-34.8	0	61.93	-	-	74	-12.07	182	104	V
			* 5.46	44.84	RMS	34.6	-34.8	0.14	44.78	54	-9.22	-	-	182	104	V
			* 5.447787	46.32	RMS	34.6	-34.8	0.14	46.26	54	-7.74	-	-	182	104	V
			* 5.447787	46.32	RMS	34.6	-34.8	0.14	46.26	54	-7.74	-	-	182	104	V
			5.465314	61.84	Pk	34.6	-34.8	0	61.64	-	-	68.2	-6.56	182	104	V
			5.47	59.76	Pk	34.6	-34.8	0	59.56	-	-	68.2	-8.64	182	104	V
			5.47	44.48	RMS	34.6	-34.8	0.14	44.42	-	-	-	-	182	104	V
			5570 (High BE)	5.725	41.32	Pk	34.5	-17.4	0	58.42	-	-	68.2	-9.78	137	102
	5.725474			45.85	Pk	34.5	-17.4	0	62.95	-	-	68.2	-5.25	137	102	H
	5.725			43.87	Pk	34.5	-17.4	0	60.97	-	-	68.2	-7.23	96	135	V
	5.726111			46.47	Pk	34.5	-17.5	0	63.47	-	-	68.2	-4.73	96	135	V
	5570 (Low BE)	5	* 5.46	59.49	Pk	34.6	-34.8	0	59.29	-	-	68.2	-8.91	190	165	H
			* 5.447637	62.83	Pk	34.6	-34.8	0	62.63	-	-	74	-11.37	190	165	H
			* 5.46	45.08	RMS	34.6	-34.8	0.14	45.02	54	-8.98	-	-	190	165	H
			* 5.448112	46.76	RMS	34.6	-34.9	0.14	46.6	54	-7.4	-	-	190	165	H
			* 5.448112	46.76	RMS	34.6	-34.9	0.14	46.6	54	-7.4	-	-	190	165	H
			5.467789	63.5	Pk	34.6	-34.8	0	63.3	-	-	68.2	-4.9	190	165	H
			5.47	60.03	Pk	34.6	-34.8	0	59.83	-	-	68.2	-8.37	190	165	H
			5.47	45.31	RMS	34.6	-34.8	0.14	45.25	-	-	-	-	190	165	H
			* 5.46	58.68	Pk	34.6	-34.8	0	58.48	-	-	68.2	-9.72	153	105	V
			* 5.447712	61.96	Pk	34.6	-34.8	0	61.76	-	-	74	-12.24	153	105	V
			* 5.46	43.94	RMS	34.6	-34.8	0.14	43.88	54	-10.12	-	-	153	105	V
			* 5.448412	46.15	RMS	34.6	-34.9	0.14	45.99	54	-8.01	-	-	153	105	V
			* 5.448412	46.15	RMS	34.6	-34.9	0.14	45.99	54	-8.01	-	-	153	105	V
			5.469339	62.08	Pk	34.6	-34.8	0	61.88	-	-	68.2	-6.32	153	105	V
			5.47	59.37	Pk	34.6	-34.8	0	59.17	-	-	68.2	-9.03	153	105	V
			5.47	43.89	RMS	34.6	-34.8	0.14	43.83	-	-	-	-	153	105	V
			5570 (High BE)	5.725	54.62	Pk	34.8	-34.1	0	55.32	-	-	68.2	-12.88	182	163
	5.725729			56.06	Pk	34.8	-34.1	0	56.76	-	-	68.2	-11.44	182	163	H
5.725	53.15			Pk	34.8	-34.1	0	53.85	-	-	68.2	-14.35	246	149	V	
5.725187	54.17			Pk	34.8	-34.1	0	54.87	-	-	68.2	-13.33	246	149	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

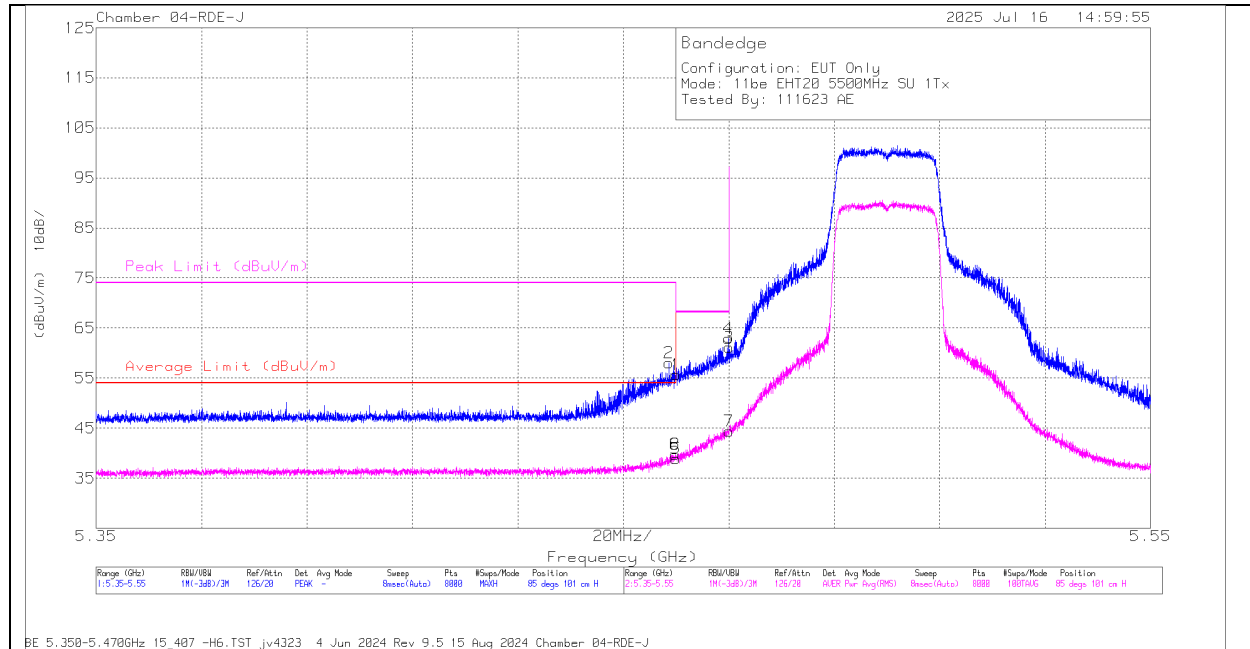BANDEDGE (LOW CHANNEL / 5500MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.9	Pk	34.6	-34.8	0	55.7	-	-	68.2	-12.5	85	101	H
2	* 5.458638	58.23	Pk	34.6	-34.8	0	58.03	-	-	74	-15.97	85	101	H
5	* 5.46	38.93	RMS	34.6	-34.8	0	38.73	54	-15.27	-	-	85	101	H
6	* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
8	* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
4	5.469964	63.16	Pk	34.6	-34.8	0	62.96	-	-	68.2	-5.24	85	101	H
3	5.47	61.32	Pk	34.6	-34.8	0	61.12	-	-	68.2	-7.08	85	101	H
7	5.47	44.44	RMS	34.6	-34.8	0	44.24	-	-	-	-	85	101	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

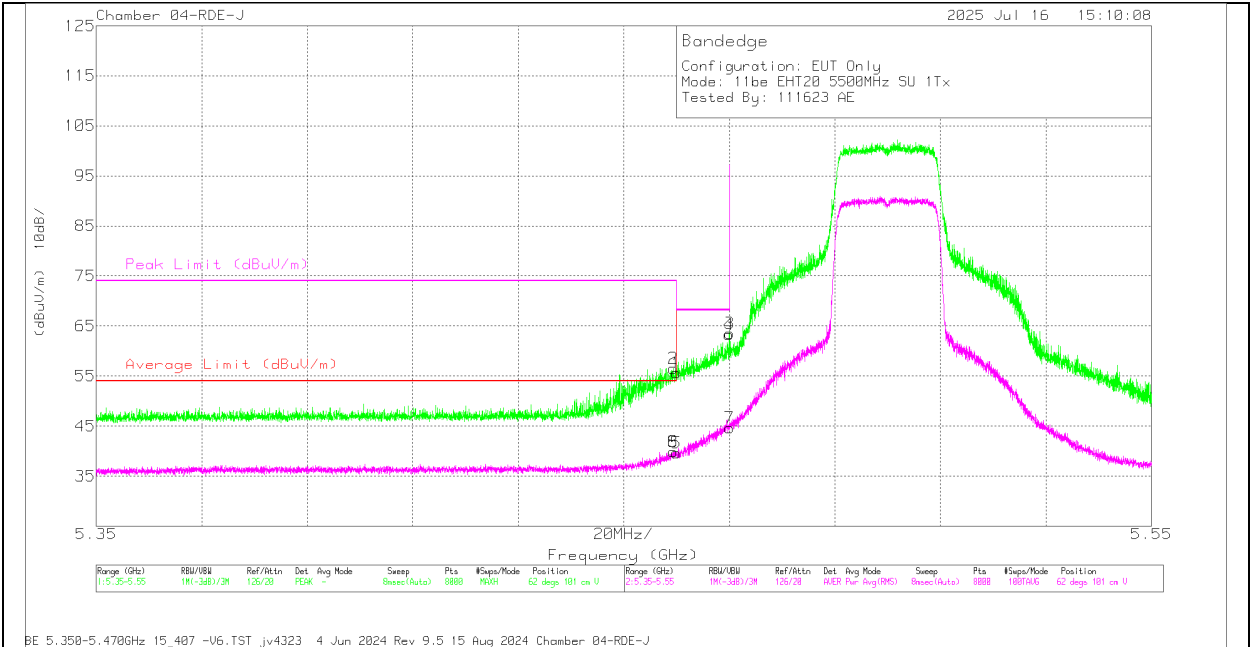


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.8	Pk	34.6	-34.8	0	55.6	-	-	68.2	-12.6	62	101	V
2	* 5.459313	56.78	Pk	34.6	-34.8	0	56.58	-	-	74	-17.42	62	101	V
5	* 5.46	39.68	RMS	34.6	-34.8	0	39.48	54	-14.52	-	-	62	101	V
6	* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
8	* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
4	5.469999	63.47	Pk	34.6	-34.8	0	63.27	-	-	68.2	-4.93	62	101	V
3	5.47	63.72	Pk	34.6	-34.8	0	63.52	-	-	68.2	-4.68	62	101	V
7	5.47	44.68	RMS	34.6	-34.8	0	44.48	-	-	-	-	62	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

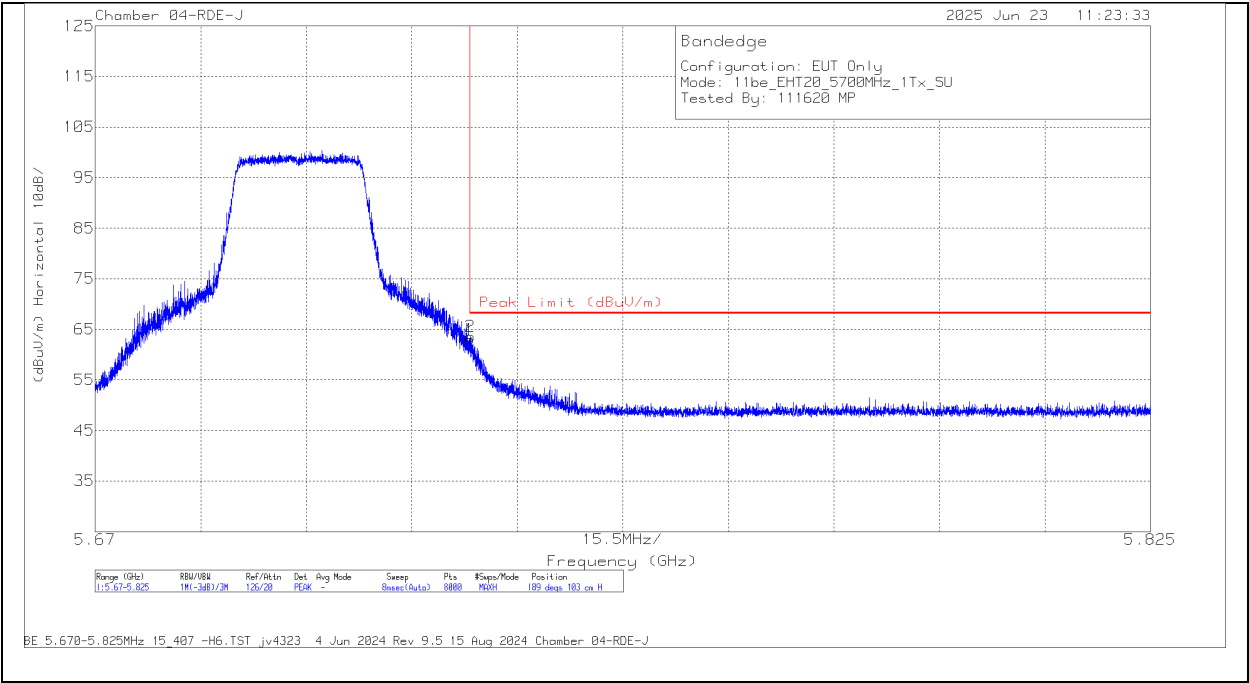


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.33	Pk	34.8	-34.1	0	63.03	68.2	-5.17	189	103	H
2	5.725147	62.9	Pk	34.8	-34.1	0	63.6	68.2	-4.6	189	103	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

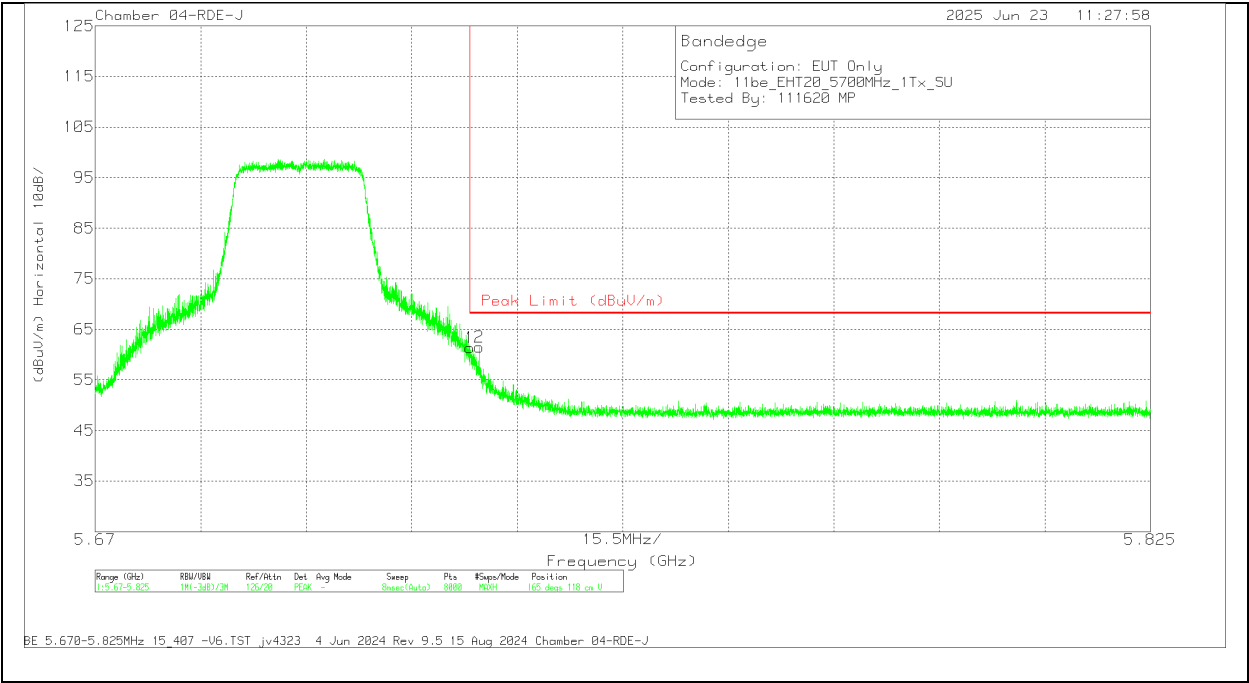

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.66	Pk	34.8	-34.1	0	61.36	68.2	-6.84	165	118	V
2	5.726426	60.78	Pk	34.8	-34.1	0	61.48	68.2	-6.72	165	118	V

Pk - Peak detector

1.1.20. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5500	6	* 5.46	56.19	Pk	34.3	-35.5	0	54.99	-	-	68.2	-13.21	169	107	H
			* 5.375511	58.6	Pk	34.4	-35.5	0	57.5	-	-	74	-16.5	169	107	H
			5.47	58.28	Pk	34.3	-35.6	0	56.98	-	-	68.2	-11.22	169	107	H
			5.468021	61.54	Pk	34.3	-35.6	0	60.24	-	-	68.2	-7.96	169	107	H
			* 5.46	44.88	RMS	34.3	-35.5	0	43.68	54	-10.32	-	-	169	107	H
			* 5.449755	46.42	RMS	34.3	-35.42	0	45.3	54	-8.7	-	-	169	107	H
			5.47	45.35	RMS	34.3	-35.6	0	44.05	-	-	-	-	169	107	H
			* 5.449755	46.42	RMS	34.3	-35.42	0	45.3	54	-8.7	-	-	169	107	H
			* 5.46	55.86	Pk	34.3	-35.5	0	54.66	-	-	68.2	-13.54	167	117	V
			* 5.441732	58.16	Pk	34.3	-35.43	0	57.03	-	-	74	-16.97	167	117	V
			5.47	59.87	Pk	34.3	-35.6	0	58.57	-	-	68.2	-9.63	167	117	V
			5.46971	61.56	Pk	34.3	-35.6	0	60.26	-	-	68.2	-7.94	167	117	V
			* 5.46	45.68	RMS	34.3	-35.5	0	44.48	54	-9.52	-	-	167	117	V
			* 5.437977	46.62	RMS	34.3	-35.6	0	45.32	54	-8.68	-	-	167	117	V
			5.47	45.12	RMS	34.3	-35.6	0	43.82	-	-	-	-	167	117	V
EHT20 (52T / Index 40)	5700		* 5.437977	46.62	RMS	34.3	-35.6	0	45.32	54	-8.68	-	-	167	117	V
			5.725	62.72	Pk	34.6	-38.8	0	58.52	-	-	68.2	-9.68	171	123	H
			5.725024	63.89	Pk	34.6	-38.8	0	59.69	-	-	68.2	-8.51	171	123	H
			5.725	61.04	Pk	34.6	-38.8	0	56.84	-	-	68.2	-11.36	142	239	V
			5.727814	63.24	Pk	34.6	-38.8	0	59.04	-	-	68.2	-9.16	142	239	V
EHT20 (52T / Index 37)	5500	5	5.362089	46.78	RMS	34.6	-36.49	0	44.89	54	-9.11	-	-	282	187	H
			5.362089	46.78	RMS	34.6	-36.49	0	44.89	54	-9.11	-	-	282	187	H
			5.366622	59.47	Pk	34.5	-36.64	0	57.33	-	-	74	-16.67	282	187	H
			5.46	55.91	Pk	34.5	-36.55	0	53.86	-	-	68.2	-14.34	282	187	H
			5.46	45.21	RMS	34.5	-36.55	0	43.16	54	-10.84	-	-	282	187	H
			5.464221	58.07	Pk	34.5	-36.46	0	56.11	-	-	68.2	-12.09	282	187	H
			5.47	56.11	Pk	34.5	-36.46	0	54.15	-	-	68.2	-14.05	282	187	H
			5.47	45.03	RMS	34.5	-36.46	0	43.07	-	-	-	-	282	187	H
			5.3578	59.02	Pk	34.6	-36.58	0	57.04	-	-	74	-16.96	345	120	V
			5.375044	46.66	RMS	34.6	-36.56	0	44.7	54	-9.3	-	-	345	120	V
			5.375044	46.66	RMS	34.6	-36.56	0	44.7	54	-9.3	-	-	345	120	V
			5.46	55.71	Pk	34.5	-36.55	0	53.66	-	-	68.2	-14.54	345	120	V
			5.46	44.58	RMS	34.5	-36.55	0	42.53	54	-11.47	-	-	345	120	V
			5.461177	57.24	Pk	34.5	-36.52	0	55.22	-	-	68.2	-12.98	345	120	V
			5.47	55.68	Pk	34.5	-36.46	0	53.72	-	-	68.2	-14.48	345	120	V
			5.47	44.95	RMS	34.5	-36.46	0	42.99	-	-	-	-	345	120	V
EHT20 (52T / Index 40)	5700		5.725	56.11	Pk	34.8	-36.16	0	54.75	-	-	68.2	-13.45	224	244	H
			5.725765	58.42	Pk	34.8	-36.16	0	57.06	-	-	68.2	-11.14	224	244	H
			5.725	57.74	Pk	34.8	-36.16	0	56.38	-	-	68.2	-11.82	351	192	V
			5.730708	58.38	Pk	34.8	-36.25	0	56.93	-	-	68.2	-11.27	351	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/ Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (242T / Index 61)	5510	6	* 5.460	41.33	Pk	34.6	-23.31	0	52.62	-	-	68.2	-15.58	231	198	H
			* 5.45971	44.75	Pk	34.6	-23.34	0	56.01	-	-	74	-17.99	231	198	H
			* 5.460	30.12	RMS	34.6	-23.31	0	41.41	54	-12.59	-	-	231	198	H
			* 5.452266	30.8	RMS	34.6	-23.41	0	41.99	54	-12.01	-	-	231	198	H
			* 5.452266	30.8	RMS	34.6	-23.41	0	41.99	54	-12.01	-	-	231	198	H
			5.469799	51.63	Pk	34.6	-23.26	0	62.97	-	-	68.2	-5.23	231	198	H
			5.47	48.63	Pk	34.6	-23.27	0	59.96	-	-	68.2	-8.24	231	198	H
			5.47	31.91	RMS	34.6	-23.27	0	43.24	-	-	-	-	231	198	H
			* 5.460	39.8	Pk	34.6	-23.31	0	51.09	-	-	68.2	-17.11	157	333	V
			* 5.364133	42.1	Pk	34.6	-23.32	0	53.38	-	-	74	-20.62	157	333	V
			* 5.460	28.78	RMS	34.6	-23.31	0	40.07	54	-13.93	-	-	157	333	V
			* 5.442844	30.06	RMS	34.6	-23.33	0	41.33	54	-12.67	-	-	157	333	V
			* 5.442844	30.06	RMS	34.6	-23.33	0	41.33	54	-12.67	-	-	157	333	V
			5.469532	45.89	Pk	34.6	-23.24	0	57.25	-	-	68.2	-10.95	157	333	V
			5.47	42.82	Pk	34.6	-23.27	0	54.15	-	-	68.2	-14.05	157	333	V
			5.47	29.73	RMS	34.6	-23.27	0	41.06	-	-	-	-	157	333	V
EHT40 (242T / Index 62)	5670	5.725	41.84	Pk	34.7	-22.81	0	53.73	-	-	68.2	-14.47	270	102	H	
		5.726161	43.66	Pk	34.7	-22.81	0	55.55	-	-	68.2	-12.65	270	102	H	
		5.725	40.27	Pk	34.7	-22.81	0	52.16	-	-	68.2	-16.04	89	386	V	
		5.807655	42.69	Pk	35	-22.55	0	55.14	-	-	68.2	-13.06	89	386	V	
EHT40 (242T / Index 61)	5510	5	5.433844	47.74	RMS	34.4	-38.04	0	44.1	54	-9.9	-	-	38	166	H
			5.433844	47.74	RMS	34.4	-38.04	0	44.1	54	-9.9	-	-	38	166	H
			5.45091	59.52	Pk	34.4	-37.92	0	56	-	-	74	-18	38	166	H
			5.46	57.08	Pk	34.4	-37.94	0	53.54	-	-	68.2	-14.66	38	166	H
			5.46	46.09	RMS	34.4	-37.94	0	42.55	54	-11.45	-	-	38	166	H
			5.466732	61.06	Pk	34.4	-37.85	0	57.61	-	-	68.2	-10.59	38	166	H
			5.47	58.92	Pk	34.4	-37.77	0	55.55	-	-	68.2	-12.65	38	166	H
			5.47	46.73	RMS	34.4	-37.77	0	43.36	-	-	-	-	38	166	H
			5.422599	47.9	RMS	34.4	-38.04	0	44.26	54	-9.74	-	-	151	134	V
			5.422599	47.9	RMS	34.4	-38.04	0	44.26	54	-9.74	-	-	151	134	V
			5.444955	59.8	Pk	34.4	-37.96	0	56.24	-	-	74	-17.76	151	134	V
			5.46	57.81	Pk	34.4	-37.94	0	54.27	-	-	68.2	-13.93	151	134	V
			5.46	46.53	RMS	34.4	-37.94	0	42.99	54	-11.01	-	-	151	134	V
			5.469799	59.17	Pk	34.4	-37.78	0	55.79	-	-	68.2	-12.41	151	134	V
			5.47	57.72	Pk	34.4	-37.77	0	54.35	-	-	68.2	-13.85	151	134	V
			5.47	46.44	RMS	34.4	-37.77	0	43.07	-	-	-	-	151	134	V
EHT40 (242T / Index 62)	5670	5.725	57.43	Pk	34.9	-34.4	0	57.93	-	-	68.2	-10.27	110	107	H	
		5.788918	58.22	Pk	35	-34.4	0	58.82	-	-	68.2	-9.38	110	107	H	
		5.725	55.25	Pk	34.9	-34.4	0	55.75	-	-	68.2	-12.45	79	101	V	
		5.738612	58.98	Pk	34.9	-34.4	0	59.48	-	-	68.2	-8.72	79	101	V	
EHT40 ((106+26)T / Index 82)	5510	6	* 5.460	51.18	Pk	34.6	-30.4	0	55.38	-	-	68.2	-12.82	68	263	H
			* 5.455363	53.38	Pk	34.6	-30.4	0	57.58	-	-	74	-16.42	68	263	H
			* 5.460	39.98	RMS	34.6	-30.4	0	44.18	54	-9.82	-	-	68	263	H
			* 5.361851	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	68	263	H
			* 5.361851	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	68	263	H
			5.469814	58.86	Pk	34.6	-30.4	0	63.06	-	-	68.2	-5.14	68	263	H
			5.47	58.6	Pk	34.6	-30.4	0	62.8	-	-	68.2	-5.4	68	263	H
			5.47	40.51	RMS	34.6	-30.4	0	44.71	-	-	-	-	68	263	H
			* 5.460	50.67	Pk	34.6	-30.4	0	54.87	-	-	68.2	-13.33	36	114	V
			* 5.448387	52.92	Pk	34.6	-30.4	0	57.12	-	-	74	-16.88	36	114	V
			* 5.460	39.98	RMS	34.6	-30.4	0	44.18	54	-9.82	-	-	36	114	V
			* 5.449237	40.79	RMS	34.6	-30.4	0	44.99	54	-9.01	-	-	36	114	V
			* 5.449237	40.79	RMS	34.6	-30.4	0	44.99	54	-9.01	-	-	36	114	V
			5.469614	59.28	Pk	34.6	-30.4	0	63.48	-	-	68.2	-4.72	36	114	V
			5.47	57.56	Pk	34.6	-30.4	0	61.76	-	-	68.2	-6.44	36	114	V
			5.47	40.03	RMS	34.6	-30.4	0	44.23	-	-	-	-	36	114	V
EHT40 ((106+26)T / Index 85)	5670	5.725	50.48	Pk	34.6	-29.9	0	55.18	-	-	68.2	-13.02	84	253	H	
		5.774481	52.85	Pk	34.8	-29.8	0	57.85	-	-	68.2	-10.35	84	253	H	
		5.725	50.11	Pk	34.6	-29.9	0	54.81	-	-	68.2	-13.39	17	129	V	
		5.783452	52.21	Pk	34.8	-29.8	0	57.21	-	-	68.2	-10.99	17	129	V	
EHT40 ((106+26)T / Index 82)	5510	5	5.444866	47.66	RMS	34.4	-37.96	0	44.1	54	-9.9	-	-	38	165	H
			5.444866	47.66	RMS	34.4	-37.96	0	44.1	54	-9.9	-	-	38	165	H
			5.457488	59.86	Pk	34.4	-37.89	0	56.37	-	-	74	-17.63	38	165	H
			5.46	57.59	Pk	34.4	-37.94	0	54.05	-	-	68.2	-14.15	38	165	H
			5.46	46.46	RMS	34.4	-37.94	0	42.92	54	-11.08	-	-	38	165	H
			5.466932	61.34	Pk	34.4	-37.84	0	57.9	-	-	68.2	-10.3	38	165	H
			5.47	58.01	Pk	34.4	-37.77	0	54.64	-	-	68.2	-13.56	38	165	H
			5.47	47.06	RMS	34.4	-37.77	0	43.69	-	-	-	-	38	165	H
			5.398266	60.06	Pk	34.4	-38.09	0	56.37	-	-	74	-17.63	151	134	V
			5.445377	47.51	RMS	34.4	-37.96	0	43.95	54	-10.05	-	-	151	134	V
			5.445377	47.51	RMS	34.4	-37.96	0	43.95	54	-10.05	-	-	151	134	V
			5.46	57.44	Pk	34.4	-37.94	0	53.9	-	-	68.2	-14.3	151	134	V
			5.46	46.76	RMS	34.4	-37.94	0	43.22	54	-10.78	-	-	151	134	V
			5.460421	59.5	Pk	34.4	-37.94	0	55.96	-	-	68.2	-12.24	151	134	V
			5.47	58.03	Pk	34.4	-37.77	0	54.66	-	-	68.2	-13.54	151	134	V
			5.47	45.92	RMS	34.4	-37.77	0	42.55	-	-	-	-	151	134	V
EHT40 ((106+26)T / Index 85)	5670	5.725	55.9	Pk	34.9	-34.4	0	56.4	-	-	68.2	-11.8	108	107	H	
		5.744675	58.59	Pk	34.9	-34.5	0	58.99	-	-	68.2	-9.21	108	107	H	
		5.725	56.61	Pk	34.9	-34.4	0	57.11	-	-	68.2	-11.09	79	101	V	
		5.809171	58.67	Pk	35.1	-34.3	0	59.47	-	-	68.2	-8.73	79	101	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 65)	5530	6	5.455243	47.98	RMS	34.6	-38.78	0	43.8	54	-10.2	-	-	248	121	H
			5.455243	47.98	RMS	34.6	-38.78	0	43.8	54	-10.2	-	-	248	121	H
			5.458399	63.21	Pk	34.6	-38.73	0	59.08	-	-	74	-14.92	248	121	H
			5.46	60.86	Pk	34.6	-38.71	0	56.75	-	-	68.2	-11.45	248	121	H
			5.46	47.11	RMS	34.6	-38.71	0	43	54	-11	-	-	248	121	H
			5.469599	67.26	Pk	34.6	-38.76	0	63.1	-	-	68.2	-5.1	248	121	H
			5.47	66.15	Pk	34.6	-38.76	0	61.99	-	-	68.2	-6.21	248	121	H
			5.47	46.85	RMS	34.6	-38.76	0	42.69	-	-	-	-	248	121	H
			5.458488	63.79	Pk	34.6	-38.73	0	59.66	-	-	74	-14.34	195	393	V
			5.459932	47.83	RMS	34.6	-38.71	0	43.72	54	-10.28	-	-	195	393	V
			5.459932	47.83	RMS	34.6	-38.71	0	43.72	54	-10.28	-	-	195	393	V
			5.46	58.57	Pk	34.6	-38.71	0	54.46	-	-	68.2	-13.74	195	393	V
			5.46	46.68	RMS	34.6	-38.71	0	42.57	54	-11.43	-	-	195	393	V
			5.469777	67.79	Pk	34.6	-38.76	0	63.63	-	-	68.2	-4.57	195	393	V
			5.47	65.13	Pk	34.6	-38.76	0	60.97	-	-	68.2	-7.23	195	393	V
			5.47	46.99	RMS	34.6	-38.76	0	42.83	-	-	-	-	195	393	V
EHT80 (484T / Index 66)	5610	5.725	57.33	Pk	35.1	-38.19	0	54.24	-	-	68.2	-13.96	235	103	H	
		5.737108	59.43	Pk	35.1	-38.15	0	56.38	-	-	68.2	-11.82	235	103	H	
		5.725	57.3	Pk	35.1	-38.19	0	54.21	-	-	68.2	-13.99	175	113	V	
		5.810434	59.36	Pk	35.1	-37.94	0	56.52	-	-	68.2	-11.68	175	113	V	
EHT80 (484T / Index 65)	5530	5	5.457532	48.34	RMS	34.6	-38.77	0	44.17	54	-9.83	-	-	331	159	H
			5.457532	48.34	RMS	34.6	-38.77	0	44.17	54	-9.83	-	-	331	159	H
			5.458843	63.78	Pk	34.6	-38.69	0	59.69	-	-	74	-14.31	331	159	H
			5.46	61.71	Pk	34.6	-38.71	0	57.6	-	-	68.2	-10.6	331	159	H
			5.46	47.01	RMS	34.6	-38.71	0	42.9	54	-11.1	-	-	331	159	H
			5.469777	67.39	Pk	34.6	-38.76	0	63.23	-	-	68.2	-4.97	331	159	H
			5.47	66.07	Pk	34.6	-38.76	0	61.91	-	-	68.2	-6.29	331	159	H
			5.47	47.74	RMS	34.6	-38.76	0	43.58	-	-	-	-	331	159	H
			5.458221	47.95	RMS	34.6	-38.75	0	43.8	54	-10.2	-	-	314	113	V
			5.458221	47.95	RMS	34.6	-38.75	0	43.8	54	-10.2	-	-	314	113	V
			5.458443	62.58	Pk	34.6	-38.73	0	58.45	-	-	74	-15.55	314	113	V
			5.46	59.44	Pk	34.6	-38.71	0	55.33	-	-	68.2	-12.87	314	113	V
			5.46	47.56	RMS	34.6	-38.71	0	43.45	54	-10.55	-	-	314	113	V
			5.466754	65.45	Pk	34.6	-38.77	0	61.28	-	-	68.2	-6.92	314	113	V
			5.47	64.28	Pk	34.6	-38.76	0	60.12	-	-	68.2	-8.08	314	113	V
			5.47	47.42	RMS	34.6	-38.76	0	43.26	-	-	-	-	314	113	V
EHT80 (484T / Index 66)	5610	5.725	57.64	Pk	35.1	-38.19	0	54.55	-	-	68.2	-13.65	319	130	H	
		5.793491	59.26	Pk	35.1	-37.99	0	56.37	-	-	68.2	-11.83	319	130	H	
		5.725	57.1	Pk	35.1	-38.19	0	54.01	-	-	68.2	-14.19	220	124	V	
		5.757933	59.73	Pk	35.1	-38.02	0	56.81	-	-	68.2	-11.39	220	124	V	
EHT80 (52T / Index 37)	5530	6	* 5.46	56.52	Pk	34.3	-35.5	0	55.32	-	-	68.2	-12.88	345	243	H
			* 5.383355	58.48	Pk	34.4	-35.5	0	57.38	-	-	74	-16.62	345	243	H
			5.47	58.48	Pk	34.3	-35.6	0	57.18	-	-	68.2	-11.02	345	243	H
			5.469843	64.02	Pk	34.3	-35.6	0	62.72	-	-	68.2	-5.48	345	243	H
			* 5.46	45.63	RMS	34.3	-35.5	0.16	44.59	54	-9.41	-	-	345	243	H
			* 5.390711	46.31	RMS	34.4	-35.4	0.16	45.47	54	-8.53	-	-	345	243	H
			5.47	45.36	RMS	34.3	-35.6	0.16	44.22	-	-	-	-	345	243	H
			* 5.390711	46.31	RMS	34.4	-35.4	0.16	45.47	54	-8.53	-	-	345	243	H
			* 5.46	55.49	Pk	34.3	-35.5	0	54.29	-	-	68.2	-13.91	331	118	V
			* 5.450577	58.17	Pk	34.3	-35.4	0	57.07	-	-	74	-16.93	331	118	V
			5.47	62.46	Pk	34.3	-35.6	0	61.16	-	-	68.2	-7.04	331	118	V
			5.469821	63.22	Pk	34.3	-35.6	0	61.92	-	-	68.2	-6.28	331	118	V
			* 5.46	45.33	RMS	34.3	-35.5	0.16	44.29	54	-9.71	-	-	331	118	V
			* 5.390511	46.24	RMS	34.4	-35.4	0.16	45.4	54	-8.6	-	-	331	118	V
			5.47	45.44	RMS	34.3	-35.6	0.16	44.3	-	-	-	-	331	118	V
			* 5.390511	46.24	RMS	34.4	-35.4	0.16	45.4	54	-8.6	-	-	331	118	V
EHT80 (52T / Index 52)	5610	5.725	55.77	Pk	34.5	-35	0	55.27	-	-	68.2	-12.93	1	242	H	
		5.81712	57.6	Pk	34.7	-34.6	0	57.7	-	-	68.2	-10.5	1	242	H	
		5.725	55.53	Pk	34.5	-35	0	55.03	-	-	68.2	-13.17	302	101	V	
		5.743058	58.27	Pk	34.5	-34.8	0	57.97	-	-	68.2	-10.23	302	101	V	
EHT80 (52T / Index 37)	5530	5	* 5.460	55.49	Pk	34.6	-35.79	0	54.3	-	-	68.2	-13.9	258	162	H
			* 5.430688	58.24	Pk	34.6	-35.94	0	56.9	-	-	74	-17.1	258	162	H
			* 5.460	44.89	RMS	34.6	-35.79	0.16	43.86	54	-10.14	-	-	258	162	H
			* 5.448932	46.01	RMS	34.6	-35.91	0.16	44.86	54	-9.14	-	-	258	162	H
			* 5.448932	46.01	RMS	34.6	-35.91	0.16	44.86	54	-9.14	-	-	258	162	H
			5.462866	57.87	Pk	34.6	-35.7	0	56.77	-	-	68.2	-11.43	258	162	H
			5.47	56.36	Pk	34.6	-35.86	0	55.1	-	-	68.2	-13.1	258	162	H
			5.47	44.9	RMS	34.6	-35.86	0.16	43.8	-	-	-	-	258	162	H
			* 5.460	55.54	Pk	34.6	-35.79	0	54.35	-	-	68.2	-13.85	124	280	V
			* 5.44511	58.19	Pk	34.6	-35.98	0	56.81	-	-	74	-17.19	124	280	V
			* 5.460	44.7	RMS	34.6	-35.79	0.16	43.67	54	-10.33	-	-	124	280	V
			* 5.434021	46.26	RMS	34.6	-35.94	0.16	45.08	54	-8.92	-	-	124	280	V
			* 5.434021	46.26	RMS	34.6	-35.94	0.16	45.08	54	-8.92	-	-	124	280	V
			5.467177	57.36	Pk	34.6	-35.75	0	56.21	-	-	68.2	-11.99	124	280	V
			5.47	55.71	Pk	34.6	-35.86	0	54.45	-	-	68.2	-13.75	124	280	V
			5.47	45.05	RMS	34.6	-35.86	0.16	43.95	-	-	-	-	124	280	V
EHT80 (52T / Index 52)	5610	5.725	56.35	Pk	35.1	-38.19	0	53.26	-	-	68.2	-14.94	318	333	H	
		5.738553	59.12	Pk	35.1	-38.17	0	56.05	-	-	68.2	-12.15	318	333	H	
		5.725	57.23	Pk	35.1	-38.19	0	54.14	-	-	68.2	-14.06	255	362	V	
		5.794822	59.35	Pk	35.1	-38.03	0	56.42	-	-	68.2	-11.78	255	362	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/ Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (242T / Index 61)	5570 (Lower)	6	* 5.460	57.42	Pk	34.6	-35.79	0	56.23	-	-	68.2	-11.97	229	229	H
			* 5.437577	58.85	Pk	34.6	-35.94	0	57.51	-	-	74	-16.49	229	229	H
			* 5.460	45.67	RMS	34.6	-35.79	0.1	44.58	54	-9.42	-	-	229	229	H
			* 5.457443	46.23	RMS	34.6	-35.95	0.1	44.98	54	-9.02	-	-	229	229	H
			* 5.457443	46.23	RMS	34.6	-35.95	0.1	44.98	54	-9.02	-	-	229	229	H
			5.46951	63.92	Pk	34.6	-35.85	0	62.67	-	-	68.2	-5.53	229	229	H
			5.47	62.89	Pk	34.6	-35.86	0	61.63	-	-	68.2	-6.57	229	229	H
			5.47	45.98	RMS	34.6	-35.86	0.1	44.82	-	-	-	-	229	229	H
			* 5.460	55.52	Pk	34.6	-35.79	0	54.33	-	-	68.2	-13.87	195	148	V
			* 5.457666	58.46	Pk	34.6	-35.96	0	57.1	-	-	74	-16.9	195	148	V
			* 5.460	45.07	RMS	34.6	-35.79	0.1	43.98	54	-10.02	-	-	195	148	V
			* 5.419133	46.15	RMS	34.6	-35.93	0.1	44.92	54	-9.08	-	-	195	148	V
			* 5.419133	46.15	RMS	34.6	-35.93	0.1	44.92	54	-9.08	-	-	195	148	V
			5.469888	63.6	Pk	34.6	-35.86	0	62.34	-	-	68.2	-5.86	195	148	V
			5.47	60.9	Pk	34.6	-35.86	0	59.64	-	-	68.2	-8.56	195	148	V
			5.47	45.8	RMS	34.6	-35.86	0.1	44.64	-	-	-	-	195	148	V
			5.725	56.21	Pk	34.6	-37	0	53.81	-	-	68.2	-14.39	274	347	H
			5.819189	59.43	Pk	34.9	-36.9	0	57.43	-	-	68.2	-10.77	274	347	H
			5.725	56.79	Pk	34.6	-37	0	54.39	-	-	68.2	-13.81	209	122	V
			5.759293	59.33	Pk	34.7	-37.03	0	57	-	-	68.2	-11.2	209	122	V
EHT160 (242T / Index 564)	5570 (Upper)	5	* 5.460	55.45	Pk	34.6	-35.79	0	54.26	-	-	68.2	-13.94	82	168	H
			* 5.384822	58.67	Pk	34.6	-36.14	0	57.13	-	-	74	-16.87	82	168	H
			* 5.460	44.98	RMS	34.6	-35.79	0.1	43.89	54	-10.11	-	-	82	168	H
			* 5.459577	46.07	RMS	34.6	-35.86	0.1	44.91	54	-9.09	-	-	82	168	H
			* 5.459577	46.07	RMS	34.6	-35.86	0.1	44.91	54	-9.09	-	-	82	168	H
			5.463688	58.4	Pk	34.6	-35.69	0	57.31	-	-	68.2	-10.89	82	168	H
			5.47	57.18	Pk	34.6	-35.86	0	55.92	-	-	68.2	-12.28	82	168	H
			5.47	45.12	RMS	34.6	-35.86	0.1	43.96	-	-	-	-	82	168	H
			* 5.460	55.95	Pk	34.6	-35.79	0	54.76	-	-	68.2	-13.44	206	155	V
			* 5.381733	58.28	Pk	34.6	-36.05	0	56.83	-	-	74	-17.17	206	155	V
			* 5.460	44.88	RMS	34.6	-35.79	0.1	43.79	54	-10.21	-	-	206	155	V
			* 5.449555	46.08	RMS	34.6	-35.91	0.1	44.87	54	-9.13	-	-	206	155	V
			* 5.449555	46.08	RMS	34.6	-35.91	0.1	44.87	54	-9.13	-	-	206	155	V
			5.468665	57.28	Pk	34.6	-35.83	0	56.05	-	-	68.2	-12.15	206	155	V
			5.47	56.26	Pk	34.6	-35.86	0	55	-	-	68.2	-13.2	206	155	V
			5.47	45.35	RMS	34.6	-35.86	0.1	44.19	-	-	-	-	206	155	V
			5.725	55.88	Pk	34.9	-36.29	0	54.49	-	-	68.2	-13.71	84	185	H
			5.8246	58.18	Pk	35.1	-35.94	0	57.34	-	-	68.2	-10.86	84	185	H
			5.725	55.71	Pk	34.9	-36.29	0	54.32	-	-	68.2	-13.88	35	102	V
			5.764364	58.37	Pk	35	-36.14	0	57.23	-	-	68.2	-10.97	35	102	V
EHT160 (242T / Index 61)	5570 (Lower)	5	* 5.460	57.46	Pk	34.6	-35.79	0	56.27	-	-	68.2	-11.93	223	210	H
			* 5.42191	58.96	Pk	34.6	-35.83	0	57.73	-	-	74	-16.27	223	210	H
			* 5.460	45.94	RMS	34.6	-35.79	0.2	44.95	54	-9.05	-	-	223	210	H
			* 5.453888	46.68	RMS	34.6	-35.95	0.2	45.53	54	-8.47	-	-	223	210	H
			* 5.453888	46.68	RMS	34.6	-35.95	0.2	45.53	54	-8.47	-	-	223	210	H
			5.469888	63.97	Pk	34.6	-35.86	0	62.71	-	-	68.2	-5.49	223	210	H
			5.47	62.44	Pk	34.6	-35.86	0	61.18	-	-	68.2	-7.02	223	210	H
			5.47	45.7	RMS	34.6	-35.86	0.2	44.64	-	-	-	-	223	210	H
			* 5.460	57.22	Pk	34.6	-35.79	0	56.03	-	-	68.2	-12.17	192	108	V
			* 5.459821	58.66	Pk	34.6	-35.82	0	57.44	-	-	74	-16.56	192	108	V
			* 5.460	45.35	RMS	34.6	-35.79	0.2	44.36	54	-9.64	-	-	192	108	V
			* 5.451755	46.37	RMS	34.6	-35.95	0.2	45.22	54	-8.78	-	-	192	108	V
			* 5.451755	46.37	RMS	34.6	-35.95	0.2	45.22	54	-8.78	-	-	192	108	V
			5.469954	63.62	Pk	34.6	-35.86	0	62.36	-	-	68.2	-5.84	192	108	V
			5.47	62.15	Pk	34.6	-35.86	0	60.89	-	-	68.2	-7.31	192	108	V
			5.47	45.68	RMS	34.6	-35.86	0.2	44.62	-	-	-	-	192	108	V
			5.725	57.49	Pk	34.6	-37	0	55.09	-	-	68.2	-13.11	265	187	H
			5.803776	59.03	Pk	34.8	-36.9	0	56.93	-	-	68.2	-11.27	265	187	H
			5.725	58.79	Pk	34.6	-37	0	56.39	-	-	68.2	-11.81	209	143	V
			5.726058	59.88	Pk	34.6	-37	0	57.48	-	-	68.2	-10.72	209	143	V
EHT160 (52T / Index 37)	5570 (Lower)	5	5.415666	60.77	Pk	34.6	-37.92	0	57.45	-	-	74	-16.55	88	259	H
			5.457421	48.27	RMS	34.6	-37.74	0.2	45.33	54	-8.67	-	-	88	259	H
			5.457421	48.27	RMS	34.6	-37.74	0.2	45.33	54	-8.67	-	-	88	259	H
			5.46	57.43	Pk	34.6	-37.72	0	54.31	-	-	68.2	-13.89	88	259	H
			5.46	46.82	RMS	34.6	-37.72	0.2	43.9	54	-10.1	-	-	88	259	H
			5.469132	64.32	Pk	34.6	-37.81	0	61.11	-	-	68.2	-7.09	88	259	H
			5.47	61.86	Pk	34.6	-37.81	0	58.65	-	-	68.2	-9.55	88	259	H
			5.47	47.94	RMS	34.6	-37.81	0.2	44.93	-	-	-	-	88	259	H
			5.398488	47.61	RMS	34.7	-37.72	0.2	44.79	54	-9.21	-	-	53	102	V
			5.398488	47.61	RMS	34.7	-37.72	0.2	44.79	54	-9.21	-	-	53	102	V
			5.407111	60.38	Pk	34.6	-37.76	0	57.22	-	-	74	-16.78	53	102	V
			5.46	57.6	Pk	34.6	-37.72	0	54.48	-	-	68.2	-13.72	53	102	V
			5.46	46.82	RMS	34.6	-37.72	0.2	43.9	54	-10.1	-	-	53	102	V
			5.469732	59.96	Pk	34.6	-37.81	0	56.75	-	-	68.2	-11.45	53	102	V
			5.47	58.98	Pk	34.6	-37.81	0	55.77	-	-	68.2	-12.43	53	102	V
			5.47	46.77	RMS	34.6	-37.81	0.2	43.76	-	-	-	-	53	102	V
			5.725	56.44	Pk	34.9	-36.29	0	55.05	-	-	68.2	-13.15	88	163	H
			5.770088	58.43	Pk	35	-36.15	0	57.28	-	-	68.2	-10.92	88	163	H
			5.725	55.91	Pk	34.9	-36.29	0	54.52	-	-	68.2	-13.68	336	105	V
			5.74541	58.36	Pk	35	-36.23	0	57.13	-	-	68.2	-11.07	336	105	V
EHT160 (52T / Index 552)	5570 (Upper)	5	5.725	55.91	Pk	34.9	-36.29	0	54.52	-	-	68.2	-13.68	336	105	V
			5.74541	58.36	Pk	35	-36.23	0	57.13	-	-	68.2	-11.07	336	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

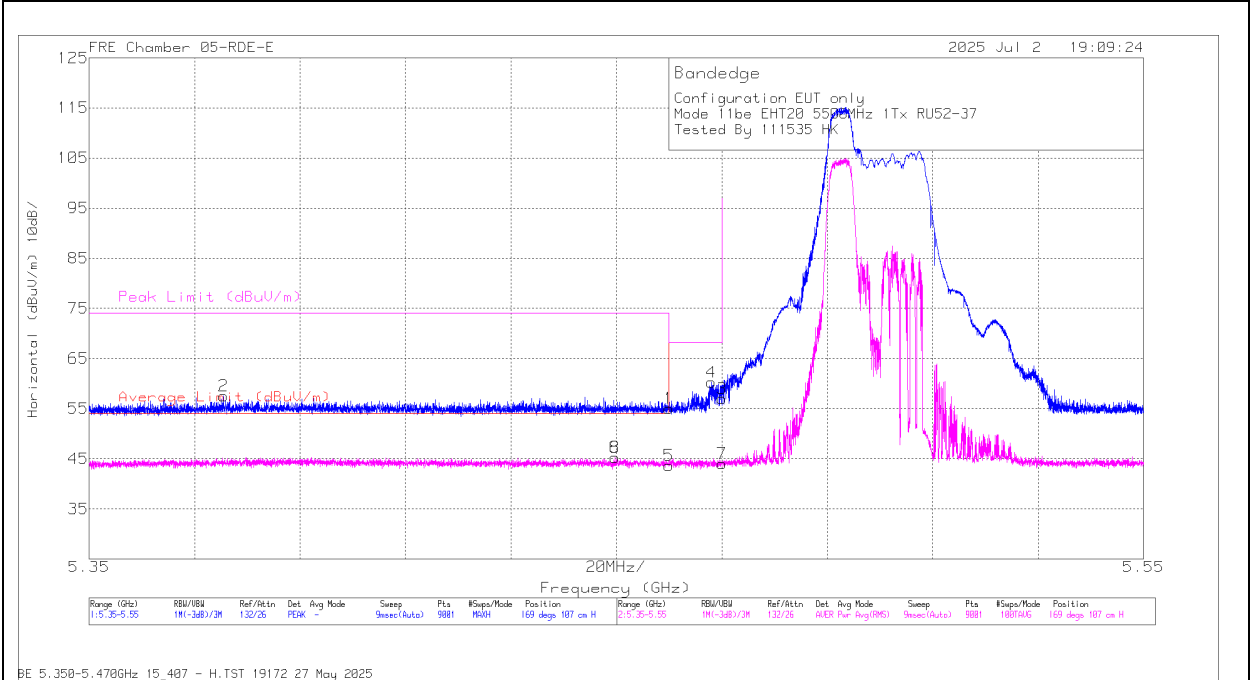


Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.46	56.19	Pk	34.3	0	-35.5	54.99	-	-	68.2	-13.21	169	107	H
* 5.375511	58.6	Pk	34.4	0	-35.5	57.5	-	-	74	-16.5	169	107	H
5.47	58.28	Pk	34.3	0	-35.6	56.98	-	-	68.2	-11.22	169	107	H
5.468021	61.54	Pk	34.3	0	-35.6	60.24	-	-	68.2	-7.96	169	107	H
* 5.46	44.88	RMS	34.3	0	-35.5	43.68	54	-10.32	-	-	169	107	H
* 5.449755	46.42	RMS	34.3	0	-35.42	45.3	54	-8.7	-	-	169	107	H
5.47	45.35	RMS	34.3	0	-35.6	44.05	-	-	-	-	169	107	H
* 5.449755	46.42	RMS	34.3	0	-35.42	45.3	54	-8.7	-	-	169	107	H

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

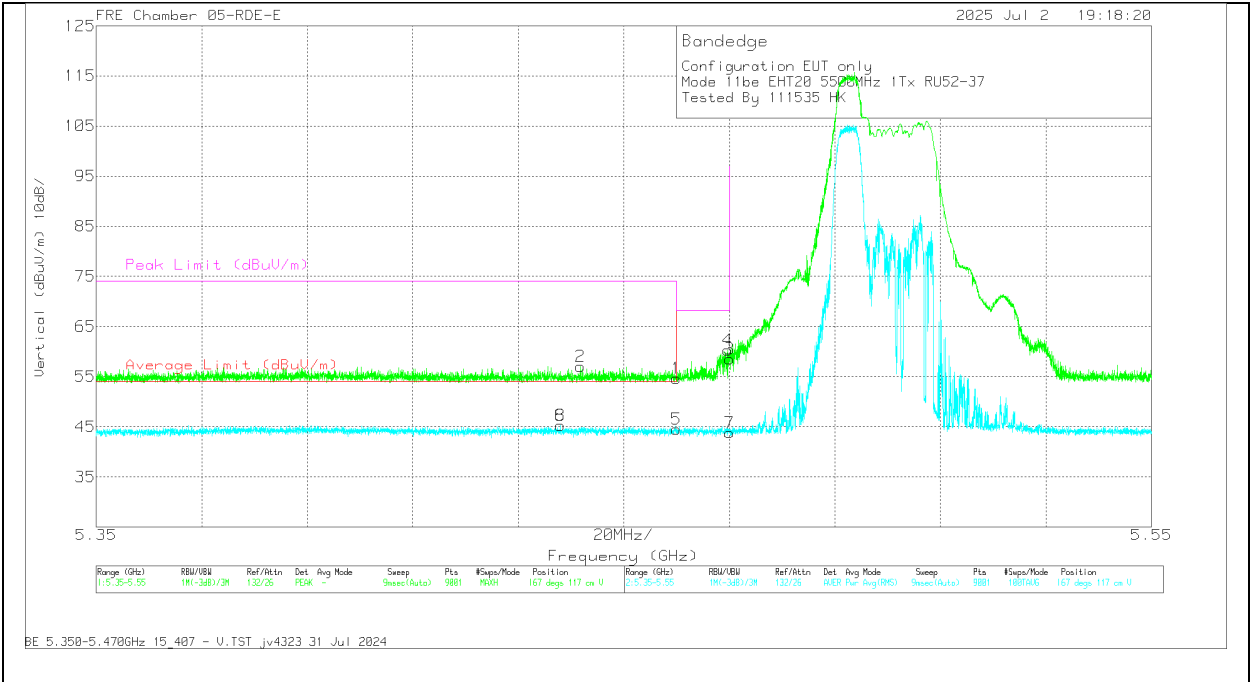


Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.46	55.86	Pk	34.3	0	-35.5	54.66	-	-	68.2	-13.54	167	117	V
* 5.441732	58.16	Pk	34.3	0	-35.43	57.03	-	-	74	-16.97	167	117	V
5.47	59.87	Pk	34.3	0	-35.6	58.57	-	-	68.2	-9.63	167	117	V
5.46971	61.56	Pk	34.3	0	-35.6	60.26	-	-	68.2	-7.94	167	117	V
* 5.46	45.68	RMS	34.3	0	-35.5	44.48	54	-9.52	-	-	167	117	V
* 5.437977	46.62	RMS	34.3	0	-35.6	45.32	54	-8.68	-	-	167	117	V
5.47	45.12	RMS	34.3	0	-35.6	43.82	-	-	-	-	167	117	V
* 5.437977	46.62	RMS	34.3	0	-35.6	45.32	54	-8.68	-	-	167	117	V

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

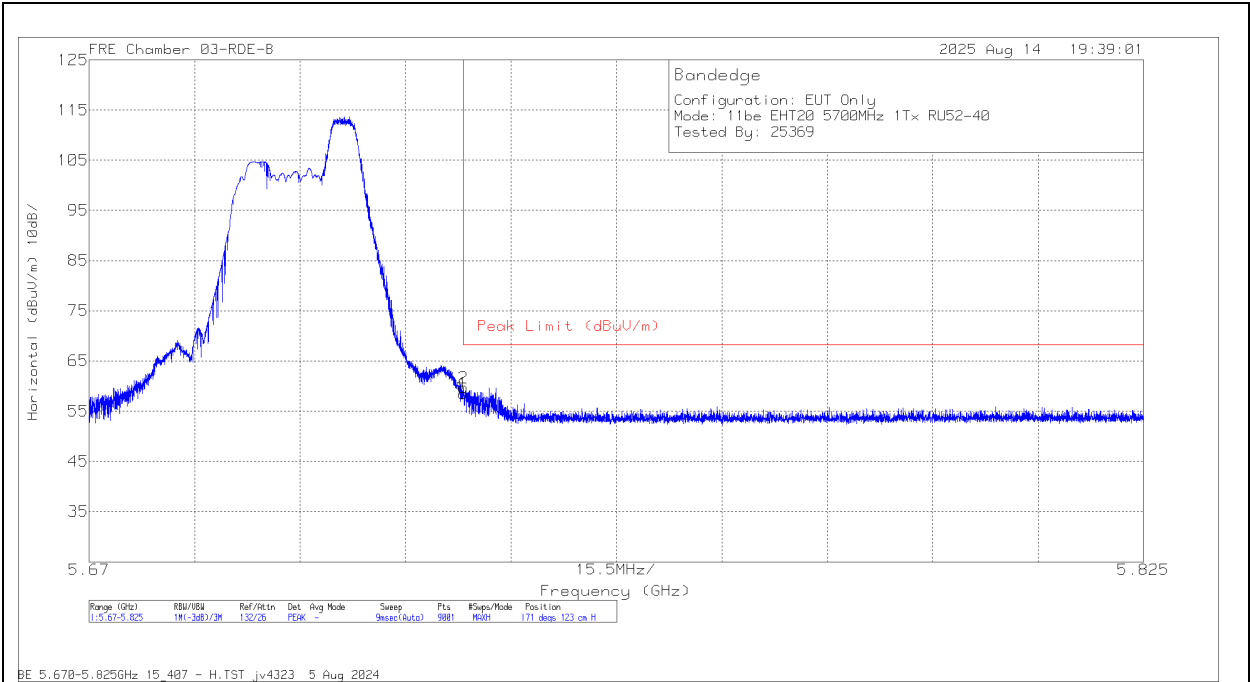


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223084 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	5.725	62.72	Pk	34.6	0	-38.8	58.52	68.2	-9.68	171	123	H
2	5.725024	63.89	Pk	34.6	0	-38.8	59.69	68.2	-8.51	171	123	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

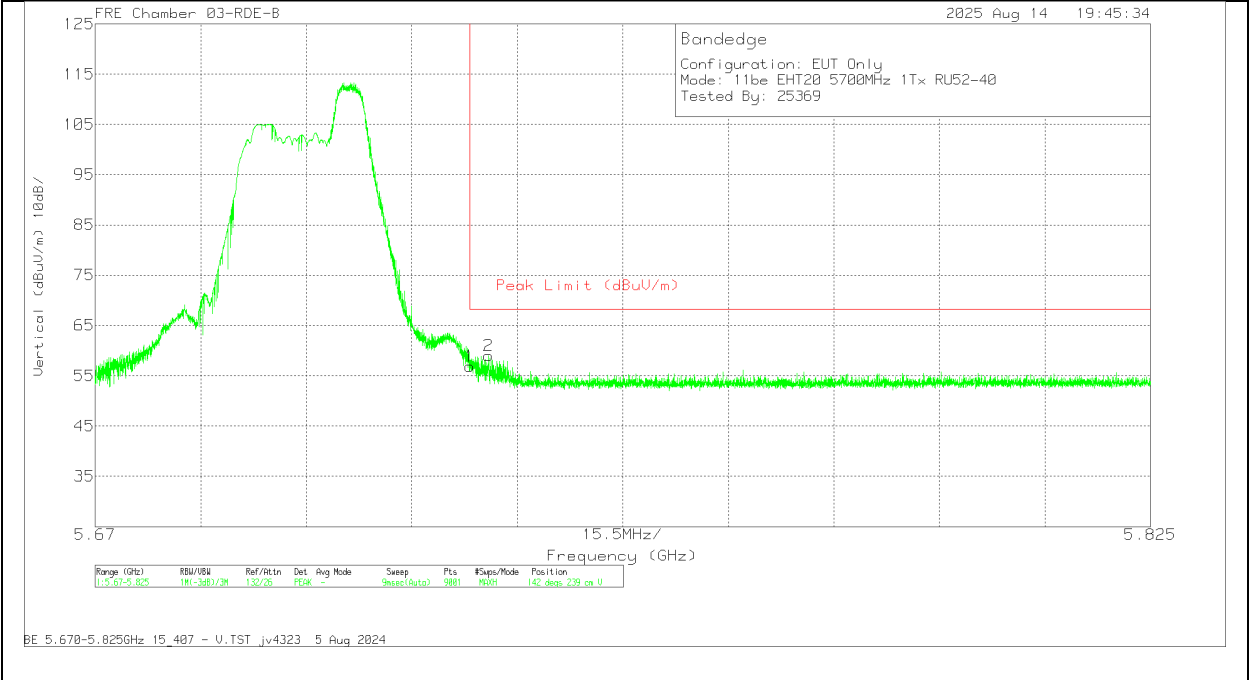

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223084 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.04	Pk	34.6	0	-38.8	56.84	68.2	-11.36	142	239	V
2	5.727814	63.24	Pk	34.6	0	-38.8	59.04	68.2	-9.16	142	239	V

Pk - Peak detector

1.1.21. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	5500	6 + 5	* 5.46	54.68	Pk	34.6	-34.8	0	54.48	-	-	68.2	-13.72	126	169	H	
			* 5.459088	58.73	Pk	34.6	-34.8	0	58.53	-	-	74	-15.47	126	169	H	
			* 5.46	38.27	RMS	34.6	-34.8	0	38.07	54	-15.93	-	-	126	169	H	
			* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H	
			* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H	
			5.468689	63.24	Pk	34.6	-34.8	0	63.04	-	-	68.2	-5.16	126	169	H	
			5.47	59.07	Pk	34.6	-34.8	0	58.87	-	-	68.2	-9.33	126	169	H	
			5.47	44.04	RMS	34.6	-34.8	0	43.84	-	-	-	-	126	169	H	
			* 5.46	55.07	Pk	34.6	-34.8	0	54.87	-	-	68.2	-13.33	49	139	V	
			* 5.459988	55.72	Pk	34.6	-34.8	0	55.52	-	-	74	-18.48	49	139	V	
			* 5.46	38.66	RMS	34.6	-34.8	0	38.46	54	-15.54	-	-	49	139	V	
			* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V	
			* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V	
			5.469939	62.85	Pk	34.6	-34.8	0	62.65	-	-	68.2	-5.55	49	139	V	
			5.47	59.09	Pk	34.6	-34.8	0	58.89	-	-	68.2	-9.31	49	139	V	
			5.47	45.1	RMS	34.6	-34.8	0	44.9	-	-	-	-	49	139	V	
	5700		5.725	60.43	Pk	34.8	-34.1	0	61.13	-	-	68.2	-7.07	133	159	H	
			5.725186	62.06	Pk	34.8	-34.1	0	62.76	-	-	68.2	-5.44	133	159	H	
			5.725	62.15	Pk	34.8	-34.1	0	62.85	-	-	68.2	-5.35	67	122	V	
			5.725418	62.05	Pk	34.8	-34.1	0	62.75	-	-	68.2	-5.45	67	122	V	
EHT40 (SU Mode)	5510	6 + 5	* 5.46	41.3	Pk	34.4	-16.6	0	59.1	-	-	68.2	-9.1	166	203	H	
			* 5.459913	43.45	Pk	34.4	-16.6	0	61.25	-	-	74	-12.75	166	203	H	
			* 5.46	28.14	RMS	34.4	-16.6	0	45.94	54	-8.06	-	-	166	203	H	
			* 5.410932	29.3	RMS	34.4	-16.6	0	47.1	54	-6.9	-	-	166	203	H	
			* 5.410932	29.3	RMS	34.4	-16.6	0	47.1	54	-6.9	-	-	166	203	H	
			5.469789	45.35	Pk	34.3	-16.5	0	63.15	-	-	68.2	-5.05	166	203	H	
			5.47	43.66	Pk	34.3	-16.5	0	61.46	-	-	68.2	-6.74	166	203	H	
			5.47	28.66	RMS	34.3	-16.5	0	46.46	-	-	-	-	166	203	H	
			* 5.46	38.72	Pk	34.4	-16.6	0	56.52	-	-	68.2	-11.68	110	268	V	
			* 5.458938	42.15	Pk	34.3	-16.6	0	59.85	-	-	74	-14.15	110	268	V	
			* 5.46	28.18	RMS	34.4	-16.6	0	45.98	54	-8.02	-	-	110	268	V	
			* 5.357851	29.61	RMS	34.3	-16.8	0	47.11	54	-6.89	-	-	110	268	V	
			* 5.357851	29.61	RMS	34.3	-16.8	0	47.11	54	-6.89	-	-	110	268	V	
			5.467839	42.77	Pk	34.3	-16.5	0	60.57	-	-	68.2	-7.63	110	268	V	
			5.47	40.2	Pk	34.3	-16.5	0	58	-	-	68.2	-10.2	110	268	V	
			5.47	28.16	RMS	34.3	-16.5	0	45.96	-	-	-	-	110	268	V	
	5670		5.725	43.99	Pk	34.5	-17.4	0	61.09	-	-	68.2	-7.11	168	260	H	
			5.729267	45.76	Pk	34.5	-17.3	0	62.96	-	-	68.2	-5.24	168	260	H	
			5.725	43.17	Pk	34.5	-17.4	0	60.27	-	-	68.2	-7.93	108	118	V	
			5.728821	44.61	Pk	34.5	-17.3	0	61.81	-	-	68.2	-6.39	108	118	V	
EHT80 (SU Mode)	5530	6 + 5	* 5.46	51.62	Pk	34.6	-34.8	0	51.42	-	-	68.2	-16.78	208	138	H	
			* 5.458363	61.38	Pk	34.6	-34.8	0	61.18	-	-	74	-12.82	208	138	H	
			* 5.46	38.61	RMS	34.6	-34.8	0	38.41	54	-15.59	-	-	208	138	H	
			* 5.453062	43.77	RMS	34.6	-34.8	0	43.57	54	-10.43	-	-	208	138	H	
			* 5.453062	43.77	RMS	34.6	-34.8	0	43.57	54	-10.43	-	-	208	138	H	
			5.467789	63.53	Pk	34.6	-34.8	0	63.33	-	-	68.2	-4.87	208	138	H	
			5.47	53.43	Pk	34.6	-34.8	0	53.23	-	-	68.2	-14.97	208	138	H	
			5.47	39.34	RMS	34.6	-34.8	0	39.14	-	-	-	-	208	138	H	
			* 5.46	58.26	Pk	34.6	-34.8	0	58.06	-	-	68.2	-10.14	170	105	V	
			* 5.456063	62.32	Pk	34.6	-34.8	0	62.12	-	-	74	-11.88	170	105	V	
			* 5.46	42.26	RMS	34.6	-34.8	0	42.06	54	-11.94	-	-	170	105	V	
			* 5.456638	44.77	RMS	34.6	-34.8	0	44.57	54	-9.43	-	-	170	105	V	
			* 5.456638	44.77	RMS	34.6	-34.8	0	44.57	54	-9.43	-	-	170	105	V	
			5.466089	63.28	Pk	34.6	-34.8	0	63.08	-	-	68.2	-5.12	170	105	V	
			5.47	59.94	Pk	34.6	-34.8	0	59.74	-	-	68.2	-8.46	170	105	V	
			5.47	43.33	RMS	34.6	-34.8	0	43.13	-	-	-	-	170	105	V	
	5610		5.725	61.47	Pk	34.6	-37	0	59.07	-	-	68.2	-9.13	246	126	H	
			5.725095	63.23	Pk	34.6	-37	0	60.83	-	-	68.2	-7.37	246	126	H	
			5.725	59.56	Pk	34.6	-37	0	57.16	-	-	68.2	-11.04	207	105	V	
			5.73164	65.17	Pk	34.6	-37	0	62.77	-	-	68.2	-5.43	207	105	V	
EHT160 (SU Mode)	5570 (Low BE)	6 + 5	* 5.46	62.69	Pk	34.6	-36.92	0	60.37	-	-	68.2	-7.83	156	134	H	
			* 5.459488	63.48	Pk	34.6	-36.93	0	61.15	-	-	74	-12.85	156	134	H	
			* 5.46	47.9	RMS	34.6	-36.92	0.14	45.72	54	-8.28	-	-	156	134	H	
			* 5.459332	48.36	RMS	34.6	-36.93	0.14	46.17	54	-7.83	-	-	156	134	H	
			* 5.459332	48.36	RMS	34.6	-36.93	0.14	46.17	54	-7.83	-	-	156	134	H	
			5.469954	64.96	Pk	34.6	-36.94	0	62.62	-	-	68.2	-5.58	156	134	H	
			5.47	60.93	Pk	34.6	-36.94	0	58.59	-	-	68.2	-9.61	156	134	H	
			5.47	47.42	RMS	34.6	-36.94	0.14	45.22	-	-	-	-	156	134	H	
			* 5.46	57.83	Pk	34.6	-36.92	0	55.51	-	-	68.2	-12.69	149	105	V	
			* 5.457132	66.15	Pk	34.6	-36.96	0	63.79	-	-	74	-10.21	149	105	V	
			* 5.46	47.47	RMS	34.6	-36.92	0.14	45.29	54	-8.71	-	-	149	105	V	
			* 5.447955	49.39	RMS	34.6	-36.95	0.14	47.18	54	-6.82	-	-	149	105	V	
			* 5.447955	49.39	RMS	34.6	-36.95	0.14	47.18	54	-6.82	-	-	149	105	V	
			5.467954	65.76	Pk	34.6	-36.97	0	63.39	-	-	68.2	-4.81	149	105	V	
			5.47	59.78	Pk	34.6	-36.94	0	57.44	-	-	68.2	-10.76	149	105	V	
			5.47	47.81	RMS	34.6	-36.94	0.14	45.61	-	-	-	-	149	105	V	
	5570 (High BE)		5.725	55.79	Pk	34.8	-34.1	0	56.49	-	-	68.2	-11.71	163	145	H	
			5.725028	56.46	Pk	34.8	-34.1	0	57.16	-	-	68.2	-11.04	163	145	H	
			5.725	55.41	Pk	34.8	-34.1	0	56.11	-	-	68.2	-12.09	176	105	V	
			5.727514	62.71	Pk	34.8	-34.1	0	63.41	-	-	68.2	-4.79	176	105	V	


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

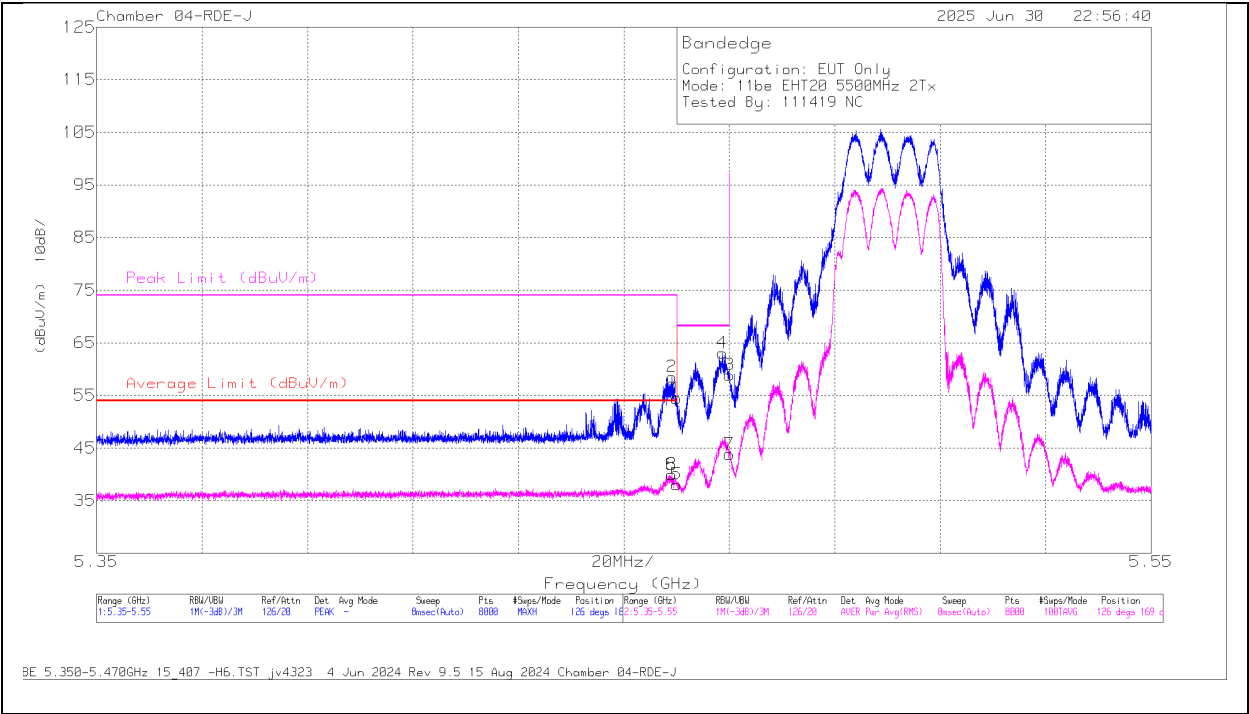


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	54.68	Pk	34.6	-34.8	0	54.48	-	-	68.2	-13.72	126	169	H
2	* 5.459088	58.73	Pk	34.6	-34.8	0	58.53	-	-	74	-15.47	126	169	H
5	* 5.46	38.27	RMS	34.6	-34.8	0	38.07	54	-15.93	-	-	126	169	H
6	* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H
8	* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H
4	5.468689	63.24	Pk	34.6	-34.8	0	63.04	-	-	68.2	-5.16	126	169	H
3	5.47	59.07	Pk	34.6	-34.8	0	58.87	-	-	68.2	-9.33	126	169	H
7	5.47	44.04	RMS	34.6	-34.8	0	43.84	-	-	-	-	126	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

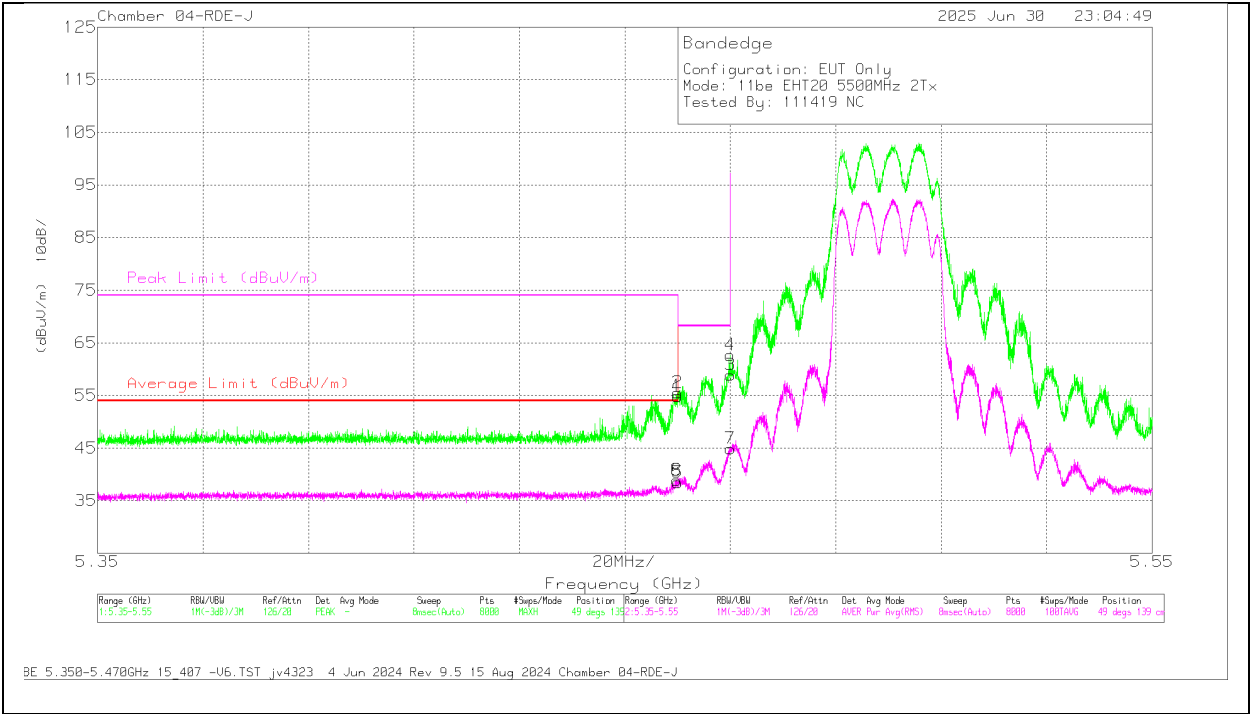


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.07	Pk	34.6	-34.8	0	54.87	-	-	68.2	-13.33	49	139	V
2	* 5.459988	55.72	Pk	34.6	-34.8	0	55.52	-	-	74	-18.48	49	139	V
5	* 5.46	38.66	RMS	34.6	-34.8	0	38.46	54	-15.54	-	-	49	139	V
6	* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V
8	* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V
4	5.469939	62.85	Pk	34.6	-34.8	0	62.65	-	-	68.2	-5.55	49	139	V
3	5.47	59.09	Pk	34.6	-34.8	0	58.89	-	-	68.2	-9.31	49	139	V
7	5.47	45.1	RMS	34.6	-34.8	0	44.9	-	-	-	-	49	139	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

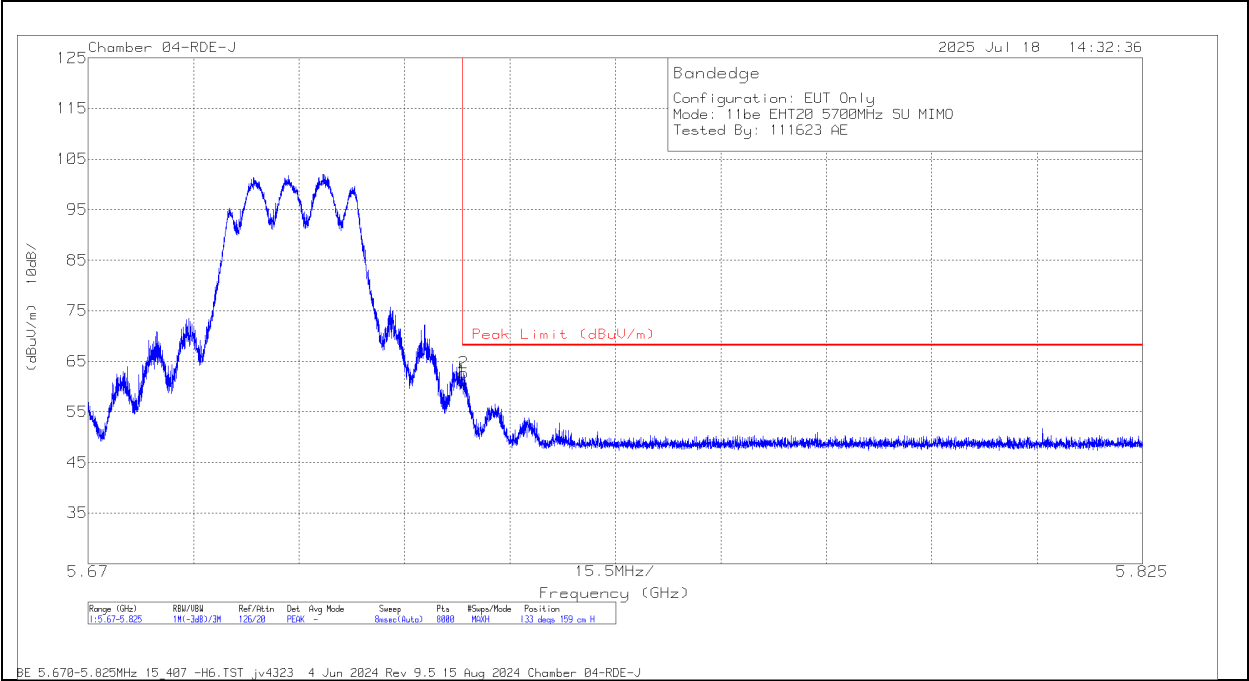


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.43	Pk	34.8	-34.1	0	61.13	68.2	-7.07	133	159	H
2	5.725186	62.06	Pk	34.8	-34.1	0	62.76	68.2	-5.44	133	159	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

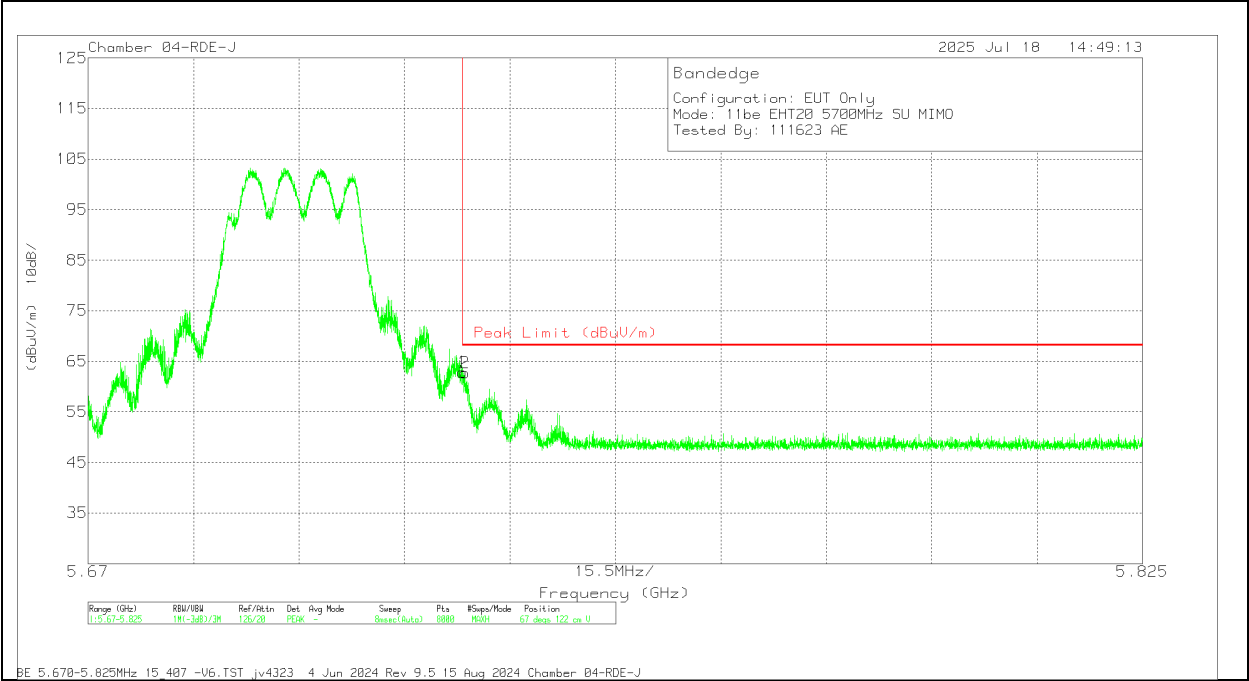

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.15	Pk	34.8	-34.1	0	62.85	68.2	-5.35	67	122	V
2	5.725418	62.05	Pk	34.8	-34.1	0	62.75	68.2	-5.45	67	122	V

Pk - Peak detector

1.1.22. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/CbI/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (52T / Index 37)	5500	6 + 5	5.362978	46.93	RMS	34.6	-36.54	0	44.99	54	-9.01	-	-	115	304	H	
			5.362978	46.93	RMS	34.6	-36.54	0	44.99	54	-9.01	-	-	115	304	H	
			5.433777	59.09	Pk	34.6	-36.46	0	57.23	-	-	74	-16.77	115	304	H	
			5.46	55.84	Pk	34.5	-36.55	0	53.79	-	-	-	68.2	-14.41	115	304	H
			5.46	45.39	RMS	34.5	-36.55	0	43.34	54	-10.66	-	-	-	115	304	H
			5.469532	62.72	Pk	34.5	-36.44	0	60.78	-	-	68.2	-7.42	115	304	H	
			5.47	62.04	Pk	34.5	-36.46	0	60.08	-	-	68.2	-8.12	115	304	H	
			5.47	45.05	RMS	34.5	-36.46	0	43.09	-	-	-	-	-	115	304	H
			5.358355	58.87	Pk	34.6	-36.57	0	56.9	-	-	74	-17.1	173	339	V	
			5.363422	47	RMS	34.6	-36.54	0	45.06	54	-8.94	-	-	173	339	V	
			5.363422	47	RMS	34.6	-36.54	0	45.06	54	-8.94	-	-	173	339	V	
			5.46	56.33	Pk	34.5	-36.55	0	54.28	-	-	68.2	-13.92	173	339	V	
			5.46	45.42	RMS	34.5	-36.55	0	43.37	54	-10.63	-	-	-	173	339	V
			5.46931	62.46	Pk	34.5	-36.43	0	60.53	-	-	68.2	-7.67	173	339	V	
			5.47	60.17	Pk	34.5	-36.46	0	58.21	-	-	68.2	-9.99	173	339	V	
			5.47	45.76	RMS	34.5	-36.46	0	43.8	-	-	-	-	-	173	339	V
EHT20 (52T / Index 40)	5700	5.725	61.11	Pk	34.8	-36.16	0	59.75	-	-	68.2	-8.45	9	196	H		
		5.727986	61.53	Pk	34.8	-36.29	0	60.04	-	-	68.2	-8.16	9	196	H		
		5.725	61.39	Pk	34.8	-36.16	0	60.03	-	-	68.2	-8.17	340	102	V		
		5.725042	62	Pk	34.8	-36.16	0	60.64	-	-	68.2	-7.56	340	102	V		
EHT40 (242T / Index 61)	5510	6 + 5	* 5.460	43.26	Pk	34.6	-23.31	0	54.55	-	-	68.2	-13.65	39	206	H	
			* 5.458332	45.79	Pk	34.6	-23.4	0	56.99	-	-	74	-17.01	39	206	H	
			* 5.460	30.03	RMS	34.6	-23.31	0	41.32	54	-12.68	-	-	39	206	H	
			* 5.456088	30.57	RMS	34.6	-23.35	0	41.82	54	-12.18	-	-	39	206	H	
			* 5.456088	30.57	RMS	34.6	-23.35	0	41.82	54	-12.18	-	-	39	206	H	
			5.46691	51.65	Pk	34.6	-23.18	0	63.07	-	-	68.2	-5.13	39	206	H	
			5.47	49.16	Pk	34.6	-23.27	0	60.49	-	-	68.2	-7.71	39	206	H	
			5.47	31.37	RMS	34.6	-23.27	0	42.7	-	-	-	-	39	206	H	
			* 5.460	40.16	Pk	34.6	-23.31	0	51.45	-	-	68.2	-16.75	33	134	V	
			* 5.459866	43.63	Pk	34.6	-23.33	0	54.9	-	-	74	-19.1	33	134	V	
			* 5.460	30.08	RMS	34.6	-23.31	0	41.37	54	-12.63	-	-	33	134	V	
			* 5.353178	30.2	RMS	34.6	-23.09	0	41.71	54	-12.29	-	-	33	134	V	
			* 5.353178	30.2	RMS	34.6	-23.09	0	41.71	54	-12.29	-	-	33	134	V	
			5.469977	51.17	Pk	34.6	-23.27	0	62.5	-	-	68.2	-5.7	33	134	V	
			5.47	47.13	Pk	34.6	-23.27	0	58.46	-	-	68.2	-9.74	33	134	V	
			5.47	31.35	RMS	34.6	-23.27	0	42.68	-	-	-	-	33	134	V	
EHT40 (242T / Index 62)	5670	5.725	40.56	Pk	34.7	-22.81	0	52.45	-	-	68.2	-15.75	51	202	H		
		5.766409	43.37	Pk	34.8	-22.76	0	55.41	-	-	68.2	-12.79	51	202	H		
		5.725	41.27	Pk	34.7	-22.81	0	53.16	-	-	68.2	-15.04	356	173	V		
		5.743848	42.77	Pk	34.8	-22.55	0	55.02	-	-	68.2	-13.18	356	173	V		
EHT40 ((106+26)T / Index 82)	5510	6 + 5	* 5.460	50.67	Pk	34.6	-30.4	0	54.87	-	-	68.2	-13.33	59	240	H	
			* 5.441411	53.11	Pk	34.6	-30.4	0	57.31	-	-	74	-16.69	59	240	H	
			* 5.460	39.96	RMS	34.6	-30.4	0	44.16	54	-9.84	-	-	59	240	H	
			* 5.378228	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	59	240	H	
			* 5.378228	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	59	240	H	
			5.469589	59.19	Pk	34.6	-30.4	0	63.39	-	-	68.2	-4.81	59	240	H	
			5.47	56.01	Pk	34.6	-30.4	0	60.21	-	-	68.2	-7.99	59	240	H	
			5.47	40.28	RMS	34.6	-30.4	0	44.48	-	-	-	-	59	240	H	
			* 5.460	50.89	Pk	34.6	-30.4	0	55.09	-	-	68.2	-13.11	48	118	V	
			* 5.457663	53.13	Pk	34.6	-30.4	0	57.33	-	-	74	-16.67	48	118	V	
			* 5.460	39.66	RMS	34.6	-30.4	0	43.86	54	-10.14	-	-	48	118	V	
			* 5.439736	40.85	RMS	34.6	-30.4	0	45.05	54	-8.95	-	-	48	118	V	
			* 5.439736	40.85	RMS	34.6	-30.4	0	45.05	54	-8.95	-	-	48	118	V	
			5.469914	57.05	Pk	34.6	-30.4	0	61.25	-	-	68.2	-6.95	48	118	V	
			5.47	55.91	Pk	34.6	-30.4	0	60.11	-	-	68.2	-8.09	48	118	V	
			5.47	40.27	RMS	34.6	-30.4	0	44.47	-	-	-	-	48	118	V	
EHT40 ((106+26)T / Index 85)	5670	5.725	50.4	Pk	34.6	-29.9	0	55.1	-	-	68.2	-13.1	70	260	H		
		5.782639	52.82	Pk	34.8	-29.8	0	57.82	-	-	68.2	-10.38	70	260	H		
		5.725	50.35	Pk	34.6	-29.9	0	55.05	-	-	68.2	-13.15	15	171	V		
		5.803973	52.51	Pk	34.9	-29.8	0	57.61	-	-	68.2	-10.59	15	171	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 65)	5530	6 + 5	5.45711	63.51	Pk	34.6	-38.78	0	59.33	-	-	74	-14.67	251	135	H
			5.457266	47.94	RMS	34.6	-38.78	0	43.76	54	-10.24	-	-	251	135	H
			5.457266	47.94	RMS	34.6	-38.78	0	43.76	54	-10.24	-	-	251	135	H
			5.46	61.59	Pk	34.6	-38.71	0	57.48	-	-	68.2	-10.72	251	135	H
			5.46	47.03	RMS	34.6	-38.71	0	42.92	54	-11.08	-	-	251	135	H
			5.466866	67.34	Pk	34.6	-38.76	0	63.18	-	-	68.2	-5.02	251	135	H
			5.47	65.35	Pk	34.6	-38.76	0	61.19	-	-	68.2	-7.01	251	135	H
			5.47	47.38	RMS	34.6	-38.76	0	43.22	-	-	-	-	251	135	H
			5.456021	63.5	Pk	34.6	-38.79	0	59.31	-	-	74	-14.69	196	123	V
			5.456688	48.07	RMS	34.6	-38.78	0	43.89	54	-10.11	-	-	196	123	V
			5.456688	48.07	RMS	34.6	-38.78	0	43.89	54	-10.11	-	-	196	123	V
			5.46	61.35	Pk	34.6	-38.71	0	57.24	-	-	68.2	-10.96	196	123	V
			5.46	47.58	RMS	34.6	-38.71	0	43.47	54	-10.53	-	-	196	123	V
			5.466443	67.21	Pk	34.6	-38.79	0	63.02	-	-	68.2	-5.18	196	123	V
			5.47	66.89	Pk	34.6	-38.76	0	62.73	-	-	68.2	-5.47	196	123	V
5.47	48.6	RMS	34.6	-38.76	0	44.44	-	-	-	-	196	123	V			
EHT80 (484T / Index 66)	5610	5.725	57.03	Pk	35.1	-38.19	0	53.94	-	-	68.2	-14.26	270	205	H	
		5.754958	59.39	Pk	35.1	-38.07	0	56.42	-	-	68.2	-11.78	270	205	H	
		5.725	58.37	Pk	35.1	-38.19	0	55.28	-	-	68.2	-12.92	202	106	V	
		5.728891	60	Pk	35.1	-38.22	0	56.88	-	-	68.2	-11.32	202	106	V	
EHT80 (52T / Index 37)	5530	6 + 5	* 5.460	57.1	Pk	34.6	-35.79	0	55.91	-	-	68.2	-12.29	216	111	H
			* 5.450021	58.3	Pk	34.6	-35.91	0	56.99	-	-	74	-17.01	216	111	H
			* 5.460	45.53	RMS	34.6	-35.79	0.16	44.5	54	-9.5	-	-	216	111	H
			* 5.457021	46.4	RMS	34.6	-35.93	0.16	45.23	54	-8.77	-	-	216	111	H
			* 5.457021	46.4	RMS	34.6	-35.93	0.16	45.23	54	-8.77	-	-	216	111	H
			5.466932	63.7	Pk	34.6	-35.74	0	62.56	-	-	68.2	-5.64	216	111	H
			5.47	62.14	Pk	34.6	-35.86	0	60.88	-	-	68.2	-7.32	216	111	H
			5.47	45.69	RMS	34.6	-35.86	0.16	44.59	-	-	-	-	216	111	H
			* 5.460	55.87	Pk	34.6	-35.79	0	54.68	-	-	68.2	-13.52	203	139	V
			* 5.359689	58.79	Pk	34.6	-36.18	0	57.21	-	-	74	-16.79	203	139	V
			* 5.460	45.45	RMS	34.6	-35.79	0.16	44.42	54	-9.58	-	-	203	139	V
			* 5.436466	46.1	RMS	34.6	-35.92	0.16	44.94	54	-9.06	-	-	203	139	V
			* 5.436466	46.1	RMS	34.6	-35.92	0.16	44.94	54	-9.06	-	-	203	139	V
			5.467265	62.29	Pk	34.6	-35.76	0	61.13	-	-	68.2	-7.07	203	139	V
			5.47	60.42	Pk	34.6	-35.86	0	59.16	-	-	68.2	-9.04	203	139	V
			5.47	45.25	RMS	34.6	-35.86	0.16	44.15	-	-	-	-	203	139	V
EHT80 (52T / Index 52)	5610	5.725	56.47	Pk	34.6	-37	0	54.07	-	-	68.2	-14.13	237	109	H	
		5.727928	59.75	Pk	34.6	-37	0	57.35	-	-	68.2	-10.85	237	109	H	
		5.725	56.9	Pk	34.6	-37	0	54.5	-	-	68.2	-13.7	212	128	V	
		5.820634	59.04	Pk	34.9	-36.9	0	57.04	-	-	68.2	-11.16	212	128	V	
EHT160 (242T / Index 61)	5570 (Lower)	6 + 5	5.3556	46.87	RMS	34.6	-36.58	0.1	44.99	54	-9.01	-	-	199	267	H
			5.3556	46.87	RMS	34.6	-36.58	0.1	44.99	54	-9.01	-	-	199	267	H
			5.403888	58.88	Pk	34.6	-36.55	0	56.93	-	-	74	-17.07	199	267	H
			5.46	55.76	Pk	34.5	-36.55	0	53.71	-	-	68.2	-14.49	199	267	H
			5.46	45.81	RMS	34.5	-36.55	0.1	43.86	54	-10.14	-	-	199	267	H
			5.469488	65.35	Pk	34.5	-36.44	0	63.41	-	-	68.2	-4.79	199	267	H
			5.47	63.92	Pk	34.5	-36.46	0	61.96	-	-	68.2	-6.24	199	267	H
			5.47	45.74	RMS	34.5	-36.46	0.1	43.88	-	-	-	-	199	267	H
			5.355133	47	RMS	34.6	-36.59	0.1	45.11	54	-8.89	-	-	184	373	V
			5.355133	47	RMS	34.6	-36.59	0.1	45.11	54	-8.89	-	-	184	373	V
			5.448488	58.97	Pk	34.5	-36.52	0	56.95	-	-	74	-17.05	184	373	V
			5.46	55.73	Pk	34.5	-36.55	0	53.68	-	-	68.2	-14.52	184	373	V
			5.46	44.96	RMS	34.5	-36.55	0.1	43.01	54	-10.99	-	-	184	373	V
			5.469288	61.77	Pk	34.5	-36.43	0	59.84	-	-	68.2	-8.36	184	373	V
			5.47	61.33	Pk	34.5	-36.46	0	59.37	-	-	68.2	-8.83	184	373	V
5.47	45.44	RMS	34.5	-36.46	0.1	43.58	-	-	-	-	184	373	V			
EHT160 (242T / Index 564)	5570 (Upper)	5.725	55.36	Pk	34.5	-35	0	54.86	-	-	68.2	-13.34	5	144	H	
		5.745863	57.98	Pk	34.5	-34.9	0	57.58	-	-	68.2	-10.62	5	144	H	
		5.725	54.8	Pk	34.5	-35	0	54.3	-	-	68.2	-13.9	330	116	V	
		5.810746	57.23	Pk	34.7	-34.6	0	57.33	-	-	68.2	-10.87	330	116	V	
EHT160 (52T / Index 37)	5570 (Lower)	6 + 5	5.39	60.79	Pk	34.4	-38.1	0	57.09	-	-	74	-16.91	357	111	H
			5.417688	48.17	RMS	34.4	-37.95	0.2	44.82	54	-9.18	-	-	357	111	H
			5.417688	48.17	RMS	34.4	-37.95	0.2	44.82	54	-9.18	-	-	357	111	H
			5.46	58.16	Pk	34.4	-37.94	0	54.62	-	-	68.2	-13.58	357	111	H
			5.46	47.48	RMS	34.4	-37.94	0.2	44.14	54	-9.86	-	-	357	111	H
			5.469577	66.19	Pk	34.4	-37.79	0	62.8	-	-	68.2	-5.4	357	111	H
			5.47	64	Pk	34.4	-37.77	0	60.63	-	-	68.2	-7.57	357	111	H
			5.47	47.62	RMS	34.4	-37.77	0.2	44.45	-	-	-	-	357	111	H
			5.404555	48.03	RMS	34.4	-38.03	0.2	44.6	54	-9.4	-	-	311	336	V
			5.404555	48.03	RMS	34.4	-38.03	0.2	44.6	54	-9.4	-	-	311	336	V
			5.451243	60.15	Pk	34.4	-37.93	0	56.62	-	-	74	-17.38	311	336	V
			5.46	58.15	Pk	34.4	-37.94	0	54.61	-	-	68.2	-13.59	311	336	V
			5.46	47.27	RMS	34.4	-37.94	0.2	43.93	54	-10.07	-	-	311	336	V
			5.46971	64.45	Pk	34.4	-37.78	0	61.07	-	-	68.2	-7.13	311	336	V
			5.47	63.95	Pk	34.4	-37.77	0	60.58	-	-	68.2	-7.62	311	336	V
5.47	46.32	RMS	34.4	-37.77	0.2	43.15	-	-	-	-	311	336	V			
EHT160 (52T / Index 552)	5570 (Upper)	5.725	55.09	Pk	34.5	-35	0	54.59	-	-	68.2	-13.61	44	302	H	
		5.747195	57.66	Pk	34.5	-34.8	0	57.36	-	-	68.2	-10.84	44	302	H	
		5.725	56.22	Pk	34.5	-35	0	55.72	-	-	68.2	-12.48	328	104	V	
		5.794794	57.3	Pk	34.6	-34.72	0	57.18	-	-	68.2	-11.02	328	104	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection


2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 52

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

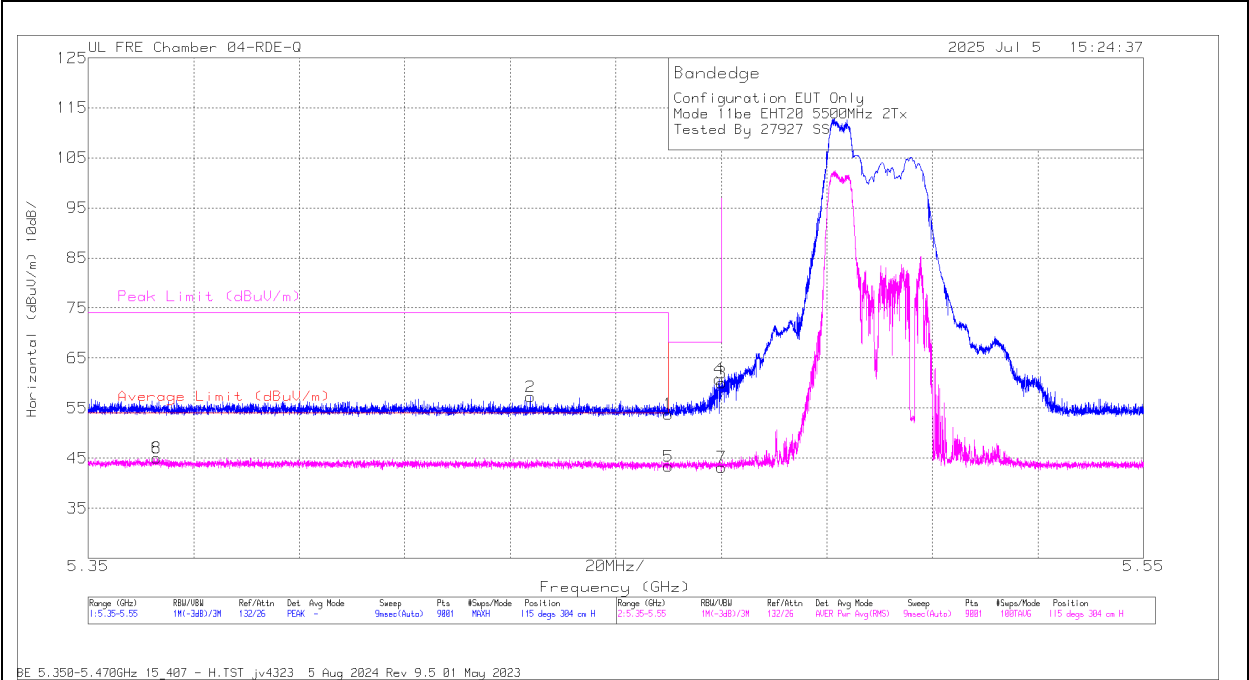

Pk - Peak detector
RMS - RMS detection

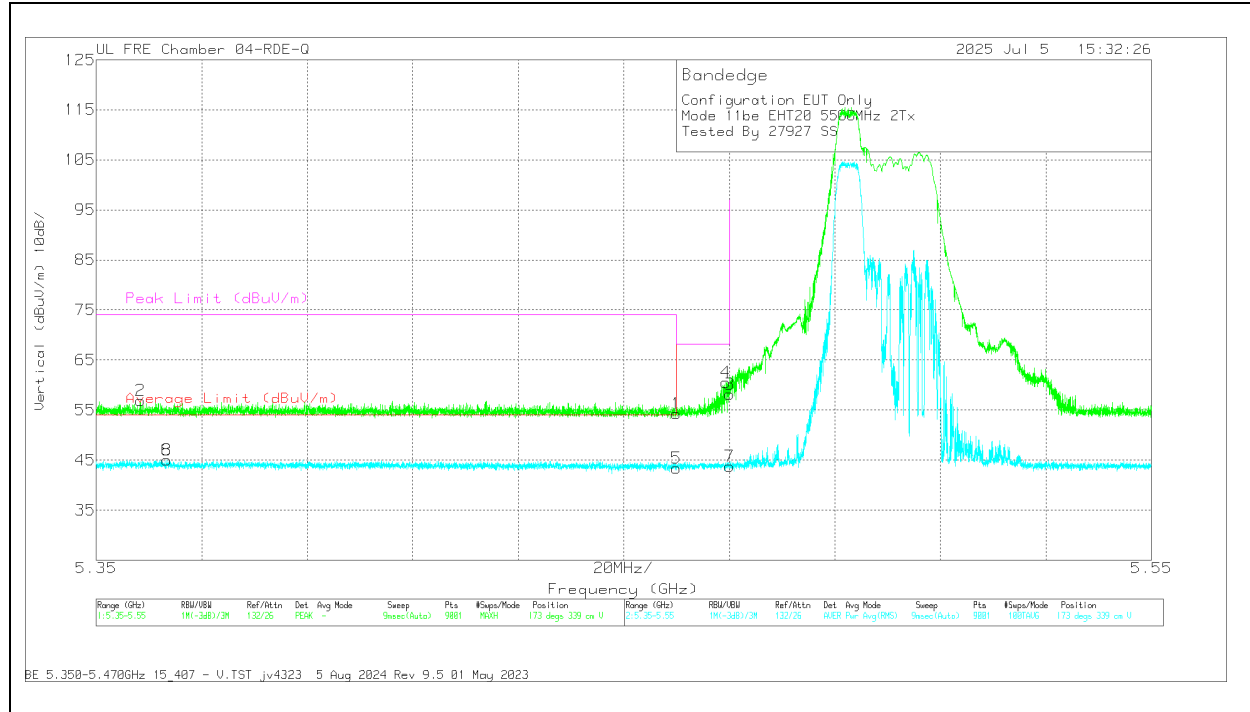2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 52**BANDEDGE (LOW CHANNEL / 5500MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.358355	58.87	Pk	34.6	0	-36.57	56.9	-	-	74	-17.1	173	339	V
6	5.363422	47	RMS	34.6	0	-36.54	45.06	54	-8.94	-	-	173	339	V
8	5.363422	47	RMS	34.6	0	-36.54	45.06	54	-8.94	-	-	173	339	V
1	5.46	56.33	Pk	34.5	0	-36.55	54.28	-	-	68.2	-13.92	173	339	V
5	5.46	45.42	RMS	34.5	0	-36.55	43.37	54	-10.63	-	-	173	339	V
4	5.46931	62.46	Pk	34.5	0	-36.43	60.53	-	-	68.2	-7.67	173	339	V
3	5.47	60.17	Pk	34.5	0	-36.46	58.21	-	-	68.2	-9.99	173	339	V
7	5.47	45.76	RMS	34.5	0	-36.46	43.8	-	-	-	-	173	339	V


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU, 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

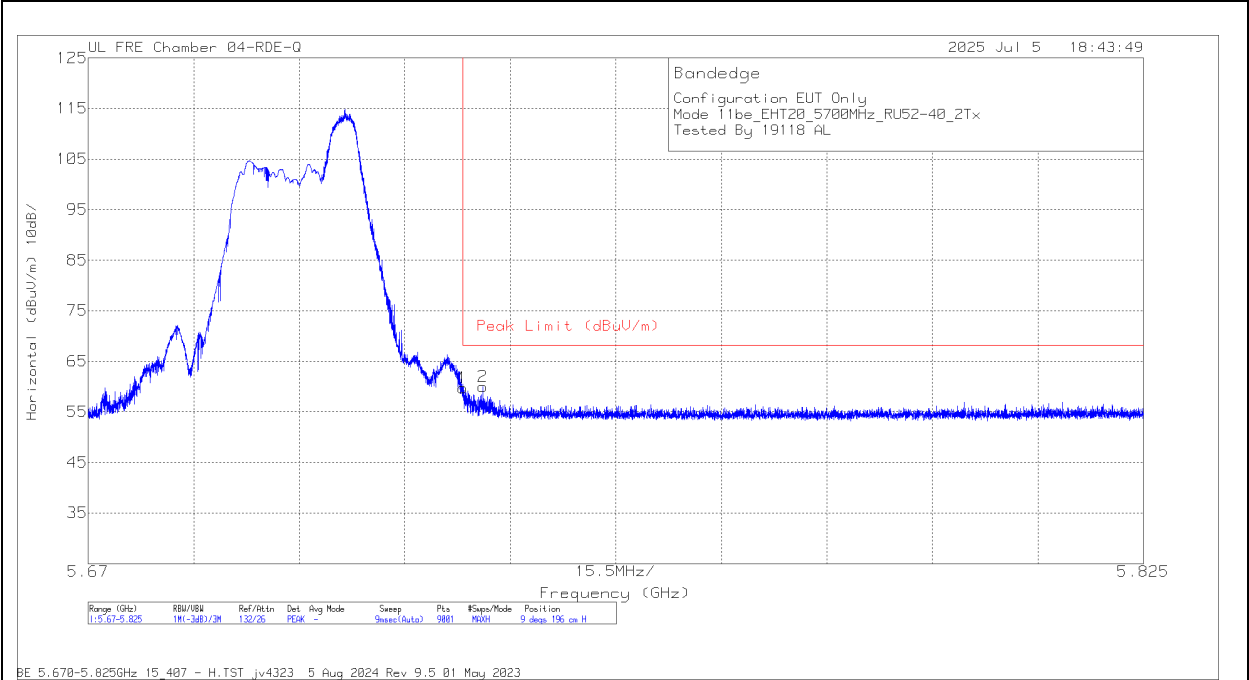


Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU, 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

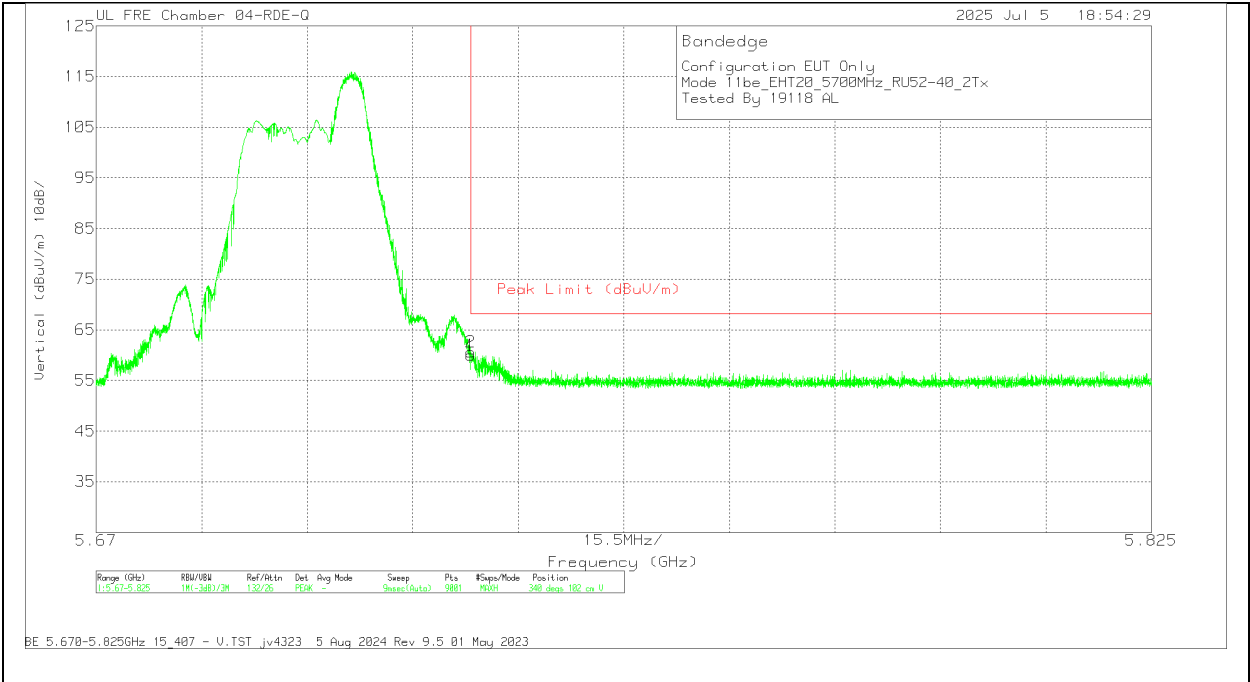

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.39	Pk	34.8	0	-36.16	60.03	68.2	-8.17	340	102	V
2	5.725042	62	Pk	34.8	0	-36.16	60.64	68.2	-7.56	340	102	V

Pk - Peak detector

1.1.23. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5500	6 + 5	* 11.601782	40.57	ADR	38.3	-40.4	0	38.47	54	-15.53	-	-	360	200	V
			* 11.603055	40.6	ADR	38.3	-40.3	0	38.6	54	-15.4	-	-	360	101	H
			* 11.606698	52.13	PK-U	38.3	-40.4	0	50.03	-	-	74	-23.97	360	200	V
			* 11.618135	52.25	PK-U	38.3	-40.4	0	50.15	-	-	74	-23.85	360	101	H
			* 1.270622	49.21	ADR	29.1	-48.8	0	29.51	54	-24.49	-	-	360	101	V
			* 1.271049	49.2	ADR	29.1	-48.8	0	29.5	54	-24.5	-	-	360	101	H
			* 1.272149	60.66	PK-U	29.1	-49	0	40.76	-	-	74	-33.24	360	101	V
			* 1.273683	60.59	PK-U	29.2	-48.7	0	41.09	-	-	74	-32.91	360	101	H
			* 3.748861	56.19	PK-U	33.3	-45.8	0	43.69	-	-	74	-30.31	360	101	V
			* 3.760042	56.8	PK-U	33.4	-45.7	0	44.5	-	-	74	-29.5	360	101	H
			* 3.763408	44.76	ADR	33.4	-45.8	0	32.36	54	-21.64	-	-	360	101	H
			* 3.765188	44.71	ADR	33.4	-45.6	0	32.51	54	-21.49	-	-	360	101	V
			* 1.269034	60.2	PK-U	29.1	-48.8	0	40.5	-	-	74	-33.5	320	327	H
			* 1.26937	60.29	PK-U	29.1	-48.8	0	40.59	-	-	74	-33.41	212	132	V
			* 1.269928	49.26	ADR	29.1	-48.8	0	29.56	54	-24.44	-	-	320	327	H
	5580	6 + 5	* 1.271917	49.38	ADR	29.1	-49	0	29.48	54	-24.52	-	-	212	132	V
			* 3.814658	56.42	PK-U	33.5	-45.7	0	44.22	-	-	74	-29.78	255	116	V
			* 3.814698	44.81	ADR	33.5	-45.7	0	32.61	54	-21.39	-	-	255	116	V
			* 3.820184	44.68	ADR	33.5	-45.5	0	32.68	54	-21.32	-	-	171	130	H
			* 3.828097	56.1	PK-U	33.5	-45.4	0	44.2	-	-	74	-29.8	171	130	H
			9.945414	53.78	PK-U	37.2	-41.7	0	49.28	-	-	68.2	-18.92	303	229	H
			9.948336	54.2	PK-U	37.2	-41.5	0	49.9	-	-	68.2	-18.3	264	205	V
			* 11.444289	40.99	ADR	38.3	-40.6	0	38.69	54	-15.31	-	-	298	166	H
			* 11.46424	52.37	PK-U	38.3	-40.6	0	50.07	-	-	74	-23.93	298	166	H
			* 11.47653	40.85	ADR	38.3	-40.7	0	38.45	54	-15.55	-	-	189	130	V
	5700	6 + 5	* 11.47853	52.15	PK-U	38.3	-40.6	0	49.85	-	-	74	-24.15	189	130	V
			* 1.268069	49.18	ADR	29.1	-48.9	0	29.38	54	-24.62	-	-	155	209	V
			* 1.270776	60.82	PK-U	29.1	-48.8	0	41.12	-	-	74	-32.88	155	209	V
			* 1.270884	49.24	ADR	29.1	-48.8	0	29.54	54	-24.46	-	-	105	310	H
			* 1.277784	60.63	PK-U	29.2	-48.8	0	41.03	-	-	74	-32.97	105	310	H
			* 3.931459	44.31	ADR	33.4	-45.5	0	32.21	54	-21.79	-	-	267	188	V
			* 3.931506	55.73	PK-U	33.4	-45.5	0	43.63	-	-	74	-30.37	267	188	V
			* 3.937292	55.57	PK-U	33.4	-45.5	0	43.47	-	-	74	-30.53	205	124	H
			* 3.941552	44.22	ADR	33.4	-45.5	0	32.12	54	-21.88	-	-	205	124	H
			* 12.43688	40.6	ADR	39	-39.4	0	40.2	54	-13.8	-	-	5	265	V
			* 12.446262	52.05	PK-U	39	-39.2	0	51.85	-	-	74	-22.15	141	261	H
			* 12.454964	40.52	ADR	39	-39.5	0	40.02	54	-13.98	-	-	141	261	H
			* 12.45856	52.21	PK-U	39	-39.4	0	51.81	-	-	74	-22.19	5	265	V
			* 1.70415	48.57	ADR	29	-48.9	0	28.67	54	-25.33	-	-	169	187	H
	5720	6 + 5	* 1.707077	59.82	PK-U	29	-48.8	0	40.02	-	-	74	-33.98	169	187	H
			* 1.708437	59.61	PK-U	29	-48.8	0	39.81	-	-	74	-34.19	119	268	V
			* 3.869723	44.34	ADR	33.5	-45.5	0	32.34	54	-21.66	-	-	257	184	H
			* 3.87407	55.84	PK-U	33.5	-45.4	0	43.94	-	-	74	-30.06	229	296	V
			* 3.877503	55.51	PK-U	33.5	-45.3	0	43.71	-	-	74	-30.29	257	184	H
			* 3.87899	44.33	ADR	33.5	-45.3	0	32.53	54	-21.47	-	-	229	296	V
			1.743043	48.5	ADR	29.6	-48.9	0	29.2	-	-	-	-	119	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5510	6 + 5	* 1.289785	62.88	PK-U	29.2	-50.3	0	41.78	-	-	74	-32.22	0	101	H
			* 1.292458	51.39	ADR	29.2	-50.25	0	30.34	54	-23.66	-	-	0	101	H
			* 4.711833	59.29	PK-U	33.8	-48.93	0	44.16	-	-	74	-29.84	0	101	H
			* 4.710513	47.76	ADR	33.8	-49	0	32.56	54	-21.44	-	-	0	101	H
			* 1.239265	63.18	PK-U	29.2	-50.23	0	42.15	-	-	74	-31.85	0	200	V
			* 1.240441	51.25	ADR	29.2	-50.26	0	30.19	54	-23.81	-	-	0	200	V
			* 4.867978	59.92	PK-U	33.9	-48.9	0	44.92	-	-	74	-29.08	0	200	V
			* 4.869257	48.23	ADR	33.9	-48.8	0	33.33	54	-20.67	-	-	0	200	V
			17.593359	56.26	PK-U	41.6	-41.6	0	56.26	-	-	68.2	-11.94	0	200	H
			17.608961	56.47	PK-U	41.6	-41.4	0	56.67	-	-	68.2	-11.53	0	200	V
	5550	6 + 5	* 1.290564	62.78	PK-U	29.2	-50.24	0	41.74	-	-	74	-32.26	0	200	H
			* 1.290917	51.37	ADR	29.2	-50.21	0	30.36	54	-23.64	-	-	0	200	H
			* 4.98379	59.25	PK-U	33.9	-48.3	0	44.85	-	-	74	-29.15	0	101	H
			* 4.985596	47.68	ADR	33.9	-48.3	0	33.28	54	-20.72	-	-	0	101	H
			* 1.236152	62.54	PK-U	29.2	-50.22	0	41.52	-	-	74	-32.48	0	101	V
			* 1.23476	50.95	ADR	29.2	-50.22	0	29.93	54	-24.07	-	-	0	101	V
			* 4.794942	59.25	PK-U	33.9	-48.7	0	44.45	-	-	74	-29.55	0	200	V
			* 4.796137	47.33	ADR	33.9	-48.7	0	32.53	54	-21.47	-	-	0	200	V
			17.625942	56.76	PK-U	41.6	-41.89	0	56.47	-	-	68.2	-11.73	0	200	V
			17.66125	57.15	PK-U	41.6	-42.7	0	56.05	-	-	68.2	-12.15	0	200	H
	5670	6 + 5	2.013019	49.86	ADR	31.7	-48.87	0	32.69	-	-	-	-	360	101	V
			2.01409	61.68	PK-U	31.7	-48.77	0	44.61	-	-	68.2	-23.59	360	101	H
			2.01791	49.89	ADR	31.7	-48.92	0	32.67	-	-	-	-	360	101	H
			2.019032	61.7	PK-U	31.7	-48.96	0	44.44	-	-	68.2	-23.76	360	101	V
			8.463831	57.58	PK-U	35.9	-44.77	0	48.71	-	-	74	-25.29	360	101	V
			8.469649	45.98	ADR	35.9	-44.59	0	37.29	54	-16.71	-	-	360	101	V
			8.470737	46.05	ADR	35.9	-44.5	0	37.45	54	-16.55	-	-	360	101	H
			8.478945	57.31	PK-U	35.9	-44.5	0	48.71	-	-	74	-25.29	360	101	H
			10.794143	59.54	PK-U	37.8	-45.23	0	52.11	-	-	74	-21.89	360	101	H
			10.801441	59.39	PK-U	37.8	-45.28	0	51.91	-	-	74	-22.09	360	101	V
	5710 (Straddle)	6 + 5	10.8018	47.32	ADR	37.8	-45.31	0	39.81	54	-14.19	-	-	360	101	H
			10.80405	47.39	ADR	37.8	-45.34	0	39.85	54	-14.15	-	-	360	101	V
			* 4.012205	58.43	PK-U	33.3	-47.8	0	43.93	-	-	74	-30.07	233	227	H
			* 4.013199	46.75	ADR	33.3	-47.8	0	32.25	54	-21.75	-	-	233	227	H
			* 4.015216	59.69	PK-U	33.3	-47.8	0	45.19	-	-	74	-28.81	223	271	V
			* 4.01272	46.66	ADR	33.3	-47.8	0	32.16	54	-21.84	-	-	223	271	V
			* 11.420832	56.41	PK-U	38.1	-45.88	0	48.63	-	-	74	-25.37	52	156	H
			* 11.419946	44.9	ADR	38.1	-45.8	0	37.2	54	-16.8	-	-	52	156	H
			* 11.418729	56.41	PK-U	38.1	-45.8	0	48.71	-	-	74	-25.29	85	364	V
			* 11.418775	45.18	ADR	38.1	-45.8	0	37.48	54	-16.52	-	-	85	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5530	6 + 5	* 4.155939	59.06	PK-U	33.3	-47.8	0	44.56	-	-	74	-29.44	28	208	H
			* 4.153723	46.11	ADR	33.3	-47.9	0	31.51	54	-22.49	-	-	28	208	H
			* 4.154405	57.93	PK-U	33.3	-47.86	0	43.37	-	-	74	-30.63	104	203	V
			* 4.156665	46.07	ADR	33.4	-47.8	0	31.67	54	-22.33	-	-	104	203	V
			* 11.063536	57.07	PK-U	37.8	-46.45	0	48.42	-	-	74	-25.58	216	368	H
			* 11.061633	45.06	ADR	37.8	-46.46	0	36.4	54	-17.6	-	-	216	368	H
			* 11.060428	57.42	PK-U	37.8	-46.4	0	48.82	-	-	74	-25.18	325	279	V
			* 11.061619	45.05	ADR	37.8	-46.46	0	36.39	54	-17.61	-	-	325	279	V
			16.588704	56.59	PK-U	41.3	-44.4	0	53.49	-	-	68.2	-14.71	85	199	H
			16.590023	56.35	PK-U	41.3	-44.4	0	53.25	-	-	68.2	-14.95	279	253	V
	5610	6 + 5	* 11.222299	55.36	PK-U	38	-44.2	0	49.16	-	-	74	-24.84	303	162	H
			* 11.222546	43.53	ADR	38	-44.2	0	37.33	54	-16.67	-	-	303	162	H
			* 11.222668	55.55	PK-U	38	-44.2	0	49.35	-	-	74	-24.65	28	194	V
			* 11.221329	43.51	ADR	38	-44.33	0	37.18	54	-16.82	-	-	28	194	V
			3.174268	58.42	PK-U	32.9	-47.7	0	43.62	-	-	68.2	-24.58	1	173	H
			3.178736	58.44	PK-U	32.9	-47.6	0	43.74	-	-	68.2	-24.46	161	335	V
			16.829349	54.46	PK-U	41.9	-41.8	0	54.56	-	-	68.2	-13.64	359	382	H
			16.832468	55.01	PK-U	41.9	-41.8	0	55.11	-	-	68.2	-13.09	183	235	V
			* 3.986117	57.54	PK-U	33.5	-47.3	0	43.74	-	-	74	-30.26	9	340	H
			* 3.986559	45.94	ADR	33.5	-47.3	0	32.14	54	-21.86	-	-	9	340	H
	5690 (Straddle)	6 + 5	* 3.985776	58.08	PK-U	33.5	-47.3	0	44.28	-	-	74	-29.72	63	270	V
			* 3.985779	45.85	ADR	33.5	-47.3	0	32.05	54	-21.95	-	-	63	270	V
			* 11.380972	55.47	PK-U	38	-44.3	0	49.17	-	-	74	-24.83	278	373	H
			* 11.382323	43.65	ADR	38	-44.23	0	37.42	54	-16.58	-	-	278	373	H
			* 11.384168	55.39	PK-U	38.1	-44.3	0	49.19	-	-	74	-24.81	106	283	V
			* 11.383529	43.6	ADR	38.1	-44.3	0	37.4	54	-16.6	-	-	106	283	V
			17.069301	53.29	PK-U	41.8	-41.2	0	53.89	-	-	68.2	-14.31	346	236	V
			17.073674	53.07	PK-U	41.8	-41.2	0	53.67	-	-	68.2	-14.53	278	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5570	6 + 5	* 4.558872	58.63	PK-U	34.1	-47.9	0	44.83	-	-	74	-29.17	0	200	H
			* 4.555349	46.56	ADR	34.1	-47.93	0	32.73	54	-21.27	-	-	0	200	H
			* 4.506412	58.57	PK-U	34	-47.8	0	44.77	-	-	74	-29.23	0	101	V
			* 4.506782	46.52	ADR	34	-47.8	0	32.72	54	-21.28	-	-	0	101	V
			1.730978	61.34	PK-U	29.3	-49.5	0	41.14	-	-	68.2	-27.06	0	101	H
			1.899662	61.33	PK-U	30.9	-49.3	0	42.93	-	-	68.2	-25.27	0	101	V
			16.546479	54.57	PK-U	41.4	-42.05	0	53.92	-	-	68.2	-14.28	0	199	H
			16.595885	54.74	PK-U	41.6	-41.81	0	54.53	-	-	68.2	-13.67	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

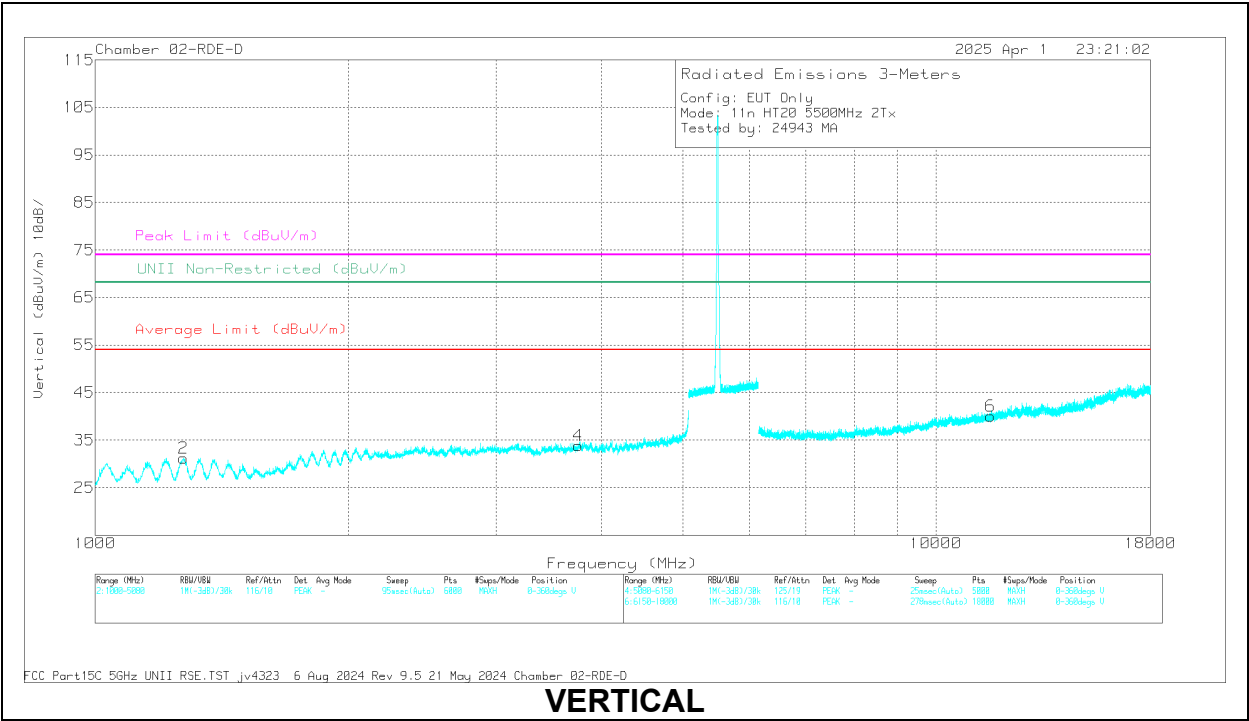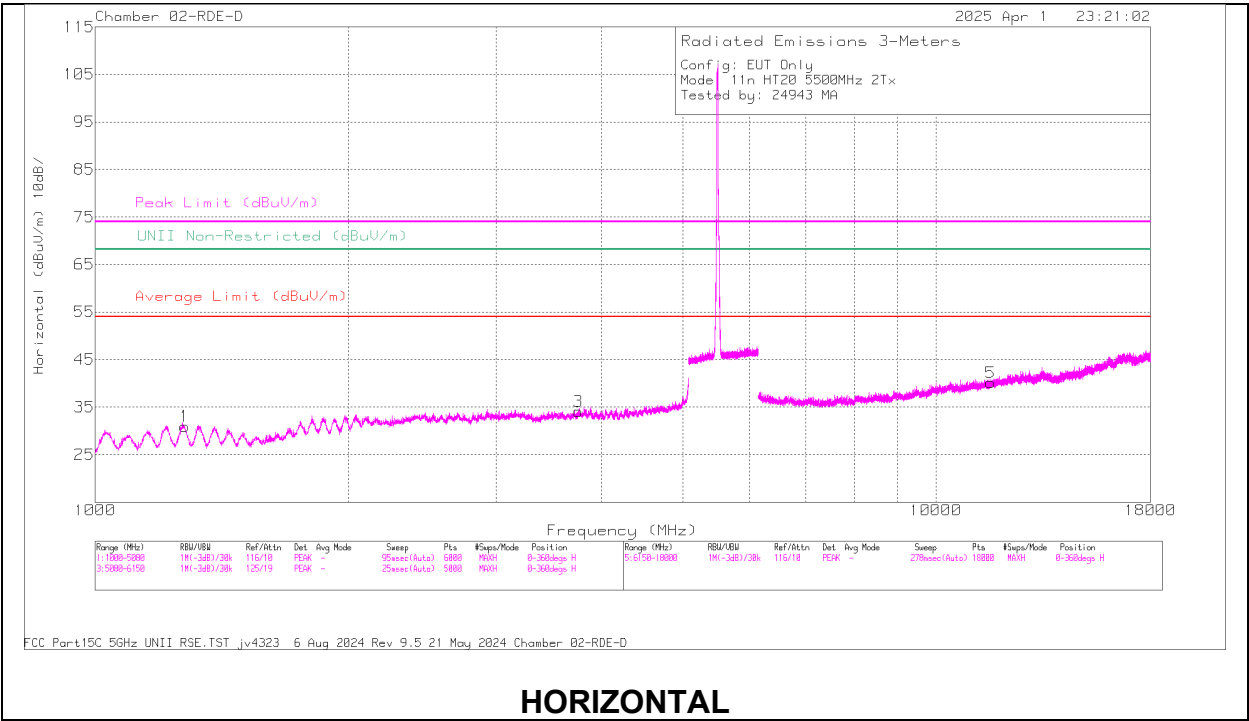

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 11.601782	40.57	ADR	38.3	-40.4	0	38.47	54	-15.53	-	-	360	200	V
5	* 11.603055	40.6	ADR	38.3	-40.3	0	38.6	54	-15.4	-	-	360	101	H
6	* 11.606698	52.13	PK-U	38.3	-40.4	0	50.03	-	-	74	-23.97	360	200	V
5	* 11.618135	52.25	PK-U	38.3	-40.4	0	50.15	-	-	74	-23.85	360	101	H
2	* 1.270622	49.21	ADR	29.1	-48.8	0	29.51	54	-24.49	-	-	360	101	V
1	* 1.271049	49.2	ADR	29.1	-48.8	0	29.5	54	-24.5	-	-	360	101	H
2	* 1.272149	60.66	PK-U	29.1	-49	0	40.76	-	-	74	-33.24	360	101	V
1	* 1.273683	60.59	PK-U	29.2	-48.7	0	41.09	-	-	74	-32.91	360	101	H
4	* 3.748861	56.19	PK-U	33.3	-45.8	0	43.69	-	-	74	-30.31	360	101	V
3	* 3.760042	56.8	PK-U	33.4	-45.7	0	44.5	-	-	74	-29.5	360	101	H
3	* 3.763408	44.76	ADR	33.4	-45.8	0	32.36	54	-21.64	-	-	360	101	H
4	* 3.765188	44.71	ADR	33.4	-45.6	0	32.51	54	-21.49	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.24. 802.11be MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5500	6 + 5	* 1.20507	60.61	PK-U	28.7	-48.8	0	40.51	-	-	74	-33.49	217	226	H
			* 1.213203	49.6	ADR	28.8	-48.8	0	29.6	54	-24.4	-	-	217	226	H
			* 1.213687	60.43	PK-U	28.8	-48.8	0	40.43	-	-	74	-33.57	178	116	V
			* 1.214727	49.34	ADR	28.8	-48.8	0	29.34	54	-24.66	-	-	178	116	V
			* 12.435465	40.48	ADR	39	-39.4	0	40.08	54	-13.92	-	-	65	244	V
			* 12.458273	51.84	PK-U	39	-39.5	0	51.34	-	-	74	-22.66	65	244	V
			* 12.459169	40.42	ADR	39	-39.4	0	40.02	54	-13.98	-	-	305	221	H
			* 12.468067	52.12	PK-U	39	-39.5	0	51.62	-	-	74	-22.38	305	221	H
			* 3.857848	55.87	PK-U	33.5	-45.4	0	43.97	-	-	74	-30.03	158	260	V
			* 3.862602	55.65	PK-U	33.5	-45.4	0	43.75	-	-	74	-30.25	158	137	H
	5580	6 + 5	* 3.867329	44.4	ADR	33.5	-45.5	0	32.4	54	-21.6	-	-	158	137	H
			* 3.890448	44.4	ADR	33.5	-45.1	0	32.8	54	-21.2	-	-	158	260	V
			* 1.272863	49.34	ADR	29.2	-48.8	0	29.74	54	-24.26	-	-	45	122	H
			* 1.273548	49.24	ADR	29.2	-48.7	0	29.74	54	-24.26	-	-	111	233	V
			* 1.273868	60.91	PK-U	29.2	-48.7	0	41.41	-	-	74	-32.59	111	233	V
			* 1.279383	60.63	PK-U	29.2	-48.8	0	41.03	-	-	74	-32.97	45	122	H
			* 2.810584	45.73	ADR	32.5	-46.9	0	31.33	54	-22.67	-	-	165	215	V
			* 2.815884	57.75	PK-U	32.5	-46.8	0	43.45	-	-	74	-30.55	165	215	V
			* 2.821618	45.81	ADR	32.5	-46.8	0	31.51	54	-22.49	-	-	173	162	H
			* 2.824398	57.63	PK-U	32.5	-46.9	0	43.23	-	-	74	-30.77	173	162	H
	5700	6 + 5	8.531752	53.78	PK-U	36	-42.2	0	47.58	-	-	68.2	-20.62	22	396	H
			8.536837	53.34	PK-U	36	-42.2	0	47.14	-	-	68.2	-21.06	78	288	V
			8.538597	41.97	ADR	36	-42.1	0	35.87	-	-	-	-	22	396	H
			8.548646	41.84	ADR	36	-42.2	0	35.64	-	-	-	-	78	288	V
			* 11.625415	40.88	ADR	38.3	-40.4	0	38.78	54	-15.22	-	-	225	167	H
			* 11.630767	52.69	PK-U	38.3	-40.4	0	50.59	-	-	74	-23.41	323	227	V
			* 11.635029	40.47	ADR	38.3	-40.1	0	38.67	54	-15.33	-	-	323	227	V
			* 11.654424	52.13	PK-U	38.4	-40.5	0	50.03	-	-	74	-23.97	225	167	H
			* 1.693253	48.52	ADR	28.9	-48.9	0	28.52	54	-25.48	-	-	205	212	V
			* 1.696119	60.22	PK-U	28.9	-48.8	0	40.32	-	-	74	-33.68	205	212	V
	5720	6 + 5	* 1.701663	60.3	PK-U	28.9	-48.9	0	40.3	-	-	74	-33.7	71	352	H
			* 1.70213	48.6	ADR	28.9	-48.9	0	28.6	54	-25.4	-	-	71	352	H
			* 4.500254	45.43	ADR	33.9	-46.3	0	33.03	54	-20.97	-	-	260	158	V
			* 4.508408	45.22	ADR	33.9	-45.9	0	33.22	54	-20.78	-	-	246	101	H
			* 4.511648	57.85	PK-U	33.9	-45.9	0	45.85	-	-	74	-28.15	246	101	H
			* 4.523887	56.97	PK-U	34	-45.9	0	45.07	-	-	74	-28.93	260	158	V
			* 11.587908	53.44	PK-U	38.3	-40.3	0	51.44	-	-	74	-22.56	181	245	H
			* 11.58957	40.64	ADR	38.3	-40.3	0	38.64	54	-15.36	-	-	181	245	H
			* 11.602201	52.49	PK-U	38.3	-40.4	0	50.39	-	-	74	-23.61	331	173	V
			* 11.604818	40.57	ADR	38.3	-40.5	0	38.37	54	-15.63	-	-	331	173	V
	5720	6 + 5	* 1.268225	49.32	ADR	29.1	-48.9	0	29.52	54	-24.48	-	-	142	345	H
			* 1.269481	61.06	PK-U	29.1	-48.8	0	41.36	-	-	74	-32.64	111	157	V
			* 1.271112	60.74	PK-U	29.1	-48.8	0	41.04	-	-	74	-32.96	142	345	H
			* 1.271988	49.13	ADR	29.1	-49	0	29.23	54	-24.77	-	-	111	157	V
			* 4.267927	57.52	PK-U	33.6	-46.3	0	44.82	-	-	74	-29.18	271	101	V
			* 4.272694	45.31	ADR	33.6	-46.4	0	32.51	54	-21.49	-	-	271	101	V
			* 4.275008	45.25	ADR	33.6	-46.3	0	32.55	54	-21.45	-	-	192	265	H
			* 4.278701	56.92	PK-U	33.6	-46.4	0	44.12	-	-	74	-29.88	192	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (52T/ Highest PSD)	5500 (Low Index)	6 + 5	* 9.334389	57.06	PK-U	36.4	-43.76	0	49.7	-	-	74	-24.3	44	293	H
			* 9.335738	45.7	ADR	36.4	-43.76	0	38.34	54	-15.66	-	-	44	293	H
			* 9.319599	57.71	PK-U	36.4	-43.74	0	50.37	-	-	74	-23.63	356	371	V
			* 9.31992	45.58	ADR	36.4	-43.75	0	38.23	54	-15.77	-	-	356	371	V
			1.991833	61.52	PK-U	31.4	-48.84	0	44.08	-	-	68.2	-24.12	101	112	H
			1.992401	50	ADR	31.4	-48.86	0	32.54	-	-	-	-	101	112	H
			1.994722	49.95	ADR	31.4	-48.96	0	32.39	-	-	-	-	139	167	V
			1.995996	61.59	PK-U	31.4	-49.03	0	43.96	-	-	68.2	-24.24	139	167	V
			3.050778	47.49	ADR	33	-47.23	0	33.26	-	-	-	-	309	260	V
			3.051118	47.4	ADR	33	-47.22	0	33.18	-	-	-	-	217	295	H
			3.05188	59.25	PK-U	33	-47.17	0	45.08	-	-	68.2	-23.12	309	260	V
			3.052242	59.39	PK-U	33	-47.17	0	45.22	-	-	68.2	-22.98	217	295	H
	5580 (Low Index)	6 + 5	* 4.037843	56.99	PK-U	33.2	-45.94	0	44.25	-	-	74	-29.75	344	135	H
			* 4.035613	45.31	ADR	33.2	-45.88	0	32.63	54	-21.37	-	-	344	135	H
			* 4.034002	57.23	PK-U	33.2	-45.92	0	44.51	-	-	74	-29.49	283	284	V
			* 4.03129	45.43	ADR	33.2	-45.96	0	32.67	54	-21.33	-	-	283	284	V
			* 11.85677	56.74	PK-U	38.6	-43.41	0	51.93	-	-	74	-22.07	24	384	H
			* 11.857196	45.26	ADR	38.6	-43.41	0	40.45	54	-13.55	-	-	24	384	H
			* 11.864676	56.78	PK-U	38.6	-43.38	0	52	-	-	74	-22	224	109	V
			* 11.86438	45.08	ADR	38.6	-43.4	0	40.28	54	-13.72	-	-	224	109	V
			2.095412	61.4	PK-U	31.7	-49.35	0	43.75	-	-	68.2	-24.45	173	207	V
			2.097949	61.63	PK-U	31.7	-49.27	0	44.06	-	-	68.2	-24.14	349	164	H
			2.098004	49.81	ADR	31.7	-49.27	0	32.24	-	-	-	-	173	207	V
			2.100454	49.92	ADR	31.7	-49.42	0	32.2	-	-	-	-	349	164	H
	5700 (Mid Index)	6 + 5	* 10.724281	57.66	PK-U	37.7	-44.22	0	51.14	-	-	74	-22.86	43	132	H
			* 10.723449	46.05	ADR	37.7	-44.21	0	39.54	54	-14.46	-	-	43	132	H
			* 10.723478	57.49	PK-U	37.7	-44.21	0	50.98	-	-	74	-23.02	317	192	V
			* 10.723839	46.07	ADR	37.7	-44.2	0	39.57	54	-14.43	-	-	317	192	V
			1.946578	61.67	PK-U	31.1	-49.13	0	43.64	-	-	68.2	-24.56	340	234	H
			1.946844	50.2	ADR	31.1	-49.13	0	32.17	-	-	-	-	340	234	H
			1.947606	50.18	ADR	31.1	-49.12	0	32.16	-	-	-	-	14	211	V
			1.949474	61.49	PK-U	31.1	-49.21	0	43.38	-	-	68.2	-24.82	14	211	V
			3.203517	58.83	PK-U	32.8	-46.88	0	44.75	-	-	68.2	-23.45	25	196	H
			3.203685	47.04	ADR	32.8	-46.88	0	32.96	-	-	-	-	25	196	H
			3.21088	57.75	PK-U	32.8	-46.77	0	43.78	-	-	68.2	-24.42	88	375	V
			3.211931	46.64	ADR	32.8	-46.77	0	32.67	-	-	-	-	88	375	V
	5720 (High Index)	6 + 5	1.944	61.67	PK-U	31.1	-49.25	0	43.52	-	-	68.2	-24.68	244	126	V
			1.944019	61.66	PK-U	31.1	-49.25	0	43.51	-	-	68.2	-24.69	227	309	H
			1.944558	50.16	ADR	31.1	-49.21	0	32.05	-	-	-	-	244	126	V
			1.94459	50.05	ADR	31.1	-49.21	0	31.94	-	-	-	-	227	309	H
			3.277314	57.18	PK-U	32.7	-46.65	0	43.23	-	-	68.2	-24.97	204	113	V
			3.27894	45.49	ADR	32.7	-46.69	0	31.5	-	-	-	-	204	113	V
			3.283532	45.62	ADR	32.7	-46.62	0	31.7	-	-	-	-	159	236	H
			3.285273	57.37	PK-U	32.7	-46.66	0	43.41	-	-	68.2	-24.79	159	236	H
			10.469675	46.2	ADR	37.5	-45.21	0	38.49	-	-	-	-	168	384	H
			10.470975	58.3	PK-U	37.5	-45.08	0	50.72	-	-	68.2	-17.48	168	384	H
			10.473439	46.23	ADR	37.5	-45.13	0	38.6	-	-	-	-	112	149	V
			10.475747	57.9	PK-U	37.5	-45.03	0	50.37	-	-	68.2	-17.83	112	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5510	6 + 5	* 1.239866	62.2	PK-U	28.5	-49.89	0	40.81	-	-	74	-33.19	0	101	H
			* 1.239347	50.5	ADR	28.5	-49.83	0	29.17	54	-24.83	-	-	0	101	H
			* 4.571414	58.35	PK-U	34.1	-47.76	0	44.69	-	-	74	-29.31	0	199	H
			* 4.571487	46.73	ADR	34.1	-47.75	0	33.08	54	-20.92	-	-	0	199	H
			* 1.289012	62.3	PK-U	28.5	-49.5	0	41.3	-	-	74	-32.7	0	101	V
			* 1.289002	50.35	ADR	28.5	-49.5	0	29.35	54	-24.65	-	-	0	101	V
			* 4.718418	58.21	PK-U	34.1	-48	0	44.31	-	-	74	-29.69	0	199	V
			* 4.720868	46.67	ADR	34.1	-48	0	32.77	54	-21.23	-	-	0	199	V
			17.012096	53.67	PK-U	41.9	-41.51	0	54.06	-	-	68.2	-14.14	0	199	V
			17.016157	53.82	PK-U	41.9	-41.5	0	54.22	-	-	68.2	-13.98	0	199	H
			* 1.239061	62.06	PK-U	28.5	-49.81	0	40.75	-	-	74	-33.25	0	200	H
			* 1.238043	50.53	ADR	28.5	-49.8	0	29.23	54	-24.77	-	-	0	200	H
	5550	6 + 5	* 4.809812	58.29	PK-U	34	-47.9	0	44.39	-	-	74	-29.61	0	101	H
			* 4.810844	46.73	ADR	34	-47.9	0	32.83	54	-21.17	-	-	0	101	H
			* 1.294041	62.44	PK-U	28.5	-49.6	0	41.34	-	-	74	-32.66	0	101	V
			* 1.293204	50.19	ADR	28.5	-49.52	0	29.17	54	-24.83	-	-	0	101	V
			* 4.852675	58.59	PK-U	34	-48	0	44.59	-	-	74	-29.41	0	200	V
			* 4.853913	46.91	ADR	34	-48	0	32.91	54	-21.09	-	-	0	200	V
			17.033721	53.77	PK-U	41.8	-41.7	0	53.87	-	-	68.2	-14.33	0	200	H
			17.079242	54.28	PK-U	41.8	-41.2	0	54.88	-	-	68.2	-13.32	0	200	V
			* 1.232659	61.9	PK-U	28.5	-49.8	0	40.6	-	-	74	-33.4	0	199	H
			* 1.234831	50.58	ADR	28.5	-49.8	0	29.28	54	-24.72	-	-	0	199	H
			* 4.674272	58.33	PK-U	34.1	-48.07	0	44.36	-	-	74	-29.64	0	199	H
			* 4.672333	46.74	ADR	34.1	-48.1	0	32.74	54	-21.26	-	-	0	199	H
	5670	6 + 5	* 1.23734	62.02	PK-U	28.5	-49.73	0	40.79	-	-	74	-33.21	0	199	V
			* 1.235644	50.56	ADR	28.5	-49.74	0	29.32	54	-24.68	-	-	0	199	V
			4.499965	57.98	PK-U	34	-47.7	0	44.28	-	-	68.2	-23.92	0	199	V
			16.541724	54.43	PK-U	41.4	-42	0	53.83	-	-	68.2	-14.37	0	199	V
			16.554923	54.72	PK-U	41.4	-42.1	0	54.02	-	-	68.2	-14.18	0	199	H
			* 1.233501	62.22	PK-U	28.5	-49.8	0	40.92	-	-	74	-33.08	0	101	H
			* 1.236113	50.53	ADR	28.5	-49.7	0	29.33	54	-24.67	-	-	0	101	H
			* 1.288501	62.47	PK-U	28.5	-49.5	0	41.47	-	-	74	-32.53	0	101	V
			* 1.289247	50.3	ADR	28.5	-49.5	0	29.3	54	-24.7	-	-	0	101	V
			* 4.326692	56.92	PK-U	33.6	-47.47	0	43.05	-	-	74	-30.95	0	101	V
			* 4.325219	45.68	ADR	33.6	-47.48	0	31.8	54	-22.2	-	-	0	101	V
			4.499919	58.11	PK-U	34	-47.7	0	44.41	-	-	68.2	-23.79	0	101	H
	5710 (Straddle)	6 + 5	17.052378	53.78	PK-U	41.8	-41.24	0	54.34	-	-	68.2	-13.86	0	200	V
			17.078778	53.58	PK-U	41.8	-41.2	0	54.18	-	-	68.2	-14.02	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (242T / Highest PSD)	5510 (Low Index)	6 + 5	1.988111	61.23	PK-U	31.4	-49.03	0	43.6	-	-	68.2	-24.6	54	228	H
			1.988349	49.89	ADR	31.4	-49.02	0	32.27	-	-	-	-	54	228	H
			1.992528	50.03	ADR	31.4	-48.86	0	32.57	-	-	-	-	334	274	V
			1.993063	61.89	PK-U	31.4	-48.88	0	44.41	-	-	68.2	-23.79	334	274	V
			3.143254	58.62	PK-U	32.9	-47.12	0	44.4	-	-	68.2	-23.8	98	191	V
			3.143369	47.08	ADR	32.9	-47.13	0	32.85	-	-	-	-	98	191	V
			3.14451	58.67	PK-U	32.9	-47.18	0	44.39	-	-	68.2	-23.81	151	208	H
			3.1447	46.97	ADR	32.9	-47.18	0	32.69	-	-	-	-	151	208	H
			8.96161	44.64	ADR	36.2	-42.77	0	38.07	-	-	-	-	61	112	H
			8.962566	56.88	PK-U	36.2	-42.75	0	50.33	-	-	68.2	-17.87	61	112	H
	5550 (Low Index)	6 + 5	8.966116	56.27	PK-U	36.2	-42.62	0	49.85	-	-	68.2	-18.35	140	332	V
			8.966591	44.65	ADR	36.2	-42.65	0	38.2	-	-	-	-	140	332	V
			3.648785	58.26	PK-U	33.6	-46.86	0	45	-	-	74	-29	360	101	V
			3.651559	57.93	PK-U	33.6	-46.64	0	44.89	-	-	74	-29.11	360	101	H
			3.659159	46.6	ADR	33.5	-47.1	0	33	54	-21	-	-	360	101	H
			3.659965	46.5	ADR	33.5	-47.15	0	32.85	54	-21.15	-	-	360	101	V
			10.07624	60.22	PK-U	37.4	-46.24	0	51.38	-	-	68.2	-16.82	360	101	V
			10.087603	59.96	PK-U	37.4	-46.28	0	51.08	-	-	68.2	-17.12	360	101	H
			10.088892	48.55	ADR	37.4	-46.17	0	39.78	-	-	-	-	360	101	H
			10.092964	48.38	ADR	37.4	-46.11	0	39.67	-	-	-	-	360	101	V
	5670 (High Index)	6 + 5	13.570502	47.55	ADR	38.9	-43.8	0	42.65	-	-	-	-	360	101	H
			13.583914	47.55	ADR	38.9	-43.88	0	42.57	-	-	-	-	360	101	V
			13.584768	59.36	PK-U	38.9	-44.02	0	54.24	-	-	68.2	-13.96	360	101	H
			13.596145	59.67	PK-U	38.8	-43.96	0	54.51	-	-	68.2	-13.69	360	101	V
			* 1.546035	57.97	PK-U	28	-46.21	0	39.76	-	-	74	-34.24	350	304	H
			* 1.547765	46.12	ADR	28	-46.2	0	27.92	54	-26.08	-	-	350	304	H
			* 3.814052	54.75	PK-U	33.3	-44.77	0	43.28	-	-	74	-30.72	33	275	H
			* 3.813233	42.89	ADR	33.3	-44.78	0	31.41	54	-22.59	-	-	33	275	H
			* 3.814308	40.45	PK-U	33.3	-44.77	0	28.98	-	-	74	-45.02	138	199	V
			* 3.812465	42.95	ADR	33.3	-44.8	0	31.45	54	-22.55	-	-	138	199	V
	5710 (High Index) (Straddle)	6 + 5	* 3.813499	54.58	PK-U	33.3	-44.78	0	43.1	-	-	74	-30.9	196	269	V
			* 3.814735	43.05	ADR	33.3	-44.76	0	31.59	54	-22.41	-	-	196	269	V
			* 11.542309	53.25	PK-U	38	-40.29	0	50.96	-	-	74	-23.04	28	376	H
			* 11.542732	41.37	ADR	38	-40.25	0	39.12	54	-14.88	-	-	28	376	H
			* 11.546092	52.4	PK-U	38	-40.12	0	50.28	-	-	74	-23.72	238	224	V
			* 11.546296	41.06	ADR	38	-40.12	0	38.94	54	-15.06	-	-	238	224	V
			* 1.356413	57.88	PK-U	28.6	-46.32	0	40.16	-	-	74	-33.84	202	244	H
			* 1.356569	46.37	ADR	28.6	-46.32	0	28.65	54	-25.35	-	-	202	244	H
			* 3.695272	54.7	PK-U	33.1	-44.69	0	43.11	-	-	74	-30.89	32	244	H
			* 3.696457	43.31	ADR	33.1	-44.68	0	31.73	54	-22.27	-	-	32	244	H
			* 1.355037	58.4	PK-U	28.6	-46.32	0	40.68	-	-	74	-33.32	148	199	V
			* 1.357822	46.45	ADR	28.6	-46.3	0	28.75	54	-25.25	-	-	148	199	V
			* 3.690086	54.85	PK-U	33.1	-44.79	0	43.16	-	-	74	-30.84	349	219	V
			* 3.688651	43.02	ADR	33.1	-44.81	0	31.31	54	-22.69	-	-	349	219	V
			* 11.495182	52.82	PK-U	38	-40.24	0	50.58	-	-	74	-23.42	123	353	H
			* 11.4964	40.95	ADR	38	-40.22	0	38.73	54	-15.27	-	-	123	353	H
			* 11.495844	52.56	PK-U	38	-40.22	0	50.34	-	-	74	-23.66	4	373	V
			* 11.49714	41.14	ADR	38	-40.22	0	38.92	54	-15.08	-	-	4	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be ((106+26)T/ Highest PSD)	5510 (Low Index)	6 + 5	* 2.212992	61.06	PK-U	31.8	-50.3	0	42.56	-	-	74	-31.44	360	101	H
			* 2.273125	49.4	ADR	31.8	-50.3	0	30.9	54	-23.1	-	-	360	101	H
			* 2.275817	60.88	PK-U	31.8	-50.31	0	42.37	-	-	74	-31.63	360	199	V
			* 2.271543	49.31	ADR	31.8	-50.3	0	30.81	54	-23.19	-	-	360	199	V
			* 8.302304	56.09	PK-U	36	-45.7	0	46.39	-	-	74	-27.61	360	101	H
			* 8.286936	44.14	ADR	36	-45.74	0	34.4	54	-19.6	-	-	360	101	H
			* 15.617553	53.64	PK-U	41.1	-41.84	0	52.9	-	-	74	-21.1	360	199	H
			* 15.596157	41.65	ADR	41.1	-41.48	0	41.27	54	-12.73	-	-	360	199	H
			* 8.292819	56.48	PK-U	36	-45.69	0	46.79	-	-	74	-27.21	360	199	V
			* 8.284717	44.04	ADR	36	-45.77	0	34.27	54	-19.73	-	-	360	199	V
			* 15.635648	53.39	PK-U	41.2	-41.92	0	52.67	-	-	74	-21.33	360	199	V
			* 15.632004	41.65	ADR	41.2	-41.95	0	40.9	54	-13.1	-	-	360	199	V
	5550 (Mid Index)	6 + 5	1.896914	61.59	PK-U	31.3	-50.28	0	42.61	-	-	68.2	-25.59	242	301	H
			1.895447	50.17	ADR	31.3	-50.28	0	31.19	-	-	-	-	242	301	H
			3.6449	58.37	PK-U	33.3	-47.65	0	44.02	-	-	74	-29.98	159	399	H
			3.642926	46.36	ADR	33.3	-47.69	0	31.97	54	-22.03	-	-	159	399	H
			1.899051	61.93	PK-U	31.3	-50.27	0	42.96	-	-	68.2	-25.24	94	249	V
			1.895945	50.31	ADR	31.3	-50.29	0	31.32	-	-	-	-	94	249	V
			3.644065	57.81	PK-U	33.3	-47.69	0	43.42	-	-	74	-30.58	138	237	V
			3.647145	46.44	ADR	33.3	-47.66	0	32.08	54	-21.92	-	-	138	237	V
			11.773181	55.51	PK-U	38.7	-44.2	0	50.01	-	-	74	-23.99	138	199	H
			11.793435	43.8	ADR	38.7	-44.14	0	38.36	54	-15.64	-	-	138	199	H
			11.801047	55.84	PK-U	38.7	-44.11	0	50.43	-	-	74	-23.57	138	199	V
			11.789972	44.02	ADR	38.7	-44.16	0	38.56	54	-15.44	-	-	138	199	V
	5670 (High Index)	6 + 5	1.94252	62.2	PK-U	31.5	-50.22	0	43.48	-	-	68.2	-24.72	315	145	H
			1.940613	50.36	ADR	31.5	-50.27	0	31.59	-	-	-	-	315	145	H
			3.54816	57.98	PK-U	33.2	-47.53	0	43.65	-	-	74	-30.35	205	130	H
			3.539693	45.87	ADR	33.2	-47.53	0	31.54	54	-22.46	-	-	205	130	H
			1.939171	62	PK-U	31.5	-50.28	0	43.22	-	-	68.2	-24.98	32	152	V
			1.940897	50.34	ADR	31.5	-50.27	0	31.57	-	-	-	-	32	152	V
			3.539755	57.82	PK-U	33.2	-47.53	0	43.49	-	-	74	-30.51	235	266	V
			3.569362	45.86	ADR	33.2	-47.65	0	31.41	54	-22.59	-	-	235	266	V
			11.423969	55.82	PK-U	38	-44.91	0	48.91	-	-	74	-25.09	235	101	H
			11.393889	43.4	ADR	38	-44.96	0	36.44	54	-17.56	-	-	235	101	H
			11.39131	55.15	PK-U	38	-44.9	0	48.25	-	-	74	-25.75	235	200	V
			11.398795	43.54	ADR	38	-44.91	0	36.63	54	-17.37	-	-	235	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMOCDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5530	6 + 5	* 2.848285	60.55	PK-U	32.5	0	-48.7	44.35	-	-	74	-29.65	102	334	H
			* 2.846932	47.88	ADR	32.5	0	-48.71	31.67	54	-22.33	-	-	102	334	H
			* 2.844842	59.95	PK-U	32.5	0	-48.7	43.75	-	-	74	-30.25	23	231	V
			* 2.845443	47.88	ADR	32.5	0	-48.74	31.64	54	-22.36	-	-	23	231	V
			* 11.065896	55.77	PK-U	37.9	0	-44.8	48.87	-	-	74	-25.13	80	305	H
			* 11.065138	44.18	ADR	37.9	0	-44.8	37.28	54	-16.72	-	-	80	305	H
			* 11.061664	55.56	PK-U	37.9	0	-44.73	48.73	-	-	74	-25.27	350	238	V
			* 11.063042	43.91	ADR	37.9	0	-44.7	37.11	54	-16.89	-	-	350	238	V
			16.587778	53.82	PK-U	41.5	0	-42	53.32	-	-	68.2	-14.88	250	343	V
			16.589307	54.16	PK-U	41.5	0	-41.93	53.73	-	-	68.2	-14.47	135	235	H
			* 1.290646	62.11	PK-U	28.5	0	-49.56	41.05	-	-	74	-32.95	360	199	H
			* 1.290602	50.32	ADR	28.5	0	-49.56	29.26	54	-24.74	-	-	360	199	H
	5610	6 + 5	* 4.618365	58.38	PK-U	34.1	0	-47.8	44.68	-	-	74	-29.32	360	101	H
			* 4.620128	46.43	ADR	34.1	0	-47.8	32.73	54	-21.27	-	-	360	101	H
			* 1.182156	62.36	PK-U	28.1	0	-49.9	40.56	-	-	74	-33.44	360	101	V
			* 1.181931	50.52	ADR	28.1	0	-49.89	28.73	54	-25.27	-	-	360	101	V
			* 4.57313	58.36	PK-U	34.1	0	-47.79	44.67	-	-	74	-29.33	360	199	V
			* 4.575416	46.5	ADR	34.1	0	-47.8	32.8	54	-21.2	-	-	360	199	V
			16.523403	54.95	PK-U	41.4	0	-42.1	54.25	-	-	68.2	-13.95	360	199	H
			16.534071	54.5	PK-U	41.4	0	-41.91	53.99	-	-	68.2	-14.21	360	199	V
			* 1.240333	62.13	PK-U	28.5	0	-49.87	40.76	-	-	74	-33.24	360	101	H
			* 1.241991	50.51	ADR	28.5	0	-49.7	29.31	54	-24.69	-	-	360	101	H
			* 4.251715	57.79	PK-U	33.5	0	-47.2	44.09	-	-	74	-29.91	360	199	H
			* 4.252807	45.94	ADR	33.5	0	-47.2	32.24	54	-21.76	-	-	360	199	H
	5690 (Straddle)	6 + 5	* 1.231671	62.01	PK-U	28.5	0	-49.8	40.71	-	-	74	-33.29	360	199	V
			* 1.232765	50.09	ADR	28.5	0	-49.8	28.79	54	-25.21	-	-	360	199	V
			* 4.563428	58.52	PK-U	34.1	0	-47.8	44.82	-	-	74	-29.18	360	199	V
			* 4.564879	46.58	ADR	34.1	0	-47.89	32.79	54	-21.21	-	-	360	199	V
			17.61223	52.77	PK-U	41.9	0	-40.2	54.47	-	-	68.2	-13.73	360	199	H
			17.614467	52.72	PK-U	41.9	0	-40.25	54.37	-	-	68.2	-13.83	360	199	V
11be (484T / Highest PSD)	5530 (Low Index)	6 + 5	* 2.28206	61.13	PK-U	31.8	0	-50.29	42.64	-	-	74	-31.36	1	101	H
			* 2.269987	49.47	ADR	31.8	0	-50.29	30.98	54	-23.02	-	-	1	101	H
			* 2.266993	61.16	PK-U	31.7	0	-50.29	42.57	-	-	74	-31.43	1	101	V
			* 2.2859	49.47	ADR	31.8	0	-50.25	31.02	54	-22.98	-	-	1	101	V
			* 8.229381	55.72	PK-U	36.1	0	-45.74	46.08	-	-	74	-27.92	1	101	H
			* 8.249603	44.14	ADR	36.1	0	-45.8	34.44	54	-19.56	-	-	1	101	H
			* 15.719492	53.96	PK-U	41.2	0	-42.2	52.96	-	-	74	-21.04	1	101	H
			* 15.740354	41.98	ADR	41.2	0	-42.21	40.97	54	-13.03	-	-	1	101	H
			* 8.229608	55.88	PK-U	36.1	0	-45.74	46.24	-	-	74	-27.76	1	101	V
			* 8.257234	44.13	ADR	36	0	-45.79	34.34	54	-19.66	-	-	1	101	V
			* 15.772132	53.89	PK-U	41.2	0	-42.2	52.89	-	-	74	-21.11	1	101	V
			* 15.760568	42.13	ADR	41.2	0	-42.15	41.18	54	-12.82	-	-	1	101	V
	5610 (Low Index)	6 + 5	* 1.497085	60.58	PK-U	27.9	0	-49.23	39.25	-	-	74	-34.75	0	101	H
			* 1.496658	48.78	ADR	27.9	0	-49.24	27.44	54	-26.56	-	-	0	101	H
			* 1.498118	60.18	PK-U	27.9	0	-49.25	38.83	-	-	74	-35.17	0	101	V
			* 1.498131	48.83	ADR	27.9	0	-49.25	27.48	54	-26.52	-	-	0	101	V
			* 7.46482	57.24	PK-U	35.6	0	-46.86	45.98	-	-	74	-28.02	0	101	H
			* 7.46602	45.22	ADR	35.6	0	-46.84	33.98	54	-20.02	-	-	0	101	H
			* 15.724051	53.54	PK-U	41.2	0	-42.2	52.54	-	-	74	-21.46	0	101	H
			* 15.708838	42.13	ADR	41.2	0	-42.22	41.11	54	-12.89	-	-	0	101	H
			* 7.400378	56.92	PK-U	35.6	0	-46.68	45.84	-	-	74	-28.16	0	101	V
			* 7.405702	45.12	ADR	35.6	0	-46.75	33.97	54	-20.03	-	-	0	101	V
			* 15.737589	53.65	PK-U	41.2	0	-42.18	52.67	-	-	74	-21.33	0	101	V
			* 15.744536	42.12	ADR	41.2	0	-42.2	41.12	54	-12.88	-	-	0	101	V
	5690 (Straddle) (High Index)	6 + 5	1.938359	61.21	PK-U	31	0	-49.13	43.08	-	-	68.2	-25.12	46	327	H
			1.940878	49.93	ADR	31.1	0	-49.15	31.88	-	-	-	-	46	327	H
			1.941147	49.9	ADR	31.1	0	-49.16	31.84	-	-	-	-	47	244	V
			1.942684	61.85	PK-U	31.1	0	-49.27	43.68	-	-	68.2	-24.52	47	244	V
			3.204148	58.24	PK-U	32.8	0	-46.88	44.16	-	-	68.2	-24.04	314	342	V
			3.205034	46.29	ADR	32.8	0	-46.91	32.18	-	-	-	-	314	342	V
			3.210739	46.13	ADR	32.8	0	-46.78	32.15	-	-	-	-	85	231	H
			3.212477	57.73	PK-U	32.8	0	-46.76	43.77	-	-	68.2	-24.43	85	231	H
			12.930191	57.2	PK-U	39.1	0	-43.22	53.08	-	-	68.2	-15.12	39	105	H
			12.93183	44.82	ADR	39.1	0	-43.19	40.73	-	-	-	-	39	105	H
			12.936907	45.13	ADR	39.1	0	-43.08	41.15	-	-	-	-	139	337	V
			12.937576	57.22	PK-U	39.1	0	-43.09	53.23	-	-	68.2	-14.97	139	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMOCDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (52T / Highest PSD)	5530 (Low Index)	6 + 5	* 2.338447	60.51	PK-U	32.1	-49.98	0	42.63	-	-	74	-31.37	1	101	H
			* 2.33726	48.87	ADR	32.1	-49.98	0.17	31.16	54	-22.84	-	-	1	101	H
			* 2.339257	60.56	PK-U	32.1	-49.96	0	42.7	-	-	74	-31.3	1	101	V
			* 2.351204	48.92	ADR	32.2	-49.95	0.17	31.34	54	-22.66	-	-	1	101	V
			* 8.310086	56.03	PK-U	36	-45.55	0	46.48	-	-	74	-27.52	1	101	H
			* 8.299592	44.2	ADR	36	-45.72	0.17	34.65	54	-19.35	-	-	1	101	H
			* 15.877647	53.75	PK-U	41.2	-41.52	0	53.43	-	-	74	-20.57	1	101	H
			* 15.8851	42.01	ADR	41.2	-41.44	0.17	41.94	54	-12.06	-	-	1	101	H
			* 8.299667	55.73	PK-U	36	-45.72	0	46.01	-	-	74	-27.99	1	101	V
			* 8.281956	44.26	ADR	36	-45.8	0.17	34.63	54	-19.37	-	-	1	101	V
			* 15.843197	53.52	PK-U	41.2	-42.13	0	52.59	-	-	74	-21.41	1	101	V
			* 15.84769	42.21	ADR	41.2	-42.07	0.17	41.51	54	-12.49	-	-	1	101	V
	5610 (Mid Index)	6 + 5	* 2.335422	61.46	PK-U	32.1	-49.97	0	43.59	-	-	74	-30.41	0	101	H
			* 2.326915	49.25	ADR	32.1	-49.94	0.17	31.58	54	-22.42	-	-	0	101	H
			* 2.319508	67.74	PK-U	32	-49.94	0	49.8	-	-	74	-24.2	0	101	V
			* 2.336055	49.03	ADR	32.1	-49.98	0.17	31.32	54	-22.68	-	-	0	101	V
			8.658867	56.14	PK-U	36	-45.23	0	46.91	-	-	68.2	-21.29	0	101	H
			8.680996	44.09	ADR	36	-45.25	0.17	35.01	-	-	-	-	0	101	H
			* 15.587484	54.02	PK-U	41.1	-41.55	0	53.57	-	-	74	-20.43	0	101	H
			* 15.587733	41.91	ADR	41.1	-41.56	0.17	41.62	54	-12.38	-	-	0	101	H
			* 8.312397	55.77	PK-U	36	-45.59	0	46.18	-	-	74	-27.82	0	101	V
			* 8.302472	44.17	ADR	36	-45.69	0.17	34.65	54	-19.35	-	-	0	101	V
			* 15.702919	53.69	PK-U	41.2	-42.17	0	52.72	-	-	74	-21.28	0	101	V
			* 15.713466	42.32	ADR	41.2	-42.23	0.17	41.46	54	-12.54	-	-	0	101	V
	5690 (Straddle) (High Index)	6 + 5	1.938575	61.61	PK-U	31	-49.12	0	43.49	-	-	68.2	-24.71	24	358	V
			1.94007	49.73	ADR	31.1	-49.15	0.17	31.85	-	-	-	-	24	358	V
			1.94448	61.91	PK-U	31.1	-49.22	0	43.79	-	-	68.2	-24.41	352	399	H
			1.945661	50.11	ADR	31.1	-49.14	0.17	32.24	-	-	-	-	352	399	H
			3.038465	59.07	PK-U	33	-47.6	0	44.47	-	-	68.2	-23.73	87	198	H
			3.038949	47.38	ADR	33	-47.57	0.17	32.98	-	-	-	-	87	198	H
			3.045583	47.25	ADR	33	-47.51	0.17	32.91	-	-	-	-	182	245	V
			3.045646	59.1	PK-U	33	-47.5	0	44.6	-	-	68.2	-23.6	182	245	V
			9.286683	45.05	ADR	36.4	-43.36	0.17	38.26	-	-	-	-	173	262	H
			9.286889	57.02	PK-U	36.4	-43.38	0	50.04	-	-	68.2	-18.16	173	262	H
			9.298369	57.02	PK-U	36.4	-43.66	0	49.76	-	-	68.2	-18.44	94	270	V
			9.29901	45.03	ADR	36.4	-43.62	0.17	37.98	-	-	-	-	94	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be SU Mode / Highest Power)	5570	6 + 5	* 1.286625	62.31	PK-U	28.5	0	-49.54	41.27	-	-	74	-32.73	2	199	H
			* 1.286674	50.12	ADR	28.5	0	-49.53	29.09	54	-24.91	-	-	2	199	H
			* 4.559563	58.53	PK-U	34.1	0	-47.84	44.79	-	-	74	-29.21	2	199	H
			* 4.560973	46.62	ADR	34.1	0	-47.8	32.92	54	-21.08	-	-	2	199	H
			* 1.346015	61.89	PK-U	28.5	0	-49.6	40.79	-	-	74	-33.21	2	199	V
			* 1.345782	50.1	ADR	28.5	0	-49.6	29	54	-25	-	-	2	199	V
			* 4.613376	58.31	PK-U	34.1	0	-47.9	44.51	-	-	74	-29.49	2	101	V
			* 4.6137	46.42	ADR	34.1	0	-47.9	32.62	54	-21.38	-	-	2	101	V
			* 16.14485	54.42	PK-U	40.9	0	-42.42	52.9	-	-	74	-21.1	2	200	V
			* 16.143249	42.71	ADR	40.9	0	-42.5	41.11	54	-12.89	-	-	2	200	V
			16.536956	55.33	PK-U	41.4	0	-42	54.73	-	-	68.2	-13.47	2	200	H
			2.00519	61.31	PK-U	32.1	0	-49.76	43.65	-	-	68.2	-24.55	165	241	H
11be (242T / Highest PSD)	5570 (Mid Index)	6 + 5	2.001696	49.81	ADR	32.1	0.1	-49.78	32.23	-	-	-	-	165	241	H
			3.697625	57.85	PK-U	33.2	0	-47.46	43.59	-	-	74	-30.41	201	284	H
			3.697798	45.94	ADR	33.2	0.1	-47.46	31.78	54	-22.22	-	-	201	284	H
			1.994229	61.1	PK-U	32	0	-49.81	43.29	-	-	68.2	-24.91	240	181	V
			1.99596	49.88	ADR	32.1	0.1	-49.8	32.28	-	-	-	-	240	181	V
			3.699494	57.71	PK-U	33.2	0	-47.46	43.45	-	-	74	-30.55	166	304	V
			3.698947	45.8	ADR	33.2	0.1	-47.47	31.63	54	-22.37	-	-	166	304	V
			11.627663	55.25	PK-U	38.4	0	-44.18	49.47	-	-	74	-24.53	166	200	H
			11.647175	43.72	ADR	38.5	0.1	-44.12	38.2	54	-15.8	-	-	166	200	H
			11.631597	55.99	PK-U	38.4	0	-44.13	50.26	-	-	74	-23.74	166	200	V
			11.659886	43.62	ADR	38.5	0.1	-44.34	37.88	54	-16.12	-	-	166	200	V
			1.891768	61.2	PK-U	30.8	0	-49.21	42.79	-	-	68.2	-25.41	291	265	V
11be (52T / Highest PSD)	5570 (Mid Index)	6 + 5	1.893345	49.8	ADR	30.8	0.2	-49.17	31.63	-	-	-	-	291	265	V
			1.89417	49.79	ADR	30.8	0.2	-49.16	31.63	-	-	-	-	303	340	H
			1.895337	61.4	PK-U	30.8	0	-49.18	43.02	-	-	68.2	-25.18	303	340	H
			3.223871	46.1	ADR	32.8	0.2	-46.63	32.47	-	-	-	-	185	126	V
			3.225463	57.75	PK-U	32.8	0	-46.55	44	-	-	68.2	-24.2	185	126	V
			3.226336	57.37	PK-U	32.8	0	-46.55	43.62	-	-	68.2	-24.58	133	358	H
			3.226538	45.73	ADR	32.8	0.2	-46.54	32.19	-	-	-	-	133	358	H
			9.637875	58.27	PK-U	36.7	0	-45.36	49.61	-	-	68.2	-18.59	96	289	V
			9.638547	57.86	PK-U	36.7	0	-45.36	49.2	-	-	68.2	-19	351	143	H
			9.639035	46.49	ADR	36.7	0.2	-45.36	38.03	-	-	-	-	351	143	H
			9.639475	46.58	ADR	36.7	0.2	-45.31	38.17	-	-	-	-	96	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

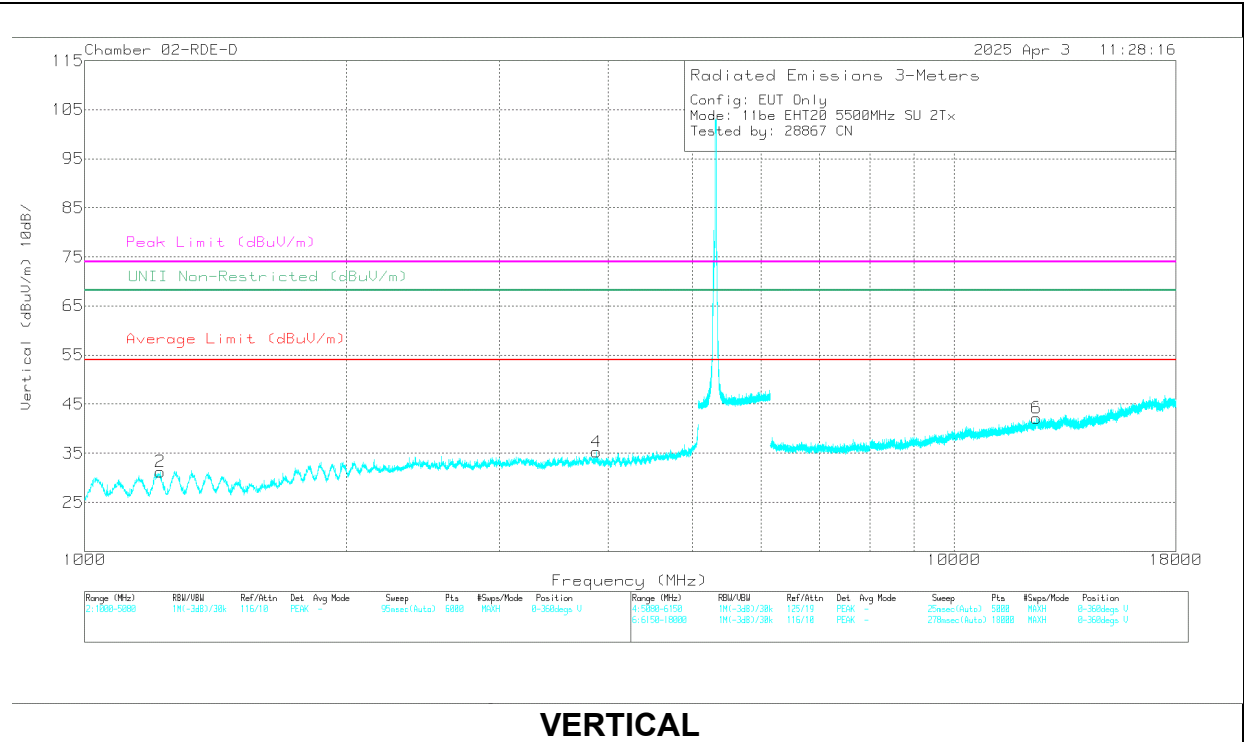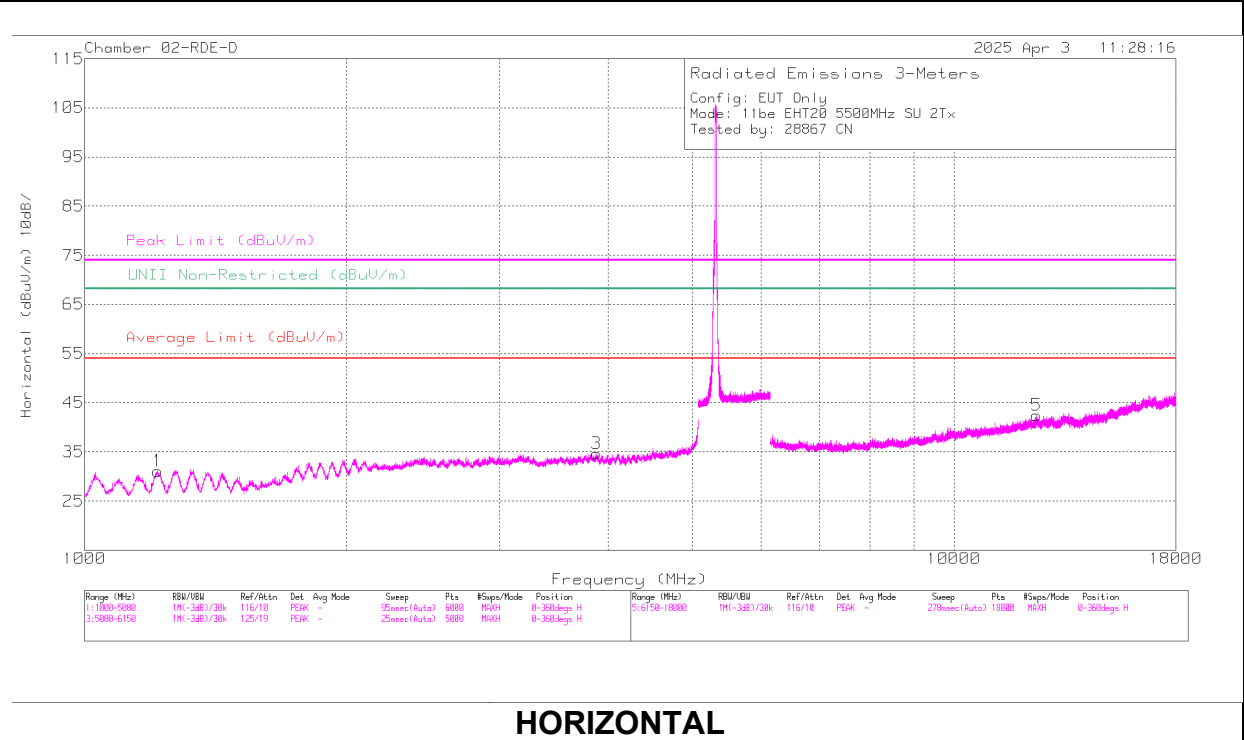

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.20507	60.61	PK-U	28.7	-48.8	0	40.51	-	-	74	-33.49	217	226	H
1	* 1.213203	49.6	ADR	28.8	-48.8	0	29.6	54	-24.4	-	-	217	226	H
2	* 1.213687	60.43	PK-U	28.8	-48.8	0	40.43	-	-	74	-33.57	178	116	V
2	* 1.214727	49.34	ADR	28.8	-48.8	0	29.34	54	-24.66	-	-	178	116	V
6	* 12.435465	40.48	ADR	39	-39.4	0	40.08	54	-13.92	-	-	65	244	V
6	* 12.458273	51.84	PK-U	39	-39.5	0	51.34	-	-	74	-22.66	65	244	V
5	* 12.459169	40.42	ADR	39	-39.4	0	40.02	54	-13.98	-	-	305	221	H
5	* 12.468067	52.12	PK-U	39	-39.5	0	51.62	-	-	74	-22.38	305	221	H
4	* 3.857848	55.87	PK-U	33.5	-45.4	0	43.97	-	-	74	-30.03	158	260	V
3	* 3.862602	55.65	PK-U	33.5	-45.4	0	43.75	-	-	74	-30.25	158	137	H
3	* 3.867329	44.4	ADR	33.5	-45.5	0	32.4	54	-21.6	-	-	158	137	H
4	* 3.890448	44.4	ADR	33.5	-45.1	0	32.8	54	-21.2	-	-	158	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


1.1.25. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5745	6	5.627067	-47.43	Pk	35.2	-37.53	11.8	0	-37.96	-27	-10.96	96	120	H	
			5.725	-22.69	Pk	35	-37.21	11.8	0	-13.1	27	-40.1	96	120	H	
			5.6294	-47.84	Pk	35.2	-37.55	11.8	0	-38.39	-27	-11.39	42	101	V	
			5.725	-24.63	Pk	35	-37.21	11.8	0	-15.04	27	-42.04	42	101	V	
			5.85	-32.91	Pk	35.1	-36.78	11.8	0	-22.79	27	-49.79	85	171	H	
			5.934975	-47.88	Pk	35.2	-36.44	11.8	0	-37.32	-27	-10.32	85	171	H	
	5825		5.85	-33.67	Pk	35.1	-36.78	11.8	0	-23.55	27	-50.55	22	126	V	
			5.960875	-48.43	Pk	35.3	-36.36	11.8	0	-37.69	-27	-10.69	22	126	V	
	5745	5	5.625833	-47.68	Pk	35.2	-37.55	11.8	0	-38.23	-27	-11.23	236	140	H	
			5.725	-23.69	Pk	35	-37.21	11.8	0	-14.1	27	-41.1	236	140	H	
			5.649634	-47.72	Pk	35.1	-37.48	11.8	0	-38.3	-27	-11.3	125	131	V	
			5.725	-20.8	Pk	35	-37.21	11.8	0	-11.21	27	-38.21	125	131	V	
			5.85	-35.14	Pk	35.1	-36.78	11.8	0	-25.02	27	-52.02	234	207	H	
			5.95365	-48.7	Pk	35.3	-36.38	11.8	0	-37.98	-27	-10.98	234	207	H	
5825	5.85		-27.71	Pk	35.1	-36.78	11.8	0	-17.59	27	-44.59	129	115	V		
	5.972425		-48.33	Pk	35.3	-36.34	11.8	0	-37.57	-27	-10.57	129	115	V		
HT40	5755	6	5.645267	-63.46	Pk	34.7	-22.83	11.8	0	-39.79	-27	-12.79	41	131	H	
			5.725	-38.99	Pk	34.7	-22.81	11.8	0	-15.3	27	-42.3	41	131	H	
			5.63915	-64.09	Pk	34.7	-22.79	11.8	0	-40.38	-27	-13.38	32	120	V	
			5.725	-39.71	Pk	34.7	-22.81	11.8	0	-16.02	27	-43.02	32	120	V	
			5.85	-56.82	Pk	35	-33.9	11.8	0	-43.92	27	-70.92	305	144	H	
			5.927347	-64.45	Pk	35.2	-33.8	11.8	0	-51.25	-27	-24.25	305	144	H	
	5795		5.85	-58.28	Pk	35	-33.9	11.8	0	-45.38	27	-72.38	232	123	V	
			5.932157	-64.75	Pk	35.2	-33.8	11.8	0	-51.55	-27	-24.55	232	123	V	
	5755	5	5.64964	-65.96	Pk	34.4	-17.4	11.8	0	-37.16	-27	-10.16	228	163	H	
			5.725	-44.01	Pk	34.5	-17.4	11.8	0	-15.11	27	-42.11	228	163	H	
			5.647971	-66.54	Pk	34.3	-17.5	11.8	0	-37.94	-27	-10.94	143	103	V	
			5.725	-43.68	Pk	34.5	-17.4	11.8	0	-14.78	27	-41.78	143	103	V	
			5.85	-65.13	Pk	34.9	-16.4	11.8	0	-34.83	27	-61.83	231	172	H	
			5.983042	-66.4	Pk	35.2	-16.4	11.8	0	-35.8	-27	-8.8	231	172	H	
	5795		5.85	-60.84	Pk	34.9	-16.4	11.8	0	-30.54	27	-57.54	123	128	V	
			5.989259	-66.38	Pk	35.2	-16.4	11.8	0	-35.78	-27	-8.78	123	128	V	
	VHT80	5775 (Lower)	6	5.647817	-57.59	Pk	34.7	-23.6	11.8	0	-34.69	-27	-7.69	290	103	H
				5.725	-39.04	Pk	34.8	-23.1	11.8	0	-15.54	27	-42.54	290	103	H
5.647534				-56.32	Pk	34.7	-23.6	11.8	0	-33.42	-27	-6.42	239	132	V	
5.725				-39.42	Pk	34.8	-23.1	11.8	0	-15.92	27	-42.92	239	132	V	
5.85				-35.57	Pk	35	-33.9	11.8	0	-22.67	27	-49.67	122	138	H	
5.923606				-51.54	Pk	35.2	-33.8	11.8	0	-38.34	-25.97	-12.37	122	138	H	
5775 (Upper)		5.85		-39.09	Pk	35	-33.9	11.8	0	-26.19	27	-53.19	86	271	V	
		5.933394		-53.63	Pk	35.2	-33.8	11.8	0	-40.43	-27	-13.43	86	271	V	
5775 (Lower)		5	5.65159	-42.76	Pk	34.7	-34.3	11.8	0	-30.56	-25.82	-4.74	73	150	H	
			5.725	-27.21	Pk	34.8	-34.1	11.8	0	-14.71	27	-41.71	73	150	H	
			5.650165	-47.36	Pk	34.7	-34.3	11.8	0	-35.16	-26.88	-8.28	30	144	V	
			5.725	-30.78	Pk	34.8	-34.1	11.8	0	-18.28	27	-45.28	30	144	V	
			5.85	-34.73	Pk	35	-33.9	11.8	0	-21.83	27	-48.83	71	109	H	
			5.930188	-51.08	Pk	35.2	-33.8	11.8	0	-37.88	-27	-10.88	71	109	H	
5775 (Upper)	5.85		-38.61	Pk	35	-33.9	11.8	0	-25.71	27	-52.71	104	276	V		
	5.929203		-53	Pk	35.2	-33.8	11.8	0	-39.8	-27	-12.8	104	276	V		

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

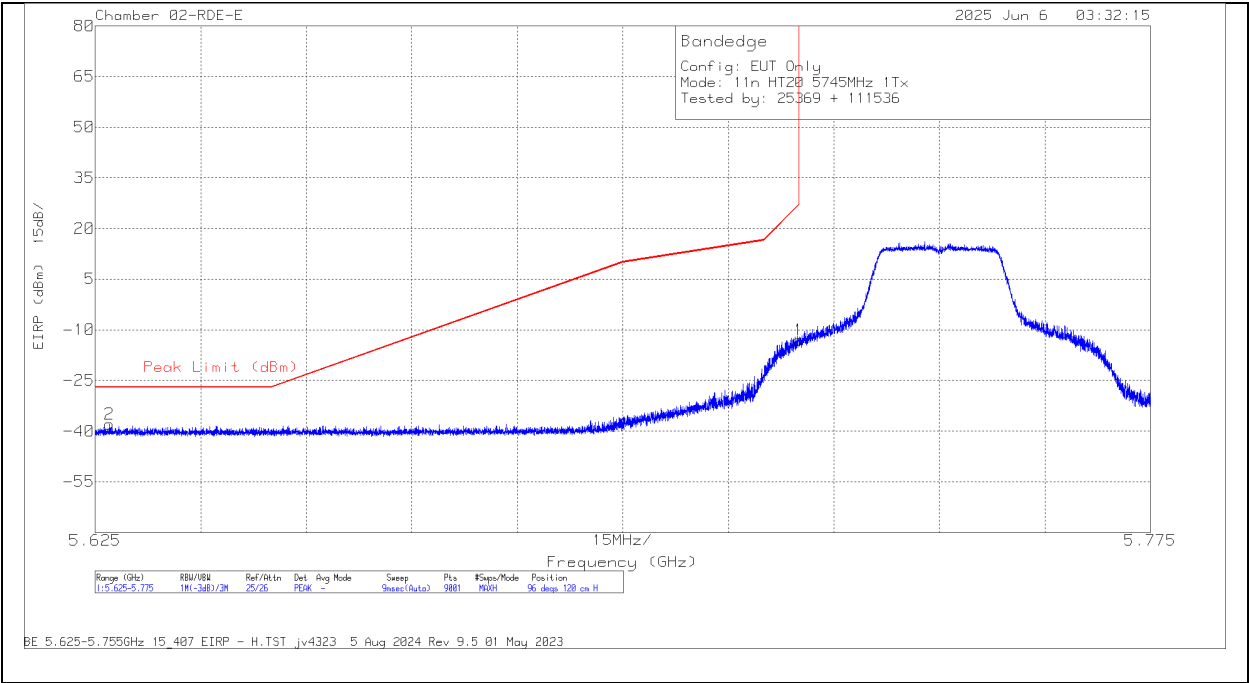


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.627067	-47.43	Pk	35.2	11.8	0	-37.53	-37.96	-27	-10.96	96	120	H
1	5.725	-22.69	Pk	35	11.8	0	-37.21	-13.1	27	-40.1	96	120	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

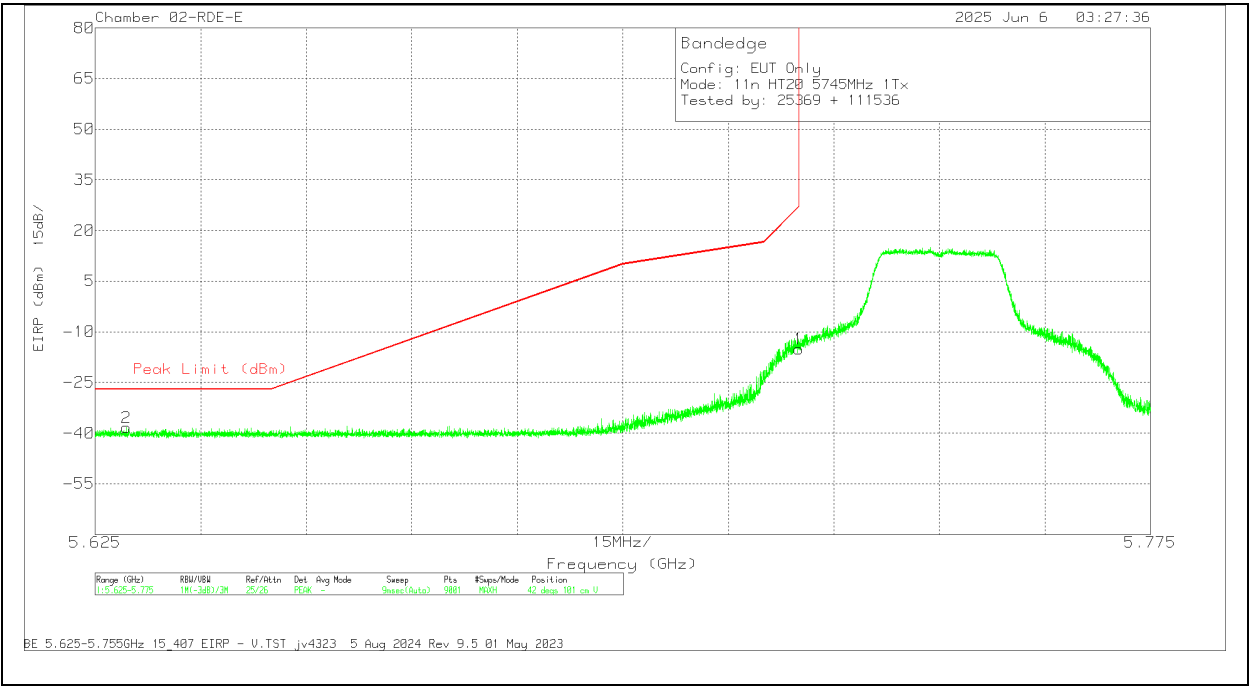


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6294	-47.94	Pk	35.2	11.8	0	-37.55	-38.39	-27	-11.39	42	101	V
1	5.725	-24.63	Pk	35	11.8	0	-37.21	-15.04	27	-42.04	42	101	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHZ)

HORIZONTAL RESULT

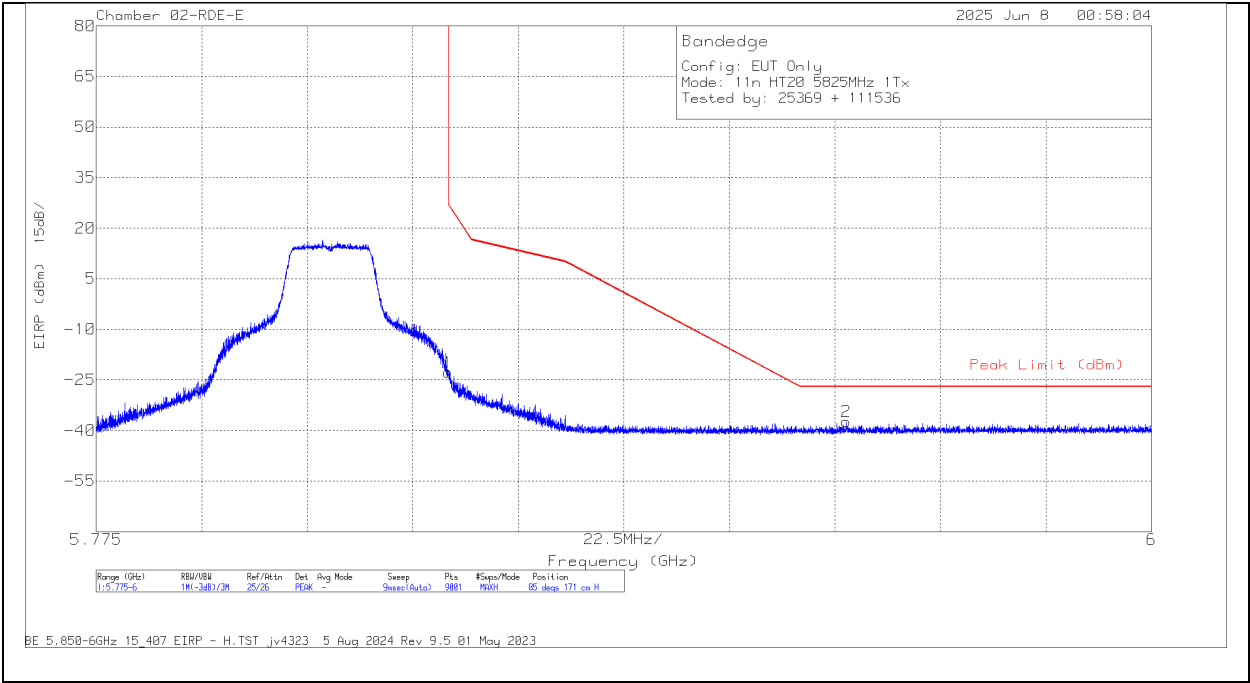


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-32.91	Pk	35.1	11.8	0	-36.78	-22.79	27	-49.79	85	171	H
2	5.934975	-47.88	Pk	35.2	11.8	0	-36.44	-37.32	-27	-10.32	85	171	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHZ)

VERTICAL RESULT

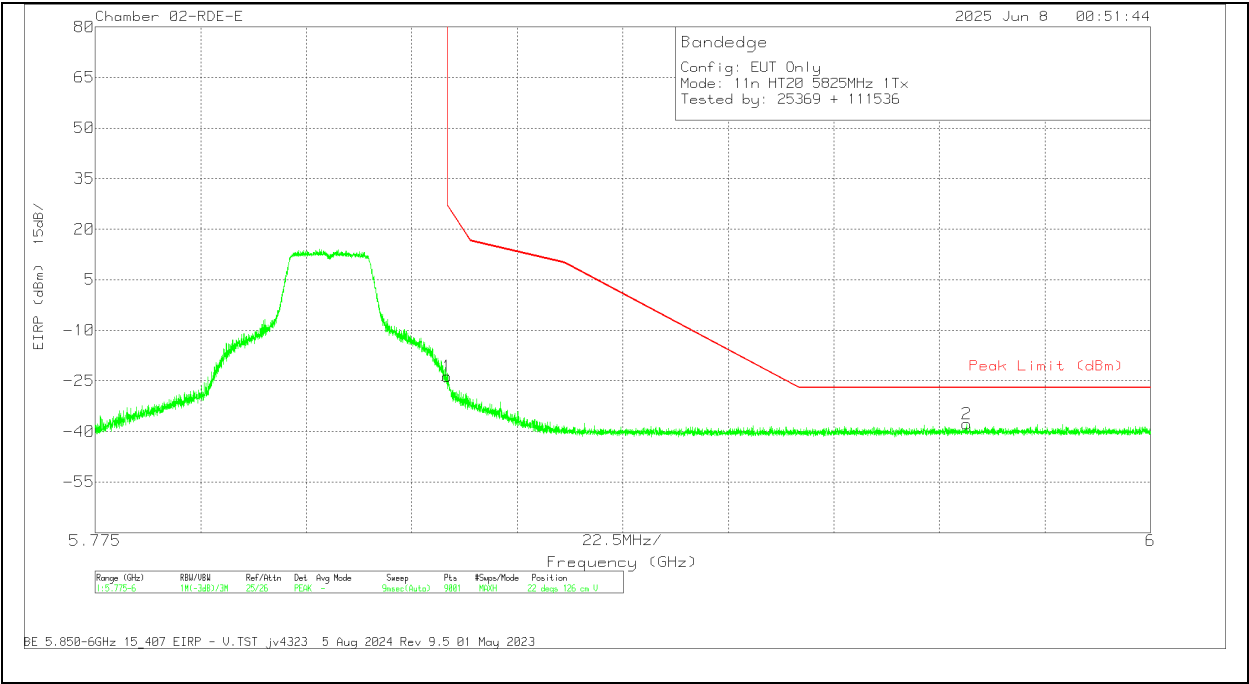

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-33.67	Pk	35.1	11.8	0	-36.78	-23.55	27	-50.55	22	126	V
2	5.960875	-48.43	Pk	35.3	11.8	0	-36.36	-37.69	-27	-10.69	22	126	V

Pk - Peak detector


1.1.26. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6 + 5	5.725	-19.33	Pk	35.1	-37.88	11.8	0	-10.31	27	-37.31	23	157	H
			5.63935	-47.5	Pk	34.9	-38.09	11.8	0	-38.89	-27	-11.89	23	157	H
			5.725	-20.88	Pk	35.1	-37.88	11.8	0	-11.86	27	-38.86	357	168	V
			5.626583	-47.72	Pk	35	-38.19	11.8	0	-39.11	-27	-12.11	357	168	V
	5825		5.85	-30.71	Pk	35.1	-36.78	11.8	0	-20.59	27	-47.59	98	230	H
			5.9888	-48.03	Pk	35.3	-36.31	11.8	0	-37.24	-27	-10.24	98	230	H
			5.85	-30.05	Pk	35.1	-36.78	11.8	0	-19.93	27	-46.93	28	135	V
			5.9564	-48.17	Pk	35.3	-36.38	11.8	0	-37.45	-27	-10.45	28	135	V
HT40	5755	6 + 5	5.651167	-38.79	Pk	34.6	-38.33	11.8	0	-30.72	-26.14	-4.58	215	184	H
			5.725	-13.01	Pk	34.7	-38.2	11.8	0	-4.71	27	-31.71	215	184	H
			5.645634	-45.05	Pk	34.6	-38.26	11.8	0	-36.91	-27	-9.91	191	187	V
			5.725	-23.39	Pk	34.7	-38.2	11.8	0	-15.09	27	-42.09	191	187	V
	5795		5.85	-35.51	Pk	35	-37.82	11.8	0	-26.53	27	-53.53	226	173	H
			5.942325	-45.68	Pk	35.2	-37.5	11.8	0	-36.18	-27	-9.18	226	173	H
			5.85	-40.71	Pk	35	-37.82	11.8	0	-31.73	27	-58.73	209	217	V
			5.945175	-45.13	Pk	35.2	-37.48	11.8	0	-35.61	-27	-8.61	209	217	V
VHT80	5775 (Lower)	6 + 5	5.649684	-39.95	Pk	34.6	-38.36	11.8	0	-31.91	-27	-4.91	210	165	H
			5.725	-20.08	Pk	34.7	-38.2	11.8	0	-11.78	27	-38.78	210	165	H
			5.627033	-44.22	Pk	34.6	-38.15	11.8	0	-35.97	-27	-8.97	195	178	V
			5.725	-33.05	Pk	34.7	-38.2	11.8	0	-24.75	27	-51.75	195	178	V
	5775 (Upper)		5.85	-23.23	Pk	35	-37.82	11.8	0	-14.25	27	-41.25	222	260	H
			5.926825	-41.45	Pk	35.1	-37.55	11.8	0	-32.1	-27	-5.1	222	260	H
			5.85	-33.81	Pk	35	-37.82	11.8	0	-24.83	27	-51.83	207	268	V
			5.927475	-44.38	Pk	35.1	-37.56	11.8	0	-35.04	-27	-8.04	207	268	V

Pk - Peak detector


BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

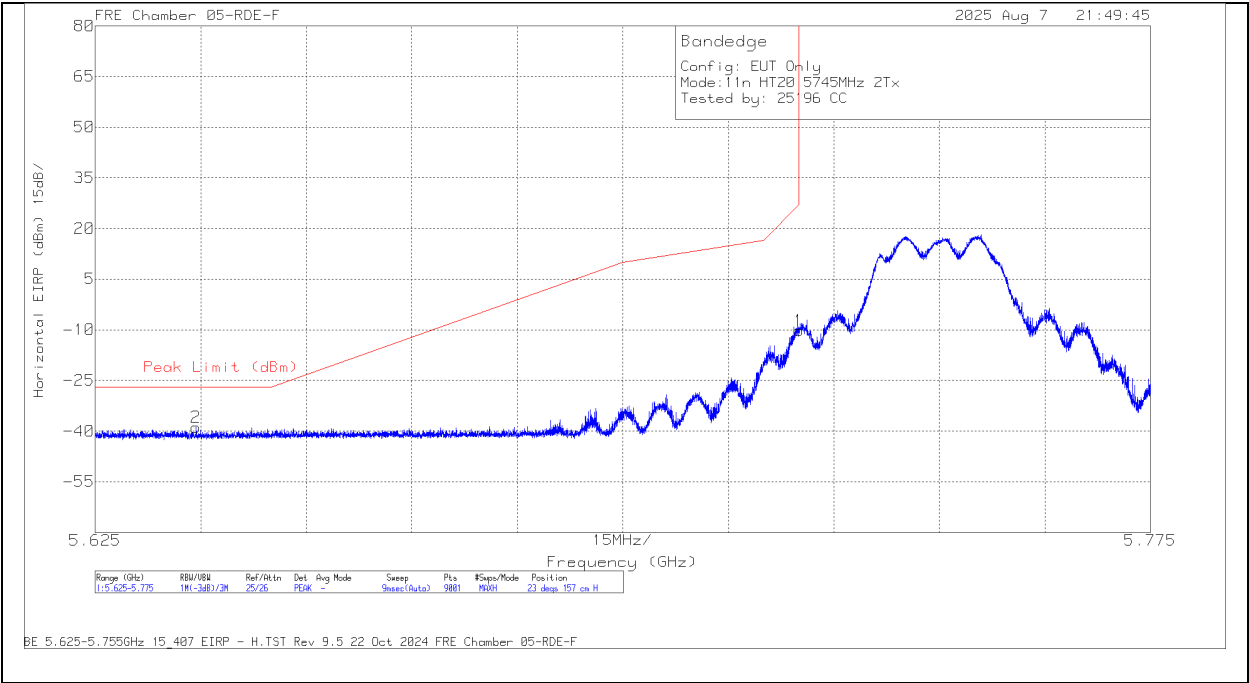

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-19.33	Pk	35.1	11.8	0	-37.88	-10.31	27	-37.31	23	157	H
2	5.63935	-47.5	Pk	34.9	11.8	0	-38.09	-38.89	-27	-11.89	23	157	H

Pk - Peak detector

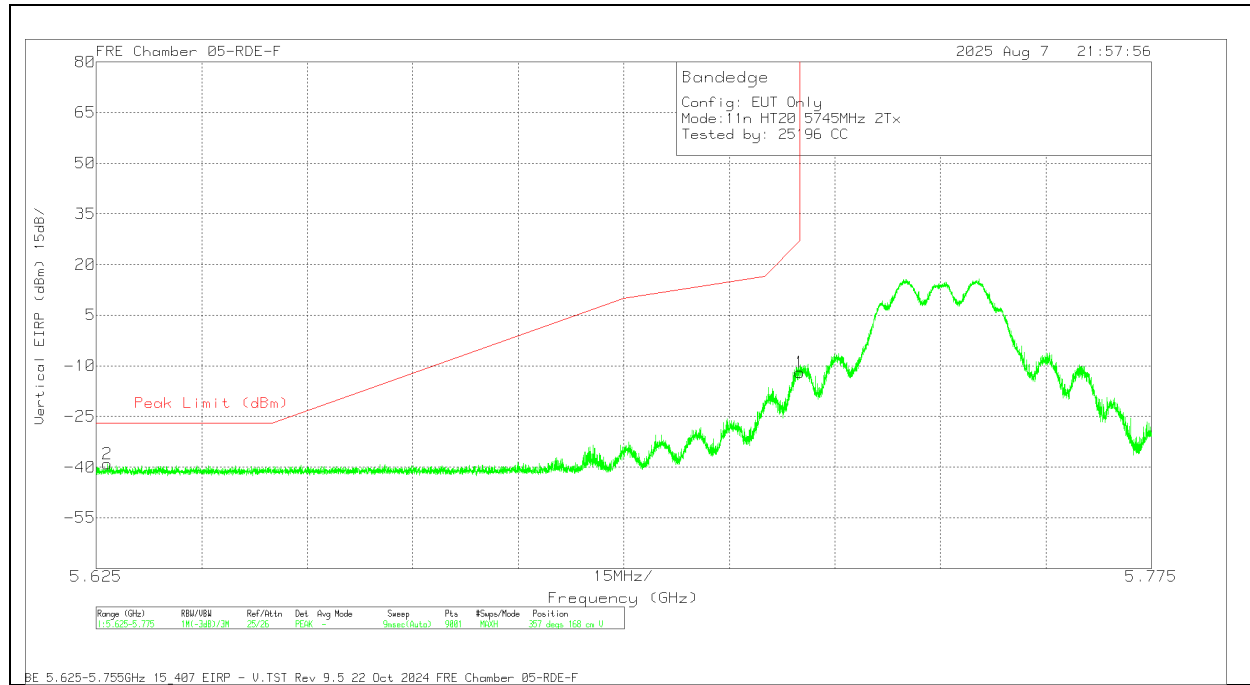
BANDEDGE (LOW CHANNEL / 5745MHz)**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-20.88	Pk	35.1	11.8	-37.88	-11.86	27	-38.86	357	168	V
2	5.626583	-47.72	Pk	35	11.8	-38.19	-39.11	-27	-12.11	357	168	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

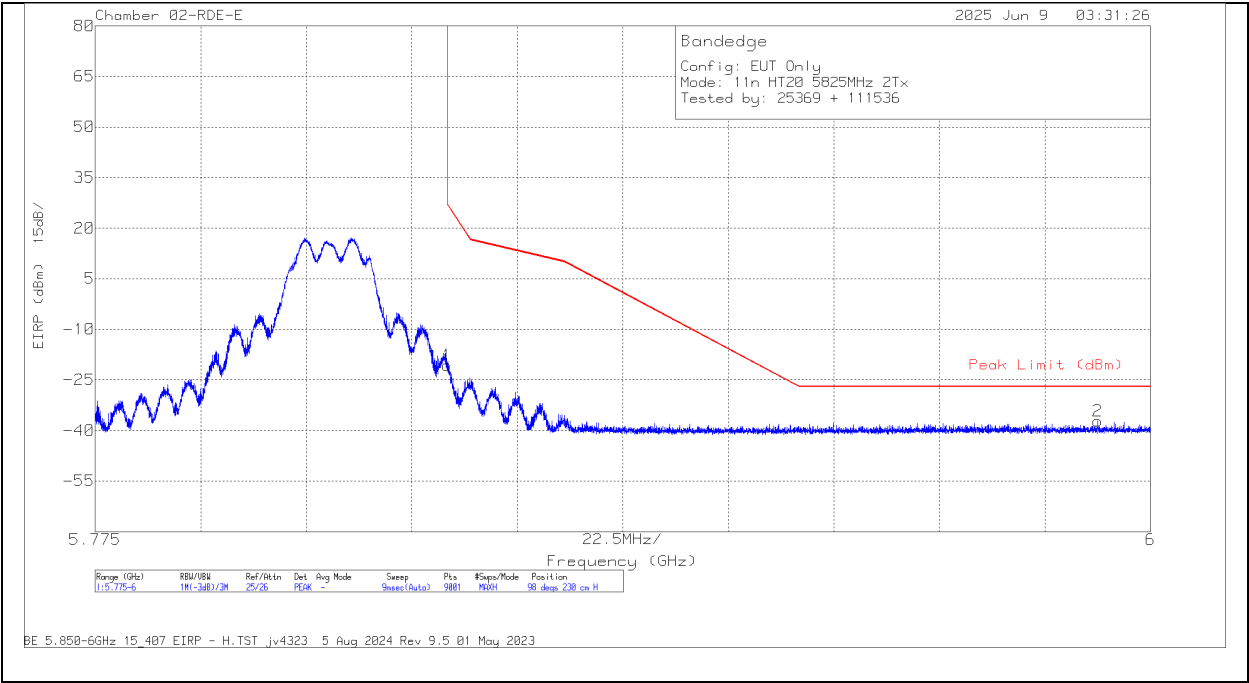


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-30.71	Pk	35.1	11.8	0	-36.78	-20.59	27	-47.59	98	230	H
2	5.9888	-48.03	Pk	35.3	11.8	0	-36.31	-37.24	-27	-10.24	98	230	H

Pk - Peak detector

BANDEGE (HIGH CHANNEL / 5825MHZ)

VERTICAL RESULT

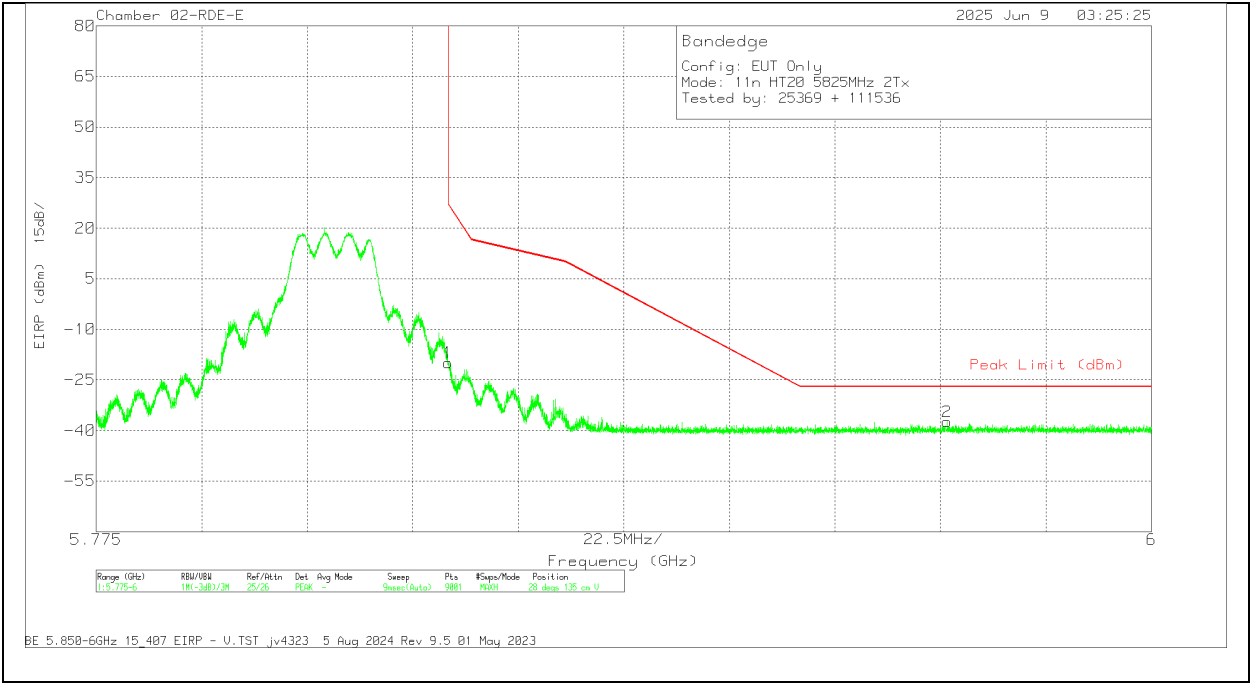

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-30.05	Pk	35.1	11.8	0	-36.78	-19.93	27	-46.93	28	135	V
2	5.9564	-48.17	Pk	35.3	11.8	0	-36.38	-37.45	-27	-10.45	28	135	V

Pk - Peak detector


1.1.27. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 (SU Mode)	5745	6	5.635967	-47.66	Pk	35	-38.39	11.8	0	-39.25	-27	-12.25	234	112	H		
			5.725	-21.18	Pk	35.1	-38.19	11.8	0	-12.47	27	-39.47	234	112	H		
			5.62555	-46.78	Pk	35	-38.46	11.8	0	-38.44	-27	-11.44	178	123	V		
			5.725	-22.92	Pk	35.1	-38.19	11.8	0	-14.21	27	-41.21	178	123	V		
			5.85	-39.79	Pk	35	-29.8	11.8	0	-22.79	27	-49.79	76	115	H		
			5.981467	-54.62	Pk	35.2	-29.5	11.8	0	-37.12	-27	-10.12	76	115	H		
	5825		5.85	-35.55	Pk	35	-29.8	11.8	0	-18.55	27	-45.55	11	180	V		
			5.968246	-54.76	Pk	35.2	-29.5	11.8	0	-37.26	-27	-10.26	11	180	V		
		5745	5	5.638217	-64.03	Pk	34.7	-23.5	11.8	0	-41.03	-27	-14.03	265	129	H	
				5.725	-36.51	Pk	34.8	-23.1	11.8	0	-13.01	27	-40.01	265	129	H	
				5.650117	-64.46	Pk	34.7	-23.5	11.8	0	-41.46	-26.91	-14.55	163	135	V	
				5.725	-34.46	Pk	34.8	-23.1	11.8	0	-10.96	27	-37.96	163	135	V	
	5.85			-38.92	Pk	35	-29.8	11.8	0	-21.92	27	-48.92	149	235	H		
	5.953816			-54.65	Pk	35.2	-29.6	11.8	0	-37.25	-27	-10.25	149	235	H		
5825	5.85	-35.79		Pk	35	-29.8	11.8	0	-18.79	27	-45.79	42	145	V			
	5.966137	-54.86		Pk	35.2	-29.5	11.8	0	-37.36	-27	-10.36	42	145	V			
	EHT40 (SU Mode)	5755	6	5.650151	-46.55	Pk	35	-38.46	11.8	0	-38.21	-26.89	-11.32	261	203	H	
				5.725	-22.58	Pk	35.1	-38.19	11.8	0	-13.87	27	-40.87	261	203	H	
				5.6276	-48	Pk	35	-38.48	11.8	0	-39.68	-27	-12.68	214	172	V	
				5.725	-24.72	Pk	35.1	-38.19	11.8	0	-16.01	27	-43.01	214	172	V	
5.85				-38.12	Pk	35.1	-37.78	11.8	0	-29	27	-56	253	143	H		
5.9588				-48.09	Pk	35.3	-37.51	11.8	0	-38.5	-27	-11.5	253	143	H		
5795		5.85		-42.11	Pk	35.1	-37.78	11.8	0	-32.99	27	-59.99	196	142	V		
		5.95605		-46.96	Pk	35.3	-37.61	11.8	0	-37.47	-27	-10.47	196	142	V		
		5755		5	5.725	-25.94	Pk	34.5	-35	11.8	0	-14.64	27	-41.64	271	166	H
					5.649751	-48.53	Pk	34.3	-35.08	11.8	0	-37.51	-27	-10.51	271	166	H
			5.725		-24.98	Pk	34.5	-35	11.8	0	-13.68	27	-40.68	156	123	V	
			5.650034		-48.42	Pk	34.3	-35.1	11.8	0	-37.42	-26.97	-10.45	156	123	V	
5.85			-46.57		Pk	34.8	-34.8	11.8	0	-34.77	27	-61.77	271	152	H		
5.994275			-49.84		Pk	35.2	-34.77	11.8	0	-37.61	-27	-10.61	271	152	H		
5795		5.85	-40.67		Pk	34.8	-34.8	11.8	0	-28.87	27	-55.87	155	165	V		
		5.9676	-49.67		Pk	35.1	-34.7	11.8	0	-37.47	-27	-10.47	155	165	V		
	EHT80 (SU Mode)	5775 (Lower)	6	5.6394	-47.56	Pk	35	-38.44	11.8	0	-39.2	-27	-12.2	322	141	H	
				5.725	-40.83	Pk	35.1	-38.19	11.8	0	-32.12	27	-59.12	322	141	H	
				5.63085	-48.02	Pk	35	-38.49	11.8	0	-39.71	-27	-12.71	213	115	V	
				5.725	-35.91	Pk	35.1	-38.19	11.8	0	-27.2	27	-54.2	213	115	V	
5.85				-33.86	Pk	35	-33.9	11.8	0	-20.96	27	-47.96	5	380	H		
5.924731				-50.71	Pk	35.2	-33.8	11.8	0	-37.51	-26.8	-10.71	5	380	H		
5775 (Upper)		5.85		-35.61	Pk	35	-33.9	11.8	0	-22.71	27	-49.71	40	130	V		
		5.948725		-53.66	Pk	35.2	-33.7	11.8	0	-40.36	-27	-13.36	40	130	V		
		5775 (Lower)		5	5.649284	-54.7	Pk	34.7	-23.5	11.8	0	-31.7	-27	-4.7	272	173	H
					5.725	-39.44	Pk	34.8	-23.1	11.8	0	-15.94	27	-42.94	272	173	H
			5.645567		-55.01	Pk	34.7	-23.5	11.8	0	-32.01	-27	-5.01	161	101	V	
			5.725		-38.27	Pk	34.8	-23.1	11.8	0	-14.77	27	-41.77	161	101	V	
5.85			-30.89		Pk	35.2	-34.2	11.8	0	-18.09	27	-45.09	354	251	H		
5.92445			-50.33		Pk	35.4	-34.4	11.8	0	-37.53	-26.59	-10.94	354	251	H		
5775 (Upper)		5.85	-33.63		Pk	35.2	-34.2	11.8	0	-20.83	27	-47.83	266	215	V		
		5.943525	-51.57		Pk	35.5	-34.2	11.8	0	-38.47	-27	-11.47	266	215	V		

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

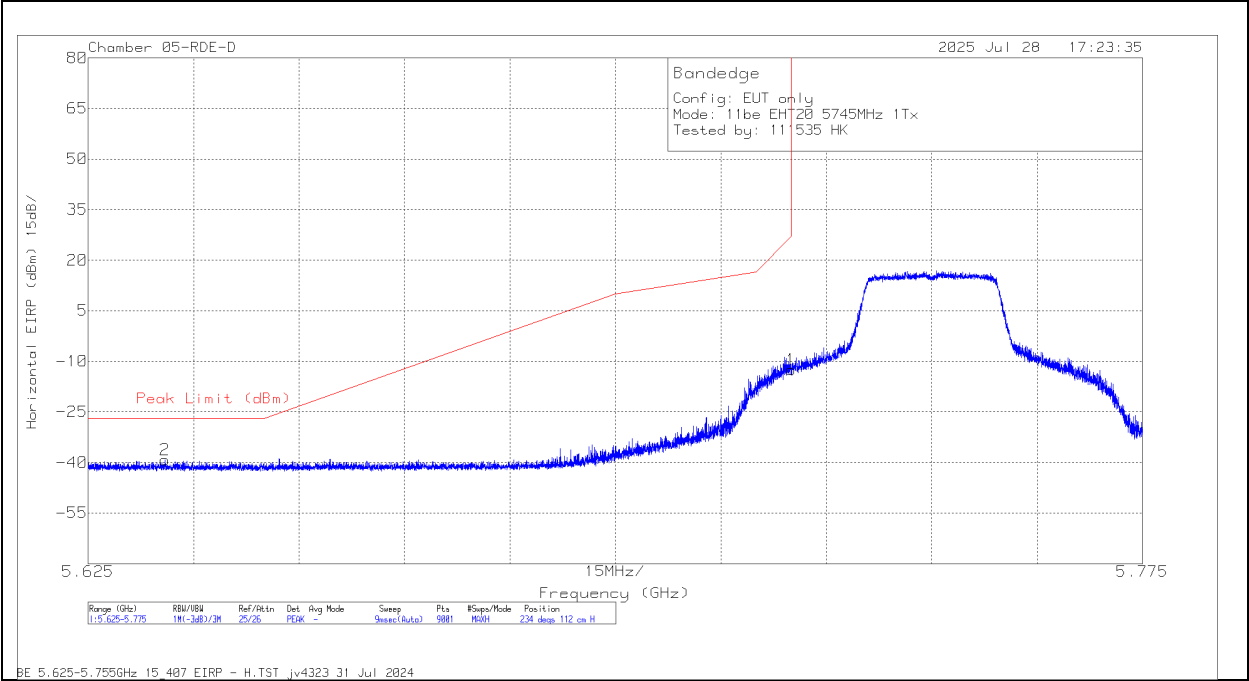


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.635967	-47.66	Pk	35	11.8	0	-38.39	-39.25	-27	-12.25	234	112	H
1	5.725	-21.18	Pk	35.1	11.8	0	-38.19	-12.47	27	-39.47	234	112	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

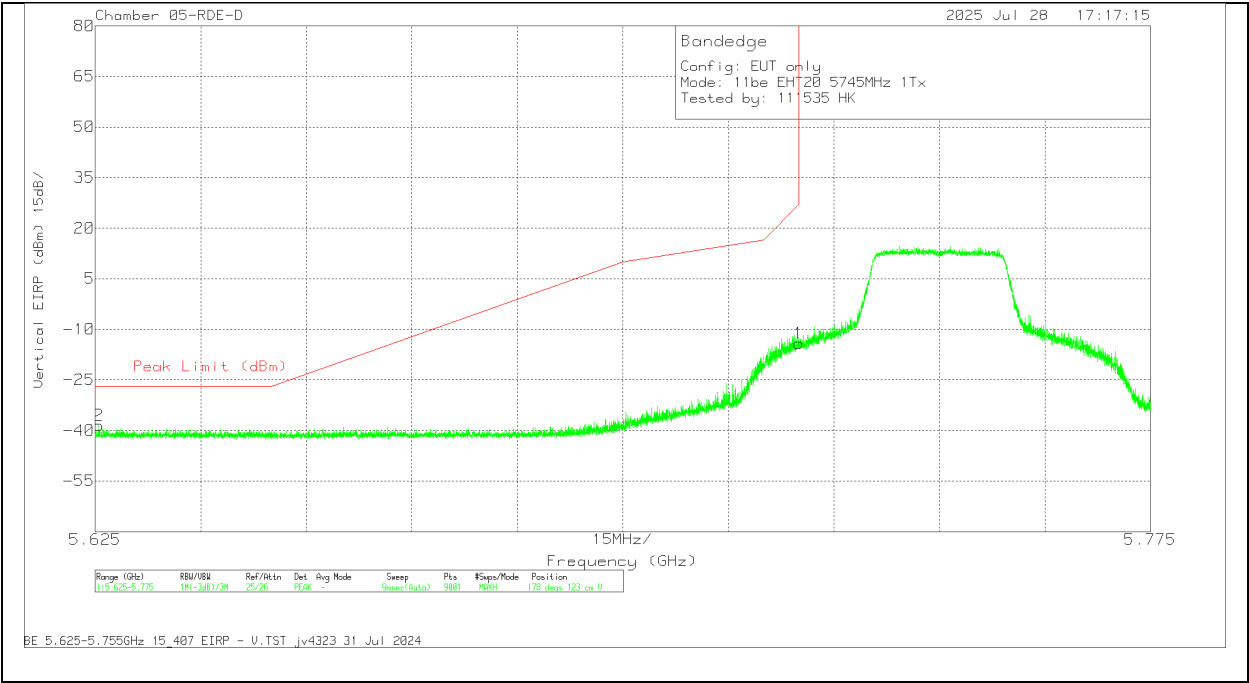


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62555	-46.78	Pk	35	11.8	0	-38.46	-38.44	-27	-11.44	178	123	V
1	5.725	-22.92	Pk	35.1	11.8	0	-38.19	-14.21	27	-41.21	178	123	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

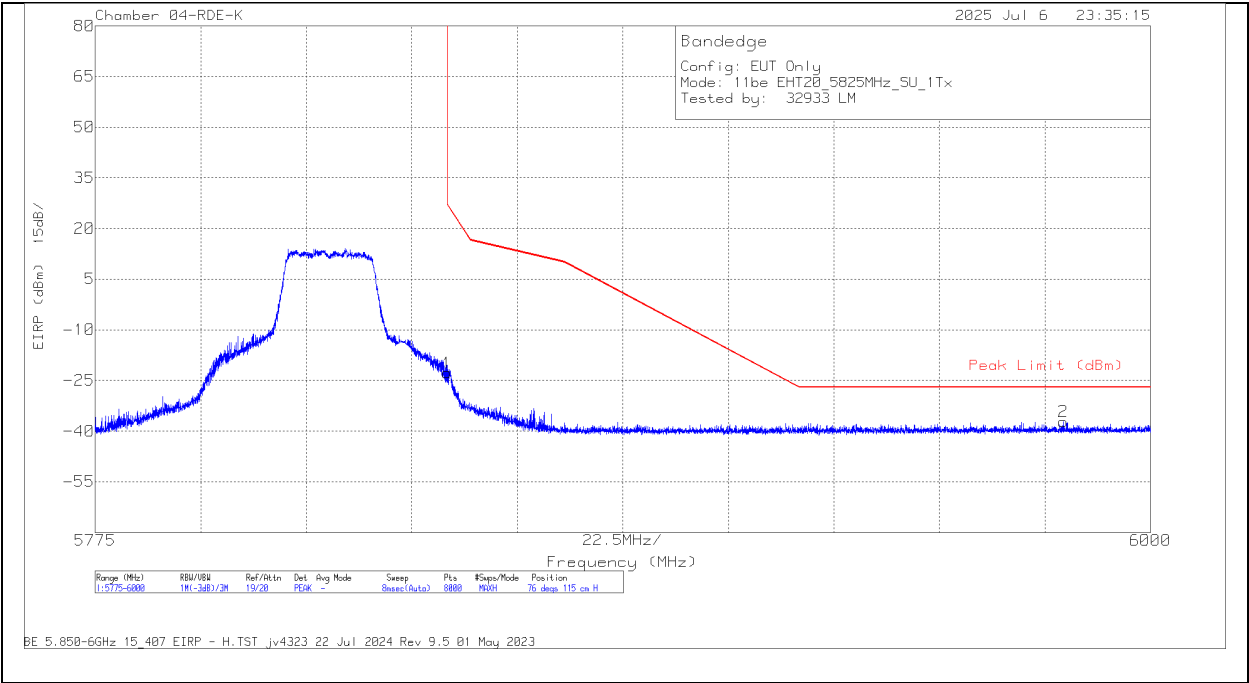


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-39.79	Pk	35	-29.8	11.8	0	-22.79	27	-49.79	76	115	H
2	5.981467	-54.62	Pk	35.2	-29.5	11.8	0	-37.12	-27	-10.12	76	115	H

Pk - Peak detector

BANDEGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

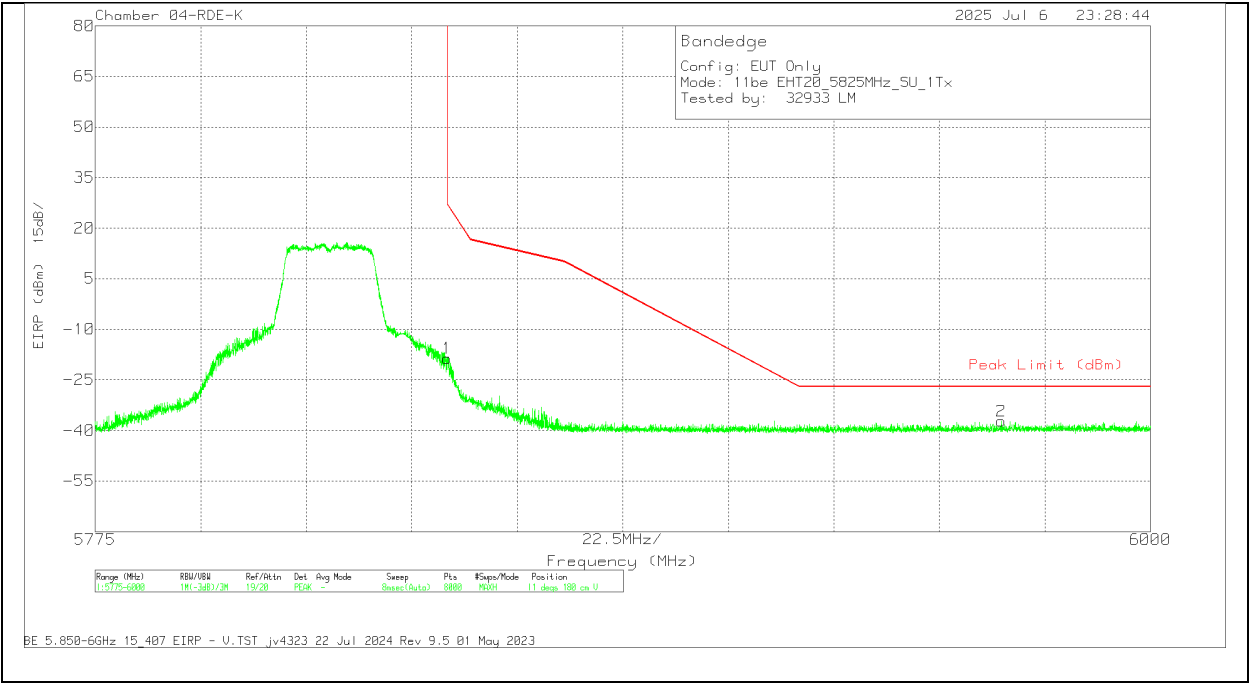

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206808 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.55	Pk	35	-29.8	11.8	0	-18.55	27	-45.55	11	180	V
2	5.968246	-54.76	Pk	35.2	-29.5	11.8	0	-37.26	-27	-10.26	11	180	V

Pk - Peak detector

1.1.28. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGES


UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T) / Index 0	5745	6	5.646517	-48.04	Pk	34.6	-36.21	11.8	0	-37.85	-27	-10.85	6	107	H
			5.725	-38.79	Pk	34.8	-36.16	11.8	0	-28.35	27	-55.35	6	107	H
			5.63405	-48.65	Pk	34.6	-36.2	11.8	0	-38.45	-27	-11.45	2	202	V
			5.725	-42.62	Pk	34.8	-36.16	11.8	0	-32.18	27	-59.18	2	202	V
			5.85	-53.07	Pk	35	-33.9	11.8	0	-40.17	27	-67.17	68	113	H
EHT20 (26T) / Index 8	5825	6	5.932185	-64.61	Pk	35.2	-33.8	11.8	0	-51.41	-27	-24.41	68	113	H
			5.85	-52.12	Pk	35	-33.9	11.8	0	-39.22	27	-66.22	41	121	V
			5.942733	-64.59	Pk	35.2	-33.8	11.8	0	-51.39	-27	-24.39	41	121	V
			5.63505	-49.14	Pk	34.6	-36.18	11.8	0	-38.92	-27	-11.92	225	204	H
			5.725	-47.58	Pk	34.8	-36.16	11.8	0	-37.14	27	-64.14	225	204	H
EHT20 (26T) / Index 0	5745	5	5.6442	-49.19	Pk	34.6	-36.23	11.8	0	-39.02	-27	-12.02	347	146	V
			5.725	-47.45	Pk	34.8	-36.16	11.8	0	-37.01	27	-64.01	347	146	V
			5.85	-54.3	Pk	35	-33.9	11.8	0	-41.4	27	-68.4	193	219	H
			5.987937	-65.02	Pk	35.3	-33.8	11.8	0	-51.72	-27	-24.72	193	219	H
			5.85	-48.03	Pk	35	-33.9	11.8	0	-35.13	27	-62.13	75	151	V
EHT20 (26T) / Index 8	5825	5	5.958739	-64.37	Pk	35.3	-33.7	11.8	0	-50.97	-27	-23.97	75	151	V
			5.633717	-64.51	Pk	34.7	-22.86	11.8	0	-40.87	-27	-13.87	78	148	H
			5.725	-53.33	Pk	34.7	-22.81	11.8	0	-29.64	27	-56.64	78	148	H
			5.6466	-64.02	Pk	34.7	-22.91	11.8	0	-40.43	-27	-13.43	20	211	V
			5.725	-55.65	Pk	34.7	-22.81	11.8	0	-31.96	27	-58.96	20	211	V
EHT40 (106T) / Index 53	5755	6	5.85	-67	Pk	35	-22.61	11.8	0	-42.81	27	-69.81	84	236	H
			5.927525	-64.51	Pk	35.3	-22.8	11.8	0	-40.21	-27	-13.21	84	236	H
			5.85	-66.58	Pk	35	-22.61	11.8	0	-42.39	27	-69.39	33	239	V
			5.973475	-64.35	Pk	35.3	-22.79	11.8	0	-40.04	-27	-13.04	33	239	V
			5.626133	-47.13	Pk	35	-38.47	11.8	0	-38.8	-27	-11.8	324	170	H
EHT40 (106T) / Index 53	5755	5	5.725	-39.34	Pk	35.1	-38.19	11.8	0	-30.63	27	-57.63	324	170	H
			5.629983	-47.41	Pk	35	-38.52	11.8	0	-39.13	-27	-12.13	207	114	V
			5.725	-36.71	Pk	35.1	-38.19	11.8	0	-28	27	-55	207	114	V
			5.85	-49.99	Pk	35.1	-37.78	11.8	0	-40.87	27	-67.87	321	148	H
			5.9603	-48.23	Pk	35.3	-37.52	11.8	0	-38.65	-27	-11.65	321	148	H
EHT40 (106T) / Index 56	5795	5	5.85	-49.43	Pk	35.1	-37.78	11.8	0	-40.31	27	-67.31	218	104	V
			5.95145	-47.77	Pk	35.3	-37.55	11.8	0	-38.22	-27	-11.22	218	104	V
			5.649717	-63.6	Pk	34.7	-22.97	11.8	0	-40.07	-27	-13.07	51	190	H
			5.725	-43.09	Pk	34.7	-22.81	11.8	0	-19.4	27	-46.4	51	190	H
			5.6468	-64.48	Pk	34.7	-22.94	11.8	0	-40.92	-27	-13.92	11	148	V
EHT80 (484T) / Index 65	5775 (Lower)	6	5.725	-43.03	Pk	34.7	-22.81	11.8	0	-19.34	27	-46.34	11	148	V
			5.85	-60.93	Pk	35	-22.61	11.8	0	-36.74	27	-63.74	48	150	H
			5.970675	-64.81	Pk	35.3	-22.73	11.8	0	-40.44	-27	-13.44	48	150	H
			5.85	-62.01	Pk	35	-22.61	11.8	0	-37.82	27	-64.82	348	229	V
			5.94205	-64.4	Pk	35.3	-22.51	11.8	0	-39.81	-27	-12.81	348	229	V
EHT80 (484T) / Index 66	5775 (Upper)	6	5.6282	-49.04	Pk	34.7	-35.4	11.8	0	-37.94	-27	-10.94	81	231	H
			5.725	-38.35	Pk	34.7	-35.3	11.8	0	-27.15	27	-54.15	81	231	H
			5.646634	-49.39	Pk	34.7	-35.32	11.8	0	-38.21	-27	-11.21	69	295	V
			5.725	-42.51	Pk	34.7	-35.3	11.8	0	-31.31	27	-58.31	69	295	V
			5.85	-50.04	Pk	35	-34.97	11.8	0	-38.21	27	-65.21	138	177	H
EHT80 (484T) / Index 66	5775 (Upper)	5	5.99115	-48.84	Pk	35.3	-34.75	11.8	0	-36.49	-27	-9.49	138	177	H
			5.85	-62.23	Pk	35	-22.61	11.8	0	-38.04	27	-65.04	52	133	V
			5.997275	-64.06	Pk	35.3	-22.95	11.8	0	-39.91	-27	-12.91	52	133	V
			5.639117	-64.51	Pk	34.7	-22.79	11.8	0	-40.8	-27	-13.8	57	224	H
			5.725	-52.88	Pk	34.7	-22.81	11.8	0	-29.19	27	-56.19	57	224	H
EHT80 (106T) / Index 53	5775 (Lower)	6	5.630917	-64.03	Pk	34.7	-23	11.8	0	-40.53	-27	-13.53	12	308	V
			5.725	-56.22	Pk	34.7	-22.81	11.8	0	-32.53	27	-59.53	12	308	V
			5.85	-66.56	Pk	35	-22.61	11.8	0	-42.37	27	-69.37	76	162	H
			5.93905	-64.78	Pk	35.3	-22.69	11.8	0	-40.37	-27	-13.37	76	162	H
			5.85	-66.76	Pk	35	-22.61	11.8	0	-42.57	27	-69.57	9	123	V
EHT80 (106T) / Index 60	5775 (Upper)	6	5.992	-64.44	Pk	35.3	-22.78	11.8	0	-40.12	-27	-13.12	9	123	V
			5.632517	-48.72	Pk	34.7	-35.2	11.8	0	-37.42	-27	-10.42	78	288	H
			5.725	-48.72	Pk	34.7	-35.3	11.8	0	-37.52	27	-64.52	78	288	H
			5.632483	-48.94	Pk	34.7	-35.2	11.8	0	-37.64	-27	-10.64	38	355	V
			5.725	-49.84	Pk	34.7	-35.3	11.8	0	-38.64	27	-65.64	38	355	V
EHT80 (106T) / Index 53	5775 (Lower)	5	5.85	-66.81	Pk	35	-22.61	11.8	0	-42.62	27	-69.62	134	119	H
			5.973325	-64.72	Pk	35.3	-22.77	11.8	0	-40.39	-27	-13.39	134	119	H
			5.85	-67.51	Pk	35	-22.61	11.8	0	-43.32	27	-70.32	37	105	V
			5.936175	-64.62	Pk	35.3	-22.79	11.8	0	-40.31	-27	-13.31	37	105	V
			5.936175	-64.62	Pk	35.3	-22.79	11.8	0	-40.31	-27	-13.31	37	105	V

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

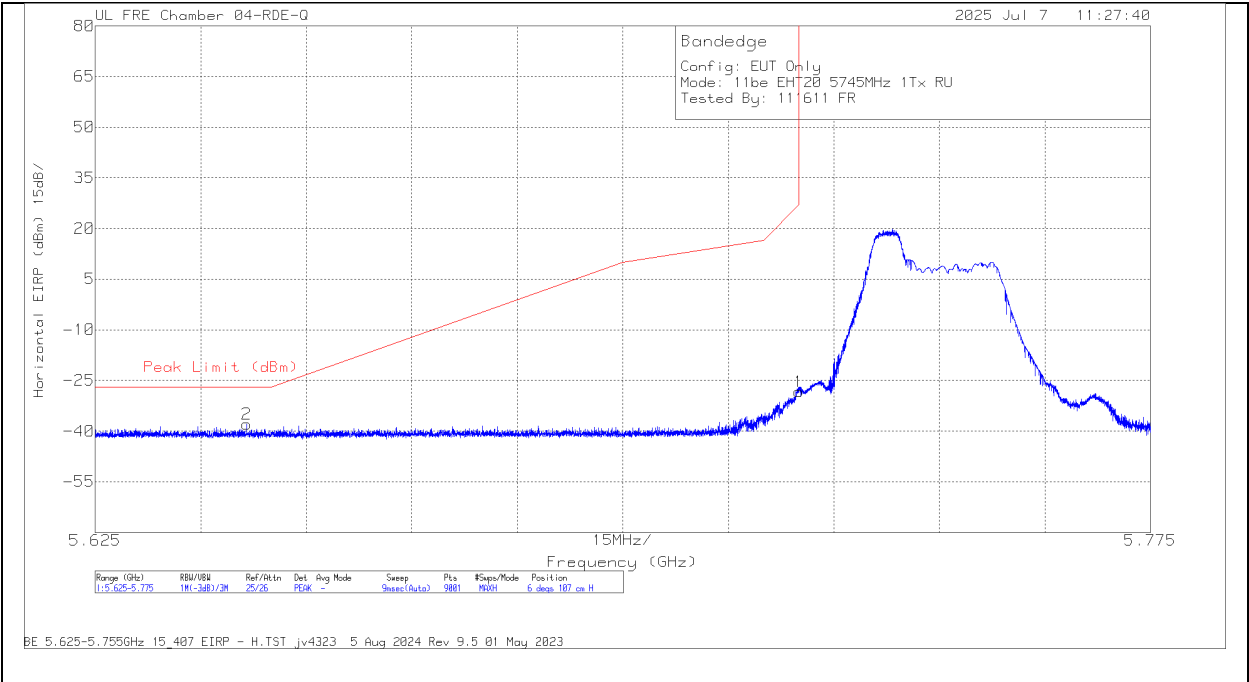


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646517	-48.04	Pk	34.6	11.8	-36.21	-37.85	-27	-10.85	6	107	H
1	5.725	-38.79	Pk	34.8	11.8	-36.16	-28.35	27	-55.35	6	107	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26


BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

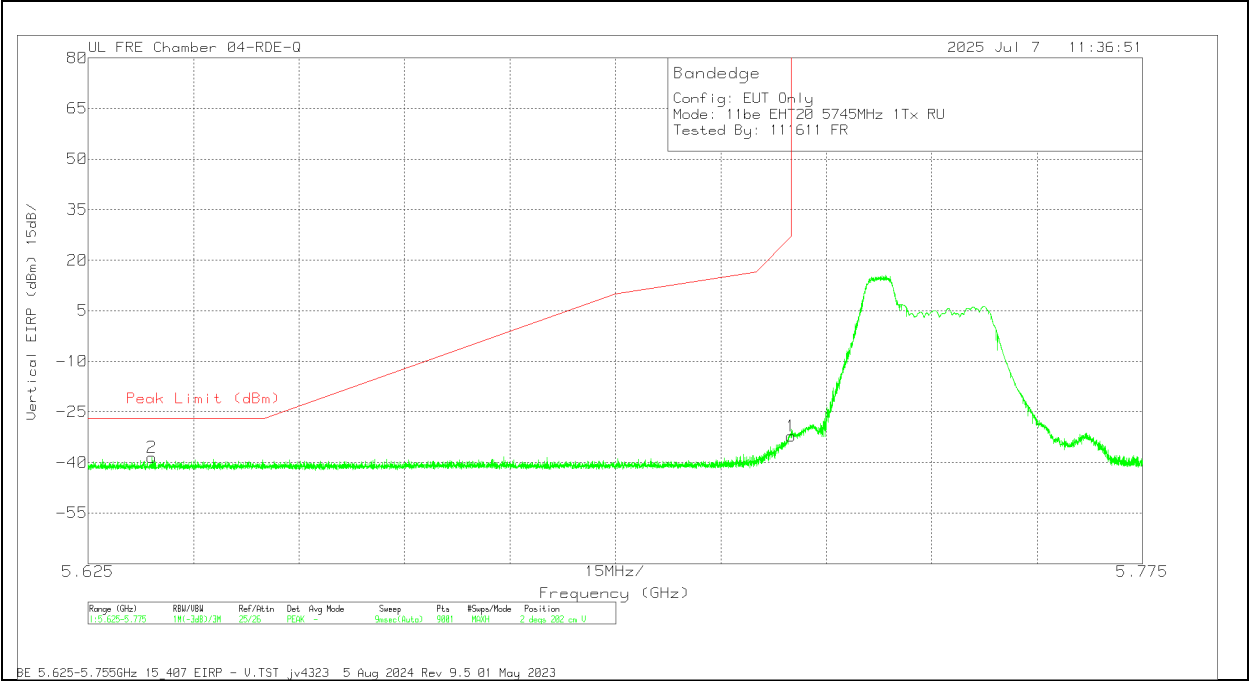

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63405	-48.65	Pk	34.6	11.8	-36.2	-38.45	-27	-11.45	2	202	V
1	5.725	-42.62	Pk	34.8	11.8	-36.16	-32.18	27	-59.18	2	202	V

Pk - Peak detector

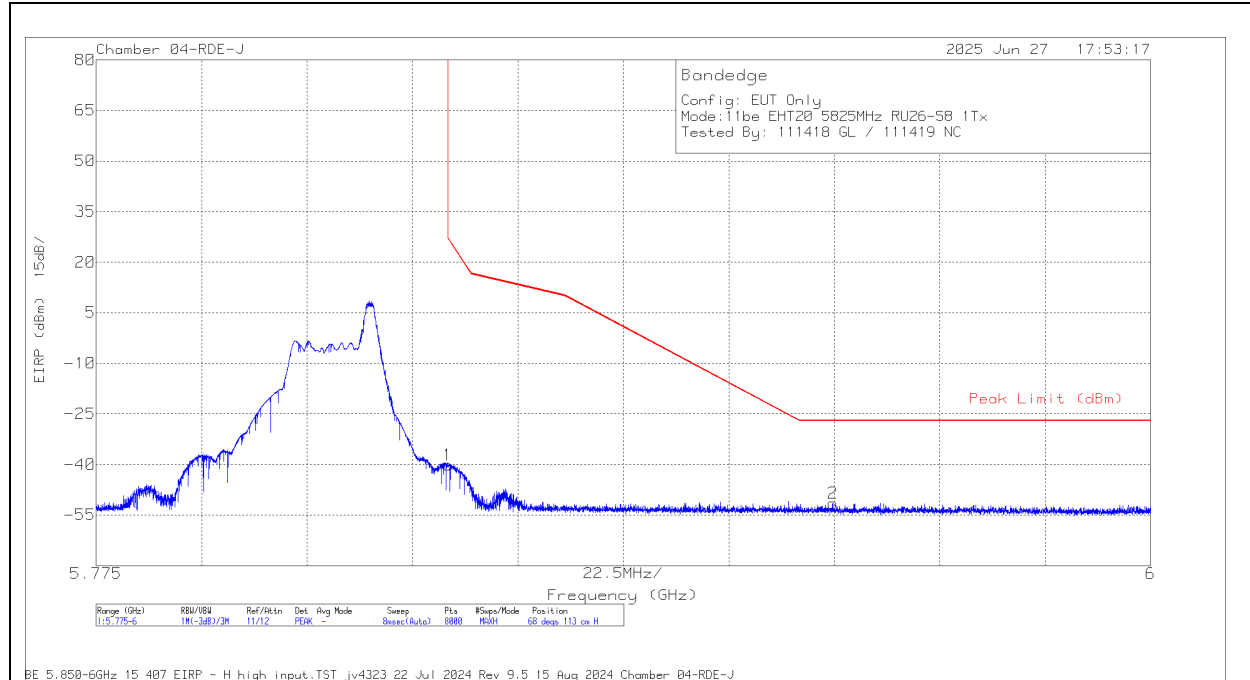1TX Antenna 6 MODE: PARTIAL RU, 26**BANDEDGE (HIGH CHANNEL / 5825MHz)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.07	Pk	35	-33.9	11.8	0	-40.17	27	-67.17	68	113	H
2	5.932185	-64.61	Pk	35.2	-33.8	11.8	0	-51.41	-27	-24.41	68	113	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

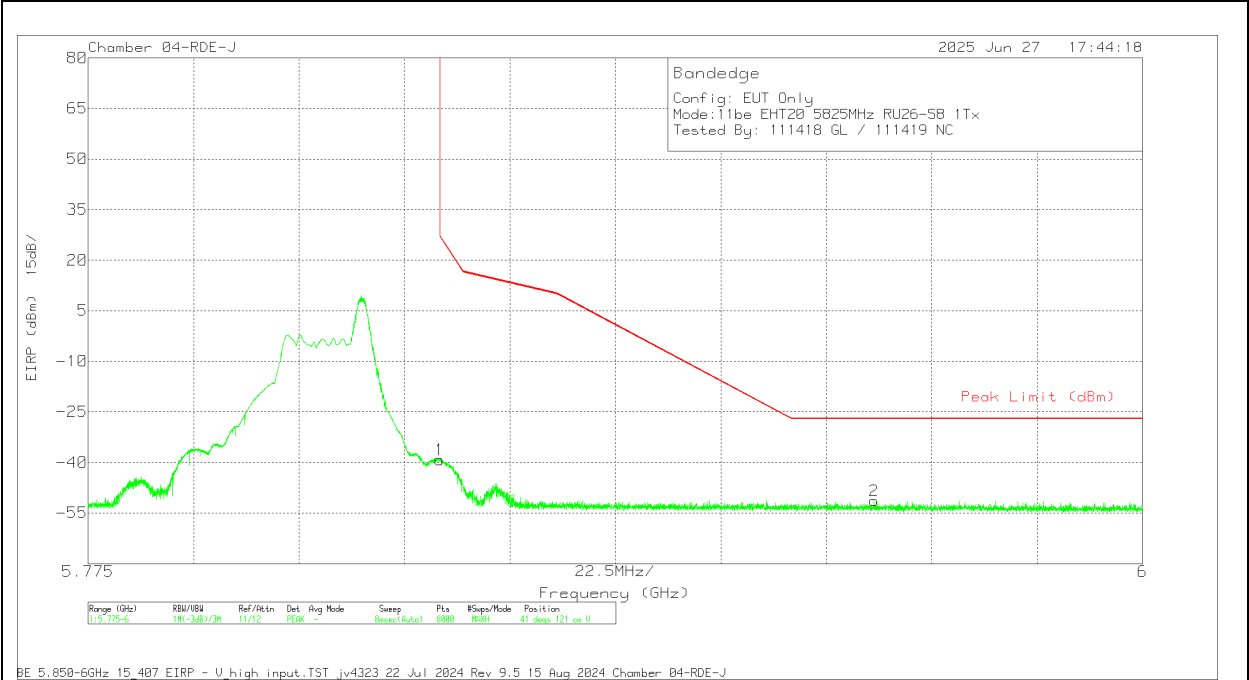

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.12	Pk	35	-33.9	11.8	0	-39.22	27	-66.22	41	121	V
2	5.942733	-64.59	Pk	35.2	-33.8	11.8	0	-51.39	-27	-24.39	41	121	V

Pk - Peak detector

1.1.29. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGES


UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5745	6 + 5	5.637826	-66.06	Pk	34.3	-17.5	11.8	0	-37.46	-27	-10.46	44	159	H
			5.725	-45.1	Pk	34.5	-17.4	11.8	0	-16.2	27	-43.2	44	159	H
			5.639702	-64.56	Pk	34.3	-17.5	11.8	0	-35.96	-27	-8.96	296	116	V
			5.725	-40.95	Pk	34.5	-17.4	11.8	0	-12.05	27	-39.05	296	116	V
	5825		5.85	-57.07	Pk	34.9	-16.4	11.8	0	-26.77	27	-53.77	232	121	H
			5.978879	-66.28	Pk	35.2	-16.4	11.8	0	-35.68	-27	-8.68	232	121	H
			5.85	-47.95	Pk	34.9	-16.4	11.8	0	-17.65	27	-44.65	286	103	V
				5.949344	-66.32	Pk	35.2	-16.3	11.8	0	-35.62	-27	-8.62	286	103
EHT40 (SU Mode)	5755	6 + 5	5.643133	-62.38	Pk	34.3	-17.5	11.8	0	-33.78	-27	-6.78	162	280	H
			5.725	-43.96	Pk	34.5	-17.4	11.8	0	-15.06	27	-42.06	162	280	H
			5.639064	-66.19	Pk	34.3	-17.5	11.8	0	-37.59	-27	-10.59	286	114	V
			5.725	-65.04	Pk	34.5	-17.4	11.8	0	-36.14	27	-63.14	286	114	V
	5795		5.85	-65.12	Pk	34.9	-16.4	11.8	0	-34.82	27	-61.82	158	104	H
			5.988049	-66.12	Pk	35.2	-16.4	11.8	0	-35.52	-27	-8.52	158	104	H
			5.85	-64.87	Pk	34.9	-16.4	11.8	0	-34.57	27	-61.57	81	140	V
				5.941102	-66.89	Pk	35.1	-16.2	11.8	0	-36.19	-27	-9.19	81	140
EHT80 (SU Mode)	5775 (Lower)	6 + 5	5.651401	-40.74	Pk	35	-38.42	11.8	0	-32.36	-25.96	-6.4	317	128	H
			5.725	-28.87	Pk	35.1	-38.19	11.8	0	-20.16	27	-47.16	317	128	H
			5.651684	-38.68	Pk	35	-38.45	11.8	0	-30.33	-25.75	-4.58	219	136	V
			5.725	-24.43	Pk	35.1	-38.19	11.8	0	-15.72	27	-42.72	219	136	V
	5775 (Upper)		5.85	-27.38	Pk	35.2	-34.2	11.8	0	-14.58	27	-41.58	353	246	H
			5.924575	-47.99	Pk	35.4	-34.4	11.8	0	-35.19	-26.69	-8.5	353	246	H
			5.85	-27.45	Pk	35.2	-34.2	11.8	0	-14.65	27	-41.65	261	207	V
			5.92575	-49.48	Pk	35.4	-34.2	11.8	0	-36.48	-27	-9.48	261	207	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User


BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

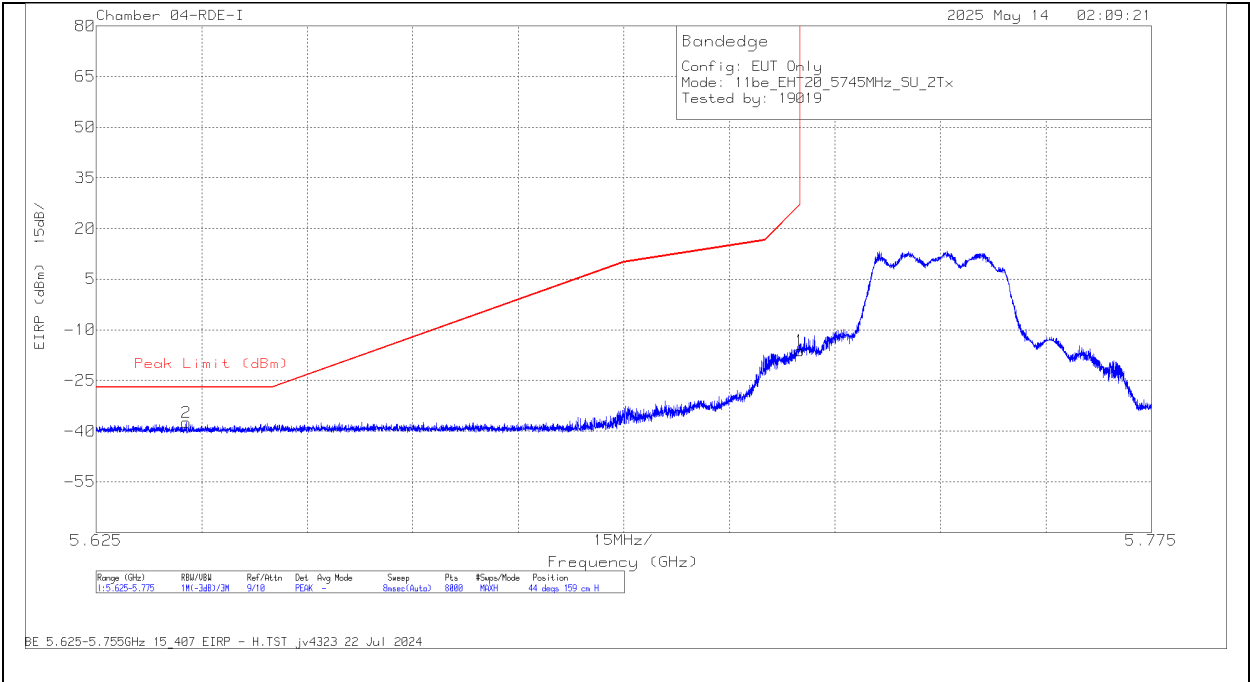

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.637826	-66.06	PK	34.3	-17.5	11.8	0	-37.46	-27	-10.46	44	159	H
1	5.725	-45.1	PK	34.5	-17.4	11.8	0	-16.2	27	-43.2	44	159	H

Pk - Peak detector

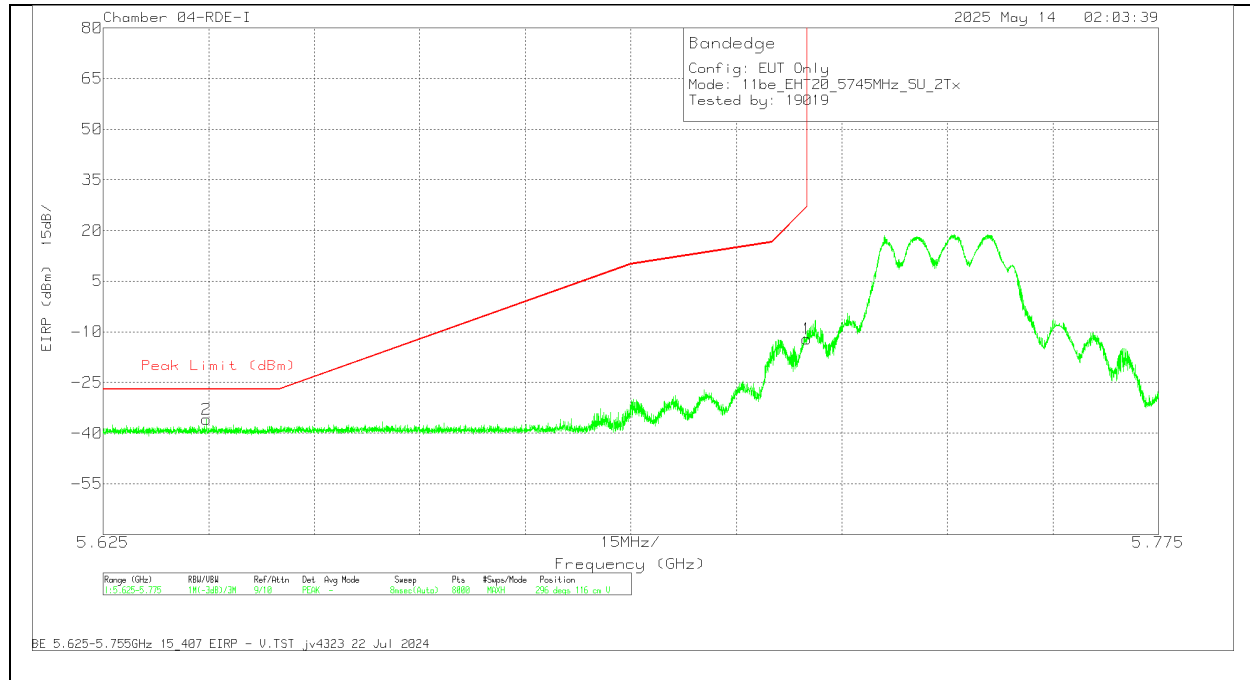
2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User**BANDEDGE (LOW CHANNEL / 5745MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.639702	-64.56	Pk	34.3	-17.5	11.8	0	-35.96	-27	-8.96	296	116	V
1	5.725	-40.95	Pk	34.5	-17.4	11.8	0	-12.05	27	-39.05	296	116	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)


HORIZONTAL RESULT

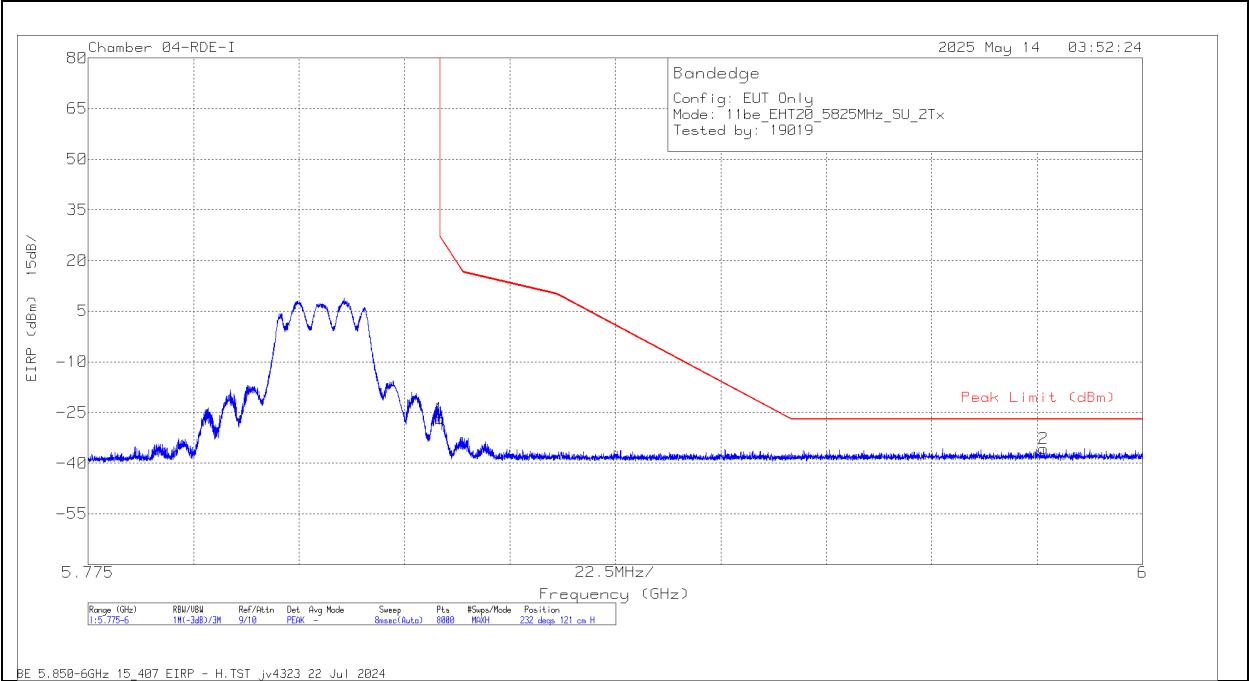

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

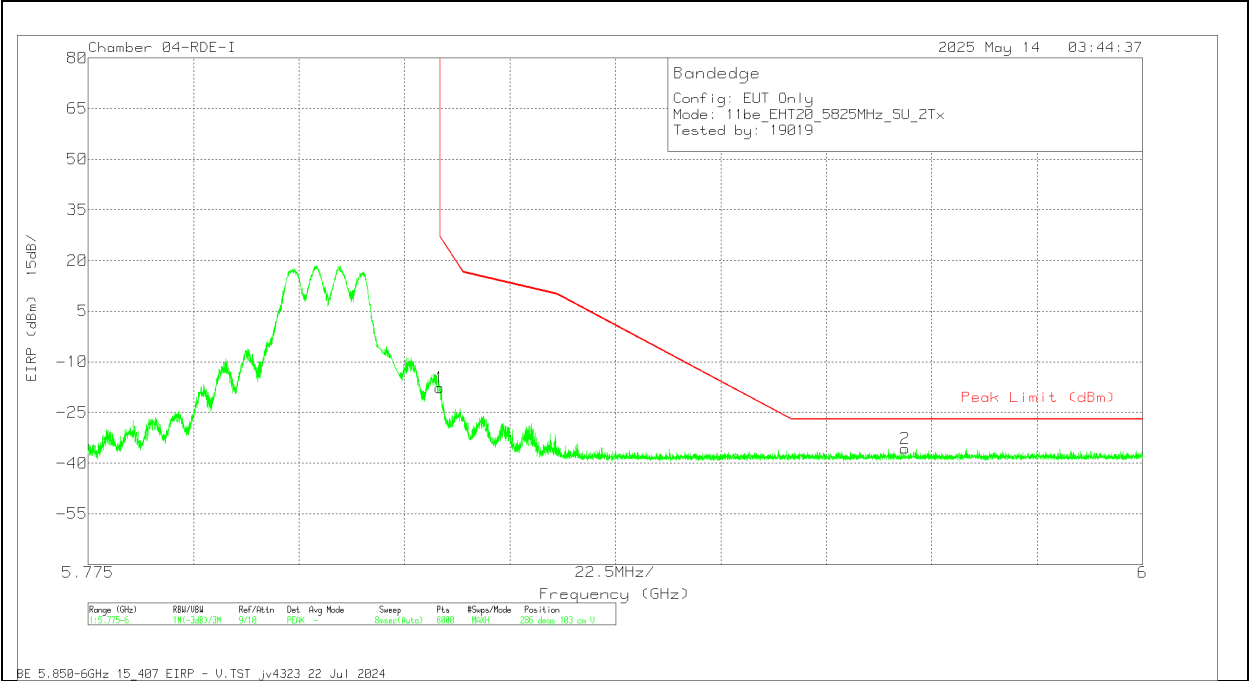

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.95	Pk	34.9	-16.4	11.8	0	-17.65	-27	-44.65	286	103	V
2	5.949344	-66.32	Pk	35.2	-16.3	11.8	0	-35.62	-27	-8.62	286	103	V

Pk - Peak detector

1.1.30. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGES


UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T) / Index 0	5745	6 + 5	5.641934	-49	Pk	34.6	-36.29	11.8	0	-38.89	-27	-11.89	40	248	H
	5.725		-49.34	Pk	34.8	-36.16	11.8	0	-38.9	27	-65.9	40	248	H	
	5.648834		-48.83	Pk	34.6	-36.21	11.8	0	-38.64	-27	-11.64	314	317	V	
	5.725		-47.31	Pk	34.8	-36.16	11.8	0	-36.87	27	-63.87	314	317	V	
EHT20 (26T) / Index 8	5825		5.85	-52.71	Pk	35	-33.9	11.8	0	-39.81	27	-66.81	115	120	H
	5.958907		-64.4	Pk	35.3	-33.7	11.8	0	-51	-27	-24	115	120	H	
		5.85	-60.21	Pk	35	-33.9	11.8	0	-47.31	27	-74.31	30	155	V	
		5.944505	-64.24	Pk	35.2	-33.7	11.8	0	-50.94	-27	-23.94	30	155	V	
EHT40 (106T) / Index 53	5755	6 + 5	5.645684	-64.76	Pk	34.7	-22.81	11.8	0	-41.07	-27	-14.07	72	231	H
	5.725		-53.12	Pk	34.7	-22.81	11.8	0	-29.43	27	-56.43	72	231	H	
	5.63035		-64.44	Pk	34.7	-22.97	11.8	0	-40.91	-27	-13.91	355	133	V	
	5.725		-55.87	Pk	34.7	-22.81	11.8	0	-32.18	27	-59.18	355	133	V	
EHT40 (106T) / Index 56	5795		5.85	-66.69	Pk	35	-22.61	11.8	0	-42.5	27	-69.5	70	118	H
	5.9842		-64.4	Pk	35.3	-22.72	11.8	0	-40.02	-27	-13.02	70	118	H	
		5.85	-66.41	Pk	35	-22.61	11.8	0	-42.22	27	-69.22	8	115	V	
		5.99375	-64.36	Pk	35.3	-22.91	11.8	0	-40.17	-27	-13.17	8	115	V	
EHT80 (484T / Index 65)	5775 (Lower)	6 + 5	5.64115	-49.29	Pk	34.5	-36.67	11.8	0	-39.66	-27	-12.66	96	171	H
	5.725		-28.93	Pk	34.6	-36.2	11.8	0	-18.73	27	-45.73	96	171	H	
	5.6269		-49.69	Pk	34.4	-36.59	11.8	0	-40.08	-27	-13.08	66	150	V	
	5.725		-31.09	Pk	34.6	-36.2	11.8	0	-20.89	27	-47.89	66	150	V	
EHT80 (484T / Index 66)	5775 (Upper)		5.85	-49.15	Pk	35	-35.7	11.8	0	-38.05	27	-65.05	121	219	H
	5.9745		-50.67	Pk	35.2	-35.85	11.8	0	-39.52	-27	-12.52	121	219	H	
		5.85	-45.02	Pk	35	-35.7	11.8	0	-33.92	27	-60.92	46	217	V	
		5.966725	-49.95	Pk	35.2	-35.75	11.8	0	-38.7	-27	-11.7	46	217	V	
EHT80 (106T / Index 53)	5775 (Lower)	6 + 5	5.632133	-50.17	Pk	34.4	-36.49	11.8	0	-40.46	-27	-13.46	96	171	H
	5.725		-39.44	Pk	34.6	-36.2	11.8	0	-29.24	27	-56.24	96	171	H	
	5.635884		-50	Pk	34.4	-36.25	11.8	0	-40.05	-27	-13.05	66	150	V	
	5.725		-40.33	Pk	34.6	-36.2	11.8	0	-30.13	27	-57.13	66	150	V	
EHT80 (106T / Index 60)	5775 (Upper)		5.85	-52.12	Pk	35	-35.7	11.8	0	-41.02	27	-68.02	121	219	H
	5.969025		-50.07	Pk	35.2	-35.6	11.8	0	-38.67	-27	-11.67	121	219	H	
		5.85	-53.67	Pk	35	-35.7	11.8	0	-42.57	27	-69.57	46	217	V	
		5.988675	-50.33	Pk	35.3	-35.93	11.8	0	-39.16	-27	-12.16	46	217	V	

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

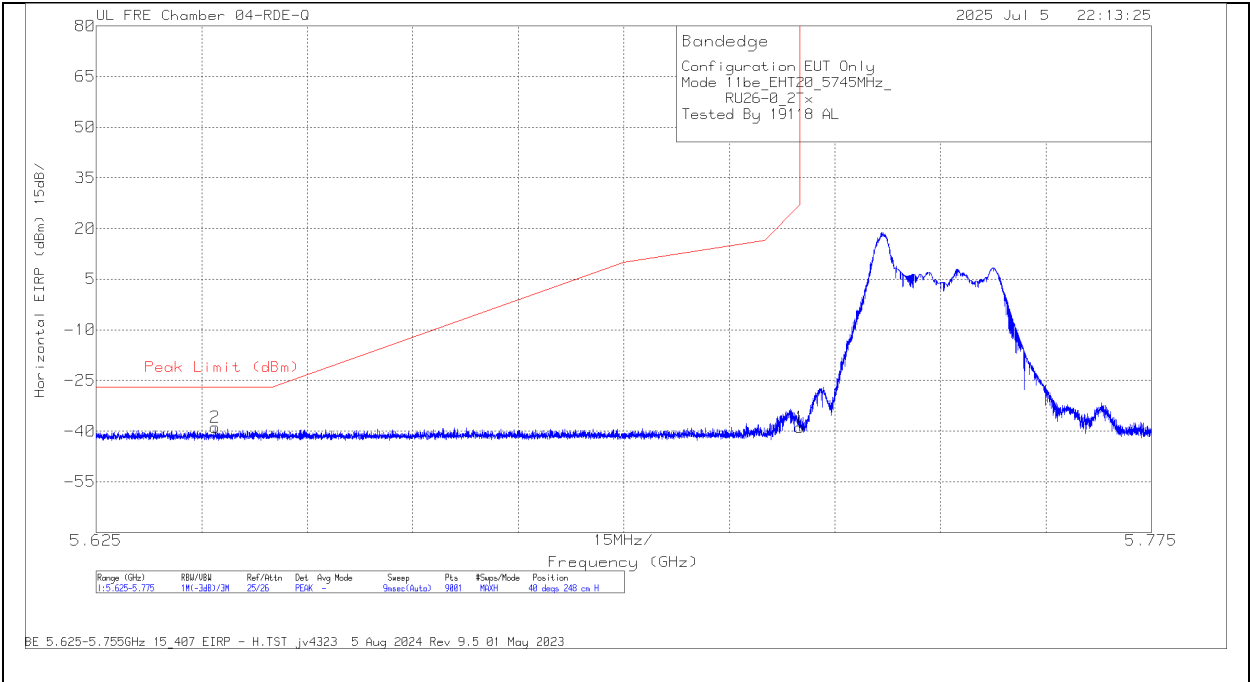


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.641934	-49	Pk	34.6	11.8	0	-36.29	-38.89	-27	-11.89	40	248	H
1	5.725	-49.34	Pk	34.8	11.8	0	-36.16	-38.9	27	-65.9	40	248	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

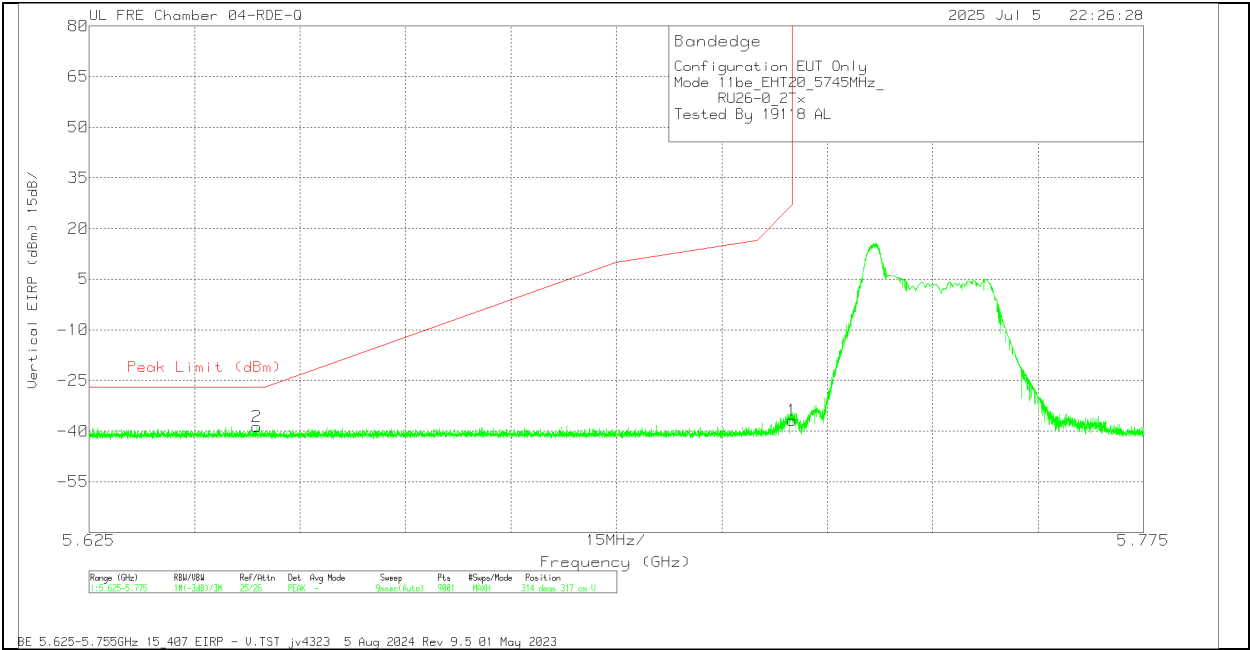


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648834	-48.83	Pk	34.6	11.8	0	-36.21	-38.64	-27	-11.64	314	317	V
1	5.725	-47.31	Pk	34.8	11.8	0	-36.16	-36.87	27	-63.87	314	317	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

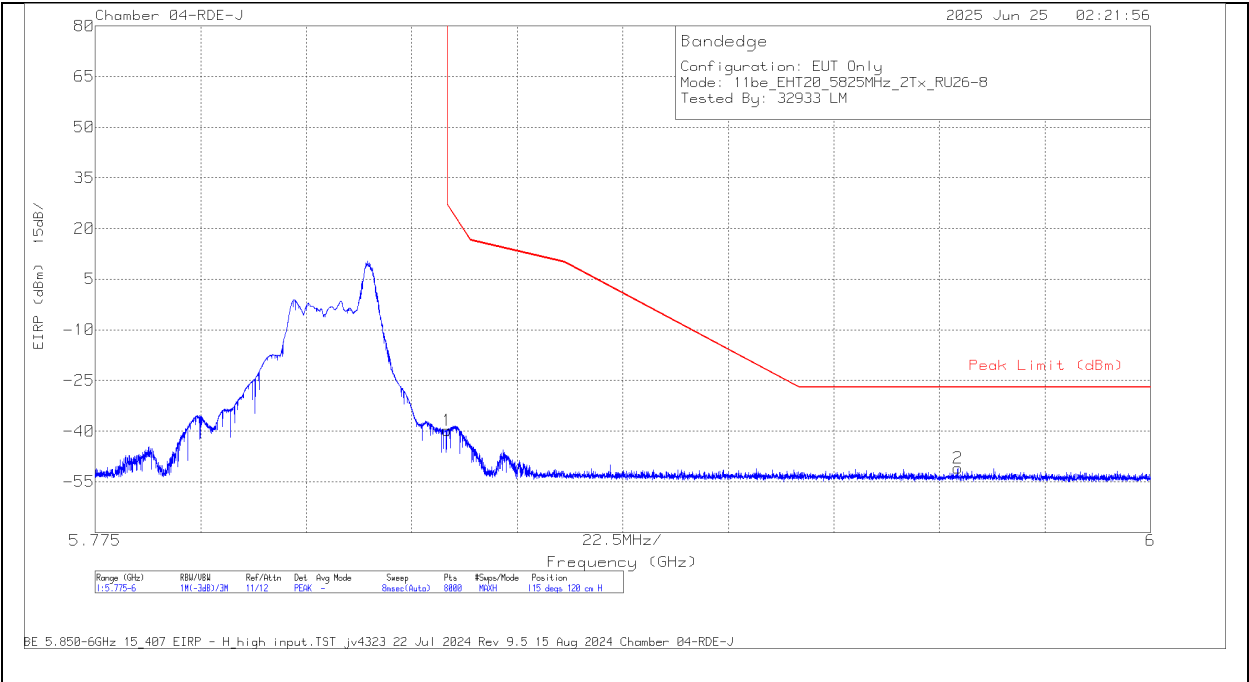


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.71	Pk	35	-33.9	11.8	0	-39.81	27	-66.81	115	120	H
2	5.958907	-64.4	Pk	35.3	-33.7	11.8	0	-51	-27	-24	115	120	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

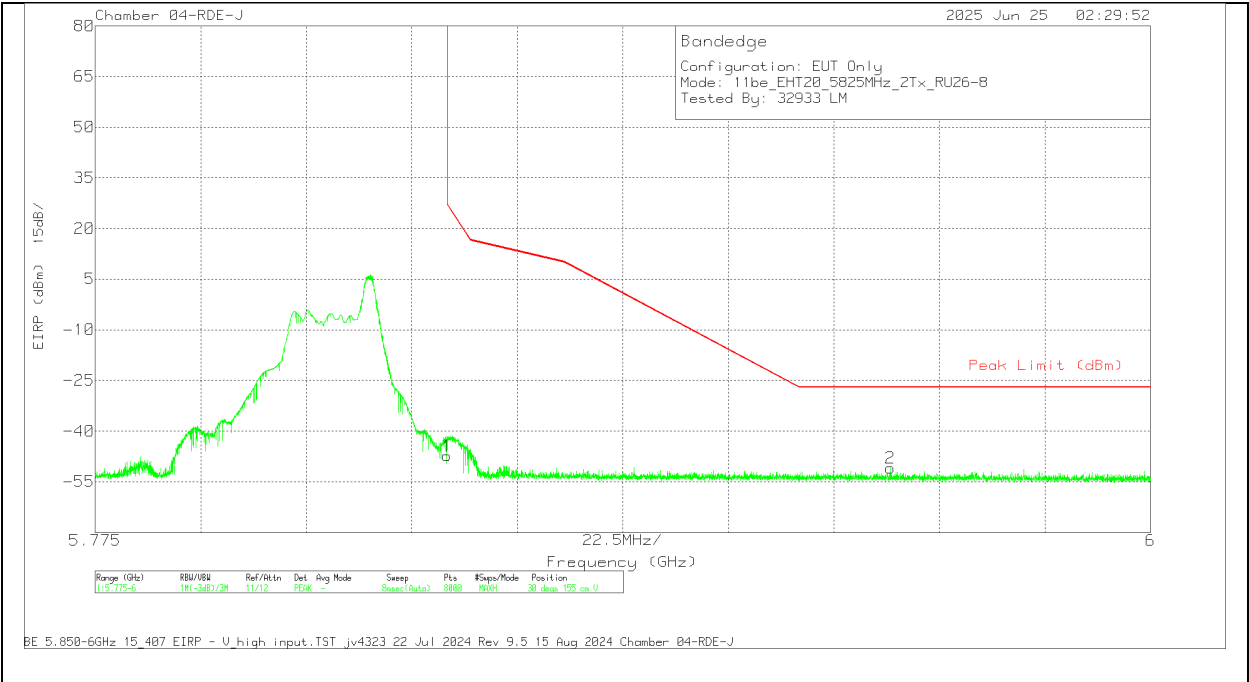

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.21	Pk	35	-33.9	11.8	0	-47.31	27	-74.31	30	155	V
2	5.944505	-64.24	Pk	35.2	-33.7	11.8	0	-50.94	-27	-23.94	30	155	V

Pk - Peak detector

1.1.31. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5745	6 + 5	* 12.440308	51.99	PK-U	39	-39.6	0	51.39	-	-	74	-22.61	166	252	H
			* 12.441882	40.52	ADR	39	-39.5	0	40.02	54	-13.98	-	-	166	252	H
			* 12.443523	52.32	PK-U	39	-39.5	0	51.82	-	-	74	-22.18	352	296	V
			* 12.446536	40.7	ADR	39	-39.4	0	40.3	54	-13.7	-	-	352	296	V
			* 1.32925	60.57	PK-U	28.8	-48.9	0	40.47	-	-	74	-33.53	288	117	V
			* 1.329818	49.23	ADR	28.8	-48.9	0	29.13	54	-24.87	-	-	161	151	H
			* 1.330227	60.73	PK-U	28.8	-48.9	0	40.63	-	-	74	-33.37	161	151	H
			* 1.330237	49.48	ADR	28.8	-48.9	0	29.38	54	-24.62	-	-	288	117	V
			* 3.869147	55.97	PK-U	33.5	-45.4	0	44.07	-	-	74	-29.93	263	284	H
			* 3.869721	44.23	ADR	33.5	-45.5	0	32.23	54	-21.77	-	-	209	249	V
			* 3.876481	56.13	PK-U	33.5	-45.3	0	44.33	-	-	74	-29.67	209	249	V
			* 3.876681	44.35	ADR	33.5	-45.3	0	32.55	54	-21.45	-	-	263	284	H
	5785	6 + 5	* 1.212805	49.35	ADR	28.8	-48.8	0	29.35	54	-24.65	-	-	293	333	V
			* 1.212832	49.37	ADR	28.8	-48.8	0	29.37	54	-24.63	-	-	303	225	H
			* 1.213298	60.95	PK-U	28.8	-48.8	0	40.95	-	-	74	-33.05	293	333	V
			* 1.215518	60.32	PK-U	28.8	-48.8	0	40.32	-	-	74	-33.68	303	225	H
			* 4.15133	56.36	PK-U	33.4	-45.9	0	43.86	-	-	74	-30.14	177	273	V
			* 4.151903	56.07	PK-U	33.4	-46	0	43.47	-	-	74	-30.53	88	346	H
			* 4.16375	44.72	ADR	33.4	-46	0	32.12	54	-21.88	-	-	177	273	V
			* 4.165283	44.84	ADR	33.4	-45.9	0	32.34	54	-21.66	-	-	88	346	H
			16.397641	51.82	PK-U	41.2	-38.4	0	54.62	-	-	68.2	-13.58	232	162	H
			16.406601	51.82	PK-U	41.2	-38.4	0	54.62	-	-	68.2	-13.58	320	134	V
	5825	6 + 5	* 11.574051	52.6	PK-U	38.2	-40.2	0	50.6	-	-	74	-23.4	218	298	V
			* 11.581091	40.66	ADR	38.3	-40.1	0	38.86	54	-15.14	-	-	218	298	V
			* 11.586278	40.66	ADR	38.3	-40.2	0	38.76	54	-15.24	-	-	301	111	H
			* 11.592793	51.73	PK-U	38.3	-40.3	0	49.73	-	-	74	-24.27	301	111	H
			* 1.209606	61.72	PK-U	28.7	-48.9	0	41.52	-	-	74	-32.48	188	261	V
			* 1.209799	49.47	ADR	28.7	-48.8	0	29.37	54	-24.63	-	-	188	261	V
			* 1.211405	60.75	PK-U	28.8	-48.9	0	40.65	-	-	74	-33.35	257	156	H
			* 1.214125	49.24	ADR	28.8	-48.8	0	29.24	54	-24.76	-	-	257	156	H
			* 4.703714	56.26	PK-U	34.1	-45.4	0	44.96	-	-	74	-29.04	145	226	H
			* 4.703794	56.57	PK-U	34.1	-45.5	0	45.17	-	-	74	-28.83	89	244	V
			* 4.705701	44.74	ADR	34	-45.5	0	33.24	54	-20.76	-	-	89	244	V
			* 4.707561	45.05	ADR	34	-45.5	0	33.55	54	-20.45	-	-	145	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5755	6 + 5	* 3.859745	58.1	PK-U	33.3	-47.8	0	43.6	-	-	74	-30.4	68	336	H
			* 3.857719	45.9	ADR	33.3	-47.8	0	31.4	54	-22.6	-	-	68	336	H
			* 3.860464	58.11	PK-U	33.3	-47.8	0	43.61	-	-	74	-30.39	31	350	V
			* 3.860034	45.81	ADR	33.3	-47.8	0	31.31	54	-22.69	-	-	31	350	V
			* 11.51187	56.83	PK-U	38.2	-46.1	0	48.93	-	-	74	-25.07	190	162	H
			* 11.511056	45.15	ADR	38.2	-46.1	0	37.25	54	-16.75	-	-	190	162	H
			* 11.512847	56.55	PK-U	38.2	-46.1	0	48.65	-	-	74	-25.35	221	178	V
			* 11.513041	45.19	ADR	38.2	-46.1	0	37.29	54	-16.71	-	-	221	178	V
			17.263297	57.39	PK-U	41.3	-44	0	54.69	-	-	68.2	-13.51	88	345	H
			17.265367	45.57	ADR	41.3	-44.1	0	42.77	-	-	-	-	88	345	H
			17.266072	57.79	PK-U	41.3	-44.1	0	54.99	-	-	68.2	-13.21	45	214	V
			17.267543	46.12	ADR	41.3	-44.1	0	43.32	-	-	-	-	45	214	V
	5795	6 + 5	* 4.118111	59.07	PK-U	33.2	-47.91	0	44.36	-	-	74	-29.64	0	186	H
			* 4.116689	46.98	ADR	33.2	-47.93	0	32.25	54	-21.75	-	-	0	186	H
			* 4.118478	58.53	PK-U	33.2	-47.95	0	43.78	-	-	74	-30.22	38	171	V
			* 4.119503	47.04	ADR	33.2	-48	0	32.24	54	-21.76	-	-	38	171	V
			* 11.588945	56.31	PK-U	38.3	-45.9	0	48.71	-	-	74	-25.29	163	371	H
			* 11.590548	44.93	ADR	38.3	-45.85	0	37.38	54	-16.62	-	-	163	371	H
			* 11.587743	57.06	PK-U	38.3	-45.9	0	49.46	-	-	74	-24.54	74	111	V
			* 11.588699	44.95	ADR	38.3	-45.9	0	37.35	54	-16.65	-	-	74	111	V
			17.384714	56.98	PK-U	41.4	-43.13	0	55.25	-	-	68.2	-12.95	26	227	H
			17.387917	57.36	PK-U	41.4	-43.1	0	55.66	-	-	68.2	-12.54	79	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz



UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5775	6 + 5	* 3.75621	57.45	PK-U	33.4	-47.12	0	43.73	-	-	74	-30.27	297	343	H
			* 3.7564	45.45	ADR	33.4	-47.14	0	31.71	54	-22.29	-	-	297	343	H
			* 3.76463	56.97	PK-U	33.4	-47.2	0	43.17	-	-	74	-30.83	255	201	V
			* 3.762248	45.6	ADR	33.4	-47.2	0	31.8	54	-22.2	-	-	255	201	V
			* 11.550044	54.75	PK-U	38.2	-43.8	0	49.15	-	-	74	-24.85	81	201	H
			* 11.548575	43.39	ADR	38.2	-43.74	0	37.85	54	-16.15	-	-	81	201	H
			* 11.547921	55.25	PK-U	38.2	-43.79	0	49.66	-	-	74	-24.34	167	367	V
			* 11.5489	43.34	ADR	38.2	-43.71	0	37.83	54	-16.17	-	-	167	367	V
			17.321749	54.79	PK-U	41.7	-41.3	0	55.19	-	-	68.2	-13.01	88	286	V
			17.323349	53.97	PK-U	41.7	-41.3	0	54.37	-	-	68.2	-13.83	33	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHZ)

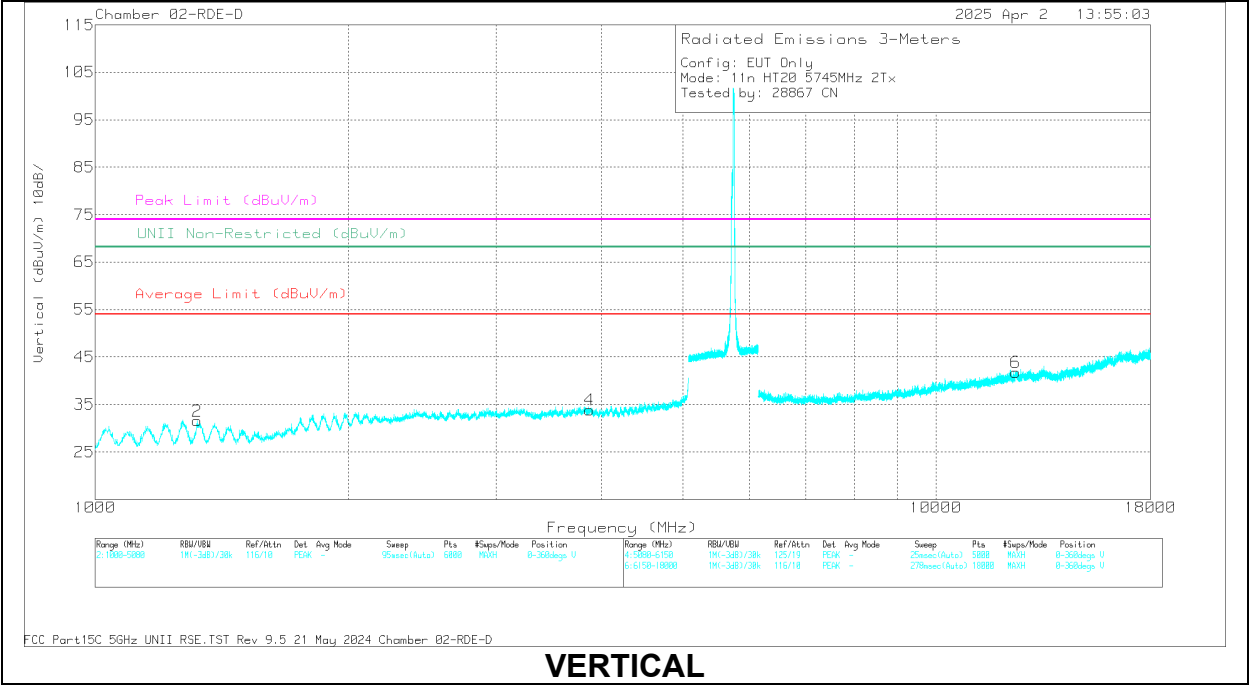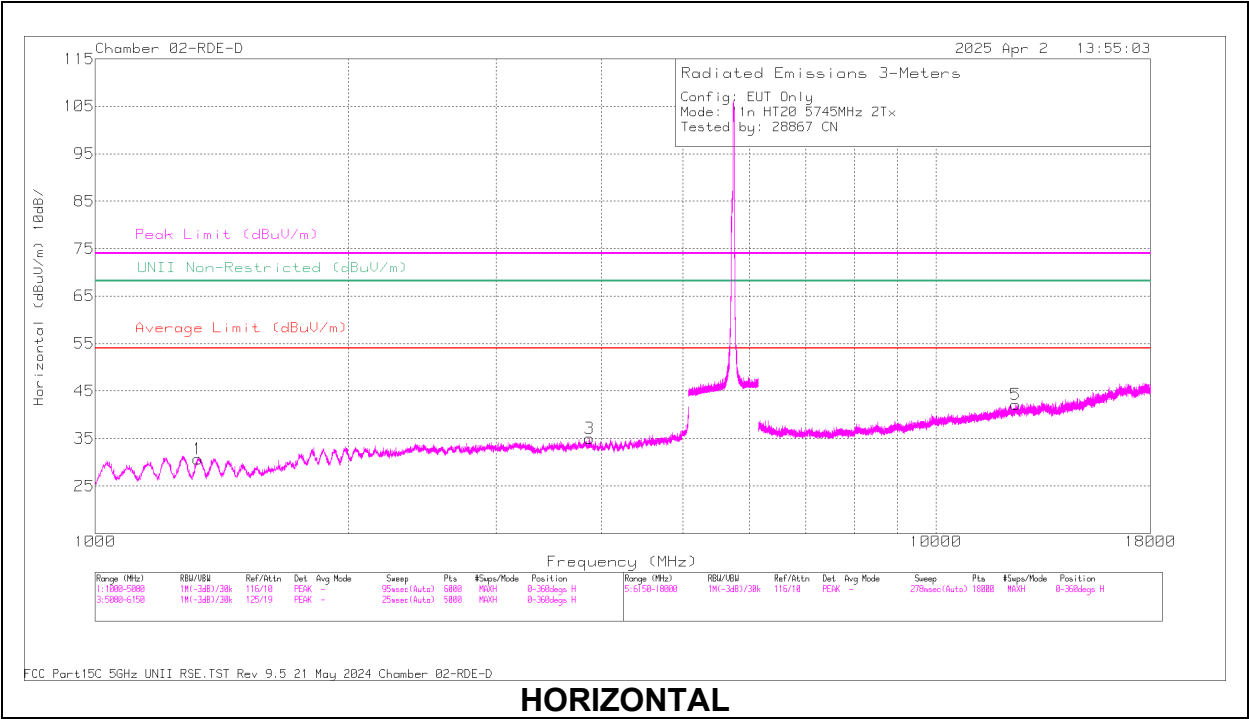

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 12.440308	51.99	PK-U	39	-39.6	0	51.39	-	-	74	-22.61	166	252	H
5	* 12.441882	40.52	ADR	39	-39.5	0	40.02	54	-13.98	-	-	166	252	H
6	* 12.443523	52.32	PK-U	39	-39.5	0	51.82	-	-	74	-22.18	352	296	V
6	* 12.446536	40.7	ADR	39	-39.4	0	40.3	54	-13.7	-	-	352	296	V
2	* 1.32925	60.57	PK-U	28.8	-48.9	0	40.47	-	-	74	-33.53	288	117	V
1	* 1.329818	49.23	ADR	28.8	-48.9	0	29.13	54	-24.87	-	-	161	151	H
1	* 1.330227	60.73	PK-U	28.8	-48.9	0	40.63	-	-	74	-33.37	161	151	H
2	* 1.330237	49.48	ADR	28.8	-48.9	0	29.38	54	-24.62	-	-	288	117	V
3	* 3.869147	55.97	PK-U	33.5	-45.4	0	44.07	-	-	74	-29.93	263	284	H
4	* 3.869721	44.23	ADR	33.5	-45.5	0	32.23	54	-21.77	-	-	209	249	V
4	* 3.876481	56.13	PK-U	33.5	-45.3	0	44.33	-	-	74	-29.67	209	249	V
3	* 3.876681	44.35	ADR	33.5	-45.3	0	32.55	54	-21.45	-	-	263	284	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.32. 802.11be MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5745	6 + 5	* 11.532422	52.41	PK-U	38.2	-40.3	0	50.31	-	-	74	-23.69	360	200	V
			* 11.534391	40.87	ADR	38.2	-40.4	0	38.67	54	-15.33	-	-	360	200	V
			* 11.548105	40.95	ADR	38.2	-40.7	0	38.45	54	-15.55	-	-	360	200	H
			* 11.553789	52.82	PK-U	38.2	-40.3	0	50.72	-	-	74	-23.28	360	200	H
			* 1.209219	61.05	PK-U	28.7	-48.9	0	40.85	-	-	74	-33.15	360	200	V
			* 1.210186	49.47	ADR	28.7	-48.9	0	29.27	54	-24.73	-	-	360	200	V
			* 1.210246	61.04	PK-U	28.7	-48.9	0	40.84	-	-	74	-33.16	360	200	H
			* 1.210546	49.41	ADR	28.8	-48.9	0	29.31	54	-24.69	-	-	360	200	H
			* 3.816206	56.27	PK-U	33.5	-45.8	0	43.97	-	-	74	-30.03	360	200	H
			* 3.821112	44.93	ADR	33.5	-45.5	0	32.93	54	-21.07	-	-	360	200	V
			* 3.825506	44.84	ADR	33.5	-45.7	0	32.64	54	-21.36	-	-	360	200	H
			* 3.833552	56.1	PK-U	33.5	-45.5	0	44.1	-	-	74	-29.9	360	200	V
	5785	6 + 5	* 10.774878	41.49	ADR	37.8	-41.3	0	37.99	54	-16.01	-	-	360	101	V
			* 10.775905	54.63	PK-U	37.8	-41.4	0	51.03	-	-	74	-22.97	360	101	V
			* 10.775991	41.44	ADR	37.8	-41.4	0	37.84	54	-16.16	-	-	360	101	H
			* 10.79052	53.3	PK-U	37.8	-41.3	0	49.8	-	-	74	-24.2	360	101	H
			* 1.322265	60.74	PK-U	28.9	-48.8	0	40.84	-	-	74	-33.16	360	101	V
			* 1.328185	49.32	ADR	28.8	-48.9	0	29.22	54	-24.78	-	-	360	101	V
			* 1.329045	60.59	PK-U	28.8	-48.9	0	40.49	-	-	74	-33.51	360	200	H
			* 1.331145	49.23	ADR	28.8	-48.8	0	29.23	54	-24.77	-	-	360	200	H
			* 3802364	56.51	PK-U	33.4	-45.8	0	44.11	-	-	74	-29.89	360	101	H
			* 3.816944	44.86	ADR	33.5	-45.8	0	32.56	54	-21.44	-	-	360	101	H
			* 3.821164	56.09	PK-U	33.5	-45.5	0	44.09	-	-	74	-29.91	360	200	V
			* 3.828964	44.93	ADR	33.5	-45.5	0	32.93	54	-21.07	-	-	360	200	V
	5825	6 + 5	* 10.899184	41.2	ADR	37.9	-40.9	0	38.2	54	-15.8	-	-	360	101	V
			* 10.901028	52.82	PK-U	37.9	-41.1	0	49.62	-	-	74	-24.38	360	101	V
			* 10.901763	52.72	PK-U	37.9	-41.1	0	49.52	-	-	74	-24.48	360	101	H
			* 10.913114	41.19	ADR	37.9	-41.1	0	37.99	54	-16.01	-	-	360	101	H
			* 1.326165	60.9	PK-U	28.9	-48.9	0	40.9	-	-	74	-33.1	360	101	V
			* 1.330391	49.23	ADR	28.8	-48.9	0	29.13	54	-24.87	-	-	360	101	V
			* 1.330838	61.07	PK-U	28.8	-48.8	0	41.07	-	-	74	-32.93	360	101	H
			* 1.331084	49.42	ADR	28.8	-48.8	0	29.42	54	-24.58	-	-	360	101	H
			* 3.8125	44.84	ADR	33.4	-45.7	0	32.54	54	-21.46	-	-	360	200	V
			* 3.814087	57.09	PK-U	33.5	-45.7	0	44.89	-	-	74	-29.11	360	200	V
			* 3.81588	44.92	ADR	33.5	-45.8	0	32.62	54	-21.38	-	-	360	200	H
			* 3.817273	56.58	PK-U	33.5	-45.7	0	44.38	-	-	74	-29.62	360	200	H
	5745 (Low Index)	6 + 5	* 3.864727	57.42	PK-U	33.4	-45.88	0	44.94	-	-	74	-29.06	61	234	H
			* 3.865604	45.85	ADR	33.4	-45.89	0	33.36	54	-20.64	-	-	61	234	H
			* 3.867001	57.61	PK-U	33.4	-45.88	0	45.13	-	-	74	-28.87	28	270	V
			* 3.867279	45.91	ADR	33.4	-45.9	0	33.41	54	-20.59	-	-	28	270	V
			2.092662	49.93	ADR	31.7	-49.41	0	32.22	-	-	-	-	178	258	H
			2.094674	61.75	PK-U	31.7	-49.38	0	44.07	-	-	68.2	-24.13	178	258	H
			2.096713	61.43	PK-U	31.7	-49.31	0	43.82	-	-	68.2	-24.38	246	314	V
			2.098515	49.9	ADR	31.7	-49.34	0	32.26	-	-	-	-	246	314	V
			9.271978	56.78	PK-U	36.4	-43.66	0	49.52	-	-	68.2	-18.68	8	261	V
			9.274894	45.56	ADR	36.4	-43.68	0	38.28	-	-	-	-	8	261	V
			9.28599	57.05	PK-U	36.4	-43.31	0	50.14	-	-	68.2	-18.06	30	115	H
			9.287816	45.47	ADR	36.4	-43.35	0	38.52	-	-	-	-	30	115	H
	5785 (Mid Index)	6 + 5	2.284293	61.36	PK-U	31.6	-49.11	0	43.85	-	-	74	-30.15	360	101	V
			2.295426	49.49	ADR	31.6	-48.95	0	32.14	54	-21.86	-	-	360	101	V
			2.296122	61.5	PK-U	31.6	-48.92	0	44.18	-	-	74	-29.82	360	101	H
			2.310295	49.66	ADR	31.6	-49.14	0	32.12	54	-21.88	-	-	360	101	H
			9.879547	48.82	ADR	37.2	-45.79	0	40.23	-	-	-	-	360	101	V
			9.900453	48.95	ADR	37.2	-46.03	0	40.12	-	-	-	-	360	101	H
			9.901378	60.6	PK-U	37.2	-46.01	0	51.79	-	-	68.2	-16.41	360	101	V
			9.903044	61.07	PK-U	37.2	-46	0	52.27	-	-	68.2	-15.93	360	101	H
			12.121226	46.68	ADR	38.9	-43.96	0	41.62	54	-12.38	-	-	360	101	V
			12.129795	58.35	PK-U	38.9	-44.04	0	53.21	-	-	74	-20.79	360	101	H
			12.138111	46.62	ADR	38.9	-44.01	0	41.51	54	-12.49	-	-	360	101	H
			12.148924	58.53	PK-U	39	-43.82	0	53.71	-	-	74	-20.29	360	101	V
	5825 (High Index)	6 + 5	1.89886	63.57	PK-U	31.4	-48.86	0	46.11	-	-	68.2	-22.09	151	114	H
			1.90072	50.41	ADR	31.4	-48.87	0	32.94	-	-	-	-	151	114	H
			3.947892	58.15	PK-U	33.4	-46.97	0	44.58	-	-	74	-29.42	337	400	V
			3.953646	46.74	ADR	33.4	-47.01	0	33.13	54	-20.87	-	-	337	400	V
			8.534301	57.93	PK-U	36	-44.63	0	49.3	-	-	68.2	-18.9	337	400	V
			8.546785	46.24	ADR	36	-44.58	0	37.66	-	-	-	-	337	400	V
			9.126904	45.92	ADR	36.3	-44.17	0	38.05	54	-15.95	-	-	337	400	H
			9.13761	57.66	PK-U	36.4	-44.63	0	49.43	-	-	74	-24.57	337	400	H
			12.952773	58.4	PK-U	39.1	-43.82	0	53.68	-	-	68.2	-14.52	337	400	H
			12.955493	47.18	ADR	39.1	-43.8	0	42.48	-	-	-	-	337	400	H
			13.171246	58.58	PK-U	38.9	-43.68	0	53.8	-	-	68.2	-14.4	337	400	V
			13.202855	46.75	ADR	38.9	-43.65	0	42	-	-	-	-	337	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5755	6 + 5	* 1.239225	62.38	PK-U	28.5	0	-49.82	41.06	-	-	74	-32.94	0	199	H
			* 1.238845	50.6	ADR	28.5	0	-49.8	29.3	54	-24.7	-	-	0	199	H
			* 4.713466	58.3	PK-U	34.1	0	-48.05	44.35	-	-	74	-29.65	0	101	H
			* 4.714162	46.69	ADR	34.1	0	-48.08	32.71	54	-21.29	-	-	0	101	H
			* 1.238593	61.87	PK-U	28.5	0	-49.8	40.57	-	-	74	-33.43	0	199	V
			* 1.240381	50.42	ADR	28.5	0	-49.86	29.06	54	-24.94	-	-	0	199	V
			* 4.838064	58.25	PK-U	34	0	-47.99	44.26	-	-	74	-29.74	0	199	V
			* 4.837664	46.65	ADR	34	0	-48	32.65	54	-21.35	-	-	0	199	V
			16.536316	54.56	PK-U	41.4	0	-42	53.96	-	-	68.2	-14.24	0	199	H
			17.010767	54.01	PK-U	41.9	0	-41.6	54.31	-	-	68.2	-13.89	0	199	V
	5795	6 + 5	* 1.178837	62.27	PK-U	28.1	0	-49.9	40.47	-	-	74	-33.53	0	101	H
			* 1.178055	50.61	ADR	28.1	0	-49.9	28.81	54	-25.19	-	-	0	101	H
			* 4.029691	57.51	PK-U	33.4	0	-47	43.91	-	-	74	-30.09	0	200	H
			* 4.031121	45.34	ADR	33.4	0	-47	31.74	54	-22.26	-	-	0	200	H
			* 1.289942	62.31	PK-U	28.5	0	-49.5	41.31	-	-	74	-32.69	0	101	V
			* 1.289981	50.53	ADR	28.5	0	-49.5	29.53	54	-24.47	-	-	0	101	V
			* 4.56462	58.08	PK-U	34.1	0	-47.86	44.32	-	-	74	-29.68	0	198	V
			* 4.567722	46.73	ADR	34.1	0	-47.9	32.93	54	-21.07	-	-	0	198	V
			17.039729	54.54	PK-U	41.8	0	-41.5	54.84	-	-	68.2	-13.36	0	200	V
			17.475787	53.78	PK-U	41.8	0	-40.8	54.78	-	-	68.2	-13.42	0	200	H
11be (106T / Highest PSD)	5755 (Low Index)	6 + 5	* 1.270268	60.63	PK-U	29.1	0	-48.8	40.93	-	-	74	-33.07	52	148	V
			* 1.272562	49.3	ADR	29.2	0.15	-48.9	29.75	54	-24.25	-	-	187	221	H
			* 1.273408	49.36	ADR	29.2	0.15	-48.8	29.91	54	-24.09	-	-	52	148	V
			* 1.277935	60.98	PK-U	29.2	0	-48.8	41.38	-	-	74	-32.62	187	221	H
			* 4.849721	56.57	PK-U	34.1	0	-44.8	45.87	-	-	74	-28.13	33	147	H
			* 4.854238	44.58	ADR	34.2	0.15	-44.8	34.13	54	-19.87	-	-	162	125	V
			* 4.858501	44.71	ADR	34.2	0.15	-44.9	34.16	54	-19.84	-	-	33	147	H
			* 4.860391	56.07	PK-U	34.2	0	-44.8	45.47	-	-	74	-28.53	162	125	V
			9.832861	54.11	PK-U	37.1	0	-41.6	49.61	-	-	68.2	-18.59	255	271	H
			9.837612	53.42	PK-U	37.1	0	-41.7	48.82	-	-	68.2	-19.38	109	330	V
	5795 (High Index)	6 + 5	* 1.558529	57.01	PK-U	28	0	-46.23	38.78	-	-	74	-35.22	51	257	H
			* 1.556657	45.63	ADR	28	0.15	-46.24	27.54	54	-26.46	-	-	51	257	H
			* 2.800162	57.45	PK-U	32.3	0	-46.19	43.56	-	-	74	-30.44	232	389	H
			* 2.798228	45.56	ADR	32.3	0.15	-46.16	31.85	54	-22.15	-	-	232	389	H
			* 1.551682	57.44	PK-U	28	0	-46.2	39.24	-	-	74	-34.76	353	159	V
			* 1.553995	46	ADR	28	0.15	-46.23	27.92	54	-26.08	-	-	353	159	V
			* 2.796312	56.88	PK-U	32.3	0	-46.14	43.04	-	-	74	-30.96	199	212	V
			* 2.797678	45.56	ADR	32.3	0.15	-46.16	31.85	54	-22.15	-	-	199	212	V
			* 11.152997	52.45	PK-U	37.8	0	-40.43	49.82	-	-	74	-24.18	353	223	H
			* 11.153442	40.85	ADR	37.8	0.15	-40.43	38.37	54	-15.63	-	-	353	223	H
			* 11.151545	52.58	PK-U	37.8	0	-40.39	49.99	-	-	74	-24.01	209	298	V
			* 11.148997	41.19	ADR	37.8	0.15	-40.36	38.78	54	-15.22	-	-	209	298	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz



UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5775	6 + 5	* 4.574283	58.82	PK-U	34.1	0	-47.73	45.19	-	-	74	-28.81	360	200	H
			* 4.571635	46.4	ADR	34.1	0	-47.74	32.76	54	-21.24	-	-	360	200	H
			* 4.609287	57.74	PK-U	34.1	0	-47.83	44.01	-	-	74	-29.99	360	101	V
			* 4.611445	46.31	ADR	34.1	0	-47.84	32.57	54	-21.43	-	-	360	101	V
			1.847535	49.96	ADR	30.6	0	-49.25	31.31	-	-	-	-	360	101	V
			1.848866	61.78	PK-U	30.6	0	-49.21	43.17	-	-	68.2	-25.03	360	101	V
			1.898092	61.79	PK-U	30.9	0	-49.21	43.48	-	-	68.2	-24.72	360	200	H
			17.006541	53.56	PK-U	41.9	0	-41.61	53.85	-	-	68.2	-14.35	360	200	V
			17.078039	54.29	PK-U	41.8	0	-41.2	54.89	-	-	68.2	-13.31	360	200	H
			1.783874	60.84	PK-U	30.2	0	-49.41	41.63	-	-	68.2	-26.57	5	124	H
11be (484T / Highest PSD)	5775 (High Index)	6 + 5	1.788147	49.13	ADR	30.2	0	-49.43	29.9	-	-	-	-	5	124	H
			3.697148	57.58	PK-U	33.2	0	-47.47	43.31	-	-	74	-30.69	237	199	H
			3.696015	45.95	ADR	33.2	0	-47.46	31.69	54	-22.31	-	-	237	199	H
			1.789194	60.7	PK-U	30.2	0	-49.44	41.46	-	-	68.2	-26.74	118	274	V
			1.787188	49.19	ADR	30.2	0	-49.42	29.97	-	-	-	-	118	274	V
			3.690863	57.53	PK-U	33.2	0	-47.42	43.31	-	-	74	-30.69	268	362	V
			3.702789	45.88	ADR	33.2	0	-47.36	31.72	54	-22.28	-	-	268	362	V
			11.156164	56.06	PK-U	37.6	0	-45.1	48.56	-	-	74	-25.44	268	199	H
			11.171591	44.3	ADR	37.7	0	-45.15	36.85	54	-17.15	-	-	268	199	H
			11.156952	55.78	PK-U	37.6	0	-45.12	48.26	-	-	74	-25.74	268	101	V
11be (106T / Highest PSD)	5775 (High Index)	6 + 5	11.155805	44.43	ADR	37.6	0	-45.09	36.94	54	-17.06	-	-	268	101	V
			* 3.68524	55.59	PK-U	33.1	0	-44.8	43.89	-	-	74	-30.11	10	137	H
			* 3.686211	43.55	ADR	33.1	0.13	-44.8	31.98	54	-22.02	-	-	10	137	H
			* 1.684193	57.51	PK-U	28.8	0	-46.58	39.73	-	-	74	-34.27	274	132	V
			* 1.681416	46.01	ADR	28.8	0.13	-46.56	28.38	54	-25.62	-	-	274	132	V
			* 12.132445	52.95	PK-U	38.7	0	-40.61	51.04	-	-	74	-22.96	190	110	H
			* 12.13025	41.13	ADR	38.7	0.13	-40.56	39.4	54	-14.6	-	-	190	110	H
			* 12.047294	52.96	PK-U	38.7	0	-40.66	51	-	-	74	-23	2	240	V
			* 12.047202	41.1	ADR	38.7	0.13	-40.66	39.27	54	-14.73	-	-	2	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHz)

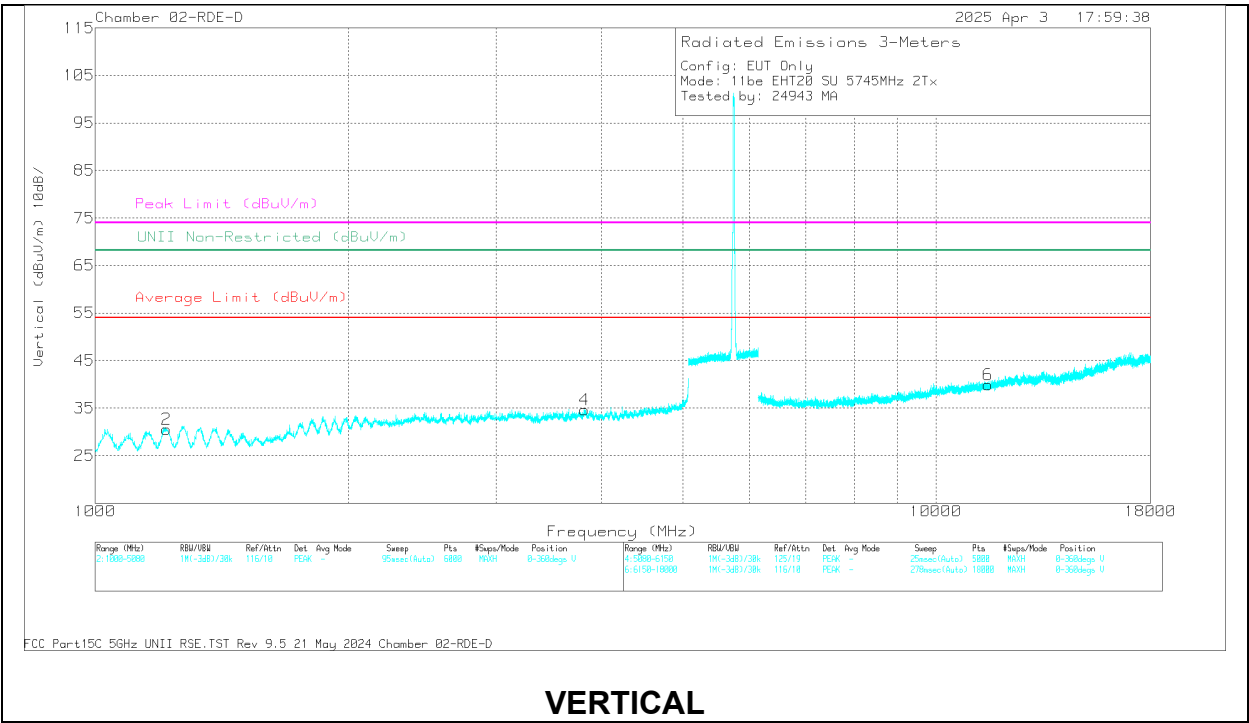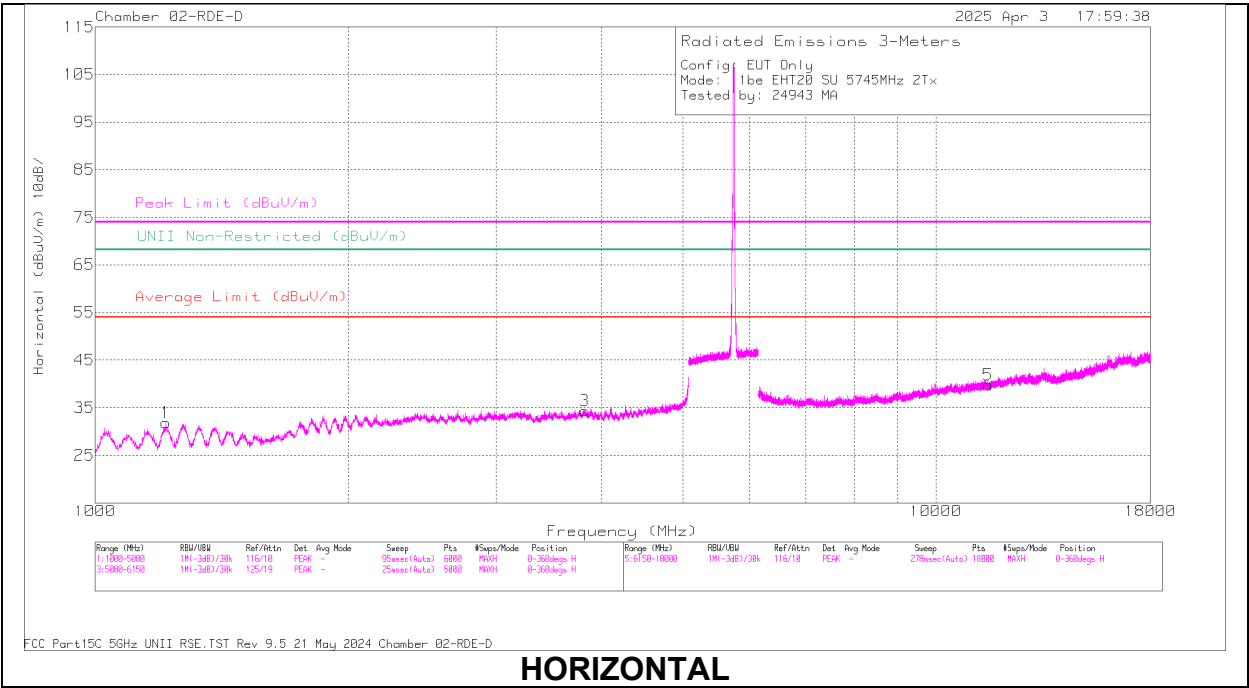

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 11.532422	52.41	PK-U	38.2	-40.3	0	50.31	-	-	74	-23.69	360	200	V
6	* 11.534391	40.87	ADR	38.2	-40.4	0	38.67	54	-15.33	-	-	360	200	V
5	* 11.548105	40.95	ADR	38.2	-40.7	0	38.45	54	-15.55	-	-	360	200	H
5	* 11.553789	52.82	PK-U	38.2	-40.3	0	50.72	-	-	74	-23.28	360	200	H
1	* 1.209219	61.05	PK-U	28.7	-48.9	0	40.85	-	-	74	-33.15	360	200	V
2	* 1.210186	49.47	ADR	28.7	-48.9	0	29.27	54	-24.73	-	-	360	200	V
2	* 1.210246	61.04	PK-U	28.7	-48.9	0	40.84	-	-	74	-33.16	360	200	H
1	* 1.210546	49.41	ADR	28.8	-48.9	0	29.31	54	-24.69	-	-	360	200	H
3	* 3.816206	56.27	PK-U	33.5	-45.8	0	43.97	-	-	74	-30.03	360	200	H
4	* 3.821112	44.93	ADR	33.5	-45.5	0	32.93	54	-21.07	-	-	360	200	V
3	* 3.825506	44.84	ADR	33.5	-45.7	0	32.64	54	-21.36	-	-	360	200	H
4	* 3.833552	56.1	PK-U	33.5	-45.5	0	44.1	-	-	74	-29.9	360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

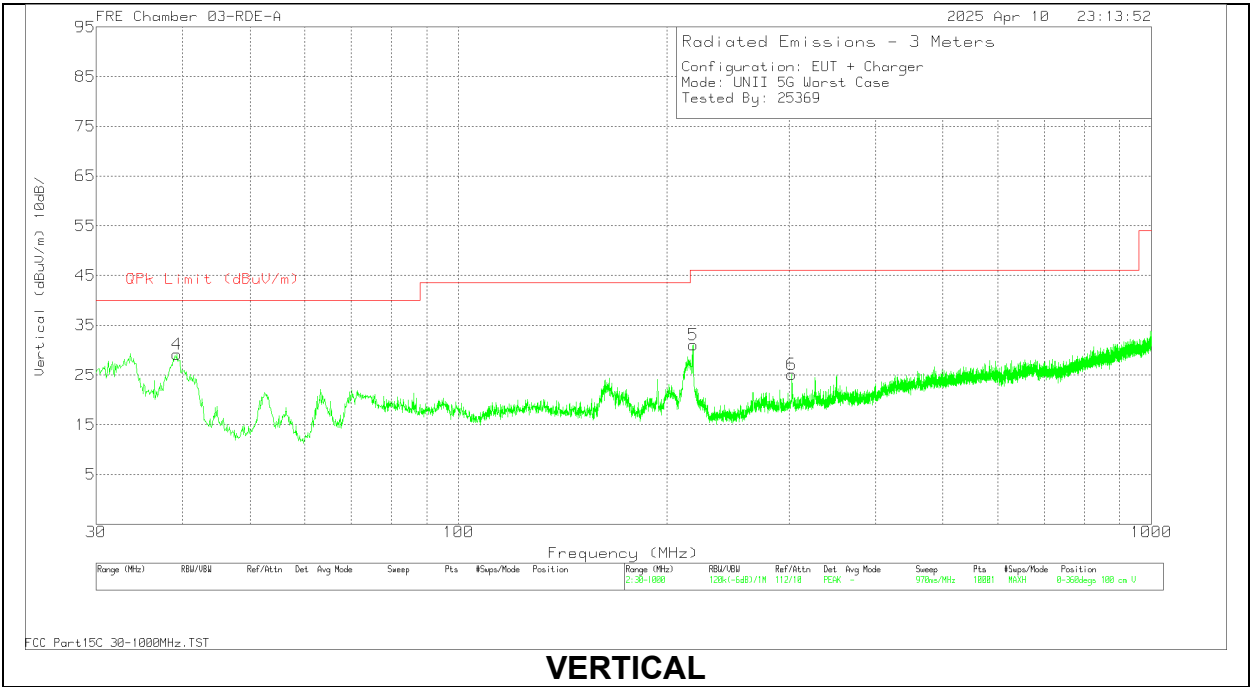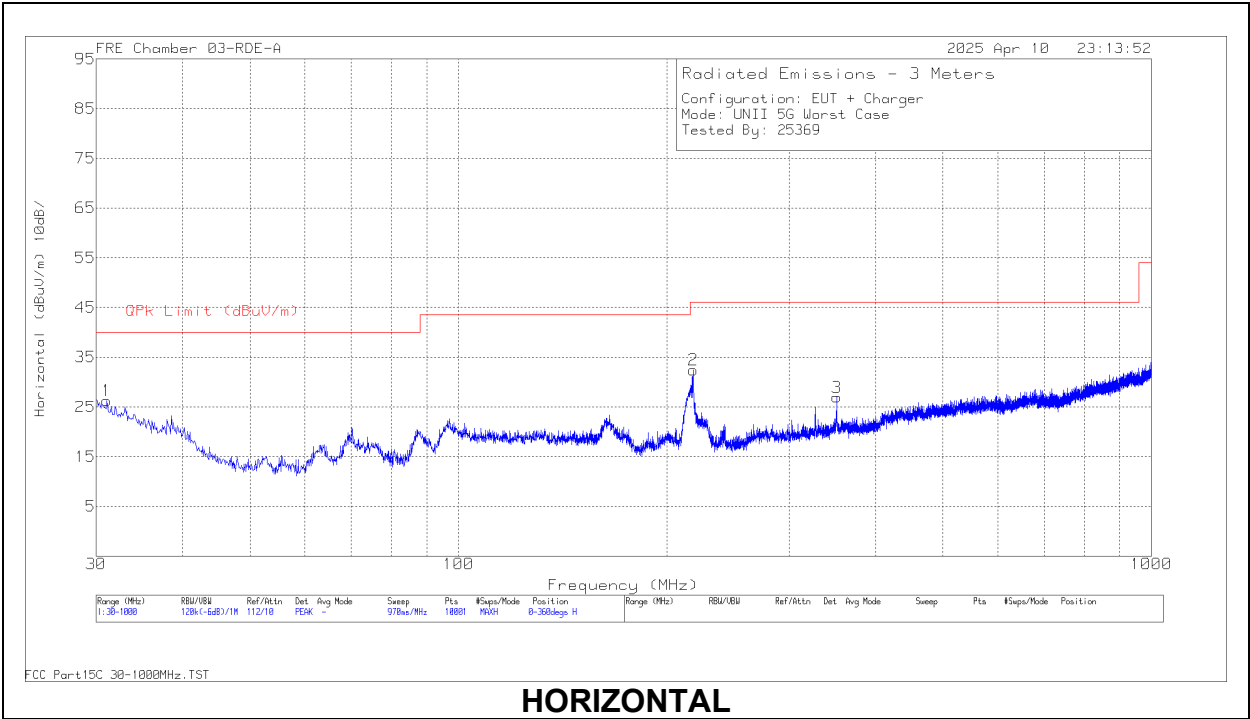



Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80813 ACF (dB/m)	CBL AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.0598	21.88	Qp	26	-31	17.28	40	-22.72	93	227	H
4	39.2251	35.76	Qp	20.1	-30.8	25.46	40	-14.54	104	100	V
5	217.834	42.13	Qp	16.5	-29.4	29.63	46.02	-16.39	12	105	V
2	217.874	45.14	Qp	16.5	-29.4	32.64	46.02	-13.38	47	112	H
6	302.626	31.08	Qp	19.4	-28.7	22.18	46.02	-23.84	180	112	V
3	350.911	33.51	Qp	20.1	-28.8	25.21	46.02	-20.81	235	100	H

Qp - Quasi-Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

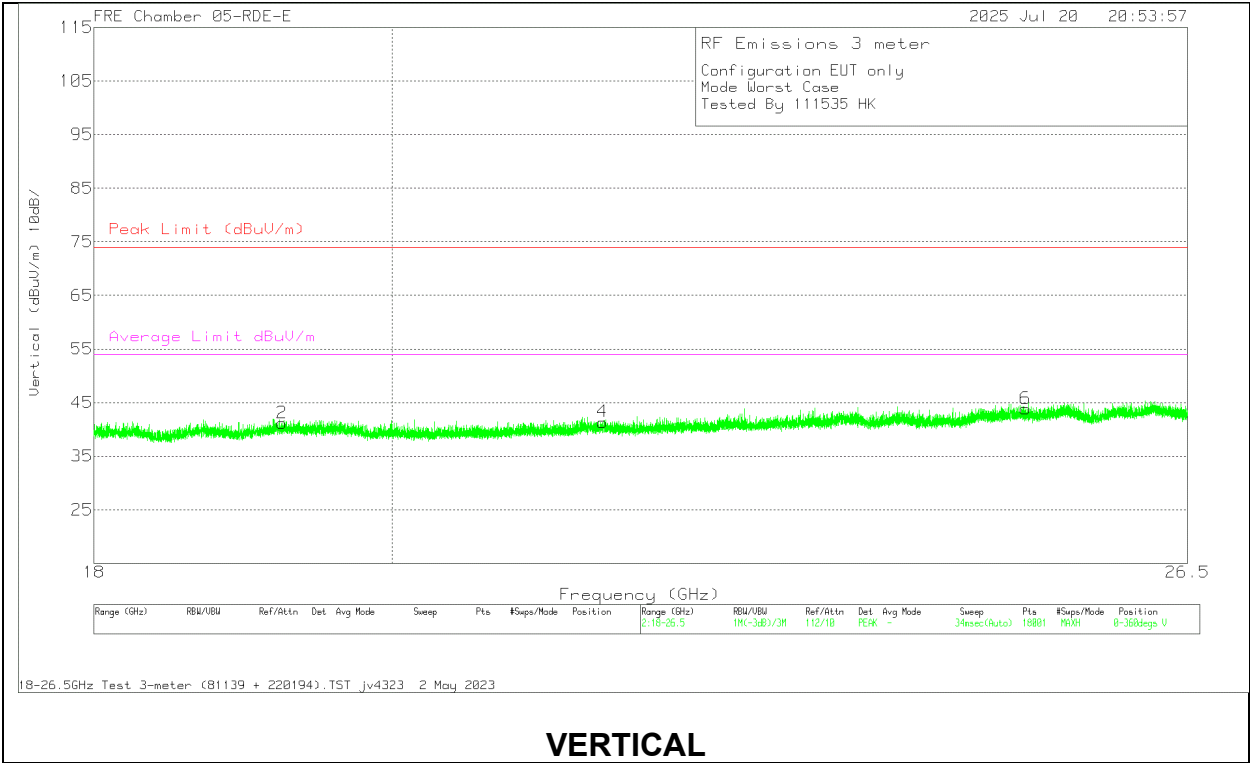
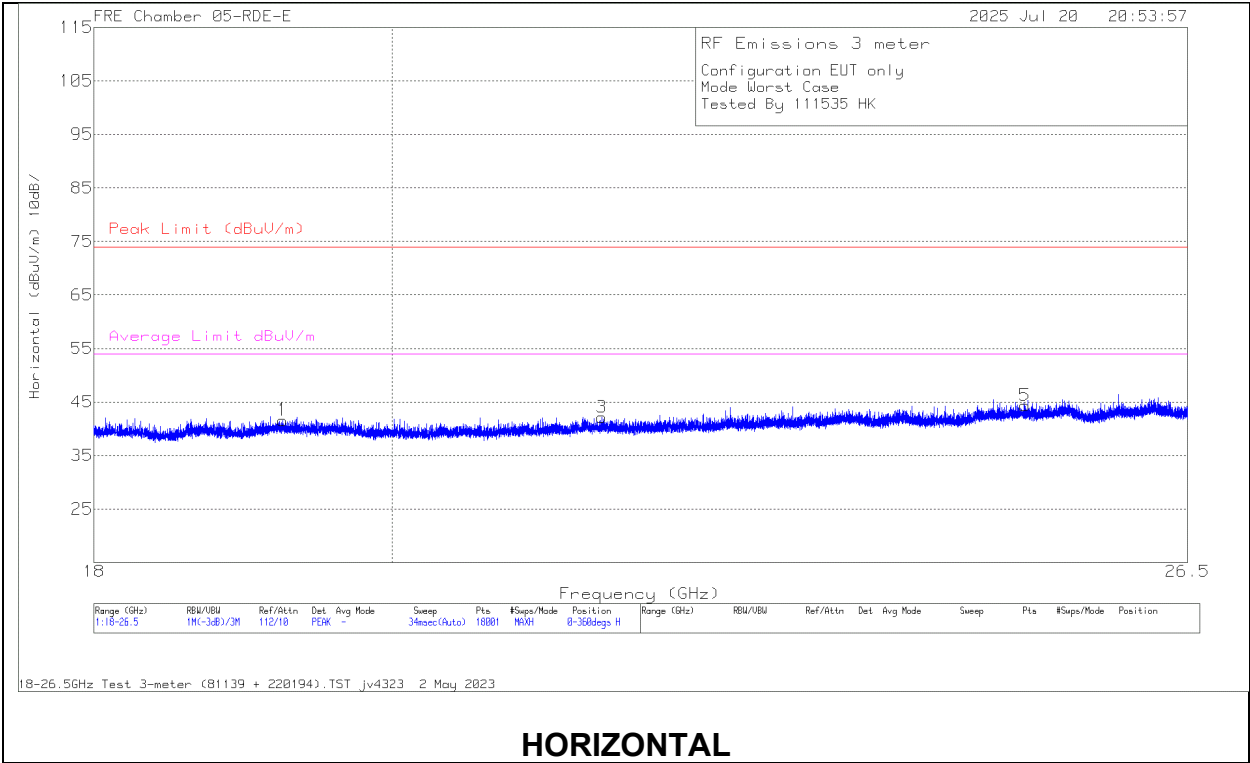


18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	CBL/AMP (dB)	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19.244508	48.62	PK-U	33	-62.3	23.9	43.22	74	-30.78	54	-10.78	1	199	H
3	21.544348	46.92	PK-U	33.4	-62.4	25.5	43.42	74	-30.58	54	-10.58	1	101	H
5	25.018811	45.89	PK-U	34.3	-62.8	27.8	45.19	74	-28.81	54	-8.81	1	101	H
2	* 19.238866	48.71	PK-U	33	-62.3	23.9	43.31	74	-30.69	54	-10.69	1	101	V
4	21.547703	46.11	PK-U	33.4	-62.4	25.5	42.61	74	-31.39	54	-11.39	1	101	V
6	25.025937	46.46	PK-U	34.3	-62.8	27.8	45.76	74	-28.24	54	-8.24	1	199	V

1.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)

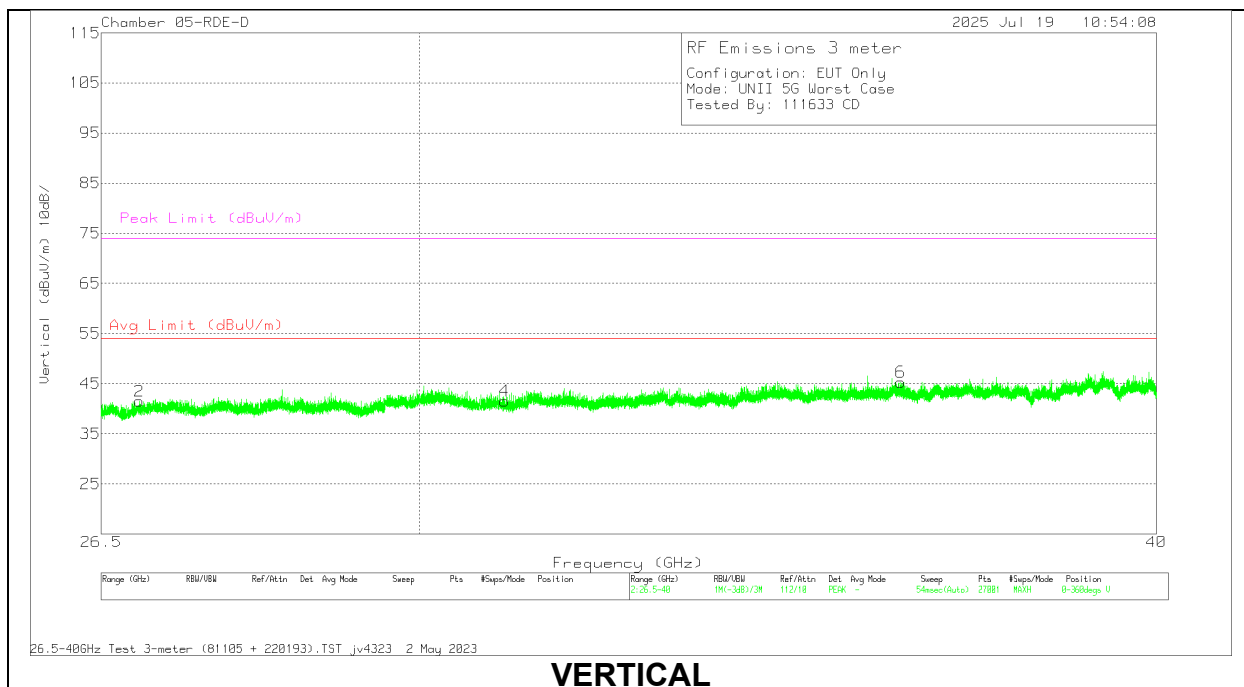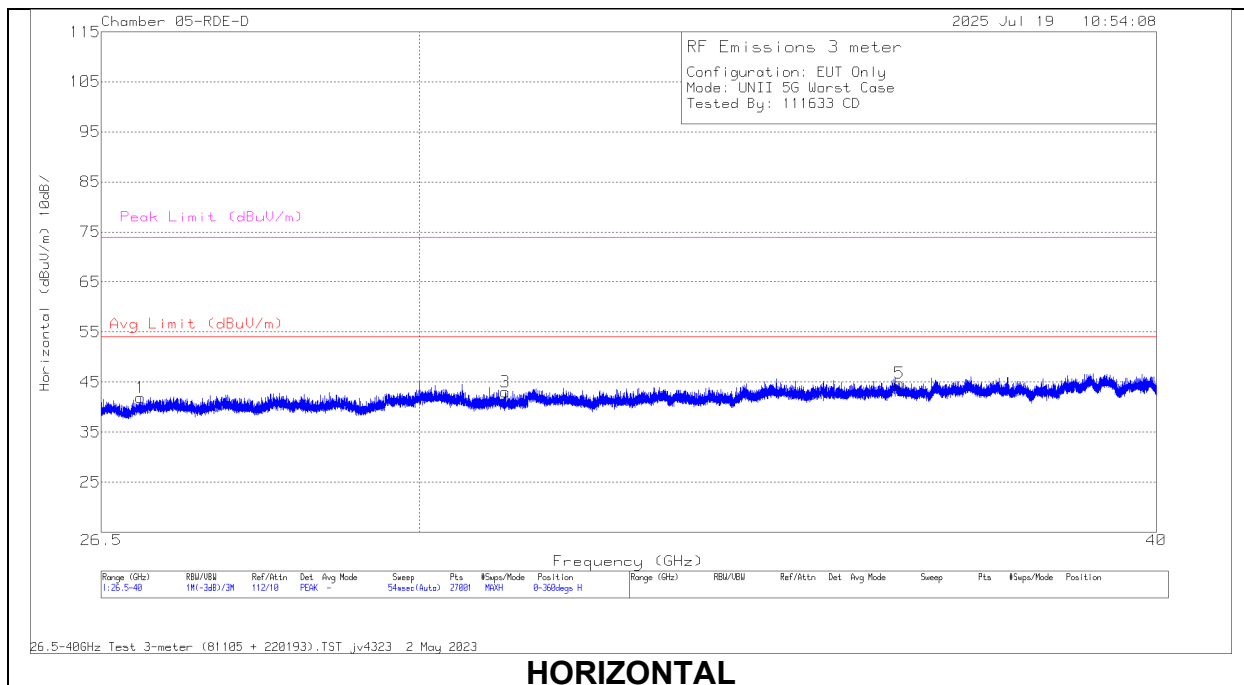

26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81105 ACF (dB/m)	CBL/AMP	CBL AMP (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	26.898043	58.35	PK-U	35.7	-67.6	16.2	42.65	74	-31.35	54	-11.35	139	232	V
1	26.907433	58.72	PK-U	35.7	-67.6	16.2	43.02	74	-30.98	54	-10.98	333	222	H
4	31.014985	52.26	PK-U	36.2	-62.4	17.2	43.26	74	-30.74	54	-10.74	183	207	V
3	31.026871	52.12	PK-U	36.3	-62.3	17.2	43.32	74	-30.68	54	-10.68	224	289	H
5	36.185465	55.51	PK-U	37.4	-65.9	19.1	46.11	74	-27.89	54	-7.89	286	314	H
6	36.20282	55.32	PK-U	37.4	-65.9	19	45.82	74	-28.18	54	-8.18	326	364	V

2. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

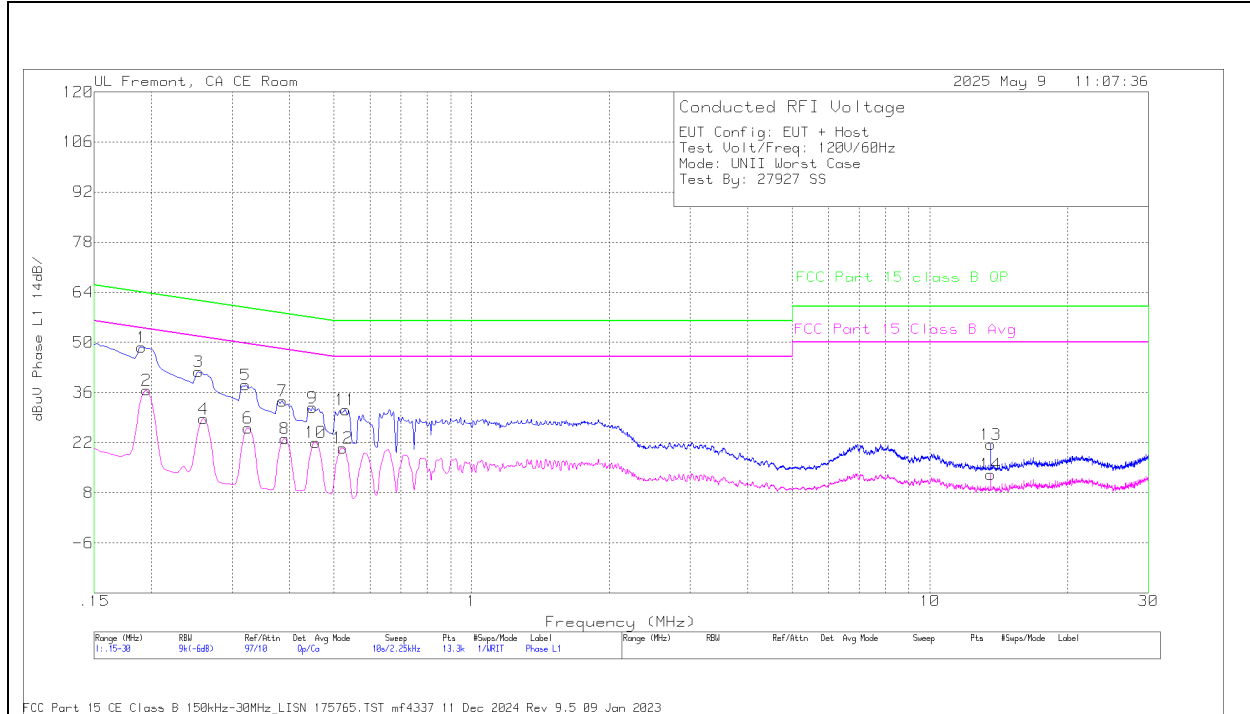

Range 1: Phase L1 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	DCCF (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
2	.195	15.96	Ca	.1	.1	8.4	10	2.11	36.67	53.82	-17.15	-	-
4	.2603	8.41	Ca	-.1	0	8.2	10	2.11	28.62	51.42	-22.8	-	-
6	.3255	5.93	Ca	-.2	0	8.2	10	2.11	26.04	49.57	-23.53	-	-
8	.3908	3.21	Ca	-.5	0	8.3	10	2.11	23.12	48.05	-24.93	-	-
10	.456	.95	Ca	.2	0	8.8	10	2.11	22.06	46.77	-24.71	-	-
12	.5235	.89	Ca	-.3	0	7.8	10	2.11	20.5	46	-25.5	-	-
14	13.56	-7.56	Ca	.2	.1	8.2	10	2.11	13.05	50	-36.95	-	-
1	.1905	27.8	Qp	.2	.1	8.4	10	2.11	48.61	-	-	64.01	-15.4
3	.2535	21.57	Qp	-.1	0	8.2	10	2.11	41.78	-	-	61.64	-19.86
5	.321	17.99	Qp	-.2	0	8.2	10	2.11	38.1	-	-	59.68	-21.58
7	.3863	13.72	Qp	-.5	0	8.3	10	2.11	33.63	-	-	58.14	-24.51
9	.4493	10.56	Qp	.2	0	8.9	10	2.11	31.77	-	-	56.89	-25.12
11	.5303	11.62	Qp	-.3	0	7.8	10	2.11	31.23	-	-	56	-24.77
13	13.56	.84	Qp	.2	.1	8.2	10	2.11	21.45	-	-	60	-38.55

Qp - Quasi-Peak detector

Ca - CISPR average detection

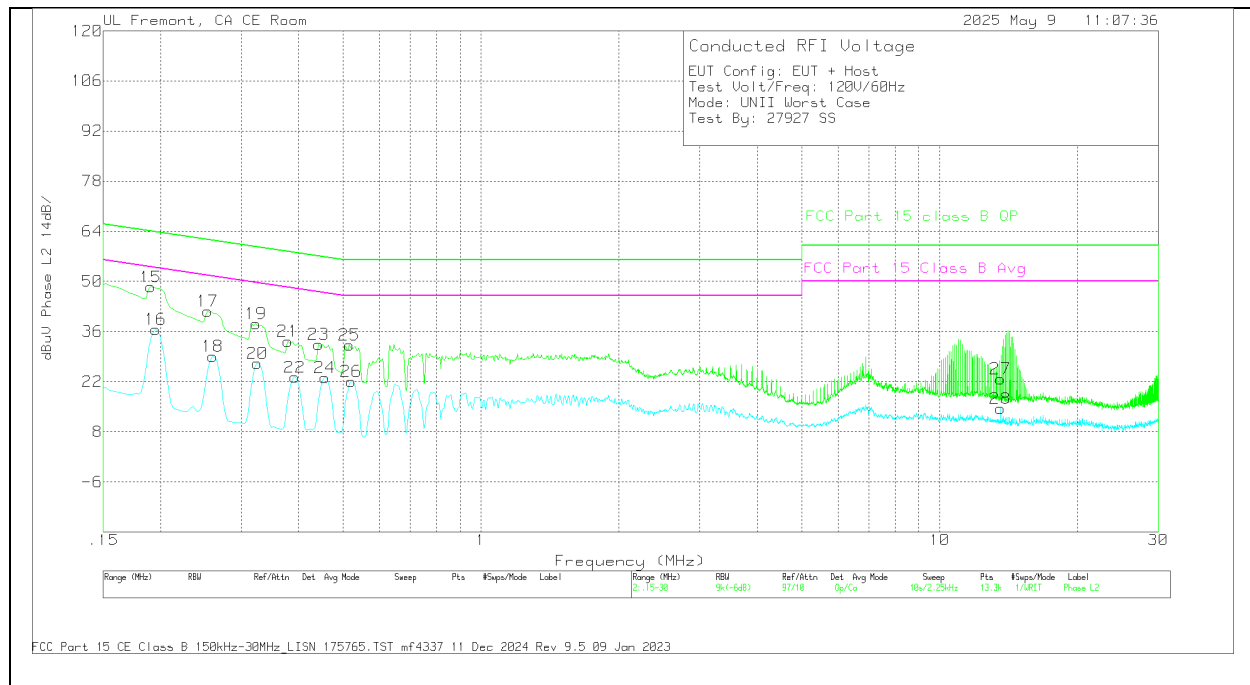LINE 2 RESULTS


Range 2: Phase L2 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	DCCF (dB)	Corrected Reading (dBUV)	FCC Part 15C Avg (dBUV)	Avg Margin (dB)	FCC Part 15C QP (dBUV)	QP Margin (dB)
16	.195	15.95	Ca	.1	0	8.4	10	2.11	36.56	53.82	-17.26	-	-
18	.2603	8.92	Ca	-.1	0	8.2	10	2.11	29.13	51.42	-22.29	-	-
20	.3255	6.95	Ca	-.2	0	8.2	10	2.11	27.06	49.57	-22.51	-	-
22	.393	3.29	Ca	-.5	0	8.3	10	2.11	23.2	48	-24.8	-	-
24	.456	2.01	Ca	-.2	0	8.8	10	2.11	23.12	46.77	-23.65	-	-
26	.5213	2.44	Ca	-.3	0	7.8	10	2.11	22.05	46	-23.95	-	-
28	13.56	-6.17	Ca	.2	.1	8.2	10	2.11	14.44	50	-35.56	-	-
15	.1905	27.72	Qp	.2	0	8.4	10	2.11	48.43	-	-	64.01	-15.58
17	.2535	21.5	Qp	-.1	0	8.2	10	2.11	41.71	-	-	61.64	-19.93
19	.3233	18.01	Qp	-.2	0	8.2	10	2.11	38.12	-	-	59.62	-21.5
21	.3795	13.38	Qp	-.5	0	8.3	10	2.11	33.29	-	-	58.29	-25
23	.4425	11.42	Qp	-.1	0	8.8	10	2.11	32.43	-	-	57.01	-24.58
25	.5168	12.49	Qp	-.2	0	7.8	10	2.11	32.2	-	-	56	-23.8
27	13.56	2.2	Qp	.2	.1	8.2	10	2.11	22.81	-	-	60	-37.19

Qp - Quasi-Peak detector

Ca - CISPR average detection

2.2. AC POWER LINE WITH AC/DC ADAPTER


LINE 1 RESULTS

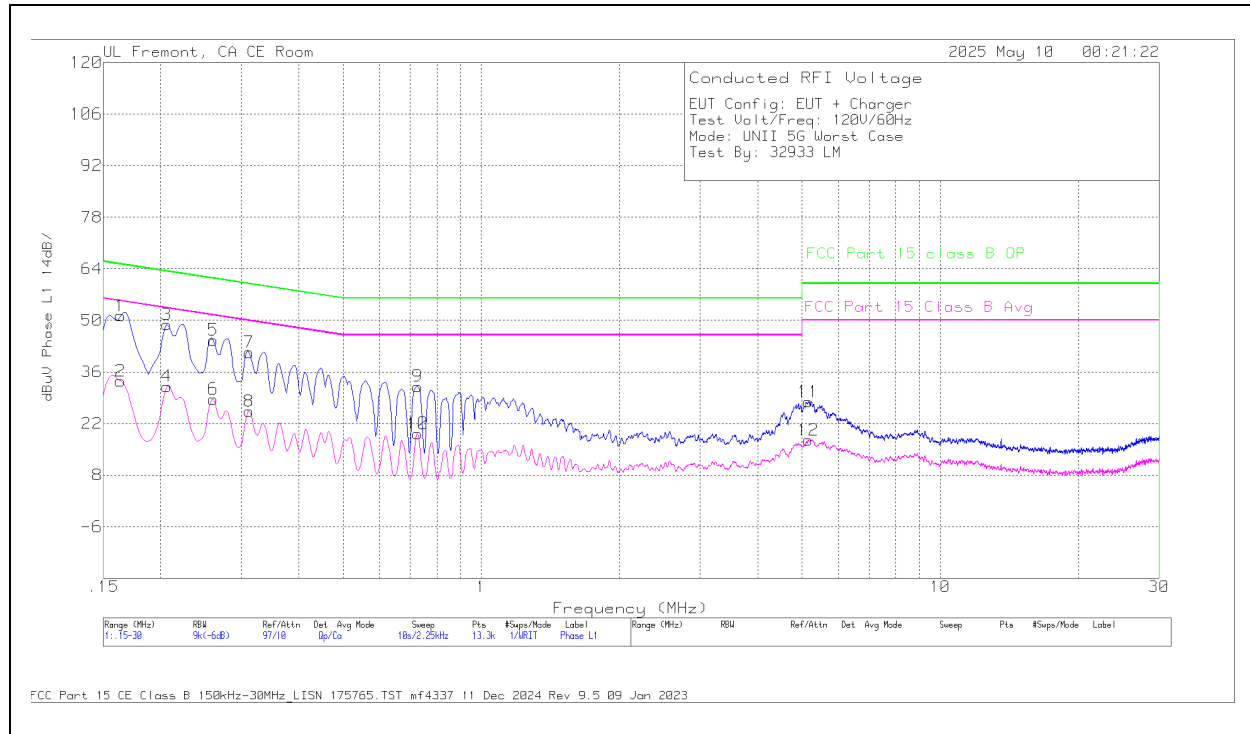

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
2	.1635	14.48	Ca	.4	.1	8.5	10	33.48	55.28	-21.8	-	-
4	.2063	13.56	Ca	.1	0	8.4	10	32.06	53.35	-21.29	-	-
6	.2603	10.53	Ca	-.1	0	8.2	10	28.63	51.42	-22.79	-	-
8	.312	7.33	Ca	-.1	0	8.1	10	25.33	49.92	-24.59	-	-
10	.726	.71	Ca	.1	0	8.4	10	19.21	46	-26.79	-	-
12	5.154	-1.03	Ca	.2	0	8.3	10	17.47	50	-32.53	-	-
1	.1635	32.22	Qp	.4	.1	8.5	10	51.22	-	-	65.28	-14.06
3	.2063	30.36	Qp	.1	0	8.4	10	48.86	-	-	63.35	-14.49
5	.2603	26.54	Qp	-.1	0	8.2	10	44.64	-	-	61.42	-16.78
7	.312	23.29	Qp	-.1	0	8.1	10	41.29	-	-	59.92	-18.63
9	.726	13.56	Qp	.1	0	8.4	10	32.06	-	-	56	-23.94
11	5.154	9.39	Qp	.2	0	8.3	10	27.89	-	-	60	-32.11

Qp - Quasi-Peak detector

Ca - CISPR average detection

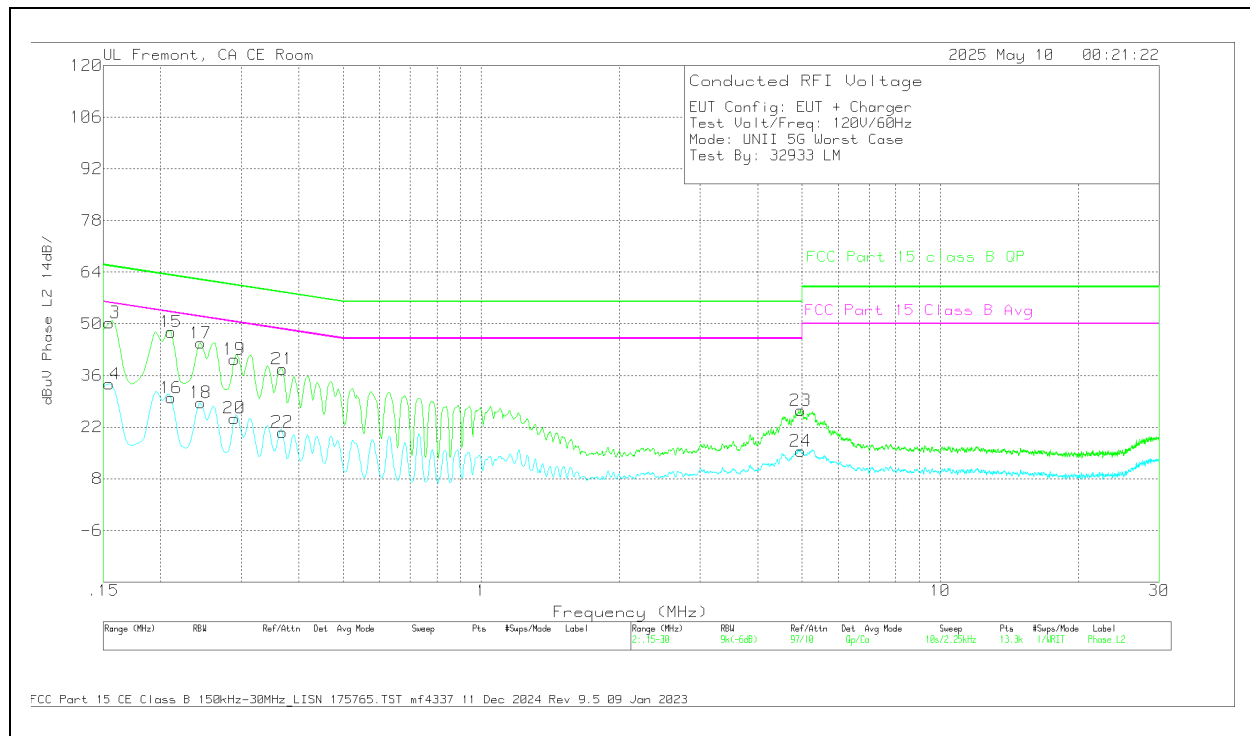LINE 2 RESULTS

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
14	.1545	14.58	Ca	.5	.1	8.5	10	33.68	55.75	-22.07	-	-
16	.2108	11.42	Ca	.1	0	8.4	10	29.92	53.18	-23.26	-	-
18	.2445	10.5	Ca	-.1	0	8.2	10	28.6	51.94	-23.34	-	-
20	.2895	6.39	Ca	0	0	8	10	24.39	50.54	-26.15	-	-
22	.3683	2.58	Ca	-.4	0	8.4	10	20.58	48.54	-27.96	-	-
24	4.9628	-2.92	Ca	.1	0	8.3	10	15.48	46	-30.52	-	-
13	.1545	31.2	Qp	.5	.1	8.5	10	50.3	-	-	65.75	-15.45
15	.2108	29.28	Qp	.1	0	8.4	10	47.78	-	-	63.18	-15.4
17	.2445	26.64	Qp	-.1	0	8.2	10	44.74	-	-	61.94	-17.2
19	.2895	22.36	Qp	0	0	8	10	40.36	-	-	60.54	-20.18
21	.3683	19.71	Qp	-.4	0	8.4	10	37.71	-	-	58.54	-20.83
23	4.9628	8.11	Qp	.1	0	8.3	10	26.51	-	-	56	-29.49

Qp - Quasi-Peak detector

Ca - CISPR average detection

3. SETUP PHOTOS

Please refer to report 15496277-EP1V1 FCC IC Setup Photos