

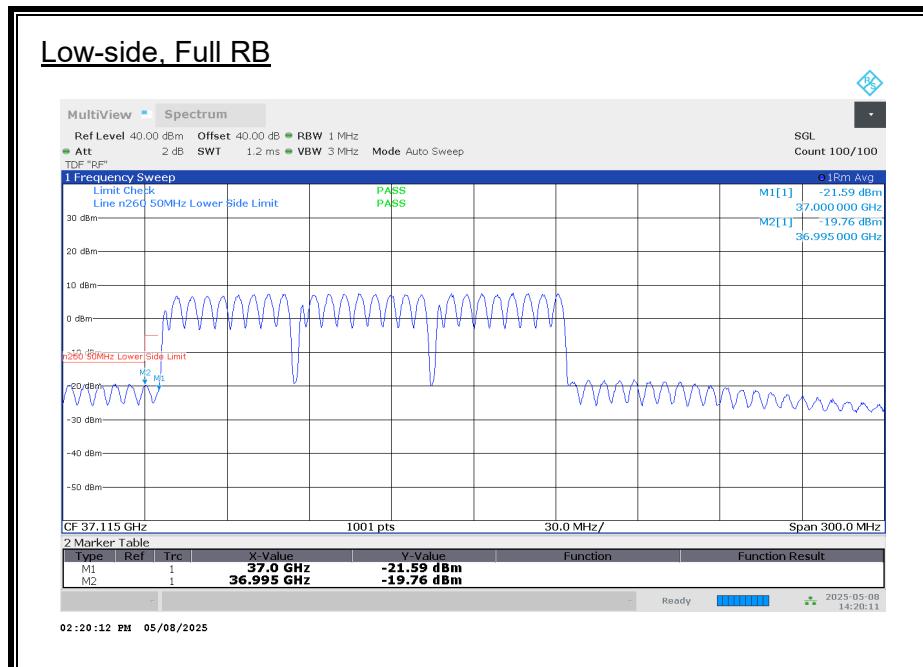
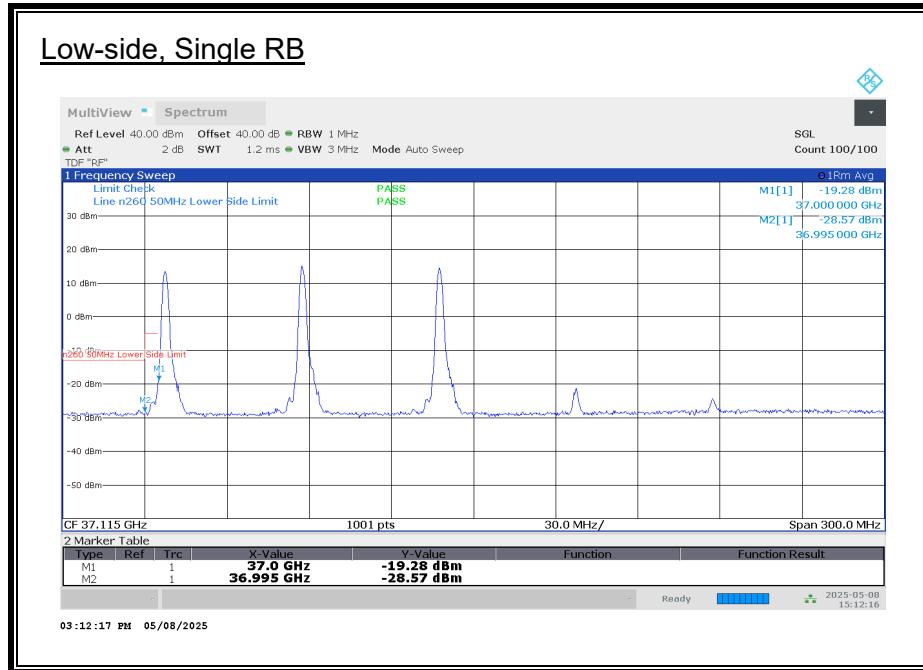


8.3.27. BAND EDGE n260 SISO-DUAL 3CC

50 MHz, SISO-DUAL, 3CC, QPSK

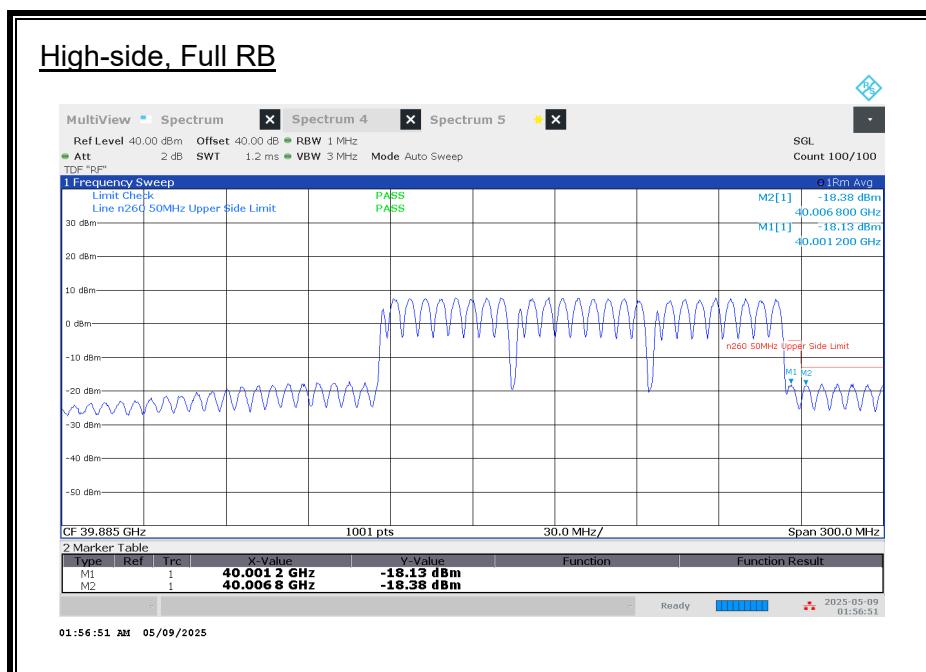

50 MHz, SISO-DUAL, 3CC, QPSK

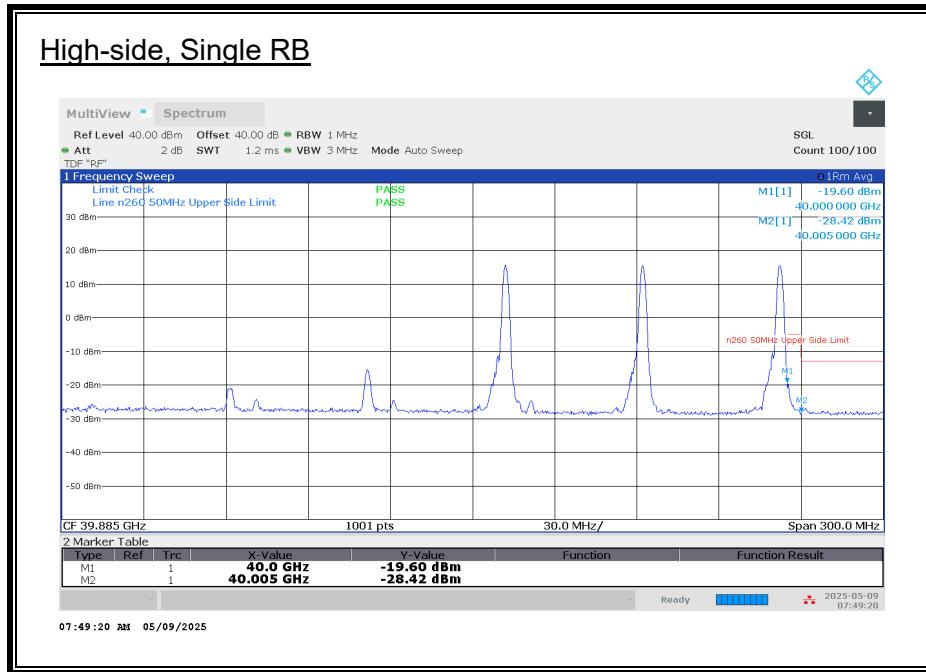

50 MHz, SISO-DUAL, 3CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-19.28	15.00	-34.28	-5.00	-29.28
			36.995	-28.57	15.00	-43.57	-13.00	-30.57
	L	32/0	37	-21.59	15.00	-36.59	-5.00	-31.59
			36.995	-19.76	15.00	-34.76	-13.00	-21.76
	H	1/31	40	-19.60	15.00	-34.60	-5.00	-29.60
			40.005	-28.42	15.00	-43.42	-13.00	-30.42
	H	32/0	40.001	-18.13	15.00	-33.13	-5.00	-28.13
			40.007	-18.38	15.00	-33.38	-13.00	-20.38

50 MHz, SISO-DUAL, 3CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-18.60	15.00	-33.60	-5.00	-28.60
			36.995	-29.28	15.00	-44.28	-13.00	-31.28
	H	1/31	40	-20.03	15.00	-35.03	-5.00	-30.03
			40.005	-28.71	15.00	-43.71	-13.00	-30.71



50 MHz, SISO-DUAL, 3CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-18.17	15.00	-33.17	-5.00	-28.17
			36.995	-28.72	15.00	-43.72	-13.00	-30.72
	H	1/31	40	-19.63	15.00	-34.63	-5.00	-29.63
			40.005	-27.93	15.00	-42.93	-13.00	-29.93


50 MHz, SISO-DUAL, 3CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-19.97	15.00	-34.97	-5.00	-29.97
			36.995	-28.67	15.00	-43.67	-13.00	-30.67
	H	1/31	40	-20.67	15.00	-35.67	-5.00	-30.67
			40.005	-28.14	15.00	-43.14	-13.00	-30.14

100 MHz, SISO-DUAL, 3CC, QPSK

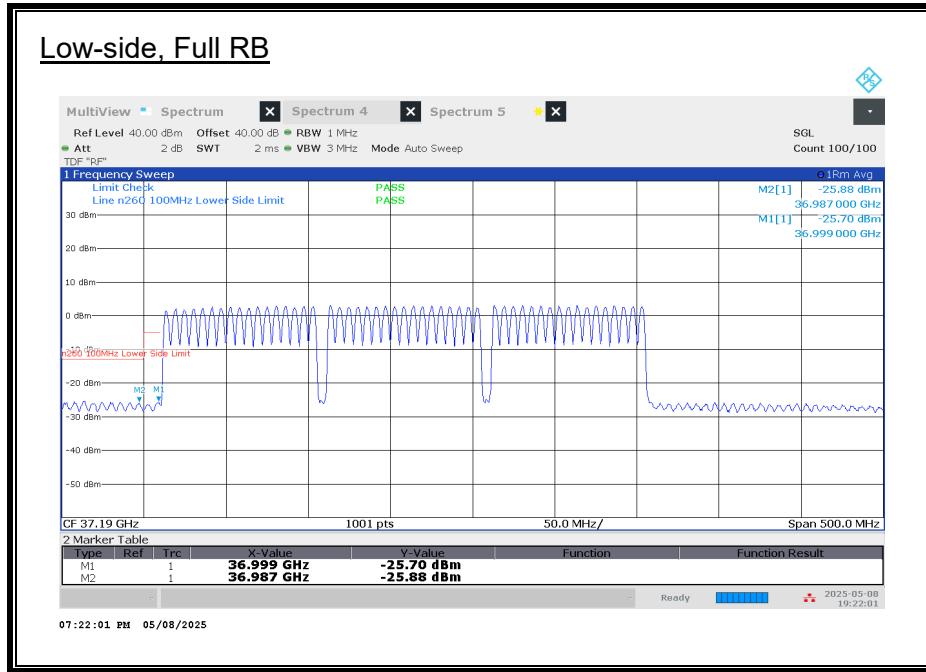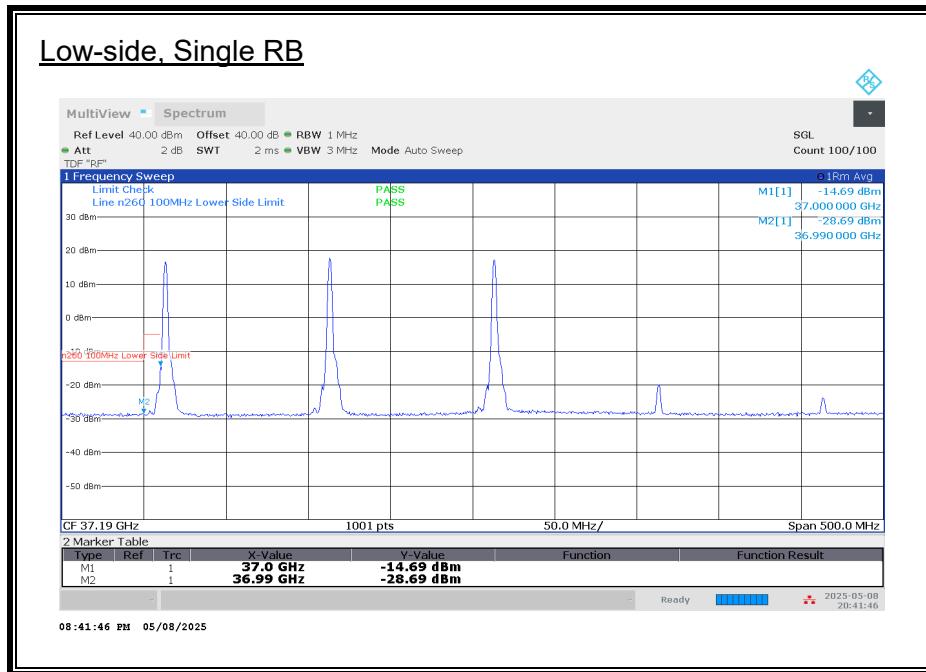

100 MHz, SISO-DUAL, 3CC, QPSK


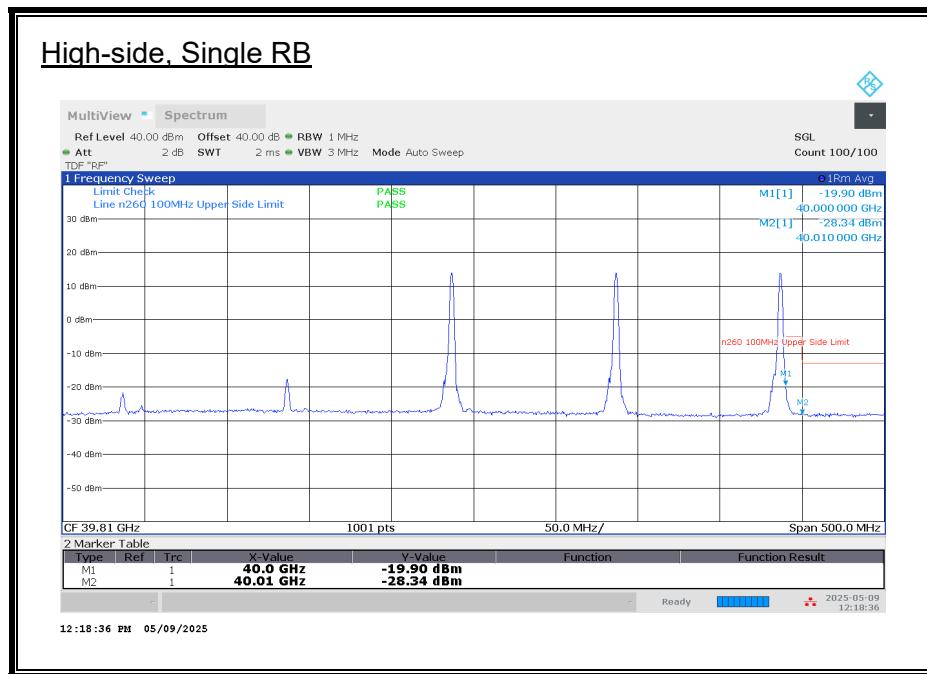


100 MHz, SISO-DUAL, 3CC, QPSK



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-14.69	15.00	-29.69	-5.00	-24.69
			36.99	-28.69	15.00	-43.69	-13.00	-30.69
	L	64/0	36.999	-25.70	15.00	-40.70	-5.00	-35.70
			36.987	-25.88	15.00	-40.88	-13.00	-27.88
	H	1/65	40	-19.90	15.00	-34.90	-5.00	-29.90
			40.01	-28.34	15.00	-43.34	-13.00	-30.34
	H	64/2	40	-26.65	15.00	-41.65	-5.00	-36.65
			40.01	-26.62	15.00	-41.62	-13.00	-28.62

8.3.28. BAND EDGE n260 SISO-DUAL 4CC

50 MHz, SISO-DUAL, 4CC, QPSK

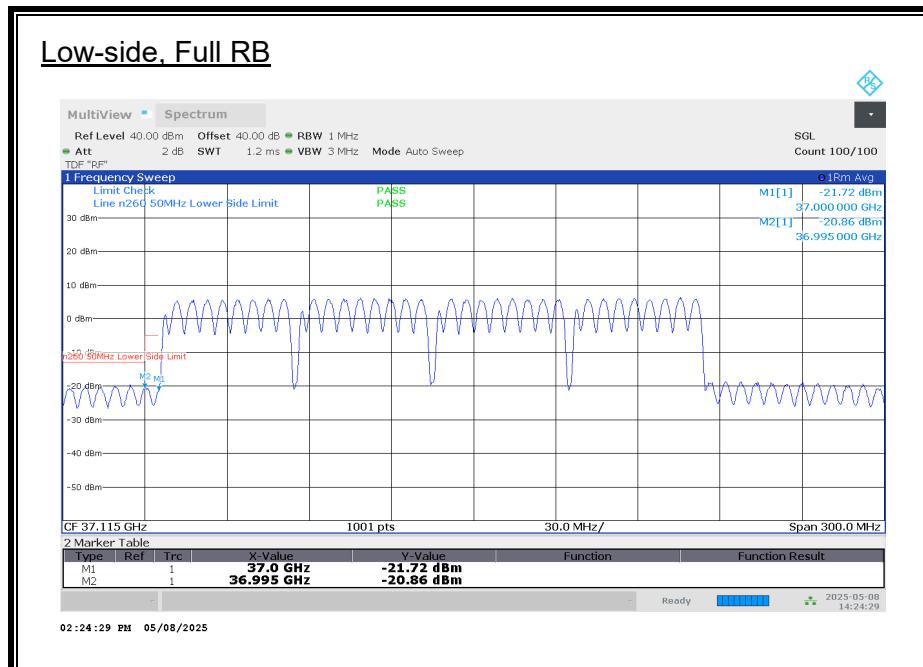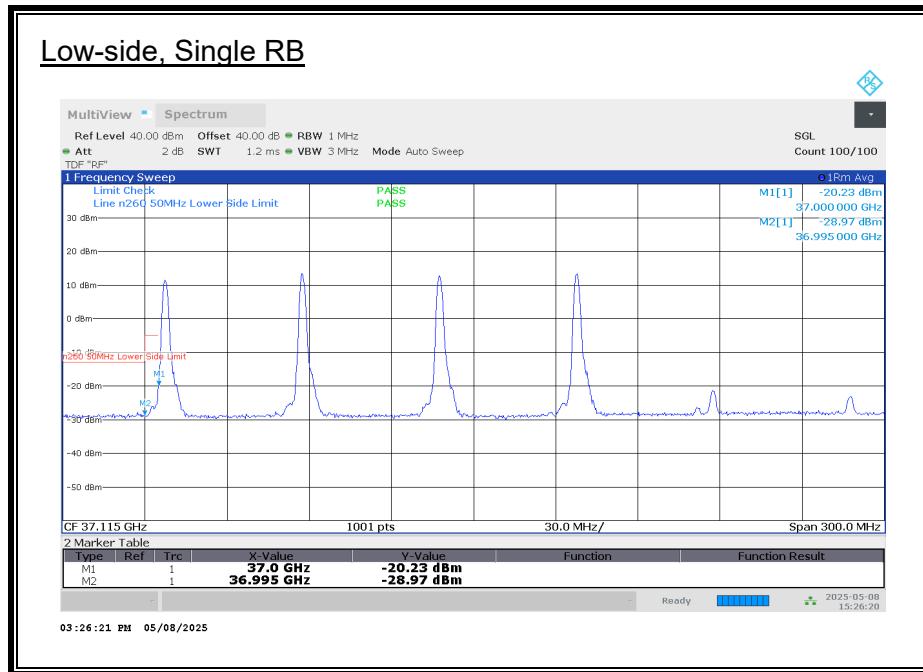

50 MHz, SISO-DUAL, 4CC, QPSK

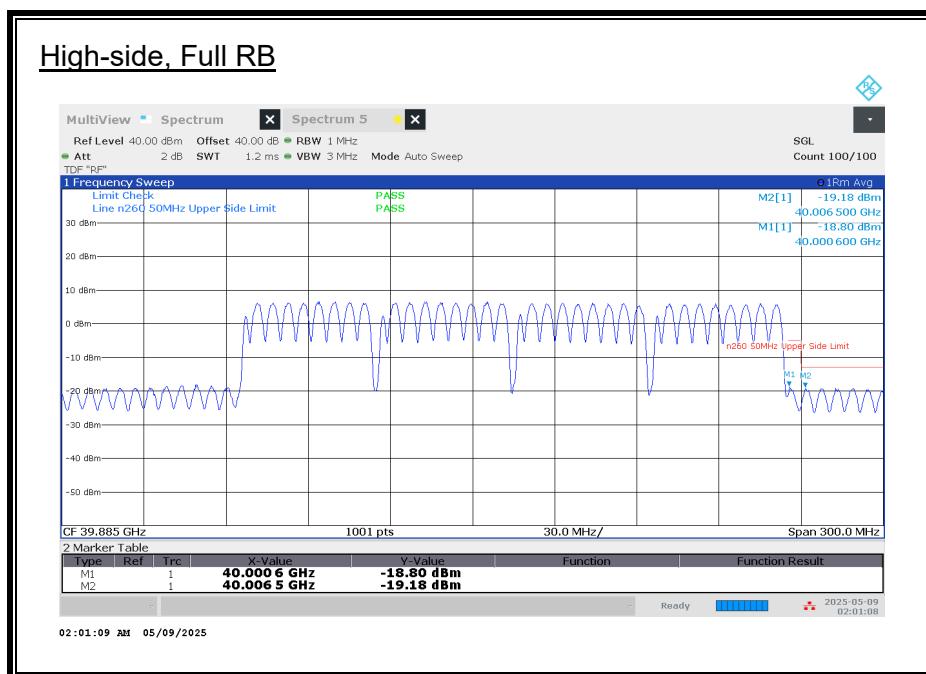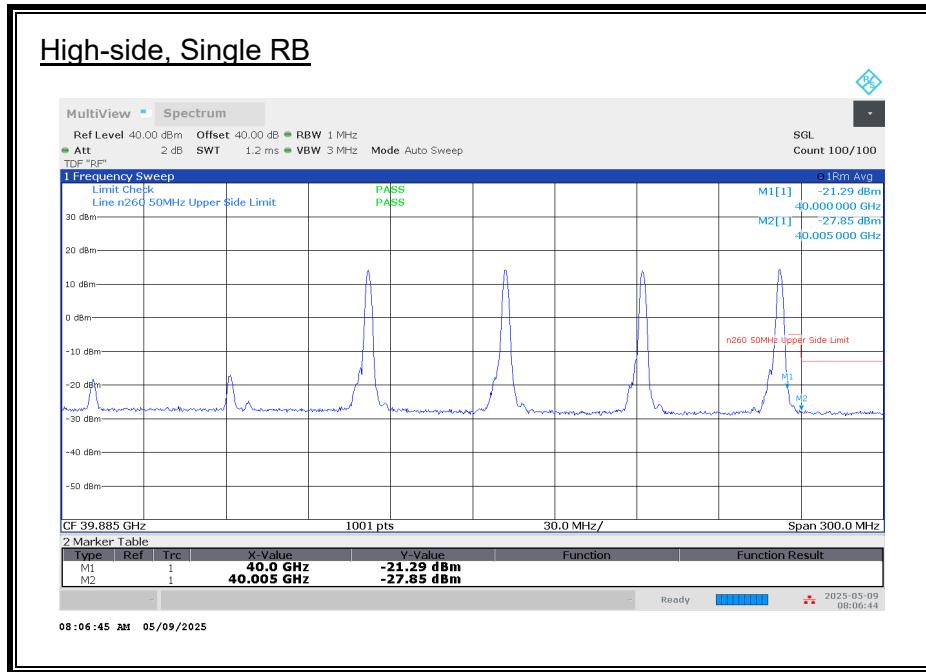

50 MHz, SISO-DUAL, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-20.23	15.00	-35.23	-5.00	-30.23
			36.995	-28.97	15.00	-43.97	-13.00	-30.97
	L	32/0	37	-21.72	15.00	-36.72	-5.00	-31.72
			36.995	-20.86	15.00	-35.86	-13.00	-22.86
	H	1/31	40	-21.29	15.00	-36.29	-5.00	-31.29
			40.005	-27.85	15.00	-42.85	-13.00	-29.85
	H	32/0	40.001	-18.80	15.00	-33.80	-5.00	-28.80
			40.007	-19.18	15.00	-34.18	-13.00	-21.18

50 MHz, SISO-DUAL, 4CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-19.74	15.00	-34.74	-5.00	-29.74
			36.995	-28.65	15.00	-43.65	-13.00	-30.65
	H	1/31	40	-21.30	15.00	-36.30	-5.00	-31.30
			40.005	-28.88	15.00	-43.88	-13.00	-30.88

50 MHz, SISO-DUAL, 4CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-20.75	15.00	-35.75	-5.00	-30.75
			36.995	-28.82	15.00	-43.82	-13.00	-30.82
	H	1/31	40	-22.42	15.00	-37.42	-5.00	-32.42
			40.005	-28.73	15.00	-43.73	-13.00	-30.73


50 MHz, SISO-DUAL, 4CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-21.45	15.00	-36.45	-5.00	-31.45
			36.995	-28.96	15.00	-43.96	-13.00	-30.96
	H	1/31	40	-23.64	15.00	-38.64	-5.00	-33.64
			40.005	-28.30	15.00	-43.30	-13.00	-30.30

100 MHz, SISO-DUAL, 4CC, QPSK



100 MHz, SISO-DUAL, 4CC, QPSK


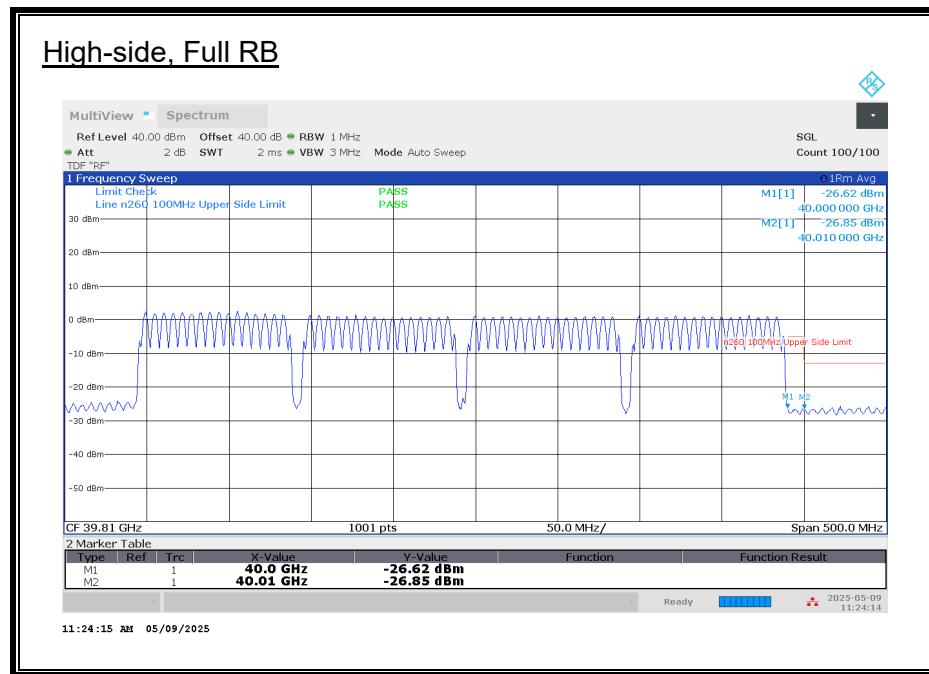


100 MHz, SISO-DUAL, 4CC, QPSK



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-17.52	15.00	-32.52	-5.00	-27.52
			36.99	-28.99	15.00	-43.99	-13.00	-30.99
	L	64/0	36.999	-25.96	15.00	-40.96	-5.00	-35.96
			36.987	-25.68	15.00	-40.68	-13.00	-27.68
	H	1/65	40	-21.84	15.00	-36.84	-5.00	-31.84
			40.01	-28.80	15.00	-43.80	-13.00	-30.80
	H	64/2	40	-26.62	15.00	-41.62	-5.00	-36.62
			40.01	-26.85	15.00	-41.85	-13.00	-28.85

8.3.29. BAND EDGE n260 MIMO 1CC

50 MHz, MIMO, 1CC, QPSK

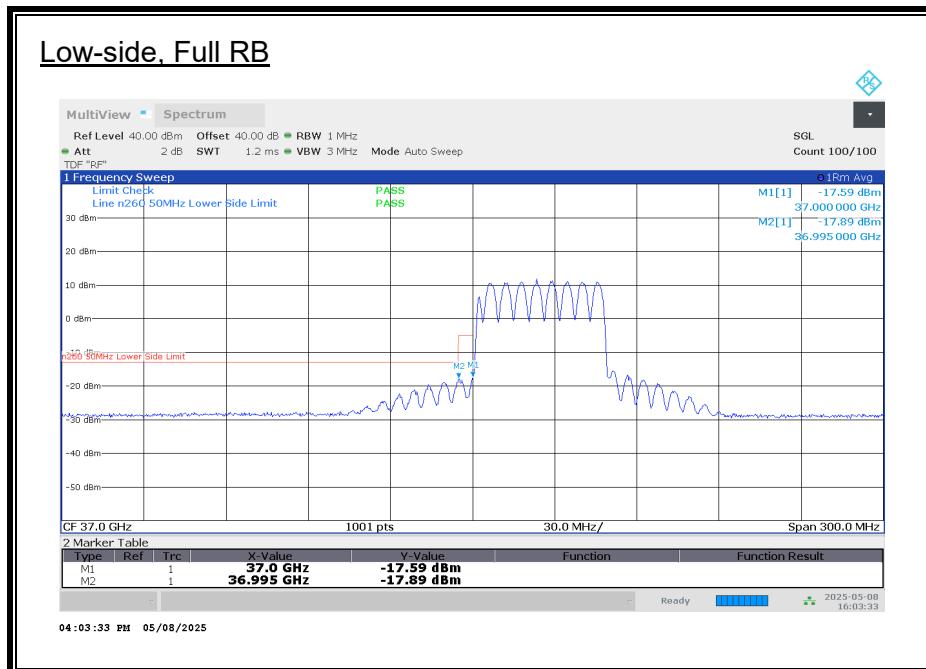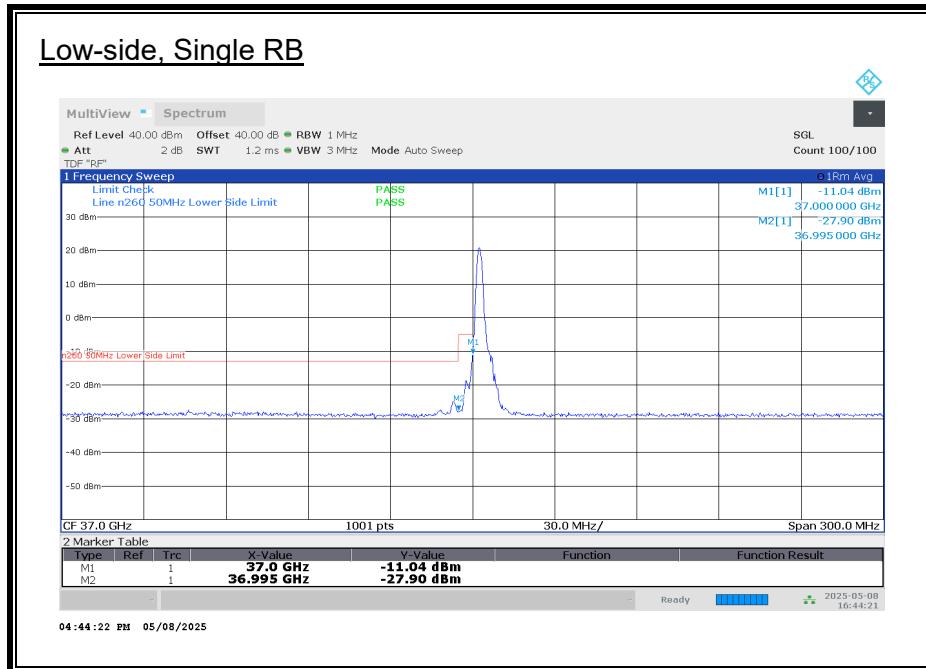



50 MHz, MIMO, 1CC, QPSK

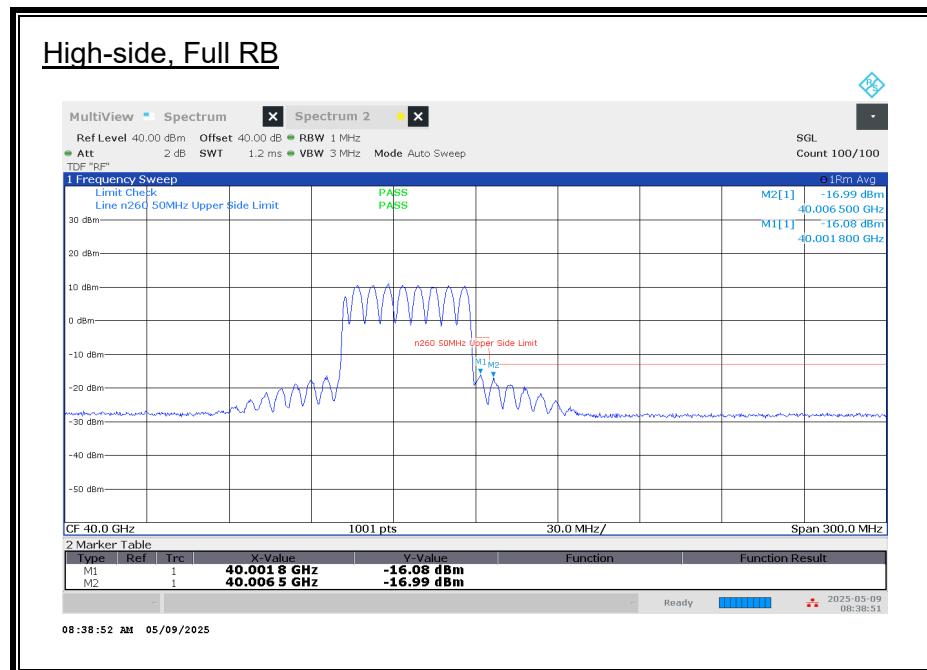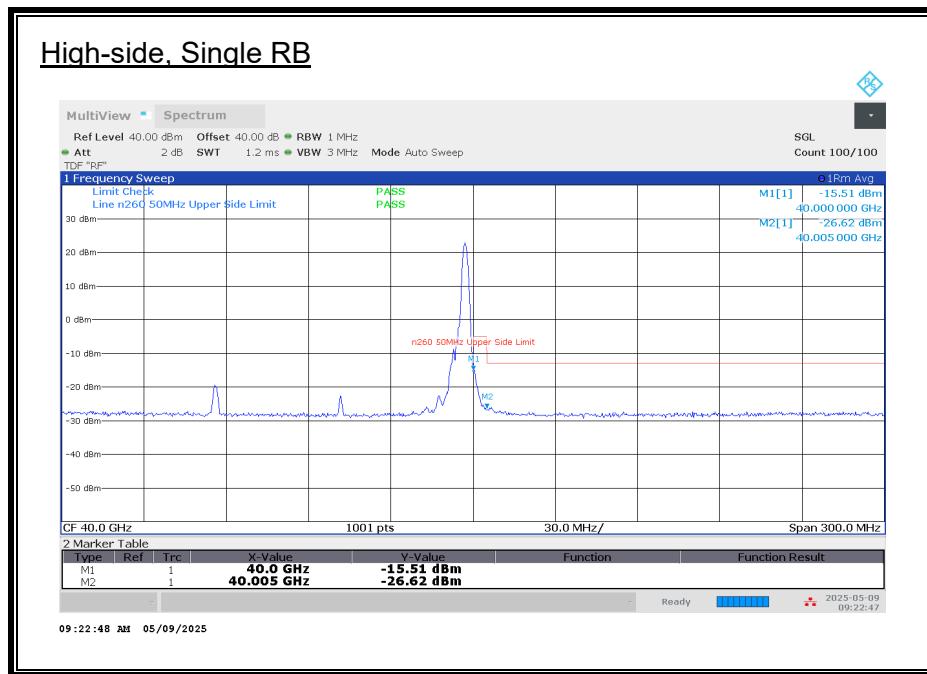


50 MHz, MIMO, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-11.04	15.00	-26.04	-5.00	-21.04
			36.995	-27.90	15.00	-42.90	-13.00	-29.90
	L	32/0	37	-17.59	15.00	-32.59	-5.00	-27.59
			36.995	-17.89	15.00	-32.89	-13.00	-19.89
	H	1/31	40	-15.51	15.00	-30.51	-5.00	-25.51
			40.005	-26.62	15.00	-41.62	-13.00	-28.62
	H	32/0	40.002	-16.08	15.00	-31.08	-5.00	-26.08
			40.007	-16.99	15.00	-31.99	-13.00	-18.99

100 MHz, MIMO, 1CC, QPSK

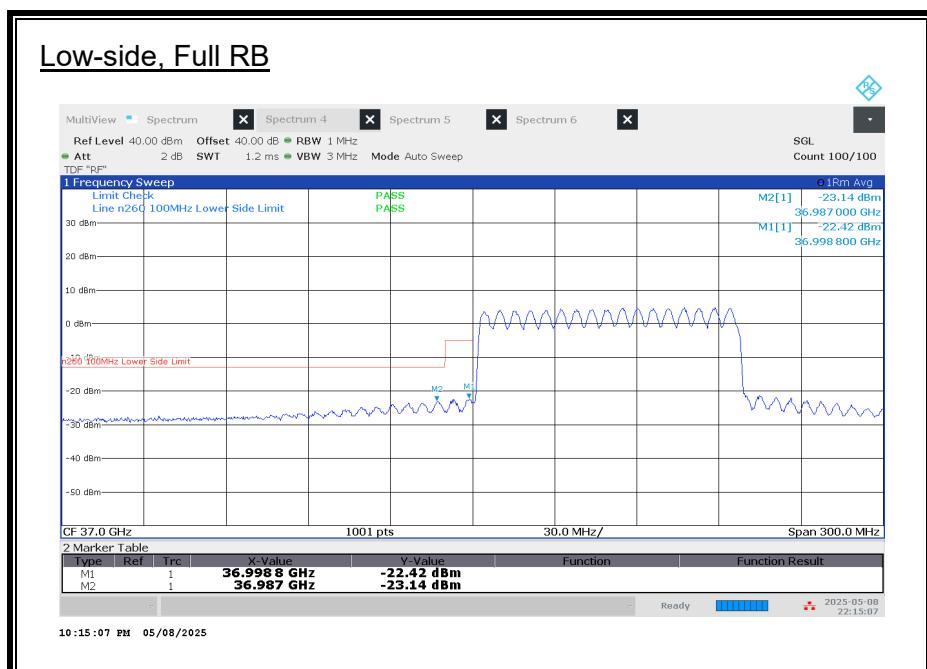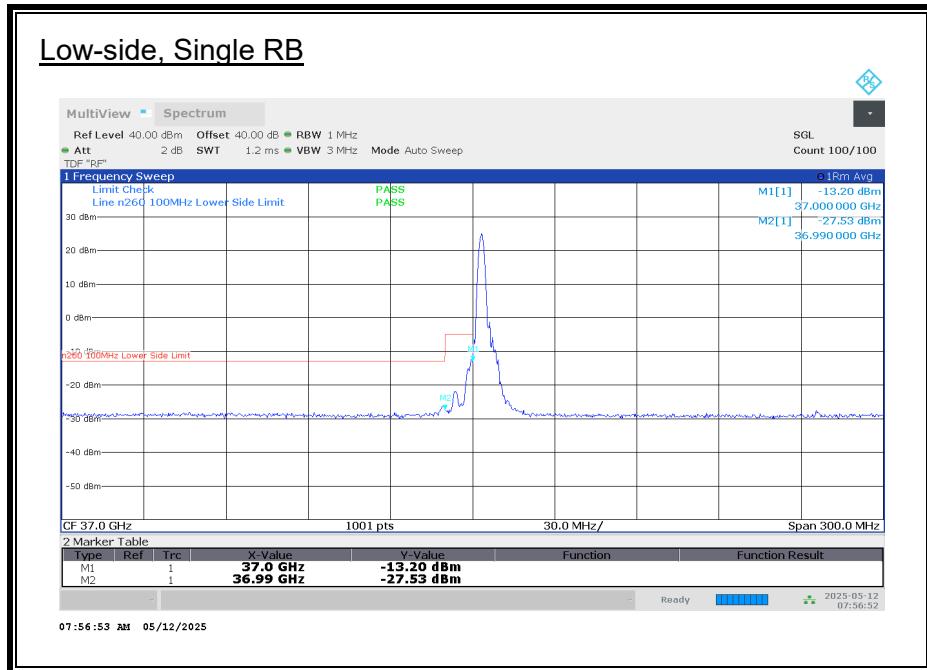

100 MHz, MIMO, 1CC, QPSK

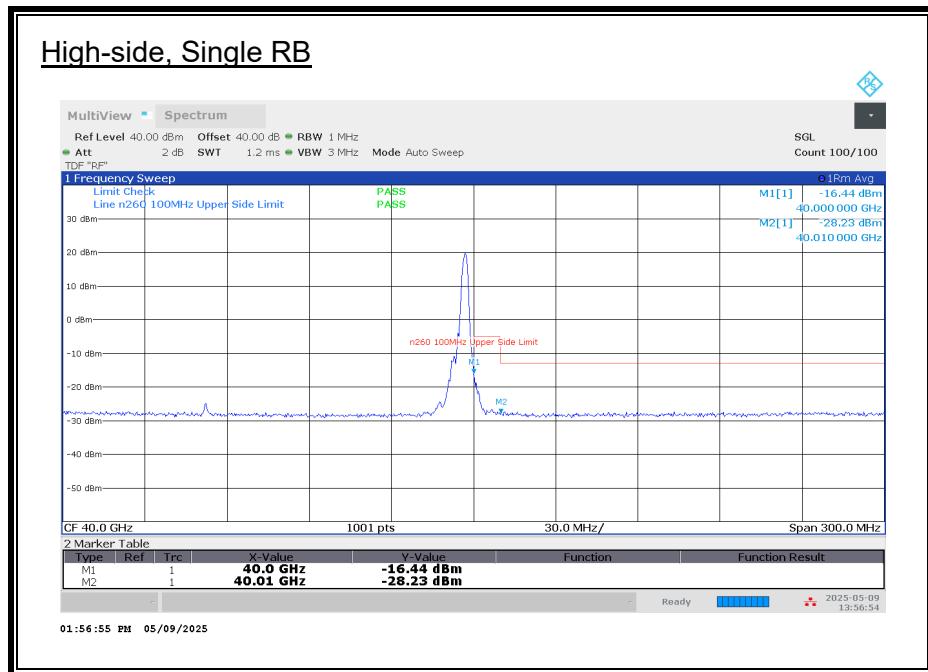


100 MHz, MIMO, 1CC, QPSK



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-13.20	15.00	-28.20	-5.00	-23.20
			36.99	-27.53	15.00	-42.53	-13.00	-29.53
	L	66/0	36.999	-22.42	15.00	-37.42	-5.00	-32.42
			36.987	-23.14	15.00	-38.14	-13.00	-25.14
	H	1/65	40	-16.44	15.00	-31.44	-5.00	-26.44
			40.01	-28.23	15.00	-43.23	-13.00	-30.23
	H	66/0	40.001	-20.94	15.00	-35.94	-5.00	-30.94
			40.012	-21.64	15.00	-36.64	-13.00	-23.64

8.3.30. BAND EDGE n260 MIMO 2CC

50 MHz, MIMO, 2CC, QPSK

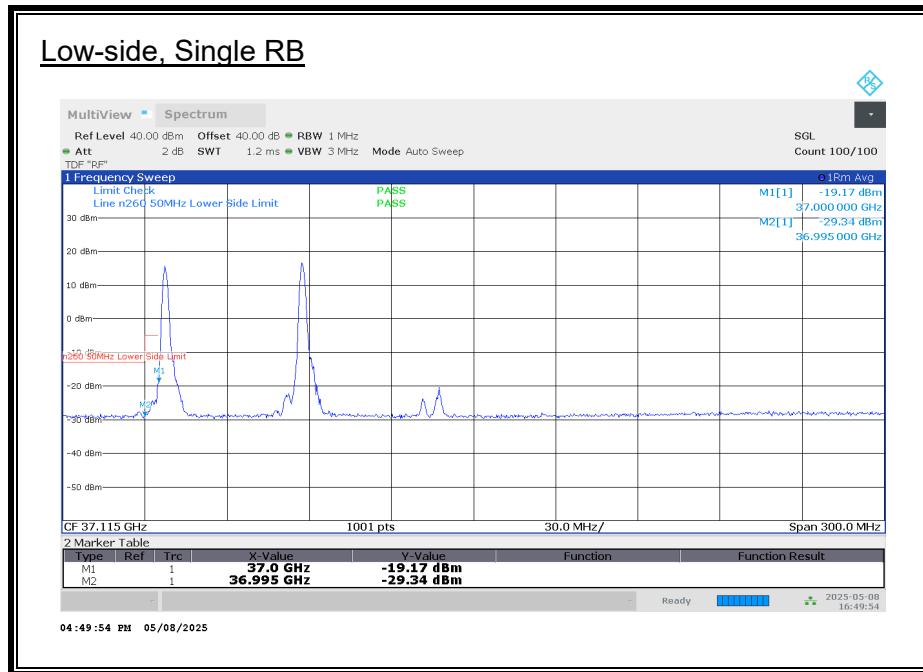



50 MHz, MIMO, 2CC, QPSK

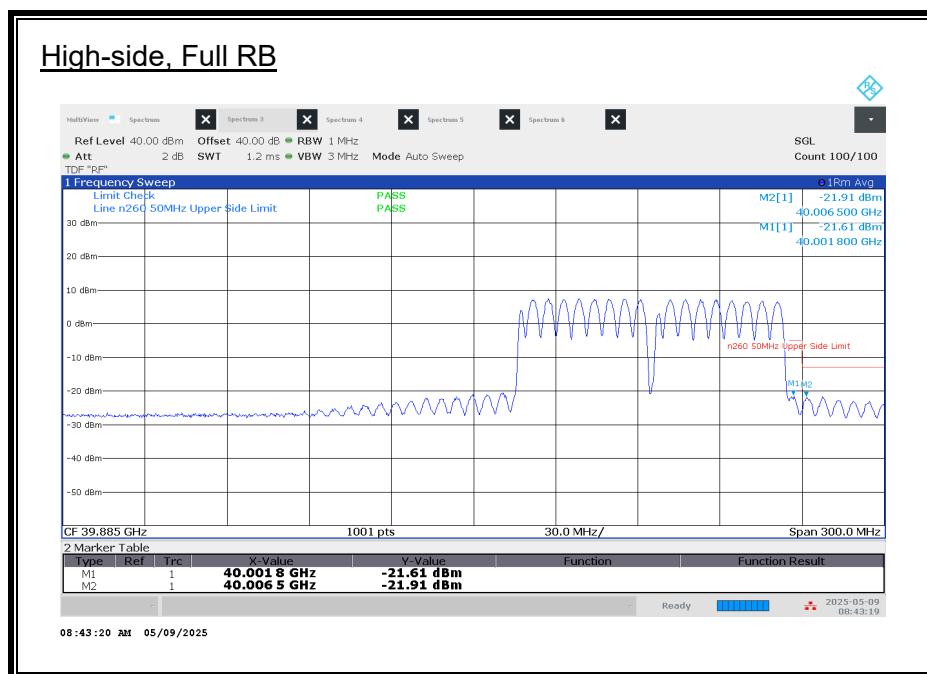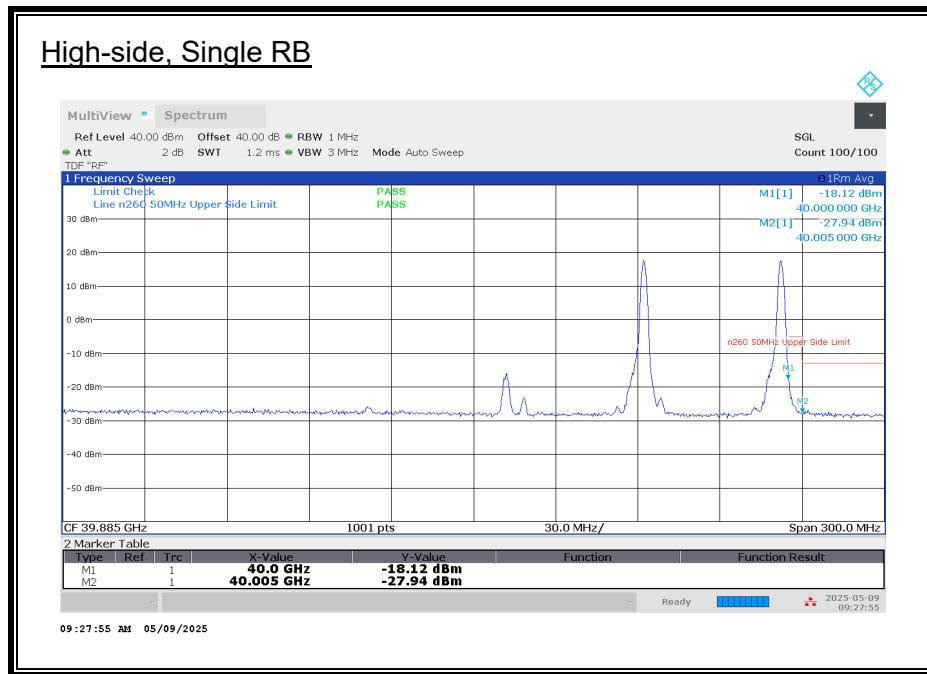


50 MHz, MIMO, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-19.17	15.00	-34.17	-5.00	-29.17
			36.995	-29.34	15.00	-44.34	-13.00	-31.34
	L	32/0	37	-22.22	15.00	-37.22	-5.00	-32.22
			36.995	-22.62	15.00	-37.62	-13.00	-24.62
	H	1/31	40	-18.12	15.00	-33.12	-5.00	-28.12
			40.005	-27.94	15.00	-42.94	-13.00	-29.94
	H	32/0	40.002	-21.61	15.00	-36.61	-5.00	-31.61
			40.007	-21.91	15.00	-36.91	-13.00	-23.91

100 MHz, MIMO, 2CC, QPSK

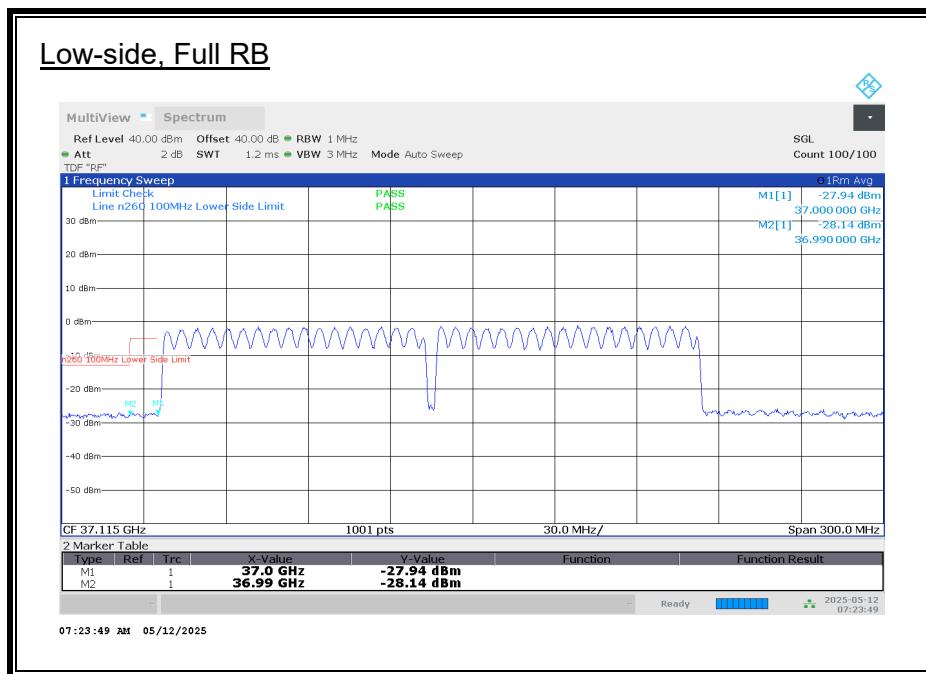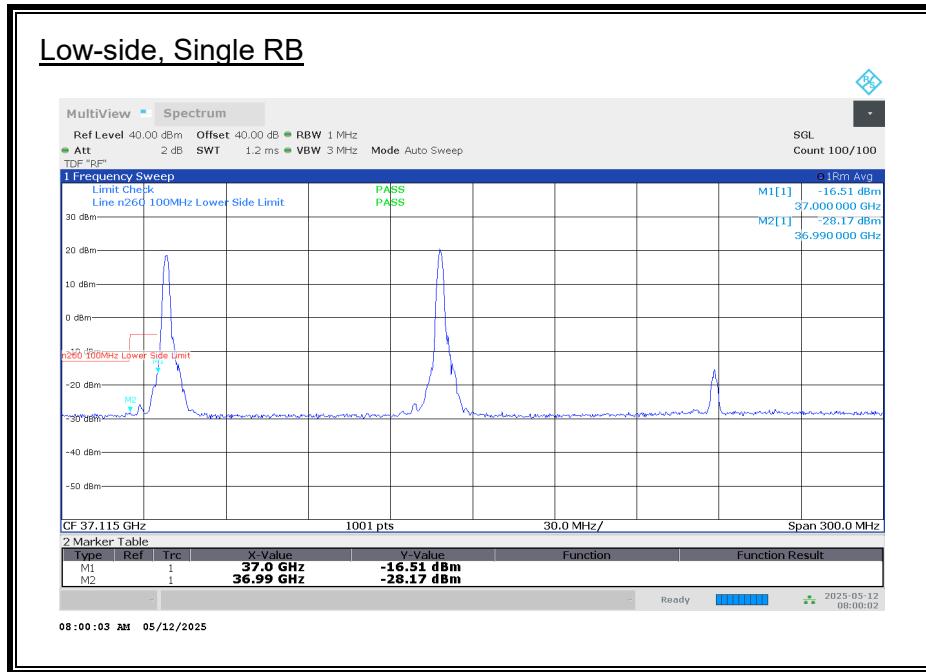

100 MHz, MIMO, 2CC, QPSK

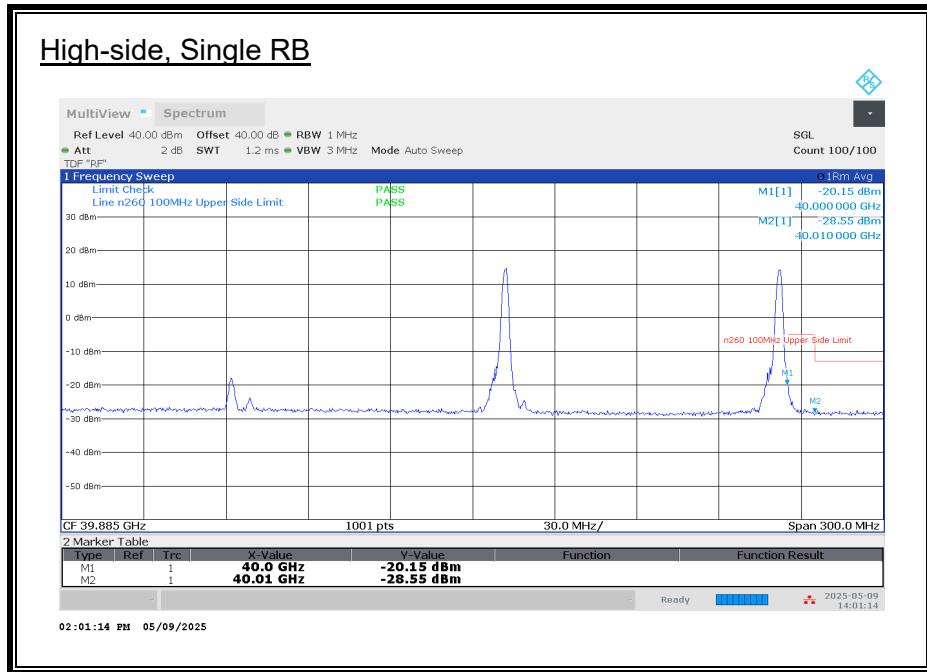


100 MHz, MIMO, 2CC, QPSK



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-16.51	15.00	-31.51	-5.00	-26.51
			36.99	-28.17	15.00	-43.17	-13.00	-30.17
	L	66/0	37	-27.94	15.00	-42.94	-5.00	-37.94
			36.99	-28.14	15.00	-43.14	-13.00	-30.14
	H	1/65	40	-20.15	15.00	-35.15	-5.00	-30.15
			40.01	-28.55	15.00	-43.55	-13.00	-30.55
	H	66/0	40.002	-25.05	15.00	-40.05	-5.00	-35.05
			40.012	-25.42	15.00	-40.42	-13.00	-27.42

8.3.31. BAND EDGE n260 MIMO 3CC

50 MHz, MIMO, 3CC, QPSK

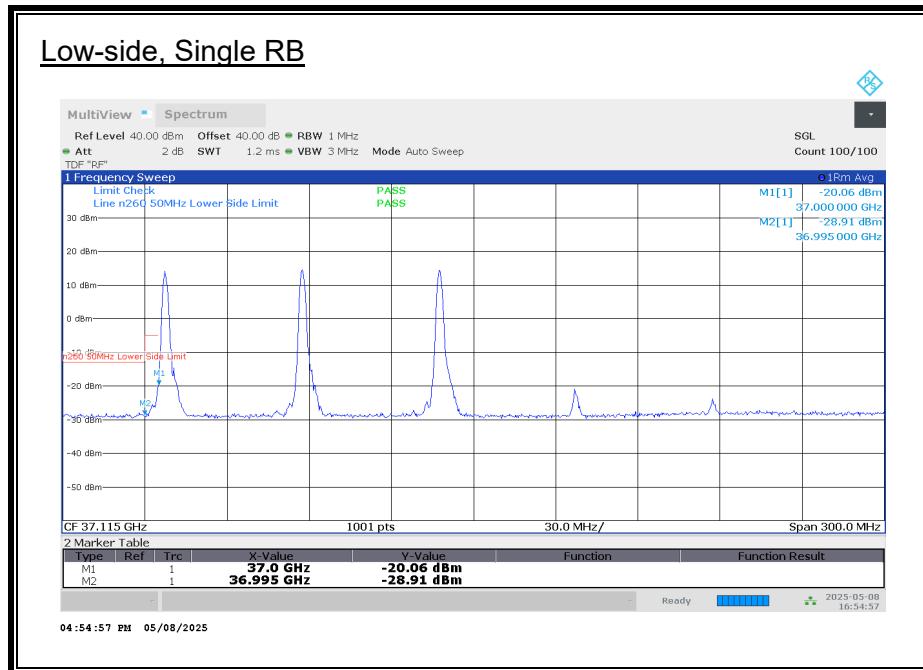



50 MHz, MIMO, 3CC, QPSK

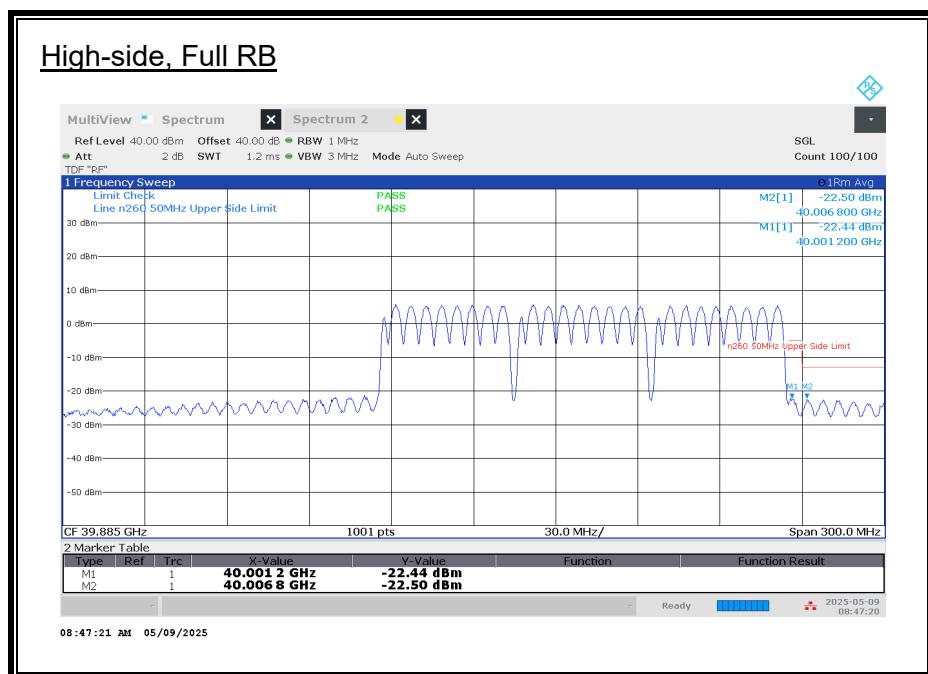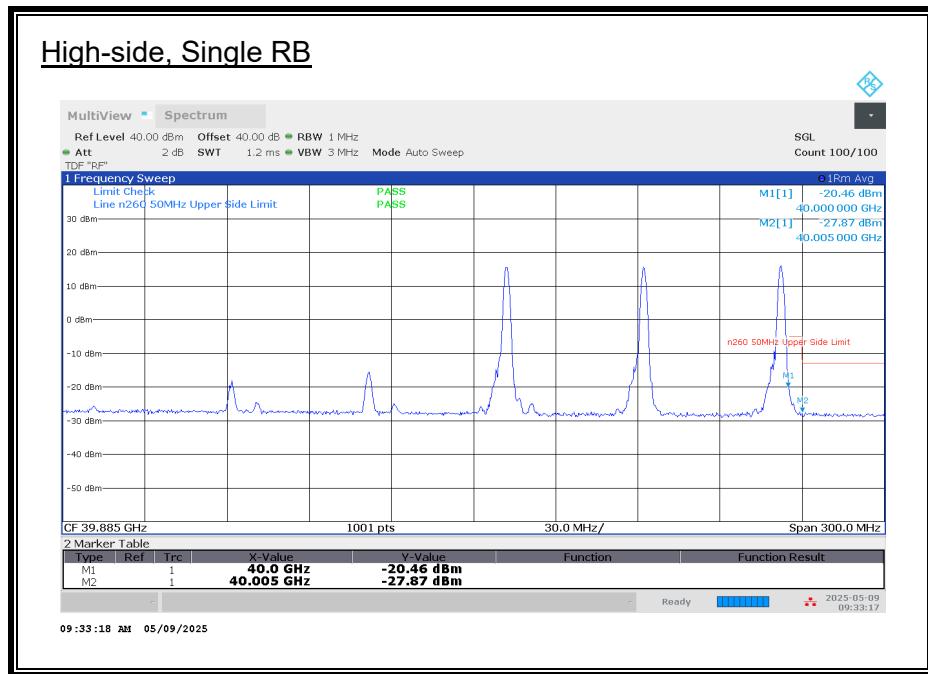



50 MHz, MIMO, 3CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-20.06	15.00	-35.06	-5.00	-30.06
			36.995	-28.91	15.00	-43.91	-13.00	-30.91
	L	32/0	37	-22.96	15.00	-37.96	-5.00	-32.96
			36.995	-23.66	15.00	-38.66	-13.00	-25.66
	H	1/31	40	-20.46	15.00	-35.46	-5.00	-30.46
			40.005	-27.87	15.00	-42.87	-13.00	-29.87
	H	32/0	40.001	-22.44	15.00	-37.44	-5.00	-32.44
			40.007	-22.50	15.00	-37.50	-13.00	-24.50

100 MHz, MIMO, 3CC, QPSK

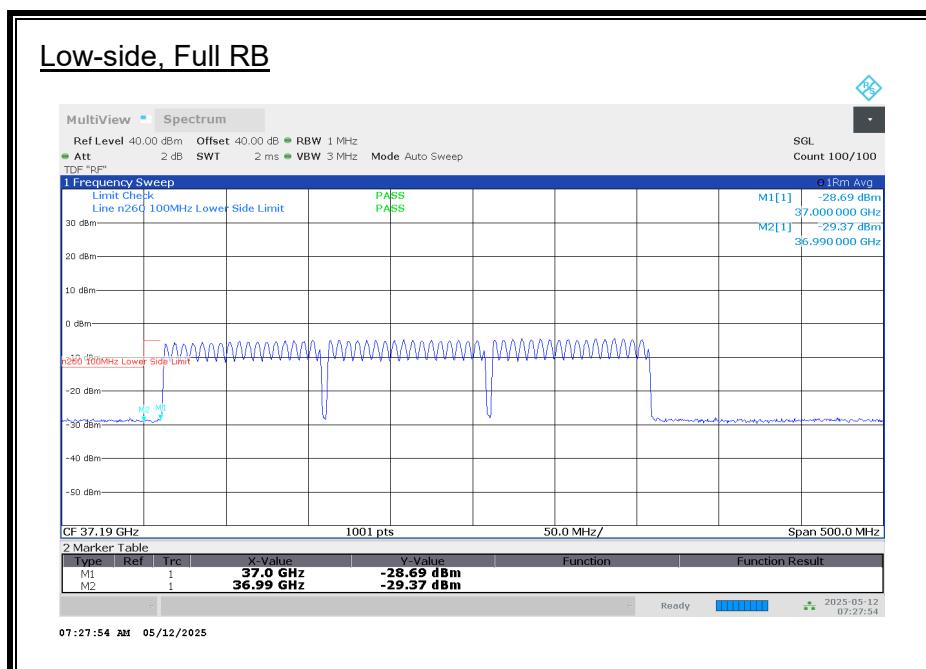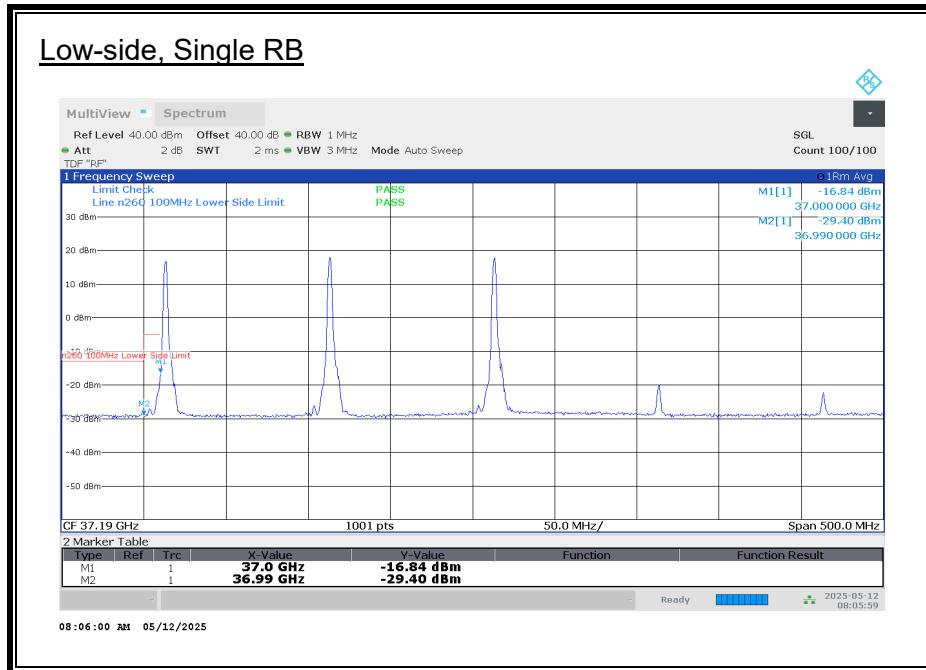

100 MHz, MIMO, 3CC, QPSK

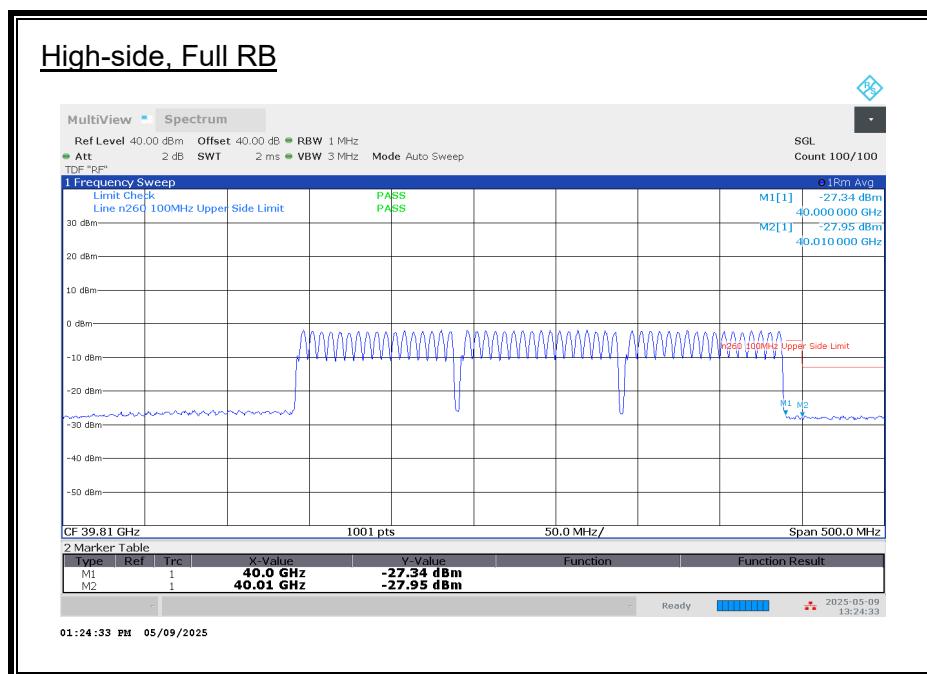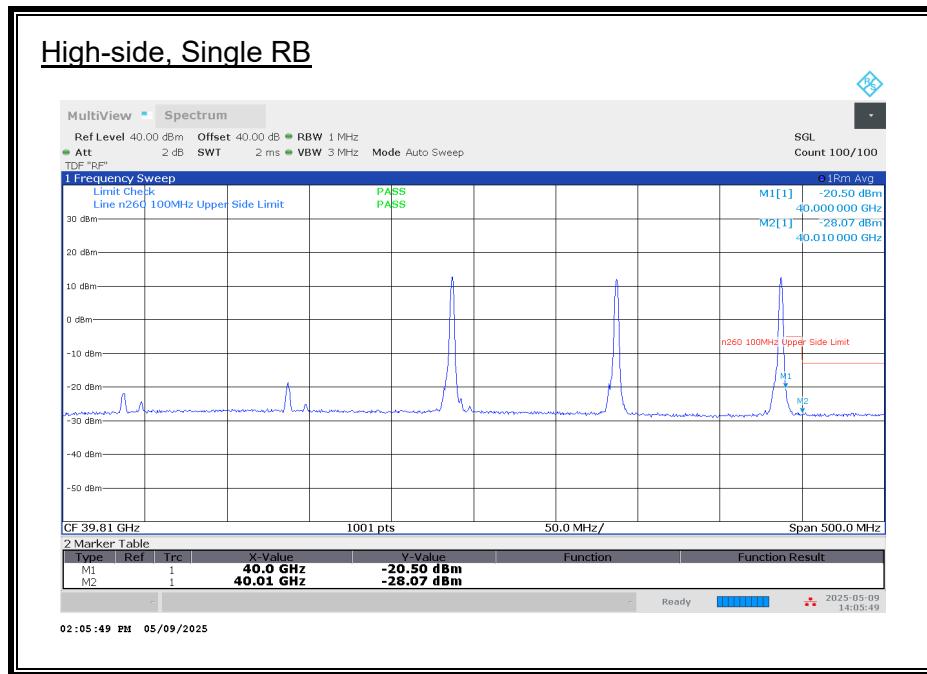


100 MHz, MIMO, 3CC, QPSK



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-16.84	15.00	-31.84	-5.00	-26.84
			36.99	-29.40	15.00	-44.40	-13.00	-31.40
	L	66/0	37	-28.69	15.00	-43.69	-5.00	-38.69
			36.99	-29.37	15.00	-44.37	-13.00	-31.37
	H	1/65	40	-20.50	15.00	-35.50	-5.00	-30.50
			40.01	-28.07	15.00	-43.07	-13.00	-30.07
	H	66/0	40	-27.34	15.00	-42.34	-5.00	-37.34
			40.01	-27.95	15.00	-42.95	-13.00	-29.95

8.3.32. BAND EDGE n260 MIMO 4CC

50 MHz, MIMO, 4CC, QPSK

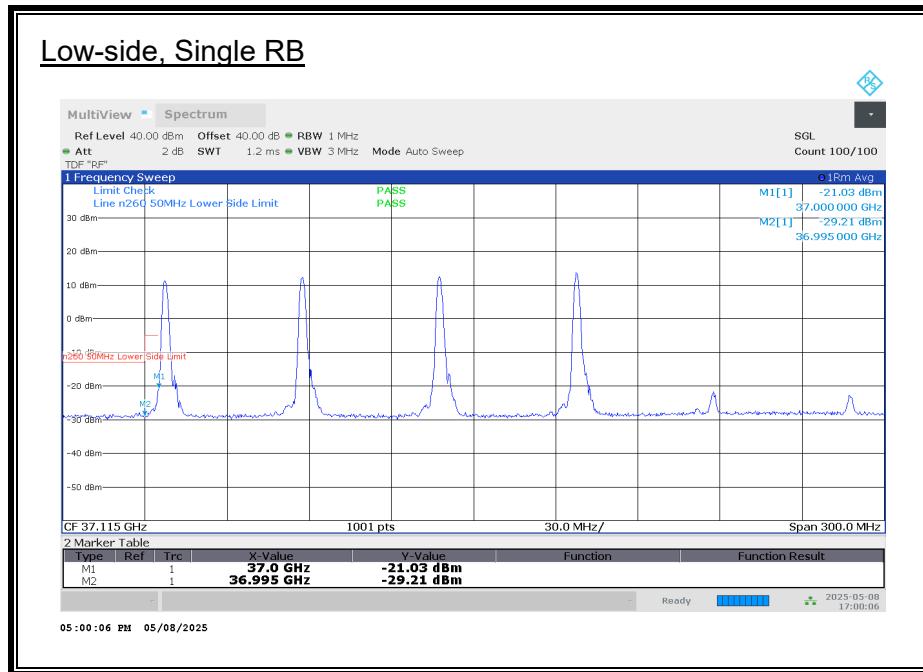


50 MHz, MIMO, 4CC, QPSK

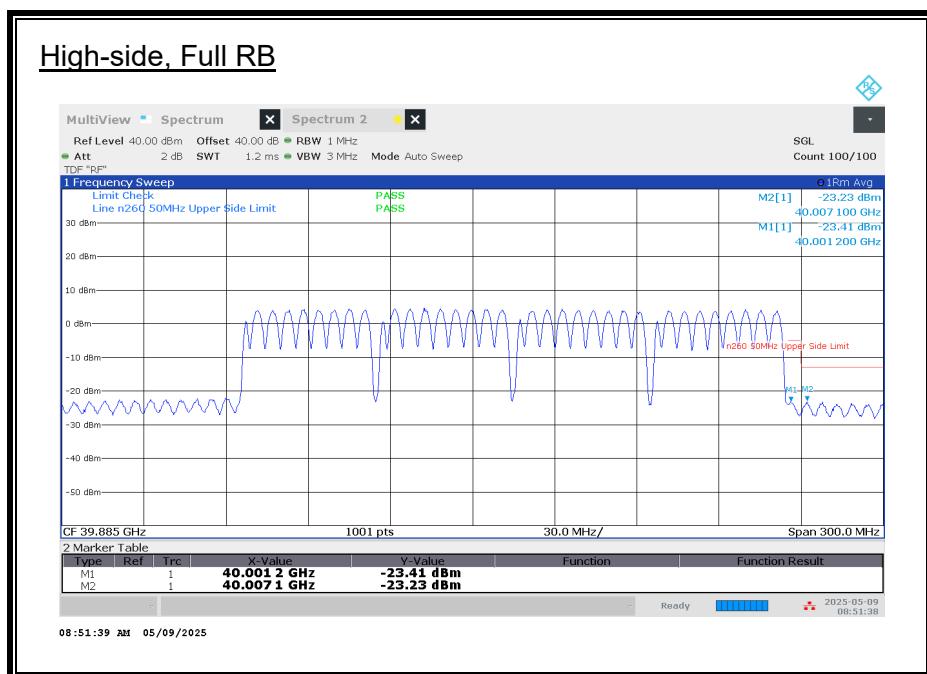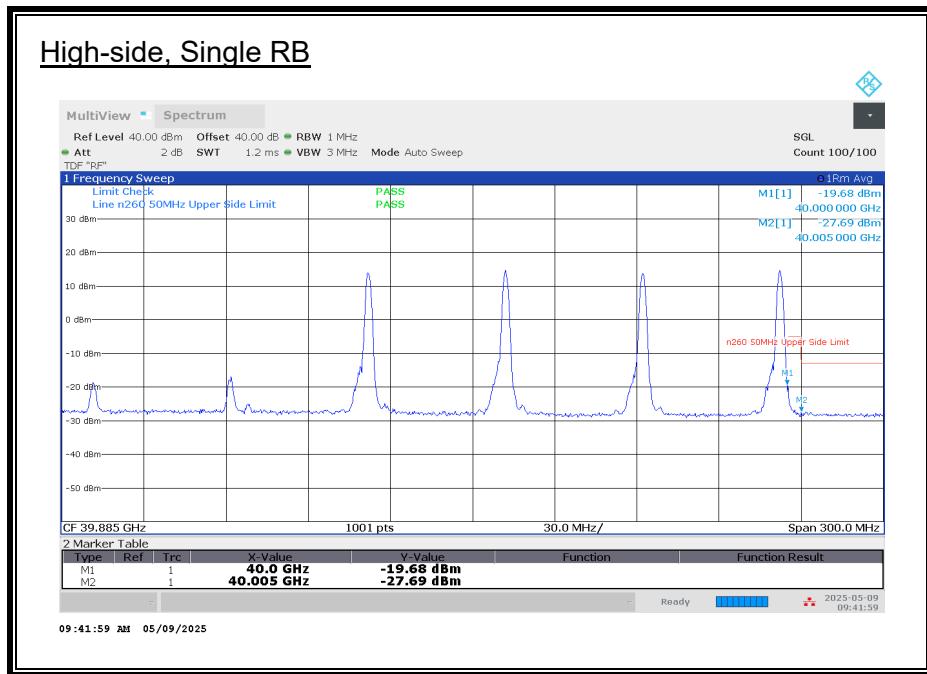



50 MHz, MIMO, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	37	-21.03	15.00	-36.03	-5.00	-31.03
			36.995	-29.21	15.00	-44.21	-13.00	-31.21
	L	32/0	37	-24.17	15.00	-39.17	-5.00	-34.17
			36.995	-23.82	15.00	-38.82	-13.00	-25.82
	H	1/31	40	-19.68	15.00	-34.68	-5.00	-29.68
			40.005	-27.69	15.00	-42.69	-13.00	-29.69
	H	32/0	40.001	-23.41	15.00	-38.41	-5.00	-33.41
			40.007	-23.23	15.00	-38.23	-13.00	-25.23

100 MHz, MIMO, 4CC, QPSK

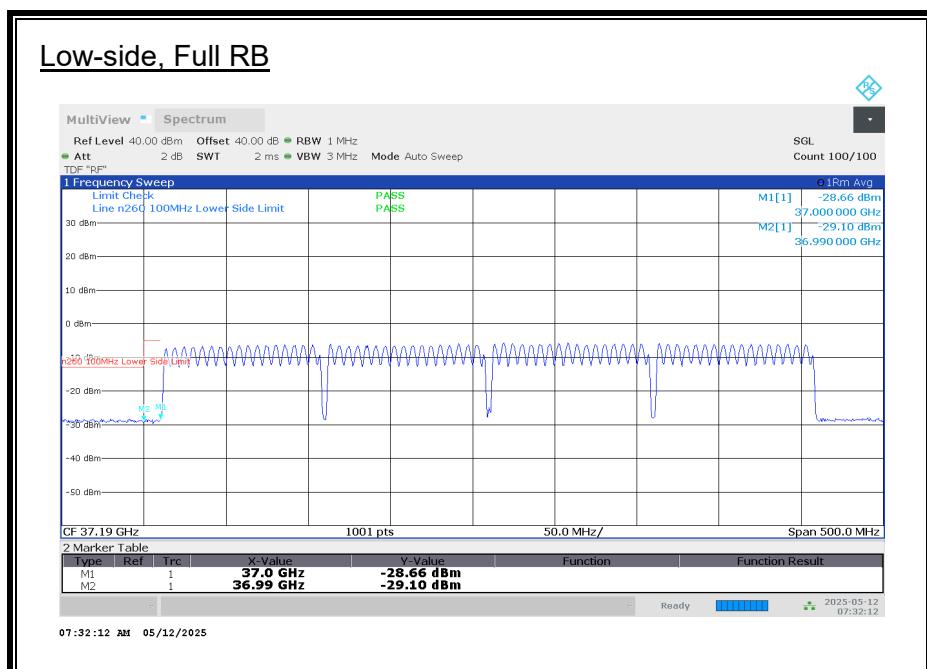

100 MHz, MIMO, 4CC, QPSK

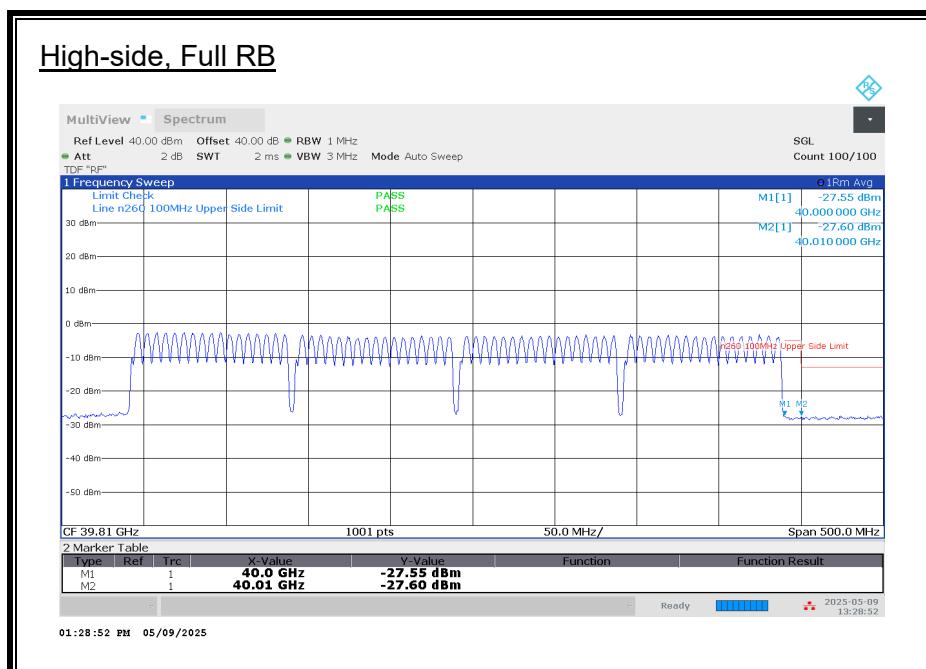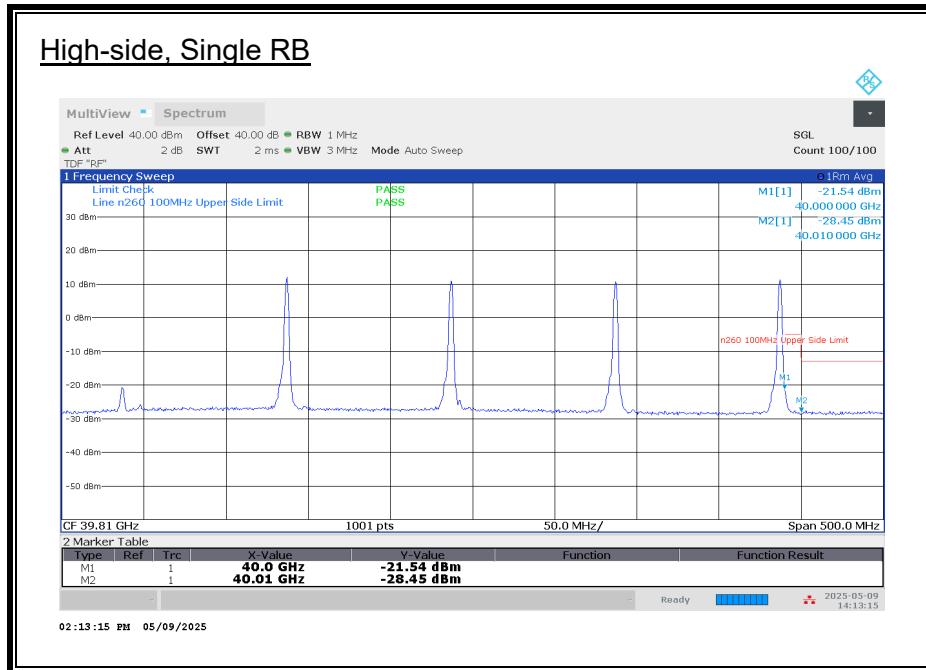

100 MHz, MIMO, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	37	-17.19	15.00	-32.19	-5.00	-27.19
			36.99	-29.52	15.00	-44.52	-13.00	-31.52
	L	66/0	37	-28.66	15.00	-43.66	-5.00	-38.66
			36.99	-29.10	15.00	-44.10	-13.00	-31.10
	H	1/65	40	-21.54	15.00	-36.54	-5.00	-31.54
			40.01	-28.45	15.00	-43.45	-13.00	-30.45
	H	66/0	40	-27.55	15.00	-42.55	-5.00	-37.55
			40.01	-27.60	15.00	-42.60	-13.00	-29.60

8.4. RADIATED SPURIOUS EMISSIONS

RULE PART(S)

FCC: §2.1051, §2.957(f), §30.203

LIMIT

30.203(a) - The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower.

30.203(d)(1) - For licensees operating mobile equipment in the 24.25-24.45 GHz or 24.75-25.25 GHz bands, the maximum conducted output power or the total radiated power of emissions in any 200 MHz of the 23.6-24.0 GHz band shall not exceed -33 dBW (for base stations) or -29 dBW (for mobile stations).

30.203(d)(2) - For mobile equipment brought into use after September 1, 2027, the maximum conducted output power or the total radiated power of emissions in any 200 MHz of the 23.6-24.0 GHz band shall not exceed -39 dBW (for base stations) or -35 dBW (for mobile stations). If equipment brought into use on or prior to September 1, 2027 is replaced, or modified in a manner that changes the emissions characteristics of the equipment, the equipment must then comply with the emissions limits in this paragraph (d).

TEST PROCEDURE

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.4.2 and Section 4.4.3.
ANSI C63.26-2015 Clause 5.5 and Annex C.5.2.

All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits to demonstrate compliance.

Based on the pre-scan test results, the readings of emission in 9 kHz – 30 MHz range are attenuated more than 20 dB below the limit, therefore RSE was further investigated from 30 MHz – 100 GHz on n258 SB1, n258 SB2 and n261 bands, from 30 MHz – 200 GHz on n260 band.

Plots below 18 GHz are corrected field strength levels, measured at 3-meter test distance. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $E (dB\mu V/m) = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement.

RSEs from 1 – 200 GHz were measured at 1.5 meters height.

RSEs above 18 GHz were measured at the appropriate far field distances listed on Section 5 on this report (FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE). RSEs from 18 – 50 GHz were measured using a spectrum analyzer or EMI receiver with an internal preamplifier when applicable. Emissions above 50 GHz were measured using a downconverter with spectrum analyzer, while an external LNA was used when applicable.

EIRP of RSE was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factor of cable/waveguide extension loss, horn antenna gain, downconverter loss, LNA gain, and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} - \text{LNA Gain (dB)} \\ &\quad + \text{Downconverter Loss (dB)} + \text{Path Loss (dB)} \\ &= 4 - 23 - 30 + 8 + 71 \\ &= 30 \text{ dB}\end{aligned}$$

EIRP = $P_{\text{measured}}(\text{dBm})$, where Total Correction Factor preloaded.

Calculation of test limits of 30.203(d)(1) & (2) for 24.25-24.45 GHz or 24.75-25.25 GHz bands:

Total radiated power of emissions in any 200 MHz of the 23.6-24.0 GHz band shall not exceed -29 dBW and -35 dBW.

$$P(\text{dBm}) = P(\text{dBW}) - 30$$

Therefore,

$$-29 \text{ dBW}/200 \text{ MHz} = 1 \text{ dBm}/200 \text{ MHz}$$

$$-35 \text{ dBW}/200 \text{ MHz} = -5 \text{ dBm}/200 \text{ MHz}$$

By RBW compensation, $10^{\star}\log(1\text{MHz}/200\text{MHz}) = -23.1 \text{ dB}$

Hence, Test Limits:

$$1 \text{ dBm}/200 \text{ MHz} = -22 \text{ dBm}/\text{MHz} \text{ for 30.203(d)(1)}$$

$$-5 \text{ dBm}/200\text{MHz} = -28 \text{ dBm}/\text{MHz} \text{ for 30.203(d)(2)}$$

RSEs were measured using the configuration with the highest EIRP (QPSK, SISO-Dual mode and a single mid-RB) as representing the worst case. Preliminary radiated emissions tests at the low, middle, and high channels indicated that the worst case radiated spurious emissions were on the channel with the highest EIRP, therefore only the test data for that channel is included in this report.

The following configurations with highest EIRP from Ant M1 in each frequency band were used at RSE investigation at the pre-determined worst-case y-axis (portrait) orientation:

n258 SB1 band: SISO-DUAL_QPSK_50 MHz BW_Low CH_RB Offset 1/15 (1RB-M)

n258 SB2 band: SISO-DUAL_QPSK_50 MHz BW_High CH_RB Offset 1/15 (1RB-M)

n261 band: SISO-DUAL_QPSK_50 MHz BW_Mid CH_RB Offset 1/15 (1RB-M)

n260 band: SISO-DUAL_QPSK_100 MHz BW_High CH_RB Offset 1/32 (1RB-M)

In addition, the 2CC to 4CC multi-carrier operations were verified for IMD products at the near upper and lower band edge regions, approximately 1 GHz wide. The measurements were made with the single RB active in each channel and plots showing the IMD products are provided. Both (50 MHz + 50 MHz) and (100 MHz + 100 MHz) channel bandwidths are tested

and the signal level of the IMD products are similar for both modes. Antenna gain of EUT is not factored into the EIRP calculation of IMD product measurements. The test data for the worst case IMD emissions are reported.

Where the measured EIRP value is above the TRP limit, a TRP measurement is performed. Otherwise, the EIRP value is compared with the §30.203 TRP limits to demonstrate compliance.

The TRP measurement is based on the spherical grid method stated in Clause 4.4.3.3.4 of KDB842590 D01. By choosing the max sampling grid step size ($\Delta\theta = \Delta\theta_{\max} = 15^\circ$ & $\Delta\phi = \Delta\phi_{\max} = 15^\circ$), Sparsity Factor SF = SF_{max}, as described in Appendix A. This results in a TRP correction (ΔTRP) of 1 dB when SF_{max} > 1 (i.e. $\Delta\theta > \Delta\theta_{\text{ref}}$ and $\Delta\phi > \Delta\phi_{\text{ref}}$). ΔTRP is then added to the actual measurement as shown in the tables for the TRP data.

EUT Dimension (est.): 0.9cm (d) x 7.2cm (w) x 15cm (h)

Examples of sampling grid calculation of EUT:

Example 1		Example 2	
d (cm)	0.9	d (cm)	0.9
w (cm)	7.2	w (cm)	7.2
h (cm)	15	h (cm)	15
Frequency (MHz)	40000	Frequency (MHz)	120000
Wavelength, λ (cm)	0.75	Wavelength, λ (cm)	0.25
Vertical sampling	Horizontal sampling	Vertical sampling	Horizontal sampling
D = 16.66	D _{cyl} = 7.26	D = 16.66	D _{cyl} = 7.26
D/ λ = 22.22	D _{cyl} / λ = 9.67	D/ λ = 66.65	D _{cyl} / λ = 29.02
$\Delta\theta_{\text{ref}}^\circ = 2.58$	$\Delta\phi_{\text{ref}}^\circ = 5.93$	$\Delta\theta_{\text{ref}}^\circ = 0.86$	$\Delta\phi_{\text{ref}}^\circ = 1.98$
$\Delta\theta^\circ = 15$	$\Delta\phi^\circ = 15$	$\Delta\theta^\circ = 15$	$\Delta\phi^\circ = 15$
$\Delta\theta_{\max}^\circ = 15$	$\Delta\phi_{\max}^\circ = 15$	$\Delta\theta_{\max}^\circ = 15$	$\Delta\phi_{\max}^\circ = 15$
SF = SF _{max} = Max of (15/15, 15/15) = 1		SF = SF _{max} = Max of (15/15, 15/15) = 1	

By applying spherical grid method on TRP measurement, the TRP value of the emissions is calculated using multiple EIRP measurements from the below formula as described in Appendix B of KDB842590 D01:

$$\text{TRP}_{\text{grid}, f_n} \approx \frac{1}{4\pi} \iint_{4\pi} \text{EIRP}(\theta, \phi) f_n \sin\theta d\theta d\phi \approx \frac{\Delta\theta \Delta\phi}{4\pi} \sum_{m,n} \text{EIRP}(\theta_m, \phi_n) f_n |\sin\theta_m|$$

For the investigations of simultaneous transmission of multiple wireless technologies in the LTE B2 + 5G FR2 bands and 5.8 GHz Wi-Fi + 5G FR2 bands, no noticeable new emission with high amplitude was found.

RESULTS

See the following pages.


Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479

Test Date: 05/12/2025 – 06/17/2025

Test Location Below 18 GHz: 04-RDE-L

Test Locations Above 18 GHz: 01-mmW-A, -B, -C & -D

8.4.1. RSE n258 SB1 30 – 1000 MHz

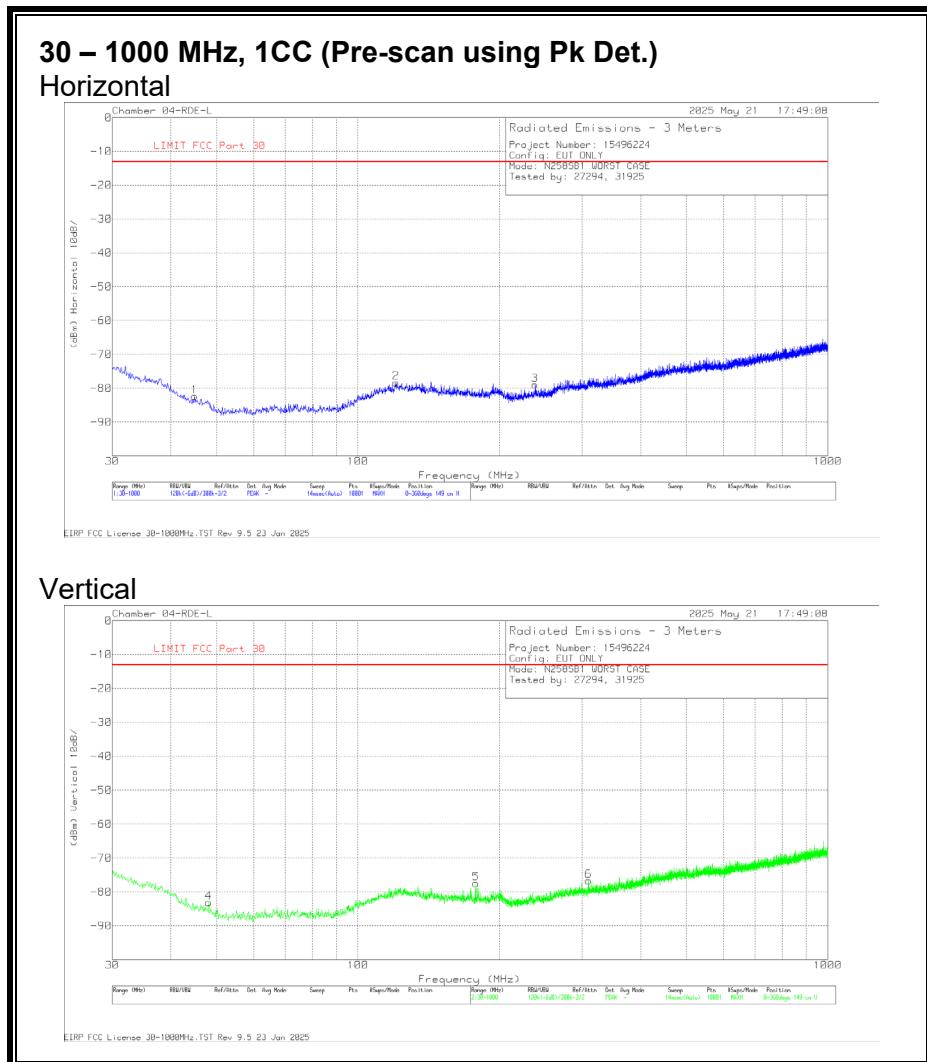


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ACF (dB/m)	Amp/CbIs (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	44.938	-79.11	Pk	16.3	-31.3	11.7	-82.41	-13	-69.41	0-360	149	H
2	120.501	-79.11	Pk	19.6	-30.5	11.7	-78.31	-13	-65.31	0-360	149	H
3	238.356	-78.13	Pk	17.4	-30.0	11.7	-79.03	-13	-66.03	0-360	149	H
4	48.139	-78.20	Pk	14.6	-31.2	11.7	-83.10	-13	-70.10	0-360	149	V
5	178.119	-76.33	Pk	17.2	-30.1	11.7	-77.53	-13	-64.53	0-360	149	V
6	309.263	-78.52	Pk	19.7	-29.6	11.7	-76.72	-13	-63.72	0-360	149	V

Pk - Peak detector

8.4.2. RSE n258 SB1 1 - 18 GHz


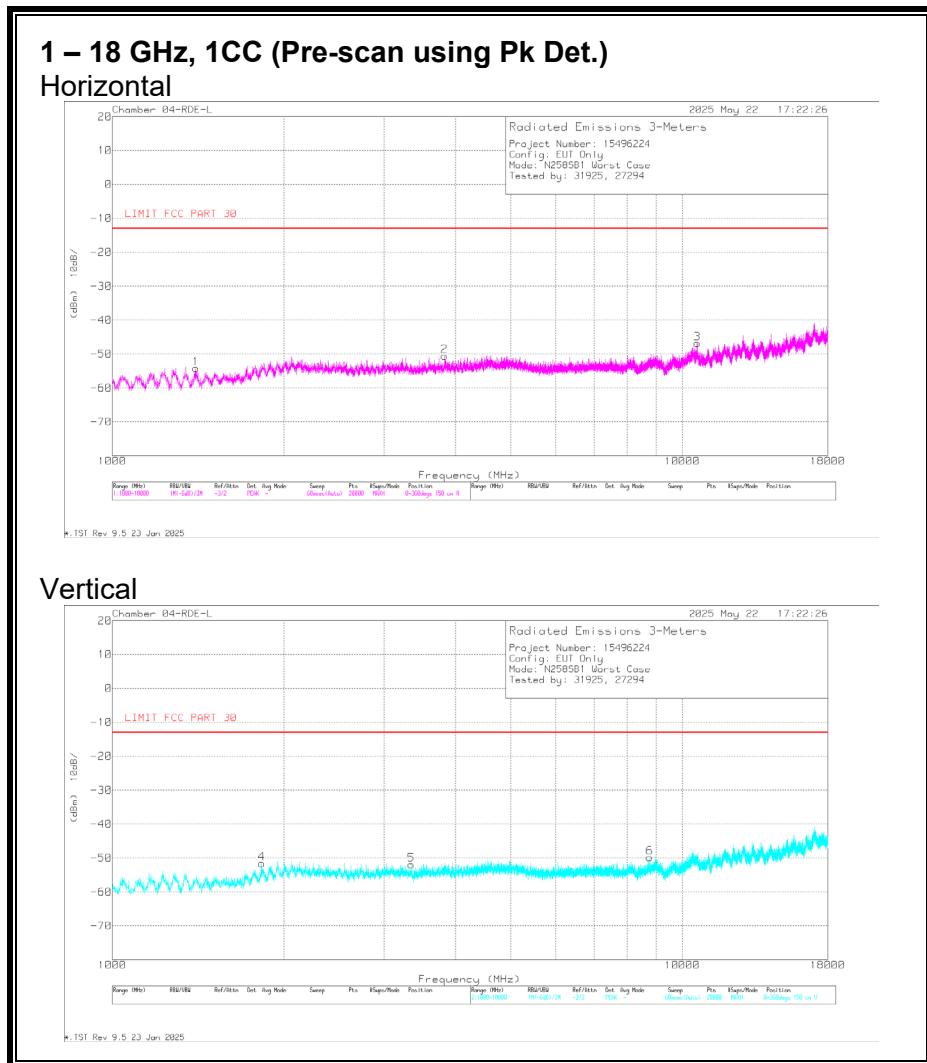


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1402.070	-47.31	Pk	28.2	-46.8	11.7	-54.21	-13	-41.21	0.360	150	H
2	3826.393	-51.05	Pk	33.4	-44.6	11.7	-50.55	-13	-37.55	0.360	150	H
3	10622.487	-60.08	Pk	37.9	-36.4	11.7	-46.88	-13	-33.88	0.360	150	H
4	1829.642	-47.07	Pk	30.2	-46.4	11.7	-51.57	-13	-38.57	0.360	150	V
5	3347.819	-51.07	Pk	32.6	-45.2	11.7	-51.97	-13	-38.97	0.360	150	V
6	8771.943	-56.28	Pk	35.8	-41.1	11.7	-49.88	-13	-36.88	0.360	150	V

Pk - Peak detector

8.4.3. RSE n258 SB1 18 - 23 GHz

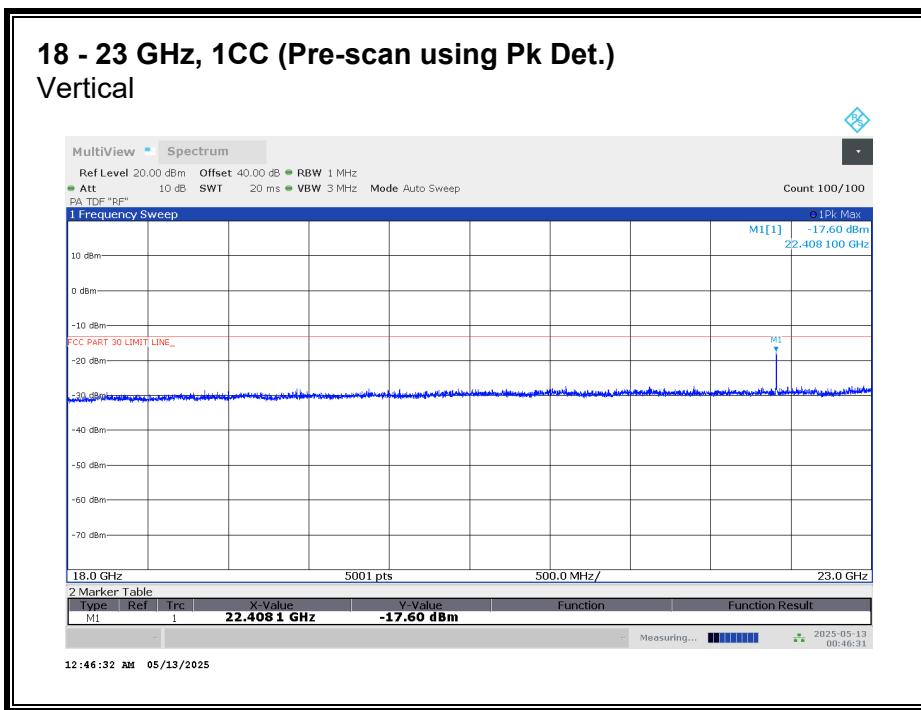
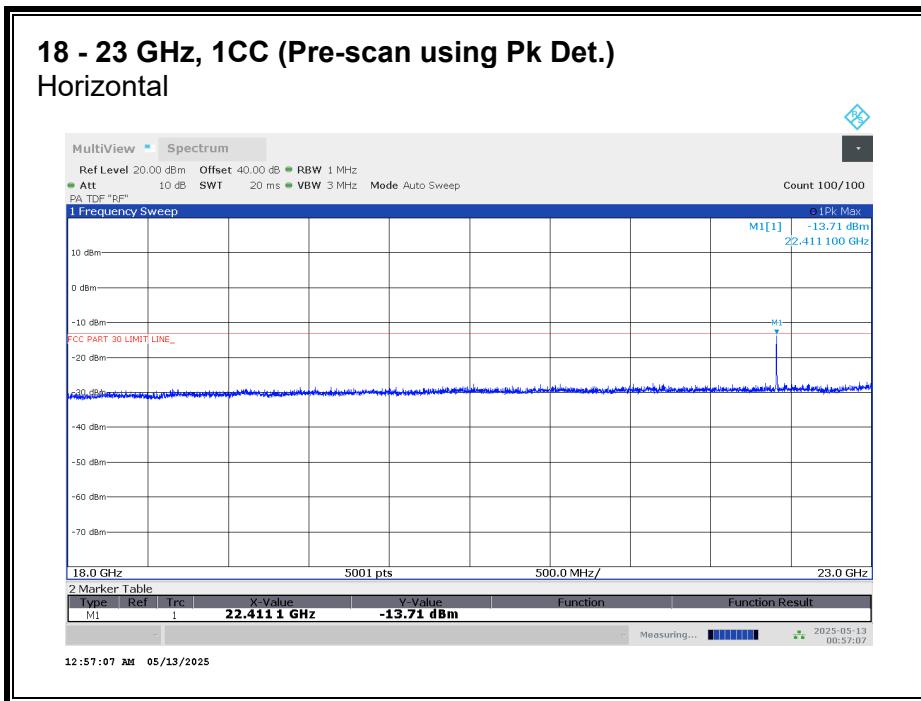


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

18 - 23 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
22.410	3.3	H	-21.08	-13	-8.08
22.410	3.3	V	-24.95	-13	-11.95

8.4.4. RSE n258 SB1 23 - 24.25 GHz

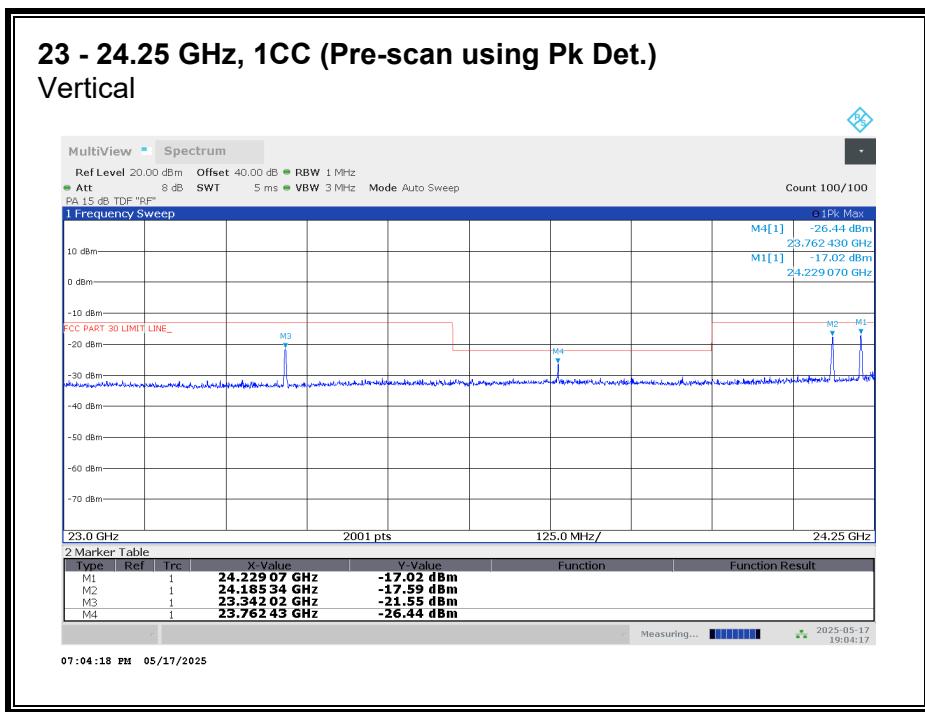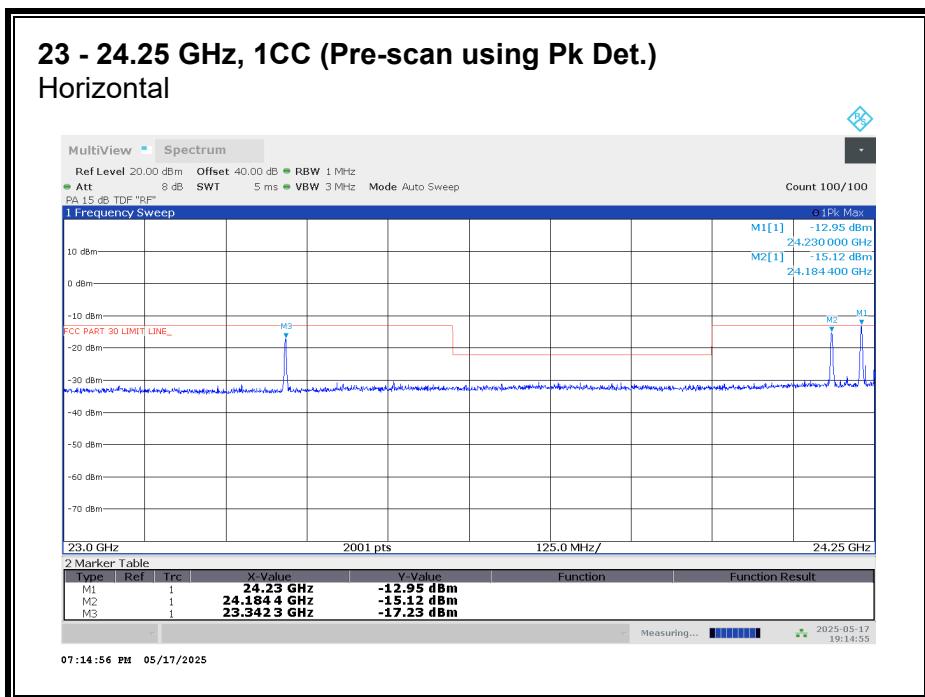


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

23 - 24.25 GHz n258 SB1, 1CC

Freq. (GHz)	Meas. Distance (m)	Rx Ant. Polarity	Corrected Avg EIRP (dBm)	TRP Limit (dBm)	Margin (dB)
24.229	3.3	H	-16.36	-13	-3.36
24.229	3.3	V	-24.01	-13	-11.01
24.184	3.3	H	-23.27	-13	-10.27
24.184	3.3	V	-28.26	-13	-15.26
23.342	3.3	H	-19.74	-13	-6.74
23.342	3.3	V	-33.88	-13	-20.88
23.762*	3.3	H	-41.83	-22	-19.83
23.762*	3.3	V	-39.77	-22	-17.77
23.762*	3.3	H	-41.83	-28	-13.83
23.762*	3.3	V	-39.77	-28	-11.77

*Emission results comply with both the FCC part 30.203 (d)(1) & FCC part 30.203 (d)(2) limits for the 23.6 - 24.0 GHz band.

23 - 24.25 GHz n258 SB1, 2CC

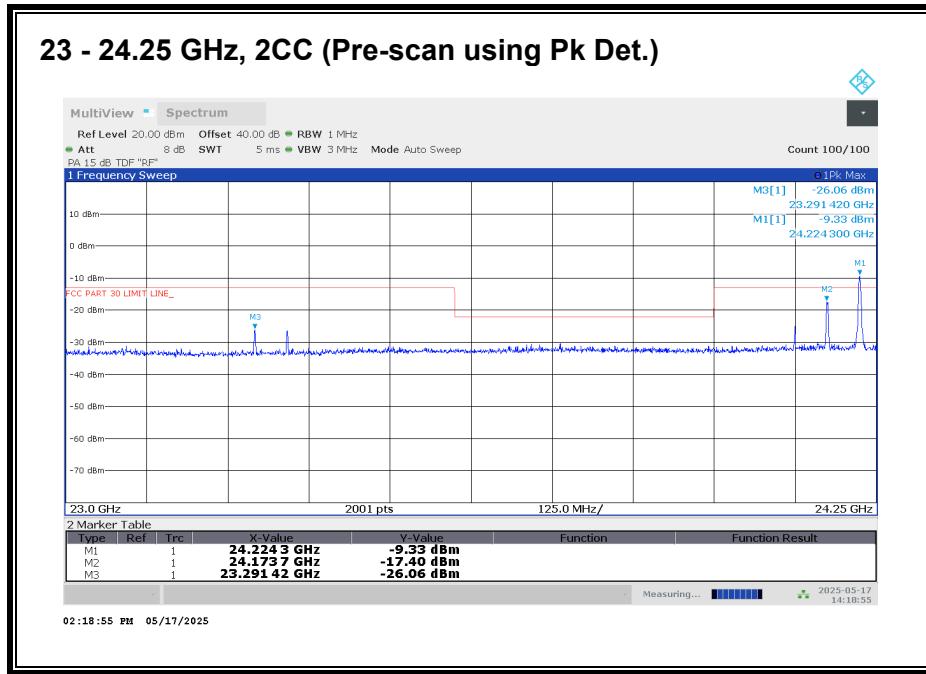

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.224	3.3	V	-16.62	-13	-3.62

23 - 24.25 GHz n258 SB1, 3CC

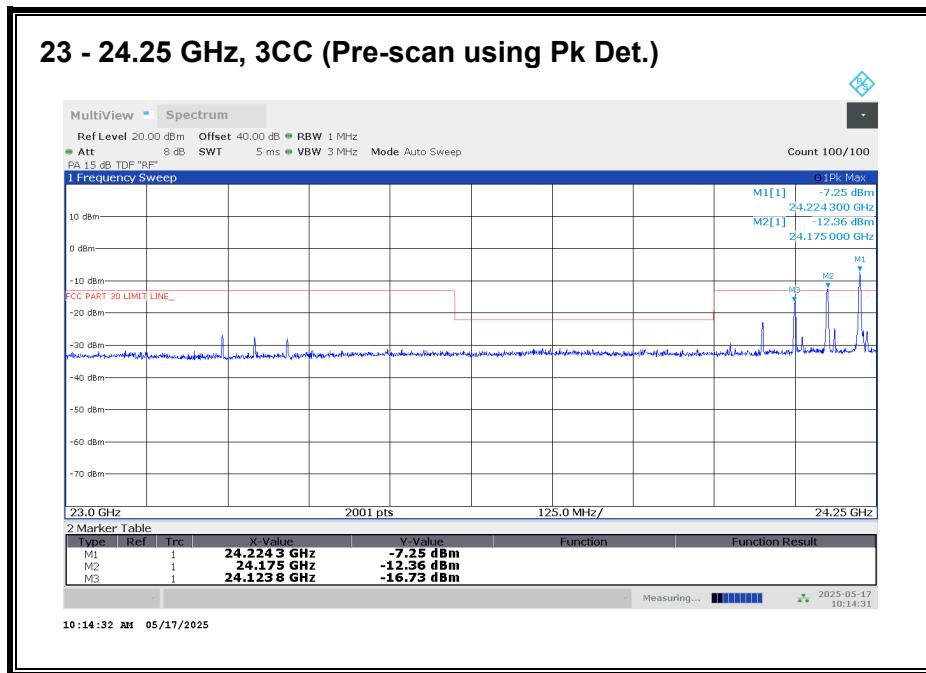

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.224	3.3	V	-16.15	-13	-3.15

23 - 24.25 GHz n258 SB1, 4CC

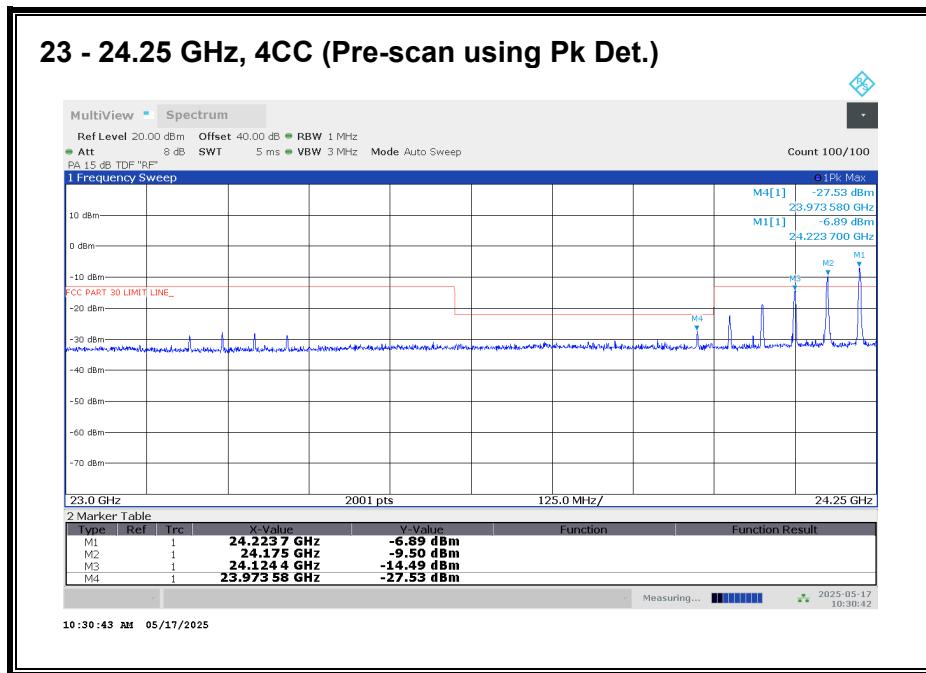

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.



All emissions were investigated, and the highest emission under various limit requirements were reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.224	3.3	V	-16.97	-13	-3.97
23.974*	3.3	V	-39.24	-22	-17.24
23.974*	3.3	V	-39.24	-28	-11.24

*Emission result complies with both the FCC part 30.203 (d)(1) & FCC part 30.203 (d)(2) limits for the 23.6 - 24.0 GHz band.

8.4.5. RSE n258 SB1 24.45 - 25.5 GHz

Note: 24.25 – 24.45 GHz covered by Fundamental and BE measurements.

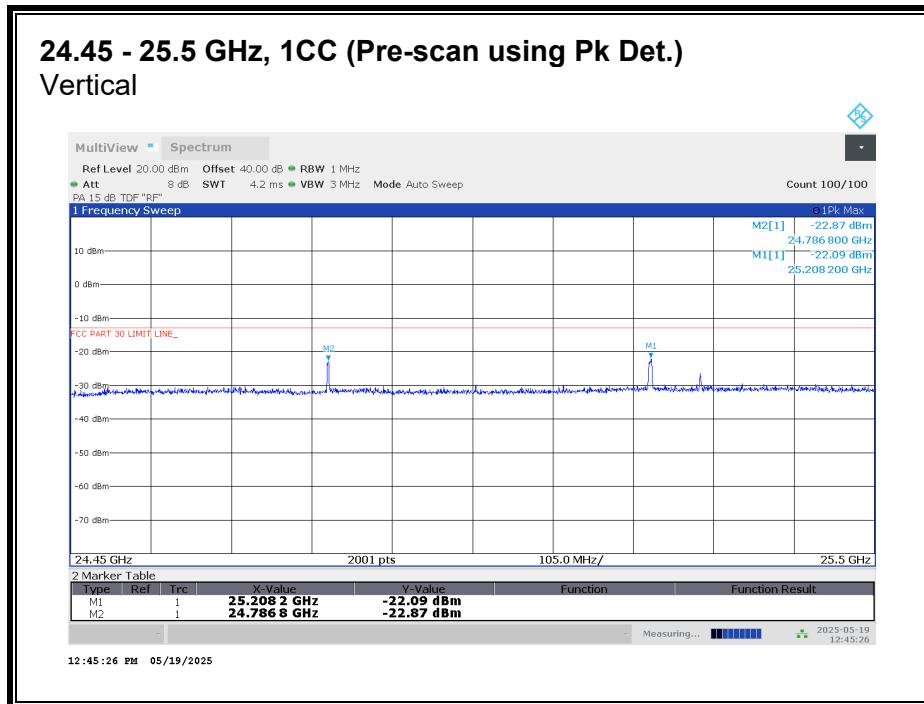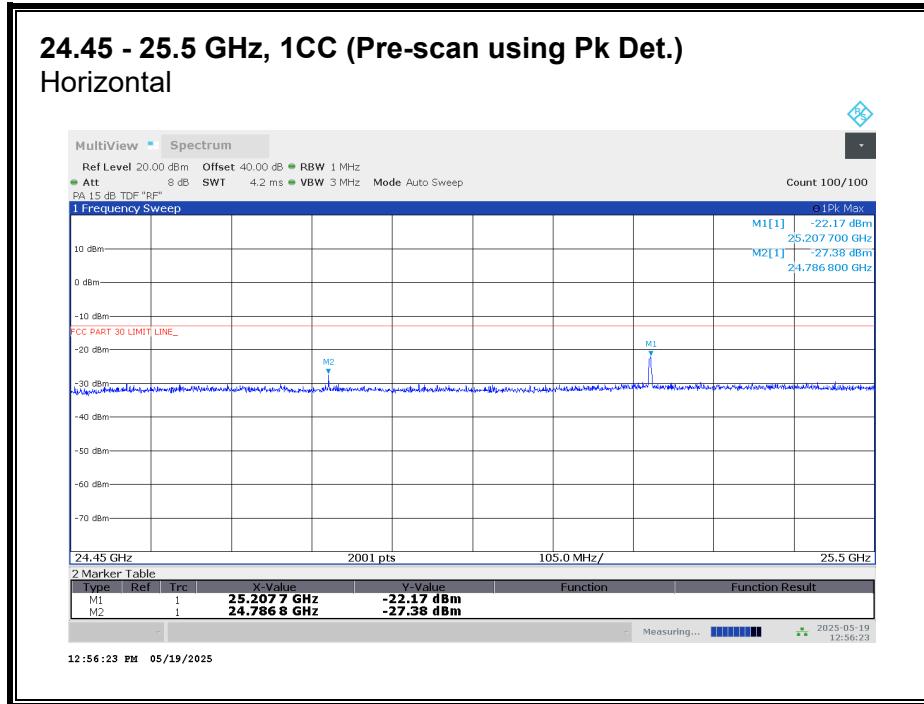


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

24.45 - 25.5 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.207	3.3	H	-35.51	-13	-22.51
25.207	3.3	V	-27.76	-13	-14.76
24.786	3.3	H	-41.06	-13	-28.06
24.786	3.3	V	-38.28	-13	-25.28

24.45 – 25.5 GHz n258 SB1, 2CC

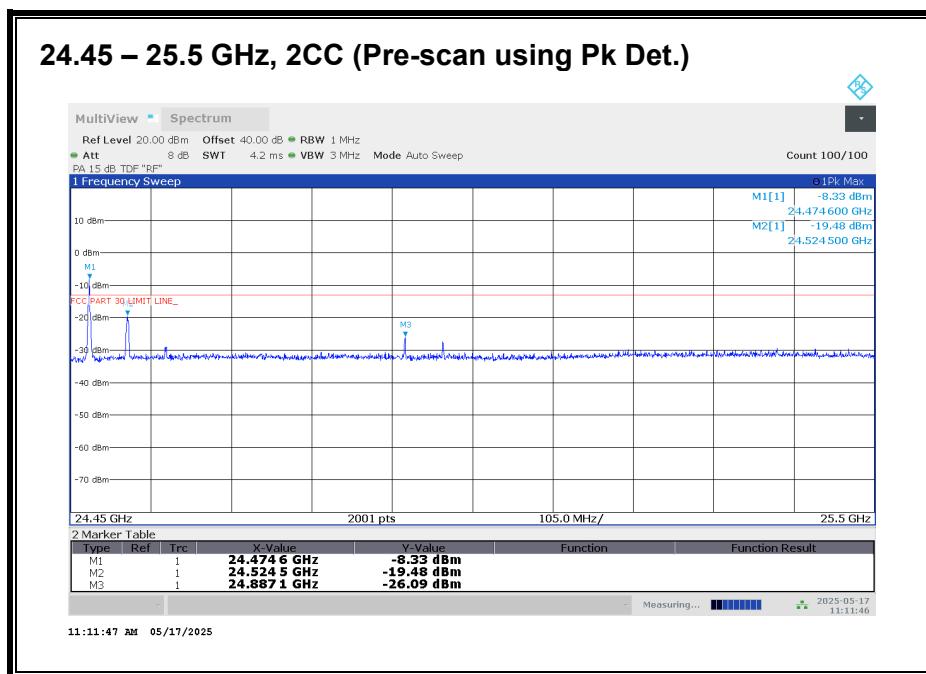

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.474	3.3	V	-22.27	-13	-9.27

24.45 – 25.5 GHz n258 SB1, 3CC

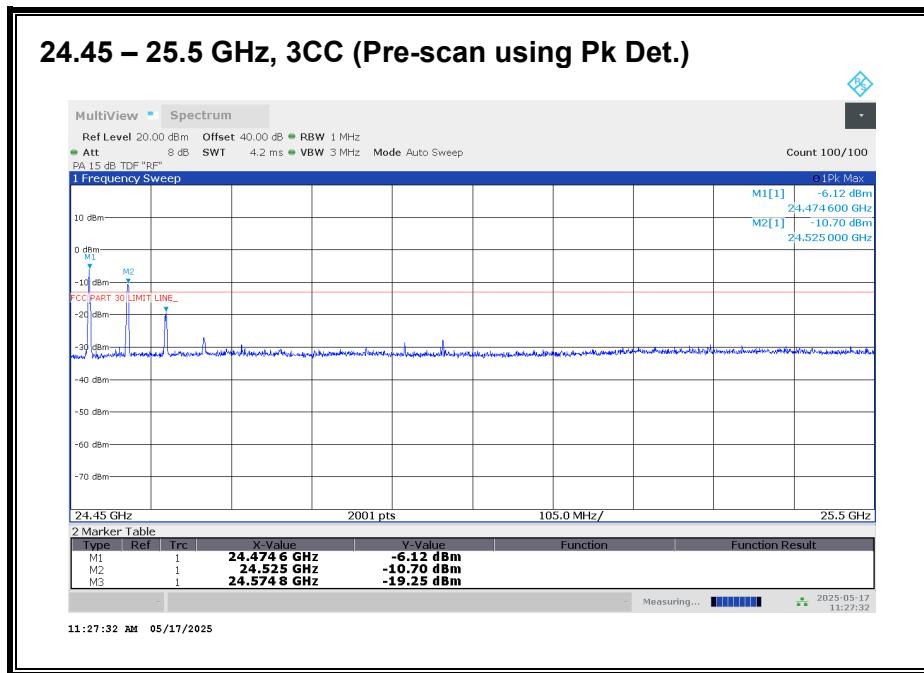

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.474	3.3	V	-22.21	-13	-9.21

24.45 – 25.5 GHz n258 SB1, 4CC

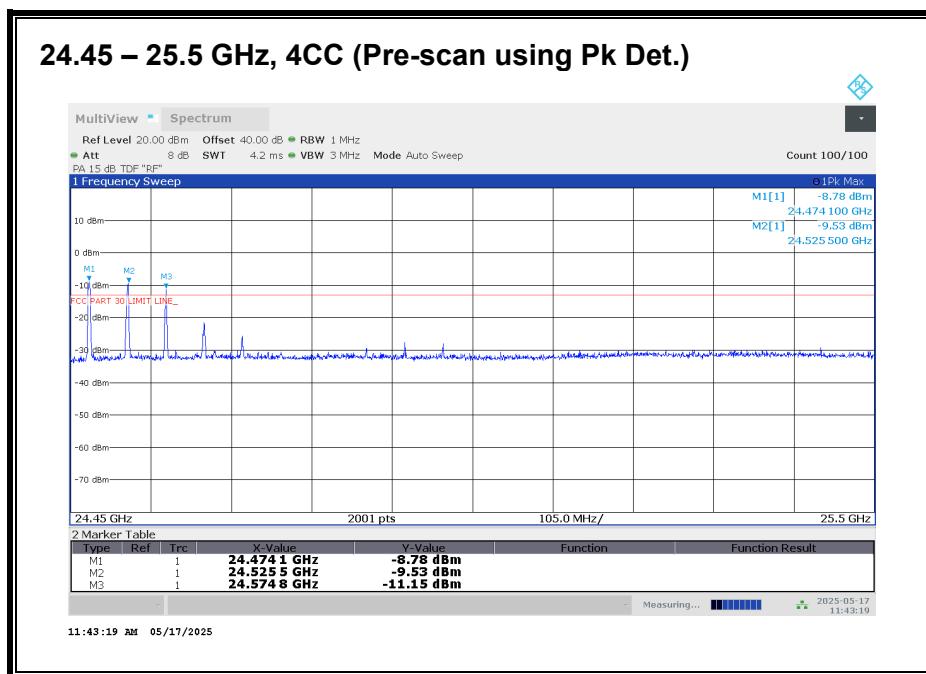

Worst case configuration:



SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.474	3.3	V	-23.28	-13	-10.28

8.4.6. RSE n258 SB1 25.5 - 26.5 GHz

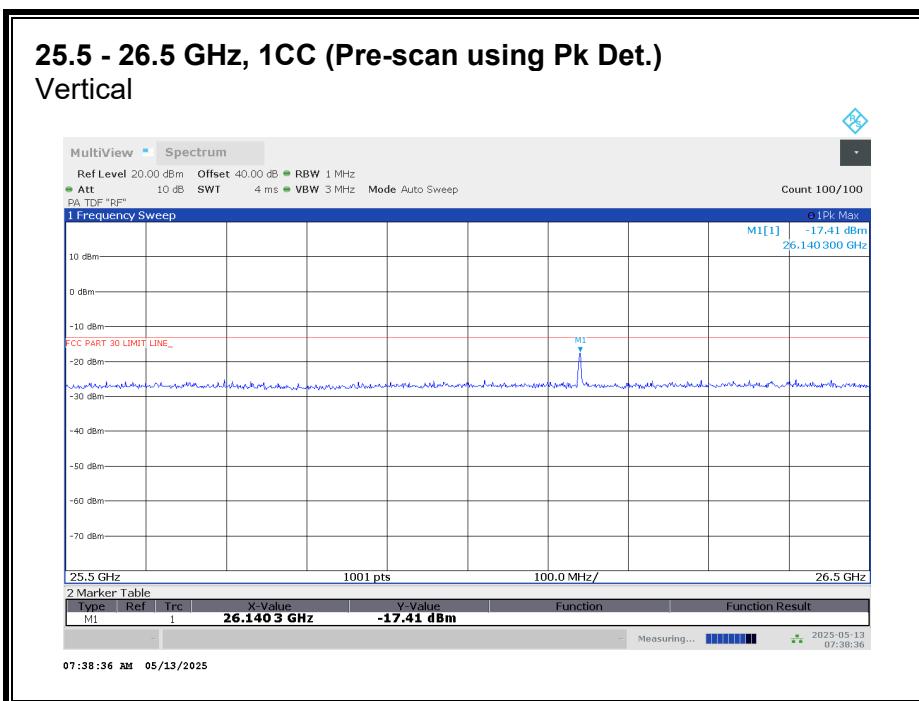
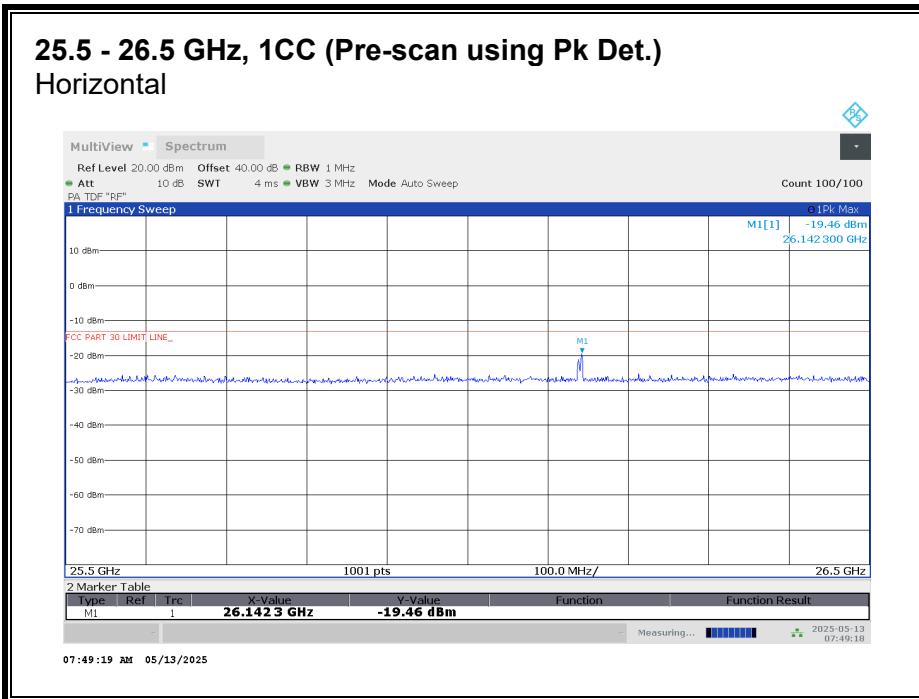


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

25.5 - 26.5 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
26.140	3.3	H	-32.05	-13	-19.05
26.140	3.3	V	-26.93	-13	-13.93


8.4.7. RSE n258 SB1 26.5 - 40 GHz

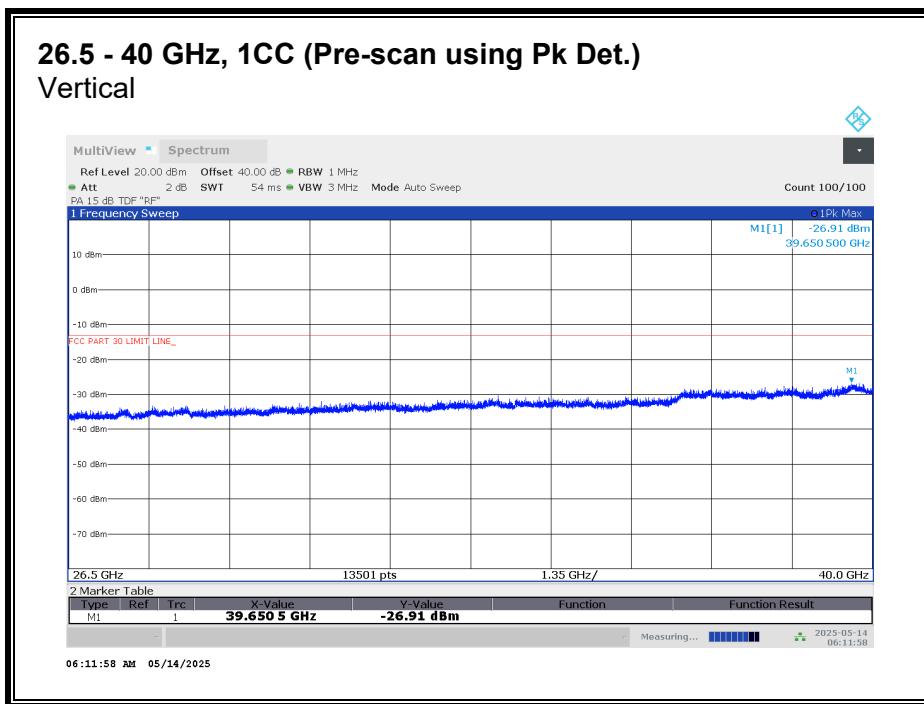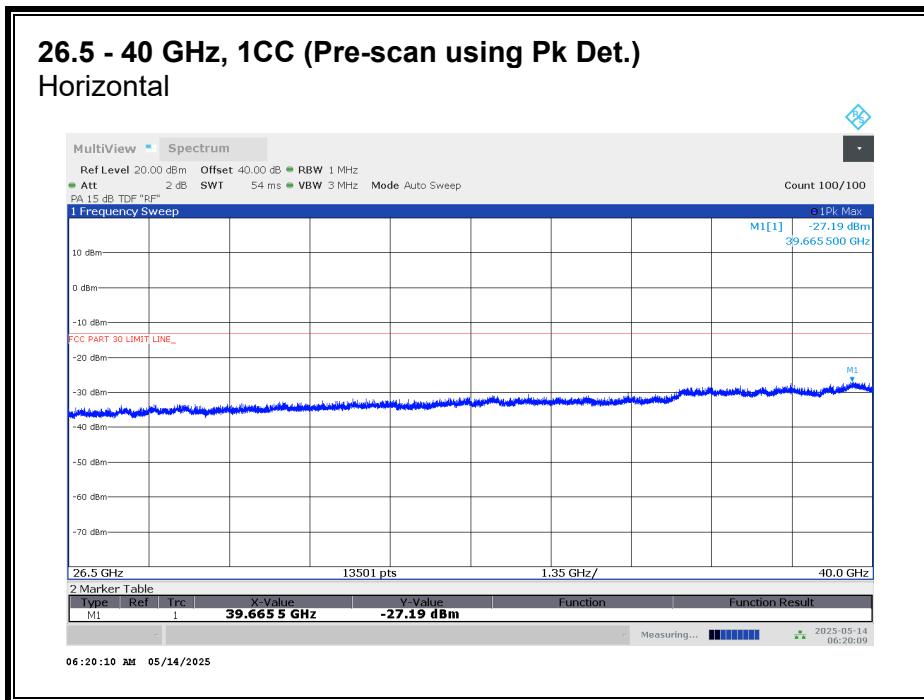


No emission detected using Peak Detection.

8.4.8. RSE n258 SB1 40 - 50 GHz

40 – 50 GHz, 1CC (Pre-scan using Pk Det.) Horizontal

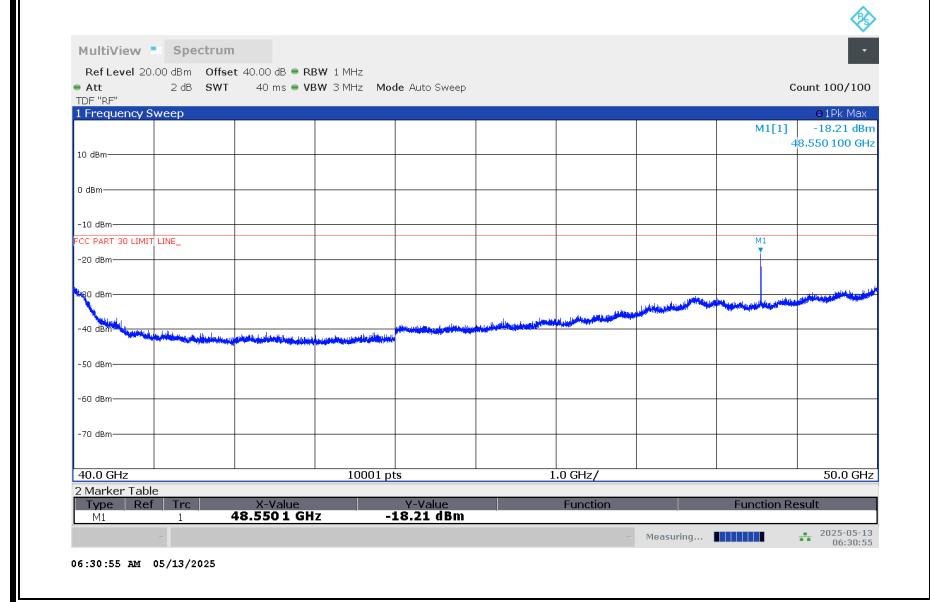

40 – 50 GHz, 1CC (Pre-scan using Pk Det.) Vertical


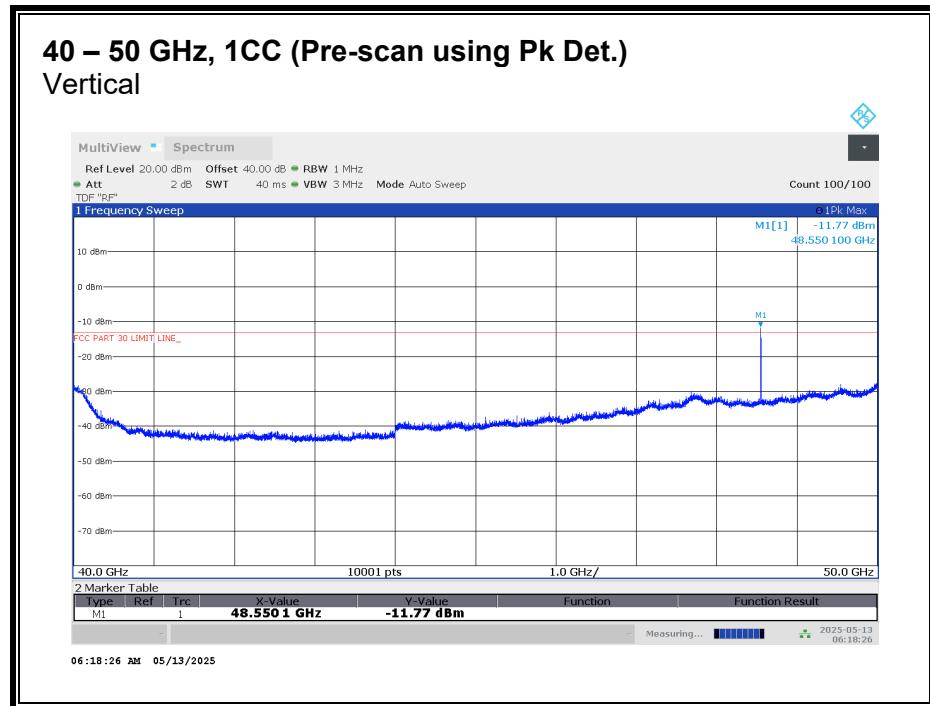


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

40 – 50 GHz n258 SB1, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
48.549	3	H	-26.61	-13	-13.61
48.549	3	V	-15.77	-13	-2.77

8.4.9. RSE n258 SB1 50 - 75 GHz

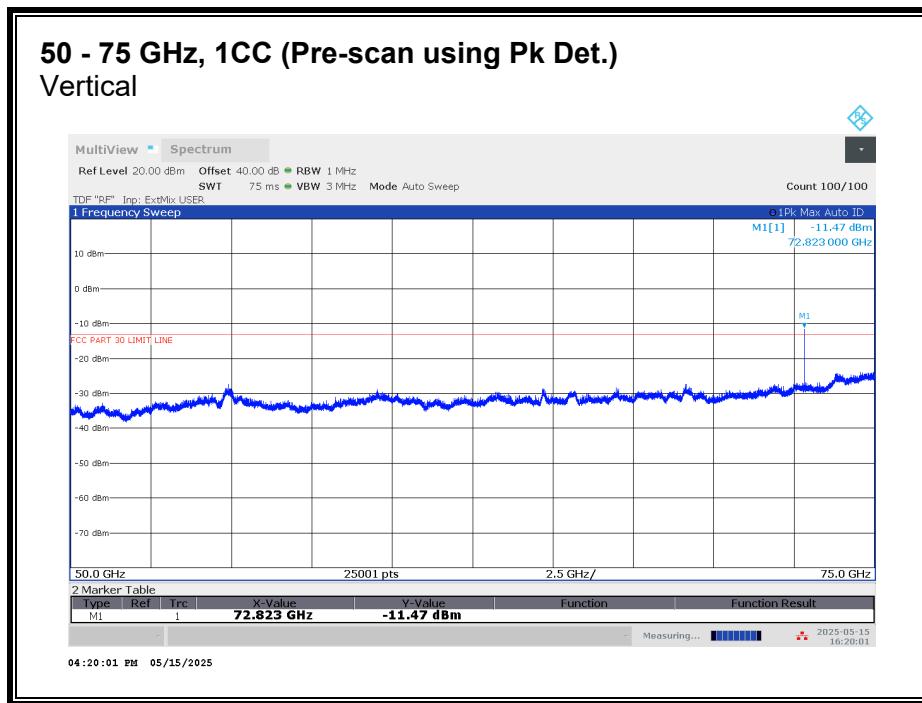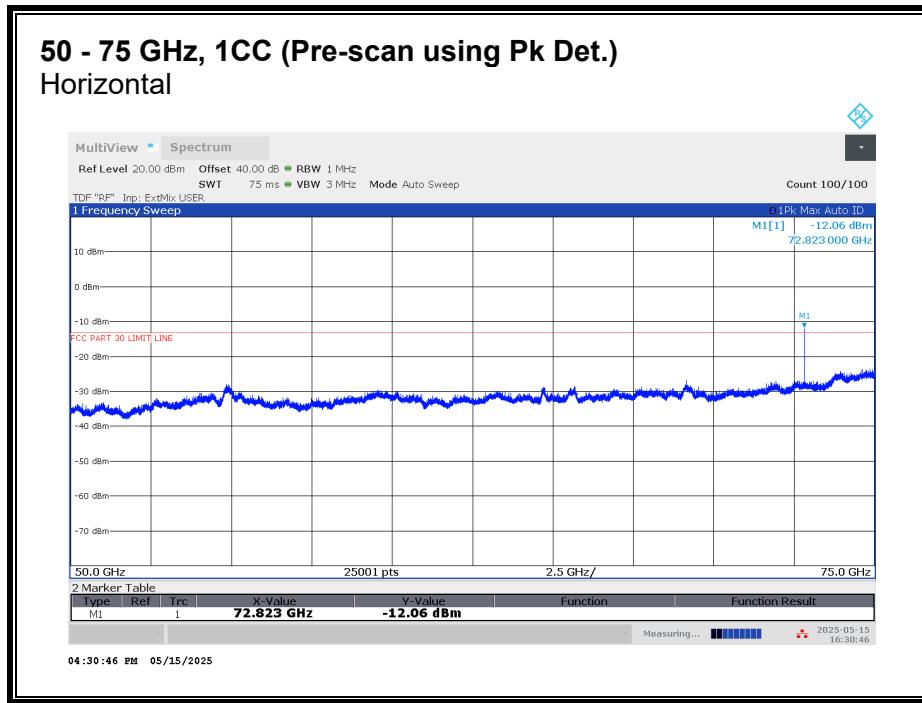


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

50 - 75 GHz n258 SB1, 1CC


Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
72.822	3	H	-25.27	-13	-12.27
72.822	3	V	-17.72	-13	-4.72

8.4.10. RSE n258 SB1 75 - 100 GHz

75 - 100 GHz, 1CC (Pre-scan using Pk Det.) Horizontal

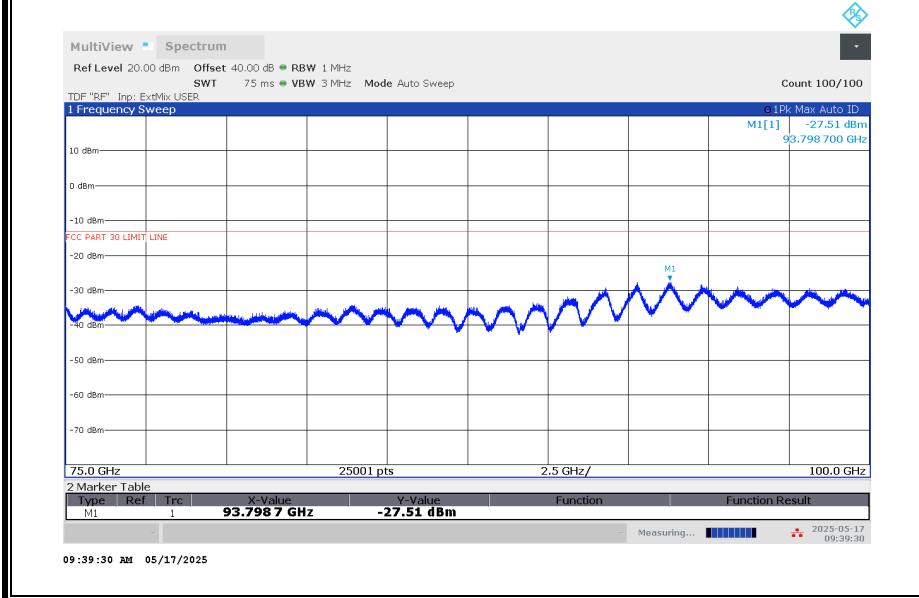


75 - 100 GHz, 1CC (Pre-scan using Pk Det.) Vertical

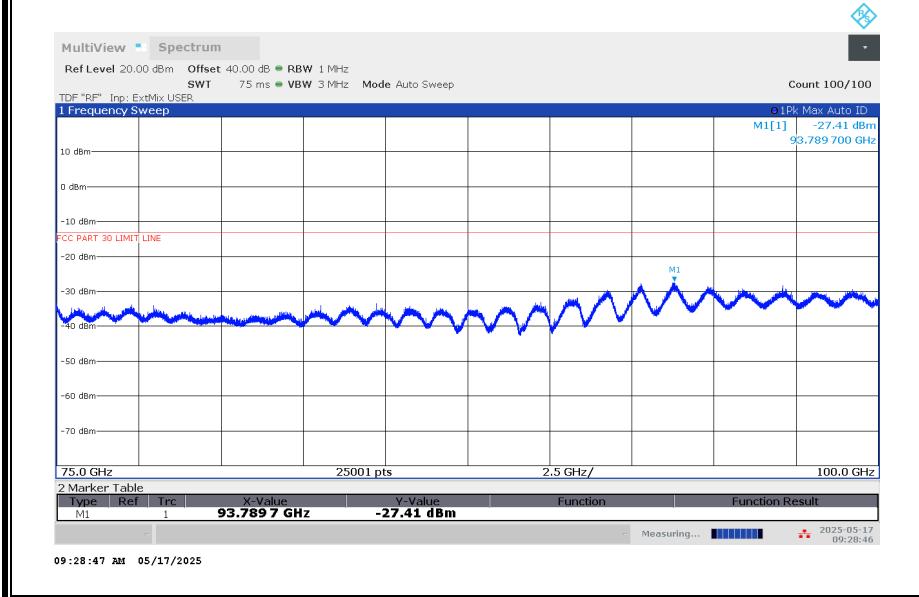

No emission detected using Peak Detection.

8.4.11. RSE n258 SB2 30 – 1000 MHz

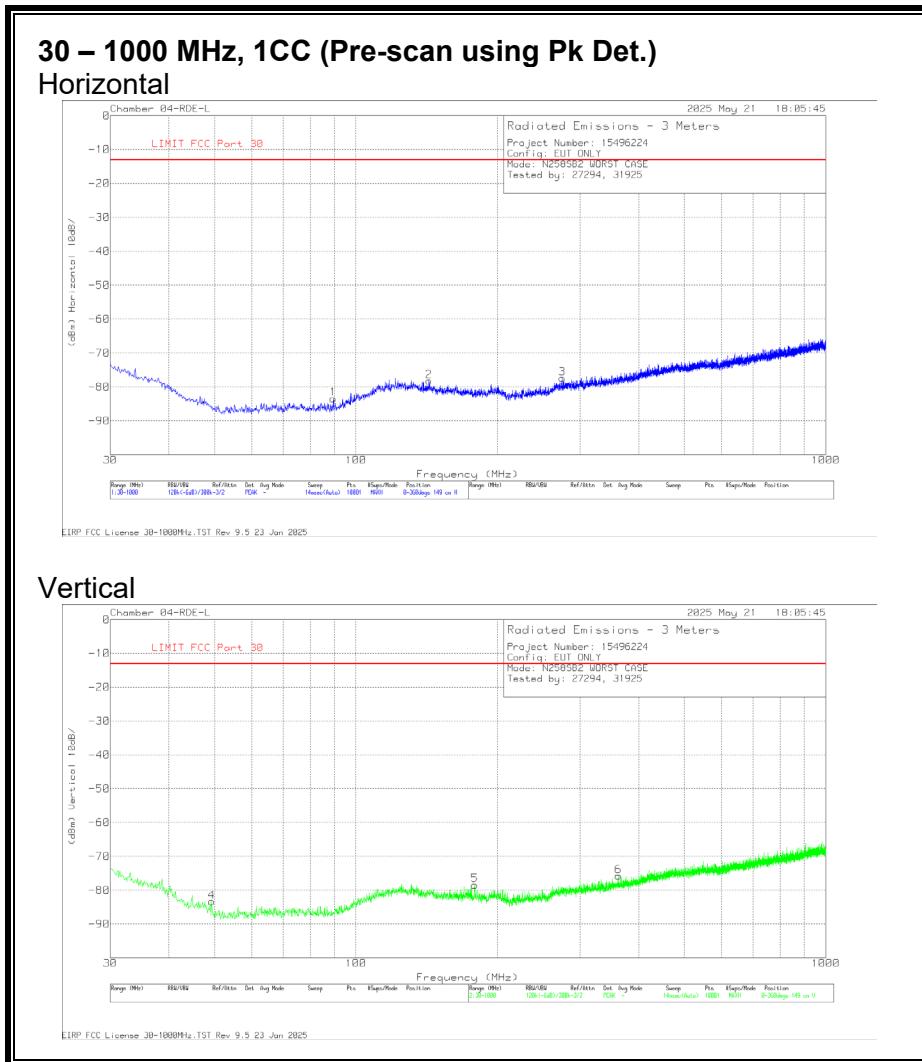


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ACF (dB/m)	Amp/CbIs (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	89.558	-77.89	Pk	13.8	-31.1	11.7	-83.49	-13	-70.49	0-360	149	H
2	143.102	-78.69	Pk	18.8	-30.1	11.7	-78.29	-13	-65.29	0-360	149	H
3	275.022	-78.22	Pk	19.3	-30.2	11.7	-77.42	-13	-64.42	0-360	149	H
4	49.303	-77.71	Pk	14.2	-31.6	11.7	-83.41	-13	-70.41	0-360	149	V
5	178.992	-77.25	Pk	17.2	-30.1	11.7	-78.45	-13	-65.45	0-360	149	V
6	361.837	-78.39	Pk	20.6	-29.7	11.7	-75.79	-13	-62.79	0-360	149	V

Pk - Peak detector

8.4.12. RSE n258 SB2 1 - 18 GHz


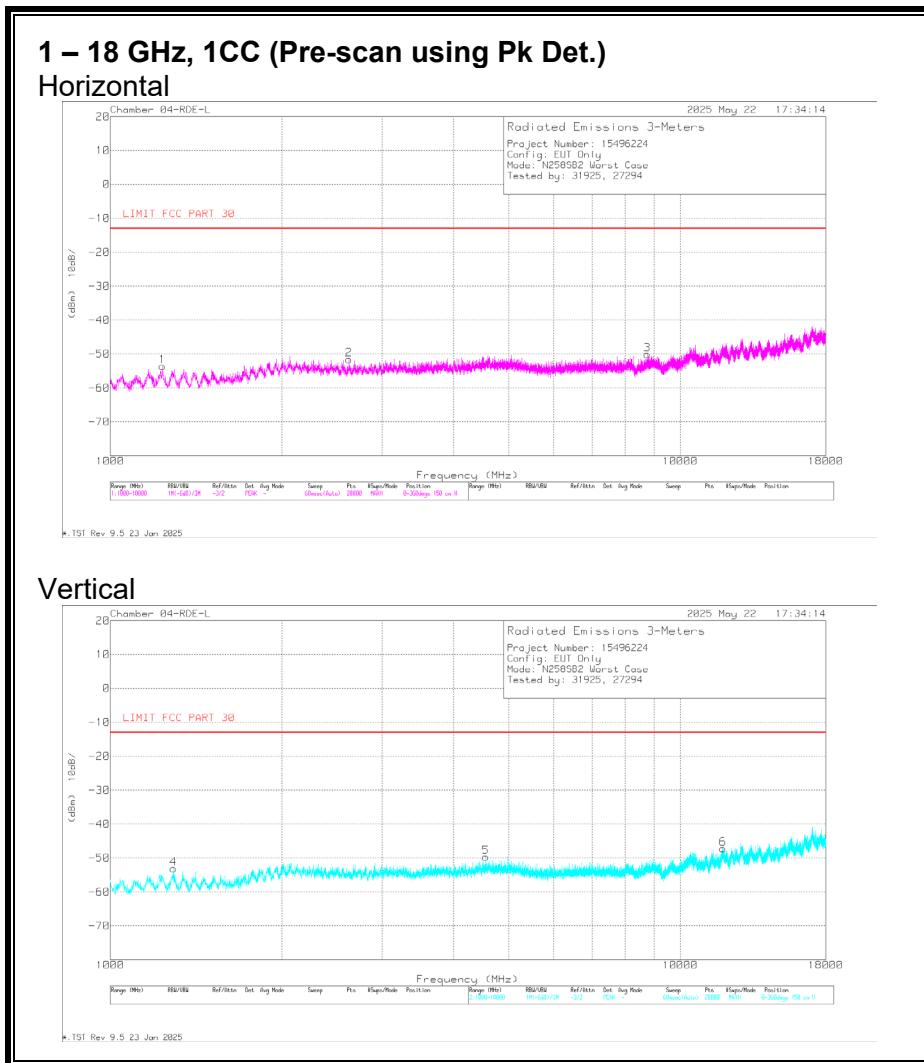


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1235.462	-47.23	Pk	28.7	-46.8	11.7	-53.63	-13	-40.63	0-360	150	H
2	2624.432	-49.90	Pk	32.1	-45.5	11.7	-51.60	-13	-38.60	0-360	150	H
3	8751.542	-56.44	Pk	35.8	-41.1	11.7	-50.04	-13	-37.04	0-360	150	H
4	1290.715	-46.71	Pk	28.6	-46.7	11.7	-53.11	-13	-40.11	0-360	150	V
5	4561.680	-51.62	Pk	34.2	-44.0	11.7	-49.72	-13	-36.72	0-360	150	V
6	11889.051	-61.60	Pk	38.5	-35.8	11.7	-47.20	-13	-34.20	0-360	150	V

Pk - Peak detector

8.4.13. RSE n258 SB2 18 – 23.6 GHz

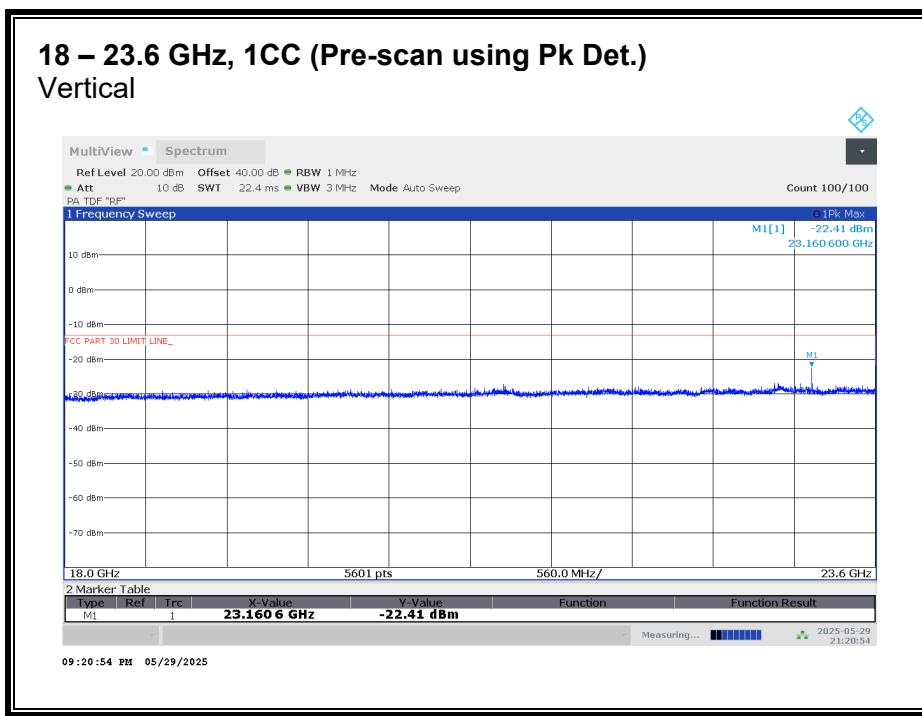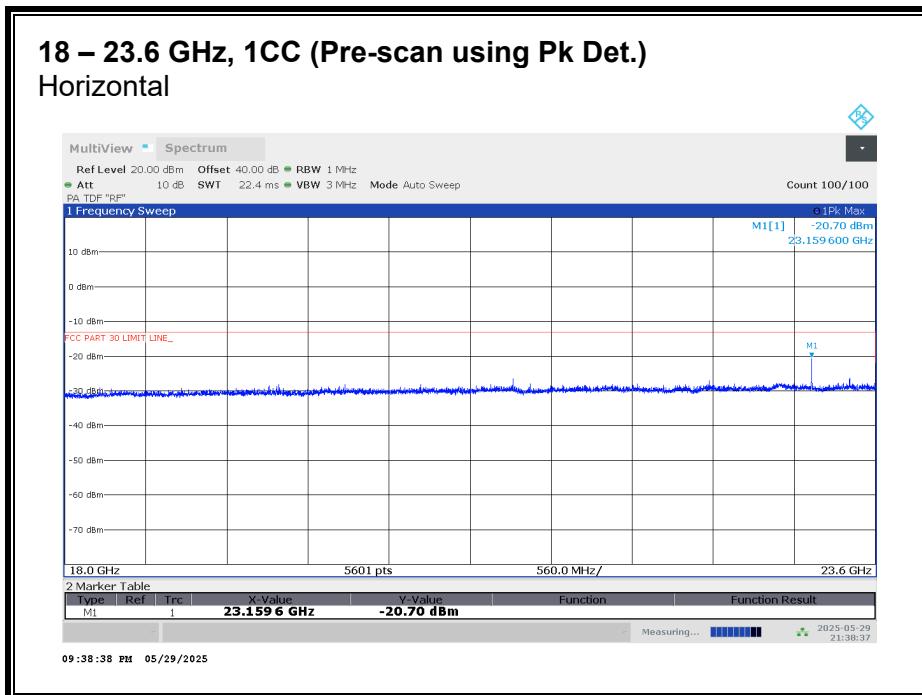


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured

18 – 23.6 GHz n258 SB2, 1CC


Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
23.160	3.3	H	-23.88	-13	-10.88
23.160	3.3	V	-29.25	-13	-16.25

8.4.14. RSE n258 SB2 23.6 – 24.75 GHz

23.6 – 24.75 GHz, 1CC (Pre-scan using Pk Det.) Horizontal

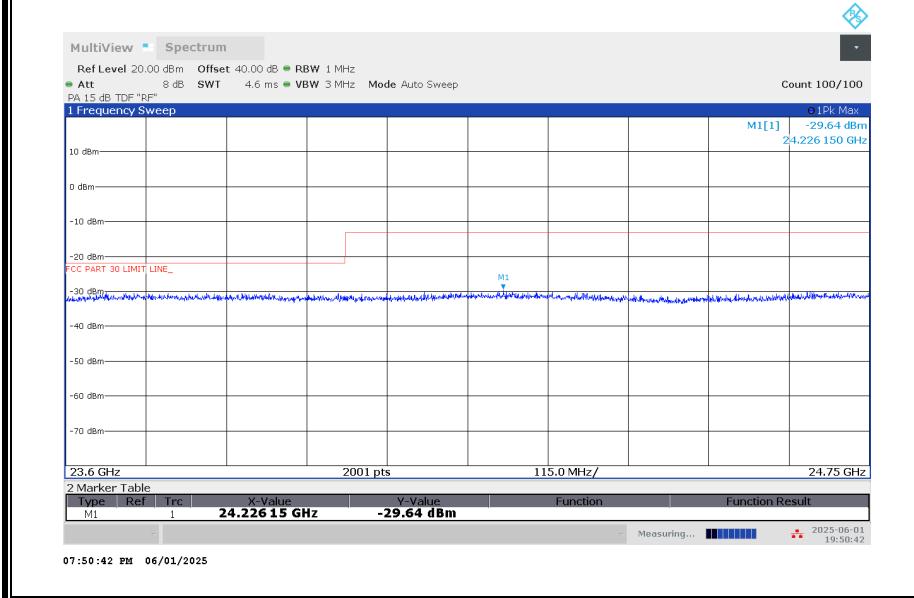


23.6 – 24.75 GHz, 1CC (Pre-scan using Pk Det.) Vertical

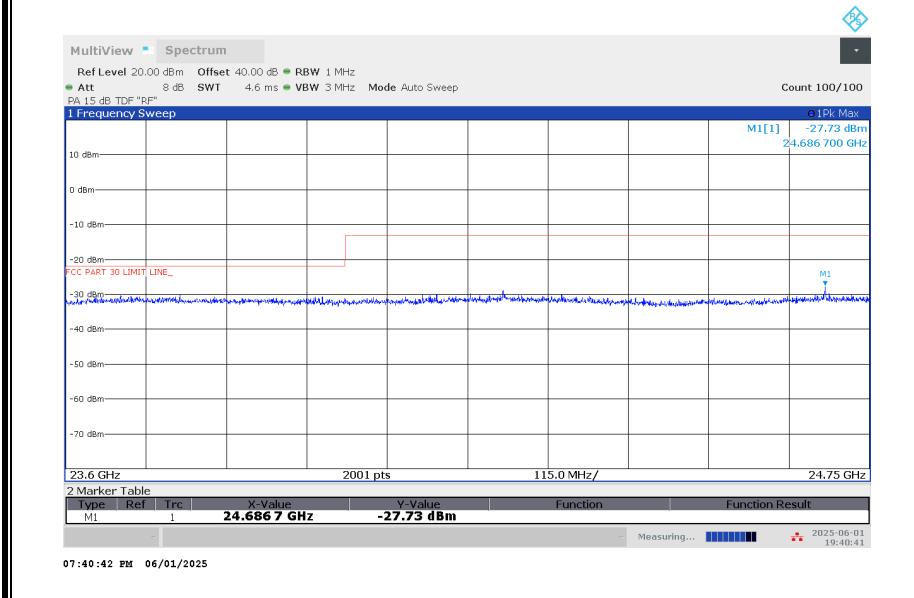

No emission detected using Peak Detection.

23.6 – 24.75 GHz n258 SB2, 2CC

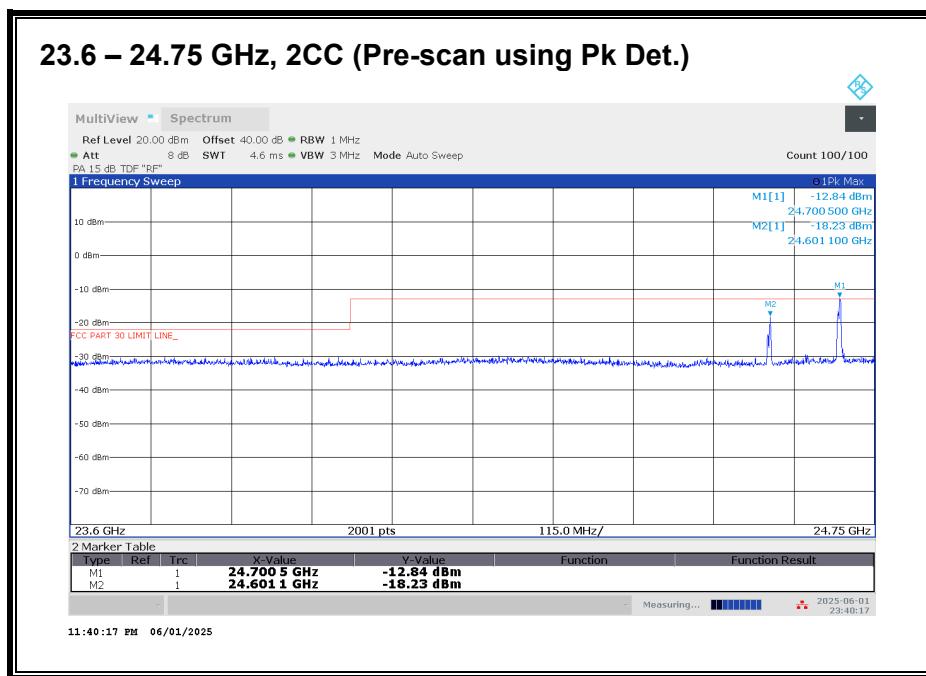

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.699	3.3	V	-15.90	-13	-2.90

23.6 – 24.75 GHz n258 SB2, 3CC

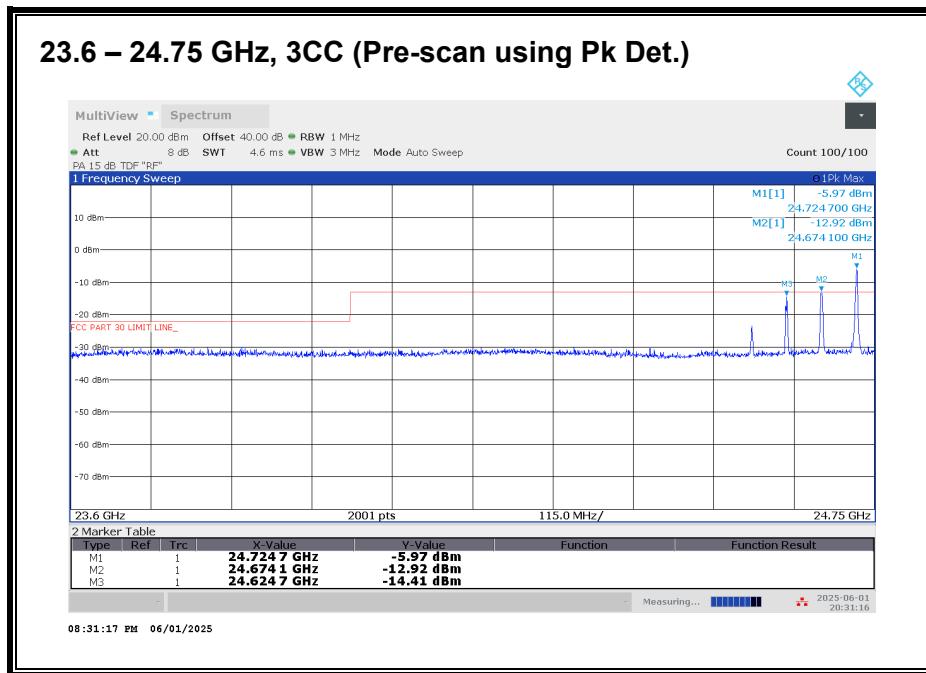

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.724	3.3	V	-15.22	-13	-2.22

23.6 – 24.75 GHz n258 SB2, 4CC

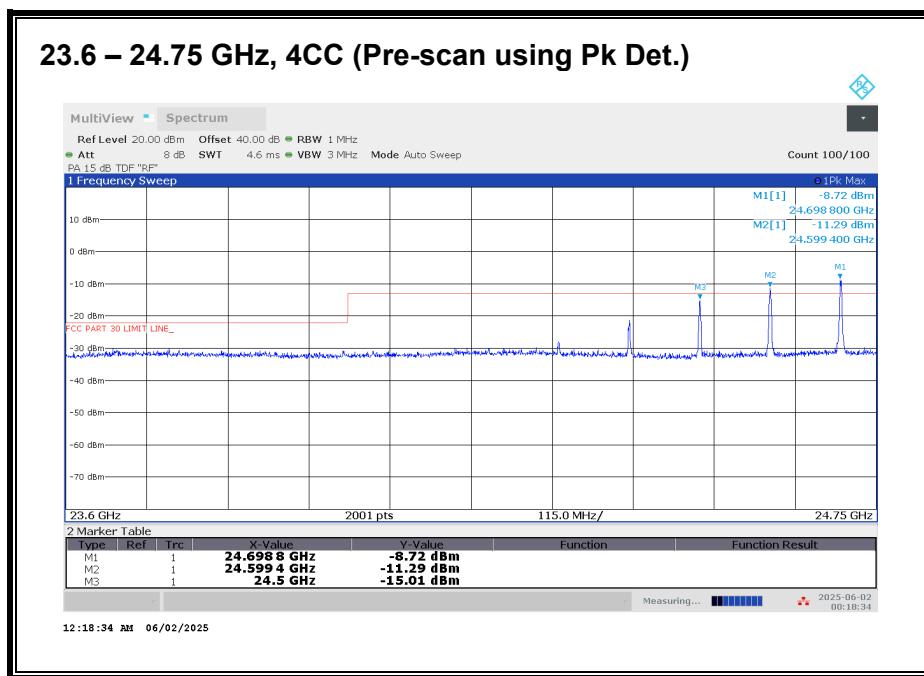

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)



Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
24.699	3.3	V	-18.28	-13	-5.28

8.4.15. RSE n258 SB2 25.25 - 26.5 GHz

Note: 24.75 – 25.25 GHz covered by Fundamental and BE measurements.

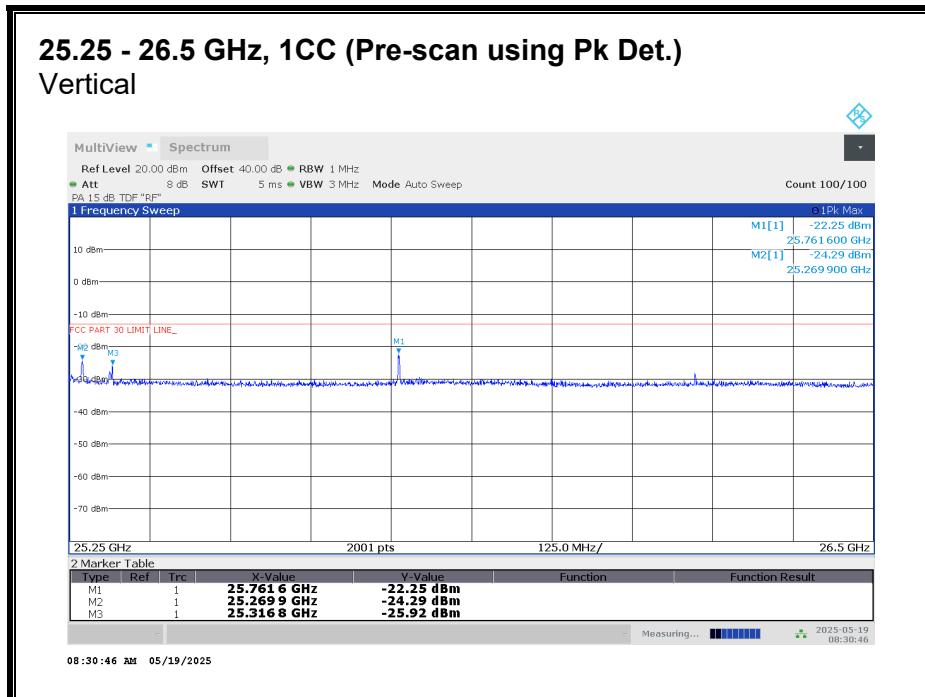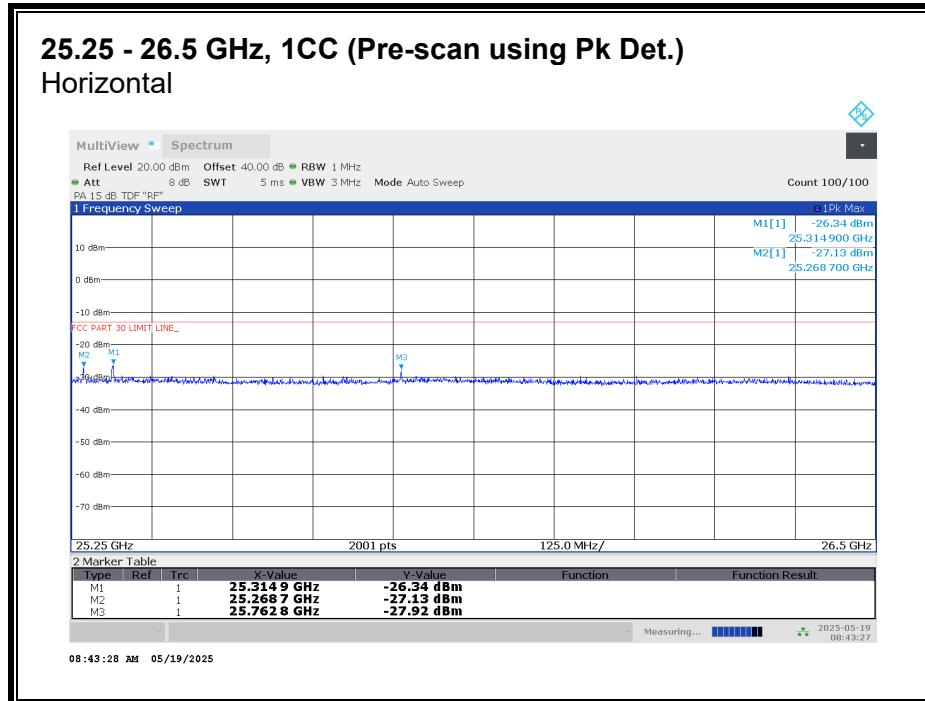


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

25.25 - 26.5 GHz n258 SB2, 1CC

Freq. (GHz)	Meas. Distance (m)	Rx Ant. Polarity	Corrected Avg EIRP (dBm)	TRP Limit (dBm)	Margin (dB)
25.762	3.3	H	-41.22	-13	-28.22
25.762	3.3	V	-37.92	-13	-24.92
25.269	3.3	H	-38.55	-13	-25.55
25.269	3.3	V	-32.78	-13	-19.78
25.314	3.3	H	-39.85	-13	-26.85
25.314	3.3	V	-37.11	-13	-24.11

25.25 - 26.5 GHz n258 SB2, 2CC

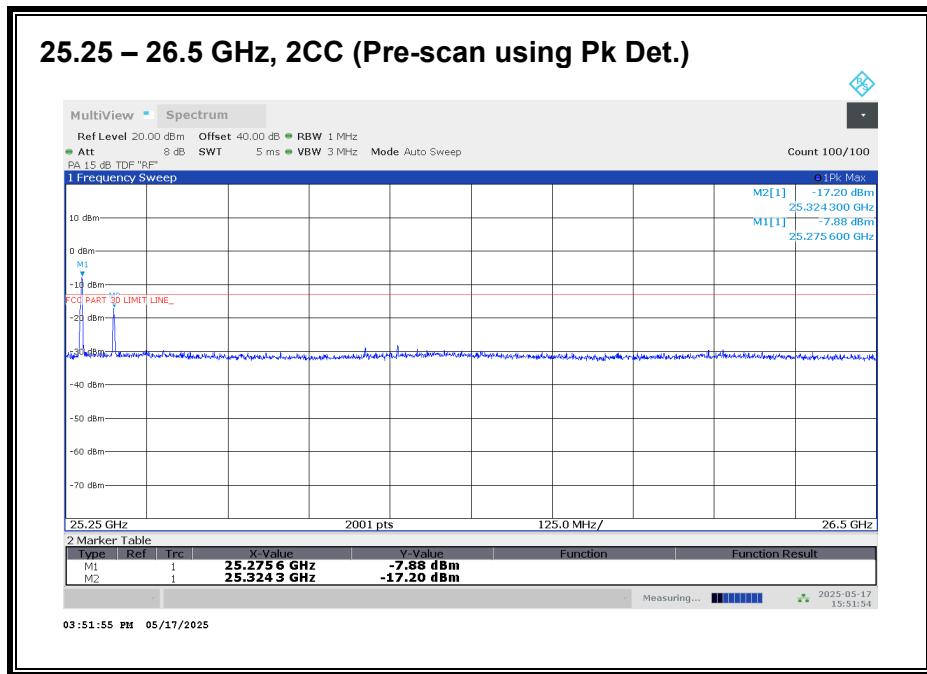

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.274	3.3	V	-21.53	-13	-8.53

25.25 - 26.5 GHz n258 SB2, 3CC

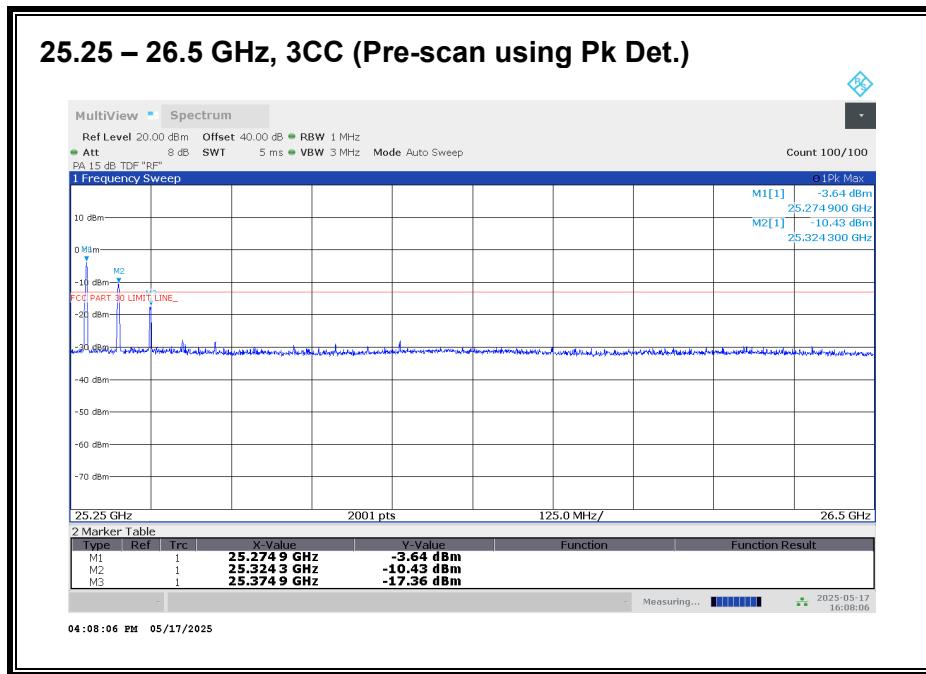

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.274	3.3	V	-21.10	-13	-8.10

25.25 - 26.5 GHz n258 SB2, 4CC

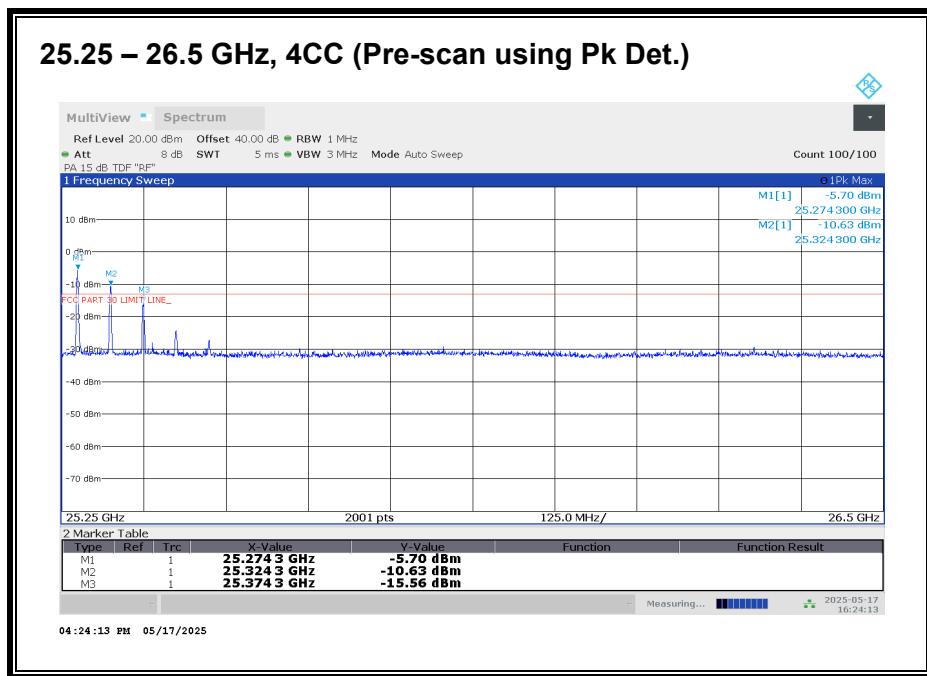

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.


Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
25.274	3.3	V	-21.07	-13	-8.07

8.4.16. RSE n258 SB2 26.5 - 40 GHz

26.5 - 40 GHz, 1CC (Pre-scan using Pk Det.) Horizontal

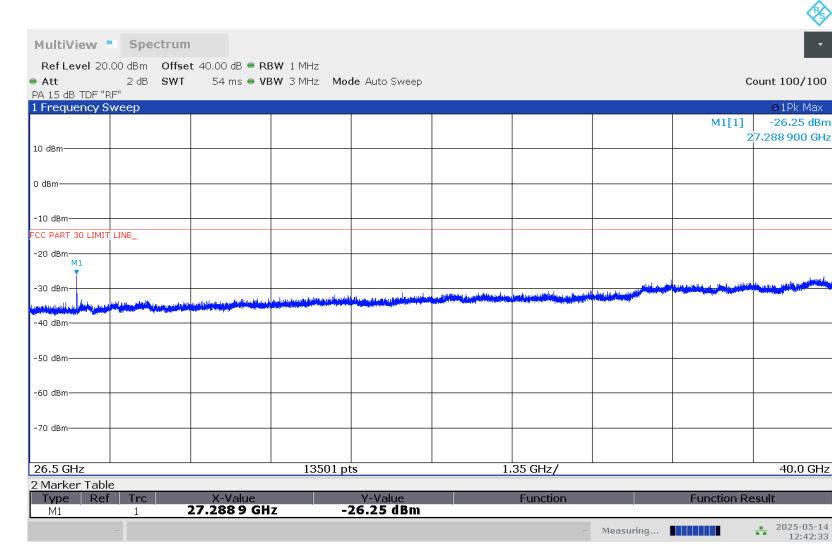

26.5 - 40 GHz, 1CC (Pre-scan using Pk Det.) Vertical

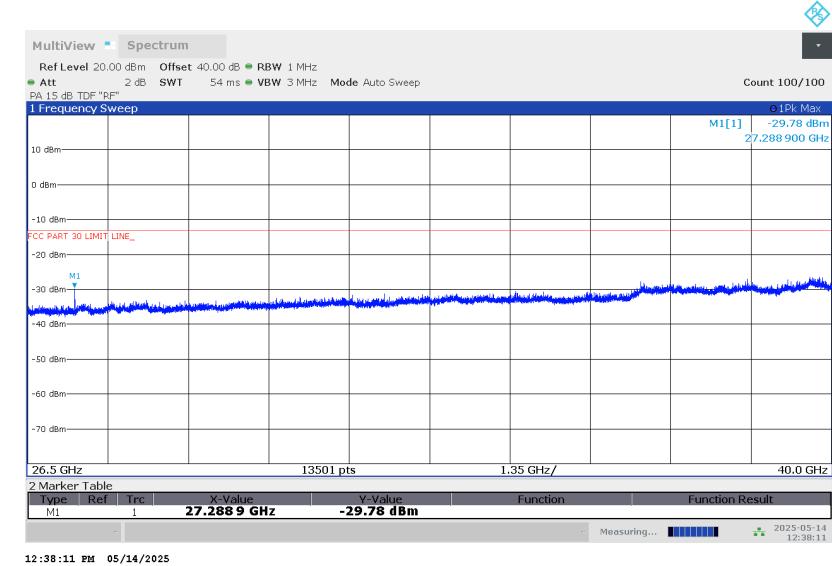


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 - 40 GHz n258 SB2, 1CC


Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
27.289	3	H	-43.49	-13	-30.49
27.289	3	V	-33.12	-13	-20.12

8.4.17. RSE n258 SB2 40 - 50 GHz

40 – 50 GHz, 1CC (Pre-scan using Pk Det.) Horizontal


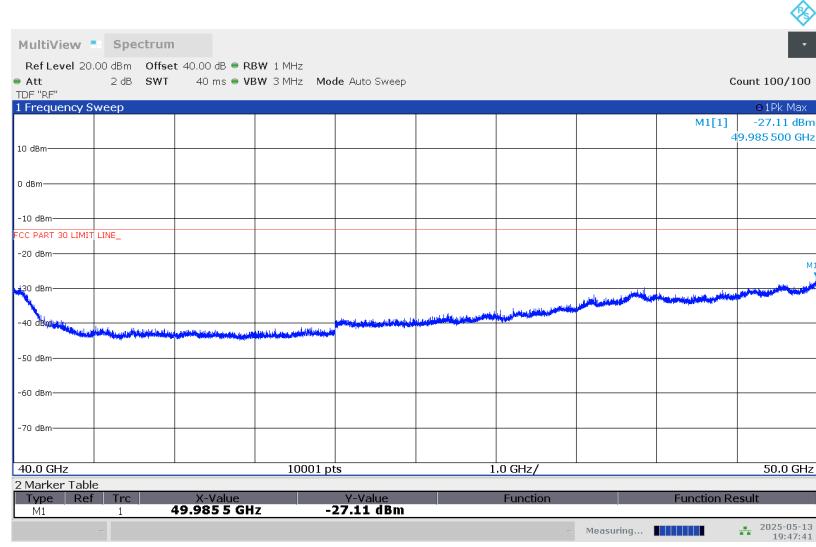


40 – 50 GHz, 1CC (Pre-scan using Pk Det.) Vertical

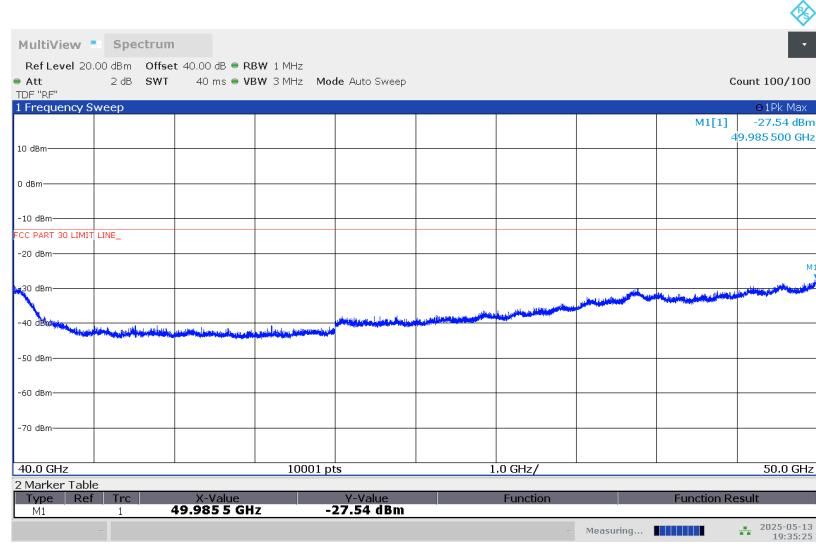

No emission detected using Peak Detection.

8.4.18. RSE n258 SB2 50 - 75 GHz

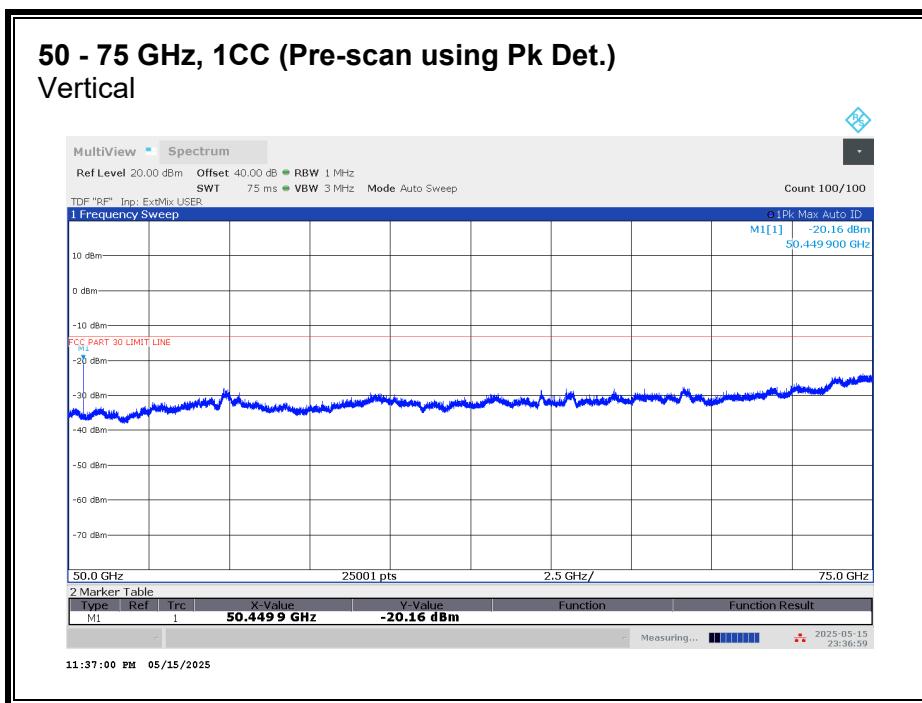
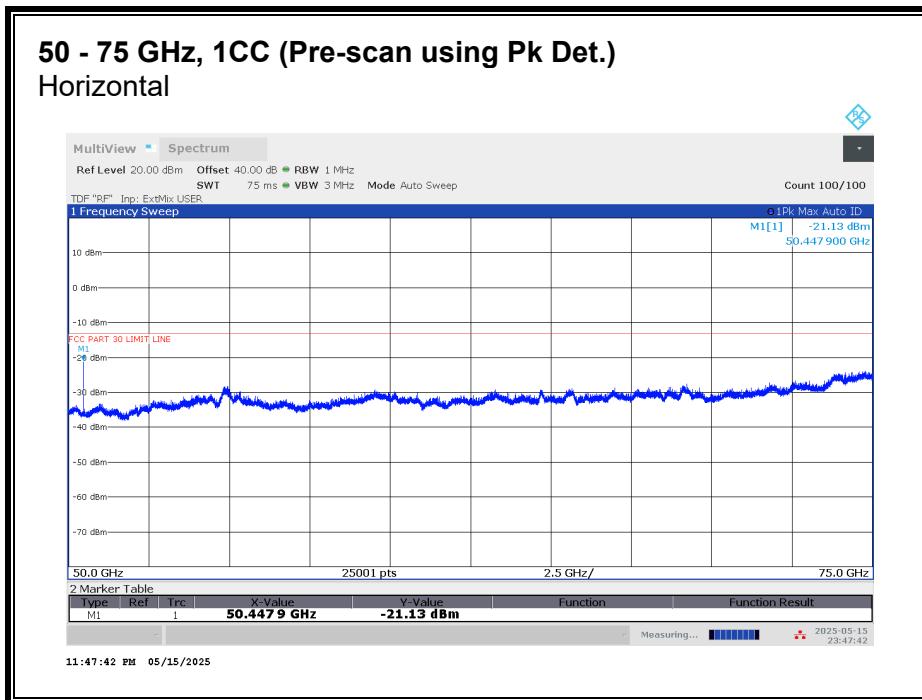


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

50 - 75 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
50.449	3	H	-36.18	-13	-23.18
50.449	3	V	-25.51	-13	-12.51

8.4.19. RSE n258 SB2 75 - 100 GHz

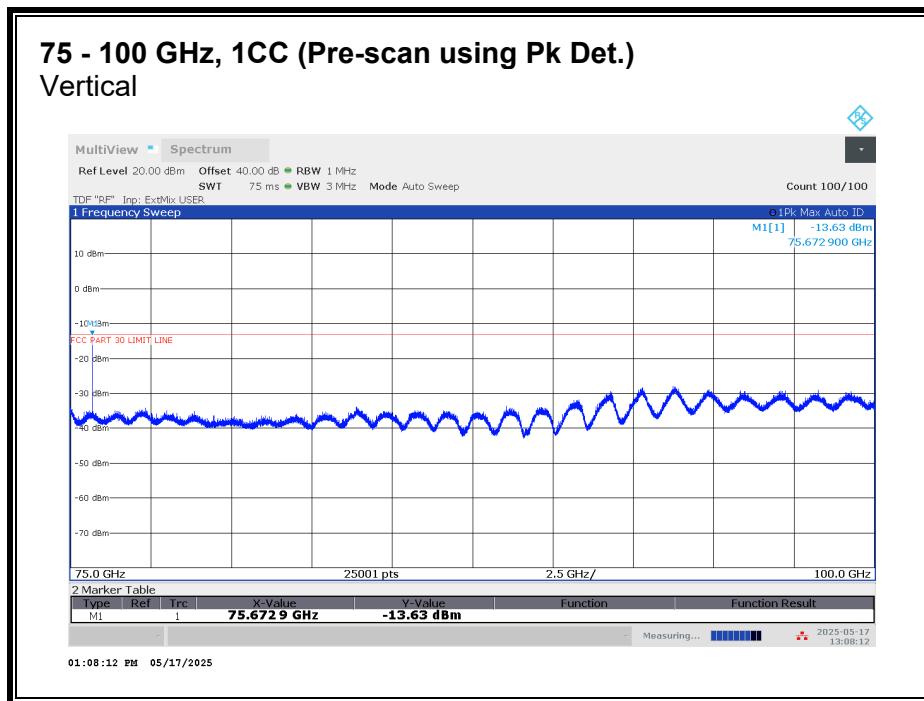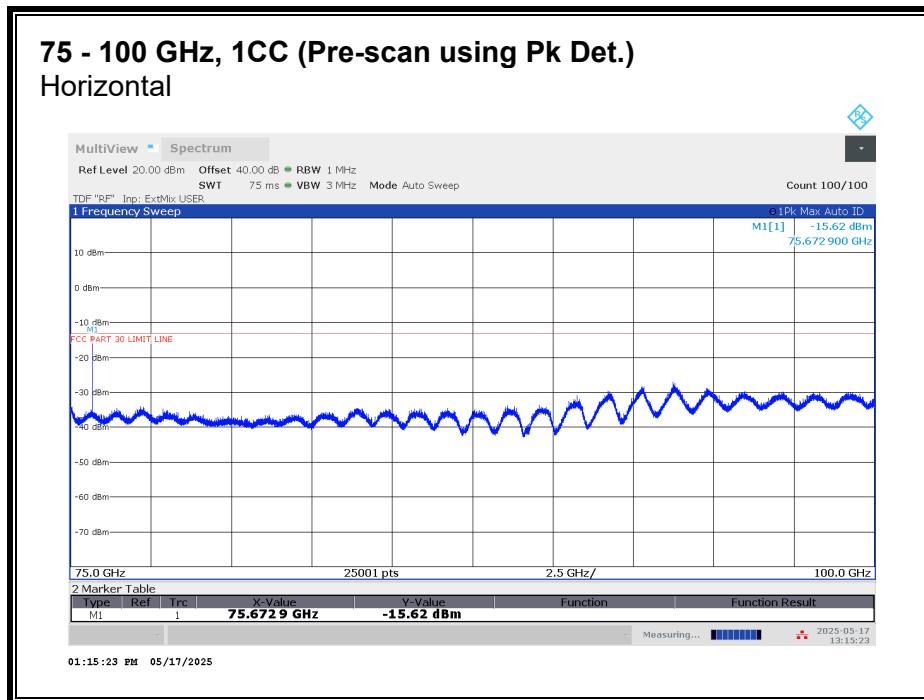


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

75 - 100 GHz n258 SB2, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
75.672	3	H	-31.22	-13	-18.22
75.672	3	V	-19.22	-13	-6.22

8.4.20. RSE n261 30 – 1000 MHz

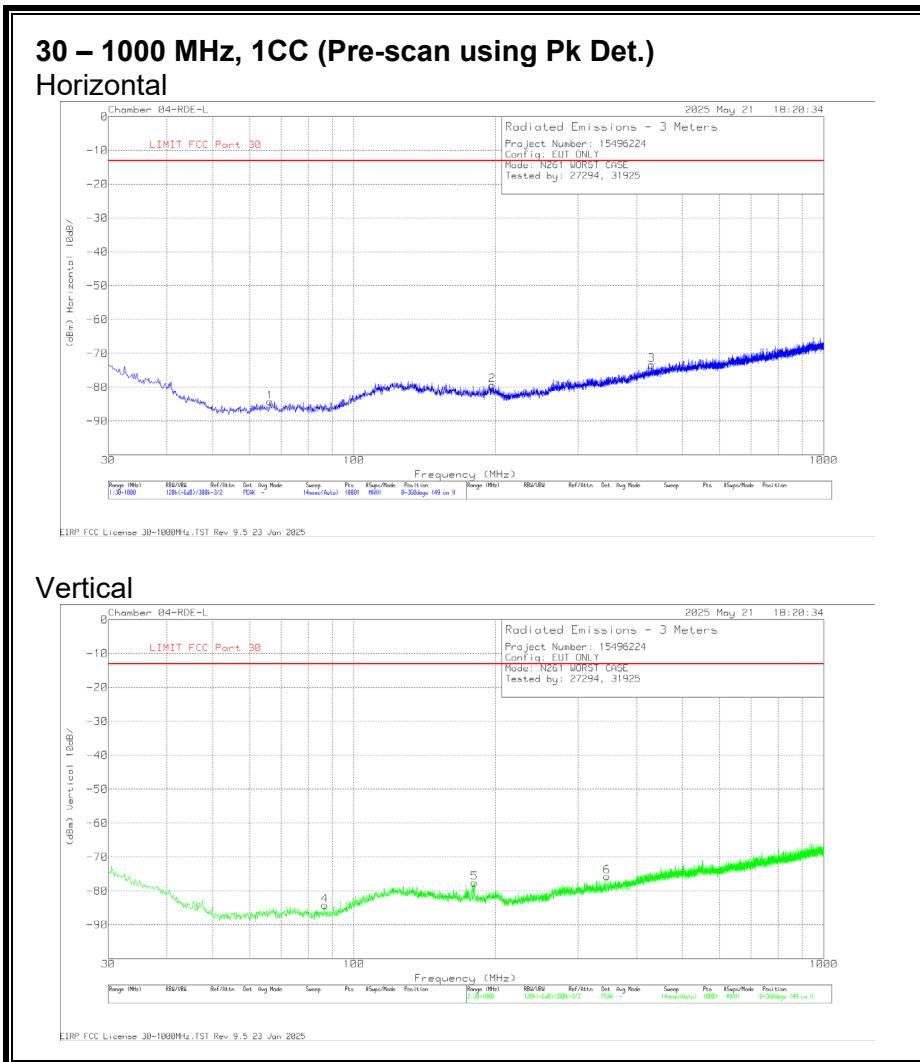


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ACF (dB/m)	Amp/CbIs (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	66.278	-78.39	Pk	13.8	-31.4	11.7	-84.29	-13	-71.29	0-360	149	H
2	197.131	-79.09	Pk	18.0	-30.0	11.7	-79.39	-13	-66.39	0-360	149	H
3	430.319	-78.22	Pk	22.4	-29.2	11.7	-73.32	-13	-60.32	0-360	149	H
4	86.648	-78.65	Pk	13.5	-30.8	11.7	-84.25	-13	-71.25	0-360	149	V
5	180.35	-76.45	Pk	17.1	-29.9	11.7	-77.55	-13	-64.55	0-360	149	V
6	345.929	-78.50	Pk	20.1	-29.0	11.7	-75.70	-13	-62.70	0-360	149	V

Pk - Peak detector

8.4.21. RSE n261 1 - 18 GHz


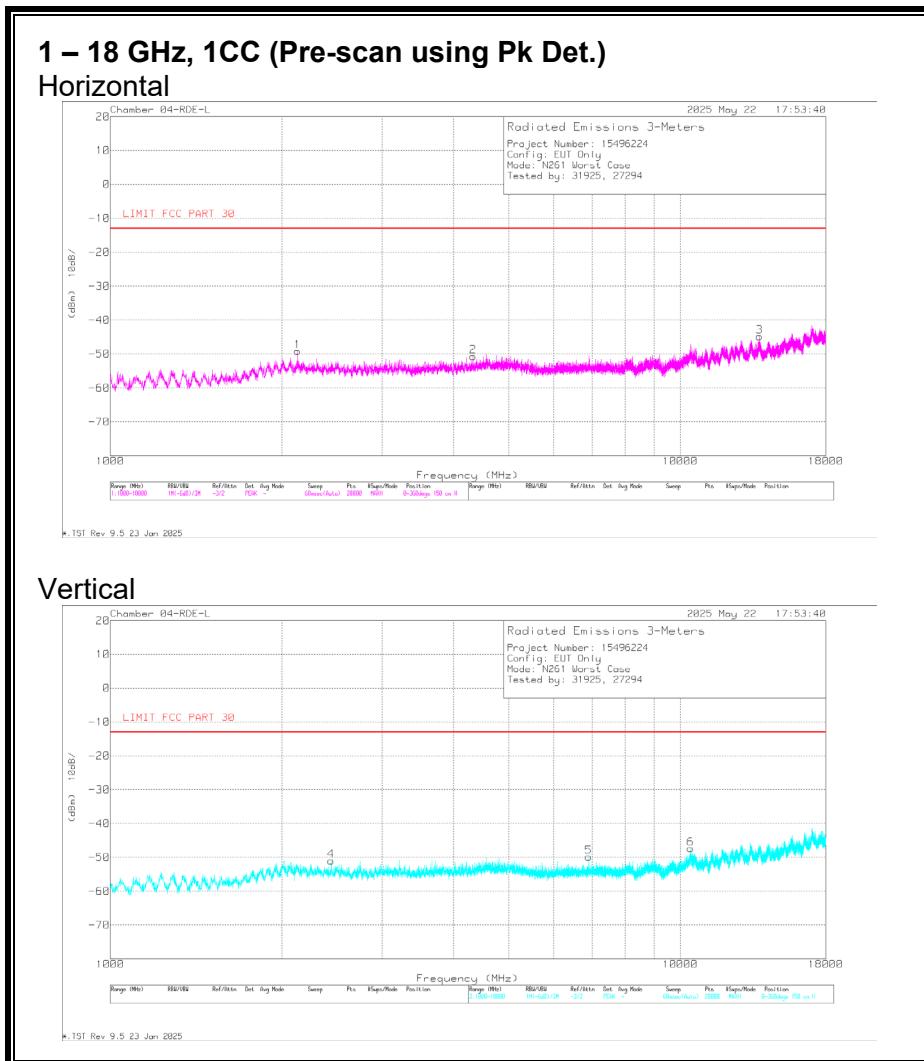


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2129.707	-46.36	Pk	31.6	-46.1	11.7	-49.16	-13	-36.16	0-360	150	H
2	4327.918	-52.13	Pk	33.6	-43.9	11.7	-50.73	-13	-37.73	0-360	150	H
3	13759.995	-60.87	Pk	38.8	-34.5	11.7	-44.87	-13	-31.87	0-360	150	H
4	2440.823	-49.08	Pk	32.3	-45.9	11.7	-50.98	-13	-37.98	0-360	150	V
5	6906.949	-56.40	Pk	35.7	-40.8	11.7	-49.80	-13	-36.80	0-360	150	V
6	10429.527	-58.19	Pk	37.8	-38.7	11.7	-47.39	-13	-34.39	0-360	150	V

Pk - Peak detector

8.4.22. RSE n261 18 - 26.5 GHz

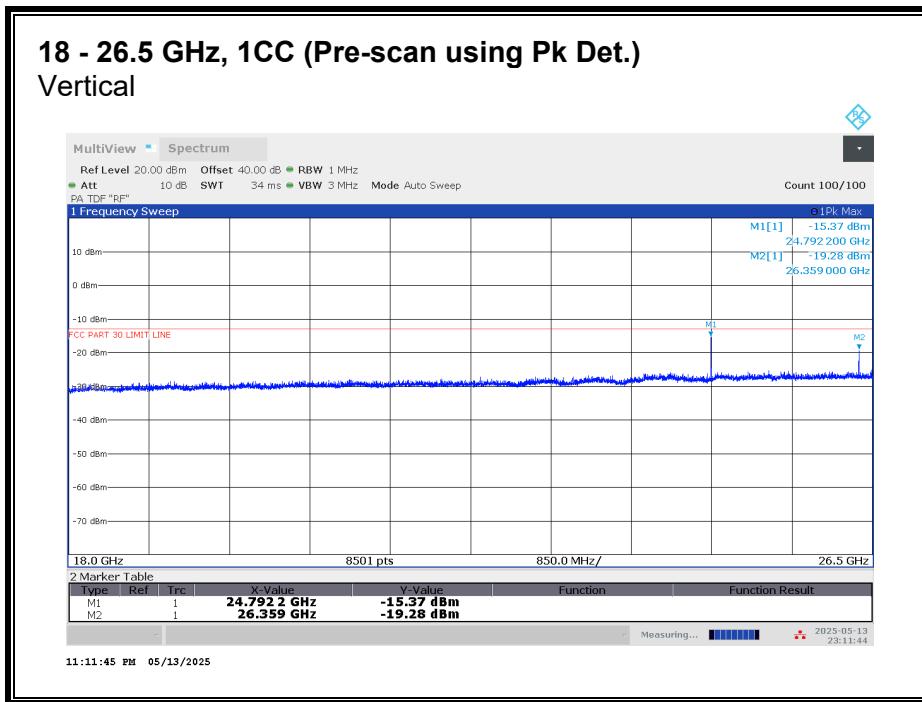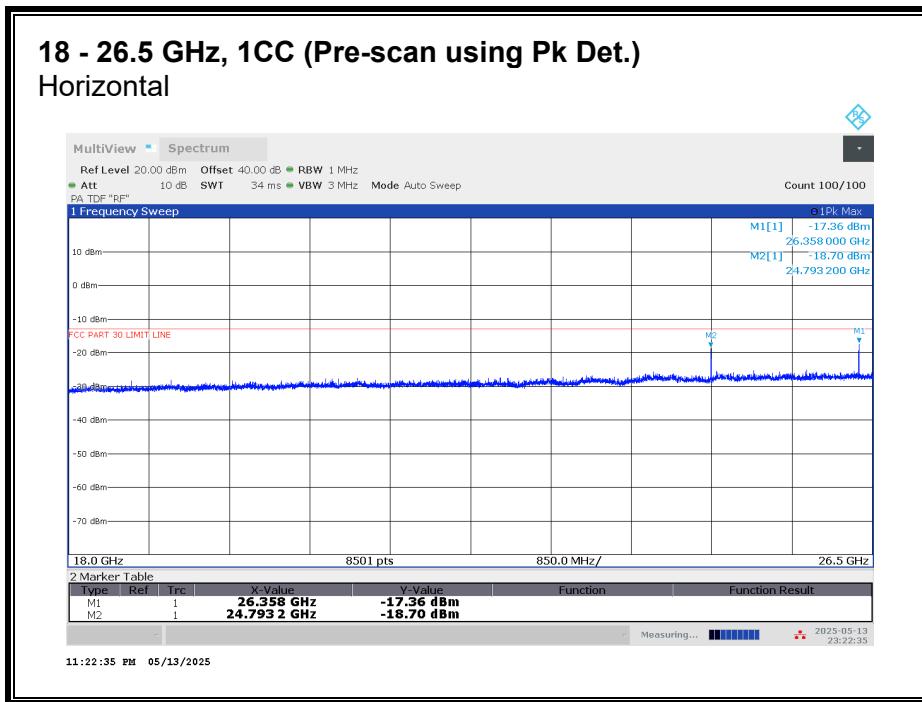



Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

18 - 26.5 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
26.358	3.3	H	-19.05	-13	-6.05
26.358	3.3	V	-31.34	-13	-18.34
24.791	3.3	H	-27.59	-13	-14.59
24.791	3.3	V	-22.00	-13	-9.00


8.4.23. RSE n261 26.5 - 27.5 GHz

Note: 27.5 - 28.35 GHz covered by Fundamental and BE measurements.

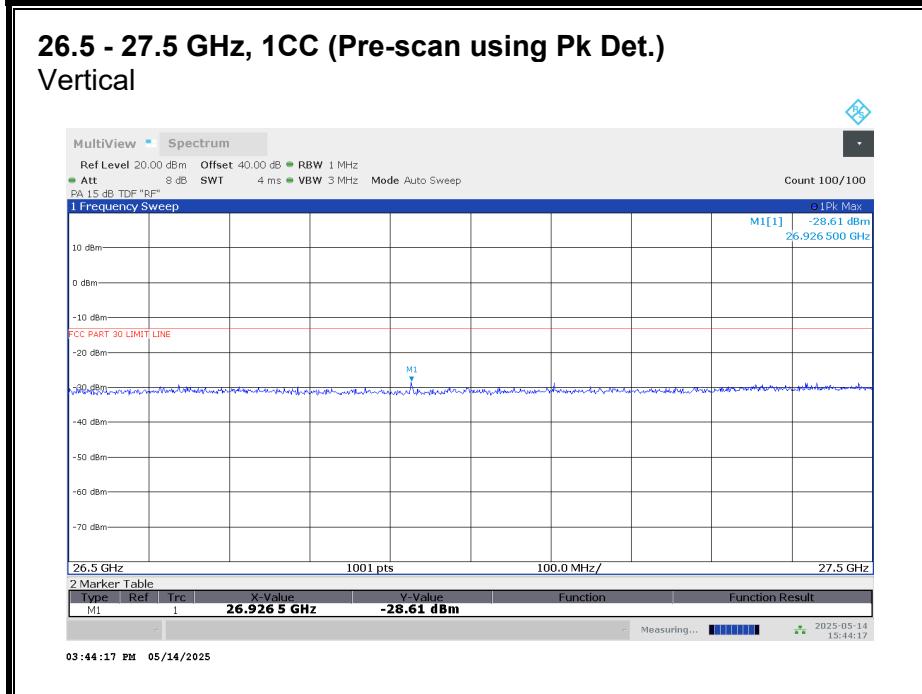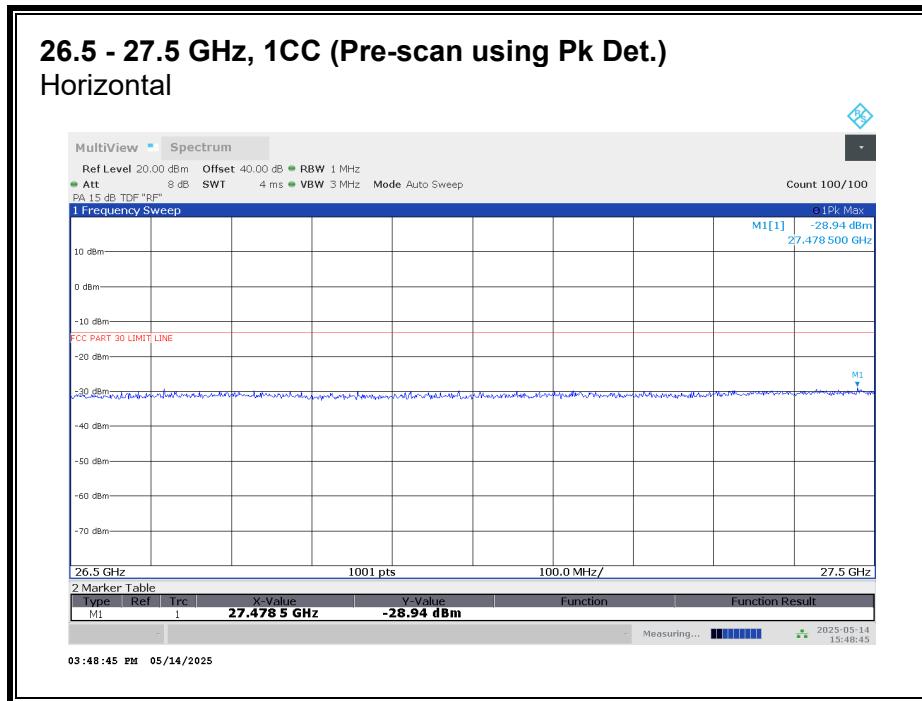

No emission detected using Peak Detection.

26.5 – 27.5 GHz n261, 2CC

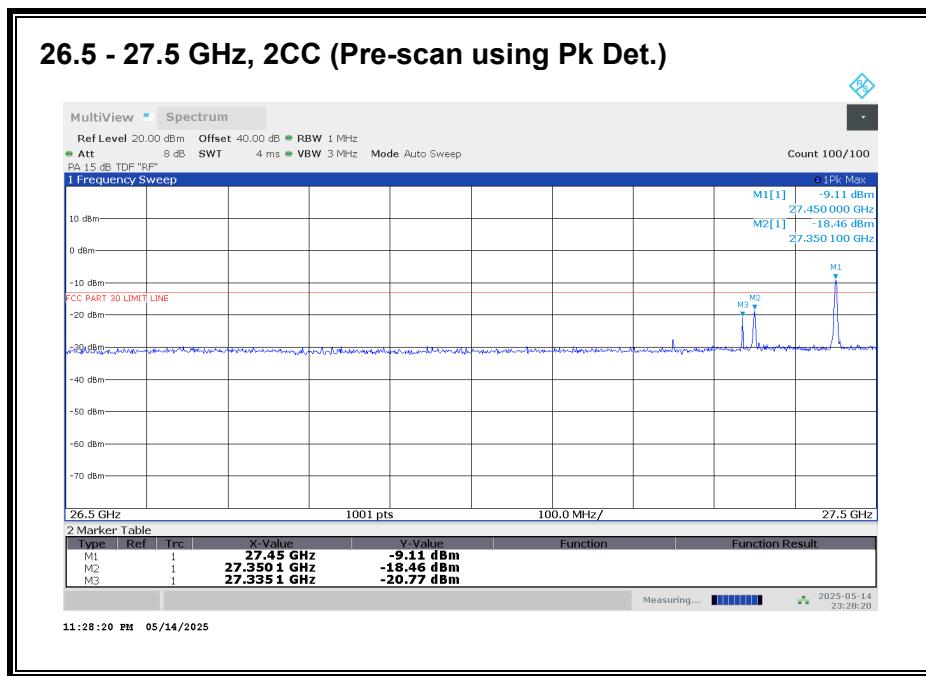

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
27.449	3	-21.45	1.00	-20.45	-13	-7.45

26.5 – 27.5 GHz n261, 3CC

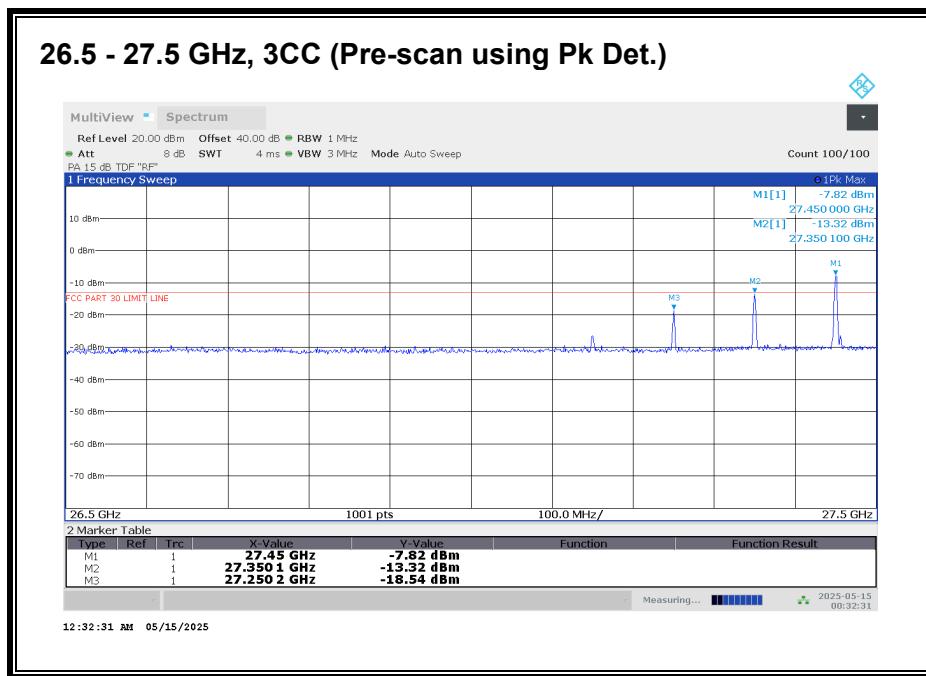

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
27.449	3	V	-13.02	-13	-0.02

26.5 – 27.5 GHz n261, 4CC

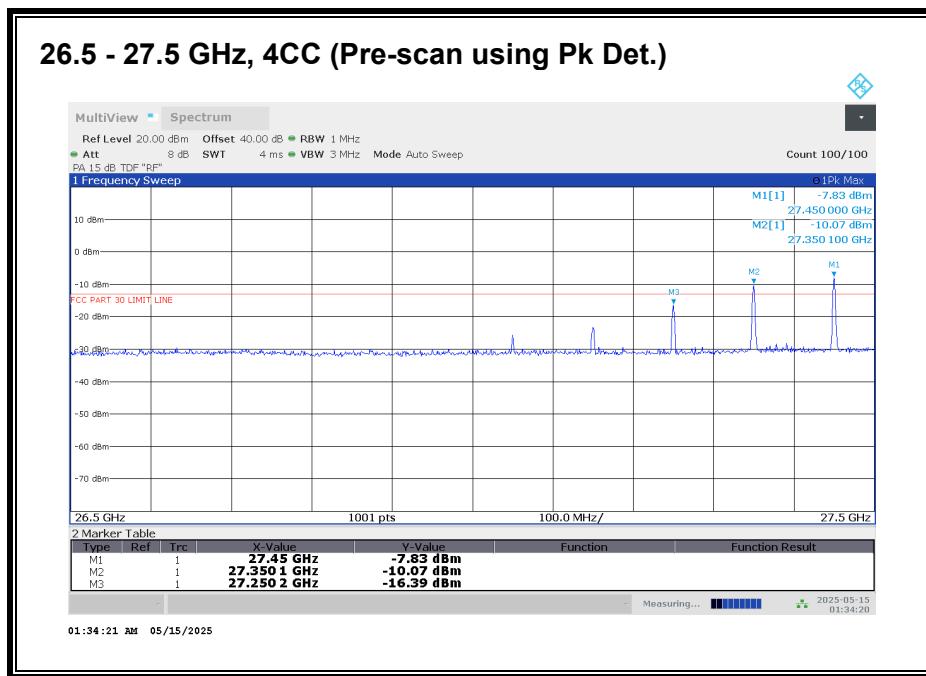

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz) _Low CH_RB Offset 1/32 (1RB-M)



Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
27.449	3	V	-13.61	-13	-0.61

8.4.24. RSE n261 28.35 - 29 GHz

Note: 27.5 - 28.35 GHz covered by Fundamental and BE measurements.

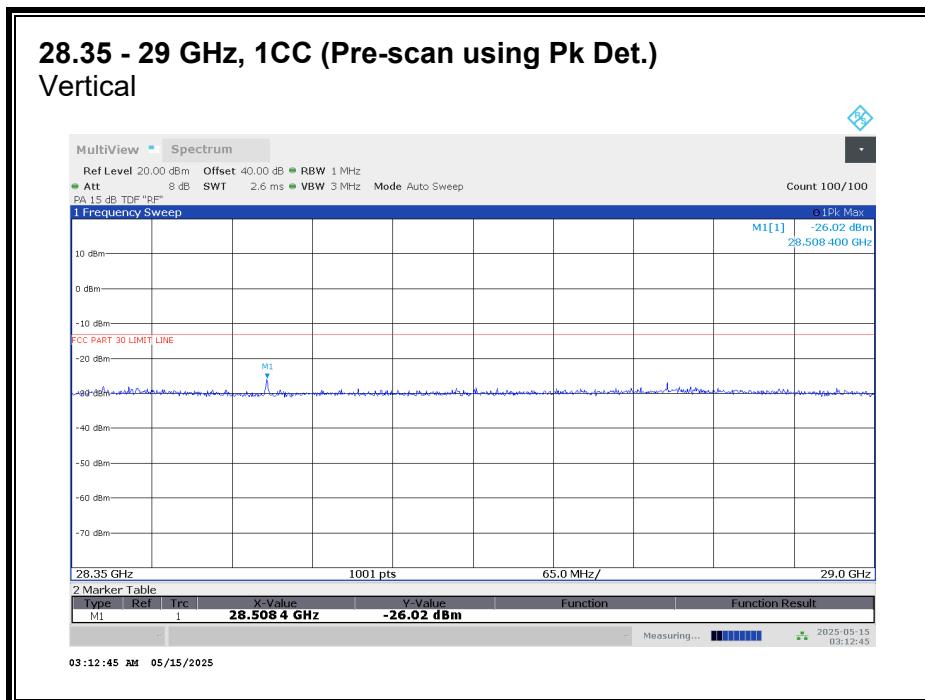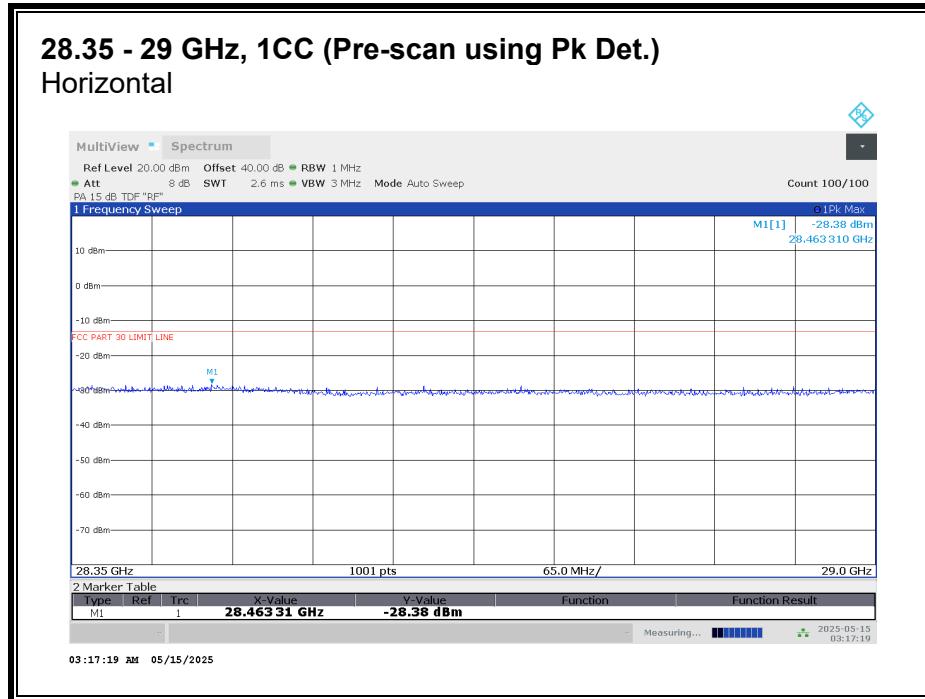


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

28.35 - 29 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.507	3	H	-39.19	-13	-26.19
28.507	3	V	-36.90	-13	-23.90

28.35 - 29 GHz n261, 2CC

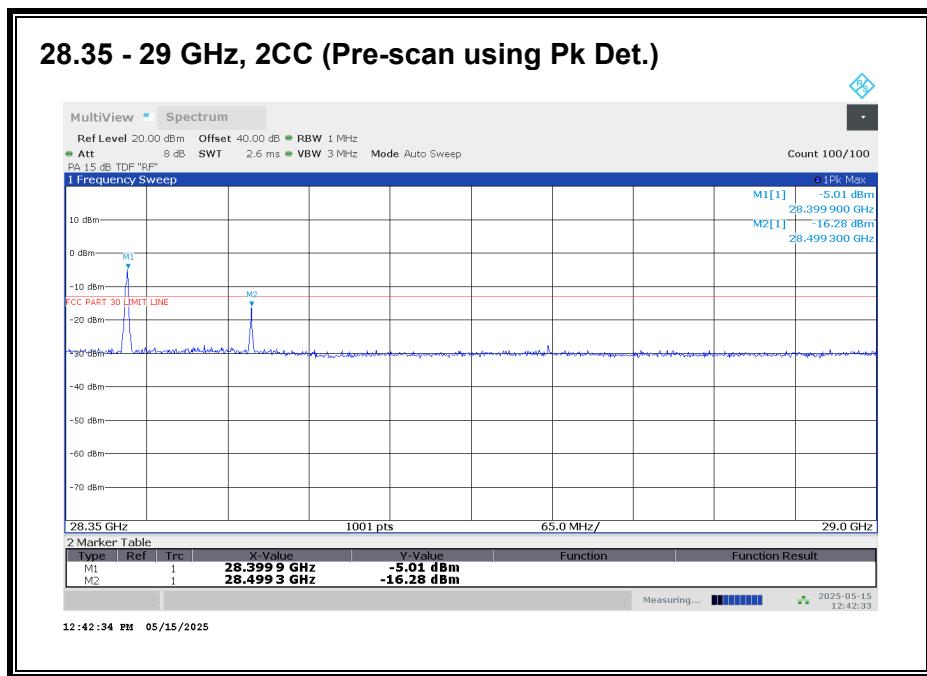

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.399	3	V	-15.96	-13	-2.96

28.35 - 29 GHz n261, 3CC

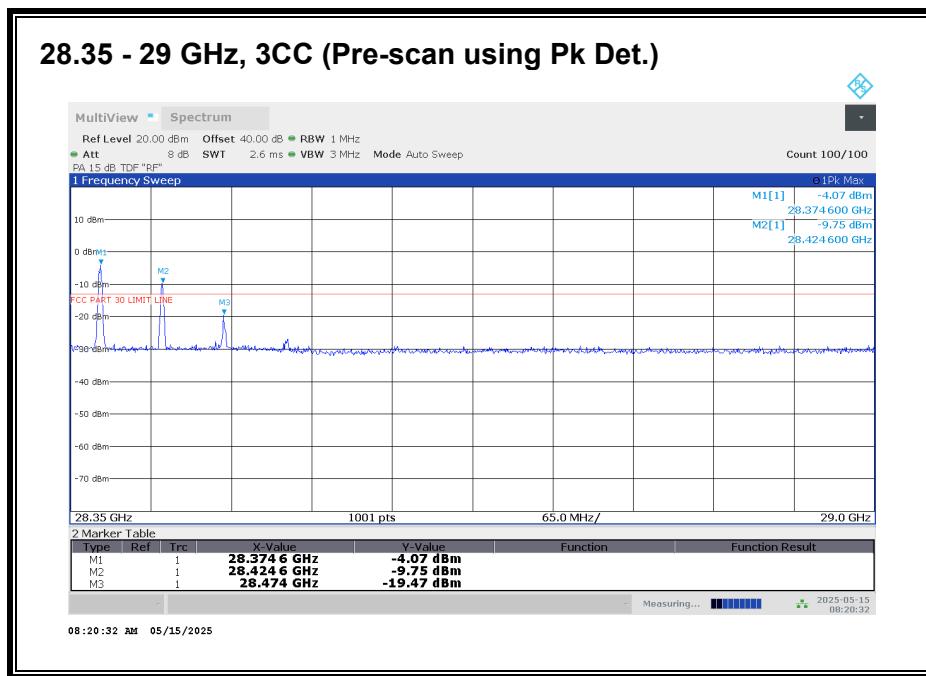

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.374	3	V	-13.12	-13	-0.12

28.35 - 29 GHz n261, 4CC

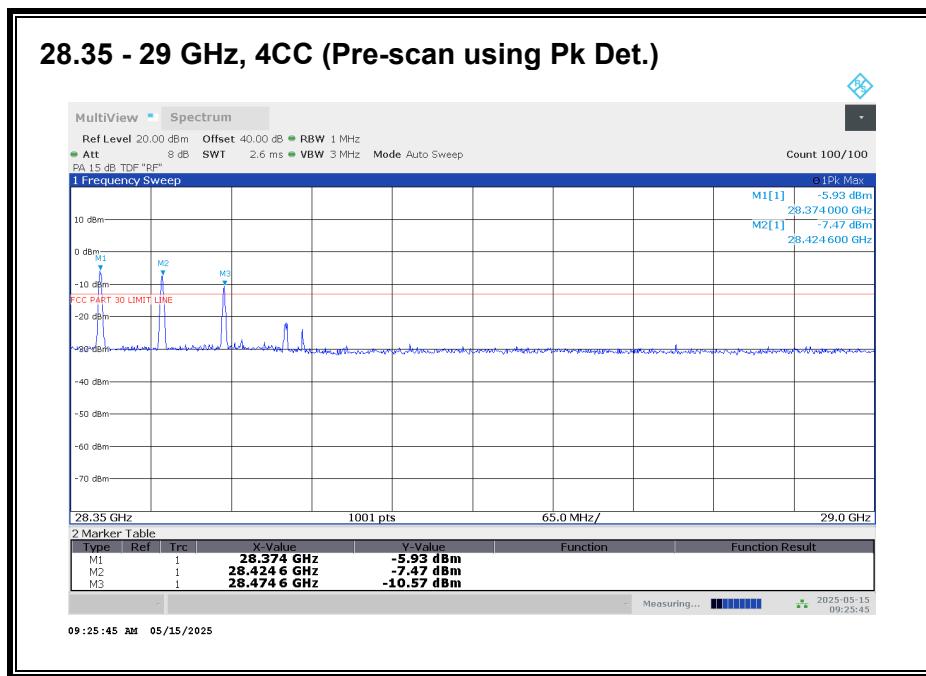

Worst case configuration:



SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
28.374	3	V	-15.19	-13	-2.19

8.4.25. RSE n261 29 - 40 GHz

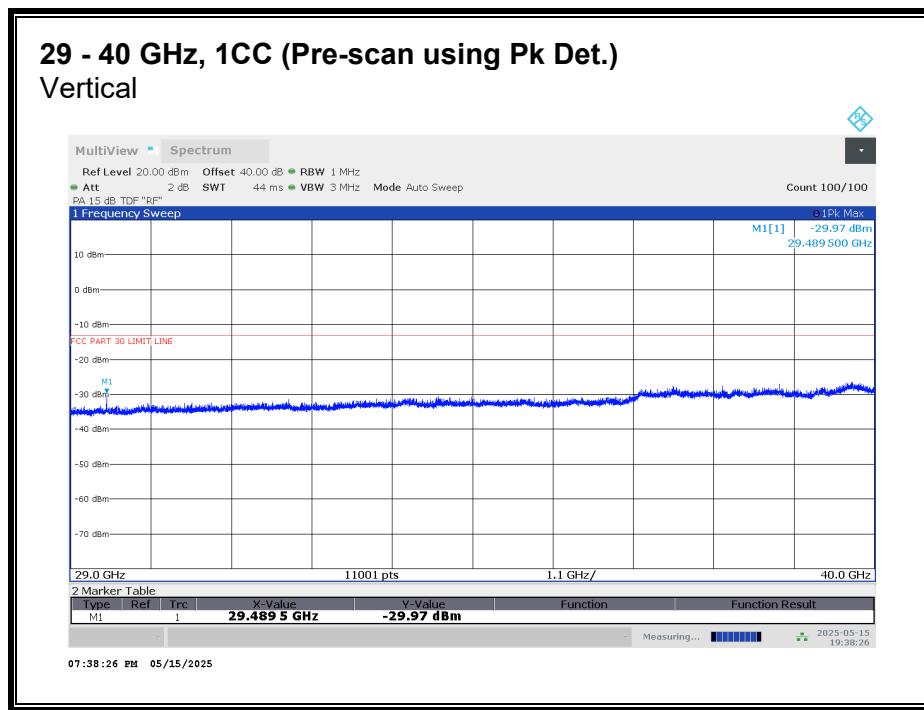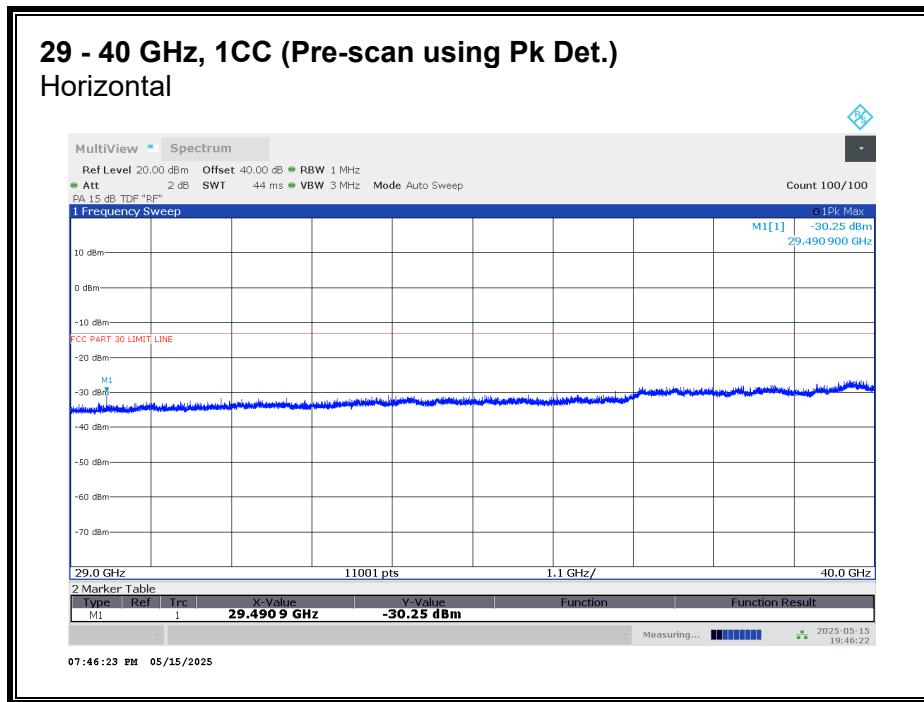

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

29 - 40 GHz n261, 1CC

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
29.490	3	H	-44.27	-13	-31.27
29.490	3	V	-37.10	-13	-24.10