

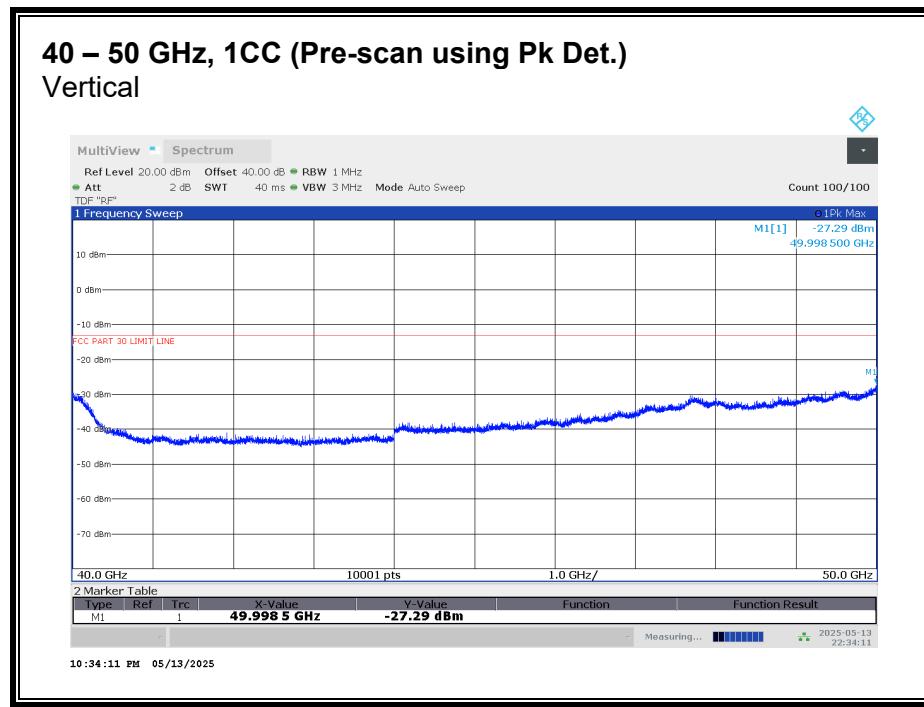
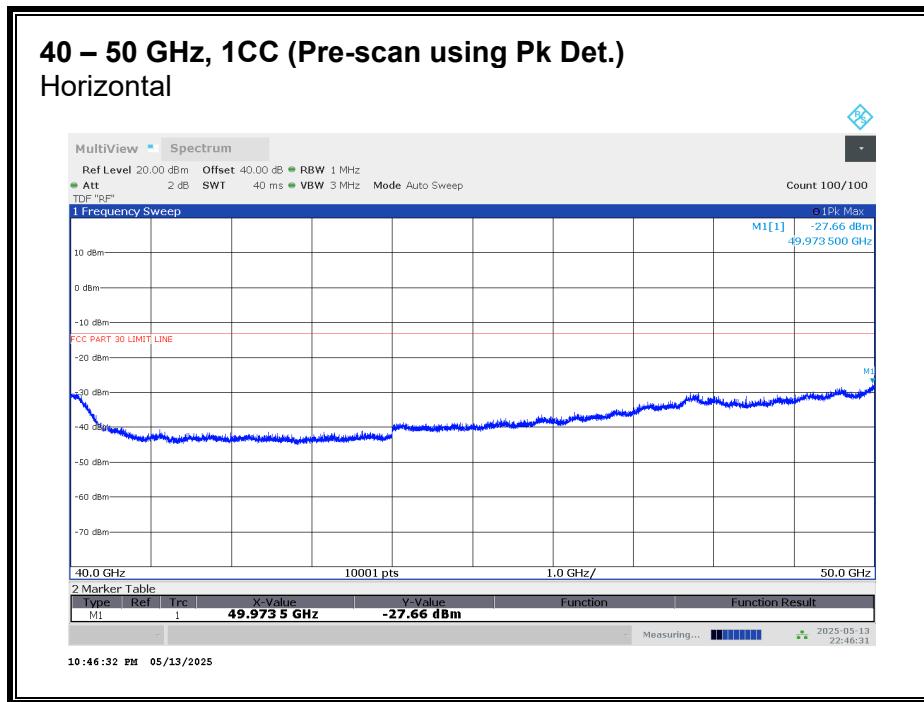


### 8.4.26. RSE n261 40 - 50 GHz

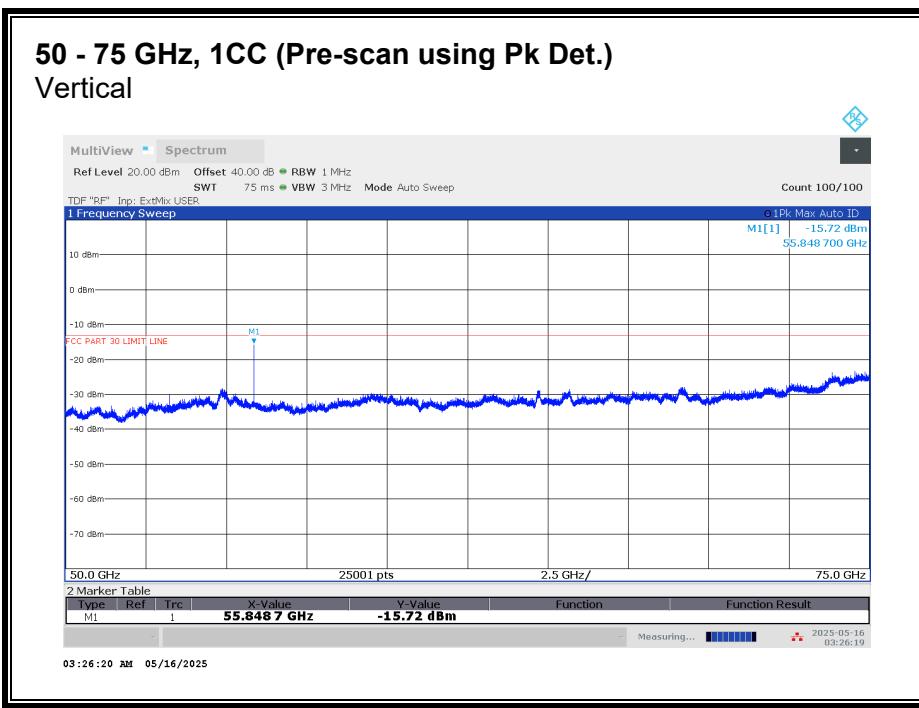

No emission detected using Peak Detection.

### 8.4.27. RSE n261 50 - 75 GHz

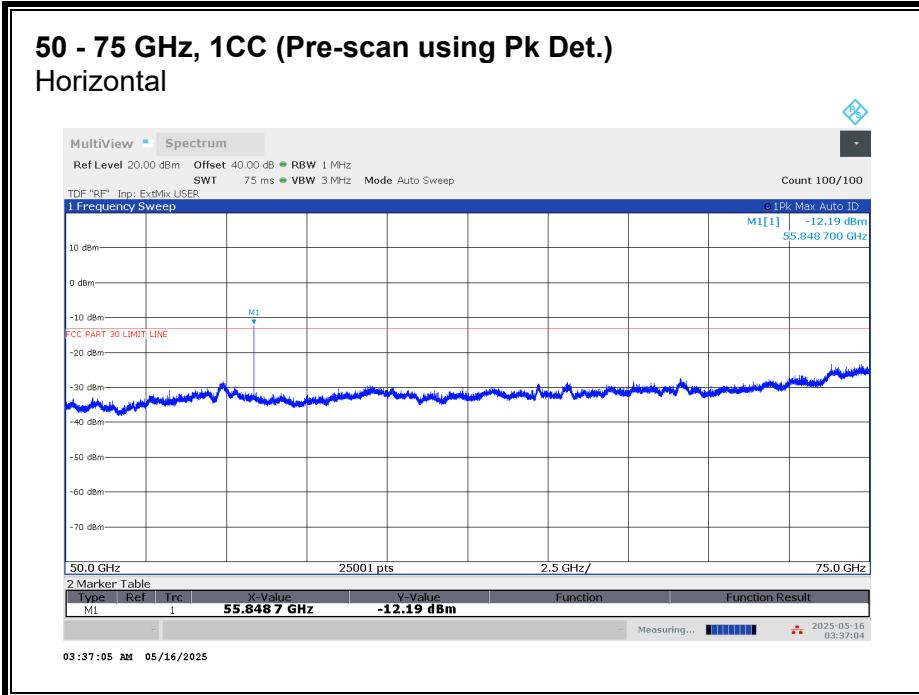


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

**50 - 75 GHz n261, 1CC**


Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
55.849	3	H	-13.11	-13	-0.11
55.849	3	V	-30.90	-13	-17.90

### 8.4.28. RSE n261 75 - 100 GHz

#### 75 - 100 GHz, 1CC (Pre-scan using Pk Det.) Horizontal

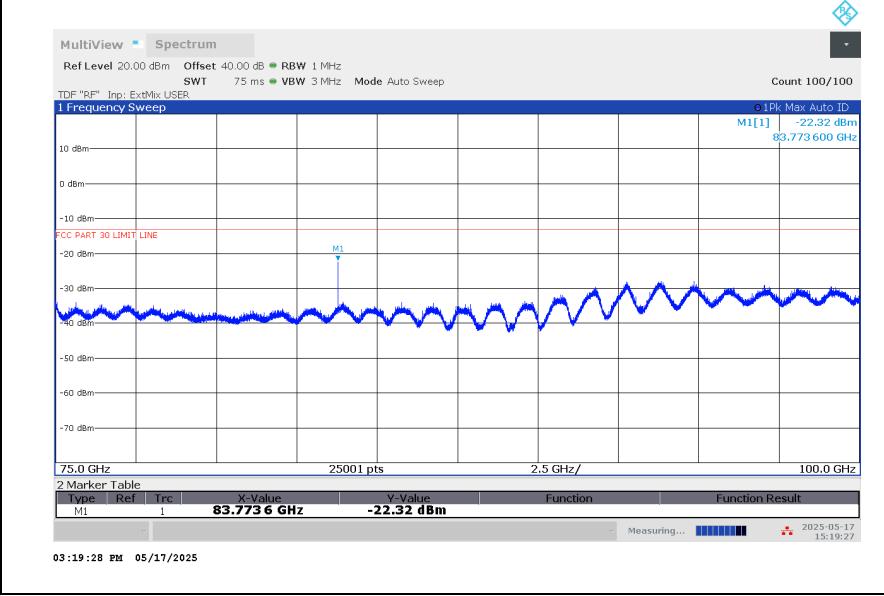

#### 75 - 100 GHz, 1CC (Pre-scan using Pk Det.) Vertical

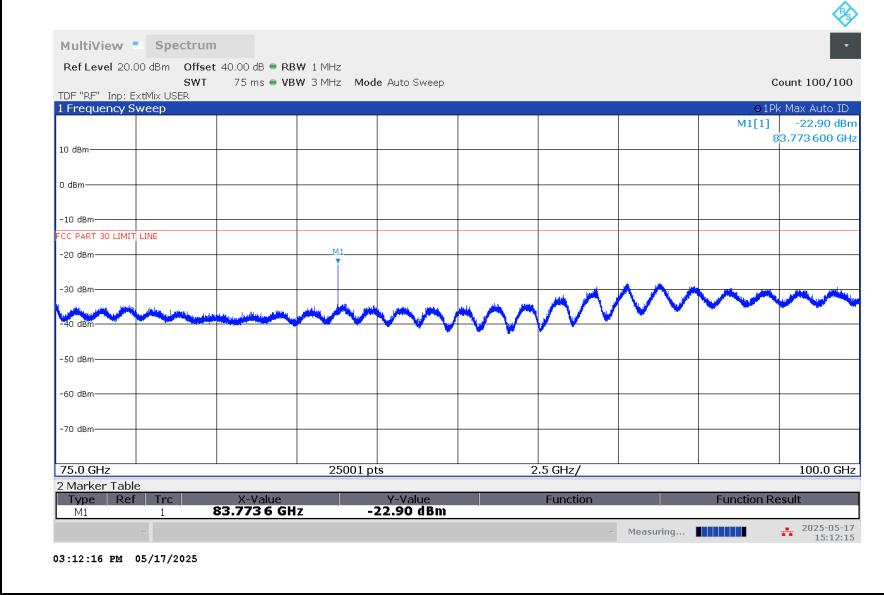


Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

**75 - 100 GHz n261**

<b>Freq.</b>	<b>Meas. Distance</b>	<b>Rx Ant. Polarity</b>	<b>Corrected Avg EIRP</b>	<b>TRP Limit</b>	<b>Margin</b>
<b>(GHz)</b>	<b>(m)</b>	<b>H/V</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>
83.773	3	H	-27.65	-13	-14.65
83.773	3	V	-42.54	-13	-29.54

### 8.4.29. RSE n260 30 – 1000 MHz

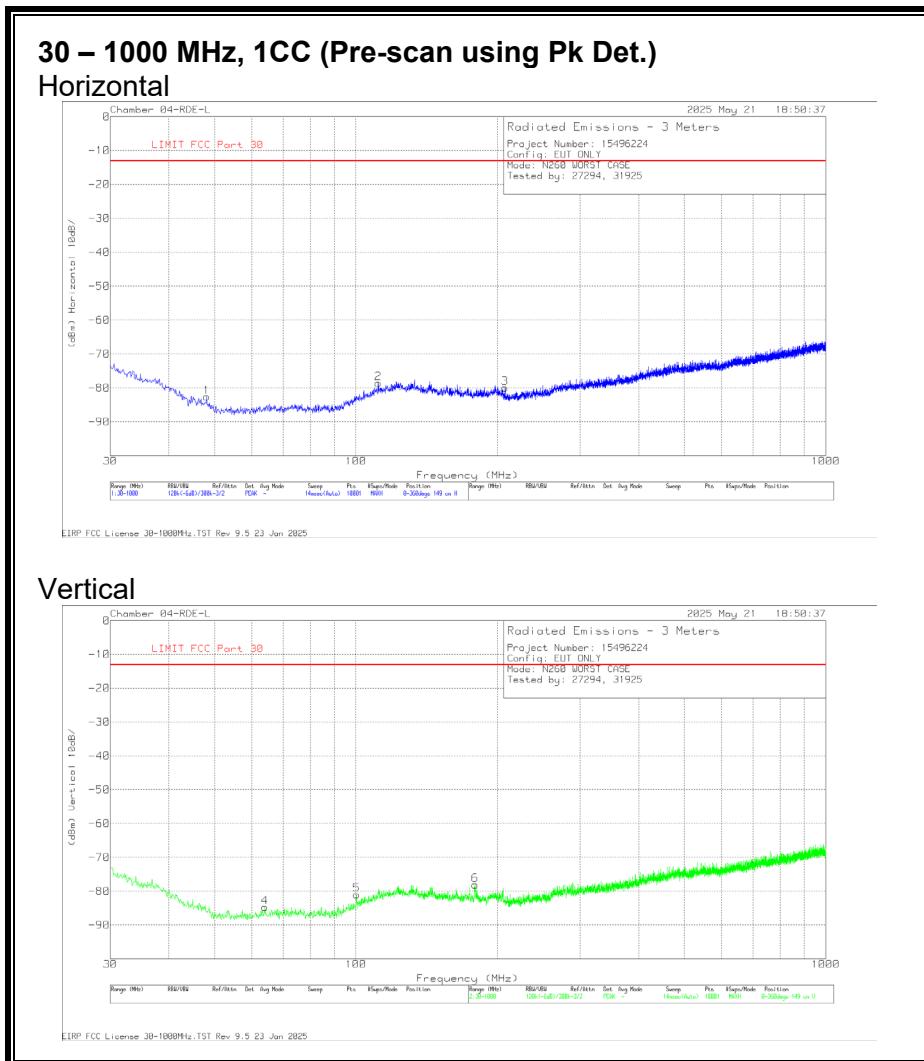


#### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	174374 ACF (dB/m)	Amp/CbIs (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	48.139	-77.76	Pk	14.6	-31.2	11.7	-82.66	-13	-69.66	0-360	149	H
2	111.48	-78.44	Pk	18.6	-30.5	11.7	-78.64	-13	-65.64	0-360	149	H
3	207.704	-78.23	Pk	16.7	-30.1	11.7	-79.93	-13	-66.93	0-360	149	H
4	64.047	-78.82	Pk	13.7	-31.3	11.7	-84.72	-13	-71.72	0-360	149	V
5	100.325	-77.94	Pk	16.2	-30.9	11.7	-80.94	-13	-67.94	0-360	149	V
6	179.283	-77.05	Pk	17.2	-30.0	11.7	-78.15	-13	-65.15	0-360	149	V

Pk - Peak detector

#### 8.4.30. RSE n260 1 - 18 GHz


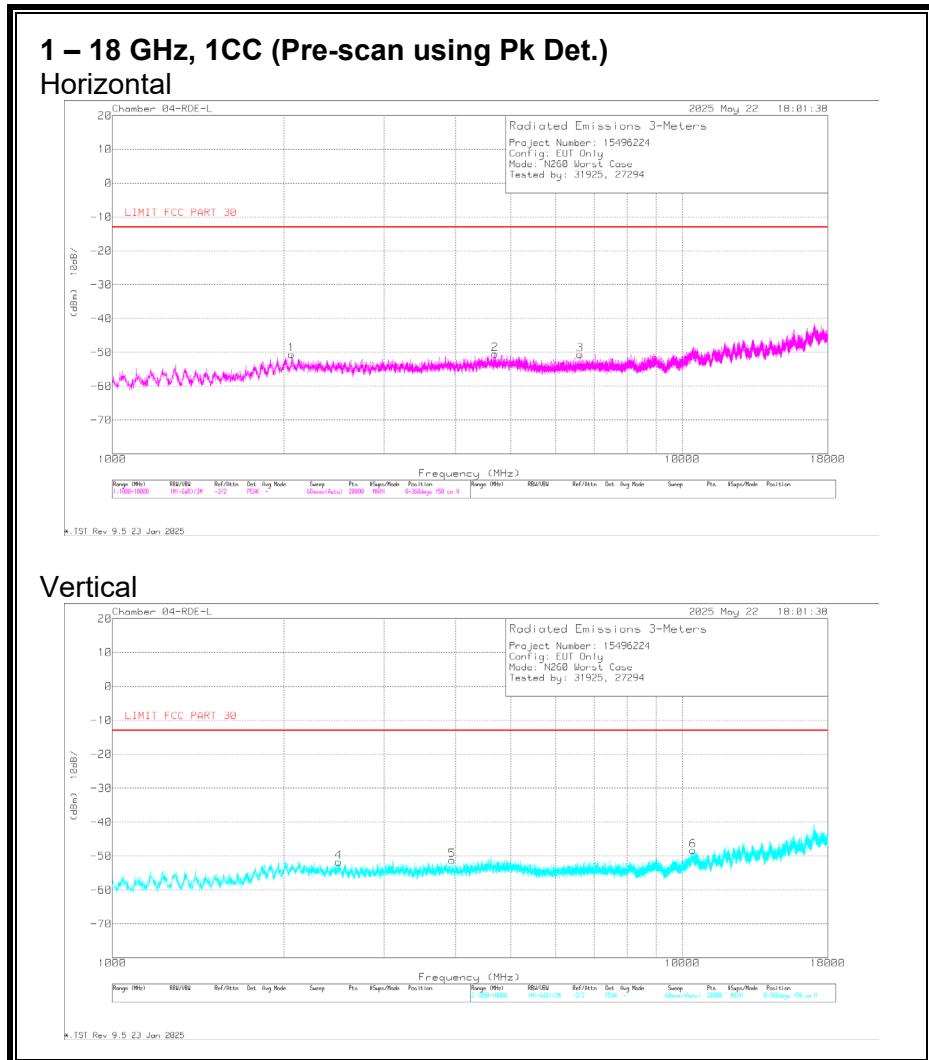


## Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2064.254	-47.74	Pk	31.6	-46.1	11.7	-50.54	-13	-37.54	0-360	150	H
2	4691.737	-52.63	Pk	34.2	-43.7	11.7	-50.43	-13	-37.43	0-360	150	H
3	6614.534	-57.35	Pk	35.8	-40.7	11.7	-50.55	-13	-37.55	0-360	150	H
4	2495.226	-50.00	Pk	32.5	-45.9	11.7	-51.70	-13	-38.70	0-360	150	V
5	3947.949	-51.93	Pk	33.4	-44.4	11.7	-51.23	-13	-38.23	0-360	150	V
6	10443.978	-58.34	Pk	37.8	-39.5	11.7	-48.34	-13	-35.34	0-360	150	V



Pk - Peak detector

### 8.4.31. RSE n260 18 - 26.5 GHz

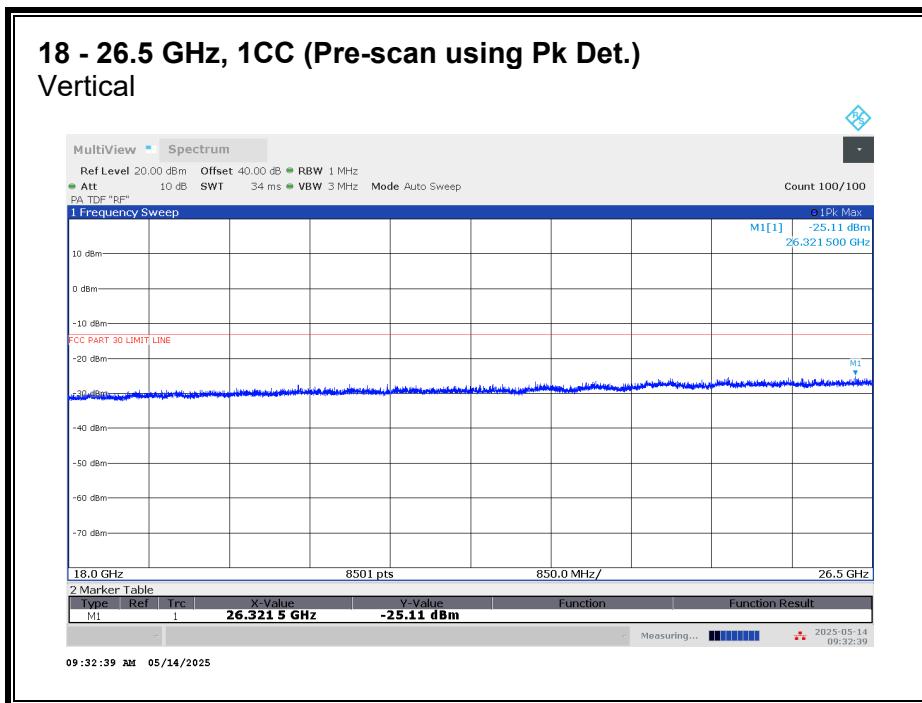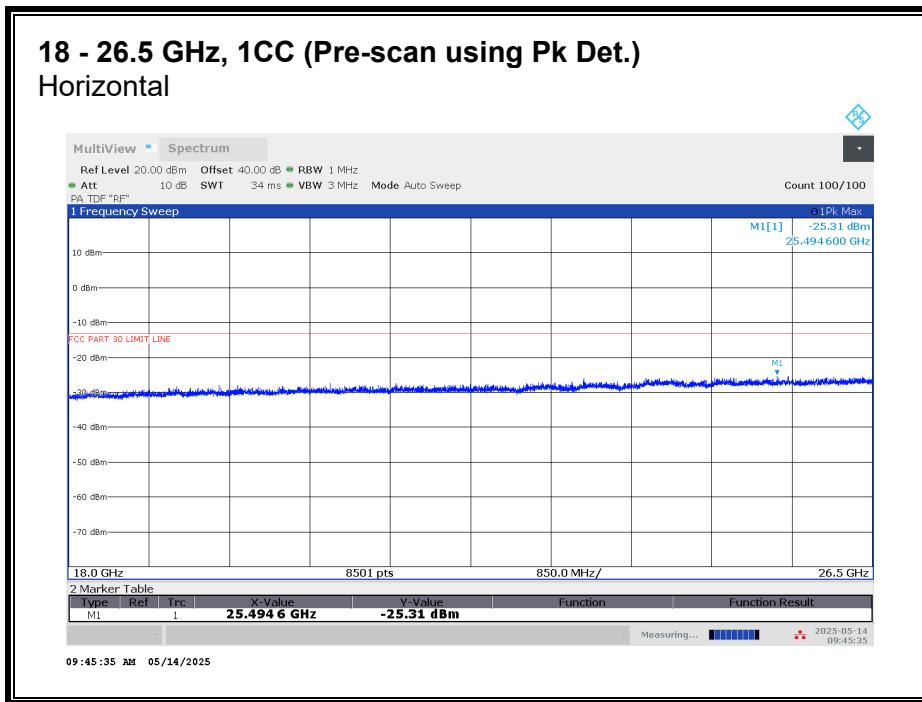



No emission detected using Peak Detection.

### 8.4.32. RSE n260 26.5 - 36 GHz

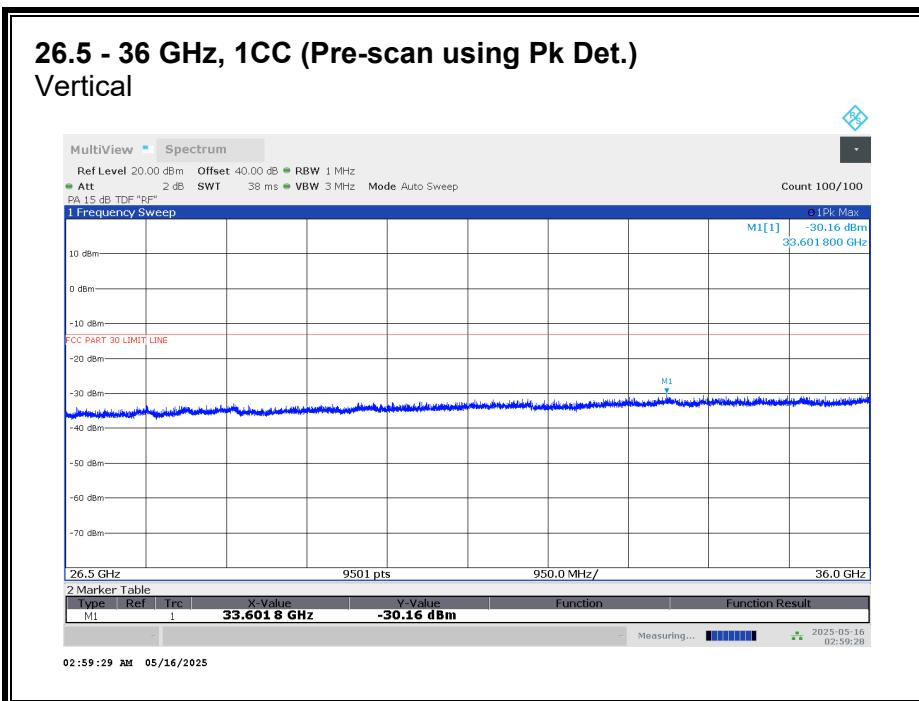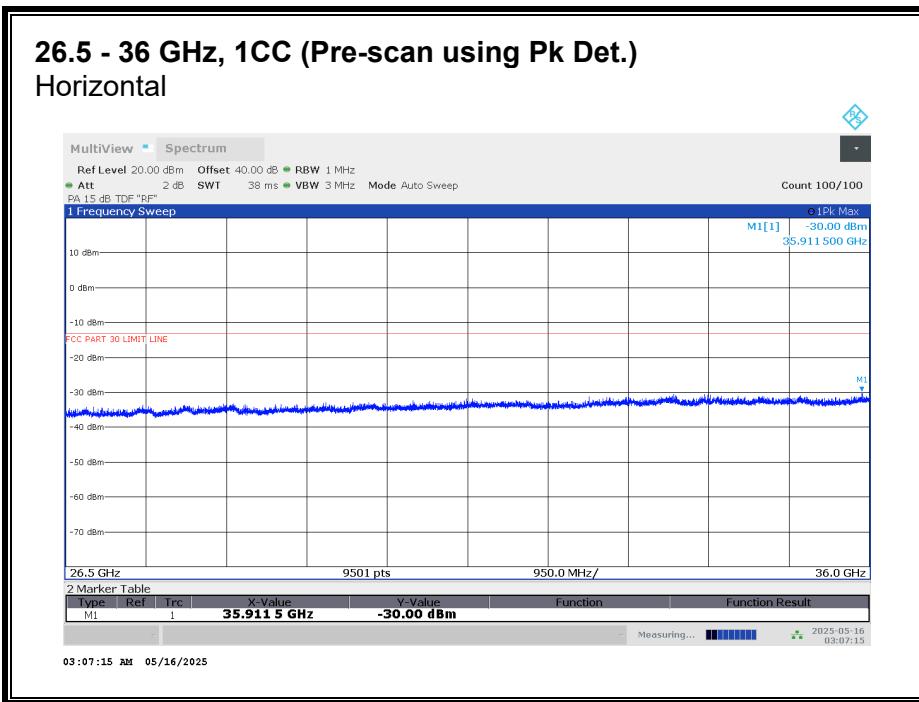


No emission detected using Peak Detection.

### 8.4.33. RSE n260 36 – 37 GHz

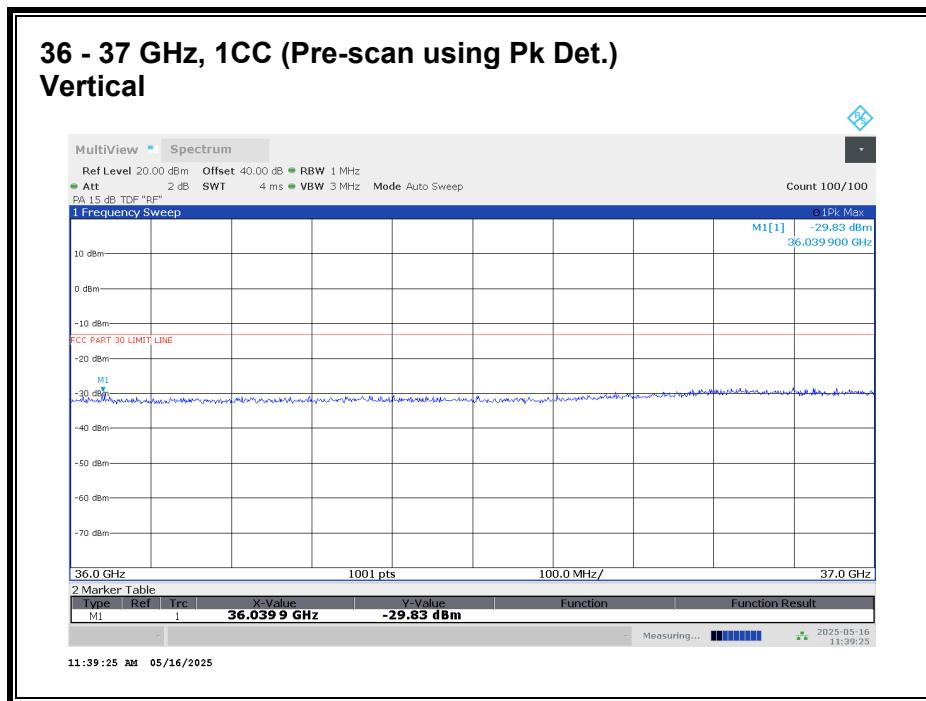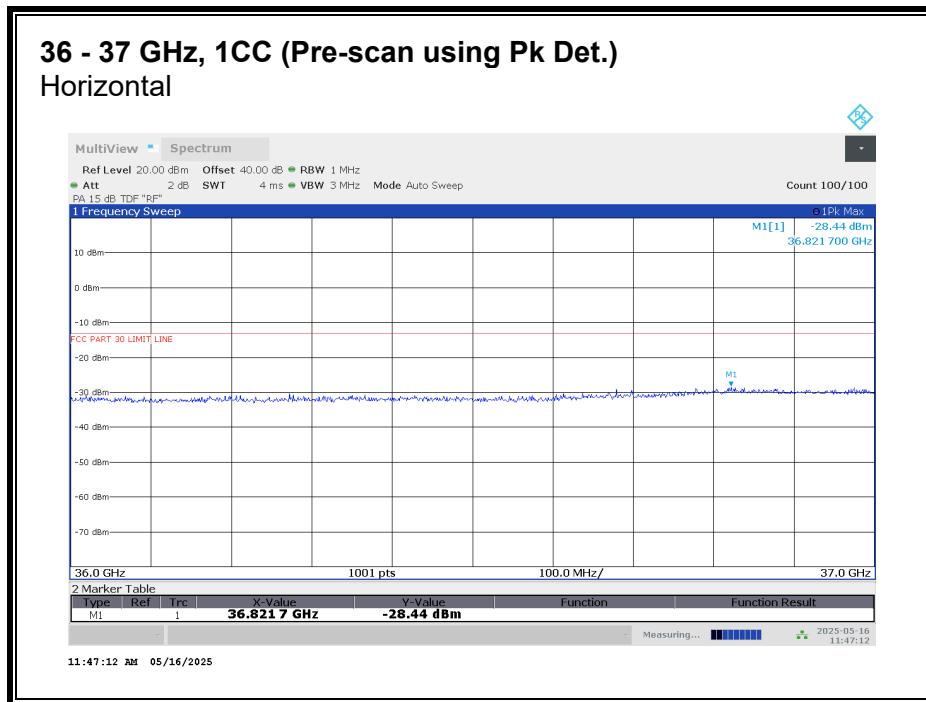

No emission detected using Peak Detection.

**36 - 37 GHz n260, 2CC**

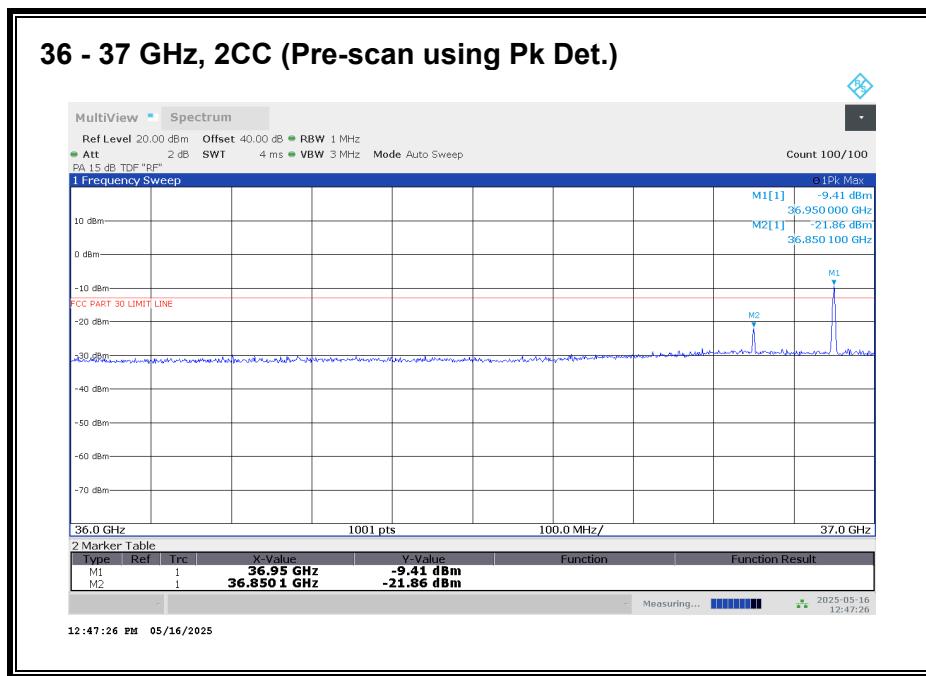

Worst case configuration:


SISO-DUAL\_QPSK\_(100 MHz + 100 MHz)\_Low CH\_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
36.949	3	V	-16.88	-13	-3.88

**36 - 37 GHz n260, 3CC**

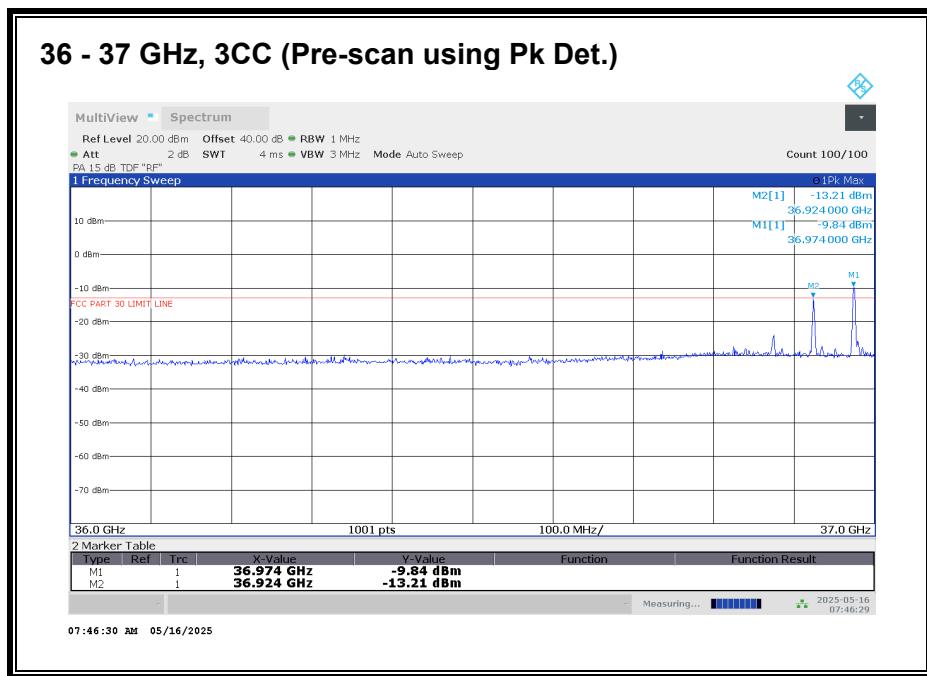

Worst case configuration:


SISO-DUAL\_QPSK\_(50 MHz + 50 MHz + 50 MHz) \_Low CH\_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
36.974	3	V	-16.25	-13	-3.25

## 36 - 37 GHz n260, 4CC

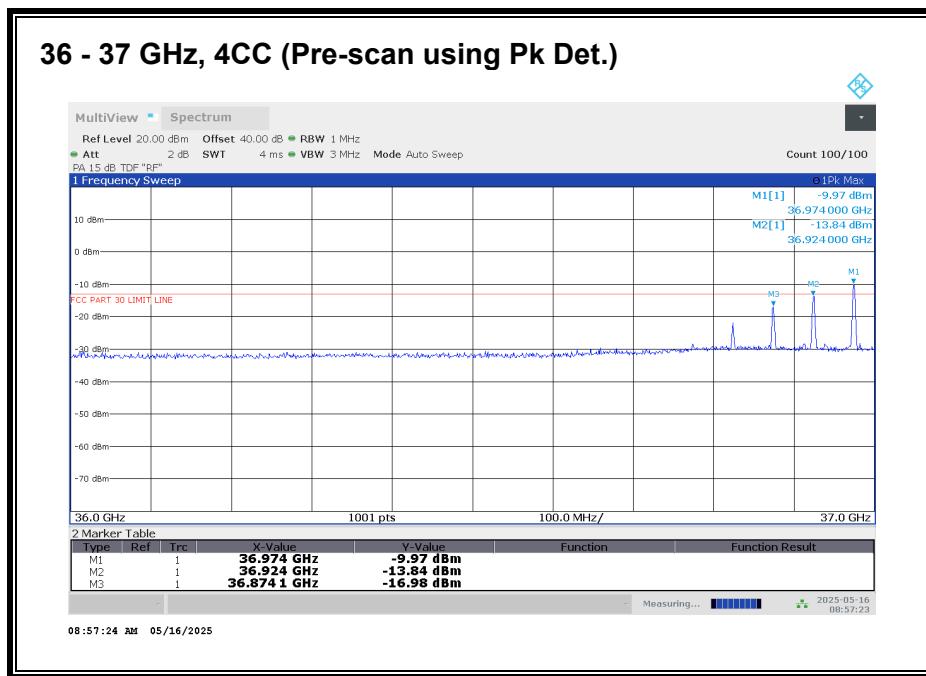

Worst case configuration:

SISO-DUAL\_QPSK\_(50 MHz + 50 MHz + 50 MHz + 50 MHz)\_Low CH\_RB Offset 1/15 (1RB-M)



Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
36.974	3	V	-17.72	-13	-4.72

#### 8.4.34. RSE n260 40 – 41 GHz

Note: 37 - 40 GHz covered by Fundamental and BE measurements.

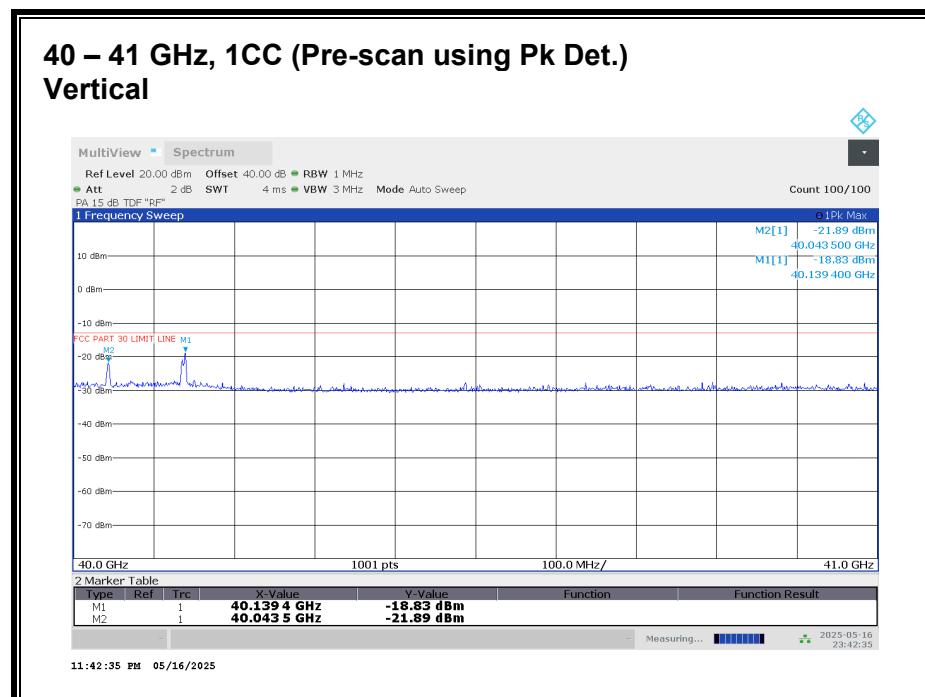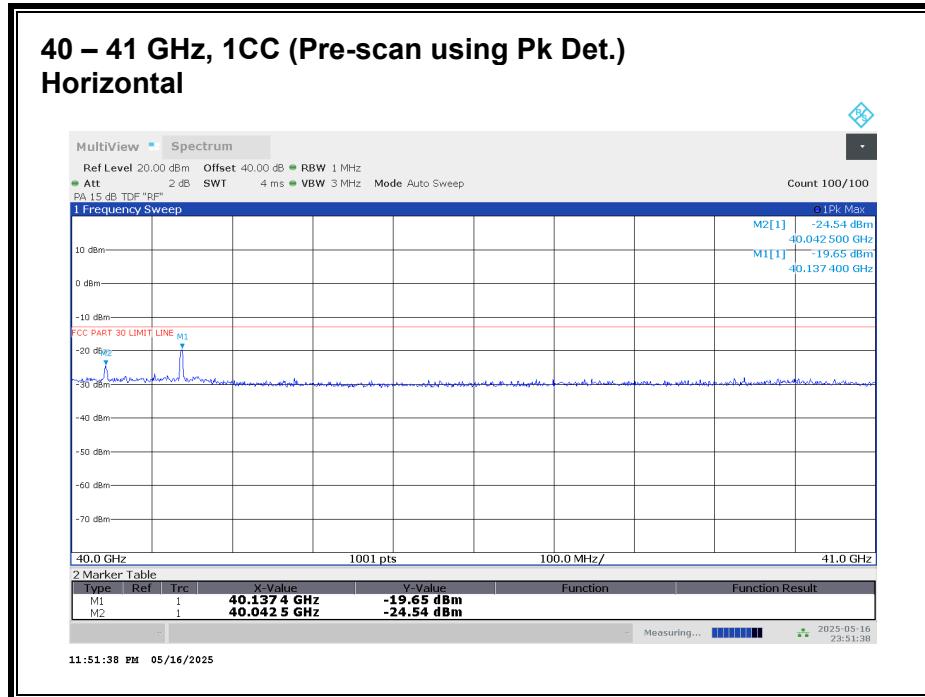


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

**40 - 41 GHz n260, 1CC**

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
40.137	3	H	-28.55	-13	-15.55
40.137	3	V	-32.41	-13	-19.41
40.043	3	H	-34.24	-13	-21.24
40.043	3	V	-29.20	-13	-16.20

## 40 – 41 GHz n260, 2CC

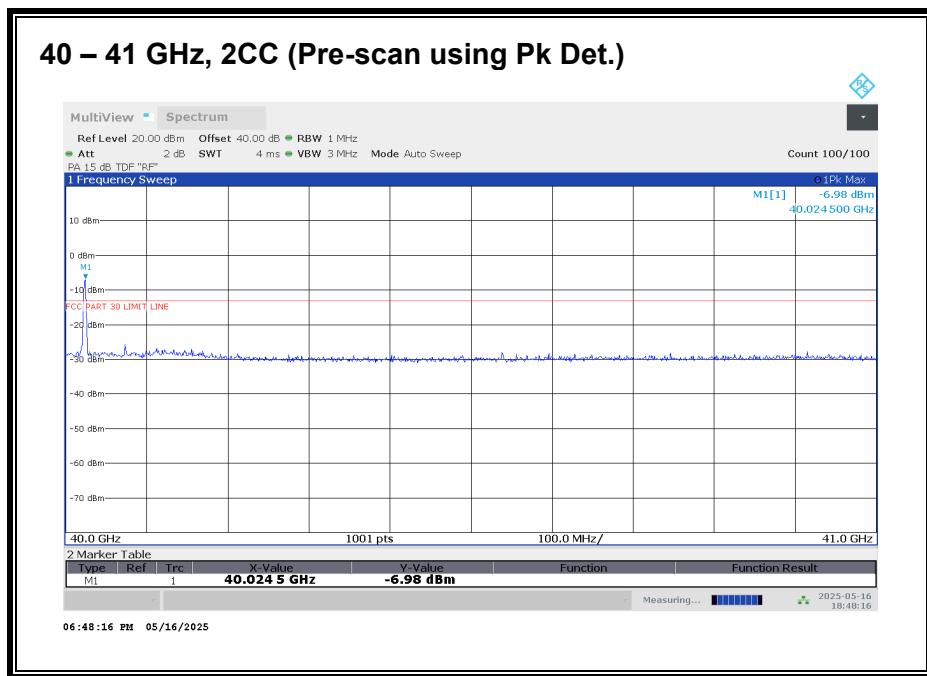

Worst case configuration:


SISO-DUAL\_QPSK\_(50 MHz + 50 MHz)\_High CH\_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
40.024	3	V	-13.39	-13	-0.39

**40 – 41 GHz n260, 3CC**

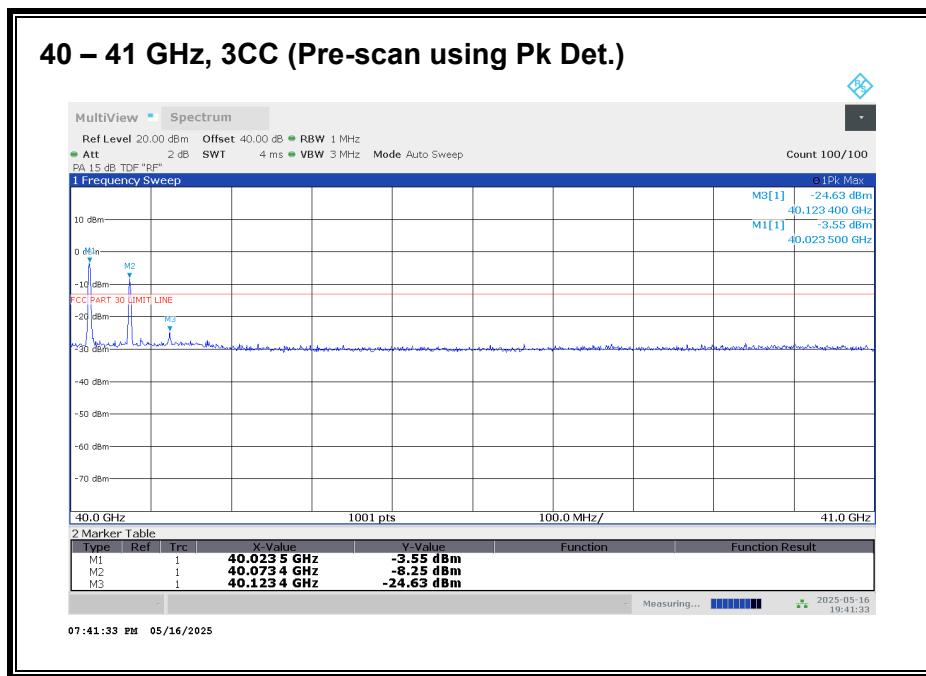

Worst case configuration:


SISO-DUAL\_QPSK\_(50 MHz + 50 MHz + 50 MHz)\_High CH\_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	TRP	ΔTRP	Corrected TRP	TRP Limit	Margin
(GHz)	(m)	(dBm)	(dB)	(dBm)	(dBm)	(dB)
40.024	3	-22.85	1.00	-21.85	-13	-8.85

## 40 – 41 GHz n260, 4CC

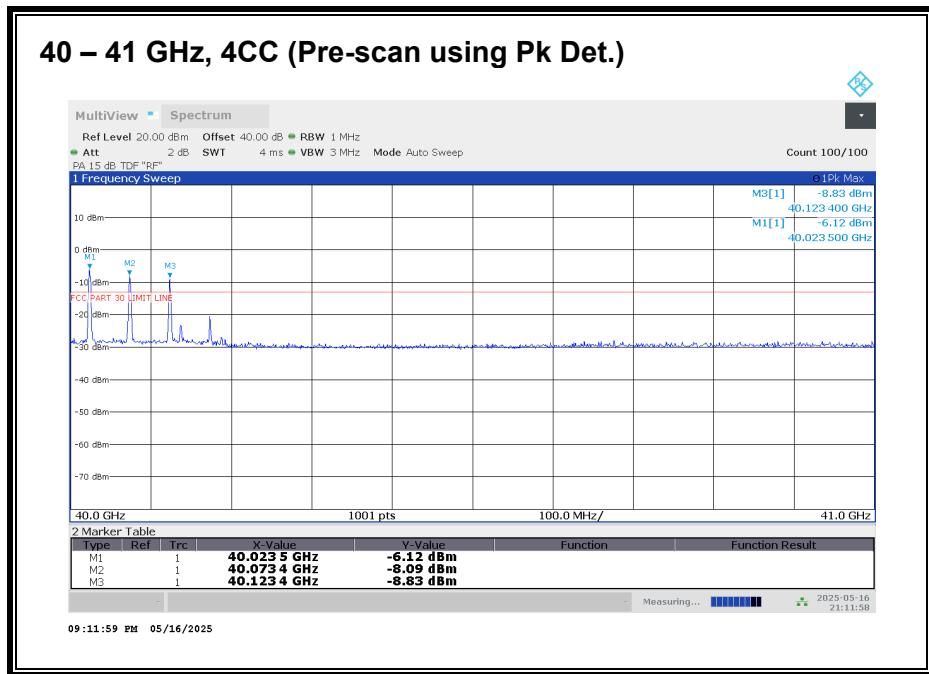

Worst case configuration:



SISO-DUAL\_QPSK\_(50 MHz + 50 MHz + 50 MHz + 50 MHz)\_High CH\_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP or TRP was measured.

All emissions were investigated, and the highest emission was reported.

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
40.024	3	V	-14.02	-13	-1.02

### 8.4.35. RSE n260 41 – 50 GHz

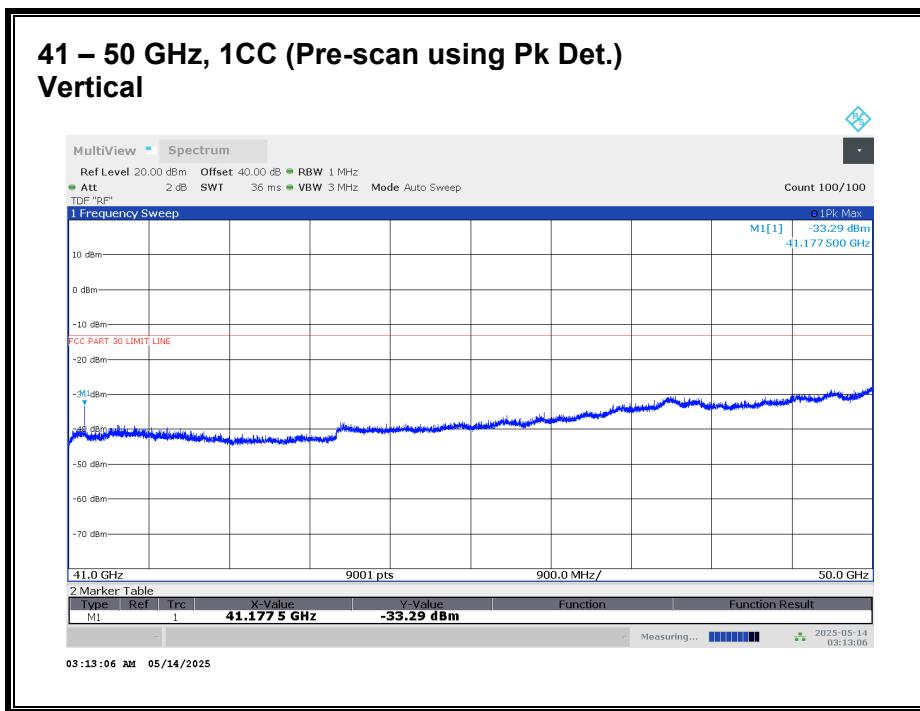
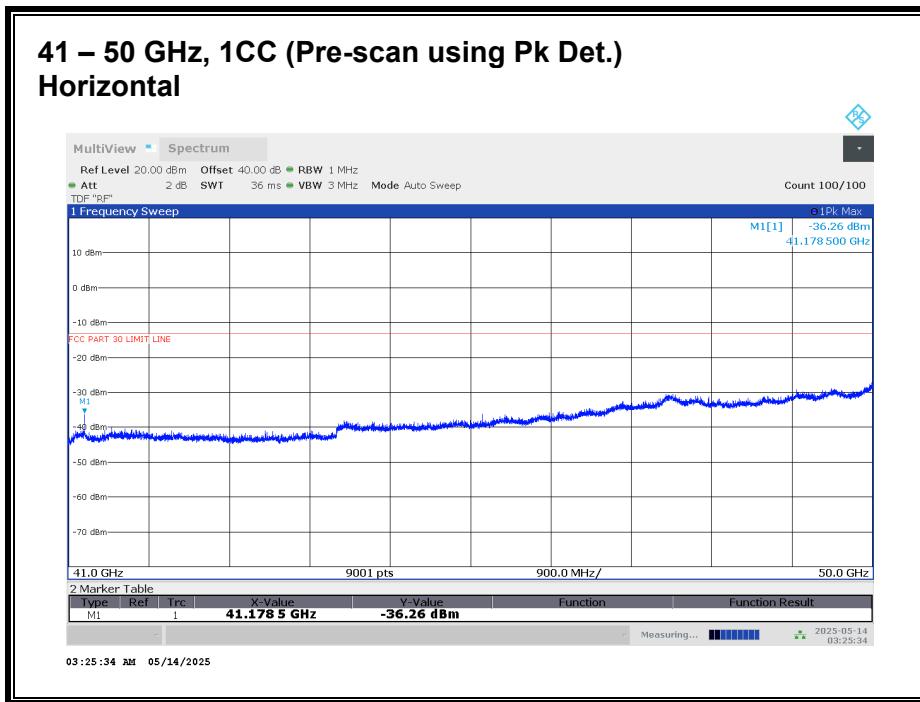


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

**41 - 50 GHz n260, 1CC**



Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
41.178	3	H	-40.48	-13	-27.48
41.178	3	V	-36.01	-13	-23.01

### 8.4.36. RSE n260 50 - 75 GHz

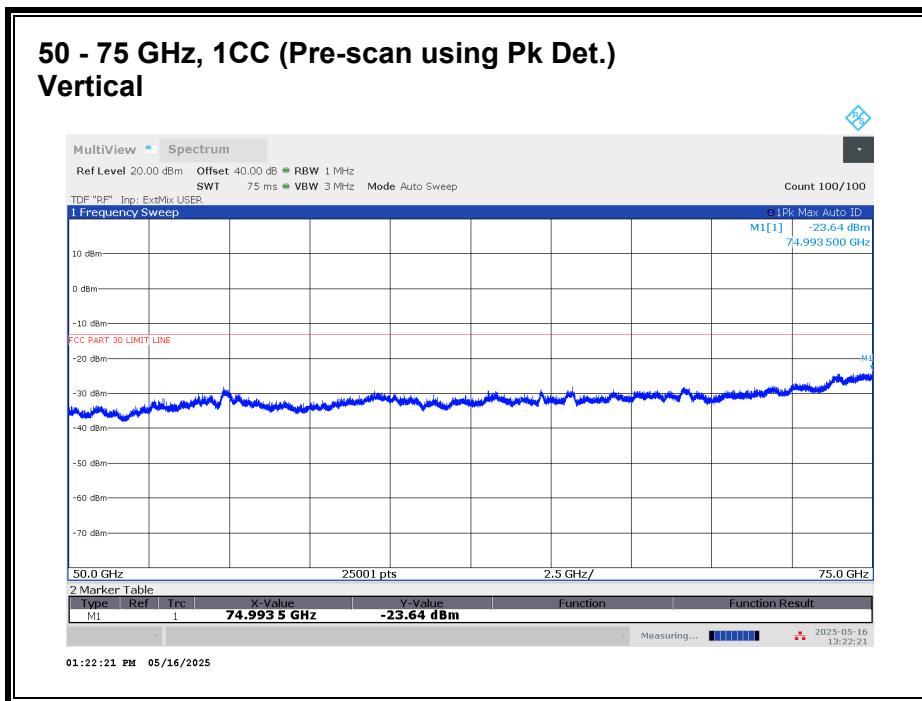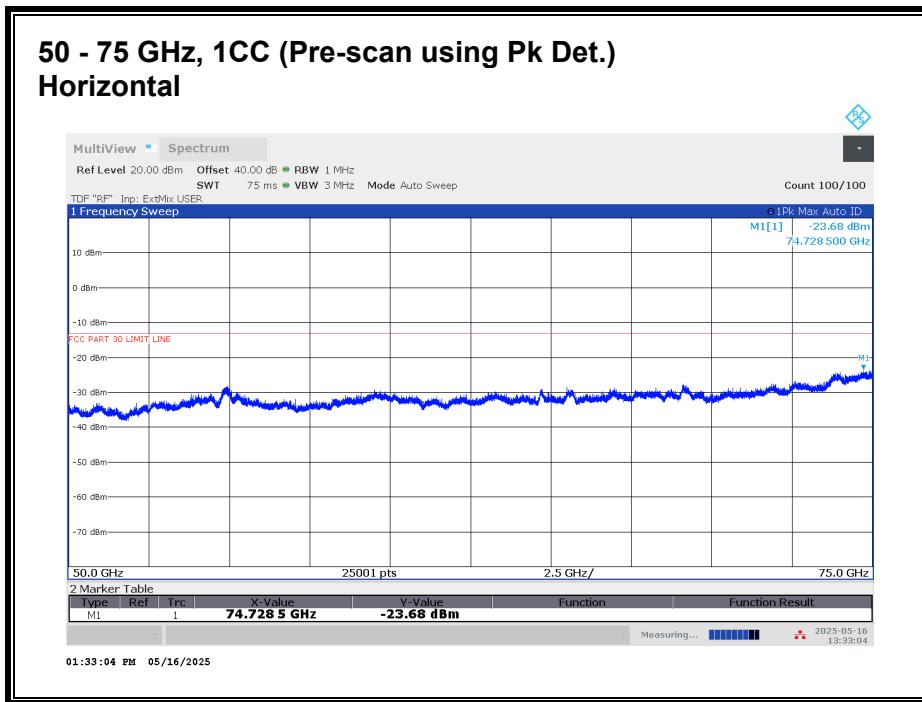

No emission detected using Peak Detection.

### 8.4.37. RSE n260 75 - 110 GHz

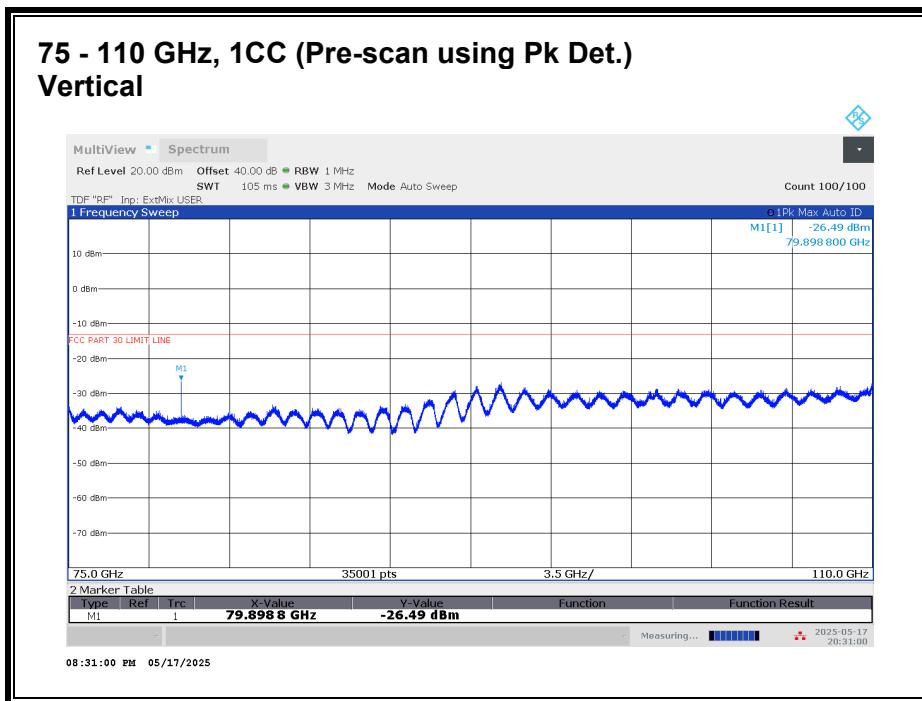
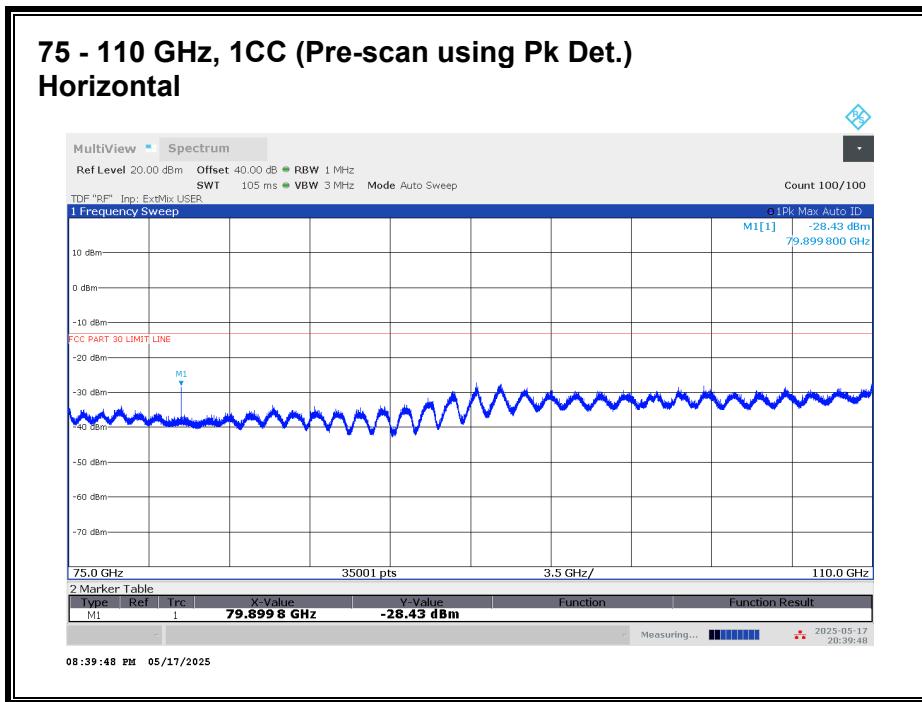


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

**75 - 110 GHz n260, 1CC**

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
79.898	3	H	-35.16	-13	-22.16
79.898	3	V	-27.78	-13	-14.78

### 8.4.38. RSE n260 110 - 170 GHz

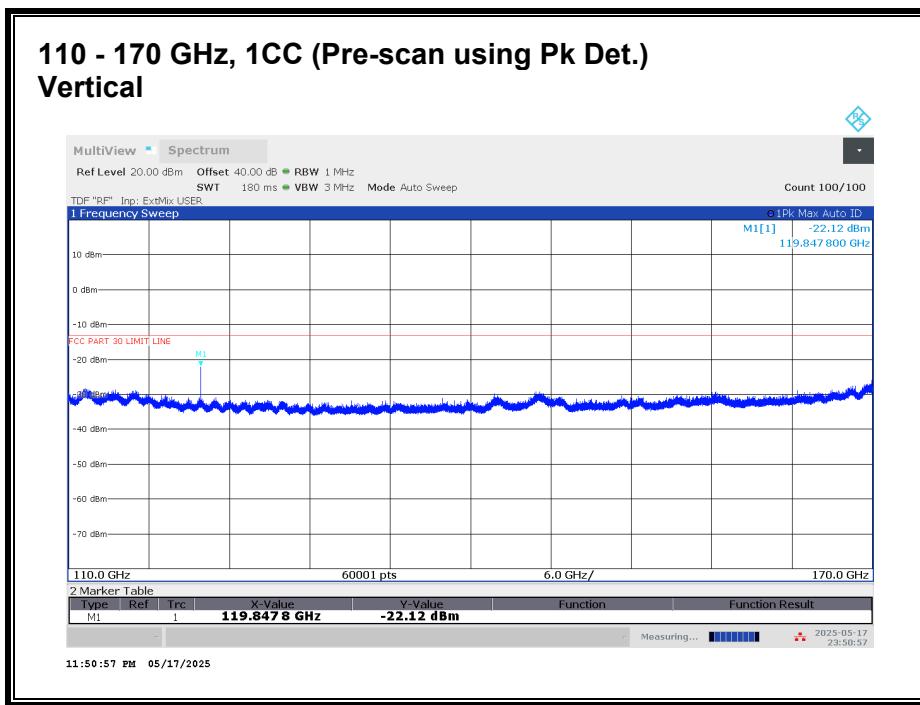
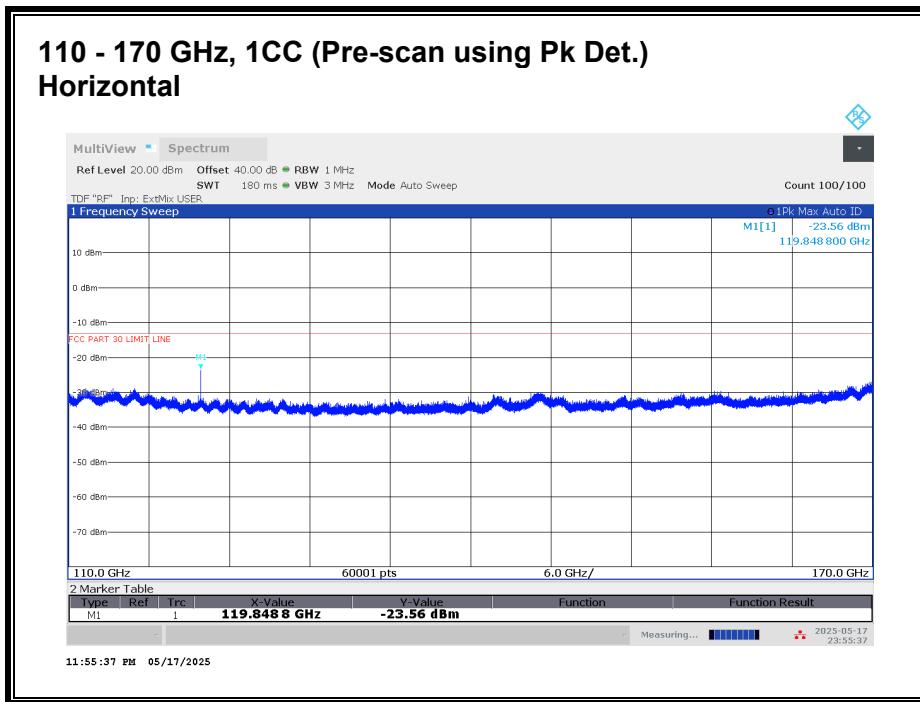


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

**110 - 170 GHz n260, 1CC**

Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
119.847	1	H	-25.29	-13	-12.29
119.847	1	V	-38.29	-13	-25.29

### 8.4.39. RSE n260 170 - 200 GHz

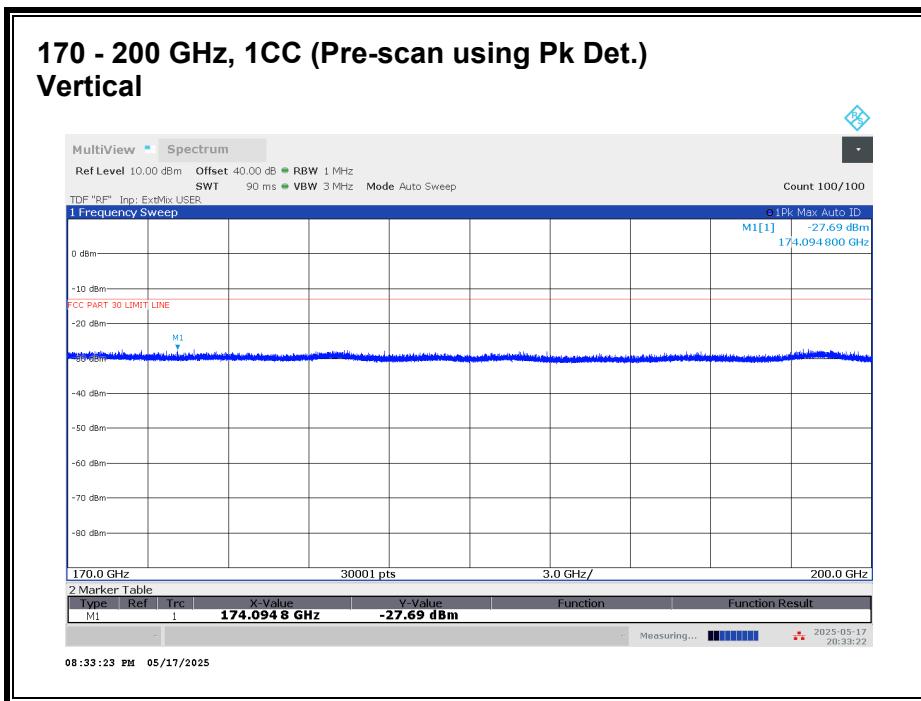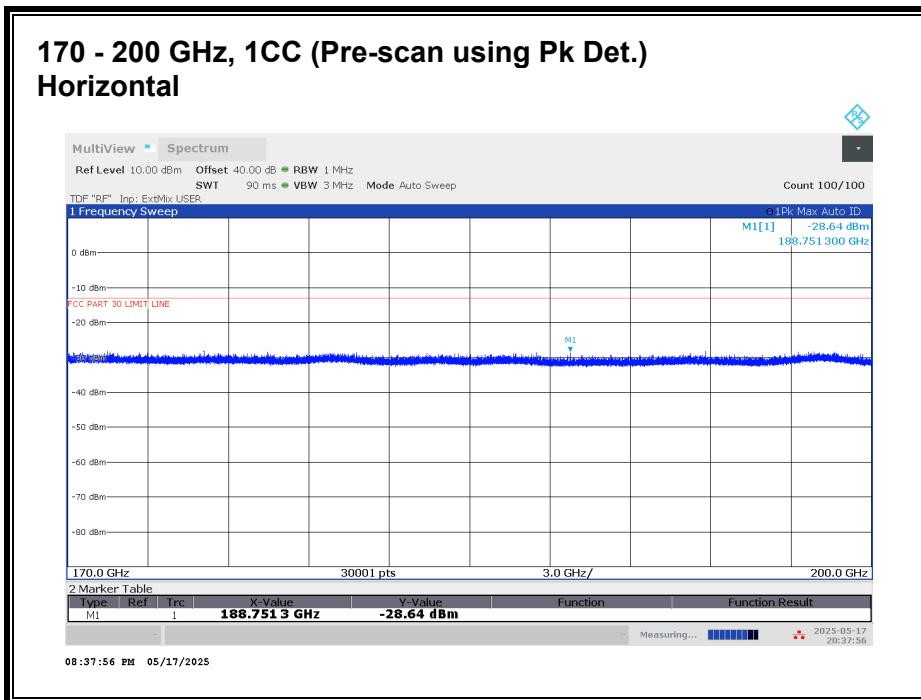

No emission detected using Peak Detection.

## 8.5. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055

### LIMIT

For reporting purposes only

### TEST PROCEDURES

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.5  
ANSI C63.26-2015 Section 5.6

#### **Test procedures for temperature variation:**

- a. Position the EUT in temperature/humidity chamber with power off.
- b. Set the chamber temperature to 50°C and stabilize the EUT for at least 30 minutes.
- c. Record maximum change in frequency within one minute after powering the EUT.
- d. Decrease chamber temperature at 10°C intervals from 50°C to -30°C. Record maximum change in frequency at each temperature.
- e. A period of at least 30 minutes is provided to allow stabilization of the equipment at each temperature level.

- Temp. = -30°C to +50°C

#### **Test procedures for voltage variation:**

- a. Position the EUT in temperature/humidity chamber with power off.
- b. Set the chamber temperature to 20°C.
- c. Record maximum frequency change within one minute after powering the EUT.
- d. The primary supply voltage is varied from 85% to 115% of the nominal value for hand-carried, battery-powered equipment. Primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

- Voltage = (85% - 115%)
- Nominal: 3.8 VDC; Low: 3.23 VDC; High: 4.37 VDC

The measurements were performed with the CW signal of center frequency of each frequency band.

### RESULTS

See the following pages.

Employee IDs: 27294 & 103479

Test Date: 06/10/2025

Test Location: Temperature Chamber C

### 8.5.1. FREQUENCY STABILITY n258 SB1

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	24.3550524	9.45
Nominal	40	24.3550500	7.08
Nominal	30	24.3550091	-33.80
<b>Nominal</b>	<b>20</b>	<b>24.3550429</b>	<b>Reference</b>
Nominal	10	24.3550260	-16.88
Nominal	0	24.3550256	-17.30
Nominal	-10	24.3550123	-30.56
Nominal	-20	24.3550243	-18.57
Nominal	-30	24.3550091	-33.83
115%	20	24.3550243	-18.57
85%	20	24.3550430	0.14

### 8.5.2. FREQUENCY STABILITY n258 SB2

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	25.0050224	1.08
Nominal	40	25.0050242	2.91
Nominal	30	25.0050272	5.83
<b>Nominal</b>	<b>20</b>	<b>25.0050213</b>	<b>Reference</b>
Nominal	10	25.0050088	-12.50
Nominal	0	25.0050074	-13.98
Nominal	-10	25.0049959	-25.42
Nominal	-20	25.0049978	-23.50
Nominal	-30	25.0049853	-36.03
115%	20	25.0050231	1.73
85%	20	25.0050176	-3.72

### 8.5.3. FREQUENCY STABILITY n261

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	27.9299696	10.37
Nominal	40	27.9299671	7.82
Nominal	30	27.9299702	10.94
<b>Nominal</b>	<b>20</b>	<b>27.9299593</b>	<b>Reference</b>
Nominal	10	27.9299464	-12.86
Nominal	0	27.9299480	-11.24
Nominal	-10	27.9299351	-24.22
Nominal	-20	27.9299300	-29.26
Nominal	-30	27.9299283	-30.94
115%	20	27.9299550	-4.25
85%	20	27.9299612	1.94

### 8.5.4. FREQUENCY STABILITY n260

Input Voltage	Environment	Frequency	Delta
	Temperature (°C)	(GHz)	(kHz)
Nominal	50	38.5049747	36.33
Nominal	40	38.5049696	31.23
Nominal	30	38.5049754	37.06
<b>Nominal</b>	<b>20</b>	<b>38.5049383</b>	<b>Reference</b>
Nominal	10	38.5049524	14.11
Nominal	0	38.5049476	9.23
Nominal	-10	38.5049273	-11.02
Nominal	-20	38.5049289	-9.46
Nominal	-30	38.5049595	21.14
115%	20	38.5049468	8.52
85%	20	38.5049325	-5.84

The occupied bandwidths (Section 8.1) are smaller than the channel bandwidths by at least 2.15 MHz (97.85 MHz from n261, 2CC, 50 MHz BW, SISO-Dual, QPSK, Low CH) for all modes of operation, therefore the signal is at least 1.075 MHz from either edge of the channel. As the channels are fully contained within the FCC-allocated bands, and the frequency stability is significantly less than 1.075 MHz, with a maximum frequency shift of 37.06 kHz over the test conditions (n260 at 30°C), the signal is always contained within the allocated channel and band.

## 9. SETUP PHOTOS

Please refer to 15496224-EP39V1 for setup photos.

**END OF REPORT**

## APPENDIX A

### 1. 50 - 75 GHz VDI WR15SAX-F

Serial No.: SAX 954

### 2. 75 - 110 GHz VDI WR10SAX-F

Serial No.: SAX 955

### 3. 110 - 170 GHz VDI WR6.5SAX-F

Serial No.: SAX 956

### 4. 170 - 260 GHz VDI WR4.3SAX-F

Serial No.: SAX 987

Docusign Envelope ID: 220920A2-8696-4628-BD78-124DD1F104B2



**Virginia Diodes, Inc**  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902  
Phone: 434-297-3257  
Fax: 434-297-3258

**Certificate of Conformance**

To: UL LLC  
47173 Benicia Street  
Fremont, CA 94538  
United States

From: Virginia Diodes, Inc  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902

Packing List No: 243720  
Shipping Date: 9/18/2024

Today's Date: 09/18/2024  
PO Number: 7862030966

<u>Quantity Shipped</u>	<u>Unit</u>	<u>Description</u>	<u>Order-Job Number</u>
1	EA	RETEST-WR15SAX-F - WR15SAX-F / SN: SAX 954	240422-01
1	EA	RETEST-WR10SAX-F - WR10SAX-F / SN: SAX 955	240422-02
1	EA	RETEST-WR6.5SAX-F - WR6.5SAX-F / SN: SAX 956	240422-03
1	EA	RETEST-WR4.3SAX-F - WR4.3SAX-F / SN: SAX 987	240422-04

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

Heather St. Amard


Authorized Signature  
Virginia Diodes, Inc

DD

## 5. 33 - 50 GHz CMI HO22R HORN ANTENNA




24 Boston Court  
Longmont, CO 80501  
303 651-0707 (P)  
303 651-0708 (F)  
[www.custommicrowave.com](http://www.custommicrowave.com)

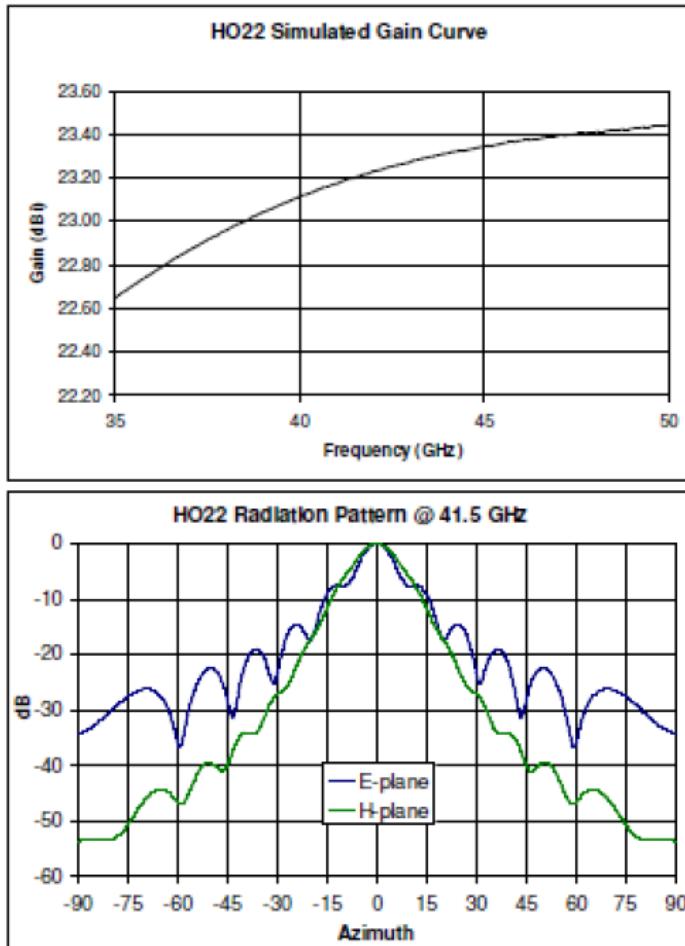

## 6. 50 - 75 GHz CMI HO15R HORN ANTENNA




24 Boston Court  
Longmont, CO 80501  
303 651-0707(P)  
303 651-0706(F)  
[www.custommicrowave.com](http://www.custommicrowave.com)

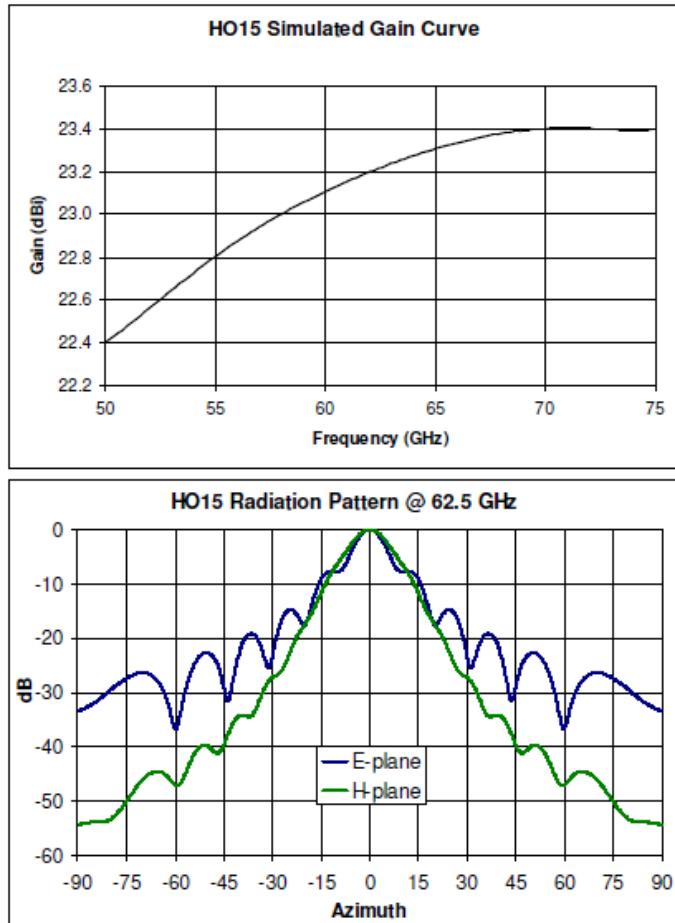

## 7. 75 - 110 GHz CMI HO10R HORN ANTENNA





24 Boston Court  
Longmont, CO 80501  
303 651-0707(P)  
303 651-0708(F)  
[www.custommicrowave.com](http://www.custommicrowave.com)

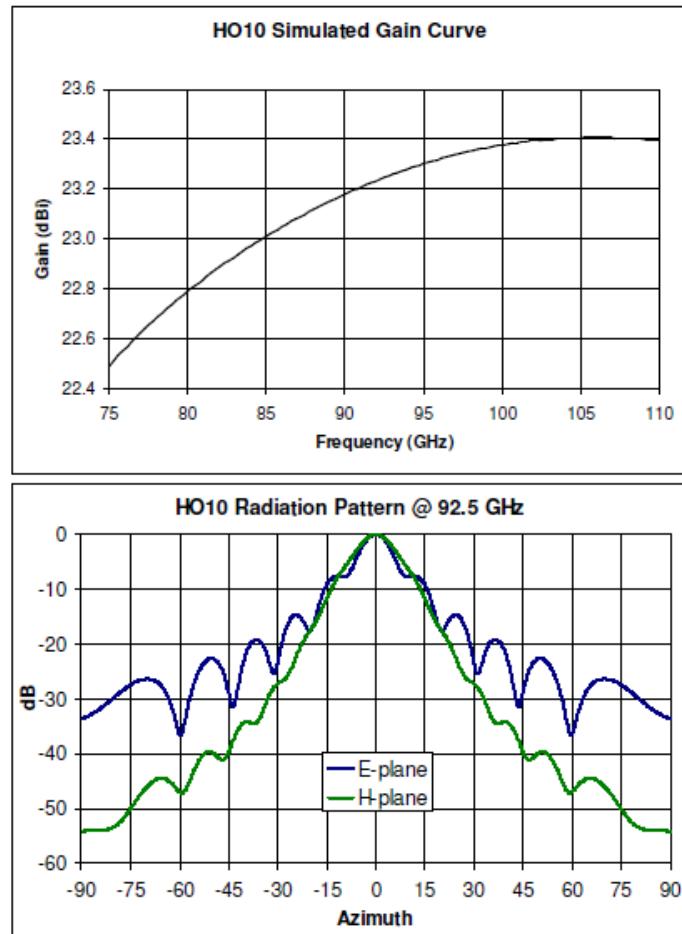

## 8. 110 - 170 GHz CMI HO6R HORN ANTENNA



24 Boston Court  
Longmont, CO 80501  
303 651-0707(P)  
303 651-0706(F)  
[www.custommicrowave.com](http://www.custommicrowave.com)

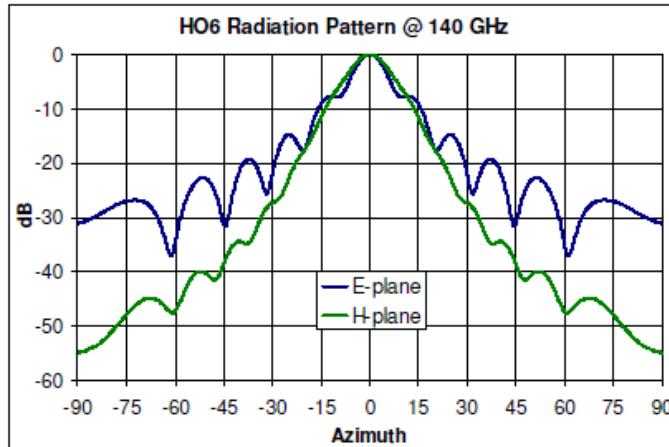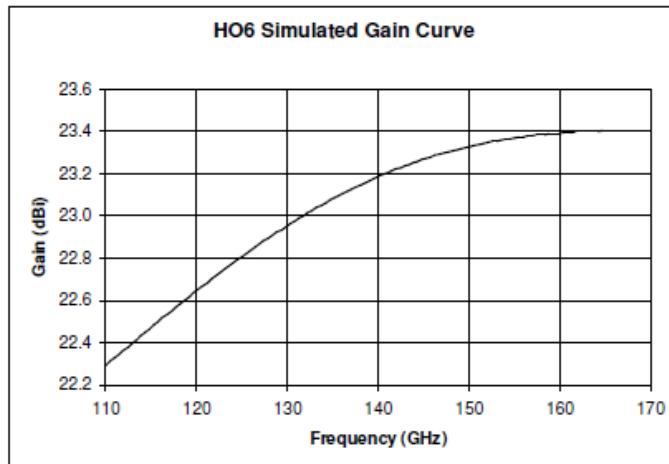

## 9. 170 - 260 GHz CMI HO4R HORN ANTENNA



24 Boston Court  
Longmont, CO 80501  
303 651-0707(P)  
303 651-0706(F)  
[www.custommicrowave.com](http://www.custommicrowave.com)

