

TEST REPORT

Report Number: 15496278-E10V2 & E11V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3519, A3520, A3521

Brand : APPLE

FCC ID : BCG-E8951A, BCG-E8952A, BCG-E8953A

IC : 579C-E8951A, 579C-E8952A, 579C-E8953A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2025/08/22

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2025/08/15	Initial Review	Everardo H. Torres
V2	2025/08/20	Addressed TCB Questions	Everardo H. Torres

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE	6
1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE	9
1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE	12
1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	15
1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE	19
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	22
1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	25
1.1.8. 802.11be MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	29
1.1.9. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE	35
1.1.10. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE	38
1.1.11. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE	41
1.1.12. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	44
1.1.13. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE	48
1.1.14. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	51
1.1.15. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	54
1.1.16. 802.11be MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	58
1.1.17. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGES	63
1.1.18. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGES	69
1.1.19. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGES	74
1.1.20. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES	80
1.1.21. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGES	88
1.1.22. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES	93
1.1.23. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	99
1.1.24. 802.11be MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	104
1.1.25. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGES	114
1.1.26. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGES	119
1.1.27. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGES	124
1.1.28. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGES	129
1.1.29. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGES	134
1.1.30. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGES	139
1.1.31. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	144
1.1.32. 802.11be MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	148
1.2. <i>WORST CASE BELOW 1 GHz</i>	153
1.3. <i>WORST CASE 18-26 GHz</i>	155
1.4. <i>WORST CASE 26-40 GHz</i>	157
2. AC POWERLINE CONDUCTED EMISSIONS	159
2.1. <i>AC POWER LINE WITH LAPTOP</i>	160
2.2. <i>AC POWER LINE WITH AC/DC ADAPTER</i>	162
3. SETUP PHOTOS	164

1. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands

FCC §15.407(b)(1-3) -Un-Restricted bands

RSS 247 Issue 3 Sections

6.2.1.2 (for 5150-5250 MHz band)

6.2.2.2 (for 5250-5350 MHz band)

6.2.3.2 (for 5470-5600 MHz and 5650-5725 MHz bands)

6.2.4.3 (for 5725-5850 MHz band)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz and 1.5 meters above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

In addition:

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and chamber chamber-measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference purposes only, showing different bandwidths and antenna configurations.

1.1. TRANSMITTER ABOVE 1 GHz

1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6	*5.15	62.88	PK	34.4	-35.3	0	61.98	-	-	74	-12.02	126	273	H
			*5.14814	66.19	PK	34.4	-35.2	0	65.39	-	-	74	-8.61	126	273	H
			*5.15	49.13	RMS	34.4	-35.3	0	48.23	54	-5.77	-	-	126	273	H
			*5.149279	49.82	RMS	34.4	-35.1	0	49.12	54	-4.88	-	-	126	273	H
			*5.15	65.8	PK	34.4	-35.3	0	64.9	-	-	74	-9.1	87	110	V
			*5.147529	68.28	PK	34.4	-35.1	0	67.58	-	-	74	-6.42	87	110	V
			*5.15	51.79	RMS	34.4	-35.3	0	50.89	54	-3.11	-	-	87	110	V
			*5.149168	51.89	RMS	34.4	-35.1	0	51.19	54	-2.81	-	-	87	110	V
		5	*5.15	68.08	Pk	34.4	-38.33	0	64.15	-	-	74	-9.85	145	101	H
			*5.147835	70.02	Pk	34.4	-38.34	0	66.08	-	-	74	-7.92	145	101	H
			*5.15	54.38	RMS	34.4	-38.33	0	50.45	54	-3.55	-	-	145	101	H
			*5.149335	55.16	RMS	34.4	-38.34	0	51.22	54	-2.78	-	-	145	101	H
			*5.15	65.61	Pk	34.4	-38.33	0	61.68	-	-	74	-12.32	121	165	V
			*5.14964	68.17	Pk	34.4	-38.33	0	64.24	-	-	74	-9.76	121	165	V
			*5.15	52.25	RMS	34.4	-38.33	0	48.32	54	-5.68	-	-	121	165	V
			*5.149946	53.2	RMS	34.4	-38.33	0	49.27	54	-4.73	-	-	121	165	V
HT40	5190	6	5.148946	51.03	RMS	34	-38.53	0	46.5	54	-7.5	-	-	302	114	H
			5.149862	69.71	Pk	34	-38.51	0	65.2	-	-	74	-8.8	302	114	H
			5.15	65.21	Pk	34	-38.51	0	60.7	-	-	74	-13.3	302	114	H
			5.15	50.5	RMS	34	-38.51	0	45.99	54	-8.01	-	-	302	114	H
			5.14514	73.65	Pk	34	-38.54	0	69.11	-	-	74	-4.89	292	107	V
			5.146946	54.86	RMS	34	-38.55	0	50.31	54	-3.69	-	-	292	107	V
			5.15	72.16	Pk	34	-38.51	0	67.65	-	-	74	-6.35	292	107	V
			5.15	53.21	RMS	34	-38.51	0	48.7	54	-5.3	-	-	292	107	V
		5	*5.15	69.51	Pk	34.4	-38.33	0	65.58	-	-	74	-8.42	329	127	H
			*5.149918	73.16	Pk	34.4	-38.33	0	69.23	-	-	74	-4.77	329	127	H
			*5.15	53.5	RMS	34.4	-38.33	0	49.57	54	-4.43	-	-	329	127	H
			*5.148668	54.53	RMS	34.4	-38.34	0	50.59	54	-3.41	-	-	329	127	H
			*5.15	68.16	Pk	34.4	-38.33	0	64.23	-	-	74	-9.77	310	194	V
			*5.144751	68.94	Pk	34.4	-38.36	0	64.98	-	-	74	-9.02	310	194	V
			*5.15	50.42	RMS	34.4	-38.33	0	46.49	54	-7.51	-	-	310	194	V
			*5.147223	51.08	RMS	34.4	-38.33	0	47.15	54	-6.85	-	-	310	194	V
VHT80	5210	6	5.149696	66.8	Pk	34.3	-36.69	0	64.41	-	-	74	-9.59	168	117	H
			5.149779	49.76	RMS	34.3	-36.69	0	47.37	54	-6.63	-	-	168	117	H
			5.15	65.75	Pk	34.3	-36.68	0	63.37	-	-	74	-10.63	168	117	H
			5.15	49.32	RMS	34.3	-36.68	0	46.94	54	-7.06	-	-	168	117	H
			5.147029	53.87	RMS	34.3	-36.77	0	51.4	54	-2.6	-	-	148	144	V
			5.14939	71.23	Pk	34.3	-36.7	0	68.83	-	-	74	-5.17	148	144	V
			5.15	70.69	Pk	34.3	-36.68	0	68.31	-	-	74	-5.69	148	144	V
			5.15	52.89	RMS	34.3	-36.68	0	50.51	54	-3.49	-	-	148	144	V
		5	5.149279	73.91	Pk	34.3	-39.29	0	68.92	-	-	74	-5.08	331	136	H
			5.149918	55.29	RMS	34.3	-39.25	0	50.34	54	-3.66	-	-	331	136	H
			5.15	73.07	Pk	34.3	-39.25	0	68.12	-	-	74	-5.88	331	136	H
			5.15	52.85	RMS	34.3	-39.25	0	47.9	54	-6.1	-	-	331	136	H
			5.14739	52.83	RMS	34.3	-39.29	0	47.84	54	-6.16	-	-	322	211	V
			5.149696	70.14	Pk	34.3	-39.27	0	65.17	-	-	74	-8.83	322	211	V
			5.15	69.65	Pk	34.3	-39.25	0	64.7	-	-	74	-9.3	322	211	V
			5.15	50.88	RMS	34.3	-39.25	0	45.93	54	-8.07	-	-	322	211	V
VHT160	5250 (Lower)	6	*5.15	45.35	Pk	34.5	-24.5	0	55.35	-	-	74	-18.65	215	105	H
			*5.122473	57.07	Pk	34.4	-24.3	0	67.17	-	-	74	-6.83	215	105	H
			*5.15	29.77	RMS	34.5	-24.5	0.11	39.88	54	-14.12	-	-	215	105	H
			*5.122557	38.24	RMS	34.4	-24.3	0.11	48.45	54	-5.55	-	-	215	105	H
			*5.15	47.1	Pk	34.5	-24.5	0	57.1	-	-	74	-16.9	355	103	V
			*5.122001	59.29	Pk	34.4	-24.3	0	69.39	-	-	74	-4.61	355	103	V
			*5.15	29.95	RMS	34.5	-24.5	0.11	40.06	54	-13.94	-	-	355	103	V
			*5.122584	39.53	RMS	34.4	-24.3	0.11	49.74	54	-4.26	-	-	355	103	V
		5	*5.15	49.72	Pk	34.5	-24.5	0	59.72	-	-	74	-14.28	269	158	H
			*5.122223	58.59	Pk	34.4	-24.3	0	68.69	-	-	74	-5.31	269	158	H
			*5.15	33.01	RMS	34.5	-24.5	0.11	43.12	54	-10.88	-	-	269	158	H
			*5.123334	37.62	RMS	34.4	-24.3	0.11	47.83	54	-6.17	-	-	269	158	H
			*5.15	47.32	Pk	34.5	-24.5	0	57.32	-	-	74	-16.68	241	193	V
			*5.121973	56.45	Pk	34.4	-24.3	0	66.55	-	-	74	-7.45	241	193	V
			*5.15	31.75	RMS	34.5	-24.5	0.11	41.86	54	-12.14	-	-	241	193	V
			*5.119445	35.93	RMS	34.4	-24.3	0.11	46.14	54	-7.86	-	-	241	193	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz)

HORIZONTAL RESULT

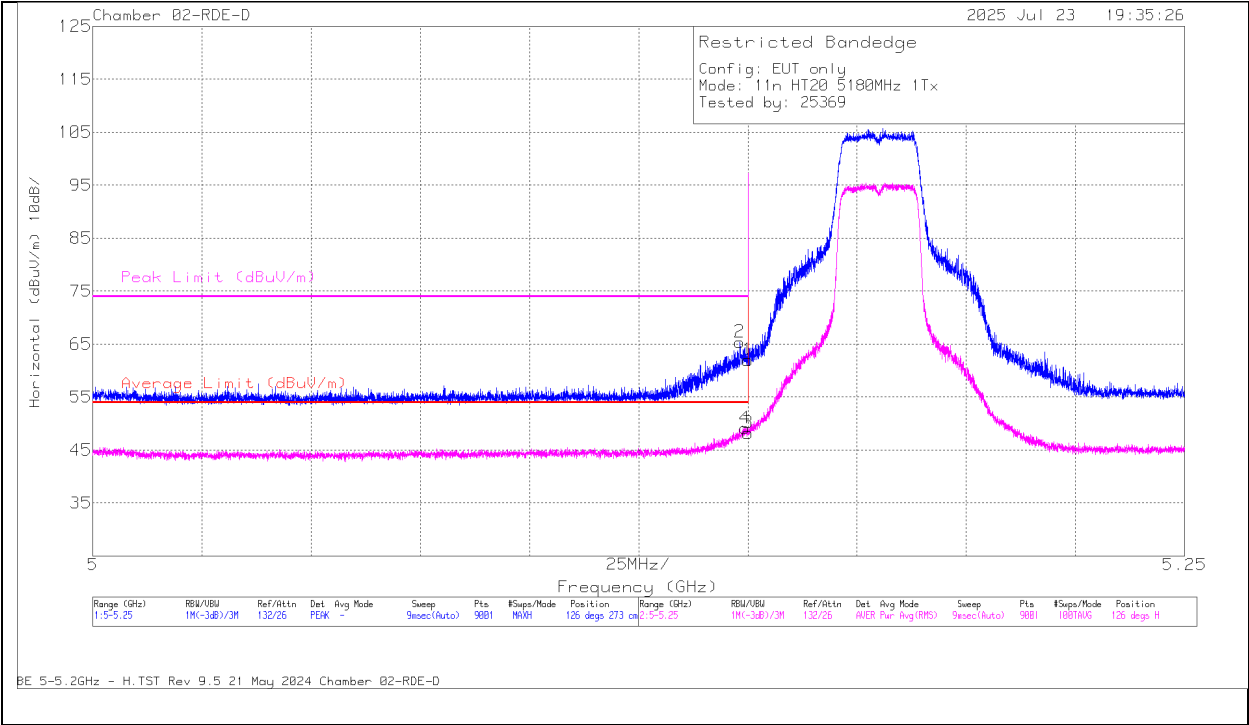


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.15	62.68	PK	34.4	0	-35.3	61.98	-	-	74	-12.02	126	273	H
2	*5.14814	66.19	PK	34.4	0	-35.2	65.39	-	-	74	-8.61	126	273	H
3	*5.15	49.13	RMS	34.4	0	-35.3	48.23	54	-5.77	-	-	126	273	H
4	*5.149279	49.82	RMS	34.4	0	-35.1	49.12	54	-4.88	-	-	126	273	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz)

VERTICAL RESULT

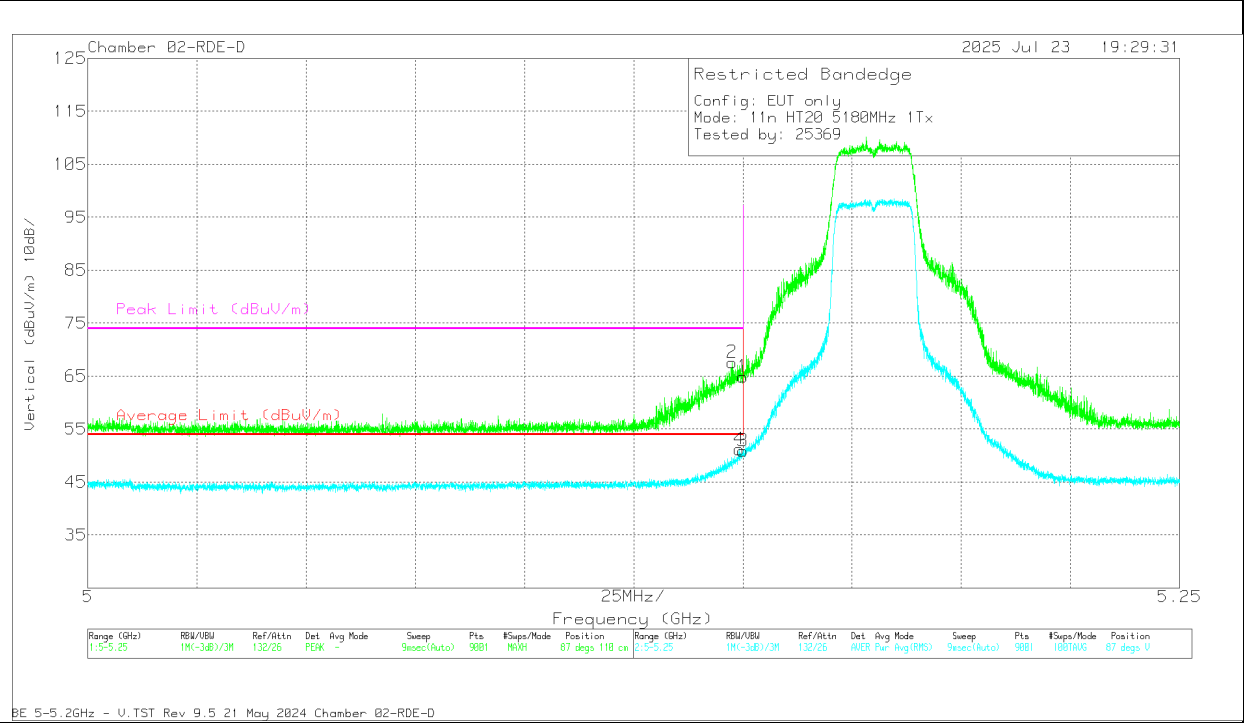

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.15	65.8	PK	34.4	0	-35.3	64.9	-	-	74	-9.1	87	110	V
2	*5.147529	68.28	PK	34.4	0	-35.1	67.68	-	-	74	-6.42	87	110	V
3	*5.15	51.79	RMS	34.4	0	-35.3	50.89	54	-3.11	-	-	87	110	V
4	*5.149168	51.89	RMS	34.4	0	-35.1	51.19	54	-2.81	-	-	87	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection


1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6 + 5	* 5.15	68.24	PK	34.4	-38.33	0	64.31	-	-	74	-9.69	328	300	H
			* 5.149918	69.18	PK	34.4	-38.33	0	65.25	-	-	74	-8.75	328	300	H
			* 5.15	52.59	RMS	34.4	-38.33	0	48.66	54	-5.34	-	-	328	300	H
			* 5.149668	53.78	RMS	34.4	-38.33	0	49.85	54	-4.15	-	-	328	300	H
			* 5.15	71.68	PK	34.4	-38.33	0	67.75	-	-	74	-6.25	226	260	V
			* 5.149696	71.17	PK	34.4	-38.33	0	67.24	-	-	74	-6.76	226	260	V
			* 5.15	53.36	RMS	34.4	-38.33	0	49.43	54	-4.57	-	-	226	260	V
			* 5.149723	55.32	RMS	34.4	-38.33	0	51.39	54	-2.61	-	-	226	260	V
HT40	5190	6 + 5	5.147362	52.32	RMS	34	-38.58	0	47.74	54	-6.26	-	-	36	180	H
			5.147446	69.87	Pk	34	-38.58	0	65.29	-	-	74	-8.71	36	180	H
			5.15	63.82	Pk	34	-38.51	0	59.31	-	-	74	-14.69	36	180	H
			5.15	50.64	RMS	34	-38.51	0	46.13	54	-7.87	-	-	36	180	H
			5.147251	73.16	Pk	34	-38.57	0	68.59	-	-	74	-5.41	353	304	V
			5.147446	55.32	RMS	34	-38.58	0	50.74	54	-3.26	-	-	353	304	V
			5.15	67.42	Pk	34	-38.51	0	62.91	-	-	74	-11.09	353	304	V
			5.15	51.49	RMS	34	-38.51	0	46.98	54	-7.02	-	-	353	304	V
VHT80	5210	6 + 5	* 5.15	70.07	PK	34.1	-40	0	64.17	-	-	74	-9.83	269	116	H
			* 5.149946	70.68	PK	34.1	-40	0	64.78	-	-	74	-9.22	269	116	H
			* 5.15	50.3	RMS	34.1	-40	0	44.4	54	-9.6	-	-	269	116	H
			* 5.14814	52.39	RMS	34.1	-40.09	0	46.4	54	-7.6	-	-	269	116	H
			* 5.15	75	PK	34.1	-40	0	69.1	-	-	74	-4.9	155	281	V
			* 5.149807	75.11	PK	34.1	-40	0	69.21	-	-	74	-4.79	155	281	V
			* 5.15	54.52	RMS	34.1	-40	0	48.62	54	-5.38	-	-	155	281	V
			* 5.14964	56.4	RMS	34.1	-40	0	50.5	54	-3.5	-	-	155	281	V
VHT160	5250 (Lower)	6 + 5	* 5.15	40.38	PK	34.1	-17.8	0	56.68	-	-	74	-17.32	133	166	H
			* 5.122922	52.37	PK	34.1	-17.8	0	68.67	-	-	74	-5.33	133	166	H
			* 5.15	29.46	RMS	34.1	-17.8	0.11	45.87	54	-8.13	-	-	133	166	H
			* 5.12859	32.98	RMS	34.1	-17.8	0.11	49.39	54	-4.61	-	-	133	166	H
			* 5.15	39.74	PK	34.1	-17.8	0	56.04	-	-	74	-17.96	108	174	V
			* 5.118328	47.24	PK	34.1	-17.8	0	63.54	-	-	74	-10.46	108	174	V
			* 5.15	28.59	RMS	34.1	-17.8	0.11	45	54	-9	-	-	108	174	V
			* 5.008157	29.67	RMS	34	-17.3	0.11	46.48	54	-7.52	-	-	108	174	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

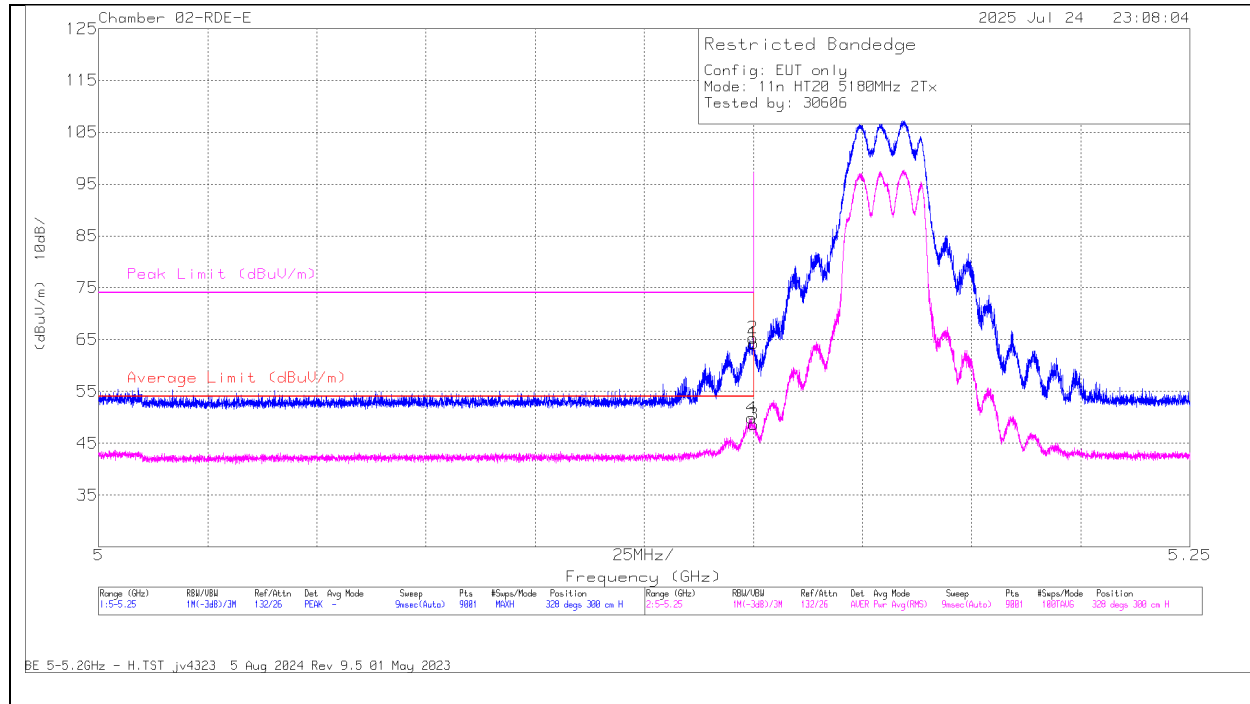BANDEDGE (LOW CHANNEL / 5180MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	68.24	PK	34.4	0	-38.33	64.31	-	-	74	-9.69	328	300	H
2	* 5.149918	69.18	PK	34.4	0	-38.33	65.25	-	-	74	-8.75	328	300	H
3	* 5.15	52.59	RMS	34.4	0	-38.33	48.66	54	-5.34	-	-	328	300	H
4	* 5.149668	53.78	RMS	34.4	0	-38.33	49.85	54	-4.15	-	-	328	300	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz)

VERTICAL RESULT

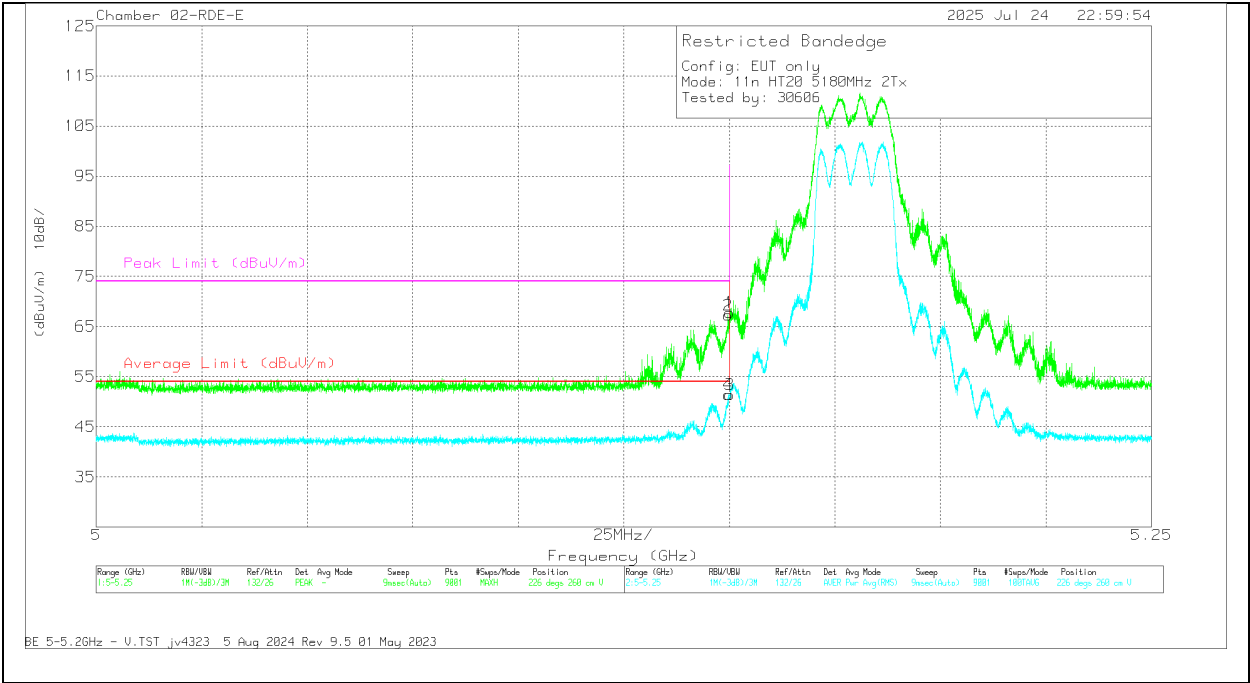

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	71.68	PK	34.4	0	-38.33	67.75	-	-	74	-6.25	226	260	V
2	* 5.149696	71.17	PK	34.4	0	-38.33	67.24	-	-	74	-6.76	226	260	V
3	* 5.15	53.36	RMS	34.4	0	-38.33	49.43	54	-4.57	-	-	226	260	V
4	* 5.149723	55.32	RMS	34.4	0	-38.33	51.39	54	-2.61	-	-	226	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection


1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5180	6	* 5.15	62.29	Pk	34	-35.43	0	60.86	-	-	74	-13.14	34	195	H
			* 5.147168	65.57	Pk	34	-35.45	0	64.12	-	-	74	-9.88	34	195	H
			* 5.15	48.92	RMS	34	-35.43	0	47.49	54	-6.51	-	-	34	195	H
			* 5.149362	49.33	RMS	34	-35.44	0	47.89	54	-6.11	-	-	34	195	H
			* 5.15	68.54	Pk	34	-35.43	0	67.11	-	-	74	-6.89	338	135	V
			* 5.149668	70.03	Pk	34	-35.43	0	68.6	-	-	74	-5.4	338	135	V
		5	* 5.15	52.71	RMS	34	-35.43	0	51.28	54	-2.72	-	-	338	135	V
			* 5.149418	52.65	RMS	34	-35.44	0	51.21	54	-2.79	-	-	338	135	V
			* 5.150	61.05	Pk	34.4	-30.7	0	64.75	-	-	74	-9.25	154	138	H
			* 5.147988	63.3	Pk	34.4	-30.7	0	67	-	-	74	-7	154	138	H
			* 5.150	45.1	RMS	34.4	-30.7	0	48.8	54	-5.2	-	-	154	138	H
			* 5.149644	46.63	RMS	34.4	-30.7	0	50.33	54	-3.67	-	-	154	138	H
			* 5.150	58.33	Pk	34.4	-30.7	0	62.03	-	-	74	-11.97	105	106	V
			* 5.148925	58.95	Pk	34.4	-30.7	0	62.65	-	-	74	-11.35	105	106	V
			* 5.150	43.57	RMS	34.4	-30.7	0	47.27	54	-6.73	-	-	105	106	V
			* 5.1498	44.35	RMS	34.4	-30.7	0	48.05	54	-5.95	-	-	105	106	V
EHT40 (SU Mode)	5190	6	* 5.15	47.09	Pk	34.1	-17.8	0	63.39	-	-	74	-10.61	255	186	H
			* 5.147519	53.15	Pk	34.1	-17.8	0	69.45	-	-	74	-4.55	255	186	H
			* 5.15	30.9	RMS	34.1	-17.8	0	47.2	54	-6.8	-	-	255	186	H
			* 5.149707	31.59	RMS	34.1	-17.8	0	47.89	54	-6.11	-	-	255	186	H
			* 5.15	39.72	Pk	34.1	-17.8	0	56.02	-	-	74	-17.98	251	163	V
			* 5.149175	44.58	Pk	34.1	-17.8	0	60.88	-	-	74	-13.12	251	163	V
		5	* 5.15	28.56	RMS	34.1	-17.8	0	44.86	54	-9.14	-	-	251	163	V
			* 5.002407	29.37	RMS	34	-17.3	0	46.07	54	-7.93	-	-	251	163	V
			* 5.15	46.8	Pk	34.1	-17.8	0	63.1	-	-	74	-10.9	230	122	H
			* 5.149644	53.05	Pk	34.1	-17.8	0	69.35	-	-	74	-4.65	230	122	H
			* 5.15	31.06	RMS	34.1	-17.8	0	47.36	54	-6.64	-	-	230	122	H
			* 5.149519	32.39	RMS	34.1	-17.8	0	48.69	54	-5.31	-	-	230	122	H
		5	* 5.15	44.41	Pk	34.1	-17.8	0	60.71	-	-	74	-13.29	187	110	V
			* 5.149894	50.86	Pk	34.1	-17.8	0	67.16	-	-	74	-6.84	187	110	V
			* 5.15	29.96	RMS	34.1	-17.8	0	46.26	54	-7.74	-	-	187	110	V
			* 5.148988	30.84	RMS	34.1	-17.8	0	47.14	54	-6.86	-	-	187	110	V
EHT80 (SU Mode)	5210	6	* 5.15	59.9	Pk	34.5	-35.4	0	59	-	-	74	-15	97	218	H
			* 5.146144	63.28	Pk	34.4	-35.4	0	62.28	-	-	74	-11.72	97	218	H
			* 5.15	44.3	RMS	34.5	-35.4	0	43.4	54	-10.6	-	-	97	218	H
			* 5.146237	45.4	RMS	34.4	-35.4	0	44.4	54	-9.6	-	-	97	218	H
			* 5.15	67.12	Pk	34.5	-35.4	0	68.22	-	-	74	-7.78	85	252	V
			* 5.145862	69.6	Pk	34.4	-35.4	0	68.6	-	-	74	-5.4	85	252	V
		5	* 5.15	48.88	RMS	34.5	-35.4	0	47.98	54	-6.02	-	-	85	252	V
			* 5.147488	50.13	RMS	34.4	-35.4	0	49.13	54	-4.87	-	-	85	252	V
			* 5.150	62.81	Pk	34.4	-30.7	0	66.51	-	-	74	-7.49	149	115	H
			* 5.145331	64.61	Pk	34.4	-30.7	0	68.31	-	-	74	-5.69	149	115	H
			* 5.150	44.21	RMS	34.4	-30.7	0	47.91	54	-6.09	-	-	149	115	H
			* 5.14755	46.91	RMS	34.4	-30.7	0	50.61	54	-3.39	-	-	149	115	H
		5	* 5.150	59.3	Pk	34.4	-30.7	0	63	-	-	74	-11	85	182	V
			* 5.145144	62.33	Pk	34.4	-30.7	0	66.03	-	-	74	-7.97	85	182	V
			* 5.150	42.78	RMS	34.4	-30.7	0	46.48	54	-7.52	-	-	85	182	V
			* 5.149175	44.6	RMS	34.4	-30.7	0	48.3	54	-5.7	-	-	85	182	V
EHT160 (SU Mode)	5250 (Lower)	6	* 5.15	63.31	Pk	34.4	-38.33	0	59.38	-	-	74	-14.62	180	169	H
			* 5.115501	72.81	Pk	34.4	-38.39	0	68.82	-	-	74	-5.18	180	169	H
			* 5.15	49.46	RMS	34.4	-38.33	0.14	45.67	54	-8.33	-	-	180	169	H
			* 5.116056	53.32	RMS	34.4	-38.4	0.14	49.46	54	-4.54	-	-	180	169	H
			* 5.15	60.3	Pk	34.4	-38.33	0	56.37	-	-	74	-17.63	178	187	V
			* 5.114973	67.2	Pk	34.4	-38.37	0	63.23	-	-	74	-10.77	178	187	V
		5	* 5.15	47.25	RMS	34.4	-38.33	0.14	43.46	54	-10.54	-	-	178	187	V
			* 5.121334	48.73	RMS	34.4	-38.33	0.14	44.94	54	-9.06	-	-	178	187	V
			* 5.15	54.61	Pk	34.5	-24.5	0	64.61	-	-	74	-9.39	185	103	H
			* 5.145668	58.26	Pk	34.4	-24.4	0	68.26	-	-	74	-5.74	185	103	H
			* 5.15	38.43	RMS	34.5	-24.5	0.14	48.57	54	-5.43	-	-	185	103	H
			* 5.128751	41.01	RMS	34.4	-24.2	0.14	51.35	54	-2.65	-	-	185	103	H
			* 5.15	52.59	Pk	34.5	-24.5	0	62.59	-	-	74	-11.41	181	149	V
			* 5.147362	55.6	Pk	34.4	-24.4	0	65.6	-	-	74	-8.4	181	149	V
			* 5.15	36.44	RMS	34.5	-24.5	0.14	46.58	54	-7.42	-	-	181	149	V
			* 5.129307	38.38	RMS	34.4	-24.2	0.14	48.72	54	-5.28	-	-	181	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

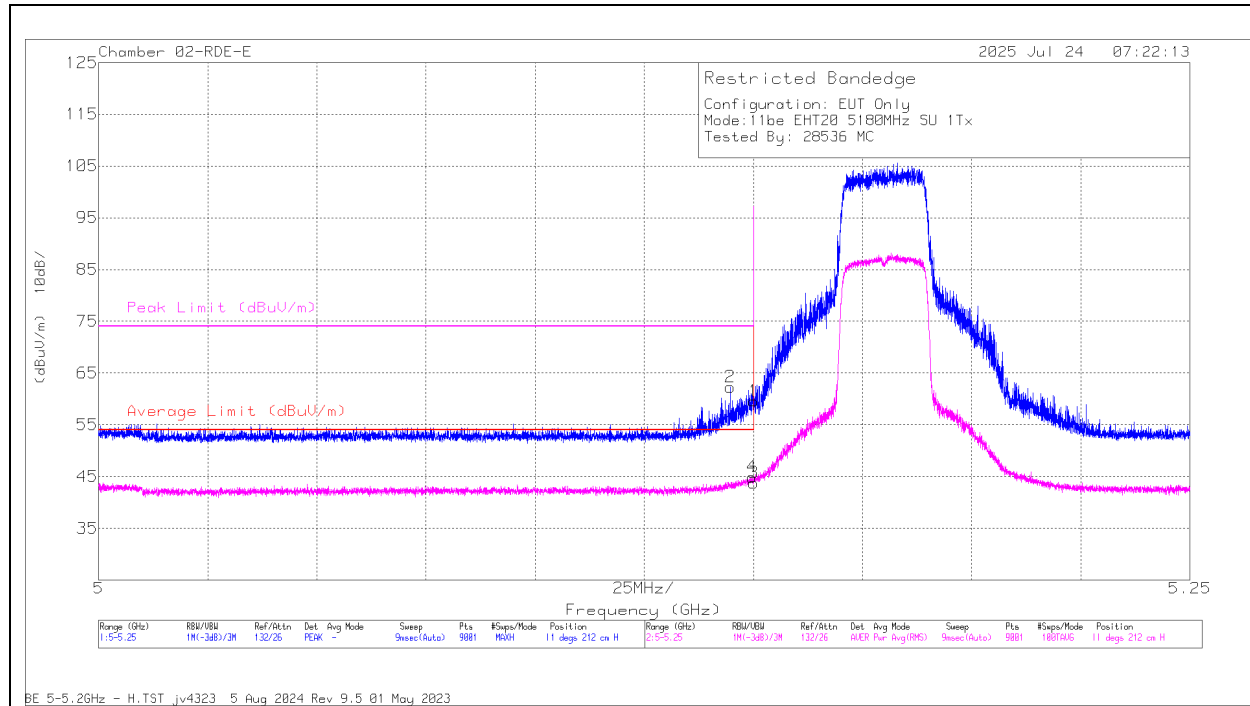
BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	62.29	Pk	34	-35.43	0	60.86	-	-	74	-13.14	34	195	H
2	* 5.147168	65.57	Pk	34	-35.45	0	64.12	-	-	74	-9.88	34	195	H
3	* 5.15	48.92	RMS	34	-35.43	0	47.49	54	-6.51	-	-	34	195	H
4	* 5.149362	49.33	RMS	34	-35.44	0	47.89	54	-6.11	-	-	34	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

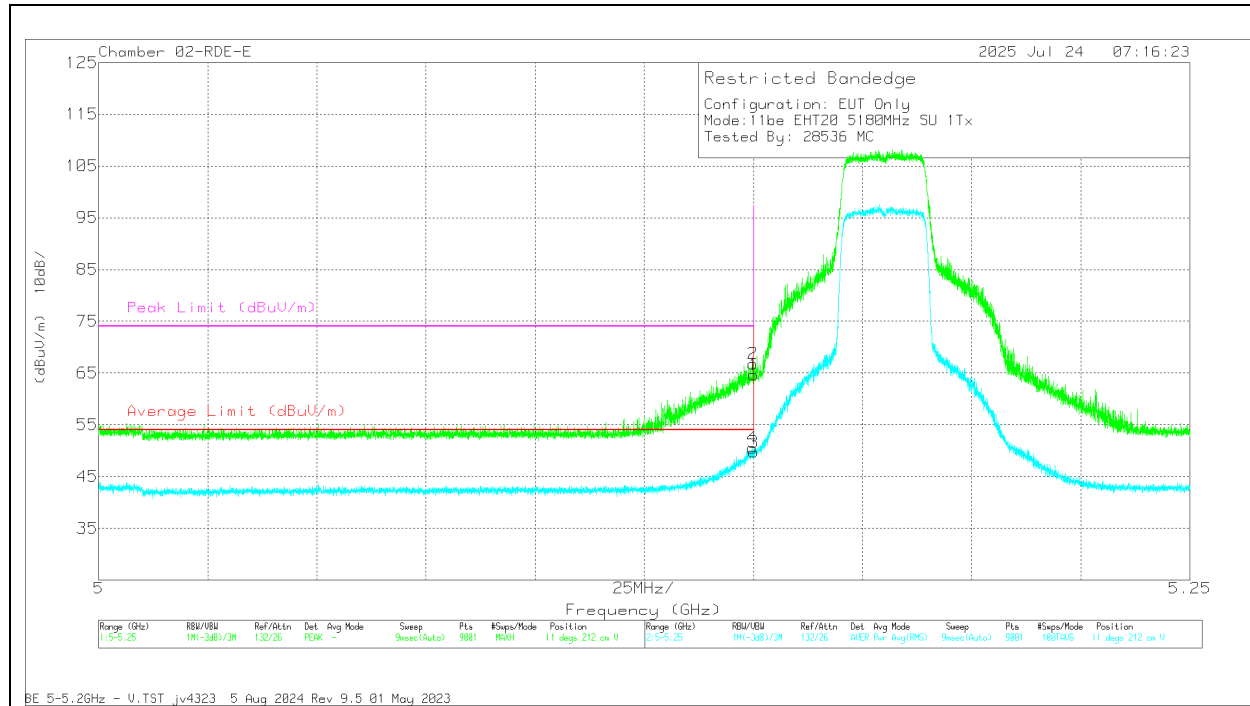BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	68.54	Pk	34	-35.43	0	67.11	-	-	74	-6.89	338	135	V
2	* 5.149668	70.03	Pk	34	-35.43	0	68.6	-	-	74	-5.4	338	135	V
3	* 5.15	52.71	RMS	34	-35.43	0	51.28	54	-2.72	-	-	338	135	V
4	* 5.149418	52.65	RMS	34	-35.44	0	51.21	54	-2.79	-	-	338	135	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5180	6	* 5.15	58.61	Pk	34.2	-38.4	0	54.41	-	-	74	-19.59	123	111	H
			* 5.148501	62.45	Pk	34.2	-38.45	0	58.2	-	-	74	-15.8	123	111	H
			* 5.15	47.05	RMS	34.2	-38.4	0	42.85	54	-11.15	-	-	123	111	H
			* 5.009139	48.04	RMS	34	-38.6	0	43.44	54	-10.56	-	-	123	111	H
			* 5.15	64.64	Pk	34.2	-38.4	0	60.44	-	-	74	-13.56	99	107	V
			* 5.148557	65.78	Pk	34.2	-38.44	0	61.54	-	-	74	-12.46	99	107	V
		5	* 5.15	47.11	RMS	34.2	-38.4	0	42.91	54	-11.09	-	-	99	107	V
			* 5.148029	48.49	RMS	34.2	-38.5	0	44.19	54	-9.81	-	-	99	107	V
			5.072362	59.74	Pk	34.2	-38.53	0	55.41	-	-	74	-18.59	344	365	H
			5.148918	48.09	RMS	34.3	-38.32	0	44.07	54	-9.93	-	-	344	365	H
			5.15	56.98	Pk	34.3	-38.27	0	53.01	-	-	74	-20.99	344	365	H
			5.15	47.3	RMS	34.3	-38.27	0	43.33	54	-10.67	-	-	344	365	H
			5.124418	61.66	Pk	34.2	-38.26	0	57.6	-	-	74	-16.4	130	382	V
			5.147696	47.88	RMS	34.3	-38.36	0	43.82	54	-10.18	-	-	130	382	V
			5.15	59.32	Pk	34.3	-38.27	0	55.35	-	-	74	-18.65	130	382	V
			5.15	46.34	RMS	34.3	-38.27	0	42.37	54	-11.63	-	-	130	382	V
EHT40 (242T / Index 61)	5190	6	* 5.15	55.59	Pk	34.4	-24.21	0	65.78	-	-	74	-8.22	347	222	H
			* 5.149862	57.92	Pk	34.4	-24.21	0	68.11	-	-	74	-5.89	347	222	H
			5.15	40.5	RMS	34.4	-24.21	0	50.69	54	-3.31	-	-	347	222	H
			5.148779	41.03	RMS	34.4	-24.19	0	51.24	54	-2.76	-	-	347	222	H
			5.15	47.71	Pk	34.4	-24.21	0	57.9	-	-	74	-16.1	340	100	V
			5.149585	48.7	Pk	34.4	-24.2	0	58.9	-	-	74	-15.1	340	100	V
		5	5.15	33.41	RMS	34.4	-24.21	0	43.6	54	-10.4	-	-	340	100	V
			5.149751	34.49	RMS	34.4	-24.21	0	44.68	54	-9.32	-	-	340	100	V
			5.148501	67.61	Pk	34.3	-38.33	0	63.58	-	-	74	-10.42	95	230	H
			5.149918	51.17	RMS	34.3	-38.27	0	47.2	54	-6.8	-	-	95	230	H
			5.15	66.21	Pk	34.3	-38.27	0	62.24	-	-	74	-11.76	95	230	H
			5.15	50.91	RMS	34.3	-38.27	0	46.94	54	-7.06	-	-	95	230	H
			5.149696	63.25	Pk	34.3	-38.29	0	59.26	-	-	74	-14.74	51	320	V
			5.149779	49.14	RMS	34.3	-38.28	0	45.16	54	-8.84	-	-	51	320	V
			5.15	61.13	Pk	34.3	-38.27	0	57.16	-	-	74	-16.84	51	320	V
			5.15	48.27	RMS	34.3	-38.27	0	44.3	54	-9.7	-	-	51	320	V
EHT40 (52T / Index 37)	5190	6	* 5.150	50.4	Pk	34.4	-24.21	0	60.59	-	-	74	-13.41	347	222	H
			* 5.14989	50.15	Pk	34.4	-24.21	0	60.34	-	-	74	-13.66	347	222	H
			* 5.150	32.13	RMS	34.4	-24.21	0.17	42.49	54	-11.51	-	-	347	222	H
			* 5.005306	34.69	RMS	34.3	-24.49	0.17	44.67	54	-9.33	-	-	347	222	H
			* 5.150	42.68	Pk	34.4	-24.21	0	52.87	-	-	74	-21.13	340	101	V
			* 5.003639	46.51	Pk	34.3	-24.44	0	56.37	-	-	74	-17.63	340	101	V
		5	* 5.150	31.77	RMS	34.4	-24.21	0.17	42.13	54	-11.87	-	-	340	101	V
			* 5.005667	34.61	RMS	34.3	-24.45	0.17	44.63	54	-9.37	-	-	340	101	V
			5.112695	60.09	Pk	34.2	-38.61	0	55.68	-	-	74	-18.32	221	138	H
			5.146307	47.81	RMS	34.3	-38.4	0.17	43.88	54	-10.12	-	-	221	138	H
			5.15	58.21	Pk	34.3	-38.27	0	54.24	-	-	74	-19.76	221	138	H
			5.15	46.52	RMS	34.3	-38.27	0.17	42.72	54	-11.28	-	-	221	138	H
			5.12389	47.95	RMS	34.2	-38.26	0.17	44.06	54	-9.94	-	-	150	276	V
			5.125112	60.44	Pk	34.2	-38.26	0	56.38	-	-	74	-17.62	150	276	V
			5.15	58.24	Pk	34.3	-38.27	0	54.27	-	-	74	-19.73	150	276	V
			5.15	46.45	RMS	34.3	-38.27	0.17	42.65	54	-11.35	-	-	150	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT 80 (242T / Index 61)	5210	6	* 5.15	64.22	Pk	34.5	-35.4	0	59.72	-	-	74	-14.28	97	218	H
			* 5.149519	66.33	Pk	34.5	-35.4	0	61.91	-	-	74	-12.09	97	218	H
			* 5.15	50.4	RMS	34.5	-35.4	0	49.5	54	-4.5	-	-	97	218	H
			* 5.149707	50.68	RMS	34.5	-35.4	0	49.78	54	-4.22	-	-	97	218	H
			* 5.15	67.13	Pk	34.5	-35.4	0	66.23	-	-	74	-7.77	85	252	V
			* 5.149457	69.35	Pk	34.5	-35.4	0	68.45	-	-	74	-5.55	85	252	V
		5	* 5.15	51.19	RMS	34.5	-35.4	0	50.29	54	-3.71	-	-	85	252	V
			* 5.14955	51.72	RMS	34.5	-35.4	0	50.82	54	-3.18	-	-	85	252	V
			* 5.150	61.93	Pk	34.3	-36.52	0	59.71	-	-	74	-14.29	40	398	H
			* 5.147723	63.68	Pk	34.3	-36.6	0	61.38	-	-	74	-12.62	40	398	H
			* 5.150	47.49	RMS	34.3	-36.52	0	45.27	54	-8.73	-	-	40	398	H
			* 5.149585	48.2	RMS	34.3	-36.47	0	46.03	54	-7.97	-	-	40	398	H
			* 5.150	61.09	Pk	34.3	-36.52	0	58.87	-	-	74	-15.13	25	216	V
			* 5.148668	63.74	Pk	34.3	-36.47	0	61.57	-	-	74	-12.43	25	216	V
			* 5.150	47.28	RMS	34.3	-36.52	0	45.06	54	-8.94	-	-	25	216	V
			* 5.149862	48.36	RMS	34.3	-36.5	0	46.16	54	-7.84	-	-	25	216	V
EHT 80 (52T / Index 37)	5210	6	* 5.15	58.88	Pk	34.5	-35.4	0	57.98	-	-	74	-16.02	97	218	H
			* 5.149988	58.94	Pk	34.5	-35.4	0	58.04	-	-	74	-15.96	97	218	H
			* 5.15	40.93	RMS	34.5	-35.4	0.16	40.19	54	-13.81	-	-	97	218	H
			* 5.1097606	42.63	RMS	34.4	-35.5	0.16	41.69	54	-12.31	-	-	97	218	H
			* 5.15	64.62	Pk	34.5	-35.4	0	63.72	-	-	74	-10.28	85	252	V
			* 5.1498	65.05	Pk	34.5	-35.4	0	64.15	-	-	74	-9.85	85	252	V
		5	* 5.15	41.87	RMS	34.5	-35.4	0.16	41.13	54	-12.87	-	-	85	252	V
			* 5.149332	45.31	RMS	34.5	-35.4	0.16	44.57	54	-9.43	-	-	85	252	V
			* 5.150	62.76	Pk	34.3	-36.52	0	60.54	-	-	74	-13.46	38	178	H
			* 5.149973	62.73	Pk	34.3	-36.52	0	60.51	-	-	74	-13.49	38	178	H
			* 5.150	45.72	RMS	34.3	-36.52	0.16	43.66	54	-10.34	-	-	38	178	H
			* 5.104723	46.33	RMS	34.4	-36.64	0.16	44.25	54	-9.75	-	-	38	178	H
			* 5.150	60.11	Pk	34.3	-36.52	0	57.89	-	-	74	-16.11	5	397	V
			* 5.147057	62.2	Pk	34.3	-36.6	0	59.9	-	-	74	-14.1	5	397	V
			* 5.150	45.65	RMS	34.3	-36.52	0.16	43.59	54	-10.41	-	-	5	397	V
			* 5.008945	47.1	RMS	34.3	-36.87	0.16	44.69	54	-9.31	-	-	5	397	V
EHT160 (242T / Index 61)	5250 (Lower)	6	* 5.15	47.03	Pk	34.4	-24.21	0	57.22	-	-	74	-16.78	154	119	H
			* 5.149529	49.51	Pk	34.4	-24.2	0	59.71	-	-	74	-14.29	154	119	H
			* 5.15	34.14	RMS	34.4	-24.21	0.1	44.43	54	-9.57	-	-	154	119	H
			* 5.149862	34.94	RMS	34.4	-24.21	0.1	45.23	54	-8.77	-	-	154	119	H
			* 5.15	56.42	Pk	34.4	-24.21	0	66.61	-	-	74	-7.39	227	254	V
			* 5.149029	57.82	Pk	34.4	-24.19	0	68.03	-	-	74	-5.97	227	254	V
		5	* 5.15	40.45	RMS	34.4	-24.21	0.1	50.74	54	-3.26	-	-	227	254	V
			* 5.149946	40.83	RMS	34.4	-24.21	0.1	51.12	54	-2.88	-	-	227	254	V
			* 5.150	56.1	Pk	34.3	-36.52	0	53.88	-	-	74	-20.12	80	303	H
			* 5.103473	58.51	Pk	34.4	-36.68	0	56.23	-	-	74	-17.77	80	303	H
			* 5.150	44.81	RMS	34.3	-36.52	0.1	42.69	54	-11.31	-	-	80	303	H
			* 5.003139	46.91	RMS	34.4	-36.92	0.1	44.49	54	-9.51	-	-	80	303	H
			* 5.150	55.36	Pk	34.3	-36.52	0	53.14	-	-	74	-20.86	298	208	V
			* 5.049862	58.45	Pk	34.3	-36.53	0	56.22	-	-	74	-17.78	298	208	V
			* 5.150	44.98	RMS	34.3	-36.52	0.1	42.86	54	-11.14	-	-	298	208	V
			* 5.102251	46.42	RMS	34.4	-36.7	0.1	44.22	54	-9.78	-	-	298	208	V
EHT160 (52T / Index 37)	5250 (Lower)	6	* 5.15	46.31	Pk	34.4	-24.21	0	56.5	-	-	74	-17.5	218	271	H
			* 5.149807	46.6	Pk	34.4	-24.21	0	56.79	-	-	74	-17.21	218	271	H
			* 5.15	32.08	RMS	34.4	-24.21	0.2	42.47	54	-11.53	-	-	218	271	H
			* 5.005806	34.68	RMS	34.3	-24.43	0.2	44.75	54	-9.25	-	-	218	271	H
			* 5.15	53.51	Pk	34.4	-24.21	0	63.7	-	-	74	-10.3	180	261	V
			* 5.149946	53.7	Pk	34.4	-24.21	0	63.89	-	-	74	-10.11	180	261	V
		5	* 5.15	32.8	RMS	34.4	-24.21	0.2	43.19	54	-10.81	-	-	180	261	V
			* 5.002417	34.56	RMS	34.3	-24.44	0.2	44.62	54	-9.38	-	-	180	261	V
			* 5.15	56.3	Pk	34.4	-37.58	0	53.12	-	-	74	-20.88	34	140	H
			* 5.008639	59.84	Pk	34.4	-37.74	0	56.5	-	-	74	-17.5	34	140	H
			* 5.15	45.53	RMS	34.4	-37.58	0.2	42.55	54	-11.45	-	-	34	140	H
			* 5.138501	47	RMS	34.4	-37.57	0.2	44.03	54	-9.97	-	-	34	140	H
			* 5.15	55.73	Pk	34.4	-37.58	0	52.55	-	-	74	-21.45	88	212	V
			* 5.039167	59.01	Pk	34.4	-37.7	0	55.71	-	-	74	-18.29	88	212	V
			* 5.15	45.46	RMS	34.4	-37.58	0.2	42.48	54	-11.52	-	-	88	212	V
			* 5.050862	47.13	RMS	34.4	-37.64	0.2	44.09	54	-9.91	-	-	88	212	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

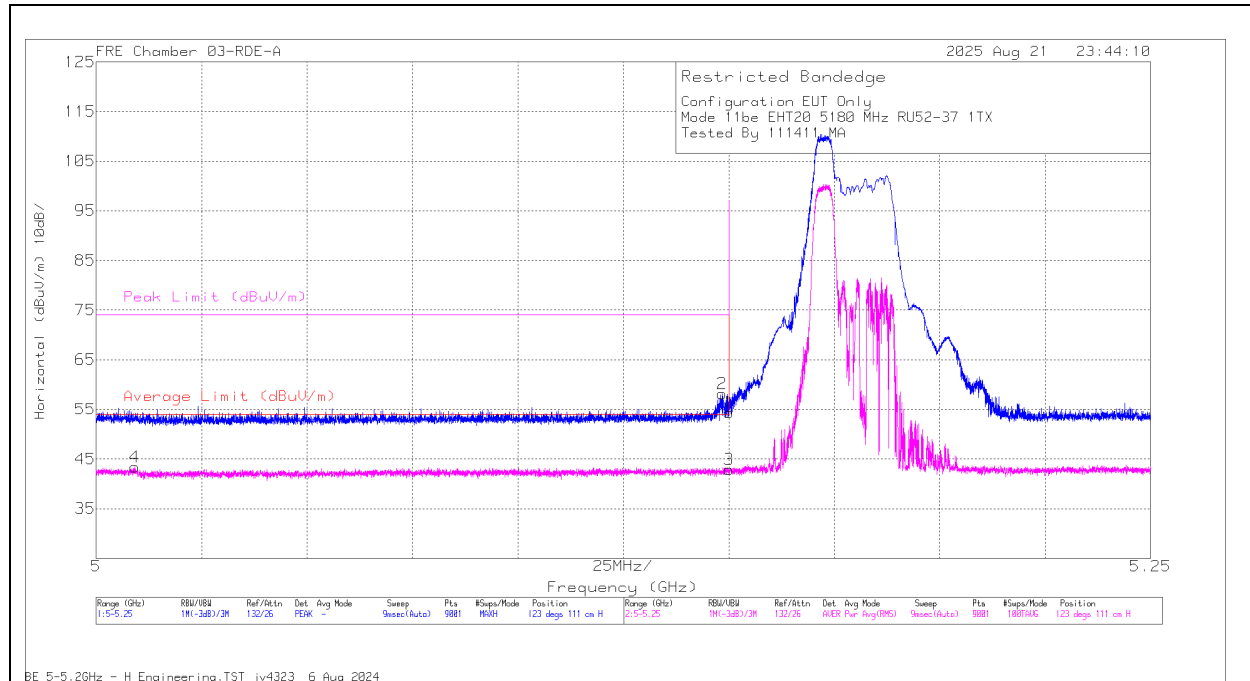
BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	58.61	Pk	34.2	0	-38.4	54.41	-	-	74	-19.59	123	111	H
2	* 5.148501	62.45	Pk	34.2	0	-38.45	58.2	-	-	74	-15.8	123	111	H
3	* 5.15	47.05	RMS	34.2	0	-38.4	42.85	54	-11.15	-	-	123	111	H
4	* 5.009139	48.04	RMS	34	0	-38.6	43.44	54	-10.56	-	-	123	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

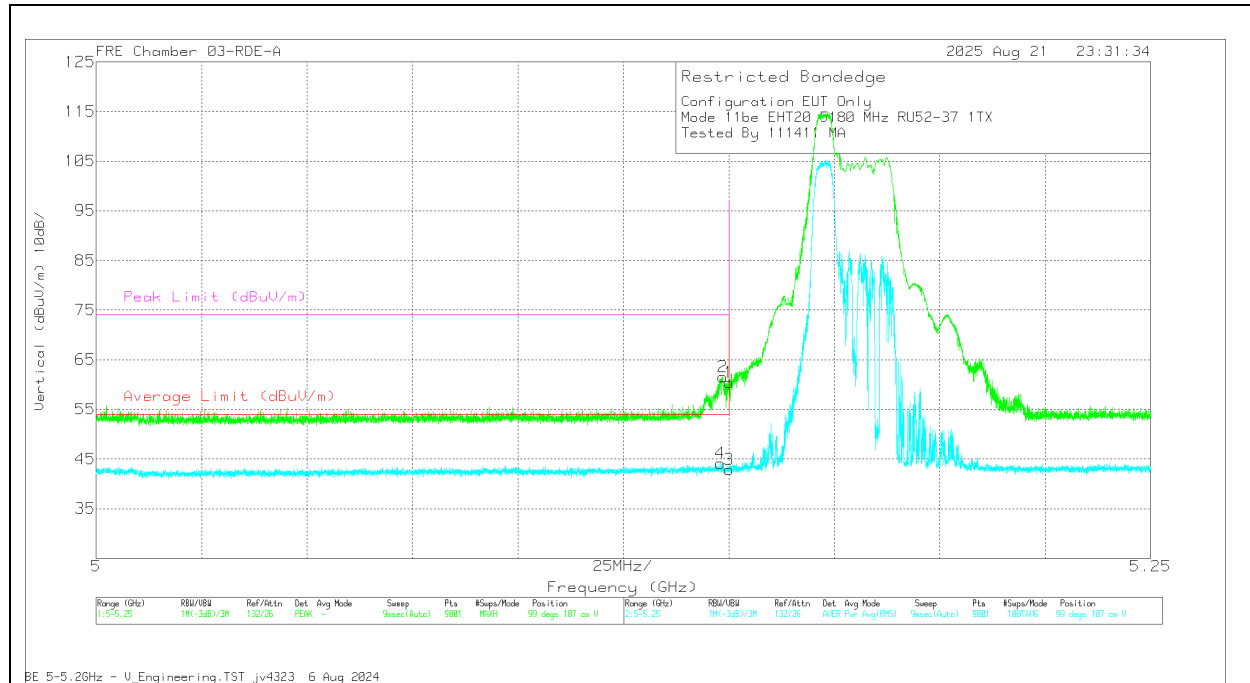BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	64.64	Pk	34.2	0	-38.4	60.44	-	-	74	-13.56	99	107	V
2	* 5.148557	65.78	Pk	34.2	0	-38.44	61.54	-	-	74	-12.46	99	107	V
3	* 5.15	47.11	RMS	34.2	0	-38.4	42.91	54	-11.09	-	-	99	107	V
4	* 5.148029	48.49	RMS	34.2	0	-38.5	44.19	54	-9.81	-	-	99	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5180	6 + 5	* 5.15	64.55	Pk	34	-35.43	0	63.12	-	-	74	-10.88	123	120	H
			* 5.148473	67.16	Pk	34	-35.43	0	65.73	-	-	74	-8.27	123	120	H
			* 5.15	48.48	RMS	34	-35.43	0	47.05	54	-6.95	-	-	123	120	H
			* 5.149723	48.89	RMS	34	-35.43	0	47.46	54	-6.54	-	-	123	120	H
			* 5.15	57.27	Pk	34	-35.43	0	55.84	-	-	74	-18.16	162	176	V
			* 5.149529	61.39	Pk	34	-35.43	0	59.96	-	-	74	-14.04	162	176	V
			* 5.15	46.12	RMS	34	-35.43	0	44.69	54	-9.31	-	-	162	176	V
			* 5.149751	46.48	RMS	34	-35.43	0	45.05	54	-8.95	-	-	162	176	V
EHT40 (SU Mode)	5190	6 + 5	* 5.15	65.92	Pk	34.3	-36.52	0	63.7	-	-	74	-10.3	348	244	H
			* 5.144334	70.45	Pk	34.3	-36.58	0	68.17	-	-	74	-5.83	348	244	H
			* 5.15	49.22	RMS	34.3	-36.52	0	47	54	-7	-	-	348	244	H
			* 5.149223	49.98	RMS	34.3	-36.43	0	47.85	54	-6.15	-	-	348	244	H
			* 5.15	55.97	Pk	34.3	-36.52	0	53.75	-	-	74	-20.25	101	338	V
			* 5.149307	62.25	Pk	34.3	-36.44	0	60.11	-	-	74	-13.89	101	338	V
			* 5.15	46.13	RMS	34.3	-36.52	0	43.91	54	-10.09	-	-	101	338	V
			* 5.090334	46.77	RMS	34.3	-36.85	0	44.22	54	-9.78	-	-	101	338	V
EHT80 (SU Mode)	5210	6 + 5	* 5.15	70.75	Pk	34.4	-38.33	0	66.82	-	-	74	-7.18	165	155	H
			* 5.149307	73.35	Pk	34.4	-38.34	0	69.41	-	-	74	-4.59	165	155	H
			* 5.15	53.02	RMS	34.4	-38.33	0	49.09	54	-4.91	-	-	165	155	H
			* 5.148335	55.14	RMS	34.4	-38.34	0	51.2	54	-2.8	-	-	165	155	H
			* 5.15	63.28	Pk	34.4	-38.33	0	59.35	-	-	74	-14.65	215	145	V
			* 5.148307	67.22	Pk	34.4	-38.34	0	63.28	-	-	74	-10.72	215	145	V
			* 5.15	47.63	RMS	34.4	-38.33	0	43.7	54	-10.3	-	-	215	145	V
			* 5.14739	49.37	RMS	34.4	-38.34	0	45.43	54	-8.57	-	-	215	145	V
EHT160 (SU Mode)	5250 (Lower)	6 + 5	* 5.15	51.59	Pk	34.4	-24.21	0	61.78	-	-	74	-12.22	170	231	H
			* 5.135862	57.97	Pk	34.4	-24.12	0	68.25	-	-	74	-5.75	170	231	H
			* 5.15	38	RMS	34.4	-24.21	0.14	48.33	54	-5.67	-	-	170	231	H
			* 5.130084	40.13	RMS	34.4	-24.08	0.14	50.59	54	-3.41	-	-	170	231	H
			* 5.15	46.16	Pk	34.4	-24.21	0	56.35	-	-	74	-17.65	253	125	V
			* 5.109529	52.65	Pk	34.3	-24.41	0	62.54	-	-	74	-11.46	253	125	V
			* 5.15	34.1	RMS	34.4	-24.21	0.14	44.43	54	-9.57	-	-	253	125	V
			* 5.118695	35.8	RMS	34.3	-24.28	0.14	45.96	54	-8.04	-	-	253	125	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

HORIZONTAL RESULT

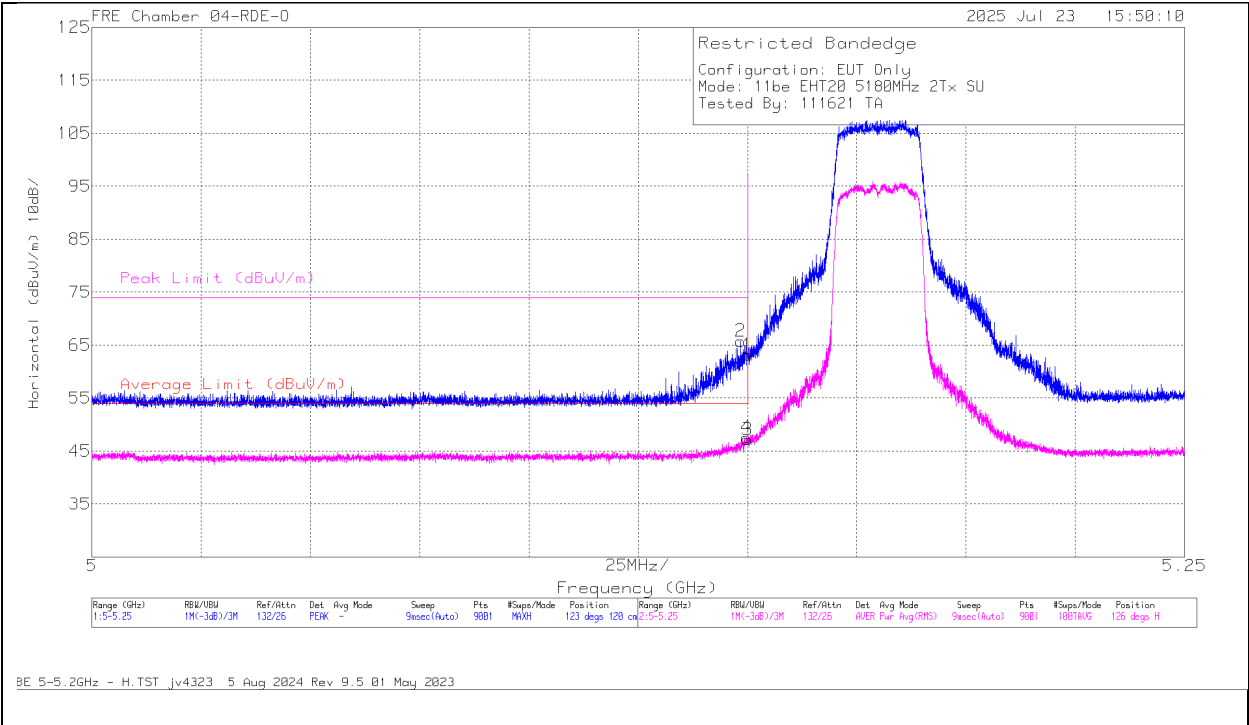

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	64.55	Pk	34	-35.43	0	63.12	-	-	74	-10.88	123	120	H
2	* 5.148473	67.16	Pk	34	-35.43	0	65.73	-	-	74	-8.27	123	120	H
3	* 5.15	48.48	RMS	34	-35.43	0	47.05	54	-6.95	-	-	123	120	H
4	* 5.149723	48.89	RMS	34	-35.43	0	47.46	54	-6.54	-	-	123	120	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5180MHz), SU MODE

VERTICAL RESULT

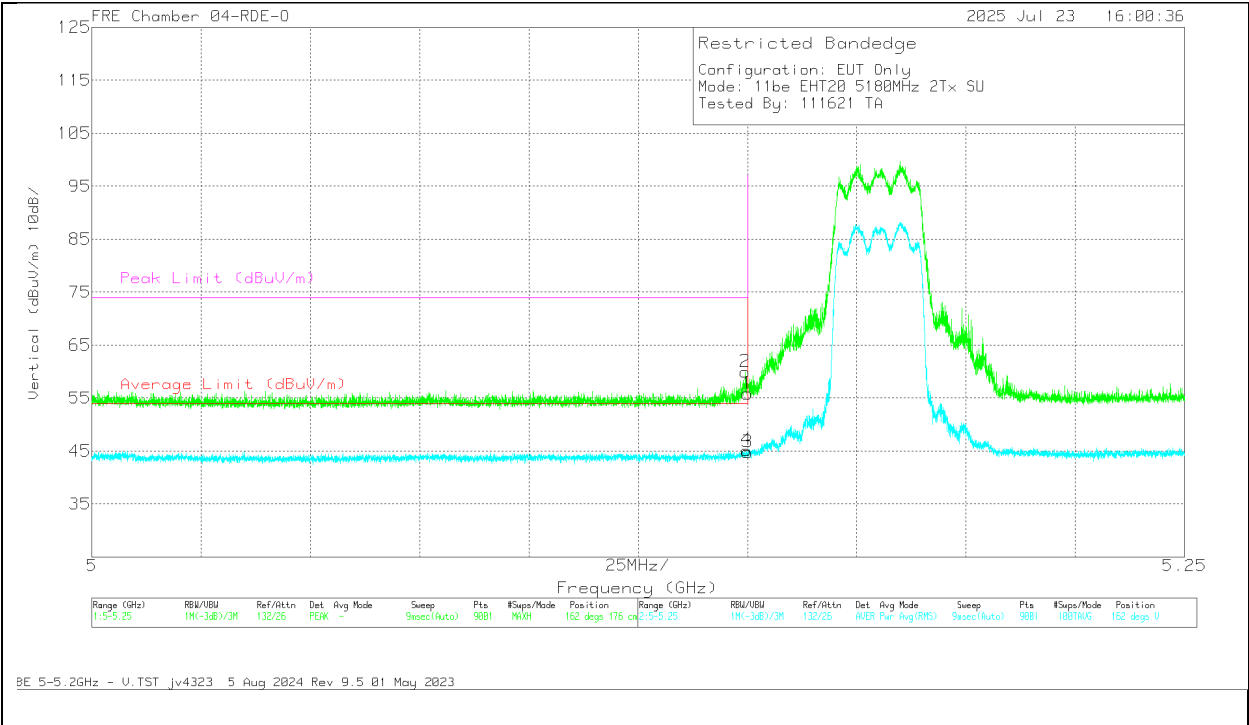

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	57.27	Pk	34	-35.43	0	55.84	-	-	74	-18.16	162	176	V
2	* 5.149529	61.39	Pk	34	-35.43	0	59.96	-	-	74	-14.04	162	176	V
3	* 5.15	46.12	RMS	34	-35.43	0	44.69	54	-9.31	-	-	162	176	V
4	* 5.149751	46.48	RMS	34	-35.43	0	45.05	54	-8.95	-	-	162	176	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection


1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5180	6 + 5	* 5.150	55.58	Pk	34	-35.43	0	54.15	-	-	74	-19.85	118	381	H
			* 5.148307	59.66	Pk	34	-35.43	0	58.23	-	-	74	-15.77	118	381	H
			* 5.150	45.23	RMS	34	-35.43	0	43.8	54	-10.2	-	-	118	381	H
			* 5.119584	46.29	RMS	34	-35.52	0	44.77	54	-9.23	-	-	118	381	H
			* 5.150	55.4	Pk	34	-35.43	0	53.97	-	-	74	-20.03	195	168	V
			* 5.082278	58.24	Pk	33.9	-35.47	0	56.67	-	-	74	-17.33	195	168	V
			* 5.150	44.57	RMS	34	-35.43	0	43.14	54	-10.86	-	-	195	168	V
			* 5.009611	46.6	RMS	33.8	-35.7	0	44.7	54	-9.3	-	-	195	168	V
EHT40 (242T / Index 61)	5190	6 + 5	* 5.150	42.62	Pk	34.4	-24.21	0	52.81	-	-	74	-21.19	258	291	H
			* 5.002472	46.51	Pk	34.3	-24.44	0	56.37	-	-	74	-17.63	258	291	H
			* 5.150	32.15	RMS	34.4	-24.21	0	42.34	54	-11.66	-	-	258	291	H
			* 5.003278	34.48	RMS	34.3	-24.43	0	44.35	54	-9.65	-	-	258	291	H
			* 5.150	42.57	Pk	34.4	-24.21	0	52.76	-	-	74	-21.24	222	103	V
			* 5.148085	46.93	Pk	34.4	-24.2	0	57.13	-	-	74	-16.87	222	103	V
			* 5.150	32.5	RMS	34.4	-24.21	0	42.69	54	-11.31	-	-	222	103	V
			* 5.001722	34.58	RMS	34.3	-24.44	0	44.44	54	-9.56	-	-	222	103	V
EHT40 (52T / Index 37))	5190	6 + 5	* 5.150	61.34	Pk	34.3	-36.52	0	59.12	-	-	74	-14.88	152	197	H
			* 5.149612	63.49	Pk	34.3	-36.48	0	61.31	-	-	74	-12.69	152	197	H
			* 5.150	45.55	RMS	34.3	-36.52	0.17	43.5	54	-10.5	-	-	152	197	H
			* 5.136334	47.03	RMS	34.3	-36.57	0.17	44.93	54	-9.07	-	-	152	197	H
			* 5.150	58.15	Pk	34.3	-36.52	0	55.93	-	-	74	-18.07	246	169	V
			* 5.14864	58.91	Pk	34.3	-36.48	0	56.73	-	-	74	-17.27	246	169	V
			* 5.150	45.2	RMS	34.3	-36.52	0.17	43.15	54	-10.85	-	-	246	169	V
			* 5.019472	46.5	RMS	34.3	-36.62	0.17	44.35	54	-9.65	-	-	246	169	V
EHT80 (242T / Index 61)	5210 (Lower)	6 + 5	* 5.15	67.43	Pk	34.4	-38.33	0	63.5	-	-	74	-10.5	159	183	H
			* 5.148862	70.21	Pk	34.4	-38.34	0	66.27	-	-	74	-7.73	159	183	H
			* 5.15	51.52	RMS	34.4	-38.33	0	47.59	54	-6.41	-	-	159	183	H
			* 5.149807	52.57	RMS	34.4	-38.33	0	48.64	54	-5.36	-	-	159	183	H
			* 5.15	60.78	Pk	34.4	-38.33	0	56.85	-	-	74	-17.15	242	180	V
			* 5.145529	63.24	Pk	34.4	-38.34	0	59.3	-	-	74	-14.7	242	180	V
			* 5.15	47.48	RMS	34.4	-38.33	0	43.55	54	-10.45	-	-	242	180	V
			* 5.149862	48.62	RMS	34.4	-38.33	0	44.69	54	-9.31	-	-	242	180	V
EHT80 (52T / Index 37)	5210 (Lower)	6 + 5	* 5.150	65.29	Pk	34.4	-38.33	0	61.36	-	-	74	-12.64	160	264	H
			* 5.146779	65.71	Pk	34.4	-38.33	0	61.78	-	-	74	-12.22	160	264	H
			* 5.150	46.22	RMS	34.4	-38.33	0.16	42.45	54	-11.55	-	-	160	264	H
			* 5.147362	47.64	RMS	34.4	-38.33	0.16	43.87	54	-10.13	-	-	160	264	H
			* 5.150	58.31	Pk	34.4	-38.33	0	54.38	-	-	74	-19.62	168	261	V
			* 5.147001	60.74	Pk	34.4	-38.33	0	56.81	-	-	74	-17.19	168	261	V
			* 5.150	46.79	RMS	34.4	-38.33	0.16	43.02	54	-10.98	-	-	168	261	V
			* 5.004972	47.83	RMS	34.3	-38.32	0.16	43.97	54	-10.03	-	-	168	261	V
EHT160 (242T / Index 61)	5250 (Lower)	6 + 5	* 5.150	47.74	Pk	34.4	-24.21	0	57.93	-	-	74	-16.07	43	171	H
			* 5.149946	49.84	Pk	34.4	-24.21	0	60.03	-	-	74	-13.97	43	171	H
			* 5.150	35.28	RMS	34.4	-24.21	0.1	45.57	54	-8.43	-	-	43	171	H
			* 5.149585	35.16	RMS	34.4	-24.2	0.1	45.46	54	-8.54	-	-	43	171	H
			* 5.150	53.57	Pk	34.4	-24.21	0	63.76	-	-	74	-10.24	28	102	V
			* 5.147807	56.23	Pk	34.4	-24.19	0	66.44	-	-	74	-7.56	28	102	V
			* 5.150	38.25	RMS	34.4	-24.21	0.1	48.54	54	-5.46	-	-	28	102	V
			* 5.149446	40.33	RMS	34.4	-24.2	0.1	50.63	54	-3.37	-	-	28	102	V
EHT160 (52T / Index 37)	5250 (Lower)	6 + 5	* 5.150	43.49	Pk	34.4	-24.21	0	53.68	-	-	74	-20.32	43	171	H
			* 5.149973	46.73	Pk	34.4	-24.21	0	56.92	-	-	74	-17.08	43	171	H
			* 5.150	32.05	RMS	34.4	-24.21	0.2	42.44	54	-11.56	-	-	43	171	H
			* 5.00425	34.5	RMS	34.3	-24.46	0.2	44.54	54	-9.46	-	-	43	171	H
			* 5.150	51.32	Pk	34.4	-24.21	0	61.51	-	-	74	-12.49	28	102	V
			* 5.149835	53.35	Pk	34.4	-24.21	0	63.54	-	-	74	-10.46	28	102	V
			* 5.150	32.35	RMS	34.4	-24.21	0.2	42.74	54	-11.26	-	-	28	102	V
			* 5.146723	34.12	RMS	34.4	-24.16	0.2	44.56	54	-9.44	-	-	28	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

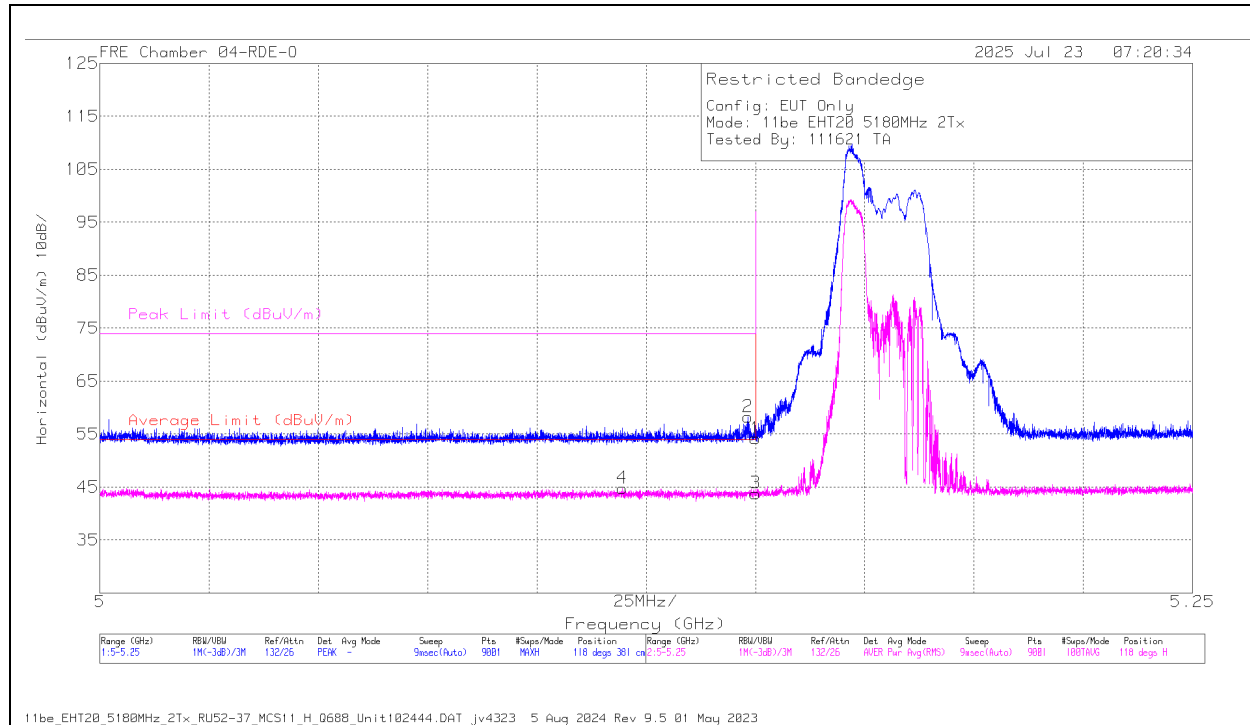BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.150	55.58	PK	34	0	-35.43	54.15	-	-	74	-19.85	118	381	H
2	* 5.148307	59.66	PK	34	0	-35.43	58.23	-	-	74	-15.77	118	381	H
1	* 5.150	45.23	RMS	34	0	-35.43	43.8	54	-10.2	-	-	118	381	H
3	* 5.119584	46.29	RMS	34	0	-35.52	44.77	54	-9.23	-	-	118	381	H

Pk - Peak detector

RMS - RMS detection

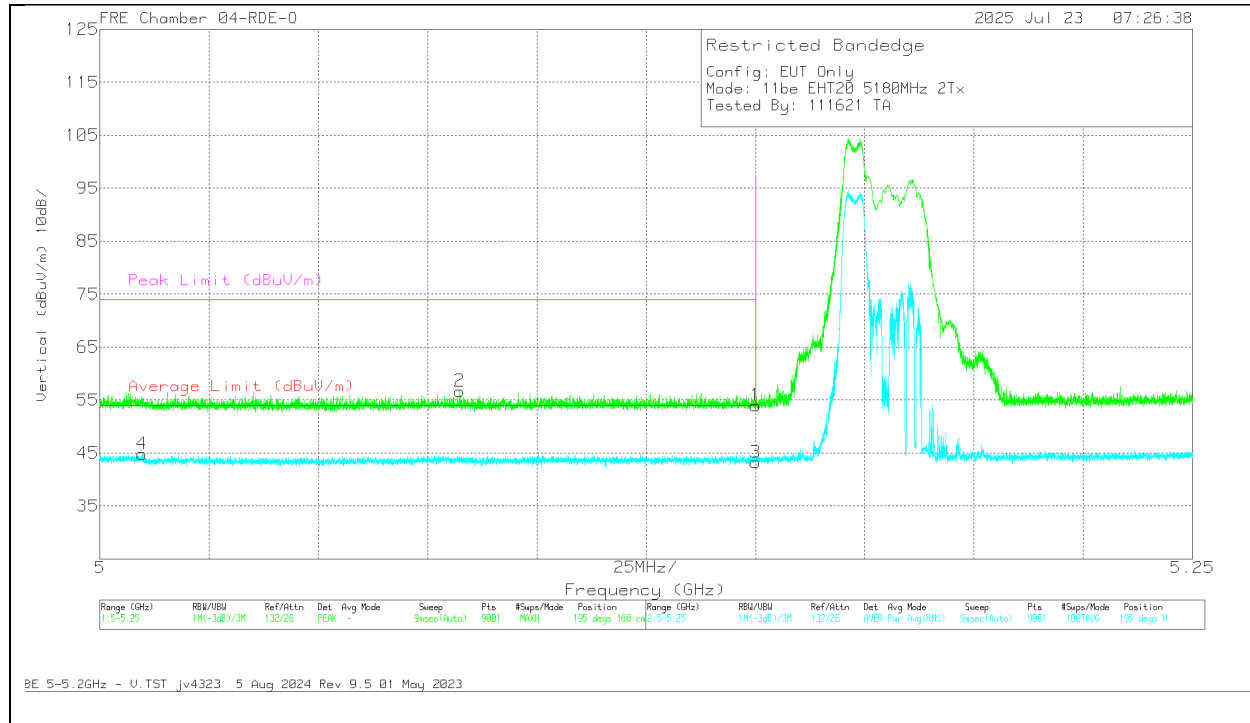BANDEDGE (LOW CHANNEL / 5180MHz), PARTIAL RU 52**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.150	55.4	Pk	34	0	-35.43	53.97	-	-	74	-20.03	195	168	V
4	* 5.082278	58.24	Pk	33.9	0	-35.47	56.67	-	-	74	-17.33	195	168	V
1	* 5.150	44.57	RMS	34	0	-35.43	43.14	54	-10.86	-	-	195	168	V
3	* 5.009611	46.6	RMS	33.8	0	-35.7	44.7	54	-9.3	-	-	195	168	V

Pk - Peak detector

RMS - RMS detection

1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5180	6 + 5	*2.338783	60.71	PK-U	32	-49.4	0	43.31	-	-	74	-30.69	202	148	H
			*2.338137	48.8	ADR	32	-49.4	0	31.4	54	-22.6	-	-	202	148	H
			*2.333683	60.46	PK-U	31.9	-49.33	0	43.03	-	-	74	-30.97	241	114	V
			*2.335344	48.89	ADR	32	-49.3	0	31.59	54	-22.41	-	-	241	114	V
			*8.171927	55.6	PK-U	36	-44.7	0	46.9	-	-	74	-27.1	184	220	H
			*8.172241	44.61	ADR	36	-44.7	0	35.91	54	-18.09	-	-	184	220	H
			*12.34791	53.9	PK-U	38.9	-42.9	0	49.9	-	-	74	-24.1	141	213	H
			*12.34471	42.44	ADR	38.9	-42.8	0	38.54	54	-15.46	-	-	141	213	H
			*8.186646	55.95	PK-U	36	-45.1	0	46.85	-	-	74	-27.15	321	281	V
			*8.185568	44.58	ADR	36	-45.06	0	35.52	54	-18.48	-	-	321	281	V
			*12.27603	53.71	PK-U	38.9	-43	0	49.61	-	-	74	-24.39	116	250	V
			*12.275107	42.23	ADR	38.9	-42.91	0	38.22	54	-15.78	-	-	116	250	V
	5200	6 + 5	*2.243875	60.59	PK-U	31.6	-49	0	43.19	-	-	74	-30.81	313	330	H
			*2.211192	48.59	ADR	31.6	-49.02	0	31.17	54	-22.83	-	-	313	330	H
			*2.294777	60.83	PK-U	31.8	-49.3	0	43.33	-	-	74	-30.67	231	292	V
			*2.295192	48.72	ADR	31.8	-49.3	0	31.22	54	-22.78	-	-	231	292	V
			*7.612283	55.78	PK-U	35.9	-44.3	0	47.38	-	-	74	-26.62	193	320	H
			*7.613724	44.08	ADR	35.9	-44.3	0	35.68	54	-18.32	-	-	193	320	H
			*12.0202986	54	PK-U	38.8	-43	0	49.8	-	-	74	-24.2	254	168	H
			*12.020524	42.48	ADR	38.8	-43	0	38.28	54	-15.72	-	-	254	168	H
			*7.640819	55.54	PK-U	35.9	-45.2	0	46.24	-	-	74	-27.76	180	280	V
			*7.642751	44.2	ADR	35.9	-45.28	0	34.82	54	-19.18	-	-	180	280	V
			*11.971581	54.36	PK-U	38.7	-43.1	0	49.96	-	-	74	-24.04	234	177	V
			*11.9703	42.72	ADR	38.7	-43.1	0	38.32	54	-15.68	-	-	234	177	V
	5240	6 + 5	*8.139215	55.95	PK-U	36	-44.58	0	47.37	-	-	74	-26.33	166	225	H
			*8.138364	44.05	ADR	36	-44.6	0	35.45	54	-18.55	-	-	166	225	H
			*12.394175	53.95	PK-U	38.9	-42.5	0	50.35	-	-	74	-23.65	65	304	H
			*12.396321	42.26	ADR	38.9	-42.5	0	38.66	54	-15.34	-	-	65	304	H
			*8.145911	55.53	PK-U	36	-44.5	0	47.03	-	-	74	-26.97	233	287	V
			*8.14611	44.04	ADR	36	-44.5	0	35.54	54	-18.46	-	-	233	287	V
			*12.437956	54.14	PK-U	38.9	-42.4	0	50.64	-	-	74	-23.36	340	179	V
			*12.437858	42.51	ADR	38.9	-42.4	0	39.01	54	-14.99	-	-	340	179	V
			2.300012	49.19	ADR	31.8	-49.3	0	31.69	-	-	-	-	111	205	V
			2.300172	60.33	PK-U	31.8	-49.3	0	42.83	-	-	68.2	-25.37	111	205	V
			2.302503	48.93	ADR	31.8	-49.3	0	31.43	-	-	-	-	275	119	H
			2.302809	60.07	PK-U	31.8	-49.3	0	42.57	-	-	68.2	-25.63	275	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5190	6 + 5	2.438143	60.58	PK-U	32.5	-50.11	0	42.97	-	-	68.2	-25.23	360	199	H
			2.447369	49.03	ADR	32.4	-50.17	0	31.26	-	-	-	-	360	199	H
			2.439122	60.85	PK-U	32.5	-50.1	0	43.25	-	-	68.2	-24.95	360	199	V
			2.446782	49.01	ADR	32.4	-50.17	0	31.24	-	-	-	-	360	199	V
			11.460672	55.1	PK-U	38.1	-44.45	0	48.75	-	-	74	-25.25	360	199	H
			11.444205	43.38	ADR	38.1	-44.74	0	36.74	54	-17.26	-	-	360	199	H
			14.963209	54.69	PK-U	39.9	-41.76	0	52.83	-	-	68.2	-15.37	360	199	H
			14.967845	42.76	ADR	39.9	-41.86	0	40.8	-	-	-	-	360	199	H
			11.457636	55.61	PK-U	38.1	-44.45	0	49.26	-	-	74	-24.74	360	199	V
			11.44685	43.65	ADR	38.1	-44.71	0	37.04	54	-16.96	-	-	360	199	V
			14.985825	54.62	PK-U	40	-42.28	0	52.34	-	-	68.2	-16.06	360	199	V
			14.985283	53.05	ADR	40	-42.4	0	50.65	-	-	-	-	360	199	V
	5230	6 + 5	2.210915	61.09	PK-U	31.8	-50.32	0	42.57	-	-	74	-31.43	360	199	H
			2.213601	49.37	ADR	31.8	-50.31	0	30.86	54	-23.14	-	-	360	199	H
			2.208803	61.14	PK-U	31.8	-50.28	0	42.66	-	-	74	-31.34	360	199	V
			2.21333	49.44	ADR	31.8	-50.3	0	30.94	54	-23.06	-	-	360	199	V
			12.702836	54.59	PK-U	39	-43.06	0	50.53	-	-	68.2	-17.67	360	199	H
			12.685445	43.09	ADR	39	-43.18	0	38.91	54	-15.09	-	-	360	199	H
			16.815724	54.06	PK-U	41.1	-42.1	0	53.06	-	-	68.2	-15.14	360	199	H
			16.837071	42.53	ADR	41.1	-41.82	0	41.81	-	-	-	-	360	199	H
			12.681842	54.55	PK-U	39	-43.16	0	50.39	-	-	74	-23.61	360	199	V
			12.676291	42.87	ADR	39	-42.93	0	38.94	54	-15.06	-	-	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5210	6 + 5	* 2.347659	58.06	PK-U	31.9	-48.78	0	41.18	-	-	74	-32.82	0	101	H
			* 2.348214	46.79	ADR	31.9	-48.78	0	29.91	54	-24.09	-	-	0	101	H
			* 2.664646	57.64	PK-U	32.4	-48.33	0	41.71	-	-	74	-32.29	0	101	H
			* 2.662912	46.15	ADR	32.4	-48.34	0	30.21	54	-23.79	-	-	0	101	H
			* 9.336599	57.57	PK-U	36.6	-44.97	0	49.2	-	-	74	-24.8	0	101	H
			* 9.33433	45.42	ADR	36.6	-44.97	0	37.05	54	-16.95	-	-	0	101	H
			* 11.295653	55.55	PK-U	38.1	-42.49	0	51.16	-	-	74	-22.84	0	101	V
			* 11.296122	43.82	ADR	38.1	-42.49	0	39.43	54	-14.57	-	-	0	101	V
			3.014845	55.85	PK-U	32.4	-46.48	0	41.77	-	-	68.2	-26.43	0	199	V
			3.016087	44.16	ADR	32.4	-46.48	0	30.08	-	-	-	-	0	199	V
			10.487755	56.92	PK-U	37.7	-43.56	0	51.06	-	-	68.2	-17.14	0	101	V
			10.488272	44.75	ADR	37.7	-43.54	0	38.91	-	-	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 2.803432	47.14	PK-U	32.4	-25.97	0	53.57	-	-	74	-20.43	223	262	H
			* 2.788586	34.63	ADR	32.4	-25.96	0	41.07	54	-12.93	-	-	223	262	H
			* 2.772378	45.96	PK-U	32.4	-25.98	0	52.38	-	-	74	-21.62	304	120	V
			* 2.799546	34.96	ADR	32.4	-26.06	0	41.3	54	-12.7	-	-	304	120	V
			* 11.469929	55.9	PK-U	38.3	-44.65	0	49.55	-	-	74	-24.45	291	229	H
			* 11.479392	44.71	ADR	38.3	-44.62	0	38.39	54	-15.61	-	-	291	229	H
			* 11.429548	56.03	PK-U	38.3	-44.75	0	49.58	-	-	74	-24.42	229	154	V
			* 11.456496	44.54	ADR	38.3	-44.64	0	38.2	54	-15.8	-	-	229	154	V
			8.646533	45.32	ADR	36.1	-45.5	0	35.92	-	-	-	-	353	396	V
			8.654505	44.77	ADR	36.1	-45.38	0	35.49	-	-	-	-	322	175	H
			8.654827	56.34	PK-U	36.1	-45.39	0	47.05	-	-	68.2	-21.15	322	175	H
			8.675682	56.82	PK-U	36.1	-45.39	0	47.53	-	-	68.2	-20.67	353	396	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)

LOW CHANNEL RESULTS

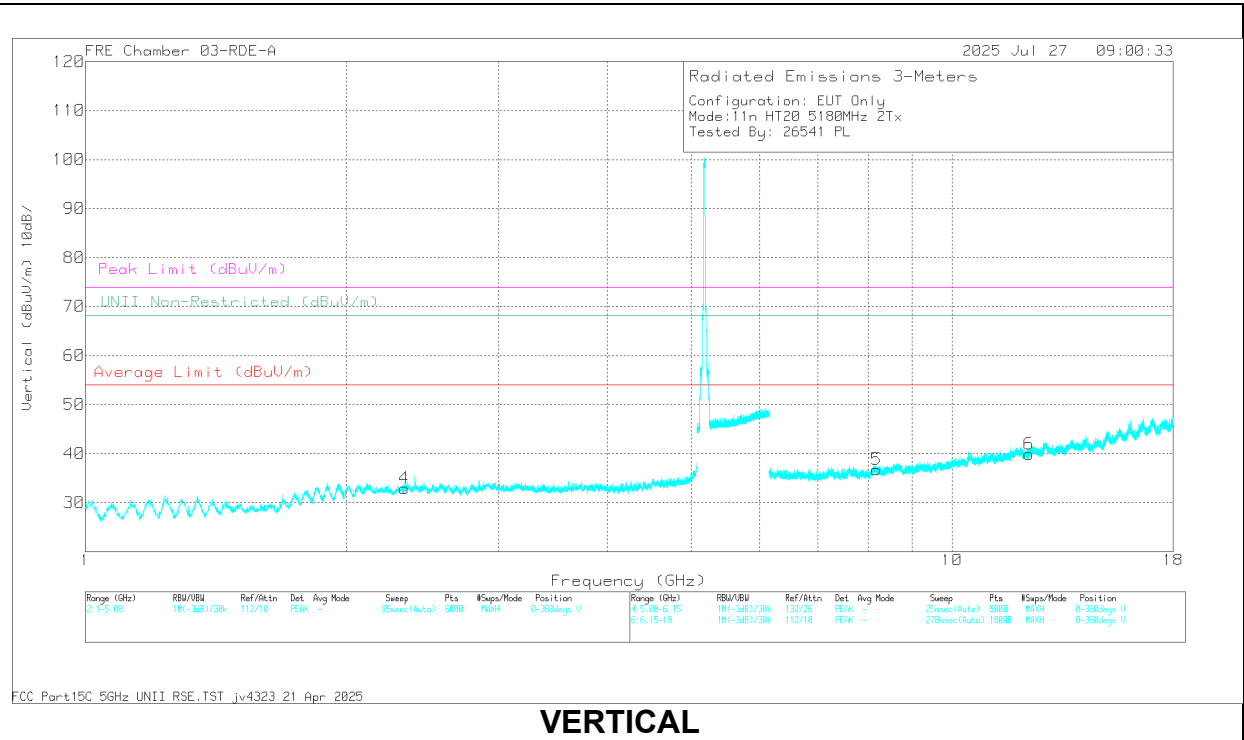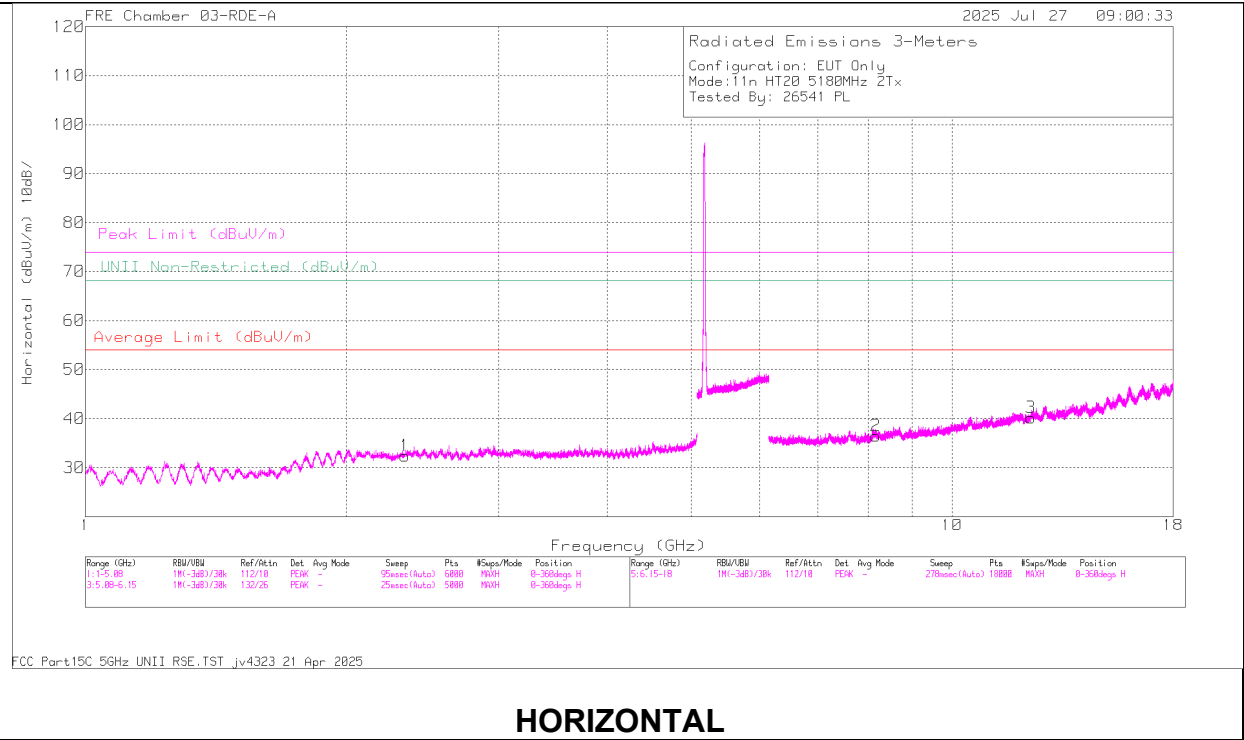

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.338783	60.71	PK-U	32	-49.4	0	43.31	-	-	74	-30.69	202	148	H
1	*2.338137	48.8	ADR	32	-49.4	0	31.4	54	-22.6	-	-	202	148	H
4	*2.33683	60.46	PK-U	31.9	-49.33	0	43.03	-	-	74	-30.97	241	114	V
4	*2.335344	48.89	ADR	32	-49.3	0	31.59	54	-22.41	-	-	241	114	V
2	*8.171927	55.6	PK-U	36	-44.7	0	46.9	-	-	74	-27.1	184	220	H
2	*8.172241	44.61	ADR	36	-44.7	0	35.91	54	-18.09	-	-	184	220	H
3	*12.34791	53.9	PK-U	38.9	-42.9	0	49.9	-	-	74	-24.1	141	213	H
3	*12.34471	42.44	ADR	38.9	-42.8	0	38.54	54	-15.46	-	-	141	213	H
5	*8.186646	55.95	PK-U	36	-45.1	0	46.85	-	-	74	-27.15	321	281	V
5	*8.185568	44.58	ADR	36	-45.06	0	35.52	54	-18.48	-	-	321	281	V
6	*12.27603	53.71	PK-U	38.9	-43	0	49.61	-	-	74	-24.39	116	250	V
6	*12.275107	42.23	ADR	38.9	-42.91	0	38.22	54	-15.78	-	-	116	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11be MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5180	6 + 5	* 11.520343	52.61	PK-U	38	-40.31	0	50.3	-	-	74	-23.7	360	100	H
			* 11.520513	41.28	ADR	38	-40.32	0	38.96	54	-15.04	-	-	360	100	H
			* 15.779382	52.53	PK-U	40.2	-37.99	0	54.74	-	-	74	-19.26	360	100	H
			* 15.781867	41.14	ADR	40.2	-37.95	0	43.39	54	-10.61	-	-	360	100	H
			* 11.503078	53.2	PK-U	38	-40.11	0	51.09	-	-	74	-22.91	360	201	V
			* 11.50366	40.83	ADR	38	-40.1	0	38.73	54	-15.27	-	-	360	201	V
			* 15.773684	52.26	PK-U	40.2	-38.08	0	54.38	-	-	74	-19.62	360	200	V
			* 15.77178	41.22	ADR	40.2	-38.1	0	43.32	54	-10.68	-	-	360	200	V
			1.903115	58.21	PK-U	30.7	-46.4	0	42.51	-	-	68.2	-25.69	360	100	H
			1.903341	46.54	ADR	30.7	-46.4	0	30.84	-	-	-	-	360	100	H
			1.906159	46.63	ADR	30.7	-46.44	0	30.89	-	-	-	-	360	201	V
			1.906279	58.62	PK-U	30.7	-46.44	0	42.88	-	-	68.2	-25.32	360	201	V
	5200	6 + 5	1.951121	61.62	PK-U	31.4	-50.16	0	42.86	-	-	68.2	-25.34	333	246	H
			2.60452	60.42	PK-U	32.4	-49.65	0	43.17	-	-	68.2	-25.03	322	341	V
			2.600274	60.23	PK-U	32.4	-49.67	0	42.96	-	-	68.2	-25.24	322	341	V
			10.430978	56.26	PK-U	37.8	-45.73	0	48.33	-	-	68.2	-19.87	0	163	H
			15.591252	53.44	PK-U	41.1	-41.51	0	53.03	-	-	74	-20.97	111	231	H
			15.570466	41.74	ADR	41	-41.87	0	40.87	54	-13.13	-	-	111	231	H
			10.390871	56.26	PK-U	37.7	-45.64	0	48.32	-	-	68.2	-19.88	225	195	V
			15.602012	53.31	PK-U	41.1	-41.55	0	52.86	-	-	74	-21.14	283	219	V
			15.592043	41.8	ADR	41.1	-41.48	0	41.42	54	-12.58	-	-	283	219	V
			15.598372	53.6	PK-U	41.1	-41.48	0	53.22	-	-	74	-20.78	283	219	V
			15.595603	41.87	ADR	41.1	-41.45	0	41.52	54	-12.48	-	-	283	219	V
			2.599643	61.1	PK-U	32.4	-48.95	0	44.55	-	-	68.2	-23.65	238	272	H
	5240	6 + 5	2.601191	61.07	PK-U	32.4	-48.93	0	44.54	-	-	68.2	-23.66	321	396	V
			2.61147	49.51	ADR	32.4	-48.9	0	33.01	-	-	-	-	238	272	H
			2.612551	49.39	ADR	32.4	-48.88	0	32.91	-	-	-	-	321	396	V
			10.468574	47.84	ADR	37.6	-45.95	0	39.49	-	-	-	-	316	319	H
			10.475344	48.29	ADR	37.6	-45.83	0	40.06	-	-	-	-	214	280	V
			10.475352	59.82	PK-U	37.6	-45.83	0	51.59	-	-	68.2	-16.61	316	319	H
			10.479744	59.64	PK-U	37.6	-45.94	0	51.3	-	-	68.2	-16.9	214	280	V
			12.968721	58.84	PK-U	39.1	-43.96	0	53.98	-	-	68.2	-14.22	233	338	H
			12.976489	58.88	PK-U	39.1	-43.95	0	54.03	-	-	68.2	-14.17	67	360	V
			12.993655	46.98	ADR	39	-43.8	0	42.18	-	-	-	-	233	338	H
			13.012467	47.03	ADR	39	-43.75	0	42.28	-	-	-	-	67	360	V
11be (52T / Highest PSD)	5180 (Low Index)	6 + 5	1.688679	61.06	PK-U	28.8	-49.88	0	39.98	-	-	74	-34.02	54	131	H
			1.894616	50.06	ADR	31.3	-50.28	0	31.08	-	-	-	-	54	131	H
			1.617179	61.07	PK-U	28.6	-49.92	0	39.75	-	-	74	-34.25	54	131	H
			1.893991	50.07	ADR	31.3	-50.27	0	31.1	-	-	-	-	54	131	H
			2.604523	60.34	PK-U	32.4	-49.65	0	43.09	-	-	68.2	-25.11	51	309	V
			2.608643	48.62	ADR	32.4	-49.68	0	31.34	-	-	-	-	51	309	V
			2.604869	60.29	PK-U	32.4	-49.65	0	43.04	-	-	68.2	-25.16	51	309	V
			2.605896	48.87	ADR	32.4	-49.67	0	31.6	-	-	-	-	51	309	V
			10.31907	56.39	PK-U	37.7	-45.86	0	48.23	-	-	68.2	-19.97	324	159	H
			10.323207	45.13	ADR	37.7	-45.65	0	37.18	-	-	-	-	324	159	H
			15.525836	53.82	PK-U	41	-41.62	0	53.2	-	-	74	-20.8	309	228	H
			15.51813	42.54	ADR	41	-41.72	0	41.82	54	-12.18	-	-	309	228	H
	5200 (Mid Index)	6 + 5	10.334961	57.06	PK-U	37.7	-45.63	0	49.13	-	-	68.2	-19.07	251	138	V
			10.338299	44.81	ADR	37.7	-45.47	0	37.04	-	-	-	-	251	138	V
			15.552304	53.99	PK-U	41.1	-41.76	0	53.33	-	-	74	-20.67	181	211	V
			15.531762	42.34	ADR	41	-41.63	0	41.71	54	-12.29	-	-	181	211	V
			2.6041	60.52	PK-U	32.4	-49.65	0	43.27	-	-	68.2	-24.93	64	332	H
			2.613554	48.75	ADR	32.4	-49.73	0	31.42	-	-	-	-	64	332	H
			2.603635	60.14	PK-U	32.4	-49.65	0	42.89	-	-	68.2	-25.31	164	170	V
			2.605775	48.56	ADR	32.4	-49.67	0	31.29	-	-	-	-	164	170	V
			2.608202	60.43	PK-U	32.4	-49.69	0	43.14	-	-	68.2	-25.06	164	170	V
			2.610055	48.65	ADR	32.4	-49.7	0	31.35	-	-	-	-	164	170	V
			10.38326	56.07	PK-U	37.7	-45.53	0	48.24	-	-	68.2	-19.96	225	117	H
			10.371384	44.48	ADR	37.7	-45.58	0	36.6	-	-	-	-	225	117	H
	5240 (High Index)	6 + 5	15.625796	53.62	PK-U	41.1	-41.99	0	52.73	-	-	74	-21.27	208	262	H
			15.630089	41.6	ADR	41.2	-41.98	0	40.82	54	-13.18	-	-	208	262	H
			10.376694	56.86	PK-U	37.7	-45.76	0	48.8	-	-	68.2	-19.4	143	116	V
			10.379556	44.78	ADR	37.7	-45.74	0	36.74	-	-	-	-	143	116	V
			15.592834	52.99	PK-U	41.1	-41.44	0	52.65	-	-	74	-21.35	226	109	V
			15.6065	41.12	ADR	41.2	-41.59	0	40.73	54	-13.27	-	-	226	109	V
			2.688639	61.5	PK-U	32.6	-48.92	0	45.18	-	-	74	-28.82	101	333	H
			2.714873	60.62	PK-U	32.4	-48.91	0	44.11	-	-	74	-29.89	207	157	V
			2.716413	49.24	ADR	32.4	-48.87	0	32.77	54	-21.23	-	-	101	333	H
			2.720373	49.26	ADR	32.4	-48.85	0	32.81	54	-21.19	-	-	207	157	V
			9.18436	58	PK-U	36.4	-44.62	0	49.78	-	-	74	-24.22	6	151	H
			9.211678	57.45	PK-U	36.5	-44.47	0	49.48	-	-	68.2	-18.72	268	280	V
			9.212067	45.69	ADR	36.5	-44.45	0	37.74	-	-	-	-	6	151	H
			9.233824	45.89	ADR	36.5	-44.27	0	38.12	-	-	-	-	268	280	V
			12.516608	59.52	PK-U	39	-43.82	0	54.7	-	-	74	-19.3	341	350	H
			12.531999	46.9	ADR	39	-43.87	0	42.03	54	-11.97	-	-	341	350	H
			12.542379	46.98	ADR	39	-43.74	0	42.24	54	-11.76	-	-	110	349	V
			12.547183	58.75	PK-U	39	-44	0	53.75	-	-	74	-20.25	110	349	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/ Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5190	6 + 5	* 4.135913	56.34	PK-U	33.5	-46.4	0	43.44	-	-	74	-30.56	245	144	H
			* 4.133923	44.53	ADR	33.5	-46.44	0	31.59	54	-22.41	-	-	245	144	H
			* 4.123889	56.45	PK-U	33.5	-46.4	0	43.55	-	-	74	-30.45	325	180	V
			* 4.124907	44.34	ADR	33.5	-46.38	0	31.46	54	-22.54	-	-	325	180	V
			* 7.543015	56.63	PK-U	35.9	-46.18	0	46.35	-	-	74	-27.65	174	101	H
			* 7.539951	44.8	ADR	35.9	-46.21	0	34.49	54	-19.51	-	-	174	101	H
			* 7.54935	56	PK-U	35.9	-46.1	0	45.8	-	-	74	-28.2	317	290	V
			* 7.550187	44.58	ADR	35.9	-46.1	0	34.38	54	-19.62	-	-	317	290	V
			8.914833	54.03	PK-U	36.2	-42.9	0	47.33	-	-	68.2	-20.87	240	211	V
			8.915053	42.4	ADR	36.2	-42.9	0	35.7	-	-	-	-	240	211	V
	5230	6 + 5	8.92683	42.57	ADR	36.2	-42.92	0	35.85	-	-	-	-	75	276	H
			8.926918	53.92	PK-U	36.2	-42.92	0	47.2	-	-	68.2	-21	75	276	H
			* 3.721684	56.18	PK-U	33.2	-46.27	0	43.11	-	-	74	-30.89	43	369	H
			* 3.723079	44.59	ADR	33.2	-46.28	0	31.51	54	-22.49	-	-	43	369	H
			* 3.709145	56.39	PK-U	33.2	-46.33	0	43.26	-	-	74	-30.74	194	140	V
			* 3.707156	44.48	ADR	33.2	-46.33	0	31.35	54	-22.65	-	-	194	140	V
			* 7.545998	55.88	PK-U	35.9	-46.14	0	45.64	-	-	74	-28.36	142	238	H
			* 7.544141	44.56	ADR	35.9	-46.17	0	34.29	54	-19.71	-	-	142	238	H
			* 7.530839	56.62	PK-U	35.8	-46.23	0	46.19	-	-	74	-27.81	57	338	V
			* 7.533887	44.89	ADR	35.9	-46.17	0	34.62	54	-19.38	-	-	57	338	V
11be (242T / Highest PSD)	5190 (Low index)	6 + 5	10.031476	57.51	PK-U	37.2	-46.74	0	47.97	-	-	68.2	-20.23	214	331	H
			10.034441	46.25	ADR	37.2	-46.78	0	36.67	-	-	-	-	214	331	H
			10.051766	57.24	PK-U	37.3	-46.54	0	48	-	-	68.2	-20.2	193	254	V
			10.054499	46.17	ADR	37.3	-46.46	0	37.01	-	-	-	-	193	254	V
			2.162199	61.3	PK-U	31.7	-50.34	0	42.66	-	-	68.2	-25.54	29	322	H
			1.995011	49.86	ADR	32	-49.82	0	32.04	-	-	-	-	29	322	H
			2.59982	60.05	PK-U	32.4	-49.67	0	42.78	-	-	68.2	-25.42	263	334	V
			2.610767	48.8	ADR	32.4	-49.72	0	31.48	-	-	-	-	263	334	V
			10.374948	57.07	PK-U	37.7	-45.66	0	49.11	-	-	68.2	-19.09	276	229	H
			10.387522	44.8	ADR	37.7	-45.51	0	36.99	-	-	-	-	276	229	H
			15.597289	53.35	PK-U	41.1	-41.48	0	52.97	-	-	74	-21.03	12	249	H
			15.586031	41.69	ADR	41.1	-41.61	0	41.18	54	-12.82	-	-	12	249	H
			10.365239	56.9	PK-U	37.7	-45.83	0	48.77	-	-	68.2	-19.43	142	382	V
			10.375377	44.92	ADR	37.7	-45.7	0	36.92	-	-	-	-	142	382	V
			10.381897	56.7	PK-U	37.7	-45.61	0	48.79	-	-	68.2	-19.41	142	382	V
			10.375524	45.04	ADR	37.7	-45.72	0	37.02	-	-	-	-	142	382	V
			15.585372	53.75	PK-U	41.1	-41.62	0	53.23	-	-	74	-20.77	107	253	V
			15.584483	41.98	ADR	41.1	-41.64	0	41.44	54	-12.56	-	-	107	253	V
			15.590892	53.2	PK-U	41.1	-41.52	0	52.78	-	-	74	-21.22	107	253	V
			15.577456	41.84	ADR	41.1	-41.73	0	41.21	54	-12.79	-	-	107	253	V
			2.600347	60.81	PK-U	32.4	-49.67	0	43.54	-	-	68.2	-24.66	254	399	H
			2.607247	48.78	ADR	32.4	-49.67	0	31.51	-	-	-	-	254	399	H
			2.603746	60.02	PK-U	32.4	-49.65	0	42.77	-	-	68.2	-25.43	205	294	V
			2.608206	48.78	ADR	32.4	-49.69	0	31.49	-	-	-	-	205	294	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5210	6 + 5	* 2.342925	57.93	PK-U	31.8	0	-47	42.73	-	-	74	-31.27	0	199	H
			* 2.345437	46.35	ADR	31.8	0	-47.04	31.11	54	-22.89	-	-	0	199	H
			* 2.342803	57.74	PK-U	31.8	0	-47	42.54	-	-	74	-31.46	0	101	V
			* 2.342308	46.49	ADR	31.8	0	-47	31.29	54	-22.71	-	-	0	101	V
			9.871727	53.73	PK-U	37.2	0	-42.03	48.9	-	-	68.2	-19.3	0	199	H
			9.870109	42.54	ADR	37.2	0	-42.01	37.73	-	-	-	-	0	199	H
			14.351685	54.45	PK-U	39.2	0	-42.57	51.08	-	-	68.2	-17.12	0	101	H
			14.351168	42.82	ADR	39.2	0	-42.52	39.5	-	-	-	-	0	101	H
			9.865924	54.25	PK-U	37.2	0	-42.11	49.34	-	-	68.2	-18.86	0	200	V
			9.869179	42.52	ADR	37.2	0	-42	37.72	-	-	-	-	0	200	V
			14.350213	54.56	PK-U	39.2	0	-42.66	51.1	-	-	68.2	-17.1	0	200	V
			14.351787	42.9	ADR	39.2	0	-42.58	39.52	-	-	-	-	0	200	V
			1.893018	60.92	PK-U	30.8	0	-49.18	42.54	-	-	68.2	-25.66	360	201	V
			1.894325	49.57	ADR	30.8	0	-49.16	31.21	-	-	-	-	360	201	V
11be (242T)	5210 (Low Index)	6 + 5	1.895491	61.06	PK-U	30.8	0	-49.19	42.67	-	-	68.2	-25.53	360	100	H
			1.895945	49.39	ADR	30.8	0	-49.23	30.96	-	-	-	-	360	100	H
			8.893533	55.26	PK-U	36.1	0	-42.93	48.43	-	-	68.2	-19.77	360	100	H
			8.899399	43.47	ADR	36.1	0	-42.9	36.67	-	-	-	-	360	201	V
			8.900639	43.78	ADR	36.1	0	-42.91	36.97	-	-	-	-	360	100	H
			8.903043	55.22	PK-U	36.1	0	-42.92	48.4	-	-	68.2	-19.8	360	201	V
			14.112346	58.67	PK-U	39	0	-43.89	53.78	-	-	68.2	-14.42	360	200	V
			14.120381	46.66	ADR	39	0	-43.91	41.75	-	-	-	-	360	200	V
			14.127486	46.64	ADR	39	0	-43.87	41.77	-	-	-	-	360	100	H
			14.142753	58.17	PK-U	39	0	-43.82	53.35	-	-	68.2	-14.85	360	100	H
			* 15.63712	50.84	PK-U	40.4	0	-40.75	50.49	-	-	74	-23.51	18	385	H
			* 15.63777	39.45	ADR	40.4	0.17	-40.78	39.24	54	-14.76	-	-	18	385	H
			* 15.633016	50.91	PK-U	40.4	0	-40.63	50.68	-	-	74	-23.32	199	379	V
			* 15.634123	39.58	ADR	40.4	0.17	-40.64	39.51	54	-14.49	-	-	199	379	V
11be (52T / Highest PSD)	5210 (Low Index)	6 + 5	2.576123	60.5	PK-U	32.3	0	-49.58	43.22	-	-	68.2	-24.98	324	324	V
			2.576287	48.78	ADR	32.3	0.17	-49.58	31.67	-	-	-	-	324	324	V
			2.576914	48.65	ADR	32.3	0.17	-49.58	31.54	-	-	-	-	197	221	H
			2.57923	60.04	PK-U	32.3	0	-49.53	42.81	-	-	68.2	-25.39	197	221	H
			10.426151	43.72	ADR	37.6	0.17	-44.39	37.1	-	-	-	-	91	366	H
			10.427178	55.2	PK-U	37.6	0	-44.41	48.39	-	-	68.2	-19.81	91	366	H
			10.427455	43.73	ADR	37.6	0.17	-44.41	37.09	-	-	-	-	55	374	V
			10.427493	55.12	PK-U	37.6	0	-44.41	48.31	-	-	68.2	-19.89	55	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250 (Straddle)	6 + 5	1.814526	50.24	ADR	30.3	0	-50.16	30.38	-	-	-	-	22	349	V
			1.815803	61.83	PK-U	30.3	0	-50.17	41.96	-	-	68.2	-26.24	22	349	V
			1.81646	50.1	ADR	30.3	0	-50.17	30.23	-	-	-	-	18	111	H
			1.81742	61.91	PK-U	30.4	0	-50.16	42.15	-	-	68.2	-26.05	18	111	H
			12.397785	51.28	PK-U	38.8	0	-40.82	49.26	-	-	74	-24.74	41	308	H
			12.397837	39.56	ADR	38.8	0	-40.82	37.54	54	-16.46	-	-	41	308	H
			12.403478	50.77	PK-U	38.8	0	-40.77	48.8	-	-	74	-25.2	163	252	V
			12.403897	39.53	ADR	38.8	0	-40.74	37.59	54	-16.41	-	-	163	252	V
			16.662279	49.03	PK-U	41.4	0	-40.73	49.7	-	-	68.2	-18.5	124	218	V
			16.663119	49.96	PK-U	41.4	0	-40.7	50.66	-	-	68.2	-17.54	99	287	H
			16.663341	37.33	ADR	41.4	0	-40.71	38.02	-	-	-	-	124	218	V
			16.663891	38.14	ADR	41.4	0	-40.73	38.81	-	-	-	-	99	287	H
11be (242T)	5250 (Straddle) (Mid Index)	6 + 5	* 2.80083	57.96	PK-U	32.3	0	-47.25	43.01	-	-	74	-30.99	348	287	H
			* 2.808924	46.31	ADR	32.4	0.1	-47.22	31.59	54	-22.41	-	-	348	287	H
			* 7.260679	55.42	PK-U	35.3	0	-44.39	46.33	-	-	74	-27.67	28	153	H
			* 7.26403	43.57	ADR	35.3	0.1	-44.42	34.55	54	-19.45	-	-	28	153	H
			3.37958	44.25	ADR	32.6	0.1	-45.54	31.41	-	-	-	-	194	221	V
			3.39578	55.92	PK-U	32.6	0	-45.34	43.18	-	-	68.2	-25.02	194	221	V
			7.008333	43.37	ADR	35.5	0.1	-44.33	34.64	-	-	-	-	38	189	V
			7.010626	55	PK-U	35.5	0	-44.43	46.07	-	-	68.2	-22.13	38	189	V
			10.076444	54.6	PK-U	37.3	0	-42.37	49.53	-	-	68.2	-18.67	50	190	H
			10.095359	42.38	ADR	37.3	0.1	-42.84	36.94	-	-	-	-	50	190	H
			10.193513	42.65	ADR	37.3	0.1	-41.23	38.82	-	-	-	-	343	214	V
			10.224411	54.81	PK-U	37.4	0	-41.05	51.16	-	-	68.2	-17.04	343	214	V
11be (52T / Highest PSD)	5250 (Straddle) (Low)	6 + 5	* 2.493351	46.54	PK-U	32.4	0	-26.39	52.55	-	-	74	-21.45	70	371	H
			* 2.488433	34.8	ADR	32.4	0.2	-26.33	41.07	54	-12.93	-	-	299	160	V
			* 11.336712	56.64	PK-U	38.2	0	-44.75	50.09	-	-	74	-23.91	316	376	H
			* 11.339417	45.12	ADR	38.2	0.2	-44.79	38.73	54	-15.27	-	-	316	376	H
			* 8.48897	55.63	PK-U	36	0	-45.47	46.16	-	-	74	-27.84	107	126	V
			* 8.498743	44.48	ADR	36	0.2	-45.4	35.28	54	-18.72	-	-	107	126	V
			* 11.323412	56.34	PK-U	38.2	0	-44.69	49.85	-	-	74	-24.15	333	197	V
			* 11.314029	44.82	ADR	38.2	0.2	-44.52	38.7	54	-15.3	-	-	333	197	V
			2.510393	34.69	ADR	32.4	0.2	-26.41	40.88	-	-	-	-	70	371	H
			2.511002	46.15	PK-U	32.4	0	-26.42	52.13	-	-	68.2	-16.07	299	160	V
			8.514551	44.65	ADR	36	0.2	-45.5	35.35	-	-	-	-	2	267	H
			8.520574	56.21	PK-U	36	0	-45.57	46.64	-	-	68.2	-21.56	2	267	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5180MHz)

LOW CHANNEL RESULTS

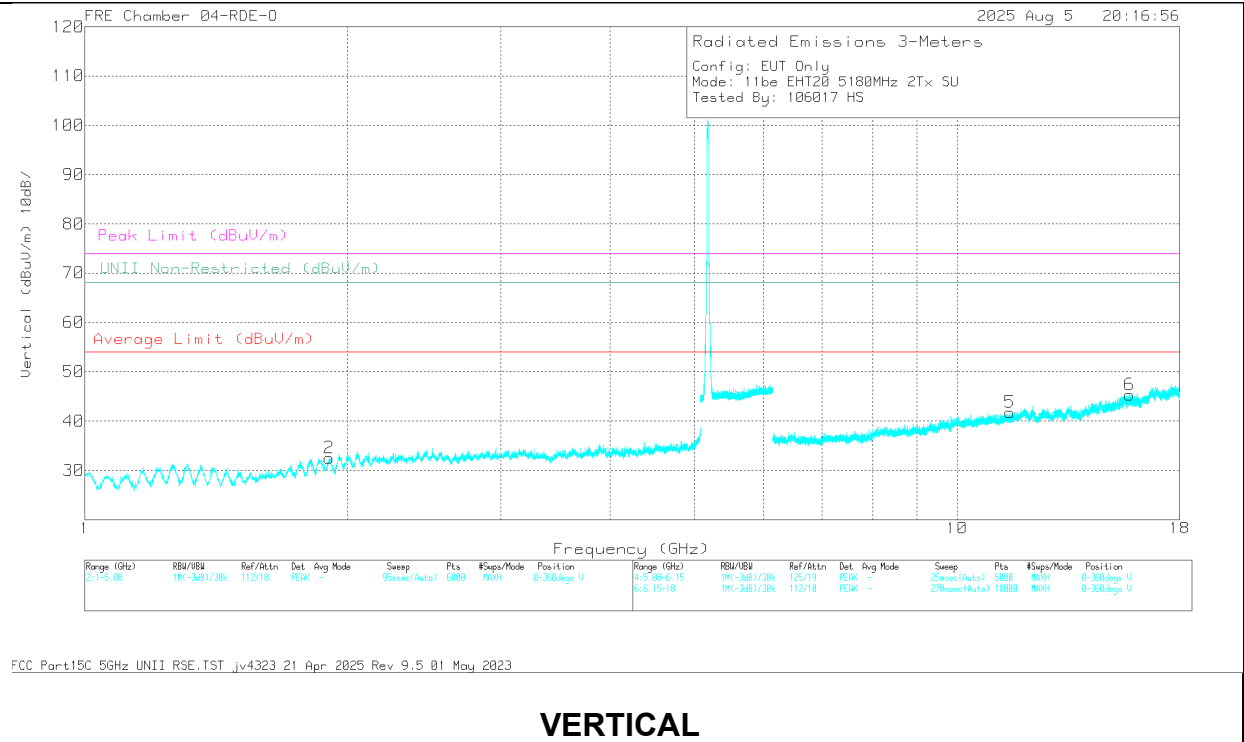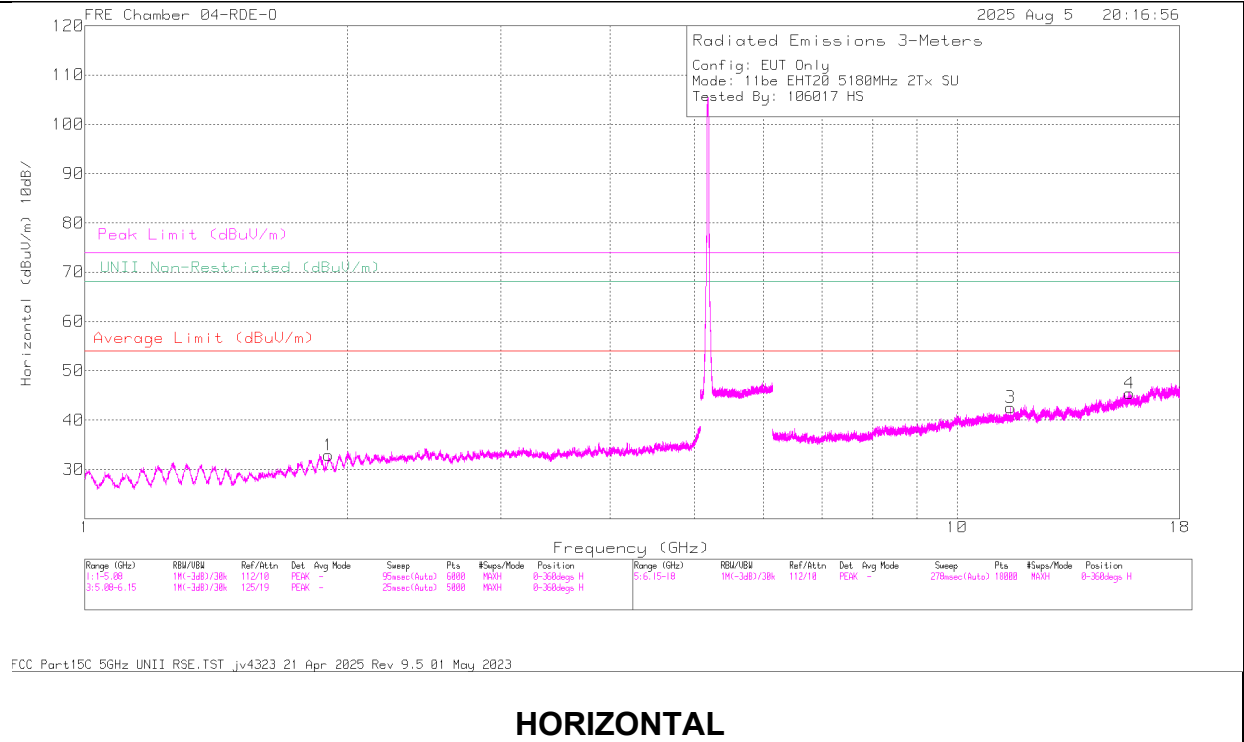

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.520343	52.61	PK-U	38	-40.31	0	50.3	-	-	74	-23.7	360	100	H
6	* 11.520513	41.28	ADR	38	-40.32	0	38.96	54	-15.04	-	-	360	100	H
5	* 15.779382	52.53	PK-U	40.2	-37.99	0	54.74	-	-	74	-19.26	360	100	H
6	* 15.781867	41.14	ADR	40.2	-37.95	0	43.39	54	-10.61	-	-	360	100	H
2	* 11.503078	53.2	PK-U	38	-40.11	0	51.09	-	-	74	-22.91	360	201	V
1	* 11.50366	40.83	ADR	38	-40.1	0	38.73	54	-15.27	-	-	360	201	V
1	* 15.773684	52.26	PK-U	40.2	-38.08	0	54.38	-	-	74	-19.62	360	200	V
2	* 15.77178	41.22	ADR	40.2	-38.1	0	43.32	54	-10.68	-	-	360	200	V
3	1.903115	58.21	PK-U	30.7	-46.4	0	42.51	-	-	68.2	-25.69	360	100	H
4	1.903341	46.54	ADR	30.7	-46.4	0	30.84	-	-	-	-	360	100	H
4	1.906159	46.63	ADR	30.7	-46.44	0	30.89	-	-	-	-	360	201	V
3	1.906279	58.62	PK-U	30.7	-46.44	0	42.88	-	-	68.2	-25.32	360	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


1.1.9. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtz/ Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.35	49.74	Pk	34.5	-23.6	0	60.64	-	-	74	-13.36	216	118	H
			* 5.351755	51.33	Pk	34.5	-23.7	0	62.13	-	-	74	-11.87	216	118	H
			* 5.35	33.36	RMS	34.5	-23.6	0	44.26	54	-9.74	-	-	216	118	H
			* 5.350402	34.16	RMS	34.5	-23.7	0	44.96	54	-9.04	-	-	216	118	H
			* 5.35	53.29	Pk	34.5	-23.6	0	64.19	-	-	74	-9.81	357	113	V
			* 5.350052	54.48	Pk	34.5	-23.6	0	65.38	-	-	74	-8.62	357	113	V
		5	* 5.35	36.1	RMS	34.5	-23.6	0	47	54	-7	-	-	357	113	V
			* 5.350075	37.61	RMS	34.5	-23.6	0	48.51	54	-5.49	-	-	357	113	V
			* 5.35	68.86	Pk	34.8	-38.22	0	65.44	-	-	74	-8.56	100	183	H
			* 5.350799	70.86	Pk	34.9	-38.19	0	67.57	-	-	74	-6.43	100	183	H
			* 5.35	53.59	RMS	34.8	-38.22	0	50.17	54	-3.83	-	-	100	183	H
			* 5.350309	54.39	RMS	34.8	-38.21	0	50.98	54	-3.02	-	-	100	183	H
			* 5.35	66.88	Pk	34.8	-38.22	0	63.46	-	-	74	-10.54	124	241	V
			* 5.351125	69.57	Pk	34.9	-38.18	0	66.29	-	-	74	-7.71	124	241	V
			* 5.35	52.67	RMS	34.8	-38.22	0	49.25	54	-4.75	-	-	124	241	V
			* 5.350355	53.44	RMS	34.8	-38.21	0	50.03	54	-3.97	-	-	124	241	V
HT40	5310	6	5.35	68.82	Pk	34.4	-38.18	0	65.04	-	-	74	-8.96	355	125	H
			5.35	50.69	RMS	34.4	-38.18	0	46.91	54	-7.09	-	-	355	125	H
			5.350005	50.91	RMS	34.4	-38.18	0	47.13	54	-6.87	-	-	355	125	H
			5.351545	69.53	Pk	34.4	-38.25	0	65.68	-	-	74	-8.32	355	125	H
			5.35	69.13	Pk	34.4	-38.18	0	65.35	-	-	74	-8.65	341	272	V
			5.35	52.18	RMS	34.4	-38.18	0	48.4	54	-5.6	-	-	341	272	V
		5	5.350145	52.98	RMS	34.4	-38.19	0	49.19	54	-4.81	-	-	341	272	V
			5.353015	72.43	Pk	34.4	-38.25	0	68.58	-	-	74	-5.42	341	272	V
			* 5.350	67.1	Pk	34.6	-35.89	0	65.81	-	-	74	-8.19	137	116	H
			* 5.350052	69.94	Pk	34.6	-35.89	0	68.65	-	-	74	-5.35	137	116	H
			* 5.350	49.45	RMS	34.6	-35.89	0	48.16	54	-5.84	-	-	138	116	H
			* 5.350659	52.39	RMS	34.6	-35.92	0	51.07	54	-2.93	-	-	138	116	H
		5	* 5.350	64.24	Pk	34.6	-35.89	0	62.95	-	-	74	-11.05	117	157	V
			* 5.350635	66.6	Pk	34.6	-35.92	0	65.28	-	-	74	-8.72	117	157	V
			* 5.350	48.01	RMS	34.6	-35.89	0	46.72	54	-7.28	-	-	117	157	V
			* 5.353832	49.6	RMS	34.6	-36.05	0	48.15	54	-5.85	-	-	117	157	V
VHT80	5290	6	5.35	64.78	Pk	34.5	-36.55	0	62.73	-	-	74	-11.27	191	196	H
			5.35	48.93	RMS	34.5	-36.55	0	46.88	54	-7.12	-	-	191	196	H
			5.350355	68.85	RMS	34.5	-36.56	0	66.79	-	-	74	-7.21	191	196	H
			5.354019	49.62	Pk	34.5	-36.56	0	47.56	54	-6.44	-	-	191	196	H
			5.35	66.3	Pk	34.5	-36.55	0	64.25	-	-	74	-9.75	166	126	V
			5.35	50.54	RMS	34.5	-36.55	0	48.49	54	-5.51	-	-	166	126	V
		5	5.350192	51.9	RMS	34.5	-36.56	0	49.84	54	-4.16	-	-	166	126	V
			5.362022	70.64	Pk	34.6	-36.49	0	68.75	-	-	74	-5.25	166	126	V
			* 5.35	66.33	Pk	34.5	-35	0	65.83	-	-	74	-8.17	349	112	H
			* 5.352833	69.77	Pk	34.5	-35	0	69.27	-	-	74	-4.73	349	112	H
			* 5.35	50.01	RMS	34.5	-35	0	49.51	54	-4.49	-	-	349	112	H
			* 5.350917	51.29	RMS	34.5	-35	0	50.79	54	-3.21	-	-	349	112	H
		5	* 5.35	66.21	Pk	34.5	-35	0	65.71	-	-	74	-8.29	346	194	V
			* 5.352833	67.52	Pk	34.5	-35	0	67.02	-	-	74	-6.98	346	194	V
			* 5.35	48.16	RMS	34.5	-35	0	47.66	54	-6.34	-	-	346	194	V
			* 5.35026	50.04	RMS	34.5	-35	0	49.54	54	-4.46	-	-	346	194	V
VHT160	5250 (Upper)	6	* 5.35	42.05	Pk	34.5	-23.6	0	52.95	-	-	74	-21.05	246	101	H
			* 5.402458	53.61	Pk	34.6	-24.1	0	64.11	-	-	74	-9.89	246	101	H
			* 5.35	29.29	RMS	34.5	-23.6	0.11	40.3	54	-13.7	-	-	246	101	H
			* 5.401245	33.58	RMS	34.6	-24.1	0.11	44.19	54	-9.81	-	-	246	101	H
			* 5.35	46.41	Pk	34.5	-23.6	0	57.31	-	-	74	-16.69	359	101	V
			* 5.401455	58.94	Pk	34.6	-24.1	0	69.44	-	-	74	-4.56	359	101	V
		5	* 5.35	30.1	RMS	34.5	-23.6	0.11	41.11	54	-12.89	-	-	359	101	V
			* 5.403251	38.14	RMS	34.6	-24	0.11	48.85	54	-5.15	-	-	359	101	V
			* 5.35	45.74	Pk	34.5	-23.6	0	56.64	-	-	74	-17.36	267	136	H
			* 5.402971	58.08	Pk	34.6	-24.1	0	68.58	-	-	74	-5.42	267	136	H
			* 5.35	32.08	RMS	34.5	-23.6	0.11	43.09	54	-10.91	-	-	267	136	H
			* 5.403088	36.14	RMS	34.6	-24	0.11	46.85	54	-7.15	-	-	267	136	H
		5	* 5.35	41.71	Pk	34.5	-23.6	0	52.61	-	-	74	-21.39	242	182	V
			* 5.402271	53.63	Pk	34.6	-24.1	0	64.13	-	-	74	-9.87	242	182	V
			* 5.35	30.39	RMS	34.5	-23.6	0.11	41.4	54	-12.6	-	-	242	182	V
			* 5.396695	32.62	RMS	34.6	-24.1	0.11	43.23	54	-10.77	-	-	242	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

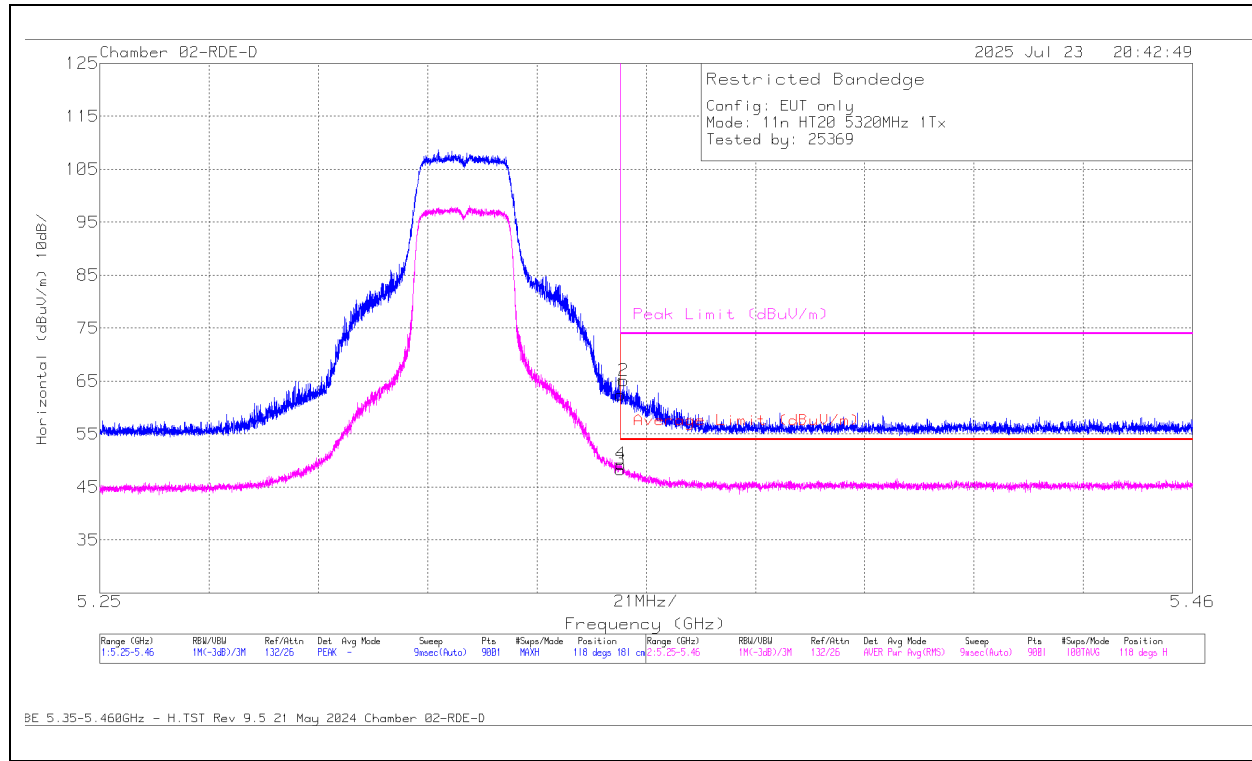BANDEDGE (HIGH CHANNEL / 5320MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	49.74	Pk	34.5	0	-23.6	60.64	-	-	74	-13.36	216	118	H
2	* 5.351755	51.33	Pk	34.5	0	-23.7	62.13	-	-	74	-11.87	216	118	H
3	* 5.35	33.36	RMS	34.5	0	-23.6	44.26	54	-9.74	-	-	216	118	H
4	* 5.350402	34.16	RMS	34.5	0	-23.7	44.96	54	-9.04	-	-	216	118	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz)

VERTICAL RESULT

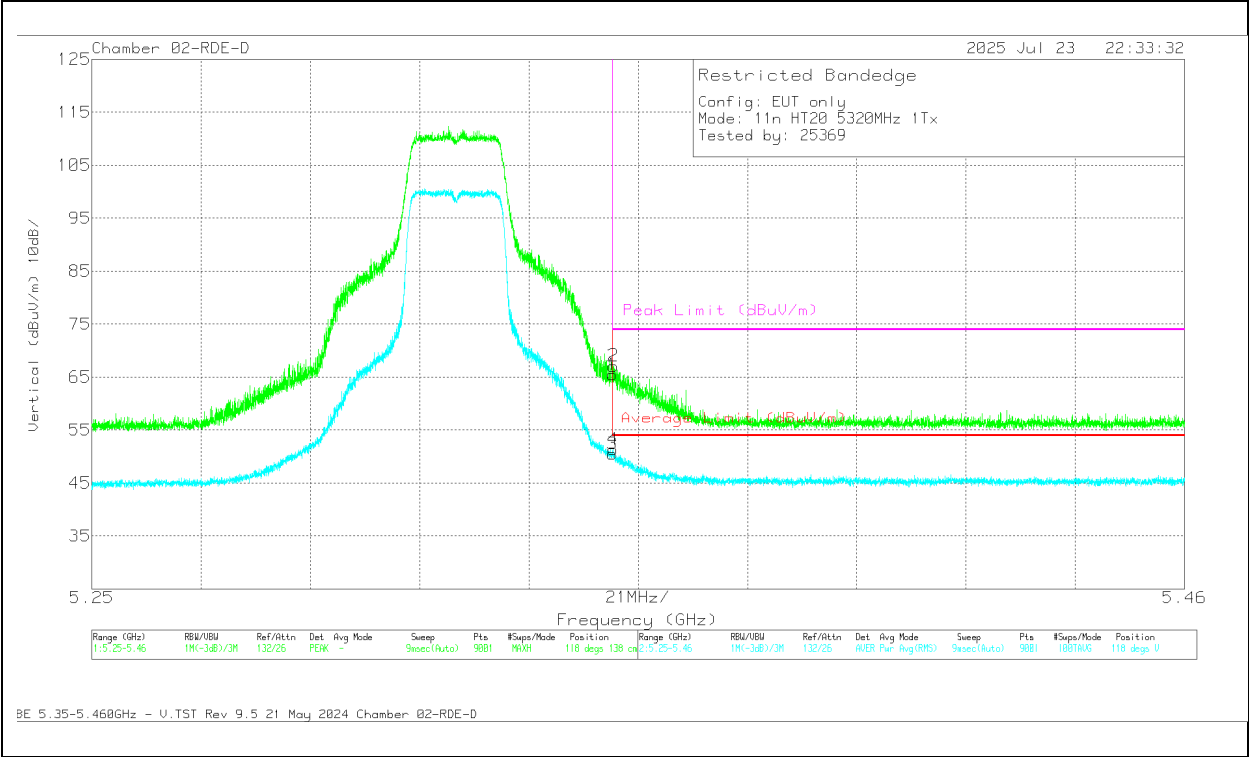

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	53.29	PK	34.5	0	-23.6	64.19	-	-	74	-9.81	357	113	V
2	* 5.350052	54.48	PK	34.5	0	-23.6	65.38	-	-	74	-8.62	357	113	V
3	* 5.35	36.1	RMS	34.5	0	-23.6	47	54	-7	-	-	357	113	V
4	* 5.350075	37.61	RMS	34.5	0	-23.6	48.51	54	-5.49	-	-	357	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection


1.1.10. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6 + 5	* 5.35	67.18	Pk	34.8	-38.22	0	63.76	-	-	74	-10.24	332	143	H
			* 5.350192	69.78	Pk	34.8	-38.21	0	66.37	-	-	74	-7.63	332	143	H
			* 5.35	53.58	RMS	34.8	-38.22	0	50.16	54	-3.84	-	-	332	143	H
			* 5.350309	53.99	RMS	34.8	-38.21	0	50.58	54	-3.42	-	-	332	143	H
			* 5.35	68.94	Pk	34.8	-38.22	0	65.52	-	-	74	-8.48	223	124	V
			* 5.350169	71.21	Pk	34.8	-38.21	0	67.8	-	-	74	-6.2	223	124	V
			* 5.35	53.86	RMS	34.8	-38.22	0	50.44	54	-3.56	-	-	223	124	V
			* 5.350495	54.79	RMS	34.8	-38.2	0	51.39	54	-2.61	-	-	223	124	V
HT40	5310	6 + 5	5.35	65.16	Pk	34.4	-38.18	0	61.38	-	-	74	-12.62	331	105	H
			5.35	48.29	RMS	34.4	-38.18	0	44.51	54	-9.49	-	-	331	105	H
			5.350379	50.02	RMS	34.4	-38.21	0	46.21	54	-7.79	-	-	331	105	H
			5.353039	68.06	Pk	34.4	-38.25	0	64.21	-	-	74	-9.79	331	105	H
			5.35	67.54	Pk	34.4	-38.18	0	63.76	-	-	74	-10.24	352	103	V
			5.35	53.5	RMS	34.4	-38.18	0	49.72	54	-4.28	-	-	352	103	V
			5.350775	54.81	RMS	34.4	-38.24	0	50.97	54	-3.03	-	-	352	103	V
			5.350962	73.29	Pk	34.4	-38.26	0	69.43	-	-	74	-4.57	352	103	V
VHT80	5290	6 + 5	* 5.35	70.09	Pk	34.2	-39.7	0	64.59	-	-	74	-9.41	269	144	H
			* 5.363748	72.21	Pk	34.3	-39.63	0	66.88	-	-	74	-7.12	269	144	H
			* 5.35	48.4	RMS	34.2	-39.7	0	42.9	54	-11.1	-	-	269	144	H
			* 5.358265	51.37	RMS	34.3	-39.7	0	45.97	54	-8.03	-	-	269	144	H
			* 5.35	73.1	Pk	34.2	-39.7	0	67.6	-	-	74	-6.4	156	114	V
			* 5.360435	74.39	Pk	34.3	-39.6	0	69.09	-	-	74	-4.91	156	114	V
			* 5.35	54.93	RMS	34.2	-39.7	0	49.43	54	-4.57	-	-	156	114	V
			* 5.350682	56.13	RMS	34.2	-39.7	0	50.63	54	-3.37	-	-	156	114	V
VHT160	5250 (Upper)	6 + 5	* 5.35	41.05	Pk	34.3	-16.9	0	58.45	-	-	74	-15.55	60	167	H
			* 5.400403	51.61	Pk	34.4	-16.6	0	69.41	-	-	74	-4.59	60	167	H
			* 5.35	29	RMS	34.3	-16.9	0.11	46.51	54	-7.49	-	-	60	167	H
			* 5.400771	30.55	RMS	34.4	-16.6	0.11	48.46	54	-5.54	-	-	60	167	H
			* 5.35	39.73	Pk	34.3	-16.9	0	57.13	-	-	74	-16.87	106	170	V
			* 5.399957	48.06	Pk	34.4	-16.7	0	65.76	-	-	74	-8.24	106	170	V
			* 5.35	28.51	RMS	34.3	-16.9	0.11	46.02	54	-7.98	-	-	106	170	V
			* 5.399957	29.01	RMS	34.4	-16.7	0.11	46.82	54	-7.18	-	-	106	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

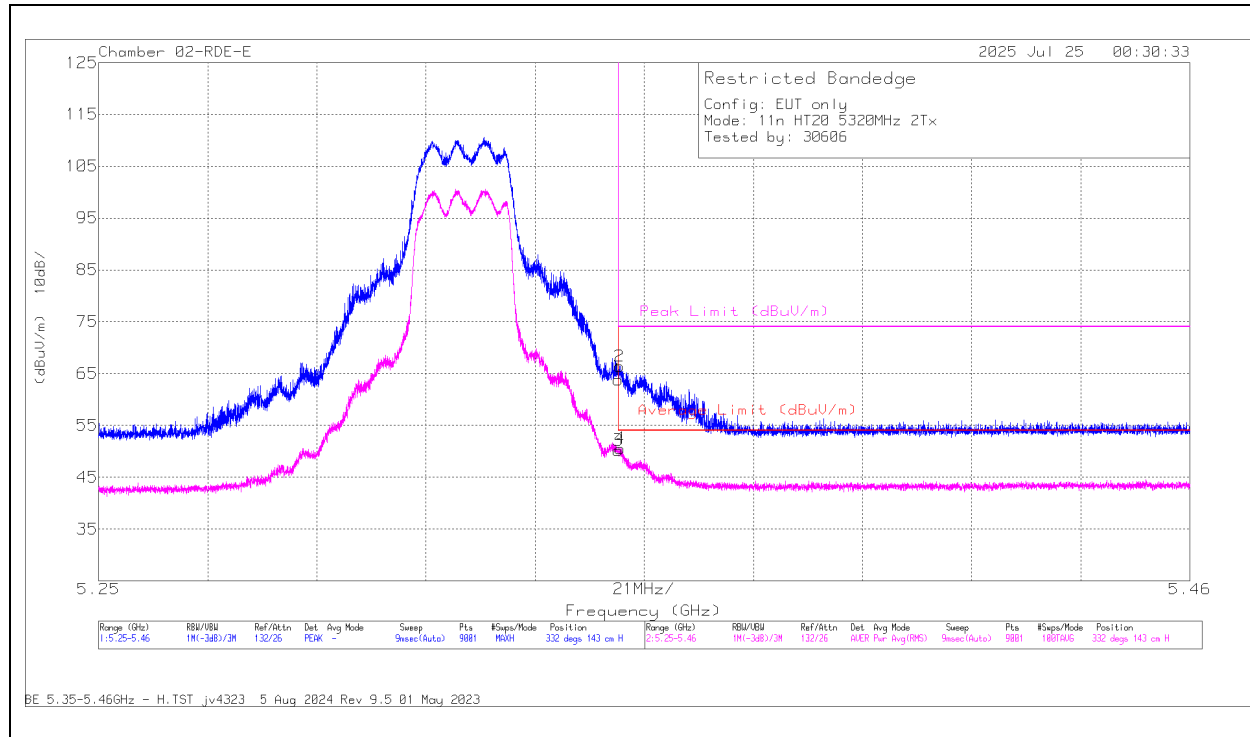BANDEDGE (HIGH CHANNEL / 5320MHz)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	67.18	PK	34.8	0	-38.22	63.76	-	-	74	-10.24	332	143	H
2	* 5.350192	69.78	PK	34.8	0	-38.21	66.37	-	-	74	-7.63	332	143	H
3	* 5.35	53.58	RMS	34.8	0	-38.22	50.16	54	-3.84	-	-	332	143	H
4	* 5.350309	53.99	RMS	34.8	0	-38.21	50.58	54	-3.42	-	-	332	143	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz)

VERTICAL RESULT

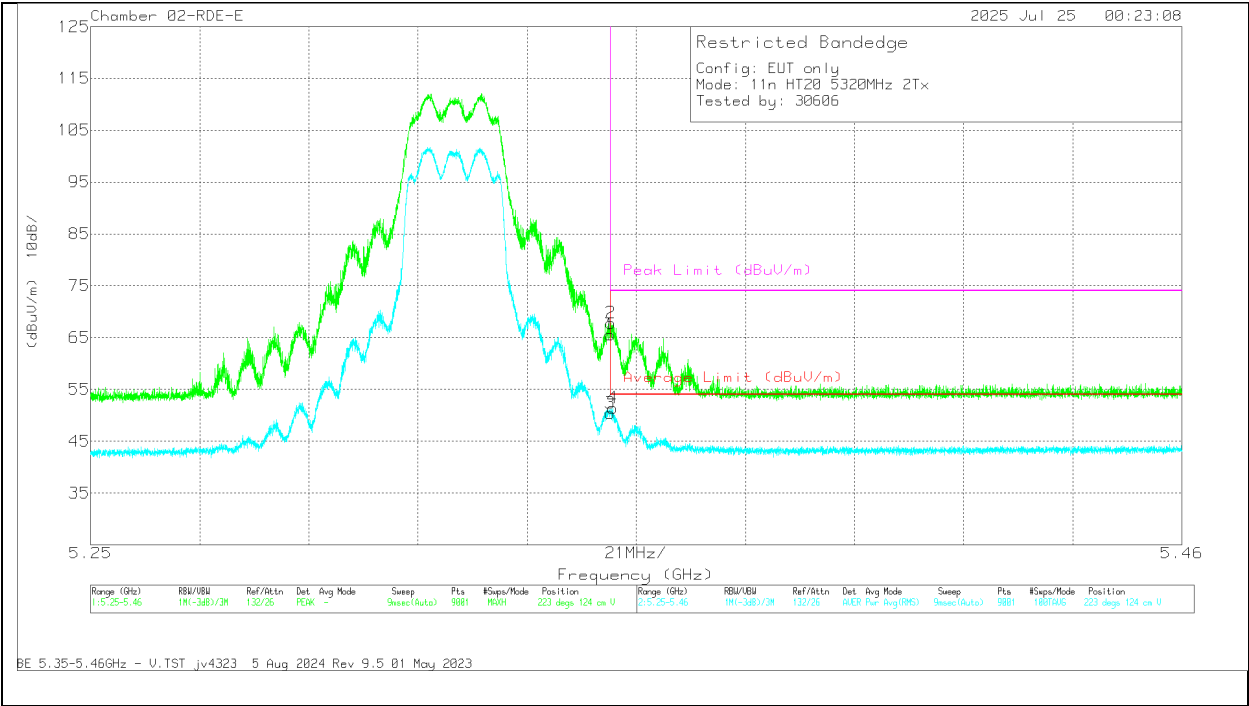

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	68.94	PK	34.8	0	-38.22	65.52	-	-	74	-8.48	223	124	V
2	* 5.350169	71.21	PK	34.8	0	-38.21	67.8	-	-	74	-6.2	223	124	V
3	* 5.35	53.86	RMS	34.8	0	-38.22	50.44	54	-3.56	-	-	223	124	V
4	* 5.350495	54.79	RMS	34.8	0	-38.2	51.39	54	-2.61	-	-	223	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection


1.1.11. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6	* 5.35	67.88	Pk	34.8	-38.22	0	64.46	-	-	74	-9.54	54	398	H
			* 5.350005	69.16	Pk	34.8	-38.22	0	65.74	-	-	74	-8.26	54	398	H
			* 5.35	49.53	RMS	34.8	-38.22	0	46.11	54	-7.89	-	-	54	398	H
			* 5.351569	50.81	RMS	34.9	-38.18	0	47.53	54	-6.47	-	-	54	398	H
			* 5.35	70.33	Pk	34.8	-38.22	0	66.91	-	-	74	-7.09	57	398	V
			* 5.350099	72.88	Pk	34.8	-38.22	0	69.46	-	-	74	-4.54	57	398	V
		5	* 5.35	53.05	RMS	34.8	-38.22	0	49.63	54	-4.37	-	-	57	398	V
			* 5.350215	53.61	RMS	34.8	-38.21	0	50.2	54	-3.8	-	-	57	398	V
			* 5.350	62.6	Pk	34.6	-30.5	0	66.7	-	-	74	-7.3	152	162	H
			* 5.350339	64.29	Pk	34.6	-30.5	0	68.39	-	-	74	-5.61	152	162	H
			* 5.350	45.58	RMS	34.6	-30.5	0	49.68	54	-4.32	-	-	152	162	H
			* 5.350523	46.66	RMS	34.6	-30.5	0	50.76	54	-3.24	-	-	152	162	H
			* 5.350	58.46	Pk	34.6	-30.5	0	62.56	-	-	74	-11.44	109	232	V
			* 5.350024	60.76	Pk	34.6	-30.5	0	64.86	-	-	74	-9.14	109	232	V
			* 5.350	43.48	RMS	34.6	-30.5	0	47.58	54	-6.42	-	-	109	232	V
			* 5.350103	43.93	RMS	34.6	-30.5	0	48.03	54	-5.97	-	-	109	232	V
EHT40 (SU Mode)	5310	6	* 5.35	54.85	Pk	34.6	-23.03	0	66.42	-	-	74	-7.58	326	195	H
			* 5.350542	57.51	Pk	34.6	-23.05	0	69.06	-	-	74	-4.94	326	195	H
			* 5.35	36.26	RMS	34.6	-23.03	0	47.83	54	-6.17	-	-	326	195	H
			* 5.350402	36.97	RMS	34.6	-23.04	0	48.53	54	-5.47	-	-	326	195	H
			* 5.35	46.9	Pk	34.6	-23.03	0	58.47	-	-	74	-15.23	62	231	V
			* 5.352409	49.97	Pk	34.6	-23.09	0	61.48	-	-	74	-12.52	62	231	V
		5	* 5.35	30.97	RMS	34.6	-23.03	0	42.54	54	-11.46	-	-	62	231	V
			* 5.354695	31.97	RMS	34.6	-23.13	0	43.44	54	-10.56	-	-	62	231	V
			* 5.35	45.81	Pk	34.3	-16.9	0	63.21	-	-	74	-10.79	231	140	H
			* 5.351415	51.11	Pk	34.3	-16.8	0	68.61	-	-	74	-5.39	231	140	H
			* 5.35	30.5	RMS	34.3	-16.9	0	47.9	54	-6.1	-	-	231	140	H
			* 5.353358	31.28	RMS	34.3	-16.8	0	48.78	54	-5.22	-	-	231	140	H
		5	* 5.35	45.35	Pk	34.3	-16.9	0	62.75	-	-	74	-11.25	186	116	V
			* 5.350076	49.13	Pk	34.3	-16.9	0	66.53	-	-	74	-7.47	186	116	V
			* 5.35	29.18	RMS	34.3	-16.9	0	46.58	54	-7.42	-	-	186	116	V
			* 5.354723	29.99	RMS	34.3	-16.8	0	47.49	54	-6.51	-	-	186	116	V
			* 5.35	49.13	Pk	34.3	-16.9	0	66.53	-	-	74	-7.47	246	171	H
			* 5.350129	51.48	Pk	34.3	-16.9	0	68.88	-	-	74	-5.12	246	171	H
EHT80 (SU Mode)	5290	6	* 5.35	32.89	RMS	34.3	-16.9	0	50.29	54	-3.71	-	-	246	171	H
			* 5.35131	33.78	RMS	34.3	-16.8	0	51.28	54	-2.72	-	-	246	171	H
			* 5.35	45.72	Pk	34.3	-16.9	0	63.12	-	-	74	-10.88	311	148	V
			* 5.35643	48.95	Pk	34.3	-16.8	0	66.45	-	-	74	-7.55	311	148	V
			* 5.35	30.67	RMS	34.3	-16.9	0	48.07	54	-5.93	-	-	311	148	V
			* 5.352019	31.88	RMS	34.3	-16.8	0	49.38	54	-4.62	-	-	311	148	V
		5	* 5.35	54.99	Pk	34.5	-23.6	0	65.89	-	-	74	-8.11	273	135	H
			* 5.361158	58.22	Pk	34.5	-23.8	0	68.92	-	-	74	-5.08	273	135	H
			* 5.35	35.64	RMS	34.5	-23.6	0	46.54	54	-7.46	-	-	273	135	H
			* 5.351615	37.56	RMS	34.5	-23.7	0	48.36	54	-5.64	-	-	273	135	H
			* 5.35	50.75	Pk	34.5	-23.6	0	61.65	-	-	74	-12.35	244	192	V
			* 5.361508	53.99	Pk	34.5	-23.8	0	64.69	-	-	74	-9.31	244	192	V
		5	* 5.35	32.49	RMS	34.5	-23.6	0	43.39	54	-10.61	-	-	244	192	V
			* 5.354112	34.08	RMS	34.5	-23.7	0	44.88	54	-9.12	-	-	244	192	V
			* 5.35	50.41	Pk	34.4	-24.18	0	60.63	-	-	74	-13.37	38	159	H
			* 5.406448	54.22	Pk	34.4	-23.95	0	64.67	-	-	74	-9.33	38	159	H
			* 5.35	35.6	RMS	34.4	-24.18	0.14	45.96	54	-8.04	-	-	38	159	H
			* 5.398118	37.06	RMS	34.4	-23.95	0.14	47.65	54	-6.35	-	-	38	159	H
EHT160 (SU Mode)	5250 (Upper)	6	* 5.35	54.29	Pk	34.4	-24.18	0	64.51	-	-	74	-9.49	355	112	V
			* 5.350915	58.15	Pk	34.4	-24.08	0	68.47	-	-	74	-5.53	355	112	V
			* 5.35	38.84	RMS	34.4	-24.18	0.14	49.2	54	-4.8	-	-	355	112	V
			* 5.397628	40.26	RMS	34.4	-23.96	0.14	50.84	54	-3.16	-	-	355	112	V
			* 5.35	54.1	Pk	34.5	-23.6	0	65	-	-	74	-9	278	124	H
			* 5.355139	58.41	Pk	34.5	-23.7	0	69.21	-	-	74	-4.79	278	124	H
		5	* 5.35	37.07	RMS	34.5	-23.6	0.14	48.11	54	-5.89	-	-	278	124	H
			* 5.399005	40.34	RMS	34.6	-24.1	0.14	50.98	54	-3.02	-	-	278	124	H
			* 5.35	53.65	Pk	34.5	-23.6	0	64.55	-	-	74	-9.45	248	207	V
			* 5.350075	55.4	Pk	34.5	-23.6	0	66.3	-	-	74	-7.7	248	207	V
			* 5.35	35.27	RMS	34.5	-23.6	0.14	46.31	54	-7.69	-	-	248	207	V
			* 5.358148	36.9	RMS	34.5	-23.8	0.14	47.74	54	-6.26	-	-	248	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

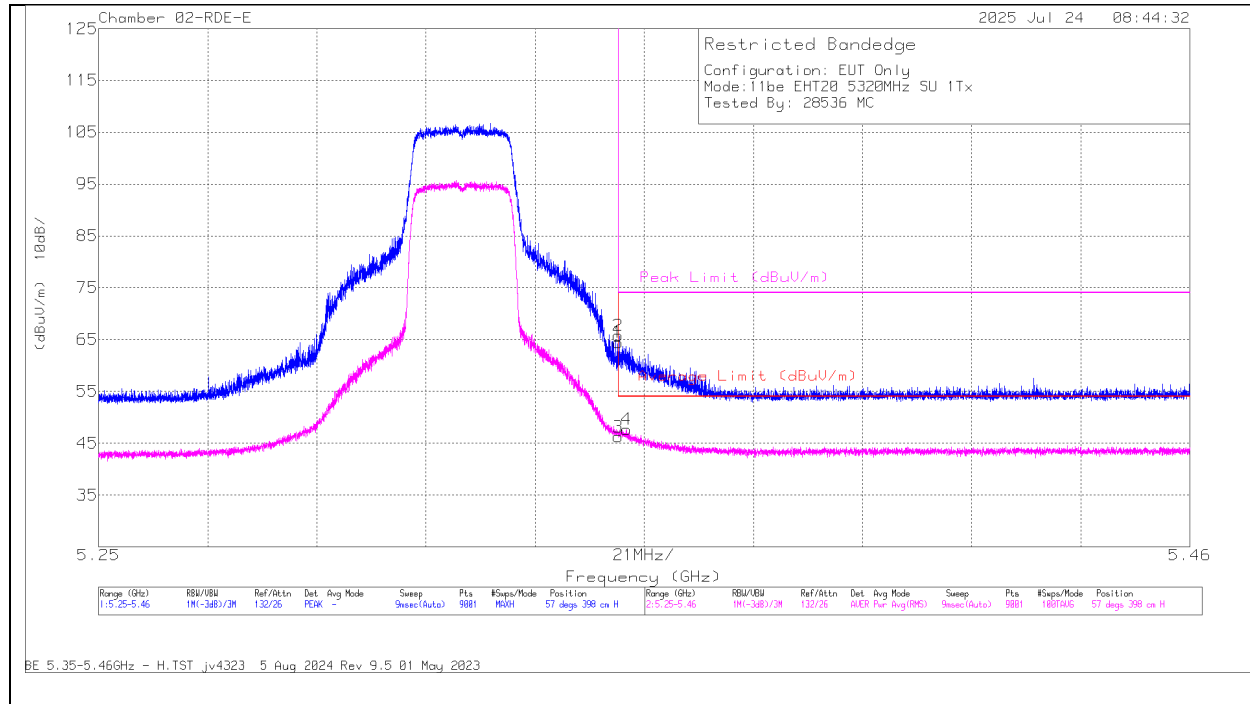
BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	67.88	PK	34.8	-38.22	0	64.46	-	-	74	-8.54	54	398	H
2	* 5.350005	69.16	PK	34.8	-38.22	0	65.74	-	-	74	-8.26	54	398	H
3	* 5.35	49.53	RMS	34.8	-38.22	0	46.11	54	-7.89	-	-	54	398	H
4	* 5.351569	50.81	RMS	34.9	-38.18	0	47.53	54	-6.47	-	-	54	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

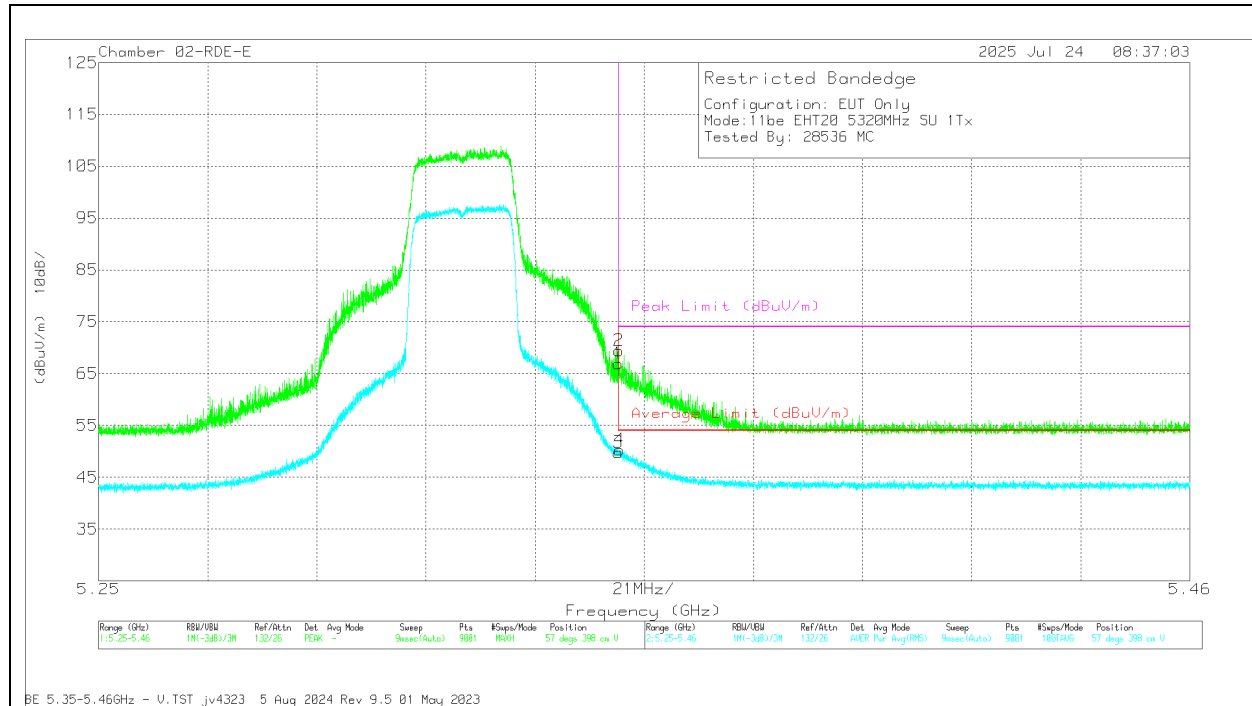BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	Amp/Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	70.33	Pk	34.8	-38.22	0	66.91	-	-	74	-7.09	57	398	V
2	* 5.350099	72.88	Pk	34.8	-38.22	0	69.46	-	-	74	-4.54	57	398	V
3	* 5.35	53.05	RMS	34.8	-38.22	0	49.63	54	-4.37	-	-	57	398	V
4	* 5.350215	53.61	RMS	34.8	-38.21	0	50.2	54	-3.8	-	-	57	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.1.12. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 40)	5320	6	* 5.35	58.07	Pk	34.6	-38	0	54.67	-	-	74	-19.33	248	369	H
			* 5.351009	62.64	Pk	34.6	-38	0	59.24	-	-	74	-14.76	248	369	H
			* 5.35	46.59	RMS	34.6	-38	0	43.19	54	-10.81	-	-	248	369	H
			* 5.432184	47.5	RMS	34.6	-37.8	0	44.3	54	-9.7	-	-	248	369	H
			* 5.35	62.92	Pk	34.6	-38	0	59.52	-	-	74	-14.48	235	316	V
			* 5.362978	67.84	Pk	34.6	-37.9	0	64.54	-	-	74	-9.46	235	316	V
		5	* 5.35	49.96	RMS	34.6	-38	0	46.56	54	-7.44	-	-	235	316	V
			* 5.363025	54.42	RMS	34.6	-37.9	0	51.12	54	-2.88	-	-	235	316	V
			5.35	57.74	Pk	34.5	-36.55	0	55.69	-	-	74	-18.31	276	160	H
			5.35	45.32	RMS	34.5	-36.55	0	43.27	54	-10.73	-	-	276	160	H
			5.359198	46.74	RMS	34.6	-36.57	0	44.77	54	-9.23	-	-	276	160	H
			5.426724	58.64	Pk	34.6	-36.53	0	56.71	-	-	74	-17.29	276	160	H
			5.35	57.44	Pk	34.5	-36.55	0	55.39	-	-	74	-18.61	163	109	V
			5.35	45.61	RMS	34.5	-36.55	0	43.56	54	-10.44	-	-	163	109	V
			5.383278	58.83	Pk	34.6	-36.61	0	56.82	-	-	74	-17.18	163	109	V
			5.383395	46.84	RMS	34.6	-36.62	0	44.82	54	-9.18	-	-	163	109	V
EHT40 (242T / Index 62)	5310	6	* 5.350	43.54	Pk	34.4	-24.18	0	53.76	-	-	74	-20.24	357	189	H
			* 5.394291	46.91	Pk	34.4	-24.02	0	57.29	-	-	74	-16.71	357	189	H
			* 5.350	33.24	RMS	34.4	-24.18	0	43.46	54	-10.54	-	-	357	189	H
			* 5.413074	33.83	RMS	34.4	-23.9	0	44.33	54	-9.67	-	-	357	189	H
			* 5.350	42.69	Pk	34.4	-24.18	0	52.91	-	-	74	-21.09	262	388	V
			* 5.449264	46.1	Pk	34.5	-24.03	0	56.57	-	-	74	-17.43	262	388	V
		5	* 5.350	32.38	RMS	34.4	-24.18	0	42.6	54	-11.4	-	-	262	388	V
			* 5.430761	33.53	RMS	34.5	-23.99	0	44.04	54	-9.96	-	-	262	388	V
			5.35	64.72	Pk	34.6	-37.99	0	61.33	-	-	74	-12.67	85	141	H
			5.35	50.09	RMS	34.6	-37.99	0	46.7	54	-7.3	-	-	85	141	H
			5.350075	51.21	RMS	34.6	-37.99	0	47.82	54	-6.18	-	-	85	141	H
			5.350122	70.04	Pk	34.6	-37.99	0	66.65	-	-	74	-7.35	85	141	H
			5.35	62.58	Pk	34.6	-37.99	0	59.19	-	-	74	-14.81	149	129	V
			5.35	47.66	RMS	34.6	-37.99	0	44.27	54	-9.73	-	-	149	129	V
			5.350215	64.75	Pk	34.6	-38	0	61.35	-	-	74	-12.65	149	129	V
			5.350239	49.15	RMS	34.6	-38	0	45.75	54	-8.25	-	-	149	129	V
EHT40 ((106+26)T / Index 85)	5310	6	* 5.350	50.65	Pk	34.4	-24.18	0	60.87	-	-	74	-13.13	357	190	H
			* 5.350472	52.39	Pk	34.4	-24.13	0	62.66	-	-	74	-11.34	357	190	H
			* 5.350	32.63	RMS	34.4	-24.18	0	42.85	54	-11.15	-	-	357	190	H
			* 5.443337	33.76	RMS	34.5	-24.01	0	44.25	54	-9.75	-	-	357	190	H
			* 5.350	43.69	Pk	34.4	-24.18	0	53.91	-	-	74	-20.09	262	387	V
			* 5.351102	46.83	Pk	34.4	-24.08	0	57.15	-	-	74	-16.85	262	387	V
		5	* 5.350	32.05	RMS	34.4	-24.18	0	42.27	54	-11.73	-	-	262	387	V
			* 5.357192	33.68	RMS	34.4	-24.14	0	43.94	54	-10.06	-	-	262	387	V
			5.35	64.03	Pk	34.6	-37.99	0	60.64	-	-	74	-13.36	149	141	H
			5.35	48.01	RMS	34.6	-37.99	0	44.62	54	-9.38	-	-	149	141	H
			5.350029	66.79	Pk	34.6	-37.99	0	63.4	-	-	74	-10.6	149	141	H
			5.350985	48.32	RMS	34.6	-38.02	0	44.9	54	-9.1	-	-	149	141	H
			5.35	61.88	Pk	34.6	-37.99	0	58.49	-	-	74	-15.51	132	127	V
			5.35	46.83	RMS	34.6	-37.99	0	43.44	54	-10.56	-	-	132	127	V
			5.350122	64.04	Pk	34.6	-37.99	0	60.65	-	-	74	-13.35	132	127	V
			5.400825	47.28	RMS	34.7	-37.69	0	44.29	54	-9.71	-	-	132	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 66)	5290	6	* 5.35	68.4	Pk	34.4	-38.18	0	64.62	-	-	74	-9.38	353	177	H
			* 5.35	49.22	RMS	34.4	-38.18	0	45.44	54	-8.56	-	-	353	177	H
			* 5.350029	68.67	Pk	34.4	-38.18	0	64.89	-	-	74	-9.11	353	177	H
			* 5.350332	50.04	RMS	34.4	-38.21	0	46.23	54	-7.77	-	-	353	177	H
			* 5.35	72.44	Pk	34.4	-38.18	0	68.66	-	-	74	-5.34	355	131	V
			* 5.35	51.06	RMS	34.4	-38.18	0	47.28	54	-6.72	-	-	355	131	V
		5	* 5.350005	72.92	Pk	34.4	-38.18	0	69.14	-	-	74	-4.86	355	131	V
			* 5.352595	53.68	RMS	34.4	-38.25	0	49.83	54	-4.17	-	-	355	131	V
			* 5.350	50.36	Pk	34.6	-23.03	0	61.93	-	-	74	-12.07	82	401	H
			* 5.351335	51.77	Pk	34.6	-23.07	0	63.3	-	-	74	-10.7	82	401	H
			* 5.350	34.18	RMS	34.6	-23.03	0	45.75	54	-8.25	-	-	82	401	H
			* 5.350262	35.19	RMS	34.6	-23.04	0	46.75	54	-7.25	-	-	82	401	H
			* 5.350	49.8	Pk	34.6	-23.03	0	61.37	-	-	74	-12.63	30	401	V
			* 5.351639	52.03	Pk	34.6	-23.08	0	63.55	-	-	74	-10.45	30	401	V
			* 5.350	34.52	RMS	34.6	-23.03	0	46.09	54	-7.91	-	-	30	401	V
			* 5.350029	35.46	RMS	34.6	-23.03	0	47.03	54	-6.97	-	-	30	401	V
EHT80 (52T / Index 52)	5290	6	* 5.35	58.83	Pk	34.5	-39.05	0	54.28	-	-	74	-19.72	209	103	H
			* 5.350192	61.76	Pk	34.5	-39.04	0	57.22	-	-	74	-16.78	209	103	H
			* 5.35	46.94	RMS	34.5	-39.05	0.16	42.55	54	-11.45	-	-	209	103	H
			* 5.363095	48.52	RMS	34.5	-38.99	0.16	44.19	54	-9.81	-	-	209	103	H
			* 5.35	60.64	Pk	34.5	-39.05	0	56.09	-	-	74	-17.91	191	214	V
			* 5.35	47.61	RMS	34.5	-39.05	0.16	43.22	54	-10.78	-	-	191	214	V
		5	* 5.350215	62.44	Pk	34.5	-39.04	0	57.9	-	-	74	-16.1	191	214	V
			* 5.442427	48.42	RMS	34.6	-38.84	0.16	44.34	54	-9.66	-	-	191	214	V
			* 5.350	41.2	Pk	34.6	-23.03	0	52.77	-	-	74	-21.23	141	113	H
			* 5.426654	42.75	Pk	34.6	-23.35	0	54	-	-	74	-20	141	113	H
			* 5.350	28.51	RMS	34.6	-23.03	0.16	40.24	54	-13.76	-	-	141	113	H
			* 5.350635	29.61	RMS	34.6	-23.05	0.16	41.32	54	-12.68	-	-	141	113	H
			* 5.350	39.99	Pk	34.6	-23.03	0	51.56	-	-	74	-22.44	30	357	V
			* 5.355488	41.95	Pk	34.6	-23.13	0	53.42	-	-	74	-20.58	30	357	V
			* 5.350	28.49	RMS	34.6	-23.03	0.16	40.22	54	-13.78	-	-	30	357	V
			* 5.350332	29.89	RMS	34.6	-23.04	0.16	41.61	54	-12.39	-	-	30	357	V
EHT160 (242T / Index S64)	5250 (Upper)	6	5.35	63.83	Pk	34.8	-38.22	0	60.41	-	-	74	-13.59	178	241	H
			5.350075	64.88	Pk	34.8	-38.22	0	61.46	-	-	74	-12.54	178	241	H
			5.35	49.54	RMS	34.8	-38.22	0.1	46.22	54	-7.78	-	-	178	241	H
			5.350309	49.89	RMS	34.8	-38.21	0.1	46.58	54	-7.42	-	-	178	241	H
			5.35	60.83	Pk	34.8	-38.22	0	57.41	-	-	74	-16.59	227	162	V
			5.350402	62.39	Pk	34.8	-38.2	0	58.99	-	-	74	-15.01	227	162	V
		5	5.35	48.13	RMS	34.8	-38.22	0.1	44.81	54	-9.19	-	-	227	162	V
			5.350379	18.54	RMS	34.8	-38.2	0.1	15.24	54	-38.76	-	-	227	162	V
			* 5.35	56.95	Pk	34.5	-37.27	0	54.18	-	-	74	-19.82	36	165	H
			* 5.449987	59.49	Pk	34.6	-37	0	57.09	-	-	74	-16.91	36	165	H
			* 5.35	45.87	RMS	34.5	-37.27	0.1	43.2	54	-10.8	-	-	36	165	H
			* 5.431484	47.16	RMS	34.6	-37	0.1	44.86	54	-9.14	-	-	36	165	H
			* 5.35	56.17	Pk	34.5	-37.27	0	53.4	-	-	74	-20.6	85	190	V
			* 5.384888	59.51	Pk	34.5	-37.12	0	56.89	-	-	74	-17.11	85	190	V
			* 5.35	46.03	RMS	34.5	-37.27	0.1	43.36	54	-10.64	-	-	85	190	V
			* 5.415174	47.06	RMS	34.6	-37.05	0.1	44.71	54	-9.29	-	-	85	190	V
EHT160 (52T / Index S52)	5250 (Upper)	6	* 5.35	62.62	Pk	34.4	-38.18	0	58.84	-	-	74	-15.16	9	250	H
			* 5.350635	63.77	Pk	34.4	-38.23	0	59.94	-	-	74	-14.06	9	250	H
			* 5.35	46.49	RMS	34.4	-38.18	0.2	42.91	54	-11.09	-	-	9	250	H
			* 5.404394	48.44	RMS	34.4	-38.23	0.2	44.81	54	-9.19	-	-	9	250	H
			* 5.35	64.34	Pk	34.4	-38.18	0	60.56	-	-	74	-13.44	358	132	V
			* 5.350192	65.19	Pk	34.4	-38.2	0	61.39	-	-	74	-12.61	358	132	V
		5	* 5.35	47.57	RMS	34.4	-38.18	0.2	43.99	54	-10.01	-	-	358	132	V
			* 5.403951	48.7	RMS	34.4	-38.02	0.2	45.28	54	-8.72	-	-	358	132	V
			* 5.35	59.36	Pk	34.5	-37.27	0	56.59	-	-	74	-17.41	88	212	H
			* 5.350519	60.9	Pk	34.5	-37.25	0	58.15	-	-	74	-15.85	88	212	H
			* 5.35	46.04	RMS	34.5	-37.27	0.2	43.47	54	-10.53	-	-	88	212	H
			* 5.452134	47.55	RMS	34.6	-37	0.2	45.35	54	-8.65	-	-	88	212	H
			* 5.35	57.53	Pk	34.5	-37.27	0	54.76	-	-	74	-19.24	32	215	V
			* 5.45512	59.09	Pk	34.6	-37	0	56.69	-	-	74	-17.31	32	215	V
			* 5.35	46.31	RMS	34.5	-37.27	0.2	43.74	54	-10.26	-	-	32	215	V
			* 5.446767	47.04	RMS	34.6	-36.95	0.2	44.89	54	-9.11	-	-	32	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

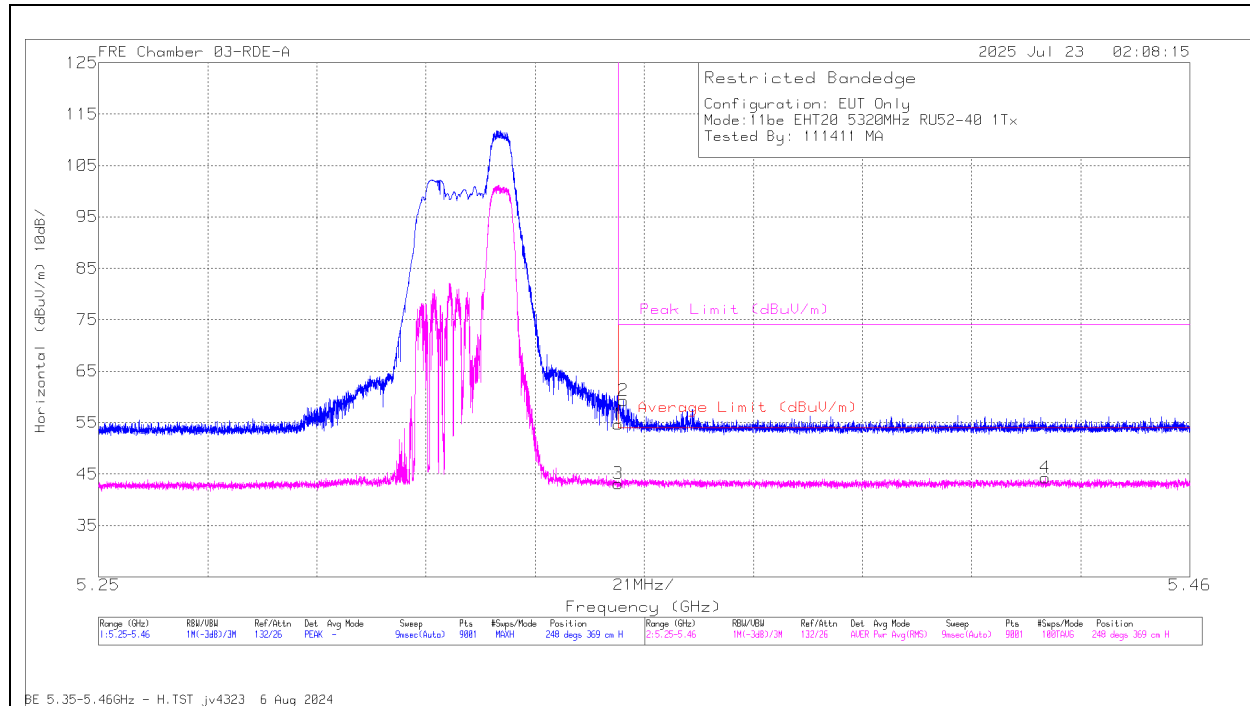BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	59.07	Pk	34.6	0	-38	54.67	-	-	74	-19.33	248	369	H
2	* 5.351009	62.64	Pk	34.6	0	-38	59.24	-	-	74	-14.76	248	369	H
3	* 5.35	46.59	RMS	34.6	0	-38	43.19	54	-10.81	-	-	248	369	H
4	* 5.432184	47.5	RMS	34.6	0	-37.8	44.3	54	-9.7	-	-	248	369	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

VERTICAL RESULT

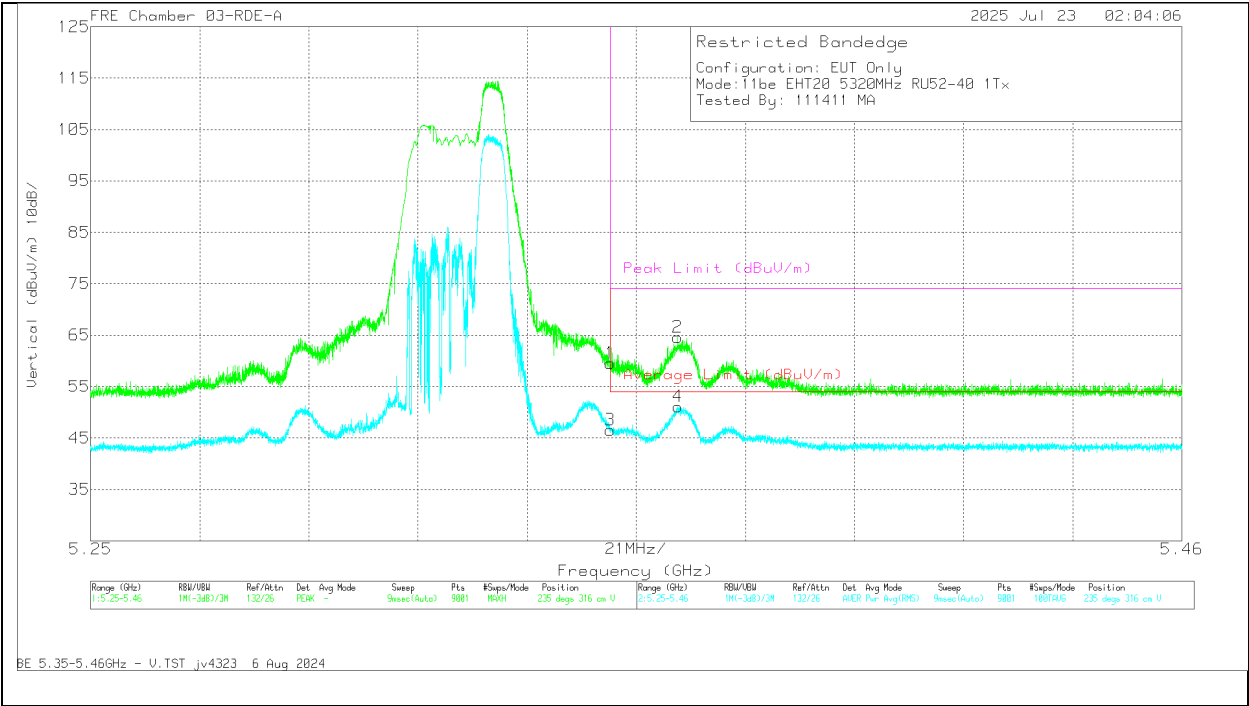

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	62.92	Pk	34.6	0	-38	59.52	-	-	74	-14.48	235	316	V
2	* 5.362978	67.84	Pk	34.6	0	-37.9	64.54	-	-	74	-9.46	235	316	V
3	* 5.35	49.96	RMS	34.6	0	-38	46.56	54	-7.44	-	-	235	316	V
4	* 5.363025	54.42	RMS	34.6	0	-37.9	51.12	54	-2.88	-	-	235	316	V

1.1.13. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5320	6 + 5	* 5.35	46.82	Pk	34.3	-16.9	0	64.22	-	-	74	-9.78	302	232	H
			* 5.350549	49.87	Pk	34.3	-16.9	0	67.27	-	-	74	-6.73	302	232	H
			* 5.35	33.07	RMS	34.3	-16.9	0	50.47	54	-3.53	-	-	302	232	H
			* 5.350155	33.69	RMS	34.3	-16.9	0	51.09	54	-2.91	-	-	302	232	H
			* 5.35	42.7	Pk	34.3	-16.9	0	60.1	-	-	74	-13.9	327	236	V
			* 5.353883	45.92	Pk	34.3	-16.8	0	63.42	-	-	74	-10.58	327	236	V
			* 5.35	30.21	RMS	34.3	-16.9	0	47.61	54	-6.39	-	-	327	236	V
			* 5.353542	30.8	RMS	34.3	-16.8	0	48.3	54	-5.7	-	-	327	236	V
EHT40 (SU Mode)	5310	6 + 5	* 5.35	63.52	Pk	34.5	-37.27	0	60.75	-	-	74	-13.25	36	213	H
			* 5.353692	72.24	Pk	34.5	-37.24	0	69.5	-	-	74	-4.5	36	213	H
			* 5.35	47.99	RMS	34.5	-37.27	0	45.22	54	-8.78	-	-	36	213	H
			* 5.352712	50.7	RMS	34.5	-37.25	0	47.95	54	-6.05	-	-	36	213	H
			* 5.35	58.35	Pk	34.5	-37.27	0	55.58	-	-	74	-18.24	21	224	V
			* 5.351709	69.95	Pk	34.5	-37.24	0	67.21	-	-	74	-6.79	21	224	V
			* 5.35	46.63	RMS	34.5	-37.27	0	43.86	54	-10.14	-	-	21	224	V
			* 5.352269	50.2	RMS	34.5	-37.24	0	47.46	54	-6.54	-	-	21	224	V
EHT80 (SU Mode)	5290	6 + 5	* 5.35	53.19	Pk	34.5	-23.6	0	64.09	-	-	74	-9.91	222	278	H
			* 5.353272	58.36	Pk	34.5	-23.7	0	69.16	-	-	74	-4.84	222	278	H
			* 5.35	32.83	RMS	34.5	-23.6	0	43.73	54	-10.27	-	-	222	278	H
			* 5.353879	37.43	RMS	34.5	-23.7	0	48.23	54	-5.77	-	-	222	278	H
			* 5.35	50.82	Pk	34.5	-23.6	0	61.72	-	-	74	-12.28	174	259	V
			* 5.353389	58.61	Pk	34.5	-23.7	0	69.41	-	-	74	-4.59	174	259	V
			* 5.35	32.16	RMS	34.5	-23.6	0	43.06	54	-10.94	-	-	174	259	V
			* 5.363375	37.62	RMS	34.6	-23.8	0	48.42	54	-5.58	-	-	174	259	V
EHT160 (SU Mode)	5250 (Upper)	6 + 5	* 5.35	44.56	Pk	34.4	-24.18	0	54.78	-	-	74	-19.22	234	137	H
			* 5.3597255	59.14	Pk	34.4	-23.98	0	69.56	-	-	74	-4.44	234	137	H
			* 5.35	33.49	RMS	34.4	-24.18	0.14	43.85	54	-10.15	-	-	234	137	H
			* 5.392845	40.23	RMS	34.4	-24.07	0.14	50.7	54	-3.3	-	-	234	137	H
			* 5.35	44.64	Pk	34.4	-24.18	0	54.86	-	-	74	-19.14	27	293	V
			* 5.397511	54.12	Pk	34.4	-23.97	0	64.55	-	-	74	-9.45	27	293	V
			* 5.35	32.79	RMS	34.4	-24.18	0.14	43.15	54	-10.85	-	-	27	293	V
			* 5.398188	35.95	RMS	34.4	-23.95	0.14	46.54	54	-7.46	-	-	27	293	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE

HORIZONTAL RESULT

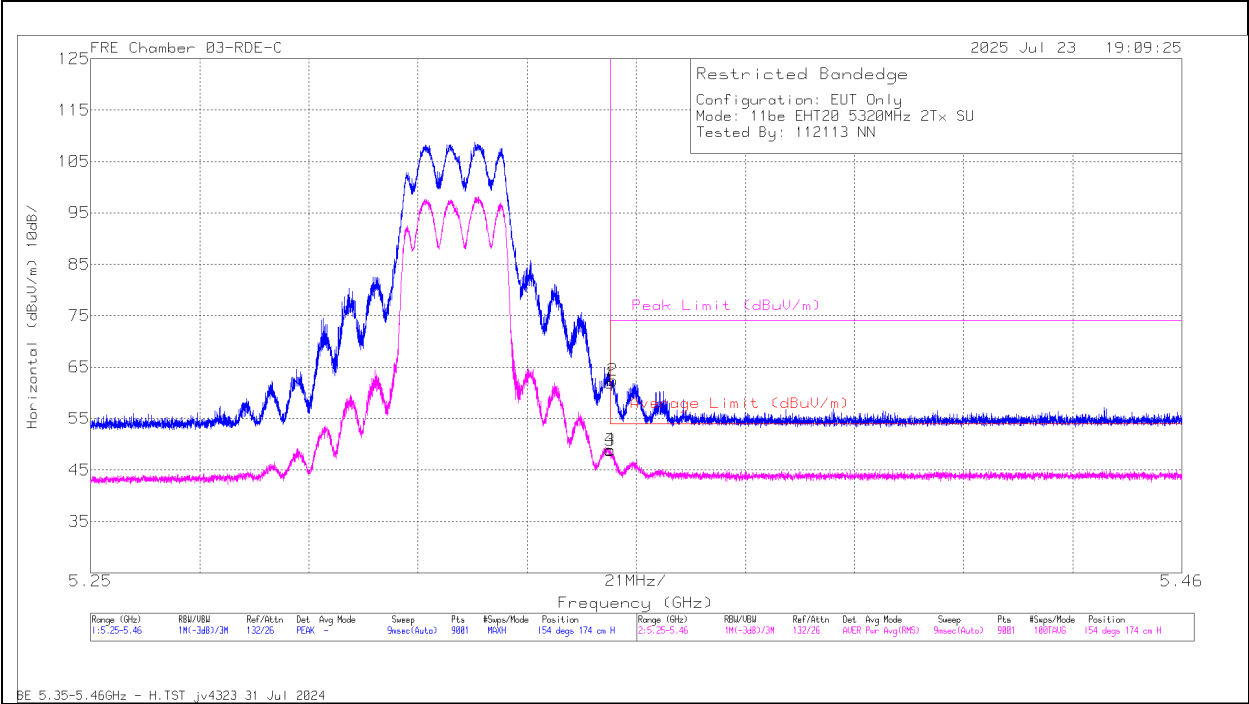

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.82	Pk	34.3	-16.9	0	64.22	-	-	74	-9.78	302	232	H
2	* 5.350549	49.87	Pk	34.3	-16.9	0	67.27	-	-	74	-6.73	302	232	H
3	* 5.35	33.07	RMS	34.3	-16.9	0	60.47	64	-3.53	-	-	302	232	H
4	* 5.350155	33.69	RMS	34.3	-16.9	0	51.09	64	-2.91	-	-	302	232	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

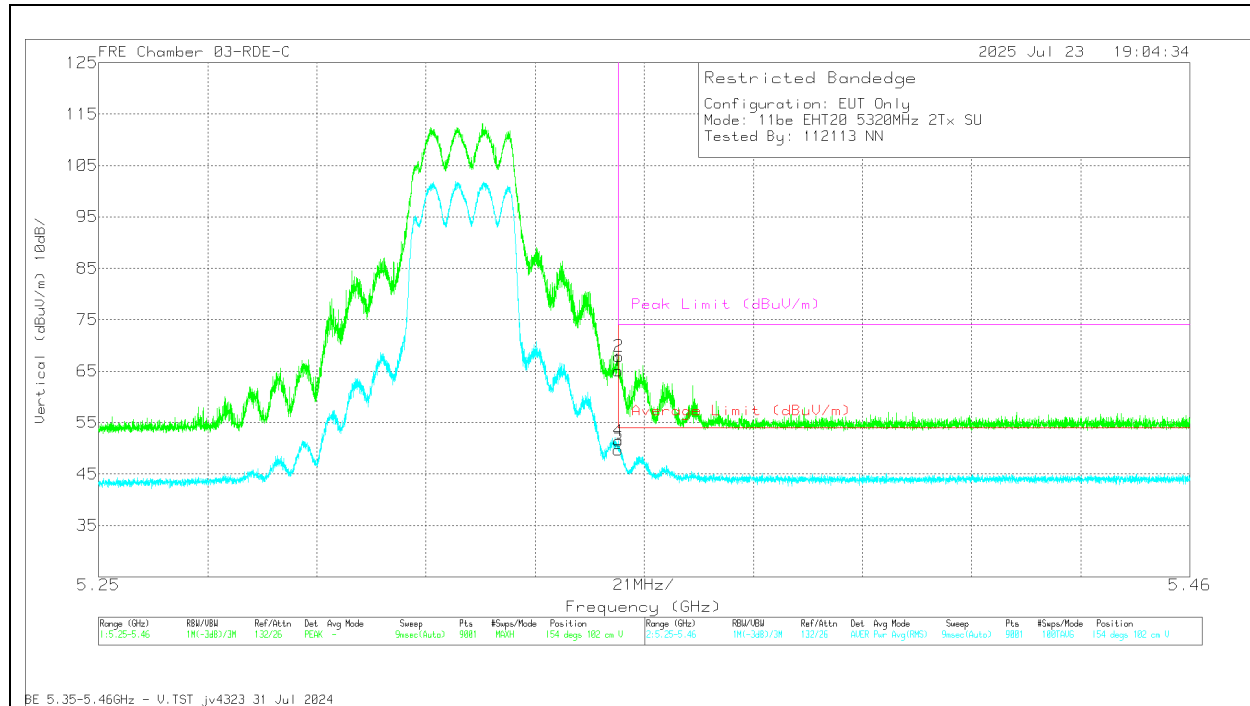BANDEDGE (HIGH CHANNEL / 5320MHz), SU MODE**VERTICAL RESULT**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	222740 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.7	Pk	34.3	-16.9	0	60.1	-	-	74	-13.9	327	236	V
2	* 5.353883	45.92	Pk	34.3	-16.8	0	63.42	-	-	74	-10.58	327	236	V
3	* 5.35	30.21	RMS	34.3	-16.9	0	47.61	54	-6.39	-	-	327	236	V
4	* 5.353542	30.8	RMS	34.3	-16.8	0	48.3	54	-5.7	-	-	327	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.14. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 40)	5320	6 + 5	* 5.35	56.75	Pk	34.5	-34.84	0	56.41	-	-	74	-17.59	164	188	H
			* 5.350355	58.99	Pk	34.5	-34.84	0	58.65	-	-	74	-15.35	164	188	H
			* 5.35	45.1	RMS	34.5	-34.84	0	44.76	54	-9.24	-	-	164	188	H
			* 5.439627	46.16	RMS	34.5	-34.6	0	46.06	54	-7.94	-	-	164	188	H
			* 5.35	56	Pk	34.5	-34.84	0	55.66	-	-	74	-18.34	10	360	V
			* 5.366408	58.15	Pk	34.5	-34.88	0	57.77	-	-	74	-16.23	10	360	V
			* 5.35	45.11	RMS	34.5	-34.84	0	44.77	54	-9.23	-	-	10	360	V
			* 5.430551	45.76	RMS	34.5	-34.56	0	45.7	54	-8.3	-	-	10	360	V
EHT40 (242T / Index 62)	5310	6 + 5	* 5.350	50.45	Pk	34.4	-24.18	0	60.67	-	-	74	-13.33	255	114	H
			* 5.350315	57.22	Pk	34.4	-24.07	0	67.55	-	-	74	-6.45	255	114	H
			* 5.350	34.92	RMS	34.4	-24.18	0	45.14	54	-8.86	-	-	255	114	H
			* 5.352199	38.28	RMS	34.4	-24.11	0	48.57	54	-5.43	-	-	255	114	H
			* 5.350	49.51	Pk	34.4	-24.18	0	59.73	-	-	74	-14.27	220	112	V
			* 5.353249	55.92	Pk	34.4	-24.07	0	66.25	-	-	74	-7.75	220	112	V
			* 5.350	35.38	RMS	34.4	-24.18	0	45.6	54	-8.4	-	-	220	112	V
			* 5.352269	38.59	RMS	34.4	-24.11	0	48.88	54	-5.12	-	-	220	112	V
EHT40 (106+26)T / Index 85)	5310	6 + 5	* 5.350	62.29	Pk	34.6	-35.89	0	61	-	-	74	-13	186	159	H
			* 5.350495	64.86	Pk	34.6	-35.91	0	63.55	-	-	74	-10.45	186	159	H
			* 5.350	45.62	RMS	34.6	-35.89	0	44.33	54	-9.67	-	-	186	159	H
			* 5.351242	46.55	RMS	34.6	-35.96	0	45.19	54	-8.81	-	-	186	159	H
			* 5.350	56.61	Pk	34.6	-35.89	0	55.32	-	-	74	-18.68	26	157	V
			* 5.351732	59.99	Pk	34.6	-35.99	0	58.6	-	-	74	-15.4	26	157	V
			* 5.350	44.9	RMS	34.6	-35.89	0	43.61	54	-10.39	-	-	26	157	V
			* 5.447911	45.99	RMS	34.6	-35.9	0	44.69	54	-9.31	-	-	26	157	V
EHT80 (484T / Index 66)	5290	6 + 5	* 5.350	57.41	Pk	34.6	-23.03	0	68.98	-	-	74	-5.02	177	153	H
			* 5.350052	57.62	Pk	34.6	-23.03	0	69.19	-	-	74	-4.81	177	153	H
			* 5.350	36.36	RMS	34.6	-23.03	0	47.93	54	-6.07	-	-	177	153	H
			* 5.353552	37.47	RMS	34.6	-23.1	0	48.97	54	-5.03	-	-	177	153	H
			* 5.350	55.29	Pk	34.6	-23.03	0	66.86	-	-	74	-7.14	21	303	V
			* 5.353459	56.24	Pk	34.6	-23.09	0	67.75	-	-	74	-6.25	21	303	V
			* 5.350	33.41	RMS	34.6	-23.03	0	44.98	54	-9.02	-	-	21	303	V
			* 5.353412	35.31	RMS	34.6	-23.09	0	46.82	54	-7.18	-	-	21	303	V
EHT80 (52T / Index 52)	5290	6 + 5	* 5.350	48.32	Pk	34.6	-23.03	0	59.89	-	-	74	-14.11	28	167	H
			* 5.350612	50.13	Pk	34.6	-23.05	0	61.68	-	-	74	-12.32	28	167	H
			* 5.350	30.99	RMS	34.6	-23.03	0.16	42.72	54	-11.28	-	-	28	167	H
			* 5.350005	31.14	RMS	34.6	-23.03	0.16	42.87	54	-11.13	-	-	28	167	H
			* 5.350	41.77	Pk	34.6	-23.03	0	53.34	-	-	74	-20.66	190	307	V
			* 5.350309	43.25	Pk	34.6	-23.04	0	54.81	-	-	74	-19.19	190	307	V
			* 5.350	28.85	RMS	34.6	-23.03	0.16	40.58	54	-13.42	-	-	190	307	V
			* 5.364308	30.06	RMS	34.6	-23.02	0.16	41.8	54	-12.2	-	-	190	307	V
EHT160 (242T / Index 564)	5250 (Upper)	6 + 5	* 5.350	49.6	Pk	34.4	-24.18	0	59.82	-	-	74	-14.18	78	323	H
			* 5.351499	52.39	Pk	34.4	-24.09	0	62.7	-	-	74	-11.3	78	323	H
			* 5.350	34.76	RMS	34.4	-24.18	0.1	45.08	54	-8.92	-	-	78	323	H
			* 5.352735	36.64	RMS	34.4	-24.08	0.1	47.06	54	-6.94	-	-	78	323	H
			* 5.350	57.68	Pk	34.4	-24.18	0	67.9	-	-	74	-9.1	35	104	V
			* 5.350939	57.24	Pk	34.4	-24.08	0	67.56	-	-	74	-6.44	35	104	V
			* 5.350	40.07	RMS	34.4	-24.18	0.1	50.39	54	-3.61	-	-	35	104	V
			* 5.350449	40.77	RMS	34.4	-24.13	0.1	51.14	54	-2.86	-	-	35	104	V
EHT160 (52T / Index 552)	5250 (Upper)	6 + 5	* 5.350	50.64	Pk	34.4	-24.18	0	60.86	-	-	74	-13.14	263	131	H
			* 5.350005	50.69	Pk	34.4	-24.18	0	60.91	-	-	74	-13.09	263	131	H
			* 5.350	33.14	RMS	34.4	-24.18	0.2	43.56	54	-10.44	-	-	263	131	H
			* 5.404394	34.45	RMS	34.4	-24	0.2	45.05	54	-8.95	-	-	263	131	H
			* 5.350	48.96	Pk	34.4	-24.18	0	59.18	-	-	74	-14.82	196	101	V
			* 5.350099	51.61	Pk	34.4	-24.17	0	61.84	-	-	74	-12.16	196	101	V
			* 5.350	33.41	RMS	34.4	-24.18	0.2	43.83	54	-10.17	-	-	196	100	V
			* 5.404791	34.48	RMS	34.4	-23.98	0.2	45.1	54	-8.9	-	-	196	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

HORIZONTAL RESULT

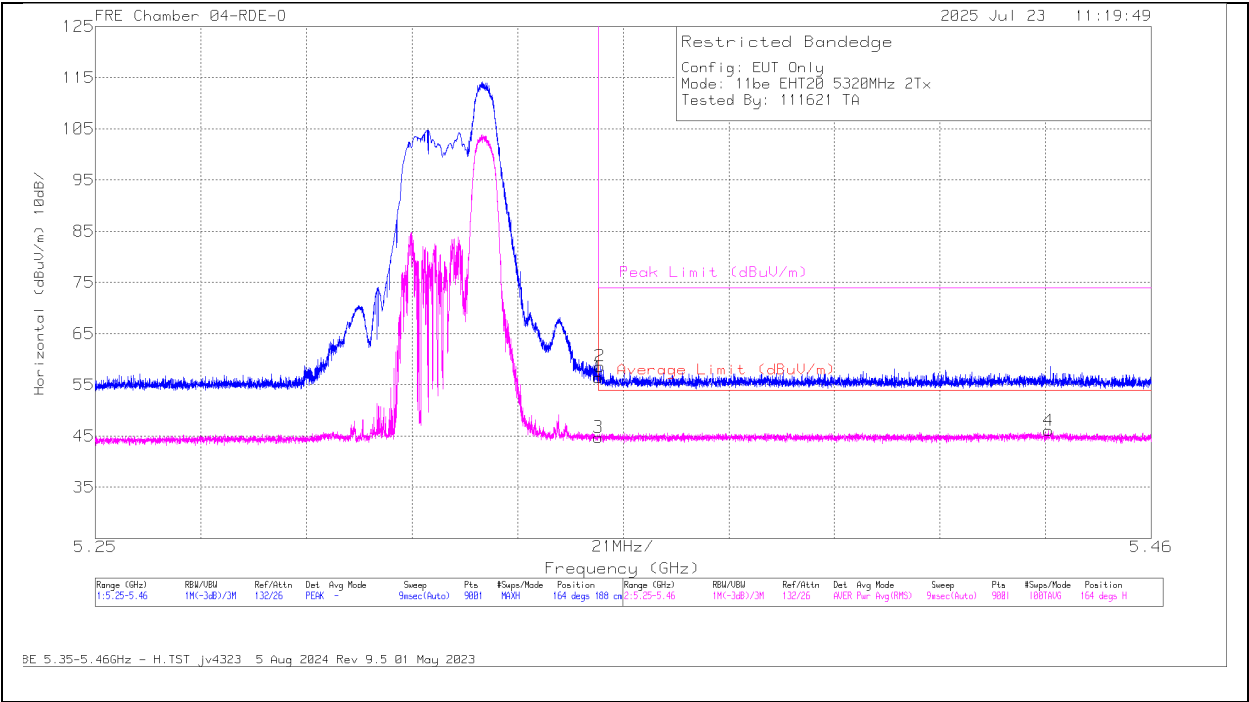


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	56.75	Pk	34.5	0	-34.84	56.41	-	-	74	-17.59	164	188	H
3	* 5.350355	58.99	Pk	34.5	0	-34.84	58.65	-	-	74	-15.35	164	188	H
2	* 5.35	45.1	RMS	34.5	0	-34.84	44.76	54	-9.24	-	-	164	188	H
4	* 5.439627	46.16	RMS	34.5	0	-34.6	46.06	54	-7.94	-	-	164	188	H

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5320MHz), PARTIAL RU 52

VERTICAL RESULT

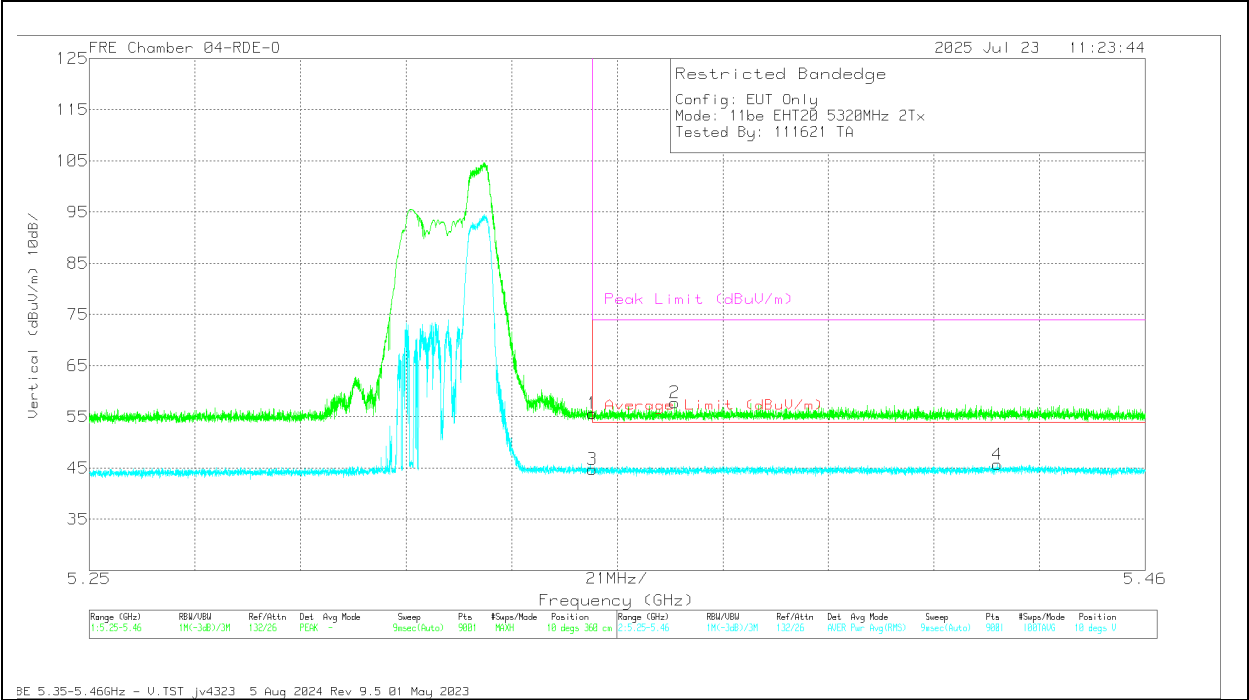

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	56	Pk	34.5	0	-34.84	55.66	-	-	74	-18.34	10	360	V
3	* 5.366408	58.15	Pk	34.5	0	-34.88	57.77	-	-	74	-16.23	10	360	V
2	* 5.35	45.11	RMS	34.5	0	-34.84	44.77	54	-9.23	-	-	10	360	V
4	* 5.430551	45.76	RMS	34.5	0	-34.56	45.7	54	-8.3	-	-	10	360	V

Pk - Peak detector
RMS - RMS detection

1.1.15. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2a (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5260	6 + 5	* 12.529843	40.63	ADR	39	-39.3	0	40.33	54	-13.67	-	-	119	101	V
			* 12.531679	40.83	ADR	39	-39.5	0	40.33	54	-13.67	-	-	119	101	H
			* 12.549585	52.24	PK-U	39	-39.4	0	51.84	-	-	74	-22.16	119	101	V
			* 12.568115	52.41	PK-U	39	-39.9	0	51.51	-	-	74	-22.49	119	101	H
			* 4.209453	56.61	PK-U	33.4	-46.1	0	43.91	-	-	74	-30.09	119	101	H
			* 4.213786	45.01	ADR	33.4	-46.2	0	32.21	54	-21.79	-	-	119	101	H
			* 4.220266	57.36	PK-U	33.4	-46.3	0	44.46	-	-	74	-29.54	119	101	V
			* 4.221651	45.1	ADR	33.4	-46.2	0	32.3	54	-21.7	-	-	119	192	V
			* 8.195101	41.97	ADR	35.9	-42.3	0	35.57	54	-18.43	-	-	119	101	H
			* 8.198558	53.81	PK-U	35.9	-42.3	0	47.41	-	-	74	-26.59	119	101	H
			* 8.208616	53.27	PK-U	35.9	-42.2	0	46.97	-	-	74	-27.03	119	101	V
			* 8.213087	41.67	ADR	35.9	-42.3	0	35.27	54	-18.73	-	-	119	101	V
	5300	6 + 5	* 12.240351	52.41	PK-U	38.9	-40.1	0	51.21	-	-	74	-22.79	360	101	V
			* 12.242829	52.35	PK-U	38.9	-40.1	0	51.15	-	-	74	-22.85	360	101	H
			* 12.258347	40.93	ADR	38.9	-39.8	0	40.03	54	-13.97	-	-	360	101	V
			* 12.263412	40.91	ADR	38.9	-39.7	0	40.11	54	-13.89	-	-	360	101	H
			* 3.862547	55.52	PK-U	33.5	-45.4	0	43.62	-	-	74	-30.38	360	101	V
			* 3.870139	44.21	ADR	33.5	-45.6	0	32.11	54	-21.89	-	-	360	101	H
			* 3.878426	56	PK-U	33.5	-45.3	0	44.2	-	-	74	-29.8	360	101	H
			* 3.87868	44.5	ADR	33.5	-45.3	0	32.7	54	-21.3	-	-	360	101	V
			* 8.070946	53.01	PK-U	35.9	-42.3	0	46.61	-	-	74	-27.39	360	101	V
			* 8.07331	41.74	ADR	35.9	-42.1	0	35.54	54	-18.46	-	-	360	101	V
			* 8.074454	53.3	PK-U	35.9	-42.2	0	47	-	-	74	-27	360	101	H
			* 8.075596	41.86	ADR	35.9	-42.2	0	35.56	54	-18.44	-	-	360	101	H
	5320	6 + 5	* 11.945358	40.99	ADR	38.7	-40.1	0	39.59	54	-14.41	-	-	360	101	H
			* 11.953403	40.97	ADR	38.7	-40.1	0	39.57	54	-14.43	-	-	360	101	V
			* 11.95835	52.35	PK-U	38.7	-40	0	51.05	-	-	74	-22.95	360	101	V
			* 11.968269	52.25	PK-U	38.7	-40.2	0	50.75	-	-	74	-23.25	360	101	H
			* 3.702799	44.36	ADR	33.3	-45.7	0	31.96	54	-22.04	-	-	360	101	H
			* 3.708785	55.67	PK-U	33.3	-45.6	0	43.37	-	-	74	-30.63	360	101	V
			* 3.711825	44.38	ADR	33.3	-45.6	0	32.08	54	-21.92	-	-	360	101	V
			* 3.719199	55.86	PK-U	33.3	-45.5	0	43.66	-	-	74	-30.34	360	101	H
			* 8.181289	41.59	ADR	35.9	-42.1	0	35.39	54	-18.61	-	-	360	101	H
			* 8.190861	53.68	PK-U	35.9	-42.2	0	47.38	-	-	74	-26.62	360	101	V
			* 8.196826	41.64	ADR	35.9	-42.2	0	35.34	54	-18.66	-	-	360	101	V
			* 8.203956	53.11	PK-U	35.9	-42.4	0	46.61	-	-	74	-27.39	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5270	6 + 5	2.493653	61.24	PK-U	32.2	-50.12	0	43.32	-	-	74	-30.68	360	200	H
			2.4946	49.24	ADR	32.2	-50.14	0	31.3	54	-22.7	-	-	360	200	H
			2.490494	60.44	PK-U	32.2	-50.11	0	42.53	-	-	74	-31.47	360	101	V
			2.499214	49.19	ADR	32.2	-50.13	0	31.26	54	-22.74	-	-	360	101	V
			7.798282	56.39	PK-U	35.7	-46.23	0	45.86	-	-	68.2	-22.34	360	200	H
			7.78742	44.76	ADR	35.8	-46.25	0	34.31	-	-	-	-	360	200	H
			12.609205	54.86	PK-U	38.9	-43.36	0	50.4	-	-	74	-23.6	360	200	H
			12.607178	43.14	ADR	38.9	-43.35	0	38.69	54	-15.31	-	-	360	200	H
			7.795012	56.52	PK-U	35.7	-46.16	0	46.06	-	-	68.2	-22.14	360	101	V
			7.794008	44.88	ADR	35.7	-46.2	0	34.38	-	-	-	-	360	101	V
			12.635135	54.48	PK-U	39	-43.36	0	50.12	-	-	74	-23.88	360	101	V
			12.62046	43.05	ADR	39	-43.43	0	38.62	54	-15.38	-	-	360	101	V
	5310	6 + 5	2.116513	61	PK-U	31.9	-50.27	0	42.63	-	-	68.2	-25.57	360	199	H
			2.104533	49.34	ADR	31.9	-50.19	0	31.05	-	-	-	-	360	199	H
			2.103714	61.96	PK-U	31.9	-50.18	0	43.68	-	-	68.2	-24.52	360	199	V
			2.107041	49.22	ADR	31.9	-50.2	0	30.92	-	-	-	-	360	199	V
			11.099828	56.14	PK-U	37.6	-45.06	0	48.68	-	-	74	-25.32	360	199	H
			11.092281	44.7	ADR	37.6	-45.08	0	37.22	54	-16.78	-	-	360	199	H
			14.040075	56	PK-U	39.1	-42.83	0	52.27	-	-	68.2	-15.93	360	199	H
			14.063702	44.15	ADR	39.1	-43.44	0	39.81	-	-	-	-	360	199	H
			11.099397	56.23	PK-U	37.6	-45.07	0	48.76	-	-	74	-25.24	360	101	V
			11.10009	44.66	ADR	37.6	-45.06	0	37.2	54	-16.8	-	-	360	101	V
			14.040815	56.07	PK-U	39.1	-42.84	0	52.33	-	-	68.2	-15.87	360	200	V
			14.047055	44.44	ADR	39.1	-42.93	0	40.61	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5290	6 + 5	* 2.240965	59.01	PK-U	31.5	0	-48.91	41.6	-	-	74	-32.4	0	101	H
			* 2.23896	47.19	ADR	31.4	0	-48.91	29.68	54	-24.32	-	-	0	101	H
			* 2.819532	56.79	PK-U	32.2	0	-47.67	41.32	-	-	74	-32.68	0	101	V
			* 2.817854	45.41	ADR	32.2	0	-47.7	29.91	54	-24.09	-	-	0	101	V
			* 10.624432	55.86	PK-U	37.8	0	-43.62	50.04	-	-	74	-23.96	0	101	V
			* 10.623157	44.52	ADR	37.8	0	-43.59	38.73	54	-15.27	-	-	0	101	V
			* 10.969861	55.71	PK-U	37.9	0	-43.31	50.3	-	-	74	-23.7	0	101	V
			* 10.967129	44.04	ADR	37.8	0	-43.33	38.51	54	-15.49	-	-	0	101	V
			2.523444	46.63	ADR	32.3	0	-48.3	30.63	-	-	-	-	0	101	H
			2.523669	59.06	PK-U	32.3	0	-48.3	43.06	-	-	68.2	-25.14	0	101	H
			9.658301	56.76	PK-U	37	0	-44.64	49.12	-	-	68.2	-19.08	0	101	H
			9.658804	45.58	ADR	37	0	-44.63	37.95	-	-	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5250 (Straddle)	6 + 5	* 2.803432	47.14	PK-U	32.4	-25.97	0	53.57	-	-	74	-20.43	223	262	H
			* 2.788586	34.63	ADR	32.4	-25.96	0	41.07	54	-12.93	-	-	223	262	H
			* 2.772378	45.96	PK-U	32.4	-25.98	0	52.38	-	-	74	-21.62	304	120	V
			* 2.799546	34.96	ADR	32.4	-26.06	0	41.3	54	-12.7	-	-	304	120	V
			* 11.469929	55.9	PK-U	38.3	-44.65	0	49.55	-	-	74	-24.45	291	229	H
			* 11.479392	44.71	ADR	38.3	-44.62	0	38.39	54	-15.61	-	-	291	229	H
			* 11.429548	56.03	PK-U	38.3	-44.75	0	49.58	-	-	74	-24.42	229	154	V
			* 11.456496	44.54	ADR	38.3	-44.64	0	38.2	54	-15.8	-	-	229	154	V
			8.646533	45.32	ADR	36.1	-45.5	0	35.92	-	-	-	-	353	396	V
			8.654505	44.77	ADR	36.1	-45.38	0	35.49	-	-	-	-	322	175	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)

LOW CHANNEL RESULTS

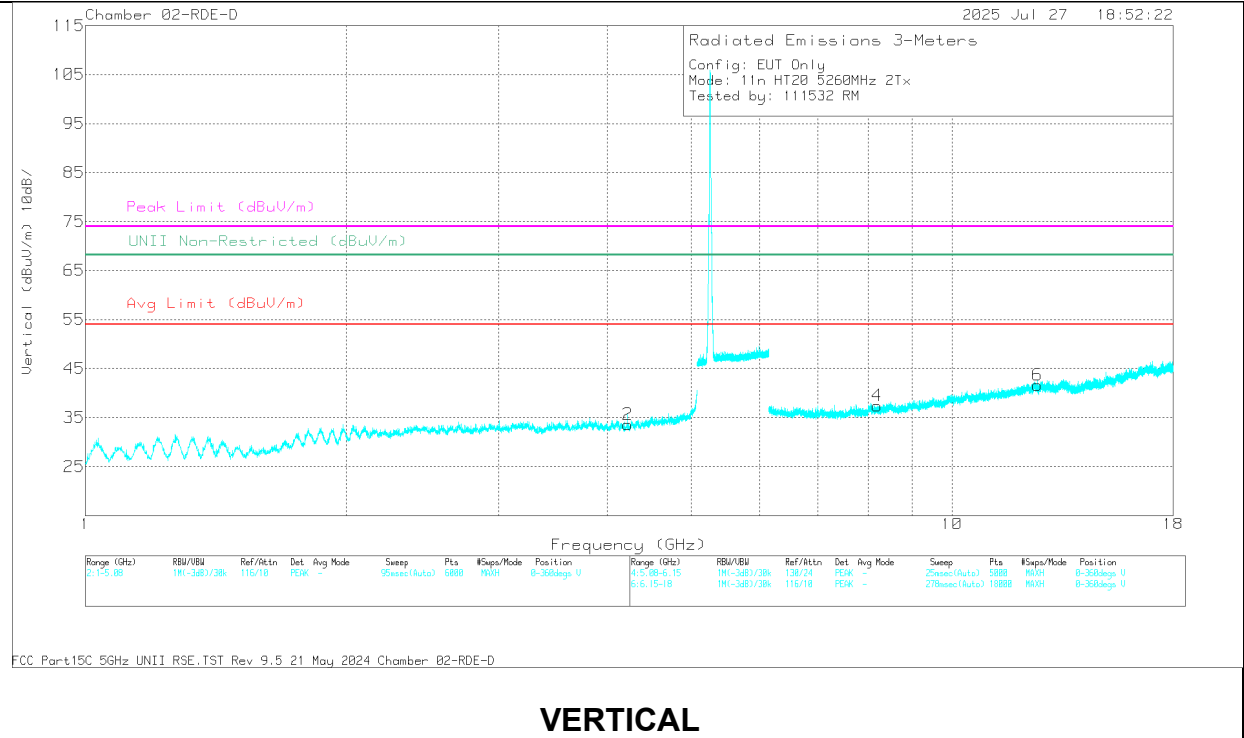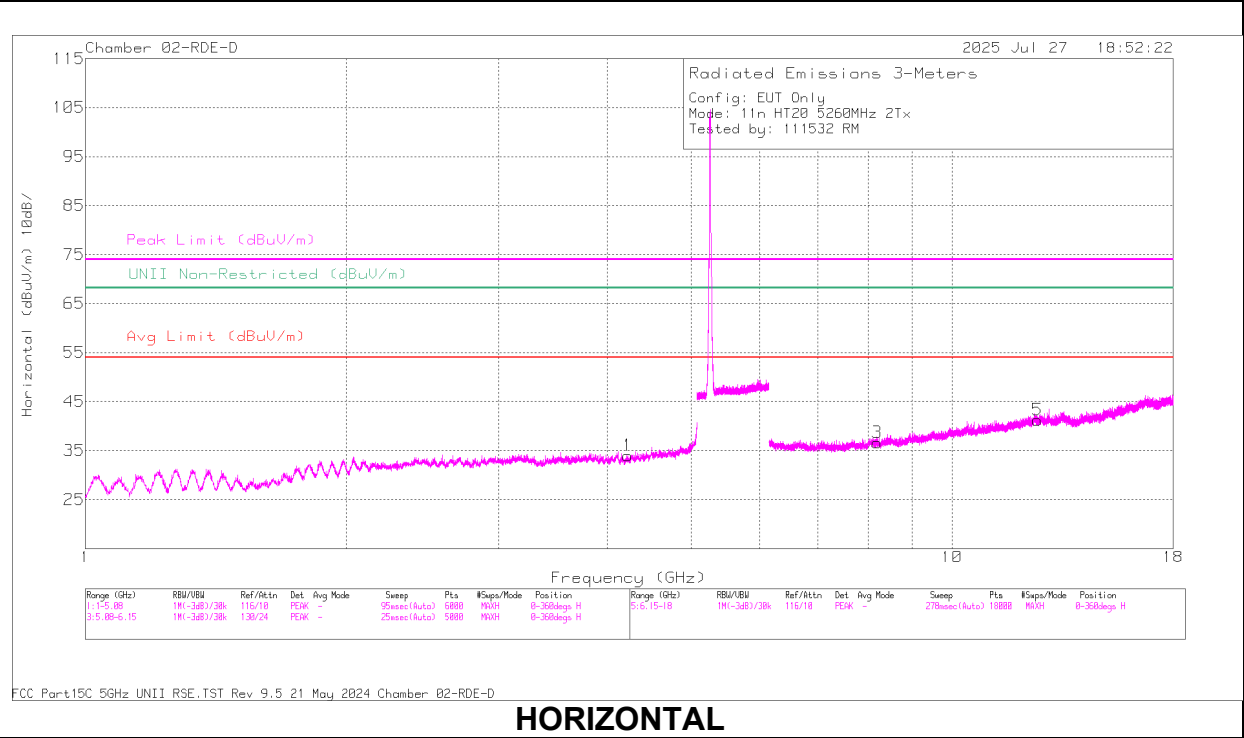

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 12.529843	40.83	ADR	39	-39.3	0	40.33	54	-13.67	-	-	119	101	V
1	* 12.531679	40.83	ADR	39	-39.5	0	40.33	54	-13.67	-	-	119	101	H
2	* 12.549585	52.24	PK-U	39	-39.4	0	51.84	-	-	74	-22.16	119	101	V
2	* 12.568115	52.41	PK-U	39	-39.9	0	51.51	-	-	74	-22.49	119	101	H
3	* 4.209453	56.61	PK-U	33.4	-46.1	0	43.91	-	-	74	-30.09	119	101	H
3	* 4.213786	45.01	ADR	33.4	-46.2	0	32.21	54	-21.79	-	-	119	101	H
4	* 4.220266	57.36	PK-U	33.4	-46.3	0	44.46	-	-	74	-29.54	119	101	V
4	* 4.221651	45.1	ADR	33.4	-46.2	0	32.3	54	-21.7	-	-	119	192	V
5	* 8.195101	41.97	ADR	35.9	-42.3	0	35.57	54	-18.43	-	-	119	101	H
5	* 8.198558	53.81	PK-U	35.9	-42.3	0	47.41	-	-	74	-26.59	119	101	H
6	* 8.208616	53.27	PK-U	35.9	-42.2	0	46.97	-	-	74	-27.03	119	101	V
6	* 8.213087	41.67	ADR	35.9	-42.3	0	35.27	54	-18.73	-	-	119	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.16. 802.11be MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5260	6 + 5	2.665406	49.12	ADR	32.6	-48.95	0	32.77	54	-21.23	-	-	322	286	H
			2.674946	61.61	PK-U	32.6	-48.86	0	45.35	-	-	74	-28.65	322	286	H
			2.675651	49.21	ADR	32.6	-48.82	0	32.99	54	-21.01	-	-	342	284	V
			2.676858	61.01	PK-U	32.6	-48.89	0	44.72	-	-	74	-29.28	342	284	V
			9.757316	47.74	ADR	37	-45.77	0	38.97	-	-	-	-	15	196	V
			9.769365	59.8	PK-U	37	-45.83	0	50.97	-	-	68.2	-17.23	15	196	V
			9.777311	59.4	PK-U	37	-45.78	0	50.62	-	-	68.2	-17.58	324	118	H
			9.786227	47.77	ADR	37	-45.78	0	38.99	-	-	-	-	324	118	H
			11.590209	57.85	PK-U	38.3	-43.73	0	52.42	-	-	74	-21.58	200	255	V
			11.598497	57.92	PK-U	38.3	-43.86	0	52.36	-	-	74	-21.64	281	253	H
			11.61123	46.31	ADR	38.3	-43.81	0	40.8	54	-13.2	-	-	281	253	H
			11.615036	46.26	ADR	38.3	-43.97	0	40.59	54	-13.41	-	-	200	255	V
	5300	6 + 5	* 2.239055	58.42	PK-U	31.4	-48.91	0	40.91	-	-	74	-33.09	0	199	H
			* 2.237225	46.98	ADR	31.4	-48.91	0	29.47	54	-24.53	-	-	0	199	H
			2.084194	47.31	ADR	31.2	-48.51	0	30	-	-	-	-	0	101	H
			2.085775	59.08	PK-U	31.2	-48.53	0	41.75	-	-	68.2	-26.45	0	101	H
			2.600801	45.71	ADR	32.4	-48.42	0	29.69	-	-	-	-	0	199	V
			2.602749	57.34	PK-U	32.4	-48.43	0	41.31	-	-	68.2	-26.89	0	199	V
			8.983449	55.62	PK-U	36.3	-44.43	0	47.49	-	-	68.2	-20.71	0	101	H
			8.986057	44.3	ADR	36.3	-44.43	0	36.17	-	-	-	-	0	101	H
			9.707169	56.88	PK-U	37	-44.88	0	49	-	-	68.2	-19.2	0	101	V
			9.709112	45.34	ADR	37	-44.86	0	37.48	-	-	-	-	0	101	V
			10.566924	56.04	PK-U	37.7	-42.94	0	50.8	-	-	68.2	-17.4	0	199	V
			10.567144	44.01	ADR	37.7	-42.94	0	38.77	-	-	-	-	0	199	V
	5320	6 + 5	* 2.797916	57.53	PK-U	32.3	-47.74	0	42.09	-	-	74	-31.91	1	101	V
			* 2.798449	45.54	ADR	32.3	-47.74	0	30.1	54	-23.9	-	-	1	101	V
			* 9.031402	56.15	PK-U	36.3	-44.58	0	47.87	-	-	74	-26.13	1	101	H
			* 9.031992	44.46	ADR	36.3	-44.58	0	36.18	54	-17.82	-	-	1	101	H
			* 10.752644	55.85	PK-U	37.8	-43.7	0	49.95	-	-	74	-24.05	1	101	V
			* 10.749992	44.42	ADR	37.8	-43.69	0	38.53	54	-15.47	-	-	1	101	V
			2.30561	58.85	PK-U	31.7	-48.95	0	41.6	-	-	68.2	-26.6	1	200	H
			2.30579	46.82	ADR	31.7	-48.95	0	29.57	-	-	-	-	1	200	H
			2.515364	46.03	ADR	32.3	-48.32	0	30.01	-	-	-	-	1	200	H
			2.516804	57.67	PK-U	32.3	-48.31	0	41.66	-	-	68.2	-26.54	1	200	H
			10.00172	44.9	ADR	37.3	-44.67	0	37.53	-	-	-	-	1	101	V
			10.002496	56.17	PK-U	37.3	-44.65	0	48.82	-	-	68.2	-19.38	1	101	V
11be (52T / Highest PSD)	5260 (Low Index)	6 + 5	* 1.214251	59.08	PK-U	28.6	-46.45	0	41.23	-	-	74	-32.77	360	100	H
			* 1.217591	46.99	ADR	28.7	-46.44	0	29.25	54	-24.75	-	-	360	100	H
			* 1.209227	58.41	PK-U	28.5	-46.45	0	40.46	-	-	74	-33.54	360	201	V
			* 1.212752	46.9	ADR	28.6	-46.45	0	29.05	54	-24.95	-	-	360	201	V
			* 11.8631	52.28	PK-U	38.5	-40.53	0	50.25	-	-	74	-23.75	360	100	H
			* 11.863249	41.19	ADR	38.5	-40.53	0	39.16	54	-14.84	-	-	360	100	H
			* 11.858048	52.43	PK-U	38.5	-40.57	0	50.36	-	-	74	-23.64	360	200	V
			* 11.857986	41.3	ADR	38.5	-40.57	0	39.23	54	-14.77	-	-	360	200	V
			8.761367	52.69	PK-U	35.9	-40.37	0	48.22	-	-	68.2	-19.98	360	100	H
			8.762529	41.45	ADR	35.9	-40.36	0	36.99	-	-	-	-	360	100	H
			8.764583	41.27	ADR	35.9	-40.44	0	36.73	-	-	-	-	360	201	V
			8.765052	52.32	PK-U	35.9	-40.48	0	47.74	-	-	68.2	-20.46	360	201	V
	5300 (Mid Index)	6 + 5	* 3.745197	35.54	PK-U	33.2	-28.2	0	40.54	-	-	74	-33.46	303	214	V
			* 3.745449	23.53	ADR	33.2	-28.2	0	28.53	54	-25.47	-	-	303	214	V
			* 11.736372	32.48	PK-U	38.7	-17	0	54.18	-	-	74	-19.82	294	261	H
			* 11.7361	21.17	ADR	38.7	-17	0	42.87	54	-11.13	-	-	294	261	H
			* 11.76528	32.7	PK-U	38.7	-17.5	0	53.9	-	-	74	-20.1	1	188	V
			* 11.76405	20.99	ADR	38.7	-17.5	0	42.19	54	-11.81	-	-	1	188	V
			3.125257	22.98	ADR	33.2	-29.7	0	26.48	-	-	-	-	9	336	H
			3.125533	34.75	PK-U	33.2	-29.6	0	38.35	-	-	68.2	-29.85	9	336	H
			7.908116	20.92	ADR	35.8	-20.3	0	36.42	-	-	-	-	96	120	V
			7.909992	32.47	PK-U	35.8	-20.3	0	47.97	-	-	68.2	-20.23	96	120	V
			8.869462	32.29	PK-U	36.1	-19.3	0	49.09	-	-	68.2	-19.11	296	243	H
			8.870115	20.45	ADR	36.1	-19.4	0	37.15	-	-	-	-	296	243	H
	5320 (High Index)	6 + 5	1.671551	60.66	PK-U	28.6	-49.89	0	39.37	-	-	74	-34.63	81	397	H
			1.839489	49.43	ADR	30.5	-49.91	0	30.02	-	-	-	-	81	397	H
			2.671987	60.47	PK-U	32.7	-49.54	0	43.63	-	-	74	-30.37	241	311	V
			2.660394	48.53	ADR	32.7	-49.53	0	31.7	54	-22.3	-	-	241	311	V
			10.6417	56.97	PK-U	37.6	-45.6	0	48.97	-	-	74	-25.03	356	395	H
			10.668074	45.11	ADR	37.7	-45.43	0	37.38	54	-16.62	-	-	356	395	H
			15.959396	54.34	PK-U	41.1	-41.86	0	53.58	-	-	74	-20.42	133	234	H
			15.946178	42.6	ADR	41.1	-41.58	0	42.12	54	-11.88	-	-	133	234	H
			10.612959	56.78	PK-U	37.7	-45.6	0	48.88	-	-	74	-25.12	163	175	V
			10.615822	44.99	ADR	37.7	-45.55	0	37.14	54	-16.86	-	-	163	175	V
			15.964444	54.13	PK-U	41.1	-41.92	0	53.31	-	-	74	-20.69	344	199	V
			15.973511	42.68	ADR	41.1	-42.09	0	41.69	54	-12.31	-	-	344	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/CbI/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5270	6 + 5	* 4.103407	55.85	PK-U	33.5	-46.43	0	42.92	-	-	74	-31.08	18	362	H
			* 4.101264	44.32	ADR	33.5	-46.42	0	31.4	54	-22.6	-	-	18	362	H
			* 4.108447	55.47	PK-U	33.5	-46.37	0	42.6	-	-	74	-31.4	329	160	V
			* 4.109079	43.92	ADR	33.5	-46.36	0	31.06	54	-22.94	-	-	329	160	V
			* 7.415149	56.61	PK-U	35.7	-46.14	0	46.17	-	-	74	-27.83	95	131	H
			* 7.414326	44.38	ADR	35.7	-46.13	0	33.95	54	-20.05	-	-	95	131	H
			* 9.076898	54.68	PK-U	36.3	-43.6	0	47.38	-	-	74	-26.62	228	101	H
			* 9.077882	43.26	ADR	36.3	-43.61	0	35.95	54	-18.05	-	-	228	101	H
			* 7.432809	56.02	PK-U	35.7	-46.13	0	45.59	-	-	74	-28.41	57	186	V
			* 7.433368	44.5	ADR	35.7	-46.14	0	34.06	54	-19.94	-	-	57	186	V
	5310	6 + 5	* 9.054739	53.95	PK-U	36.3	-43.43	0	46.82	-	-	74	-27.18	299	137	V
			* 9.056456	42.76	ADR	36.3	-43.48	0	35.58	54	-18.42	-	-	299	137	V
			* 3.686857	55.86	PK-U	33.1	-46.36	0	42.6	-	-	74	-31.4	3	167	H
			* 3.686965	44.28	ADR	33.1	-46.36	0	31.02	54	-22.98	-	-	3	167	H
			* 3.655691	56.27	PK-U	33.1	-46.56	0	42.81	-	-	74	-31.19	100	204	V
			* 3.653861	45.17	ADR	33.1	-46.59	0	31.68	54	-22.32	-	-	100	204	V
			* 7.60266	56.28	PK-U	36	-45.41	0	46.87	-	-	74	-27.13	345	245	H
			* 7.600077	44.28	ADR	35.9	-45.43	0	34.75	54	-19.25	-	-	345	245	H
			* 7.586447	55.87	PK-U	35.9	-45.6	0	46.17	-	-	74	-27.83	89	223	V
			* 7.585667	44.65	ADR	35.9	-45.62	0	34.93	54	-19.07	-	-	89	223	V
11be (242T / Highest PSD)	5270 High Index)	6 + 5	9.70283	56.4	PK-U	36.9	-45.69	0	47.61	-	-	68.2	-20.59	232	270	H
			9.704241	44.53	ADR	36.9	-45.67	0	35.76	-	-	-	-	232	270	H
			2.620374	60.03	PK-U	32.5	-49.72	0	42.81	-	-	68.2	-25.39	169	335	H
			2.65396	48.45	ADR	32.6	-49.52	0	31.53	-	-	-	-	169	335	H
			2.619408	59.89	PK-U	32.4	-49.71	0	42.58	-	-	68.2	-25.62	329	383	V
			2.613968	48.3	ADR	32.4	-49.72	0	30.98	-	-	-	-	329	383	V
			15.82877	53.85	PK-U	41.1	-42	0	52.95	-	-	74	-21.05	119	300	H
			15.825592	42.22	ADR	41.1	-42.01	0	41.31	54	-12.69	-	-	119	300	H
			10.539012	56.31	PK-U	37.9	-45.83	0	48.38	-	-	68.2	-19.82	221	120	H
			10.549772	44.64	ADR	37.8	-45.91	0	36.53	-	-	-	-	221	120	H
	5310 High Index)	6 + 5	15.803507	53.92	PK-U	41.1	-42.12	0	52.9	-	-	74	-21.1	277	304	V
			15.804236	42.35	ADR	41.1	-42.13	0	41.32	54	-12.68	-	-	277	304	V
			10.526566	56.48	PK-U	37.8	-45.59	0	48.69	-	-	68.2	-19.51	347	325	V
			10.54929	44.94	ADR	37.8	-45.89	0	36.85	-	-	-	-	347	325	V
			2.643265	48.96	ADR	32.7	-49.84	0	31.82	-	-	-	-	146	221	V
			2.644608	48.88	ADR	32.7	-49.86	0	31.72	-	-	-	-	106	332	H
			2.644735	61.36	PK-U	32.7	-49.86	0	44.2	-	-	68.2	-24	146	221	V
			2.64596	60.72	PK-U	32.7	-49.82	0	43.6	-	-	68.2	-24.6	106	332	H
			10.623016	45.61	ADR	37.5	-45.72	0	37.39	54	-16.61	-	-	255	257	V
			10.623568	45.53	ADR	37.5	-45.7	0	37.33	54	-16.67	-	-	62	361	H
11be ((106+26)T / Highest PSD)	5270	6 + 5	10.623628	56.99	PK-U	37.5	-45.7	0	48.79	-	-	74	-25.21	255	257	V
			10.624059	56.8	PK-U	37.5	-45.69	0	48.61	-	-	74	-25.39	62	361	H
			15.936543	45.4	ADR	40.8	-44.63	0	41.57	54	-12.43	-	-	122	390	V
			15.936651	56.85	PK-U	40.8	-44.63	0	53.02	-	-	74	-20.98	122	390	V
			15.938289	44.93	ADR	40.8	-44.61	0	41.12	54	-12.88	-	-	231	189	H
			15.938389	57.07	PK-U	40.8	-44.61	0	53.26	-	-	74	-20.74	231	189	H
			2.656719	60.21	PK-U	32.6	-49.55	0	43.26	-	-	74	-30.74	285	210	H
			2.654946	48.35	ADR	32.6	-49.54	0	31.41	-	-	-	-	285	210	H
			2.626651	60.21	PK-U	32.5	-49.72	0	42.99	-	-	68.2	-25.21	349	230	V
			2.618344	48.29	ADR	32.4	-49.72	0	30.97	-	-	-	-	349	230	V
	5310 Mid Index)	6 + 5	10.529475	57.29	PK-U	37.8	-45.65	0	49.44	-	-	68.2	-18.76	13	227	H
			10.546381	44.8	ADR	37.8	-45.81	0	36.79	-	-	-	-	13	227	H
			15.81005	54.06	PK-U	41.1	-42.05	0	53.11	-	-	74	-20.89	111	259	H
			15.815588	42.16	ADR	41.1	-42.01	0	41.25	54	-12.75	-	-	111	259	H
			10.535554	56.23	PK-U	37.9	-45.82	0	48.31	-	-	68.2	-19.89	360	180	V
			10.552118	44.5	ADR	37.8	-45.91	0	36.39	-	-	-	-	360	180	V
			15.801138	53.98	PK-U	41.1	-42.15	0	52.93	-	-	74	-21.07	28	253	V
			15.823791	42.21	ADR	41.1	-42.02	0	41.29	54	-12.71	-	-	28	253	V
			2.648909	48.74	ADR	32.7	-49.88	0	31.56	-	-	-	-	258	260	H
			2.651789	60.09	PK-U	32.7	-49.84	0	42.95	-	-	68.2	-25.25	258	260	H
	5310 Mid Index)	6 + 5	2.653222	48.22	ADR	32.7	-49.84	0	31.08	-	-	-	-	42	311	V
			2.65434	60.79	PK-U	32.7	-49.85	0	43.64	-	-	68.2	-24.56	42	311	V
			10.622742	45.58	ADR	37.5	-45.73	0	37.35	54	-16.65	-	-	316	223	V
			10.622812	57.95	PK-U	37.5	-45.73	0	49.72	-	-	74	-24.28	316	223	V
			10.625058	45.53	ADR	37.5	-45.73	0	37.3	54	-16.7	-	-	293	119	H
			10.626534	56.78	PK-U	37.5	-45.61	0	48.67	-	-	74	-25.33	293	119	H
			15.933929	56.32	PK-U	40.8	-44.63	0	52.49	-	-	74	-21.51	274	309	V
			15.934051	45.32	ADR	40.8	-44.63	0	41.49	54	-12.51	-	-	274	309	V
			15.935173	56.43	PK-U	40.8	-44.66	0	52.57	-	-	74	-21.43	214	160	H
			15.937206	44.93	ADR	40.8	-44.62	0	41.11	54	-12.89	-	-	214	160	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5290	6 + 5	2.187823	57.97	PK-U	31.7	0	-46.6	43.07	-	-	68.2	-25.13	360	101	H
			2.19023	45.95	ADR	31.7	0	-46.6	31.05	-	-	-	-	360	101	H
			2.183263	57.25	PK-U	31.7	0	-46.53	42.42	-	-	68.2	-25.78	360	101	V
			2.182482	45.79	ADR	31.7	0	-46.55	30.94	-	-	-	-	360	101	V
			* 8.331361	54.26	PK-U	35.9	0	-42.76	47.4	-	-	74	-26.6	360	101	H
			* 8.328568	42.31	ADR	35.9	0	-42.8	35.41	54	-18.59	-	-	360	101	H
			* 12.574757	53.57	PK-U	38.7	0	-40.9	51.37	-	-	74	-22.63	360	101	H
			* 12.572842	41.32	ADR	38.7	0	-41.07	38.95	54	-15.05	-	-	360	101	H
			* 8.32958	53.62	PK-U	35.9	0	-42.8	46.72	-	-	74	-27.28	360	101	V
			* 8.327883	42.22	ADR	35.9	0	-42.8	35.32	54	-18.68	-	-	360	101	V
			* 12.575511	53.82	PK-U	38.7	0	-40.95	51.57	-	-	74	-22.43	360	101	V
			* 12.576355	41.24	ADR	38.7	0	-40.96	38.98	54	-15.02	-	-	360	101	V
11be (484T/ Highest PSD)	5290 (Low Index)	6 + 5	* 2.759403	58.89	PK-U	32.3	0	-49.24	41.95	-	-	74	-32.05	209	248	H
			* 2.759834	47.52	ADR	32.3	0	-49.24	30.58	54	-23.42	-	-	209	248	H
			* 2.761755	58.98	PK-U	32.3	0	-49.26	42.02	-	-	74	-31.98	261	238	V
			* 2.762529	47.7	ADR	32.3	0	-49.27	30.73	54	-23.27	-	-	261	238	V
			* 15.905394	51.53	PK-U	40.7	0	-40.84	51.39	-	-	74	-22.61	19	373	H
			* 15.905912	40.28	ADR	40.7	0	-40.87	40.11	54	-13.89	-	-	19	373	H
			* 15.905441	51.76	PK-U	40.7	0	-40.84	51.62	-	-	74	-22.38	16	396	V
			* 15.906624	40.08	ADR	40.7	0	-40.86	39.92	54	-14.08	-	-	16	396	V
			10.177386	43.99	ADR	37.4	0	-45.2	36.19	-	-	-	-	344	297	V
			10.17989	55.48	PK-U	37.4	0	-45.2	47.68	-	-	68.2	-20.52	15	355	H
			10.179896	55.17	PK-U	37.4	0	-45.2	47.37	-	-	68.2	-20.83	344	297	V
			10.180428	44.14	ADR	37.4	0	-45.2	36.34	-	-	-	-	15	355	H
11be (52T / Highest PSD)	5290 (High Index)	6 + 5	1.859043	61.15	PK-U	30.8	0	-50.26	41.69	-	-	68.2	-26.51	187	162	H
			1.862479	49.69	ADR	30.8	0.17	-50.27	30.39	-	-	-	-	187	162	H
			1.86639	61.07	PK-U	30.9	0	-50.26	41.71	-	-	68.2	-26.49	143	202	V
			1.868054	49.47	ADR	30.9	0.17	-50.25	30.29	-	-	-	-	143	202	V
			2.974788	59.03	PK-U	32.7	0	-48.2	43.53	-	-	68.2	-24.67	219	179	H
			2.978149	47.14	ADR	32.7	0.17	-48.16	31.85	-	-	-	-	219	179	H
			2.981588	58.58	PK-U	32.7	0	-48.2	43.08	-	-	68.2	-25.12	67	163	V
			2.98169	47.18	ADR	32.7	0.17	-48.2	31.85	-	-	-	-	67	163	V
			10.391047	53.62	PK-U	37.6	0	-44.33	46.89	-	-	68.2	-21.31	67	177	H
			10.391112	55.2	PK-U	37.6	0	-44.32	48.48	-	-	68.2	-19.72	348	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5250	6 + 5	1.814526	50.24	ADR	30.3	-50.16	0	30.52	-	-	-	-	22	349	V
			1.815803	61.83	PK-U	30.3	-50.17	0	41.96	-	-	68.2	-26.24	22	349	V
			1.81646	50.1	ADR	30.3	-50.17	0	30.37	-	-	-	-	18	111	H
			1.81742	61.91	PK-U	30.4	-50.16	0	42.15	-	-	68.2	-26.05	18	111	H
			12.397785	51.28	PK-U	38.8	-40.82	0	49.26	-	-	74	-24.74	41	308	H
			12.397837	39.56	ADR	38.8	-40.82	0	37.68	54	-16.46	-	-	41	308	H
			12.403478	50.77	PK-U	38.8	-40.77	0	48.8	-	-	74	-25.2	163	252	V
			12.403897	39.53	ADR	38.8	-40.74	0	37.73	54	-16.41	-	-	163	252	V
			16.662279	49.03	PK-U	41.4	-40.73	0	49.7	-	-	68.2	-18.5	124	218	V
			16.663119	49.96	PK-U	41.4	-40.7	0	50.66	-	-	68.2	-17.54	99	287	H
			16.663341	37.33	ADR	41.4	-40.71	0	38.16	-	-	-	-	124	218	V
			16.663891	38.14	ADR	41.4	-40.73	0	38.95	-	-	-	-	99	287	H
11be (242T / highest PSD)	5250 (Mid Index)	6 + 5	* 2800.83	57.96	PK-U	32.3	-47.25	0	43.01	-	-	74	-30.99	348	287	H
			* 2808.924	46.31	ADR	32.4	-47.22	0.1	31.59	54	-22.41	-	-	348	287	H
			* 7260.679	55.42	PK-U	35.3	-44.39	0	46.33	-	-	74	-27.67	28	153	H
			* 7264.03	43.57	ADR	35.3	-44.42	0.1	34.55	54	-19.45	-	-	28	153	H
			3379.58	44.25	ADR	32.6	-45.54	0.1	31.41	-	-	-	-	194	221	V
			3395.78	55.92	PK-U	32.6	-45.34	0	43.18	-	-	68.2	-25.02	194	221	V
			7008.333	43.37	ADR	35.5	-44.33	0.1	34.64	-	-	-	-	38	189	V
			7010.626	55	PK-U	35.5	-44.43	0	46.07	-	-	68.2	-22.13	38	189	V
			10076.444	54.6	PK-U	37.3	-42.37	0	49.53	-	-	68.2	-18.67	50	190	H
			10095.359	42.38	ADR	37.3	-42.84	0.1	36.94	-	-	-	-	50	190	H
			10193.513	42.65	ADR	37.3	-41.23	0.1	38.82	-	-	-	-	343	214	V
			10224.411	54.81	PK-U	37.4	-41.05	0	51.16	-	-	68.2	-17.04	343	214	V
11be (52T / highest PSD)	5250 (High Index)	6 + 5	* 2493.351	46.54	PK-U	32.4	-26.39	0	52.55	-	-	74	-21.45	70	371	H
			* 2488.433	34.8	ADR	32.4	-26.33	0.2	41.07	54	-12.93	-	-	299	160	V
			* 11336.712	56.64	PK-U	38.2	-44.75	0	50.09	-	-	74	-23.91	316	376	H
			* 11339.417	45.12	ADR	38.2	-44.79	0.2	38.73	54	-15.27	-	-	316	376	H
			* 8488.97	55.63	PK-U	36	-45.47	0	46.16	-	-	74	-27.84	107	126	V
			* 8498.743	44.48	ADR	36	-45.4	0.2	35.28	54	-18.72	-	-	107	126	V
			* 11323.412	56.34	PK-U	38.2	-44.69	0	49.85	-	-	74	-24.15	333	197	V
			* 11314.029	44.82	ADR	38.2	-44.52	0.2	38.7	54	-15.3	-	-	333	197	V
			2510.393	34.69	ADR	32.4	-26.41	0.2	40.88	-	-	-	-	70	371	H
			2511.002	46.15	PK-U	32.4	-26.42	0	52.13	-	-	68.2	-16.07	299	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5260MHz)

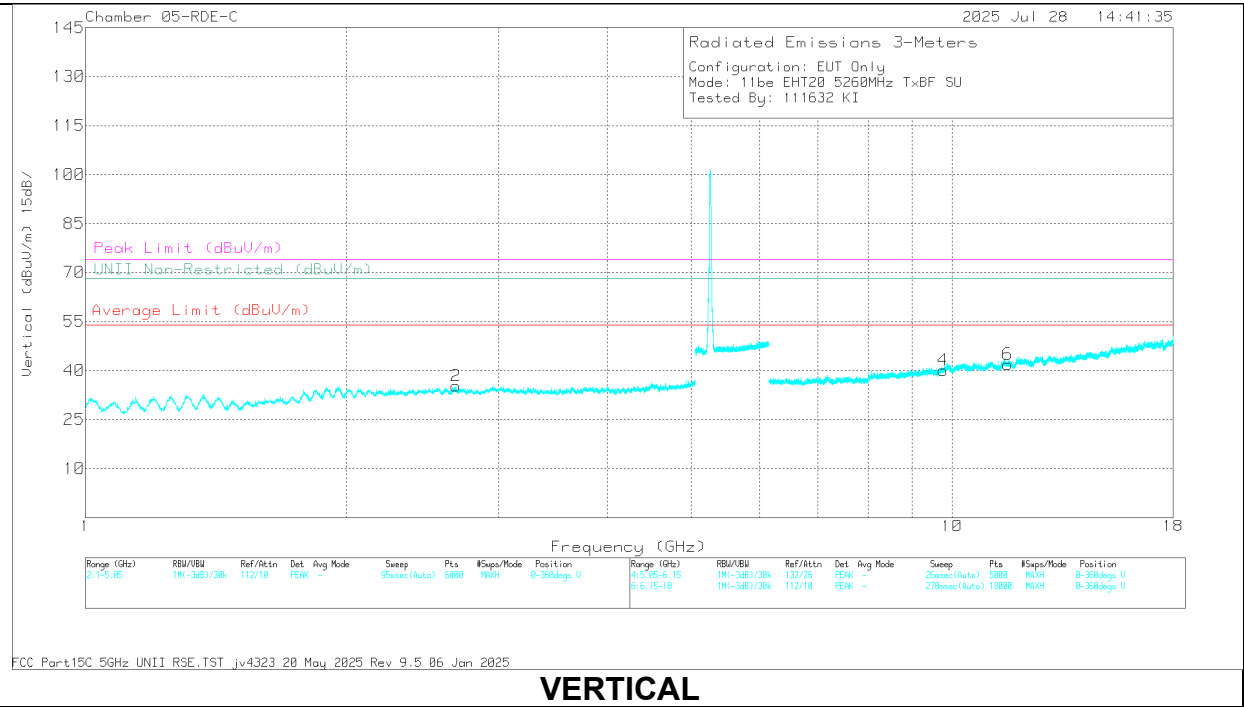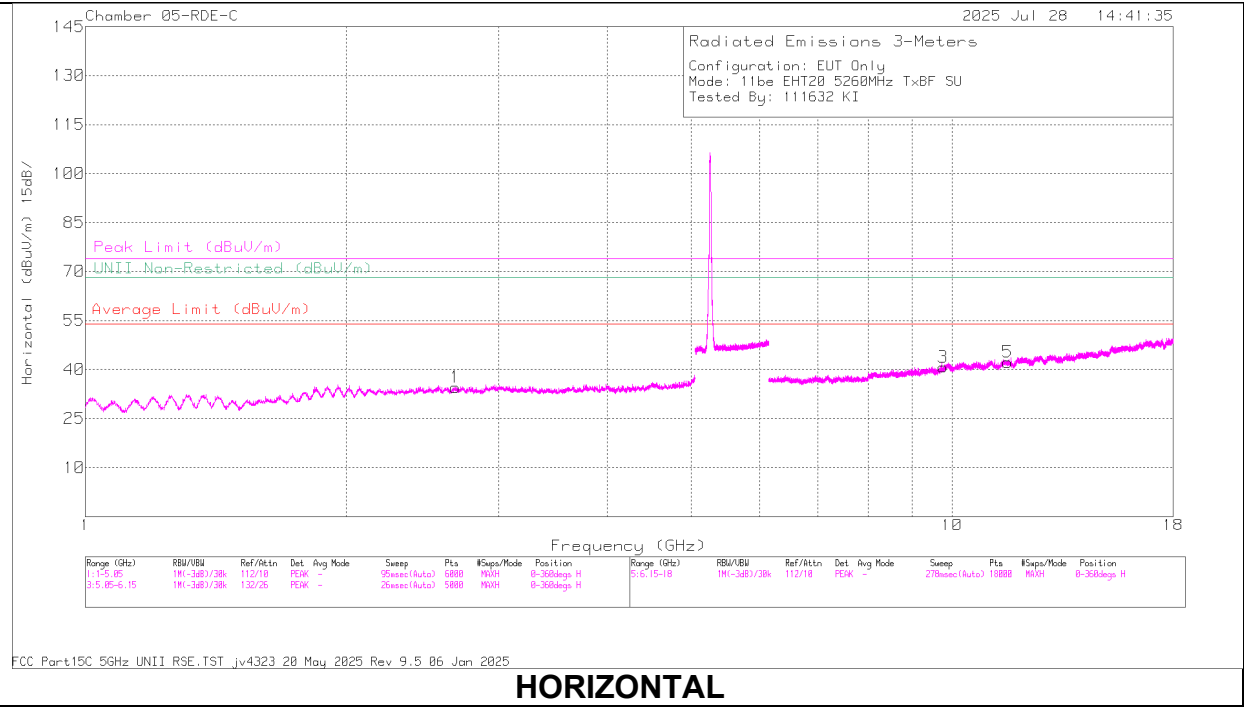

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.665406	49.12	ADR	32.6	-48.95	0	32.77	54	-21.23	-	-	322	286	H
1	2.674946	61.61	PK-U	32.6	-48.86	0	45.35	-	-	74	-28.65	322	286	H
2	2.675651	49.21	ADR	32.6	-48.82	0	32.99	54	-21.01	-	-	342	284	V
2	2.676858	61.01	PK-U	32.6	-48.89	0	44.72	-	-	74	-29.28	342	284	V
4	9.757316	47.74	ADR	37	-45.77	0	38.97	-	-	-	-	15	196	V
4	9.769365	59.8	PK-U	37	-45.83	0	50.97	-	-	68.2	-17.23	15	196	V
3	9.777311	59.4	PK-U	37	-45.78	0	50.62	-	-	68.2	-17.58	324	118	H
3	9.786227	47.77	ADR	37	-45.78	0	38.99	-	-	-	-	324	118	H
5	11.590209	57.85	PK-U	38.3	-43.73	0	52.42	-	-	74	-21.58	200	255	V
5	11.598497	57.92	PK-U	38.3	-43.86	0	52.36	-	-	74	-21.64	281	253	H
6	11.61123	46.31	ADR	38.3	-43.81	0	40.8	54	-13.2	-	-	281	253	H
6	11.615036	46.26	ADR	38.3	-43.97	0	40.59	54	-13.41	-	-	200	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.17. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt r/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5500	6	* 5.46	58.35	Pk	35.2	-38.01	0	55.54	-	-	68.2	-12.66	35	118	H	
			* 5.426666	59.96	Pk	35.1	-38.02	0	57.04	-	-	74	-16.96	35	118	H	
			* 5.46	46.75	RMS	35.2	-38.01	0	43.94	54	-10.06	-	-	35	118	H	
			* 5.443577	47.63	RMS	35.1	-38.01	0	44.72	54	-9.28	-	-	35	118	H	
			* 5.443577	47.63	RMS	35.1	-38.01	0	44.72	54	-9.28	-	-	35	118	H	
			5.469354	66.31	Pk	35.2	-38.02	0	63.49	-	-	68.2	-4.71	35	118	H	
			5.47	63.41	Pk	35.2	-38.01	0	60.6	-	-	68.2	-7.6	35	118	H	
			5.47	48.56	RMS	35.2	-38.01	0	45.75	-	-	-	-	35	118	H	
			* 5.46	57.37	Pk	35.2	-38.01	0	54.56	-	-	68.2	-13.64	34	121	V	
			* 5.454621	59.5	Pk	35.1	-38.04	0	56.56	-	-	74	-17.44	34	121	V	
			* 5.46	47.03	RMS	35.2	-38.01	0	44.22	54	-9.78	-	-	34	121	V	
			* 5.438244	47.67	RMS	35.1	-38.06	0	44.71	54	-9.29	-	-	34	121	V	
			* 5.438244	47.67	RMS	35.1	-38.06	0	44.71	54	-9.29	-	-	34	121	V	
			5.46791	66.31	Pk	35.2	-38.02	0	63.49	-	-	68.2	-4.71	34	121	V	
			5.47	64.86	Pk	35.2	-38.01	0	62.05	-	-	68.2	-6.15	34	121	V	
			5.47	48.34	RMS	35.2	-38.01	0	45.53	-	-	-	-	34	121	V	
			5.725	64.44	Pk	35	-37.21	0	62.23	-	-	68.2	-5.97	80	118	H	
			5.725128	64.8	Pk	35	-37.21	0	62.59	-	-	68.2	-5.61	80	118	H	
			5.725	63.28	Pk	35	-37.21	0	61.07	-	-	68.2	-7.13	351	113	V	
			5.725128	65.3	Pk	35	-37.21	0	63.09	-	-	68.2	-5.11	351	113	V	
	5500	5	* 5.46	58.49	Pk	35.2	-38.01	0	55.68	-	-	68.2	-12.52	147	151	H	
			* 5.45991	61.12	Pk	35.2	-38.01	0	58.31	-	-	74	-15.69	147	151	H	
			* 5.46	46.8	RMS	35.2	-38.01	0	43.99	54	-10.01	-	-	147	151	H	
			* 5.455088	47.71	RMS	35.1	-38.05	0	44.76	54	-9.24	-	-	147	151	H	
			* 5.455088	47.71	RMS	35.1	-38.05	0	44.76	54	-9.24	-	-	147	151	H	
			5.469799	65.83	Pk	35.2	-38.01	0	63.02	-	-	68.2	-5.18	147	151	H	
			5.47	64.61	Pk	35.2	-38.01	0	61.8	-	-	68.2	-6.4	147	151	H	
			5.47	49.14	RMS	35.2	-38.01	0	46.33	-	-	-	-	147	151	H	
			* 5.46	57.36	Pk	35.2	-38.01	0	54.55	-	-	68.2	-13.65	117	121	V	
			* 5.458888	59.26	Pk	35.2	-38.01	0	56.45	-	-	74	-17.55	117	121	V	
			* 5.46	46.24	RMS	35.2	-38.01	0	43.43	54	-10.57	-	-	117	121	V	
			* 5.458732	47.41	RMS	35.2	-38.02	0	44.59	54	-9.41	-	-	117	121	V	
			* 5.458732	47.41	RMS	35.2	-38.02	0	44.59	54	-9.41	-	-	117	121	V	
			5.46931	65.21	Pk	35.2	-38.02	0	62.39	-	-	68.2	-5.81	117	121	V	
			5.47	63.65	Pk	35.2	-38.01	0	60.84	-	-	68.2	-7.36	117	121	V	
			5.47	48.35	RMS	35.2	-38.01	0	45.54	-	-	-	-	117	121	V	
			5.725	62.53	Pk	35	-37.21	0	60.32	-	-	68.2	-7.88	142	169	H	
			5.725024	63.28	Pk	35	-37.21	0	61.07	-	-	68.2	-7.13	142	169	H	
			5.725	64.9	Pk	35	-37.21	0	62.69	-	-	68.2	-5.51	32	123	V	
			5.725644	65.09	Pk	35	-37.22	0	62.87	-	-	68.2	-5.33	32	123	V	
HT40	5510	6	* 5.3460	45.07	Pk	34.5	-23.95	0	55.62	-	-	68.2	-12.58	229	205	H	
			* 5.456399	51.08	Pk	34.5	-23.95	0	61.63	-	-	74	-12.37	229	205	H	
			* 5.460	33.53	RMS	34.5	-23.95	0	44.08	54	-9.92	-	-	229	205	H	
			* 5.459466	34.15	RMS	34.5	-23.93	0	44.72	54	-9.28	-	-	229	205	H	
			* 5.459466	34.15	RMS	34.5	-23.93	0	44.72	54	-9.28	-	-	229	205	H	
			5.468954	52.26	Pk	34.5	-23.86	0	62.9	-	-	68.2	-5.3	229	205	H	
			5.47	51.57	Pk	34.5	-23.84	0	62.23	-	-	68.2	-5.97	229	205	H	
			5.47	34.47	RMS	34.5	-23.84	0	45.13	-	-	-	-	229	205	H	
			* 5.460	47.12	Pk	34.5	-23.95	0	57.67	-	-	68.2	-10.53	194	111	V	
			* 5.45911	50.64	Pk	34.5	-23.92	0	61.22	-	-	74	-12.78	194	111	V	
			* 5.460	32.34	RMS	34.5	-23.95	0	42.89	54	-11.11	-	-	194	111	V	
			* 5.458821	33.7	RMS	34.5	-23.93	0	44.27	54	-9.73	-	-	194	111	V	
			* 5.458821	33.7	RMS	34.5	-23.93	0	44.27	54	-9.73	-	-	194	111	V	
			5.46991	52.66	Pk	34.5	-23.84	0	63.32	-	-	68.2	-4.88	194	111	V	
			5.47	50.64	Pk	34.5	-23.84	0	61.3	-	-	68.2	-6.9	194	111	V	
			5.47	34.35	RMS	34.5	-23.84	0	45.01	-	-	-	-	194	111	V	
			5670	5.725	61.97	Pk	34.5	-37.07	0	59.4	-	-	68.2	-8.8	3	192	H
				5.72685	65.4	Pk	34.5	-37.03	0	62.87	-	-	68.2	-5.33	3	192	H
				5.725	61.65	Pk	34.5	-37.07	0	59.08	-	-	68.2	-9.12	335	154	V
				5.726282	66.12	Pk	34.5	-37.05	0	63.57	-	-	68.2	-4.63	335	154	V
	* 5.460	59.24		Pk	34.6	-35.79	0	58.05	-	-	68.2	-10.15	137	214	H		
	* 5458.888	60.83		Pk	34.6	-35.96	0	59.47	-	-	74	-14.53	137	214	H		
	* 5.460	45.63		RMS	34.6	-35.79	0	44.44	54	-9.56	-	-	137	214	H		
	* 5.458532	46.78		RMS	34.6	-35.97	0	45.41	54	-8.59	-	-	137	214	H		
	* 5.458532	46.78		RMS	34.6	-35.97	0	45.41	54	-8.59	-	-	137	214	H		
	5.468954	64.32		Pk	34.6	-35.84	0	63.08	-	-	68.2	-5.12	137	214	H		
	5510	5.47	60.74	Pk	34.6	-35.86	0	59.48	-	-	68.2	-8.72	137	214	H		
		5.47	46.12	RMS	34.6	-35.86	0	44.86	-	-	-	-	137	214	H		
		* 5.460	47.15	Pk	34.6	-23.31	0	58.44	-	-	68.2	-9.76	94	101	V		
		* 5.459954	47.65	Pk	34.6	-23.32	0	58.93	-	-	74	-15.07	94	101	V		
		* 5.460	30.39	RMS	34.6	-23.31	0	41.68	54	-12.32	-	-	94	101	V		
		* 5.458332	31.98	RMS	34.6	-23.4	0	43.18	54	-10.82	-	-	94	101	V		
		* 5.458332	31.98	RMS	34.6	-23.4	0	43.18	54	-10.82	-	-	94	101	V		
		5.469799	52.35	Pk	34.6	-23.26	0	63.69	-	-	68.2	-4.51	94	101	V		
		5.47	48.84	Pk	34.6	-23.27	0	60.17	-	-	68.2	-8.03	94	101	V		
		5.47	32.12	RMS	34.6	-23.27	0	43.45	-	-	-	-	94	101	V		
	5670	5.725	59.34	Pk	34.5	-37.07	0	56.77	-	-	68.2	-11.43	38	208	H		
		5.727883	62.06	Pk	34.5	-37.04	0	59.52	-	-	68.2	-8.68	38	208	H		
		5.725	57.73	Pk	34.5	-37.07	0	55.16	-	-	68.2	-13.04	20	352	V		
		5.776863	59.79	Pk	34.6	-36.75	0	57.64	-	-	68.2	-10.56	20	352	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
VHT80	5530	6	* 5.46	38.83	Pk	34.4	-16.6	0	56.63	-	-	68.2	-11.57	319	164	H			
			* 5.383954	41.41	Pk	34.3	-16.7	0	59.01	-	-	74	-14.99	319	164	H			
			* 5.46	27.68	RMS	34.4	-16.6	0	45.48	54	-8.52	-	-	319	164	H			
			* 5.369677	29.23	RMS	34.3	-16.7	0	46.83	54	-7.17	-	-	319	164	H			
			* 5.369677	29.23	RMS	34.3	-16.7	0	46.83	54	-7.17	-	-	319	164	H			
			5.469164	43.73	Pk	34.3	-16.5	0	61.53	-	-	68.2	-6.67	319	164	H			
			5.47	41.54	Pk	34.3	-16.5	0	59.34	-	-	68.2	-8.86	319	164	H			
			5.47	27.51	RMS	34.3	-16.5	0	45.31	-	-	-	-	319	164	H			
			* 5.46	39.43	Pk	34.4	-16.6	0	57.23	-	-	68.2	-10.97	305	222	V			
			* 5.458788	41.6	Pk	34.3	-16.6	0	59.3	-	-	74	-14.7	305	222	V			
			* 5.46	27.44	RMS	34.4	-16.6	0	45.24	54	-8.76	-	-	305	222	V			
			* 5.357076	29.51	RMS	34.3	-16.9	0	46.91	54	-7.09	-	-	305	222	V			
			* 5.357076	29.51	RMS	34.3	-16.9	0	46.91	54	-7.09	-	-	305	222	V			
			5.468789	45.33	Pk	34.3	-16.5	0	63.13	-	-	68.2	-5.07	305	222	V			
			5.47	43.75	Pk	34.3	-16.5	0	61.55	-	-	68.2	-6.65	305	222	V			
			5.47	27.97	RMS	34.3	-16.5	0	45.77	-	-	-	-	305	222	V			
			5530	5	5.453532	64.19	Pk	34.6	-38.81	0	59.98	-	-	74	-14.02	329	184	H	
					5.458399	48.77	RMS	34.6	-38.73	0	44.64	54	-9.36	-	-	329	184	H	
					5.458399	48.77	RMS	34.6	-38.73	0	44.64	54	-9.36	-	-	329	184	H	
					5.46	59.38	Pk	34.6	-38.71	0	55.27	-	-	68.2	-12.93	329	184	H	
	5.46	47.51			RMS	34.6	-38.71	0	43.4	54	-10.6	-	-	329	184	H			
	5.469932	67.18			Pk	34.6	-38.76	0	63.02	-	-	68.2	-5.18	329	184	H			
	5.47	64.82			Pk	34.6	-38.76	0	60.66	-	-	68.2	-7.54	329	184	H			
	5.47	48.21			RMS	34.6	-38.76	0	44.05	-	-	-	-	329	184	H			
	5.458999	48.66			RMS	34.6	-38.68	0	44.58	54	-9.42	-	-	282	103	V			
	5.458999	48.66			RMS	34.6	-38.68	0	44.58	54	-9.42	-	-	282	103	V			
	5.459488	61.85			Pk	34.6	-38.69	0	57.76	-	-	74	-16.24	282	103	V			
	5.46	58.26			Pk	34.6	-38.71	0	54.15	-	-	68.2	-14.05	282	103	V			
	5.46	47.22			RMS	34.6	-38.71	0	43.11	54	-10.89	-	-	282	103	V			
	5.469288	66.85			Pk	34.6	-38.77	0	62.68	-	-	68.2	-5.52	282	103	V			
	5.47	65.43			Pk	34.6	-38.76	0	61.27	-	-	68.2	-6.93	282	103	V			
	5.47	48.08			RMS	34.6	-38.76	0	43.92	-	-	-	-	282	103	V			
	VHT160	5570 (Low BE)			6	* 5.46	60.43	Pk	34.6	-34.8	0	60.23	-	-	68.2	-7.97	86	101	H
						* 5.439536	67.59	Pk	34.5	-34.9	0	67.19	-	-	74	-6.81	86	101	H
						* 5.46	39.56	RMS	34.6	-34.8	0.11	39.47	54	-14.53	-	-	86	101	H
						* 5.440511	48.2	RMS	34.5	-34.9	0.11	47.91	54	-6.09	-	-	86	101	H
			* 5.440511	48.2		RMS	34.5	-34.9	0.11	47.91	54	-6.09	-	-	86	101	H		
			5.461713	61.69		Pk	34.6	-34.8	0	61.49	-	-	68.2	-6.71	86	101	H		
			5.47	54.3		Pk	34.6	-34.8	0	54.1	-	-	68.2	-14.1	86	101	H		
			5.47	37.3		RMS	34.6	-34.8	0.11	37.21	-	-	-	-	86	101	H		
* 5.46			62.29	Pk		34.6	-34.8	0	62.09	-	-	68.2	-6.11	54	103	V			
* 5.439761			69.37	Pk		34.5	-34.9	0	68.97	-	-	74	-5.03	54	103	V			
* 5.46			40.17	RMS		34.6	-34.8	0.11	40.08	54	-13.92	-	-	54	103	V			
* 5.439811			49.79	RMS		34.5	-34.9	0.11	49.5	54	-4.5	-	-	54	103	V			
* 5.439811			49.79	RMS		34.5	-34.9	0.11	49.5	54	-4.5	-	-	54	103	V			
5.461188			63.48	Pk		34.6	-34.8	0	63.28	-	-	68.2	-4.92	54	103	V			
5.47			53.79	Pk		34.6	-34.8	0	53.59	-	-	68.2	-14.61	54	103	V			
5.47			38.03	RMS		34.6	-34.8	0.11	37.94	-	-	-	-	54	103	V			
5570 (High BE)			6	5.725		62.69	Pk	34.8	-36.16	0	61.33	-	-	68.2	-6.87	358	106	H	
				5.727135		64.91	Pk	34.8	-36.21	0	63.5	-	-	68.2	-4.7	358	106	H	
				5.725		62.67	Pk	34.8	-36.16	0	61.31	-	-	68.2	-6.89	329	110	V	
				5.727418		63.65	Pk	34.8	-36.24	0	62.21	-	-	68.2	-5.99	329	110	V	
		* 5.46		62.42	Pk	34.6	-34.8	0	62.22	-	-	68.2	-5.98	277	163	H			
		* 5.439561		69.52	Pk	34.5	-34.9	0	69.12	-	-	74	-4.88	277	163	H			
		* 5.46		40.95	RMS	34.6	-34.8	0.11	40.86	54	-13.14	-	-	277	163	H			
		* 5.43676		47.19	RMS	34.5	-34.9	0.11	46.9	54	-7.1	-	-	277	163	H			
		* 5.43676		47.19	RMS	34.5	-34.9	0.11	46.9	54	-7.1	-	-	277	163	H			
		5.461788		63.57	Pk	34.6	-34.8	0	63.37	-	-	68.2	-4.83	277	163	H			
5570 (Low BE)		5	5.47	54.14	Pk	34.6	-34.8	0	53.94	-	-	68.2	-14.26	277	163	H			
			5.47	40.53	RMS	34.6	-34.8	0.11	40.44	-	-	-	-	277	163	H			
			* 5.46	59.52	Pk	34.6	-34.8	0	59.32	-	-	68.2	-8.88	253	101	V			
			* 5.439361	66.28	Pk	34.5	-34.9	0	65.88	-	-	74	-8.12	253	101	V			
			* 5.46	37.82	RMS	34.6	-34.8	0.11	37.73	54	-16.27	-	-	253	101	V			
			* 5.443086	44.17	RMS	34.6	-34.9	0.11	43.98	54	-10.02	-	-	253	101	V			
			* 5.443086	44.17	RMS	34.6	-34.9	0.11	43.98	54	-10.02	-	-	253	101	V			
			5.460763	60.56	Pk	34.6	-34.8	0	60.36	-	-	68.2	-7.84	253	101	V			
			5.47	52.23	Pk	34.6	-34.8	0	52.03	-	-	68.2	-16.17	253	101	V			
			5.47	38.9	RMS	34.6	-34.8	0.11	38.81	-	-	-	-	253	101	V			
5570 (High BE)		5	5.725	61.51	Pk	34.8	-34.1	0	62.21	-	-	68.2	-5.99	106	130	H			
			5.725442	61.48	Pk	34.8	-34.1	0	62.18	-	-	68.2	-6.02	106	130	H			
			5.725	61.99	Pk	34.8	-34.1	0	62.69	-	-	68.2	-5.51	108	127	V			
			5.725761	62.21	Pk	34.8	-34.1	0	62.91	-	-	68.2	-5.29	108	127	V			


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

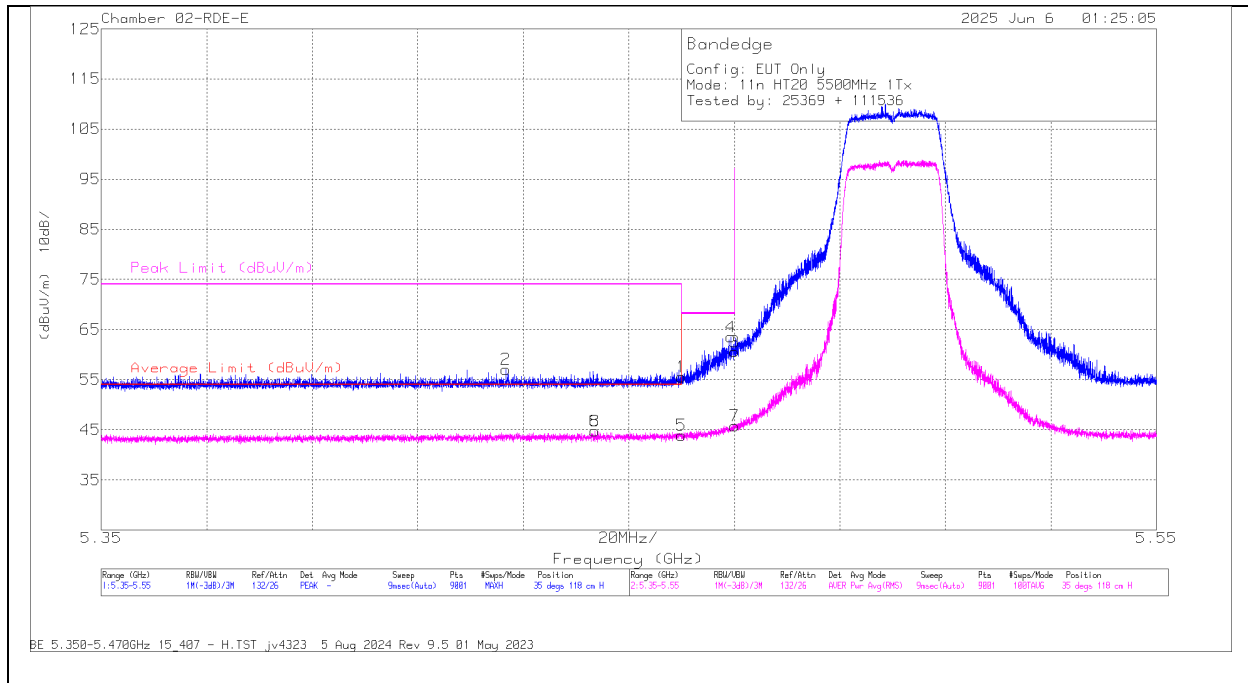

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	58.35	Pk	35.2	0	-38.01	55.54	-	-	68.2	-12.66	35	118	H
2	* 5.426666	59.96	Pk	35.1	0	-38.02	57.04	-	-	74	-16.96	35	118	H
5	* 5.46	46.75	RMS	35.2	0	-38.01	43.94	54	-10.06	-	-	35	118	H
6	* 5.443577	47.63	RMS	35.1	0	-38.01	44.72	54	-9.28	-	-	35	118	H
8	* 5.443577	47.63	RMS	35.1	0	-38.01	44.72	54	-9.28	-	-	35	118	H
4	5.468354	66.31	PK	35.2	0	-38.02	63.49	-	-	68.2	-4.71	35	118	H
3	5.47	63.41	PK	35.2	0	-38.01	60.6	-	-	68.2	-7.6	35	118	H
7	5.47	48.56	RMS	35.2	0	-38.01	45.75	-	-	-	-	35	118	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

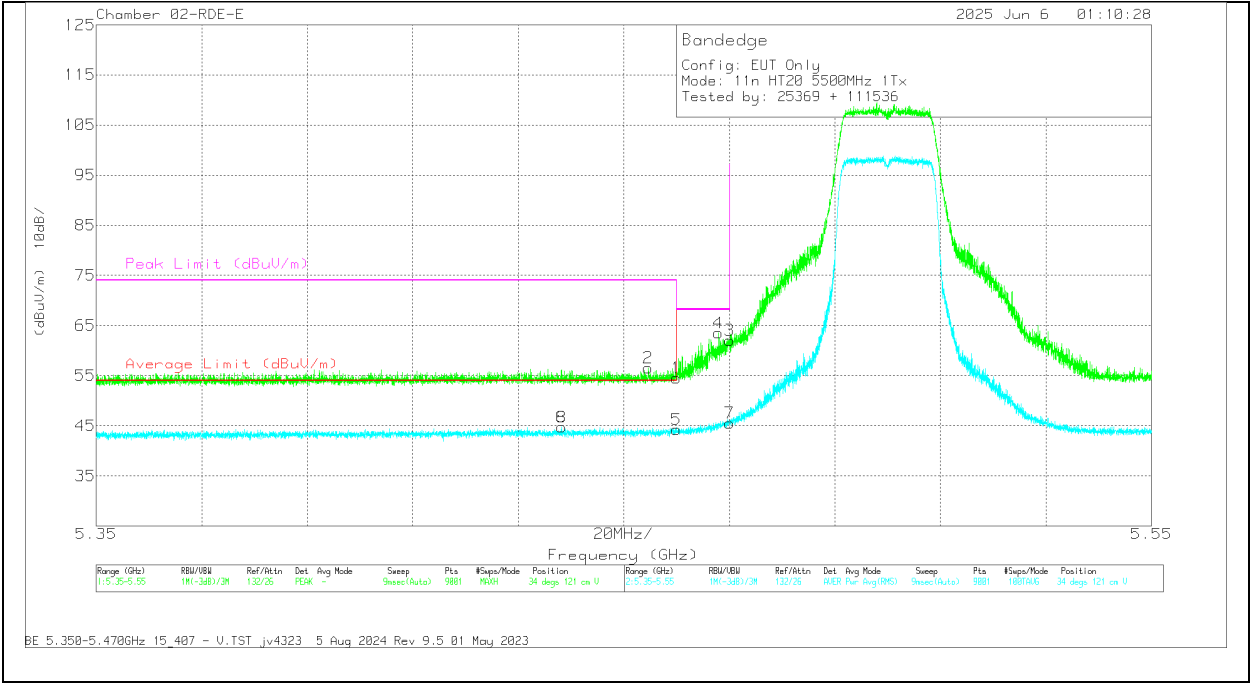


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	57.37	Pk	35.2	0	-38.01	54.56	-	-	68.2	-13.64	34	121	V
2	* 5.454621	59.5	Pk	35.1	0	-38.04	56.56	-	-	74	-17.44	34	121	V
5	* 5.46	47.03	RMS	35.2	0	-38.01	44.22	54	-9.78	-	-	34	121	V
6	* 5.438244	47.67	RMS	35.1	0	-38.06	44.71	54	-9.29	-	-	34	121	V
8	* 5.438244	47.67	RMS	35.1	0	-38.06	44.71	54	-9.29	-	-	34	121	V
4	* 5.46791	66.31	Pk	35.2	0	-38.02	63.49	-	-	68.2	-4.71	34	121	V
3	5.47	64.86	Pk	35.2	0	-38.01	62.05	-	-	68.2	-6.15	34	121	V
7	5.47	48.34	RMS	35.2	0	-38.01	45.53	-	-	-	-	34	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

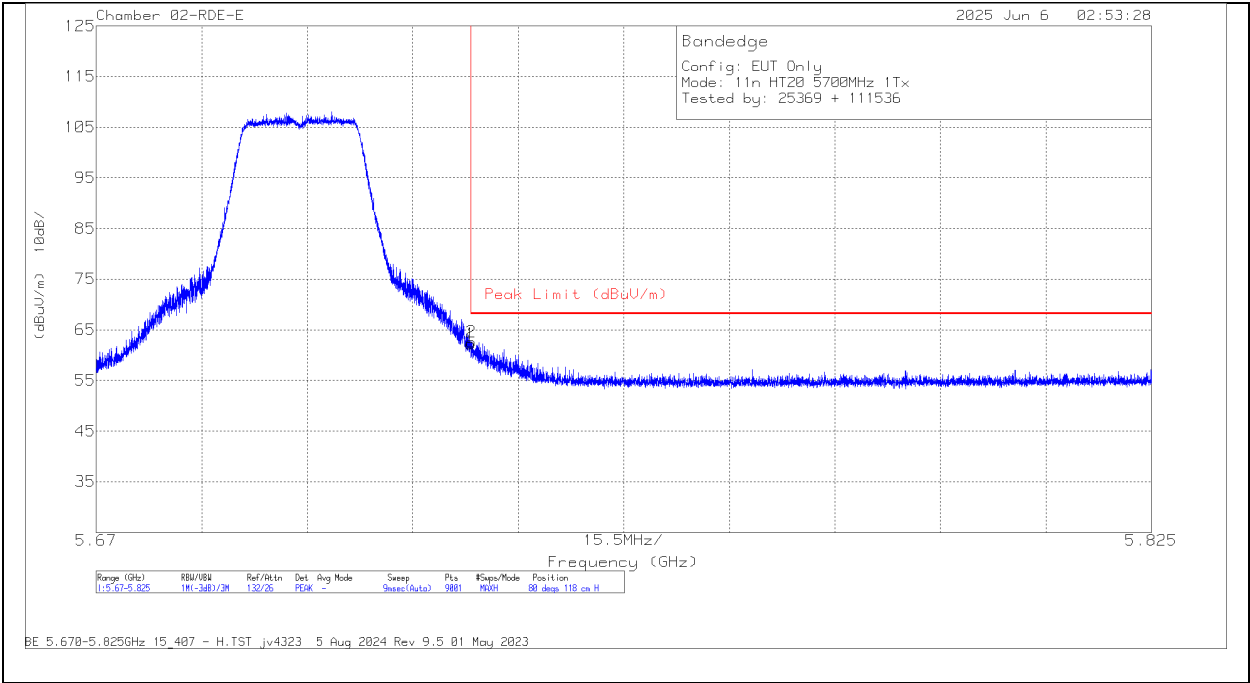


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	64.44	Pk	35	0	-37.21	62.23	68.2	-5.97	80	118	H
2	5.725128	64.8	Pk	35	0	-37.21	62.59	68.2	-5.61	80	118	H

Pk - Peak detector

BANDEGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

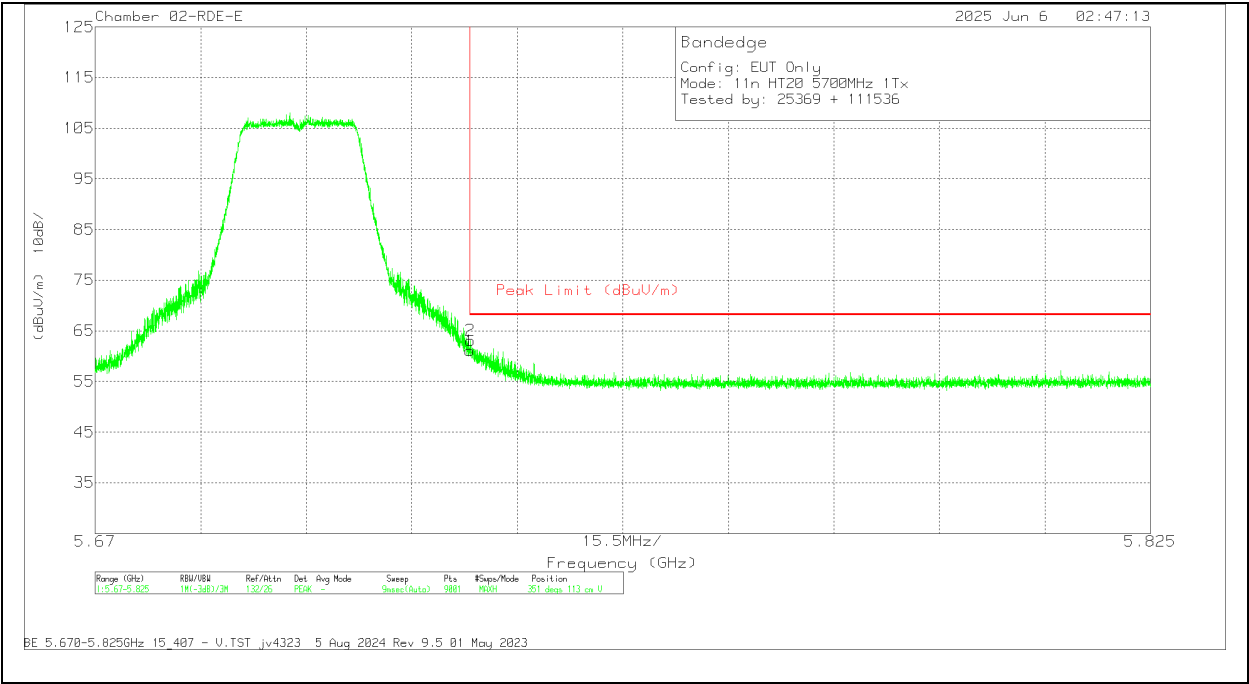

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	63.28	Pk	35	0	-37.21	61.07	68.2	-7.13	351	113	V
2	5.725128	65.3	Pk	35	0	-37.21	63.09	68.2	-5.11	351	113	V

Pk - Peak detector

1.1.18. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/l Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5500	6 + 5	* 5.46	54.55	Pk	34.6	-34.8	0	54.35	-	-	68.2	-13.85	283	101	H	
			* 5.459988	54.8	PK	34.6	-34.8	0	54.6	-	-	74	-19.4	283	101	H	
			* 5.46	40.51	RMS	34.6	-34.8	0	40.31	54	-13.69	-	-	283	101	H	
			* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H	
			* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H	
			5.469664	62.23	Pk	34.6	-34.8	0	62.03	-	-	68.2	-6.17	283	101	H	
			5.47	61.11	PK	34.6	-34.8	0	60.91	-	-	68.2	-7.29	283	101	H	
			5.47	42.97	RMS	34.6	-34.8	0	42.77	-	-	-	-	283	101	H	
			* 5.46	53.24	PK	34.6	-34.8	0	53.04	-	-	68.2	-15.16	241	131	V	
			* 5.459988	54.15	PK	34.6	-34.8	0	53.95	-	-	74	-20.05	241	131	V	
			* 5.46	40.28	RMS	34.6	-34.8	0	40.08	54	-13.92	-	-	241	131	V	
			* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V	
			* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V	
			5.469139	60.69	PK	34.6	-34.8	0	60.49	-	-	68.2	-7.71	241	131	V	
			5.47	57.51	PK	34.6	-34.8	0	57.31	-	-	68.2	-10.89	241	131	V	
			5.47	42.07	RMS	34.6	-34.8	0	41.87	-	-	-	-	241	131	V	
	5700	5.725	61.73	PK	34.9	-36.29	0	60.34	-	-	68.2	-7.86	343	101	H		
		5.725024	63.32	PK	34.9	-36.29	0	61.93	-	-	68.2	-6.27	343	101	H		
		5.725	63.71	PK	34.9	-36.29	0	62.32	-	-	68.2	-5.88	343	132	V		
		5.729261	64.82	PK	34.9	-36.3	0	63.42	-	-	68.2	-4.78	343	132	V		
		5.439732	47.91	RMS	34.6	-38.86	0	43.65	54	-10.35	-	-	39	119	H		
		5.439732	47.91	RMS	34.6	-38.86	0	43.65	54	-10.35	-	-	39	119	H		
HT40	5510	6 + 5	5.459266	61.65	PK	34.6	-38.69	0	57.56	-	-	74	-16.44	39	119	H	
			5.46	58.58	PK	34.6	-38.71	0	54.47	-	-	68.2	-13.73	39	119	H	
			5.46	46.92	RMS	34.6	-38.71	0	42.81	54	-11.19	-	-	39	119	H	
			5.466488	63.83	PK	34.6	-38.79	0	59.64	-	-	68.2	-8.56	39	119	H	
			5.47	62.69	PK	34.6	-38.76	0	58.53	-	-	68.2	-9.67	39	119	H	
			5.47	48.08	RMS	34.6	-38.76	0	43.92	-	-	-	-	39	119	H	
			5.458799	47.89	RMS	34.6	-38.7	0	43.79	54	-10.21	-	-	72	250	V	
			5.458799	47.89	RMS	34.6	-38.7	0	43.79	54	-10.21	-	-	72	250	V	
			5.459732	64.93	PK	34.6	-38.7	0	60.83	-	-	74	-13.17	72	250	V	
			5.46	64.72	PK	34.6	-38.71	0	60.61	-	-	68.2	-7.59	72	250	V	
			5.46	47.48	RMS	34.6	-38.71	0	43.37	54	-10.63	-	-	72	250	V	
			5.468243	67.06	PK	34.6	-38.76	0	62.9	-	-	68.2	-5.3	72	250	V	
			5.47	65.74	PK	34.6	-38.76	0	61.58	-	-	68.2	-6.62	72	250	V	
			5.47	47.11	RMS	34.6	-38.76	0	42.95	-	-	-	-	72	250	V	
			5670	5.725	51.15	PK	34.8	-34.1	0	51.85	-	-	68.2	-16.35	130	255	H
				5.725224	55.21	PK	34.8	-34.1	0	55.91	-	-	68.2	-12.29	130	255	H
				5.725	52.25	PK	34.8	-34.1	0	52.95	-	-	68.2	-15.25	88	135	V
				5.725767	55.01	PK	34.8	-34.1	0	55.71	-	-	68.2	-12.49	88	135	V
	* 5.46	53.22		PK	34.6	-34.8	0	53.02	-	-	68.2	-15.18	303	207	H		
	* 5.457388	60.74		PK	34.6	-34.8	0	60.54	-	-	74	-13.46	303	207	H		
	VHT80	5530	6 + 5	* 5.46	37.71	RMS	34.6	-34.8	0	37.51	54	-16.49	-	-	303	207	H
				* 5.457663	42.68	RMS	34.6	-34.8	0	42.48	54	-11.52	-	-	303	207	H
* 5.457663				42.68	RMS	34.6	-34.8	0	42.48	54	-11.52	-	-	303	207	H	
5.467664				62.87	PK	34.6	-34.8	0	62.67	-	-	68.2	-5.53	303	207	H	
5.47				56.37	PK	34.6	-34.8	0	56.17	-	-	68.2	-12.03	303	207	H	
5.47				39.3	RMS	34.6	-34.8	0	39.1	-	-	-	-	303	207	H	
* 5.46				53.51	PK	34.6	-34.8	0	53.31	-	-	68.2	-14.89	278	106	V	
* 5.457963				61.32	PK	34.6	-34.8	0	61.12	-	-	74	-12.88	278	106	V	
* 5.46				38.59	RMS	34.6	-34.8	0	38.39	54	-15.61	-	-	278	106	V	
* 5.457763				43.95	RMS	34.6	-34.8	0	43.75	54	-10.25	-	-	278	106	V	
* 5.457763				43.95	RMS	34.6	-34.8	0	43.75	54	-10.25	-	-	278	106	V	
5.468364				63.21	PK	34.6	-34.8	0	63.01	-	-	68.2	-5.19	278	106	V	
5.47				56.84	PK	34.6	-34.8	0	56.64	-	-	68.2	-11.56	278	106	V	
5.47				38.76	RMS	34.6	-34.8	0	38.56	-	-	-	-	278	106	V	
VHT160	5570 (Low BE)	6 + 5	* 5.46	58.01	PK	34.6	-34.8	0	57.81	-	-	68.2	-10.39	126	202	H	
			* 5.438486	69.05	PK	34.5	-34.9	0	68.65	-	-	74	-5.35	126	202	H	
			* 5.46	38.85	RMS	34.6	-34.8	0.11	38.76	54	-15.24	-	-	126	202	H	
			* 5.442786	47.99	RMS	34.6	-34.9	0.11	47.8	54	-6.2	-	-	126	202	H	
			* 5.442786	47.99	RMS	34.6	-34.9	0.11	47.8	54	-6.2	-	-	126	202	H	
			5.463414	63.4	PK	34.6	-34.8	0	63.2	-	-	68.2	-5	126	202	H	
			5.47	54.13	PK	34.6	-34.8	0	53.93	-	-	68.2	-14.27	126	202	H	
			5.47	38.87	RMS	34.6	-34.8	0.11	38.78	-	-	-	-	126	202	H	
			* 5.46	56.15	PK	34.6	-34.8	0	55.95	-	-	68.2	-12.25	38	103	V	
			* 5.438661	66.89	PK	34.5	-34.9	0	66.49	-	-	74	-7.51	38	103	V	
			* 5.46	37.64	RMS	34.6	-34.8	0.11	37.55	54	-16.45	-	-	38	103	V	
			* 5.442661	45.01	RMS	34.6	-34.9	0.11	44.82	54	-9.18	-	-	38	103	V	
			* 5.442661	45.01	RMS	34.6	-34.9	0.11	44.82	54	-9.18	-	-	38	103	V	
			5.462839	61.23	PK	34.6	-34.8	0	61.03	-	-	68.2	-7.17	38	103	V	
			5.47	53.43	PK	34.6	-34.8	0	53.23	-	-	68.2	-14.97	38	103	V	
			5.47	38.05	RMS	34.6	-34.8	0.11	37.96	-	-	-	-	38	103	V	
	5570 (High BE)	5.725	62.17	PK	34.8	-34.1	0	62.87	-	-	68.2	-5.33	131	249	H		
		5.725028	62.06	PK	34.8	-34.1	0	62.76	-	-	68.2	-5.44	131	249	H		
		5.725	51.48	PK	34.8	-34.1	0	52.18	-	-	68.2	-16.02	26	393	V		
		5.727705	54.41	PK	34.8	-34.1	0	55.11	-	-	68.2	-13.09	26	393	V		


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

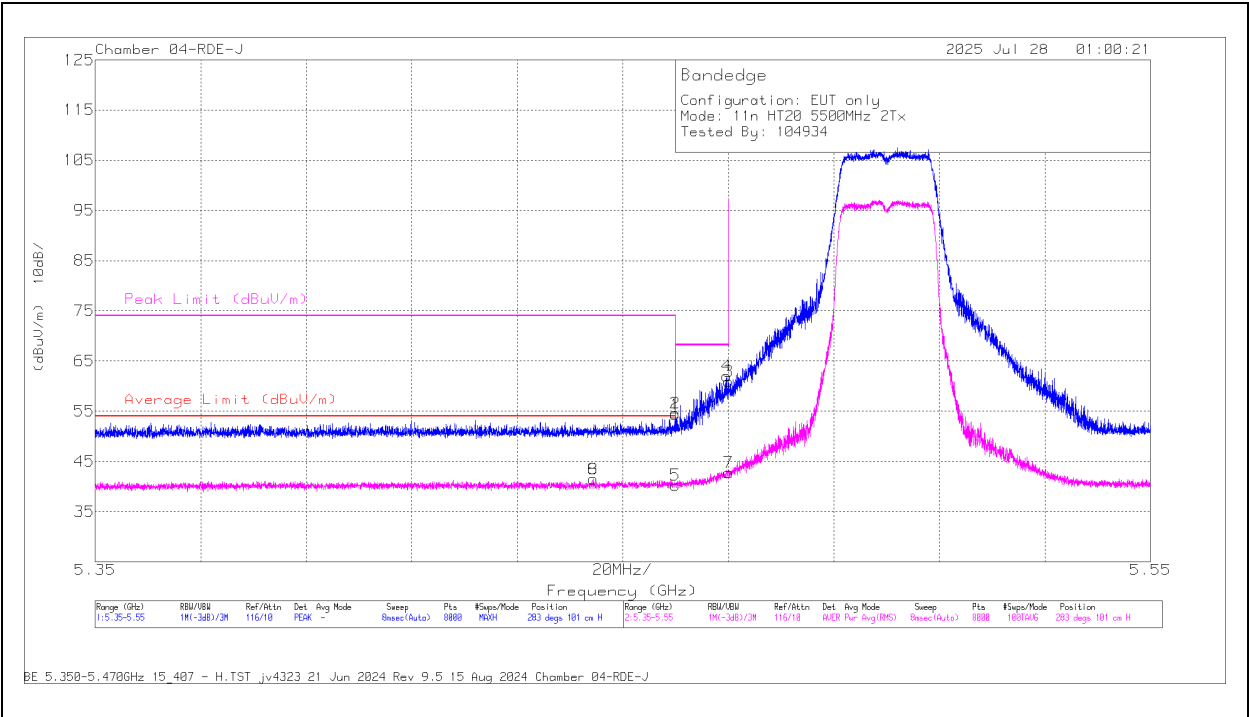


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	54.55	Pk	34.6	-34.8	0	54.35	-	-	68.2	-13.85	283	101	H
2	* 5.459988	54.8	Pk	34.6	-34.8	0	54.6	-	-	74	-19.4	283	101	H
5	* 5.46	40.51	RMS	34.6	-34.8	0	40.31	54	-13.69	-	-	283	101	H
6	* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H
8	* 5.444361	41.76	RMS	34.6	-34.9	0	41.46	54	-12.54	-	-	283	101	H
4	5.469664	62.23	Pk	34.6	-34.8	0	62.03	-	-	68.2	-6.17	283	101	H
3	5.47	61.11	Pk	34.6	-34.8	0	60.91	-	-	68.2	-7.29	283	101	H
7	5.47	42.97	RMS	34.6	-34.8	0	42.77	-	-	-	-	283	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)


VERTICAL RESULT

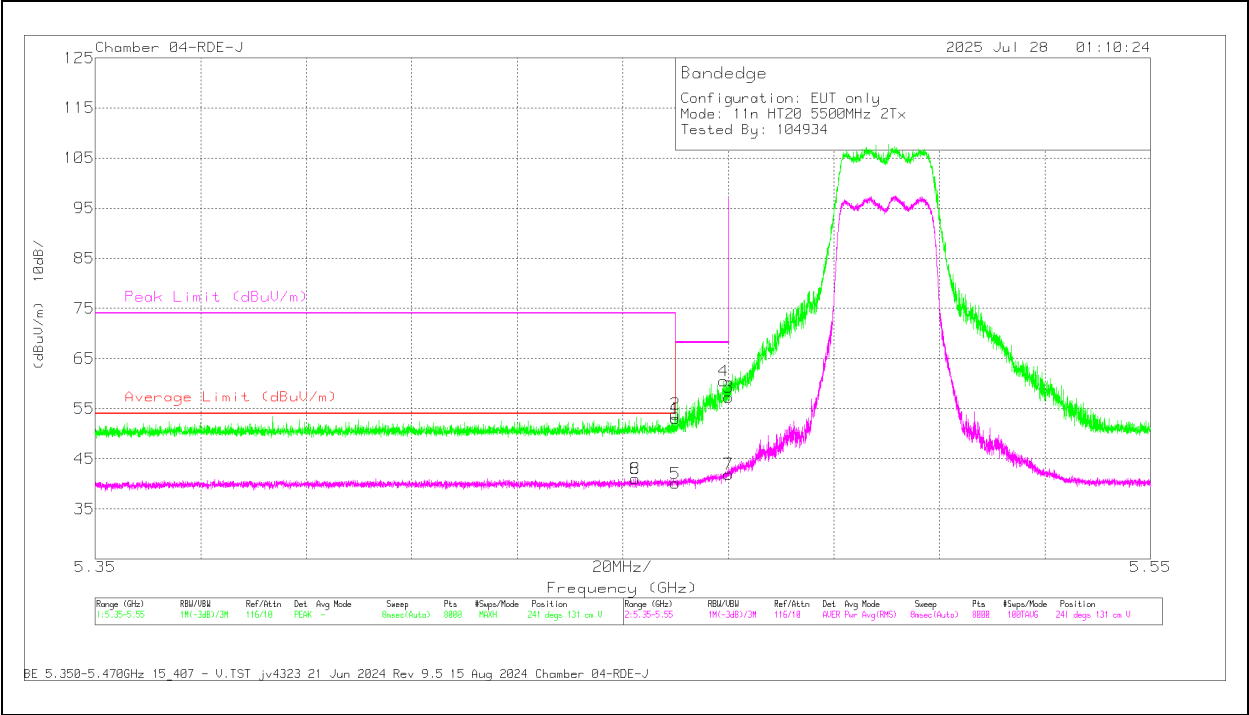

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	53.24	Pk	34.6	-34.8	0	53.04	-	-	68.2	-15.16	241	131	V
2	* 5.459988	54.15	Pk	34.6	-34.8	0	53.95	-	-	74	-20.05	241	131	V
5	* 5.46	40.28	RMS	34.6	-34.8	0	40.08	54	-13.92	-	-	241	131	V
6	* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V
8	* 5.452362	41.21	RMS	34.6	-34.8	0	41.01	54	-12.99	-	-	241	131	V
4	5.469139	60.69	Pk	34.6	-34.8	0	60.49	-	-	68.2	-7.71	241	131	V
3	5.47	57.51	Pk	34.6	-34.8	0	57.31	-	-	68.2	-10.89	241	131	V
7	5.47	42.07	RMS	34.6	-34.8	0	41.87	-	-	-	-	241	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)
HORIZONTAL RESULT

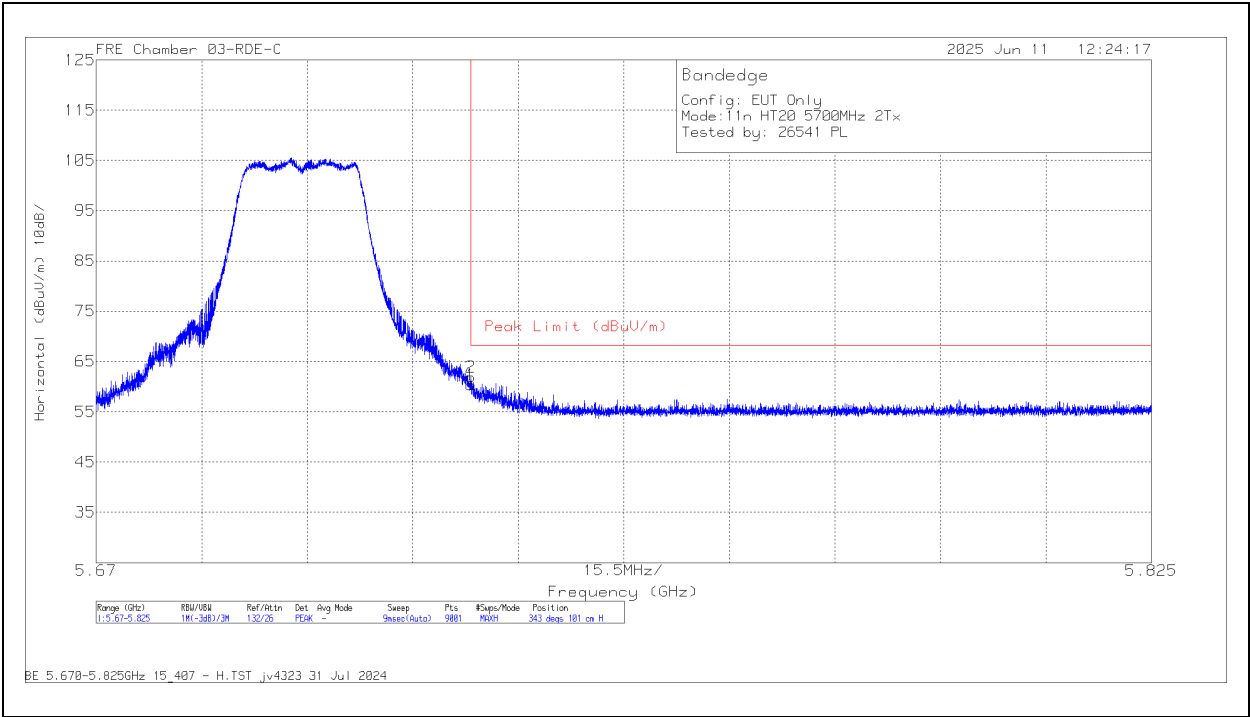


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.73	Pk	34.9	0	-36.29	60.34	68.2	-7.86	343	101	H
2	5.725024	63.32	Pk	34.9	0	-36.29	61.93	68.2	-6.27	343	101	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)
VERTICAL RESULT

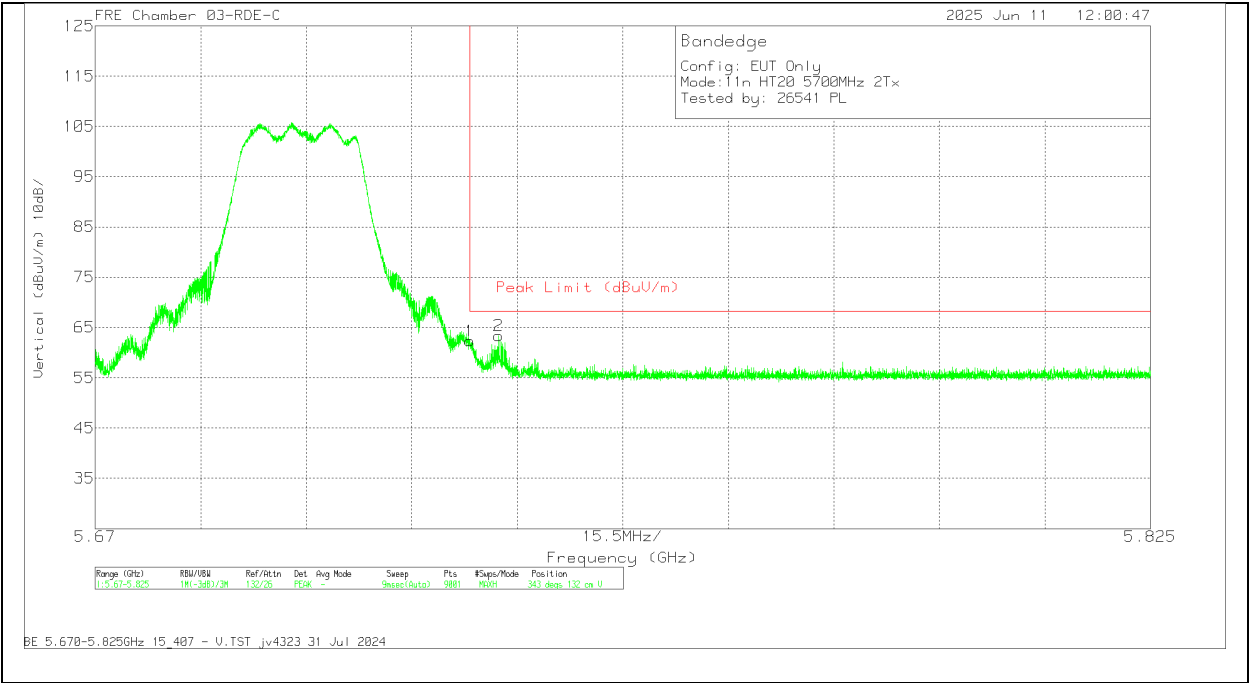

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	63.71	Pk	34.9	0	-36.29	62.32	68.2	-5.88	343	132	V
2	5.729261	64.82	Pk	34.9	0	-36.3	63.42	68.2	-4.78	343	132	V

Pk - Peak detector

1.1.19. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2c (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
EHT20 (SU Mode)	5500	6	* 5.46	55.9	Pk	34.6	-34.8	0	55.7	-	-	68.2	-12.5	85	101	H			
			* 5.458638	58.23	Pk	34.6	-34.8	0	58.03	-	-	74	-15.97	85	101	H			
			* 5.46	38.93	RMS	34.6	-34.8	0	38.73	54	-15.27	-	-	85	101	H			
			* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H			
			* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H			
			5.469964	63.16	Pk	34.6	-34.8	0	62.96	-	-	68.2	-5.24	85	101	H			
			5.47	61.32	Pk	34.6	-34.8	0	61.12	-	-	68.2	-7.08	85	101	H			
			5.47	44.44	RMS	34.6	-34.8	0	44.24	-	-	-	-	85	101	H			
			* 5.46	55.8	Pk	34.6	-34.8	0	55.6	-	-	68.2	-12.6	62	101	V			
			* 5.459313	56.78	Pk	34.6	-34.8	0	56.58	-	-	74	-17.42	62	101	V			
			* 5.46	39.68	RMS	34.6	-34.8	0	39.48	54	-14.52	-	-	62	101	V			
			* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V			
			* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V			
			5.469989	63.47	Pk	34.6	-34.8	0	63.27	-	-	68.2	-4.93	62	101	V			
			5.47	63.72	Pk	34.6	-34.8	0	63.52	-	-	68.2	-4.68	62	101	V			
			5.47	44.68	RMS	34.6	-34.8	0	44.48	-	-	-	-	62	101	V			
			5.725	62.33	Pk	34.8	-34.1	0	63.03	-	-	68.2	-5.17	189	103	H			
			5.725147	62.9	Pk	34.8	-34.1	0	63.6	-	-	68.2	-4.6	189	103	H			
			5.725	60.66	Pk	34.8	-34.1	0	61.36	-	-	68.2	-6.84	165	118	V			
			5.726426	60.78	Pk	34.8	-34.1	0	61.48	-	-	68.2	-6.72	165	118	V			
			5500	5	* 5.46	53.79	Pk	34.6	-34.8	0	53.59	-	-	68.2	-14.61	124	177	H	
					* 5.459788	56.72	Pk	34.6	-34.8	0	56.52	-	-	74	-17.48	124	177	H	
					* 5.46	38.95	RMS	34.6	-34.8	0	38.75	54	-15.25	-	-	124	177	H	
					* 5.459688	39.28	RMS	34.6	-34.8	0	39.08	54	-14.92	-	-	124	177	H	
	* 5.459688	39.28			RMS	34.6	-34.8	0	39.08	54	-14.92	-	-	124	177	H			
	5.468339	60.28			Pk	34.6	-34.8	0	60.08	-	-	68.2	-8.12	124	177	H			
	5.47	58.19			Pk	34.6	-34.8	0	57.99	-	-	68.2	-10.21	124	177	H			
	5.47	43.81			RMS	34.6	-34.8	0	43.61	-	-	-	-	124	177	H			
	* 5.46	53.11			Pk	34.6	-34.8	0	52.91	-	-	68.2	-15.29	87	107	V			
	* 5.458188	55.16			Pk	34.6	-34.8	0	54.96	-	-	74	-19.04	87	107	V			
	* 5.46	37.71			RMS	34.6	-34.8	0	37.51	54	-16.49	-	-	87	107	V			
	* 5.459138	38.51			RMS	34.6	-34.8	0	38.31	54	-15.69	-	-	87	107	V			
	* 5.459138	38.51			RMS	34.6	-34.8	0	38.31	54	-15.69	-	-	87	107	V			
	5.469714	58.91			Pk	34.6	-34.8	0	58.71	-	-	68.2	-9.49	87	107	V			
	5.47	55.92			Pk	34.6	-34.8	0	55.72	-	-	68.2	-12.48	87	107	V			
	5.47	42.31			RMS	34.6	-34.8	0	42.11	-	-	-	-	87	107	V			
	5.725	58.55			Pk	34.8	-34.1	0	59.25	-	-	68.2	-8.95	273	137	H			
	5.725244	62.58			Pk	34.8	-34.1	0	63.28	-	-	68.2	-4.92	273	137	H			
	5.725	61.88			Pk	34.8	-34.1	0	62.58	-	-	68.2	-5.62	184	113	V			
	5.72505	62.75			Pk	34.8	-34.1	0	63.45	-	-	68.2	-4.75	184	113	V			
	EHT40 (SU Mode)	5510			6	* 5.46	40.49	Pk	34.4	-16.6	0	58.29	-	-	68.2	-9.91	129	133	H
						* 5.459388	43.45	Pk	34.3	-16.6	0	61.15	-	-	74	-12.85	129	133	H
						* 5.46	28.19	RMS	34.4	-16.6	0	45.99	54	-8.01	-	-	129	133	H
						* 5.368427	29.37	RMS	34.3	-16.7	0	46.97	54	-7.03	-	-	129	133	H
			* 5.368427	29.37		RMS	34.3	-16.7	0	46.97	54	-7.03	-	-	129	133	H		
			5.469914	44.48		Pk	34.3	-16.5	0	62.28	-	-	68.2	-5.92	129	133	H		
			5.47	43.3		Pk	34.3	-16.5	0	61.1	-	-	68.2	-7.1	129	133	H		
			5.47	28.21		RMS	34.3	-16.5	0	46.01	-	-	-	-	129	133	H		
* 5.46			41.88	Pk		34.4	-16.6	0	59.68	-	-	68.2	-8.52	115	152	V			
* 5.458788			43.39	Pk		34.3	-16.6	0	61.09	-	-	74	-12.91	115	152	V			
* 5.46			27.81	RMS		34.4	-16.6	0	45.61	54	-8.39	-	-	115	152	V			
* 5.382854			29.47	RMS		34.3	-16.7	0	47.07	54	-6.93	-	-	115	152	V			
* 5.382854			29.47	RMS		34.3	-16.7	0	47.07	54	-6.93	-	-	115	152	V			
5.465939			45.07	Pk		34.4	-16.5	0	62.97	-	-	68.2	-5.23	115	152	V			
5.47			43.67	Pk		34.3	-16.5	0	61.47	-	-	68.2	-6.73	115	152	V			
5.47			28.18	RMS		34.3	-16.5	0	45.98	-	-	-	-	115	152	V			
5.725			42.34	Pk		34.5	-17.4	0	59.44	-	-	68.2	-8.76	330	221	H			
5.726048			45.02	Pk		34.5	-17.5	0	62.02	-	-	68.2	-6.18	330	221	H			
5.725			43.45	Pk		34.5	-17.4	0	60.55	-	-	68.2	-7.65	278	186	V			
5.726335			45.88	Pk		34.5	-17.4	0	62.98	-	-	68.2	-5.22	278	186	V			
5510			5	* 5.46		40.32	Pk	34.4	-16.6	0	58.12	-	-	68.2	-10.08	231	148	H	
				* 5.457488		42.28	Pk	34.3	-16.5	0	60.08	-	-	74	-13.92	231	148	H	
				* 5.46		27.72	RMS	34.4	-16.6	0	45.52	54	-8.48	-	-	231	148	H	
				* 5.39178		28.98	RMS	34.4	-16.7	0	46.68	54	-7.32	-	-	231	148	H	
		* 5.39178		28.98	RMS	34.4	-16.7	0	46.68	54	-7.32	-	-	231	148	H			
		5.467964		45.04	Pk	34.3	-16.5	0	62.84	-	-	68.2	-5.36	231	148	H			
		5.47		42.48	Pk	34.3	-16.5	0	60.28	-	-	68.2	-7.92	231	148	H			
		5.47		28.29	RMS	34.3	-16.5	0	46.09	-	-	-	-	231	148	H			
		* 5.46		40.07	Pk	34.4	-16.6	0	57.87	-	-	68.2	-10.33	201	106	V			
		* 5.454638		41.32	Pk	34.3	-16.5	0	59.12	-	-	74	-14.88	201	106	V			
		* 5.46		27.68	RMS	34.4	-16.6	0	45.48	54	-8.52	-	-	201	106	V			
		* 5.356051		29.29	RMS	34.3	-16.8	0	46.79	54	-7.21	-	-	201	106	V			
		* 5.356051		29.29	RMS	34.3	-16.8	0	46.79	54	-7.21	-	-	201	106	V			
		5.467289		44.36	Pk	34.3	-16.6	0	62.06	-	-	68.2	-6.14	201	106	V			
		5.47		40.99	Pk	34.3	-16.5	0	58.79	-	-	68.2	-9.41	201	106	V			
		5.47		28.46	RMS	34.3	-16.5	0	46.26	-	-	-	-	201	106	V			
		5.725		43.26	Pk	34.5	-17.4	0	60.36	-	-	68.2	-7.84	226	178	H			
		5.725251		45.91	Pk	34.5	-17.4	0	63.01	-	-	68.2	-5.19	226	178	H			
		5.725		43.85	Pk	34.5	-17.4	0	60.95	-	-	68.2	-7.25	156	100	V			
		5.725219		46.02	Pk	34.5	-17.4	0	63.12	-	-	68.2	-5.08	156	100	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT80 (SU Mode)	5530	6	* 5.46	40.5	Pk	34.4	-16.6	0	58.3	-	-	68.2	-9.9	119	124	H	
			* 5.453812	44.03	Pk	34.3	-16.5	0	61.83	-	-	74	-12.17	119	124	H	
			* 5.46	28.35	RMS	34.4	-16.6	0	46.15	54	-7.85	-	-	119	124	H	
			* 5.442961	29.22	RMS	34.4	-16.6	0	47.02	54	-6.98	-	-	119	124	H	
			* 5.442961	29.22	RMS	34.4	-16.6	0	47.02	54	-6.98	-	-	119	124	H	
			5.468514	44.92	Pk	34.3	-16.5	0	62.72	-	-	68.2	-5.48	119	124	H	
			5.47	40.85	Pk	34.3	-16.5	0	58.65	-	-	68.2	-9.55	119	124	H	
			5.47	28.25	RMS	34.3	-16.5	0	46.05	-	-	-	-	119	124	H	
			* 5.46	39.27	Pk	34.4	-16.6	0	57.07	-	-	68.2	-11.13	106	129	V	
			* 5.444386	42.5	Pk	34.4	-16.6	0	60.3	-	-	74	-13.7	106	129	V	
			* 5.46	28.03	RMS	34.4	-16.6	0	45.83	54	-8.17	-	-	106	129	V	
			* 5.395931	29.14	RMS	34.3	-16.7	0	46.74	54	-7.26	-	-	106	129	V	
			* 5.395931	29.14	RMS	34.3	-16.7	0	46.74	54	-7.26	-	-	106	129	V	
			5.469414	44.07	Pk	34.3	-16.5	0	61.87	-	-	68.2	-6.33	106	129	V	
			5.47	39.98	Pk	34.3	-16.5	0	57.78	-	-	68.2	-10.42	106	129	V	
			5.47	28.17	RMS	34.3	-16.5	0	45.97	-	-	-	-	106	129	V	
	5610		5.725	40.65	Pk	34.5	-17.4	0	57.75	-	-	68.2	-10.45	139	154	H	
			5.733316	42.18	Pk	34.6	-17.3	0	59.48	-	-	68.2	-8.72	139	154	H	
			5.725	41.44	Pk	34.5	-17.4	0	58.54	-	-	68.2	-9.66	106	122	V	
		5.733157	42.66	Pk	34.6	-17.3	0	59.96	-	-	68.2	-8.24	106	122	V		
		* 5.460	47.16	Pk	34.5	-23.95	0	57.71	-	-	68.2	-10.49	80	243	H		
	5530	5	* 5.427333	48.94	Pk	34.5	-24	0	59.44	-	-	74	-14.56	80	243	H	
			* 5.460	34.34	RMS	34.5	-23.95	0	44.89	54	-9.11	-	-	80	243	H	
			* 5.457021	35.13	RMS	34.5	-23.94	0	45.69	54	-8.31	-	-	80	243	H	
			* 5.457021	35.13	RMS	34.5	-23.94	0	45.69	54	-8.31	-	-	80	243	H	
			5.467554	53.02	Pk	34.5	-23.9	0	63.62	-	-	68.2	-4.58	80	243	H	
			5.47	46.65	Pk	34.5	-23.84	0	57.31	-	-	68.2	-10.89	80	243	H	
			5.47	35.4	RMS	34.5	-23.84	0	46.06	-	-	-	-	80	243	H	
			* 5.460	44.4	Pk	34.5	-23.95	0	54.95	-	-	68.2	-13.25	116	121	V	
			* 5.459466	49.42	Pk	34.5	-23.93	0	59.99	-	-	74	-14.01	116	121	V	
			* 5.460	33.93	RMS	34.5	-23.95	0	44.48	54	-9.52	-	-	116	121	V	
			* 5.452377	34.73	RMS	34.5	-24.03	0	45.2	54	-8.8	-	-	116	121	V	
			* 5.452377	34.73	RMS	34.5	-24.03	0	45.2	54	-8.8	-	-	116	121	V	
			5.467066	51.07	Pk	34.5	-23.91	0	61.66	-	-	68.2	-6.54	116	121	V	
			5.47	46.05	Pk	34.5	-23.84	0	56.71	-	-	68.2	-11.49	116	121	V	
			5.47	33.86	RMS	34.5	-23.84	0	44.52	-	-	-	-	116	121	V	
			5610	5.725	62.64	Pk	35.1	-38.19	0	59.55	-	-	68.2	-8.65	317	131	H
				5.727446	65.72	Pk	35.1	-38.28	0	62.54	-	-	68.2	-5.66	317	131	H
				5.725	62.66	Pk	35.1	-38.19	0	59.57	-	-	68.2	-8.63	277	102	V
				5.725265	64.45	Pk	35.1	-38.2	0	61.35	-	-	68.2	-6.85	277	102	V
* 5.46	60.09	Pk		34.6	-34.8	0	59.89	-	-	68.2	-8.31	275	148	H			
EHT160 (SU Mode)	5570 (Low BE)	6	* 5.447512	63.58	Pk	34.6	-34.8	0	63.38	-	-	74	-10.62	275	148	H	
			* 5.46	45.31	RMS	34.6	-34.8	0.14	45.25	54	-8.75	-	-	275	148	H	
			* 5.450962	47.32	RMS	34.6	-34.8	0.14	47.26	54	-6.74	-	-	275	148	H	
			* 5.450962	47.32	RMS	34.6	-34.8	0.14	47.26	54	-6.74	-	-	275	148	H	
			5.467314	63.75	Pk	34.6	-34.8	0	63.55	-	-	68.2	-4.65	275	148	H	
			5.47	60.06	Pk	34.6	-34.8	0	59.86	-	-	68.2	-8.34	275	148	H	
			5.47	45.51	RMS	34.6	-34.8	0.14	45.45	-	-	-	-	275	148	H	
			* 5.46	59.6	Pk	34.6	-34.8	0	59.4	-	-	68.2	-8.8	182	104	V	
			* 5.447837	62.13	Pk	34.6	-34.8	0	61.93	-	-	74	-12.07	182	104	V	
			* 5.46	44.84	RMS	34.6	-34.8	0.14	44.78	54	-9.22	-	-	182	104	V	
			* 5.447787	46.32	RMS	34.6	-34.8	0.14	46.26	54	-7.74	-	-	182	104	V	
			* 5.447787	46.32	RMS	34.6	-34.8	0.14	46.26	54	-7.74	-	-	182	104	V	
			5.465314	61.84	Pk	34.6	-34.8	0	61.64	-	-	68.2	-6.56	182	104	V	
			5.47	59.76	Pk	34.6	-34.8	0	59.56	-	-	68.2	-8.64	182	104	V	
			5.47	44.48	RMS	34.6	-34.8	0.14	44.42	-	-	-	-	182	104	V	
			5570 (High BE)	5.725	41.32	Pk	34.5	-17.4	0	58.42	-	-	68.2	-9.78	137	102	H
	5.725474	45.85		Pk	34.5	-17.4	0	62.95	-	-	68.2	-5.25	137	102	H		
	5.725	43.87		Pk	34.5	-17.4	0	60.97	-	-	68.2	-7.23	96	135	V		
	5.726111	46.47		Pk	34.5	-17.5	0	63.47	-	-	68.2	-4.73	96	135	V		
	5570 (Low BE)	5	* 5.46	59.49	Pk	34.6	-34.8	0	59.29	-	-	68.2	-8.91	190	165	H	
			* 5.447637	62.83	Pk	34.6	-34.8	0	62.63	-	-	74	-11.37	190	165	H	
			* 5.46	45.08	RMS	34.6	-34.8	0.14	45.02	54	-8.98	-	-	190	165	H	
			* 5.448112	46.76	RMS	34.6	-34.9	0.14	46.6	54	-7.4	-	-	190	165	H	
			* 5.448112	46.76	RMS	34.6	-34.9	0.14	46.6	54	-7.4	-	-	190	165	H	
5.467789			63.5	Pk	34.6	-34.8	0	63.3	-	-	68.2	-4.9	190	165	H		
5.47			60.03	Pk	34.6	-34.8	0	59.83	-	-	68.2	-8.37	190	165	H		
5.47			45.31	RMS	34.6	-34.8	0.14	45.25	-	-	-	-	190	165	H		
* 5.46			58.68	Pk	34.6	-34.8	0	58.48	-	-	68.2	-9.72	153	105	V		
* 5.447712			61.96	Pk	34.6	-34.8	0	61.76	-	-	74	-12.24	153	105	V		
* 5.46			43.94	RMS	34.6	-34.8	0.14	43.88	54	-10.12	-	-	153	105	V		
* 5.448412			46.15	RMS	34.6	-34.9	0.14	45.99	54	-8.01	-	-	153	105	V		
* 5.448412			46.15	RMS	34.6	-34.9	0.14	45.99	54	-8.01	-	-	153	105	V		
5.469339			62.08	Pk	34.6	-34.8	0	61.88	-	-	68.2	-6.32	153	105	V		
5.47	59.37	Pk	34.6	-34.8	0	59.17	-	-	68.2	-9.03	153	105	V				
5.47	43.89	RMS	34.6	-34.8	0.14	43.83	-	-	-	-	153	105	V				
5570 (High BE)	5.725	54.62	Pk	34.8	-34.1	0	55.32	-	-	68.2	-12.88	182	163	H			
	5.725729	56.06	Pk	34.8	-34.1	0	56.76	-	-	68.2	-11.44	182	163	H			
	5.725	53.15	Pk	34.8	-34.1	0	53.85	-	-	68.2	-14.35	246	149	V			
	5.725187	54.17	Pk	34.8	-34.1	0	54.87	-	-	68.2	-13.33	246	149	V			


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

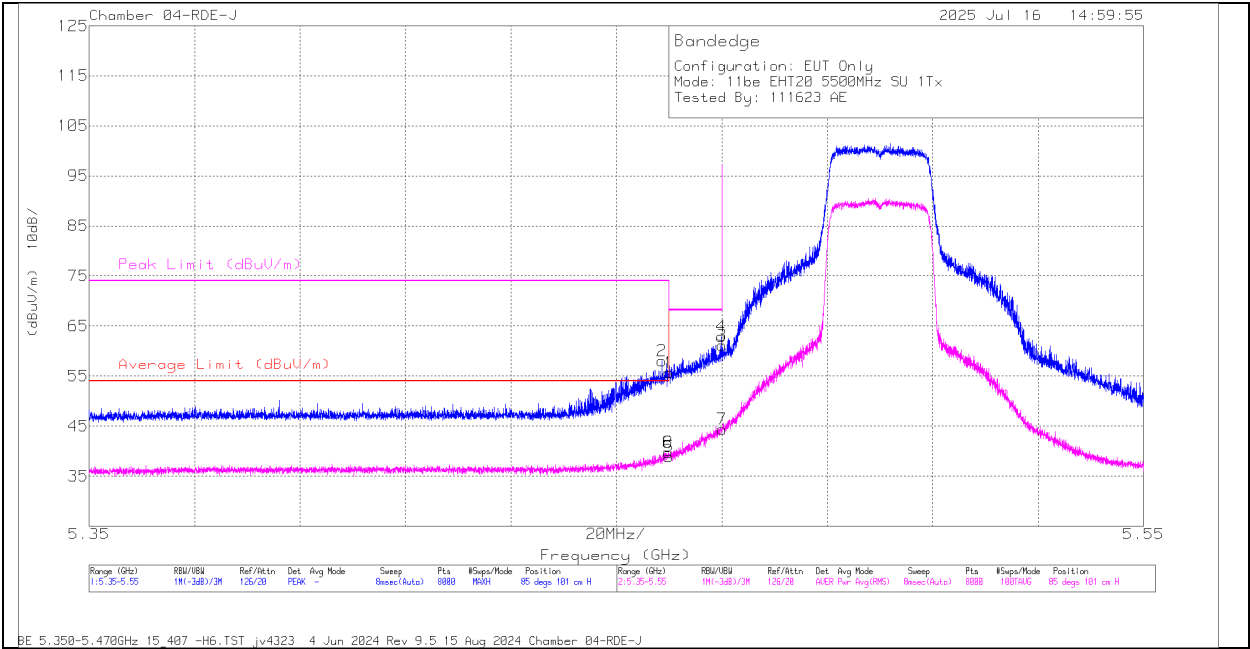


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.9	Pk	34.6	-34.8	0	55.7	-	-	68.2	-12.5	85	101	H
2	* 5.458638	58.23	Pk	34.6	-34.8	0	58.03	-	-	74	-15.97	85	101	H
5	* 5.46	38.93	RMS	34.6	-34.8	0	38.73	54	-15.27	-	-	85	101	H
6	* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
8	* 5.459863	39.88	RMS	34.6	-34.8	0	39.68	54	-14.32	-	-	85	101	H
4	5.469964	63.16	Pk	34.6	-34.8	0	62.96	-	-	68.2	-5.24	85	101	H
3	5.47	61.32	Pk	34.6	-34.8	0	61.12	-	-	68.2	-7.08	85	101	H
7	5.47	44.44	RMS	34.6	-34.8	0	44.24	-	-	-	-	85	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

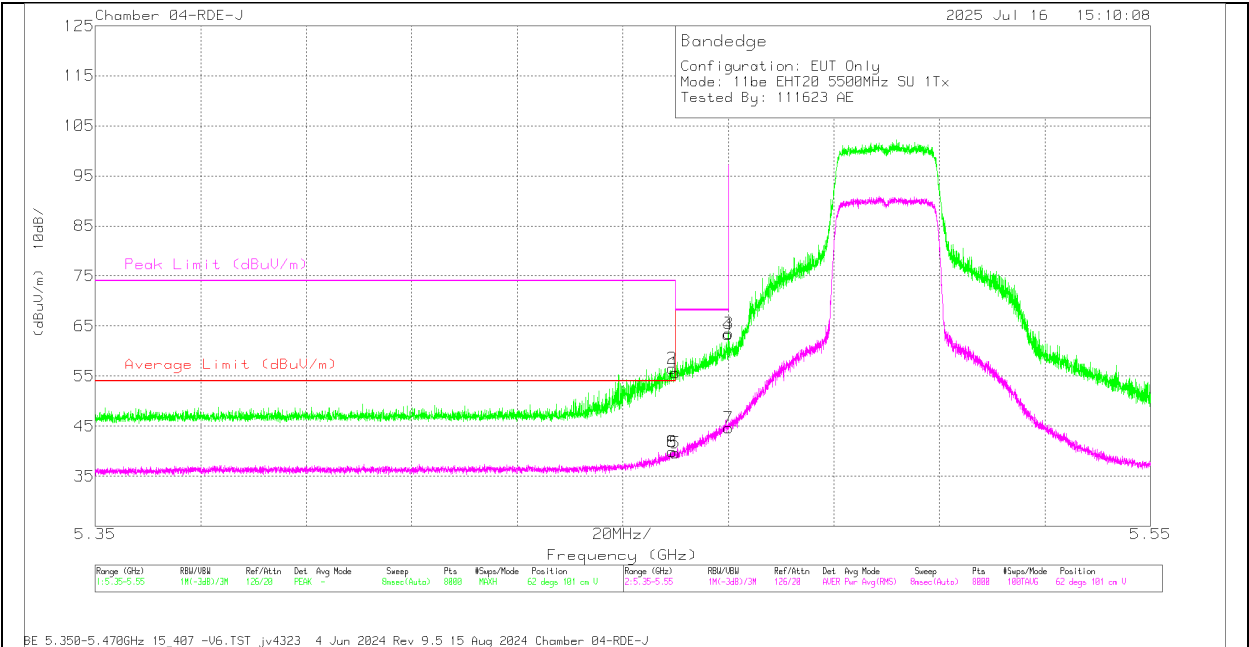


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.8	Pk	34.6	-34.8	0	55.6	-	-	68.2	-12.6	62	101	V
2	* 5.459313	56.78	Pk	34.6	-34.8	0	56.58	-	-	74	-17.42	62	101	V
5	* 5.46	39.68	RMS	34.6	-34.8	0	39.48	54	-14.52	-	-	62	101	V
6	* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
8	* 5.459313	39.96	RMS	34.6	-34.8	0	39.76	54	-14.24	-	-	62	101	V
4	5.469989	63.47	Pk	34.6	-34.8	0	63.27	-	-	68.2	-4.93	62	101	V
3	5.47	63.72	Pk	34.6	-34.8	0	63.52	-	-	68.2	-4.68	62	101	V
7	5.47	44.68	RMS	34.6	-34.8	0	44.48	-	-	-	-	62	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

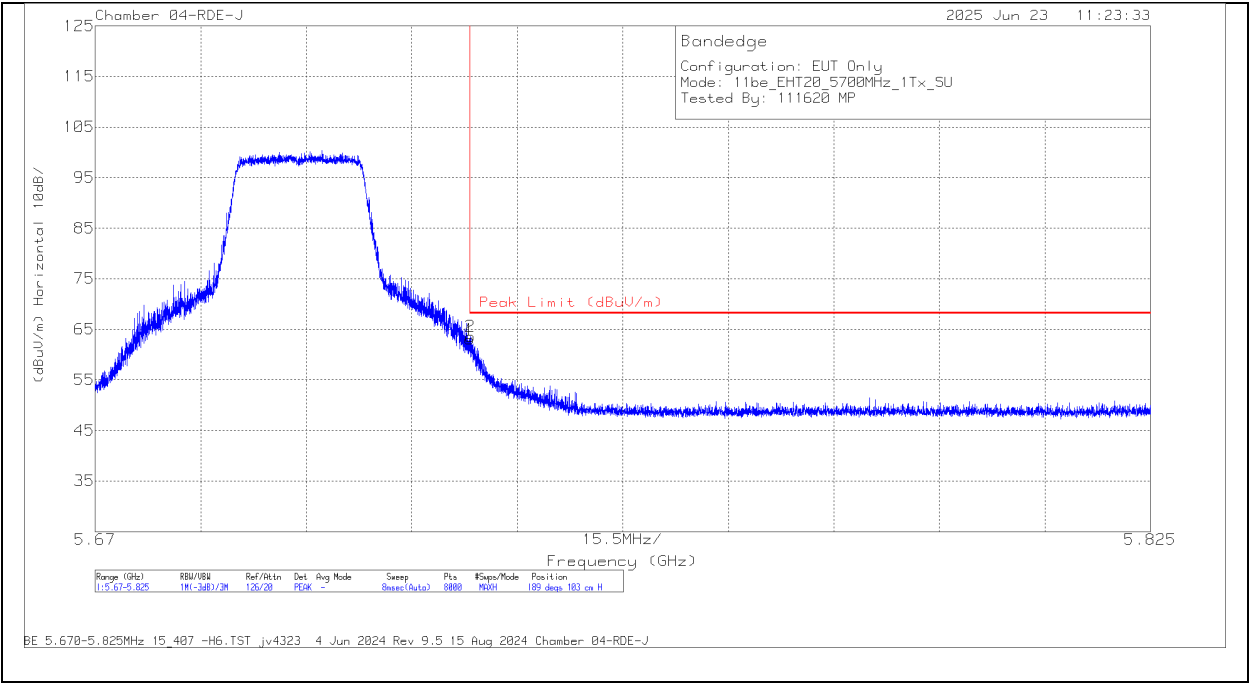


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.33	Pk	34.8	-34.1	0	63.03	68.2	-5.17	189	103	H
2	5.725147	62.9	Pk	34.8	-34.1	0	63.6	68.2	-4.6	189	103	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

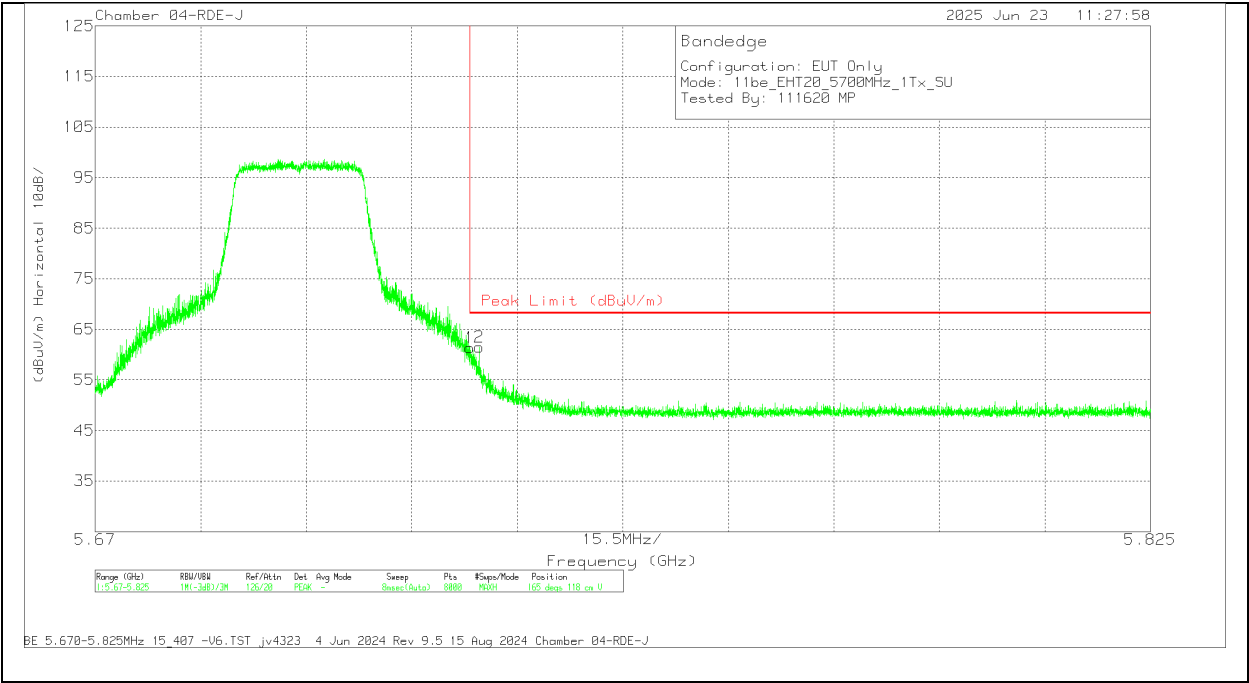

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.66	Pk	34.8	-34.1	0	61.36	68.2	-6.84	165	118	V
2	5.726426	60.78	Pk	34.8	-34.1	0	61.48	68.2	-6.72	165	118	V

Pk - Peak detector

1.1.20. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52T / Index 37)	5500	6	* 5.46	56.19	Pk	34.3	-35.5	0	54.99	-	-	68.2	-13.21	169	107	H
			* 5.375511	58.6	Pk	34.4	-35.5	0	57.5	-	-	74	-16.5	169	107	H
			5.47	58.28	Pk	34.3	-35.6	0	56.98	-	-	68.2	-11.22	169	107	H
			5.468021	61.54	Pk	34.3	-35.6	0	60.24	-	-	68.2	-7.96	169	107	H
			* 5.46	44.88	RMS	34.3	-35.5	0	43.68	54	-10.32	-	-	169	107	H
			* 5.449755	46.42	RMS	34.3	-35.42	0	45.3	54	-8.7	-	-	169	107	H
			5.47	45.35	RMS	34.3	-35.6	0	44.05	-	-	-	-	169	107	H
			* 5.449755	46.42	RMS	34.3	-35.42	0	45.3	54	-8.7	-	-	169	107	H
			* 5.46	55.86	Pk	34.3	-35.5	0	54.66	-	-	68.2	-13.54	167	117	V
			* 5.441732	58.16	Pk	34.3	-35.43	0	57.03	-	-	74	-16.97	167	117	V
			5.47	59.87	Pk	34.3	-35.6	0	58.57	-	-	68.2	-9.63	167	117	V
			5.46971	61.56	Pk	34.3	-35.6	0	60.26	-	-	68.2	-7.94	167	117	V
			* 5.46	45.68	RMS	34.3	-35.5	0	44.48	54	-9.52	-	-	167	117	V
			* 5.437977	46.62	RMS	34.3	-35.6	0	45.32	54	-8.68	-	-	167	117	V
			5.47	45.12	RMS	34.3	-35.6	0	43.82	-	-	-	-	167	117	V
			* 5.437977	46.62	RMS	34.3	-35.6	0	45.32	54	-8.68	-	-	167	117	V
EHT20 (52T / Index 40)	5700		5.725	61.16	Pk	34.7	-36.96	0	58.9	-	-	68.2	-9.3	67	212	H
			5.729399	63.09	Pk	34.7	-36.95	0	60.84	-	-	68.2	-7.36	67	212	H
			5.725	59.15	Pk	34.7	-36.96	0	56.89	-	-	68.2	-11.31	352	346	V
			5.729691	61.72	Pk	34.7	-36.94	0	59.48	-	-	68.2	-8.72	352	346	V
			5.362089	46.78	RMS	34.6	-36.49	0	44.89	54	-9.11	-	-	282	187	H
EHT20 (52T / Index 37)	5500	5	5.362089	46.78	RMS	34.6	-36.49	0	44.89	54	-9.11	-	-	282	187	H
			5.366622	59.47	Pk	34.5	-36.64	0	57.33	-	-	74	-16.67	282	187	H
			5.46	55.91	Pk	34.5	-36.55	0	53.86	-	-	68.2	-14.34	282	187	H
			5.46	45.21	RMS	34.5	-36.55	0	43.16	54	-10.84	-	-	282	187	H
			5.464221	58.07	Pk	34.5	-36.46	0	56.11	-	-	68.2	-12.09	282	187	H
			5.47	56.11	Pk	34.5	-36.46	0	54.15	-	-	68.2	-14.05	282	187	H
			5.47	45.03	RMS	34.5	-36.46	0	43.07	-	-	-	-	282	187	H
			5.3578	59.02	Pk	34.6	-36.58	0	57.04	-	-	74	-16.96	345	120	V
			5.375044	46.66	RMS	34.6	-36.56	0	44.7	54	-9.3	-	-	345	120	V
			5.375044	46.66	RMS	34.6	-36.56	0	44.7	54	-9.3	-	-	345	120	V
			5.46	55.71	Pk	34.5	-36.55	0	53.66	-	-	68.2	-14.54	345	120	V
			5.46	44.58	RMS	34.5	-36.55	0	42.53	54	-11.47	-	-	345	120	V
			5.461177	57.24	Pk	34.5	-36.52	0	55.22	-	-	68.2	-12.98	345	120	V
			5.47	55.68	Pk	34.5	-36.46	0	53.72	-	-	68.2	-14.48	345	120	V
			5.47	44.95	RMS	34.5	-36.46	0	42.99	-	-	-	-	345	120	V
EHT20 (52T / Index 40)	5700		5.725	56.11	Pk	34.8	-36.16	0	54.75	-	-	68.2	-13.45	224	244	H
			5.725765	58.42	Pk	34.8	-36.16	0	57.06	-	-	68.2	-11.14	224	244	H
			5.725	57.74	Pk	34.8	-36.16	0	56.38	-	-	68.2	-11.82	351	192	V
			5.730708	58.38	Pk	34.8	-36.25	0	56.93	-	-	68.2	-11.27	351	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (242T / Index 61)	5510	6	* 5.460	41.33	Pk	34.6	-23.31	0	52.62	-	-	68.2	-15.58	231	198	H
			* 5.45971	44.75	Pk	34.6	-23.34	0	56.01	-	-	74	-17.99	231	198	H
			* 5.460	30.12	RMS	34.6	-23.31	0	41.41	54	-12.59	-	-	231	198	H
			* 5.452266	30.8	RMS	34.6	-23.41	0	41.99	54	-12.01	-	-	231	198	H
			* 5.452266	30.8	RMS	34.6	-23.41	0	41.99	54	-12.01	-	-	231	198	H
			5.469799	51.63	Pk	34.6	-23.26	0	62.97	-	-	68.2	-5.23	231	198	H
			5.47	48.63	Pk	34.6	-23.27	0	59.96	-	-	68.2	-8.24	231	198	H
			5.47	31.91	RMS	34.6	-23.27	0	43.24	-	-	-	-	231	198	H
			* 5.460	39.8	Pk	34.6	-23.31	0	51.09	-	-	68.2	-17.11	157	333	V
			* 5.364133	42.1	Pk	34.6	-23.32	0	53.38	-	-	74	-20.62	157	333	V
			* 5.460	28.78	RMS	34.6	-23.31	0	40.07	54	-13.93	-	-	157	333	V
			* 5.442844	30.06	RMS	34.6	-23.33	0	41.33	54	-12.67	-	-	157	333	V
			* 5.442844	30.06	RMS	34.6	-23.33	0	41.33	54	-12.67	-	-	157	333	V
			5.469532	45.89	Pk	34.6	-23.24	0	57.25	-	-	68.2	-10.95	157	333	V
			5.47	42.82	Pk	34.6	-23.27	0	54.15	-	-	68.2	-14.05	157	333	V
			5.47	29.73	RMS	34.6	-23.27	0	41.06	-	-	-	-	157	333	V
EHT40 (242T / Index 62)	5670		5.725	41.84	Pk	34.7	-22.81	0	53.73	-	-	68.2	-14.47	270	102	H
			5.726161	43.66	Pk	34.7	-22.81	0	55.55	-	-	68.2	-12.65	270	102	H
			5.725	40.27	Pk	34.7	-22.81	0	52.16	-	-	68.2	-16.04	89	386	V
			5.807655	42.69	Pk	35	-22.55	0	55.14	-	-	68.2	-13.06	89	386	V
EHT40 (242T / Index 61)	5510	5	5.433844	47.74	RMS	34.4	-38.04	0	44.1	54	-9.9	-	-	38	166	H
			5.433844	47.74	RMS	34.4	-38.04	0	44.1	54	-9.9	-	-	38	166	H
			5.45091	59.52	Pk	34.4	-37.92	0	56	-	-	74	-18	38	166	H
			5.46	57.08	Pk	34.4	-37.94	0	53.54	-	-	68.2	-14.66	38	166	H
			5.46	46.09	RMS	34.4	-37.94	0	42.55	54	-11.45	-	-	38	166	H
			5.466732	61.06	Pk	34.4	-37.85	0	57.61	-	-	68.2	-10.59	38	166	H
			5.47	58.92	Pk	34.4	-37.77	0	55.55	-	-	68.2	-12.65	38	166	H
			5.47	46.73	RMS	34.4	-37.77	0	43.36	-	-	-	-	38	166	H
			5.422599	47.9	RMS	34.4	-38.04	0	44.26	54	-9.74	-	-	151	134	V
			5.422599	47.9	RMS	34.4	-38.04	0	44.26	54	-9.74	-	-	151	134	V
			5.444955	59.8	Pk	34.4	-37.96	0	56.24	-	-	74	-17.76	151	134	V
			5.46	57.81	Pk	34.4	-37.94	0	54.27	-	-	68.2	-13.93	151	134	V
			5.46	46.53	RMS	34.4	-37.94	0	42.99	54	-11.01	-	-	151	134	V
			5.469799	59.17	Pk	34.4	-37.78	0	55.79	-	-	68.2	-12.41	151	134	V
			5.47	57.72	Pk	34.4	-37.77	0	54.35	-	-	68.2	-13.85	151	134	V
			5.47	46.44	RMS	34.4	-37.77	0	43.07	-	-	-	-	151	134	V
EHT40 (242T / Index 62)	5670		5.725	57.43	Pk	34.9	-34.4	0	57.93	-	-	68.2	-10.27	110	107	H
			5.788918	58.22	Pk	35	-34.4	0	58.82	-	-	68.2	-9.38	110	107	H
			5.725	55.25	Pk	34.9	-34.4	0	55.75	-	-	68.2	-12.45	79	101	V
			5.738612	58.98	Pk	34.9	-34.4	0	59.48	-	-	68.2	-8.72	79	101	V
EHT40 ((106+26)T / Index 82)	5510	6	* 5.460	51.18	Pk	34.6	-30.4	0	55.38	-	-	68.2	-12.82	68	263	H
			* 5.455363	53.38	Pk	34.6	-30.4	0	57.58	-	-	74	-16.42	68	263	H
			* 5.460	39.98	RMS	34.6	-30.4	0	44.18	54	-9.82	-	-	68	263	H
			* 5.361851	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	68	263	H
			* 5.361851	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	68	263	H
			5.469814	58.86	Pk	34.6	-30.4	0	63.06	-	-	68.2	-5.14	68	263	H
			5.47	58.6	Pk	34.6	-30.4	0	62.8	-	-	68.2	-5.4	68	263	H
			5.47	40.51	RMS	34.6	-30.4	0	44.71	-	-	-	-	68	263	H
			* 5.460	50.67	Pk	34.6	-30.4	0	54.87	-	-	68.2	-13.33	36	114	V
			* 5.448387	52.92	Pk	34.6	-30.4	0	57.12	-	-	74	-16.88	36	114	V
			* 5.460	39.98	RMS	34.6	-30.4	0	44.18	54	-9.82	-	-	36	114	V
			* 5.449237	40.79	RMS	34.6	-30.4	0	44.99	54	-9.01	-	-	36	114	V
			* 5.449237	40.79	RMS	34.6	-30.4	0	44.99	54	-9.01	-	-	36	114	V
			5.469614	59.28	Pk	34.6	-30.4	0	63.48	-	-	68.2	-4.72	36	114	V
			5.47	57.56	Pk	34.6	-30.4	0	61.76	-	-	68.2	-6.44	36	114	V
			5.47	40.03	RMS	34.6	-30.4	0	44.23	-	-	-	-	36	114	V
EHT40 ((106+26)T / Index 85)	5670		5.725	50.48	Pk	34.6	-29.9	0	55.18	-	-	68.2	-13.02	84	253	H
			5.774481	52.85	Pk	34.8	-29.8	0	57.85	-	-	68.2	-10.35	84	253	H
			5.725	50.11	Pk	34.6	-29.9	0	54.81	-	-	68.2	-13.39	17	129	V
			5.783452	52.21	Pk	34.8	-29.8	0	57.21	-	-	68.2	-10.99	17	129	V
EHT40 ((106+26)T / Index 82)	5510	5	5.444866	47.66	RMS	34.4	-37.96	0	44.1	54	-9.9	-	-	38	165	H
			5.444866	47.66	RMS	34.4	-37.96	0	44.1	54	-9.9	-	-	38	165	H
			5.457488	59.86	Pk	34.4	-37.89	0	56.37	-	-	74	-17.63	38	165	H
			5.46	57.59	Pk	34.4	-37.94	0	54.05	-	-	68.2	-14.15	38	165	H
			5.46	46.46	RMS	34.4	-37.94	0	42.92	54	-11.08	-	-	38	165	H
			5.466932	61.34	Pk	34.4	-37.84	0	57.9	-	-	68.2	-10.3	38	165	H
			5.47	58.01	Pk	34.4	-37.77	0	54.64	-	-	68.2	-13.56	38	165	H
			5.47	47.06	RMS	34.4	-37.77	0	43.69	-	-	-	-	38	165	H
			5.398266	60.06	Pk	34.4	-38.09	0	56.37	-	-	74	-17.63	151	134	V
			5.445377	47.51	RMS	34.4	-37.96	0	43.95	54	-10.05	-	-	151	134	V
			5.445377	47.51	RMS	34.4	-37.96	0	43.95	54	-10.05	-	-	151	134	V
			5.46	57.44	Pk	34.4	-37.94	0	53.9	-	-	68.2	-14.3	151	134	V
			5.46	46.76	RMS	34.4	-37.94	0	43.22	54	-10.78	-	-	151	134	V
			5.460421	59.5	Pk	34.4	-37.94	0	55.96	-	-	68.2	-12.24	151	134	V
			5.47	58.03	Pk	34.4	-37.77	0	54.66	-	-	68.2	-13.54	151	134	V
			5.47	45.92	RMS	34.4	-37.77	0	42.55	-	-	-	-	151	134	V
EHT40 ((106+26)T / Index 85)	5670		5.725	55.9	Pk	34.9	-34.4	0	56.4	-	-	68.2	-11.8	108	107	H
			5.744675	58.59	Pk	34.9	-34.5	0	58.99	-	-	68.2	-9.21	108	107	H
			5.725	56.61	Pk	34.9	-34.4	0	57.11	-	-	68.2	-11.09	79	101	V
			5.809171	58.67	Pk	35.1	-34.3	0	59.47	-	-	68.2	-8.73	79	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 65)	5530	6	5.455243	47.98	RMS	34.6	-38.78	0	43.8	54	-10.2	-	-	248	121	H
			5.455243	47.98	RMS	34.6	-38.78	0	43.8	54	-10.2	-	-	248	121	H
			5.458399	63.21	Pk	34.6	-38.73	0	59.08	-	-	74	-14.92	248	121	H
			5.46	60.86	Pk	34.6	-38.71	0	56.75	-	-	68.2	-11.45	248	121	H
			5.46	47.11	RMS	34.6	-38.71	0	43	54	-11	-	-	248	121	H
			5.469599	67.26	Pk	34.6	-38.76	0	63.1	-	-	68.2	-5.1	248	121	H
			5.47	66.15	Pk	34.6	-38.76	0	61.99	-	-	68.2	-6.21	248	121	H
			5.47	46.85	RMS	34.6	-38.76	0	42.69	-	-	-	-	248	121	H
			5.458488	63.79	Pk	34.6	-38.73	0	59.66	-	-	74	-14.34	195	393	V
			5.459932	47.83	RMS	34.6	-38.71	0	43.72	54	-10.28	-	-	195	393	V
			5.459932	47.83	RMS	34.6	-38.71	0	43.72	54	-10.28	-	-	195	393	V
			5.46	58.57	Pk	34.6	-38.71	0	54.46	-	-	68.2	-13.74	195	393	V
			5.46	46.68	RMS	34.6	-38.71	0	42.57	54	-11.43	-	-	195	393	V
			5.469777	67.79	Pk	34.6	-38.76	0	63.63	-	-	68.2	-4.57	195	393	V
			5.47	65.13	Pk	34.6	-38.76	0	60.97	-	-	68.2	-7.23	195	393	V
			5.47	46.99	RMS	34.6	-38.76	0	42.83	-	-	-	-	195	393	V
EHT80 (484T / Index 66)	5610		5.725	57.33	Pk	35.1	-38.19	0	54.24	-	-	68.2	-13.96	235	103	H
			5.737108	59.43	Pk	35.1	-38.15	0	56.38	-	-	68.2	-11.82	235	103	H
			5.725	57.3	Pk	35.1	-38.19	0	54.21	-	-	68.2	-13.99	175	113	V
			5.810434	59.36	Pk	35.1	-37.94	0	56.52	-	-	68.2	-11.68	175	113	V
			5.457532	48.34	RMS	34.6	-38.77	0	44.17	54	-9.83	-	-	331	159	H
			5.457532	48.34	RMS	34.6	-38.77	0	44.17	54	-9.83	-	-	331	159	H
EHT80 (484T / Index 65)	5530	5	5.458843	63.78	Pk	34.6	-38.69	0	59.69	-	-	74	-14.31	331	159	H
			5.46	61.71	Pk	34.6	-38.71	0	57.6	-	-	68.2	-10.6	331	159	H
			5.46	47.01	RMS	34.6	-38.71	0	42.9	54	-11.1	-	-	331	159	H
			5.469777	67.39	Pk	34.6	-38.76	0	63.23	-	-	68.2	-4.97	331	159	H
			5.47	66.07	Pk	34.6	-38.76	0	61.91	-	-	68.2	-6.29	331	159	H
			5.47	47.74	RMS	34.6	-38.76	0	43.58	-	-	-	-	331	159	H
			5.458221	47.95	RMS	34.6	-38.75	0	43.8	54	-10.2	-	-	314	113	V
			5.458221	47.95	RMS	34.6	-38.75	0	43.8	54	-10.2	-	-	314	113	V
			5.458443	62.58	Pk	34.6	-38.73	0	58.45	-	-	74	-15.55	314	113	V
			5.46	59.44	Pk	34.6	-38.71	0	55.33	-	-	68.2	-12.87	314	113	V
			5.46	47.56	RMS	34.6	-38.71	0	43.45	54	-10.55	-	-	314	113	V
			5.466754	65.45	Pk	34.6	-38.77	0	61.28	-	-	68.2	-6.92	314	113	V
			5.47	64.28	Pk	34.6	-38.76	0	60.12	-	-	68.2	-8.08	314	113	V
			5.47	47.42	RMS	34.6	-38.76	0	43.26	-	-	-	-	314	113	V
EHT80 (484T / Index 66)	5610		5.725	57.64	Pk	35.1	-38.19	0	54.55	-	-	68.2	-13.65	319	130	H
			5.793491	59.26	Pk	35.1	-37.99	0	56.37	-	-	68.2	-11.83	319	130	H
			5.725	57.1	Pk	35.1	-38.19	0	54.01	-	-	68.2	-14.19	220	124	V
			5.757933	59.73	Pk	35.1	-38.02	0	56.81	-	-	68.2	-11.39	220	124	V
			* 5.46	56.52	Pk	34.3	-35.5	0	55.32	-	-	68.2	-12.88	345	243	H
			* 5.383355	58.48	Pk	34.4	-35.5	0	57.38	-	-	74	-16.62	345	243	H
EHT80 (52T / Index 37)	5530	6	5.47	58.48	Pk	34.3	-35.6	0	57.18	-	-	68.2	-11.02	345	243	H
			5.469843	64.02	Pk	34.3	-35.6	0	62.72	-	-	68.2	-5.48	345	243	H
			* 5.46	45.63	RMS	34.3	-35.5	0.16	44.59	54	-9.41	-	-	345	243	H
			* 5.390711	46.31	RMS	34.4	-35.4	0.16	45.47	54	-8.53	-	-	345	243	H
			5.47	45.36	RMS	34.3	-35.6	0.16	44.22	-	-	-	-	345	243	H
			* 5.390711	46.31	RMS	34.4	-35.4	0.16	45.47	54	-8.53	-	-	345	243	H
			* 5.46	55.49	Pk	34.3	-35.5	0	54.29	-	-	68.2	-13.91	331	118	V
			* 5.450577	58.17	Pk	34.3	-35.4	0	57.07	-	-	74	-16.93	331	118	V
			5.47	62.46	Pk	34.3	-35.6	0	61.16	-	-	68.2	-7.04	331	118	V
			5.469821	63.22	Pk	34.3	-35.6	0	61.92	-	-	68.2	-6.28	331	118	V
			* 5.46	45.33	RMS	34.3	-35.5	0.16	44.29	54	-9.71	-	-	331	118	V
			* 5.390511	46.24	RMS	34.4	-35.4	0.16	45.4	54	-8.6	-	-	331	118	V
			5.47	45.44	RMS	34.3	-35.6	0.16	44.3	-	-	-	-	331	118	V
			* 5.390511	46.24	RMS	34.4	-35.4	0.16	45.4	54	-8.6	-	-	331	118	V
EHT80 (52T / Index 52)	5610		5.725	55.77	Pk	34.5	-35	0	55.27	-	-	68.2	-12.93	1	242	H
			5.81712	57.6	Pk	34.7	-34.6	0	57.7	-	-	68.2	-10.5	1	242	H
			5.725	55.53	Pk	34.5	-35	0	55.03	-	-	68.2	-13.17	302	101	V
			5.743058	58.27	Pk	34.5	-34.8	0	57.97	-	-	68.2	-10.23	302	101	V
			* 5.460	55.49	Pk	34.6	-35.79	0	54.3	-	-	68.2	-13.9	258	162	H
			* 5.430688	58.24	Pk	34.6	-35.94	0	56.9	-	-	74	-17.1	258	162	H
EHT80 (52T / Index 37)	5530	5	* 5.460	44.89	RMS	34.6	-35.79	0.16	43.86	54	-10.14	-	-	258	162	H
			* 5.448932	46.01	RMS	34.6	-35.91	0.16	44.86	54	-9.14	-	-	258	162	H
			* 5.448932	46.01	RMS	34.6	-35.91	0.16	44.86	54	-9.14	-	-	258	162	H
			5.462866	57.87	Pk	34.6	-35.7	0	56.77	-	-	68.2	-11.43	258	162	H
			5.47	56.36	Pk	34.6	-35.86	0	55.1	-	-	68.2	-13.1	258	162	H
			5.47	44.9	RMS	34.6	-35.86	0.16	43.8	-	-	-	-	258	162	H
			* 5.460	55.54	Pk	34.6	-35.79	0	54.35	-	-	68.2	-13.85	124	280	V
			* 5.44511	58.19	Pk	34.6	-35.98	0	56.81	-	-	74	-17.19	124	280	V
			* 5.460	44.7	RMS	34.6	-35.79	0.16	43.67	54	-10.33	-	-	124	280	V
			* 5.434021	46.26	RMS	34.6	-35.94	0.16	45.08	54	-8.92	-	-	124	280	V
			* 5.434021	46.26	RMS	34.6	-35.94	0.16	45.08	54	-8.92	-	-	124	280	V
			5.467177	57.36	Pk	34.6	-35.75	0	56.21	-	-	68.2	-11.99	124	280	V
			5.47	55.71	Pk	34.6	-35.86	0	54.45	-	-	68.2	-13.75	124	280	V
			5.47	45.05	RMS	34.6	-35.86	0.16	43.95	-	-	-	-	124	280	V
EHT80 (52T / Index 52)	5610		5.725	56.35	Pk	35.1	-38.19	0	53.26	-	-	68.2	-14.94	318	333	H
			5.738553	59.12	Pk	35.1	-38.17	0	56.05	-	-	68.2	-12.15	318	333	H
			5.725	57.23	Pk	35.1	-38.19	0	54.14	-	-	68.2	-14.06	255	362	V
			5.794822	59.35	Pk	35.1	-38.03	0	56.42	-	-	68.2	-11.78	255	362	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/ Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (242T / Index 61)	5570 (Lower)	6	* 5.460	57.42	Pk	34.6	-35.79	0	56.23	-	-	68.2	-11.97	229	229	H
			* 5.437577	58.85	Pk	34.6	-35.94	0	57.51	-	-	74	-16.49	229	229	H
			* 5.460	45.67	RMS	34.6	-35.79	0.1	44.58	54	-9.42	-	-	229	229	H
			* 5.457443	46.23	RMS	34.6	-35.95	0.1	44.98	54	-9.02	-	-	229	229	H
			* 5.457443	46.23	RMS	34.6	-35.95	0.1	44.98	54	-9.02	-	-	229	229	H
			5.46951	63.92	Pk	34.6	-35.85	0	62.67	-	-	68.2	-5.53	229	229	H
			5.47	62.89	Pk	34.6	-35.86	0	61.63	-	-	68.2	-6.57	229	229	H
			5.47	45.98	RMS	34.6	-35.86	0.1	44.82	-	-	-	-	229	229	H
			* 5.460	55.52	Pk	34.6	-35.79	0	54.33	-	-	68.2	-13.87	195	148	V
			* 5.457666	58.46	Pk	34.6	-35.96	0	57.1	-	-	74	-16.9	195	148	V
			* 5.460	45.07	RMS	34.6	-35.79	0.1	43.98	54	-10.02	-	-	195	148	V
			* 5.419133	46.15	RMS	34.6	-35.93	0.1	44.92	54	-9.08	-	-	195	148	V
			* 5.419133	46.15	RMS	34.6	-35.93	0.1	44.92	54	-9.08	-	-	195	148	V
			5.469888	63.6	Pk	34.6	-35.86	0	62.34	-	-	68.2	-5.86	195	148	V
			5.47	60.9	Pk	34.6	-35.86	0	59.64	-	-	68.2	-8.56	195	148	V
			5.47	45.8	RMS	34.6	-35.86	0.1	44.64	-	-	-	-	195	148	V
EHT160 (242T / Index S64)	5570 (Upper)		5.725	56.21	Pk	34.6	-37	0	53.81	-	-	68.2	-14.39	274	347	H
			5.819189	59.43	Pk	34.9	-36.9	0	57.43	-	-	68.2	-10.77	274	347	H
			5.725	56.79	Pk	34.6	-37	0	54.39	-	-	68.2	-13.81	209	122	V
			5.759293	59.33	Pk	34.7	-37.03	0	57	-	-	68.2	-11.2	209	122	V
EHT160 (242T / Index 61)	5570 (Lower)	5	* 5.460	55.45	Pk	34.6	-35.79	0	54.26	-	-	68.2	-13.94	82	168	H
			* 5.384822	58.67	Pk	34.6	-36.14	0	57.13	-	-	74	-16.87	82	168	H
			* 5.460	44.98	RMS	34.6	-35.79	0.1	43.89	54	-10.11	-	-	82	168	H
			* 5.459577	46.07	RMS	34.6	-35.86	0.1	44.91	54	-9.09	-	-	82	168	H
			* 5.459577	46.07	RMS	34.6	-35.86	0.1	44.91	54	-9.09	-	-	82	168	H
			5.463688	58.4	Pk	34.6	-35.69	0	57.31	-	-	68.2	-10.89	82	168	H
			5.47	57.18	Pk	34.6	-35.86	0	55.92	-	-	68.2	-12.28	82	168	H
			5.47	45.12	RMS	34.6	-35.86	0.1	43.96	-	-	-	-	82	168	H
			* 5.460	55.95	Pk	34.6	-35.79	0	54.76	-	-	68.2	-13.44	206	155	V
			* 5.381733	58.28	Pk	34.6	-36.05	0	56.83	-	-	74	-17.17	206	155	V
			* 5.460	44.88	RMS	34.6	-35.79	0.1	43.79	54	-10.21	-	-	206	155	V
			* 5.449555	46.08	RMS	34.6	-35.91	0.1	44.87	54	-9.13	-	-	206	155	V
			* 5.449555	46.08	RMS	34.6	-35.91	0.1	44.87	54	-9.13	-	-	206	155	V
			5.468665	57.28	Pk	34.6	-35.83	0	56.05	-	-	68.2	-12.15	206	155	V
			5.47	56.26	Pk	34.6	-35.86	0	55	-	-	68.2	-13.2	206	155	V
			5.47	45.35	RMS	34.6	-35.86	0.1	44.19	-	-	-	-	206	155	V
EHT160 (242T / Index S64)	5570 (Upper)		5.725	55.88	Pk	34.9	-36.29	0	54.49	-	-	68.2	-13.71	84	185	H
			5.8246	58.18	Pk	35.1	-35.94	0	57.34	-	-	68.2	-10.86	84	185	H
			5.725	55.71	Pk	34.9	-36.29	0	54.32	-	-	68.2	-13.88	35	102	V
			5.764364	58.37	Pk	35	-36.14	0	57.23	-	-	68.2	-10.97	35	102	V
EHT160 (52T / Index 37)	5570 (Lower)	6	* 5.460	57.46	Pk	34.6	-35.79	0	56.27	-	-	68.2	-11.93	223	210	H
			* 5.42191	58.96	Pk	34.6	-35.83	0	57.73	-	-	74	-16.27	223	210	H
			* 5.460	45.94	RMS	34.6	-35.79	0.2	44.95	54	-9.05	-	-	223	210	H
			* 5.453888	46.68	RMS	34.6	-35.95	0.2	45.53	54	-8.47	-	-	223	210	H
			* 5.453888	46.68	RMS	34.6	-35.95	0.2	45.53	54	-8.47	-	-	223	210	H
			5.469888	63.97	Pk	34.6	-35.86	0	62.71	-	-	68.2	-5.49	223	210	H
			5.47	62.44	Pk	34.6	-35.86	0	61.18	-	-	68.2	-7.02	223	210	H
			5.47	45.7	RMS	34.6	-35.86	0.2	44.64	-	-	-	-	223	210	H
			* 5.460	57.22	Pk	34.6	-35.79	0	56.03	-	-	68.2	-12.17	192	108	V
			* 5.459821	58.66	Pk	34.6	-35.82	0	57.44	-	-	74	-16.56	192	108	V
			* 5.460	45.35	RMS	34.6	-35.79	0.2	44.36	54	-9.64	-	-	192	108	V
			* 5.451755	46.37	RMS	34.6	-35.95	0.2	45.22	54	-8.78	-	-	192	108	V
			* 5.451755	46.37	RMS	34.6	-35.95	0.2	45.22	54	-8.78	-	-	192	108	V
			5.469954	63.62	Pk	34.6	-35.86	0	62.36	-	-	68.2	-5.84	192	108	V
			5.47	62.15	Pk	34.6	-35.86	0	60.89	-	-	68.2	-7.31	192	108	V
			5.47	45.68	RMS	34.6	-35.86	0.2	44.62	-	-	-	-	192	108	V
EHT160 (52T / Index S52)	5570 (Upper)		5.725	57.49	Pk	34.6	-37	0	55.09	-	-	68.2	-13.11	265	187	H
			5.803776	59.03	Pk	34.8	-36.9	0	56.93	-	-	68.2	-11.27	265	187	H
			5.725	58.79	Pk	34.6	-37	0	56.39	-	-	68.2	-11.81	209	143	V
			5.726058	59.88	Pk	34.6	-37	0	57.48	-	-	68.2	-10.72	209	143	V
EHT160 (52T / Index 37)	5570 (Lower)	5	5.415666	60.77	Pk	34.6	-37.92	0	57.45	-	-	74	-16.55	88	259	H
			5.457421	48.27	RMS	34.6	-37.74	0.2	45.33	54	-8.67	-	-	88	259	H
			5.457421	48.27	RMS	34.6	-37.74	0.2	45.33	54	-8.67	-	-	88	259	H
			5.46	57.43	Pk	34.6	-37.72	0	54.31	-	-	68.2	-13.89	88	259	H
			5.46	46.82	RMS	34.6	-37.72	0.2	43.9	54	-10.1	-	-	88	259	H
			5.469132	64.32	Pk	34.6	-37.81	0	61.11	-	-	68.2	-7.09	88	259	H
			5.47	61.86	Pk	34.6	-37.81	0	58.65	-	-	68.2	-9.55	88	259	H
			5.47	47.94	RMS	34.6	-37.81	0.2	44.93	-	-	-	-	88	259	H
			5.398488	47.61	RMS	34.7	-37.72	0.2	44.79	54	-9.21	-	-	53	102	V
			5.398488	47.61	RMS	34.7	-37.72	0.2	44.79	54	-9.21	-	-	53	102	V
			5.407111	60.38	Pk	34.6	-37.76	0	57.22	-	-	74	-16.78	53	102	V
			5.46	57.6	Pk	34.6	-37.72	0	54.48	-	-	68.2	-13.72	53	102	V
			5.46	46.82	RMS	34.6	-37.72	0.2	43.9	54	-10.1	-	-	53	102	V
			5.469732	59.96	Pk	34.6	-37.81	0	56.75	-	-	68.2	-11.45	53	102	V
			5.47	58.98	Pk	34.6	-37.81	0	55.77	-	-	68.2	-12.43	53	102	V
			5.47	46.77	RMS	34.6	-37.81	0.2	43.76	-	-	-	-	53	102	V
EHT160 (52T / Index S52)	5570 (Upper)		5.725	56.44	Pk	34.9	-36.29	0	55.05	-	-	68.2	-13.15	88	163	H
			5.770088	58.43	Pk	35	-36.15	0	57.28	-	-	68.2	-10.92	88	163	H
			5.725	55.91	Pk	34.9	-36.29	0	54.52	-	-	68.2	-13.68	336	105	V
			5.74541	58.36	Pk	35	-36.23	0	57.13	-	-	68.2	-11.07	336	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

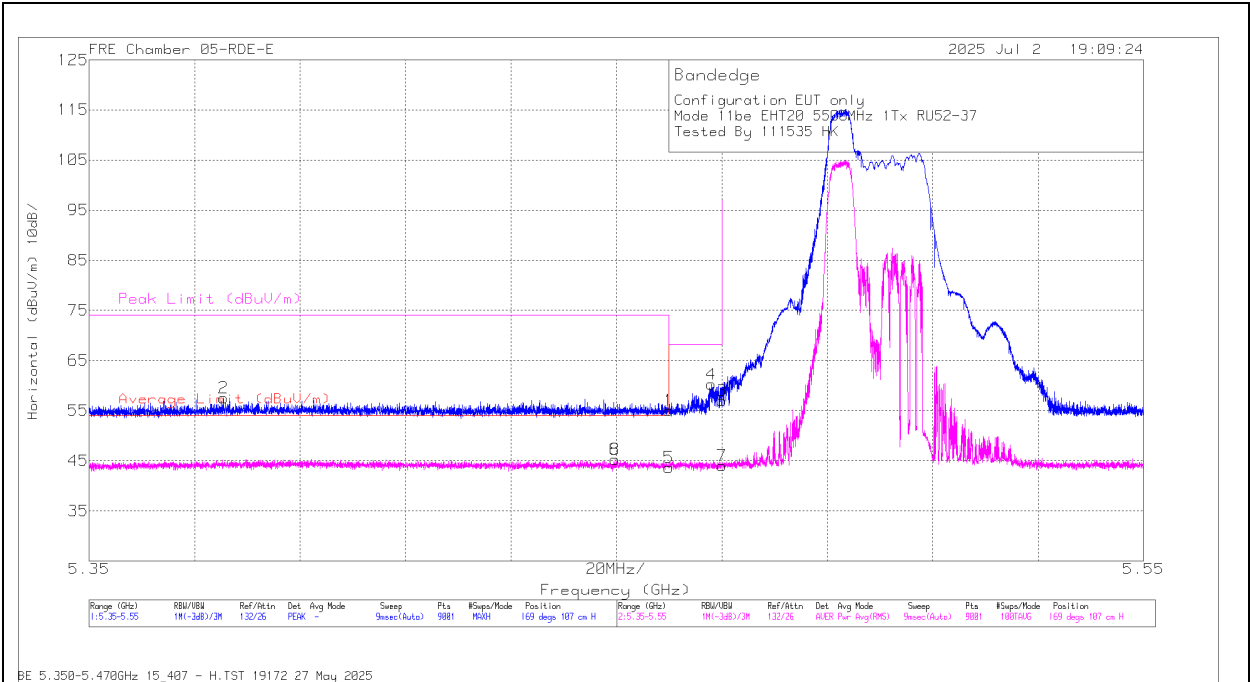


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	56.19	Pk	34.3	0	-35.5	54.99	-	-	68.2	-13.21	169	107	H
2	* 5.375511	58.6	Pk	34.4	0	-35.5	57.5	-	-	74	-16.5	169	107	H
3	5.47	58.28	Pk	34.3	0	-35.6	56.98	-	-	68.2	-11.22	169	107	H
4	5.468021	61.54	Pk	34.3	0	-35.6	60.24	-	-	68.2	-7.96	169	107	H
5	* 5.46	44.88	RMS	34.3	0	-35.5	43.68	54	-10.32	-	-	169	107	H
6	* 5.449755	46.42	RMS	34.3	0	-35.42	45.3	54	-8.7	-	-	169	107	H
7	5.47	45.35	RMS	34.3	0	-35.6	44.05	-	-	-	-	169	107	H
8	* 5.449755	46.42	RMS	34.3	0	-35.42	45.3	54	-8.7	-	-	169	107	H

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (LOW CHANNEL / 5500MHZ)

VERTICAL RESULT

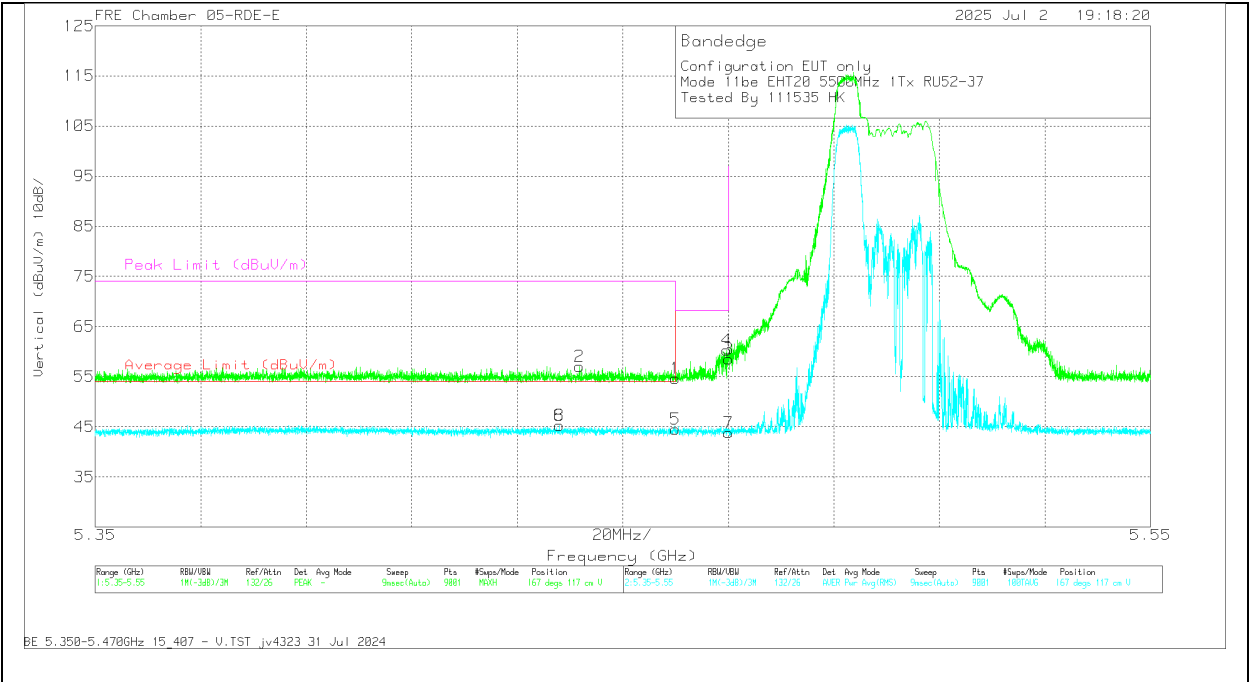


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80404 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.86	Pk	34.3	0	-35.5	54.66	-	-	68.2	-13.54	167	117	V
2	* 5.441732	58.16	Pk	34.3	0	-35.43	57.03	-	-	74	-16.97	167	117	V
3	5.47	59.87	Pk	34.3	0	-35.6	58.57	-	-	68.2	-9.63	167	117	V
4	5.46971	61.56	Pk	34.3	0	-35.6	60.26	-	-	68.2	-7.94	167	117	V
5	* 5.46	45.68	RMS	34.3	0	-35.5	44.48	54	-9.52	-	-	167	117	V
6	* 5.437977	46.62	RMS	34.3	0	-35.6	45.32	54	-8.68	-	-	167	117	V
7	5.47	45.12	RMS	34.3	0	-35.6	43.82	-	-	-	-	167	117	V
8	* 5.437977	46.62	RMS	34.3	0	-35.6	45.32	54	-8.68	-	-	167	117	V

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

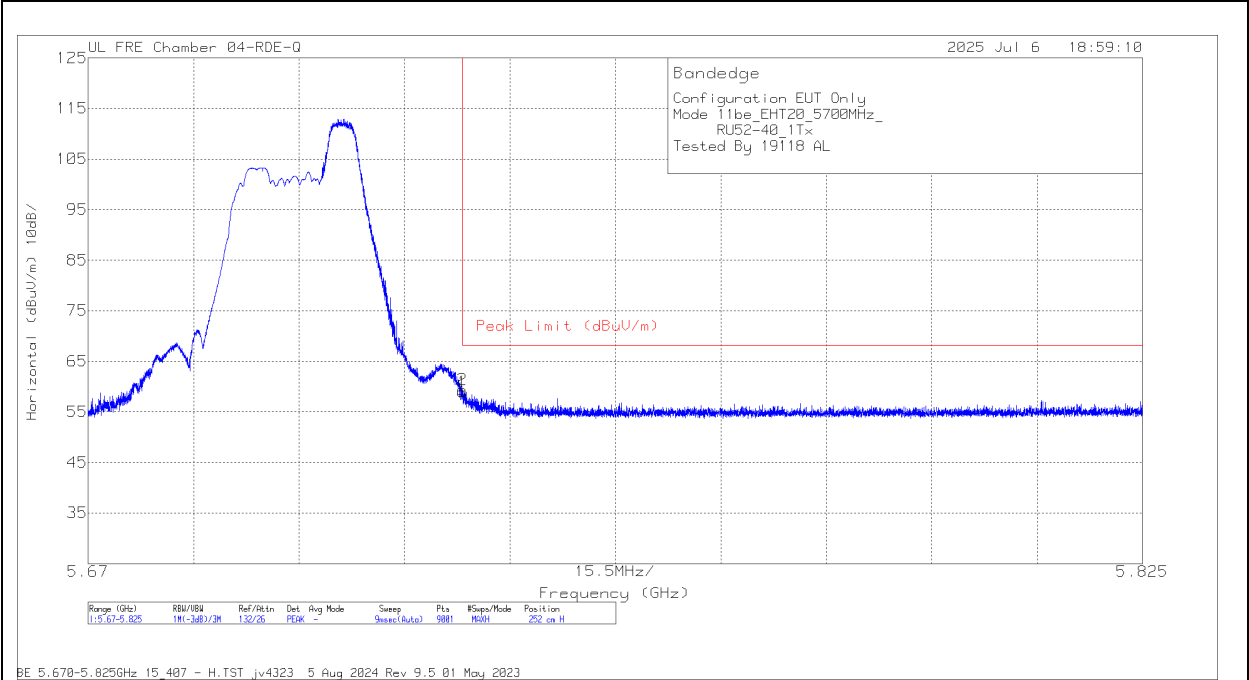


Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

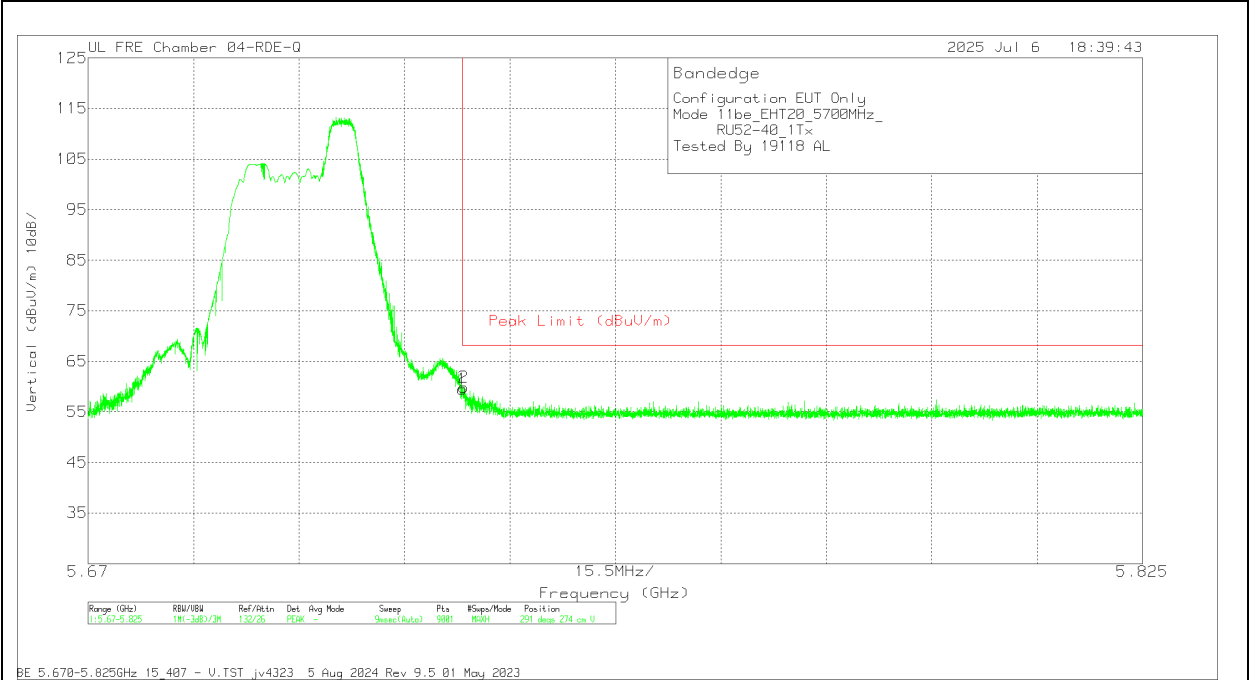

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.82	Pk	34.8	0	-36.16	59.46	68.2	-8.74	291	274	V
2	5.725197	61.22	Pk	34.8	0	-36.16	59.86	68.2	-8.34	291	274	V

Pk - Peak detector

1.1.21. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	5500	6 + 5	* 5.46	54.68	Pk	34.6	-34.8	0	54.48	-	-	68.2	-13.72	126	169	H	
			* 5.459088	58.73	Pk	34.6	-34.8	0	58.53	-	-	74	-15.47	126	169	H	
			* 5.46	38.27	RMS	34.6	-34.8	0	38.07	54	-15.93	-	-	126	169	H	
			* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H	
			* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H	
			5.468689	63.24	Pk	34.6	-34.8	0	63.04	-	-	68.2	-5.16	126	169	H	
			5.47	59.07	Pk	34.6	-34.8	0	58.87	-	-	68.2	-9.33	126	169	H	
			5.47	44.04	RMS	34.6	-34.8	0	43.84	-	-	-	-	126	169	H	
			* 5.46	55.07	Pk	34.6	-34.8	0	54.87	-	-	68.2	-13.33	49	139	V	
			* 5.459988	55.72	Pk	34.6	-34.8	0	55.52	-	-	74	-18.48	49	139	V	
			* 5.46	38.66	RMS	34.6	-34.8	0	38.46	54	-15.54	-	-	49	139	V	
			* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V	
			* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V	
			5.469939	62.85	Pk	34.6	-34.8	0	62.65	-	-	68.2	-5.55	49	139	V	
			5.47	59.09	Pk	34.6	-34.8	0	58.89	-	-	68.2	-9.31	49	139	V	
			5.47	45.1	RMS	34.6	-34.8	0	44.9	-	-	-	-	49	139	V	
	5700		5.725	60.43	Pk	34.8	-34.1	0	61.13	-	-	68.2	-7.07	133	159	H	
			5.725186	62.06	Pk	34.8	-34.1	0	62.76	-	-	68.2	-5.44	133	159	H	
			5.725	62.15	Pk	34.8	-34.1	0	62.85	-	-	68.2	-5.35	67	122	V	
			5.725418	62.05	Pk	34.8	-34.1	0	62.75	-	-	68.2	-5.45	67	122	V	
EHT40 (SU Mode)	5510	6 + 5	* 5.46	41.3	Pk	34.4	-16.6	0	59.1	-	-	68.2	-9.1	166	203	H	
			* 5.459913	43.45	Pk	34.4	-16.6	0	61.25	-	-	74	-12.75	166	203	H	
			* 5.46	28.14	RMS	34.4	-16.6	0	45.94	54	-8.06	-	-	166	203	H	
			* 5.410932	29.3	RMS	34.4	-16.6	0	47.1	54	-6.9	-	-	166	203	H	
			* 5.410932	29.3	RMS	34.4	-16.6	0	47.1	54	-6.9	-	-	166	203	H	
			5.469789	45.35	Pk	34.3	-16.5	0	63.15	-	-	68.2	-5.05	166	203	H	
			5.47	43.66	Pk	34.3	-16.5	0	61.46	-	-	68.2	-6.74	166	203	H	
			5.47	28.66	RMS	34.3	-16.5	0	46.46	-	-	-	-	166	203	H	
			* 5.46	38.72	Pk	34.4	-16.6	0	56.52	-	-	68.2	-11.68	110	268	V	
			* 5.458938	42.15	Pk	34.3	-16.6	0	59.85	-	-	74	-14.15	110	268	V	
			* 5.46	28.18	RMS	34.4	-16.6	0	45.98	54	-8.02	-	-	110	268	V	
			* 5.357851	29.61	RMS	34.3	-16.8	0	47.11	54	-6.89	-	-	110	268	V	
			* 5.357851	29.61	RMS	34.3	-16.8	0	47.11	54	-6.89	-	-	110	268	V	
			5.467839	42.77	Pk	34.3	-16.5	0	60.57	-	-	68.2	-7.63	110	268	V	
			5.47	40.2	Pk	34.3	-16.5	0	58	-	-	68.2	-10.2	110	268	V	
			5.47	28.16	RMS	34.3	-16.5	0	45.96	-	-	-	-	110	268	V	
	5670		5.725	43.99	Pk	34.5	-17.4	0	61.09	-	-	68.2	-7.11	168	260	H	
			5.729267	45.76	Pk	34.5	-17.3	0	62.96	-	-	68.2	-5.24	168	260	H	
			5.725	43.17	Pk	34.5	-17.4	0	60.27	-	-	68.2	-7.93	108	118	V	
			5.728821	44.61	Pk	34.5	-17.3	0	61.81	-	-	68.2	-6.39	108	118	V	
EHT80 (SU Mode)	5530	6 + 5	* 5.46	51.62	Pk	34.6	-34.8	0	51.42	-	-	68.2	-16.78	208	138	H	
			* 5.458363	61.38	Pk	34.6	-34.8	0	61.18	-	-	74	-12.82	208	138	H	
			* 5.46	38.61	RMS	34.6	-34.8	0	38.41	54	-15.59	-	-	208	138	H	
			* 5.453062	43.77	RMS	34.6	-34.8	0	43.57	54	-10.43	-	-	208	138	H	
			* 5.453062	43.77	RMS	34.6	-34.8	0	43.57	54	-10.43	-	-	208	138	H	
			5.467789	63.53	Pk	34.6	-34.8	0	63.33	-	-	68.2	-4.87	208	138	H	
			5.47	53.43	Pk	34.6	-34.8	0	53.23	-	-	68.2	-14.97	208	138	H	
			5.47	39.34	RMS	34.6	-34.8	0	39.14	-	-	-	-	208	138	H	
			* 5.46	58.26	Pk	34.6	-34.8	0	58.06	-	-	68.2	-10.14	170	105	V	
			* 5.456063	62.32	Pk	34.6	-34.8	0	62.12	-	-	74	-11.88	170	105	V	
			* 5.46	42.26	RMS	34.6	-34.8	0	42.06	54	-11.94	-	-	170	105	V	
			* 5.456638	44.77	RMS	34.6	-34.8	0	44.57	54	-9.43	-	-	170	105	V	
			* 5.456638	44.77	RMS	34.6	-34.8	0	44.57	54	-9.43	-	-	170	105	V	
			5.466089	63.28	Pk	34.6	-34.8	0	63.08	-	-	68.2	-5.12	170	105	V	
			5.47	59.94	Pk	34.6	-34.8	0	59.74	-	-	68.2	-8.46	170	105	V	
			5.47	43.33	RMS	34.6	-34.8	0	43.13	-	-	-	-	170	105	V	
	5610		5.725	61.47	Pk	34.6	-37	0	59.07	-	-	68.2	-9.13	246	126	H	
			5.725095	63.23	Pk	34.6	-37	0	60.83	-	-	68.2	-7.37	246	126	H	
			5.725	59.56	Pk	34.6	-37	0	57.16	-	-	68.2	-11.04	207	105	V	
			5.73164	65.17	Pk	34.6	-37	0	62.77	-	-	68.2	-5.43	207	105	V	
EHT160 (SU Mode)	5570 (Low BE)	6 + 5	* 5.46	62.69	Pk	34.6	-36.92	0	60.37	-	-	68.2	-7.83	156	134	H	
			* 5.459488	63.48	Pk	34.6	-36.93	0	61.15	-	-	74	-12.85	156	134	H	
			* 5.46	47.9	RMS	34.6	-36.92	0.14	45.72	54	-8.28	-	-	156	134	H	
			* 5.459332	48.36	RMS	34.6	-36.93	0.14	46.17	54	-7.83	-	-	156	134	H	
			* 5.459332	48.36	RMS	34.6	-36.93	0.14	46.17	54	-7.83	-	-	156	134	H	
			5.469954	64.96	Pk	34.6	-36.94	0	62.62	-	-	68.2	-5.58	156	134	H	
			5.47	60.93	Pk	34.6	-36.94	0	58.59	-	-	68.2	-9.61	156	134	H	
			5.47	47.42	RMS	34.6	-36.94	0.14	45.22	-	-	-	-	156	134	H	
			* 5.46	57.83	Pk	34.6	-36.92	0	55.51	-	-	68.2	-12.69	149	105	V	
			* 5.457132	66.15	Pk	34.6	-36.96	0	63.79	-	-	74	-10.21	149	105	V	
			* 5.46	47.47	RMS	34.6	-36.92	0.14	45.29	54	-8.71	-	-	149	105	V	
			* 5.447955	49.39	RMS	34.6	-36.95	0.14	47.18	54	-6.82	-	-	149	105	V	
			* 5.447955	49.39	RMS	34.6	-36.95	0.14	47.18	54	-6.82	-	-	149	105	V	
			5.467954	65.76	Pk	34.6	-36.97	0	63.39	-	-	68.2	-4.81	149	105	V	
			5.47	59.78	Pk	34.6	-36.94	0	57.44	-	-	68.2	-10.76	149	105	V	
			5.47	47.81	RMS	34.6	-36.94	0.14	45.61	-	-	-	-	149	105	V	
	5570 (High BE)		5.725	55.79	Pk	34.8	-34.1	0	56.49	-	-	68.2	-11.71	163	145	H	
			5.725028	56.46	Pk	34.8	-34.1	0	57.16	-	-	68.2	-11.04	163	145	H	
			5.725	55.41	Pk	34.8	-34.1	0	56.11	-	-	68.2	-12.09	176	105	V	
			5.727514	62.71	Pk	34.8	-34.1	0	63.41	-	-	68.2	-4.79	176	105	V	


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

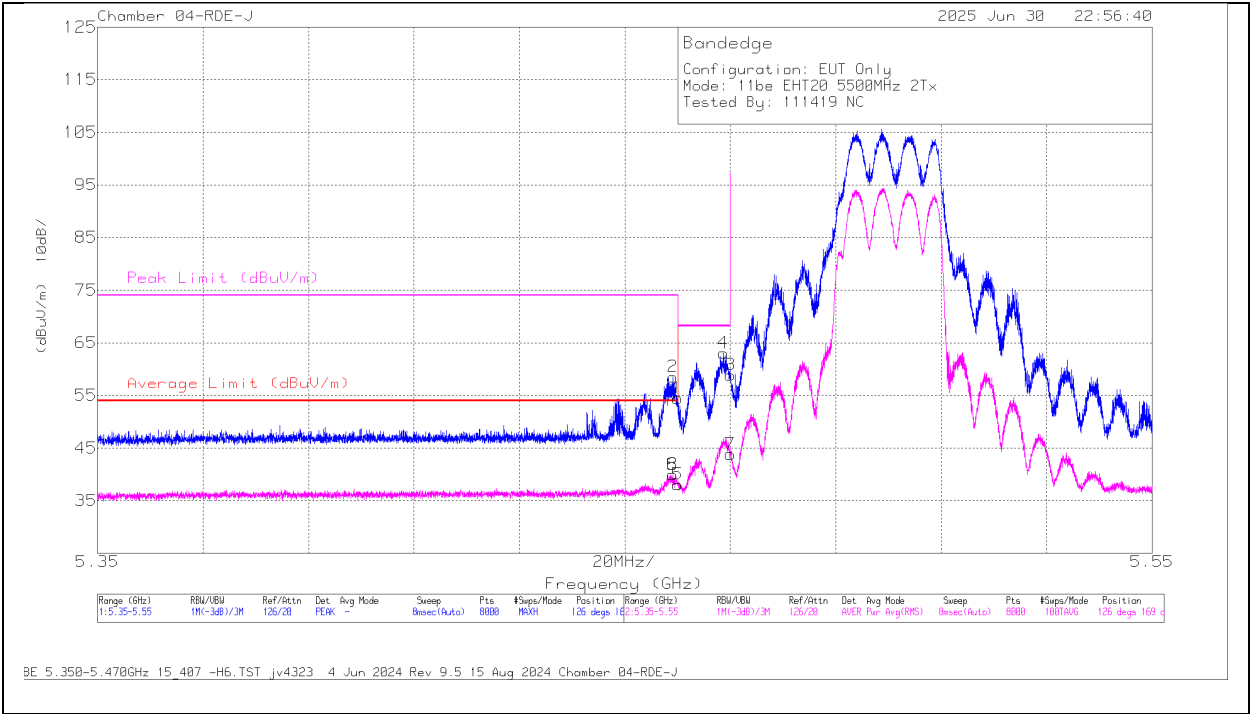


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	54.68	Pk	34.6	-34.8	0	54.48	-	-	68.2	-13.72	126	169	H
2	* 5.459088	58.73	Pk	34.6	-34.8	0	58.53	-	-	74	-15.47	126	169	H
5	* 5.46	38.27	RMS	34.6	-34.8	0	38.07	54	-15.93	-	-	126	169	H
6	* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H
8	* 5.459063	40.14	RMS	34.6	-34.8	0	39.94	54	-14.06	-	-	126	169	H
4	5.468689	63.24	Pk	34.6	-34.8	0	63.04	-	-	68.2	-5.16	126	169	H
3	5.47	59.07	Pk	34.6	-34.8	0	58.87	-	-	68.2	-9.33	126	169	H
7	5.47	44.04	RMS	34.6	-34.8	0	43.84	-	-	-	-	126	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL / 5500MHz)

VERTICAL RESULT

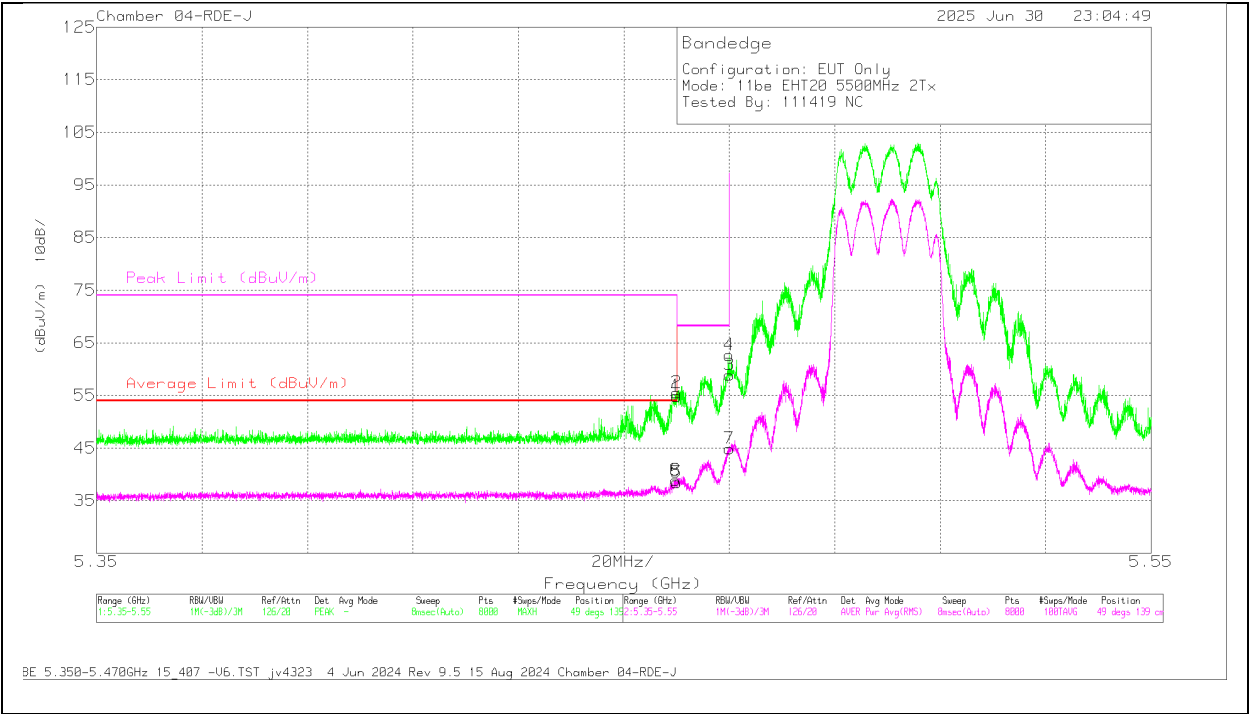


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.07	Pk	34.6	-34.8	0	54.87	-	-	68.2	-13.33	49	139	V
2	* 5.459988	55.72	Pk	34.6	-34.8	0	55.52	-	-	74	-18.48	49	139	V
5	* 5.46	38.66	RMS	34.6	-34.8	0	38.46	54	-15.54	-	-	49	139	V
6	* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V
8	* 5.459838	39.09	RMS	34.6	-34.8	0	38.89	54	-15.11	-	-	49	139	V
4	5.469939	62.85	Pk	34.6	-34.8	0	62.65	-	-	68.2	-5.55	49	139	V
3	5.47	59.09	Pk	34.6	-34.8	0	58.89	-	-	68.2	-9.31	49	139	V
7	5.47	45.1	RMS	34.6	-34.8	0	44.9	-	-	-	-	49	139	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

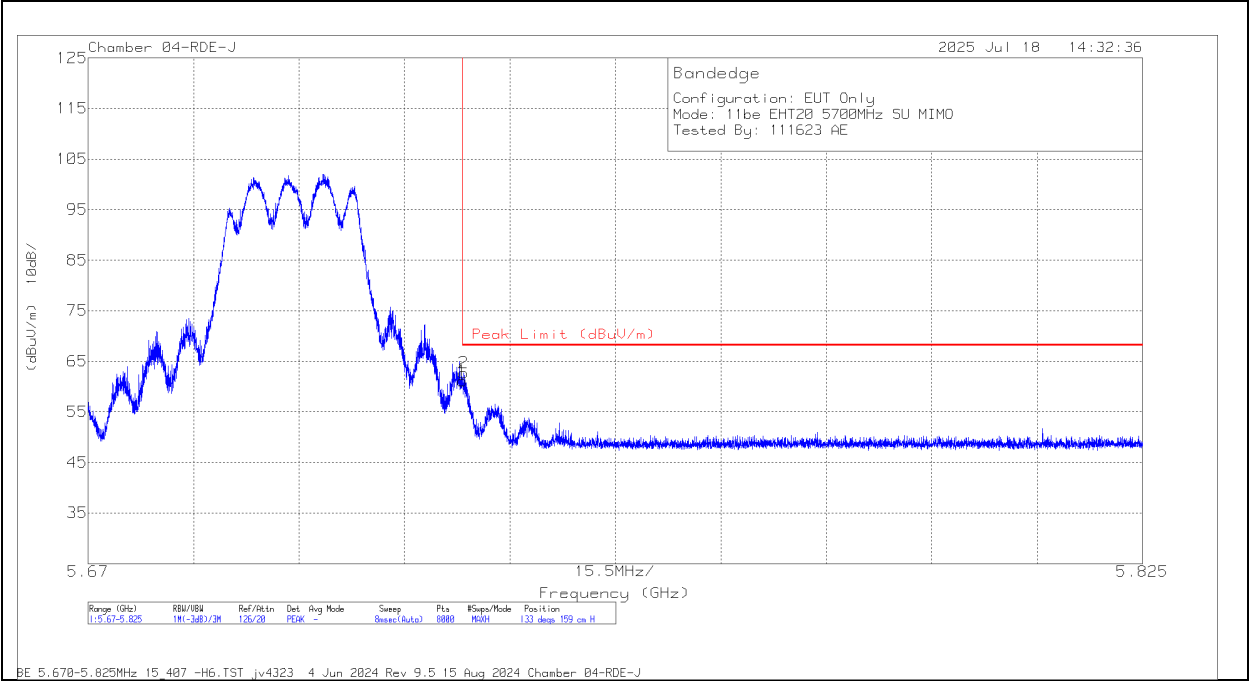


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.43	Pk	34.8	-34.1	0	61.13	68.2	-7.07	133	159	H
2	5.725186	62.06	Pk	34.8	-34.1	0	62.76	68.2	-5.44	133	159	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

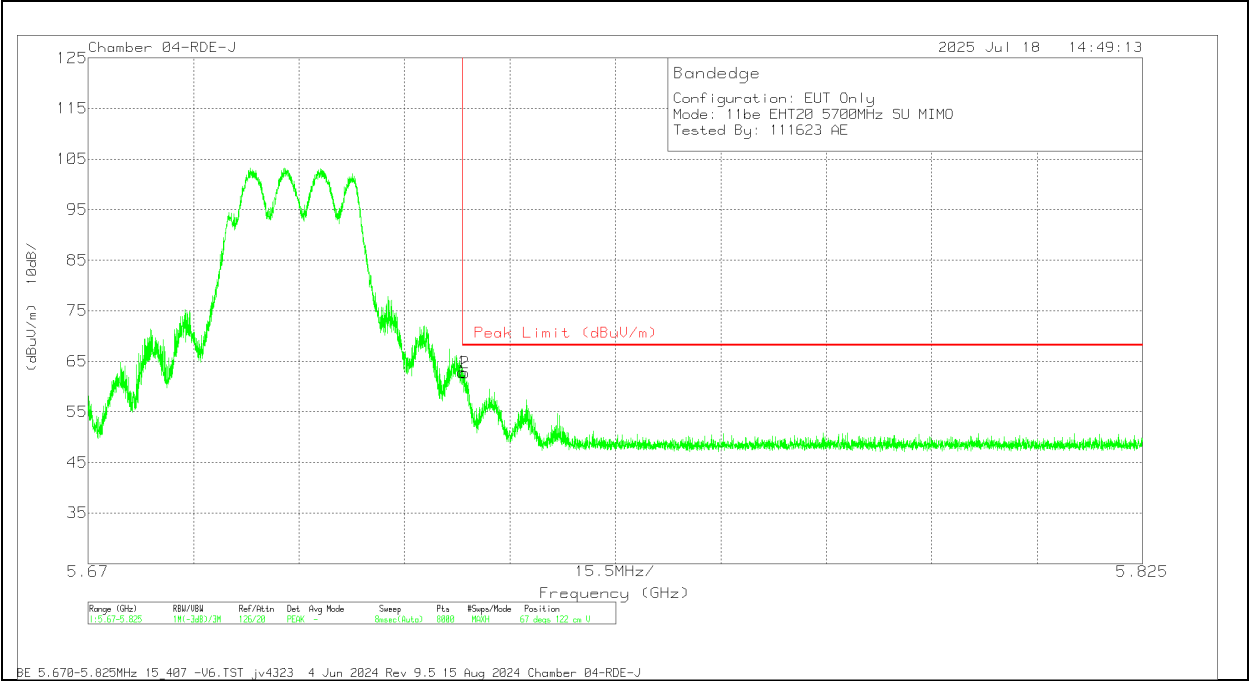

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	62.15	Pk	34.8	-34.1	0	62.85	68.2	-5.35	67	122	V
2	5.725418	62.05	Pk	34.8	-34.1	0	62.75	68.2	-5.45	67	122	V

Pk - Peak detector

1.1.22. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGES

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 (52T / Index 37)	5500	6 + 5	5.362978	46.93	RMS	34.6	-36.54	0	44.99	54	-9.01	-	-	115	304	H		
			5.362978	46.93	RMS	34.6	-36.54	0	44.99	54	-9.01	-	-	115	304	H		
			5.433777	59.09	Pk	34.6	-36.46	0	57.23	-	-	74	-16.77	115	304	H		
			5.46	55.84	Pk	34.5	-36.55	0	53.79	-	-	68.2	-14.41	115	304	H		
			5.46	45.39	RMS	34.5	-36.55	0	43.34	54	-10.66	-	-	115	304	H		
			5.469532	62.72	Pk	34.5	-36.44	0	60.78	-	-	68.2	-7.42	115	304	H		
			5.47	62.04	Pk	34.5	-36.46	0	60.08	-	-	68.2	-8.12	115	304	H		
			5.47	45.05	RMS	34.5	-36.46	0	43.09	-	-	-	-	115	304	H		
			5.358355	58.87	Pk	34.6	-36.57	0	56.9	-	-	74	-17.1	173	339	V		
			5.363422	47	RMS	34.6	-36.54	0	45.06	54	-8.94	-	-	173	339	V		
			5.363422	47	RMS	34.6	-36.54	0	45.06	54	-8.94	-	-	173	339	V		
			5.46	56.33	Pk	34.5	-36.55	0	54.28	-	-	68.2	-13.92	173	339	V		
			5.46	45.42	RMS	34.5	-36.55	0	43.37	54	-10.63	-	-	173	339	V		
			5.46931	62.46	Pk	34.5	-36.43	0	60.53	-	-	68.2	-7.67	173	339	V		
			5.47	60.17	Pk	34.5	-36.46	0	58.21	-	-	68.2	-9.99	173	339	V		
			5.47	45.76	RMS	34.5	-36.46	0	43.8	-	-	-	-	173	339	V		
			EHT20 (52T / Index 40)	5700	5.725	61.11	Pk	34.8	-36.16	0	59.75	-	-	68.2	-8.45	9	196	H
					5.727986	61.53	Pk	34.8	-36.29	0	60.04	-	-	68.2	-8.16	9	196	H
					5.725	61.39	Pk	34.8	-36.16	0	60.03	-	-	68.2	-8.17	340	102	V
5.725042	62	Pk			34.8	-36.16	0	60.64	-	-	68.2	-7.56	340	102	V			
EHT40 (242T / Index 61)	5510	6 + 5			* 5.460	43.26	Pk	34.6	-23.31	0	54.55	-	-	68.2	-13.65	39	206	H
			* 5.458332	45.79	Pk	34.6	-23.4	0	56.99	-	-	74	-17.01	39	206	H		
			* 5.460	30.03	RMS	34.6	-23.31	0	41.32	54	-12.68	-	-	39	206	H		
			* 5.456088	30.57	RMS	34.6	-23.35	0	41.82	54	-12.18	-	-	39	206	H		
			* 5.456088	30.57	RMS	34.6	-23.35	0	41.82	54	-12.18	-	-	39	206	H		
			5.46691	51.65	Pk	34.6	-23.18	0	63.07	-	-	68.2	-5.13	39	206	H		
			5.47	49.16	Pk	34.6	-23.27	0	60.49	-	-	68.2	-7.71	39	206	H		
			5.47	31.37	RMS	34.6	-23.27	0	42.7	-	-	-	-	39	206	H		
			* 5.460	40.16	Pk	34.6	-23.31	0	51.45	-	-	68.2	-16.75	33	134	V		
			* 5.459866	43.63	Pk	34.6	-23.33	0	54.9	-	-	74	-19.1	33	134	V		
			* 5.460	30.08	RMS	34.6	-23.31	0	41.37	54	-12.63	-	-	33	134	V		
			* 5.353178	30.2	RMS	34.6	-23.09	0	41.71	54	-12.29	-	-	33	134	V		
			* 5.353178	30.2	RMS	34.6	-23.09	0	41.71	54	-12.29	-	-	33	134	V		
			5.469977	51.17	Pk	34.6	-23.27	0	62.5	-	-	68.2	-5.7	33	134	V		
			5.47	47.13	Pk	34.6	-23.27	0	58.46	-	-	68.2	-9.74	33	134	V		
			5.47	31.35	RMS	34.6	-23.27	0	42.68	-	-	-	-	33	134	V		
			EHT40 (242T / Index 62)	5670	5.725	40.56	Pk	34.7	-22.81	0	52.45	-	-	68.2	-15.75	51	202	H
					5.766409	43.37	Pk	34.8	-22.76	0	55.41	-	-	68.2	-12.79	51	202	H
					5.725	41.27	Pk	34.7	-22.81	0	53.16	-	-	68.2	-15.04	356	173	V
5.743848	42.77	Pk			34.8	-22.55	0	55.02	-	-	68.2	-13.18	356	173	V			
EHT40 ((106+26)T / Index 82)	5510	6 + 5	* 5.460	50.67	Pk	34.6	-30.4	0	54.87	-	-	68.2	-13.33	59	240	H		
			* 5.441411	53.11	Pk	34.6	-30.4	0	57.31	-	-	74	-16.69	59	240	H		
			* 5.460	39.96	RMS	34.6	-30.4	0	44.16	54	-9.84	-	-	59	240	H		
			* 5.378228	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	59	240	H		
			* 5.378228	41.1	RMS	34.6	-30.5	0	45.2	54	-8.8	-	-	59	240	H		
			5.469589	59.19	Pk	34.6	-30.4	0	63.39	-	-	68.2	-4.81	59	240	H		
			5.47	56.01	Pk	34.6	-30.4	0	60.21	-	-	68.2	-7.99	59	240	H		
			5.47	40.28	RMS	34.6	-30.4	0	44.48	-	-	-	-	59	240	H		
			* 5.460	50.89	Pk	34.6	-30.4	0	55.09	-	-	68.2	-13.11	48	118	V		
			* 5.457663	53.13	Pk	34.6	-30.4	0	57.33	-	-	74	-16.67	48	118	V		
			* 5.460	39.66	RMS	34.6	-30.4	0	43.86	54	-10.14	-	-	48	118	V		
			* 5.439736	40.85	RMS	34.6	-30.4	0	45.05	54	-8.95	-	-	48	118	V		
			* 5.439736	40.85	RMS	34.6	-30.4	0	45.05	54	-8.95	-	-	48	118	V		
			5.469914	57.05	Pk	34.6	-30.4	0	61.25	-	-	68.2	-6.95	48	118	V		
			5.47	55.91	Pk	34.6	-30.4	0	60.11	-	-	68.2	-8.09	48	118	V		
			5.47	40.27	RMS	34.6	-30.4	0	44.47	-	-	-	-	48	118	V		
			EHT40 ((106+26)T / Index 85)	5670	5.725	50.4	Pk	34.6	-29.9	0	55.1	-	-	68.2	-13.1	70	260	H
					5.782639	52.82	Pk	34.8	-29.8	0	57.82	-	-	68.2	-10.38	70	260	H
					5.725	50.35	Pk	34.6	-29.9	0	55.05	-	-	68.2	-13.15	15	171	V
5.803973	52.51	Pk			34.9	-29.8	0	57.61	-	-	68.2	-10.59	15	171	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (484T / Index 65)	5530	6 + 5	5.45711	63.51	Pk	34.6	-38.78	0	59.33	-	-	74	-14.67	251	135	H
			5.457266	47.94	RMS	34.6	-38.78	0	43.76	54	-10.24	-	-	251	135	H
			5.457266	47.94	RMS	34.6	-38.78	0	43.76	54	-10.24	-	-	251	135	H
			5.46	61.59	Pk	34.6	-38.71	0	57.48	-	-	68.2	-10.72	251	135	H
			5.46	47.03	RMS	34.6	-38.71	0	42.92	54	-11.08	-	-	251	135	H
			5.466866	67.34	Pk	34.6	-38.76	0	63.18	-	-	68.2	-5.02	251	135	H
			5.47	65.35	Pk	34.6	-38.76	0	61.19	-	-	68.2	-7.01	251	135	H
			5.47	47.38	RMS	34.6	-38.76	0	43.22	-	-	-	-	251	135	H
			5.456021	63.5	Pk	34.6	-38.79	0	59.31	-	-	74	-14.69	196	123	V
			5.456688	48.07	RMS	34.6	-38.78	0	43.89	54	-10.11	-	-	196	123	V
			5.456688	48.07	RMS	34.6	-38.78	0	43.89	54	-10.11	-	-	196	123	V
			5.46	61.35	Pk	34.6	-38.71	0	57.24	-	-	68.2	-10.96	196	123	V
			5.46	47.58	RMS	34.6	-38.71	0	43.47	54	-10.53	-	-	196	123	V
			5.466443	67.21	Pk	34.6	-38.79	0	63.02	-	-	68.2	-5.18	196	123	V
			5.47	66.89	Pk	34.6	-38.76	0	62.73	-	-	68.2	-5.47	196	123	V
EHT80 (484T / Index 66)	5610		5.47	48.6	RMS	34.6	-38.76	0	44.44	-	-	-	-	196	123	V
			5.725	57.03	Pk	35.1	-38.19	0	53.94	-	-	68.2	-14.26	270	205	H
			5.754958	59.39	Pk	35.1	-38.07	0	56.42	-	-	68.2	-11.78	270	205	H
			5.725	58.37	Pk	35.1	-38.19	0	55.28	-	-	68.2	-12.92	202	106	V
EHT80 (52T / Index 37)	5530	6 + 5	5.728891	60	Pk	35.1	-38.22	0	56.88	-	-	68.2	-11.32	202	106	V
			* 5.460	57.1	Pk	34.6	-35.79	0	55.91	-	-	68.2	-12.29	216	111	H
			* 5.450021	58.3	Pk	34.6	-35.91	0	56.99	-	-	74	-17.01	216	111	H
			* 5.460	45.53	RMS	34.6	-35.79	0.16	44.5	54	-9.5	-	-	216	111	H
			* 5.457021	46.4	RMS	34.6	-35.93	0.16	45.23	54	-8.77	-	-	216	111	H
			* 5.457021	46.4	RMS	34.6	-35.93	0.16	45.23	54	-8.77	-	-	216	111	H
			5.466932	63.7	Pk	34.6	-35.74	0	62.56	-	-	68.2	-5.64	216	111	H
			5.47	62.14	Pk	34.6	-35.86	0	60.88	-	-	68.2	-7.32	216	111	H
			5.47	45.69	RMS	34.6	-35.86	0.16	44.59	-	-	-	-	216	111	H
			* 5.460	55.87	Pk	34.6	-35.79	0	54.68	-	-	68.2	-13.52	203	139	V
			* 5.359689	58.79	Pk	34.6	-36.18	0	57.21	-	-	74	-16.79	203	139	V
			* 5.460	45.45	RMS	34.6	-35.79	0.16	44.42	54	-9.58	-	-	203	139	V
			* 5.436466	46.1	RMS	34.6	-35.92	0.16	44.94	54	-9.06	-	-	203	139	V
			* 5.436466	46.1	RMS	34.6	-35.92	0.16	44.94	54	-9.06	-	-	203	139	V
			5.467265	62.29	Pk	34.6	-35.76	0	61.13	-	-	68.2	-7.07	203	139	V
			5.47	60.42	Pk	34.6	-35.86	0	59.16	-	-	68.2	-9.04	203	139	V
EHT80 (52T / Index 52)	5610		5.47	45.25	RMS	34.6	-35.86	0.16	44.15	-	-	-	-	203	139	V
			5.725	56.47	Pk	34.6	-37	0	54.07	-	-	68.2	-14.13	237	109	H
			5.727928	59.75	Pk	34.6	-37	0	57.35	-	-	68.2	-10.85	237	109	H
			5.725	56.9	Pk	34.6	-37	0	54.5	-	-	68.2	-13.7	212	128	V
EHT160 (242T / Index 61)	5570 (Lower)	6 + 5	5.820634	59.04	Pk	34.9	-36.9	0	57.04	-	-	68.2	-11.16	212	128	V
			5.3556	46.87	RMS	34.6	-36.58	0.1	44.99	54	-9.01	-	-	199	267	H
			5.3556	46.87	RMS	34.6	-36.58	0.1	44.99	54	-9.01	-	-	199	267	H
			5.403888	58.88	Pk	34.6	-36.55	0	56.93	-	-	74	-17.07	199	267	H
			5.46	55.76	Pk	34.5	-36.55	0	53.71	-	-	68.2	-14.49	199	267	H
			5.46	45.81	RMS	34.5	-36.55	0.1	43.86	54	-10.14	-	-	199	267	H
			5.469488	65.35	Pk	34.5	-36.44	0	63.41	-	-	68.2	-4.79	199	267	H
			5.47	63.92	Pk	34.5	-36.46	0	61.96	-	-	68.2	-6.24	199	267	H
			5.47	45.74	RMS	34.5	-36.46	0.1	43.88	-	-	-	-	199	267	H
			5.355133	47	RMS	34.6	-36.59	0.1	45.11	54	-8.89	-	-	184	373	V
			5.355133	47	RMS	34.6	-36.59	0.1	45.11	54	-8.89	-	-	184	373	V
			5.448488	58.97	Pk	34.5	-36.52	0	56.95	-	-	74	-17.05	184	373	V
			5.46	55.73	Pk	34.5	-36.55	0	53.68	-	-	68.2	-14.52	184	373	V
			5.46	44.96	RMS	34.5	-36.55	0.1	43.01	54	-10.99	-	-	184	373	V
			5.469288	61.77	Pk	34.5	-36.43	0	59.84	-	-	68.2	-8.36	184	373	V
			5.47	61.33	Pk	34.5	-36.46	0	59.37	-	-	68.2	-8.83	184	373	V
EHT160 (242T / Index 564)	5570 (Upper)		5.47	45.44	RMS	34.5	-36.46	0.1	43.58	-	-	-	-	184	373	V
			5.725	55.36	Pk	34.5	-35	0	54.86	-	-	68.2	-13.34	5	144	H
			5.745863	57.98	Pk	34.5	-34.9	0	57.58	-	-	68.2	-10.62	5	144	H
			5.725	54.8	Pk	34.5	-35	0	54.3	-	-	68.2	-13.9	330	116	V
EHT160 (52T / Index 37)	5570 (Lower)	6 + 5	5.810746	57.23	Pk	34.7	-34.6	0	57.33	-	-	68.2	-10.87	330	116	V
			5.39	60.79	Pk	34.4	-38.1	0	57.09	-	-	74	-16.91	357	111	H
			5.417688	48.17	RMS	34.4	-37.95	0.2	44.82	54	-9.18	-	-	357	111	H
			5.417688	48.17	RMS	34.4	-37.95	0.2	44.82	54	-9.18	-	-	357	111	H
			5.46	58.16	Pk	34.4	-37.94	0	54.62	-	-	68.2	-13.58	357	111	H
			5.46	47.48	RMS	34.4	-37.94	0.2	44.14	54	-9.86	-	-	357	111	H
			5.469577	66.19	Pk	34.4	-37.79	0	62.8	-	-	68.2	-5.4	357	111	H
			5.47	64	Pk	34.4	-37.77	0	60.63	-	-	68.2	-7.57	357	111	H
			5.47	47.62	RMS	34.4	-37.77	0.2	44.45	-	-	-	-	357	111	H
			5.404555	48.03	RMS	34.4	-38.03	0.2	44.6	54	-9.4	-	-	311	336	V
			5.404555	48.03	RMS	34.4	-38.03	0.2	44.6	54	-9.4	-	-	311	336	V
			5.451243	60.15	Pk	34.4	-37.93	0	56.62	-	-	74	-17.38	311	336	V
			5.46	58.15	Pk	34.4	-37.94	0	54.61	-	-	68.2	-13.59	311	336	V
			5.46	47.27	RMS	34.4	-37.94	0.2	43.93	54	-10.07	-	-	311	336	V
			5.46971	64.45	Pk	34.4	-37.78	0	61.07	-	-	68.2	-7.13	311	336	V
EHT160 (52T / Index 552)	5570 (Upper)		5.47	63.95	Pk	34.4	-37.77	0	60.58	-	-	68.2	-7.62	311	336	V
			5.47	46.32	RMS	34.4	-37.77	0.2	43.15	-	-	-	-	311	336	V
			5.725	55.09	Pk	34.5	-35	0	54.59	-	-	68.2	-13.61	44	302	H
			5.747195	57.66	Pk	34.5	-34.8	0	57.36	-	-	68.2	-10.84	44	302	H
			5.725	56.22	Pk	34.5	-35	0	55.72	-	-	68.2	-12.48	328	104	V
			5.794794	57.3	Pk	34.6	-34.72	0	57.18	-	-	68.2	-11.02	328	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 52


BANDEDGE (LOW CHANNEL / 5500MHz)

HORIZONTAL RESULT

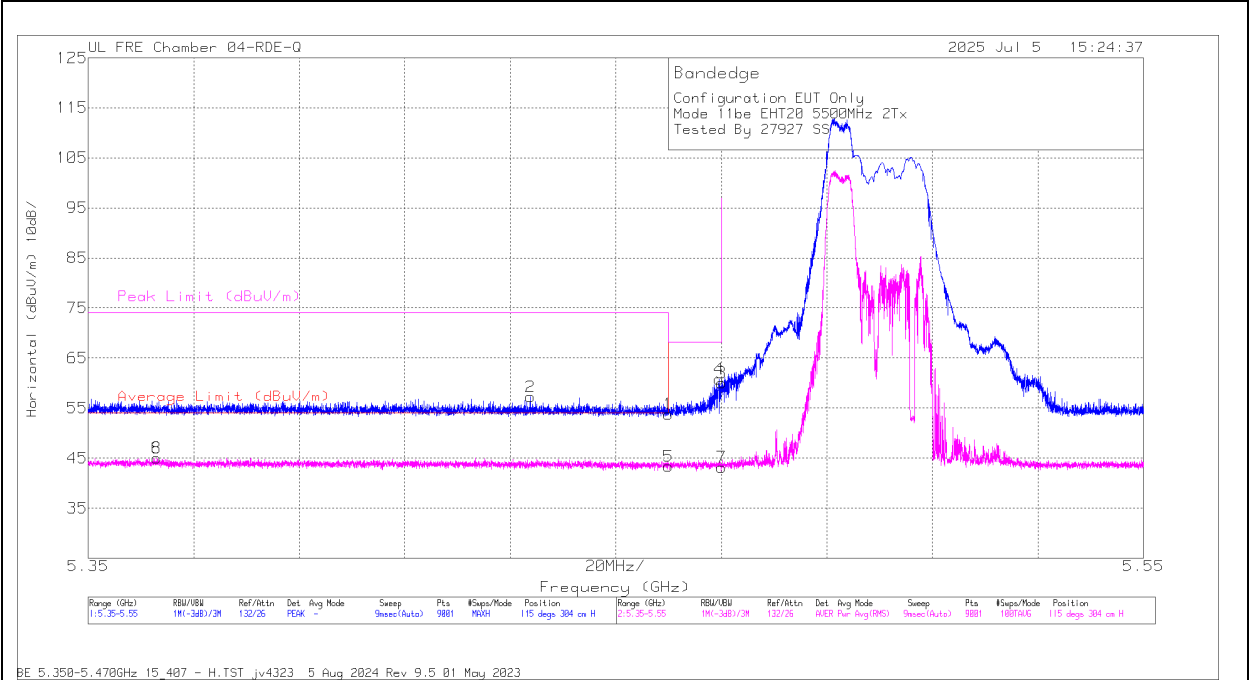

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	227741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	5.362978	46.93	RMS	34.6	0	-36.54	44.99	54	-9.01	-	-	115	304	H
8	5.362978	46.93	RMS	34.6	0	-36.54	44.99	54	-9.01	-	-	115	304	H
2	5.433777	59.09	Pk	34.6	0	-36.46	57.23	-	-	74	-16.77	115	304	H
1	5.46	55.84	Pk	34.5	0	-36.55	53.79	-	-	68.2	-14.41	115	304	H
5	5.46	45.39	RMS	34.5	0	-36.55	43.34	54	-10.66	-	-	115	304	H
4	5.469532	62.72	Pk	34.5	0	-36.44	60.78	-	-	68.2	-7.42	115	304	H
3	5.47	62.04	Pk	34.5	0	-36.46	60.08	-	-	68.2	-8.12	115	304	H
7	5.47	45.05	RMS	34.5	0	-36.46	43.09	-	-	-	-	115	304	H

Pk - Peak detector
RMS - RMS detection

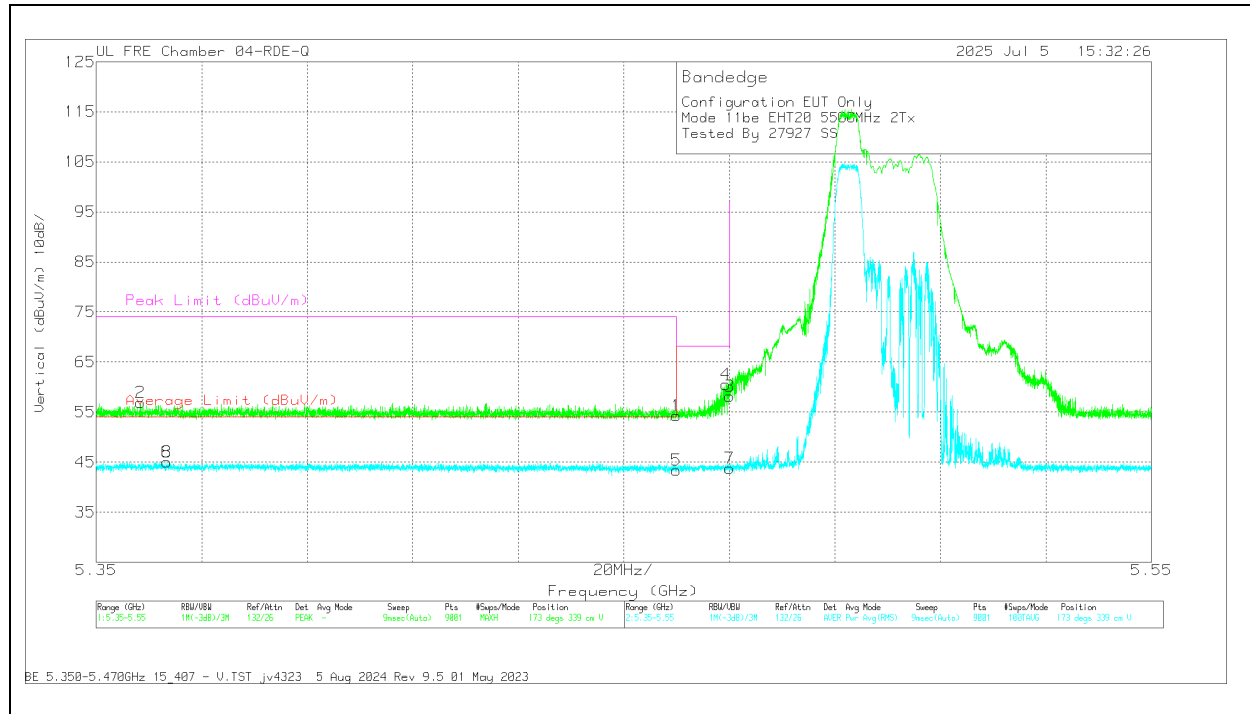2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU 52**BANDEDGE (LOW CHANNEL / 5500MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.358355	58.87	Pk	34.6	0	-36.57	56.9	-	-	74	-17.1	173	339	V
6	5.363422	47	RMS	34.6	0	-36.54	45.06	54	-8.94	-	-	173	339	V
8	5.363422	47	RMS	34.6	0	-36.54	45.06	54	-8.94	-	-	173	339	V
1	5.46	56.33	Pk	34.5	0	-36.55	54.28	-	-	68.2	-13.92	173	339	V
5	5.46	45.42	RMS	34.5	0	-36.55	43.37	54	-10.63	-	-	173	339	V
4	5.46931	62.46	Pk	34.5	0	-36.43	60.53	-	-	68.2	-7.67	173	339	V
3	5.47	60.17	Pk	34.5	0	-36.46	58.21	-	-	68.2	-9.99	173	339	V
7	5.47	45.76	RMS	34.5	0	-36.46	43.8	-	-	-	-	173	339	V


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU, 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

HORIZONTAL RESULT

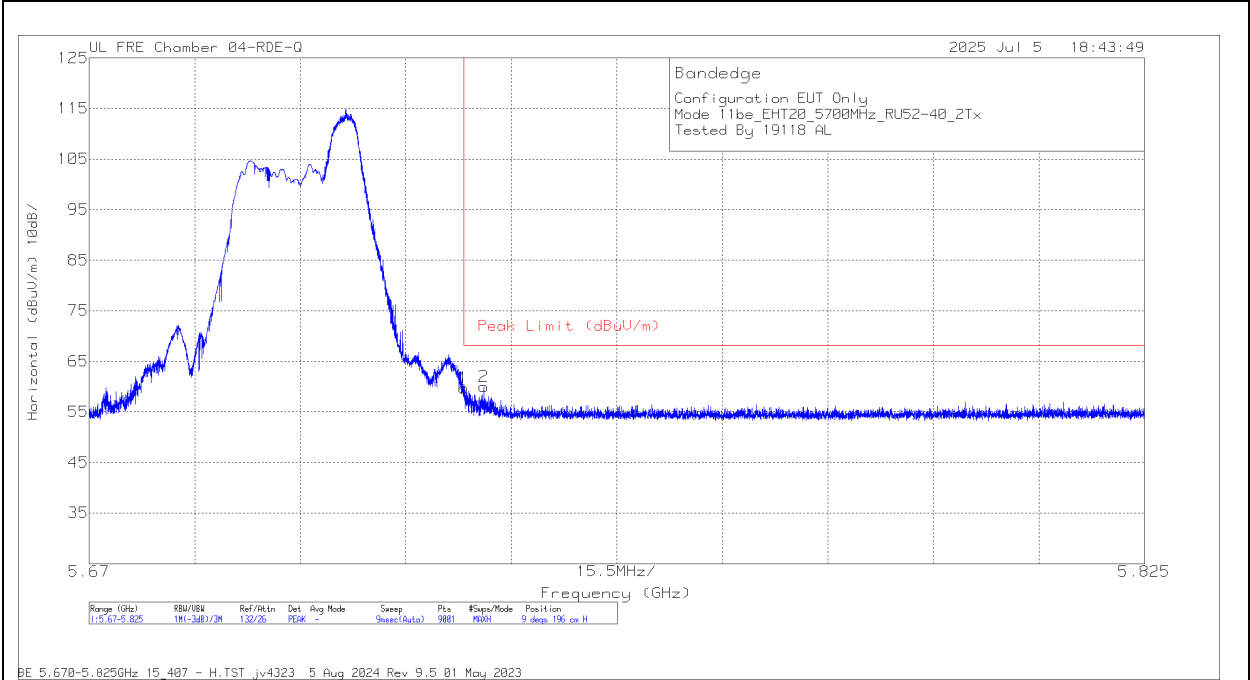


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.11	Pk	34.8	0	-36.16	59.75	68.2	-8.45	9	196	H
2	5.727986	61.53	Pk	34.8	0	-36.29	60.04	68.2	-8.16	9	196	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: Partial RU, 52

BANDEDGE (HIGH CHANNEL / 5700MHz)

VERTICAL RESULT

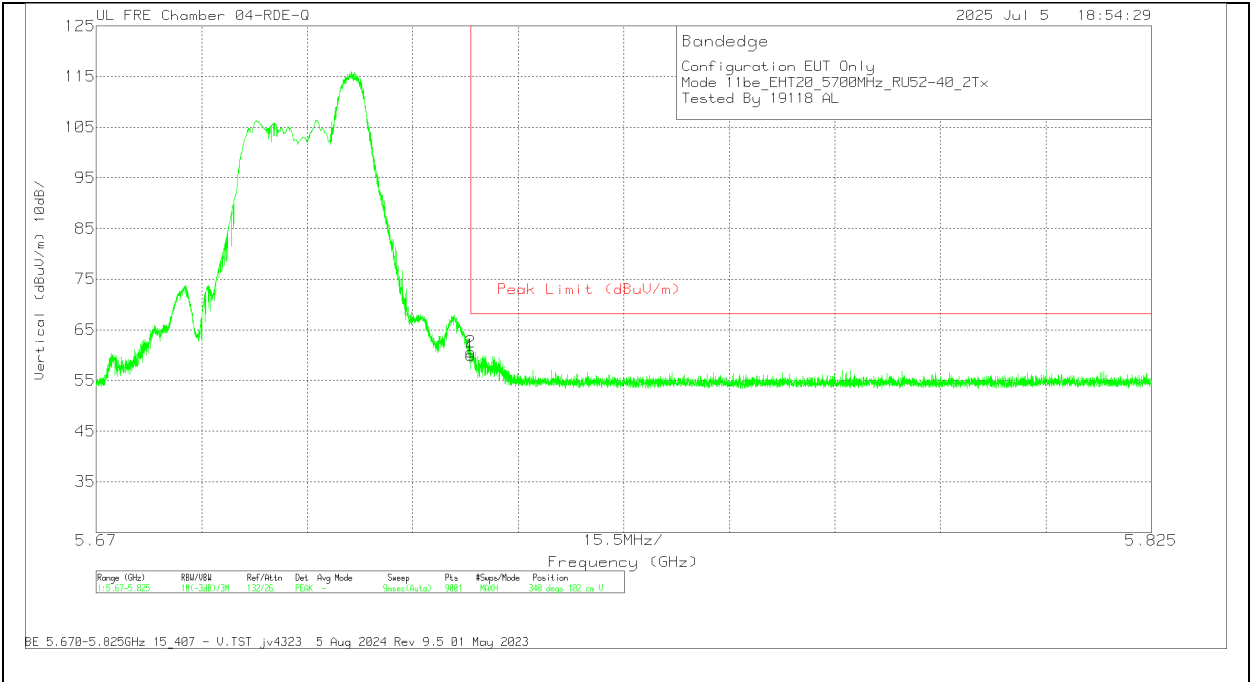

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	61.39	Pk	34.8	0	-36.16	60.03	68.2	-8.17	340	102	V
2	5.725042	62	Pk	34.8	0	-36.16	60.64	68.2	-7.56	340	102	V

Pk - Peak detector

1.1.23. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5500	6 + 5	* 11.601782	40.57	ADR	38.3	-40.4	0	38.47	54	-15.53	-	-	360	200	V
			* 11.603055	40.6	ADR	38.3	-40.3	0	38.6	54	-15.4	-	-	360	101	H
			* 11.606698	52.13	PK-U	38.3	-40.4	0	50.03	-	-	74	-23.97	360	200	V
			* 11.618135	52.25	PK-U	38.3	-40.4	0	50.15	-	-	74	-23.85	360	101	H
			* 1.270622	49.21	ADR	29.1	-48.8	0	29.51	54	-24.49	-	-	360	101	V
			* 1.271049	49.2	ADR	29.1	-48.8	0	29.5	54	-24.5	-	-	360	101	H
			* 1.272149	60.66	PK-U	29.1	-49	0	40.76	-	-	74	-33.24	360	101	V
			* 1.273683	60.59	PK-U	29.2	-48.7	0	41.09	-	-	74	-32.91	360	101	H
			* 3.748861	56.19	PK-U	33.3	-45.8	0	43.69	-	-	74	-30.31	360	101	V
			* 3.760042	56.8	PK-U	33.4	-45.7	0	44.5	-	-	74	-29.5	360	101	H
			* 3.763408	44.76	ADR	33.4	-45.8	0	32.36	54	-21.64	-	-	360	101	H
			* 3.765188	44.71	ADR	33.4	-45.6	0	32.51	54	-21.49	-	-	360	101	V
			* 1.269034	60.2	PK-U	29.1	-48.8	0	40.5	-	-	74	-33.5	320	327	H
			* 1.26937	60.29	PK-U	29.1	-48.8	0	40.59	-	-	74	-33.41	212	132	V
			* 1.269928	49.26	ADR	29.1	-48.8	0	29.56	54	-24.44	-	-	320	327	H
	5580	6 + 5	* 1.271917	49.38	ADR	29.1	-49	0	29.48	54	-24.52	-	-	212	132	V
			* 3.814658	56.42	PK-U	33.5	-45.7	0	44.22	-	-	74	-29.78	255	116	V
			* 3.814698	44.81	ADR	33.5	-45.7	0	32.61	54	-21.39	-	-	255	116	V
			* 3.820184	44.68	ADR	33.5	-45.5	0	32.68	54	-21.32	-	-	171	130	H
			* 3.828097	56.1	PK-U	33.5	-45.4	0	44.2	-	-	74	-29.8	171	130	H
			9.945414	53.78	PK-U	37.2	-41.7	0	49.28	-	-	68.2	-18.92	303	229	H
			9.948336	54.2	PK-U	37.2	-41.5	0	49.9	-	-	68.2	-18.3	264	205	V
			* 11.444289	40.99	ADR	38.3	-40.6	0	38.69	54	-15.31	-	-	298	166	H
			* 11.46424	52.37	PK-U	38.3	-40.6	0	50.07	-	-	74	-23.93	298	166	H
			* 11.47653	40.85	ADR	38.3	-40.7	0	38.45	54	-15.55	-	-	189	130	V
	5700	6 + 5	* 11.47853	52.15	PK-U	38.3	-40.6	0	49.85	-	-	74	-24.15	189	130	V
			* 1.268069	49.18	ADR	29.1	-48.9	0	29.38	54	-24.62	-	-	155	209	V
			* 1.270776	60.82	PK-U	29.1	-48.8	0	41.12	-	-	74	-32.88	155	209	V
			* 1.270884	49.24	ADR	29.1	-48.8	0	29.54	54	-24.46	-	-	105	310	H
			* 1.277784	60.63	PK-U	29.2	-48.8	0	41.03	-	-	74	-32.97	105	310	H
			* 3.931459	44.31	ADR	33.4	-45.5	0	32.21	54	-21.79	-	-	267	188	V
			* 3.931506	55.73	PK-U	33.4	-45.5	0	43.63	-	-	74	-30.37	267	188	V
			* 3.937292	55.57	PK-U	33.4	-45.5	0	43.47	-	-	74	-30.53	205	124	H
			* 3.941552	44.22	ADR	33.4	-45.5	0	32.12	54	-21.88	-	-	205	124	H
			* 12.43688	40.6	ADR	39	-39.4	0	40.2	54	-13.8	-	-	5	265	V
			* 12.446262	52.05	PK-U	39	-39.2	0	51.85	-	-	74	-22.15	141	261	H
			* 12.454964	40.52	ADR	39	-39.5	0	40.02	54	-13.98	-	-	141	261	H
			* 12.45856	52.21	PK-U	39	-39.4	0	51.81	-	-	74	-22.19	5	265	V
			* 1.70415	48.57	ADR	29	-48.9	0	28.67	54	-25.33	-	-	169	187	H
	5720	6 + 5	* 1.707077	59.82	PK-U	29	-48.8	0	40.02	-	-	74	-33.98	169	187	H
			* 1.708437	59.61	PK-U	29	-48.8	0	39.81	-	-	74	-34.19	119	268	V
			* 3.869723	44.34	ADR	33.5	-45.5	0	32.34	54	-21.66	-	-	257	184	H
			* 3.87407	55.84	PK-U	33.5	-45.4	0	43.94	-	-	74	-30.06	229	296	V
			* 3.877503	55.51	PK-U	33.5	-45.3	0	43.71	-	-	74	-30.29	257	184	H
			* 3.87899	44.33	ADR	33.5	-45.3	0	32.53	54	-21.47	-	-	229	296	V
			1.743043	48.5	ADR	29.6	-48.9	0	29.2	-	-	-	-	119	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5510	6 + 5	* 1.289785	62.88	PK-U	29.2	-50.3	0	41.78	-	-	74	-32.22	0	101	H
			* 1.292458	51.39	ADR	29.2	-50.25	0	30.34	54	-23.66	-	-	0	101	H
			* 4.711833	59.29	PK-U	33.8	-48.93	0	44.16	-	-	74	-29.84	0	101	H
			* 4.710513	47.76	ADR	33.8	-49	0	32.56	54	-21.44	-	-	0	101	H
			* 1.239265	63.18	PK-U	29.2	-50.23	0	42.15	-	-	74	-31.85	0	200	V
			* 1.240441	51.25	ADR	29.2	-50.26	0	30.19	54	-23.81	-	-	0	200	V
			* 4.867978	59.92	PK-U	33.9	-48.9	0	44.92	-	-	74	-29.08	0	200	V
			* 4.869257	48.23	ADR	33.9	-48.8	0	33.33	54	-20.67	-	-	0	200	V
			17.593359	56.26	PK-U	41.6	-41.6	0	56.26	-	-	68.2	-11.94	0	200	H
			17.608961	56.47	PK-U	41.6	-41.4	0	56.67	-	-	68.2	-11.53	0	200	V
	5550	6 + 5	* 1.290564	62.78	PK-U	29.2	-50.24	0	41.74	-	-	74	-32.26	0	200	H
			* 1.290917	51.37	ADR	29.2	-50.21	0	30.36	54	-23.64	-	-	0	200	H
			* 4.98379	59.25	PK-U	33.9	-48.3	0	44.85	-	-	74	-29.15	0	101	H
			* 4.985596	47.68	ADR	33.9	-48.3	0	33.28	54	-20.72	-	-	0	101	H
			* 1.236152	62.54	PK-U	29.2	-50.22	0	41.52	-	-	74	-32.48	0	101	V
			* 1.23476	50.95	ADR	29.2	-50.22	0	29.93	54	-24.07	-	-	0	101	V
			* 4.794942	59.25	PK-U	33.9	-48.7	0	44.45	-	-	74	-29.55	0	200	V
			* 4.796137	47.33	ADR	33.9	-48.7	0	32.53	54	-21.47	-	-	0	200	V
			17.625942	56.76	PK-U	41.6	-41.89	0	56.47	-	-	68.2	-11.73	0	200	V
			17.66125	57.15	PK-U	41.6	-42.7	0	56.05	-	-	68.2	-12.15	0	200	H
	5670	6 + 5	2.013019	49.86	ADR	31.7	-48.87	0	32.69	-	-	-	-	360	101	V
			2.01409	61.68	PK-U	31.7	-48.77	0	44.61	-	-	68.2	-23.59	360	101	H
			2.01791	49.89	ADR	31.7	-48.92	0	32.67	-	-	-	-	360	101	H
			2.019032	61.7	PK-U	31.7	-48.96	0	44.44	-	-	68.2	-23.76	360	101	V
			8.463831	57.58	PK-U	35.9	-44.77	0	48.71	-	-	74	-25.29	360	101	V
			8.469649	45.98	ADR	35.9	-44.59	0	37.29	54	-16.71	-	-	360	101	V
			8.470737	46.05	ADR	35.9	-44.5	0	37.45	54	-16.55	-	-	360	101	H
			8.478945	57.31	PK-U	35.9	-44.5	0	48.71	-	-	74	-25.29	360	101	H
			10.794143	59.54	PK-U	37.8	-45.23	0	52.11	-	-	74	-21.89	360	101	H
			10.801441	59.39	PK-U	37.8	-45.28	0	51.91	-	-	74	-22.09	360	101	V
	5710 (Straddle)	6 + 5	10.8018	47.32	ADR	37.8	-45.31	0	39.81	54	-14.19	-	-	360	101	H
			10.80405	47.39	ADR	37.8	-45.34	0	39.85	54	-14.15	-	-	360	101	V
			* 4.012205	58.43	PK-U	33.3	-47.8	0	43.93	-	-	74	-30.07	233	227	H
			* 4.013199	46.75	ADR	33.3	-47.8	0	32.25	54	-21.75	-	-	233	227	H
			* 4.015216	59.69	PK-U	33.3	-47.8	0	45.19	-	-	74	-28.81	223	271	V
			* 4.01272	46.66	ADR	33.3	-47.8	0	32.16	54	-21.84	-	-	223	271	V
			* 11.420832	56.41	PK-U	38.1	-45.88	0	48.63	-	-	74	-25.37	52	156	H
			* 11.419946	44.9	ADR	38.1	-45.8	0	37.2	54	-16.8	-	-	52	156	H
			* 11.418729	56.41	PK-U	38.1	-45.8	0	48.71	-	-	74	-25.29	85	364	V
			* 11.418775	45.18	ADR	38.1	-45.8	0	37.48	54	-16.52	-	-	85	364	V
			17.131486	57.37	PK-U	41.4	-43.9	0	54.87	-	-	68.2	-13.33	68	253	H
			17.134116	57.09	PK-U	41.4	-43.8	0	54.69	-	-	68.2	-13.51	69	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5530	6 + 5	* 4.155939	59.06	PK-U	33.3	-47.8	0	44.56	-	-	74	-29.44	28	208	H
			* 4.153723	46.11	ADR	33.3	-47.9	0	31.51	54	-22.49	-	-	28	208	H
			* 4.154405	57.93	PK-U	33.3	-47.86	0	43.37	-	-	74	-30.63	104	203	V
			* 4.156665	46.07	ADR	33.4	-47.8	0	31.67	54	-22.33	-	-	104	203	V
			* 11.063536	57.07	PK-U	37.8	-46.45	0	48.42	-	-	74	-25.58	216	368	H
			* 11.061633	45.06	ADR	37.8	-46.46	0	36.4	54	-17.6	-	-	216	368	H
			* 11.060428	57.42	PK-U	37.8	-46.4	0	48.82	-	-	74	-25.18	325	279	V
			* 11.061619	45.05	ADR	37.8	-46.46	0	36.39	54	-17.61	-	-	325	279	V
			16.588704	56.59	PK-U	41.3	-44.4	0	53.49	-	-	68.2	-14.71	85	199	H
			16.590023	56.35	PK-U	41.3	-44.4	0	53.25	-	-	68.2	-14.95	279	253	V
	5610	6 + 5	* 11.222299	55.36	PK-U	38	-44.2	0	49.16	-	-	74	-24.84	303	162	H
			* 11.222546	43.53	ADR	38	-44.2	0	37.33	54	-16.67	-	-	303	162	H
			* 11.222668	55.55	PK-U	38	-44.2	0	49.35	-	-	74	-24.65	28	194	V
			* 11.221329	43.51	ADR	38	-44.33	0	37.18	54	-16.82	-	-	28	194	V
			3.174268	58.42	PK-U	32.9	-47.7	0	43.62	-	-	68.2	-24.58	1	173	H
			3.178736	58.44	PK-U	32.9	-47.6	0	43.74	-	-	68.2	-24.46	161	335	V
			16.829349	54.46	PK-U	41.9	-41.8	0	54.56	-	-	68.2	-13.64	359	382	H
			16.832468	55.01	PK-U	41.9	-41.8	0	55.11	-	-	68.2	-13.09	183	235	V
			* 3.986117	57.54	PK-U	33.5	-47.3	0	43.74	-	-	74	-30.26	9	340	H
	5690 (Straddle)	6 + 5	* 3.986559	45.94	ADR	33.5	-47.3	0	32.14	54	-21.86	-	-	9	340	H
			* 3.985776	58.08	PK-U	33.5	-47.3	0	44.28	-	-	74	-29.72	63	270	V
			* 3.985779	45.85	ADR	33.5	-47.3	0	32.05	54	-21.95	-	-	63	270	V
			* 11.380972	55.47	PK-U	38	-44.3	0	49.17	-	-	74	-24.83	278	373	H
			* 11.382323	43.65	ADR	38	-44.23	0	37.42	54	-16.58	-	-	278	373	H
			* 11.384168	55.39	PK-U	38.1	-44.3	0	49.19	-	-	74	-24.81	106	283	V
			* 11.383529	43.6	ADR	38.1	-44.3	0	37.4	54	-16.6	-	-	106	283	V
			17.069301	53.29	PK-U	41.8	-41.2	0	53.89	-	-	68.2	-14.31	346	236	V
			17.073674	53.07	PK-U	41.8	-41.2	0	53.67	-	-	68.2	-14.53	278	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5570	6 + 5	* 4.558872	58.63	PK-U	34.1	-47.9	0	44.83	-	-	74	-29.17	0	200	H
			* 4.555349	46.56	ADR	34.1	-47.93	0	32.73	54	-21.27	-	-	0	200	H
			* 4.506412	58.57	PK-U	34	-47.8	0	44.77	-	-	74	-29.23	0	101	V
			* 4.506782	46.52	ADR	34	-47.8	0	32.72	54	-21.28	-	-	0	101	V
			1.730978	61.34	PK-U	29.3	-49.5	0	41.14	-	-	68.2	-27.06	0	101	H
			1.899662	61.33	PK-U	30.9	-49.3	0	42.93	-	-	68.2	-25.27	0	101	V
			16.546479	54.57	PK-U	41.4	-42.05	0	53.92	-	-	68.2	-14.28	0	199	H
			16.595885	54.74	PK-U	41.6	-41.81	0	54.53	-	-	68.2	-13.67	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

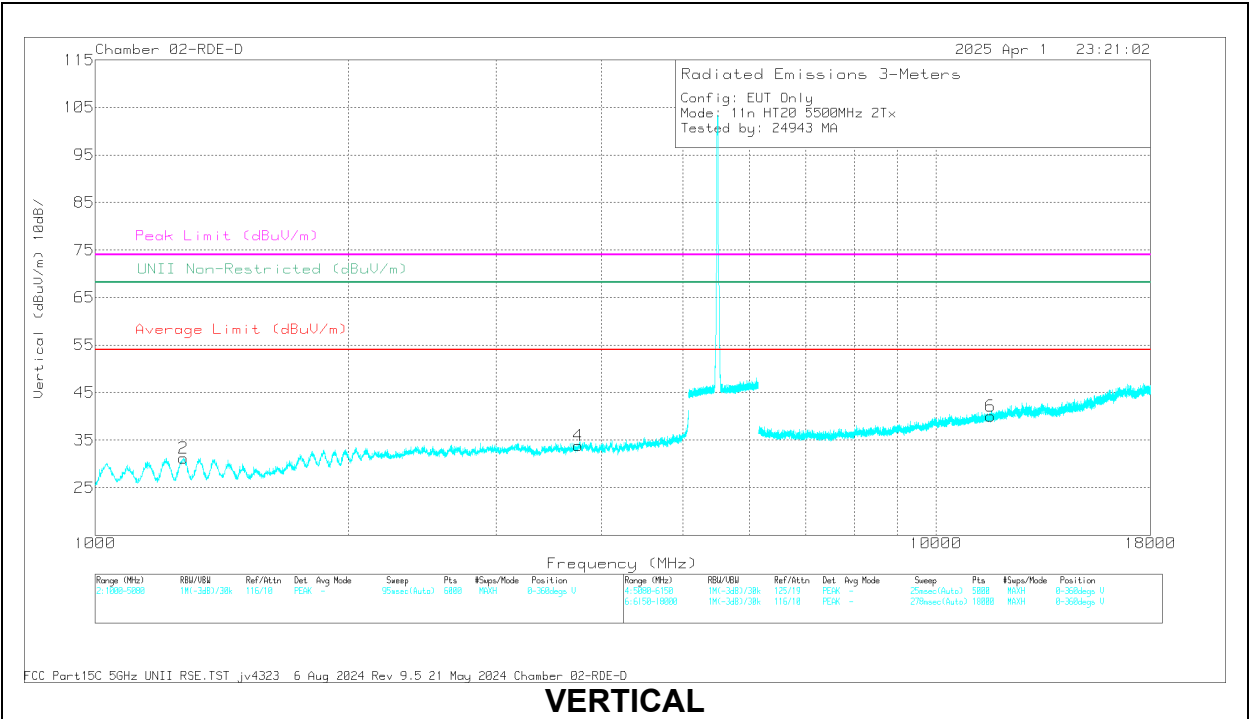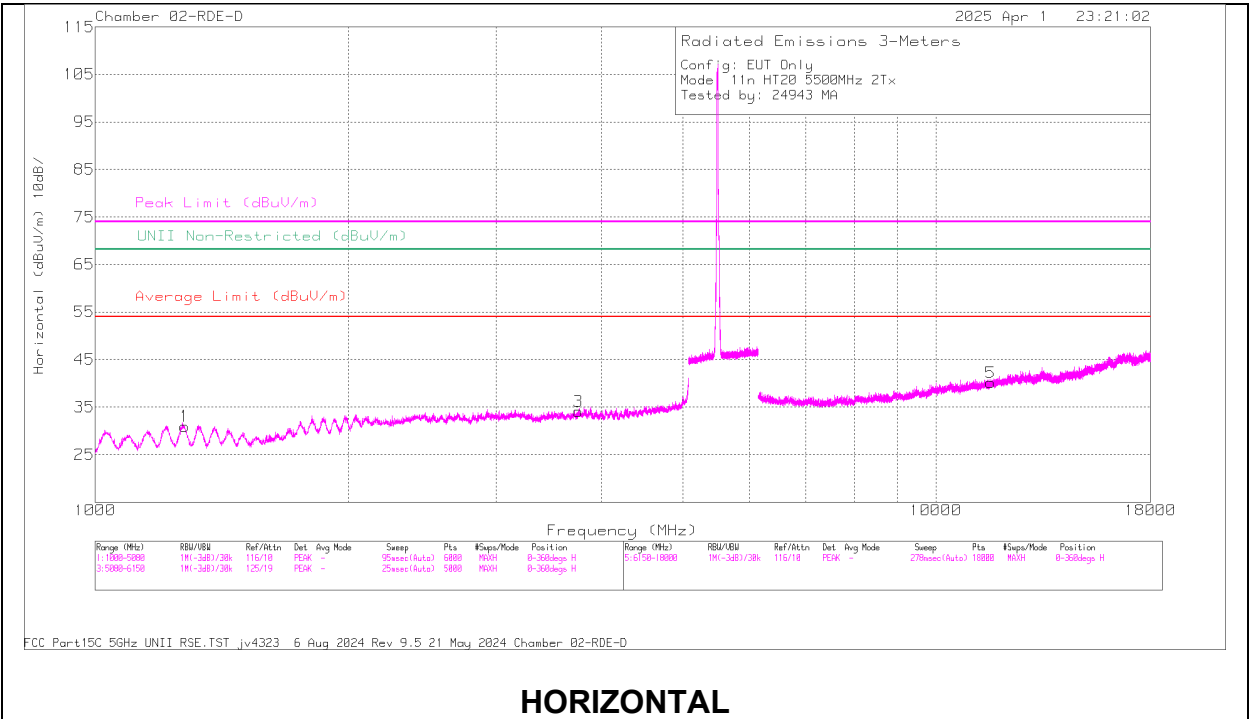

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 11.601782	40.57	ADR	38.3	-40.4	0	38.47	54	-15.53	-	-	360	200	V
5	* 11.603055	40.6	ADR	38.3	-40.3	0	38.6	54	-15.4	-	-	360	101	H
6	* 11.606698	52.13	PK-U	38.3	-40.4	0	50.03	-	-	74	-23.97	360	200	V
5	* 11.618135	52.25	PK-U	38.3	-40.4	0	50.15	-	-	74	-23.85	360	101	H
2	* 1.270622	49.21	ADR	29.1	-48.8	0	29.51	54	-24.49	-	-	360	101	V
1	* 1.271049	49.2	ADR	29.1	-48.8	0	29.5	54	-24.5	-	-	360	101	H
2	* 1.272149	60.66	PK-U	29.1	-49	0	40.76	-	-	74	-33.24	360	101	V
1	* 1.273683	60.59	PK-U	29.2	-48.7	0	41.09	-	-	74	-32.91	360	101	H
4	* 3.748861	56.19	PK-U	33.3	-45.8	0	43.69	-	-	74	-30.31	360	101	V
3	* 3.760042	56.8	PK-U	33.4	-45.7	0	44.5	-	-	74	-29.5	360	101	H
3	* 3.763408	44.76	ADR	33.4	-45.8	0	32.36	54	-21.64	-	-	360	101	H
4	* 3.765188	44.71	ADR	33.4	-45.6	0	32.51	54	-21.49	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.24. 802.11be MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5500	6 + 5	* 1.20507	60.61	PK-U	28.7	-48.8	0	40.51	-	-	74	-33.49	217	226	H
			* 1.213203	49.6	ADR	28.8	-48.8	0	29.6	54	-24.4	-	-	217	226	H
			* 1.213687	60.43	PK-U	28.8	-48.8	0	40.43	-	-	74	-33.57	178	116	V
			* 1.214727	49.34	ADR	28.8	-48.8	0	29.34	54	-24.66	-	-	178	116	V
			* 12.435465	40.48	ADR	39	-39.4	0	40.08	54	-13.92	-	-	65	244	V
			* 12.458273	51.84	PK-U	39	-39.5	0	51.34	-	-	74	-22.66	65	244	V
			* 12.459169	40.42	ADR	39	-39.4	0	40.02	54	-13.98	-	-	305	221	H
			* 12.468067	52.12	PK-U	39	-39.5	0	51.62	-	-	74	-22.38	305	221	H
			* 3.857848	55.87	PK-U	33.5	-45.4	0	43.97	-	-	74	-30.03	158	260	V
			* 3.862602	55.65	PK-U	33.5	-45.4	0	43.75	-	-	74	-30.25	158	137	H
	5580	6 + 5	* 3.867329	44.4	ADR	33.5	-45.5	0	32.4	54	-21.6	-	-	158	137	H
			* 3.890448	44.4	ADR	33.5	-45.1	0	32.8	54	-21.2	-	-	158	260	V
			* 1.272863	49.34	ADR	29.2	-48.8	0	29.74	54	-24.26	-	-	45	122	H
			* 1.273548	49.24	ADR	29.2	-48.7	0	29.74	54	-24.26	-	-	111	233	V
			* 1.273868	60.91	PK-U	29.2	-48.7	0	41.41	-	-	74	-32.59	111	233	V
			* 1.279383	60.63	PK-U	29.2	-48.8	0	41.03	-	-	74	-32.97	45	122	H
			* 2.810584	45.73	ADR	32.5	-46.9	0	31.33	54	-22.67	-	-	165	215	V
			* 2.815884	57.75	PK-U	32.5	-46.8	0	43.45	-	-	74	-30.55	165	215	V
			* 2.821618	45.81	ADR	32.5	-46.8	0	31.51	54	-22.49	-	-	173	162	H
			* 2.824398	57.63	PK-U	32.5	-46.9	0	43.23	-	-	74	-30.77	173	162	H
	5700	6 + 5	8.531752	53.78	PK-U	36	-42.2	0	47.58	-	-	68.2	-20.62	22	396	H
			8.536837	53.34	PK-U	36	-42.2	0	47.14	-	-	68.2	-21.06	78	288	V
			8.538597	41.97	ADR	36	-42.1	0	35.87	-	-	-	-	22	396	H
			8.548646	41.84	ADR	36	-42.2	0	35.64	-	-	-	-	78	288	V
			* 11.625415	40.88	ADR	38.3	-40.4	0	38.78	54	-15.22	-	-	225	167	H
			* 11.630767	52.69	PK-U	38.3	-40.4	0	50.59	-	-	74	-23.41	323	227	V
			* 11.635029	40.47	ADR	38.3	-40.1	0	38.67	54	-15.33	-	-	323	227	V
			* 11.654424	52.13	PK-U	38.4	-40.5	0	50.03	-	-	74	-23.97	225	167	H
			* 1.693253	48.52	ADR	28.9	-48.9	0	28.52	54	-25.48	-	-	205	212	V
			* 1.696119	60.22	PK-U	28.9	-48.8	0	40.32	-	-	74	-33.68	205	212	V
	5720	6 + 5	* 1.701663	60.3	PK-U	28.9	-48.9	0	40.3	-	-	74	-33.7	71	352	H
			* 1.70213	48.6	ADR	28.9	-48.9	0	28.6	54	-25.4	-	-	71	352	H
			* 4.500254	45.43	ADR	33.9	-46.3	0	33.03	54	-20.97	-	-	260	158	V
			* 4.508408	45.22	ADR	33.9	-45.9	0	33.22	54	-20.78	-	-	246	101	H
			* 4.511648	57.85	PK-U	33.9	-45.9	0	45.85	-	-	74	-28.15	246	101	H
			* 4.523887	56.97	PK-U	34	-45.9	0	45.07	-	-	74	-28.93	260	158	V
			* 11.587908	53.44	PK-U	38.3	-40.3	0	51.44	-	-	74	-22.56	181	245	H
			* 11.58957	40.64	ADR	38.3	-40.3	0	38.64	54	-15.36	-	-	181	245	H
			* 11.602201	52.49	PK-U	38.3	-40.4	0	50.39	-	-	74	-23.61	331	173	V
			* 11.604818	40.57	ADR	38.3	-40.5	0	38.37	54	-15.63	-	-	331	173	V
	5720	6 + 5	* 1.268225	49.32	ADR	29.1	-48.9	0	29.52	54	-24.48	-	-	142	345	H
			* 1.269481	61.06	PK-U	29.1	-48.8	0	41.36	-	-	74	-32.64	111	157	V
			* 1.271112	60.74	PK-U	29.1	-48.8	0	41.04	-	-	74	-32.96	142	345	H
			* 1.271988	49.13	ADR	29.1	-49	0	29.23	54	-24.77	-	-	111	157	V
			* 4.267927	57.52	PK-U	33.6	-46.3	0	44.82	-	-	74	-29.18	271	101	V
			* 4.272694	45.31	ADR	33.6	-46.4	0	32.51	54	-21.49	-	-	271	101	V
			* 4.275008	45.25	ADR	33.6	-46.3	0	32.55	54	-21.45	-	-	192	265	H
			* 4.278701	56.92	PK-U	33.6	-46.4	0	44.12	-	-	74	-29.88	192	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (52T/ Highest PSD)	5500 (Low Index)	6 + 5	* 9.334389	57.06	PK-U	36.4	-43.76	0	49.7	-	-	74	-24.3	44	293	H
			* 9.335738	45.7	ADR	36.4	-43.76	0	38.34	54	-15.66	-	-	44	293	H
			* 9.319599	57.71	PK-U	36.4	-43.74	0	50.37	-	-	74	-23.63	356	371	V
			* 9.31992	45.58	ADR	36.4	-43.75	0	38.23	54	-15.77	-	-	356	371	V
			1.991833	61.52	PK-U	31.4	-48.84	0	44.08	-	-	68.2	-24.12	101	112	H
			1.992401	50	ADR	31.4	-48.86	0	32.54	-	-	-	-	101	112	H
			1.994722	49.95	ADR	31.4	-48.96	0	32.39	-	-	-	-	139	167	V
			1.995996	61.59	PK-U	31.4	-49.03	0	43.96	-	-	68.2	-24.24	139	167	V
			3.050778	47.49	ADR	33	-47.23	0	33.26	-	-	-	-	309	260	V
			3.051118	47.4	ADR	33	-47.22	0	33.18	-	-	-	-	217	295	H
			3.05188	59.25	PK-U	33	-47.17	0	45.08	-	-	68.2	-23.12	309	260	V
			3.052242	59.39	PK-U	33	-47.17	0	45.22	-	-	68.2	-22.98	217	295	H
			* 4.037843	56.99	PK-U	33.2	-45.94	0	44.25	-	-	74	-29.75	344	135	H
			* 4.035613	45.31	ADR	33.2	-45.88	0	32.63	54	-21.37	-	-	344	135	H
			* 4.034002	57.23	PK-U	33.2	-45.92	0	44.51	-	-	74	-29.49	283	284	V
	5580 (Low Index)	6 + 5	* 4.03129	45.43	ADR	33.2	-45.96	0	32.67	54	-21.33	-	-	283	284	V
			* 11.85677	56.74	PK-U	38.6	-43.41	0	51.93	-	-	74	-22.07	24	384	H
			* 11.857196	45.26	ADR	38.6	-43.41	0	40.45	54	-13.55	-	-	24	384	H
			* 11.864676	56.78	PK-U	38.6	-43.38	0	52	-	-	74	-22	224	109	V
			* 11.86438	45.08	ADR	38.6	-43.4	0	40.28	54	-13.72	-	-	224	109	V
			2.095412	61.4	PK-U	31.7	-49.35	0	43.75	-	-	68.2	-24.45	173	207	V
			2.097949	61.63	PK-U	31.7	-49.27	0	44.06	-	-	68.2	-24.14	349	164	H
			2.098004	49.81	ADR	31.7	-49.27	0	32.24	-	-	-	-	173	207	V
			2.100454	49.92	ADR	31.7	-49.42	0	32.2	-	-	-	-	349	164	H
			* 10.724281	57.66	PK-U	37.7	-44.22	0	51.14	-	-	74	-22.86	43	132	H
	5700 (Mid Index)	6 + 5	* 10.723449	46.05	ADR	37.7	-44.21	0	39.54	54	-14.46	-	-	43	132	H
			* 10.723478	57.49	PK-U	37.7	-44.21	0	50.98	-	-	74	-23.02	317	192	V
			* 10.723839	46.07	ADR	37.7	-44.2	0	39.57	54	-14.43	-	-	317	192	V
			1.946578	61.67	PK-U	31.1	-49.13	0	43.64	-	-	68.2	-24.56	340	234	H
			1.946844	50.2	ADR	31.1	-49.13	0	32.17	-	-	-	-	340	234	H
			1.947606	50.18	ADR	31.1	-49.12	0	32.16	-	-	-	-	14	211	V
			1.949474	61.49	PK-U	31.1	-49.21	0	43.38	-	-	68.2	-24.82	14	211	V
			3.203517	58.83	PK-U	32.8	-46.88	0	44.75	-	-	68.2	-23.45	25	196	H
			3.203685	47.04	ADR	32.8	-46.88	0	32.96	-	-	-	-	25	196	H
			3.21088	57.75	PK-U	32.8	-46.77	0	43.78	-	-	68.2	-24.42	88	375	V
	5720 (High Index)	6 + 5	3.211931	46.64	ADR	32.8	-46.77	0	32.67	-	-	-	-	88	375	V
			1.944	61.67	PK-U	31.1	-49.25	0	43.52	-	-	68.2	-24.68	244	126	V
			1.944019	61.66	PK-U	31.1	-49.25	0	43.51	-	-	68.2	-24.69	227	309	H
			1.944558	50.16	ADR	31.1	-49.21	0	32.05	-	-	-	-	244	126	V
			1.94459	50.05	ADR	31.1	-49.21	0	31.94	-	-	-	-	227	309	H
			3.277314	57.18	PK-U	32.7	-46.65	0	43.23	-	-	68.2	-24.97	204	113	V
			3.27894	45.49	ADR	32.7	-46.69	0	31.5	-	-	-	-	204	113	V
			3.283532	45.62	ADR	32.7	-46.62	0	31.7	-	-	-	-	159	236	H
			3.285273	57.37	PK-U	32.7	-46.66	0	43.41	-	-	68.2	-24.79	159	236	H
			10.469675	46.2	ADR	37.5	-45.21	0	38.49	-	-	-	-	168	384	H
			10.470975	58.3	PK-U	37.5	-45.08	0	50.72	-	-	68.2	-17.48	168	384	H
			10.473439	46.23	ADR	37.5	-45.13	0	38.6	-	-	-	-	112	149	V
			10.475747	57.9	PK-U	37.5	-45.03	0	50.37	-	-	68.2	-17.83	112	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5510	6 + 5	* 1.239866	62.2	PK-U	28.5	-49.89	0	40.81	-	-	74	-33.19	0	101	H
			* 1.239347	50.5	ADR	28.5	-49.83	0	29.17	54	-24.83	-	-	0	101	H
			* 4.571414	58.35	PK-U	34.1	-47.76	0	44.69	-	-	74	-29.31	0	199	H
			* 4.571487	46.73	ADR	34.1	-47.75	0	33.08	54	-20.92	-	-	0	199	H
			* 1.289012	62.3	PK-U	28.5	-49.5	0	41.3	-	-	74	-32.7	0	101	V
			* 1.289002	50.35	ADR	28.5	-49.5	0	29.35	54	-24.65	-	-	0	101	V
			* 4.718418	58.21	PK-U	34.1	-48	0	44.31	-	-	74	-29.69	0	199	V
			* 4.720868	46.67	ADR	34.1	-48	0	32.77	54	-21.23	-	-	0	199	V
			17.012096	53.67	PK-U	41.9	-41.51	0	54.06	-	-	68.2	-14.14	0	199	V
			17.016157	53.82	PK-U	41.9	-41.5	0	54.22	-	-	68.2	-13.98	0	199	H
			* 1.239061	62.06	PK-U	28.5	-49.81	0	40.75	-	-	74	-33.25	0	200	H
			* 1.238043	50.53	ADR	28.5	-49.8	0	29.23	54	-24.77	-	-	0	200	H
	5550	6 + 5	* 4.809812	58.29	PK-U	34	-47.9	0	44.39	-	-	74	-29.61	0	101	H
			* 4.810844	46.73	ADR	34	-47.9	0	32.83	54	-21.17	-	-	0	101	H
			* 1.294041	62.44	PK-U	28.5	-49.6	0	41.34	-	-	74	-32.66	0	101	V
			* 1.293204	50.19	ADR	28.5	-49.52	0	29.17	54	-24.83	-	-	0	101	V
			* 4.852675	58.59	PK-U	34	-48	0	44.59	-	-	74	-29.41	0	200	V
			* 4.853913	46.91	ADR	34	-48	0	32.91	54	-21.09	-	-	0	200	V
			17.033721	53.77	PK-U	41.8	-41.7	0	53.87	-	-	68.2	-14.33	0	200	H
			17.079242	54.28	PK-U	41.8	-41.2	0	54.88	-	-	68.2	-13.32	0	200	V
			* 1.232659	61.9	PK-U	28.5	-49.8	0	40.6	-	-	74	-33.4	0	199	H
			* 1.234831	50.58	ADR	28.5	-49.8	0	29.28	54	-24.72	-	-	0	199	H
			* 4.674272	58.33	PK-U	34.1	-48.07	0	44.36	-	-	74	-29.64	0	199	H
			* 4.672333	46.74	ADR	34.1	-48.1	0	32.74	54	-21.26	-	-	0	199	H
	5670	6 + 5	* 1.23734	62.02	PK-U	28.5	-49.73	0	40.79	-	-	74	-33.21	0	199	V
			* 1.235644	50.56	ADR	28.5	-49.74	0	29.32	54	-24.68	-	-	0	199	V
			4.499965	57.98	PK-U	34	-47.7	0	44.28	-	-	68.2	-23.92	0	199	V
			16.541724	54.43	PK-U	41.4	-42	0	53.83	-	-	68.2	-14.37	0	199	V
			16.554923	54.72	PK-U	41.4	-42.1	0	54.02	-	-	68.2	-14.18	0	199	H
			* 1.233501	62.22	PK-U	28.5	-49.8	0	40.92	-	-	74	-33.08	0	101	H
			* 1.236113	50.53	ADR	28.5	-49.7	0	29.33	54	-24.67	-	-	0	101	H
			* 1.288501	62.47	PK-U	28.5	-49.5	0	41.47	-	-	74	-32.53	0	101	V
			* 1.289247	50.3	ADR	28.5	-49.5	0	29.3	54	-24.7	-	-	0	101	V
			* 4.326692	56.92	PK-U	33.6	-47.47	0	43.05	-	-	74	-30.95	0	101	V
			* 4.325219	45.68	ADR	33.6	-47.48	0	31.8	54	-22.2	-	-	0	101	V
			4.499919	58.11	PK-U	34	-47.7	0	44.41	-	-	68.2	-23.79	0	101	H
	5710 (Straddle)	6 + 5	17.052378	53.78	PK-U	41.8	-41.24	0	54.34	-	-	68.2	-13.86	0	200	V
			17.078778	53.58	PK-U	41.8	-41.2	0	54.18	-	-	68.2	-14.02	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (242T / Highest PSD)	5510 (Low Index)	6 + 5	1.988111	61.23	PK-U	31.4	-49.03	0	43.6	-	-	68.2	-24.6	54	228	H
			1.988349	49.89	ADR	31.4	-49.02	0	32.27	-	-	-	-	54	228	H
			1.992528	50.03	ADR	31.4	-48.86	0	32.57	-	-	-	-	334	274	V
			1.993063	61.89	PK-U	31.4	-48.88	0	44.41	-	-	68.2	-23.79	334	274	V
			3.143254	58.62	PK-U	32.9	-47.12	0	44.4	-	-	68.2	-23.8	98	191	V
			3.143369	47.08	ADR	32.9	-47.13	0	32.85	-	-	-	-	98	191	V
			3.14451	58.67	PK-U	32.9	-47.18	0	44.39	-	-	68.2	-23.81	151	208	H
			3.1447	46.97	ADR	32.9	-47.18	0	32.69	-	-	-	-	151	208	H
			8.96161	44.64	ADR	36.2	-42.77	0	38.07	-	-	-	-	61	112	H
			8.962566	56.88	PK-U	36.2	-42.75	0	50.33	-	-	68.2	-17.87	61	112	H
	5550 (Low Index)	6 + 5	8.966116	56.27	PK-U	36.2	-42.62	0	49.85	-	-	68.2	-18.35	140	332	V
			8.966591	44.65	ADR	36.2	-42.65	0	38.2	-	-	-	-	140	332	V
			3.648785	58.26	PK-U	33.6	-46.86	0	45	-	-	74	-29	360	101	V
			3.651559	57.93	PK-U	33.6	-46.64	0	44.89	-	-	74	-29.11	360	101	H
			3.659159	46.6	ADR	33.5	-47.1	0	33	54	-21	-	-	360	101	H
			3.659965	46.5	ADR	33.5	-47.15	0	32.85	54	-21.15	-	-	360	101	V
			10.07624	60.22	PK-U	37.4	-46.24	0	51.38	-	-	68.2	-16.82	360	101	V
			10.087603	59.96	PK-U	37.4	-46.28	0	51.08	-	-	68.2	-17.12	360	101	H
			10.088892	48.55	ADR	37.4	-46.17	0	39.78	-	-	-	-	360	101	H
			10.092964	48.38	ADR	37.4	-46.11	0	39.67	-	-	-	-	360	101	V
	5670 (High Index)	6 + 5	13.570502	47.55	ADR	38.9	-43.8	0	42.65	-	-	-	-	360	101	H
			13.583914	47.55	ADR	38.9	-43.88	0	42.57	-	-	-	-	360	101	V
			13.584768	59.36	PK-U	38.9	-44.02	0	54.24	-	-	68.2	-13.96	360	101	H
			13.596145	59.67	PK-U	38.8	-43.96	0	54.51	-	-	68.2	-13.69	360	101	V
			* 1.546035	57.97	PK-U	28	-46.21	0	39.76	-	-	74	-34.24	350	304	H
			* 1.547765	46.12	ADR	28	-46.2	0	27.92	54	-26.08	-	-	350	304	H
			* 3.814052	54.75	PK-U	33.3	-44.77	0	43.28	-	-	74	-30.72	33	275	H
			* 3.813233	42.89	ADR	33.3	-44.78	0	31.41	54	-22.59	-	-	33	275	H
			* 3.814308	40.45	PK-U	33.3	-44.77	0	28.98	-	-	74	-45.02	138	199	V
			* 3.812465	42.95	ADR	33.3	-44.8	0	31.45	54	-22.55	-	-	138	199	V
	5710 (High Index) (Straddle)	6 + 5	* 3.813499	54.58	PK-U	33.3	-44.78	0	43.1	-	-	74	-30.9	196	269	V
			* 3.814735	43.05	ADR	33.3	-44.76	0	31.59	54	-22.41	-	-	196	269	V
			* 11.542309	53.25	PK-U	38	-40.29	0	50.96	-	-	74	-23.04	28	376	H
			* 11.542732	41.37	ADR	38	-40.25	0	39.12	54	-14.88	-	-	28	376	H
			* 11.546092	52.4	PK-U	38	-40.12	0	50.28	-	-	74	-23.72	238	224	V
			* 11.546296	41.06	ADR	38	-40.12	0	38.94	54	-15.06	-	-	238	224	V
			* 1.356413	57.88	PK-U	28.6	-46.32	0	40.16	-	-	74	-33.84	202	244	H
			* 1.356569	46.37	ADR	28.6	-46.32	0	28.65	54	-25.35	-	-	202	244	H
			* 3.695272	54.7	PK-U	33.1	-44.69	0	43.11	-	-	74	-30.89	32	244	H
			* 3.696457	43.31	ADR	33.1	-44.68	0	31.73	54	-22.27	-	-	32	244	H
			* 1.355037	58.4	PK-U	28.6	-46.32	0	40.68	-	-	74	-33.32	148	199	V
			* 1.357822	46.45	ADR	28.6	-46.3	0	28.75	54	-25.25	-	-	148	199	V
			* 3.690086	54.85	PK-U	33.1	-44.79	0	43.16	-	-	74	-30.84	349	219	V
			* 3.688651	43.02	ADR	33.1	-44.81	0	31.31	54	-22.69	-	-	349	219	V
			* 11.495182	52.82	PK-U	38	-40.24	0	50.58	-	-	74	-23.42	123	353	H
			* 11.4964	40.95	ADR	38	-40.22	0	38.73	54	-15.27	-	-	123	353	H
			* 11.495844	52.56	PK-U	38	-40.22	0	50.34	-	-	74	-23.66	4	373	V
			* 11.49714	41.14	ADR	38	-40.22	0	38.92	54	-15.08	-	-	4	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be ((106+26)T/ Highest PSD)	5510 (Low Index)	6 + 5	* 2.212992	61.06	PK-U	31.8	-50.3	0	42.56	-	-	74	-31.44	360	101	H
			* 2.273125	49.4	ADR	31.8	-50.3	0	30.9	54	-23.1	-	-	360	101	H
			* 2.275817	60.88	PK-U	31.8	-50.31	0	42.37	-	-	74	-31.63	360	199	V
			* 2.271543	49.31	ADR	31.8	-50.3	0	30.81	54	-23.19	-	-	360	199	V
			* 8.302304	56.09	PK-U	36	-45.7	0	46.39	-	-	74	-27.61	360	101	H
			* 8.286936	44.14	ADR	36	-45.74	0	34.4	54	-19.6	-	-	360	101	H
			* 15.617553	53.64	PK-U	41.1	-41.84	0	52.9	-	-	74	-21.1	360	199	H
			* 15.596157	41.65	ADR	41.1	-41.48	0	41.27	54	-12.73	-	-	360	199	H
			* 8.292819	56.48	PK-U	36	-45.69	0	46.79	-	-	74	-27.21	360	199	V
			* 8.284717	44.04	ADR	36	-45.77	0	34.27	54	-19.73	-	-	360	199	V
			* 15.635648	53.39	PK-U	41.2	-41.92	0	52.67	-	-	74	-21.33	360	199	V
			* 15.632004	41.65	ADR	41.2	-41.95	0	40.9	54	-13.1	-	-	360	199	V
	5550 (Mid Index)	6 + 5	1.896914	61.59	PK-U	31.3	-50.28	0	42.61	-	-	68.2	-25.59	242	301	H
			1.895447	50.17	ADR	31.3	-50.28	0	31.19	-	-	-	-	242	301	H
			3.6449	58.37	PK-U	33.3	-47.65	0	44.02	-	-	74	-29.98	159	399	H
			3.642926	46.36	ADR	33.3	-47.69	0	31.97	54	-22.03	-	-	159	399	H
			1.899051	61.93	PK-U	31.3	-50.27	0	42.96	-	-	68.2	-25.24	94	249	V
			1.895945	50.31	ADR	31.3	-50.29	0	31.32	-	-	-	-	94	249	V
			3.644065	57.81	PK-U	33.3	-47.69	0	43.42	-	-	74	-30.58	138	237	V
			3.647145	46.44	ADR	33.3	-47.66	0	32.08	54	-21.92	-	-	138	237	V
			11.773181	55.51	PK-U	38.7	-44.2	0	50.01	-	-	74	-23.99	138	199	H
			11.793435	43.8	ADR	38.7	-44.14	0	38.36	54	-15.64	-	-	138	199	H
			11.801047	55.84	PK-U	38.7	-44.11	0	50.43	-	-	74	-23.57	138	199	V
			11.789972	44.02	ADR	38.7	-44.16	0	38.56	54	-15.44	-	-	138	199	V
	5670 (High Index)	6 + 5	1.94252	62.2	PK-U	31.5	-50.22	0	43.48	-	-	68.2	-24.72	315	145	H
			1.940613	50.36	ADR	31.5	-50.27	0	31.59	-	-	-	-	315	145	H
			3.54816	57.98	PK-U	33.2	-47.53	0	43.65	-	-	74	-30.35	205	130	H
			3.539693	45.87	ADR	33.2	-47.53	0	31.54	54	-22.46	-	-	205	130	H
			1.939171	62	PK-U	31.5	-50.28	0	43.22	-	-	68.2	-24.98	32	152	V
			1.940897	50.34	ADR	31.5	-50.27	0	31.57	-	-	-	-	32	152	V
			3.539755	57.82	PK-U	33.2	-47.53	0	43.49	-	-	74	-30.51	235	266	V
			3.569362	45.86	ADR	33.2	-47.65	0	31.41	54	-22.59	-	-	235	266	V
			11.423969	55.82	PK-U	38	-44.91	0	48.91	-	-	74	-25.09	235	101	H
			11.393889	43.4	ADR	38	-44.96	0	36.44	54	-17.56	-	-	235	101	H
			11.39131	55.15	PK-U	38	-44.9	0	48.25	-	-	74	-25.75	235	200	V
			11.398795	43.54	ADR	38	-44.91	0	36.63	54	-17.37	-	-	235	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMOCDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5530	6 + 5	* 2.848285	60.55	PK-U	32.5	0	-48.7	44.35	-	-	74	-29.65	102	334	H
			* 2.846932	47.88	ADR	32.5	0	-48.71	31.67	54	-22.33	-	-	102	334	H
			* 2.844842	59.95	PK-U	32.5	0	-48.7	43.75	-	-	74	-30.25	23	231	V
			* 2.845443	47.88	ADR	32.5	0	-48.74	31.64	54	-22.36	-	-	23	231	V
			* 11.065896	55.77	PK-U	37.9	0	-44.8	48.87	-	-	74	-25.13	80	305	H
			* 11.065138	44.18	ADR	37.9	0	-44.8	37.28	54	-16.72	-	-	80	305	H
			* 11.061664	55.56	PK-U	37.9	0	-44.73	48.73	-	-	74	-25.27	350	238	V
			* 11.063042	43.91	ADR	37.9	0	-44.7	37.11	54	-16.89	-	-	350	238	V
			16.587778	53.82	PK-U	41.5	0	-42	53.32	-	-	68.2	-14.88	250	343	V
			16.589307	54.16	PK-U	41.5	0	-41.93	53.73	-	-	68.2	-14.47	135	235	H
	5610	6 + 5	* 1.290646	62.11	PK-U	28.5	0	-49.56	41.05	-	-	74	-32.95	360	199	H
			* 1.290602	50.32	ADR	28.5	0	-49.56	29.26	54	-24.74	-	-	360	199	H
			* 4.618365	58.38	PK-U	34.1	0	-47.8	44.68	-	-	74	-29.32	360	101	H
			* 4.620128	46.43	ADR	34.1	0	-47.8	32.73	54	-21.27	-	-	360	101	H
			* 1.182156	62.36	PK-U	28.1	0	-49.9	40.56	-	-	74	-33.44	360	101	V
			* 1.181931	50.52	ADR	28.1	0	-49.89	28.73	54	-25.27	-	-	360	101	V
			* 4.57313	58.36	PK-U	34.1	0	-47.79	44.67	-	-	74	-29.33	360	199	V
			* 4.575416	46.5	ADR	34.1	0	-47.8	32.8	54	-21.2	-	-	360	199	V
			16.523403	54.95	PK-U	41.4	0	-42.1	54.25	-	-	68.2	-13.95	360	199	H
			16.534071	54.5	PK-U	41.4	0	-41.91	53.99	-	-	68.2	-14.21	360	199	V
	5690 (Straddle)	6 + 5	* 1.240333	62.13	PK-U	28.5	0	-49.87	40.76	-	-	74	-33.24	360	101	H
			* 1.241991	50.51	ADR	28.5	0	-49.7	29.31	54	-24.69	-	-	360	101	H
			* 4.251715	57.79	PK-U	33.5	0	-47.2	44.09	-	-	74	-29.91	360	199	H
			* 4.252807	45.94	ADR	33.5	0	-47.2	32.24	54	-21.76	-	-	360	199	H
			* 1.231671	62.01	PK-U	28.5	0	-49.8	40.71	-	-	74	-33.29	360	199	V
			* 1.232765	50.09	ADR	28.5	0	-49.8	28.79	54	-25.21	-	-	360	199	V
			* 4.563428	58.52	PK-U	34.1	0	-47.8	44.82	-	-	74	-29.18	360	199	V
			* 4.564879	46.58	ADR	34.1	0	-47.89	32.79	54	-21.21	-	-	360	199	V
			17.61223	52.77	PK-U	41.9	0	-40.2	54.47	-	-	68.2	-13.73	360	199	H
			17.614467	52.72	PK-U	41.9	0	-40.25	54.37	-	-	68.2	-13.83	360	199	V
11be (484T / Highest PSD)	5530 (Low Index)	6 + 5	* 2.28206	61.13	PK-U	31.8	0	-50.29	42.64	-	-	74	-31.36	1	101	H
			* 2.269987	49.47	ADR	31.8	0	-50.29	30.98	54	-23.02	-	-	1	101	H
			* 2.266993	61.16	PK-U	31.7	0	-50.29	42.57	-	-	74	-31.43	1	101	V
			* 2.2859	49.47	ADR	31.8	0	-50.25	31.02	54	-22.98	-	-	1	101	V
			* 8.229381	55.72	PK-U	36.1	0	-45.74	46.08	-	-	74	-27.92	1	101	H
			* 8.249603	44.14	ADR	36.1	0	-45.8	34.44	54	-19.56	-	-	1	101	H
			* 15.719492	53.96	PK-U	41.2	0	-42.2	52.96	-	-	74	-21.04	1	101	H
			* 15.740354	41.98	ADR	41.2	0	-42.21	40.97	54	-13.03	-	-	1	101	H
			* 8.229608	55.88	PK-U	36.1	0	-45.74	46.24	-	-	74	-27.76	1	101	V
			* 8.257234	44.13	ADR	36	0	-45.79	34.34	54	-19.66	-	-	1	101	V
	5610 (Low Index)	6 + 5	* 15.772132	53.89	PK-U	41.2	0	-42.2	52.89	-	-	74	-21.11	1	101	V
			* 15.760568	42.13	ADR	41.2	0	-42.15	41.18	54	-12.82	-	-	1	101	V
			* 1.497085	60.58	PK-U	27.9	0	-49.23	39.25	-	-	74	-34.75	0	101	H
			* 1.496658	48.78	ADR	27.9	0	-49.24	27.44	54	-26.56	-	-	0	101	H
			* 1.498118	60.18	PK-U	27.9	0	-49.25	38.83	-	-	74	-35.17	0	101	V
			* 1.498131	48.83	ADR	27.9	0	-49.25	27.48	54	-26.52	-	-	0	101	V
			* 7.46482	57.24	PK-U	35.6	0	-46.86	45.98	-	-	74	-28.02	0	101	H
			* 7.46602	45.22	ADR	35.6	0	-46.84	33.98	54	-20.02	-	-	0	101	H
			* 15.724051	53.54	PK-U	41.2	0	-42.2	52.54	-	-	74	-21.46	0	101	H
			* 15.708838	42.13	ADR	41.2	0	-42.22	41.11	54	-12.89	-	-	0	101	H
	5690 (Straddle) (High Index)	6 + 5	* 7.400378	56.92	PK-U	35.6	0	-46.68	45.84	-	-	74	-28.16	0	101	V
			* 7.405702	45.12	ADR	35.6	0	-46.75	33.97	54	-20.03	-	-	0	101	V
			* 15.737589	53.65	PK-U	41.2	0	-42.18	52.67	-	-	74	-21.33	0	101	V
			* 15.744536	42.12	ADR	41.2	0	-42.2	41.12	54	-12.88	-	-	0	101	V
			1.938359	61.21	PK-U	31	0	-49.13	43.08	-	-	68.2	-25.12	46	327	H
			1.940878	49.93	ADR	31.1	0	-49.15	31.88	-	-	-	-	46	327	H
			1.941147	49.9	ADR	31.1	0	-49.16	31.84	-	-	-	-	47	244	V
			1.942684	61.85	PK-U	31.1	0	-49.27	43.68	-	-	68.2	-24.52	47	244	V
			3.204148	58.24	PK-U	32.8	0	-46.88	44.16	-	-	68.2	-24.04	314	342	V
			3.205034	46.29	ADR	32.8	0	-46.91	32.18	-	-	-	-	314	342	V
			3.210739	46.13	ADR	32.8	0	-46.78	32.15	-	-	-	-	85	231	H
			3.212477	57.73	PK-U	32.8	0	-46.76	43.77	-	-	68.2	-24.43	85	231	H
			12.930191	57.2	PK-U	39.1	0	-43.22	53.08	-	-	68.2	-15.12	39	105	H
			12.93183	44.82	ADR	39.1	0	-43.19	40.73	-	-	-	-	39	105	H
			12.936907	45.13	ADR	39.1	0	-43.08	41.15	-	-	-	-	139	337	V
			12.937576	57.22	PK-U	39.1	0	-43.09	53.23	-	-	68.2	-14.97	139	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

UNII-2C (MIMO/CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (52T / Highest PSD)	5530 (Low Index)	6 + 5	* 2.338447	60.51	PK-U	32.1	-49.98	0	42.63	-	-	74	-31.37	1	101	H
			* 2.33726	48.87	ADR	32.1	-49.98	0.17	31.16	54	-22.84	-	-	1	101	H
			* 2.339257	60.56	PK-U	32.1	-49.96	0	42.7	-	-	74	-31.3	1	101	V
			* 2.351204	48.92	ADR	32.2	-49.95	0.17	31.34	54	-22.66	-	-	1	101	V
			* 8.310086	56.03	PK-U	36	-45.55	0	46.48	-	-	74	-27.52	1	101	H
			* 8.299592	44.2	ADR	36	-45.72	0.17	34.65	54	-19.35	-	-	1	101	H
			* 15.877647	53.75	PK-U	41.2	-41.52	0	53.43	-	-	74	-20.57	1	101	H
			* 15.8851	42.01	ADR	41.2	-41.44	0.17	41.94	54	-12.06	-	-	1	101	H
			* 8.299667	55.73	PK-U	36	-45.72	0	46.01	-	-	74	-27.99	1	101	V
			* 8.281956	44.26	ADR	36	-45.8	0.17	34.63	54	-19.37	-	-	1	101	V
			* 15.843197	53.52	PK-U	41.2	-42.13	0	52.59	-	-	74	-21.41	1	101	V
			* 15.84769	42.21	ADR	41.2	-42.07	0.17	41.51	54	-12.49	-	-	1	101	V
	5610 (Mid Index)	6 + 5	* 2.335422	61.46	PK-U	32.1	-49.97	0	43.59	-	-	74	-30.41	0	101	H
			* 2.326915	49.25	ADR	32.1	-49.94	0.17	31.58	54	-22.42	-	-	0	101	H
			* 2.319508	67.74	PK-U	32	-49.94	0	49.8	-	-	74	-24.2	0	101	V
			* 2.336055	49.03	ADR	32.1	-49.98	0.17	31.32	54	-22.68	-	-	0	101	V
			8.658867	56.14	PK-U	36	-45.23	0	46.91	-	-	68.2	-21.29	0	101	H
			8.680996	44.09	ADR	36	-45.25	0.17	35.01	-	-	-	-	0	101	H
			* 15.587484	54.02	PK-U	41.1	-41.55	0	53.57	-	-	74	-20.43	0	101	H
			* 15.587733	41.91	ADR	41.1	-41.56	0.17	41.62	54	-12.38	-	-	0	101	H
			* 8.312397	55.77	PK-U	36	-45.59	0	46.18	-	-	74	-27.82	0	101	V
			* 8.302472	44.17	ADR	36	-45.69	0.17	34.65	54	-19.35	-	-	0	101	V
			* 15.702919	53.69	PK-U	41.2	-42.17	0	52.72	-	-	74	-21.28	0	101	V
			* 15.713466	42.32	ADR	41.2	-42.23	0.17	41.46	54	-12.54	-	-	0	101	V
	5690 (Straddle) (High Index)	6 + 5	1.938575	61.61	PK-U	31	-49.12	0	43.49	-	-	68.2	-24.71	24	358	V
			1.94007	49.73	ADR	31.1	-49.15	0.17	31.85	-	-	-	-	24	358	V
			1.94448	61.91	PK-U	31.1	-49.22	0	43.79	-	-	68.2	-24.41	352	399	H
			1.945661	50.11	ADR	31.1	-49.14	0.17	32.24	-	-	-	-	352	399	H
			3.038465	59.07	PK-U	33	-47.6	0	44.47	-	-	68.2	-23.73	87	198	H
			3.038949	47.38	ADR	33	-47.57	0.17	32.98	-	-	-	-	87	198	H
			3.045583	47.25	ADR	33	-47.51	0.17	32.91	-	-	-	-	182	245	V
			3.045646	59.1	PK-U	33	-47.5	0	44.6	-	-	68.2	-23.6	182	245	V
			9.286683	45.05	ADR	36.4	-43.36	0.17	38.26	-	-	-	-	173	262	H
			9.286889	57.02	PK-U	36.4	-43.38	0	50.04	-	-	68.2	-18.16	173	262	H
			9.298369	57.02	PK-U	36.4	-43.66	0	49.76	-	-	68.2	-18.44	94	270	V
			9.29901	45.03	ADR	36.4	-43.62	0.17	37.98	-	-	-	-	94	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be SU Mode / Highest Power)	5570	6 + 5	* 1.286625	62.31	PK-U	28.5	0	-49.54	41.27	-	-	74	-32.73	2	199	H
			* 1.286674	50.12	ADR	28.5	0	-49.53	29.09	54	-24.91	-	-	2	199	H
			* 4.559563	58.53	PK-U	34.1	0	-47.84	44.79	-	-	74	-29.21	2	199	H
			* 4.560973	46.62	ADR	34.1	0	-47.8	32.92	54	-21.08	-	-	2	199	H
			* 1.346015	61.89	PK-U	28.5	0	-49.6	40.79	-	-	74	-33.21	2	199	V
			* 1.345782	50.1	ADR	28.5	0	-49.6	29	54	-25	-	-	2	199	V
			* 4.613376	58.31	PK-U	34.1	0	-47.9	44.51	-	-	74	-29.49	2	101	V
			* 4.6137	46.42	ADR	34.1	0	-47.9	32.62	54	-21.38	-	-	2	101	V
			* 16.14485	54.42	PK-U	40.9	0	-42.42	52.9	-	-	74	-21.1	2	200	V
			* 16.143249	42.71	ADR	40.9	0	-42.5	41.11	54	-12.89	-	-	2	200	V
			16.536956	55.33	PK-U	41.4	0	-42	54.73	-	-	68.2	-13.47	2	200	H
11be (242T / Highest PSD)	5570 (Mid Index)	6 + 5	2.00519	61.31	PK-U	32.1	0	-49.76	43.65	-	-	68.2	-24.55	165	241	H
			2.001696	49.81	ADR	32.1	0.1	-49.78	32.23	-	-	-	-	165	241	H
			3.697625	57.85	PK-U	33.2	0	-47.46	43.59	-	-	74	-30.41	201	284	H
			3.697798	45.94	ADR	33.2	0.1	-47.46	31.78	54	-22.22	-	-	201	284	H
			1.994229	61.1	PK-U	32	0	-49.81	43.29	-	-	68.2	-24.91	240	181	V
			1.999596	49.88	ADR	32.1	0.1	-49.8	32.28	-	-	-	-	240	181	V
			3.699494	57.71	PK-U	33.2	0	-47.46	43.45	-	-	74	-30.55	166	304	V
			3.698947	45.8	ADR	33.2	0.1	-47.47	31.63	54	-22.37	-	-	166	304	V
			11.627663	55.25	PK-U	38.4	0	-44.18	49.47	-	-	74	-24.53	166	200	H
			11.647175	43.72	ADR	38.5	0.1	-44.12	38.2	54	-15.8	-	-	166	200	H
			11.631597	55.99	PK-U	38.4	0	-44.13	50.26	-	-	74	-23.74	166	200	V
11be (52T / Highest PSD)	5570 (Mid Index)	6 + 5	11.659886	43.62	ADR	38.5	0.1	-44.34	37.88	54	-16.12	-	-	166	200	V
			1.891768	61.2	PK-U	30.8	0	-49.21	42.79	-	-	68.2	-25.41	291	265	V
			1.893345	49.8	ADR	30.8	0.2	-49.17	31.63	-	-	-	-	291	265	V
			1.89417	49.79	ADR	30.8	0.2	-49.16	31.63	-	-	-	-	303	340	H
			1.895337	61.4	PK-U	30.8	0	-49.18	43.02	-	-	68.2	-25.18	303	340	H
			3.223871	46.1	ADR	32.8	0.2	-46.63	32.47	-	-	-	-	185	126	V
			3.225463	57.75	PK-U	32.8	0	-46.55	44	-	-	68.2	-24.2	185	126	V
			3.226336	57.37	PK-U	32.8	0	-46.55	43.62	-	-	68.2	-24.58	133	358	H
			3.226538	45.73	ADR	32.8	0.2	-46.54	32.19	-	-	-	-	133	358	H
			9.637875	58.27	PK-U	36.7	0	-45.36	49.61	-	-	68.2	-18.59	96	289	V
			9.638547	57.86	PK-U	36.7	0	-45.36	49.2	-	-	68.2	-19	351	143	H
			9.639035	46.49	ADR	36.7	0.2	-45.36	38.03	-	-	-	-	351	143	H
			9.639475	46.58	ADR	36.7	0.2	-45.31	38.17	-	-	-	-	96	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5500MHz)

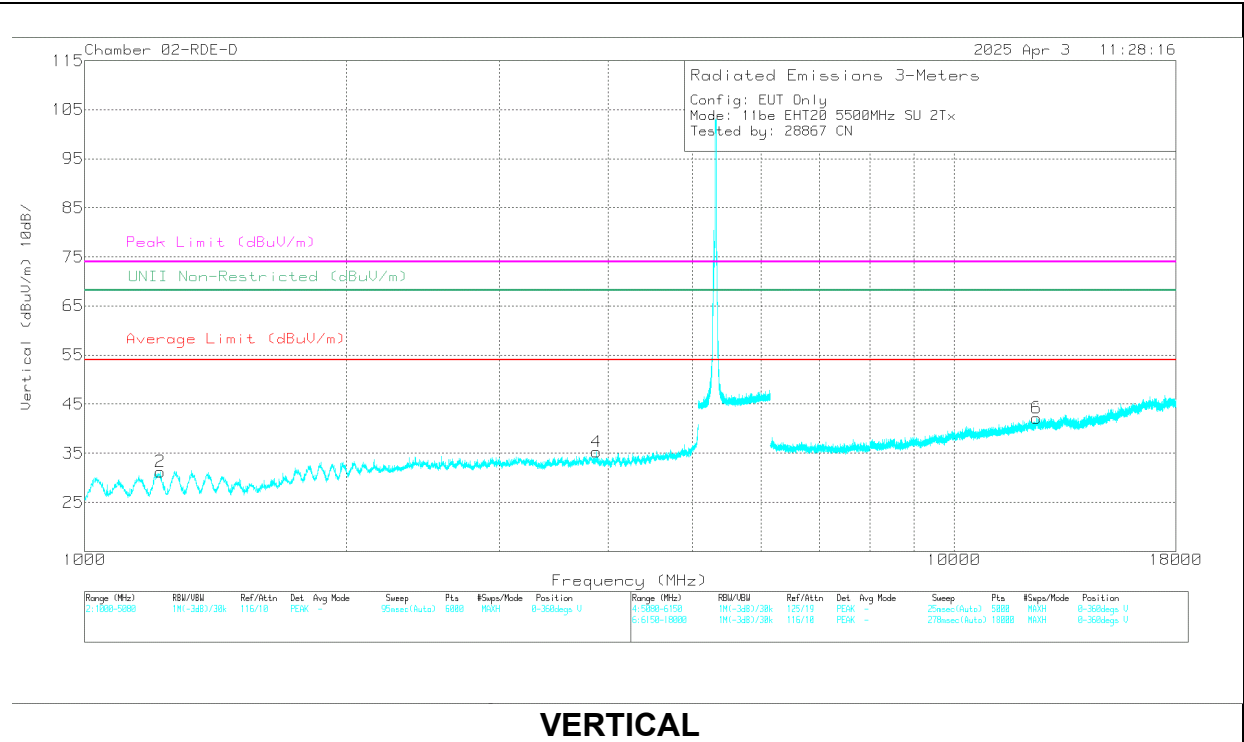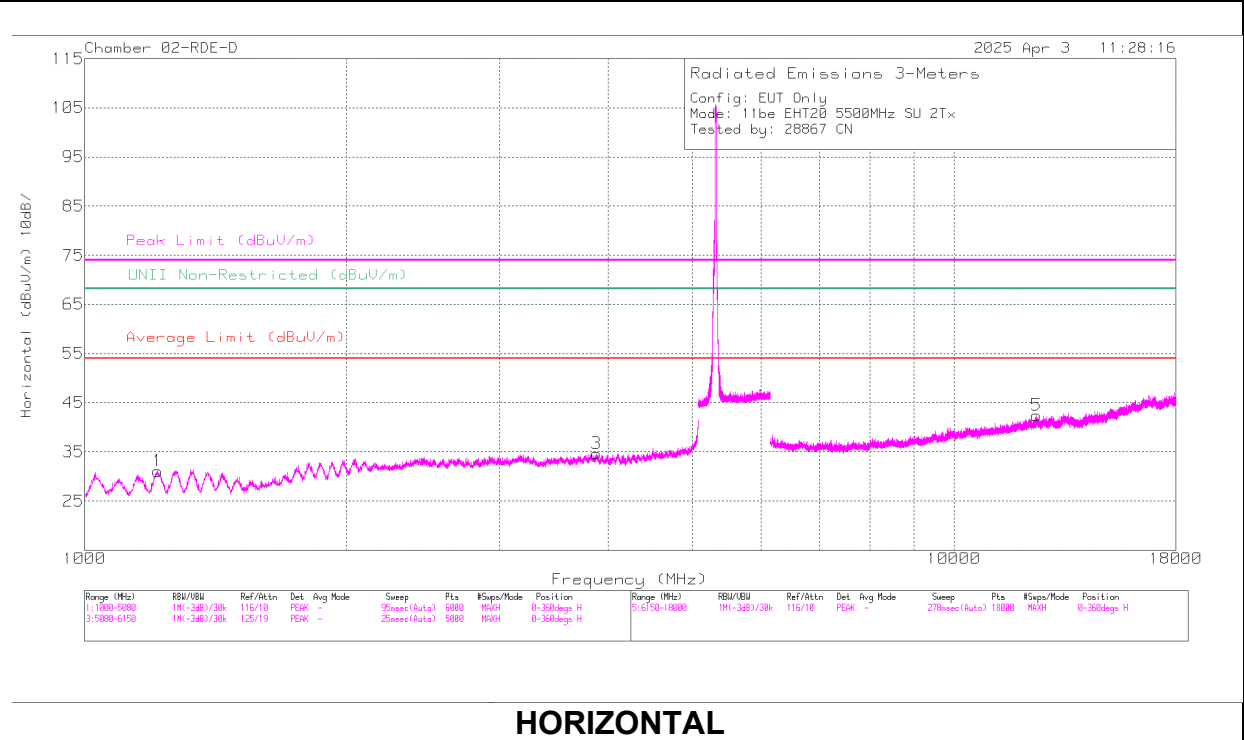

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.20507	60.61	PK-U	28.7	-48.8	0	40.51	-	-	74	-33.49	217	226	H
1	* 1.213203	49.6	ADR	28.8	-48.8	0	29.6	54	-24.4	-	-	217	226	H
2	* 1.213687	60.43	PK-U	28.8	-48.8	0	40.43	-	-	74	-33.57	178	116	V
2	* 1.214727	49.34	ADR	28.8	-48.8	0	29.34	54	-24.66	-	-	178	116	V
6	* 12.435465	40.48	ADR	39	-39.4	0	40.08	54	-13.92	-	-	65	244	V
6	* 12.458273	51.84	PK-U	39	-39.5	0	51.34	-	-	74	-22.66	65	244	V
5	* 12.459169	40.42	ADR	39	-39.4	0	40.02	54	-13.98	-	-	305	221	H
5	* 12.468067	52.12	PK-U	39	-39.5	0	51.62	-	-	74	-22.38	305	221	H
4	* 3.857848	55.87	PK-U	33.5	-45.4	0	43.97	-	-	74	-30.03	158	260	V
3	* 3.862602	55.65	PK-U	33.5	-45.4	0	43.75	-	-	74	-30.25	158	137	H
3	* 3.867329	44.4	ADR	33.5	-45.5	0	32.4	54	-21.6	-	-	158	137	H
4	* 3.890448	44.4	ADR	33.5	-45.1	0	32.8	54	-21.2	-	-	158	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


1.1.25. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5745	6	5.725	-22.56	Pk	34.9	-34.4	11.8	0	-10.26	27	-37.26	155	141	H	
			5.641634	-49.01	Pk	34.7	-34.4	11.8	0	-36.91	-27	-9.91	155	141	H	
			5.725	-21.92	Pk	34.9	-34.4	11.8	0	-9.62	27	-36.62	70	128	V	
			5.631767	-48.74	Pk	34.7	-34.7	11.8	0	-36.94	-27	-9.94	70	128	V	
			5.85	-35.27	Pk	35.2	-34.2	11.8	0	-22.47	27	-49.47	146	104	H	
			5.98275	-52.7	Pk	35.6	-34.1	11.8	0	-39.4	-27	-12.4	146	104	H	
	5825		5.85	-35.43	Pk	35.2	-34.2	11.8	0	-22.63	27	-49.63	59	274	V	
			5.9958	-52.33	Pk	35.6	-34.1	11.8	0	-39.03	-27	-12.03	59	274	V	
		5745	5	5.625833	-47.68	Pk	35.2	-37.55	11.8	0	-38.23	-27	-11.23	236	140	H
				5.725	-23.69	Pk	35	-37.21	11.8	0	-14.1	27	-41.1	236	140	H
				5.649634	-47.72	Pk	35.1	-37.48	11.8	0	-38.3	-27	-11.3	125	131	V
				5.725	-20.8	Pk	35	-37.21	11.8	0	-11.21	27	-38.21	125	131	V
	5.85			-35.14	Pk	35.1	-36.78	11.8	0	-25.02	27	-52.02	234	207	H	
	5.95365			-48.7	Pk	35.3	-36.38	11.8	0	-37.98	-27	-10.98	234	207	H	
5825	5.85	-27.71		Pk	35.1	-36.78	11.8	0	-17.59	27	-44.59	129	115	V		
	5.972425	-48.33		Pk	35.3	-36.34	11.8	0	-37.57	-27	-10.57	129	115	V		
	HT40	5755	6	5.631583	-47.32	Pk	35.2	-37.56	11.8	0	-37.88	-27	-10.88	20	141	H
				5.725	-26.83	Pk	35	-37.21	11.8	0	-17.24	27	-44.24	20	141	H
				5.64075	-47.06	Pk	35.1	-37.48	11.8	0	-37.64	-27	-10.64	20	141	V
				5.725	-19.11	Pk	35	-37.21	11.8	0	-9.52	27	-36.52	20	141	V
5.85				-41.85	Pk	35.1	-36.78	11.8	0	-31.73	27	-58.73	356	321	H	
5.989875				-48.58	Pk	35.3	-36.31	11.8	0	-37.79	-27	-10.79	356	321	H	
5795		5.85		-43.14	Pk	35.1	-36.78	11.8	0	-33.02	27	-60.02	356	321	V	
		5.9702		-48.2	Pk	35.3	-36.35	11.8	0	-37.45	-27	-10.45	356	321	V	
		5755	5	5.64964	-65.96	Pk	34.4	-17.4	11.8	0	-37.16	-27	-10.16	228	163	H
				5.725	-44.01	Pk	34.5	-17.4	11.8	0	-15.11	27	-42.11	228	163	H
				5.647971	-66.54	Pk	34.3	-17.5	11.8	0	-37.94	-27	-10.94	143	103	V
				5.725	-43.68	Pk	34.5	-17.4	11.8	0	-14.78	27	-41.78	143	103	V
5.85				-65.13	Pk	34.9	-16.4	11.8	0	-34.83	27	-61.83	231	172	H	
5.983042				-66.4	Pk	35.2	-16.4	11.8	0	-35.8	-27	-8.8	231	172	H	
5795	5.85	-60.84		Pk	34.9	-16.4	11.8	0	-30.54	27	-57.54	123	128	V		
	5.989259	-66.38		Pk	35.2	-16.4	11.8	0	-35.78	-27	-8.78	123	128	V		
	VHT80	5775 (Lower)	6	5.6473	-48.14	Pk	34.8	-36.59	11.8	0	-38.13	-27	-11.13	63	104	H
				5.725	-31.31	Pk	34.9	-36.29	11.8	0	-20.9	27	-47.9	63	104	H
				5.6275	-44.45	Pk	34.8	-36.58	11.8	0	-34.43	-27	-7.43	355	101	V
				5.725	-25.31	Pk	34.9	-36.29	11.8	0	-14.9	27	-41.9	355	101	V
5.85				-42.16	Pk	35.1	-35.92	11.8	0	-31.18	27	-58.18	60	398	H	
5.930525				-48.39	Pk	35.2	-35.87	11.8	0	-37.26	-27	-10.26	60	398	H	
5775 (Upper)		5.85		-30.95	Pk	35.1	-35.92	11.8	0	-19.97	27	-46.97	324	105	V	
		5.94295		-48.11	Pk	35.2	-35.83	11.8	0	-36.94	-27	-9.94	324	105	V	
		5775 (Lower)	5	5.65159	-42.76	Pk	34.7	-34.3	11.8	0	-30.56	-25.82	-4.74	73	150	H
				5.725	-27.21	Pk	34.8	-34.1	11.8	0	-14.71	27	-41.71	73	150	H
				5.650165	-47.36	Pk	34.7	-34.3	11.8	0	-35.16	-26.88	-8.28	30	144	V
				5.725	-30.78	Pk	34.8	-34.1	11.8	0	-18.28	27	-45.28	30	144	V
5.85				-34.73	Pk	35	-33.9	11.8	0	-21.83	27	-48.83	71	109	H	
5.930188				-51.08	Pk	35.2	-33.8	11.8	0	-37.88	-27	-10.88	71	109	H	
5775 (Upper)	5.85	-38.61		Pk	35	-33.9	11.8	0	-25.71	27	-52.71	104	276	V		
	5.929203	-53		Pk	35.2	-33.8	11.8	0	-39.8	-27	-12.8	104	276	V		

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

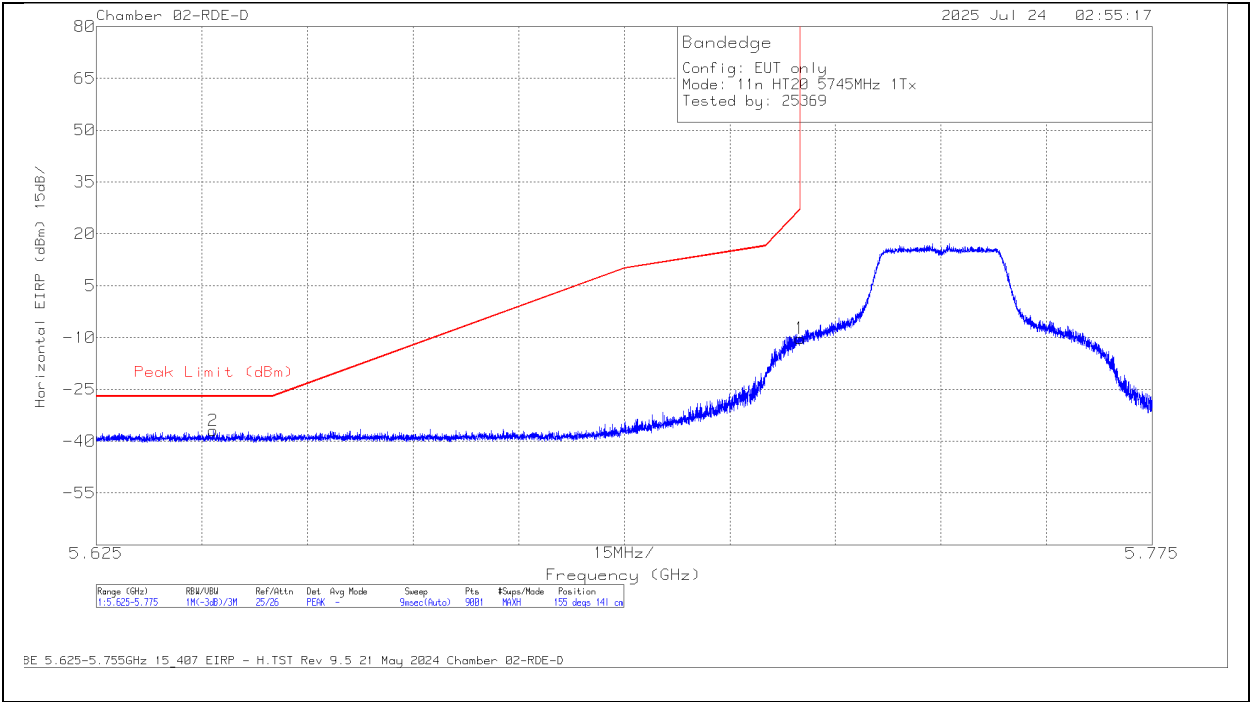


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-22.56	Pk	34.9	11.8	-34.4	0	-10.26	27	-37.26	155	141	H
2	5.641634	-49.01	Pk	34.7	11.8	-34.4	0	-36.91	-27	-9.91	155	141	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

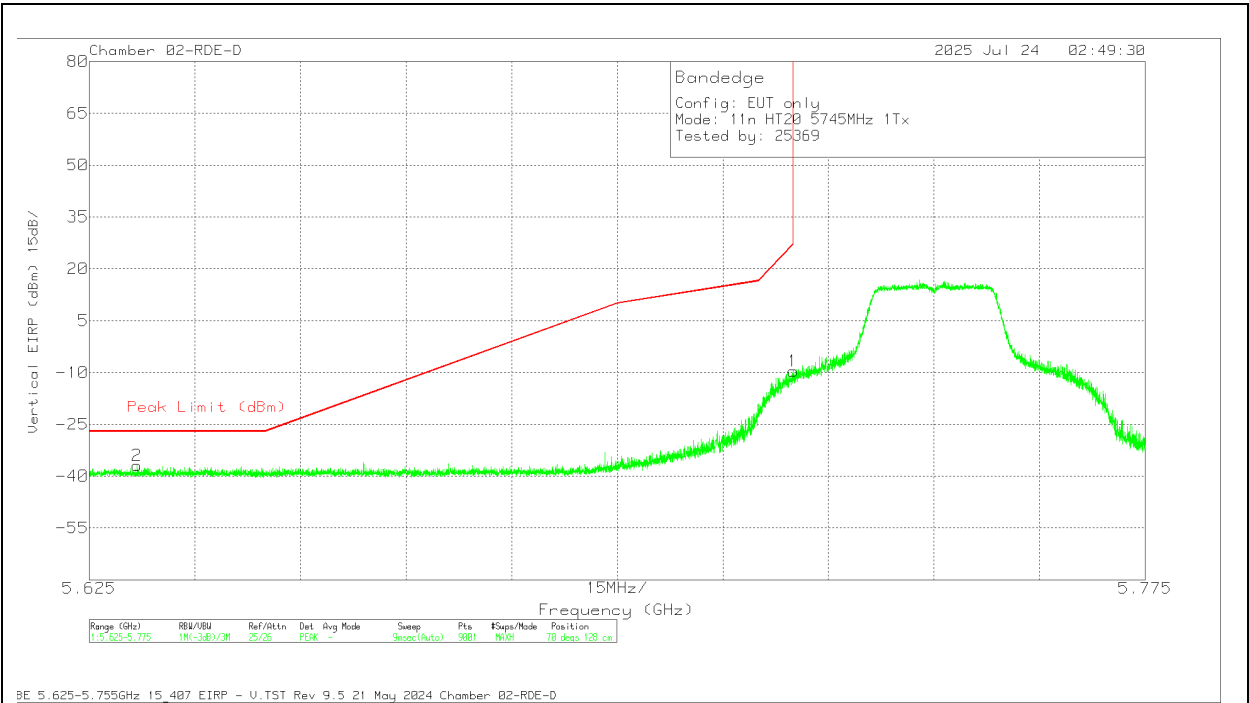


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-21.92	Pk	34.9	11.8	-34.4	0	-9.62	27	-36.62	70	128	V
2	5.631767	-48.74	Pk	34.7	11.8	-34.7	0	-36.94	-27	-9.94	70	128	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHZ)

HORIZONTAL RESULT

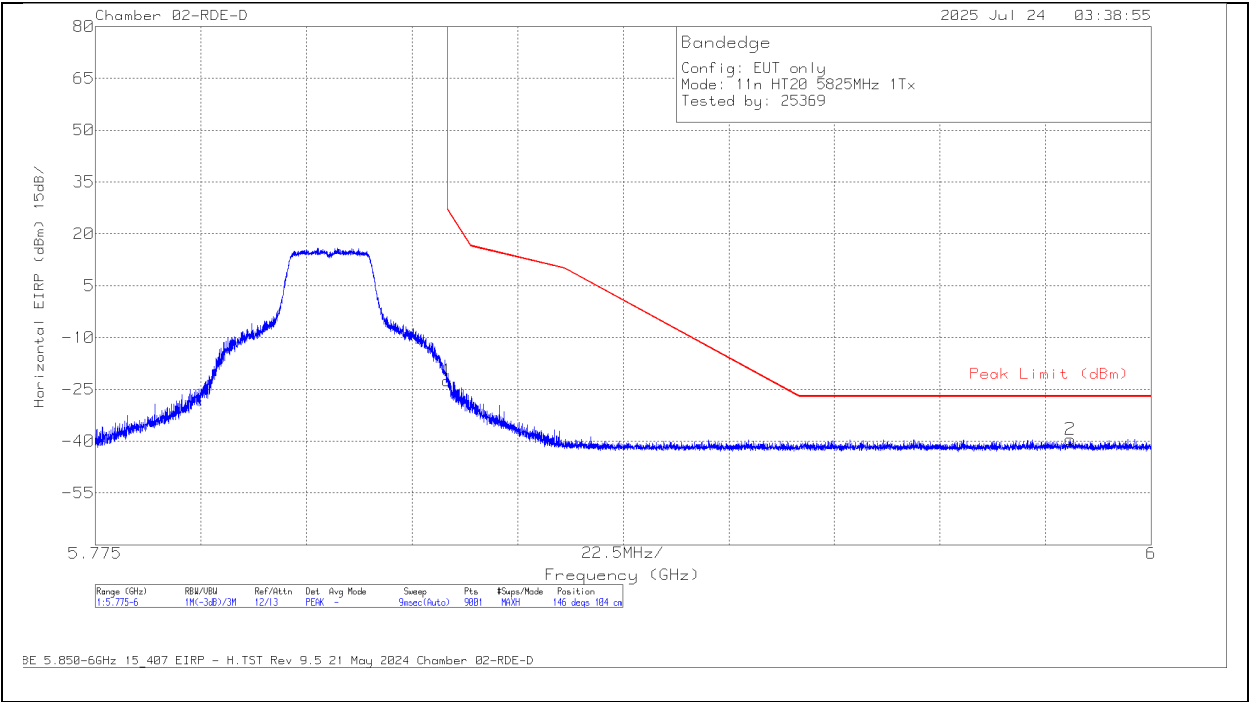


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.27	Pk	35.2	11.8	-34.2	0	-22.47	27	-49.47	146	104	H
2	5.98275	-52.7	Pk	35.6	11.8	-34.1	0	-39.4	-27	-12.4	146	104	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

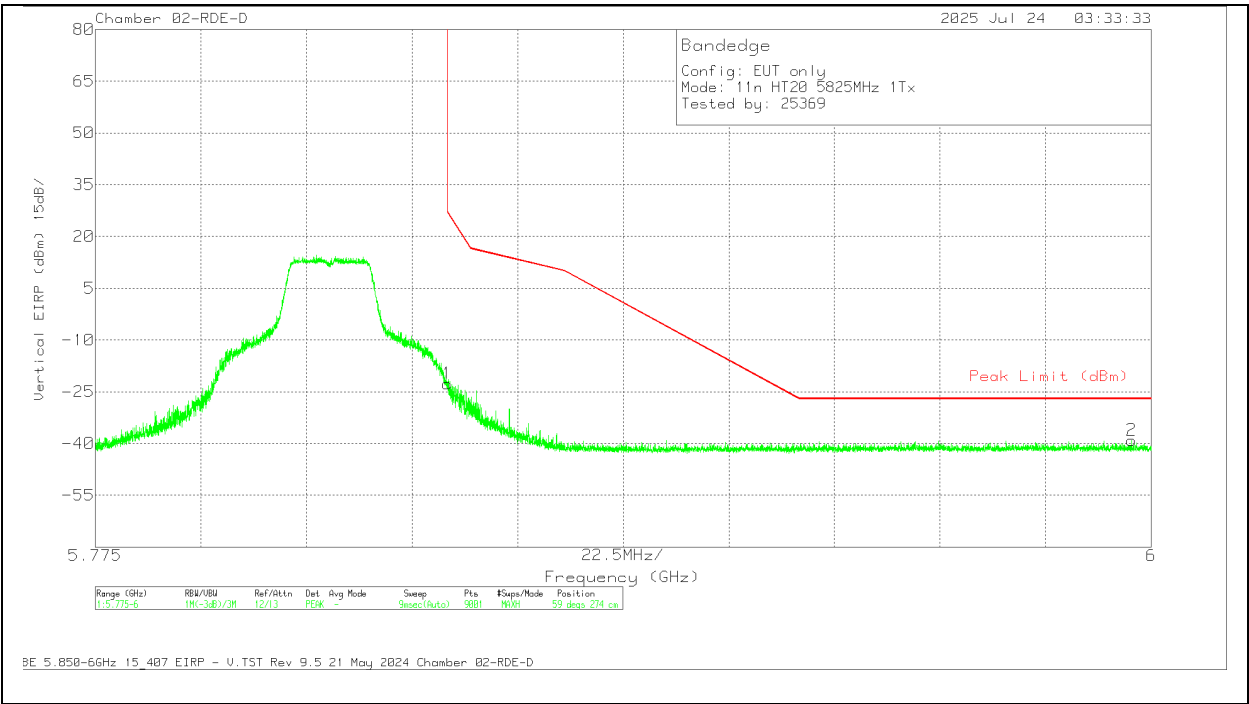

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226674 ACF (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.43	Pk	35.2	11.8	-34.2	0	-22.63	27	-49.63	59	274	V
2	5.9958	-52.33	Pk	35.6	11.8	-34.1	0	-39.03	-27	-12.03	59	274	V

Pk - Peak detector


1.1.26. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6 + 5	5.648817	-47.77	Pk	35.1	-37.49	11.8	0	-38.36	-27	-11.36	330	147	H
			5.725	-19.51	Pk	35	-37.21	11.8	0	-9.92	27	-36.92	330	147	H
			5.649567	-47.34	Pk	35.1	-37.48	11.8	0	-37.92	-27	-10.92	214	105	V
			5.725	-17.42	Pk	35	-37.21	11.8	0	-7.83	27	-34.83	214	105	V
	5825		5.85	-27.67	Pk	35.1	-36.78	11.8	0	-17.55	27	-44.55	273	222	H
			5.999025	-48.12	Pk	35.3	-36.3	11.8	0	-37.32	-27	-10.32	273	222	H
			5.85	-29.81	Pk	35.1	-36.78	11.8	0	-19.69	27	-46.69	189	236	V
			5.9251	-48.52	Pk	35.2	-36.51	11.8	0	-38.03	-27	-11.03	189	236	V
HT40	5755	6 + 5	5.649603	-64.94	Pk	34.4	-17.4	11.8	0	-36.14	-27	-9.14	165	298	H
			5.725	-39.51	Pk	34.5	-17.4	11.8	0	-10.61	27	-37.61	165	298	H
			5.632051	-64.23	Pk	34.3	-17.6	11.8	0	-35.73	-27	-8.73	118	119	V
			5.725	-44.57	Pk	34.5	-17.4	11.8	0	-15.67	27	-42.67	118	119	V
	5795		5.85	-60.92	Pk	34.9	-16.4	11.8	0	-30.62	27	-57.62	155	233	H
			5.954125	-65.84	Pk	35.2	-16.2	11.8	0	-35.04	-27	-8.04	155	233	H
			5.85	-61.8	Pk	34.9	-16.4	11.8	0	-31.5	27	-58.5	95	124	V
			5.946756	-66.35	Pk	35.2	-16.3	11.8	0	-35.65	-27	-8.65	95	124	V
VHT80	5775 (Lower)	6 + 5	5.6444	-43.04	Pk	34.8	-36.6	11.8	0	-33.04	-27	-6.04	214	193	H
			5.725	-22.87	Pk	34.9	-36.29	11.8	0	-12.46	27	-39.46	214	193	H
			5.646517	-41.77	Pk	34.8	-36.59	11.8	0	-31.76	-27	-4.76	164	115	V
			5.725	-24.24	Pk	34.9	-36.29	11.8	0	-13.83	27	-40.83	164	115	V
	5775 (Upper)		5.85	-26.16	Pk	35.1	-35.92	11.8	0	-15.18	27	-42.18	211	173	H
			5.924575	-46.44	Pk	35.2	-35.87	11.8	0	-35.31	-26.69	-8.62	211	173	H
			5.85	-30.78	Pk	35.1	-35.92	11.8	0	-19.8	27	-46.8	137	162	V
			5.9275	-47.3	Pk	35.2	-35.86	11.8	0	-36.16	-27	-9.16	137	162	V

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

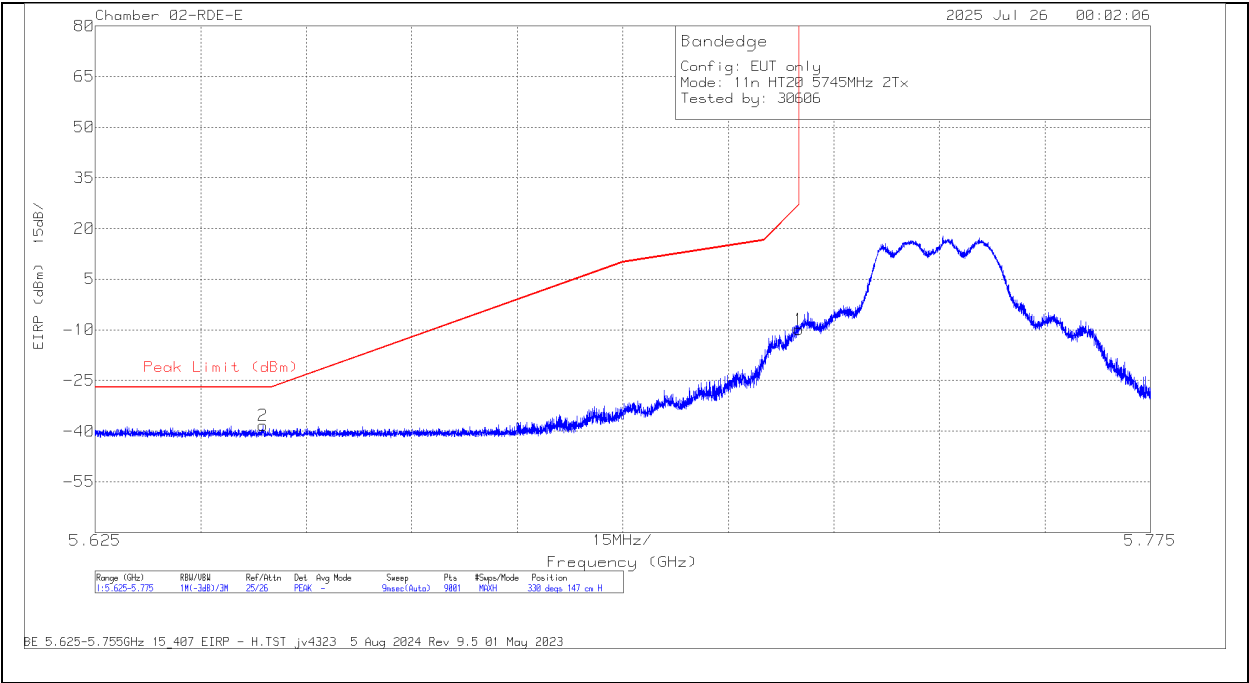


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648817	-47.77	Pk	35.1	11.8	-37.49	0	-38.36	-27	-11.36	330	147	H
1	5.725	-19.51	Pk	35	11.8	-37.21	0	-9.92	27	-36.92	330	147	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

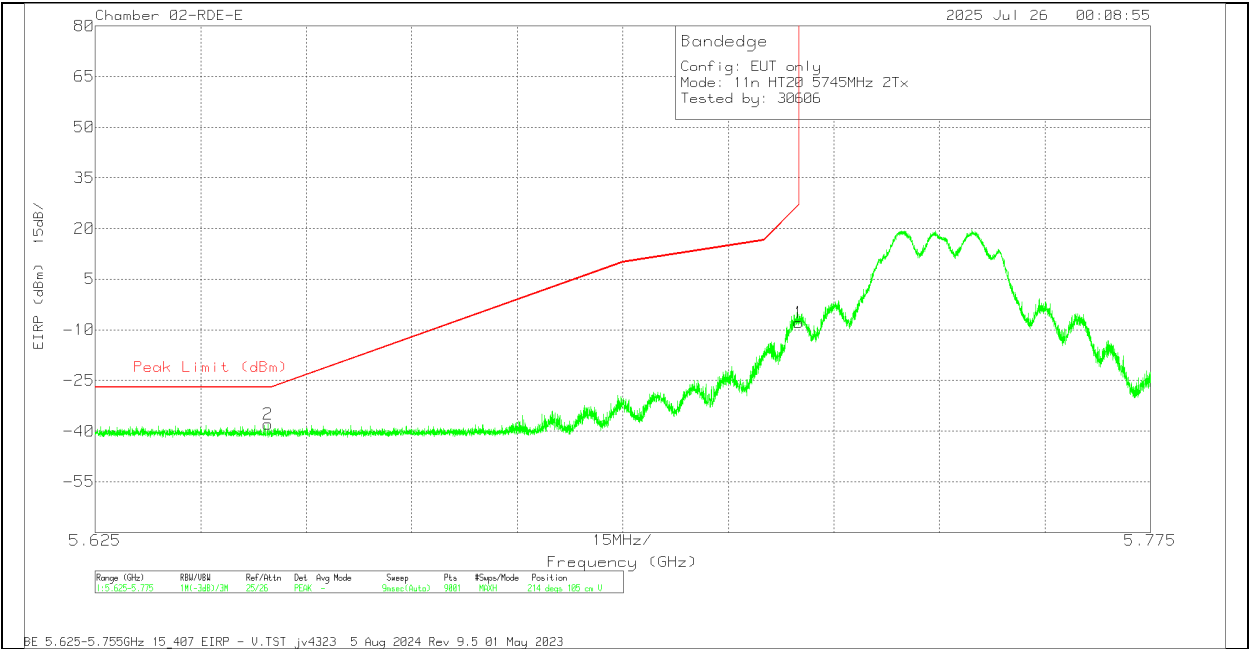


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649567	-47.34	Pk	35.1	11.8	-37.48	0	-37.92	-27	-10.92	214	105	V
1	5.725	-17.42	Pk	35	11.8	-37.21	0	-7.83	27	-34.83	214	105	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

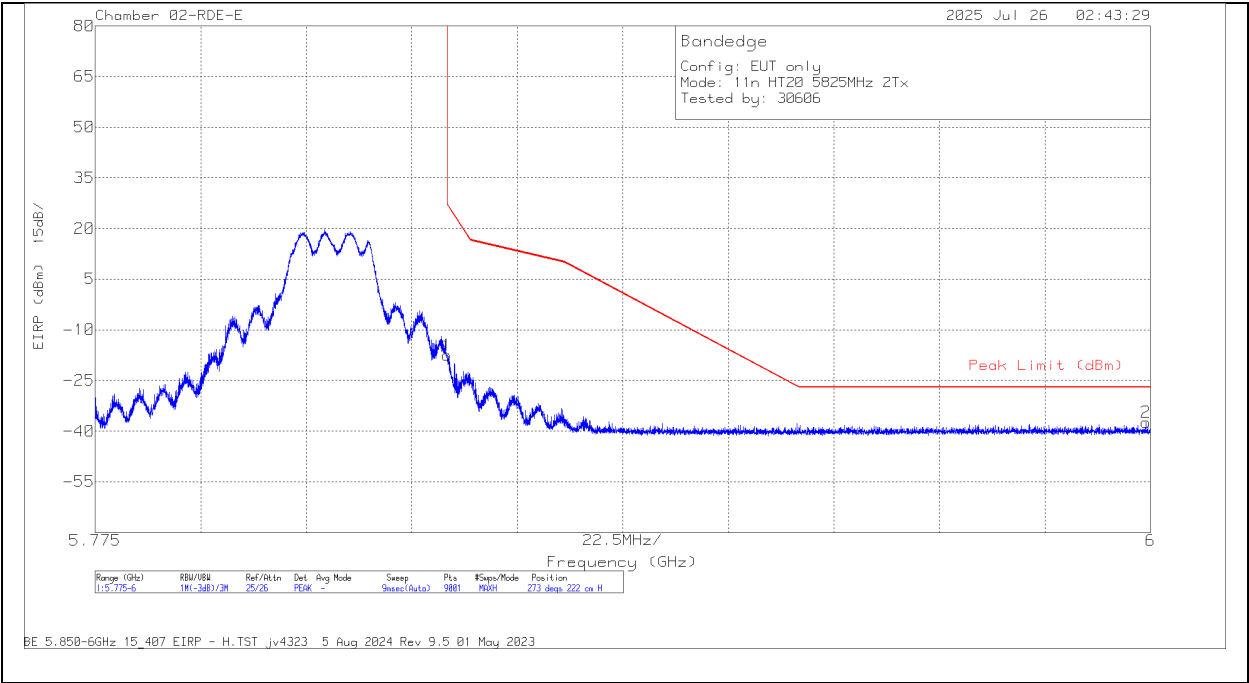


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-27.67	Pk	35.1	11.8	-36.78	0	-17.55	27	-44.55	273	222	H
2	5.999025	-48.12	Pk	35.3	11.8	-36.3	0	-37.32	-27	-10.32	273	222	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

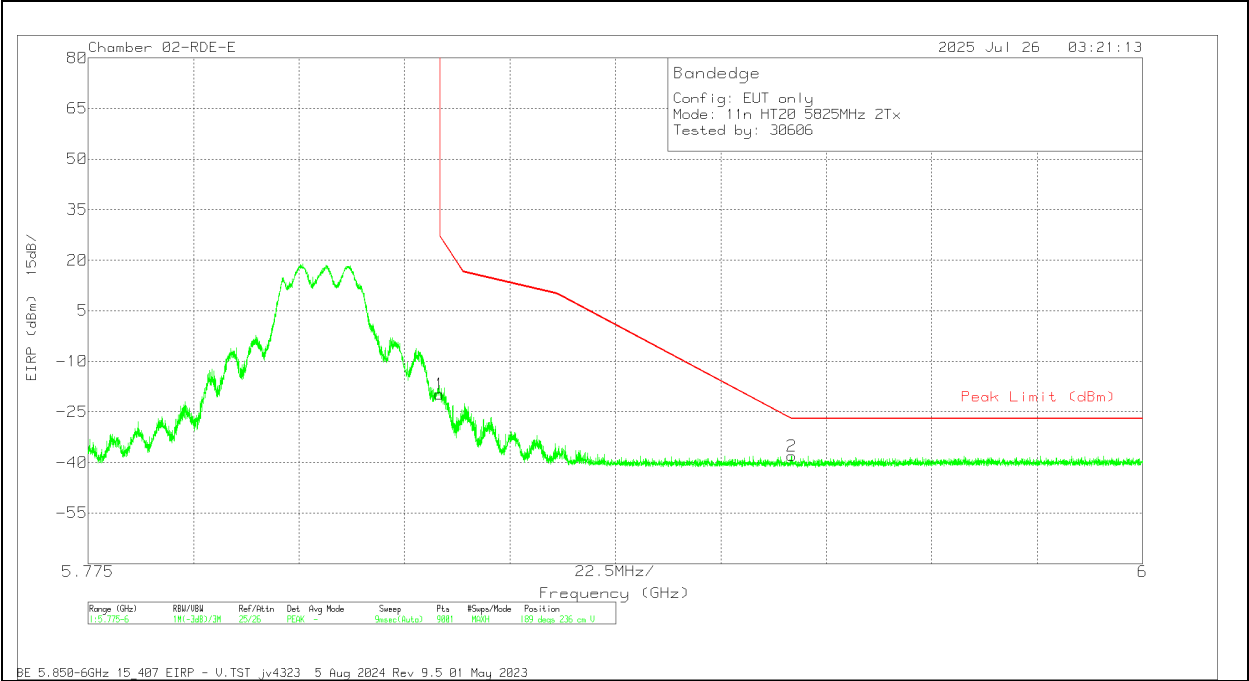

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-29.81	Pk	35.1	11.8	-36.78	0	-19.69	27	-46.69	189	236	V
2	5.9251	-48.52	Pk	35.2	11.8	-36.51	0	-38.03	-27	-11.03	189	236	V

Pk - Peak detector


1.1.27. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	5745	6	5.6494	-48	Pk	34.4	-37.25	11.8	0	-39.05	-27	-12.05	358	169	H	
			5.725	-20.15	Pk	34.5	-37.07	11.8	0	-10.92	27	-37.92	358	169	H	
			5.649267	-47.63	Pk	34.4	-37.23	11.8	0	-38.66	-27	-11.66	324	142	V	
			5.725	-18.4	Pk	34.5	-37.07	11.8	0	-9.17	27	-36.17	324	142	V	
			5.85	-28.02	Pk	34.9	-36.6	11.8	0	-17.92	27	-44.92	358	111	H	
			5.998425	-48.76	Pk	35.3	-36.06	11.8	0	-37.72	-27	-10.72	358	111	H	
	5825		5.85	-24.88	Pk	34.9	-36.6	11.8	0	-14.78	27	-41.78	327	226	V	
			5.9692	-48.27	Pk	35.2	-36.01	11.8	0	-37.28	-27	-10.28	327	226	V	
		5745	5	5.638217	-64.03	Pk	34.7	-23.5	11.8	0	-41.03	-27	-14.03	265	129	H
				5.725	-36.51	Pk	34.8	-23.1	11.8	0	-13.01	27	-40.01	265	129	H
				5.650117	-64.46	Pk	34.7	-23.5	11.8	0	-41.46	-26.91	-14.55	163	135	V
				5.725	-34.46	Pk	34.8	-23.1	11.8	0	-10.96	27	-37.96	163	135	V
	5.85			-38.92	Pk	35	-29.8	11.8	0	-21.92	27	-48.92	149	235	H	
	5.953816			-54.65	Pk	35.2	-29.6	11.8	0	-37.25	-27	-10.25	149	235	H	
5825	5.85	-35.79		Pk	35	-29.8	11.8	0	-18.79	27	-45.79	42	145	V		
	5.966137	-54.86		Pk	35.2	-29.5	11.8	0	-37.36	-27	-10.36	42	145	V		
	EHT40 (SU Mode)	5755	6	5.640717	-47.04	Pk	34.7	-35.24	11.8	0	-35.78	-27	-8.78	74	127	H
				5.725	-20.99	Pk	34.7	-35.3	11.8	0	-9.79	27	-36.79	74	127	H
				5.6267	-48.79	Pk	34.7	-35.41	11.8	0	-37.7	-27	-10.7	353	112	V
				5.725	-31.02	Pk	34.7	-35.3	11.8	0	-19.82	27	-46.82	353	112	V
5850				-35.99	Pk	35	-34.97	11.8	0	-24.16	27	-51.16	341	129	H	
5940.025				-48.06	Pk	35.3	-34.64	11.8	0	-35.6	-27	-8.6	341	129	H	
5795		5626.7		-48.79	Pk	34.7	-35.41	11.8	0	-37.7	-27	-10.7	353	112	V	
		5725		-31.02	Pk	34.7	-35.3	11.8	0	-19.82	27	-46.82	353	112	V	
		5755	5	5.725	-25.94	Pk	34.5	-35	11.8	0	-14.64	27	-41.64	271	166	H
				5.649751	-48.53	Pk	34.3	-35.08	11.8	0	-37.51	-27	-10.51	271	166	H
				5.725	-24.98	Pk	34.5	-35	11.8	0	-13.68	27	-40.68	156	123	V
				5.650034	-48.42	Pk	34.3	-35.1	11.8	0	-37.42	-26.97	-10.45	156	123	V
5.85				-46.57	Pk	34.8	-34.8	11.8	0	-34.77	27	-61.77	271	152	H	
5.994275				-49.84	Pk	35.2	-34.77	11.8	0	-37.61	-27	-10.61	271	152	H	
5795	5.85	-40.67		Pk	34.8	-34.8	11.8	0	-28.87	27	-55.87	155	165	V		
	5.9676	-49.67		Pk	35.1	-34.7	11.8	0	-37.47	-27	-10.47	155	165	V		
	EHT80 (SU Mode)	5775 (Lower)	6	5.648234	-64.88	Pk	34.3	-17.5	11.8	0	-36.28	-27	-9.28	340	148	H
				5.725	-46.72	Pk	34.5	-17.4	11.8	0	-17.82	27	-44.82	340	148	H
				5.640414	-65.9	Pk	34.3	-17.5	11.8	0	-37.3	-27	-10.3	306	306	V
				5.725	-51.85	Pk	34.5	-17.4	11.8	0	-22.95	27	-49.95	306	306	V
5.85				-50.99	Pk	34.9	-16.4	11.8	0	-20.69	27	-47.69	343	141	H	
5.930441				-65.95	Pk	35.1	-16.2	11.8	0	-35.25	-27	-8.25	343	141	H	
5775 (Upper)		5.85		-56.44	Pk	34.9	-16.4	11.8	0	-26.14	27	-53.14	250	147	V	
		5.980398		-66.05	Pk	35.2	-16.4	11.8	0	-35.45	-27	-8.45	250	147	V	
		5775 (Lower)	5	5.649284	-54.7	Pk	34.7	-23.5	11.8	0	-31.7	-27	-4.7	272	173	H
				5.725	-39.44	Pk	34.8	-23.1	11.8	0	-15.94	27	-42.94	272	173	H
				5.645567	-55.01	Pk	34.7	-23.5	11.8	0	-32.01	-27	-5.01	161	101	V
				5.725	-38.27	Pk	34.8	-23.1	11.8	0	-14.77	27	-41.77	161	101	V
5.85				-30.89	Pk	35.2	-34.2	11.8	0	-18.09	27	-45.09	354	251	H	
5.92445				-50.33	Pk	35.4	-34.4	11.8	0	-37.53	-26.59	-10.94	354	251	H	
5775 (Upper)	5.85	-33.63		Pk	35.2	-34.2	11.8	0	-20.83	27	-47.83	266	215	V		
	5.943525	-51.57		Pk	35.5	-34.2	11.8	0	-38.47	-27	-11.47	266	215	V		

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHZ)

HORIZONTAL RESULT

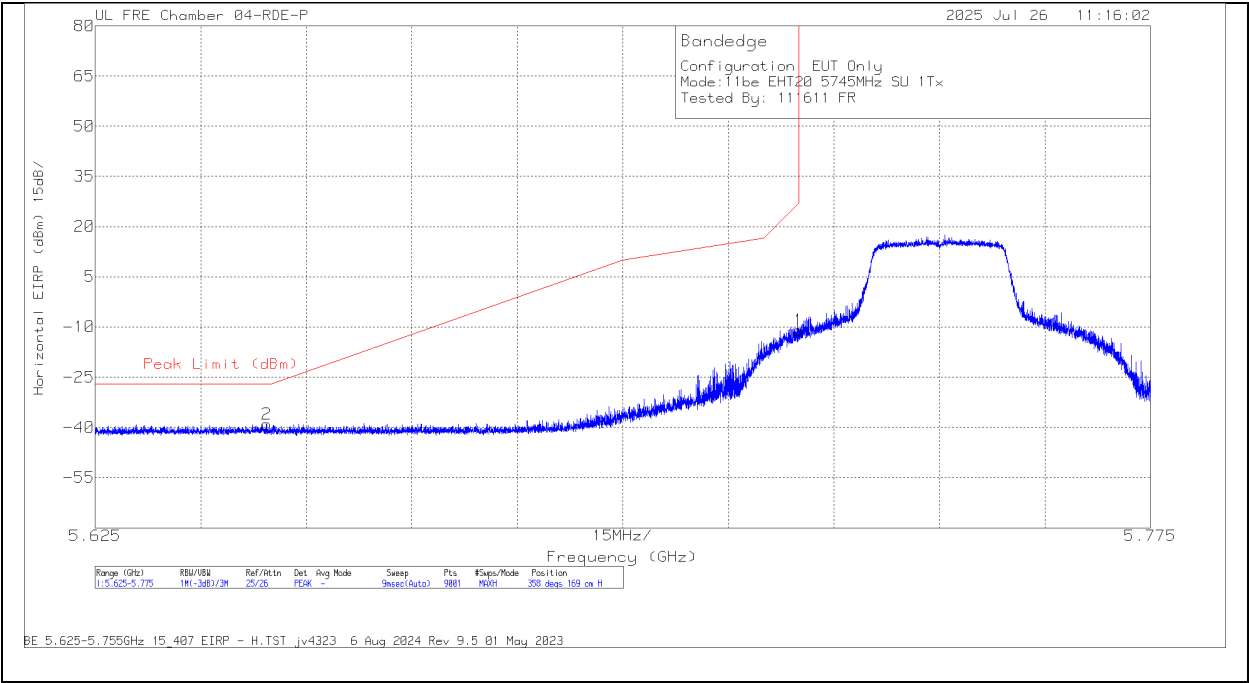


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6494	-48	Pk	34.4	11.8	-37.25	0	-39.05	-27	-12.05	358	169	H
1	5.725	-20.15	Pk	34.5	11.8	-37.07	0	-10.92	27	-37.92	358	169	H

Pk - Peak detector

BANDEDGE (LOW CHANNEL / 5745MHZ)

VERTICAL RESULT

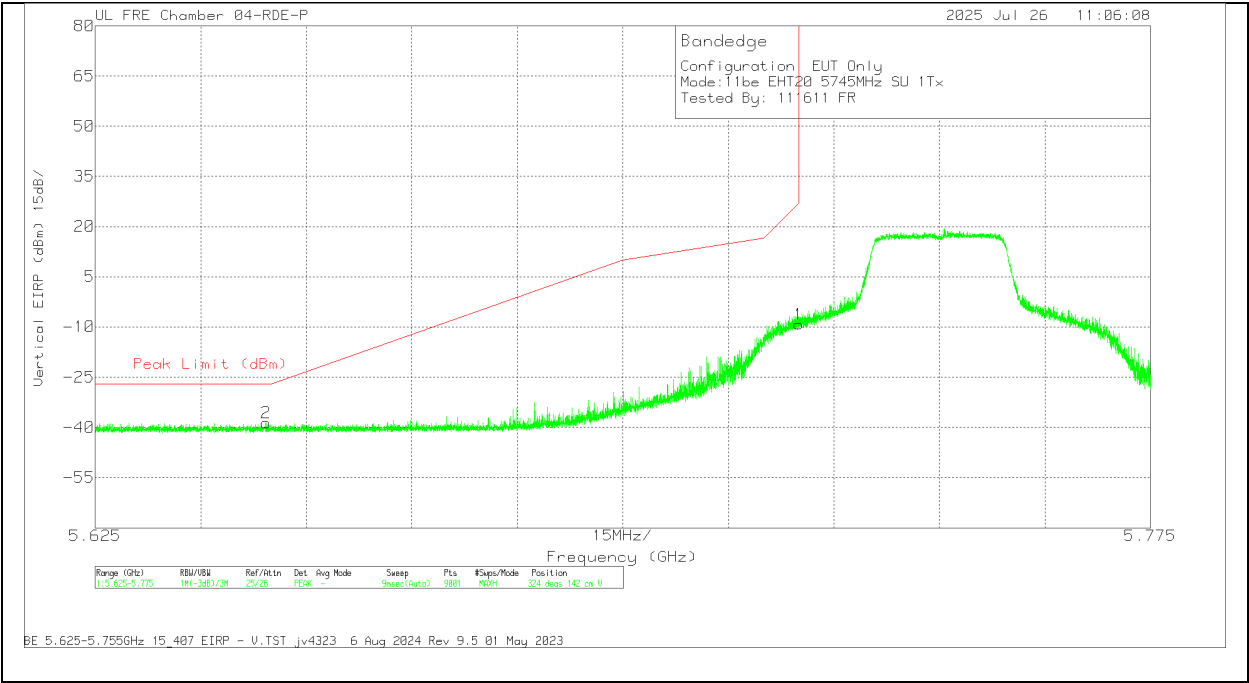


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649267	-47.63	Pk	34.4	11.8	-37.23	0	-38.66	-27	-11.66	324	142	V
1	5.725	-18.4	Pk	34.5	11.8	-37.07	0	-9.17	27	-36.17	324	142	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

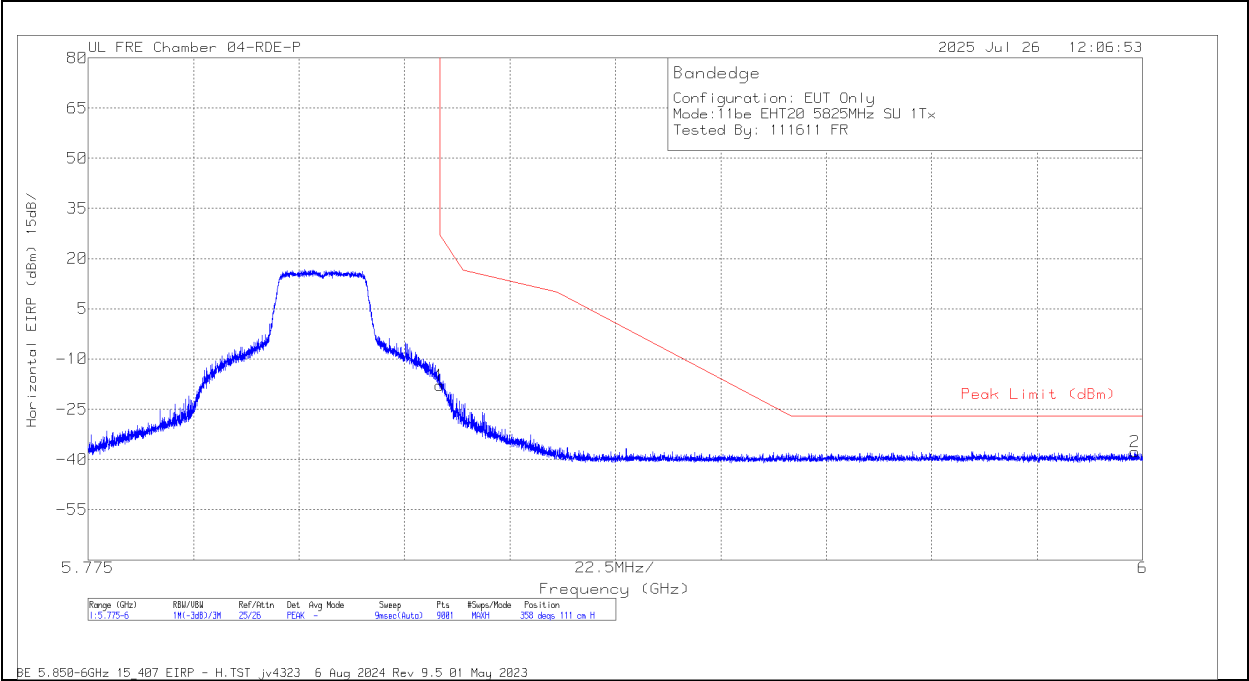


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-28.02	Pk	34.9	11.8	-36.6	0	-17.92	27	-44.92	358	111	H
2	5.998425	-48.76	Pk	35.3	11.8	-36.06	0	-37.72	-27	-10.72	358	111	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

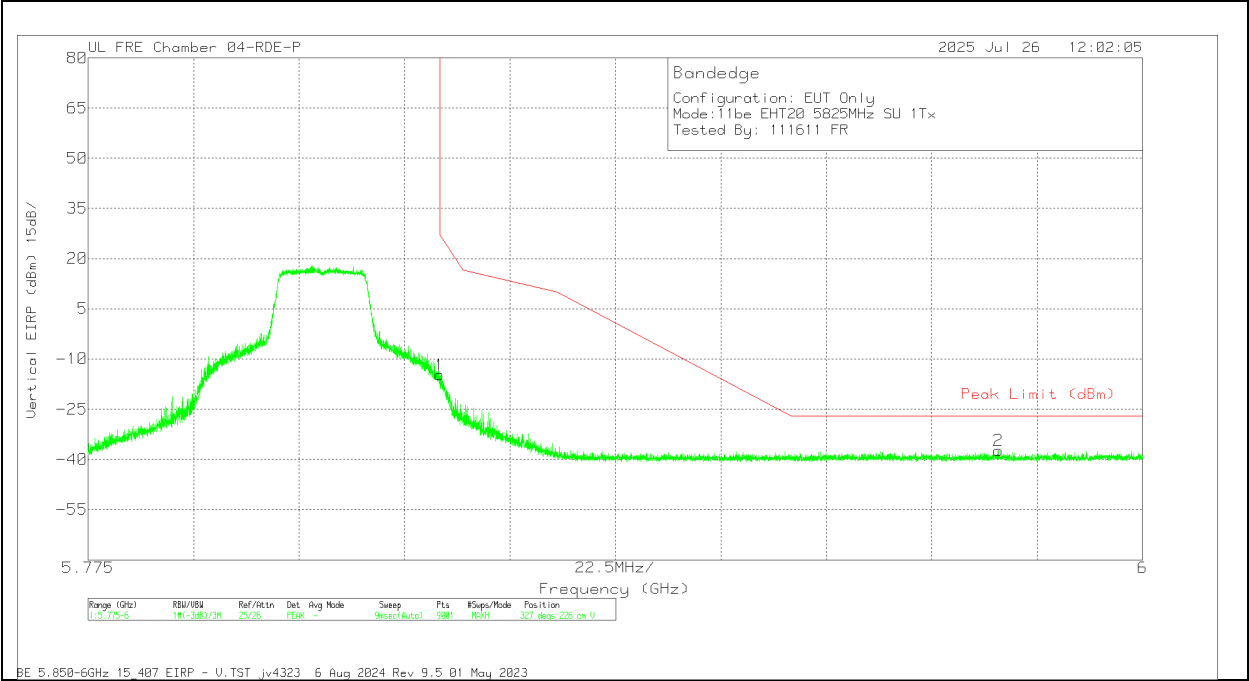

Pk - Peak detector

1.1.28. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGES


UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T) / Index 0	5745	6	5.646584	-47.48	Pk	34.4	-37.3	11.8	0	-38.58	-27	-11.58	269	221	H
			5.725	-37.91	Pk	34.6	-37	11.8	0	-28.51	27	-55.51	269	221	H
			5.637	-47.26	Pk	34.4	-37.4	11.8	0	-38.46	-27	-11.46	180	173	V
			5.725	-28.52	Pk	34.6	-37	11.8	0	-19.12	27	-46.12	180	173	V
			5.85	-42.09	Pk	35	-36.9	11.8	0	-32.19	27	-59.19	283	196	H
EHT20 (26T) / Index 8	5825	6	5.95255	-47.93	Pk	35.3	-36.5	11.8	0	-37.33	-27	-10.33	283	196	H
			5.85	-30.84	Pk	35	-36.9	11.8	0	-20.94	27	-47.94	227	358	V
			5.9534	-47.38	Pk	35.3	-36.5	11.8	0	-36.78	-27	-9.78	227	358	V
			5.63505	-49.14	Pk	34.6	-36.18	11.8	0	-38.92	-27	-11.92	225	204	H
			5.725	-47.58	Pk	34.8	-36.16	11.8	0	-37.14	27	-64.14	225	204	H
EHT20 (26T) / Index 0	5745	5	5.6442	-49.19	Pk	34.6	-36.23	11.8	0	-39.02	-27	-12.02	347	146	V
			5.725	-47.45	Pk	34.8	-36.16	11.8	0	-37.01	27	-64.01	347	146	V
			5.85	-54.3	Pk	35	-33.9	11.8	0	-41.4	27	-68.4	193	219	H
			5.987937	-65.02	Pk	35.3	-33.8	11.8	0	-51.72	-27	-24.72	193	219	H
			5.85	-48.03	Pk	35	-33.9	11.8	0	-35.13	27	-62.13	75	151	V
EHT20 (26T) / Index 8	5825	5	5.958739	-64.37	Pk	35.3	-33.7	11.8	0	-50.97	-27	-23.97	75	151	V
			5.646567	-47.91	Pk	34.4	-37.18	11.8	0	-38.89	-27	-11.89	32	229	H
			5.725	-35.75	Pk	34.5	-37.07	11.8	0	-26.52	27	-53.52	32	229	H
			5.644517	-47.88	Pk	34.4	-37.23	11.8	0	-38.91	-27	-11.91	296	112	V
			5.725	-35.66	Pk	34.5	-37.07	11.8	0	-26.43	27	-53.43	296	112	V
EHT40 (106T) / Index 53	5755	6	5.85	-50.27	Pk	35.1	-35.92	11.8	0	-39.29	27	-66.29	195	128	H
			5.988875	-49.34	Pk	35.3	-35.77	11.8	0	-38.01	-27	-11.01	195	128	H
			5.85	-50.66	Pk	35.1	-35.92	11.8	0	-39.68	27	-66.68	152	380	V
			5.969275	-48.39	Pk	35.2	-35.82	11.8	0	-37.21	-27	-10.21	152	380	V
			5.626133	-47.13	Pk	35	-38.47	11.8	0	-38.8	-27	-11.8	324	170	H
EHT40 (106T) / Index 53	5755	5	5.725	-39.34	Pk	35.1	-38.19	11.8	0	-30.63	27	-57.63	324	170	H
			5.629983	-47.41	Pk	35	-38.52	11.8	0	-39.13	-27	-12.13	207	114	V
			5.725	-36.71	Pk	35.1	-38.19	11.8	0	-28	27	-55	207	114	V
			5.85	-49.99	Pk	35.1	-37.78	11.8	0	-40.87	27	-67.87	321	148	H
			5.9603	-48.23	Pk	35.3	-37.52	11.8	0	-38.65	-27	-11.65	321	148	H
EHT40 (106T) / Index 56	5795	5	5.85	-49.43	Pk	35.1	-37.78	11.8	0	-40.31	27	-67.31	218	104	V
			5.95145	-47.77	Pk	35.3	-37.55	11.8	0	-38.22	-27	-11.22	218	104	V
			5.637584	-49.05	Pk	34.7	-35.2	11.8	0	-37.75	-27	-10.75	66	163	H
			5.725	-34.67	Pk	34.7	-35.3	11.8	0	-23.47	27	-50.47	66	163	H
			5.632567	-48.66	Pk	34.7	-35.19	11.8	0	-37.35	-27	-10.35	345	140	V
EHT80 (484T / Index 65)	5775 (Lower)	6	5.725	-45.09	Pk	34.7	-35.3	11.8	0	-33.89	27	-60.89	345	140	V
			5.85	-46.5	Pk	35	-34.97	11.8	0	-34.67	27	-61.67	46	230	H
			5.986475	-48.19	Pk	35.3	-34.82	11.8	0	-35.91	-27	-8.91	46	230	H
			5.85	-50.82	Pk	35	-34.97	11.8	0	-38.99	27	-65.99	263	389	V
			5.9978	-48.84	Pk	35.3	-34.81	11.8	0	-36.55	-27	-9.55	263	389	V
EHT80 (484T / Index 65)	5775 (Lower)	5	5.6282	-49.04	Pk	34.7	-35.4	11.8	0	-37.94	-27	-10.94	81	231	H
			5.725	-38.35	Pk	34.7	-35.3	11.8	0	-27.15	27	-54.15	81	231	H
			5.646634	-49.39	Pk	34.7	-35.32	11.8	0	-38.21	-27	-11.21	69	295	V
			5.725	-42.51	Pk	34.7	-35.3	11.8	0	-31.31	27	-58.31	69	295	V
			5.85	-50.04	Pk	35	-34.97	11.8	0	-38.21	27	-65.21	138	177	H
EHT80 (484T / Index 66)	5775 (Upper)	5	5.99115	-48.84	Pk	35.3	-34.75	11.8	0	-36.49	-27	-9.49	138	177	H
			5.85	-62.23	Pk	35	-22.61	11.8	0	-38.04	27	-65.04	52	133	V
			5.997275	-64.06	Pk	35.3	-22.95	11.8	0	-39.91	-27	-12.91	52	133	V
			5.63335	-49.15	Pk	34.7	-35.13	11.8	0	-37.78	-27	-10.78	64	116	H
			5.725	-39.48	Pk	34.7	-35.3	11.8	0	-28.28	27	-55.28	64	116	H
EHT80 (106T / Index 53)	5775 (Lower)	6	5.649284	-48.89	Pk	34.7	-35.3	11.8	0	-37.69	-27	-10.69	351	167	V
			5.725	-48.89	Pk	34.7	-35.3	11.8	0	-37.69	27	-64.69	351	167	V
			5.85	-51.53	Pk	35	-34.97	11.8	0	-39.7	27	-66.7	60	310	H
			5.956975	-48.8	Pk	35.3	-34.97	11.8	0	-36.67	-27	-9.67	60	310	H
			5.85	-51.4	Pk	35	-34.97	11.8	0	-39.57	27	-66.57	130	225	V
EHT80 (106T / Index 60)	5775 (Upper)	5	5.96395	-48.81	Pk	35.3	-34.86	11.8	0	-36.57	-27	-9.57	130	225	V
			5.632517	-48.72	Pk	34.7	-35.2	11.8	0	-37.42	-27	-10.42	78	288	H
			5.725	-48.72	Pk	34.7	-35.3	11.8	0	-37.52	27	-64.52	78	288	H
			5.632483	-48.94	Pk	34.7	-35.2	11.8	0	-37.64	-27	-10.64	38	355	V
			5.725	-49.84	Pk	34.7	-35.3	11.8	0	-38.64	27	-65.64	38	355	V
EHT80 (106T / Index 53)	5775 (Lower)	5	5.85	-66.81	Pk	35	-22.61	11.8	0	-42.62	27	-69.62	134	119	H
			5.973325	-64.72	Pk	35.3	-22.77	11.8	0	-40.39	-27	-13.39	134	119	H
			5.85	-67.51	Pk	35	-22.61	11.8	0	-43.32	27	-70.32	37	105	V
			5.936175	-64.62	Pk	35.3	-22.79	11.8	0	-40.31	-27	-13.31	37	105	V

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

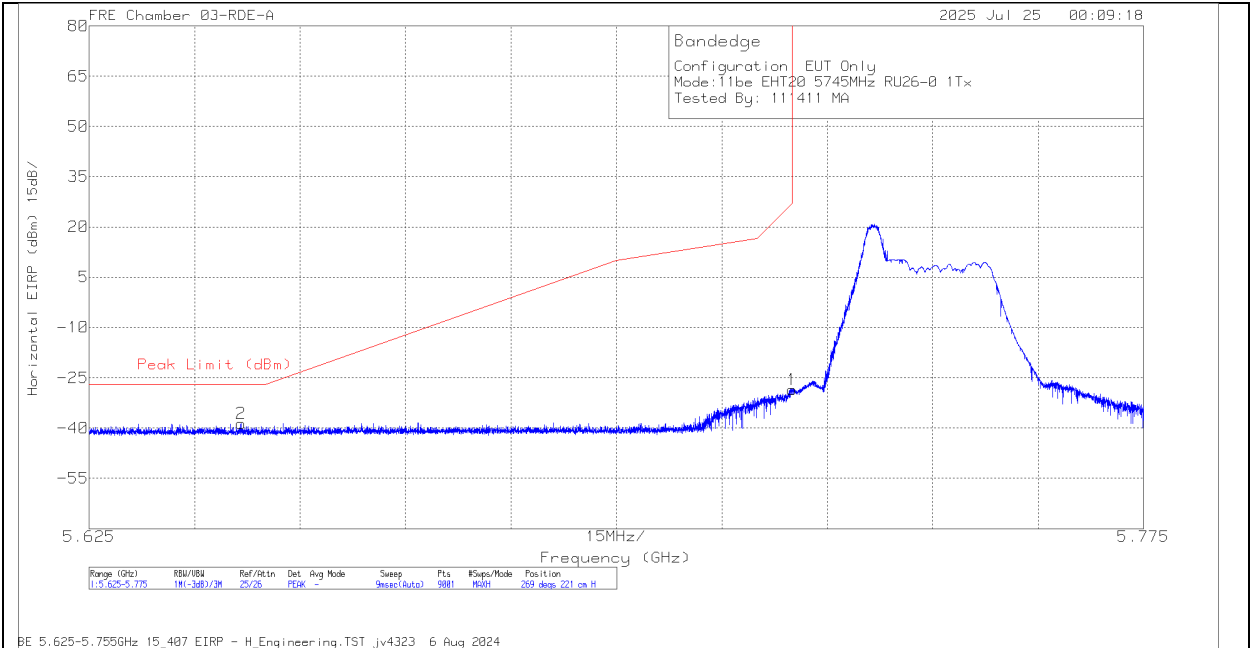


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646584	-47.48	Pk	34.4	11.8	0	-37.3	-38.58	-27	-11.58	269	221	H
1	5.725	-37.91	Pk	34.6	11.8	0	-37	-28.51	27	-55.51	269	221	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

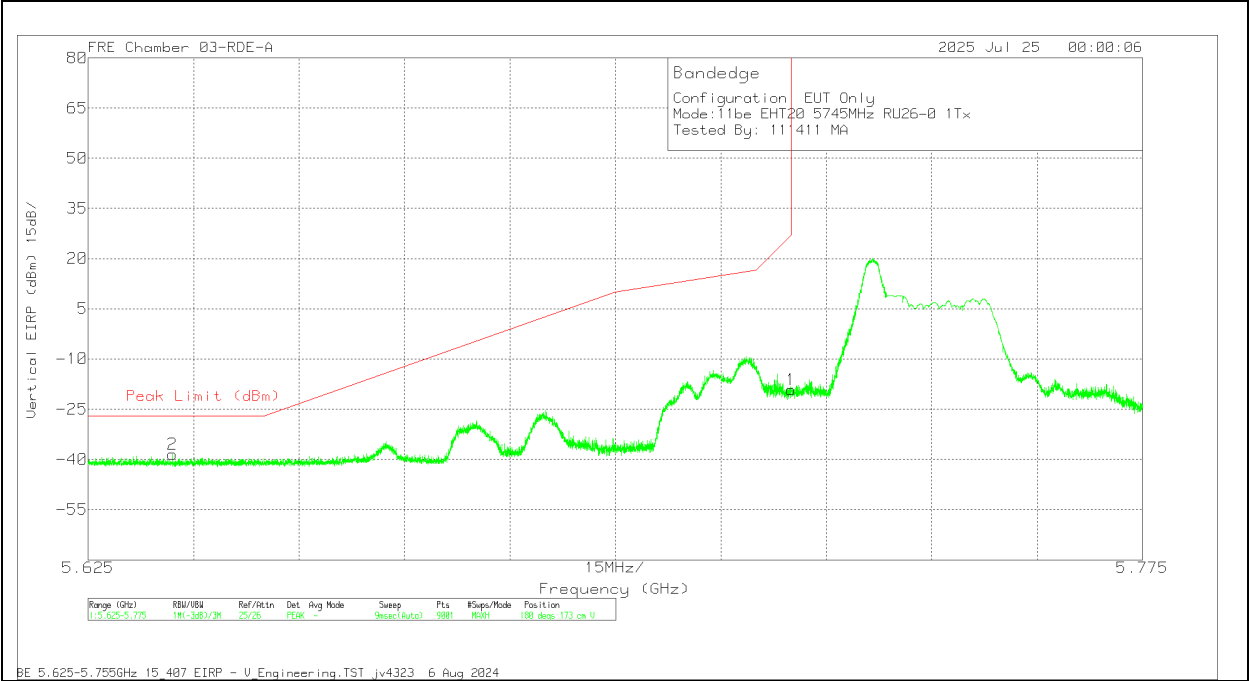


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.637	-47.26	Pk	34.4	11.8	0	-37.4	-38.46	-27	-11.46	180	173	V
1	5.725	-28.52	Pk	34.6	11.8	0	-37	-19.12	27	-46.12	180	173	V

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

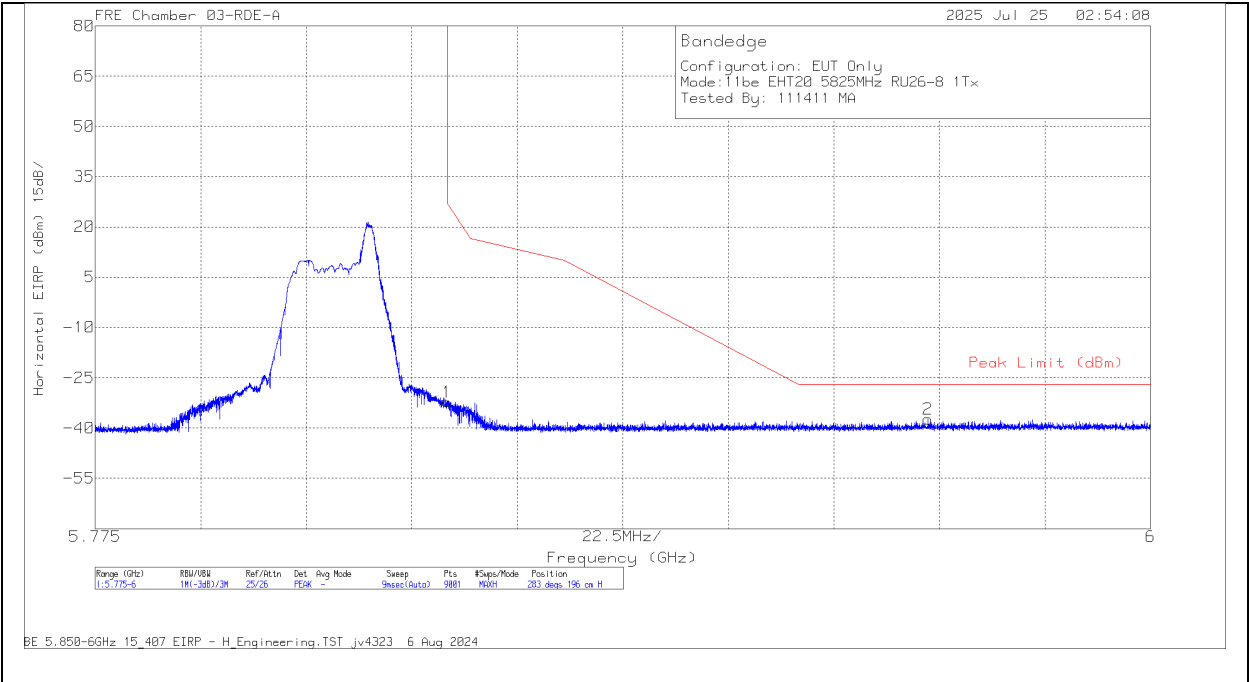


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.09	Pk	35	11.8	0	-36.9	-32.19	27	-59.19	283	196	H
2	5.95255	-47.93	Pk	35.3	11.8	0	-36.5	-37.33	-27	-10.33	283	196	H

Pk - Peak detector

1TX Antenna 6 MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

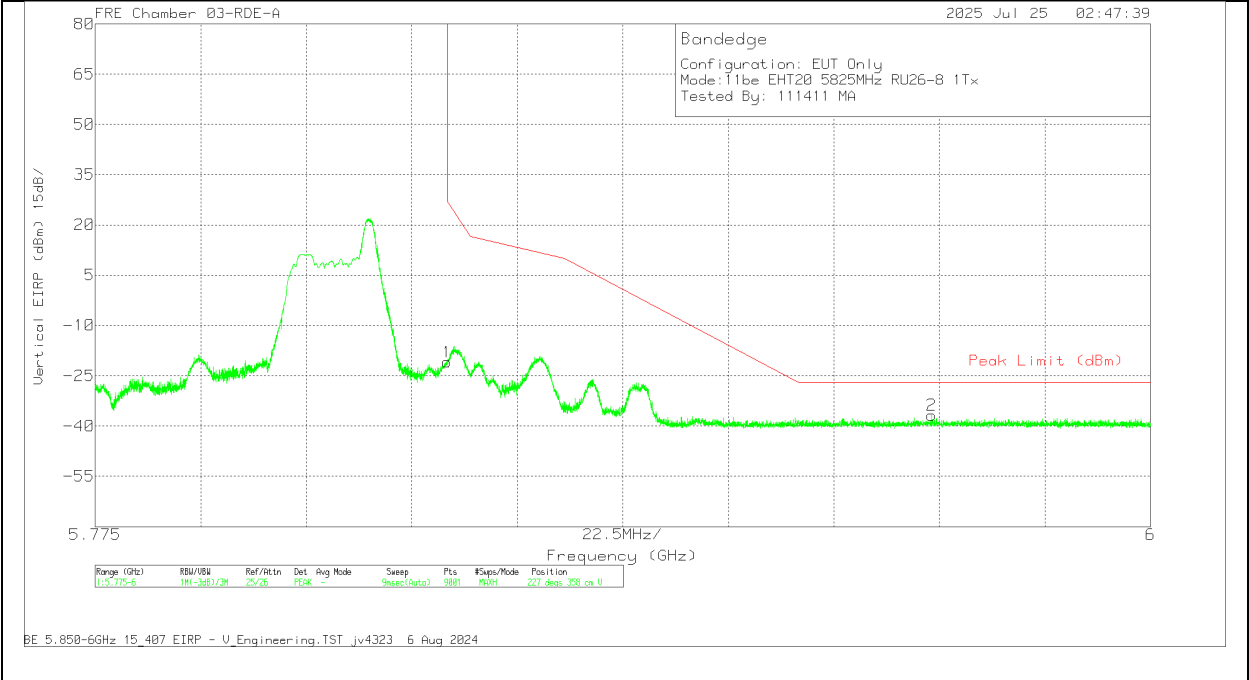

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-30.84	Pk	35	11.8	0	-36.9	-20.94	27	-47.94	227	358	V
2	5.9534	-47.38	Pk	35.3	11.8	0	-36.5	-36.78	-27	-9.78	227	358	V

Pk - Peak detector

1.1.29. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGES


UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5745	6 + 5	5.643084	-48.76	Pk	34.8	-36.6	11.8	0	-38.76	-27	-11.76	267	221	H
			5.725	-22.68	Pk	34.9	-36.29	11.8	0	-12.27	27	-39.27	267	221	H
			5.642134	-47.56	Pk	34.8	-36.58	11.8	0	-37.54	-27	-10.54	181	102	V
			5.725	-15.53	Pk	34.9	-36.29	11.8	0	-5.12	27	-32.12	181	102	V
	5825		5.85	-40.98	Pk	35.1	-35.92	11.8	0	-30	27	-57	31	200	H
			5.982575	-48.94	Pk	35.3	-35.76	11.8	0	-37.6	-27	-10.6	31	200	H
			5.85	-33.36	Pk	35.1	-35.92	11.8	0	-22.38	27	-49.38	341	123	V
			5.992975	-49.35	Pk	35.3	-35.75	11.8	0	-38	-27	-11	341	123	V
EHT40 (SU Mode)	5755	6 + 5	5.644717	-42.89	Pk	34.5	-39	11.8	0	-35.59	-27	-8.59	29	273	H
			5.725	-16.03	Pk	34.6	-38.8	11.8	0	-8.43	27	-35.43	29	273	H
			5.636534	-43.63	Pk	34.5	-39	11.8	0	-36.33	-27	-9.33	341	115	V
			5.725	-20.26	Pk	34.6	-38.8	11.8	0	-12.66	27	-39.66	341	115	V
	5795		5.85	-35.05	Pk	34.9	-38.5	11.8	0	-26.85	27	-53.85	0	167	H
			5.979325	-47.56	Pk	35.2	-38.2	11.8	0	-38.76	-27	-11.76	0	167	H
			5.85	-30.19	Pk	34.9	-38.5	11.8	0	-21.99	27	-48.99	328	108	V
			5.93295	-46.73	Pk	35.1	-38.31	11.8	0	-38.14	-27	-11.14	328	108	V
EHT80 (SU Mode)	5775 (Lower)	6 + 5	5.64855	-55.13	Pk	34.7	-22.94	11.8	0	-31.57	-27	-4.57	35	234	H
			5.725	-37.34	Pk	34.7	-22.81	11.8	0	-13.65	27	-40.65	35	234	H
			5.64725	-59.95	Pk	34.7	-22.96	11.8	0	-36.41	-27	-9.41	62	321	V
			5.725	-47.27	Pk	34.7	-22.81	11.8	0	-23.58	27	-50.58	62	321	V
	5775 (Upper)		5.85	-38.8	Pk	35	-22.61	11.8	0	-14.61	27	-41.61	342	210	H
			5.92615	-59.11	Pk	35.3	-22.79	11.8	0	-34.8	-27	-7.8	342	210	H
			5.85	-53.85	Pk	35	-22.61	11.8	0	-29.66	27	-56.66	337	221	V
			5.928125	-63.63	Pk	35.3	-22.8	11.8	0	-39.33	-27	-12.33	337	221	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User


BANDEDGE (LOW CHANNEL / 5745MHz)

HORIZONTAL RESULT

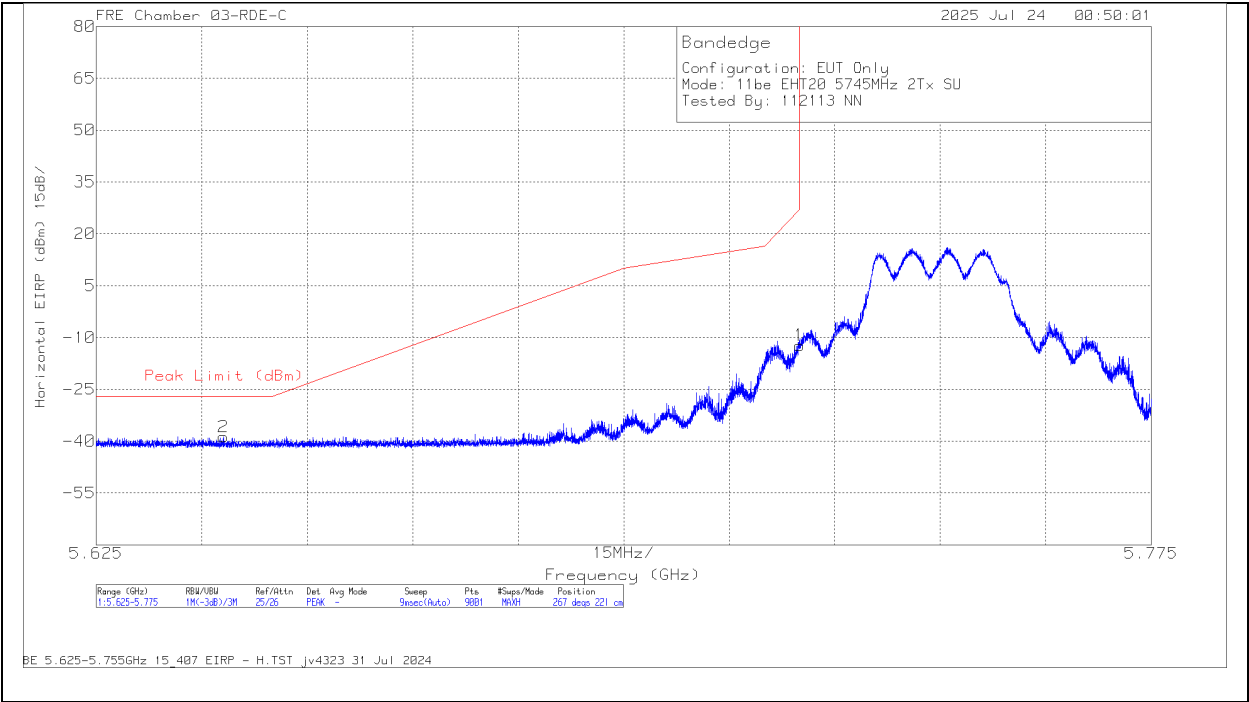

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643084	-48.76	Pk	34.8	11.8	0	-36.6	-38.76	-27	-11.76	267	221	H
1	5.725	-22.68	Pk	34.9	11.8	0	-36.29	-12.27	27	-39.27	267	221	H

Pk - Peak detector

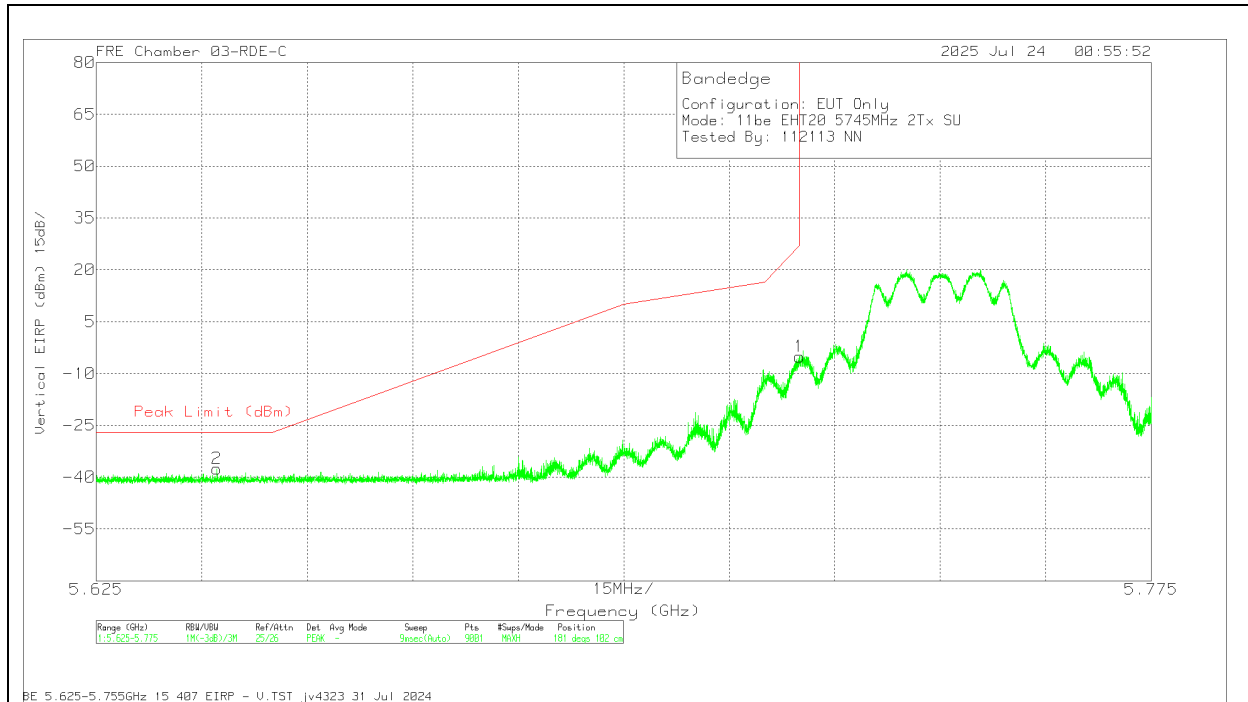
2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User**BANDEGE (LOW CHANNEL / 5745MHz)****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642134	-47.56	Pk	34.8	11.8	0	-36.58	-37.54	-27	-10.54	181	102	V
1	5.725	-15.53	Pk	34.9	11.8	0	-36.29	-5.12	27	-32.12	181	102	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

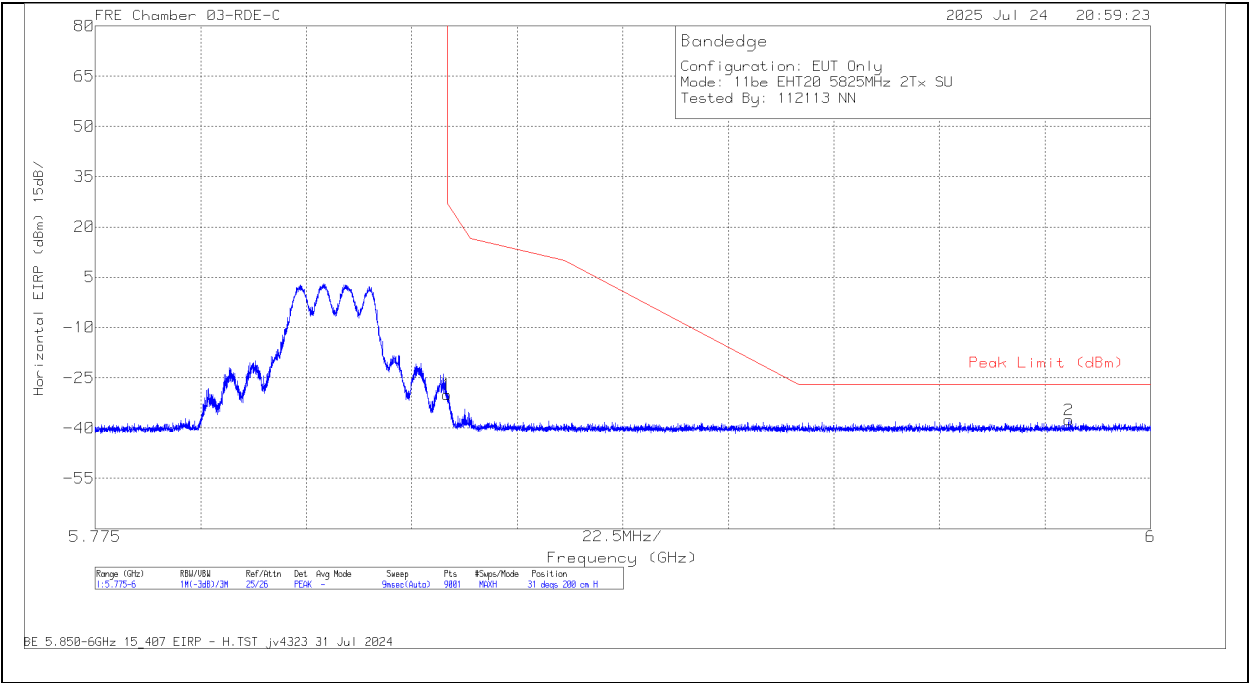


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	5.85	-40.98	Pk	35.1	11.8	0	-35.92	-30	27	-57	31	200	H
2	5.982575	-48.94	Pk	35.3	11.8	0	-35.76	-37.6	-27	-10.6	31	200	H

Pk - Peak detector

BANDEGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

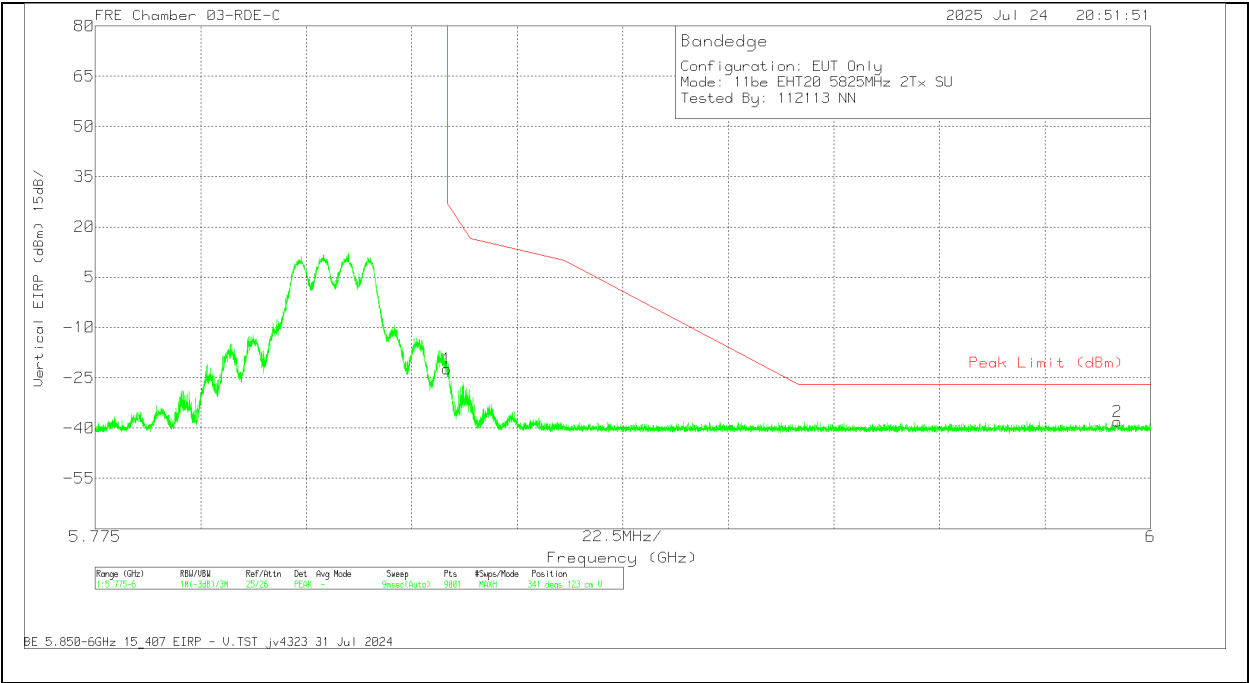


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-33.36	Pk	35.1	11.8	0	-35.92	-22.38	27	-49.38	341	123	V
2	5.992975	-49.35	Pk	35.3	11.8	0	-35.75	-38	-27	-11	341	123	V

Pk - Peak detector

1.1.30. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGES

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T) / Index 0	5745	6 + 5	5.63225	-49.72	Pk	34.3	-34.23	11.8	0	-37.85	-27	-10.85	129	173	H
			5.725	-40.79	Pk	34.5	-34.1	11.8	0	-28.59	27	-55.59	129	173	H
			5.632967	-49.33	Pk	34.3	-34.22	11.8	0	-37.45	-27	-10.45	79	195	V
			5.725	-39.4	Pk	34.5	-34.1	11.8	0	-27.2	27	-54.2	79	195	V
EHT20 (26T) / Index 8	5825		5.85	-48.42	Pk	35	-33.85	11.8	0	-35.47	27	-62.47	162	117	H
			5.995925	-49.23	Pk	35.2	-33.68	11.8	0	-35.91	-27	-8.91	162	117	H
			5.85	-51.2	Pk	35	-33.85	11.8	0	-38.25	27	-65.25	5	146	V
			5.95565	-49.15	Pk	35.2	-33.6	11.8	0	-35.75	-27	-8.75	5	146	V
EHT40 (106T) / Index 53	5755	6 + 5	5.6473	-47.88	Pk	34.4	-37.18	11.8	0	-38.86	-27	-11.86	36	260	H
			5.725	-39.79	Pk	34.5	-37.07	11.8	0	-30.56	27	-57.56	36	260	H
			5.6456	-47.98	Pk	34.4	-37.19	11.8	0	-38.97	-27	-11.97	334	177	V
			5.725	-38.61	Pk	34.5	-37.07	11.8	0	-29.38	27	-56.38	334	177	V
EHT40 (106T) / Index 56	5795		5.85	-50.75	Pk	35.1	-35.92	11.8	0	-39.77	27	-66.77	168	146	H
			5.999325	-49.17	Pk	35.3	-35.76	11.8	0	-37.83	-27	-10.83	168	146	H
			5.85	-50.84	Pk	35.1	-35.92	11.8	0	-39.86	27	-66.86	168	378	V
			5.981175	-49.23	Pk	35.3	-35.79	11.8	0	-37.92	-27	-10.92	168	378	V
EHT80 (484T / Index 65)	5775 (Lower)	6 + 5	5.636667	-48.9	Pk	34.6	-36.23	11.8	0	-38.73	-27	-11.73	44	130	H
			5.725	-38.24	Pk	34.8	-36.16	11.8	0	-27.8	27	-54.8	44	130	H
			5.64835	-48.36	Pk	34.6	-36.19	11.8	0	-38.15	-27	-11.15	329	129	V
			5.725	-32.73	Pk	34.8	-36.16	11.8	0	-22.29	27	-49.29	329	129	V
EHT80 (484T / Index 66)	5775 (Upper)		5.85	-42.56	Pk	35	-34.97	11.8	0	-30.73	27	-57.73	18	282	H
			5.99375	-48.51	Pk	35.3	-34.82	11.8	0	-36.23	-27	-9.23	18	282	H
			5.85	-44.49	Pk	35	-34.97	11.8	0	-32.66	27	-59.66	56	113	V
			5.9307	-48.56	Pk	35.3	-34.82	11.8	0	-36.28	-27	-9.28	56	113	V
EHT80 (106T / Index 53)	5775 (Lower)	6 + 5	5.62975	-48.81	Pk	34.6	-36.23	11.8	0	-38.64	-27	-11.64	5	111	H
			5.725	-45.06	Pk	34.8	-36.16	11.8	0	-34.62	27	-61.62	5	111	H
			5.64805	-49.41	Pk	34.6	-36.18	11.8	0	-39.19	-27	-12.19	350	119	V
			5.725	-40.02	Pk	34.8	-36.16	11.8	0	-29.58	27	-56.58	350	119	V
EHT80 (106T / Index 60)	5775 (Upper)		5.85	-51.53	Pk	35	-34.97	11.8	0	-39.7	27	-66.7	326	158	H
			5.937375	-49.03	Pk	35.3	-34.72	11.8	0	-36.65	-27	-9.65	326	158	H
			5.85	-51.24	Pk	35	-34.97	11.8	0	-39.41	27	-66.41	338	129	V
			5.93455	-48.42	Pk	35.3	-34.75	11.8	0	-36.07	-27	-9.07	338	129	V

Pk - Peak detector

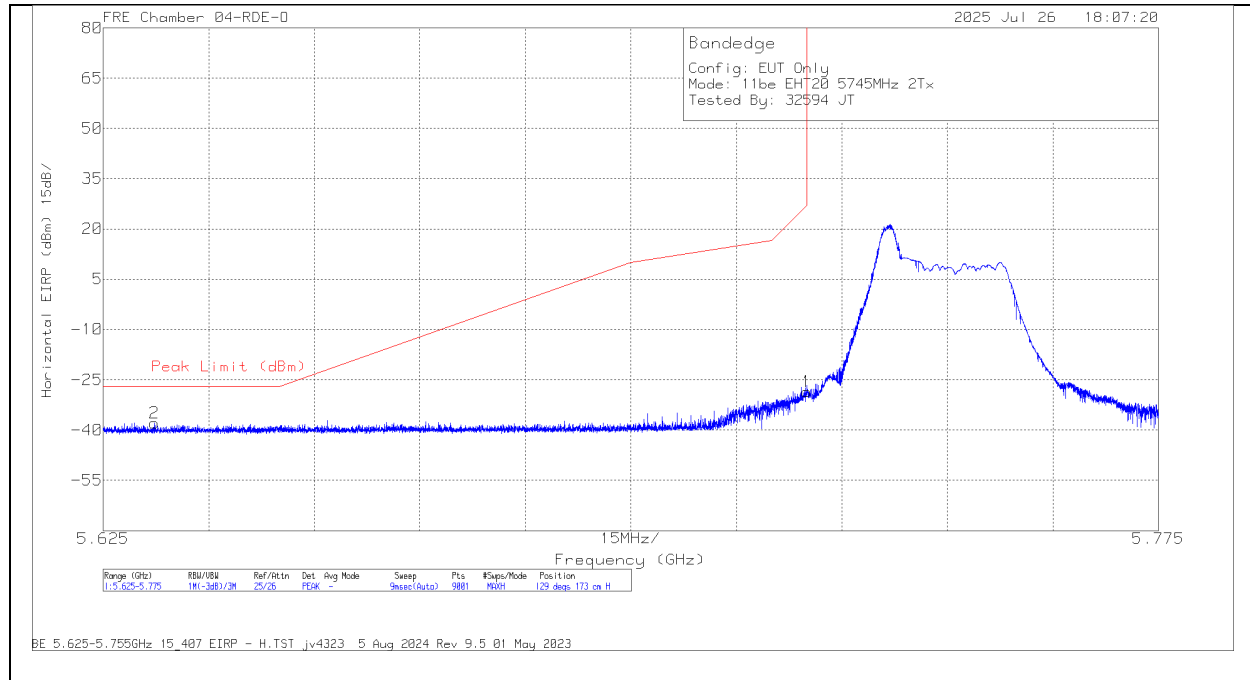2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26**BANDEDGE (LOW CHANNEL / 5745MHz)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63225	-49.72	Pk	34.3	11.8	0	-34.23	-37.85	-27	-10.85	129	173	H
1	5.725	-40.79	Pk	34.5	11.8	0	-34.1	-28.59	27	-55.59	129	173	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (LOW CHANNEL / 5745MHz)

VERTICAL RESULT

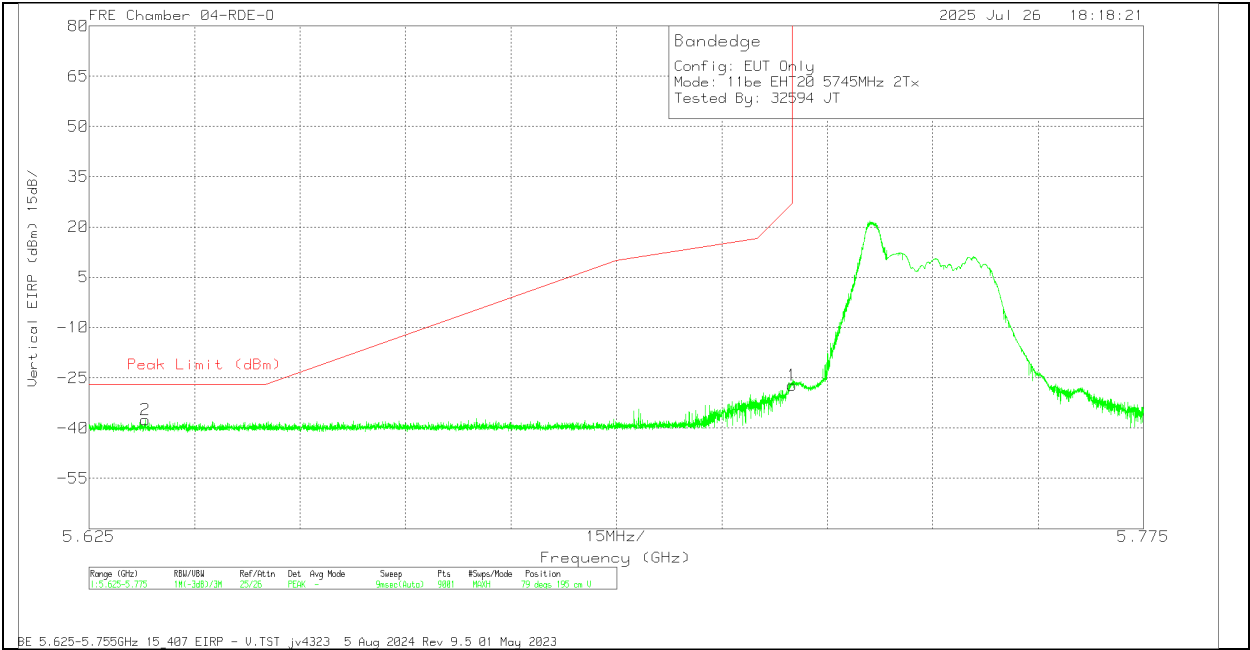


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.632967	-49.33	Pk	34.3	11.8	0	-34.22	-37.45	-27	-10.45	79	195	V
1	5.725	-39.4	Pk	34.5	11.8	0	-34.1	-27.2	27	-54.2	79	195	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

HORIZONTAL RESULT

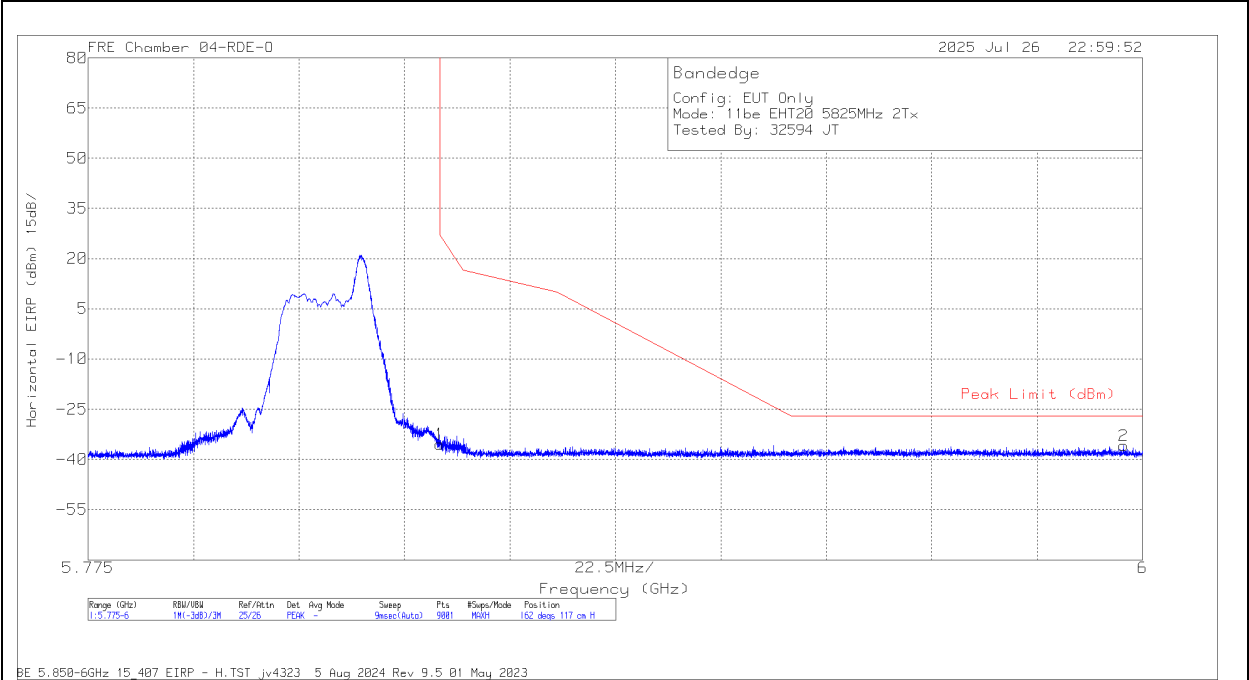


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.42	Pk	35	11.8	0	-33.85	-35.47	27	-62.47	162	117	H
2	5.995925	-49.23	Pk	35.2	11.8	0	-33.68	-35.91	-27	-8.91	162	117	H

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: PARTIAL RU, 26

BANDEDGE (HIGH CHANNEL / 5825MHz)

VERTICAL RESULT

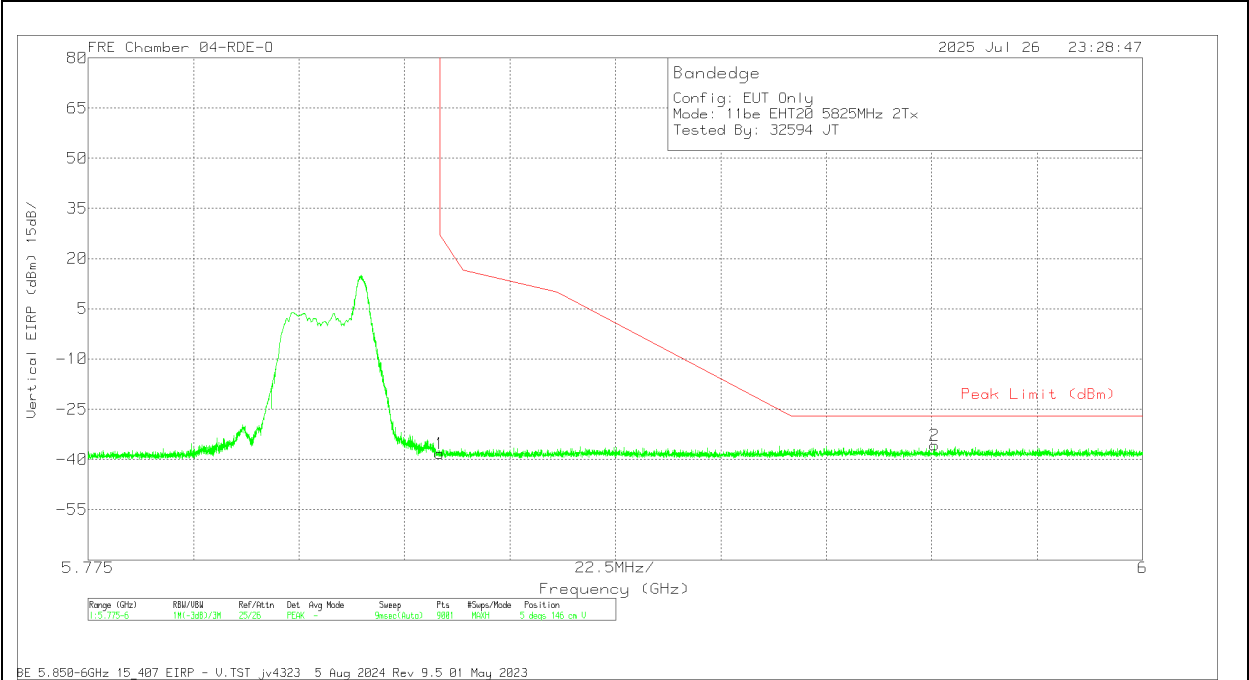

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.2	Pk	35	11.8	0	-33.85	-38.25	27	-65.25	5	146	V
2	5.95565	-49.15	Pk	35.2	11.8	0	-33.6	-35.75	-27	-8.75	5	146	V

Pk - Peak detector

1.1.31. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5745	6 + 5	* 11.718571	52.87	PK-U	38.4	-40.1	0	51.17	-	-	74	-22.83	0	101	H
			* 11.72447	52.4	PK-U	38.4	-40.4	0	50.4	-	-	74	-23.6	0	101	V
			* 11.728722	40.99	ADR	38.4	-40.5	0	38.89	54	-15.11	-	-	0	101	H
			* 11.729852	41.26	ADR	38.4	-40.5	0	39.16	54	-14.84	-	-	0	101	V
			* 3.767039	44.73	ADR	33.4	-45.8	0	32.33	54	-21.67	-	-	0	101	V
			* 3.767826	44.67	ADR	33.4	-45.6	0	32.47	54	-21.53	-	-	0	101	H
			* 3.776113	56.08	PK-U	33.4	-45.7	0	43.78	-	-	74	-30.22	0	101	V
			* 3.801873	56.53	PK-U	33.4	-45.8	0	44.13	-	-	74	-29.87	0	101	H
			* 8.095822	53.08	PK-U	35.9	-41.8	0	47.18	-	-	74	-26.82	0	101	H
			* 8.115195	53.34	PK-U	35.9	-41.9	0	47.34	-	-	74	-26.66	0	101	V
			* 8.121377	41.63	ADR	35.9	-41.5	0	36.03	54	-17.97	-	-	0	101	V
			* 8.127933	41.56	ADR	35.9	-41.8	0	35.66	54	-18.34	-	-	0	101	H
			* 12.129982	40.82	ADR	38.8	-40.2	0	39.42	54	-14.58	-	-	1	101	H
			* 12.153244	52.18	PK-U	38.9	-40.3	0	50.78	-	-	74	-23.22	1	101	H
			* 12.163532	40.78	ADR	38.9	-40.2	0	39.48	54	-14.52	-	-	1	101	V
	5785	6 + 5	* 12.165114	53	PK-U	38.9	-40.2	0	51.7	-	-	74	-22.3	1	101	V
			* 3.81348	44.85	ADR	33.4	-45.7	0	32.55	54	-21.45	-	-	1	101	V
			* 3.816301	56.11	PK-U	33.5	-45.8	0	43.81	-	-	74	-30.19	1	101	H
			* 3.818161	44.81	ADR	33.5	-45.6	0	32.71	54	-21.29	-	-	1	101	H
			* 3.83122	56.7	PK-U	33.5	-45.5	0	44.7	-	-	74	-29.3	1	101	V
			* 8.24208	53.25	PK-U	35.9	-42.2	0	46.95	-	-	74	-27.05	1	101	V
			* 8.246541	53.36	PK-U	35.9	-42.4	0	46.86	-	-	74	-27.14	1	101	H
			* 8.250506	41.73	ADR	35.9	-42.4	0	35.23	54	-18.77	-	-	1	101	H
			* 8.255053	41.88	ADR	35.9	-42.4	0	35.38	54	-18.62	-	-	1	101	V
			* 12.153815	52.36	PK-U	38.9	-40.1	0	51.16	-	-	74	-22.84	0	101	V
			* 12.170993	52.43	PK-U	38.9	-40	0	51.33	-	-	74	-22.67	0	101	H
			* 12.181215	40.85	ADR	38.9	-40.1	0	39.65	54	-14.35	-	-	0	101	V
			* 12.183815	41.08	ADR	38.9	-40.2	0	39.78	54	-14.22	-	-	0	101	H
			* 3.745142	56.32	PK-U	33.3	-45.8	0	43.82	-	-	74	-30.18	0	101	H
	5825	6 + 5	* 3.751196	56.5	PK-U	33.3	-45.7	0	44.1	-	-	74	-29.9	0	101	V
			* 3.761928	44.78	ADR	33.4	-45.6	0	32.58	54	-21.42	-	-	0	101	H
			* 3.771489	44.86	ADR	33.4	-45.7	0	32.56	54	-21.44	-	-	0	101	V
			* 8.356369	41.93	ADR	36	-42.4	0	35.53	54	-18.47	-	-	0	101	V
			* 8.361217	53.37	PK-U	36	-42.3	0	47.07	-	-	74	-26.93	0	101	H
			* 8.372782	53.46	PK-U	36	-42.3	0	47.16	-	-	74	-26.84	0	101	V
			* 8.375813	41.91	ADR	36	-42.2	0	35.71	54	-18.29	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5755	6 + 5	2.669588	60.24	PK-U	32.7	-49.54	0	43.4	-	-	74	-30.6	360	199	H
			2.668015	48.63	ADR	32.7	-49.53	0	31.8	54	-22.2	-	-	360	199	H
			2.656691	60.6	PK-U	32.6	-49.55	0	43.65	-	-	74	-30.35	360	101	V
			2.655931	48.56	ADR	32.6	-49.54	0	31.62	54	-22.38	-	-	360	101	V
			9.401486	56.71	PK-U	36.4	-45.53	0	47.58	-	-	74	-26.42	360	200	H
			9.409584	44.68	ADR	36.4	-45.71	0	35.37	54	-18.63	-	-	360	200	H
			14.029963	55.66	PK-U	39.1	-43.14	0	51.62	-	-	68.2	-16.58	360	200	H
			14.031958	44.21	ADR	39.1	-42.94	0	40.37	-	-	-	-	360	200	H
			9.439661	56.51	PK-U	36.5	-45.72	0	47.29	-	-	74	-26.71	360	101	V
			9.441234	44.76	ADR	36.5	-45.68	0	35.58	54	-18.42	-	-	360	101	V
			14.044987	55.81	PK-U	39.1	-42.93	0	51.98	-	-	68.2	-16.22	360	200	V
			14.024361	44.32	ADR	39.1	-43.28	0	40.14	-	-	-	-	360	200	V
	5795	6 + 5	* 2.206398	34.19	ADR	31.4	-26.54	0	39.05	54	-14.95	-	-	19	332	V
			* 11.417316	56.06	PK-U	38.2	-44.7	0	49.56	-	-	74	-24.44	322	192	H
			* 11.423077	44.79	ADR	38.3	-44.76	0	38.33	54	-15.67	-	-	322	192	H
			* 11.420034	57.47	PK-U	38.3	-44.69	0	51.08	-	-	74	-22.92	24	216	V
			* 11.424517	44.78	ADR	38.3	-44.79	0	38.29	54	-15.71	-	-	24	216	V
			2.177	45.5	PK-U	31.4	-26.63	0	50.27	-	-	68.2	-17.93	206	289	H
			2.192036	45.73	PK-U	31.4	-26.62	0	50.51	-	-	68.2	-17.69	19	332	V
			2.192616	34.25	ADR	31.4	-26.63	0	39.02	-	-	-	-	206	289	H
			8.571146	57.21	PK-U	36	-45.65	0	47.56	-	-	68.2	-20.64	154	382	V
			8.580007	45.41	ADR	36	-45.68	0	35.73	-	-	-	-	154	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz



UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n/ac (Highest Power)	5775	6 + 5	* 2.827146	56.8	PK-U	32.2	-47.57	0	41.43	-	-	74	-32.57	0	101	V
			* 2.82904	45.19	ADR	32.2	-47.56	0	29.83	54	-24.17	-	-	0	101	V
			* 9.319043	56.86	PK-U	36.6	-44.67	0	48.79	-	-	74	-25.21	0	101	H
			* 9.322511	45.31	ADR	36.6	-44.74	0	37.17	54	-16.83	-	-	0	101	H
			* 10.9753	55.6	PK-U	37.9	-43.3	0	50.2	-	-	74	-23.8	0	101	V
			* 10.974313	44.07	ADR	37.9	-43.31	0	38.66	54	-15.34	-	-	0	101	V
			2.195632	47.31	ADR	31.3	-48.84	0	29.77	-	-	-	-	0	101	H
			2.198911	59.03	PK-U	31.3	-48.82	0	41.51	-	-	68.2	-26.69	0	101	H
			2.452805	58.63	PK-U	32.3	-48.8	0	42.13	-	-	68.2	-26.07	0	101	H
			2.452877	46.94	ADR	32.3	-48.8	0	30.44	-	-	-	-	0	101	H
			10.101829	44.76	ADR	37.4	-43.85	0	38.31	-	-	-	-	0	199	V
			10.103002	56.65	PK-U	37.4	-43.89	0	50.16	-	-	68.2	-18.04	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHz)

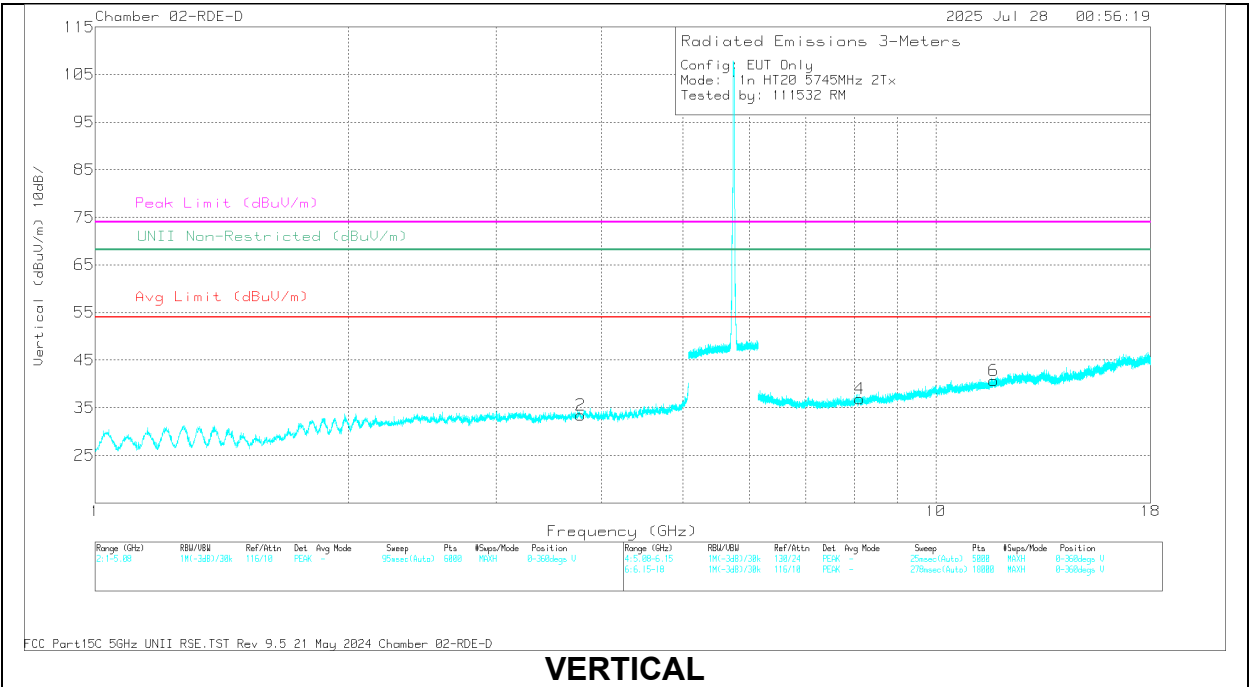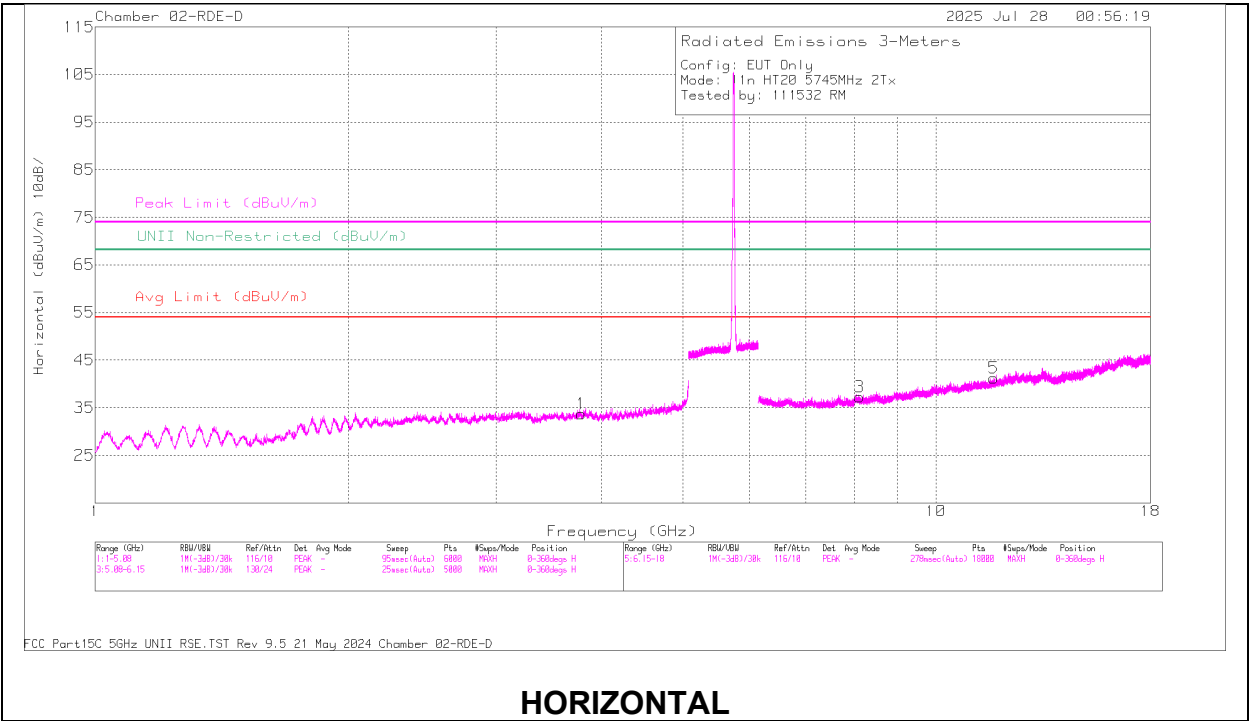

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.718571	52.87	PK-U	38.4	-40.1	0	51.17	-	-	74	-22.83	0	101	H
1	* 11.72447	52.4	PK-U	38.4	-40.4	0	50.4	-	-	74	-23.6	0	101	V
2	* 11.728722	40.99	ADR	38.4	-40.5	0	38.89	54	-15.11	-	-	0	101	H
2	* 11.729852	41.26	ADR	38.4	-40.5	0	39.16	54	-14.84	-	-	0	101	V
3	* 3.767039	44.73	ADR	33.4	-45.8	0	32.33	54	-21.67	-	-	0	101	V
3	* 3.767826	44.67	ADR	33.4	-45.6	0	32.47	54	-21.53	-	-	0	101	H
4	* 3.776113	56.08	PK-U	33.4	-45.7	0	43.78	-	-	74	-30.22	0	101	V
4	* 3.801873	56.53	PK-U	33.4	-45.8	0	44.13	-	-	74	-29.87	0	101	H
5	* 8.095822	53.08	PK-U	35.9	-41.8	0	47.18	-	-	74	-26.82	0	101	H
5	* 8.115195	53.34	PK-U	35.9	-41.9	0	47.34	-	-	74	-26.66	0	101	V
6	* 8.121377	41.63	ADR	35.9	-41.5	0	36.03	54	-17.97	-	-	0	101	V
6	* 8.127933	41.56	ADR	35.9	-41.8	0	35.66	54	-18.34	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.32. 802.11be MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5745	6 + 5	* 2.275181	57.96	PK-U	31.6	-48.94	0	40.62	-	-	74	-33.38	1	199	H
			* 2.274477	46.74	ADR	31.6	-48.95	0	29.39	54	-24.61	-	-	1	199	H
			2.113898	46.1	ADR	31.2	-48.53	0	28.77	-	-	-	-	1	101	H
			2.11465	57.77	PK-U	31.2	-48.53	0	40.44	-	-	68.2	-27.76	1	101	H
			2.575112	57.14	PK-U	32.4	-48.32	0	41.22	-	-	68.2	-26.98	1	199	V
			2.577376	45.74	ADR	32.4	-48.32	0	29.82	-	-	-	-	1	199	V
			8.833864	56.14	PK-U	36.2	-43.75	0	48.59	-	-	68.2	-19.61	1	199	H
			8.834891	44.54	ADR	36.2	-43.77	0	36.97	-	-	-	-	1	199	H
			9.530634	56.8	PK-U	36.8	-45.34	0	48.26	-	-	68.2	-19.94	1	101	V
			9.533012	45.1	ADR	36.8	-45.33	0	36.57	-	-	-	-	1	101	V
			10.159022	56.37	PK-U	37.5	-43.23	0	50.64	-	-	68.2	-17.56	1	200	V
			10.159205	44.63	ADR	37.5	-43.24	0	38.89	-	-	-	-	1	200	V
	5785	6 + 5	* 2.2664	58.46	PK-U	31.5	-48.98	0	40.98	-	-	74	-33.02	0	101	H
			* 2.266153	47.02	ADR	31.5	-48.99	0	29.53	54	-24.47	-	-	0	101	H
			* 2.783377	57.54	PK-U	32.3	-47.74	0	42.1	-	-	74	-31.9	0	101	V
			* 2.78167	45.74	ADR	32.3	-47.75	0	30.29	54	-23.71	-	-	0	101	V
			* 11.106461	55.59	PK-U	38	-43.2	0	50.39	-	-	74	-23.61	0	199	V
			* 11.103666	44.14	ADR	38	-43.2	0	38.94	54	-15.06	-	-	0	199	V
			2.524133	46.03	ADR	32.3	-48.3	0	30.03	-	-	-	-	0	199	H
			2.524477	57.43	PK-U	32.3	-48.3	0	41.43	-	-	68.2	-26.77	0	199	H
			9.588699	56.79	PK-U	36.9	-44.83	0	48.86	-	-	68.2	-19.34	0	101	H
			9.590653	45.44	ADR	36.9	-44.8	0	37.54	-	-	-	-	0	101	H
			10.377576	44.8	ADR	37.6	-44.21	0	38.19	-	-	-	-	0	101	V
			10.380028	56.43	PK-U	37.6	-44.24	0	49.79	-	-	68.2	-18.41	0	101	V
	5825	6 + 5	* 2.327679	58.71	PK-U	31.8	-48.83	0	41.68	-	-	74	-32.32	0	101	H
			* 2.326389	47.24	ADR	31.8	-48.82	0	30.22	54	-23.78	-	-	0	101	H
			* 2.322625	58.68	PK-U	31.8	-48.84	0	41.64	-	-	74	-32.36	0	101	V
			* 2.320842	47.04	ADR	31.8	-48.86	0	29.98	54	-24.02	-	-	0	101	V
			* 13.325495	57.39	PK-U	39.6	-44.45	0	52.54	-	-	74	-21.46	0	101	H
			* 13.327261	45.58	ADR	39.6	-44.46	0	40.72	54	-13.28	-	-	0	101	H
			* 13.332645	57.51	PK-U	39.6	-44.53	0	52.58	-	-	74	-21.42	0	101	V
			* 13.329372	45.75	ADR	39.6	-44.48	0	40.87	54	-13.13	-	-	0	101	V
			3.319619	43.74	ADR	32.9	-45.97	0	30.67	-	-	-	-	0	101	V
			3.320209	55.52	PK-U	32.9	-45.97	0	42.45	-	-	68.2	-25.75	0	101	H
			3.320433	43.74	ADR	32.9	-45.97	0	30.67	-	-	-	-	0	101	H
			3.321607	56.25	PK-U	32.9	-45.98	0	43.17	-	-	68.2	-25.03	0	101	V
11be (26T / Highest PSD)	5745 (Low index)	6 + 5	* 9.005665	32.8	PK-U	36.1	-18.3	0	50.6	-	-	74	-23.4	0	114	V
			* 9.006387	20.85	ADR	36.1	-18.3	0	38.65	54	-15.35	-	-	0	114	V
			2.987377	26.65	ADR	32.7	-29.6	0	29.75	-	-	-	-	106	399	V
			2.991002	37.83	PK-U	32.7	-29.6	0	40.93	-	-	68.2	-27.27	106	399	V
			3.032438	23.86	ADR	33.6	-29.6	0	27.86	-	-	-	-	259	372	H
			3.033438	35.06	PK-U	33.6	-29.6	0	39.06	-	-	68.2	-29.14	259	372	H
			10.375606	20.9	ADR	37.5	-17.1	0	41.3	-	-	-	-	84	107	H
			10.375656	32.18	PK-U	37.5	-17.1	0	52.58	-	-	68.2	-15.62	84	107	H
			13.171342	20.8	ADR	38.8	-18.4	0	41.2	-	-	-	-	43	260	V
			13.17171	32.85	PK-U	38.8	-18.4	0	53.25	-	-	68.2	-14.95	43	260	V
			13.682494	33.65	PK-U	39	-18.3	0	54.35	-	-	68.2	-13.85	305	237	H
			13.684253	21.96	ADR	39	-18.3	0	42.66	-	-	-	-	305	237	H
	5785 (Mid Index)	6 + 5	2.168154	61.71	PK-U	31.7	-50.37	0	43.04	-	-	68.2	-25.16	282	245	H
			2.168279	49.43	ADR	31.7	-50.36	0	30.77	-	-	-	-	282	245	H
			2.879044	59.76	PK-U	32.6	-49.16	0	43.2	-	-	74	-30.8	151	351	V
			2.876531	47.92	ADR	32.6	-49.16	0	31.36	54	-22.64	-	-	151	351	V
			2.878378	59.32	PK-U	32.6	-49.15	0	42.77	-	-	74	-31.23	151	351	V
			2.873524	47.89	ADR	32.6	-49.2	0	31.29	54	-22.71	-	-	151	351	V
			2.900058	60.12	PK-U	32.7	-49.2	0	43.62	-	-	68.2	-24.58	151	351	V
			2.884284	47.86	ADR	32.6	-49.25	0	31.21	54	-22.79	-	-	151	351	V
			17.375693	53.99	PK-U	41.4	-40.75	0	54.64	-	-	68.2	-13.56	328	321	H
			17.380395	42.57	ADR	41.4	-40.77	0	43.2	-	-	-	-	328	321	H
			17.377177	54.5	PK-U	41.4	-40.79	0	55.11	-	-	68.2	-13.09	328	321	H
			17.379586	43.12	ADR	41.4	-40.76	0	43.76	-	-	-	-	328	321	H
	5825 (High Index)	6 + 5	11.579518	55.98	PK-U	38.3	-44.01	0	50.27	-	-	74	-23.73	10	343	V
			11.579114	43.85	ADR	38.3	-44.03	0	38.12	54	-15.88	-	-	10	343	V
			17.381258	54.16	PK-U	41.4	-40.81	0	54.75	-	-	68.2	-13.45	62	305	V
			17.375254	43.09	ADR	41.4	-40.72	0	43.77	-	-	-	-	62	305	V
			1.953381	61.36	PK-U	31.4	-50.14	0	42.62	-	-	68.2	-25.58	198	197	H
			1.945256	50.11	ADR	31.5	-50.2	0	31.41	-	-	-	-	198	197	H
			2.896838	59	PK-U	32.7	-49.2	0	42.5	-	-	74	-31.5	62	272	V
			2.888358	47.65	ADR	32.6	-49.24	0	31.01	54	-22.99	-	-	62	272	V
			11.655496	55.55	PK-U	38.5	-44.27	0	49.78	-	-	74	-24.22	343	338	H
			11.660376	43.63	ADR	38.5	-44.32	0	37.81	54	-16.19	-	-	343	338	H
			11.650505	55.96	PK-U	38.5	-44.13	0	50.33	-	-	74	-23.67	343	338	H
			11.670332	43.91	ADR	38.5	-44.4	0	38.01	54	-15.99	-	-	343	338	H
			17.490079	53.4	PK-U	41.4	-40.03	0	54.77	-	-	68.2	-13.43	70	296	H
			17.496248	41.6	ADR	41.4	-40.15	0	42.85	-	-	-	-	70	296	H
			17.494137	53.2	PK-U	41.4	-40.2	0	54.4	-	-	68.2	-13.8	70	296	H
			17.494911	41.65	ADR	41.4	-40.22	0	42.83	-	-	-	-	70	296	H
			11.668899	55.8	PK-U	38.5	-44.39	0	49.91	-	-	74	-24.09	59	313	V
			11.665432	43.91	ADR	38.5	-44.34	0	38.07	54	-15.93	-	-	59	313	V
			17.483046	53.16	PK-U	41.4	-39.86	0	54.7	-	-	68.2	-13.5	286	311	V
			17.508024	41.68	ADR	41.4	-40.06	0	43.02	-	-	-	-	286	311	V
			17.489122	53.35	PK-U	41.4	-39.99	0	54.76	-	-	68.2	-13.44	286	311	V
			17.497117	41.65	ADR	41.4	-40.18	0	42.87	-	-	-	-	286	311	V

40MHz

UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5755	6 + 5	* 3.602896	34.75	PK-U	33	0	-29.2	38.55	-	-	74	-35.45	101	127	H
			* 3.600759	23.29	ADR	33	0	-29.2	27.09	54	-26.91	-	-	101	127	H
			* 3.585844	32.61	PK-U	32.9	0	-29	36.51	-	-	74	-37.49	115	301	V
			* 3.584825	21.29	ADR	32.9	0	-29	25.19	54	-28.81	-	-	115	301	V
			* 7.293185	32.71	PK-U	35.6	0	-19.7	48.61	-	-	74	-25.39	30	345	H
			* 7.29422	21.16	ADR	35.6	0	-19.7	37.06	54	-16.94	-	-	30	345	H
			* 7.271596	32.47	PK-U	35.6	0	-19.5	48.57	-	-	74	-25.43	10	239	V
			* 7.269865	20.9	ADR	35.6	0	-19.5	37	54	-17	-	-	10	239	V
			10.309827	20.97	ADR	37.4	0	-17.6	40.77	-	-	-	-	40	212	H
			10.310355	32.26	PK-U	37.4	0	-17.6	52.06	-	-	68.2	-16.14	40	212	H
			10.322661	31.85	PK-U	37.4	0	-17.3	51.95	-	-	68.2	-16.25	213	212	V
			10.324136	20.76	ADR	37.4	0	-17.3	40.86	-	-	-	-	213	212	V
	5795	6 + 5	* 3.675783	34.27	PK-U	33.1	0	-28.5	38.87	-	-	74	-35.13	303	244	H
			* 3.676528	21.7	ADR	33.1	0	-28.5	26.3	54	-27.7	-	-	303	244	H
			* 3.658809	33.95	PK-U	33.2	0	-28.8	38.35	-	-	74	-35.65	225	142	V
			* 3.658445	22.11	ADR	33.2	0	-28.8	26.51	54	-27.49	-	-	225	142	V
			7.894103	20.78	ADR	35.8	0	-20.3	36.28	-	-	-	-	130	227	V
			7.895551	32.52	PK-U	35.8	0	-20.3	48.02	-	-	68.2	-20.18	130	227	V
			7.898588	21.11	ADR	35.8	0	-20.2	36.71	-	-	-	-	218	353	H
			7.901392	32.49	PK-U	35.8	0	-20.3	47.99	-	-	68.2	-20.21	218	353	H
			10.21974	32.03	PK-U	37.4	0	-17.3	52.13	-	-	68.2	-16.07	143	354	V
			10.220353	20.8	ADR	37.4	0	-17.3	40.9	-	-	-	-	143	354	V
			10.25285	20.9	ADR	37.4	0	-17.8	40.5	-	-	-	-	238	165	H
			10.254931	32.8	PK-U	37.4	0	-17.8	52.4	-	-	68.2	-15.8	238	165	H
11be (106T / Highest PSD)	5755 (Low Index)	6 + 5	2.391659	33.99	PK-U	31.8	0	-30.8	34.99	-	-	68.2	-33.21	63	125	V
			2.392834	22.42	ADR	31.8	0.15	-30.8	23.56	-	-	-	-	63	125	V
			3.149837	29.71	PK-U	33	0	-29.3	33.41	-	-	68.2	-34.79	312	307	H
			3.151268	17.98	ADR	33	0.15	-29.3	21.82	-	-	-	-	312	307	H
			7.94107	20.86	ADR	35.9	0.15	-19.9	37	-	-	-	-	105	201	V
			7.942422	32.64	PK-U	35.9	0	-19.9	48.64	-	-	68.2	-19.56	105	201	V
			7.94249	20.89	ADR	35.9	0.15	-19.9	37.03	-	-	-	-	105	201	V
			7.942526	32.18	PK-U	35.9	0	-20	48.08	-	-	68.2	-20.12	105	201	V
			8.819131	31.61	PK-U	36.1	0	-19.1	48.61	-	-	68.2	-19.59	341	183	H
			8.820214	20.44	ADR	36.1	0.15	-19.1	37.58	-	-	-	-	341	183	H
			13.611615	34.62	PK-U	39.1	0	-18.4	55.32	-	-	68.2	-12.88	35	101	V
			13.613842	22.03	ADR	39.1	0.15	-18.4	42.87	-	-	-	-	35	101	V
	5795 (High Index)	6 + 5	* 3.677605	36.44	PK-U	33.1	0	-28.4	41.14	-	-	74	-32.86	11	189	H
			* 3.676876	24.64	ADR	33.1	0.15	-28.5	29.38	54	-24.62	-	-	11	189	H
			* 9.185283	32.32	PK-U	36.2	0	-18.3	50.22	-	-	74	-23.78	222	152	H
			* 9.18479	20.71	ADR	36.2	0.15	-18.3	38.75	54	-15.25	-	-	222	152	H
			3.41951	34.4	PK-U	32.6	0	-29.1	37.9	-	-	68.2	-30.3	352	284	V
			3.420318	23.07	ADR	32.6	0.15	-29.1	26.71	-	-	-	-	352	284	V
			8.956994	21.06	ADR	36.1	0.15	-18.5	38.8	-	-	-	-	279	249	V
			8.958872	32.64	PK-U	36.1	0	-18.5	50.24	-	-	68.2	-17.96	279	249	V
			10.335691	20.77	ADR	37.4	0.15	-17.3	41.01	-	-	-	-	22	168	V
			10.338084	32.25	PK-U	37.4	0	-17.3	52.35	-	-	68.2	-15.85	22	168	V
			13.604859	33.64	PK-U	39.1	0	-18.5	54.24	-	-	68.2	-13.96	108	216	H
			13.605343	22.07	ADR	39.1	0.15	-18.5	42.81	-	-	-	-	108	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz



UNII-3	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5775	6 + 5	2.954273	57.82	PK-U	32.5	0	-46.83	43.49	-	-	68.2	-24.71	360	101	H
			2.95277	45.31	ADR	32.5	0	-46.72	31.09	-	-	-	-	360	101	H
			2.956065	57.08	PK-U	32.5	0	-46.79	42.79	-	-	68.2	-25.41	360	101	V
			2.954913	45.64	ADR	32.5	0	-46.89	31.25	-	-	-	-	360	101	V
			* 9.357143	54.37	PK-U	36.2	0	-42.7	47.87	-	-	74	-26.13	360	101	H
			* 9.356968	42.94	ADR	36.2	0	-42.7	36.44	54	-17.56	-	-	360	101	H
			13.913095	54.04	PK-U	39	0	-42.3	50.74	-	-	68.2	-17.46	360	101	H
			13.912232	42.78	ADR	39	0	-42.3	39.48	-	-	-	-	360	101	H
			* 9.354909	54.28	PK-U	36.2	0	-42.7	47.78	-	-	74	-26.22	360	101	V
			* 9.35677	42.62	ADR	36.2	0	-42.7	36.12	54	-17.88	-	-	360	101	V
			13.915253	54.68	PK-U	39	0	-42.2	51.48	-	-	68.2	-16.72	360	101	V
			13.916331	42.78	ADR	39	0	-42.2	39.58	-	-	-	-	360	101	V
11be (484T / Highest PSD)	5775 (High Index)	6 + 5	1.788402	61.07	PK-U	29.9	0	-49.16	41.81	-	-	68.2	-26.39	360	201	V
			1.790289	49.46	ADR	29.9	0	-49.14	30.22	-	-	-	-	360	201	V
			1.795342	49.48	ADR	30	0	-49.16	30.32	-	-	-	-	360	100	H
			1.796849	61.41	PK-U	30	0	-49.15	42.26	-	-	68.2	-25.94	360	100	H
			10.049612	59.53	PK-U	37.3	0	-46.6	50.23	-	-	68.2	-17.97	360	201	V
			10.053547	59.34	PK-U	37.3	0	-46.69	49.95	-	-	68.2	-18.25	360	100	H
			10.055825	47.41	ADR	37.3	0	-46.72	37.99	-	-	-	-	360	201	V
			10.081627	47.7	ADR	37.3	0	-46.7	38.3	-	-	-	-	360	100	H
			11.787436	44.57	ADR	38.5	0	-43.27	39.8	54	-14.2	-	-	360	200	V
			11.803311	55.91	PK-U	38.6	0	-43.39	51.12	-	-	74	-22.88	360	200	V
			11.838318	44.91	ADR	38.6	0	-43.21	40.3	54	-13.7	-	-	360	100	H
			11.84146	56.85	PK-U	38.6	0	-43.28	52.17	-	-	74	-21.83	360	100	H
11be (106T / Highest PSD)	5775 (High Index)	6 + 5	1.94122	49.75	ADR	31.1	0.13	-49.16	31.8	-	-	-	-	360	100	H
			1.944479	49.65	ADR	31.1	0.13	-49.22	31.64	-	-	-	-	360	201	V
			1.944633	61.48	PK-U	31.1	0	-49.21	43.37	-	-	68.2	-24.83	360	100	H
			1.949225	61.1	PK-U	31.1	0	-49.2	43	-	-	68.2	-25.2	360	201	V
			11.822321	56.77	PK-U	38.6	0	-43.24	52.13	-	-	74	-21.87	360	100	H
			11.838157	44.9	ADR	38.6	0.13	-43.22	40.39	54	-13.59	-	-	360	100	H
			11.841781	44.84	ADR	38.6	0.13	-43.27	40.28	54	-13.7	-	-	360	201	V
			11.842603	56.89	PK-U	38.6	0	-43.28	52.21	-	-	74	-21.79	360	201	V
			17.459705	58.15	PK-U	41.6	0	-42.03	57.72	-	-	68.2	-10.48	360	100	H
			17.466083	46.05	ADR	41.6	0.13	-41.93	45.83	-	-	-	-	360	100	H
			17.475504	58.06	PK-U	41.6	0	-41.79	57.87	-	-	68.2	-10.33	360	200	V
			17.476242	46.28	ADR	41.6	0.13	-41.77	46.22	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5745MHz)

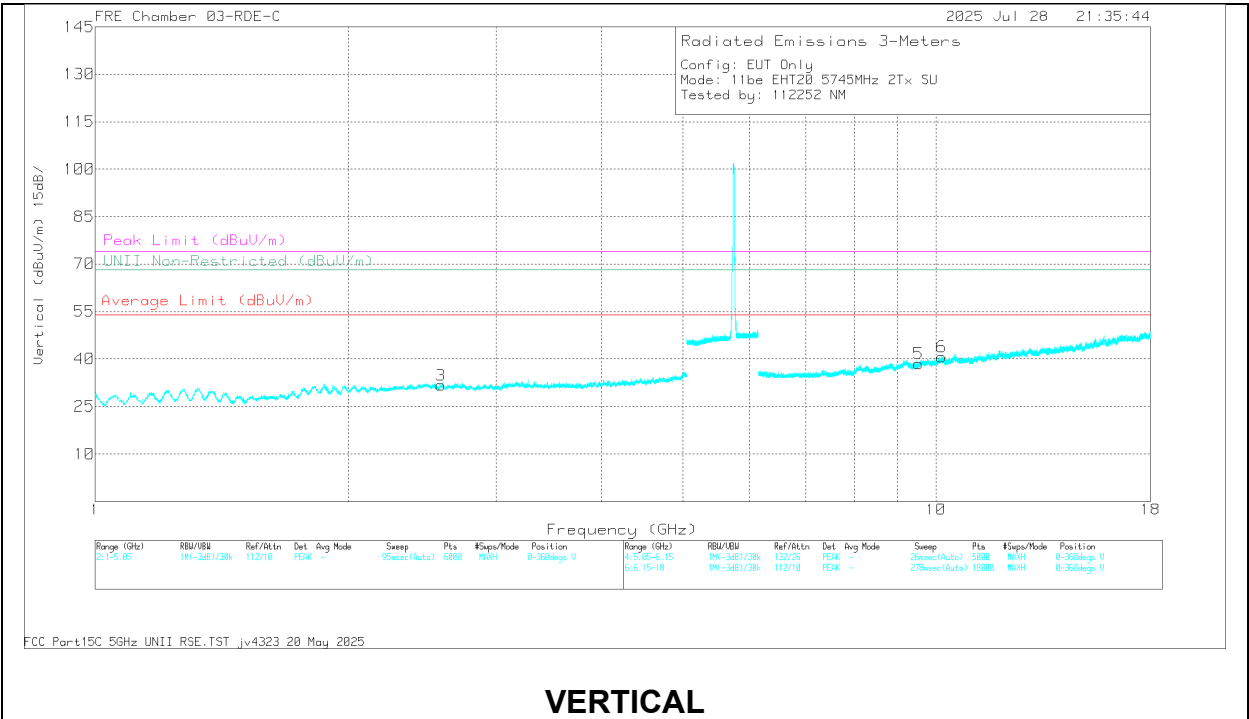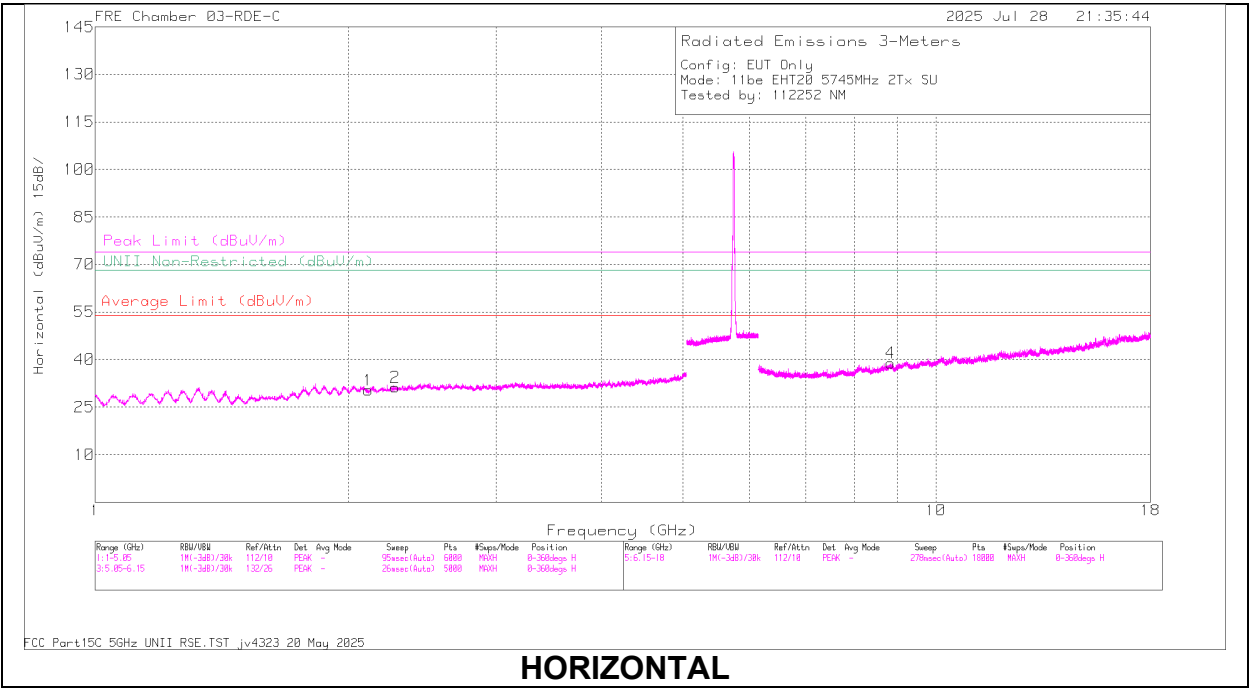

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.275181	57.96	PK-U	31.6	0	-48.94	40.62	-	-	74	-33.38	1	199	H
* 2.274477	46.74	ADR	31.6	0	-48.95	29.39	54	-24.61	-	-	1	199	H
2.113898	46.1	ADR	31.2	0	-48.53	28.77	-	-	-	-	1	101	H
2.11465	57.77	PK-U	31.2	0	-48.53	40.44	-	-	68.2	-27.76	1	101	H
2.575112	57.14	PK-U	32.4	0	-48.32	41.22	-	-	68.2	-26.98	1	199	V
2.577376	45.74	ADR	32.4	0	-48.32	29.82	-	-	-	-	1	199	V
8.833864	56.14	PK-U	36.2	0	-43.75	48.69	-	-	68.2	-19.61	1	199	H
8.834891	44.54	ADR	36.2	0	-43.77	36.97	-	-	-	-	1	199	H
9.530634	56.8	PK-U	36.8	0	-45.34	48.26	-	-	68.2	-19.94	1	101	V
9.533012	45.1	ADR	36.8	0	-45.33	36.57	-	-	-	-	1	101	V
10.159022	56.37	PK-U	37.5	0	-43.23	50.64	-	-	68.2	-17.56	1	200	V
10.159205	44.63	ADR	37.5	0	-43.24	38.89	-	-	-	-	1	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

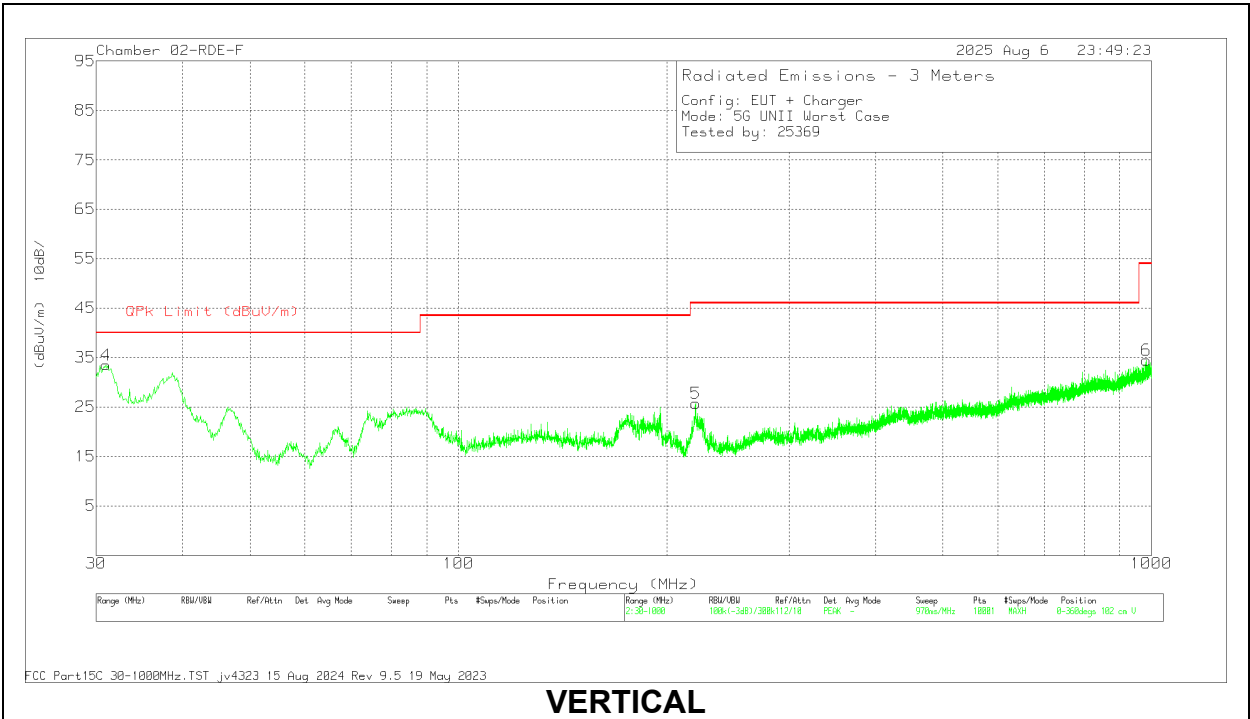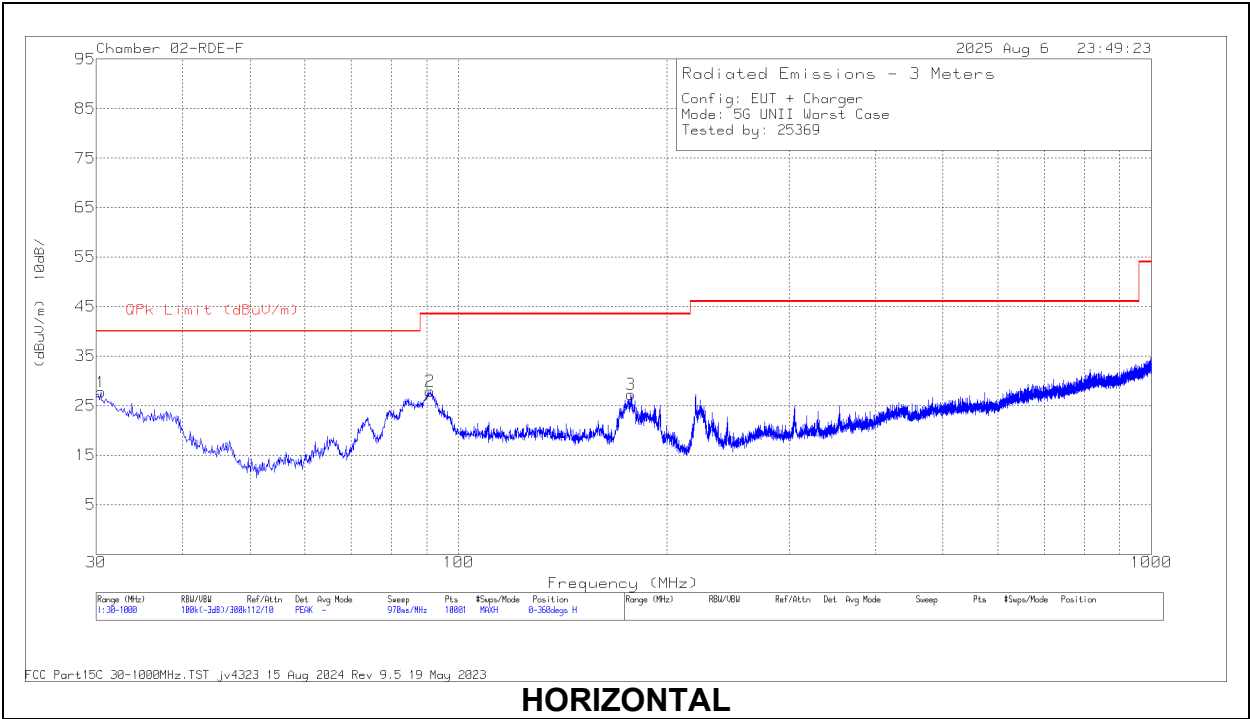



Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	202301 ACF (dB/m)	CBL/AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 983.898	32.1	Pk	28.8	-26.4	34.5	53.97	-19.47	0-360	102	V
1	30.485	32.61	Pk	26.6	-31.5	27.71	40	-12.29	0-360	199	H
4	30.97	38.82	Pk	26.3	-31.6	33.52	40	-6.48	0-360	102	V
4	31.1111	34.47	Qp	26.2	-31.6	29.07	40	-10.93	255	112	V
2	91.013	44.77	Pk	13.9	-30.8	27.87	43.52	-15.65	0-360	199	H
3	177.343	40.69	Pk	17.2	-30.6	27.29	43.52	-16.23	0-360	102	H
5	220.023	39.77	Pk	16.6	-30.6	25.77	46.02	-20.25	0-360	199	V

Qp - Quasi-Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

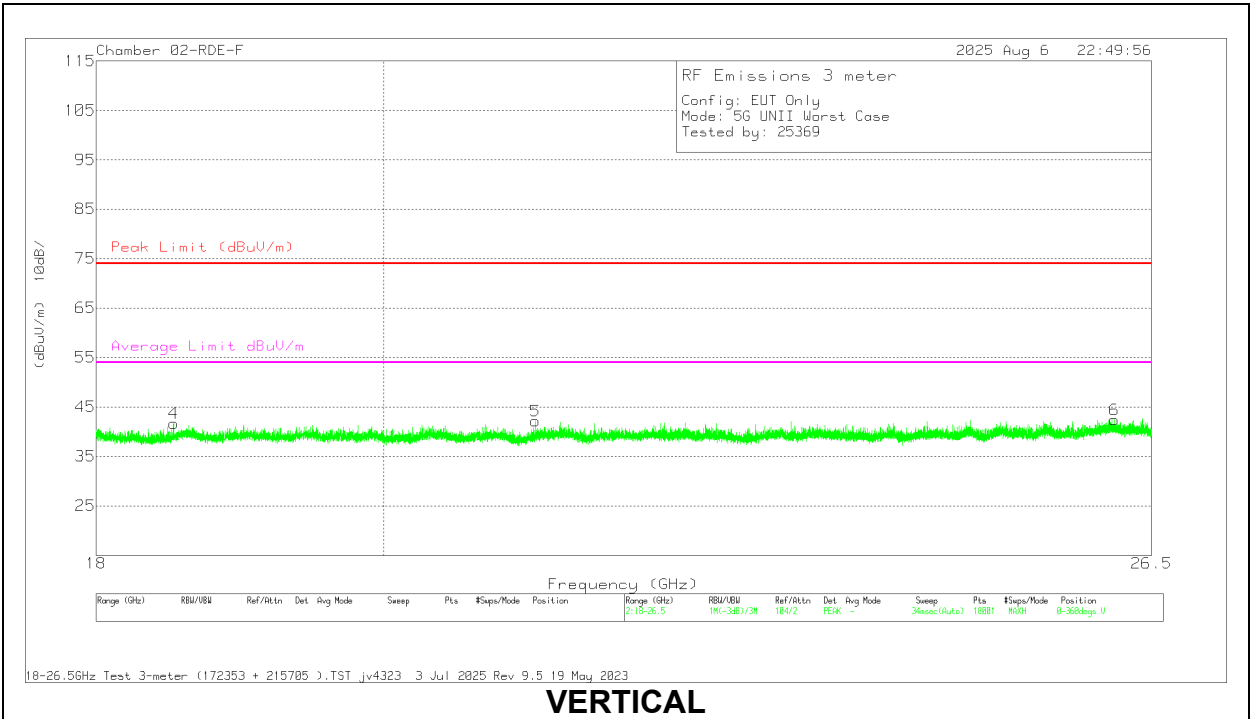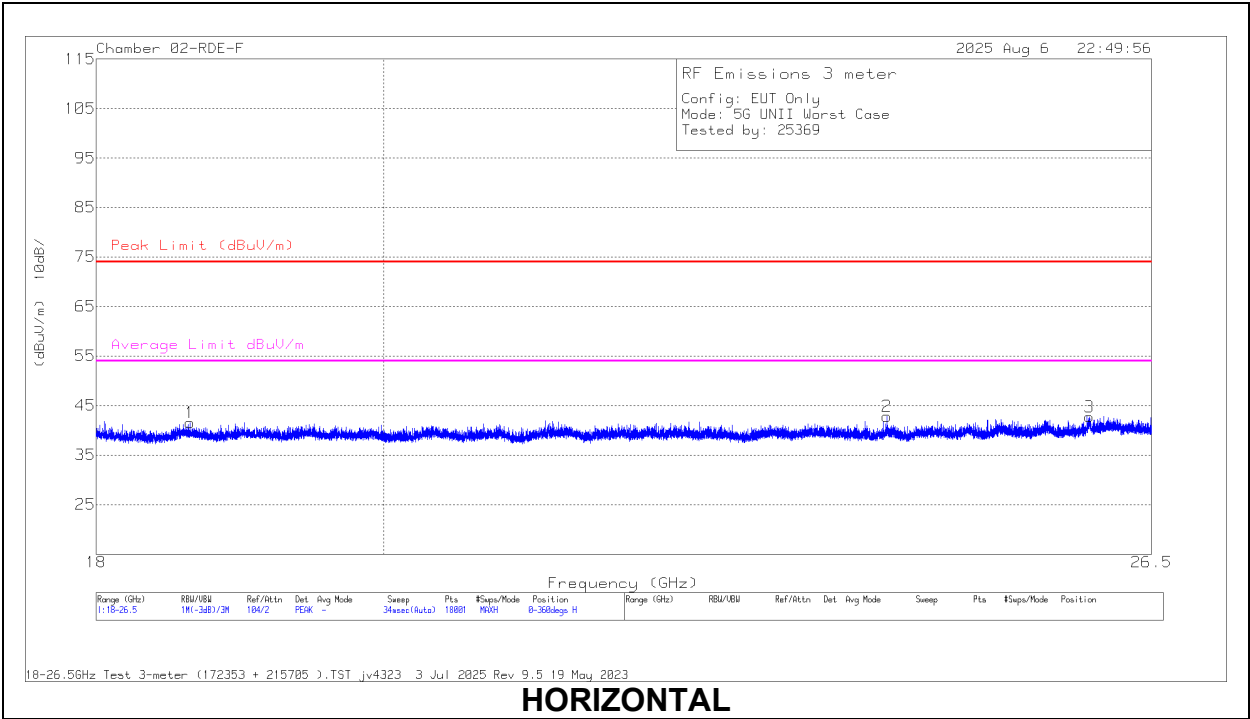

18 – 26GHz Data



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172353 ACF (dB/m)	CBL AMP (dB)	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.630889	53.04	Pk	32.2	-61.1	17.4	41.54	74	-32.46	-	-	0-360	101	H
4	* 18.517083	53.39	Pk	32.2	-61.2	17.3	41.69	74	-32.31	-	-	0-360	200	V
5	* 21.14311	51.04	Pk	32.7	-60.1	18.5	42.14	74	-31.86	-	-	0-360	101	V
2	24.051997	51.19	Pk	33.4	-61.7	19.9	42.79	74	-31.21	-	-	0-360	200	H
3	25.901691	49.56	Pk	33.9	-61.3	20.6	42.76	74	-31.24	-	-	0-360	200	H
6	26.140635	48.79	Pk	34	-61.1	20.7	42.39	74	-31.61	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

1.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)

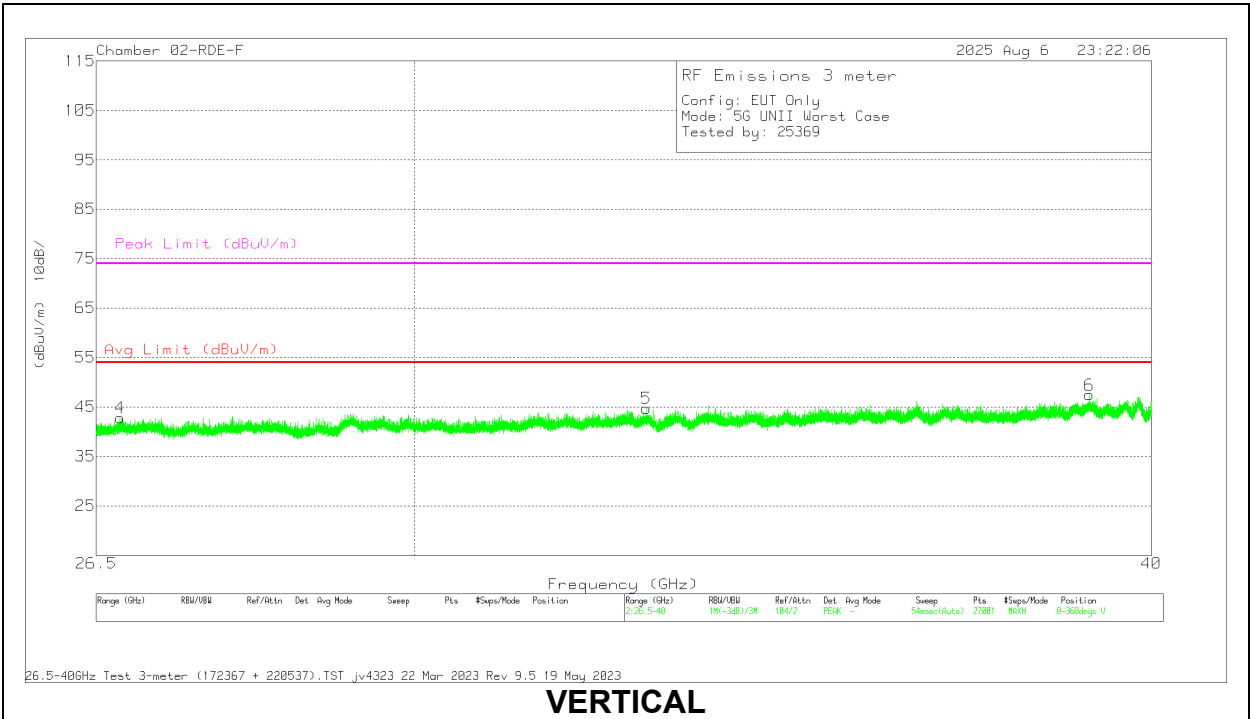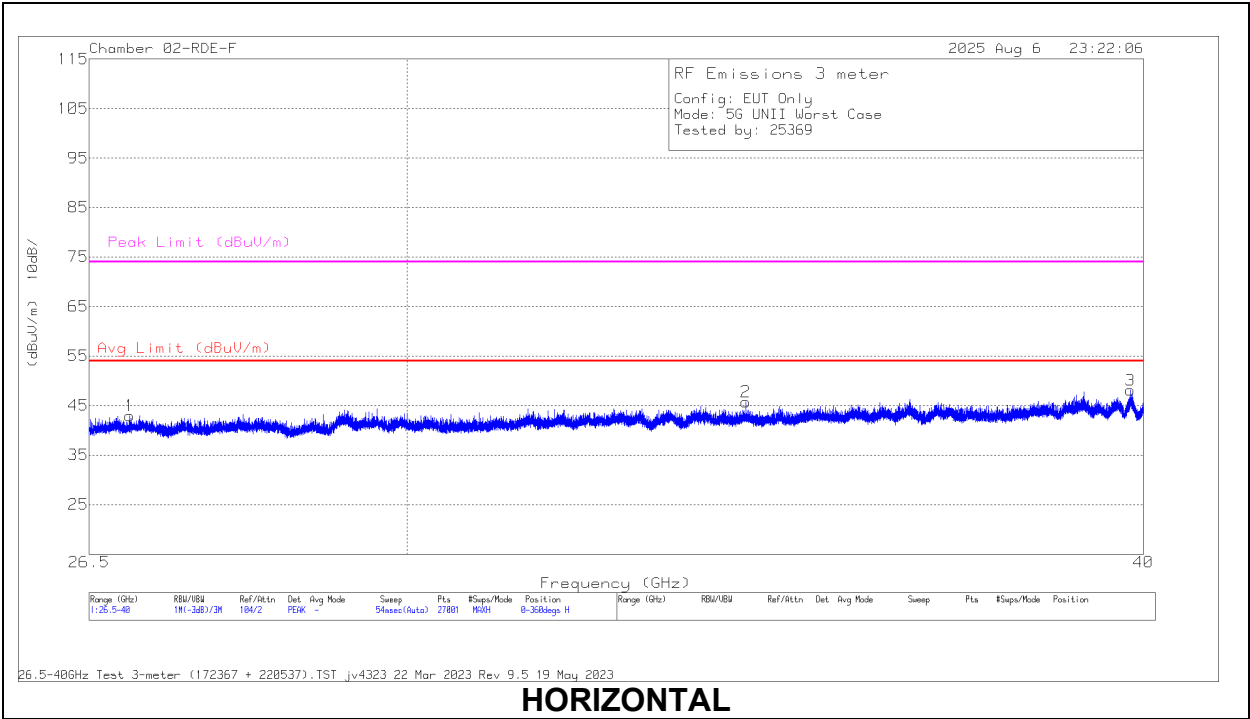

26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172367 ACF (dB/m)	CBL AMP (dB)	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 39.798	45.39	Pk	38.3	-62.1	26.5	48.09	74	-25.91	0-360	199	H
6	* 39.047	45.45	Pk	38.1	-61.9	25.8	47.45	74	-26.55	0-360	101	V
4	26.749	52.19	Pk	35.7	-66.1	21	42.79	74	-31.21	0-360	199	V
1	26.9225	51.64	Pk	35.7	-65.5	21.1	42.94	74	-31.06	0-360	199	H
5	32.8445	47.06	Pk	36.6	-62.3	23.4	44.76	74	-29.24	0-360	199	V
2	34.2485	47.1	Pk	37.1	-62.6	24.1	45.7	74	-28.3	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

2. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

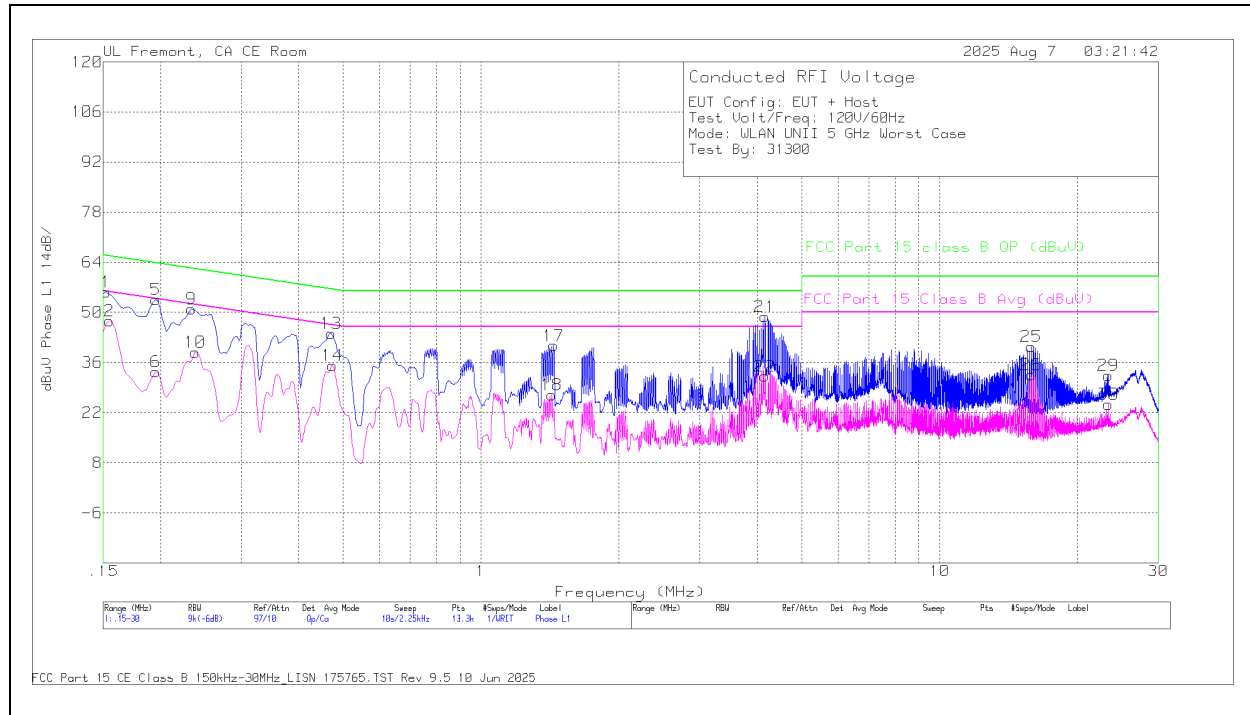

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
2	.1545	28.55	Ca	.5	.1	8.5	10	47.65	55.75	-8.1	-	-
6	.195	14.8	Ca	.1	.1	8.4	10	33.4	53.82	-20.42	-	-
10	.2378	20.71	Ca	-.1	0	8.2	10	38.81	52.17	-13.36	-	-
14	.474	16.7	Ca	.1	0	8.4	10	35.2	46.44	-11.24	-	-
18	1.4258	8.52	Ca	.1	0	8.4	10	27.02	46	-18.98	-	-
22	4.1618	14.03	Ca	.1	0	8	10	32.13	46	-13.87	-	-
26	15.8528	13.82	Ca	.2	.1	8.4	10	32.52	50	-17.48	-	-
30	23.298	5.39	Ca	.3	.2	8.5	10	24.39	50	-25.61	-	-
1	.1523	36.55	Qp	.5	.1	8.5	10	55.65	-	-	65.88	-10.23
5	.195	35.03	Qp	.1	.1	8.4	10	53.63	-	-	63.82	-10.19
9	.2333	32.65	Qp	0	0	8.3	10	50.95	-	-	62.33	-11.38
13	.4718	25.51	Qp	.1	0	8.5	10	44.11	-	-	56.48	-12.37
17	1.4415	22.01	Qp	.1	0	8.6	10	40.71	-	-	56	-15.29
21	4.1618	30.69	Qp	.1	0	8	10	48.79	-	-	56	-7.21
25	15.8494	21.74	Qp	.2	.1	8.4	10	40.44	-	-	60	-19.56
29	23.298	13.39	Qp	.3	.2	8.5	10	32.39	-	-	60	-27.61

Qp - Quasi-Peak detector

Ca - CISPR average detection

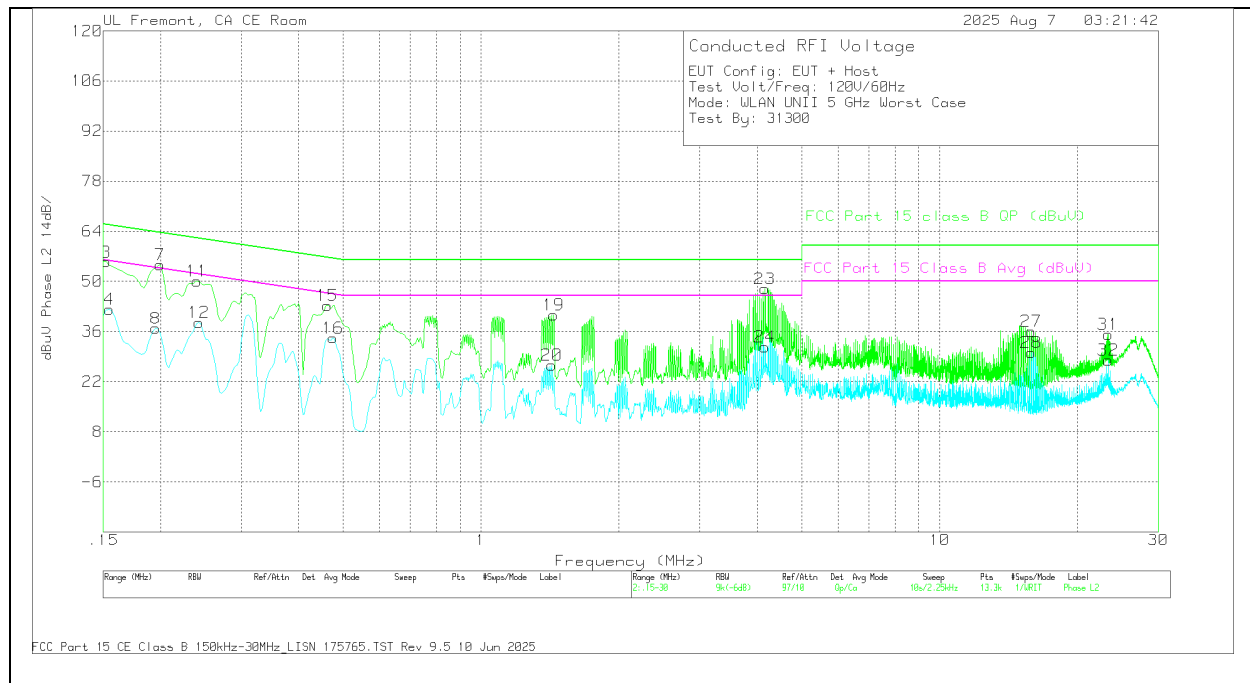LINE 2 RESULTS


Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
4	.1545	23.08	Ca	.5	.1	8.5	10	42.18	55.75	-13.57	-	-
8	.195	18.36	Ca	.1	0	8.4	10	36.86	53.82	-16.96	-	-
12	.2423	20.38	Ca	-.1	0	8.2	10	38.48	52.02	-13.54	-	-
16	.4763	15.82	Ca	0	0	8.4	10	34.22	46.4	-12.18	-	-
20	1.4258	8.11	Ca	.1	0	8.4	10	26.61	46	-19.39	-	-
24	4.1618	13.61	Ca	.1	0	8	10	31.71	46	-14.29	-	-
28	15.855	11.43	Ca	.2	.1	8.4	10	30.13	50	-19.87	-	-
32	23.298	9.08	Ca	.3	.2	8.5	10	28.08	50	-21.92	-	-
3	.1523	36.33	Qp	.5	.1	8.5	10	55.43	-	-	65.88	-10.45
7	.1995	36.17	Qp	.1	0	8.4	10	54.67	-	-	63.63	-8.96
11	.24	32.01	Qp	-.1	0	8.2	10	50.11	-	-	62.1	-11.99
15	.4628	24.61	Qp	.1	0	8.6	10	43.31	-	-	56.64	-13.33
19	1.4415	21.98	Qp	.1	0	8.6	10	40.68	-	-	56	-15.32
23	4.1618	29.81	Qp	.1	0	8	10	47.91	-	-	56	-8.09
27	15.8505	17.37	Qp	.2	.1	8.4	10	36.07	-	-	60	-23.93
31	23.298	16.24	Qp	.3	.2	8.5	10	35.24	-	-	60	-24.76

Qp - Quasi-Peak detector

Ca - CISPR average detection

2.2. AC POWER LINE WITH AC/DC ADAPTER


LINE 1 RESULTS

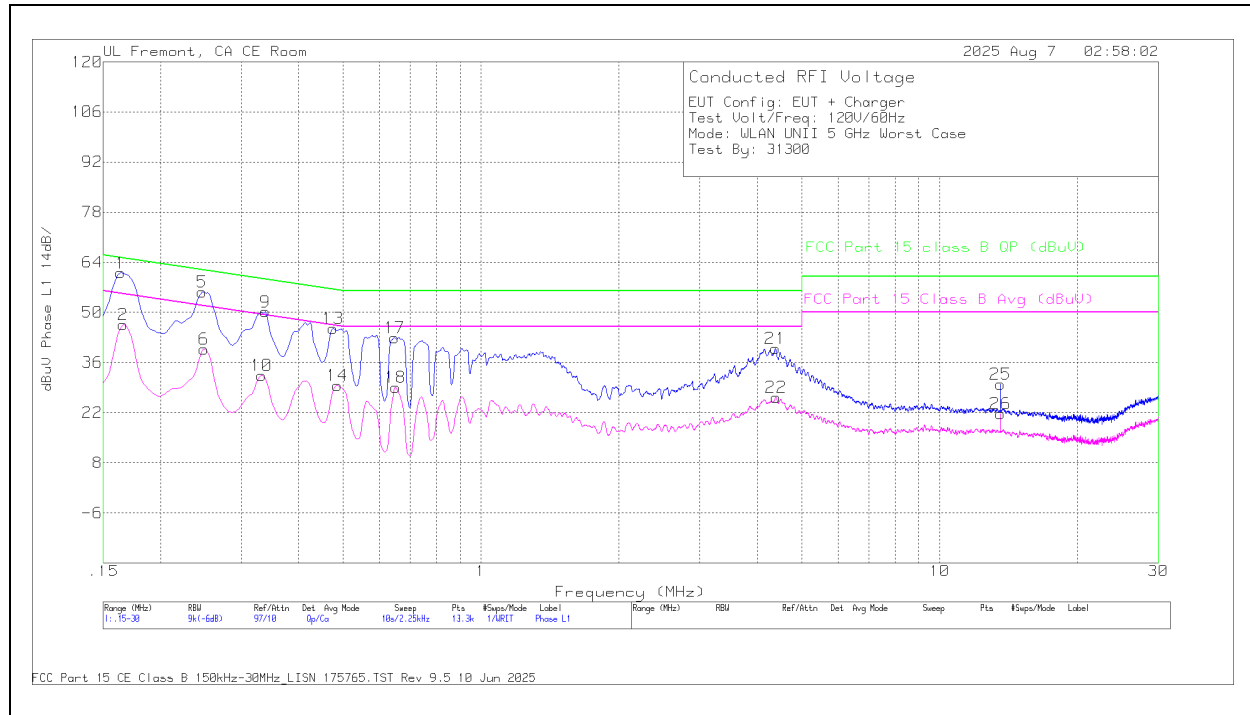

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
2	.1658	27.61	Ca	.4	.1	8.5	10	46.61	55.17	-8.56	-	-
6	.249	21.68	Ca	-.1	0	8.2	10	39.78	51.79	-12.01	-	-
10	.3323	14.4	Ca	-.3	0	8.3	10	32.4	49.39	-16.99	-	-
14	.4864	11.41	Ca	0	0	8.2	10	29.61	46.23	-16.62	-	-
18	.6506	10.55	Ca	.1	0	8.4	10	29.05	46	-16.95	-	-
22	4.4003	6.89	Ca	.8	0	8.6	10	26.29	46	-19.71	-	-
26	13.56	3.25	Ca	.2	.1	8.2	10	21.75	50	-28.25	-	-
1	.1635	42.04	Qp	.4	.1	8.5	10	61.04	-	-	65.28	-4.24
5	.2468	37.65	Qp	-.1	0	8.2	10	55.75	-	-	61.87	-6.12
9	.339	32.17	Qp	-.3	0	8.3	10	50.17	-	-	59.23	-9.06
13	.4763	27.11	Qp	0	0	8.4	10	45.51	-	-	56.4	-10.89
17	.6484	24.47	Qp	.1	0	8.4	10	42.97	-	-	56	-13.03
21	4.3868	20.99	Qp	.6	0	8.4	10	39.99	-	-	56	-16.01
25	13.56	11.37	Qp	.2	.1	8.2	10	29.87	-	-	60	-30.13

Qp - Quasi-Peak detector

Ca - CISPR average detection

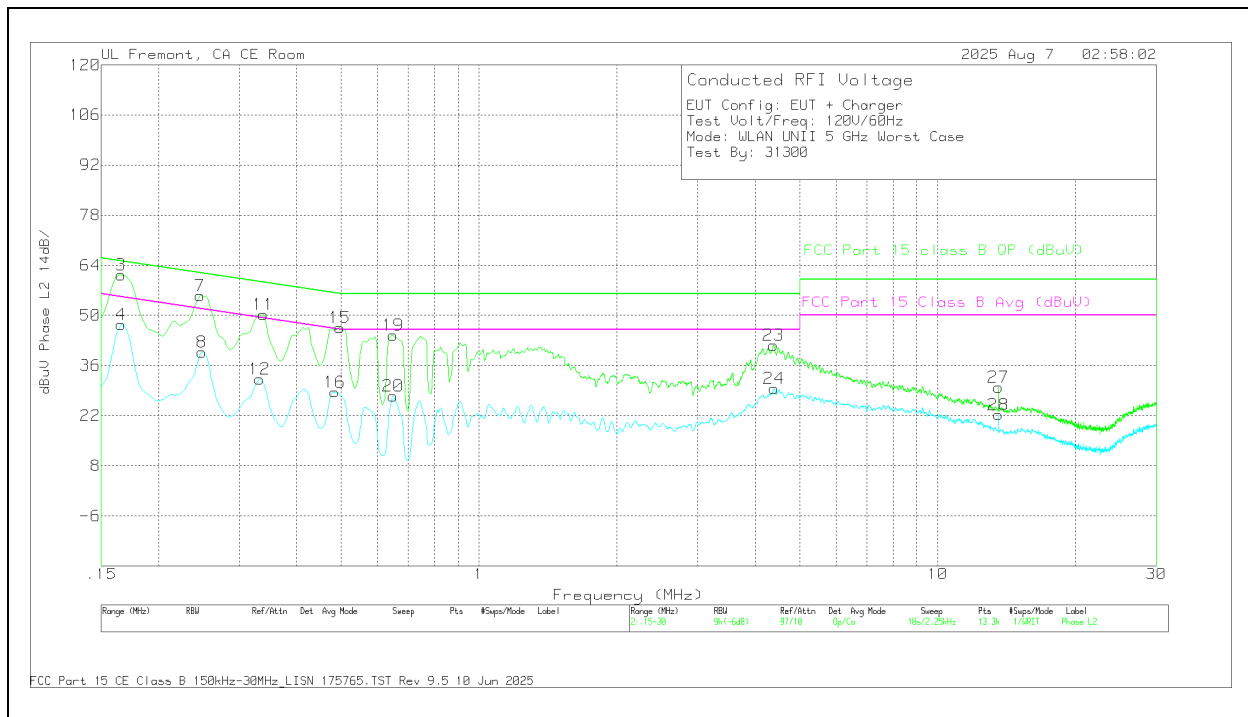LINE 2 RESULTS

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Avg Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
4	.1658	28.5	Ca	.4	.1	8.5	10	47.5	55.17	-7.67	-	-
8	.249	21.71	Ca	-.1	0	8.2	10	39.81	51.79	-11.98	-	-
12	.3323	14.2	Ca	-.3	0	8.3	10	32.2	49.39	-17.19	-	-
16	.4853	10.41	Ca	0	0	8.2	10	28.61	46.25	-17.64	-	-
20	.6495	8.98	Ca	.1	0	8.4	10	27.48	46	-18.52	-	-
24	4.4003	10.15	Ca	.8	0	8.6	10	29.55	46	-16.45	-	-
28	13.56	3.8	Ca	.2	.1	8.2	10	22.3	50	-27.7	-	-
3	.1658	42.36	Qp	.4	.1	8.5	10	61.36	-	-	65.17	-3.81
7	.2468	37.46	Qp	-.1	0	8.2	10	55.56	-	-	61.87	-6.31
11	.339	32.22	Qp	-.3	0	8.3	10	50.22	-	-	59.23	-9.01
15	.4965	28.66	Qp	-.1	0	8	10	46.56	-	-	56.06	-9.5
19	.6495	26.03	Qp	.1	0	8.4	10	44.53	-	-	56	-11.47
23	4.389	22.5	Qp	.7	0	8.5	10	41.7	-	-	56	-14.3
27	13.56	11.47	Qp	.2	.1	8.2	10	29.97	-	-	60	-30.03

Qp - Quasi-Peak detector

Ca - CISPR average detection

3. SETUP PHOTOS

Please refer to report 15496278-EP1V1 FCC IC Setup Photos.

END OF TEST REPORT