

RADIATED TEST REPORT

Report Number: 15496282-E12V2 & E14V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3260 (Parent)
A3516, A3517, A3518 (Variants)

Brand : APPLE

FCC ID : BCG-E8948A (Parent)
BCG-E8954A, BCG-E8955A, BCG-E8956A (Variants)

IC : 579C-E8948A (Parent)
579C-E8954A, 579C-E8955A, 579C-E8956A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2025-07-21

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



TABLE OF CONTENTS

1. RADIATED TEST RESULTS	3
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz	5
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	5
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE	8
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND – BANDEDGE	12
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE	15
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	18
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	30
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	42
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	54
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	57
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	60
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	63
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	66
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	69
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	72
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	75
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	87
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	87
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	88
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	91
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	94
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	97
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	100
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	103
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	106
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	109
1.3. WORST CASE BELOW 1 GHz	121
1.4. WORST CASE 18-26 GHz	123
1.5. WORST CASE 26-40 GHz	125
2. AC POWER LINE CONDUCTED EMISSIONS	127
2.1. EUT WITH AC ADAPTER	128
2.2. EUT WITH LAPTOP	130
3. SETUP PHOTOS	132

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
 FCC §15.205 Restrict bands
 §15.209 and FCC §15.407(b)(6) -Un-Restrict bands

RSS-GEN 8.1
 RSS-GEN 8.9 Un-Restrict bands
 RSS-GEN 8.10 Restrict bands

RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

RESULTS

The plots in these sections are for reference settings only for different bandwidth and different antenna.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (DUAL CLIENT)

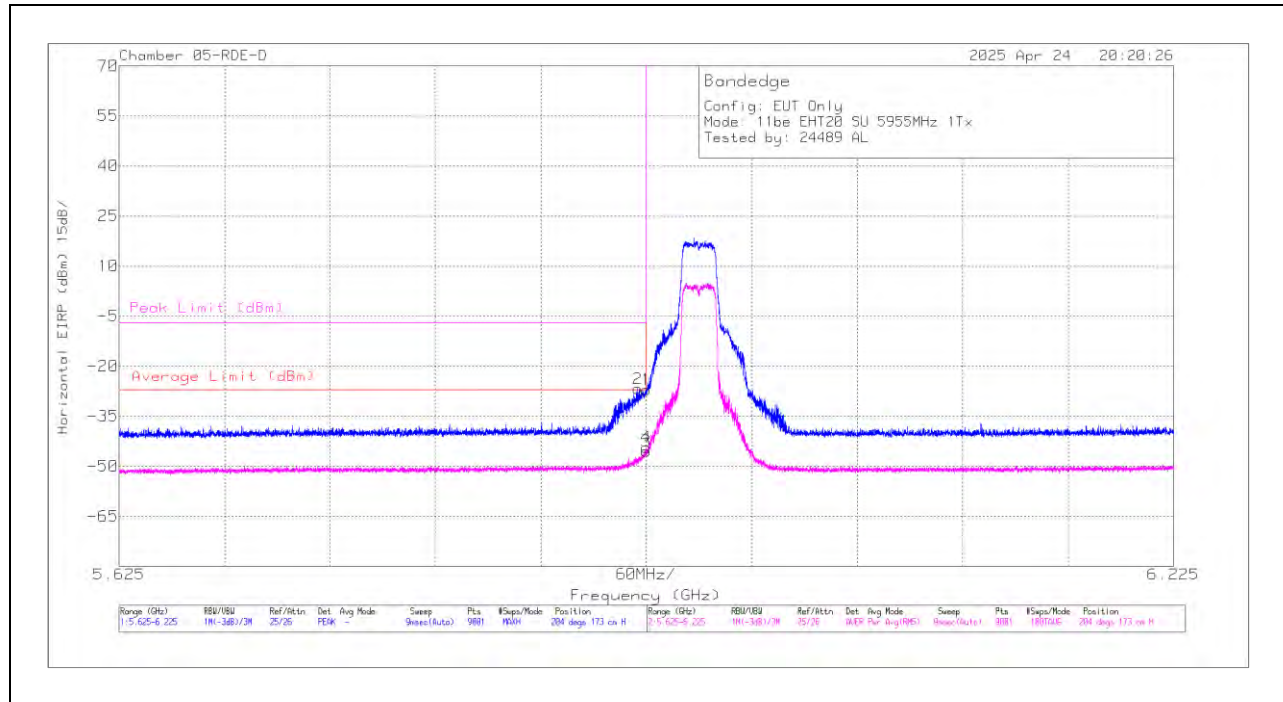
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.920135	-36.03	Pk	35.2	11.8	0	-37.74	-26.77	-	-	-7	-19.77	204	173	H
			5.924868	-53.78	RMS	35.3	11.8	0	-37.72	-44.4	-27	-17.4	-	-	204	173	H
			5.925	-36.43	Pk	35.3	11.8	0	-37.72	-27.05	-	-	-7	-20.05	204	173	H
			5.925	-54.77	RMS	35.3	11.8	0	-37.72	-45.39	-27	-18.39	-	-	204	173	H
			5.924068	-56.35	RMS	35.3	11.8	0	-37.7	-46.95	-27	-19.95	-	-	194	270	V
			5.924735	-40.52	Pk	35.3	11.8	0	-37.71	-31.13	-	-	-7	-24.13	194	270	V
		5	5.925	-41.51	Pk	35.3	11.8	0	-37.72	-32.13	-	-	-7	-25.13	194	270	V
			5.925	-57.15	RMS	35.3	11.8	0	-37.72	-47.77	-27	-20.77	-	-	194	270	V
			5.925	-38.63	Pk	35.3	11.8	0	-37.72	-29.25	-	-	-7	-22.25	151	189	H
			5.924735	-38.19	Pk	35.3	11.8	0	-37.71	-28.8	-	-	-7	-21.8	151	189	H
			5.925	-55.45	RMS	35.3	11.8	0	-37.72	-46.07	-27	-19.07	-	-	151	189	H
			5.924668	-55.16	RMS	35.3	11.8	0	-37.71	-45.77	-27	-18.77	-	-	151	189	H
			5.925	-40.8	Pk	35.3	11.8	0	-37.72	-31.42	-	-	-7	-24.42	115	301	V
			5.924668	-40.78	Pk	35.3	11.8	0	-37.71	-31.39	-	-	-7	-24.39	115	301	V
			5.925	-57.91	RMS	35.3	11.8	0	-37.72	-48.53	-27	-21.53	-	-	115	301	V
			5.924935	-56.8	RMS	35.3	11.8	0	-37.72	-47.42	-27	-20.42	-	-	115	301	V
EHT40 (SU Mode)	5965	6	5.924735	-29.92	Pk	35.4	11.8	0	-36.1	-18.82	-	-	-7	-11.82	257	228	H
			5.924735	-49.9	RMS	35.4	11.8	0	-36.1	-38.8	-27	-11.8	-	-	257	228	H
			5.925	-33.13	Pk	35.4	11.8	0	-36.1	-22.03	-	-	-7	-15.03	257	228	H
			5.925	-50.96	RMS	35.4	11.8	0	-36.1	-39.86	-27	-12.86	-	-	257	228	H
			5.923801	-45.89	RMS	35.3	11.8	0	-36.1	-34.89	-27	-7.89	-	-	212	129	V
			5.924868	-25.5	Pk	35.4	11.8	0	-36.1	-14.4	-	-	-7	-7.4	212	129	V
		5	5.925	-27.82	Pk	35.4	11.8	0	-36.1	-16.72	-	-	-7	-9.72	212	129	V
			5.925	-46.06	RMS	35.4	11.8	0	-36.1	-34.96	-27	-7.96	-	-	212	129	V
			5.923801	-43.98	RMS	35.3	11.8	0	-37.7	-34.58	-27	-7.58	-	-	148	223	H
			5.924935	-24.75	Pk	35.3	11.8	0	-37.72	-15.37	-	-	-7	-8.37	148	223	H
			5.925	-24.53	Pk	35.3	11.8	0	-37.72	-15.15	-	-	-7	-8.15	148	223	H
			5.925	-44.89	RMS	35.3	11.8	0	-37.72	-35.51	-27	-8.51	-	-	148	223	H
			5.923668	-31.43	Pk	35.3	11.8	0	-37.71	-22.04	-	-	-7	-15.04	193	115	V
			5.924935	-49.51	RMS	35.3	11.8	0	-37.72	-40.13	-27	-13.13	-	-	193	115	V
			5.925	-35.1	Pk	35.3	11.8	0	-37.72	-25.72	-	-	-7	-18.72	193	115	V
			5.925	-52.49	RMS	35.3	11.8	0	-37.72	-43.11	-27	-16.11	-	-	193	115	V
EHT80 (SU Mode)	5985	6	5.907668	-49.44	RMS	35.3	11.8	0	-36.27	-38.61	-27	-11.61	-	-	255	183	H
			5.924935	-31.79	Pk	35.4	11.8	0	-36.1	-20.69	-	-	-7	-13.69	255	183	H
			5.925	-33.69	Pk	35.4	11.8	0	-36.1	-22.59	-	-	-7	-15.59	255	183	H
			5.925	-52.99	RMS	35.4	11.8	0	-36.1	-41.89	-27	-14.89	-	-	255	183	H
			5.921335	-32.36	Pk	35.3	11.8	0	-36.1	-21.36	-	-	-7	-14.36	189	172	V
			5.923668	-49.3	RMS	35.3	11.8	0	-36.1	-38.3	-27	-11.3	-	-	189	172	V
		5	5.925	-34.31	Pk	35.4	11.8	0	-36.1	-23.21	-	-	-7	-16.21	189	172	V
			5.925	-53.36	RMS	35.4	11.8	0	-36.1	-42.26	-27	-15.26	-	-	189	172	V
			5.918535	-45.64	RMS	35.2	11.8	0	-37.67	-36.31	-27	-9.31	-	-	147	223	H
			5.922868	-26.88	Pk	35.3	11.8	0	-37.72	-17.5	-	-	-7	-10.5	147	223	H
			5.925	-29.51	Pk	35.3	11.8	0	-37.72	-20.13	-	-	-7	-13.13	147	223	H
			5.925	-47.18	RMS	35.3	11.8	0	-37.72	-37.8	-27	-10.8	-	-	147	223	H
			5.915935	-33.12	Pk	35.2	11.8	0	-37.74	-23.86	-	-	-7	-16.86	223	147	V
			5.924202	-50.8	RMS	35.3	11.8	0	-37.7	-41.4	-27	-14.4	-	-	223	147	V
			5.925	-36.65	Pk	35.3	11.8	0	-37.72	-27.27	-	-	-7	-20.27	223	147	V
			5.925	-53.23	RMS	35.3	11.8	0	-37.72	-43.85	-27	-16.85	-	-	223	147	V
EHT160 (SU Mode)	6025	6	5.896468	-41.38	RMS	35.2	11.8	0.14	-37.68	-31.92	-27	-4.92	-	-	229	174	H
			5.901335	-23.25	Pk	35.2	11.8	0	-37.66	-13.91	-	-	-7	-6.91	229	174	H
			5.925	-31.88	Pk	35.3	11.8	0	-37.72	-22.5	-	-	-7	-15.5	229	174	H
			5.925	-51.45	RMS	35.3	11.8	0.14	-37.72	-41.93	-27	-14.93	-	-	229	174	H
			5.896068	-46.64	RMS	35.2	11.8	0.14	-37.66	-37.16	-27	-10.16	-	-	206	258	V
			5.901735	-29.09	Pk	35.2	11.8	0	-37.67	-19.76	-	-	-7	-12.76	206	258	V
		5	5.925	-37.68	Pk	35.3	11.8	0	-37.72	-28.3	-	-	-7	-21.3	206	258	V
			5.925	-55.78	RMS	35.3	11.8	0.14	-37.72	-46.26	-27	-19.26	-	-	206	258	V
			5.897268	-40.38	Pk	35.3	11.8	0	-36.27	-29.55	-	-	-7	-22.55	153	216	H
			5.899468	-55.49	RMS	35.3	11.8	0.14	-36.25	-44.5	-27	-17.50	-	-	153	216	H
			5.925	-44	Pk	35.4	11.8	0	-36.1	-32.9	-	-	-7	-25.9	153	216	H
			5.925	-58.86	RMS	35.4	11.8	0.14	-36.1	-47.62	-27	-20.62	-	-	153	216	H
			5.895868	-43.54	Pk	35.3	11.8	0	-36.3	-32.74	-	-	-7	-25.74	207	106	V
			5.896401	-58.27	RMS	35.3	11.8	0.14	-36.3	-47.33	-27	-20.33	-	-	207	106	V
			5.925	-49.46	Pk	35.4	11.8	0	-36.1	-38.36	-	-	-7	-31.36	207	106	V
			5.925	-60.66	RMS	35.4	11.8	0.14	-36.1	-49.42	-27	-22.42	-	-	207	106	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

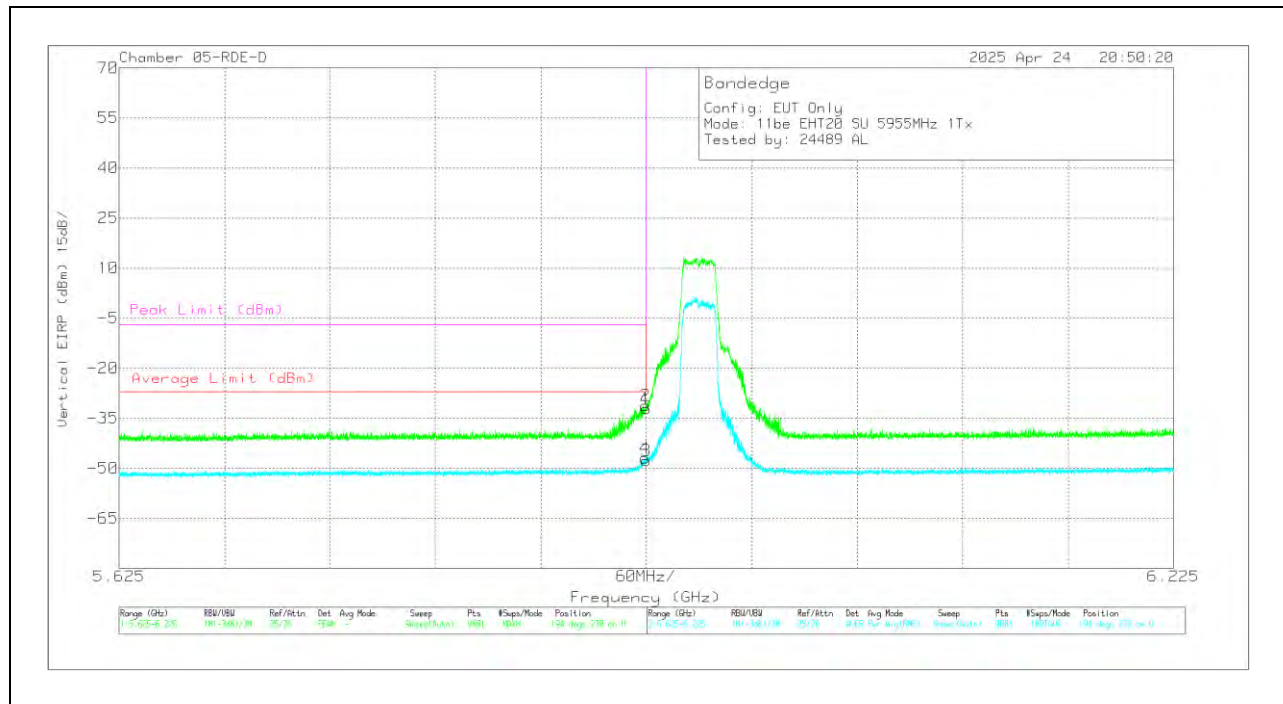
ADR - U-NII: AD primary method, RMS average

1TX Antenna 6 MODE: SU**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.920135	-36.03	Pk	35.2	11.8	0	-37.74	-26.77	-	-	-7	-19.77	204	173	H
4	5.924868	-53.78	RMS	35.3	11.8	0	-37.72	-44.4	-27	-17.4	-	-	204	173	H
1	5.925	-36.43	Pk	35.3	11.8	0	-37.72	-27.05	-	-	-7	-20.05	204	173	H
3	5.925	-54.77	RMS	35.3	11.8	0	-37.72	-45.39	-27	-18.39	-	-	204	173	H

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.924068	-56.35	RMS	35.3	11.8	0	-37.7	-46.95	-27	-19.95	-	-	194	270	V
2	5.924735	-40.52	Pk	35.3	11.8	0	-37.71	-31.13	-	-	-7	-24.13	194	270	V
1	5.925	-41.51	Pk	35.3	11.8	0	-37.72	-32.13	-	-	-7	-25.13	194	270	V
3	5.925	-57.15	RMS	35.3	11.8	0	-37.72	-47.77	-27	-20.77	-	-	194	270	V

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE

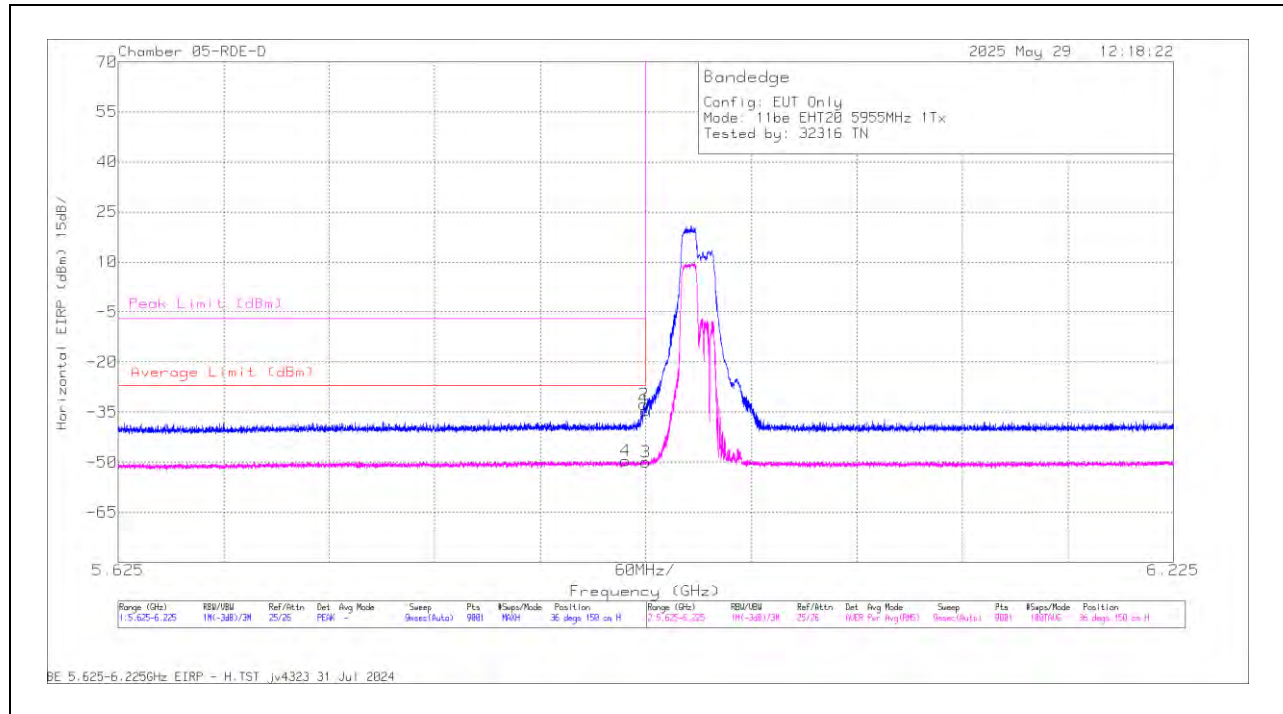
UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106/ Index 53)	5955	6	5.913535	-58.79	RMS	35.2	11.8	0	-37.74	-49.53	-27	-22.53	-	-	36	150	H
			5.923935	-42.17	Pk	35.3	11.8	0	-37.7	-32.77	-	-	-7	-25.77	36	150	H
			5.925	-43.94	Pk	35.3	11.8	0	-37.72	-34.56	-	-	-7	-27.56	36	150	H
			5.925	-59.3	RMS	35.3	11.8	0	-37.72	-49.92	-27	-22.92	-	-	36	150	H
			5.792334	-46.94	Pk	35.1	11.8	0	-37.98	-38.02	-	-	-7	-31.02	14	291	V
			5.875068	-59	RMS	35.2	11.8	0	-37.75	-49.75	-27	-22.75	-	-	14	291	V
		5	5.925	-49.05	Pk	35.3	11.8	0	-37.72	-39.67	-	-	-7	-32.67	14	291	V
			5.925	-60.81	RMS	35.3	11.8	0	-37.72	-51.43	-27	-24.43	-	-	14	291	V
			5.896068	-59.2	RMS	35.2	11.8	0	-37.66	-49.86	-27	-22.86	-	-	320	101	H
			5.924735	-43.44	Pk	35.3	11.8	0	-37.71	-34.05	-	-	-7	-27.05	320	101	H
			5.925	-44.68	Pk	35.3	11.8	0	-37.72	-35.3	-	-	-7	-28.3	320	101	H
			5.925	-60.04	RMS	35.3	11.8	0	-37.72	-50.66	-27	-23.66	-	-	320	101	H
			5.859535	-58.91	RMS	35.2	11.8	0	-37.78	-49.69	-27	-22.69	-	-	38	101	V
			5.923735	-44.8	Pk	35.3	11.8	0	-37.71	-35.41	-	-	-7	-28.41	38	101	V
			5.925	-48.03	Pk	35.3	11.8	0	-37.72	-38.65	-	-	-7	-31.65	38	101	V
			5.925	-60.47	RMS	35.3	11.8	0	-37.72	-51.09	-27	-24.09	-	-	38	101	V
EHT20 (RU 26/ Index 0)	5955	6	5.915401	-60.02	RMS	35.3	11.8	0	-36.06	-48.98	-27	-21.98	-	-	222	155	H
			5.924868	-45.85	Pk	35.4	11.8	0	-36.1	-34.75	-	-	-7	-27.75	222	155	H
			5.925	-46.15	Pk	35.4	11.8	0	-36.1	-35.05	-	-	-7	-28.05	222	155	H
			5.925	-61.59	RMS	35.4	11.8	0	-36.1	-50.49	-27	-23.49	-	-	222	155	H
			5.781667	-47.52	Pk	35	11.8	0	-36.6	-37.32	-	-	-7	-30.32	213	320	V
			5.898468	-60.08	RMS	35.3	11.8	0	-36.25	-49.23	-27	-22.23	-	-	213	320	V
		5	5.925	-51.15	Pk	35.4	11.8	0	-36.1	-40.05	-	-	-7	-33.05	213	320	V
			5.925	-61.15	RMS	35.4	11.8	0	-36.1	-50.05	-27	-23.05	-	-	213	320	V
			5.924468	-60.08	RMS	35.3	11.8	0	-36.1	-49.08	-27	-22.08	-	-	269	112	H
			5.924735	-42.62	Pk	35.4	11.8	0	-36.1	-31.52	-	-	-7	-24.52	269	112	H
			5.925	-43.3	Pk	35.4	11.8	0	-36.1	-32.2	-	-	-7	-25.2	269	112	H
			5.925	-61.37	RMS	35.4	11.8	0	-36.1	-50.27	-27	-23.27	-	-	269	112	H
			5.913468	-60.41	RMS	35.3	11.8	0	-36.1	-49.41	-27	-22.41	-	-	301	125	V
			5.924268	-45.76	Pk	35.3	11.8	0	-36.1	-34.76	-	-	-7	-27.76	301	125	V
			5.925	-47.23	Pk	35.4	11.8	0	-36.1	-36.13	-	-	-7	-29.13	301	125	V
			5.925	-60.89	RMS	35.4	11.8	0	-36.1	-49.79	-27	-22.79	-	-	301	125	V
EHT40 (MRU 106+26/ Index 82)	5965	6	5.925	-44.37	Pk	35	11.8	0	-34.9	-32.47	-	-	-7	-25.47	175	190	H
			5.924735	-43.88	Pk	35	11.8	0	-34.87	-31.95	-	-	-7	-24.95	175	190	H
			5.925	-62.16	RMS	35	11.8	0	-34.9	-50.26	-27	-23.26	-	-	175	190	H
			5.924002	-60.79	RMS	35	11.8	0	-34.8	-48.79	-27	-21.79	-	-	175	190	H
			5.925	-52.62	Pk	35	11.8	0	-34.9	-40.72	-	-	-7	-33.72	219	151	V
			5.835134	-49.63	Pk	34.8	11.8	0	-34.6	-37.63	-	-	-7	-30.63	219	151	V
		5	5.925	-62.96	RMS	35	11.8	0	-34.9	-51.06	-27	-24.06	-	-	219	151	V
			5.910401	-61.54	RMS	34.9	11.8	0	-34.86	-49.7	-27	-22.7	-	-	219	151	V
			5.925	-41.54	Pk	35.4	11.8	0	-37.5	-31.84	-	-	-7	-24.84	277	207	H
			5.924802	-40.48	Pk	35.4	11.8	0	-37.5	-30.78	-	-	-7	-23.78	277	207	H
			5.925	-61.16	RMS	35.4	11.8	0	-37.5	-51.46	-27	-24.46	-	-	277	207	H
			5.838801	-59.38	RMS	35.3	11.8	0	-37.71	-49.99	-27	-22.99	-	-	277	207	H
			5.925	-47.22	Pk	35.4	11.8	0	-37.5	-37.52	-	-	-7	-30.52	110	216	V
			5.923401	-44.61	Pk	35.4	11.8	0	-37.53	-34.94	-	-	-7	-27.94	110	216	V
			5.925	-60.98	RMS	35.4	11.8	0	-37.5	-51.28	-27	-24.28	-	-	110	216	V
			5.882468	-59.94	RMS	35.4	11.8	0	-37.56	-50.3	-27	-23.3	-	-	110	216	V
EHT40 (RU 26/ Index 0)	5965	6	5.911468	-57.85	RMS	35.2	11.8	0	-37.68	-48.53	-27	-21.53	-	-	217	147	H
			5.924935	-32.56	Pk	35.3	11.8	0	-37.72	-23.18	-	-	-7	-16.18	217	147	H
			5.925	-32.37	Pk	35.3	11.8	0	-37.72	-22.99	-	-	-7	-15.99	217	147	H
			5.925	-60.29	RMS	35.3	11.8	0	-37.72	-50.91	-27	-23.91	-	-	217	147	H
			5.924668	-58.59	RMS	35.3	11.8	0	-37.71	-49.2	-27	-22.2	-	-	205	261	V
			5.924802	-36.62	Pk	35.3	11.8	0	-37.72	-27.24	-	-	-7	-20.24	205	261	V
		5	5.925	-37.91	Pk	35.3	11.8	0	-37.72	-28.53	-	-	-7	-21.53	205	261	V
			5.925	-60.71	RMS	35.3	11.8	0	-37.72	-51.33	-27	-24.33	-	-	205	261	V
			5.924535	-37.07	Pk	35.3	11.8	0	-37.71	-27.68	-	-	-7	-20.68	152	193	H
			5.924602	-57.61	RMS	35.3	11.8	0	-37.71	-48.22	-27	-21.22	-	-	152	193	H
			5.925	-37.39	Pk	35.3	11.8	0	-37.72	-28.01	-	-	-7	-21.01	152	193	H
			5.925	-60.53	RMS	35.3	11.8	0	-37.72	-51.15	-27	-24.15	-	-	152	193	H
			5.924335	-59.48	RMS	35.3	11.8	0	-37.71	-50.09	-27	-23.09	-	-	190	162	V
			5.924402	-38.79	Pk	35.3	11.8	0	-37.71	-29.4	-	-	-7	-22.4	190	162	V
			5.925	-39.13	Pk	35.3	11.8	0	-37.72	-29.75	-	-	-7	-22.75	190	162	V
			5.925	-59.79	RMS	35.3	11.8	0	-37.72	-50.41	-27	-23.41	-	-	190	162	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

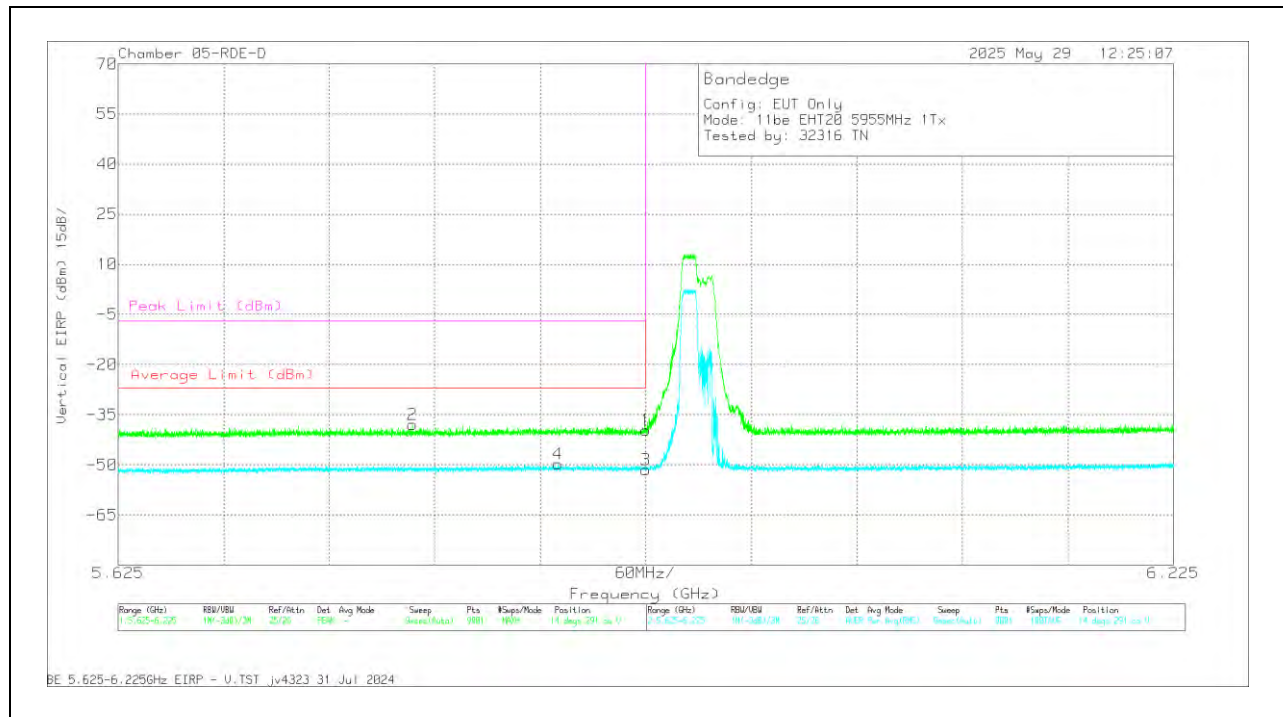
UNI-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversio n Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (MRU 106+26/ Index 82)	5985	6	5.925	-45.11	Pk	35	11.8	0	-34.9	-33.21	-	-	-7	-26.21	172	243	H
			5.924402	-43.92	Pk	35	11.8	0	-34.84	-31.96	-	-	-7	-24.96	172	243	H
			5.925	-62.44	RMS	35	11.8	0	-34.9	-50.54	-27	-23.54	-	-	172	243	H
			5.923468	-60.79	RMS	35	11.8	0	-34.8	-48.79	-27	-21.79	-	-	172	243	H
			5.925	-52.74	Pk	35	11.8	0	-34.9	-40.84	-	-	-7	-33.84	202	127	V
			5.872001	-49.33	Pk	34.8	11.8	0	-34.8	-37.53	-	-	-7	-30.53	202	127	V
		5	5.925	-62.84	RMS	35	11.8	0	-34.9	-50.94	-27	-23.94	-	-	202	127	V
			5.882001	-61.62	RMS	34.9	11.8	0	-34.8	-49.72	-27	-22.72	-	-	202	127	V
			5.925	-45.72	Pk	35.4	11.8	0	-37.5	-36.02	-	-	-7	-29.02	194	197	H
			5.924868	-41.57	Pk	35.4	11.8	0	-37.5	-31.87	-	-	-7	-24.87	194	197	H
			5.925	-59.95	RMS	35.4	11.8	0	-37.5	-50.25	-27	-23.25	-	-	194	197	H
			5.923268	-59.17	RMS	35.4	11.8	0	-37.53	-49.5	-27	-22.5	-	-	194	197	H
			5.925	-44.79	Pk	35.4	11.8	0	-37.5	-35.09	-	-	-7	-28.09	223	134	V
			5.924935	-44.78	Pk	35.4	11.8	0	-37.5	-35.08	-	-	-7	-28.08	223	134	V
			5.925	-61.14	RMS	35.4	11.8	0	-37.5	-51.44	-27	-24.44	-	-	223	134	V
			5.889001	-59.82	RMS	35.4	11.8	0	-37.54	-50.16	-27	-23.16	-	-	223	134	V
EHT80 (RU 26/ Index 0)	5985	6	5.924668	-32.52	Pk	35.3	11.8	0	-37.71	-23.13	-	-	-7	-16.13	218	189	H
			5.924868	-57.1	RMS	35.3	11.8	0	-37.72	-47.72	-27	-20.72	-	-	218	189	H
			5.925	-32.5	Pk	35.3	11.8	0	-37.72	-23.12	-	-	-7	-16.12	218	189	H
			5.925	-59.62	RMS	35.3	11.8	0	-37.72	-50.24	-27	-23.24	-	-	218	189	H
			5.922201	-59.54	RMS	35.3	11.8	0	-37.7	-50.14	-27	-23.14	-	-	205	356	V
			5.924802	-39.64	Pk	35.3	11.8	0	-37.72	-30.26	-	-	-7	-23.26	205	356	V
		5	5.925	-40.16	Pk	35.3	11.8	0	-37.72	-30.78	-	-	-7	-23.78	205	356	V
			5.925	-60.82	RMS	35.3	11.8	0	-37.72	-51.44	-27	-24.44	-	-	205	356	V
			5.924868	-59.18	RMS	35.3	11.8	0	-37.72	-49.8	-27	-22.8	-	-	155	211	H
			5.924935	-36.64	Pk	35.3	11.8	0	-37.72	-27.26	-	-	-7	-20.26	155	211	H
			5.925	-36.75	Pk	35.3	11.8	0	-37.72	-27.37	-	-	-7	-20.37	155	211	H
			5.925	-59.98	RMS	35.3	11.8	0	-37.72	-50.6	-27	-23.6	-	-	155	211	H
			5.923135	-59.06	RMS	35.3	11.8	0	-37.72	-49.68	-27	-22.68	-	-	129	283	V
			5.924935	-37.97	Pk	35.3	11.8	0	-37.72	-28.59	-	-	-7	-21.59	129	283	V
			5.925	-39.54	Pk	35.3	11.8	0	-37.72	-30.16	-	-	-7	-23.16	129	283	V
			5.925	-60.34	RMS	35.3	11.8	0	-37.72	-50.96	-27	-23.96	-	-	129	283	V
EHT160 (RU 52 / Index 37)	6025	6	5.925	-51.83	Pk	35	11.8	0	-34.9	-39.93	-	-	-7	-32.93	350	188	H
			5.819134	-48.96	Pk	34.7	11.8	0	-34.6	-37.06	-	-	-7	-30.06	350	188	H
			5.925	-62.15	RMS	35	11.8	0	-34.9	-50.25	-27	-23.25	-	-	350	188	H
			5.901601	-60.35	RMS	34.9	11.8	0	-34.8	-48.45	-27	-21.45	-	-	350	188	H
			5.925	-51.55	Pk	35	11.8	0	-34.9	-39.65	-	-	-7	-32.65	311	363	V
			5.865668	-48.91	Pk	34.8	11.8	0	-34.8	-37.11	-	-	-7	-30.11	311	363	V
		5	5.925	-62.09	RMS	35	11.8	0	-34.9	-50.19	-27	-23.19	-	-	311	363	V
			5.829668	-61.51	RMS	34.8	11.8	0	-34.6	-49.51	-27	-22.51	-	-	311	363	V
			5.925	-51.35	Pk	35	11.8	0	-34.9	-39.45	-	-	-7	-32.45	268	187	H
			5.908601	-49.12	Pk	34.9	11.8	0	-34.84	-37.26	-	-	-7	-30.26	268	187	H
			5.925	-62.78	RMS	35	11.8	0	-34.9	-50.88	-27	-23.88	-	-	268	187	H
			5.918068	-61.19	RMS	35	11.8	0	-34.9	-49.29	-27	-22.29	-	-	268	187	H
			5.925	-52.02	Pk	35	11.8	0	-34.9	-40.12	-	-	-7	-33.12	296	196	V
			5.733734	-49.18	Pk	34.5	11.8	0	-34.9	-37.78	-	-	-7	-30.78	296	196	V
			5.925	-62.66	RMS	35	11.8	0	-34.9	-50.76	-27	-23.76	-	-	296	196	V
			5.828668	-61.22	RMS	34.8	11.8	0	-34.6	-49.22	-27	-22.22	-	-	296	196	V
EHT160 (RU 26 / Index 0)	6025	6	5.924068	-61.27	RMS	35.2	11.8	0	-36.01	-50.28	-27	-23.28	-	-	32	162	H
			5.924802	-40.09	Pk	35.2	11.8	0	-36.16	-29.25	-	-	-7	-22.25	32	162	H
			5.925	-40.55	Pk	35.2	11.8	0	-36.2	-29.75	-	-	-7	-22.75	32	162	H
			5.925	-62.93	RMS	35.2	11.8	0	-36.2	-52.13	-27	-25.13	-	-	32	162	H
			5.924468	-61.32	RMS	35.2	11.8	0	-36.09	-50.41	-27	-23.41	-	-	345	392	V
			5.924535	-40.32	Pk	35.2	11.8	0	-36.11	-29.43	-	-	-7	-22.43	345	392	V
		5	5.925	-40.9	Pk	35.2	11.8	0	-36.2	-30.1	-	-	-7	-23.1	345	392	V
			5.925	-63.51	RMS	35.2	11.8	0	-36.2	-52.71	-27	-25.71	-	-	345	392	V
			5.922201	-61.2	RMS	35.2	11.8	0	-35.92	-50.12	-27	-23.12	-	-	283	213	H
			5.924602	-38.2	Pk	35.2	11.8	0	-36.12	-27.32	-	-	-7	-20.32	283	213	H
			5.925	-38.71	Pk	35.2	11.8	0	-36.2	-27.91	-	-	-7	-20.91	283	213	H
			5.925	-62.86	RMS	35.2	11.8	0	-36.2	-52.06	-27	-25.06	-	-	283	213	H
			5.923935	-41.07	Pk	35.2	11.8	0	-36	-30.07	-	-	-7	-23.07	308	187	V
			5.924335	-61.27	RMS	35.2	11.8	0	-36.07	-50.34	-27	-23.34	-	-	308	187	V
			5.925	-41.71	Pk	35.2	11.8	0	-36.2	-30.91	-	-	-7	-23.91	308	187	V
			5.925	-63.45	RMS	35.2	11.8	0	-36.2	-52.65	-27	-25.65	-	-	308	187	V

1TX Antenna 6 MODE: 106-Tones, RU Index 53**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.913535	-58.79	RMS	35.2	11.8	0	-37.74	-49.53	-27	-22.53	-	-	36	150	H
2	5.923935	-42.17	Pk	35.3	11.8	0	-37.7	-32.77	-	-	-7	-25.77	36	150	H
1	5.925	-43.94	Pk	35.3	11.8	0	-37.72	-34.56	-	-	-7	-27.56	36	150	H
3	5.925	-59.3	RMS	35.3	11.8	0	-37.72	-49.92	-27	-22.92	-	-	36	150	H

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.792334	-46.94	Pk	35.1	11.8	0	-37.98	-38.02	-	-	-7	-31.02	14	291	V
4	5.875068	-59	RMS	35.2	11.8	0	-37.75	-49.75	-27	-22.75	-	-	14	291	V
1	5.925	-49.05	Pk	35.3	11.8	0	-37.72	-39.67	-	-	-7	-32.67	14	291	V
3	5.925	-60.81	RMS	35.3	11.8	0	-37.72	-51.43	-27	-24.43	-	-	14	291	V

Pk - Peak detector

RMS - RMS detection

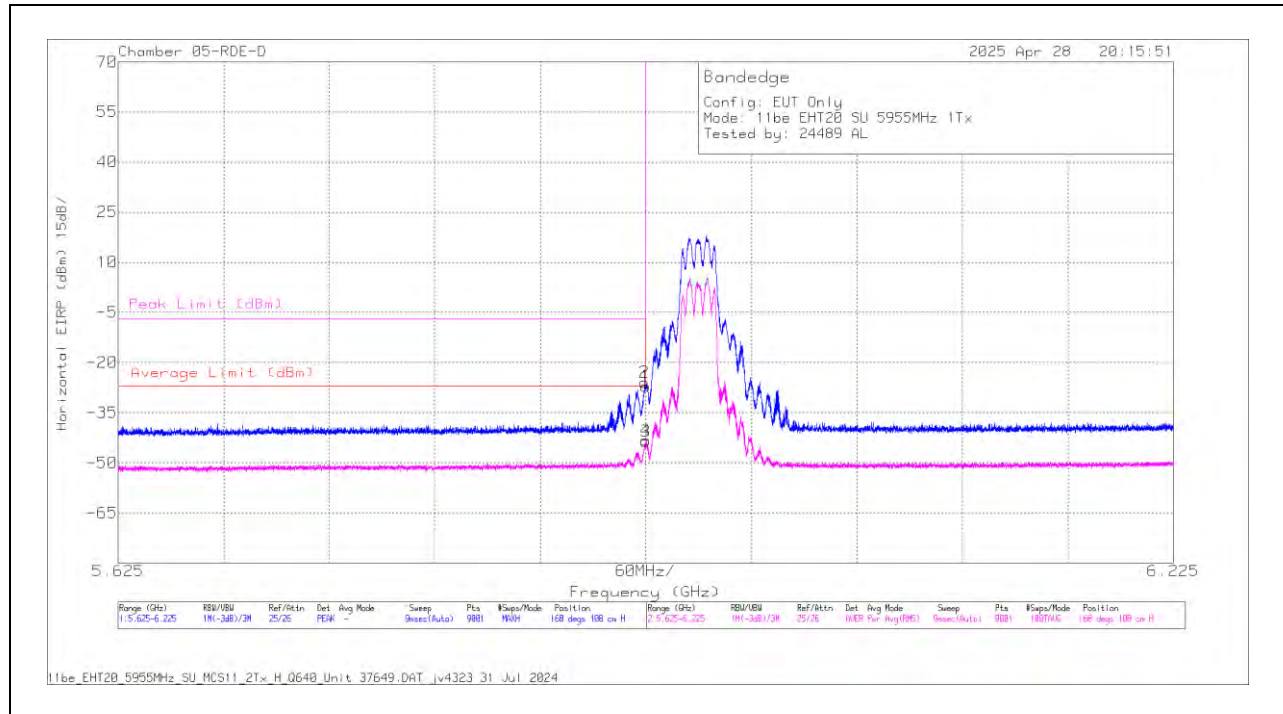
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6 + 5	5.925	-36.43	Pk	35.3	11.8	0	-37.72	-27.05	-	-	-7	-20.05	168	108	H
			5.924202	-35.35	Pk	35.3	11.8	0	-37.7	-25.95	-	-	-7	-18.95	168	108	H
			5.925	-52.9	RMS	35.3	11.8	0	-37.72	-43.52	-27	-16.52	-	-	168	108	H
			5.924935	-52.68	RMS	35.3	11.8	0	-37.72	-43.3	-27	-16.3	-	-	168	108	H
			5.925	-34.86	Pk	35.3	11.8	0	-37.72	-25.48	-	-	-7	-18.48	214	133	V
			5.924735	-33.63	Pk	35.3	11.8	0	-37.71	-24.24	-	-	-7	-17.24	214	133	V
			5.925	-51.6	RMS	35.3	11.8	0	-37.72	-42.22	-27	-15.22	-	-	214	133	V
			5.924868	-50.23	RMS	35.3	11.8	0	-37.72	-40.85	-27	-13.85	-	-	214	133	V
EHT40 (SU Mode)	5965	6 + 5	5.923801	-42.2	RMS	35.3	11.8	0	-36.1	-31.2	-27	-4.2	-	-	272	118	H
			5.924202	-25.22	Pk	35.3	11.8	0	-36.1	-14.22	-	-	-7	-7.22	272	118	H
			5.925	-26.04	Pk	35.4	11.8	0	-36.1	-14.94	-	-	-7	-7.94	272	118	H
			5.925	-42.55	RMS	35.4	11.8	0	-36.1	-31.45	-27	-4.45	-	-	272	118	H
			5.920401	-25.63	Pk	35.3	11.8	0	-36.04	-14.57	-	-	-7	-7.57	223	171	V
			5.924868	-42.7	RMS	35.4	11.8	0	-36.1	-31.6	-27	-4.6	-	-	223	171	V
			5.925	-26.9	Pk	35.4	11.8	0	-36.1	-15.8	-	-	-7	-8.8	223	171	V
			5.925	-44.03	RMS	35.4	11.8	0	-36.1	-32.93	-27	-5.93	-	-	223	171	V
EHT80 (SU Mode)	5985	6 + 5	5.923268	-42.45	RMS	35.3	11.8	0	-36.1	-31.45	-27	-4.45	-	-	272	116	H
			5.923801	-24.18	Pk	35.3	11.8	0	-36.1	-13.18	-	-	-7	-6.18	272	116	H
			5.925	-29.95	Pk	35.4	11.8	0	-36.1	-18.85	-	-	-7	-11.85	272	116	H
			5.925	-47.95	RMS	35.4	11.8	0	-36.1	-36.85	-27	-9.85	-	-	272	116	H
			5.901468	-46.52	RMS	35.3	11.8	0	-36.2	-35.62	-27	-8.62	-	-	172	162	V
			5.916401	-28.01	Pk	35.3	11.8	0	-36	-16.91	-	-	-7	-9.91	172	162	V
			5.925	-33.11	Pk	35.4	11.8	0	-36.1	-22.01	-	-	-7	-15.01	172	162	V
			5.925	-50.31	RMS	35.4	11.8	0	-36.1	-39.21	-27	-12.21	-	-	172	162	V
EHT160 (SU Mode)	6025	6 + 5	5.891001	-46	RMS	35.2	11.8	0.14	-36.3	-35.16	-27	-8.16	-	-	149	111	H
			5.900535	-29.02	Pk	35.3	11.8	0	-36.2	-18.12	-	-	-7	-11.12	149	111	H
			5.925	-37.48	Pk	35.4	11.8	0	-36.1	-26.38	-	-	-7	-19.38	149	111	H
			5.925	-53.7	RMS	35.4	11.8	0.14	-36.1	-42.46	-27	-15.46	-	-	149	111	H
			5.900735	-25.9	Pk	35.3	11.8	0	-36.2	-15	-	-	-7	-8	215	102	V
			5.900735	-41.49	RMS	35.3	11.8	0.14	-36.2	-30.45	-27	-3.45	-	-	215	102	V
			5.925	-29.88	Pk	35.4	11.8	0	-36.1	-18.78	-	-	-7	-11.78	215	102	V
			5.925	-50.21	RMS	35.4	11.8	0.14	-36.1	-38.97	-27	-11.97	-	-	215	102	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

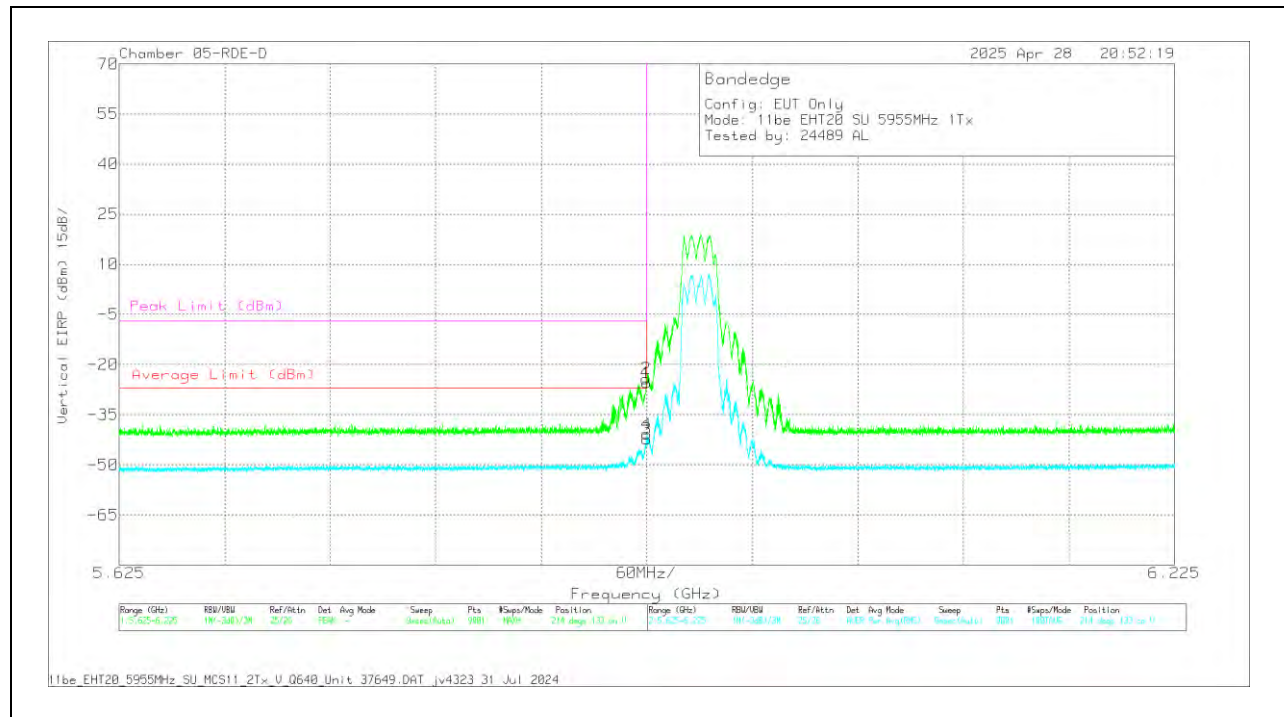
ADR - U-NII: AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU Mode**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.925	-36.43	PK	35.3	11.8	0	-37.72	-27.05	-	-	-7	-20.05	168	108	H
2	5.924202	-35.35	PK	35.3	11.8	0	-37.7	-25.95	-	-	-7	-18.95	168	108	H
3	5.925	-52.9	RMS	35.3	11.8	0	-37.72	-43.52	-27	-16.52	-	-	168	108	H
4	5.924935	-52.68	RMS	35.3	11.8	0	-37.72	-43.3	-27	-16.3	-	-	168	108	H

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.925	-34.86	Pk	35.3	11.8	0	-37.72	-25.48	-	-	-7	-18.48	214	133	V
2	5.924735	-33.63	Pk	35.3	11.8	0	-37.71	-24.24	-	-	-7	-17.24	214	133	V
3	5.925	-51.6	RMS	35.3	11.8	0	-37.72	-42.22	-27	-15.22	-	-	214	133	V
4	5.924868	-50.23	RMS	35.3	11.8	0	-37.72	-40.85	-27	-13.85	-	-	214	133	V

Pk - Peak detector

RMS - RMS detection

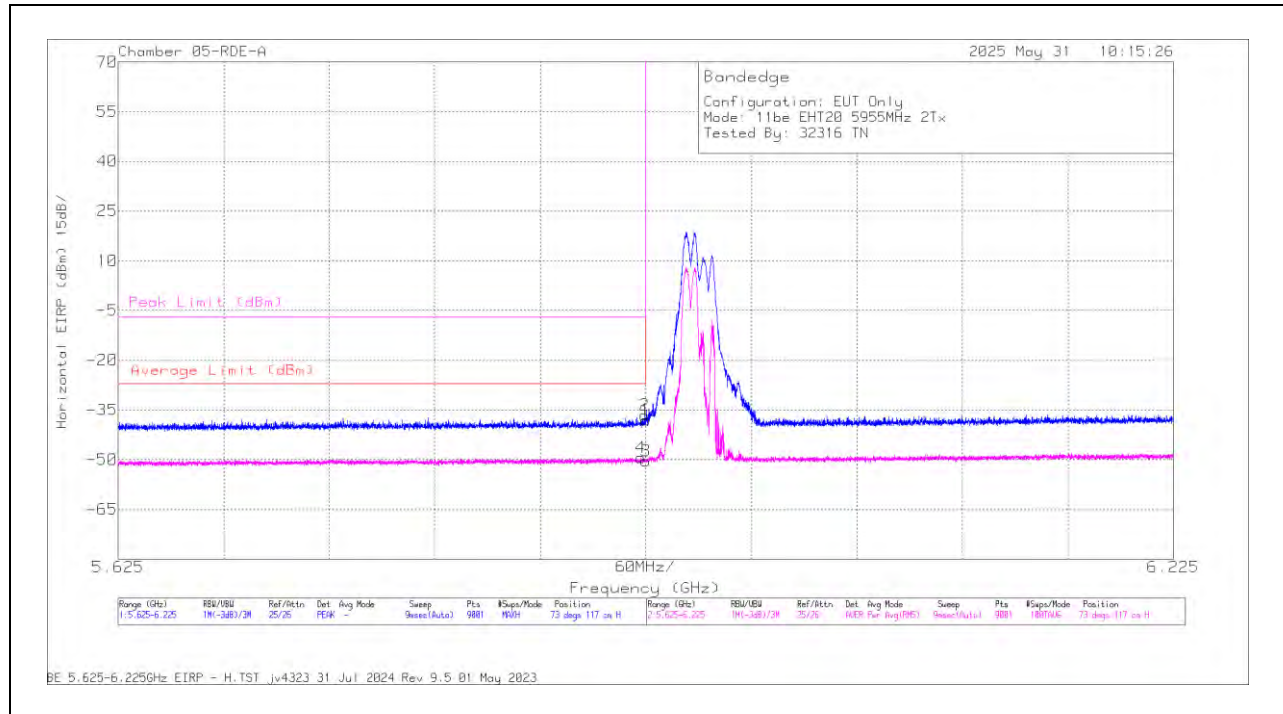
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106/ Index 53)	5955	6+5	5.922135	-60.35	RMS	35.3	11.8	0	-36.1	-49.35	-27	-22.35	-	-	73	117	H
			5.924402	-47.57	Pk	35.3	11.8	0	-36.1	-36.57	-	-	-7	-29.57	73	117	H
			5.925	-49.12	Pk	35.4	11.8	0	-36.1	-38.02	-	-	-7	-31.02	73	117	H
			5.925	-61.45	RMS	35.4	11.8	0	-36.1	-50.35	-27	-23.35	-	-	73	117	H
			5.918135	-60.29	RMS	35.3	11.8	0	-36	-49.19	-27	-22.19	-	-	58	112	V
			5.924735	-47.94	Pk	35.4	11.8	0	-36.1	-36.84	-	-	-7	-29.84	58	112	V
			5.925	-48.31	Pk	35.4	11.8	0	-36.1	-37.21	-	-	-7	-30.21	58	112	V
EHT20 (RU 52/ Index 37)	5955	6+5	5.925	-60.43	RMS	35.4	11.8	0	-36.1	-49.33	-27	-22.33	-	-	58	112	V
			5.910468	-60.21	RMS	35.3	11.8	0	-36.2	-49.31	-27	-22.31	-	-	155	216	H
			5.924202	-46.08	Pk	35.3	11.8	0	-36.1	-35.08	-	-	-7	-28.08	155	216	H
			5.925	-46.76	Pk	35.4	11.8	0	-36.1	-35.66	-	-	-7	-28.66	155	216	H
			5.925	-60.94	RMS	35.4	11.8	0	-36.1	-49.84	-27	-22.84	-	-	155	216	H
			5.750334	-46.94	Pk	35	11.8	0	-36.6	-36.74	-	-	-7	-29.74	191	197	V
			5.896935	-59.67	RMS	35.3	11.8	0	-36.3	-48.87	-27	-21.87	-	-	191	197	V
EHT40 (MRU 106+26/ Index 82)	5965	6+5	5.925	-49.95	Pk	35.4	11.8	0	-36.1	-38.85	-	-	-7	-31.85	191	197	V
			5.925	-61.41	RMS	35.4	11.8	0	-36.1	-50.31	-27	-23.31	-	-	191	197	V
			5.925	-50.9	Pk	35	11.8	0	-34.9	-39	-	-	-7	-32	155	227	H
			5.918401	-49.73	Pk	35	11.8	0	-34.9	-37.83	-	-	-7	-30.83	155	227	H
			5.925	-62.5	RMS	35	11.8	0	-34.9	-50.6	-27	-23.60	-	-	155	227	H
			5.808134	-61.04	RMS	34.7	11.8	0	-34.6	-49.14	-27	-22.14	-	-	155	227	H
			5.925	-48.4	Pk	35	11.8	0	-34.9	-36.5	-	-	-7	-29.5	166	126	V
EHT40 (MRU 26/ Index 17)	5965	6+5	5.924002	-48.82	Pk	35	11.8	0	-34.8	-36.82	-	-	-7	-29.82	166	126	V
			5.925	-62.72	RMS	35	11.8	0	-34.9	-50.82	-27	-23.82	-	-	166	126	V
			5.887468	-61.16	RMS	34.9	11.8	0	-34.75	-49.21	-27	-22.21	-	-	166	126	V
			5.924735	-58.74	RMS	35.4	11.8	0	-36.1	-47.64	-27	-20.64	-	-	62	219	H
			5.924935	-37.42	Pk	35.4	11.8	0	-36.1	-26.32	-	-	-7	-19.32	62	219	H
			5.925	-37.12	Pk	35.4	11.8	0	-36.1	-26.02	-	-	-7	-19.02	62	219	H
			5.925	-60.51	RMS	35.4	11.8	0	-36.1	-49.41	-27	-22.41	-	-	62	219	H
EHT80 (MRU 106+26 / Index 82)	5985	6+5	5.921335	-57.86	RMS	35.3	11.8	0	-36.1	-46.86	-27	-19.86	-	-	46	104	V
			5.924935	-36.02	Pk	35.4	11.8	0	-36.1	-24.92	-	-	-7	-17.92	46	104	V
			5.925	-36.02	Pk	35.4	11.8	0	-36.1	-24.92	-	-	-7	-17.92	46	104	V
			5.925	-60.49	RMS	35.4	11.8	0	-36.1	-49.39	-27	-22.39	-	-	46	104	V
			* 7.33989	-48.34	Pk	35.6	11.8	0	-35.6	-36.54	-	-	-21.2	-15.34	260	149	H
			* 7.390291	-60.2	RMS	35.6	11.8	0	-35.5	-48.3	-41.2	-7.1	-	-	260	149	H
			7.125	-51.59	Pk	35.7	11.8	0	-35.7	-39.79	-	-	-7	-32.79	260	149	H
EHT80 (RU 106/ Index 53)	5985	6+5	7.125	-62.26	RMS	35.7	11.8	0	-35.7	-50.46	-27	-23.46	-	-	260	149	H
			* 7.346813	-48.87	Pk	35.6	11.8	0	-35.4	-36.87	-	-	-21.2	-15.67	216	177	V
			* 7.26569	-60.72	RMS	35.6	11.8	0	-35.17	-48.49	-41.2	-7.29	-	-	216	177	V
			7.125	-50.09	Pk	35.7	11.8	0	-35.7	-38.29	-	-	-7	-31.29	216	177	V
			7.125	-61.52	RMS	35.7	11.8	0	-35.7	-49.72	-27	-22.72	-	-	216	177	V
			5.924202	-40.73	Pk	35.2	11.8	0	-36.04	-29.77	-	-	-7	-22.77	338	110	H
			5.924402	-60.58	RMS	35.2	11.8	0	-36.08	-49.66	-27	-22.66	-	-	338	110	H
EHT160 (MRU 106+26 / Index 82)	6025	6+5	5.925	-42.11	Pk	35.2	11.8	0	-36.2	-31.31	-	-	-7	-24.31	338	110	H
			5.925	-62.68	RMS	35.2	11.8	0	-36.2	-51.88	-27	-24.88	-	-	338	110	H
			5.824134	-61.37	RMS	35	11.8	0	-36.21	-50.78	-27	-23.78	-	-	22	104	V
			5.924668	-41.27	Pk	35.2	11.8	0	-36.13	-30.4	-	-	-7	-23.4	22	104	V
			5.925	-42.12	Pk	35.2	11.8	0	-36.2	-31.32	-	-	-7	-24.32	22	104	V
			5.925	-62.31	RMS	35.2	11.8	0	-36.2	-51.51	-27	-24.51	-	-	22	104	V
			5.925	-51.01	Pk	35.4	11.8	0	-37.5	-41.31	-	-	-7	-34.31	284	268	H
EHT160 (RU 106/ Index 53)	6025	6+5	5.878668	-47.35	Pk	35.4	11.8	0	-37.58	-37.73	-	-	-7	-30.73	284	268	H
			5.925	-61.02	RMS	35.4	11.8	0	-37.5	-51.32	-27	-24.32	-	-	284	268	H
			5.871535	-59.58	RMS	35.4	11.8	0	-37.6	-49.98	-27	-22.98	-	-	284	268	H
			5.925	-49.92	Pk	35.4	11.8	0	-37.5	-40.22	-	-	-7	-33.22	264	285	V
			5.881068	-47.78	Pk	35.4	11.8	0	-37.56	-38.14	-	-	-7	-31.14	264	285	V
			5.925	-61.47	RMS	35.4	11.8	0	-37.5	-51.77	-27	-24.77	-	-	264	285	V
			5.906601	-59.78	RMS	35.4	11.8	0	-37.55	-50.13	-27	-23.13	-	-	264	285	V
EHT160 (RU 106/ Index 53)	6025	6+5	5.847068	-50.01	Pk	35	11.8	0	-35.72	-38.93	-	-	-7	-31.93	313	103	H
			5.921735	-61.61	RMS	35.2	11.8	0	-35.98	-50.59	-27	-23.59	-	-	313	103	H
			5.925	-52.2	Pk	35.2	11.8	0	-36.2	-41.4	-	-	-7	-34.4	313	103	H
			5.925	-62.7	RMS	35.2	11.8	0	-36.2	-51.9	-27	-24.9	-	-	313	103	H
			5.812868	-61.5	RMS	34.9	11.8	0	-35.71	-50.51	-27	-23.51	-	-	15	101	V
			5.901535	-49.51	Pk	35.1	11.8	0	-35.89	-38.5	-	-	-7	-31.5	15	101	V
			5.925	-51.58	Pk	35.2	11.8	0	-36.2	-40.78	-	-	-7	-33.78	15	101	V
EHT160 (RU 106/ Index 53)	6025	6+5	5.925	-62.48	RMS	35.2	11.8	0	-36.2	-51.68	-27	-24.68	-	-	15	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

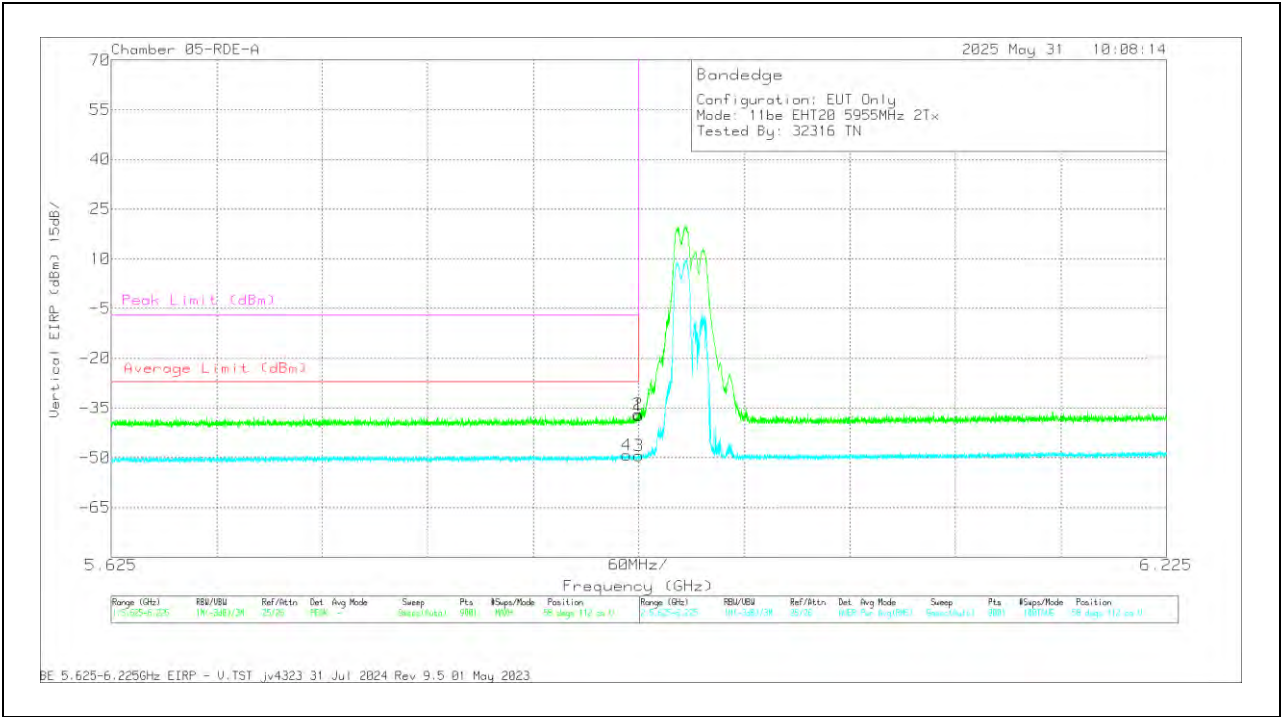
ADR - U-NII: AD primary method, RMS average

2TX Antenna 6 + Antenna 5 OFDMA MODE: 106-Tones, RU Index 53**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80403 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.922135	-60.35	RMS	35.3	11.8	0	-36.1	-49.35	-27	-22.35	-	-	73	117	H
2	5.924402	-47.57	Pk	35.3	11.8	0	-36.1	-36.57	-	-	-7	-29.57	73	117	H
1	5.925	-49.12	Pk	35.4	11.8	0	-36.1	-38.02	-	-	-7	-31.02	73	117	H
3	5.925	-61.45	RMS	35.4	11.8	0	-36.1	-50.35	-27	-23.35	-	-	73	117	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80403 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.918135	-60.29	RMS	35.3	11.8	0	-36	-49.19	-27	-22.19	-	-	58	112	V
2	5.924735	-47.94	PK	35.4	11.8	0	-36.1	-36.84	-	-	-7	-29.84	58	112	V
1	5.925	-48.31	PK	35.4	11.8	0	-36.1	-37.21	-	-	-7	-30.21	58	112	V
3	5.925	-60.43	RMS	35.4	11.8	0	-36.1	-49.33	-27	-22.33	-	-	58	112	V

PK - Peak detector
RMS - RMS detection

1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS

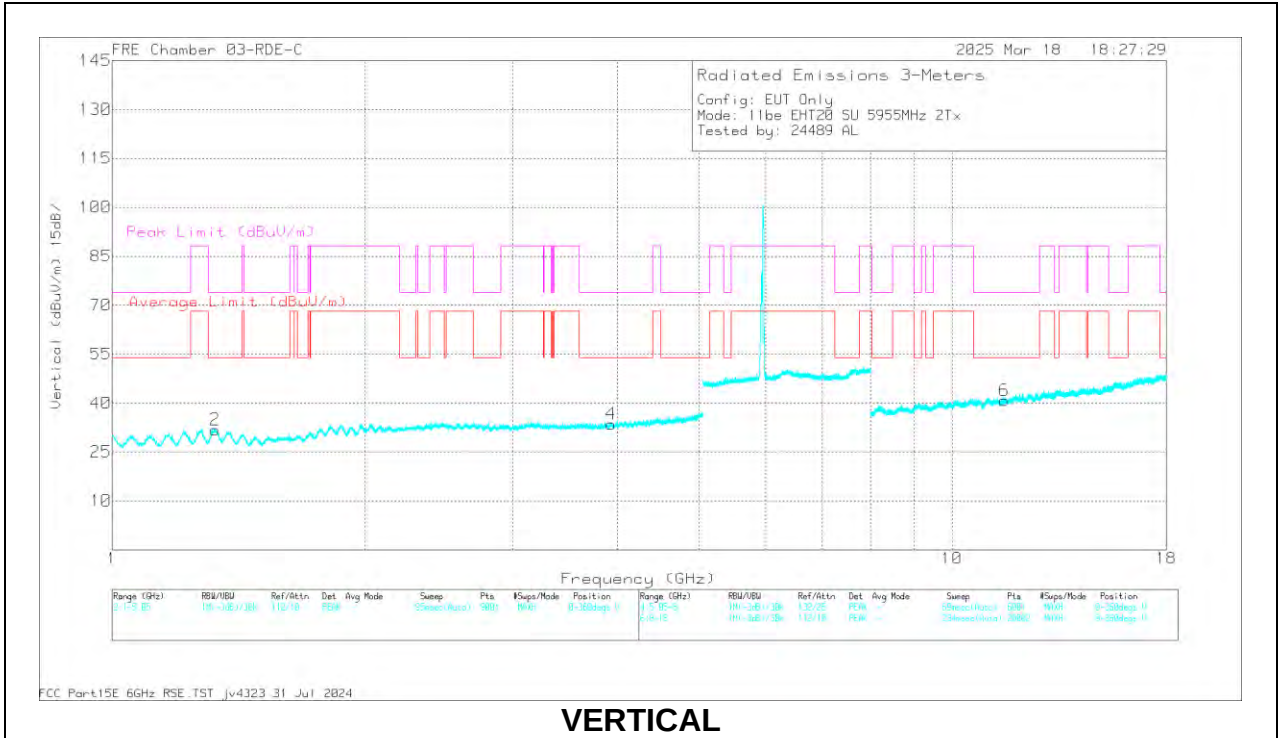
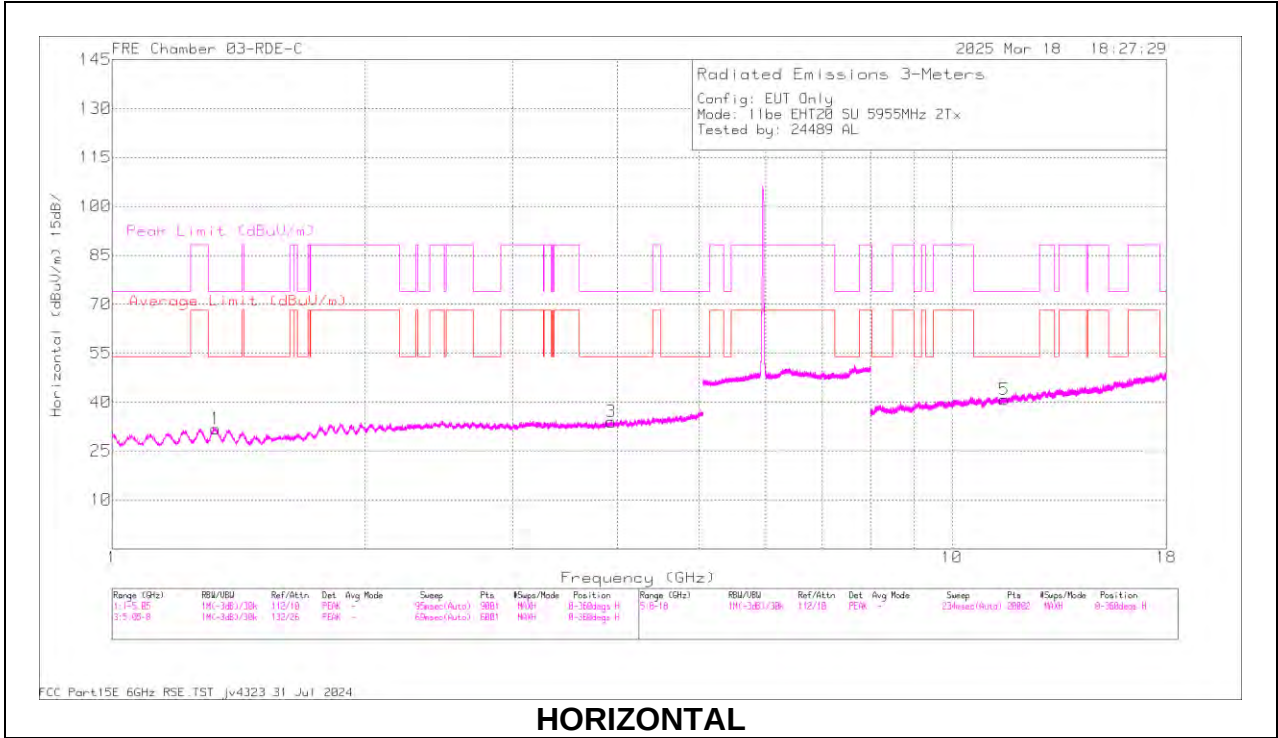
20MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/FI tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5955	6 + 5	* 1.328258	60.84	PK-U	29.3	0	-47.8	42.34	-	-	74	-31.66	360	101	H
			* 1.326693	48.96	ADR	29.3	0	-47.8	30.46	54	-23.54	-	-	360	101	H
			* 3.926089	56.6	PK-U	33.3	0	-45.8	44.1	-	-	74	-29.9	360	101	H
			* 3.925438	44.95	ADR	33.3	0	-45.86	32.39	54	-21.61	-	-	360	101	H
			* 1.32559	60.87	PK-U	29.3	0	-47.8	42.37	-	-	74	-31.63	360	101	V
			* 1.327669	49.04	ADR	29.3	0	-47.8	30.54	54	-23.46	-	-	360	101	V
			* 3.932649	57	PK-U	33.3	0	-45.8	44.5	-	-	74	-29.5	360	199	V
			* 3.931037	45.06	ADR	33.3	0	-45.8	32.56	54	-21.44	-	-	360	199	V
			* 11.53997	56.23	PK-U	38.3	0	-43.1	51.43	-	-	74	-22.57	360	199	H
			* 11.540207	44.43	ADR	38.3	0	-43.1	39.63	54	-14.37	-	-	360	199	H
			* 11.538928	56.15	PK-U	38.3	0	-43.11	51.34	-	-	74	-22.66	360	199	V
			* 11.538973	44.31	ADR	38.3	0	-43.1	39.51	54	-14.49	-	-	360	199	V
	6175	6 + 5	* 1.222826	60.4	PK-U	29	0	-48	41.4	-	-	74	-32.6	0	200	H
			* 1.222369	48.66	ADR	29	0	-48	29.66	54	-24.34	-	-	0	200	H
			* 3.904533	56.15	PK-U	33.2	0	-45.8	43.55	-	-	74	-30.45	0	200	H
			* 3.902295	44.77	ADR	33.2	0	-45.9	32.07	54	-21.93	-	-	0	200	H
			* 1.223322	60.35	PK-U	29	0	-48	41.35	-	-	74	-32.65	0	200	V
			* 1.219996	48.85	ADR	28.9	0	-48.1	29.65	54	-24.35	-	-	0	200	V
			* 3.903295	55.98	PK-U	33.2	0	-45.87	43.31	-	-	74	-30.69	0	200	V
			* 3.904702	44.52	ADR	33.2	0	-45.8	31.92	54	-22.08	-	-	0	200	V
			* 11.44208	55.7	PK-U	38.2	0	-43.79	50.11	-	-	74	-23.89	0	101	H
			* 11.44151	44.22	ADR	38.2	0	-43.8	38.62	54	-15.38	-	-	0	101	H
			* 11.444996	55.49	PK-U	38.2	0	-43.7	49.99	-	-	74	-24.01	0	199	V
			* 11.442785	44.3	ADR	38.2	0	-43.72	38.78	54	-15.22	-	-	0	199	V
	6415	6 + 5	* 1.27053	60.58	PK-U	29.3	0	-47.9	41.98	-	-	88.2	-46.22	0	200	H
			* 1.270378	48.64	ADR	29.3	0	-47.9	30.04	68.2	-38.16	-	-	0	200	H
			* 3.962854	55.61	PK-U	33.4	0	-45.8	43.21	-	-	74	-30.79	0	200	H
			* 3.961693	44.29	ADR	33.4	0	-45.8	31.89	54	-22.11	-	-	0	200	H
			* 1.270458	60.37	PK-U	29.3	0	-47.9	41.77	-	-	88.2	-46.43	0	101	V
			* 1.270918	48.69	ADR	29.3	0	-47.9	30.09	68.2	-38.11	-	-	0	101	V
			* 3.96626	56.15	PK-U	33.4	0	-45.7	43.85	-	-	74	-30.15	0	200	V
			* 3.963706	44.29	ADR	33.4	0	-45.73	31.96	54	-22.04	-	-	0	200	V
			* 11.384854	56.1	PK-U	38.2	0	-43.5	50.8	-	-	74	-23.2	0	101	H
			* 11.383835	44.3	ADR	38.2	0	-43.5	39	54	-15	-	-	0	101	H
			* 11.382217	55.68	PK-U	38.2	0	-43.5	50.38	-	-	74	-23.62	0	198	V
			* 11.383064	44.06	ADR	38.2	0	-43.5	38.76	54	-15.24	-	-	0	198	V
11be (106T / Highest PSD)	5955	6 + 5	8.996837	53.87	PK-U	35.9	0	-42.1	47.67	-	-	88.2	-40.53	0	200	H
			8.997839	42.31	ADR	35.9	0	-42.1	36.11	68.2	-32.09	-	-	0	200	H
			* 11.92112	52.74	PK-U	38.5	0	-40.9	50.34	-	-	74	-23.66	0	101	H
			* 11.918799	40.94	ADR	38.5	0	-40.88	38.56	54	-15.44	-	-	0	101	H
			* 17.790198	55.31	PK-U	41.3	0	-39.3	57.31	-	-	74	-16.69	266	103	H
			* 17.786975	43.98	ADR	41.3	0	-39.3	45.98	54	-8.02	-	-	266	103	H
			8.999724	54.05	PK-U	35.9	0	-42.1	47.85	-	-	88.2	-40.35	266	199	V
			8.998422	42.18	ADR	35.9	0	-42.1	35.98	68.2	-32.22	-	-	266	199	V
			* 11.918522	52.89	PK-U	38.5	0	-40.85	50.54	-	-	74	-23.46	266	199	V
			* 11.918621	40.9	ADR	38.5	0	-40.86	38.54	54	-15.46	-	-	266	199	V
			* 17.788964	55.26	PK-U	41.3	0	-39.3	57.26	-	-	74	-16.74	266	101	V
			* 17.788059	43.98	ADR	41.3	0	-39.3	45.98	54	-8.02	-	-	266	101	V
	6175	6 + 5	* 9.014598	53.82	PK-U	35.9	0	-42.3	47.42	-	-	74	-26.58	360	101	H
			* 9.012875	42.32	ADR	35.9	0	-42.3	35.92	54	-18.08	-	-	360	101	H
			* 12.334599	52.56	PK-U	38.6	0	-39.9	51.26	-	-	74	-22.74	360	101	H
			* 12.334423	40.8	ADR	38.6	0	-39.9	39.5	54	-14.5	-	-	360	101	H
			* 17.999061	55.24	PK-U	41.1	0	-40.2	56.14	-	-	74	-17.86	360	101	H
			* 17.9994	44.06	ADR	41.1	0	-40.2	44.96	54	-9.04	-	-	360	101	H
			* 9.011496	53.62	PK-U	35.9	0	-42.3	47.22	-	-	74	-26.78	360	101	V
			* 9.012725	41.92	ADR	35.9	0	-42.3	35.52	54	-18.48	-	-	360	101	V
			* 12.335387	52.24	PK-U	38.6	0	-39.9	50.94	-	-	74	-23.06	360	101	V
			* 12.339045	40.7	ADR	38.6	0	-39.9	39.4	54	-14.6	-	-	360	101	V
			* 17.996828	55.76	PK-U	41.1	0	-40.2	56.66	-	-	74	-17.34	360	101	V
			* 17.997984	43.83	ADR	41.1	0	-40.2	44.73	54	-9.27	-	-	360	101	V
	6415	6 + 5	* 9.025954	53.99	PK-U	35.9	0	-42.5	47.39	-	-	74	-26.61	360	101	H
			* 9.025748	42.15	ADR	35.9	0	-42.47	35.58	54	-18.42	-	-	360	101	H
			12.807892	52.97	PK-U	38.9	0	-40.8	51.07	-	-	88.2	-37.13	360	101	H
			12.808124	41.35	ADR	38.9	0	-40.8	39.45	68.2	-28.75	-	-	360	101	H
			* 17.999539	55.72	PK-U	41.1	0	-40.2	56.62	-	-	74	-17.38	360	101	H
			* 17.997998	43.97	ADR	41.1	0	-40.2	44.87	54	-9.13	-	-	360	101	H
			* 9.028716	53.34	PK-U	35.9	0	-42.5	46.74	-	-	74	-27.26	360	101	V
			* 9.029459	42.06	ADR	35.9	0	-42.5	35.46	54	-18.54	-	-	360	101	V
			12.812717	52.8	PK-U	38.9	0	-40.7	51	-	-	88.2	-37.2	360	200	V
			12.812289	40.99	ADR	38.9	0	-40.7	39.19	68.2	-29.01	-	-	360	200	V
			* 17.997808	55.66	PK-U	41.1	0	-40.2	56.56	-	-	74	-17.44	360	101	V
			* 17.997105	43.93	ADR	41.1	0	-40.2	44.83	54	-9.17	-	-	360	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5955MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.328258	60.84	PK-U	29.3	0	-47.8	42.34	-	-	74	-31.66	360	101	H
	* 1.326693	48.96	ADR	29.3	0	-47.8	30.46	54	-23.54	-	-	360	101	H
3	* 3.926089	56.6	PK-U	33.3	0	-45.8	44.1	-	-	74	-29.9	360	101	H
	* 3.925438	44.95	ADR	33.3	0	-45.86	32.39	54	-21.61	-	-	360	101	H
2	* 1.32559	60.87	PK-U	29.3	0	-47.8	42.37	-	-	74	-31.63	360	101	V
	* 1.327669	49.04	ADR	29.3	0	-47.8	30.54	54	-23.46	-	-	360	101	V
4	* 3.932649	57	PK-U	33.3	0	-45.8	44.5	-	-	74	-29.5	360	199	V
	* 3.931037	45.06	ADR	33.3	0	-45.8	32.56	54	-21.44	-	-	360	199	V
5	* 11.53997	56.23	PK-U	38.3	0	-43.1	51.43	-	-	74	-22.57	360	199	H
	* 11.54020	44.43	ADR	38.3	0	-43.1	39.63	54	-14.37	-	-	360	199	H
6	* 11.53892	56.15	PK-U	38.3	0	-43.11	51.34	-	-	74	-22.66	360	199	V
	* 11.53897	44.31	ADR	38.3	0	-43.1	39.51	54	-14.49	-	-	360	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

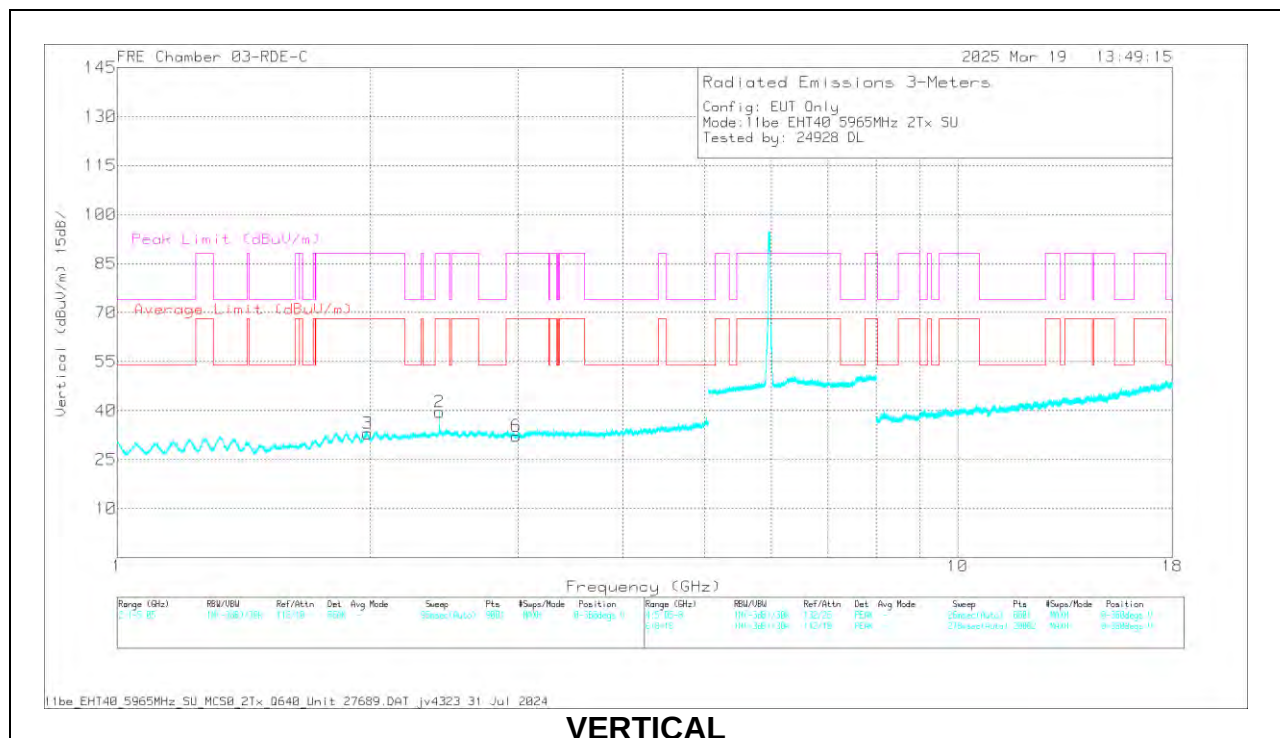
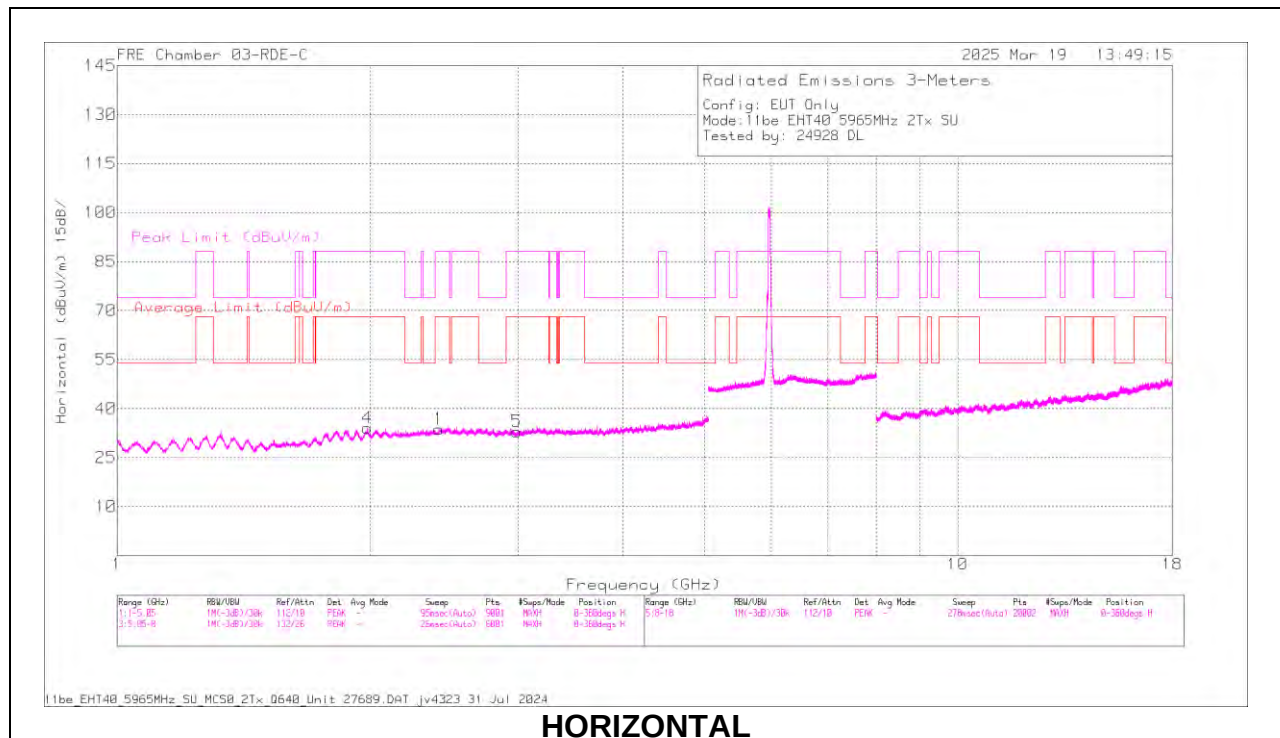
40MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5965	6 + 5	1.982715	48.49	ADR	31.1	0	-47.9	31.69	68.2	-36.51	-	-	118	113	H
			1.983947	60	PK-U	31.1	0	-47.9	43.2	-	-	88.2	-45	118	113	H
			1.983955	48.35	ADR	31.1	0	-47.9	31.55	68.2	-36.65	-	-	82	303	V
			1.984376	59.93	PK-U	31.1	0	-47.94	43.09	-	-	88.2	-45.11	82	303	V
			2.416198	59.97	PK-U	32.2	0	-48.32	43.85	-	-	88.2	-44.35	5	145	H
			2.418406	47.95	ADR	32.2	0	-48.4	31.75	68.2	-36.45	-	-	5	145	H
			2.419934	59.56	PK-U	32.2	0	-48.4	43.36	-	-	88.2	-44.84	168	238	V
			2.420445	47.97	ADR	32.2	0	-48.36	31.81	68.2	-36.39	-	-	168	238	V
			2.984676	45.08	ADR	32.3	0	-46.53	30.85	68.2	-37.35	-	-	347	335	V
	6165	6 + 5	2.985407	56.67	PK-U	32.3	0	-46.5	42.47	-	-	88.2	-45.73	347	335	V
			2.990089	56.89	PK-U	32.3	0	-46.4	42.79	-	-	88.2	-45.41	293	238	H
			2.992131	44.99	ADR	32.4	0	-46.4	30.99	68.2	-37.21	-	-	293	238	H
			* 12.331617	56	PK-U	38.9	0	-42.94	51.96	-	-	74	-22.04	138	390	H
			* 12.33176	44.18	ADR	38.9	0	-42.92	40.16	54	-13.84	-	-	138	390	H
			* 12.336599	55.71	PK-U	38.9	0	-42.8	51.81	-	-	74	-22.19	50	348	V
			* 12.335308	43.87	ADR	38.9	0	-42.87	39.9	54	-14.1	-	-	50	348	V
			2.049793	47.12	ADR	31.2	0	-47.9	30.42	68.2	-37.78	-	-	101	110	V
			2.050441	59.21	PK-U	31.2	0	-47.9	42.51	-	-	88.2	-45.69	101	110	V
	6405	6 + 5	2.052105	47.06	ADR	31.2	0	-47.9	30.36	68.2	-37.84	-	-	300	213	H
			2.055051	58.99	PK-U	31.2	0	-47.91	42.28	-	-	88.2	-45.92	300	213	H
			3.077112	45.25	ADR	32.7	0	-46.5	31.45	68.2	-36.75	-	-	41	113	V
			3.079286	56.87	PK-U	32.7	0	-46.47	43.1	-	-	88.2	-45.1	41	113	V
			3.081973	56.97	PK-U	32.7	0	-46.4	43.27	-	-	88.2	-44.93	315	272	H
			3.083096	45.23	ADR	32.7	0	-46.4	31.53	68.2	-36.67	-	-	315	272	H
			* 1330.015	46.06	PK-U	29.2	0	-28	47.26	-	-	74	-26.74	360	100	H
			* 1359.102	34.31	ADR	29	0	-27.99	35.32	54	-18.68	-	-	360	100	H
			* 3910.308	45.66	PK-U	33.9	0	-25.65	53.91	-	-	74	-20.09	360	100	H
			* 3895.667	33.97	ADR	33.9	0	-25.79	42.08	54	-11.92	-	-	360	100	H
			* 1327.096	46.33	PK-U	29.2	0	-28.03	47.5	-	-	74	-26.5	360	201	V
			* 1331.412	34.26	ADR	29.2	0	-27.99	35.47	54	-18.53	-	-	360	201	V
			* 3893.341	45.49	PK-U	33.9	0	-25.84	53.55	-	-	74	-20.45	360	200	V
			* 3913.097	34.01	ADR	33.9	0	-25.61	42.3	54	-11.7	-	-	360	200	V
			* 11593.872	56.76	PK-U	38.4	0	-45.4	49.76	-	-	74	-24.24	360	100	H
			* 11616.247	45.05	ADR	38.5	0	-45.21	38.34	54	-15.66	-	-	360	100	H
			* 11590.812	57.02	PK-U	38.4	0	-45.43	49.99	-	-	74	-24.01	360	201	V
			* 11616.669	45.18	ADR	38.5	0	-45.22	38.46	54	-15.54	-	-	360	201	V
11be (106+26T Mode / Highest PSD)	5965	6 + 5	* 9.012101	53.46	PK-U	35.9	0	-42.3	47.06	-	-	74	-26.94	3	101	H
			* 9.010928	41.95	ADR	35.9	0	-42.3	35.55	54	-18.45	-	-	3	101	H
			* 11.943569	51.62	PK-U	38.6	0	-41.2	49.02	-	-	74	-24.98	3	200	H
			* 11.940851	40.51	ADR	38.6	0	-41.2	37.91	54	-16.09	-	-	3	200	H
			* 17.905333	55.38	PK-U	41.2	0	-41.03	55.55	-	-	74	-18.45	3	101	H
			* 17.903002	44.01	ADR	41.2	0	-41	44.21	54	-9.79	-	-	3	101	H
			* 9.01236	54.22	PK-U	35.9	0	-42.3	47.82	-	-	74	-26.18	3	101	V
			* 9.011073	41.91	ADR	35.9	0	-42.3	35.51	54	-18.49	-	-	3	101	V
			* 11.943084	52.18	PK-U	38.6	0	-41.2	49.58	-	-	74	-24.42	3	101	V
			* 11.940306	40.57	ADR	38.5	0	-41.2	37.87	54	-16.13	-	-	3	101	V
			* 17.905937	55.42	PK-U	41.2	0	-41.09	55.53	-	-	74	-18.47	3	200	V
			* 17.90891	44	ADR	41.2	0	-41.1	44.1	54	-9.9	-	-	3	200	V
	6165	6 + 5	* 9.008514	53.46	PK-U	35.9	0	-42.2	47.16	-	-	74	-26.84	360	101	H
			* 9.009592	41.9	ADR	35.9	0	-42.26	35.54	54	-18.46	-	-	360	101	H
			* 12.33841	52.4	PK-U	38.6	0	-39.9	51.1	-	-	74	-22.9	360	200	H
			* 12.33537	40.55	ADR	38.6	0	-39.9	39.25	54	-14.75	-	-	360	200	H
			* 17.93648	55.43	PK-U	41.2	0	-40.8	55.83	-	-	74	-18.17	360	200	H
			* 17.937425	43.7	ADR	41.2	0	-40.84	44.06	54	-9.94	-	-	360	200	H
			* 9.010579	53.47	PK-U	35.9	0	-42.3	47.07	-	-	74	-26.93	360	200	V
			* 9.010689	42	ADR	35.9	0	-42.3	35.6	54	-18.4	-	-	360	200	V
			* 12.336277	52.11	PK-U	38.6	0	-39.9	50.81	-	-	74	-23.19	360	200	V
			* 12.335308	40.68	ADR	38.6	0	-39.9	39.38	54	-14.62	-	-	360	200	V
			* 17.940296	55.49	PK-U	41.2	0	-40.9	55.79	-	-	74	-18.21	360	200	V
			* 17.940355	43.95	ADR	41.2	0	-40.9	44.25	54	-9.75	-	-	360	200	V
	6405	6 + 5	* 9.025604	53.42	PK-U	35.9	0	-42.46	46.86	-	-	74	-27.14	3	101	H
			* 9.023497	41.98	ADR	35.9	0	-42.4	35.48	54	-18.52	-	-	3	101	H
			12.810927	52.57	PK-U	38.9	0	-40.8	50.67	-	-	88.2	-37.53	3	200	H
			12.812153	41.16	ADR	38.9	0	-40.7	39.36	68.2	-28.84	-	-	3	200	H
			* 17.935234	55.48	PK-U	41.2	0	-40.8	55.88	-	-	74	-18.12	3	200	H
			* 17.936615	43.78	ADR	41.2	0	-40.8	44.18	54	-9.82	-	-	3	200	H
			* 9.025992	53.75	PK-U	35.9	0	-42.5	47.15	-	-	74	-26.85	3	200	V
			* 9.023045	41.92	ADR	35.9	0	-42.4	35.42	54	-18.58	-	-	3	200	V
			12.812335	52.66	PK-U	38.9	0	-40.7	50.86	-	-	88.2	-37.34	3	101	V
			12.812314	41.08	ADR	38.9	0	-40.7	39.28	68.2	-28.92	-	-	3	101	V
			* 17.937621	55.54	PK-U	41.2	0	-40.86	55.88	-	-	74	-18.12	3	200	V
			* 17.939333	43.74	ADR	41.2	0	-40.9	44.04	54	-9.96	-	-	3	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5965MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.982715	48.49	ADR	31.1	0	-47.9	31.69	68.2	-36.51	-	-	118	113	H
	1.983947	60	PK-U	31.1	0	-47.9	43.2	-	-	88.2	-45	118	113	H
3	1.983955	48.35	ADR	31.1	0	-47.9	31.55	68.2	-36.65	-	-	82	303	V
	1.984376	59.93	PK-U	31.1	0	-47.94	43.09	-	-	88.2	-45.11	82	303	V
1	2.416198	59.97	PK-U	32.2	0	-48.32	43.85	-	-	88.2	-44.35	5	145	H
	2.418406	47.95	ADR	32.2	0	-48.4	31.75	68.2	-36.45	-	-	5	145	H
2	2.419934	59.56	PK-U	32.2	0	-48.4	43.36	-	-	88.2	-44.84	168	238	V
	2.420445	47.97	ADR	32.2	0	-48.36	31.81	68.2	-36.39	-	-	168	238	V
6	2.984676	45.08	ADR	32.3	0	-46.53	30.85	68.2	-37.35	-	-	347	335	V
	2.985407	56.67	PK-U	32.3	0	-46.5	42.47	-	-	88.2	-45.73	347	335	V
5	2.990089	56.89	PK-U	32.3	0	-46.4	42.79	-	-	88.2	-45.41	293	238	H
	2.992131	44.99	ADR	32.4	0	-46.4	30.99	68.2	-37.21	-	-	293	238	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

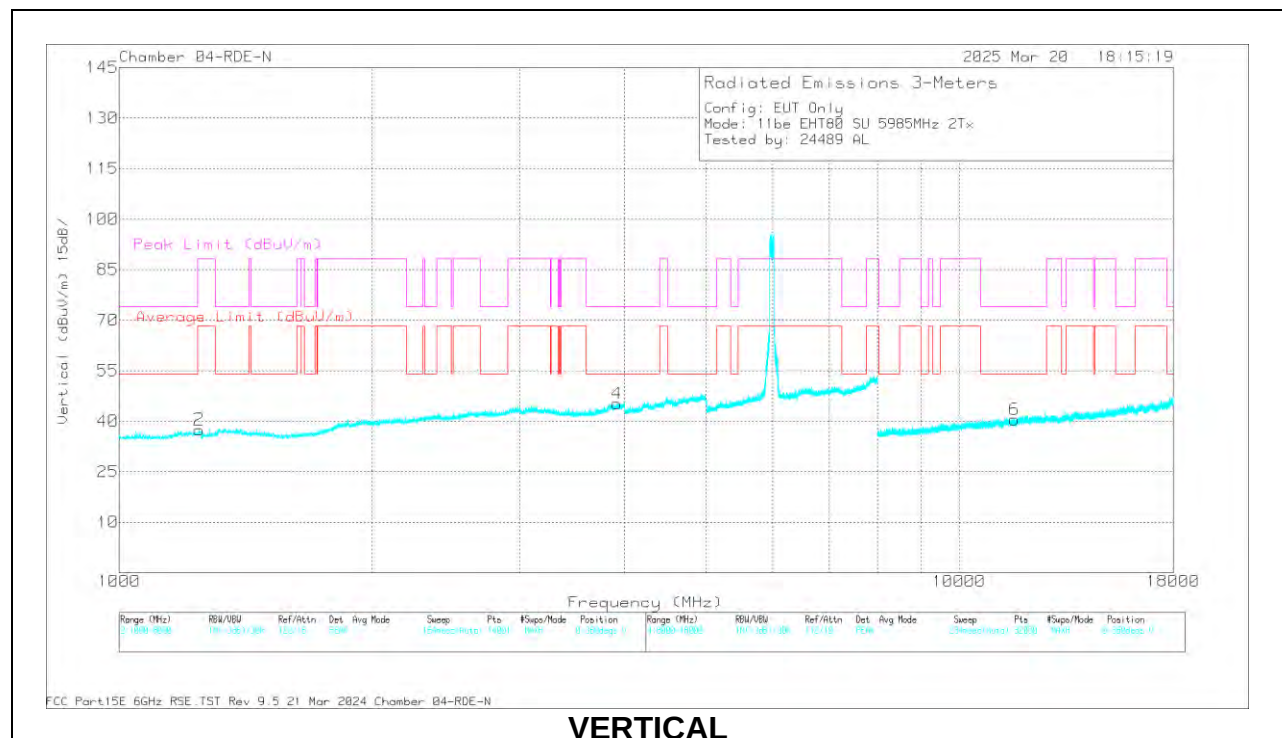
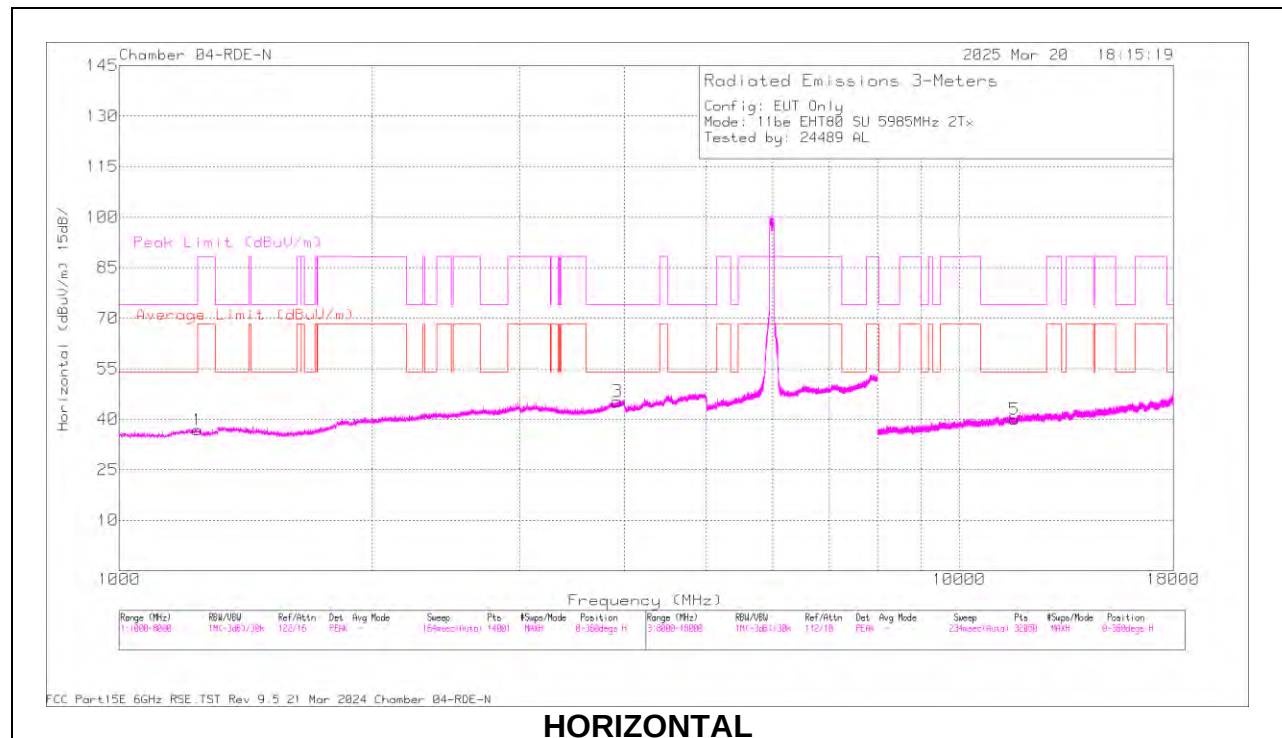
80MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Fr tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5985	6 + 5	* 1229.104	46.76	PK-U	28.9	0	-28.1	47.56	-	-	74	-26.44	0	100	H
			* 1257.647	34.01	ADR	29.1	0	-28.04	35.07	68.2	-33.13	-	-	0	100	H
			* 3935.619	45.58	PK-U	33.9	0	-25.75	53.73	-	-	74	-20.27	0	100	H
			* 3931.105	33.96	ADR	33.9	0	-25.65	42.21	54	-11.79	-	-	0	100	H
			* 1244.546	46	PK-U	29	0	-28.03	46.97	-	-	88.2	-41.23	0	201	V
			* 1263.059	34.06	ADR	29.2	0	-28.06	35.2	68.2	-33	-	-	0	201	V
			* 3906.238	45.68	PK-U	33.9	0	-25.71	53.87	-	-	74	-20.13	0	200	V
			* 3934.193	34	ADR	33.9	0	-25.72	42.18	54	-11.82	-	-	0	200	V
			* 11638.127	57.04	PK-U	38.5	0	-45.07	50.47	-	-	74	-23.53	0	100	H
			* 11662.673	45.39	ADR	38.5	0	-45.4	38.49	54	-15.51	-	-	0	100	H
			* 11660.457	57.33	PK-U	38.5	0	-45.36	50.47	-	-	74	-23.53	0	201	V
			* 11648.685	45.32	ADR	38.5	0	-45.26	38.56	54	-15.44	-	-	0	201	V
	6145	6 + 5	* 1365.84	45.65	PK-U	29	0	-27.9	46.75	-	-	74	-27.25	0	100	H
			* 1343.91	34.23	ADR	29.1	0	-28.02	35.31	54	-18.69	-	-	0	100	H
			* 3864.036	45.63	PK-U	33.8	0	-25.81	53.62	-	-	74	-20.38	0	100	H
			* 3863.253	34.25	ADR	33.8	0	-25.8	42.25	54	-11.75	-	-	0	100	H
			* 1357.524	46.33	PK-U	29	0	-28	47.33	-	-	74	-26.67	0	201	V
			* 1358.126	34.14	ADR	29	0	-28	35.14	54	-18.86	-	-	0	201	V
			* 3843.931	46.05	PK-U	33.8	0	-25.66	54.19	-	-	74	-19.81	0	200	V
			* 3860.836	34.13	ADR	33.8	0	-25.78	42.15	54	-11.85	-	-	0	200	V
			* 11398.549	57.02	PK-U	38.2	0	-45.04	50.18	-	-	74	-23.82	0	100	H
			* 11393.891	45.45	ADR	38.2	0	-45.19	38.46	54	-15.54	-	-	0	100	H
			* 11405.525	57.02	PK-U	38.2	0	-44.87	50.35	-	-	74	-23.65	0	201	V
			* 11391.634	45.43	ADR	38.2	0	-45.25	38.38	54	-15.62	-	-	0	201	V
	6385	6 + 5	* 1338.014	46.11	PK-U	29.2	0	-27.97	47.34	-	-	74	-26.66	0	100	H
			* 1321.787	34.39	ADR	29.2	0	-27.98	35.61	54	-18.39	-	-	0	100	H
			* 3942.49	45.98	PK-U	33.9	0	-25.75	54.13	-	-	74	-19.87	0	100	H
			* 3926.883	33.97	ADR	33.9	0	-25.63	42.24	54	-11.76	-	-	0	100	H
			* 1322.407	45.97	PK-U	29.2	0	-27.98	47.19	-	-	74	-26.81	0	201	V
			* 1323.938	34.32	ADR	29.2	0	-28.01	35.51	54	-18.49	-	-	0	201	V
			* 3934.05	45.66	PK-U	33.9	0	-25.71	53.85	-	-	74	-20.15	0	200	V
			* 3915.04	34.02	ADR	33.9	0	-25.61	42.31	54	-11.69	-	-	0	200	V
			* 11785.725	56.22	PK-U	38.6	0	-45.22	49.6	-	-	74	-24.4	0	100	H
			* 11785.036	44.92	ADR	38.6	0	-45.21	38.31	54	-15.69	-	-	0	100	H
			* 11783.576	56.66	PK-U	38.6	0	-45.24	50.02	-	-	74	-23.98	0	201	V
			* 11797.287	44.8	ADR	38.6	0	-45.06	38.34	54	-15.66	-	-	0	201	V
11be (106+26T Mode / Highest PSD)	5985	6 + 5	* 1.251439	63.06	PK-U	29.4	0	-50.72	41.74	-	-	88.2	-46.46	0	199	H
			* 1.251883	51.13	ADR	29.4	0	-50.7	29.83	68.2	-38.37	-	-	0	199	H
			* 3.681956	58.25	PK-U	33	0	-48.05	43.2	-	-	74	-30.8	0	101	H
			* 3.681135	46.67	ADR	33	0	-48.06	31.61	54	-22.39	-	-	0	101	H
			* 1.250627	63.31	PK-U	29.4	0	-50.72	41.99	-	-	88.2	-46.21	0	101	V
			* 1.250494	51.2	ADR	29.4	0	-50.71	29.89	68.2	-38.31	-	-	0	101	V
			* 3.683864	58.18	PK-U	33	0	-48	43.18	-	-	74	-30.82	0	200	V
			* 3.682891	46.6	ADR	33	0	-48.05	31.55	54	-22.45	-	-	0	200	V
			12.988154	56.22	PK-U	39.2	0	-44.57	50.85	-	-	88.2	-37.35	0	200	V
			12.988221	44.87	ADR	39.2	0	-44.57	39.5	68.2	-28.7	-	-	0	200	V
			12.990432	56.21	PK-U	39.2	0	-44.54	50.87	-	-	88.2	-37.33	0	200	H
			12.99184	44.53	ADR	39.2	0	-44.46	39.27	68.2	-28.93	-	-	0	200	H
	6145	6 + 5	1.258174	50.28	ADR	29.4	0	-50.7	28.98	68.2	-39.22	-	-	0	199	V
			1.258322	61.88	PK-U	29.4	0	-50.7	40.58	-	-	88.2	-47.62	0	199	V
			1.259015	49.89	ADR	29.4	0	-50.72	28.57	68.2	-39.63	-	-	0	199	H
			1.259485	61.55	PK-U	29.4	0	-50.72	40.23	-	-	88.2	-47.97	0	199	H
			3.072701	59.47	PK-U	33	0	-48.85	43.62	-	-	88.2	-44.58	0	199	V
			3.072876	47.77	ADR	33	0	-48.85	31.92	68.2	-36.28	-	-	0	101	H
			3.074031	47.96	ADR	33	0	-48.86	32.1	68.2	-36.1	-	-	0	199	V
			3.075206	59	PK-U	33	0	-48.83	43.17	-	-	88.2	-45.03	0	101	H
			10.093074	58.31	PK-U	37.1	0	-47	48.41	-	-	88.2	-39.79	0	200	V
			10.093245	47.04	ADR	37.1	0	-47	37.14	68.2	-31.06	-	-	0	101	H
			10.095299	58.76	PK-U	37.1	0	-47.19	48.67	-	-	88.2	-39.53	0	101	H
			10.09569	46.97	ADR	37.1	0	-47.21	36.86	68.2	-31.34	-	-	0	200	V
	6385	6 + 5	* 1.253139	62.85	PK-U	29.4	0	-50.71	41.54	-	-	88.2	-46.66	0	200	H
			* 1.253084	51.11	ADR	29.4	0	-50.71	29.8	68.2	-38.4	-	-	0	200	H
			* 3.532372	58.23	PK-U	33	0	-47.84	43.39	-	-	88.2	-44.81	0	200	H
			* 3.530839	46.48	ADR	33	0	-47.85	31.63	68.2	-36.57	-	-	0	200	H
			* 1.250772	62.85	PK-U	29.4	0	-50.72	41.53	-	-	88.2	-46.67	0	101	V
			* 1.249575	51.37	ADR	29.4	0	-50.69	30.08	68.2	-38.12	-	-	0	101	V
			* 3.532387	58.21	PK-U	33	0	-47.84	43.37	-	-	88.2	-44.83	0	101	V
			* 3.529582	46.68	ADR	33	0	-47.82	31.86	68.2	-36.34	-	-	0	101	V
			10.090235	46.96	ADR	37.1	0	-46.98	37.08	68.2	-31.12	-	-	0	200	H
			10.091944	58.9	PK-U	37.1	0	-46.99	49.01	-	-	88.2	-39.19	0	200	V
			10.092387	46.85	ADR	37.1	0	-46.99	36.96	68.2	-31.24	-	-	0	200	V
			10.093039	58.31	PK-U	37.1	0	-47	48.41	-	-	88.2	-39.79	0	200	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5985MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1229.104	46.76	PK-U	28.9	0	-28.1	47.56	-	-	74	-26.44	0	100	H
	* 1257.647	34.01	ADR	29.1	0	-28.04	35.07	68.2	-33.13	-	-	0	100	H
3	* 3935.619	45.58	PK-U	33.9	0	-25.75	53.73	-	-	74	-20.27	0	100	H
	* 3931.105	33.96	ADR	33.9	0	-25.65	42.21	54	-11.79	-	-	0	100	H
2	* 1244.546	46	PK-U	29	0	-28.03	46.97	-	-	88.2	-41.23	0	201	V
	* 1263.059	34.06	ADR	29.2	0	-28.06	35.2	68.2	-33	-	-	0	201	V
4	* 3906.238	45.68	PK-U	33.9	0	-25.71	53.87	-	-	74	-20.13	0	200	V
	* 3934.193	34	ADR	33.9	0	-25.72	42.18	54	-11.82	-	-	0	200	V
5	* 11638.127	57.04	PK-U	38.5	0	-45.07	50.47	-	-	74	-23.53	0	100	H
	* 11662.673	45.39	ADR	38.5	0	-45.4	38.49	54	-15.51	-	-	0	100	H
6	* 11660.457	57.33	PK-U	38.5	0	-45.36	50.47	-	-	74	-23.53	0	201	V
	* 11648.685	45.32	ADR	38.5	0	-45.26	38.56	54	-15.44	-	-	0	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

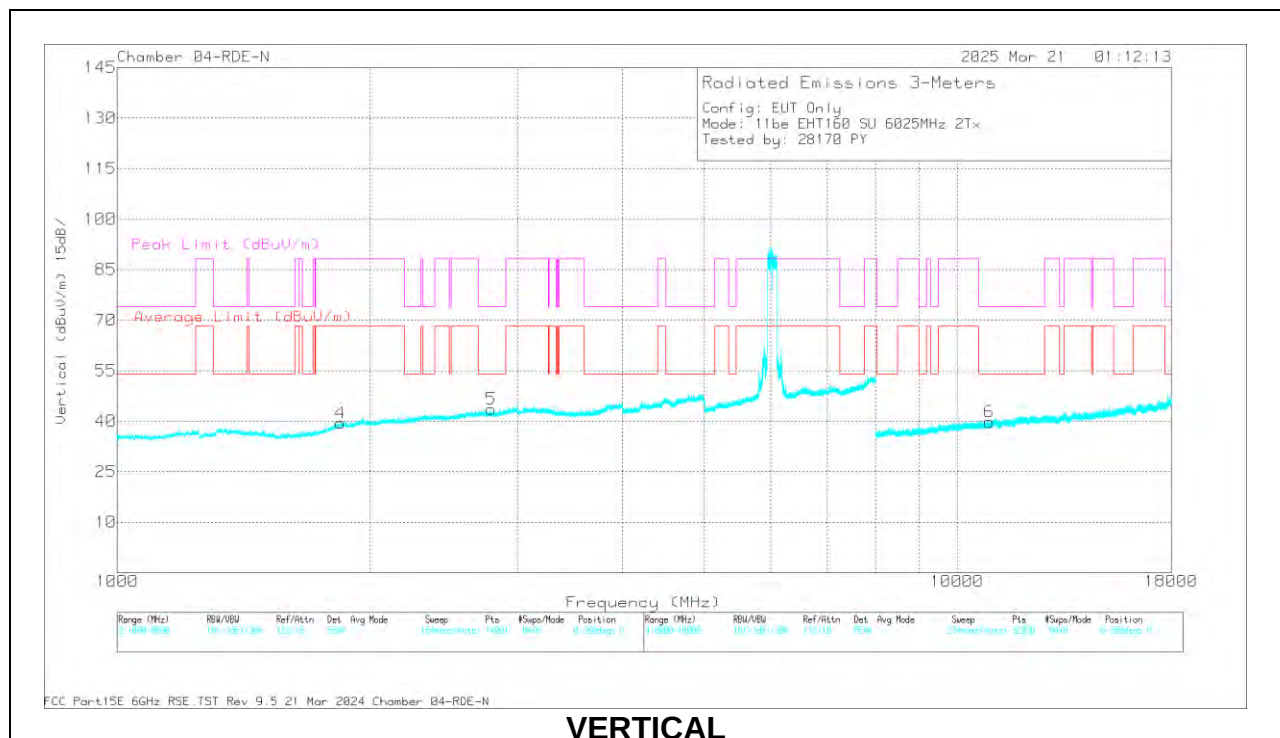
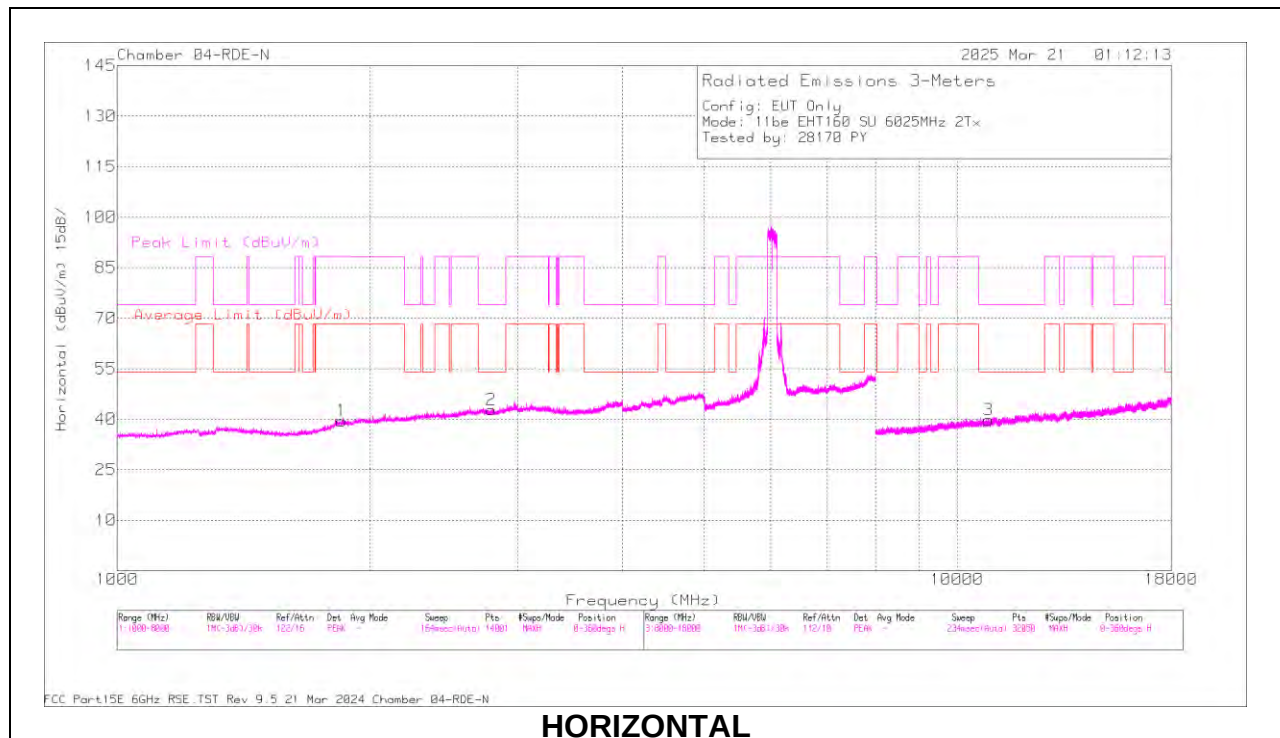
160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6025	6 + 5	* 2804.71	46.53	PK-U	32.4	0	-26.51	52.42	-	-	74	-21.58	0	100	H
			* 2776.801	34.46	ADR	32.4	0	-26.51	40.35	54	-13.65	-	-	0	100	H
			* 2784.989	46.34	PK-U	32.4	0	-26.48	52.26	-	-	74	-21.74	0	200	V
			* 2769.327	34.51	ADR	32.4	0	-26.56	40.35	54	-13.65	-	-	0	200	V
			* 10913.446	56.82	PK-U	37.8	0	-45.41	49.21	-	-	74	-24.79	0	100	H
			* 10899.623	45.73	ADR	37.8	0	-45.78	37.75	54	-16.25	-	-	0	100	H
			* 10935.435	57.6	PK-U	37.8	0	-45.6	49.8	-	-	74	-24.2	0	200	V
			* 10941.438	45.19	ADR	37.8	0	-45.72	37.27	54	-16.73	-	-	0	200	V
			1824.607	34.02	ADR	30.6	0	-27.6	37.02	68.2	-31.18	-	-	0	201	V
			1835.378	45.95	PK-U	30.7	0	-27.63	49.02	-	-	88.2	-39.18	0	201	V
			1833.073	33.96	ADR	30.7	0	-27.56	37.1	68.2	-31.1	-	-	0	100	H
			1860.959	45.6	PK-U	31	0	-27.44	49.16	-	-	88.2	-39.04	0	100	H
	6185	6 + 5	* 3504.397	33.88	ADR	33.1	0	-26.08	40.9	68.2	-27.3	-	-	0	100	H
			3499.158	45.51	PK-U	33	0	-26	52.51	-	-	88.2	-35.69	0	100	H
			* 3527.176	45.88	PK-U	33.2	0	-26.1	52.98	-	-	88.2	-35.22	0	200	V
			* 3502.332	33.95	ADR	33.1	0	-26.08	40.97	68.2	-27.23	-	-	0	200	V
			2106.19	34.14	ADR	31.5	0	-27.47	38.17	68.2	-30.03	-	-	0	201	V
			2110.158	45.78	PK-U	31.5	0	-27.42	49.86	-	-	88.2	-38.34	0	201	V
			2116.521	34.13	ADR	31.5	0	-27.36	38.27	68.2	-29.93	-	-	0	100	H
			2139.519	46	PK-U	31.5	0	-27.3	50.2	-	-	88.2	-38	0	100	H
			9985.554	45.34	ADR	37.3	0	-45.93	36.71	68.2	-31.49	-	-	0	201	V
			9989.415	57.23	PK-U	37.3	0	-45.83	48.7	-	-	88.2	-39.5	0	201	V
			10003.86	56.98	PK-U	37.3	0	-45.95	48.33	-	-	88.2	-39.87	0	100	H
			9984.134	45.43	ADR	37.3	0	-45.97	36.76	68.2	-31.44	-	-	0	100	H
	6345	6 + 5	* 3685.483	45.95	PK-U	33.3	0	-25.92	53.33	-	-	74	-20.67	0	100	H
			* 3701.821	34.14	ADR	33.3	0	-25.81	41.63	54	-12.37	-	-	0	100	H
			* 3674.729	45.95	PK-U	33.3	0	-26	53.25	-	-	74	-20.75	0	200	V
			* 3697.959	33.9	ADR	33.3	0	-25.86	41.34	54	-12.66	-	-	0	200	V
			* 10627.327	57.3	PK-U	37.6	0	-45.55	49.35	-	-	74	-24.65	0	201	V
			10592.786	45.63	ADR	37.6	0	-46.09	37.14	68.2	-31.06	-	-	0	201	V
			1737.101	45.72	PK-U	29.5	0	-27.68	47.54	-	-	88.2	-40.66	0	201	V
			1737.807	33.9	ADR	29.5	0	-27.67	35.73	68.2	-32.47	-	-	0	201	V
			1738.372	33.72	ADR	29.5	0	-27.66	35.56	68.2	-32.64	-	-	0	100	H
			1745.435	45.41	PK-U	29.6	0	-27.73	47.28	-	-	88.2	-40.92	0	100	H
			10576.968	45.74	ADR	37.6	0	-46.07	37.27	68.2	-30.93	-	-	0	100	H
			10599.865	57.66	PK-U	37.6	0	-46.06	49.2	-	-	88.2	-39	0	100	H
11be (52T Mode / Highest PSD)	6025	6 + 5	* 2.825683	57.13	PK-U	32.4	0	-46.77	42.76	-	-	74	-31.24	93	207	H
			* 2.827686	45.85	ADR	32.4	0	-46.83	31.42	54	-22.58	-	-	93	207	H
			* 4.265858	56.63	PK-U	33.7	0	-46.6	43.73	-	-	74	-30.27	5	323	H
			* 4.263824	44.76	ADR	33.7	0	-46.6	31.86	54	-22.14	-	-	5	323	H
			* 2.820988	57.26	PK-U	32.4	0	-46.9	42.76	-	-	74	-31.24	5	101	V
			* 2.821799	45.64	ADR	32.4	0	-46.82	31.22	54	-22.78	-	-	5	101	V
			* 4.266293	55.58	PK-U	33.7	0	-46.57	42.71	-	-	74	-31.29	5	200	V
			* 4.264357	44.6	ADR	33.7	0	-46.6	31.7	54	-22.3	-	-	5	200	V
			* 12.105712	52.88	PK-U	38.7	0	-41	50.58	-	-	74	-23.42	5	101	H
			* 12.105551	41.36	ADR	38.7	0	-41	39.06	54	-14.94	-	-	5	101	H
			* 12.106868	52.96	PK-U	38.7	0	-41	50.66	-	-	74	-23.34	5	200	V
			* 12.105689	41.5	ADR	38.7	0	-41	39.2	54	-14.8	-	-	5	200	V
	6185	6 + 5	* 1.614534	56.72	PK-U	28.5	0	-46.05	39.17	-	-	74	-34.83	251	382	H
			* 1.615704	44.93	ADR	28.5	0	-46.17	27.26	54	-26.74	-	-	251	382	H
			* 3.559595	55.33	PK-U	33.1	0	-45.2	43.23	-	-	88.2	-44.97	15	274	H
			* 3.559112	43.23	ADR	33.1	0	-45.2	31.13	68.2	-37.07	-	-	15	274	H
			* 1.61336	56.52	PK-U	28.4	0	-46	38.92	-	-	74	-35.08	138	298	V
			* 1.614414	45.06	ADR	28.4	0	-46.04	27.42	54	-26.58	-	-	138	298	V
			* 3.561814	54.96	PK-U	33.1	0	-45.1	42.96	-	-	88.2	-45.24	245	149	V
			* 3.561561	43.05	ADR	33.1	0	-45.1	31.05	68.2	-37.15	-	-	245	149	V
			* 12.130792	52.98	PK-U	38.7	0	-40.9	50.78	-	-	74	-23.22	245	101	H
			* 12.129889	41.16	ADR	38.7	0	-40.9	38.96	54	-15.04	-	-	245	101	H
			* 12.128861	52.97	PK-U	38.7	0	-40.9	50.77	-	-	74	-23.23	245	200	V
			* 12.129985	40.99	ADR	38.7	0	-40.9	38.79	54	-15.21	-	-	245	200	V
	6345	6 + 5	* 1.587663	56.43	PK-U	28.3	0	-46.23	38.5	-	-	74	-35.5	41	162	H
			* 1.586471	45.16	ADR	28.3	0	-46.3	27.16	54	-26.84	-	-	41	162	H
			3.203178	55.64	PK-U	33	0	-45.4	43.24	-	-	88.2	-44.96	174	162	H
			3.204686	43.91	ADR	33	0	-45.4	31.51	68.2	-36.69	-	-	174	162	H
			* 1.585307	58.09	PK-U	28.3	0	-46.3	40.09	-	-	74	-33.91	58	246	V
			* 1.583161	46.01	ADR	28.2	0	-46.3	27.91	54	-26.09	-	-	58	246	V
			3.207403	55.7	PK-U	33	0	-45.36	43.34	-	-	88.2	-44.86	79	322	V
			3.207243	44.07	ADR	33	0	-45.38	31.69	68.2	-36.51	-	-	79	322	V
			* 12.573175	52.8	PK-U	38.7	0	-41.02	50.48	-	-	74	-23.52	79	101	H
			* 12.571449	41.27	ADR	38.7	0	-41.16	38.81	54	-15.19	-	-	79	101	H
			* 12.572755	53.47	PK-U	38.7	0	-41.02	51.15	-	-	74	-22.85	79	101	V
			* 12.570767	41.4	ADR	38.7	0	-41.18	38.92	54	-15.08	-	-	79	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6025MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	4112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2804.71	46.53	PK-U	32.4	0	-26.51	52.42	-	-	74	-21.58	0	100	H
	* 2776.801	34.46	ADR	32.4	0	-26.51	40.35	54	-13.65	-	-	0	100	H
5	* 2784.989	46.34	PK-U	32.4	0	-26.48	52.26	-	-	74	-21.74	0	200	V
	* 2769.327	34.51	ADR	32.4	0	-26.56	40.35	54	-13.65	-	-	0	200	V
3	* 10913.446	56.82	PK-U	37.8	0	-45.41	49.21	-	-	74	-24.79	0	100	H
	* 10899.623	45.73	ADR	37.8	0	-45.78	37.75	54	-16.25	-	-	0	100	H
6	* 10935.435	57.6	PK-U	37.8	0	-45.6	49.8	-	-	74	-24.2	0	200	V
	* 10941.438	45.19	ADR	37.8	0	-45.72	37.27	54	-16.73	-	-	0	200	V
4	1824.607	34.02	ADR	30.6	0	-27.6	37.02	68.2	-31.18	-	-	0	201	V
	1835.378	45.95	PK-U	30.7	0	-27.63	49.02	-	-	88.2	-39.18	0	201	V
1	1833.073	33.96	ADR	30.7	0	-27.56	37.1	68.2	-31.1	-	-	0	100	H
	1860.959	45.6	PK-U	31	0	-27.44	49.16	-	-	88.2	-39.04	0	100	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS

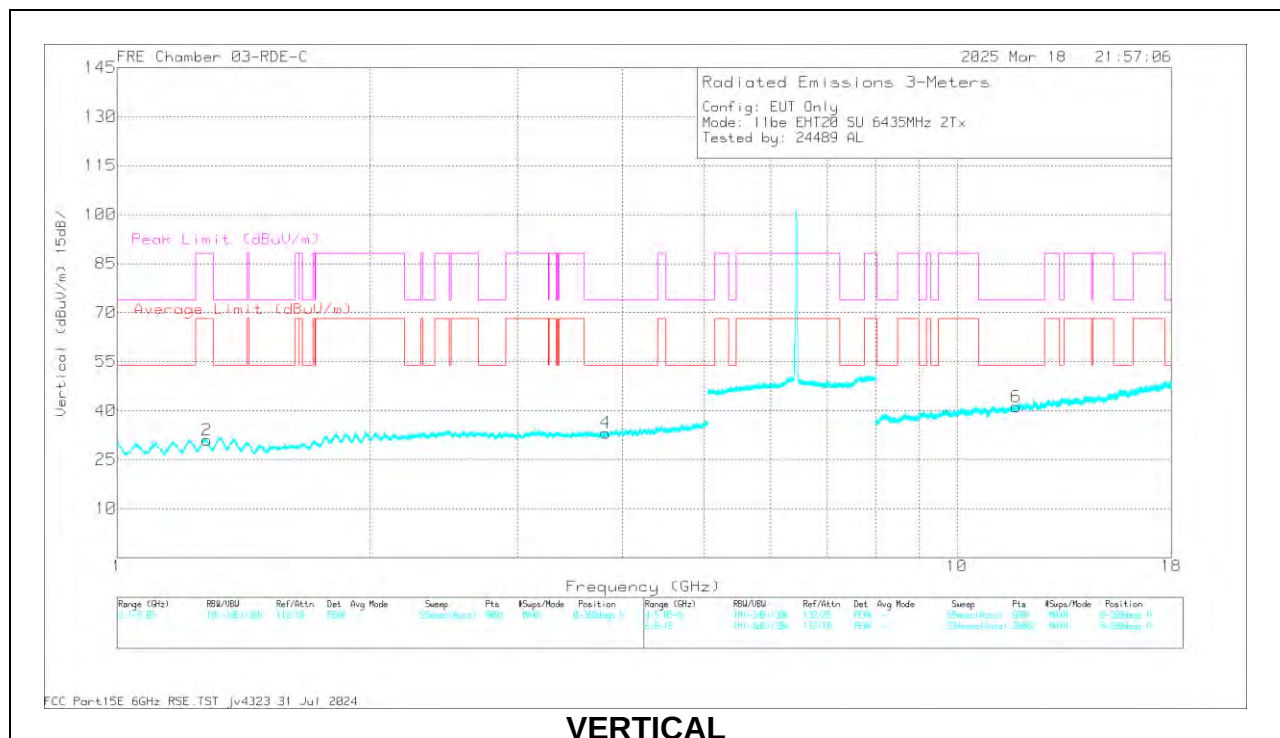
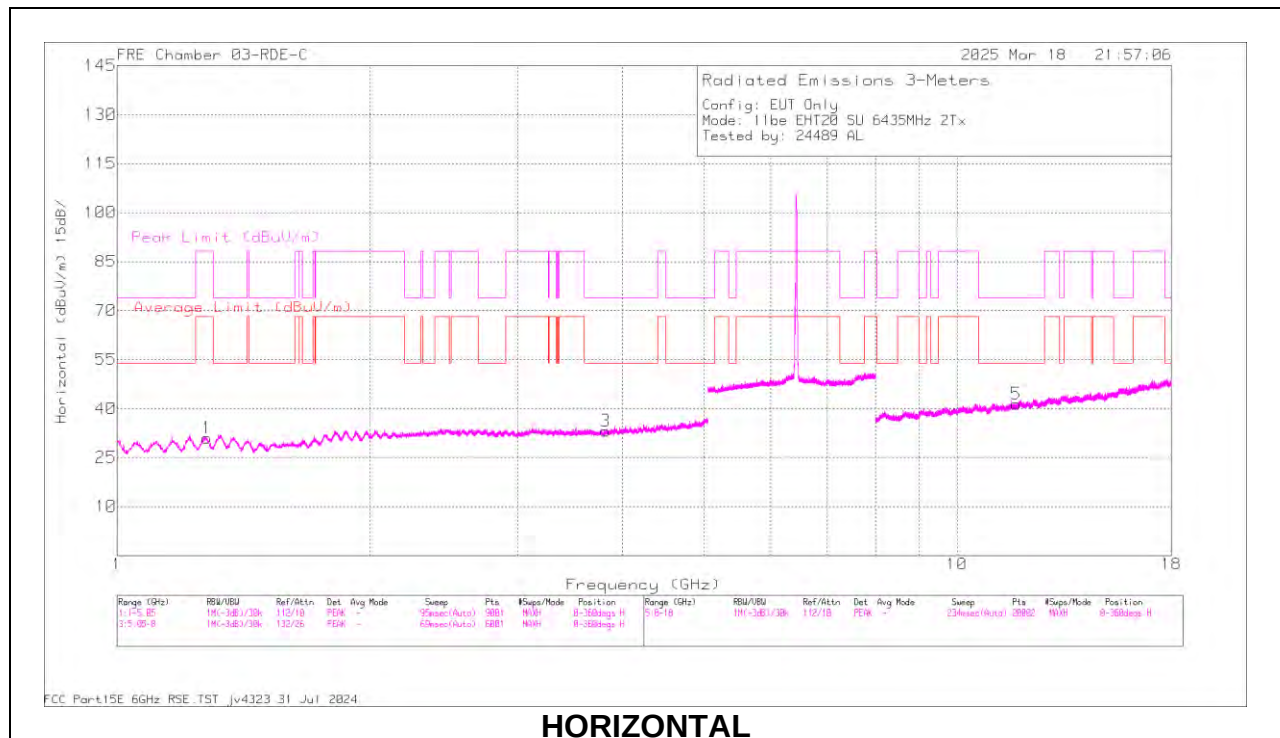
20MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/IR tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6435	6 + 5	* 1.276586	60.74	PK-U	29.4	0	-47.9	42.24	-	-	88.2	-45.96	1	199	H
			* 1.27659	48.33	ADR	29.4	0	-47.9	29.83	68.2	-38.37	-	-	1	199	H
			* 3.816105	55.99	PK-U	33	0	-45.81	43.18	-	-	74	-30.82	1	101	H
			* 3.814102	44.33	ADR	32.9	0	-45.8	31.43	54	-22.57	-	-	1	101	H
			* 1.2782	59.69	PK-U	29.4	0	-47.9	41.19	-	-	88.2	-47.01	1	101	V
			* 1.27926	48.21	ADR	29.4	0	-47.9	29.71	68.2	-38.49	-	-	1	101	V
			* 3.818041	56.25	PK-U	33	0	-45.8	43.45	-	-	74	-30.55	1	199	V
			* 3.817473	44.31	ADR	33	0	-45.85	31.46	54	-22.54	-	-	1	199	V
			* 11.764141	55.82	PK-U	38.6	0	-43.1	51.32	-	-	74	-22.68	1	199	H
			* 11.763673	44.1	ADR	38.6	0	-43.1	39.6	54	-14.4	-	-	1	199	H
			* 11.763935	55.92	PK-U	38.6	0	-43.1	51.42	-	-	74	-22.58	1	199	V
			* 11.763687	44.36	ADR	38.6	0	-43.1	39.86	54	-14.14	-	-	1	199	V
	6475	6 + 5	* 1.331793	60.15	PK-U	29.3	0	-47.72	41.73	-	-	74	-32.27	1	199	H
			* 1.330725	48.66	ADR	29.3	0	-47.8	30.16	54	-23.84	-	-	1	199	H
			* 3.983448	55.94	PK-U	33.4	0	-45.9	43.44	-	-	74	-30.56	1	101	H
			* 3.985256	44.71	ADR	33.4	0	-45.9	32.21	54	-21.79	-	-	1	101	H
			* 1.333392	60.31	PK-U	29.3	0	-47.76	41.85	-	-	74	-32.15	1	101	V
			* 1.333464	48.18	ADR	29.3	0	-47.75	29.73	54	-24.27	-	-	1	101	V
			* 3.985841	56.1	PK-U	33.4	0	-45.9	43.6	-	-	74	-30.4	1	199	V
			* 3.983416	44.79	ADR	33.4	0	-45.9	32.29	54	-21.71	-	-	1	199	V
			* 11.822751	55.19	PK-U	38.6	0	-42.8	50.99	-	-	74	-23.01	1	101	H
			* 11.822578	43.87	ADR	38.6	0	-42.8	39.67	54	-14.33	-	-	1	101	H
			* 11.823902	55.58	PK-U	38.7	0	-42.71	51.57	-	-	74	-22.43	1	199	V
			* 11.823314	43.79	ADR	38.6	0	-42.77	39.62	54	-14.38	-	-	1	199	V
	6515	6 + 5	* 1.275724	60.09	PK-U	29.4	0	-47.9	41.59	-	-	88.2	-46.61	360	101	H
			* 1.274822	48.55	ADR	29.4	0	-47.88	30.07	68.2	-38.13	-	-	360	101	H
			* 3.959213	55.93	PK-U	33.4	0	-45.8	43.53	-	-	74	-30.47	360	101	H
			* 3.958759	43.84	ADR	33.4	0	-45.8	31.44	54	-22.56	-	-	360	101	H
			* 1.27955	60.11	PK-U	29.4	0	-47.9	41.61	-	-	88.2	-46.59	360	101	V
			* 1.276107	48.42	ADR	29.4	0	-47.9	29.92	68.2	-38.28	-	-	360	101	V
			* 3.95529	55.55	PK-U	33.4	0	-45.8	43.15	-	-	74	-30.85	360	199	V
			* 3.955742	44.07	ADR	33.4	0	-45.8	31.67	54	-22.33	-	-	360	199	V
			* 11.42393	55.38	PK-U	38.2	0	-43.71	49.87	-	-	74	-24.13	360	101	H
			* 11.423043	44.13	ADR	38.2	0	-43.8	38.53	54	-15.47	-	-	360	101	H
			* 11.424427	55.99	PK-U	38.2	0	-43.74	50.45	-	-	74	-23.55	360	199	V
			* 11.424095	44.07	ADR	38.2	0	-43.71	38.56	54	-15.44	-	-	360	199	V
11be (106+26T Mode/ Highest PSD)	6435	6 + 5	* 9.042852	54.17	PK-U	35.9	0	-42.6	47.47	-	-	74	-26.53	0	101	H
			* 9.042189	42.47	ADR	35.9	0	-42.6	35.77	54	-18.23	-	-	0	101	H
			12.8569	52.17	PK-U	38.9	0	-40.6	50.47	-	-	88.2	-37.73	0	101	H
			12.853866	40.91	ADR	38.9	0	-40.7	39.11	68.2	-29.09	-	-	0	101	H
			* 17.969738	55.8	PK-U	41.2	0	-40.6	56.4	-	-	74	-17.6	0	101	H
			* 17.971114	44.05	ADR	41.2	0	-40.69	44.56	54	-9.44	-	-	0	101	H
			* 9.042973	53.93	PK-U	35.9	0	-42.6	47.23	-	-	74	-26.77	0	101	V
			* 9.04252	42.3	ADR	35.9	0	-42.6	35.6	54	-18.4	-	-	0	101	V
			12.859039	52.06	PK-U	38.9	0	-40.4	50.56	-	-	88.2	-37.64	0	200	V
			12.857051	40.77	ADR	38.9	0	-40.59	39.08	68.2	-29.12	-	-	0	200	V
			* 17.969235	55.9	PK-U	41.2	0	-40.6	56.5	-	-	74	-17.5	0	101	V
			* 17.970099	44.06	ADR	41.2	0	-40.61	44.65	54	-9.35	-	-	0	101	V
	6475	6 + 5	* 9.025999	53.78	PK-U	35.9	0	-42.5	47.18	-	-	74	-26.82	2	101	H
			* 9.028207	42.15	ADR	35.9	0	-42.5	35.55	54	-18.45	-	-	2	101	H
			12.947507	52.57	PK-U	38.8	0	-41.1	50.27	-	-	88.2	-37.93	2	200	H
			12.947708	41.25	ADR	38.8	0	-41.1	38.95	68.2	-29.25	-	-	2	200	H
			* 17.939479	55.44	PK-U	41.2	0	-40.9	55.74	-	-	74	-18.26	2	101	H
			* 17.939413	44.07	ADR	41.2	0	-40.9	44.37	54	-9.63	-	-	2	101	H
			* 9.029921	54.4	PK-U	35.9	0	-42.5	47.8	-	-	74	-26.2	2	101	V
			* 9.029252	42.11	ADR	35.9	0	-42.5	35.51	54	-18.49	-	-	2	101	V
			12.944413	52.68	PK-U	38.8	0	-41.2	50.28	-	-	88.2	-37.92	2	200	V
			12.944316	41.4	ADR	38.8	0	-41.2	39	68.2	-29.2	-	-	2	200	V
			* 17.934573	55.12	PK-U	41.2	0	-40.8	55.52	-	-	74	-18.48	2	101	V
			* 17.93298	43.85	ADR	41.2	0	-40.8	44.25	54	-9.75	-	-	2	101	V
	6515	6 + 5	* 9.011977	53.23	PK-U	35.9	0	-42.3	46.83	-	-	74	-27.17	0	200	H
			* 9.011568	41.61	ADR	35.9	0	-42.3	35.21	54	-18.79	-	-	0	200	H
			13.035294	53.67	PK-U	38.8	0	-41.3	51.17	-	-	88.2	-37.03	0	200	H
			13.034003	41.81	ADR	38.8	0	-41.3	39.31	68.2	-28.89	-	-	0	200	H
			* 17.996212	55.07	PK-U	41.1	0	-40.2	55.97	-	-	74	-18.03	0	200	H
			* 17.997457	43.73	ADR	41.1	0	-40.2	44.63	54	-9.37	-	-	0	200	H
			* 9.011569	53.71	PK-U	35.9	0	-42.3	47.31	-	-	74	-26.69	0	200	V
			* 9.012446	41.9	ADR	35.9	0	-42.3	35.5	54	-18.5	-	-	0	200	V
			13.035337	53.16	PK-U	38.8	0	-41.3	50.66	-	-	88.2	-37.54	0	101	V
			13.031997	42.03	ADR	38.8	0	-41.3	39.53	68.2	-28.67	-	-	0	101	V
			* 17.999827	55.17	PK-U	41.1	0	-40.2	56.07	-	-	74	-17.93	0	200	V
			* 17.998119	43.94	ADR	41.1	0	-40.2	44.84	54	-9.16	-	-	0	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6435MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.276586	60.74	PK-U	29.4	0	-47.9	42.24	-	-	88.2	-45.96	1	199	H
	* 1.27659	48.33	ADR	29.4	0	-47.9	29.83	68.2	-38.37	-	-	1	199	H
3	* 3.816105	55.99	PK-U	33	0	-45.81	43.18	-	-	74	-30.82	1	101	H
	* 3.814102	44.33	ADR	32.9	0	-45.8	31.43	54	-22.57	-	-	1	101	H
2	* 1.2782	59.69	PK-U	29.4	0	-47.9	41.19	-	-	88.2	-47.01	1	101	V
	* 1.27926	48.21	ADR	29.4	0	-47.9	29.71	68.2	-38.49	-	-	1	101	V
4	* 3.818041	56.25	PK-U	33	0	-45.8	43.45	-	-	74	-30.55	1	199	V
	* 3.817473	44.31	ADR	33	0	-45.85	31.46	54	-22.54	-	-	1	199	V
5	* 11.764141	55.82	PK-U	38.6	0	-43.1	51.32	-	-	74	-22.68	1	199	H
	* 11.763673	44.1	ADR	38.6	0	-43.1	39.6	54	-14.4	-	-	1	199	H
6	* 11.763935	55.92	PK-U	38.6	0	-43.1	51.42	-	-	74	-22.58	1	199	V
	* 11.763687	44.36	ADR	38.6	0	-43.1	39.86	54	-14.14	-	-	1	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

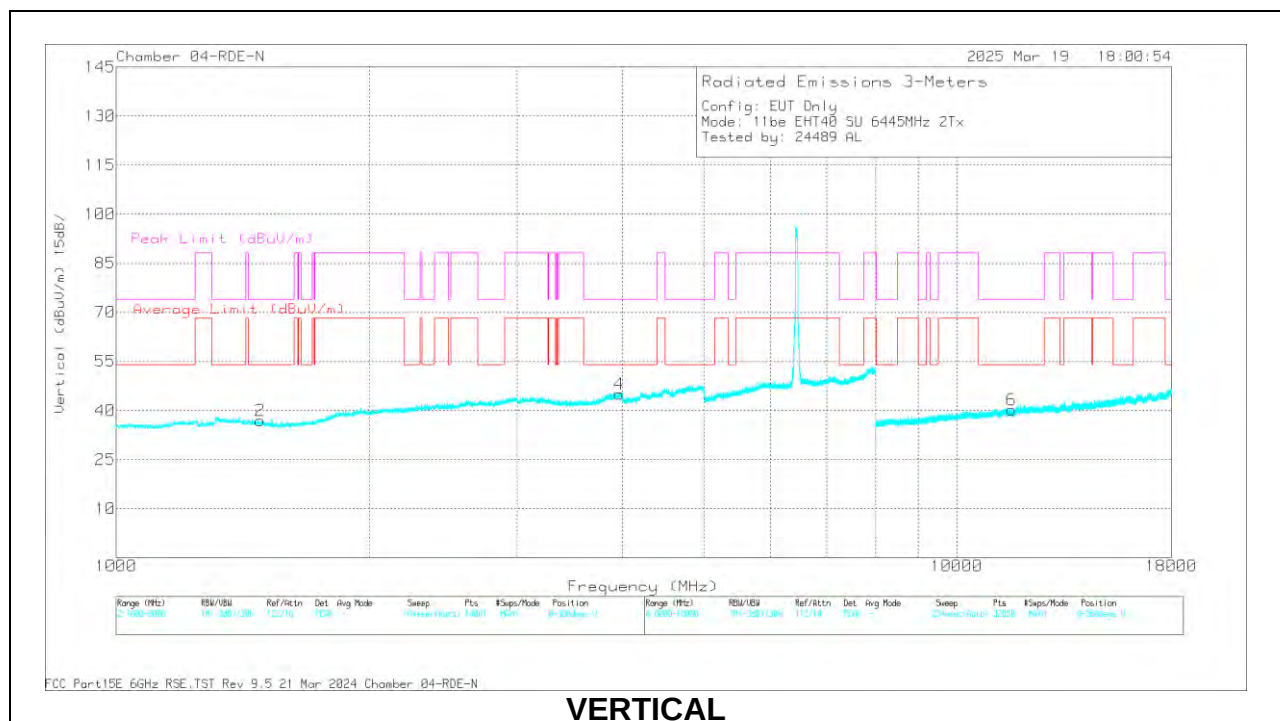
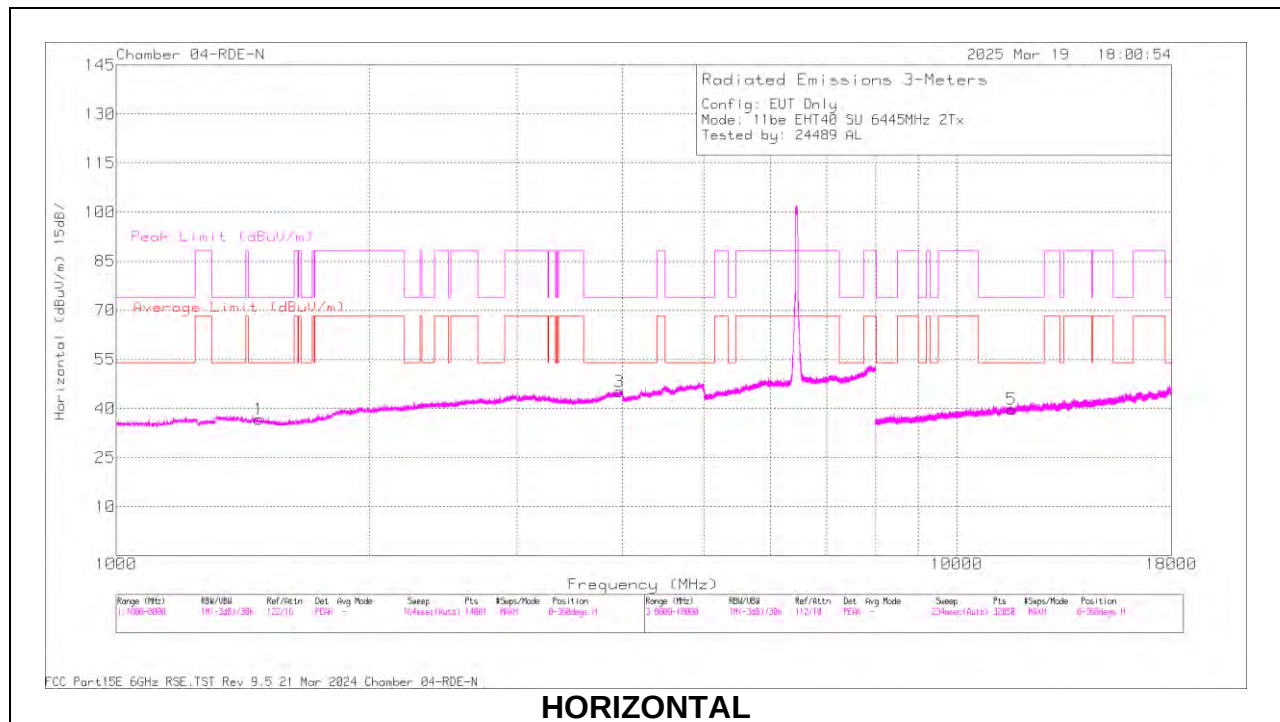
40MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6445	6 + 5	* 1469.715	46.2	PK-U	28.3	0	-27.76	46.74	-	-	74	-27.26	360	100	H
			* 1473.903	34.32	ADR	28.3	0	-27.81	34.81	54	-19.19	-	-	360	100	H
			* 3984.079	45.83	PK-U	33.9	0	-25.65	54.08	-	-	74	-19.92	360	100	H
			* 3984.342	34.47	ADR	33.9	0	-25.64	42.73	54	-11.27	-	-	360	100	H
			* 1500.907	45.95	PK-U	28.2	0	-27.86	46.29	-	-	74	-27.71	360	201	V
			* 1471.867	34.27	ADR	28.3	0	-27.76	34.81	54	-19.19	-	-	360	201	V
			* 3983.507	46.55	PK-U	33.9	0	-25.65	54.8	-	-	74	-19.2	360	200	V
			* 3980.828	34.44	ADR	33.9	0	-25.67	42.67	54	-11.33	-	-	360	200	V
			* 11618.319	56.31	PK-U	38.5	0	-45.15	49.66	-	-	74	-24.34	360	100	H
			* 11602.027	45.08	ADR	38.4	0	-45.39	38.09	54	-15.91	-	-	360	100	H
			* 11621.008	56.93	PK-U	38.5	0	-45.14	50.29	-	-	74	-23.71	360	201	V
			* 11635.056	45.08	ADR	38.5	0	-45.1	38.48	54	-15.52	-	-	360	201	V
	6485	6 + 5	* 1257.039	46.18	PK-U	29.1	0	-28.06	47.22	-	-	88.2	-40.98	360	100	H
			* 1224.724	34.16	ADR	28.9	0	-28.16	34.9	54	-19.1	-	-	360	100	H
			* 3920.857	45.98	PK-U	33.9	0	-25.66	54.22	-	-	74	-19.78	360	100	H
			* 3939.062	34.04	ADR	33.9	0	-25.76	42.18	54	-11.82	-	-	360	100	H
			* 1247.216	46.01	PK-U	29	0	-28.03	46.98	-	-	88.2	-41.22	360	201	V
			* 1223.741	34.07	ADR	28.8	0	-28.19	34.68	54	-19.32	-	-	360	201	V
			* 3912.641	45.82	PK-U	33.9	0	-25.62	54.1	-	-	74	-19.9	360	200	V
			* 3935.708	34.06	ADR	33.9	0	-25.75	42.21	54	-11.79	-	-	360	200	V
			* 11485.039	57.29	PK-U	38.3	0	-44.78	50.81	-	-	74	-23.19	360	100	H
			* 11485.495	44.82	ADR	38.3	0	-44.78	38.34	54	-15.66	-	-	360	100	H
			* 11481.149	56.97	PK-U	38.3	0	-44.71	50.56	-	-	74	-23.44	360	201	V
			* 11484.292	44.72	ADR	38.3	0	-44.77	38.25	54	-15.75	-	-	360	201	V
	6525 (Straddle)	6 + 5	* 1254.868	46	PK-U	29.1	0	-28.09	47.01	-	-	88.2	-41.19	360	100	H
			* 1231.67	34.04	ADR	28.9	0	-28.1	34.84	54	-19.16	-	-	360	100	H
			* 3949.859	45.72	PK-U	33.9	0	-25.85	53.77	-	-	74	-20.23	360	100	H
			* 3958.413	34.25	ADR	33.9	0	-25.8	42.35	54	-11.65	-	-	360	100	H
			* 1247.563	45.83	PK-U	29	0	-28.04	46.79	-	-	88.2	-41.41	360	201	V
			* 1226.598	34.11	ADR	28.9	0	-28.15	34.86	54	-19.14	-	-	360	201	V
			* 3948.802	46.09	PK-U	33.9	0	-25.84	54.15	-	-	74	-19.85	360	200	V
			* 3937.434	34.05	ADR	33.9	0	-25.77	42.18	54	-11.82	-	-	360	200	V
			* 11670.559	57.08	PK-U	38.5	0	-45.33	50.25	-	-	74	-23.75	360	100	H
			* 11668.797	45.28	ADR	38.5	0	-45.32	38.46	54	-15.54	-	-	360	100	H
			* 11672.309	57.22	PK-U	38.5	0	-45.33	50.39	-	-	74	-23.61	360	201	V
			* 11655.363	45.18	ADR	38.5	0	-45.35	38.33	54	-15.67	-	-	360	201	V
11be (106+26T Mode / Highest PSD)	6445	6 + 5	* 9.029161	53.53	PK-U	35.9	0	-42.5	46.93	-	-	74	-27.07	360	101	H
			* 9.025996	42.41	ADR	35.9	0	-42.5	35.81	54	-18.19	-	-	360	101	H
			12.902489	52.91	PK-U	38.9	0	-40.6	51.21	-	-	88.2	-36.99	360	101	H
			12.90141	41.01	ADR	38.9	0	-40.6	39.31	68.2	-28.89	-	-	360	101	H
			* 17.935864	56.35	PK-U	41.2	0	-40.8	56.75	-	-	74	-17.25	360	200	H
			* 17.937615	44.09	ADR	41.2	0	-40.86	44.43	54	-9.57	-	-	360	200	H
			* 9.029489	53.47	PK-U	35.9	0	-42.5	46.87	-	-	74	-27.13	360	200	V
			* 9.027474	41.94	ADR	35.9	0	-42.5	35.34	54	-18.66	-	-	360	200	V
			12.902398	52.91	PK-U	38.9	0	-40.6	51.21	-	-	88.2	-36.99	360	101	V
			12.903919	40.88	ADR	38.9	0	-40.6	39.18	68.2	-29.02	-	-	360	101	V
			* 17.939343	55.61	PK-U	41.2	0	-40.9	55.91	-	-	74	-18.09	360	101	V
			* 17.938915	43.83	ADR	41.2	0	-40.9	44.13	54	-9.87	-	-	360	101	V
	6485	6 + 5	* 1.249119	62.32	PK-U	29.4	0	-50.68	41.04	-	-	88.2	-47.16	360	101	H
			* 1.249814	50.95	ADR	29.4	0	-50.69	29.66	68.2	-38.54	-	-	360	101	H
			* 4.001441	58.14	PK-U	33.6	0	-47.85	43.89	-	-	74	-30.11	360	101	H
			* 4.000621	46.07	ADR	33.6	0	-47.83	31.84	54	-22.16	-	-	360	101	H
			* 1.251667	63.02	PK-U	29.4	0	-50.71	41.71	-	-	88.2	-46.49	360	101	V
			* 1.248992	51.23	ADR	29.4	0	-50.68	29.95	68.2	-38.25	-	-	360	101	V
			* 4.000219	57.48	PK-U	33.6	0	-47.82	43.26	-	-	74	-30.74	360	200	V
			* 4.001564	46.09	ADR	33.6	0	-47.85	31.84	54	-22.16	-	-	360	200	V
			* 11.72065	56.23	PK-U	38.5	0	-44.44	50.29	-	-	74	-23.71	360	200	H
			* 11.721705	44.72	ADR	38.5	0	-44.52	38.7	54	-15.3	-	-	360	200	H
			* 11.722184	57.07	PK-U	38.5	0	-44.52	51.05	-	-	74	-22.95	360	101	V
			* 11.722459	44.73	ADR	38.5	0	-44.5	38.73	54	-15.27	-	-	360	101	V
	6525	6 + 5	* 1.350254	61.77	PK-U	29	0	-50.29	40.48	-	-	74	-33.52	360	200	H
			* 1.352394	50.1	ADR	29	0	-50.34	28.76	54	-25.24	-	-	360	200	H
			* 3.946059	57.86	PK-U	33.5	0	-47.67	43.69	-	-	74	-30.31	360	101	H
			* 3.945369	45.63	ADR	33.5	0	-47.68	31.45	54	-22.55	-	-	360	101	H
			* 1.352664	62.03	PK-U	29	0	-50.34	40.69	-	-	74	-33.31	360	101	V
			* 1.354648	50.66	ADR	29	0	-50.36	29.3	54	-24.7	-	-	360	101	V
			* 3.946425	56.98	PK-U	33.5	0	-47.67	42.81	-	-	74	-31.19	360	101	V
			* 3.945097	45.59	ADR	33.5	0	-47.68	31.41	54	-22.59	-	-	360	101	V
			* 11.739614	56.83	PK-U	38.5	0	-44.52	50.81	-	-	74	-23.19	360	101	H
			* 11.738719	45.29	ADR	38.5	0	-44.51	39.28	54	-14.72	-	-	360	101	H
			* 11.738649	56.58	PK-U	38.5	0	-44.51	50.57	-	-	74	-23.43	360	101	V
			* 11.739289	45.36	ADR	38.5	0	-44.51	39.35	54	-14.65	-	-	360	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6445MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1469.715	46.2	PK-U	28.3	0	-27.76	46.74	-	-	74	-27.26	360	100	H
	* 1473.903	34.32	ADR	28.3	0	-27.81	34.81	54	-19.19	-	-	360	100	H
3	* 3984.079	45.83	PK-U	33.9	0	-25.65	54.08	-	-	74	-19.92	360	100	H
	* 3984.342	34.47	ADR	33.9	0	-25.64	42.73	54	-11.27	-	-	360	100	H
2	* 1500.907	45.95	PK-U	28.2	0	-27.86	46.29	-	-	74	-27.71	360	201	V
	* 1471.867	34.27	ADR	28.3	0	-27.76	34.81	54	-19.19	-	-	360	201	V
4	* 3983.507	46.55	PK-U	33.9	0	-25.65	54.8	-	-	74	-19.2	360	200	V
	* 3980.828	34.44	ADR	33.9	0	-25.67	42.67	54	-11.33	-	-	360	200	V
5	* 11618.319	56.31	PK-U	38.5	0	-45.15	49.66	-	-	74	-24.34	360	100	H
	* 11602.027	45.08	ADR	38.4	0	-45.39	38.09	54	-15.91	-	-	360	100	H
6	* 11621.008	56.93	PK-U	38.5	0	-45.14	50.29	-	-	74	-23.71	360	201	V
	* 11635.056	45.08	ADR	38.5	0	-45.1	38.48	54	-15.52	-	-	360	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

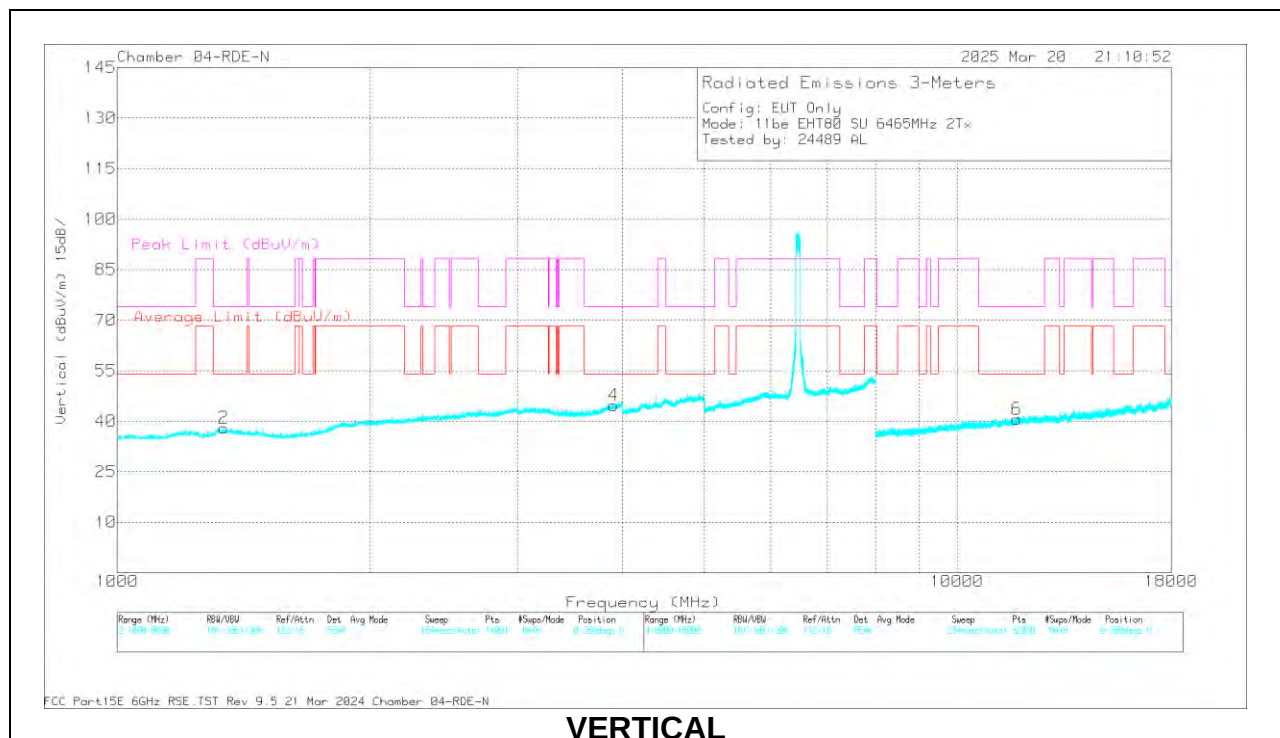
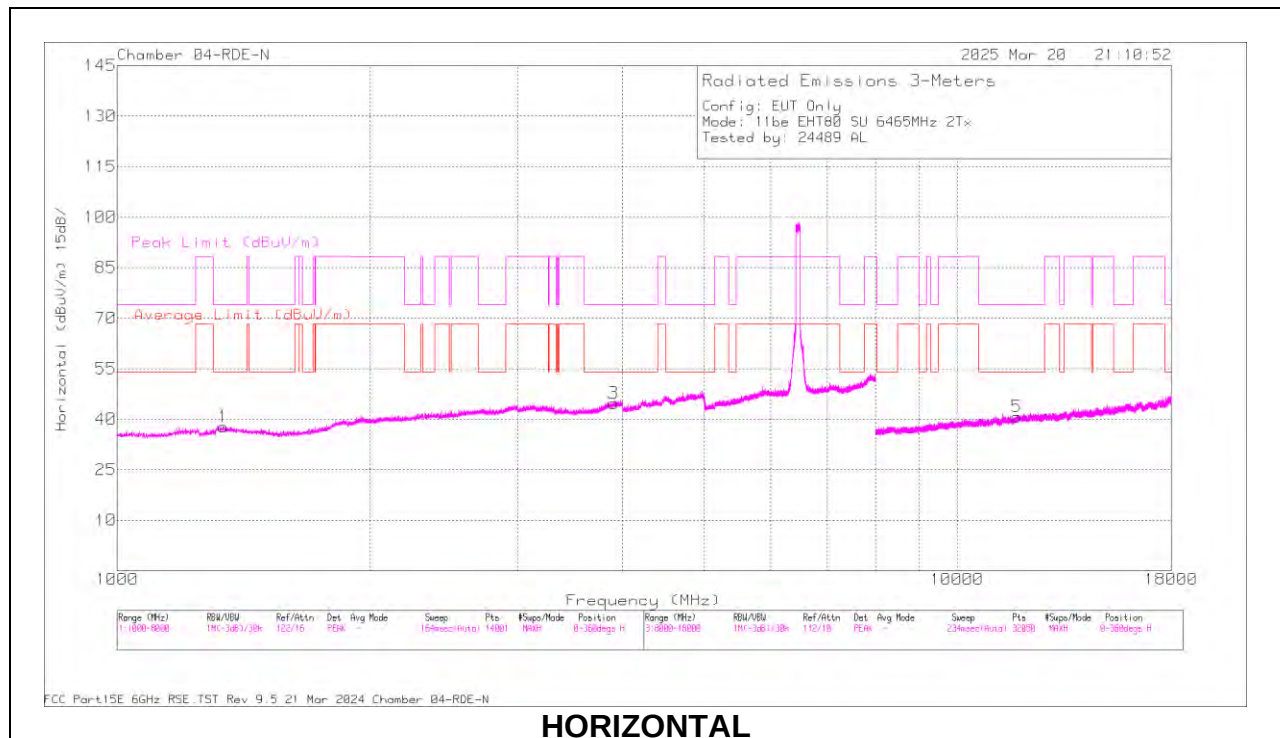
80MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6465	6 + 5	* 1324.69	46.43	PK-U	29.2	0	-28	47.63	-	-	74	-26.37	0	100	H
			* 1324.652	34.4	ADR	29.2	0	-28	35.6	54	-18.4	-	-	0	100	H
			* 3903.385	45.92	PK-U	33.9	0	-25.7	54.12	-	-	74	-19.88	0	100	H
			* 3915.073	33.87	ADR	33.9	0	-25.61	42.16	54	-11.84	-	-	0	100	H
			* 1351.511	45.87	PK-U	29.1	0	-27.95	47.02	-	-	74	-26.98	0	201	V
			* 1332.635	34.36	ADR	29.2	0	-27.98	35.58	54	-18.42	-	-	0	201	V
			* 3899.683	45.86	PK-U	33.9	0	-25.73	54.03	-	-	74	-19.97	0	200	V
			* 3916.916	33.84	ADR	33.9	0	-25.6	42.14	54	-11.86	-	-	0	200	V
			* 11769.448	56.4	PK-U	38.6	0	-45.13	49.87	-	-	74	-24.13	0	100	H
			* 11796.616	44.97	ADR	38.6	0	-45.08	38.49	54	-15.51	-	-	0	100	H
			* 11797.193	57.31	PK-U	38.6	0	-45.06	50.85	-	-	74	-23.15	0	201	V
			* 11796.556	44.74	ADR	38.6	0	-45.08	38.26	54	-15.74	-	-	0	201	V
11be (52+26T Mode / Highest PSD)	6465	6 + 5	* 1.646378	56.35	PK-U	28.7	0	-46.3	38.75	-	-	74	-35.25	299	344	H
			* 1.646388	44.73	ADR	28.7	0.12	-46.3	27.25	54	-26.75	-	-	299	344	H
			3.202126	55.19	PK-U	33	0	-45.4	42.79	-	-	88.2	-45.41	201	104	H
			3.200934	43.76	ADR	33	0.12	-45.4	31.48	68.2	-36.72	-	-	201	104	H
			1.643612	56.27	PK-U	28.7	0	-46.4	38.57	-	-	88.2	-49.63	233	114	V
			1.643878	44.77	ADR	28.7	0.12	-46.4	27.19	68.2	-41.01	-	-	233	114	V
			3.204504	55.31	PK-U	33	0	-45.4	42.91	-	-	88.2	-45.29	80	211	V
			3.203976	43.75	ADR	33	0.12	-45.4	31.47	68.2	-36.73	-	-	80	211	V
			* 12.105856	53.98	PK-U	38.7	0	-41	51.68	-	-	74	-22.32	80	200	H
			* 12.106016	41.11	ADR	38.7	0.12	-41	38.93	54	-15.07	-	-	80	200	H
			* 12.104028	52.77	PK-U	38.7	0	-41	50.47	-	-	74	-23.53	80	101	V
			* 12.102989	41.48	ADR	38.7	0.12	-41.1	39.2	54	-14.8	-	-	80	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6465MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1324.69	46.43	PK-U	29.2	0	-28	47.63	-	-	74	-26.37	0	100	H
	* 1324.652	34.4	ADR	29.2	0	-28	35.6	54	-18.4	-	-	0	100	H
3	* 3903.385	45.92	PK-U	33.9	0	-25.7	54.12	-	-	74	-19.88	0	100	H
	* 3915.073	33.87	ADR	33.9	0	-25.61	42.16	54	-11.84	-	-	0	100	H
2	* 1351.511	45.87	PK-U	29.1	0	-27.95	47.02	-	-	74	-26.98	0	201	V
	* 1332.635	34.36	ADR	29.2	0	-27.98	35.58	54	-18.42	-	-	0	201	V
4	* 3899.683	45.86	PK-U	33.9	0	-25.73	54.03	-	-	74	-19.97	0	200	V
	* 3916.916	33.84	ADR	33.9	0	-25.6	42.14	54	-11.86	-	-	0	200	V
5	* 11769.448	56.4	PK-U	38.6	0	-45.13	49.87	-	-	74	-24.13	0	100	H
	* 11796.616	44.97	ADR	38.6	0	-45.08	38.49	54	-15.51	-	-	0	100	H
6	* 11797.193	57.31	PK-U	38.6	0	-45.06	50.85	-	-	74	-23.15	0	201	V
	* 11796.556	44.74	ADR	38.6	0	-45.08	38.26	54	-15.74	-	-	0	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

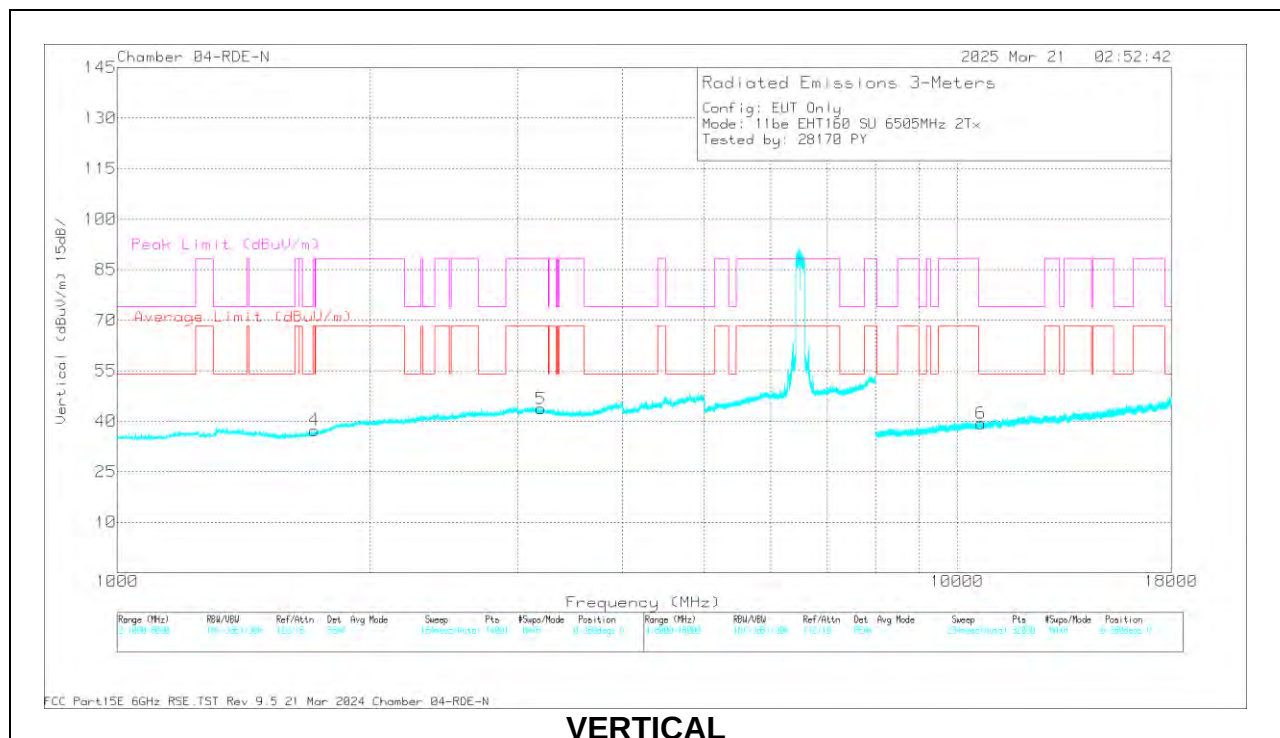
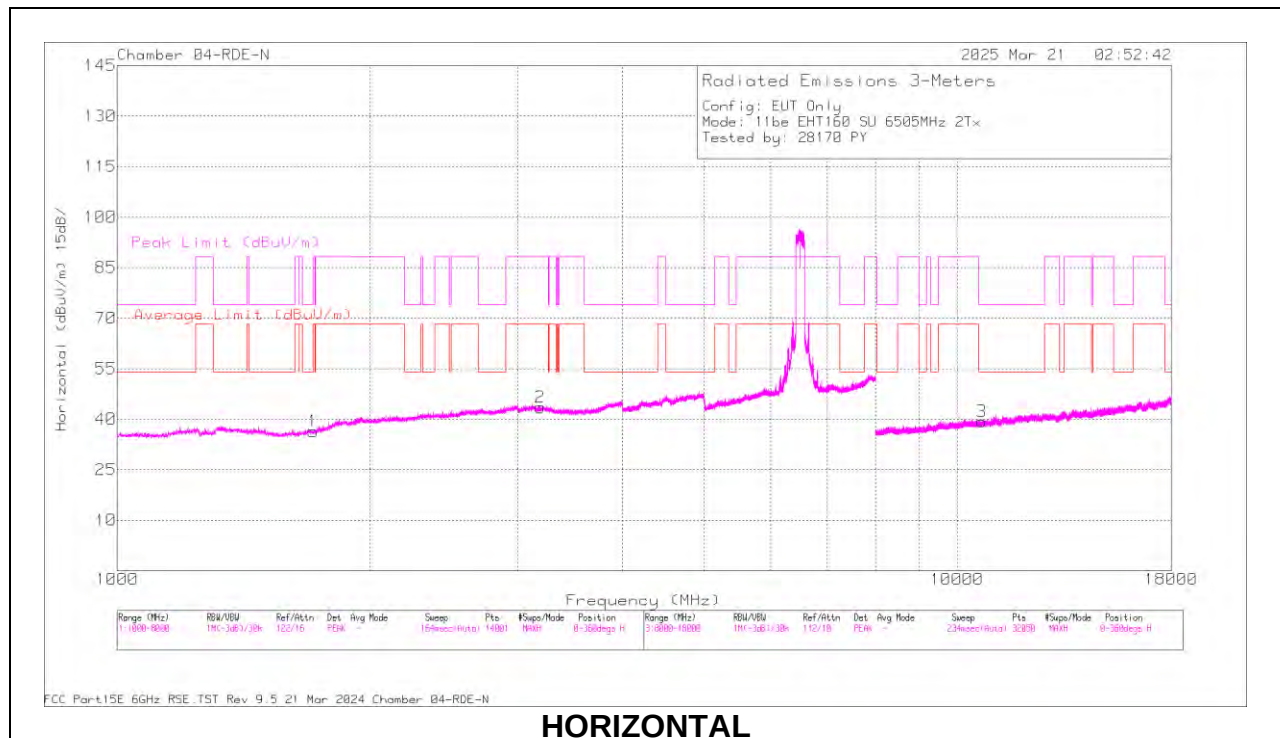
160MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6505 (Straddle)	6 + 5	* 1702.549	46.06	PK-U	29	0	-27.82	47.24	-	-	74	-26.76	0	100	H
			* 1706.455	33.76	ADR	29.1	0	-27.77	35.09	54	-18.91	-	-	0	100	H
			* 1699.993	45.95	PK-U	29	0	-27.81	47.14	-	-	74	-26.86	0	201	V
			* 1701.578	33.78	ADR	29	0	-27.81	34.97	54	-19.03	-	-	0	201	V
			* 10711.474	57.12	PK-U	37.7	0	-45.44	49.38	-	-	74	-24.62	0	100	H
			* 10723.332	45.42	ADR	37.7	0	-45.75	37.37	54	-16.63	-	-	0	100	H
			* 10684.073	56.98	PK-U	37.7	0	-45.75	48.93	-	-	74	-25.07	0	201	V
			* 10676.612	45.3	ADR	37.6	0	-45.8	37.1	54	-16.9	-	-	0	201	V
			3175.615	34.12	ADR	33	0	-26.07	41.05	68.2	-27.15	-	-	0	100	H
			3200.876	45.58	PK-U	33	0	-26.05	52.53	-	-	88.2	-35.67	0	100	H
			3206.094	45.82	PK-U	33	0	-25.97	52.85	-	-	88.2	-35.35	0	200	V
			3216.456	34.05	ADR	33	0	-26.11	40.94	68.2	-27.26	-	-	0	200	V
11be (106T Mode / Highest PSD)	6505 (Straddle)	6 + 5	* 1.530571	56.52	PK-U	28.1	0	-46.26	38.36	-	-	74	-35.64	354	289	H
			* 1.531268	44.83	ADR	28.1	0.12	-46.3	26.75	54	-27.25	-	-	354	289	H
			* 4.272838	56.28	PK-U	33.7	0	-46.52	43.46	-	-	74	-30.54	1	138	H
			* 4.270437	44.48	ADR	33.7	0.12	-46.6	31.7	54	-22.3	-	-	1	138	H
			* 1.535273	57.1	PK-U	28.1	0	-46.3	38.9	-	-	74	-35.1	304	214	V
			* 1.535314	45.22	ADR	28.1	0.12	-46.3	27.14	54	-26.86	-	-	304	214	V
			* 4.27125	55.25	PK-U	33.7	0	-46.6	42.35	-	-	74	-31.65	147	119	V
			* 4.269192	43.81	ADR	33.7	0.12	-46.52	31.11	54	-22.89	-	-	147	119	V
			* 11.839621	52.33	PK-U	38.5	0	-41.5	49.33	-	-	74	-24.67	147	101	H
			* 11.836428	40.94	ADR	38.5	0.12	-41.6	37.96	54	-16.04	-	-	147	101	H
			* 11.842695	52.34	PK-U	38.5	0	-41.4	49.44	-	-	74	-24.56	147	199	V
			* 11.841107	40.75	ADR	38.5	0.12	-41.49	37.88	54	-16.12	-	-	147	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6505MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 1702.549	46.06	PK-U	29	0	-27.82	47.24	-	-	74	-26.76	0	100	H
	* 1706.455	33.76	ADR	29.1	0	-27.77	35.09	54	-18.91	-	-	0	100	H
6	* 1699.993	45.95	PK-U	29	0	-27.81	47.14	-	-	74	-26.86	0	201	V
	* 1701.578	33.78	ADR	29	0	-27.81	34.97	54	-19.03	-	-	0	201	V
1	* 10711.47	57.12	PK-U	37.7	0	-45.44	49.38	-	-	74	-24.62	0	100	H
	* 10723.33	45.42	ADR	37.7	0	-45.75	37.37	54	-16.63	-	-	0	100	H
4	* 10684.07	56.98	PK-U	37.7	0	-45.75	48.93	-	-	74	-25.07	0	201	V
	* 10676.61	45.3	ADR	37.6	0	-45.8	37.1	54	-16.9	-	-	0	201	V
2	3175.615	34.12	ADR	33	0	-26.07	41.05	68.2	-27.15	-	-	0	100	H
	3200.876	45.58	PK-U	33	0	-26.05	52.53	-	-	88.2	-35.67	0	100	H
5	3206.094	45.82	PK-U	33	0	-25.97	52.85	-	-	88.2	-35.35	0	200	V
	3216.456	34.05	ADR	33	0	-26.11	40.94	68.2	-27.26	-	-	0	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS

20MHz

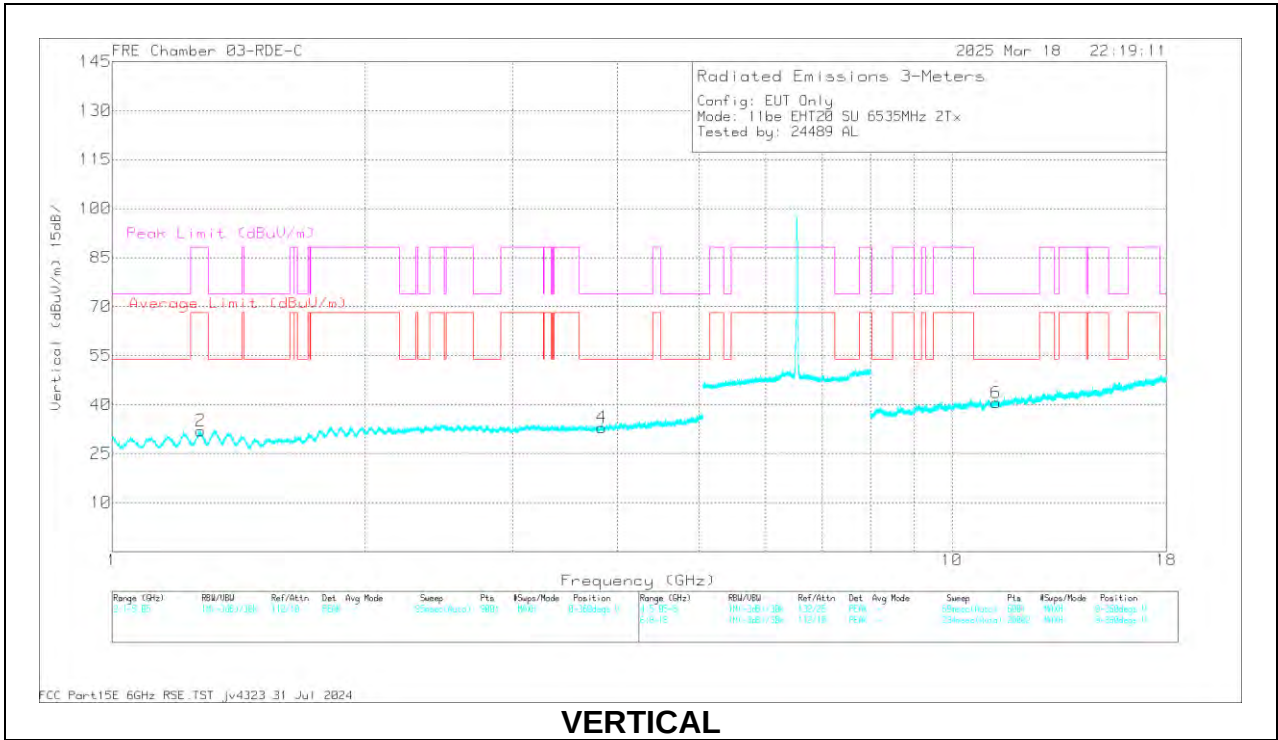
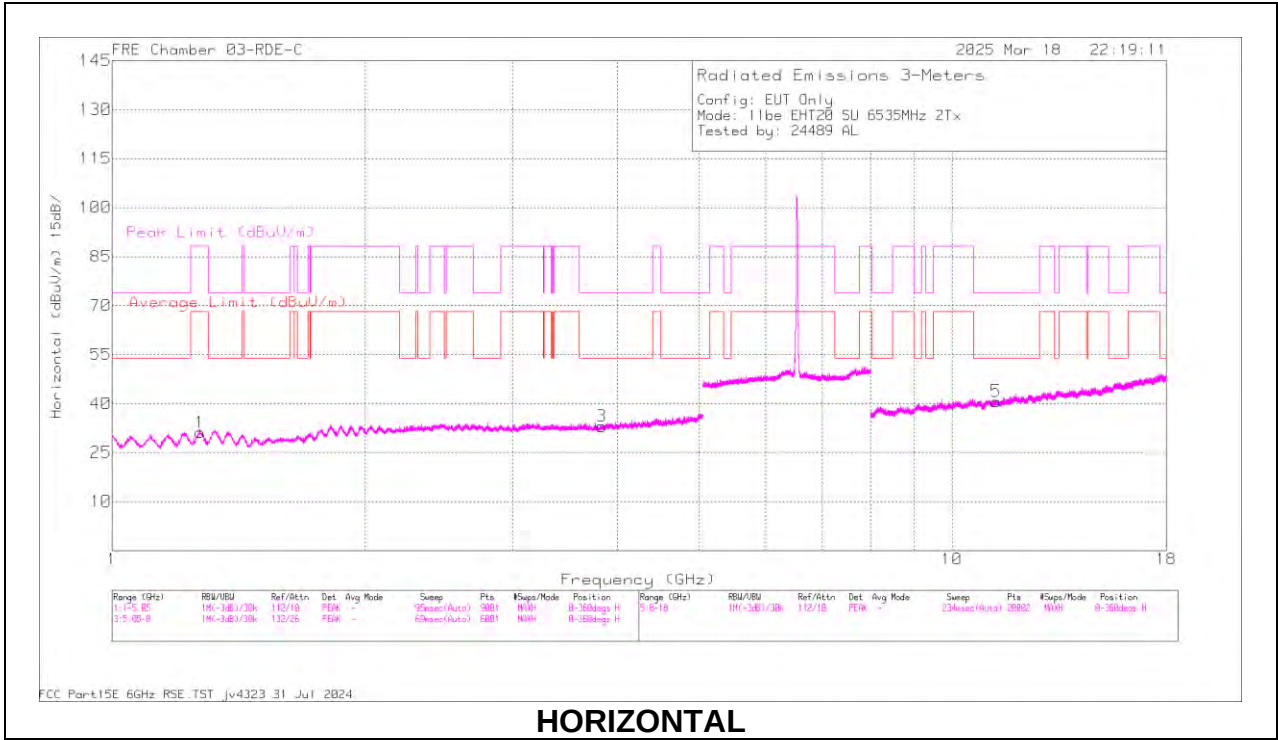
UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Fr tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6535	6 + 5	* 1.270934	60.17	PK-U	29.3	0	-47.9	41.57	-	-	88.2	-46.63	360	101	H
			* 1.272176	48.51	ADR	29.3	0	-47.9	29.91	68.2	-38.29	-	-	360	101	H
			* 3.825806	55.98	PK-U	33	0	-45.78	43.2	-	-	74	-30.8	360	101	H
			* 3.827058	44.48	ADR	33	0	-45.8	31.68	54	-22.32	-	-	360	101	H
			* 1.274833	60.6	PK-U	29.4	0	-47.88	42.12	-	-	88.2	-46.08	360	101	V
			* 1.274219	48.65	ADR	29.4	0	-47.82	30.23	68.2	-37.97	-	-	360	101	V
			* 3.831029	56.12	PK-U	33	0	-45.8	43.32	-	-	74	-30.68	360	200	V
			* 3.828504	44.44	ADR	33	0	-45.8	31.64	54	-22.36	-	-	360	200	V
			* 11.283525	56.08	PK-U	38.1	0	-43.4	50.78	-	-	74	-23.22	360	200	H
			* 11.284969	44.3	ADR	38.1	0	-43.4	39	54	-15	-	-	360	200	H
			* 11.288257	56.01	PK-U	38.1	0	-43.4	50.71	-	-	74	-23.29	360	200	V
			* 11.287602	44.33	ADR	38.1	0	-43.4	39.03	54	-14.97	-	-	360	200	V
	6715	6 + 5	* 1.216254	60.57	PK-U	28.9	0	-48	41.47	-	-	74	-32.53	360	199	H
			* 1.216872	48.8	ADR	28.9	0	-48	29.7	54	-24.3	-	-	360	199	H
			* 3.914879	56.51	PK-U	33.3	0	-45.9	43.91	-	-	74	-30.09	360	199	H
			* 3.91276	44.4	ADR	33.3	0	-45.9	31.8	54	-22.2	-	-	360	199	H
			* 1.217044	60.84	PK-U	28.9	0	-48	41.74	-	-	74	-32.26	360	199	V
			* 1.216891	48.96	ADR	28.9	0	-48	29.86	54	-24.14	-	-	360	199	V
			* 3.916176	56.56	PK-U	33.3	0	-45.8	44.06	-	-	74	-29.94	360	199	V
			* 3.917388	44.54	ADR	33.3	0	-45.8	32.04	54	-21.96	-	-	360	199	V
			* 11.484203	55.43	PK-U	38.3	0	-43.3	50.43	-	-	74	-23.57	360	101	H
			* 11.484417	44.01	ADR	38.3	0	-43.3	39.01	54	-14.99	-	-	360	101	H
			* 11.479886	55.93	PK-U	38.3	0	-43.3	50.93	-	-	74	-23.07	360	101	V
			* 11.478828	43.98	ADR	38.3	0	-43.32	38.96	54	-15.04	-	-	360	101	V
	6875 (Straddle)	6 + 5	* 1.27259	60.18	PK-U	29.3	0	-47.9	41.58	-	-	88.2	-46.62	360	198	H
			* 1.275639	48.47	ADR	29.4	0	-47.9	29.97	68.2	-38.23	-	-	360	198	H
			* 3.861255	55.95	PK-U	33.1	0	-45.8	43.25	-	-	74	-30.75	360	101	H
			* 3.862066	44.27	ADR	33.1	0	-45.8	31.57	54	-22.43	-	-	360	101	H
			* 1.274662	60.49	PK-U	29.4	0	-47.87	42.02	-	-	88.2	-46.18	360	199	V
			* 1.273184	48.69	ADR	29.3	0	-47.88	30.11	68.2	-38.09	-	-	360	199	V
			* 3.863329	56.14	PK-U	33.1	0	-45.83	43.41	-	-	74	-30.59	360	101	V
			* 3.860878	44.38	ADR	33.1	0	-45.8	31.68	54	-22.32	-	-	360	101	V
			* 11.484435	55.58	PK-U	38.3	0	-43.3	50.58	-	-	74	-23.42	360	101	H
			* 11.485175	44.05	ADR	38.3	0	-43.32	39.03	54	-14.97	-	-	360	101	H
			* 11.483656	55.76	PK-U	38.3	0	-43.3	50.76	-	-	74	-23.24	360	101	V
			* 11.481321	44.1	ADR	38.3	0	-43.23	39.17	54	-14.83	-	-	360	101	V
11be (106T Mode / Highest PSD)	6535	6 + 5	* 9.015377	53.74	PK-U	35.9	0	-42.3	47.34	-	-	74	-26.66	0	101	H
			* 9.013615	41.96	ADR	35.9	0	-42.3	35.56	54	-18.44	-	-	0	101	H
			13.079207	53.13	PK-U	38.8	0	-41.2	50.73	-	-	88.2	-37.47	0	101	H
			13.081882	41.8	ADR	38.8	0	-41.29	39.31	68.2	-28.89	-	-	0	101	H
			* 17.997756	55.51	PK-U	41.1	0	-40.2	56.41	-	-	74	-17.59	0	200	H
			* 17.996885	43.66	ADR	41.1	0	-40.2	44.56	54	-9.44	-	-	0	200	H
			* 9.010434	53.32	PK-U	35.9	0	-42.3	46.92	-	-	74	-27.08	0	101	V
			* 9.010648	41.92	ADR	35.9	0	-42.3	35.52	54	-18.48	-	-	0	101	V
			13.07439	53.62	PK-U	38.8	0	-41.2	51.22	-	-	88.2	-36.98	0	101	V
			13.076443	41.78	ADR	38.8	0	-41.2	39.38	68.2	-28.82	-	-	0	101	V
			* 17.999594	55.06	PK-U	41.1	0	-40.2	55.96	-	-	74	-18.04	0	200	V
			* 17.999784	43.7	ADR	41.1	0	-40.2	44.6	54	-9.4	-	-	0	200	V
	6715	6 + 5	* 9.060188	55.19	PK-U	35.9	0	-42.48	48.61	-	-	74	-25.39	2	101	H
			* 9.059956	42.72	ADR	35.9	0	-42.5	36.12	54	-17.88	-	-	2	101	H
			13.444225	53.55	PK-U	39.1	0	-41.5	51.15	-	-	88.2	-37.05	2	200	H
			13.442858	41.96	ADR	39.1	0	-41.4	39.66	68.2	-28.54	-	-	2	200	H
			* 17.994207	55.57	PK-U	41.1	0	-40.2	56.47	-	-	74	-17.53	2	200	H
			* 17.997262	43.72	ADR	41.1	0	-40.2	44.62	54	-9.38	-	-	2	200	H
			* 9.06013	53.99	PK-U	35.9	0	-42.49	47.4	-	-	74	-26.6	2	101	V
			* 9.05717	42.68	ADR	35.9	0	-42.5	36.08	54	-17.92	-	-	2	101	V
			13.44561	53.76	PK-U	39.1	0	-41.5	51.36	-	-	88.2	-36.84	2	101	V
			13.445796	42.03	ADR	39.1	0	-41.5	39.63	68.2	-28.57	-	-	2	101	V
			* 17.996321	55.01	PK-U	41.1	0	-40.2	55.91	-	-	74	-18.09	2	101	V
			* 17.997956	43.72	ADR	41.1	0	-40.2	44.62	54	-9.38	-	-	2	101	V
	6875	6 + 5	* 9.009824	53.86	PK-U	35.9	0	-42.28	47.48	-	-	74	-26.52	360	101	H
			* 9.010551	41.79	ADR	35.9	0	-42.3	35.39	54	-18.61	-	-	360	101	H
			13.720542	53.76	PK-U	39	0	-40.8	51.96	-	-	88.2	-36.24	360	200	H
			13.721294	42.17	ADR	39	0	-40.8	40.37	68.2	-27.83	-	-	360	200	H
			* 17.968802	55.68	PK-U	41.2	0	-40.6	56.28	-	-	74	-17.72	360	200	H
			* 17.968801	43.97	ADR	41.2	0	-40.6	44.57	54	-9.43	-	-	360	200	H
			* 9.012504	53.78	PK-U	35.9	0	-42.3	47.38	-	-	74	-26.62	360	101	V
			* 9.010916	41.89	ADR	35.9	0	-42.3	35.49	54	-18.51	-	-	360	101	V
			13.725321	54.44	PK-U	39	0	-40.73	52.71	-	-	88.2	-35.49	360	200	V
			13.724122	42.19	ADR	39	0	-40.79	40.4	68.2	-27.8	-	-	360	200	V
			* 17.969885	55.19	PK-U	41.2	0	-40.6	55.79	-	-	74	-18.21	360	101	V
			* 17.969846	44.08	ADR	41.2	0	-40.6	44.68	54	-9.32	-	-	360	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6535MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.270934	60.17	PK-U	29.3	0	-47.9	41.57	-	-	88.2	-46.63	360	101	H
	* 1.272176	48.51	ADR	29.3	0	-47.9	29.91	68.2	-38.29	-	-	360	101	H
3	* 3.825806	55.98	PK-U	33	0	-45.78	43.2	-	-	74	-30.8	360	101	H
	* 3.827058	44.48	ADR	33	0	-45.8	31.68	54	-22.32	-	-	360	101	H
2	* 1.274833	60.6	PK-U	29.4	0	-47.88	42.12	-	-	88.2	-46.08	360	101	V
	* 1.274219	48.65	ADR	29.4	0	-47.82	30.23	68.2	-37.97	-	-	360	101	V
4	* 3.831029	56.12	PK-U	33	0	-45.8	43.32	-	-	74	-30.68	360	200	V
	* 3.828504	44.44	ADR	33	0	-45.8	31.64	54	-22.36	-	-	360	200	V
5	* 11.283525	56.08	PK-U	38.1	0	-43.4	50.78	-	-	74	-23.22	360	200	H
	* 11.284969	44.3	ADR	38.1	0	-43.4	39	54	-15	-	-	360	200	H
6	* 11.288257	56.01	PK-U	38.1	0	-43.4	50.71	-	-	74	-23.29	360	200	V
	* 11.287602	44.33	ADR	38.1	0	-43.4	39.03	54	-14.97	-	-	360	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

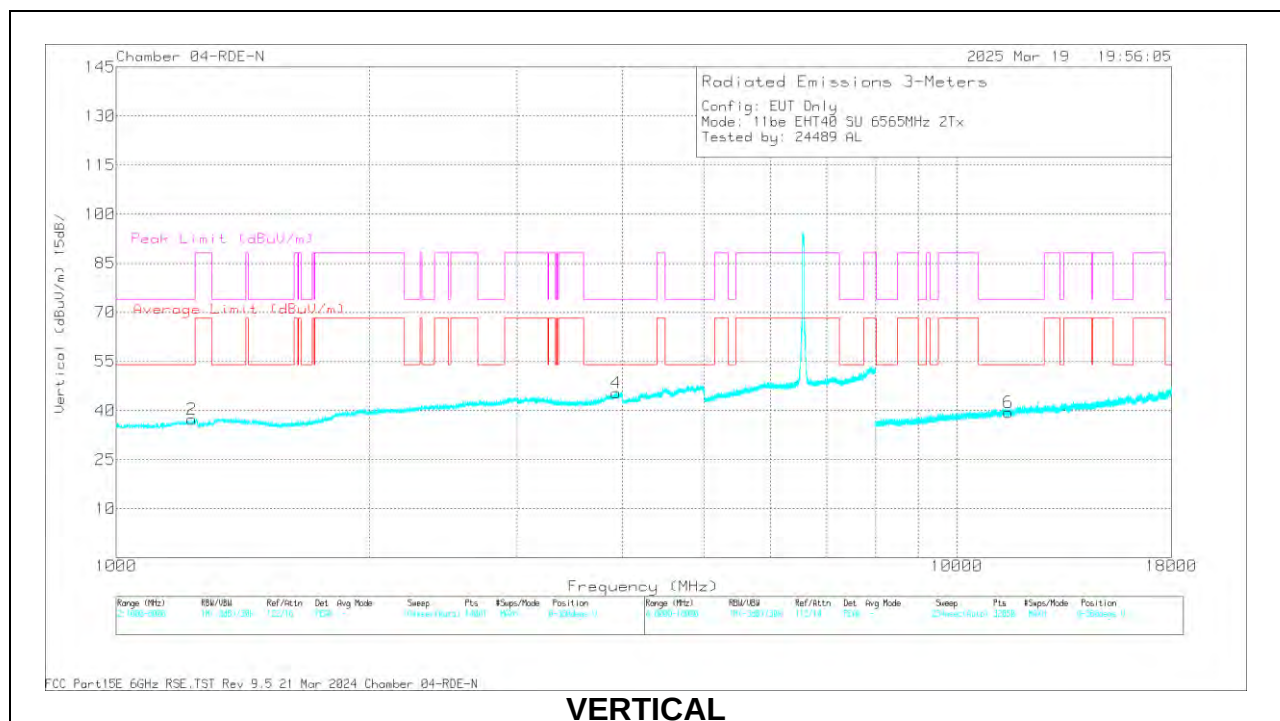
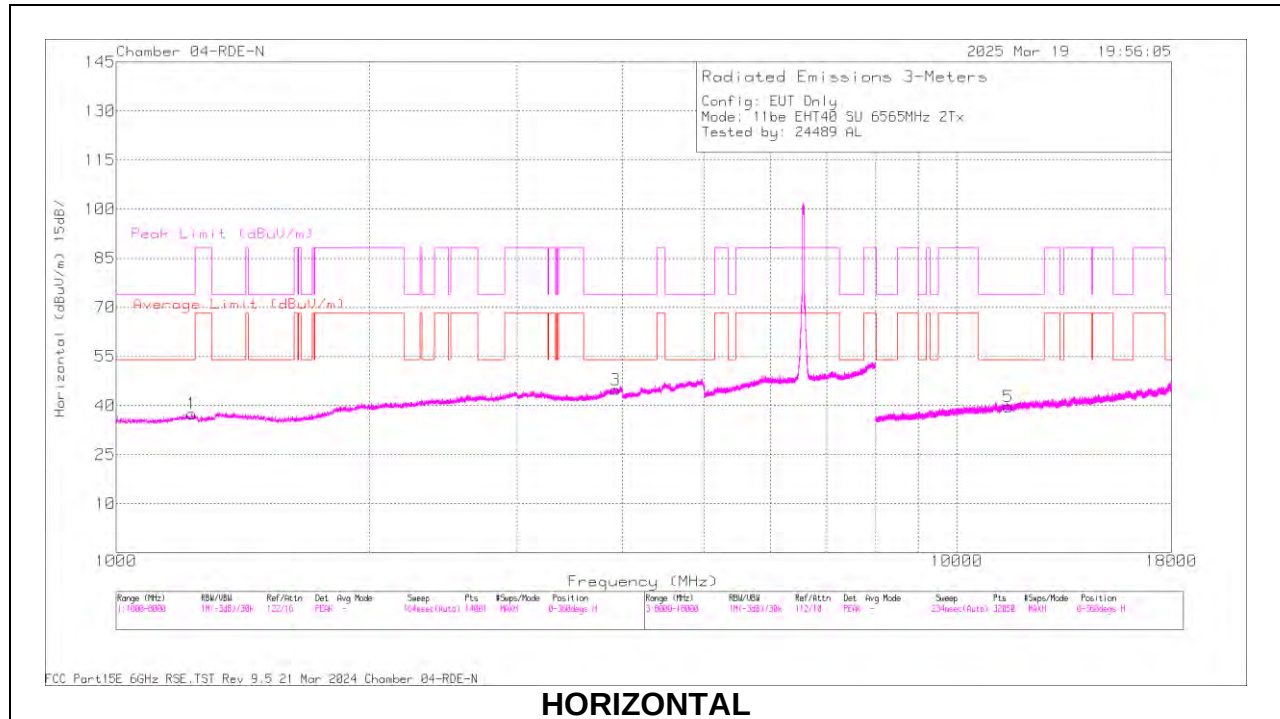
40MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6565	6 + 5	* 1224.018	45.82	PK-U	28.8	0	-28.19	46.43	-	-	74	-27.57	360	100	H
			* 1210.524	34.14	ADR	28.7	0	-28.17	34.67	54	-19.33	-	-	360	100	H
			* 3941.391	45.57	PK-U	33.9	0	-25.76	53.71	-	-	74	-20.29	360	100	H
			* 3939.325	34.02	ADR	33.9	0	-25.76	42.16	54	-11.84	-	-	360	100	H
			* 1233.02	45.72	PK-U	28.9	0	-28.11	46.51	-	-	74	-27.49	360	201	V
			* 1214.933	34.22	ADR	28.7	0	-28.13	34.79	54	-19.21	-	-	360	201	V
			* 3929.572	46.08	PK-U	33.9	0	-25.65	54.33	-	-	74	-19.67	360	200	V
			* 3916.781	34.29	ADR	33.9	0	-25.6	42.59	54	-11.41	-	-	360	200	V
			* 11515.043	56.6	PK-U	38.3	0	-45.42	49.48	-	-	74	-24.52	360	100	H
			* 11498.836	44.78	ADR	38.3	0	-45.22	37.86	54	-16.14	-	-	360	100	H
			* 11499.802	56.62	PK-U	38.3	0	-45.21	49.71	-	-	74	-24.29	360	201	V
			* 11516.942	44.77	ADR	38.3	0	-45.38	37.69	54	-16.31	-	-	360	201	V
	6685	6 + 5	* 1508.606	47.36	PK-U	28.1	0	-27.91	47.55	-	-	74	-26.45	360	100	H
			* 1468.654	34.78	ADR	28.3	0	-27.77	35.31	54	-18.69	-	-	360	100	H
			* 3839.946	46.4	PK-U	33.8	0	-25.65	54.55	-	-	74	-19.45	360	100	H
			* 3840.089	34.23	ADR	33.8	0	-25.65	42.38	54	-11.62	-	-	360	100	H
			* 1446.197	45.92	PK-U	28.4	0	-27.87	46.45	-	-	74	-27.55	360	201	V
			* 1444.274	34.25	ADR	28.4	0	-27.85	34.8	54	-19.2	-	-	360	201	V
			* 3857.253	45.91	PK-U	33.8	0	-25.71	54	-	-	74	-20	360	200	V
			* 3843.808	34.25	ADR	33.8	0	-25.66	42.39	54	-11.61	-	-	360	200	V
			* 11573.4	56.92	PK-U	38.4	0	-45.33	49.99	-	-	74	-24.01	360	100	H
			* 11560.121	45	ADR	38.4	0	-45.24	38.16	54	-15.84	-	-	360	100	H
			* 11578.27	56.16	PK-U	38.4	0	-45.31	49.25	-	-	74	-24.75	360	201	V
			* 11559.614	45	ADR	38.4	0	-45.22	38.18	54	-15.82	-	-	360	201	V
	6845	6 + 5	* 1341.868	46.42	PK-U	29.1	0	-28.01	47.51	-	-	74	-26.49	360	100	H
			* 1343.214	34.33	ADR	29.1	0	-28.02	35.41	54	-18.59	-	-	360	100	H
			* 3882.598	45.48	PK-U	33.9	0	-25.87	53.51	-	-	74	-20.49	360	100	H
			* 3899.634	33.85	ADR	33.9	0	-25.73	42.02	54	-11.98	-	-	360	100	H
			* 1339.375	46.89	PK-U	29.2	0	-27.99	48.1	-	-	74	-25.9	360	201	V
			* 1333.178	34.27	ADR	29.2	0	-27.97	35.5	54	-18.5	-	-	360	201	V
			* 3894.308	45.51	PK-U	33.9	0	-25.82	53.59	-	-	74	-20.41	360	200	V
			* 3891.354	33.81	ADR	33.9	0	-25.87	41.84	54	-12.16	-	-	360	200	V
			* 11680.809	57	PK-U	38.5	0	-45.23	50.27	-	-	74	-23.73	360	100	H
			* 11662.105	45.08	ADR	38.5	0	-45.4	38.18	54	-15.82	-	-	360	100	H
			* 11668.253	56.84	PK-U	38.5	0	-45.36	49.98	-	-	74	-24.02	360	201	V
			* 11668.099	45.03	ADR	38.5	0	-45.37	38.16	54	-15.84	-	-	360	201	V
11be (106T Mode / Highest PSD)	6565	6 + 5	* 1.354482	62.44	PK-U	29	0	-50.36	41.08	-	-	74	-32.92	0	200	H
			* 1.355505	50.61	ADR	29	0	-50.35	29.26	54	-24.74	-	-	0	200	H
			* 3.98531	57.84	PK-U	33.6	0	-47.73	43.71	-	-	74	-30.29	0	101	H
			* 3.984467	46.14	ADR	33.5	0	-47.72	31.92	54	-22.08	-	-	0	101	H
			* 1.359615	62.85	PK-U	29	0	-50.41	41.44	-	-	74	-32.56	0	200	V
			* 1.356827	50.48	ADR	29	0	-50.36	29.12	54	-24.88	-	-	0	200	V
			* 3.987271	58.1	PK-U	33.6	0	-47.78	43.92	-	-	74	-30.08	0	200	V
			* 3.988011	46.16	ADR	33.6	0	-47.8	31.96	54	-22.04	-	-	0	200	V
			* 11.696779	56.37	PK-U	38.4	0	-44.23	50.54	-	-	74	-23.46	0	101	H
			* 11.694989	44.77	ADR	38.4	0	-44.25	38.92	54	-15.08	-	-	0	101	H
			* 11.696503	56.44	PK-U	38.4	0	-44.23	50.61	-	-	74	-23.39	0	200	V
			* 11.696312	44.68	ADR	38.4	0	-44.22	38.86	54	-15.14	-	-	0	200	V
	6685	6 + 5	* 1.361086	61.6	PK-U	29	0	-50.37	40.23	-	-	74	-33.77	1	101	H
			* 1.361745	50.38	ADR	29	0	-50.38	29	54	-25	-	-	1	101	H
			* 4.072646	58.41	PK-U	33.6	0	-47.77	44.24	-	-	74	-29.76	1	200	H
			* 4.070822	46.85	ADR	33.6	0	-47.69	32.76	54	-21.24	-	-	1	200	H
			* 1.358509	62.03	PK-U	29	0	-50.4	40.63	-	-	74	-33.37	1	200	V
			* 1.35764	50.66	ADR	29	0	-50.38	29.28	54	-24.72	-	-	1	200	V
			* 4.071386	58.2	PK-U	33.6	0	-47.71	44.09	-	-	74	-29.91	1	200	V
			* 4.073106	46.52	ADR	33.6	0	-47.78	32.34	54	-21.66	-	-	1	200	V
			* 11.837932	57.18	PK-U	38.6	0	-43.82	51.96	-	-	74	-22.04	1	200	H
			* 11.839318	44.99	ADR	38.6	0	-43.83	39.76	54	-14.24	-	-	1	200	H
			* 11.841247	56.77	PK-U	38.6	0	-43.81	51.56	-	-	74	-22.44	1	200	V
			* 11.839455	44.88	ADR	38.6	0	-43.83	39.65	54	-14.35	-	-	1	200	V
	6845	6 + 5	* 1.304149	62.1	PK-U	29.4	0	-50.54	40.96	-	-	74	-33.04	360	101	H
			* 1.304131	50.97	ADR	29.4	0	-50.54	29.83	54	-24.17	-	-	360	101	H
			* 3.948618	57.51	PK-U	33.5	0	-47.64	43.37	-	-	74	-30.63	360	101	H
			* 3.946932	46.07	ADR	33.5	0	-47.68	31.89	54	-22.11	-	-	360	101	H
			* 1.30469	62.49	PK-U	29.4	0	-50.56	41.33	-	-	74	-32.67	360	101	V
			* 1.303868	51.05	ADR	29.4	0	-50.53	29.92	54	-24.08	-	-	360	101	V
			* 3.946896	57.51	PK-U	33.5	0	-47.68	43.33	-	-	74	-30.67	360	200	V
			* 3.949169	45.67	ADR	33.5	0	-47.63	31.54	54	-22.46	-	-	360	200	V
			* 11.817557	57.3	PK-U	38.6	0	-44.19	51.71	-	-	74	-22.29	360	101	H
			* 11.817472	45.19	ADR	38.6	0	-44.19	39.6	54	-14.4	-	-	360	101	H
			* 11.820594	56.7	PK-U	38.6	0	-44.14	51.16	-	-	74	-22.84	360	200	V
			* 11.818049	44.97	ADR	38.6	0	-44.19	39.38	54	-14.62	-	-	360	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6565MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	4112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1224.018	45.82	PK-U	28.8	0	-28.19	46.43	-	-	74	-27.57	360	100	H
	* 1210.524	34.14	ADR	28.7	0	-28.17	34.67	54	-19.33	-	-	360	100	H
3	* 3941.391	45.57	PK-U	33.9	0	-25.76	53.71	-	-	74	-20.29	360	100	H
	* 3939.325	34.02	ADR	33.9	0	-25.76	42.16	54	-11.84	-	-	360	100	H
2	* 1233.02	45.72	PK-U	28.9	0	-28.11	46.51	-	-	74	-27.49	360	201	V
	* 1214.933	34.22	ADR	28.7	0	-28.13	34.79	54	-19.21	-	-	360	201	V
4	* 3929.572	46.08	PK-U	33.9	0	-25.65	54.33	-	-	74	-19.67	360	200	V
	* 3916.781	34.29	ADR	33.9	0	-25.6	42.59	54	-11.41	-	-	360	200	V
5	* 11515.043	56.6	PK-U	38.3	0	-45.42	49.48	-	-	74	-24.52	360	100	H
	* 11498.836	44.78	ADR	38.3	0	-45.22	37.86	54	-16.14	-	-	360	100	H
6	* 11499.802	56.62	PK-U	38.3	0	-45.21	49.71	-	-	74	-24.29	360	201	V
	* 11516.942	44.77	ADR	38.3	0	-45.38	37.69	54	-16.31	-	-	360	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

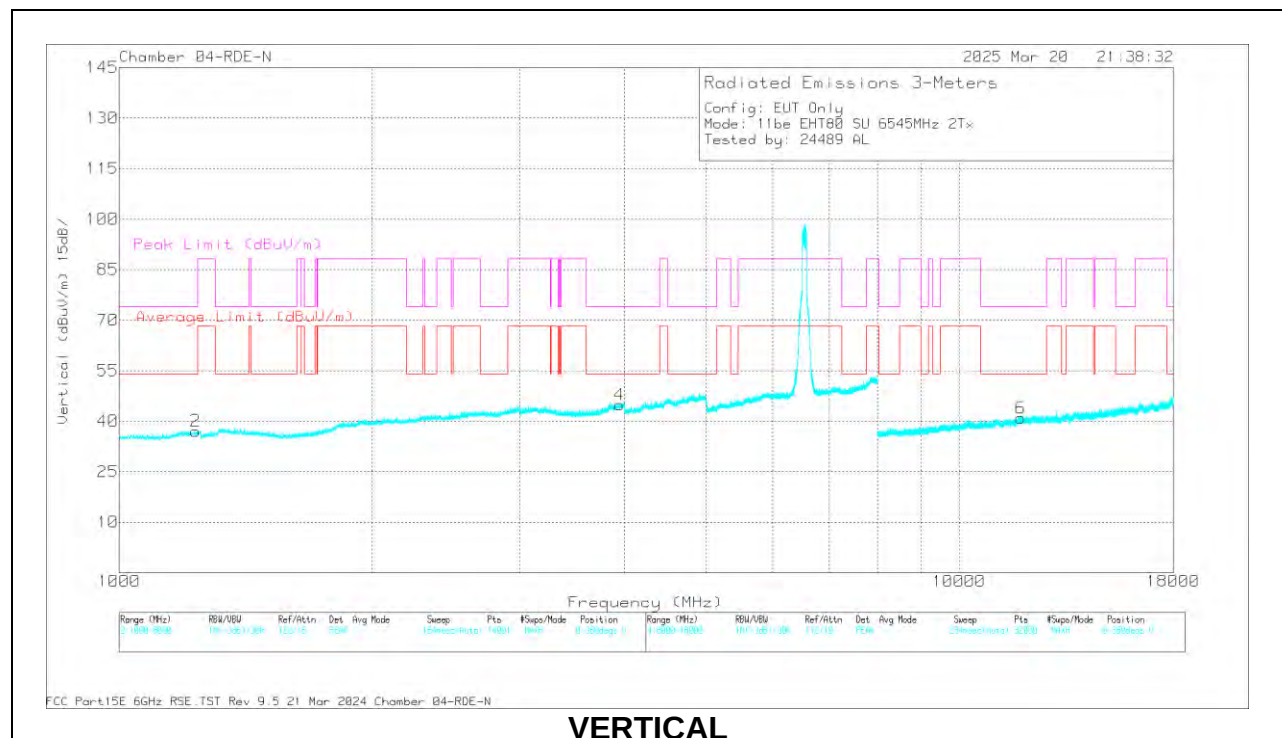
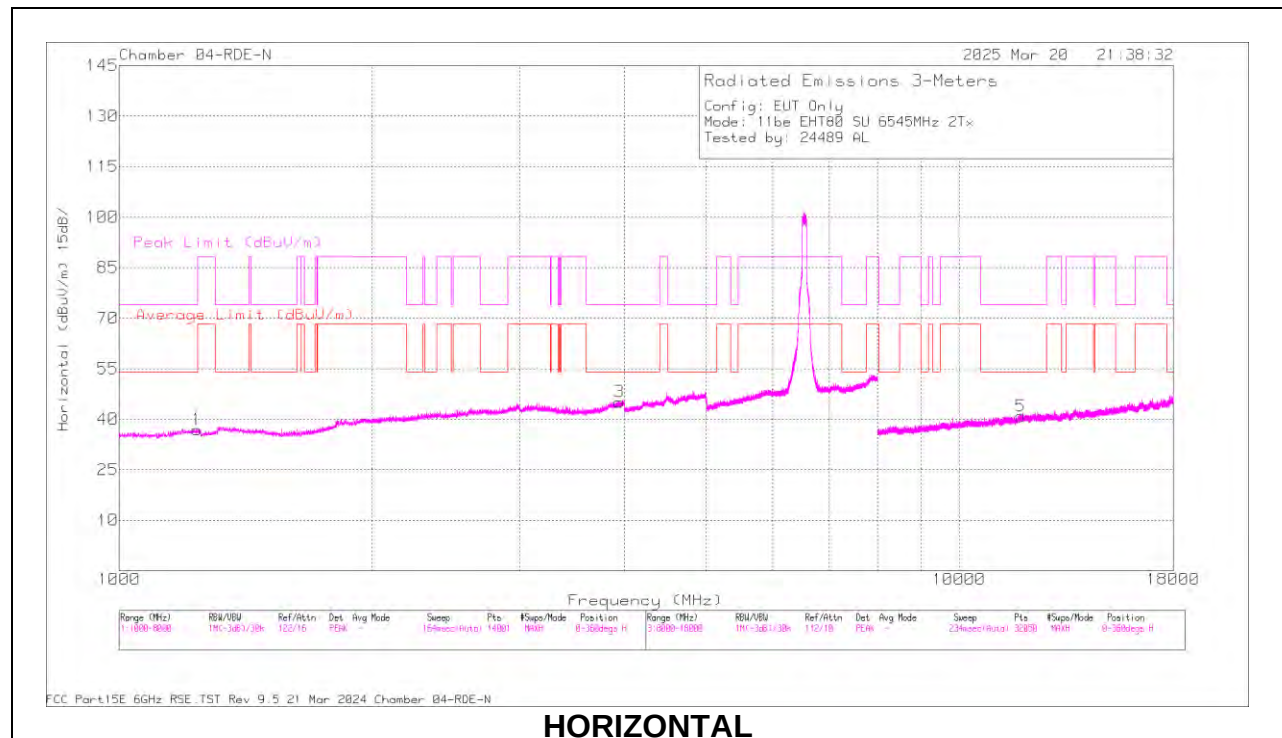
80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Deps)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6545 (Straddle)	6 + 5	* 1251.965	46.26	PK-U	29.1	0	-28.1	47.26	-	-	88.2	-40.94	0	100	H
			* 1239.943	34.01	ADR	29	0	-28.12	34.89	54	-19.11	-	-	0	100	H
			* 3927.232	46.01	PK-U	33.9	0	-25.63	54.28	-	-	74	-19.72	0	100	H
			* 3959.307	34.12	ADR	33.9	0	-25.8	42.22	54	-11.78	-	-	0	100	H
			* 1226.826	45.73	PK-U	28.9	0	-28.15	46.48	-	-	74	-27.52	0	201	V
			* 1216.553	34.02	ADR	28.8	0	-28.13	34.69	54	-19.31	-	-	0	201	V
			* 3961.002	45.94	PK-U	33.9	0	-25.79	54.05	-	-	74	-19.95	0	200	V
			* 3959.653	34.08	ADR	33.9	0	-25.8	42.18	54	-11.82	-	-	0	200	V
			* 11854.854	56.65	PK-U	38.7	0	-45.07	50.28	-	-	74	-23.72	0	100	H
			* 11852.443	45.03	ADR	38.7	0	-45.09	38.64	54	-15.36	-	-	0	100	H
			* 11854.804	56.11	PK-U	38.7	0	-45.07	49.74	-	-	74	-24.26	0	201	V
			* 11852.997	44.95	ADR	38.7	0	-45.07	38.58	54	-15.42	-	-	0	201	V
	6705	6 + 5	* 1248.314	45.74	PK-U	29	0	-28.04	46.7	-	-	88.2	-41.5	0	100	H
			* 1232.443	34.18	ADR	28.9	0	-28.1	34.98	54	-19.02	-	-	0	100	H
			* 3820.753	45.83	PK-U	33.7	0	-25.87	53.66	-	-	74	-20.34	0	100	H
			* 3814.442	34.11	ADR	33.7	0	-25.93	41.88	54	-12.12	-	-	0	100	H
			* 1245.731	45.9	PK-U	29	0	-28.02	46.88	-	-	88.2	-41.32	0	201	V
			* 1257.89	34.1	ADR	29.1	0	-28.03	35.17	68.2	-33.03	-	-	0	201	V
			* 3802.258	45.6	PK-U	33.6	0	-25.95	53.25	-	-	74	-20.75	0	200	V
			* 3828.973	34.06	ADR	33.7	0	-25.78	41.98	54	-12.02	-	-	0	200	V
			* 11824.004	56.4	PK-U	38.7	0	-44.91	50.19	-	-	74	-23.81	0	100	H
			* 11827.165	44.99	ADR	38.7	0	-44.87	38.82	54	-15.18	-	-	0	100	H
			* 11841.634	56.62	PK-U	38.7	0	-44.94	50.38	-	-	74	-23.62	0	201	V
			* 11839.498	44.79	ADR	38.7	0	-44.91	38.58	54	-15.42	-	-	0	201	V
	6865 (straddle)	6 + 5	* 1321.318	45.84	PK-U	29.2	0	-27.98	47.06	-	-	74	-26.94	0	100	H
			* 1334.46	34.33	ADR	29.2	0	-27.96	35.57	54	-18.43	-	-	0	100	H
			* 3865.192	45.99	PK-U	33.8	0	-25.8	53.99	-	-	74	-20.01	0	100	H
			* 3876.254	34.39	ADR	33.8	0	-25.91	42.28	54	-11.72	-	-	0	100	H
			* 1334.803	46.33	PK-U	29.2	0	-27.97	47.56	-	-	74	-26.44	0	201	V
			* 1318.75	34.25	ADR	29.2	0	-27.98	35.47	54	-18.53	-	-	0	201	V
			* 3853.433	46.31	PK-U	33.8	0	-25.66	54.45	-	-	74	-19.55	0	200	V
			* 3883.208	34.43	ADR	33.9	0	-25.87	42.46	54	-11.54	-	-	0	200	V
			* 11366.583	57.2	PK-U	38.2	0	-45.58	49.82	-	-	74	-24.18	0	100	H
			* 11377.379	45.47	ADR	38.2	0	-45.51	38.16	54	-15.84	-	-	0	100	H
			* 11373.295	56.76	PK-U	38.2	0	-45.56	49.4	-	-	74	-24.6	0	201	V
			* 11370	45.3	ADR	38.2	0	-45.56	37.94	54	-16.06	-	-	0	201	V
11be (106+26T Mode / Highest PSD)	6545 (Straddle)	6 + 5	* 1.303113	62.53	PK-U	29.4	0	-50.5	41.43	-	-	74	-32.57	0	101	H
			* 1.300866	51.27	ADR	29.4	0	-50.56	30.11	54	-23.89	-	-	0	101	H
			* 3.926535	57.84	PK-U	33.5	0	-47.51	43.83	-	-	74	-30.17	0	200	H
			* 3.926695	45.99	ADR	33.5	0	-47.53	31.96	54	-22.04	-	-	0	200	H
			* 1.306547	62.53	PK-U	29.4	0	-50.56	41.37	-	-	74	-32.63	0	101	V
			* 1.304343	50.96	ADR	29.4	0	-50.54	29.82	54	-24.18	-	-	0	101	V
			* 3.9242	57.75	PK-U	33.5	0	-47.42	43.83	-	-	74	-30.17	0	101	V
			* 3.922957	46.15	ADR	33.5	0	-47.47	32.18	54	-21.82	-	-	0	101	V
			* 11.738423	56.72	PK-U	38.5	0	-44.52	50.7	-	-	74	-23.3	0	101	H
			* 11.738896	45.37	ADR	38.5	0	-44.5	39.37	54	-14.63	-	-	0	101	H
			* 11.736836	56.44	PK-U	38.5	0	-44.57	50.37	-	-	74	-23.63	0	199	V
			* 11.737877	45.08	ADR	38.5	0	-44.54	39.04	54	-14.96	-	-	0	199	V
	6705	6 + 5	* 1.352676	62.16	PK-U	29	0	-50.34	40.82	-	-	74	-33.18	0	200	H
			* 1.352749	50.81	ADR	29	0	-50.34	29.47	54	-24.53	-	-	0	200	H
			* 4.025742	58.31	PK-U	33.6	0	-47.68	44.23	-	-	74	-29.77	0	200	H
			* 4.026288	46.41	ADR	33.6	0	-47.69	32.32	54	-21.68	-	-	0	200	H
			* 1.357611	62.39	PK-U	29	0	-50.38	41.01	-	-	74	-32.99	0	101	V
			* 1.356808	50.75	ADR	29	0	-50.36	29.39	54	-24.61	-	-	0	101	V
			* 4.029041	58.35	PK-U	33.6	0	-47.78	44.17	-	-	74	-29.83	0	200	V
			* 4.025737	46.52	ADR	33.6	0	-47.68	32.44	54	-21.56	-	-	0	200	V
			* 11.753898	56.62	PK-U	38.5	0	-44.42	50.7	-	-	74	-23.3	0	101	H
			* 11.756269	45.28	ADR	38.5	0	-44.44	39.34	54	-14.66	-	-	0	101	H
			* 11.760291	56.98	PK-U	38.5	0	-44.26	51.22	-	-	74	-22.78	0	200	V
			* 11.756447	45.25	ADR	38.5	0	-44.43	39.32	54	-14.68	-	-	0	200	V
	6865 (Straddle)	6 + 5	* 1.538307	60.97	PK-U	27.8	0	-50.21	38.56	-	-	74	-35.44	360	199	H
			* 1.540531	49.41	ADR	27.8	0	-50.21	27	54	-27	-	-	360	199	H
			* 3.995573	57.99	PK-U	33.6	0	-47.72	43.87	-	-	74	-30.13	360	101	H
			* 3.994924	46.27	ADR	33.6	0	-47.7	32.17	54	-21.83	-	-	360	101	H
			* 1.540865	60.69	PK-U	27.8	0	-50.2	38.29	-	-	74	-35.71	360	101	V
			* 1.540254	49.2	ADR	27.8	0	-50.21	26.79	54	-27.21	-	-	360	101	V
			* 3.993372	58.16	PK-U	33.6	0	-47.71	44.05	-	-	74	-29.95	360	200	V
			* 3.992573	46.24	ADR	33.6	0	-47.73	32.11	54	-21.89	-	-	360	200	V
			* 11.797183	56.89	PK-U	38.6	0	-44.18	51.31	-	-	74	-22.69	360	200	H
			* 11.798598	45.44	ADR	38.6	0	-44.23	39.81	54	-14.19	-	-	360	200	H
			* 11.797995	56.59	PK-U	38.6	0	-44.22	50.97	-	-	74	-23.03	360	200	V
			* 11.798186	45.3	ADR	38.6	0	-44.22	39.68	54	-14.32	-	-	360	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6545MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1251.965	46.26	PK-U	29.1	0	-28.1	47.26	-	-	88.2	-40.94	0	100	H
	* 1239.943	34.01	ADR	29	0	-28.12	34.89	54	-19.11	-	-	0	100	H
3	* 3927.232	46.01	PK-U	33.9	0	-25.63	54.28	-	-	74	-19.72	0	100	H
	* 3959.307	34.12	ADR	33.9	0	-25.8	42.22	54	-11.78	-	-	0	100	H
2	* 1226.826	45.73	PK-U	28.9	0	-28.15	46.48	-	-	74	-27.52	0	201	V
	* 1216.553	34.02	ADR	28.8	0	-28.13	34.69	54	-19.31	-	-	0	201	V
4	* 3961.002	45.94	PK-U	33.9	0	-25.79	54.05	-	-	74	-19.95	0	200	V
	* 3959.653	34.08	ADR	33.9	0	-25.8	42.18	54	-11.82	-	-	0	200	V
5	* 11854.854	56.65	PK-U	38.7	0	-45.07	50.28	-	-	74	-23.72	0	100	H
	* 11852.443	45.03	ADR	38.7	0	-45.09	38.64	54	-15.36	-	-	0	100	H
6	* 11854.804	56.11	PK-U	38.7	0	-45.07	49.74	-	-	74	-24.26	0	201	V
	* 11852.997	44.95	ADR	38.7	0	-45.07	38.58	54	-15.42	-	-	0	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

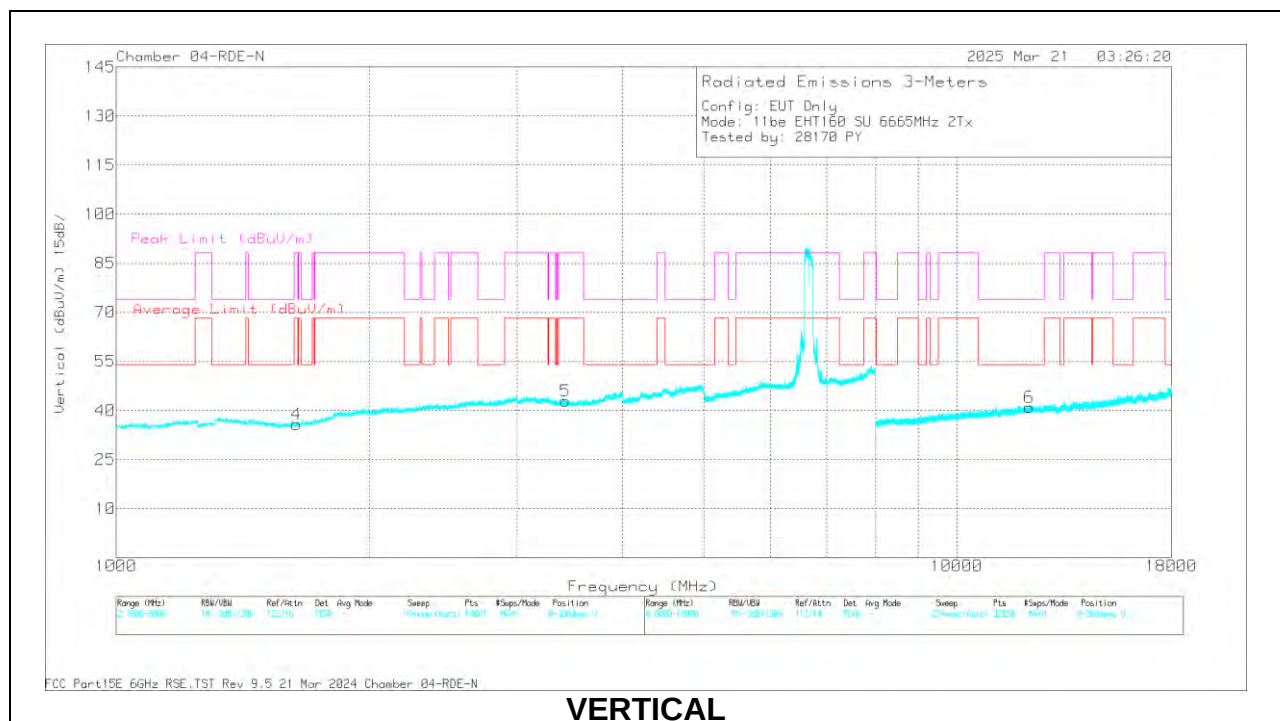
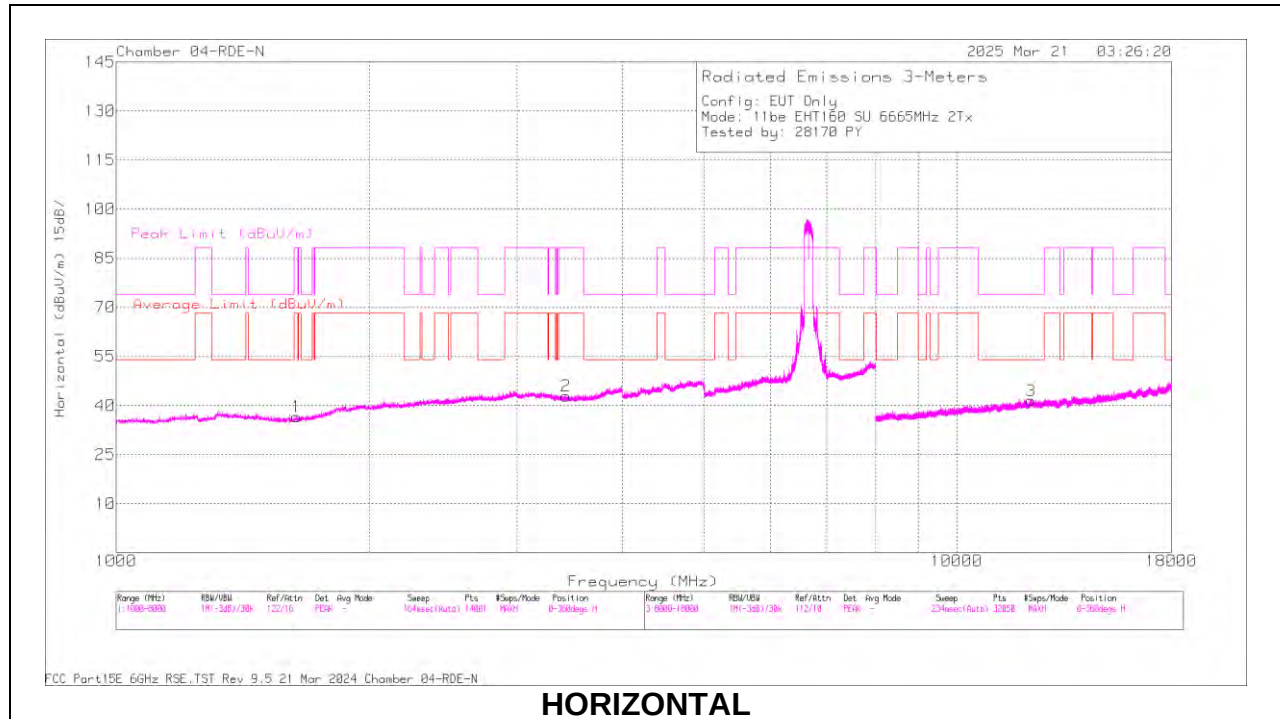
160MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/FF tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6665	6 + 5	* 1621.256	45.99	PK-U	28.2	0	-27.7	46.49	-	-	74	-27.51	0	100	H
			* 1624.204	34.27	ADR	28.2	0	-27.78	34.69	54	-19.31	-	-	0	100	H
			* 1619.399	45.82	PK-U	28.2	0	-27.71	46.31	-	-	74	-27.69	0	201	V
			1631.349	34.15	ADR	28.3	0	-27.78	34.67	68.2	-33.53	-	-	0	201	V
			* 12237.436	56.66	PK-U	38.9	0	-44.68	50.88	-	-	74	-23.12	0	100	H
			* 12271.788	44.5	ADR	38.9	0	-44.85	38.55	54	-15.45	-	-	0	100	H
			* 12187.348	56.22	PK-U	38.9	0	-44.75	50.37	-	-	74	-23.63	0	201	V
			* 12169.935	44.71	ADR	38.9	0	-44.86	38.75	54	-15.25	-	-	0	201	V
			3412.355	45.53	PK-U	32.9	0	-25.93	52.5	-	-	88.2	-35.7	0	200	V
			3426.897	33.51	ADR	33	0	-26.01	40.5	68.2	-27.7	-	-	0	200	V
			3414.044	33.63	ADR	32.9	0	-25.91	40.62	68.2	-27.58	-	-	0	100	H
			3414.584	45.37	PK-U	32.9	0	-25.91	52.36	-	-	88.2	-35.84	0	100	H
	6825 (Straddle)	6 + 5	* 11118.725	57.03	PK-U	38	0	-45.1	49.93	-	-	74	-24.07	0	100	H
			* 11127.084	45.25	ADR	38	0	-44.76	38.49	54	-15.51	-	-	0	100	H
			* 11119.686	57.86	PK-U	38	0	-45.03	50.83	-	-	74	-23.17	0	201	V
			* 11119.019	45.33	ADR	38	0	-45.11	38.22	54	-15.78	-	-	0	201	V
			1872.952	45.92	PK-U	31.1	0	-27.36	49.66	-	-	88.2	-38.54	0	201	V
			1877.661	33.9	ADR	31.2	0	-27.39	37.71	68.2	-30.49	-	-	0	201	V
			1891.68	45.52	PK-U	31.3	0	-27.38	49.44	-	-	88.2	-38.76	0	100	H
			1908.376	33.92	ADR	31.4	0	-27.5	37.82	68.2	-30.38	-	-	0	100	H
			3371.226	33.69	ADR	32.9	0	-26.14	40.45	68.2	-27.75	-	-	0	200	V
			3389.251	45.82	PK-U	32.9	0	-26.06	52.66	-	-	88.2	-35.54	0	200	V
11be (52T Mode / Highest PSD)	6665	6 + 5	* 3354.73	33.68	ADR	32.9	0	-26.05	40.53	54	-13.47	-	-	0	100	H
			3372.7	45.56	PK-U	32.9	0	-26.14	52.32	-	-	88.2	-35.88	0	100	H
			1.649311	55.32	PK-U	28.7	0	-46.37	37.65	-	-	88.2	-50.55	309	383	H
			1.650256	43.1	ADR	28.8	0.09	-46.3	25.69	68.2	-42.51	-	-	309	383	H
			* 3.624507	55.33	PK-U	33.1	0	-45.3	43.13	-	-	74	-30.87	101	243	H
			* 3.627753	43.74	ADR	33.1	0.09	-45.38	31.55	54	-22.45	-	-	101	243	H
			* 1.645827	56.52	PK-U	28.7	0	-46.3	38.92	-	-	74	-35.08	234	276	V
			1.646645	44.55	ADR	28.7	0.09	-46.3	27.04	68.2	-41.16	-	-	234	276	V
			* 3.629745	55.28	PK-U	33.1	0	-45.4	42.98	-	-	74	-31.02	290	185	V
			* 3.628058	43.73	ADR	33.1	0.09	-45.4	31.52	54	-22.48	-	-	290	185	V
	6825 (Straddle)	6 + 5	* 12.465366	51.96	PK-U	38.6	0	-41.26	49.3	-	-	74	-24.7	290	101	H
			* 12.463845	40.61	ADR	38.6	0.09	-41.22	38.08	54	-15.92	-	-	290	101	H
			* 12.464402	52.09	PK-U	38.6	0	-41.24	49.45	-	-	74	-24.55	290	200	V
			* 12.464027	40.62	ADR	38.6	0.09	-41.2	38.11	54	-15.89	-	-	290	200	V
			* 1.550382	57.24	PK-U	28.1	0	-46.3	39.04	-	-	74	-34.96	172	281	H
			* 1.548918	45.32	ADR	28.1	0.09	-46.29	27.22	54	-26.78	-	-	172	281	H
			* 3.550645	54.86	PK-U	33	0	-45.1	42.76	-	-	88.2	-45.44	243	385	H
			* 3.551304	43.43	ADR	33	0.09	-45.1	31.42	68.2	-36.78	-	-	243	385	H
			* 1.553719	57.05	PK-U	28.1	0	-46.17	38.98	-	-	74	-35.02	15	367	V
			* 1.552396	45.33	ADR	28.1	0.09	-46.1	27.42	54	-26.58	-	-	15	367	V
			* 3.554892	54.8	PK-U	33.1	0	-45.2	42.7	-	-	88.2	-45.5	12	115	V
			* 3.555902	43.16	ADR	33.1	0.09	-45.2	31.15	68.2	-37.05	-	-	12	115	V
			* 12.572913	52.94	PK-U	38.7	0	-41.01	50.63	-	-	74	-23.37	12	101	H
			* 12.570832	41.03	ADR	38.7	0.09	-41.18	38.64	54	-15.36	-	-	12	101	H
			* 12.574521	52.63	PK-U	38.7	0	-41.1	50.23	-	-	74	-23.77	12	101	V
			* 12.573315	41.23	ADR	38.7	0.09	-41.03	38.99	54	-15.01	-	-	12	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6665MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1621.256	45.99	PK-U	28.2	0	-27.7	46.49	-	-	74	-27.51	0	100	H
	* 1624.204	34.27	ADR	28.2	0	-27.78	34.69	54	-19.31	-	-	0	100	H
4	* 1619.399	45.82	PK-U	28.2	0	-27.71	46.31	-	-	74	-27.69	0	201	V
	1631.349	34.15	ADR	28.3	0	-27.78	34.67	68.2	-33.53	-	-	0	201	V
3	* 12237.436	56.66	PK-U	38.9	0	-44.68	50.88	-	-	74	-23.12	0	100	H
	* 12271.788	44.5	ADR	38.9	0	-44.85	38.55	54	-15.45	-	-	0	100	H
6	* 12187.348	56.22	PK-U	38.9	0	-44.75	50.37	-	-	74	-23.63	0	201	V
	* 12169.935	44.71	ADR	38.9	0	-44.86	38.75	54	-15.25	-	-	0	201	V
5	3412.355	45.53	PK-U	32.9	0	-25.93	52.5	-	-	88.2	-35.7	0	200	V
	3426.897	33.51	ADR	33	0	-26.01	40.5	68.2	-27.7	-	-	0	200	V
2	3414.044	33.63	ADR	32.9	0	-25.91	40.62	68.2	-27.58	-	-	0	100	H
	3414.584	45.37	PK-U	32.9	0	-25.91	52.36	-	-	88.2	-35.84	0	100	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

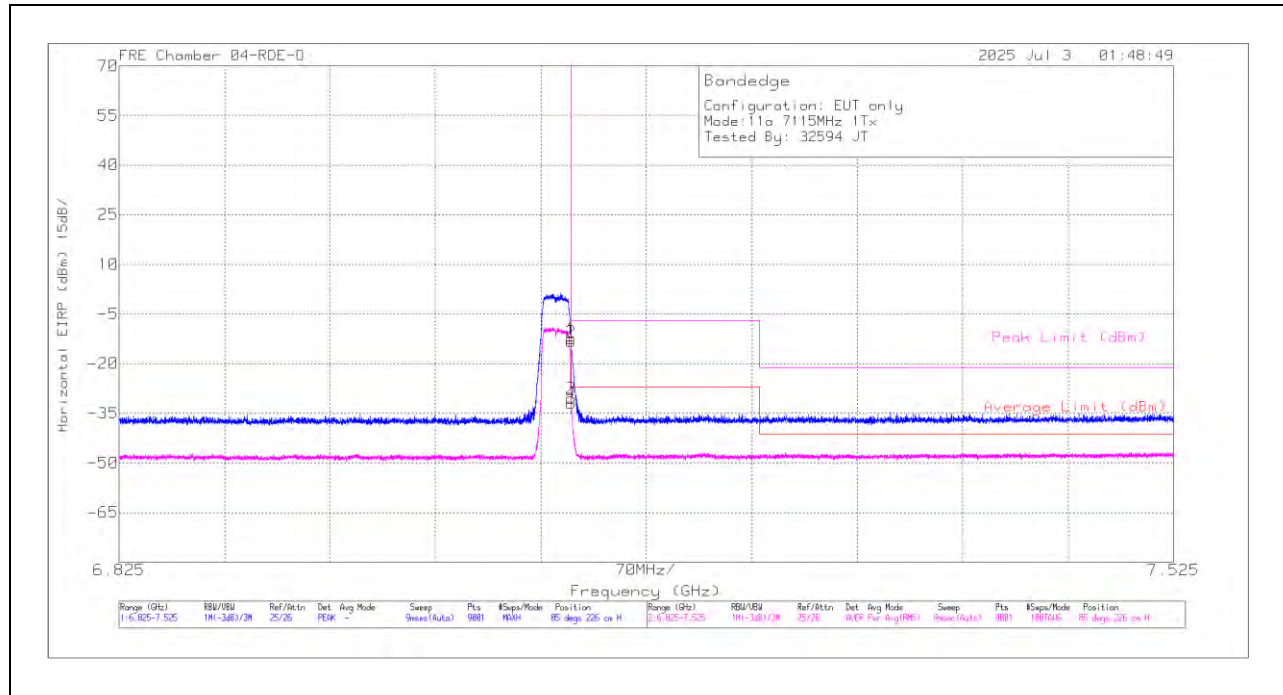
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-26.8	Pk	35.6	11.8	0	-33.02	-12.42	-	-	-7	-5.42	85	226	H
			7.125	-44.83	RMS	35.6	11.8	0	-33.02	-30.45	-27	-3.45	-	-	85	226	H
			7.125068	-27.73	Pk	35.6	11.8	0	-33.02	-13.35	-	-	-7	-6.35	85	226	H
			7.125068	-46.37	RMS	35.6	11.8	0	-33.02	-31.99	-27	-4.99	-	-	85	226	H
			* 7.511235	-61.72	RMS	35.6	11.8	0	-32.37	-46.69	-41.2	-5.49	-	-	130	262	V
			7.125	-33.72	Pk	35.6	11.8	0	-33.02	-19.34	-	-	-7	-12.34	130	262	V
		5	7.125	-50.07	RMS	35.6	11.8	0	-33.02	-35.69	-27	-8.69	-	-	130	262	V
			7.125068	-32.69	Pk	35.6	11.8	0	-33.02	-18.31	-	-	-7	-11.31	130	262	V
			7.125	-27.17	Pk	35.6	11.8	0	-33.02	-12.79	-	-	-7	-5.79	241	374	H
			7.125	-44.42	RMS	35.6	11.8	0	-33.02	-30.04	-27	-3.04	-	-	241	374	H
			7.125068	-28.02	Pk	35.6	11.8	0	-33.02	-13.64	-	-	-7	-6.64	241	374	H
			7.125068	-45.55	RMS	35.6	11.8	0	-33.02	-31.17	-27	-4.17	-	-	241	374	H
			* 7.486502	-49.62	Pk	35.6	11.8	0	-32.35	-34.57	-	-	-21.2	-13.37	260	222	V
			* 7.520335	-61.68	RMS	35.7	11.8	0	-32.55	-46.73	-41.2	-5.53	-	-	260	222	V
			7.125	-35.77	Pk	35.6	11.8	0	-33.02	-21.39	-	-	-7	-14.39	260	222	V
			7.125	-53.53	RMS	35.6	11.8	0	-33.02	-39.15	-27	-12.15	-	-	260	222	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

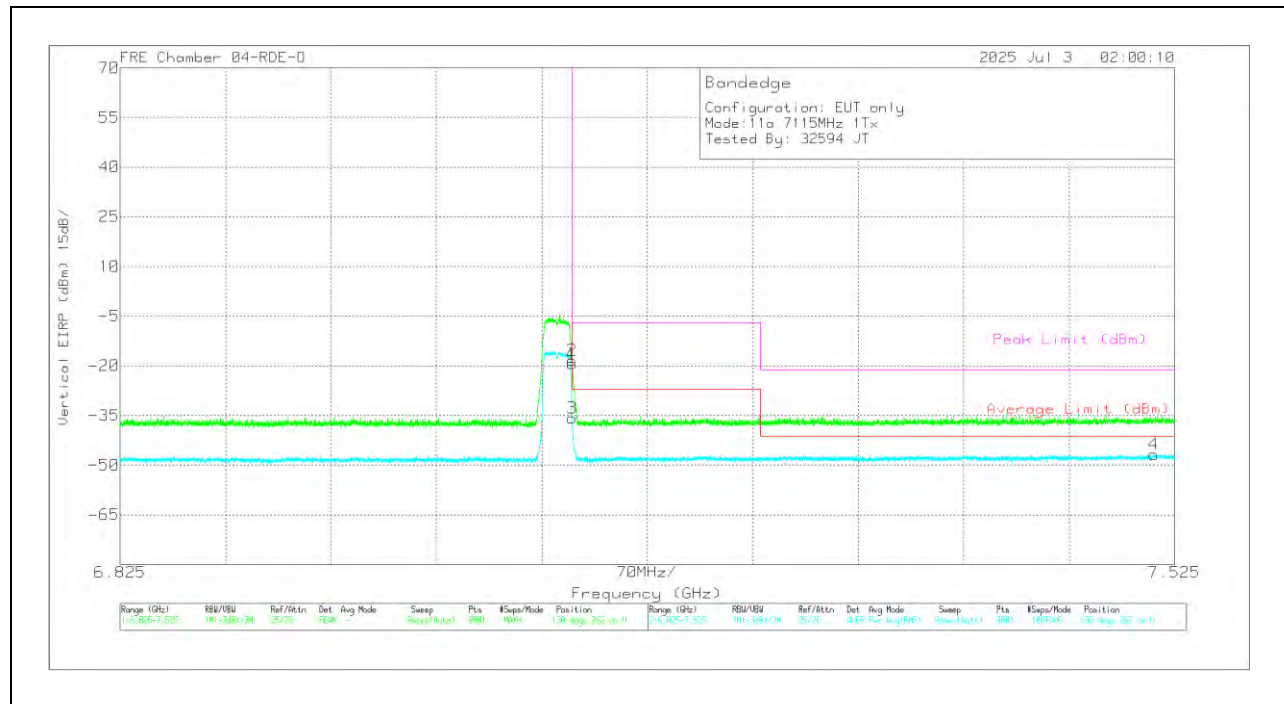
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-26.8	PK	35.6	11.8	0	-33.02	-12.42	-	-	-7	-5.42	85	226	H
3	7.125	-44.83	RMS	35.6	11.8	0	-33.02	-30.45	-27	-3.45	-	-	85	226	H
2	7.125068	-27.73	PK	35.6	11.8	0	-33.02	-13.35	-	-	-7	-6.35	85	226	H
4	7.125068	-46.37	RMS	35.6	11.8	0	-33.02	-31.99	-27	-4.99	-	-	85	226	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.51123	-61.72	RMS	35.6	11.8	0	-32.37	-46.69	-41.2	-5.49	-	-	130	262	V
1	7.125	-33.72	PK	35.6	11.8	0	-33.02	-19.34	-	-	-7	-12.34	130	262	V
3	7.125	-50.07	RMS	35.6	11.8	0	-33.02	-35.69	-27	-8.69	-	-	130	262	V
2	7.125068	-32.69	PK	35.6	11.8	0	-33.02	-18.31	-	-	-7	-11.31	130	262	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

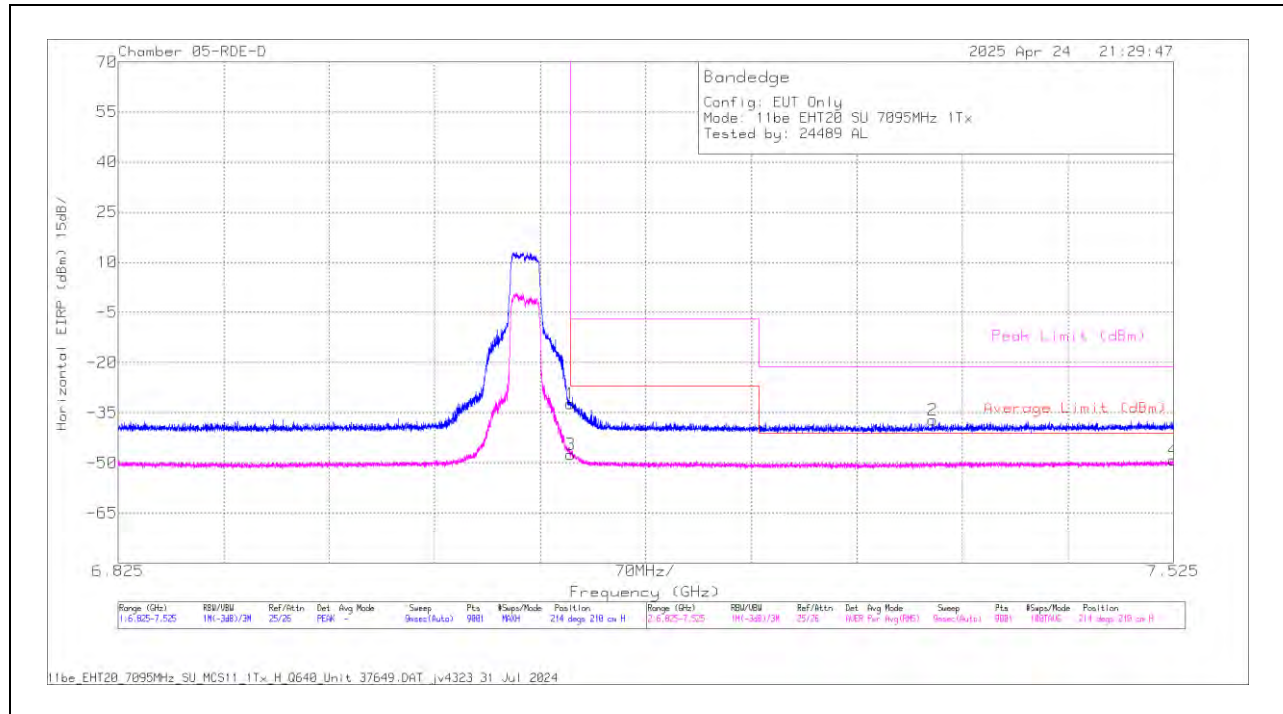
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-42.51	Pk	35.6	11.8	0	-37.18	-32.29	-	-	-7	-25.29	214	210	H
			7.125	-57.73	RMS	35.6	11.8	0	-37.18	-47.51	-27	-20.51	-	-	214	210	H
			7.365402	-46.98	Pk	35.6	11.8	0	-37.64	-37.22	-	-	-21.2	-16.02	214	210	H
			7.524769	-59.25	RMS	35.6	11.8	0	-37.38	-49.23	-41.2	-8.03	-	-	214	210	H
			7.125	-46.8	Pk	35.6	11.8	0	-37.18	-36.58	-	-	-7	-29.58	247	247	V
			7.125	-59.42	RMS	35.6	11.8	0	-37.18	-49.2	-27	-22.2	-	-	247	247	V
			7.440846	-59.35	RMS	35.6	11.8	0	-37.44	-49.39	-41.2	-8.19	-	-	247	247	V
		5	7.504469	-45.99	Pk	35.6	11.8	0	-37.43	-36.02	-	-	-21.2	-14.82	247	247	V
			7.125	-40.21	Pk	35.6	11.8	0	-37.18	-29.99	-	-	-7	-22.99	193	122	H
			7.28599	-47.4	Pk	35.6	11.8	0	-37.56	-37.56	-	-	-21.2	-16.36	193	122	H
			7.125	-57.58	RMS	35.6	11.8	0	-37.18	-47.36	-27	-20.36	-	-	193	122	H
			7.424746	-59.29	RMS	35.6	11.8	0	-37.48	-49.33	-41.2	-8.13	-	-	193	122	H
			7.125	-43.86	Pk	35.6	11.8	0	-37.18	-33.64	-	-	-7	-26.64	175	130	V
			7.413235	-46.63	Pk	35.6	11.8	0	-37.56	-36.79	-	-	-21.2	-15.59	175	130	V
			7.125	-57.76	RMS	35.6	11.8	0	-37.18	-47.54	-27	-20.54	-	-	175	130	V
			7.519713	-59.1	RMS	35.6	11.8	0	-37.41	-49.11	-41.2	-7.91	-	-	175	130	V
EHT40 (SU Mode)	7085	6	* 7.420002	-48.53	Pk	35.6	11.8	0	-35.4	-36.53	-	-	-21.2	-15.33	138	322	H
			* 7.522202	-60.58	RMS	35.7	11.8	0	-35.5	-48.58	-41.2	-7.38	-	-	138	322	H
			7.125	-40.01	Pk	35.7	11.8	0	-35.7	-28.21	-	-	-7	-21.21	138	322	H
			7.125	-56.38	RMS	35.7	11.8	0	-35.7	-44.58	-27	-17.58	-	-	138	322	H
			* 7.351168	-60.64	RMS	35.6	11.8	0	-35.4	-48.64	-41.2	-7.44	-	-	215	209	V
			7.125	-33.63	Pk	35.7	11.8	0	-35.7	-21.83	-	-	-7	-14.83	215	209	V
			7.125	-51.38	RMS	35.7	11.8	0	-35.7	-39.58	-27	-12.58	-	-	215	209	V
		5	7.126623	-32.18	Pk	35.7	11.8	0	-35.64	-20.32	-	-	-7	-13.32	215	209	V
			7.125	-27.63	Pk	35.6	11.8	0	-37.18	-17.41	-	-	-7	-10.41	191	184	H
			7.125	-44.42	RMS	35.6	11.8	0	-37.18	-34.2	-27	-7.2	-	-	191	184	H
			7.125301	-25.06	Pk	35.6	11.8	0	-37.17	-14.83	-	-	-7	-7.83	191	184	H
			7.125923	-43.47	RMS	35.6	11.8	0	-37.16	-33.23	-27	-6.23	-	-	191	184	H
			7.125	-31.47	Pk	35.6	11.8	0	-37.18	-21.25	-	-	-7	-14.25	178	127	V
			7.125	-48.54	RMS	35.6	11.8	0	-37.18	-38.32	-27	-11.32	-	-	178	127	V
			7.128645	-29.47	Pk	35.6	11.8	0	-37.2	-19.27	-	-	-7	-12.27	178	127	V
			7.471724	-59.47	RMS	35.6	11.8	0	-37.43	-49.5	-41.2	-8.3	-	-	178	127	V
EHT80 (SU Mode)	7025	6	7.125	-41.52	Pk	35.6	11.8	0	-37.18	-31.3	-	-	-7	-24.3	223	252	H
			7.125	-57.35	RMS	35.6	11.8	0	-37.18	-47.13	-27	-20.13	-	-	223	252	H
			7.409735	-46.78	Pk	35.6	11.8	0	-37.58	-36.96	-	-	-21.2	-15.76	223	252	H
			7.521346	-59.5	RMS	35.6	11.8	0	-37.4	-49.5	-41.2	-8.3	-	-	223	252	H
			7.125	-46.57	Pk	35.6	11.8	0	-37.18	-36.35	-	-	-7	-29.35	244	229	V
			7.125	-58.66	RMS	35.6	11.8	0	-37.18	-48.44	-27	-21.44	-	-	244	229	V
			7.288868	-47.38	Pk	35.6	11.8	0	-37.62	-37.6	-	-	-21.2	-16.4	244	229	V
		5	7.523369	-59.48	RMS	35.6	11.8	0	-37.37	-49.45	-41.2	-8.25	-	-	244	229	V
			7.125	-36.43	Pk	35.6	11.8	0	-37.18	-26.21	-	-	-7	-19.21	193	153	H
			7.125	-54.25	RMS	35.6	11.8	0	-37.18	-44.03	-27	-17.03	-	-	193	153	H
			7.368202	-47.15	Pk	35.6	11.8	0	-37.64	-37.39	-	-	-21.2	-16.19	193	153	H
			7.495835	-59.26	RMS	35.6	11.8	0	-37.36	-49.22	-41.2	-8.02	-	-	193	153	H
			7.125	-40.72	Pk	35.6	11.8	0	-37.18	-30.5	-	-	-7	-23.5	225	146	V
			7.125	-56.9	RMS	35.6	11.8	0	-37.18	-46.68	-27	-19.68	-	-	225	146	V
			7.463713	-47.49	Pk	35.6	11.8	0	-37.57	-37.66	-	-	-21.2	-16.46	225	146	V
			7.50618	-59.29	RMS	35.6	11.8	0	-37.44	-49.33	-41.2	-8.13	-	-	225	146	V
EHT160 (SU Mode)	6985	6	7.125	-37.8	Pk	35.6	11.8	0	-37.18	-27.58	-	-	-7	-20.58	191	141	H
			7.125	-53.63	RMS	35.6	11.8	0.14	-37.18	-43.27	-27	-16.27	-	-	191	141	H
			7.29299	-46.22	Pk	35.6	11.8	0	-37.65	-36.47	-	-	-21.2	-15.27	191	141	H
			7.510613	-59.22	RMS	35.6	11.8	0.14	-37.46	-49.14	-41.2	-7.94	-	-	191	141	H
			7.125	-44.58	Pk	35.6	11.8	0	-37.18	-34.36	-	-	-7	-27.36	230	109	V
			7.125	-58.98	RMS	35.6	11.8	0.14	-37.18	-48.62	-27	-21.62	-	-	230	109	V
			7.450724	-46.4	Pk	35.6	11.8	0	-37.51	-36.51	-	-	-21.2	-15.31	230	109	V
		5	7.503146	-59.3	RMS	35.6	11.8	0.14	-37.38	-49.14	-41.2	-7.94	-	-	230	109	V
			* 7.265768	-48.35	Pk	35.6	11.8	0	-35.18	-36.13	-	-	-21.2	-14.93	142	110	H
			* 7.369213	-60.37	RMS	35.6	11.8	0.14	-35.5	-48.33	-41.2	-7.13	-	-	142	110	H
			7.125	-39.51	Pk	35.7	11.8	0	-35.7	-27.71	-	-	-7	-20.71	142	110	H
			7.125	-56.19	RMS	35.7	11.8	0.14	-35.7	-44.25	-27	-17.25	-	-	142	110	H
			* 7.386635	-48.55	Pk	35.6	11.8	0	-35.54	-36.69	-	-	-21.2	-15.49	201	200	V
			* 7.264212	-60.65	RMS	35.6	11.8	0.14	-35.1	-48.21	-41.2	-7.01	-	-	201	200	V
			7.125	-39.52	Pk	35.7	11.8	0	-35.7	-27.72	-	-	-7	-20.72	201	200	V
			7.125	-55.17	RMS	35.7	11.8	0.14	-35.7	-43.23	-27	-16.23	-	-	201	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

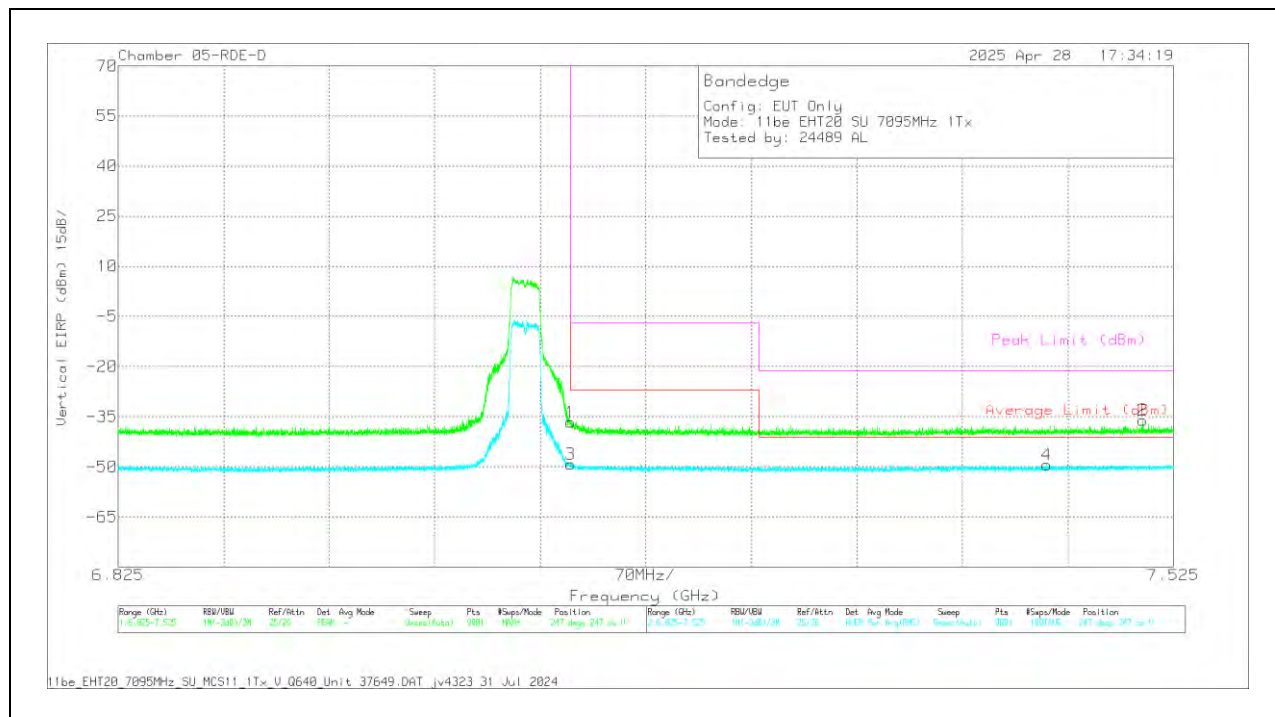
RMS - RMS detection

1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-42.51	Pk	35.6	11.8	0	-37.18	-32.29	-	-	-7	-25.29	214	210	H
3	7.125	-57.73	RMS	35.6	11.8	0	-37.18	-47.51	-27	-20.51	-	-	214	210	H
2	7.365402	-46.98	Pk	35.6	11.8	0	-37.64	-37.22	-	-	-21.2	-16.02	214	210	H
4	7.524769	-59.25	RMS	35.6	11.8	0	-37.38	-49.23	-41.2	-8.03	-	-	214	210	H

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-46.8	Pk	35.6	11.8	0	-37.18	-36.58	-	-	-7	-29.58	247	247	V
3	7.125	-59.42	RMS	35.6	11.8	0	-37.18	-49.2	-27	-22.2	-	-	247	247	V
4	7.440846	-59.35	RMS	35.6	11.8	0	-37.44	-49.39	-41.2	-8.19	-	-	247	247	V
2	7.504469	-45.99	Pk	35.6	11.8	0	-37.43	-36.02	-	-	-21.2	-14.82	247	247	V

Pk - Peak detector

RMS - RMS detection

1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6	7.125	-48.89	Pk	35.6	11.8	0	-37.18	-38.67	-	-	-7	-31.67	219	222	H
			7.125	-60.3	RMS	35.6	11.8	0	-37.18	-50.08	-27	-23.08	-	-	219	222	H
			7.474602	-47.42	Pk	35.6	11.8	0	-37.47	-37.49	-	-	-21.2	-16.29	219	222	H
			7.491713	-59.22	RMS	35.6	11.8	0	-37.5	-49.32	-41.2	-8.12	-	-	219	222	H
			7.125	-47.99	Pk	35.6	11.8	0	-37.18	-37.77	-	-	-7	-30.77	239	217	V
			7.125	-60.31	RMS	35.6	11.8	0	-37.18	-50.09	-27	-23.09	-	-	239	217	V
		5	7.258457	-47.07	Pk	35.6	11.8	0	-37.6	-37.27	-	-	-21.2	-16.07	239	217	V
			7.463168	-58.89	RMS	35.6	11.8	0	-37.54	-49.03	-41.2	-7.83	-	-	239	217	V
			7.125	-48.72	Pk	35.6	11.8	0	-37.18	-38.5	-	-	-7	-31.5	184	102	H
			7.125	-60.23	RMS	35.6	11.8	0	-37.18	-50.01	-27	-23.01	-	-	184	102	H
			7.284746	-47.03	Pk	35.6	11.8	0	-37.62	-37.25	-	-	-21.2	-16.05	184	102	H
			7.516058	-58.99	RMS	35.6	11.8	0	-37.39	-48.98	-41.2	-7.78	-	-	184	102	H
		5	7.125	-49.54	Pk	35.6	11.8	0	-37.18	-39.32	-	-	-7	-32.32	179	110	V
			7.125	-60.73	RMS	35.6	11.8	0	-37.18	-50.51	-27	-23.51	-	-	179	110	V
			7.452513	-47.13	Pk	35.6	11.8	0	-37.49	-37.22	-	-	-21.2	-16.02	179	110	V
			7.504002	-59.08	RMS	35.6	11.8	0	-37.43	-49.11	-41.2	-7.91	-	-	179	110	V
EHT40 (RU 106 / Index 56)	7085	6	7.125	-50.41	Pk	35.7	11.8	0	-37.13	-40.04	-	-	-7	-33.04	90	297	H
			7.48728	-47.76	Pk	35.6	11.8	0	-37.05	-37.41	-	-	-21.2	-16.21	90	297	H
			7.125	-61.25	RMS	35.7	11.8	0	-37.13	-50.88	-27	-23.88	-	-	90	297	H
			7.432602	-59.65	RMS	35.6	11.8	0	-37.14	-49.39	-41.2	-8.19	-	-	90	297	H
			7.125	-49.71	Pk	35.7	11.8	0	-37.13	-39.34	-	-	-7	-32.34	126	297	V
			7.455857	-47.45	Pk	35.6	11.8	0	-37.13	-37.18	-	-	-21.2	-15.98	126	297	V
		5	7.125	-60.79	RMS	35.7	11.8	0	-37.13	-50.42	-27	-23.42	-	-	126	297	V
			7.336935	-60.07	RMS	35.6	11.8	0	-36.97	-49.64	-41.2	-8.44	-	-	126	297	V
			* 7.46838	-48.16	Pk	35.6	11.8	0	-35.7	-36.46	-	-	-21.2	-15.26	178	253	H
			* 7.340513	-60.46	RMS	35.6	11.8	0	-35.55	-48.61	-41.2	-7.41	-	-	178	253	H
			7.125	-51.03	Pk	35.7	11.8	0	-35.7	-39.23	-	-	-7	-32.23	178	253	H
			7.125	-60.71	RMS	35.7	11.8	0	-35.7	-48.91	-27	-21.91	-	-	178	253	H
		5	* 7.259468	-48.69	Pk	35.6	11.8	0	-35.35	-36.64	-	-	-21.2	-15.44	75	194	V
			* 7.362602	-60.31	RMS	35.6	11.8	0	-35.4	-48.31	-41.2	-7.11	-	-	75	194	V
			7.125	-50.86	Pk	35.7	11.8	0	-35.7	-39.06	-	-	-7	-32.06	75	194	V
			7.125	-61.39	RMS	35.7	11.8	0	-35.7	-49.59	-27	-22.59	-	-	75	194	V
EHT80 (MRU 52+26 / Index 80)	7025	6	* 7.506024	-48.22	Pk	35.7	11.8	0	-35.6	-36.32	-	-	-21.2	-15.12	169	275	H
			* 7.350157	-60.59	RMS	35.6	11.8	0.12	-35.4	-48.47	-41.2	-7.27	-	-	169	275	H
			7.125	-50.71	Pk	35.7	11.8	0	-35.7	-38.91	-	-	-7	-31.91	169	275	H
			7.125	-61.11	RMS	35.7	11.8	0.12	-35.7	-49.19	-27	-22.19	-	-	169	275	H
			* 7.46348	-47.86	Pk	35.6	11.8	0	-35.6	-36.06	-	-	-21.2	-14.86	243	240	V
			* 7.259312	-60.6	RMS	35.6	11.8	0.12	-35.37	-48.45	-41.2	-7.25	-	-	243	240	V
		5	7.125	-50.79	Pk	35.7	11.8	0	-35.7	-38.99	-	-	-7	-31.99	243	240	V
			7.125	-61.69	RMS	35.7	11.8	0.12	-35.7	-49.77	-27	-22.77	-	-	243	240	V
			* 7.345646	-47.31	Pk	35.6	11.8	0	-35.44	-35.35	-	-	-21.2	-14.15	223	286	H
			* 7.376913	-60.43	RMS	35.6	11.8	0.12	-35.41	-48.32	-41.2	-7.12	-	-	223	286	H
			7.125	-51.16	Pk	35.7	11.8	0	-35.7	-39.36	-	-	-7	-32.36	223	286	H
			7.125	-61.01	RMS	35.7	11.8	0.12	-35.7	-49.09	-27	-22.09	-	-	223	286	H
		5	* 7.501435	-48.27	Pk	35.7	11.8	0	-35.6	-36.37	-	-	-21.2	-15.17	220	185	V
			* 7.355835	-60.28	RMS	35.6	11.8	0.12	-35.58	-48.34	-41.2	-7.14	-	-	220	185	V
			7.125	-50.77	Pk	35.7	11.8	0	-35.7	-38.97	-	-	-7	-31.97	220	185	V
			7.125	-61.05	RMS	35.7	11.8	0.12	-35.7	-49.13	-27	-22.13	-	-	220	185	V
EHT160 (RU 52 / Index S52)	6985	6	7.125	-52.23	Pk	35.7	11.8	0	-34.4	-39.13	-	-	-7	-32.13	357	194	H
			* 7.524769	-49.44	Pk	35.6	11.8	0	-33.6	-35.64	-	-	-21.2	-14.44	357	194	H
			7.125	-62.94	RMS	35.7	11.8	0	-34.4	-49.84	-27	-22.84	-	-	357	194	H
			* 7.498091	-61.84	RMS	35.6	11.8	0	-33.3	-47.74	-41.2	-6.54	-	-	357	194	H
			7.125	-52.45	Pk	35.7	11.8	0	-34.4	-39.35	-	-	-7	-32.35	9	274	V
			* 7.477713	-49.36	Pk	35.6	11.8	0	-33.67	-35.63	-	-	-21.2	-14.43	9	274	V
		5	7.125	-62.73	RMS	35.7	11.8	0	-34.4	-49.63	-27	-22.63	-	-	9	274	V
			* 7.496613	-61.85	RMS	35.6	11.8	0	-33.36	-47.81	-41.2	-6.61	-	-	9	274	V
			7.125	-51.65	Pk	35.7	11.8	0	-34.4	-38.55	-	-	-7	-31.55	311	137	H
			* 7.432913	-49.64	Pk	35.6	11.8	0	-33.8	-36.04	-	-	-21.2	-14.84	311	137	H
			7.125	-62.53	RMS	35.7	11.8	0	-34.4	-49.43	-27	-22.43	-	-	311	137	H
			* 7.510769	-61.71	RMS	35.6	11.8	0	-33.4	-47.71	-41.2	-6.51	-	-	311	137	H
		5	7.125	-51.86	Pk	35.7	11.8	0	-34.4	-38.76	-	-	-7	-31.76	309	198	V
			* 7.500113	-50.12	Pk	35.6	11.8	0	-33.3	-36.02	-	-	-21.2	-14.82	309	198	V
			7.125	-62.41	RMS	35.7	11.8	0	-34.4	-49.31	-27	-22.31	-	-	309	198	V
			* 7.468846	-61.63	RMS	35.6	11.8	0	-33.6	-47.83	-41.2	-6.63	-	-	309	198	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

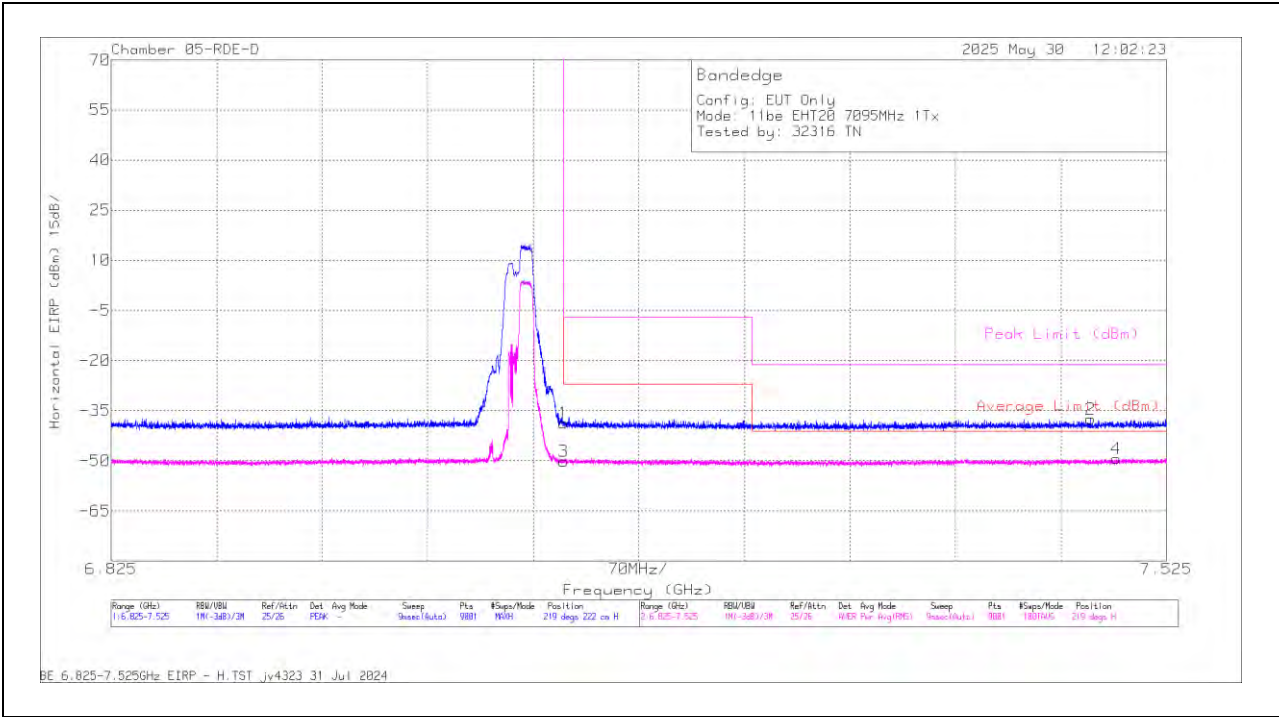
Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE: 106-Tone, RU Index 54

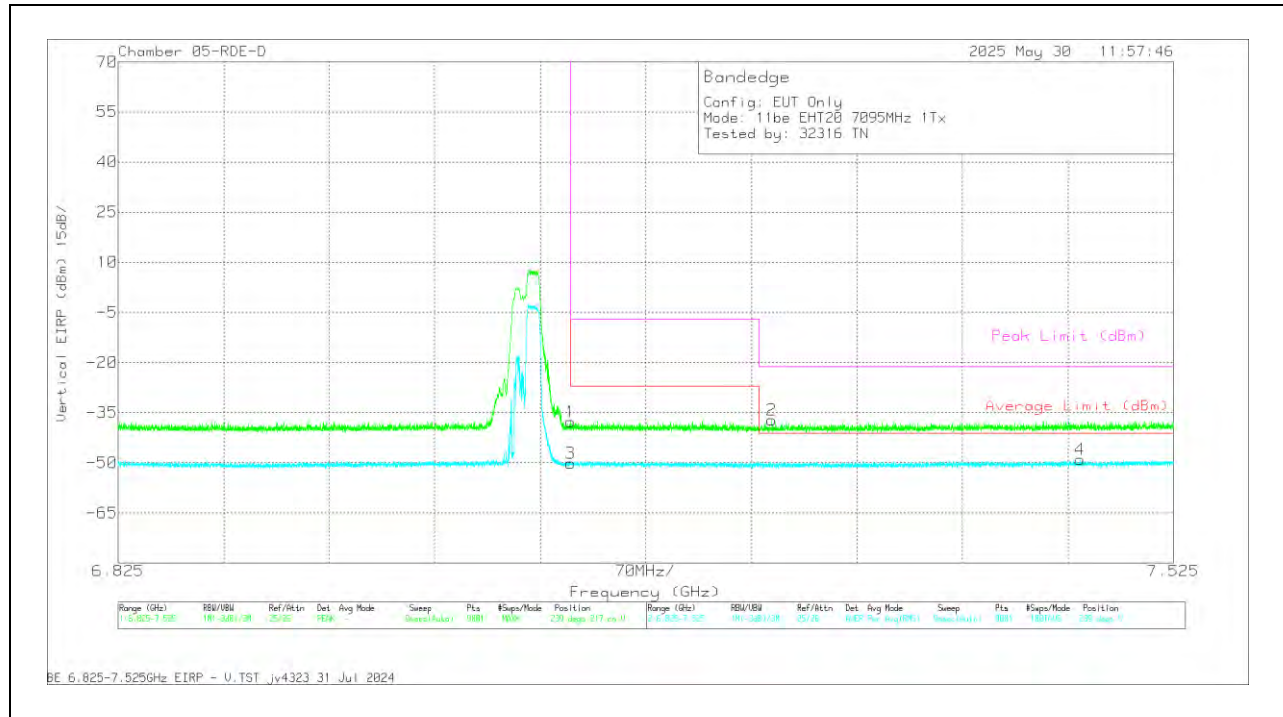
BANDEDGE (HIGH CHANNEL / 7095MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-48.89	Pk	35.6	11.8	0	-37.18	-38.67	-	-	-7	-31.67	219	222	H
3	7.125	-60.3	RMS	35.6	11.8	0	-37.18	-50.08	-27	-23.08	-	-	219	222	H
2	7.474602	-47.42	Pk	35.6	11.8	0	-37.47	-37.49	-	-	-21.2	-16.29	219	222	H
4	7.491713	-59.22	RMS	35.6	11.8	0	-37.5	-49.32	-41.2	-8.12	-	-	219	222	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-47.99	Pk	35.6	11.8	0	-37.18	-37.77	-	-	-7	-30.77	239	217	V
3	7.125	-60.31	RMS	35.6	11.8	0	-37.18	-50.09	-27	-23.09	-	-	239	217	V
2	7.258457	-47.07	Pk	35.6	11.8	0	-37.6	-37.27	-	-	-21.2	-16.07	239	217	V
4	7.463168	-58.89	RMS	35.6	11.8	0	-37.54	-49.03	-41.2	-7.83	-	-	239	217	V

PK - Peak detector
RMS - RMS detection

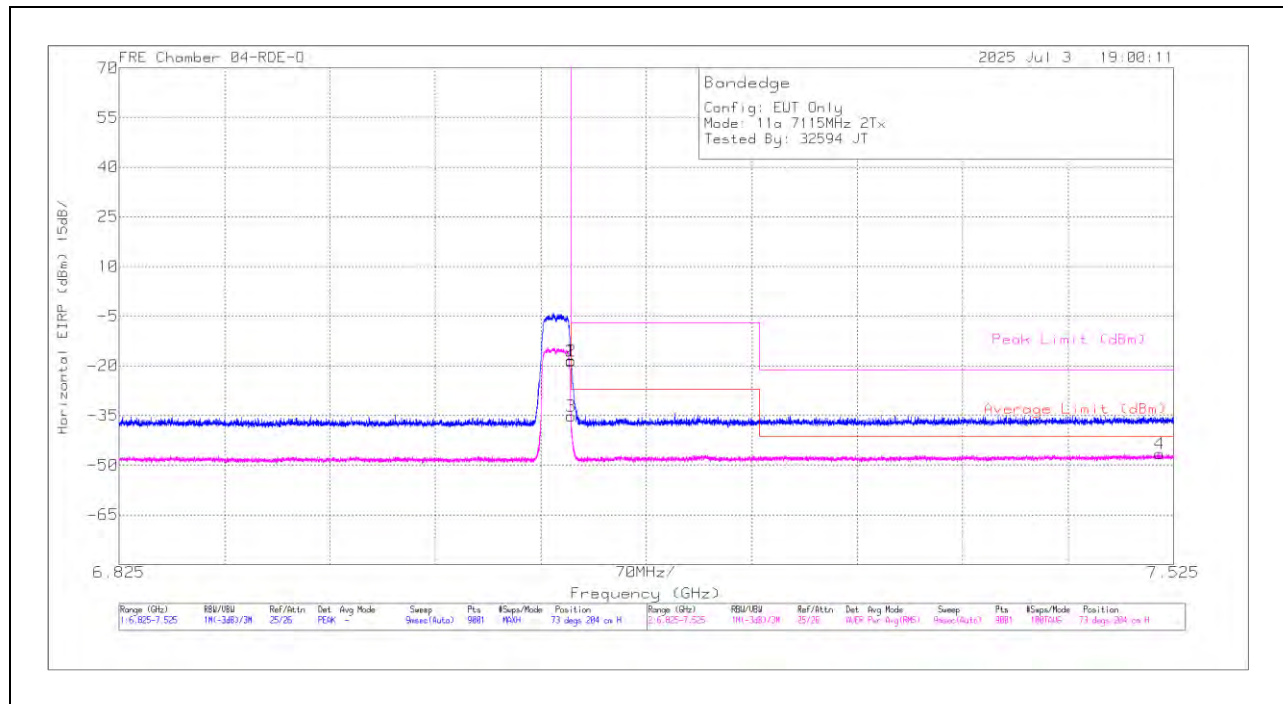
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	* 7.515902	-61.59	RMS	35.7	11.8	0	-32.43	-46.52	-41.2	-5.32	-	-	73	204	H
			7.125	-32.71	Pk	35.6	11.8	0	-33.02	-18.33	-	-	-7	-11.33	73	204	H
			7.125	-49.59	RMS	35.6	11.8	0	-33.02	-35.21	-27	-8.21	-	-	73	204	H
			7.125068	-32.87	Pk	35.6	11.8	0	-33.02	-18.49	-	-	-7	-11.49	73	204	H
			7.125	-26.94	Pk	35.6	11.8	0	-33.02	-12.56	-	-	-7	-5.56	82	244	V
			7.125	-44.56	RMS	35.6	11.8	0	-33.02	-30.18	-27	-3.18	-	-	82	244	V
			7.125068	-27.03	Pk	35.6	11.8	0	-33.02	-12.65	-	-	-7	-5.65	82	244	V
			7.125068	-46.3	RMS	35.6	11.8	0	-33.02	-31.92	-27	-4.92	-	-	82	244	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

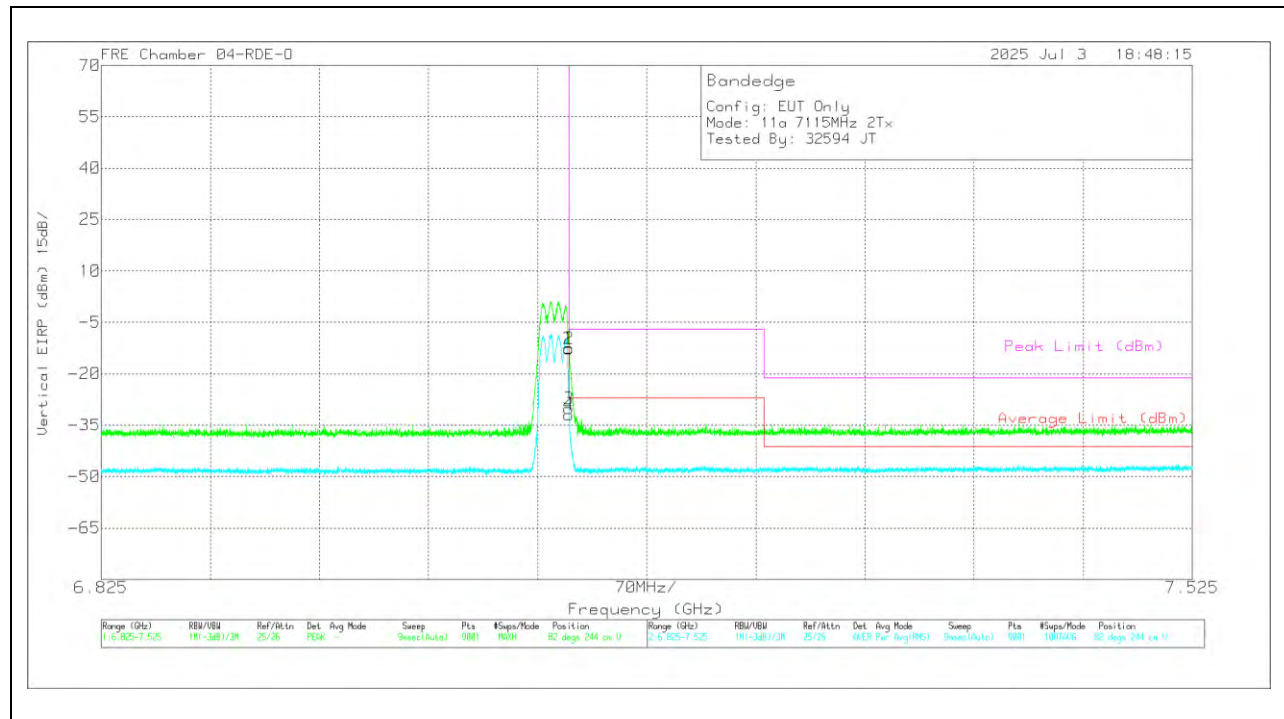
2TX Antenna 6+5 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.51590	-61.59	RMS	35.7	11.8	0	-32.43	-46.52	-41.2	-5.32	-	-	73	204	H
1	7.125	-32.71	PK	35.6	11.8	0	-33.02	-18.33	-	-	-7	-11.33	73	204	H
3	7.125	-49.59	RMS	35.6	11.8	0	-33.02	-35.21	-27	-8.21	-	-	73	204	H
2	7.125068	-32.87	PK	35.6	11.8	0	-33.02	-18.49	-	-	-7	-11.49	73	204	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200896 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.125	-26.94	PK	35.6	11.8	0	-33.02	-12.56	-	-	-7	-5.56	82	244	V
3	* 7.125	-44.56	RMS	35.6	11.8	0	-33.02	-30.18	-27	-3.18	-	-	82	244	V
2	* 7.125068	-27.03	PK	35.6	11.8	0	-33.02	-12.65	-	-	-7	-5.65	82	244	V
4	* 7.125068	-46.3	RMS	35.6	11.8	0	-33.02	-31.92	-27	-4.92	-	-	82	244	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

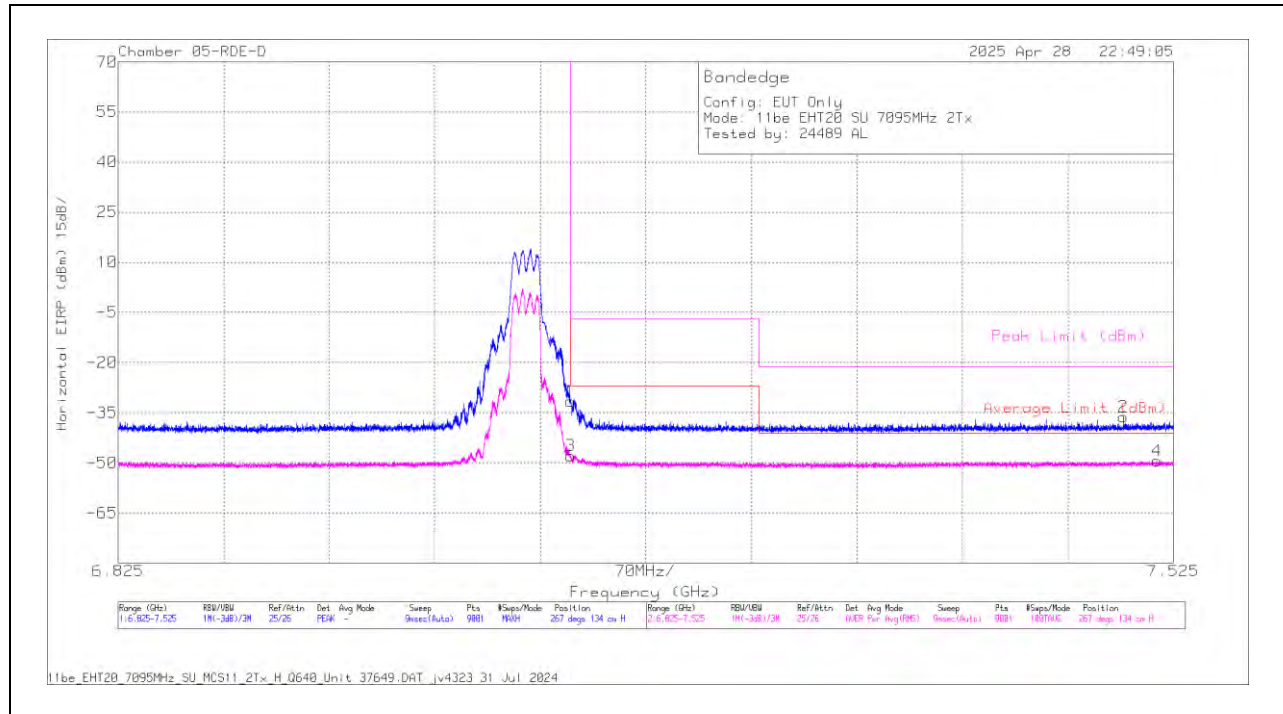
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-41.86	Pk	35.6	11.8	0	-37.18	-31.64	-	-	-7	-24.64	267	134	H
			7.491791	-46.14	Pk	35.6	11.8	0	-37.5	-36.24	-	-	-21.2	-15.04	267	134	H
			7.125	-58.19	RMS	35.6	11.8	0	-37.18	-47.97	-27	-20.97	-	-	267	134	H
			7.514035	-59.33	RMS	35.6	11.8	0	-37.42	-49.35	-41.2	-8.15	-	-	267	134	H
			7.125	-40.69	Pk	35.6	11.8	0	-37.18	-30.47	-	-	-7	-23.47	216	188	V
			7.495369	-47.03	Pk	35.6	11.8	0	-37.38	-37.01	-	-	-21.2	-15.81	216	188	V
			7.125	-56.99	RMS	35.6	11.8	0	-37.18	-46.77	-27	-19.77	-	-	216	188	V
			7.520335	-59.34	RMS	35.6	11.8	0	-37.41	-49.35	-41.2	-8.15	-	-	216	188	V
			7.125	-28.8	Pk	35.6	11.8	0	-37.18	-18.58	-	-	-7	-11.58	163	102	H
EHT40 (SU Mode)	7085	6 + 5	7.125	-46.02	RMS	35.6	11.8	0	-37.18	-35.8	-27	-8.8	-	-	163	102	H
			7.127712	-25.78	Pk	35.6	11.8	0	-37.2	-15.58	-	-	-7	-8.58	163	102	H
			7.127945	-42.06	RMS	35.6	11.8	0	-37.19	-31.85	-27	-4.85	-	-	163	102	H
			7.125	-32.75	Pk	35.6	11.8	0	-37.18	-22.53	-	-	-7	-15.53	179	211	V
			7.125	-47.83	RMS	35.6	11.8	0	-37.18	-37.61	-27	-10.61	-	-	179	211	V
			7.128568	-42.5	RMS	35.6	11.8	0	-37.2	-32.3	-27	-5.3	-	-	179	211	V
			7.129034	-26.6	Pk	35.6	11.8	0	-37.2	-16.4	-	-	-7	-9.4	179	211	V
			* 7.448313	-48.12	Pk	35.6	11.8	0	-35.73	-36.45	-	-	-21.2	-15.25	267	128	H
			* 7.259857	-60.28	RMS	35.6	11.8	0	-35.31	-48.19	-41.2	-6.99	-	-	267	128	H
EHT80 (SU Mode)	7025	6 + 5	7.125	-38.39	Pk	35.7	11.8	0	-35.7	-26.59	-	-	-7	-19.59	267	128	H
			7.125	-55.66	RMS	35.7	11.8	0	-35.7	-43.86	-27	-16.86	-	-	267	128	H
			* 7.495291	-48.09	Pk	35.6	11.8	0	-35.7	-36.39	-	-	-21.2	-15.19	236	107	V
			* 7.263279	-60.8	RMS	35.6	11.8	0	-35.17	-48.57	-41.2	-7.37	-	-	236	107	V
			7.125	-42.66	Pk	35.7	11.8	0	-35.7	-30.86	-	-	-7	-23.86	236	107	V
			7.125	-58.47	RMS	35.7	11.8	0	-35.7	-46.67	-27	-19.67	-	-	236	107	V
			* 7.524458	-60.37	RMS	35.7	11.8	0.14	-35.5	-48.23	-41.2	-7.03	-	-	147	109	H
			7.125	-39.33	Pk	35.7	11.8	0	-35.7	-27.53	-	-	-7	-20.53	147	109	H
			7.125	-54.69	RMS	35.7	11.8	0.14	-35.7	-42.75	-27	-15.75	-	-	147	109	H
EHT160 (SU Mode)	6985	6 + 5	7.139223	-33.51	Pk	35.6	11.8	0	-35.6	-21.71	-	-	-7	-14.71	147	109	H
			7.125	-37.57	Pk	35.7	11.8	0	-35.7	-25.77	-	-	-7	-18.77	204	187	V
			7.125	-52.06	RMS	35.7	11.8	0.14	-35.7	-40.12	-27	-13.12	-	-	204	187	V
			7.132612	-45.18	RMS	35.6	11.8	0.14	-35.5	-33.14	-27	-6.14	-	-	204	187	V
			7.138912	-30.3	Pk	35.6	11.8	0	-35.6	-18.5	-	-	-7	-11.5	204	187	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

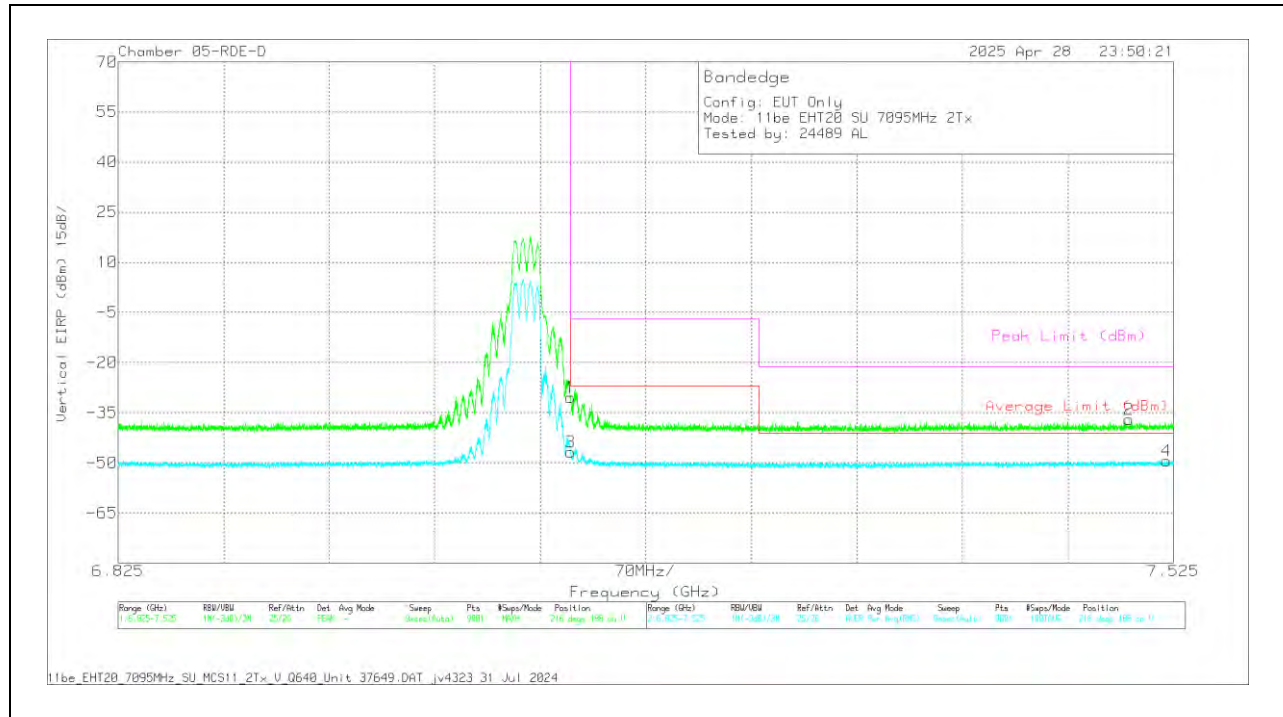
2TX Antenna 6 + Antenna 5 OFDMA MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-41.86	Pk	35.6	11.8	0	-37.18	-31.64	-	-	-7	-24.64	267	134	H
2	7.491791	-46.14	Pk	35.6	11.8	0	-37.5	-36.24	-	-	-21.2	-15.04	267	134	H
3	7.125	-58.19	RMS	35.6	11.8	0	-37.18	-47.97	-27	-20.97	-	-	267	134	H
4	7.514035	-59.33	RMS	35.6	11.8	0	-37.42	-49.35	-41.2	-8.15	-	-	267	134	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-40.69	Pk	35.6	11.8	0	-37.18	-30.47	-	-	-7	-23.47	216	188	V
2	7.495369	-47.03	Pk	35.6	11.8	0	-37.38	-37.01	-	-	-21.2	-15.81	216	188	V
3	7.125	-56.99	RMS	35.6	11.8	0	-37.18	-46.77	-27	-19.77	-	-	216	188	V
4	7.520335	-59.34	RMS	35.6	11.8	0	-37.41	-49.35	-41.2	-8.15	-	-	216	188	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

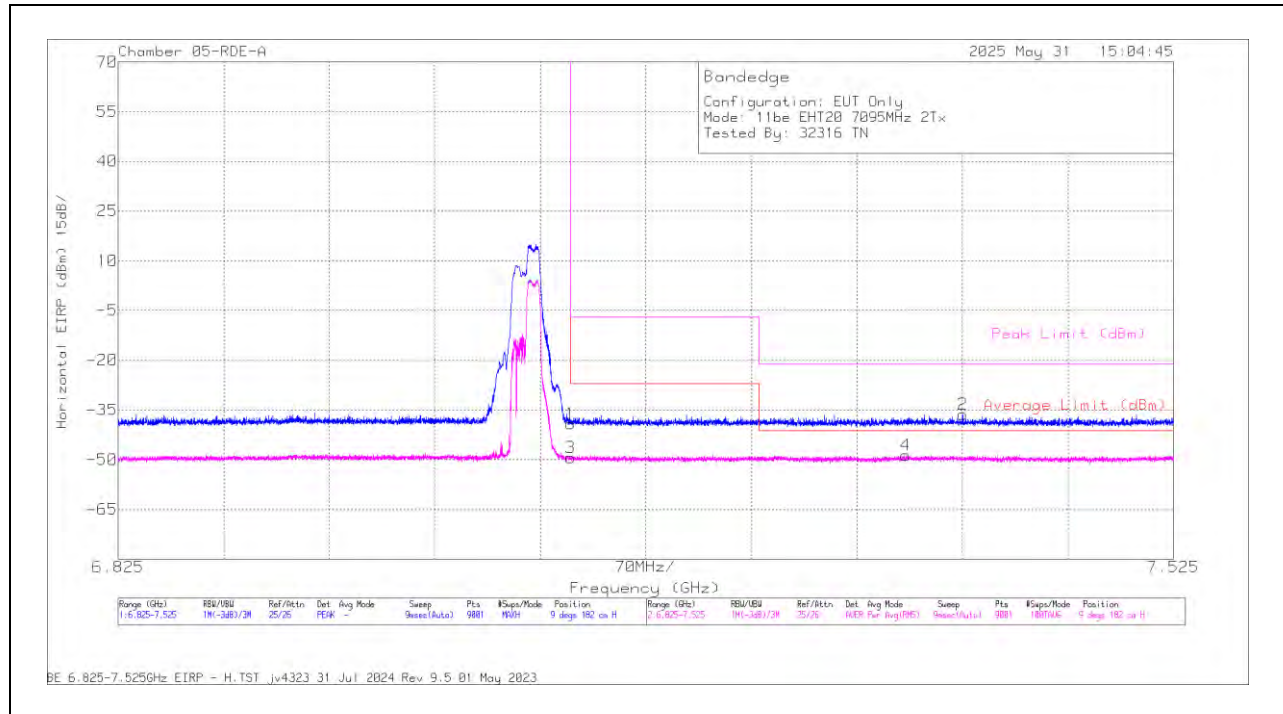
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6 + 5	* 7.385157	-48.14	Pk	35.6	11.8	0	-35.6	-36.34	-	-	-21.2	-15.14	9	182	H
			* 7.34759	-60.59	RMS	35.6	11.8	0	-35.4	-48.59	-41.2	-7.39	-	-	9	182	H
			7.125	-50.91	Pk	35.7	11.8	0	-35.7	-39.11	-	-	-7	-32.11	9	182	H
			7.125	-61.25	RMS	35.7	11.8	0	-35.7	-49.45	-27	-22.45	-	-	9	182	H
			* 7.393402	-47.51	Pk	35.6	11.8	0	-35.5	-35.61	-	-	-21.2	-14.41	339	347	V
			* 7.347824	-60.63	RMS	35.6	11.8	0	-35.4	-48.63	-41.2	-7.43	-	-	339	347	V
			7.125	-50.03	Pk	35.7	11.8	0	-35.7	-38.23	-	-	-7	-31.23	339	347	V
EHT40 (RU 106 / Index 56)	7085	6 + 5	7.125	-61.58	RMS	35.7	11.8	0	-35.7	-49.78	-27	-22.78	-	-	339	347	V
			7.125	-49.04	Pk	35.7	11.8	0	-37.13	-38.67	-	-	-7	-31.67	145	188	H
			7.470246	-47.46	Pk	35.6	11.8	0	-37.1	-37.16	-	-	-21.2	-15.96	145	188	H
			7.125	-60.98	RMS	35.7	11.8	0	-37.13	-50.61	-27	-23.61	-	-	145	188	H
			7.524146	-59.87	RMS	35.6	11.8	0	-36.98	-49.45	-41.2	-8.25	-	-	145	188	H
			7.125	-49.23	Pk	35.7	11.8	0	-37.13	-38.86	-	-	-7	-31.86	126	122	V
			7.516913	-48.11	Pk	35.6	11.8	0	-36.96	-37.67	-	-	-21.2	-16.47	126	122	V
EHT80 (MRU 106+26 / Index 89)	7025	6 + 5	7.125	-60.85	RMS	35.7	11.8	0	-37.13	-50.48	-27	-23.48	-	-	126	122	V
			7.522202	-59.87	RMS	35.6	11.8	0	-36.97	-49.44	-41.2	-8.24	-	-	126	122	V
			* 7.33989	-48.34	Pk	35.6	11.8	0	-35.6	-36.54	-	-	-21.2	-15.34	260	149	H
			* 7.390291	-60.2	RMS	35.6	11.8	0	-35.5	-48.3	-41.2	-7.1	-	-	260	149	H
			7.125	-51.59	Pk	35.7	11.8	0	-35.7	-39.79	-	-	-7	-32.79	260	149	H
			7.125	-62.26	RMS	35.7	11.8	0	-35.7	-50.46	-27	-23.46	-	-	260	149	H
			* 7.346813	-48.87	Pk	35.6	11.8	0	-35.4	-36.87	-	-	-21.2	-15.67	216	177	V
EHT160 (RU 52 / Index S52)	6985	6 + 5	* 7.26569	-60.72	RMS	35.6	11.8	0	-35.17	-48.49	-41.2	-7.29	-	-	216	177	V
			7.125	-50.09	Pk	35.7	11.8	0	-35.7	-38.29	-	-	-7	-31.29	216	177	V
			7.125	-61.52	RMS	35.7	11.8	0	-35.7	-49.72	-27	-22.72	-	-	216	177	V
			7.125	-50.14	Pk	35.7	11.8	0	-37.13	-39.77	-	-	-7	-32.77	151	105	H
			7.270046	-48.18	Pk	35.7	11.8	0	-36.8	-37.48	-	-	-21.2	-16.28	151	105	H
			7.125	-60.8	RMS	35.7	11.8	0	-37.13	-50.43	-27	-23.43	-	-	151	105	H
			7.512635	-59.75	RMS	35.6	11.8	0	-37.01	-49.36	-41.2	-8.16	-	-	151	105	H
			7.125	-49.88	Pk	35.7	11.8	0	-37.13	-39.51	-	-	-7	-32.51	137	104	V
			7.429335	-47.29	Pk	35.6	11.8	0	-37.17	-37.06	-	-	-21.2	-15.86	137	104	V
			7.125	-60.53	RMS	35.7	11.8	0	-37.13	-50.16	-27	-23.16	-	-	137	104	V
			7.516369	-59.87	RMS	35.6	11.8	0	-36.95	-49.42	-41.2	-8.22	-	-	137	104	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

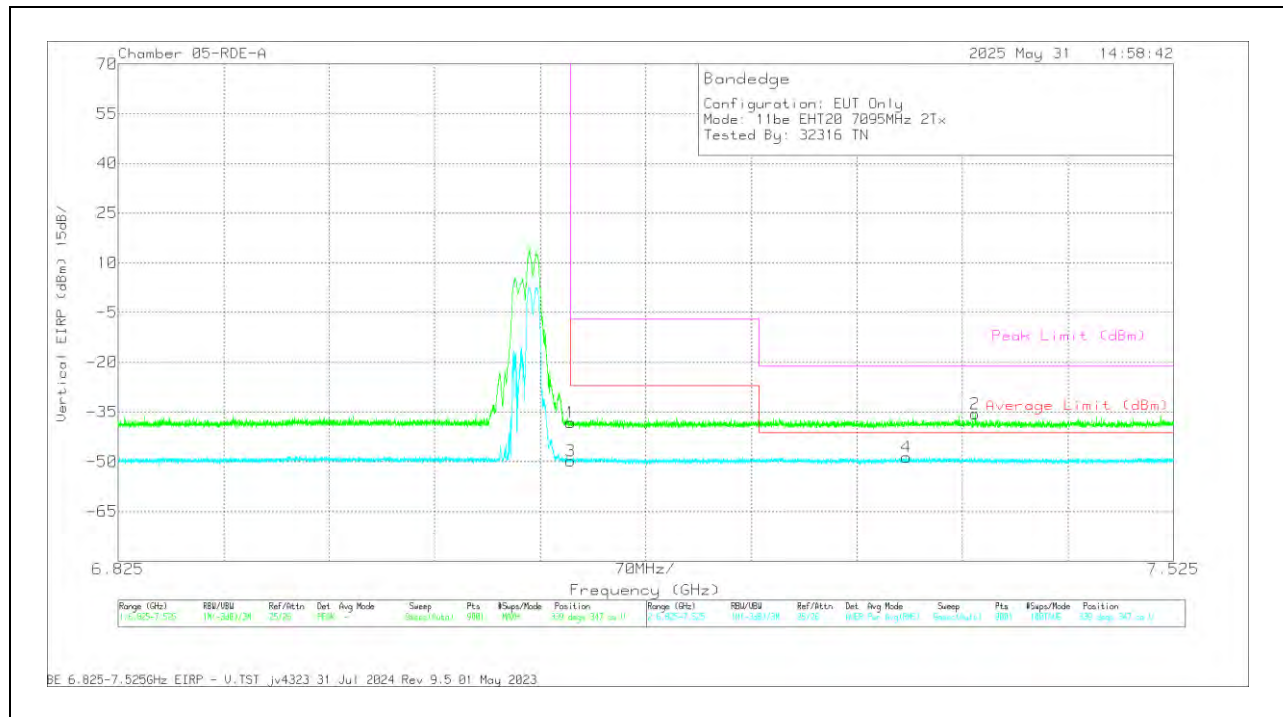
2TX Antenna 6 + Antenna 5 OFDMA MODE: 106-Tone, RU Index 54**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80403 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.38515	-48.14	Pk	35.6	11.8	0	-35.6	-36.34	-	-	-21.2	-15.14	9	182	H
4	* 7.34759	-60.59	RMS	35.6	11.8	0	-35.4	-48.59	-41.2	-7.39	-	-	9	182	H
1	7.125	-50.91	Pk	35.7	11.8	0	-35.7	-39.11	-	-	-7	-32.11	9	182	H
3	7.125	-61.25	RMS	35.7	11.8	0	-35.7	-49.45	-27	-22.45	-	-	9	182	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80403 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.39340	-47.51	Pk	35.6	11.8	0	-35.5	-35.61	-	-	-21.2	-14.41	339	347	V
4	* 7.34782	-60.63	RMS	35.6	11.8	0	-35.4	-48.63	-41.2	-7.43	-	-	339	347	V
1	7.125	-50.03	Pk	35.7	11.8	0	-35.7	-38.23	-	-	-7	-31.23	339	347	V
3	7.125	-61.58	RMS	35.7	11.8	0	-35.7	-49.78	-27	-22.78	-	-	339	347	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

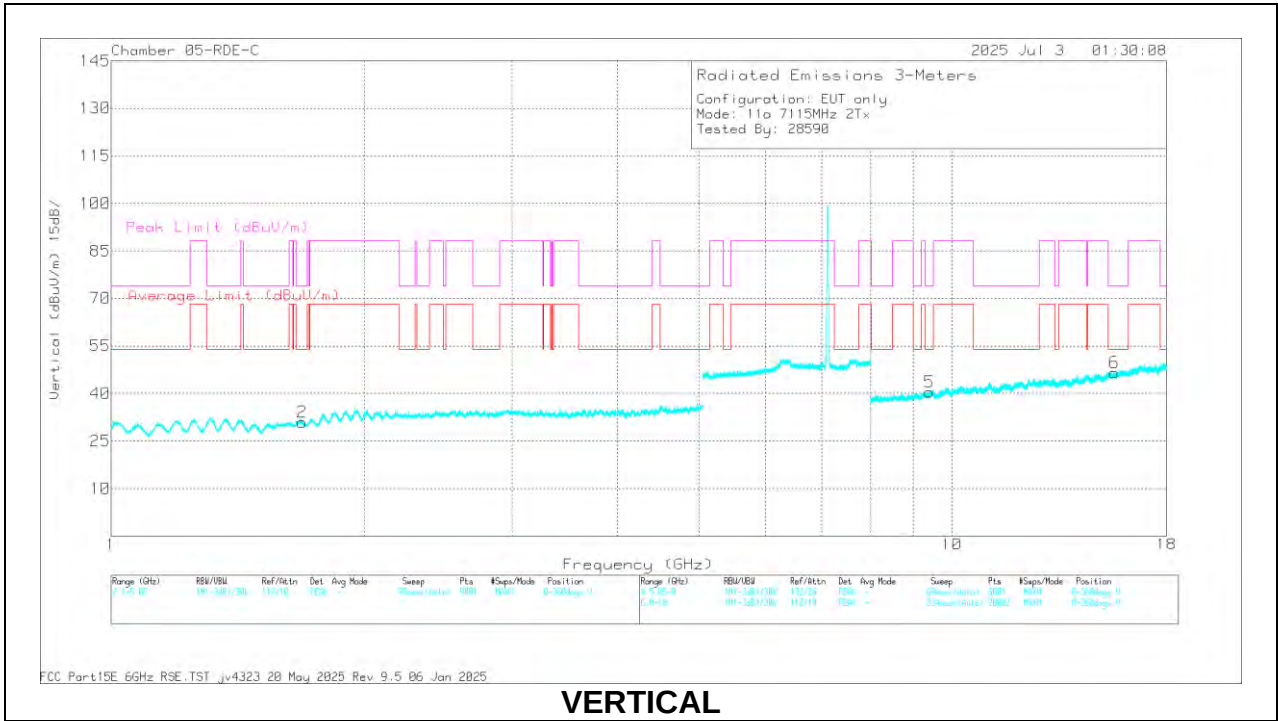
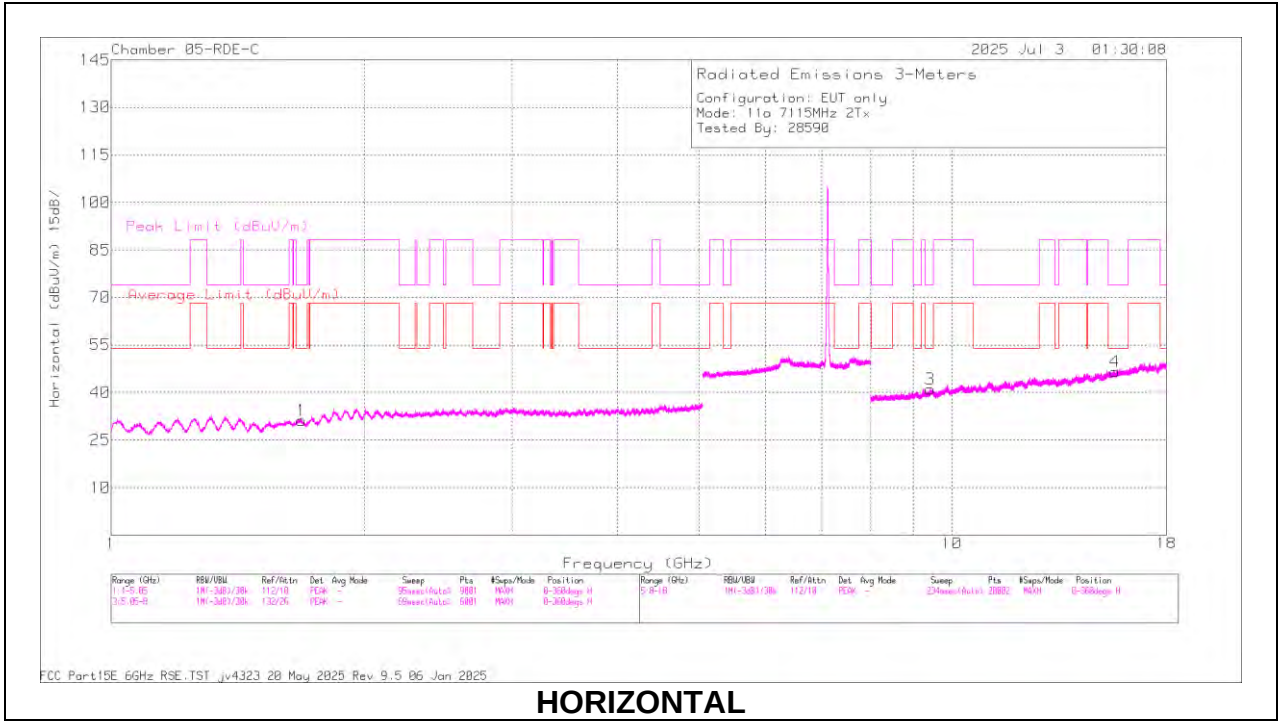
UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 1.680799	61.6	PK-U	29.1	0	-48.77	41.93	-	-	74	-32.07	0	200	H
			* 1.67324	49.9	ADR	29	0	-48.87	30.03	54	-23.97	-	-	0	200	H
			* 1.681904	61.7	PK-U	29.1	0	-48.81	41.99	-	-	74	-32.01	0	101	V
			* 1.676558	49.74	ADR	29	0	-48.8	29.94	54	-24.06	-	-	0	101	V
			* 9.443467	58.62	PK-U	36.6	0	-44.96	50.26	-	-	74	-23.74	0	101	H
			* 9.439071	46.97	ADR	36.6	0	-44.78	38.79	54	-15.21	-	-	0	101	H
			* 15.628595	59.22	PK-U	40.4	0	-43.43	56.19	-	-	74	-17.81	0	199	H
			* 15.633767	47.1	ADR	40.4	0	-43.55	43.95	54	-10.05	-	-	0	199	H
			* 9.427896	58.92	PK-U	36.6	0	-44.46	51.06	-	-	74	-22.94	0	199	V
			* 9.422764	46.92	ADR	36.6	0	-44.74	38.78	54	-15.22	-	-	0	199	V
			* 15.634609	58.79	PK-U	40.4	0	-43.57	55.62	-	-	74	-18.38	0	199	V
			* 15.623298	47.16	ADR	40.4	0	-43.44	44.12	54	-9.88	-	-	0	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.680799	61.6	PK-U	29.1	0	-48.77	41.93	-	-	74	-32.07	0	200	H
	* 1.67324	49.9	ADR	29	0	-48.87	30.03	54	-23.97	-	-	0	200	H
2	* 1.681904	61.7	PK-U	29.1	0	-48.81	41.99	-	-	74	-32.01	0	101	V
	* 1.676558	49.74	ADR	29	0	-48.8	29.94	54	-24.06	-	-	0	101	V
3	* 9.443467	58.62	PK-U	36.6	0	-44.96	50.26	-	-	74	-23.74	0	101	H
	* 9.439071	46.97	ADR	36.6	0	-44.78	38.79	54	-15.21	-	-	0	101	H
4	* 15.62859	59.22	PK-U	40.4	0	-43.43	56.19	-	-	74	-17.81	0	199	H
	* 15.63376	47.1	ADR	40.4	0	-43.55	43.95	54	-10.05	-	-	0	199	H
5	* 9.427896	58.92	PK-U	36.6	0	-44.46	51.06	-	-	74	-22.94	0	199	V
	* 9.422764	46.92	ADR	36.6	0	-44.74	38.78	54	-15.22	-	-	0	199	V
6	* 15.63460	58.79	PK-U	40.4	0	-43.57	55.62	-	-	74	-18.38	0	199	V
	* 15.62329	47.16	ADR	40.4	0	-43.44	44.12	54	-9.88	-	-	0	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

20MHz

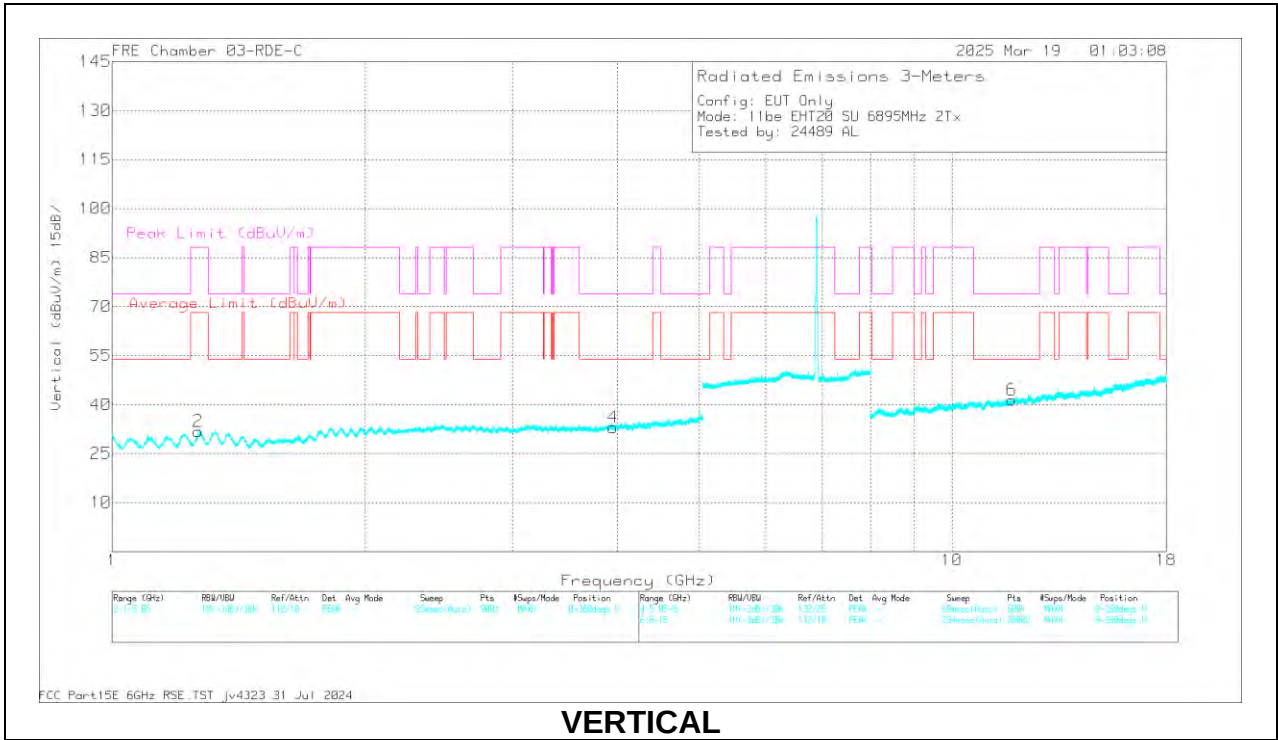
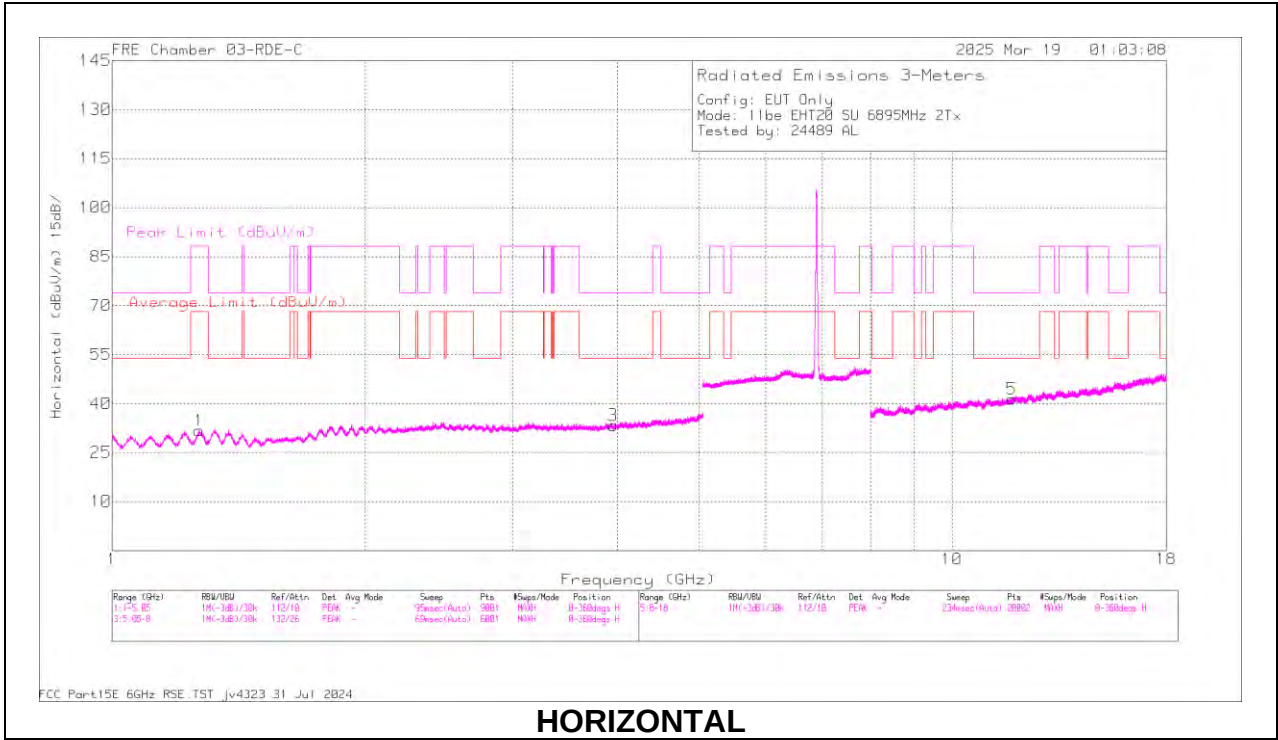
UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/FI tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6895	6 + 5	* 1.270836	60.58	PK-U	29.3	0	-47.9	41.98	-	-	88.2	-46.22	0	199	H
			* 1.26955	48.51	ADR	29.3	0	-47.85	29.96	68.2	-38.24	-	-	0	199	H
			* 3.95169	55.52	PK-U	33.4	0	-45.73	43.19	-	-	74	-30.81	0	199	H
			* 3.949479	43.88	ADR	33.4	0	-45.75	31.53	54	-22.47	-	-	0	199	H
			* 1.26771	59.77	PK-U	29.3	0	-47.9	41.17	-	-	88.2	-47.03	0	101	V
			* 1.26765	48.31	ADR	29.3	0	-47.9	29.71	68.2	-38.49	-	-	0	101	V
			* 3.952794	55.45	PK-U	33.4	0	-45.7	43.15	-	-	74	-30.85	0	198	V
			* 3.949575	43.95	ADR	33.4	0	-45.74	31.61	54	-22.39	-	-	0	198	V
			* 11.784668	55.7	PK-U	38.6	0	-42.8	51.5	-	-	74	-22.5	0	199	H
			* 11.782081	43.83	ADR	38.6	0	-42.8	39.63	54	-14.37	-	-	0	199	H
			* 11.78204	55.86	PK-U	38.6	0	-42.8	51.66	-	-	74	-22.34	0	199	V
			* 11.782033	44.04	ADR	38.6	0	-42.8	39.84	54	-14.16	-	-	0	199	V
	6995	6 + 5	* 1.269967	60.55	PK-U	29.3	0	-47.9	41.95	-	-	88.2	-46.25	2	101	H
			* 1.271599	48.6	ADR	29.3	0	-47.9	30	68.2	-38.2	-	-	2	101	H
			* 3.887795	56.21	PK-U	33.2	0	-45.9	43.51	-	-	74	-30.49	2	199	H
			* 3.887787	44.49	ADR	33.2	0	-45.9	31.79	54	-22.21	-	-	2	199	H
			* 1.270732	60.18	PK-U	29.3	0	-47.9	41.58	-	-	88.2	-46.62	2	101	V
			* 1.270662	48.57	ADR	29.3	0	-47.9	29.97	68.2	-38.23	-	-	2	101	V
			* 3.890435	55.97	PK-U	33.2	0	-45.9	43.27	-	-	74	-30.73	2	200	V
			* 3.88719	44.55	ADR	33.2	0	-45.9	31.85	54	-22.15	-	-	2	200	V
			* 11.624866	55.73	PK-U	38.4	0	-43.4	50.73	-	-	74	-23.27	2	101	H
			* 11.622549	44.14	ADR	38.4	0	-43.3	39.24	54	-14.76	-	-	2	101	H
			* 11.618963	56.89	PK-U	38.4	0	-43.2	52.09	-	-	74	-21.91	2	200	V
			* 11.622705	44.39	ADR	38.4	0	-43.3	39.49	54	-14.51	-	-	2	200	V
	7095	6 + 5	* 1.220933	60.28	PK-U	29	0	-48.01	41.27	-	-	74	-32.73	2	198	H
			* 1.221979	48.58	ADR	29	0	-48	29.58	54	-24.42	-	-	2	198	H
			* 3.975498	56.07	PK-U	33.4	0	-45.8	43.67	-	-	74	-30.33	2	198	H
			* 3.978524	44.5	ADR	33.4	0	-45.8	32.1	54	-21.9	-	-	2	198	H
			* 1.223096	60.28	PK-U	29	0	-48	41.28	-	-	74	-32.72	2	101	V
			* 1.222828	48.53	ADR	29	0	-48	29.53	54	-24.47	-	-	2	101	V
			* 3.976234	56	PK-U	33.4	0	-45.8	43.6	-	-	74	-30.4	2	199	V
			* 3.97936	44.51	ADR	33.4	0	-45.8	32.11	54	-21.89	-	-	2	199	V
			* 11.681636	55.33	PK-U	38.5	0	-43.5	50.33	-	-	74	-23.67	2	199	H
			* 11.680759	44.27	ADR	38.5	0	-43.5	39.27	54	-14.73	-	-	2	199	H
			* 11.681552	56.22	PK-U	38.5	0	-43.5	51.22	-	-	74	-22.78	2	101	V
			* 11.680916	44.17	ADR	38.5	0	-43.5	39.17	54	-14.83	-	-	2	101	V
11be (106T Mode / Highest PSD)	6895	6 + 5	* 9.009189	53.68	PK-U	35.9	0	-42.22	47.36	-	-	74	-26.64	360	101	H
			* 9.011695	41.85	ADR	35.9	0	-42.3	35.45	54	-18.55	-	-	360	101	H
			13.792879	53.89	PK-U	39	0	-41.39	51.5	-	-	88.2	-36.7	360	101	H
			13.79129	42.42	ADR	39	0	-41.3	40.12	68.2	-28.08	-	-	360	101	H
			* 17.996961	55.42	PK-U	41.1	0	-40.2	56.32	-	-	74	-17.68	360	200	H
			* 17.998663	43.93	ADR	41.1	0	-40.2	44.83	54	-9.17	-	-	360	200	H
			* 9.013825	53.56	PK-U	35.9	0	-42.3	47.16	-	-	74	-26.84	360	200	V
			* 9.011842	41.91	ADR	35.9	0	-42.3	35.51	54	-18.49	-	-	360	200	V
			13.79174	53.48	PK-U	39	0	-41.3	51.18	-	-	88.2	-37.02	360	101	V
			13.794179	41.98	ADR	39	0	-41.4	39.58	68.2	-28.62	-	-	360	101	V
			* 17.99619	55.35	PK-U	41.1	0	-40.2	56.25	-	-	74	-17.75	360	101	V
			* 17.998813	43.92	ADR	41.1	0	-40.2	44.82	54	-9.18	-	-	360	101	V
	6995	6 + 5	* 9.011994	54.14	PK-U	35.9	0	-42.3	47.74	-	-	74	-26.26	360	200	H
			* 9.01316	42.03	ADR	35.9	0	-42.3	35.63	54	-18.37	-	-	360	200	H
			14.010684	55.05	PK-U	39	0	-41.5	52.55	-	-	88.2	-35.65	360	101	H
			14.009127	43.11	ADR	39	0	-41.5	40.61	68.2	-27.59	-	-	360	101	H
			* 17.997103	55.29	PK-U	41.1	0	-40.2	56.19	-	-	74	-17.81	360	101	H
			* 17.994766	43.79	ADR	41.1	0	-40.2	44.69	54	-9.31	-	-	360	101	H
			* 9.012877	53.24	PK-U	35.9	0	-42.3	46.84	-	-	74	-27.16	360	200	V
			* 9.014338	42.03	ADR	35.9	0	-42.3	35.63	54	-18.37	-	-	360	200	V
			14.007939	55	PK-U	39	0	-41.5	52.5	-	-	88.2	-35.7	360	200	V
			14.00774	43.18	ADR	39	0	-41.5	40.68	68.2	-27.52	-	-	360	200	V
			* 17.995845	55	PK-U	41.1	0	-40.2	55.9	-	-	74	-18.1	360	101	V
			* 17.99679	43.69	ADR	41.1	0	-40.2	44.59	54	-9.41	-	-	360	101	V
	7095	6 + 5	* 9.010676	53.45	PK-U	35.9	0	-42.3	47.05	-	-	74	-26.95	0	101	H
			* 9.0103	42.06	ADR	35.9	0	-42.3	35.66	54	-18.34	-	-	0	101	H
			14.178511	54.99	PK-U	39.1	0	-41.5	52.59	-	-	88.2	-35.61	0	101	H
			14.179305	43.28	ADR	39.1	0	-41.47	40.91	68.2	-27.29	-	-	0	101	H
			* 17.999786	55.15	PK-U	41.1	0	-40.2	56.05	-	-	74	-17.95	0	101	H
			* 17.998911	43.75	ADR	41.1	0	-40.2	44.65	54	-9.35	-	-	0	101	H
			* 9.009721	53.56	PK-U	35.9	0	-42.27	47.19	-	-	74	-26.81	0	200	V
			* 9.009397	41.97	ADR	35.9	0	-42.24	35.63	54	-18.37	-	-	0	200	V
			14.179989	54.44	PK-U	39.1	0	-41.4	52.14	-	-	88.2	-36.06	0	200	V
			14.17746	42.85	ADR	39.1	0	-41.5	40.45	68.2	-27.75	-	-	0	200	V
			* 17.996611	55.2	PK-U	41.1	0	-40.2	56.1	-	-	74	-17.9	0	101	V
			* 17.996851	43.92	ADR	41.1	0	-40.2	44.82	54	-9.18	-	-	0	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6895MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.270836	60.58	PK-U	29.3	0	-47.9	41.98	-	-	88.2	-46.22	0	199	H
	* 1.26955	48.51	ADR	29.3	0	-47.85	29.96	68.2	-38.24	-	-	0	199	H
3	* 3.95169	55.52	PK-U	33.4	0	-45.73	43.19	-	-	74	-30.81	0	199	H
	* 3.949479	43.88	ADR	33.4	0	-45.75	31.53	54	-22.47	-	-	0	199	H
2	* 1.26771	59.77	PK-U	29.3	0	-47.9	41.17	-	-	88.2	-47.03	0	101	V
	* 1.26765	48.31	ADR	29.3	0	-47.9	29.71	68.2	-38.49	-	-	0	101	V
4	* 3.952794	55.45	PK-U	33.4	0	-45.7	43.15	-	-	74	-30.85	0	198	V
	* 3.949575	43.95	ADR	33.4	0	-45.74	31.61	54	-22.39	-	-	0	198	V
5	* 11.784668	55.7	PK-U	38.6	0	-42.8	51.5	-	-	74	-22.5	0	199	H
	* 11.782081	43.83	ADR	38.6	0	-42.8	39.63	54	-14.37	-	-	0	199	H
6	* 11.78204	55.86	PK-U	38.6	0	-42.8	51.66	-	-	74	-22.34	0	199	V
	* 11.782033	44.04	ADR	38.6	0	-42.8	39.84	54	-14.16	-	-	0	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

40MHz

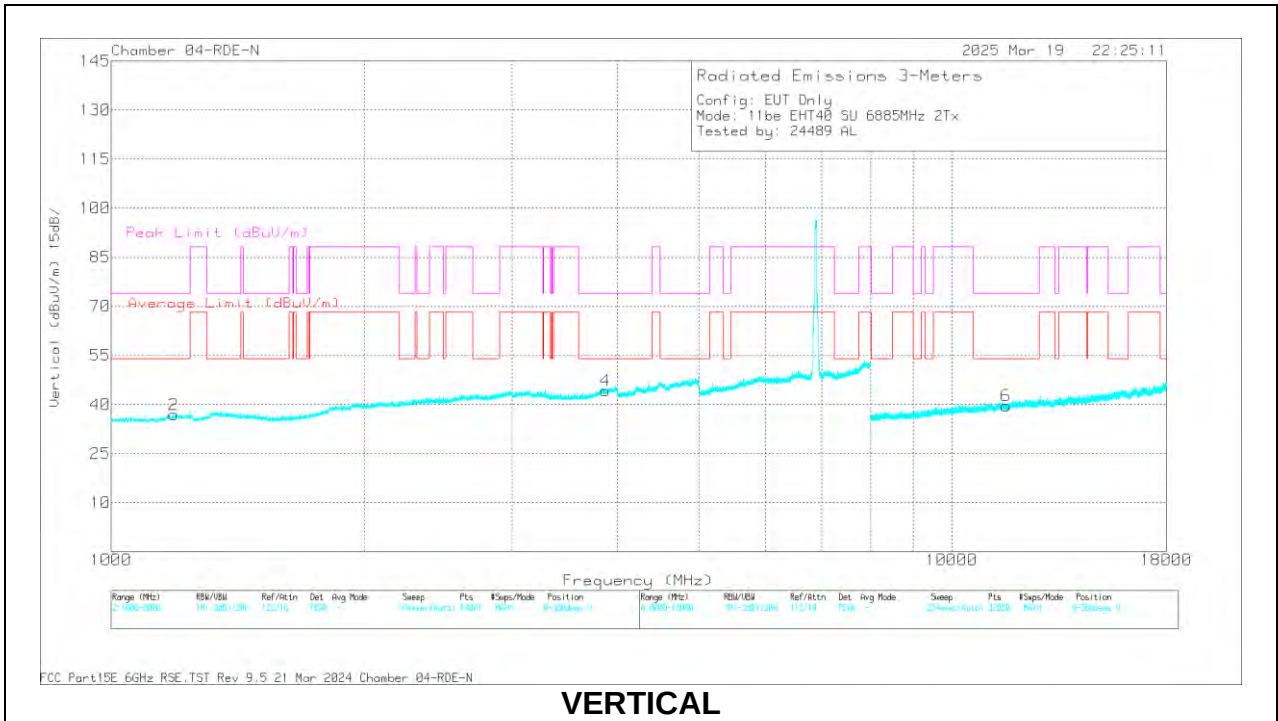
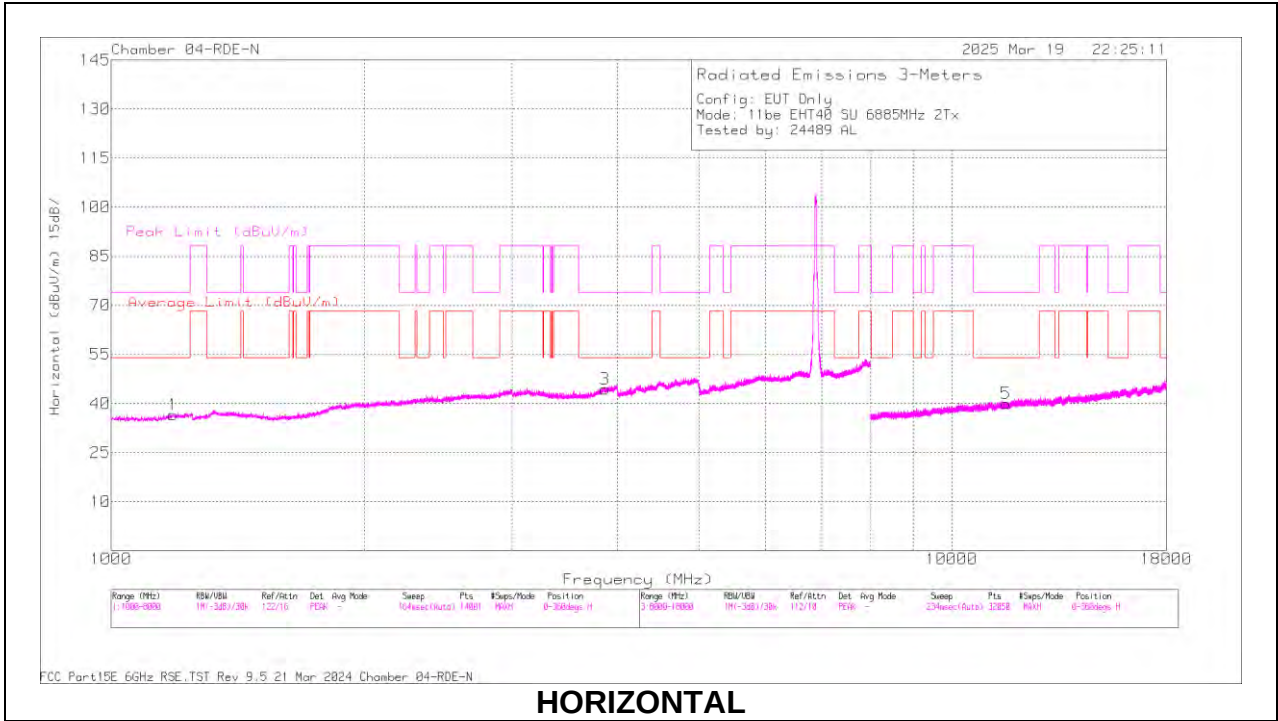
UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	DCCF (dB)	Amp/CbI/F tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6885 (Straddle)	6 + 5	* 1170.901	46.43	PK-U	28.2	0	-28.11	46.52	-	-	74	-27.48	360	100	H
			* 1170.898	34.44	ADR	28.2	0	-28.11	34.53	54	-19.47	-	-	360	100	H
			* 3862.8	45.91	PK-U	33.8	0	-25.79	53.92	-	-	74	-20.08	360	100	H
			* 3871.697	34.35	ADR	33.8	0	-25.83	42.32	54	-11.68	-	-	360	100	H
			* 1179.189	46.55	PK-U	28.3	0	-28.14	46.71	-	-	74	-27.29	360	201	V
			* 1184.217	34.27	ADR	28.4	0	-28.06	34.61	54	-19.39	-	-	360	201	V
			* 3865.757	46.42	PK-U	33.8	0	-25.8	54.42	-	-	74	-19.58	360	200	V
			* 3869.017	34.31	ADR	33.8	0	-25.82	42.29	54	-11.71	-	-	360	200	V
			* 11617.168	56.7	PK-U	38.5	0	-45.21	49.99	-	-	74	-24.01	360	100	H
			* 11603.719	44.94	ADR	38.4	0	-45.37	37.97	54	-16.03	-	-	360	100	H
			* 11617.989	56.51	PK-U	38.5	0	-45.14	49.87	-	-	74	-24.13	360	201	V
			* 11597.881	45.11	ADR	38.4	0	-45.4	38.11	54	-15.89	-	-	360	201	V
	6965	6 + 5	* 1245.659	45.61	PK-U	29	0	-28.02	46.59	-	-	88.2	-41.61	360	100	H
			* 1210.13	34.13	ADR	28.7	0	-28.17	34.66	54	-19.34	-	-	360	100	H
			* 3957.776	45.66	PK-U	33.9	0	-25.8	53.76	-	-	74	-20.24	360	100	H
			* 3950.928	34.08	ADR	33.9	0	-25.86	42.12	54	-11.88	-	-	360	100	H
			* 1214.647	45.96	PK-U	28.7	0	-28.13	46.53	-	-	74	-27.47	360	201	V
			* 1230.066	34.16	ADR	28.9	0	-28.11	34.95	54	-19.05	-	-	360	201	V
			* 3944.065	45.73	PK-U	33.9	0	-25.75	53.88	-	-	74	-20.12	360	200	V
			* 3945.802	34.2	ADR	33.9	0	-25.78	42.32	54	-11.68	-	-	360	200	V
			* 11643.224	56.67	PK-U	38.5	0	-45.09	50.08	-	-	74	-23.92	360	100	H
			* 11621.315	45.13	ADR	38.5	0	-45.13	38.5	54	-15.5	-	-	360	100	H
			* 11656.917	56.83	PK-U	38.5	0	-45.34	49.99	-	-	74	-24.01	360	201	V
			* 11644.736	45.23	ADR	38.5	0	-45.16	38.57	54	-15.43	-	-	360	201	V
	7085	6 + 5	* 1213.931	46.72	PK-U	28.7	0	-28.12	47.3	-	-	74	-26.7	360	100	H
			* 1186.859	34.6	ADR	28.4	0	-28.05	34.95	54	-19.05	-	-	360	100	H
			* 3847.369	46.26	PK-U	33.8	0	-25.67	54.39	-	-	74	-19.61	360	100	H
			* 3857.214	34.33	ADR	33.8	0	-25.7	42.43	54	-11.57	-	-	360	100	H
			* 1202.697	46.25	PK-U	28.6	0	-28.08	46.77	-	-	74	-27.23	360	201	V
			* 1184.37	34.44	ADR	28.4	0	-28.05	34.79	54	-19.21	-	-	360	201	V
			* 3877.428	46.35	PK-U	33.8	0	-25.91	54.24	-	-	74	-19.76	360	200	V
			* 3850.37	34.28	ADR	33.8	0	-25.67	42.41	54	-11.59	-	-	360	200	V
			* 11483.077	56.5	PK-U	38.3	0	-44.72	50.08	-	-	74	-23.92	360	100	H
			* 11462.546	44.77	ADR	38.3	0	-44.83	38.24	54	-15.76	-	-	360	100	H
			* 11483.736	56.31	PK-U	38.3	0	-44.76	49.85	-	-	74	-24.15	360	201	V
			* 11482.168	44.92	ADR	38.3	0	-44.74	38.48	54	-15.52	-	-	360	201	V
11be (106T Mode / Highest PSD)	6885 (Straddle)	6 + 5	* 1.303517	62.14	PK-U	29.4	0	-50.52	41.02	-	-	74	-32.98	360	101	H
			* 1.304009	50.96	ADR	29.4	0	-50.53	29.83	54	-24.17	-	-	360	101	H
			* 3.915804	57.98	PK-U	33.5	0	-47.68	43.8	-	-	74	-30.2	360	101	H
			* 3.916243	46.24	ADR	33.5	0	-47.68	32.06	54	-21.94	-	-	360	101	H
			* 1.304561	62.46	PK-U	29.4	0	-50.55	41.31	-	-	74	-32.69	360	101	V
			* 1.302427	51.08	ADR	29.4	0	-50.52	29.96	54	-24.04	-	-	360	101	V
			* 3.917665	57.86	PK-U	33.5	0	-47.66	43.7	-	-	74	-30.3	360	101	V
			* 3.919139	46.29	ADR	33.5	0	-47.61	32.18	54	-21.82	-	-	360	101	V
			* 11.61772	55.82	PK-U	38.3	0	-43.87	50.25	-	-	74	-23.75	360	200	H
			* 11.616061	44.34	ADR	38.3	0	-43.93	38.71	54	-15.29	-	-	360	200	H
			* 11.615936	56	PK-U	38.3	0	-43.92	50.38	-	-	74	-23.62	360	101	V
			* 11.61522	44.34	ADR	38.3	0	-43.87	38.77	54	-15.23	-	-	360	101	V
	6965	6 + 5	* 1.360343	61.72	PK-U	29	0	-50.4	40.32	-	-	74	-33.68	360	101	H
			* 1.361055	50.38	ADR	29	0	-50.37	29.01	54	-24.99	-	-	360	101	H
			* 3.985851	57.92	PK-U	33.6	0	-47.76	43.76	-	-	74	-30.24	360	200	H
			* 3.986056	46.05	ADR	33.6	0	-47.77	31.88	54	-22.12	-	-	360	200	H
			* 1.360235	62.65	PK-U	29	0	-50.41	41.24	-	-	74	-32.76	360	101	V
			* 1.358026	50.95	ADR	29	0	-50.39	29.56	54	-24.44	-	-	360	101	V
			* 3.98883	58.59	PK-U	33.6	0	-47.81	44.38	-	-	74	-29.62	360	101	V
			* 3.987845	46.22	ADR	33.6	0	-47.8	32.02	54	-21.98	-	-	360	101	V
			* 11.71625	56.07	PK-U	38.5	0	-44.42	50.15	-	-	74	-23.85	360	199	H
			* 11.716922	44.64	ADR	38.5	0	-44.46	38.68	54	-15.32	-	-	360	199	H
			* 11.713969	56.12	PK-U	38.5	0	-44.47	50.15	-	-	74	-23.85	360	101	V
			* 11.716107	44.99	ADR	38.5	0	-44.41	39.08	54	-14.92	-	-	360	101	V
	7085	6 + 5	* 1.358513	62.3	PK-U	29	0	-50.4	40.9	-	-	74	-33.1	360	101	H
			* 1.356403	50.81	ADR	29	0	-50.35	29.46	54	-24.54	-	-	360	101	H
			* 3.974338	57.89	PK-U	33.5	0	-47.79	43.6	-	-	74	-30.4	360	101	H
			* 3.976348	46.32	ADR	33.5	0	-47.76	32.06	54	-21.94	-	-	360	101	H
			* 1.357106	62.3	PK-U	29	0	-50.36	40.94	-	-	74	-33.06	360	101	V
			* 1.356902	50.7	ADR	29	0	-50.36	29.34	54	-24.66	-	-	360	101	V
			* 3.970581	58.52	PK-U	33.5	0	-47.68	44.34	-	-	74	-29.66	360	200	V
			* 3.970314	46.18	ADR	33.5	0	-47.68	32	54	-22	-	-	360	200	V
			* 11.577897	55.67	PK-U	38.2	0	-44.41	49.46	-	-	74	-24.54	360	101	H
			* 11.577297	44.52	ADR	38.2	0	-44.38	38.34	54	-15.66	-	-	360	101	H
			* 11.57665	56.06	PK-U	38.2	0	-44.36	49.9	-	-	74	-24.1	360	101	V
			* 11.574908	44.65	ADR	38.2	0	-44.25	38.6	54	-15.4	-	-	360	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6885MHz)



RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	4112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1170.901	46.43	PK-U	28.2	0	-28.11	46.52	-	-	74	-27.48	360	100	H
	* 1170.898	34.44	ADR	28.2	0	-28.11	34.53	54	-19.47	-	-	360	100	H
3	* 3862.8	45.91	PK-U	33.8	0	-25.79	53.92	-	-	74	-20.08	360	100	H
	* 3871.697	34.35	ADR	33.8	0	-25.83	42.32	54	-11.68	-	-	360	100	H
2	* 1179.189	46.55	PK-U	28.3	0	-28.14	46.71	-	-	74	-27.29	360	201	V
	* 1184.217	34.27	ADR	28.4	0	-28.06	34.61	54	-19.39	-	-	360	201	V
4	* 3865.757	46.42	PK-U	33.8	0	-25.8	54.42	-	-	74	-19.58	360	200	V
	* 3869.017	34.31	ADR	33.8	0	-25.82	42.29	54	-11.71	-	-	360	200	V
5	* 11617.168	56.7	PK-U	38.5	0	-45.21	49.99	-	-	74	-24.01	360	100	H
	* 11603.719	44.94	ADR	38.4	0	-45.37	37.97	54	-16.03	-	-	360	100	H
6	* 11617.989	56.51	PK-U	38.5	0	-45.14	49.87	-	-	74	-24.13	360	201	V
	* 11597.881	45.11	ADR	38.4	0	-45.4	38.11	54	-15.89	-	-	360	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

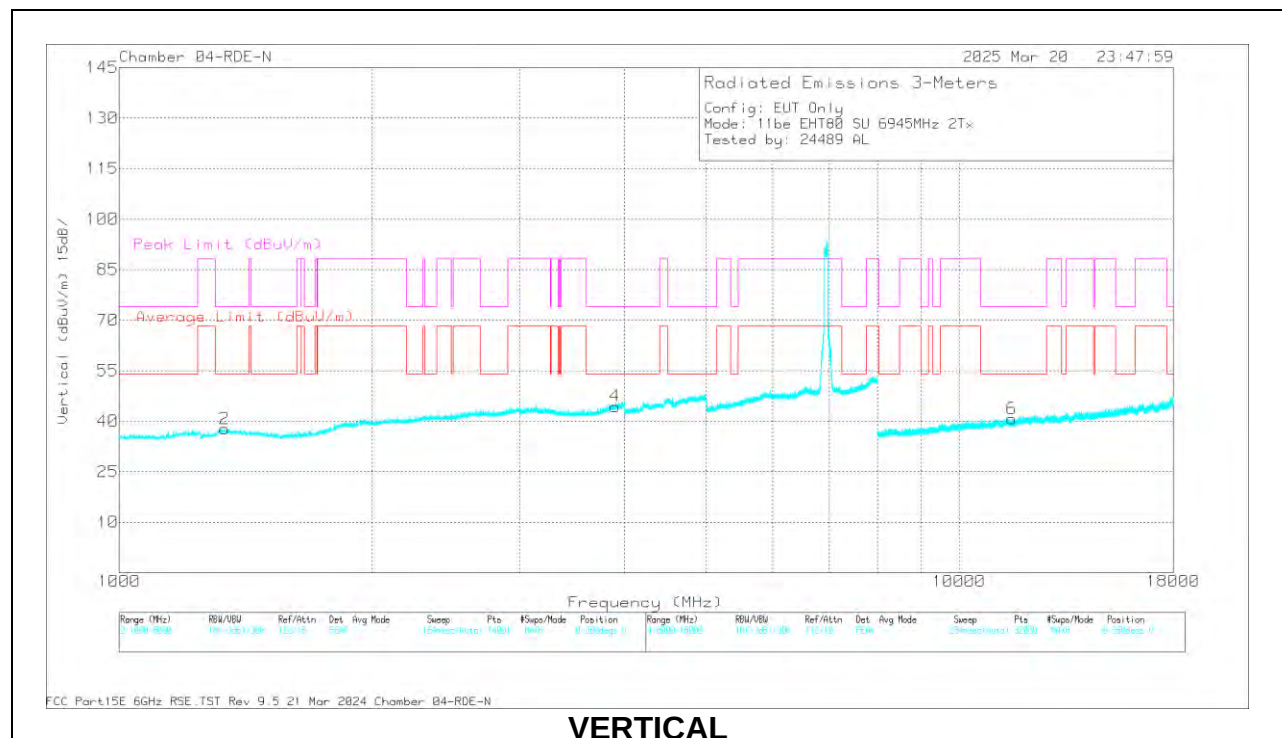
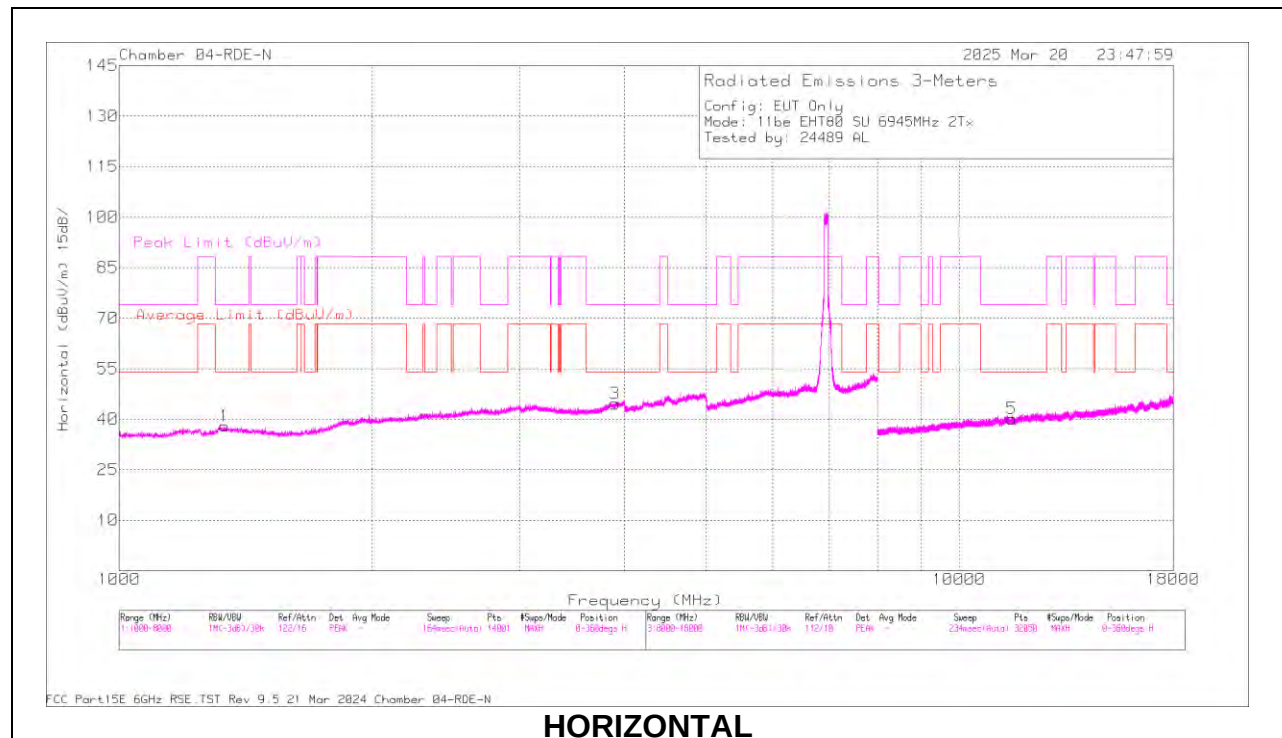
80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/FF tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6945	6 + 5	* 1344.868	45.64	PK-U	29.1	0	-28.02	46.72	-	-	74	-27.28	0	100	H
			* 1331.283	34.32	ADR	29.2	0	-27.99	35.53	54	-18.47	-	-	0	100	H
			* 3910.144	45.54	PK-U	33.9	0	-25.66	53.78	-	-	74	-20.22	0	100	H
			* 3901.588	33.9	ADR	33.9	0	-25.71	42.09	54	-11.91	-	-	0	100	H
			* 1315.421	46.32	PK-U	29.2	0	-28.04	47.48	-	-	74	-26.52	0	201	V
			* 1326.995	34.43	ADR	29.2	0	-28.03	35.6	54	-18.4	-	-	0	201	V
			* 3891.638	45.6	PK-U	33.9	0	-25.86	53.64	-	-	74	-20.36	0	200	V
			* 3914.856	33.87	ADR	33.9	0	-25.61	42.16	54	-11.84	-	-	0	200	V
			* 11575.253	56.8	PK-U	38.4	0	-45.33	49.87	-	-	74	-24.13	0	100	H
			* 11561.519	45.18	ADR	38.4	0	-45.22	38.36	54	-15.64	-	-	0	100	H
			* 11576.001	56.6	PK-U	38.4	0	-45.29	49.71	-	-	74	-24.29	0	201	V
			* 11570.318	45	ADR	38.4	0	-45.26	38.14	54	-15.86	-	-	0	201	V
	7025	6 + 5	* 1318.818	45.96	PK-U	29.2	0	-27.98	47.18	-	-	74	-26.82	0	100	H
			* 1316.409	34.23	ADR	29.2	0	-28.02	35.41	54	-18.59	-	-	0	100	H
			* 3996.039	45.87	PK-U	33.8	0	-25.64	54.03	-	-	74	-19.97	0	100	H
			* 3987.319	34.28	ADR	33.8	0	-25.58	42.5	54	-11.5	-	-	0	100	H
			* 1327.111	46.43	PK-U	29.2	0	-28.03	47.6	-	-	74	-26.4	0	201	V
			* 1315.875	34.25	ADR	29.2	0	-28.02	35.43	54	-18.57	-	-	0	201	V
			* 3990.614	46.82	PK-U	33.8	0	-25.58	55.04	-	-	74	-18.96	0	200	V
			* 3994.739	34.31	ADR	33.8	0	-25.63	42.48	54	-11.52	-	-	0	200	V
			* 11684.169	56.82	PK-U	38.5	0	-45.18	50.14	-	-	74	-23.86	0	100	H
			* 11680.967	45.09	ADR	38.5	0	-45.23	38.36	54	-15.64	-	-	0	100	H
11be (106+26T Mode / Highest PSD)	6945	6 + 5	* 11689.843	56.69	PK-U	38.5	0	-45.13	50.06	-	-	74	-23.94	0	201	V
			* 11691.962	45.17	ADR	38.5	0	-45.15	38.52	54	-15.48	-	-	0	201	V
			* 1.54942	60.74	PK-U	27.8	0	-50.09	38.45	-	-	74	-35.55	360	101	H
			* 1.549894	49.15	ADR	27.8	0	-50.08	26.87	54	-27.13	-	-	360	101	H
			* 3.914574	57.9	PK-U	33.5	0	-47.64	43.76	-	-	74	-30.24	360	200	H
			* 3.914815	46.33	ADR	33.5	0	-47.64	32.19	54	-21.81	-	-	360	200	H
			* 1.551542	60.97	PK-U	27.8	0	-50.08	38.69	-	-	74	-35.31	360	101	V
			* 1.549867	49.2	ADR	27.8	0	-50.08	26.92	54	-27.08	-	-	360	101	V
			* 3.915322	57.99	PK-U	33.5	0	-47.66	43.83	-	-	74	-30.17	360	101	V
			* 3.912221	46.28	ADR	33.5	0	-47.63	32.15	54	-21.85	-	-	360	101	V
	7025 (Straddle)	6 + 5	* 11.48008	56.31	PK-U	38.1	0	-44.39	50.02	-	-	74	-23.98	360	199	H
			* 11.478918	44.8	ADR	38.1	0	-44.48	38.42	54	-15.58	-	-	360	199	H
			* 11.479611	56.39	PK-U	38.1	0	-44.43	50.06	-	-	74	-23.94	360	101	V
			* 11.476205	44.73	ADR	38.1	0	-44.49	38.34	54	-15.66	-	-	360	101	V
			* 1.351717	61.64	PK-U	29	0	-50.34	40.3	-	-	74	-33.7	2	200	H
			* 1.352245	50.3	ADR	29	0	-50.34	28.96	54	-25.04	-	-	2	200	H
			* 3.973549	58.28	PK-U	33.5	0	-47.8	43.98	-	-	74	-30.02	2	101	H
			* 3.973144	46.24	ADR	33.5	0	-47.79	31.95	54	-22.05	-	-	2	101	H
			* 1.353842	63.45	PK-U	29	0	-50.37	42.08	-	-	74	-31.92	2	200	V
			* 1.356034	50.74	ADR	29	0	-50.35	29.39	54	-24.61	-	-	2	200	V
			* 3.976921	58.73	PK-U	33.5	0	-47.73	44.5	-	-	74	-29.5	2	101	V
			* 3.973006	46.12	ADR	33.5	0	-47.79	31.83	54	-22.17	-	-	2	101	V
			* 11.919813	55.57	PK-U	38.7	0	-43.98	50.29	-	-	74	-23.71	2	101	H
			* 11.919585	44.2	ADR	38.7	0	-44	38.9	54	-15.1	-	-	2	101	H
			* 11.917769	55.94	PK-U	38.7	0	-44.06	50.58	-	-	74	-23.42	2	101	V
			* 11.917813	44.16	ADR	38.7	0	-44.06	38.8	54	-15.2	-	-	2	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6945MHz)

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	4112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1344.868	45.64	PK-U	29.1	0	-28.02	46.72	-	-	74	-27.28	0	100	H
	* 1331.283	34.32	ADR	29.2	0	-27.99	35.53	54	-18.47	-	-	0	100	H
3	* 3910.144	45.54	PK-U	33.9	0	-25.66	53.78	-	-	74	-20.22	0	100	H
	* 3901.588	33.9	ADR	33.9	0	-25.71	42.09	54	-11.91	-	-	0	100	H
2	* 1315.421	46.32	PK-U	29.2	0	-28.04	47.48	-	-	74	-26.52	0	201	V
	* 1326.995	34.43	ADR	29.2	0	-28.03	35.6	54	-18.4	-	-	0	201	V
4	* 3891.638	45.6	PK-U	33.9	0	-25.86	53.64	-	-	74	-20.36	0	200	V
	* 3914.856	33.87	ADR	33.9	0	-25.61	42.16	54	-11.84	-	-	0	200	V
5	* 11575.253	56.8	PK-U	38.4	0	-45.33	49.87	-	-	74	-24.13	0	100	H
	* 11561.519	45.18	ADR	38.4	0	-45.22	38.36	54	-15.64	-	-	0	100	H
6	* 11576.001	56.6	PK-U	38.4	0	-45.29	49.71	-	-	74	-24.29	0	201	V
	* 11570.318	45	ADR	38.4	0	-45.26	38.14	54	-15.86	-	-	0	201	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

160MHz

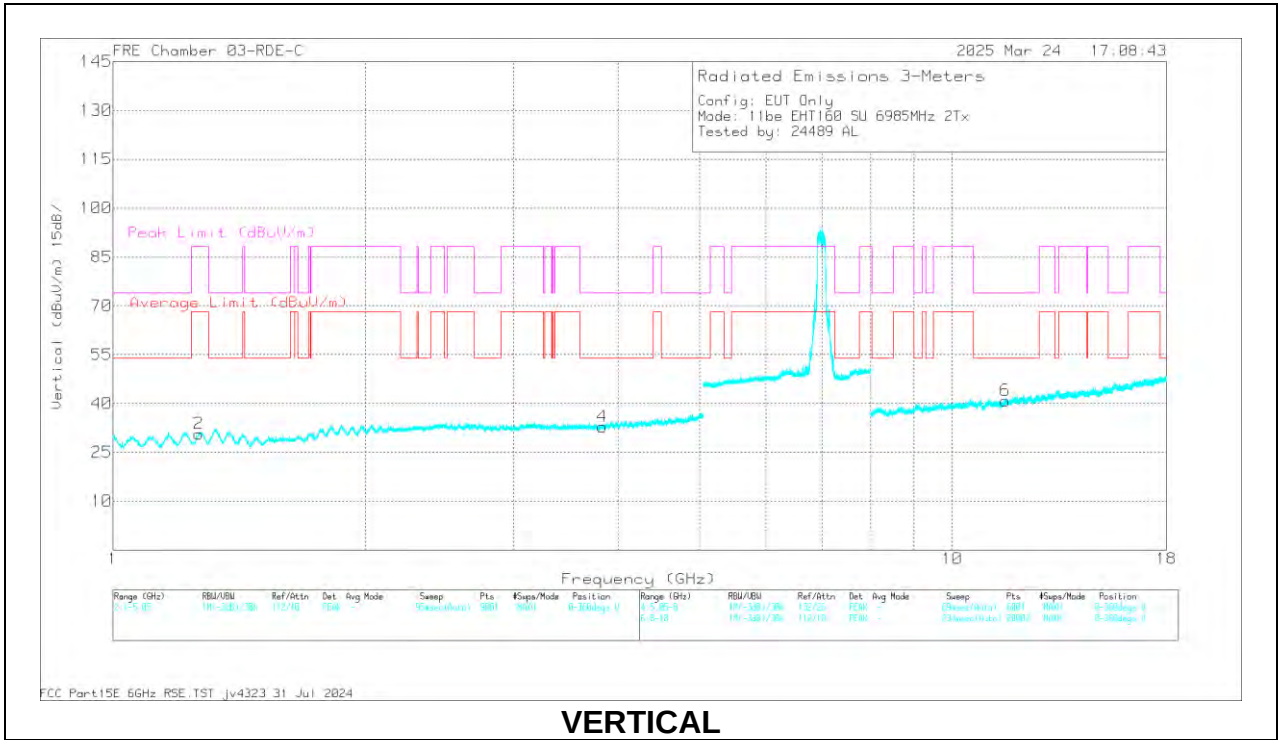
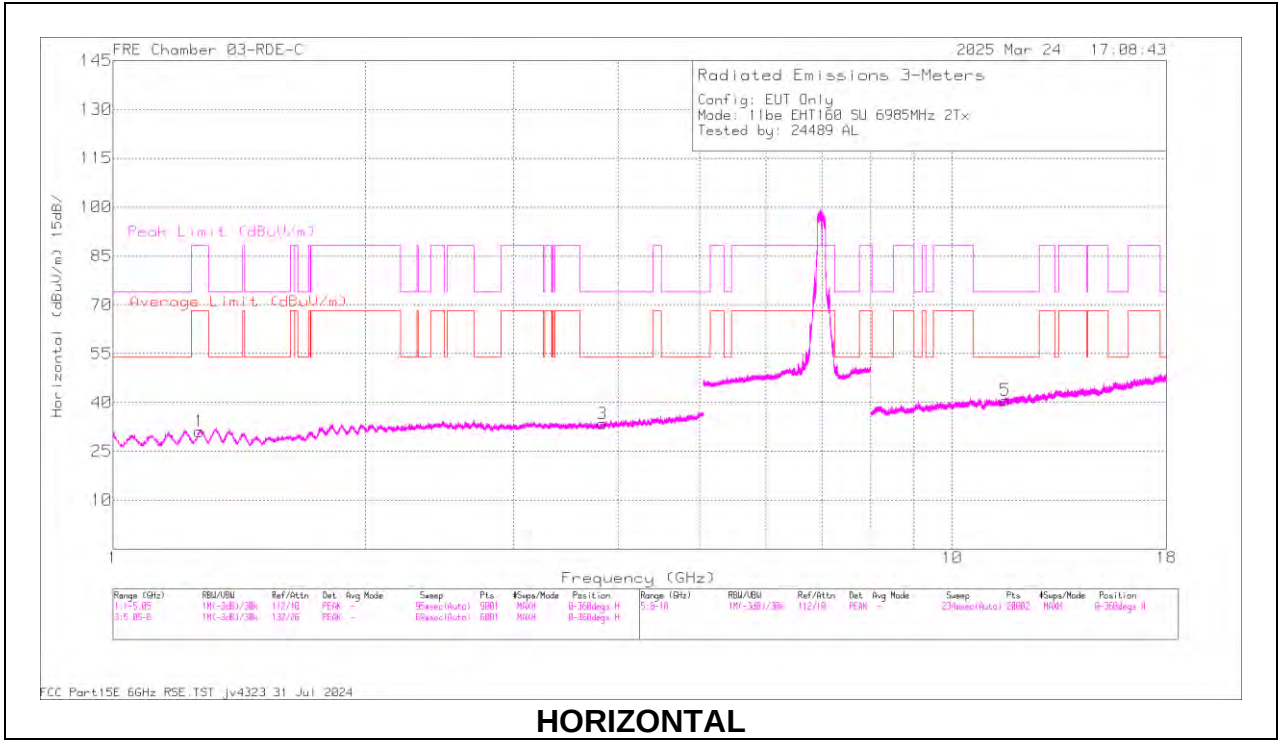
UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Fr tr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6 + 5	* 1.269023	60.78	PK-U	29.3	0	-47.8	42.28	-	-	88.2	-45.92	0	101	H
			* 1.268218	48.34	ADR	29.3	0	-47.88	29.76	68.2	-38.44	-	-	0	101	H
			* 3.828547	56.16	PK-U	33	0	-45.8	43.36	-	-	74	-30.64	0	199	H
			* 3.828362	44.53	ADR	33	0	-45.8	31.73	54	-22.27	-	-	0	199	H
			* 1.265985	60.09	PK-U	29.3	0	-47.9	41.49	-	-	88.2	-46.71	0	101	V
			* 1.26609	48.22	ADR	29.3	0	-47.9	29.62	68.2	-38.58	-	-	0	101	V
			* 3.830313	56.34	PK-U	33	0	-45.8	43.54	-	-	74	-30.46	0	200	V
			* 3.829623	44.4	ADR	33	0	-45.8	31.6	54	-22.4	-	-	0	200	V
			* 11.568404	56.35	PK-U	38.4	0	-43.3	51.45	-	-	74	-22.55	0	200	H
			* 11.570479	44.53	ADR	38.4	0	-43.25	39.68	54	-14.32	-	-	0	200	H
			* 11.570199	56.75	PK-U	38.4	0	-43.28	51.87	-	-	74	-22.13	0	101	V
11be (52T Mode / Highest PSD)	6985	6 + 5	* 11.567662	44.25	ADR	38.4	0	-43.3	39.35	54	-14.65	-	-	0	101	V
			* 1.552194	56.75	PK-U	28.1	0	-46.1	38.75	-	-	74	-35.25	343	357	H
			* 1.552662	45.26	ADR	28.1	0.09	-46.1	27.35	54	-26.65	-	-	343	357	H
			3.176389	55.37	PK-U	33	0	-45.64	42.73	-	-	88.2	-45.47	47	336	H
			3.174566	44.01	ADR	33	0.09	-45.6	31.5	68.2	-36.7	-	-	47	336	H
			* 1.553291	56.64	PK-U	28.1	0	-46.13	38.61	-	-	74	-35.39	147	170	V
			* 1.552955	45.12	ADR	28.1	0.09	-46.1	27.21	54	-26.79	-	-	147	170	V
			3.172158	55.28	PK-U	33	0	-45.6	42.68	-	-	88.2	-45.52	16	192	V
			3.171865	43.72	ADR	33	0.09	-45.61	31.2	68.2	-37	-	-	16	192	V
			* 12.548873	52.52	PK-U	38.7	0	-41.11	50.11	-	-	74	-23.89	16	101	H
			* 12.548356	41.23	ADR	38.7	0.09	-41.16	38.86	54	-15.14	-	-	16	101	H
			* 12.552926	52.58	PK-U	38.7	0	-41.1	50.18	-	-	74	-23.82	16	101	V
			* 12.553224	41.3	ADR	38.7	0.09	-41.08	39.01	54	-14.99	-	-	16	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6985MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.269023	60.78	PK-U	29.3	0	-47.8	42.28	-	-	88.2	-45.92	0	101	H
	* 1.268218	48.34	ADR	29.3	0	-47.88	29.76	68.2	-38.44	-	-	0	101	H
3	* 3.828547	56.16	PK-U	33	0	-45.8	43.36	-	-	74	-30.64	0	199	H
	* 3.828362	44.53	ADR	33	0	-45.8	31.73	54	-22.27	-	-	0	199	H
2	* 1.265985	60.09	PK-U	29.3	0	-47.9	41.49	-	-	88.2	-46.71	0	101	V
	* 1.26609	48.22	ADR	29.3	0	-47.9	29.62	68.2	-38.58	-	-	0	101	V
4	* 3.830313	56.34	PK-U	33	0	-45.8	43.54	-	-	74	-30.46	0	200	V
	* 3.829623	44.4	ADR	33	0	-45.8	31.6	54	-22.4	-	-	0	200	V
5	* 11.568404	56.35	PK-U	38.4	0	-43.3	51.45	-	-	74	-22.55	0	200	H
	* 11.570479	44.53	ADR	38.4	0	-43.25	39.68	54	-14.32	-	-	0	200	H
6	* 11.570199	56.75	PK-U	38.4	0	-43.28	51.87	-	-	74	-22.13	0	101	V
	* 11.567662	44.25	ADR	38.4	0	-43.3	39.35	54	-14.65	-	-	0	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII: AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

UNII-5 band was excluded from band-edge testing due to its starting frequency lies well inside the band-edge threshold.

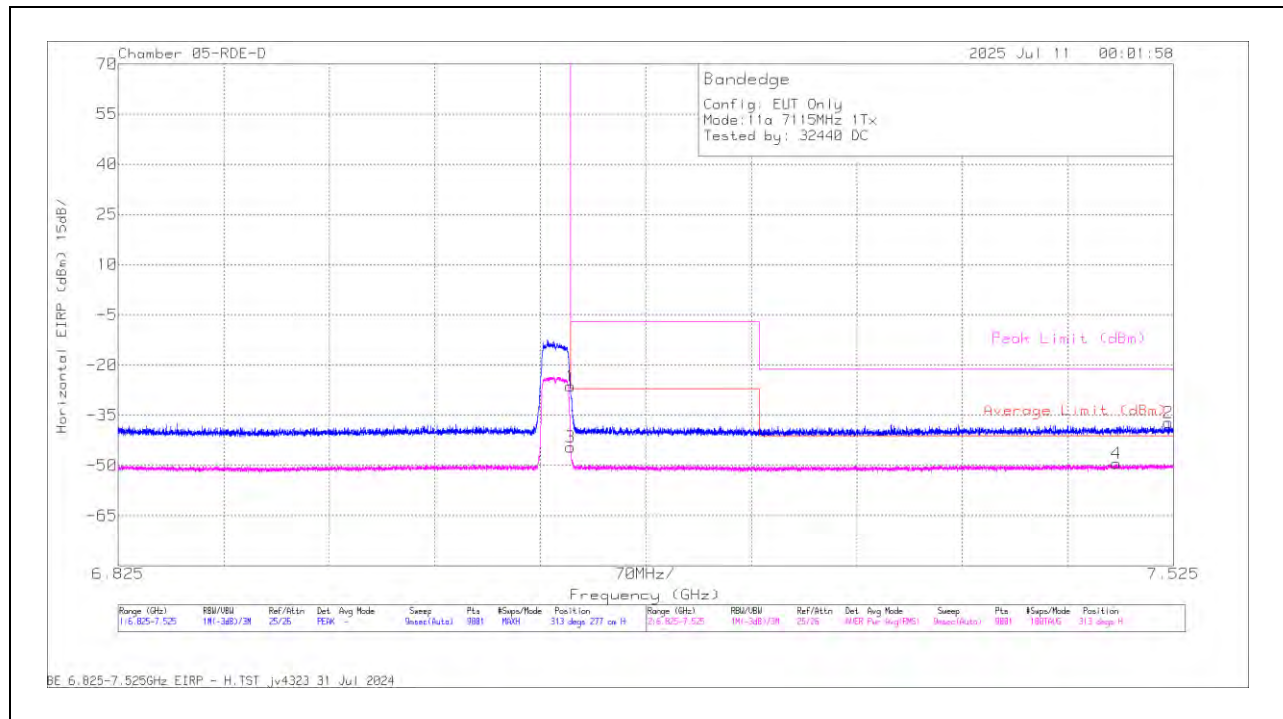
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-36.54	Pk	35.6	11.8	0	-37.18	-26.32	-	-	-7	-19.32	313	277	H
			7.125	-54.75	RMS	35.6	11.8	0	-37.18	-44.53	-27	-17.53	-	-	313	277	H
			* 7.48728	-59.33	RMS	35.6	11.8	0	-37.49	-49.42	-41.2	-8.22	-	-	313	277	H
			* 7.521658	-47.26	Pk	35.6	11.8	0	-37.38	-37.24	-	-	-21.2	-16.04	313	277	H
			7.125	-33.38	Pk	35.6	11.8	0	-37.18	-23.16	-	-	-7	-16.16	22	129	V
			7.125	-51.71	RMS	35.6	11.8	0	-37.18	-41.49	-27	-14.49	-	-	22	129	V
			* 7.375746	-46.76	Pk	35.6	11.8	0	-37.68	-37.04	-	-	-21.2	-15.84	22	129	V
			* 7.464957	-59.35	RMS	35.6	11.8	0	-37.48	-49.43	-41.2	-8.23	-	-	22	129	V
		5	7.125	-34.21	Pk	35.6	11.8	0	-37.18	-23.99	-	-	-7	-16.99	8	171	H
			7.125	-50.19	RMS	35.6	11.8	0	-37.18	-39.97	-27	-12.97	-	-	8	171	H
			* 7.467991	-47.29	Pk	35.6	11.8	0	-37.4	-37.29	-	-	-21.2	-16.09	8	171	H
			* 7.48868	-59.58	RMS	35.6	11.8	0	-37.47	-49.65	-41.2	-8.45	-	-	8	171	H
			7.125	-35	Pk	35.6	11.8	0	-37.18	-24.78	-	-	-7	-17.78	358	185	V
			7.125	-54.01	RMS	35.6	11.8	0	-37.18	-43.79	-27	-16.79	-	-	358	185	V
			* 7.481602	-46.94	Pk	35.6	11.8	0	-37.47	-37.01	-	-	-21.2	-15.81	358	185	V
			* 7.51178	-59.51	RMS	35.6	11.8	0	-37.4	-49.51	-41.2	-8.31	-	-	358	185	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

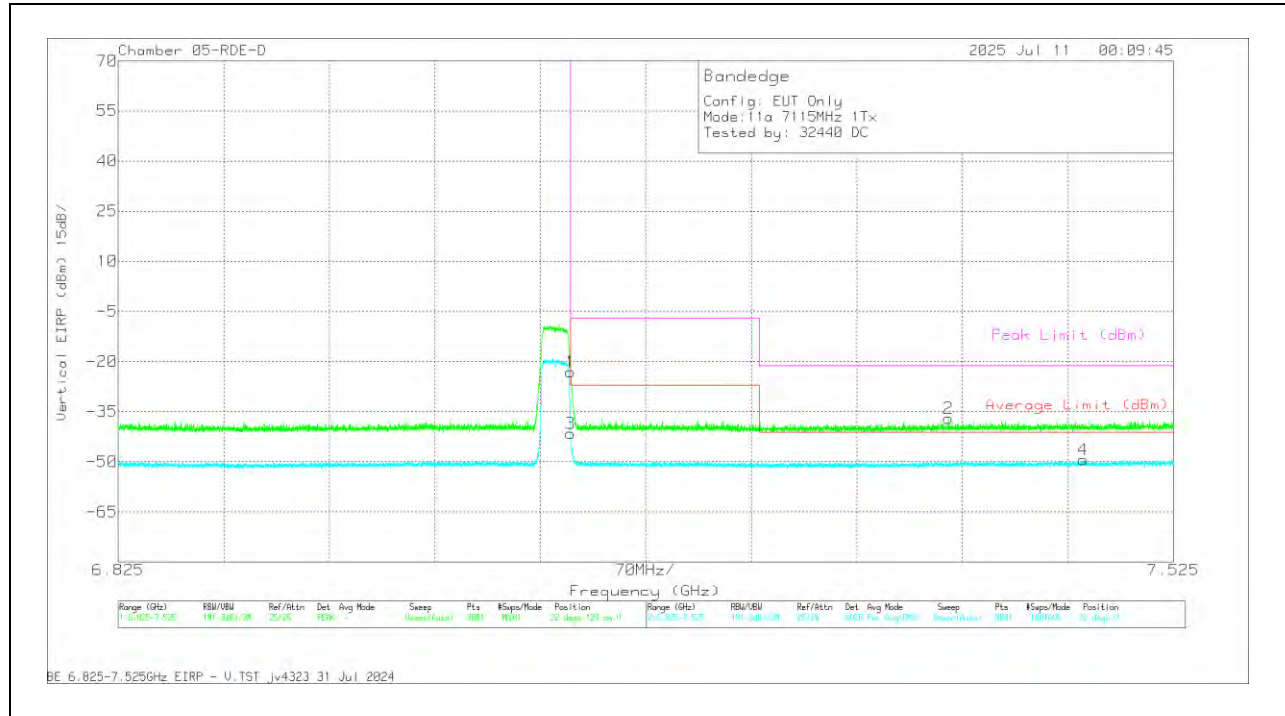
1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-36.54	Pk	35.6	11.8	0	-37.18	-26.32	-	-	-7	-19.32	313	277	H
3	7.125	-54.75	RMS	35.6	11.8	0	-37.18	-44.53	-27	-17.53	-	-	313	277	H
2	* 7.48728	-59.33	RMS	35.6	11.8	0	-37.49	-49.42	-41.2	-8.22	-	-	313	277	H
4	* 7.521658	-47.26	Pk	35.6	11.8	0	-37.38	-37.24	-	-	-21.2	-16.04	313	277	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	7.125	-33.38	Pk	35.6	11.8	0	-37.18	-23.16	-	-	-7	-16.16	22	129	V
1	7.125	-51.71	RMS	35.6	11.8	0	-37.18	-41.49	-27	-14.49	-	-	22	129	V
3	* 7.37574	-46.76	Pk	35.6	11.8	0	-37.68	-37.04	-	-	-21.2	-15.84	22	129	V
2	* 7.46495	-59.35	RMS	35.6	11.8	0	-37.48	-49.43	-41.2	-8.23	-	-	22	129	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

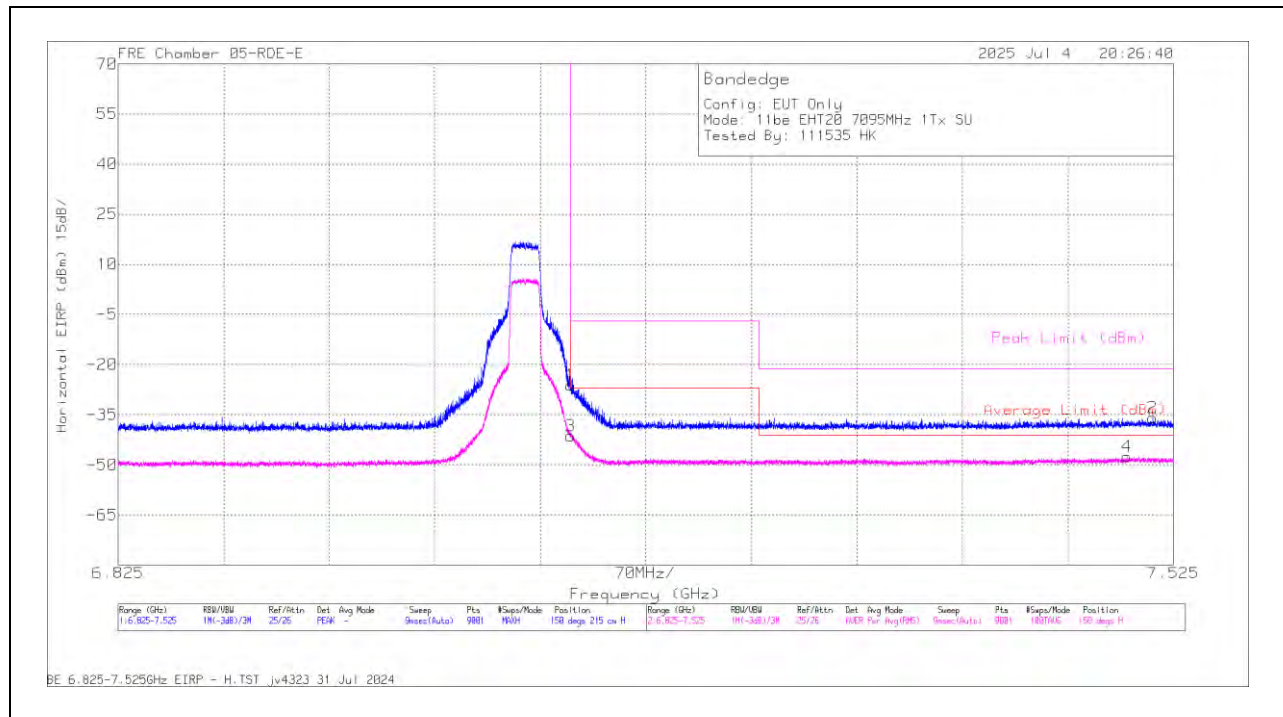
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-39.22	Pk	35.7	11.8	0	-34.4	-26.12	-	-	-7	-19.12	150	215	H
			* 7.511391	-49.96	Pk	35.6	11.8	0	-33.4	-35.96	-	-	-21.2	-14.76	150	215	H
			7.125	-54.5	RMS	35.7	11.8	0	-34.4	-41.4	-27	-14.4	-	-	150	215	H
			* 7.494202	-61.51	RMS	35.6	11.8	0	-33.4	-47.51	-41.2	-6.31	-	-	150	215	H
			7.125	-46.22	Pk	35.7	11.8	0	-34.4	-33.12	-	-	-7	-26.12	177	218	V
			* 7.516991	-50.02	Pk	35.6	11.8	0	-33.4	-36.02	-	-	-21.2	-14.82	177	218	V
			7.125	-59.77	RMS	35.7	11.8	0	-34.4	-46.67	-27	-19.67	-	-	177	218	V
			* 7.495991	-61.89	RMS	35.6	11.8	0	-33.3	-47.79	-41.2	-6.59	-	-	177	218	V
		5	7.125	-42.26	Pk	35.7	11.8	0	-34.4	-29.16	-	-	-7	-22.16	128	101	H
			* 7.349068	-49.21	Pk	35.6	11.8	0	-34.1	-35.91	-	-	-21.2	-14.71	128	101	H
			7.125	-58.61	RMS	35.7	11.8	0	-34.4	-45.51	-27	-18.51	-	-	128	101	H
			* 7.512946	-61.92	RMS	35.6	11.8	0	-33.31	-47.83	-41.2	-6.63	-	-	128	101	H
			7.125	-45.57	Pk	35.7	11.8	0	-34.4	-32.47	-	-	-7	-25.47	125	119	V
			* 7.485257	-49.54	Pk	35.6	11.8	0	-33.47	-35.61	-	-	-21.2	-14.41	125	119	V
			7.125	-60.4	RMS	35.7	11.8	0	-34.4	-47.3	-27	-20.3	-	-	125	119	V
			* 7.500269	-61.97	RMS	35.6	11.8	0	-33.3	-47.87	-41.2	-6.67	-	-	125	119	V
EHT40 (SU Mode)	7085	6	7.125	-30.19	Pk	35.6	11.8	0	-35.24	-18.03	-	-	-7	-11.03	344	315	H
			7.125	-44.92	RMS	35.6	11.8	0	-35.24	-32.76	-27	-5.76	-	-	344	315	H
			7.125223	-44.6	RMS	35.6	11.8	0	-35.26	-32.46	-27	-5.46	-	-	344	315	H
			7.126234	-27.49	Pk	35.6	11.8	0	-35.31	-15.4	-	-	-7	-8.4	344	315	H
			7.125	-35.45	Pk	35.6	11.8	0	-35.24	-23.29	-	-	-7	-16.29	2	224	V
			7.125	-50	RMS	35.6	11.8	0	-35.24	-37.84	-27	-10.84	-	-	2	224	V
			7.126468	-34	Pk	35.6	11.8	0	-35.3	-21.9	-	-	-7	-14.9	2	224	V
			7.251068	-60.83	RMS	35.6	11.8	0	-34.88	-48.31	-41.2	-7.11	-	-	2	224	V
		5	7.125	-33.9	Pk	35.6	11.8	0	-35.24	-21.74	-	-	-7	-14.74	353	163	H
			7.125	-47.24	RMS	35.6	11.8	0	-35.24	-35.08	-27	-8.08	-	-	353	163	H
			7.125923	-31.04	Pk	35.6	11.8	0	-35.31	-18.95	-	-	-7	-11.95	353	163	H
			* 7.278912	-60.78	RMS	35.6	11.8	0	-34.91	-48.29	-41.2	-7.09	-	-	353	163	H
			7.125	-31.95	Pk	35.6	11.8	0	-35.24	-19.79	-	-	-7	-12.79	353	158	V
			7.125	-46.59	RMS	35.6	11.8	0	-35.24	-34.43	-27	-7.43	-	-	353	158	V
			7.125068	-45.35	RMS	35.6	11.8	0	-35.25	-33.2	-27	-6.2	-	-	353	158	V
			7.125612	-30.64	Pk	35.6	11.8	0	-35.29	-18.53	-	-	-7	-11.53	353	158	V
EHT80 (SU Mode)	7025	6	7.125	-37.51	Pk	35.7	11.8	0	-35.93	-25.94	-	-	-7	-18.94	4	119	H
			7.125	-55.07	RMS	35.7	11.8	0	-35.93	-43.5	-27	-16.5	-	-	4	119	H
			* 7.316168	-47.35	Pk	35.7	11.8	0	-35.72	-35.57	-	-	-21.2	-14.37	4	119	H
			* 7.379635	-59.49	RMS	35.8	11.8	0	-35.68	-47.57	-41.2	-6.37	-	-	4	119	H
			7.125	-46.7	Pk	35.7	11.8	0	-35.93	-35.13	-	-	-7	-28.13	350	274	V
			7.125	-59.68	RMS	35.7	11.8	0	-35.93	-48.11	-27	-21.11	-	-	350	274	V
			* 7.27759	-47.31	Pk	35.7	11.8	0	-35.95	-35.76	-	-	-21.2	-14.56	350	274	V
			* 7.384146	-59.77	RMS	35.8	11.8	0	-35.54	-47.71	-41.2	-6.51	-	-	350	274	V
		5	7.125	-42.48	Pk	35.7	11.8	0	-35.93	-30.91	-	-	-7	-23.91	313	169	H
			7.125	-58.86	RMS	35.7	11.8	0	-35.93	-47.29	-27	-20.29	-	-	313	169	H
			* 7.354746	-47.62	Pk	35.8	11.8	0	-35.82	-35.84	-	-	-21.2	-14.64	313	169	H
			* 7.381113	-59.32	RMS	35.8	11.8	0	-35.66	-47.38	-41.2	-6.18	-	-	313	169	H
			7.125	-42.89	Pk	35.7	11.8	0	-35.93	-31.32	-	-	-7	-24.32	305	129	V
			7.125	-58.12	RMS	35.7	11.8	0	-35.93	-46.55	-27	-19.55	-	-	305	129	V
			* 7.420079	-59.39	RMS	35.7	11.8	0	-35.62	-47.51	-41.2	-6.31	-	-	305	129	V
			* 7.437113	-47.35	Pk	35.8	11.8	0	-35.6	-35.35	-	-	-21.2	-14.15	305	129	V
EHT160 (SU Mode)	6985	6	7.125	-32.73	Pk	35.7	11.8	0	-35.85	-21.08	-	-	-7	-14.08	343	193	H
			7.125	-49.96	RMS	35.7	11.8	0.14	-35.85	-38.17	-27	-11.17	-	-	343	193	H
			7.129268	-42.89	RMS	35.7	11.8	0.14	-35.91	-31.16	-27	-4.16	-	-	343	193	H
			7.133312	-28.5	Pk	35.7	11.8	0	-35.87	-16.87	-	-	-7	-9.87	343	193	H
			7.125	-40.55	Pk	35.7	11.8	0	-35.85	-28.9	-	-	-7	-21.9	1	260	V
			7.125	-55.51	RMS	35.7	11.8	0.14	-35.85	-43.72	-27	-16.72	-	-	1	260	V
			* 7.267557	-59.35	RMS	35.7	11.8	0.14	-36.12	-47.83	-41.2	-6.63	-	-	1	260	V
			* 7.316479	-47.59	Pk	35.7	11.8	0	-36.24	-36.33	-	-	-21.2	-15.13	1	260	V
		5	7.125	-42.69	Pk	35.7	11.8	0	-35.85	-31.04	-	-	-7	-24.04	311	244	H
			7.125	-58.78	RMS	35.7	11.8	0.14	-35.85	-46.99	-27	-19.99	-	-	311	244	H
			* 7.250523	-59.49	RMS	35.7	11.8	0.14	-36.13	-47.98	-41.2	-6.78	-	-	311	244	H
			* 7.255268	-46.57	Pk	35.7	11.8	0	-36.16	-35.23	-	-	-21.2	-14.03	311	244	H
			7.125	-42.62	Pk	35.7	11.8	0	-35.85	-30.97	-	-	-7	-23.97	319	215	V
			7.125	-56.84	RMS	35.7	11.8	0.14	-35.85	-45.05	-27	-18.05	-	-	319	215	V
			* 7.292835	-47.2	Pk	35.6	11.8	0	-36.24	-36.04	-	-	-21.2	-14.84	319	215	V
			* 7.322935	-59.21	RMS	35.7	11.8	0.14	-36.32	-47.89	-41.2	-6.69	-	-	319	215	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

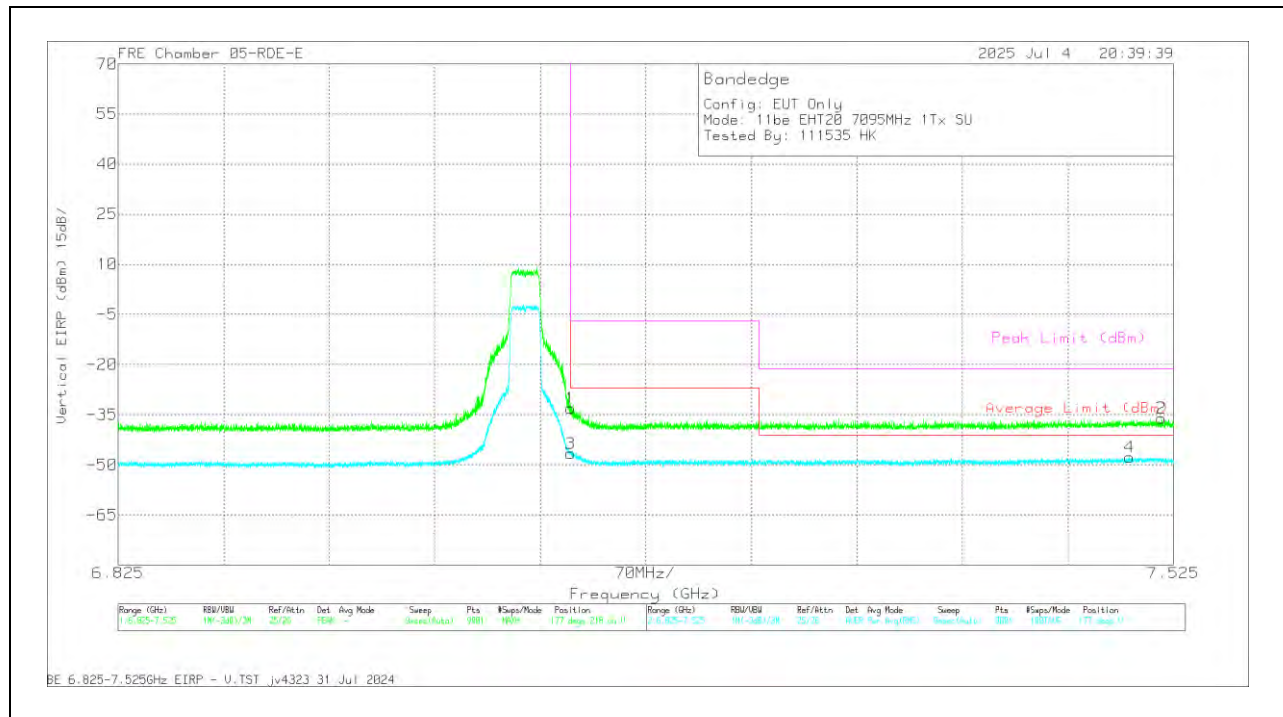
1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-39.22	Pk	35.7	11.8	0	-34.4	-26.12	-	-	-7	-19.12	150	215	H
2	* 7.511391	-49.96	Pk	35.6	11.8	0	-33.4	-35.96	-	-	-21.2	-14.76	150	215	H
3	7.125	-54.5	RMS	35.7	11.8	0	-34.4	-41.4	-27	-14.4	-	-	150	215	H
4	* 7.494202	-61.51	RMS	35.6	11.8	0	-33.4	-47.51	-41.2	-6.31	-	-	150	215	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-46.22	Pk	35.7	11.8	0	-34.4	-33.12	-	-	-7	-26.12	177	218	V
3	* 7.516991	-50.02	Pk	35.6	11.8	0	-33.4	-36.02	-	-	-21.2	-14.82	177	218	V
4	7.125	-59.77	RMS	35.7	11.8	0	-34.4	-46.67	-27	-19.67	-	-	177	218	V
2	* 7.495991	-61.89	RMS	35.6	11.8	0	-33.3	-47.79	-41.2	-6.59	-	-	177	218	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

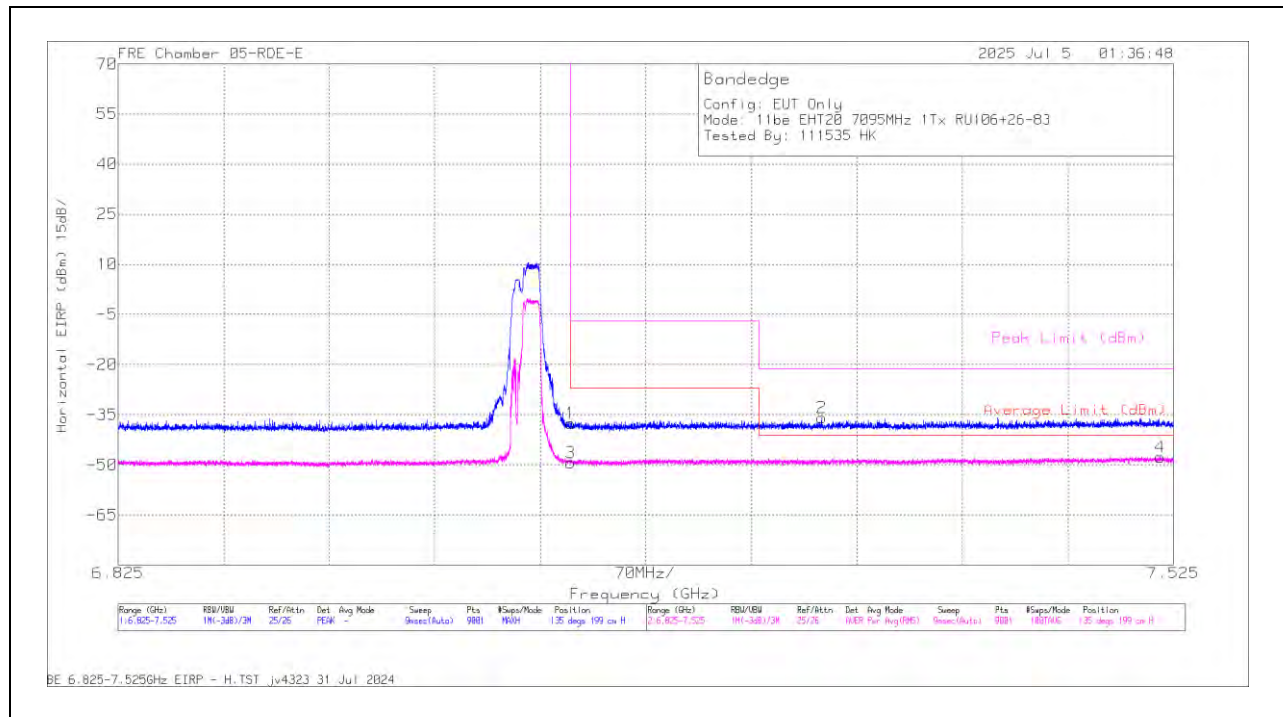
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (MRU 106+26 / Index 83)	7095	6	7.125	-50.57	Pk	35.7	11.8	0	-34.4	-37.47	-	-	-7	-30.47	139	169	H
			* 7.475846	-49.23	Pk	35.6	11.8	0	-33.6	-35.43	-	-	-21.2	-14.23	139	169	H
			7.125	-62.1	RMS	35.7	11.8	0	-34.4	-49	-27	-22	-	-	139	169	H
			* 7.499957	-61.81	RMS	35.6	11.8	0	-33.3	-47.71	-41.2	-6.51	-	-	139	169	H
			7.125	-51.4	Pk	35.7	11.8	0	-34.4	-38.3	-	-	-7	-31.3	174	213	V
			* 7.509058	-49.68	Pk	35.6	11.8	0	-33.4	-35.68	-	-	-21.2	-14.48	174	213	V
		5	7.125	-63.01	RMS	35.7	11.8	0	-34.4	-49.91	-27	-22.91	-	-	174	213	V
			* 7.505791	-61.59	RMS	35.6	11.8	0	-33.4	-47.59	-41.2	-6.39	-	-	174	213	V
			7.125	-50.73	Pk	35.7	11.8	0	-34.4	-37.63	-	-	-7	-30.63	135	199	H
			* 7.291668	-49.09	Pk	35.6	11.8	0	-34.2	-35.89	-	-	-21.2	-14.69	135	199	H
			7.125	-62.64	RMS	35.7	11.8	0	-34.4	-49.54	-27	-22.54	-	-	135	199	H
			* 7.516058	-61.82	RMS	35.6	11.8	0	-33.4	-47.82	-41.2	-6.62	-	-	135	199	H
		4	7.125	-52.28	Pk	35.7	11.8	0	-34.4	-39.18	-	-	-7	-32.18	119	134	V
			* 7.513258	-50.23	Pk	35.6	11.8	0	-33.33	-36.16	-	-	-21.2	-14.96	119	134	V
			7.125	-62.41	RMS	35.7	11.8	0	-34.4	-49.31	-27	-22.31	-	-	119	134	V
			* 7.499569	-61.56	RMS	35.6	11.8	0	-33.3	-47.46	-41.2	-6.26	-	-	119	134	V
			7.125	-50.07	Pk	35.7	11.8	0	-35.85	-38.42	-	-	-7	-31.42	144	172	H
			7.125	-60.27	RMS	35.7	11.8	0	-35.85	-48.62	-27	-21.62	-	-	144	172	H
EHT40 (RU 106 / Index 85)	7085	6	7.26289	-59.48	RMS	35.7	11.8	0	-36.24	-48.22	-41.2	-7.02	-	-	144	172	H
			7.449168	-47.05	Pk	35.7	11.8	0	-36.59	-36.14	-	-	-21.2	-14.94	144	172	H
			7.125	-50.1	Pk	35.7	11.8	0	-35.85	-38.45	-	-	-7	-31.45	185	217	V
			7.125	-60.5	RMS	35.7	11.8	0	-35.85	-48.85	-27	-21.85	-	-	185	217	V
			7.300612	-47.19	Pk	35.6	11.8	0	-36.16	-35.95	-	-	-21.2	-14.75	185	217	V
			7.463557	-59.15	RMS	35.7	11.8	0	-36.5	-48.15	-41.2	-6.95	-	-	185	217	V
		5	7.125	-50.05	Pk	35.7	11.8	0	-35.85	-38.4	-	-	-7	-31.4	173	165	H
			7.125	-60.38	RMS	35.7	11.8	0	-35.85	-48.73	-27	-21.73	-	-	173	165	H
			7.263123	-59.55	RMS	35.7	11.8	0	-36.24	-48.29	-41.2	-7.09	-	-	173	165	H
			7.309713	-47.47	Pk	35.7	11.8	0	-36.28	-36.25	-	-	-21.2	-15.05	173	165	H
			7.125	-49.96	Pk	35.7	11.8	0	-35.85	-38.31	-	-	-7	-31.31	171	173	V
			7.125	-60.69	RMS	35.7	11.8	0	-35.85	-49.04	-27	-22.04	-	-	171	173	V
		4	7.403124	-47.31	Pk	35.7	11.8	0	-36.32	-36.13	-	-	-21.2	-14.93	171	173	V
			7.406624	-59.33	RMS	35.7	11.8	0	-36.42	-48.25	-41.2	-7.05	-	-	171	173	V
			* 7.372324	-48.2	Pk	35.6	11.8	0	-35.57	-36.37	-	-	-21.2	-15.17	217	130	H
			* 7.259079	-60.71	RMS	35.6	11.8	0.12	-35.39	-48.58	-41.2	-7.38	-	-	217	130	H
			7.125	-44.44	Pk	35.7	11.8	0	-35.7	-32.64	-	-	-7	-25.64	217	130	H
			7.125	-59.3	RMS	35.7	11.8	0.12	-35.7	-47.38	-27	-20.38	-	-	217	130	H
EHT80 (MRU 484+242 / Index 92)	7025	6	* 7.47258	-48.41	Pk	35.6	11.8	0	-35.7	-36.71	-	-	-21.2	-15.51	226	127	V
			* 7.524458	-60.53	RMS	35.7	11.8	0.12	-35.5	-48.41	-41.2	-7.21	-	-	226	127	V
			7.125	-50.2	Pk	35.7	11.8	0	-35.7	-38.4	-	-	-7	-31.4	226	127	V
			7.125	-60.94	RMS	35.7	11.8	0.12	-35.7	-49.02	-27	-22.02	-	-	226	127	V
			* 7.292835	-48.69	Pk	35.5	11.8	0	-35.7	-37.09	-	-	-21.2	-15.89	192	192	H
			* 7.499257	-60.43	RMS	35.7	11.8	0.12	-35.7	-48.51	-41.2	-7.31	-	-	192	192	H
		5	7.125	-46.65	Pk	35.7	11.8	0	-35.7	-34.85	-	-	-7	-27.85	192	192	H
			7.125	-59.73	RMS	35.7	11.8	0.12	-35.7	-47.81	-27	-20.81	-	-	192	192	H
			* 7.515824	-48.26	Pk	35.7	11.8	0	-35.7	-36.46	-	-	-21.2	-15.26	170	125	V
			* 7.380724	-60.57	RMS	35.6	11.8	0.12	-35.5	-48.55	-41.2	-7.35	-	-	170	125	V
			7.125	-49.66	Pk	35.7	11.8	0	-35.7	-37.86	-	-	-7	-30.86	170	125	V
			7.125	-61.08	RMS	35.7	11.8	0.12	-35.7	-49.16	-27	-22.16	-	-	170	125	V
		4	7.125	-49.68	Pk	35.7	11.8	0	-35.85	-38.03	-	-	-7	-31.03	351	241	V
			7.125	-60.63	RMS	35.7	11.8	0	-35.85	-48.98	-27	-21.98	-	-	351	241	V
			7.252779	-47.26	Pk	35.7	11.8	0	-36.13	-35.89	-	-	-21.2	-14.69	351	241	V
			7.337324	-59.2	RMS	35.7	11.8	0	-36.3	-48	-41.2	-6.8	-	-	351	241	V
			7.125	-48.85	Pk	35.7	11.8	0	-35.85	-37.2	-	-	-7	-30.2	346	215	H
			7.125	-60.11	RMS	35.7	11.8	0	-35.85	-48.46	-27	-21.46	-	-	346	215	H
EHT160 (RU 106 / Index S60)	6985	6	7.293768	-46.88	Pk	35.6	11.8	0	-36.21	-35.69	-	-	-21.2	-14.49	346	215	H
			7.371235	-59.3	RMS	35.7	11.8	0	-36.27	-48.07	-41.2	-6.87	-	-	346	215	H
		5	7.125	-50.12	Pk	35.7	11.8	0	-35.85	-38.47	-	-	-7	-31.47	321	100	H
			7.125	-60.14	RMS	35.7	11.8	0	-35.85	-48.49	-27	-21.49	-	-	321	100	H
			7.264912	-47.43	Pk	35.7	11.8	0	-36.19	-36.12	-	-	-21.2	-14.92	321	100	H
			7.366568	-59.14	RMS	35.7	11.8	0	-36.37	-48.01	-41.2	-6.81	-	-	321	100	H
			7.125	-49.13	Pk	35.7	11.8	0	-35.85	-37.48	-	-	-7	-30.48	357	106	V
			7.125	-60.7	RMS	35.7	11.8	0	-35.85	-49.05	-27	-22.05	-	-	357	106	V
			7.369913	-59.34	RMS	35.7	11.8	0	-36.31	-48.15	-41.2	-6.95	-	-	357	106	V
			7.52438	-47.19	Pk	35.7	11.8	0	-36.56	-36.25	-	-	-21.2	-15.05	357	106	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

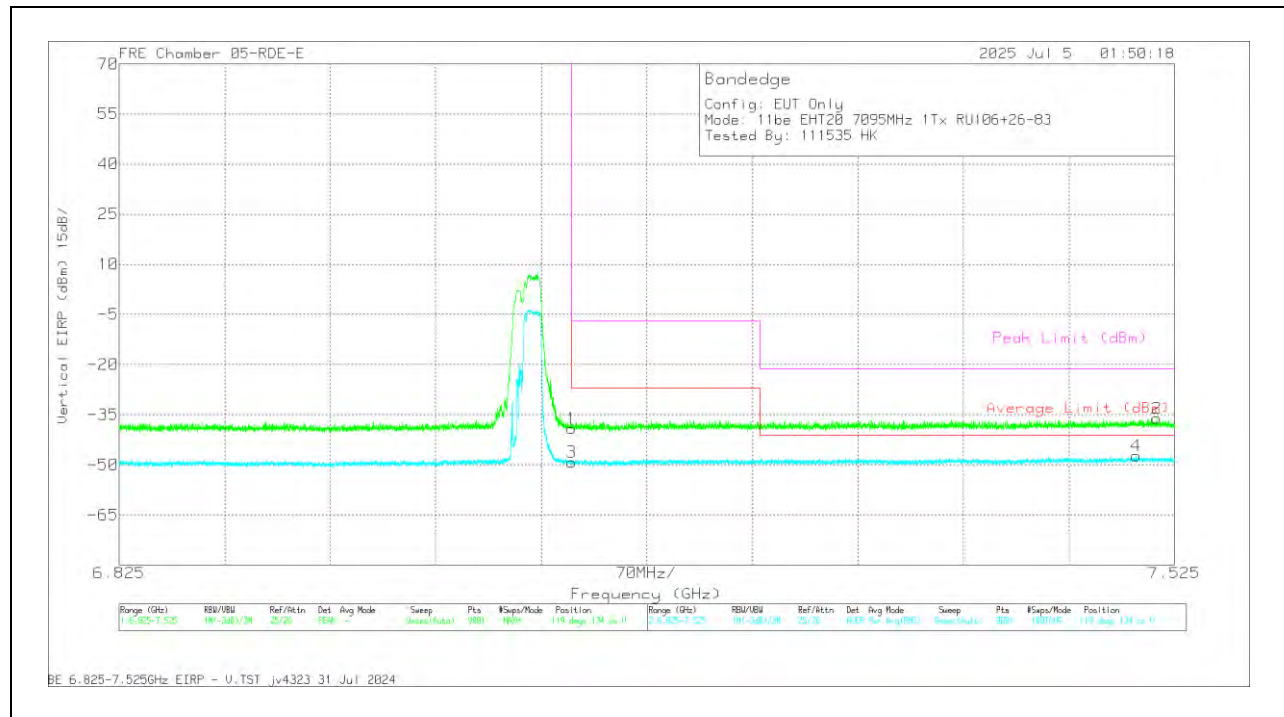
1TX Antenna 5 MODE: MRU 106+26-Tone, Index 83**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-50.73	Pk	35.7	11.8	0	-34.4	-37.63	-	-	-7	-30.63	135	199	H
2	* 7.29166	-49.09	Pk	35.6	11.8	0	-34.2	-35.89	-	-	-21.2	-14.69	135	199	H
3	7.125	-62.64	RMS	35.7	11.8	0	-34.4	-49.54	-27	-22.54	-	-	135	199	H
4	* 7.51605	-61.82	RMS	35.6	11.8	0	-33.4	-47.82	-41.2	-6.62	-	-	135	199	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-52.28	Pk	35.7	11.8	0	-34.4	-39.18	-	-	-7	-32.18	119	134	V
2	* 7.51325	-50.23	Pk	35.6	11.8	0	-33.33	-36.16	-	-	-21.2	-14.96	119	134	V
3	7.125	-62.41	RMS	35.7	11.8	0	-34.4	-49.31	-27	-22.31	-	-	119	134	V
4	* 7.49956	-61.56	RMS	35.6	11.8	0	-33.3	-47.46	-41.2	-6.26	-	-	119	134	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

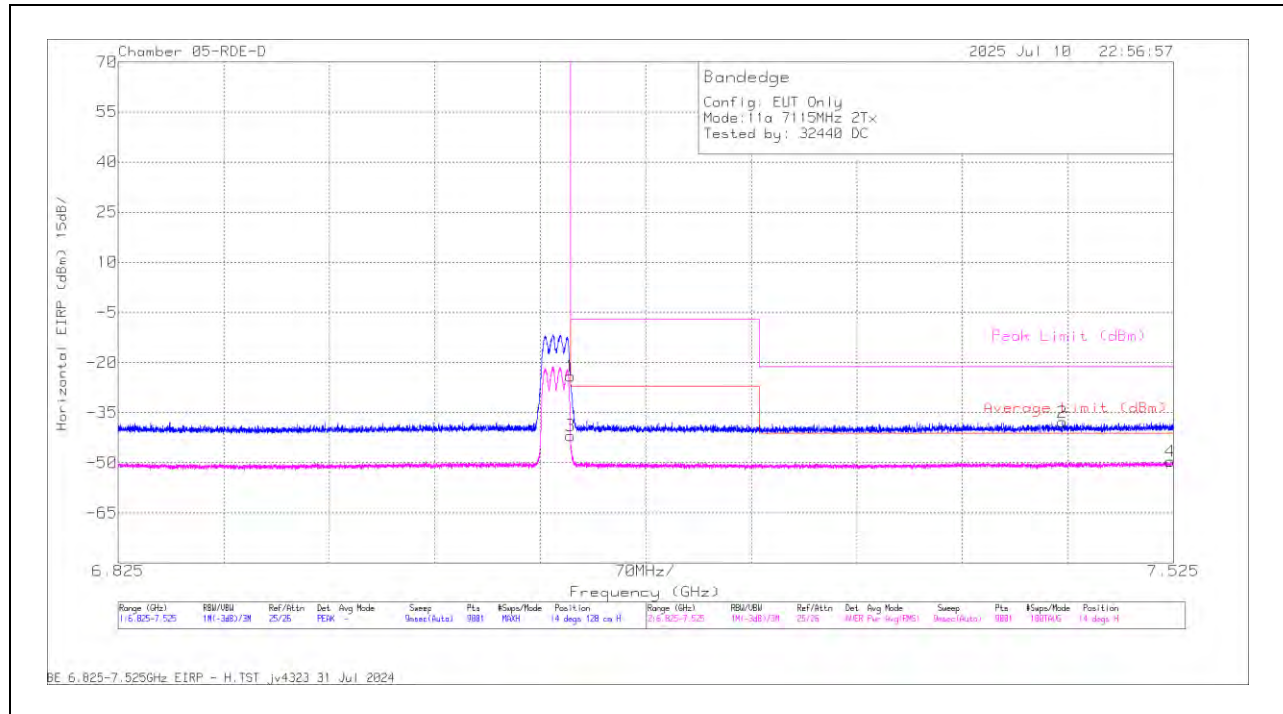
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-34.3	Pk	35.6	11.8	0	-37.18	-24.08	-	-	-7	-17.08	14	128	H
			7.125	-52.18	RMS	35.6	11.8	0	-37.18	-41.96	-27	-14.96	-	-	14	128	H
			* 7.451346	-47.77	Pk	35.6	11.8	0	-37.49	-37.86	-	-	-21.2	-16.66	14	128	H
			* 7.522824	-59.66	RMS	35.6	11.8	0	-37.38	-49.64	-41.2	-8.44	-	-	14	128	H
			7.125	-37.17	Pk	35.6	11.8	0	-37.18	-26.95	-	-	-7	-19.95	2	145	V
			7.125	-53.09	RMS	35.6	11.8	0	-37.18	-42.87	-27	-15.87	-	-	2	145	V
			* 7.492335	-59.24	RMS	35.6	11.8	0	-37.48	-49.32	-41.2	-8.12	-	-	2	145	V
			* 7.502913	-47.74	Pk	35.6	11.8	0	-37.37	-37.71	-	-	-21.2	-16.51	2	145	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

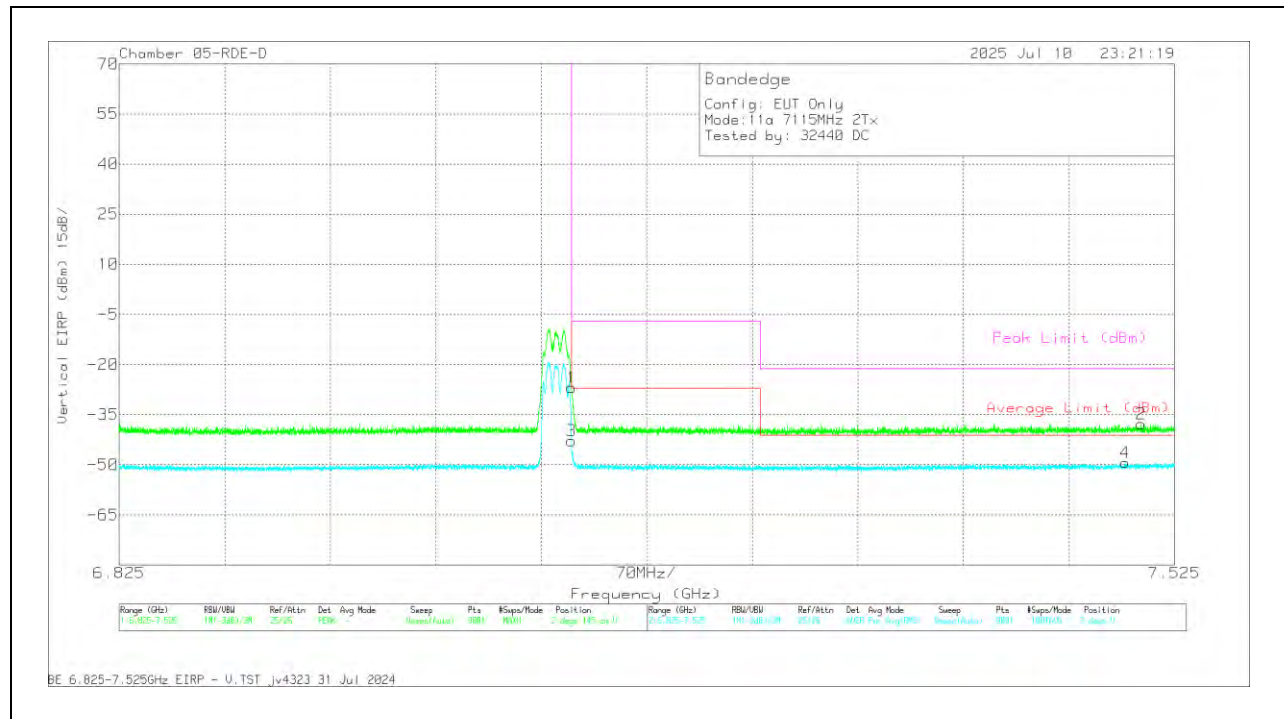
2TX Antenna 6+5 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	7.125	-34.3	Pk	35.6	11.8	0	-37.18	-24.08	-	-	-7	-17.08	14	128	H
1	7.125	-52.18	RMS	35.6	11.8	0	-37.18	-41.96	-27	-14.96	-	-	14	128	H
3	* 7.45134	-47.77	Pk	35.6	11.8	0	-37.49	-37.86	-	-	-21.2	-16.66	14	128	H
2	* 7.52282	-59.66	RMS	35.6	11.8	0	-37.38	-49.64	-41.2	-8.44	-	-	14	128	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-37.17	Pk	35.6	11.8	0	-37.18	-26.95	-	-	-7	-19.95	2	145	V
3	7.125	-53.09	RMS	35.6	11.8	0	-37.18	-42.87	-27	-15.87	-	-	2	145	V
2	*7.49233	-59.24	RMS	35.6	11.8	0	-37.48	-49.32	-41.2	-8.12	-	-	2	145	V
4	*7.50291	-47.74	Pk	35.6	11.8	0	-37.37	-37.71	-	-	-21.2	-16.51	2	145	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-44.14	Pk	35.7	11.8	0	-34.4	-31.04	-	-	-7	-24.04	214	167	H
			* 7.48121	-49.5	Pk	35.6	11.8	0	-33.58	-35.68	-	-	-21.2	-14.48	214	167	H
			7.125	-60.51	RMS	35.7	11.8	0	-34.4	-47.41	-27	-20.41	-	-	214	167	H
			* 7.51426	-61.66	RMS	35.6	11.8	0	-33.4	-47.66	-41.2	-6.46	-	-	214	167	H
			7.125	-36.97	Pk	35.7	11.8	0	-34.4	-23.87	-	-	-7	-16.87	162	107	V
			* 7.46830	-49.25	Pk	35.6	11.8	0	-33.6	-35.45	-	-	-21.2	-14.25	162	107	V
			7.125	-56.6	RMS	35.7	11.8	0	-34.4	-43.5	-27	-16.5	-	-	162	107	V
			* 7.45539	-61.31	RMS	35.6	11.8	0	-33.6	-47.51	-41.2	-6.31	-	-	162	107	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-28.59	Pk	35.6	11.8	0	-35.24	-16.43	-	-	-7	-9.43	353	191	H
			7.125	-44.01	RMS	35.6	11.8	0	-35.24	-31.85	-27	-4.85	-	-	353	191	H
			7.126001	-41.8	RMS	35.6	11.8	0	-35.32	-29.72	-27	-2.72	-	-	353	191	H
			7.126545	-26.67	Pk	35.6	11.8	0	-35.3	-14.57	-	-	-7	-7.57	353	191	H
			7.125	-29.89	Pk	35.6	11.8	0	-35.24	-17.73	-	-	-7	-10.73	1	315	V
			7.125	-44.4	RMS	35.6	11.8	0	-35.24	-32.24	-27	-5.24	-	-	1	315	V
			7.125301	-43.84	RMS	35.6	11.8	0	-35.26	-31.7	-27	-4.7	-	-	1	315	V
			7.125456	-29.34	Pk	35.6	11.8	0	-35.28	-17.22	-	-	-7	-10.22	1	315	V
EHT80 (SU Mode)	7025	6 + 5	7125	-42.22	Pk	35.7	11.8	0	-35.93	-30.65	-	-	-7	-23.65	351	113	H
			7125	-57.86	RMS	35.7	11.8	0	-35.93	-46.29	-27	-19.29	-	-	351	113	H
			7378.002	-47.6	Pk	35.8	11.8	0	-35.71	-35.71	-	-	-21.2	-14.51	351	113	H
			7424.824	-59.67	RMS	35.7	11.8	0	-35.5	-47.67	-41.2	-6.47	-	-	351	113	H
			7125	-35.78	Pk	35.7	11.8	0	-35.93	-24.21	-	-	-7	-17.21	344	105	V
			7125	-53.99	RMS	35.7	11.8	0	-35.93	-42.42	-27	-15.42	-	-	344	105	V
			7380.257	-47.5	Pk	35.8	11.8	0	-35.67	-35.57	-	-	-21.2	-14.37	344	105	V
			7390.213	-59.59	RMS	35.7	11.8	0	-35.61	-47.7	-41.2	-6.5	-	-	344	105	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-39.91	Pk	35.7	11.8	0	-35.85	-28.26	-	-	-7	-21.26	270	238	H
			7.125	-59.02	RMS	35.7	11.8	0.14	-35.85	-47.23	-27	-20.23	-	-	270	238	H
			7.132456	-44.62	RMS	35.7	11.8	0.14	-35.92	-32.9	-27	-5.9	-	-	270	238	H
			7.132612	-31.72	Pk	35.7	11.8	0	-35.91	-20.13	-	-	-7	-13.13	270	238	H
			7.125	-32.9	Pk	35.7	11.8	0	-35.85	-21.25	-	-	-7	-14.25	312	230	V
			7.125	-50.19	RMS	35.7	11.8	0.14	-35.85	-38.4	-27	-11.4	-	-	312	230	V
			7.13339	-27.81	Pk	35.7	11.8	0	-35.87	-16.18	-	-	-7	-9.18	312	230	V
			7.133623	-42.64	RMS	35.7	11.8	0.14	-35.87	-30.87	-27	-3.87	-	-	312	230	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

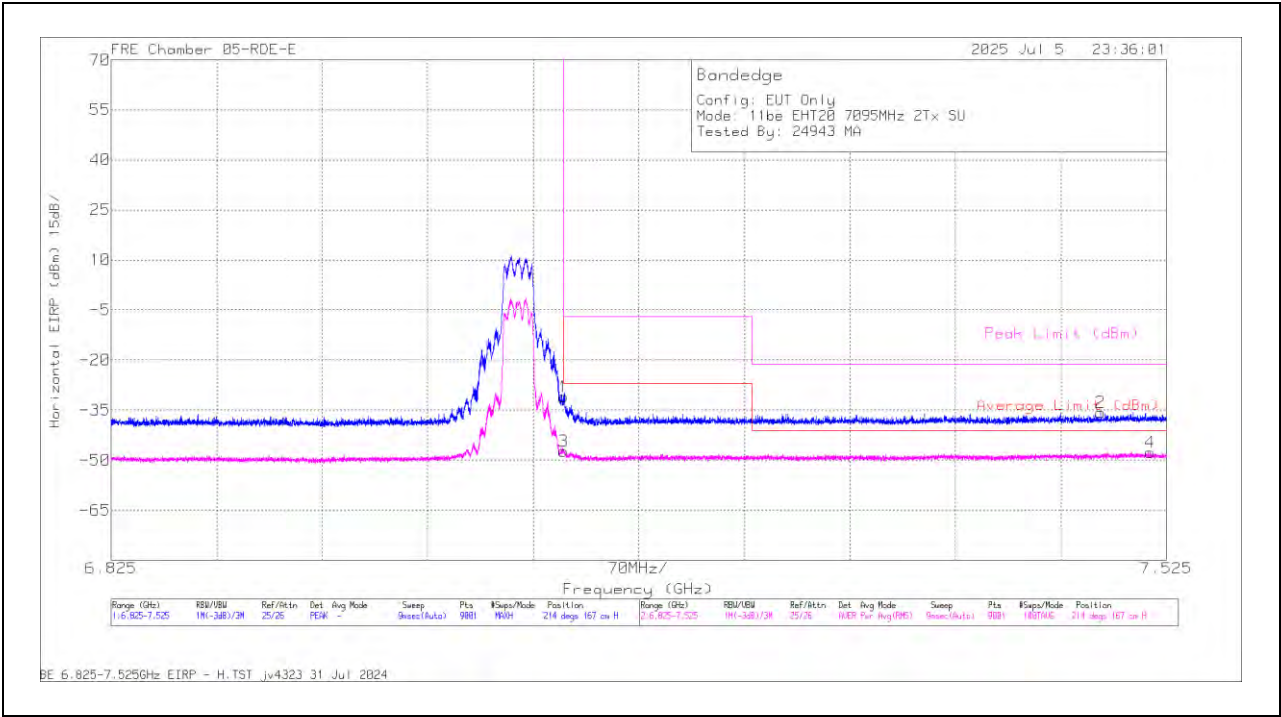
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU

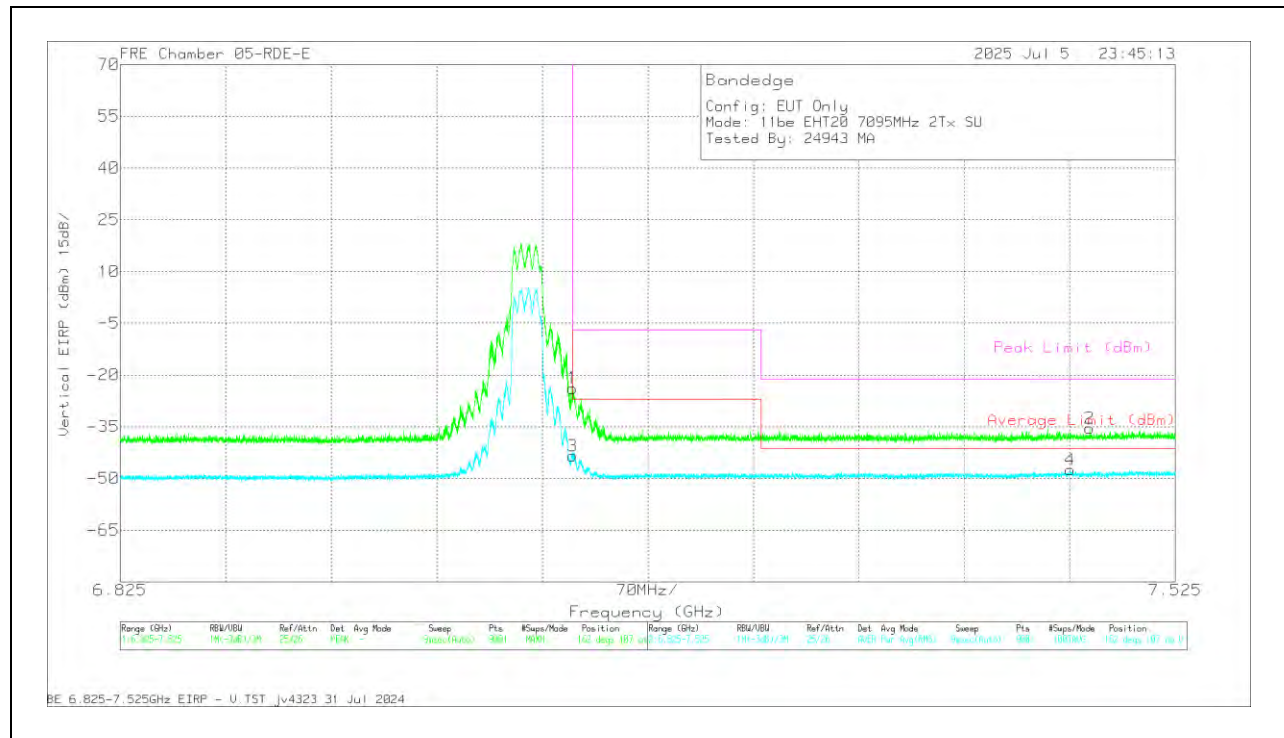
BANDEDGE (HIGH CHANNEL / 7095MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-44.14	Pk	35.7	11.8	0	-34.4	-31.04	-	-	-7	-24.04	214	167	H
2	* 7.48121	-49.5	Pk	35.6	11.8	0	-33.58	-35.68	-	-	-21.2	-14.48	214	167	H
3	7.125	-60.51	RMS	35.7	11.8	0	-34.4	-47.41	-27	-20.41	-	-	214	167	H
4	* 7.51426	-61.66	RMS	35.6	11.8	0	-33.4	-47.66	-41.2	-6.46	-	-	214	167	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-36.97	Pk	35.7	11.8	0	-34.4	-23.87	-	-	-7	-16.87	162	107	V
2	* 7.46830	-49.25	Pk	35.6	11.8	0	-33.6	-35.45	-	-	-21.2	-14.25	162	107	V
3	7.125	-56.6	RMS	35.7	11.8	0	-34.4	-43.5	-27	-16.5	-	-	162	107	V
4	* 7.45539	-61.31	RMS	35.6	11.8	0	-33.6	-47.51	-41.2	-6.31	-	-	162	107	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

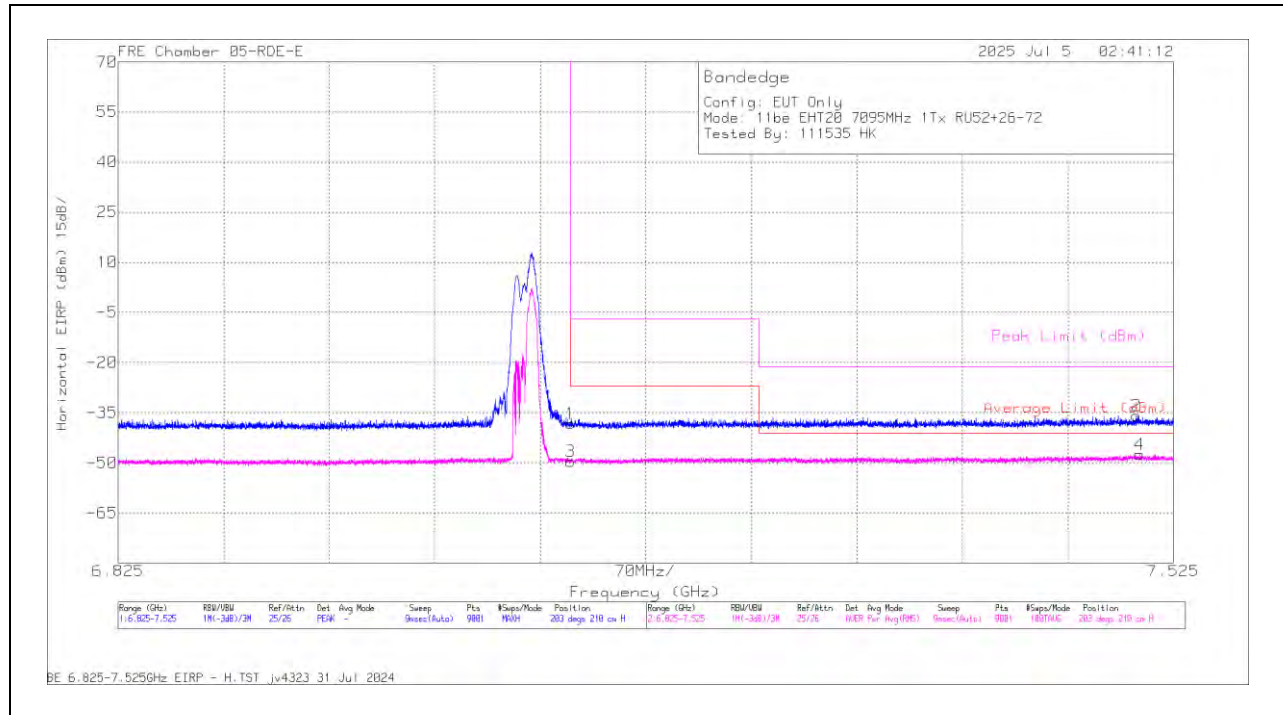
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (MRU 52+26 / Index 72)	7095	6 + 5	7.125	-51.34	Pk	35.7	11.8	0	-34.4	-38.24	-	-	-7	-31.24	203	210	H
			* 7.500269	-49.98	Pk	35.6	11.8	0	-33.3	-35.88	-	-	-21.2	-14.68	203	210	H
			7.125	-62.63	RMS	35.7	11.8	0	-34.4	-49.53	-27	-22.53	-	-	203	210	H
			* 7.502446	-61.55	RMS	35.6	11.8	0	-33.29	-47.44	-41.2	-6.24	-	-	203	210	H
			7.125	-51.26	Pk	35.7	11.8	0	-34.4	-38.16	-	-	-7	-31.16	157	161	V
			* 7.501124	-49.96	Pk	35.6	11.8	0	-33.29	-35.85	-	-	-21.2	-14.65	157	161	V
			7.125	-61.95	RMS	35.7	11.8	0	-34.4	-48.85	-27	-21.85	-	-	157	161	V
			* 7.498635	-61.8	RMS	35.6	11.8	0	-33.3	-47.7	-41.2	-6.5	-	-	157	161	V
EHT40 (RU 106 / Index 56)	7085	6 + 5	7.125	-49.63	Pk	35.7	11.8	0	-35.85	-37.98	-	-	-7	-30.98	140	104	H
			7.125	-60.73	RMS	35.7	11.8	0	-35.85	-49.08	-27	-22.08	-	-	140	104	H
			7.312513	-59.51	RMS	35.7	11.8	0	-36.23	-48.24	-41.2	-7.04	-	-	140	104	H
			7.412146	-47.32	Pk	35.7	11.8	0	-36.42	-36.24	-	-	-21.2	-15.04	140	104	H
			7.125	-48	Pk	35.7	11.8	0	-35.85	-36.35	-	-	-7	-29.35	142	106	V
			7.125	-60.14	RMS	35.7	11.8	0	-35.85	-48.49	-27	-21.49	-	-	142	106	V
			7.251068	-59.59	RMS	35.7	11.8	0	-36.13	-48.22	-41.2	-7.02	-	-	142	106	V
			7.253712	-47.47	Pk	35.7	11.8	0	-36.13	-36.1	-	-	-21.2	-14.9	142	106	V
EHT80 (RU 484 / Index 66)	7025	6 + 5	7.125	-51.16	Pk	35.7	11.8	0	-34.4	-38.06	-	-	-7	-31.06	175	105	H
			* 7.43338	-49.63	Pk	35.6	11.8	0	-33.8	-36.03	-	-	-21.2	-14.83	175	105	H
			7.125	-62.66	RMS	35.7	11.8	0	-34.4	-49.56	-27	-22.56	-	-	175	105	H
			* 7.498246	-61.83	RMS	35.6	11.8	0	-33.3	-47.73	-41.2	-6.53	-	-	175	105	H
			7.125	-51.37	Pk	35.7	11.8	0	-34.4	-38.27	-	-	-7	-31.27	125	213	V
			* 7.443257	-49.2	Pk	35.6	11.8	0	-33.63	-35.43	-	-	-21.2	-14.23	125	213	V
			7.125	-62.55	RMS	35.7	11.8	0	-34.4	-49.45	-27	-22.45	-	-	125	213	V
			* 7.499024	-61.56	RMS	35.6	11.8	0	-33.3	-47.46	-41.2	-6.26	-	-	125	213	V
EHT160 (MRU 996+484 / Index 95 sb0)	6985	6 + 5	* 7.497624	-47.59	Pk	35.7	11.8	0	-35.7	-35.79	-	-	-21.2	-14.59	140	218	H
			* 7.52438	-60.48	RMS	35.7	11.8	0.1	-35.5	-48.38	-41.2	-7.18	-	-	140	218	H
			7.125	-48.11	Pk	35.7	11.8	0	-35.7	-36.31	-	-	-7	-29.31	140	218	H
			7.125	-60.05	RMS	35.7	11.8	0.1	-35.7	-48.15	-27	-21.15	-	-	140	218	H
			* 7.266935	-48.01	Pk	35.6	11.8	0	-35.29	-35.9	-	-	-21.2	-14.7	185	397	V
			* 7.374657	-60.36	RMS	35.6	11.8	0.1	-35.5	-48.36	-41.2	-7.16	-	-	185	397	V
			7.125	-48.49	Pk	35.7	11.8	0	-35.7	-36.69	-	-	-7	-29.69	185	397	V
			7.125	-59.46	RMS	35.7	11.8	0.1	-35.7	-47.56	-27	-20.56	-	-	185	397	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

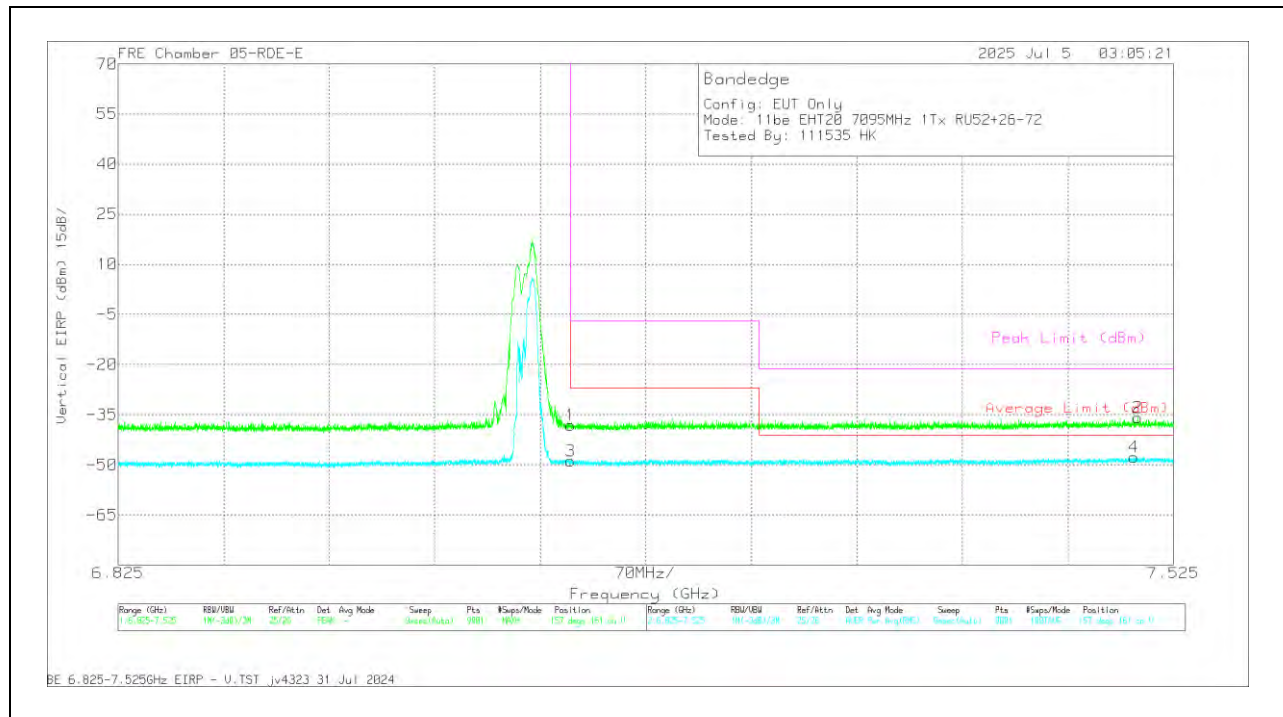
2TX Antenna 6 + Antenna 5 OFDMA MODE: MRU 106+26-Tone, Index 72**BANDEGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-51.34	Pk	35.7	11.8	0	-34.4	-38.24	-	-	-7	-31.24	203	210	H
2	* 7.500269	-49.98	Pk	35.6	11.8	0	-33.3	-35.88	-	-	-21.2	-14.68	203	210	H
3	7.125	-62.63	RMS	35.7	11.8	0	-34.4	-49.53	-27	-22.53	-	-	203	210	H
4	* 7.502446	-61.55	RMS	35.6	11.8	0	-33.29	-47.44	-41.2	-6.24	-	-	203	210	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80404 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-51.26	Pk	35.7	11.8	0	-34.4	-38.16	-	-	-7	-31.16	157	161	V
2	* 7.501124	-49.96	Pk	35.6	11.8	0	-33.29	-35.85	-	-	-21.2	-14.65	157	161	V
3	7.125	-61.95	RMS	35.7	11.8	0	-34.4	-48.85	-27	-21.85	-	-	157	161	V
4	* 7.498635	-61.8	RMS	35.6	11.8	0	-33.3	-47.7	-41.2	-6.5	-	-	157	161	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

20MHz

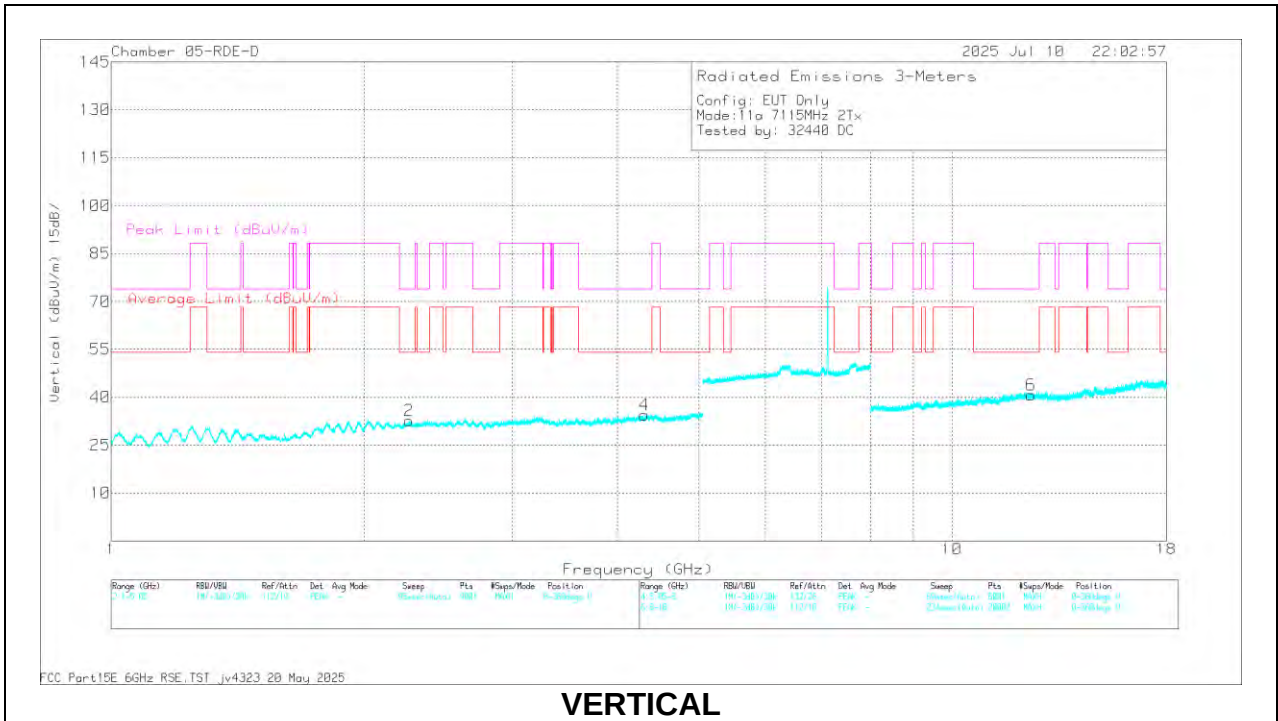
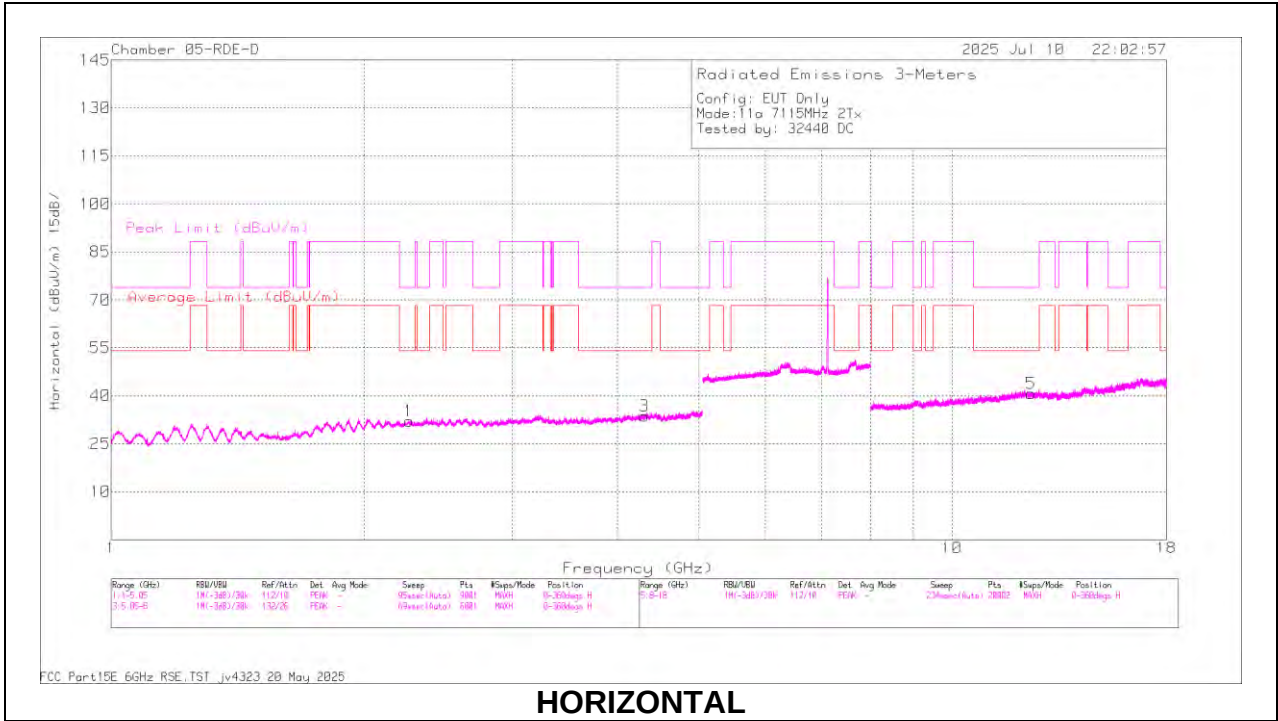
UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 2.259856	49.45	ADR	32.1	0	-50.93	30.62	54	-23.38	-	-	35	308	V
			* 2.261041	61.42	PK-U	32.1	0	-50.91	42.61	-	-	74	-31.39	35	308	V
			* 2.262351	61.05	PK-U	32.1	0	-50.91	42.24	-	-	74	-31.76	196	200	H
			* 2.262405	49.6	ADR	32.1	0	-50.92	30.78	54	-23.22	-	-	196	200	H
			* 4.308885	45.81	ADR	34.2	0	-47.56	32.45	54	-21.55	-	-	216	361	V
			* 4.309142	57.21	PK-U	34.2	0	-47.56	43.85	-	-	74	-30.15	216	361	V
			* 4.309751	45.65	ADR	34.2	0	-47.58	32.27	54	-21.73	-	-	299	209	H
			* 4.310521	57.57	PK-U	34.2	0	-47.58	44.19	-	-	74	-29.81	299	209	H
			* 12.419735	43.5	ADR	39	0	-44.14	38.36	54	-15.64	-	-	278	135	H
			* 12.421604	55.04	PK-U	39	0	-44.18	49.86	-	-	74	-24.14	278	135	H
			* 12.422201	54.97	PK-U	39	0	-44.2	49.77	-	-	74	-24.23	259	174	V
			* 12.423151	43.48	ADR	39	0	-44.19	38.29	54	-15.71	-	-	259	174	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.259856	49.45	ADR	32.1	0	-50.93	30.62	54	-23.38	-	-	35	308	V
	* 2.261041	61.42	PK-U	32.1	0	-50.91	42.61	-	-	74	-31.39	35	308	V
2	* 2.262351	61.05	PK-U	32.1	0	-50.91	42.24	-	-	74	-31.76	196	200	H
	* 2.262405	49.6	ADR	32.1	0	-50.92	30.78	54	-23.22	-	-	196	200	H
3	* 4.308885	45.81	ADR	34.2	0	-47.56	32.45	54	-21.55	-	-	216	361	V
	* 4.309142	57.21	PK-U	34.2	0	-47.56	43.85	-	-	74	-30.15	216	361	V
4	* 4.309751	45.65	ADR	34.2	0	-47.58	32.27	54	-21.73	-	-	299	209	H
	* 4.310521	57.57	PK-U	34.2	0	-47.58	44.19	-	-	74	-29.81	299	209	H
5	* 12.41973	43.5	ADR	39	0	-44.14	38.36	54	-15.64	-	-	278	135	H
	* 12.42160	55.04	PK-U	39	0	-44.18	49.86	-	-	74	-24.14	278	135	H
6	* 12.42201	54.97	PK-U	39	0	-44.2	49.77	-	-	74	-24.23	259	174	V
	* 12.42315	43.48	ADR	39	0	-44.19	38.29	54	-15.71	-	-	259	174	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

20MHz

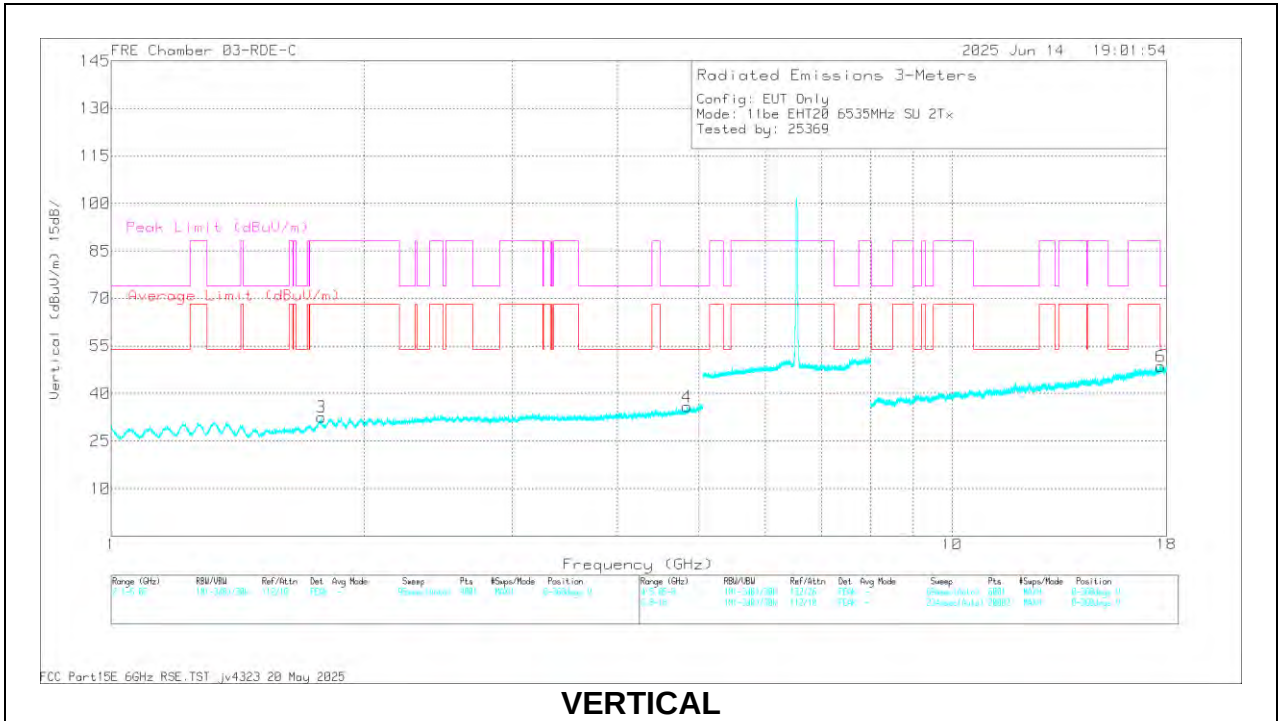
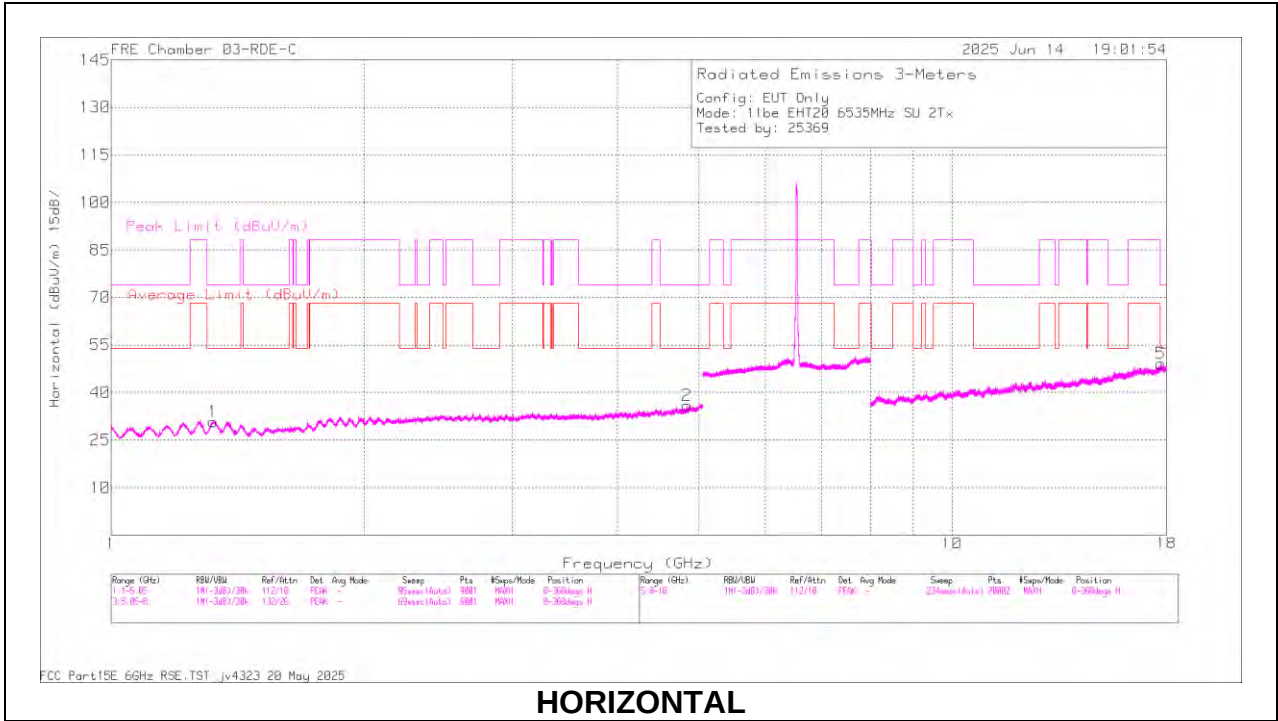
UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Ftr /Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115	6 + 5	* 1.327375	60.11	PK-U	29.3	0	-48.31	41.1	-	-	74	-32.9	0	101	H
			* 1.327744	48.53	ADR	29.3	0	-48.3	29.53	54	-24.47	-	-	0	101	H
			* 1.219597	60.09	PK-U	28.9	0	-48.47	40.52	-	-	74	-33.48	0	200	V
			* 1.221395	48.53	ADR	29	0	-48.46	29.07	54	-24.93	-	-	0	200	V
			* 4.874087	57.39	PK-U	34.4	0	-46.5	45.29	-	-	74	-28.71	0	101	V
			* 4.873227	45.77	ADR	34.4	0	-46.53	33.64	54	-20.36	-	-	0	101	V
			* 12.414083	55.3	PK-U	38.9	0	-42.68	51.52	-	-	74	-22.48	0	199	H
			* 12.411669	43.8	ADR	38.9	0	-42.69	40.01	54	-13.99	-	-	0	199	H
			4.456771	45.75	ADR	33.9	0	-46.67	32.98	68.2	-35.22	-	-	0	200	H
			4.458198	57.32	PK-U	33.9	0	-46.69	44.53	-	-	88.2	-43.67	0	200	H
			12.905921	45.63	ADR	39.3	0	-44.37	40.56	68.2	-27.64	-	-	0	199	V
			12.907923	57.38	PK-U	39.3	0	-44.36	52.32	-	-	88.2	-35.88	0	199	V
	6535	6 + 5	* 1.321099	60.02	PK-U	29.3	0	-48.29	41.03	-	-	74	-32.97	0	199	H
			* 1.322298	48.67	ADR	29.3	0	-48.29	29.68	54	-24.32	-	-	0	199	H
			* 4.84072	57.31	PK-U	34.4	0	-46.78	44.93	-	-	74	-29.07	0	101	H
			* 4.843132	45.97	ADR	34.4	0	-46.78	33.59	54	-20.41	-	-	0	101	H
			* 4.836026	57.3	PK-U	34.4	0	-46.75	44.95	-	-	74	-29.05	0	101	V
			* 4.838864	45.9	ADR	34.4	0	-46.79	33.51	54	-20.49	-	-	0	101	V
			* 17.734101	59.06	PK-U	41.6	0	-42.65	58.01	-	-	74	-15.99	0	101	H
			* 17.737306	47.21	ADR	41.6	0	-42.57	46.24	54	-7.76	-	-	0	101	H
			* 17.734838	58.97	PK-U	41.6	0	-42.62	57.95	-	-	74	-16.05	0	200	V
			* 17.732991	47.15	ADR	41.6	0	-42.66	46.09	54	-7.91	-	-	0	200	V
			1.777403	59.33	PK-U	30.3	0	-48.41	41.22	-	-	88.2	-46.98	0	101	V
			1.77782	47.8	ADR	30.3	0	-48.42	29.68	68.2	-38.52	-	-	0	101	V
	7095	6 + 5	1.816859	57.16	PK-U	30.2	0	-46.4	40.96	-	-	88.2	-47.24	193	338	H
			1.816743	45.67	ADR	30.2	0	-46.4	29.47	68.2	-38.73	-	-	193	338	H
			* 3.521537	55.32	PK-U	33	0	-45.15	43.17	-	-	88.2	-45.03	208	361	H
			* 3.523912	43.64	ADR	33	0	-45.11	31.53	68.2	-36.67	-	-	208	361	H
			1.814952	57.46	PK-U	30.2	0	-46.5	41.16	-	-	88.2	-47.04	325	292	V
			1.814701	46.01	ADR	30.2	0	-46.5	29.71	68.2	-38.49	-	-	325	292	V
			* 3.519339	55.05	PK-U	33	0	-45.2	42.85	-	-	88.2	-45.35	256	244	V
			* 3.517676	43.64	ADR	33	0	-45.13	31.51	68.2	-36.69	-	-	256	244	V
			* 12.506357	53.19	PK-U	38.6	0	-41.3	50.49	-	-	74	-23.51	256	199	H
			* 12.507658	41.4	ADR	38.6	0	-41.23	38.77	54	-15.23	-	-	256	199	H
			* 12.50956	53.15	PK-U	38.6	0	-41.24	50.51	-	-	74	-23.49	256	101	V
			* 12.512201	41.42	ADR	38.6	0	-41.28	38.74	54	-15.26	-	-	256	101	V
11be (Partial RU Mode / Highest PSD)	6115 (106+26T)	6 + 5	2.170252	57.54	PK-U	31.7	0	-46.67	42.57	-	-	88.2	-45.63	0	101	H
			2.170833	45.58	ADR	31.7	0	-46.62	30.66	68.2	-37.54	-	-	0	101	H
			2.172766	57.18	PK-U	31.7	0	-46.6	42.28	-	-	88.2	-45.92	0	101	V
			2.172644	45.6	ADR	31.7	0	-46.6	30.7	68.2	-37.5	-	-	0	101	V
			* 10.644917	54.13	PK-U	37.9	0	-42.08	49.95	-	-	74	-24.05	0	101	H
			* 10.642688	42.38	ADR	37.9	0	-42	38.28	54	-15.72	-	-	0	101	H
			15.315021	54.76	PK-U	40.3	0	-42.1	52.96	-	-	88.2	-35.24	0	101	H
			15.315867	43.47	ADR	40.3	0	-42.19	41.58	68.2	-26.62	-	-	0	101	H
			* 10.644297	53.79	PK-U	37.9	0	-41.96	49.73	-	-	74	-24.27	0	101	V
			* 10.645555	42.52	ADR	37.9	0	-42.1	38.32	54	-15.68	-	-	0	101	V
			15.314497	54.94	PK-U	40.3	0	-42.1	53.14	-	-	88.2	-35.06	0	101	V
			15.314398	43.65	ADR	40.3	0	-42.1	41.85	68.2	-26.35	-	-	0	101	V
	6535 (106+26T)	6 + 5	2.183387	63.38	PK-U	31.7	0	-50.35	44.73	-	-	88.2	-43.47	0	101	H
			2.171282	49.32	ADR	31.7	0	-50.34	30.68	68.2	-37.52	-	-	0	101	H
			2.177456	60.88	PK-U	31.7	0	-50.38	42.2	-	-	88.2	-46	0	101	V
			2.173487	49.28	ADR	31.7	0	-50.34	30.64	68.2	-37.56	-	-	0	101	V
			* 10.670206	56.74	PK-U	37.7	0	-45.64	48.8	-	-	74	-25.2	0	101	H
			* 10.675034	45.33	ADR	37.7	0	-45.7	37.33	54	-16.67	-	-	0	101	H
			* 15.407381	54.33	PK-U	40.7	0	-42.58	52.45	-	-	74	-21.55	0	101	H
			15.403817	42.76	ADR	40.7	0	-42.58	40.88	54	-13.12	-	-	0	101	H
			* 10.678449	57.12	PK-U	37.7	0	-45.62	49.2	-	-	74	-24.8	0	101	V
			* 10.678873	45.6	ADR	37.7	0	-45.64	37.66	54	-16.34	-	-	0	101	V
			* 15.41408	55.17	PK-U	40.8	0	-42.6	53.37	-	-	74	-20.63	0	101	V
			* 15.411633	42.99	ADR	40.8	0	-42.61	41.18	54	-12.82	-	-	0	101	V
	7095 (52+26T)	6 + 5	1.714014	56.7	PK-U	29.4	0	-46.3	39.8	-	-	88.2	-48.4	119	202	H
			1.71533	44.48	ADR	29.4	0	-46.33	27.55	68.2	-40.65	-	-	119	202	H
			3.311799	55.07	PK-U	32.8	0	-45.08	42.79	-	-	88.2	-45.41	121	220	H
			3.314521	43.76	ADR	32.8	0	-45.2	31.36	68.2	-36.84	-	-	121	220	H
			1.711492	55.93	PK-U	29.3	0	-46.35	38.88	-	-	88.2	-49.32	227	104	V
			1.714472	44.71	ADR	29.4	0	-46.3	27.81	68.2	-40.39	-	-	227	104	V
			3.312826	55.1	PK-U	32.8	0	-45.1	42.8	-	-	88.2	-45.4	218	177	V
			3.313508	43.71	ADR	32.8	0	-45.15	31.36	68.2	-36.84	-	-	218	177	V
			10.320317	53.87	PK-U	37.8	0	-41.9	49.77	-	-	88.2	-38.43	218	200	H
			10.318035	42.15	ADR	37.8	0	-41.9	38.05	68.2	-30.15	-	-	218	200	H
			10.318008	53.41	PK-U	37.8	0	-41.9	49.31	-	-	88.2	-38.89	218	101	V
			10.31888	41.92	ADR	37.8	0	-41.9	37.82	68.2	-30.38	-	-	218	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6535MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.321099	60.02	PK-U	29.3	0	-48.29	41.03	-	-	74	-32.97	0	199	H
	* 1.322298	48.67	ADR	29.3	0	-48.29	29.68	54	-24.32	-	-	0	199	H
2	* 4.84072	57.31	PK-U	34.4	0	-46.78	44.93	-	-	74	-29.07	0	101	H
	* 4.843132	45.97	ADR	34.4	0	-46.78	33.59	54	-20.41	-	-	0	101	H
4	* 4.836026	57.3	PK-U	34.4	0	-46.75	44.95	-	-	74	-29.05	0	101	V
	* 4.838864	45.9	ADR	34.4	0	-46.79	33.51	54	-20.49	-	-	0	101	V
5	* 17.73410	59.06	PK-U	41.6	0	-42.65	58.01	-	-	74	-15.99	0	101	H
	* 17.73730	47.21	ADR	41.6	0	-42.57	46.24	54	-7.76	-	-	0	101	H
6	* 17.73483	58.97	PK-U	41.6	0	-42.62	57.95	-	-	74	-16.05	0	200	V
	* 17.73299	47.15	ADR	41.6	0	-42.66	46.09	54	-7.91	-	-	0	200	V
3	1.777403	59.33	PK-U	30.3	0	-48.41	41.22	-	-	88.2	-46.98	0	101	V
	1.77782	47.8	ADR	30.3	0	-48.42	29.68	68.2	-38.52	-	-	0	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

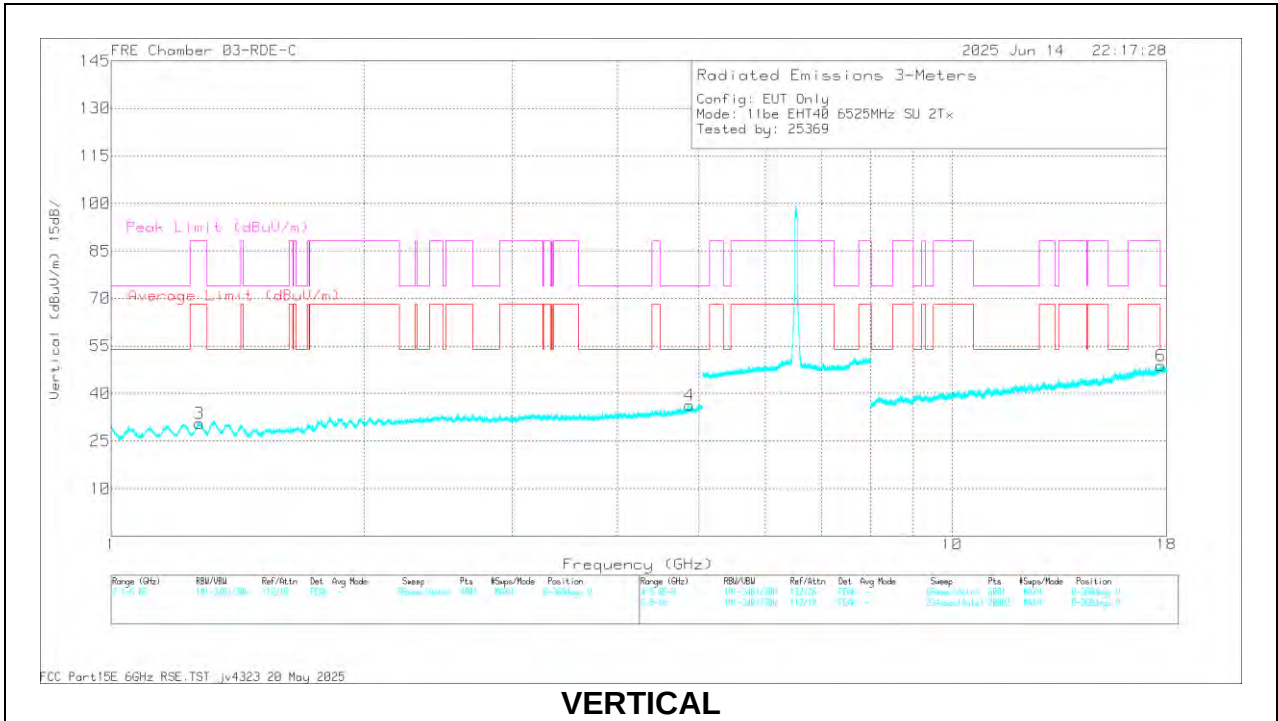
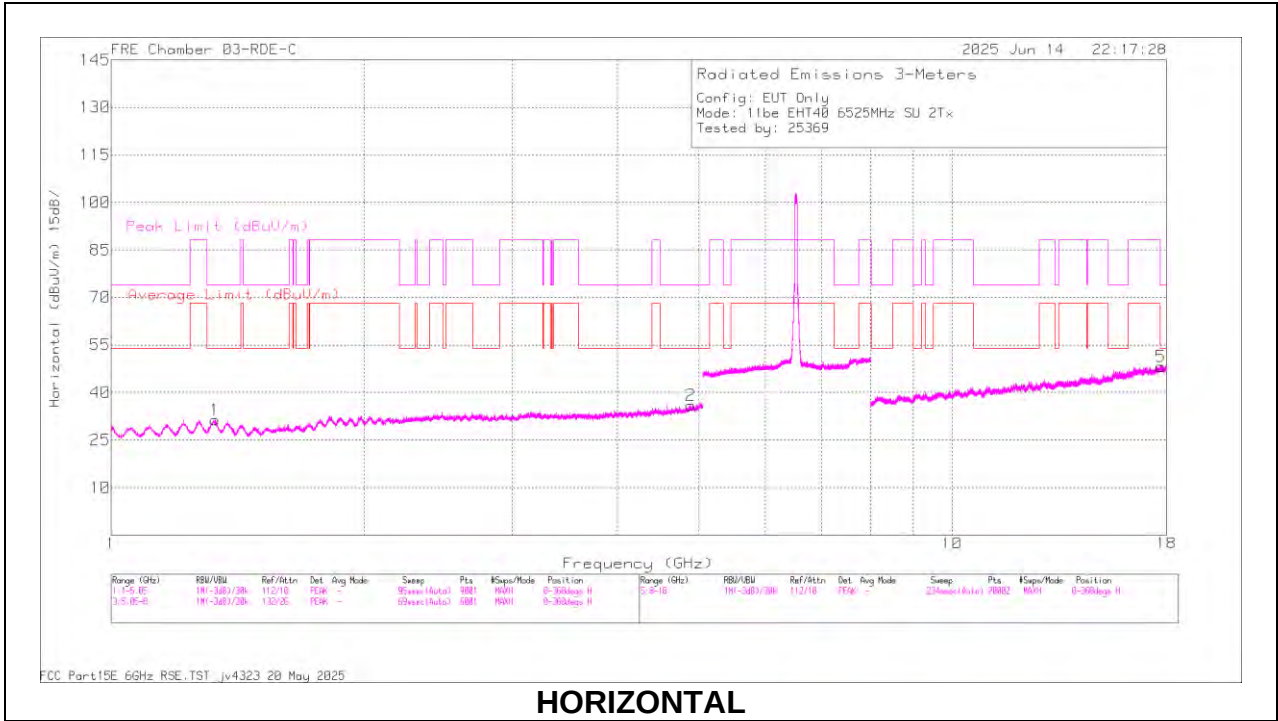
UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Rtr /Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125	6 + 5	* 1.212473	59.76	PK-U	28.8	0	-48.46	40.1	-	-	74	-33.9	0	101	H
			* 1.212396	48.4	ADR	28.8	0	-48.46	28.74	54	-25.26	-	-	0	101	H
			* 4.670217	56.91	PK-U	34.1	0	-46.91	44.1	-	-	74	-29.9	0	199	H
			* 4.668203	45.56	ADR	34.1	0	-46.91	32.75	54	-21.25	-	-	0	199	H
			* 1.222322	59.98	PK-U	29	0	-48.46	40.52	-	-	74	-33.48	0	101	V
			* 1.221013	48.56	ADR	29	0	-48.46	29.1	54	-24.9	-	-	0	101	V
			* 4.861725	57.63	PK-U	34.4	0	-46.58	45.45	-	-	74	-28.55	0	101	V
			* 4.862069	45.7	ADR	34.4	0	-46.57	33.53	54	-20.47	-	-	0	101	V
			* 15.664463	58.18	PK-U	40.3	0	-42.71	55.77	-	-	74	-18.23	0	101	V
			* 15.662675	46.2	ADR	40.3	0	-42.64	43.86	54	-10.14	-	-	0	101	V
			16.66428	45.99	ADR	41.4	0	-42.09	45.3	68.2	-22.9	-	-	0	101	H
			16.664523	57.94	PK-U	41.4	0	-42.09	57.25	-	-	88.2	-30.95	0	101	H
			* 1.328668	60.5	PK-U	29.3	0	-48.29	41.51	-	-	74	-32.49	0	101	H
			* 1.326768	48.65	ADR	29.3	0	-48.31	29.64	54	-24.36	-	-	0	101	H
			* 4.895346	57.55	PK-U	34.3	0	-46.45	45.4	-	-	74	-28.6	0	101	H
	6525	6 + 5	* 4.892528	46.23	ADR	34.3	0	-46.47	34.06	54	-19.94	-	-	0	101	H
			* 1.271641	60.17	PK-U	29.3	0	-48.32	41.15	-	-	88.2	-47.05	0	101	V
			* 1.273646	48.46	ADR	29.4	0	-48.32	29.54	68.2	-38.66	-	-	0	101	V
			* 4.873583	57.45	PK-U	34.4	0	-46.52	45.33	-	-	74	-28.67	0	199	V
			* 4.872341	45.77	ADR	34.4	0	-46.55	33.62	54	-20.38	-	-	0	199	V
			* 17.72662	58.98	PK-U	41.6	0	-42.87	57.71	-	-	74	-16.29	0	101	H
			* 17.72915	47.44	ADR	41.6	0	-42.77	46.27	54	-7.73	-	-	0	101	H
			* 17.72710	59.32	PK-U	41.6	0	-42.84	58.08	-	-	74	-15.92	0	101	V
			* 17.72893	47.61	ADR	41.6	0	-42.77	46.44	54	-7.56	-	-	0	101	V
			* 1.325645	60.46	PK-U	29.3	0	-48.3	41.46	-	-	74	-32.54	1	199	H
			* 1.326533	48.7	ADR	29.3	0	-48.31	29.69	54	-24.31	-	-	1	199	H
			* 5.024432	57.45	PK-U	34.4	0	-45.5	46.35	-	-	74	-27.65	1	101	H
			* 5.023313	45.91	ADR	34.4	0	-45.51	34.8	54	-19.2	-	-	1	101	H
			* 1.32543	60.08	PK-U	29.3	0	-48.3	41.08	-	-	74	-32.92	1	101	V
			* 1.323333	48.67	ADR	29.3	0	-48.29	29.68	54	-24.32	-	-	1	101	V
11be (Partial RU Mode / Highest PSD)	6125 (242T)	6 + 5	* 5.030336	57.51	PK-U	34.4	0	-45.45	46.46	-	-	74	-27.54	1	101	V
			* 5.0295	45.71	ADR	34.4	0	-45.46	34.65	54	-19.35	-	-	1	101	V
			* 17.741027	58.57	PK-U	41.6	0	-42.58	57.59	-	-	74	-16.41	1	101	H
			* 17.741632	47.36	ADR	41.6	0	-42.58	46.38	54	-7.62	-	-	1	101	H
			* 17.749479	58.99	PK-U	41.6	0	-42.76	57.83	-	-	74	-16.17	1	101	V
			* 17.752375	47.55	ADR	41.6	0	-42.79	46.36	54	-7.64	-	-	1	101	V
			* 2.21543	60.87	PK-U	31.8	0	-50.29	42.38	-	-	74	-31.62	0	101	H
			* 2.213604	49.51	ADR	31.8	0	-50.31	31	54	-23	-	-	0	101	H
			* 2.205512	61.4	PK-U	31.8	0	-50.24	42.96	-	-	74	-31.04	0	101	V
			* 2.210027	49.38	ADR	31.8	0	-50.31	30.87	54	-23.13	-	-	0	101	V
			10.582318	56.35	PK-U	37.8	0	-45.77	48.38	-	-	88.2	-39.82	0	101	H
			10.584374	44.68	ADR	37.8	0	-45.79	36.69	68.2	-31.51	-	-	0	101	H
			* 15.373271	54.15	PK-U	40.6	0	-41.93	52.82	-	-	74	-21.18	0	101	H
			* 15.377347	42.89	ADR	40.7	0	-42.03	41.56	54	-12.44	-	-	0	101	H
			10.566568	56.31	PK-U	37.8	0	-45.68	48.43	-	-	88.2	-39.77	0	101	V
			10.586194	44.77	ADR	37.8	0	-45.79	36.78	68.2	-31.42	-	-	0	101	V
	6525 (106+26T)	6 + 5	* 15.376535	54.32	PK-U	40.7	0	-42.02	53	-	-	74	-21	0	101	V
			* 15.38801	42.72	ADR	40.7	0	-42.18	41.24	54	-12.76	-	-	0	101	V
			* 1.6713	61.4	PK-U	29	0	-48.78	41.62	-	-	74	-32.38	221	207	H
			* 1.669562	49.89	ADR	29	0	-48.81	30.08	54	-23.92	-	-	221	207	H
			* 1.674004	63.24	PK-U	29	0	-48.82	43.42	-	-	74	-30.58	284	203	V
			* 1.686922	50.02	ADR	29.1	0	-48.89	30.23	54	-23.77	-	-	284	203	V
			* 9.376409	58.69	PK-U	36.5	0	-44.96	50.23	-	-	74	-23.77	139	138	H
			* 9.409642	46.47	ADR	36.6	0	-44.45	38.62	54	-15.38	-	-	139	138	H
			* 15.844108	59.21	PK-U	40.6	0	-43.33	56.48	-	-	74	-17.52	344	228	H
			* 15.837473	47.37	ADR	40.6	0	-43.46	44.51	54	-9.49	-	-	344	228	H
			* 9.395853	58.36	PK-U	36.6	0	-44.81	50.15	-	-	74	-23.85	205	334	V
			* 9.410975	46.65	ADR	36.6	0	-44.49	38.76	54	-15.24	-	-	205	334	V
			* 15.832142	59.28	PK-U	40.6	0	-43.32	56.56	-	-	74	-17.44	12	290	V
			* 15.84828	47.4	ADR	40.6	0	-43.38	44.62	54	-9.38	-	-	12	290	V
	7085 (106T)	6 + 5	1.637212	57.23	PK-U	28.6	0	-46.24	39.59	-	-	88.2	-48.61	0	339	H
			1.638309	45.61	ADR	28.6	0	-46.37	27.84	68.2	-40.36	-	-	0	339	H
			* 3.691027	56.48	PK-U	33.3	0	-45.4	44.38	-	-	74	-29.62	53	228	H
			* 3.69053	44.4	ADR	33.3	0	-45.4	32.3	54	-21.7	-	-	53	228	H
			1.630668	57.46	PK-U	28.6	0	-46.3	39.76	-	-	88.2	-48.44	132	184	V
			1.631853	45.93	ADR	28.6	0	-46.3	28.23	68.2	-39.97	-	-	132	184	V
			* 3.692186	55.82	PK-U	33.3	0	-45.4	43.72	-	-	74	-30.28	135	315	V
			* 3.691964	44.52	ADR	33.3	0	-45.4	32.42	54	-21.58	-	-	135	315	V
			14.351663	54.68	PK-U	39.2	0	-42.37	51.51	-	-	88.2	-36.69	135	200	H
			14.351389	43.22	ADR	39.2	0	-42.34	40.08	68.2	-28.12	-	-	135	200	H
			14.348893	54.72	PK-U	39.2	0	-42.32	51.6	-	-	88.2	-36.6	135	200	V
			14.348199	42.97	ADR	39.2	0	-42.46	39.71	68.2	-28.49	-	-	135	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6525MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.328668	60.5	PK-U	29.3	0	-48.29	41.51	-	-	74	-32.49	0	101	H
	* 1.326768	48.65	ADR	29.3	0	-48.31	29.64	54	-24.36	-	-	0	101	H
2	* 4.895346	57.55	PK-U	34.3	0	-46.45	45.4	-	-	74	-28.6	0	101	H
	* 4.892528	46.23	ADR	34.3	0	-46.47	34.06	54	-19.94	-	-	0	101	H
3	* 1.271641	60.17	PK-U	29.3	0	-48.32	41.15	-	-	88.2	-47.05	0	101	V
	* 1.273646	48.46	ADR	29.4	0	-48.32	29.54	68.2	-38.66	-	-	0	101	V
4	* 4.873583	57.45	PK-U	34.4	0	-46.52	45.33	-	-	74	-28.67	0	199	V
	* 4.872341	45.77	ADR	34.4	0	-46.55	33.62	54	-20.38	-	-	0	199	V
5	* 17.72662	58.98	PK-U	41.6	0	-42.87	57.71	-	-	74	-16.29	0	101	H
	* 17.72915	47.44	ADR	41.6	0	-42.77	46.27	54	-7.73	-	-	0	101	H
6	* 17.72710	59.32	PK-U	41.6	0	-42.84	58.08	-	-	74	-15.92	0	101	V
	* 17.72893	47.61	ADR	41.6	0	-42.77	46.44	54	-7.56	-	-	0	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

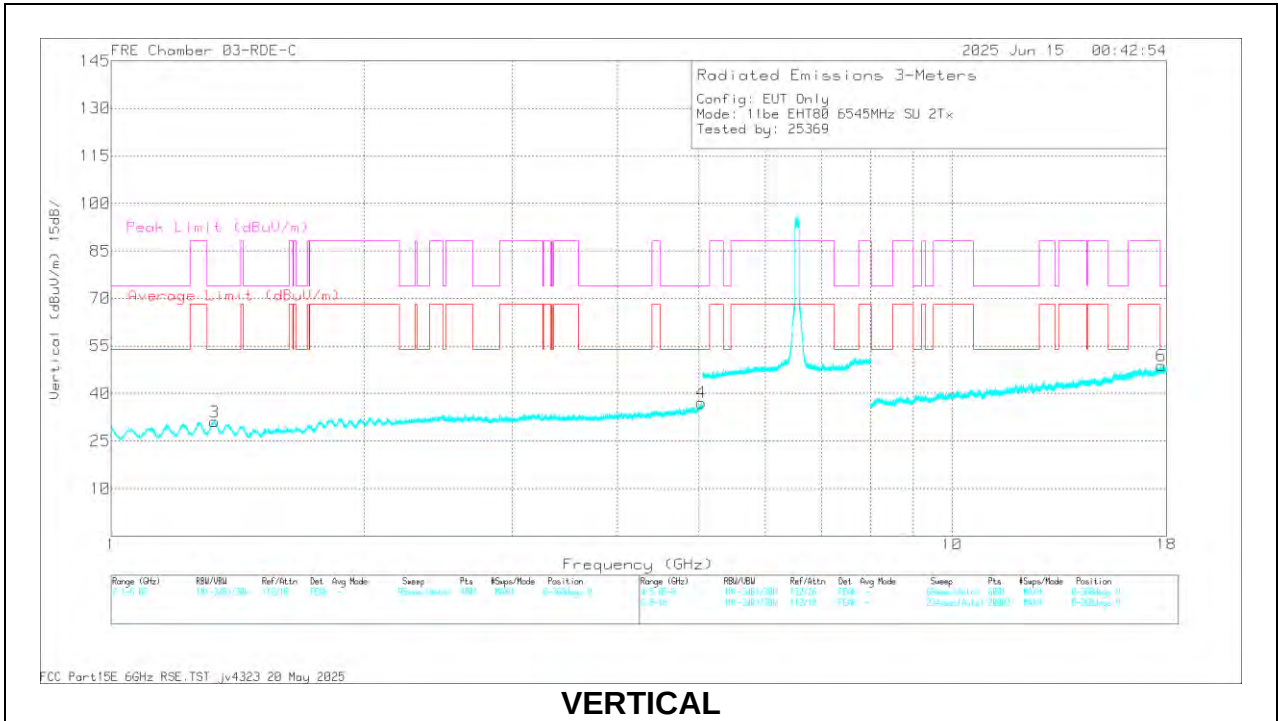
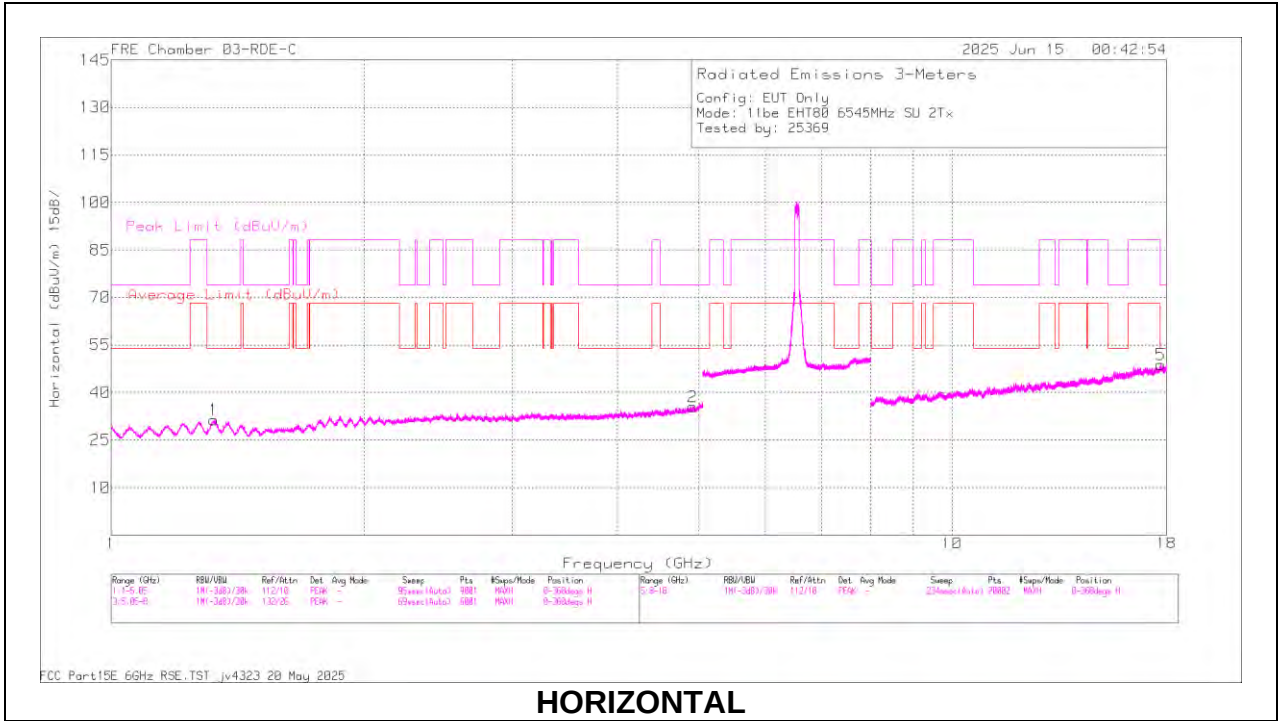
UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	DOCF (dB)	Amp/Cbl/Rtr /Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145	6 + 5	* 1.273678	60.5	PK-U	29.4	0	-48.32	41.58	-	-	88.2	-46.62	0	101	H
			* 1.273764	48.52	ADR	29.4	0	-48.32	29.6	68.2	-38.6	-	-	0	101	H
			* 5.012913	58.09	PK-U	34.4	0	-45.57	46.92	-	-	74	-27.08	0	101	H
			* 5.011696	46.19	ADR	34.4	0	-45.58	35.01	54	-18.99	-	-	0	101	H
			* 1.326074	60.47	PK-U	29.3	0	-48.31	41.46	-	-	74	-32.54	0	199	V
			* 1.324757	48.78	ADR	29.3	0	-48.29	29.79	54	-24.21	-	-	0	199	V
			* 4.883325	57.9	PK-U	34.3	0	-46.5	45.7	-	-	74	-28.3	0	199	V
			* 4.882925	46.17	ADR	34.3	0	-46.49	33.98	54	-20.02	-	-	0	199	V
			* 17.737819	58.87	PK-U	41.6	0	-42.56	57.91	-	-	74	-16.09	0	101	H
			* 17.735712	47.2	ADR	41.6	0	-42.61	46.19	54	-7.81	-	-	0	101	H
			* 17.734475	59.18	PK-U	41.6	0	-42.64	58.14	-	-	74	-15.86	0	199	V
			* 17.737969	47.41	ADR	41.6	0	-42.56	46.45	54	-7.55	-	-	0	199	V
	6545	6 + 5	* 1.327294	60.83	PK-U	29.3	0	-48.31	41.82	-	-	74	-32.18	0	101	H
			* 1.327298	48.58	ADR	29.3	0	-48.31	29.57	54	-24.43	-	-	0	101	H
			* 4.9184	57.95	PK-U	34.4	0	-46.42	45.93	-	-	74	-28.07	0	199	H
			* 4.917588	45.45	ADR	34.4	0	-46.42	33.43	54	-20.57	-	-	0	199	H
			* 1.327953	60.24	PK-U	29.3	0	-48.3	41.24	-	-	74	-32.76	0	101	V
			* 1.32874	48.76	ADR	29.3	0	-48.29	29.77	54	-24.23	-	-	0	101	V
			* 5.035635	57.51	PK-U	34.4	0	-45.41	46.5	-	-	74	-27.5	0	101	V
			* 5.033061	45.66	ADR	34.4	0	-45.43	34.63	54	-19.37	-	-	0	101	V
			* 17.732934	59.49	PK-U	41.6	0	-42.66	58.43	-	-	74	-15.57	0	199	H
			* 17.732952	47.51	ADR	41.6	0	-42.66	46.45	54	-7.55	-	-	0	199	H
			* 17.743709	59.04	PK-U	41.6	0	-42.63	58.01	-	-	74	-15.99	0	101	V
			* 17.742248	47.69	ADR	41.6	0	-42.59	46.7	54	-7.3	-	-	0	101	V
	7025	6 + 5	* 1.32611	60.16	PK-U	29.3	0	-48.31	41.15	-	-	74	-32.85	0	198	H
			* 1.326986	48.6	ADR	29.3	0	-48.31	29.59	54	-24.41	-	-	0	198	H
			* 5.012178	58.62	PK-U	34.4	0	-45.58	47.44	-	-	74	-26.56	0	101	H
			* 5.010021	45.85	ADR	34.4	0	-45.6	34.65	54	-19.35	-	-	0	101	H
			* 1.326531	60.22	PK-U	29.3	0	-48.31	41.21	-	-	74	-32.79	0	101	V
			* 1.325242	48.65	ADR	29.3	0	-48.29	29.66	54	-24.34	-	-	0	101	V
			* 4.993007	57.63	PK-U	34.4	0	-45.92	46.11	-	-	74	-27.89	0	101	V
			* 4.992111	45.73	ADR	34.4	0	-45.93	34.2	54	-19.8	-	-	0	101	V
			* 17.749928	58.88	PK-U	41.6	0	-42.77	57.71	-	-	74	-16.29	0	101	H
			* 17.74953	47.49	ADR	41.6	0	-42.76	46.33	54	-7.67	-	-	0	101	H
			* 17.739709	58.81	PK-U	41.6	0	-42.56	57.85	-	-	74	-16.15	0	200	V
			* 17.742666	47.49	ADR	41.6	0	-42.61	46.48	54	-7.52	-	-	0	200	V
11be (Partial RU Mode / Highest PSD)	6145 (106+26T)	6 + 5	* 1.544095	61.11	PK-U	28.3	0	-48.72	40.69	-	-	74	-33.31	65	187	H
			* 1.540793	49.54	ADR	28.3	0	-48.67	29.17	54	-24.83	-	-	65	187	H
			* 1.534625	61.71	PK-U	28.2	0	-48.64	41.27	-	-	74	-32.73	250	231	V
			* 1.532657	49.3	ADR	28.2	0	-48.55	28.95	54	-25.05	-	-	250	231	V
			* 9.424597	58.73	PK-U	36.6	0	-44.57	50.76	-	-	74	-23.24	71	202	H
			* 9.419738	46.65	ADR	36.6	0	-44.87	38.38	54	-15.62	-	-	71	202	H
			* 15.73846	59.66	PK-U	40.6	0	-43.05	57.21	-	-	74	-16.79	357	208	H
			* 15.743024	47.12	ADR	40.6	0	-43.2	44.52	54	-9.48	-	-	357	208	H
			* 9.414341	58.57	PK-U	36.6	0	-44.71	50.46	-	-	74	-23.54	226	396	V
			* 9.426172	46.75	ADR	36.6	0	-44.45	38.9	54	-15.1	-	-	226	396	V
			* 15.765174	58.8	PK-U	40.6	0	-43.18	56.22	-	-	74	-17.78	312	101	V
			* 15.762994	47.45	ADR	40.6	0	-43.3	44.75	54	-9.25	-	-	312	101	V
	6545 (106+26T)	6 + 5	* 1.554783	61.17	PK-U	28.3	0	-48.58	40.89	-	-	74	-33.11	284	201	H
			* 1.53434	49.61	ADR	28.2	0	-48.65	29.16	54	-24.84	-	-	284	201	H
			* 1.518449	61.76	PK-U	28.1	0	-48.52	41.34	-	-	74	-32.66	167	187	V
			* 1.518893	50.59	ADR	28.1	0	-48.53	30.16	54	-23.84	-	-	167	187	V
			* 9.381597	58.14	PK-U	36.5	0	-44.78	49.86	-	-	74	-24.14	344	363	H
			* 9.381437	46.82	ADR	36.5	0	-44.8	38.52	54	-15.48	-	-	344	363	H
			* 15.796698	59.14	PK-U	40.6	0	-43.24	56.5	-	-	74	-17.5	103	284	H
			* 15.784863	47.19	ADR	40.6	0	-43.17	44.62	54	-9.38	-	-	103	284	H
			* 9.413832	58.7	PK-U	36.6	0	-44.72	50.58	-	-	74	-23.42	103	200	V
			* 9.409853	46.8	ADR	36.6	0	-44.43	38.97	54	-15.03	-	-	103	200	V
			* 15.765218	58.96	PK-U	40.6	0	-43.19	56.37	-	-	74	-17.63	356	111	V
			* 15.776345	47.34	ADR	40.6	0	-43.28	44.66	54	-9.34	-	-	356	111	V
	7025 (484T)	6 + 5	* 1.541341	57.65	PK-U	28.1	0	-46.3	39.45	-	-	74	-34.55	219	250	H
			* 1.538367	46.21	ADR	28.1	0.14	-46.3	28.15	54	-25.85	-	-	219	250	H
			* 3.560678	55.27	PK-U	33.1	0	-45.13	43.24	-	-	88.2	-44.96	100	155	H
			* 3.561337	43.86	ADR	33.1	0.14	-45.1	32	68.2	-36.2	-	-	100	155	H
			* 1.541683	57.57	PK-U	28.1	0	-46.3	39.37	-	-	74	-34.63	289	112	V
			* 1.543604	45.82	ADR	28.1	0.14	-46.2	27.86	54	-26.14	-	-	289	112	V
			* 3.561393	56.11	PK-U	33.1	0	-45.1	44.11	-	-	88.2	-44.09	345	285	V
			* 3.559508	43.92	ADR	33.1	0.14	-45.2	31.96	68.2	-36.24	-	-	345	285	V
			* 13.394426	54.04	PK-U	39.1	0	-41.84	51.3	-	-	74	-22.7	345	199	H
			* 13.396401	42.09	ADR	39.1	0.14	-42	39.33	54	-14.67	-	-	345	199	H
			13.486871	53.81	PK-U	39.1	0	-42.19	50.72	-	-	88.2	-37.48	345	199	V
			13.474273	42.83	ADR	39.1	0.14	-42.25	39.82	68.2	-28.38	-	-	345	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6545MHz)



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.327294	60.83	PK-U	29.3	0	-48.31	41.82	-	-	74	-32.18	0	101	H
	* 1.327298	48.58	ADR	29.3	0	-48.31	29.57	54	-24.43	-	-	0	101	H
2	* 4.9184	57.95	PK-U	34.4	0	-46.42	45.93	-	-	74	-28.07	0	199	H
	* 4.917588	45.45	ADR	34.4	0	-46.42	33.43	54	-20.57	-	-	0	199	H
3	* 1.327953	60.24	PK-U	29.3	0	-48.3	41.24	-	-	74	-32.76	0	101	V
	* 1.32874	48.76	ADR	29.3	0	-48.29	29.77	54	-24.23	-	-	0	101	V
4	* 5.035635	57.51	PK-U	34.4	0	-45.41	46.5	-	-	74	-27.5	0	101	V
	* 5.033061	45.66	ADR	34.4	0	-45.43	34.63	54	-19.37	-	-	0	101	V
5	* 17.73293	59.49	PK-U	41.6	0	-42.66	58.43	-	-	74	-15.57	0	199	H
	* 17.73295	47.51	ADR	41.6	0	-42.66	46.45	54	-7.55	-	-	0	199	H
6	* 17.74370	59.04	PK-U	41.6	0	-42.63	58.01	-	-	74	-15.99	0	101	V
	* 17.74224	47.69	ADR	41.6	0	-42.59	46.7	54	-7.3	-	-	0	101	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

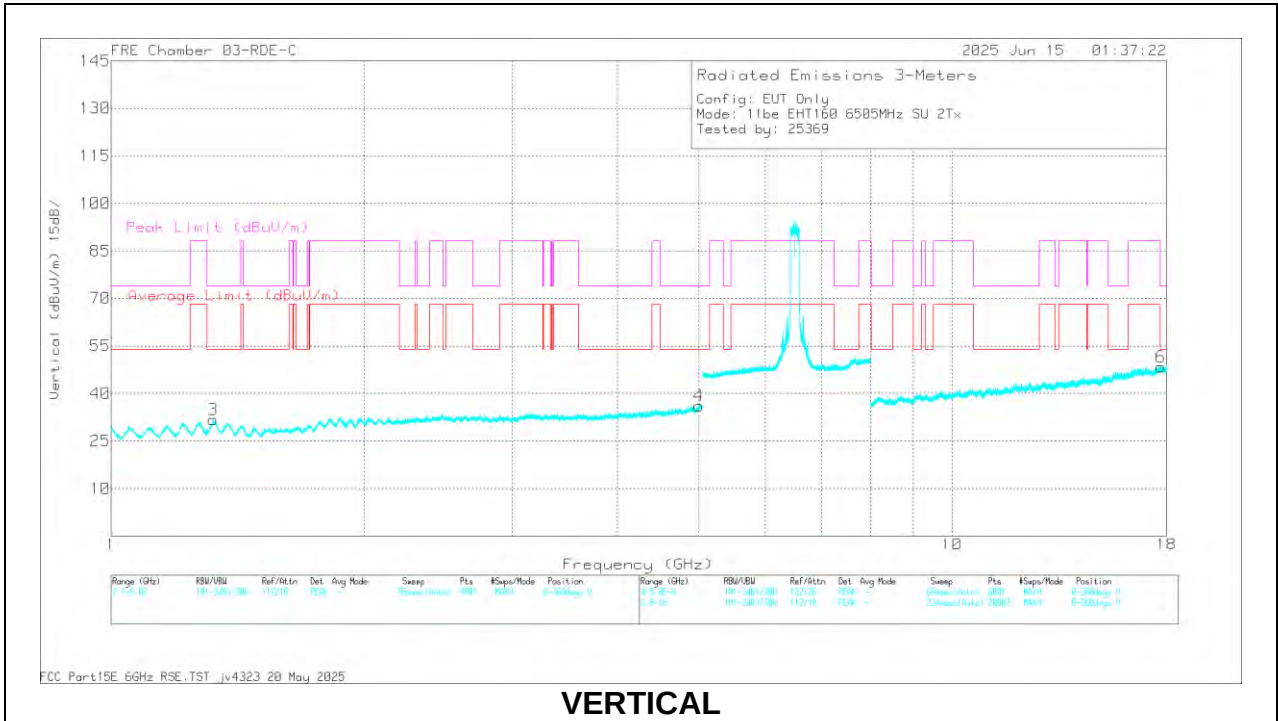
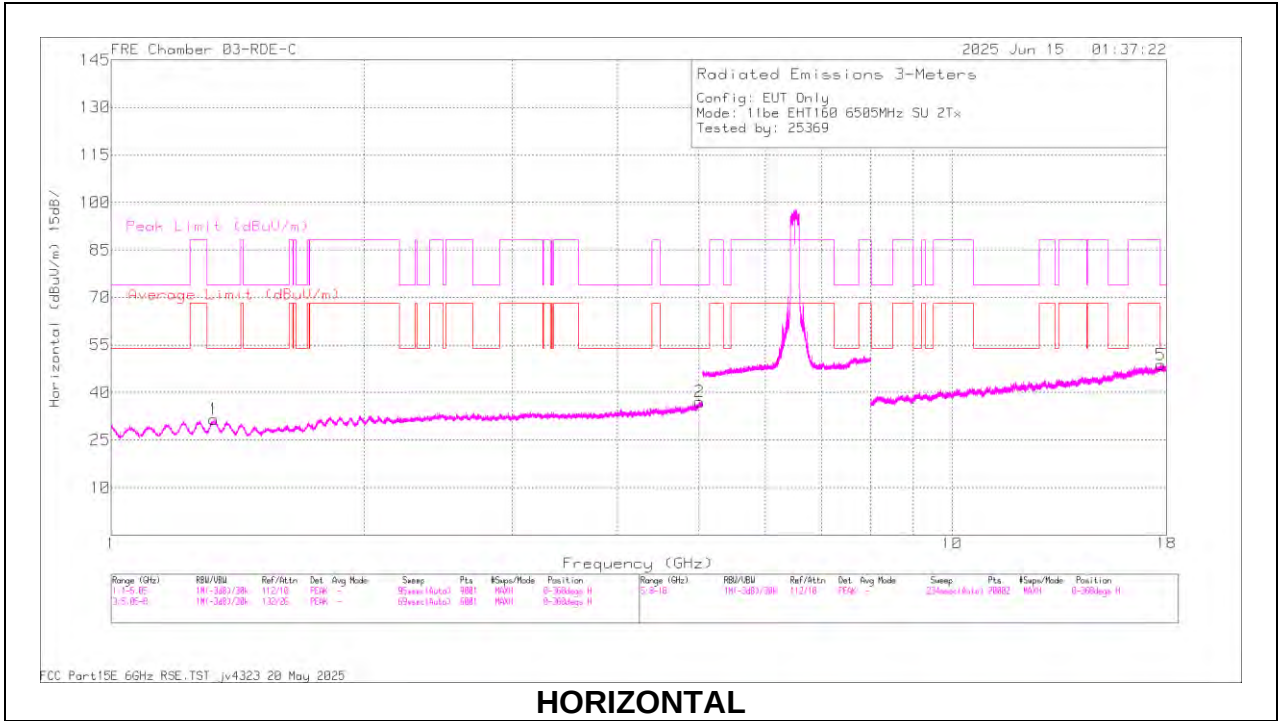
UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Ftr /Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185	6 + 5	* 1.222816	60.68	PK-U	29	0	-48.45	41.23	-	-	74	-32.77	0	101	H
			* 1.221467	48.82	ADR	29	0	-48.46	29.36	54	-24.64	-	-	0	101	H
			* 5.030662	57.61	PK-U	34.4	0	-45.46	46.55	-	-	74	-27.45	0	101	H
			* 5.030745	46.16	ADR	34.4	0	-45.46	35.1	54	-18.9	-	-	0	101	H
			* 1.215451	60.54	PK-U	28.9	0	-48.46	40.98	-	-	74	-33.02	0	101	V
			* 1.215158	48.68	ADR	28.9	0	-48.46	29.12	54	-24.88	-	-	0	101	V
			* 5.01345	57.64	PK-U	34.4	0	-45.56	46.48	-	-	74	-27.52	0	101	V
			* 5.014322	46.32	ADR	34.4	0	-45.53	35.19	54	-18.81	-	-	0	101	V
			* 17.731185	59.15	PK-U	41.6	0	-42.73	58.02	-	-	74	-15.98	0	101	H
			* 17.730993	47.4	ADR	41.6	0	-42.73	46.27	54	-7.73	-	-	0	101	H
			* 17.757649	59.08	PK-U	41.6	0	-43	57.68	-	-	74	-16.32	0	101	V
			* 17.76141	47.8	ADR	41.6	0	-43.13	46.27	54	-7.73	-	-	0	101	V
	6505	6 + 5	* 1.325359	60.76	PK-U	29.3	0	-48.3	41.76	-	-	74	-32.24	0	101	H
			* 1.325998	48.83	ADR	29.3	0	-48.31	29.82	54	-24.18	-	-	0	101	H
			* 5.008117	57.52	PK-U	34.4	0	-45.6	46.32	-	-	74	-27.68	0	101	H
			* 5.010058	46.31	ADR	34.4	0	-45.6	35.11	54	-18.89	-	-	0	101	H
			* 1.324343	60.47	PK-U	29.3	0	-48.28	41.49	-	-	74	-32.51	0	101	V
			* 1.322197	48.88	ADR	29.3	0	-48.29	29.89	54	-24.11	-	-	0	101	V
			* 5.001955	58.01	PK-U	34.4	0	-45.7	46.71	-	-	74	-27.29	0	101	V
			* 5.002934	46.32	ADR	34.4	0	-45.67	35.05	54	-18.95	-	-	0	101	V
			* 17.731924	59.26	PK-U	41.6	0	-42.72	58.14	-	-	74	-15.86	0	199	H
			* 17.731227	47.58	ADR	41.6	0	-42.73	46.45	54	-7.55	-	-	0	199	H
			* 17.725803	59.44	PK-U	41.6	0	-42.89	58.15	-	-	74	-15.85	0	199	V
			* 17.726094	47.67	ADR	41.6	0	-42.89	46.38	54	-7.62	-	-	0	199	V
	6985	6 + 5	* 1.322255	60.33	PK-U	29.3	0	-48.29	41.34	-	-	74	-32.66	0	101	H
			* 1.320971	48.68	ADR	29.3	0	-48.29	29.69	54	-24.31	-	-	0	101	H
			* 5.021127	57.96	PK-U	34.4	0	-45.48	46.88	-	-	74	-27.12	0	101	H
			* 5.019006	46.13	ADR	34.4	0	-45.46	35.07	54	-18.93	-	-	0	101	H
			* 1.271401	60.11	PK-U	29.3	0	-48.33	41.08	-	-	88.2	-47.12	0	101	V
			* 1.274107	48.41	ADR	29.4	0	-48.32	29.49	68.2	-38.71	-	-	0	101	V
			* 5.02841	57.66	PK-U	34.4	0	-45.48	46.58	-	-	74	-27.42	0	101	V
			* 5.025589	46.13	ADR	34.4	0	-45.51	35.02	54	-18.98	-	-	0	101	V
			* 17.727596	58.95	PK-U	41.6	0	-42.82	57.73	-	-	74	-16.27	0	101	H
			* 17.730229	47.53	ADR	41.6	0	-42.76	46.37	54	-7.63	-	-	0	101	H
			* 17.742458	60.32	PK-U	41.6	0	-42.6	59.32	-	-	74	-14.68	0	101	V
			* 17.738614	47.88	ADR	41.6	0	-42.55	46.93	54	-7.07	-	-	0	101	V
11be (Partial RU Mode)	6185 (106+26T)	6 + 5	* 2.386746	49.38	ADR	32.3	0	-50.57	31.11	54	-22.89	-	-	360	199	V
			* 2.387932	60.55	PK-U	32.3	0	-50.56	42.29	-	-	74	-31.71	360	199	V
			2.390376	62.53	PK-U	32.3	0	-50.52	44.31	-	-	88.2	-43.89	360	101	H
			2.391846	50.53	ADR	32.3	0	-50.53	32.3	68.2	-35.9	-	-	360	101	H
			* 3.892399	46.13	ADR	33.5	0	-47.74	31.89	54	-22.11	-	-	360	199	V
			* 3.893182	58.1	PK-U	33.5	0	-47.73	43.87	-	-	74	-30.13	360	199	V
			* 3.895464	57.74	PK-U	33.5	0	-47.69	43.55	-	-	74	-30.45	360	199	H
			* 3.896916	46.65	ADR	33.5	0	-47.73	32.42	54	-21.58	-	-	360	199	H
			* 11.923399	43.7	ADR	38.7	0	-44.04	38.36	54	-15.64	-	-	360	101	V
			* 11.925387	55.21	PK-U	38.7	0	-44.14	49.77	-	-	74	-24.23	360	101	V
			* 11.925889	55.17	PK-U	38.7	0	-44.16	49.71	-	-	74	-24.29	360	199	H
			* 11.926724	43.71	ADR	38.8	0	-44.1	38.41	54	-15.59	-	-	360	199	H
	6505 (996+484T)	6 + 5	* 2.240022	49.36	ADR	32.2	0.1	-50.91	30.75	54	-23.25	-	-	15	118	H
			2.240923	60.71	PK-U	32.2	0	-50.92	41.99	-	-	74	-32.01	144	113	V
			2.241197	61.02	PK-U	32.2	0	-50.92	42.3	-	-	74	-31.7	15	118	H
			* 2.241312	49.29	ADR	32.2	0.1	-50.91	30.68	54	-23.32	-	-	144	113	V
			4.282383	57.69	PK-U	34.2	0	-47.1	44.79	-	-	74	-29.21	206	178	V
			* 4.282688	46.16	ADR	34.2	0.1	-47.09	33.37	54	-20.63	-	-	206	178	V
			* 4.286113	46.05	ADR	34.2	0.1	-47.09	33.26	54	-20.74	-	-	79	186	H
			4.288429	57.86	PK-U	34.2	0	-47.09	44.97	-	-	74	-29.03	79	186	H
			* 12.399223	43.83	ADR	38.9	0.1	-44.17	38.66	54	-15.34	-	-	198	165	H
			* 12.400096	43.28	ADR	38.9	0.1	-44.19	38.09	54	-15.91	-	-	291	225	V
			12.401082	55.23	PK-U	38.9	0	-44.17	49.96	-	-	74	-24.04	198	165	H
			12.402856	55.01	PK-U	38.9	0	-44.19	49.72	-	-	74	-24.28	291	225	V
	6985 (996+484T)	6 + 5	1.63234	57.61	PK-U	28.6	0	-46.3	39.91	-	-	88.2	-48.29	90	200	H
			1.633249	45.68	ADR	28.6	0.1	-46.3	28.08	68.2	-40.12	-	-	90	200	H
			* 3.796943	55.63	PK-U	33.4	0	-45.19	43.84	-	-	74	-30.16	345	173	H
			* 3.795951	43.82	ADR	33.4	0.1	-45.1	32.22	54	-21.78	-	-	345	173	H
			1.631001	57.48	PK-U	28.6	0	-46.3	39.78	-	-	88.2	-48.42	231	292	V
			1.631603	45.74	ADR	28.6	0.1	-46.3	28.14	68.2	-40.06	-	-	231	292	V
			* 3.799782	55.71	PK-U	33.4	0	-45.2	43.91	-	-	74	-30.09	15	237	V
			* 3.7978	43.9	ADR	33.4	0.1	-45.2	32.2	54	-21.8	-	-	15	237	V
			12.703917	54.68	PK-U	38.8	0	-41.59	51.89	-	-	88.2	-36.31	15	200	H
			12.702825	41.91	ADR	38.8	0.1	-41.54	39.27	68.2	-28.93	-	-	15	200	H
			12.703846	53.32	PK-U	38.8	0	-41.58	50.54	-	-	88.2	-37.66	15	200	V
			12.703744	41.95	ADR	38.8	0.1	-41.57	39.28	68.2	-28.92	-	-	15	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6505MHz)



RADIATED EMISSIONS

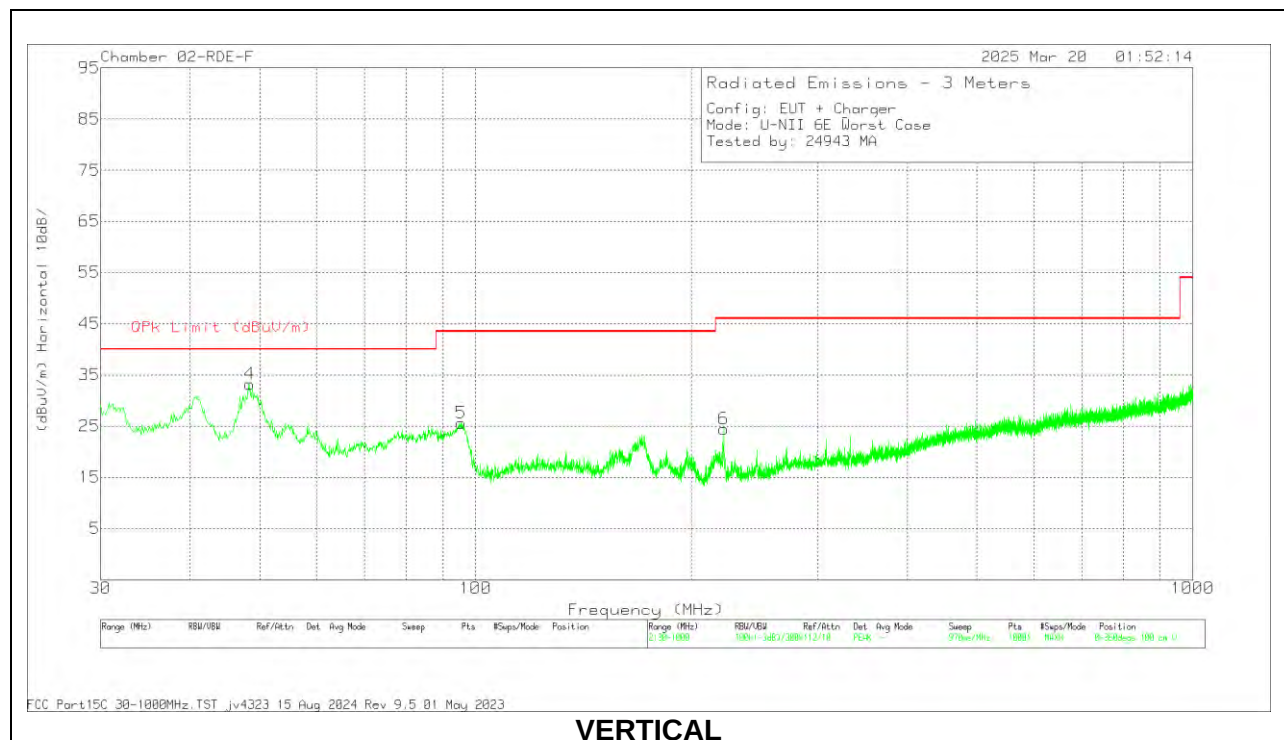
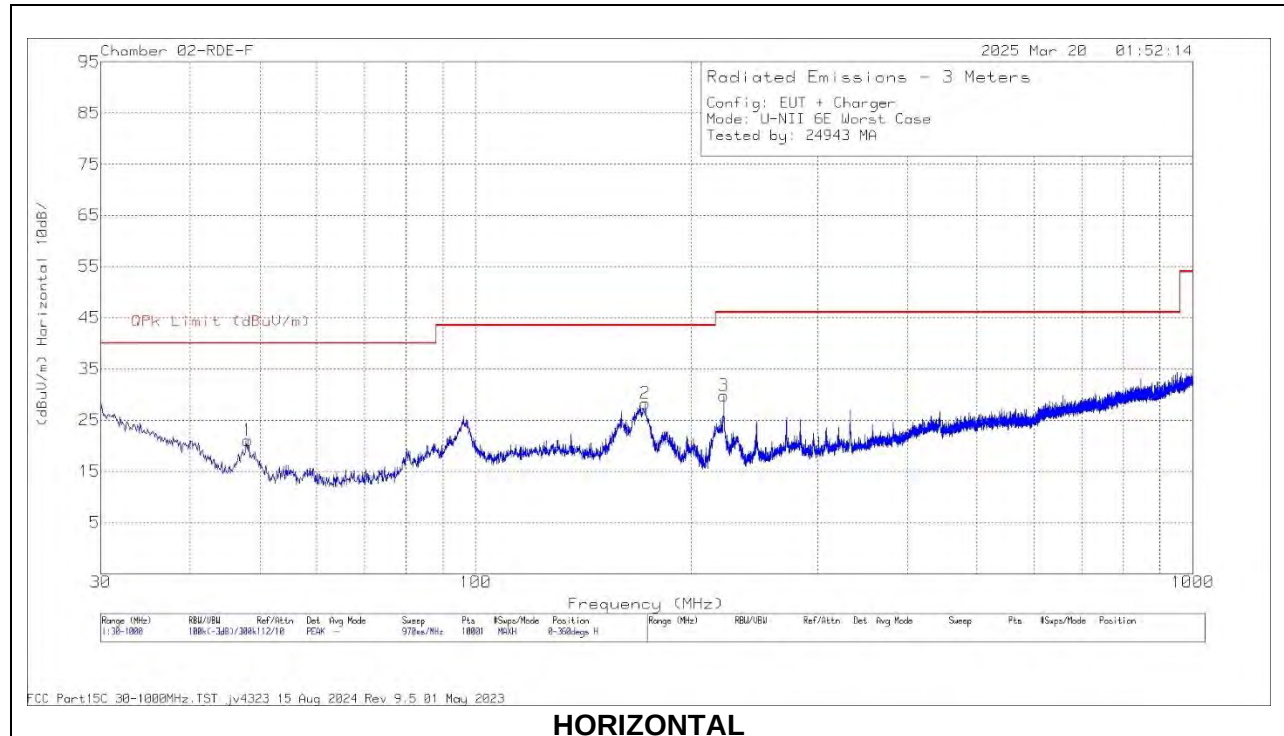
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84797 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.325359	60.76	PK-U	29.3	0	-48.3	41.76	-	-	74	-32.24	0	101	H
	* 1.325998	48.83	ADR	29.3	0	-48.31	29.82	54	-24.18	-	-	0	101	H
2	* 5.008117	57.52	PK-U	34.4	0	-45.6	46.32	-	-	74	-27.68	0	101	H
	* 5.010058	46.31	ADR	34.4	0	-45.6	35.11	54	-18.89	-	-	0	101	H
3	* 1.324343	60.47	PK-U	29.3	0	-48.28	41.49	-	-	74	-32.51	0	101	V
	* 1.322197	48.88	ADR	29.3	0	-48.29	29.89	54	-24.11	-	-	0	101	V
4	* 5.001955	58.01	PK-U	34.4	0	-45.7	46.71	-	-	74	-27.29	0	101	V
	* 5.002934	46.32	ADR	34.4	0	-45.67	35.05	54	-18.95	-	-	0	101	V
5	* 17.73192	59.26	PK-U	41.6	0	-42.72	58.14	-	-	74	-15.86	0	199	H
	* 17.73122	47.58	ADR	41.6	0	-42.73	46.45	54	-7.55	-	-	0	199	H
6	* 17.72580	59.44	PK-U	41.6	0	-42.89	58.15	-	-	74	-15.85	0	199	V
	* 17.72609	47.67	ADR	41.6	0	-42.89	46.38	54	-7.62	-	-	0	199	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz



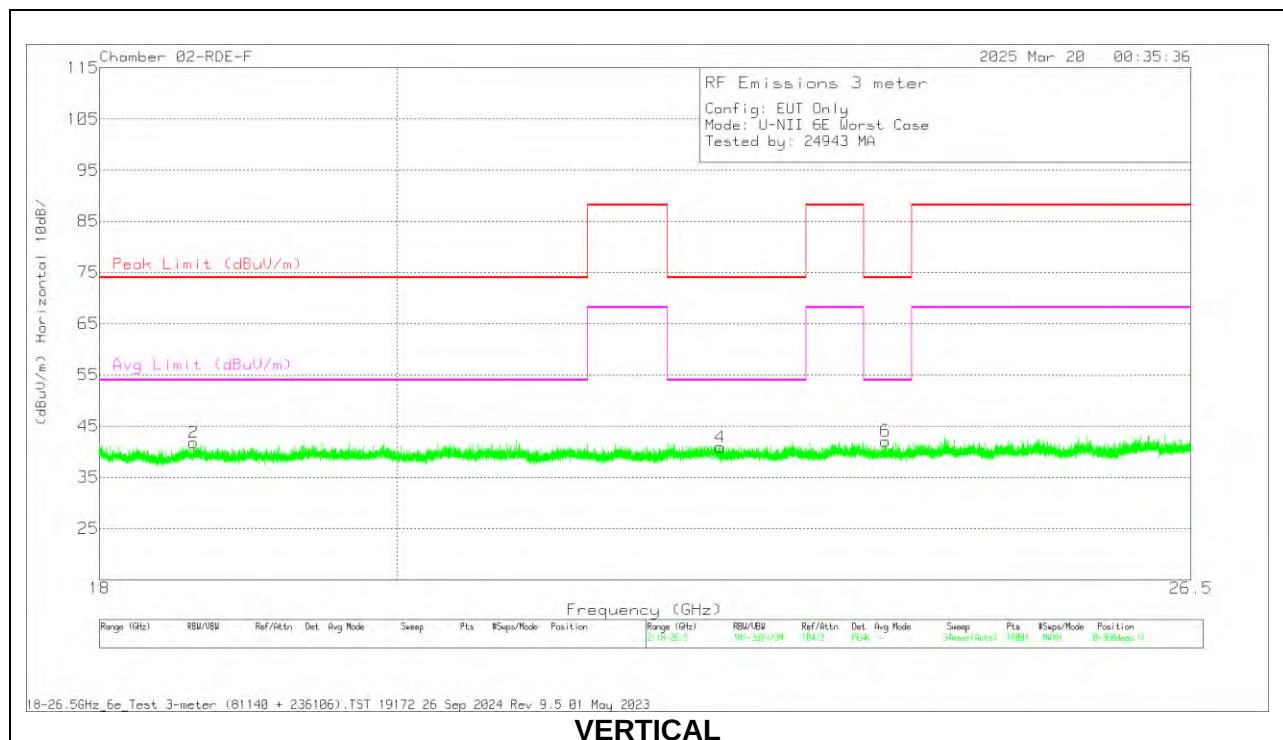
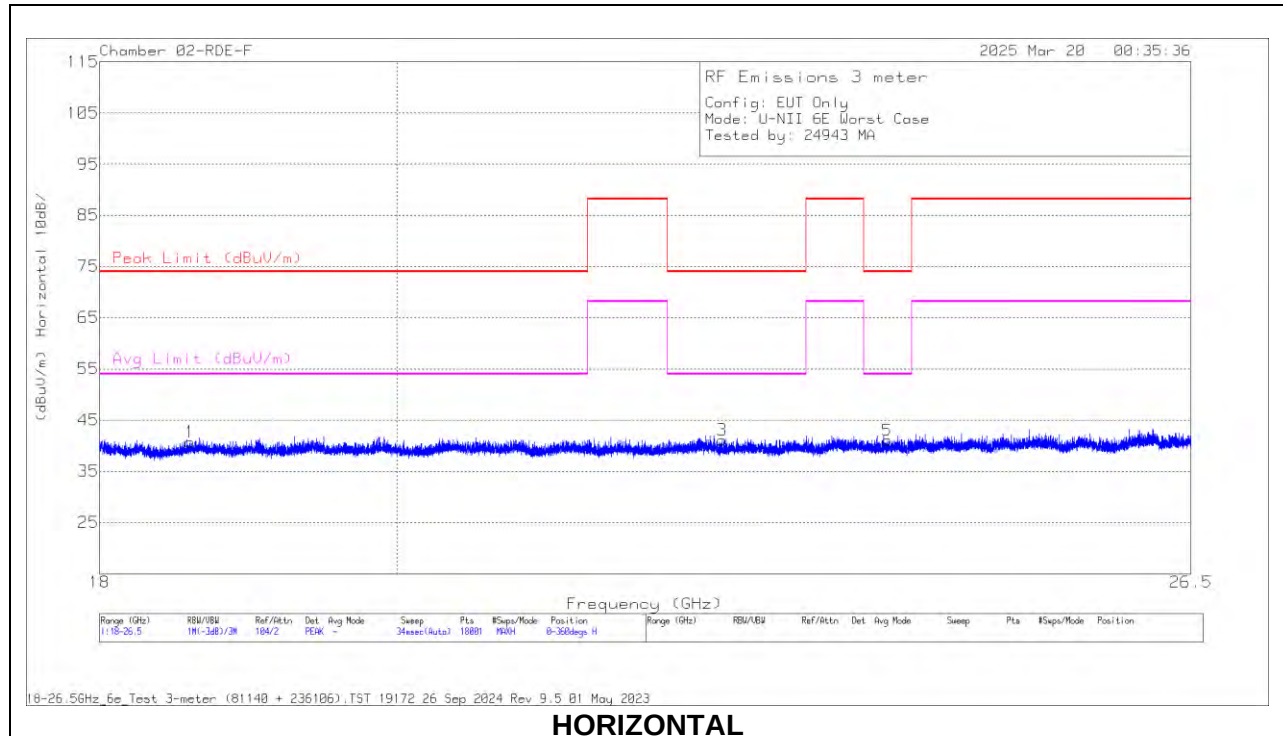
RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	202301 ACF (dB/m)	CBL/AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 172.418	36.16	Qp	17.4	-30.7	22.86	43.52	-20.66	14	143	H
1	48.022	45.37	Qp	14.2	-31.6	27.97	40	-12.03	118	106	V
4	48.416	32.63	Qp	14.1	-31.7	15.03	40	-24.97	255	383	H
5	94.6711	37.88	Qp	14.8	-31.2	21.48	43.52	-22.04	80	111	V
6	221.787	35.2	Qp	16.6	-30.4	21.4	46.02	-24.62	283	206	V
3	221.949	40.76	Qp	16.6	-30.4	26.96	46.02	-19.06	29	110	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

1.4. WORST CASE 18-26 GHz



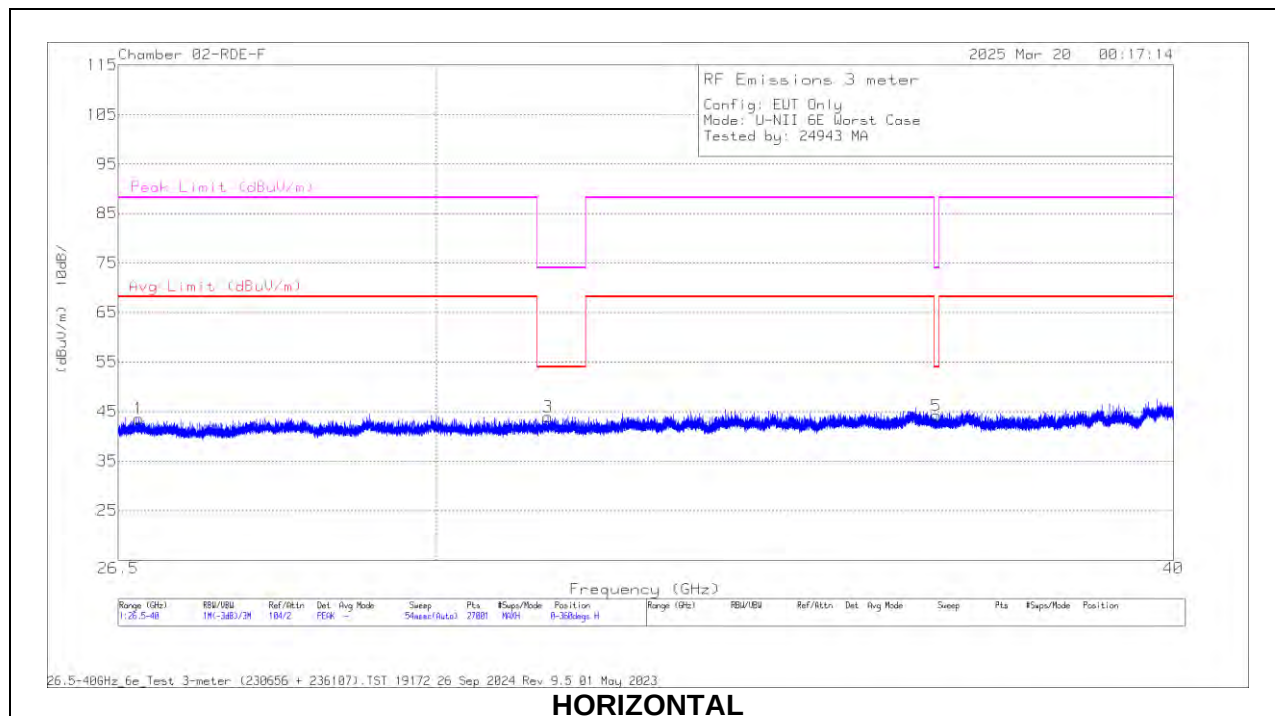
RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81140 ACF (dB/m)	AMP (dB)	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.5865	54.14	Pk	32.4	-63.3	17.4	0	40.64	74	-33.36	-	-	0-360	101	H
3	* 22.44455	51.31	Pk	33.3	-62.6	19.1	0	41.11	74	-32.89	-	-	0-360	101	H
5	* 23.79605	51.4	Pk	33.7	-63.8	19.7	0	41	74	-33	-	-	0-360	101	H
2	* 18.61058	55.26	Pk	32.4	-63.3	17.4	0	41.76	74	-32.24	-	-	0-360	200	V
4	* 22.42755	51.07	Pk	33.3	-62.6	19.1	0	40.87	74	-33.13	-	-	0-360	200	V
6	* 23.78235	52.49	Pk	33.7	-63.8	19.7	0	42.09	74	-31.91	-	-	0-360	101	V

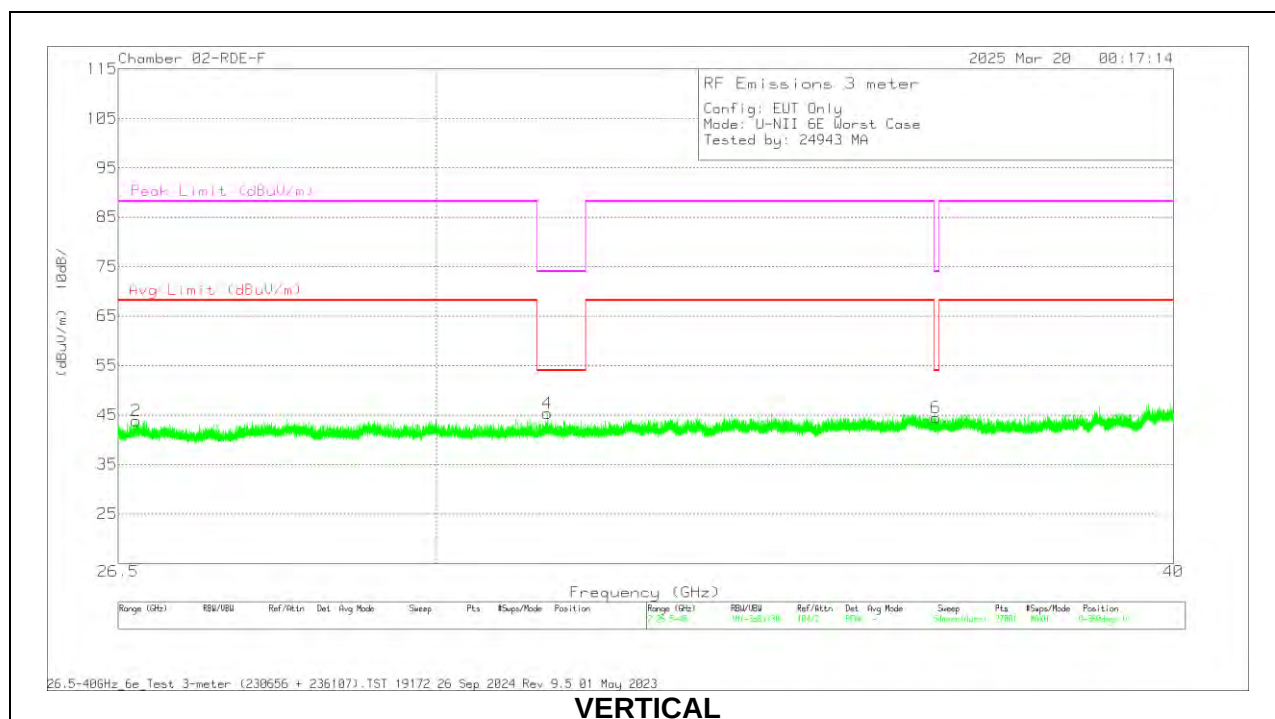
* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

1.5. WORST CASE 26-40 GHz



HORIZONTAL



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230656 ACF (dB/m)	AMP (dB)	CBL (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 31.338	46.72	Pk	36.5	-62.1	22.9	0	44.02	-	-	74	-29.98	0-360	101	H
5	* 36.4715	47.36	Pk	37.3	-65.6	25.1	0	44.16	-	-	74	-29.84	0-360	101	H
4	* 31.33	48.06	Pk	36.5	-62.1	22.9	0	45.36	-	-	74	-28.64	0-360	200	V
6	* 36.46	47.53	Pk	37.3	-65.5	25.1	0	44.43	-	-	74	-29.57	0-360	200	V
2	26.69	52.37	Pk	35.7	-65.2	21	0	43.87	-	-	88.2	-44.33	0-360	101	V
1	26.7145	52	Pk	35.7	-65.1	21	0	43.6	-	-	88.2	-44.60	0-360	200	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

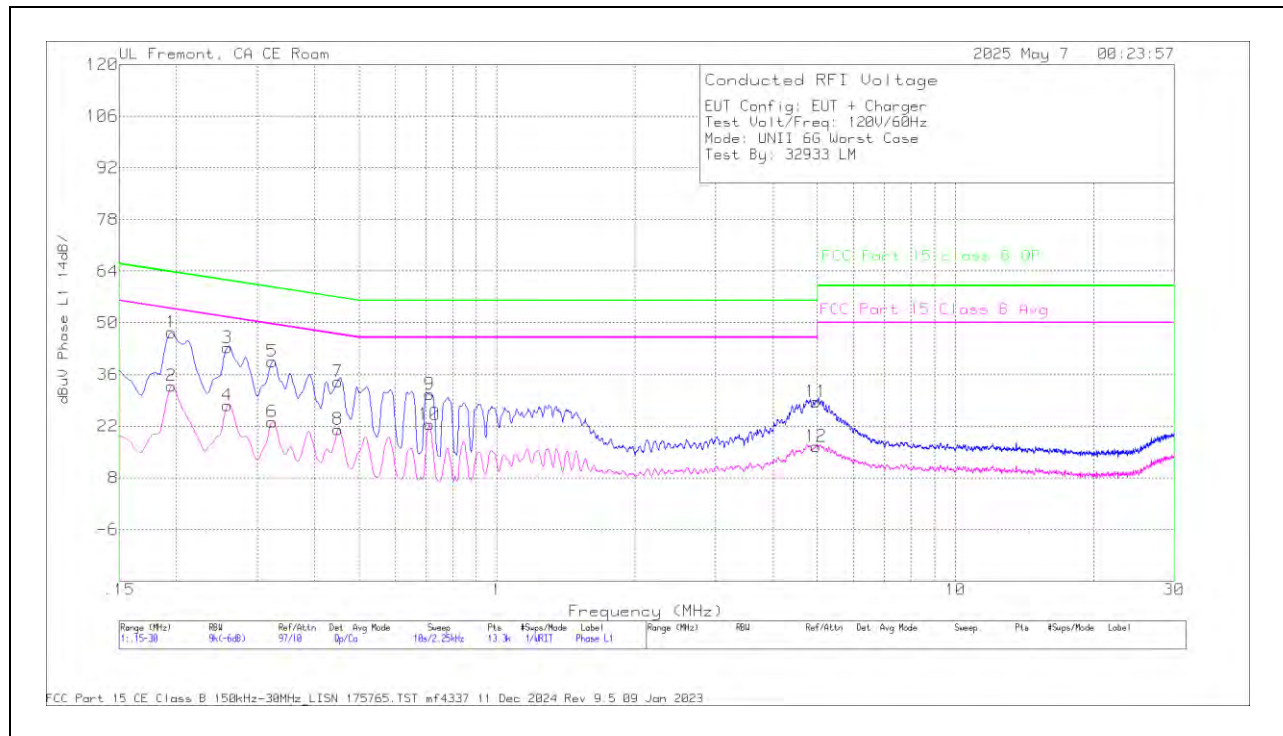
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. EUT WITH AC ADAPTER

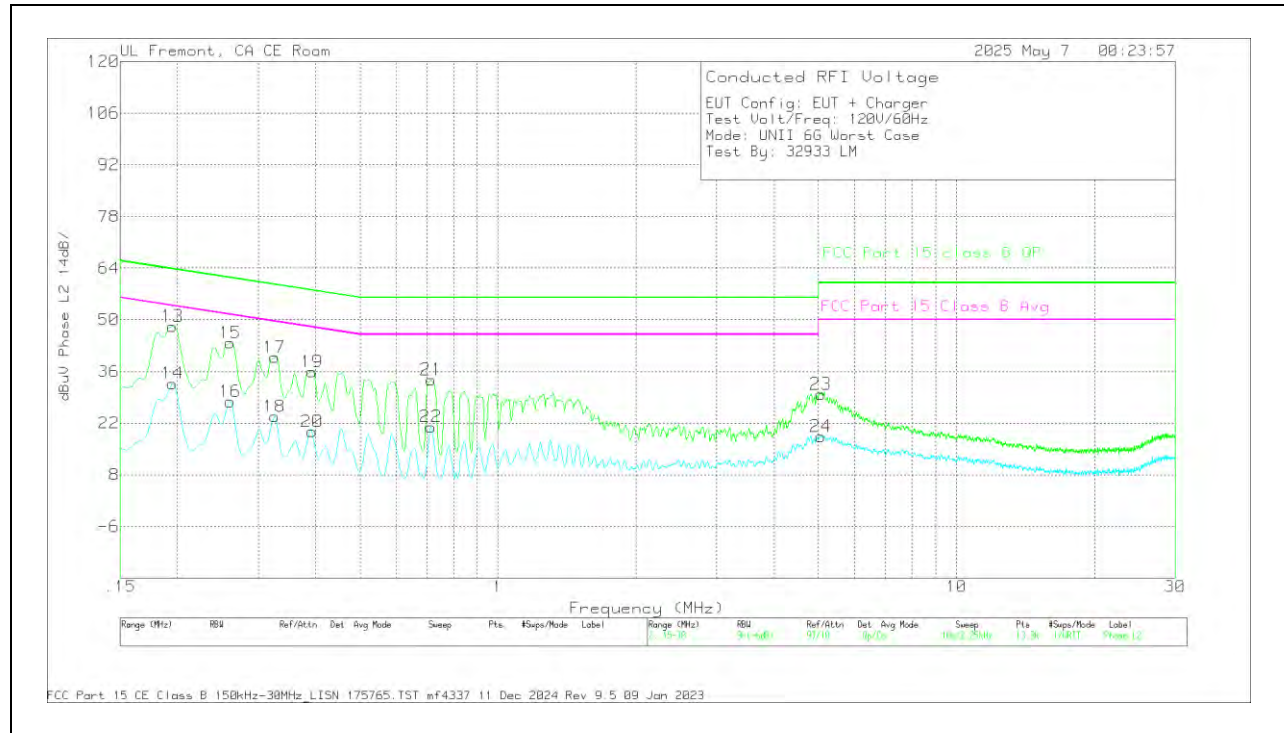
LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	CBL (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av(CISPR) Margin (dB)
2	.195	14.33	Ca	.1	.1	8.4	10	32.93	-	-	53.82	-20.89
4	.258	9.54	Ca	-.1	0	8.2	10	27.64	-	-	51.5	-23.86
6	.3233	5.2	Ca	-.2	0	8.2	10	23.2	-	-	49.62	-26.42
8	.4493	2.04	Ca	.2	0	8.9	10	21.14	-	-	46.89	-25.75
10	.7125	4	Ca	.2	0	8.3	10	22.5	-	-	46	-23.5
12	4.9616	-1.97	Ca	.2	0	8.3	10	16.53	-	-	46	-29.47
1	.195	28.84	Qp	.1	.1	8.4	10	47.44	63.82	-16.38	-	-
3	.258	25.2	Qp	-.1	0	8.2	10	43.3	61.5	-18.2	-	-
5	.3233	21.57	Qp	-.2	0	8.2	10	39.57	59.62	-20.05	-	-
7	.4493	14.99	Qp	.2	0	8.9	10	34.09	56.89	-22.8	-	-
9	.7125	12.19	Qp	.2	0	8.3	10	30.69	56	-25.31	-	-
11	4.9628	10.23	Qp	.1	0	8.3	10	28.63	56	-27.37	-	-

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS

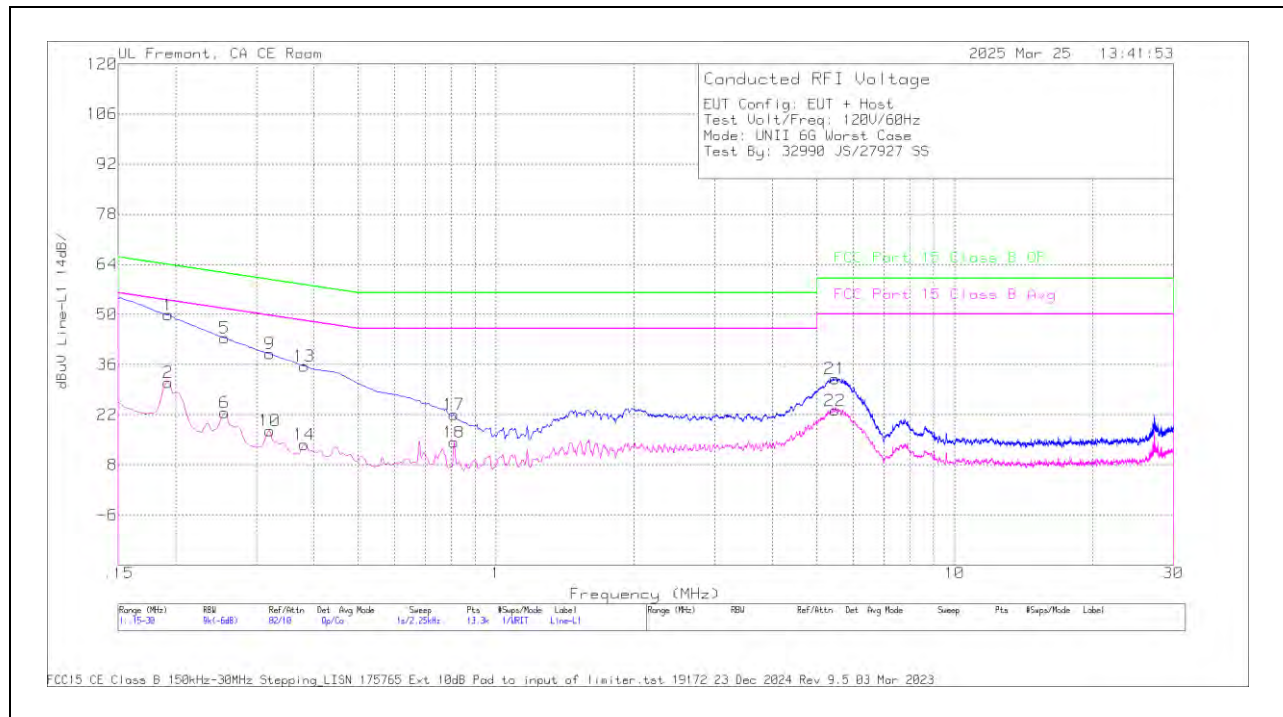


Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	CBL (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av(CISPR) Margin (dB)
14	.195	14.24	Ca	.1	0	8.4	10	32.74	-	-	53.82	-21.08
16	.2603	9.73	Ca	-.1	0	8.2	10	27.83	-	-	51.42	-23.59
18	.3255	5.77	Ca	-.2	0	8.2	10	23.77	-	-	49.57	-25.8
20	.393	1.88	Ca	-.5	0	8.3	10	19.68	-	-	48	-28.32
22	.7136	2.49	Ca	.2	0	8.3	10	20.99	-	-	46	-25.01
24	5.0573	-1.13	Ca	.2	0	8.3	10	18.37	-	-	50	-31.63
13	.195	29.72	Qp	.1	0	8.4	10	48.22	63.82	-15.6	-	-
15	.2603	25.62	Qp	-.1	0	8.2	10	43.72	61.42	-17.7	-	-
17	.3255	21.82	Qp	-.2	0	8.2	10	39.82	59.57	-19.75	-	-
19	.393	18.08	Qp	-.5	0	8.3	10	35.88	58	-22.12	-	-
21	.7148	15.22	Qp	.2	0	8.3	10	33.72	56	-22.28	-	-
23	5.0573	11.3	Qp	.2	0	8.3	10	29.8	60	-30.2	-	-

Qp - Quasi-Peak detector
Ca - CISPR average detection

2.2. EUT WITH LAPTOP

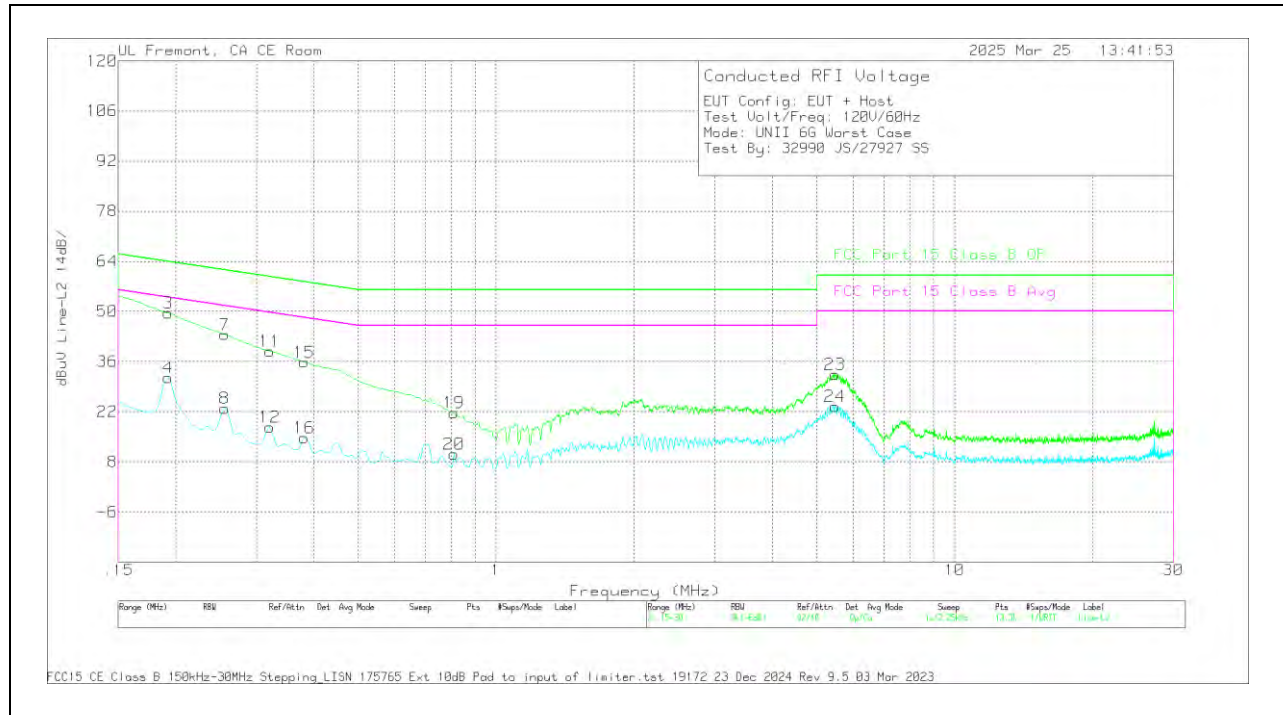
LINE 1 RESULTS



Range 1: Line-L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	CBL (dB)	CBL (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av(CISPR) Margin (dB)
2	.1928	12.28	Ca	.1	.2	8.4	10	30.98	-	-	53.92	-22.94
6	.2558	4.49	Ca	0	-.1	8.2	10	22.59	-	-	51.57	-28.98
10	.321	-5.6	Ca	0	-.2	8.2	10	17.44	-	-	49.68	-32.24
14	.3818	-4.22	Ca	0	-.5	8.3	10	13.58	-	-	48.24	-34.66
18	.8093	-3.74	Ca	0	.1	7.9	10	14.26	-	-	46	-31.74
22	5.478	4.68	Ca	0	0	8.5	10	23.18	-	-	50	-26.82
1	.1928	31.12	Qp	.1	.2	8.4	10	49.82	63.92	-14.1	-	-
5	.2558	25.39	Qp	0	-.1	8.2	10	43.49	61.57	-18.08	-	-
9	.321	20.99	Qp	0	-.2	8.2	10	38.99	59.68	-20.69	-	-
13	.3818	17.78	Qp	0	-.5	8.3	10	35.58	58.24	-22.66	-	-
17	.8093	4.1	Qp	0	.1	7.9	10	22.1	56	-33.9	-	-
21	5.478	13.55	Qp	0	0	8.5	10	32.05	60	-27.95	-	-

Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS



Range 2: Line-L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	CBL (dB)	CBL (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av(CISPR) Margin (dB)
4	.1928	13.04	Ca	0	0	8.4	10	31.44	-	-	53.92	-22.48
8	.2558	4.57	Ca	0	.2	8.2	10	22.97	-	-	51.57	-28.6
12	.321	-.52	Ca	0	0	8.2	10	17.68	-	-	49.68	-32
16	.3818	-3.55	Ca	0	-.1	8.3	10	14.65	-	-	48.24	-33.59
20	.8093	-7.74	Ca	0	0	7.9	10	10.16	-	-	46	-35.84
24	5.478	4.76	Ca	0	.2	8.5	10	23.46	-	-	50	-26.54
3	.1928	31.1	Qp	0	0	8.4	10	49.5	63.92	-14.42	-	-
7	.2558	25.11	Qp	0	.2	8.2	10	43.51	61.57	-18.06	-	-
11	.321	20.73	Qp	0	0	8.2	10	38.93	59.68	-20.75	-	-
15	.3818	17.6	Qp	0	-.1	8.3	10	35.8	58.24	-22.44	-	-
19	.8093	3.76	Qp	0	0	7.9	10	21.66	56	-34.34	-	-
23	5.478	13.7	Qp	0	.2	8.5	10	32.4	60	-27.6	-	-

Qp - Quasi-Peak detector
 Ca - CISPR average detection

3. SETUP PHOTOS

Refer to 15496282-EP1V1 report for Setup_Photos.

END OF TEST REPORT