

RADIATED TEST REPORT

Report Number: 15496240-E12V1& E13V1

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3522

Brand : APPLE

FCC ID : BCG-E8957A

IC : 579C-E8957A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2025-08-01

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



TABLE OF CONTENTS

1. RADIATED TEST RESULTS	3
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)	5
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	5
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	8
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE	11
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	14
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	17
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	29
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	41
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	53
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	56
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	59
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	62
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	65
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	68
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	71
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	74
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	86
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	86
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	87
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	90
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	93
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	96
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	99
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	102
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	105
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	108
1.3. WORST CASE BELOW 1 GHz	120
1.4. WORST CASE 18-26 GHz	122
1.5. WORST CASE 26-40 GHz	124
2. AC POWER LINE CONDUCTED EMISSIONS	126
2.1. EUT WITH AC ADAPTER	127
2.2. EUT WITH LAPTOP	129
3. SETUP PHOTOS	131

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
FCC §15.205 Restricted bands
§15.209 and FCC §15.407(b)(6) -Un-Restricted bands

RSS-GEN 8.1
RSS-GEN 8.9 Un-Restricted bands
RSS-GEN 8.10 Restricted bands
RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

RESULTS

The plots in these sections are for reference of settings only, for different bandwidth and different antenna.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)

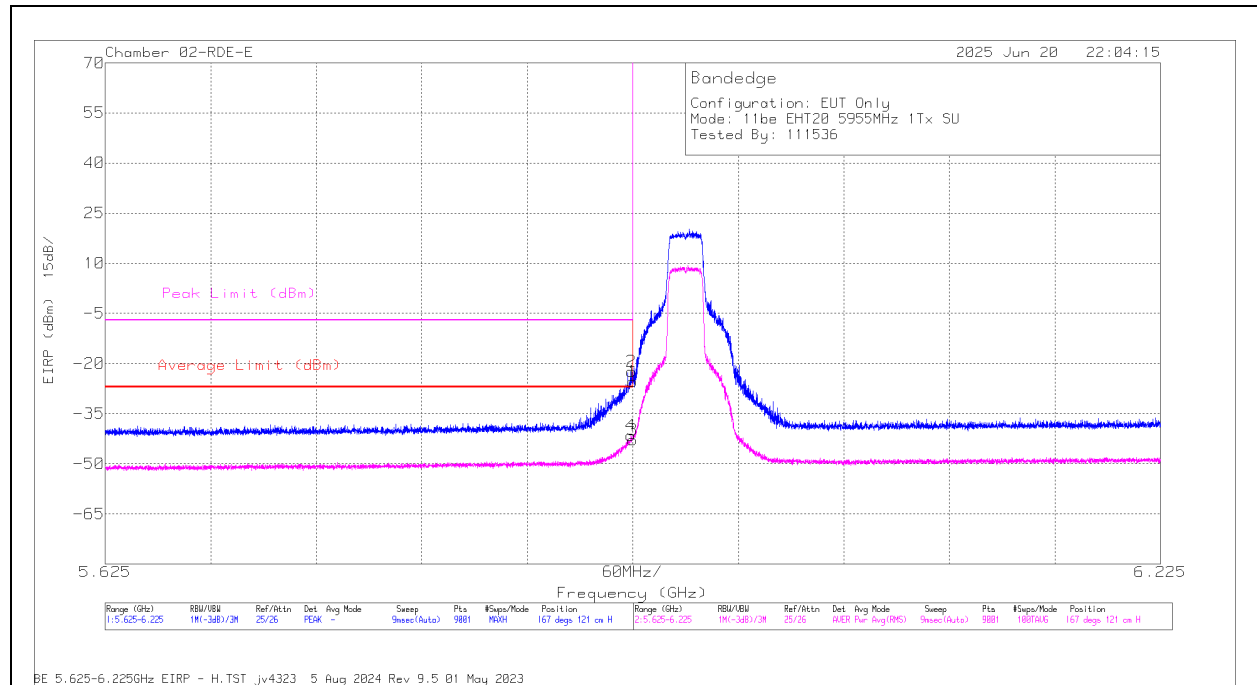
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.924002	-52.18	RMS	35.2	11.8	0.84	-36.56	-40.9	-27	-13.9	-	-	167	121	H
			5.924068	-32.73	Pk	35.2	11.8	0	-36.56	-22.29	-	-	-7	-15.29	167	121	H
			5.925	-35.93	Pk	35.2	11.8	0	-36.51	-25.44	-	-	-7	-18.44	167	121	H
			5.925	-53.45	RMS	35.2	11.8	0.84	-36.51	-42.12	-27	-15.12	-	-	167	121	H
			5.924602	-45.31	Pk	35.2	11.8	0	-36.53	-34.84	-	-	-7	-27.84	143	114	V
			5.924868	-58.78	RMS	35.2	11.8	0.84	-36.52	-47.46	-27	-20.46	-	-	143	114	V
			5.925	-45.11	Pk	35.2	11.8	0	-36.51	-34.62	-	-	-7	-27.62	143	114	V
			5.925	-59.2	RMS	35.2	11.8	0.84	-36.51	-47.87	-27	-20.87	-	-	143	114	V
		5	5.923401	-46.06	Pk	35.2	11.8	0	-36.16	-35.22	-	-	-7	-28.22	154	195	H
			5.923801	-59.87	RMS	35.2	11.8	0.84	-36.12	-48.15	-27	-21.15	-	-	154	195	H
			5.925	-47.74	Pk	35.2	11.8	0	-36.2	-36.94	-	-	-7	-29.94	154	195	H
			5.925	-61.36	RMS	35.2	11.8	0.84	-36.2	-49.72	-27	-22.72	-	-	154	195	H
			5.924735	-58.88	RMS	35.2	11.8	0.84	-36.17	-47.21	-27	-20.21	-	-	169	198	V
			5.924935	-43.56	Pk	35.2	11.8	0	-36.19	-32.75	-	-	-7	-25.75	169	198	V
			5.925	-45.13	Pk	35.2	11.8	0	-36.2	-34.33	-	-	-7	-27.33	169	198	V
			5.925	-59.53	RMS	35.2	11.8	0.84	-36.2	-47.89	-27	-20.89	-	-	169	198	V
EHT40 (SU Mode)	5965	6	5.923335	-22.53	Pk	35.2	11.8	0	-36.55	-12.08	-	-	-7	-5.08	330	129	H
			5.924868	-42.04	RMS	35.2	11.8	0.97	-36.52	-30.59	-27	-3.59	-	-	330	129	H
			5.925	-25.02	Pk	35.2	11.8	0	-36.51	-14.53	-	-	-7	-7.53	330	129	H
			5.925	-43.08	RMS	35.2	11.8	0.97	-36.51	-31.62	-27	-4.62	-	-	330	129	H
			5.924002	-36.35	Pk	35.2	11.8	0	-36.56	-25.91	-	-	-7	-18.91	330	129	V
			5.924735	-58.71	RMS	35.2	11.8	0.97	-36.52	-47.26	-27	-20.26	-	-	330	129	V
			5.925	-43.41	Pk	35.2	11.8	0	-36.51	-32.92	-	-	-7	-25.92	330	129	V
			5.925	-59.91	RMS	35.2	11.8	0.97	-36.51	-48.45	-27	-21.45	-	-	330	129	V
		5	5.924802	-33.8	Pk	35.1	11.8	0	-37.6	-24.5	-	-	-7	-17.5	26	190	H
			5.924802	-53.23	RMS	35.1	11.8	0.97	-37.6	-42.96	-27	-15.96	-	-	26	190	H
			5.925	-38.27	Pk	35.1	11.8	0	-37.62	-28.99	-	-	-7	-21.99	26	190	H
			5.925	-52.83	RMS	35.1	11.8	0.97	-37.62	-42.58	-27	-15.58	-	-	26	190	H
			5.920201	-53.6	RMS	35.1	11.8	0.97	-37.62	-43.35	-27	-16.35	-	-	22	179	V
			5.924535	-33.88	Pk	35.1	11.8	0	-37.58	-24.56	-	-	-7	-17.56	22	179	V
			5.925	-38.04	Pk	35.1	11.8	0	-37.62	-28.76	-	-	-7	-21.76	22	179	V
			5.925	-55.43	RMS	35.1	11.8	0.97	-37.62	-45.18	-27	-18.18	-	-	22	179	V
EHT80 (SU Mode)	5985	6	5.921668	-22.75	Pk	35.3	11.8	0	-37.7	-13.35	-	-	-7	-6.35	325	101	H
			5.923601	-39.48	RMS	35.3	11.8	1.07	-37.71	-29.02	-27	-2.02	-	-	325	101	H
			5.925	-25.13	Pk	35.3	11.8	0	-37.72	-15.75	-	-	-7	-8.75	325	101	H
			5.925	-41.15	RMS	35.3	11.8	1.07	-37.72	-30.7	-27	-3.7	-	-	325	101	H
			5.923135	-41.83	Pk	35.3	11.8	0	-37.72	-32.45	-	-	-7	-25.45	328	110	V
			5.923535	-57.23	RMS	35.3	11.8	1.07	-37.71	-46.77	-27	-19.77	-	-	328	110	V
			5.925	-44.27	Pk	35.3	11.8	0	-37.72	-34.89	-	-	-7	-27.89	328	110	V
			5.925	-58.52	RMS	35.3	11.8	1.07	-37.72	-48.07	-27	-21.07	-	-	328	110	V
		5	5.917135	-70.7	RMS	35.2	11.8	1.07	-23.36	-45.99	-27	-18.99	-	-	39	218	H
			5.923801	-53.06	Pk	35.2	11.8	0	-23.35	-29.41	-	-	-7	-22.41	39	218	H
			5.925	-55.15	Pk	35.2	11.8	0	-23.36	-31.51	-	-	-7	-24.51	39	218	H
			5.925	-71.55	RMS	35.2	11.8	1.07	-23.36	-46.84	-27	-19.84	-	-	39	218	H
			5.918935	-68.05	RMS	35.2	11.8	1.07	-23.35	-43.33	-27	-16.33	-	-	26	204	V
			5.922468	-48.43	Pk	35.2	11.8	0	-23.31	-24.74	-	-	-7	-17.74	26	204	V
			5.925	-50.65	Pk	35.2	11.8	0	-23.36	-27.01	-	-	-7	-20.01	26	204	V
			5.925	-69.71	RMS	35.2	11.8	1.07	-23.36	-45	-27	-18	-	-	26	204	V
EHT160 (SU Mode)	6025	6	5.919735	-24.48	Pk	35.2	11.8	0	-36.53	-14.01	-	-	-7	-7.01	184	234	H
			5.923668	-41.14	RMS	35.2	11.8	1.16	-36.55	-29.53	-27	-2.53	-	-	184	234	H
			5.925	-27.53	Pk	35.2	11.8	0	-36.51	-17.04	-	-	-7	-10.04	184	234	H
			5.925	-41.76	RMS	35.2	11.8	1.16	-36.51	-30.11	-27	-3.11	-	-	184	234	H
			5.898935	-52.43	RMS	35.2	11.8	1.16	-36.64	-40.91	-27	-13.91	-	-	69	253	V
			5.902801	-36.46	Pk	35.2	11.8	0	-36.62	-26.08	-	-	-7	-19.08	69	253	V
			5.925	-40.29	Pk	35.2	11.8	0	-36.51	-29.8	-	-	-7	-22.8	69	253	V
			5.925	-55.12	RMS	35.2	11.8	1.16	-36.51	-43.47	-27	-16.47	-	-	69	253	V
		5	5.925	-43.06	Pk	35.2	11.8	0	-35.9	-31.96	-	-	-7	-24.96	342	194	H
			5.899268	-38.65	Pk	35.1	11.8	0	-35.94	-27.69	-	-	-7	-20.69	342	194	H
			5.925	-59.92	RMS	35.2	11.8	1.16	-35.9	-47.66	-27	-20.66	-	-	342	194	H
			5.899535	-53.37	RMS	35.2	11.8	1.16	-35.94	-41.15	-27	-14.15	-	-	342	194	H
			5.925	-43.04	Pk	35.2	11.8	0	-35.9	-31.94	-	-	-7	-24.94	358	246	V
			5.899268	-37.1	Pk	35.1	11.8	0	-35.94	-26.14	-	-	-7	-19.14	358	246	V
			5.925	-58.73	RMS	35.2	11.8	1.16	-35.9	-46.47	-27	-19.47	-	-	358	246	V
			5.892201	-52.91	RMS	35.1	11.8	1.16	-36.06	-40.91	-27	-13.91	-	-	358	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

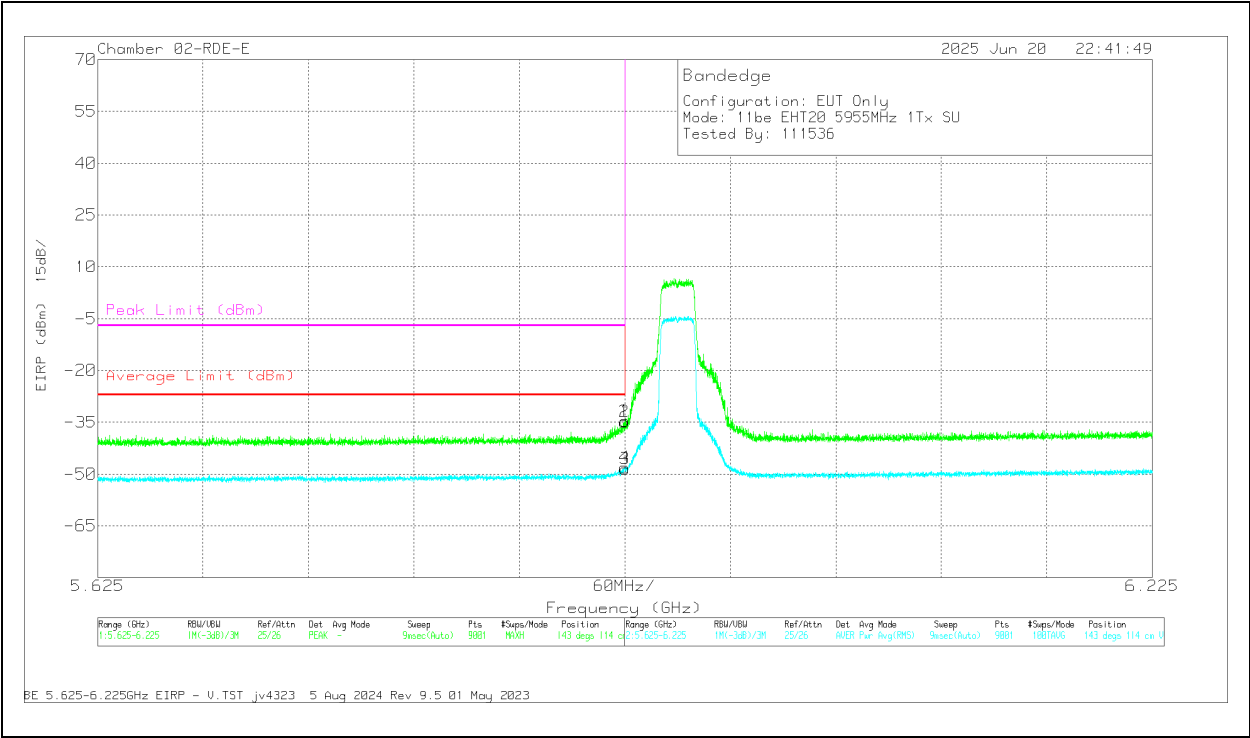
RMS - RMS detection

**1TX Antenna 6 MODE: SU
BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.924002	-52.18	RMS	35.2	11.8	0.84	-36.56	-40.9	-27	-13.9	-	-	167	121	H
2	5.924068	-32.73	Pk	35.2	11.8	0	-36.56	-22.29	-	-	-7	-15.29	167	121	H
1	5.925	-35.93	Pk	35.2	11.8	0	-36.51	-25.44	-	-	-7	-18.44	167	121	H
3	5.925	-53.45	RMS	35.2	11.8	0.84	-36.51	-42.12	-27	-15.12	-	-	167	121	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.924602	-45.31	Pk	35.2	11.8	0	-36.53	-34.84	-	-	-7	-27.84	143	114	V
4	5.924868	-58.78	RMS	35.2	11.8	0.84	-36.52	-47.46	-27	-20.46	-	-	143	114	V
1	5.925	-45.11	Pk	35.2	11.8	0	-36.51	-34.62	-	-	-7	-27.62	143	114	V
3	5.925	-59.2	RMS	35.2	11.8	0.84	-36.51	-47.87	-27	-20.87	-	-	143	114	V

Pk - Peak detector
RMS - RMS detection

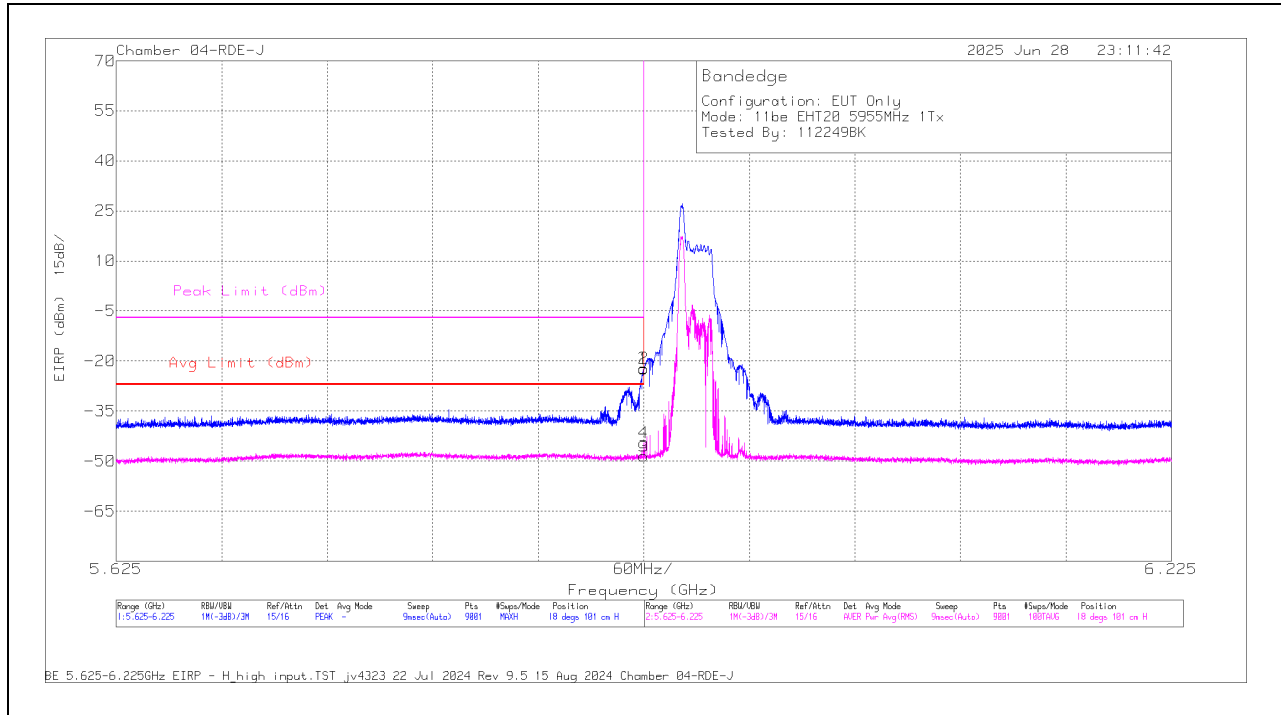
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 0)	5955	6	5.924802	-67.91	RMS	35.2	11.8	0	-23.7	-44.61	-27	-17.61	-	-	18	101	H
			5.924935	-45.54	Pk	35.2	11.8	0	-23.7	-22.24	-	-	-7	-15.24	18	101	H
			5.925	-45.7	Pk	35.2	11.8	0	-23.7	-22.4	-	-	-7	-15.4	18	101	H
			5.925	-71.97	RMS	35.2	11.8	0	-23.7	-48.67	-27	-21.67	-	-	18	101	H
			5.798868	-71.57	RMS	34.9	11.8	0	-23	-47.87	-27	-20.87	-	-	4	128	V
			5.924668	-58.72	Pk	35.2	11.8	0	-23.7	-35.42	-	-	-7	-28.42	4	128	V
		5	5.925	-59.7	Pk	35.2	11.8	0	-23.7	-36.4	-	-	-7	-29.4	4	128	V
			5.925	-73.3	RMS	35.2	11.8	0	-23.7	-50	-27	-23	-	-	4	128	V
			5.878335	-60.63	RMS	35.1	11.8	0	-36.1	-49.83	-27	-22.83	-	-	321	234	H
			5.924935	-42.72	Pk	35.2	11.8	0	-35.9	-31.62	-	-	-7	-24.62	321	234	H
			5.925	-43.53	Pk	35.2	11.8	0	-35.9	-32.43	-	-	-7	-25.43	321	234	H
			5.925	-61.55	RMS	35.2	11.8	0	-35.9	-50.45	-27	-23.45	-	-	321	234	H
			5.912868	-61.02	RMS	35.2	11.8	0	-35.91	-49.93	-27	-22.93	-	-	358	343	V
			5.924935	-40.71	Pk	35.2	11.8	0	-35.9	-29.61	-	-	-7	-22.61	358	343	V
			5.925	-42.14	Pk	35.2	11.8	0	-35.9	-31.04	-	-	-7	-24.04	358	343	V
			5.925	-62.09	RMS	35.2	11.8	0	-35.9	-50.99	-27	-23.99	-	-	358	343	V
			5.925	-38.15	Pk	35.4	11.8	0	-37.5	-28.45	-	-	-7	-21.45	280	103	H
EHT40 (RU 26 / Index 0)	5965	6	5.924602	-36.39	Pk	35.4	11.8	0	-37.51	-26.7	-	-	-7	-19.7	280	103	H
			5.925	-58.6	RMS	35.4	11.8	0.1	-37.5	-48.8	-27	-21.8	-	-	280	103	H
			5.924868	-58.08	RMS	35.4	11.8	0.1	-37.5	-48.28	-27	-21.28	-	-	280	103	H
			5.925	-48.96	Pk	35.4	11.8	0	-37.5	-39.26	-	-	-7	-32.26	224	251	V
			5.924402	-47.26	Pk	35.4	11.8	0	-37.51	-37.57	-	-	-7	-30.57	224	251	V
			5.925	-61.05	RMS	35.4	11.8	0.1	-37.5	-51.25	-27	-24.25	-	-	224	251	V
		5	5.924868	-60.15	RMS	35.4	11.8	0.1	-37.5	-50.35	-27	-23.35	-	-	224	251	V
			5.912401	-59.17	RMS	35.1	11.8	0.1	-37.55	-49.72	-27	-22.72	-	-	27	193	H
			5.924802	-39.49	Pk	35.1	11.8	0	-37.6	-30.19	-	-	-7	-23.19	27	193	H
			5.925	-40.23	Pk	35.1	11.8	0	-37.62	-30.95	-	-	-7	-23.95	27	193	H
			5.925	-60.25	RMS	35.1	11.8	0.1	-37.62	-50.87	-27	-23.87	-	-	27	193	H
			5.913868	-59.08	RMS	35.1	11.8	0.1	-37.54	-49.62	-27	-22.62	-	-	33	185	V
			5.924602	-39.78	Pk	35.1	11.8	0	-37.58	-30.46	-	-	-7	-23.46	33	185	V
			5.925	-41.33	Pk	35.1	11.8	0	-37.62	-32.05	-	-	-7	-25.05	33	185	V
			5.925	-60.29	RMS	35.1	11.8	0.1	-37.62	-50.91	-27	-23.91	-	-	33	185	V
EHT80 (RU 26 / Index 0)	5985	6	5.923935	-68.63	RMS	35.2	11.8	0.09	-23.36	-44.9	-27	-17.9	-	-	255	135	H
			5.924735	-43.18	Pk	35.2	11.8	0	-23.36	-19.54	-	-	-7	-12.54	255	135	H
			5.925	-42.92	Pk	35.2	11.8	0	-23.36	-19.28	-	-	-7	-12.28	255	135	H
			5.925	-72	RMS	35.2	11.8	0.09	-23.36	-48.27	-27	-21.27	-	-	255	135	H
			5.895001	-61.45	Pk	35.2	11.8	0	-23.22	-37.67	-	-	-7	-30.67	46	302	V
			5.902468	-73.18	RMS	35.2	11.8	0.09	-23.3	-49.39	-27	-22.39	-	-	46	302	V
		5	5.925	-63.88	Pk	35.2	11.8	0	-23.36	-40.24	-	-	-7	-33.24	46	302	V
			5.925	-74.02	RMS	35.2	11.8	0.09	-23.36	-50.29	-27	-23.29	-	-	46	302	V
			5.922935	-60.55	RMS	35.2	11.8	0.09	-36.54	-50	-27	-23	-	-	18	183	H
			5.924402	-41.65	Pk	35.2	11.8	0	-36.52	-31.17	-	-	-7	-24.17	18	183	H
			5.925	-41.15	Pk	35.2	11.8	0	-36.54	-30.69	-	-	-7	-23.69	18	183	H
			5.925	-61.21	RMS	35.2	11.8	0.09	-36.54	-50.66	-27	-23.66	-	-	18	183	H
			5.908935	-60.32	RMS	35.1	11.8	0.09	-36.6	-49.93	-27	-22.93	-	-	28	236	V
			5.924802	-39.1	Pk	35.2	11.8	0	-36.53	-28.63	-	-	-7	-21.63	28	236	V
			5.925	-45.66	Pk	35.2	11.8	0	-36.54	-35.2	-	-	-7	-28.2	28	236	V
			5.925	-61.3	RMS	35.2	11.8	0.09	-36.54	-50.75	-27	-23.75	-	-	28	236	V
EHT160 (RU 26 / Index 0)	6025	6	5.924268	-74.59	RMS	35.3	11.8	0	-22.86	-50.35	-27	-23.35	-	-	71	198	H
			5.924602	-51.44	Pk	35.3	11.8	0	-22.85	-27.19	-	-	-7	-20.19	71	198	H
			5.925	-51.69	Pk	35.3	11.8	0	-22.83	-27.42	-	-	-7	-20.42	71	198	H
			5.925	-75.8	RMS	35.3	11.8	0	-22.83	-51.53	-27	-24.53	-	-	71	198	H
			5.869001	-63.93	Pk	35.1	11.8	0	-22.69	-39.72	-	-	-7	-32.72	76	300	V
			5.897935	-76.31	RMS	35.2	11.8	0	-22.46	-51.77	-27	-24.77	-	-	76	300	V
		5	5.925	-65.46	Pk	35.3	11.8	0	-22.83	-41.19	-	-	-7	-34.19	76	300	V
			5.925	-77.54	RMS	35.3	11.8	0	-22.83	-53.27	-27	-26.27	-	-	76	300	V
			5.912868	-59.13	RMS	35.1	11.8	0	-37.53	-49.76	-27	-22.76	-	-	278	272	H
			5.924468	-41.11	Pk	35.1	11.8	0	-37.57	-31.78	-	-	-7	-24.78	278	272	H
			5.925	-41.02	Pk	35.1	11.8	0	-37.62	-31.74	-	-	-7	-24.74	278	272	H
			5.925	-59.98	RMS	35.1	11.8	0	-37.62	-50.7	-27	-23.7	-	-	278	272	H
			5.922801	-58.68	RMS	35.1	11.8	0	-37.6	-49.38	-27	-22.38	-	-	272	243	V
			5.924602	-39.31	Pk	35.1	11.8	0	-37.58	-29.99	-	-	-7	-22.99	272	243	V
			5.925	-40.68	Pk	35.1	11.8	0	-37.62	-31.4	-	-	-7	-24.4	272	243	V
			5.925	-59.48	RMS	35.1	11.8	0	-37.62	-50.2	-27	-23.2	-	-	272	243	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

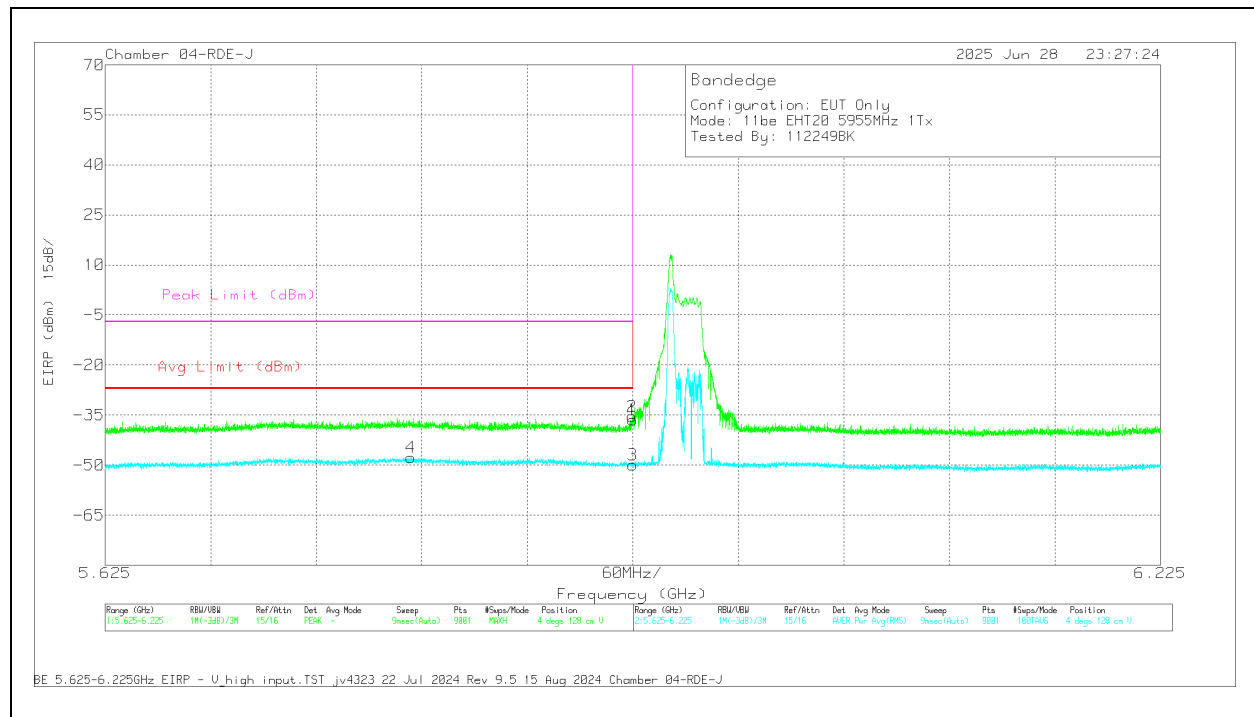
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 26-Tones, RU Index 0**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.924802	-67.91	RMS	35.2	-23.7	11.8	0	-44.61	-27	-17.61	-	-	18	101	H
2	5.924935	-45.54	Pk	35.2	-23.7	11.8	0	-22.24	-	-	-7	-15.24	18	101	H
1	5.925	-45.7	Pk	35.2	-23.7	11.8	0	-22.4	-	-	-7	-15.4	18	101	H
3	5.925	-71.97	RMS	35.2	-23.7	11.8	0	-46.67	-27	-21.67	-	-	18	101	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.798868	-71.57	RMS	34.9	-23	11.8	0	-47.87	-27	-20.87	-	-	4	128	V
2	5.924668	-58.72	Pk	35.2	-23.7	11.8	0	-35.42	-	-	-7	-28.42	4	128	V
1	5.925	-59.7	Pk	35.2	-23.7	11.8	0	-36.4	-	-	-7	-29.4	4	128	V
3	5.925	-73.3	RMS	35.2	-23.7	11.8	0	-50	-27	-23	-	-	4	128	V

Pk - Peak detector
RMS - RMS detection

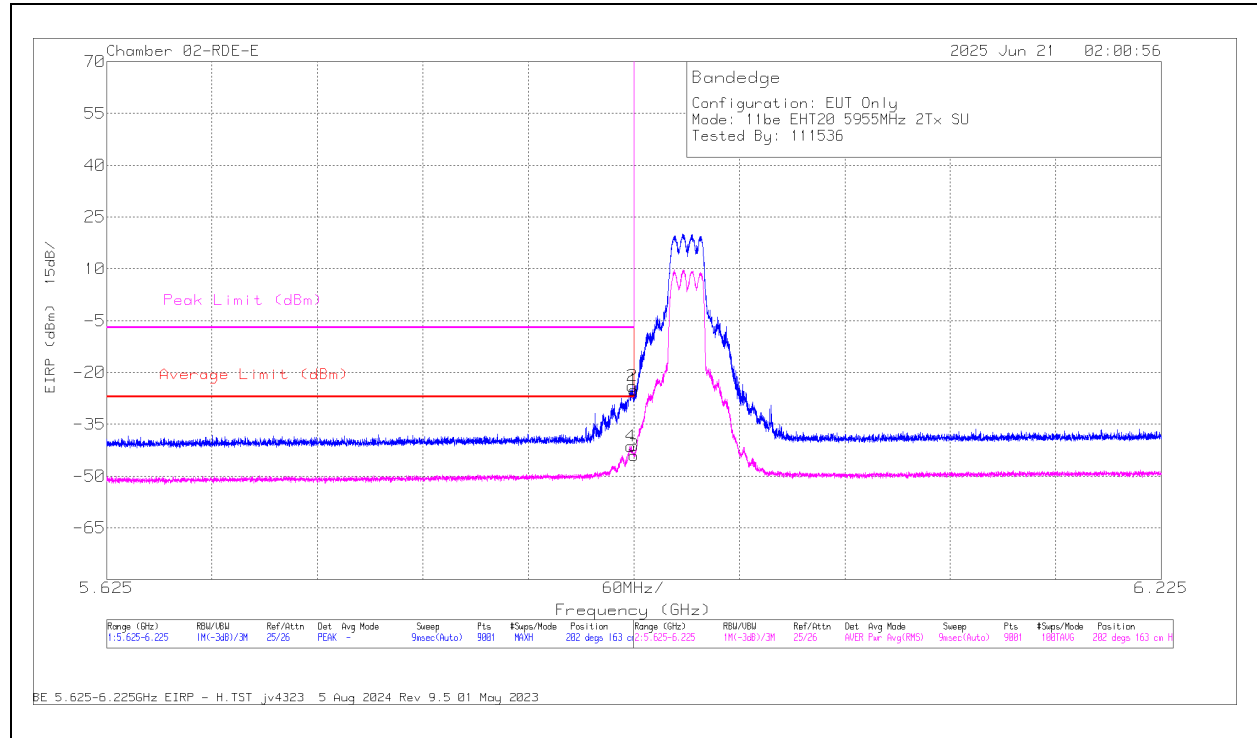
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE

x	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6 + 5	5.923335	-52.01	RMS	35.2	11.8	0.84	-36.55	-40.72	-27	-13.72	-	-	202	163	H
			5.924202	-34.34	Pk	35.2	11.8	0	-36.55	-23.89	-	-	-7	-16.89	202	163	H
			5.925	-35.57	Pk	35.2	11.8	0	-36.51	-25.08	-	-	-7	-18.08	202	163	H
			5.925	-54.72	RMS	35.2	11.8	0.84	-36.51	-43.39	-27	-16.39	-	-	202	163	H
			5.924735	-41.82	Pk	35.2	11.8	0	-36.52	-31.34	-	-	-7	-24.34	226	228	V
			5.924802	-56.95	RMS	35.2	11.8	0.84	-36.52	-45.63	-27	-18.63	-	-	226	228	V
			5.925	-44.65	Pk	35.2	11.8	0	-36.51	-34.16	-	-	-7	-27.16	226	228	V
			5.925	-57.43	RMS	35.2	11.8	0.84	-36.51	-46.1	-27	-19.1	-	-	226	228	V
EHT40 (SU Mode)	5965	6 + 5	5.923335	-40.3	RMS	35.3	11.8	0.97	-37.71	-29.94	-27	-2.94	-	-	16	133	H
			5.924068	-22.64	Pk	35.3	11.8	0	-37.7	-13.24	-	-	-7	-6.24	16	133	H
			5.925	-27.17	Pk	35.3	11.8	0	-37.72	-17.79	-	-	-7	-10.79	16	133	H
			5.925	-42.84	RMS	35.3	11.8	0.97	-37.72	-32.49	-27	-5.49	-	-	16	133	H
			5.920868	-53.03	RMS	35.2	11.8	0.97	-37.71	-42.77	-27	-15.77	-	-	45	144	V
			5.920935	-34.51	Pk	35.2	11.8	0	-37.71	-25.22	-	-	-7	-18.22	45	144	V
			5.925	-38.03	Pk	35.3	11.8	0	-37.72	-28.65	-	-	-7	-21.65	45	144	V
			5.925	-53.03	RMS	35.3	11.8	0.97	-37.72	-42.68	-27	-15.68	-	-	45	144	V
EHT80 (SU Mode)	5985	6 + 5	5.921135	-24.55	Pk	35.2	11.8	0	-36.53	-14.08	-	-	-7	-7.08	153	113	H
			5.924668	-41.18	RMS	35.2	11.8	1.07	-36.53	-29.64	-27	-2.64	-	-	153	113	H
			5.925	-26.62	Pk	35.2	11.8	0	-36.51	-16.13	-	-	-7	-9.13	153	113	H
			5.925	-42.1	RMS	35.2	11.8	1.07	-36.51	-30.54	-27	-3.54	-	-	153	113	H
			5.924602	-54.96	RMS	35.2	11.8	1.07	-36.53	-43.42	-27	-16.42	-	-	222	159	V
			5.924735	-38.13	Pk	35.2	11.8	0	-36.52	-27.65	-	-	-7	-20.65	222	159	V
			5.925	-38.01	Pk	35.2	11.8	0	-36.51	-27.52	-	-	-7	-20.52	222	159	V
			5.925	-56.72	RMS	35.2	11.8	1.07	-36.51	-45.16	-27	-18.16	-	-	222	159	V
EHT160 (SU Mode)	6025	6 + 5	5.901468	-21.31	Pk	35.2	11.8	0	-37.66	-11.97	-	-	-7	-4.97	324	132	H
			5.902468	-40.6	RMS	35.2	11.8	1.16	-37.64	-30.08	-27	-3.08	-	-	324	132	H
			5.925	-29.32	Pk	35.3	11.8	0	-37.72	-19.94	-	-	-7	-12.94	324	132	H
			5.925	-44.26	RMS	35.3	11.8	1.16	-37.72	-33.72	-27	-6.72	-	-	324	132	H
			5.898868	-55.21	RMS	35.2	11.8	1.16	-37.64	-44.69	-27	-17.69	-	-	36	193	V
			5.900935	-36.01	Pk	35.2	11.8	0	-37.66	-26.67	-	-	-7	-19.67	36	193	V
			5.925	-41.55	Pk	35.3	11.8	0	-37.72	-32.17	-	-	-7	-25.17	36	193	V
			5.925	-56.77	RMS	35.3	11.8	1.16	-37.72	-46.23	-27	-19.23	-	-	36	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

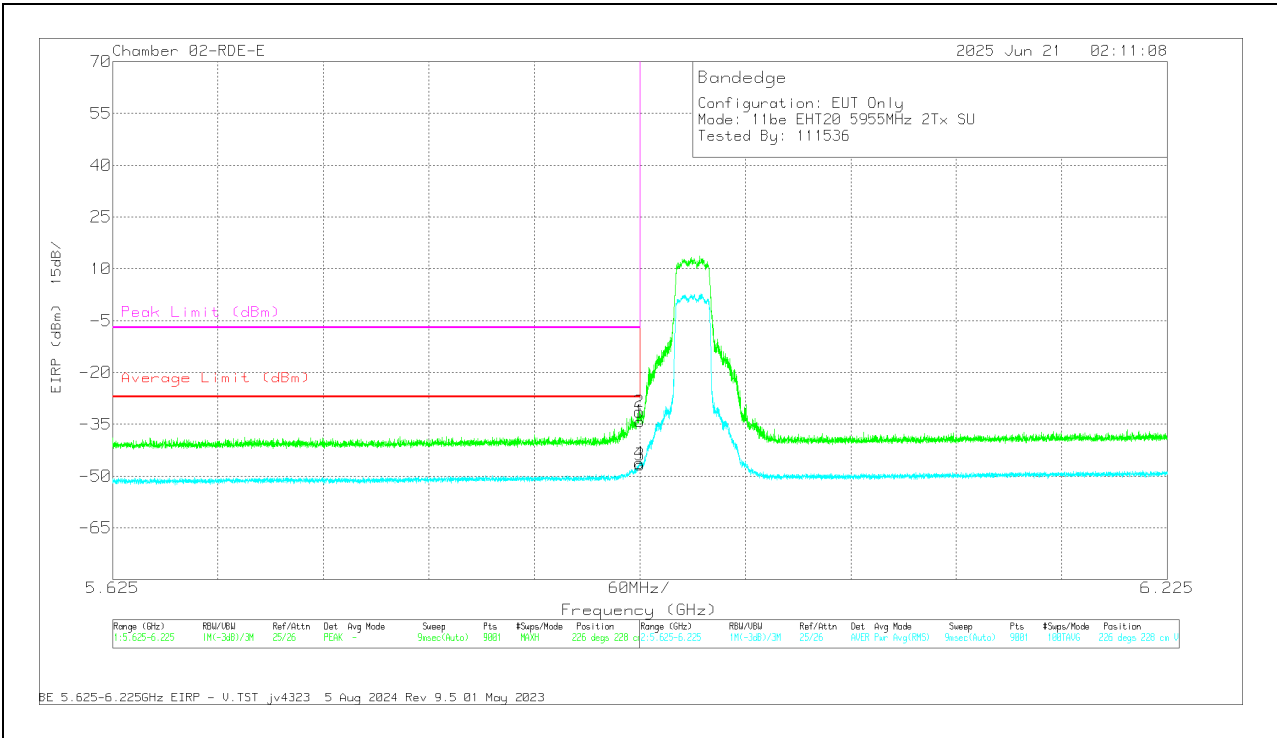
RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU Mode**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.923335	-52.01	RMS	35.2	11.8	0.84	-36.55	-40.72	-27	-13.72	-	-	202	163	H
2	5.924202	-34.34	Pk	35.2	11.8	0	-36.55	-23.89	-	-	-7	-16.89	202	163	H
1	5.925	-35.57	Pk	35.2	11.8	0	-36.51	-25.08	-	-	-7	-18.08	202	163	H
3	5.925	-54.72	RMS	35.2	11.8	0.84	-36.51	-43.39	-27	-16.39	-	-	202	163	H

- Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Motor Reading (dBm)	Det	9479h ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Altitude (dBm)	Height (dBm)	Polarity
2	5.924735	-41.82	Pk	35.2	11.8	0	-36.52	-31.34	-	-	-7	-24.34	226	228	V
4	5.924802	-56.95	RMS	35.2	11.8	0.84	-36.52	-45.63	-27	-18.63	-	-	226	228	V
1	5.925	-44.65	Pk	35.2	11.8	0	-36.51	-34.16	-	-	-7	-27.16	226	228	V
3	5.925	-57.43	RMS	35.2	11.8	0.84	-36.51	-46.1	-27	-19.1	-	-	226	228	V

Pk - Peak detector
RMS - RMS detection

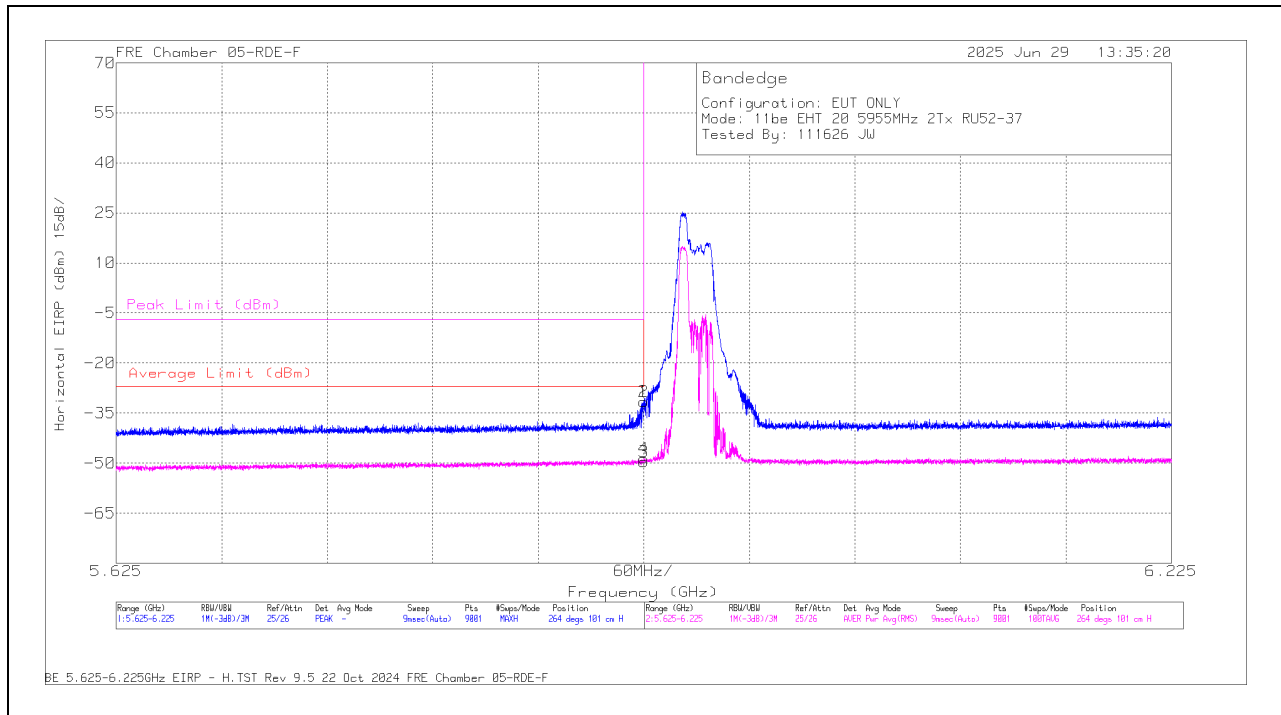
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 52 / Index 37)	5955	6+5	5.925	-41.29	Pk	35.4	11.8	0	-37.5	-31.59	-	-	-7	-24.59	264	101	H
			5.924802	-41.28	Pk	35.4	11.8	0	-37.5	-31.58	-	-	-7	-24.58	264	101	H
			5.925	-59.38	RMS	35.4	11.8	0	-37.5	-49.68	-27	-22.68	-	-	264	101	H
			5.924935	-58.39	RMS	35.4	11.8	0	-37.5	-48.69	-27	-21.69	-	-	264	101	H
			5.925	-50.11	Pk	35.4	11.8	0	-37.5	-40.41	-	-	-7	-33.41	351	287	V
			5.879135	-47.35	Pk	35.4	11.8	0	-37.58	-37.73	-	-	-7	-30.73	351	287	V
			5.925	-61.23	RMS	35.4	11.8	0	-37.5	-51.53	-27	-24.53	-	-	351	287	V
EHT40 (RU 52 / Index 37)	5965	6+5	5.902135	-60.02	RMS	35.4	11.8	0	-37.55	-50.37	-27	-23.37	-	-	351	287	V
			5.913601	-45.44	Pk	35.2	11.8	0	-35.01	-33.45	-	-	-7	-26.45	145	119	H
			5.914735	-59.21	RMS	35.2	11.8	0	-34.96	-47.17	-27	-20.17	-	-	145	119	H
			5.925	-48.14	Pk	35.3	11.8	0	-34.61	-35.65	-	-	-7	-28.65	145	119	H
			5.925	-60.86	RMS	35.3	11.8	0	-34.61	-48.37	-27	-21.37	-	-	145	119	H
			5.773401	-48.13	Pk	34.9	11.8	0	-35.38	-36.81	-	-	-7	-29.81	216	136	V
			5.878068	-60.9	RMS	35.1	11.8	0	-34.67	-48.67	-27	-21.67	-	-	216	136	V
EHT80 (RU 26 / Index 0)	5985	6+5	5.925	-51.35	Pk	35.3	11.8	0	-34.61	-38.86	-	-	-7	-31.86	216	136	V
			5.925	-61.61	RMS	35.3	11.8	0	-34.61	-49.12	-27	-22.12	-	-	216	136	V
			5.923735	-68.77	RMS	35.2	11.8	0.09	-23.35	-45.03	-27	-18.03	-	-	156	223	H
			5.924735	-44.81	Pk	35.2	11.8	0	-23.36	-21.17	-	-	-7	-14.17	156	223	H
			5.925	-44.99	Pk	35.2	11.8	0	-23.36	-21.35	-	-	-7	-14.35	156	223	H
			5.925	-73.02	RMS	35.2	11.8	0.09	-23.36	-49.29	-27	-22.29	-	-	156	223	H
			5.908068	-72.98	RMS	35.2	11.8	0.09	-23.31	-49.2	-27	-22.2	-	-	350	256	V
	6025	6+5	5.922401	-61.2	Pk	35.2	11.8	0	-23.31	-37.51	-	-	-7	-30.51	350	256	V
			5.925	-63.14	Pk	35.2	11.8	0	-23.36	-39.5	-	-	-7	-32.5	350	256	V
			5.925	-73.88	RMS	35.2	11.8	0.09	-23.36	-50.15	-27	-23.15	-	-	350	256	V
			5.923001	-60.05	RMS	35.3	11.8	0	-34.5	-47.45	-27	-20.45	-	-	326	201	H
			5.923801	-44.8	Pk	35.3	11.8	0	-34.6	-32.3	-	-	-7	-25.3	326	201	H
			5.925	-45.84	Pk	35.3	11.8	0	-34.61	-33.35	-	-	-7	-26.35	326	201	H
EHT160 (RU 52 / Index 37)	6025	6+5	5.925	-61.56	RMS	35.3	11.8	0	-34.61	-49.07	-27	-22.07	-	-	326	201	H
			5.901001	-48.57	Pk	35.2	11.8	0	-34.98	-36.55	-	-	-7	-29.55	33	223	V
			5.919801	-60.91	RMS	35.3	11.8	0	-34.67	-48.48	-27	-21.48	-	-	33	223	V
			5.925	-51.71	Pk	35.3	11.8	0	-34.61	-39.22	-	-	-7	-32.22	33	223	V
			5.925	-61.49	RMS	35.3	11.8	0	-34.61	-49	-27	-22	-	-	33	223	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

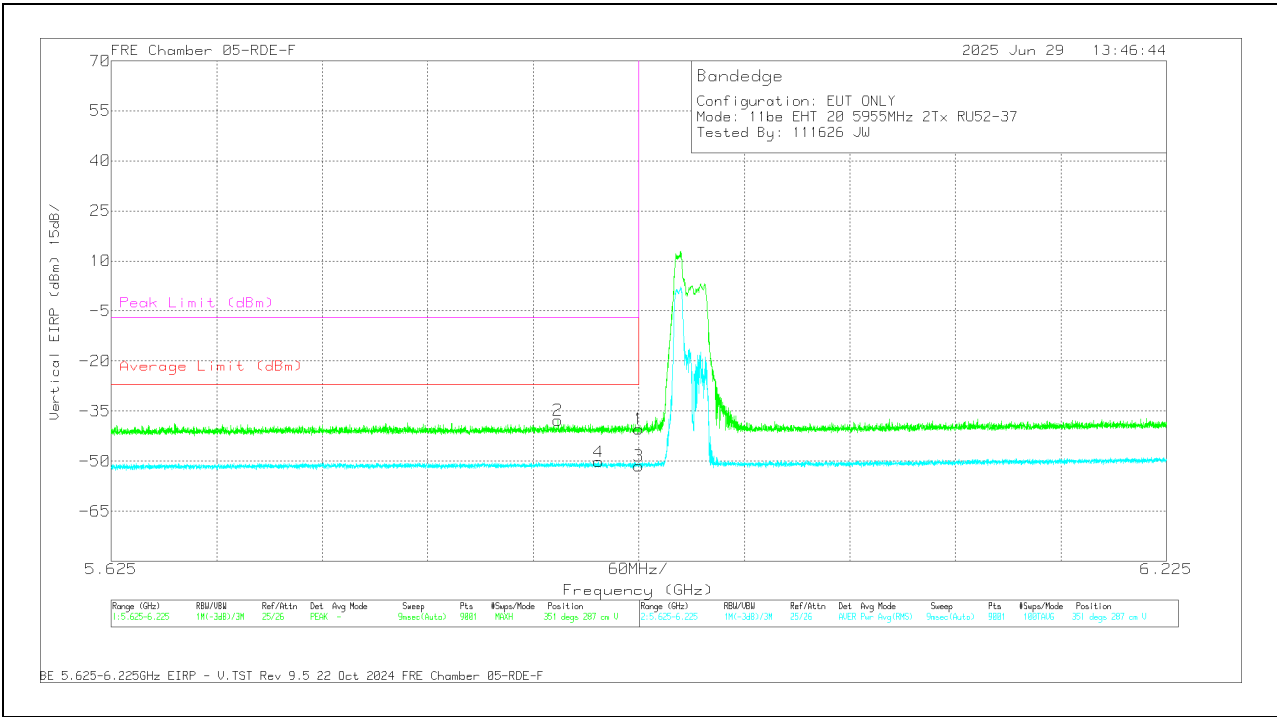
RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: 52-Tones, RU Index 37**BANDEDGE (LOW CHANNEL / 5955MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.925	-41.29	PK	35.4	11.8	0	-37.5	-31.59	-	-	-7	-24.59	264	101	H
2	5.924802	-41.28	PK	35.4	11.8	0	-37.5	-31.58	-	-	-7	-24.58	264	101	H
3	5.925	-59.38	RMS	35.4	11.8	0	-37.5	-49.68	-27	-22.68	-	-	264	101	H
4	5.924935	-58.39	RMS	35.4	11.8	0	-37.5	-48.69	-27	-21.69	-	-	264	101	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.925	-50.11	Pk	35.4	11.8	0	-37.5	-40.41	-	-	-7	-33.41	351	287	V
2	5.879135	-47.35	Pk	35.4	11.8	0	-37.58	-37.73	-	-	-7	-30.73	351	287	V
3	5.925	-61.23	RMS	35.4	11.8	0	-37.5	-51.53	-27	-24.53	-	-	351	287	V
4	5.902135	-60.02	RMS	35.4	11.8	0	-37.55	-50.37	-27	-23.37	-	-	351	287	V

Pk - Peak detector
RMS - RMS detection

1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS

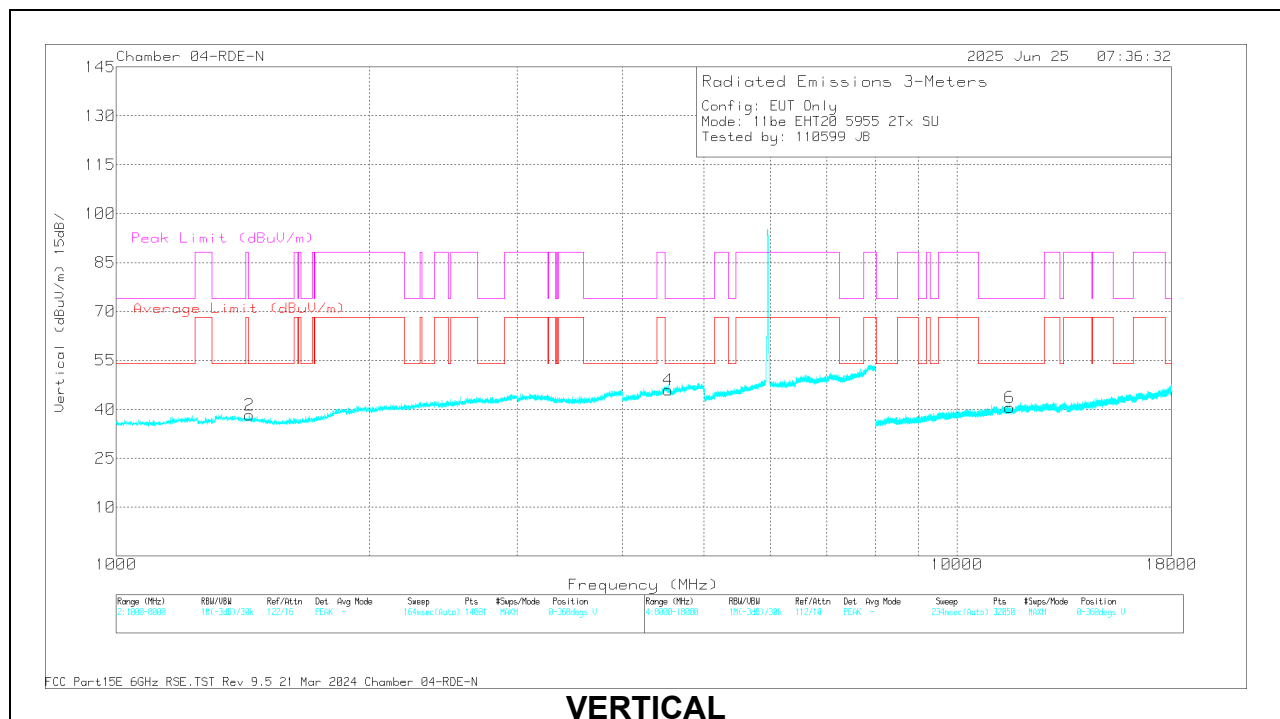
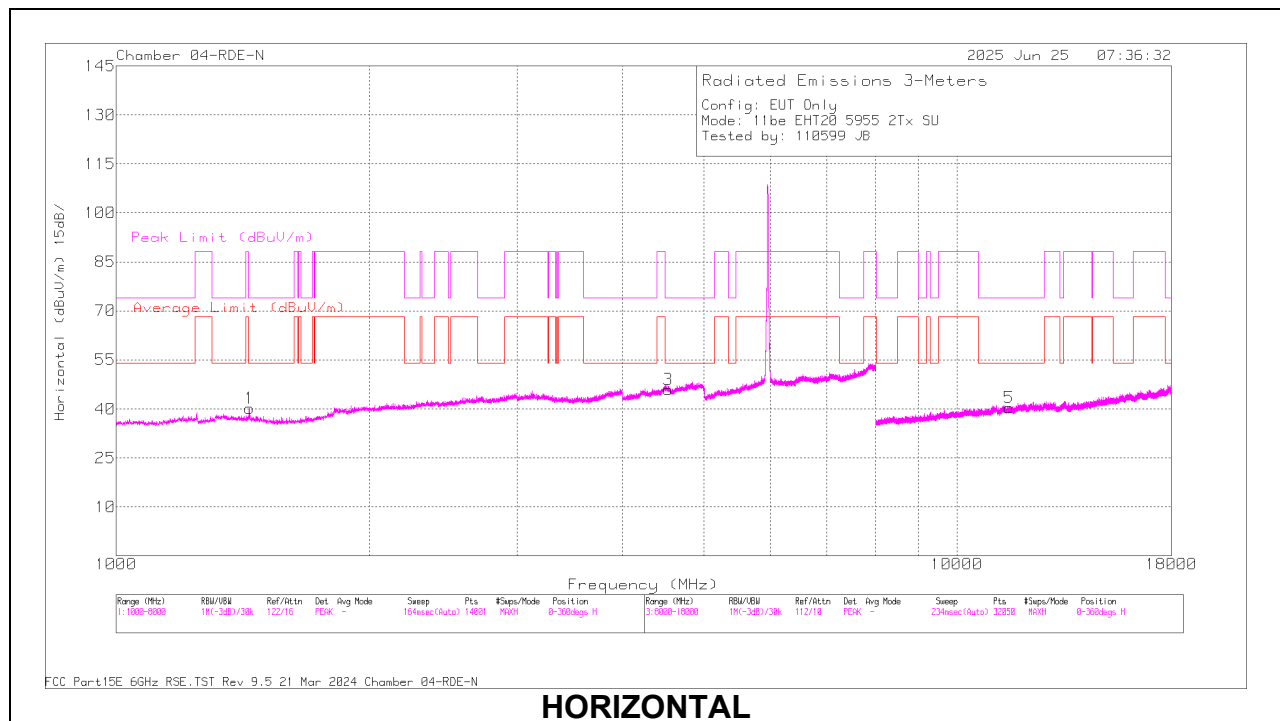
20MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5955	6 + 5	* 1.439953	49.19	PK-U	28.5	-27.33	0	50.36	-	-	74	-23.64	28	225	H
			* 1.439916	39.99	ADR	28.5	-27.33	0.13	41.29	54	-12.71	-	-	28	225	H
			* 4.52878	46.6	PK-U	33.9	-25.07	0	55.43	-	-	74	-18.57	125	322	H
			* 4.530742	35.06	ADR	33.9	-25.06	0.13	44.03	54	-9.97	-	-	125	322	H
			* 1.440104	48.24	PK-U	28.5	-27.33	0	49.41	-	-	74	-24.59	14	373	V
			* 1.439998	37.54	ADR	28.5	-27.33	0.13	38.84	54	-15.16	-	-	14	373	V
			* 4.525551	46.75	PK-U	33.9	-25.03	0	55.62	-	-	74	-18.38	286	164	V
			* 4.532319	35.12	ADR	33.9	-25.13	0.13	44.02	54	-9.98	-	-	286	164	V
			* 11.55093	56.27	PK-U	38.4	-44.41	0	50.26	-	-	74	-23.74	15	111	H
			* 11.554852	44.34	ADR	38.4	-44.36	0.13	38.51	54	-15.49	-	-	15	111	H
			* 11.55463	56.1	PK-U	38.4	-44.36	0	50.14	-	-	74	-23.86	304	361	V
			* 11.556792	44.81	ADR	38.4	-44.42	0.13	38.92	54	-15.08	-	-	304	361	V
	6175	6 + 5	* 4.644136	46.58	PK-U	34.1	-24.56	0	56.12	-	-	74	-17.88	144	387	H
			* 4.648421	35.07	ADR	34.1	-24.58	0.13	44.72	54	-9.28	-	-	144	387	H
			* 4.631557	46.65	PK-U	34	-24.57	0	56.08	-	-	74	-17.92	203	392	V
			* 4.646733	35.2	ADR	34.1	-24.59	0.13	44.84	54	-9.16	-	-	203	392	V
			1.807497	34.17	ADR	30.4	-27.12	0.13	37.58	68.2	-30.62	-	-	331	145	V
			1.807511	45.61	PK-U	30.4	-27.12	0	48.89	-	-	88.2	-39.31	228	221	H
			1.818396	34.46	ADR	30.6	-27.07	0.13	38.12	68.2	-30.08	-	-	228	221	H
			1.829373	45.57	PK-U	30.7	-26.96	0	49.31	-	-	88.2	-38.89	331	145	V
			12.901878	56.11	PK-U	39	-43.87	0	51.24	-	-	88.2	-36.96	135	225	H
			12.909424	44.29	ADR	39	-43.92	0.13	39.5	68.2	-28.7	-	-	135	225	H
			12.912139	55.53	PK-U	39	-43.88	0	50.65	-	-	88.2	-37.55	276	207	V
			12.916178	44.32	ADR	39	-43.78	0.13	39.67	68.2	-28.53	-	-	276	207	V
	6415	6 + 5	* 1.72004	45.97	PK-U	29.3	-27.24	0	48.03	-	-	74	-25.97	320	233	H
			* 1.709195	33.86	ADR	29.1	-27.17	0.13	35.92	54	-18.08	-	-	320	233	H
			* 2.806931	46.26	PK-U	32.4	-25.98	0	52.68	-	-	74	-21.32	5	193	H
			* 2.818579	34.57	ADR	32.4	-25.92	0.13	41.18	54	-12.82	-	-	5	193	H
			* 1.695007	46.39	PK-U	29	-27.13	0	48.26	-	-	74	-25.74	51	299	V
			* 1.69553	33.96	ADR	29	-27.15	0.13	35.94	54	-18.06	-	-	51	299	V
			* 2.794166	46.22	PK-U	32.4	-26.09	0	52.53	-	-	74	-21.47	344	137	V
			* 2.823998	34.59	ADR	32.4	-25.99	0.13	41.13	54	-12.87	-	-	344	137	V
			10.202651	45.29	ADR	37.7	-45	0.13	38.12	68.2	-30.08	-	-	1	200	V
			10.229921	57	PK-U	37.8	-45.11	0	49.69	-	-	88.2	-38.51	1	200	V
			10.239885	56.15	PK-U	37.8	-45.33	0	48.62	-	-	88.2	-39.58	223	216	H
			10.251569	44.97	ADR	37.8	-45.46	0.13	37.44	68.2	-30.76	-	-	223	216	H
11be (Partial RU Mode / Highest PSD)	5955 (52T)	6 + 5	* 1.439945	47.29	PK-U	28.5	-27.33	0	48.46	-	-	74	-25.54	271	204	H
			* 1.440077	38.21	ADR	28.5	-27.33	0	39.38	54	-14.62	-	-	271	204	H
			* 2.366481	46.07	PK-U	31.9	-26.53	0	51.44	-	-	74	-22.56	106	181	H
			* 2.377049	34.66	ADR	32	-26.63	0	40.03	54	-13.97	-	-	106	181	H
			* 1.439722	48.87	PK-U	28.5	-27.33	0	50.04	-	-	74	-23.96	132	202	V
			* 1.440059	41.15	ADR	28.5	-27.33	0	42.32	54	-11.68	-	-	132	202	V
			* 2.375437	46.01	PK-U	32	-26.61	0	51.4	-	-	74	-22.6	82	217	V
			* 2.348219	34.73	ADR	31.8	-26.59	0	39.94	54	-14.06	-	-	82	217	V
			9.641011	56.63	PK-U	37.2	-45.31	0	48.52	-	-	88.2	-39.68	257	200	H
			9.651705	45.13	ADR	37.2	-45.38	0	36.95	68.2	-31.25	-	-	357	126	V
			9.65614	44.95	ADR	37.2	-45.47	0	36.68	68.2	-31.52	-	-	257	200	H
			9.662745	56.73	PK-U	37.2	-45.52	0	48.41	-	-	88.2	-39.79	357	126	V
	6175 (52T)	6 + 5	1.892017	62.19	PK-U	31.2	-50.27	0	43.12	-	-	88.2	-45.08	0	200	H
			1.895003	50.27	ADR	31.3	-50.28	0	31.29	68.2	-36.91	-	-	0	200	H
			3.057388	59.02	PK-U	33.1	-48.41	0	43.71	-	-	88.2	-44.49	0	200	H
			3.089549	46.9	ADR	33.1	-48.19	0	31.81	68.2	-36.39	-	-	0	200	H
			1.890986	61.7	PK-U	31.2	-50.26	0	42.64	-	-	88.2	-45.56	0	101	V
			1.895452	50.21	ADR	31.3	-50.28	0	31.23	68.2	-36.97	-	-	0	101	V
			3.0621	58.67	PK-U	33.1	-48.41	0	43.36	-	-	88.2	-44.84	0	101	V
			3.055937	46.99	ADR	33.1	-48.4	0	31.69	68.2	-36.51	-	-	0	101	V
			* 11.030617	55.99	PK-U	37.6	-44.89	0	48.7	-	-	74	-25.3	0	200	H
			* 11.032556	44.72	ADR	37.6	-44.83	0	37.49	54	-16.51	-	-	0	200	H
			* 11.029913	56.32	PK-U	37.6	-44.91	0	49.01	-	-	74	-24.99	0	101	V
			* 11.048275	44.49	ADR	37.6	-44.29	0	37.8	54	-16.2	-	-	0	101	V
	6415 (52T)	6 + 5	2.002014	60.84	PK-U	32.1	-49.78	0	43.16	-	-	88.2	-45.04	0	200	H
			2.003837	49.41	ADR	32.1	-49.75	0	31.76	68.2	-36.44	-	-	0	200	H
			2.935797	60.1	PK-U	32.8	-48.95	0	43.95	-	-	88.2	-44.25	0	101	H
			2.930389	47.63	ADR	32.8	-48.98	0	31.45	68.2	-36.75	-	-	0	101	H
			2.004334	60.9	PK-U	32.1	-49.75	0	43.25	-	-	88.2	-44.95	0	200	V
			2.00361	49.71	ADR	32.1	-49.75	0	32.06	68.2	-36.14	-	-	0	200	V
			2.942048	59.47	PK-U	32.8	-49.01	0	43.26	-	-	88.2	-44.94	281	101	V
			2.945817	47.86	ADR	32.8	-49.01	0	31.65	68.2	-36.55	-	-	281	101	V
			11.999135	55.41	PK-U	39	-43.62	0	50.79	-	-	74	-23.21	0	199	H
			11.997819	43.81	ADR	39	-43.59	0	39.22	54	-14.78	-	-	0	199	H
			11.969394	55.56	PK-U	39	-43.48	0	51.08	-	-	74	-22.92	0	199	V
			11.985869	43.69	ADR	39	-43.42	0	39.27	54	-14.73	-	-	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5955MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.439953	49.19	PK-U	28.5	0	-27.33	50.36	-	-	74	-23.64	28	225	H
* 1.439916	39.99	ADR	28.5	0.13	-27.33	41.29	54	-12.71	-	-	28	225	H
* 4.52878	46.6	PK-U	33.9	0	-25.07	55.43	-	-	74	-18.57	125	322	H
* 4.530742	35.06	ADR	33.9	0.13	-25.06	44.03	54	-9.97	-	-	125	322	H
* 1.440104	48.24	PK-U	28.5	0	-27.33	49.41	-	-	74	-24.59	14	373	V
* 1.439998	37.54	ADR	28.5	0.13	-27.33	38.84	54	-15.16	-	-	14	373	V
* 4.525551	46.75	PK-U	33.9	0	-25.03	55.62	-	-	74	-18.38	286	164	V
* 4.532319	35.12	ADR	33.9	0.13	-25.13	44.02	54	-9.98	-	-	286	164	V
* 11.55093	56.27	PK-U	38.4	0	-44.41	50.26	-	-	74	-23.74	15	111	H
* 11.554852	44.34	ADR	38.4	0.13	-44.36	38.51	54	-15.49	-	-	15	111	H
* 11.55463	56.1	PK-U	38.4	0	-44.36	50.14	-	-	74	-23.86	304	361	V
* 11.556792	44.81	ADR	38.4	0.13	-44.42	38.92	54	-15.08	-	-	304	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

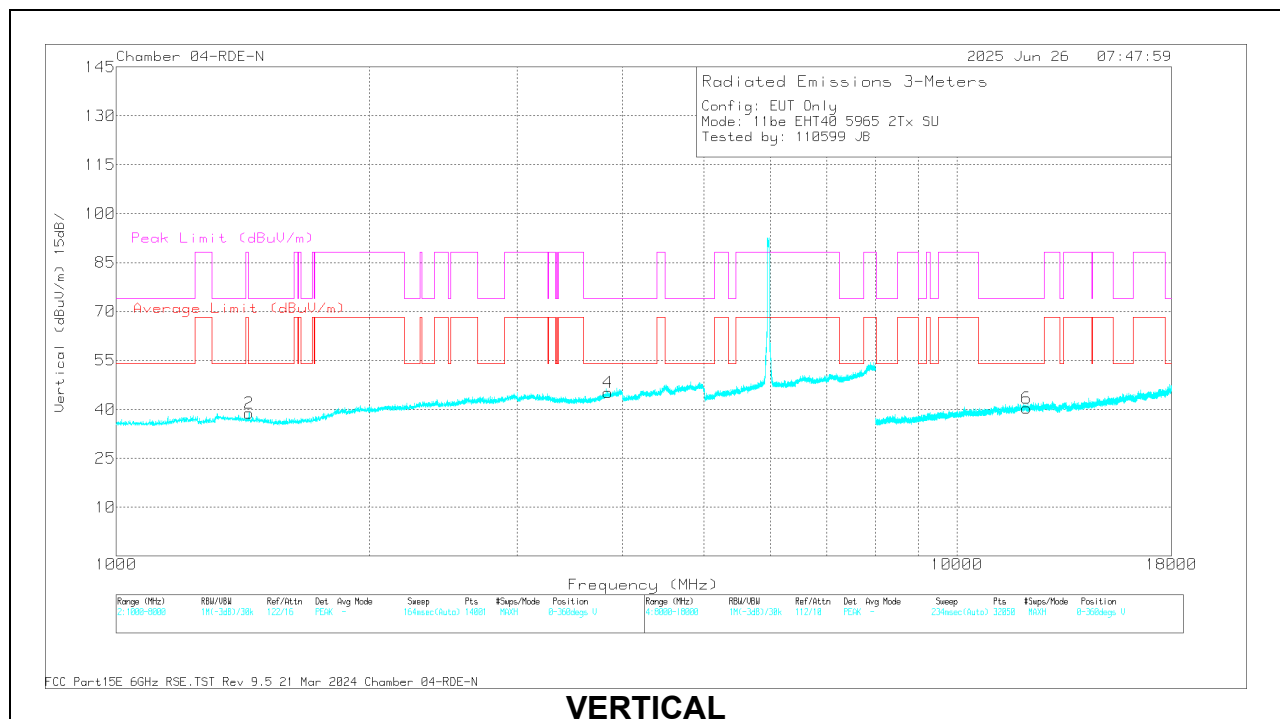
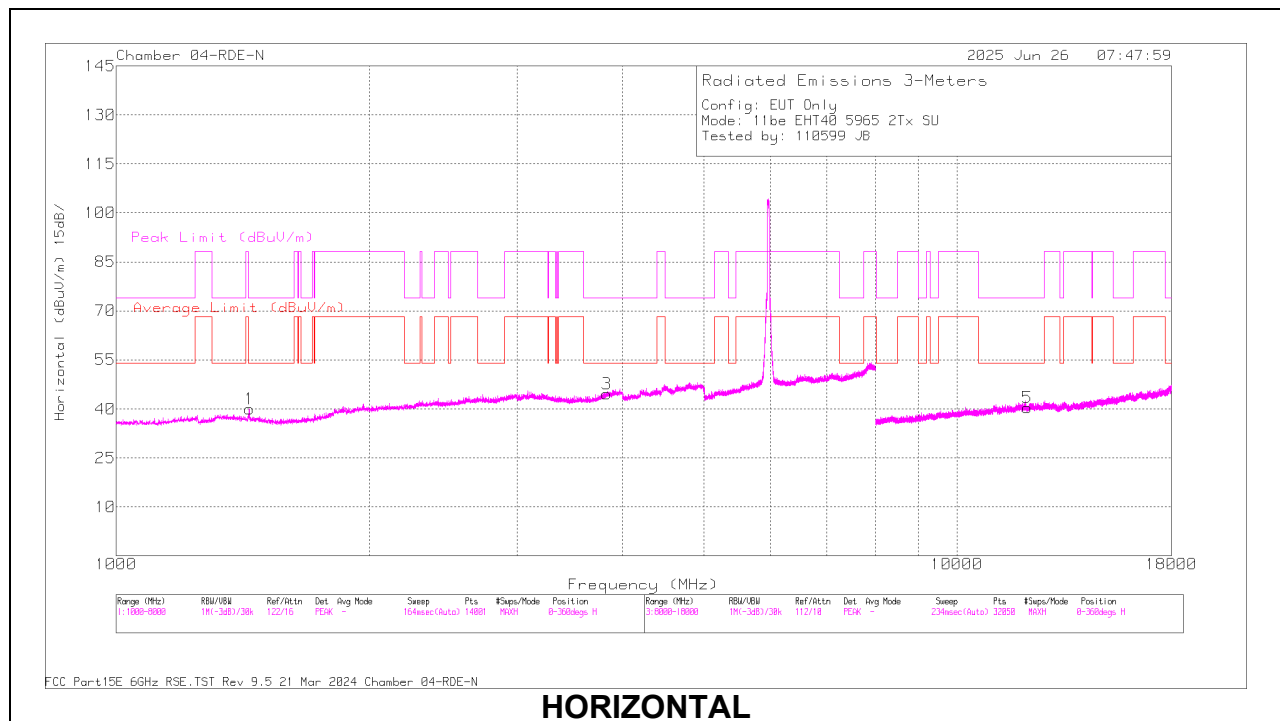
40MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5965	6 + 5	* 1.439655	48.6	PK-U	28.5	-27.33	0	49.77	-	-	74	-24.23	245	177	H
			* 1.440169	38.22	ADR	28.5	-27.33	0.23	39.62	54	-14.38	-	-	245	177	H
			* 3.839398	46.1	PK-U	33.8	-25.21	0	54.69	-	-	74	-19.31	12	183	H
			* 3.817494	34.21	ADR	33.7	-25.39	0.23	42.75	54	-11.25	-	-	12	183	H
			* 1.439666	48.04	PK-U	28.5	-27.33	0	49.21	-	-	74	-24.79	240	177	V
			* 1.440117	37.85	ADR	28.5	-27.33	0.23	39.25	54	-14.75	-	-	240	177	V
			* 3.847853	45.77	PK-U	33.8	-25.25	0	54.32	-	-	74	-19.68	279	138	V
			* 3.861997	34.39	ADR	33.8	-25.32	0.23	43.1	54	-10.9	-	-	279	138	V
			* 12.123156	56.41	PK-U	38.9	-44.34	0	50.97	-	-	74	-23.03	192	279	H
			* 12.140032	44.4	ADR	38.9	-44.25	0.23	39.28	54	-14.72	-	-	192	279	H
			* 12.116791	55.66	PK-U	38.9	-44.37	0	50.19	-	-	74	-23.81	330	122	V
			* 12.100826	44.62	ADR	38.9	-44.39	0.23	39.36	54	-14.64	-	-	330	122	V
			* 1.439828	48.29	PK-U	28.5	-27.33	0	49.46	-	-	74	-24.54	256	170	H
			* 1.440165	38.69	ADR	28.5	-27.33	0.23	40.09	54	-13.91	-	-	256	170	H
			* 1.439891	48.19	PK-U	28.5	-27.33	0	49.36	-	-	74	-24.64	279	194	V
			* 1.440099	38.11	ADR	28.5	-27.33	0.23	39.51	54	-14.49	-	-	279	194	V
	6165	6 + 5	* 15.948048	54.96	PK-U	40.5	-42.94	0	52.52	-	-	74	-21.48	357	196	H
			* 15.938128	43.65	ADR	40.5	-42.96	0.23	41.42	54	-12.58	-	-	357	196	H
			* 15.949298	55.21	PK-U	40.5	-42.92	0	52.79	-	-	74	-21.21	170	147	V
			* 15.913339	43.66	ADR	40.5	-42.94	0.23	41.45	54	-12.55	-	-	170	147	V
			* 5.279304	45.79	PK-U	34.4	-24.31	0	55.88	-	-	88.2	-32.32	5	109	H
			* 5.293209	33.68	ADR	34.4	-24.32	0.23	43.99	68.2	-24.21	-	-	5	109	H
			* 5.303903	45.18	PK-U	34.4	-24.38	0	55.2	-	-	88.2	-33	357	227	V
			* 5.308614	33.59	ADR	34.4	-24.31	0.23	43.91	68.2	-24.29	-	-	357	227	V
			* 1.439775	48.62	PK-U	28.5	-27.33	0	49.79	-	-	74	-24.21	257	174	H
			* 1.439924	38.64	ADR	28.5	-27.33	0.23	40.04	54	-13.96	-	-	257	174	H
			* 5.412044	45.74	PK-U	34.4	-23.94	0	56.2	-	-	74	-17.8	88	244	H
			* 5.430269	34.05	ADR	34.5	-24.02	0.23	44.76	54	-9.24	-	-	88	244	H
	6405	6 + 5	* 1.440184	47.27	PK-U	28.5	-27.33	0	48.44	-	-	74	-25.56	267	375	V
			* 1.440201	36.83	ADR	28.5	-27.33	0.23	38.23	54	-15.77	-	-	267	375	V
			* 5.41942	45.72	PK-U	34.4	-23.99	0	56.13	-	-	74	-17.87	11	286	V
			* 5.418352	33.86	ADR	34.4	-23.93	0.23	44.56	54	-9.44	-	-	11	286	V
			* 16.992658	56.09	PK-U	40.6	-42.83	0	53.86	-	-	88.2	-34.34	232	236	H
			* 16.996269	44.78	ADR	40.6	-42.82	0.23	42.79	68.2	-25.41	-	-	357	148	V
			* 16.997169	44.79	ADR	40.6	-42.85	0.23	42.77	68.2	-25.43	-	-	232	236	H
			* 17.011947	55.88	PK-U	40.6	-42.94	0	53.54	-	-	88.2	-34.66	357	148	V
			* 1.439873	39.75	ADR	28.5	-27.33	0.1	41.02	54	-12.98	-	-	161	195	H
			* 3.937566	45.93	PK-U	33.9	-25.27	0	54.56	-	-	74	-19.44	309	273	H
			* 3.922405	34.01	ADR	33.9	-25.19	0.1	42.82	54	-11.18	-	-	309	273	H
			* 1.439972	48.22	PK-U	28.5	-27.33	0	49.39	-	-	74	-24.61	160	200	V
11be (Partial RU Mode / Highest PSD)	5965 (52T)	6 + 5	* 1.440055	40.23	ADR	28.5	-27.33	0.1	41.5	54	-12.5	-	-	160	200	V
			* 3.93566	46.11	PK-U	33.9	-25.26	0	54.75	-	-	74	-19.25	200	169	V
			* 3.935037	33.99	ADR	33.9	-25.24	0.1	42.75	54	-11.25	-	-	200	169	V
			* 17.22984	57.41	PK-U	40.4	-42.24	0	55.57	-	-	88.2	-32.63	183	242	V
			* 17.226378	44.9	ADR	40.4	-42.19	0.1	43.21	68.2	-24.99	-	-	183	242	V
			* 17.281929	44.93	ADR	40.4	-42.36	0.1	43.07	68.2	-25.13	-	-	357	207	H
			* 17.292902	56.53	PK-U	40.4	-42.28	0	54.65	-	-	88.2	-33.55	357	207	H
			* 2.030002	67.46	PK-U	31.6	-50.87	0	48.19	-	-	88.2	-40.01	114	351	H
			* 2.030403	50.69	ADR	31.6	-50.87	0.1	31.52	68.2	-36.68	-	-	114	351	H
			* 2.032961	50.66	ADR	31.5	-50.83	0.1	31.43	68.2	-36.77	-	-	166	133	V
			* 2.033216	62.08	PK-U	31.5	-50.83	0	42.75	-	-	88.2	-45.45	166	133	V
			* 3.067014	47.08	ADR	33	-48.82	0.1	31.36	68.2	-36.84	-	-	136	232	V
			* 3.068296	58.47	PK-U	33	-48.85	0	42.62	-	-	88.2	-45.58	136	232	V
			* 3.071179	59.04	PK-U	33	-48.89	0	43.15	-	-	88.2	-45.05	119	275	H
			* 3.072043	47.36	ADR	33	-48.86	0.1	31.6	68.2	-36.6	-	-	119	275	H
	6165 (52T)	6 + 5	* 12.333275	44.23	ADR	38.9	-44.07	0.1	39.16	54	-14.84	-	-	12	163	H
			* 12.335404	55.61	PK-U	38.9	-44.08	0	50.43	-	-	74	-23.57	12	163	H
			* 12.335858	55.86	PK-U	38.9	-44.06	0	50.7	-	-	74	-23.3	119	232	V
			* 12.33752	44	ADR	38.9	-44.03	0.1	38.97	54	-15.03	-	-	119	232	V
			* 2.133407	61.64	PK-U	31.6	-50.54	0	42.7	-	-	88.2	-45.5	19	259	H
			* 2.133462	50.11	ADR	31.6	-50.54	0.1	31.27	68.2	-36.93	-	-	313	102	V
			* 2.134028	50.14	ADR	31.6	-50.53	0.1	31.31	68.2	-36.89	-	-	19	259	H
			* 2.134278	61.41	PK-U	31.6	-50.53	0	42.48	-	-	88.2	-45.72	313	102	V
			* 3.197709	47.54	ADR	33.3	-48.5	0.1	32.44	68.2	-35.76	-	-	352	195	H
			* 3.198213	60.07	PK-U	33.3	-48.48	0	44.89	-	-	88.2	-43.31	352	195	H
			* 3.199182	58.81	PK-U	33.3	-48.52	0	43.59	-	-	88.2	-44.61	73	138	V
			* 3.199778	47.46	ADR	33.3	-48.51	0.1	32.35	68.2	-35.85	-	-	73	138	V
			* 12.809235	44.23	ADR	39.3	-44.41	0.1	39.22	68.2	-28.98	-	-	165	326	H
			* 12.810242	55.75	PK-U	39.3	-44.43	0	50.62	-	-	88.2	-37.58	165	326	H
			* 12.81149	44.21	ADR	39.3	-44.42	0.1	39.19	68.2	-29.01	-	-	344	326	V
			* 12.812798	55.81	PK-U	39.3	-44.43	0	50.68	-	-	88.2	-37.52	344	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5965MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.439655	48.6	PK-U	28.5	0	-27.33	49.77	-	-	74	-24.23	245	177	H
* 1.440169	38.22	ADR	28.5	0.23	-27.33	39.62	54	-14.38	-	-	245	177	H
* 3.839398	46.1	PK-U	33.8	0	-25.21	54.69	-	-	74	-19.31	12	183	H
* 3.817494	34.21	ADR	33.7	0.23	-25.39	42.75	54	-11.25	-	-	12	183	H
* 1.439666	48.04	PK-U	28.5	0	-27.33	49.21	-	-	74	-24.79	240	177	V
* 1.440117	37.85	ADR	28.5	0.23	-27.33	39.25	54	-14.75	-	-	240	177	V
* 3.847853	45.77	PK-U	33.8	0	-25.25	54.32	-	-	74	-19.68	279	138	V
* 3.861997	34.39	ADR	33.8	0.23	-25.32	43.1	54	-10.9	-	-	279	138	V
* 12.123156	56.41	PK-U	38.9	0	-44.34	50.97	-	-	74	-23.03	192	279	H
* 12.140032	44.4	ADR	38.9	0.23	-44.25	39.28	54	-14.72	-	-	192	279	H
* 12.116791	55.66	PK-U	38.9	0	-44.37	50.19	-	-	74	-23.81	330	122	V
* 12.100826	44.62	ADR	38.9	0.23	-44.39	39.36	54	-14.64	-	-	330	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

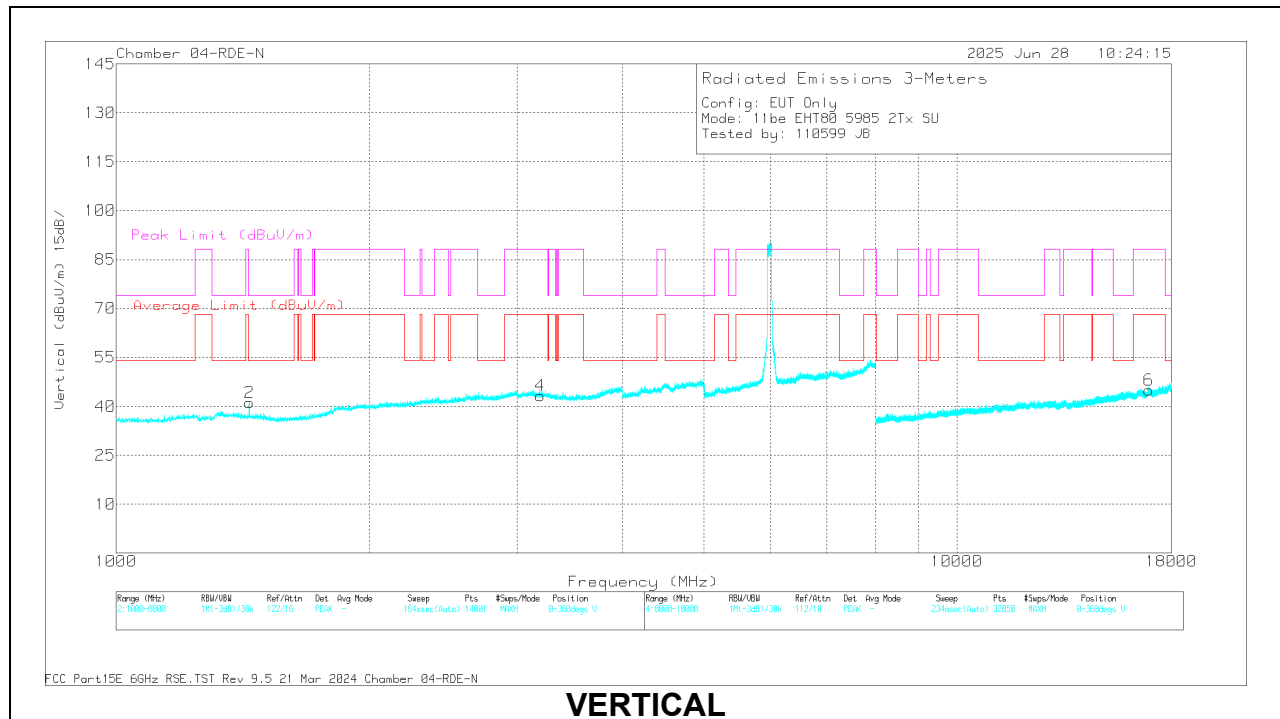
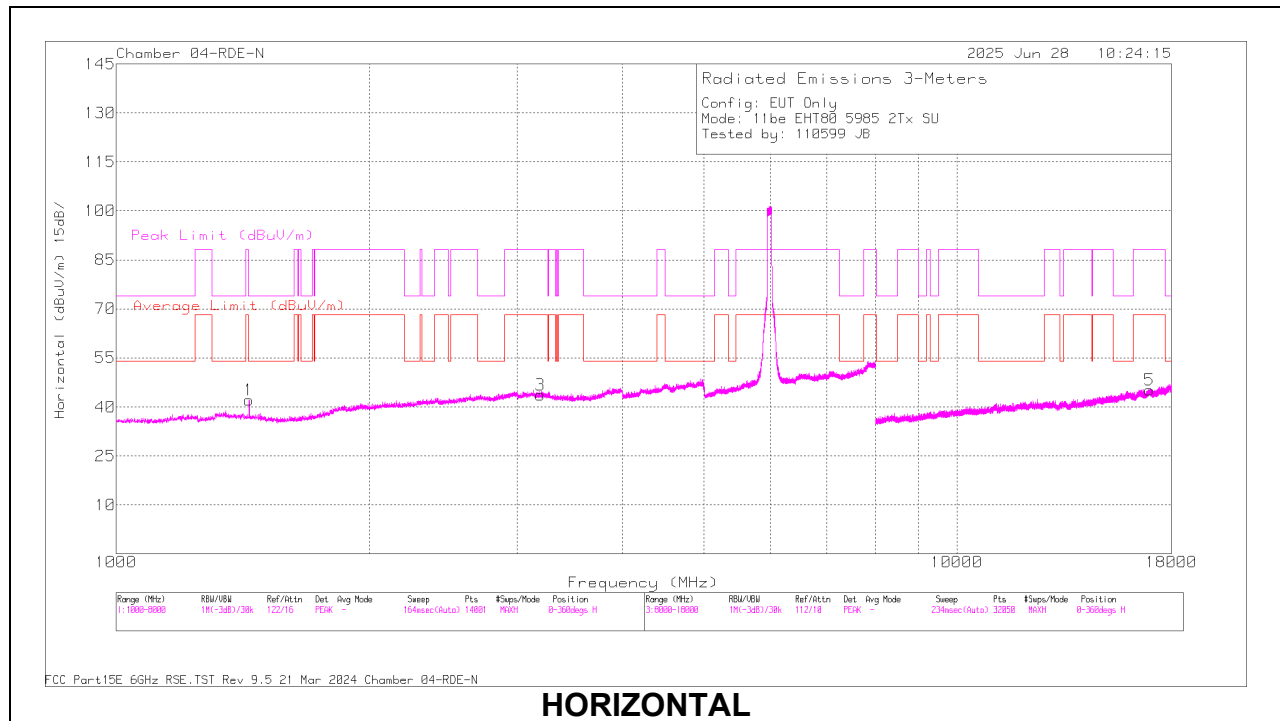
80MHz

UNI-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5985	6 + 5	* 1.440.185	47.24	PK-U	28.5	-27.33	0	48.41	-	-	74	-25.59	167	324	H
			* 1.440085	37.94	ADR	28.5	-27.33	0.41	39.52	54	-14.48	-	-	167	324	H
			* 1.440146	48.55	PK-U	28.5	-27.33	0	49.72	-	-	74	-24.28	132	196	V
			* 1.440089	38.26	ADR	28.5	-27.33	0.41	39.84	54	-14.16	-	-	132	196	V
			3.181636	34.37	ADR	33	-25.4	0.41	42.38	68.2	-25.82	-	-	299	359	H
			3.182944	34.27	ADR	33	-25.43	0.41	42.25	68.2	-25.95	-	-	278	342	V
			3.186307	45.81	PK-U	33	-25.43	0	53.38	-	-	88.2	-34.82	299	359	H
			3.209702	45.68	PK-U	33	-25.45	0	53.23	-	-	88.2	-34.97	278	342	V
			16.904986	56.24	PK-U	40.7	-42.9	0	54.04	-	-	88.2	-34.16	155	118	V
			16.924835	44.51	ADR	40.7	-42.85	0.41	42.77	68.2	-25.43	-	-	155	118	V
			16.947928	56.43	PK-U	40.7	-43.13	0	54	-	-	88.2	-34.2	345	171	H
			16.950626	44.86	ADR	40.7	-43.13	0.41	42.84	68.2	-25.36	-	-	345	171	H
	6145	6 + 5	* 1.440075	48.12	PK-U	28.5	-27.33	0	49.29	-	-	74	-24.71	92	187	H
			* 1.440081	40.31	ADR	28.5	-27.33	0.41	41.89	54	-12.11	-	-	92	187	H
			* 1.440362	47.54	PK-U	28.5	-27.32	0	48.72	-	-	74	-25.28	136	195	V
			* 1.439936	38.05	ADR	28.5	-27.33	0.41	39.63	54	-14.37	-	-	136	195	V
			* 1.494837	56.22	PK-U	38.8	-43.87	0	51.15	-	-	74	-22.85	348	251	H
			* 12.501818	44.14	ADR	38.8	-43.9	0.41	39.45	54	-14.55	-	-	348	251	H
			* 12.472616	55.5	PK-U	38.8	-43.68	0	50.62	-	-	74	-23.38	60	221	V
			* 12.479001	44.12	ADR	38.8	-43.72	0.41	39.61	54	-14.39	-	-	60	221	V
			5.46913	45.99	PK-U	34.5	-23.86	0	56.63	-	-	88.2	-31.57	3	189	H
			5.477098	33.37	ADR	34.5	-23.76	0.41	44.52	68.2	-23.68	-	-	3	189	H
			5.488174	33.35	ADR	34.5	-23.86	0.41	44.4	68.2	-23.8	-	-	3	128	V
			5.515592	45.42	PK-U	34.5	-24.04	0	55.88	-	-	88.2	-32.32	3	128	V
	6385	6 + 5	* 1.439299	46.77	PK-U	28.5	-27.33	0	47.94	-	-	74	-26.06	168	326	H
			* 1.440051	37.24	ADR	28.5	-27.33	0.41	38.82	54	-15.18	-	-	168	326	H
			* 1.440255	46.66	PK-U	28.5	-27.32	0	47.84	-	-	74	-26.16	135	200	V
			* 1.440067	38.37	ADR	28.5	-27.33	0.41	39.95	54	-14.05	-	-	135	200	V
			1.987417	34.31	ADR	31.6	-26.97	0.41	39.35	68.2	-28.85	-	-	42	120	V
			1.991996	46.02	PK-U	31.6	-26.85	0	50.77	-	-	88.2	-37.43	297	244	H
			1.997304	34.33	ADR	31.6	-26.86	0.41	39.48	68.2	-28.72	-	-	297	244	H
			2.016706	46	PK-U	31.6	-26.94	0	50.66	-	-	88.2	-37.54	42	120	V
			9.656996	45.01	ADR	37.2	-45.49	0.41	37.13	68.2	-31.07	-	-	323	233	V
			9.662585	45.07	ADR	37.2	-45.53	0.41	37.15	68.2	-31.05	-	-	3	356	H
			9.669199	56.55	PK-U	37.2	-45.52	0	48.23	-	-	88.2	-39.97	323	233	V
			9.672242	56.55	PK-U	37.2	-45.59	0	48.16	-	-	88.2	-40.04	3	356	H
	5985 (26T)	6 + 5	1.938588	62.33	PK-U	31.5	-50.29	0	43.54	-	-	88.2	-44.66	360	101	H
			1.9466	50.83	ADR	31.5	-50.19	0.09	32.23	68.2	-35.97	-	-	360	101	H
			3.14407	58.67	PK-U	33.5	-47.94	0	44.23	-	-	88.2	-43.97	331	101	H
			3.110816	46.6	ADR	33.2	-48.15	0.09	31.74	68.2	-36.46	-	-	331	101	H
			1.940384	62.59	PK-U	31.5	-50.27	0	43.82	-	-	88.2	-44.38	331	101	V
			1.944632	50.5	ADR	31.5	-50.2	0.09	31.89	68.2	-36.31	-	-	331	101	V
			3.10817	58.35	PK-U	33.1	-48.15	0	43.3	-	-	88.2	-44.9	331	199	V
			3.105601	46.62	ADR	33.1	-48.15	0.09	31.66	68.2	-36.54	-	-	331	199	V
			* 11.091205	56.04	PK-U	37.6	-44.17	0	49.47	-	-	74	-24.53	331	101	H
			* 11.088422	44.43	ADR	37.6	-44.11	0.09	38.01	54	-15.99	-	-	331	101	H
			* 11.091653	55.97	PK-U	37.6	-44.16	0	49.41	-	-	74	-24.59	331	200	V
			* 11.089234	44.41	ADR	37.6	-44.13	0.09	37.97	54	-16.03	-	-	331	200	V
		6 + 5	1.998703	61.37	PK-U	32.1	-49.8	0	43.67	-	-	88.2	-44.53	360	101	H
			1.997694	49.84	ADR	32.1	-49.81	0.09	32.22	68.2	-35.98	-	-	360	101	H
			3.307005	58.25	PK-U	32.8	-47.75	0	43.3	-	-	88.2	-44.9	360	101	H
			3.313524	46.64	ADR	32.8	-47.72	0.09	31.81	68.2	-36.39	-	-	360	101	H
			2.000646	61.79	PK-U	32.1	-49.79	0	44.1	-	-	88.2	-44.1	360	200	V
			1.992051	49.92	ADR	32	-49.81	0.09	32.2	68.2	-36	-	-	360	200	V
			3.313063	58.24	PK-U	32.8	-47.71	0	43.33	-	-	88.2	-44.87	360	101	V
			3.309592	46.62	ADR	32.8	-47.73	0.09	31.78	68.2	-36.42	-	-	360	101	V
			11.905789	54.35	PK-U	38.9	-43.47	0	49.78	-	-	74	-24.22	360	101	H
			11.911312	42.74	ADR	38.9	-43.37	0.09	38.36	54	-15.64	-	-	360	101	H
			11.919755	55.21	PK-U	39	-43.33	0	50.88	-	-	74	-23.12	360	101	V
			11.897101	43.1	ADR	38.9	-43.69	0.09	38.4	54	-15.6	-	-	360	101	V
	6385 (26T)	6 + 5	1.937135	62.25	PK-U	31.5	-50.33	0	43.42	-	-	88.2	-44.78	360	199	H
			1.947853	50.48	ADR	31.4	-50.19	0.09	31.78	68.2	-36.42	-	-	360	199	H
			3.59996	57.86	PK-U	33.8	-47.68	0	43.98	-	-	88.2	-44.22	360	101	H
			3.600111	46.31	ADR	33.8	-47.68	0.09	32.52	54	-21.48	-	-	360	101	H
			1.94056	61.78	PK-U	31.5	-50.27	0	43.01	-	-	88.2	-45.19	360	101	V
			1.94911	50.44	ADR	31.4	-50.19	0.09	31.74	68.2	-36.46	-	-	360	101	V
			3.601098	58.17	PK-U	33.8	-47.69	0	44.28	-	-	74	-29.72	360	101	V
			3.598436	46.43	ADR	33.8	-47.68	0.09	32.64	68.2	-35.56	-	-	360	101	V
			11.517396	55.41	PK-U	38.2	-44.03	0	49.58	-	-	74	-24.42	360	200	H
			11.524395	43.87	ADR	38.2	-43.97	0.09	38.19	54	-15.81	-	-	360	200	H
			11.524779	55.2	PK-U	38.2	-43.98	0	49.42	-	-	74	-24.58	360	200	V
			11.528507	43.66	ADR	38.2	-43.97	0.09	37.98	54	-16.02	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 5985MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.440185	47.24	PK-U	28.5	0	-27.33	48.41	-	-	74	-25.59	167	324	H
* 1.440085	37.94	ADR	28.5	0.41	-27.33	39.52	54	-14.48	-	-	167	324	H
* 1.440146	48.55	PK-U	28.5	0	-27.33	49.72	-	-	74	-24.28	132	196	V
* 1.440089	38.26	ADR	28.5	0.41	-27.33	39.84	54	-14.16	-	-	132	196	V
3.181636	34.37	ADR	33	0.41	-25.4	42.38	68.2	-25.82	-	-	299	359	H
3.182944	34.27	ADR	33	0.41	-25.43	42.25	68.2	-25.95	-	-	278	342	V
3.186307	45.81	PK-U	33	0	-25.43	53.38	-	-	88.2	-34.82	299	359	H
3.209702	45.68	PK-U	33	0	-25.45	53.23	-	-	88.2	-34.97	278	342	V
16.904986	56.24	PK-U	40.7	0	-42.9	54.04	-	-	88.2	-34.16	155	118	V
16.924835	44.51	ADR	40.7	0.41	-42.85	42.77	68.2	-25.43	-	-	155	118	V
16.947928	56.43	PK-U	40.7	0	-43.13	54	-	-	88.2	-34.2	345	171	H
16.950626	44.86	ADR	40.7	0.41	-43.13	42.84	68.2	-25.36	-	-	345	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

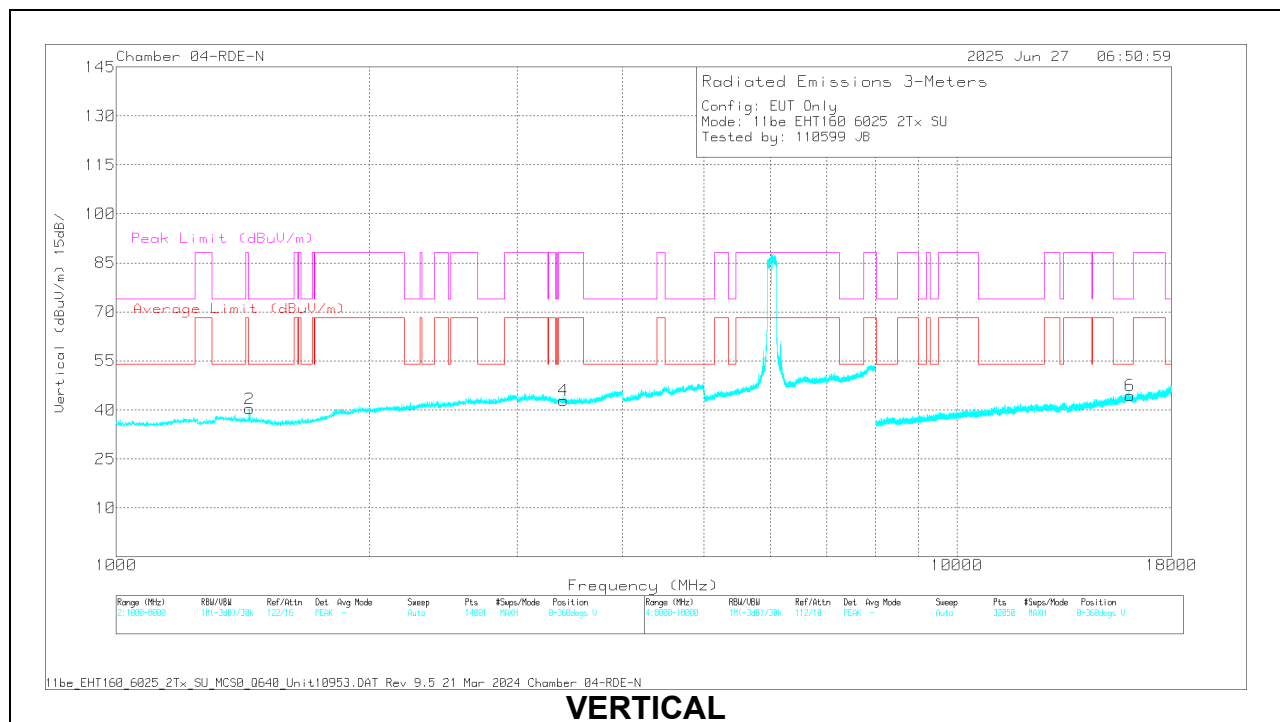
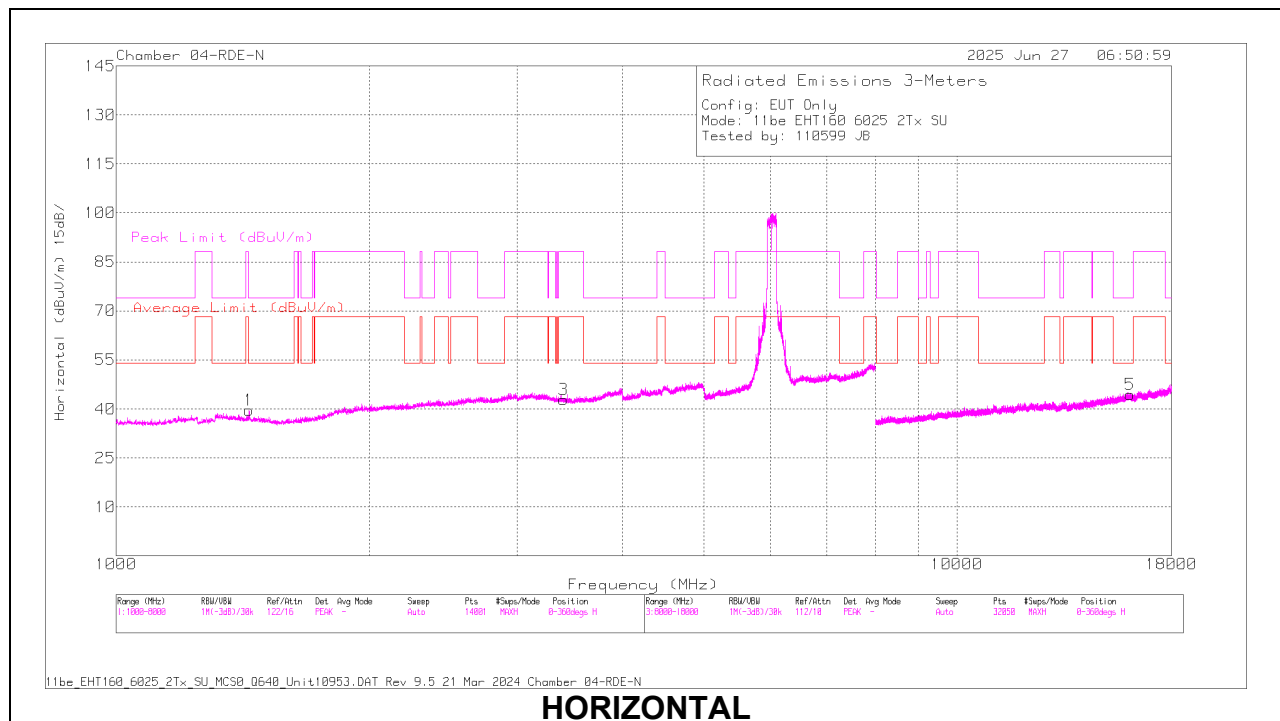
160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6025	6 + 5	* 1.439774	49.52	PK-U	28.5	-27.33	0	50.69	-	-	74	-23.31	43	349	H
			* 1.440026	41.04	ADR	28.5	-27.33	0.61	42.82	54	-11.18	-	-	43	349	H
			* 1.439905	48.33	PK-U	28.5	-27.33	0	49.5	-	-	74	-24.5	63	371	V
			* 1.440093	40.45	ADR	28.5	-27.33	0.61	42.23	54	-11.77	-	-	63	371	V
			* 16.068442	56.3	PK-U	40.5	-43	0	53.8	-	-	74	-20.2	357	288	H
			* 16.084859	44.49	ADR	40.5	-43.08	0.61	42.52	54	-11.48	-	-	357	288	H
			* 16.071462	55.93	PK-U	40.5	-43.03	0	53.4	-	-	74	-20.6	1	201	V
			* 16.082515	44.66	ADR	40.5	-43.03	0.61	42.74	54	-11.26	-	-	1	201	V
			3.400636	33.72	ADR	32.9	-25.36	0.61	41.87	68.2	-26.33	-	-	200	117	H
			3.412335	45.35	PK-U	32.9	-25.37	0	52.88	-	-	88.2	-35.32	275	231	V
			3.414783	45.88	PK-U	32.9	-25.37	0	53.41	-	-	88.2	-34.79	200	117	H
			3.419751	33.67	ADR	32.9	-25.31	0.61	41.87	68.2	-26.33	-	-	275	231	V
	6185	6 + 5	* 1.439881	48.12	PK-U	28.5	-27.33	0	49.29	-	-	74	-24.71	44	223	H
			* 1.439981	40	ADR	28.5	-27.33	0.61	41.78	54	-12.22	-	-	44	223	H
			* 4.703837	46.14	PK-U	34.2	-24.56	0	55.78	-	-	74	-18.22	83	215	H
			* 4.707173	34.78	ADR	34.2	-24.5	0.61	45.09	54	-8.91	-	-	83	215	H
			* 1.440151	47.78	PK-U	28.5	-27.33	0	48.95	-	-	74	-25.05	65	202	V
			* 1.440057	39.29	ADR	28.5	-27.33	0.61	41.07	54	-12.93	-	-	65	202	V
			* 4.68452	46.7	PK-U	34.2	-24.82	0	56.08	-	-	74	-17.92	29	290	V
			* 4.698648	34.77	ADR	34.2	-24.6	0.61	44.98	54	-9.02	-	-	29	290	V
			* 11.149216	56.35	PK-U	38	-43.94	0	50.41	-	-	74	-23.59	320	228	H
			* 11.158227	44.56	ADR	38	-44.17	0.61	39	54	-15	-	-	320	228	H
			* 11.190786	55.84	PK-U	38.1	-44.36	0	49.58	-	-	74	-24.42	28	258	V
			* 11.16917	44.82	ADR	38	-44.56	0.61	38.87	54	-15.13	-	-	28	258	V
	6345	6 + 5	* 1.440172	46.46	PK-U	28.5	-27.33	0	47.63	-	-	74	-26.37	38	106	H
			* 1.439946	37.34	ADR	28.5	-27.33	0.61	39.12	54	-14.88	-	-	38	106	H
			* 5.127079	45.34	PK-U	34.4	-24.12	0	55.62	-	-	74	-18.38	270	265	H
			* 5.122222	33.63	ADR	34.3	-24.24	0.61	44.3	54	-9.7	-	-	270	265	H
			* 1.440171	45.77	PK-U	28.5	-27.33	0	46.94	-	-	74	-27.06	164	126	V
			* 1.440013	35.68	ADR	28.5	-27.33	0.61	37.46	54	-16.54	-	-	164	126	V
			* 5.124538	45.62	PK-U	34.3	-24.17	0	55.75	-	-	74	-18.25	349	295	V
			* 5.120098	33.86	ADR	34.3	-24.22	0.61	44.55	54	-9.45	-	-	349	295	V
			13.168935	54.94	PK-U	38.9	-43.78	0	50.06	-	-	88.2	-38.14	74	117	V
			13.184361	43.64	ADR	38.9	-43.9	0.61	39.25	68.2	-28.95	-	-	74	117	V
			13.198638	43.37	ADR	38.9	-43.78	0.61	39.1	68.2	-29.1	-	-	54	213	H
			13.224143	55.08	PK-U	38.9	-43.59	0	50.39	-	-	88.2	-37.81	54	213	H
11be (Partial RU Mode / Highest PSD)	6025 (52T)	6 + 5	1.999605	60.97	PK-U	32.1	-49.8	0	43.27	-	-	88.2	-44.93	27	252	H
			2.000996	49.68	ADR	32.1	-49.78	0	32	68.2	-36.2	-	-	27	252	H
			3.090152	58.63	PK-U	33.1	-48.17	0	43.56	-	-	88.2	-44.64	174	146	H
			3.087633	46.87	ADR	33.1	-48.21	0	31.76	68.2	-36.44	-	-	174	146	H
			2.016753	60.82	PK-U	32.1	-49.73	0	43.19	-	-	88.2	-45.01	133	333	V
			2.002337	49.49	ADR	32.1	-49.77	0	31.82	68.2	-36.38	-	-	133	333	V
			3.090893	58.49	PK-U	33.1	-48.17	0	43.42	-	-	88.2	-44.78	19	175	V
			3.096168	47.07	ADR	33.1	-48.13	0	32.04	68.2	-36.16	-	-	19	175	V
			* 12.187212	55.03	PK-U	39	-43.72	0	50.31	-	-	74	-23.69	189	213	H
			* 12.187196	43.64	ADR	39	-43.72	0	38.92	54	-15.08	-	-	189	213	H
			* 12.182916	55.36	PK-U	39	-43.75	0	50.61	-	-	74	-23.39	205	317	V
			* 12.184348	43.65	ADR	39	-43.73	0	38.92	54	-15.08	-	-	205	317	V
	6185 (52T)	6 + 5	1.998761	61.59	PK-U	32.1	-49.8	0	43.89	-	-	88.2	-44.31	0	101	H
			1.993104	49.96	ADR	32	-49.81	0	32.15	68.2	-36.05	-	-	0	101	H
			3.12337	58.66	PK-U	33.2	-48.13	0	43.73	-	-	88.2	-44.47	0	101	H
			3.11282	46.61	ADR	33.2	-48.16	0	31.65	68.2	-36.55	-	-	0	101	H
			2.000707	61.42	PK-U	32.1	-49.79	0	43.73	-	-	88.2	-44.47	0	101	V
			1.997019	49.83	ADR	32.1	-49.81	0	32.12	68.2	-36.08	-	-	0	101	V
			3.13445	57.8	PK-U	33.4	-48.03	0	43.17	-	-	88.2	-45.03	0	200	V
			3.111701	46.57	ADR	33.2	-48.16	0	31.61	68.2	-36.59	-	-	0	200	V
			10.496383	56.45	PK-U	37.8	-45.42	0	48.83	-	-	88.2	-39.37	0	101	H
			10.483813	44.61	ADR	37.8	-45.58	0	36.83	68.2	-31.37	-	-	0	101	H
			10.507538	56.03	PK-U	37.8	-45.23	0	48.6	-	-	88.2	-39.6	0	200	V
			10.484384	44.73	ADR	37.8	-45.56	0	36.97	68.2	-31.23	-	-	0	200	V
	6345 (52T)	6 + 5	1.948864	61.87	PK-U	31.4	-50.19	0	43.08	-	-	88.2	-45.12	1	200	H
			1.94746	50.3	ADR	31.5	-50.19	0	31.61	68.2	-36.59	-	-	1	200	H
			3.258754	58.47	PK-U	32.8	-47.88	0	43.39	-	-	88.2	-44.81	1	101	H
			3.259701	46.7	ADR	32.8	-47.9	0	31.6	68.2	-36.6	-	-	1	101	H
			1.949343	62.93	PK-U	31.4	-50.19	0	44.14	-	-	88.2	-44.06	1	101	V
			1.949628	50.53	ADR	31.4	-50.18	0	31.75	68.2	-36.45	-	-	1	101	V
			3.229943	58.07	PK-U	32.8	-47.96	0	42.91	-	-	88.2	-45.29	1	101	V
			* 3.261121	46.68	ADR	32.8	-47.94	0	31.54	54	-22.46	-	-	1	101	V
			* 11.070602	56.43	PK-U	37.6	-43.87	0	50.16	-	-	74	-23.84	1	101	H
			* 11.065302	44.73	ADR	37.6	-43.92	0	38.41	54	-15.59	-	-	1	101	H
			* 11.057503	56.68	PK-U	37.6	-44.01	0	50.27	-	-	74	-23.73	1	101	V
			* 11.070102	44.79	ADR	37.6	-43.88	0	38.51	54	-15.49	-	-	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6025MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.439774	49.52	PK-U	28.5	-27.33	0	50.69	-	-	74	-23.31	43	349	H
1	* 1.440026	41.04	ADR	28.5	-27.33	0.61	42.82	54	-11.18	-	-	43	349	H
2	* 1.439905	48.33	PK-U	28.5	-27.33	0	49.5	-	-	74	-24.5	63	371	V
2	* 1.440093	40.45	ADR	28.5	-27.33	0.61	42.23	54	-11.77	-	-	63	371	V
5	* 16.068442	56.3	PK-U	40.5	-43	0	53.8	-	-	74	-20.2	357	288	H
5	* 16.084859	44.49	ADR	40.5	-43.08	0.61	42.52	54	-11.48	-	-	357	288	H
6	* 16.071462	55.93	PK-U	40.5	-43.03	0	53.4	-	-	74	-20.6	1	201	V
6	* 16.082515	44.66	ADR	40.5	-43.03	0.61	42.74	54	-11.26	-	-	1	201	V
3	3.400636	33.72	ADR	32.9	-25.36	0.61	41.87	68.2	-26.33	-	-	200	117	H
3	3.412335	45.35	PK-U	32.9	-25.37	0	52.88	-	-	88.2	-35.32	275	231	V
4	3.414783	45.88	PK-U	32.9	-25.37	0	53.41	-	-	88.2	-34.79	200	117	H
4	3.419751	33.67	ADR	32.9	-25.31	0.61	41.87	68.2	-26.33	-	-	275	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS

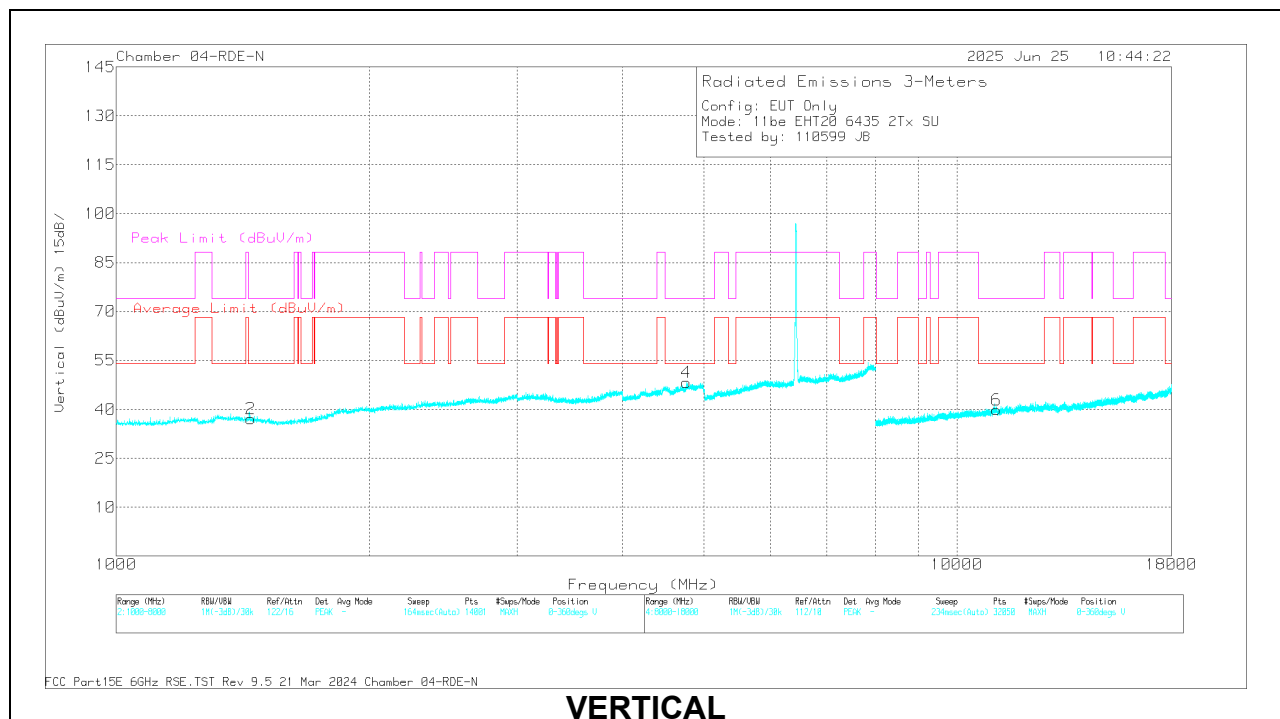
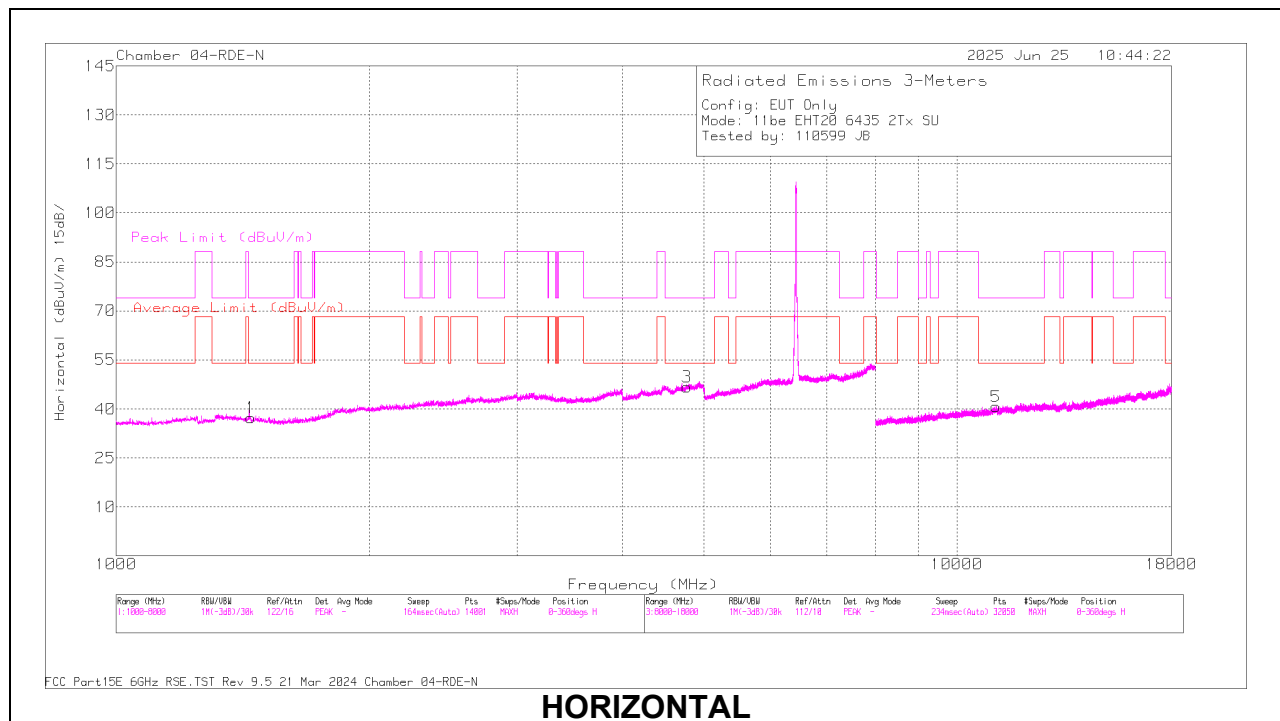
20MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6435	6 + 5	* 1.440218	47.03	PK-U	28.5	-27.33	0	48.2	-	-	74	-25.8	90	307	H
			* 1.440132	36.45	ADR	28.5	-27.33	0.13	37.75	54	-16.25	-	-	90	307	H
			* 4.780676	46.54	PK-U	34.4	-24.61	0	56.33	-	-	74	-17.67	96	257	H
			* 4.782608	35.1	ADR	34.4	-24.61	0.13	45.02	54	-8.98	-	-	96	257	H
			* 1.440117	47.09	PK-U	28.5	-27.33	0	48.26	-	-	74	-25.74	129	178	V
			* 1.439897	35.73	ADR	28.5	-27.33	0.13	37.03	54	-16.97	-	-	129	178	V
			* 4.763763	46.69	PK-U	34.4	-24.71	0	56.38	-	-	74	-17.62	166	309	V
			* 4.787021	35.06	ADR	34.4	-24.63	0.13	44.96	54	-9.04	-	-	166	309	V
			* 11.122513	56.39	PK-U	38	-44.4	0	49.99	-	-	74	-24.01	278	172	H
			* 11.133773	44.73	ADR	38	-44	0.13	38.86	54	-15.14	-	-	278	172	H
			* 11.144596	55.99	PK-U	38	-43.89	0	50.1	-	-	74	-23.9	13	210	V
			* 11.155931	44.59	ADR	38	-44.09	0.13	38.63	54	-15.37	-	-	13	210	V
	6475	6 + 5	* 1.440053	47.29	PK-U	28.5	-27.33	0	48.46	-	-	74	-25.54	3	135	H
			* 1.43993	36.26	ADR	28.5	-27.33	0.13	37.56	54	-16.44	-	-	3	135	H
			* 4.638705	46.52	PK-U	34.1	-24.56	0	56.06	-	-	74	-17.94	110	320	H
			* 4.660947	35.24	ADR	34.1	-24.73	0.13	44.74	54	-9.26	-	-	110	320	H
			* 1.457333	45.62	PK-U	28.4	-27.28	0	46.74	-	-	74	-27.26	70	223	V
			* 1.440429	34.27	ADR	28.5	-27.32	0.13	35.58	54	-18.42	-	-	70	223	V
			* 4.630492	46.35	PK-U	34	-24.61	0	55.74	-	-	74	-18.26	354	306	V
			* 4.657485	35.09	ADR	34.1	-24.73	0.13	44.59	54	-9.41	-	-	354	306	V
			* 11.860524	55.68	PK-U	38.7	-44.28	0	50.1	-	-	74	-23.9	122	262	H
			* 11.859682	44.33	ADR	38.7	-44.29	0.13	38.87	54	-15.13	-	-	122	262	H
			* 11.854555	55.57	PK-U	38.7	-44.31	0	49.96	-	-	74	-24.04	234	120	V
			* 11.842424	44.13	ADR	38.7	-44.17	0.13	38.79	54	-15.21	-	-	234	120	V
	6515	6 + 5	* 1.44018	47.5	PK-U	28.5	-27.33	0	48.67	-	-	74	-25.33	14	201	H
			* 1.439991	37.17	ADR	28.5	-27.33	0.13	38.47	54	-15.53	-	-	14	201	H
			* 1.440062	45.94	PK-U	28.5	-27.33	0	47.11	-	-	74	-26.89	346	305	V
			* 1.440405	35.2	ADR	28.5	-27.32	0.13	36.51	54	-17.49	-	-	346	305	V
			* 13.326348	55.47	PK-U	39	-43.84	0	50.63	-	-	74	-23.37	86	212	H
			* 13.372392	44.13	ADR	39	-43.72	0.13	39.54	54	-14.46	-	-	86	212	H
			3.112323	34.25	ADR	33	-25.46	0.13	41.92	68.2	-26.28	-	-	1	201	V
			3.113447	45.55	PK-U	33	-25.43	0	53.12	-	-	88.2	-35.08	198	233	H
			3.131003	34.21	ADR	33	-25.4	0.13	41.94	68.2	-26.26	-	-	198	233	H
			3.131265	46.85	PK-U	33	-25.4	0	54.45	-	-	88.2	-33.75	1	201	V
			13.420266	44.15	ADR	39	-43.09	0.13	40.19	68.2	-28.01	-	-	3	286	V
			13.432404	55.63	PK-U	38.9	-43.19	0	51.34	-	-	88.2	-36.86	3	286	V
	6435 (52T)	6 + 5	1.999284	61.69	PK-U	32.1	-49.8	0	43.99	-	-	88.2	-44.21	0	200	H
			2.002893	49.8	ADR	32.1	-49.76	0	32.14	68.2	-36.06	-	-	0	200	H
			3.125576	58.1	PK-U	33.3	-48.12	0	43.28	-	-	88.2	-44.92	0	101	H
			3.15228	46.38	ADR	33.5	-47.79	0	32.09	68.2	-36.11	-	-	0	101	H
			2.000097	61.23	PK-U	32.1	-49.8	0	43.53	-	-	88.2	-44.67	0	200	V
			1.998462	50.11	ADR	32.1	-49.81	0	32.4	68.2	-35.8	-	-	0	200	V
			3.130623	57.82	PK-U	33.4	-48.08	0	43.14	-	-	88.2	-45.06	0	101	V
			3.159136	46.46	ADR	33.5	-47.88	0	32.08	68.2	-36.12	-	-	0	101	V
			* 10.626021	56.94	PK-U	37.7	-45.75	0	48.89	-	-	74	-25.11	0	199	H
			* 10.642131	45.04	ADR	37.6	-45.6	0	37.04	54	-16.96	-	-	0	199	H
			* 10.624173	56.26	PK-U	37.7	-45.79	0	48.17	-	-	74	-25.83	0	199	V
			* 10.646339	45.04	ADR	37.6	-45.57	0	37.07	54	-16.93	-	-	0	199	V
		6475 (52T)	2.000226	61.21	PK-U	32.1	-49.8	0	43.51	-	-	88.2	-44.69	1	101	H
			1.997124	49.96	ADR	32.1	-49.81	0	32.25	68.2	-35.95	-	-	1	101	H
			3.164431	58.07	PK-U	33.4	-47.87	0	43.6	-	-	88.2	-44.6	1	200	H
			3.157183	46.44	ADR	33.5	-47.83	0	32.11	68.2	-36.09	-	-	1	200	H
			2.000719	61.74	PK-U	32.1	-49.79	0	44.05	-	-	88.2	-44.15	1	101	V
			1.994808	49.87	ADR	32	-49.82	0	32.05	68.2	-36.15	-	-	1	101	V
			3.151719	58.73	PK-U	33.5	-47.79	0	44.44	-	-	88.2	-43.76	1	101	V
			3.158479	46.38	ADR	33.5	-47.85	0	32.03	68.2	-36.17	-	-	1	101	V
			* 11.123688	56.09	PK-U	37.6	-43.73	0	49.96	-	-	74	-24.04	1	199	H
			* 11.148438	44.29	ADR	37.6	-44.28	0	37.61	54	-16.39	-	-	1	199	H
			* 11.118089	56.03	PK-U	37.6	-43.8	0	49.83	-	-	74	-24.17	1	199	V
			* 11.140746	44.23	ADR	37.6	-43.96	0	37.87	54	-16.13	-	-	1	199	V
	6515 (52T)	6 + 5	2.050119	61.19	PK-U	32	-49.98	0	43.21	-	-	88.2	-44.99	139	373	H
			2.052754	49.43	ADR	32	-50.03	0	31.4	68.2	-36.8	-	-	139	373	H
			3.165611	57.81	PK-U	33.4	-47.88	0	43.33	-	-	88.2	-44.87	199	357	H
			3.16346	46.43	ADR	33.4	-47.87	0	31.96	68.2	-36.24	-	-	199	357	H
			2.055249	60.96	PK-U	32	-50.03	0	42.93	-	-	88.2	-45.27	315	274	V
			2.053125	49.41	ADR	32	-50.03	0	31.38	68.2	-36.82	-	-	315	274	V
			3.151737	58.37	PK-U	33.5	-47.79	0	44.08	-	-	88.2	-44.12	248	225	V
			3.155208	46.25	ADR	33.5	-47.81	0	31.94	68.2	-36.26	-	-	248	225	V
			13.425438	55.12	PK-U	39	-43.9	0	50.22	-	-	88.2	-37.98	168	370	H
			13.435925	43.06	ADR	39	-43.86	0	38.2	68.2	-30	-	-	168	370	H
			13.422177	55.25	PK-U	39	-43.81	0	50.44	-	-	88.2	-37.76	256	238	V
			13.427316	43.24	ADR	39	-43.85	0	38.39	68.2	-29.81	-	-	256	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6435MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.440218	47.03	PK-U	28.5	0	-27.33	48.2	-	-	74	-25.8	90	307	H
* 1.440132	36.45	ADR	28.5	0.13	-27.33	37.75	54	-16.25	-	-	90	307	H
* 4.780676	46.54	PK-U	34.4	0	-24.61	56.33	-	-	74	-17.67	96	257	H
* 4.782608	35.1	ADR	34.4	0.13	-24.61	45.02	54	-8.98	-	-	96	257	H
* 1.440117	47.09	PK-U	28.5	0	-27.33	48.26	-	-	74	-25.74	129	178	V
* 1.439897	35.73	ADR	28.5	0.13	-27.33	37.03	54	-16.97	-	-	129	178	V
* 4.763763	46.69	PK-U	34.4	0	-24.71	56.38	-	-	74	-17.62	166	309	V
* 4.787021	35.06	ADR	34.4	0.13	-24.63	44.96	54	-9.04	-	-	166	309	V
* 11.122513	56.39	PK-U	38	0	-44.4	49.99	-	-	74	-24.01	278	172	H
* 11.133773	44.73	ADR	38	0.13	-44	38.86	54	-15.14	-	-	278	172	H
* 11.144596	55.99	PK-U	38	0	-43.89	50.1	-	-	74	-23.9	13	210	V
* 11.155931	44.59	ADR	38	0.13	-44.09	38.63	54	-15.37	-	-	13	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

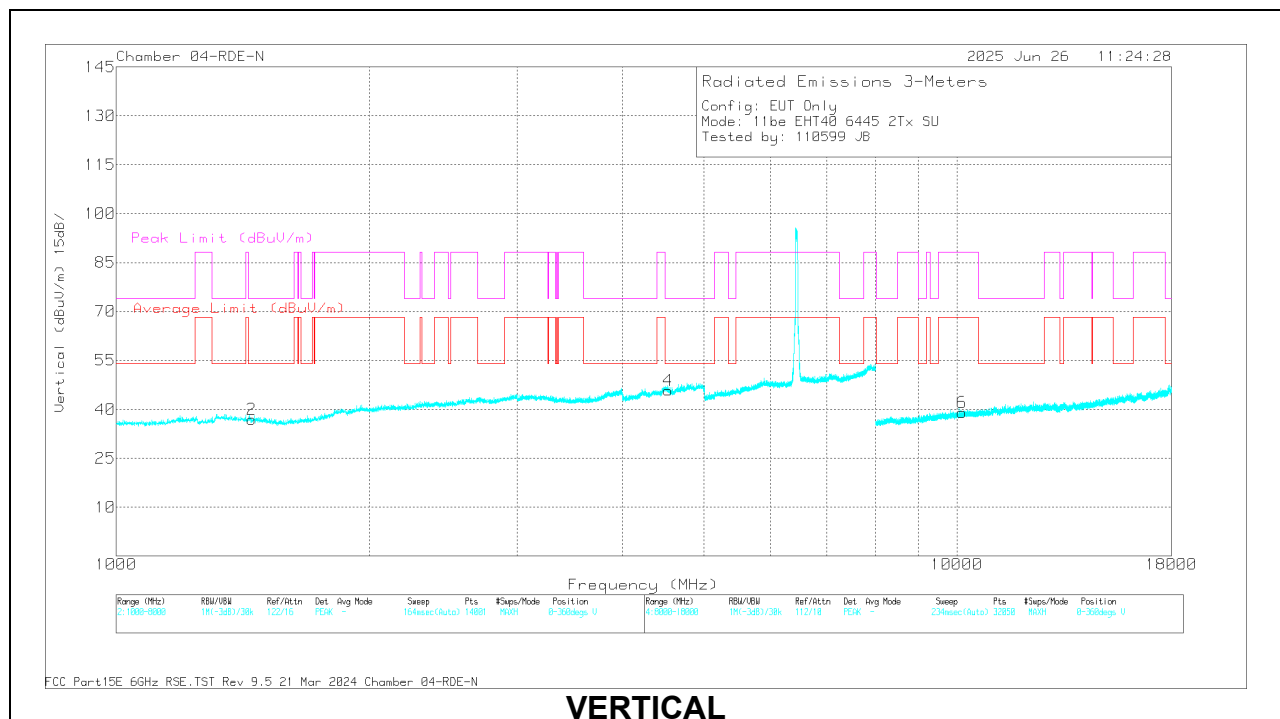
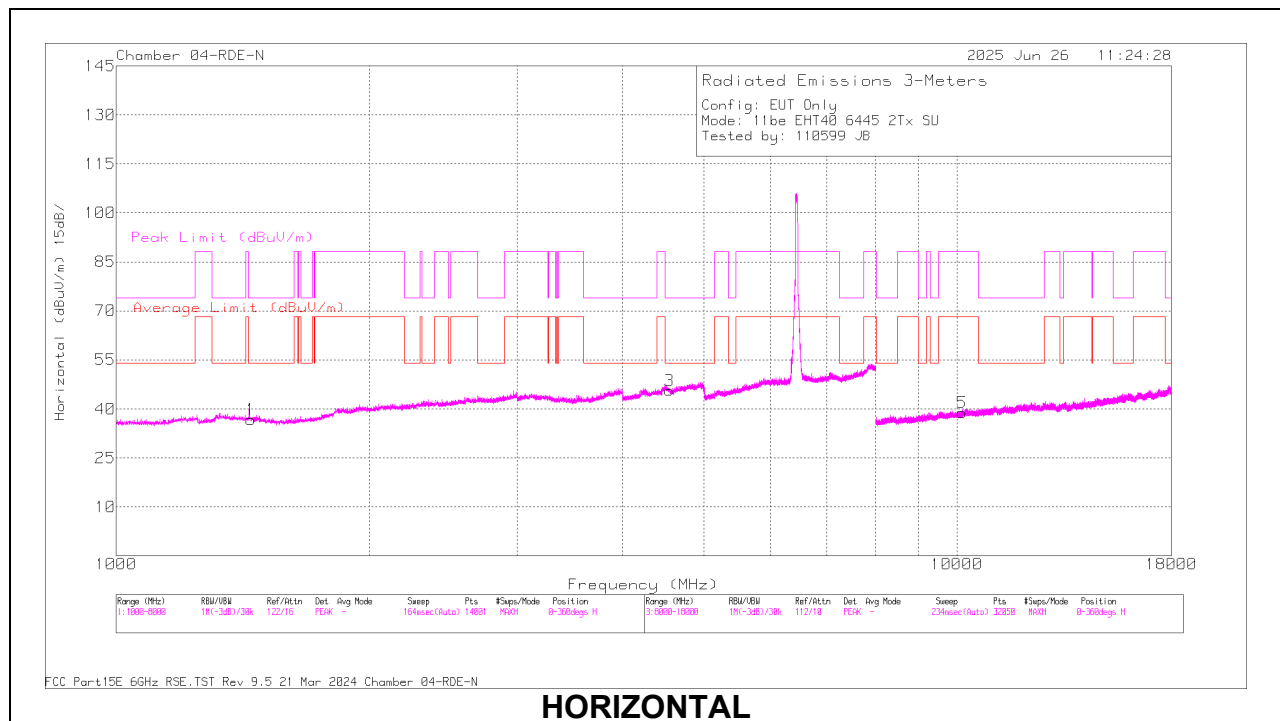
40MHz

UNI-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6445	6 + 5	* 1.440121	47.32	PK-U	28.5	-27.33	0	48.49	-	-	74	-25.51	315	227	H
			* 1.439956	37.19	ADR	28.5	-27.33	0.23	38.59	54	-15.41	-	-	315	227	H
			* 4.551747	46.28	PK-U	33.9	-25.08	0	55.1	-	-	74	-18.9	5	227	H
			* 4.547727	35.03	ADR	33.9	-25.09	0.23	44.07	54	-9.93	-	-	5	227	H
			* 1.439633	46.29	PK-U	28.5	-27.33	0	47.46	-	-	74	-26.54	192	199	V
			* 1.439448	34.43	ADR	28.5	-27.33	0.23	35.83	54	-18.17	-	-	192	199	V
			* 4.542834	46.82	PK-U	33.9	-25.11	0	55.61	-	-	74	-18.39	247	207	V
			* 4.535075	35	ADR	33.9	-25.18	0.23	43.95	54	-10.05	-	-	247	207	V
			10.128814	45.33	ADR	37.6	-45.73	0.23	37.43	68.2	-30.77	-	-	26	157	V
			10.129826	56.81	PK-U	37.6	-45.7	0	48.71	-	-	88.2	-39.49	306	338	H
			10.129871	45.61	ADR	37.6	-45.7	0.23	37.74	68.2	-30.46	-	-	306	338	H
			10.136984	57.52	PK-U	37.6	-45.6	0	49.52	-	-	88.2	-38.68	26	157	V
	6485	6 + 5	* 1.604915	46.04	PK-U	28.2	-27.18	0	47.06	-	-	74	-26.94	3	107	H
			* 4.664675	46.47	PK-U	34.1	-24.78	0	55.79	-	-	74	-18.21	40	278	H
			* 4.671446	34.93	ADR	34.1	-24.86	0.23	44.4	54	-9.6	-	-	40	278	H
			* 1.482195	46.5	PK-U	28.2	-27.31	0	47.39	-	-	74	-26.61	178	144	V
			* 1.443501	34.78	ADR	28.4	-27.34	0.23	36.07	54	-17.93	-	-	178	144	V
			* 4.655001	46.44	PK-U	34.1	-24.74	0	55.8	-	-	74	-18.2	203	351	V
			* 4.690844	35.04	ADR	34.2	-24.71	0.23	44.76	54	-9.24	-	-	203	351	V
			16.28976	34.4	ADR	28.3	-27.29	0.23	35.64	68.2	-32.56	-	-	3	107	H
			16.54683	56.62	PK-U	40.6	-43.36	0	53.86	-	-	88.2	-34.34	4	318	H
			16.557194	45.13	ADR	40.6	-43.29	0.23	42.67	68.2	-25.53	-	-	4	318	H
			16.562122	45.13	ADR	40.6	-43.3	0.23	42.66	68.2	-25.54	-	-	306	274	V
			16.563073	56.74	PK-U	40.6	-43.27	0	54.07	-	-	88.2	-34.13	306	274	V
	6525 (Straddle)	6 + 5	* 2.389411	46.34	PK-U	32	-26.6	0	51.74	-	-	74	-22.26	335	255	H
			* 4.889697	46.85	PK-U	34.4	-24.73	0	56.52	-	-	74	-17.48	181	202	H
			* 4.880366	34.85	ADR	34.4	-24.83	0.23	44.65	54	-9.35	-	-	181	202	H
			* 4.874299	47.04	PK-U	34.4	-24.74	0	56.7	-	-	74	-17.3	346	307	V
			* 4.873767	34.81	ADR	34.4	-24.74	0.23	44.7	54	-9.3	-	-	346	307	V
			* 11.200121	57.64	PK-U	38.1	-44.21	0	51.53	-	-	74	-22.47	193	367	H
			* 11.192635	45.05	ADR	38.1	-44.35	0.23	39.03	54	-14.97	-	-	193	367	H
			* 11.170537	56.05	PK-U	38	-44.54	0	49.51	-	-	74	-24.49	92	190	V
			* 11.184308	44.63	ADR	38	-44.56	0.23	38.3	54	-15.7	-	-	92	190	V
			2.398116	34.74	ADR	32.1	-26.51	0.23	40.56	68.2	-27.64	-	-	335	255	H
11be (Partial RU Mode / Highest PSD)	6445 (26T)	6 + 5	2.426335	34.89	ADR	32.2	-26.45	0.23	40.87	68.2	-27.33	-	-	205	396	V
			2.42996	46.92	PK-U	32.2	-26.44	0	52.68	-	-	88.2	-35.52	205	396	V
			2.146861	60.77	PK-U	31.6	-50.51	0	41.86	-	-	88.2	-46.34	134	318	H
			2.147144	49.36	ADR	31.6	-50.51	0	30.45	68.2	-37.75	-	-	134	318	H
			2.15104	49.4	ADR	31.7	-50.49	0	30.61	68.2	-37.59	-	-	350	258	V
			2.152142	60.69	PK-U	31.7	-50.47	0	41.92	-	-	88.2	-46.28	350	258	V
			3.218022	47.12	ADR	33.3	-48.28	0	32.14	68.2	-36.06	-	-	149	309	V
			3.219043	58.85	PK-U	33.3	-48.27	0	43.88	-	-	88.2	-44.32	149	309	V
			3.22312	47.04	ADR	33.3	-48.18	0	32.16	68.2	-36.04	-	-	350	258	H
			3.225606	58.63	PK-U	33.3	-48.14	0	43.79	-	-	88.2	-44.41	350	258	H
	6485 (26T)	6 + 5	12.876824	43.65	ADR	39.3	-44.51	0	38.44	68.2	-29.76	-	-	342	375	H
			12.877168	55.48	PK-U	39.3	-44.51	0	50.27	-	-	88.2	-37.93	342	375	H
			12.879154	43.64	ADR	39.3	-44.45	0	38.49	68.2	-29.71	-	-	351	145	V
			12.880765	54.89	PK-U	39.3	-44.44	0	49.75	-	-	88.2	-38.45	351	145	V
			* 2.248105	61.39	PK-U	32.2	-50.92	0	42.67	-	-	74	-31.33	216	260	V
			* 2.248474	49.56	ADR	32.2	-50.92	0	30.84	54	-23.16	-	-	216	260	V
			* 2.249485	61.33	PK-U	32.2	-50.92	0	42.61	-	-	74	-31.39	221	109	H
			* 2.251698	49.81	ADR	32.2	-50.93	0	31.08	54	-22.92	-	-	221	109	H
			* 4.254683	57.5	PK-U	34.1	-46.87	0	44.73	-	-	74	-29.27	301	339	H
			* 4.254988	45.01	ADR	34.1	-46.86	0	32.25	54	-21.75	-	-	301	339	H
	6525 (26T)	6 + 5	* 4.25571	44.98	ADR	34.1	-46.83	0	32.25	54	-21.75	-	-	185	292	V
			* 4.256493	56.45	PK-U	34.1	-46.81	0	43.74	-	-	74	-30.26	185	292	V
			* 12.398382	43.63	ADR	38.9	-44.18	0	38.35	54	-15.65	-	-	276	187	H
			* 12.399547	54.84	PK-U	38.9	-44.18	0	49.56	-	-	74	-24.44	276	187	H
			* 12.40425	43.37	ADR	38.9	-44.19	0	38.08	54	-15.92	-	-	203	106	V
			* 12.404266	54.62	PK-U	38.9	-44.19	0	49.33	-	-	74	-24.67	203	106	V
			* 2.246674	49.6	ADR	32.2	-50.91	0	30.89	54	-23.11	-	-	31	205	H
			* 2.24704	49.89	ADR	32.2	-50.91	0	31.18	54	-22.82	-	-	356	241	V
			* 2.247921	61.43	PK-U	32.2	-50.92	0	42.71	-	-	74	-31.29	31	205	H
			* 2.249045	61.24	PK-U	32.2	-50.93	0	42.51	-	-	74	-31.49	356	241	V
			* 4.335555	47.1	ADR	34.3	-47.86	0	33.54	54	-20.46	-	-	59	209	V
	6525 (26T)	6 + 5	* 4.337326	58.83	PK-U	34.3	-47.94	0	45.19	-	-	74	-28.81	59	209	V
			* 4.337959	47.16	ADR	34.3	-47.96	0	33.5	54	-20.5	-	-	139	349	H
			* 4.339411	58.47	PK-U	34.3	-48.02	0	44.75	-	-	74	-29.25	139	349	H
			* 12.354892	44.04	ADR	38.9	-43.57	0	39.37	54	-14.63	-	-	256	371	V
			* 12.355002	55.4	PK-U	38.9	-43.56	0	50.74	-	-	74	-23.26	256	371	V
			* 12.356912	55.18	PK-U	38.9	-43.47	0	50.61	-	-	74	-23.39	11	110	H
			* 12.357438	43.91	ADR	38.9	-43.47	0	39.34	54	-14.66	-	-	11	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6445MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.440121	47.32	PK-U	28.5	0	-27.33	48.49	-	-	74	-25.51	315	227	H
* 1.439956	37.19	ADR	28.5	0.23	-27.33	38.59	54	-15.41	-	-	315	227	H
* 4.551747	46.28	PK-U	33.9	0	-25.08	55.1	-	-	74	-18.9	5	227	H
* 4.547727	35.03	ADR	33.9	0.23	-25.09	44.07	54	-9.93	-	-	5	227	H
* 1.439633	46.29	PK-U	28.5	0	-27.33	47.46	-	-	74	-26.54	192	199	V
* 1.439448	34.43	ADR	28.5	0.23	-27.33	35.83	54	-18.17	-	-	192	199	V
* 4.542834	46.82	PK-U	33.9	0	-25.11	55.61	-	-	74	-18.39	247	207	V
* 4.535075	35	ADR	33.9	0.23	-25.18	43.95	54	-10.05	-	-	247	207	V
10.128814	45.33	ADR	37.6	0.23	-45.73	37.43	68.2	-30.77	-	-	26	157	V
10.129826	56.81	PK-U	37.6	0	-45.7	48.71	-	-	88.2	-39.49	306	338	H
10.129871	45.61	ADR	37.6	0.23	-45.7	37.74	68.2	-30.46	-	-	306	338	H
10.136984	57.52	PK-U	37.6	0	-45.6	49.52	-	-	88.2	-38.68	26	157	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

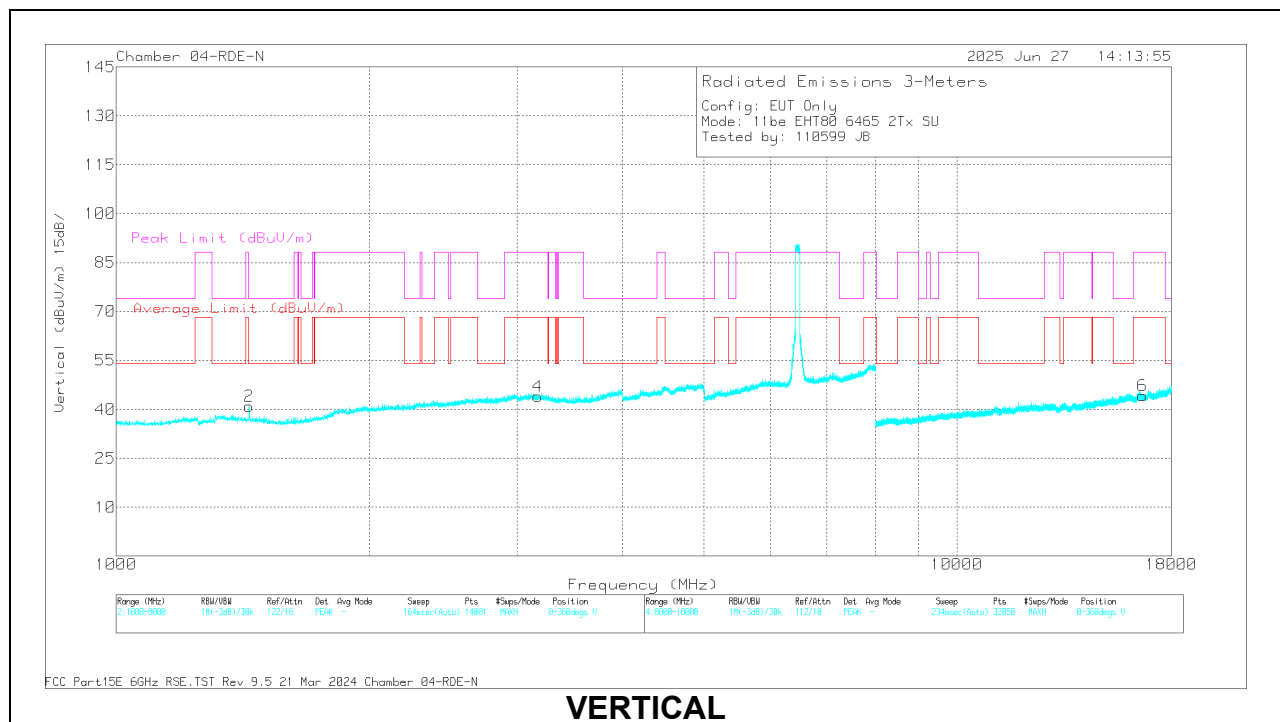
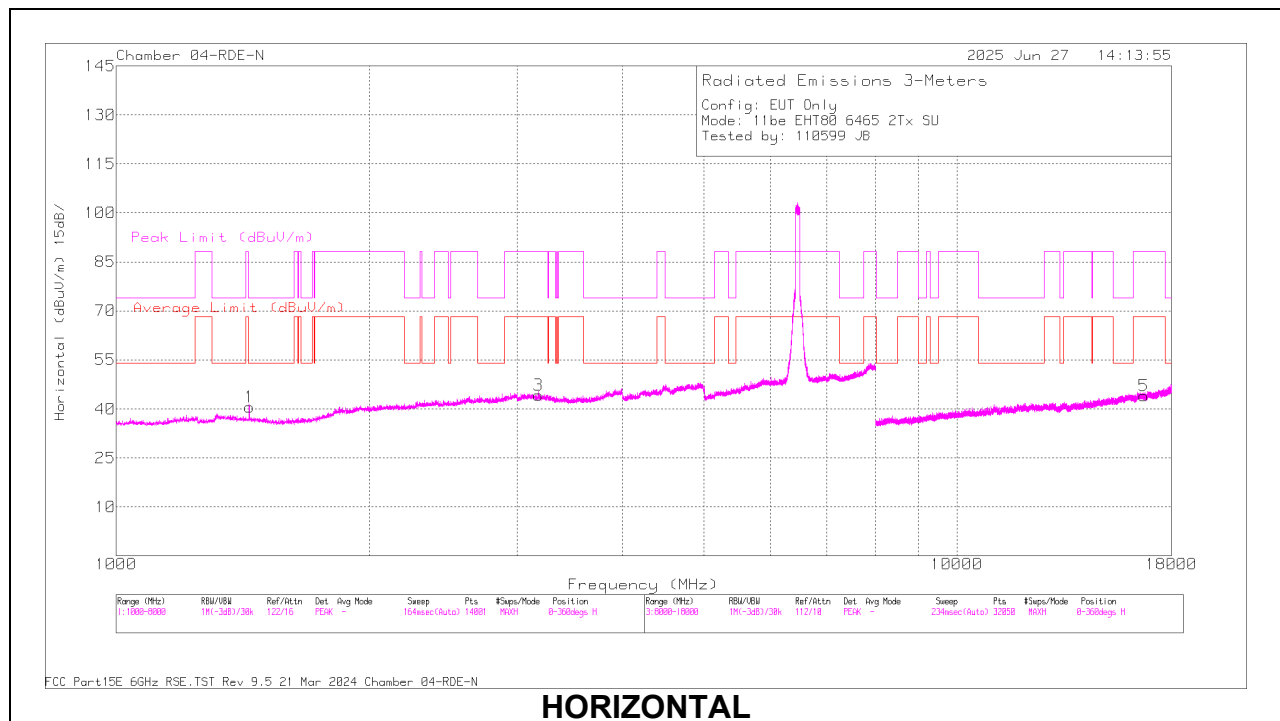
80MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6465	6 + 5	* 1.440345	47.38	PK-U	28.5	-27.32	0	48.56	-	-	74	-25.44	259	138	H
			* 1.439887	38.76	ADR	28.5	-27.33	0.41	40.34	54	-13.66	-	-	259	138	H
			* 1.439863	48.14	PK-U	28.5	-27.33	0	49.31	-	-	74	-24.69	59	202	V
			* 1.440143	40.22	ADR	28.5	-27.33	0.41	41.8	54	-12.2	-	-	59	202	V
			3.168339	45.73	PK-U	33	-25.53	0	53.2	-	-	88.2	-35	220	229	V
			3.181641	34.31	ADR	33	-25.4	0.41	42.32	68.2	-25.88	-	-	323	104	H
			3.190388	34.17	ADR	33	-25.36	0.41	42.22	68.2	-25.98	-	-	220	229	V
			3.200499	46.05	PK-U	33	-25.44	0	53.61	-	-	88.2	-34.59	323	104	H
			16.614322	56.17	PK-U	40.7	-43.27	0	53.6	-	-	88.2	-34.6	346	180	V
			16.629129	44.67	ADR	40.7	-43.27	0.41	42.51	68.2	-25.69	-	-	346	180	V
			16.689418	56.63	PK-U	40.8	-43.16	0	54.27	-	-	88.2	-33.93	130	170	H
			16.70735	45.13	ADR	40.8	-43.07	0.41	43.27	68.2	-24.93	-	-	130	170	H
			2.048313	61.49	PK-U	32	-49.97	0	43.52	-	-	88.2	-44.68	360	101	H
			2.053152	49.37	ADR	32	-50.03	0.09	31.43	68.2	-36.77	-	-	360	101	H
11be (Partial RU Mode / Highest PSD)	6465 (26T)	6 + 5	3.039589	60.01	PK-U	33	-48.34	0	44.67	-	-	88.2	-43.53	360	101	H
			3.0355	47.3	ADR	33	-48.31	0.09	32.08	68.2	-36.12	-	-	360	101	H
			2.066905	61.1	PK-U	31.9	-50.06	0	42.94	-	-	88.2	-45.26	360	101	V
			2.048658	49.33	ADR	32	-49.98	0.09	31.44	68.2	-36.76	-	-	360	101	V
			3.004614	59.34	PK-U	32.9	-48.69	0	43.55	-	-	88.2	-44.65	360	200	V
			3.043583	47.52	ADR	33	-48.36	0.09	32.25	68.2	-35.95	-	-	360	200	V
			11.034589	56.02	PK-U	37.6	-44.78	0	48.84	-	-	74	-25.16	360	200	H
			11.072961	44.55	ADR	37.6	-43.89	0.09	38.35	54	-15.65	-	-	360	200	H
			11.069166	56.29	PK-U	37.6	-43.91	0	49.98	-	-	74	-24.02	360	101	V
			11.067746	44.42	ADR	37.6	-43.92	0.09	38.19	54	-15.81	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6465MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.440345	47.38	PK-U	28.5	0	-27.32	48.56	-	-	74	-25.44	259	138	H
* 1.439887	38.76	ADR	28.5	0.41	-27.33	40.34	54	-13.66	-	-	259	138	H
* 1.439863	48.14	PK-U	28.5	0	-27.33	49.31	-	-	74	-24.69	59	202	V
* 1.440143	40.22	ADR	28.5	0.41	-27.33	41.8	54	-12.2	-	-	59	202	V
3.168339	45.73	PK-U	33	0	-25.53	53.2	-	-	88.2	-35	220	229	V
3.181641	34.31	ADR	33	0.41	-25.4	42.32	68.2	-25.88	-	-	323	104	H
3.190388	34.17	ADR	33	0.41	-25.36	42.22	68.2	-25.98	-	-	220	229	V
3.200499	46.05	PK-U	33	0	-25.44	53.61	-	-	88.2	-34.59	323	104	H
16.614322	56.17	PK-U	40.7	0	-43.27	53.6	-	-	88.2	-34.6	346	180	V
16.629129	44.67	ADR	40.7	0.41	-43.27	42.51	68.2	-25.69	-	-	346	180	V
16.689418	56.63	PK-U	40.8	0	-43.16	54.27	-	-	88.2	-33.93	130	170	H
16.70735	45.13	ADR	40.8	0.41	-43.07	43.27	68.2	-24.93	-	-	130	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

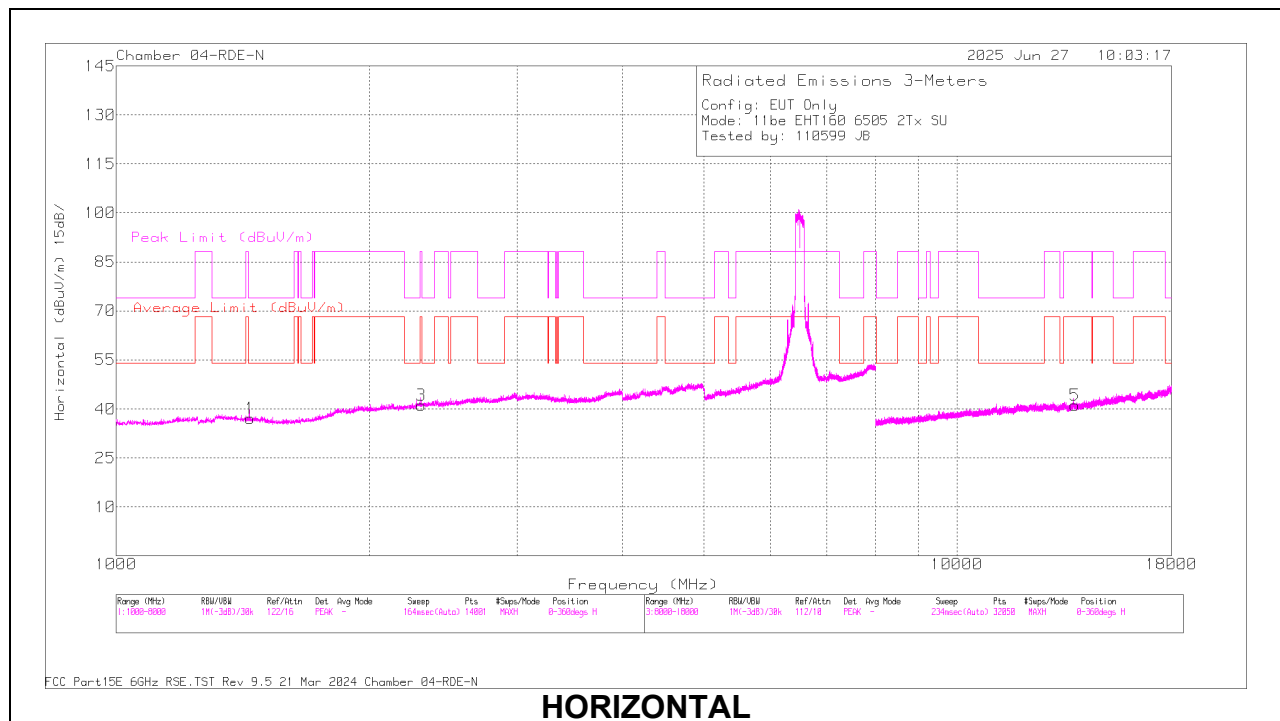
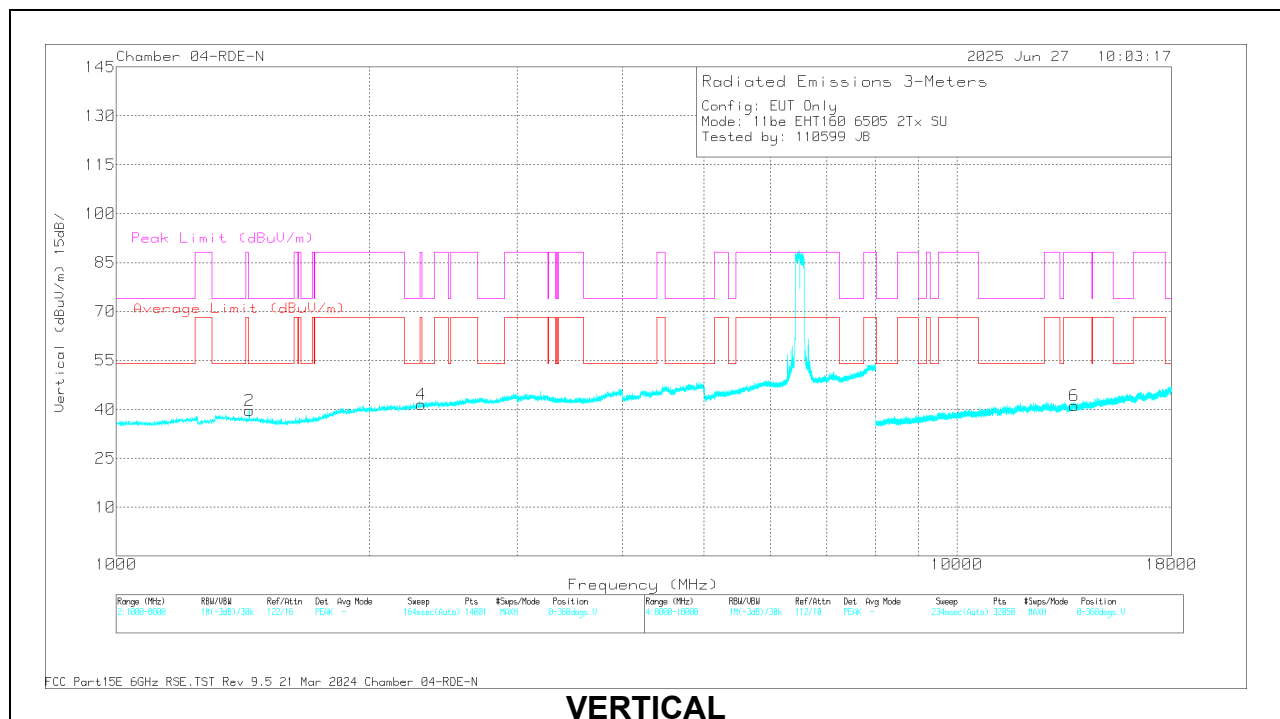
160MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6505 (Straddle)	6 + 5	* 1.450127	34.17	ADR	28.4	-27.36	0.61	35.82	54	-18.18	-	-	322	285	H
			* 2.315021	34.82	ADR	31.7	-26.6	0.61	40.53	54	-13.47	-	-	163	153	H
			* 1.440267	47.14	PK-U	28.5	-27.32	0	48.32	-	-	74	-25.68	55	206	V
			* 1.440067	37.3	ADR	28.5	-27.33	0.61	39.08	54	-14.92	-	-	55	206	V
			* 2.321651	46.85	PK-U	31.7	-26.55	0	52	-	-	74	-22	235	118	V
			* 2.287394	34.71	ADR	31.6	-26.64	0.61	40.28	54	-13.72	-	-	235	118	V
			1.433272	45.8	PK-U	28.5	-27.4	0	46.9	-	-	88.2	-41.3	322	285	H
			2.309104	46.06	PK-U	31.6	-26.52	0	51.14	-	-	88.2	-37.06	163	153	H
			13.775017	44.02	ADR	38.9	-43.02	0.61	40.51	68.2	-27.69	-	-	357	141	V
			13.799137	55.87	PK-U	38.9	-43.61	0	51.16	-	-	88.2	-37.04	357	141	V
			13.803318	56.22	PK-U	38.9	-43.64	0	51.48	-	-	88.2	-36.72	196	116	H
			13.832215	44.44	ADR	38.9	-43.54	0.61	40.41	68.2	-27.79	-	-	196	116	H
11be (Partial RU Mode / Highest PSD)	6505 (Straddle) (52T)	6 + 5	* 8.186498	55.31	PK-U	36	-44	0	47.31	-	-	74	-26.69	329	379	H
			* 8.188006	43.7	ADR	36	-44	0	35.7	54	-18.3	-	-	329	379	H
			* 8.181779	55.37	PK-U	36	-44	0	47.37	-	-	74	-26.63	92	213	V
			* 8.187046	43.46	ADR	36	-44	0	35.46	54	-18.54	-	-	92	213	V
			3.196754	57.4	PK-U	33.2	-46.28	0	44.32	-	-	88.2	-43.88	325	155	H
			3.204753	45.91	ADR	33.2	-46.4	0	32.71	68.2	-35.49	-	-	325	155	H
			3.211637	57.73	PK-U	33.2	-46.5	0	44.43	-	-	88.2	-43.77	195	187	V
			3.213401	45.89	ADR	33.2	-46.54	0	32.55	68.2	-35.65	-	-	195	187	V
			12.843798	53.81	PK-U	39.3	-41.4	0	51.71	-	-	88.2	-36.49	25	272	V
			12.860276	41.66	ADR	39.3	-41.4	0	39.56	68.2	-28.64	-	-	147	164	H
			12.861024	53.2	PK-U	39.3	-41.4	0	51.1	-	-	88.2	-37.1	147	164	H
			12.862744	41.91	ADR	39.3	-41.4	0	39.81	68.2	-28.39	-	-	25	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL / 6505MHz)**HORIZONTAL****VERTICAL**

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.450127	34.17	ADR	28.4	0.61	-27.36	35.82	54	-18.18	-	-	322	285	H
* 2.315021	34.82	ADR	31.7	0.61	-26.6	40.53	54	-13.47	-	-	163	153	H
* 1.440267	47.14	PK-U	28.5	0	-27.32	48.32	-	-	74	-25.68	55	206	V
* 1.440067	37.3	ADR	28.5	0.61	-27.33	39.08	54	-14.92	-	-	55	206	V
* 2.321651	46.85	PK-U	31.7	0	-26.55	52	-	-	74	-22	235	118	V
* 2.287394	34.71	ADR	31.6	0.61	-26.64	40.28	54	-13.72	-	-	235	118	V
1.433272	45.8	PK-U	28.5	0	-27.4	46.9	-	-	88.2	-41.3	322	285	H
2.309104	46.06	PK-U	31.6	0	-26.52	51.14	-	-	88.2	-37.06	163	153	H
13.775017	44.02	ADR	38.9	0.61	-43.02	40.51	68.2	-27.69	-	-	357	141	V
13.799137	55.87	PK-U	38.9	0	-43.61	51.16	-	-	88.2	-37.04	357	141	V
13.803318	56.22	PK-U	38.9	0	-43.64	51.48	-	-	88.2	-36.72	196	116	H
13.832215	44.44	ADR	38.9	0.61	-43.54	40.41	68.2	-27.79	-	-	196	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS

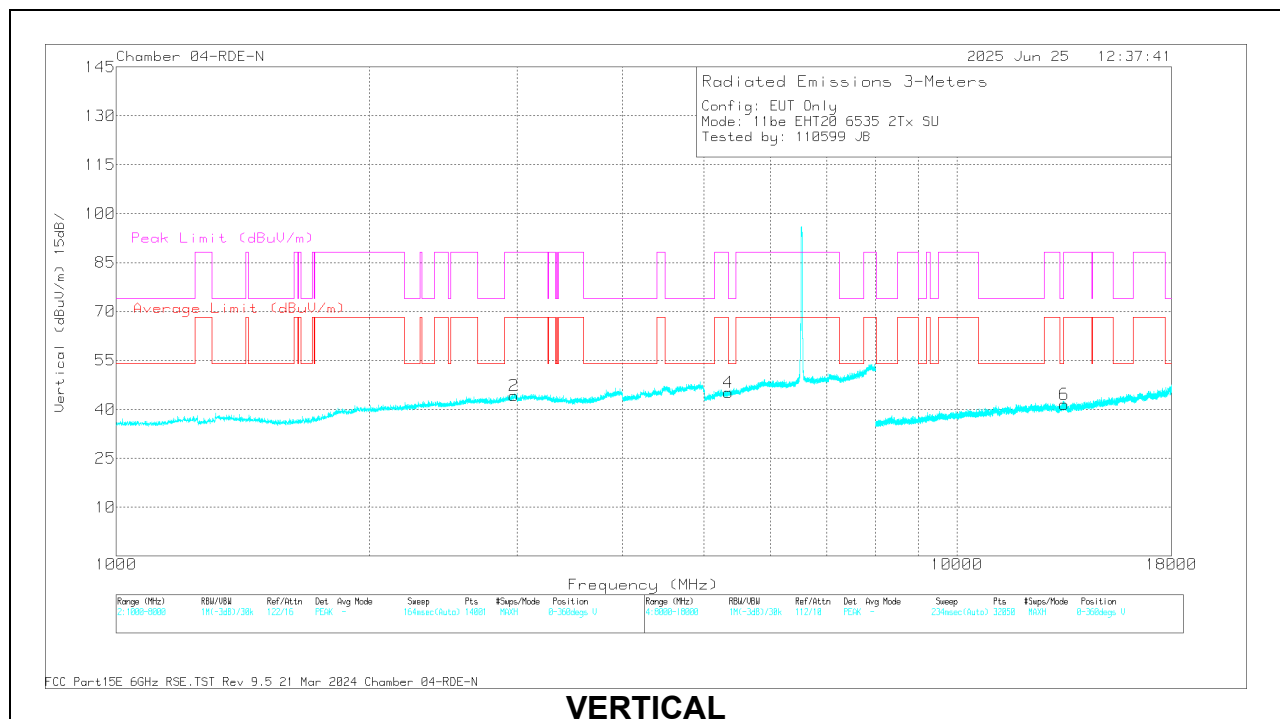
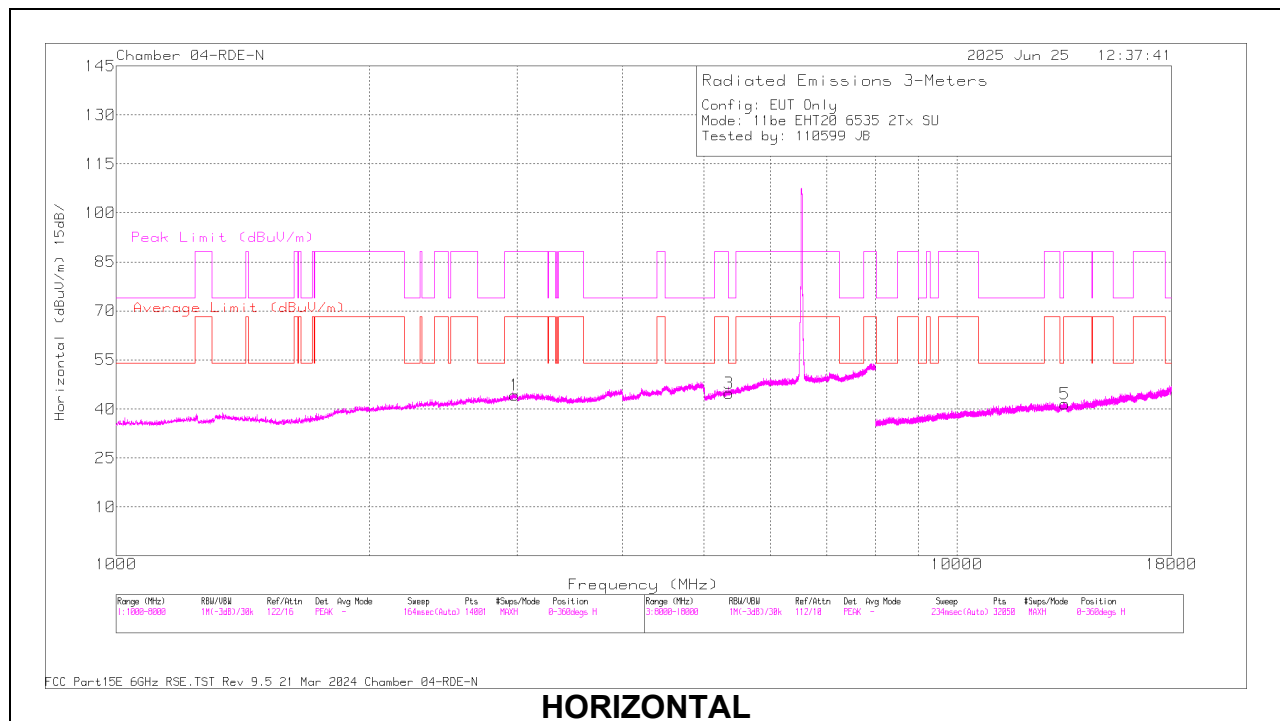
20MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F lter/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6535	6 + 5	* 5.373841	45.65	PK-U	34.4	-24.15	0	55.9	-	-	74	-18.1	357	367	H
			* 5.358154	33.67	ADR	34.4	-24.13	0.13	44.07	54	-9.93	-	-	357	367	H
			* 13.399546	56.25	PK-U	39	-43.49	0	51.76	-	-	74	-22.24	253	150	V
			2.969975	47.06	PK-U	32.8	-25.71	0	54.15	-	-	88.2	-34.05	266	245	H
			2.974013	46.44	PK-U	32.8	-25.72	0	53.52	-	-	88.2	-34.68	352	382	V
			2.974819	34.98	ADR	32.8	-25.72	0.13	42.19	68.2	-26.01	-	-	352	382	V
			2.978538	34.86	ADR	32.8	-25.73	0.13	42.06	68.2	-26.14	-	-	266	245	H
			5.337161	33.83	ADR	34.4	-24.1	0.13	44.26	68.2	-23.94	-	-	13	319	V
			5.338609	45.39	PK-U	34.4	-24.11	0	55.68	-	-	88.2	-32.52	13	319	V
			13.41922	44.17	ADR	39	-43.1	0.13	40.2	68.2	-28	-	-	253	150	V
			13.43042	55.49	PK-U	38.9	-43.23	0	51.16	-	-	88.2	-37.04	58	143	H
			13.459342	44.2	ADR	38.9	-43.37	0.13	39.86	68.2	-28.34	-	-	58	143	H
	6715	6 + 5	* 3.872972	45.44	PK-U	33.8	-25.37	0	53.87	-	-	74	-20.13	357	376	H
			* 3.878065	34.35	ADR	33.8	-25.39	0.13	42.89	54	-11.11	-	-	357	376	H
			* 3.894744	47.03	PK-U	33.9	-25.28	0	55.65	-	-	74	-18.35	225	267	V
			* 3.888681	34.44	ADR	33.9	-25.33	0.13	43.14	54	-10.86	-	-	225	267	V
			2.41107	34.73	ADR	32.1	-26.52	0.13	40.44	68.2	-27.76	-	-	227	256	H
			2.416562	46.28	PK-U	32.1	-26.49	0	51.89	-	-	88.2	-36.31	252	261	V
			2.419664	46.26	PK-U	32.2	-26.54	0	51.92	-	-	88.2	-36.28	227	256	H
			2.423176	34.64	ADR	32.2	-26.54	0.13	40.43	68.2	-27.77	-	-	252	261	V
			13.476932	55.64	PK-U	38.9	-43.19	0	51.35	-	-	88.2	-36.85	135	347	V
			13.490889	56.04	PK-U	38.9	-43.19	0	51.75	-	-	88.2	-36.45	181	398	H
			13.49571	44.36	ADR	38.8	-43.28	0.13	40.01	68.2	-28.19	-	-	135	347	V
			13.521656	44.31	ADR	38.8	-43.64	0.13	39.6	68.2	-28.6	-	-	181	398	H
	6875 (Straddle)	6 + 5	3.223142	46.19	PK-U	33	-25.54	0	53.65	-	-	88.2	-34.55	82	311	H
			3.223241	34.18	ADR	33	-25.54	0.13	41.77	68.2	-26.43	-	-	357	155	V
			3.231813	34.12	ADR	33	-25.67	0.13	41.58	68.2	-26.62	-	-	82	311	H
			3.234606	45.54	PK-U	33	-25.65	0	52.89	-	-	88.2	-35.31	357	155	V
			5.598595	33.9	ADR	34.6	-23.79	0.13	44.84	68.2	-23.36	-	-	1	100	H
			5.609464	45.58	PK-U	34.7	-23.72	0	56.56	-	-	88.2	-31.64	357	149	V
			5.61982	33.79	ADR	34.7	-23.7	0.13	44.92	68.2	-23.28	-	-	357	149	V
			5.627485	46.06	PK-U	34.7	-23.74	0	57.02	-	-	88.2	-31.18	1	100	H
			12.816795	44.03	ADR	39	-43.76	0.13	39.4	68.2	-28.8	-	-	5	268	V
			12.823245	55.87	PK-U	39	-43.68	0	51.19	-	-	88.2	-37.01	5	268	V
			12.833876	56.01	PK-U	39	-43.74	0	51.27	-	-	88.2	-36.93	33	373	H
			12.850225	44.4	ADR	39	-43.84	0.13	39.69	68.2	-28.51	-	-	33	373	H
11be (Partial RU Mode / Highest PSD)	6535 (26T)	6 + 5	1.99941	61.46	PK-U	32.1	-49.8	0	43.76	-	-	88.2	-44.44	0	101	H
			1.998903	49.87	ADR	32.1	-49.8	0	32.17	68.2	-36.03	-	-	0	101	H
			3.112387	58.46	PK-U	33.2	-48.16	0	43.5	-	-	88.2	-44.7	0	200	H
			3.103428	46.69	ADR	33.1	-48.16	0	31.63	68.2	-36.57	-	-	0	200	H
			1.993166	61.48	PK-U	32	-49.81	0	43.67	-	-	88.2	-44.53	0	200	V
			1.997481	49.86	ADR	32.1	-49.81	0	32.15	68.2	-36.05	-	-	0	200	V
			3.104921	58.42	PK-U	33.1	-48.16	0	43.36	-	-	88.2	-44.84	0	200	V
			3.108302	46.63	ADR	33.1	-48.15	0	31.58	68.2	-36.62	-	-	0	200	V
			* 11.810366	55.86	PK-U	38.8	-44.1	0	50.56	-	-	74	-23.44	0	200	H
			* 11.828268	43.82	ADR	38.8	-44.11	0	38.51	54	-15.49	-	-	0	200	H
			* 11.822821	55.25	PK-U	38.8	-44.12	0	49.93	-	-	74	-24.07	0	200	V
			* 11.818201	43.68	ADR	38.8	-44.16	0	38.32	54	-15.68	-	-	0	200	V
	6715 (26T)	6 + 5	1.950384	62.58	PK-U	31.4	-50.17	0	43.81	-	-	88.2	-44.39	0	199	H
			1.939345	50.55	ADR	31.5	-50.28	0	31.77	68.2	-36.43	-	-	0	199	H
			3.246541	57.96	PK-U	32.8	-47.95	0	42.81	-	-	88.2	-45.39	0	101	H
			3.211021	46.33	ADR	32.8	-47.87	0	31.26	68.2	-36.94	-	-	0	101	H
			1.948416	62.42	PK-U	31.4	-50.19	0	43.63	-	-	88.2	-44.57	0	172	V
			1.944296	50.52	ADR	31.5	-50.21	0	31.81	68.2	-36.39	-	-	0	172	V
			3.246449	57.93	PK-U	32.8	-47.94	0	42.79	-	-	88.2	-45.41	0	101	V
			3.224941	46.43	ADR	32.8	-47.94	0	31.29	68.2	-36.91	-	-	0	101	V
			10.817236	56.9	PK-U	37.6	-44.91	0	49.59	-	-	74	-24.41	0	101	H
			10.817268	44.45	ADR	37.6	-44.91	0	37.14	54	-16.86	-	-	0	101	H
			10.821819	56.36	PK-U	37.6	-44.92	0	49.04	-	-	74	-24.96	0	200	V
			10.824639	44.66	ADR	37.6	-44.89	0	37.37	54	-16.63	-	-	0	200	V
	6875 (Straddle) (26T)	6 + 5	2.05238	61.08	PK-U	32	-50.02	0	43.06	-	-	88.2	-45.14	1	200	H
			2.05662	49.45	ADR	32	-50.06	0	31.39	68.2	-36.81	-	-	1	200	H
			2.935859	59.36	PK-U	32.8	-48.95	0	43.21	-	-	88.2	-44.99	1	200	H
			2.93089	47.67	ADR	32.8	-48.97	0	31.5	68.2	-36.7	-	-	1	200	H
			2.052401	61.41	PK-U	32	-50.02	0	43.39	-	-	88.2	-44.81	1	200	V
			2.048272	49.58	ADR	32	-49.97	0	31.61	68.2	-36.59	-	-	1	200	V
			2.930755	59.8	PK-U	32.8	-48.97	0	43.63	-	-	88.2	-44.57	1	200	V
			2.926489	47.65	ADR	32.8	-48.95	0	31.5	68.2	-36.7	-	-	1	200	V
			11.949806	54.5	PK-U	39	-43.77	0	49.73	-	-	74	-24.27	1	101	H
			11.961737	42.7	ADR	39	-43.64	0	38.06	54	-15.94	-	-	1	101	H
			11.960093	54.75	PK-U	39	-43.69	0	50.06	-	-	74	-23.94	1	101	V
			11.958629	42.92	ADR	39	-43.72	0	38.2	54	-15.8	-	-	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6535MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.373841	45.65	PK-U	34.4	0	-24.15	55.9	-	-	74	-18.1	357	367	H
* 5.358154	33.67	ADR	34.4	0.13	-24.13	44.07	54	-9.93	-	-	357	367	H
* 13.399546	56.25	PK-U	39	0	-43.49	51.76	-	-	74	-22.24	253	150	V
2.969975	47.06	PK-U	32.8	0	-25.71	54.15	-	-	88.2	-34.05	266	245	H
2.974013	46.44	PK-U	32.8	0	-25.72	53.52	-	-	88.2	-34.68	352	382	V
2.974819	34.98	ADR	32.8	0.13	-25.72	42.19	68.2	-26.01	-	-	352	382	V
2.978538	34.86	ADR	32.8	0.13	-25.73	42.06	68.2	-26.14	-	-	266	245	H
5.337161	33.83	ADR	34.4	0.13	-24.1	44.26	68.2	-23.94	-	-	13	319	V
5.338609	45.39	PK-U	34.4	0	-24.11	55.68	-	-	88.2	-32.52	13	319	V
13.41922	44.17	ADR	39	0.13	-43.1	40.2	68.2	-28	-	-	253	150	V
13.43042	55.49	PK-U	38.9	0	-43.23	51.16	-	-	88.2	-37.04	58	143	H
13.459342	44.2	ADR	38.9	0.13	-43.37	39.86	68.2	-28.34	-	-	58	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

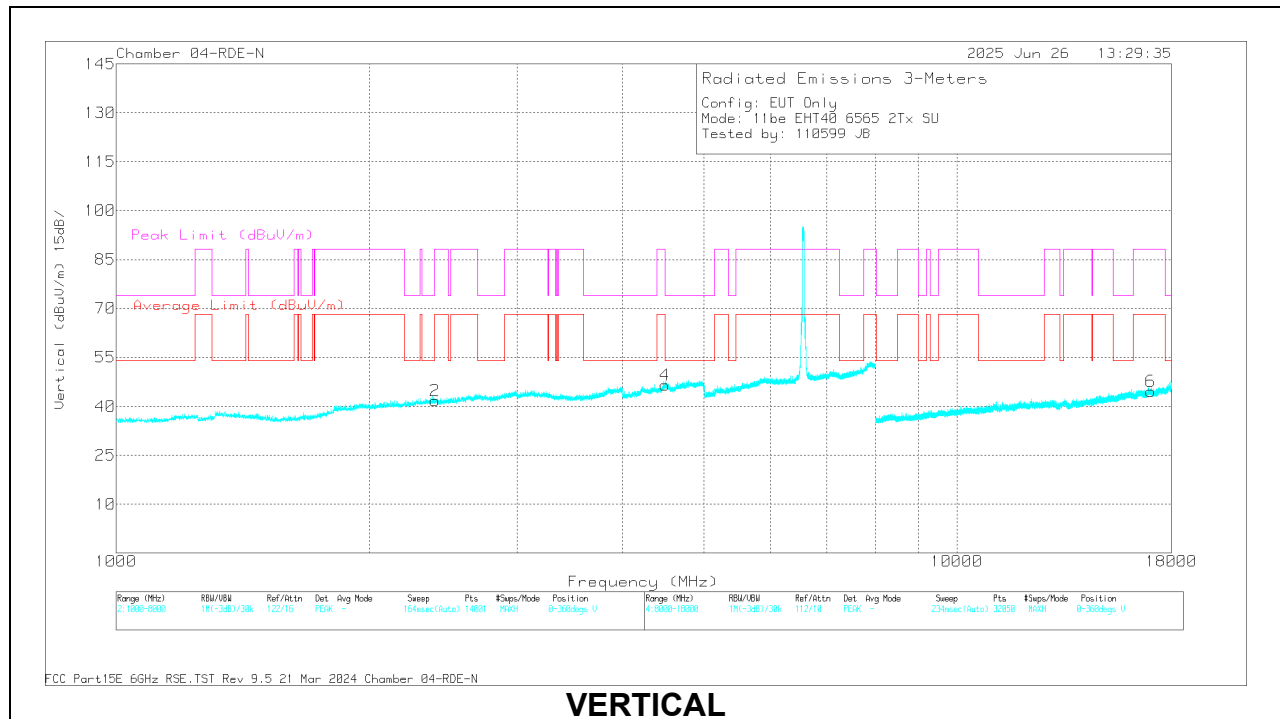
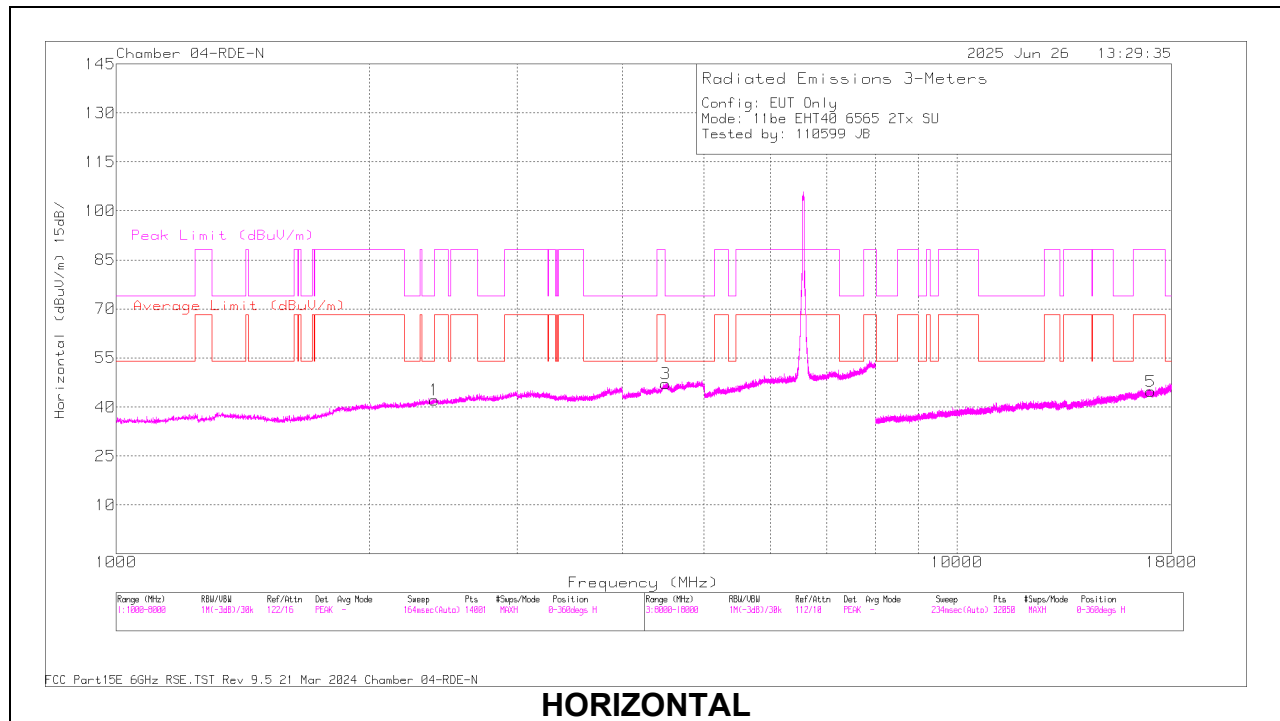
40MHz

UNI-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6565	6 + 5	* 4.50334	46.75	PK-U	33.9	-24.83	0	55.82	-	-	74	-18.18	40	223	H
			* 2.383605	46.61	PK-U	32	-26.54	0	52.07	-	-	74	-21.93	300	292	V
			* 4.504062	35.06	ADR	33.9	-24.82	0.23	44.37	54	-9.63	-	-	37	149	V
			2.407908	34.71	ADR	32.1	-26.57	0.23	40.47	68.2	-27.73	-	-	343	245	H
			2.409462	46.45	PK-U	32.1	-26.54	0	52.01	-	-	88.2	-36.19	343	245	H
			2.409926	35.03	ADR	32.1	-26.53	0.23	40.83	68.2	-27.37	-	-	300	292	V
			4.487417	46.64	PK-U	33.9	-24.81	0	55.73	-	-	88.2	-32.47	37	149	V
			4.494446	34.98	ADR	33.9	-24.76	0.23	44.35	68.2	-23.85	-	-	40	223	H
			16.989027	44.46	ADR	40.6	-42.77	0.23	42.52	68.2	-25.68	-	-	185	178	V
			16.991945	56.07	PK-U	40.6	-42.76	0	53.91	-	-	88.2	-34.29	185	178	V
			17.000365	44.39	ADR	40.6	-42.88	0.23	42.34	68.2	-25.86	-	-	13	277	H
			17.022149	56.03	PK-U	40.6	-43.01	0	53.62	-	-	88.2	-34.58	13	277	H
			* 4.375628	46.93	PK-U	33.8	-25.18	0	55.55	-	-	74	-18.45	43	330	H
			* 4.374051	35.09	ADR	33.8	-25.18	0.23	43.94	54	-10.06	-	-	43	330	H
			* 4.365118	46.59	PK-U	33.8	-25.08	0	55.31	-	-	74	-18.69	269	215	V
			* 4.379774	34.87	ADR	33.8	-25.19	0.23	43.71	54	-10.29	-	-	269	215	V
	6685	6 + 5	* 11.147486	56.33	PK-U	38	-43.9	0	50.43	-	-	74	-23.57	357	129	H
			* 11.156017	44.66	ADR	38	-44.09	0.23	38.8	54	-15.2	-	-	357	129	H
			* 11.119476	55.97	PK-U	38	-44.55	0	49.42	-	-	74	-24.58	176	229	V
			* 11.119863	44.7	ADR	38	-44.56	0.23	38.37	54	-15.63	-	-	176	229	V
			2.39668	46.61	PK-U	32	-26.52	0	52.09	-	-	88.2	-36.11	212	276	V
			2.408854	46.84	PK-U	32.1	-26.55	0	52.39	-	-	88.2	-35.81	222	223	H
			2.409725	34.87	ADR	32.1	-26.54	0.23	40.66	68.2	-27.54	-	-	222	223	H
			2.416019	34.71	ADR	32.1	-26.47	0.23	40.57	68.2	-27.63	-	-	212	276	V
			* 11.144797	55.83	PK-U	38	-43.89	0	49.94	-	-	74	-24.06	305	275	H
			* 11.117225	44.6	ADR	38	-44.6	0.23	38.23	54	-15.77	-	-	305	275	H
			2.94942	46.16	PK-U	32.7	-25.8	0	53.06	-	-	88.2	-35.14	346	295	V
			2.958571	34.79	ADR	32.7	-25.78	0.23	41.94	68.2	-26.26	-	-	346	295	V
			3.225943	45.79	PK-U	33	-25.6	0	53.19	-	-	88.2	-35.01	214	252	H
			3.236013	34.16	ADR	33	-25.62	0.23	41.77	68.2	-26.43	-	-	214	252	H
			10.130205	45.23	ADR	37.6	-45.69	0.23	37.37	68.2	-30.83	-	-	307	199	V
			10.139523	56.81	PK-U	37.6	-45.53	0	48.88	-	-	88.2	-39.32	307	199	V
	6845	6 + 5	13.441303	55.78	PK-U	38.9	-43.35	0	51.33	-	-	88.2	-36.87	17	105	V
			13.46062	44.2	ADR	38.9	-43.35	0.23	39.98	68.2	-28.22	-	-	17	105	V
			14.705108	57.28	PK-U	39.7	-44.18	0	52.8	-	-	88.2	-35.4	149	208	H
			14.722708	44.98	ADR	39.7	-44.23	0.23	40.68	68.2	-27.52	-	-	149	208	H
	6565 (26T)	6 + 5	* 2.259059	49.83	ADR	32.1	-50.94	0	30.99	54	-23.01	-	-	146	342	H
			* 2.262068	61.51	PK-U	32.1	-50.9	0	42.71	-	-	74	-31.29	146	342	H
			* 2.265107	49.7	ADR	32.1	-50.92	0	30.88	54	-23.12	-	-	239	220	V
			* 2.265661	61.08	PK-U	32.1	-50.89	0	42.29	-	-	74	-31.71	239	220	V
			* 4.338993	58.77	PK-U	34.3	-48.01	0	45.06	-	-	74	-28.94	356	231	H
			* 4.339261	47.26	ADR	34.3	-48.02	0	33.54	54	-20.46	-	-	356	231	H
			* 4.341826	47.01	ADR	34.3	-48.01	0	33.3	54	-20.7	-	-	69	162	V
			* 4.343699	58.56	PK-U	34.3	-48.02	0	44.84	-	-	74	-29.16	69	162	V
			* 12.417856	43.5	ADR	39	-44.1	0	38.4	54	-15.6	-	-	4	120	H
			* 12.418364	54.66	PK-U	39	-44.11	0	49.55	-	-	74	-24.45	4	120	H
			* 12.421173	43.51	ADR	39	-44.16	0	38.35	54	-15.65	-	-	159	187	V
			* 12.421315	54.81	PK-U	39	-44.17	0	49.64	-	-	74	-24.36	159	187	V
			* 2.24601	61.59	PK-U	32.2	-50.91	0	42.88	-	-	74	-31.12	324	325	V
			* 2.24608	49.78	ADR	32.2	-50.91	0	31.07	54	-22.93	-	-	324	325	V
			* 2.254562	61.39	PK-U	32.2	-50.9	0	42.69	-	-	74	-31.31	181	297	H
	6685 (26T)	6 + 5	* 2.256256	49.7	ADR	32.2	-50.9	0	31	54	-23	-	-	181	297	H
			* 4.34053	58.74	PK-U	34.3	-48.03	0	45.01	-	-	74	-28.99	121	345	H
			* 4.341233	46.94	ADR	34.3	-48.03	0	33.21	54	-20.79	-	-	121	345	H
			* 4.342385	47.03	ADR	34.3	-48.01	0	33.32	54	-20.68	-	-	285	383	V
			* 4.345184	58.89	PK-U	34.3	-48.01	0	45.18	-	-	74	-28.82	285	383	V
			* 12.169072	44.56	ADR	38.9	-44.27	0	39.19	54	-14.81	-	-	239	188	H
			* 12.170925	55.78	PK-U	38.9	-44.33	0	50.35	-	-	74	-23.65	239	188	H
			* 12.171325	44.6	ADR	38.9	-44.31	0	39.19	54	-14.81	-	-	278	137	V
			* 12.173372	56.36	PK-U	38.9	-44.27	0	50.99	-	-	74	-23.01	278	137	V
			* 2.279282	61.58	PK-U	31.8	-50.32	0	43.06	-	-	74	-30.94	219	219	H
	6845 (Straddle) (26T)	6 + 5	* 2.274163	49.28	ADR	31.8	-50.31	0	30.77	54	-23.23	-	-	219	219	H
			* 3.600789	58.38	PK-U	33.8	-47.69	0	44.49	-	-	74	-29.51	113	298	H
			* 3.603446	46.34	ADR	33.8	-47.66	0	32.48	54	-21.52	-	-	113	298	H
			* 2.273688	60.74	PK-U	31.8	-50.31	0	42.23	-	-	74	-31.77	329	145	V
			* 2.278065	49.28	ADR	31.8	-50.32	0	30.76	54	-23.24	-	-	329	145	V
			* 3.601024	58.59	PK-U	33.8	-47.69	0	44.7	-	-	74	-29.3	199	217	V
			3.599251	46.52	ADR	33.8	-47.67	0	32.65	68.2	-35.55	-	-	199	217	V
			13.904653	55.03	PK-U	39	-44.02	0	50.01	-	-	88.2	-38.19	49	261	H
			13.904521	43.37	ADR	39	-44.02	0	38.35	68.2	-29.85	-	-	49	261	H
			13.906987	54.55	PK-U	39	-44	0	49.55	-	-	88.2	-38.65	256	167	V
			13.908487	43.16	ADR	39	-44.04	0	38.12	68.2	-30.08	-	-	256	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6565MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.50334	46.75	PK-U	33.9	0	-24.83	55.82	-	-	74	-18.18	40	223	H
* 2.383605	46.61	PK-U	32	0	-26.54	52.07	-	-	74	-21.93	300	292	V
* 4.504062	35.06	ADR	33.9	0.23	-24.82	44.37	54	-9.63	-	-	37	149	V
2.407908	34.71	ADR	32.1	0.23	-26.57	40.47	68.2	-27.73	-	-	343	245	H
2.409462	46.45	PK-U	32.1	0	-26.54	52.01	-	-	88.2	-36.19	343	245	H
2.409926	35.03	ADR	32.1	0.23	-26.53	40.83	68.2	-27.37	-	-	300	292	V
4.487417	46.64	PK-U	33.9	0	-24.81	55.73	-	-	88.2	-32.47	37	149	V
4.494446	34.98	ADR	33.9	0.23	-24.76	44.35	68.2	-23.85	-	-	40	223	H
16.989027	44.46	ADR	40.6	0.23	-42.77	42.52	68.2	-25.68	-	-	185	178	V
16.991945	56.07	PK-U	40.6	0	-42.76	53.91	-	-	88.2	-34.29	185	178	V
17.000365	44.39	ADR	40.6	0.23	-42.88	42.34	68.2	-25.86	-	-	13	277	H
17.022149	56.03	PK-U	40.6	0	-43.01	53.62	-	-	88.2	-34.58	13	277	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

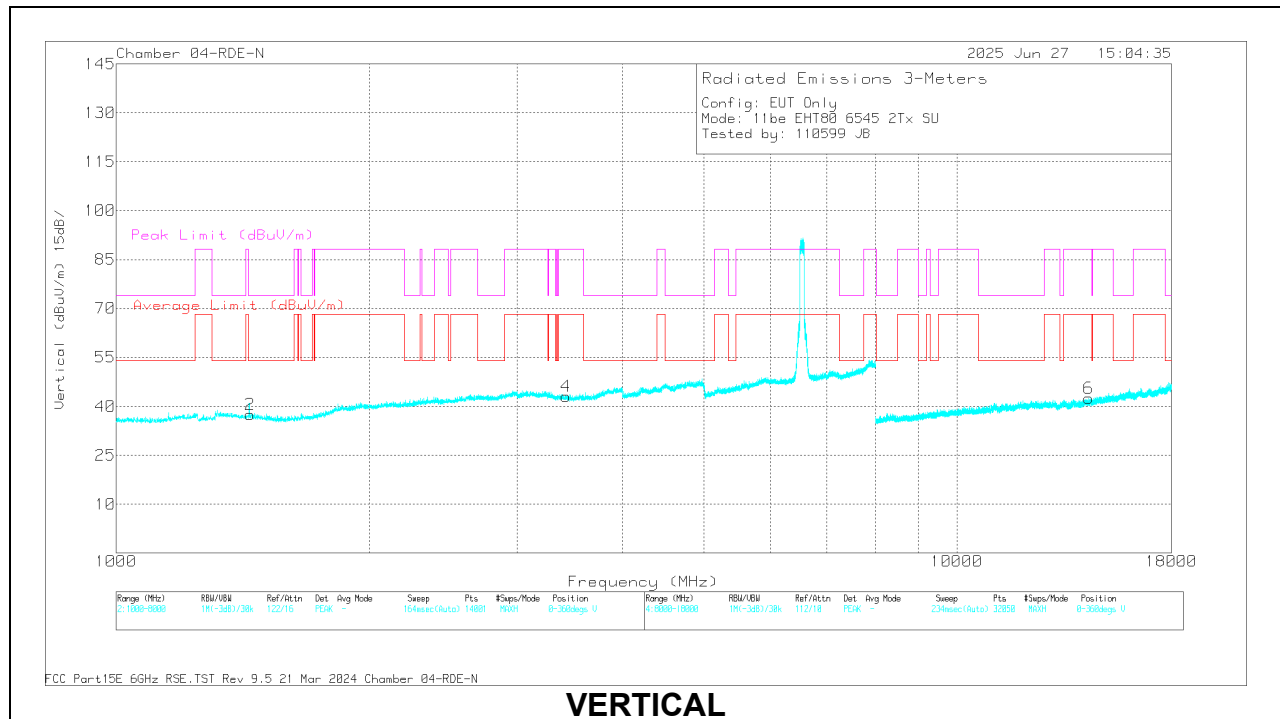
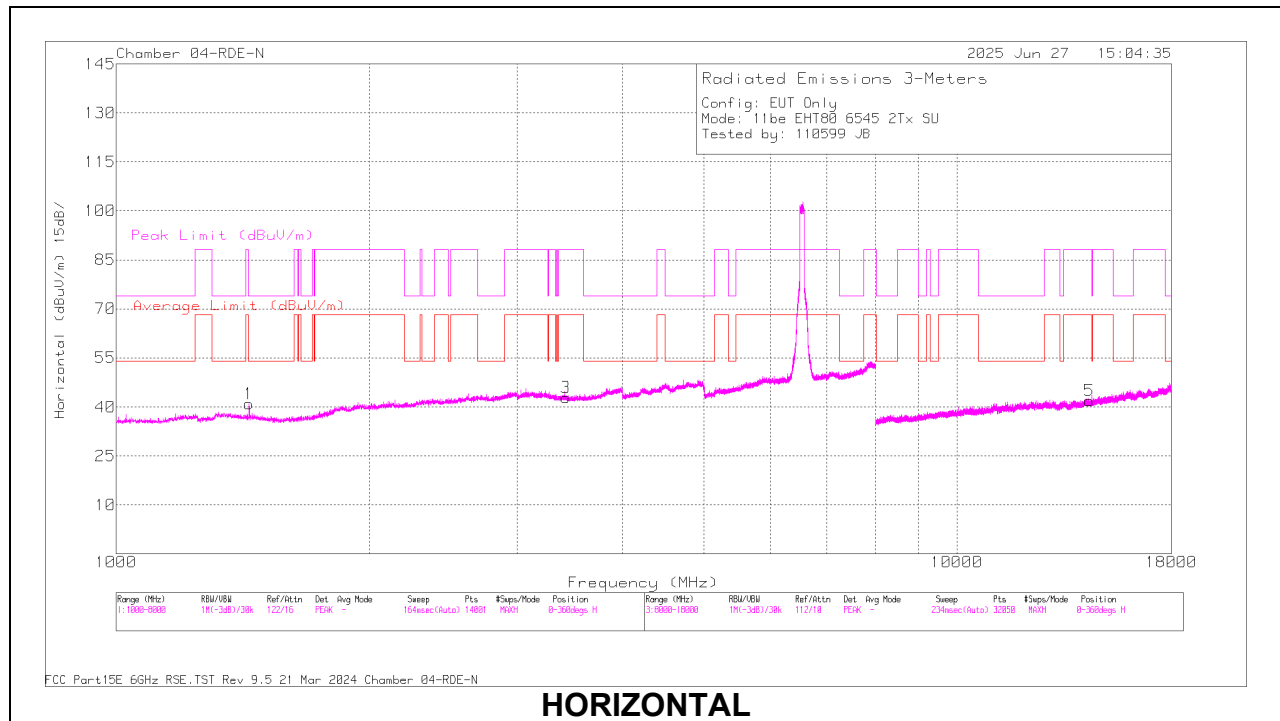
80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6545 (Straddle)	6 + 5	* 1.43957	47.06	PK-U	28.5	-27.33	0	48.23	-	-	74	-25.77	264	133	H
			* 1.43993	38.87	ADR	28.5	-27.33	0.41	40.45	54	-13.55	-	-	264	133	H
			* 1.440062	46.02	PK-U	28.5	-27.33	0	47.19	-	-	74	-26.81	244	188	V
			* 1.440025	35.44	ADR	28.5	-27.33	0.41	37.02	54	-16.98	-	-	244	188	V
			3.411872	46.24	PK-U	32.9	-25.37	0	53.77	-	-	88.2	-34.43	357	272	V
			3.419616	45.65	PK-U	32.9	-25.31	0	53.24	-	-	88.2	-34.96	337	132	H
			3.432418	33.63	ADR	33	-25.46	0.41	41.58	68.2	-26.62	-	-	337	132	H
			3.434311	33.76	ADR	33	-25.46	0.41	41.71	68.2	-26.49	-	-	357	272	V
			14.335383	56.93	PK-U	39.3	-44.31	0	51.92	-	-	88.2	-36.28	68	173	V
			14.344514	56.68	PK-U	39.3	-44.2	0	51.78	-	-	88.2	-36.42	267	251	H
			14.354143	45.14	ADR	39.3	-44.08	0.41	40.77	68.2	-27.43	-	-	68	173	V
			14.36611	44.89	ADR	39.3	-44.15	0.41	40.45	68.2	-27.75	-	-	267	251	H
	6705	6 + 5	* 1.446708	46.4	PK-U	28.4	-27.36	0	47.44	-	-	74	-26.56	45	197	H
			* 1.440108	37.09	ADR	28.5	-27.33	0.41	38.67	54	-15.33	-	-	45	197	H
			* 3.554772	45.56	PK-U	33.2	-25.35	0	53.41	-	-	88.2	-34.79	213	156	H
			* 3.55964	34.25	ADR	33.2	-25.4	0.41	42.46	68.2	-25.74	-	-	213	156	H
			* 1.439819	34.57	ADR	28.5	-27.33	0.41	36.15	54	-17.85	-	-	203	136	V
			* 3.547604	45.8	PK-U	33.2	-25.38	0	53.62	-	-	88.2	-34.58	357	385	V
			* 3.582776	34.08	ADR	33.2	-25.48	0.41	42.21	68.2	-25.99	-	-	357	385	V
			1.433239	45.75	PK-U	28.5	-27.4	0	46.85	-	-	88.2	-41.35	203	136	V
			13.485472	55.79	PK-U	38.9	-43.18	0	51.51	-	-	88.2	-36.69	150	129	V
			13.493162	44.35	ADR	38.9	-43.21	0.41	40.45	68.2	-27.75	-	-	150	129	V
			13.499503	44.37	ADR	38.8	-43.31	0.41	40.27	68.2	-27.93	-	-	358	365	H
			13.504852	56.29	PK-U	38.8	-43.55	0	51.54	-	-	88.2	-36.66	358	365	H
	6865 (Straddle)	6 + 5	* 1.440888	46.41	PK-U	28.5	-27.31	0	47.6	-	-	74	-26.4	3	310	H
			* 1.439945	36.54	ADR	28.5	-27.33	0.41	38.12	54	-15.88	-	-	3	310	H
			* 1.440202	48.02	PK-U	28.5	-27.33	0	49.19	-	-	74	-24.81	145	209	V
			* 1.440033	40.1	ADR	28.5	-27.33	0.41	41.68	54	-12.32	-	-	145	209	V
			3.111635	34.1	ADR	33	-25.48	0.41	42.03	68.2	-26.17	-	-	157	196	V
			3.126428	45.67	PK-U	33	-25.45	0	53.22	-	-	88.2	-34.98	157	196	V
			3.128894	34.35	ADR	33	-25.42	0.41	42.34	68.2	-25.86	-	-	10	316	H
			3.129103	45.74	PK-U	33	-25.42	0	53.32	-	-	88.2	-34.88	10	316	H
			10.188357	45.38	ADR	37.7	-45.33	0.41	38.16	68.2	-30.04	-	-	263	386	V
			10.191751	56.69	PK-U	37.7	-45.25	0	49.14	-	-	88.2	-39.06	263	386	V
			10.215888	44.92	ADR	37.8	-44.98	0.41	38.15	68.2	-30.05	-	-	13	353	H
			10.223856	56.86	PK-U	37.8	-44.98	0	49.68	-	-	88.2	-38.52	13	353	H
	6545 (Straddle) (26T)	6 + 5	1.990187	61.35	PK-U	32	-49.82	0	43.53	-	-	88.2	-44.67	360	101	H
			1.993694	49.79	ADR	32	-49.81	0.09	32.07	68.2	-36.13	-	-	360	101	H
			3.250039	58.25	PK-U	32.8	-47.96	0	43.09	-	-	88.2	-45.11	360	101	H
			3.269215	46.6	ADR	32.8	-47.91	0.09	31.58	68.2	-36.62	-	-	360	101	H
			1.999372	61.37	PK-U	32.1	-49.8	0	43.67	-	-	88.2	-44.53	360	199	V
			1.998265	49.9	ADR	32.1	-49.81	0.09	32.28	68.2	-35.92	-	-	360	199	V
			3.253518	58.4	PK-U	32.8	-47.88	0	43.32	-	-	88.2	-44.88	360	101	V
			* 3.265263	46.57	ADR	32.8	-47.98	0.09	31.48	54	-22.52	-	-	360	101	V
			* 11.91824	55.02	PK-U	39	-43.27	0	50.75	-	-	74	-23.25	360	200	H
			* 11.932083	43.16	ADR	39	-43.59	0.09	38.66	54	-15.34	-	-	360	200	H
			* 11.931371	54.6	PK-U	39	-43.54	0	50.06	-	-	74	-23.94	360	101	V
			* 11.941082	43.09	ADR	39	-43.74	0.09	38.44	54	-15.56	-	-	360	101	V
		6 + 5	2.057696	60.83	PK-U	32	-50.05	0	42.78	-	-	88.2	-45.42	360	200	H
			2.053852	49.44	ADR	32	-50.03	0.09	31.5	68.2	-36.7	-	-	360	200	H
			* 3.636622	57.89	PK-U	33.3	-47.69	0	43.5	-	-	74	-30.5	360	200	H
			* 3.6398	46.53	ADR	33.3	-47.71	0.09	32.21	54	-21.79	-	-	360	200	H
			2.052157	61.06	PK-U	32	-50.01	0	43.05	-	-	88.2	-45.15	360	200	V
			2.054557	49.29	ADR	32	-50.03	0.09	31.35	68.2	-36.85	-	-	360	200	V
			* 3.641561	58.19	PK-U	33.3	-47.7	0	43.79	-	-	74	-30.21	360	200	V
			* 3.642218	46.38	ADR	33.3	-47.7	0.09	32.07	54	-21.93	-	-	360	200	V
			* 11.164281	56.69	PK-U	37.6	-44.68	0	49.61	-	-	74	-24.39	360	200	H
			* 11.143171	44.23	ADR	37.6	-44.06	0.09	37.86	54	-16.14	-	-	360	200	H
			* 11.146875	55.73	PK-U	37.6	-44.21	0	49.12	-	-	74	-24.88	360	200	V
			* 11.146291	44.24	ADR	37.6	-44.19	0.09	37.74	54	-16.26	-	-	360	200	V
	6865 (Straddle) (26T)	6 + 5	2.941856	60.04	PK-U	32.8	-49.01	0	43.83	-	-	88.2	-44.37	167	274	H
			2.935772	47.59	ADR	32.8	-48.95	0.09	31.53	68.2	-36.67	-	-	167	274	H
			2.937854	59.26	PK-U	32.8	-48.96	0	43.1	-	-	88.2	-45.1	287	339	V
			2.929139	47.7	ADR	32.8	-48.97	0.09	31.62	68.2	-36.58	-	-	287	339	V
			* 12.620805	55.75	PK-U	39	-43.55	0	51.2	-	-	74	-22.8	17	239	H
			* 12.6301	43.38	ADR	39	-43.56	0.09	38.91	54	-15.09	-	-	17	239	H
			17.224293	54.21	PK-U	41.4	-41.03	0	54.58	-	-	88.2	-33.62	120	237	H
			17.217197	42.27	ADR	41.4	-41.09	0.09	42.67	68.2	-25.53	-	-	120	237	H
			* 12.632322	55.15	PK-U	39	-43.52	0	50.63	-	-	74	-23.37	37	203	V
			* 12.656308	43.32	ADR	39	-43.13	0.09	39.28	54	-14.72	-	-	37	203	V
			17.231836	54.36	PK-U	41.4	-40.89	0	54.87	-	-	88.2	-33.33	343	271	V
			17.222453	42.31	ADR	41.4	-41.08	0.09	42.72	68.2	-25.48	-	-	343	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6545MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.43957	47.06	PK-U	28.5	0	-27.33	48.23	-	-	74	-25.77	264	133	H
* 1.43993	38.87	ADR	28.5	0.41	-27.33	40.45	54	-13.55	-	-	264	133	H
* 1.440062	46.02	PK-U	28.5	0	-27.33	47.19	-	-	74	-26.81	244	188	V
* 1.440025	35.44	ADR	28.5	0.41	-27.33	37.02	54	-16.98	-	-	244	188	V
3.411872	46.24	PK-U	32.9	0	-25.37	53.77	-	-	88.2	-34.43	357	272	V
3.419616	45.65	PK-U	32.9	0	-25.31	53.24	-	-	88.2	-34.96	337	132	H
3.432418	33.63	ADR	33	0.41	-25.46	41.58	68.2	-26.62	-	-	337	132	H
3.434311	33.76	ADR	33	0.41	-25.46	41.71	68.2	-26.49	-	-	357	272	V
14.335383	56.93	PK-U	39.3	0	-44.31	51.92	-	-	88.2	-36.28	68	173	V
14.344514	56.68	PK-U	39.3	0	-44.2	51.78	-	-	88.2	-36.42	267	251	H
14.354143	45.14	ADR	39.3	0.41	-44.08	40.77	68.2	-27.43	-	-	68	173	V
14.36611	44.89	ADR	39.3	0.41	-44.15	40.45	68.2	-27.75	-	-	267	251	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

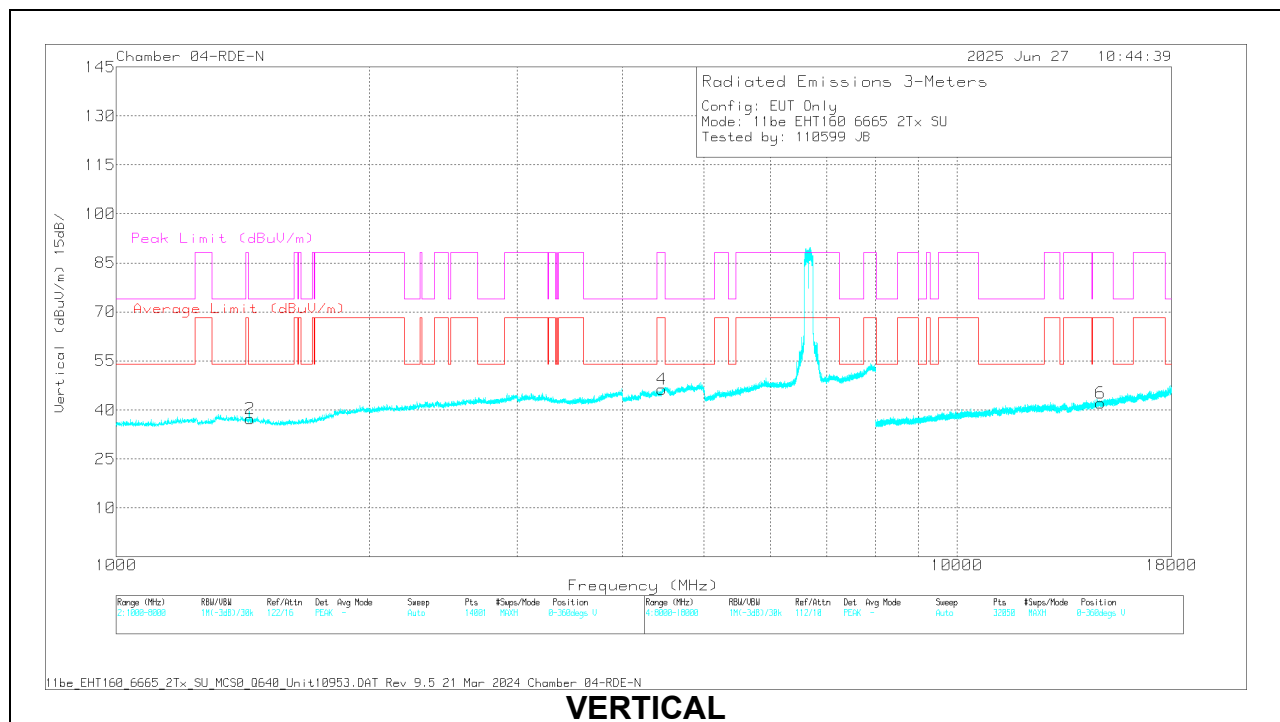
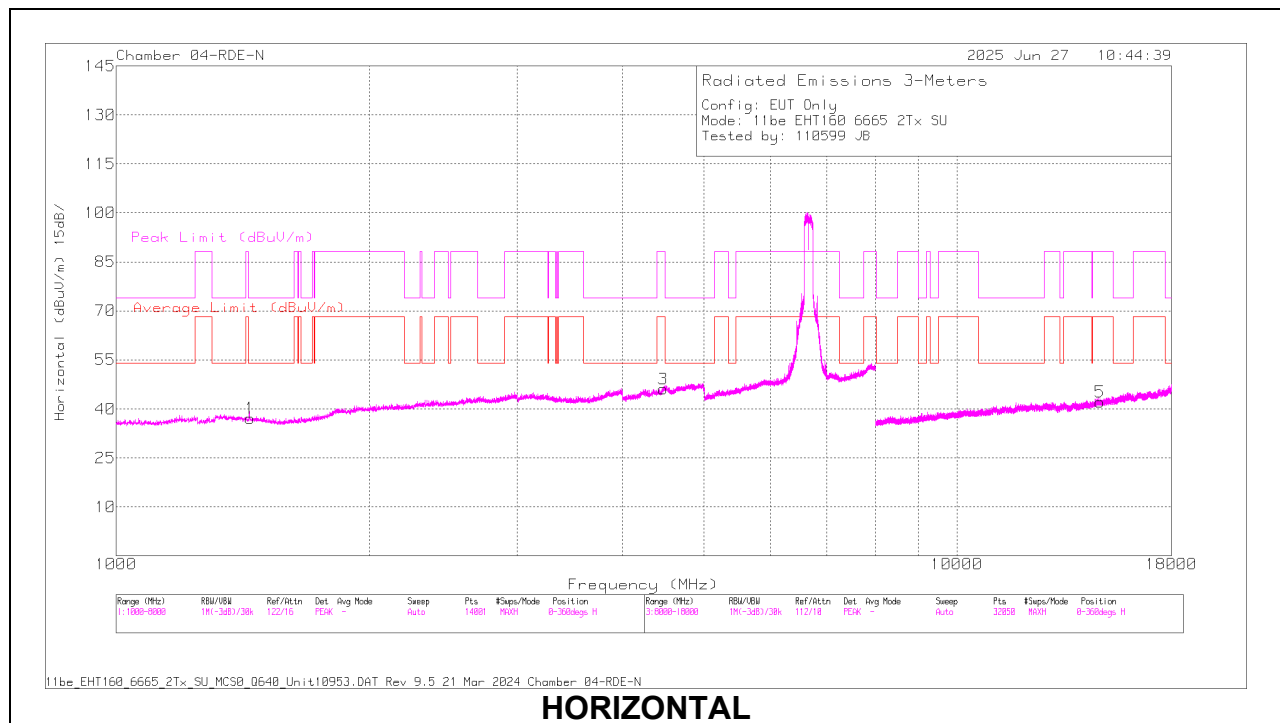
160MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6665	6 + 5	* 1.44015	47.66	PK-U	28.5	-27.33	0	48.83	-	-	74	-25.17	187	297	H
			* 1.440073	38.79	ADR	28.5	-27.33	0.61	40.57	54	-13.43	-	-	187	297	H
			* 1.439519	45.93	PK-U	28.5	-27.33	0	47.1	-	-	74	-26.9	22	381	V
			* 1.440122	34.94	ADR	28.5	-27.33	0.61	36.72	54	-17.28	-	-	22	381	V
			4.45908	35.09	ADR	33.8	-25.07	0.61	44.43	68.2	-23.77	-	-	1	201	V
			4.472245	46.43	PK-U	33.8	-24.98	0	55.25	-	-	88.2	-32.95	1	201	V
			4.472302	35.02	ADR	33.8	-24.98	0.61	44.45	68.2	-23.75	-	-	104	149	H
			4.489518	47.26	PK-U	33.9	-24.79	0	56.37	-	-	88.2	-31.83	104	149	H
			14.792519	56.65	PK-U	39.8	-44.14	0	52.31	-	-	88.2	-35.89	311	102	H
			14.813352	45.05	ADR	39.8	-44.11	0.61	41.35	68.2	-26.85	-	-	311	102	H
	14.833685	44.99	ADR	39.8	-44.25	0.61	41.15	68.2	-27.05	-	-	258	140	V		
	14.837828	57.11	PK-U	39.8	-44.17	0	52.74	-	-	88.2	-35.46	258	140	V		
	6825 (Straddle)	6 + 5	* 1.440209	47.1	PK-U	28.5	-27.33	0	48.27	-	-	74	-25.73	327	103	H
			* 1.439846	38.45	ADR	28.5	-27.33	0.61	40.23	54	-13.77	-	-	327	103	H
			* 1.440343	47.51	PK-U	28.5	-27.32	0	48.69	-	-	74	-25.31	162	210	V
			* 1.440029	39.02	ADR	28.5	-27.33	0.61	40.8	54	-13.2	-	-	162	210	V
			5.248638	33.77	ADR	34.4	-24.33	0.61	44.45	68.2	-23.75	-	-	258	380	H
			5.250326	33.73	ADR	34.4	-24.28	0.61	44.46	68.2	-23.74	-	-	302	301	V
			5.253197	44.88	PK-U	34.4	-24.29	0	54.99	-	-	88.2	-33.21	302	301	V
			5.265651	45.51	PK-U	34.4	-24.22	0	55.69	-	-	88.2	-32.51	258	380	H
12.872747			44.34	ADR	39	-43.99	0.61	39.96	68.2	-28.24	-	-	57	333	H	
12.880445			55.84	PK-U	39	-43.98	0	50.86	-	-	88.2	-37.34	57	333	H	
11be (Partial RU Mode / Highest PSD)	6665 (26T)	6 + 5	12.887529	56.03	PK-U	39	-43.97	0	51.06	-	-	88.2	-37.14	222	249	V
			12.899832	44.38	ADR	39	-43.89	0.61	40.1	68.2	-28.1	-	-	222	249	V
			2.053676	60.99	PK-U	32	-50.03	0	42.96	-	-	88.2	-45.24	330	373	H
			2.049179	49.48	ADR	32	-49.98	0	31.5	68.2	-36.7	-	-	330	373	H
			* 3.639676	58.33	PK-U	33.3	-47.71	0	43.92	-	-	74	-30.08	151	382	H
			* 3.644609	46.42	ADR	33.3	-47.66	0	32.06	54	-21.94	-	-	151	382	H
			2.05282	61.14	PK-U	32	-50.03	0	43.11	-	-	88.2	-45.09	244	390	V
			2.051003	49.53	ADR	32	-49.99	0	31.54	68.2	-36.66	-	-	244	390	V
			* 3.640274	58.25	PK-U	33.3	-47.7	0	43.85	-	-	74	-30.15	13	158	V
			* 3.64174	46.37	ADR	33.3	-47.7	0	31.97	54	-22.03	-	-	13	158	V
	6825 (Straddle) (26T)	6 + 5	12.713215	54.97	PK-U	39.1	-42.85	0	51.22	-	-	88.2	-36.98	16	380	H
			* 12.686357	42.99	ADR	39	-43.49	0	38.5	54	-15.5	-	-	16	380	H
			12.708903	54.77	PK-U	39.1	-42.96	0	50.91	-	-	88.2	-37.29	284	350	V
			* 12.698944	43.17	ADR	39	-43.26	0	38.91	54	-15.09	-	-	284	350	V
			1.994473	61.69	PK-U	32	-49.81	0	43.88	-	-	88.2	-44.32	360	101	H
			1.996824	49.82	ADR	32.1	-49.81	0	32.11	68.2	-36.09	-	-	360	101	H
			3.158336	58.03	PK-U	33.5	-47.85	0	43.68	-	-	88.2	-44.52	360	101	H
			3.16018	46.37	ADR	33.5	-47.88	0	31.99	68.2	-36.21	-	-	360	101	H
			1.993096	61.55	PK-U	32	-49.81	0	43.74	-	-	88.2	-44.46	360	101	V
			2.000131	49.93	ADR	32.1	-49.8	0	32.23	68.2	-35.97	-	-	360	101	V
			3.170172	58.15	PK-U	33.4	-47.94	0	43.61	-	-	88.2	-44.59	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6665MHz)

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44015	47.66	PK-U	28.5	-27.33	0	48.83	-	-	74	-25.17	187	297	H
1	* 1.440073	38.79	ADR	28.5	-27.33	0.61	40.57	54	-13.43	-	-	187	297	H
2	* 1.439519	45.93	PK-U	28.5	-27.33	0	47.1	-	-	74	-26.9	22	381	V
2	* 1.440122	34.94	ADR	28.5	-27.33	0.61	36.72	54	-17.28	-	-	22	381	V
4	4.45908	35.09	ADR	33.8	-25.07	0.61	44.43	68.2	-23.77	-	-	1	201	V
4	4.472245	46.43	PK-U	33.8	-24.98	0	55.25	-	-	88.2	-32.95	1	201	V
3	4.472302	35.02	ADR	33.8	-24.98	0.61	44.45	68.2	-23.75	-	-	104	149	H
3	4.489518	47.26	PK-U	33.9	-24.79	0	56.37	-	-	88.2	-31.83	104	149	H
5	14.792519	56.65	PK-U	39.8	-44.14	0	52.31	-	-	88.2	-35.89	311	102	H
5	14.813352	45.05	ADR	39.8	-44.11	0.61	41.35	68.2	-26.85	-	-	311	102	H
6	14.833685	44.99	ADR	39.8	-44.25	0.61	41.15	68.2	-27.05	-	-	258	140	V
6	14.837828	57.11	PK-U	39.8	-44.17	0	52.74	-	-	88.2	-35.46	258	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

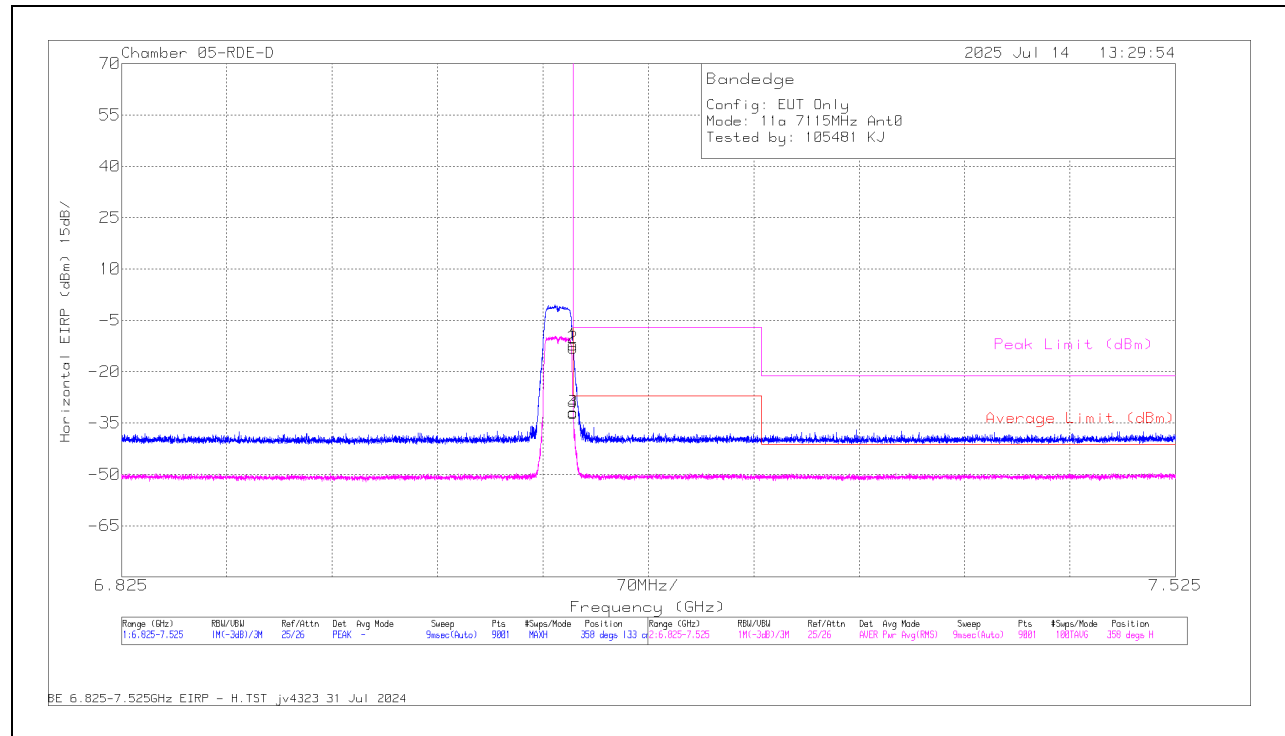
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-22.06	Pk	35.6	11.8	0	-37.44	-12.1	-	-	-7	-5.1	358	133	H
			7.125	-42.26	RMS	35.6	11.8	0	-37.44	-32.3	-27	-5.3	-	-	358	133	H
			7.125068	-22.97	Pk	35.6	11.8	0	-37.44	-13.01	-	-	-7	-6.01	358	133	H
			7.125068	-42.58	RMS	35.6	11.8	0	-37.44	-32.62	-27	-5.62	-	-	358	133	H
			7.125	-35.53	Pk	35.6	11.8	0	-37.44	-25.57	-	-	-7	-18.57	340	102	V
			7.125	-52.83	RMS	35.6	11.8	0	-37.44	-42.87	-27	-15.87	-	-	340	102	V
		5	7.408179	-47.25	Pk	35.6	11.8	0	-37.77	-37.62	-	-	-21.2	-16.42	340	102	V
			7.497469	-59.4	RMS	35.6	11.8	0	-37.54	-49.54	-41.2	-8.34	-	-	340	102	V
			7.125	-24.13	Pk	35.6	11.8	0	-35.2	-11.93	-	-	-7	-4.93	111	200	H
			7.125	-43.17	RMS	35.6	11.8	0	-35.2	-30.97	-27	-3.97	-	-	111	200	H
			7.125068	-24.83	Pk	35.6	11.8	0	-35.2	-12.63	-	-	-7	-5.63	111	200	H
			7.125068	-42.48	RMS	35.6	11.8	0	-35.2	-30.28	-27	-3.28	-	-	111	200	H
			7.125	-24.17	Pk	35.6	11.8	0	-35.2	-11.97	-	-	-7	-4.97	156	128	V
			7.125	-42.47	RMS	35.6	11.8	0	-35.2	-30.27	-27	-3.27	-	-	156	128	V
			7.125068	-24.21	Pk	35.6	11.8	0	-35.2	-12.01	-	-	-7	-5.01	156	128	V
			7.125068	-42.82	RMS	35.6	11.8	0	-35.2	-30.62	-27	-3.62	-	-	156	128	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

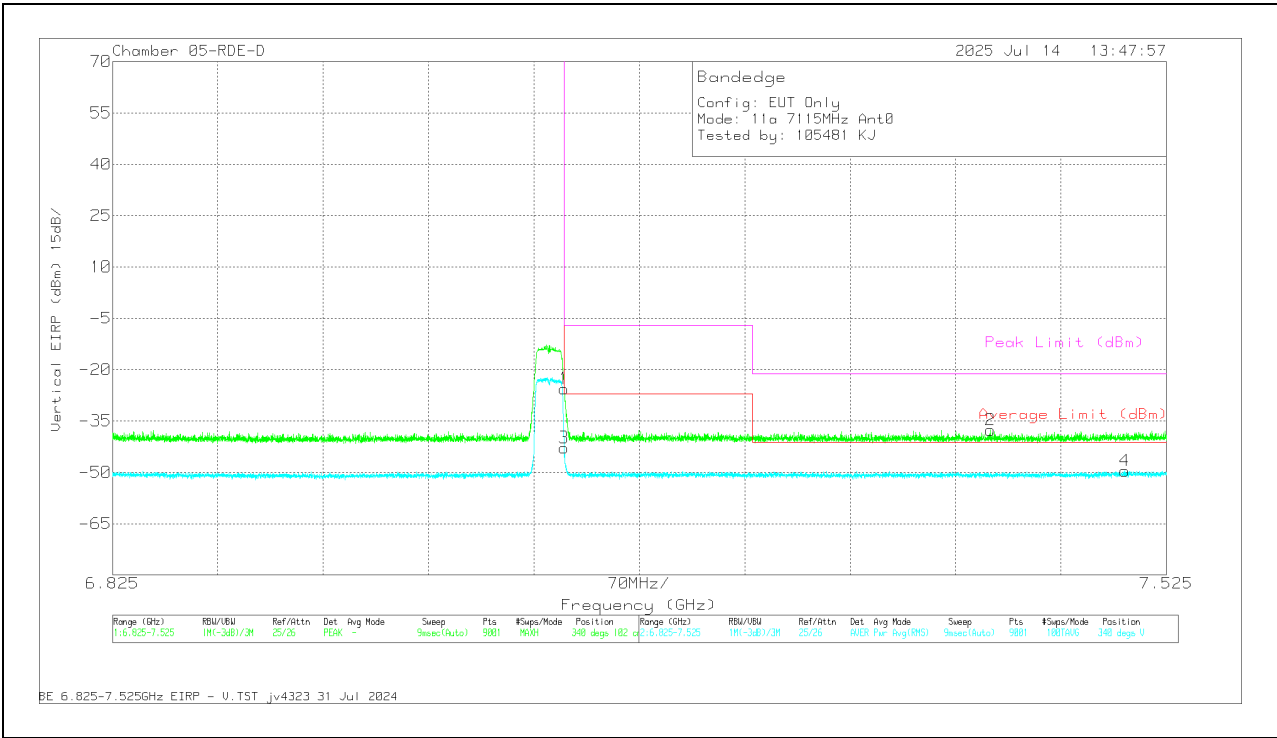
1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.06	Pk	35.6	11.8	0	-37.44	-12.1	-	-	-7	-5.1	358	133	H
3	7.125	-42.26	RMS	35.6	11.8	0	-37.44	-32.3	-27	-5.3	-	-	358	133	H
2	7.125068	-22.97	Pk	35.6	11.8	0	-37.44	-13.01	-	-	-7	-6.01	358	133	H
4	7.125068	-42.58	RMS	35.6	11.8	0	-37.44	-32.62	-27	-5.62	-	-	358	133	H

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-35.53	Pk	35.6	11.8	0	-37.44	-25.57	-	-	-7	-18.57	340	102	V
3	7.125	-52.83	RMS	35.6	11.8	0	-37.44	-42.87	-27	-15.87	-	-	340	102	V
2	7.408179	-47.25	Pk	35.6	11.8	0	-37.77	-37.62	-	-	-21.2	-16.42	340	102	V
4	7.497469	-59.4	RMS	35.6	11.8	0	-37.54	-49.54	-41.2	-8.34	-	-	340	102	V

Pk - Peak detector
RMS - RMS detection

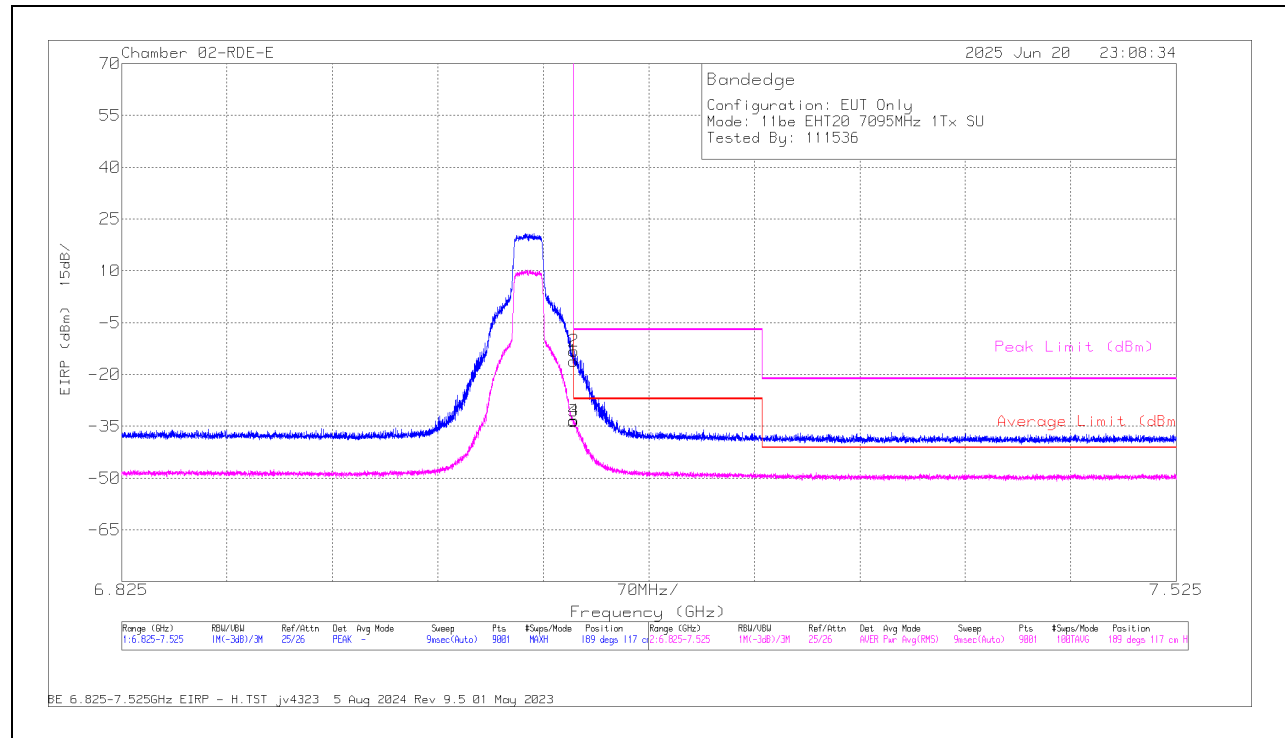
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-28.32	Pk	35.8	11.8	0	-35.42	-16.14	-	-	-7	-9.14	189	117	H
			7.125	-45.91	RMS	35.8	11.8	0.84	-35.42	-32.89	-27	-5.89	-	-	189	117	H
			7.125223	-45.67	RMS	35.8	11.8	0.84	-35.43	-32.66	-27	-5.66	-	-	189	117	H
			7.125301	-25.36	Pk	35.8	11.8	0	-35.44	-13.2	-	-	-7	-6.2	189	117	H
			* 7.401179	-47.78	Pk	35.7	11.8	0	-36.31	-36.59	-	-	-21.2	-15.39	84	101	V
			* 7.489691	-59.83	RMS	35.8	11.8	0.84	-36.31	-47.7	-41.2	-6.5	-	-	84	101	V
		5	7.125	-42.78	Pk	35.8	11.8	0	-35.42	-30.6	-	-	-7	-23.6	84	101	V
			7.125	-58.86	RMS	35.8	11.8	0.84	-35.42	-45.84	-27	-18.84	-	-	84	101	V
			* 7.52046	-47.94	Pk	35.6	11.8	0	-36.3	-36.84	-	-	-21.2	-15.64	86	111	H
			* 7.499491	-59.92	RMS	35.6	11.8	0.84	-36.45	-48.13	-41.2	-6.93	-	-	86	111	H
			7.125	-48.75	Pk	35.5	11.8	0	-36.5	-37.95	-	-	-7	-30.95	86	111	H
			7.125	-61.23	RMS	35.5	11.8	0.84	-36.5	-49.59	-27	-22.59	-	-	86	111	H
			* 7.260635	-48.02	Pk	35.5	11.8	0	-36.5	-37.22	-	-	-21.2	-16.02	152	147	V
			* 7.524769	-60.09	RMS	35.6	11.8	0.84	-36.3	-48.15	-41.2	-6.95	-	-	152	147	V
			7.125	-47.13	Pk	35.5	11.8	0	-36.5	-36.33	-	-	-7	-29.33	152	147	V
			7.125	-60.07	RMS	35.5	11.8	0.84	-36.5	-48.43	-27	-21.43	-	-	152	147	V
EHT40 (SU Mode)	7085	6	7.125	-26.32	Pk	35.8	11.8	0	-35.42	-14.14	-	-	-7	-7.14	10	108	H
			7.125	-43.14	RMS	35.8	11.8	0.97	-35.42	-29.99	-27	-2.99	-	-	10	108	H
			7.125068	-26.17	Pk	35.8	11.8	0	-35.42	-13.99	-	-	-7	-6.99	10	108	H
			7.125379	-42.86	RMS	35.8	11.8	0.97	-35.44	-29.73	-27	-2.73	-	-	10	108	H
			* 7.284279	-47.92	Pk	35.6	11.8	0	-35.91	-36.43	-	-	-21.2	-15.23	10	108	V
			* 7.480202	-59.66	RMS	35.8	11.8	0.97	-36.45	-47.54	-41.2	-6.34	-	-	10	108	V
		5	7.125	-42.5	Pk	35.8	11.8	0	-35.42	-30.32	-	-	-7	-23.32	10	108	V
			7.125	-59.26	RMS	35.8	11.8	0.97	-35.42	-46.11	-27	-19.11	-	-	10	108	V
			7.125	-36.66	Pk	35.7	11.8	0	-36.51	-25.67	-	-	-7	-18.67	352	130	H
			7.125	-52.34	RMS	35.7	11.8	0.97	-36.51	-40.38	-27	-13.38	-	-	352	130	H
			* 7.437346	-46.47	Pk	35.7	11.8	0	-37.34	-36.31	-	-	-21.2	-15.11	352	130	H
			* 7.519558	-59	RMS	35.7	11.8	0.97	-36.9	-47.43	-41.2	-6.23	-	-	352	130	H
			7.125	-36.05	Pk	35.7	11.8	0	-36.51	-25.06	-	-	-7	-18.06	38	119	V
			7.125	-53.13	RMS	35.7	11.8	0.97	-36.51	-41.17	-27	-14.17	-	-	38	119	V
			* 7.378468	-45.96	Pk	35.6	11.8	0	-36.86	-35.42	-	-	-21.2	-14.22	38	119	V
			* 7.522513	-58.71	RMS	35.7	11.8	0.97	-36.97	-47.21	-41.2	-6.01	-	-	38	119	V
EHT80 (SU Mode)	7025	6	7.125	-29.52	Pk	35.8	11.8	0	-35.42	-17.34	-	-	-7	-10.34	142	121	H
			7.125	-44.81	RMS	35.8	11.8	1.07	-35.42	-31.56	-27	-4.56	-	-	142	121	H
			7.125456	-44.2	RMS	35.8	11.8	1.07	-35.45	-30.98	-27	-3.98	-	-	142	121	H
			7.126312	-27.77	Pk	35.8	11.8	0	-35.48	-15.65	-	-	-7	-8.65	142	121	H
			* 7.344324	-47.16	Pk	35.6	11.8	0	-36.18	-35.94	-	-	-21.2	-14.74	155	113	V
			* 7.284124	-59.99	RMS	35.6	11.8	1.07	-35.9	-47.42	-41.2	-6.22	-	-	155	113	V
		5	7.125	-40.48	Pk	35.8	11.8	0	-35.42	-28.3	-	-	-7	-21.3	155	113	V
			7.125	-55.09	RMS	35.8	11.8	1.07	-35.42	-41.84	-27	-14.84	-	-	155	113	V
			* 7.498869	-61.55	Pk	35.7	11.8	0	-22.02	-36.07	-	-	-21.2	-14.87	356	122	H
			* 7.52088	-73.65	RMS	35.7	11.8	1.07	-22.02	-47.1	-41.2	-5.9	-	-	356	122	H
			7.125	-62.14	Pk	35.7	11.8	0	-22.68	-37.32	-	-	-7	-30.32	356	122	H
			7.125	-73.6	RMS	35.7	11.8	1.07	-22.68	-47.71	-27	-20.71	-	-	356	122	H
			* 7.485102	-61.38	Pk	35.7	11.8	0	-21.98	-35.86	-	-	-21.2	-14.66	38	254	V
			* 7.513024	-73.41	RMS	35.7	11.8	1.07	-22.03	-46.87	-41.2	-5.67	-	-	38	254	V
			7.125	-62.7	Pk	35.7	11.8	0	-22.68	-37.88	-	-	-7	-30.88	38	254	V
			7.125	-73.62	RMS	35.7	11.8	1.07	-22.68	-47.73	-27	-20.73	-	-	38	254	V
EHT160 (SU Mode)	6985	6	7.125	-30.3	Pk	35.6	11.8	0	-37.18	-20.08	-	-	-7	-13.08	356	137	H
			7.125	-43.65	RMS	35.6	11.8	1.16	-37.18	-32.27	-27	-5.27	-	-	356	137	H
			7.128879	-41.13	RMS	35.6	11.8	1.16	-37.2	-29.77	-27	-2.77	-	-	356	137	H
			7.141634	-24.61	Pk	35.6	11.8	0	-37.2	-14.41	-	-	-7	-7.41	356	137	H
			7.125	-45.44	Pk	35.6	11.8	0	-37.18	-35.22	-	-	-7	-28.22	337	151	V
			7.125	-58.88	RMS	35.6	11.8	1.16	-37.18	-47.5	-27	-20.5	-	-	337	151	V
		5	7.483702	-59.34	RMS	35.6	11.8	1.16	-37.41	-48.19	-41.2	-6.99	-	-	337	151	V
			7.523369	-46.93	Pk	35.6	11.8	0	-37.37	-36.9	-	-	-21.2	-15.7	337	151	V
			7.125	-45.45	Pk	35.6	11.8	0	-35.24	-33.29	-	-	-7	-26.29	277	180	H
			* 7.394646	-48.12	Pk	35.6	11.8	0	-35.26	-35.98	-	-	-21.2	-14.78	277	180	H
			7.125	-60.38	RMS	35.6	11.8	1.16	-35.24	-47.06	-27	-20.06	-	-	277	180	H
			* 7.294001	-60.71	RMS	35.6	11.8	1.16	-35.05	-47.2	-41.2	-6	-	-	277	180	H
			7.125	-44.83	Pk	35.6	11.8	0	-35.24	-32.67	-	-	-7	-25.67	343	250	V
			* 7.252157	-48.71	Pk	35.6	11.8	0	-34.9	-36.21	-	-	-21.2	-15.01	343	250	V
			7.125	-60.38	RMS	35.6	11.8	1.16	-35.24	-47.06	-27	-20.06	-	-	343	250	V
			* 7.259312	-60.57	RMS	35.6	11.8	1.16	-34.93	-46.94	-41.2	-5.74	-	-	343	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

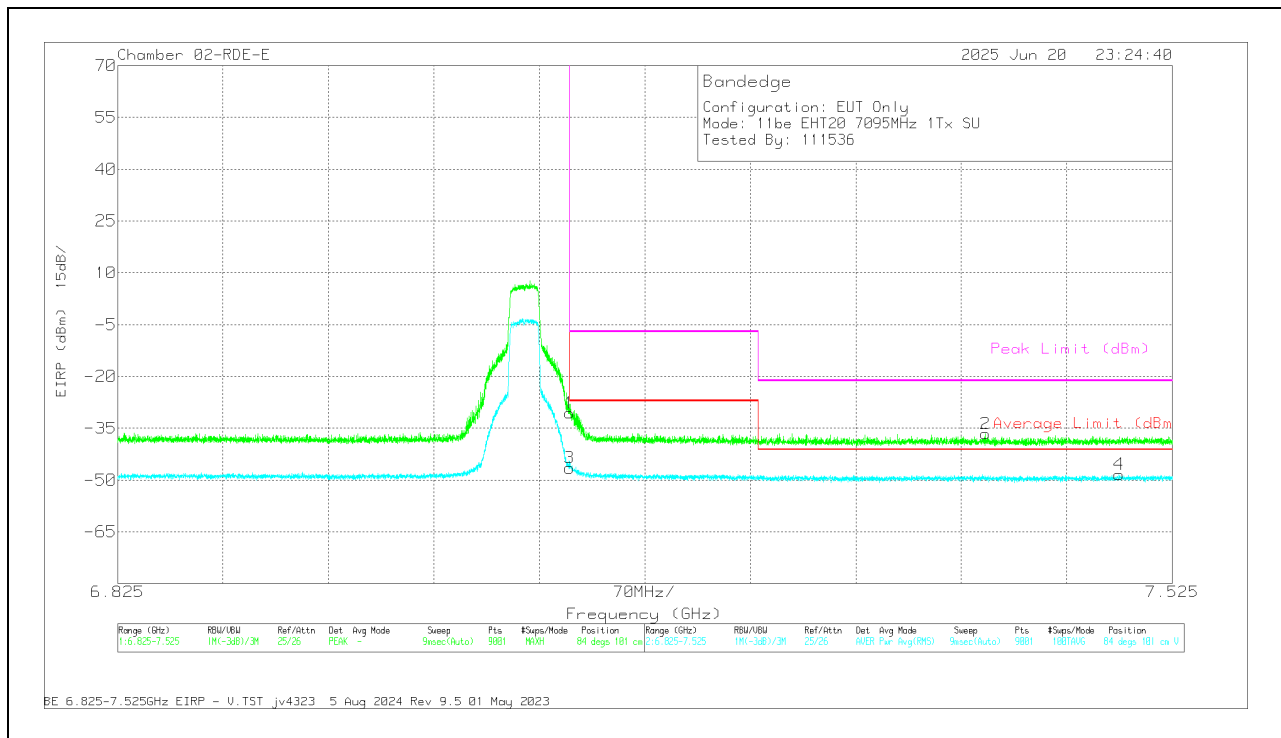
1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.32	Pk	35.8	11.8	0	-35.42	-16.14	-	-	-7	-9.14	189	117	H
3	7.125	-45.91	RMS	35.8	11.8	0.84	-35.42	-32.89	-27	-5.89	-	-	189	117	H
4	7.125223	-45.67	RMS	35.8	11.8	0.84	-35.43	-32.66	-27	-5.66	-	-	189	117	H
2	7.125301	-25.36	Pk	35.8	11.8	0	-35.44	-13.2	-	-	-7	-6.2	189	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.401179	-47.78	Pk	35.7	11.8	0	-36.31	-36.59	-	-	-21.2	-15.39	84	101	V
4	* 7.489691	-59.83	RMS	35.8	11.8	0.84	-36.31	-47.7	-41.2	-6.5	-	-	84	101	V
1	7.125	-42.78	Pk	35.8	11.8	0	-35.42	-30.6	-	-	-7	-23.6	84	101	V
3	7.125	-58.86	RMS	35.8	11.8	0.84	-35.42	-45.84	-27	-18.84	-	-	84	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

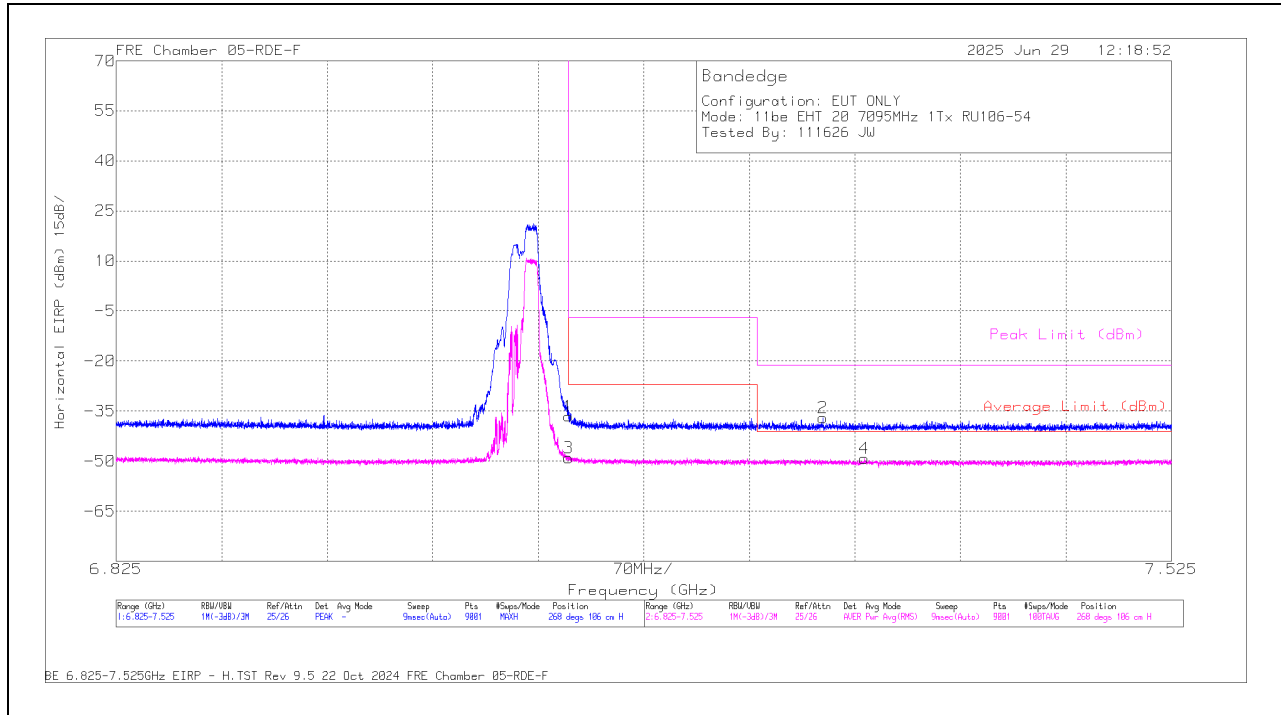
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6	7.125	-46.92	Pk	35.7	11.8	0	-37.13	-36.55	-	-	-7	-29.55	268	106	H
			* 7.293924	-47.56	Pk	35.7	11.8	0	-36.96	-37.02	-	-	-21.2	-15.82	268	106	H
			7.125	-59.54	RMS	35.7	11.8	0.1	-37.13	-49.07	-27	-22.07	-	-	268	106	H
			* 7.321457	-59.92	RMS	35.7	11.8	0.1	-36.94	-49.26	-41.2	-8.06	-	-	268	106	H
			7.125	-49.79	Pk	35.7	11.8	0	-37.13	-39.42	-	-	-7	-32.42	280	111	V
			* 7.399391	-47.86	Pk	35.6	11.8	0	-37.05	-37.51	-	-	-21.2	-16.31	280	111	V
		5	7.125	-61.27	RMS	35.7	11.8	0.1	-37.13	-50.8	-27	-23.8	-	-	280	111	V
			* 7.329701	-59.94	RMS	35.6	11.8	0.1	-36.97	-49.41	-41.2	-8.21	-	-	280	111	V
			* 7.251301	-48.11	Pk	35.6	11.8	0	-35.74	-36.45	-	-	-21.2	-15.25	330	124	H
			* 7.453524	-59.57	RMS	35.8	11.8	0.1	-36.51	-48.38	-41.2	-7.18	-	-	330	124	H
			7.125	-50.98	Pk	35.8	11.8	0	-35.42	-38.8	-	-	-7	-31.8	330	124	H
			7.125	-60.96	RMS	35.8	11.8	0.1	-35.42	-48.68	-27	-21.68	-	-	330	124	H
			* 7.395035	-47.45	Pk	35.7	11.8	0	-36.39	-36.34	-	-	-21.2	-15.14	15	181	V
			* 7.256668	-59.96	RMS	35.6	11.8	0.1	-35.89	-48.35	-41.2	-7.15	-	-	15	181	V
			7.125	-50.38	Pk	35.8	11.8	0	-35.42	-38.2	-	-	-7	-31.2	15	181	V
			7.125	-61.13	RMS	35.8	11.8	0.1	-35.42	-48.85	-27	-21.85	-	-	15	181	V
EHT40 (RU 106 / Index 56)	7085	6	7.125	-49.72	Pk	35.7	11.8	0	-36.51	-38.73	-	-	-7	-31.73	159	191	H
			7.125	-59.76	RMS	35.7	11.8	0	-36.51	-48.77	-27	-21.77	-	-	159	191	H
			* 7.252857	-59.28	RMS	35.6	11.8	0	-36.59	-48.47	-41.2	-7.27	-	-	159	191	H
			* 7.334524	-46.7	Pk	35.6	11.8	0	-36.95	-36.25	-	-	-21.2	-15.05	159	191	H
			7.125	-50.41	Pk	35.7	11.8	0	-36.51	-39.42	-	-	-7	-32.42	170	146	V
			7.125	-60.42	RMS	35.7	11.8	0	-36.51	-49.43	-27	-22.43	-	-	170	146	V
		5	* 7.414868	-47.04	Pk	35.6	11.8	0	-37.14	-36.78	-	-	-21.2	-15.58	170	146	V
			* 7.508902	-58.85	RMS	35.7	11.8	0	-37.15	-48.5	-41.2	-7.3	-	-	170	146	V
			* 7.260868	-47.62	Pk	35.6	11.8	0	-35.89	-36.11	-	-	-21.2	-14.91	325	107	H
			* 7.326824	-59.83	RMS	35.6	11.8	0	-36.11	-48.54	-41.2	-7.34	-	-	325	107	H
			7.125	-50.47	Pk	35.8	11.8	0	-35.42	-38.29	-	-	-7	-31.29	325	107	H
			7.125	-61.41	RMS	35.8	11.8	0	-35.42	-49.23	-27	-22.23	-	-	325	107	H
			* 7.303179	-47.53	Pk	35.6	11.8	0	-36.07	-36.2	-	-	-21.2	-15	10	203	V
			* 7.408879	-59.47	RMS	35.7	11.8	0	-36.44	-48.41	-41.2	-7.21	-	-	10	203	V
			7.125	-50.67	Pk	35.8	11.8	0	-35.42	-38.49	-	-	-7	-31.49	10	203	V
			7.125	-60.94	RMS	35.8	11.8	0	-35.42	-48.76	-27	-21.76	-	-	10	203	V
EHT80 (RU 484+242 / Index 93)	7025	6	7.125	-44.36	Pk	35.6	11.8	0	-37.18	-34.14	-	-	-7	-27.14	356	140	H
			7.125	-57.43	RMS	35.6	11.8	0	-37.18	-47.21	-27	-20.21	-	-	356	140	H
			* 7.491635	-47.04	Pk	35.6	11.8	0	-37.5	-37.14	-	-	-21.2	-15.94	356	140	H
			* 7.518235	-59.16	RMS	35.6	11.8	0	-37.38	-49.14	-41.2	-7.94	-	-	356	140	H
			7.125	-50.11	Pk	35.6	11.8	0	-37.18	-39.89	-	-	-7	-32.89	356	140	V
			7.125	-60.62	RMS	35.6	11.8	0	-37.18	-50.4	-27	-23.4	-	-	356	140	V
		5	* 7.36299	-59.06	RMS	35.6	11.8	0	-37.71	-49.37	-41.2	-8.17	-	-	356	140	V
			* 7.390991	-46.13	Pk	35.6	11.8	0	-37.61	-36.34	-	-	-21.2	-15.14	356	140	V
			7.125	-50.05	Pk	35.7	11.8	0	-36.34	-38.89	-	-	-7	-31.89	135	192	H
			7.125	-61.68	RMS	35.7	11.8	0	-36.34	-50.52	-27	-23.52	-	-	135	192	H
			* 7.269657	-59.94	RMS	35.7	11.8	0	-36.03	-48.47	-41.2	-7.27	-	-	135	192	H
			* 7.277668	-47.85	Pk	35.7	11.8	0	-36.13	-36.48	-	-	-21.2	-15.28	135	192	H
			7.125	-49.69	Pk	35.7	11.8	0	-36.34	-38.53	-	-	-7	-31.53	196	225	V
			7.125	-61.36	RMS	35.7	11.8	0	-36.34	-50.2	-27	-23.2	-	-	196	225	V
			* 7.252935	-60.2	RMS	35.7	11.8	0	-36.09	-48.79	-41.2	-7.59	-	-	196	225	V
			* 7.255423	-47.99	Pk	35.7	11.8	0	-36.11	-36.6	-	-	-21.2	-15.4	196	225	V
EHT160 (RU 484+242 / Index 93)	6985	6	* 7468.224	-47.23	Pk	35.5	11.8	0	-34.4	-34.33	-	-	-21.2	-13.13	354	112	H
			* 7471.88	-60.17	RMS	35.4	11.8	0	-34.25	-47.22	-41.2	-6.02	-	-	354	112	H
			7125	-48.36	Pk	35.5	11.8	0	-34.6	-35.66	-	-	-7	-28.66	354	112	H
			7125	-60.72	RMS	35.5	11.8	0	-34.6	-48.02	-27	-21.02	-	-	354	112	H
			* 7379.09	-47.78	Pk	35.4	11.8	0	-34.66	-35.24	-	-	-21.2	-14.04	54	124	V
			* 7471.18	-59.92	RMS	35.4	11.8	0	-34.27	-46.99	-41.2	-5.79	-	-	54	124	V
		5	7125	-50.24	Pk	35.5	11.8	0	-34.6	-37.54	-	-	-7	-30.54	54	124	V
			7125	-61.82	RMS	35.5	11.8	0	-34.6	-49.12	-27	-22.12	-	-	54	124	V
			7.125	-50.22	Pk	35.7	11.8	0	-35.85	-38.57	-	-	-7	-31.57	287	199	H
			7.125	-60.42	RMS	35.7	11.8	0	-35.85	-48.77	-27	-21.77	-	-	287	199	H
			* 7.308468	-47.58	Pk	35.7	11.8	0	-36.27	-36.35	-	-	-21.2	-15.15	287	199	H
			* 7.345879	-59.39	RMS	35.7	11.8	0	-36.43	-48.32	-41.2	-7.12	-	-	287	199	H
			7.125	-49.59	Pk	35.7	11.8	0	-35.85	-37.94	-	-	-7	-30.94	312	175	V
			7.125	-60.68	RMS	35.7	11.8	0	-35.85	-49.03	-27	-22.03	-	-	312	175	V
			* 7.338724	-47.7	Pk	35.7	11.8	0	-36.25	-36.45	-	-	-21.2	-15.25	312	175	V
			* 7.467835	-59.21	RMS	35.7	11.8	0	-36.48	-48.19	-41.2	-6.99	-	-	312	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

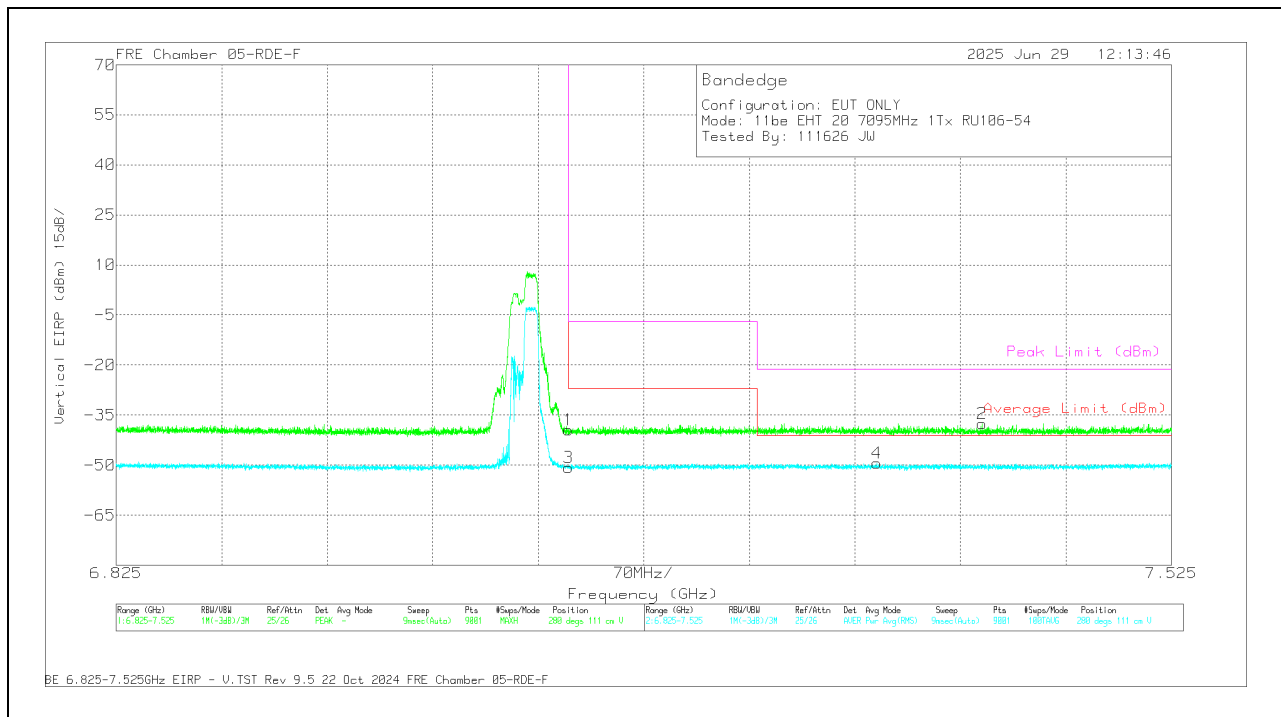
1TX Antenna 6 MODE: 106-Tone, RU Index 54**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-46.92	Pk	35.7	11.8	0	-37.13	-36.55	-	-	-7	-29.55	268	106	H
2	* 7.293924	-47.56	Pk	35.7	11.8	0	-36.96	-37.02	-	-	-21.2	-15.82	268	106	H
3	7.125	-59.54	RMS	35.7	11.8	0.1	-37.13	-49.07	-27	-22.07	-	-	268	106	H
4	* 7.321457	-59.92	RMS	35.7	11.8	0.1	-36.94	-49.26	-41.2	-8.06	-	-	268	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-49.79	Pk	35.7	11.8	0	-37.13	-39.42	-	-	-7	-32.42	280	111	V
2	* 7.399391	-47.86	Pk	35.6	11.8	0	-37.05	-37.51	-	-	-21.2	-16.31	280	111	V
3	7.125	-61.27	RMS	35.7	11.8	0.1	-37.13	-50.8	-27	-23.8	-	-	280	111	V
4	* 7.329701	-59.94	RMS	35.6	11.8	0.1	-36.97	-49.41	-41.2	-8.21	-	-	280	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

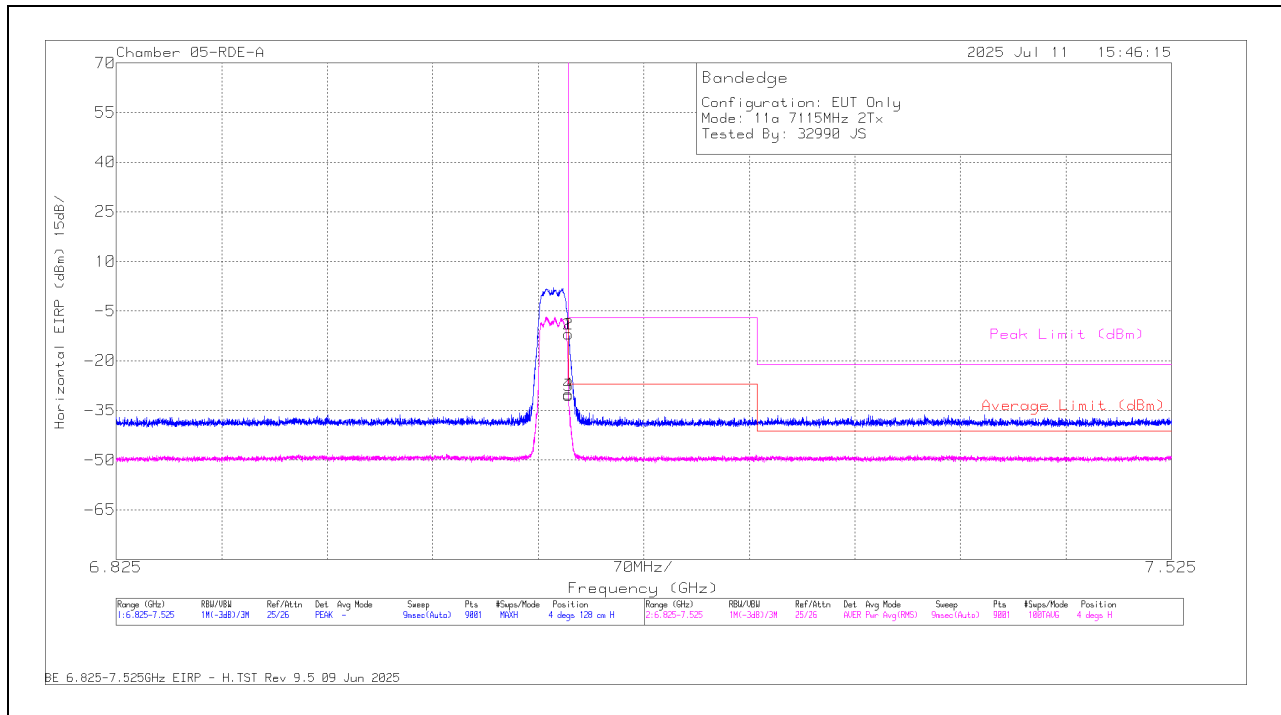
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-23.82	Pk	35.8	11.8	0	-35.7	-11.92	-	-	-7	-4.92	4	128	H
			7.125	-42.4	RMS	35.8	11.8	0	-35.7	-30.5	-27	-3.5	-	-	4	128	H
			7.125068	-23.9	Pk	35.8	11.8	0	-35.7	-12	-	-	-7	-5	4	128	H
			7.125068	-41.96	RMS	35.8	11.8	0	-35.7	-30.06	-27	-3.06	-	-	4	128	H
			* 7.367268	-60.58	RMS	35.8	11.8	0	-35.53	-48.51	-41.2	-7.31	-	-	340	127	V
			7.125	-34.06	Pk	35.8	11.8	0	-35.7	-22.16	-	-	-7	-15.16	340	127	V
			7.125	-51.52	RMS	35.8	11.8	0	-35.7	-39.62	-27	-12.62	-	-	340	127	V
			7.125068	-33.36	Pk	35.8	11.8	0	-35.7	-21.46	-	-	-7	-14.46	340	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

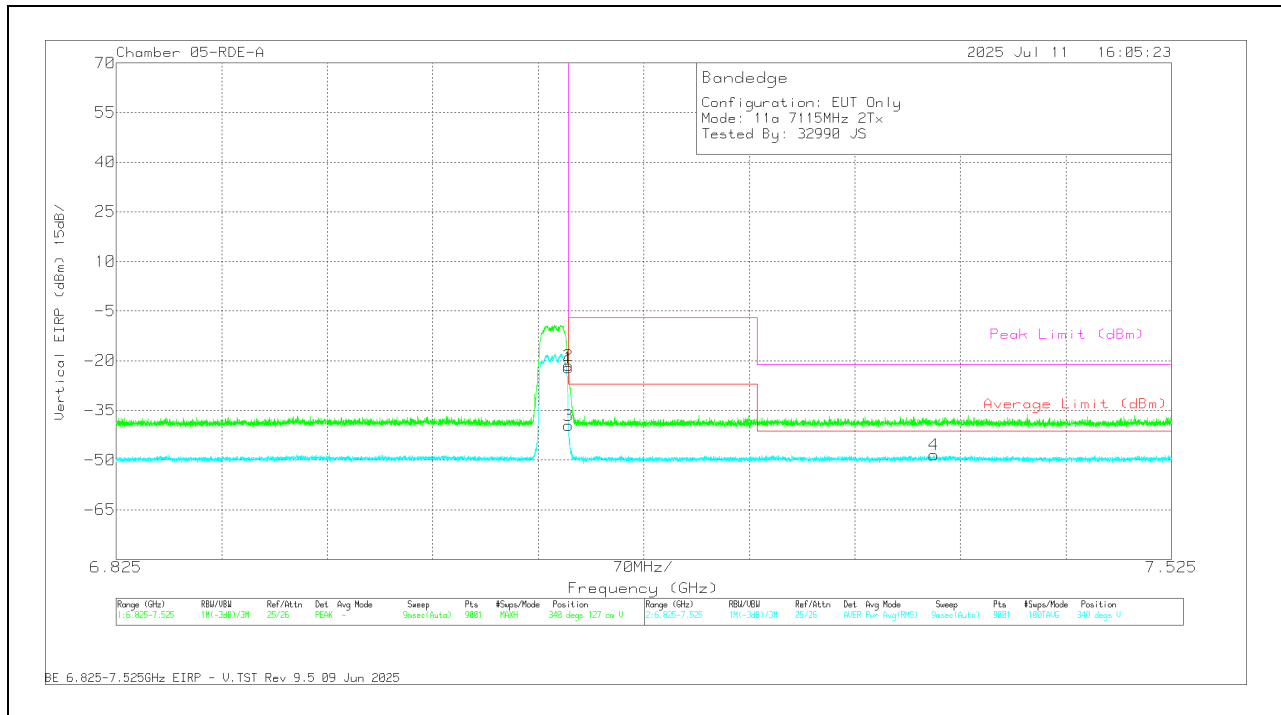
2TX Antenna 6+5 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226671 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-23.82	Pk	35.8	11.8	0	-35.7	-11.92	-	-	-7	-4.92	4	128	H
3	7.125	-42.4	RMS	35.8	11.8	0	-35.7	-30.5	-27	-3.5	-	-	4	128	H
2	7.125068	-23.9	Pk	35.8	11.8	0	-35.7	-12	-	-	-7	-5	4	128	H
4	7.125068	-41.96	RMS	35.8	11.8	0	-35.7	-30.06	-27	-3.06	-	-	4	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226671 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 7.367268	-60.58	RMS	35.8	11.8	0	-35.53	-48.51	-41.2	-7.31	-	-	340	127	V
1	7.125	-34.06	Pk	35.8	11.8	0	-35.7	-22.16	-	-	-7	-15.16	340	127	V
3	7.125	-51.52	RMS	35.8	11.8	0	-35.7	-39.62	-27	-12.62	-	-	340	127	V
2	7.125068	-33.36	Pk	35.8	11.8	0	-35.7	-21.46	-	-	-7	-14.46	340	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-27.16	Pk	35.8	11.8	0	-35.42	-14.98	-	-	-7	-7.98	153	104	H
			7.125	-44.06	RMS	35.8	11.8	0.84	-35.42	-31.04	-27	-4.04	-	-	153	104	H
			7.125068	-43.55	RMS	35.8	11.8	0.84	-35.42	-30.53	-27	-3.53	-	-	153	104	H
			7.125223	-24.26	Pk	35.8	11.8	0	-35.43	-12.09	-	-	-7	-5.09	153	104	H
			* 7.366957	-47.4	Pk	35.7	11.8	0	-36.26	-36.16	-	-	-21.2	-14.96	166	116	V
			* 7.455235	-59.72	RMS	35.8	11.8	0.84	-36.46	-47.74	-41.2	-6.54	-	-	166	116	V
			7.125	-38.06	Pk	35.8	11.8	0	-35.42	-25.88	-	-	-7	-18.88	166	116	V
			7.125	-56.29	RMS	35.8	11.8	0.84	-35.42	-43.27	-27	-16.27	-	-	166	116	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-26.94	Pk	35.6	11.8	0	-37.18	-16.72	-	-	-7	-9.72	360	114	H
			7.125	-41.78	RMS	35.6	11.8	0.97	-37.18	-30.59	-27	-3.59	-	-	360	114	H
			7.125534	-40.68	RMS	35.6	11.8	0.97	-37.17	-29.48	-27	-2.48	-	-	360	114	H
			7.126001	-25.14	Pk	35.6	11.8	0	-37.16	-14.9	-	-	-7	-7.9	360	114	H
			7.125	-37.96	Pk	35.6	11.8	0	-37.18	-27.74	-	-	-7	-20.74	349	135	V
			7.125	-55.71	RMS	35.6	11.8	0.97	-37.18	-44.52	-27	-17.52	-	-	349	135	V
			7.291124	-47.2	Pk	35.6	11.8	0	-37.62	-37.42	-	-	-21.2	-16.22	349	135	V
			7.519713	-58.98	RMS	35.6	11.8	0.97	-37.41	-48.02	-41.2	-6.82	-	-	349	135	V
EHT80 (SU Mode)	7025	6 + 5	7.125	-28.82	Pk	35.8	11.8	0	-35.42	-16.64	-	-	-7	-9.64	185	140	H
			7.125	-43.59	RMS	35.8	11.8	1.07	-35.42	-30.34	-27	-3.34	-	-	185	140	H
			7.125301	-26	Pk	35.8	11.8	0	-35.44	-13.84	-	-	-7	-6.84	185	140	H
			7.126156	-43.21	RMS	35.8	11.8	1.07	-35.48	-30.02	-27	-3.02	-	-	185	140	H
			* 7.468069	-47.3	Pk	35.8	11.8	0	-36.51	-36.21	-	-	-21.2	-15.01	178	188	V
			* 7.25519	-60.12	RMS	35.6	11.8	1.07	-35.85	-47.5	-41.2	-6.3	-	-	178	188	V
			7.125	-45.81	Pk	35.8	11.8	0	-35.42	-33.63	-	-	-7	-26.63	178	188	V
			7.125	-58.89	RMS	35.8	11.8	1.07	-35.42	-45.64	-27	-18.64	-	-	178	188	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-29.47	Pk	35.6	11.8	0	-37.18	-19.25	-	-	-7	-12.25	355	109	H
			7.125	-43.38	RMS	35.6	11.8	1.16	-37.18	-32	-27	-5	-	-	355	109	H
			7.135723	-41.2	RMS	35.6	11.8	1.16	-37.14	-29.78	-27	-2.78	-	-	355	109	H
			7.141479	-24.44	Pk	35.6	11.8	0	-37.2	-14.24	-	-	-7	-7.24	355	109	H
			7.125	-43.92	Pk	35.6	11.8	0	-37.18	-33.7	-	-	-7	-26.7	245	113	V
			7.125	-57.62	RMS	35.6	11.8	1.16	-37.18	-46.24	-27	-19.24	-	-	245	113	V
			7.414557	-47.08	Pk	35.6	11.8	0	-37.61	-37.29	-	-	-21.2	-16.09	245	113	V
			7.485335	-59.47	RMS	35.6	11.8	1.16	-37.43	-48.34	-41.2	-7.14	-	-	245	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

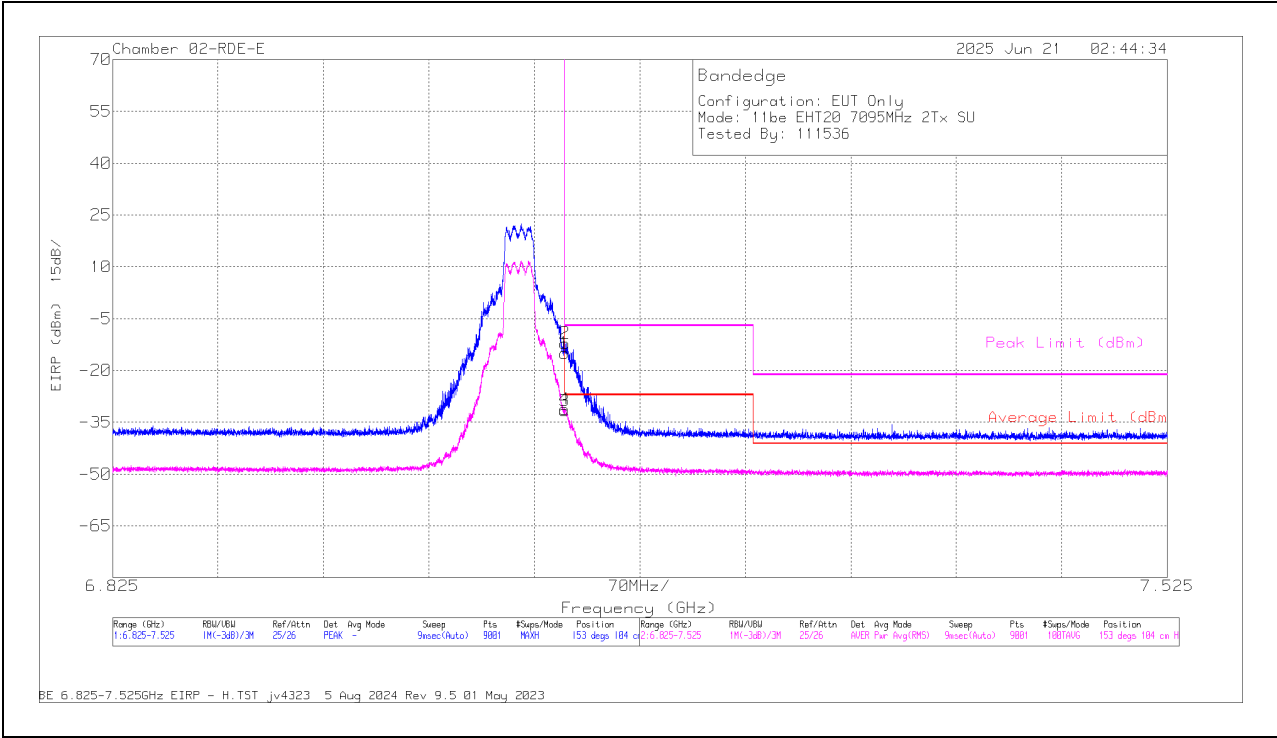
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU

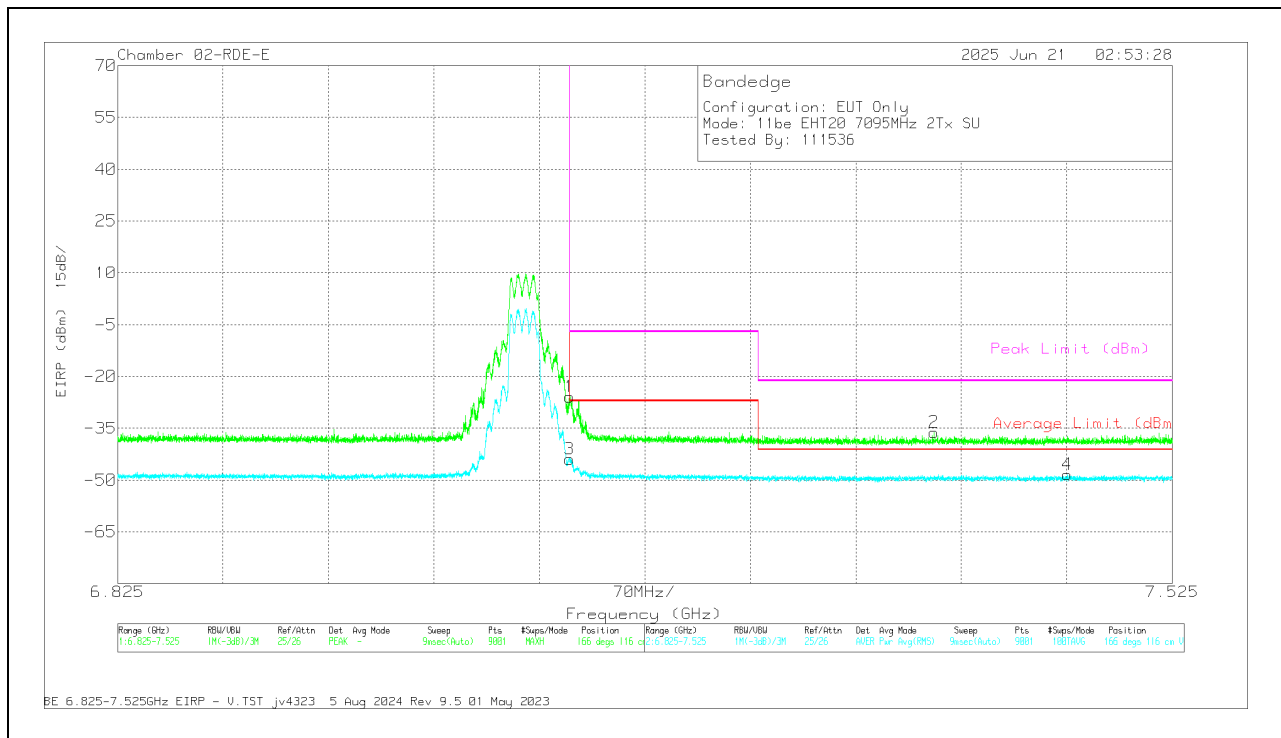
BANDEDGE (HIGH CHANNEL / 7095MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-27.16	Pk	35.8	11.8	0	-35.42	-14.98	-	-	-7	-7.98	153	104	H
3	7.125	-44.06	RMS	35.8	11.8	0	-35.42	-31.88	-27	-4.88	-	-	153	104	H
4	7.125068	-43.55	RMS	35.8	11.8	0	-35.42	-31.37	-27	-4.37	-	-	153	104	H
2	7.125223	-24.26	Pk	35.8	11.8	0	-35.43	-12.09	-	-	-7	-5.09	153	104	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.366957	-47.4	Pk	35.7	11.8	0	-36.26	-36.16	-	-	-21.2	-14.96	166	116	V
4	* 7.455235	-59.72	RMS	35.8	11.8	0	-36.46	-48.58	-41.2	-7.38	-	-	166	116	V
1	7.125	-38.06	Pk	35.8	11.8	0	-35.42	-25.88	-	-	-7	-18.88	166	116	V
3	7.125	-56.29	RMS	35.8	11.8	0	-35.42	-44.11	-27	-17.11	-	-	166	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

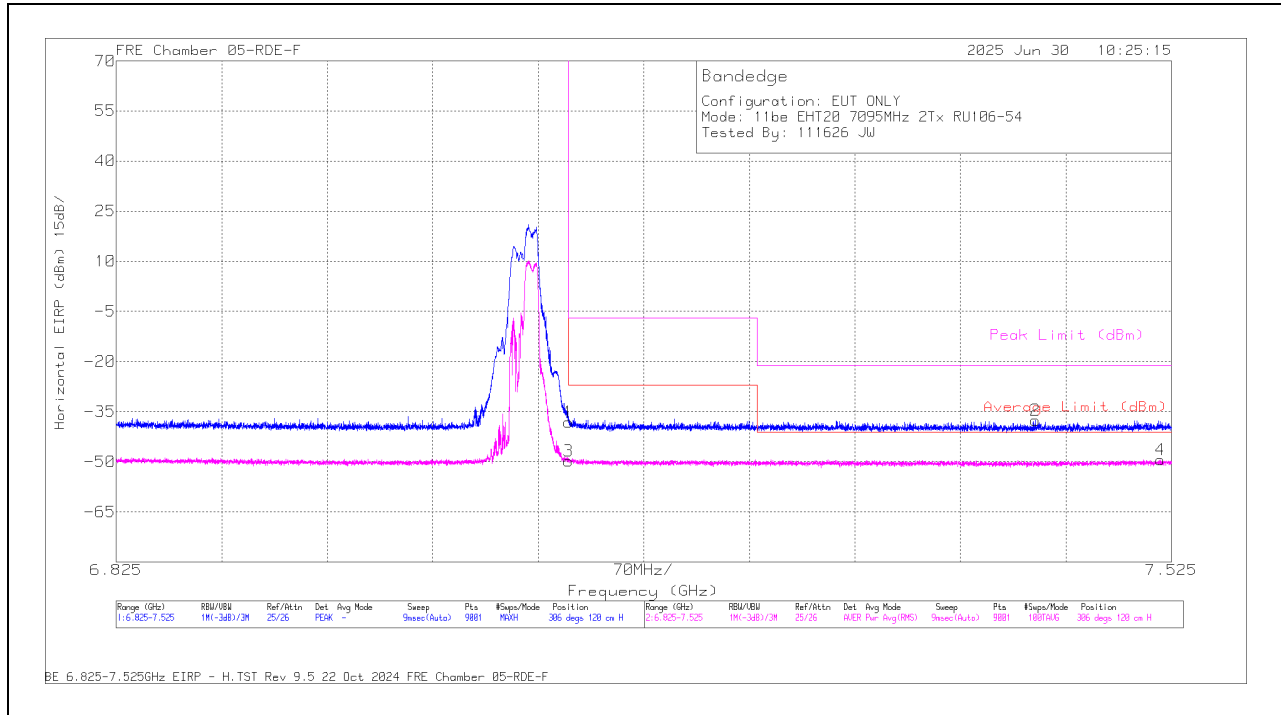
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106 / Index 54)	7095	6 + 5	7.125	-48.52	Pk	35.7	11.8	0	-37.13	-38.15	-	-	-7	-31.15	306	120	H
			* 7.434624	-47.81	Pk	35.6	11.8	0	-37.1	-37.51	-	-	-21.2	-16.31	306	120	H
			7.125	-60.32	RMS	35.7	11.8	0.1	-37.13	-49.85	-27	-22.85	-	-	306	120	H
			* 7.517691	-59.95	RMS	35.6	11.8	0.1	-36.94	-49.39	-41.2	-8.19	-	-	306	120	H
			7.125	-50.52	Pk	35.7	11.8	0	-37.13	-40.15	-	-	-7	-33.15	359	210	V
			* 7.371702	-48.03	Pk	35.6	11.8	0	-37.01	-37.64	-	-	-21.2	-16.44	359	210	V
			7.125	-60.69	RMS	35.7	11.8	0.1	-37.13	-50.22	-27	-23.22	-	-	359	210	V
			* 7.301624	-59.95	RMS	35.7	11.8	0.1	-36.95	-49.3	-41.2	-8.1	-	-	359	210	V
EHT40 (RU 106 / Index 56)	7085	6 + 5	7.125	-46.2	Pk	35.7	11.8	0	-36.51	-35.21	-	-	-7	-28.21	150	143	H
			7.125	-59.37	RMS	35.7	11.8	0	-36.51	-48.38	-27	-21.38	-	-	150	143	H
			* 7.308857	-47.23	Pk	35.6	11.8	0	-36.88	-36.71	-	-	-21.2	-15.51	150	143	H
			* 7.50968	-58.76	RMS	35.7	11.8	0	-37.08	-48.34	-41.2	-7.14	-	-	150	143	H
			7.125	-50.14	Pk	35.7	11.8	0	-36.51	-39.15	-	-	-7	-32.15	239	204	V
			7.125	-59.92	RMS	35.7	11.8	0	-36.51	-48.93	-27	-21.93	-	-	239	204	V
			* 7.410902	-47.3	Pk	35.6	11.8	0	-36.98	-36.88	-	-	-21.2	-15.68	239	204	V
			* 7.497857	-58.98	RMS	35.7	11.8	0	-36.99	-48.47	-41.2	-7.27	-	-	239	204	V
EHT80 (RU 484+242 / Index 93)	7025	6 + 5	7.125	-32.25	Pk	35.6	11.8	0	-37.18	-22.03	-	-	-7	-15.03	332	108	H
			7.125	-46.65	RMS	35.6	11.8	0	-37.18	-36.43	-27	-9.43	-	-	332	108	H
			* 7.127012	-28.43	Pk	35.6	11.8	0	-37.24	-18.27	-	-	-7	-11.27	332	108	H
			* 7.49568	-59.23	RMS	35.6	11.8	0	-37.37	-49.2	-41.2	-8	-	-	332	108	H
			7.125	-45.98	Pk	35.6	11.8	0	-37.18	-35.76	-	-	-7	-28.76	338	125	V
			7.125	-57.24	RMS	35.6	11.8	0	-37.18	-47.02	-27	-20.02	-	-	338	125	V
			* 7.402113	-59.34	RMS	35.6	11.8	0	-37.53	-49.47	-41.2	-8.27	-	-	338	125	V
			* 7.500113	-46.71	Pk	35.6	11.8	0	-37.4	-36.71	-	-	-21.2	-15.51	338	125	V
EHT160 (RU 484+242 / Index 93)	6985	6 + 5	* 7.37699	-47.92	Pk	35.4	11.8	0	-34.48	-35.2	-	-	-21.2	-14	81	230	H
			* 7.477713	-60.24	RMS	35.4	11.8	0	-34.26	-47.3	-41.2	-6.1	-	-	81	230	H
			7.125	-48.64	Pk	35.5	11.8	0	-34.6	-35.94	-	-	-7	-28.94	81	230	H
			7.125	-60.14	RMS	35.5	11.8	0	-34.6	-47.44	-27	-20.44	-	-	81	230	H
			* 7.506802	-47.76	Pk	35.4	11.8	0	-34.36	-34.92	-	-	-21.2	-13.72	71	235	V
			* 7.519946	-60.21	RMS	35.5	11.8	0	-34.38	-47.29	-41.2	-6.09	-	-	71	235	V
			7.125	-50.98	Pk	35.5	11.8	0	-34.6	-38.28	-	-	-7	-31.28	71	235	V
			7.125	-61.19	RMS	35.5	11.8	0	-34.6	-48.49	-27	-21.49	-	-	71	235	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: 106-Tone, RU Index 54**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

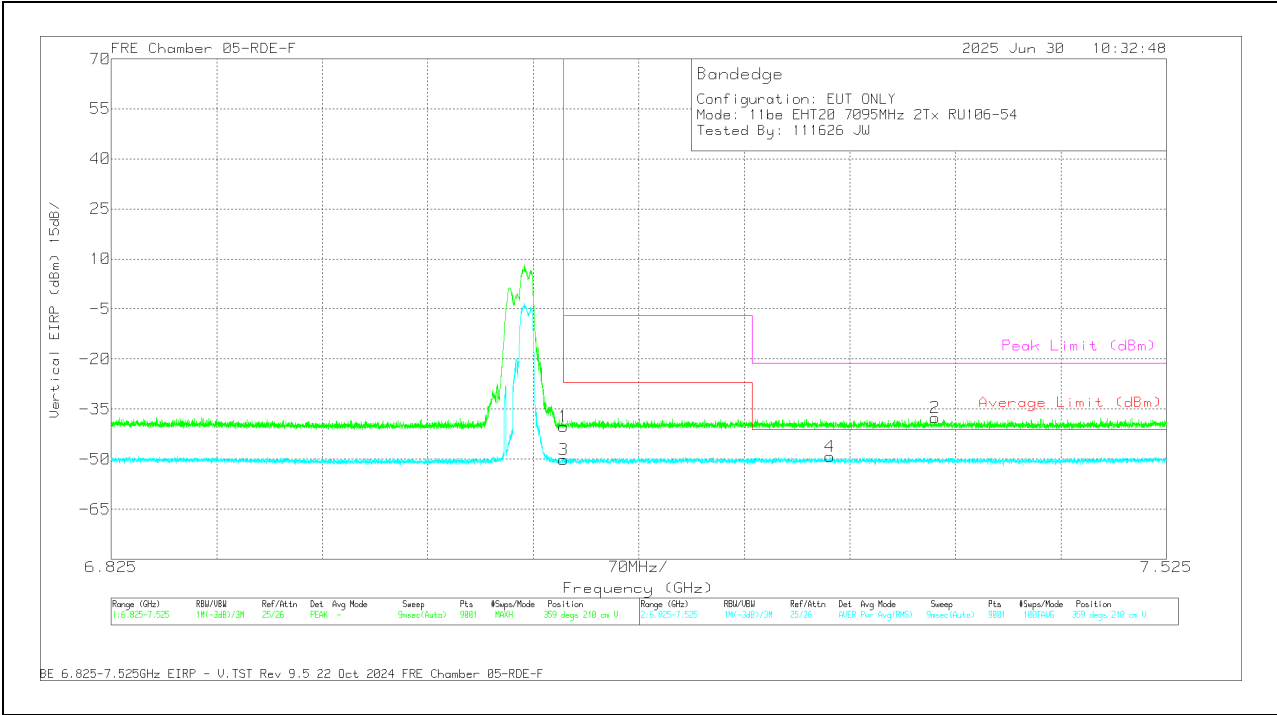
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-48.52	Pk	35.7	11.8	0	-37.13	-38.15	-	-	-7	-31.15	306	120	H
2	* 7.434624	-47.81	Pk	35.6	11.8	0	-37.1	-37.51	-	-	-21.2	-16.31	306	120	H
3	7.125	-60.32	RMS	35.7	11.8	0.1	-37.13	-49.85	-27	-22.85	-	-	306	120	H
4	* 7.517691	-59.95	RMS	35.6	11.8	0.1	-36.94	-49.39	-41.2	-8.19	-	-	306	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-50.52	Pk	35.7	11.8	0	-37.13	-40.15	-	-	-7	-33.15	359	210	V
2	* 7.371702	-48.03	Pk	35.6	11.8	0	-37.01	-37.64	-	-	-21.2	-16.44	359	210	V
3	7.125	-60.69	RMS	35.7	11.8	0.1	-37.13	-50.22	-27	-23.22	-	-	359	210	V
4	* 7.301624	-59.95	RMS	35.7	11.8	0.1	-36.95	-49.3	-41.2	-8.1	-	-	359	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

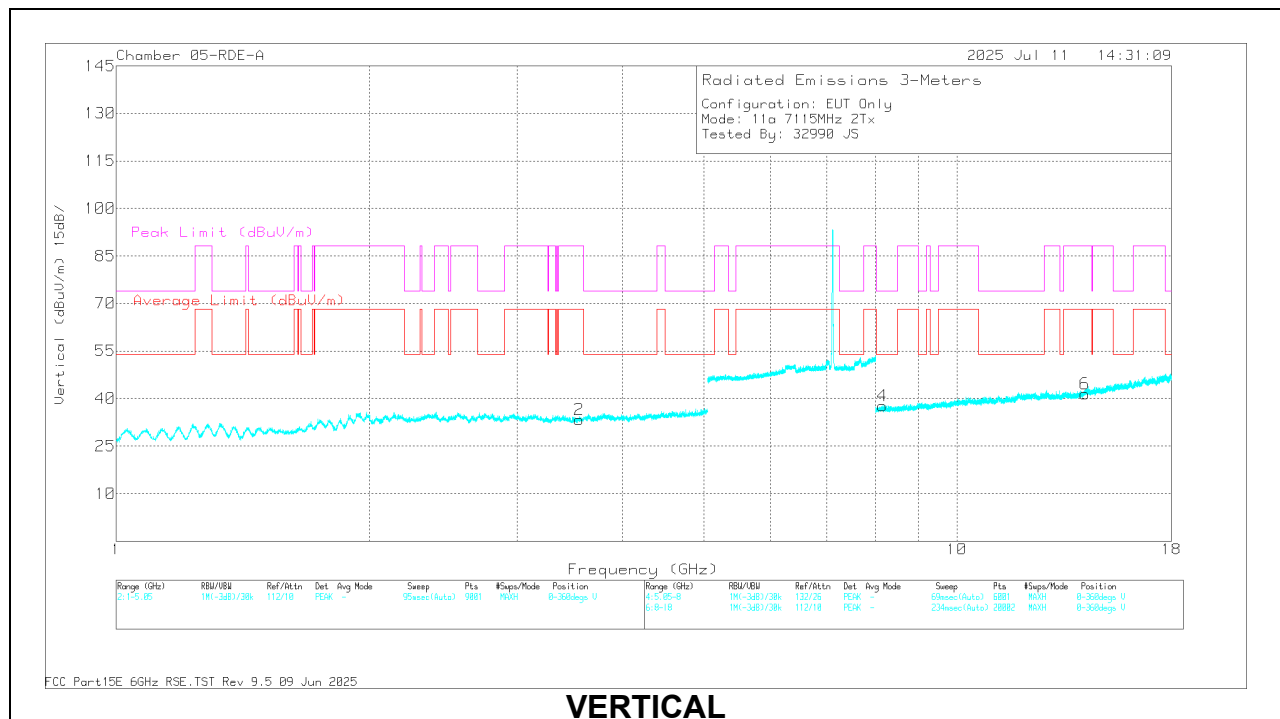
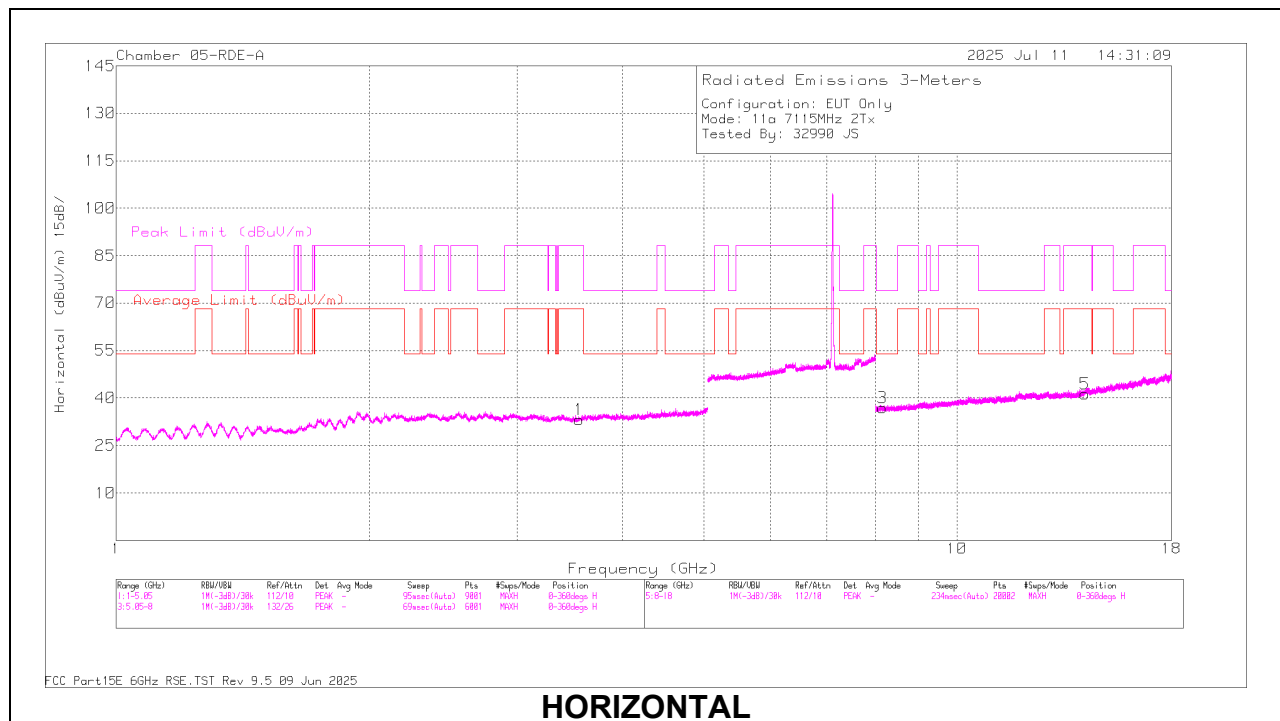
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 3.554302	57.76	PK-U	33.3	-46.53	0	44.53	-	-	88.2	-43.67	108	137	H
			* 3.555204	45.6	ADR	33.3	-46.6	0	32.3	68.2	-35.9	-	-	108	137	H
			* 3.571158	57.33	PK-U	33.4	-46.58	0	44.15	-	-	88.2	-44.05	165	119	V
			* 3.560981	45.66	ADR	33.4	-46.6	0	32.46	68.2	-35.74	-	-	165	119	V
			* 8.176458	55.08	PK-U	36	-44.05	0	47.03	-	-	74	-26.97	0	276	H
			* 8.178234	43.65	ADR	36	-44.1	0	35.55	54	-18.45	-	-	0	276	H
			* 8.154873	55.12	PK-U	36	-43.9	0	47.22	-	-	74	-26.78	184	217	V
			* 8.150657	43.51	ADR	36	-43.8	0	35.71	54	-18.29	-	-	184	217	V
			14.20227	53.42	PK-U	39.3	-40.6	0	52.12	-	-	88.2	-36.08	232	295	V
			14.207022	41.78	ADR	39.3	-40.7	0	40.38	68.2	-27.82	-	-	232	295	V
			14.20711	53.55	PK-U	39.3	-40.7	0	52.15	-	-	88.2	-36.05	315	189	H
			14.225968	42.08	ADR	39.3	-40.7	0	40.68	68.2	-27.52	-	-	315	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
* 3.554302	57.76	PK-U	33.3	0	-46.53	44.53	-	-	88.2	-43.67	108	137	H
* 3.555204	45.6	ADR	33.3	0	-46.6	32.3	68.2	-35.9	-	-	108	137	H
* 3.571158	57.33	PK-U	33.4	0	-46.58	44.15	-	-	88.2	-44.05	165	119	V
* 3.560981	45.66	ADR	33.4	0	-46.6	32.46	68.2	-35.74	-	-	165	119	V
* 8.176458	55.08	PK-U	36	0	-44.05	47.03	-	-	74	-26.97	0	276	H
* 8.178234	43.65	ADR	36	0	-44.1	35.55	54	-18.45	-	-	0	276	H
* 8.154873	55.12	PK-U	36	0	-43.9	47.22	-	-	74	-26.78	184	217	V
* 8.150657	43.51	ADR	36	0	-43.8	35.71	54	-18.29	-	-	184	217	V
14.20227	53.42	PK-U	39.3	0	-40.6	52.12	-	-	88.2	-36.08	232	295	V
14.207022	41.78	ADR	39.3	0	-40.7	40.38	68.2	-27.82	-	-	232	295	V
14.20711	53.55	PK-U	39.3	0	-40.7	52.15	-	-	88.2	-36.05	315	189	H
14.225968	42.08	ADR	39.3	0	-40.7	40.68	68.2	-27.52	-	-	315	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

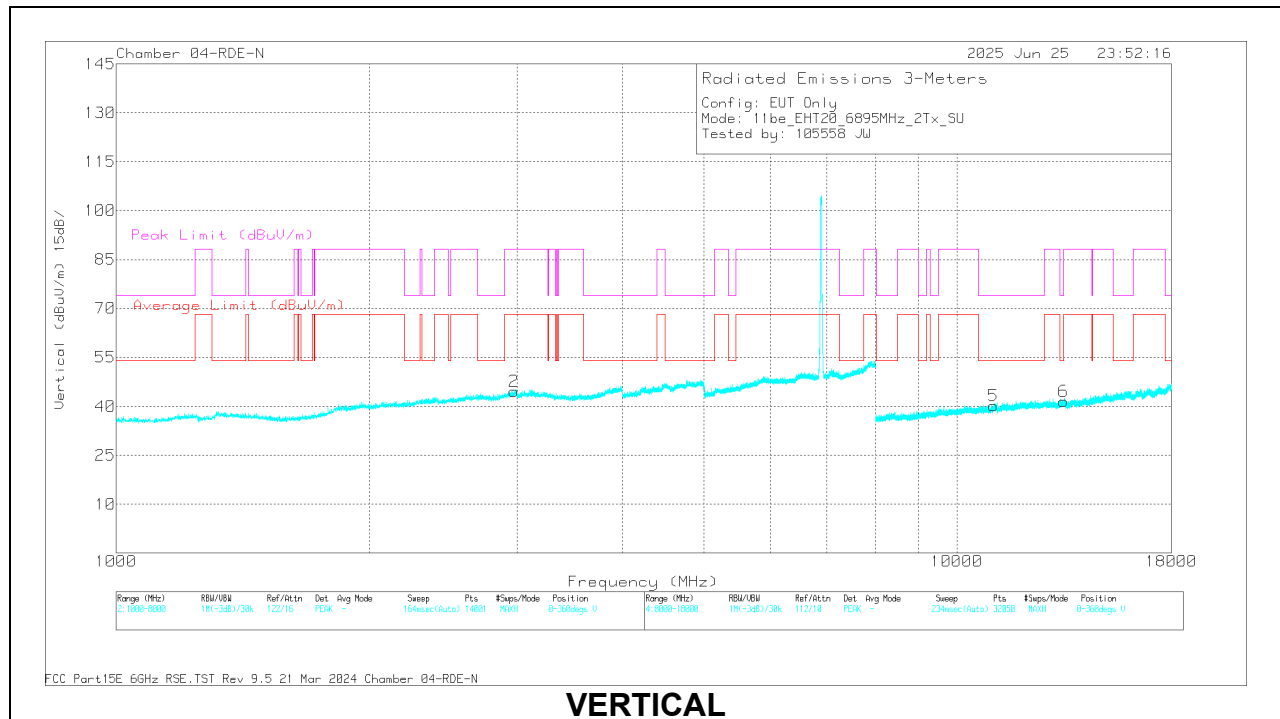
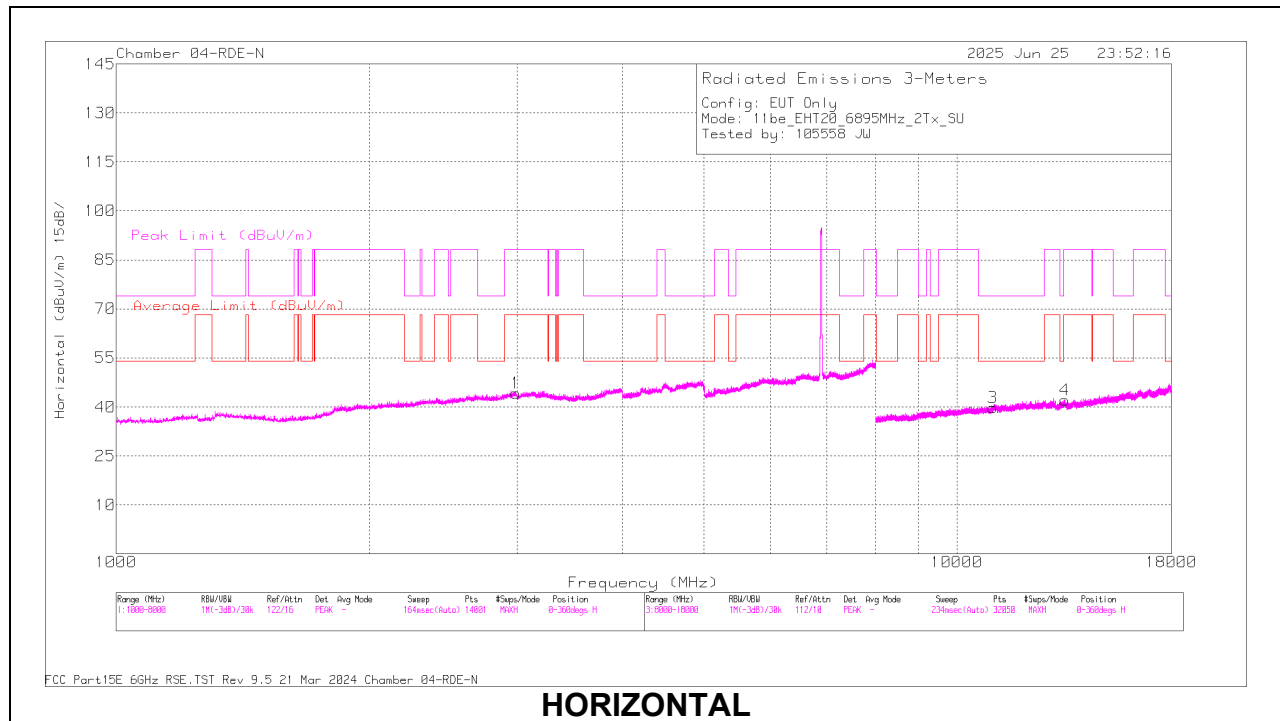
20MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6895	6 + 5	* 11.049103	56.95	PK-U	37.9	-44.81	0	50.04	-	-	74	-23.96	268	298	H
			* 11.053032	45.38	ADR	37.9	-44.78	0.13	38.63	54	-15.37	-	-	268	298	H
			* 11.065157	57.33	PK-U	37.9	-44.54	0	50.69	-	-	74	-23.31	86	386	V
			* 11.063931	45.7	ADR	37.9	-44.59	0.13	39.14	54	-14.86	-	-	86	386	V
			* 13.384112	55.62	PK-U	39	-43.8	0	50.82	-	-	74	-23.18	55	195	V
			2.971459	46.56	PK-U	32.8	-25.71	0	53.65	-	-	88.2	-34.55	232	159	V
			2.980493	46.17	PK-U	32.8	-25.66	0	53.31	-	-	88.2	-34.89	3	117	H
			2.988092	34.95	ADR	32.8	-25.66	0.13	42.22	68.2	-25.98	-	-	232	159	V
			2.989175	34.79	ADR	32.8	-25.68	0.13	42.04	68.2	-26.16	-	-	3	117	H
			13.405968	44.48	ADR	39	-43.32	0.13	40.29	68.2	-27.91	-	-	55	195	V
			13.4317	44.85	ADR	38.9	-43.19	0.13	40.69	68.2	-27.51	-	-	69	386	H
			13.436095	56.17	PK-U	38.9	-43.26	0	51.81	-	-	88.2	-36.39	69	386	H
	6995	6 + 5	* 4.52831	46.96	PK-U	33.9	-25.06	0	55.8	-	-	74	-18.2	348	320	H
			* 4.508657	35.11	ADR	33.9	-24.83	0.13	44.31	54	-9.69	-	-	348	320	H
			* 4.956857	47.52	PK-U	34.4	-24.67	0	57.25	-	-	74	-16.75	356	400	V
			* 4.938537	35.6	ADR	34.4	-24.56	0.13	45.57	54	-8.43	-	-	356	400	V
			* 11.107952	56.81	PK-U	38	-44.8	0	50.01	-	-	74	-23.99	216	145	H
			* 11.122814	45.04	ADR	38	-44.39	0.13	38.78	54	-15.22	-	-	216	145	H
			* 11.072275	57.65	PK-U	37.9	-44.56	0	50.99	-	-	74	-23.01	339	344	V
			* 11.062832	45.59	ADR	37.9	-44.62	0.13	39	54	-15	-	-	339	344	V
			13.788835	56.21	PK-U	38.9	-43.35	0	51.76	-	-	88.2	-36.44	308	373	V
			13.790467	44.46	ADR	38.9	-43.38	0.13	40.11	68.2	-28.09	-	-	308	373	V
			13.851713	56.14	PK-U	38.9	-43.69	0	51.35	-	-	88.2	-36.85	160	119	H
			13.855267	44.52	ADR	38.9	-43.75	0.13	39.8	68.2	-28.4	-	-	160	119	H
	7095	6 + 5	* 3.662899	46.46	PK-U	33.3	-25.52	0	54.24	-	-	74	-19.76	356	349	H
			* 3.675501	34.03	ADR	33.3	-25.44	0.13	42.02	54	-11.98	-	-	356	349	H
			* 3.644791	45.55	PK-U	33.3	-25.41	0	53.44	-	-	74	-20.56	324	327	V
			* 3.62849	33.96	ADR	33.2	-25.32	0.13	41.97	54	-12.03	-	-	324	327	V
			* 11.271714	57.16	PK-U	38.1	-44.65	0	50.61	-	-	74	-23.39	31	384	H
			* 11.298497	45.46	ADR	38.2	-44.95	0.13	38.84	54	-15.16	-	-	31	384	H
			* 11.238813	56.27	PK-U	38.1	-44.9	0	49.47	-	-	74	-24.53	341	243	V
			* 11.235403	44.95	ADR	38.1	-44.81	0.13	38.37	54	-15.63	-	-	341	243	V
			13.893582	56.06	PK-U	39	-43.86	0	51.2	-	-	88.2	-37	214	258	V
			13.900291	44.49	ADR	39	-43.83	0.13	39.79	68.2	-28.41	-	-	214	258	V
			13.922048	44.75	ADR	39	-43.64	0.13	40.24	68.2	-27.96	-	-	344	146	H
			13.928792	56.11	PK-U	39	-43.71	0	51.4	-	-	88.2	-36.8	344	146	H
11be (Partial RU Mode / Highest PSD)	6895 (106T)	6 + 5	* 2.249506	49.95	ADR	32.2	-50.92	0.09	31.32	54	-22.68	-	-	344	211	H
			* 2.25059	61.63	PK-U	32.2	-50.92	0	42.91	-	-	74	-31.09	344	211	H
			* 2.250675	49.76	ADR	32.2	-50.92	0.09	31.13	54	-22.87	-	-	17	205	V
			* 2.251059	61.13	PK-U	32.2	-50.92	0	42.41	-	-	74	-31.59	17	205	V
			* 4.283683	45.91	ADR	34.2	-47.1	0.09	33.1	54	-20.9	-	-	196	242	H
			* 4.284494	45.91	ADR	34.2	-47.11	0.09	33.09	54	-20.91	-	-	142	294	V
			* 4.284816	57.89	PK-U	34.2	-47.12	0	44.97	-	-	74	-29.03	142	294	V
			* 4.285093	57.55	PK-U	34.2	-47.12	0	44.63	-	-	74	-29.37	196	242	H
			* 12.14676	44.07	ADR	38.9	-43.85	0.09	39.21	54	-14.79	-	-	194	151	H
			* 12.148126	55.8	PK-U	38.9	-43.78	0	50.92	-	-	74	-23.08	121	222	V
			* 12.149438	55.57	PK-U	38.9	-43.85	0	50.62	-	-	74	-23.38	194	151	H
			* 12.150127	44.31	ADR	38.9	-43.93	0.09	39.37	54	-14.63	-	-	121	222	V
	6995 (106T)	6 + 5	* 2.242473	49.61	ADR	32.2	-50.9	0.09	31	54	-23	-	-	277	193	H
			* 2.243749	49.75	ADR	32.2	-50.92	0.09	31.12	54	-22.88	-	-	277	193	V
			* 2.243959	60.82	PK-U	32.2	-50.93	0	42.09	-	-	74	-31.91	277	193	H
			* 2.244779	61.87	PK-U	32.2	-50.92	0	43.15	-	-	74	-30.85	225	198	V
			* 4.312788	46.24	ADR	34.2	-47.58	0.09	32.95	54	-21.05	-	-	277	382	V
			* 4.314821	57.91	PK-U	34.2	-47.58	0	44.53	-	-	74	-29.47	277	382	V
			* 4.31527	46.1	ADR	34.2	-47.58	0.09	32.81	54	-21.19	-	-	324	252	H
			* 4.315692	57.83	PK-U	34.2	-47.58	0	44.45	-	-	74	-29.55	324	252	H
			* 12.505784	43.81	ADR	39	-44.27	0.09	38.63	54	-15.37	-	-	178	186	V
			* 12.507297	55.61	PK-U	39	-44.31	0	50.3	-	-	74	-23.7	178	186	V
			* 12.508604	55.08	PK-U	39	-44.32	0	49.76	-	-	74	-24.24	221	230	H
			* 12.5089	43.99	ADR	39	-44.32	0.09	38.76	54	-15.24	-	-	221	230	H
	7095 (106T)	6 + 5	* 2.255931	61.45	PK-U	32.2	-50.89	0	42.76	-	-	74	-31.24	190	165	V
			* 2.256342	61.47	PK-U	32.2	-50.9	0	42.77	-	-	74	-31.23	127	121	H
			* 2.256413	50.01	ADR	32.2	-50.91	0.09	31.39	54	-22.61	-	-	127	121	H
			* 2.256818	49.65	ADR	32.2	-50.92	0.09	31.02	54	-22.98	-	-	190	165	V
			* 4.311659	57.7	PK-U	34.2	-47.59	0	44.31	-	-	74	-29.69	50	361	V
			* 4.311864	46.16	ADR	34.2	-47.6	0.09	32.85	54	-21.15	-	-	50	361	V
			* 4.317587	46.14	ADR	34.2	-47.59	0.09	32.84	54	-21.16	-	-	194	193	H
			* 4.319527	57.76	PK-U	34.2	-47.65	0	44.31	-	-	74	-29.69	194	193	H
			* 12.168468	55.5	PK-U	38.9	-44.31	0	50.09	-	-	74	-23.91	354	171	H
			* 12.168833	44.15	ADR	38.9	-44.29	0.09	38.85	54	-15.15	-	-	12	269	V
			* 12.169325	55.9	PK-U	38.9	-44.25	0	50.55	-	-	74	-23.45	12	269	V
			* 12.170519	44.34	ADR	38.9	-44.26	0.09	39.07	54	-14.93	-	-	354	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6895MHz)

RADIATED EMISSIONS

Frequency (MHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.049103	56.95	PK-U	37.9	0	-44.81	50.04	-	-	74	-23.96	268	298	H
* 11.053032	45.38	ADR	37.9	0.13	-44.78	38.63	54	-15.37	-	-	268	298	H
* 11.065157	57.33	PK-U	37.9	0	-44.54	50.69	-	-	74	-23.31	86	386	V
* 11.063931	45.7	ADR	37.9	0.13	-44.59	39.14	54	-14.86	-	-	86	386	V
* 13.384112	55.62	PK-U	39	0	-43.8	50.82	-	-	74	-23.18	55	195	V
2.971459	46.56	PK-U	32.8	0	-25.71	53.65	-	-	88.2	-34.55	232	159	V
2.980493	46.17	PK-U	32.8	0	-25.66	53.31	-	-	88.2	-34.89	3	117	H
2.988092	34.95	ADR	32.8	0.13	-25.66	42.22	68.2	-25.98	-	-	232	159	V
2.989175	34.79	ADR	32.8	0.13	-25.68	42.04	68.2	-26.16	-	-	3	117	H
13.405968	44.48	ADR	39	0.13	-43.32	40.29	68.2	-27.91	-	-	55	195	V
13.4317	44.85	ADR	38.9	0.13	-43.19	40.69	68.2	-27.51	-	-	69	386	H
13.436095	56.17	PK-U	38.9	0	-43.26	51.81	-	-	88.2	-36.39	69	386	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

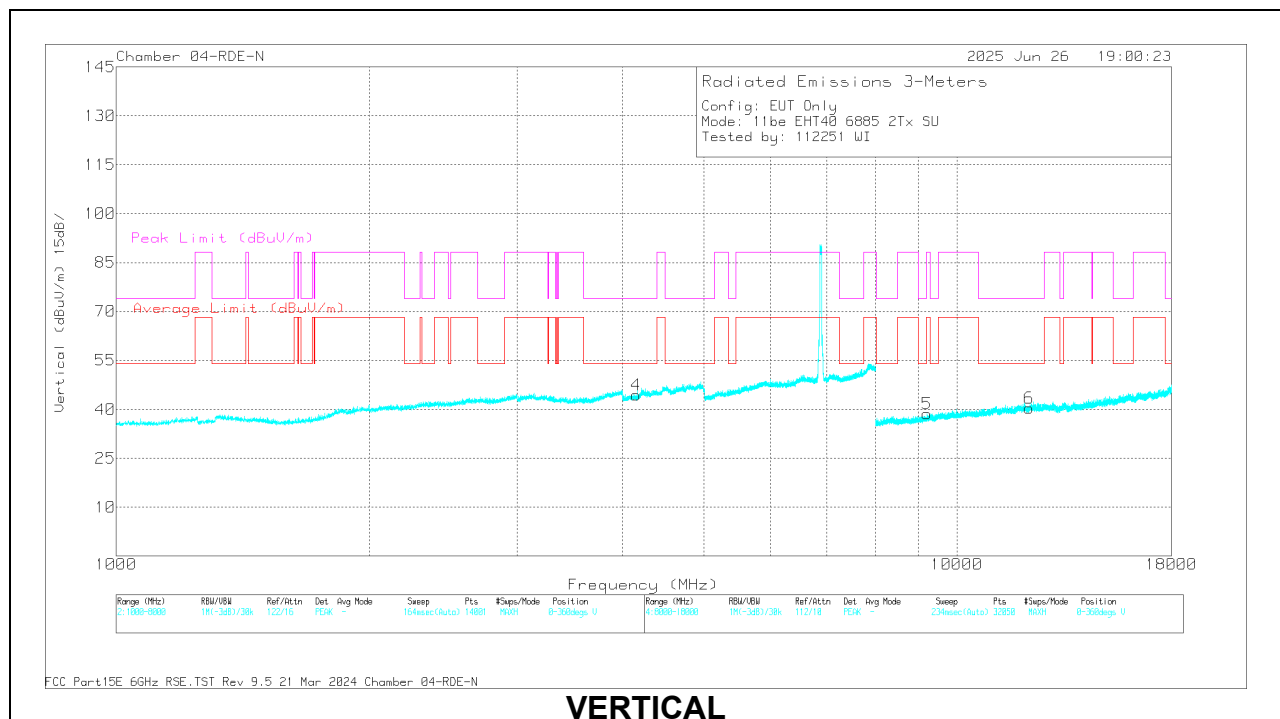
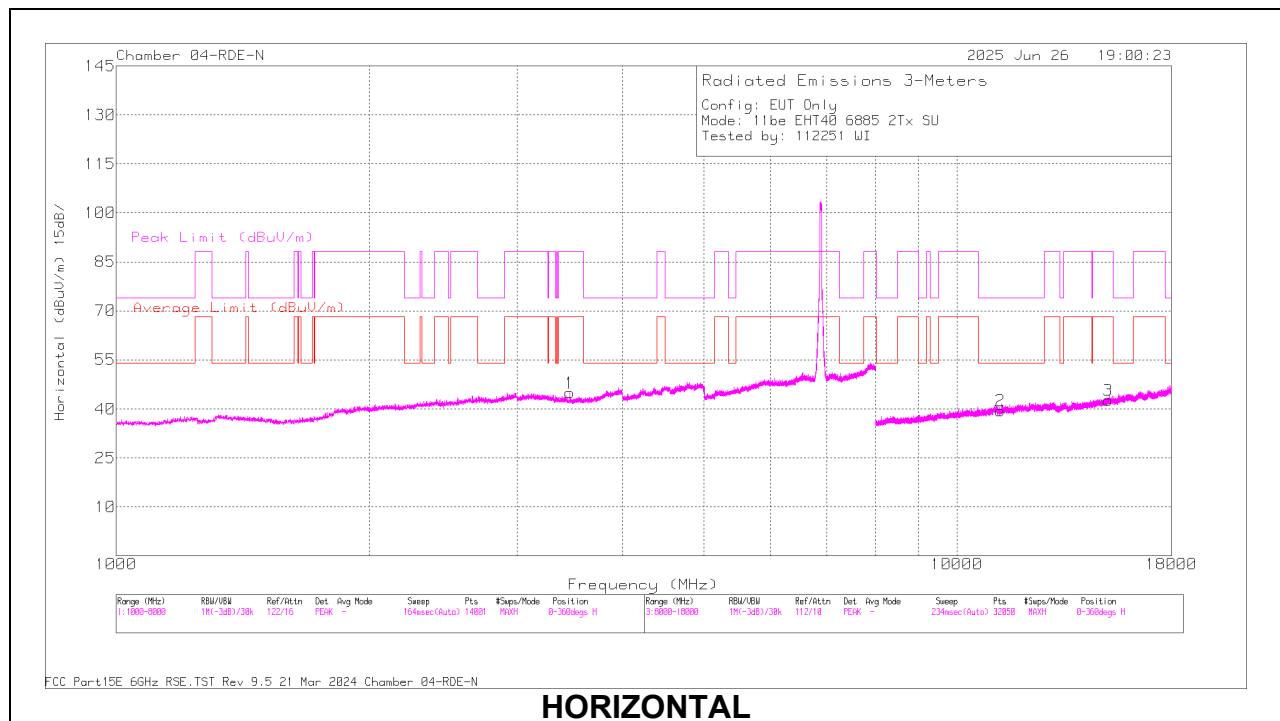
40MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6885 (Straddle)	6 + 5	* 4.170344	46.7	PK-U	33.7	-25.19	0	55.21	-	-	74	-18.79	287	238	V
			* 4.172444	34.21	ADR	33.7	-25.22	0.23	42.92	54	-11.08	-	-	287	238	V
			* 11.278121	56.26	PK-U	38.1	-44.71	0	49.65	-	-	74	-24.35	357	127	H
			* 11.280922	45.06	ADR	38.1	-44.76	0.23	38.63	54	-15.37	-	-	357	127	H
			* 12.206423	55.41	PK-U	38.9	-44.21	0	50.1	-	-	74	-23.9	313	144	V
			* 12.17457	44.12	ADR	38.9	-44.18	0.23	39.07	54	-14.93	-	-	313	144	V
			3.452863	34.06	ADR	33	-25.6	0.23	41.69	68.2	-26.51	-	-	282	108	H
			3.471328	45.59	PK-U	33	-25.54	0	53.05	-	-	88.2	-35.15	282	108	H
			9.222157	57.22	PK-U	36.4	-45.41	0	48.21	-	-	88.2	-39.99	260	151	V
			9.231799	45.49	ADR	36.4	-45.46	0.23	36.66	68.2	-31.54	-	-	260	151	V
			15.120366	56.75	PK-U	39.9	-43.86	0	52.79	-	-	88.2	-35.41	313	245	H
			15.144281	44.78	ADR	39.9	-43.72	0.23	41.19	68.2	-27.01	-	-	313	245	H
			* 11.149567	57.41	PK-U	38	-43.93	0	51.48	-	-	74	-22.52	49	386	H
			* 11.163723	45.11	ADR	38	-44.38	0.23	38.96	54	-15.04	-	-	49	386	H
			* 9.008254	57.3	PK-U	36.3	-45.33	0	48.27	-	-	74	-25.73	200	394	V
			5.831694	33.98	ADR	35.1	-23.45	0.23	45.86	68.2	-22.34	-	-	357	237	H
			5.85343	45.61	PK-U	35.1	-23.52	0	57.19	-	-	88.2	-31.01	357	237	H
	6965	6 + 5	6.095335	33.95	ADR	35.4	-23.37	0.23	46.21	68.2	-21.99	-	-	124	246	V
			6.127981	45.26	PK-U	35.5	-23.52	0	57.24	-	-	88.2	-30.96	124	246	V
			8.97275	45.67	ADR	36.3	-45.64	0.23	36.56	68.2	-31.64	-	-	94	391	H
			8.983725	56.71	PK-U	36.3	-45.64	0	47.37	-	-	88.2	-40.83	94	391	H
			8.998971	45.57	ADR	36.3	-45.58	0.23	36.52	68.2	-31.68	-	-	200	394	V
			13.463402	56.1	PK-U	38.9	-43.38	0	51.62	-	-	88.2	-36.58	24	372	V
			13.475905	44.41	ADR	38.9	-43.26	0.23	40.28	68.2	-27.92	-	-	24	372	V
			* 9.131126	56.57	PK-U	36.4	-44.78	0	48.19	-	-	74	-25.81	62	127	H
			* 9.130435	44.63	ADR	36.4	-44.77	0.23	36.49	54	-17.51	-	-	62	127	H
			* 12.332664	55.8	PK-U	38.8	-43.74	0	50.86	-	-	74	-23.14	228	180	H
			* 12.352141	44.25	ADR	38.8	-43.85	0.23	39.43	54	-14.57	-	-	228	180	H
			* 15.557055	55.87	PK-U	40.2	-43.31	0	52.76	-	-	74	-21.24	262	165	V
			* 15.566405	44.11	ADR	40.2	-43.38	0.23	41.16	54	-12.84	-	-	262	165	V
			1.813374	34.37	ADR	30.5	-27.04	0.23	38.06	68.2	-30.14	-	-	96	204	H
			1.815263	45.73	PK-U	30.5	-27.03	0	49.2	-	-	88.2	-39	96	204	H
			5.337996	45.51	PK-U	34.4	-24.09	0	55.82	-	-	88.2	-32.38	221	261	V
			5.348127	33.78	ADR	34.4	-24.13	0.23	44.28	68.2	-23.92	-	-	221	261	V
	7085	6 + 5	8.743841	45.21	ADR	36.2	-45.41	0.23	36.23	68.2	-31.97	-	-	10	399	V
			8.749382	56.76	PK-U	36.2	-45.44	0	47.52	-	-	88.2	-40.68	10	399	V
11be (Partial RU Mode / Highest PSD)	6885 (Straddle) (106T)	6 + 5	* 2.256559	61.22	PK-U	32.2	-50.91	0	42.51	-	-	74	-31.49	0	101	H
			* 2.257157	49.77	ADR	32.2	-50.93	0	31.04	54	-22.96	-	-	0	101	H
			* 2.258518	49.84	ADR	32.1	-50.94	0	31	54	-23	-	-	224	186	V
			* 2.258637	61.23	PK-U	32.1	-50.94	0	42.39	-	-	74	-31.61	224	186	V
			* 4.335933	47.1	ADR	34.3	-47.89	0	33.51	54	-20.49	-	-	255	215	V
			* 4.337794	59.11	PK-U	34.3	-47.95	0	45.46	-	-	74	-28.54	255	215	V
			* 4.338121	47.15	ADR	34.3	-47.97	0	33.48	54	-20.52	-	-	47	118	H
			* 4.338216	59.27	PK-U	34.3	-47.97	0	45.6	-	-	74	-28.4	47	118	H
			* 12.210299	44.57	ADR	38.9	-43.94	0	39.53	54	-14.47	-	-	210	299	H
			* 12.210739	56.16	PK-U	38.9	-43.94	0	51.12	-	-	74	-22.88	210	299	H
			* 12.212721	56.14	PK-U	38.9	-43.97	0	51.07	-	-	74	-22.93	196	247	V
			* 12.213573	44.6	ADR	38.9	-43.88	0	39.62	54	-14.38	-	-	196	247	V
			* 2.244653	61.81	PK-U	32.2	-50.92	0	43.09	-	-	74	-30.91	19	375	H
			* 2.246278	49.82	ADR	32.2	-50.91	0	31.11	54	-22.89	-	-	19	375	H
			* 2.247037	49.93	ADR	32.2	-50.91	0	31.22	54	-22.78	-	-	9	247	V
			* 2.247404	61.67	PK-U	32.2	-50.91	0	42.96	-	-	74	-31.04	9	247	V
			* 4.126236	57.93	PK-U	33.7	-47.4	0	44.23	-	-	74	-29.77	179	273	V
	6965 (106T)	6 + 5	* 4.12722	46.5	ADR	33.7	-47.41	0	32.79	54	-21.21	-	-	86	242	H
			* 4.127449	58.25	PK-U	33.7	-47.41	0	44.54	-	-	74	-29.46	86	242	H
			* 4.12978	46.57	ADR	33.7	-47.5	0	32.77	54	-21.23	-	-	179	273	V
			* 12.292641	55.91	PK-U	38.9	-43.46	0	51.35	-	-	74	-22.65	307	189	H
			* 12.293749	44.52	ADR	38.9	-43.43	0	39.99	54	-14.01	-	-	307	189	H
			* 12.298393	44.43	ADR	38.9	-43.31	0	40.02	54	-13.98	-	-	171	111	V
			* 12.298799	56.11	PK-U	38.9	-43.3	0	51.71	-	-	74	-22.29	171	111	V
			* 2.247544	49.71	ADR	32.2	-50.92	0	30.99	54	-23.01	-	-	138	249	V
			* 2.249483	61.34	PK-U	32.2	-50.92	0	42.62	-	-	74	-31.38	138	249	V
			* 2.249511	49.75	ADR	32.2	-50.92	0	31.03	54	-22.97	-	-	272	323	H
			* 2.249747	61.8	PK-U	32.2	-50.92	0	43.08	-	-	74	-30.92	272	323	H
			* 4.311229	57.68	PK-U	34.2	-47.58	0	44.3	-	-	74	-29.7	203	241	H
			* 4.311398	45.95	ADR	34.2	-47.58	0	32.57	54	-21.43	-	-	203	241	H
			* 4.314709	46.2	ADR	34.2	-47.58	0	32.82	54	-21.18	-	-	27	316	V
			* 4.317282	58.25	PK-U	34.2	-47.58	0	44.87	-	-	74	-29.13	27	316	V
			* 12.44077	43.49	ADR	39	-44.3	0	38.19	54	-15.81	-	-	137	235	H
			* 12.443217	54.77	PK-U	39	-44.29	0	49.48	-	-	74	-24.52	137	235	H
			* 12.444667	43.4	ADR	39	-44.28	0	38.12	54	-15.88	-	-	121	170	V
			* 12.44715	54.98	PK-U	39	-44.31	0	49.67	-	-	74	-24.33	121	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6885MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.170344	46.7	PK-U	33.7	0	-25.19	55.21	-	-	74	-18.79	287	238	V
* 4.172444	34.21	ADR	33.7	0.23	-25.22	42.92	54	-11.08	-	-	287	238	V
* 11.278121	56.26	PK-U	38.1	0	-44.71	49.65	-	-	74	-24.35	357	127	H
* 11.280922	45.06	ADR	38.1	0.23	-44.76	38.63	54	-15.37	-	-	357	127	H
* 12.206423	55.41	PK-U	38.9	0	-44.21	50.1	-	-	74	-23.9	313	144	V
* 12.17457	44.12	ADR	38.9	0.23	-44.18	39.07	54	-14.93	-	-	313	144	V
3.452863	34.06	ADR	33	0.23	-25.6	41.69	68.2	-26.51	-	-	282	108	H
3.471328	45.59	PK-U	33	0	-25.54	53.05	-	-	88.2	-35.15	282	108	H
9.222157	57.22	PK-U	36.4	0	-45.41	48.21	-	-	88.2	-39.99	260	151	V
9.231799	45.49	ADR	36.4	0.23	-45.46	36.66	68.2	-31.54	-	-	260	151	V
15.120366	56.75	PK-U	39.9	0	-43.86	52.79	-	-	88.2	-35.41	313	245	H
15.144281	44.78	ADR	39.9	0.23	-43.72	41.19	68.2	-27.01	-	-	313	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

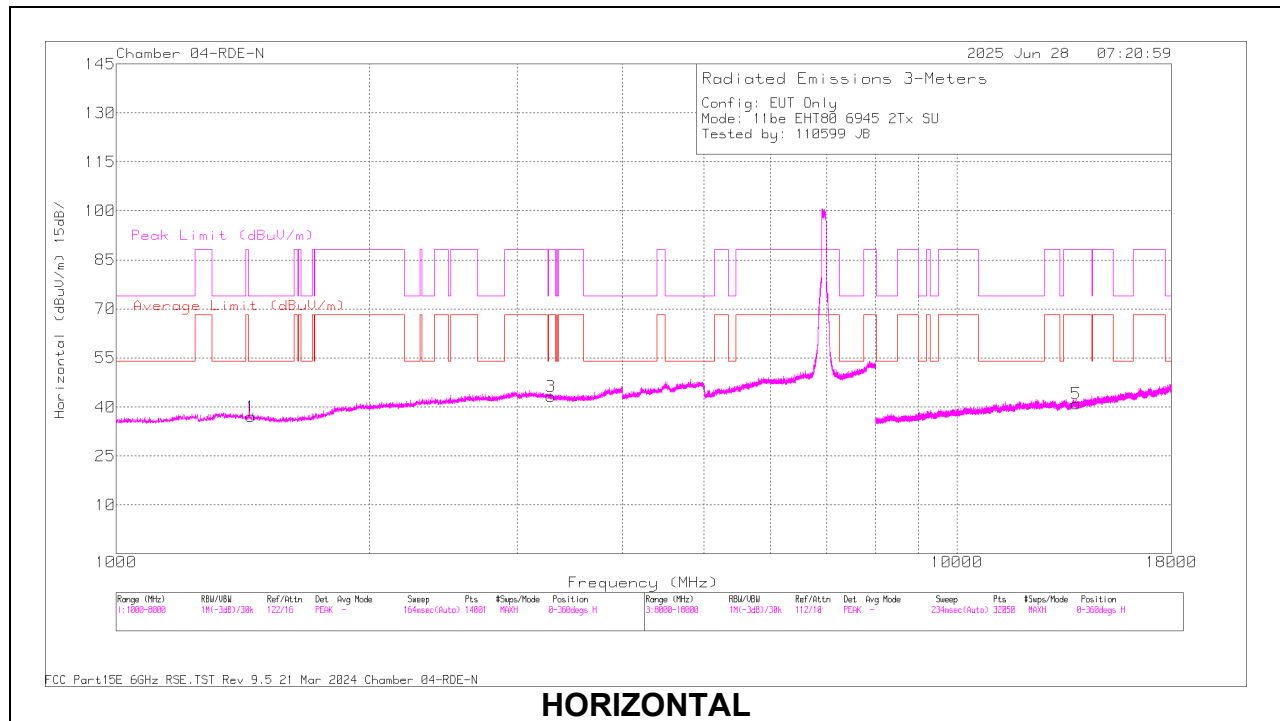
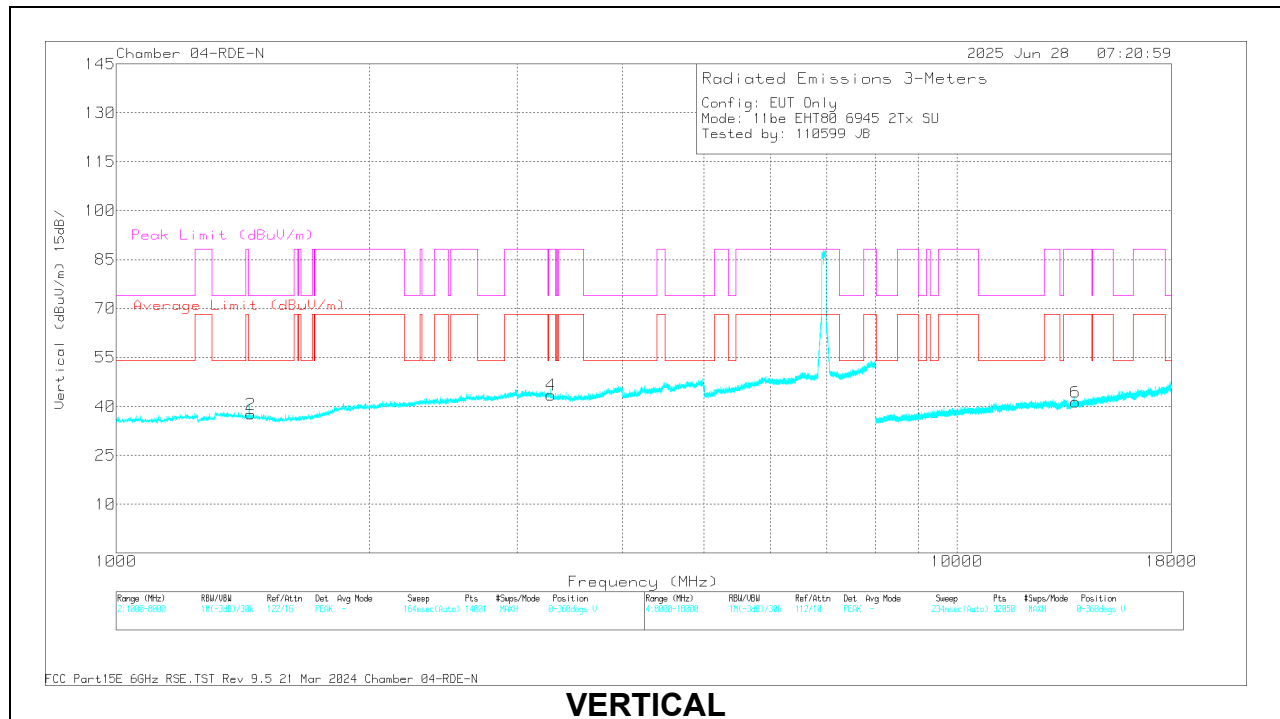
80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6945	6 + 5	* 1.436311	45.96	PK-U	28.5	-27.38	0	47.08	-	-	74	-26.92	357	183	H
			* 1.440031	47.57	PK-U	28.5	-27.33	0	48.74	-	-	74	-25.26	347	200	V
			* 1.440122	39.29	ADR	28.5	-27.33	0.41	40.87	54	-13.13	-	-	347	200	V
			1.429451	34.31	ADR	28.5	-27.38	0.41	35.84	68.2	-32.36	-	-	357	183	H
			3.279944	34.37	ADR	32.9	-25.68	0.41	42	68.2	-26.2	-	-	162	331	V
			3.288304	46.11	PK-U	32.9	-25.74	0	53.27	-	-	88.2	-34.93	106	289	H
			3.302994	34.5	ADR	32.9	-25.75	0.41	42.06	68.2	-26.14	-	-	106	289	H
			3.309479	46.31	PK-U	32.9	-25.71	0	53.5	-	-	88.2	-34.7	162	331	V
			13.849178	55.35	PK-U	38.9	-43.67	0	50.58	-	-	88.2	-37.62	357	204	V
			13.859804	44.25	ADR	38.9	-43.76	0.41	39.8	68.2	-28.4	-	-	357	204	V
			13.874377	56.16	PK-U	38.9	-43.99	0	51.07	-	-	88.2	-37.13	116	146	H
			13.883223	44.43	ADR	38.9	-43.93	0.41	39.81	68.2	-28.39	-	-	116	146	H
	7025	6 + 5	* 1.440208	48.39	PK-U	28.5	-27.33	0	49.56	-	-	74	-24.44	78	189	H
			* 1.440063	39.53	ADR	28.5	-27.33	0.41	41.11	54	-12.89	-	-	78	189	H
			* 1.439837	47.53	PK-U	28.5	-27.33	0	48.7	-	-	74	-25.3	138	214	V
			* 1.440083	39.87	ADR	28.5	-27.33	0.41	41.45	54	-12.55	-	-	138	214	V
			2.976878	46.87	PK-U	32.8	-25.72	0	53.95	-	-	88.2	-34.25	143	356	H
			2.983306	34.76	ADR	32.8	-25.63	0.41	42.34	68.2	-25.86	-	-	143	356	H
			2.988588	34.88	ADR	32.8	-25.67	0.41	42.42	68.2	-25.78	-	-	358	394	V
			3.010521	46.36	PK-U	32.8	-25.72	0	53.44	-	-	88.2	-34.76	358	394	V
			13.029964	44.5	ADR	38.9	-43.55	0.41	40.26	68.2	-27.94	-	-	331	322	V
			13.034457	56.04	PK-U	38.9	-43.72	0	51.22	-	-	88.2	-36.98	331	322	V
			13.043593	44.53	ADR	38.9	-43.83	0.41	40.01	68.2	-28.19	-	-	8	392	H
			13.065359	56.18	PK-U	38.9	-43.61	0	51.47	-	-	88.2	-36.73	8	392	H
11be (Partial RU Mode / Highest PSD)	6945 (484+242T- Index 93)	6 + 5	2.507422	61	PK-U	32.2	-50.05	0	43.15	-	-	88.2	-45.05	149	184	H
			2.507893	49.28	ADR	32.3	-50.06	0	31.52	68.2	-36.68	-	-	149	184	H
			* 3.804969	57.84	PK-U	33.4	-47.6	0	43.64	-	-	74	-30.36	142	277	H
			* 3.811258	45.98	ADR	33.4	-47.69	0	31.69	54	-22.31	-	-	142	277	H
			2.514831	60.73	PK-U	32.3	-50	0	43.03	-	-	88.2	-45.17	156	127	V
			2.509303	49.08	ADR	32.3	-50.04	0	31.34	68.2	-36.86	-	-	156	127	V
			* 3.799909	57.51	PK-U	33.4	-47.6	0	43.31	-	-	74	-30.69	289	254	V
			* 3.804472	45.9	ADR	33.4	-47.61	0	31.69	54	-22.31	-	-	289	254	V
			14.362669	55.3	PK-U	39.2	-44.04	0	50.46	-	-	88.2	-37.74	335	217	H
			14.365785	43.71	ADR	39.2	-44.08	0	38.83	68.2	-29.37	-	-	335	217	H
			14.35316	54.85	PK-U	39.2	-43.98	0	50.07	-	-	88.2	-38.13	349	199	V
			14.366423	43.4	ADR	39.2	-44.07	0	38.53	68.2	-29.67	-	-	349	199	V
	7025 (Straddle) (484+242T- Index 93)	6 + 5	2.391876	60.75	PK-U	32.3	-50.04	0	43.01	-	-	88.2	-45.19	328	200	H
			* 2.38649	48.76	ADR	32.3	-50	0	31.06	54	-22.94	-	-	328	200	H
			* 3.634775	58.24	PK-U	33.3	-47.66	0	43.88	-	-	74	-30.12	75	372	H
			3.645614	46.4	ADR	33.3	-47.65	0	32.05	54	-21.95	-	-	75	372	H
			2.402478	61.2	PK-U	32.4	-50.12	0	43.48	-	-	88.2	-44.72	245	304	V
			2.399727	48.82	ADR	32.4	-50.11	0	31.11	68.2	-37.09	-	-	245	304	V
			* 3.65039	58.14	PK-U	33.2	-47.67	0	43.67	-	-	74	-30.33	80	377	V
			* 3.647239	46.45	ADR	33.3	-47.66	0	32.09	54	-21.91	-	-	80	377	V
			14.466604	55.86	PK-U	39.2	-43.68	0	51.38	-	-	88.2	-36.82	95	295	H
			14.463624	43.53	ADR	39.2	-43.69	0	39.04	68.2	-29.16	-	-	95	295	H
			14.461776	55.32	PK-U	39.2	-43.64	0	50.88	-	-	88.2	-37.32	229	250	V
			14.464148	43.64	ADR	39.2	-43.68	0	39.16	68.2	-29.04	-	-	229	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6945MHz)**HORIZONTAL****VERTICAL**

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.436311	45.96	PK-U	28.5	-27.38	0	47.08	-	-	74	-26.92	357	183	H
* 1.440031	47.57	PK-U	28.5	-27.33	0	48.74	-	-	74	-25.26	347	200	V
* 1.440122	39.29	ADR	28.5	-27.33	0.41	40.87	54	-13.13	-	-	347	200	V
1.429451	34.31	ADR	28.5	-27.38	0.41	35.84	68.2	-32.36	-	-	357	183	H
3.279944	34.37	ADR	32.9	-25.68	0.41	42	68.2	-26.2	-	-	162	331	V
3.288304	46.11	PK-U	32.9	-25.74	0	53.27	-	-	88.2	-34.93	106	289	H
3.302994	34.5	ADR	32.9	-25.75	0.41	42.06	68.2	-26.14	-	-	106	289	H
3.309479	46.31	PK-U	32.9	-25.71	0	53.5	-	-	88.2	-34.7	162	331	V
13.849178	55.35	PK-U	38.9	-43.67	0	50.58	-	-	88.2	-37.62	357	204	V
13.859804	44.25	ADR	38.9	-43.76	0.41	39.8	68.2	-28.4	-	-	357	204	V
13.874377	56.16	PK-U	38.9	-43.99	0	51.07	-	-	88.2	-37.13	116	146	H
13.883223	44.43	ADR	38.9	-43.93	0.41	39.81	68.2	-28.39	-	-	116	146	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

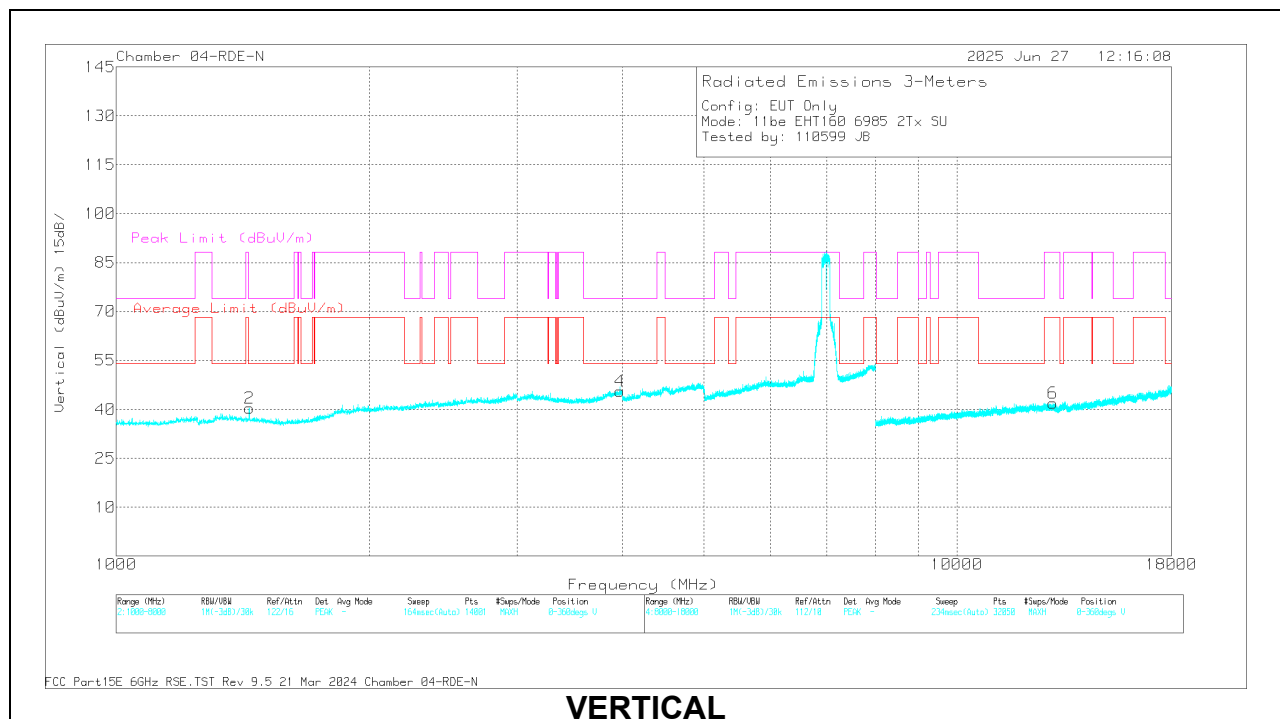
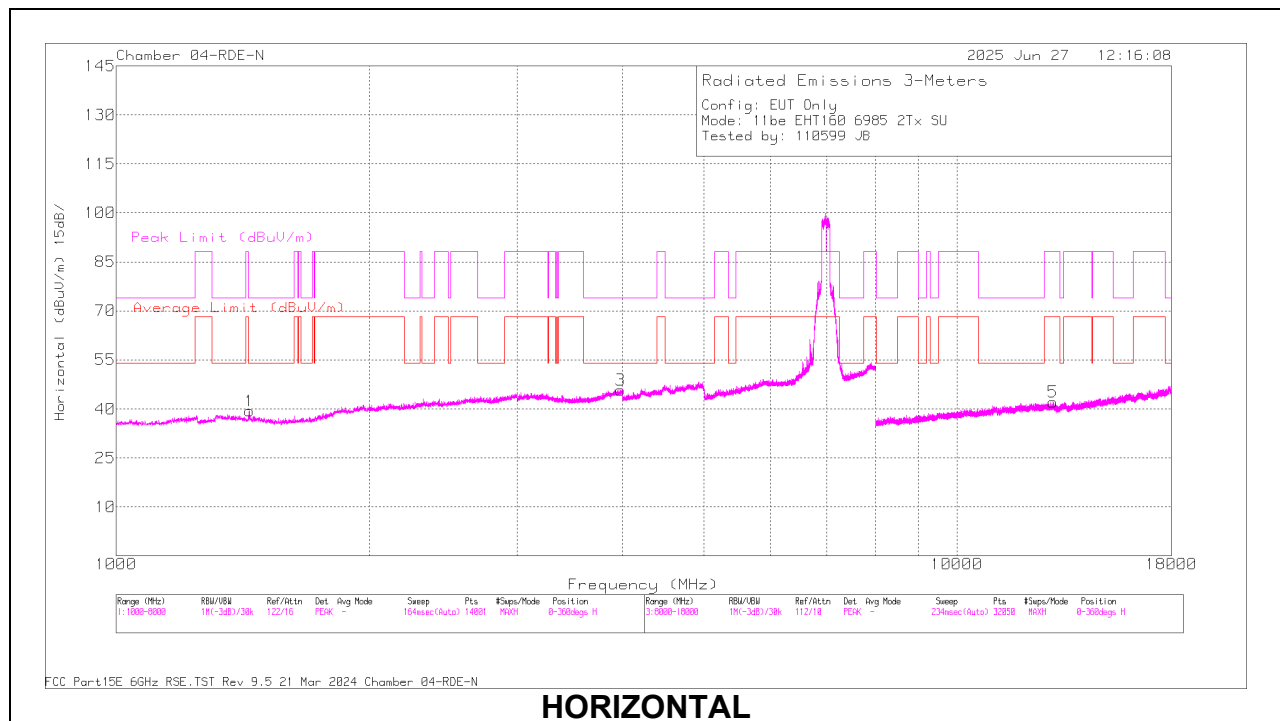
160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6 + 5	* 1.439862	47.32	PK-U	28.5	-27.33	0	48.49	-	-	74	-25.51	326	101	H
			* 1.43999	39.03	ADR	28.5	-27.33	0.61	40.81	54	-13.19	-	-	326	101	H
			* 3.999012	45.9	PK-U	33.8	-25.24	0	54.46	-	-	74	-19.54	27	221	H
			* 3.9978	34.26	ADR	33.8	-25.29	0.61	43.38	54	-10.62	-	-	27	221	H
			* 1.440056	47.6	PK-U	28.5	-27.33	0	48.77	-	-	74	-25.23	152	210	V
			* 1.44005	38.57	ADR	28.5	-27.33	0.61	40.35	54	-13.65	-	-	152	210	V
			* 3.979666	46.26	PK-U	33.9	-25.21	0	54.95	-	-	74	-19.05	120	342	V
			* 3.979992	34.38	ADR	33.9	-25.22	0.61	43.67	54	-10.33	-	-	120	342	V
			13.00709	44.53	ADR	38.9	-43.28	0.61	40.76	68.2	-27.44	-	-	3	253	V
			13.009198	56.28	PK-U	38.9	-43.25	0	51.93	-	-	88.2	-36.27	15	360	H
			13.018802	56.46	PK-U	38.9	-43.4	0	51.96	-	-	88.2	-36.24	3	253	V
			13.023438	44.93	ADR	38.9	-43.42	0.61	41.02	68.2	-27.18	-	-	15	360	H
11be (Partial RU Mode / Highest PSD)	6985 (484+242T Index 90)	6 + 5	* 2.293704	61.12	PK-U	31.9	-50.21	0	42.81	-	-	74	-31.19	189	334	H
			* 2.274701	49.5	ADR	31.8	-50.31	0	30.99	54	-23.01	-	-	189	334	H
			3.594077	58	PK-U	33.8	-47.67	0	44.13	-	-	88.2	-44.07	11	380	H
			* 3.603036	46.41	ADR	33.8	-47.65	0	32.56	54	-21.44	-	-	11	380	H
			* 2.274383	61.89	PK-U	31.8	-50.31	0	43.38	-	-	74	-30.62	284	330	V
			* 2.281004	49.34	ADR	31.8	-50.3	0	30.84	54	-23.16	-	-	284	330	V
			* 3.600055	57.94	PK-U	33.8	-47.68	0	44.06	-	-	74	-29.94	141	268	V
			* 3.600575	46.58	ADR	33.8	-47.69	0	32.69	54	-21.31	-	-	141	268	V
			13.951323	55.21	PK-U	39.1	-43.97	0	50.34	-	-	88.2	-37.86	154	134	H
			13.957531	43.3	ADR	39.1	-43.8	0	38.6	68.2	-29.6	-	-	154	134	H
			13.932639	55.8	PK-U	39	-44.07	0	50.73	-	-	88.2	-37.47	166	253	V
			13.953309	43.71	ADR	39.1	-43.91	0	38.9	68.2	-29.3	-	-	166	253	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6985MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.439862	47.32	PK-U	28.5	0	-27.33	48.49	-	-	74	-25.51	326	101	H
* 1.43999	39.03	ADR	28.5	0.61	-27.33	40.81	54	-13.19	-	-	326	101	H
* 3.999012	45.9	PK-U	33.8	0	-25.24	54.46	-	-	74	-19.54	27	221	H
* 3.9978	34.26	ADR	33.8	0.61	-25.29	43.38	54	-10.62	-	-	27	221	H
* 1.440056	47.6	PK-U	28.5	0	-27.33	48.77	-	-	74	-25.23	152	210	V
* 1.44005	38.57	ADR	28.5	0.61	-27.33	40.35	54	-13.65	-	-	152	210	V
* 3.979666	46.26	PK-U	33.9	0	-25.21	54.95	-	-	74	-19.05	120	342	V
* 3.979992	34.38	ADR	33.9	0.61	-25.22	43.67	54	-10.33	-	-	120	342	V
13.00709	44.53	ADR	38.9	0.61	-43.28	40.76	68.2	-27.44	-	-	3	253	V
13.009198	56.28	PK-U	38.9	0	-43.25	51.93	-	-	88.2	-36.27	15	360	H
13.018802	56.46	PK-U	38.9	0	-43.4	51.96	-	-	88.2	-36.24	3	253	V
13.023438	44.93	ADR	38.9	0.61	-43.42	41.02	68.2	-27.18	-	-	15	360	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

The UNII-5 band was excluded from band-edge testing because its starting frequency lies well inside the band-edge threshold.

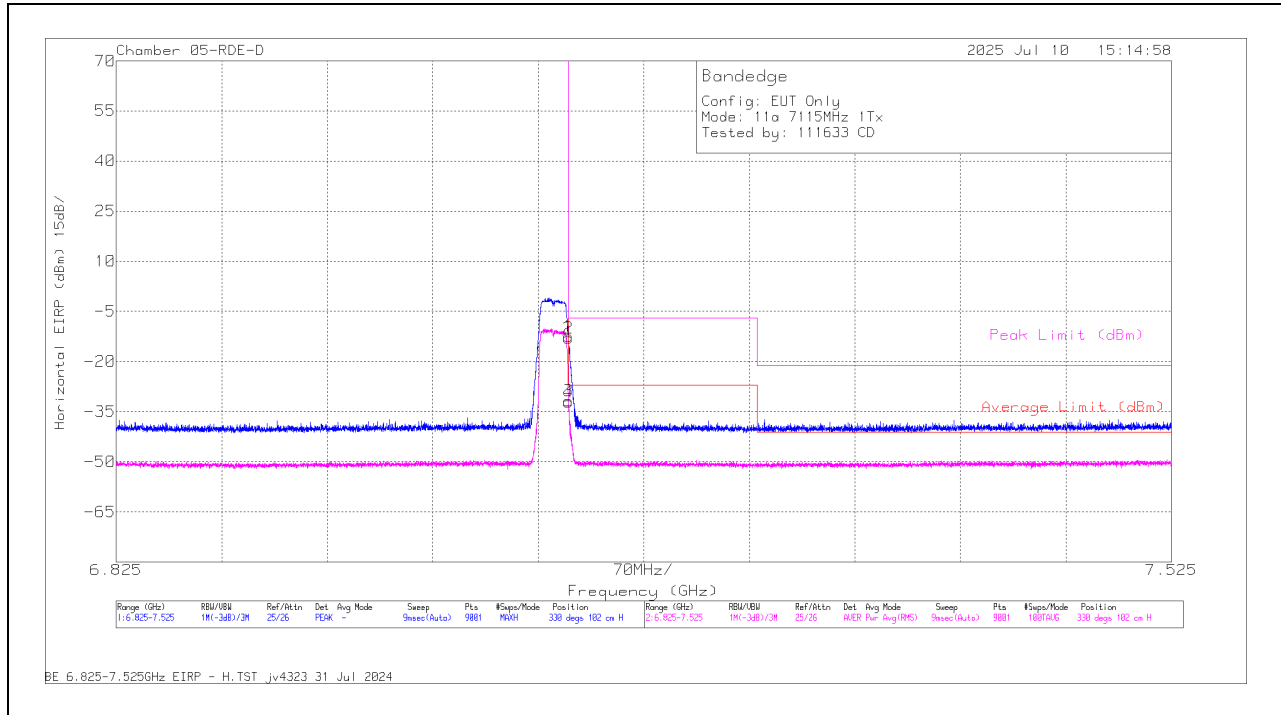
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-22.63	Pk	35.6	11.8	0	-37.18	-12.41	-	-	-7	-5.41	330	102	H
			7.125	-42.02	RMS	35.6	11.8	0	-37.18	-31.8	-27	-4.8	-	-	330	102	H
			7.125068	-23.19	Pk	35.6	11.8	0	-37.18	-12.97	-	-	-7	-5.97	330	102	H
			7.125068	-42.33	RMS	35.6	11.8	0	-37.18	-32.11	-27	-5.11	-	-	330	102	H
			7.125	-33.97	Pk	35.6	11.8	0	-37.18	-23.75	-	-	-7	-16.75	330	102	V
			7.125	-52.78	RMS	35.6	11.8	0	-37.18	-42.56	-27	-15.56	-	-	330	102	V
			* 7.445124	-59.4	RMS	35.6	11.8	0	-37.55	-49.55	-41.2	-8.35	-	-	330	102	V
			* 7.481991	-46.87	Pk	35.6	11.8	0	-37.45	-36.92	-	-	-21.2	-15.72	330	102	V
		5	7.125	-31.51	Pk	35.6	11.8	0	-28.4	-12.51	-	-	-7	-5.51	343	190	H
			7.125	-49.19	RMS	35.6	11.8	0	-28.4	-30.19	-27	-3.19	-	-	343	190	H
			7.125068	-32.73	Pk	35.6	11.8	0	-28.4	-13.73	-	-	-7	-6.73	343	190	H
			7.125145	-51.74	RMS	35.6	11.8	0	-28.4	-32.74	-27	-5.74	-	-	343	190	H
			7.125	-32.04	Pk	35.6	11.8	0	-28.4	-13.04	-	-	-7	-6.04	52	239	V
			7.125	-48.75	RMS	35.6	11.8	0	-28.4	-29.75	-27	-2.75	-	-	52	239	V
			7.125068	-51.93	RMS	35.6	11.8	0	-28.4	-32.93	-27	-5.93	-	-	52	239	V
			7.125145	-32.47	Pk	35.6	11.8	0	-28.4	-13.47	-	-	-7	-6.47	52	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

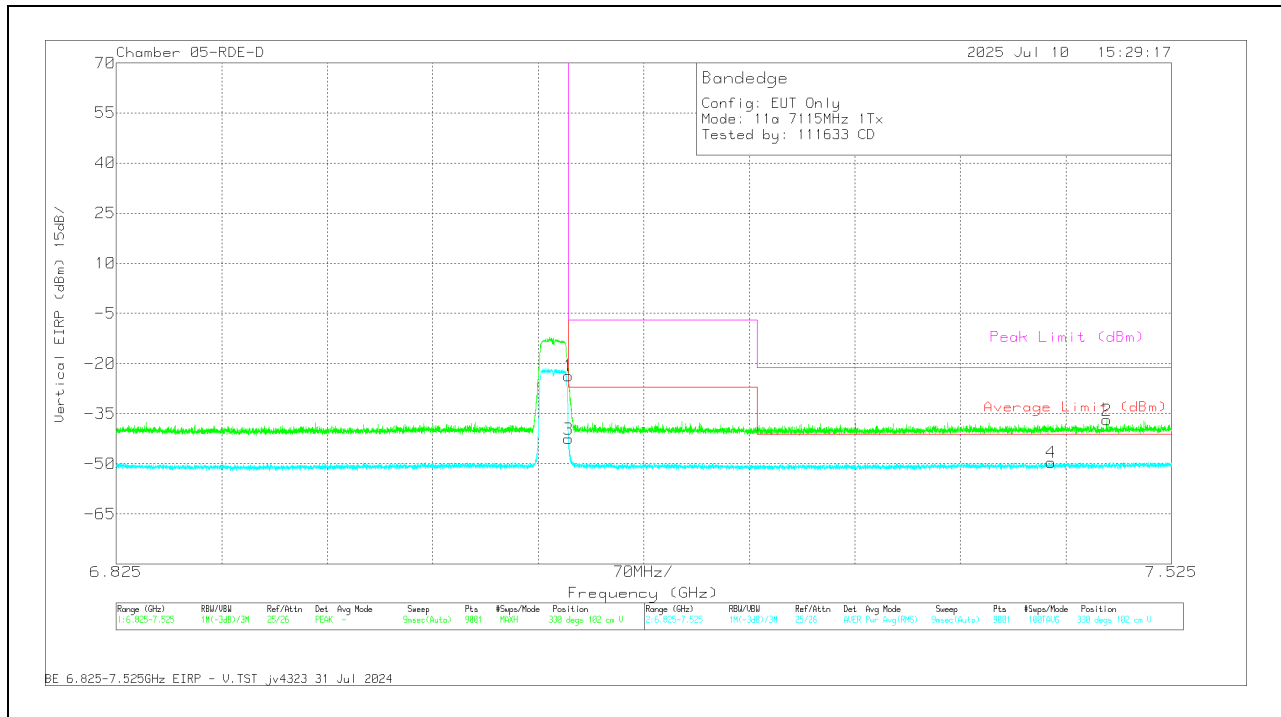
Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE: 11a**BANDEDGE (HIGH CHANNEL / 7115MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.63	Pk	35.6	11.8	0	-37.18	-12.41	-	-	-7	-5.41	330	102	H
3	7.125	-42.02	RMS	35.6	11.8	0	-37.18	-31.8	-27	-4.8	-	-	330	102	H
2	7.125068	-23.19	Pk	35.6	11.8	0	-37.18	-12.97	-	-	-7	-5.97	330	102	H
4	7.125068	-42.33	RMS	35.6	11.8	0	-37.18	-32.11	-27	-5.11	-	-	330	102	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-33.97	Pk	35.6	11.8	0	-37.18	-23.75	-	-	-7	-16.75	330	102	V
3	7.125	-52.78	RMS	35.6	11.8	0	-37.18	-42.56	-27	-15.56	-	-	330	102	V
4	7.445124	-59.4	RMS	35.6	11.8	0	-37.55	-49.55	-41.2	-8.35	-	-	330	102	V
2	7.481991	-46.87	Pk	35.6	11.8	0	-37.45	-36.92	-	-	-21.2	-15.72	330	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

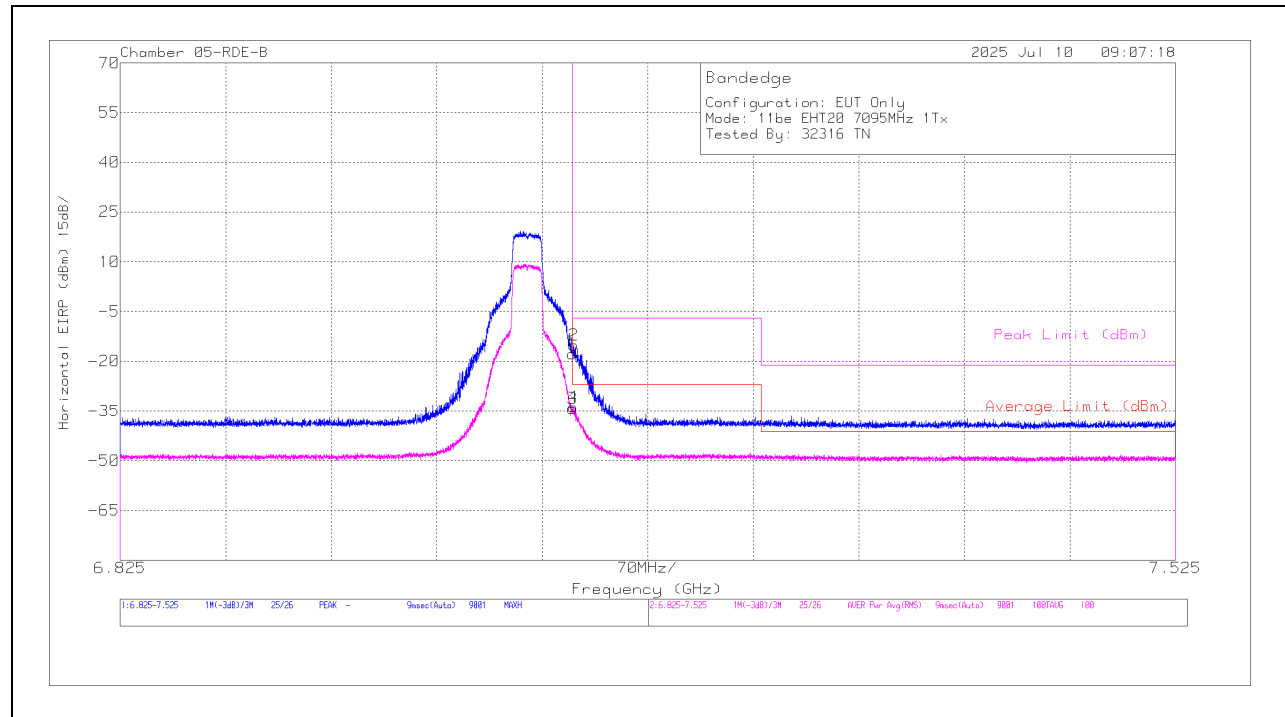
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-28.97	Pk	35.7	11.8	0	-36.34	-17.81	-	-	-7	-10.81	2	115	H
			7.125	-46.2	RMS	35.7	11.8	0.84	-36.34	-34.2	-27	-7.2	-	-	2	115	H
			7.125456	-45.8	RMS	35.7	11.8	0.84	-36.32	-33.78	-27	-6.78	-	-	2	115	H
			7.126001	-26.36	Pk	35.7	11.8	0	-36.29	-15.15	-	-	-7	-8.15	2	115	H
			7.125	-37.26	Pk	35.7	11.8	0	-36.34	-26.1	-	-	-7	-19.1	340	109	V
			7.125	-54.65	RMS	35.7	11.8	0.84	-36.34	-42.65	-27	-15.65	-	-	340	109	V
		5	* 7.252701	-60.45	RMS	35.7	11.8	0.84	-36.09	-48.2	-41.2	-7	-	-	340	109	V
			* 7.471024	-47.84	Pk	35.7	11.8	0	-36.32	-36.66	-	-	-21.2	-15.46	340	109	V
			* 7.522046	-47.94	Pk	35.6	11.8	0	-36.3	-36.84	-	-	-21.2	-15.64	86	111	H
			* 7.499491	-59.92	RMS	35.6	11.8	0.84	-36.45	-48.13	-41.2	-6.93	-	-	86	111	H
			7.125	-48.75	Pk	35.5	11.8	0	-36.5	-37.95	-	-	-7	-30.95	86	111	H
			7.125	-61.23	RMS	35.5	11.8	0.84	-36.5	-49.59	-27	-22.59	-	-	86	111	H
		5	* 7.260635	-48.02	Pk	35.5	11.8	0	-36.5	-37.22	-	-	-21.2	-16.02	152	147	V
			* 7.524769	-60.09	RMS	35.6	11.8	0.84	-36.3	-48.15	-41.2	-6.95	-	-	152	147	V
			7.125	-47.13	Pk	35.5	11.8	0	-36.5	-36.33	-	-	-7	-29.33	152	147	V
			7.125	-60.07	RMS	35.5	11.8	0.84	-36.5	-48.43	-27	-21.43	-	-	152	147	V
EHT40 (SU Mode)	7085	6	7.125	-29.29	Pk	35.8	11.8	0	-35.42	-17.11	-	-	-7	-10.11	173	109	H
			7.125	-43.15	RMS	35.8	11.8	0.97	-35.42	-30	-27	-3	-	-	173	109	H
			7.125534	-42.84	RMS	35.8	11.8	0.97	-35.45	-29.72	-27	-2.72	-	-	173	109	H
			7.126312	-25.85	Pk	35.8	11.8	0	-35.48	-13.73	-	-	-7	-6.73	173	109	H
			* 7.501202	-47.76	Pk	35.8	11.8	0	-36.31	-36.47	-	-	-21.2	-15.27	151	102	V
			* 7.501046	-59.87	RMS	35.8	11.8	0.97	-36.32	-47.62	-41.2	-6.42	-	-	151	102	V
		5	7.125	-40.64	Pk	35.8	11.8	0	-35.42	-28.46	-	-	-7	-21.46	151	102	V
			7.125	-55.32	RMS	35.8	11.8	0.97	-35.42	-42.17	-27	-15.17	-	-	151	102	V
			7.125	-40.44	Pk	35.7	11.8	0	-37.13	-30.07	-	-	-7	-23.07	291	137	H
			* 7.25099	-48.16	Pk	35.6	11.8	0	-36.88	-37.64	-	-	-21.2	-16.44	291	137	H
			7.125	-57.02	RMS	35.7	11.8	0.97	-37.13	-45.68	-27	-18.68	-	-	291	137	H
			* 7.52018	-59.8	RMS	35.6	11.8	0.97	-36.95	-48.38	-41.2	-7.18	-	-	291	137	H
		5	7.125	-39.03	Pk	35.7	11.8	0	-37.13	-28.66	-	-	-7	-21.66	339	133	V
			* 7.518391	-47.72	Pk	35.6	11.8	0	-36.95	-37.27	-	-	-21.2	-16.07	339	133	V
			7.125	-55.82	RMS	35.7	11.8	0.97	-37.13	-44.48	-27	-17.48	-	-	339	133	V
			* 7.492569	-59.71	RMS	35.6	11.8	0.97	-37.08	-48.42	-41.2	-7.22	-	-	339	133	V
EHT80 (SU Mode)	7025	6	7.125	-42.31	Pk	35.5	11.8	0	-21.98	-16.99	-	-	-7	-9.99	78	225	H
			7.125	-58.55	RMS	35.5	11.8	1.07	-21.98	-32.16	-27	-5.16	-	-	78	225	H
			7.125068	-58.13	RMS	35.5	11.8	1.07	-21.97	-31.73	-27	-4.73	-	-	78	225	H
			7.128101	-41.45	Pk	35.5	11.8	0	-21.86	-16.01	-	-	-7	-9.01	78	225	H
			* 7.520724	-75.64	RMS	35.5	11.8	1.07	-21.17	-48.44	-41.2	-7.24	-	-	76	191	V
			7.125	-49.61	Pk	35.5	11.8	0	-21.98	-24.29	-	-	-7	-17.29	76	191	V
		5	7.125	-64.82	RMS	35.5	11.8	1.07	-21.98	-38.43	-27	-11.43	-	-	76	191	V
			7.12569	-47.99	Pk	35.5	11.8	0	-21.88	-22.57	-	-	-7	-15.57	76	191	V
			* 7.49708	-47.59	Pk	35.8	11.8	0	-36.41	-36.4	-	-	-21.2	-15.2	112	197	H
			* 7.503069	-59.96	RMS	35.8	11.8	1.07	-36.26	-47.55	-41.2	-6.35	-	-	112	197	H
			7.125	-46.85	Pk	35.8	11.8	0	-35.42	-34.67	-	-	-7	-27.67	112	197	H
			7.125	-58.71	RMS	35.8	11.8	1.07	-35.42	-45.46	-27	-18.46	-	-	112	197	H
		5	* 7.27689	-48.24	Pk	35.6	11.8	0	-35.86	-36.7	-	-	-21.2	-15.5	195	233	V
			* 7.322157	-59.97	RMS	35.6	11.8	1.07	-36.07	-47.57	-41.2	-6.37	-	-	195	233	V
			7.125	-44.56	Pk	35.8	11.8	0	-35.42	-32.38	-	-	-7	-25.38	195	233	V
			7.125	-57.19	RMS	35.8	11.8	1.07	-35.42	-43.94	-27	-16.94	-	-	195	233	V
EHT160 (SU Mode)	6985	6	7.125	-31.37	Pk	35.8	11.8	0	-35.7	-19.47	-	-	-7	-12.47	3	127	H
			7.125	-45.03	RMS	35.8	11.8	1.16	-35.7	-31.97	-27	-4.97	-	-	3	127	H
			7.12709	-43.09	RMS	35.8	11.8	1.16	-35.6	-29.93	-27	-2.93	-	-	3	127	H
			7.141868	-25.56	Pk	35.8	11.8	0	-35.5	-13.46	-	-	-7	-6.46	3	127	H
			* 7.497157	-47.73	Pk	35.9	11.8	0	-35.7	-35.73	-	-	-21.2	-14.53	339	102	V
			* 7.262035	-60.84	RMS	35.8	11.8	1.16	-35.2	-47.28	-41.2	-6.08	-	-	339	102	V
		5	7.125	-41.2	Pk	35.8	11.8	0	-35.7	-29.3	-	-	-7	-22.3	339	102	V
			7.125	-54.96	RMS	35.8	11.8	1.16	-35.7	-41.9	-27	-14.9	-	-	339	102	V
			* 7.422802	-54.84	Pk	35.6	11.8	0	-28	-35.44	-	-	-21.2	-14.24	294	126	H
			* 7.502602	-66.87	RMS	35.6	11.8	1.16	-27.9	-46.21	-41.2	-5.01	-	-	294	126	H
			7.125	-51.04	Pk	35.6	11.8	0	-28.4	-32.04	-	-	-7	-25.04	294	126	H
			7.125	-63.25	RMS	35.6	11.8	1.16	-28.4	-43.09	-27	-16.09	-	-	294	126	H
		5	* 7.492257	-55.2	Pk	35.6	11.8	0	-27.9	-35.7	-	-	-21.2	-14.5	4	236	V
			* 7.506102	-66.74	RMS	35.6	11.8	1.16	-28	-46.18	-41.2	-4.98	-	-	4	236	V
			7.125	-50.91	Pk	35.6	11.8	0	-28.4	-31.91	-	-	-7	-24.91	4	236	V
			7.125	-63.08	RMS	35.6	11.8	1.16	-28.4	-42.92	-27	-15.92	-	-	4	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

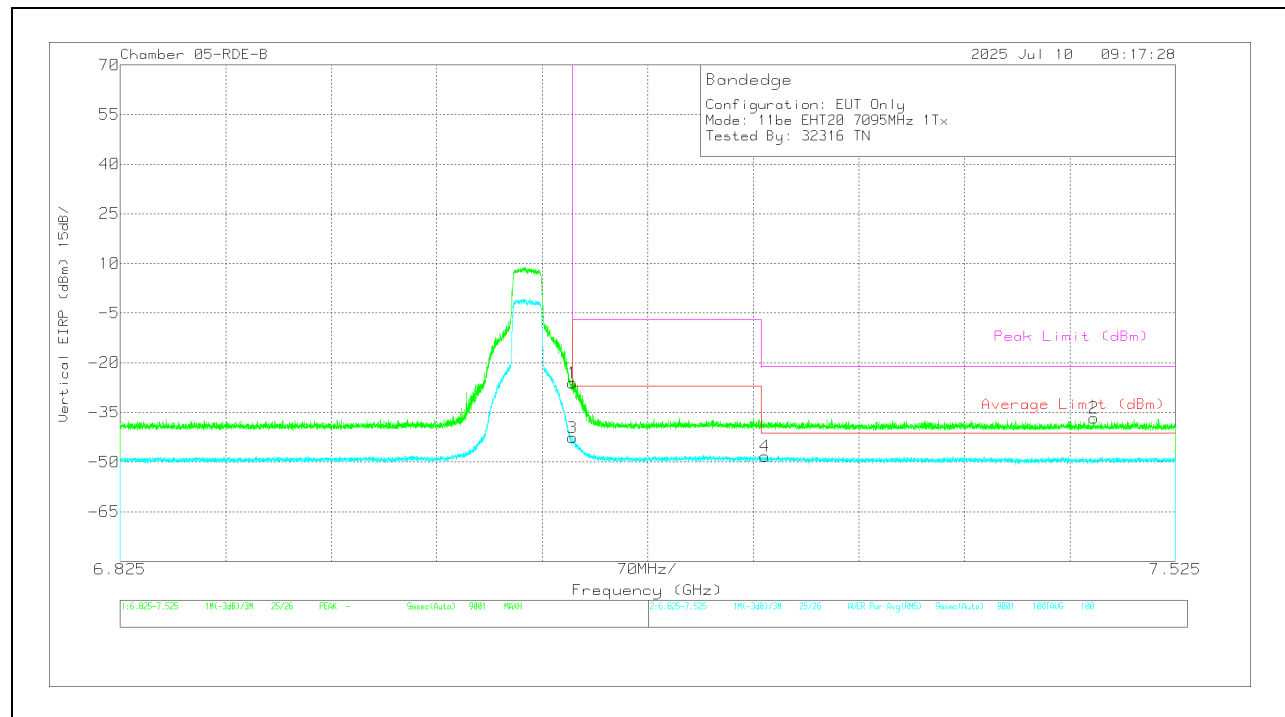
1TX Antenna 6 MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.97	Pk	35.7	11.8	0	-36.34	-17.81	-	-	-7	-10.81	2	115	H
3	7.125	-46.2	RMS	35.7	11.8	.84	-36.34	-34.2	-27	-7.2	-	-	2	115	H
4	7.125456	-45.8	RMS	35.7	11.8	.84	-36.32	-33.78	-27	-6.78	-	-	2	115	H
2	7.126001	-26.36	Pk	35.7	11.8	0	-36.29	-15.15	-	-	-7	-8.15	2	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-37.26	Pk	35.7	11.8	0	-36.34	-26.1	-	-	-7	-19.1	340	109	V
3	7.125	-54.65	RMS	35.7	11.8	.84	-36.34	-42.65	-27	-15.65	-	-	340	109	V
4	7.252701	-60.45	RMS	35.7	11.8	.84	-36.09	-48.2	-41.2	-7	-	-	340	109	V
2	7.471024	-47.84	Pk	35.7	11.8	0	-36.32	-36.66	-	-	-21.2	-15.46	340	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

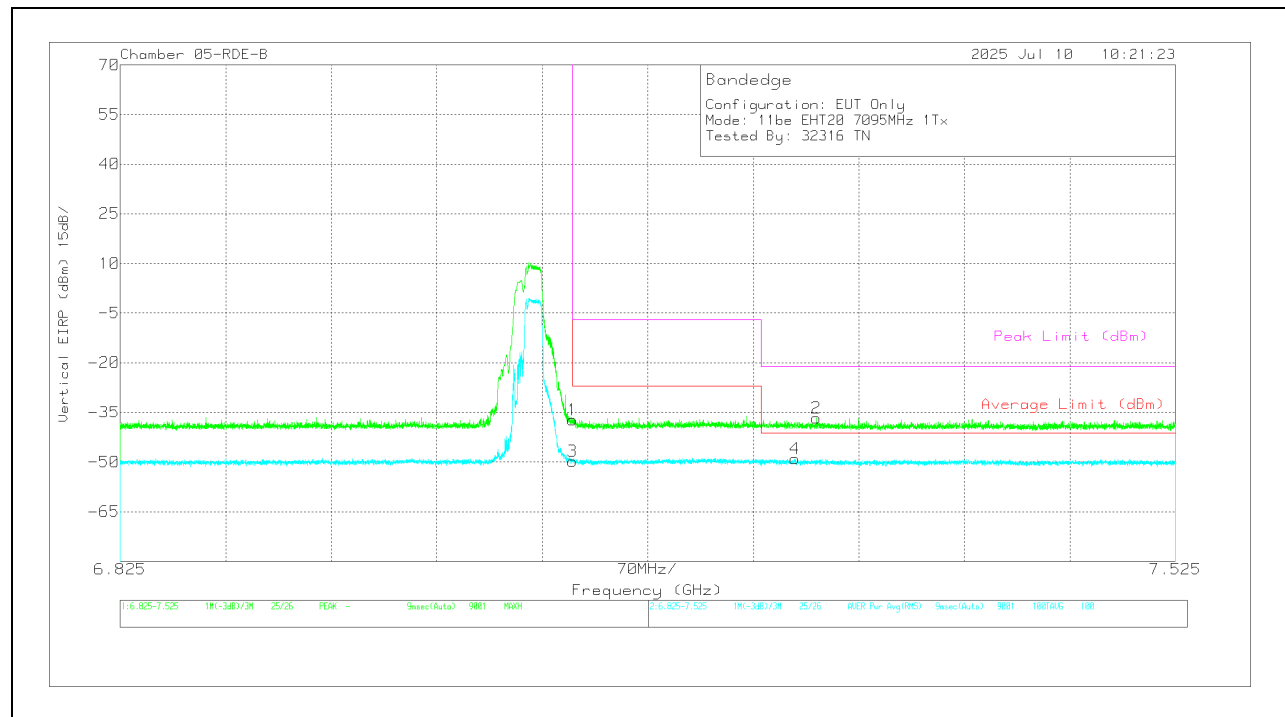
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106+26 / Index 83)	7095	6	7.125	-40.18	Pk	35.7	11.8	0	-36.34	-29.02	-	-	-7	-22.02	333	103	H
			7.125	-57.82	RMS	35.7	11.8	0	-36.34	-46.66	-27	-19.66	-	-	333	103	H
			* 7.267323	-60.41	RMS	35.7	11.8	0	-36.08	-48.99	-41.2	-7.79	-	-	333	103	H
			* 7.350002	-47.55	Pk	35.6	11.8	0	-36.28	-36.43	-	-	-21.2	-15.23	333	103	H
			7.125	-48.45	Pk	35.7	11.8	0	-36.34	-37.29	-	-	-7	-30.29	344	105	V
			7.125	-60.88	RMS	35.7	11.8	0	-36.34	-49.72	-27	-22.72	-	-	344	105	V
		5	* 7.272535	-60.55	RMS	35.7	11.8	0	-36.01	-49.06	-41.2	-7.86	-	-	344	105	V
			* 7.286924	-48.05	Pk	35.7	11.8	0	-36.21	-36.76	-	-	-21.2	-15.56	344	105	V
			7.125	-50.94	Pk	35.7	11.8	0	-34.4	-37.84	-	-	-7	-30.84	264	207	H
			* 7.51318	-49.78	Pk	35.6	11.8	0	-33.32	-35.7	-	-	-21.2	-14.5	264	207	H
			7.125	-62.33	RMS	35.7	11.8	0	-34.4	-49.23	-27	-22.23	-	-	264	207	H
			* 7.50478	-61.44	RMS	35.6	11.8	0	-33.38	-47.42	-41.2	-6.22	-	-	264	207	H
		4	7.125	-52.06	Pk	35.7	11.8	0	-34.4	-38.96	-	-	-7	-31.96	303	119	V
			* 7.498169	-49.04	Pk	35.6	11.8	0	-33.3	-34.94	-	-	-21.2	-13.74	303	119	V
			7.125	-62.2	RMS	35.7	11.8	0	-34.4	-49.1	-27	-22.1	-	-	303	119	V
			* 7.498169	-61.66	RMS	35.6	11.8	0	-33.3	-47.56	-41.2	-6.36	-	-	303	119	V
EHT40 (RU 106+26 / Index 85)	7085	6	7.125	-42.48	Pk	35.5	11.8	0	-21.98	-17.16	-	-	-7	-10.16	145	106	H
			7.125	-58.02	RMS	35.5	11.8	0	-21.98	-32.7	-27	-5.7	-	-	145	106	H
			7.125145	-57.79	RMS	35.5	11.8	0	-21.96	-32.45	-27	-5.45	-	-	145	106	H
			7.132612	-39.83	Pk	35.4	11.8	0	-21.93	-14.56	-	-	-7	-7.56	145	106	H
			* 7.462002	-63.53	Pk	35.5	11.8	0	-21.31	-37.54	-	-	-21.2	-16.34	104	101	V
			* 7.490313	-75.65	RMS	35.4	11.8	0	-21.24	-49.69	-41.2	-8.49	-	-	104	101	V
		5	7.125	-54.8	Pk	35.5	11.8	0	-21.98	-29.48	-	-	-7	-22.48	104	101	V
			7.125	-69.39	RMS	35.5	11.8	0	-21.98	-44.07	-27	-17.07	-	-	104	101	V
			7.125	-50.62	Pk	35.7	11.8	0	-37.13	-40.25	-	-	-7	-33.25	291	137	H
			* 7.30139	-48.19	Pk	35.7	11.8	0	-36.96	-37.65	-	-	-21.2	-16.45	291	137	H
			7.125	-61.38	RMS	35.7	11.8	0	-37.13	-51.01	-27	-24.01	-	-	291	137	H
			* 7.522824	-59.58	RMS	35.6	11.8	0	-36.98	-49.16	-41.2	-7.96	-	-	291	137	H
		4	7.125	-49.84	Pk	35.7	11.8	0	-37.13	-39.47	-	-	-7	-32.47	339	133	V
			* 7.306135	-47.08	Pk	35.6	11.8	0	-36.98	-36.66	-	-	-21.2	-15.46	339	133	V
			7.125	-60.95	RMS	35.7	11.8	0	-37.13	-50.58	-27	-23.58	-	-	339	133	V
			* 7.443724	-59.74	RMS	35.6	11.8	0	-37.19	-49.53	-41.2	-8.33	-	-	339	133	V
EHT80 (RU 106+26 / Index 89)	7025	6	* 7.508435	-48.25	Pk	35.4	11.8	0	-34.5	-35.55	-	-	-21.2	-14.35	358	296	H
			* 7.455702	-60.43	RMS	35.5	11.8	0.11	-34.26	-47.28	-41.2	-6.08	-	-	358	296	H
			7.125	-49.57	Pk	35.5	11.8	0	-34.6	-36.87	-	-	-7	-29.87	358	296	H
			7.125	-61	RMS	35.5	11.8	0.11	-34.6	-48.19	-27	-21.19	-	-	358	296	H
			* 7.48448	-48.53	Pk	35.4	11.8	0	-34.45	-35.78	-	-	-21.2	-14.58	87	127	V
			* 7.47398	-60.24	RMS	35.4	11.8	0.11	-34.29	-47.22	-41.2	-6.02	-	-	87	127	V
		5	7.125	-50.44	Pk	35.5	11.8	0	-34.6	-37.74	-	-	-7	-30.74	87	127	V
			7.125	-61.68	RMS	35.5	11.8	0.11	-34.6	-48.87	-27	-21.87	-	-	87	127	V
			7.125	-49.55	Pk	35.7	11.8	0	-36.34	-38.39	-	-	-7	-31.39	174	194	H
			7.125	-61.16	RMS	35.7	11.8	0.11	-36.34	-49.89	-27	-22.89	-	-	174	194	H
			* 7.269657	-60.45	RMS	35.7	11.8	0.11	-36.03	-48.87	-41.2	-7.67	-	-	174	194	H
			* 7.422024	-47.81	Pk	35.6	11.8	0	-36.27	-36.68	-	-	-21.2	-15.48	174	194	H
		4	7.125	-51.25	Pk	35.7	11.8	0	-36.34	-40.09	-	-	-7	-33.09	192	203	V
			7.125	-60.83	RMS	35.7	11.8	0.11	-36.34	-49.56	-27	-22.56	-	-	192	203	V
			7.262812	-60.27	RMS	35.7	11.8	0.11	-36.17	-48.83	-41.2	-7.63	-	-	192	203	V
			7.278057	-48.21	Pk	35.7	11.8	0	-36.13	-36.84	-	-	-21.2	-15.64	192	203	V
EHT160 (RU 52 / Index S52)	6985	6	* 7.382435	-46.78	Pk	35.4	11.8	0	-34.61	-34.19	-	-	-21.2	-12.99	75	225	H
			* 7.486035	-60.29	RMS	35.5	11.8	0	-34.37	-47.36	-41.2	-6.16	-	-	75	225	H
			7.125	-50.38	Pk	35.5	11.8	0	-34.6	-37.68	-	-	-7	-30.68	75	225	H
			7.125	-61.92	RMS	35.5	11.8	0	-34.6	-49.22	-27	-22.22	-	-	75	225	H
			* 7.471491	-48.02	Pk	35.4	11.8	0	-34.26	-35.08	-	-	-21.2	-13.88	43	129	V
			* 7.47818	-60.33	RMS	35.4	11.8	0	-34.26	-47.39	-41.2	-6.19	-	-	43	129	V
		5	7.125	-51.24	Pk	35.5	11.8	0	-34.6	-38.54	-	-	-7	-31.54	43	129	V
			7.125	-61.84	RMS	35.5	11.8	0	-34.6	-49.14	-27	-22.14	-	-	43	129	V
			7.125	-50.78	Pk	35.7	11.8	0	-37.13	-40.41	-	-	-7	-33.41	351	196	H
			* 7.471491	-48	Pk	35.6	11.8	0	-37.11	-37.71	-	-	-21.2	-16.51	351	196	H
			7.125	-61.17	RMS	35.7	11.8	0	-37.13	-50.8	-27	-23.8	-	-	351	196	H
			* 7.259546	-59.76	RMS	35.6	11.8	0	-36.89	-49.25	-41.2	-8.05	-	-	351	196	H
		4	7.125	-49.71	Pk	35.7	11.8	0	-37.13	-39.34	-	-	-7	-32.34	65	304	V
			* 7.353735	-47.54	Pk	35.6	11.8	0	-37	-37.14	-	-	-21.2	-15.94	65	304	V
			7.125	-61.11	RMS	35.7	11.8	0	-37.13	-50.74	-27	-23.74	-	-	65	304	V
			* 7.273001	-60.01	RMS	35.7	11.8	0	-36.82	-49.33	-41.2	-8.13	-	-	65	304	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-48.45	PK	35.7	11.8	0	-36.34	-37.29	-	-	-7	-30.29	344	105	V
3	7.125	-60.88	RMS	35.7	11.8	0	-36.34	-49.72	-27	-22.72	-	-	344	105	V
4	7.272535	-60.55	RMS	35.7	11.8	0	-36.01	-49.06	-41.2	-7.86	-	-	344	105	V
2	7.286924	-48.05	PK	35.7	11.8	0	-36.21	-36.76	-	-	-21.2	-15.56	344	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-22.81	Pk	35.7	11.8	0	-37.13	-12.44	-	-	-7	-5.44	349	105	H
			7.125223	-23.16	Pk	35.7	11.8	0	-37.12	-12.78	-	-	-7	-5.78	349	105	H
			7.125	-40.25	RMS	35.7	11.8	0	-37.13	-29.88	-27	-2.88	-	-	349	105	H
			7.125145	-42.38	RMS	35.7	11.8	0	-37.13	-32.01	-27	-5.01	-	-	349	105	H
			7.125	-34.17	Pk	35.7	11.8	0	-37.13	-23.8	-	-	-7	-16.8	320	246	V
			* 7.338801	-48.04	Pk	35.6	11.8	0	-36.97	-37.61	-	-	-21.2	-16.41	320	246	V
			7.125	-52.89	RMS	35.7	11.8	0	-37.13	-42.52	-27	-15.52	-	-	320	246	V
			* 7.453057	-59.66	RMS	35.6	11.8	0	-37.12	-49.38	-41.2	-8.18	-	-	320	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

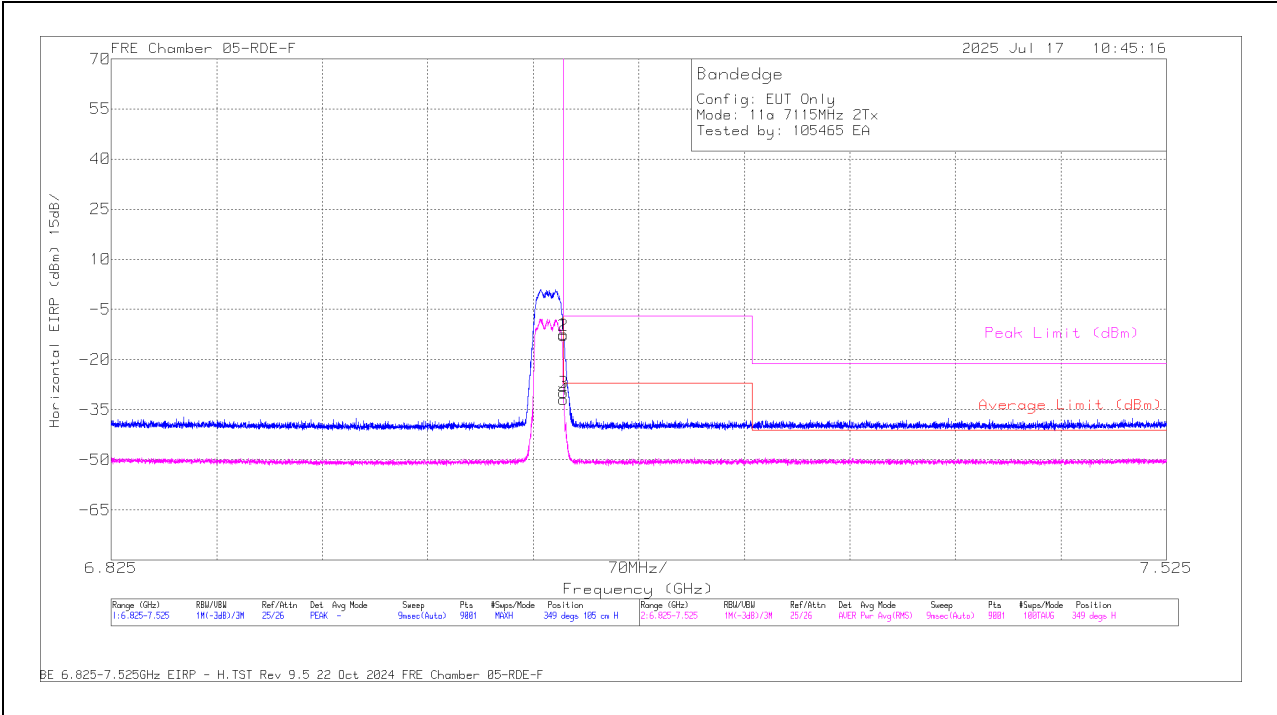
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6+5 MODE: 11a

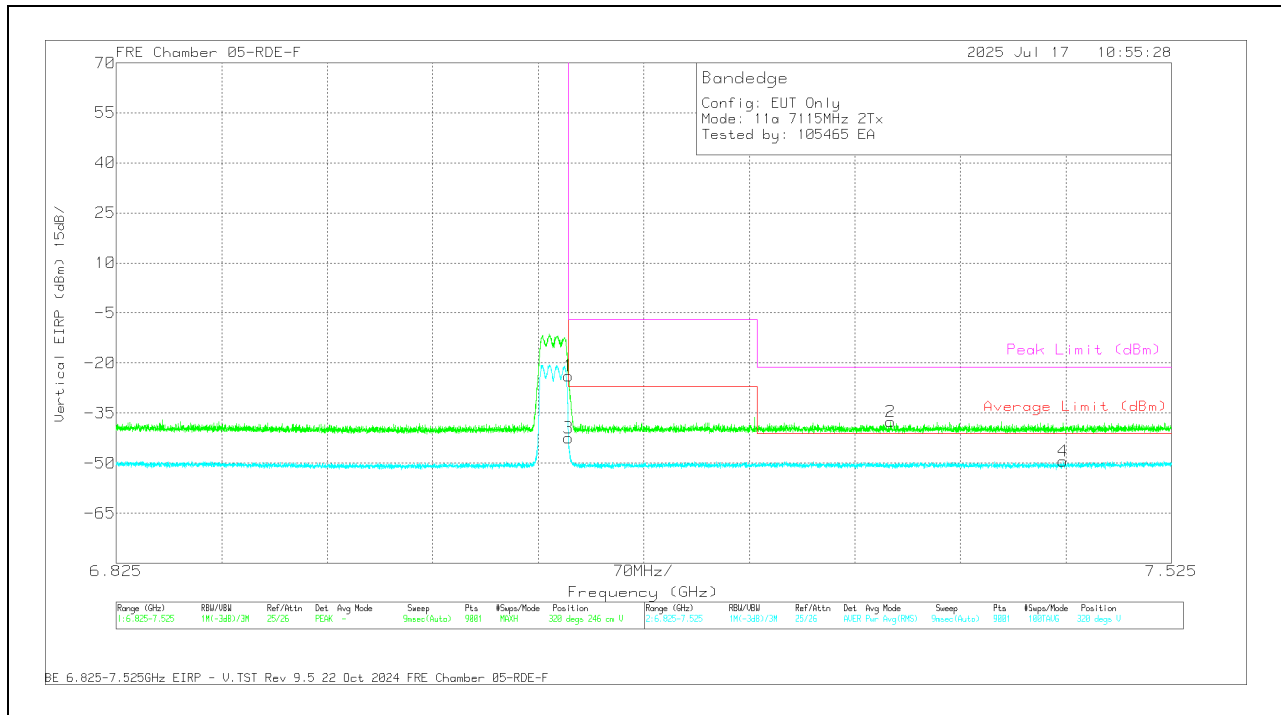
BANDEDGE (HIGH CHANNEL / 7115MHz)

HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.81	Pk	35.7	11.8	0	-37.13	-12.44	-	-	-7	-5.44	349	105	H
2	7.125223	-23.16	Pk	35.7	11.8	0	-37.12	-12.78	-	-	-7	-5.78	349	105	H
3	7.125	-40.25	RMS	35.7	11.8	0	-37.13	-29.88	-27	-2.88	-	-	349	105	H
4	7.125145	-42.38	RMS	35.7	11.8	0	-37.13	-32.01	-27	-5.01	-	-	349	105	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-34.17	Pk	35.7	11.8	0	-37.13	-23.8	-	-	-7	-16.8	320	246	V
2	* 7.338801	-48.04	Pk	35.6	11.8	0	-36.97	-37.61	-	-	-21.2	-16.41	320	246	V
3	7.125	-52.89	RMS	35.7	11.8	0	-37.13	-42.52	-27	-15.52	-	-	320	246	V
4	* 7.453057	-59.66	RMS	35.6	11.8	0	-37.12	-49.38	-41.2	-8.18	-	-	320	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

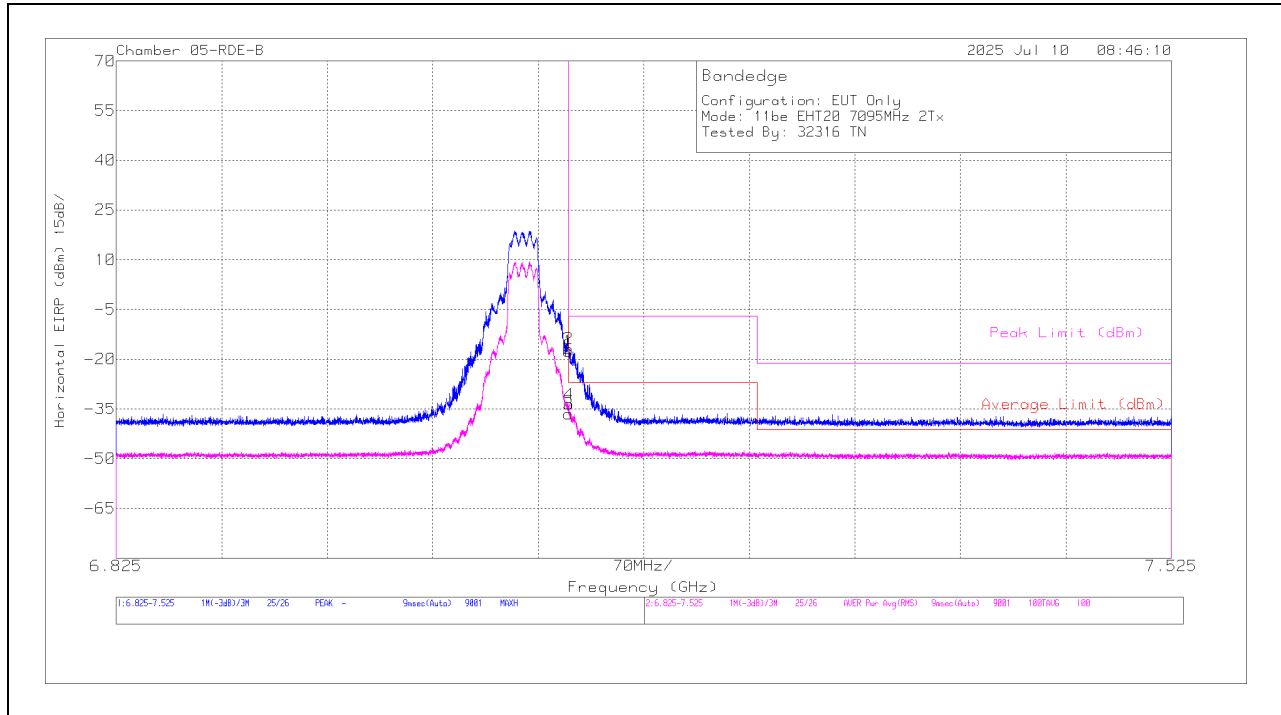
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-28.71	Pk	35.7	11.8	0	-36.34	-17.55	-	-	-7	-10.55	324	245	H
			7.125	-48.53	RMS	35.7	11.8	0.84	-36.34	-36.53	-27	-9.53	-	-	324	245	H
			7.125068	-27.95	Pk	35.7	11.8	0	-36.34	-16.79	-	-	-7	-9.79	324	245	H
			7.125301	-45.6	RMS	35.7	11.8	0.84	-36.32	-33.58	-27	-6.58	-	-	324	245	H
			7.125	-38.71	Pk	35.7	11.8	0	-36.34	-27.55	-	-	-7	-20.55	51	188	V
			7.125	-56.2	RMS	35.7	11.8	0.84	-36.34	-44.2	-27	-17.2	-	-	51	188	V
			* 7.258457	-60.5	RMS	35.7	11.8	0.84	-36.14	-48.3	-41.2	-7.1	-	-	51	188	V
			* 7.505402	-48.32	Pk	35.7	11.8	0	-36.21	-37.03	-	-	-21.2	-15.83	51	188	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-42.29	Pk	35.5	11.8	0	-21.98	-16.97	-	-	-7	-9.97	199	107	H
			7.125	-56.14	RMS	35.5	11.8	0.97	-21.98	-29.85	-27	-2.85	-	-	199	107	H
			7.125145	-55.87	RMS	35.5	11.8	0.97	-21.96	-29.56	-27	-2.56	-	-	199	107	H
			7.127868	-40.03	Pk	35.5	11.8	0	-21.85	-14.58	-	-	-7	-7.58	199	107	H
			* 7.456868	-75.52	RMS	35.5	11.8	0.97	-21.23	-48.48	-41.2	-7.28	-	-	155	117	V
			7.125	-48.63	Pk	35.5	11.8	0	-21.98	-23.31	-	-	-7	-16.31	155	117	V
			7.125	-64.41	RMS	35.5	11.8	0.97	-21.98	-38.12	-27	-11.12	-	-	155	117	V
			7.12569	-48.52	Pk	35.5	11.8	0	-21.88	-23.1	-	-	-7	-16.1	155	117	V
EHT80 (SU Mode)	7025	6 + 5	7.125	-43.05	Pk	35.5	11.8	0	-21.98	-17.73	-	-	-7	-10.73	134	112	H
			7.125	-57.06	RMS	35.5	11.8	1.07	-21.98	-30.67	-27	-3.67	-	-	134	112	H
			7.125068	-56.81	RMS	35.5	11.8	1.07	-21.97	-30.41	-27	-3.41	-	-	134	112	H
			7.129345	-39.83	Pk	35.5	11.8	0	-21.85	-14.38	-	-	-7	-7.38	134	112	H
			* 7.481057	-75.43	RMS	35.4	11.8	1.07	-21.17	-48.33	-41.2	-7.13	-	-	150	116	V
			7.125	-51.44	Pk	35.5	11.8	0	-21.98	-26.12	-	-	-7	-19.12	150	116	V
			7.125	-65.15	RMS	35.5	11.8	1.07	-21.98	-38.76	-27	-11.76	-	-	150	116	V
			7.131056	-47.75	Pk	35.4	11.8	0	-21.88	-22.43	-	-	-7	-15.43	150	116	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-32.88	Pk	35.5	11.8	0	-34.6	-20.18	-	-	-7	-13.18	356	125	H
			7.125	-46.06	RMS	35.5	11.8	1.16	-34.6	-32.2	-27	-5.2	-	-	356	125	H
			7.129034	-43.69	RMS	35.5	11.8	1.16	-34.5	-29.73	-27	-2.73	-	-	356	125	H
			7.139145	-28.68	Pk	35.4	11.8	0	-34.67	-16.15	-	-	-7	-9.15	356	125	H
			* 7.415957	-48.14	Pk	35.3	11.8	0	-34.46	-35.5	-	-	-21.2	-14.3	66	305	V
			* 7.480902	-59.96	RMS	35.4	11.8	1.16	-34.36	-45.96	-41.2	-4.76	-	-	66	305	V
			7.125	-47.08	Pk	35.5	11.8	0	-34.6	-34.38	-	-	-7	-27.38	66	305	V
			7.125	-59.62	RMS	35.5	11.8	1.16	-34.6	-45.76	-27	-18.76	-	-	66	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

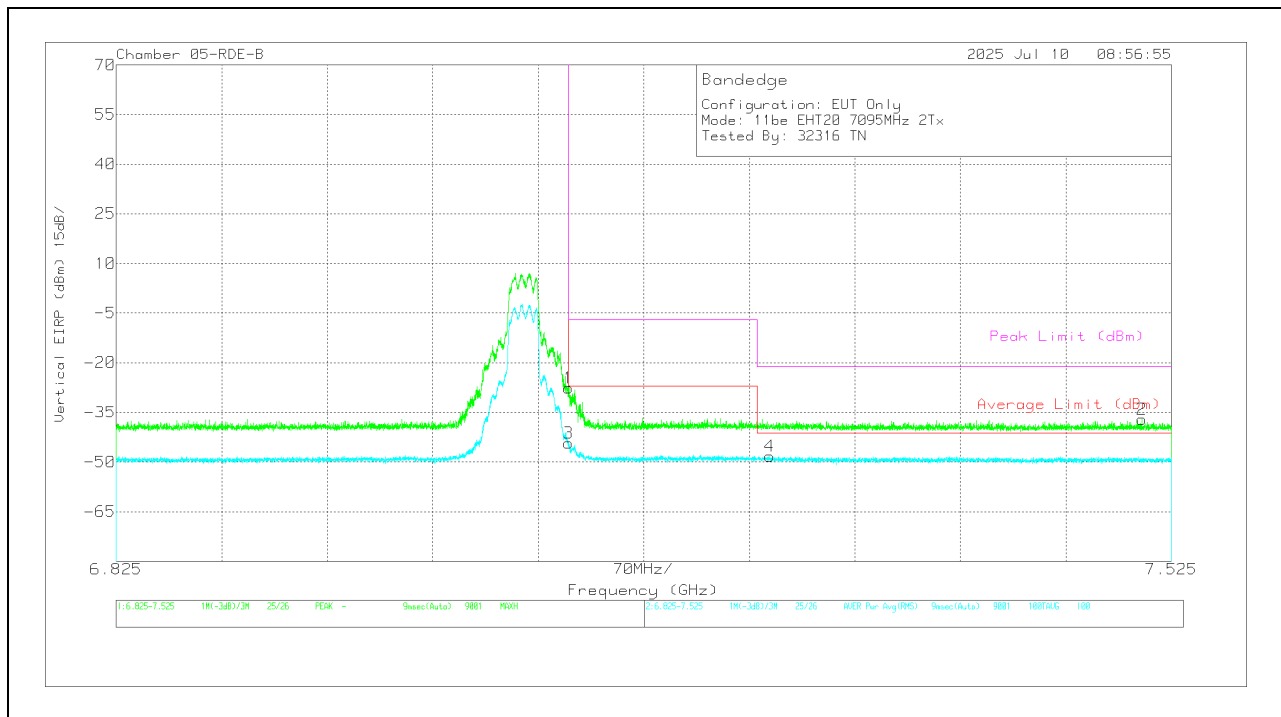
Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.71	Pk	35.7	11.8	0	-36.34	-17.55	-	-	-7	-10.55	324	245	H
3	7.125	-48.53	RMS	35.7	11.8	.84	-36.34	-36.53	-27	-9.53	-	-	324	245	H
2	7.125068	-27.95	Pk	35.7	11.8	0	-36.34	-16.79	-	-	-7	-9.79	324	245	H
4	7.125301	-45.6	RMS	35.7	11.8	.84	-36.32	-33.58	-27	-6.58	-	-	324	245	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-38.71	PK	35.7	11.8	0	-36.34	-27.55	-	-	-7	-20.55	51	188	V
3	7.125	-56.2	RMS	35.7	11.8	.84	-36.34	-44.2	-27	-17.2	-	-	51	188	V
4	7.258457	-60.5	RMS	35.7	11.8	.84	-36.14	-48.3	-41.2	-7.1	-	-	51	188	V
2	7.505402	-48.32	PK	35.7	11.8	0	-36.21	-37.03	-	-	-21.2	-15.83	51	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

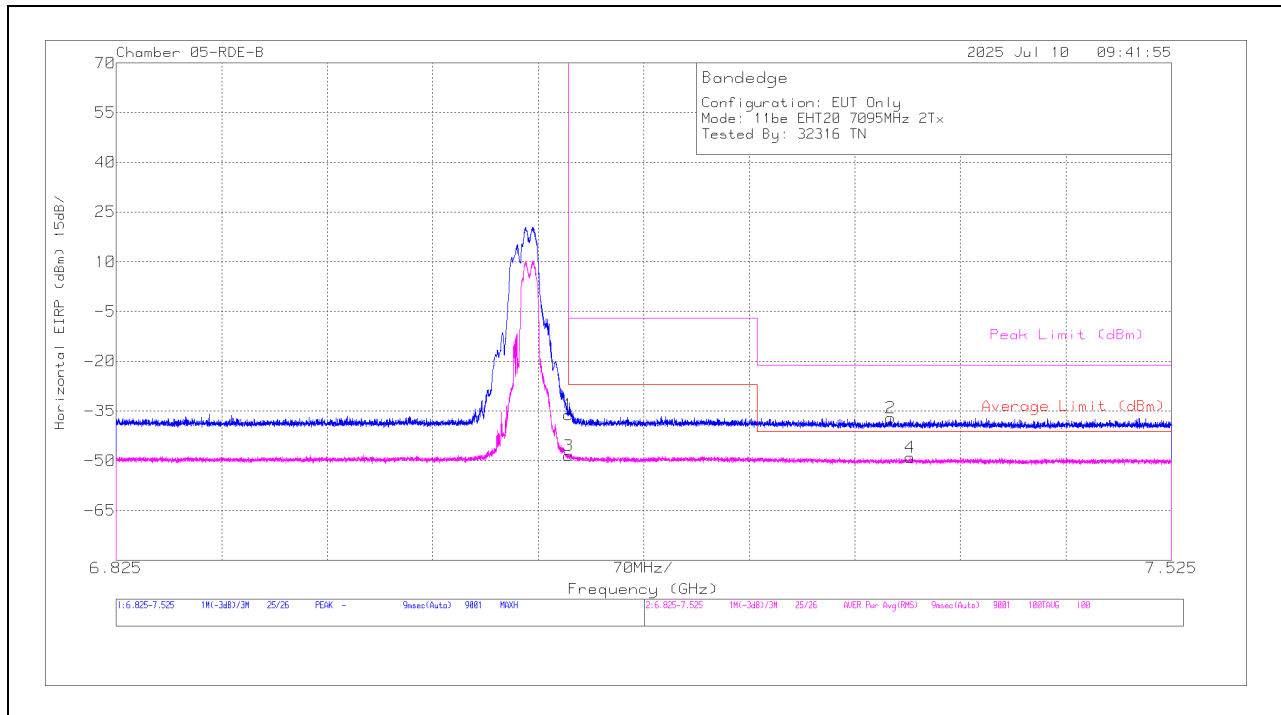
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106+26 / Index 83)	7095	6 + 5	7.125	-47.29	Pk	35.7	11.8	0	-36.34	-36.13	-	-	-7	-29.13	337	104	H
			7.125	-59.67	RMS	35.7	11.8	0	-36.34	-48.51	-27	-21.51	-	-	337	104	H
			* 7.338646	-48.24	Pk	35.6	11.8	0	-36.3	-37.14	-	-	-21.2	-15.94	337	104	H
			* 7.351479	-60.1	RMS	35.6	11.8	0	-36.25	-48.95	-41.2	-7.75	-	-	337	104	H
			7.125	-49.98	Pk	35.7	11.8	0	-36.34	-38.82	-	-	-7	-31.82	342	107	V
			7.125	-61.65	RMS	35.7	11.8	0	-36.34	-50.49	-27	-23.49	-	-	342	107	V
			* 7.255968	-60.23	RMS	35.7	11.8	0	-36.12	-48.85	-41.2	-7.65	-	-	342	107	V
			* 7.508435	-48.08	Pk	35.7	11.8	0	-36.17	-36.75	-	-	-21.2	-15.55	342	107	V
EHT40 (RU 106+26 / Index 85)	7085	6 + 5	* 7.45018	-47.82	Pk	35.4	11.8	0	-34.48	-35.1	-	-	-21.2	-13.9	174	137	H
			* 7.477869	-60.04	RMS	35.4	11.8	0	-34.25	-47.09	-41.2	-5.89	-	-	174	137	H
			7.125	-47.39	Pk	35.5	11.8	0	-34.6	-34.69	-	-	-7	-27.69	174	137	H
			7.125	-60.06	RMS	35.5	11.8	0	-34.6	-47.36	-27	-20.36	-	-	174	137	H
			* 7.480435	-48.11	Pk	35.4	11.8	0	-34.38	-35.29	-	-	-21.2	-14.09	181	132	V
			* 7.459202	-60.17	RMS	35.5	11.8	0	-34.34	-47.21	-41.2	-6.01	-	-	181	132	V
			7.125	-51.06	Pk	35.5	11.8	0	-34.6	-38.36	-	-	-7	-31.36	181	132	V
			7.125	-61.52	RMS	35.5	11.8	0	-34.6	-48.82	-27	-21.82	-	-	181	132	V
EHT80 (RU 106+26/ Index 89)	7025	6 + 5	* 7.461768	-48.42	Pk	35.5	11.8	0	-34.31	-35.43	-	-	-21.2	-14.23	167	201	H
			* 7.519558	-60.19	RMS	35.5	11.8	0.11	-34.4	-47.18	-41.2	-5.98	-	-	167	201	H
			7.125	-50.68	Pk	35.5	11.8	0	-34.6	-37.98	-	-	-7	-30.98	167	201	H
			7.125	-61.29	RMS	35.5	11.8	0.11	-34.6	-48.48	-27	-21.48	-	-	167	201	H
			* 7.436413	-48.36	Pk	35.4	11.8	0	-34.48	-35.64	-	-	-21.2	-14.44	177	190	V
			* 7.46698	-60.34	RMS	35.5	11.8	0.11	-34.34	-47.27	-41.2	-6.07	-	-	177	190	V
			7.125	-51.12	Pk	35.5	11.8	0	-34.6	-38.42	-	-	-7	-31.42	177	190	V
			7.125	-61.7	RMS	35.5	11.8	0.11	-34.6	-48.89	-27	-21.89	-	-	177	190	V
EHT160 (RU 52 / Index 552)	6985	6 + 5	* 7.469157	-63.71	Pk	35.5	11.8	0	-21.2	-37.61	-	-	-21.2	-16.41	200	164	H
			* 7.463246	-75.4	RMS	35.5	11.8	0	-21.32	-49.42	-41.2	-8.22	-	-	200	164	H
			7.125	-66.59	Pk	35.5	11.8	0	-21.98	-41.27	-	-	-7	-34.27	200	164	H
			7.125	-76.62	RMS	35.5	11.8	0	-21.98	-51.3	-27	-24.3	-	-	200	164	H
			* 7.504158	-63.25	Pk	35.4	11.8	0	-21.38	-37.43	-	-	-21.2	-16.23	175	192	V
			* 7.511391	-75.32	RMS	35.5	11.8	0	-21.34	-49.36	-41.2	-8.16	-	-	175	192	V
			7.125	-65.87	Pk	35.5	11.8	0	-21.98	-40.55	-	-	-7	-33.55	175	192	V
			7.125	-76.13	RMS	35.5	11.8	0	-21.98	-50.81	-27	-23.81	-	-	175	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

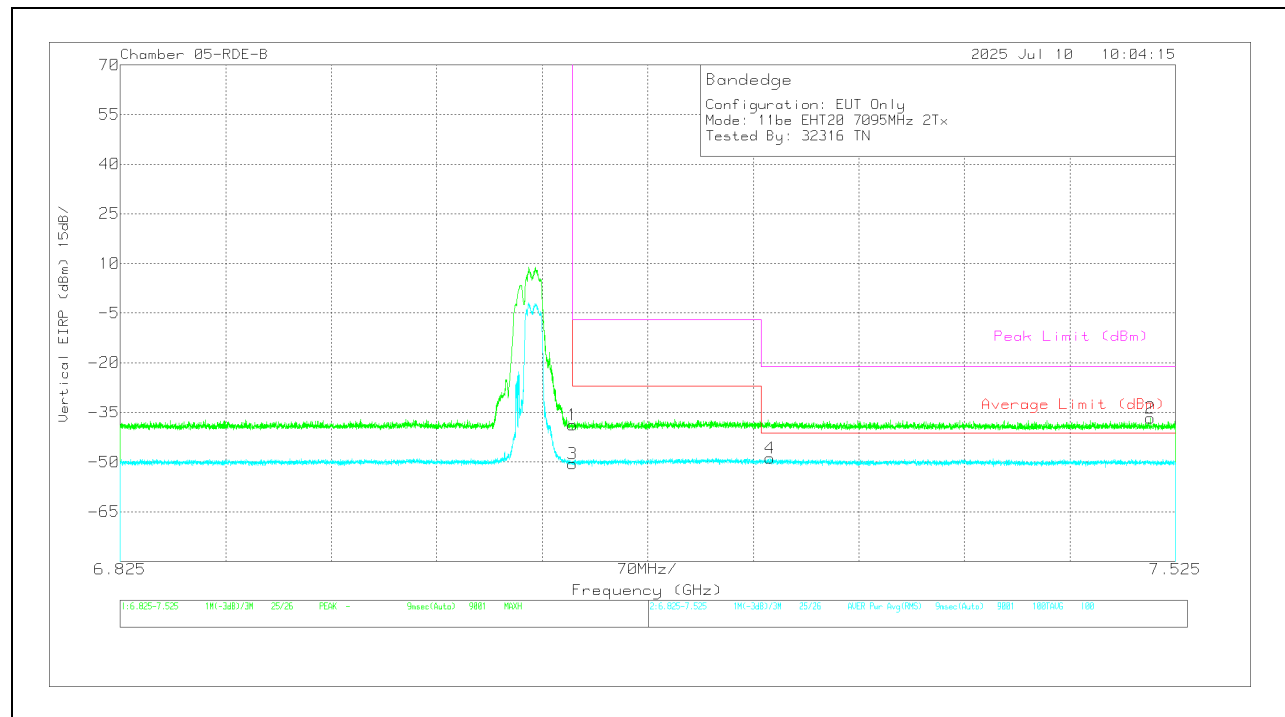
2TX Antenna 6 + Antenna 5 OFDMA MODE: 106+26-Tone, RU Index 83**BANDEDGE (HIGH CHANNEL / 7095MHz)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-47.29	Pk	35.7	11.8	0	-36.34	-36.13	-	-	-7	-29.13	337	104	H
3	7.125	-59.67	RMS	35.7	11.8	0	-36.34	-48.51	-27	-21.51	-	-	337	104	H
2	7.338646	-48.24	Pk	35.6	11.8	0	-36.3	-37.14	-	-	-21.2	-15.94	337	104	H
4	7.351479	-60.1	RMS	35.6	11.8	0	-36.25	-48.95	-41.2	-7.75	-	-	337	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226672 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-49.98	PK	35.7	11.8	0	-36.34	-38.82	-	-	-7	-31.82	342	107	V
3	7.125	-61.65	RMS	35.7	11.8	0	-36.34	-50.49	-27	-23.49	-	-	342	107	V
4	7.255968	-60.23	RMS	35.7	11.8	0	-36.12	-48.85	-41.2	-7.65	-	-	342	107	V
2	7.508435	-48.08	PK	35.7	11.8	0	-36.17	-36.75	-	-	-21.2	-15.55	342	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

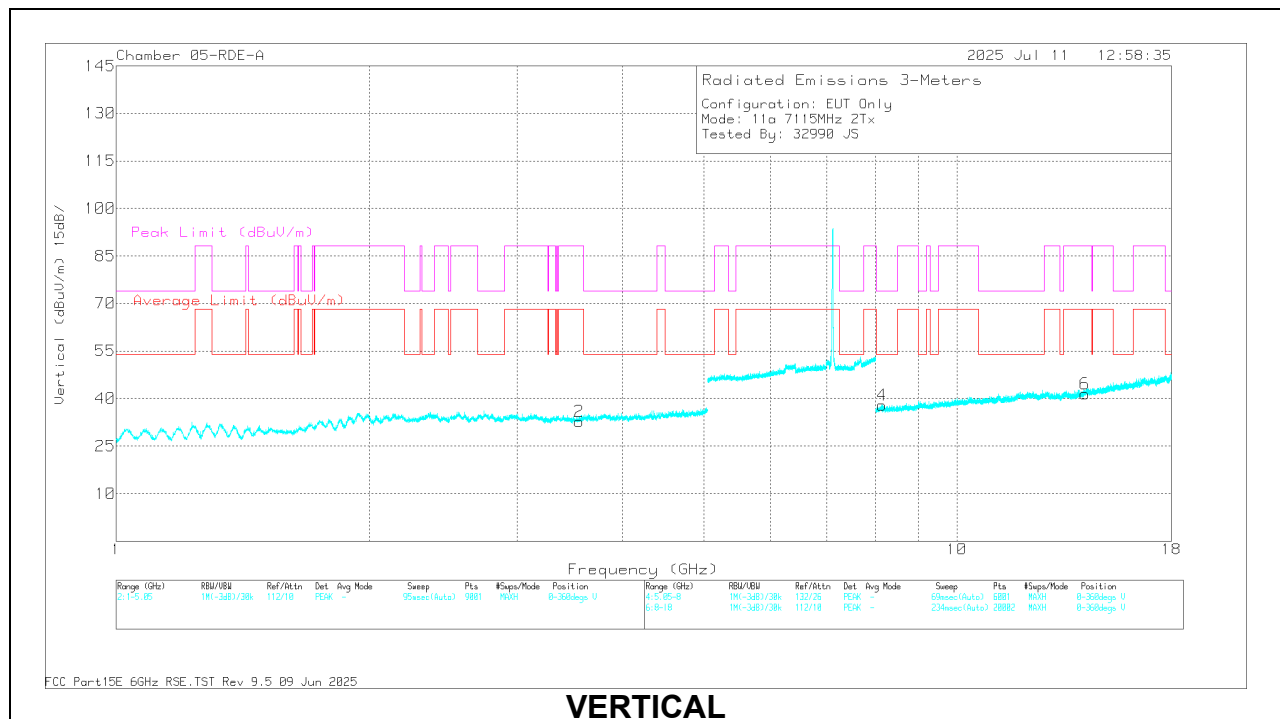
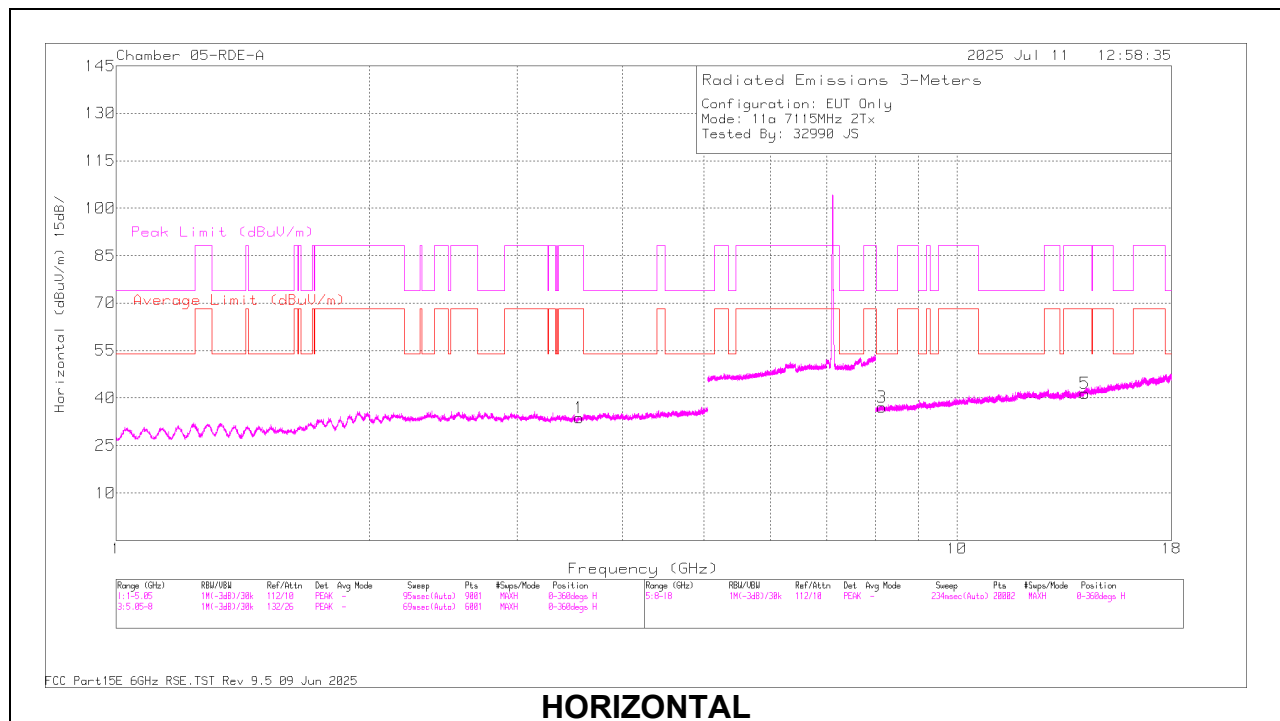
20MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	* 3.552271	57.49	PK-U	33.3	-46.5	0	44.29	-	-	88.2	-43.91	32	257	H
			* 3.57174	45.66	ADR	33.4	-46.53	0	32.53	68.2	-35.67	-	-	32	257	H
			* 3.556186	57.96	PK-U	33.3	-46.58	0	44.68	-	-	88.2	-43.52	52	109	V
			* 3.546601	45.68	ADR	33.3	-46.46	0	32.52	68.2	-35.68	-	-	52	109	V
			* 8.166599	55.03	PK-U	36	-44	0	47.03	-	-	74	-26.97	289	239	H
			* 8.167159	43.51	ADR	36	-44	0	35.51	54	-18.49	-	-	289	239	H
			* 8.13503	55.15	PK-U	36	-43.8	0	47.35	-	-	74	-26.65	114	177	V
			* 8.130886	43.37	ADR	36	-43.8	0	35.57	54	-18.43	-	-	114	177	V
			14.196739	54.02	PK-U	39.3	-40.6	0	52.72	-	-	88.2	-35.48	100	280	V
			14.198167	41.81	ADR	39.3	-40.6	0	40.51	68.2	-27.69	-	-	220	302	H
			14.211901	41.78	ADR	39.3	-40.61	0	40.47	68.2	-27.73	-	-	100	280	V
			14.22928	54.28	PK-U	39.3	-40.6	0	52.98	-	-	88.2	-35.22	220	302	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (7115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
* 3.552271	57.49	PK-U	33.3	0	-46.5	44.29	-	-	88.2	-43.91	32	257	H
* 3.57174	45.66	ADR	33.4	0	-46.53	32.53	68.2	-35.67	-	-	32	257	H
* 3.556186	57.96	PK-U	33.3	0	-46.58	44.68	-	-	88.2	-43.52	52	109	V
* 3.546601	45.68	ADR	33.3	0	-46.46	32.52	68.2	-35.68	-	-	52	109	V
* 8.166599	55.03	PK-U	36	0	-44	47.03	-	-	74	-26.97	289	239	H
* 8.167159	43.51	ADR	36	0	-44	35.51	54	-18.49	-	-	289	239	H
* 8.13503	55.15	PK-U	36	0	-43.8	47.35	-	-	74	-26.65	114	177	V
* 8.130886	43.37	ADR	36	0	-43.8	35.57	54	-18.43	-	-	114	177	V
14.196739	54.02	PK-U	39.3	0	-40.6	52.72	-	-	88.2	-35.48	100	280	V
14.198167	41.81	ADR	39.3	0	-40.6	40.51	68.2	-27.69	-	-	220	302	H
14.211901	41.78	ADR	39.3	0	-40.61	40.47	68.2	-27.73	-	-	100	280	V
14.22928	54.28	PK-U	39.3	0	-40.6	52.98	-	-	88.2	-35.22	220	302	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

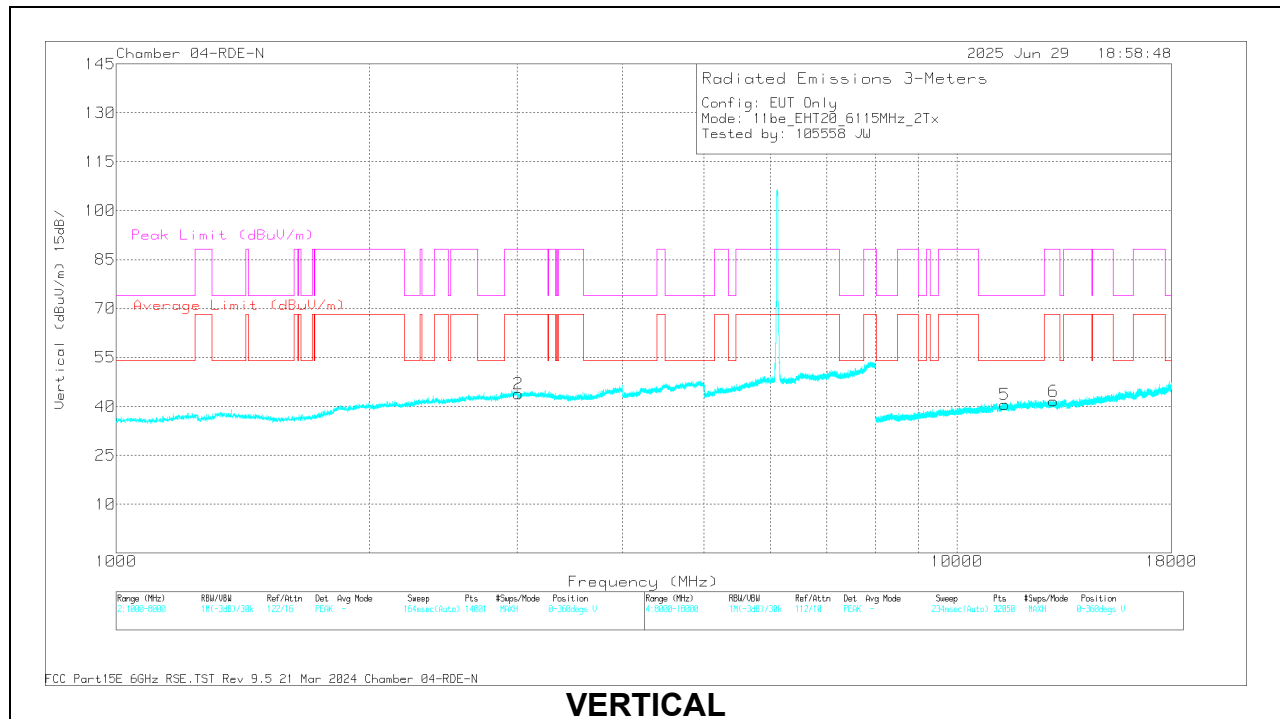
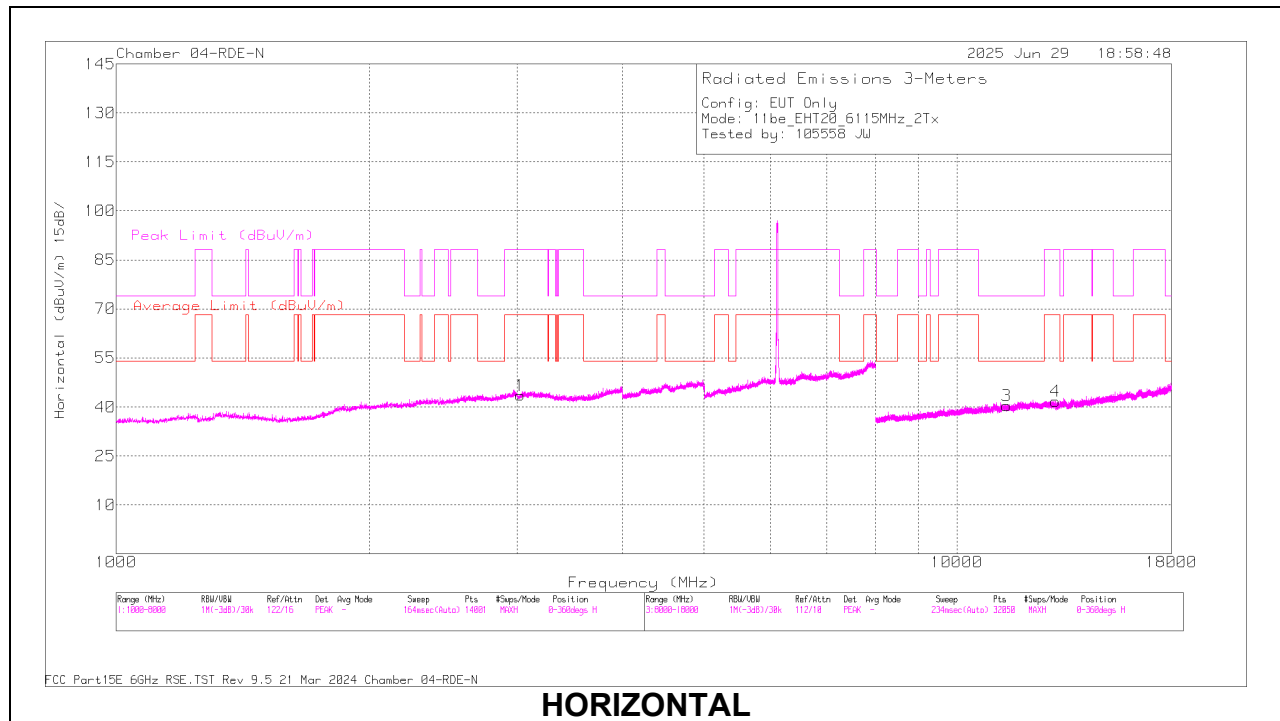
20MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 5	* 11.458002	55.81	PK-U	38.3	-44.42	0	49.69	-	-	74	-24.31	3	103	H
			* 11.47708	44.57	ADR	38.3	-44	0.13	39	54	-15	-	-	3	103	H
			* 11.393.163	56.67	PK-U	38.2	-44.52	0	50.35	-	-	74	-23.65	345	123	V
			* 11.389049	44.7	ADR	38.2	-44.65	0.13	38.38	54	-15.62	-	-	345	123	V
			3.012058	45.44	PK-U	32.8	-25.7	0	52.54	-	-	88.2	-35.66	205	377	H
			3.025831	34.09	ADR	32.9	-25.65	0.13	41.47	68.2	-26.73	-	-	77	300	V
			3.025963	46.37	PK-U	32.9	-25.64	0	53.63	-	-	88.2	-34.57	77	300	V
			3.040182	34.1	ADR	32.9	-25.56	0.13	41.57	68.2	-26.63	-	-	205	377	H
			13.011493	55.99	PK-U	38.9	-43.29	0	51.6	-	-	88.2	-36.6	5	254	V
			13.01338	44.59	ADR	38.9	-43.32	0.13	40.3	68.2	-27.9	-	-	5	254	V
			13.093023	55.79	PK-U	38.9	-43.27	0	51.42	-	-	88.2	-36.78	108	248	H
			13.104607	44.11	ADR	38.9	-43.56	0.13	39.58	68.2	-28.62	-	-	108	248	H
	6535 (Mid Channel)	6 + 5	* 10.840937	57.04	PK-U	37.7	-45.31	0	49.43	-	-	74	-24.57	244	239	H
			* 10.833146	45.5	ADR	37.7	-45.33	0.13	38	54	-16	-	-	244	239	H
			* 14.497455	56.58	PK-U	39.4	-44.27	0	51.71	-	-	74	-22.29	349	388	H
			* 14.49316	45.3	ADR	39.4	-44.17	0.13	40.66	54	-13.34	-	-	349	388	H
			* 10.827306	56.88	PK-U	37.7	-45.29	0	49.29	-	-	74	-24.71	90	313	V
			* 10.824139	45.42	ADR	37.7	-45.31	0.13	37.94	54	-16.06	-	-	90	313	V
			2.962165	34.82	ADR	32.7	-25.8	0.13	41.85	68.2	-26.35	-	-	353	205	V
			2.965281	34.81	ADR	32.7	-25.72	0.13	41.92	68.2	-26.28	-	-	288	344	H
			2.987096	46.58	PK-U	32.8	-25.68	0	53.7	-	-	88.2	-34.5	288	344	H
			2.994592	46.21	PK-U	32.8	-25.64	0	53.37	-	-	88.2	-34.83	353	205	V
			14.406913	56.41	PK-U	39.4	-44	0	51.81	-	-	88.2	-36.39	120	108	V
			14.444173	44.89	ADR	39.4	-44.32	0.13	40.1	68.2	-28.1	-	-	120	108	V
	7095 (High Channel)	6 + 5	* 3662.899	46.46	PK-U	33.3	-25.52	0	54.24	-	-	74	-19.76	356	349	H
			* 3675.501	34.03	ADR	33.3	-25.44	0.13	42.02	54	-11.98	-	-	356	349	H
			* 3644.791	45.55	PK-U	33.3	-25.41	0	53.44	-	-	74	-20.56	324	327	V
			* 3628.49	33.96	ADR	33.2	-25.32	0.13	41.97	54	-12.03	-	-	324	327	V
			* 11.271714	57.16	PK-U	38.1	-44.65	0	50.61	-	-	74	-23.39	31	384	H
			* 11.298497	45.46	ADR	38.2	-44.95	0.13	38.84	54	-15.16	-	-	31	384	H
			* 11.238813	56.27	PK-U	38.1	-44.9	0	49.47	-	-	74	-24.53	341	243	V
			* 11.235403	44.95	ADR	38.1	-44.81	0.13	38.37	54	-15.63	-	-	341	243	V
			13.893582	56.06	PK-U	39	-43.86	0	51.2	-	-	88.2	-37	214	258	V
			13.900291	44.49	ADR	39	-43.83	0.13	39.79	68.2	-28.41	-	-	214	258	V
			13.922048	44.75	ADR	39	-43.64	0.13	40.24	68.2	-27.96	-	-	344	146	H
			13.928792	56.11	PK-U	39	-43.71	0	51.4	-	-	88.2	-36.8	344	146	H
11be (Partial RU Mode / Highest PSD)	6115 (106T+26) (Low Channel)	6 + 5	* 8.367386	54.98	PK-U	36.1	-43.8	0	47.28	-	-	74	-26.72	193	198	H
			* 8.374137	43.17	ADR	36.1	-43.8	0.1	35.57	54	-18.43	-	-	193	198	H
			* 12.194595	53.48	PK-U	39.3	-41.14	0	51.64	-	-	74	-22.36	313	228	H
			* 12.191687	41.6	ADR	39.3	-41.07	0.1	39.93	54	-14.07	-	-	313	228	H
			* 8.357371	55.16	PK-U	36.1	-43.66	0	47.6	-	-	74	-26.4	114	241	V
			* 8.373478	43.25	ADR	36.1	-43.8	0.1	35.65	54	-18.35	-	-	114	241	V
			* 12.195667	53.2	PK-U	39.3	-41.17	0	51.33	-	-	74	-22.67	77	196	V
			* 12.199483	41.65	ADR	39.3	-41.25	0.1	39.8	54	-14.2	-	-	77	196	V
			3.056814	58.42	PK-U	33.4	-47.48	0	44.34	-	-	88.2	-43.86	248	332	V
			3.058156	46.72	ADR	33.4	-47.48	0.1	32.74	68.2	-35.46	-	-	248	332	V
			3.059085	58.24	PK-U	33.4	-47.4	0	44.24	-	-	88.2	-43.96	261	264	H
			3.070368	46.61	ADR	33.4	-47.54	0.1	32.57	68.2	-35.63	-	-	261	264	H
	6535 (106T+26) (Mid Channel)	6 + 5	* 3.260707	45.6	ADR	33.2	-46.7	0.1	32.2	54	-21.8	-	-	303	107	V
			* 8.231153	55.4	PK-U	36	-43.8	0	47.6	-	-	74	-26.4	188	213	H
			* 8.244936	43.28	ADR	36	-43.7	0.1	35.68	54	-18.32	-	-	188	213	H
			* 8.249795	55	PK-U	36	-43.7	0	47.3	-	-	74	-26.7	32	131	V
			* 8.244952	43.23	ADR	36	-43.7	0.1	35.63	54	-18.37	-	-	32	131	V
			3.253588	57.7	PK-U	33.2	-46.6	0	44.3	-	-	88.2	-43.9	338	139	H
			3.255801	45.69	ADR	33.2	-46.52	0.1	32.47	68.2	-35.73	-	-	338	139	H
			3.277043	57.32	PK-U	33.2	-46.7	0	43.82	-	-	88.2	-44.38	303	107	V
			13.036121	42.23	ADR	39.1	-41.5	0.1	39.93	68.2	-28.27	-	-	202	206	H
			13.038065	41.84	ADR	39.1	-41.5	0.1	39.54	68.2	-28.66	-	-	328	238	V
			13.051739	53.76	PK-U	39.1	-41.5	0	51.36	-	-	88.2	-36.84	202	206	H
			13.054579	53.62	PK-U	39.1	-41.4	0	51.32	-	-	88.2	-36.88	328	238	V
	7095 (106T+26) (High Channel)	6 + 5	* 3.560814	57.35	PK-U	33.4	-46.6	0	44.15	-	-	88.2	-44.05	322	276	H
			* 3.558987	45.67	ADR	33.3	-46.6	0.1	32.47	68.2	-35.73	-	-	322	276	H
			* 3.546766	57.2	PK-U	33.3	-46.48	0	44.02	-	-	88.2	-44.18	345	123	V
			* 3.555681	45.66	ADR	33.3	-46.6	0.1	32.46	68.2	-35.74	-	-	345	123	V
			* 8.143761	54.9	PK-U	36	-43.7	0	47.2	-	-	74	-26.8	116	204	H
			* 8.13263	43.33	ADR	36	-43.8	0.1	35.63	54	-18.37	-	-	116	204	H
			* 8.165199	55.4	PK-U	36	-44	0	47.4	-	-	74	-26.6	1	221	V
			* 8.15228	43.59	ADR	36	-43.9	0.1	35.79	54	-18.21	-	-	1	221	V
			14.177675	53.62	PK-U	39.3	-40.67	0	52.25	-	-	88.2	-35.95	76	245	H
			14.180702	41.9	ADR	39.3	-40.73	0.1	40.57	68.2	-27.63	-	-	76	245	H
			14.181922	53.84	PK-U	39.3	-40.7	0	52.44	-	-	88.2	-35.76	60	193	V
			14.183706	42.19	ADR	39.3	-40.73	0.1	40.86	68.2	-27.34	-	-	60	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6115MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.458002	55.81	PK-U	38.3	0	-44.42	49.69	-	-	74	-24.31	3	103	H
* 11.477708	44.57	ADR	38.3	.13	-44	39	54	-15	-	-	3	103	H
* 11.393163	56.67	PK-U	38.2	0	-44.52	50.35	-	-	74	-23.65	345	123	V
* 11.389049	44.7	ADR	38.2	.13	-44.65	38.38	54	-15.62	-	-	345	123	V
3.012058	45.44	PK-U	32.8	0	-25.7	52.54	-	-	88.2	-35.66	205	377	H
3.025831	34.09	ADR	32.9	.13	-25.65	41.47	68.2	-26.73	-	-	77	300	V
3.025963	46.37	PK-U	32.9	0	-25.64	53.63	-	-	88.2	-34.57	77	300	V
3.040182	34.1	ADR	32.9	.13	-25.56	41.57	68.2	-26.63	-	-	205	377	H
13.011493	55.99	PK-U	38.9	0	-43.29	51.6	-	-	88.2	-36.6	5	254	V
13.01338	44.59	ADR	38.9	.13	-43.32	40.3	68.2	-27.9	-	-	5	254	V
13.093023	55.79	PK-U	38.9	0	-43.27	51.42	-	-	88.2	-36.78	108	248	H
13.104607	44.11	ADR	38.9	.13	-43.56	39.58	68.2	-28.62	-	-	108	248	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

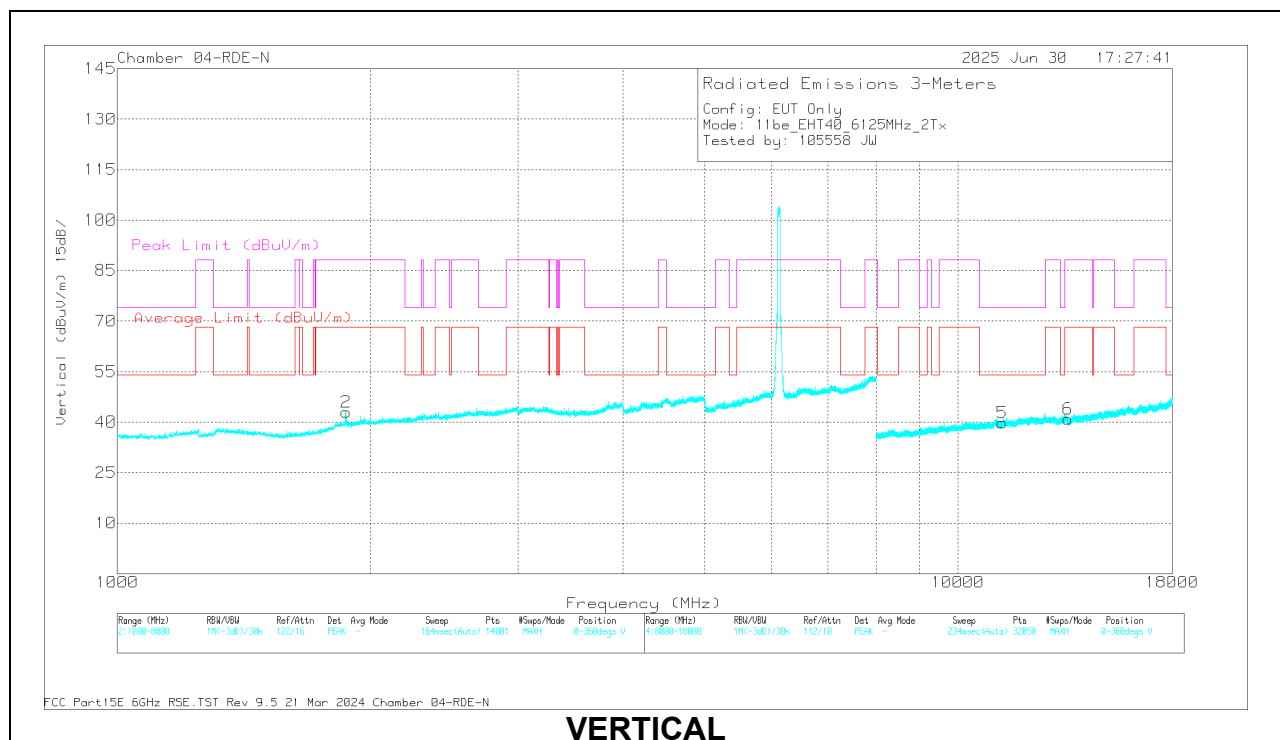
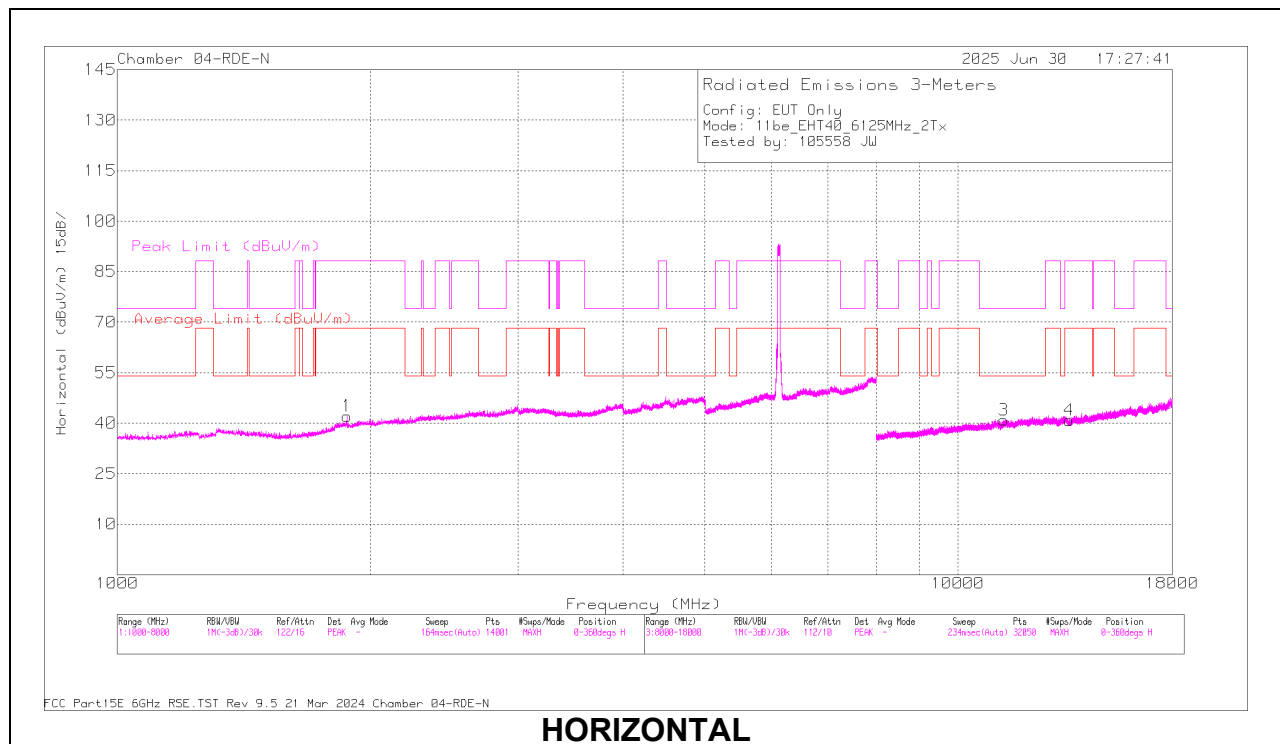
40MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6 + 5	* 11.338832	56.38	PK-U	38.2	-44.66	0	49.92	-	-	74	-24.08	178	127	H
			* 11.338815	44.98	ADR	38.2	-44.66	0.23	38.75	54	-15.25	-	-	178	127	H
			* 11.313108	56.34	PK-U	38.2	-44.9	0	49.64	-	-	74	-24.36	357	222	V
			* 11.305904	44.86	ADR	38.2	-44.96	0.23	38.33	54	-15.67	-	-	357	222	V
			1.860813	46.43	PK-U	31	-26.89	0	50.54	-	-	88.2	-37.66	3	297	V
			1.877361	33.92	ADR	31.2	-26.88	0.23	38.47	68.2	-29.73	-	-	3	297	V
			1.891079	34.03	ADR	31.3	-26.87	0.23	38.69	68.2	-29.51	-	-	5	311	H
			1.894933	45.61	PK-U	31.3	-26.95	0	49.96	-	-	88.2	-38.24	5	311	H
			13.506854	55.6	PK-U	38.8	-43.52	0	50.88	-	-	88.2	-37.32	112	352	V
			13.524909	44.21	ADR	38.8	-43.63	0.23	39.61	68.2	-28.59	-	-	112	352	V
			13.552685	43.97	ADR	38.8	-43.8	0.23	39.2	68.2	-29	-	-	357	175	H
			13.557857	55.39	PK-U	38.8	-43.86	0	50.33	-	-	88.2	-37.87	357	175	H
			3.08833	34.16	ADR	33	-25.5	0.23	41.89	68.2	-26.31	-	-	229	215	V
			3.094667	45.43	PK-U	33	-25.58	0	52.85	-	-	88.2	-35.35	229	215	V
			3.103207	45.79	PK-U	33	-25.44	0	53.35	-	-	88.2	-34.85	318	266	H
			3.10339	34.32	ADR	33	-25.44	0.23	42.11	68.2	-26.09	-	-	318	266	H
			10.538964	56.94	PK-U	37.6	-45.47	0	49.07	-	-	88.2	-39.13	88	359	H
			10.559894	45.57	ADR	37.6	-45.47	0.23	37.93	68.2	-30.27	-	-	88	359	H
	6525 (Mid Channel)	6 + 5	10.569538	57.17	PK-U	37.6	-45.51	0	49.26	-	-	88.2	-38.94	326	159	V
			10.572448	45.51	ADR	37.6	-45.47	0.23	37.87	68.2	-30.33	-	-	326	159	V
			13.17276	43.94	ADR	38.9	-43.79	0.23	39.28	68.2	-28.92	-	-	278	362	V
			13.179826	56.24	PK-U	38.9	-43.83	0	51.31	-	-	88.2	-36.89	278	362	V
			13.189837	54.96	PK-U	38.9	-43.88	0	49.98	-	-	88.2	-38.22	33	115	H
			13.223289	43.76	ADR	38.9	-43.6	0.23	39.29	68.2	-28.91	-	-	33	115	H
			* 10.871438	56.58	PK-U	37.8	-44.91	0	49.47	-	-	74	-24.53	22	377	H
			* 10.892131	45.35	ADR	37.8	-45.2	0.23	38.18	54	-15.82	-	-	22	377	H
			* 10.797821	56.62	PK-U	37.7	-45.32	0	49	-	-	74	-25	68	214	V
			* 10.789035	45.13	ADR	37.7	-45.35	0.23	37.71	54	-16.29	-	-	68	214	V
			3.041983	46.31	PK-U	32.9	-25.49	0	53.72	-	-	88.2	-34.48	93	315	H
			3.050394	34.24	ADR	32.9	-25.53	0.23	41.84	68.2	-26.36	-	-	93	315	H
			3.053242	34.15	ADR	32.9	-25.48	0.23	41.8	68.2	-26.4	-	-	134	389	V
			3.057213	45.6	PK-U	32.9	-25.39	0	53.11	-	-	88.2	-35.09	134	389	V
			13.688076	55.73	PK-U	38.8	-43.64	0	50.89	-	-	88.2	-37.31	300	126	V
			13.688668	44.01	ADR	38.8	-43.6	0.23	39.44	68.2	-28.76	-	-	300	126	V
			13.695588	54.98	PK-U	38.8	-43.52	0	50.26	-	-	88.2	-37.94	124	126	H
			13.709878	43.92	ADR	38.8	-43.34	0.23	39.61	68.2	-28.59	-	-	124	126	H
11be (Partial RU Mode / Highest PSD)	6125 (106+26T) (Low Channel)	6 + 5	3.06509	56.63	PK-U	33	-46.3	0	43.33	-	-	88.2	-44.87	2	279	H
			3.06619	45.26	ADR	33	-46.28	0	31.98	68.2	-36.22	-	-	2	279	H
			2.042314	57.4	PK-U	31.7	-46.43	0	42.67	-	-	88.2	-45.53	307	255	H
			2.041076	46.18	ADR	31.7	-46.4	0	31.48	68.2	-36.72	-	-	307	255	H
			3.065459	56.5	PK-U	33	-46.3	0	43.2	-	-	88.2	-45	10	233	V
			3.065719	44.95	ADR	33	-46.3	0	31.65	68.2	-36.55	-	-	10	233	V
			2.039636	58.26	PK-U	31.7	-46.34	0	43.62	-	-	88.2	-44.58	208	303	V
			2.040004	46.23	ADR	31.7	-46.3	0	31.63	68.2	-36.57	-	-	208	303	V
			* 12.253528	53.9	PK-U	38.7	-41.5	0	51.1	-	-	74	-22.9	220	307	H
			* 12.25156	42.04	ADR	38.7	-41.56	0	39.18	54	-14.82	-	-	220	307	H
			* 12.247931	53.62	PK-U	38.7	-41.59	0	50.73	-	-	74	-23.27	80	200	V
			* 12.247361	42.06	ADR	38.7	-41.54	0	39.22	54	-14.78	-	-	80	200	V
	6525 (106T+26) (Mid Channel)	6 + 5	* 3.261735	55.74	PK-U	32.9	-45.27	0	43.37	-	-	74	-30.63	67	314	H
			* 3.263855	44.22	ADR	32.9	-45.2	0	31.92	54	-22.08	-	-	67	314	H
			2.17123	57.44	PK-U	31.7	-46.6	0	42.54	-	-	88.2	-45.66	228	285	H
			2.1738	45.9	ADR	31.7	-46.52	0	31.08	68.2	-37.12	-	-	228	285	H
			* 3.26195	56.48	PK-U	32.9	-45.3	0	44.08	-	-	74	-29.92	240	357	V
			* 3.263096	44.12	ADR	32.9	-45.2	0	31.82	54	-22.18	-	-	240	357	V
			2.178637	57.38	PK-U	31.7	-46.66	0	42.42	-	-	88.2	-45.78	190	153	V
			2.178618	45.98	ADR	31.7	-46.66	0	31.02	68.2	-37.18	-	-	190	153	V
			13.047317	53.83	PK-U	38.8	-41.7	0	50.93	-	-	88.2	-37.27	263	212	H
			13.04851	42.25	ADR	38.8	-41.75	0	39.3	68.2	-28.9	-	-	263	212	H
			13.050809	54.28	PK-U	38.8	-41.72	0	51.36	-	-	88.2	-36.84	287	276	V
			13.049544	42.28	ADR	38.8	-41.8	0	39.28	68.2	-28.92	-	-	287	276	V
	7085 (106T+26) (High Channel)	6 + 5	* 3.54215	55.42	PK-U	33	-45.11	0	43.31	-	-	88.2	-44.89	170	400	H
			* 3.544432	43.93	ADR	33	-45.2	0	31.73	68.2	-36.47	-	-	170	400	H
			* 2.362173	57.83	PK-U	31.9	-47	0	42.73	-	-	74	-31.27	43	349	H
			* 2.359407	46.32	ADR	31.9	-47	0	31.22	54	-22.78	-	-	43	349	H
			* 3.537161	55.2	PK-U	33	-45.1	0	43.1	-	-	88.2	-45.1	71	386	V
			* 3.538338	43.67	ADR	33	-45.13	0	31.54	68.2	-36.66	-	-	71	386	V
			* 2.360866	58.37	PK-U	31.9	-46.91	0	43.36	-	-	74	-30.64	346	240	V
			* 2.358141	46.23	ADR	31.9	-47	0	31.13	54	-22.87	-	-	346	240	V
			14.169324	54.15	PK-U	39.1	-42.43	0	50.82	-	-	88.2	-37.38	215	357	H
			14.169937	43.23	ADR	39.1	-42.49	0	39.84	68.2	-28.36	-	-	215	357	H
			14.172474	54.28	PK-U	39.1	-42.3	0	51.08	-	-	88.2	-37.12	351	256	V
			14.171955	42.93	ADR	39.1	-42.3	0	39.73	68.2	-28.47	-	-	351	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6125MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.338832	56.38	PK-U	38.2	0	-44.66	49.92	-	-	74	-24.08	178	127	H
* 11.338815	44.98	ADR	38.2	0.23	-44.66	38.75	54	-15.25	-	-	178	127	H
* 11.313108	56.34	PK-U	38.2	0	-44.9	49.64	-	-	74	-24.36	357	222	V
* 11.305904	44.86	ADR	38.2	0.23	-44.96	38.33	54	-15.67	-	-	357	222	V
1.860813	46.43	PK-U	31	0	-26.89	50.54	-	-	88.2	-37.66	3	297	V
1.877361	33.92	ADR	31.2	0.23	-26.88	38.47	68.2	-29.73	-	-	3	297	V
1.891079	34.03	ADR	31.3	0.23	-26.87	38.69	68.2	-29.51	-	-	5	311	H
1.894933	45.61	PK-U	31.3	0	-26.95	49.96	-	-	88.2	-38.24	5	311	H
13.506854	55.6	PK-U	38.8	0	-43.52	50.88	-	-	88.2	-37.32	112	352	V
13.524909	44.21	ADR	38.8	0.23	-43.63	39.61	68.2	-28.59	-	-	112	352	V
13.552685	43.97	ADR	38.8	0.23	-43.8	39.2	68.2	-29	-	-	357	175	H
13.557857	55.39	PK-U	38.8	0	-43.86	50.33	-	-	88.2	-37.87	357	175	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

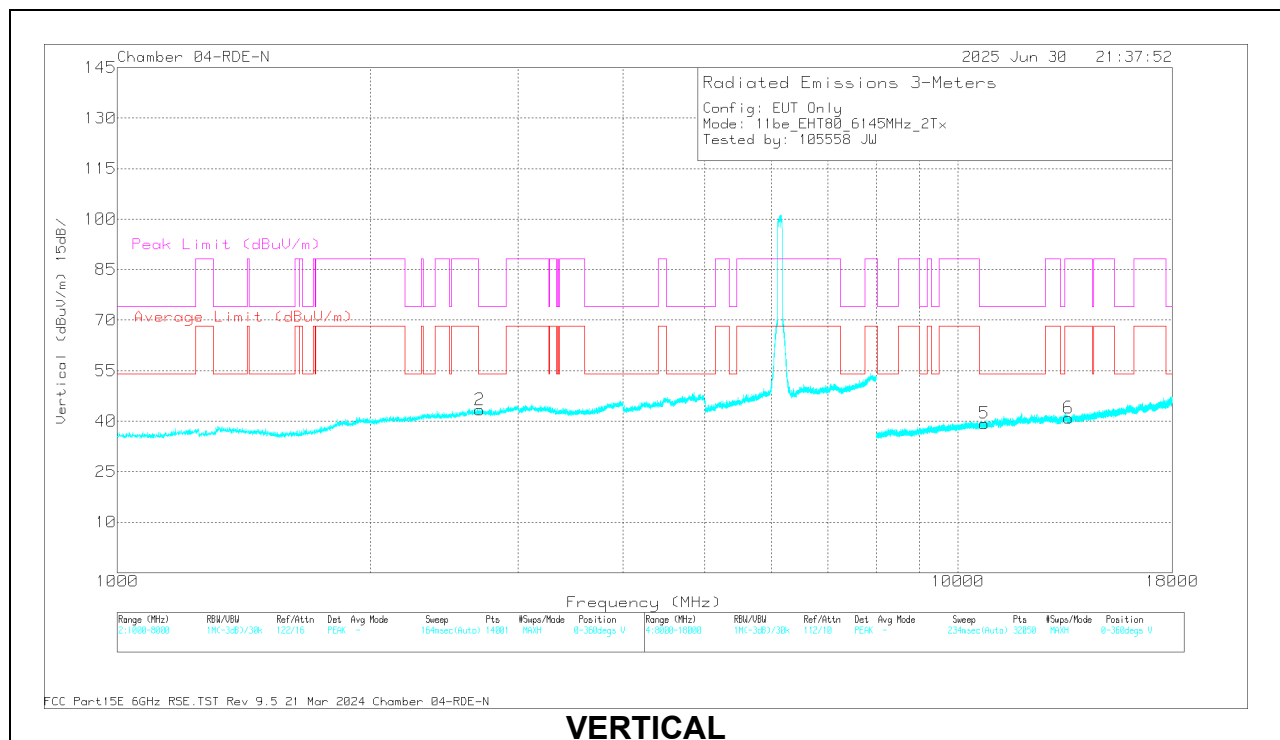
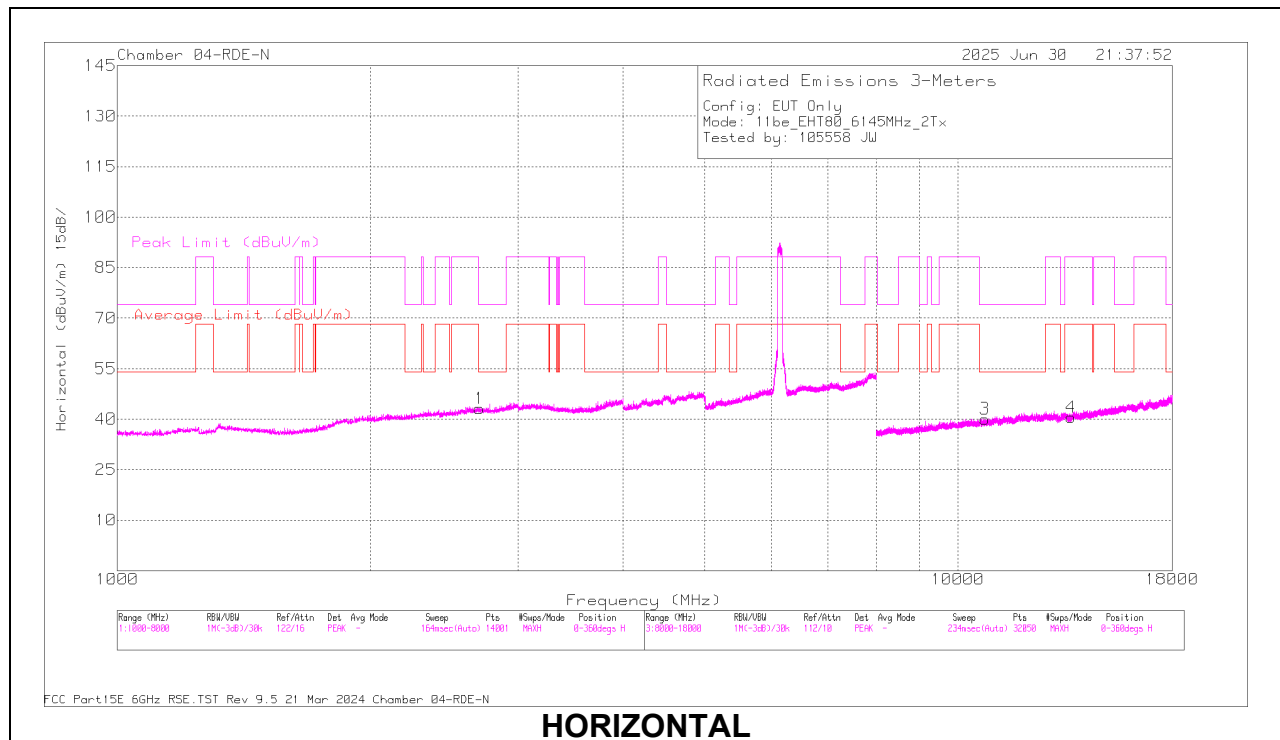
80MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F lt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6 + 5	* 2.708054	45.72	PK-U	32.4	-25.95	0	52.17	-	-	74	-21.83	42	128	H
			* 2.687533	34.48	ADR	32.4	-25.88	0.41	41.41	68.2	-26.79	-	-	42	128	H
			* 2.682853	46.2	PK-U	32.4	-25.84	0	52.76	-	-	88.2	-35.44	183	380	V
			* 2.695538	34.37	ADR	32.4	-25.85	0.41	41.33	54	-12.67	-	-	183	380	V
			* 10.769316	56.98	PK-U	37.7	-45.39	0	49.29	-	-	74	-24.71	340	243	H
			* 10.790486	45.44	ADR	37.7	-45.39	0.41	38.16	54	-15.84	-	-	340	243	H
			* 10.777528	56.84	PK-U	37.7	-45.4	0	49.14	-	-	74	-24.86	90	137	V
			* 10.772286	45.53	ADR	37.7	-45.37	0.41	38.27	54	-15.73	-	-	90	137	V
			13.530001	43.98	ADR	38.8	-43.62	0.41	39.57	68.2	-28.63	-	-	167	153	V
			13.546573	55.54	PK-U	38.8	-43.72	0	50.62	-	-	88.2	-37.58	167	153	V
			13.640301	55.43	PK-U	38.8	-43.9	0	50.33	-	-	88.2	-37.87	308	286	H
			13.654089	43.86	ADR	38.8	-43.81	0.41	39.26	68.2	-28.94	-	-	308	286	H
	6545 (Mid Channel)	6 + 5	* 2.339747	46.85	PK-U	31.8	-26.51	0	52.14	-	-	74	-21.86	354	369	H
			* 2.314003	34.93	ADR	31.7	-26.6	0.41	40.44	54	-13.56	-	-	354	369	H
			* 2.317274	45.99	PK-U	31.7	-26.62	0	51.07	-	-	74	-22.93	193	382	V
			* 2.336984	34.35	ADR	31.8	-26.54	0.41	40.02	54	-13.98	-	-	193	382	V
			10.353988	45.38	ADR	37.8	-45.54	0.41	38.05	68.2	-30.15	-	-	333	244	V
			10.357448	56.57	PK-U	37.8	-45.49	0	48.88	-	-	88.2	-39.32	333	244	V
			10.424735	56.37	PK-U	37.7	-45.57	0	48.5	-	-	88.2	-39.7	147	175	H
			10.444325	45.19	ADR	37.6	-45.49	0.41	37.71	68.2	-30.49	-	-	147	175	H
			13.047307	55.19	PK-U	38.9	-43.85	0	50.24	-	-	88.2	-37.96	360	229	V
			13.068779	44.09	ADR	38.9	-43.51	0.41	39.89	68.2	-28.31	-	-	360	229	V
			13.08504	43.98	ADR	38.9	-43.21	0.41	40.08	68.2	-28.12	-	-	263	160	H
			13.092356	55.7	PK-U	38.9	-43.35	0	51.25	-	-	88.2	-36.95	263	160	H
	7025 (High Channel)	6 + 5	* 2.851433	46.13	PK-U	32.4	-25.83	0	52.7	-	-	74	-21.3	44	164	H
			* 2.854241	34.67	ADR	32.4	-25.91	0.41	41.57	54	-12.43	-	-	44	164	H
			* 2.864444	46.95	PK-U	32.5	-25.77	0	53.68	-	-	74	-20.32	334	386	V
			* 2.832826	34.75	ADR	32.4	-25.84	0.41	41.72	54	-12.28	-	-	334	386	V
			* 10.837529	56.94	PK-U	37.7	-45.33	0	49.31	-	-	74	-24.69	24	251	H
			* 10.843627	45.26	ADR	37.7	-45.29	0.41	38.08	54	-15.92	-	-	24	251	H
			* 10.824498	56.83	PK-U	37.7	-45.3	0	49.23	-	-	74	-24.77	284	244	V
			* 10.826544	45.47	ADR	37.7	-45.27	0.41	38.31	54	-15.69	-	-	284	244	V
			13.122469	44.07	ADR	38.8	-43.86	0.41	39.42	68.2	-28.78	-	-	179	391	H
			13.135222	55.71	PK-U	38.9	-43.72	0	50.89	-	-	88.2	-37.31	275	131	V
			13.145982	55.64	PK-U	38.9	-43.54	0	51	-	-	88.2	-37.2	179	391	H
			13.166476	43.88	ADR	38.9	-43.68	0.41	39.51	68.2	-28.69	-	-	275	131	V
11be (Partial RU Mode / Highest PSD)	6145 (106T+26) (Low Channel)	6 + 5	3.070053	56.73	PK-U	33	-46.2	0	43.53	-	-	88.2	-44.67	192	206	H
			3.071216	45.05	ADR	33	-46.2	0.09	31.94	68.2	-36.26	-	-	192	206	H
			2.045005	57.24	PK-U	31.8	-46.5	0	42.54	-	-	88.2	-45.66	85	304	H
			2.045563	45.84	ADR	31.8	-46.5	0.09	31.23	68.2	-36.97	-	-	85	304	H
			3.070365	56.27	PK-U	33	-46.2	0	43.07	-	-	88.2	-45.13	292	199	V
			3.073026	44.94	ADR	33	-46.2	0.09	31.83	68.2	-36.37	-	-	292	199	V
			2.047534	56.14	PK-U	31.8	-46.45	0	41.49	-	-	88.2	-46.71	209	236	V
			2.047516	44.8	ADR	31.8	-46.45	0.09	30.24	68.2	-37.96	-	-	209	236	V
			* 12.287815	53.41	PK-U	38.6	-40.98	0	51.03	-	-	74	-22.97	2	321	H
			* 12.287256	41.64	ADR	38.6	-40.93	0.09	39.4	54	-14.6	-	-	2	321	H
			* 12.287957	52.79	PK-U	38.6	-41	0	50.39	-	-	74	-23.61	161	108	V
			* 12.288068	41.41	ADR	38.6	-41	0.09	39.1	54	-14.9	-	-	161	108	V
	6545 (106T+26) (Mid Channel)	6 + 5	3.274176	55.42	PK-U	32.8	-45.14	0	43.08	-	-	88.2	-45.12	296	153	H
			3.270485	44.16	ADR	32.9	-45.2	0.09	31.95	68.2	-36.25	-	-	296	153	H
			2.180579	58.05	PK-U	31.7	-46.6	0	43.15	-	-	88.2	-45.05	3	374	H
			2.179817	45.97	ADR	31.7	-46.62	0.09	31.14	68.2	-37.06	-	-	3	374	H
			3.270151	55.54	PK-U	32.9	-45.2	0	43.24	-	-	88.2	-44.96	129	237	V
			3.273425	44.03	ADR	32.8	-45.1	0.09	31.82	68.2	-36.38	-	-	129	237	V
			2.183355	58.4	PK-U	31.7	-46.54	0	43.56	-	-	88.2	-44.64	79	400	V
			2.185298	46.05	ADR	31.7	-46.5	0.09	31.34	68.2	-36.86	-	-	79	400	V
			13.0874	53.9	PK-U	38.8	-41.74	0	50.96	-	-	88.2	-37.24	341	380	H
			13.088651	42.15	ADR	38.8	-41.8	0.09	39.24	68.2	-28.96	-	-	341	380	H
			13.084611	54.43	PK-U	38.8	-41.76	0	51.47	-	-	88.2	-36.73	4	285	V
			13.084758	42.53	ADR	38.8	-41.78	0.09	39.64	68.2	-28.56	-	-	4	285	V
	7025 (106T+26) (High Channel)	6 + 5	* 3.51207	55.94	PK-U	33	-45.2	0	43.74	-	-	88.2	-44.46	352	285	H
			* 3.511194	44.14	ADR	33	-45.12	0.09	32.11	68.2	-36.09	-	-	352	285	H
			* 2.340951	58.26	PK-U	31.8	-47	0	43.06	-	-	74	-30.94	22	388	H
			* 2.340879	46.43	ADR	31.8	-47.01	0.09	31.31	54	-22.69	-	-	22	388	H
			* 3.509819	55.59	PK-U	33	-45.2	0	43.39	-	-	88.2	-44.81	250	127	V
			* 3.508401	44.2	ADR	32.9	-45.2	0.09	31.99	68.2	-36.21	-	-	250	127	V
			* 2.341023	57.77	PK-U	31.8	-47	0	42.57	-	-	74	-31.43	10	357	V
			* 2.341196	46.49	ADR	31.8	-47	0.09	31.38	54	-22.62	-	-	10	357	V
			14.049074	54.57	PK-U	39.1	-42.7	0	50.97	-	-	88.2	-37.23	31	100	H
			14.051642	43.15	ADR	39.1	-42.64	0.09	39.7	68.2	-28.5	-	-	31	100	H
			14.052295	55.17	PK-U	39.1	-42.6	0	51.67	-	-	88.2	-36.53	268	156	H
			14.05216	43.12	ADR	39.1	-42.6	0.09	39.71	68.2	-28.49	-	-	268	156	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL / 6145MHz)

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.708054	45.72	PK-U	32.4	0	-25.95	52.17	-	-	74	-21.83	42	128	H
* 2.687533	34.48	ADR	32.4	0.41	-25.88	41.41	68.2	-26.79	-	-	42	128	H
* 2.682853	46.2	PK-U	32.4	0	-25.84	52.76	-	-	88.2	-35.44	183	380	V
* 2.695538	34.37	ADR	32.4	0.41	-25.85	41.33	54	-12.67	-	-	183	380	V
* 10.769316	56.98	PK-U	37.7	0	-45.39	49.29	-	-	74	-24.71	340	243	H
* 10.790486	45.44	ADR	37.7	0.41	-45.39	38.16	54	-15.84	-	-	340	243	H
* 10.777528	56.84	PK-U	37.7	0	-45.4	49.14	-	-	74	-24.86	90	137	V
* 10.772286	45.53	ADR	37.7	0.41	-45.37	38.27	54	-15.73	-	-	90	137	V
13.530001	43.98	ADR	38.8	0.41	-43.62	39.57	68.2	-28.63	-	-	167	153	V
13.546573	55.54	PK-U	38.8	0	-43.72	50.62	-	-	88.2	-37.58	167	153	V
13.640301	55.43	PK-U	38.8	0	-43.9	50.33	-	-	88.2	-37.87	308	286	H
13.654089	43.86	ADR	38.8	0.41	-43.81	39.26	68.2	-28.94	-	-	308	286	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

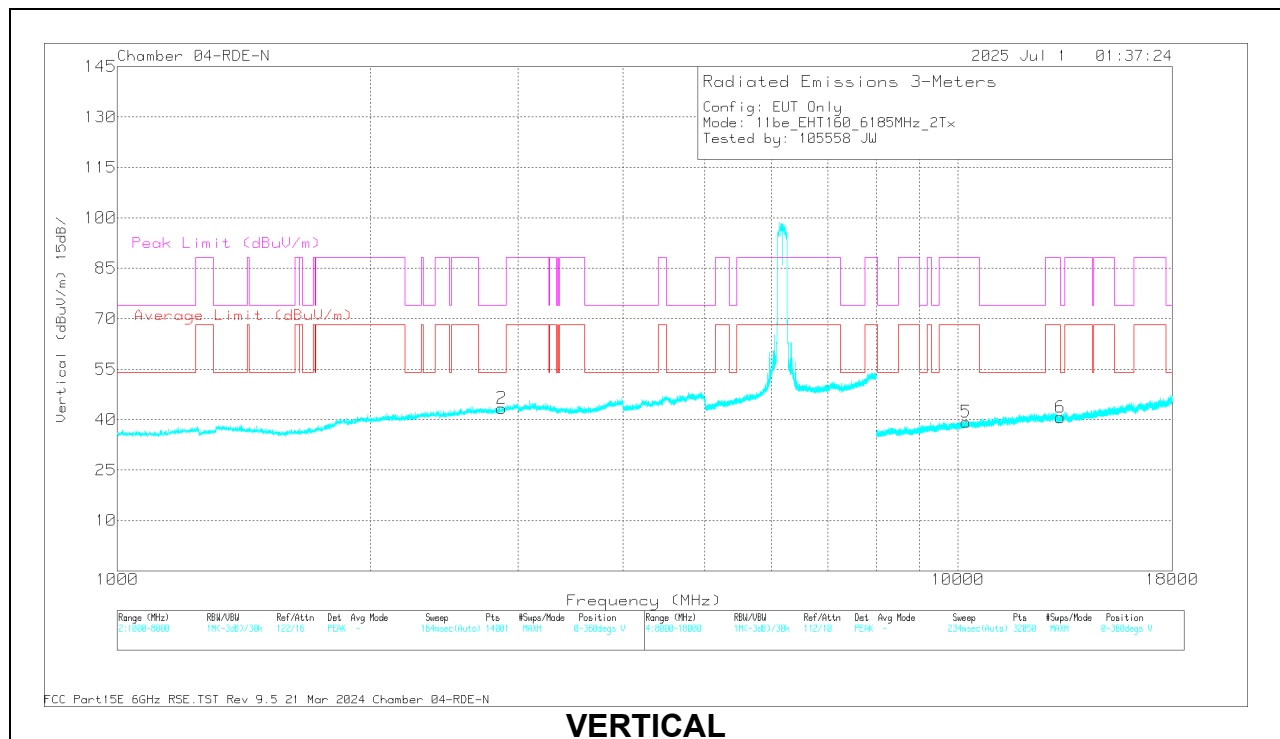
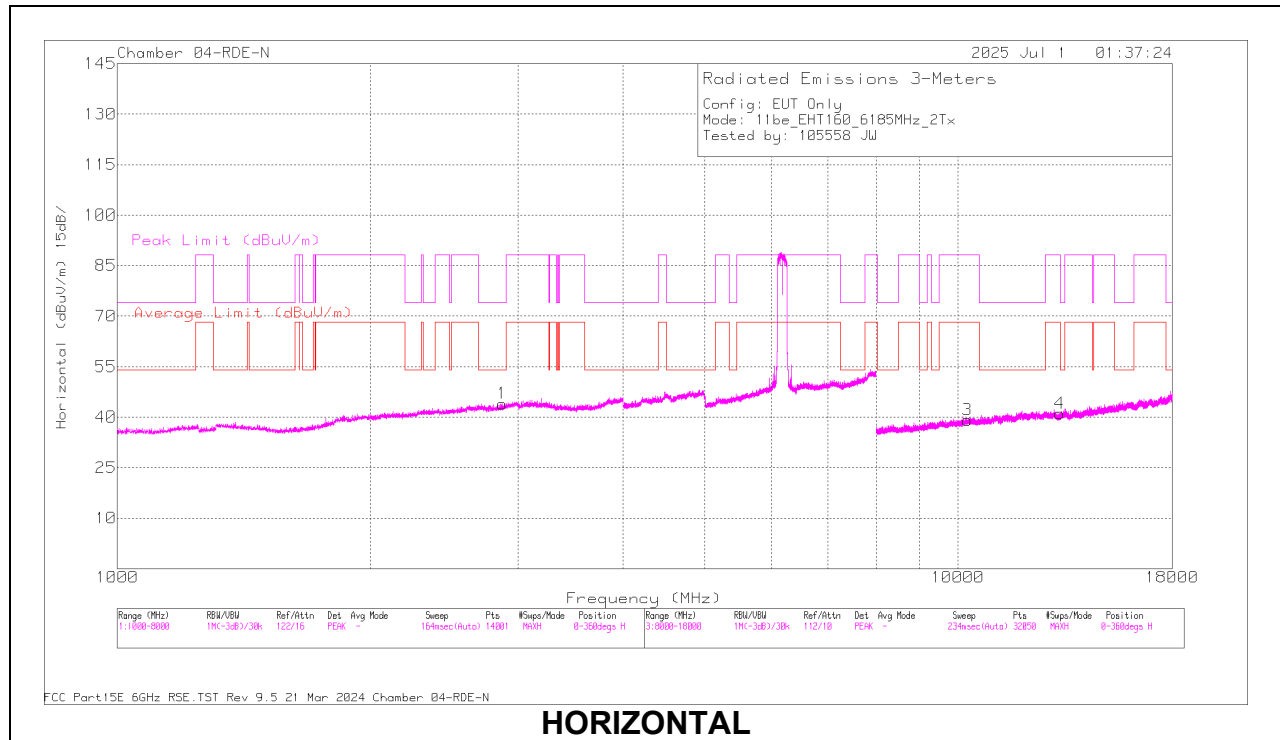
160MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 5	* 2.876134	46.73	PK-U	32.5	-25.8	0	53.43	-	-	74	-20.57	187	377	H
			* 2.881585	34.96	ADR	32.5	-25.81	0.61	42.26	54	-11.74	-	-	187	377	H
			* 2.87134	46.16	PK-U	32.5	-25.83	0	52.83	-	-	74	-21.17	26	337	V
			* 2.885588	34.8	ADR	32.5	-25.88	0.61	42.03	54	-11.97	-	-	26	337	V
			* 13.267274	43.96	ADR	39	-43.66	0.61	39.91	54	-14.09	-	-	198	119	V
			10.227084	56.65	PK-U	37.8	-45.01	0	49.44	-	-	88.2	-38.76	27	120	V
			10.240024	45.16	ADR	37.8	-45.33	0.61	38.24	68.2	-29.96	-	-	27	120	V
			10.282714	45.22	ADR	37.8	-45.42	0.61	38.21	68.2	-29.99	-	-	139	147	H
			10.284219	57.28	PK-U	37.8	-45.45	0	49.63	-	-	88.2	-38.57	139	147	H
			13.218118	55.47	PK-U	38.9	-43.56	0	50.81	-	-	88.2	-37.39	348	200	H
			13.230192	43.63	ADR	38.9	-43.78	0.61	39.36	68.2	-28.84	-	-	348	200	H
			13.244757	55.77	PK-U	39	-43.99	0	50.78	-	-	88.2	-37.42	198	119	V
			2.915329	46.2	PK-U	32.6	-25.78	0	53.02	-	-	88.2	-35.18	126	319	H
			2.921959	34.95	ADR	32.6	-25.68	0.61	42.48	68.2	-25.72	-	-	135	299	V
			2.926982	46.13	PK-U	32.6	-25.72	0	53.01	-	-	88.2	-35.19	135	299	V
	6505 (Mid Channel)	6 + 5	2.951944	34.62	ADR	32.7	-25.75	0.61	42.18	68.2	-26.02	-	-	126	319	H
			10.186282	44.82	ADR	37.7	-45.34	0.61	37.79	68.2	-30.41	-	-	3	144	V
			10.211497	56.22	PK-U	37.8	-44.94	0	49.08	-	-	88.2	-39.12	3	144	V
			10.243457	45.25	ADR	37.8	-45.36	0.61	38.3	68.2	-29.9	-	-	267	382	H
			10.25748	56.85	PK-U	37.8	-45.35	0	49.3	-	-	88.2	-38.9	267	382	H
			13.190877	43.73	ADR	38.9	-43.83	0.61	39.41	68.2	-28.79	-	-	260	145	V
			13.191119	55.45	PK-U	38.9	-43.83	0	50.52	-	-	88.2	-37.68	260	145	V
			13.207114	55.7	PK-U	38.9	-43.65	0	50.95	-	-	88.2	-37.25	49	113	H
			13.231101	43.67	ADR	38.9	-43.77	0.61	39.41	68.2	-28.79	-	-	49	113	H
			* 2.809459	46.62	PK-U	32.4	-26.03	0	52.99	-	-	74	-21.01	247	217	H
	6985 (High Channel)	6 + 5	* 2.82996	34.83	ADR	32.4	-25.94	0.61	41.9	54	-12.1	-	-	247	217	H
			* 2.819281	46.26	PK-U	32.4	-25.92	0	52.74	-	-	74	-21.26	211	243	V
			* 2.82035	34.64	ADR	32.4	-25.93	0.61	41.72	54	-12.28	-	-	211	243	V
			* 10.861306	56.54	PK-U	37.8	-44.98	0	49.36	-	-	74	-24.64	109	199	H
			* 10.8619	45.1	ADR	37.8	-44.98	0.61	38.53	54	-15.47	-	-	109	199	H
			* 10.832126	57.54	PK-U	37.7	-45.36	0	49.88	-	-	74	-24.12	253	118	V
			* 10.813033	45.34	ADR	37.7	-45.31	0.61	38.34	54	-15.66	-	-	253	118	V
			* 13.381053	56.43	PK-U	39	-43.85	0	51.58	-	-	74	-22.42	357	266	V
			* 13.367941	44.17	ADR	39	-43.73	0.61	40.05	54	-13.95	-	-	357	266	V
			13.430802	55.43	PK-U	38.9	-43.2	0	51.13	-	-	88.2	-37.07	354	203	H
11be (Partial RU Mode)	6185 (52T) (Low Channel)	6 + 5	13.431276	44.21	ADR	38.9	-43.19	0.61	40.53	68.2	-27.67	-	-	354	203	H
			2.065322	61.99	PK-U	31.4	-50.69	0	42.7	-	-	88.2	-45.5	15	249	V
			2.068976	50.16	ADR	31.4	-50.71	0	30.85	68.2	-37.35	-	-	15	249	V
			2.070795	61.7	PK-U	31.4	-50.72	0	42.38	-	-	88.2	-45.82	140	254	H
			2.071941	50.29	ADR	31.4	-50.71	0	30.98	68.2	-37.22	-	-	140	254	H
			3.089478	47.69	ADR	33	-48.84	0	31.85	68.2	-36.35	-	-	231	321	H
			3.089761	47.61	ADR	33	-48.86	0	31.75	68.2	-36.45	-	-	325	244	V
			3.090484	59.49	PK-U	33	-48.86	0	43.63	-	-	88.2	-44.57	231	321	H
			3.091016	58.81	PK-U	33	-48.84	0	42.97	-	-	88.2	-45.23	325	244	V
			* 12.354814	43.79	ADR	38.9	-43.57	0	39.12	54	-14.88	-	-	240	194	V
			* 12.35861	56.1	PK-U	38.9	-43.45	0	51.55	-	-	74	-22.45	240	194	V
			* 12.36015	55.78	PK-U	38.9	-43.43	0	51.25	-	-	74	-22.75	115	300	H
			* 12.362001	43.87	ADR	38.9	-43.47	0	39.3	54	-14.7	-	-	115	300	H
	6505 (52T) (Mid Channel)	6 + 5	* 2.677728	46.32	PK-U	32.4	-25.99	0	52.73	-	-	88.2	-35.47	100	100	H
			* 2.678754	34.74	ADR	32.4	-25.98	0	41.16	68.2	-27.04	-	-	100	100	H
			* 2.679395	46.39	PK-U	32.4	-25.96	0	52.83	-	-	88.2	-35.37	120	201	V
			* 2.675227	34.67	ADR	32.4	-26.03	0	41.04	68.2	-27.16	-	-	120	201	V
			* 13.393031	56.13	PK-U	39	-43.56	0	51.57	-	-	74	-22.43	95	393	V
			10.297097	45.53	ADR	37.8	-45.66	0	37.67	68.2	-30.53	-	-	170	183	V
			10.30805	45.39	ADR	37.8	-45.71	0	37.48	68.2	-30.72	-	-	140	105	H
			10.309547	57.14	PK-U	37.8	-45.7	0	49.24	-	-	88.2	-38.96	140	105	H
			10.310576	57.06	PK-U	37.8	-45.72	0	49.14	-	-	88.2	-39.06	170	183	V
			13.409979	44.64	ADR	39	-43.27	0	40.37	68.2	-27.83	-	-	95	393	V
	6985 (52T) (High Channel)	6 + 5	13.410299	44.3	ADR	39	-43.26	0	40.04	68.2	-28.16	-	-	160	150	H
			13.417406	56.16	PK-U	39	-43.19	0	51.97	-	-	88.2	-36.23	160	150	H
			* 2.769405	48.09	ADR	32.3	-49.62	0	30.77	54	-23.23	-	-	166	348	H
			* 2.77024	59.55	PK-U	32.3	-49.63	0	42.22	-	-	74	-31.78	166	348	H
			* 2.770438	47.66	ADR	32.3	-49.63	0	30.33	54	-23.67	-	-	138	365	V
			* 2.770737	59.14	PK-U	32.3	-49.64	0	41.8	-	-	74	-32.2	138	365	V
			* 4.202031	45.62	ADR	33.9	-47.34	0	32.18	54	-21.82	-	-	189	228	V
			* 4.203332	57.4	PK-U	33.9	-47.37	0	43.93	-	-	74	-30.07	189	228	V
			* 4.205601	45.61	ADR	33.9	-47.42	0	32.09	54	-21.91	-	-	120	383	H
			* 4.206704	57.35	PK-U	33.9	-47.38	0	43.87	-	-	74	-30.13	120	383	H
			* 12.064316	44.06	ADR	38.9	-43.57	0	39.39	54	-14.61	-	-	47	106	V
			* 12.064377	55.86	PK-U	38.9	-43.57	0	51.19	-	-	74	-22.81	47	106	V
			* 12.066279	56.18	PK-U	38.9	-43.51	0	51.57	-	-	74	-22.43	20	210	H
			* 12.067016	44.24	ADR	38.9	-43.44	0	39.7	54	-14.3	-	-	20	210	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HARMONICS AND SPURIOUS EMISSIONS – MIMO SU CDD MODE (HIGH CHANNEL / 6185MHz)

RADIATED EMISSIONS

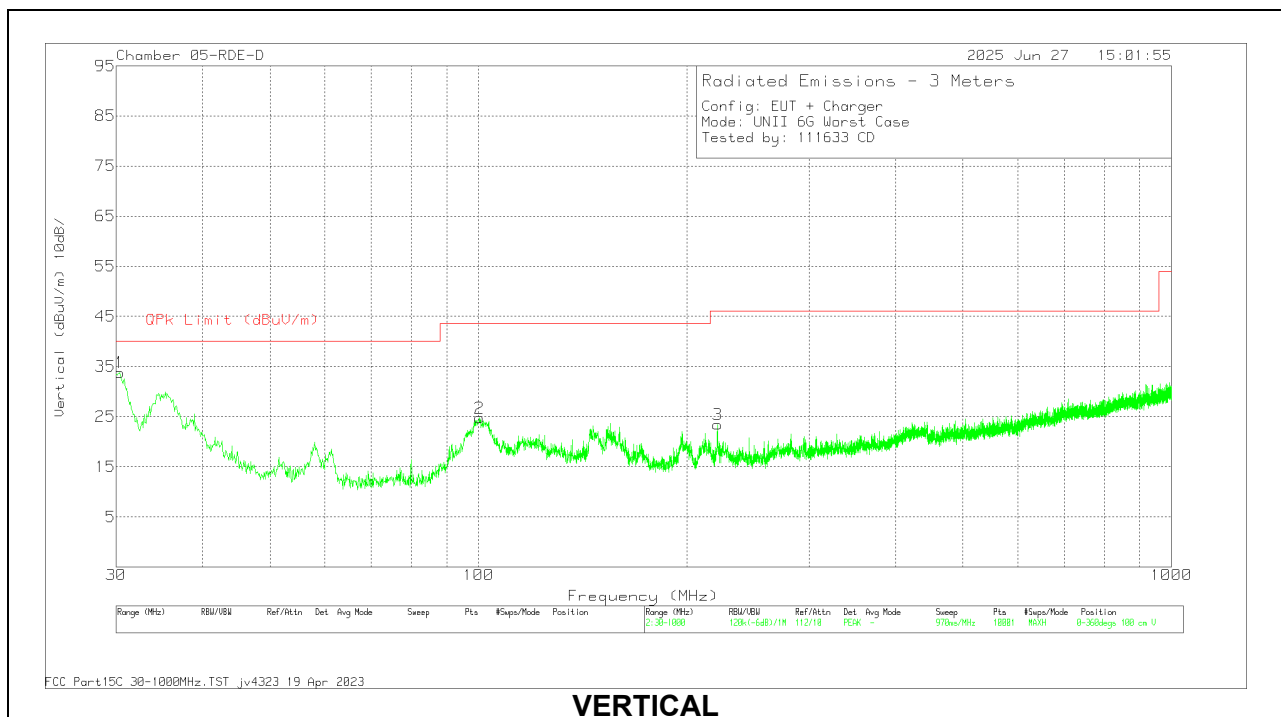
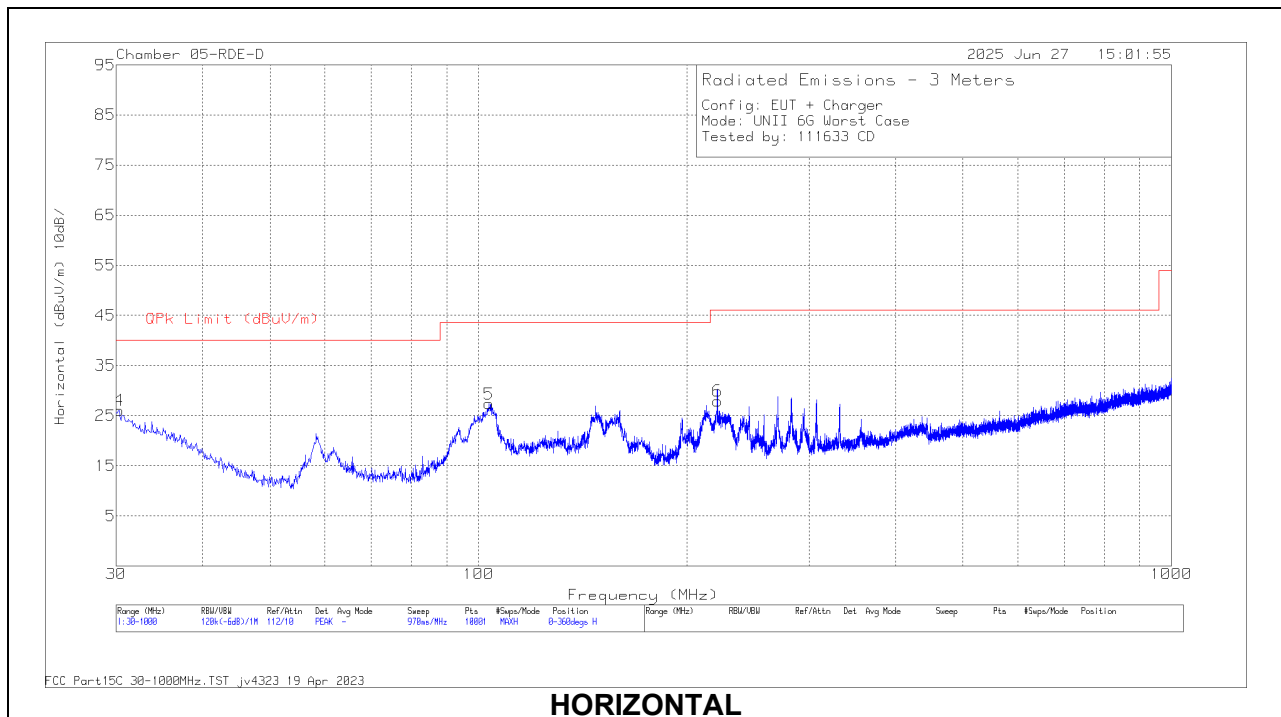
Frequency (GHz)	Meter Reading (dBuV)	Dot	41112 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.876134	46.73	PK-U	32.5	0	-25.8	53.43	-	-	74	-20.57	187	377	H
* 2.881585	34.96	ADR	32.5	0.61	-25.81	42.26	54	-11.74	-	-	187	377	H
* 2.87134	46.16	PK-U	32.5	0	-25.83	52.83	-	-	74	-21.17	26	337	V
* 2.885588	34.8	ADR	32.5	0.61	-25.88	42.03	54	-11.97	-	-	26	337	V
* 13.267274	43.96	ADR	39	0.61	-43.66	39.91	54	-14.09	-	-	198	119	V
10.227084	56.65	PK-U	37.8	0	-45.01	49.44	-	-	88.2	-38.76	27	120	V
10.240024	45.16	ADR	37.8	0.61	-45.33	38.24	68.2	-29.96	-	-	27	120	V
10.282714	45.22	ADR	37.8	0.61	-45.42	38.21	68.2	-29.99	-	-	139	147	H
10.284219	57.28	PK-U	37.8	0	-45.45	49.63	-	-	88.2	-38.57	139	147	H
13.218118	55.47	PK-U	38.9	0	-43.56	50.81	-	-	88.2	-37.39	348	200	H
13.230192	43.63	ADR	38.9	0.61	-43.78	39.36	68.2	-28.84	-	-	348	200	H
13.244757	55.77	PK-U	39	0	-43.99	50.78	-	-	88.2	-37.42	198	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz

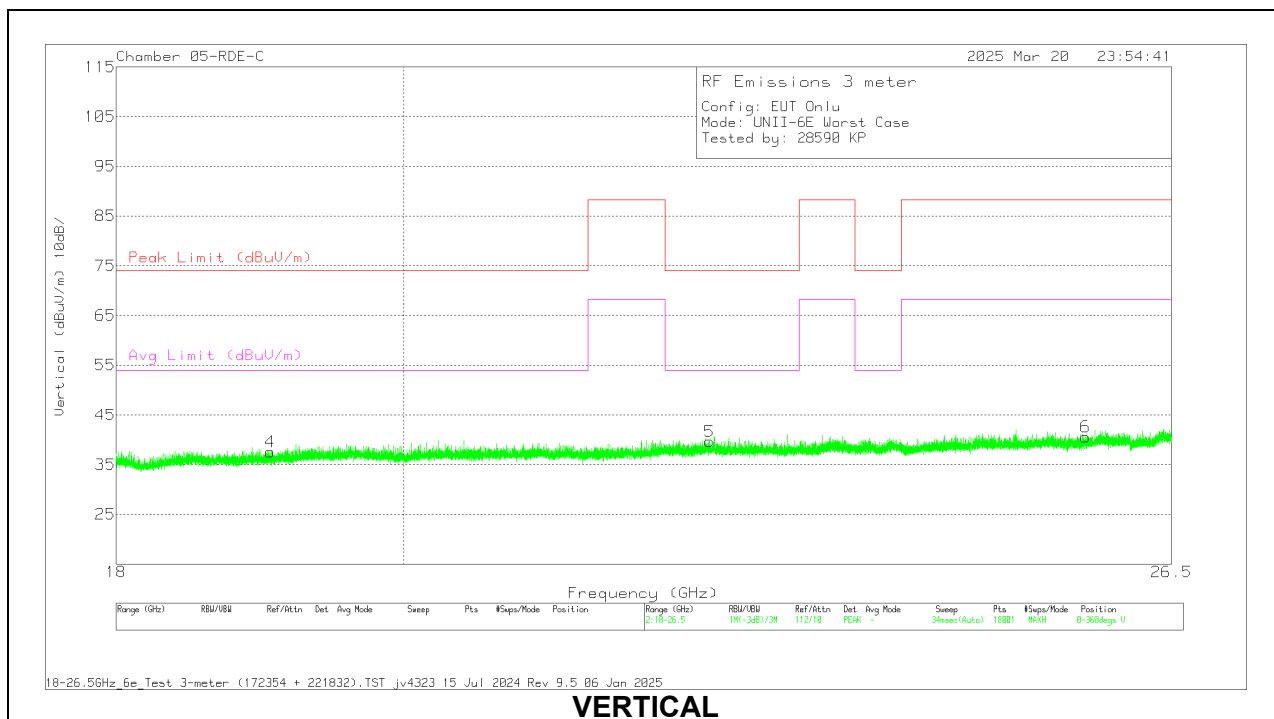
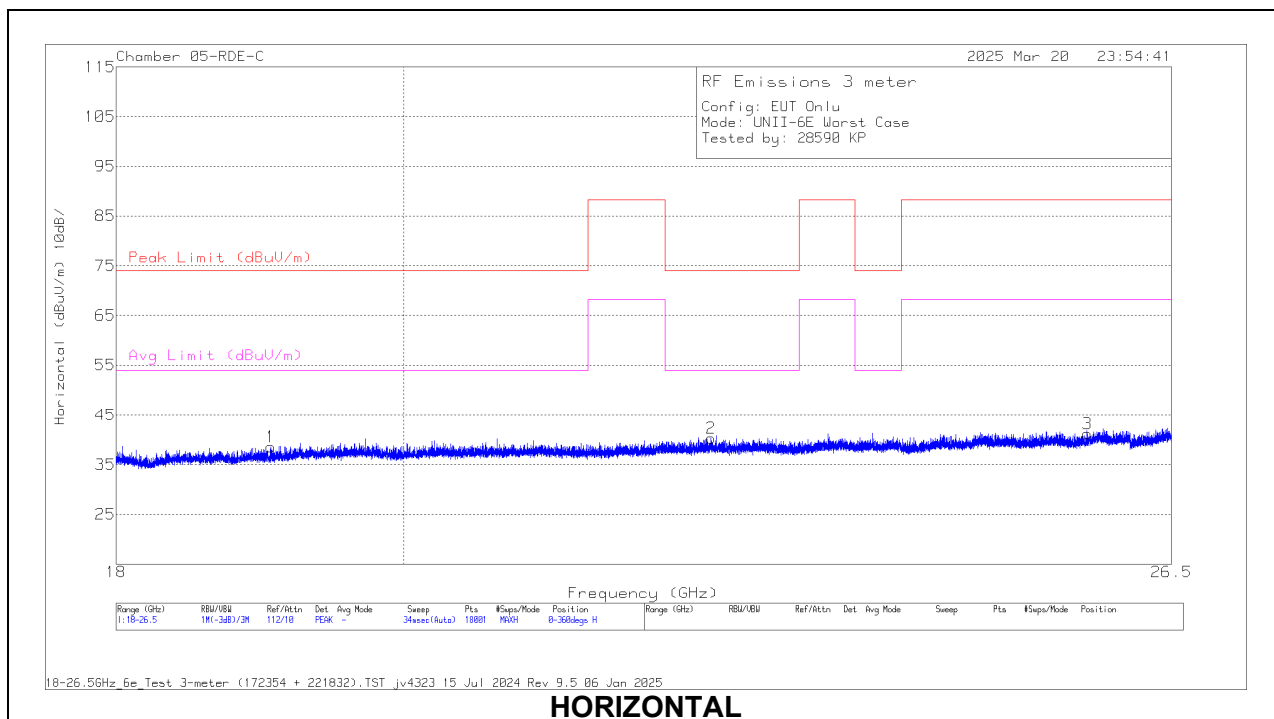


RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80714 ACF (dB/m)	CBL AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)
4	30.2098	24.49	Qp	26.6	-32.2	18.89	40	-21.11	62	117
1	30.4292	35.53	Qp	26.4	-32.2	29.73	40	-10.27	344	102
2	100.307	35.59	Qp	16.3	-31.3	20.59	43.52	-22.93	184	101
5	103.6	38.84	Qp	17.3	-31.6	24.54	43.52	-18.98	109	290
3	220.988	36.21	Qp	16.5	-31.2	21.51	46.02	-24.51	81	182
6	220.995	42.64	Qp	16.5	-31.2	27.94	46.02	-18.08	132	111

Qp – Quasi-Peak detector

1.4. WORST CASE 18-26 GHz

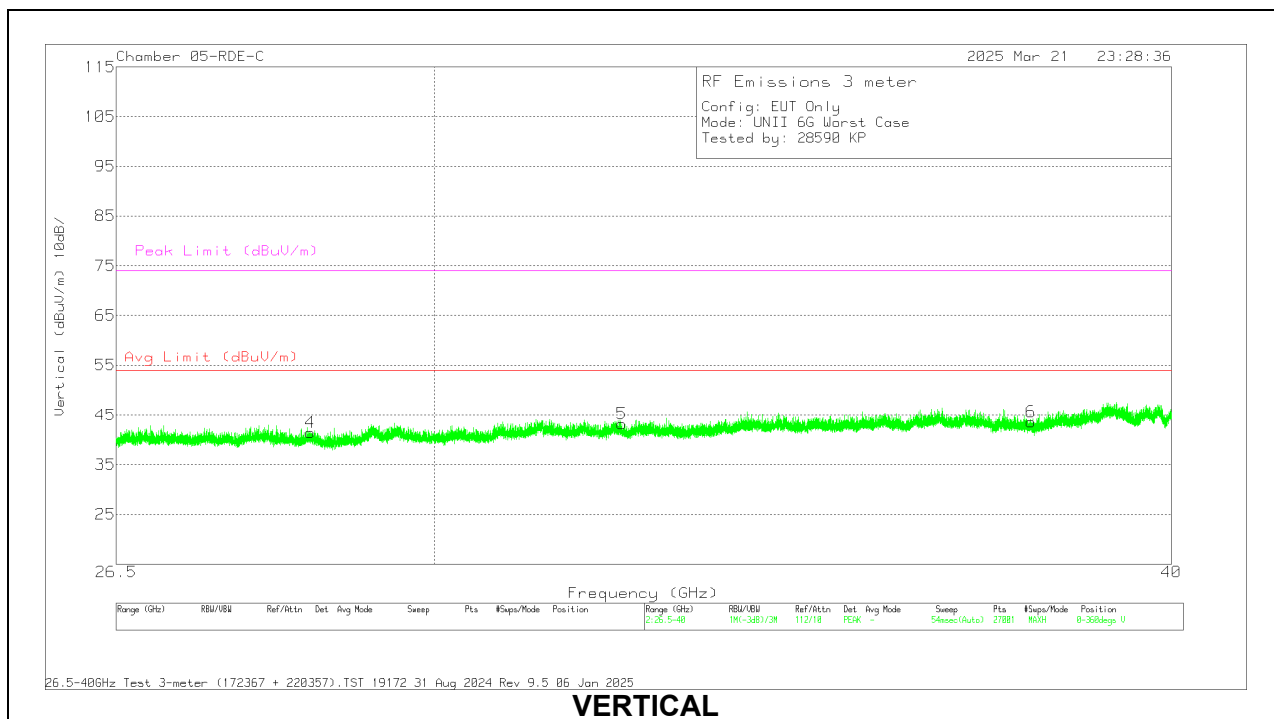
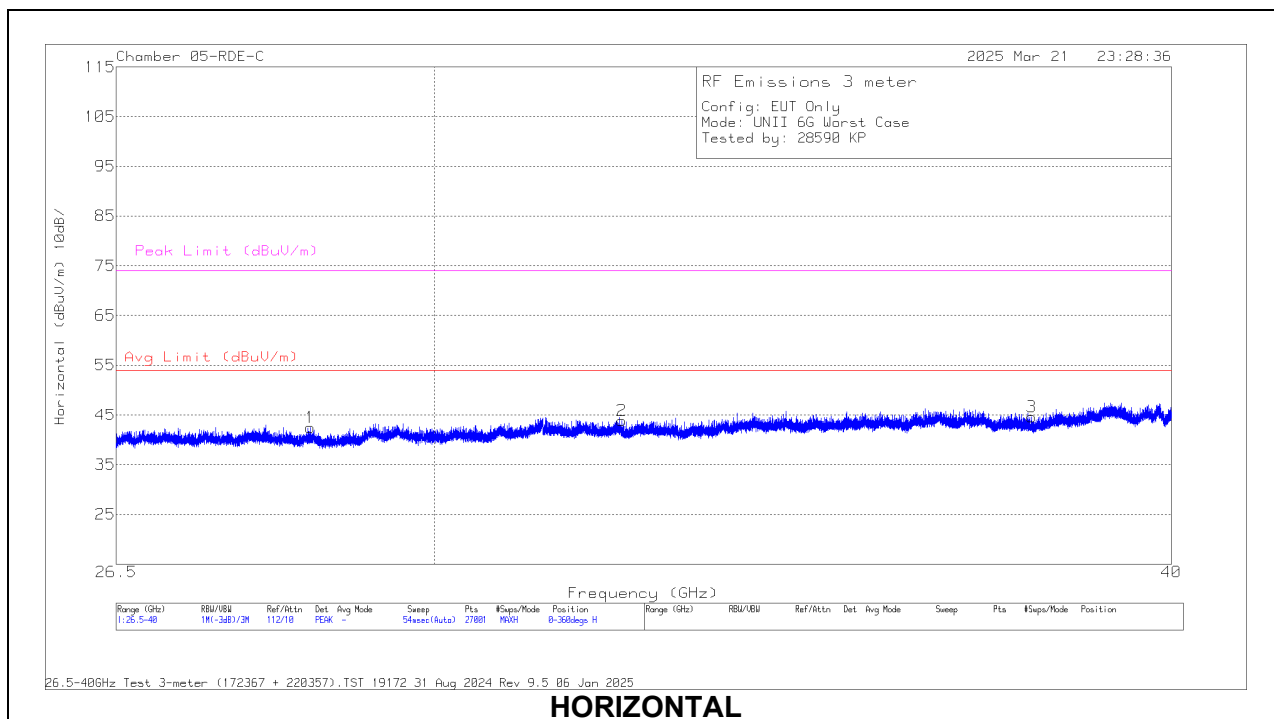


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172354 AF (dB/m)	18-26GHz Amp (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19.051342	56.74	PK-U	32.4	-62.9	13.2	39.44	74	-34.56	-	-	2	101	H
2	* 22.38541	56.4	PK-U	33.2	-62.2	14.3	41.7	74	-32.3	-	-	2	101	H
3	25.695491	55.11	PK-U	33.8	-61.3	15.2	42.81	-	-	-	-	2	198	H
4	* 19.046985	56.65	PK-U	32.4	-62.9	13.2	39.35	74	-34.65	-	-	2	101	V
5	* 22.374167	56.98	PK-U	33.1	-62.2	14.3	42.18	74	-31.82	-	-	2	101	V
6	25.677018	55.25	PK-U	33.8	-61.3	15.2	42.95	-	-	-	-	2	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak

1.5. WORST CASE 26-40 GHz



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172367 ACF (dB/m)	CBL AMP (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.584818	55.15	PK-U	36	-64	16.3	43.45	-	-	74	-30.55	360	101	H
2	32.277178	51.92	PK-U	36.7	-61.2	17.6	45.02	-	-	74	-28.98	360	101	H
3	37.877557	54.94	PK-U	37.6	-65.1	19.5	46.94	-	-	74	-27.06	360	101	H
4	28.580712	54.93	PK-U	36	-64	16.3	43.23	-	-	74	-30.77	360	101	V
5	32.279285	52.14	PK-U	36.7	-61.2	17.6	45.24	-	-	74	-28.76	360	101	V
6	37.868251	55.4	PK-U	37.6	-65	19.5	47.5	-	-	74	-26.5	360	101	V

PK-U - U-NII: Maximum Peak

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

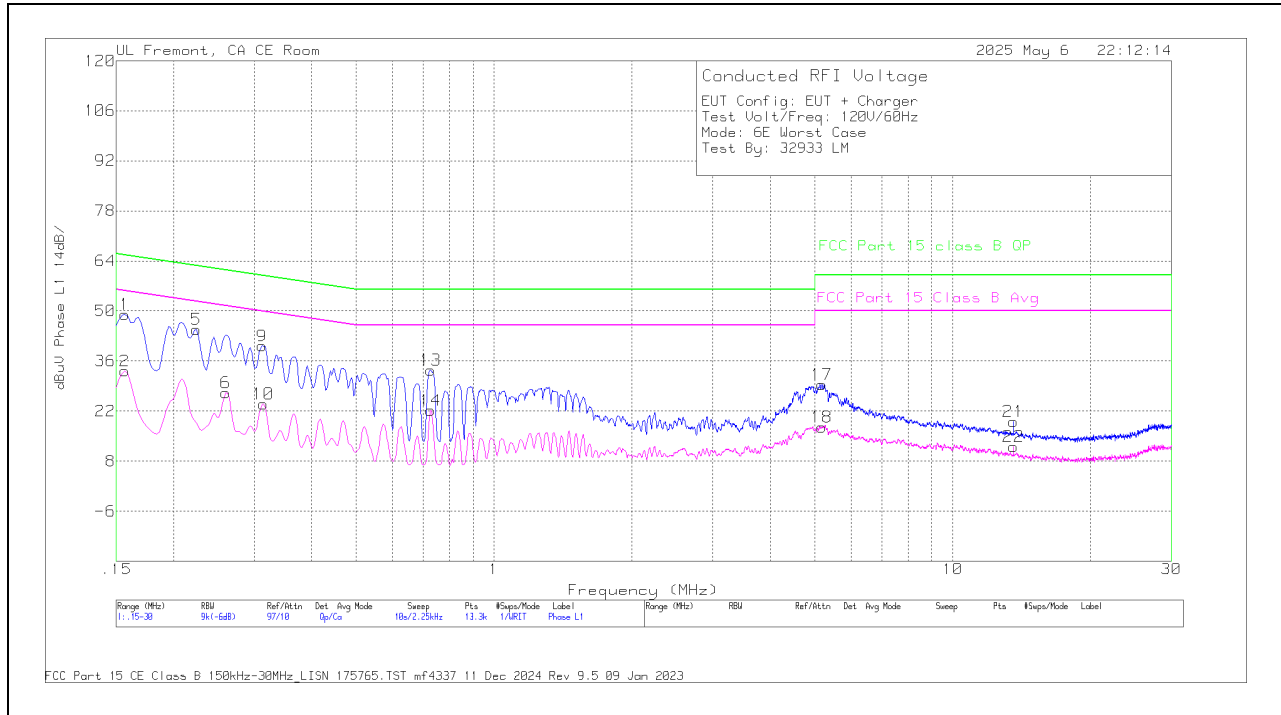
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

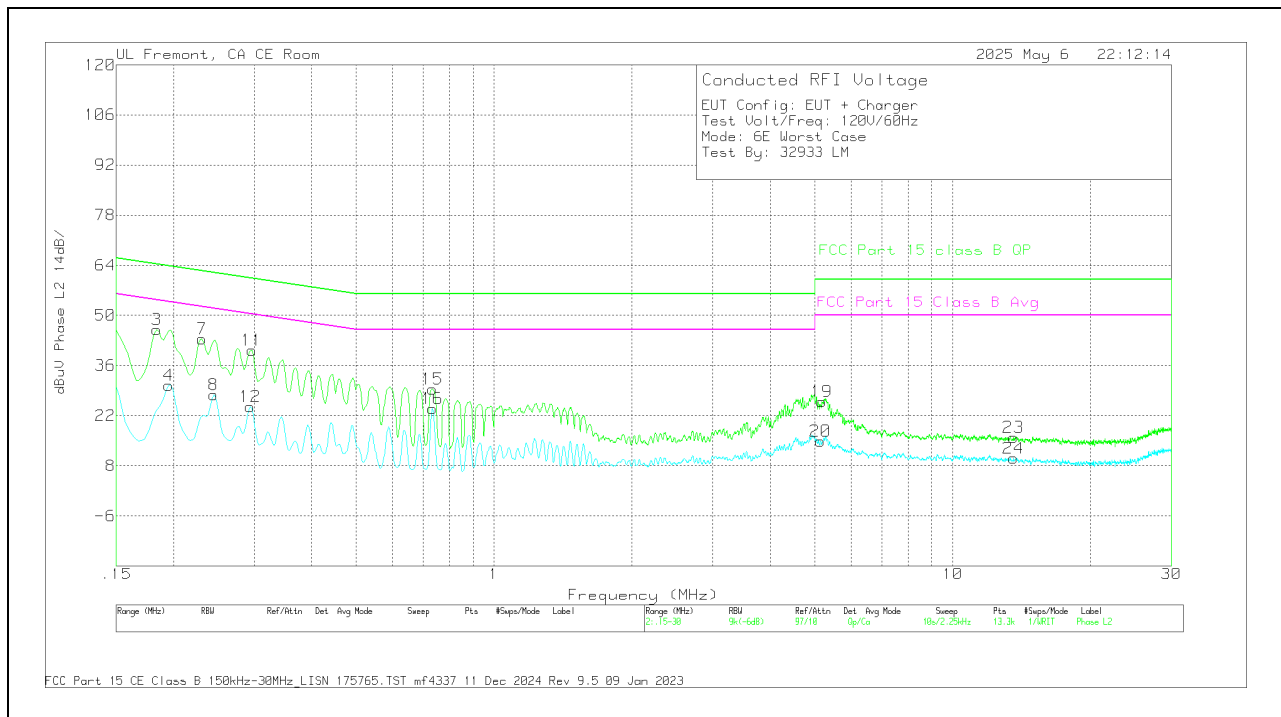
2.1. EUT WITH AC ADAPTER

LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
2	.1568	14.19	Ca	.4	.1	8.5	10	33.19	55.63	-22.44	-	-
6	.2603	9	Ca	-.1	0	8.2	10	27.1	51.42	-24.32	-	-
10	.3143	5.98	Ca	-.1	0	8.1	10	23.98	49.86	-25.88	-	-
14	.7283	3.65	Ca	.1	0	8.4	10	22.15	46	-23.85	-	-
18	5.1878	-.72	Ca	0	0	8.2	10	17.48	50	-32.52	-	-
22	13.56	-6.44	Ca	.2	.1	8.2	10	12.06	50	-37.94	-	-
1	.1568	30.08	Qp	.4	.1	8.5	10	49.08	-	-	65.63	-16.55
5	.2243	26.55	Qp	0	0	8.3	10	44.85	-	-	62.66	-17.81
9	.312	22.19	Qp	-.1	0	8.1	10	40.19	-	-	59.92	-19.73
13	.7283	14.95	Qp	.1	0	8.4	10	33.45	-	-	56	-22.55
17	5.1844	11.07	Qp	.1	0	8.2	10	29.37	-	-	60	-30.63
21	13.56	.59	Qp	.2	.1	8.2	10	19.09	-	-	60	-40.91

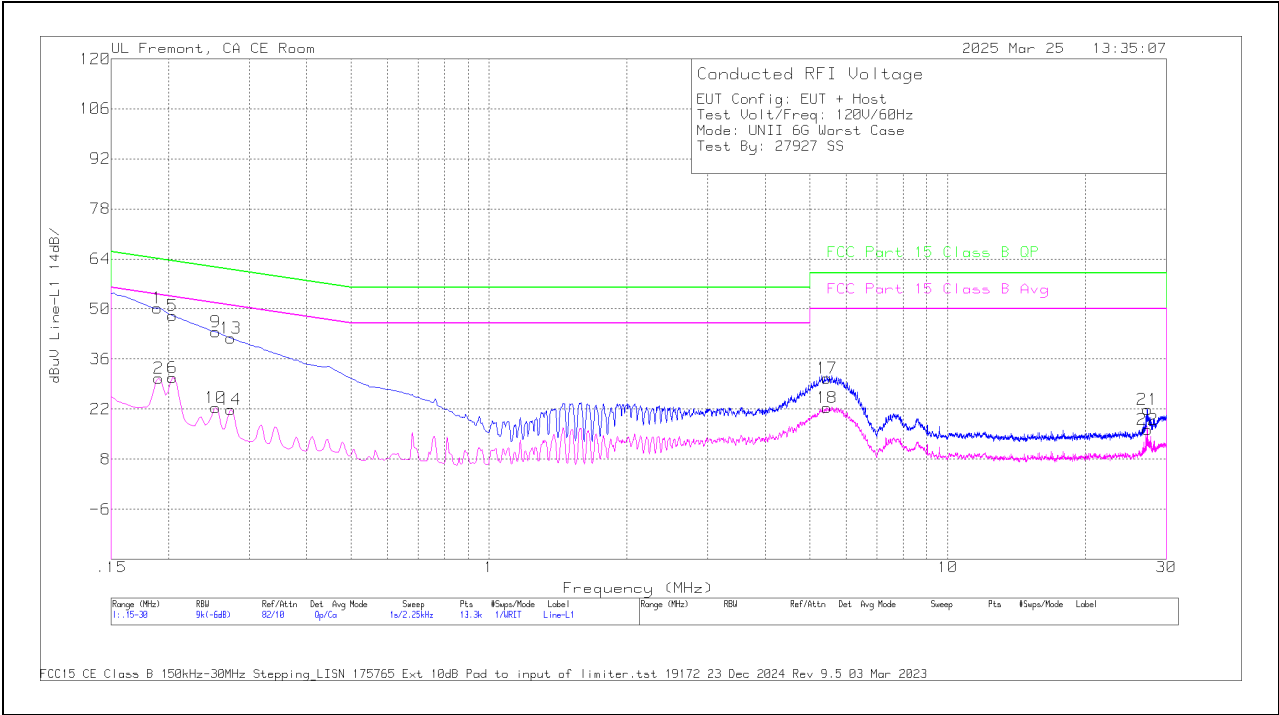
LINE 2 RESULTS



Range 2: Phase L2 15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL(dB)	LISN (dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C Avg (dBuV)	Margin (dB)	FCC Part 15C QP (dBuV)	QP Margin (dB)
4	.195	12	Ca	.1	0	8.4	10	30.5	53.82	-23.32	-	-
8	.2445	9.69	Ca	-.1	0	8.2	10	27.79	51.94	-24.15	-	-
12	.294	6.46	Ca	0	0	8	10	24.46	50.41	-25.95	-	-
16	.735	5.36	Ca	.1	0	8.5	10	23.96	46	-22.04	-	-
20	5.1518	-3.64	Ca	.2	0	8.3	10	14.86	50	-35.14	-	-
24	13.56	-8.44	Ca	.2	.1	8.2	10	10.06	50	-39.94	-	-
3	.1838	27.41	Qp	.2	0	8.4	10	46.01	-	-	64.31	-18.3
7	.231	25.07	Qp	0	0	8.3	10	43.37	-	-	62.41	-19.04
11	.2963	22.25	Qp	0	0	8	10	40.25	-	-	60.35	-20.1
15	.735	10.78	Qp	.1	0	8.5	10	29.38	-	-	56	-26.62
19	5.1855	7.59	Qp	.1	0	8.2	10	25.89	-	-	60	-34.11
23	13.56	-2.52	Qp	.2	.1	8.2	10	15.98	-	-	60	-44.02

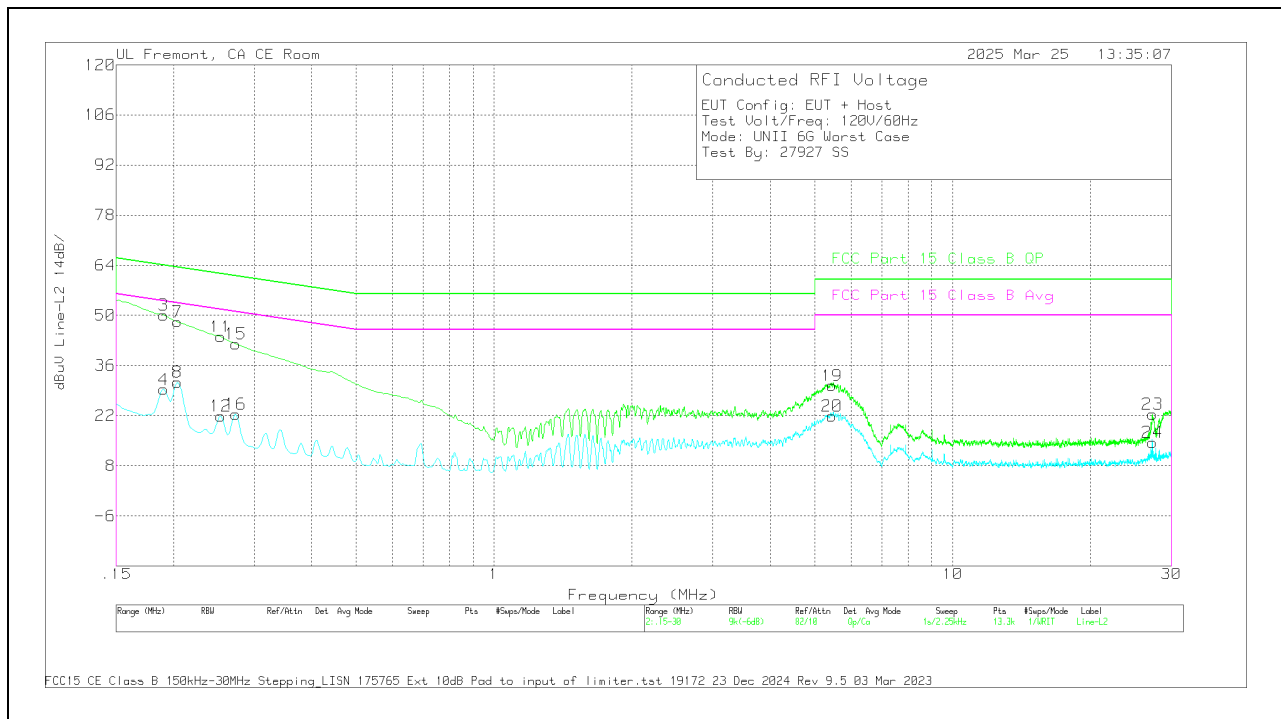
2.2. EUT WITH LAPTOP

LINE 1 RESULTS



Range 1: Line-L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	CBL(dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av Margin (dB)
2	.1905	11.9	Ca	.1	.2	8.4	10	30.6	-	-	54.01	-23.41
6	.204	12.25	Ca	0	.1	8.4	10	30.75	-	-	53.45	-22.7
10	.2535	4.35	Ca	0	-.1	8.2	10	22.45	-	-	51.64	-29.19
14	.2738	3.92	Ca	0	-.1	8.1	10	21.92	-	-	51	-29.08
18	5.4578	3.83	Ca	0	.1	8.4	10	22.33	-	-	50	-27.67
22	27.285	-2.91	Ca	.2	.4	8.6	10	16.29	-	-	50	-33.71
1	.1894	31.59	Qp	.1	.2	8.4	10	50.29	64.06	-13.77	-	-
5	.204	29.69	Qp	0	.1	8.4	10	48.19	63.45	-15.26	-	-
9	.2535	25.52	Qp	0	-.1	8.2	10	43.62	61.64	-18.02	-	-
13	.2738	23.86	Qp	0	-.1	8.1	10	41.86	61	-19.14	-	-
17	5.4578	12.13	Qp	0	.1	8.4	10	30.63	60	-29.37	-	-
21	27.285	2.68	Qp	.2	.4	8.6	10	21.88	60	-38.12	-	-

LINE 2 RESULTS



Range 2: Line-L2 15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	CBL(dB)	CBL(dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15C QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg (dBuV)	Av Margin (dB)
4	.1905	10.82	Ca	0	.1	8.4	10	29.32	-	-	54.01	-24.69
8	.204	12.91	Ca	0	0	8.4	10	31.31	-	-	53.45	-22.14
12	.2535	3.44	Ca	0	.2	8.2	10	21.84	-	-	51.64	-29.8
16	.2738	4.15	Ca	0	.1	8.1	10	22.35	-	-	51	-28.65
20	5.4578	3.1	Ca	0	.4	8.4	10	21.9	-	-	50	-28.1
24	27.285	-4.62	Ca	.2	.3	8.6	10	14.48	-	-	50	-35.52
3	.1905	31.61	Qp	0	.1	8.4	10	50.11	64.01	-13.9	-	-
7	.204	29.84	Qp	0	0	8.4	10	48.24	63.45	-15.21	-	-
11	.2535	25.65	Qp	0	.2	8.2	10	44.05	61.64	-17.59	-	-
15	.2738	23.88	Qp	0	.1	8.1	10	42.08	61	-18.92	-	-
19	5.4578	11.58	Qp	0	.4	8.4	10	30.38	60	-29.62	-	-
23	27.285	3.33	Qp	.2	.3	8.6	10	22.43	60	-37.57	-	-

3. SETUP PHOTOS

Refer to 15496240-EP1 report for Setup_Photos

END OF TEST REPORT