

## 10. DUAL CLIENT TEST/ CLIENT DEVICE - POWER ADJUSTMENT

### LIMITS

FCC §15.407(a) (7), (8)

(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(8) For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

### **(II) (K) . Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP**

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP. If a client has the flexibility to connect to both APs, verification is needed to show that it can distinguish between the two configurations, and then control the power levels accordingly.

### **(II) (L). Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point**

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

### TEST PROCEDURE

Per KDB 987594 D02 (II) (K) and (II) (L)

### SET UP

The following setup shown in section 6.6 was used as an alternate method to meet requirements for sections (II)(K) and (II)(L) for a dual client device. It verifies EUT ability to distinguish between an LPI AP and SP AP and operate at the power level permitted for each.

## RESULTS FOR DUAL CLIENT TEST

<b>Tested By:</b>	GA 12485
<b>Date:</b>	2025-05-30

EUT Frequency (MHz)	AFC Authorized EIRP Power for AP (dBm)	Dual Client MIMO EIRP (dBm)	Results (Pass/Fail) (EUT-AFC Authorized AP Power <= -6dB)
5975	36	18.59	Pass
	28	18.61	Pass
	21	14.66	Pass

The plot below demonstrates the EUT's ability to distinguish between SP mode and LP mode connections, and to reduce power when transitioning from standard client mode to LPI client mode.

The EUT is connected to an AP simulator as an SP client. After 9 seconds, the simulator switches to LP AP mode. The EUT's power is measured in SP client mode at Marker 1, and again after transitioning to LP client mode at Marker 2. The delta between Marker 2 and Marker 1 is  $\geq -6$  dB, demonstrating the EUT's ability to reduce power when switching from SP mode to LP mode.



## 11. VERY LOW POWER TRANSMIT POWER CONTROL (TPC)

### LIMITS

FCC §15.407 (d) (10)

(10) Very low power devices operating in the 5.925-7.125 GHz band shall employ a transmit power control (TPC) mechanism. A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/ MHz.

### TEST PROCEDURE

1. Configure EUT and companion device for peer-to-peer communication (refer to block diagram in section 6.6)
2. Set variable attenuator to 0dB (noise free spectral environment, low RSSI simulation)
3. Establish a link and start communication between EUT and companion device
4. Capture PSD spectrum analyzer trace (2)
5. Set variable attenuator to 40dB (noisy spectral environment, high RSSI simulation)
6. Capture PSD spectrum analyzer trace (1)
7. For MIMO operations use the sum of the highest PSD from each individual antenna

SA Settings: 1MHz RBW/ 3MHz VBW

Span: 240MHz

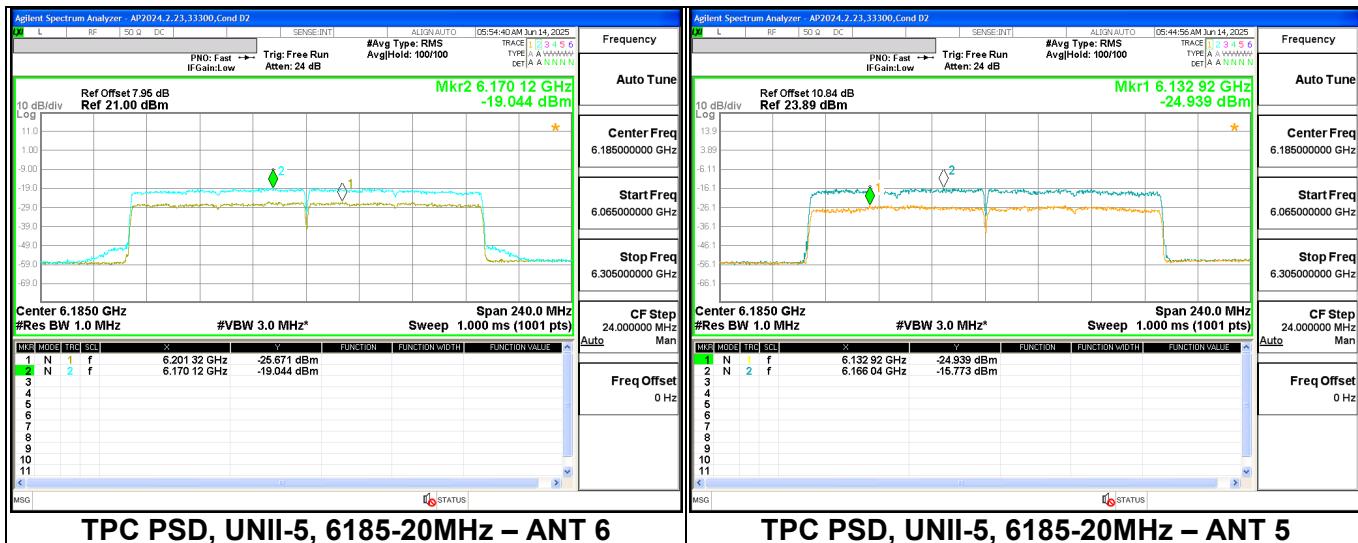
Sweep: 1ms, trace averaging enabled for 100 sweeps with RMS detector enabled.

**RESULTS**

<b>Test Engineer:</b>	GA 12485
<b>Test Date:</b>	2025-06-14

2TX		UNII-5 band						
Correlated Directional Gain (dBi)	3.16	ANT 6			ANT 5		ANT 6+ANT 5	
DCCF (dB)	0.61	Trace 2	Trace 1	Trace 2	Trace 1	2Tx	2Tx	
BW (MHz)	Frequency (MHz)	Low RSSI PSD (dBm/MHz)	High RSSI PSD (dBm/MHz)	Low RSSI PSD (dBm/MHz)	High RSSI PSD (dBm/MHz)	Low RSSI EIRP PSD (dBm/MHz)	High RSSI EIRP PSD (dBm/MHz)	
20	6185 (CH47)	-19.44	-25.671	-15.773	-24.939	-10.45	-18.51	

The antenna gain is correlated gain used for the CDD MIMO mode. The device is compliant with the 2Tx Low RSSI EIRP PSD is less than -11dBm/MHz.

**VLP TPC POWER LEVEL REDUCTION**

---

## 12. SETUP PHOTOS

Refer to 15496245-EP1V1FCC IC Setup\_Photo for setup photos.

## APPENDIX A – SPOT CHECK EVALUATION

### MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3522, A3523 and A3524.

Three models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except feature differences/sim support as indicated below which caused antenna gain changed as documented in section 6.5.4 of the report and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3522	BCG-E8957A	579C-E8957A	-Without FR2 -Added B11/21 -No UL MIMO	eSIM	-
A3523	BCG-E8958A	579C-E8958A	-Without FR2 -No LTE/5GNR B14/29/71 -No LTE B11/21 -No UL MIMO	eSIM+pSIM	A3522
A3524	BCG-E8959A	579C-E8959A	-Without FR2 -No LTE/5GNR B14/29/71 -No LTE B11/21 -With UL MIMO (n41/78/79) -No MSS / 5GNR B53	pSIM+pSIM	

The spot check plan allows for data reuse from the reference model where the variant models data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dB} = | V_{dB} - R_{dB} | \quad (1)$$

$$d_{dB} \leq d_{dBmax} \quad (2)$$

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where  $d_{dB}$  is deviation between the variant and the reference model,  $V_{dB}$  is variant spot check level,  $R_{dB}$  is the corresponding reference measurement level,  $d_{dBmax}$  is the maximum deviation  $d_{dB}$  allowed, and  $M_{dB}$  is the margin in dB.

**SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3523**

A3523 SPOT CHECK RESULTS												
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Original Model: A3522	Variant Model: A3523	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E8957A IC : 579C-E8957A	FCC ID : BCG-E8958A IC : 579C-E8958A			
6CD/6VL UNII-5/6/7/8	5955-6415 (UNII-5)	11be EHT80 SU (ANT6), SP	MCS0	Avg Power EIRP (dBm)	Fundamental	7	5.985	23.07	22.60	-0.47	-6.93	Note 1
		11be EHT80 SU (ANT6), SP	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge	7	5.985	-29.02	-29.64	-0.62	-2.02	Note 1
		11be EHT20, SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	1	5.955	Noise floor only	Noise floor only	-	-	-
	6435-6515 (UNII-6)	11be EHT160, SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	111	6.505	Noise floor only	Noise floor only	-	-	-
		11be EHT160, SU (ANT6), VLP	MCS0	Avg Power EIRP (dBm)	Fundamental	175	6.825	12.97	12.74	-0.23	-1.03	Note 1
	6895-7115 (UNII-8)	11be EHT40 SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	123	6.565	Noise floor only	Noise floor only	-	-	-
		11be EHT40 SU (ANT6), LP	MCS0	Avg Power EIRP (dBm)	Fundamental	227	7.085	12.32	11.88	-0.44	-11.68	Note 1
		11be EHT40 SU (ANT6), LP	MCS11	Radiated Bandedge (dBm)	Horizontal High Bandedge	227	7.085	-29.73	-29.69	0.04	-2.73	Note 1
	11be EHT160, SU MIMO, Dual client	MCS0	Radiated 1-18G (dBm)	RSE	207	6.985	Noise floor only	Noise floor only	-	-	-	-

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

**SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3524**

A3524 SPOT CHECK RESULTS												
Equipment Class/ Technologies	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Reference Model: A3522	Variant Model: A3524	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E8957A IC : 579C-E8957A	FCC ID : BCG-E8959A IC : 579C-E8959A			
6CD/6VL UNII-5/6/7/8	5955 - 6415 UNII-5	11be EHT80 SU (ANT6), SP	MCS0	Avg Power EIRP (dBm)	Fundamental	7	5.985	23.07	22.60	-0.47	-6.93	Note 1
		11be EHT80 SU (ANT6), SP	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge	7	5.985	-29.02	-29.43	-0.41	-2.02	Note 1
		11be EHT20, SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	1	5.955	Noise floor only	Noise floor only	-	-	-
	6435 - 6515 UNII-6	11be EHT160, SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	111	6.505	Noise floor only	Noise floor only	-	-	-
		11be EHT160, SU (ANT6), VLP	MCS0	Avg Power EIRP (dBm)	Fundamental	175	6.825	12.97	12.81	-0.16	-1.03	Note 1
	6895 - 6875 UNII-7	11be EHT40, SU MIMO, Dual Client	MCS0	Radiated 1-18G (dBm)	RSE	123	6.565	Noise floor only	Noise floor only	-	-	-
		11be EHT40, SU (ANT6), LP	MCS0	Avg Power EIRP (dBm)	Fundamental	227	7.085	12.32	11.85	-0.47	-11.68	Note 1
		11be EHT40, SU (ANT6), LP	MCS11	Radiated Bandedge (dBm)	Horizontal High Bandedge	227	7.085	-29.73	-29.58	0.15	-2.73	Note 1
	11be EHT160, SU MIMO, Dual client	MCS0	Radiated 1-18G (dBm)	RSE	207	6.985	Noise floor only	Noise floor only	-	-	-	-

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.