

# **TEST REPORT**

**Report Number:** 15496249-E24V2

**Applicant :** APPLE, INC  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A.

**Model :** A3257 (Parent Model)  
A3525, A3526 (Variant Models)

**Brand :** APPLE

**FCC ID :** BCG-E8950A (Parent Model)  
BCG-E8960A, BCG-E8961A (Variant Models)

**IC :** 579C-E8950A (Parent Model)  
579C-E8960A, 579C-E8961A (Variant Models)

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC 47 CFR PART 2, PART 25  
ISED RSS-GEN ISSUE 5 + A1 + A2, RSS-170 ISSUE 4

**Date Of Issue:**  
2025-08-07

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2025-07-28	Initial Review	--
V2	2025-08-07	Updated Selection 11	Eric Ting

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>5. DECISION RULES AND MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
5.1. <i>METROLOGICAL TRACEABILITY</i> .....	7
5.2. <i>DECISION RULES</i> .....	7
5.3. <i>MEASUREMENT UNCERTAINTY</i> .....	7
5.4. <i>SAMPLE CALCULATION</i> .....	7
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
6.1. <i>DESCRIPTION OF EUT</i> .....	8
6.2. <i>MAXIMUM OUTPUT POWER</i> .....	8
6.3. <i>SOFTWARE AND FIRMWARE</i> .....	9
6.4. <i>MAXIMUM ANTENNA GAIN AND MAXIMUM ALLOWED OUTPUT POWER</i> .....	9
6.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	9
6.6. <i>DESCRIPTION OF TEST SETUP</i> .....	10
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>8. RF OUTPUT POWER VERIFICATION .....</b>	<b>13</b>
<b>9. CONDUCTED TEST RESULTS.....</b>	<b>14</b>
9.1. <i>OCCUPIED BANDWIDTH</i> .....	14
9.2. <i>EMISSIONS MASK WITHIN 250% OF AUTHORIZED BANDWIDTH</i> .....	16
9.2.1. <i>ANT 2</i> .....	17
9.2.2. <i>ANT 3</i> .....	19
9.3. <i>OUT OF BAND EMISSIONS</i> .....	21
9.4. <i>FREQUENCY STABILITY</i> .....	23
<b>10. RADIATED TEST RESULTS .....</b>	<b>24</b>
10.1. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	25
10.1.1. <i>ANT 2 (Above 1GHz)</i> .....	26
10.1.2. <i>ANT 3 (Above 1GHz)</i> .....	28
10.1.3. <i>ANT 2 (Below 1GHz)</i> .....	30
10.1.4. <i>ANT 3 (Below 1GHz)</i> .....	32
10.2. <i>ADDITIONAL UNWANTED EMISSION (1559MHz – 1610MHz)</i> .....	34
10.2.1. <i>ANT 2 (HORIZONTAL)</i> .....	36
10.2.2. <i>ANT 2 (VERTICAL)</i> .....	38
10.2.3. <i>ANT 3 (HORIZONTAL)</i> .....	39

10.2.4. ANT 3 (VERTICAL) .....	41
10.3. CARRIER-OFF STATE EMISSIONS (1559MHz – 1610MHz).....	42
<b>11. SETUP PHOTOS.....</b>	<b>43</b>

# 1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3257 (Parent Model) A3525, A3526 (Variant Models)
Brand	APPLE
FCC ID	BCG-E8950A (Parent Model) BCG-E8960A, BCG-E8961A (Variant Models)
IC	579C-E8950A (Parent Model) 579C-E8960A, 579C-E8961A (Variant Models)
EUT Description	SMARTPHONE
Serial Number	Radiated: HM7J7JQX6J, LFJJGD2VPV. Conducted: HVHHH50002D0000YE7, HVHHH5000130000YE7
Sample Receipt Date	2025-04-17
Date Tested	2025-04-17 to 2025-07-28
Applicable Standards	FCC 47 CFR PART 2, PART 25 ISED RSS-GEN ISSUE 5 + A1 + A2, RSS-170 ISSUE 4
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released By:



Prepared & Reviewed By:



Thu Chan  
Staff Engineer  
UL Verification Services Inc.

Eric Ting  
Senior Test Engineer  
UL Verification Services Inc.

## 2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain and type (see section 6.4)
2. Cable loss (see section 8)

Requirement Description	Requirement Clause Number (FCC)	Requirement Clause Number (ISED)	Result	Remarks
RF Output Power	25.204 (a)	RSS-170 §5.5	Complies	
Occupied Bandwidth	2.1049	RSS-Gen	Complies	
Emissions Mask - within 250% of Authorized Bandwidth	25.202 (f)(1)&(2)	RSS-170 §5.8 (a) (b)	Complies	
Out of Band Emissions	25.202 (f)(3)	RSS-170 §5.8 (c)	Complies	
Frequency Stability	25.202 (d)	RSS-170 §5.3	Complies	
Field Strength of Spurious Radiation	25.202 (f)(3)	RSS-170 §5.8 (c)	Complies	
Additional Unwanted Emission (1559-1610MHz)	25.216 (c)&(g) FCC 03-283	RSS-170 §5.9.1	Complies	
Carrier-Off State Emissions (1559-1610MHz)	25.216 (i) FCC 03-283	RSS-170 §5.10	Complies	

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following.

FCC published lists of [measurement procedures](#) for compliance testing.

ISED published lists of [normative test standards and acceptable alternatives procedures](#).

- ANSI C63.26:2015
- ANSI/TIA-603-E (2016)
- FCC 47 CFR Part 2, Part 25
- [FCC KDB 971168 D01](#) : Power Meas License Digital Systems (ISED acceptable alternative procedure)
- [FCC KDB 971168 D02](#) : Misc Rev Approv License Devices
- [FCC KDB 412172 D01](#) : Determining ERP and EIRP
- ISED RSS-GEN ISSUE 5 + A1 + A2, RSS-170 ISSUE 4

## 4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
<input type="checkbox"/>	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
<input type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
<input checked="" type="checkbox"/>	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

## 5. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U <sub>Lab</sub>
Conducted Antenna Port Emission Measurement	1.940 dB
Power Spectral Density	2.466 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 dB Ave. 1.300 dB Peak
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.4. SAMPLE CALCULATION

#### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dB<sub>uV/m</sub>) = Measured Voltage (dB<sub>uV</sub>) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dB}_{uV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dB}_{uV/m}$$

## 6. EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5GNR1, 5GNR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

### 6.2. MAXIMUM OUTPUT POWER

#### LIMITS

FCC: §25.204

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+ 40 dBW in any 4 kHz band for  $\theta \leq 0^\circ$

+ 40 + 30 dBW in any 4 kHz band for  $0^\circ < \theta \leq 5^\circ$

where  $\theta$  is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

ISED: RSS-170§5.5: Transmitter output power for MESs (Mobile Earth Stations)

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

#### EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015

KDB 971168 D01 Section 5.6

$$\text{EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: EIRP = effective isotropic radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and EIRP output powers as follows:

Frequency (MHz)	Conducted Average Power (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
				(dBm)	(W)		
1610.17	27.977	-2.4	10000	25.58	0.361	201.75	202KG1D
1618.40	28.000		10000	25.60	0.363	200.37	200KG1D
1626.03	27.995		10000	25.60	0.363	201.80	202KG1D

### 6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.08.00.

### 6.4. MAXIMUM ANTENNA GAIN AND MAXIMUM ALLOWED OUTPUT POWER

Frequency Range (MHz)	ANT 2 Gain (dBi)	ANT 3 Gain (dBi)
1610.0 - 1626.5	-2.4	-4.0

### 6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X/Y/Z on all available antennas to determine the worst-case orientation. The full tests of the EUT have made upon the orientations shown in the table below.

ANT3	ANT2
X	X

The emissions mask tests were performed based on declared authorized bandwidths of 200kHz, 230kHz and 280kHz.

Radiated spurious emissions below 1GHz were performed with the highest output power on both ANT 3 and ANT 2 as worst-case scenario.

Radiated spurious emissions were investigated from 9kHz to 30MHz and 30MHz-1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 30MHz and 30MHz-1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GHz WLAN, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


## 6.6. DESCRIPTION OF TEST SETUP



SUPPORT TEST EQUIPMENT				
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC
Laptop	Apple	MacBook Pro	DLP9QC65WT	DoC
Laptop AC/DC Adapter	Apple	61W Charger	C06939403RAJFYFBU	DoC
EUT AC/DC Cable	Apple	A246F	FTLHDB001KW0001061	DoC
EUT AC/DC Adapter	Apple	B820	C4H9516000GPF4F4H	DoC

I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# Of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	Type-C	Shielded	2.0	N/A
3	RF In/Out	1	SMA	Shielded	1.0	N/A
4	RF In/Out	1	SMA	Shielded	0.5	N/A
5	RF In/Out	1	SMA Adapter	N/A	N/A	N/A

I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# Of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Type-C	Un-shielded	1.0	N/A

### CONDUCTED SETUP ANT 3

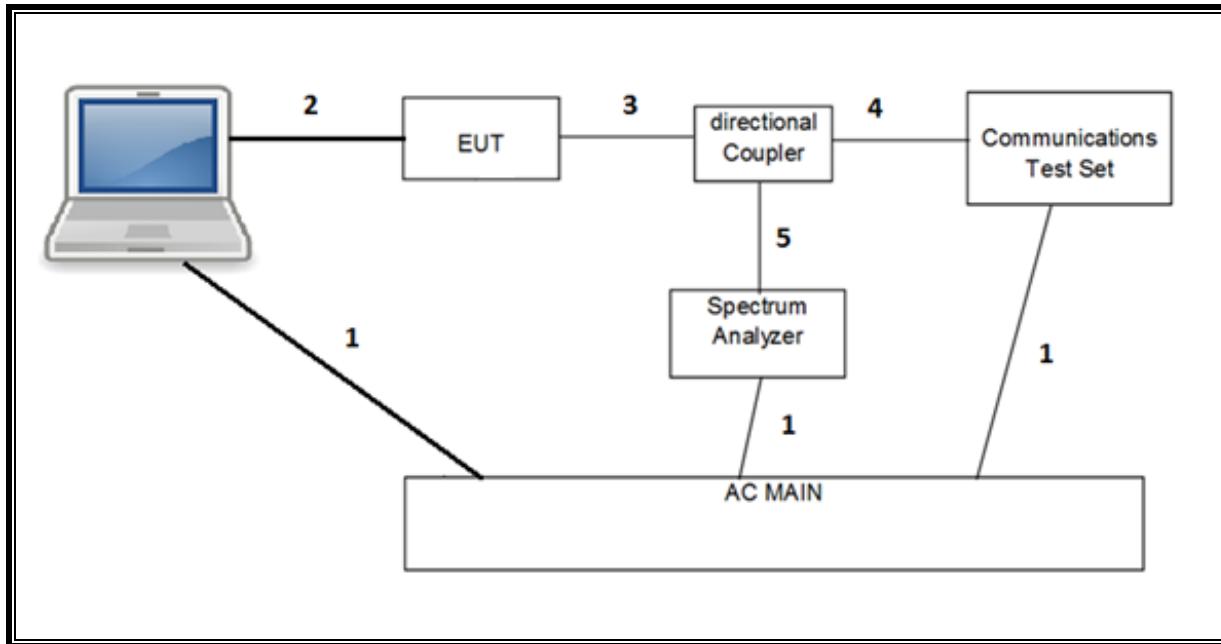

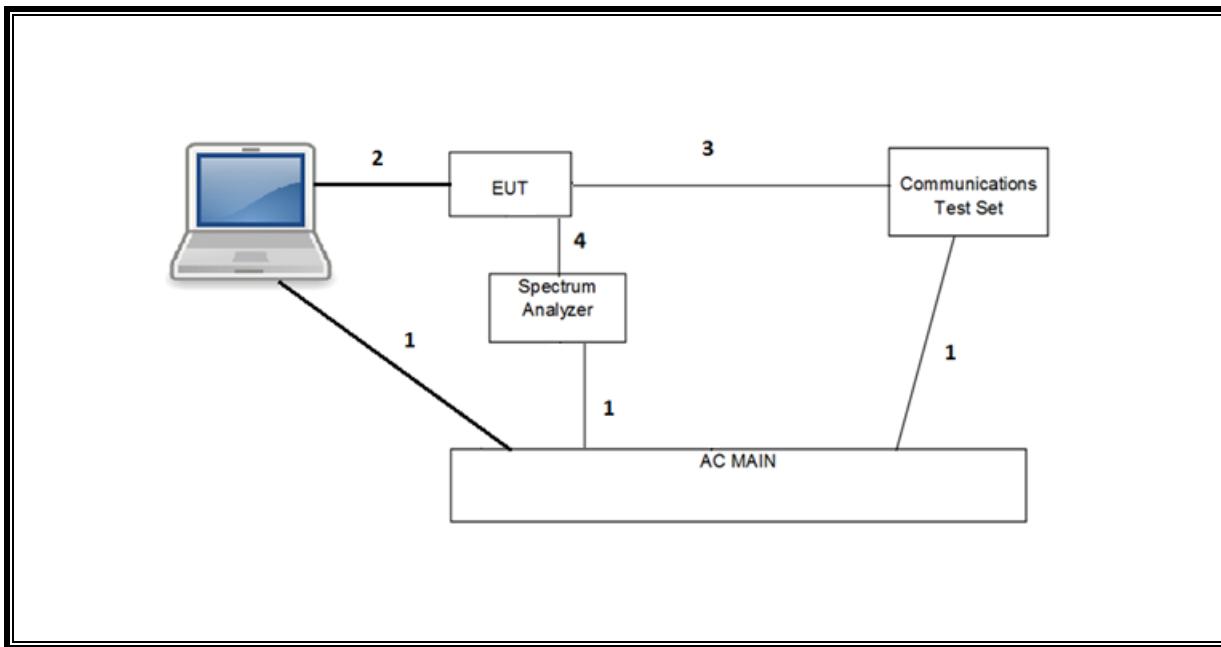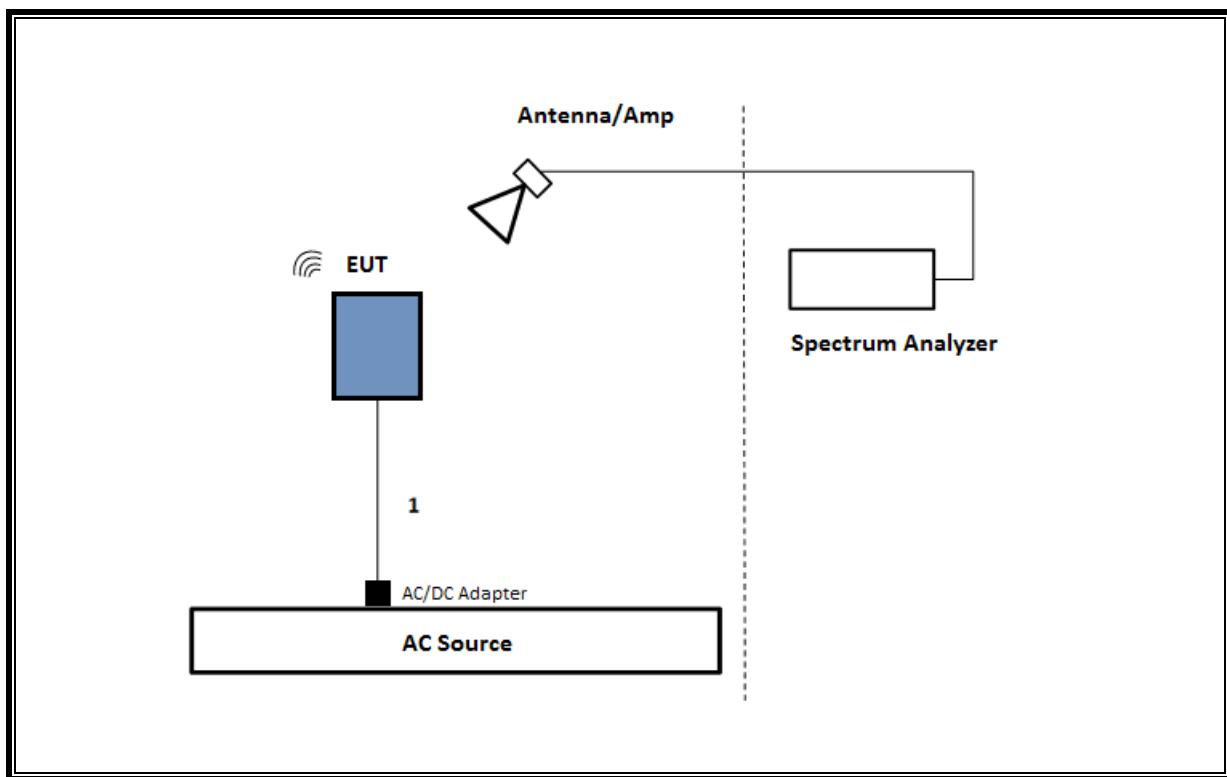**CONDUCTED SETUP ANT 2****RADIATED SETUP**

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223462	02-28-2026
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200784	03-31-2027
RF Filter Box, 1-18GHz	UL-FR1	N/A	168534	02-28-2026
* Antenna, Broadband Hybrid, 30MHz to 2GHz	Sunol Sciences Corp.	JB3	85150	12-30-2025
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	29637	09-30-2026
Antenna, Passive Loop 100kHz to 30MHz	ELECTRO-METRICS	EM-6872	29640	09-30-2026
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310N	170649	08-31-2025
Directional Coupler	KRYTAR	152610	254457	10-31-2025
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	262734	04-30-2026
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	A0U396816	07-12-2025
UL AUTOMATION SOFTWARE				
Conducted Software	UL	Antenna Port	Ver.2022.8.16& 2021.5.13	
Conducted Software	UL	Station Tool	Ver. 5.0 & 5.3	

### NOTES:

1. \* Testing is completed before equipment expiration date.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 8. RF OUTPUT POWER VERIFICATION

### LIMITS

FCC: §25.204

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+ 40 dBW in any 4 kHz band for  $\theta \leq 0^\circ$

+ 40 + 30 dBW in any 4 kHz band for  $0^\circ < \theta \leq 5^\circ$

where  $\theta$  is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

ISED: RSS-170§5.5: Transmitter output power for MESs (Mobile Earth Stations)

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

### TEST PROCEDURE

The transmitter output is connected to a wideband power meter/sensor which is greater than the occupied bandwidth as worst-case scenario, also the total power readings still comply with the required limit.

The cable assembly insertion loss of 12.79 dB (ANT 2) / 12.13 dB (ANT 3) (including 10.70 dB coupler and 2.09 dB cable (ANT 2) / 10 dB pad and 2.13 dB cable (ANT 3)) was entered as an offset in the power meter to allow for a gated average reading of power.

### RESULTS

Test Engineer ID:	26118	Test Date:	2025-04-17
-------------------	-------	------------	------------

Test Frequency (MHz)	Conducted Average Power (dBm)		Antenna Gain (dBi)		EIRP Average Power (dBm)	
	ANT 2	ANT 3	ANT 2	ANT 3	ANT 2	ANT 3
1610.17	27.977	27.941	-2.4	-4.0	25.58	23.94
1618.40	28.000	28.000			25.60	24.00
1626.03	27.995	27.963			25.60	23.96

## 9. CONDUCTED TEST RESULTS

### 9.1. OCCUPIED BANDWIDTH

#### RULE PART(S)

FCC: §2.1049

ISED: RSS-GEN

#### LIMITS

For reporting purposes only.


#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW. The 99% bandwidths were measured and recorded.


#### RESULTS

Test Engineer ID:	26118	Test Date:	2025-04-17
-------------------	-------	------------	------------


Test Frequency (MHz)	99% Bandwidth (kHz) ANT 2	99% Bandwidth (kHz) ANT 3
1610.17	201.75	200.59
1618.40	200.37	200.33
1626.03	201.80	200.13

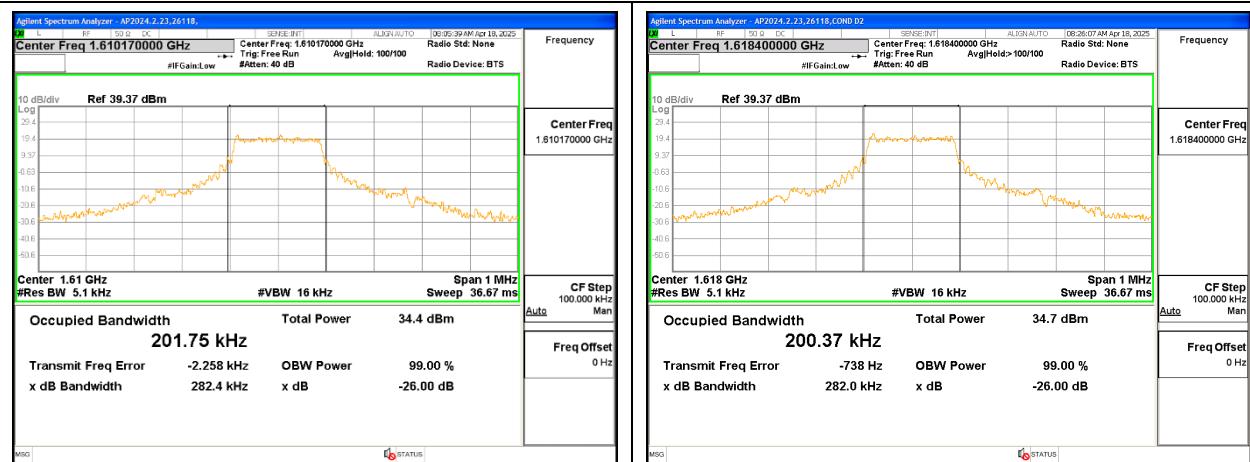

Occupied Bandwidth Low Channel Ant2

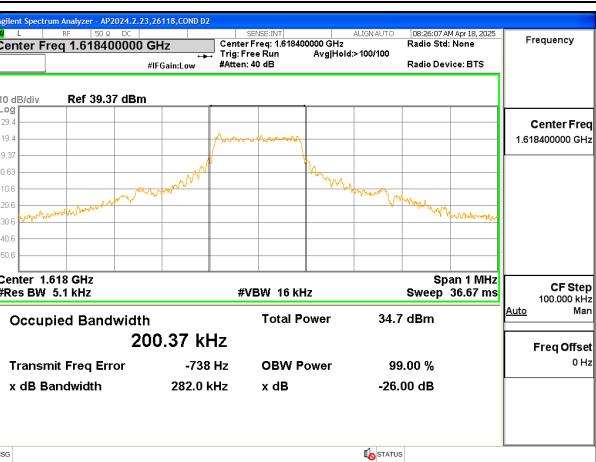


Occupied Bandwidth Mid Channel Ant2

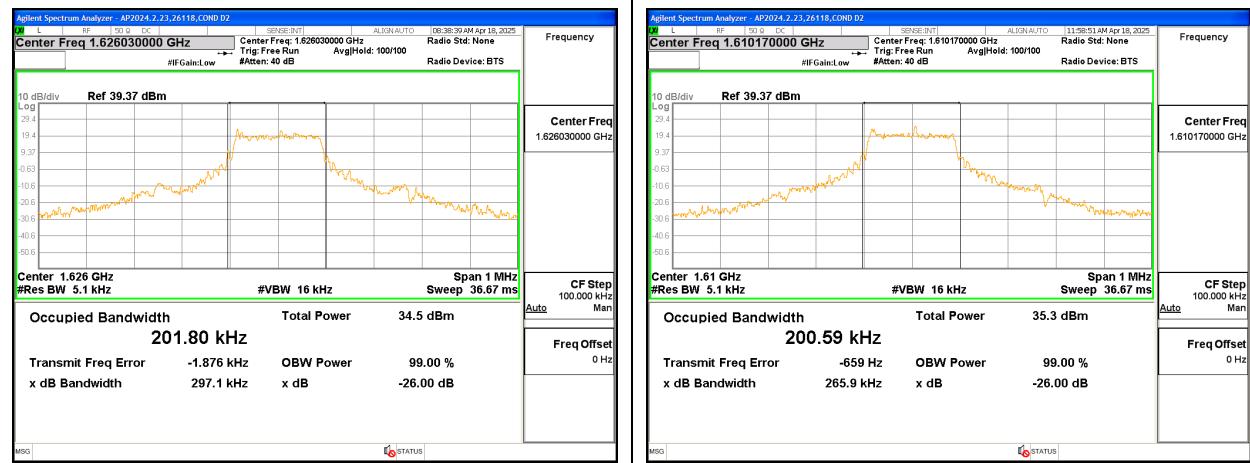

Occupied Bandwidth High Channel Ant3

Occupied Bandwidth Low Channel Ant3

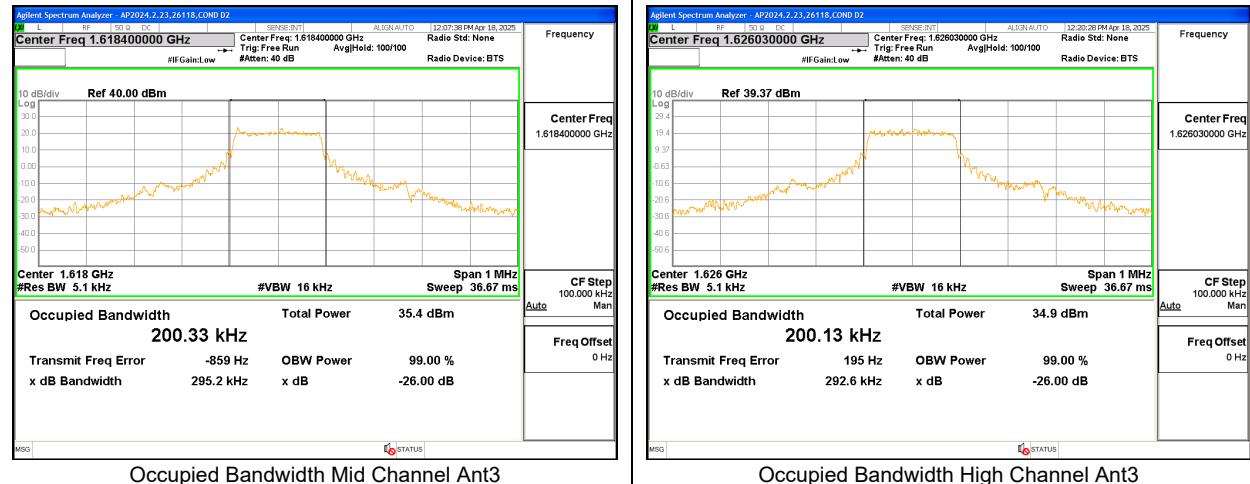

Occupied Bandwidth Mid Channel Ant3

Occupied Bandwidth High Channel Ant3

## 9.2. EMISSIONS MASK WITHIN 250% OF AUTHORIZED BANDWIDTH

### LIMITS

#### FCC §25.202

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;

(2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: 35 dB;

#### ISED RSS-170§ 5.8: Unwanted emission limits for MESs in all frequency bands

The average power of unwanted emissions shall be attenuated below the average output power, P (dBW), of the transmitter, as specified below:

- a. 25 dB in any 4 kHz, the frequency of which is offset from the channel centre frequency by more than 50%, up to and including 100% of the occupied bandwidth or necessary bandwidth, whichever is greater
- b. 35 dB in any 4 kHz, the frequency of which is offset from the channel centre frequency by more than 100%, up to and including 250% of the occupied bandwidth or necessary bandwidth, whichever is greater

### TEST PROCEDURE


The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The channel edge emissions were measured on the low, mid and high channels. The limits within 250% of the authorized bandwidth are relative to the total in-band (channel) power. The measurement bandwidth (RBW) is set to  $\geq 4\text{kHz}$  and VBW set to at least 3 times the RBW. To measure the average value of the emissions the detector is set to rms while observing the minimum required number of points as detailed in ANSI C63.26 for average rms measurements. The sweep time is set to 2ms multiplied by the number of points to obtain the average over 2ms. Multiple sweeps with max hold enabled are made to capture the maximum average value.


### RESULTS

The tests were performed based on declared authorized bandwidths of 200kHz, 230kHz and 280kHz.


Test Engineer ID:	26118	Test Date:	2025-04-17
-------------------	-------	------------	------------


## 9.2.1. ANT 2

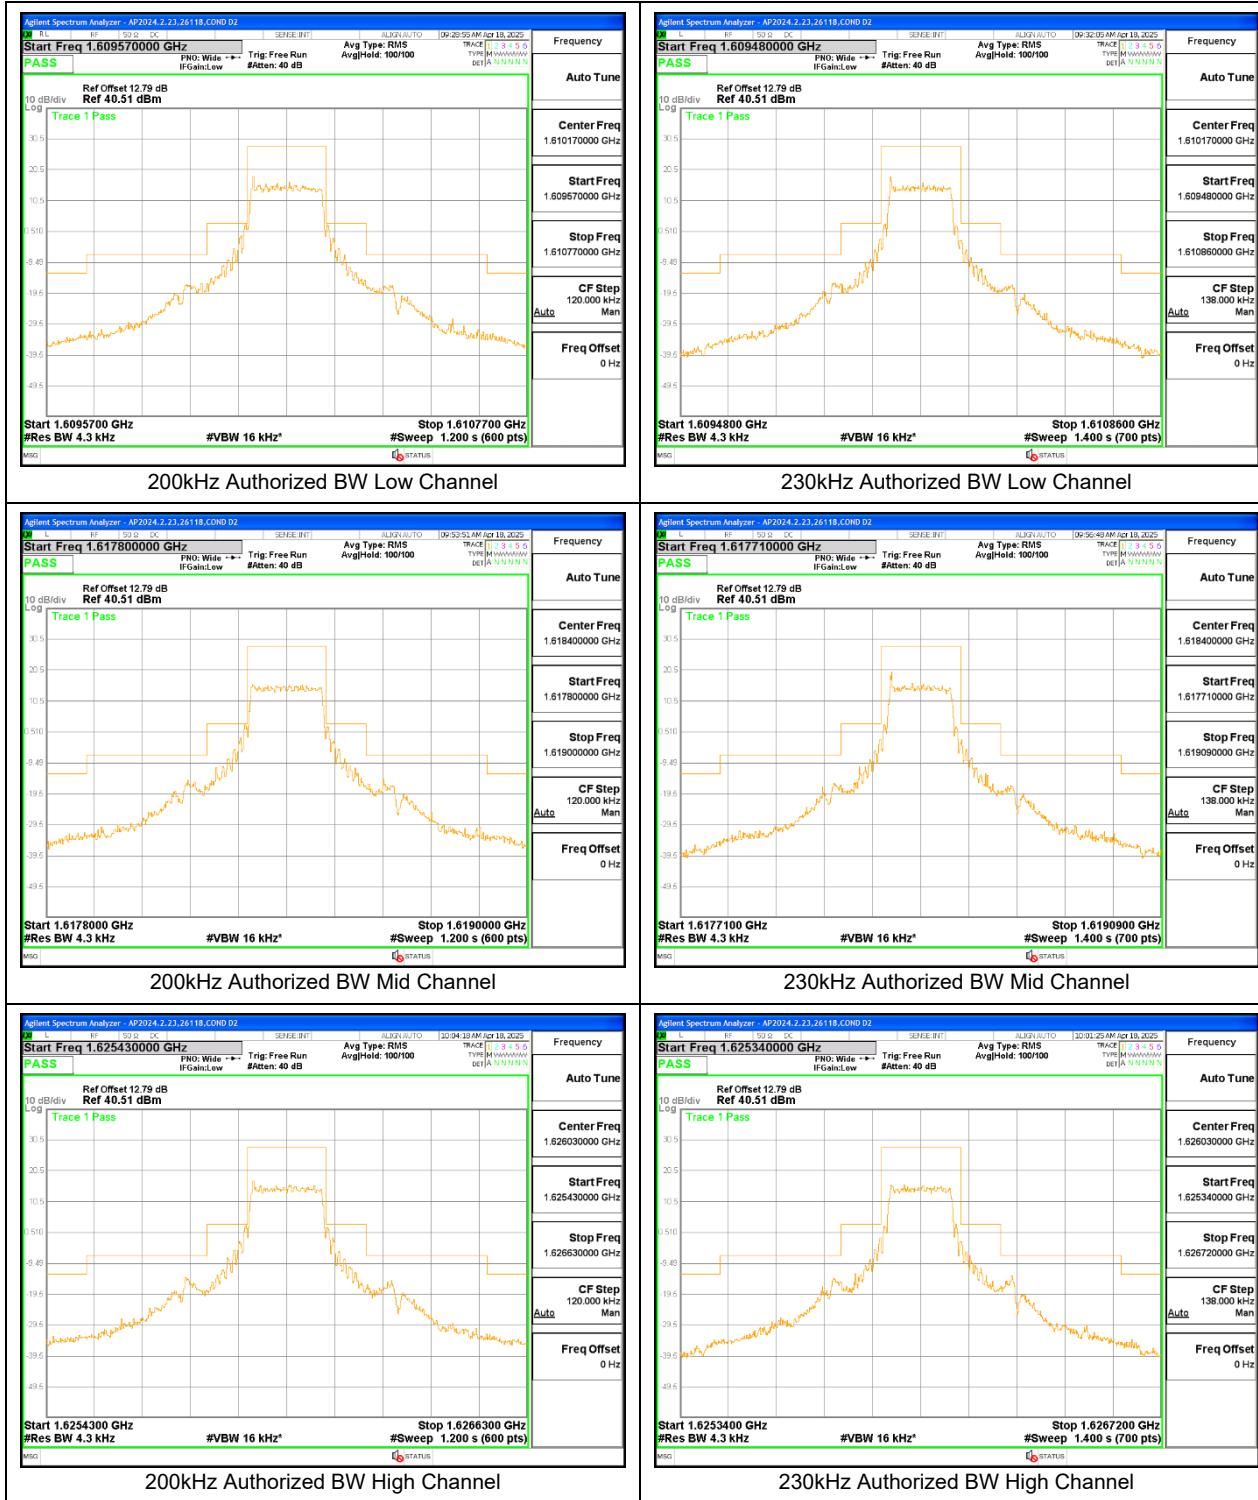

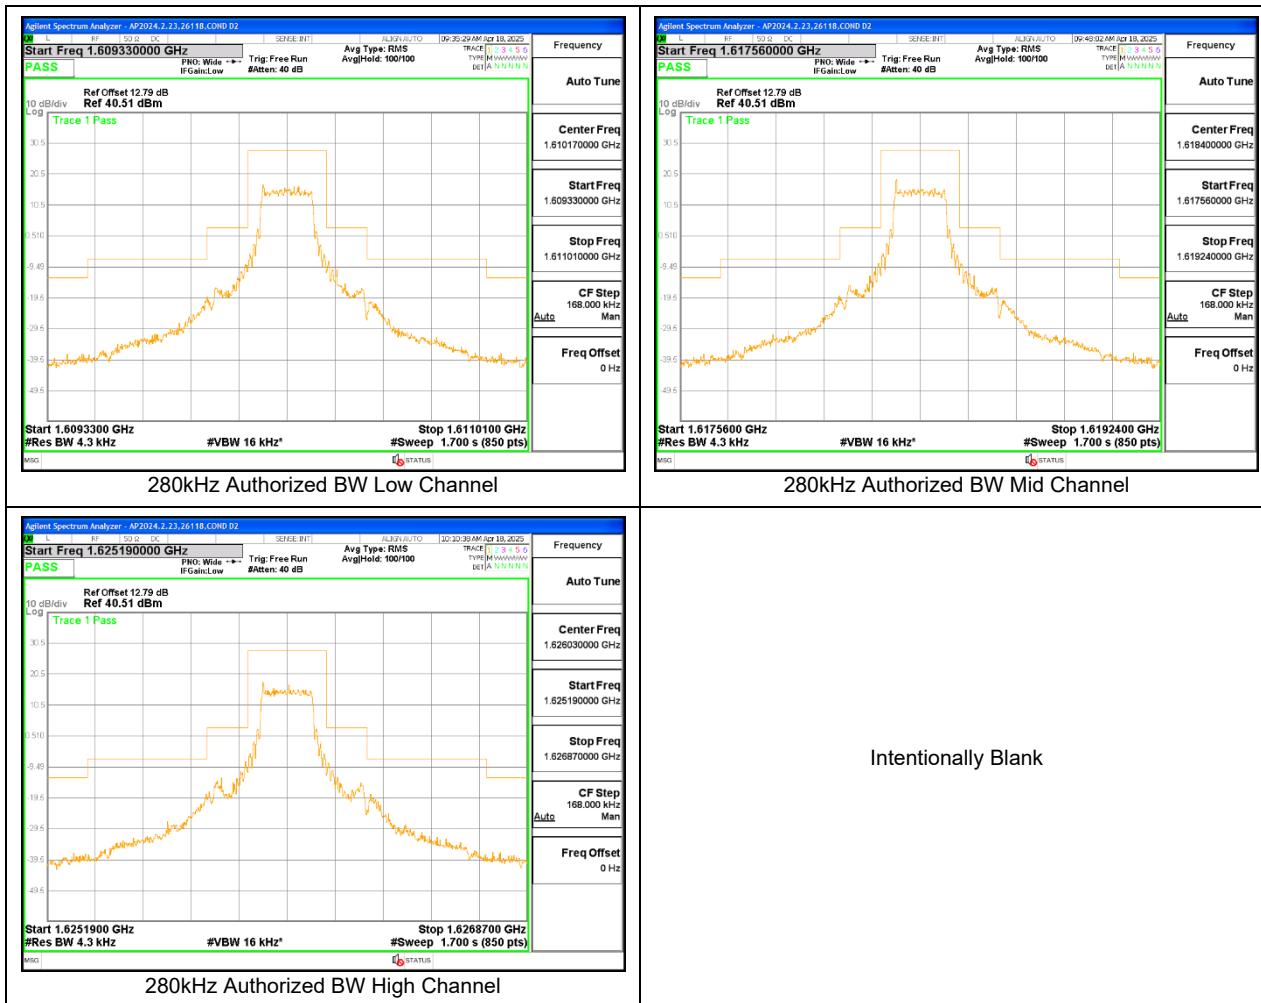

## 9.2.2. ANT 3

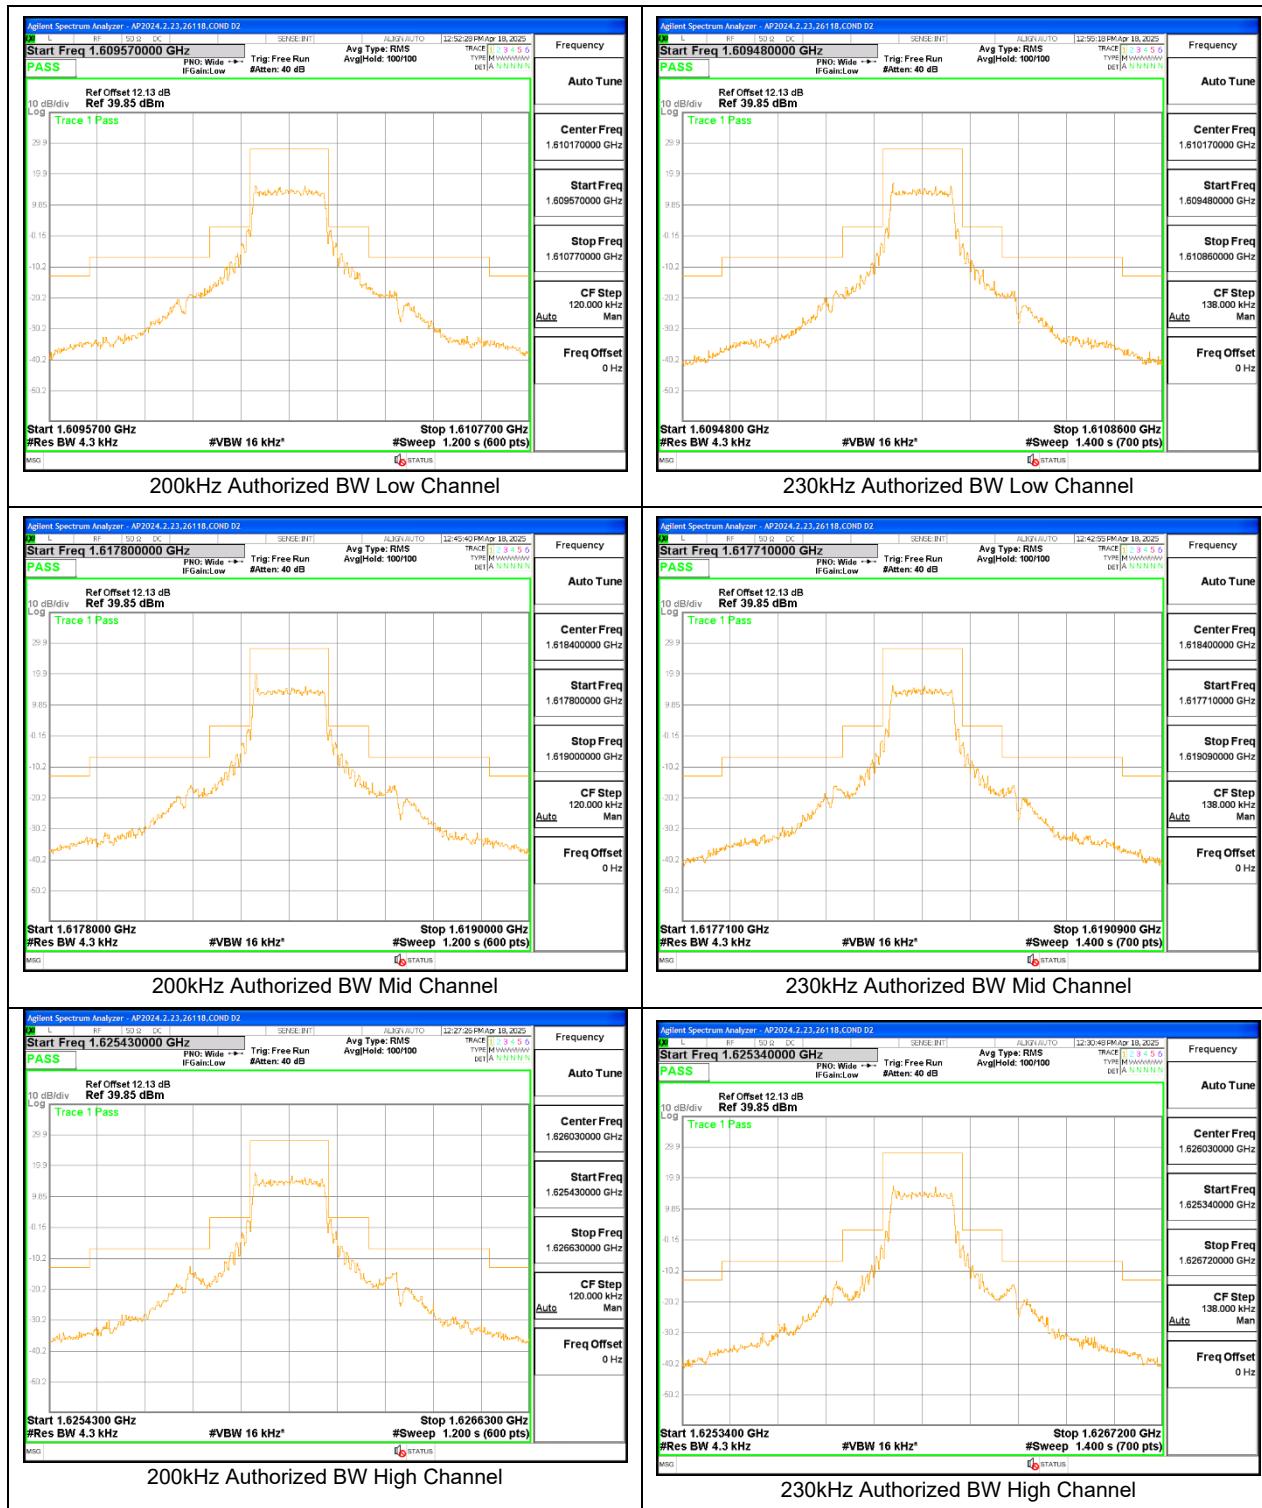

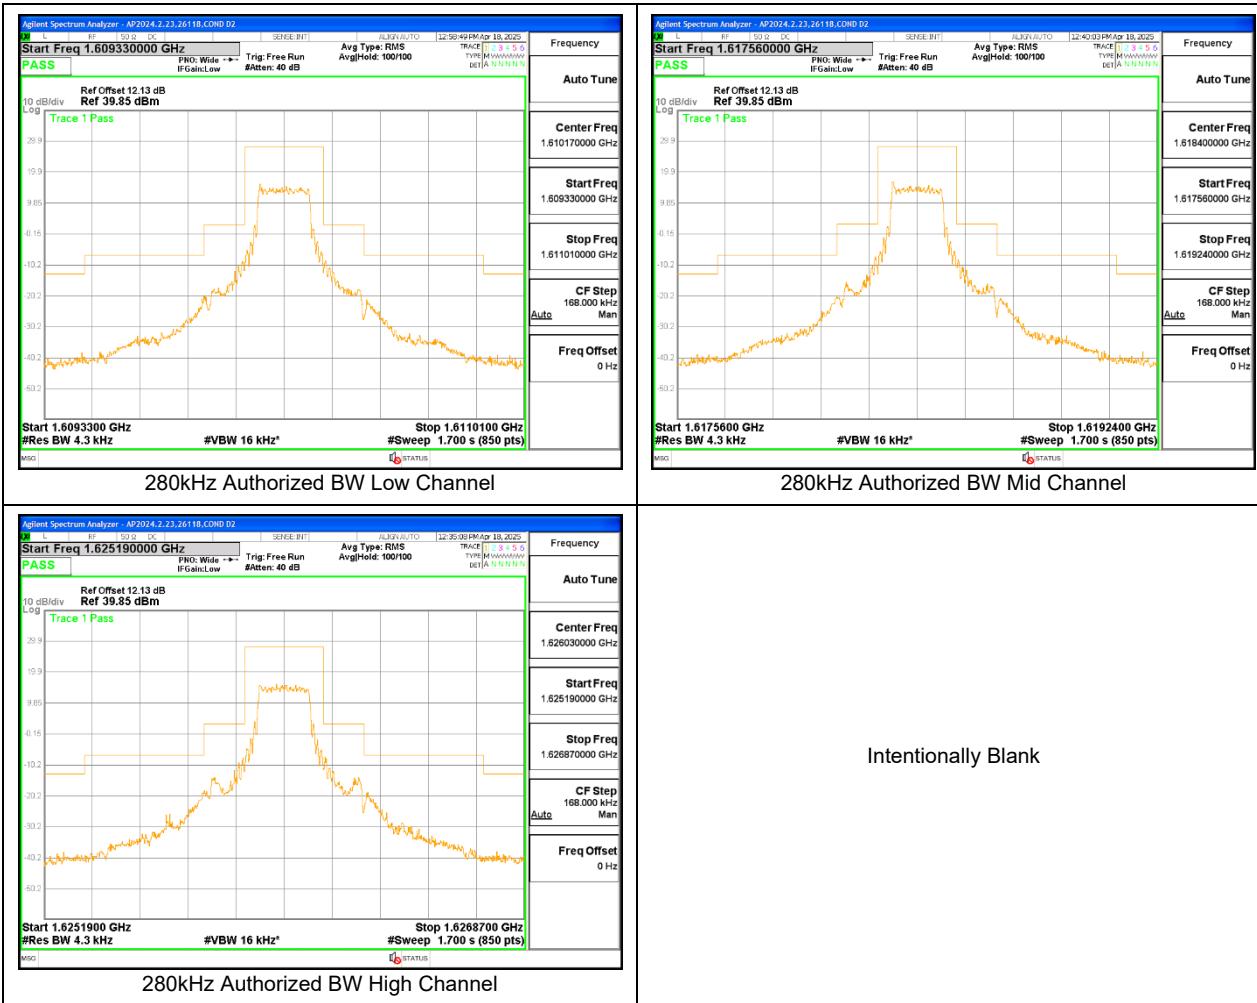

### 9.3. OUT OF BAND EMISSIONS

#### LIMITS

FCC §25.202 and

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts.

ISED RSS-170§5.8: Unwanted emission limits for MESs in all frequency bands

- c.  $43 + 10 \log p$  (watts) in any 4 kHz, the frequency of which is offset from the channel centre frequency by more than 250% of the occupied bandwidth or necessary bandwidth, whichever is greater

#### TEST PROCEDURE


KDB 971168 D01/D02

For each out of band emissions measurement:


- Set display line at -13 dBm (the limit of  $43 + 10\log(P)$ )
- Set RBW  $\geq 4\text{kHz}$  and VBW  $\geq 3 \times \text{RBW}$  with peak detector for all measurements. The limit is an average limit so any emissions that exceed the limit using the peak detector are measured using rms detection with an averaging time of 2ms.

#### RESULTS

Test Engineer ID:	26118	Test Date:	2025-04-17
-------------------	-------	------------	------------

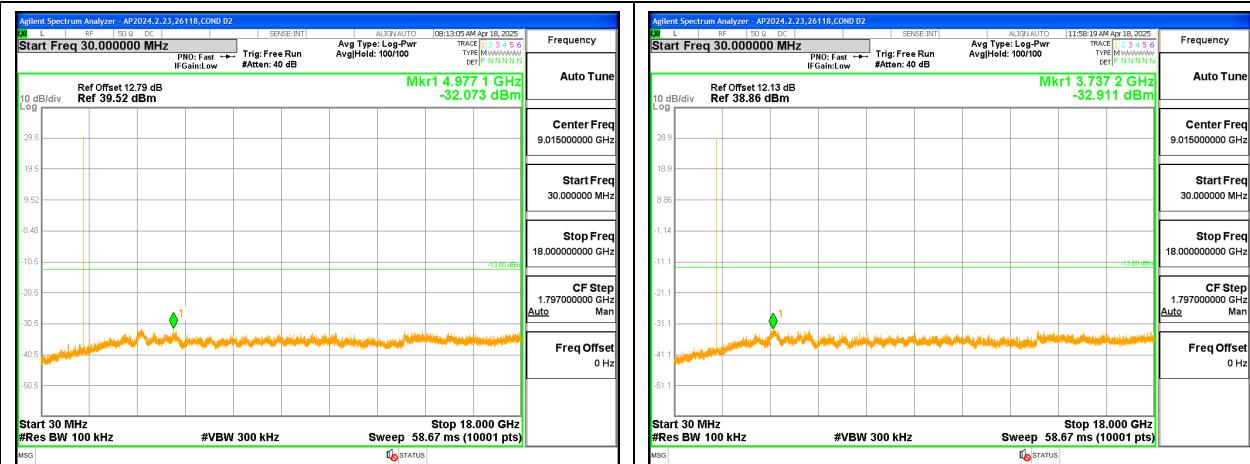


Low Channel 30MHz to 18GHz Ant2

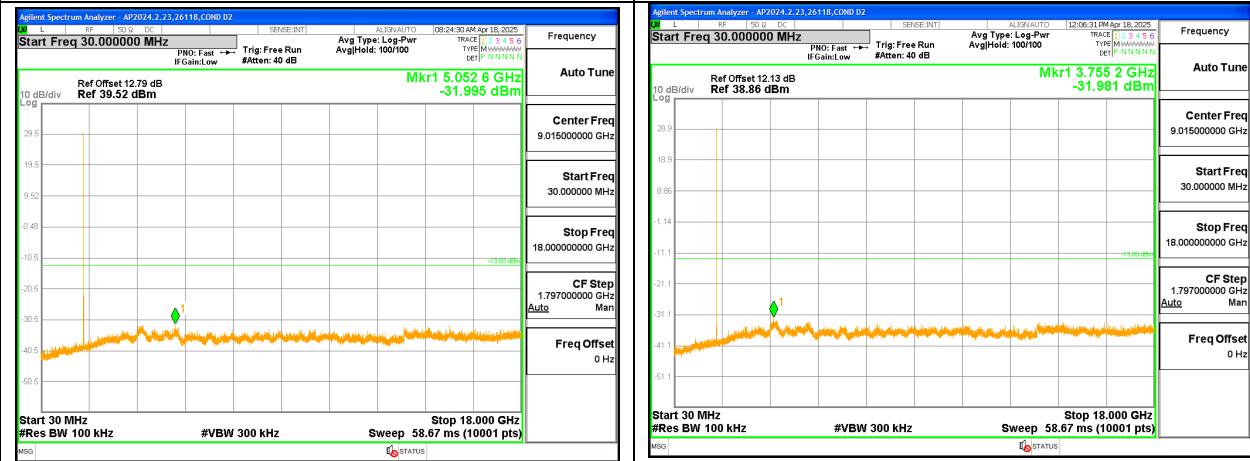


Mid Channel 30MHz to 18GHz Ant2


Low Channel 30MHz to 18GHz Ant3

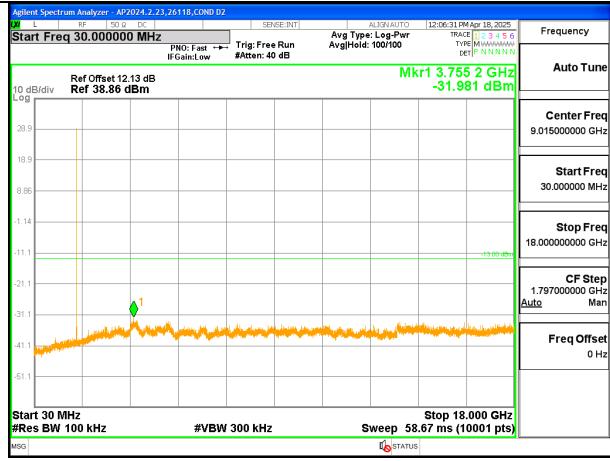

Mid Channel 30MHz to 18GHz Ant3

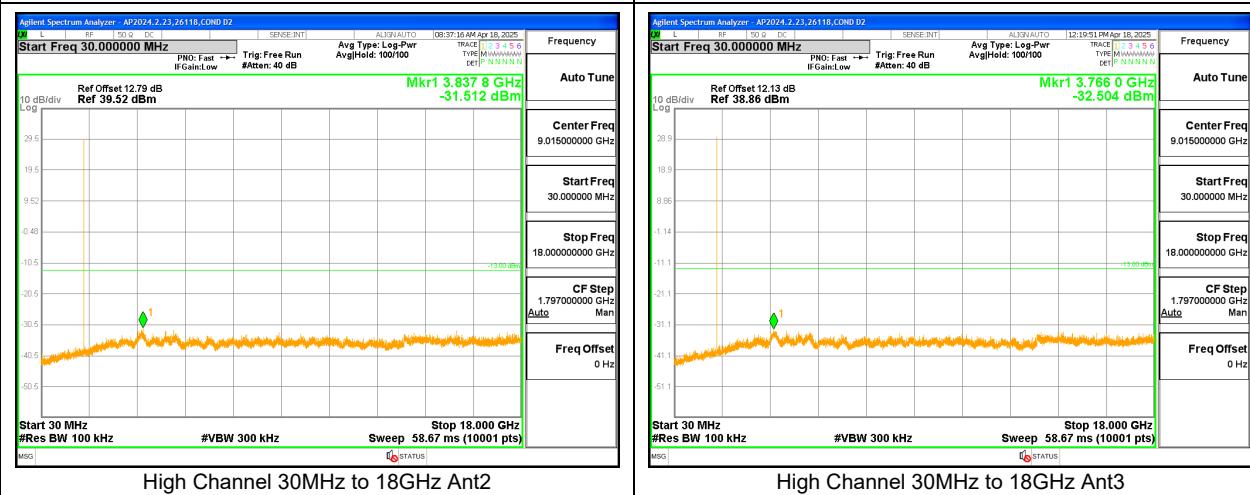

High Channel 30MHz to 18GHz Ant2

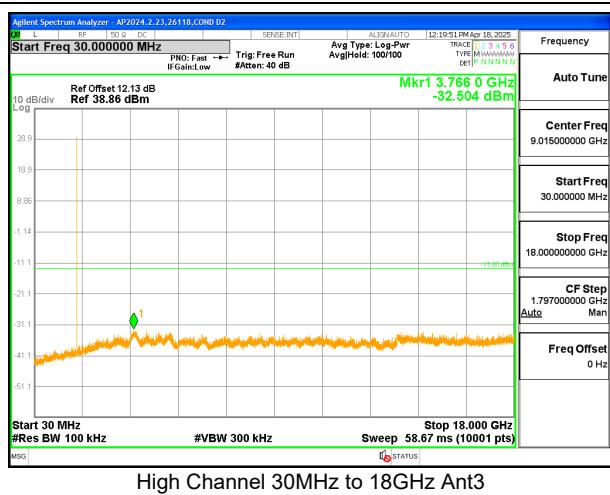

High Channel 30MHz to 18GHz Ant3

## 9.4. FREQUENCY STABILITY

### LIMITS

FCC §25.202

(d) Frequency tolerance, Earth stations. The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent of the reference frequency.

ISED RSS-170: 5.3

For MES equipment, the carrier frequency shall not drift from the reference frequency by more than  $\pm 10$  ppm.

### TEST PROCEDURE

Use spectrum with Frequency Error measurement capability.

- Temp. =  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.

End Voltage, 2.95VDC.

#### **Frequency Stability vs Temperature:**

The EUT is place inside a temperature chamber. The temperature is set to  $20^{\circ}\text{C}$  and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until  $+50^{\circ}\text{C}$  is reached.

#### **Frequency Stability vs Voltage:**

The peak frequency error is recorded (worst-case).

### RESULTS

Test Engineer ID:	32546	Test Date:	2025-05-15
-------------------	-------	------------	------------

Frequency Reference (MHz)		1610.17022		Frequency Reading (MHz)	Delta (Hz)	Frequency Stability (ppm)
Condition	Temperature	F low @ -10dB BW (MHz)	F high @ -10dB BW (MHz)			
Normal (20 C)	Normal	1610.078938	1610.2615	1610.17022		
Extreme (50C)		1610.079126	1610.261625	1610.17038	156.5	0.10
Extreme (40C)		1610.078813	1610.260875	1610.16984	-374.7	-0.23
Extreme (30C)		1610.079188	1610.261	1610.17009	-124.7	-0.08
Extreme (10C)		1610.078938	1610.26125	1610.17009	-124.7	-0.08
Extreme (0C)		1610.078626	1610.261938	1610.17028	62.7	0.04
Extreme (-10C)		1610.079563	1610.261125	1610.17034	125.3	0.08
Extreme (-20C)		1610.078798	1610.260324	1610.16956	-657.7	-0.41
Extreme (-30C)		1610.077597	1610.261827	1610.16971	-506.8	-0.31
20C		15%	1610.079563	1610.261688	406.5	0.25
		-15%	1610.079001	1610.261188	-124.7	-0.08
		End Point	1610.079063	1610.261563	94.0	0.06

## 10. RADIATED TEST RESULTS

### Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, the radiated emissions is measured directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement.

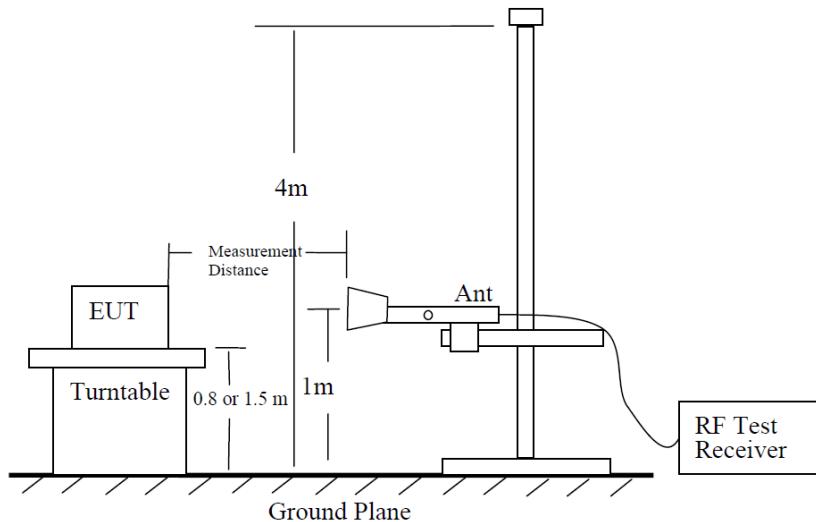


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

### Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a)  $E (\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level } (\text{dB}\mu\text{V}) + \text{Cable Loss } (\text{dB}) + \text{Antenna Factor } (\text{dB}/\text{m})$ .
- b)  $E (\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level } (\text{dBm}) + 107 + \text{Cable Loss } (\text{dB}) + \text{Antenna Factor } (\text{dB}/\text{m})$ .
- c)  $E (\text{dB}\mu\text{V}/\text{m}) = \text{EIRP } (\text{dBm}) - 20\log(D) + 104.8$ ; where D is the measurement distance (in the far field region) in m.
- d)  $\text{EIRP } (\text{dBm}) = E (\text{dB}\mu\text{V}/\text{m}) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.

So, from d)

The measuring distance is usually at 3m, then  $20\log(3) = 9.5424$

Then,  $\text{EIRP } (\text{dBm}) = E (\text{dB}\mu\text{V}/\text{m}) + 9.5424 - 104.8 = E (\text{dB}\mu\text{V}/\text{m}) - 95.2576$

## 10.1. FIELD STRENGTH OF SPURIOUS RADIATION

### LIMITS

#### FCC §25.202

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts;

ISED RSS-170§5.8: Unwanted emission limits for MESs in all frequency bands

- c.  $43 + 10 \log p$  (watts) in any 4 kHz, the frequency of which is offset from the channel centre frequency by more than 250% of the occupied bandwidth or necessary bandwidth, whichever is greater

### TEST PROCEDURE

KDB 971168 D01/D02

For each out of band emissions measurement:

- Set display line at -13 dBm (the limit of  $43 + 10\log(P)$ )
- Set RBW  $\geq 4\text{kHz}$  and VBW  $\geq 3 \times \text{RBW}$  with peak detector for all measurements. The limit is an average limit so any emissions that exceed the limit using the peak detector are measured using rms detection with an averaging time of 2ms.

### RESULTS

Plots are provided for the center channel. Tabular data for all channels is presented.

**10.1.1. ANT 2 (Above 1GHz)**

Date:	2025-07-23
Test Engineer:	32545
Configuration:	EUT + Charger
Mode:	TX
Chamber #:	01-RDE-A

**LOW CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.219891	30.25	Pk	32.8	-95.2	-24.6	-56.75	-13	-43.75	0-360	151	H
2	3.220368	30.56	Pk	32.8	-95.2	-24.6	-56.44	-13	-43.44	0-360	151	V
3	4.836869	27.43	Pk	34.1	-95.2	-21.99	-55.66	-13	-42.66	0-360	151	H
4	4.842588	27.49	Pk	34.1	-95.2	-22	-55.61	-13	-42.61	0-360	151	V
5	6.353293	26.59	Pk	35.7	-95.2	-19.8	-52.71	-13	-39.71	0-360	151	H
6	6.328512	27.55	Pk	35.7	-95.2	-20.2	-52.15	-13	-39.15	0-360	151	V

Pk - Peak detector

\* - Noise floor

**MID CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.222418	27.83	Pk	32.8	-95.2	-24.52	-59.09	-13	-46.09	0-360	151	H
2	3.20893	28.17	Pk	32.8	-95.2	-24.8	-59.03	-13	-46.03	0-360	151	V
3	4.830198	26.26	Pk	34.1	-95.2	-21.82	-56.66	-13	-43.66	0-360	151	H
4	4.830198	30.15	Pk	34.1	-95.2	-21.82	-52.77	-13	-39.77	0-360	151	V
5	6.413816	26.84	Pk	35.7	-95.2	-19.2	-51.86	-13	-38.86	0-360	151	H
6	6.422394	27.77	Pk	35.7	-95.2	-19.14	-50.87	-13	-37.87	0-360	151	V

Pk - Peak detector


\* - Noise floor

**HIGH CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.230376	29.62	Pk	32.8	-95.2	-24.5	-57.28	-13	-44.28	0-360	151	H
2	3.230376	29.13	Pk	32.8	-95.2	-24.5	-57.77	-13	-44.77	0-360	151	V
3	4.837346	27.2	Pk	34.1	-95.2	-22	-55.90	-13	-42.90	0-360	151	H
4	4.845924	29.74	Pk	34.1	-95.2	-22.1	-53.46	-13	-40.46	0-360	151	V
5	6.501981	25.87	Pk	35.7	-95.2	-19.2	-52.83	-13	-39.83	0-360	151	H
6	6.502934	27.03	Pk	35.7	-95.2	-19.2	-51.67	-13	-38.67	0-360	151	V


Pk - Peak detector

\* - Noise floor

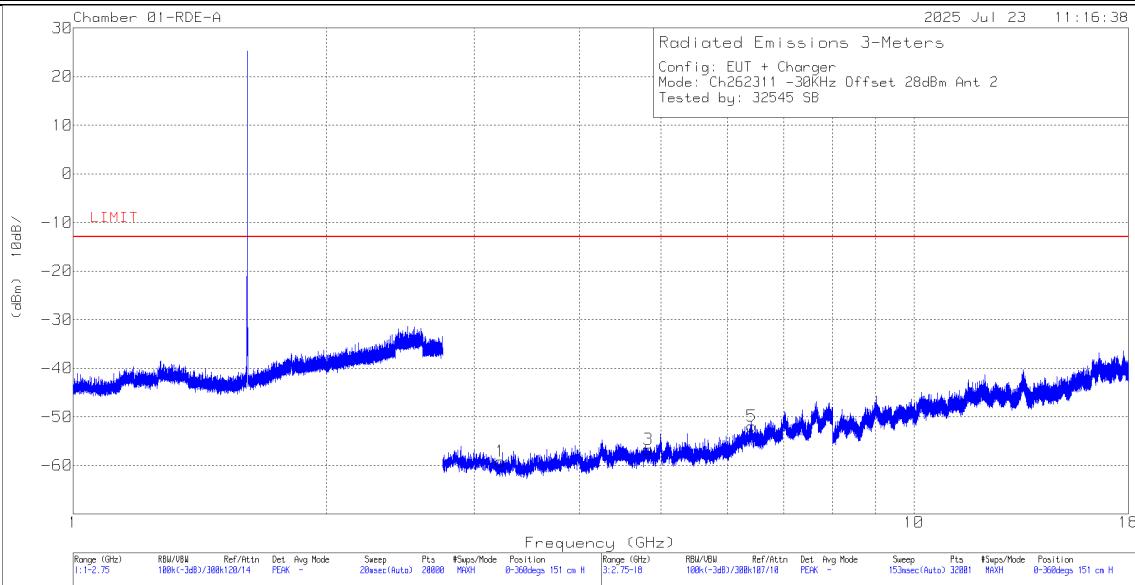

EIRP FCC EN License 1-18GHz\_100k-300k.tst jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL HORIZONTAL

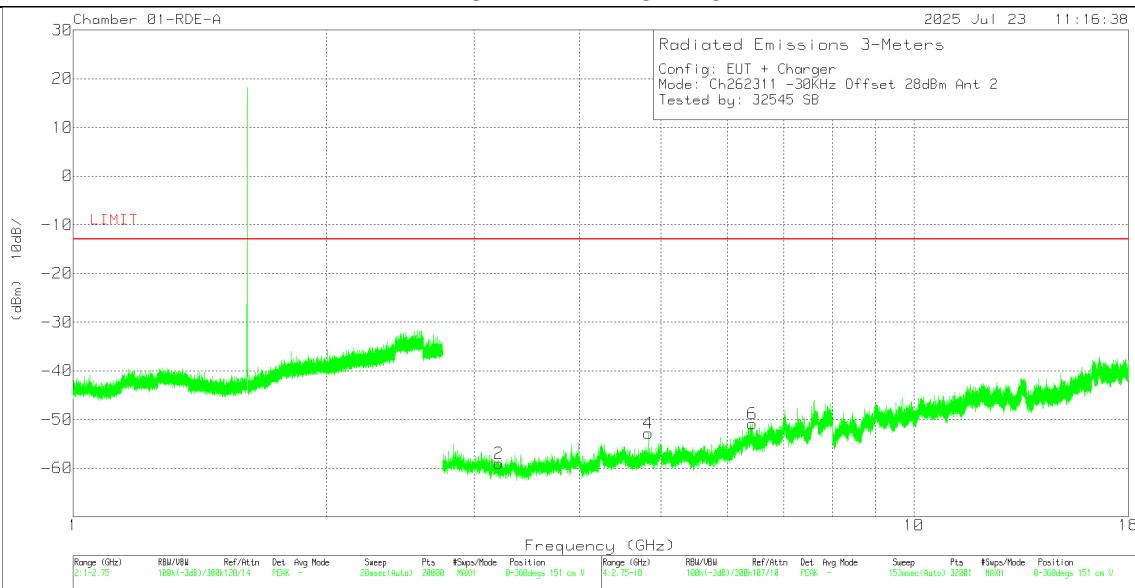

EIRP FCC EN License 1-18GHz\_100k-300k.tst jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL VERTICAL

**10.1.2. ANT 3 (Above 1GHz)**

Date:	2025-07-23
Test Engineer:	32545
Configuration:	EUT + Charger
Mode:	TX
Chamber #:	01-RDE-A

**LOW CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.230852	29.31	Pk	32.8	-95.2	-24.5	-57.59	-13	-44.59	0-360	151	H
2	3.226086	27.46	Pk	32.8	-95.2	-24.6	-59.54	-13	-46.54	0-360	151	V
3	4.838776	27.73	Pk	34.1	-95.2	-22	-55.37	-13	-42.37	0-360	151	H
4	4.845924	29.99	Pk	34.1	-95.2	-22.1	-53.21	-13	-40.21	0-360	151	V
5	6.455754	25.72	Pk	35.7	-95.2	-18.98	-52.76	-13	-39.76	0-360	151	H
6	6.449559	25.71	Pk	35.7	-95.2	-19	-52.79	-13	-39.79	0-360	151	V

Pk - Peak detector

\* - Noise floor

**MID CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.246102	27.67	Pk	32.8	-95.2	-24.3	-59.03	-13	-46.03	0-360	151	H
2	3.248008	28.47	Pk	32.8	-95.2	-24.3	-58.23	-13	-45.23	0-360	151	V
3	4.869276	26.85	Pk	34.1	-95.2	-22.6	-56.85	-13	-43.85	0-360	151	H
4	4.862604	27.9	Pk	34.1	-95.2	-22.54	-55.74	-13	-42.74	0-360	151	V
5	6.517707	25.8	Pk	35.7	-95.2	-19.27	-52.97	-13	-39.97	0-360	151	H
6	6.527238	26.01	Pk	35.7	-95.2	-19.5	-52.99	-13	-39.99	0-360	151	V

Pk - Peak detector


\* - Noise floor

**HIGH CHANNEL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200784 ACF (dB/m)	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.248485	28.65	Pk	32.8	-95.2	-24.3	-58.05	-13	-45.05	0-360	151	H
2	3.250868	28.91	Pk	32.8	-95.2	-24.21	-57.70	-13	-44.70	0-360	151	V
3	4.861651	27.77	Pk	34.1	-95.2	-22.57	-55.90	-13	-42.90	0-360	151	H
4	4.877854	30.94	Pk	34.1	-95.2	-22.7	-52.86	-13	-39.86	0-360	151	V
5	6.510559	26.38	Pk	35.7	-95.2	-19.26	-52.38	-13	-39.38	0-360	151	H
6	6.513895	25.59	Pk	35.7	-95.2	-19.21	-53.12	-13	-40.12	0-360	151	V

Pk - Peak detector

\* - Noise floor

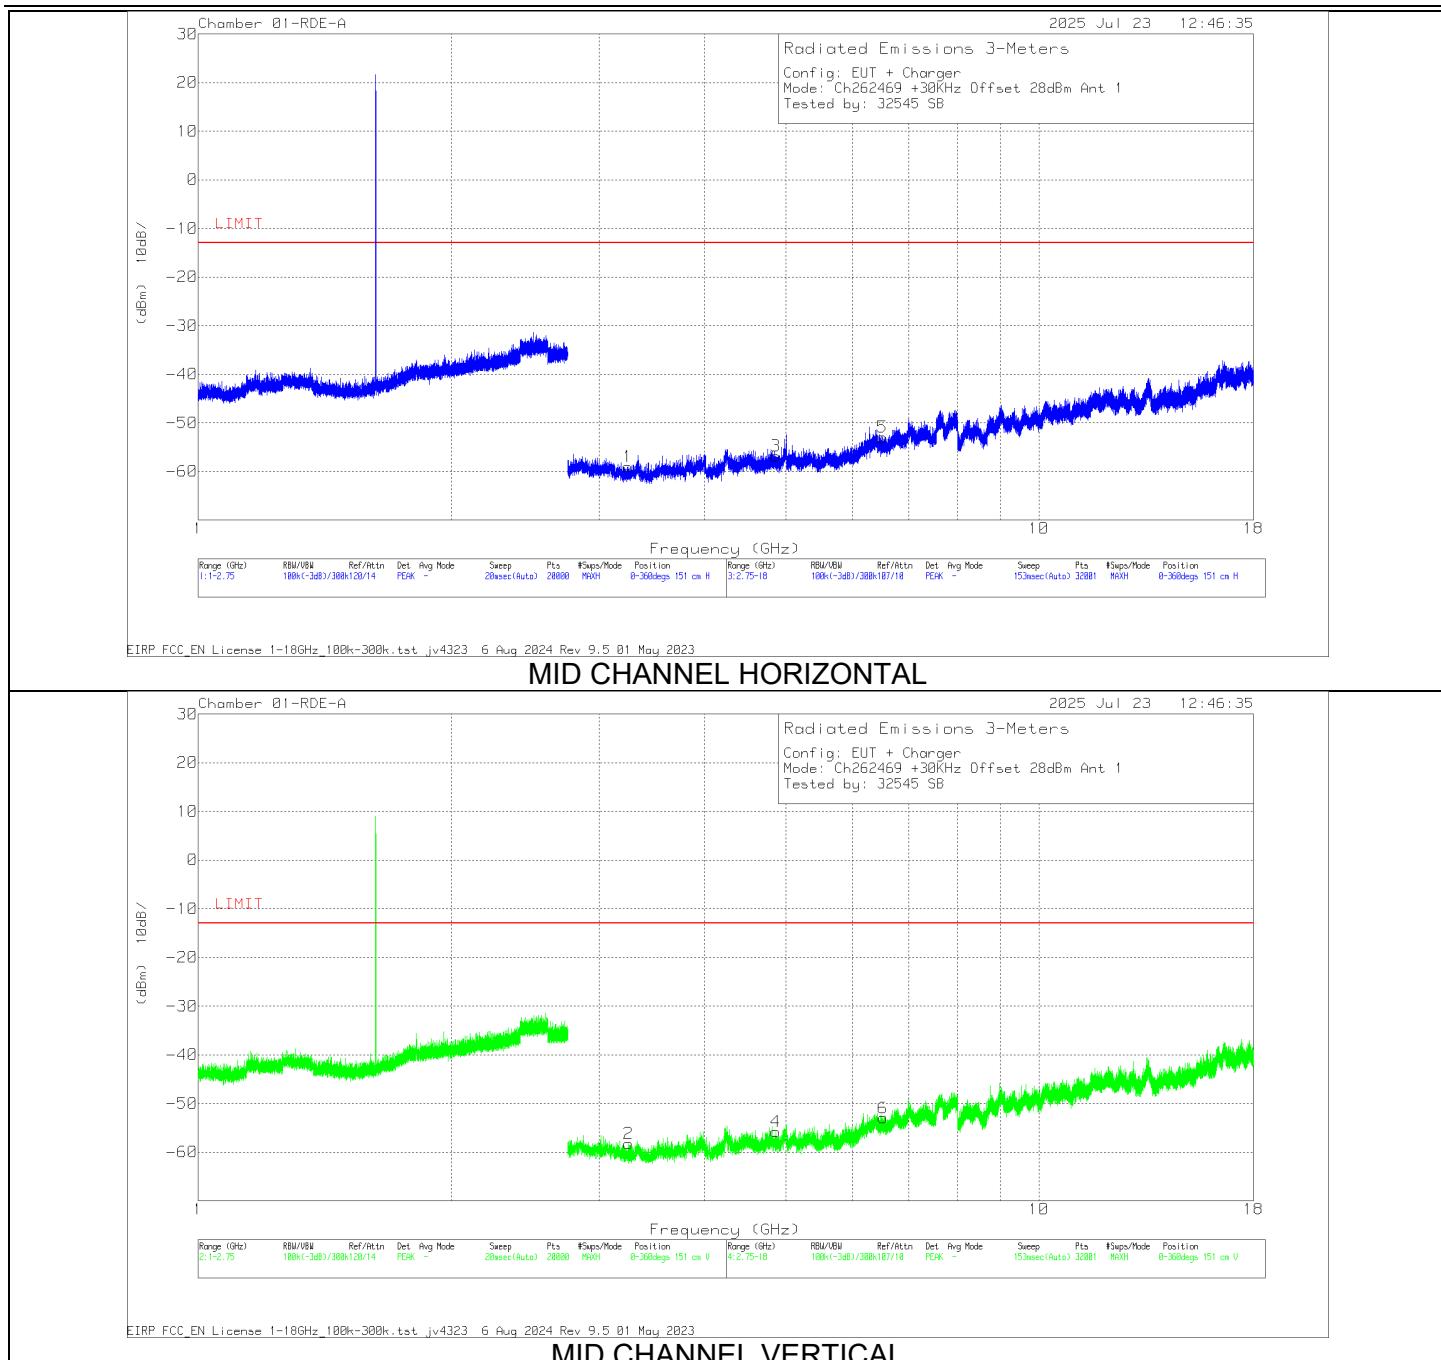

**10.1.3. ANT 2 (Below 1GHz)**

Date:	2025-05-15
Test Engineer:	25369
Configuration:	EUT + Charger
Mode:	TX
Chamber #:	01-RDE-B

**LOW CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.097	31.03	Pk	27.2	-31.5	-95.2	-68.47	-13	-55.47	0-360	149	H
4	31.552	35.98	Pk	26.2	-31.5	-95.2	-64.52	-13	-51.52	0-360	149	V
2	170.068	41.89	Pk	17.8	-30.3	-95.2	-65.81	-13	-52.81	0-360	149	H
6	170.165	38.08	Pk	17.8	-30.3	-95.2	-69.62	-13	-56.62	0-360	149	V
3	219.053	41.69	Pk	16.4	-30.1	-95.2	-67.21	-13	-54.21	0-360	149	H
5	78.306	43.65	Pk	13.6	-31.0	-95.2	-68.95	-13	-55.95	0-360	149	V

Pk - Peak detector

\* - Noise floor

**MID CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.746	32.38	Pk	26.1	-31.5	-95.2	-68.22	-13	-55.22	0-360	149	H
4	31.261	37.58	Pk	26.3	-31.5	-95.2	-62.82	-13	-49.82	0-360	149	V
2	70.262	40.06	Pk	17.8	-30.3	-95.2	-67.64	-13	-54.64	0-360	149	H
6	70.124	30.07	Pk	28.7	-26.2	-95.2	-62.63	-13	-49.63	0-360	149	V
3	219.441	41.74	Pk	16.4	-30.1	-95.2	-67.16	-13	-54.16	0-360	149	H
5	79.858	43.20	Pk	13.4	-31.0	-95.2	-69.60	-13	-56.60	0-360	149	V

Pk - Peak detector


\* - Noise floor

**HIGH CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.097	30.97	Pk	27.2	-31.5	-95.2	-68.53	-13	-55.53	0-360	149	H
4	31.358	35.56	Pk	26.3	-31.5	-95.2	-64.84	-13	-51.84	0-360	149	V
2	170.456	42.06	Pk	17.8	-30.3	-95.2	-65.64	-13	-52.64	0-360	149	H
6	170.747	39.74	Pk	17.8	-30.3	-95.2	-67.96	-13	-54.96	0-360	149	V
3	219.441	41.13	Pk	16.4	-30.1	-95.2	-67.77	-13	-54.77	0-360	149	H
5	80.634	45.26	Pk	13.4	-30.9	-95.2	-67.44	-13	-54.44	0-360	149	V


Pk - Peak detector

\* - Noise floor

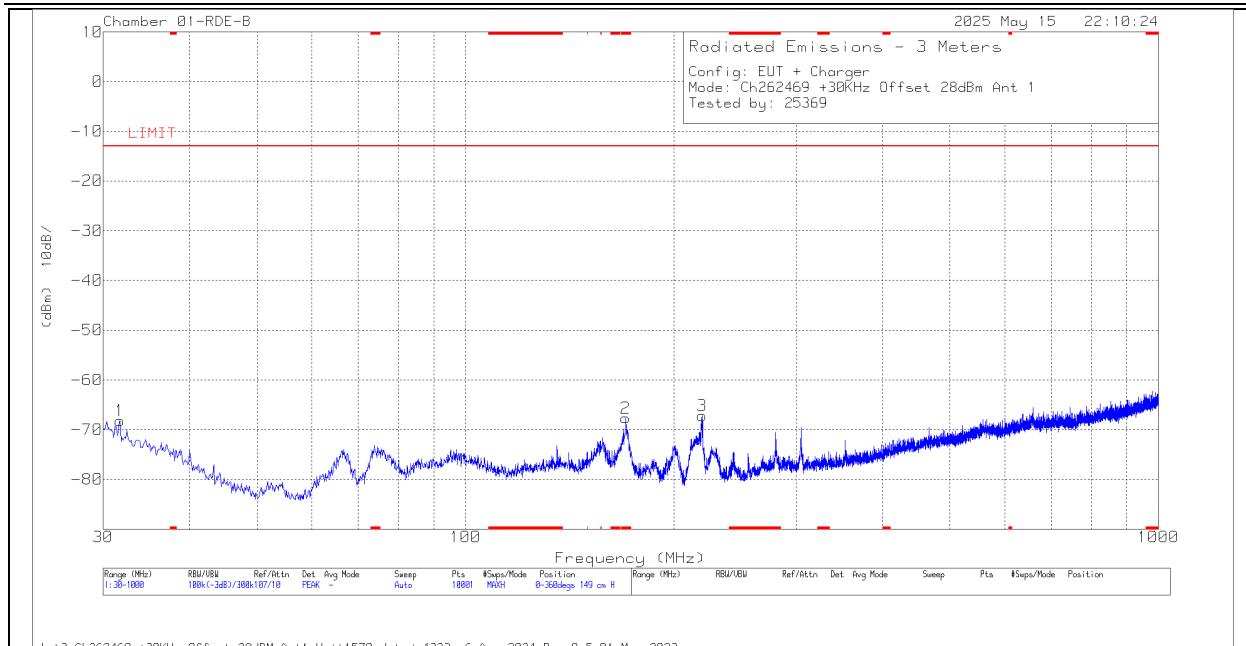

slot3\_Ch262469 +30KHz Offset 28dBm Ant1 Unit1570.dat jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL HORIZONTAL

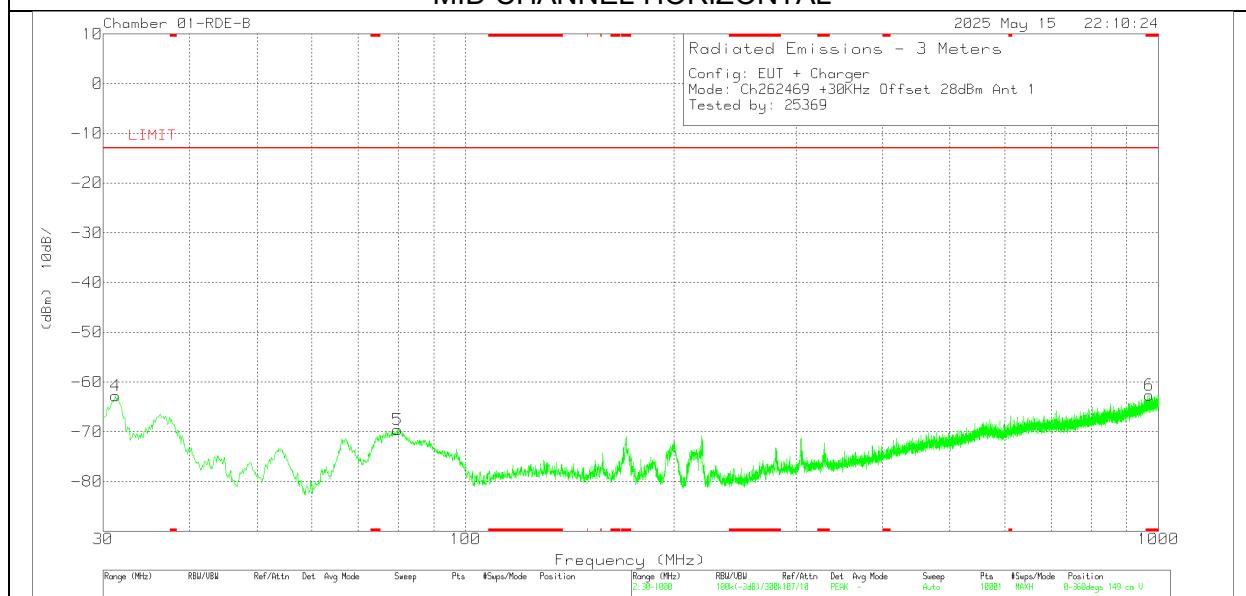

slot3\_Ch262469 +30KHz Offset 28dBm Ant1 Unit1570.dat jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL VERTICAL

**10.1.4. ANT 3 (Below 1GHz)**

Date:	2025-05-15
Test Engineer:	25369
Configuration:	EUT + Charger
Mode:	TX
Chamber #:	01-RDE-B

**LOW CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.582	31.44	Pk	26.8	-31.5	-95.2	-68.46	-13	-55.46	0-360	150	H
4	31.358	38.41	Pk	26.3	-31.5	-95.2	-61.99	-13	-48.99	0-360	149	V
3	863.23	31.34	Pk	27.6	-27.3	-95.2	-63.56	-13	-50.56	0-360	150	H
5	81.604	43.28	Pk	13.3	-30.9	-95.2	-69.52	-13	-56.52	0-360	149	V
2	220.023	41.83	Pk	16.4	-30.1	-95.2	-67.07	-13	-54.07	0-360	150	H
6	958.387	30.79	Pk	28.7	-26.5	-95.2	-62.21	-13	-49.21	0-360	149	V

Pk - Peak detector

\* - Noise floor

**MID CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.485	30.58	Pk	26.9	-31.5	-95.2	-69.22	-13	-56.22	0-360	149	H
4	31.067	38.4	Pk	26.5	-31.5	-95.2	-61.80	-13	-48.80	0-360	149	V
3	219.441	44.13	Pk	16.4	-30.1	-95.2	-64.77	-13	-51.77	0-360	149	H
6	220.12	38.08	Pk	16.4	-30.1	-95.2	-70.82	-13	-57.82	0-360	149	V
2	* 170.553	39.6	Pk	17.8	-30.3	-95.2	-68.10	-13	-55.10	0-360	149	H
5	80.149	44.17	Pk	13.4	-31	-95.2	-68.63	-13	-55.63	0-360	149	V

Pk - Peak detector


\* - Noise floor

**HIGH CHANNEL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85150 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.194	31.84	Pk	27.1	-31.5	-95.2	-67.76	-13	-54.76	0-360	149	H
4	30.97	38	Pk	26.5	-31.5	-95.2	-62.20	-13	-49.20	0-360	149	V
2	* 171.135	40.07	Pk	17.8	-30.3	-95.2	-67.63	-13	-54.63	0-360	149	H
6	* 172.008	38.35	Pk	17.7	-30.3	-95.2	-69.45	-13	-56.45	0-360	149	V
3	219.538	41.95	Pk	16.4	-30.1	-95.2	-66.95	-13	-53.95	0-360	149	H
5	79.664	44.03	Pk	13.4	-31	-95.2	-68.77	-13	-55.77	0-360	149	V


Pk - Peak detector

\* - Noise floor

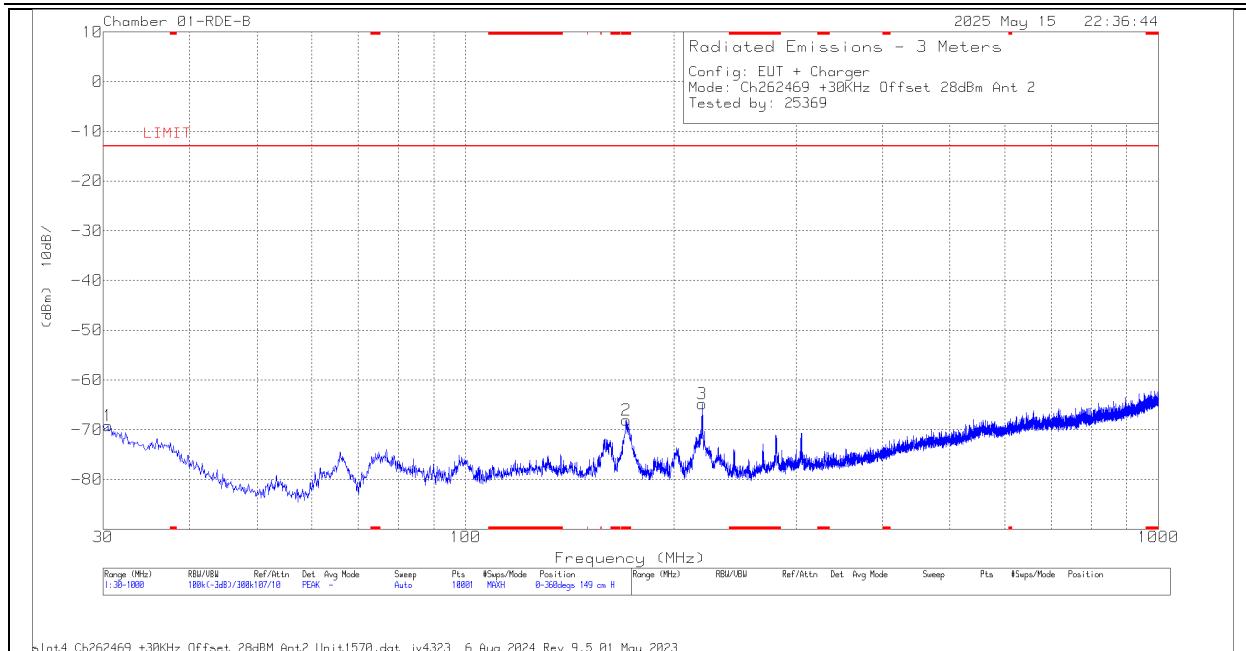

s104\_Ch262469\_+30KHz\_Offset\_28dBm\_Ant2\_Unit1570.dat\_jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL HORIZONTAL

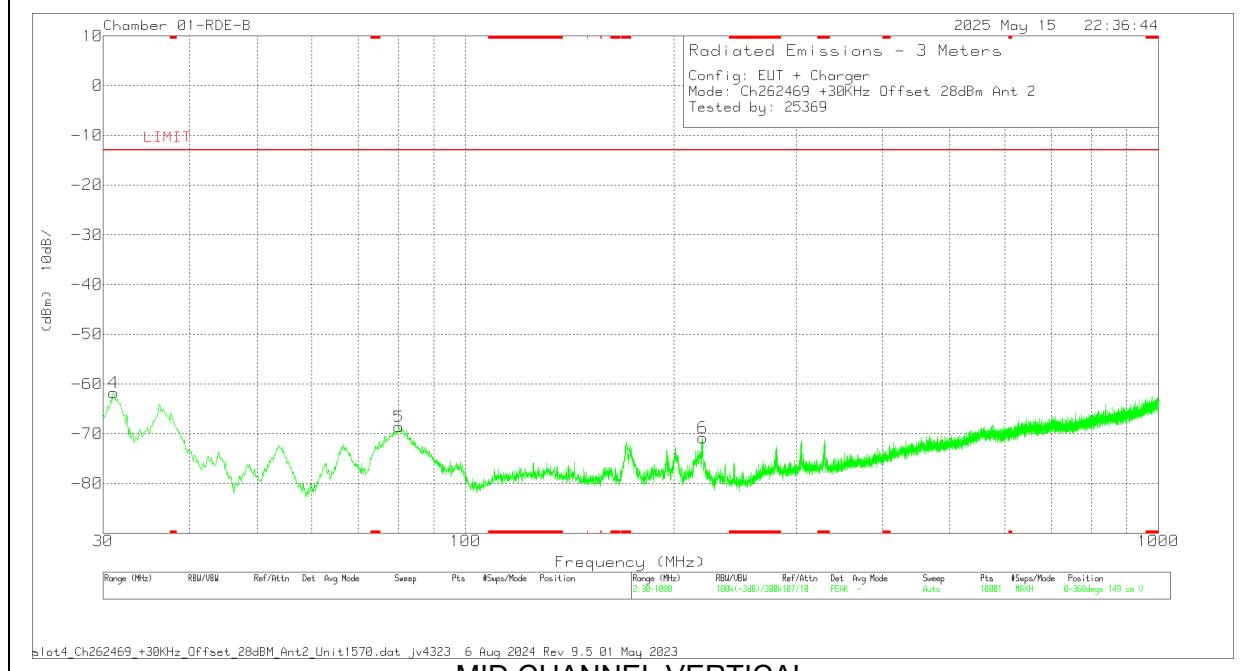

s104\_Ch262469\_+30KHz\_Offset\_28dBm\_Ant2\_Unit1570.dat\_jv4323 6 Aug 2024 Rev 9.5 01 May 2023

## MID CHANNEL VERTICAL

## 10.2. ADDITIONAL UNWANTED EMISSION (1559MHz – 1610MHz)

### LIMITS

#### FCC §25.216

Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service

(a) The e.i.r.p. density of emissions from mobile earth stations placed in service on or before July 21, 2002 ...

(b) The e.i.r.p. density of emissions from mobile earth stations placed in service on or before July 21, 2002 ...

(c) The e.i.r.p. density of emissions from mobile earth stations placed in service after July 21, 2002 with assigned uplink frequencies between 1610 MHz and 1660.5 MHz shall not exceed -70 dBW/MHz, averaged over any 2 millisecond active transmission interval, in the band 1559-1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval, in the 1559-1605 MHz band.

#### FCC §25.216

(g) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies in the 1610-1626.5 MHz band shall suppress the power density of emissions in the 1605-1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -10 dBW/MHz at 1610 MHz averaged over any 2 millisecond active transmission interval. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -20 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

#### ISED RSS-170§ 5.9.1: Band 1610-1626.5 MHz

For MESs with transmitting frequencies between 1610 MHz and 1626.5 MHz, the e.i.r.p. density of unwanted emissions shall not exceed the limits shown below, which are the same as those for the band 1605-1610 MHz, averaged over any 2 ms active transmission interval:

- a. -70 dBW/MHz at 1605 MHz, linearly interpolated to -10 dBW/MHz at 1610 MHz, for broadband emissions
- b. -80 dBW/kHz at 1605 MHz, linearly interpolated to -20 dBW/kHz at 1610 MHz, for discrete emissions

### TEST PROCEDURE

KDB 971168 D01/D02

Measure wideband emissions using either:

RBW = 1MHz, VB = 3MHz

RBW < 1MHz, integrate over 1MHz if necessary

Measure narrowband emissions using:

RBW = 10kHz, VB = 30kHz as worst-case setting

Set detector = rms, sweep time ~ number of points x 2ms, and sweep multiple times with max hold enabled. When the detector is set to rms the number of points is set to exceed the minimum number required by ANSI C63.26 for average measurements. A peak detector may be used (e.g. to avoid slow sweep times for the narrowband emissions measurements) in lieu of average rms detection as this will provide a more conservative (higher) measured value than the rms value.

### RESULTS


Both horizontal / vertical polarizations and low/ mid/ high channels were investigated on ANT 2 and ANT 3. It was found low channel to be worst-case for both antennas.

Date:	2025-07-14	to	2025-07-28
Test Engineer:	26051		
Configuration:	EUT + Charger		
Mode:	TX		
Chamber #:	01-RDE-A		

Offset Calculation= Antenna Factor + Amp/Cbl/Fltr/Pad + EIRP CF

Antenna Factor (dB/m)	Amp/Cbl/Fltr/Pad (dB)	EIRP CF	Offset (dB)
28.1	-8.09	11.8	31.81


### Plots for Determining Wide Band or Narrow Band Emissions

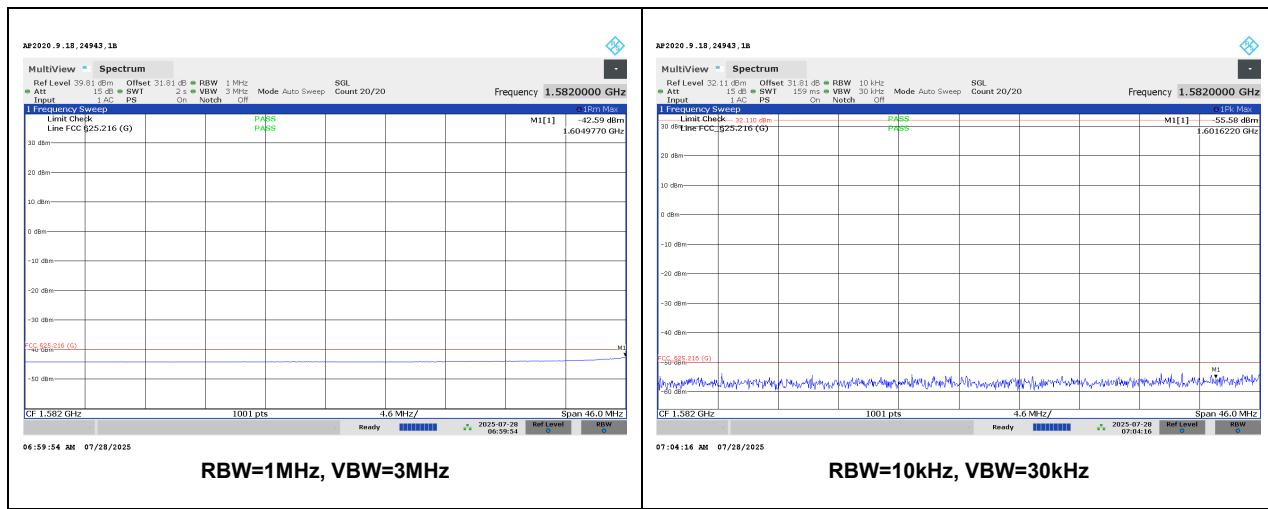


Note: It was found that the marker 1 @ 1604.977MHz frequency which belonged to wideband emission.


## 10.2.1. ANT 2 (HORIZONTAL)

### Wideband Low Channel 1610.17MHz

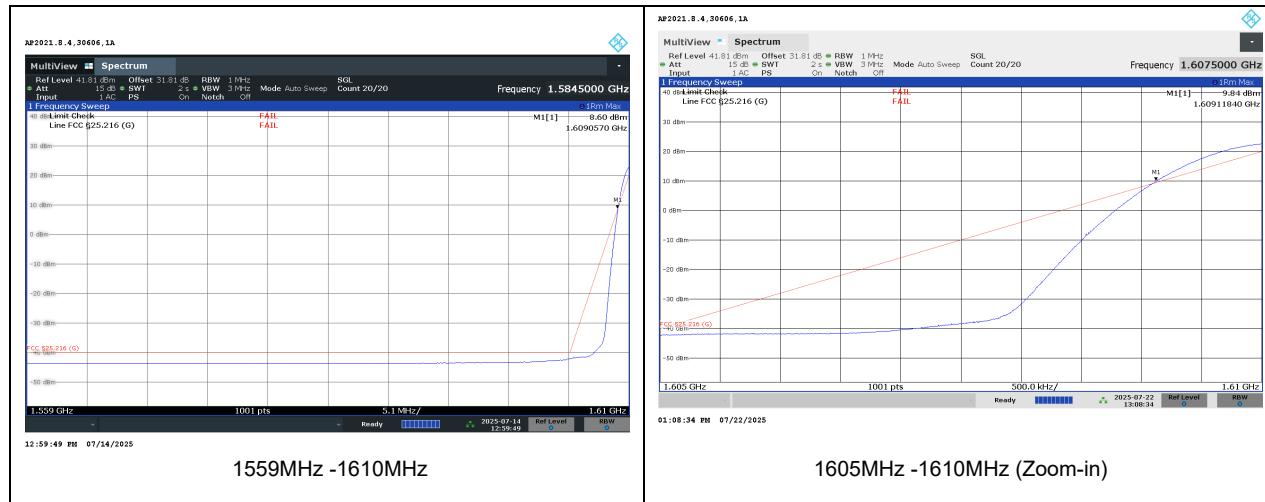


Plots below show passing result using integration method:

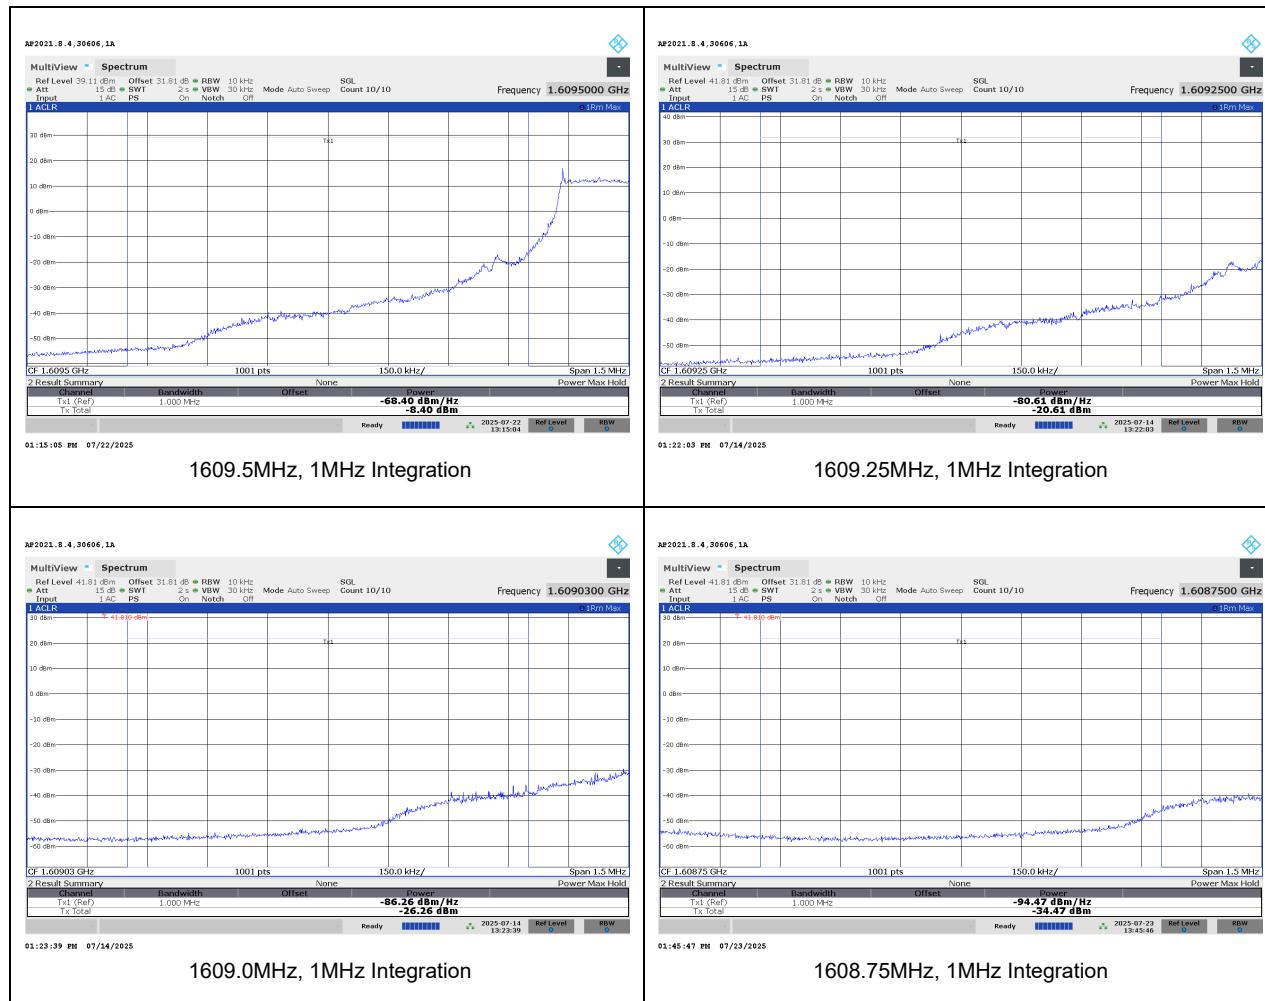

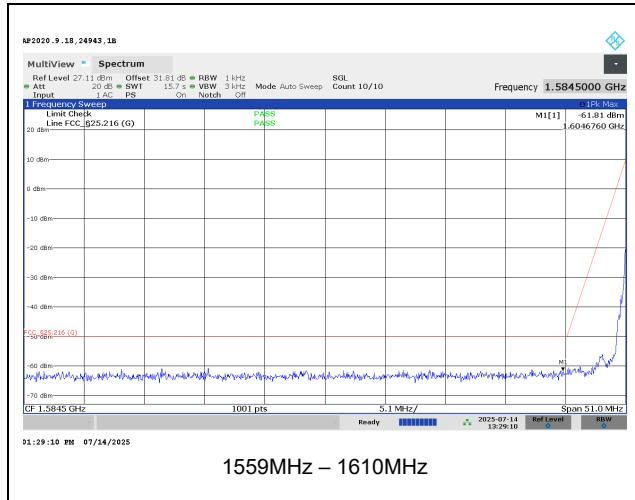
Narrowband Low Channel 1610.17MHz

## 10.2.2. ANT 2 (VERTICAL)

### Wideband Low Channel 1610.17MHz

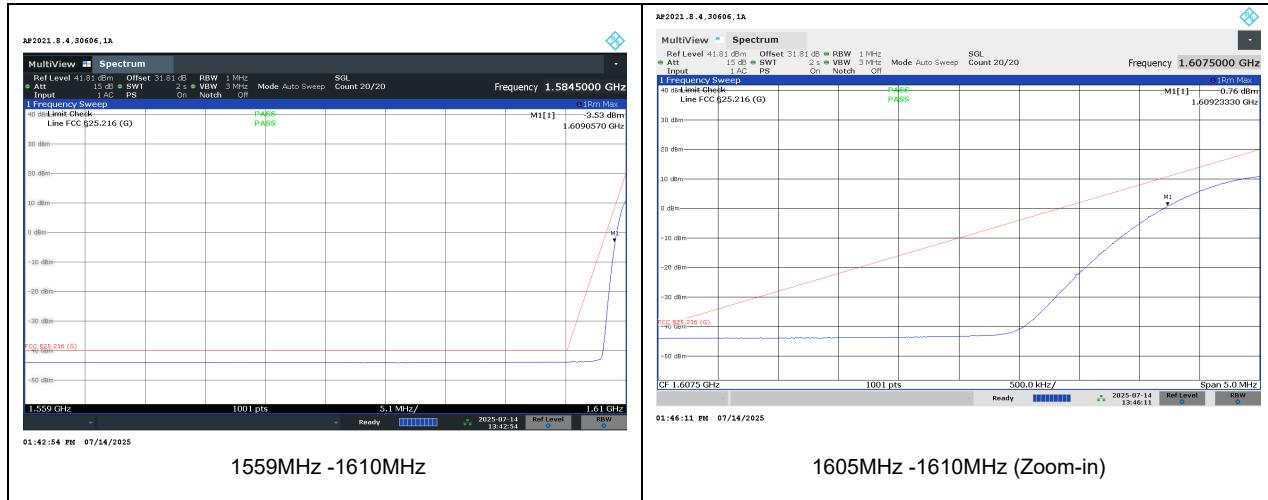


### Narrowband Low Channel 1610.17MHz

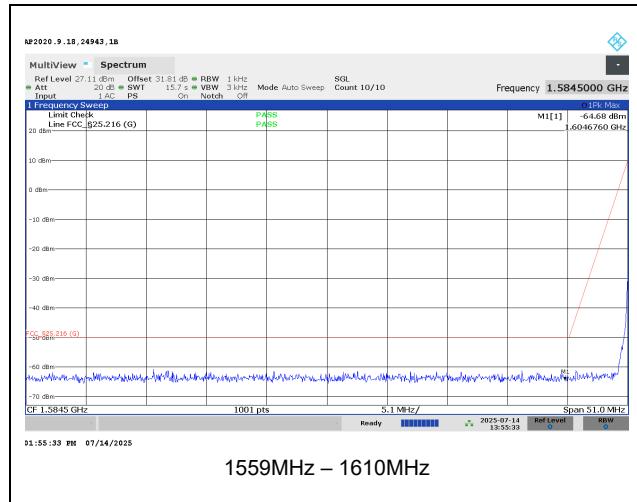



### 10.2.3. ANT 3 (HORIZONTAL)

#### Wideband Low Channel 1610.17MHz

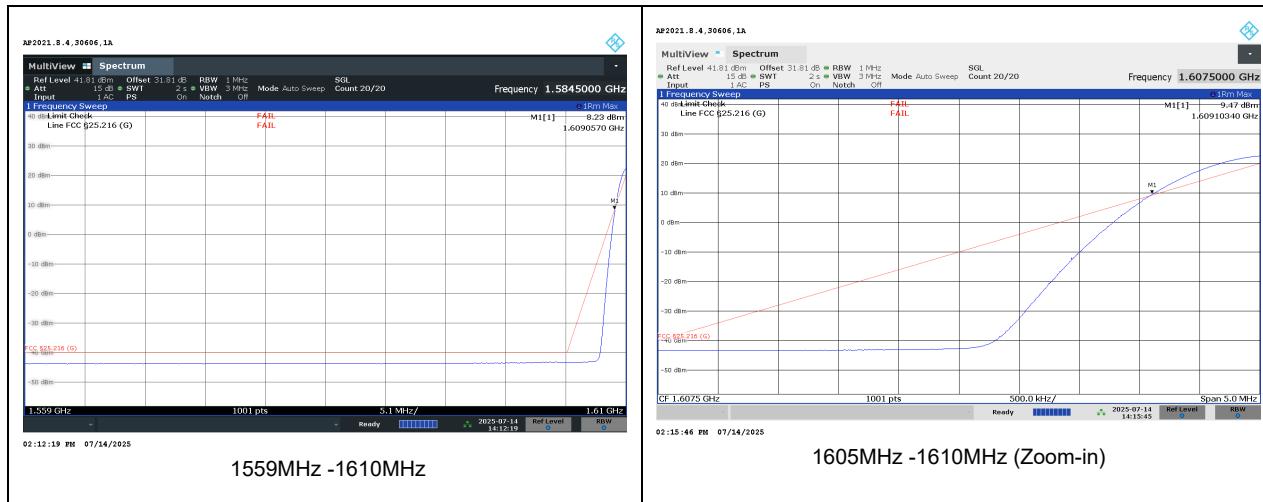


Plots below show passing result using integration method:

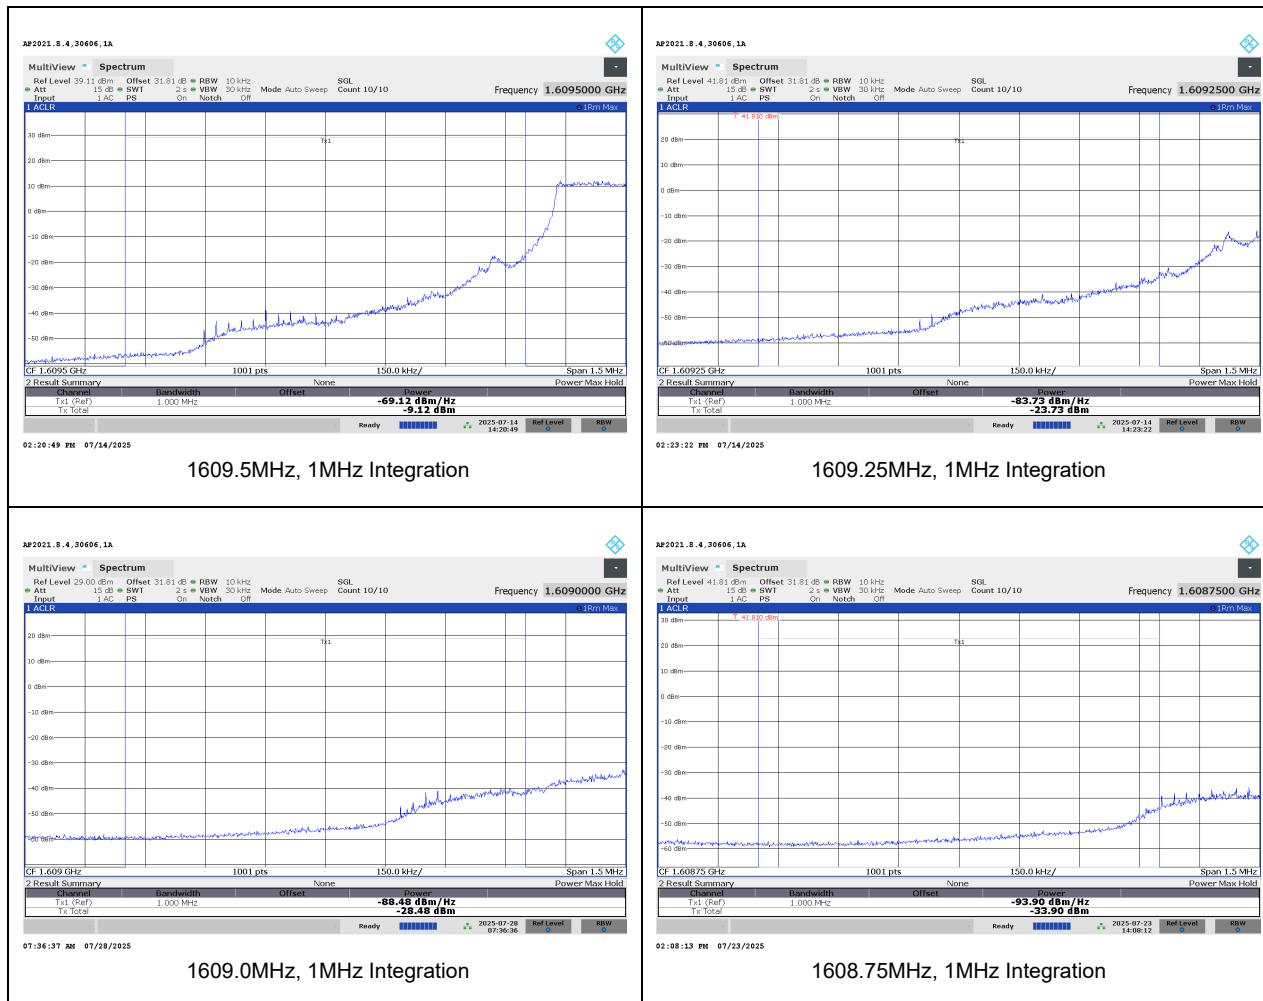

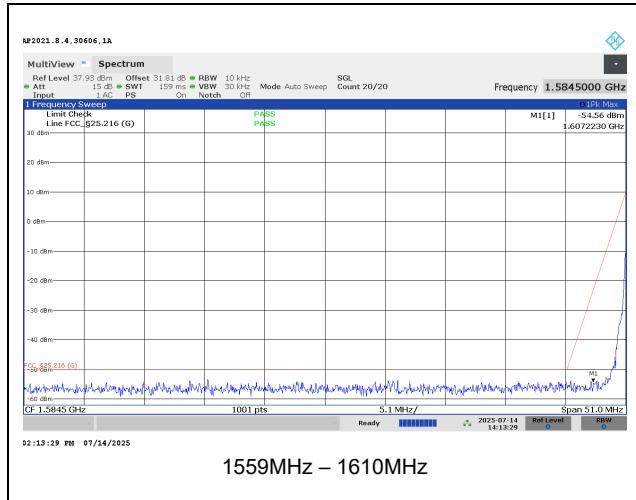
Narrowband Low Channel 1610.17MHz:

## 10.2.4. ANT 3 (VERTICAL)

### Wideband Low Channel 1610.17MHz

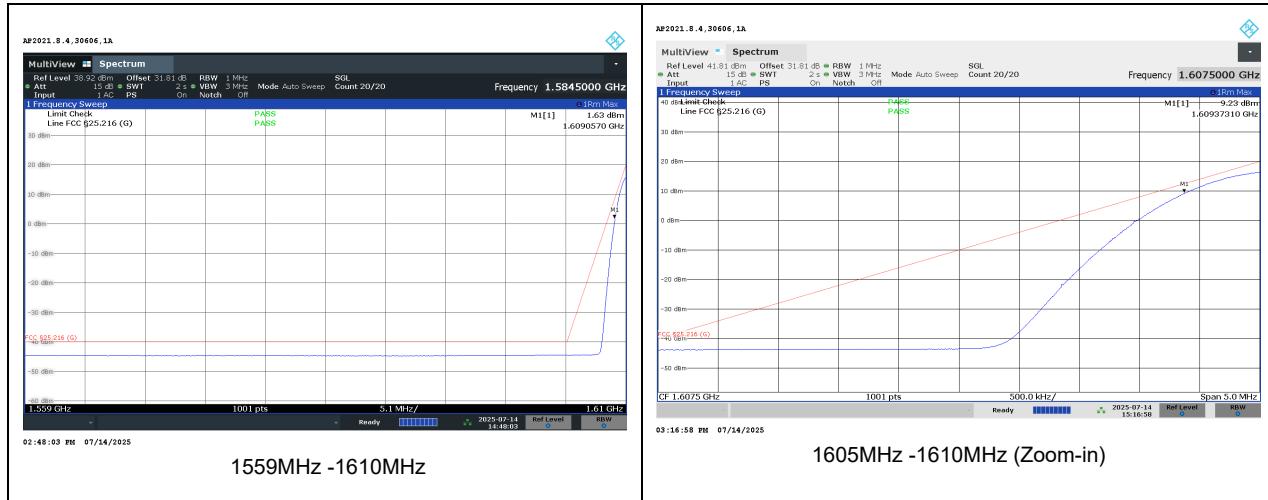

### Narrowband Low Channel 1610.17MHz

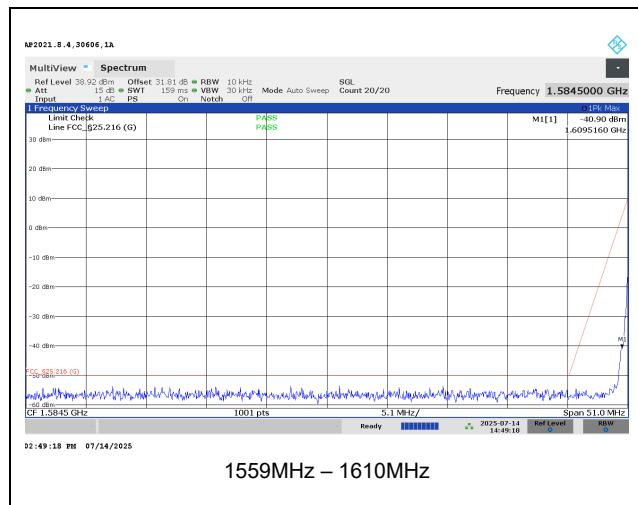

### 10.3. CARRIER-OFF STATE EMISSIONS (1559MHz – 1610MHz)

#### LIMITS

##### FCC §25.216

Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1 and 3 GHz shall not exceed -80 dBW/MHz in the 1559-1610 MHz band averaged over any two millisecond interval.

##### ISED RSS-170§ 5.10: Carrier-off State Emissions

MESs with transmitting frequencies between 1 GHz and 3 GHz shall not exceed -80 dBW/MHz, which is the e.i.r.p. density of carrier-off state emissions in the band 1559-1610 MHz.

#### TEST PROCEDURE

KDB 971168 D01/D02

Set RBW = 1MHz, VB = 3MHz, detector = rms, sweep time ~ number of points x 2ms, and sweep multiple times with max hold enabled.

#### RESULTS

No emissions were found on both horizontal and vertical polarization for ANT 2 and ANT 3.

Date:	2025-05-22
Test Engineer:	26051
Configuration:	EUT + Charger
Mode:	TX
Chamber #:	01-RDE-A



## 11. SETUP PHOTOS

Refer to 15496249-EP1V1 for setup photos

## APPENDIX A – SPOT CHECK EVALUATION

## 1. SPOT CHECK EVALUATION

### 1.1. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3257, A3525, A3526 and A3527.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for FR2 is removed from variants and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3257	BCG-E8950A	579C-E8950A	-With FR2/LTE/5GNR B14/29/71 -No B11/21 -With UL MIMO (n41/48/77)	eSIM	-
A3525	BCG-E8960A	579C-E8960A	-Without FR2 -Added B11/21 -No UL MIMO	eSIM	A3257
A3526	BCG-E8961A	579C-E8961A	-Without FR2 -No LTE/5GNR B14/29/71 -No LTE B11/21 -No UL MIMO	eSIM+pSIM	

The spot check plan allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dB} = | V_{dB} - R_{dB} | \quad (1)$$

$$d_{dB} \leq d_{dBmax} \quad (2)$$

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where  $d_{dB}$  is deviation between the variant and the reference model,  $V_{dB}$  is variant spot check level,  $R_{dB}$  is the corresponding reference measurement level,  $d_{dBmax}$  is the maximum deviation  $d_{dB}$  allowed, and  $M_{dB}$  is the margin in dB.

## 1.1. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3525

A3525 SPOT CHECK RESULTS								
Equipment Class / Technology	Worst Mode	Test Item	Measured Frequency (MHz)	Original Model: A3257	Sub Model: A3525	Delta (dB or MHz)	Margin	Remarks
				FCC ID : BCG-E8950A IC : 579C-E8950A	FCC ID: BCG-E8960A IC : 579C-E8960A			
TNE / MSS	Ant 2	Avg EIRP Power (dBm)	1618.4 (-2.4dBi)	25.60	25.60	0.00	0.00	Note 1
		Additional Unwanted Emissions (dBm)	1609.5 (Horizontal)	-8.40	-8.18	0.22	-22.40	Note 1
		Out-Of-Band Emissions (dBm)	1000 - 18000 (Mid Channel)	-50.87	-50.92	0.05	-37.87	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

## 1.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3526

A3526 SPOT CHECK RESULTS								
Equipment Class / Technology	Worst Mode	Test Item	Measured Frequency (MHz)	Original Model: A3257	Sub Model: A3526	Delta (dB or MHz)	Margin	Remarks
				FCC ID : BCG-E8950A IC : 579C-E8950A	FCC ID: BCG-E8961A IC : 579C-E8961A			
TNE / MSS	Ant 2	Avg EIRP Power (dBm)	1618.4 (-2.4dBi)	25.60	25.60	0.00	0.00	Note 1
		Additional Unwanted Emissions (dBm)	1609.5 (Horizontal)	-8.40	-7.15	1.25	-22.40	Note 1
		Out-Of-Band Emissions (dBm)	1000 - 18000 (Mid Channel)	-50.87	-51.70	0.83	-37.87	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.