
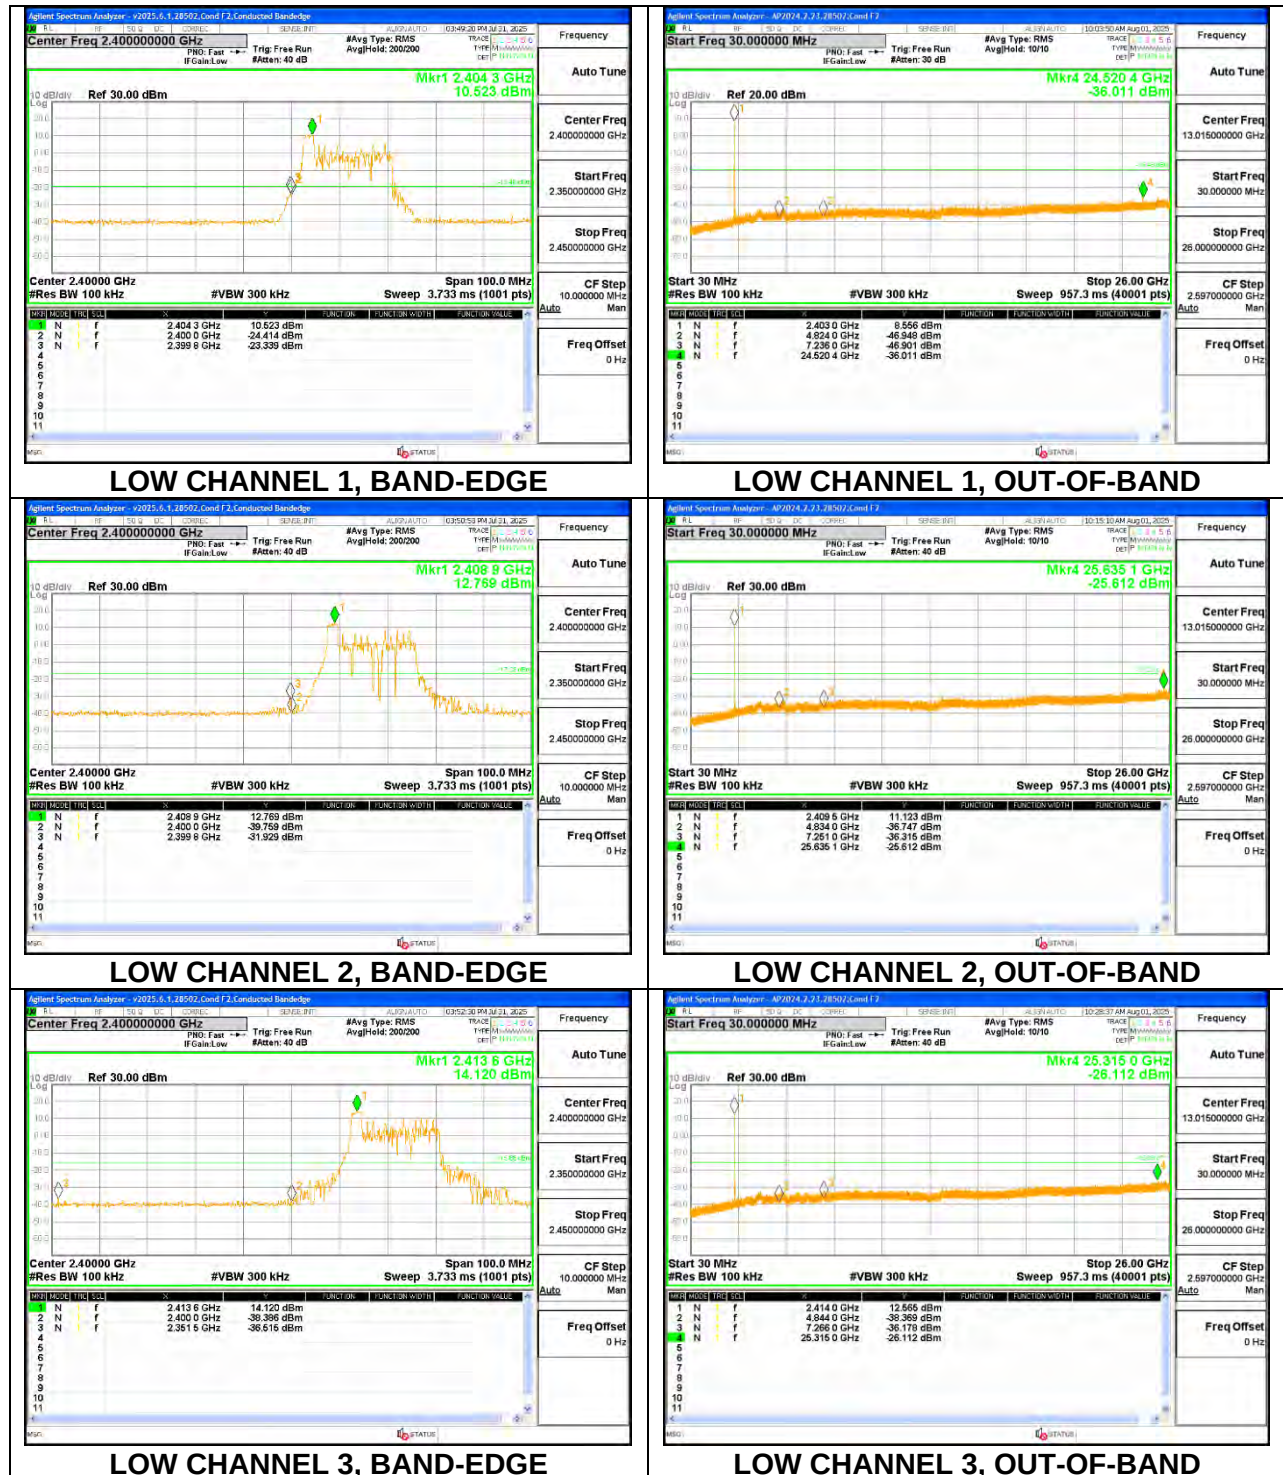
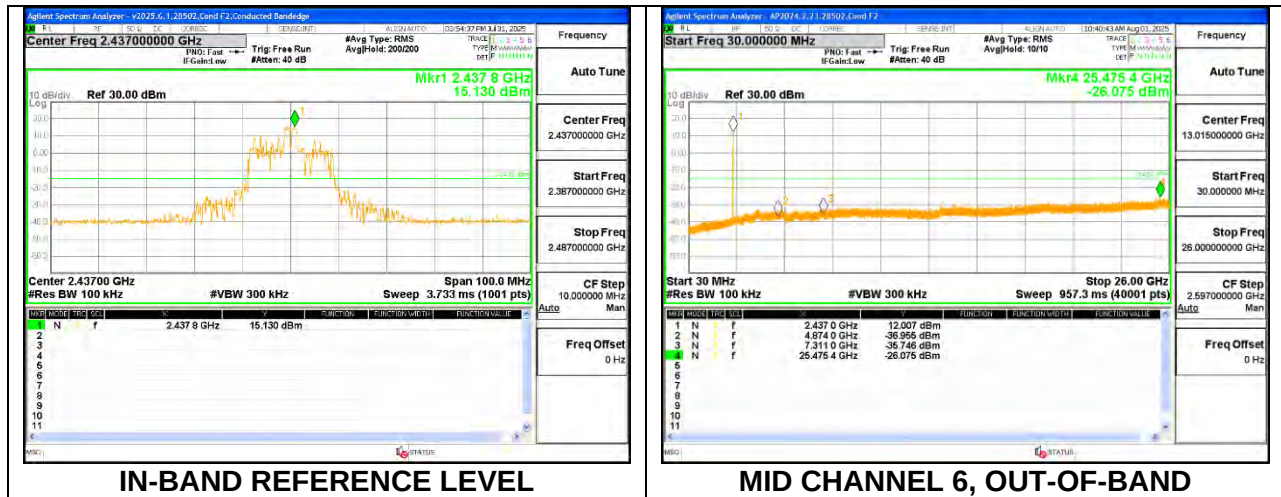
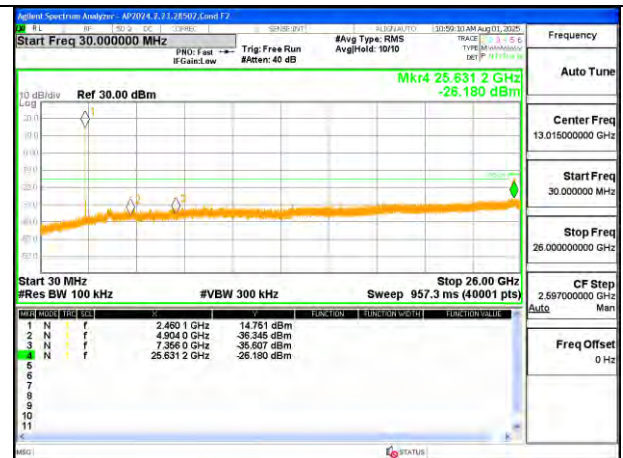



ANT 1: 26-Tone RU Index 0

ANT 1: 26-Tone RU Index 4


ANT 1: 26-Tone RU Index 8**HIGH CHANNEL 9, BAND-EDGE****HIGH CHANNEL 9, OUT-OF-BAND****HIGH CHANNEL 10, BAND-EDGE****HIGH CHANNEL 10, OUT-OF-BAND****HIGH CHANNEL 11, BAND-EDGE****HIGH CHANNEL 11, OUT-OF-BAND**

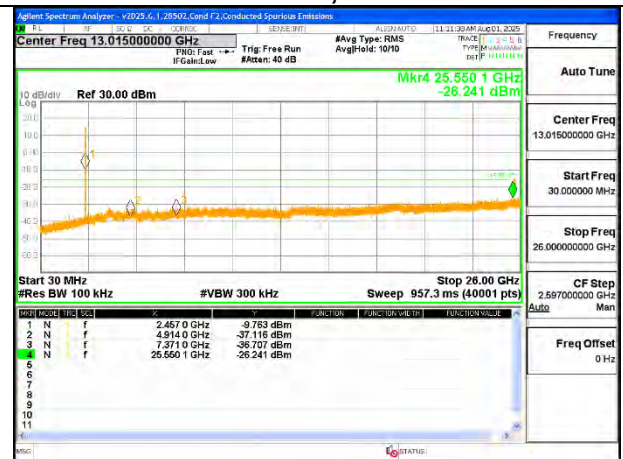


HIGH CHANNEL 12, BAND-EDGE

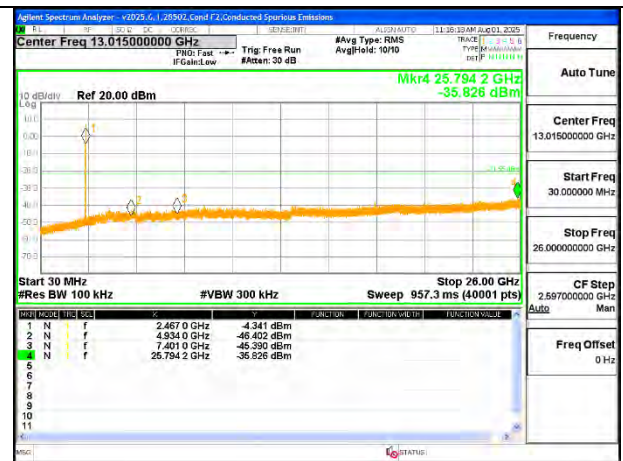


HIGH CHANNEL 12, OUT-OF-BAND

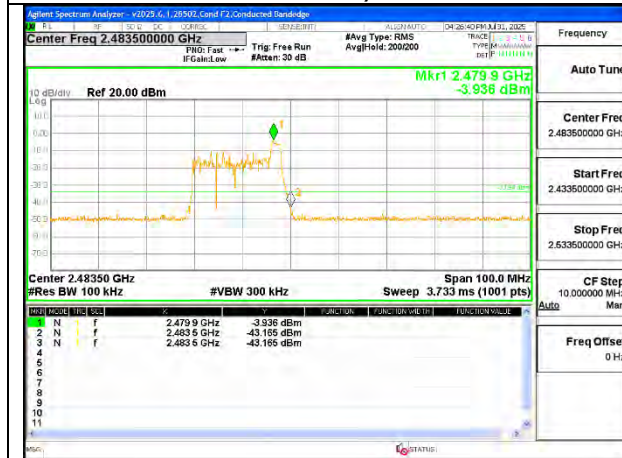

HIGH CHANNEL 13, BAND-EDGE

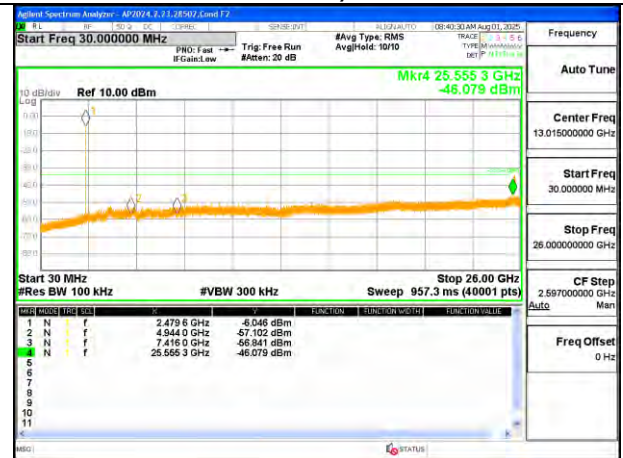

HIGH CHANNEL 13, OUT-OF-BAND

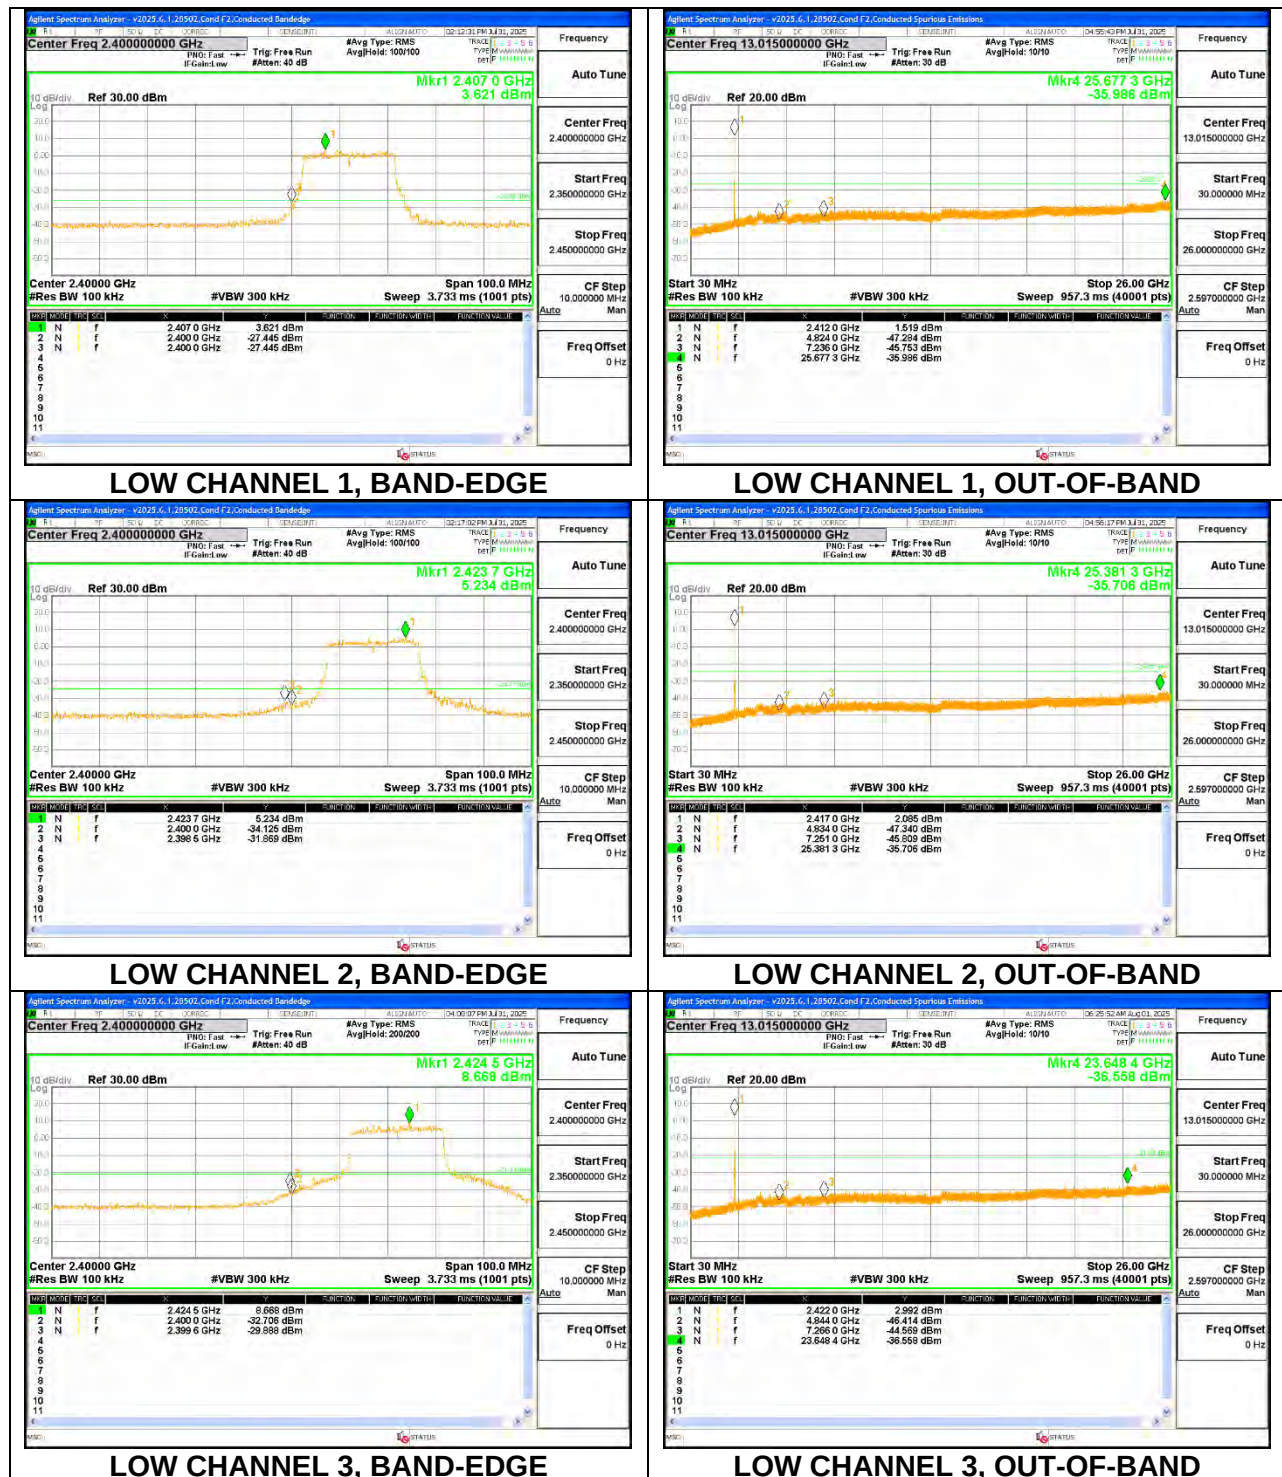ANT 1: SU



IN-BAND REFERENCE LEVEL



MID CHANNEL 6, OUT-OF-BAND



HIGH CHANNEL 9, BAND-EDGE




HIGH CHANNEL 9, OUT-OF-BAND



HIGH CHANNEL 10, BAND-EDGE





HIGH CHANNEL 10, OUT-OF-BAND






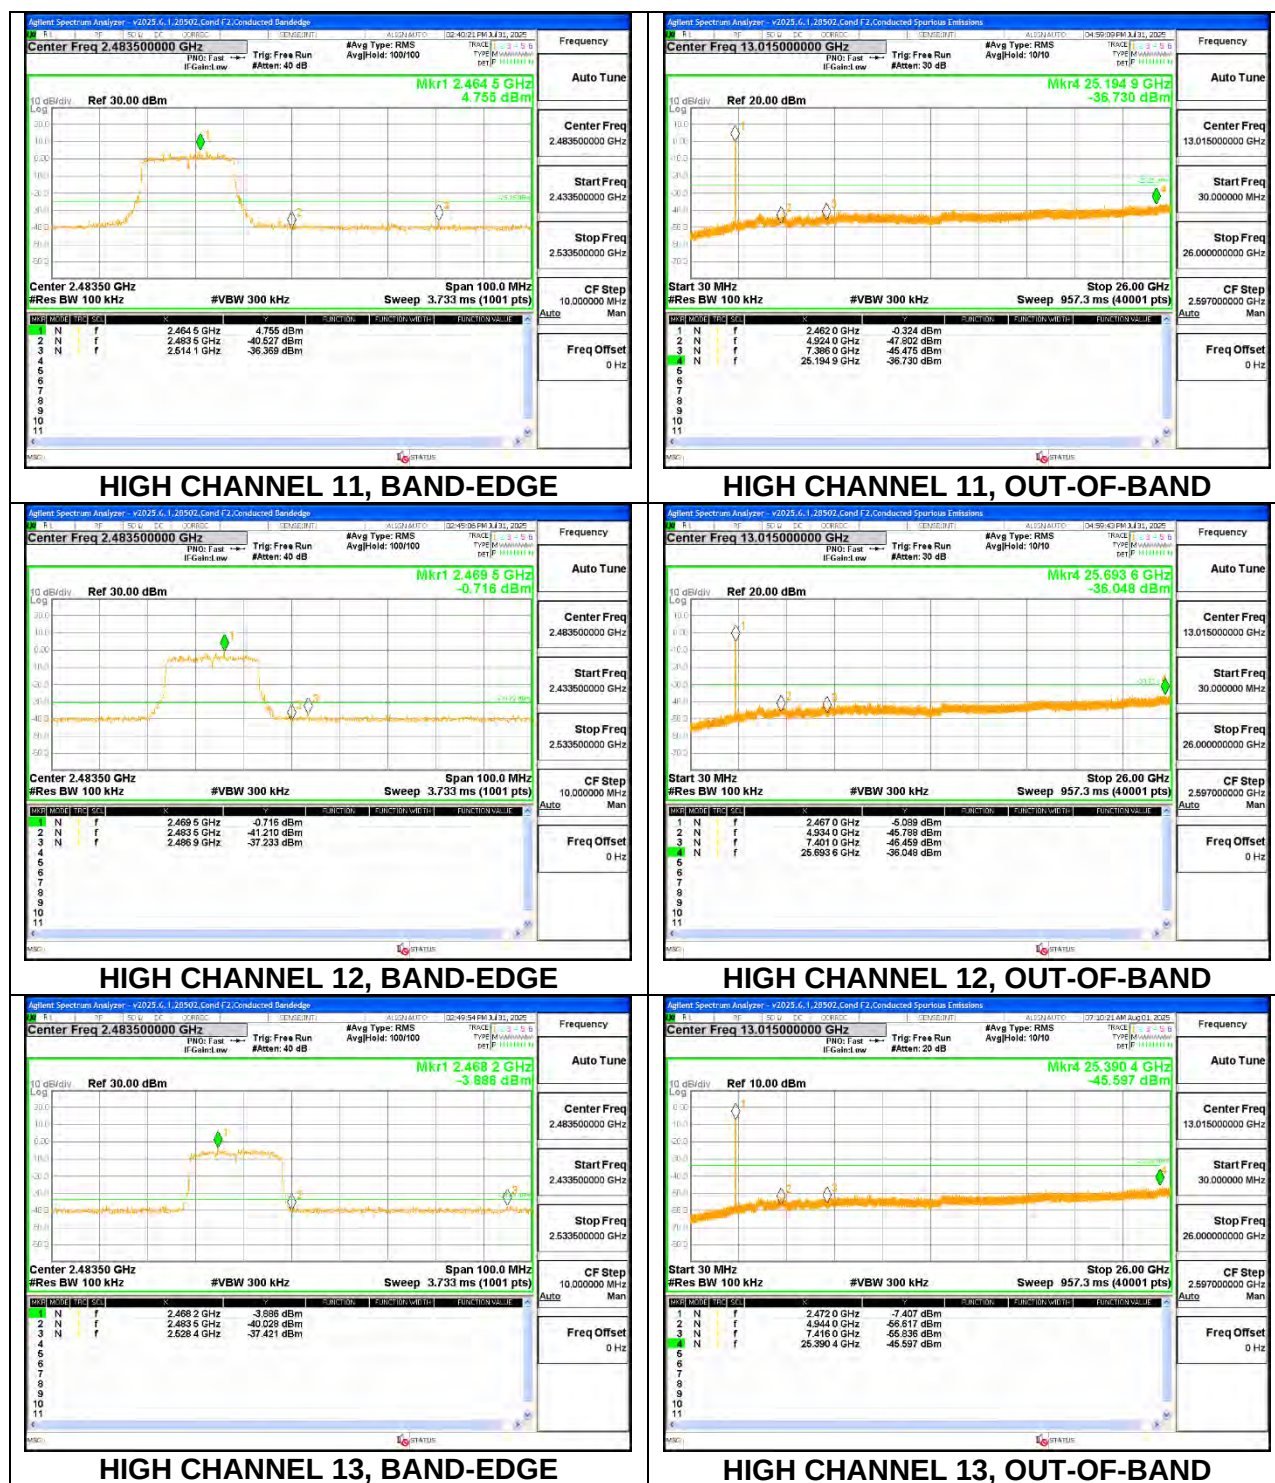



9.5.6. 802.11be EHT20 OFDMA MODE 2TX


ANT 2 + ANT 1 2TX MODE, 26-Tones, RU Index 0

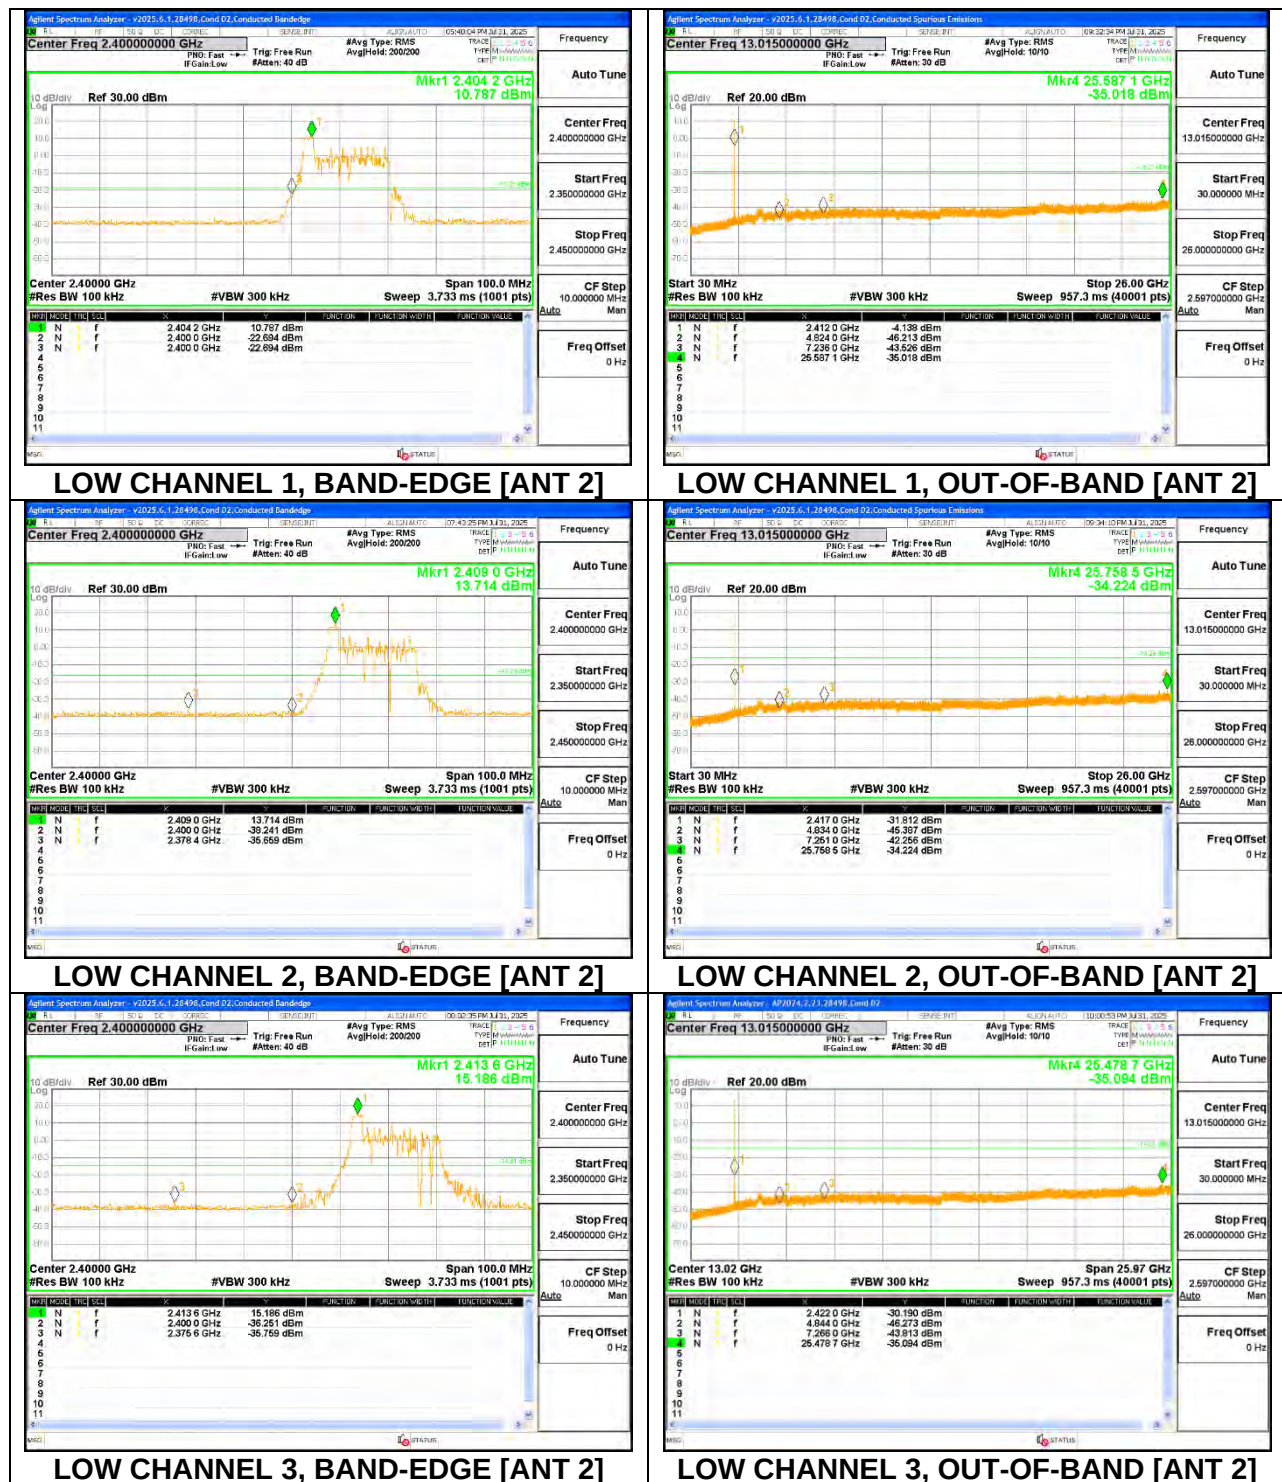


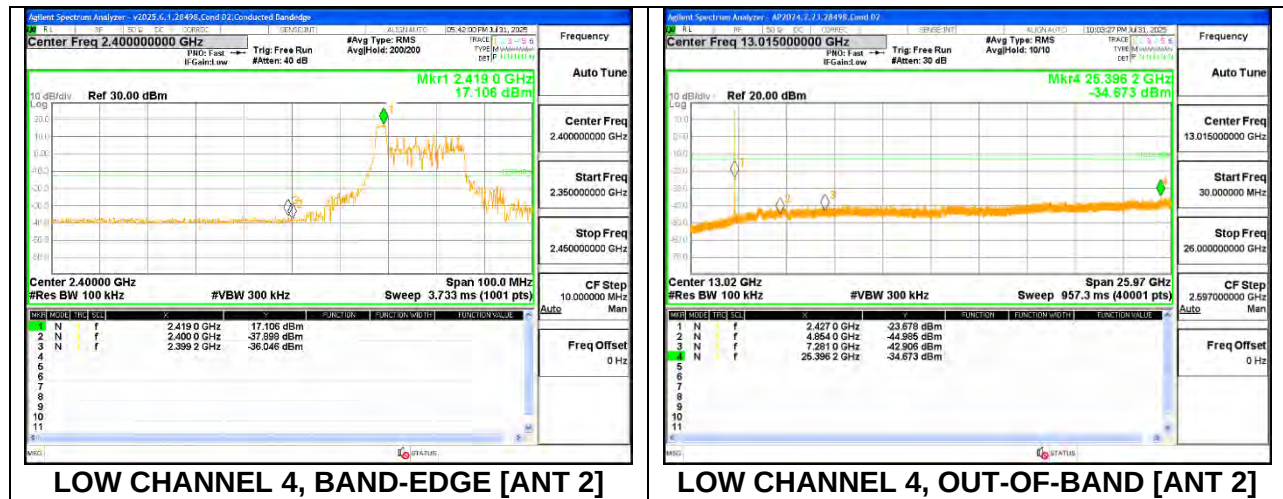

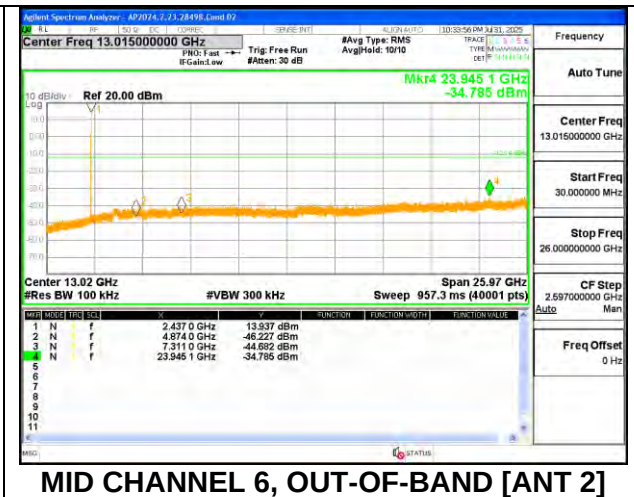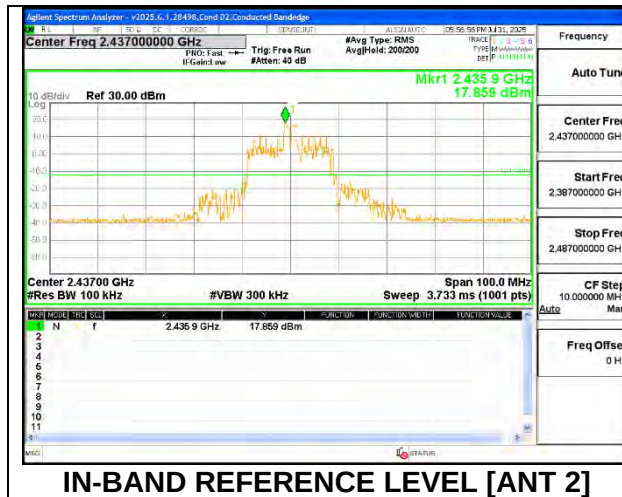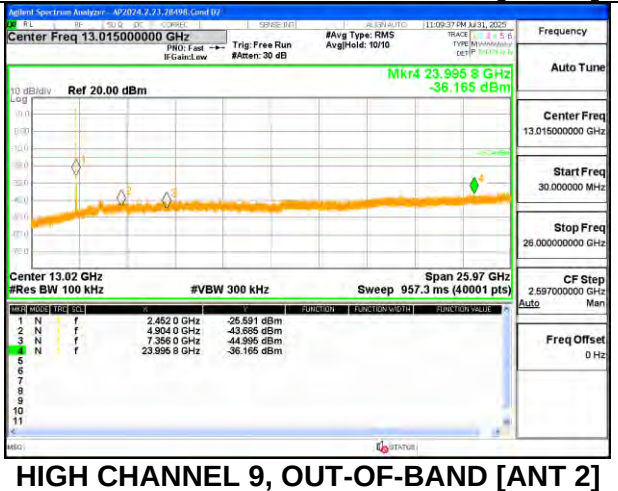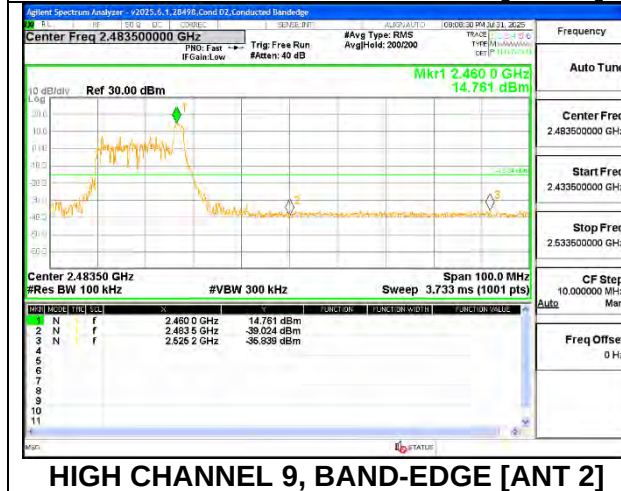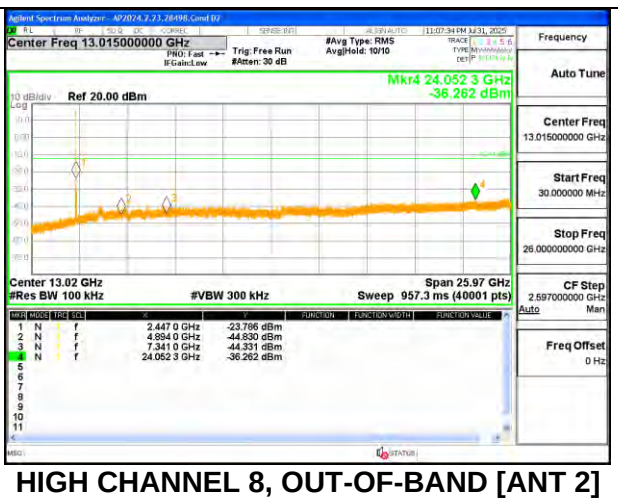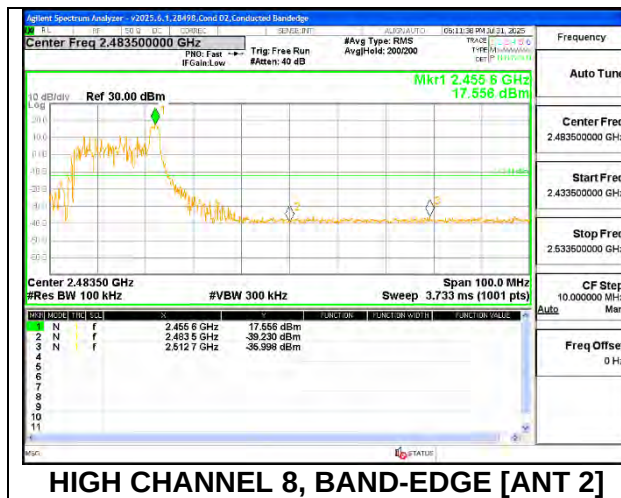ANT 2: 26-Tone, RU Index 4**ANT 2: 26-Tone, RU Index 8**

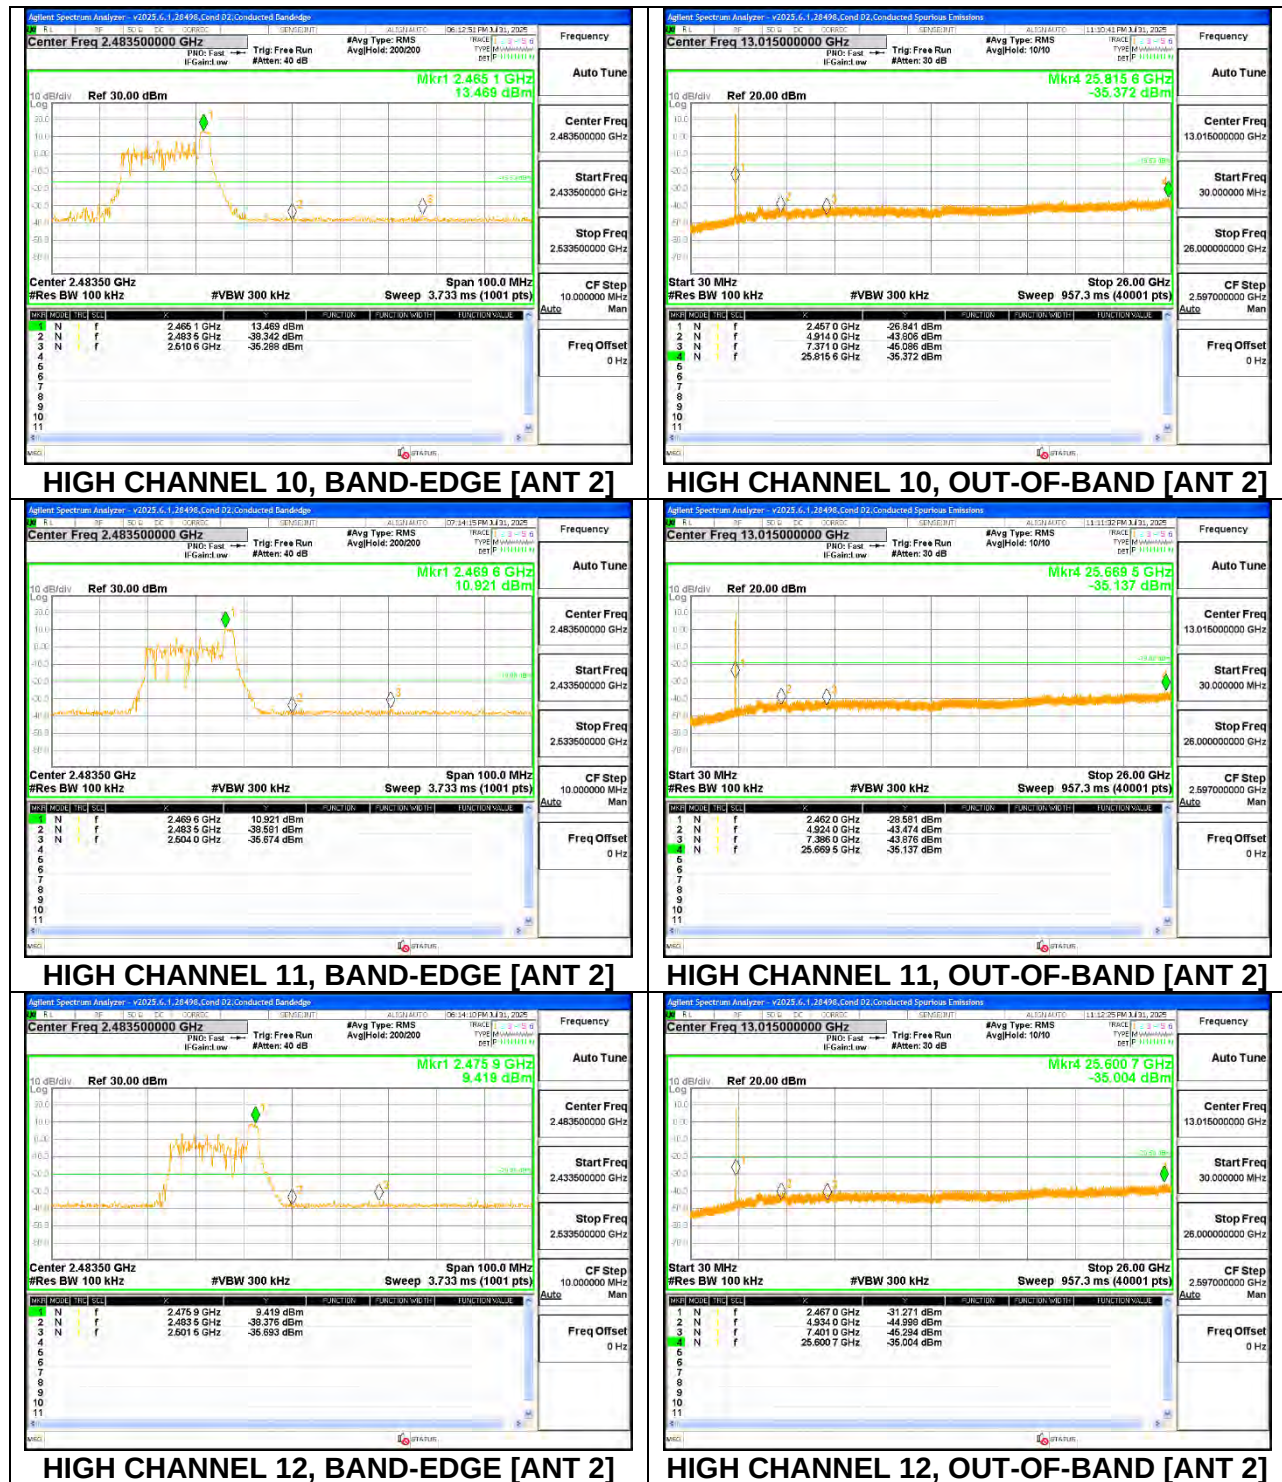

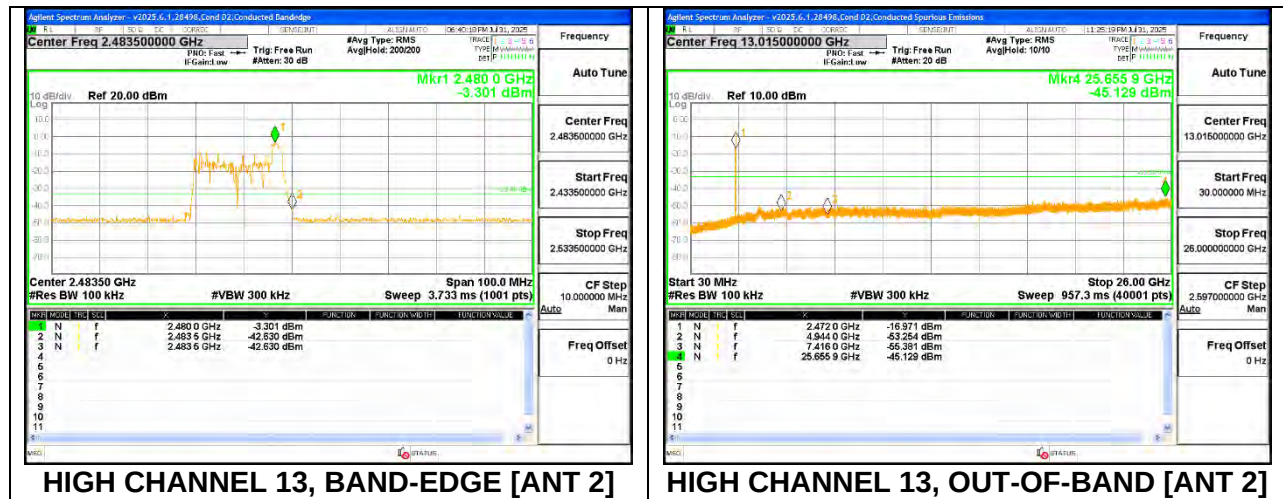

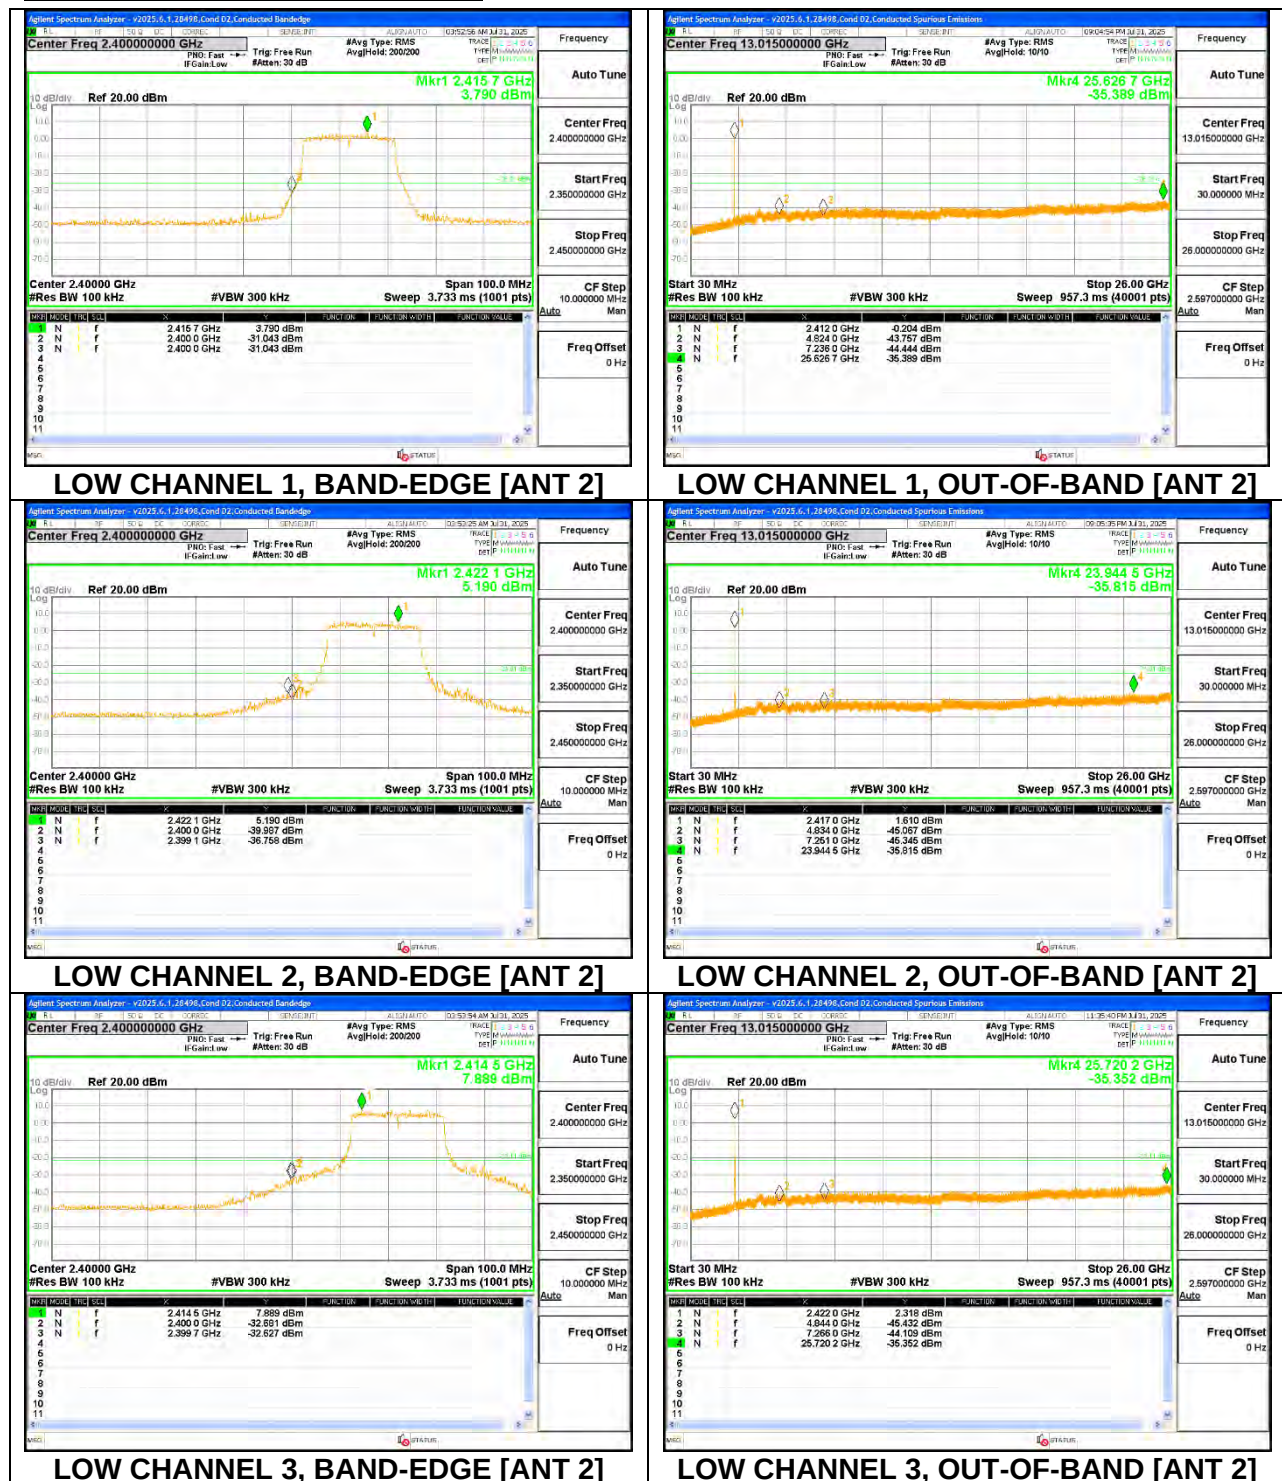
ANT 2 + ANT 1 2TX MODE: SU Mode




IN-BAND REFERENCE LEVEL




MID CHANNEL 6, OUT-OF-BAND

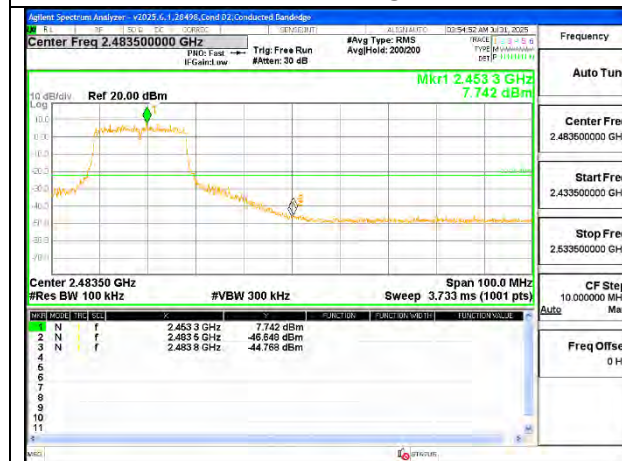

HIGH CHANNEL 9, BAND-EDGE [ANT 2]

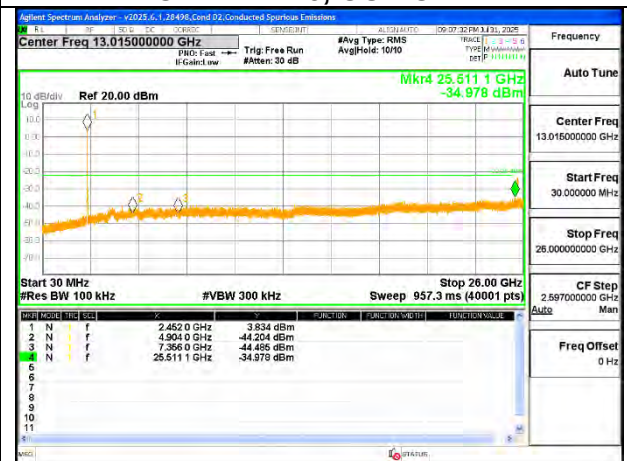


HIGH CHANNEL 9, OUT-OF-BAND [ANT 2]





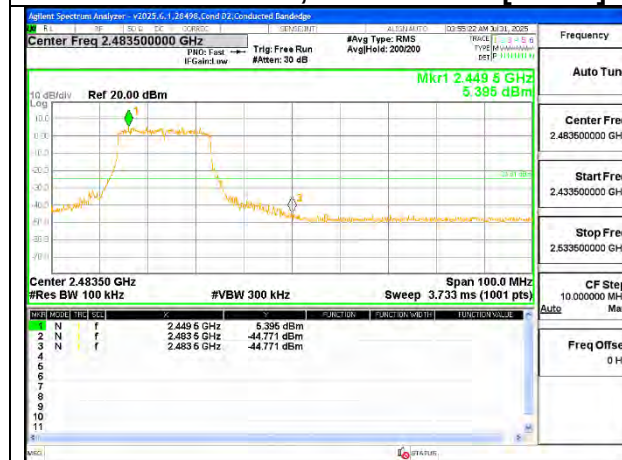



HIGH CHANNEL 10, BAND-EDGE [ANT 2]








HIGH CHANNEL 10, OUT-OF-BAND [ANT 2]

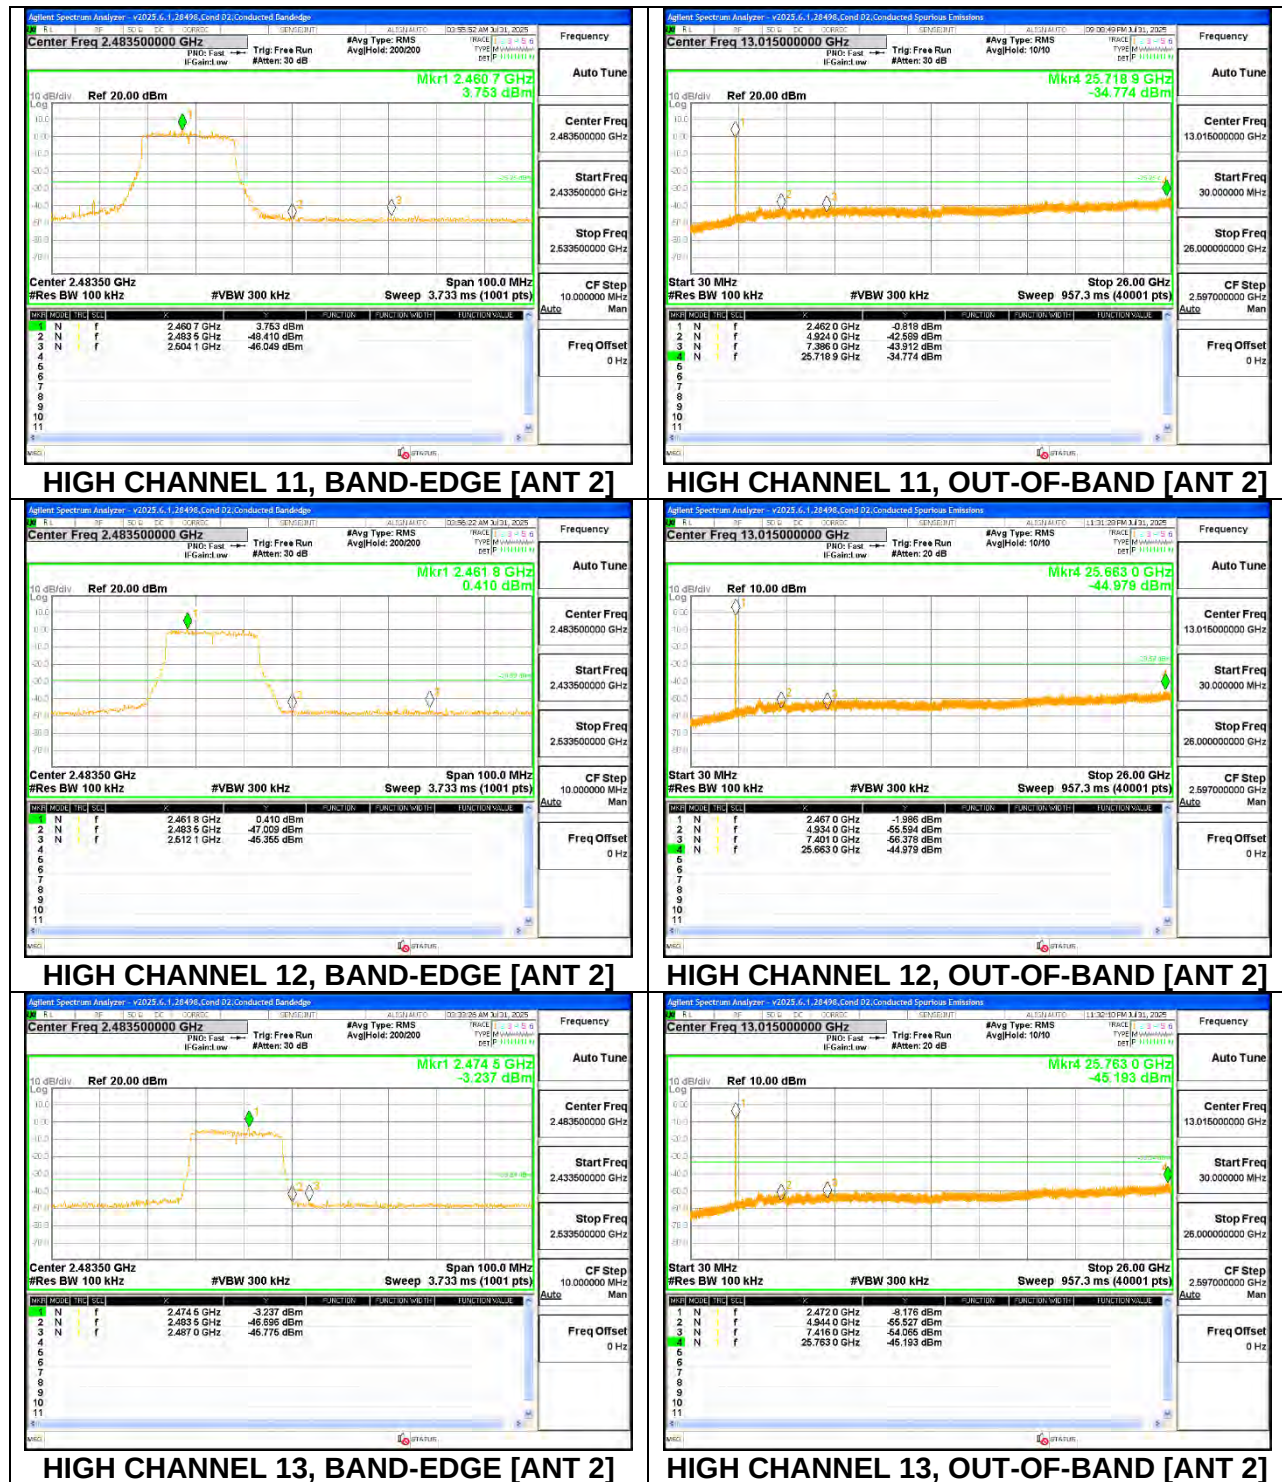


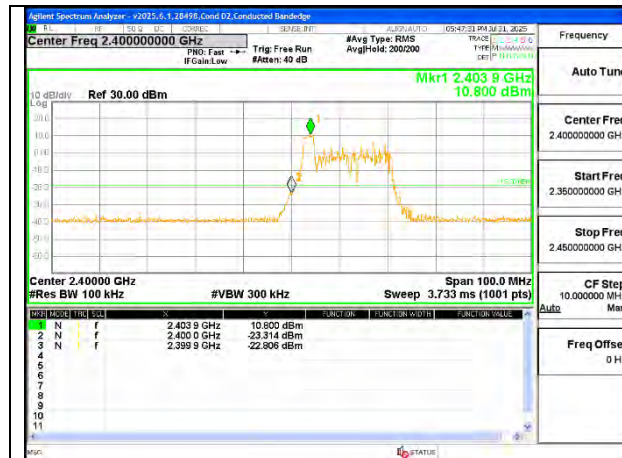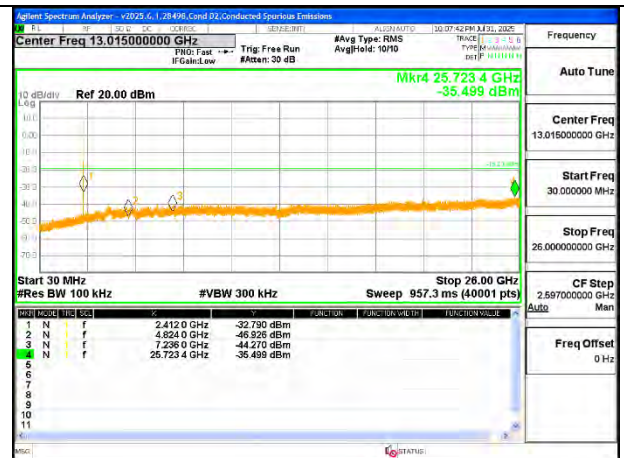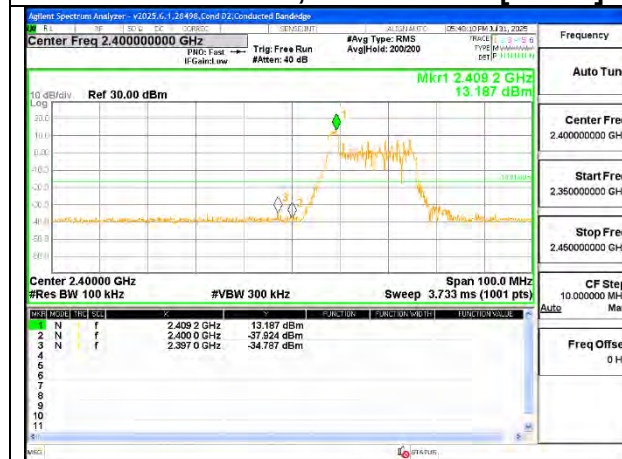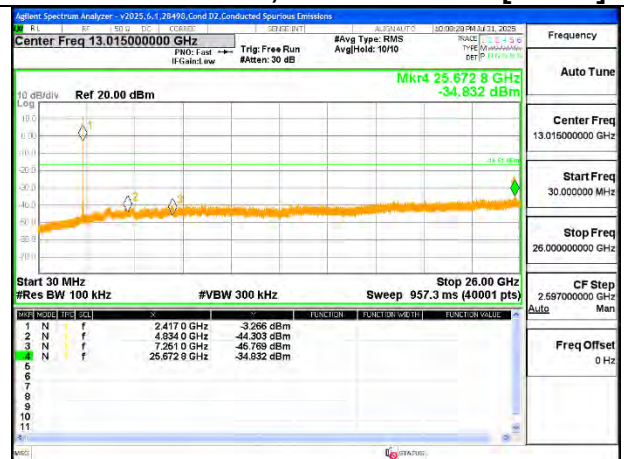
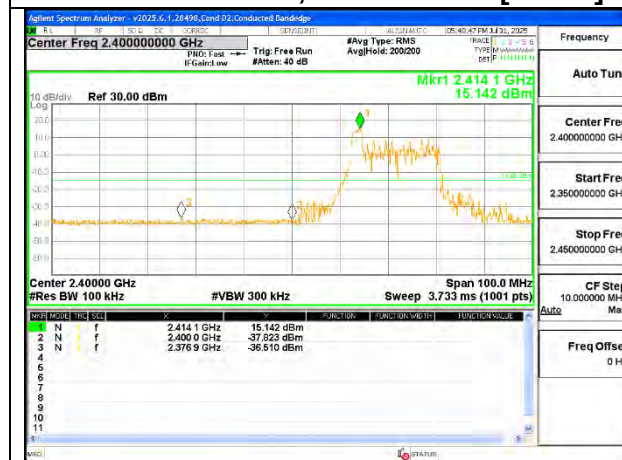
ANT 1: 26-Tone, RU Index 0**LOW CHANNEL 1, BAND-EDGE [ANT 1]****LOW CHANNEL 1, OUT-OF-BAND [ANT 1]****LOW CHANNEL 2, BAND-EDGE [ANT 1]****LOW CHANNEL 2, OUT-OF-BAND [ANT 1]****LOW CHANNEL 3, BAND-EDGE [ANT 1]****LOW CHANNEL 3, OUT-OF-BAND [ANT 1]**

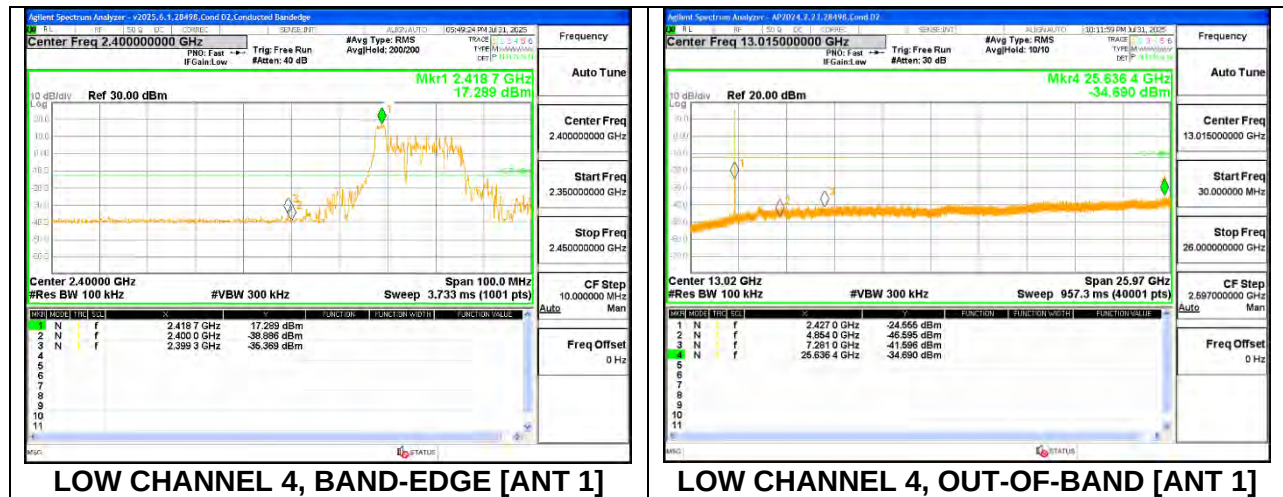


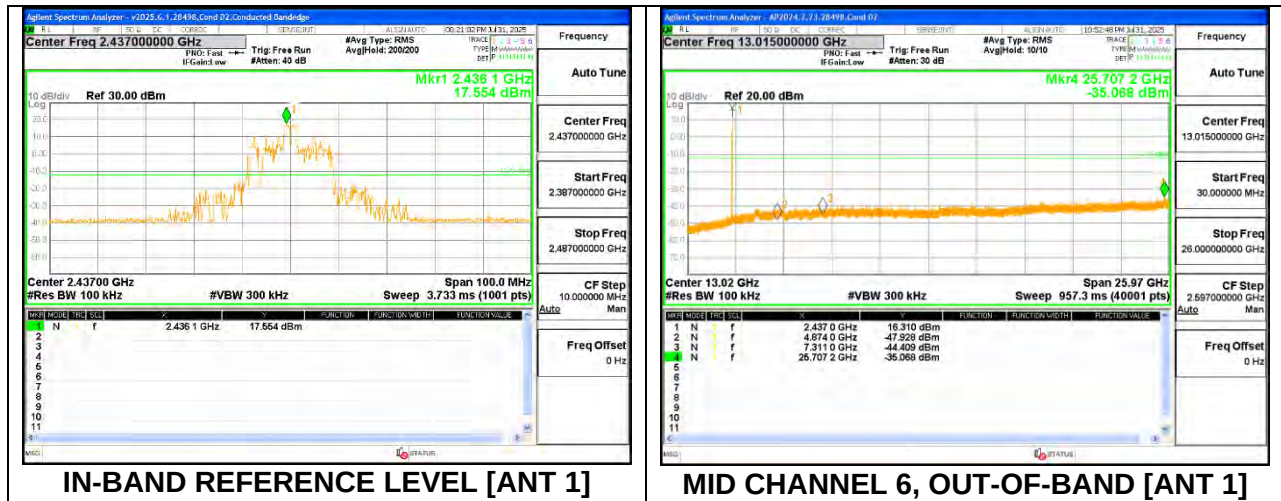
ANT 1: 26-Tone, RU Index 4

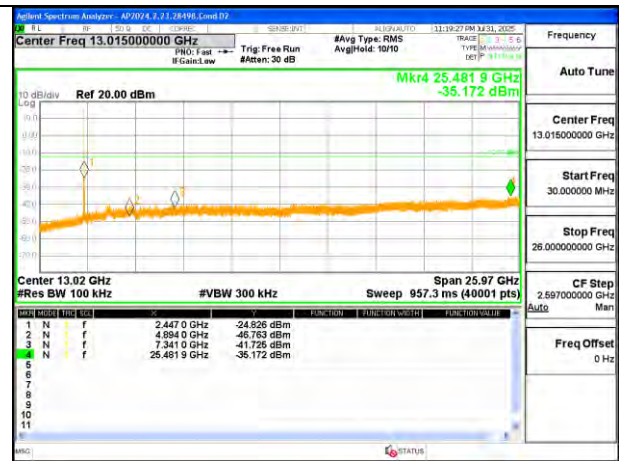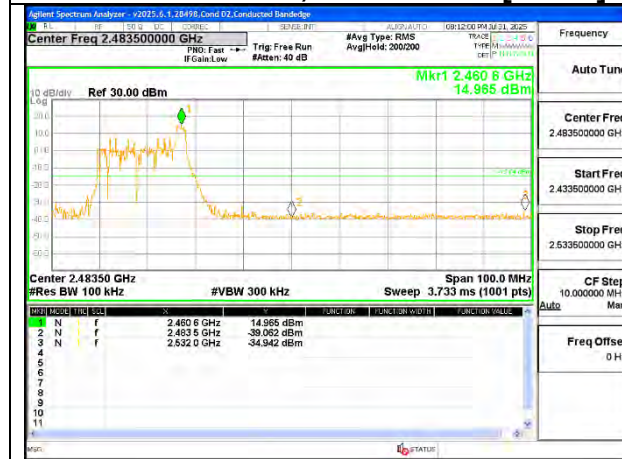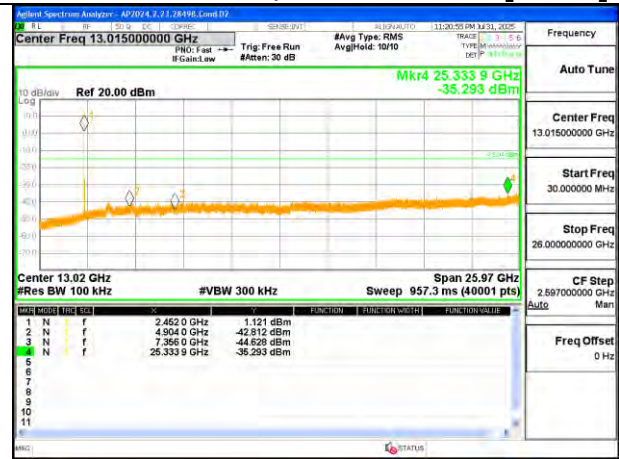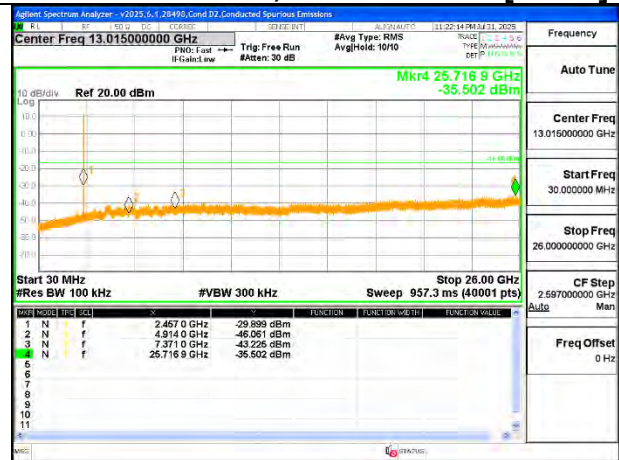ANT 1: 26-Tone, RU Index 8**HIGH CHANNEL 8, BAND-EDGE [ANT 1]****HIGH CHANNEL 8, OUT-OF-BAND [ANT 1]****HIGH CHANNEL 9, BAND-EDGE [ANT 1]****HIGH CHANNEL 9, OUT-OF-BAND [ANT 1]****HIGH CHANNEL 10, BAND-EDGE [ANT 1]****HIGH CHANNEL 10, OUT-OF-BAND [ANT 1]**

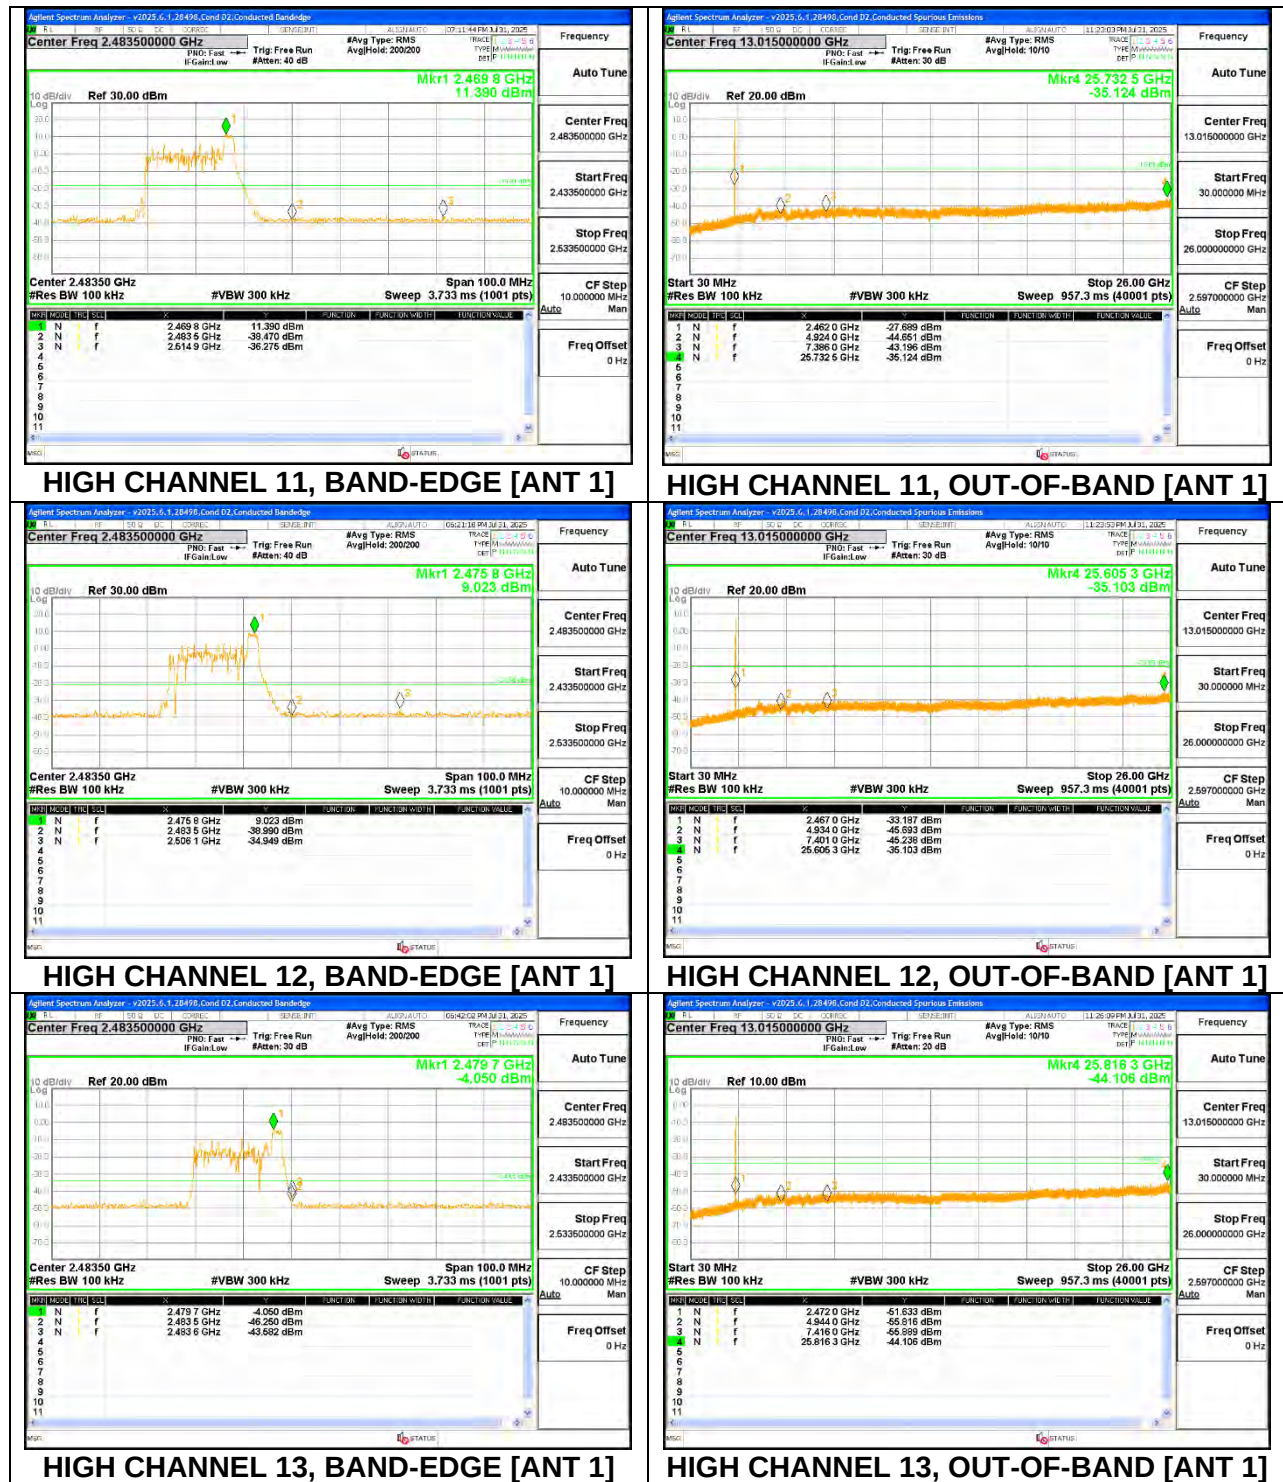


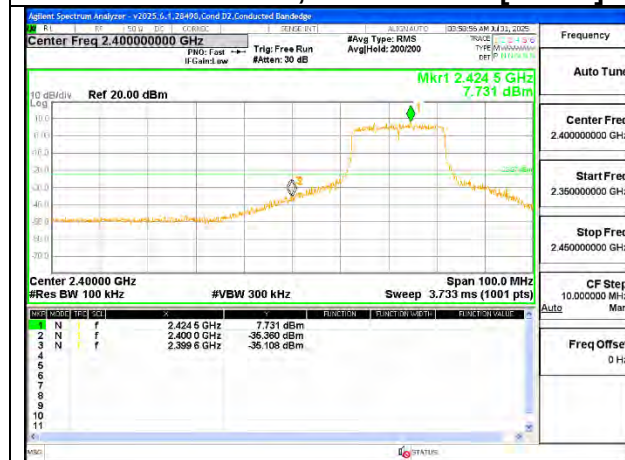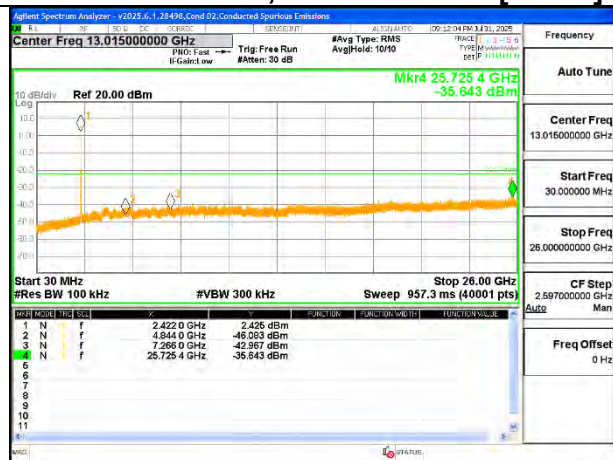ANT 1: SU**LOW CHANNEL 1, BAND-EDGE [ANT 1]****LOW CHANNEL 1, OUT-OF-BAND [ANT 1]****LOW CHANNEL 2, BAND-EDGE [ANT 1]****LOW CHANNEL 2, OUT-OF-BAND [ANT 1]****LOW CHANNEL 3, BAND-EDGE [ANT 1]****LOW CHANNEL 3, OUT-OF-BAND [ANT 1]**

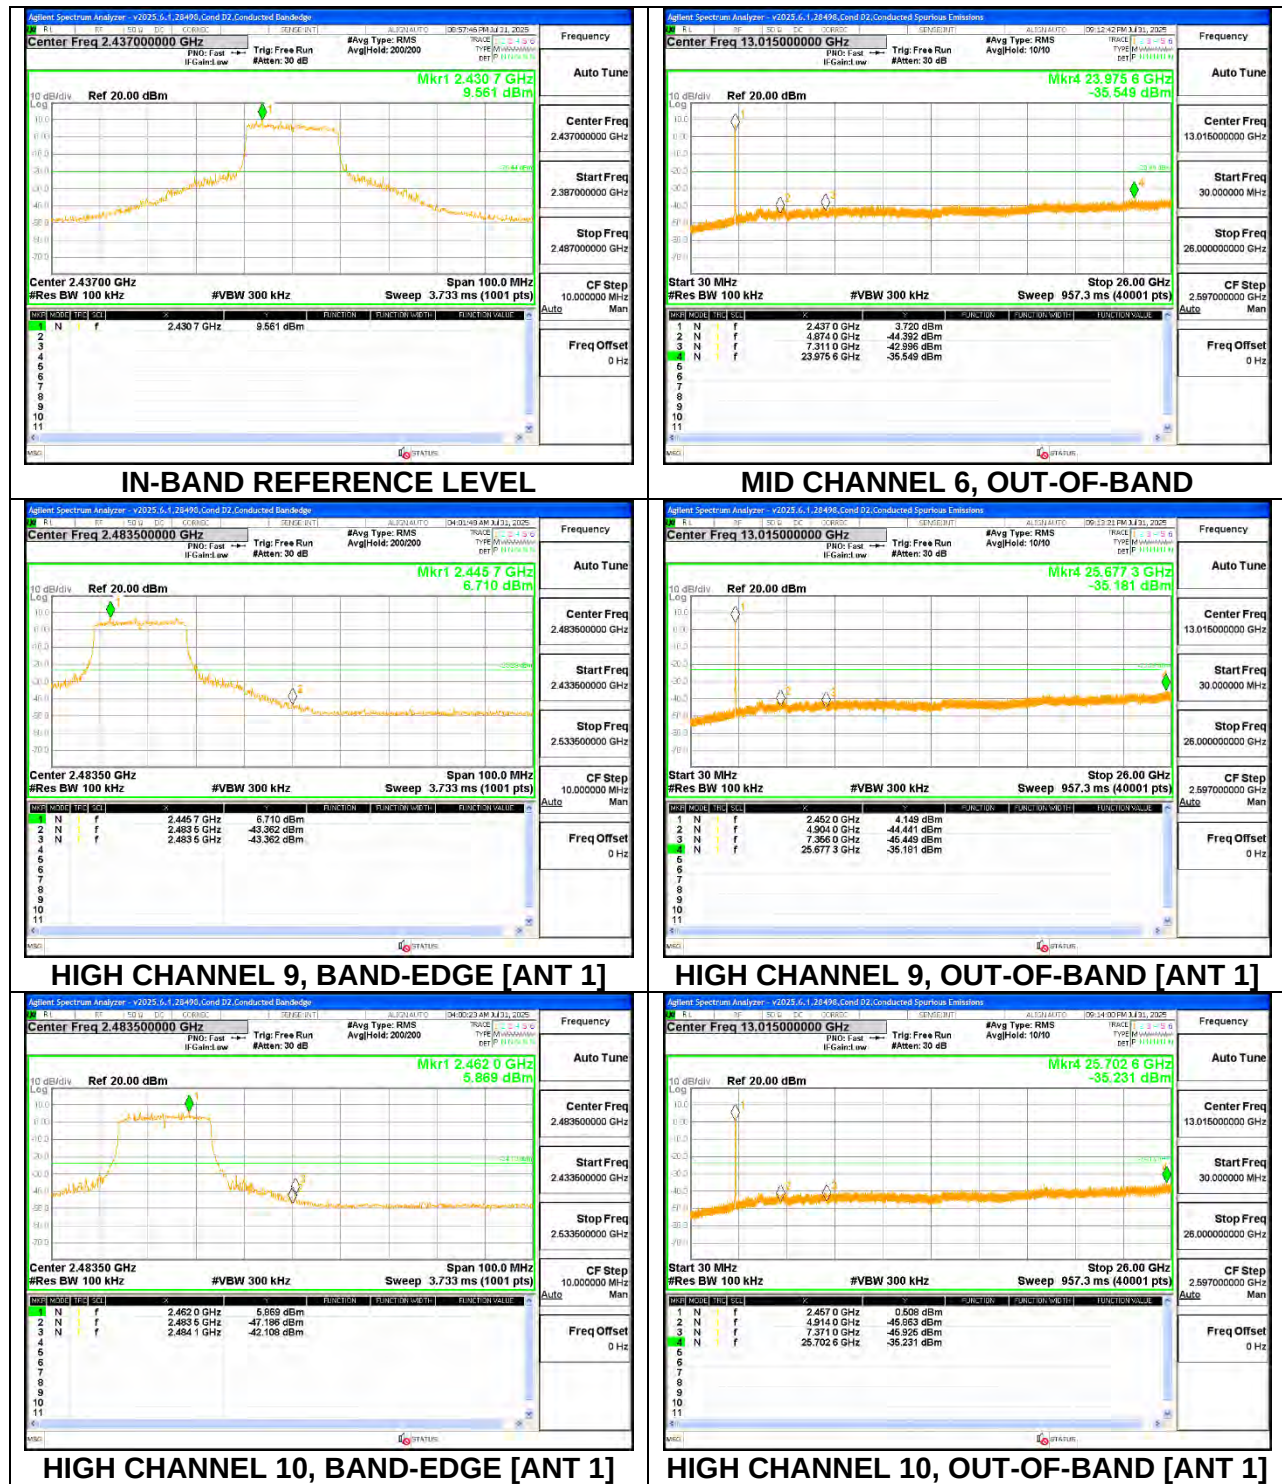

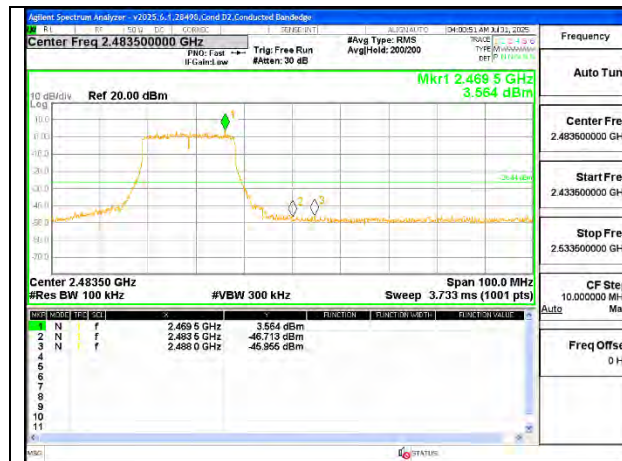


HIGH CHANNEL 11, BAND-EDGE [ANT 1]

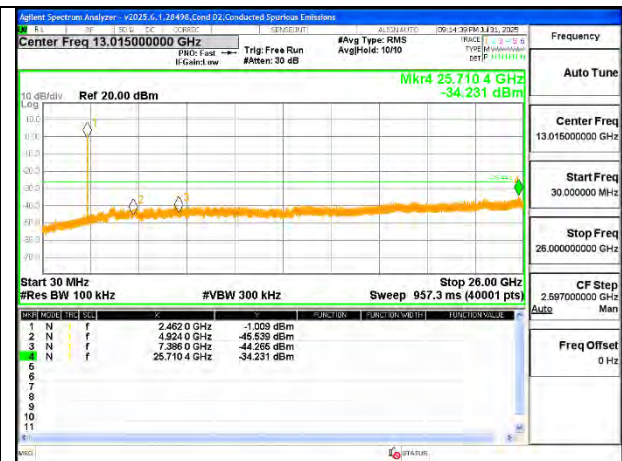

HIGH CHANNEL 11, OUT-OF-BAND [ANT 1]




HIGH CHANNEL 12, BAND-EDGE [ANT 1]

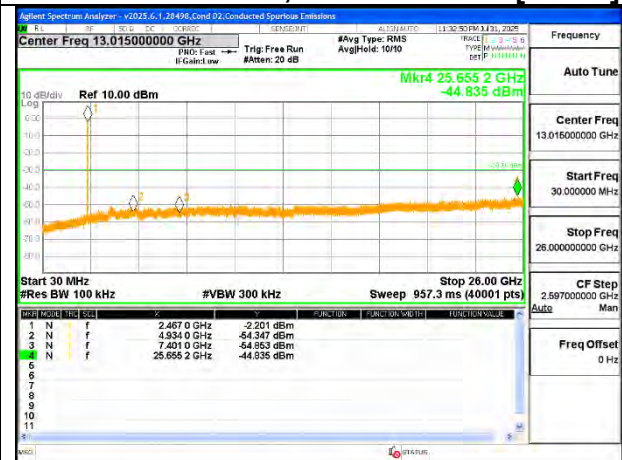

HIGH CHANNEL 12, OUT-OF-BAND [ANT 1]



HIGH CHANNEL 13, BAND-EDGE [ANT 1]

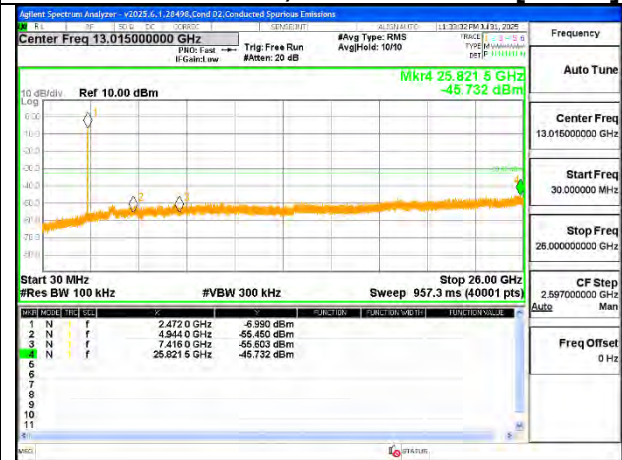

HIGH CHANNEL 13, OUT-OF-BAND [ANT 1]

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209
RSS-GEN, Section 8.9 and 8.10

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1 GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as must 15.209(a) limit.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. 802.11b/n/be SISO MODE – LOW BANDEDGE – CHANNEL 1

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	2	* 2.39	62.5	Pk	32.2	0	-38.6	56.1	-	-	74	-17.9	180	126	H
			* 2.385618	64.68	Pk	32.2	0	-38.5	58.38	-	-	74	-15.62	180	126	H
			* 2.39	52.54	RMS	32.2	0	-38.6	46.14	54	-7.86	-	-	180	126	H
			* 2.386754	53.94	RMS	32.2	0	-38.5	47.64	54	-6.36	-	-	180	126	H
			* 2.39	63.47	Pk	32.2	0	-38.6	57.07	-	-	74	-16.93	212	359	V
			* 2.386856	63.88	Pk	32.2	0	-38.5	57.58	-	-	74	-16.42	212	359	V
		1	* 2.39	51.67	RMS	32.2	0	-38.6	45.46	54	-8.54	-	-	212	359	V
			* 2.386739	53.08	RMS	32.2	0	-38.5	46.97	54	-7.03	-	-	212	359	V
			* 2.39	62.93	Pk	32.2	0	-38.6	56.53	-	-	74	-17.47	350	112	H
			* 2.386419	64.04	Pk	32.2	0	-38.5	57.74	-	-	74	-16.26	350	112	H
			* 2.39	51.12	RMS	32.2	0	-38.6	44.72	54	-9.28	-	-	350	112	H
			* 2.386404	53.22	RMS	32.2	0	-38.5	46.92	54	-7.08	-	-	350	112	H
			* 2.39	61.43	Pk	32.2	0	-38.6	55.03	-	-	74	-18.97	38	359	V
			* 2.388297	63.9	Pk	32.2	0	-38.6	57.5	-	-	74	-16.5	38	359	V
			* 2.39	49.69	RMS	32.2	0	-38.6	43.29	54	-10.71	-	-	38	359	V
			* 2.38722	52.12	RMS	32.2	0	-38.5	45.82	54	-8.18	-	-	38	359	V
HT20	2412	2	* 2.39	72.32	Pk	32.1	0	-39.23	65.19	-	-	74	-8.81	46	249	H
			* 2.38968	75.74	Pk	32.1	0	-39.23	68.61	-	-	74	-5.39	46	249	H
			* 2.39	56.05	RMS	32.1	0	-39.23	48.92	54	-5.08	-	-	46	249	H
			* 2.389738	56.35	RMS	32.1	0	-39.23	49.22	54	-4.78	-	-	46	249	H
			* 2.39	70.62	Pk	32.1	0	-39.23	63.49	-	-	74	-10.51	84	319	V
			* 2.38968	73.7	Pk	32.1	0	-39.23	66.57	-	-	74	-7.43	84	319	V
		1	* 2.39	54.2	RMS	32.1	0	-39.23	47.07	54	-6.93	-	-	84	319	V
			* 2.38984	55.15	RMS	32.1	0	-39.23	48.02	54	-5.98	-	-	84	319	V
			* 2.39	74.51	Pk	32.2	0	-38.6	68.11	-	-	74	-5.89	171	112	H
			* 2.389578	75.15	Pk	32.2	0	-38.6	68.75	-	-	74	-5.25	171	112	H
			* 2.39	54.3	RMS	32.2	0	-38.6	47.9	54	-6.1	-	-	171	112	H
			* 2.389825	55.34	RMS	32.2	0	-38.6	48.94	54	-5.06	-	-	171	112	H
			* 2.39	70.41	Pk	32.2	0	-38.6	64.01	-	-	74	-9.99	214	394	V
			* 2.39	70.43	Pk	32.2	0	-38.6	64.03	-	-	74	-9.97	214	394	V
			* 2.39	51.27	RMS	32.2	0	-38.6	44.87	54	-9.13	-	-	214	394	V
			* 2.389592	52.66	RMS	32.2	0	-38.6	46.26	54	-7.74	-	-	214	394	V
EHT20 (SU Mode)	2412	2	* 2.39	75.2	Pk	32.1	0	-40.3	67	-	-	74	-7	179	152	H
			* 2.389942	76.97	Pk	32.1	0	-40.31	68.76	-	-	74	-5.24	179	152	H
			* 2.39	52.07	RMS	32.1	0	-40.3	43.87	54	-10.13	-	-	179	152	H
			* 2.389796	53.72	RMS	32.1	0	-40.32	45.5	54	-8.5	-	-	179	152	H
			* 2.39	70.26	Pk	32.1	0	-40.3	62.06	-	-	74	-11.94	217	367	V
			* 2.389869	71.83	Pk	32.1	0	-40.31	63.62	-	-	74	-10.38	217	367	V
		1	* 2.39	52	RMS	32.1	0	-40.3	43.8	54	-10.2	-	-	217	367	V
			* 2.389883	52.49	RMS	32.1	0	-40.31	44.28	54	-9.72	-	-	217	367	V
			* 2.39	72.85	Pk	32.1	0	-40.3	64.65	-	-	74	-9.35	336	165	H
			* 2.38984	76.92	Pk	32.1	0	-40.32	68.7	-	-	74	-5.3	336	165	H
			* 2.39	53.88	RMS	32.1	0	-40.3	45.68	54	-8.32	-	-	336	165	H
			* 2.389869	54.95	RMS	32.1	0	-40.31	46.74	54	-7.26	-	-	336	165	H
			* 2.39	60.09	Pk	32.1	0	-40.3	51.89	-	-	74	-22.11	52	270	V
			* 2.350844	63.2	Pk	32	0	-40.22	54.98	-	-	74	-19.02	52	270	V
			* 2.39	49.67	RMS	32.1	0	-40.3	41.47	54	-12.53	-	-	52	270	V
			* 2.373945	50.81	RMS	32.1	0	-40.12	42.79	54	-11.21	-	-	52	270	V
EHT20 (RU 26 / Index 0)	2412	2	* 2.39	75.39	Pk	32.2	0	-38.6	68.99	-	-	74	-5.01	358	129	H
			* 2.39	75.4	Pk	32.2	0	-38.6	69	-	-	74	-5	358	129	H
			* 2.39	50.53	RMS	32.2	0	-38.6	44.13	54	-9.87	-	-	358	129	H
			* 2.389097	52.94	RMS	32.2	0	-38.5	46.64	54	-7.36	-	-	358	129	H
			* 2.39	72.55	Pk	32.2	0	-38.6	66.15	-	-	74	-7.85	22	370	V
			* 2.389709	72.82	Pk	32.2	0	-38.6	66.42	-	-	74	-7.58	22	370	V
		1	* 2.39	49.88	RMS	32.2	0	-38.6	43.67	54	-10.33	-	-	22	370	V
			* 2.389898	52.38	RMS	32.2	0	-38.6	46.17	54	-7.83	-	-	22	370	V
			2.389955	55.74	RMS	32	0	-39.77	47.97	54	-6.03	-	-	316	106	H
			2.39	77.18	Pk	32	0	-39.79	69.39	-	-	74	-4.61	316	106	H
			2.39	77.18	Pk	32	0	-39.79	69.39	-	-	74	-4.61	316	106	H
			2.39	51.29	RMS	32	0	-39.79	43.5	54	-10.5	-	-	316	106	H
			2.389534	73.15	Pk	32	0	-39.78	65.37	-	-	74	-8.63	342	343	V
			2.389767	52.67	RMS	32	0	-39.79	44.88	54	-9.12	-	-	342	343	V
			2.39	72.6	Pk	32	0	-39.79	64.81	-	-	74	-9.19	342	343	V
			2.39	51.08	RMS	32	0	-39.79	43.29	54	-10.71	-	-	342	343	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 2: 802.11b Mode BANDEDGE (LOW CHANNEL / 2412MHz)

HORIZONTAL RESULT

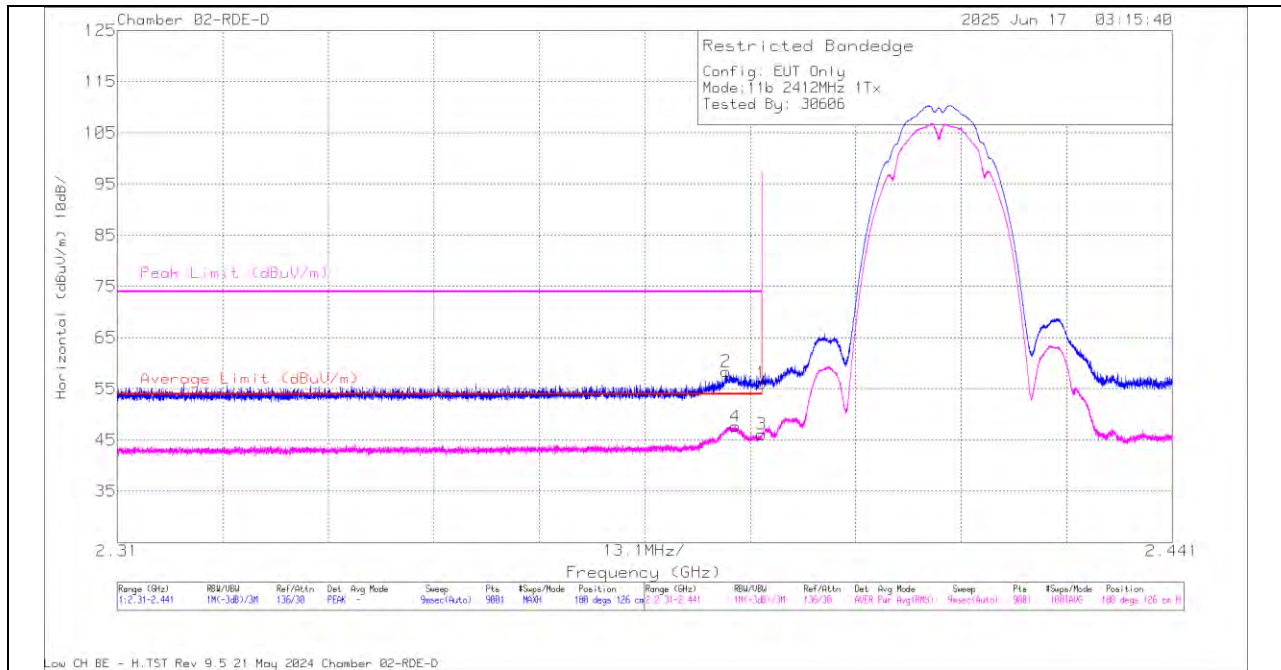


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	62.5	Pk	32.2	-38.6	0	56.1	-	-	74	-17.9	180	126	H
2	* 2.385618	64.68	Pk	32.2	-38.5	0	58.38	-	-	74	-15.62	180	126	H
3	* 2.39	52.54	RMS	32.2	-38.6	0	46.14	54	-7.86	-	-	180	126	H
4	* 2.386754	53.94	RMS	32.2	-38.5	0	47.64	54	-6.36	-	-	180	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

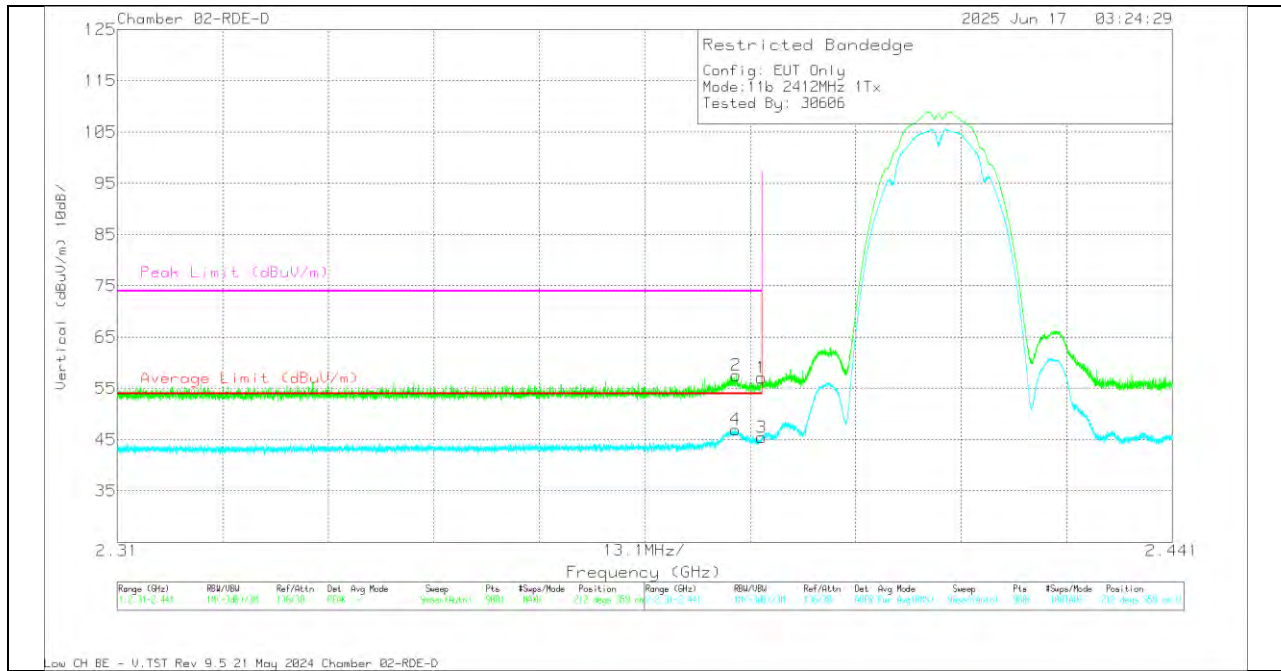VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cdb/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	63.47	PK	32.2	-38.6	0	57.07	-	-	74	-16.93	212	359	V
2	* 2.386856	63.88	PK	32.2	-38.5	0	57.58	-	-	74	-16.42	212	359	V
3	* 2.39	51.67	RMS	32.2	-38.6	0	45.46	54	-8.54	-	-	212	359	V
4	* 2.386739	53.08	RMS	32.2	-38.5	0	46.97	54	-7.03	-	-	212	359	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

1TX Antenna 1: 802.11be EHT20 SU Mode **BANDEDGE (LOW CHANNEL / 2412MHz)**

HORIZONTAL RESULT

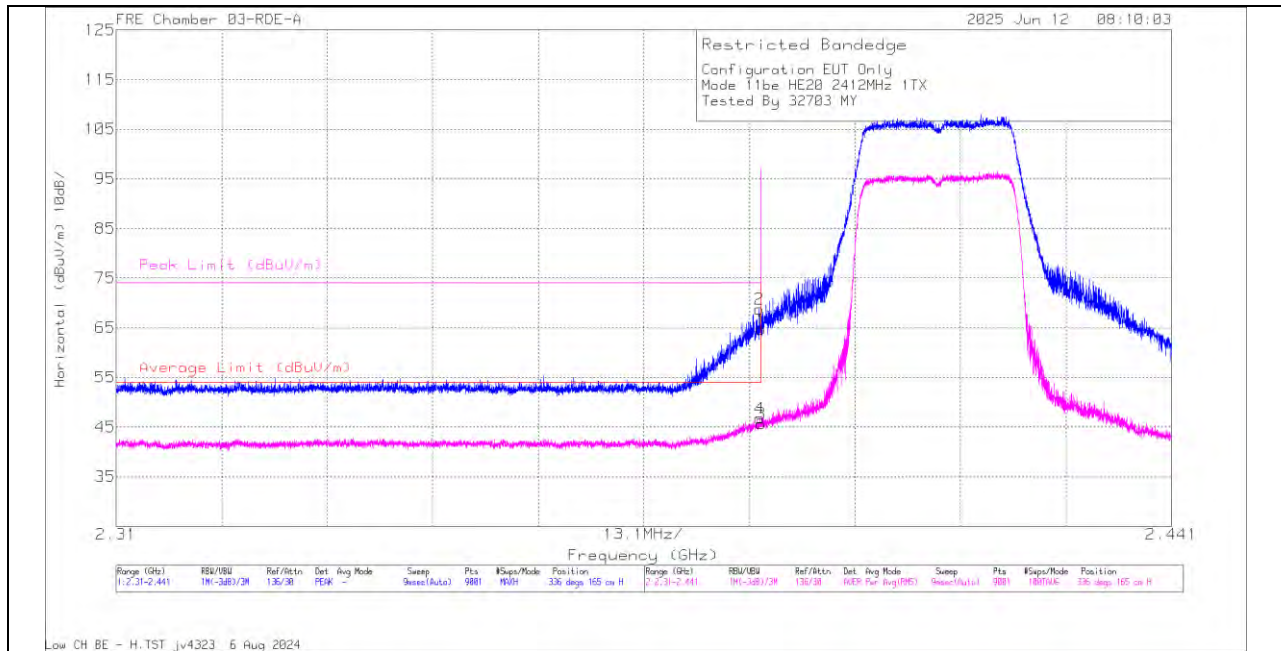


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	72.85	PK	32.1	0	-40.3	64.65	-	-	74	-9.35	336	165	H
2	* 2.38984	76.92	PK	32.1	0	-40.32	68.7	-	-	74	-5.3	336	165	H
3	* 2.39	53.88	RMS	32.1	0	-40.3	45.68	54	-8.32	-	-	336	165	H
4	* 2.389869	54.95	RMS	32.1	0	-40.31	46.74	54	-7.26	-	-	336	165	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

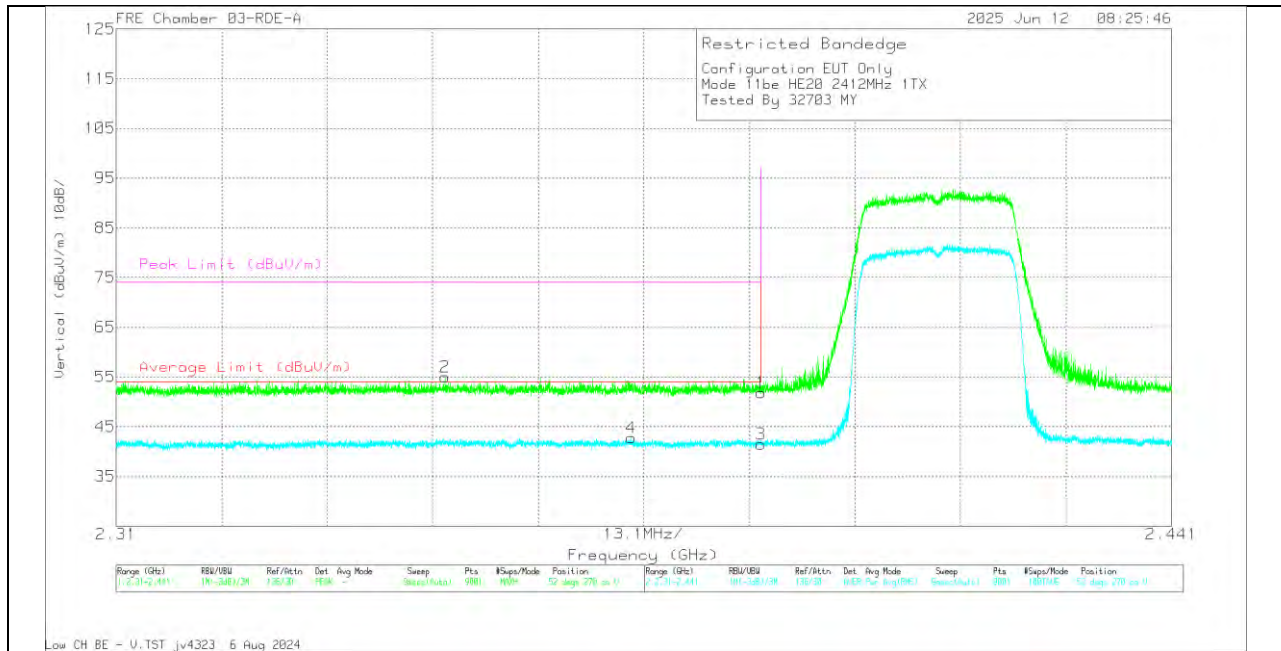VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.09	PK	32.1	0	-40.3	51.89	-	-	74	-22.11	52	270	V
2	* 2.350844	63.2	PK	32	0	-40.22	54.98	-	-	74	-19.02	52	270	V
3	* 2.39	49.67	RMS	32.1	0	-40.3	41.47	54	-12.53	-	-	52	270	V
4	* 2.373945	50.81	RMS	32.1	0	-40.12	42.79	54	-11.21	-	-	52	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

10.1.2. 802.11b/n/be SISO MODE – LOW BANDEDGE – CHANNEL 2

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2417	2	* 2.39	62.46	Pk	32.2	0	-38.6	56.06	-	-	74	-17.94	175	129	H
			* 2.389287	63.88	Pk	32.2	0	-38.5	57.58	-	-	74	-16.42	175	129	H
			* 2.39	52.76	RMS	32.2	0	-38.6	46.36	54	-7.64	-	-	175	129	H
			* 2.388311	53.38	RMS	32.2	0	-38.6	46.98	54	-7.02	-	-	175	129	H
			* 2.39	60.88	Pk	32.2	0	-38.6	54.48	-	-	74	-19.52	42	353	V
			* 2.311063	63.17	Pk	31.9	0	-38.7	56.37	-	-	74	-17.63	42	353	V
			* 2.39	49.63	RMS	32.2	0	-38.6	43.42	54	-10.58	-	-	42	353	V
			* 2.367292	51.11	RMS	32.1	0	-38.6	44.8	54	-9.2	-	-	42	353	V
		1	* 2.39	62.43	Pk	32.2	0	-38.6	56.03	-	-	74	-17.97	349	113	H
			* 2.389403	63.84	Pk	32.2	0	-38.5	57.54	-	-	74	-16.46	349	113	H
			* 2.39	52.38	RMS	32.2	0	-38.6	45.98	54	-8.02	-	-	349	113	H
			* 2.389971	52.81	RMS	32.2	0	-38.6	46.41	54	-7.59	-	-	349	113	H
			* 2.39	62.6	Pk	32.2	0	-38.6	56.2	-	-	74	-17.8	33	360	V
			* 2.388137	63.13	Pk	32.2	0	-38.6	56.73	-	-	74	-17.27	33	360	V
			* 2.39	50.89	RMS	32.2	0	-38.6	44.49	54	-9.51	-	-	33	360	V
			* 2.388966	52.11	RMS	32.2	0	-38.5	45.81	54	-8.19	-	-	33	360	V
HT20	2417	2	* 2.39	72.72	Pk	32.2	0	-38.6	66.32	-	-	74	-7.68	2	110	H
			* 2.389942	75.04	Pk	32.2	0	-38.6	68.64	-	-	74	-5.36	2	110	H
			* 2.39	55	RMS	32.2	0	-38.6	48.6	54	-5.4	-	-	2	110	H
			* 2.389985	56.25	RMS	32.2	0	-38.6	49.85	54	-4.15	-	-	2	110	H
			* 2.39	70.65	Pk	32.2	0	-38.6	64.25	-	-	74	-9.75	39	360	V
			* 2.389811	70.79	Pk	32.2	0	-38.6	64.39	-	-	74	-9.61	39	360	V
			* 2.39	52.6	RMS	32.2	0	-38.6	46.2	54	-7.8	-	-	39	360	V
			* 2.388806	53.67	RMS	32.2	0	-38.5	47.37	54	-6.63	-	-	39	360	V
		1	* 2.39	73.08	Pk	32.2	0	-38.6	66.68	-	-	74	-7.32	172	128	H
			* 2.389971	73.81	Pk	32.2	0	-38.6	67.41	-	-	74	-6.59	172	128	H
			* 2.39	56.61	RMS	32.2	0	-38.6	50.21	54	-3.79	-	-	172	128	H
			* 2.389709	57.07	RMS	32.2	0	-38.6	50.67	54	-3.33	-	-	172	128	H
			* 2.39	69.7	Pk	32.2	0	-38.6	63.3	-	-	74	-10.7	210	400	V
			* 2.38949	70.17	Pk	32.2	0	-38.5	63.87	-	-	74	-10.13	210	400	V
			* 2.39	54.7	RMS	32.2	0	-38.6	48.3	54	-5.7	-	-	210	400	V
			* 2.39	54.72	RMS	32.2	0	-38.6	48.32	54	-5.68	-	-	210	400	V
EHT20 (SU Mode)	2417	2	* 2.39	76.06	Pk	32.1	0	-40.3	67.86	-	-	74	-6.14	182	196	H
			* 2.389578	77.16	Pk	32.1	0	-40.34	68.92	-	-	74	-5.08	182	196	H
			* 2.39	56.6	RMS	32.1	0	-40.3	48.4	54	-5.6	-	-	182	196	H
			* 2.389738	58.92	RMS	32.1	0	-40.33	50.69	54	-3.31	-	-	182	196	H
			* 2.39	74.73	Pk	32.1	0	-40.3	66.53	-	-	74	-7.47	220	352	V
			* 2.389912	76.12	Pk	32.1	0	-40.31	67.91	-	-	74	-6.09	220	352	V
			* 2.39	55.8	RMS	32.1	0	-40.3	47.6	54	-6.4	-	-	220	352	V
			* 2.389927	56.63	RMS	32.1	0	-40.31	48.42	54	-5.58	-	-	220	352	V
		1	* 2.39	72.92	Pk	32.1	0	-40.3	64.72	-	-	74	-9.28	344	206	H
			* 2.389243	76.86	Pk	32.1	0	-40.38	68.58	-	-	74	-5.42	344	206	H
			* 2.39	56.81	RMS	32.1	0	-40.3	48.61	54	-5.39	-	-	344	206	H
			* 2.389956	58.46	RMS	32.1	0	-40.3	50.26	54	-3.74	-	-	344	206	H
			* 2.39	70.75	Pk	32.1	0	-40.3	62.55	-	-	74	-11.45	44	349	V
			* 2.389956	71.67	Pk	32.1	0	-40.3	63.47	-	-	74	-10.53	44	349	V
			* 2.39	55.21	RMS	32.1	0	-40.3	47.01	54	-6.99	-	-	44	349	V
			* 2.389985	55.32	RMS	32.1	0	-40.3	47.12	54	-6.88	-	-	44	349	V
EHT20 (RU 26 / Index 0)	2417	2	2.388413	53.74	RMS	32	0	-39.76	45.98	54	-8.02	-	-	138	295	H
			2.389898	72.64	Pk	32	0	-39.79	64.85	-	-	74	-9.15	138	295	H
			2.39	72.39	Pk	32	0	-39.79	64.6	-	-	74	-9.4	138	295	H
			2.39	51.86	RMS	32	0	-39.79	44.07	54	-9.93	-	-	138	295	H
			2.389112	71.78	Pk	32	0	-39.77	64.01	-	-	74	-9.99	174	320	V
			2.389985	52.88	RMS	32	0	-39.79	45.09	54	-8.91	-	-	174	320	V
			2.39	71.68	Pk	32	0	-39.79	63.89	-	-	74	-10.11	174	320	V
			2.39	50.78	RMS	32	0	-39.79	42.99	54	-11.01	-	-	174	320	V
		1	2.389592	53.48	RMS	32	0	-39.78	45.7	54	-8.3	-	-	320	109	H
			2.389942	73.55	Pk	32	0	-39.79	65.76	-	-	74	-8.24	320	109	H
			2.39	73.37	Pk	32	0	-39.79	65.58	-	-	74	-8.42	320	109	H
			2.39	51.79	RMS	32	0	-39.79	44	54	-10	-	-	320	109	H
			2.384614	51.68	RMS	32	0	-39.73	43.95	54	-10.05	-	-	345	260	V
			2.389447	66.13	Pk	32	0	-39.78	58.35	-	-	74	-15.65	345	260	V
			2.39	65.22	Pk	32	0	-39.79	57.43	-	-	74	-16.57	345	260	V
			2.39	50.99	RMS	32	0	-39.79	43.2	54	-10.8	-	-	345	260	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 2: 802.11b Mode BANDEDGE (LOW CHANNEL / 2417MHz)

HORIZONTAL RESULT

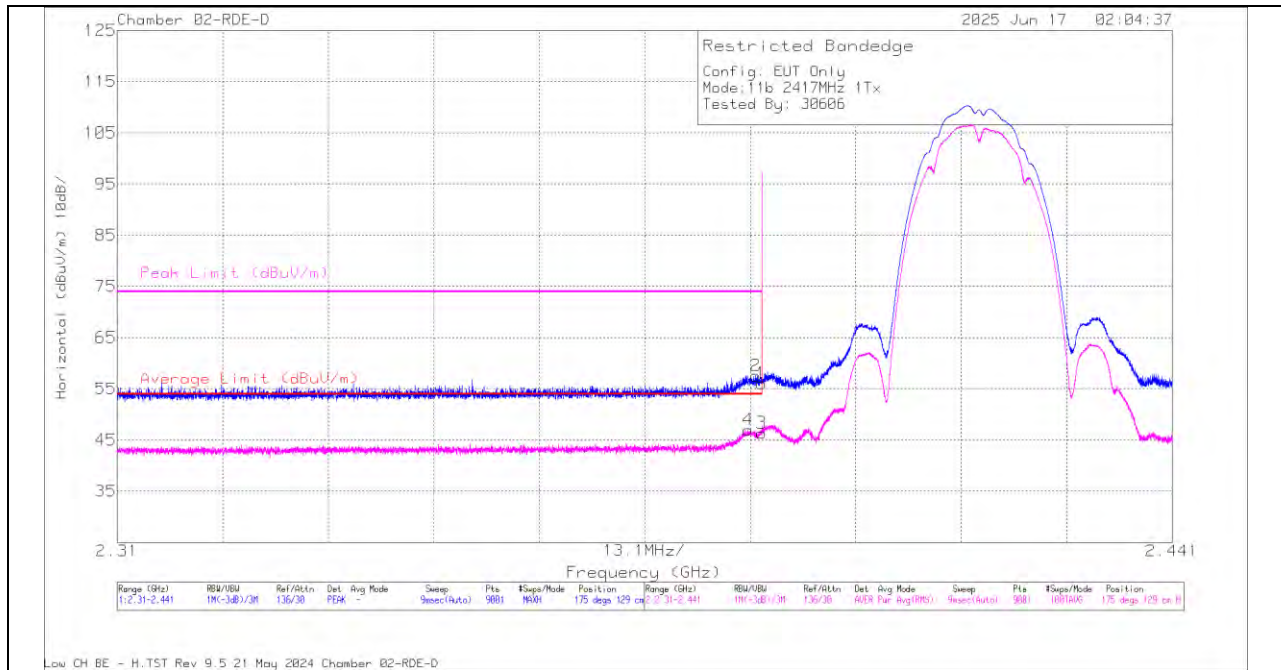


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCFF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	62.46	Pk	32.2	-38.6	0	56.06	-	-	74	-17.94	175	129	H
2	* 2.388287	63.88	Pk	32.2	-38.5	0	57.58	-	-	74	-16.42	175	129	H
3	* 2.39	52.76	RMS	32.2	-38.6	0	46.36	54	-7.64	-	-	175	129	H
4	* 2.388311	53.38	RMS	32.2	-38.6	0	46.98	54	-7.02	-	-	175	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

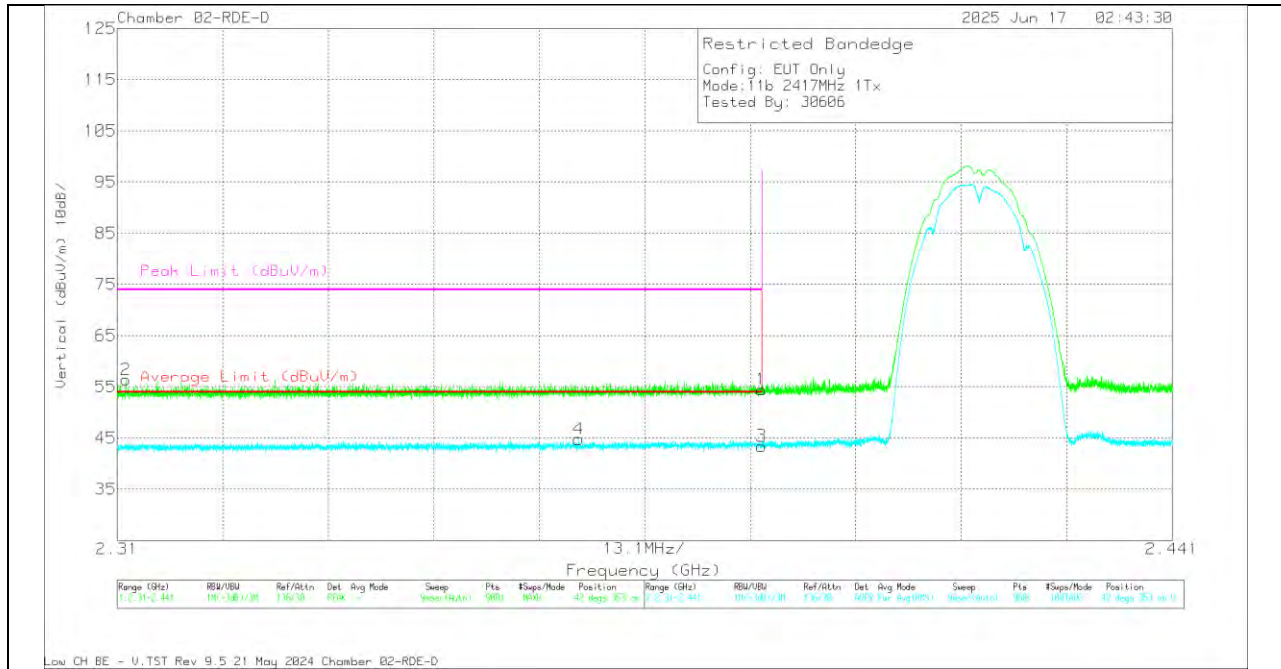VERTICALRESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	60.88	Pk	32.2	-38.6	0	54.48	-	-	74	-19.52	42	353	V
2	* 2.311063	63.17	Pk	31.9	-38.7	0	56.37	-	-	74	-17.63	42	353	V
3	* 2.39	49.63	RMS	32.2	-38.6	0	43.42	54	-10.58	-	-	42	353	V
4	* 2.367292	51.11	RMS	32.1	-38.6	0	44.8	54	-9.2	-	-	42	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 1: 802.11be EHT20 SU Mode **BANDEDGE (LOW CHANNEL / 2417MHz)**

HORIZONTAL RESULT

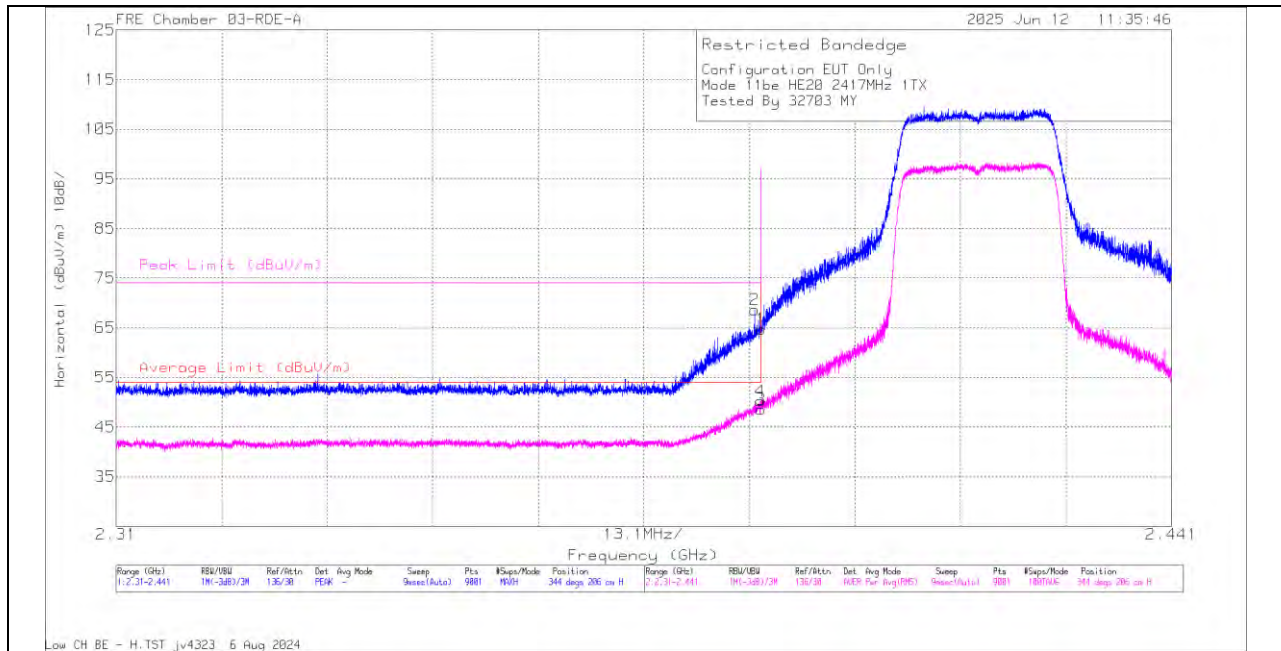


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	72.92	PK	32.1	0	-40.3	64.72	-	-	74	-9.28	344	206	H
2	* 2.389243	76.86	PK	32.1	0	-40.38	68.58	-	-	74	-5.42	344	206	H
3	* 2.39	56.81	RMS	32.1	0	-40.3	48.61	54	-5.39	-	-	344	206	H
4	* 2.389956	58.46	RMS	32.1	0	-40.3	50.26	54	-3.74	-	-	344	206	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

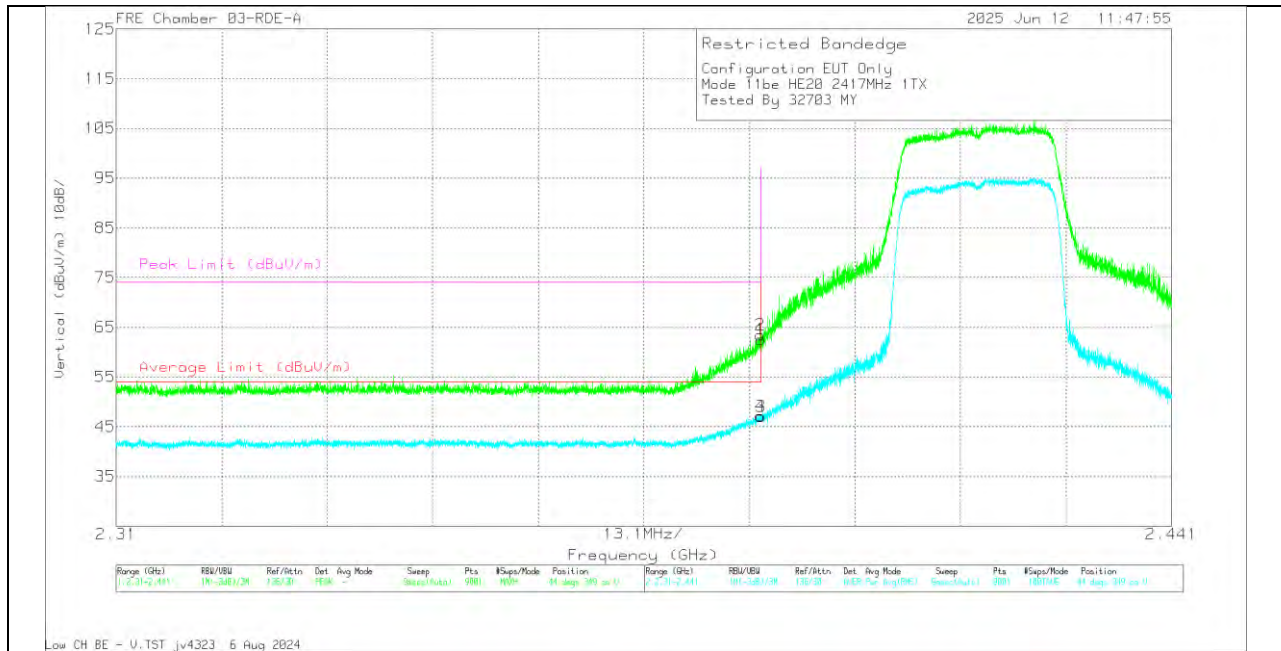VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	70.75	PK	32.1	0	-40.3	62.55	-	-	74	-11.45	44	349	V
2	* 2.389956	71.67	PK	32.1	0	-40.3	63.47	-	-	74	-10.53	44	349	V
3	* 2.39	55.21	RMS	32.1	0	-40.3	47.01	54	-6.99	-	-	44	349	V
4	* 2.389985	55.32	RMS	32.1	0	-40.3	47.12	54	-6.88	-	-	44	349	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

10.1.3. 802.11b/n/be SISO MODE – HIGH BANDEDGE – CHANNEL 11

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2462	2	* 2.4835	62.8	Pk	32.2	0	-38.3	56.7	-	-	74	-17.3	179	167	H
			* 2.484013	64.46	Pk	32.2	0	-38.3	58.36	-	-	74	-15.64	179	167	H
			* 2.4835	51.87	RMS	32.2	0	-38.3	45.77	54	-8.23	-	-	179	167	H
			* 2.483823	52.15	RMS	32.2	0	-38.3	46.05	54	-7.95	-	-	179	167	H
			* 2.4835	61.66	Pk	32.2	0	-38.3	55.56	-	-	74	-18.44	21	385	V
			* 2.497	63.34	Pk	32.2	0	-38.2	57.34	-	-	74	-16.66	21	385	V
		1	* 2.4835	49.95	RMS	32.2	0	-38.3	43.85	54	-10.15	-	-	21	385	V
			2.559222	50.6	RMS	32.4	0	-38	45	54	-9	-	-	21	385	V
			* 2.4835	61.5	Pk	32.2	0	-38.3	55.4	-	-	74	-18.6	341	125	H
			* 2.48484	63.4	Pk	32.2	0	-38.3	57.3	-	-	74	-16.7	341	125	H
			* 2.4835	51.3	RMS	32.2	0	-38.3	45.2	54	-8.8	-	-	341	125	H
			* 2.483756	52.04	RMS	32.2	0	-38.3	45.94	54	-8.06	-	-	341	125	H
			* 2.4835	62.68	Pk	32.2	0	-38.3	56.58	-	-	74	-17.42	22	388	V
			2.531785	63.03	Pk	32.3	0	-38.2	57.13	-	-	74	-16.87	22	388	V
			* 2.4835	50.91	RMS	32.2	0	-38.3	44.81	54	-9.19	-	-	22	388	V
			* 2.485043	51.5	RMS	32.2	0	-38.3	45.4	54	-8.6	-	-	22	388	V
HT20	2462	2	* 2.4835	73.26	Pk	32.2	0	-38.3	67.16	-	-	74	-6.84	179	170	H
			* 2.483634	75.15	Pk	32.2	0	-38.3	69.05	-	-	74	-4.95	179	170	H
			* 2.4835	56.1	RMS	32.2	0	-38.3	50	54	-4	-	-	179	170	H
			* 2.484406	55.72	RMS	32.2	0	-38.3	49.62	54	-4.38	-	-	179	170	H
			* 2.4835	65.42	Pk	32.2	0	-38.3	59.32	-	-	74	-14.68	3	344	V
			* 2.484189	66.12	Pk	32.2	0	-38.3	60.02	-	-	74	-13.98	3	344	V
			* 2.4835	50.74	RMS	32.2	0	-38.3	44.64	54	-9.36	-	-	3	344	V
			* 2.483973	51.16	RMS	32.2	0	-38.3	45.06	54	-8.94	-	-	3	344	V
		1	* 2.4835	74.86	Pk	32.2	0	-38.3	68.76	-	-	74	-5.24	172	163	H
			* 2.483607	75.26	Pk	32.2	0	-38.3	69.16	-	-	74	-4.84	172	163	H
			* 2.4835	54.09	RMS	32.2	0	-38.3	47.99	54	-6.01	-	-	172	163	H
			* 2.483756	54.92	RMS	32.2	0	-38.3	48.82	54	-5.18	-	-	172	163	H
			* 2.4835	73.21	Pk	32.2	0	-38.3	67.11	-	-	74	-6.89	209	382	V
			* 2.483647	73.63	Pk	32.2	0	-38.3	67.53	-	-	74	-6.47	209	382	V
			* 2.4835	51.47	RMS	32.2	0	-38.3	45.37	54	-8.63	-	-	209	382	V
			* 2.484447	53.17	RMS	32.2	0	-38.3	47.07	54	-6.93	-	-	209	382	V
EHT20 (SU Mode)	2462	2	* 2.4835	76.39	Pk	32.2	0	-40.1	68.49	-	-	74	-5.51	194	239	H
			* 2.484393	77.12	Pk	32.2	0	-40.1	69.22	-	-	74	-4.78	194	239	H
			* 2.4835	54.87	RMS	32.2	0	-40.1	46.97	54	-7.03	-	-	194	239	H
			* 2.483661	56.24	RMS	32.2	0	-40.1	48.34	54	-5.66	-	-	194	239	H
			* 2.4835	65.42	Pk	32.2	0	-40.1	57.52	-	-	74	-16.48	343	195	V
			* 2.483878	67.15	Pk	32.2	0	-40.1	59.25	-	-	74	-14.75	343	195	V
			* 2.4835	50.42	RMS	32.2	0	-40.1	42.52	54	-11.48	-	-	343	195	V
			* 2.495061	50.76	RMS	32.3	0	-39.62	43.44	54	-10.56	-	-	343	195	V
		1	* 2.4835	71.16	Pk	32.2	0	-38.3	65.06	-	-	74	-8.94	348	123	H
			* 2.48362	74.93	Pk	32.2	0	-38.3	68.83	-	-	74	-5.17	348	123	H
			* 2.4835	52.55	RMS	32.2	0	-38.3	46.45	54	-7.55	-	-	348	123	H
			* 2.483566	54.03	RMS	32.2	0	-38.3	47.93	54	-6.07	-	-	348	123	H
			* 2.4835	69.42	Pk	32.2	0	-38.3	63.32	-	-	74	-10.68	26	392	V
			* 2.483851	73.31	Pk	32.2	0	-38.3	67.21	-	-	74	-6.79	26	392	V
			* 2.4835	51.1	RMS	32.2	0	-38.3	45	54	-9	-	-	26	392	V
			* 2.484176	52.28	RMS	32.2	0	-38.3	46.18	54	-7.82	-	-	26	392	V
EHT20 (RU 26 / Index 8)	2462	2	2.4835	72.56	Pk	32.2	0	-39.76	65	-	-	74	-9	102	263	H
			2.4835	52.18	RMS	32.2	0	-39.76	44.62	54	-9.38	-	-	102	263	H
			2.483539	52.53	RMS	32.2	0	-39.75	44.98	54	-9.02	-	-	102	263	H
			2.484854	73.65	Pk	32.2	0	-39.75	66.1	-	-	74	-7.9	102	263	H
			2.4835	75.31	Pk	32.2	0	-39.76	67.75	-	-	74	-6.25	176	382	V
			2.4835	51.07	RMS	32.2	0	-39.76	43.51	54	-10.49	-	-	176	382	V
			2.483796	54.37	RMS	32.2	0	-39.75	46.82	54	-7.18	-	-	176	382	V
			2.484786	76.31	Pk	32.2	0	-39.75	68.76	-	-	74	-5.24	176	382	V
		1	2.4835	75.85	Pk	32.2	0	-39.76	68.29	-	-	74	-5.71	299	217	H
			2.4835	50.77	RMS	32.2	0	-39.76	43.21	54	-10.79	-	-	299	217	H
			2.483932	54.22	RMS	32.2	0	-39.75	46.67	54	-7.33	-	-	299	217	H
			2.485165	76.58	Pk	32.2	0	-39.75	69.03	-	-	74	-4.97	299	217	H
			2.4835	74.56	Pk	32.2	0	-39.76	67	-	-	74	-7	352	372	V
			2.4835	51.55	RMS	32.2	0	-39.76	43.99	54	-10.01	-	-	352	372	V
			2.485382	74.84	Pk	32.2	0	-39.75	67.29	-	-	74	-6.71	352	372	V
			2.485938	53.66	RMS	32.2	0	-39.76	46.1	54	-7.9	-	-	352	372	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 2: 802.11b Mode BANDEDGE (HIGH CHANNEL / 2462MHz)

HORIZONTAL RESULT

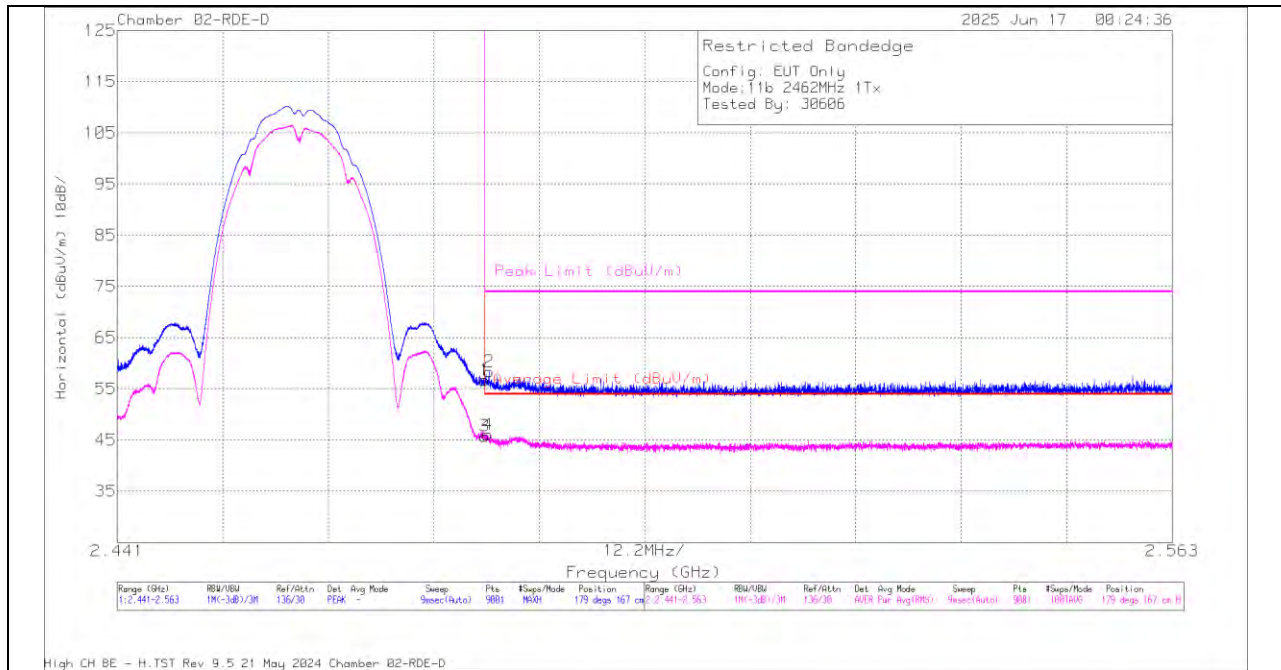


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	62.8	Pk	32.2	-38.3	0	56.7	-	-	74	-17.3	179	167	H
2	* 2.484013	64.46	Pk	32.2	-38.3	0	58.36	-	-	74	-15.64	179	167	H
3	* 2.4835	51.87	RMS	32.2	-38.3	0	45.77	54	-8.23	-	-	179	167	H
4	* 2.483823	52.15	RMS	32.2	-38.3	0	46.05	54	-7.95	-	-	179	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

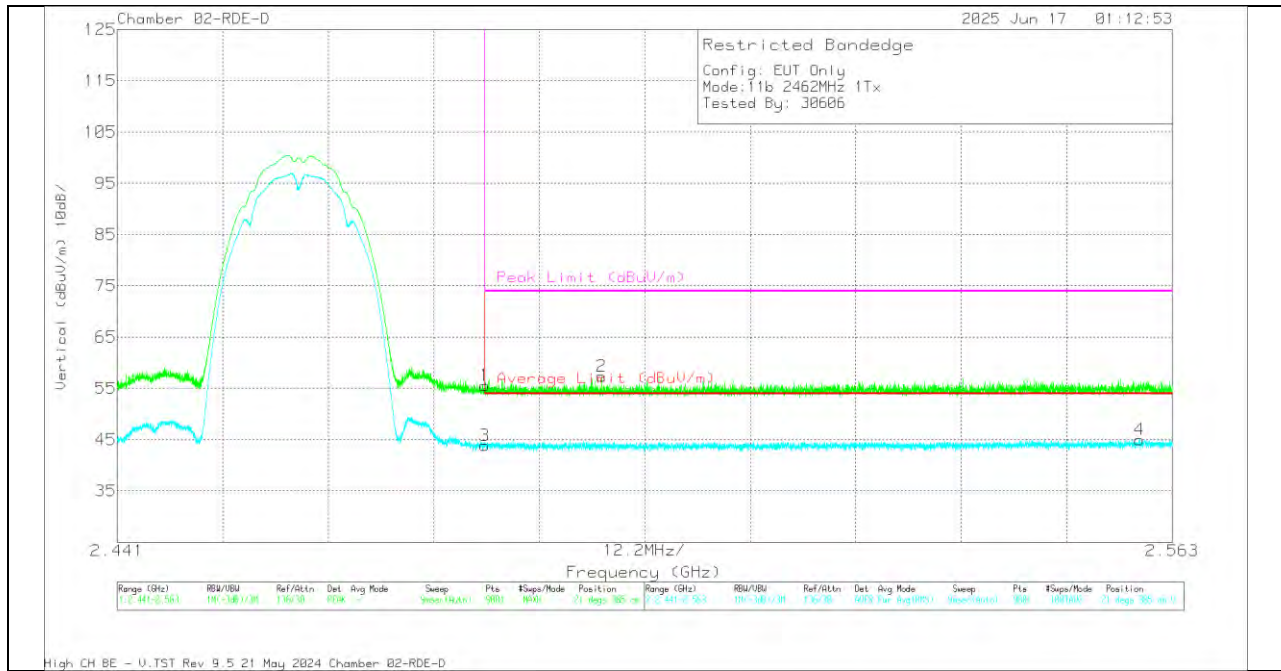VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	22674 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.66	Pk	32.2	-38.3	0	55.56	-	-	74	-18.44	21	385	V
2	* 2.497	63.34	Pk	32.2	-38.2	0	57.34	-	-	74	-16.66	21	385	V
3	* 2.4835	49.95	RMS	32.2	-38.3	0	43.85	54	-10.15	-	-	21	385	V
4	2.559222	50.6	RMS	32.4	-38	0	45	54	-9	-	-	21	385	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 1: 802.11be EHT20 SU Mode **BANDEDGE (HIGH CHANNEL / 2462MHz)**

HORIZONTAL RESULT

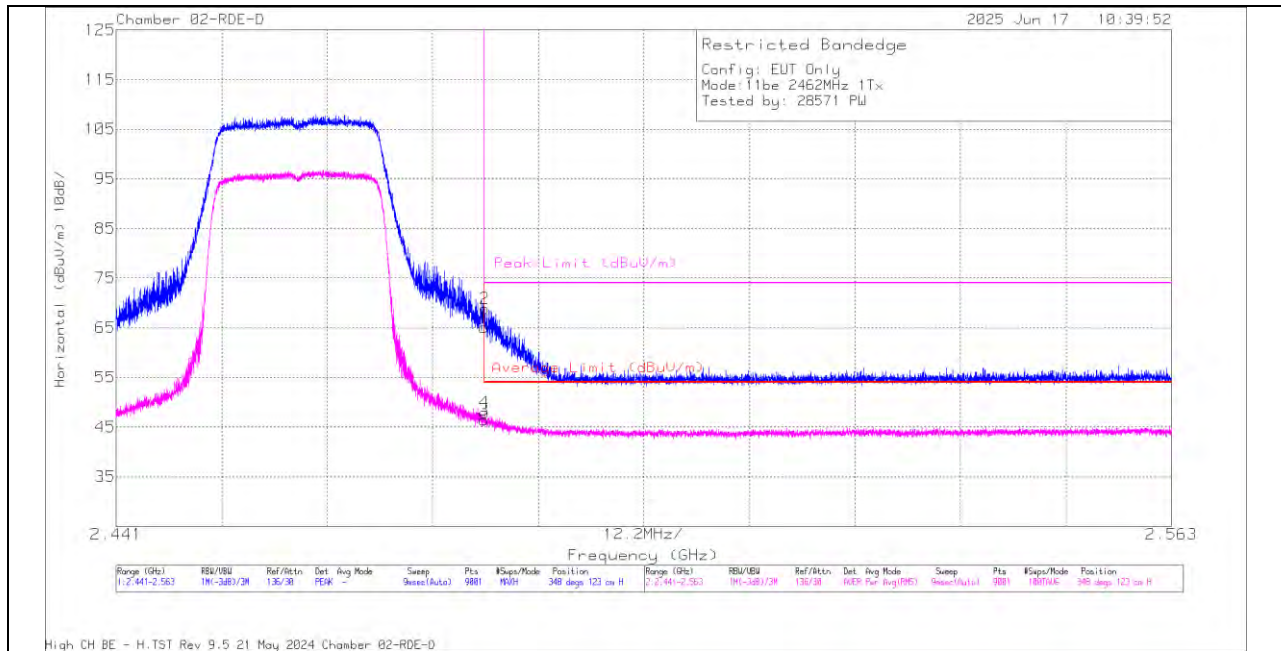


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Z26674 ACF (dBm)	Amp/Ctrl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.4835	71.16	PK	32.2	-38.3	0	65.06	-	-	74	-8.94	348	123	H
2	* 2.48362	74.93	PK	32.2	-38.3	0	68.83	-	-	74	-5.17	348	123	H
3	* 2.4835	52.55	RMS	32.2	-38.3	0	46.45	54	-7.55	-	-	348	123	H
4	* 2.483566	54.03	RMS	32.2	-38.3	0	47.93	54	-6.07	-	-	348	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

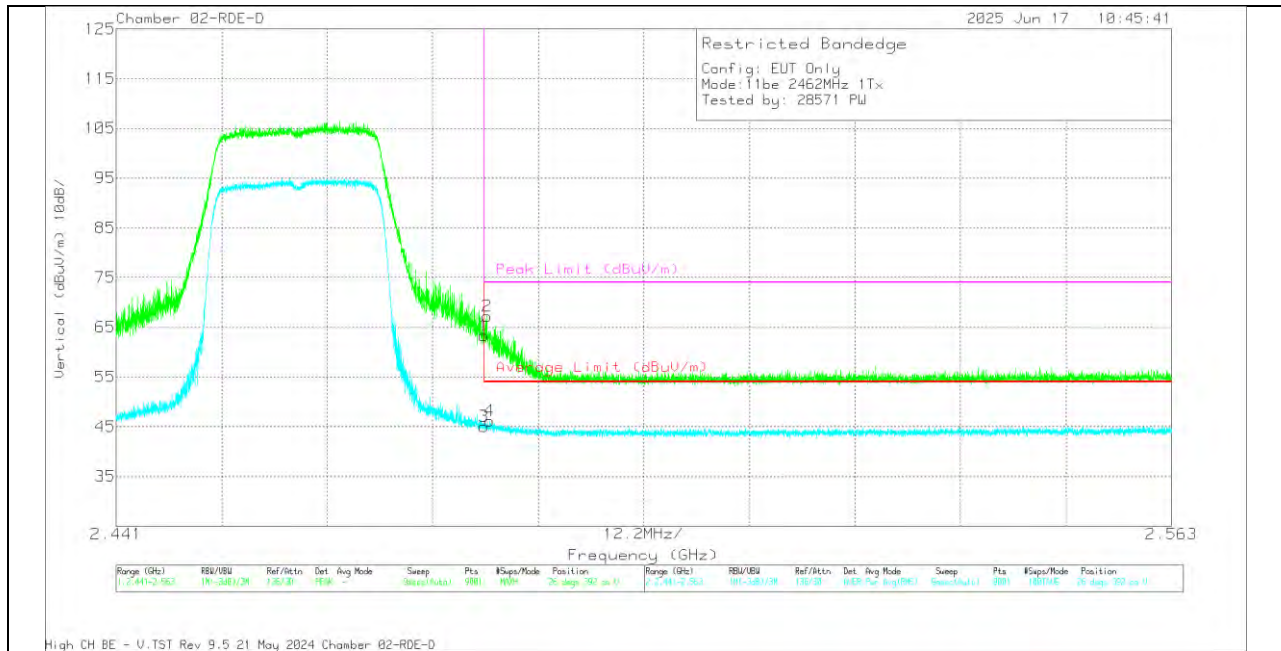VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cali/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.4835	69.42	Pk	32.2	-38.3	0	63.32	-	-	74	-10.68	26	392	V
2	* 2.483851	73.31	Pk	32.2	-38.3	0	67.21	-	-	74	-6.79	26	392	V
3	* 2.4835	51.1	RMS	32.2	-38.3	0	45	54	-9	-	-	26	392	V
4	* 2.484176	52.28	RMS	32.2	-38.3	0	46.18	54	-7.82	-	-	26	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

10.1.4. 802.11b/n/be SISO MODE – HIGH BANDEDGE – CHANNEL 12

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2467	2	* 2.4835	65.03	Pk	32.2	0	-38.3	58.93	-	-	74	-15.07	183	172	H
			* 2.484745	66.38	Pk	32.2	0	-38.3	60.28	-	-	74	-13.72	183	172	H
			* 2.4835	54.57	RMS	32.2	0	-38.3	48.47	54	-5.53	-	-	183	172	H
			* 2.485152	57.05	RMS	32.2	0	-38.3	50.95	54	-3.05	-	-	183	172	H
			* 2.4835	62.56	Pk	32.2	0	-38.3	56.46	-	-	74	-17.54	225	351	V
			* 2.484772	64.34	Pk	32.2	0	-38.3	58.24	-	-	74	-15.76	225	351	V
		1	* 2.4835	52.56	RMS	32.2	0	-38.3	46.46	54	-7.54	-	-	225	351	V
			* 2.485084	54.28	RMS	32.2	0	-38.3	48.18	54	-5.82	-	-	225	351	V
			* 2.4835	65.99	Pk	32.2	0	-38.3	58.89	-	-	74	-14.11	346	110	H
			* 2.483579	66.4	Pk	32.2	0	-38.3	60.3	-	-	74	-13.7	346	110	H
			* 2.4835	56.12	RMS	32.2	0	-38.3	50.02	54	-3.98	-	-	346	110	H
			* 2.485016	56.73	RMS	32.2	0	-38.3	50.63	54	-3.37	-	-	346	110	H
			* 2.4835	63.41	Pk	32.2	0	-38.3	57.31	-	-	74	-16.69	26	392	V
			* 2.485111	64.45	Pk	32.2	0	-38.3	58.35	-	-	74	-15.65	26	392	V
			* 2.4835	53.03	RMS	32.2	0	-38.3	46.93	54	-7.07	-	-	26	392	V
			* 2.483607	53.49	RMS	32.2	0	-38.3	47.39	54	-6.61	-	-	26	392	V
HT20	2467	2	* 2.4835	73.25	Pk	32.2	0	-38.3	67.15	-	-	74	-6.85	175	170	H
			* 2.483647	74.69	Pk	32.2	0	-38.3	68.59	-	-	74	-5.41	175	170	H
			* 2.4835	52.38	RMS	32.2	0	-38.3	46.28	54	-7.72	-	-	175	170	H
			* 2.48362	55.72	RMS	32.2	0	-38.3	49.62	54	-4.38	-	-	175	170	H
			* 2.4835	65.91	Pk	32.2	0	-38.3	59.81	-	-	74	-14.19	9	383	V
			* 2.483905	66.57	Pk	32.2	0	-38.3	60.47	-	-	74	-13.53	9	383	V
			* 2.4835	50.04	RMS	32.2	0	-38.3	43.94	54	-10.06	-	-	9	383	V
			2.550668	50.99	RMS	32.4	0	-38.1	45.29	54	-8.71	-	-	9	383	V
		1	* 2.4835	74.69	Pk	32.2	0	-38.3	68.59	-	-	74	-5.41	353	163	H
			* 2.483674	75.43	Pk	32.2	0	-38.3	69.33	-	-	74	-4.67	353	163	H
			* 2.4835	51.17	RMS	32.2	0	-38.3	45.07	54	-8.93	-	-	353	163	H
			* 2.483715	54.13	RMS	32.2	0	-38.3	48.03	54	-5.97	-	-	353	163	H
			* 2.4835	70.62	Pk	32.2	0	-38.3	64.52	-	-	74	-9.48	29	390	V
			* 2.483607	72.89	Pk	32.2	0	-38.3	66.79	-	-	74	-7.21	29	390	V
			* 2.4835	51.4	RMS	32.2	0	-38.3	45.3	54	-8.7	-	-	29	390	V
			* 2.484	52.59	RMS	32.2	0	-38.3	46.49	54	-7.51	-	-	29	390	V
EHT20 (SU Mode)	2467	2	* 2.4835	74.61	Pk	32.2	0	-40.1	66.71	-	-	74	-7.29	193	179	H
			* 2.483674	76.54	Pk	32.2	0	-40.1	68.64	-	-	74	-5.36	193	179	H
			* 2.4835	54.49	RMS	32.2	0	-40.1	46.59	54	-7.41	-	-	193	179	H
			* 2.483715	55.95	RMS	32.2	0	-40.1	48.05	54	-5.95	-	-	193	179	H
			* 2.4835	65.63	Pk	32.2	0	-40.1	57.73	-	-	74	-16.27	46	150	V
			* 2.483525	67.59	Pk	32.2	0	-40.1	59.69	-	-	74	-14.31	46	150	V
			* 2.4835	50.15	RMS	32.2	0	-40.1	42.25	54	-11.75	-	-	46	150	V
			2.509363	51.05	RMS	32.2	0	-39.77	43.48	54	-10.52	-	-	46	150	V
		1	* 2.4835	70.93	Pk	32.2	0	-38.3	64.83	-	-	74	-9.17	169	148	H
			* 2.483823	75.49	Pk	32.2	0	-38.3	69.39	-	-	74	-4.61	169	148	H
			* 2.4835	51.64	RMS	32.2	0	-38.3	45.54	54	-8.46	-	-	169	148	H
			* 2.484637	53.17	RMS	32.2	0	-38.3	47.07	54	-6.93	-	-	169	148	H
			* 2.4835	64.42	Pk	32.2	0	-38.3	58.32	-	-	74	-15.68	329	104	V
			* 2.483512	64.97	Pk	32.2	0	-38.3	58.87	-	-	74	-15.13	329	104	V
			* 2.4835	50.07	RMS	32.2	0	-38.3	43.97	54	-10.03	-	-	329	104	V
			2.558178	50.65	RMS	32.4	0	-38	45.05	54	-8.95	-	-	329	104	V
EHT20 (RU 26 / Index 8)	2467	2	* 2.4835	75.39	Pk	32.2	0	-39.76	67.83	-	-	74	-6.17	136	246	H
			2.4835	52.75	RMS	32.2	0	-39.76	45.19	54	-8.81	-	-	136	246	H
			2.483607	76.1	Pk	32.2	0	-39.75	68.55	-	-	74	-5.45	136	246	H
			2.483837	53.78	RMS	32.2	0	-39.75	46.23	54	-7.77	-	-	136	246	H
			2.4835	74.01	Pk	32.2	0	-39.76	66.45	-	-	74	-7.55	180	306	V
			2.4835	50.66	RMS	32.2	0	-39.76	43.1	54	-10.9	-	-	180	306	V
			2.483539	52.68	RMS	32.2	0	-39.75	45.13	54	-8.87	-	-	180	306	V
			2.483566	74.22	Pk	32.2	0	-39.75	66.67	-	-	74	-7.33	180	306	V
		1	2.4835	76.53	Pk	32.2	0	-39.76	68.97	-	-	74	-5.03	291	131	H
			2.4835	50.16	RMS	32.2	0	-39.76	42.6	54	-11.4	-	-	291	131	H
			2.483552	76.73	Pk	32.2	0	-39.75	69.18	-	-	74	-4.82	291	131	H
			2.48442	54	RMS	32.2	0	-39.75	46.45	54	-7.55	-	-	291	131	H
			2.4835	74.56	Pk	32.2	0	-39.76	67	-	-	74	-7	342	374	V
			2.4835	50.39	RMS	32.2	0	-39.76	42.83	54	-11.17	-	-	342	374	V
			2.483525	74.87	Pk	32.2	0	-39.75	67.32	-	-	74	-6.68	342	374	V
			2.483769	53.08	RMS	32.2	0	-39.75	45.53	54	-8.47	-	-	342	374	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 2: 802.11b Mode BANDEDGE (HIGH CHANNEL / 2467MHz)

HORIZONTAL RESULT

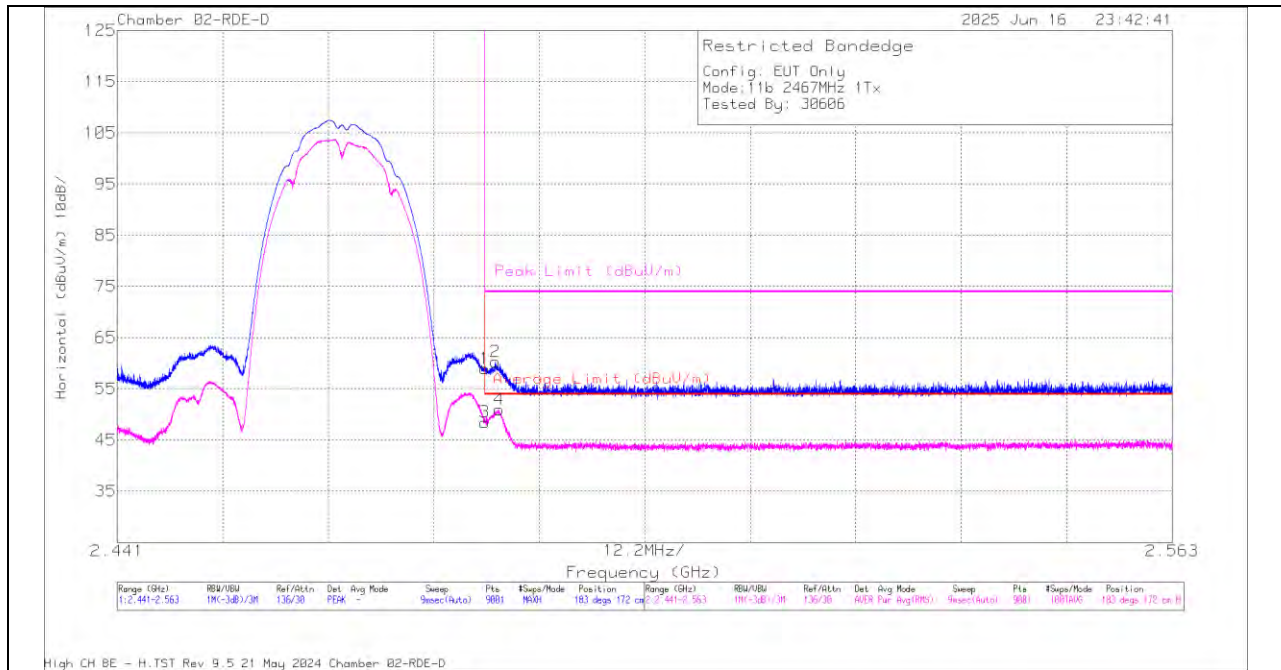


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	65.03	Pk	32.2	-38.3	0	58.93	-	-	74	-15.07	183	172	H
2	* 2.484745	66.38	Pk	32.2	-38.3	0	60.28	-	-	74	-13.72	183	172	H
3	* 2.4835	54.57	RMS	32.2	-38.3	0	48.47	54	-5.53	-	-	183	172	H
4	* 2.485152	57.05	RMS	32.2	-38.3	0	50.95	54	-3.05	-	-	183	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

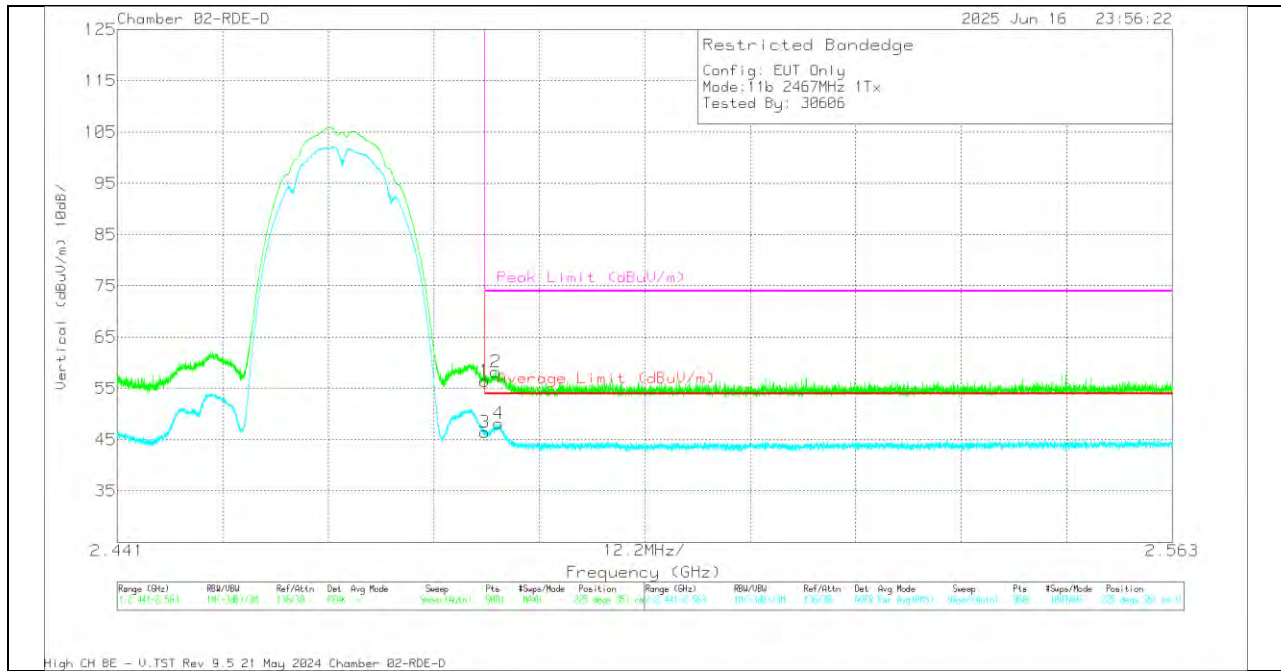VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	62.56	Pk	32.2	-38.3	0	56.46	-	-	74	-17.54	225	351	V
2	* 2.484772	64.34	Pk	32.2	-38.3	0	58.24	-	-	74	-15.76	225	351	V
3	* 2.4835	52.56	RMS	32.2	-38.3	0	46.46	54	-7.54	-	-	225	351	V
4	* 2.485084	54.28	RMS	32.2	-38.3	0	48.18	54	-5.82	-	-	225	351	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna 1: 802.11be EHT20 SU Mode BANDEDGE (HIGH CHANNEL / 2467MHz)

HORIZONTAL RESULT

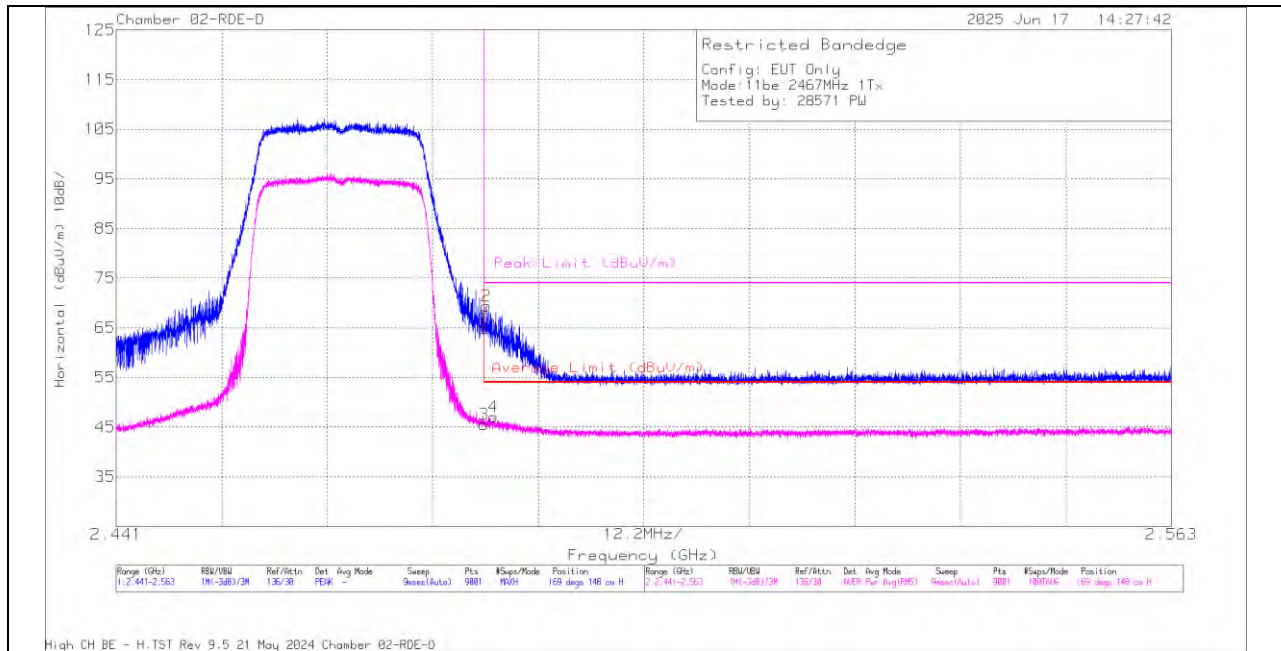

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	22674 ACF (dBm)	Amp/Ctrl/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.4835	70.93	PK	32.2	-38.3	0	64.93	-	-	74	-9.17	169	148	H
2	* 2.48322	75.49	PK	32.2	-38.3	0	69.39	-	-	74	-4.61	169	148	H
3	* 2.4835	51.64	RMS	32.2	-38.3	0	45.54	54	-8.46	-	-	169	148	H
4	* 2.484637	53.17	RMS	32.2	-38.3	0	47.07	54	-6.93	-	-	169	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

Chamber 02-RDE-D 2025 Jun 17 14:33:13

Restricted Bandedge
 Config: EUT Only
 Mode: 11be 2467MHz 1Tx
 Tested by: 28571 Pld

Vertical (dBuV/m) 10dB/

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

Frequency (GHz)

2.441 12.2MHz/ 2.563

Range (GHz)	RBW/MBW	Ref/Attn	Det	Avg Mode	Sweep	Pts	#Sweeps/Mode	Position	Range (GHz)	RBW/MBW	Ref/Attn	Det	Avg Mode	Sweep	Pts	#Sweeps/Mode	Position
2.441 - 2.563	100 kHz / 200 kHz	1.50 dB	Peak	Max	Auto	1000	1000	1000 deg 100 us 11	2.441 - 2.563	100 kHz / 200 kHz	1.50 dB	Peak	Max	Auto	1000	1000	1000 deg 100 us 11

High CH BE - U.TST Rev 9.5 21 Mar 2024 Chamber 02-RDE-D

Marker	Frequency (GHz)	Meter Reading (dBmV)	Det	28674 ACF (dBm)	Amp/ChdPsd (dB)	DCCF (dB)	Corrected Reading (dBmV/m)	Average Limit (dBmV/m)	Margin (dB)	Peak Limit (dBmV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarizn
1	* 2.4835	64.42	PK	32.2	-38.3	0	58.32	-	-	74	-15.68	329	104	V
2	* 2.483512	64.97	PK	32.2	-38.3	0	58.87	-	-	74	-15.13	329	104	V
3	* 2.4835	50.07	RMS	32.2	-38.3	0	43.07	54	-10.03	-	-	329	104	V
4	2.558178	50.65	RMS	32.4	-38	0	45.05	54	-8.95	-	-	329	104	V

Page 107 of 171