





**(802.11 HT20 MODE CHAIN 2)**

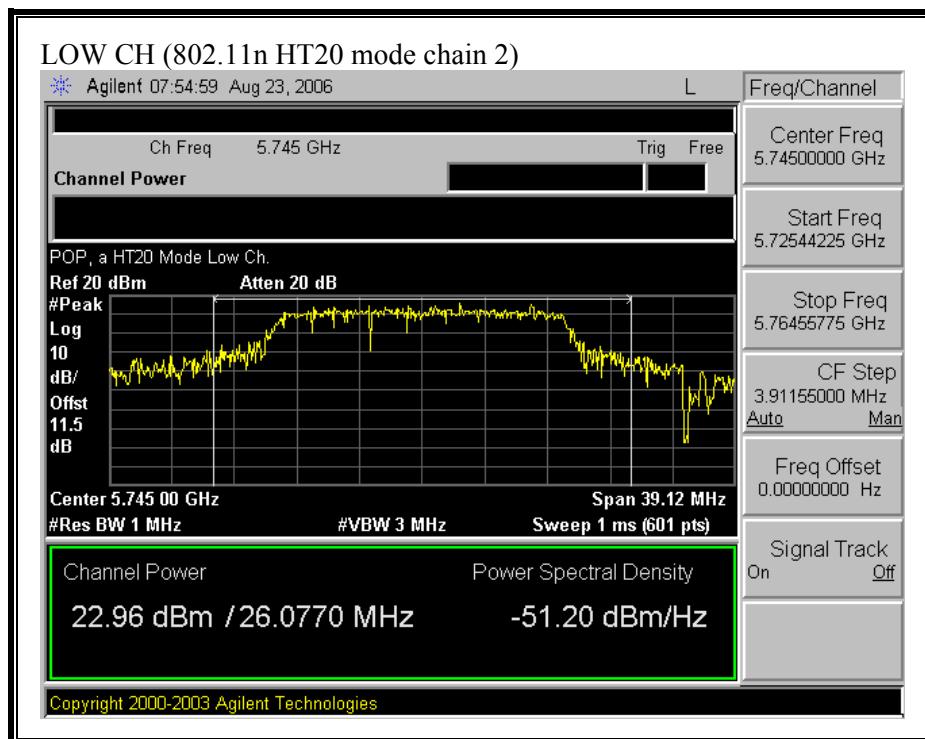


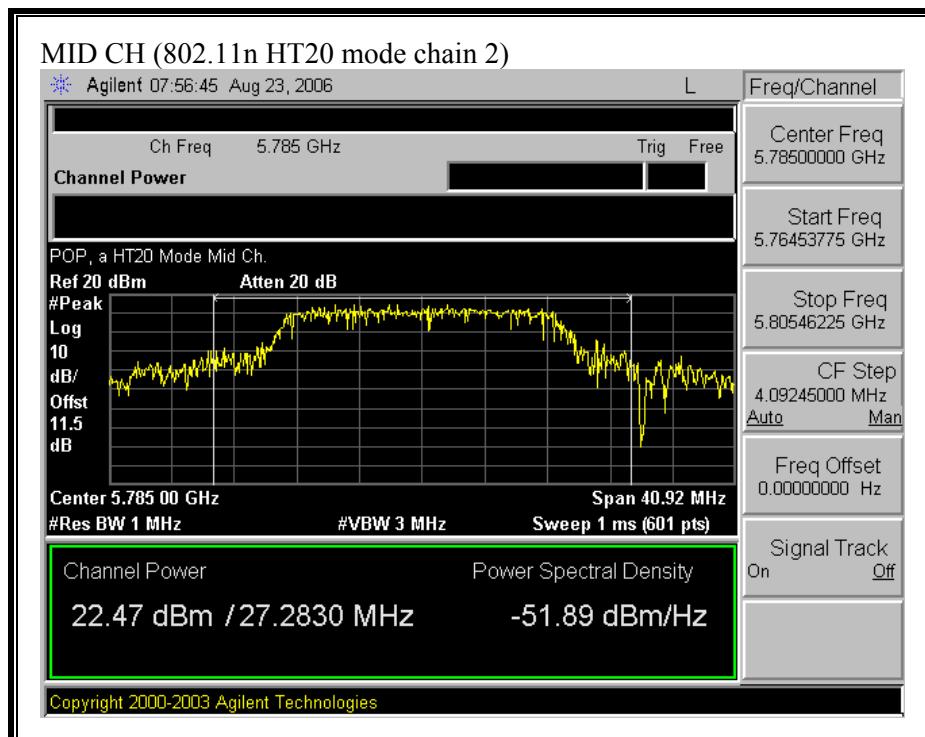


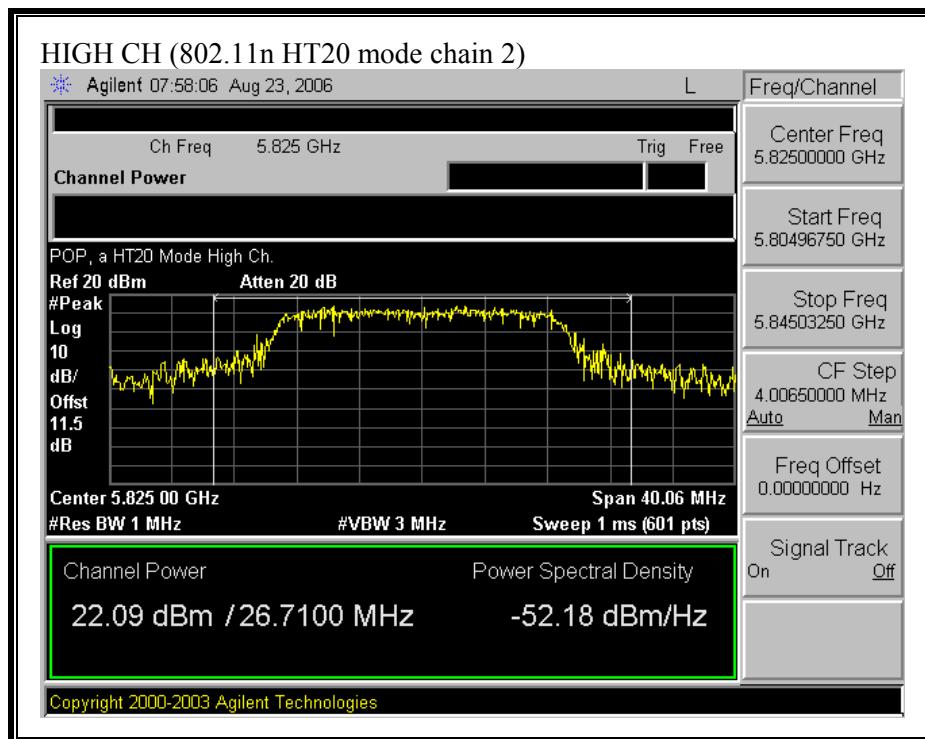


**(802.11 HT40 MODE CHAIN 0)**

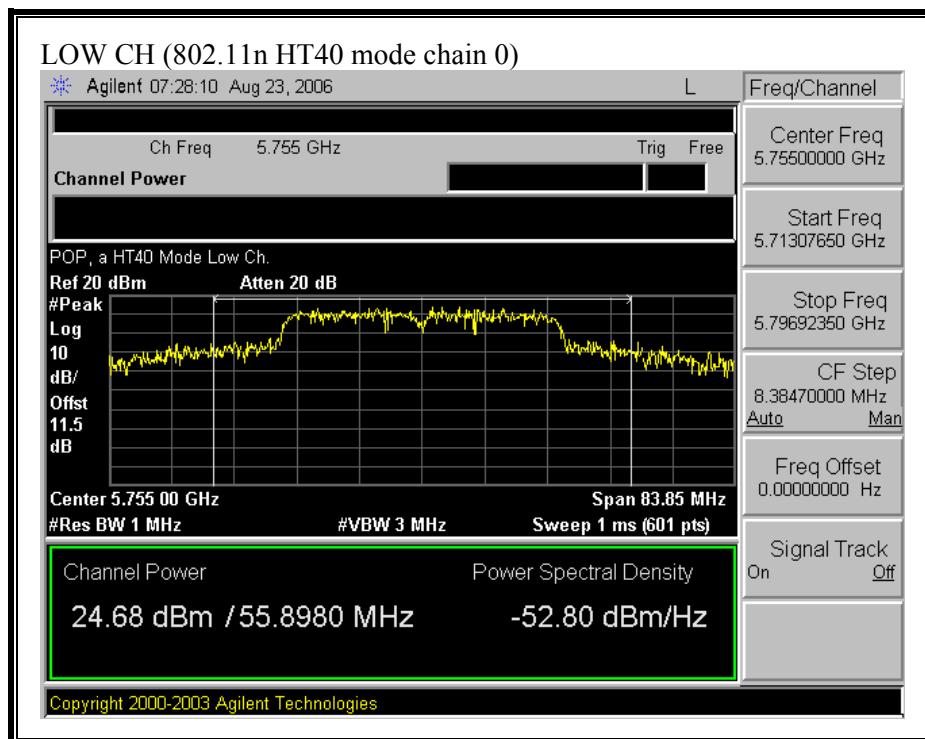


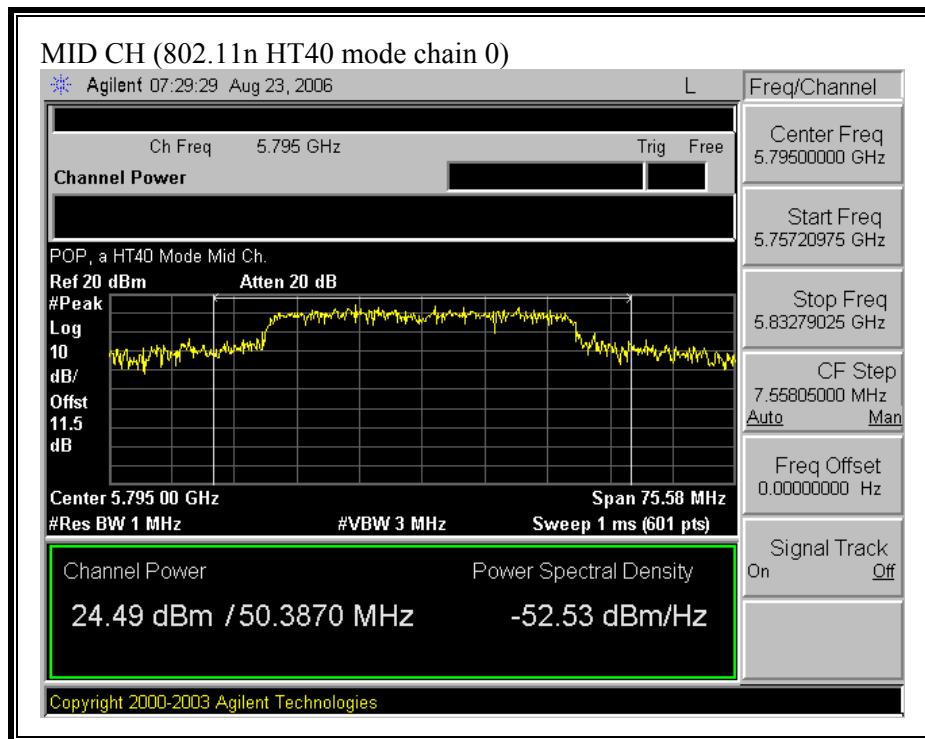


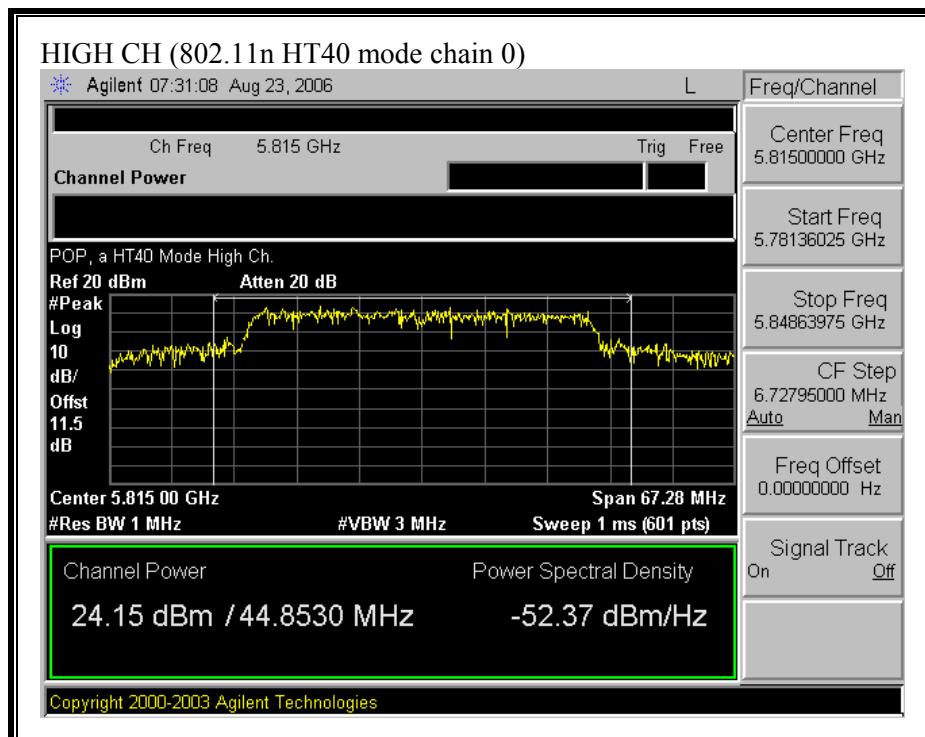


**(802.11 HT40 MODE CHAIN 1)**

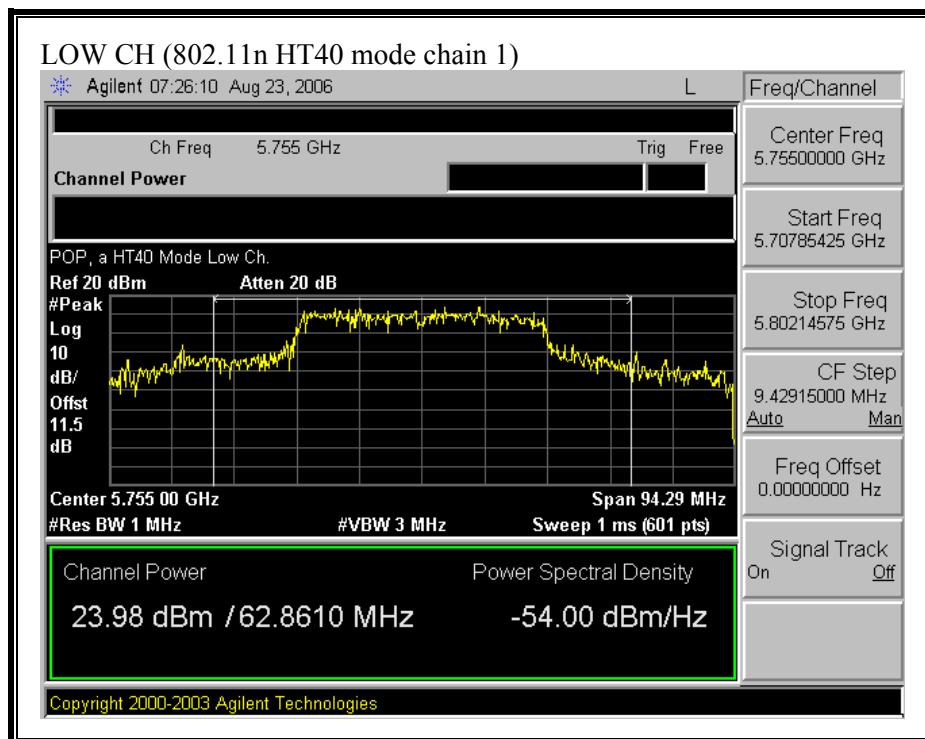


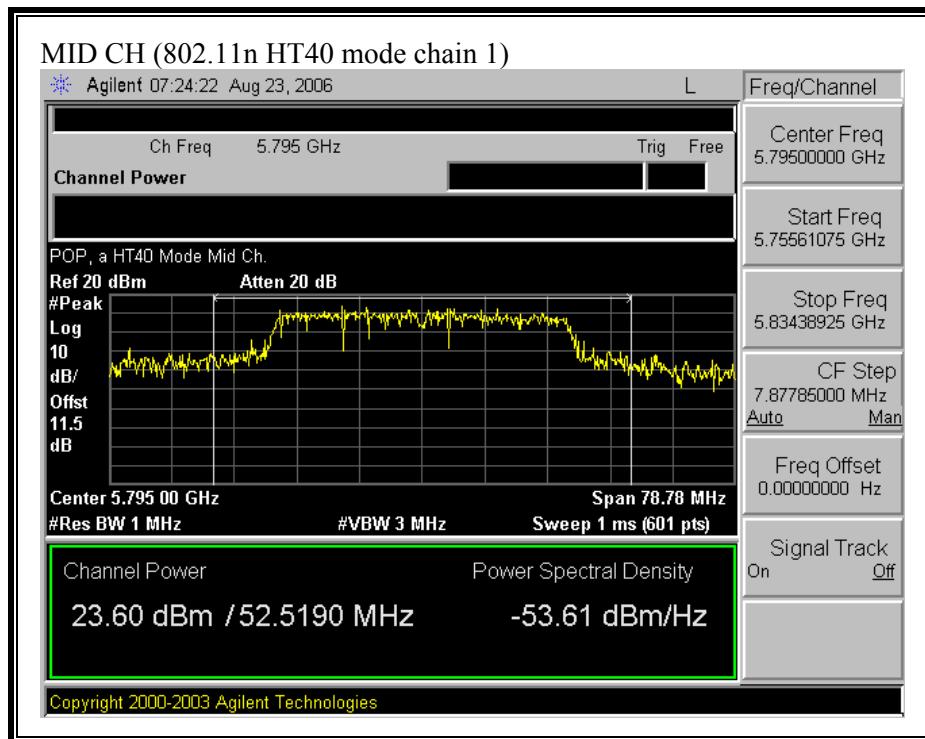


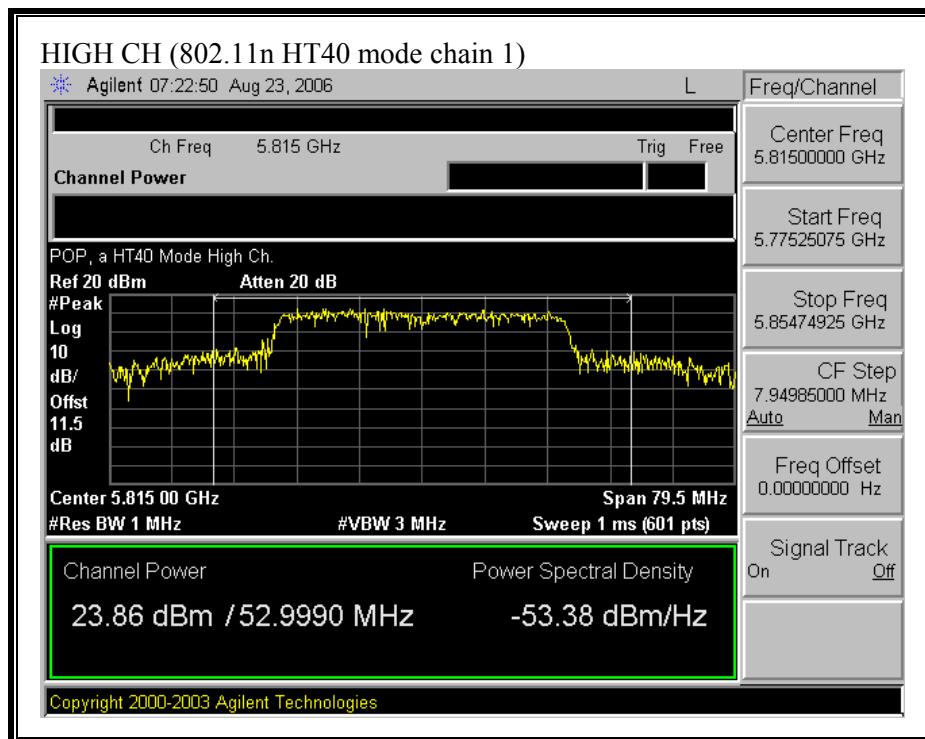

**(802.11 HT40 MODE CHAIN 2)**

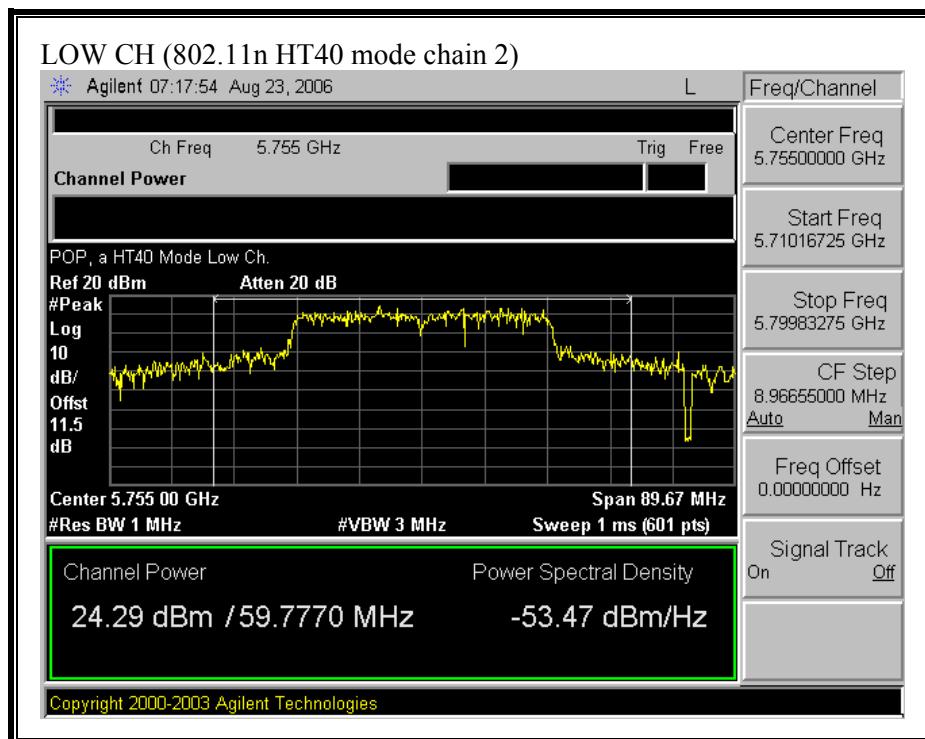

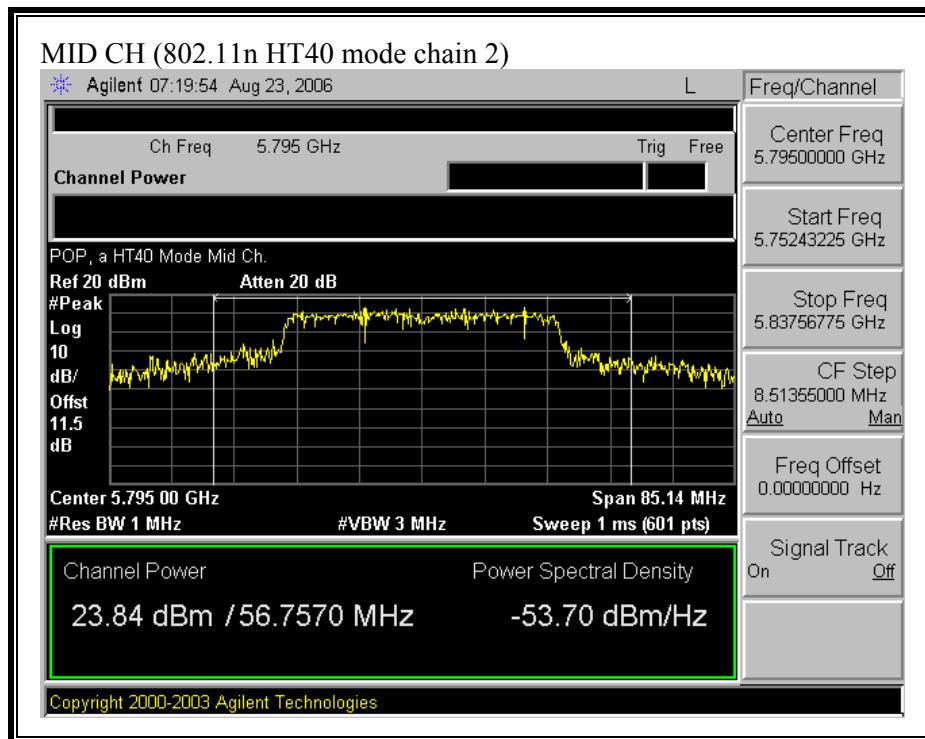

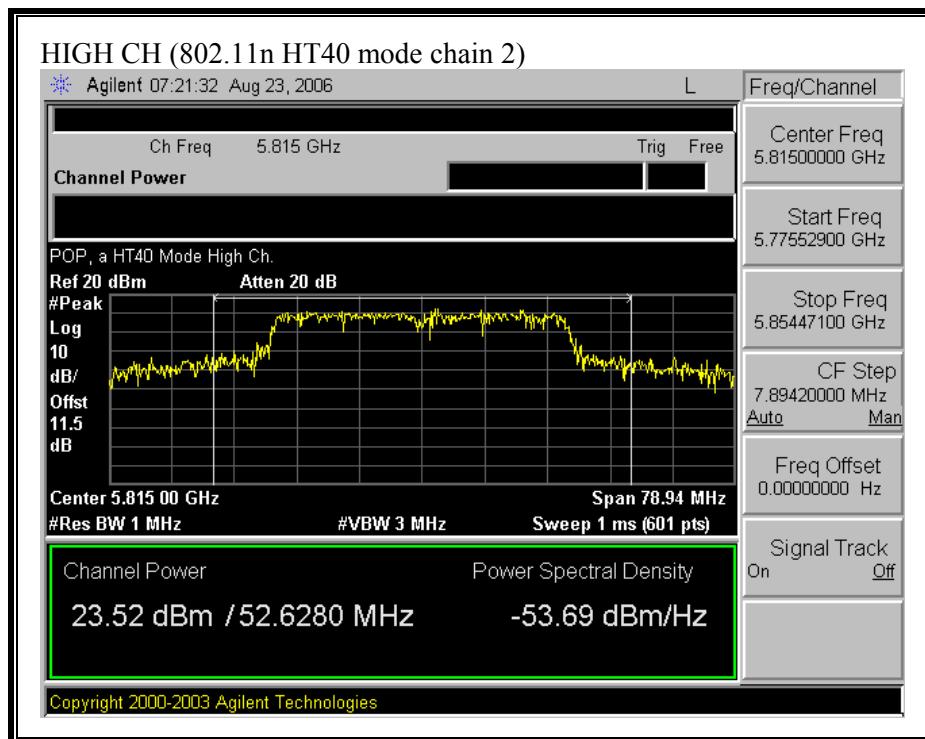

#### 7.2.4. PEAK POWER SPECTRAL DENSITY

##### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using  $RBW = 3$  kHz and  $VBW > 3$  kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

Each chain is measured separately and the total PPSD is calculated using:

$$\text{Total PPSD} = 10 \log (10^8 (\text{Chain 0 PPSD} / 10) + 10^8 (\text{Chain 1 PPSD} / 10) + 10^8 (\text{Chain 2 PPSD} / 10))$$

## **RESULTS**

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Chain 2 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
-----------------	--------------------	--------------------------	--------------------------	--------------------------	------------------------	----------------	----------------

### 802.11a Mode

Low	5745	-5.46	-5.41	-6.21	-0.91	8	-8.91
Middle	5785	-1.33	-1.73	-0.58	3.58	8	-4.42
High	5825	-3.11	-5.52	-6.30	0.02	8	-7.98

### 802.11n HT20 Mode

Low	5745	-3.16	-0.82	-0.52	3.42	8	-4.58
Middle	5785	-1.50	-1.30	-0.98	3.52	8	-4.48
High	5825	-2.58	-1.65	-0.19	3.41	8	-4.59

### 802.11n HT40 Mode

Low	5755	-5.55	-3.73	-4.08	0.39	8	-7.61
Mid	5795	-5.14	-4.27	-4.92	0.01	8	-7.99
High	5815	-6.24	-3.43	-4.33	0.26	8	-7.74

**RESULTS WITH COMBINER**

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Using Combiner (dBm)	Limit (dBm)	Margin (dB)
-----------------	--------------------	---------------------------------	----------------	----------------

802.11a Mode

Low	5745	1.05	8	-6.95
Middle	5785	5.41	8	-2.59
High	5825	0.54	8	-7.46


802.11n HT20 Mode


Low	5745	5.00	8	-3.00
Middle	5785	4.34	8	-3.66
High	5825	6.58	8	-1.42


802.11n HT40 Mode

Low	5755	0.13	8	-7.87
Mid	5795	1.54	8	-6.46
High	5815	0.32	8	-7.68


**(802.11a MODE CHAIN 0)**

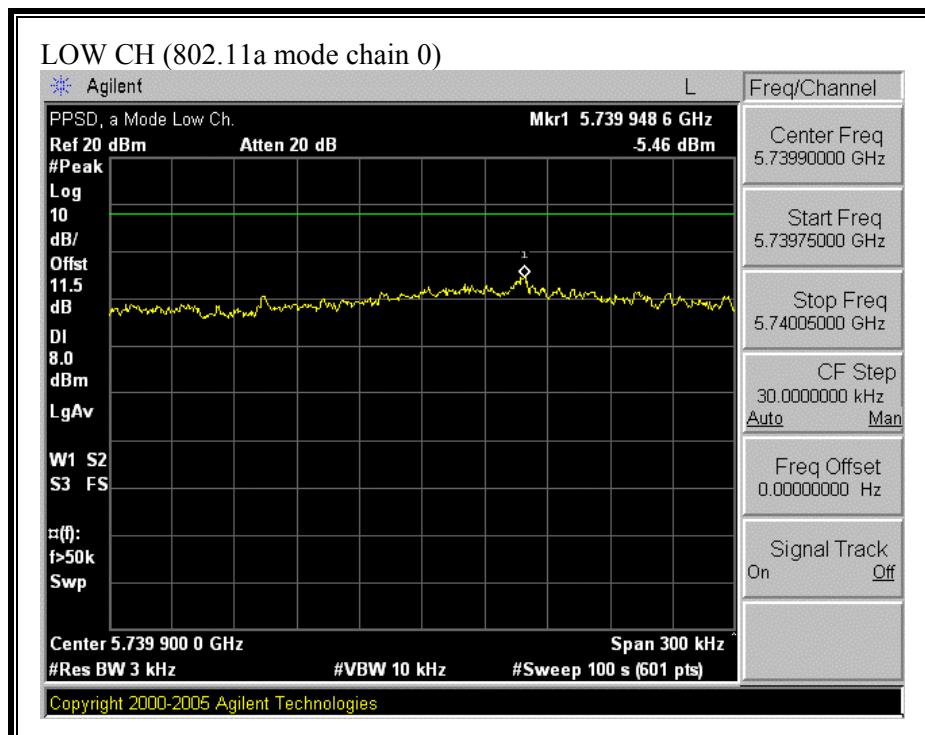


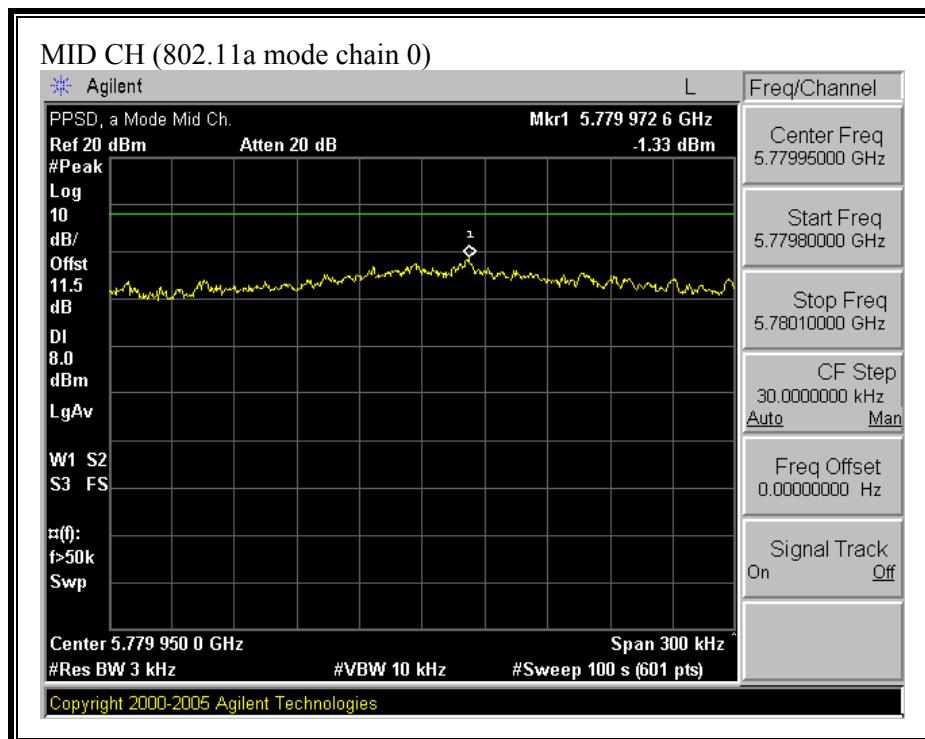


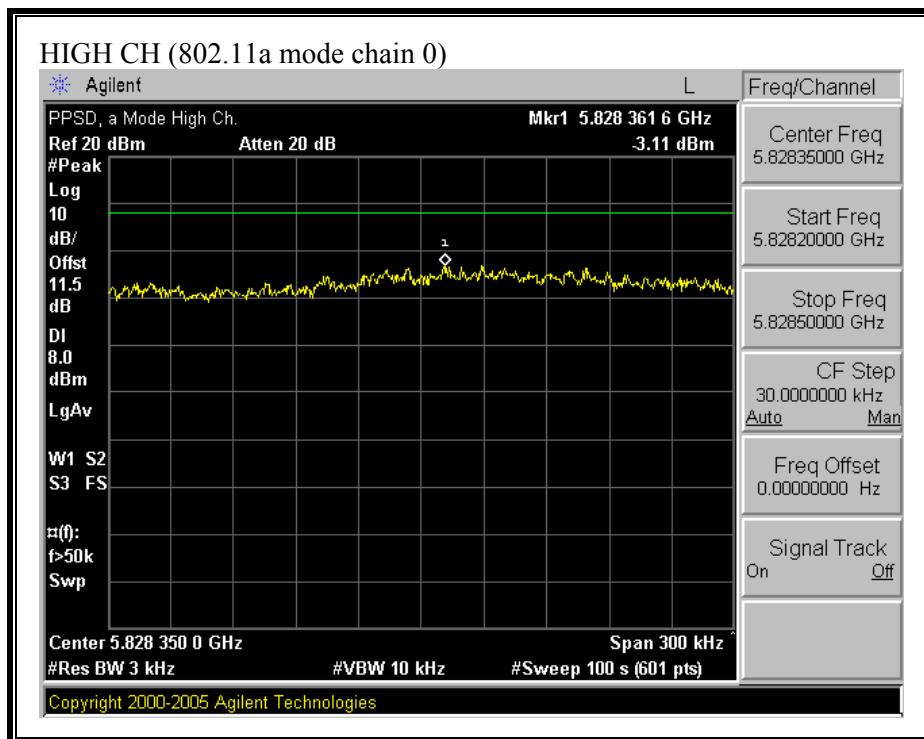


**(802.11a MODE CHAIN 1)**

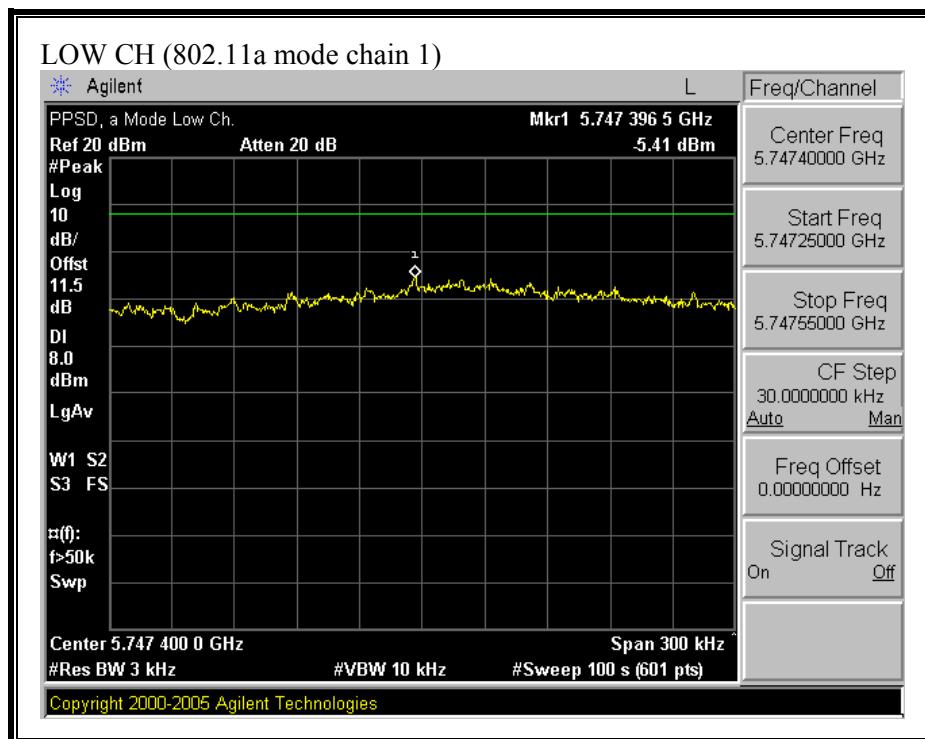


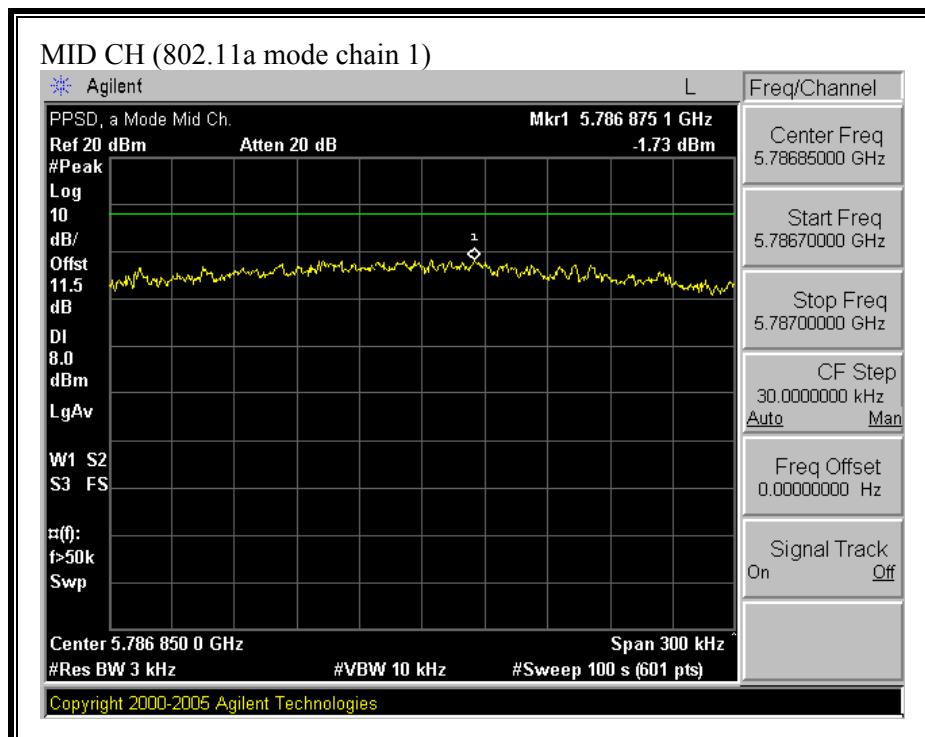


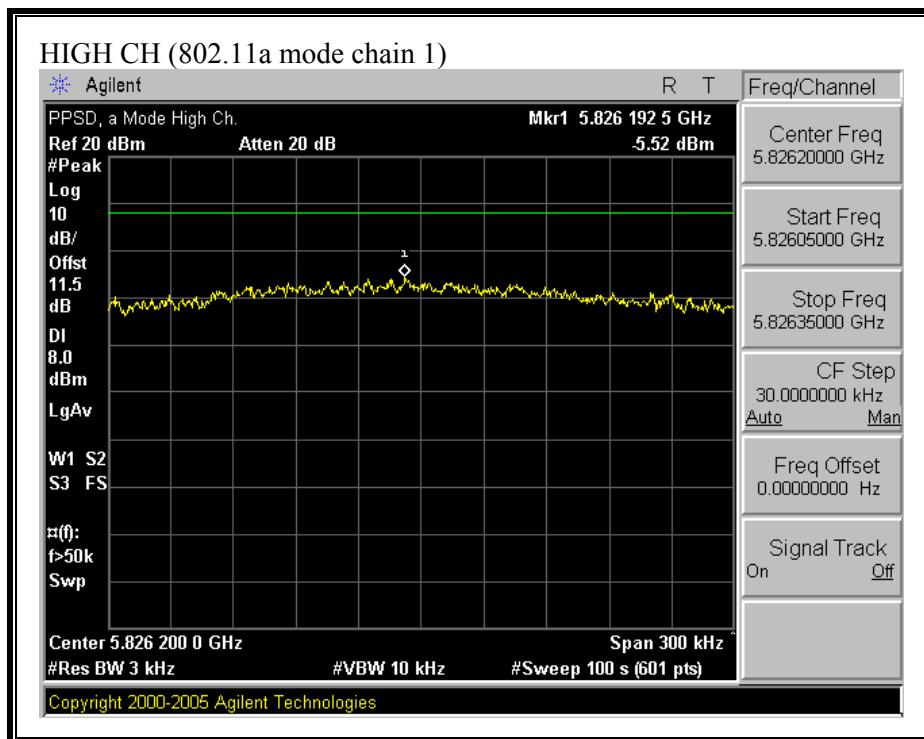


**(802.11a MODE CHAIN 2)**

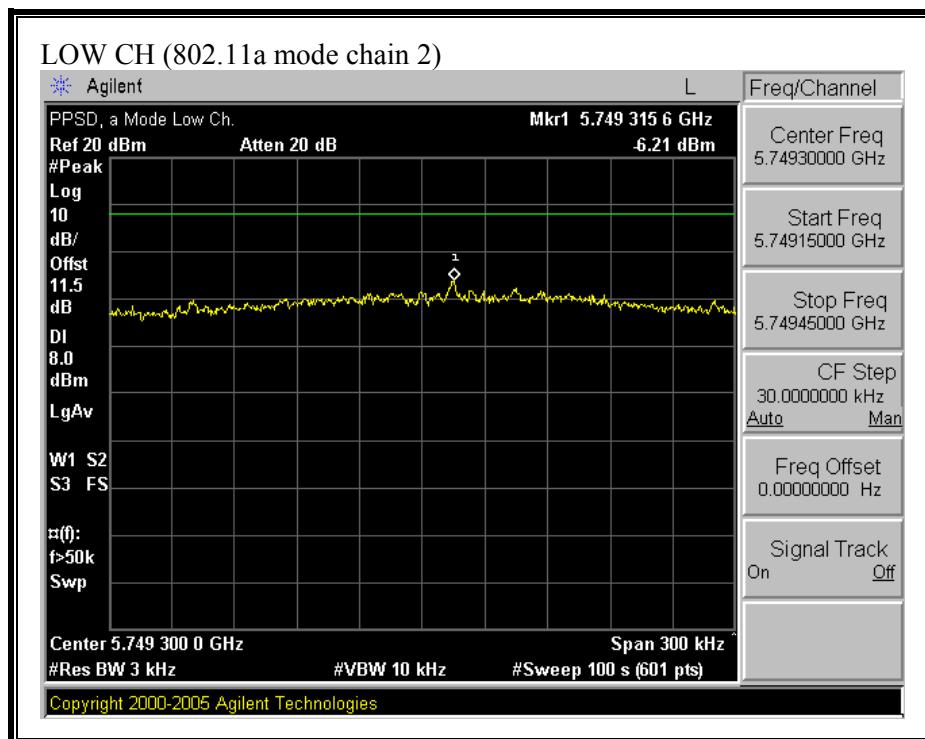


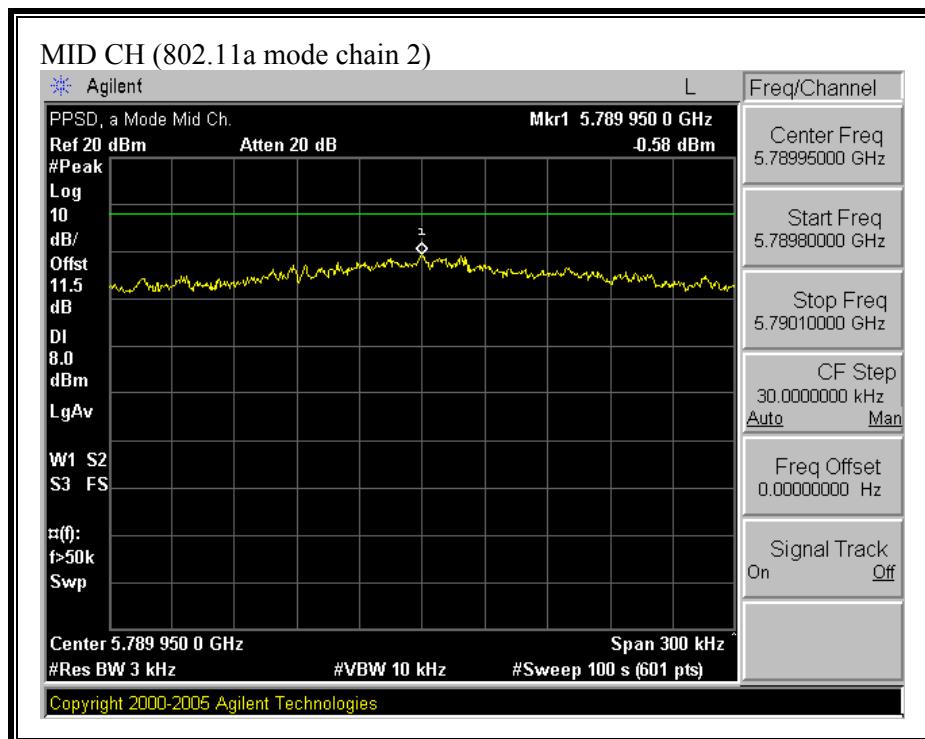


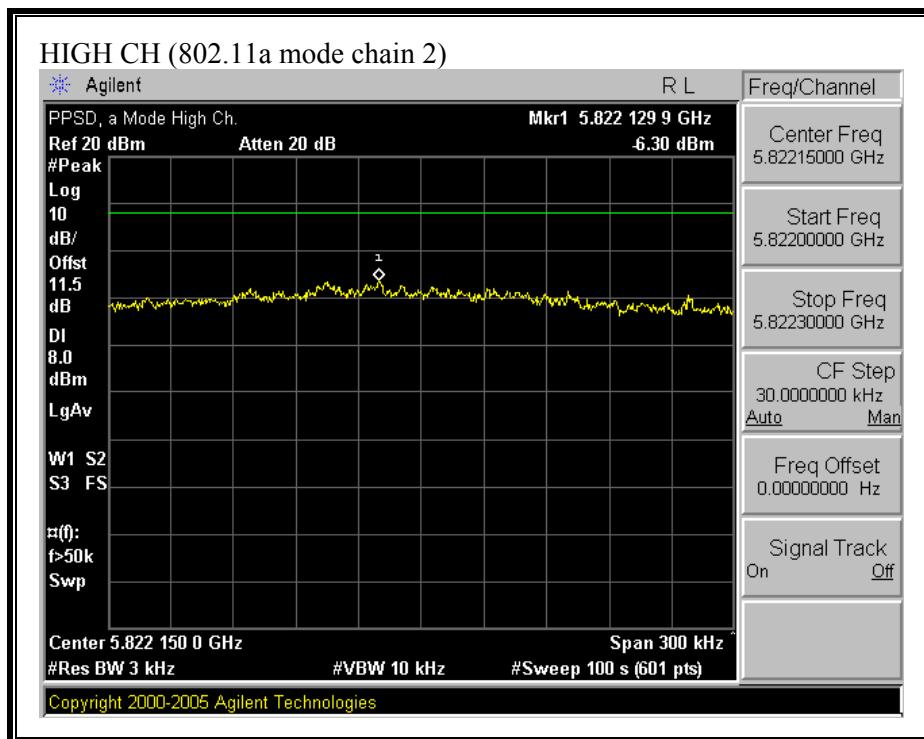


**(802.11n HT20 MODE CHAIN 0)**

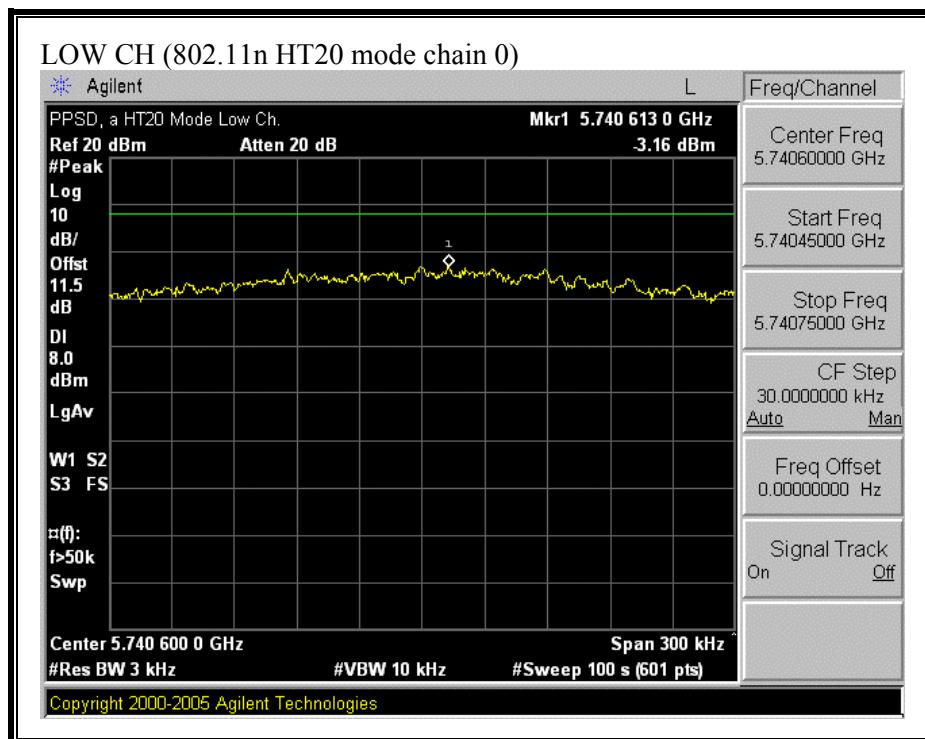


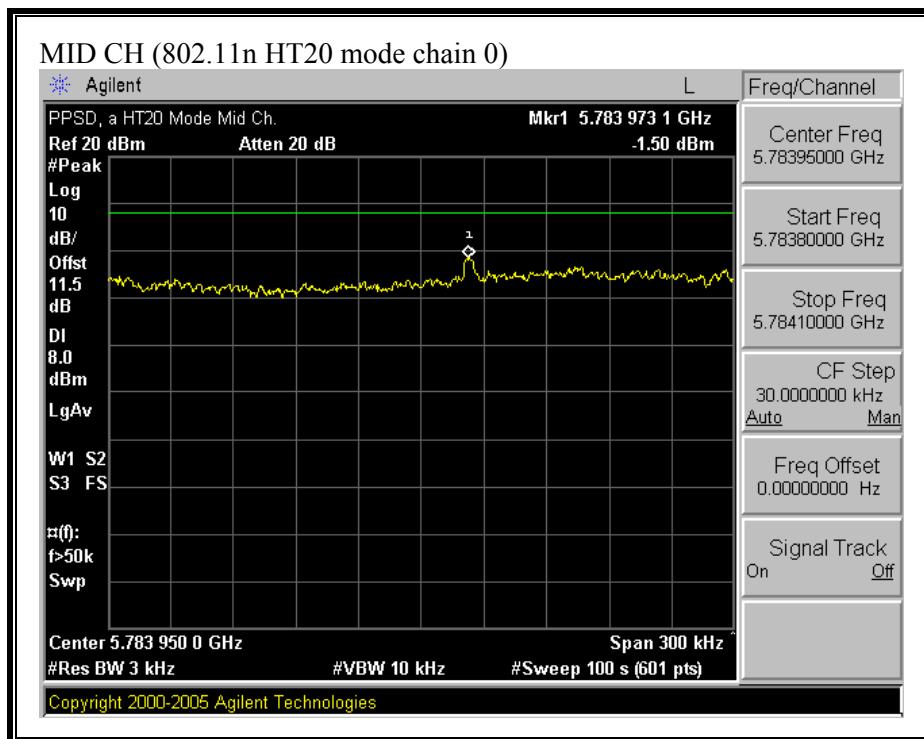


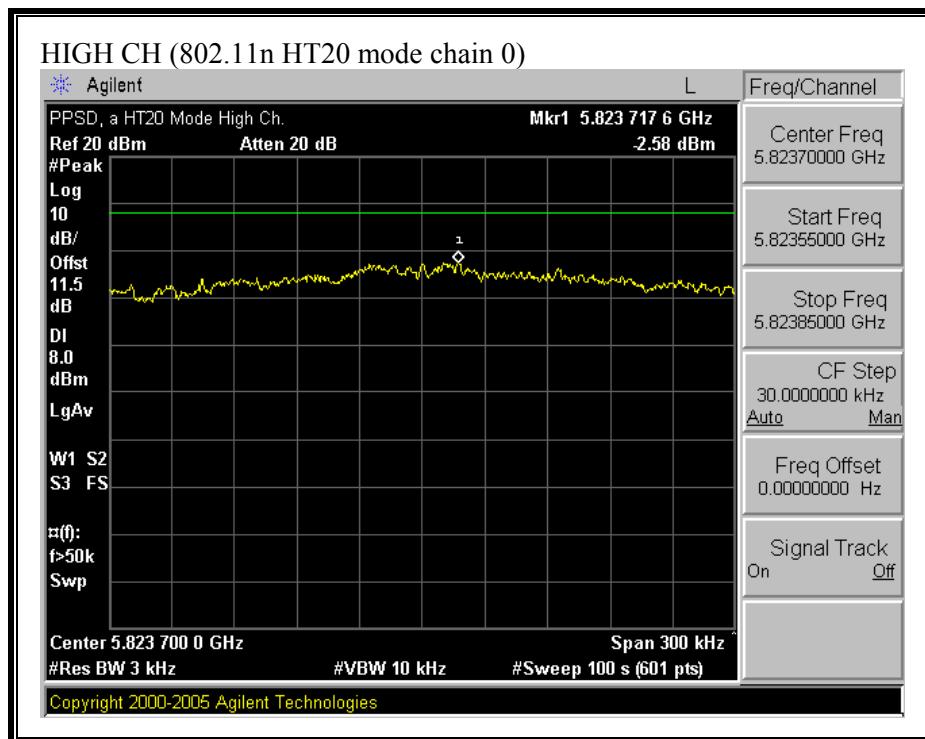


**(802.11n HT20 MODE CHAIN 1)**

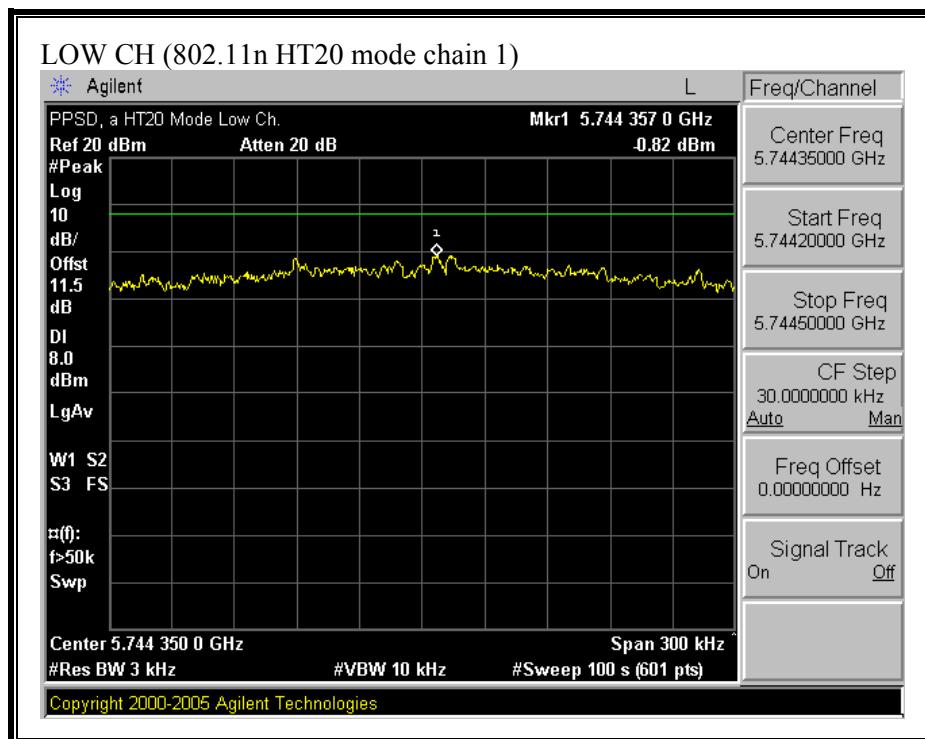


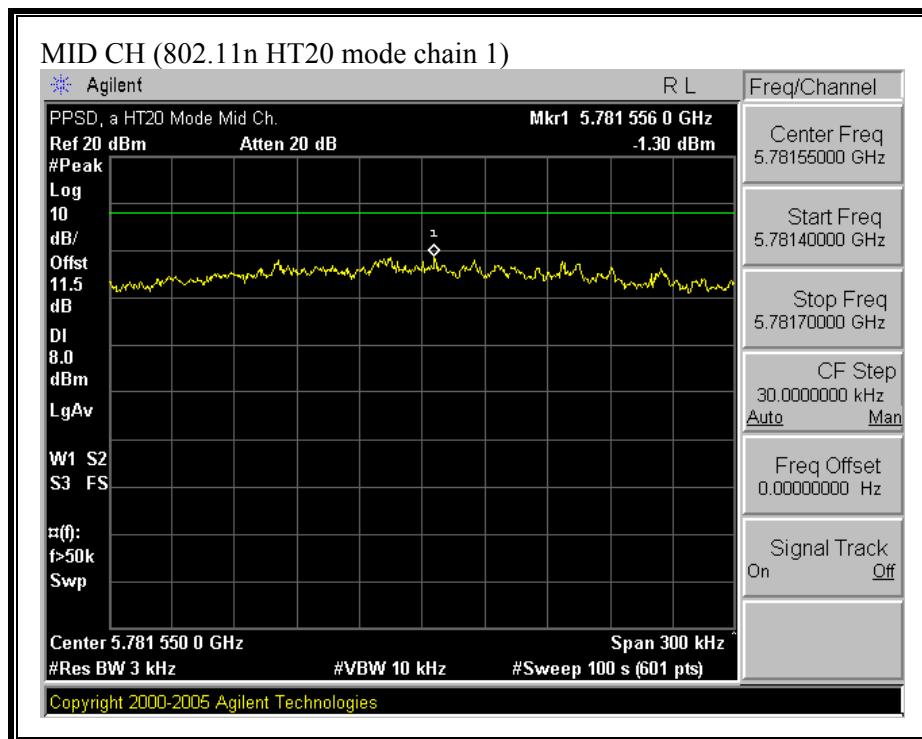


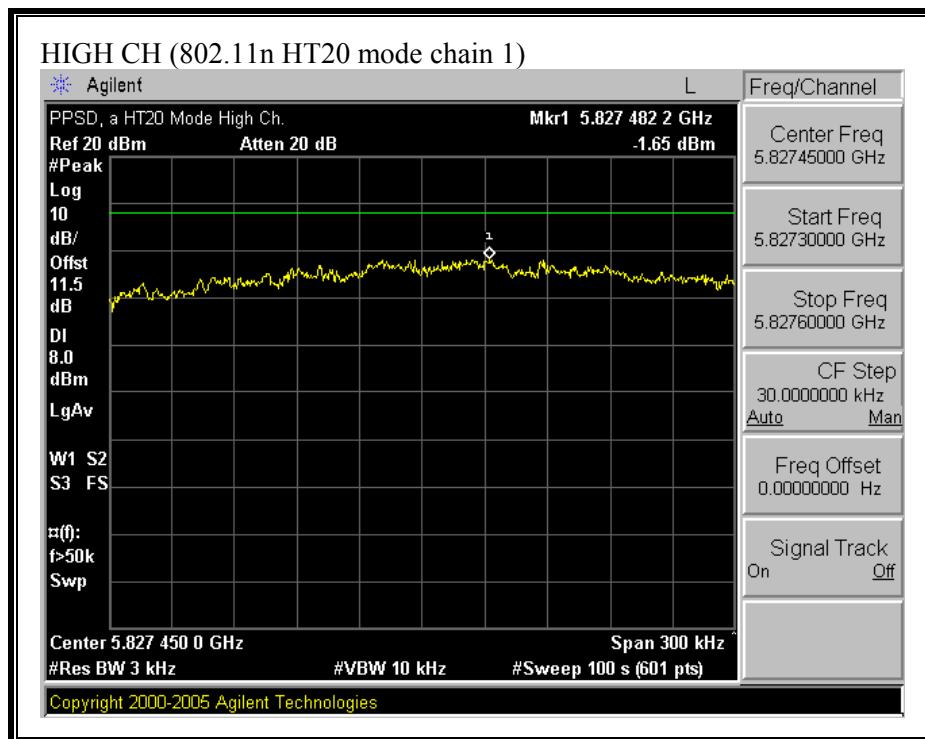


**(802.11 HT20 MODE CHAIN 2)**

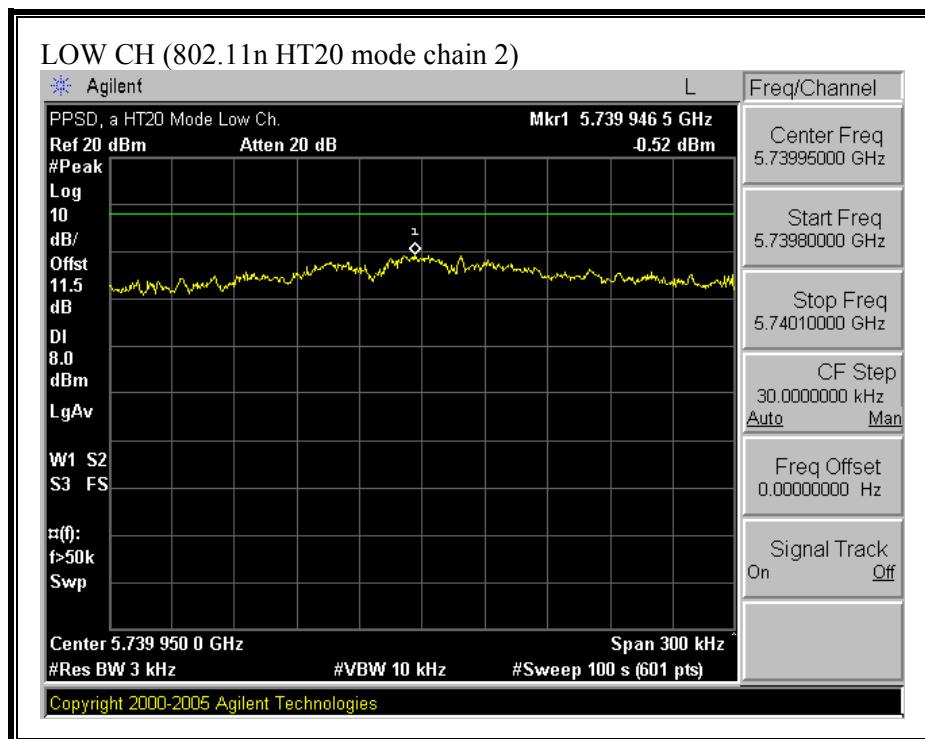


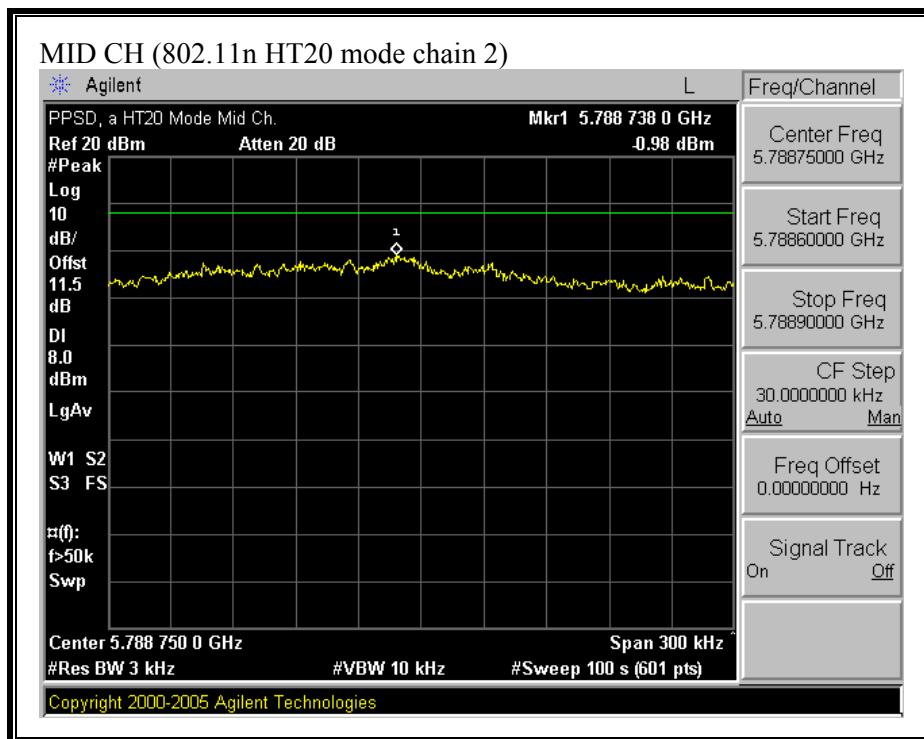


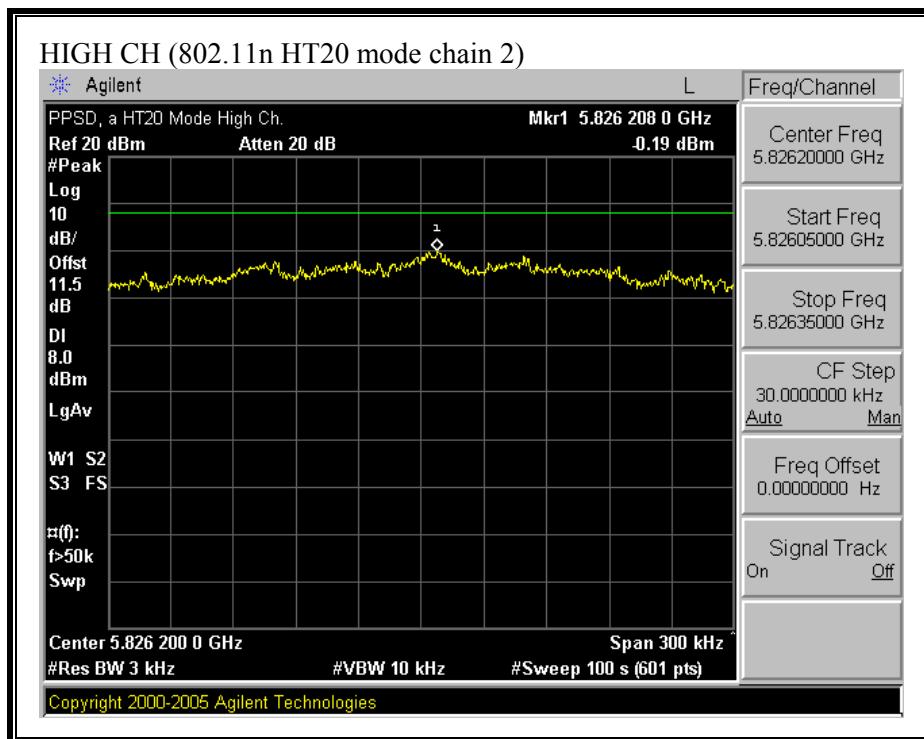


**(802.11 HT40 MODE CHAIN 0)**

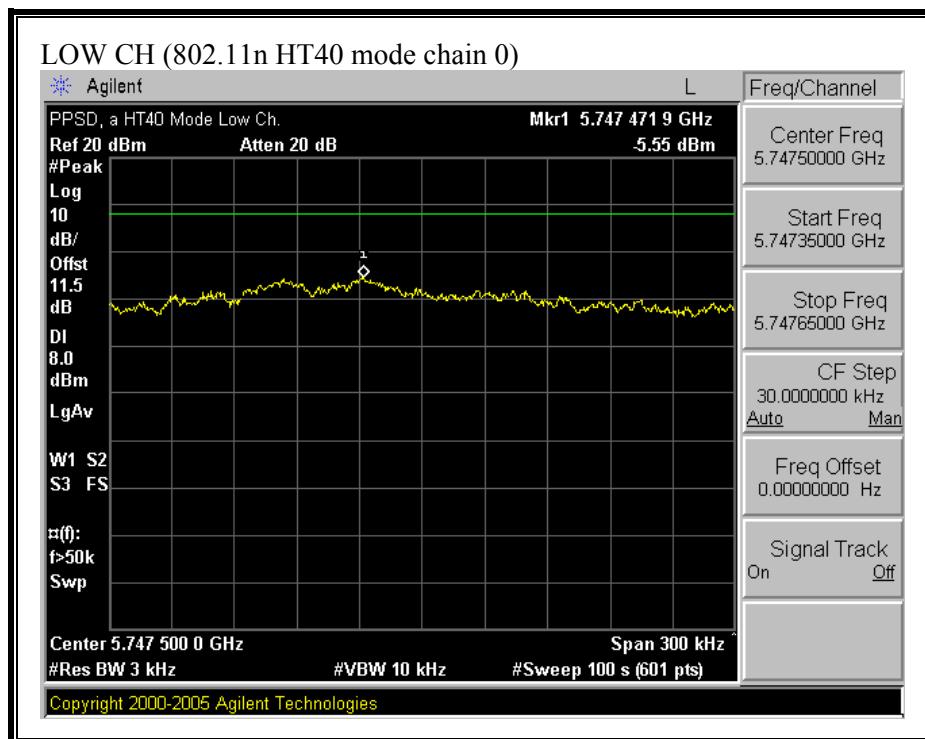


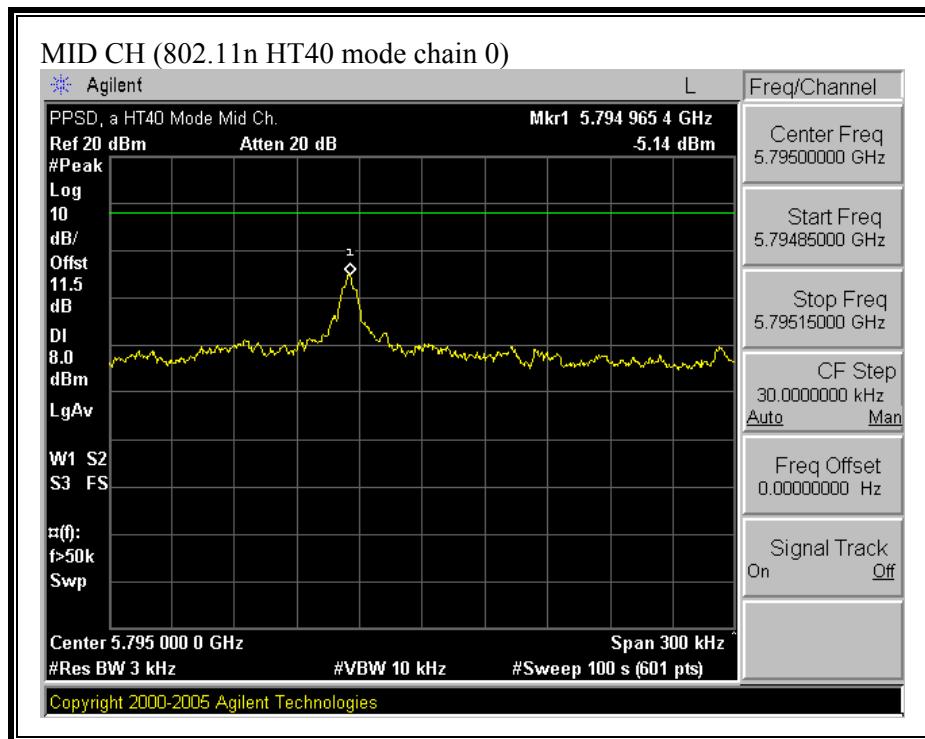


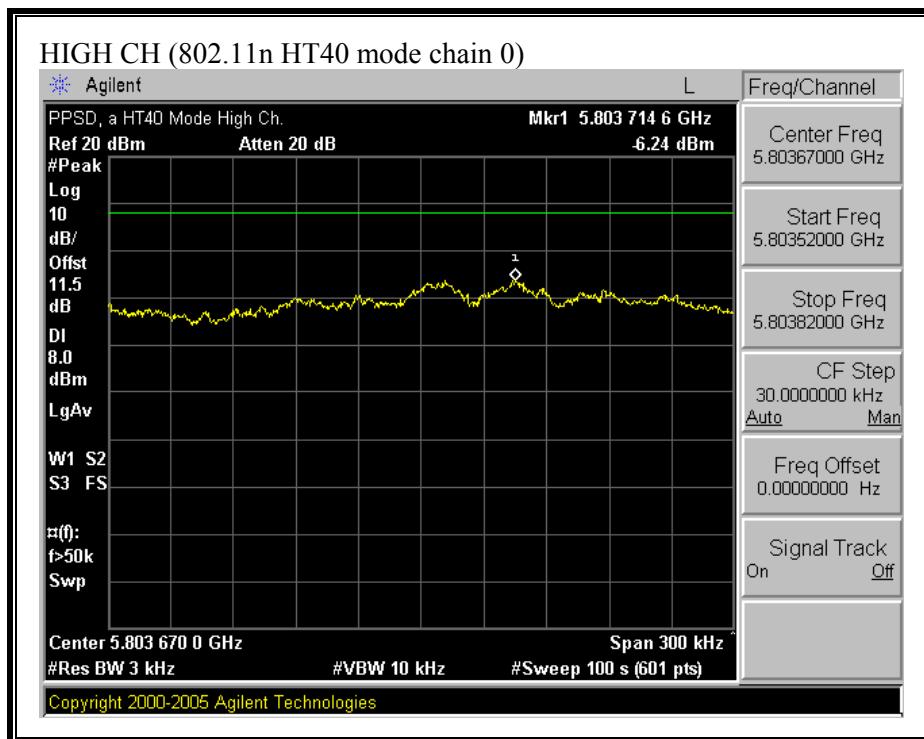


**(802.11 HT40 MODE CHAIN 1)**

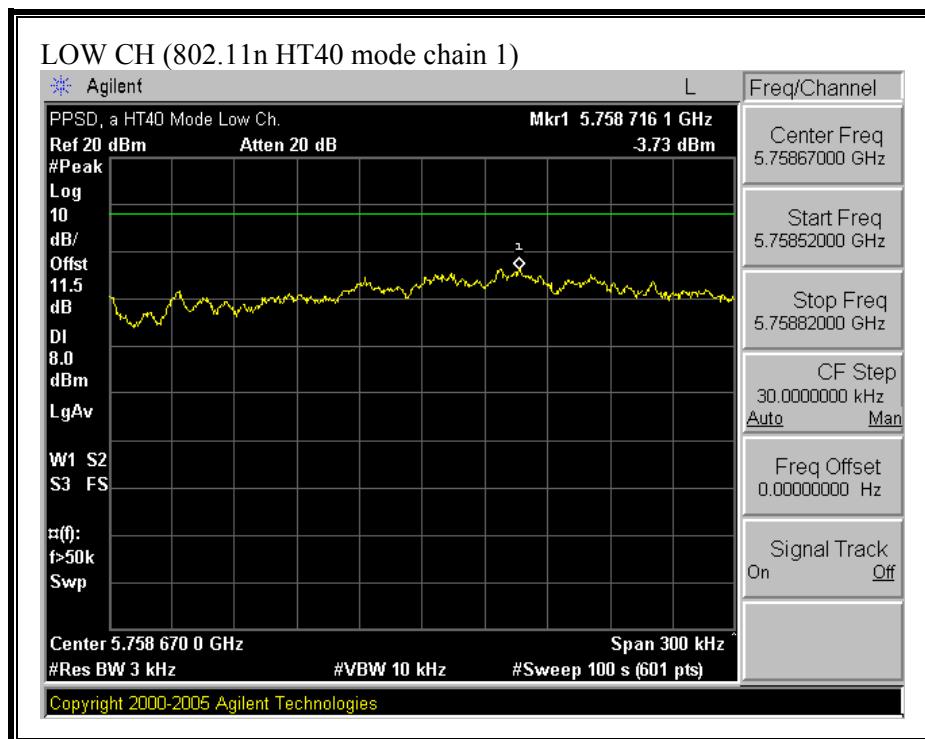


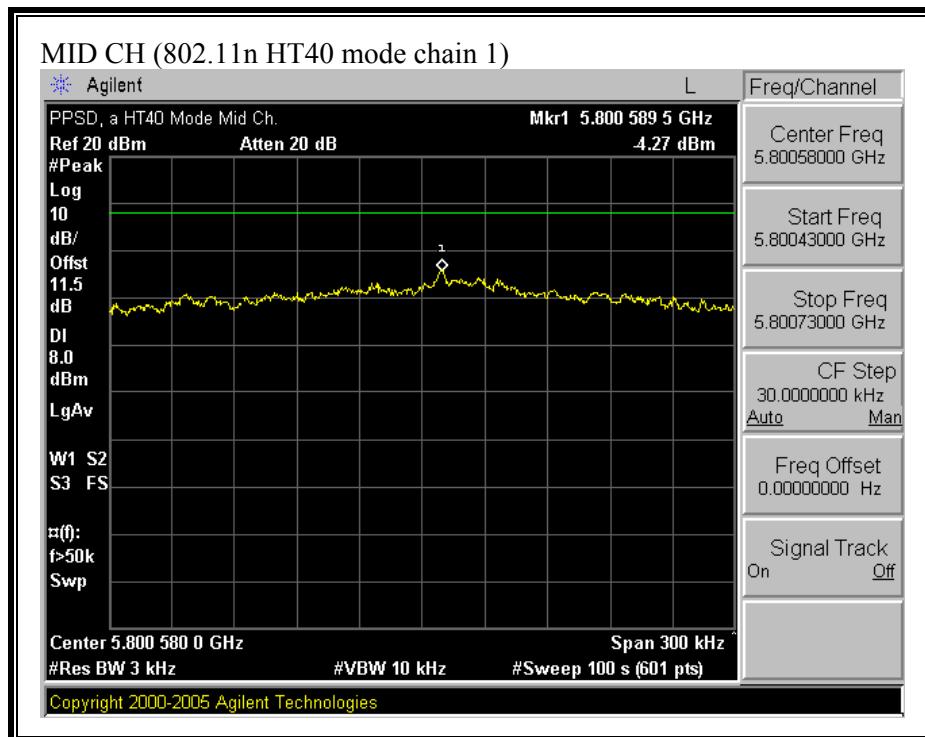


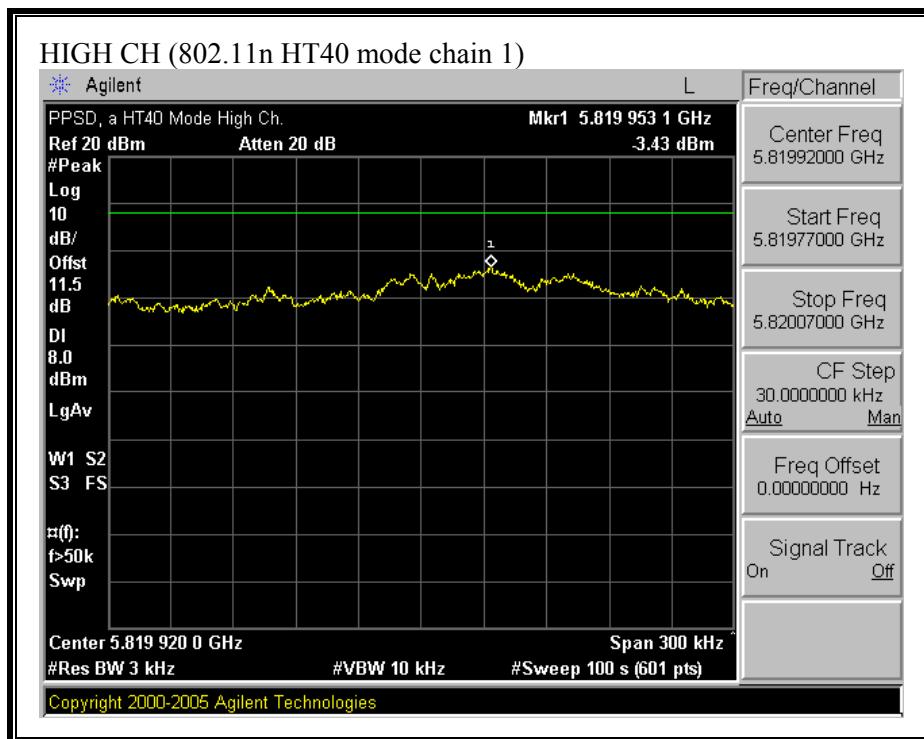


**(802.11 HT40 MODE CHAIN 2)**

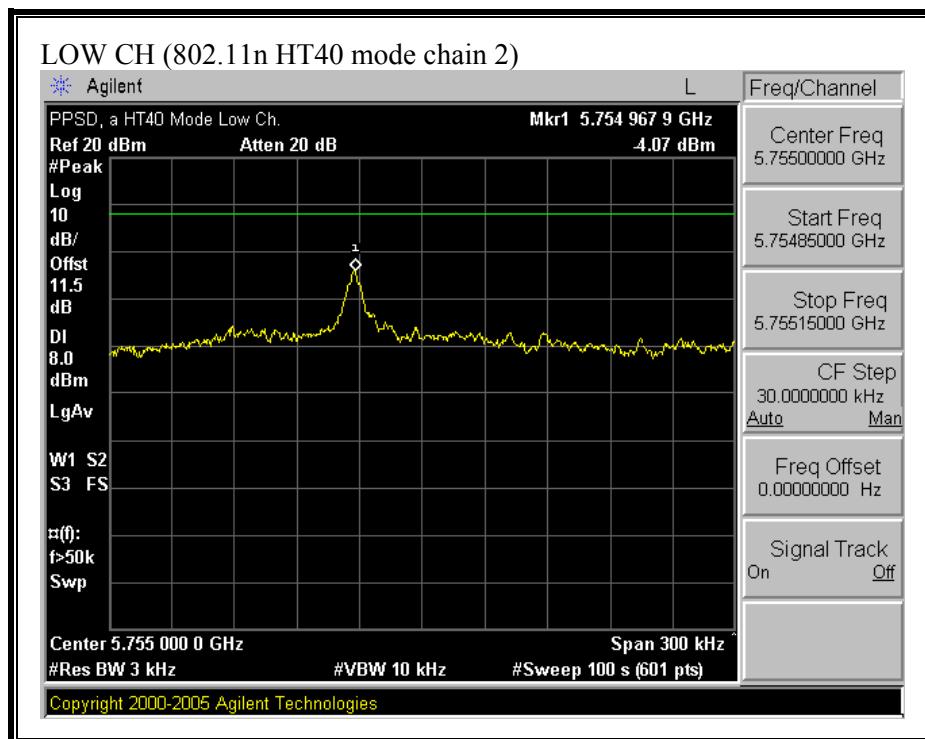


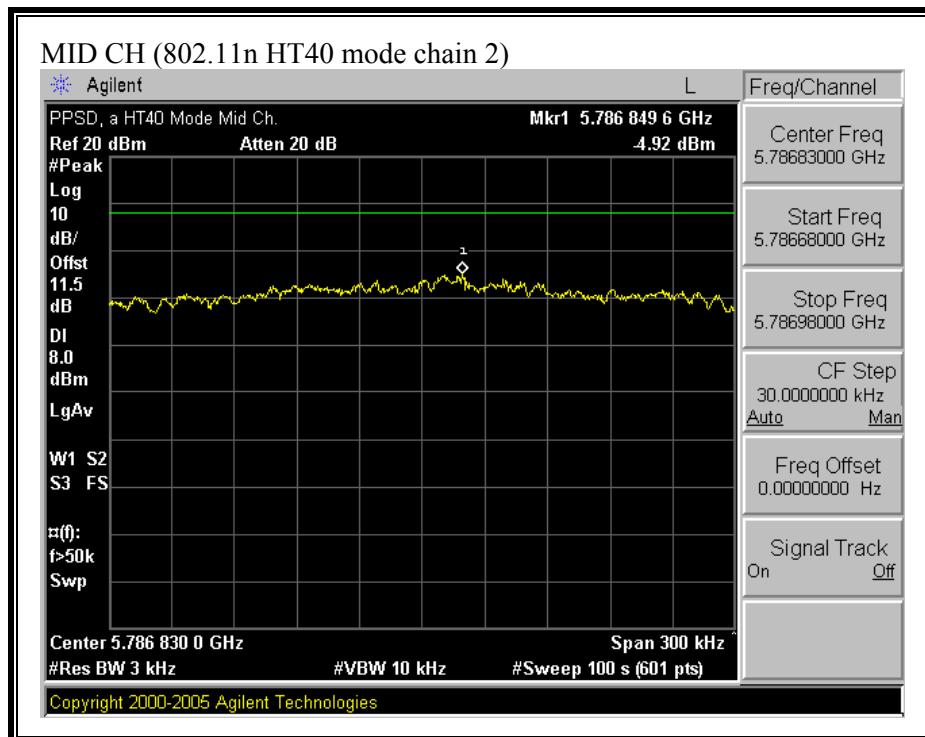


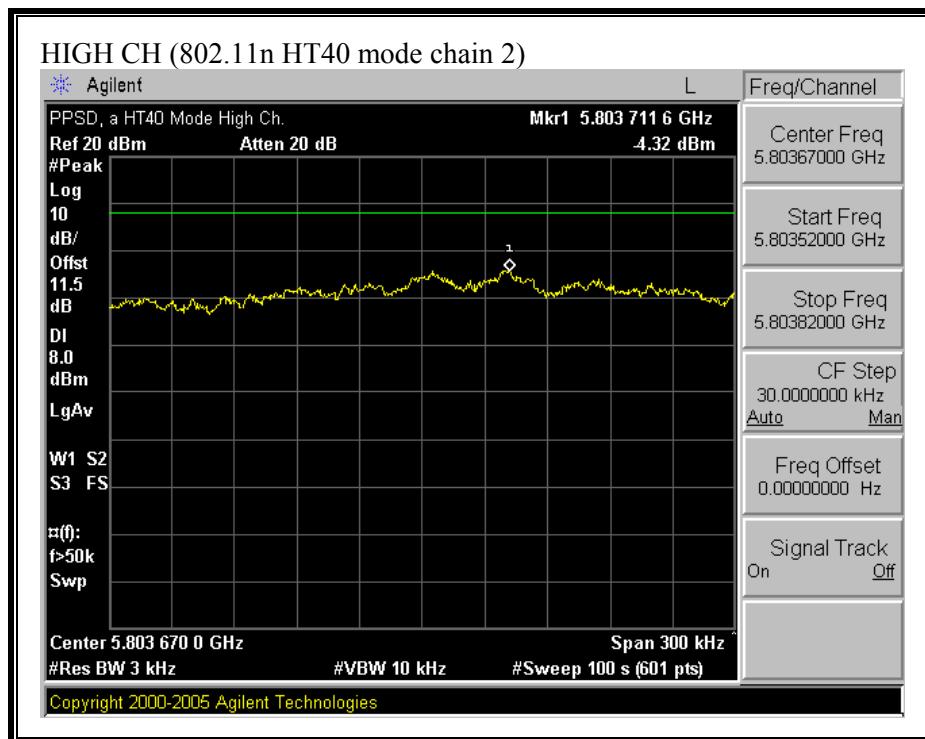


**COMBINED 802.11a MODE**

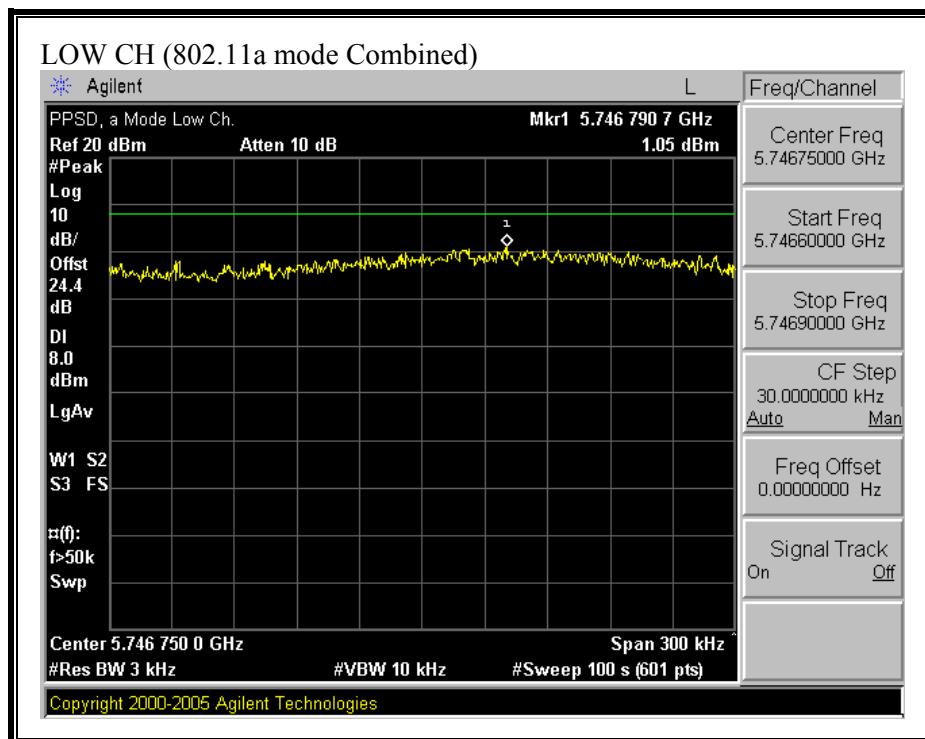


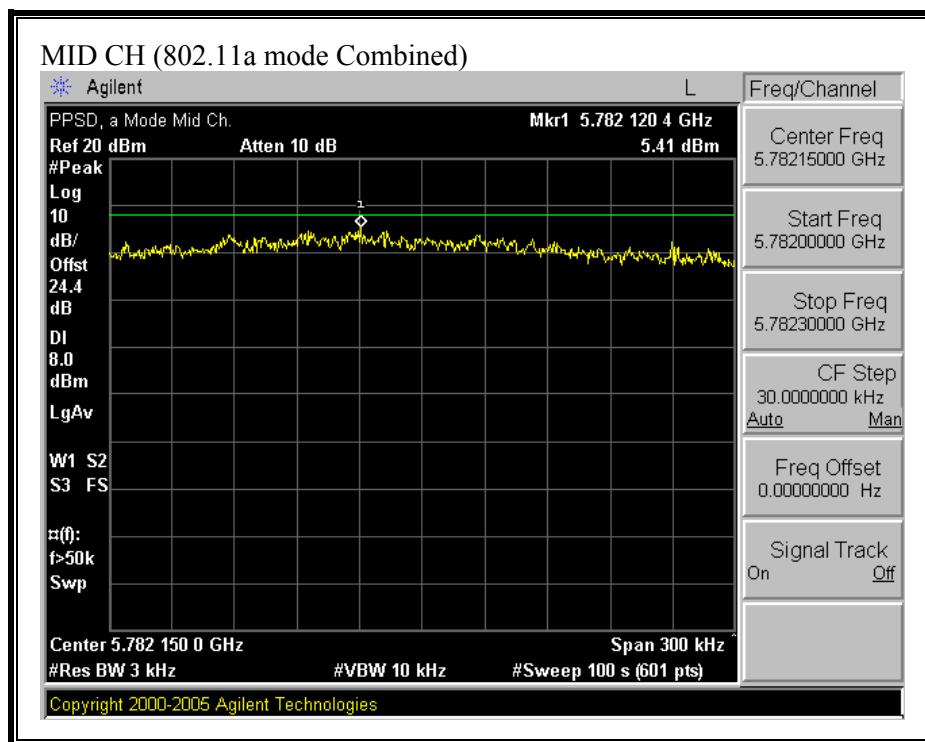


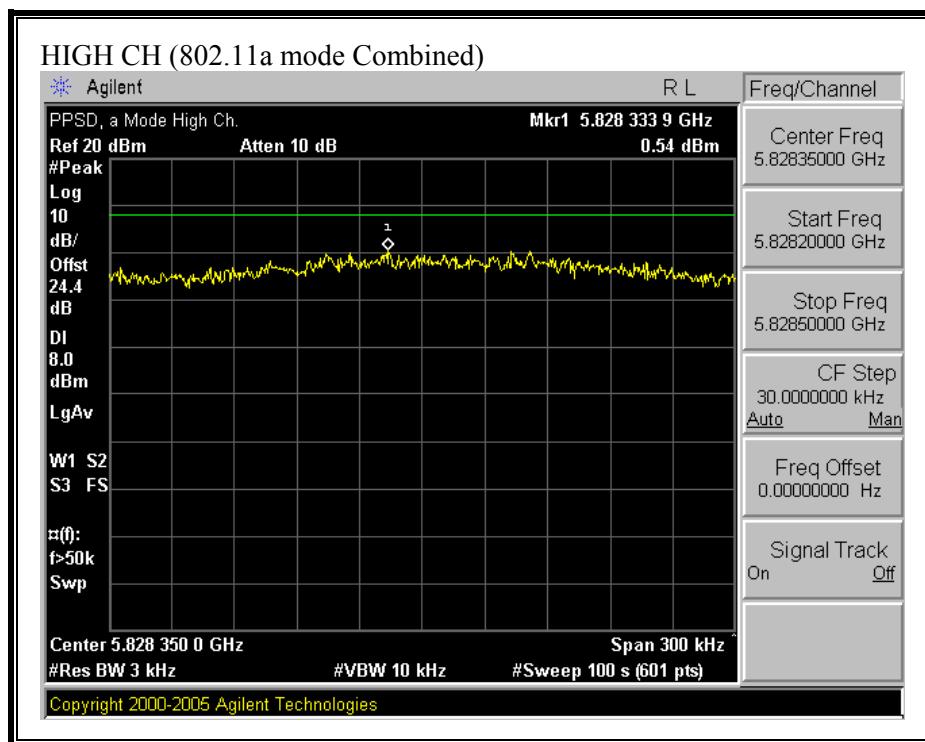


**COMBINED 802.11n HT20 MODE**

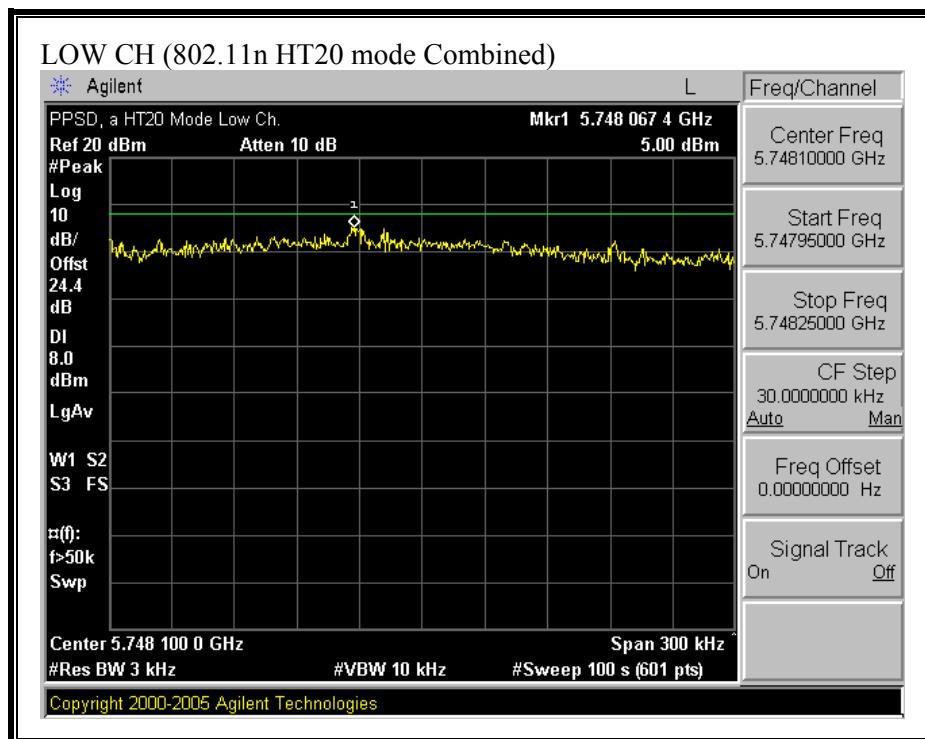


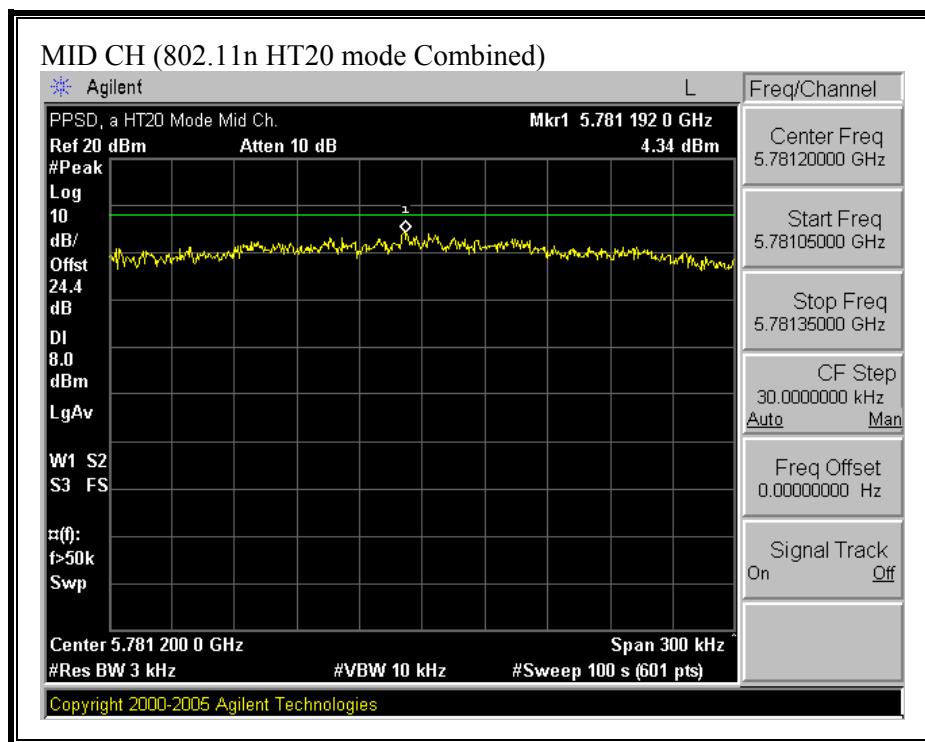


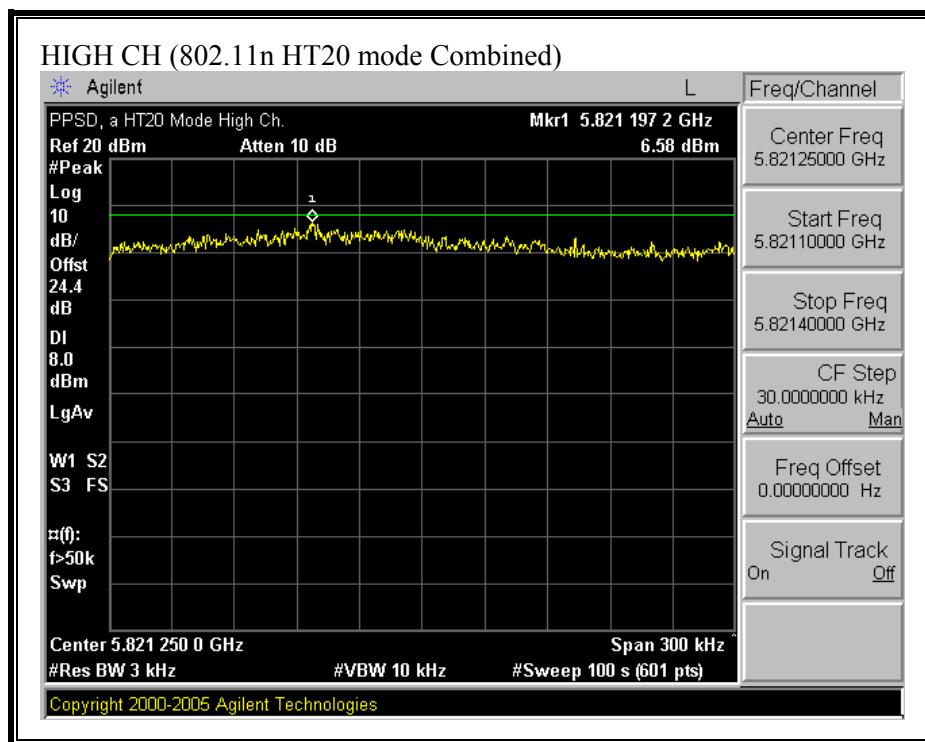

**COMBINED 802.11n HT40 MODE**

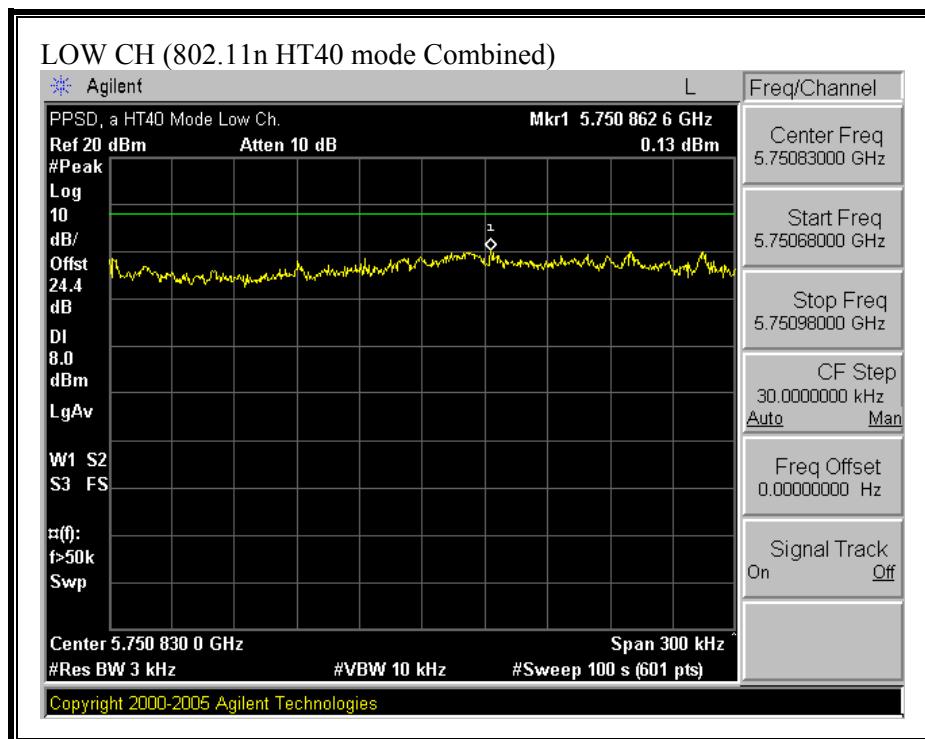

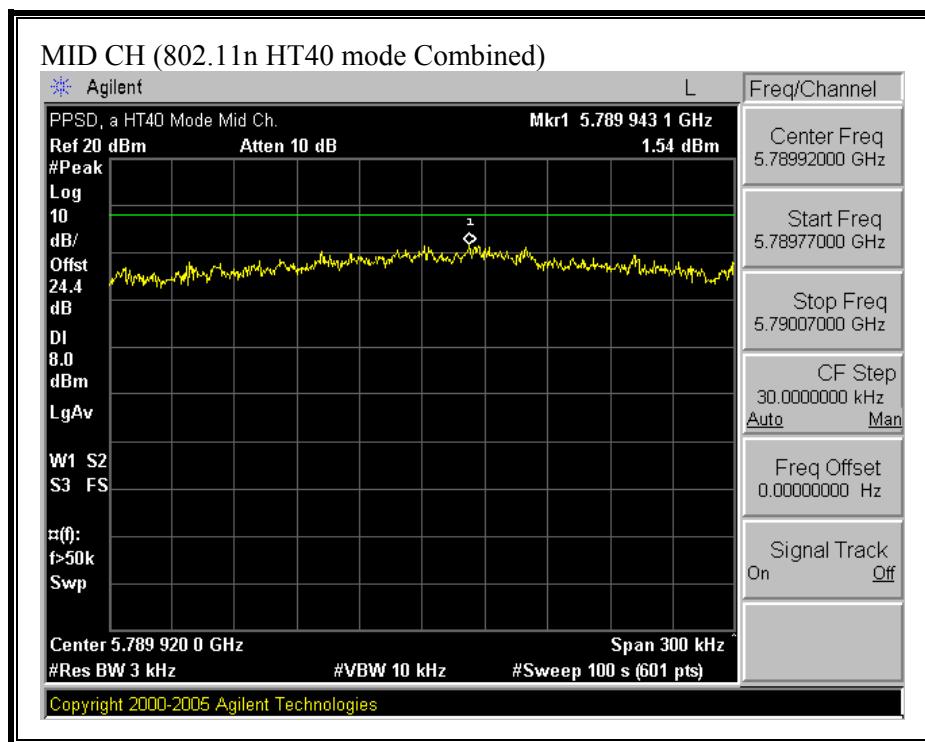

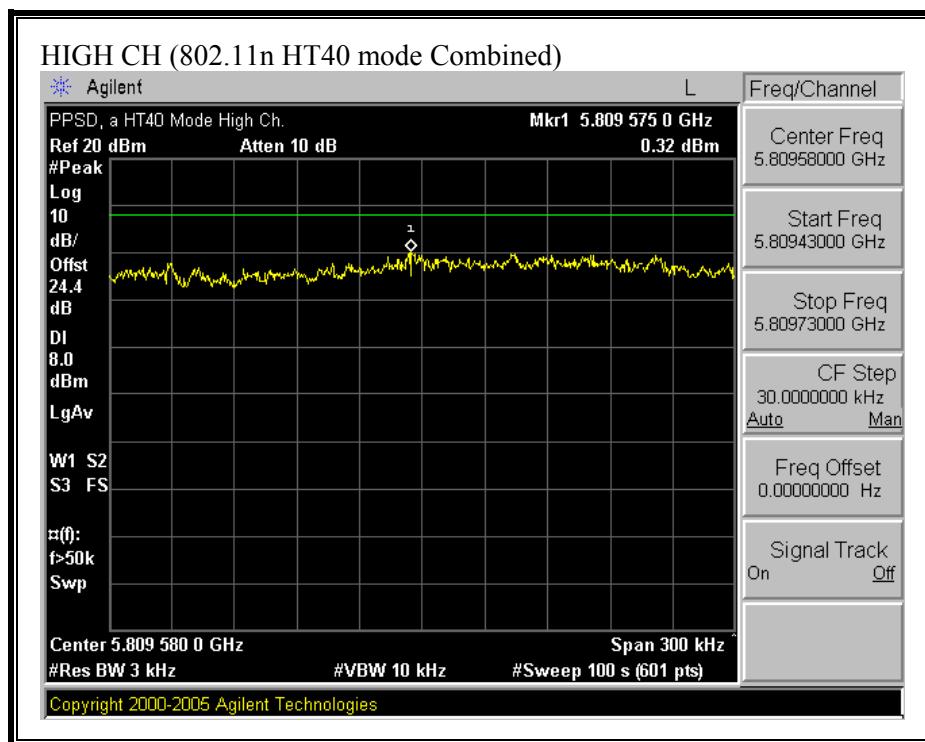

## 7.2.5. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS (802.11a MODE CHAIN 0)**

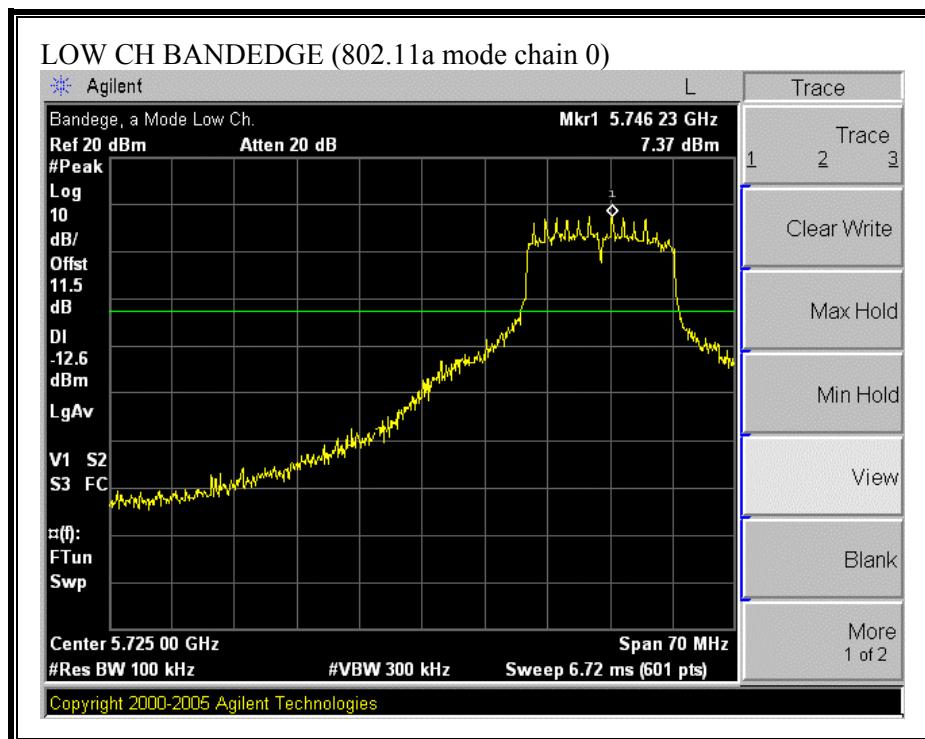


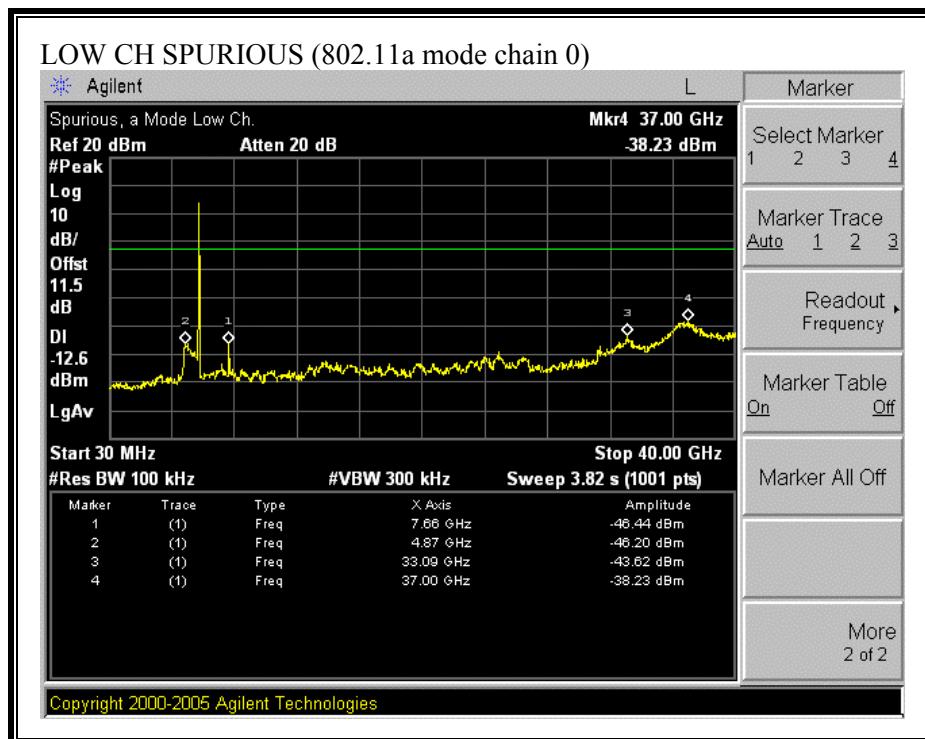

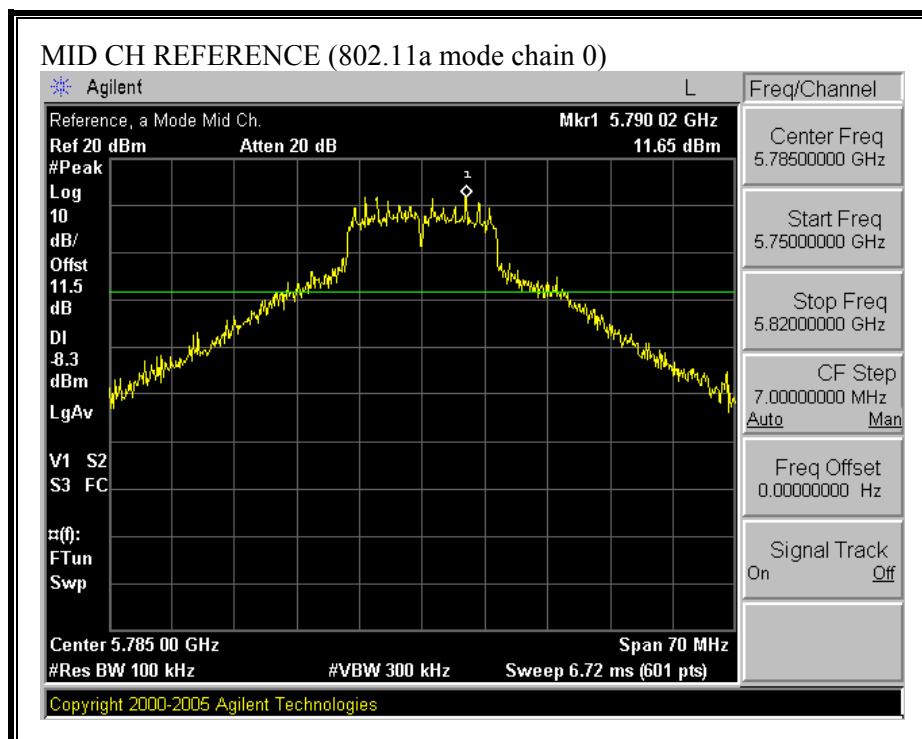


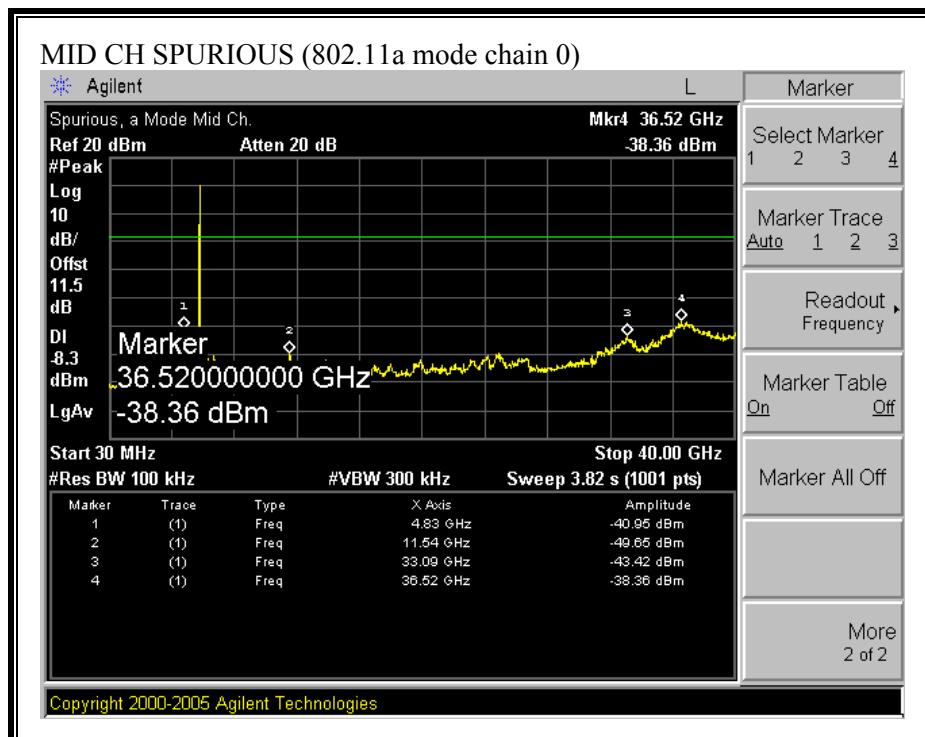


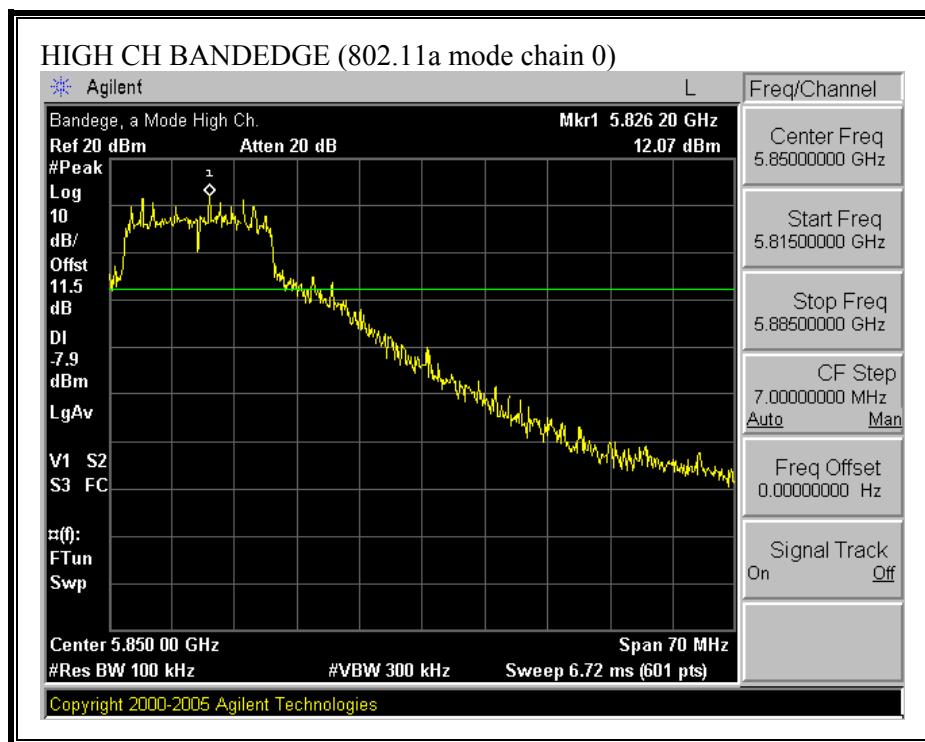


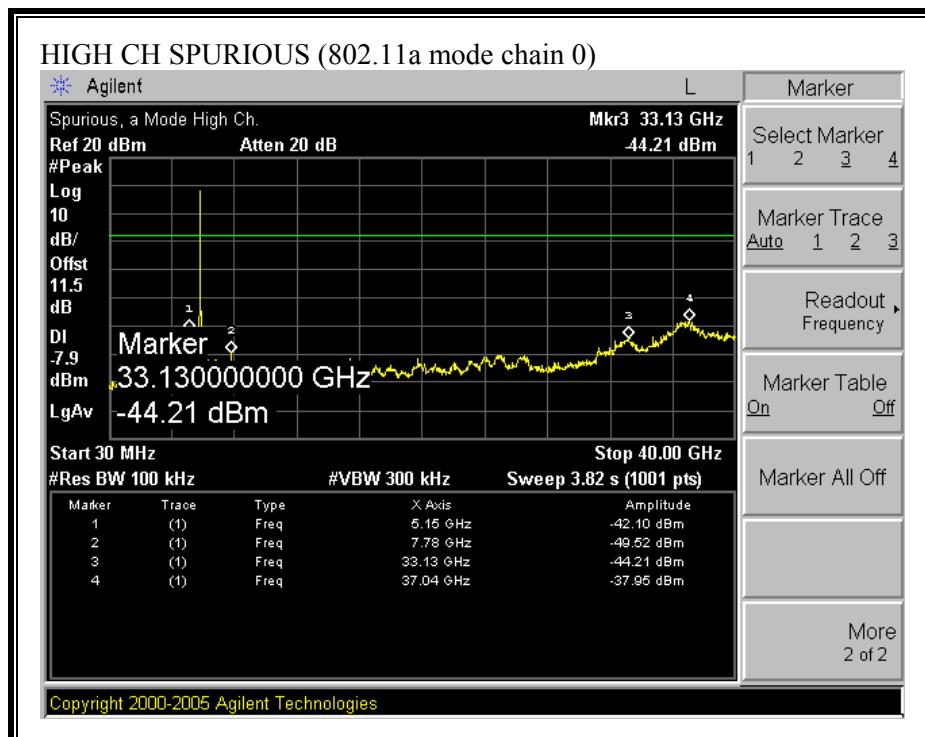



**SPURIOUS EMISSIONS (802.11a MODE CHAIN 1)**

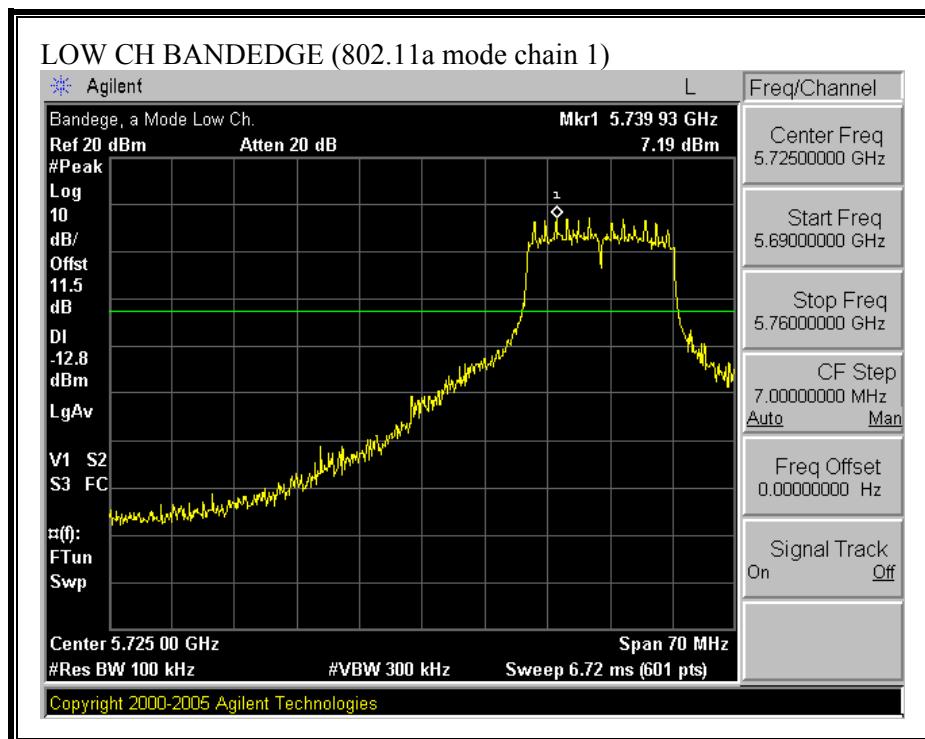


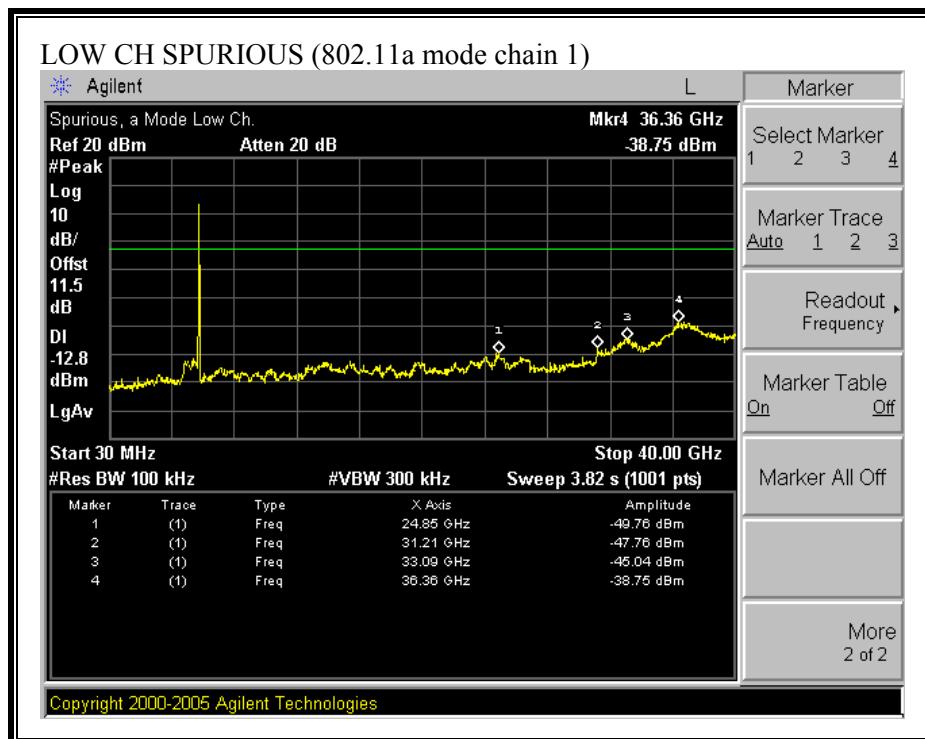

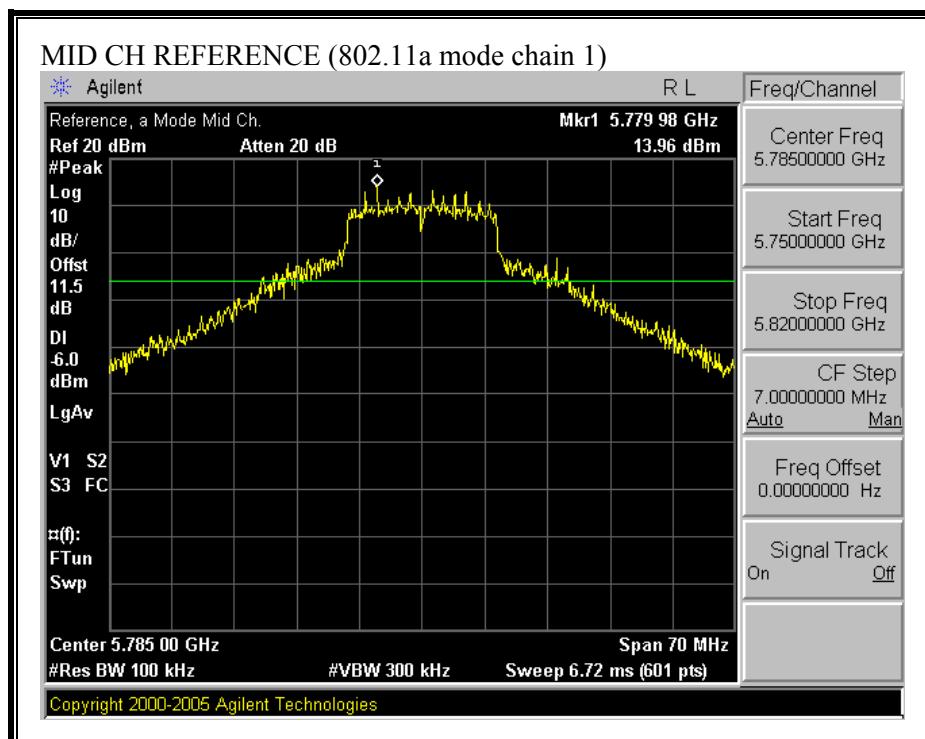


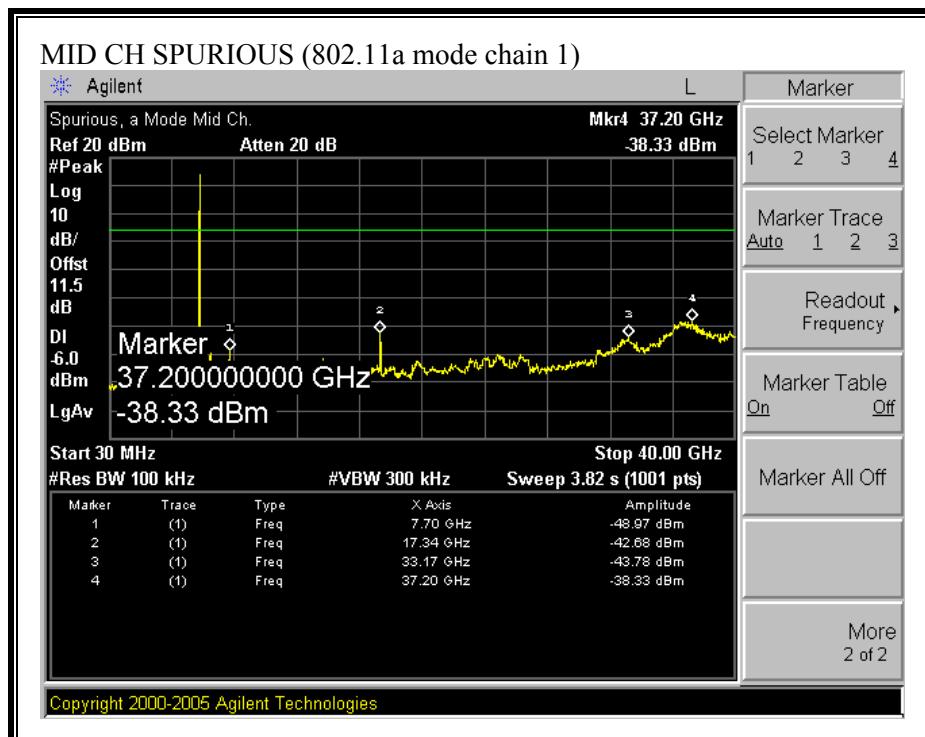


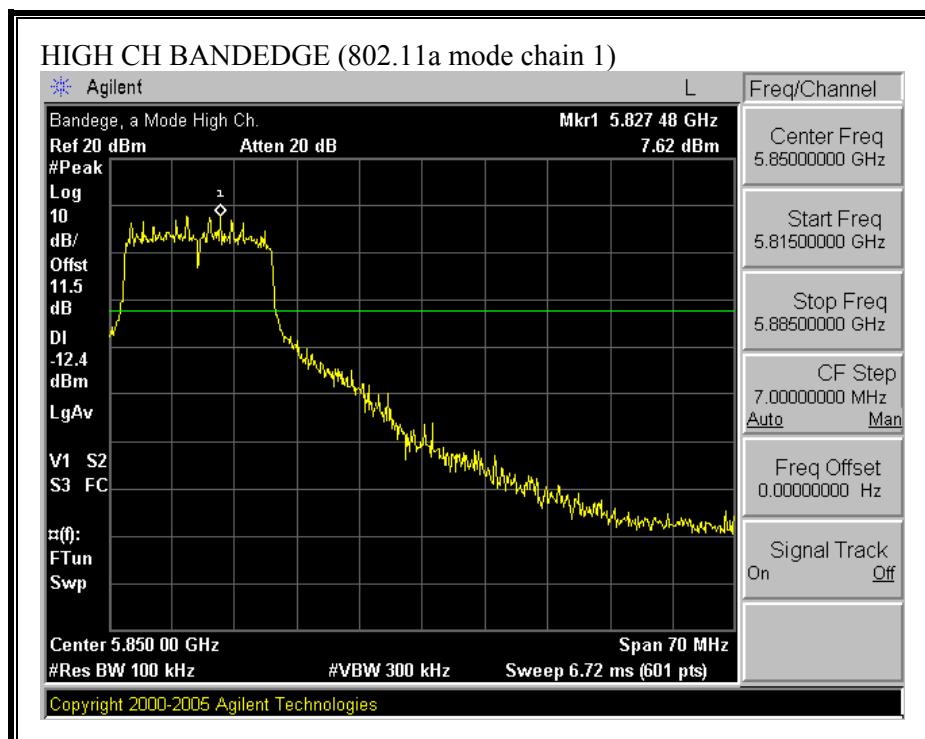


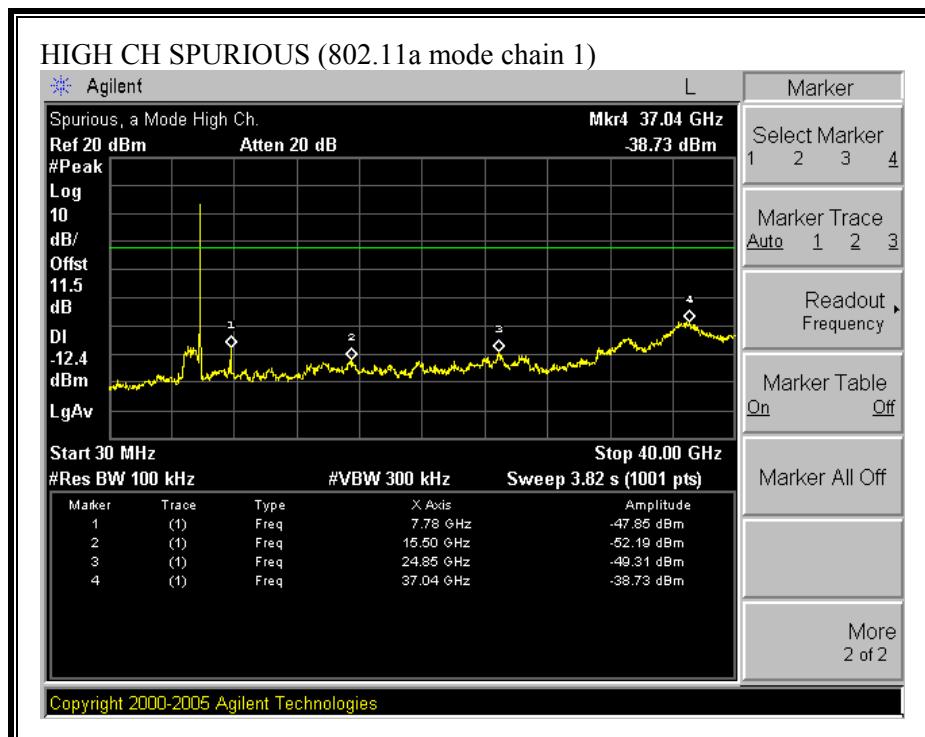



**SPURIOUS EMISSIONS (802.11a MODE CHAIN 2)**

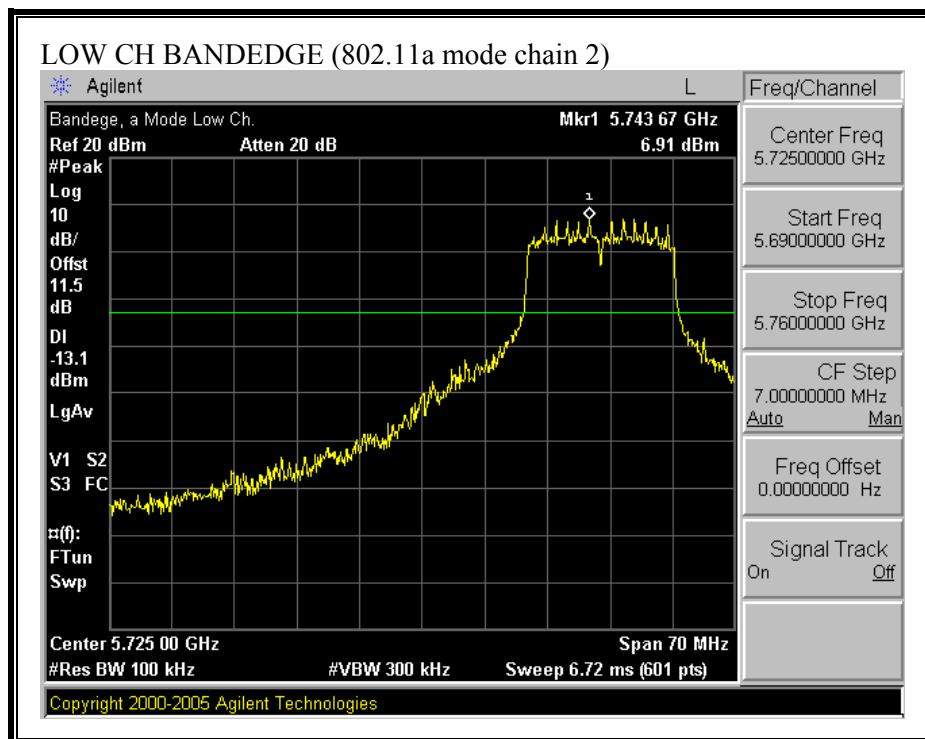


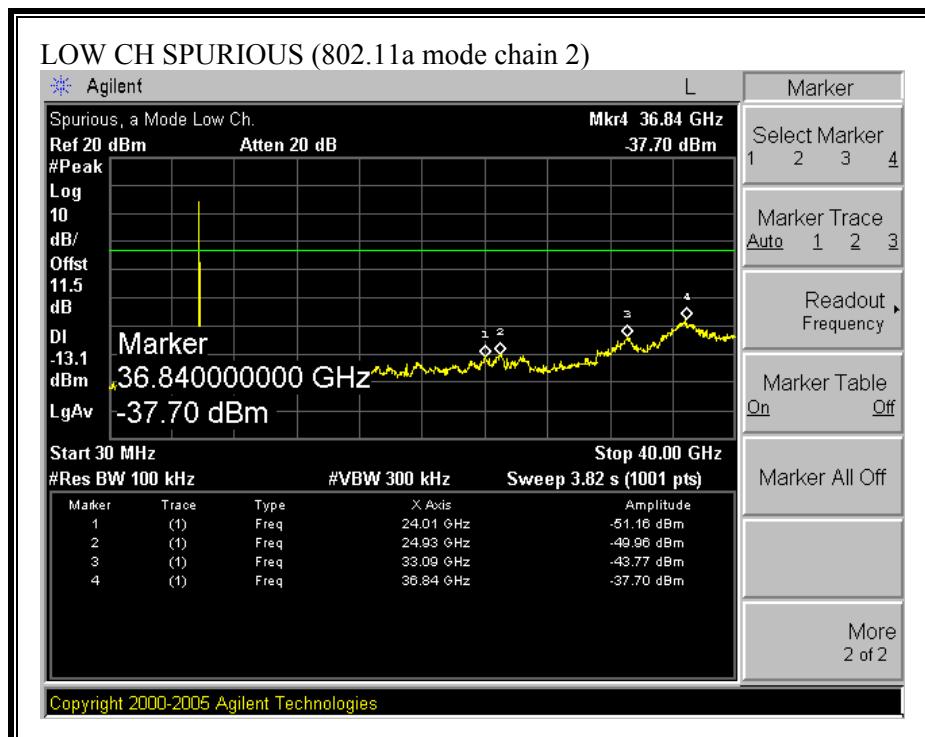

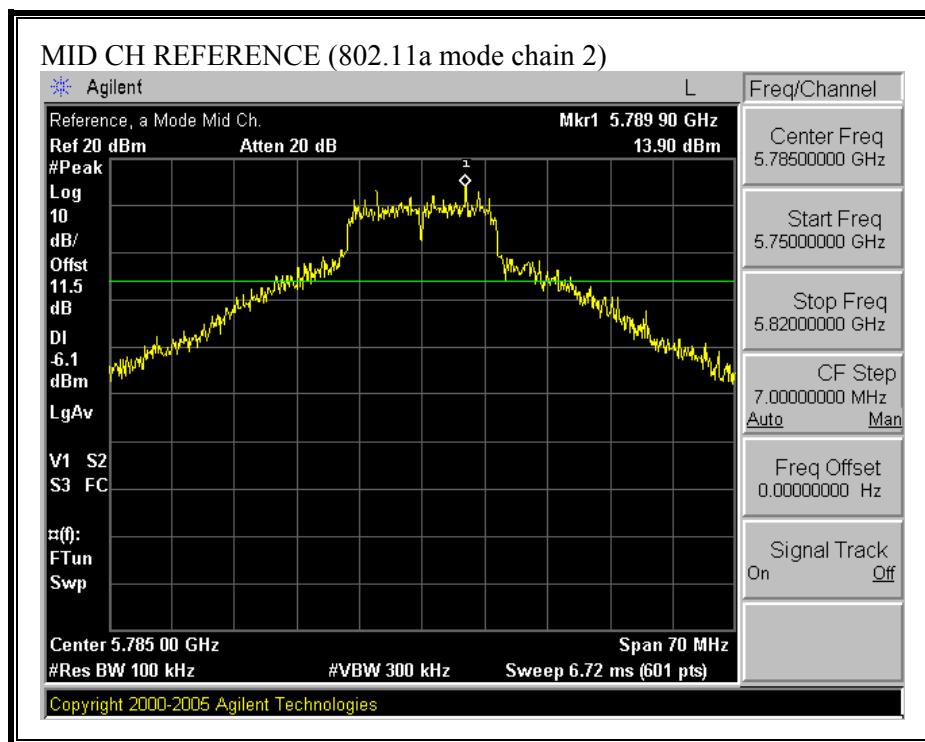


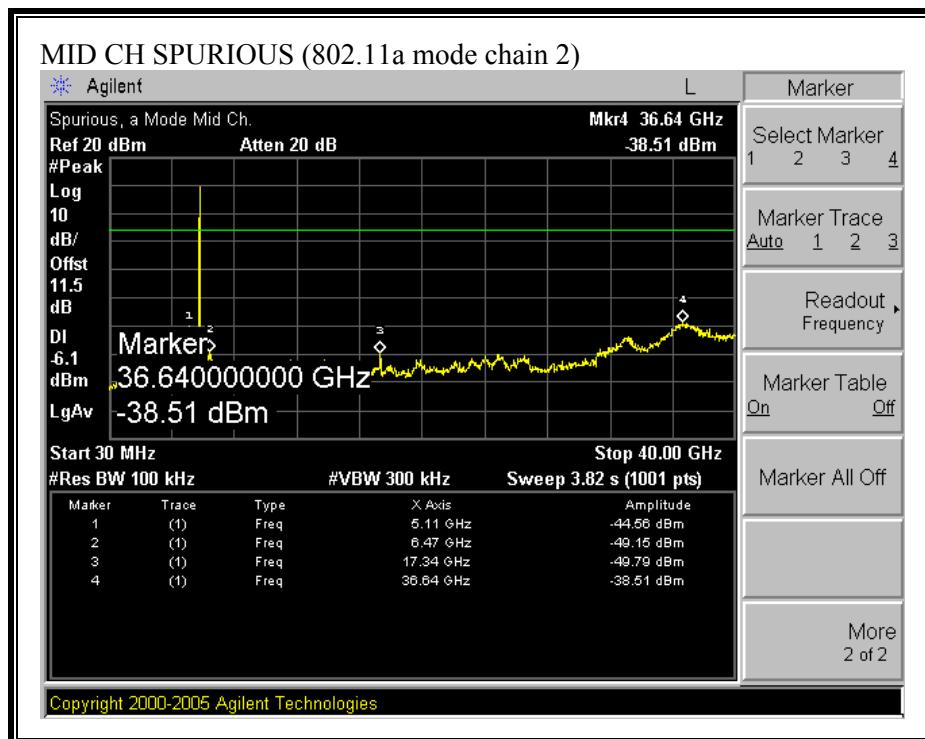


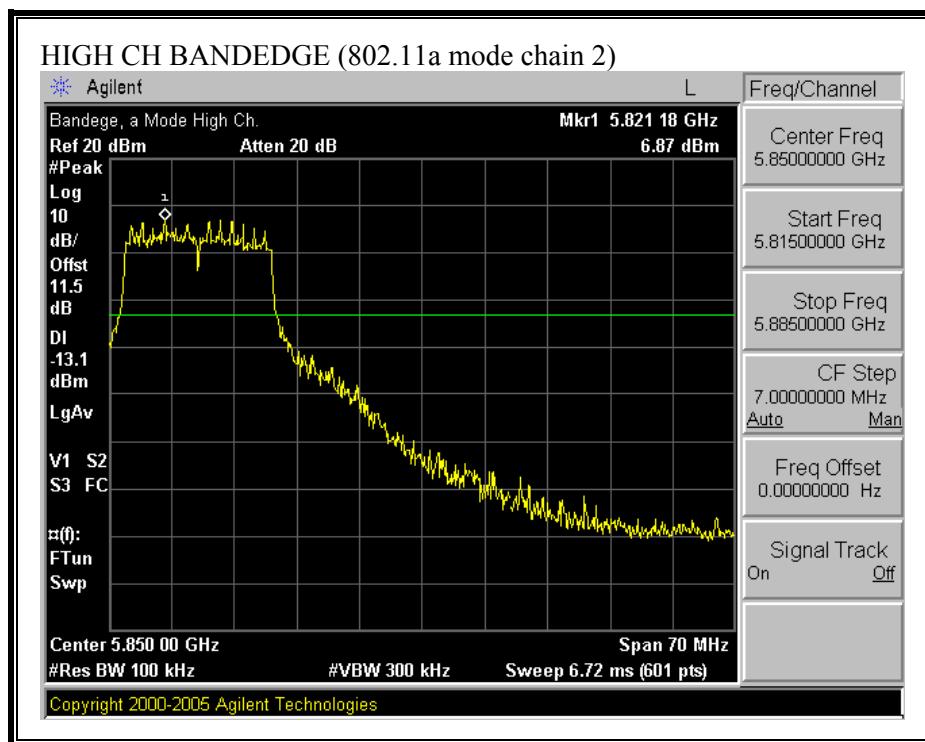


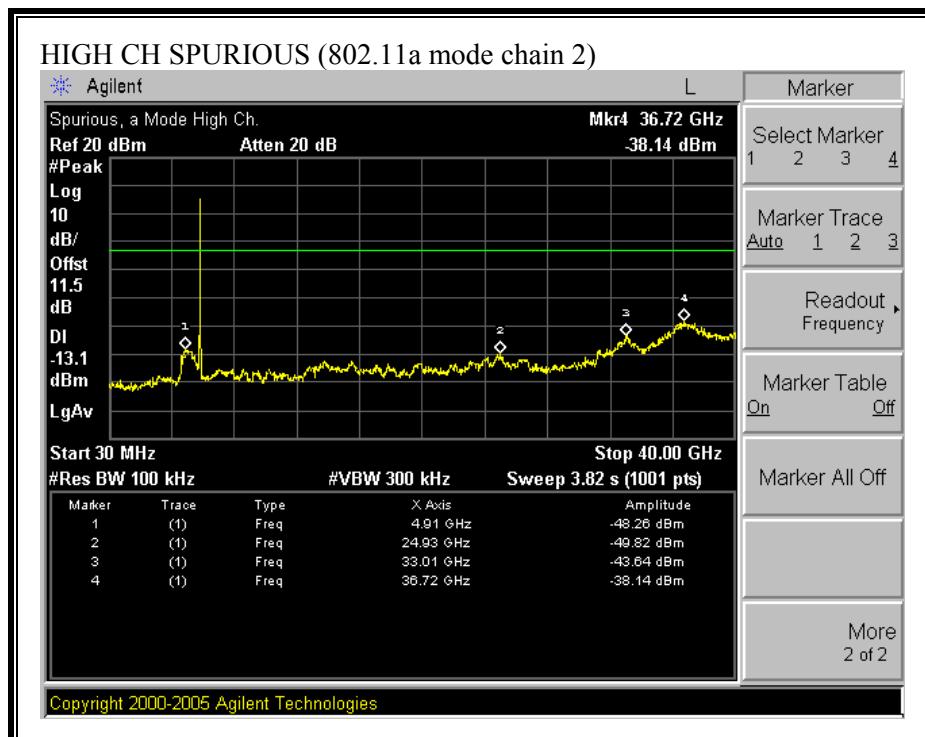



**SPURIOUS EMISSIONS (802.11n HT20 MODE CHAIN 0)**

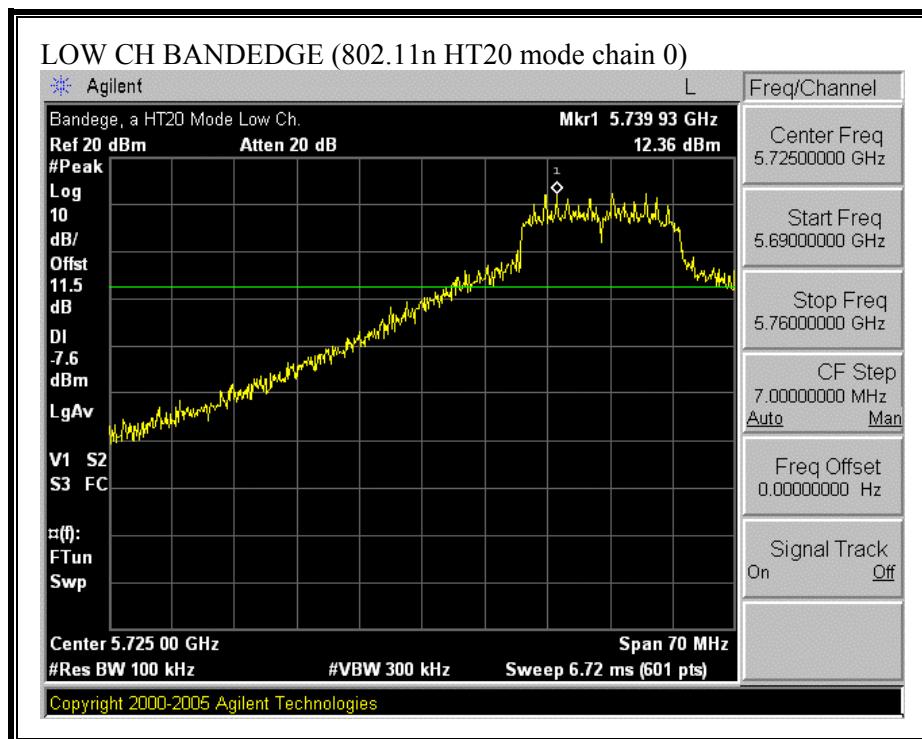


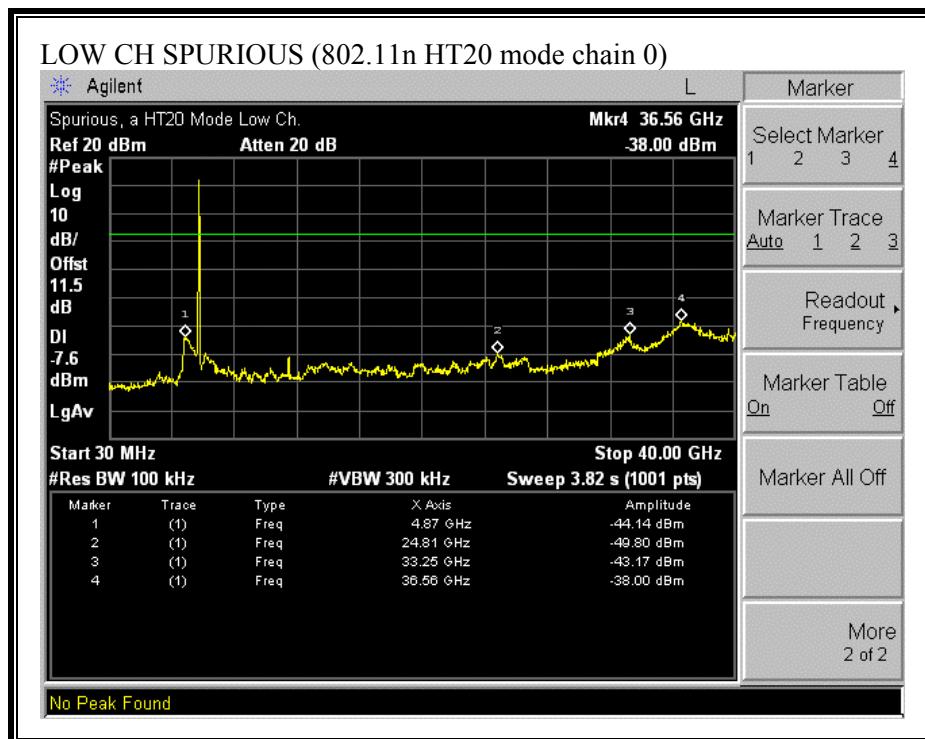

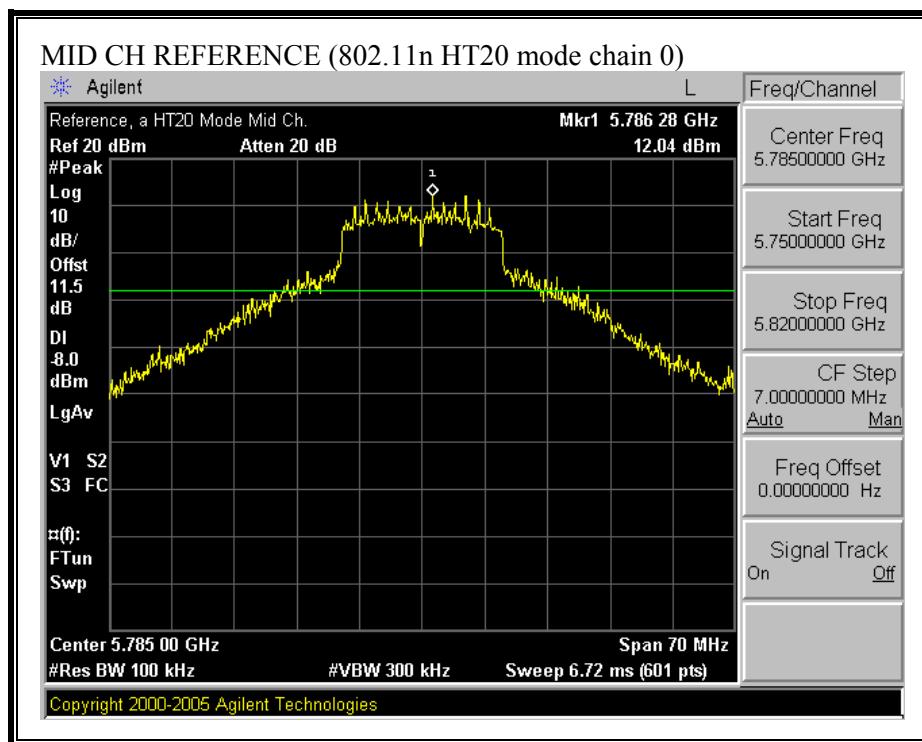


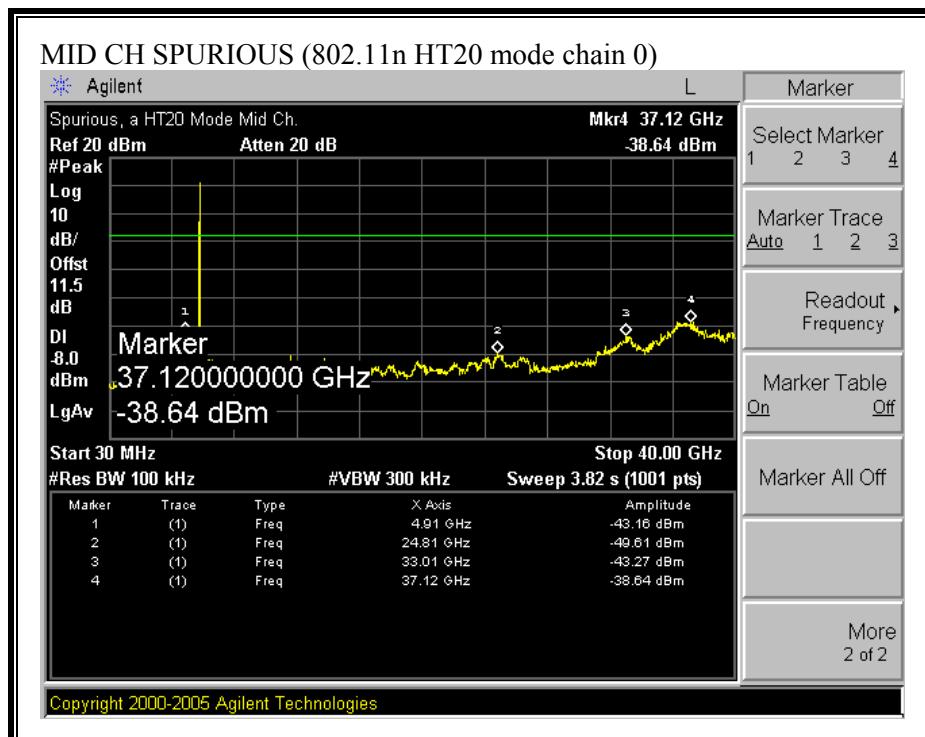


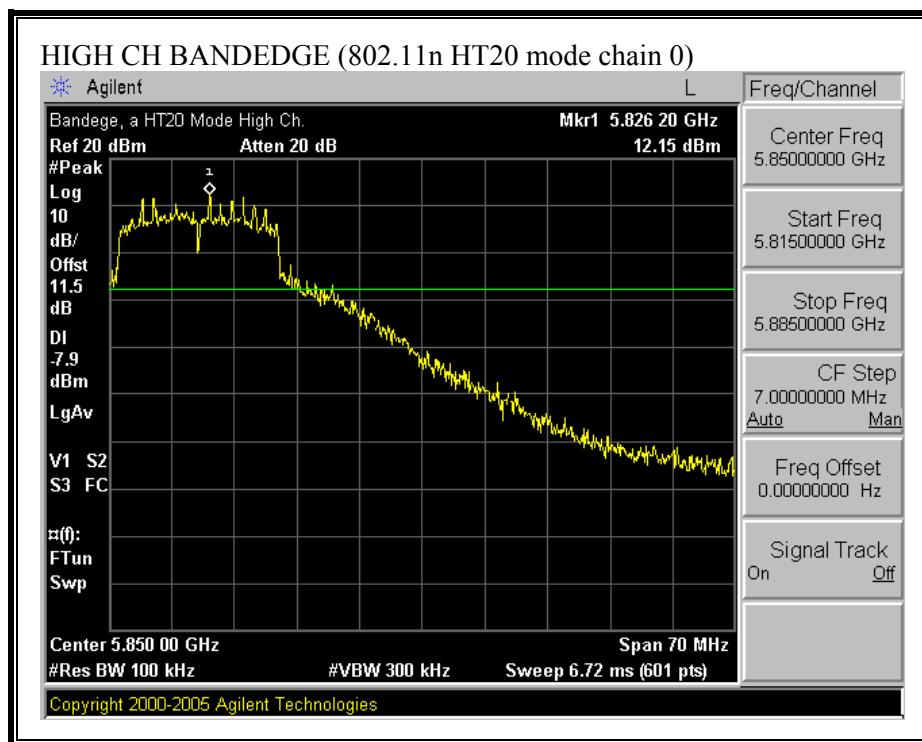


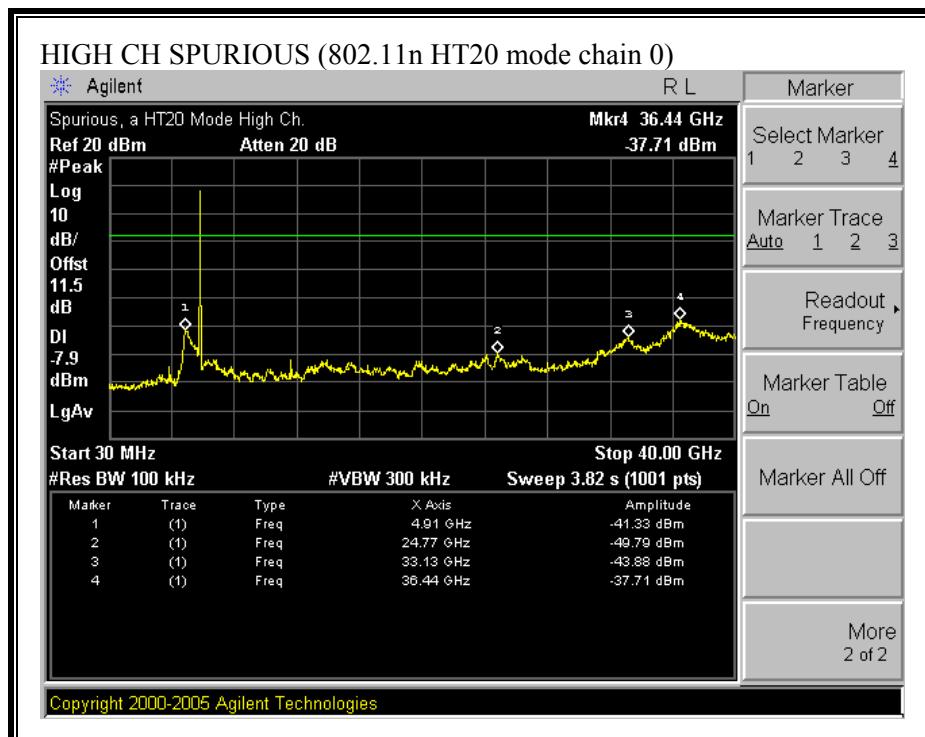



**SPURIOUS EMISSIONS (802.11n HT20 MODE CHAIN 1)**

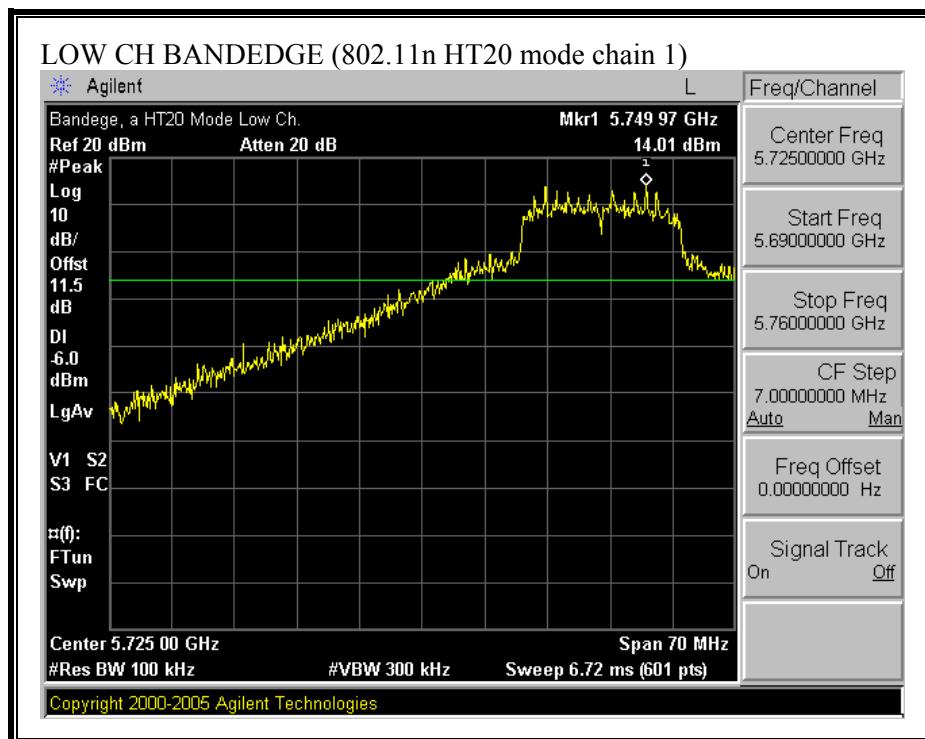


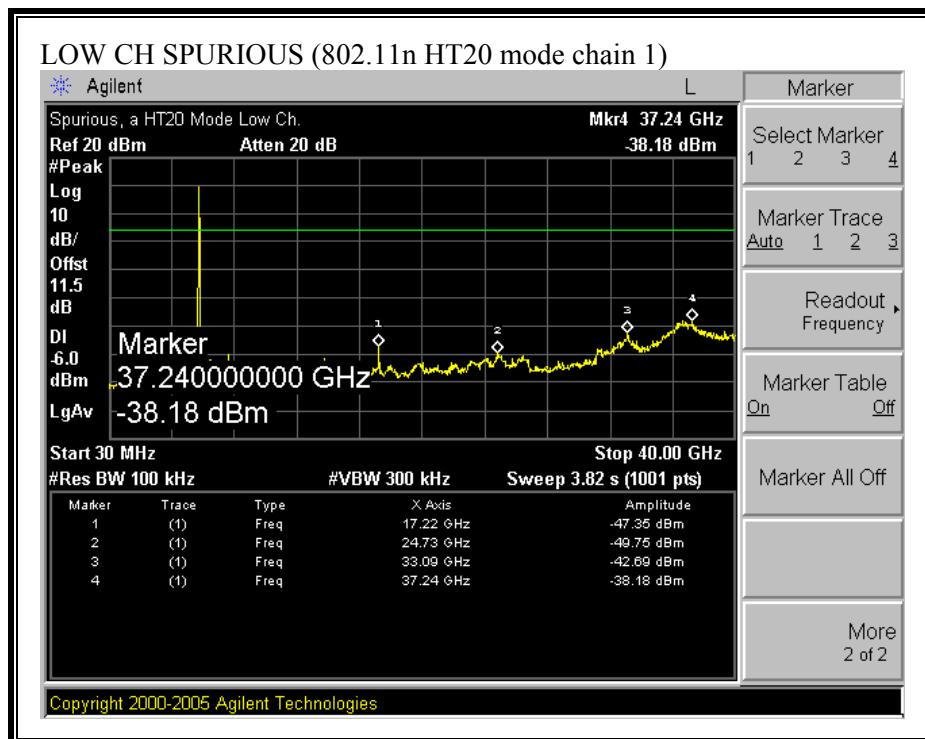

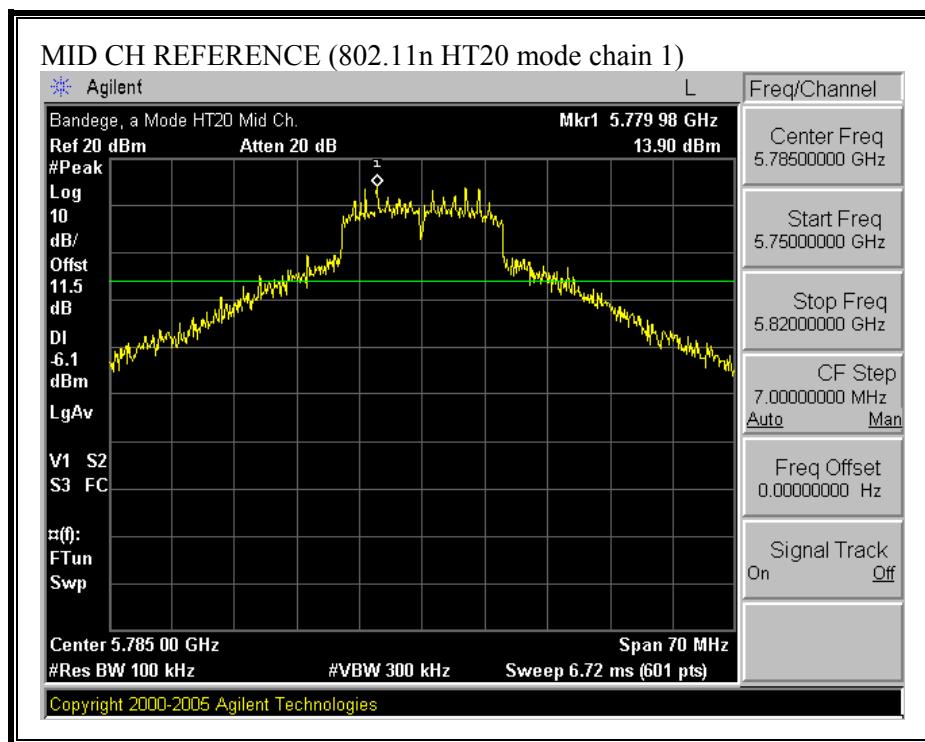


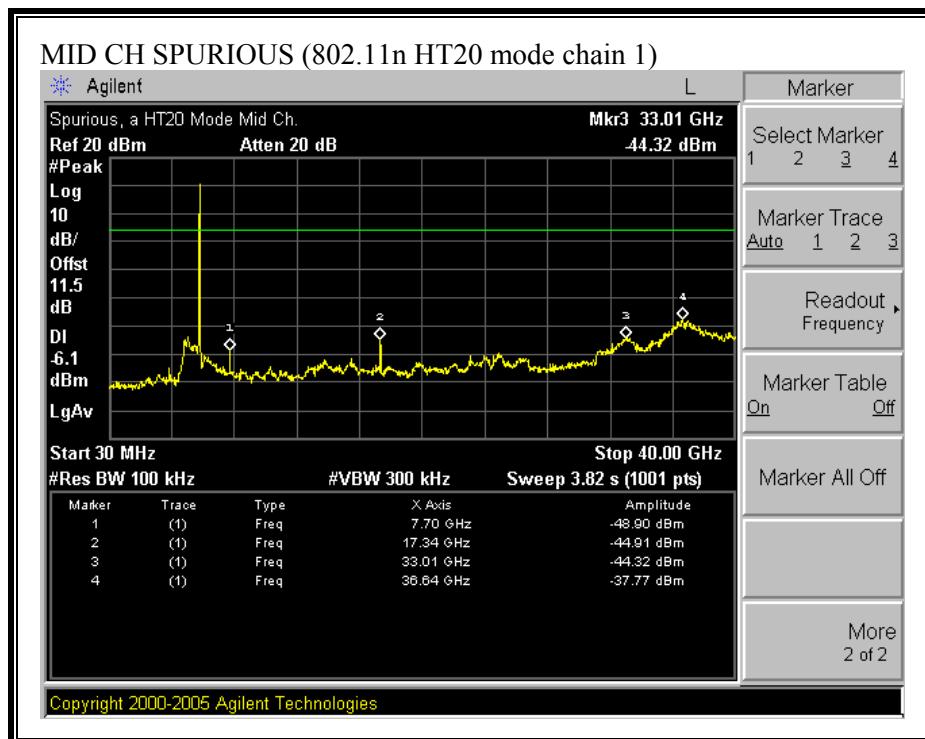


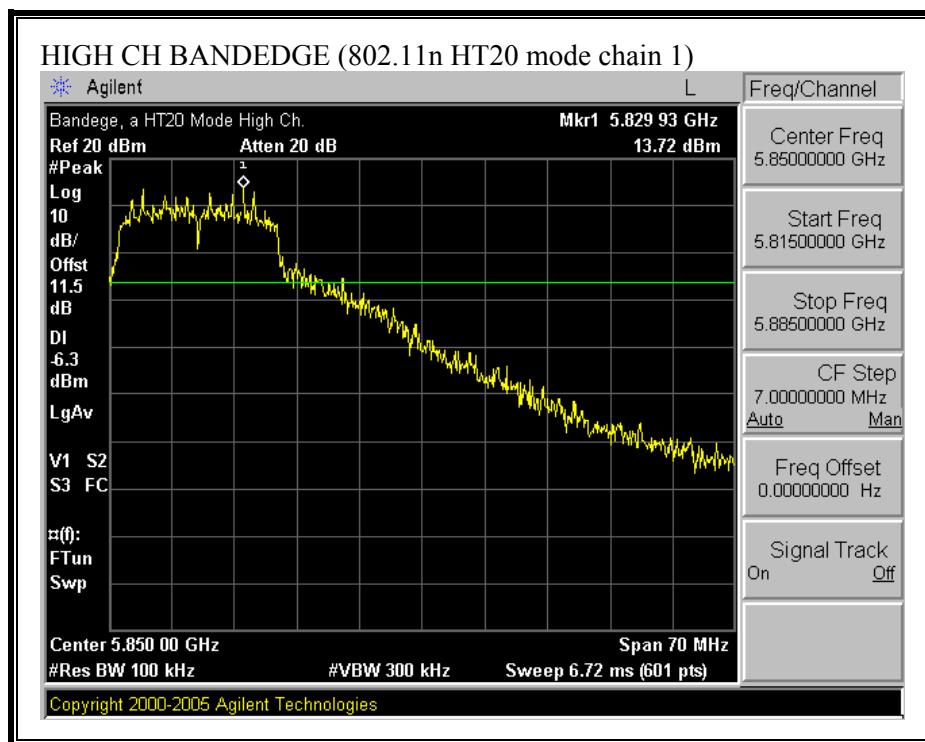


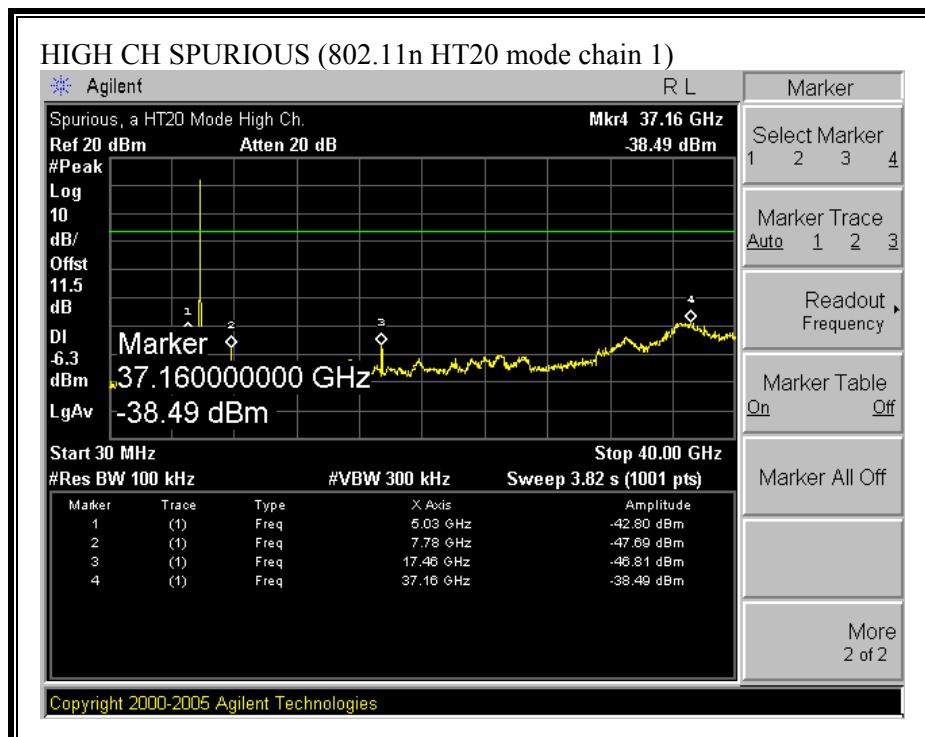



**SPURIOUS EMISSIONS (802.11 HT20 MODE CHAIN 2)**

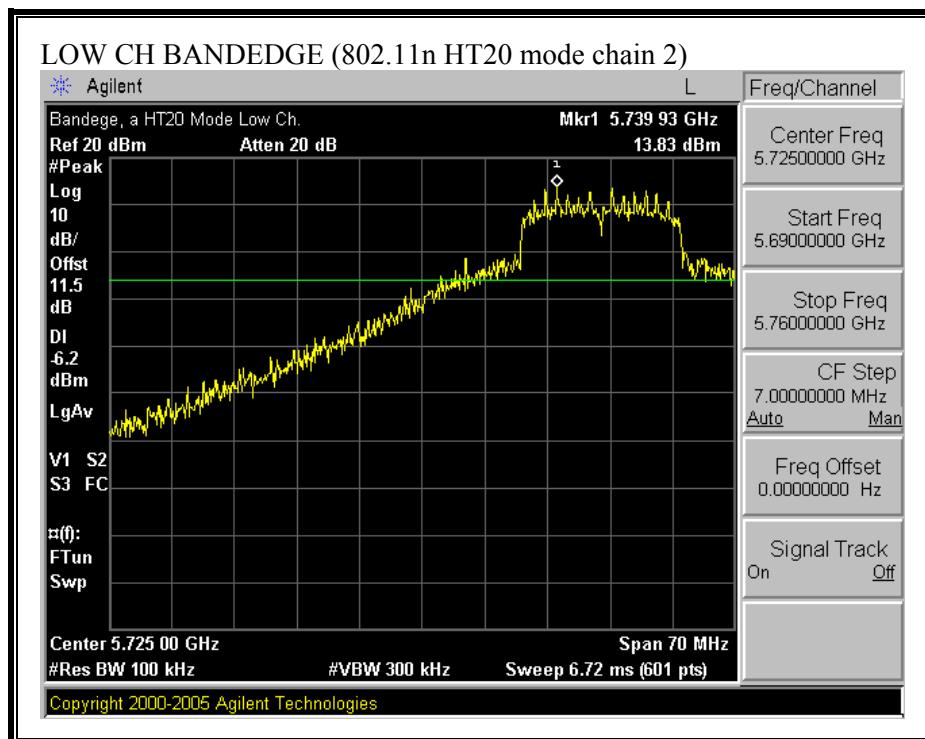


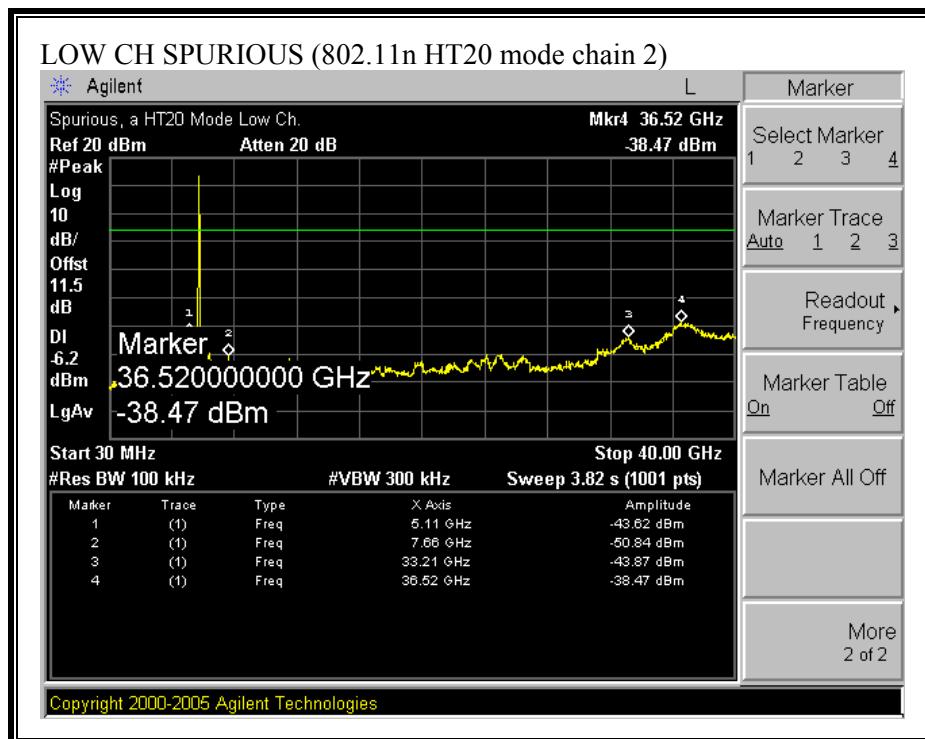

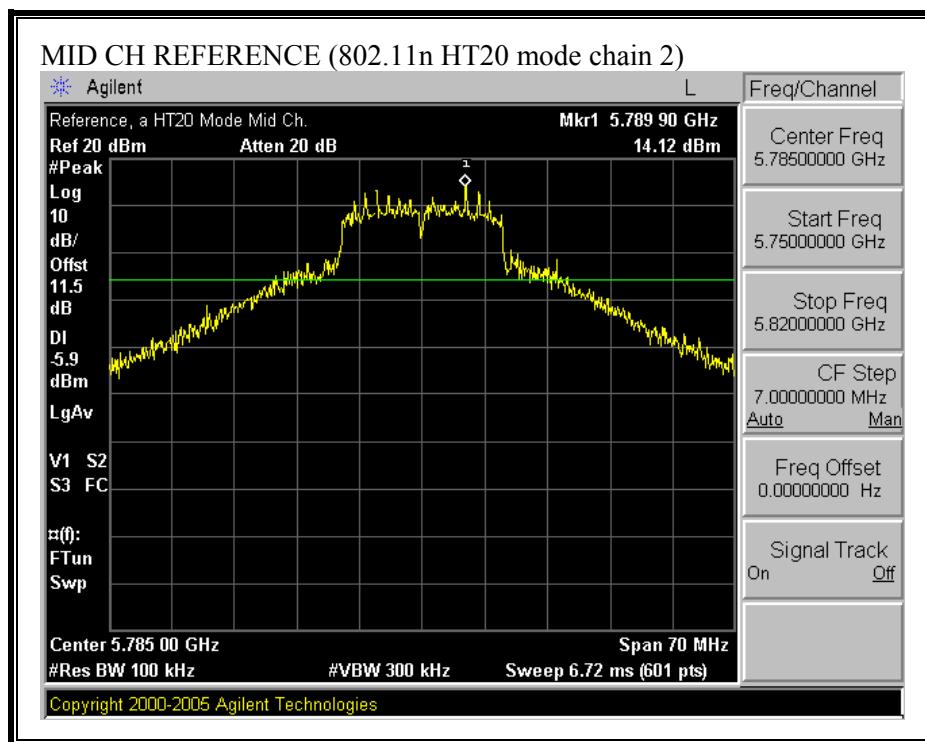


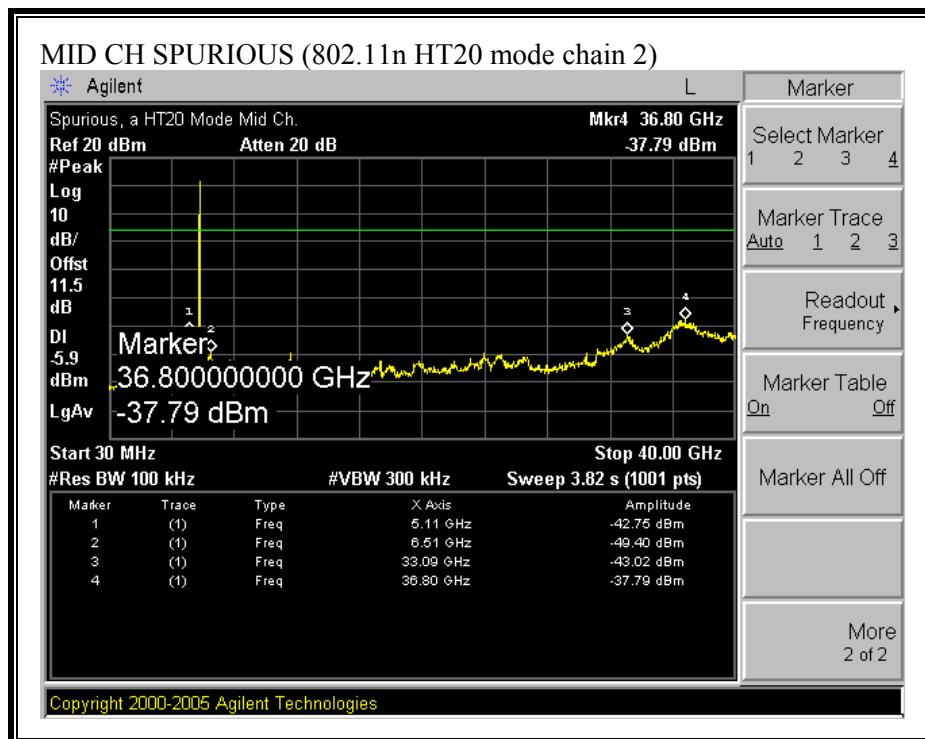


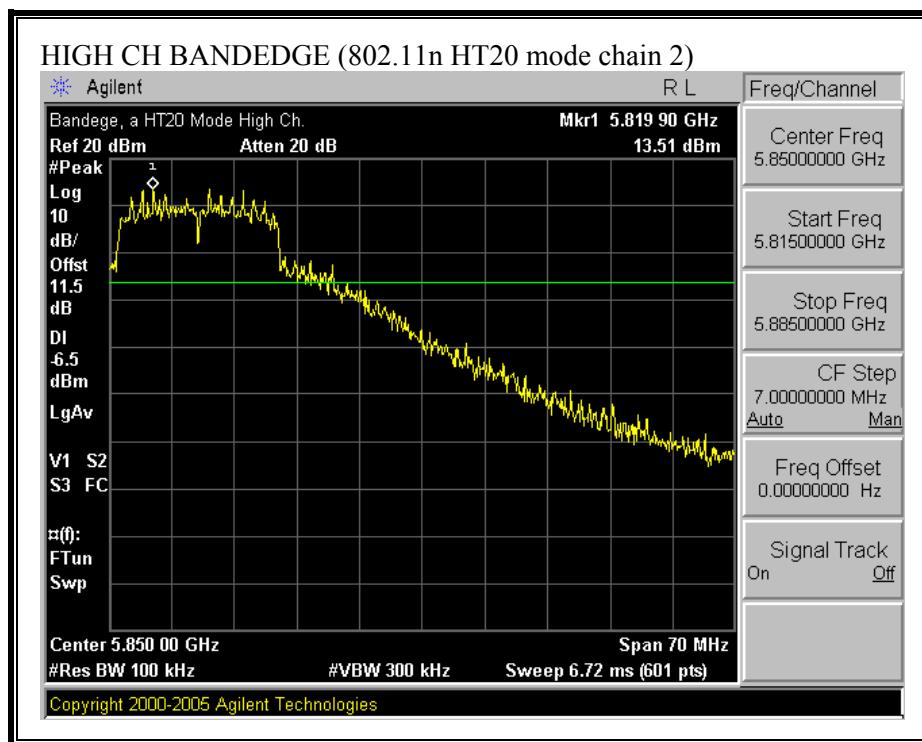


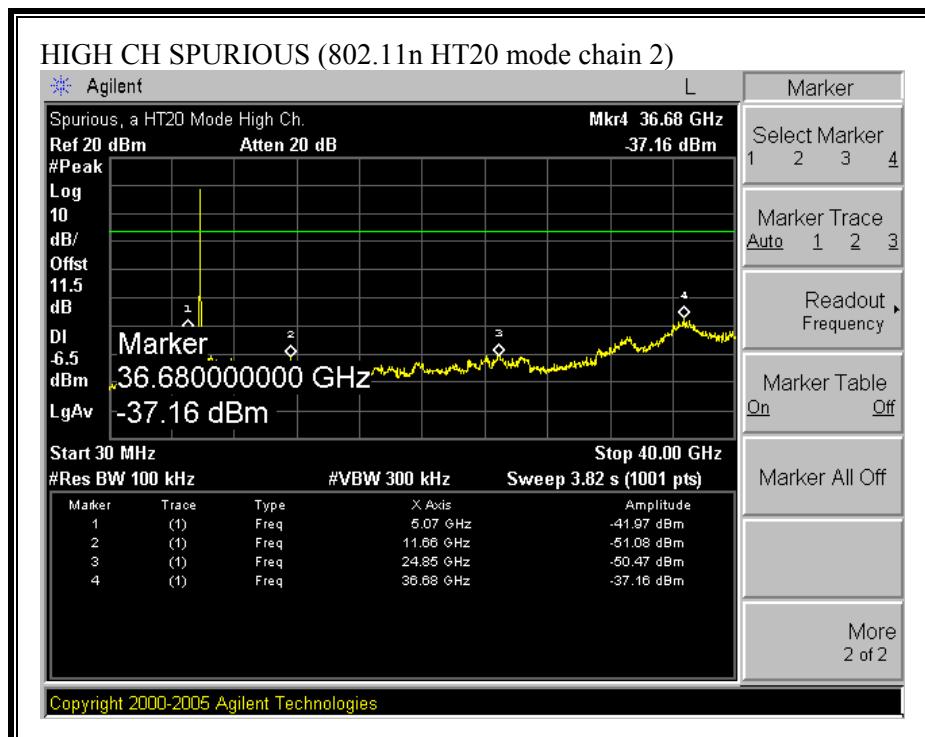



**SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN 0)**

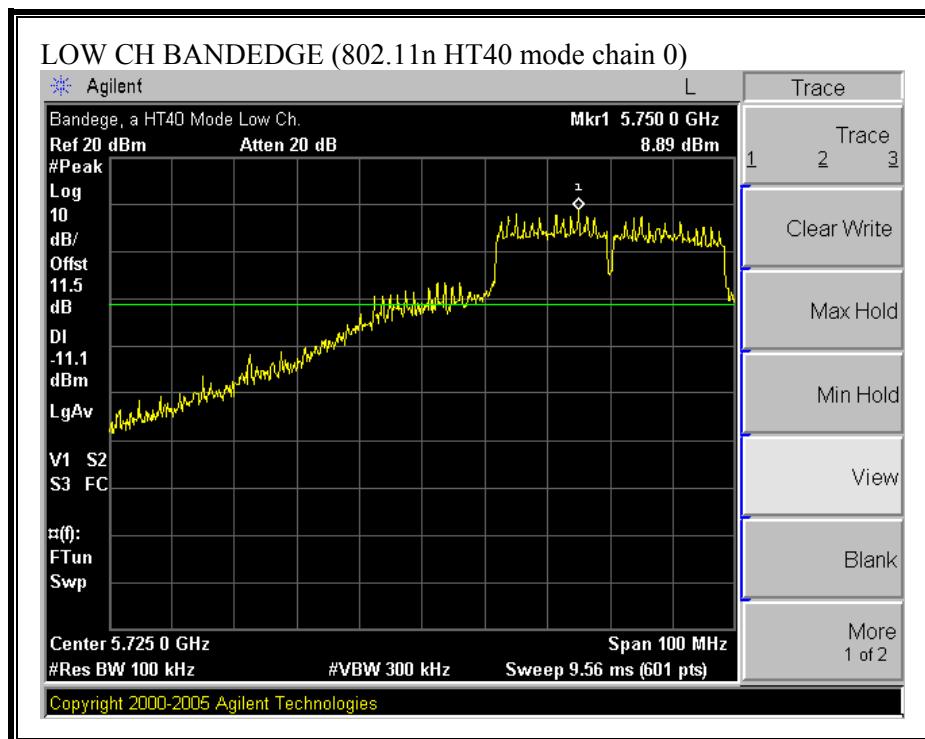


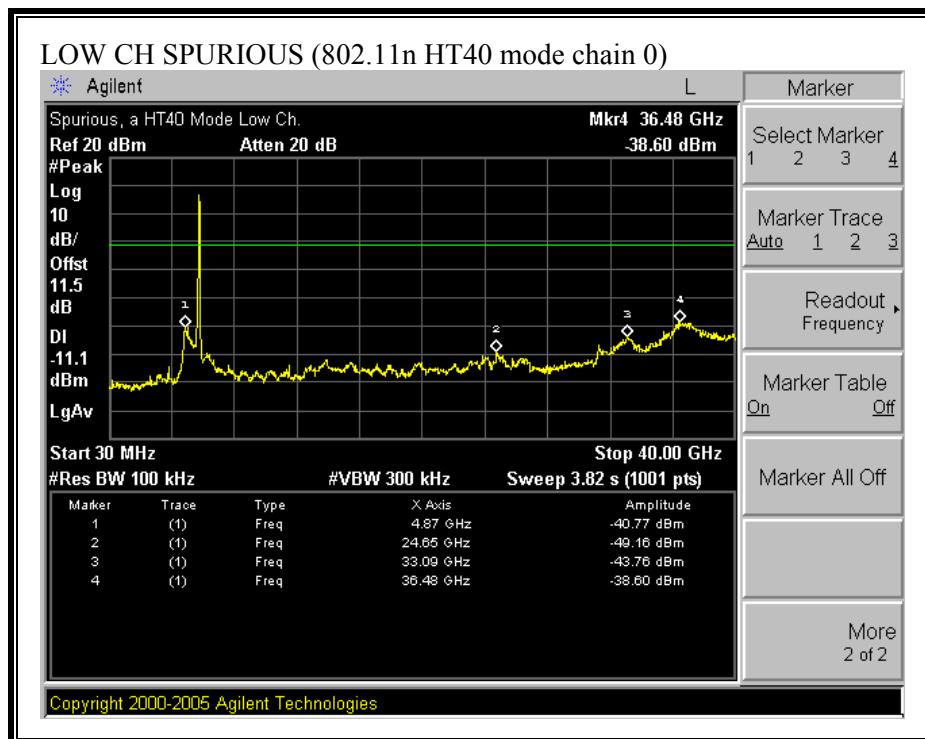

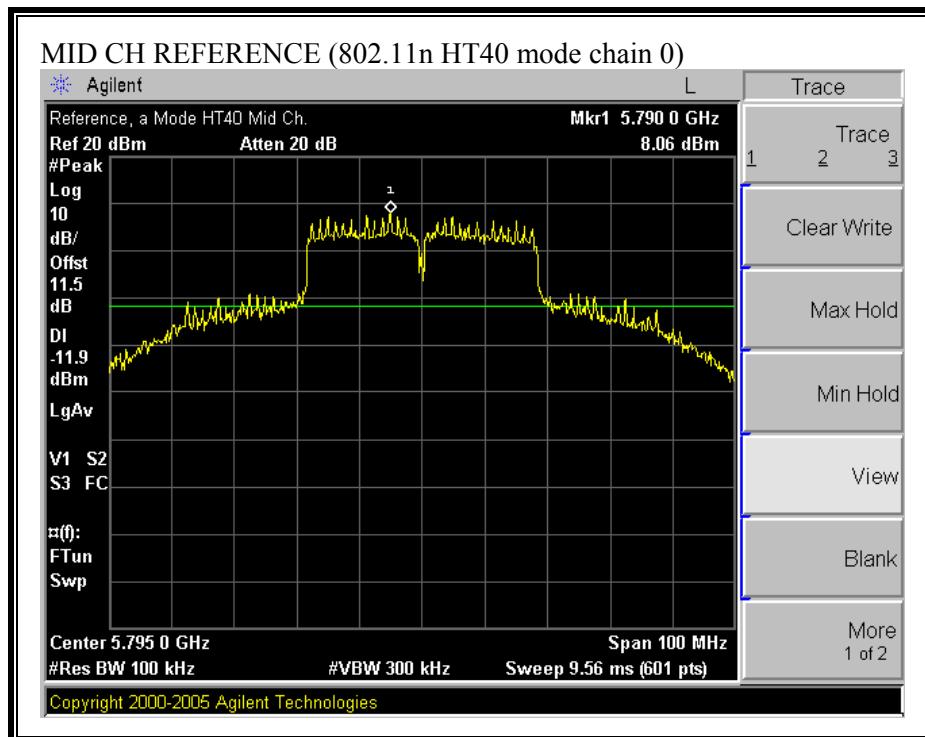


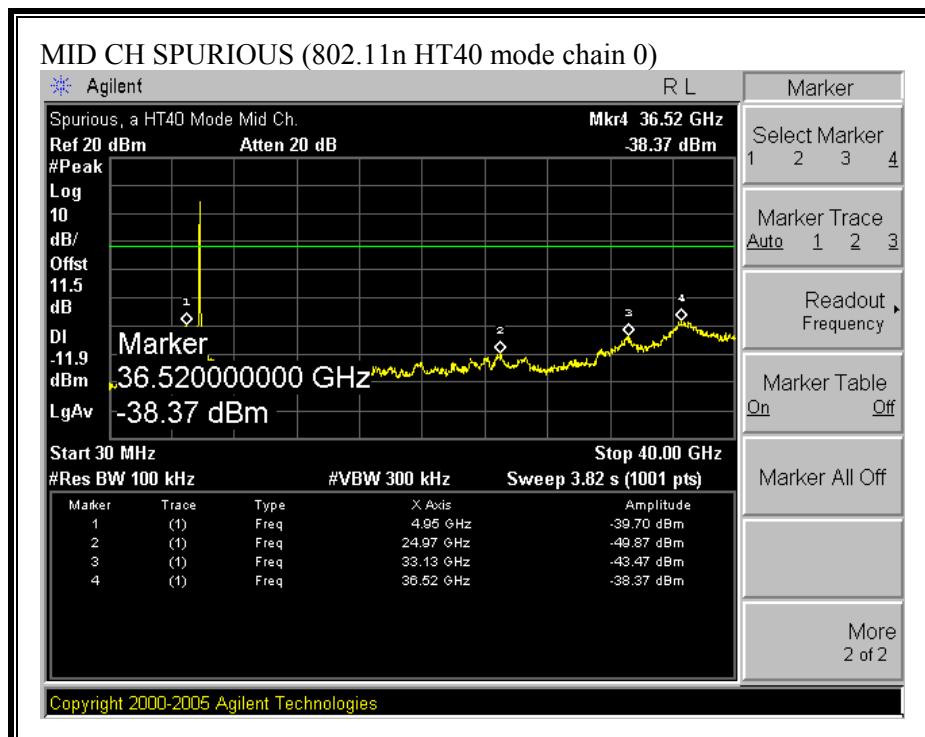


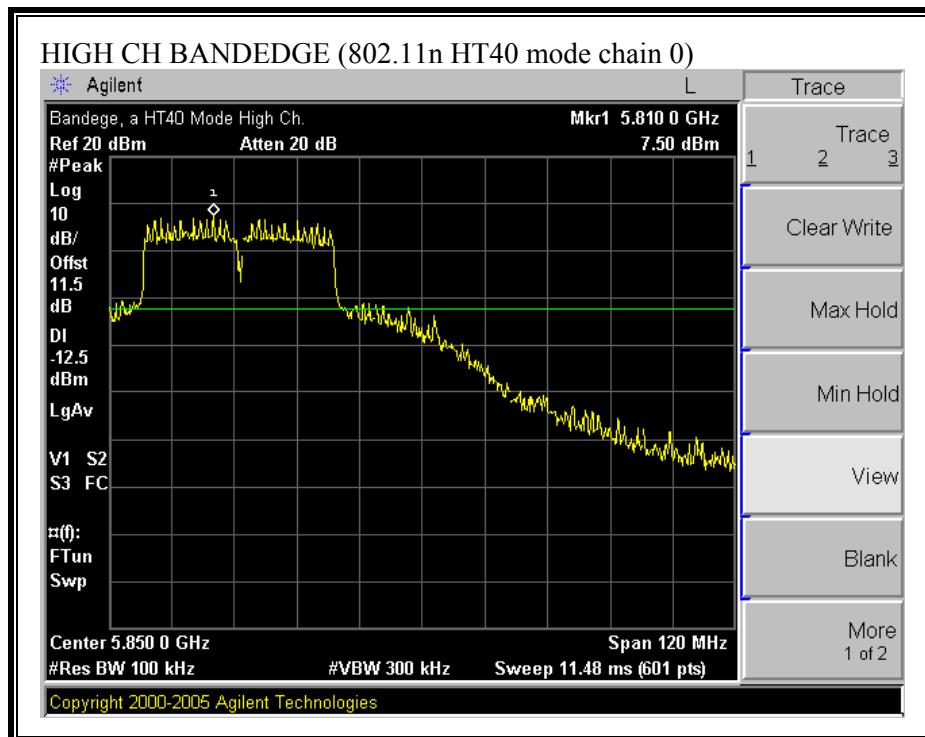


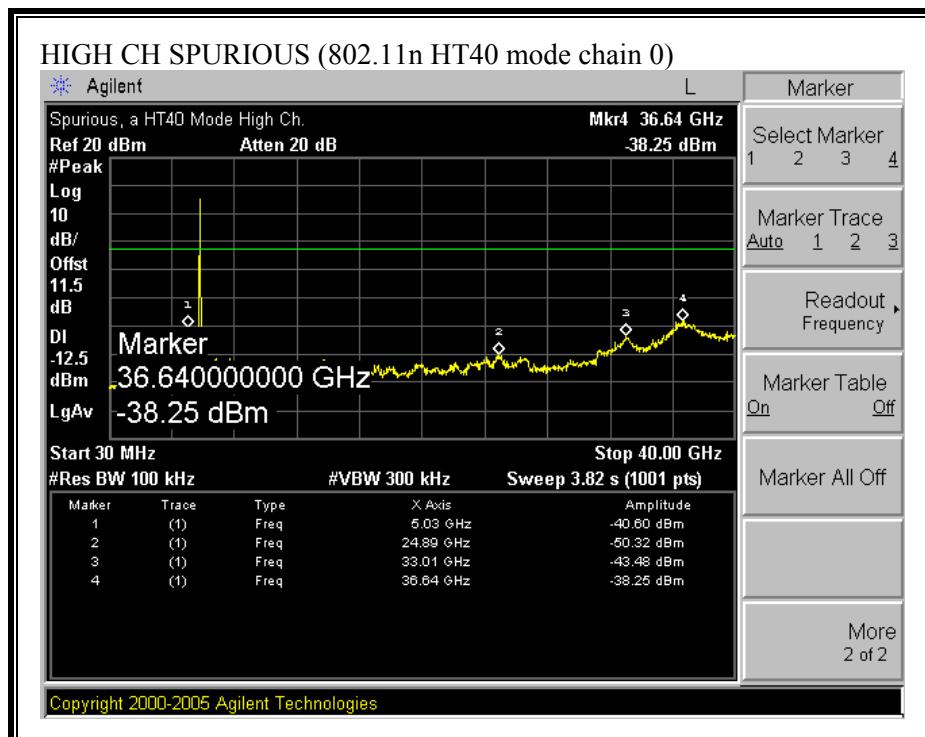



**SPURIOUS EMISSIONS (802.11n HT40 MODE CHAIN 1)**

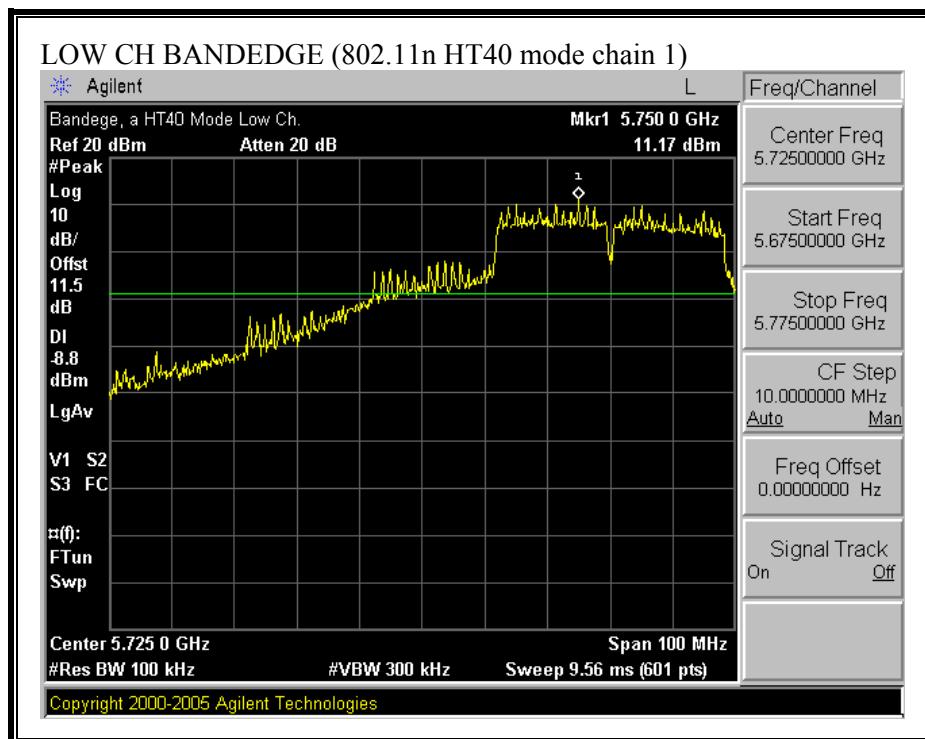


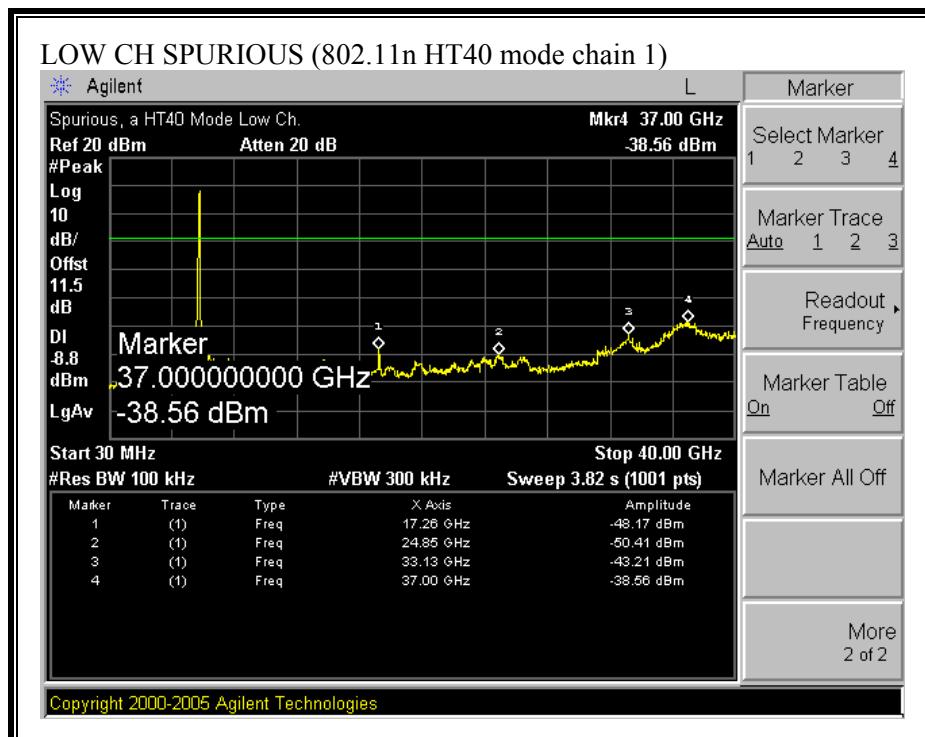

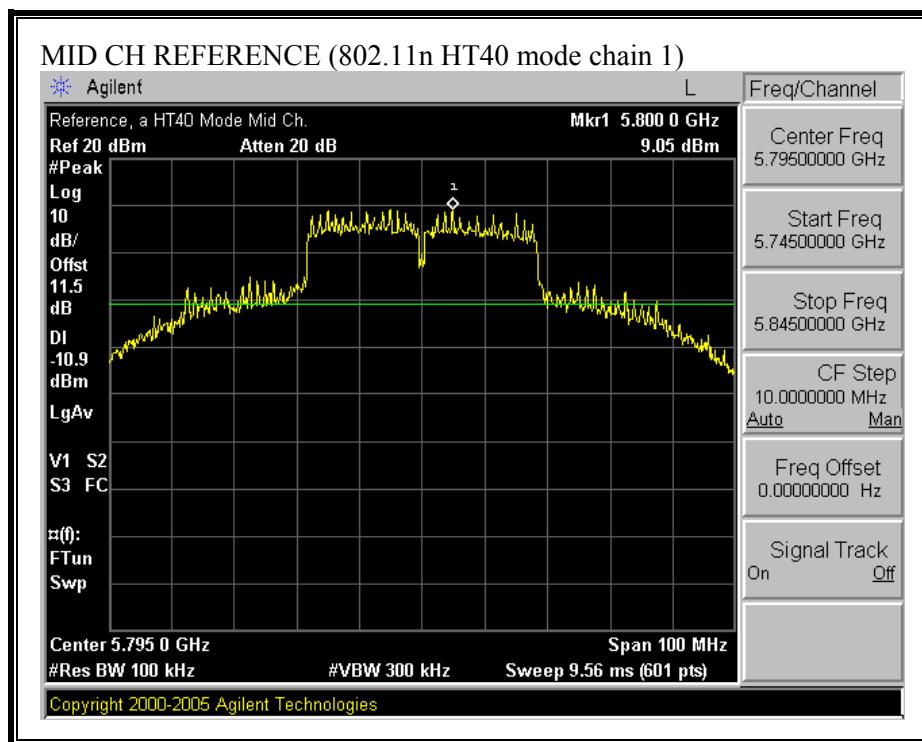


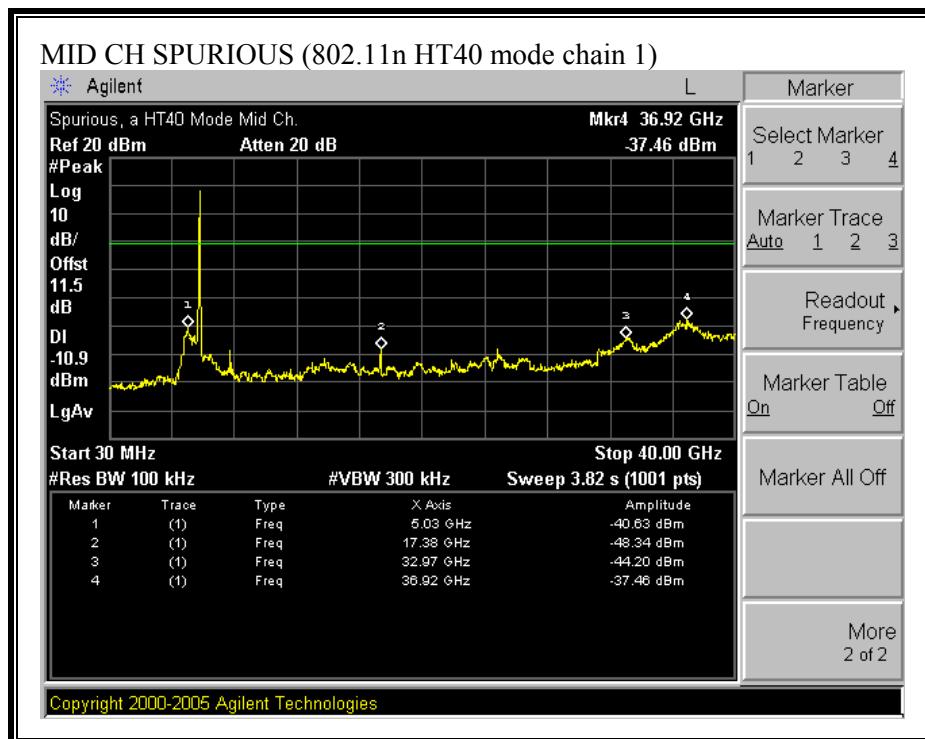


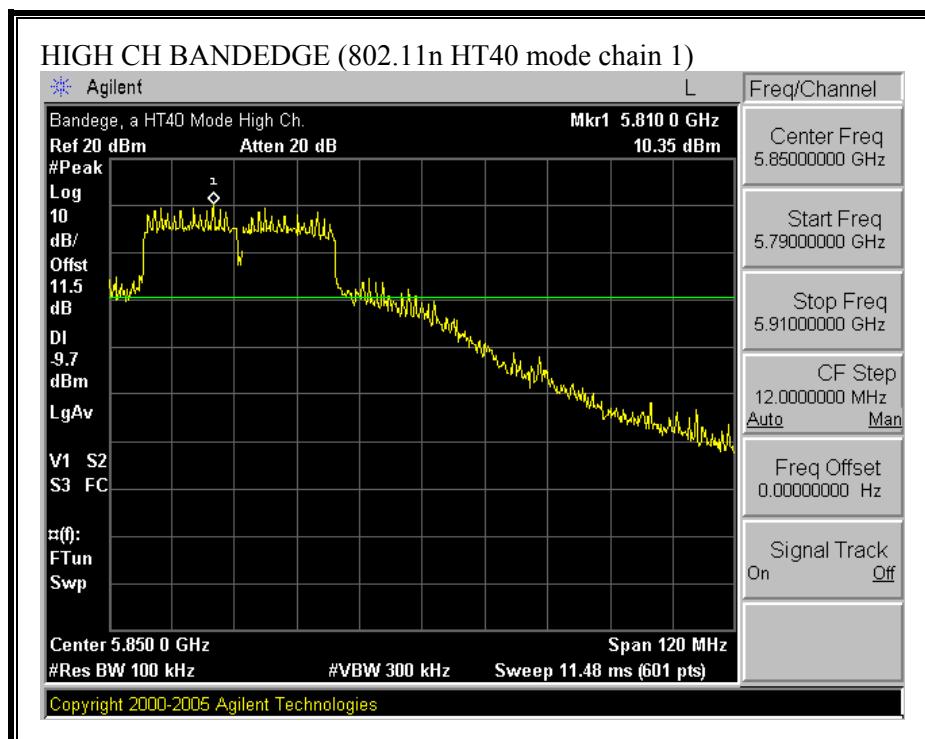


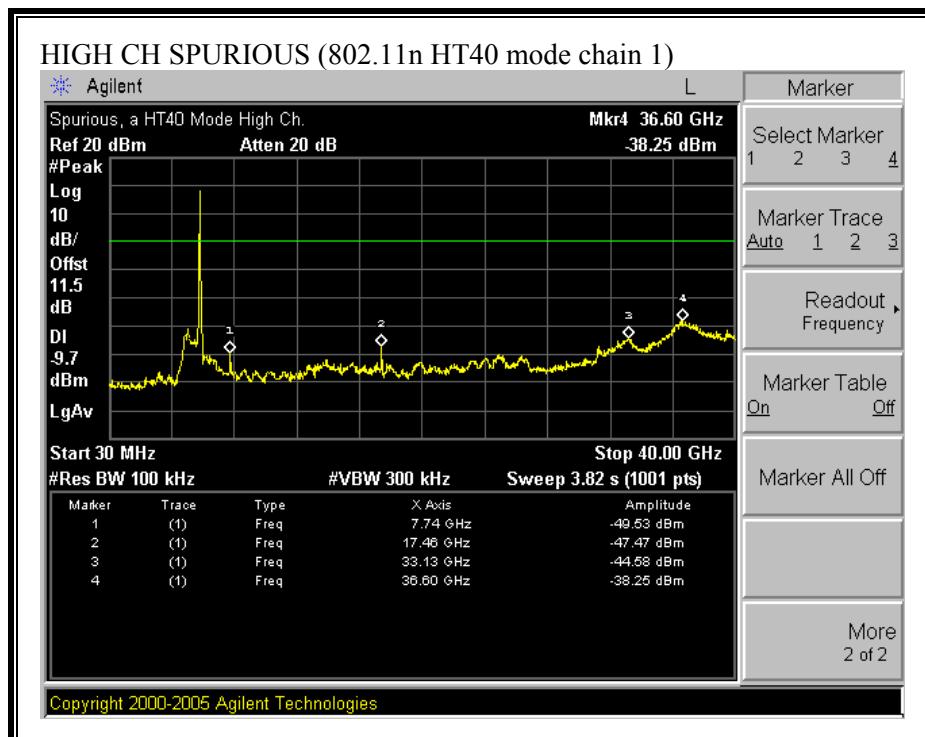



**SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN 2)**

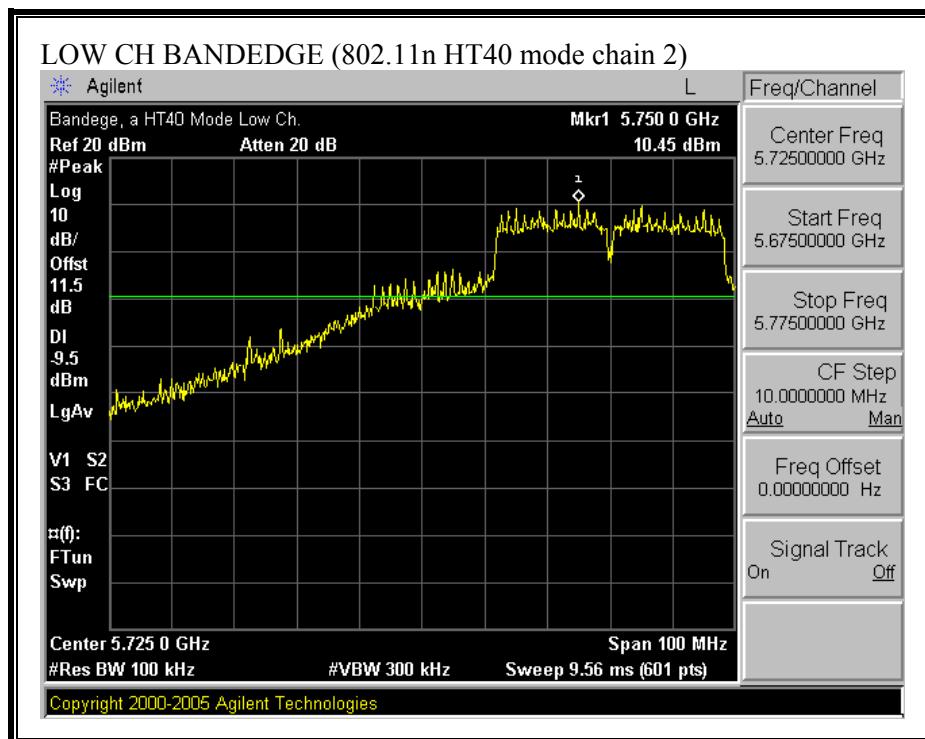


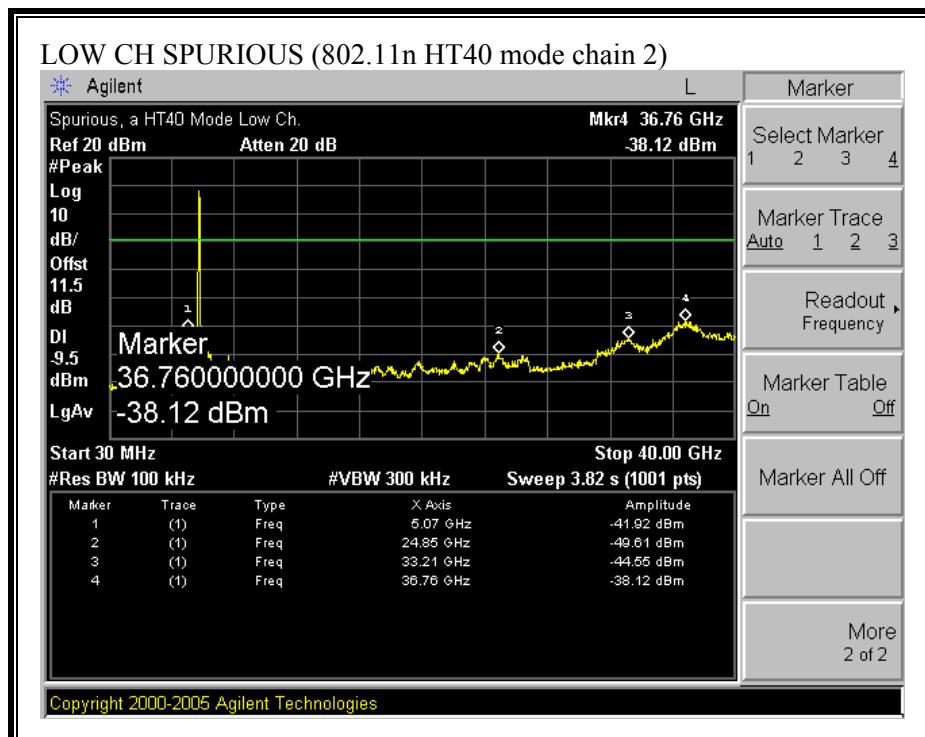

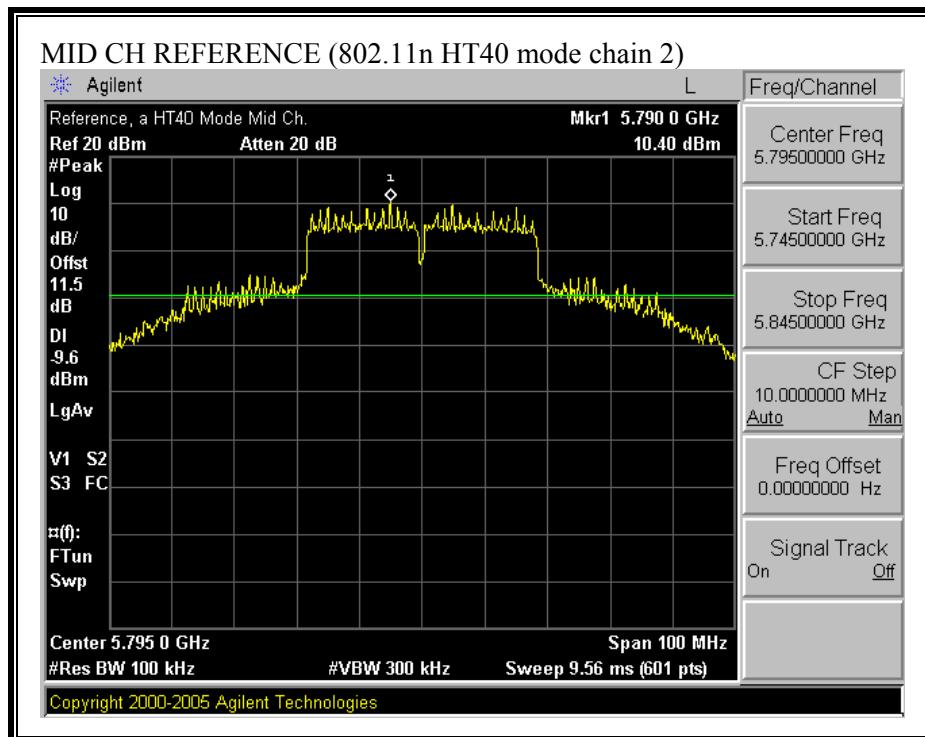


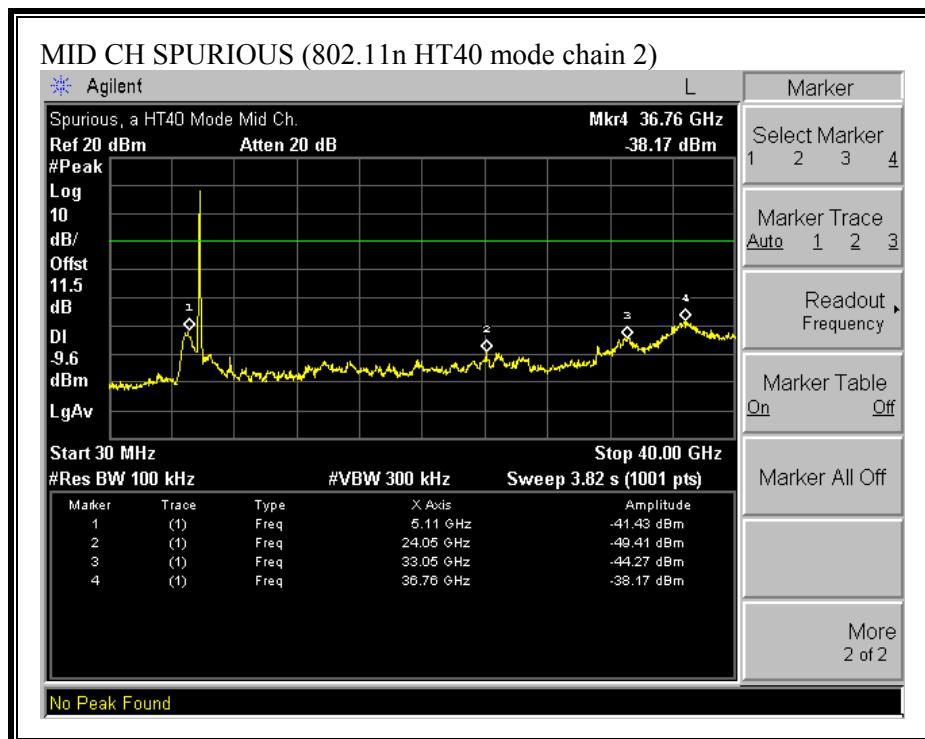


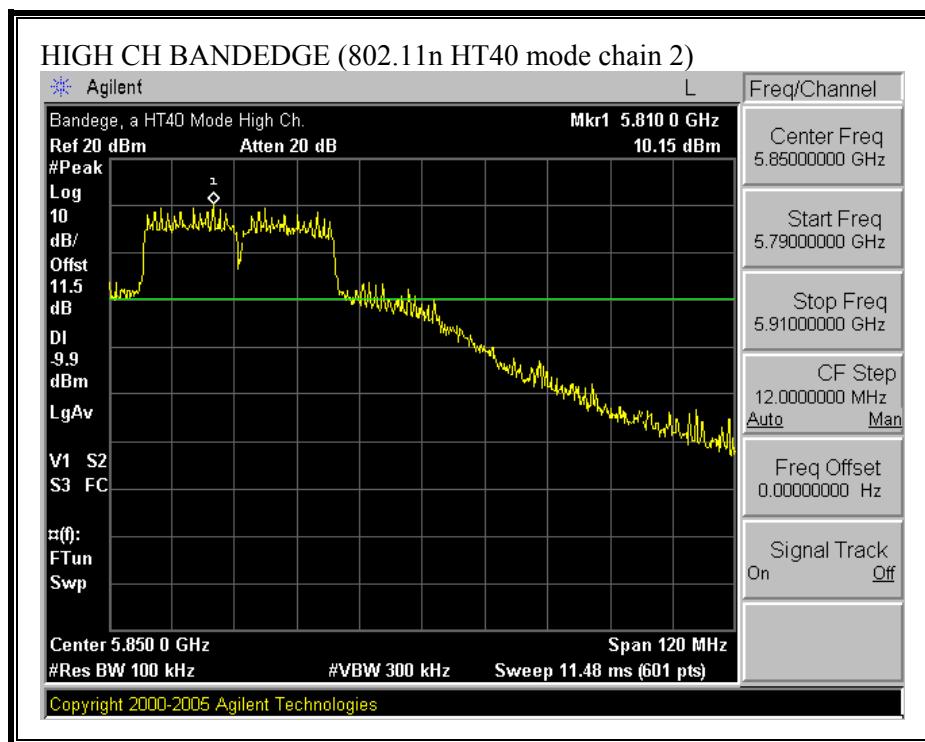


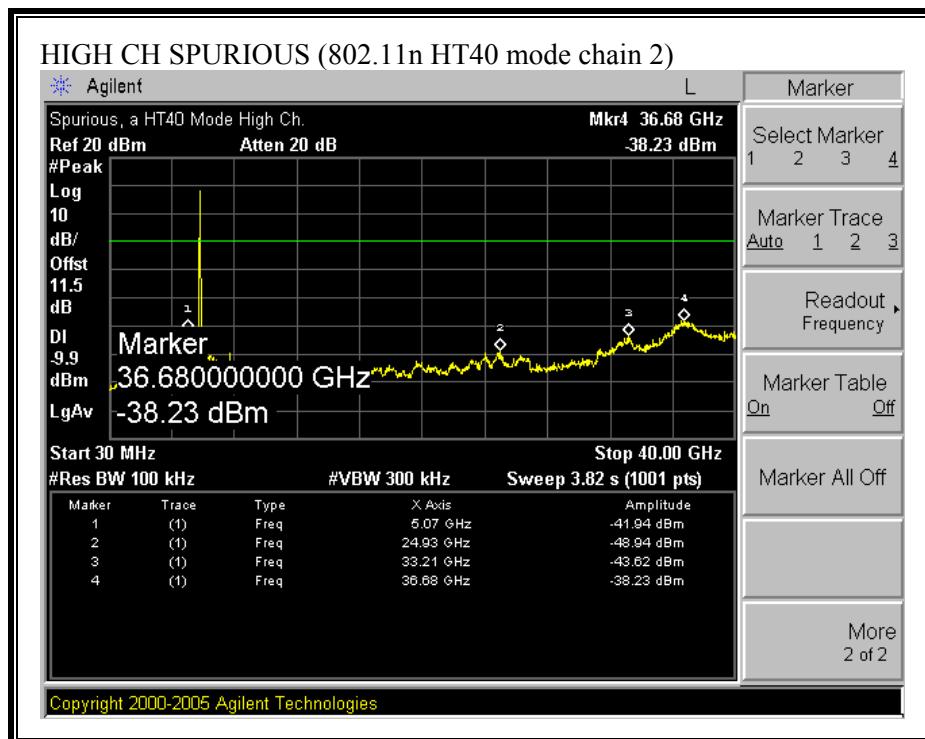



**COMBINED SPURIOUS EMISSIONS (802.11a MODE)**

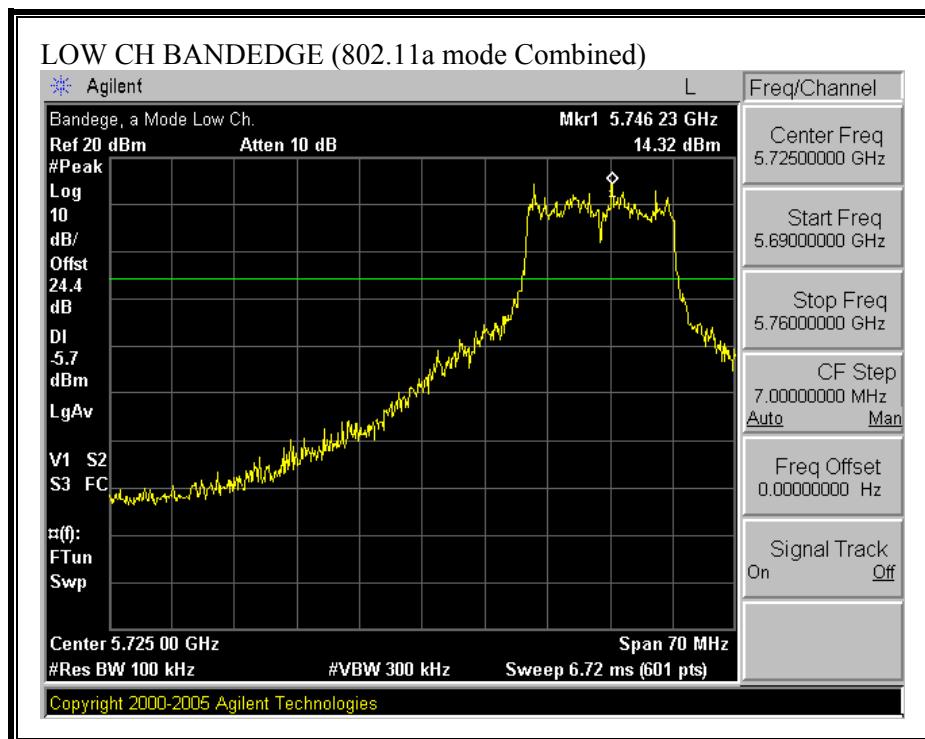


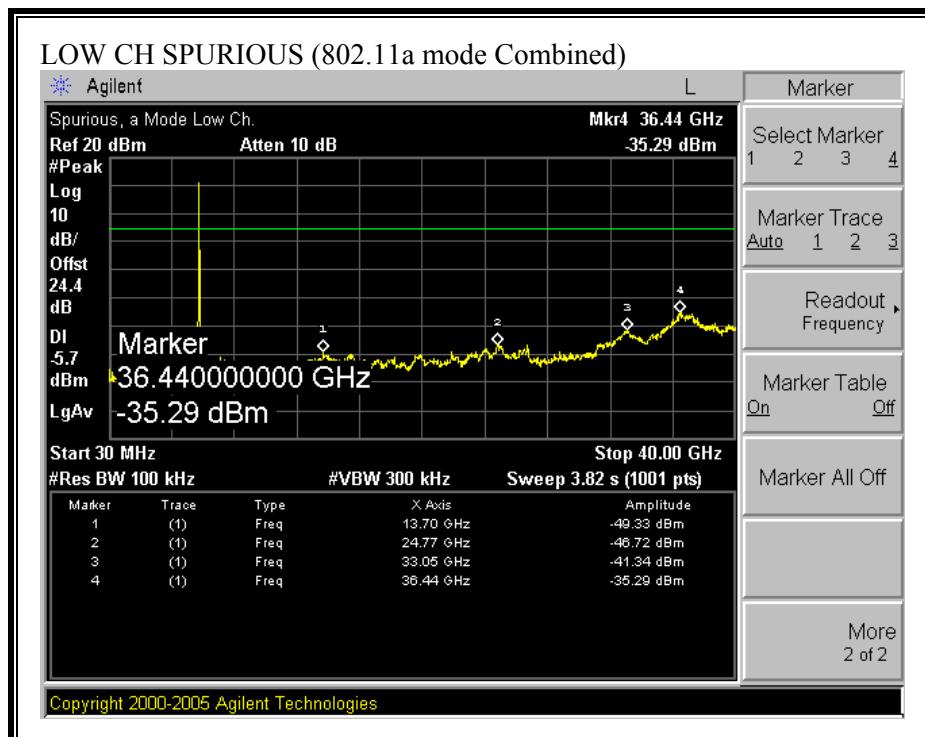

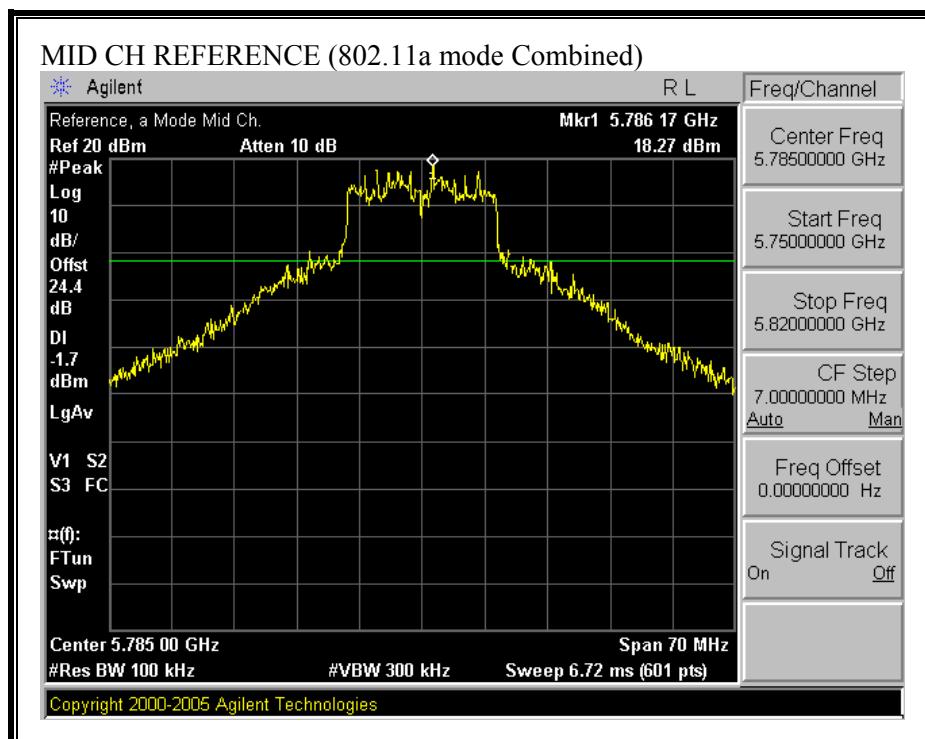


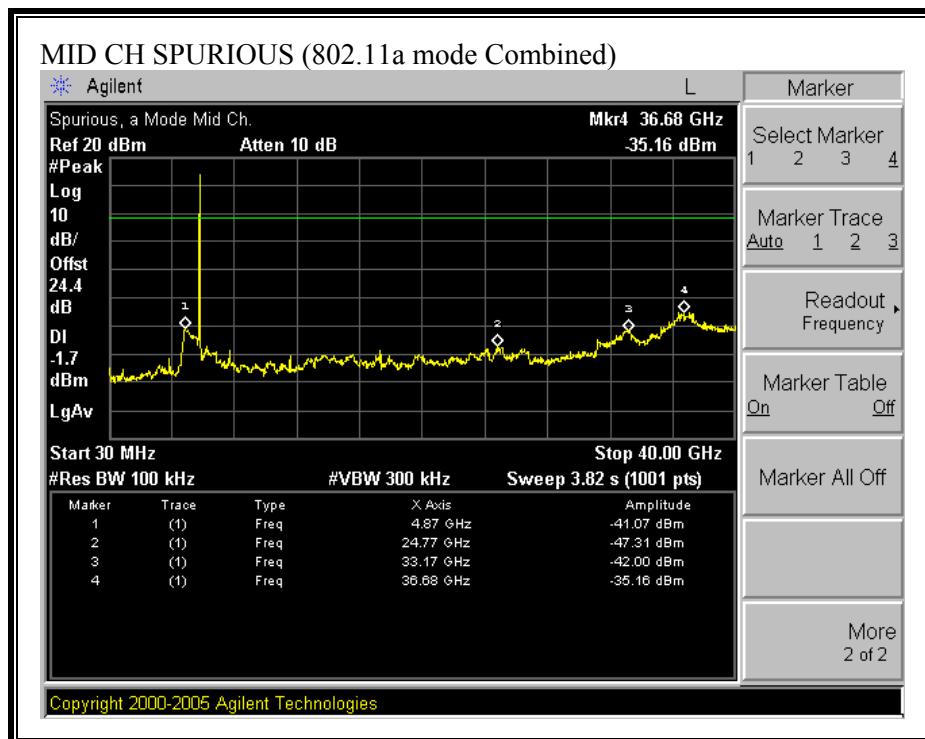


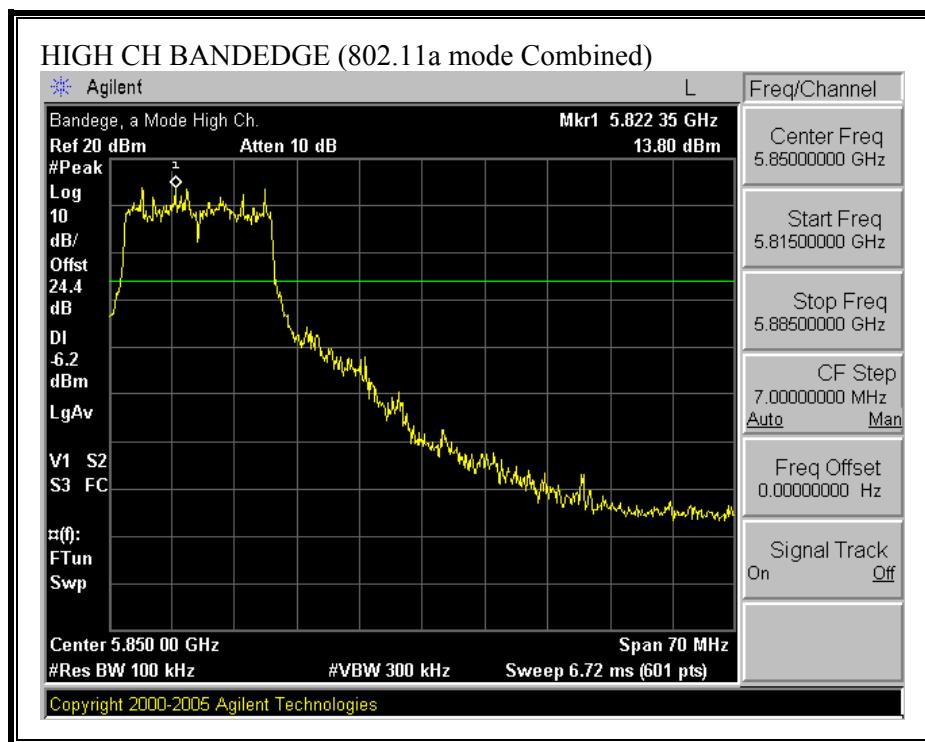


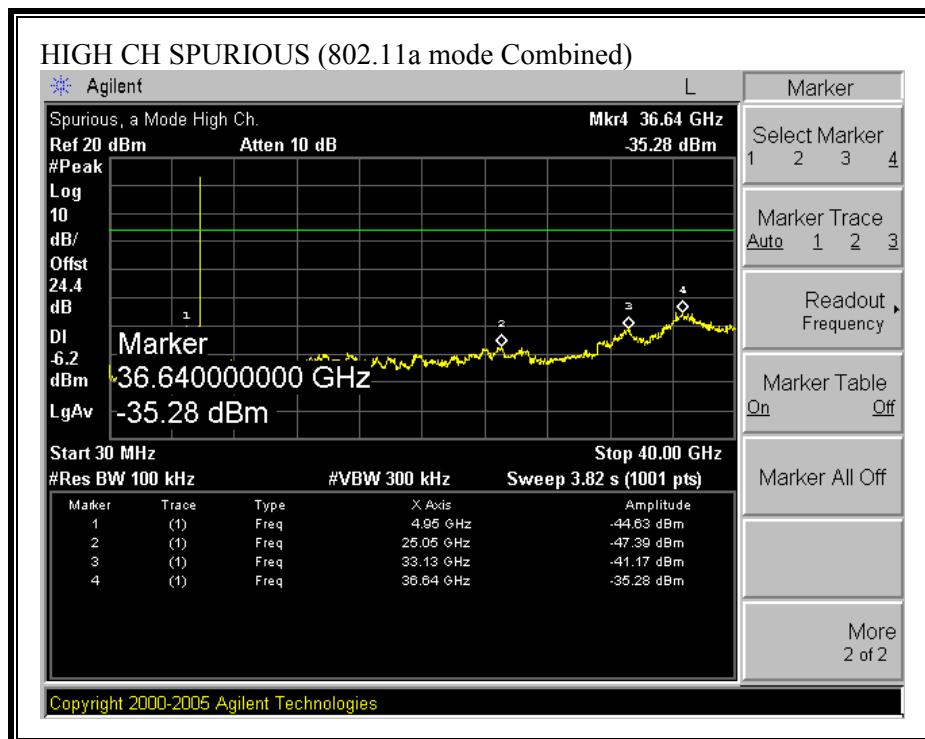



**COMBINED SPURIOUS EMISSIONS (802.11n HT20 MODE)**

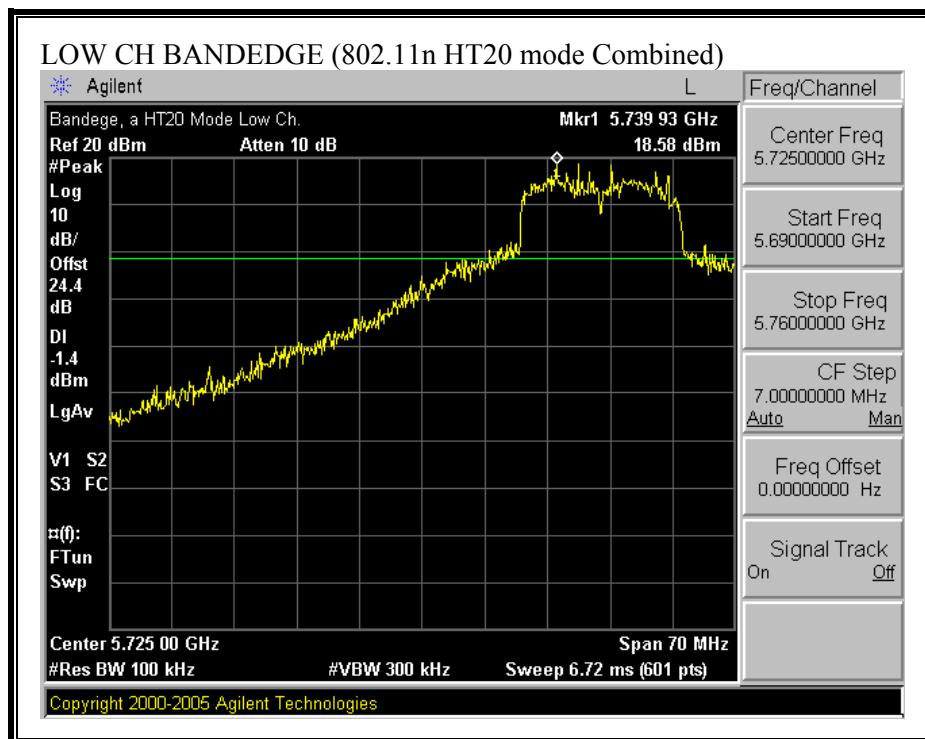


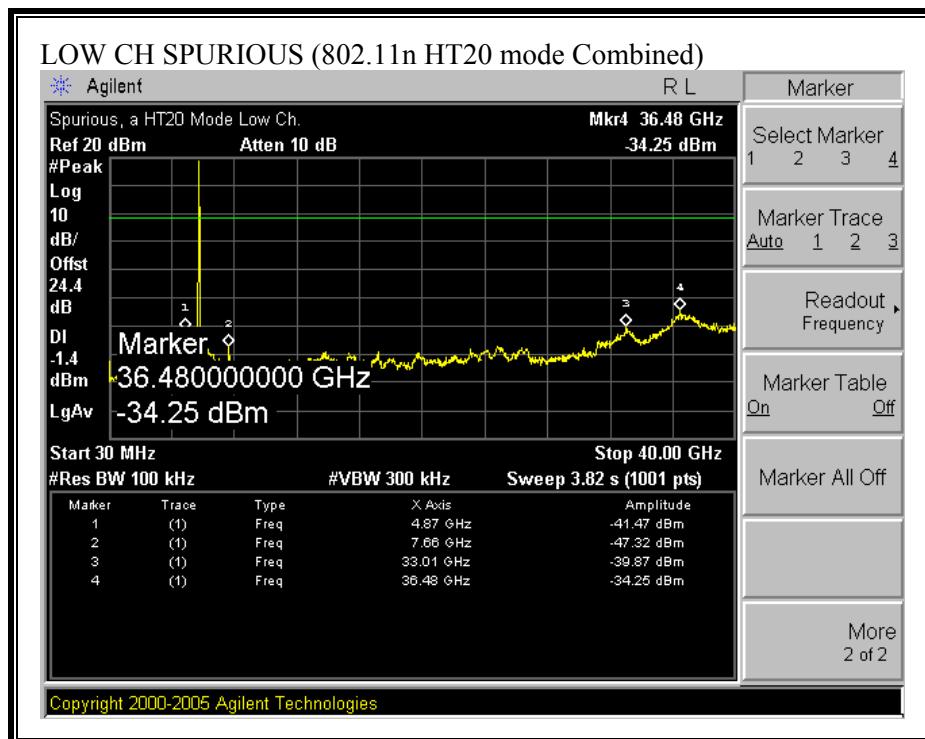

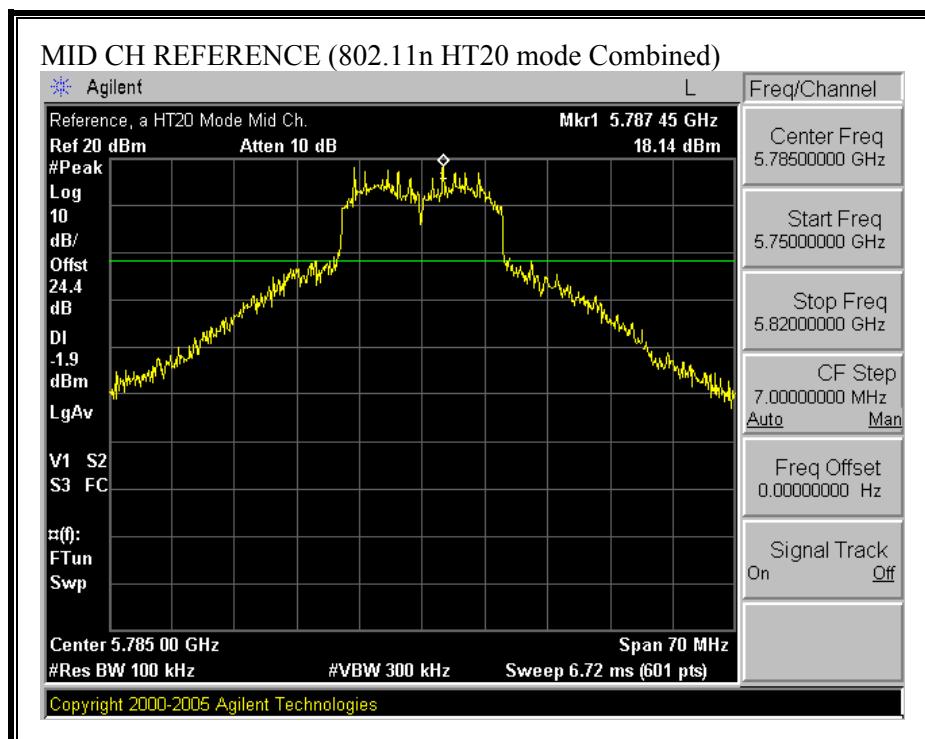


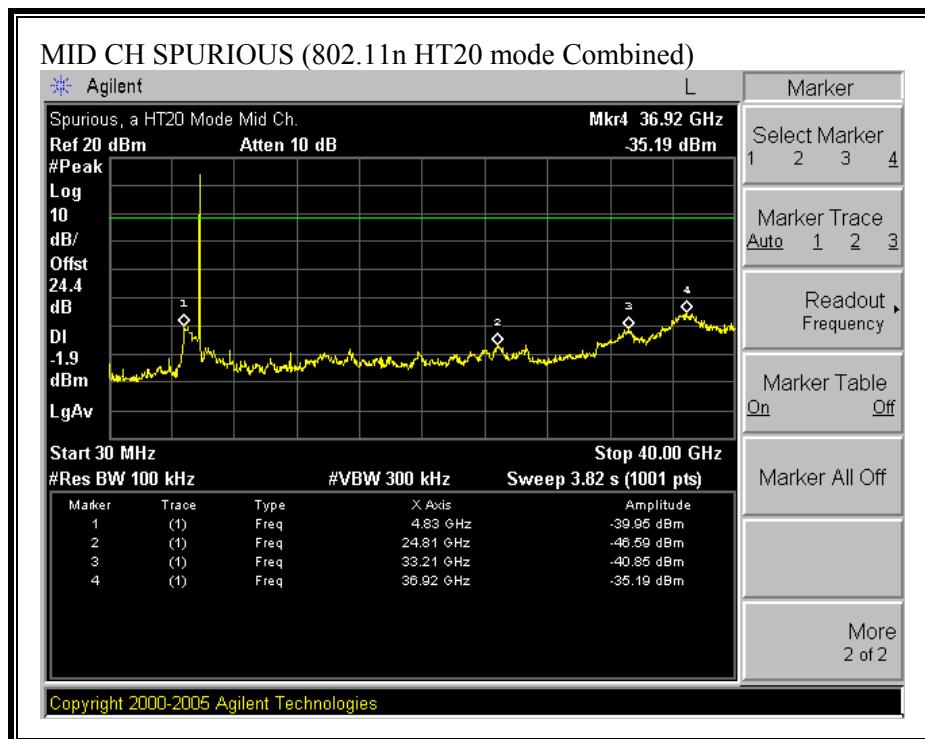


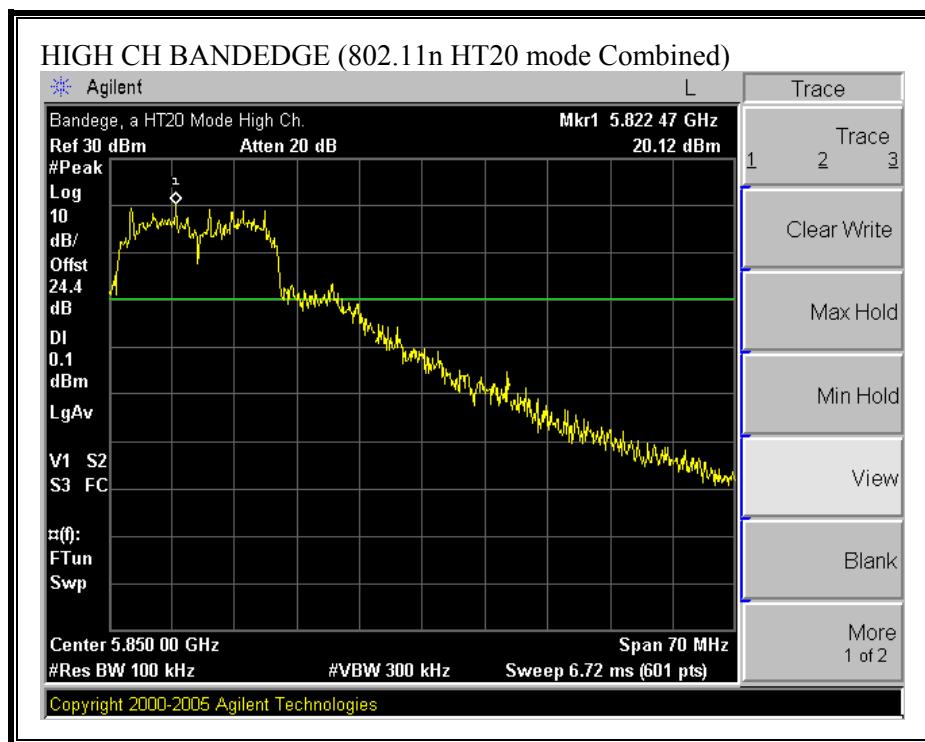


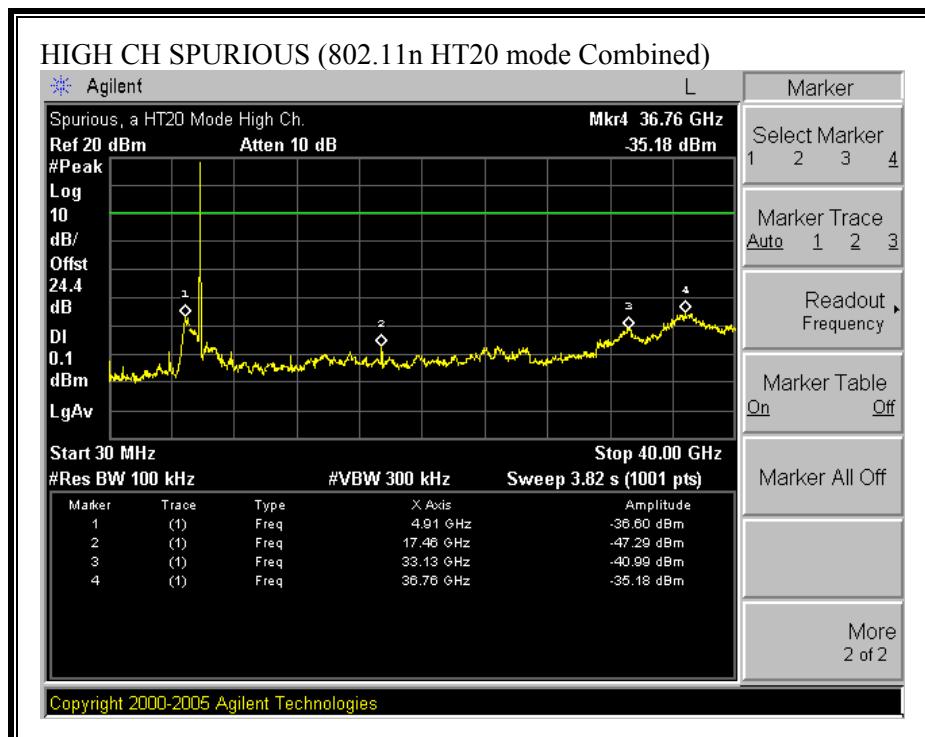



**COMBINED SPURIOUS EMISSIONS (802.11 HT40 MODE)**

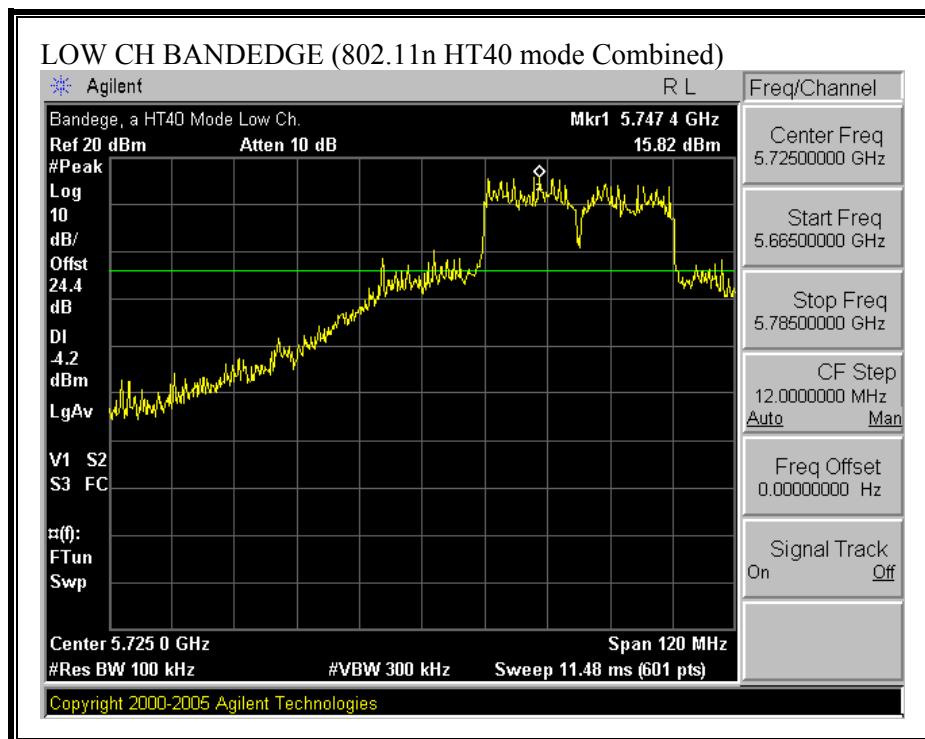


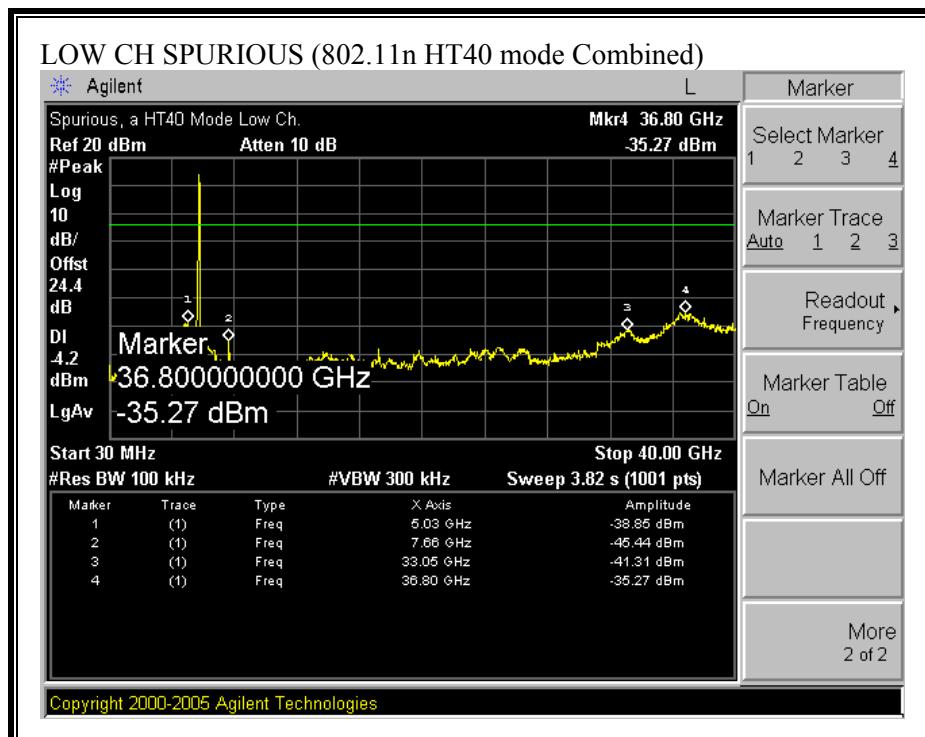

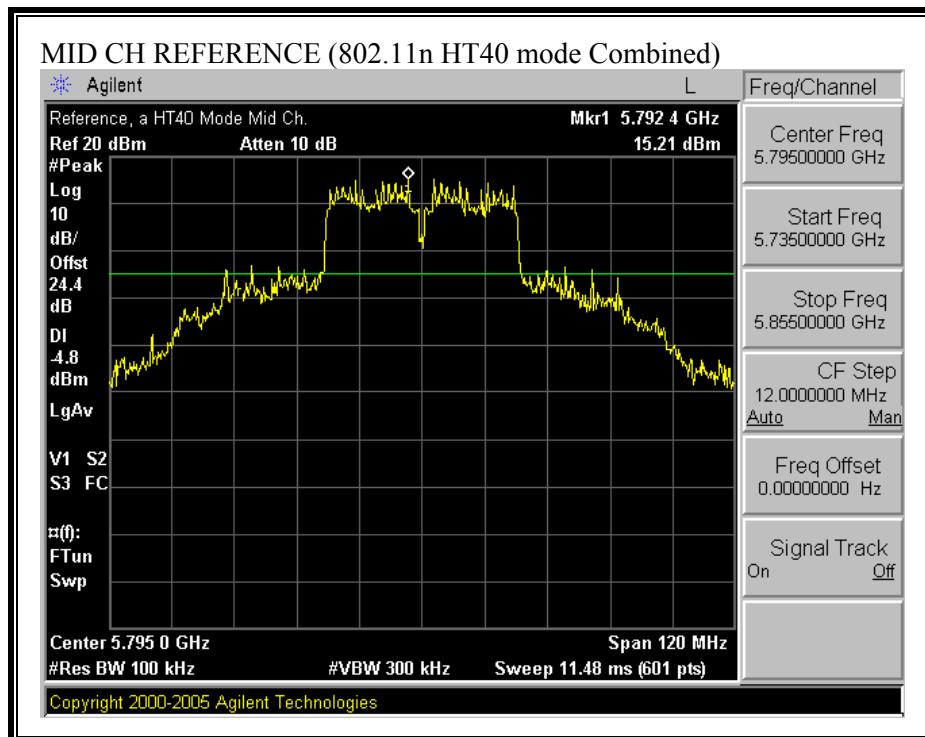

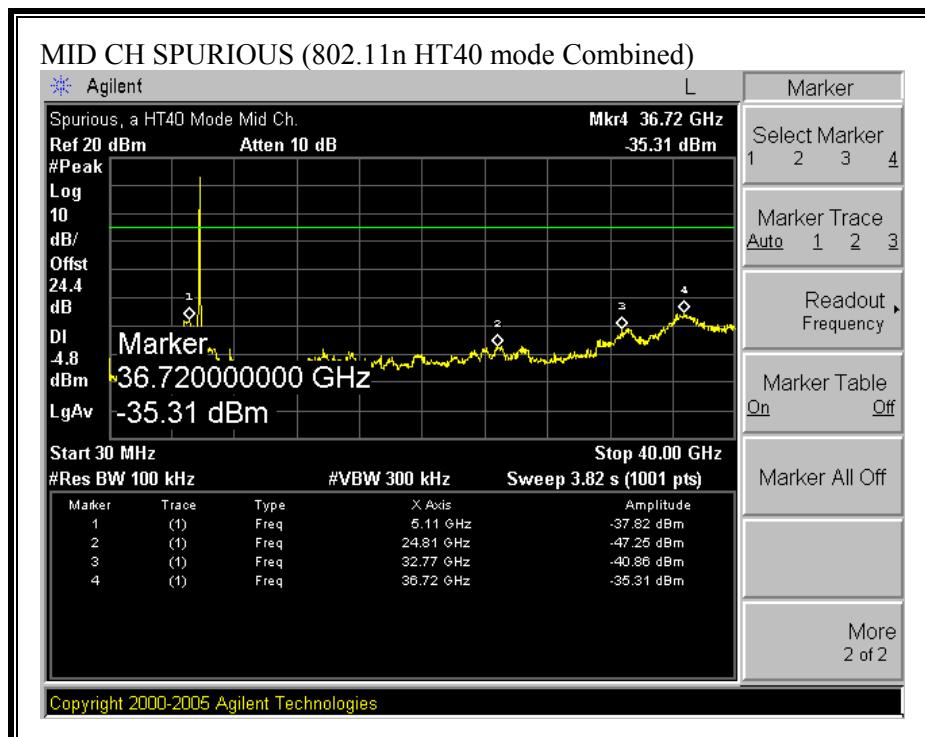

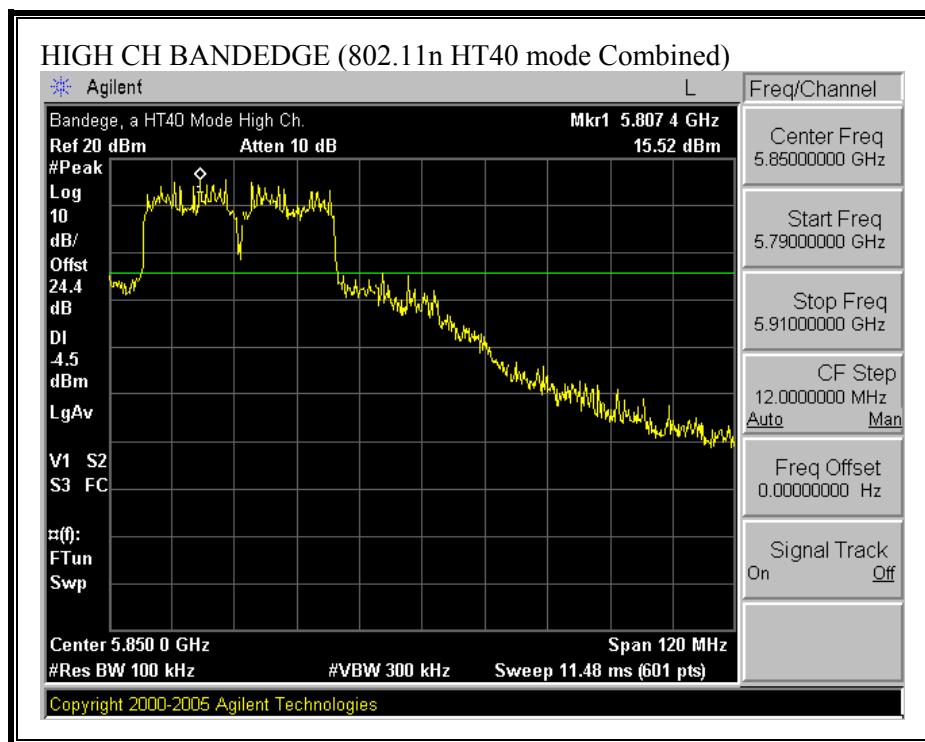

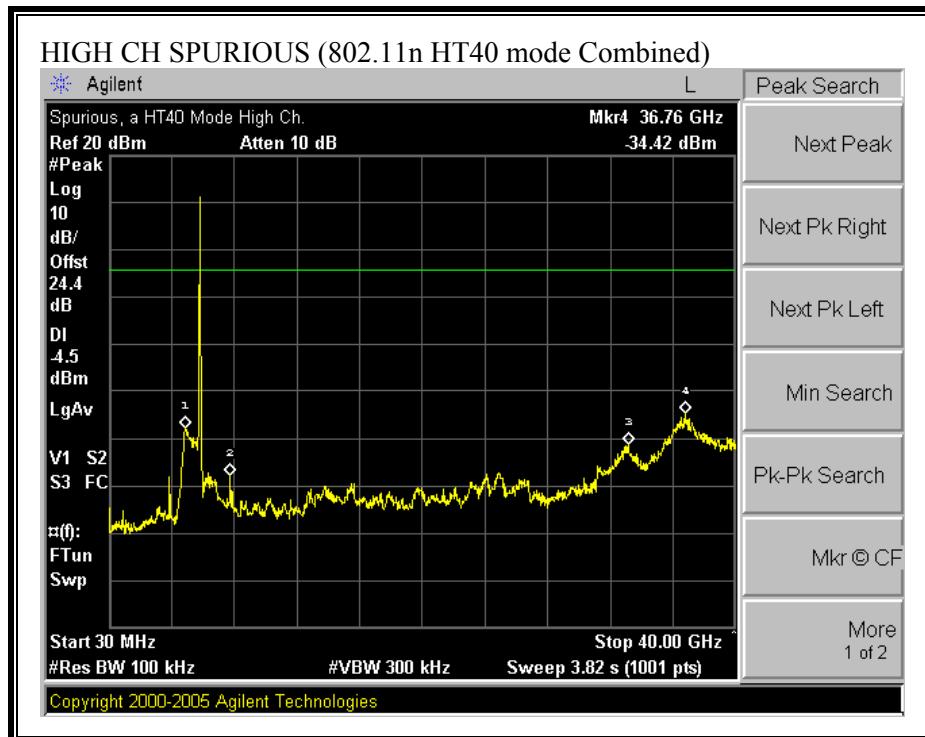

## 7.2.6. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10) / (d^2)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

**LIMITS**

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

Mode	MPE Distance (cm)	Total Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )
802.11a	20.0	27.47	2.90	0.22
802.11n HT20	20.0	28.67	2.90	0.29
802.11n HT40	20.0	29.10	2.90	0.31

## 7.3. RADIATED EMISSIONS

### 7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### 7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

#### RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL)

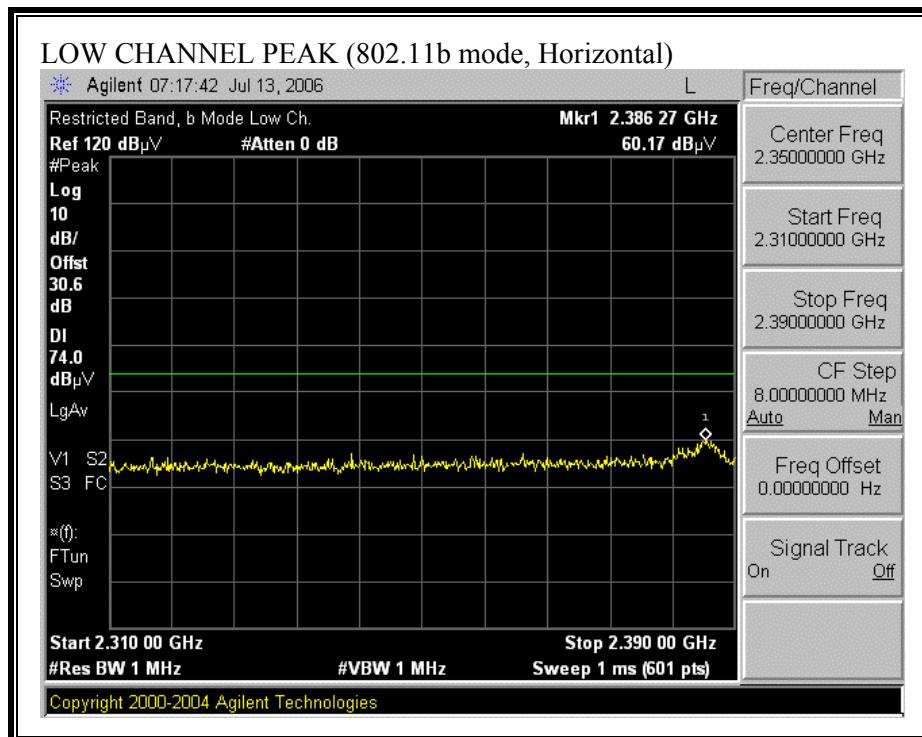


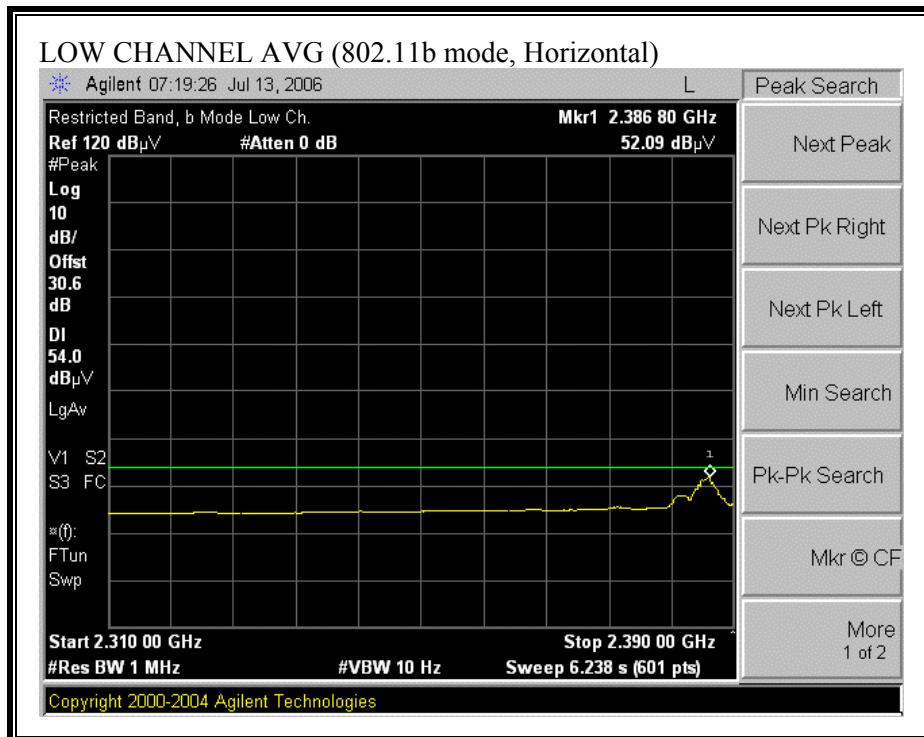


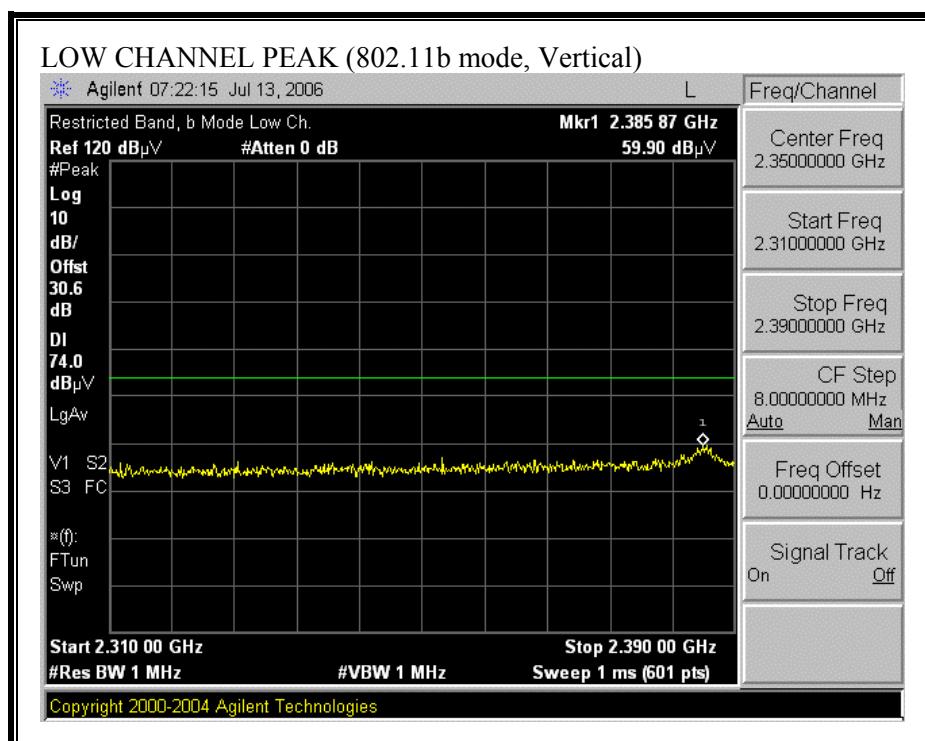


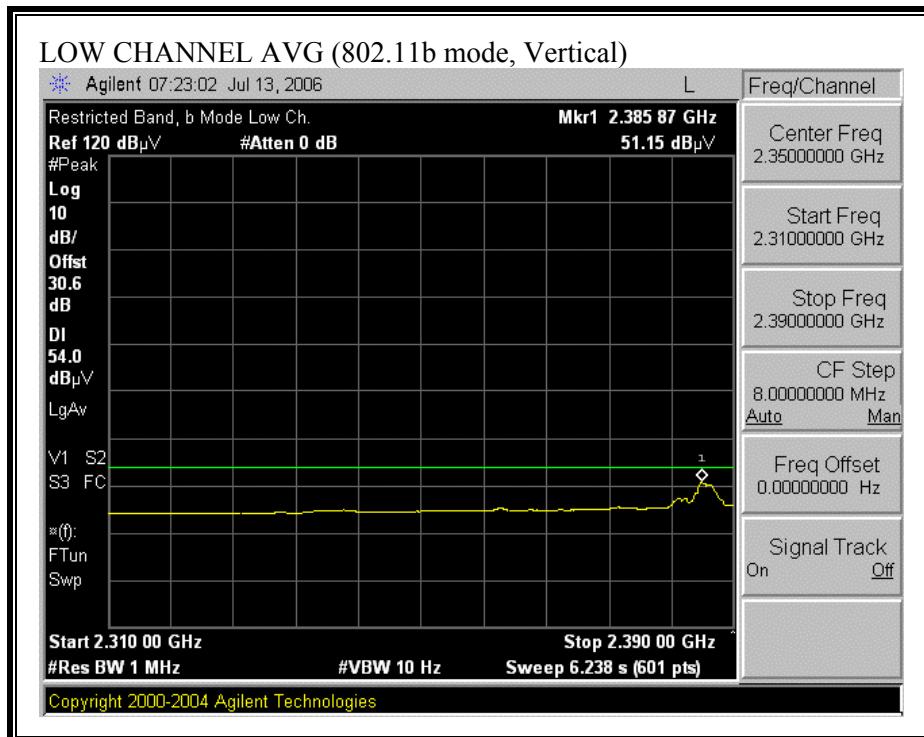


**RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)**

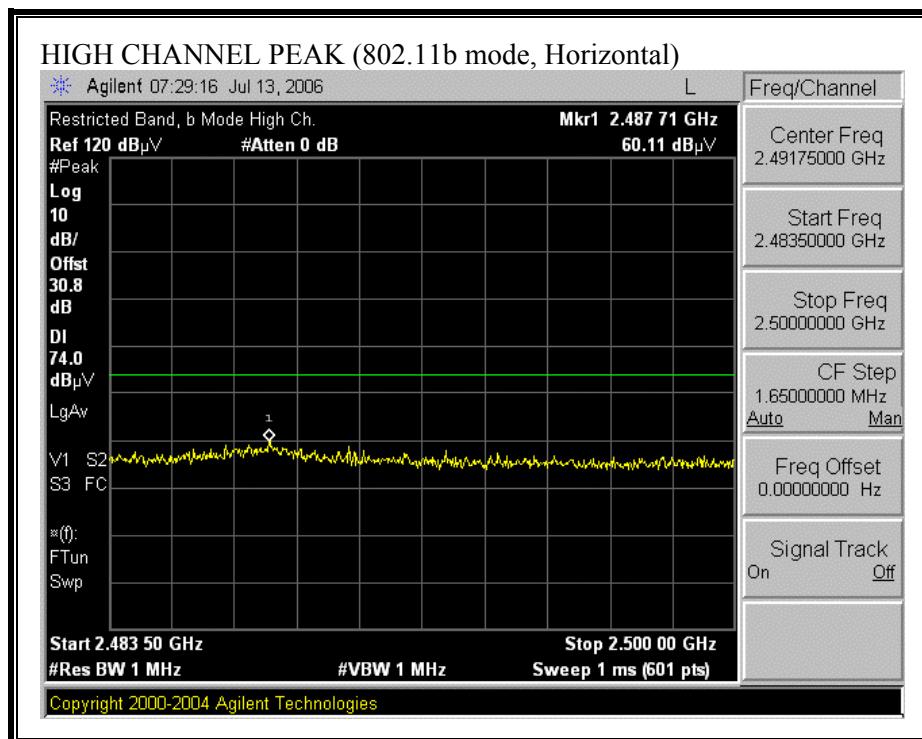

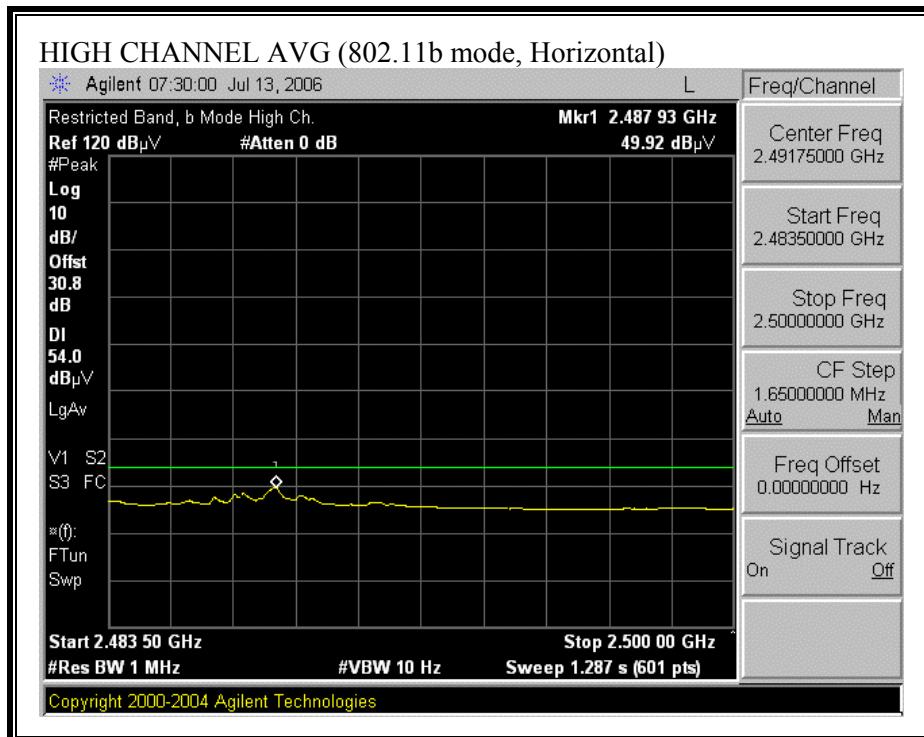

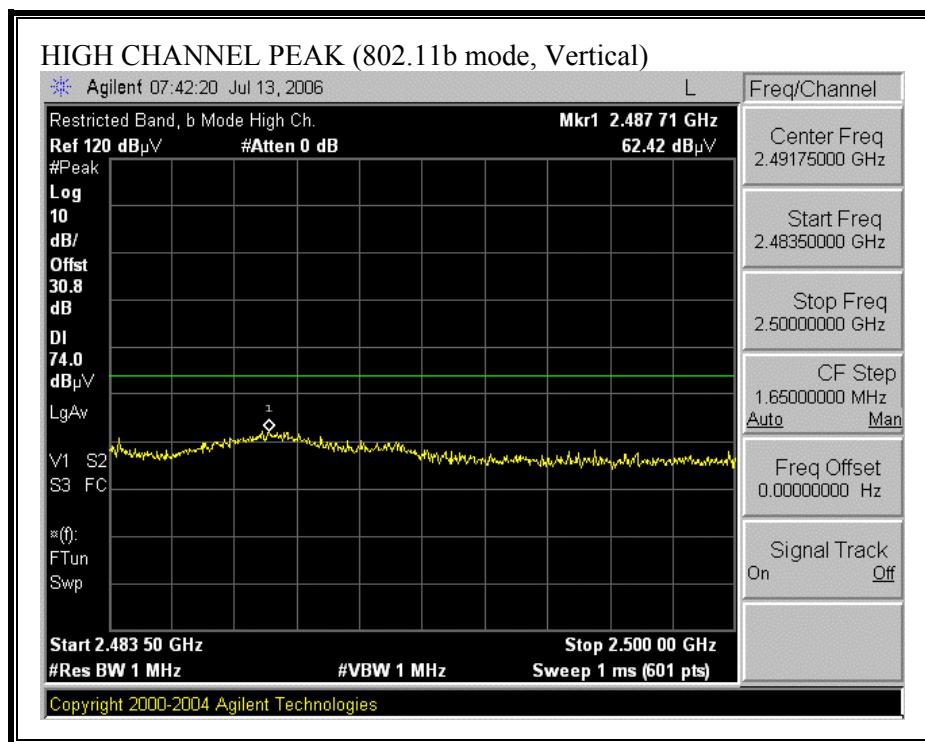


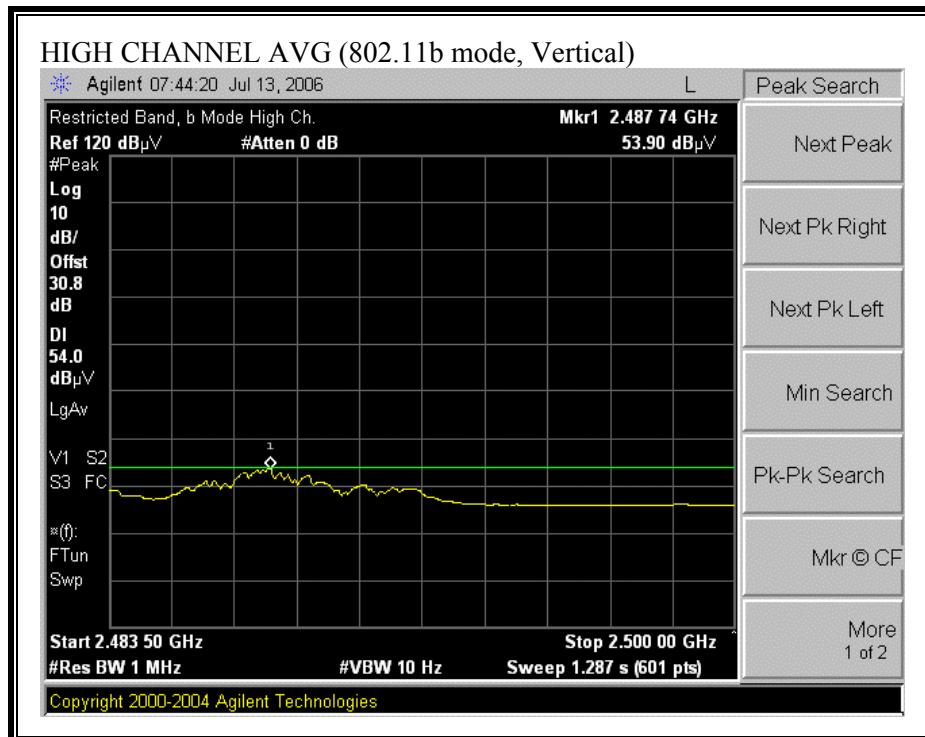



**HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)**


07/24/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: William Zhuang Project #: 06U10333 Company: Apple Computers Inc. EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type EUT M/N: A1143 Test Target: Mode Oper: Tx On, b Mode															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss	HPF	High Pass Filter												
f	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Ch. 2412 MHz, 17 dBm</b>															
4.824	3.0	45.0	36.5	33.0	3.6	-36.5	0.0	0.6	45.7	37.3	74.0	54.0	-28.3	-16.7	V
4.824	3.0	44.0	35.4	33.0	3.6	-36.5	0.0	0.6	44.7	36.2	74.0	54.0	-29.3	-17.8	H
7.236	3.0	46.3	36.0	35.4	4.3	-36.2	0.0	0.6	50.5	40.2	74.0	54.0	-23.5	-13.8	H
7.236	3.0	50.1	41.4	35.4	4.3	-36.2	0.0	0.6	54.3	45.6	74.0	54.0	-19.7	-8.4	V
<b>High Ch. 2462 MHz, 17 dBm</b>															
4.924	3.0	49.9	36.7	33.1	3.6	-36.5	0.0	0.6	50.8	37.6	74.0	54.0	-23.2	-16.4	V
4.924	3.0	52.6	41.2	33.1	3.6	-36.5	0.0	0.6	53.5	42.1	74.0	54.0	-20.5	-11.9	H
7.386	3.0	49.2	37.3	35.6	4.4	-36.2	0.0	0.6	53.6	41.7	74.0	54.0	-20.4	-12.3	H
7.386	3.0	52.8	42.2	35.6	4.4	-36.2	0.0	0.6	57.2	46.6	74.0	54.0	-16.8	-7.5	V
<b>Mid Ch. 2437 MHz, 21 dBm</b>															
4.874	3.0	49.3	46.6	33.1	3.6	-36.5	0.0	0.6	50.1	47.4	74.0	54.0	-23.9	-6.6	V
4.874	3.0	52.0	50.0	33.1	3.6	-36.5	0.0	0.6	52.8	50.8	74.0	54.0	-21.2	-3.2	H
7.311	3.0	45.0	34.9	35.5	4.4	-36.2	0.0	0.6	49.3	39.1	74.0	54.0	-24.7	-14.9	H
7.311	3.0	45.4	36.6	35.5	4.4	-36.2	0.0	0.6	49.6	40.9	74.0	54.0	-24.4	-13.1	V

**RESTRICTED BANDEDGE (802.11g MODE, LOW CHANNEL)**

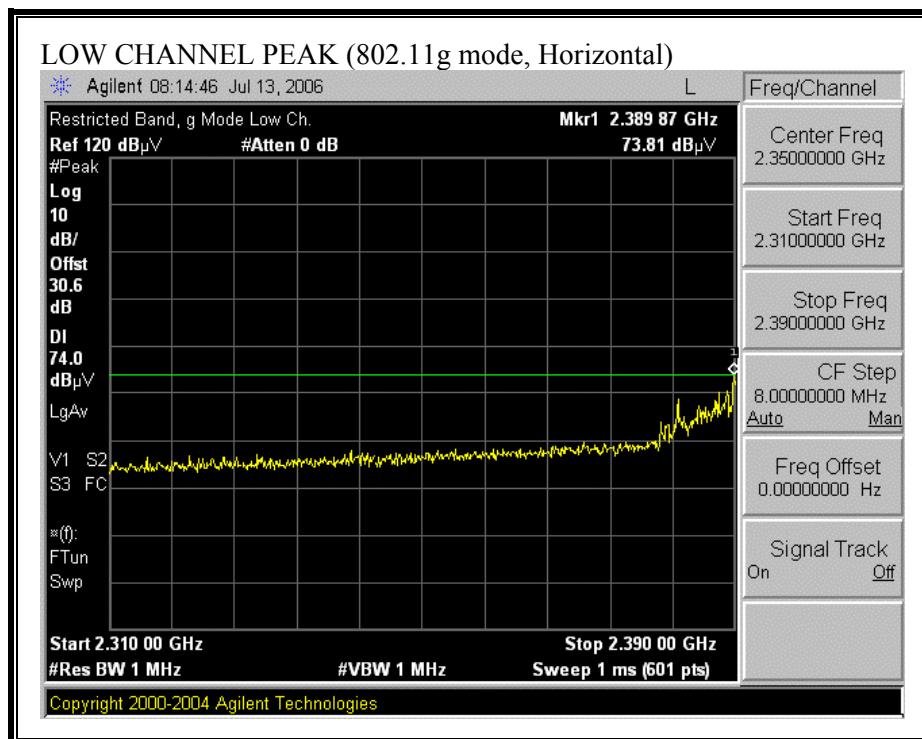


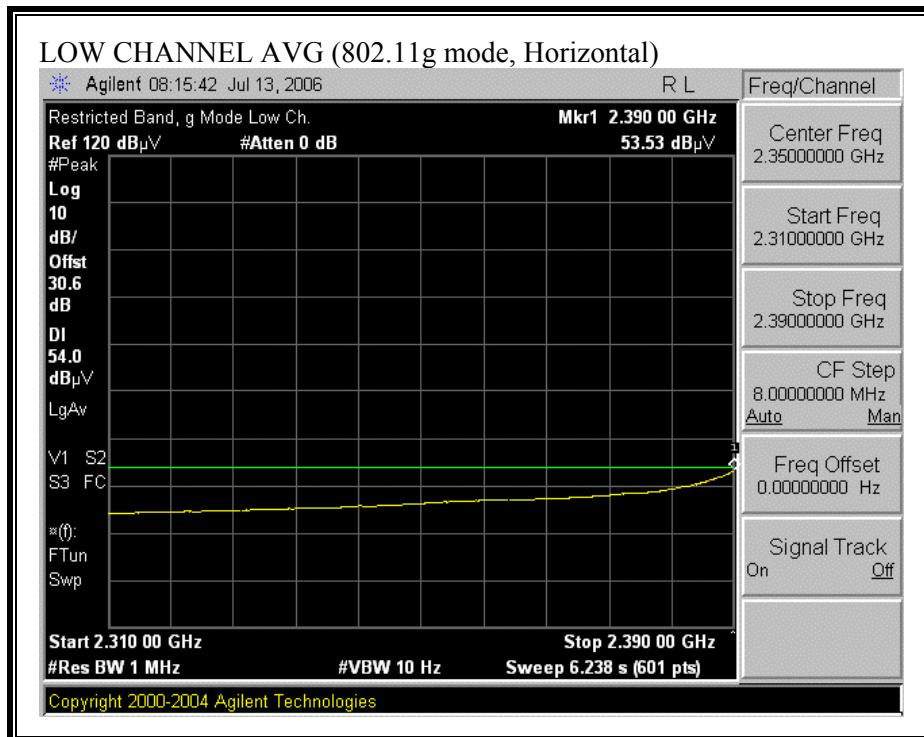


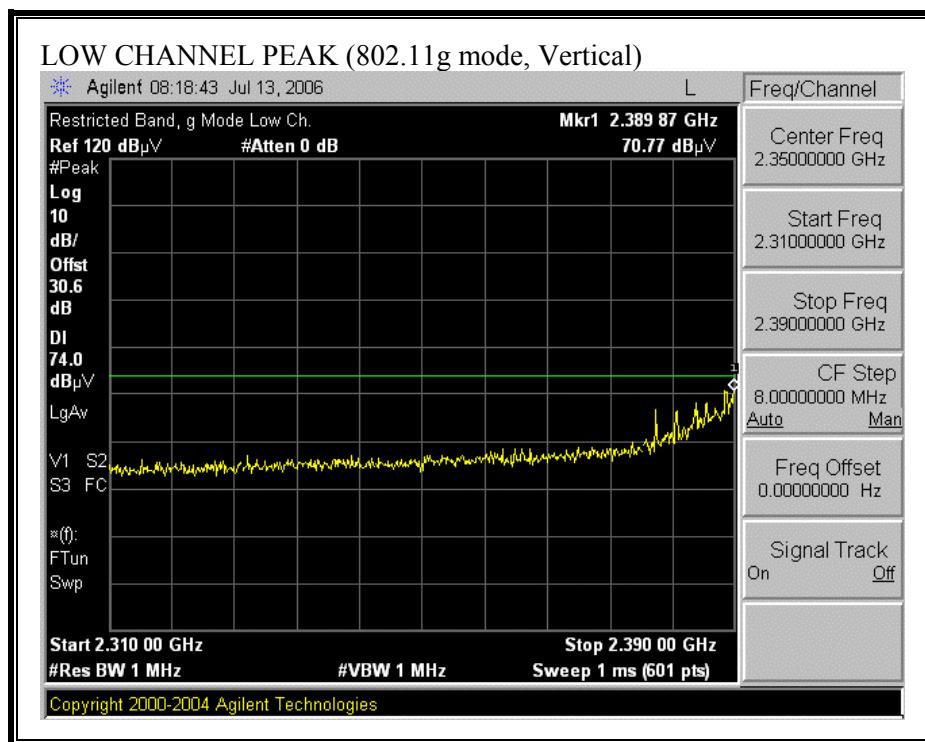


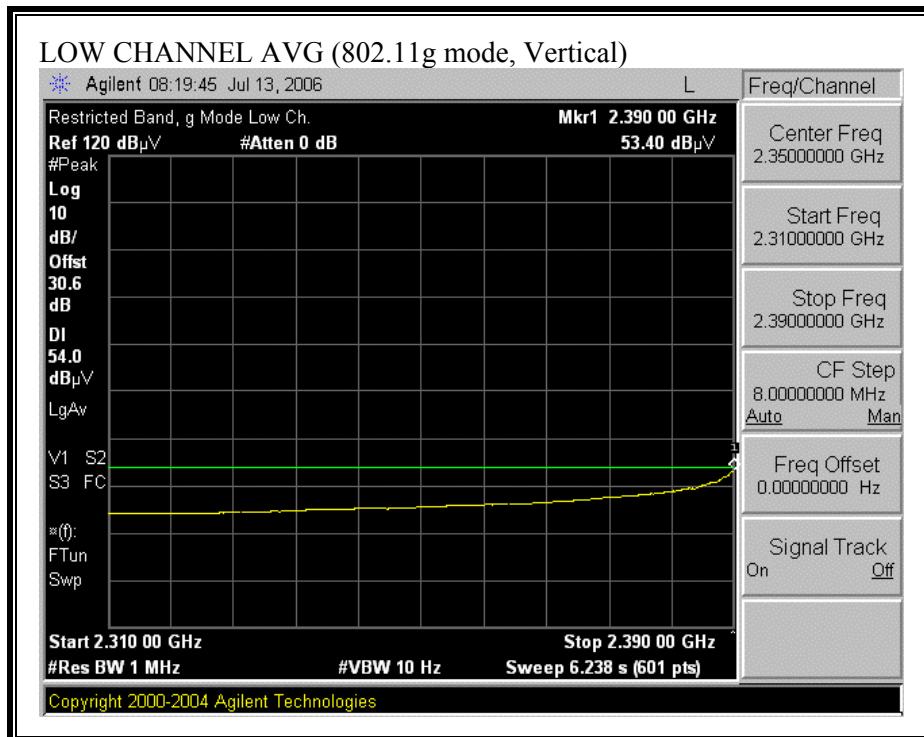


**RESTRICTED BANDEDGE (802.11g MODE, HIGH CHANNEL)**

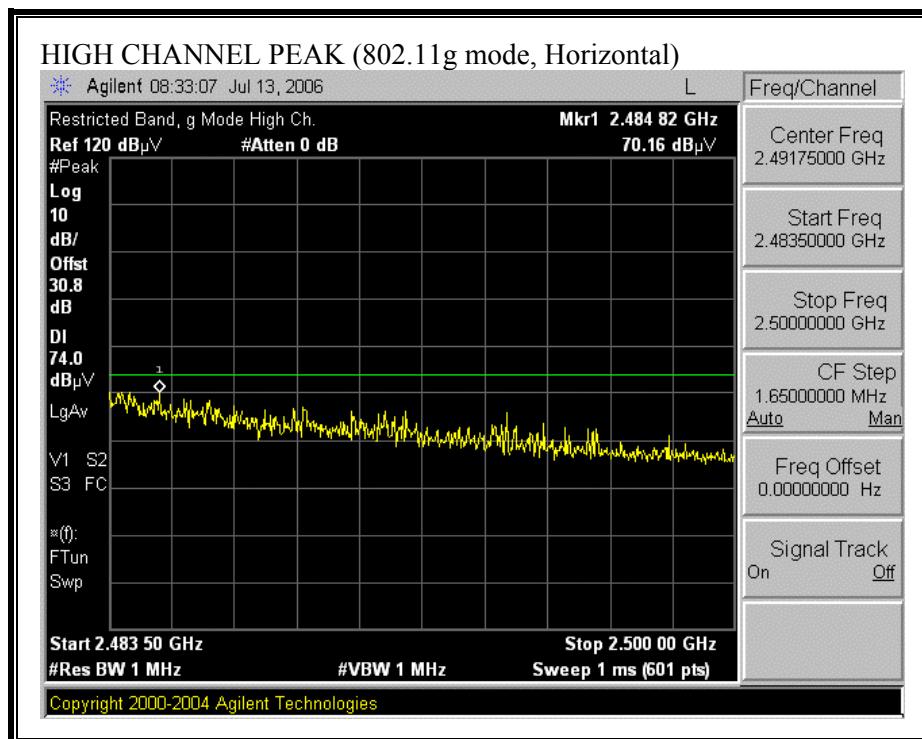

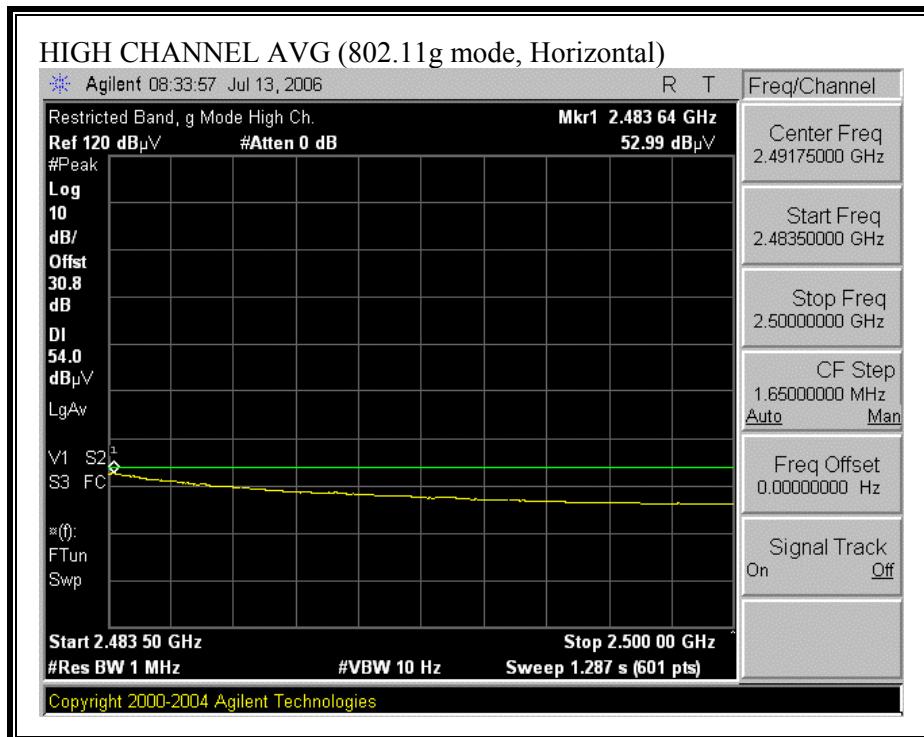

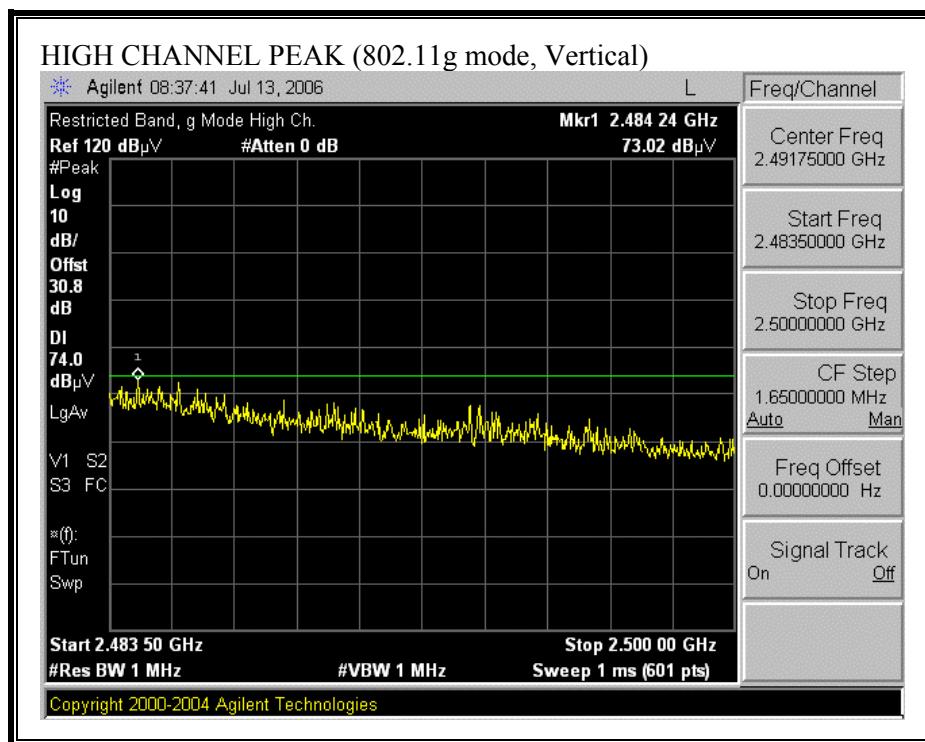


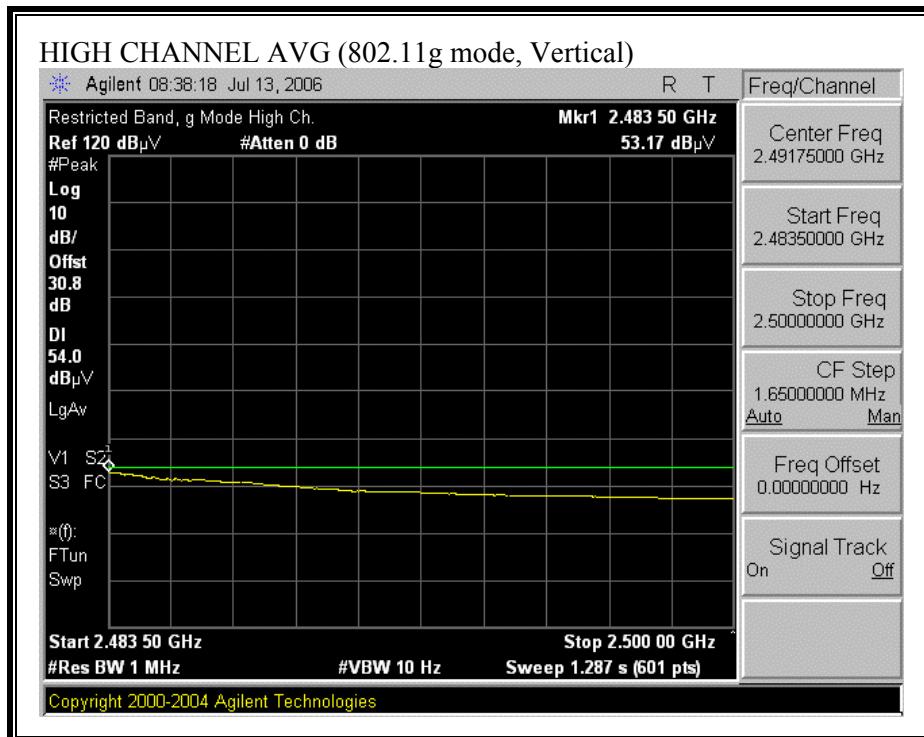



**HARMONICS AND SPURIOUS EMISSIONS (802.11g MODE)**


07/24/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: William Zhuang Project #: 06U10333 Company: Apple Computers Inc. EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type EUT M/N: A1143 Test Target: Mode Oper: Tx On, g Mode															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss	HPF	High Pass Filter												
f	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>High Ch. 2462MHz, 16dBm</b>															
4.924	3.0	44.1	32.4	33.1	3.6	-36.5	0.0	0.6	45.0	33.3	74.0	54.0	-29.0	-20.7	V
4.924	3.0	41.8	30.5	33.1	3.6	-36.5	0.0	0.6	42.7	31.4	74.0	54.0	-31.3	-22.6	H
7.386	3.0	43.1	30.3	35.4	4.3	-36.2	0.0	0.6	52.1	35.5	74.0	54.0	-21.9	-18.5	H
7.386	3.0	42.0	30.2	35.4	4.3	-36.2	0.0	0.6	49.3	35.1	74.0	54.0	-24.7	-18.9	V
<b>Mid Ch. 2437MHz, 21 dBm</b>															
4.874	3.0	48.6	37.4	33.1	3.6	-36.5	0.0	0.6	49.5	38.2	74.0	54.0	-24.5	-15.8	V
4.874	3.0	49.7	38.2	33.1	3.6	-36.5	0.0	0.6	50.6	39.1	74.0	54.0	-23.4	-14.9	H
7.311	3.0	50.7	35.2	35.5	4.4	-36.2	0.0	0.6	55.0	39.4	74.0	54.0	-19.0	-14.6	H
7.311	3.0	52.6	36.1	35.5	4.4	-36.2	0.0	0.6	56.9	40.3	74.0	54.0	-17.1	-13.7	V
<b>Low Ch. 2412MHz, 17dBm</b>															
4.824	3.0	42.3	30.1	33.0	3.6	-36.5	0.0	0.6	43.0	30.8	74.0	54.0	-31.0	-23.2	V
4.824	3.0	41.9	30.1	33.0	3.6	-36.5	0.0	0.6	42.6	30.8	74.0	54.0	-31.4	-23.2	H
7.236	3.0	48.0	31.3	35.4	4.3	-36.2	0.0	0.6	52.1	35.5	74.0	54.0	-21.9	-18.5	H
7.236	3.0	45.2	31.0	35.4	4.3	-36.2	0.0	0.6	49.3	35.1	74.0	54.0	-24.7	-18.9	V

**RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)**

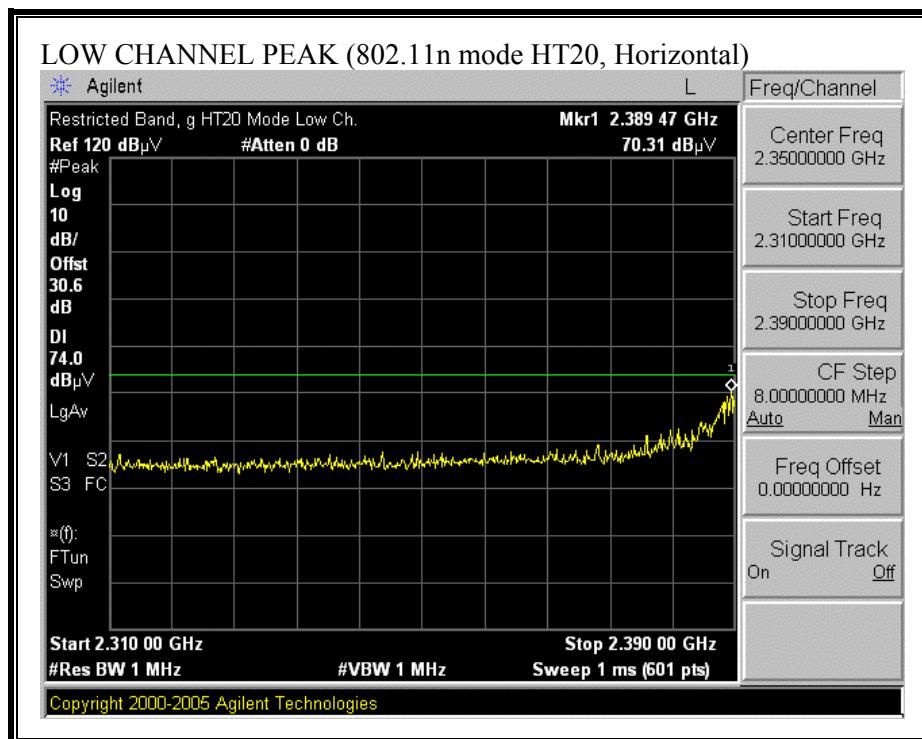


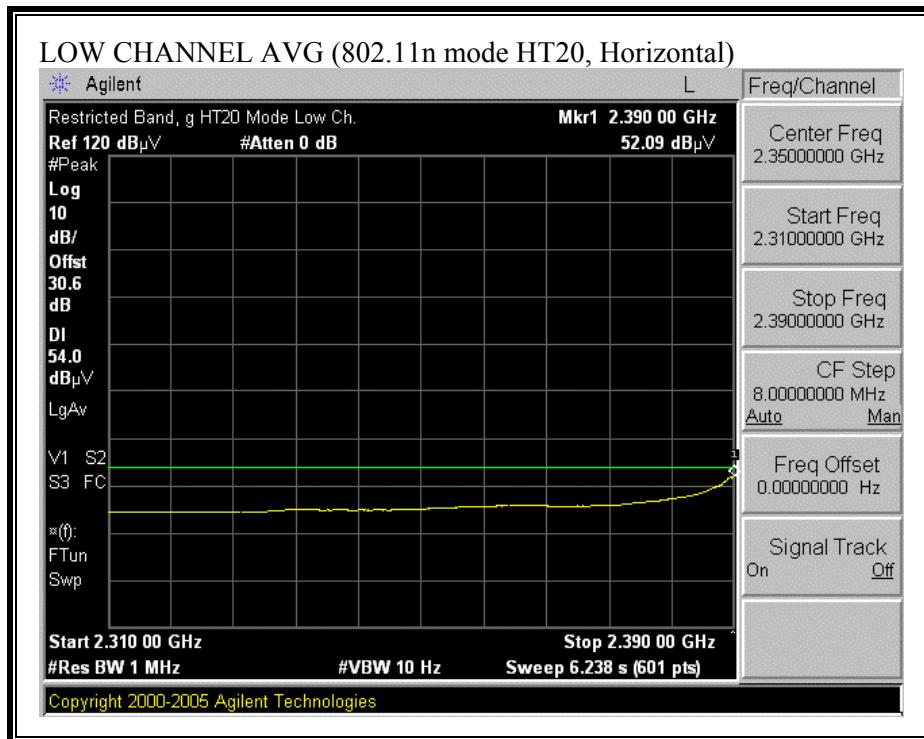


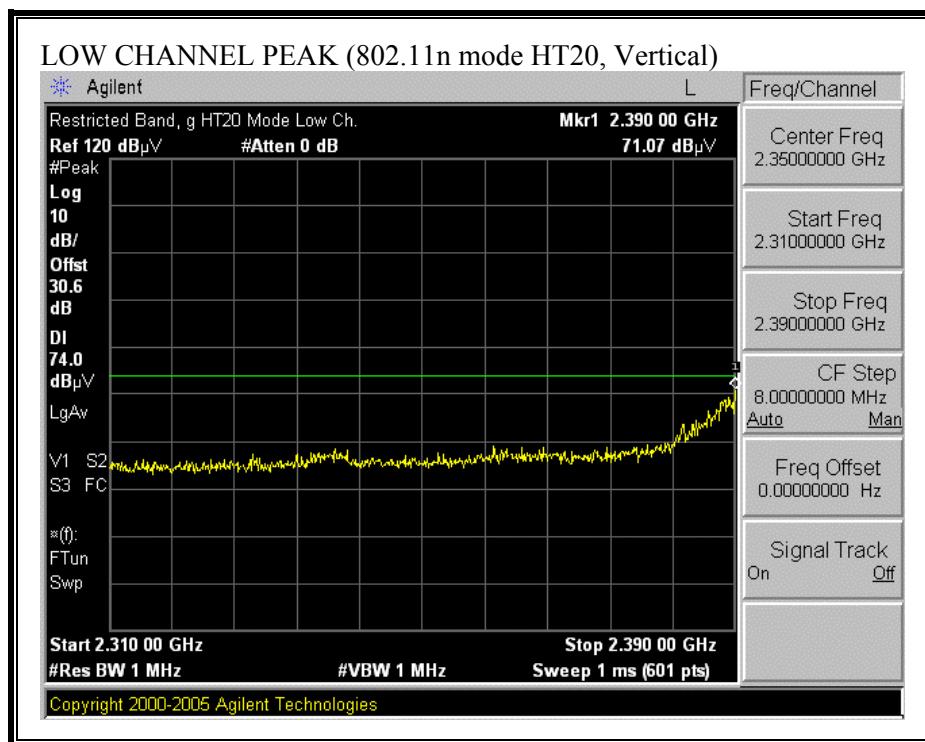


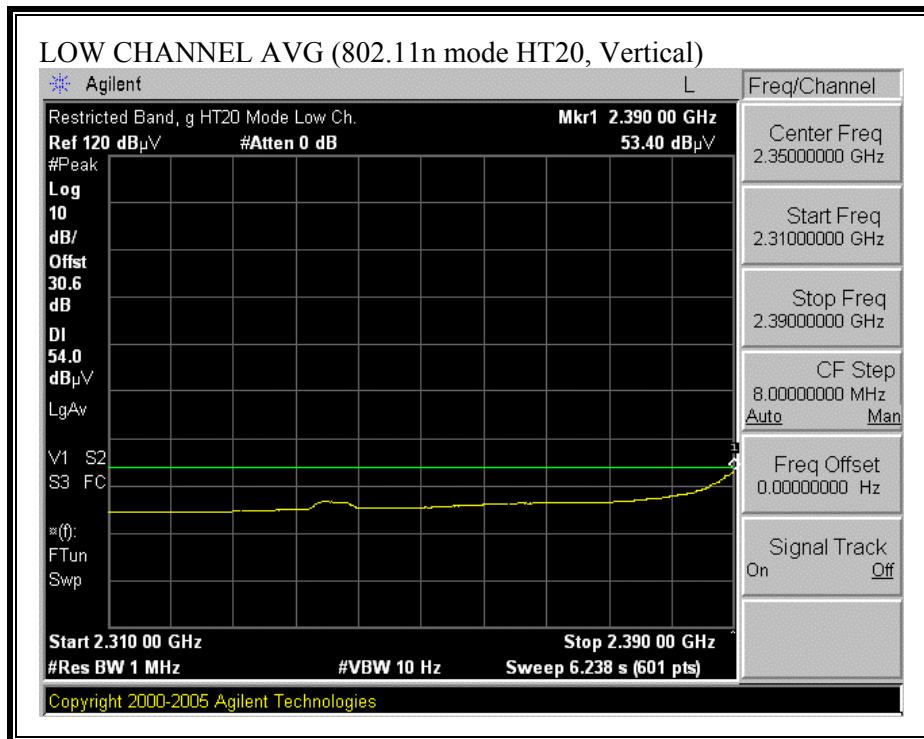


**RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)**

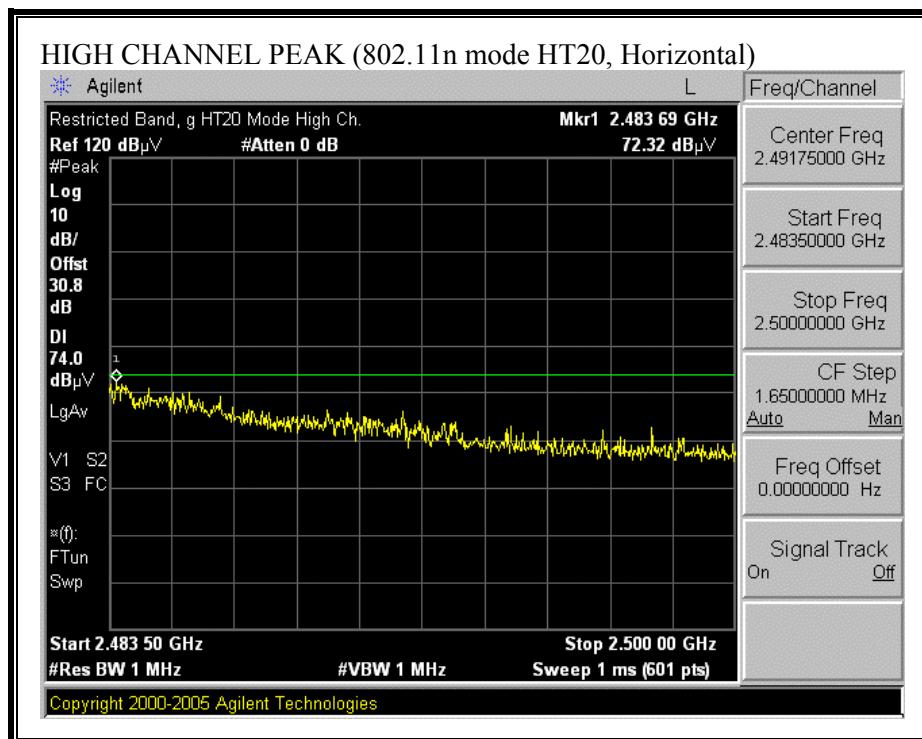

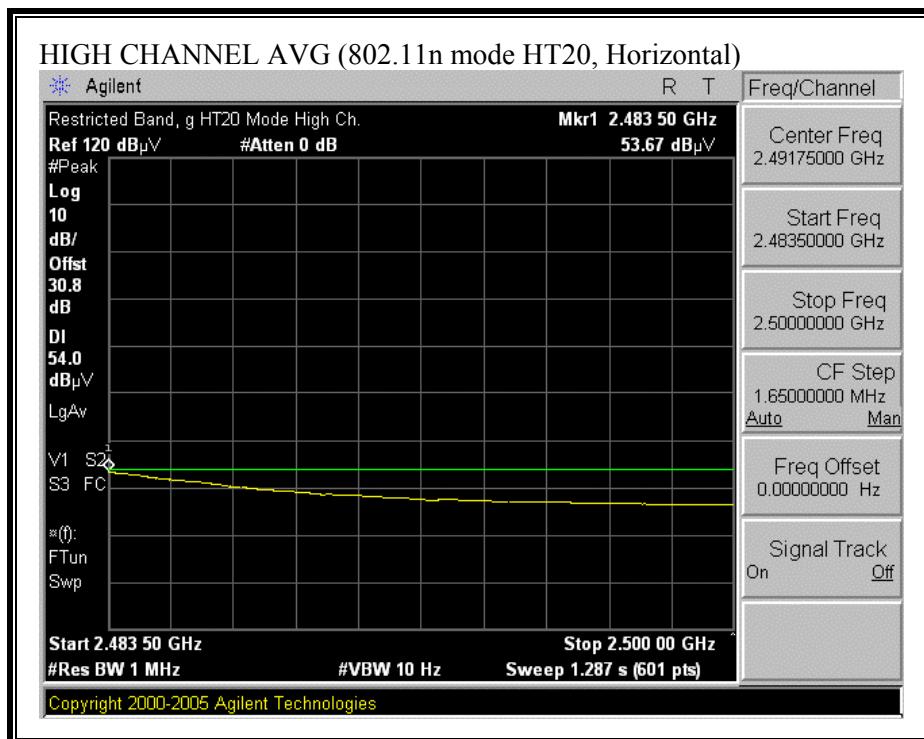

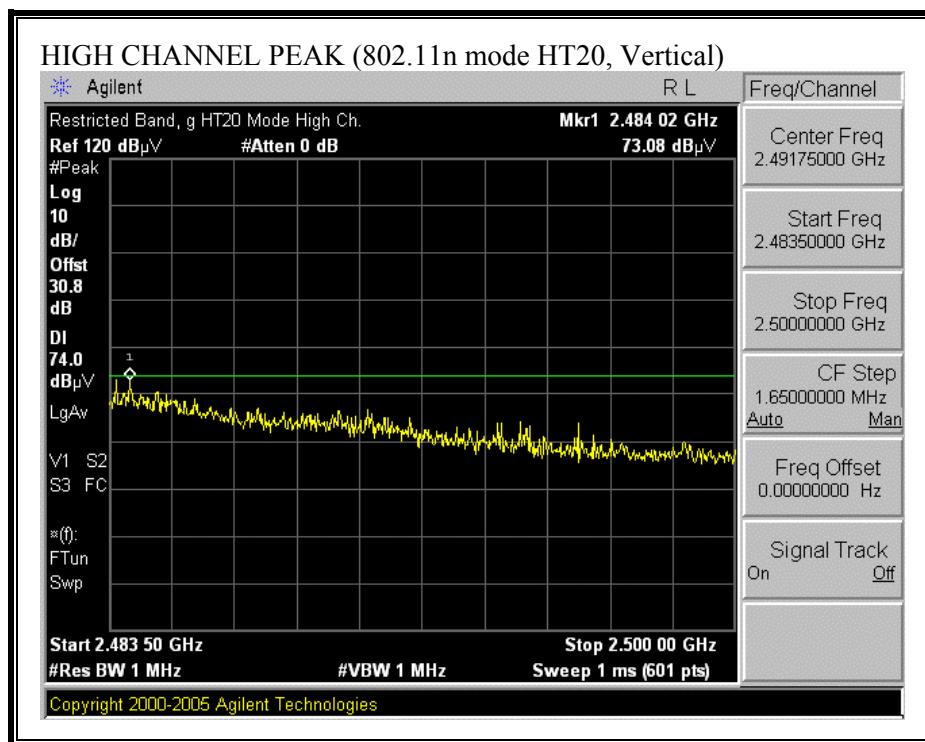

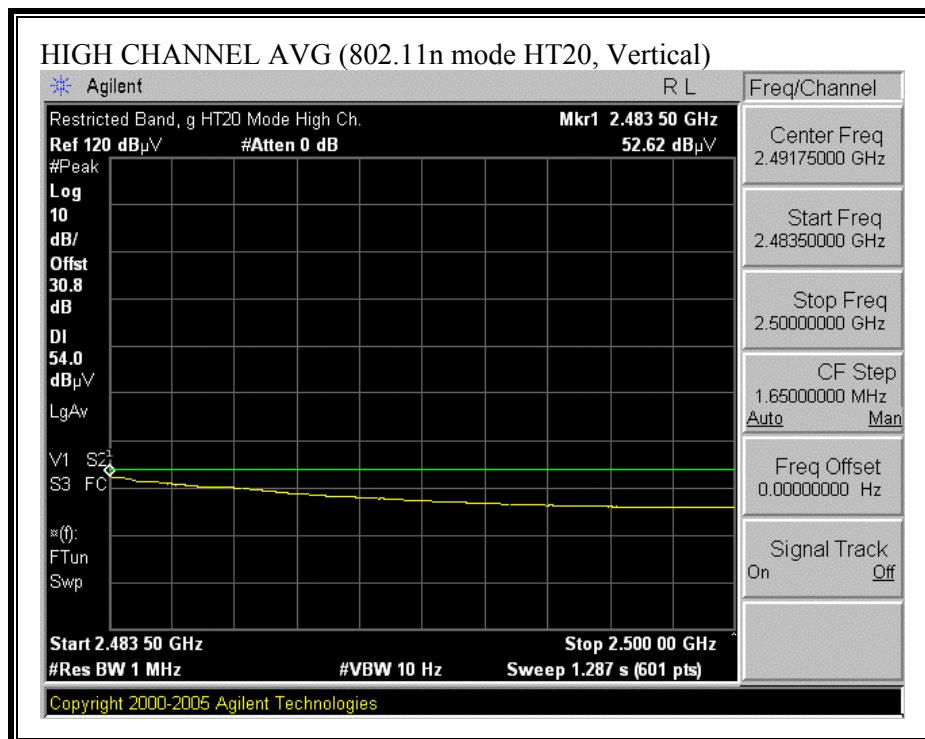


**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)**


08/03/06 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site


Test Engr: William Zhuang  
 Project #: 06U10333  
 Company: Apple Computers Inc.  
 EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type  
 EUT M/N: A1143  
 Test Target:  
 Mode Oper: Tx On, g HT20 Mode MCS2, 2.4GHz


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		
Low Ch. 2412MHz, Art: 15dBm					
4.824	3.0	51.5	39.0	33.0	3.6
				3.6	-45.3
				0.0	0.6
				43.4	31.0
				74.0	54.0
				54.0	-30.6
					-23.0
V					
4.824	3.0	50.9	39.0	33.0	3.6
				3.6	-45.3
				0.0	0.6
				42.9	31.0
				74.0	54.0
				54.0	-31.1
					-23.0
H					
Mid Ch. 2437MHz, Art: 21dBm					
4.874	3.0	59.0	46.1	33.1	3.6
				3.6	-45.3
				0.0	0.6
				50.9	38.0
				74.0	54.0
				54.0	-23.1
					-16.0
V					
4.874	3.0	56.3	44.9	33.1	3.6
				3.6	-45.3
				0.0	0.6
				48.3	36.9
				74.0	54.0
				54.0	-25.7
					-17.1
H					
7.311	3.0	68.1	50.8	35.5	4.4
				4.4	-43.2
				0.0	0.6
				65.3	48.0
				74.0	54.0
				54.0	-8.7
					-6.0
V					
7.311	3.0	61.4	45.4	35.5	4.4
				4.4	-43.2
				0.0	0.6
				58.7	42.7
				74.0	54.0
				54.0	-15.3
					-11.3
H					
9.748	3.0	47.7	36.1	37.2	5.0
				5.0	-39.6
				0.0	0.8
				51.1	39.6
				74.0	54.0
				54.0	-22.9
					-14.4
V					
9.748	3.0	47.0	35.3	37.2	5.0
				5.0	-39.6
				0.0	0.8
				50.4	38.8
				74.0	54.0
				54.0	-23.6
					-15.2
H					
High Ch. 2462MHz, Art: 15.5dBm					
4.924	3.0	52.3	41.6	33.1	3.6
				3.6	-45.4
				0.0	0.6
				44.3	33.6
				74.0	54.0
				54.0	-29.7
					-20.4
V					
4.924	3.0	51.3	39.5	33.1	3.6
				3.6	-45.4
				0.0	0.6
				43.3	31.5
				74.0	54.0
				54.0	-30.7
					-22.5
H					

**RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)**

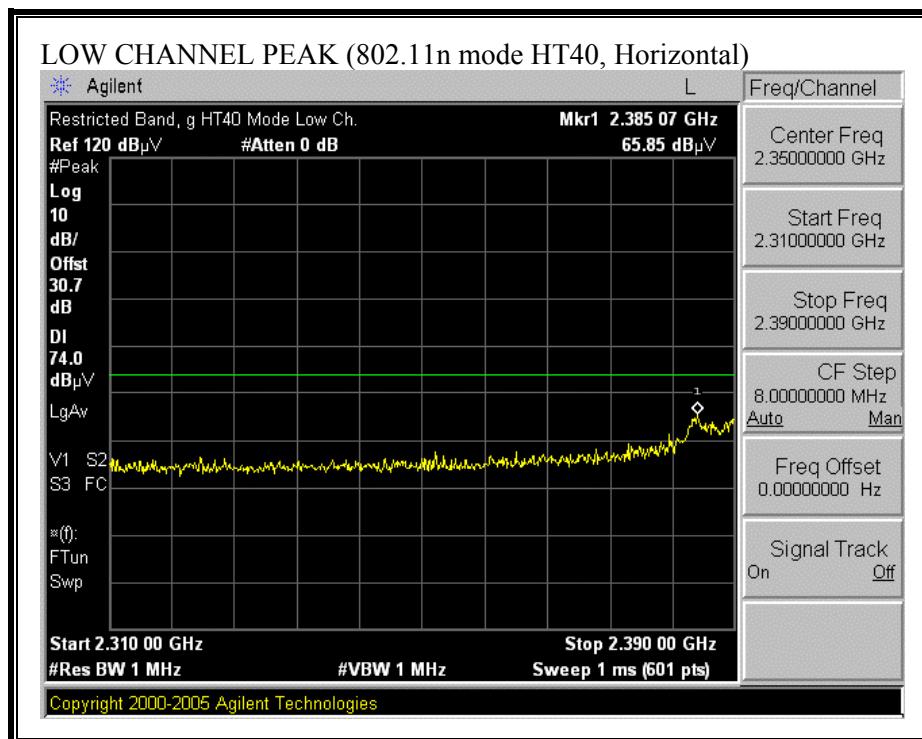


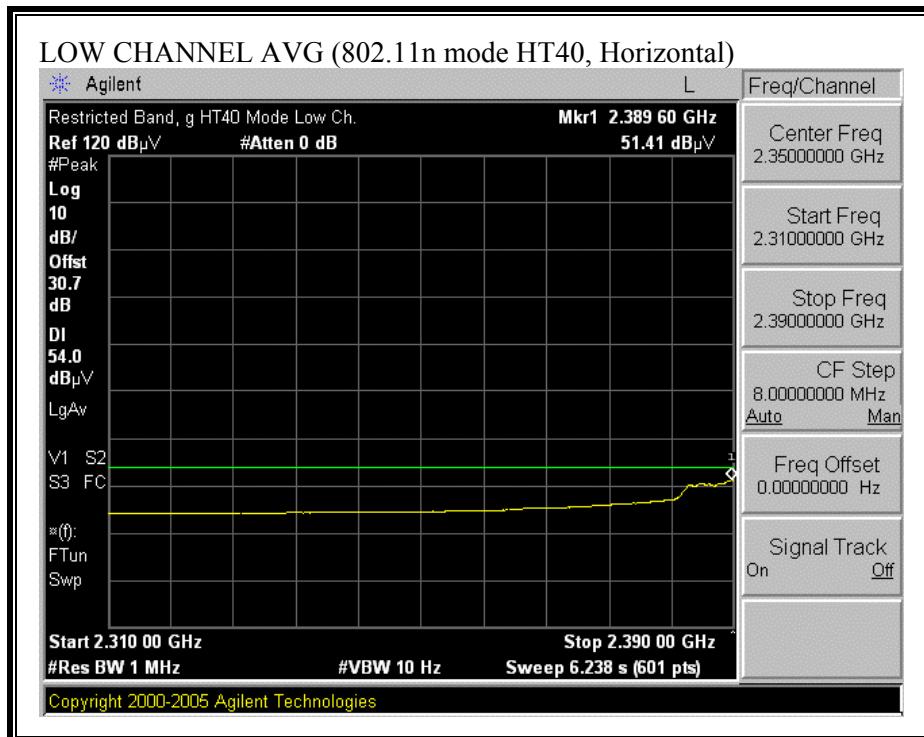


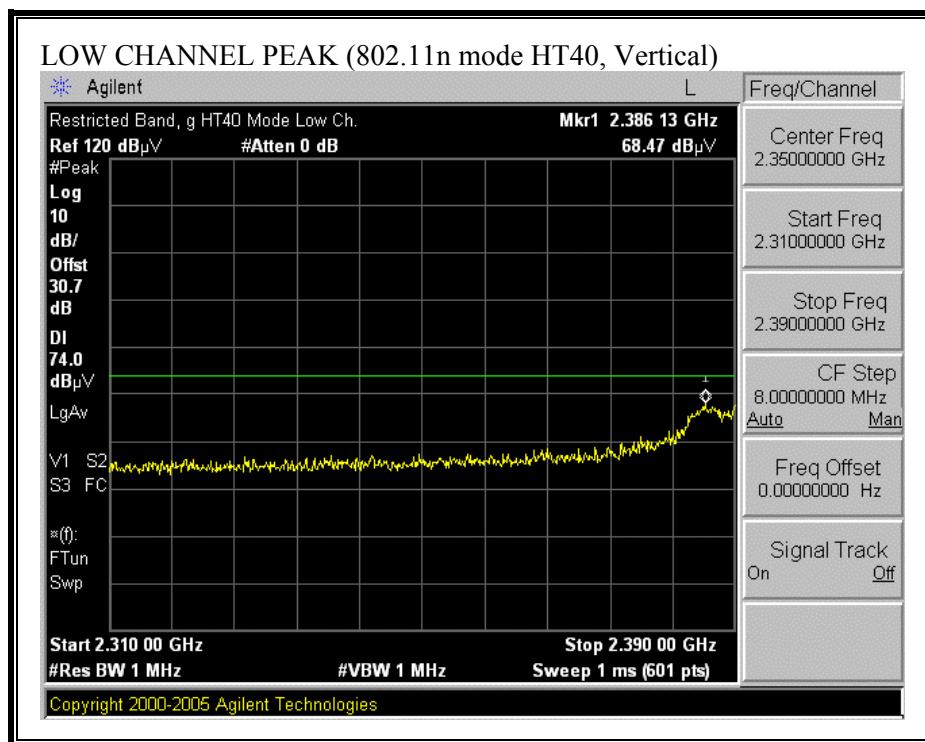


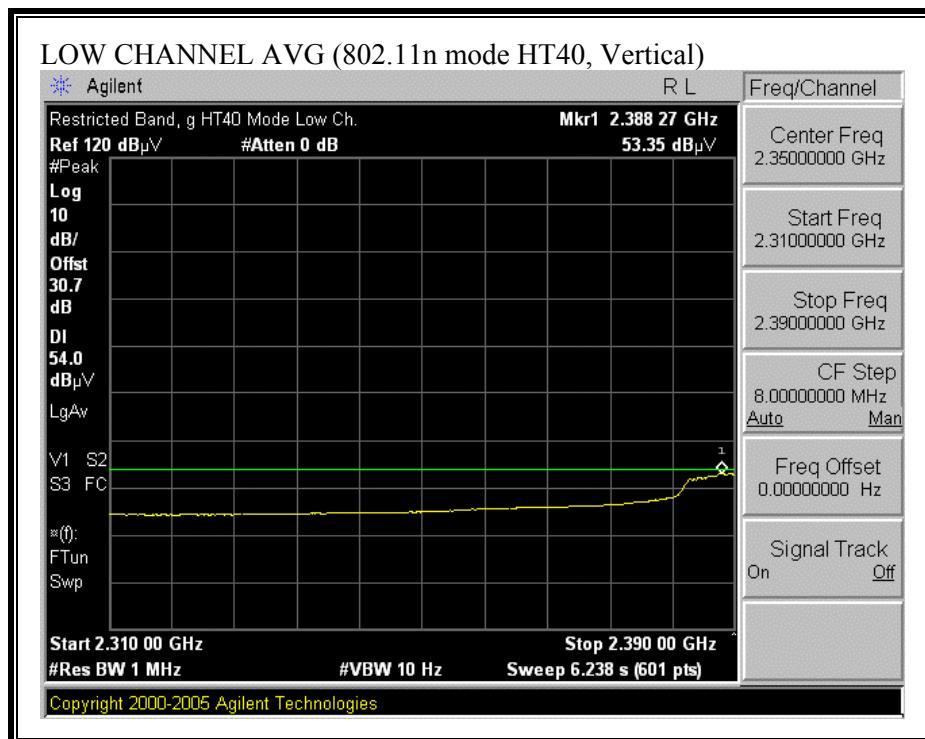


**RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)**

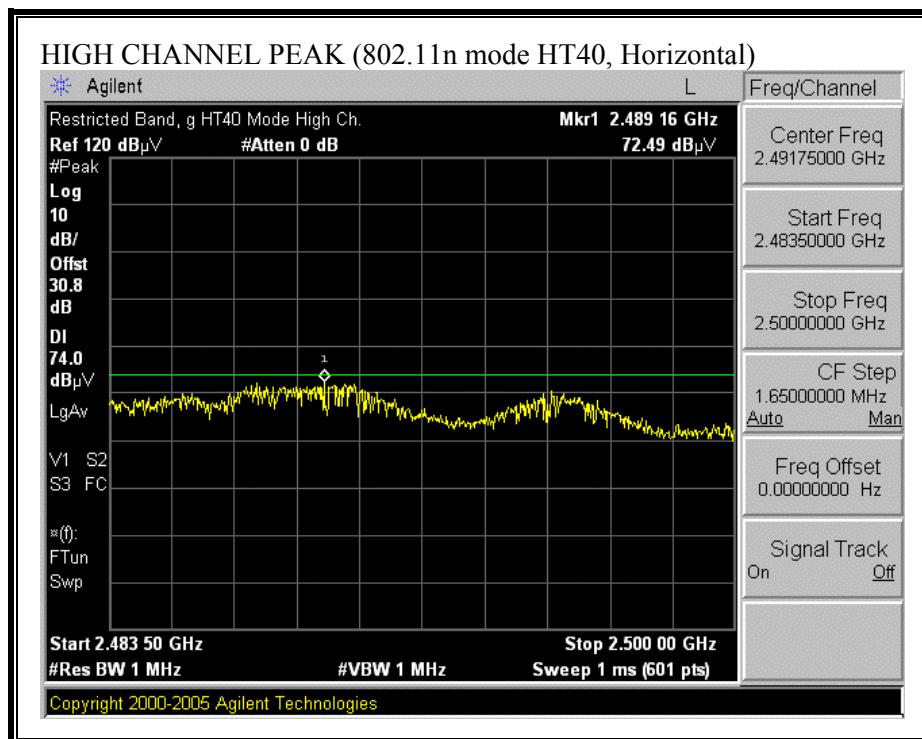

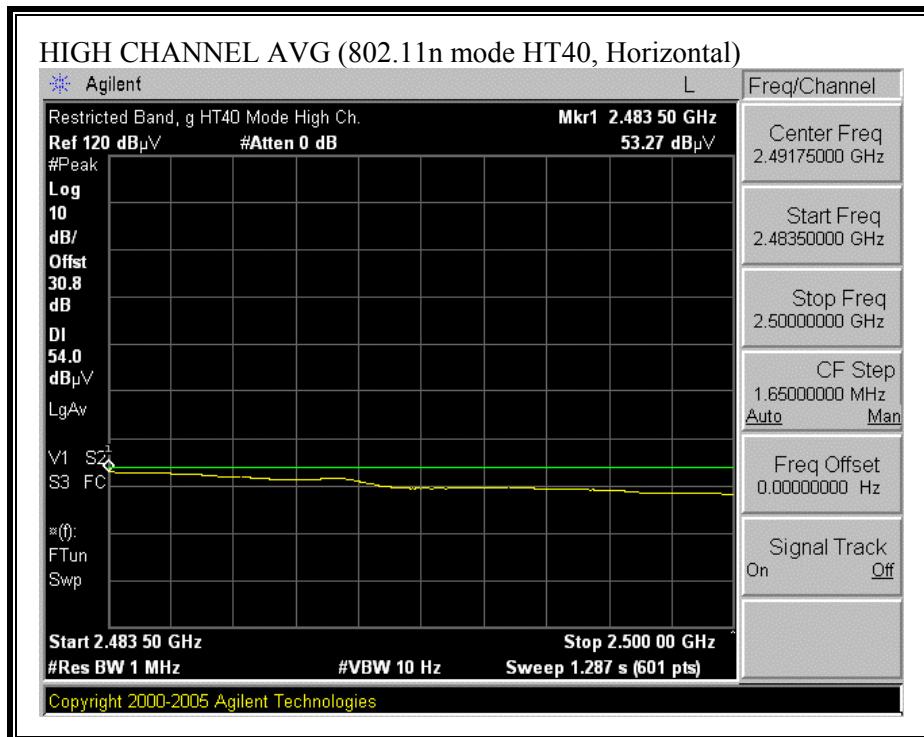

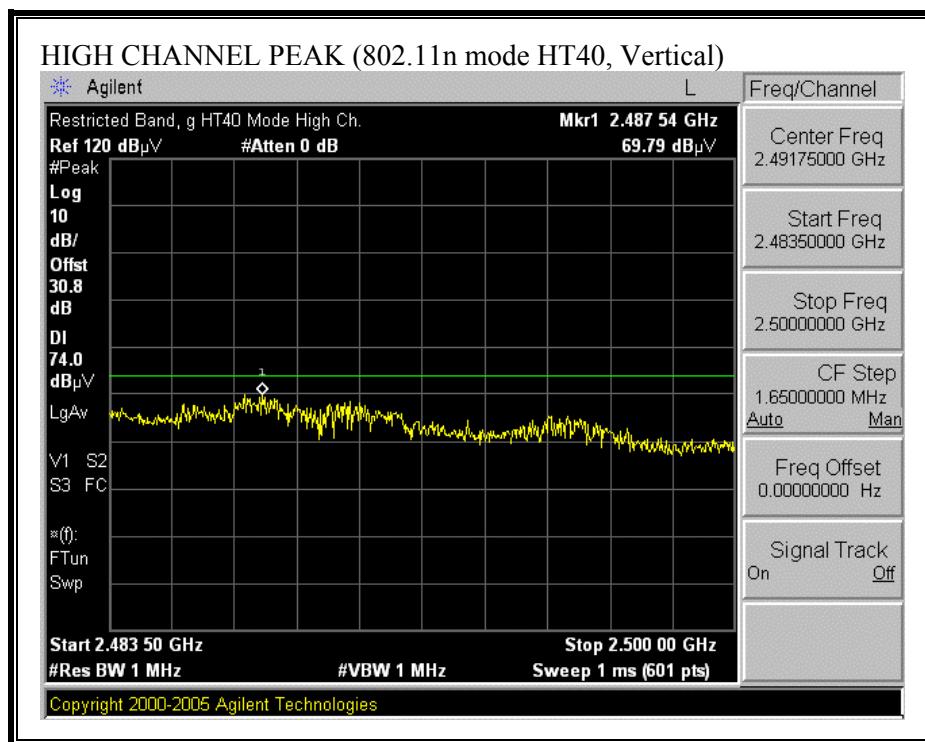

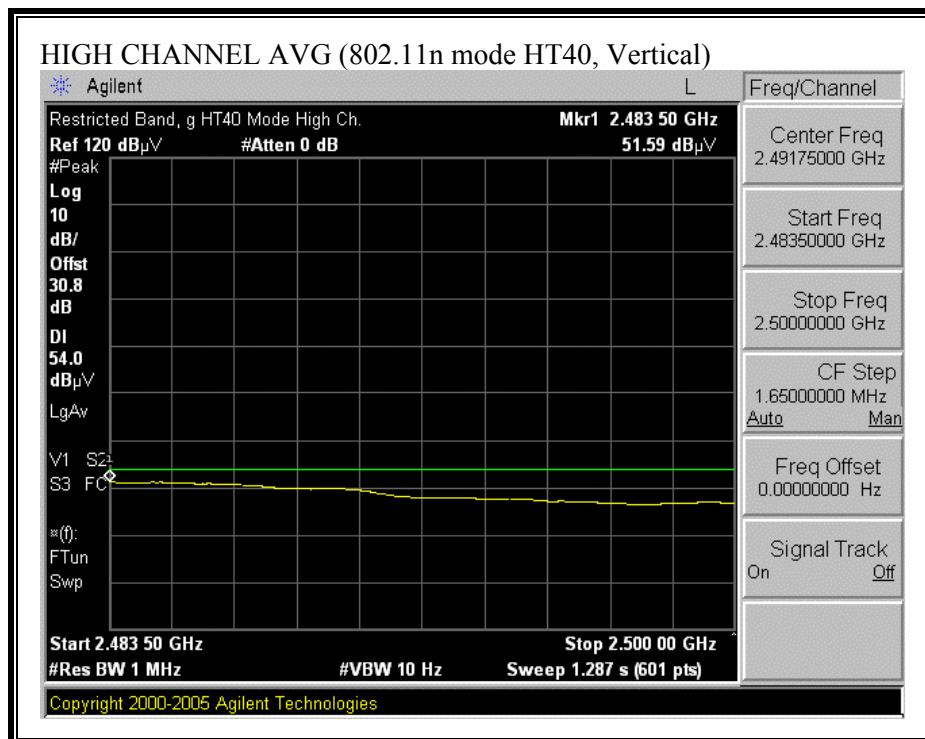

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)**

08/03/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: William Zhuang Project #: 06U10333 Company: Apple Computers Inc. EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type EUT M/N: A1143 Test Target: Mode Oper: Tx On, g HT40 Mode MCS10, 2.4GHz															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss	HPF	High Pass Filter												
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Ch. 2422MHz, Art: 10.5dBm</b>															
4.844	3.0	51.8	39.5	33.0	3.6	-45.3	0.0	0.6	43.7	31.4	74.0	54.0	-30.3	-22.6	V
4.844	3.0	51.6	39.4	33.0	3.6	-45.3	0.0	0.6	43.6	31.4	74.0	54.0	-30.4	-22.6	H
<b>Mid Ch. 2437MHz, Art: 16.5dBm</b>															
4.874	3.0	52.0	40.0	33.1	3.6	-45.3	0.0	0.6	44.0	32.0	74.0	54.0	-30.0	-22.0	V
4.874	3.0	51.9	39.6	33.1	3.6	-45.3	0.0	0.6	43.8	31.6	74.0	54.0	-30.2	-22.4	H
<b>High Ch. 2452MHz, Art: 14.5dBm</b>															
4.904	3.0	51.8	39.3	33.1	3.6	-45.3	0.0	0.6	43.8	31.3	74.0	54.0	-30.2	-22.7	V
4.904	3.0	50.9	39.3	33.1	3.6	-45.3	0.0	0.6	42.9	31.3	74.0	54.0	-31.1	-22.7	H

### 7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

07/26/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																			
Test Engr: William Zhuang Project #: 06U10333 Company: Apple Computers Inc. EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type EUT M/N: A1143 Test Target: Mode Oper: Tx On, a Mode, 6 Mbps, 5.8 GHz																			
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter																
<b>Low Ch. 5745MHz, 21dBm</b>																			
11.490	3.0	51.8	38.8	37.4	5.3	-35.9	0.0	0.7	59.3	46.3	74.0	54.0	-14.7	-7.7				V	
11.490	3.0	51.7	39.9	37.4	5.3	-35.9	0.0	0.7	59.2	47.4	74.0	54.0	-14.8	-6.6				H	
<b>Mid Ch. 5785MHz, 21dBm</b>																			
11.570	3.0	51.0	38.9	37.4	5.3	-35.8	0.0	0.7	58.6	46.5	74.0	54.0	-15.4	-7.5				V	
11.570	3.0	50.8	38.5	37.4	5.3	-35.8	0.0	0.7	58.3	46.1	74.0	54.0	-15.7	-7.9				H	
<b>High Ch. 5825MHz, 21dBm</b>																			
11.650	3.0	49.2	37.8	37.4	5.3	-35.7	0.0	0.7	56.9	45.5	74.0	54.0	-17.1	-8.5				V	
11.650	3.0	51.5	38.8	37.4	5.3	-35.7	0.0	0.7	59.2	46.5	74.0	54.0	-14.8	-7.5				H	

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)**

07/26/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
<p>Test Engr: William Zhuang  Project #: 06U10333  Company: Apple Computers Inc.  EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type  EUT M/N: A1143  Test Target:  Mode Oper: Tx On, a HT20 Mode, MCS0, 5.8GHz</p>															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss	HPF	High Pass Filter												
GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Ch. 5745MHz, 21dBm</b>															
11.490	3.0	49.5	38.0	37.4	5.3	-35.9	0.0	0.7	57.0	45.5	74.0	54.0	-17.0	-8.5	V
11.490	3.0	50.0	38.5	37.4	5.3	-35.9	0.0	0.7	57.5	46.0	74.0	54.0	-16.5	-8.0	H
<b>Mid Ch. 5785MHz, 21dBm</b>															
11.570	3.0	49.9	38.0	37.4	5.3	-35.8	0.0	0.7	57.5	45.6	74.0	54.0	-16.5	-8.4	H
11.570	3.0	49.0	37.5	37.4	5.3	-35.8	0.0	0.7	56.6	45.1	74.0	54.0	-17.4	-8.9	V
<b>High Ch. 5825MHz, 21dBm</b>															
11.650	3.0	47.7	35.6	37.4	5.3	-35.7	0.0	0.7	55.4	43.2	74.0	54.0	-18.6	-10.8	V
11.650	3.0	51.3	39.6	37.4	5.3	-35.7	0.0	0.7	59.0	47.3	74.0	54.0	-15.0	-6.7	H

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)**

07/26/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site														
Test Engr: William Zhuang Project #: 06U10333 Company: Apple Computers Inc. EUT Descrip: 802.11 a/b/g/n Access Point w/1 Antenna Type EUT M/N: A1143 Test Target: Mode Oper: Tx On, a HT40 Mode, MCS0, 5.8GHz														
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Pk Lim	Peak Field Strength Limit	Avg Mar	Margin vs. Average Limit	Pk Mar	Margin vs. Peak Limit	Notes	(V/H)	
GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB
<b>Low Ch. 5755MHz, 21dBm</b>														
11.510	3.0	46.0	35.1	37.4	5.3	-35.8	0.0	0.7	53.5	42.7	74.0	54.0	-20.5	-11.3
11.510	3.0	47.6	36.0	37.4	5.3	-35.8	0.0	0.7	55.2	43.5	74.0	54.0	-18.8	-10.5
<b>Mid Ch. 5795MHz, 21dBm</b>														
11.590	3.0	48.7	35.6	37.4	5.3	-35.8	0.0	0.7	56.3	43.2	74.0	54.0	-17.7	-10.8
11.590	3.0	44.8	33.7	37.4	5.3	-35.8	0.0	0.7	52.5	41.3	74.0	54.0	-21.5	-12.7
<b>High Ch. 5815MHz, 21dBm</b>														
11.630	3.0	46.2	33.9	37.4	5.3	-35.7	0.0	0.7	53.9	41.6	74.0	54.0	-20.1	-12.4
11.630	3.0	48.2	36.1	37.4	5.3	-35.7	0.0	0.7	55.8	43.8	74.0	54.0	-18.2	-10.2

### 7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

##### HORIZONTAL DATA



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 6 File#: apple.EMI Date: 08-01-2006 Time: 14:55:56

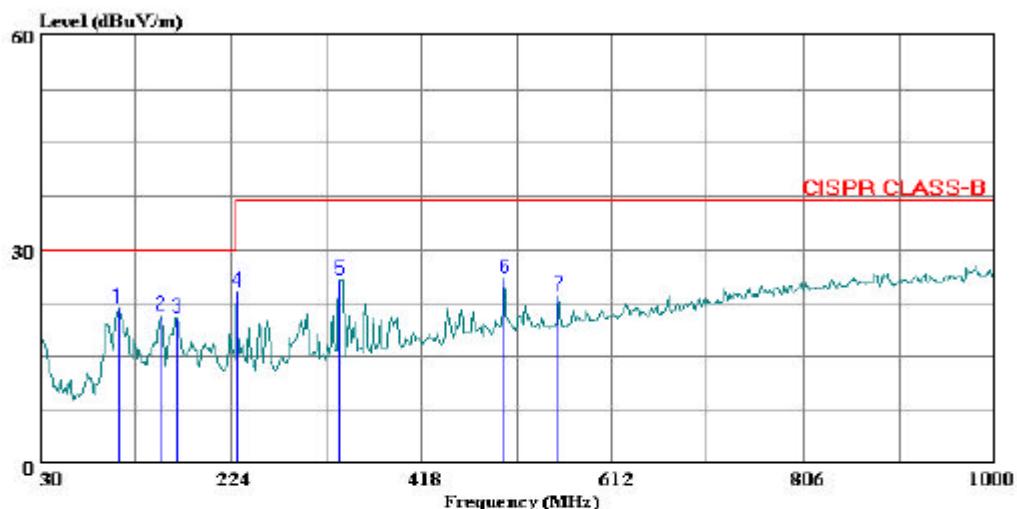

(Audit ATC)  
Trace: 5

Ref Trace:

Condition: CISPR CLASS-B HORIZONTAL  
Test Operator: : Chin Pang  
Company: : Apple  
Project #: : 06U10333  
Configuration: : EUT/Laptop  
Mode of Operation: TX

Page: 1

Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	109.540	8.33	13.44	21.77	30.00 -8.24 Peak
2	153.190	6.78	14.03	20.81	30.00 -9.19 Peak
3	169.680	6.89	13.40	20.29	30.00 -9.71 Peak
4	230.790	10.97	13.08	24.05	37.00 -12.95 Peak
5	335.550	9.13	16.55	25.68	37.00 -11.32 Peak
6	502.390	5.77	20.24	26.01	37.00 -10.99 Peak
7	557.680	2.58	20.92	23.50	37.00 -13.50 Peak




**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

VERTICAL DATA



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 4 File#: apple.EMI Date: 08-01-2006 Time: 14:48:31

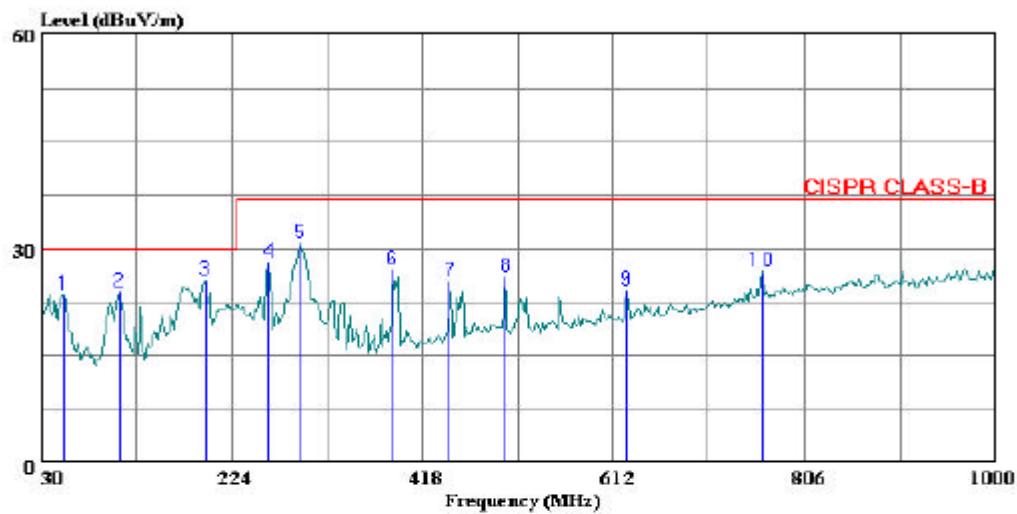

(Audit ATC)

Trace: 3

Ref Trace:

Condition: CISPR CLASS-B VERTICAL  
Test Operator: : Chin Pang  
Company: : Apple  
Project #: : 06U10333  
Configuration: : EUT/Laptop  
Mode of Operation: TX

Page: 1

Freq	Read		Limit	Over	Line	Limit	Remark
	MHz	dBuV	Factor	Level	dBuV/m	dBuV/m	
1	53.280	14.61	8.94	23.55	30.00	-6.45	Peak
2	109.540	10.54	13.44	23.98	30.00	-6.03	Peak
3	196.840	11.55	14.00	25.55	30.00	-4.45	Peak
4	261.830	13.59	14.35	27.94	37.00	-9.06	Peak
5	293.840	15.29	15.42	30.71	37.00	-6.29	Peak
6	387.930	9.18	17.77	26.95	37.00	-10.05	Peak
7	446.130	6.33	19.09	25.42	37.00	-11.58	Peak
8	502.390	5.65	20.24	25.89	37.00	-11.11	Peak
9	625.580	2.09	21.95	24.04	37.00	-12.96	Peak
10	761.380	2.85	24.02	26.87	37.00	-10.13	Peak

## 7.4. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:

**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.20	47.50	--	--	0.00	63.69	53.69	-16.19	-6.19	L1
0.40	36.98	--	--	0.00	57.85	47.85	-20.87	-10.87	L1
4.34	35.76	--	--	0.00	56.00	46.00	-20.24	-10.24	L1
0.20	46.80	--	--	0.00	63.69	53.69	-16.89	-6.89	L2
0.40	36.50	--	--	0.00	57.85	47.85	-21.35	-11.35	L2
6.06	33.48	--	--	0.00	60.00	50.00	-26.52	-16.52	L2
6 Worst Data									

**LINE 1 RESULTS**

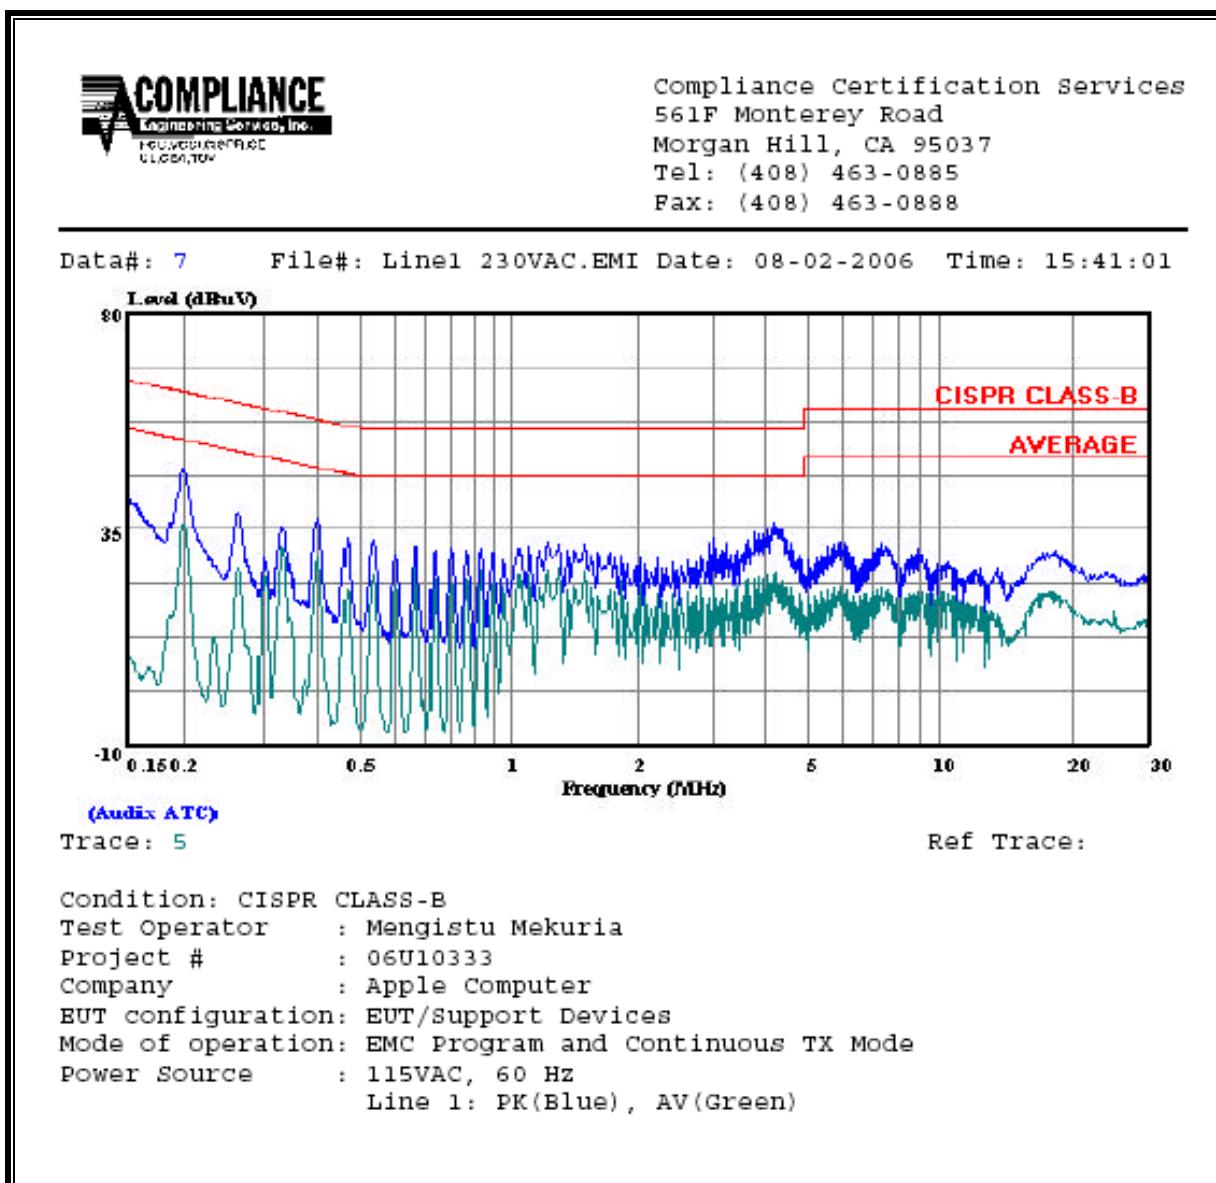

**LINE 2 RESULTS**

