



FCC CFR47 PART 15 SUBPART C
FCC CFR47 PART 15 SUBPART B
INDUSTRY CANADA RSS-210 ISSUE 7
INDUSTRY CANADA RSS-GEN Issue 2

CERTIFICATION TEST REPORT

FOR

BLUETOOTH DEVICE

MODEL NUMBER: A1296

**FCC ID: BCGA1296
IC: 579C-A1296**

REPORT NUMBER: 08U12220-1, Revision B

ISSUE DATE: JUNE 09, 2009

Prepared for
APPLE INC.
1 INFINITE LOOP
CUPERTINO, CALIFORNIA 95014, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	03/12/09	Initial Issue	F. Ibrahim
A	06/05/09	Revised EUT	A. Zaffar
B	06/09/09	Revised Description of EUT, revised Setup Diagram, and radiated emission data below 1 GHz	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>6</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS (GFSK MODULATION).....	10
7.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>10</i>
7.2. <i>HOPPING FREQUENCY SEPARATION.....</i>	<i>14</i>
7.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>16</i>
7.4. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>21</i>
7.5. <i>OUTPUT POWER.....</i>	<i>26</i>
7.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>30</i>
8. RADIATED TEST RESULTS (GFSK MODULATION).....	39
8.1. <i>LIMITS AND PROCEDURE</i>	<i>39</i>
8.2. <i>TRANSMITTER ABOVE 1 GHz</i>	<i>40</i>
8.3. <i>RECEIVER ABOVE 1 GHz</i>	<i>49</i>
8.4. <i>WORST-CASE BELOW 1 GHz (RADIO AND DIGITAL)</i>	<i>50</i>
9. MAXIMUM PERMISSIBLE EXPOSURE.....	54
10. SETUP PHOTOS	58

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITY LOOP
CUPERTINO, CALIFORNIA 95014, U.S.A.

EUT DESCRIPTION: BLUETOOTH DEVICE

MODEL: A1296

SERIAL NUMBER: 00-1f-f3-fa-5e-1a

DATE TESTED: MARCH 10-11, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
CFR 47 Part 15 Subpart B	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



THANH NGUYEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth Device.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	4.53	2.84

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA PCB antenna, with a maximum gain of -2 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Version 101.

The EUT driver software installed in the support Laptop PC during testing was NemoBlue V 1.22

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case data rate for each mode is determined to be as follows, based on input from the manufacturer of the radio:

All final tests in the GFSK mode were made at 1 Mb/s.

For radiated emissions below 1 GHz, the channel with highest power was used; this was determined to be High Channel, at a data rate of 1 Mbps and at normal position.

The EUT was set to 100% duty cycle as worst-case and all testing was performed with this duty cycle except for average time of occupancy, DH1 and DH3 data packets were used for average time of occupancy test.

5.6. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Printer	Microline 186	D22300A	AE5A048148A0	DoC
External Floppy Drive	Mitsumi	D353FUE	717700 3M11HT0282	DoC
Laptop	Apple	MacBook	PT358811	DoC
AC/DC Adapter	Celetronix	A56	611-0394	DoC

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	3	US 115V	Un-shielded	2 m	N/A
2	DC	1	DC plug	Shielded	1.5 m	N/A

SETUP DIAGRAM FOR TESTS

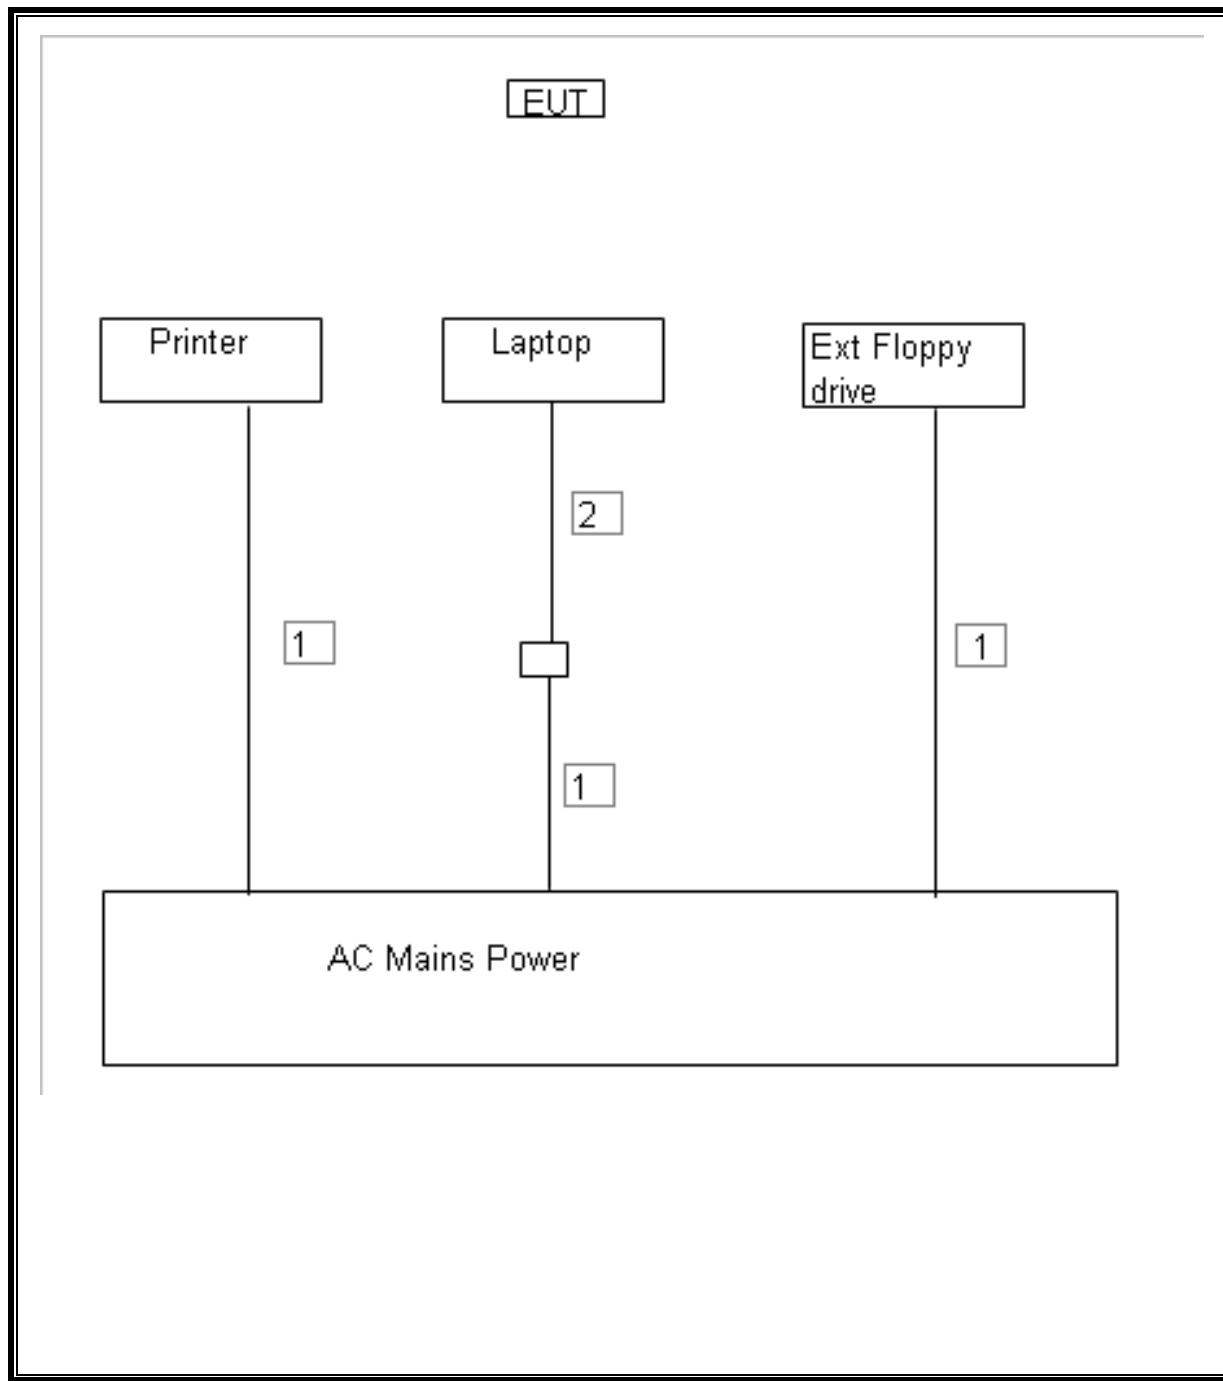

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4407B	C01098	11/07/08	02/07/10
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	12/01/08	12/01/09
Horn Antenna	EMCO	3115	C00872	04/22/08	04/22/09
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01161	08/06/08	08/06/09
Power Meter	Agilent / HP	437B	N02778	11/04/08	08/04/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/09	01/14/10
Power Sensor, 18 GHz	Agilent / HP	8481A	N02784	04/22/08	10/22/09
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/09	01/14/10
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	09/29/07	11/29/09

7. ANTENNA PORT TEST RESULTS (GFSK MODULATION)

7.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.010	1.0031
Middle	2441	1.010	1.0032
High	2480	1.015	1.0027

20 dB AND 99% BANDWIDTH

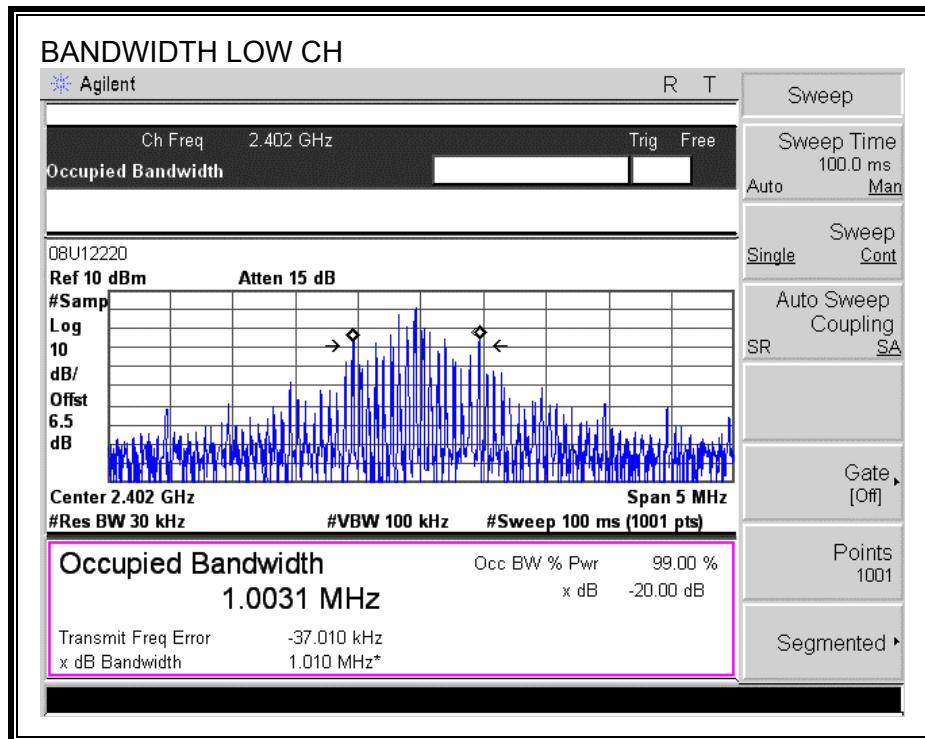

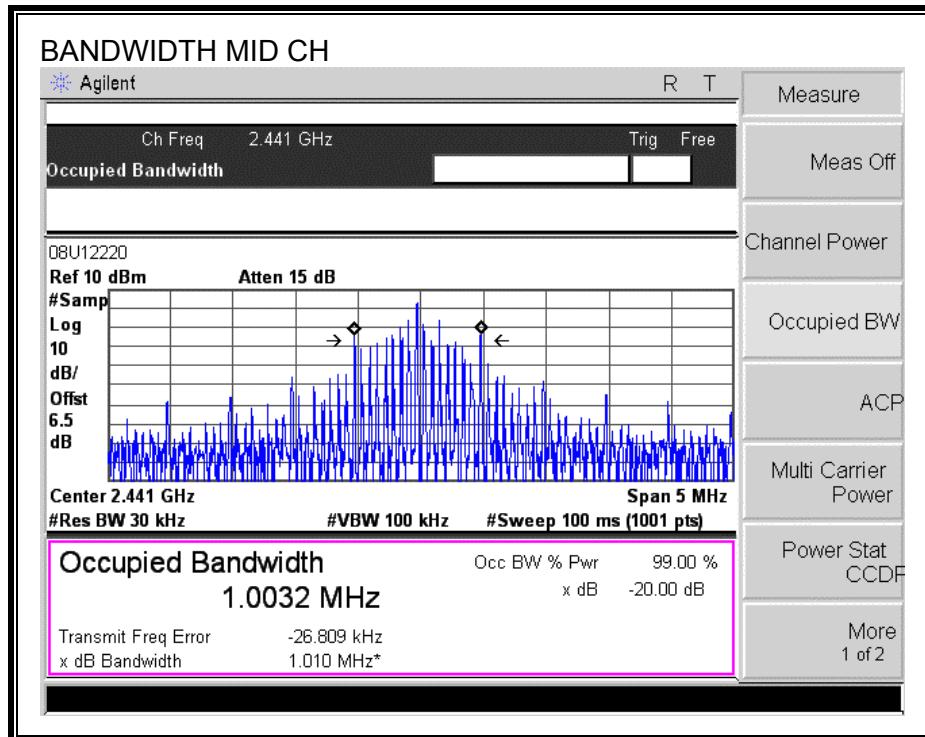

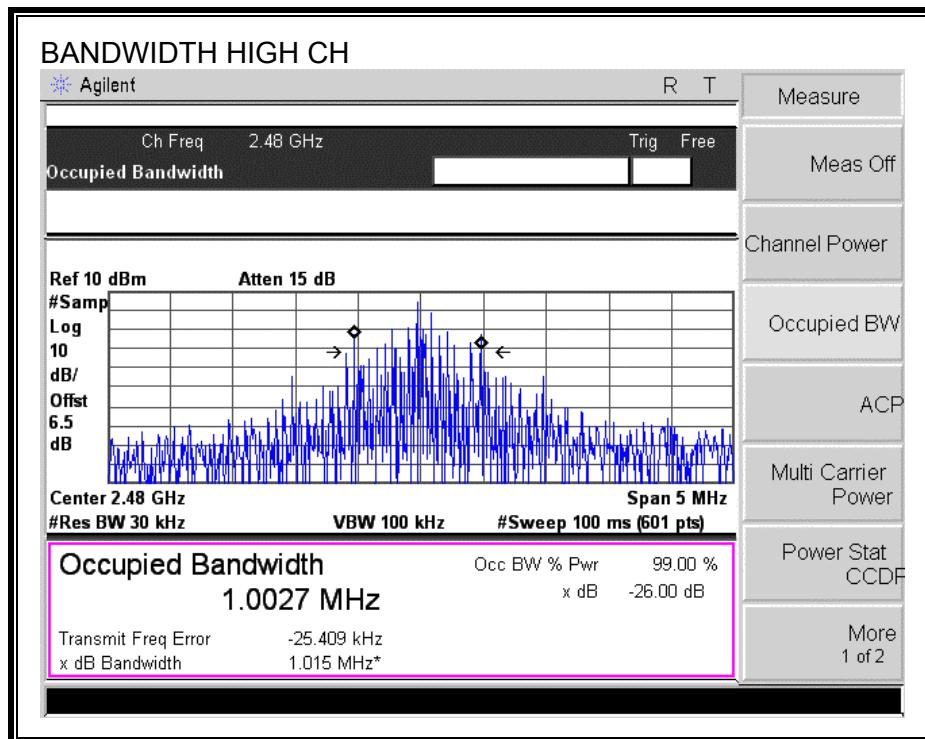

7.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

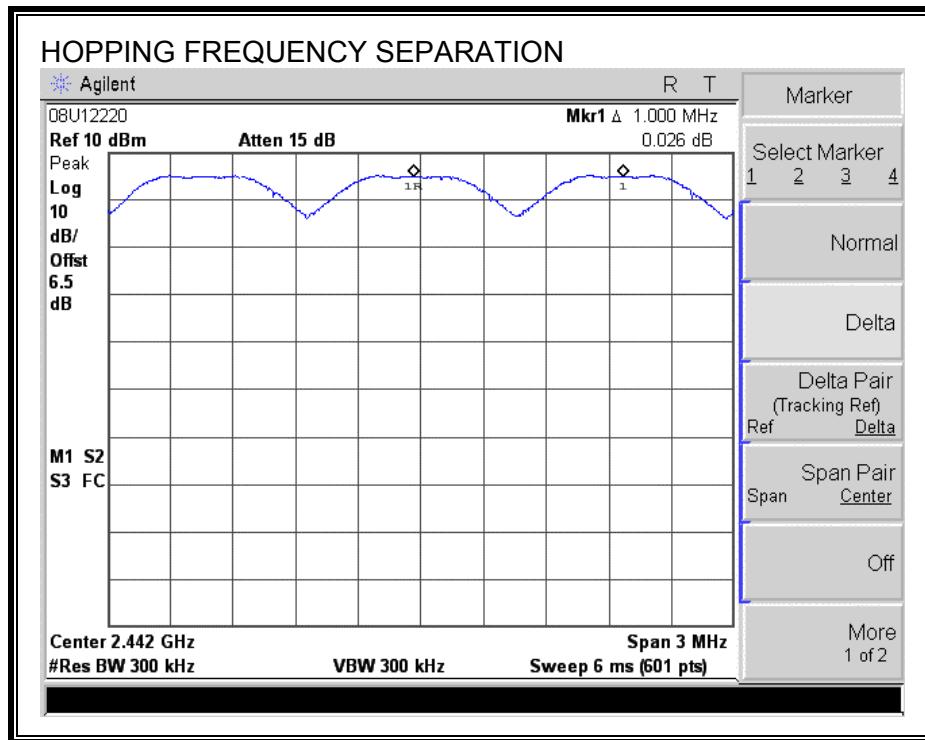

7.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

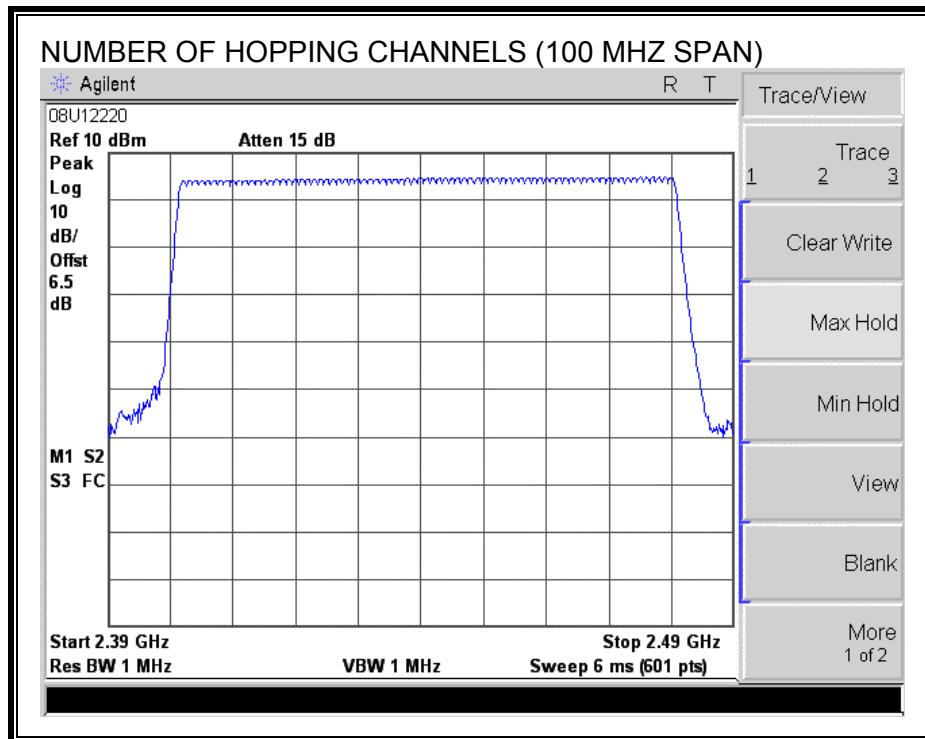

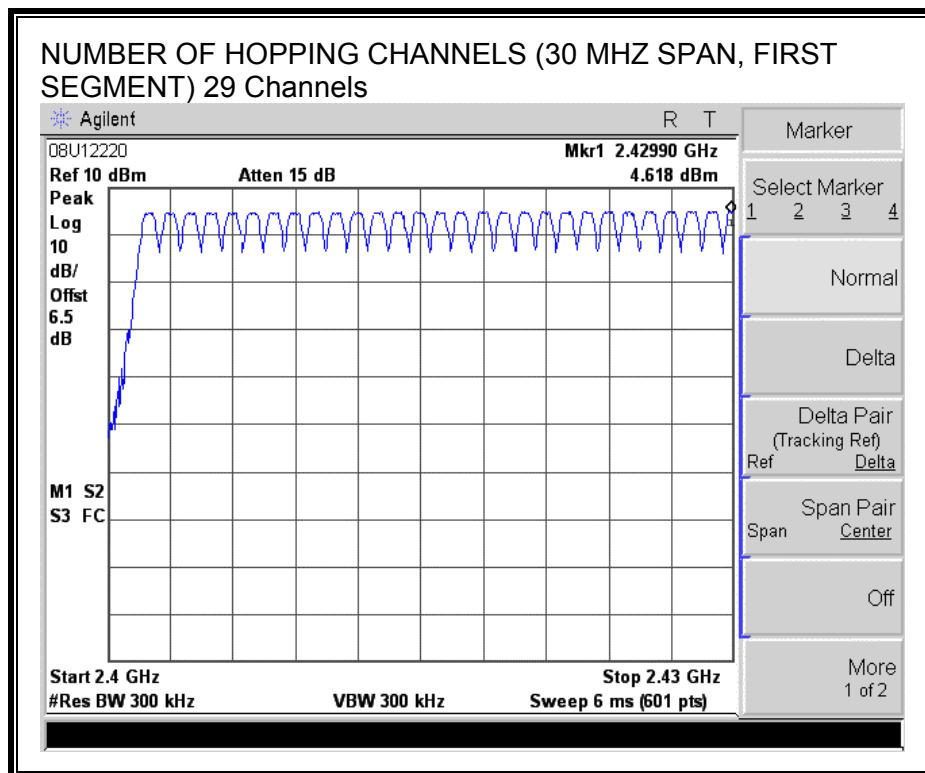

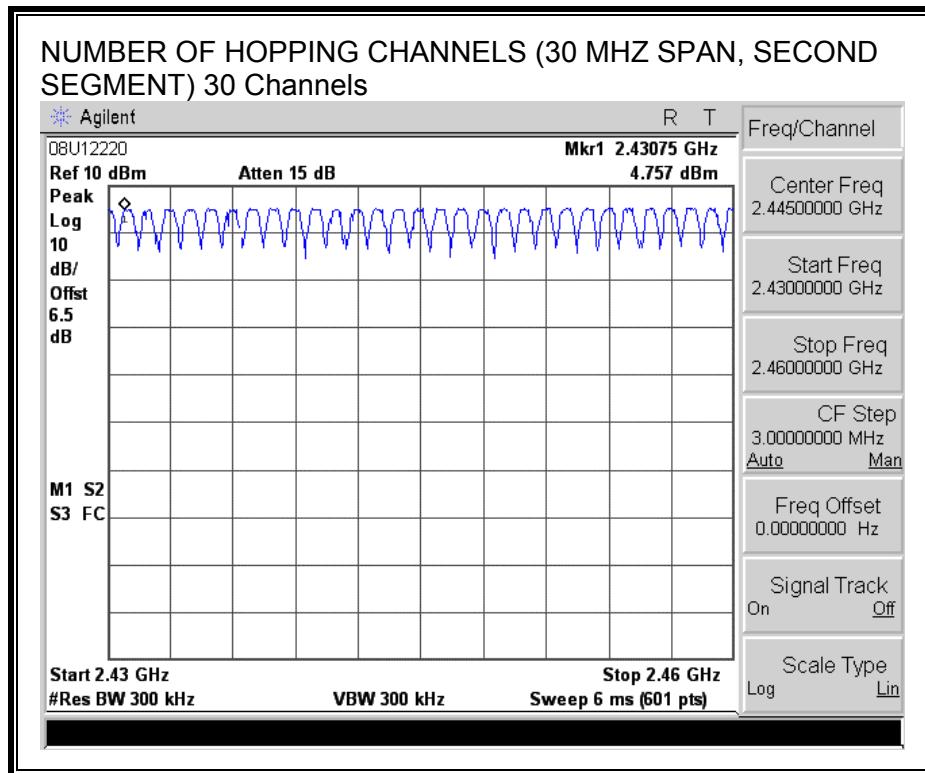

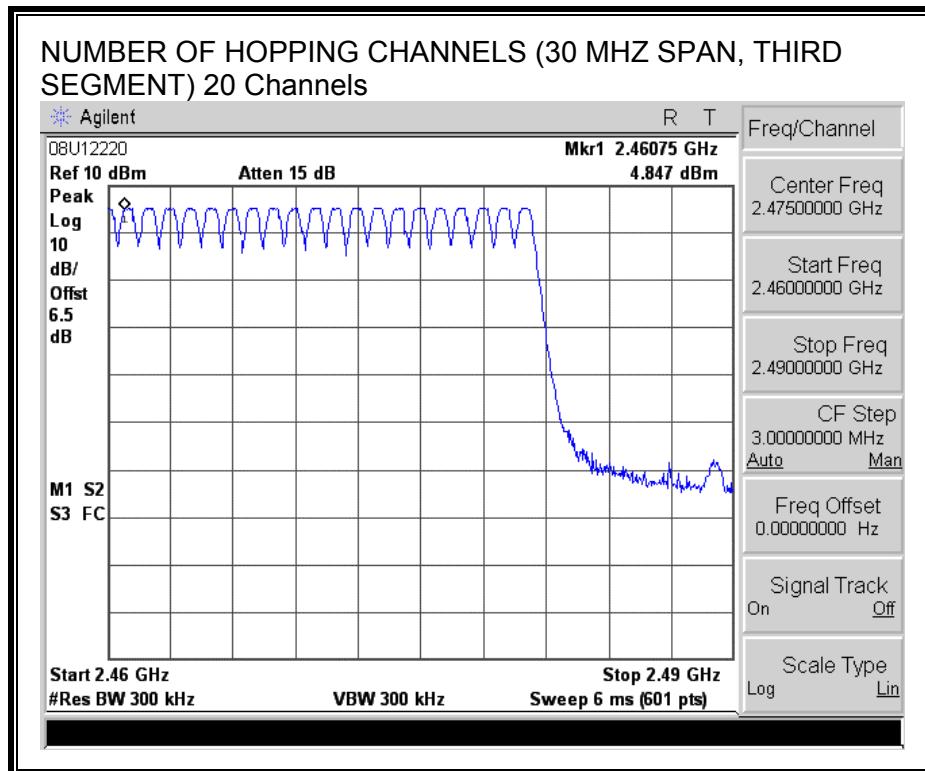

7.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

RESULTS


Time of Occupancy = $10 * \text{number of pulses in } 3.16 \text{ seconds} * \text{Pulse Width}$

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.438	30	0.131	0.4	0.269
DH3	1.689	14	0.236	0.4	0.164

PULSE WIDTH:

DH1:

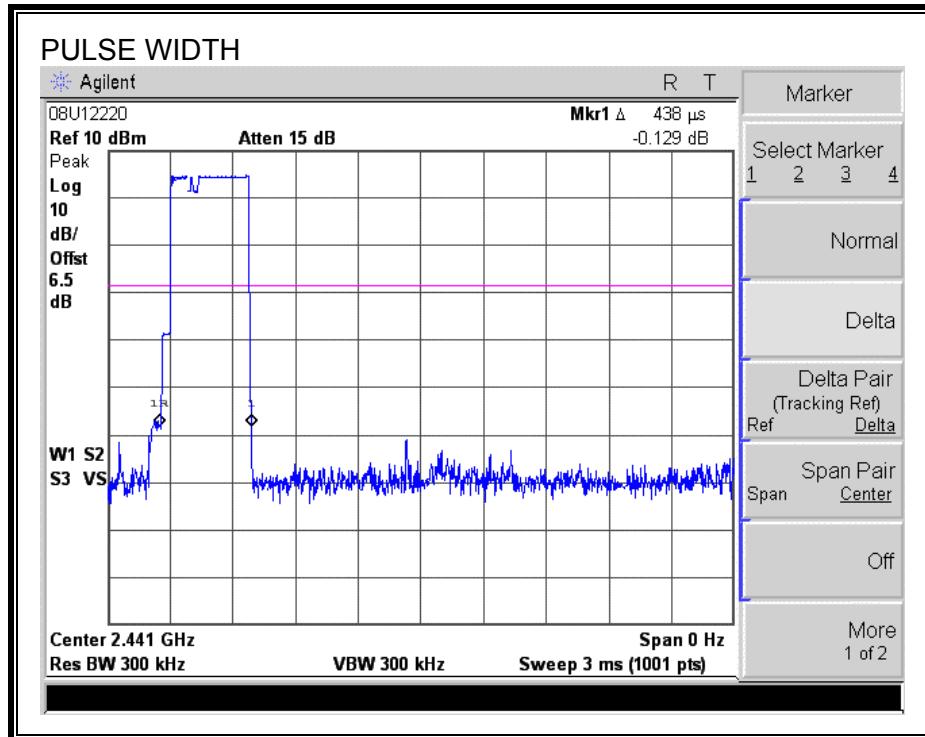


DH3:

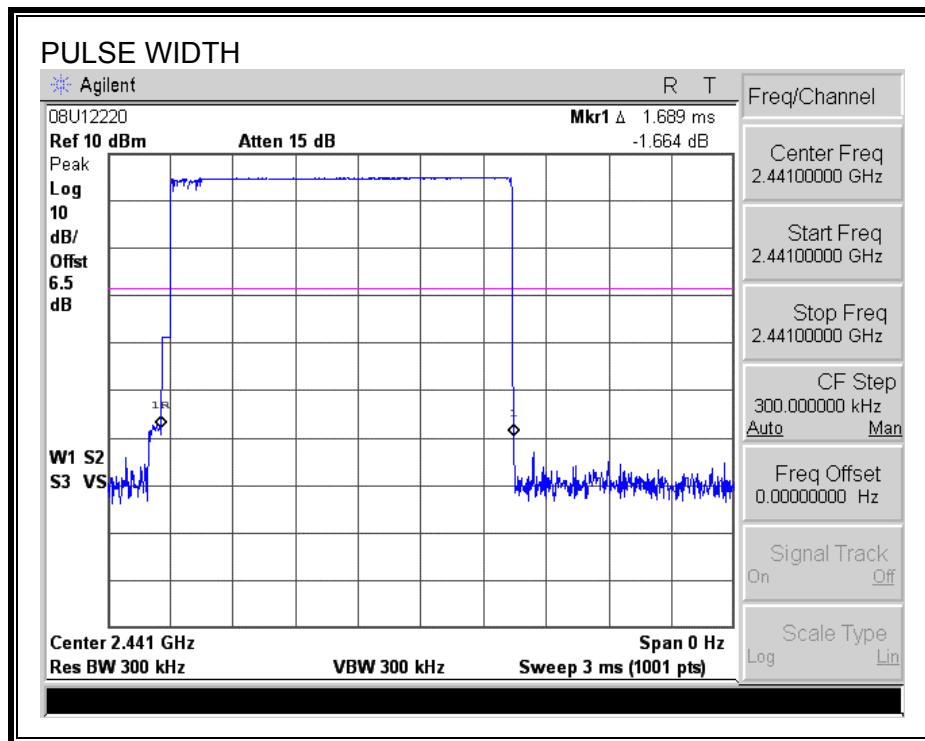


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

DH1:

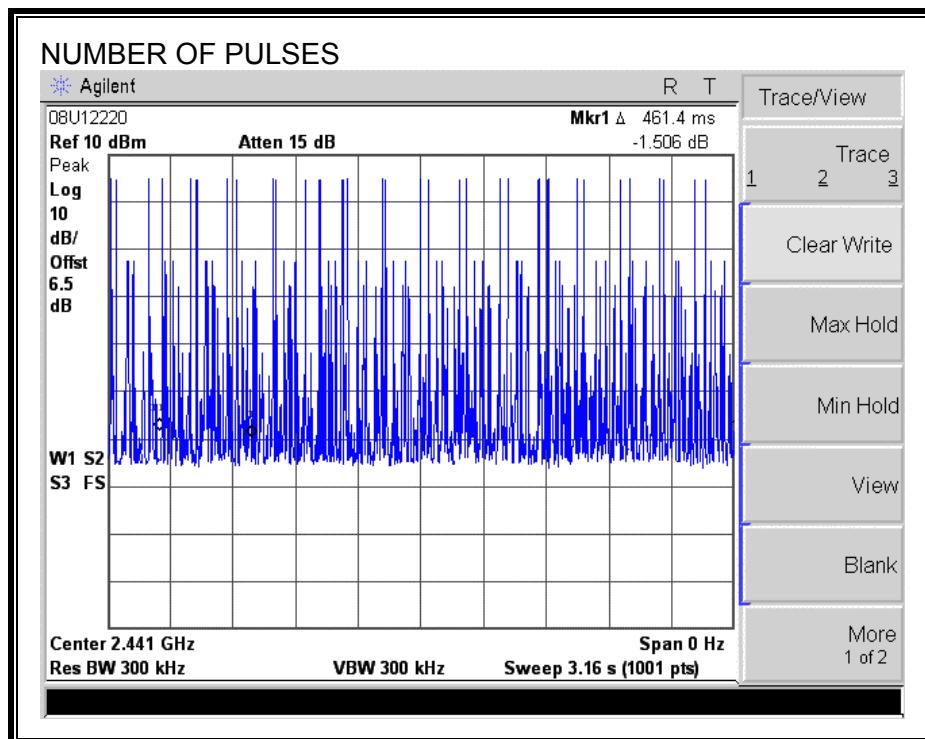

DH3:

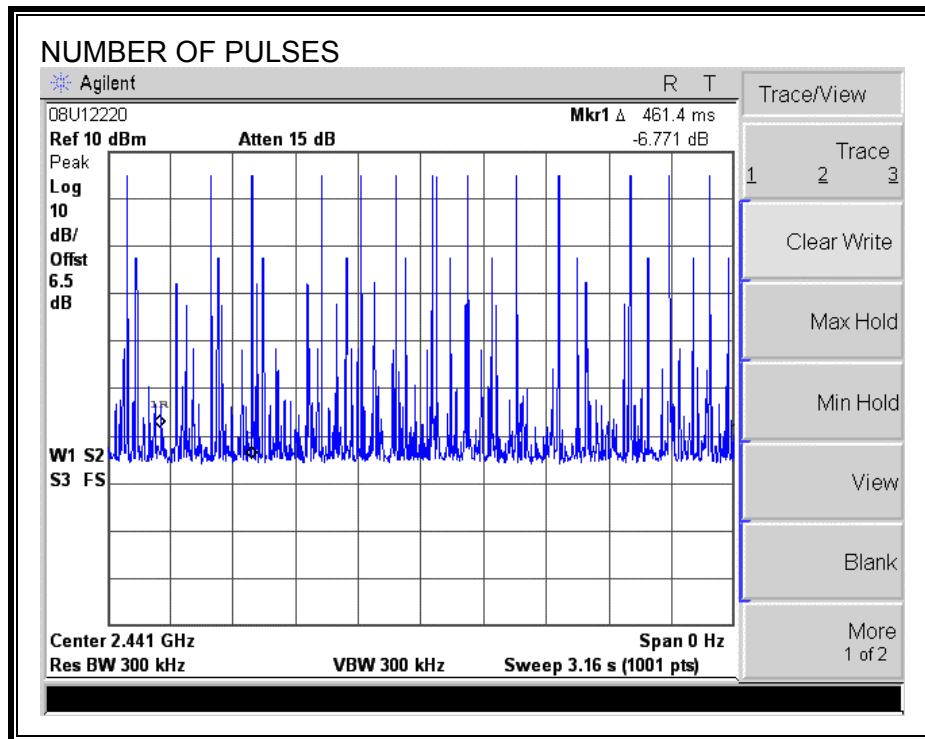

7.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.867	30	-26.13
Middle	2441	4.351	30	-25.65
High	2480	4.532	30	-25.47

OUTPUT POWER

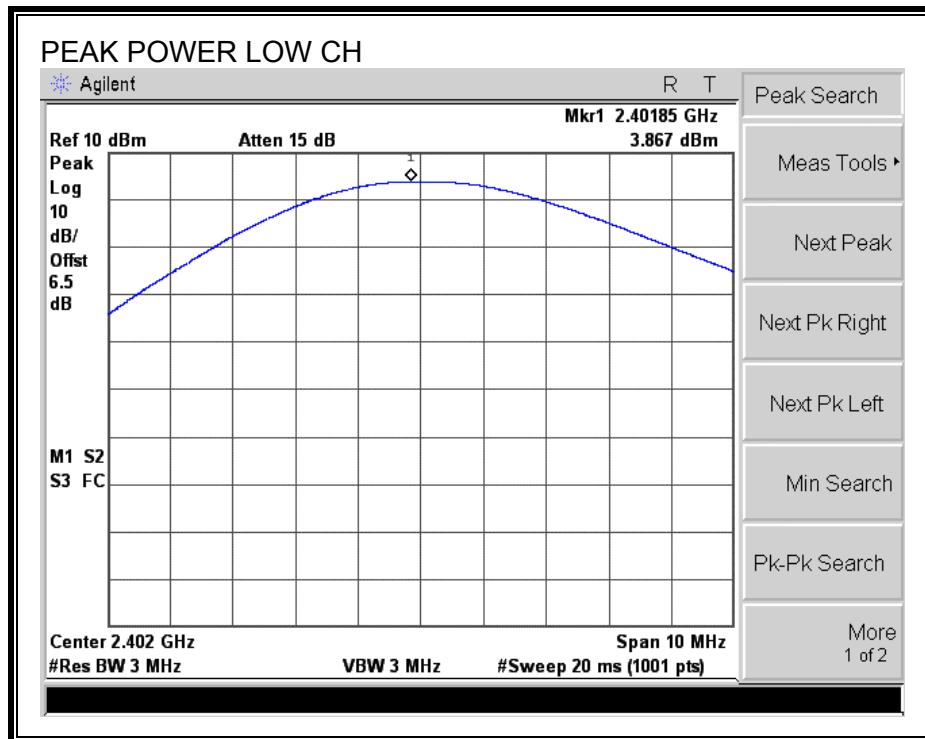

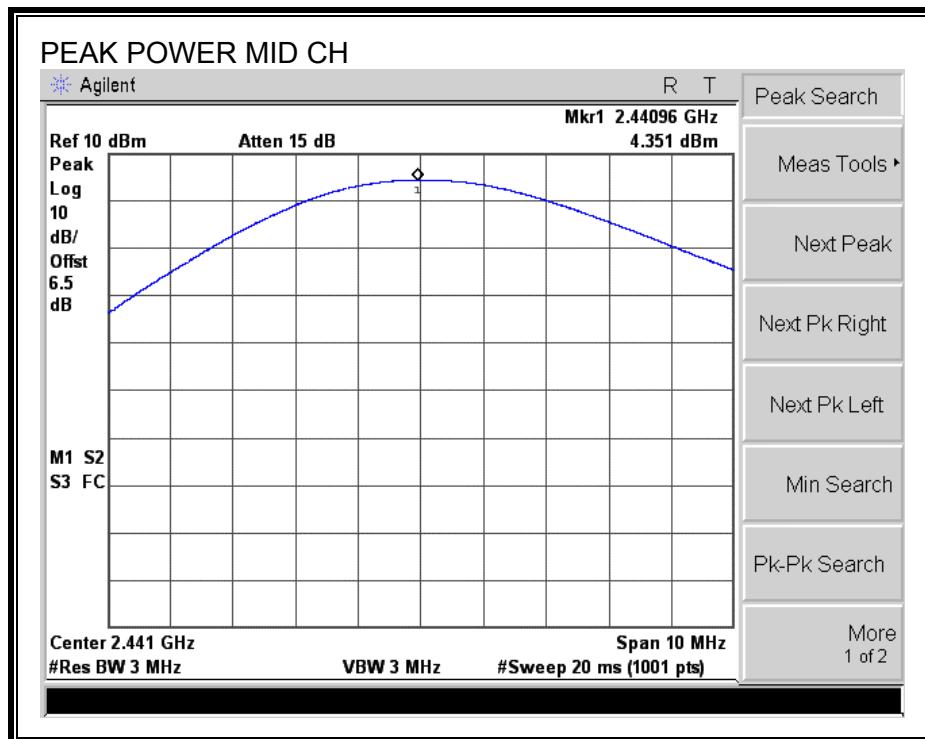

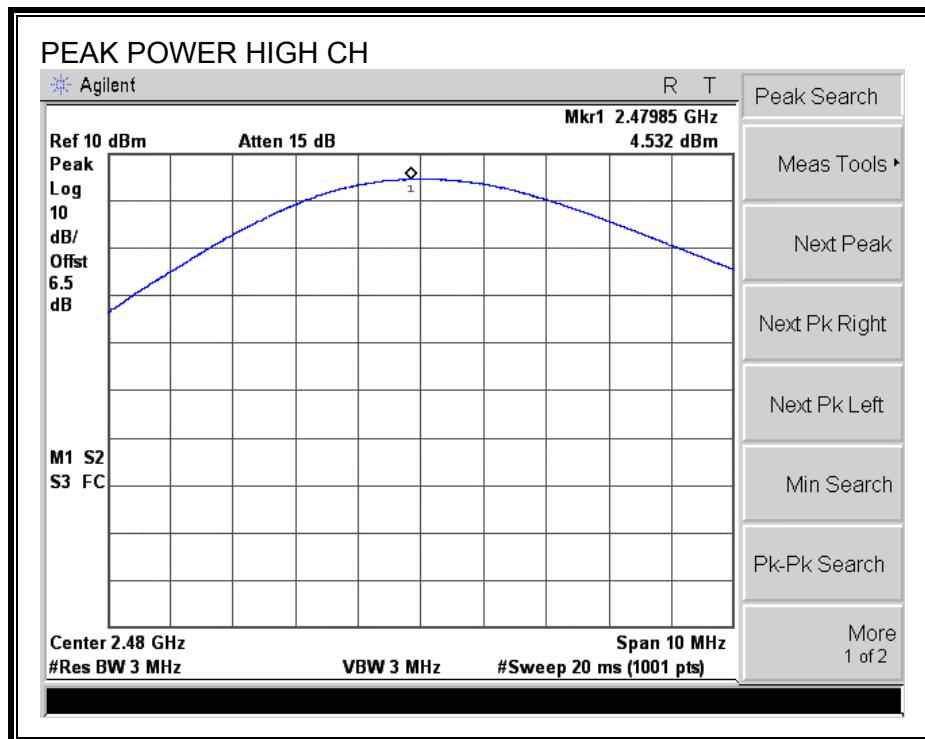

7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

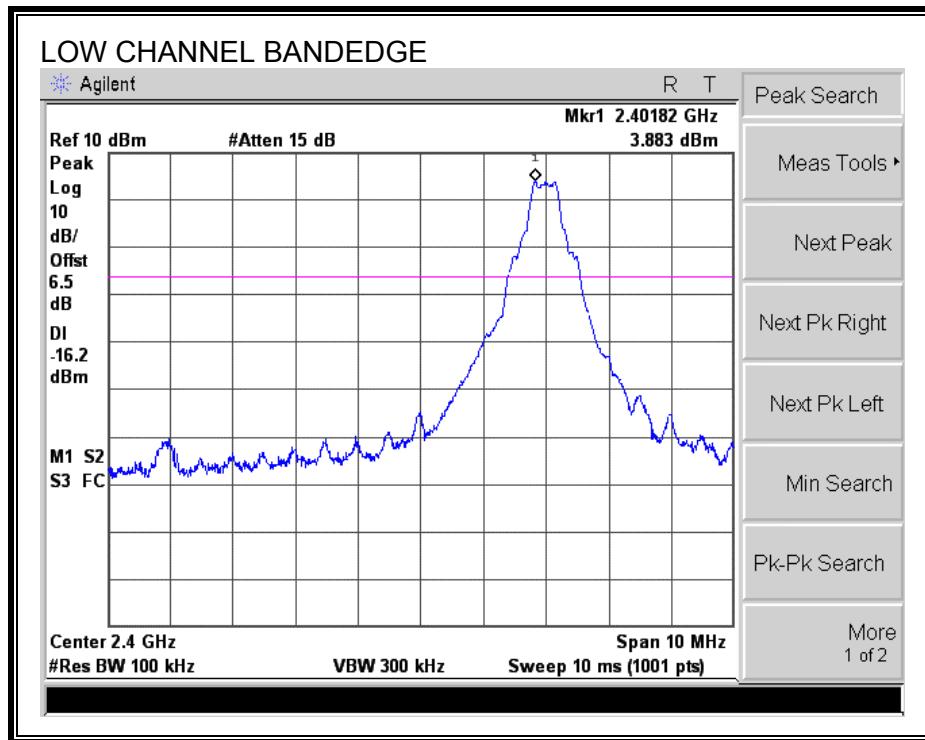

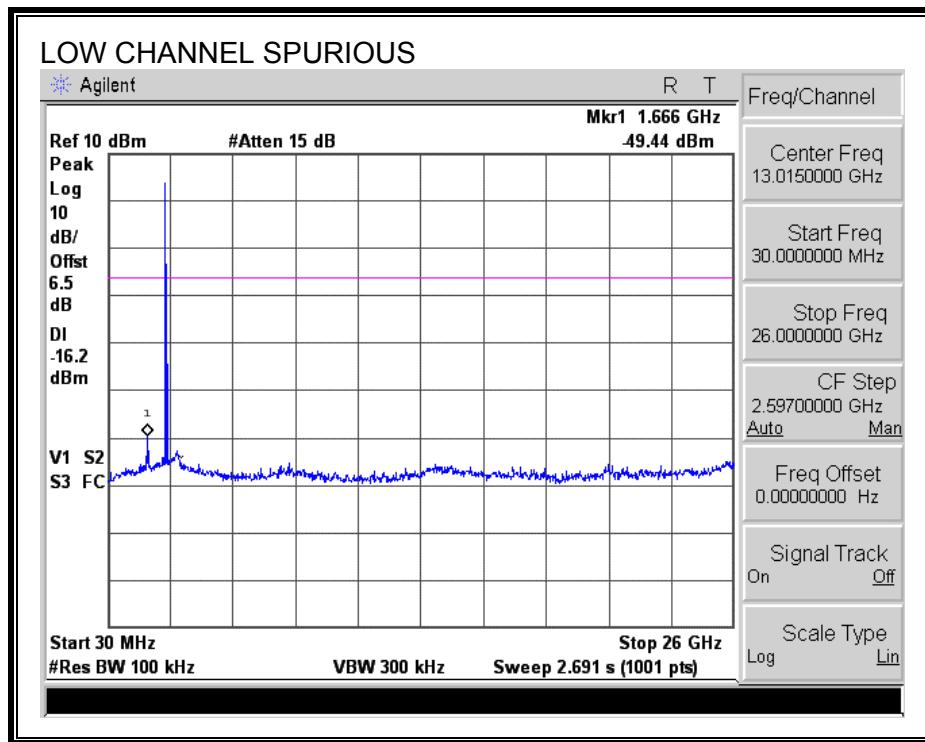



SPURIOUS EMISSIONS, MID CHANNEL

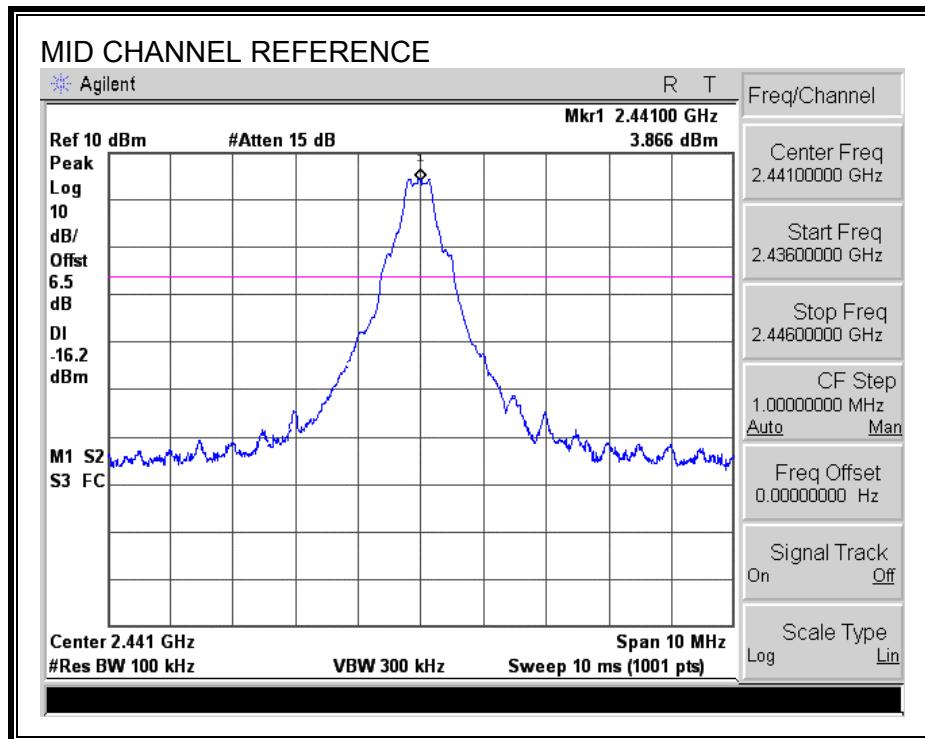

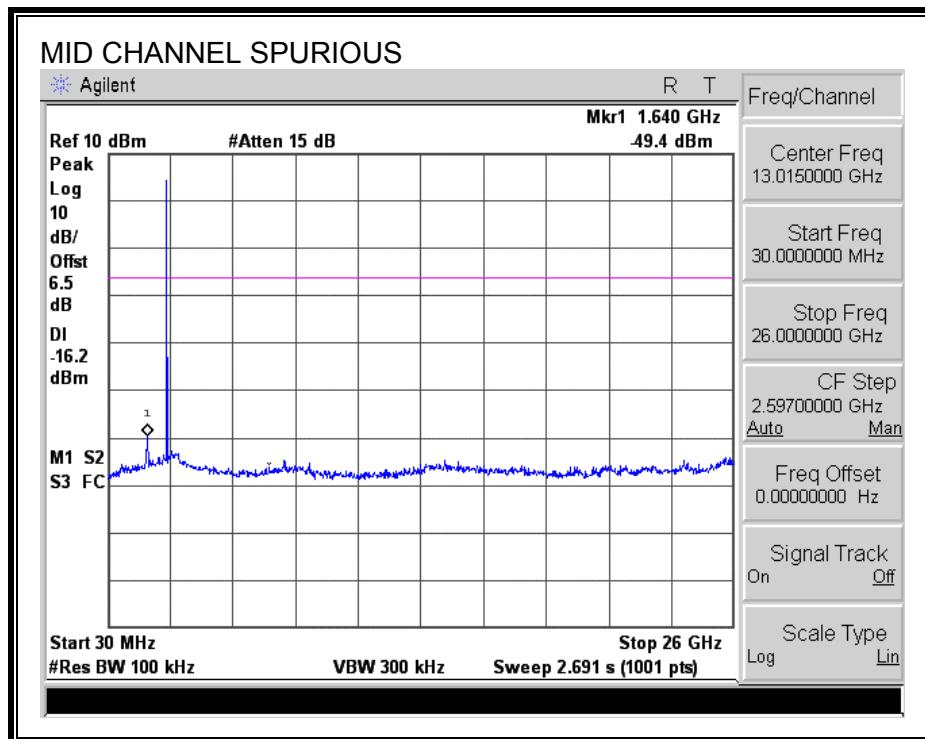



SPURIOUS EMISSIONS, HIGH CHANNEL

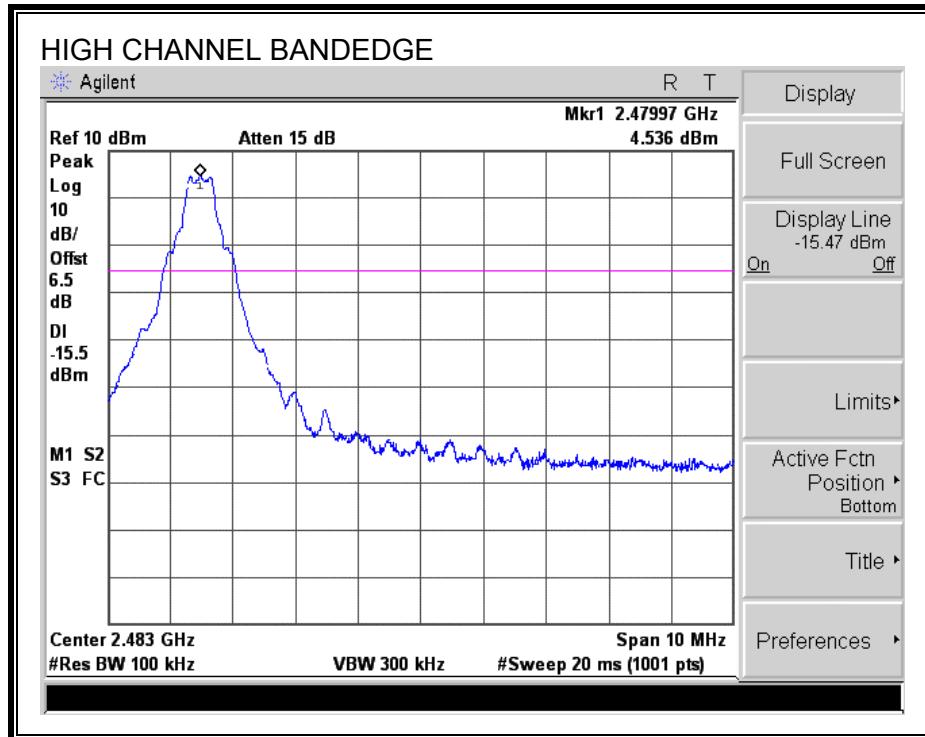

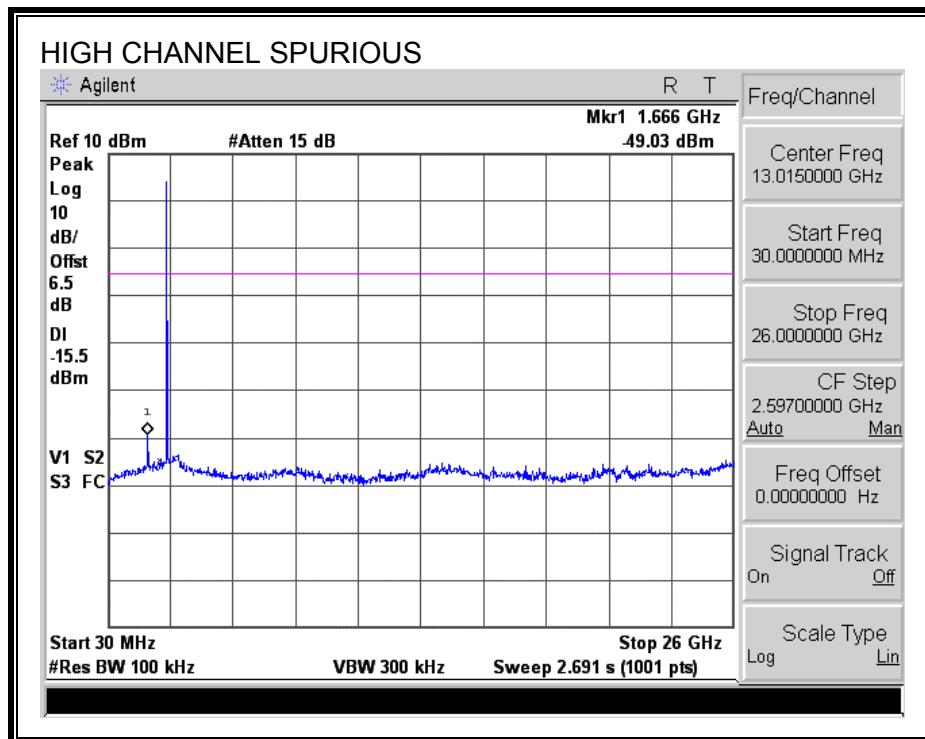

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

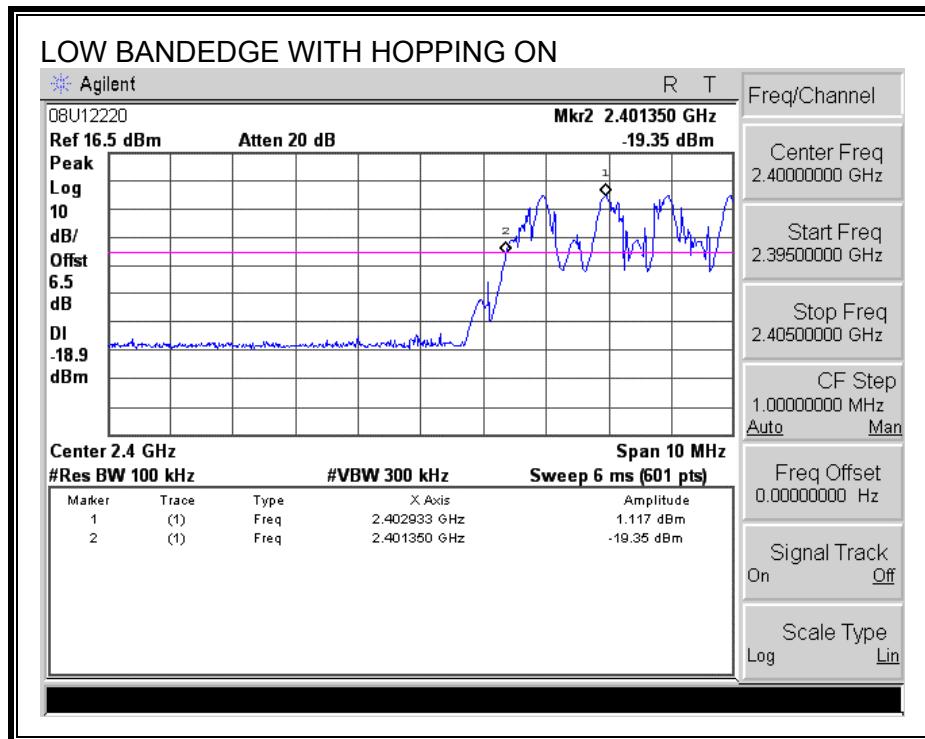

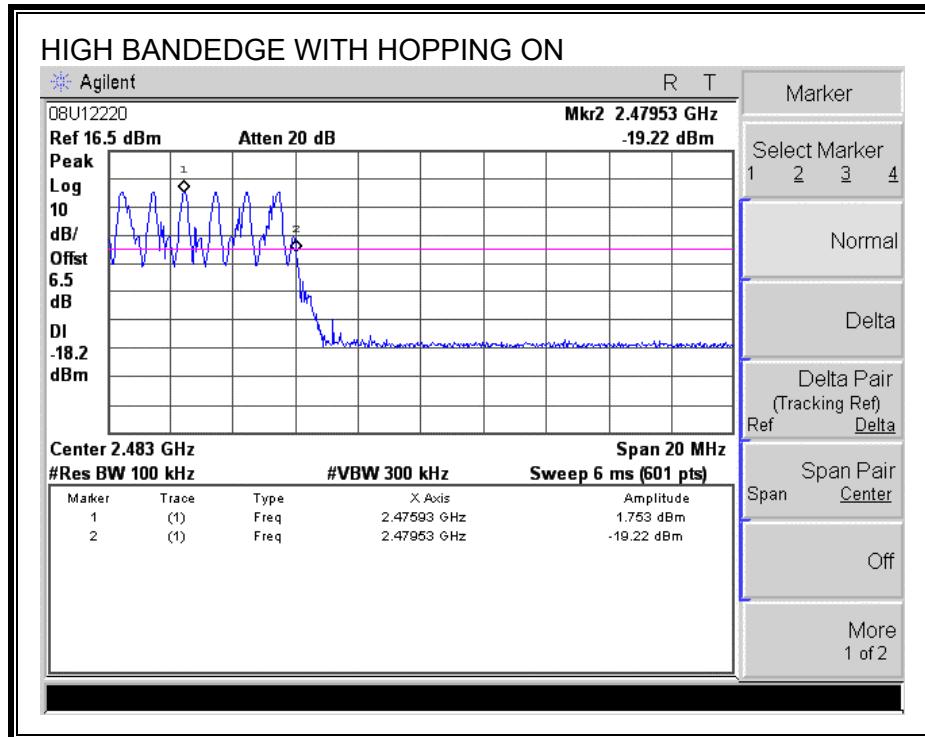

8. RADIATED TEST RESULTS (GFSK MODULATION)

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


8.2. TRANSMITTER ABOVE 1 GHz


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

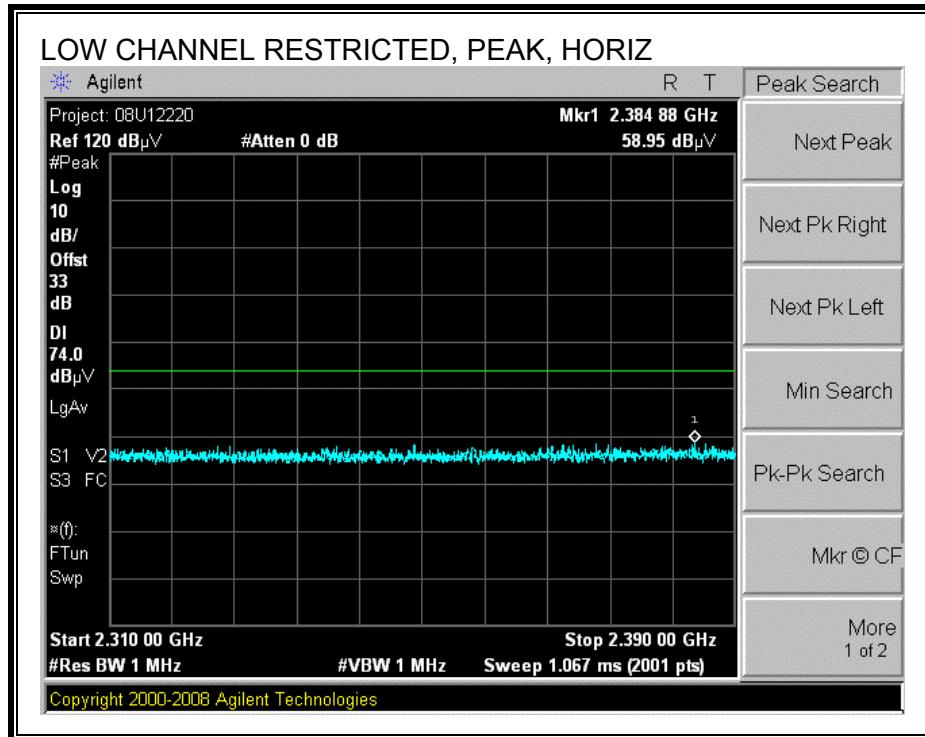

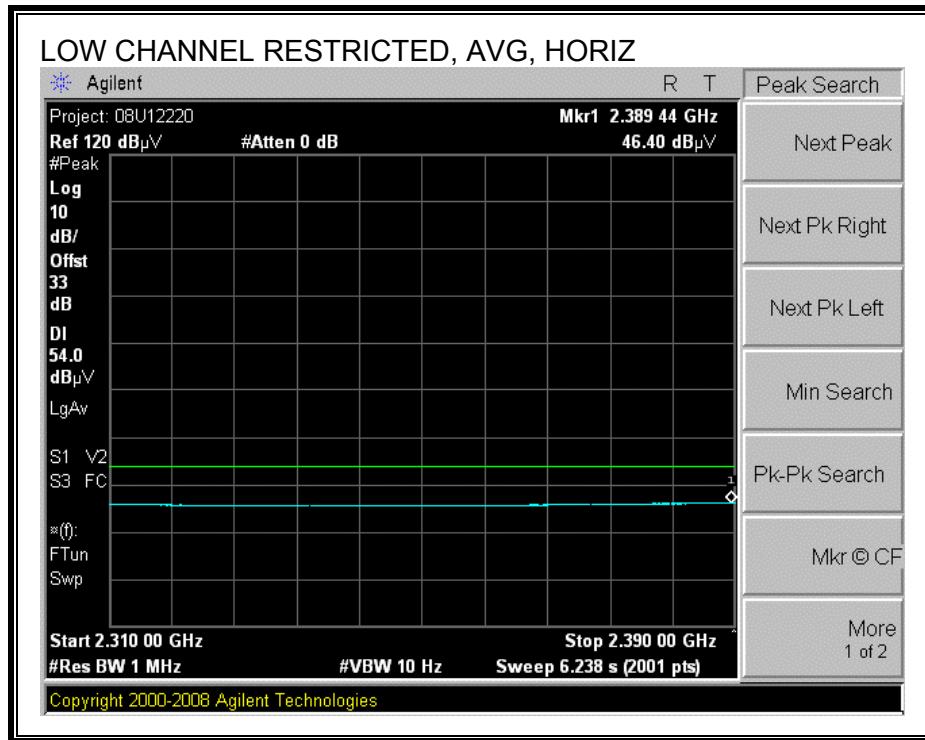



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

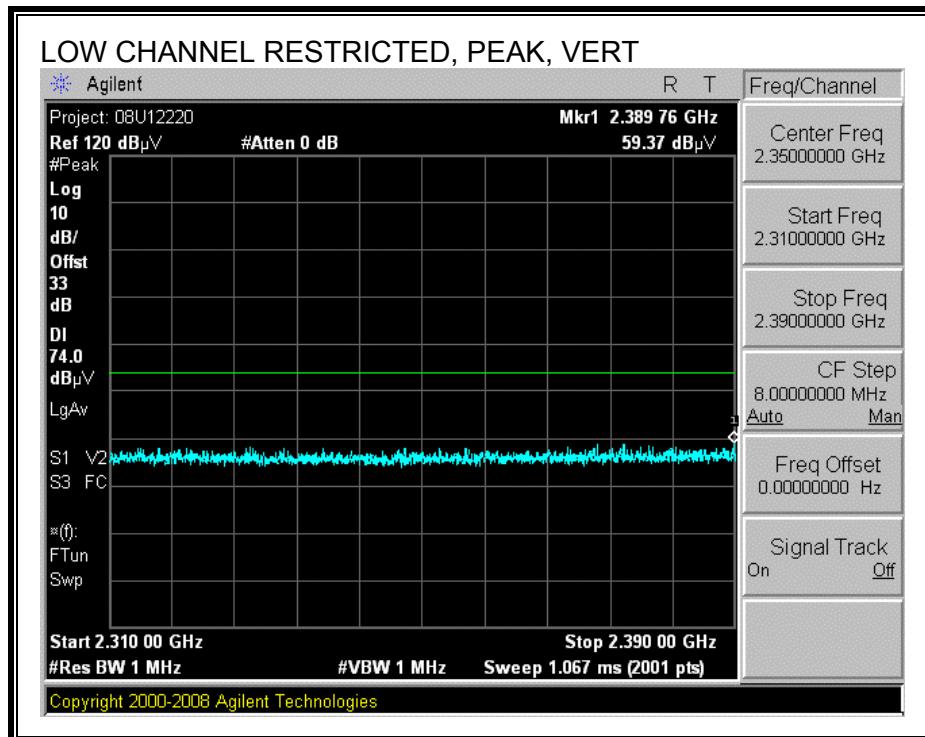

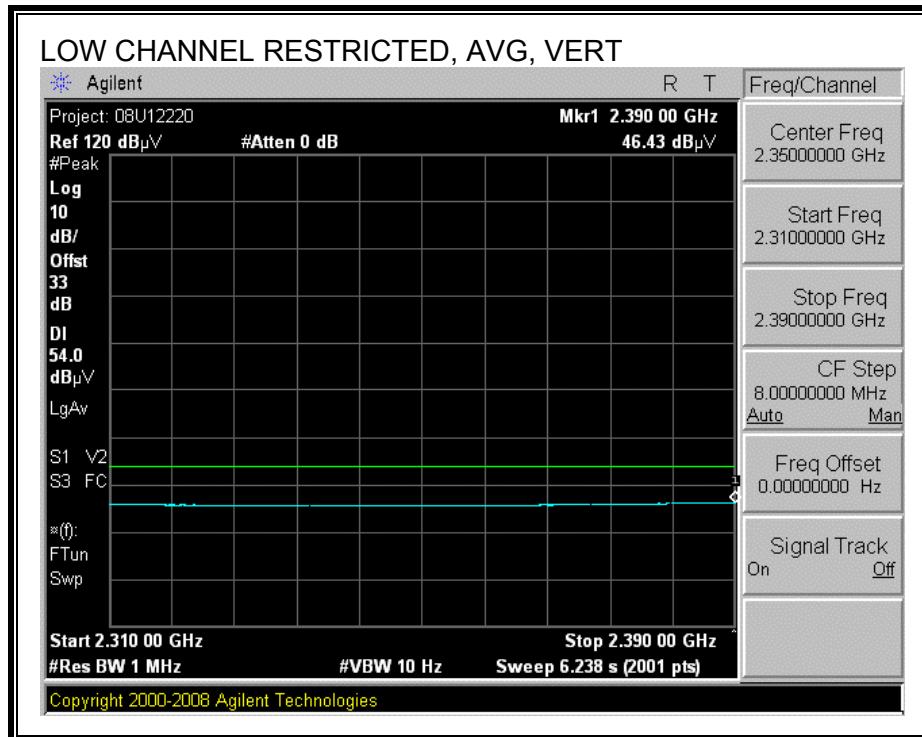



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

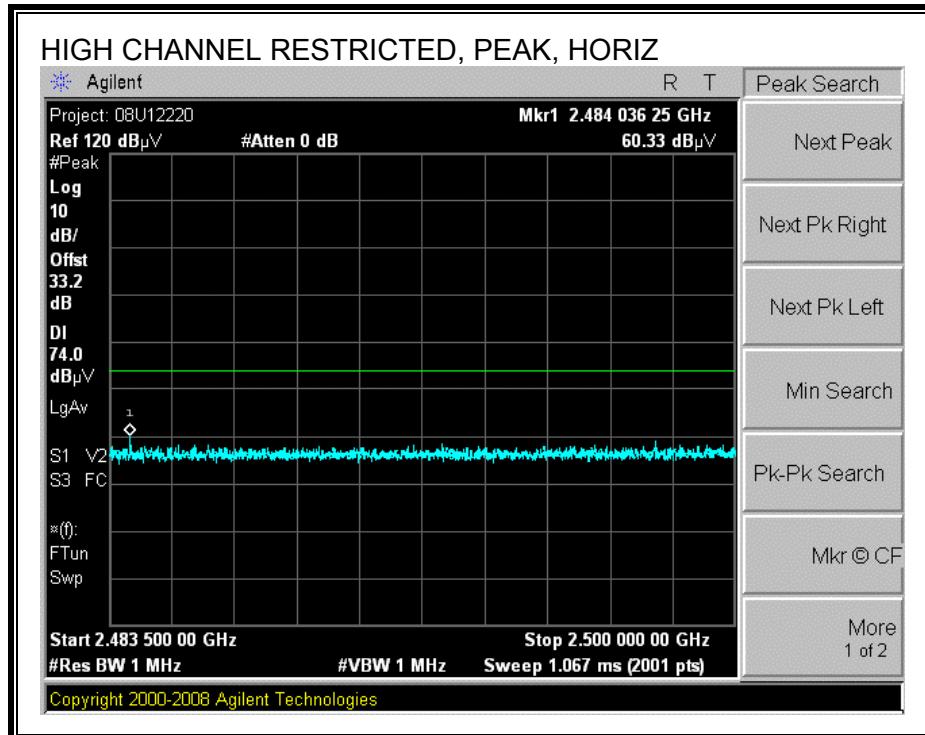

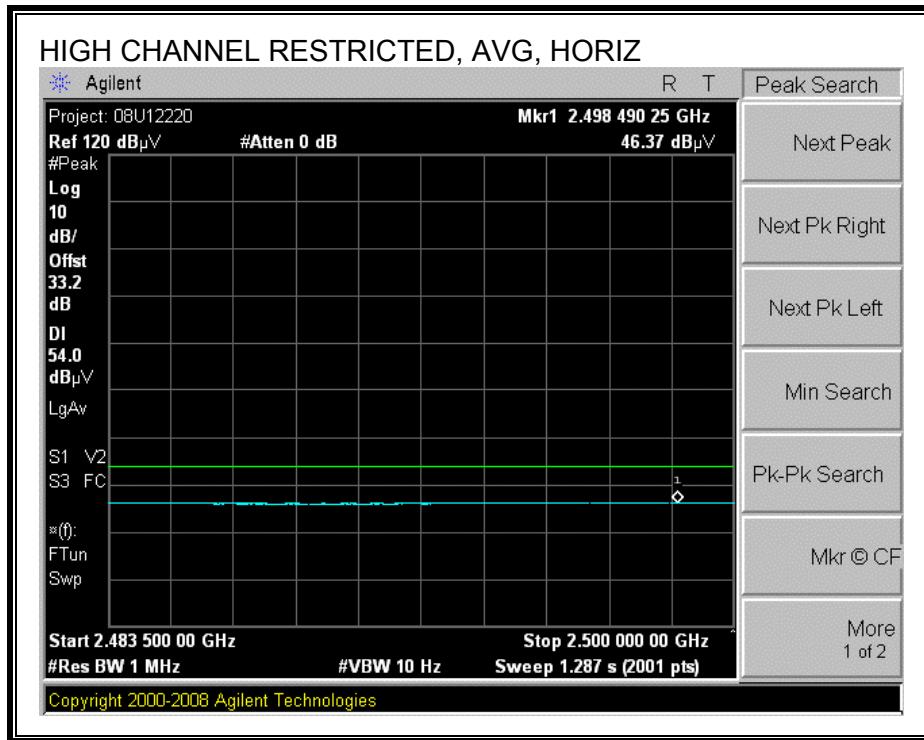

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

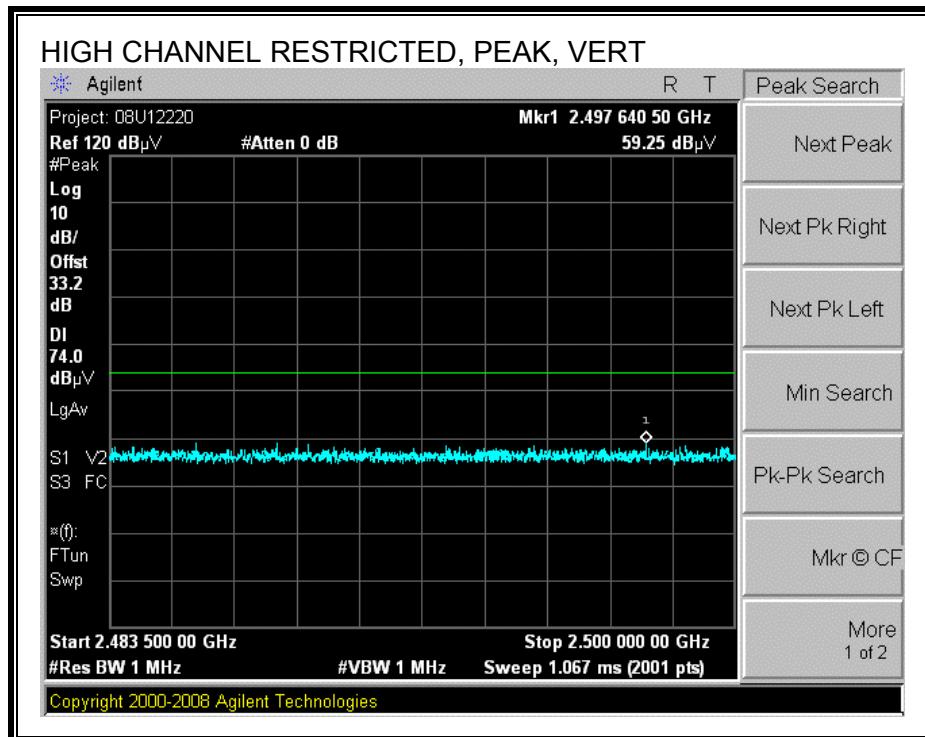

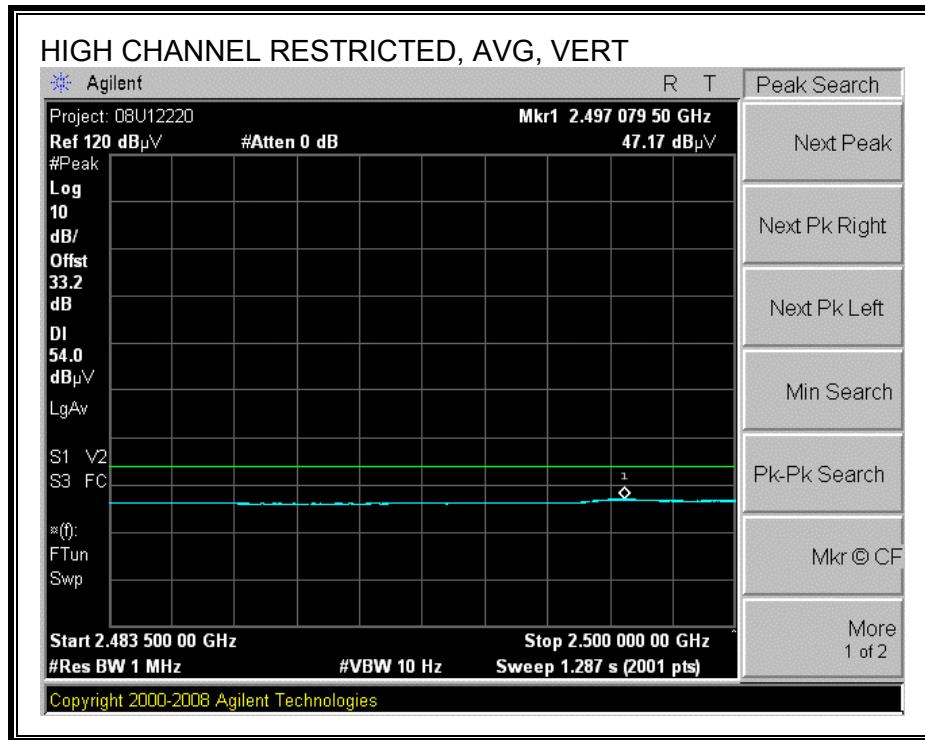

HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																										
Company: Apple Project #: 08U12220 Date: 3/10/09 Test Engineer: Thanh Nguyen Configuration: EUT Stand Alone Mode: Transmit																																										
Test Equipment:																																										
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																														
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.209																														
Hi Frequency Cables <table border="1"> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="9"> Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz </td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td></td> <td colspan="9"></td> </tr> </table>															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz									3' cable 22807700	12' cable 22807600	20' cable 22807500											
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz																																					
3' cable 22807700	12' cable 22807600	20' cable 22807500																																								
f	Dist (m)	Read Ph dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																											
Low Ch, 2402MHz																																										
4.804	3.0	40.1	29.1	33.7	5.8	-34.8	0.0	0.0	44.7	33.7	74	54	-29.3	-20.3	V																											
7.206	3.0	37.1	24.2	36.6	7.2	-34.2	0.0	0.0	46.8	33.9	74	54	-27.2	-20.1	Noise floor																											
4.804	3.0	40.5	28.1	33.7	5.8	-34.8	0.0	0.0	45.1	32.8	74	54	-28.9	-21.2	H																											
7.206	3.0	36.9	24.2	36.6	7.2	-34.2	0.0	0.0	46.6	33.9	74	54	-27.4	-20.1	Noise floor																											
Mid Ch, 2441 MHz																																										
4.882	3.0	40.7	28.1	33.7	5.8	-34.8	0.0	0.0	45.4	32.9	74	54	-28.6	-21.1	V																											
7.323	3.0	36.8	24.1	36.7	7.3	-34.1	0.0	0.0	46.7	34.0	74	54	-27.3	-20.0	Noise floor																											
4.882	3.0	40.3	27.4	33.7	5.8	-34.8	0.0	0.0	45.1	32.1	74	54	-28.9	-21.9	H																											
7.323	3.0	36.8	24.2	36.7	7.3	-34.1	0.0	0.0	46.7	34.1	74	54	-27.3	-19.9	Noise floor																											
High Ch, 2480 MHz																																										
4.960	3.0	39.7	27.6	33.8	5.9	-34.8	0.0	0.0	44.6	32.5	74	54	-29.4	-21.5	V																											
7.440	3.0	36.5	24.1	36.8	7.3	-34.1	0.0	0.0	46.6	34.2	74	54	-27.4	-19.8	Noise floor																											
4.960	3.0	39.2	26.7	33.8	5.9	-34.8	0.0	0.0	44.1	31.6	74	54	-29.9	-22.4	H																											
7.440	3.0	36.6	24.0	36.8	7.3	-34.1	0.0	0.0	46.7	34.1	74	54	-27.3	-19.9	Noise floor																											
No other emissions were detected above noise floor.																																										
Rev. 10.15.08																																										
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss					Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter					Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																

8.3. RECEIVER ABOVE 1 GHZ

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
<p>Company: Apple Project #: 08U12220 Date: 3/11/2009 Test Engineer: Thanh Nguyen Configuration: FUT StandAlone Mode: Rx Mode</p>															
<p><u>Test Equipment:</u></p>															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T60; S/N: 2238 @3m			T34 HP 8449B						T125; ARA 18-26GHz; S/N:1007			RX RSS 210			
<p>Hi Frequency Cables</p>															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500									Average Measurements RBW=1MHz, VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dBuV/m	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.048	3.0	48.3	37.2	26.5	2.4	-38.2	0.0	0.0	39.1	28.0	74	54	-34.9	-26.0	V
1.234	3.0	56.9	37.6	27.0	2.6	-37.9	0.0	0.0	48.6	29.3	74	54	-25.4	-24.7	V
1.098	3.0	62.9	38.5	26.7	2.5	-38.1	0.0	0.0	53.9	29.5	74	54	-20.1	-24.5	H
1.332	3.0	55.4	36.1	27.3	2.8	-37.8	0.0	0.0	47.6	28.3	74	54	-26.4	-25.7	H
<p>No other Emissions were detected above system noise floor.</p>															
<p>Rev. 10.15.08</p>															
<p>f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss</p>					<p>Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter</p>					<p>Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit</p>					

8.4. WORST-CASE BELOW 1 GHz (RADIO AND DIGITAL)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

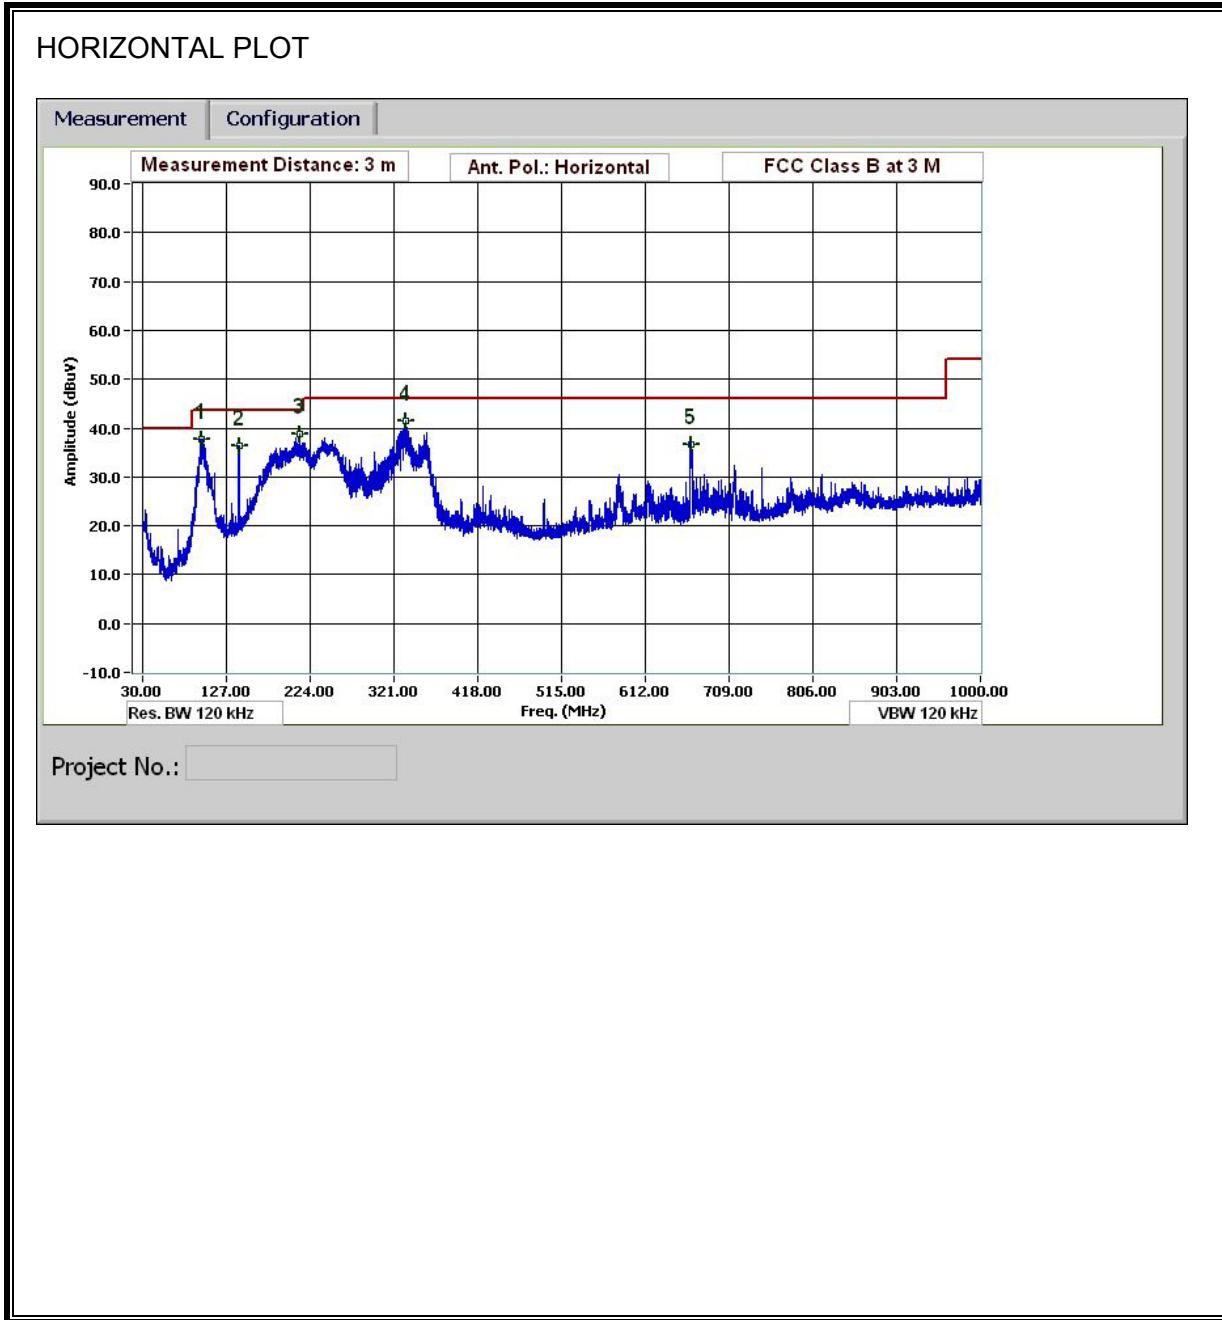

HORIZONTAL DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen
Date: 03/10/09
Project #: 08U12220
Company: Apple Computer Inc.
EUT Description: Bluetooth Device
Test Target: FCC 15.247 BT Devices.
Mode Oper:


f	Measurement Frequency	Amp	Preamp Gain		Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters			
Read	Analyzer Reading	Filter	Filter Insert Loss			
AF	Antenna Factor	Corr.	Calculated Field Strength			
CL	Cable Loss	Limit	Field Strength Limit			

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
Digital Emissions															
97.923	3.0	56.2	8.9	0.8	28.2	0.0	0.0	37.7	43.5	-5.8	H	P	130.0	180.0	N/A
141.485	3.0	50.4	13.0	1.0	27.9	0.0	0.0	36.5	43.5	-7.0	H	P	145.0	160.0	N/A
211.807	3.0	53.0	11.9	1.2	27.4	0.0	0.0	38.7	43.5	-4.8	H	P	120.0	200.0	N/A
334.093	3.0	53.5	14.0	1.6	27.6	0.0	0.0	41.5	46.0	-4.5	H	P	140.0	220.0	N/A
663.986	3.0	44.6	18.8	2.3	28.5	0.0	0.0	37.1	46.0	-8.9	H	P	150.0	200.0	N/A

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

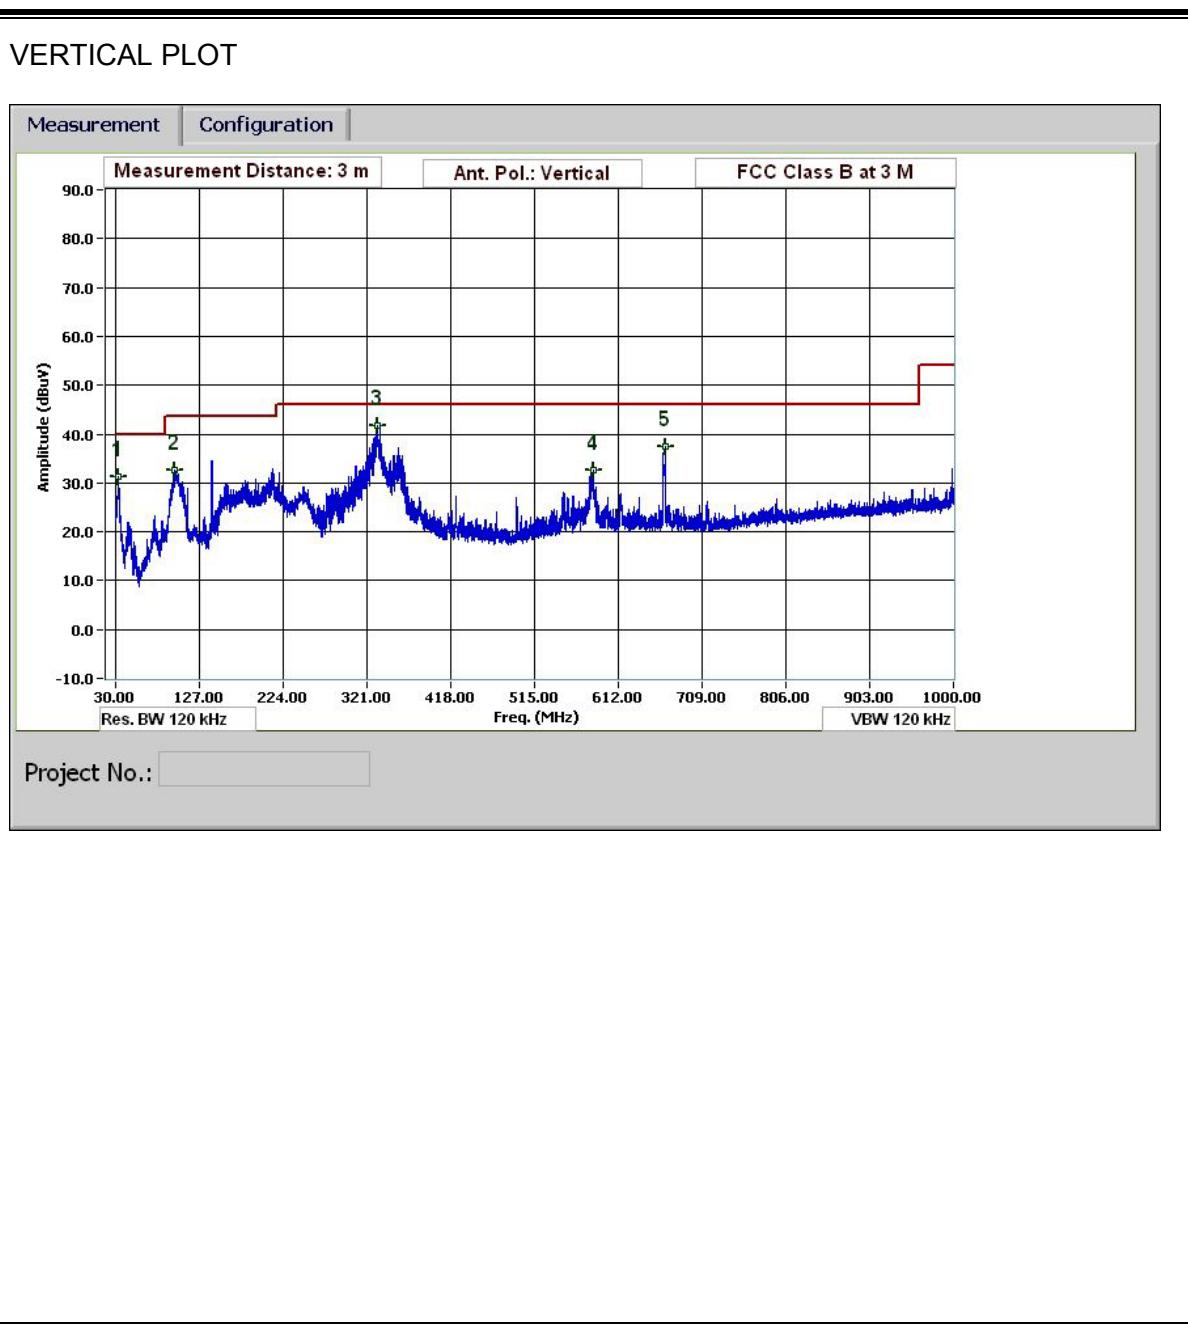

VERTICAL DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen
Date: 3/10/09
Project #: 08U12220
Company: Apple Computer Inc.
EUT Description: Bluetooth Device
Test Target: FCC 15.247 BT Devices.

Mode Oper:

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters	
Read	Analyzer Reading	Filter		Filter Insert Loss	
AF	Antenna Factor	Cor.		Calculated Field Strength	
CL	Cable Loss	Limit		Field Strength Limit	

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
33.600	3.0	40.9	18.2	0.5	28.4	0.0	0.0	31.2	40.0	-8.8	V	P	125.0	180.0	N/A
98.763	3.0	51.0	9.1	0.8	28.2	0.0	0.0	32.6	43.5	-10.9	V	P	135.0	220.0	N/A
141.485	3.0	48.4	13.0	1.0	27.9	0.0	0.0	34.5	43.5	-9.0	V	P	120.0	200.0	N/A
333.133	3.0	53.7	14.0	1.6	27.6	0.0	0.0	41.7	46.0	-4.3	V	P	135.0	280.0	N/A
666.026	3.0	45.0	18.8	2.3	28.5	0.0	0.0	37.5	46.0	-8.5	V	P	150.0	180.0	N/A

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842f	4.89f	*(900f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824f	2.19f	*(180f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/f	2.19/f		6
10–30	28	2.19/f		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes:

1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μ T) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10) / (d^2)}$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
Bluetooth	2.4 GHz	20.0	4.532	-2.00	0.0004	0.0036