



**FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 7
CERTIFICATION TEST REPORT**

FOR

ACCESS POINT

MODEL NUMBER: A1302

**FCC ID: BCGA1302
IC: 579C-A1302**

REPORT NUMBER: 08U12087-2, Revision A

ISSUE DATE: FEBRUARY 09, 2009

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	01/23/09	Initial Issue	F. Ibrahim
A	02/09/09	Corrected antenna gain, Output Power section, Test and Measurement Equipment List and MPE section.	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>802.11a MODE IN THE 5.2 GHz BAND</i>	11
7.1.1. 26 dB and 99% BANDWIDTH	11
7.1.2. OUTPUT POWER	22
7.1.3. PEAK POWER SPECTRAL DENSITY	34
7.1.4. PEAK EXCURSION	41
7.1.5. CONDUCTED SPURIOUS EMISSIONS	50
8. RADIATED TEST RESULTS	59
8.1. <i>TRANSMITTER ABOVE 1 GHz IN THE 5.2 GHz BAND</i>	60
8.1.1. 802.11a MODE IN THE 5.2 GHz BAND	60
8.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	65
8.1.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	70
8.2. <i>RECEIVER ABOVE 1 GHz IN THE WORST CASE MODE</i>	75
8.2.1. RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 5.2 GHz BAND	75
8.2.2. RX ABOVE 1 GHz FOR 40 MHz BANDWIDTH IN THE 5.2 GHz BAND	76
8.3. <i>WORST-CASE BELOW 1 GHz</i>	77
8.4. <i>POWERLINE CONDUCTED EMISSIONS</i>	79
9. MAXIMUM PERMISSIBLE EXPOSURE	82
10. SETUP PHOTOS	87

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: ACCESS POINT

MODEL: A1302

SERIAL NUMBER: 6F83504X2UJ

DATE TESTED: September 11, 2008 – January 23, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C and Subpart E	PASS
RSS-210 Issue 7 Annex 8 and RSS-GEN Issue 2	PASS

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



THANH NGUYEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n transceiver Access Point.

The radio module is manufactured by Ambit subsidiary of Foxconn, which is located in Hon Hai.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 to 5240	802.11a	14.12	25.82
5180 to 5240	802.11n HT20	12.96	19.77
5190 to 5230	802.11n HT40	16.10	40.74

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes the following PIFA antennas:

Model 631-0878 used for AP1, with a maximum gain of 3.49 dBi in the 2.4 GHz band.

Model 631-0860 used for AP3, with a maximum gain of -0.04 dBi in the 2.4 GHz band.

Model 631-0861 used for AP2, with a maximum gain of 3.62 dBi in the 5.2 GHz band, 3.18 dBi in the 5.3 GHz band, 3.66 dBi in the 5.6 GHz band and 3.4 dBi in the 5.8 GHz band.

Model 631-0859 used for AP4, with a maximum gain of 4.21 dBi in the 5.2 GHz band, 3.78 dBi in the 5.3 GHz band, 3.67 dBi in the 5.6 GHz band, and 2.61 dBi in the 5.8 GHz band.

5.4. SOFTWARE AND FIRMWARE

Firmware: k10_7.4d4auto20080826T0200

EUT Driver Software: ARTR07B13

The test utility software used during testing was ART Build #13, rev. 0.79

5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated Emissions and Power line Conducted Emissions, the channel with the highest conducted output power was selected.

Worst-case data rates as provided by the manufacturer are:

For 11a mode: 6Mbps

For 11n HT20 (5.2 GHz band): MCS1

For 11n HT40 (5.2 GHz band): MCS0

Peak Power Spectral Density was investigated in the 11b mode at Low Channel, for individual chains versus combiner, and it was determined that combiner is worst-case; therefore, all other measurements of PPSD in other channels and modes were performed using a combiner.

RF Conducted Spurious was investigated in the 11a mode for Low Channel, for individual chains versus combiner, and it was determined that combiner is worst-case; therefore, all other measurements of RF conducted spurious were performed with combiner in the 5.2 GHz band.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Delta Elect., Inc.	611-0265	EH310BRPP5X	N/A
PowerBook	Apple	MediaMac G4	PT382989	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	2m	N/A
2	DC	2	DC	Un-shielded	2m	N/A
3	Ethernet	1	RJ45	Un-shielded	1.5m	N/A

TEST SETUP

The EUT is connected to a support laptop computer during the tests. Test software exercised the radio card

SETUP DIAGRAM FOR TESTS

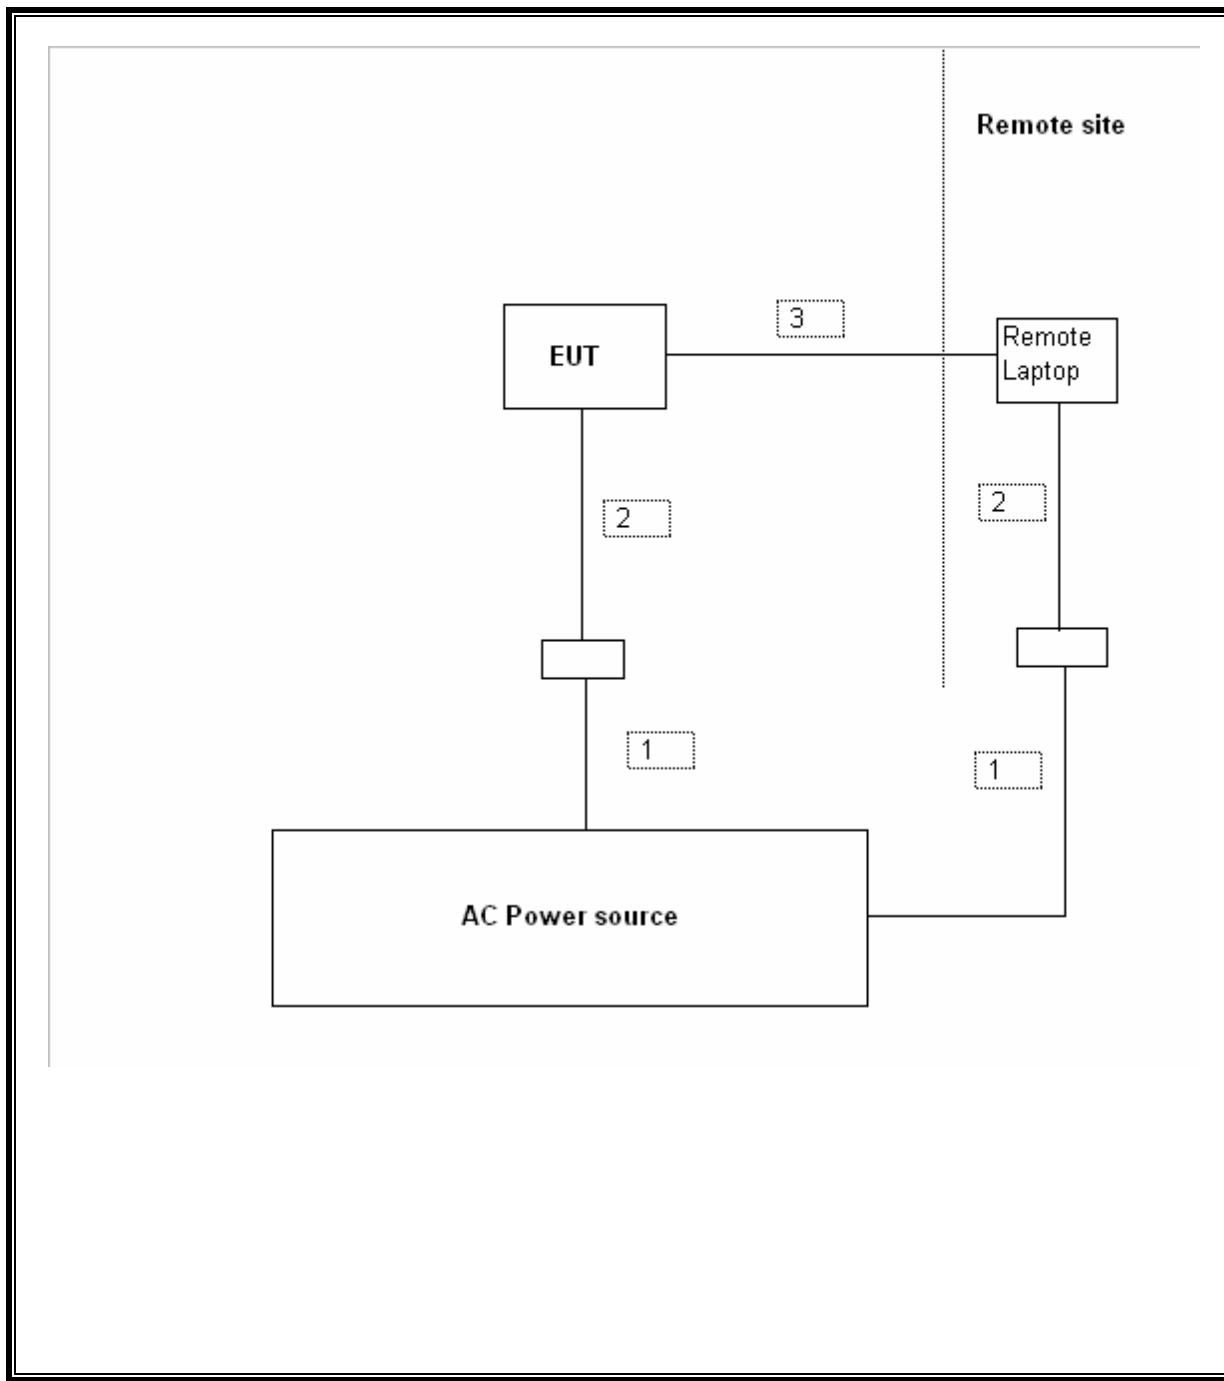

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/04/09
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/07/09
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY43360112	10/08/09
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	09/29/09
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	09/27/09
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	10/15/09
EMI Test Receiver	R & S	ESHS 20	827129/006	09/27/09
SA Display Section 2	Agilent / HP	85662A	2816A16696	09/29/09
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	09/29/09
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	09/29/09
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A121003	09/28/09
Preamp 30-1000MHz	Sonoma	310N	185623	07/20/09
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	10/11/09
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	01/29/10
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	04/29/09

7. ANTENNA PORT TEST RESULTS

7.1. 802.11a MODE IN THE 5.2 GHz BAND

7.1.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter outputs are connected to the spectrum analyzer via a combiner. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.


RESULTS

Mode Channel	Frequency (MHz)	99% BW AP2 (MHz)	99% BW AP4 (MHz)	26 dB BW AP2 (MHz)	26 dB BW AP4 (MHz)
802.11a Mode					
Low	5180	16.6825	16.6278	19.562	21.944
Middle	5220	16.6604	16.5210	19.289	21.452
High	5240	16.2153	16.4251	19.294	22.437
802.11n HT20 Mode					
Low	5180	17.5894	17.5613	20.936	20.225
Middle	5220	17.337	17.6992	21.305	21.201
High	5240	17.6337	17.6025	21.294	21.372
802.11n HT40 Mode					
Low	5190	36.0552	36.0407	42.611	41.255
High	5230	36.2208	36.0812	41.118	41.074



26 dB and 99% BANDWIDTH


(802.11a MODE AP2)

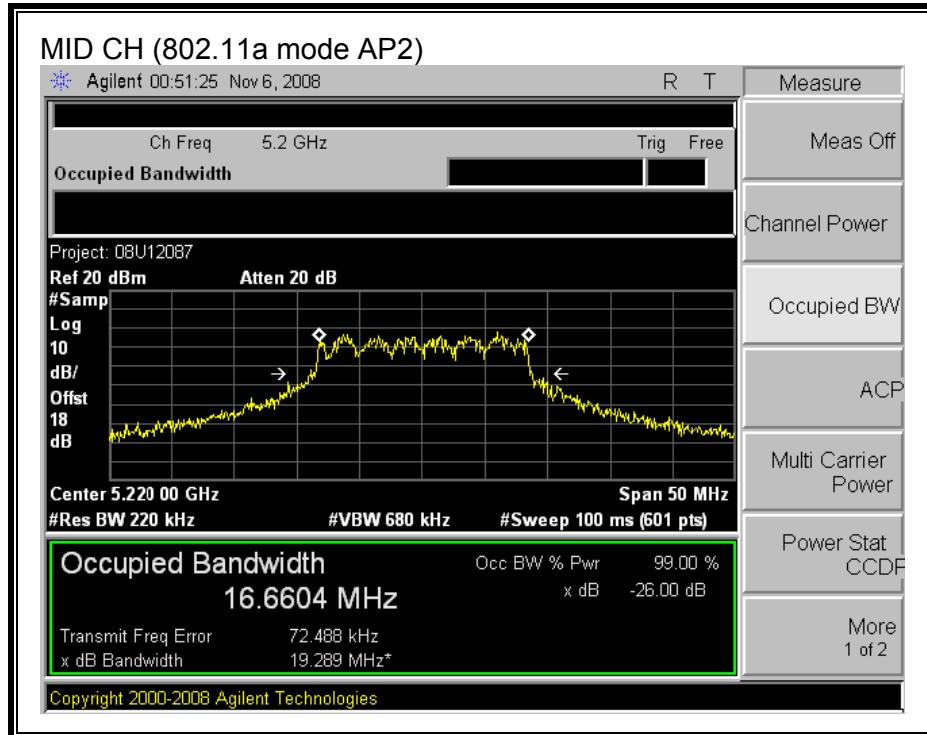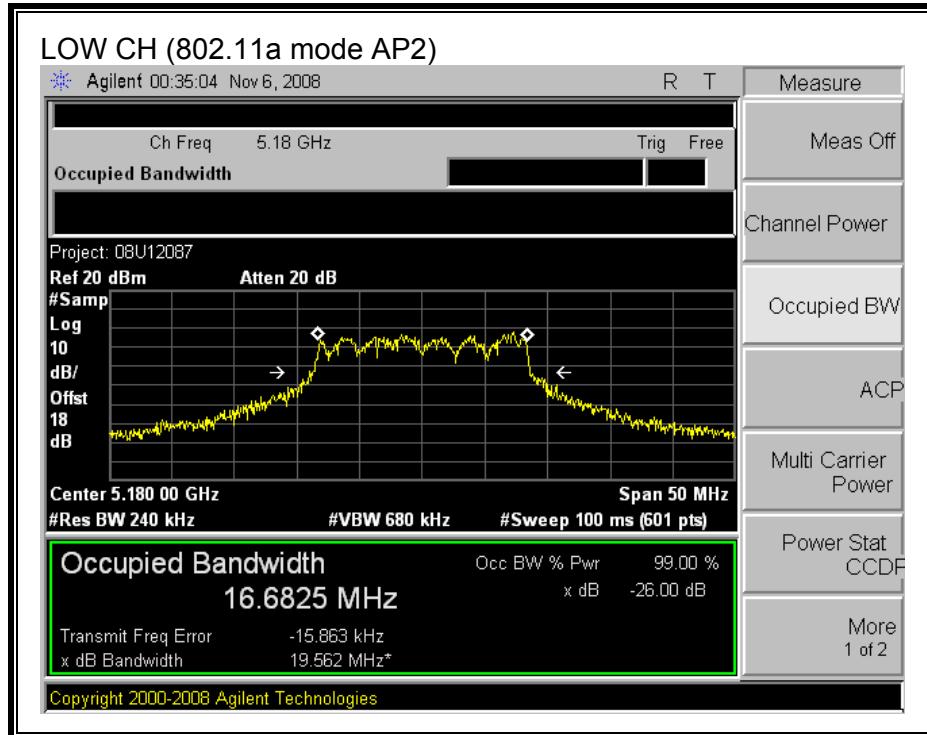


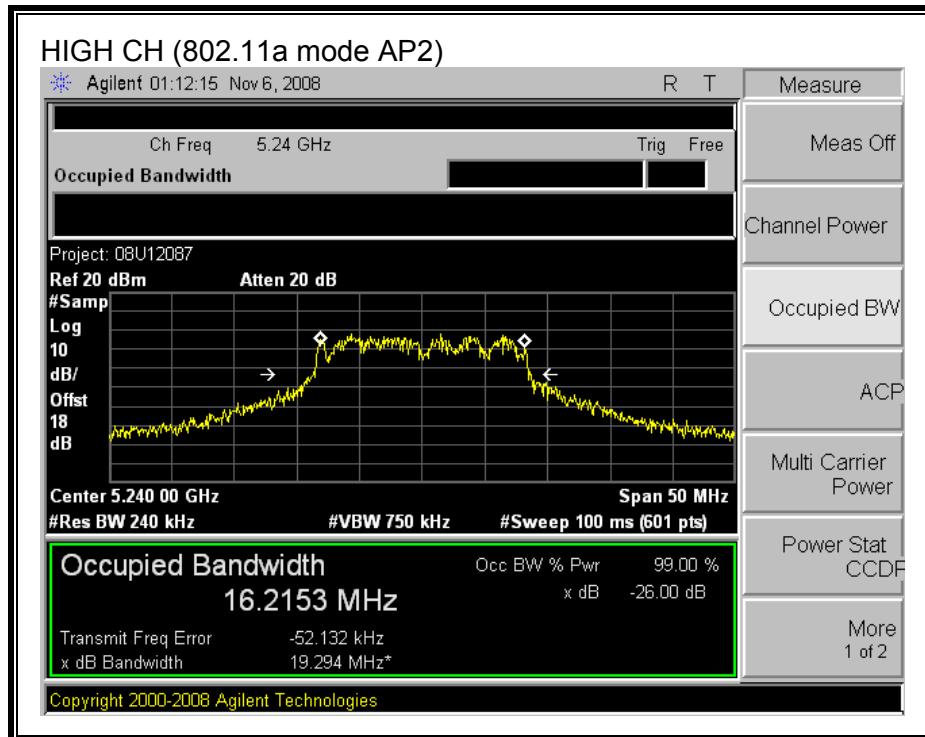



(802.11a MODE AP4)

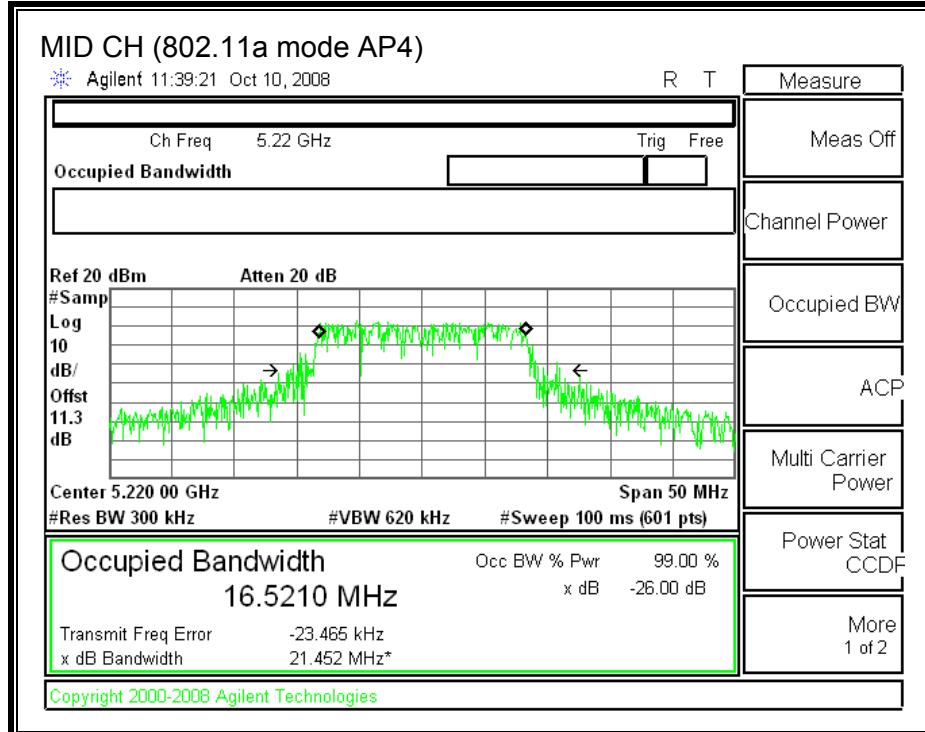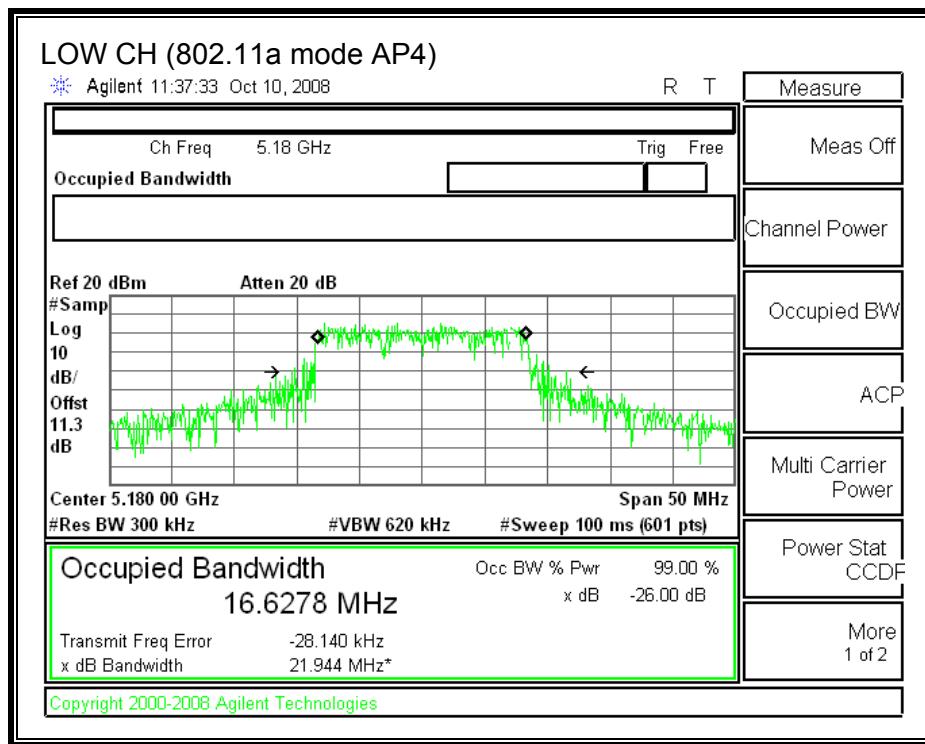


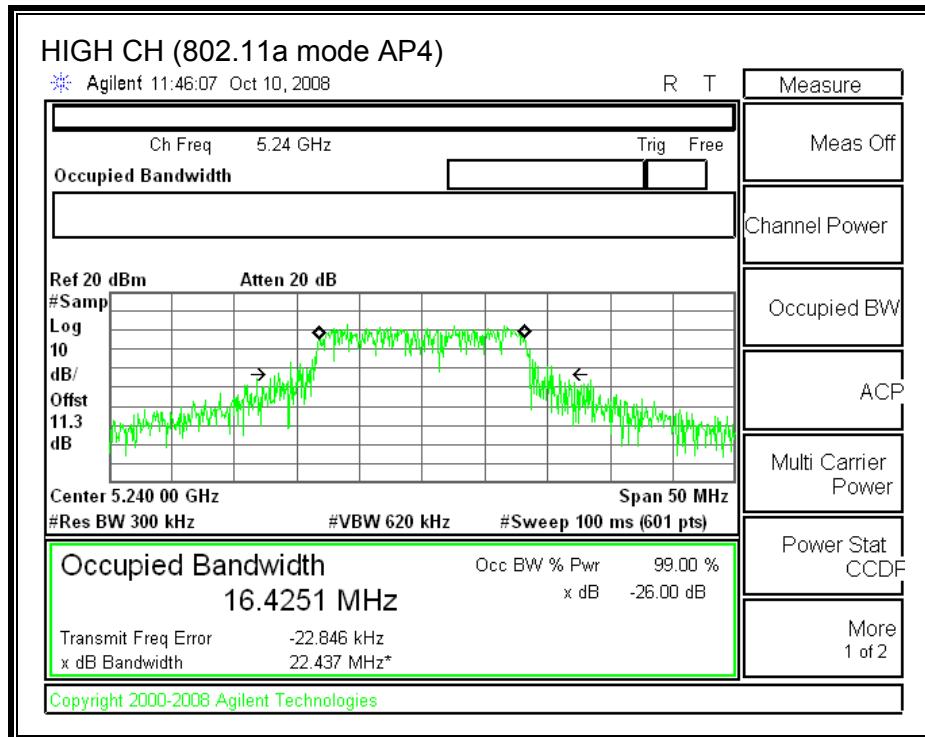



(802.11n HT20 MODE AP2)

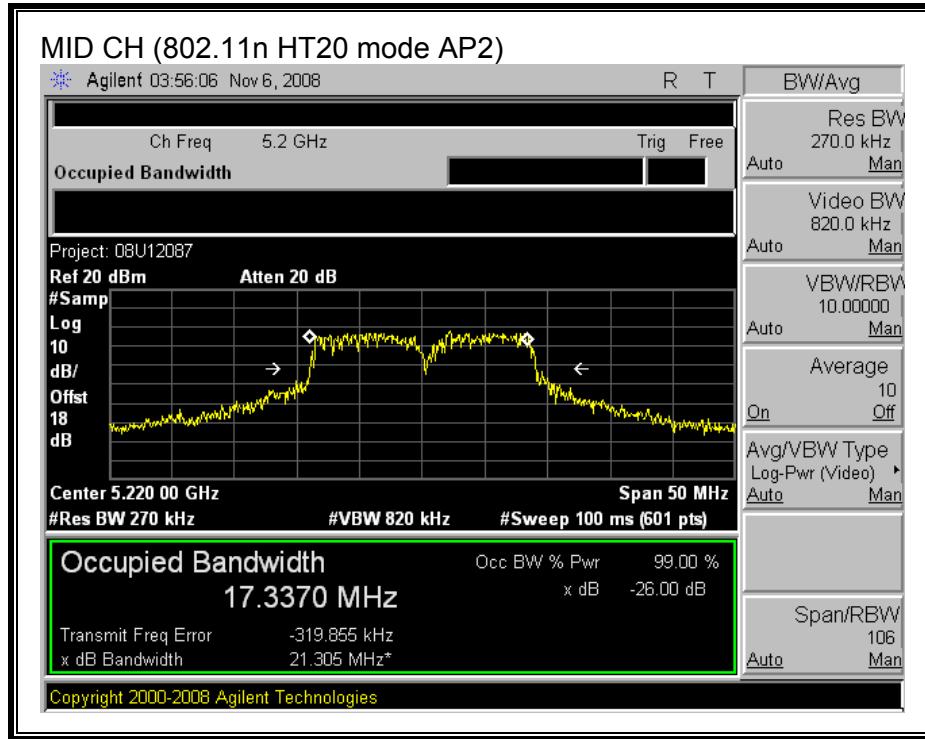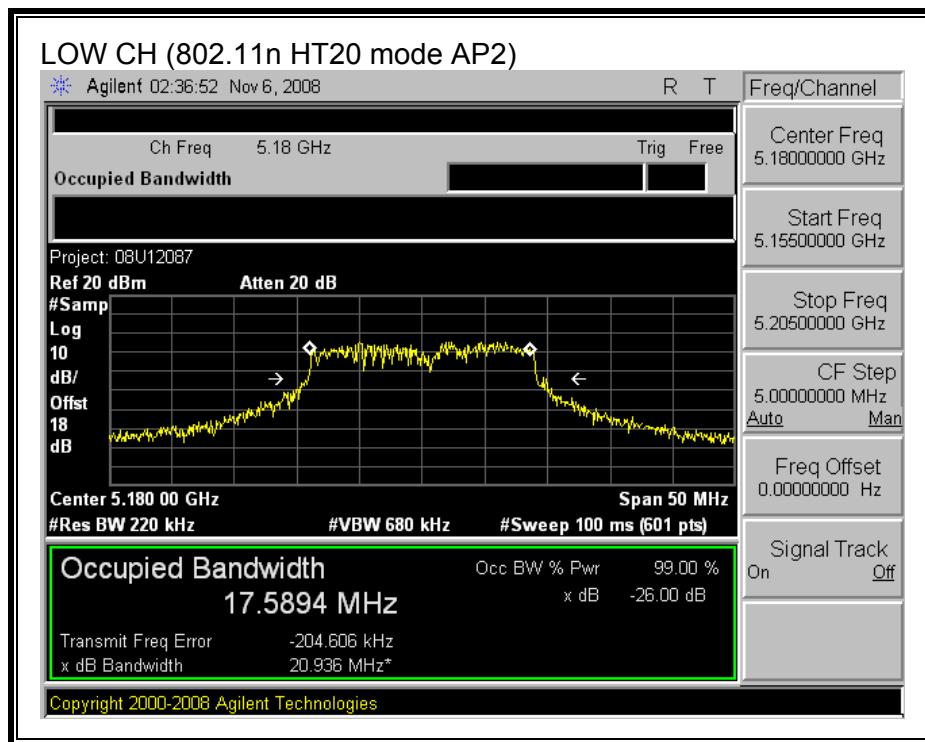


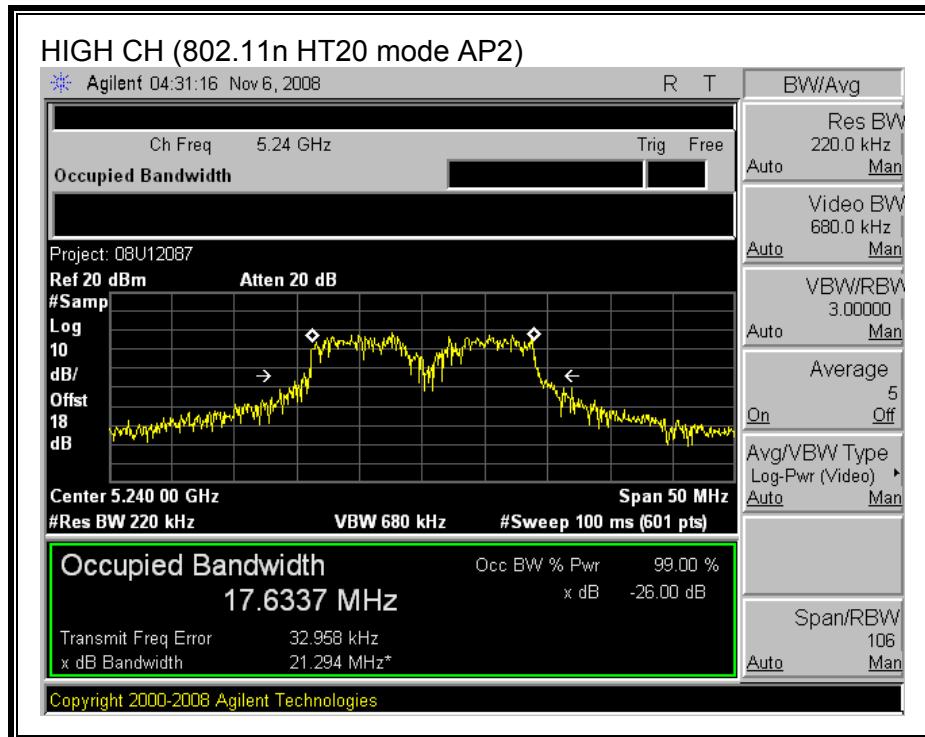


(802.11 HT20 MODE AP4)

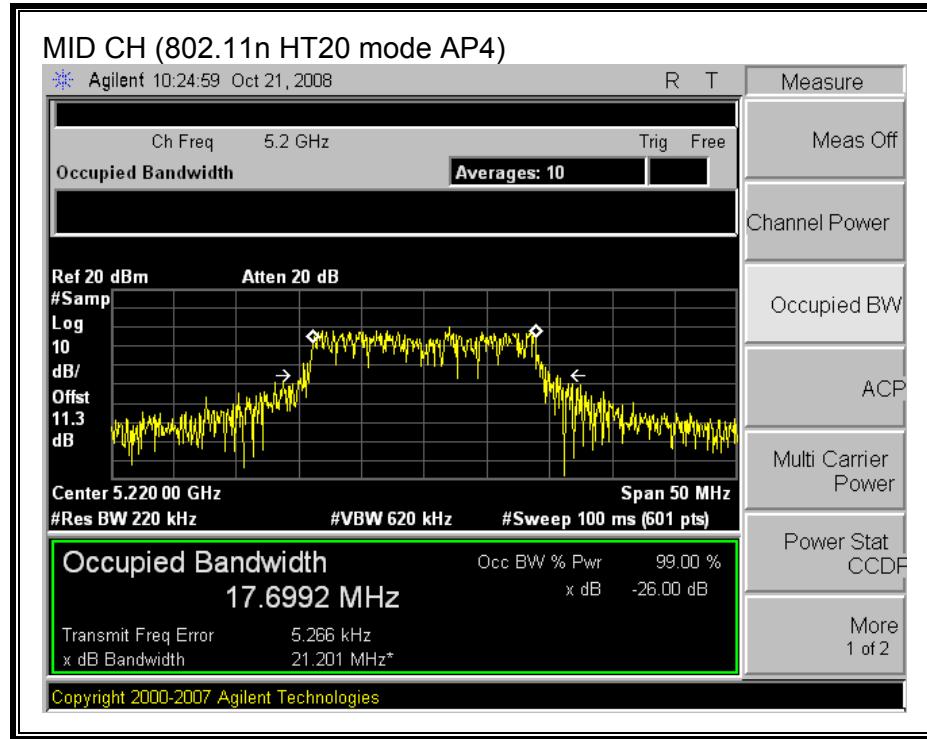
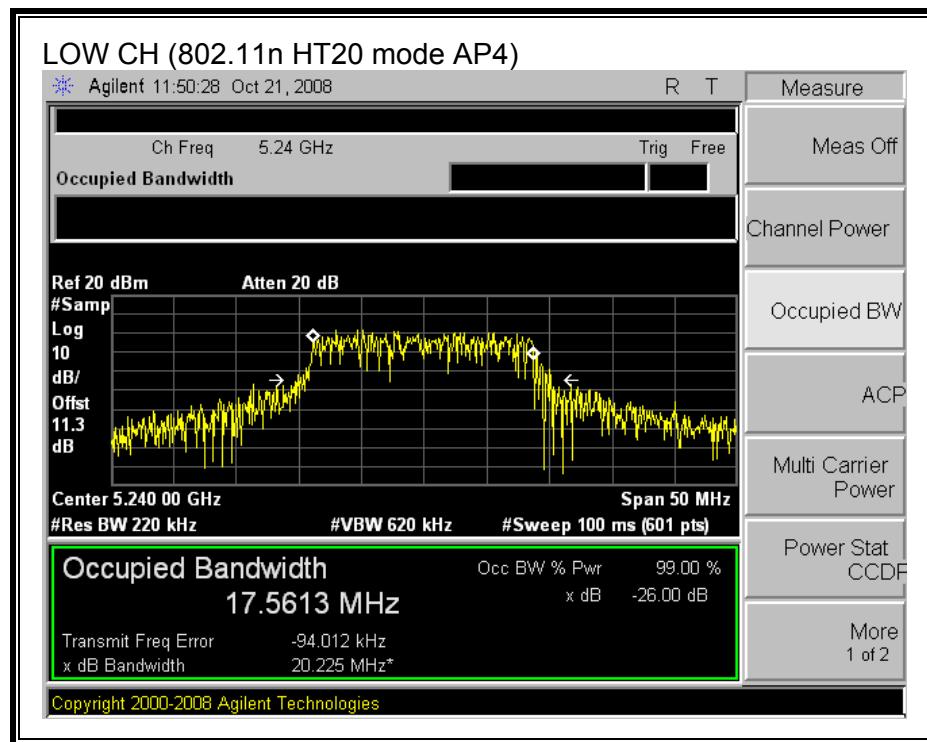


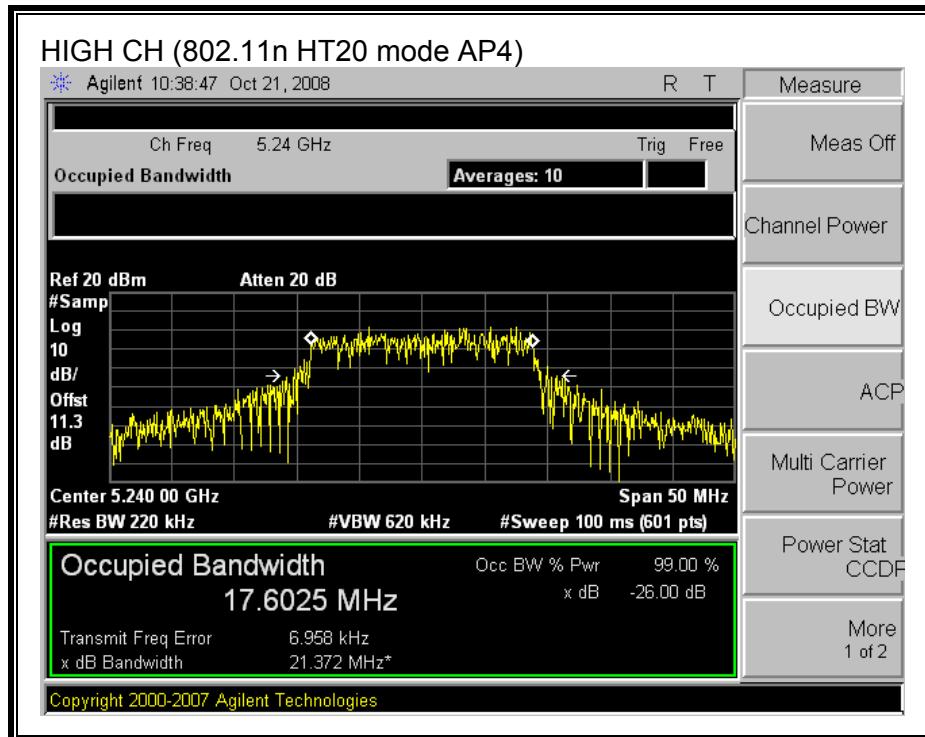

(802.11 HT40 MODE AP2)

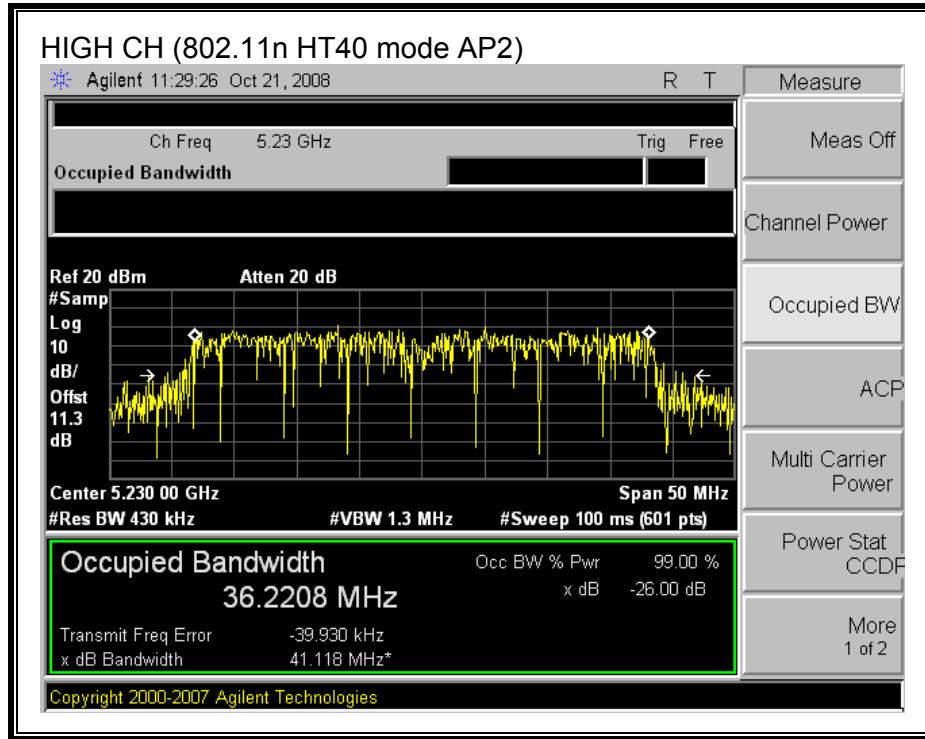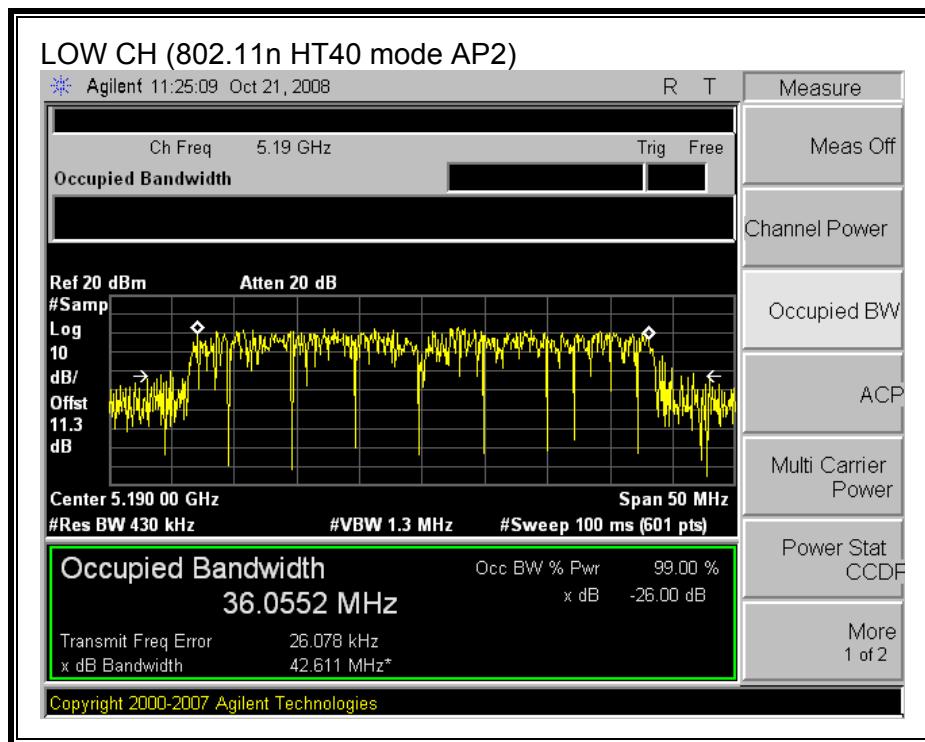

(802.11 HT40 MODE AP4)

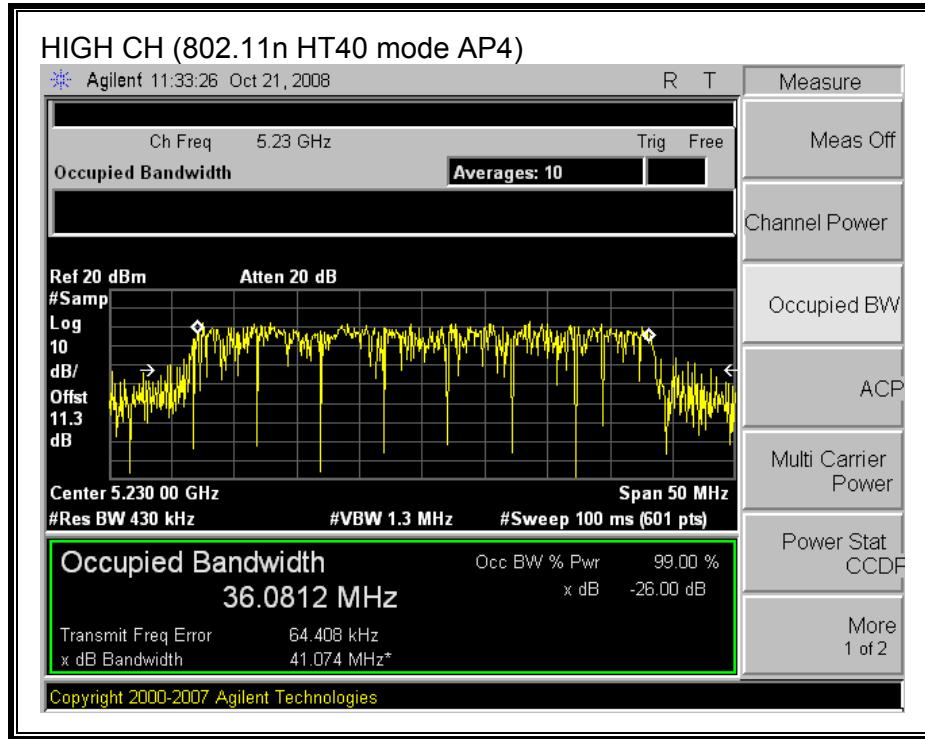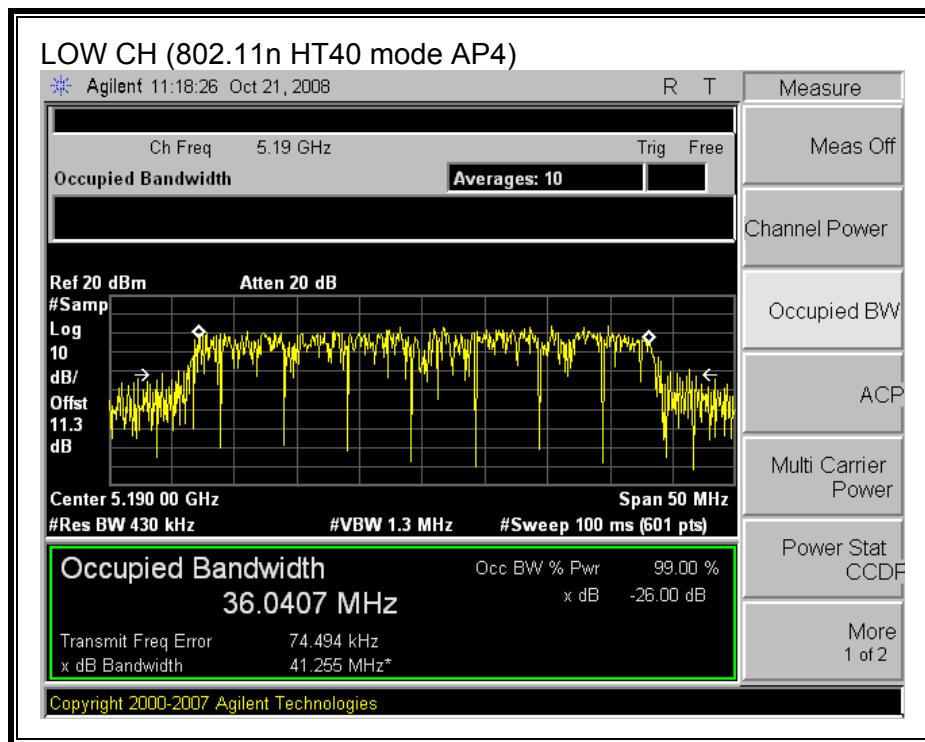

7.1.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{A}} (\text{Chain 0 Power} / 10) + 10^{\text{B}} (\text{Chain 2 Power} / 10))$

RESULTS

802.11a MODE

The combined antenna gain = $10 \log (10^{(AG1/10)} + 10^{(AG2/10)})$
The combined antenna gain = **6.94 dBi**



Limit


Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	19.562	16.91	6.94	15.97
Mid	5200	17	19.289	16.85	6.94	15.91
High	5240	17	19.294	16.85	6.94	15.91

Individual Chain Results


Channel	Frequency (MHz)	AP2 Power (dBm)	AP4 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	12.47	9.13	14.12	15.97	-1.85
Mid	5220	10.03	9.58	12.82	15.91	-5.88
High	5240	9.83	9.44	12.65	15.91	-6.08



AP 2 OUTPUT POWER

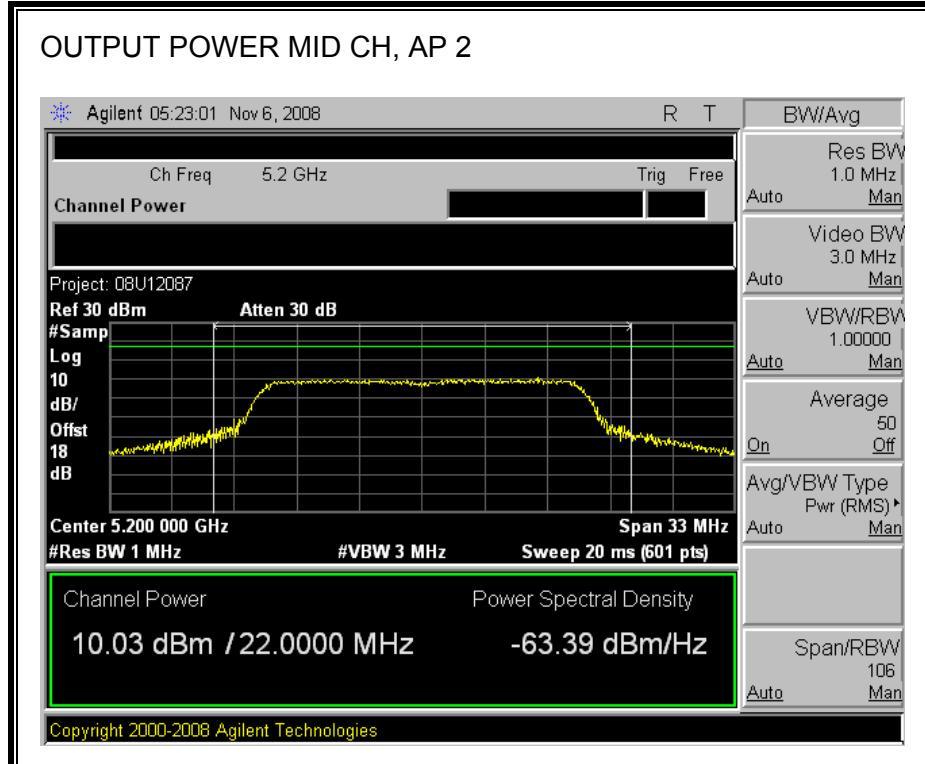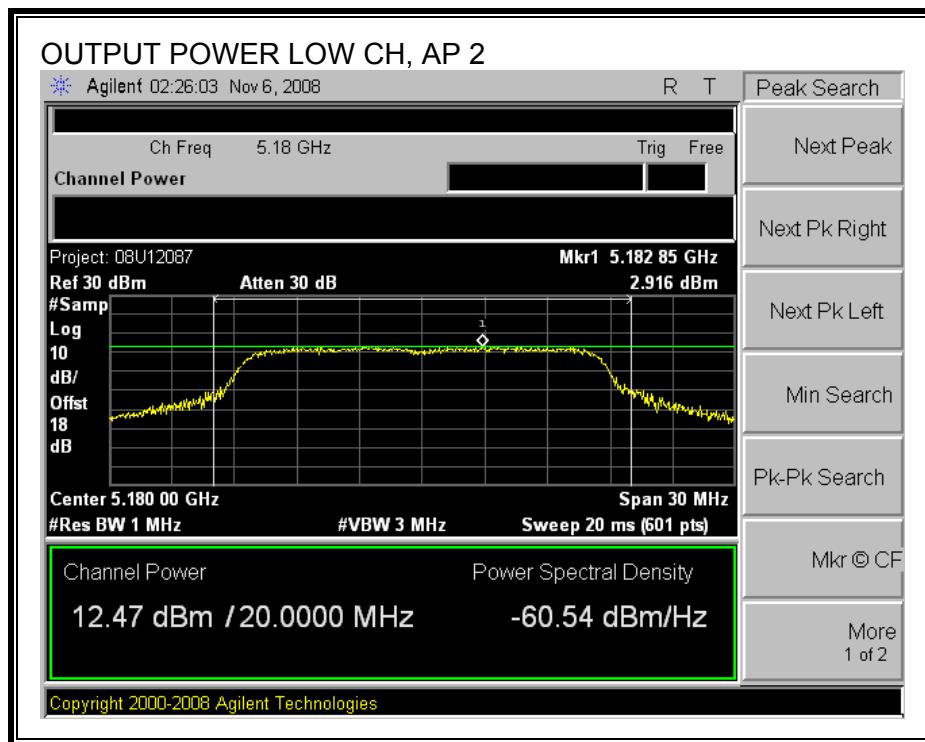

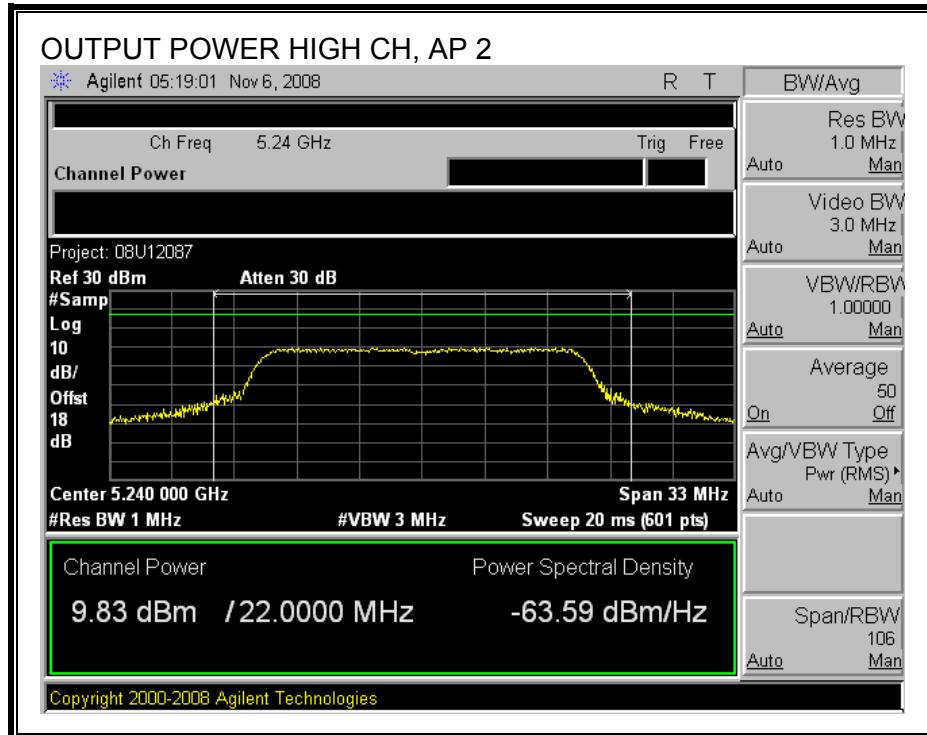

AP 4 OUTPUT POWER

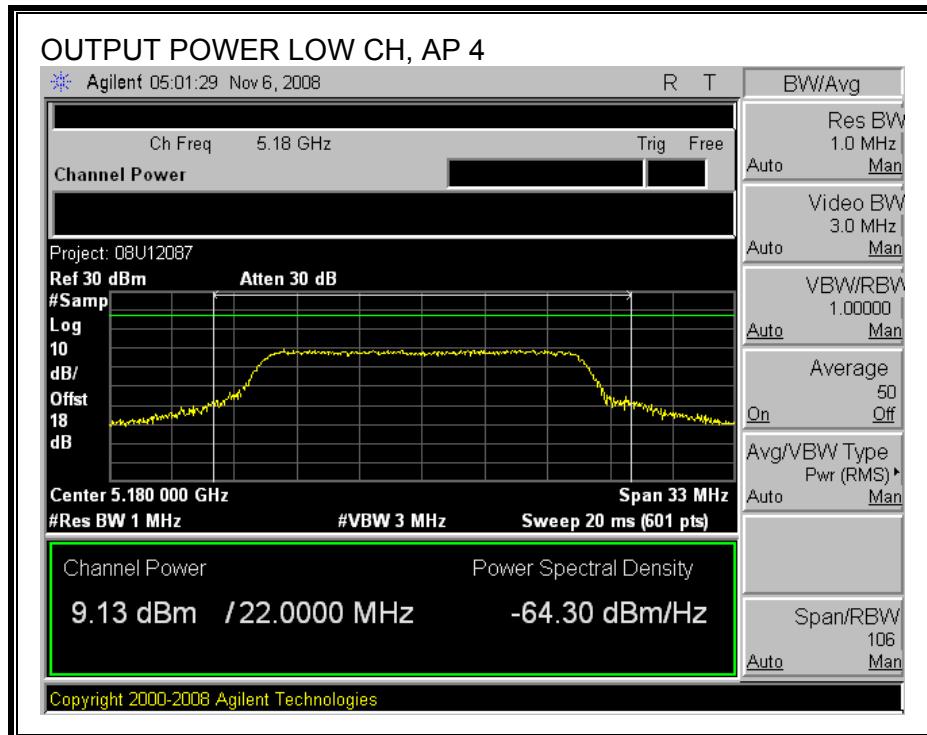

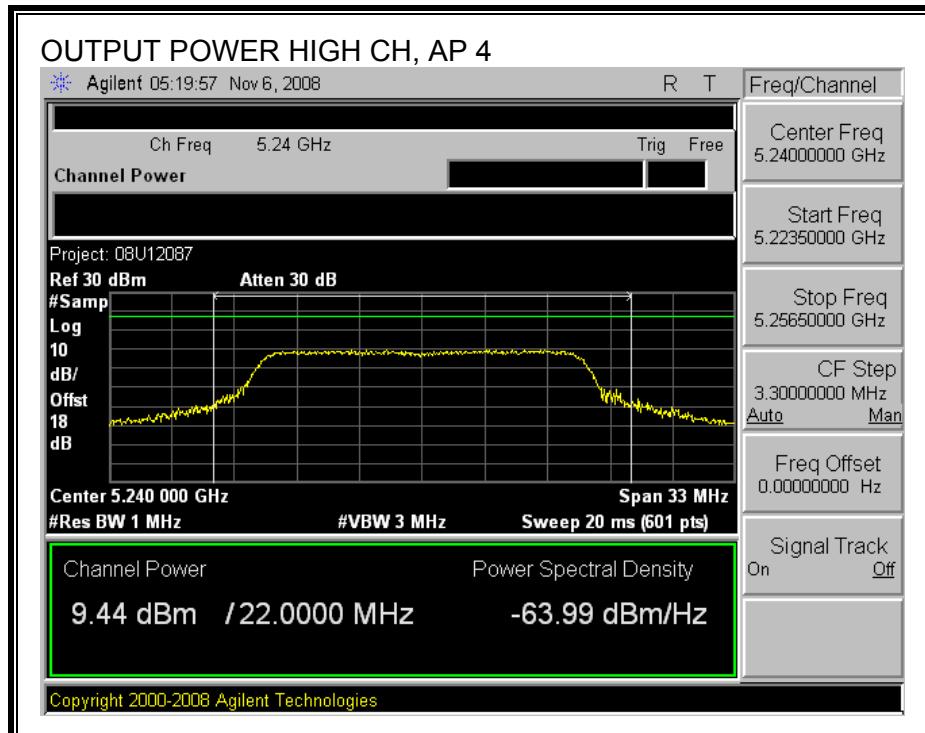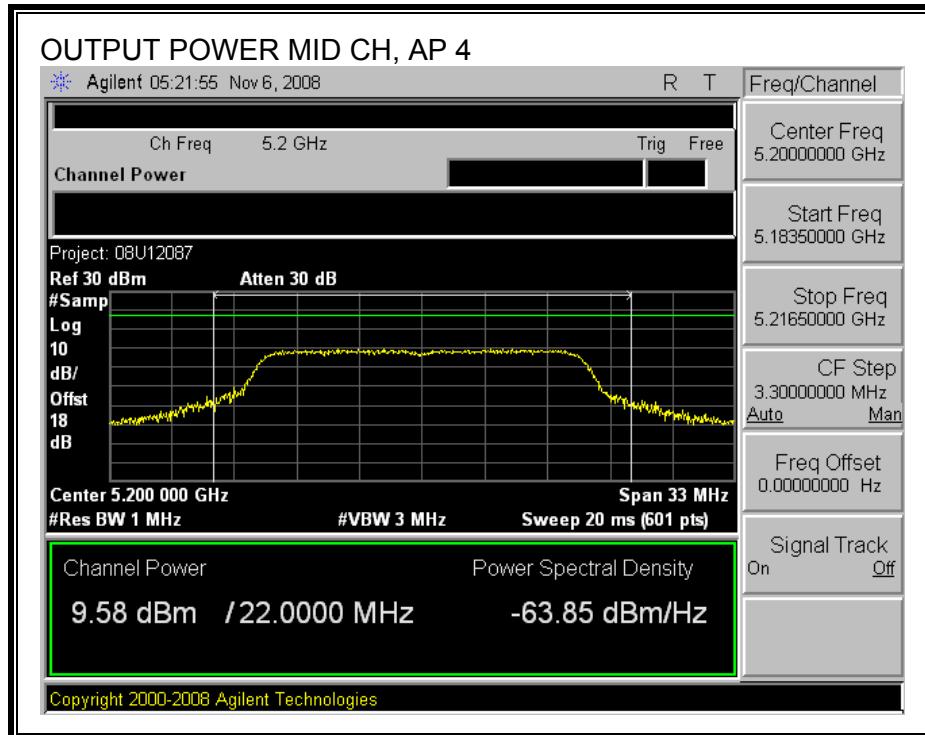

802.11n HT20 MODE



Limit


Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	20.225	17.06	4.21	17.00
Mid	5200	17	21.201	17.26	4.21	17.00
High	5240	17	21.294	17.28	4.21	17.00

Individual Chain Results


Channel	Frequency (MHz)	AP 2 Power (dBm)	AP 4 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	9.90	9.74	12.83	17.00	-4.17
Mid	5200	9.68	9.74	12.72	17.00	-4.28
High	5240	9.97	9.92	12.96	17.00	-4.04



AP 2 OUTPUT POWER

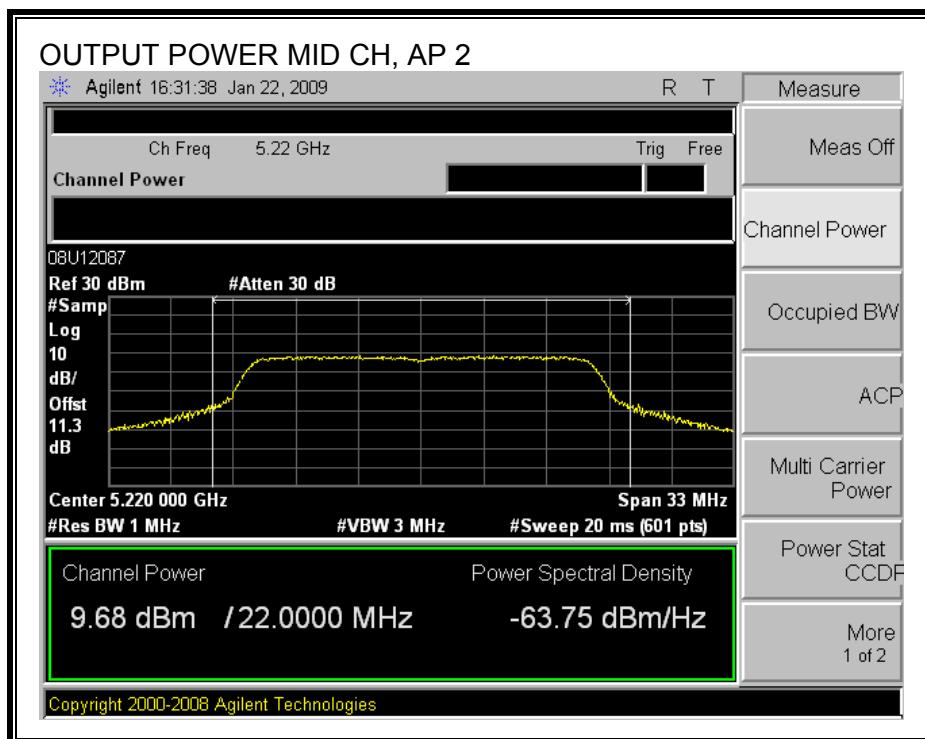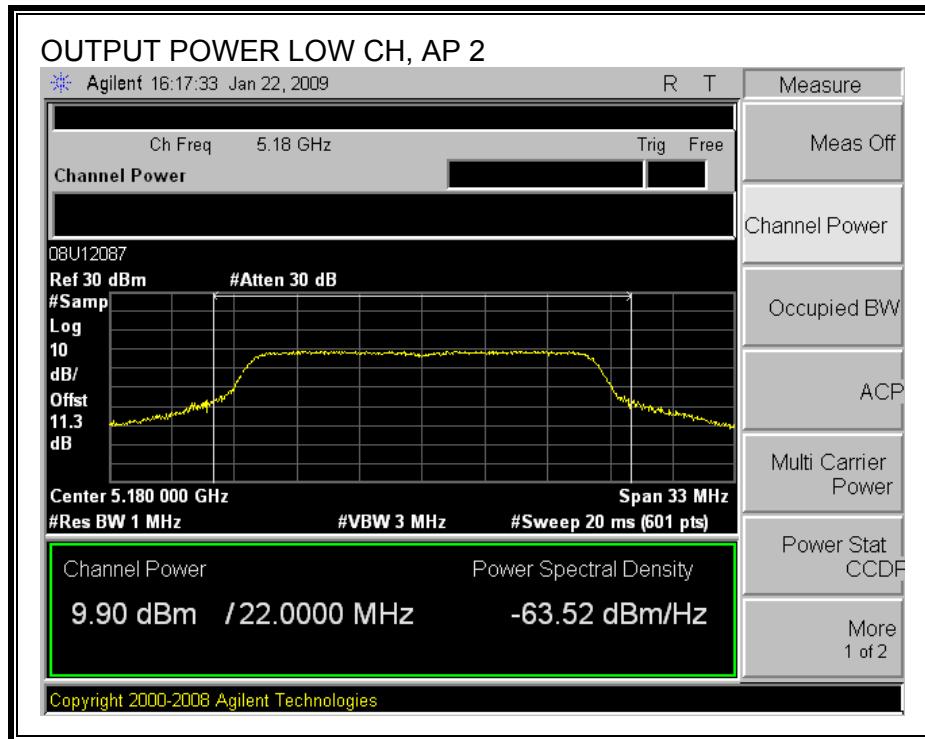

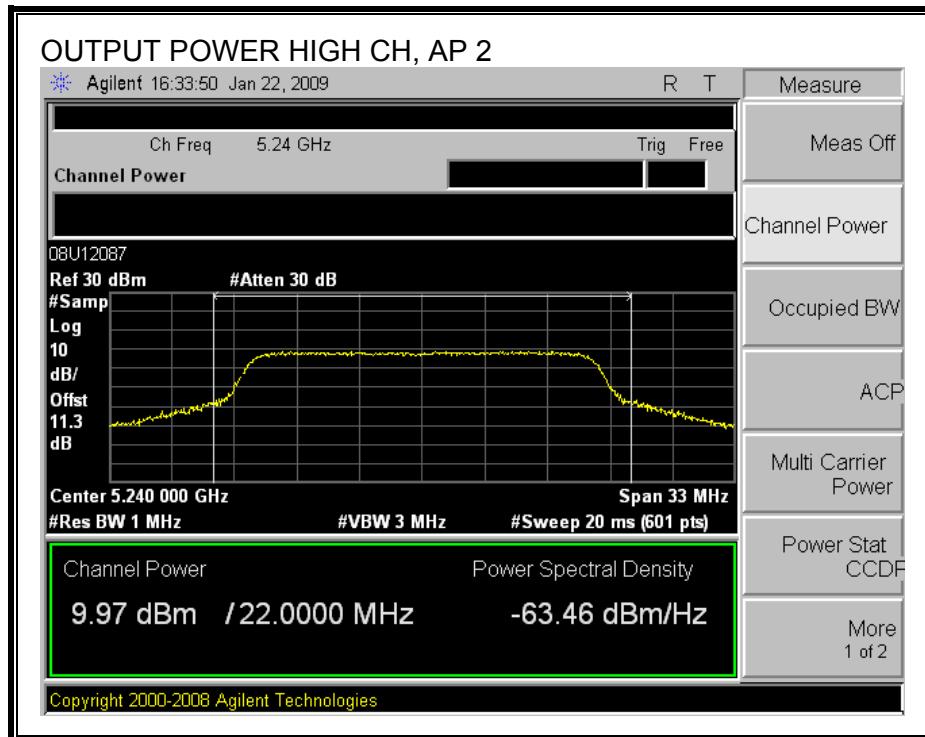

AP 4 OUTPUT POWER

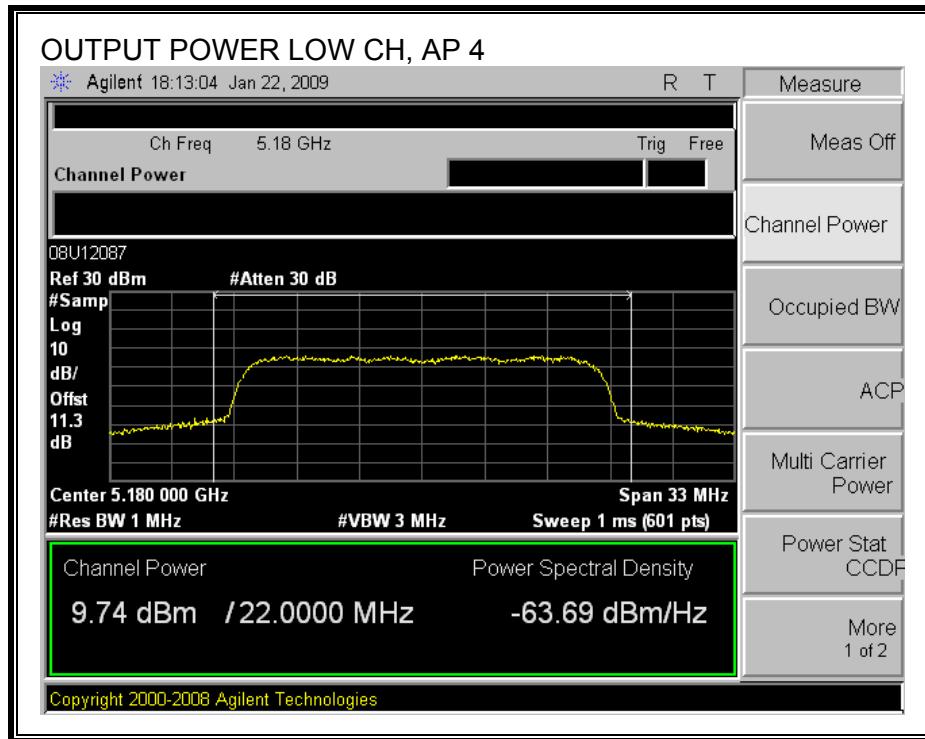

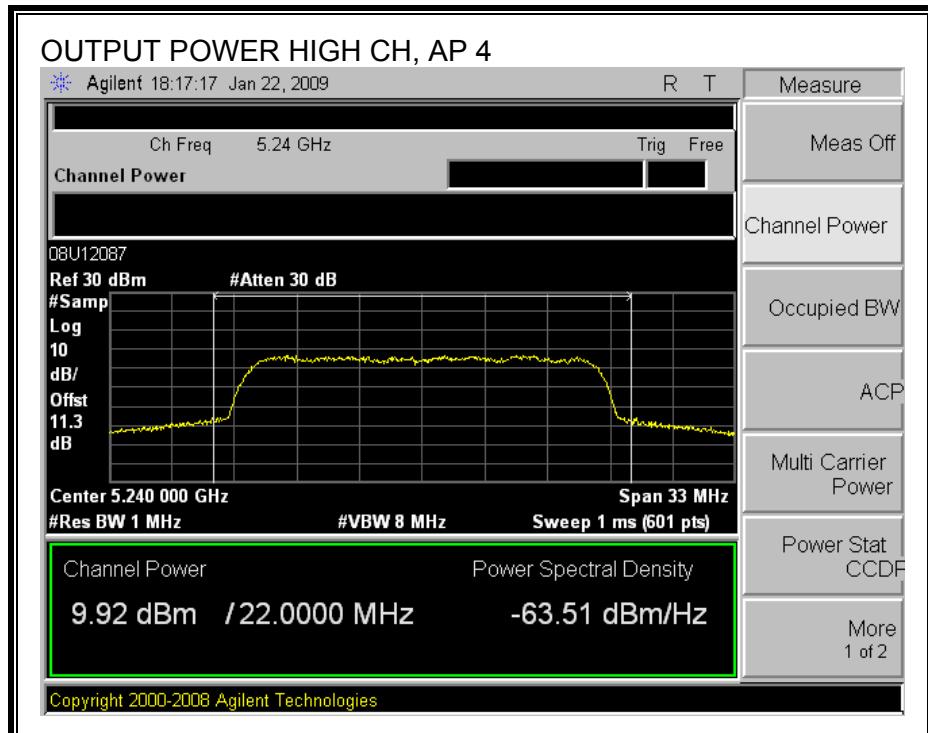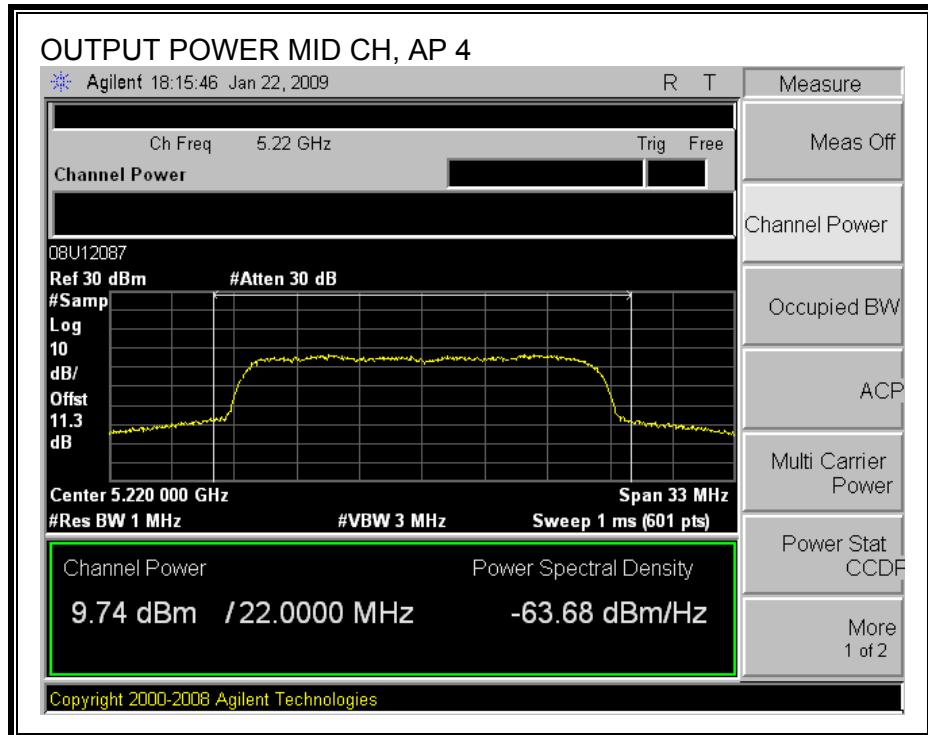

802.11n HT40 MODE

RESULTS



Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5190	17	42.255	20.26	4.21	17.00
High	5230	17	41.074	20.14	4.21	17.00



Individual Chain Results

Channel	Frequency (MHz)	AP 2 Power (dBm)	AP 4 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5190	12.85	13.32	16.10	17.00	-0.90
High	5230	12.24	12.76	15.52	17.00	-1.48

AP 2 OUTPUT POWER

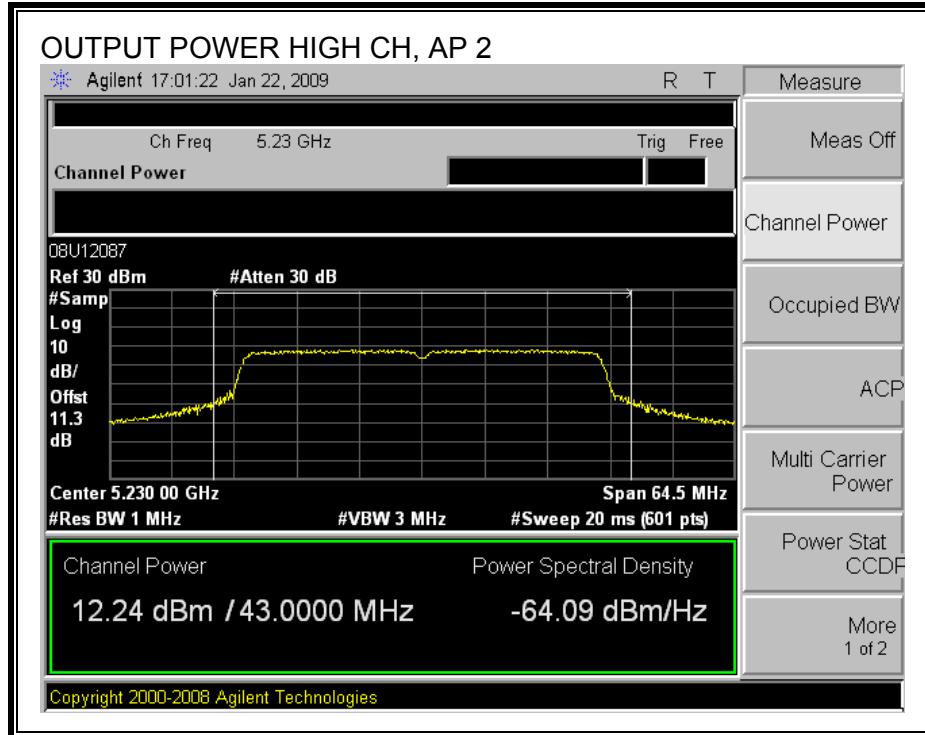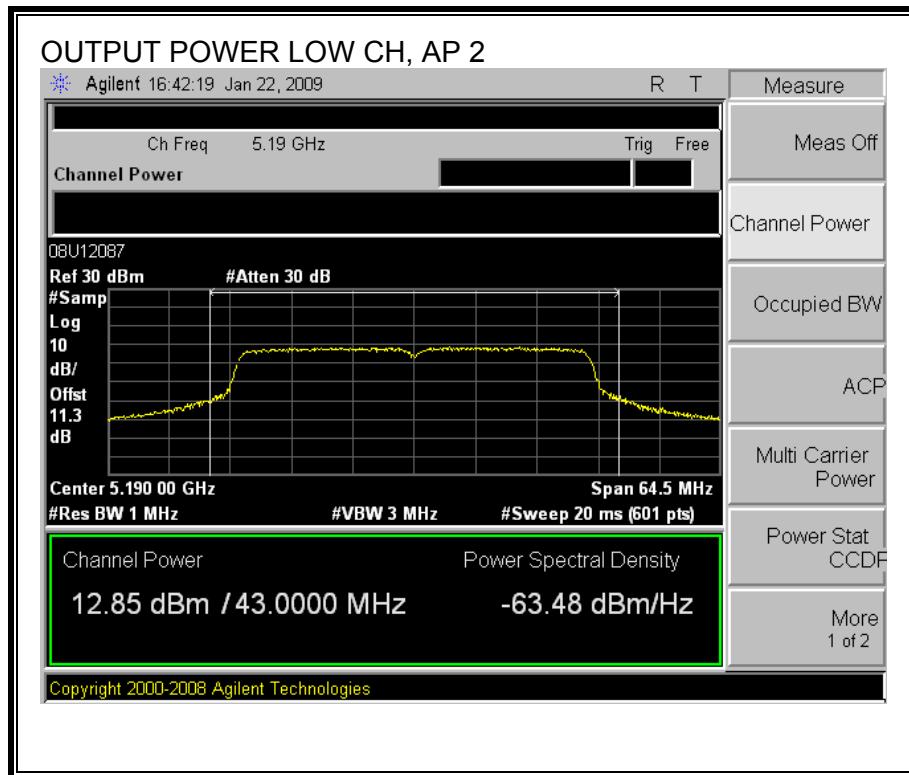

AP 4 OUTPUT POWER

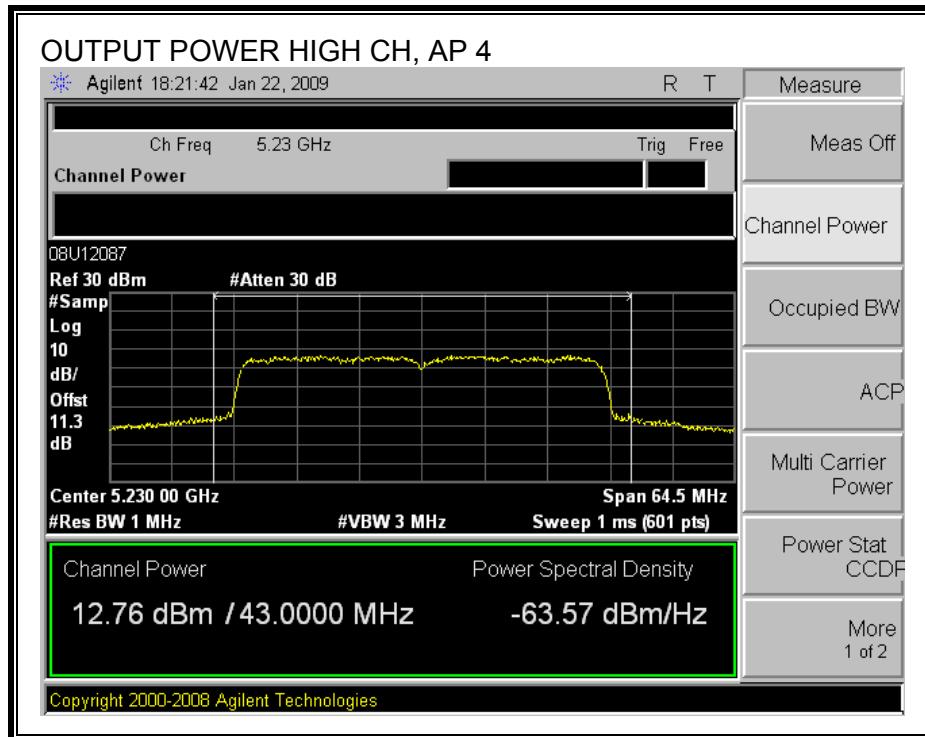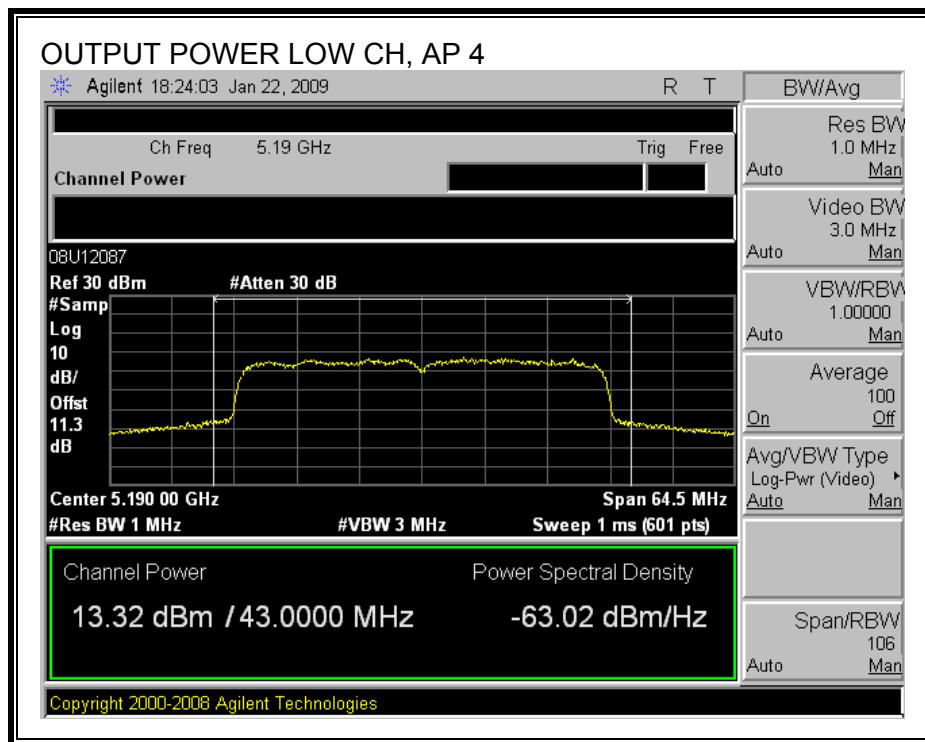

7.1.3. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 4 dBm.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS

POWER SPECTRAL DENSITY WITH COMBINER

5150 to 5250MHz Band

Antenna Gain (dBi) # 0	3.62
Antenna Gain (dBi) # 2	4.21
Effective Legacy Gain	6.94

Mode Channel	Frequency (MHz)	PPSD With Combiner (dBm)	Limit (dBm)	Margin (dB)
-----------------	--------------------	-----------------------------	----------------	----------------

802.11a Mode

Low	5180	2.969	3.06	-0.10
Middle	5220	2.965	3.06	-0.10
High	5240	2.921	3.06	-0.14



802.11n HT20 Mode


Low	5180	2.314	3.06	-0.75
Middle	5220	3.023	3.06	-0.04
High	5240	2.630	3.06	-0.43

802.11n HT40 Mode



Low	5190	2.703	3.06	-0.36
High	5230	2.529	3.06	-0.54


POWER SPECTRAL DENSITY WITH COMBINER
(802.11a MODE)

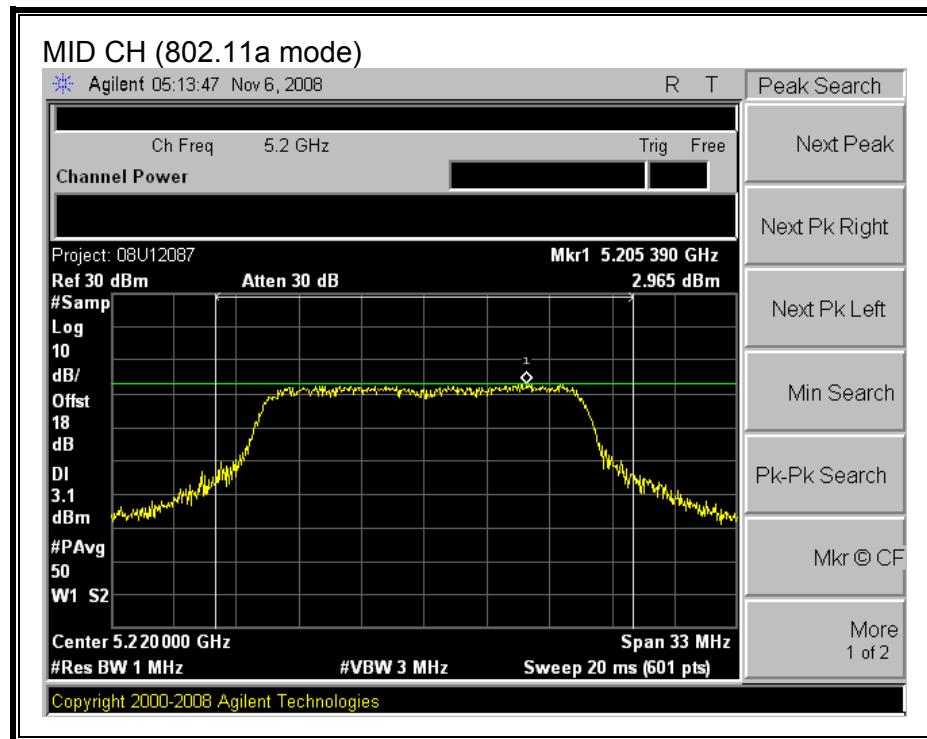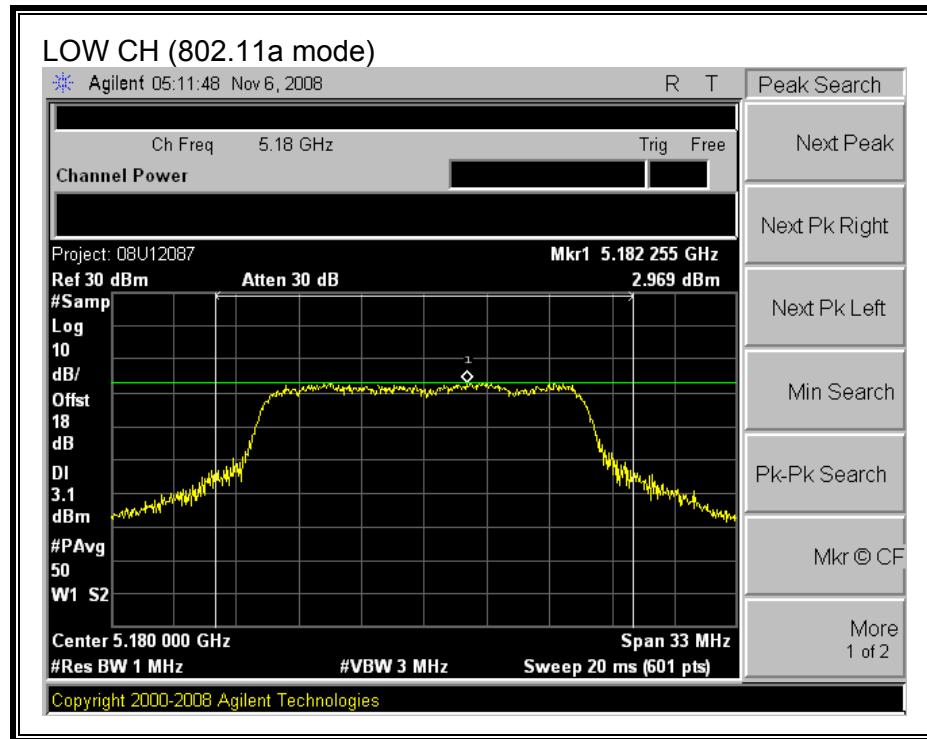


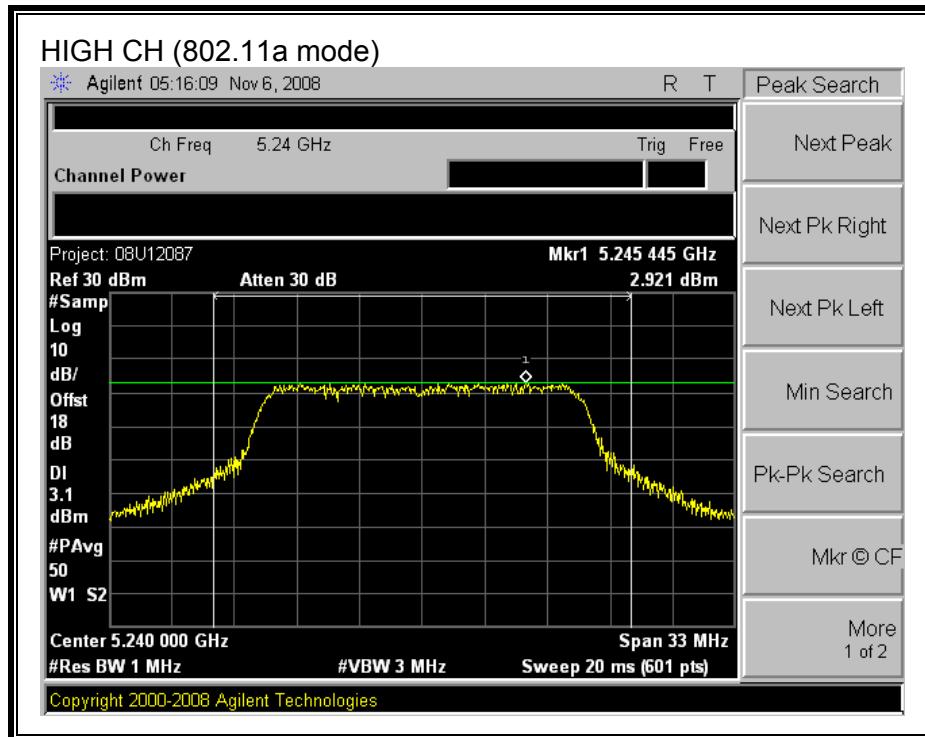


(802.11n HT20 MODE)

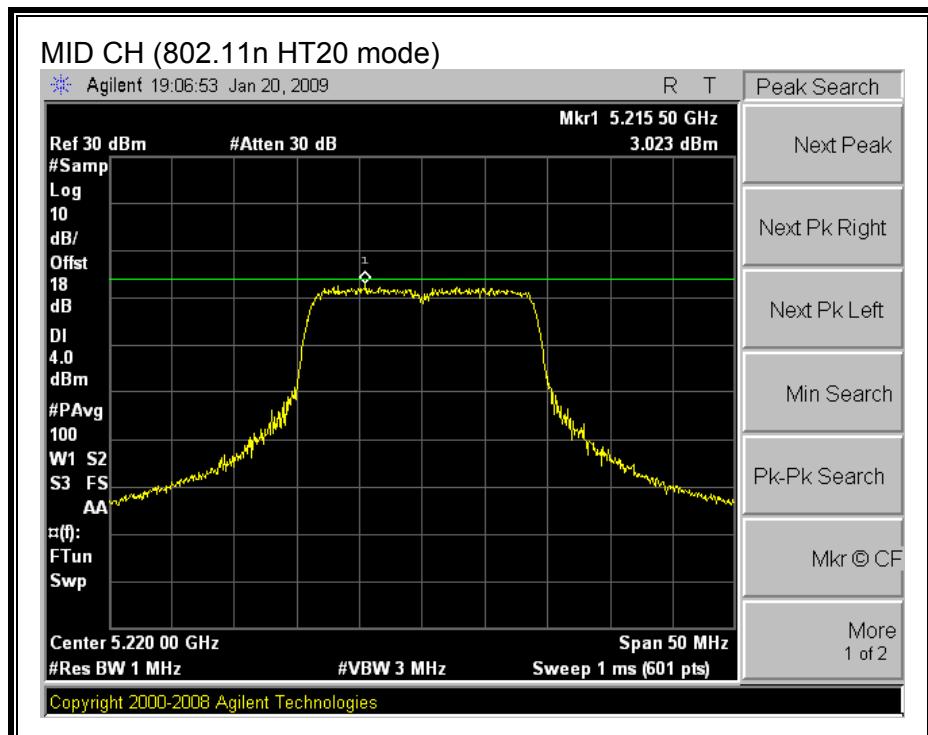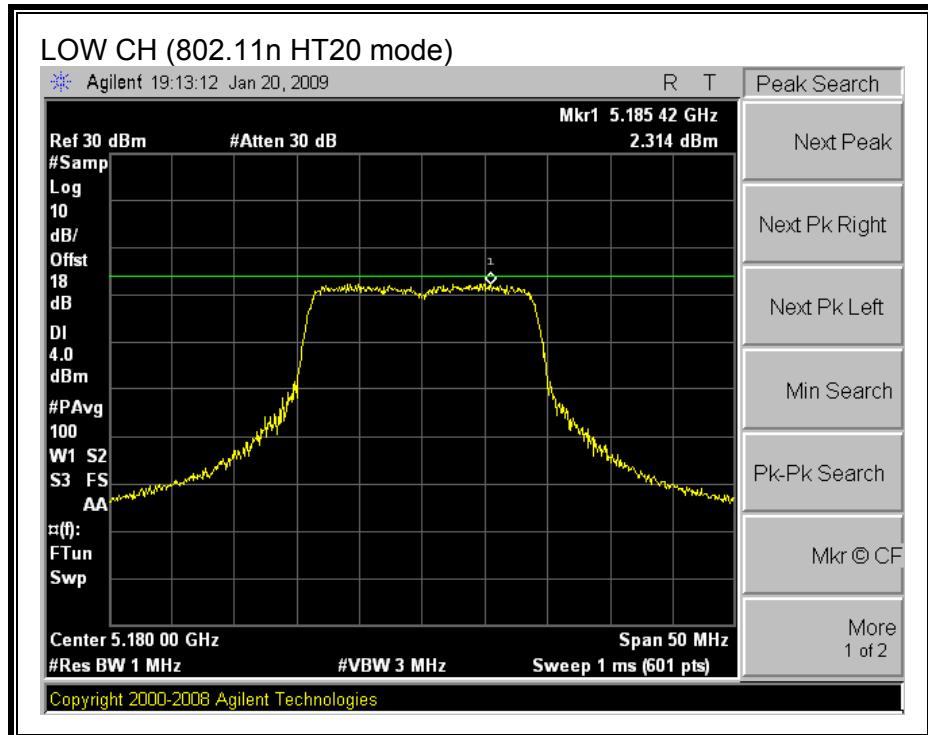

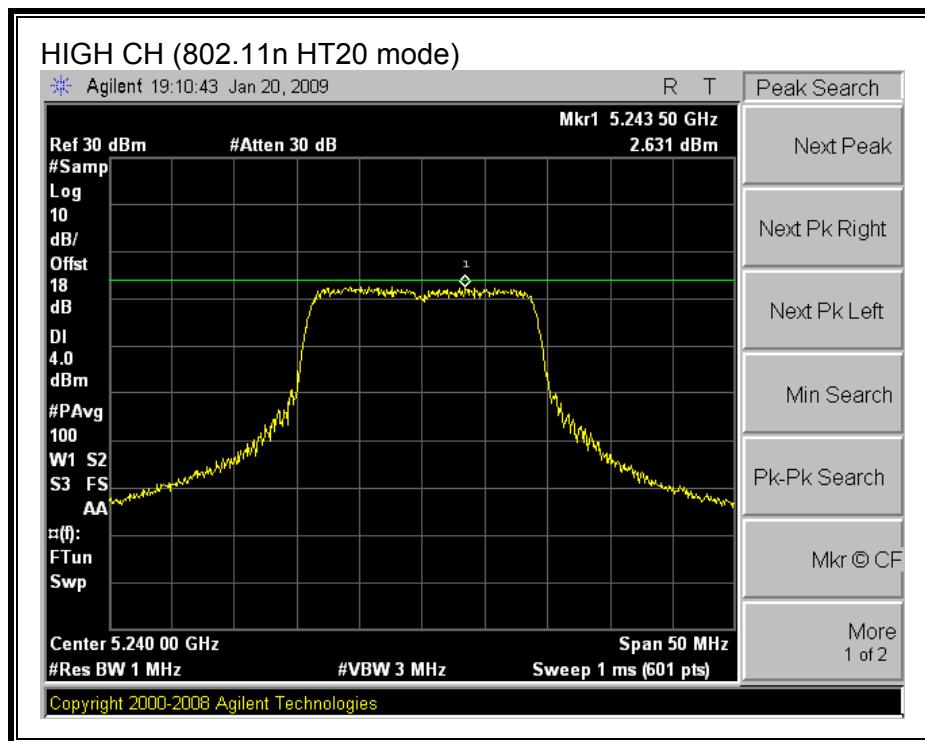

(802.11n HT40 MODE)

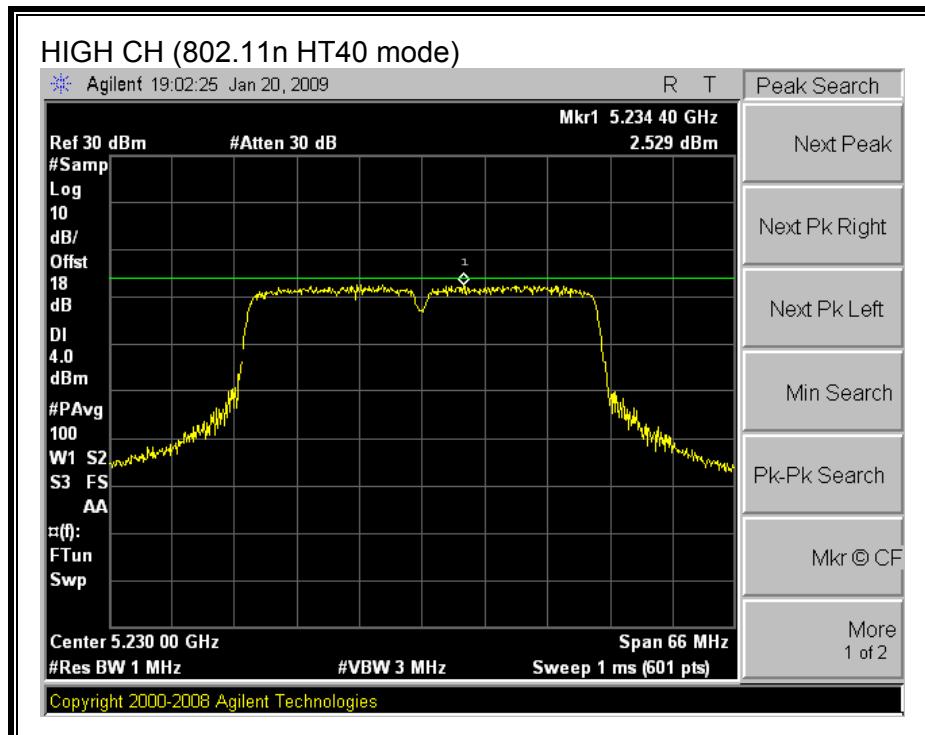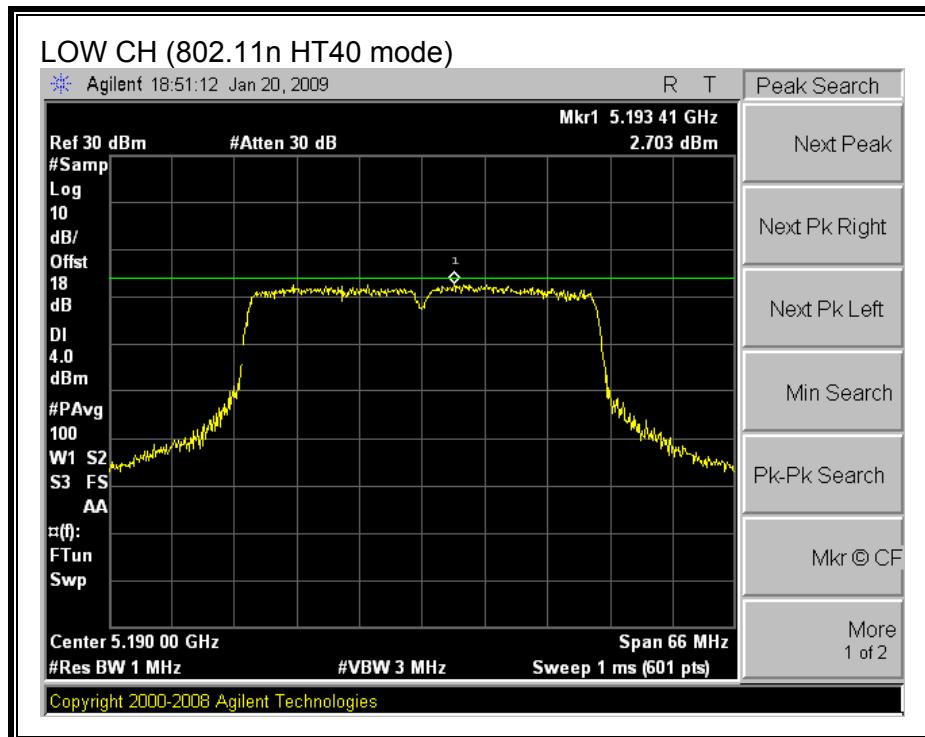

7.1.4. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Mode Channel	Frequency (MHz)	Peak Excursion AP2 (dBm)	Peak Excursion AP4 (dBm)	Limit (dBm)	Worst Case Margin (dB)
--------------	-----------------	--------------------------	--------------------------	-------------	------------------------

802.11a Mode

Low	5180	10.75	9.93	13	-2.25
Middle	5200	12.53	10.72	13	-0.47
High	5240	9.85	8.90	13	-3.15


802.11n HT20 Mode

Low	5180	9.76	11.30	13	-1.70
Middle	5200	10.79	10.52	13	-2.21
High	5240	10.77	11.48	13	-1.52


802.11n HT40 Mode

Low	5190	9.45	10.10	13	-2.90
High	5230	9.31	10.34	13	-2.66


PEAK EXCURSION
(802.11a MODE AP2)

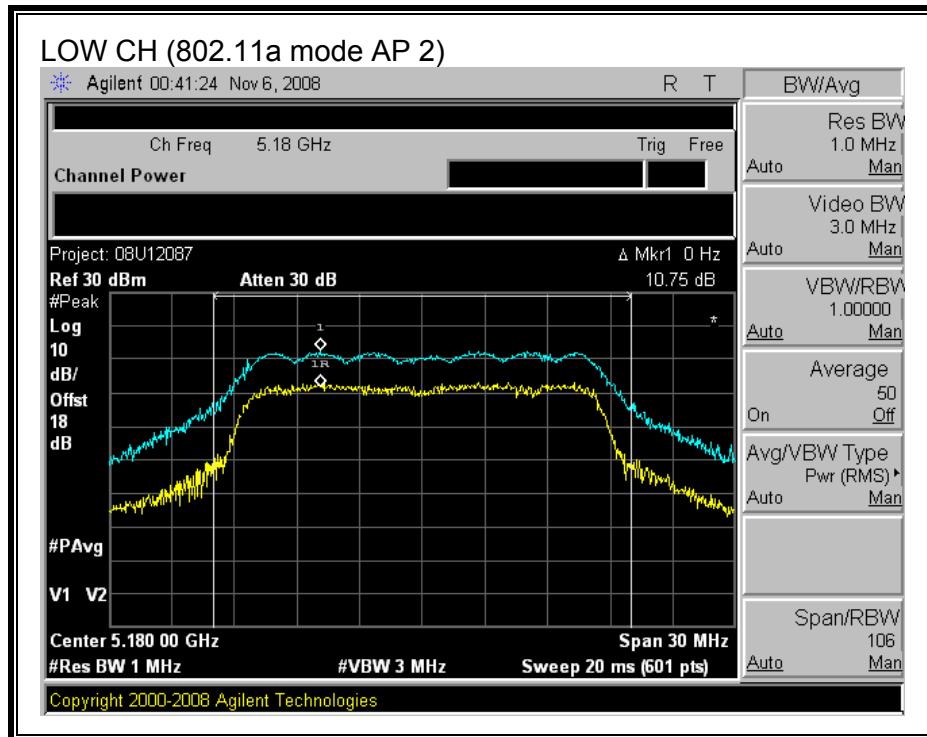


(802.11a MODE AP4)

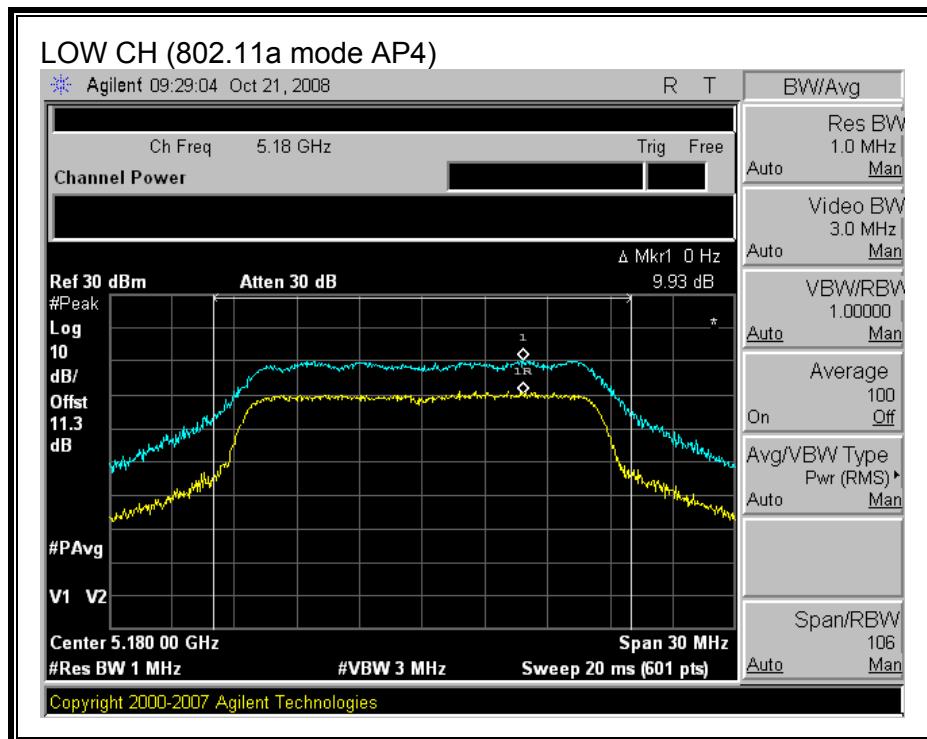


(802.11a MODE AP2)

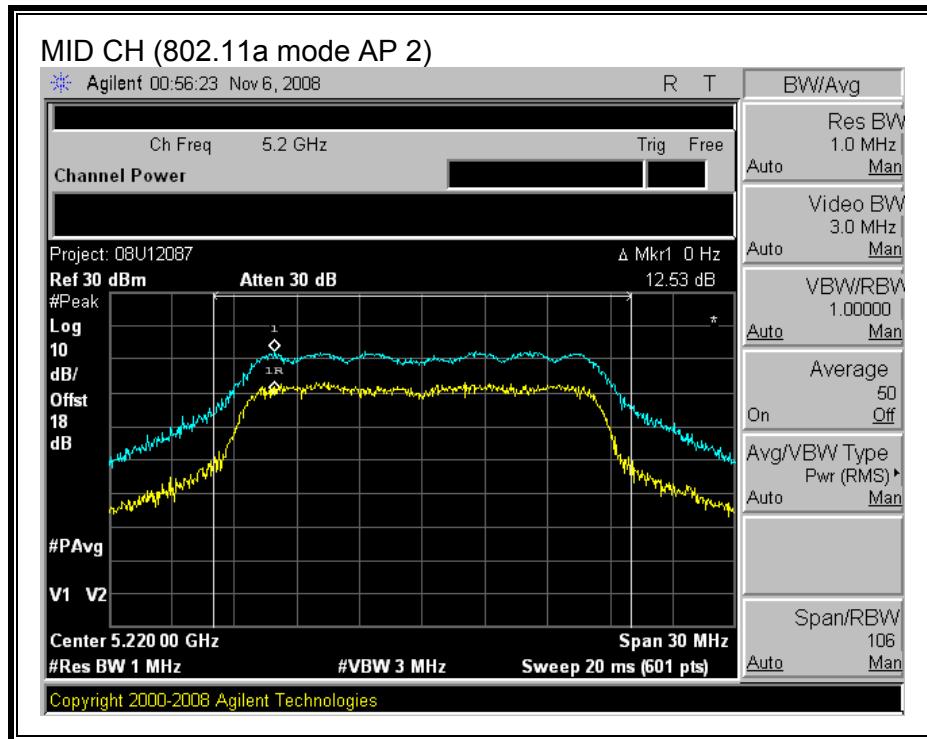


(802.11a MODE AP4)

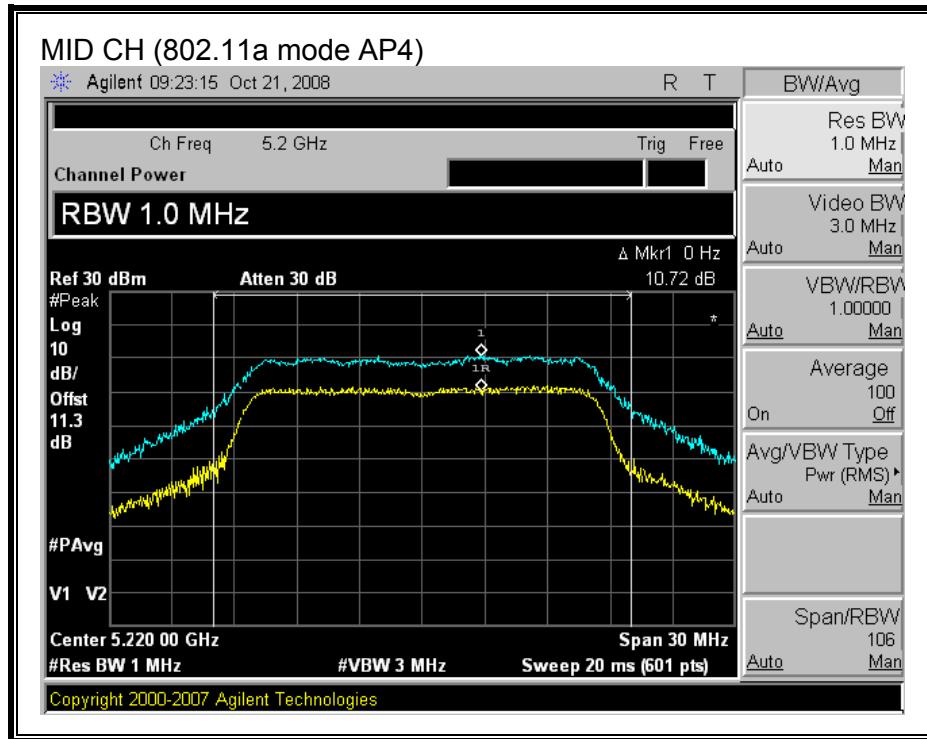


(802.11a MODE AP2)

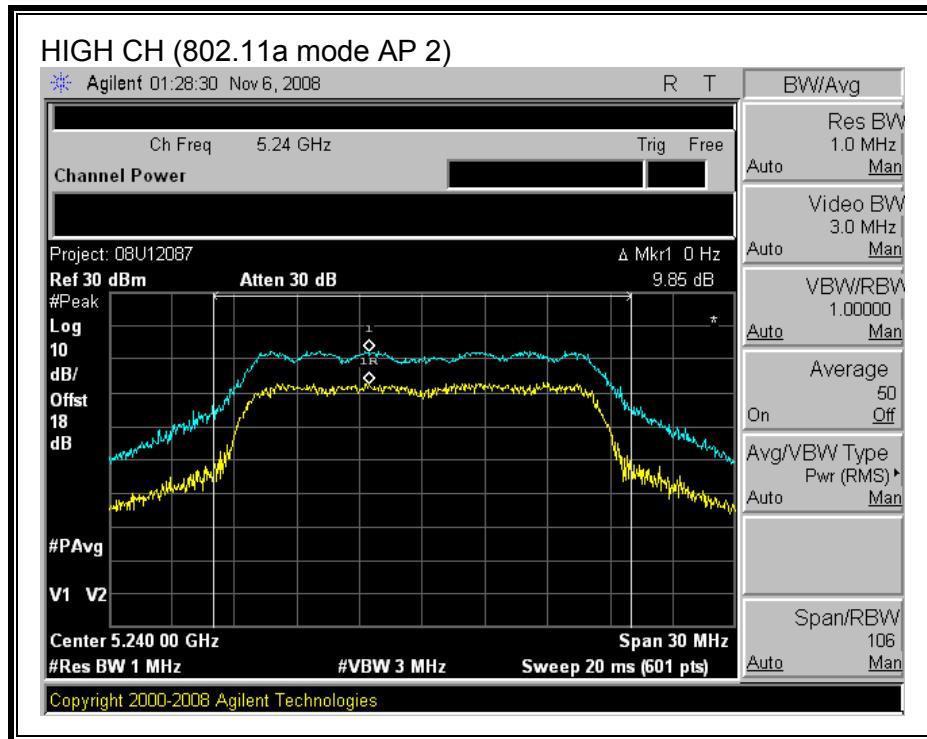


(802.11a MODE AP4)

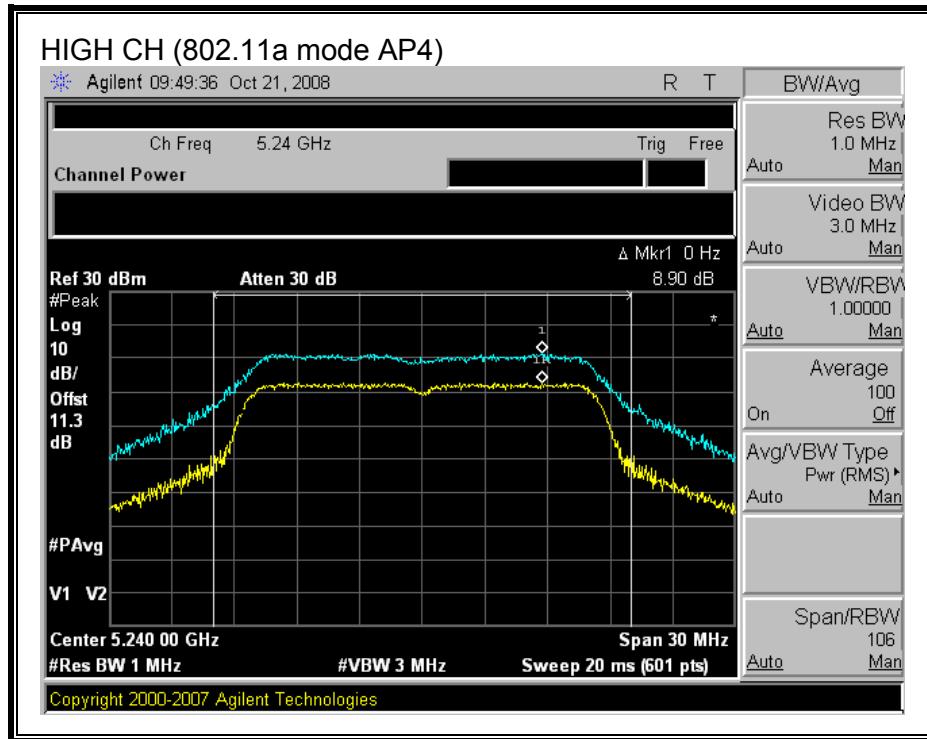


(802.11n HT20 MODE AP2)

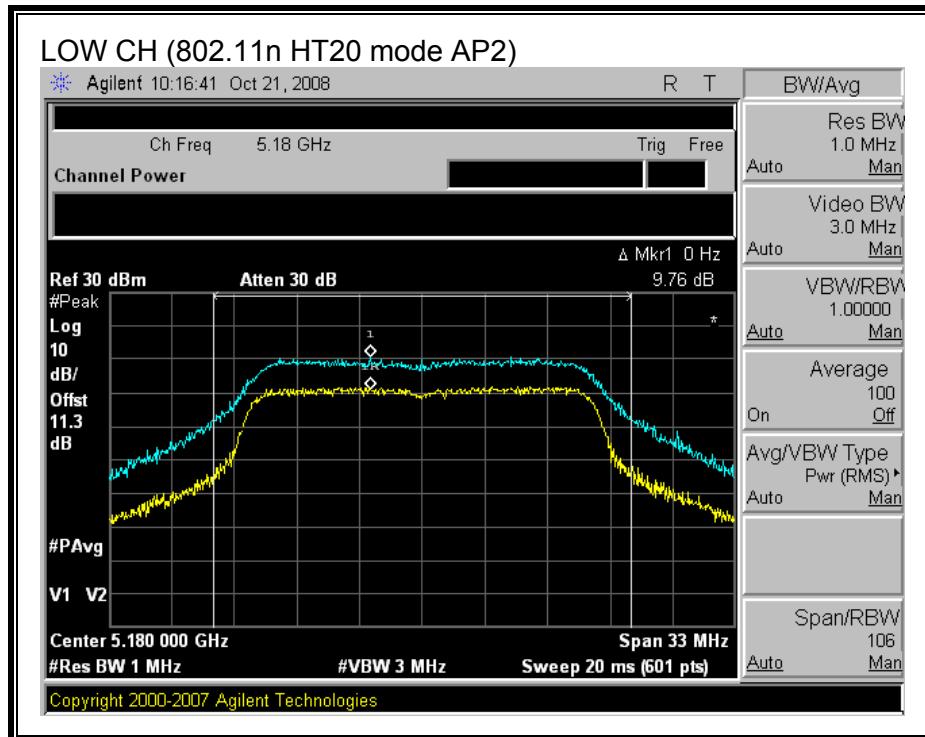


(802.11n HT20 MODE AP4)

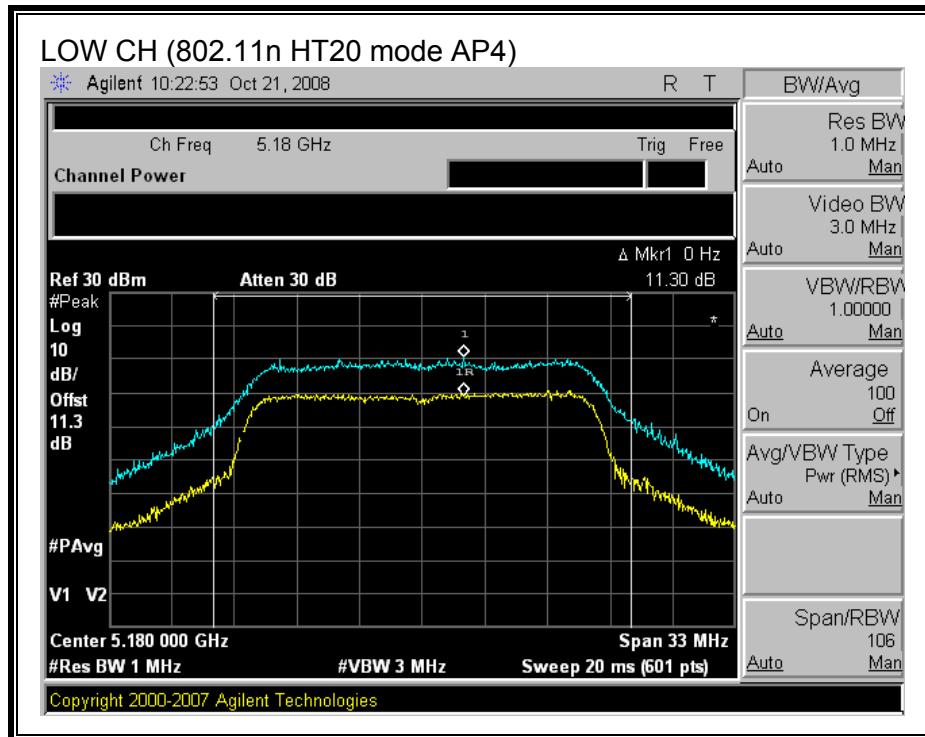


(802.11n HT20 MODE AP2)

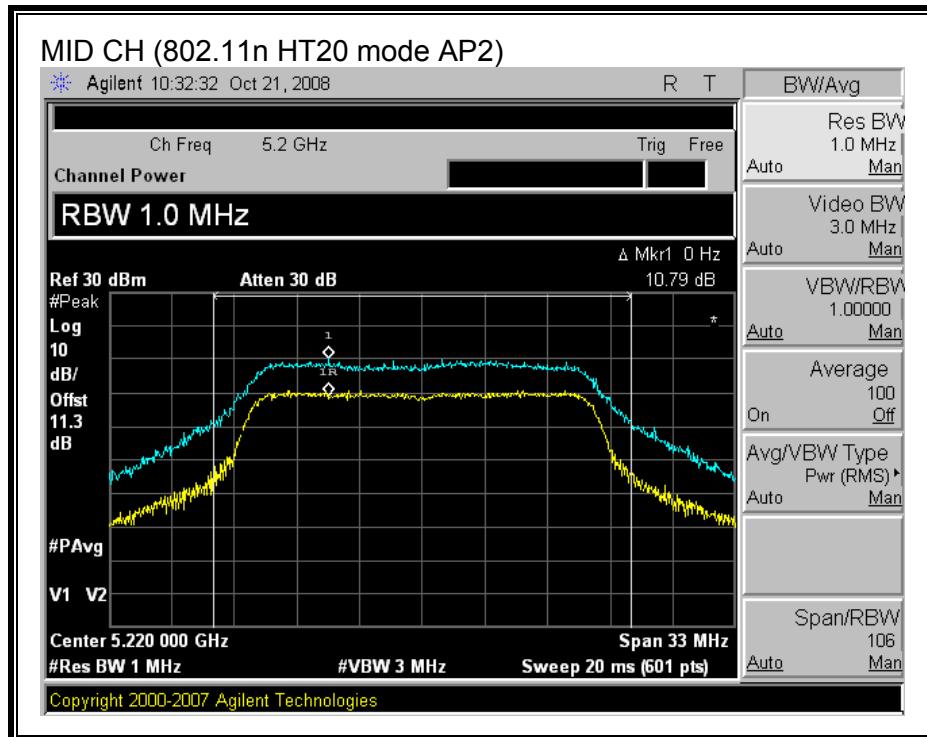


(802.11n HT20 MODE AP4)

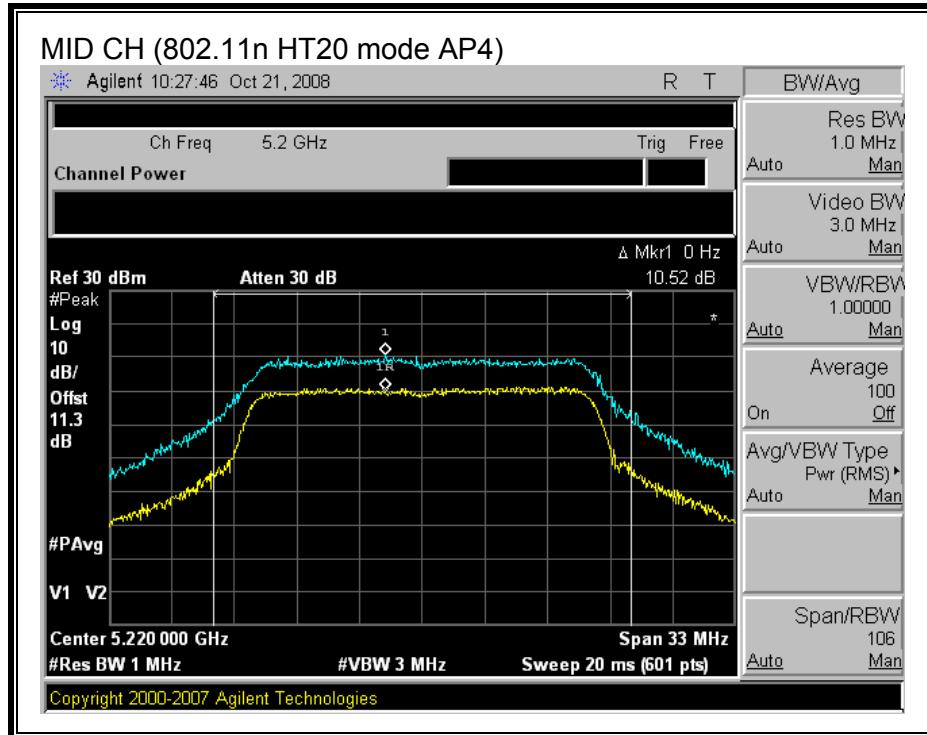


(802.11n HT20 MODE AP2)

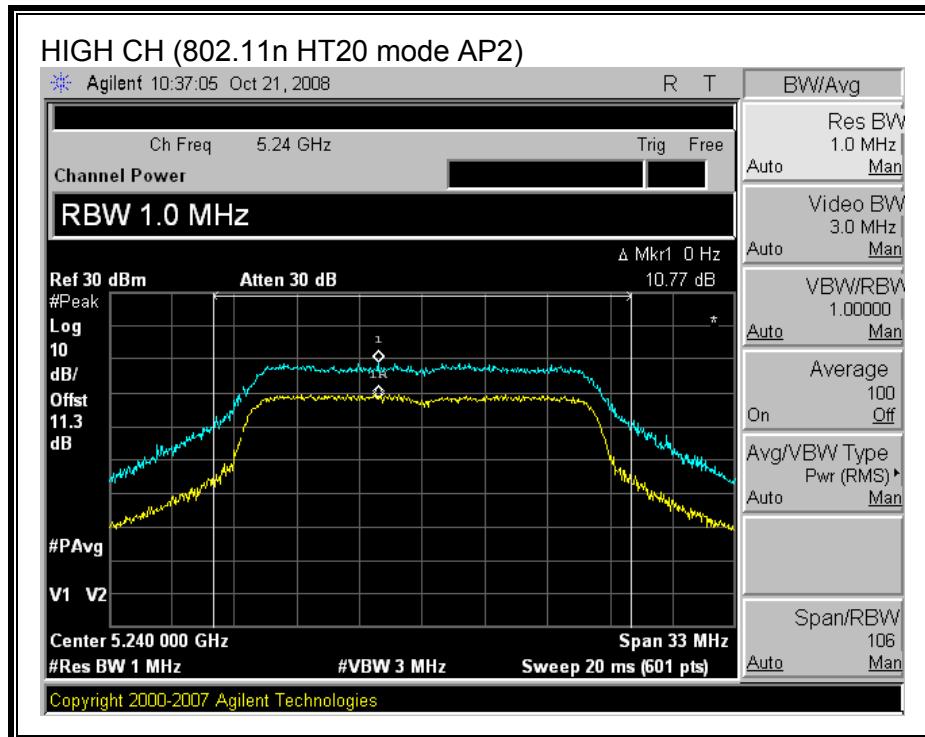


(802.11n HT20 MODE AP4)

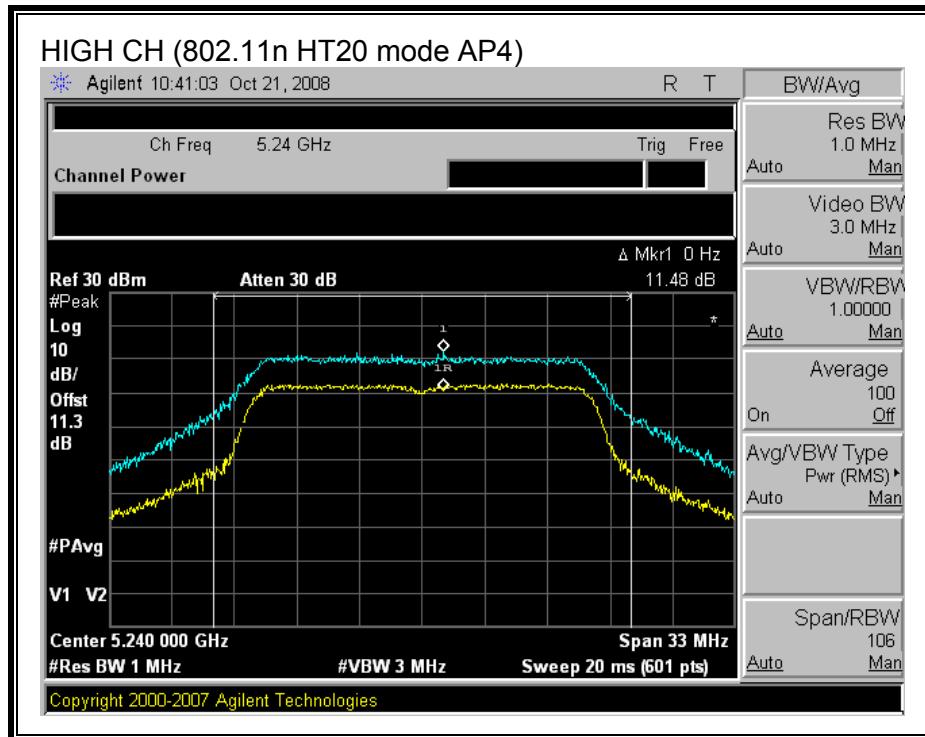


(802.11n HT40 MODE AP2)

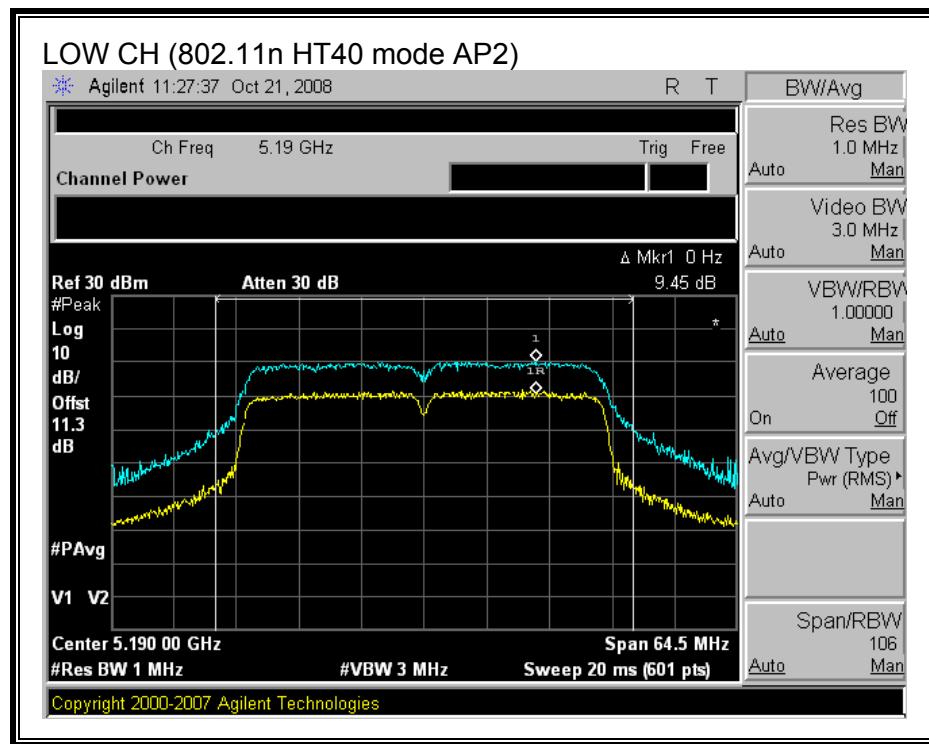


(802.11n HT40 MODE AP4)

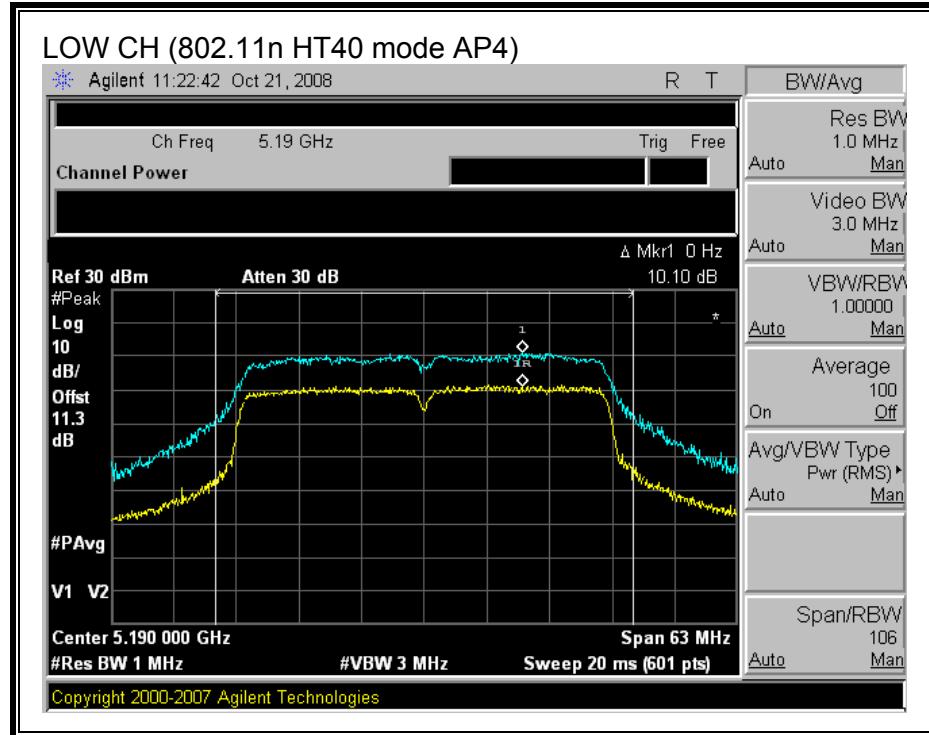

(802.11n HT40 MODE AP2)

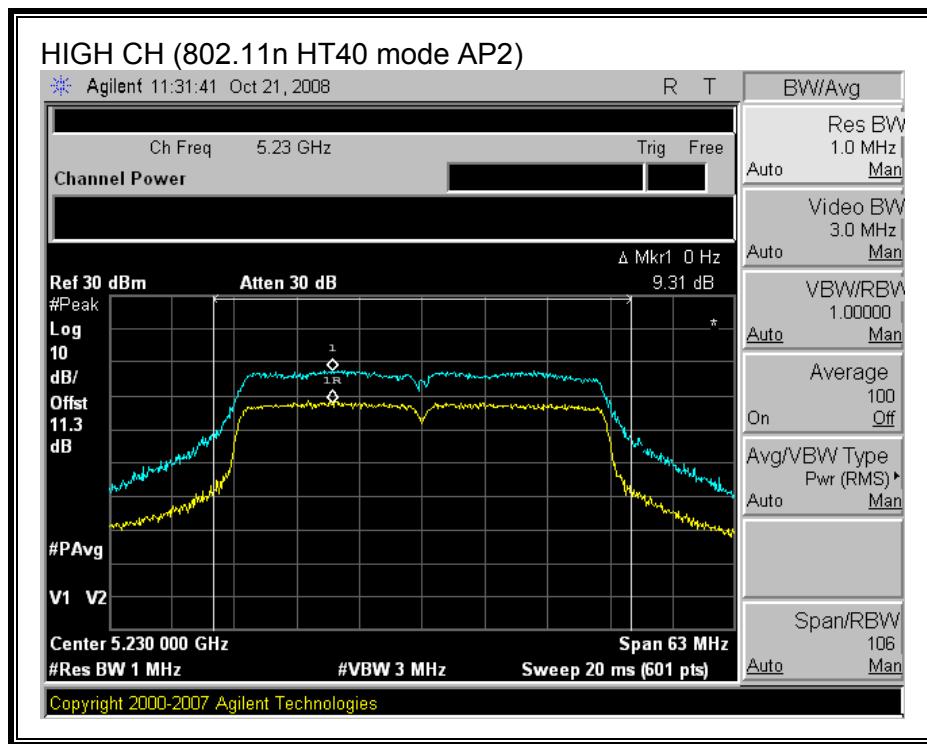

(802.11n HT40 MODE AP4)

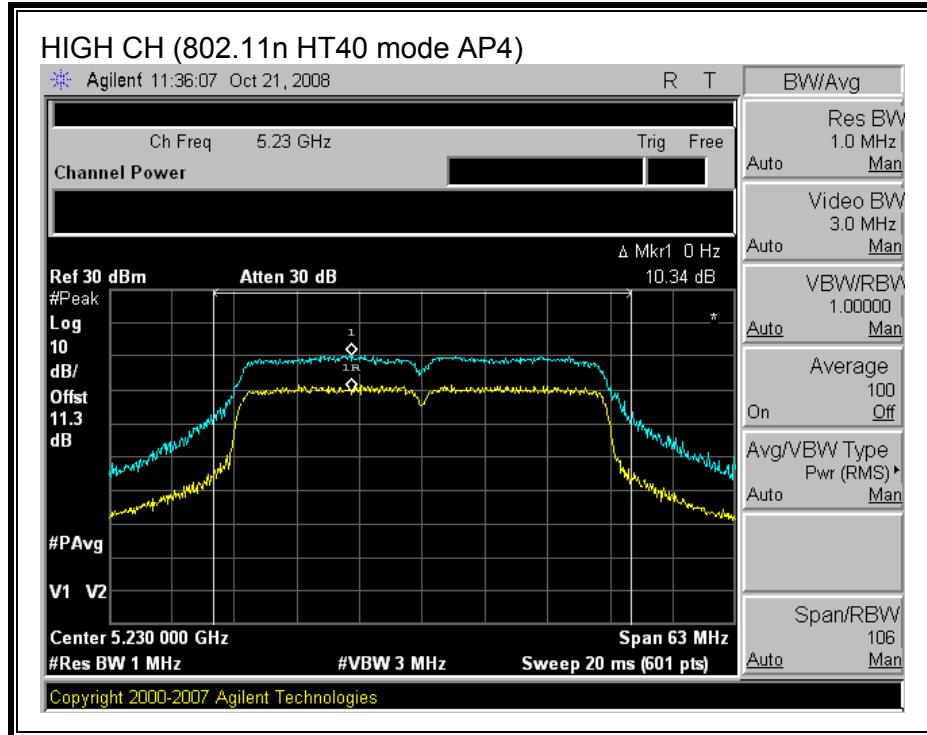

7.1.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (1)

IC RSS-210 A9.3 (1)

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.



Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.



Offset Value = Cable Loss + Attenuation + Antenna Gain + Combiner Loss

RESULTS



SPURIOUS EMISSIONS WITH COMBINER (802.11a MODE)

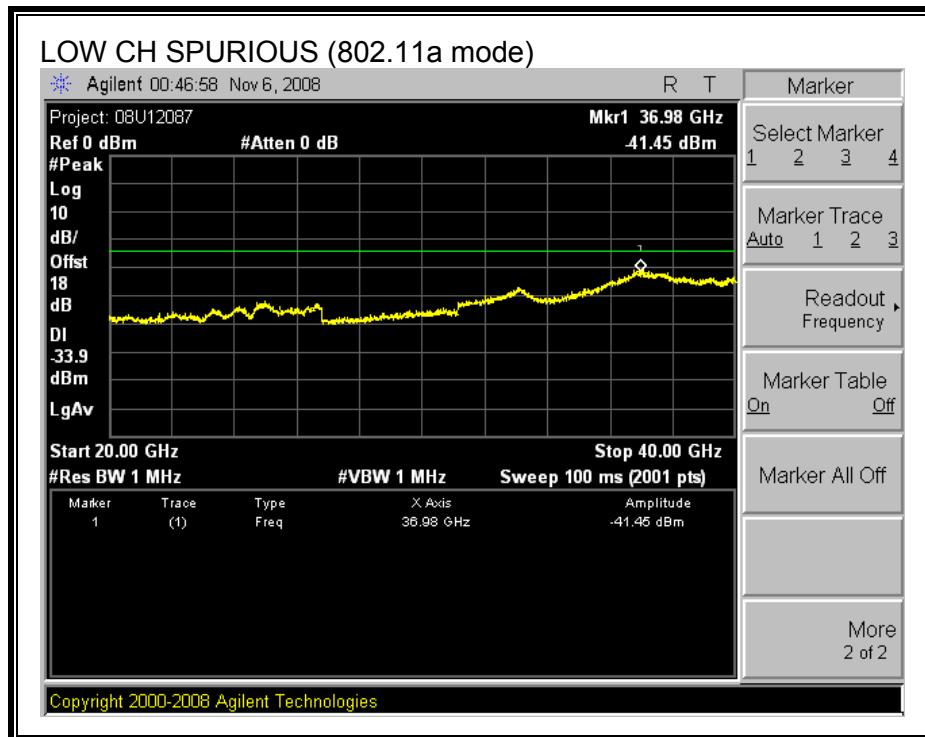
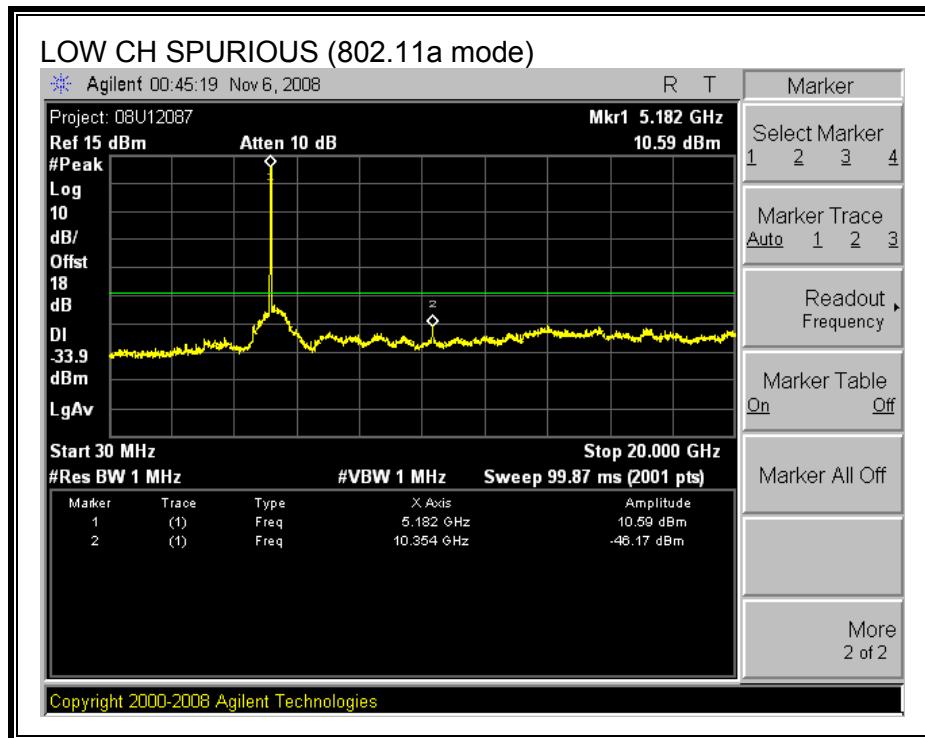


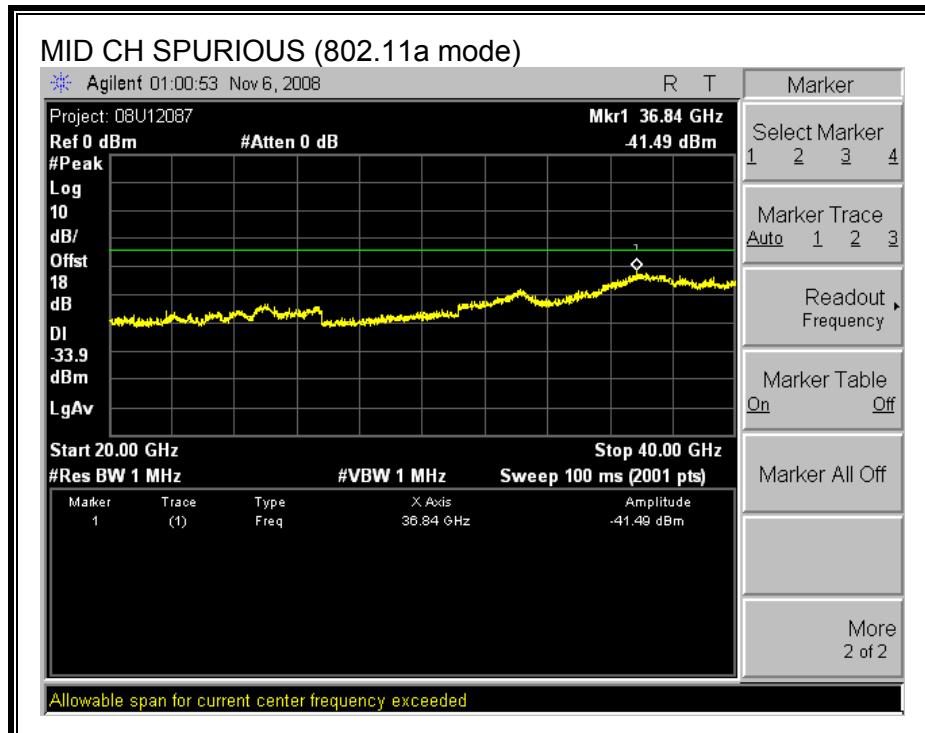
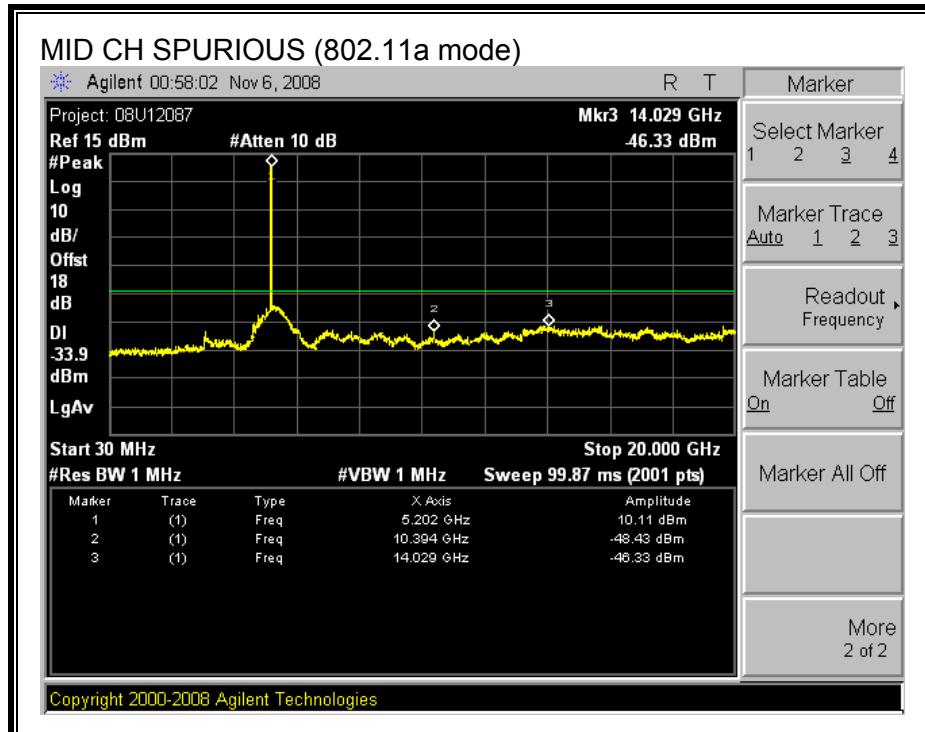


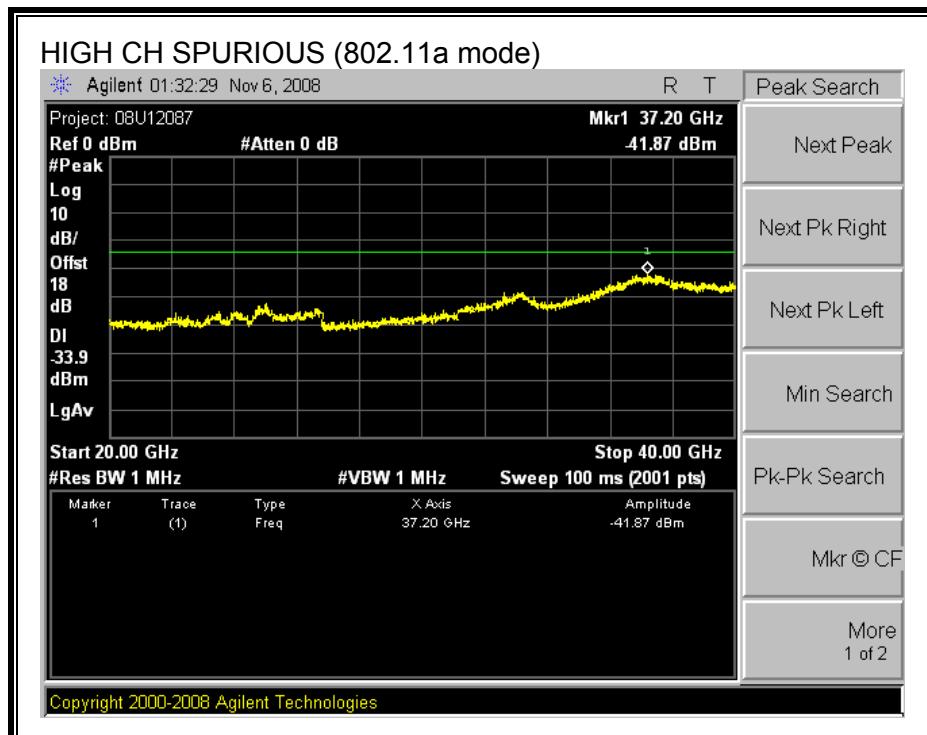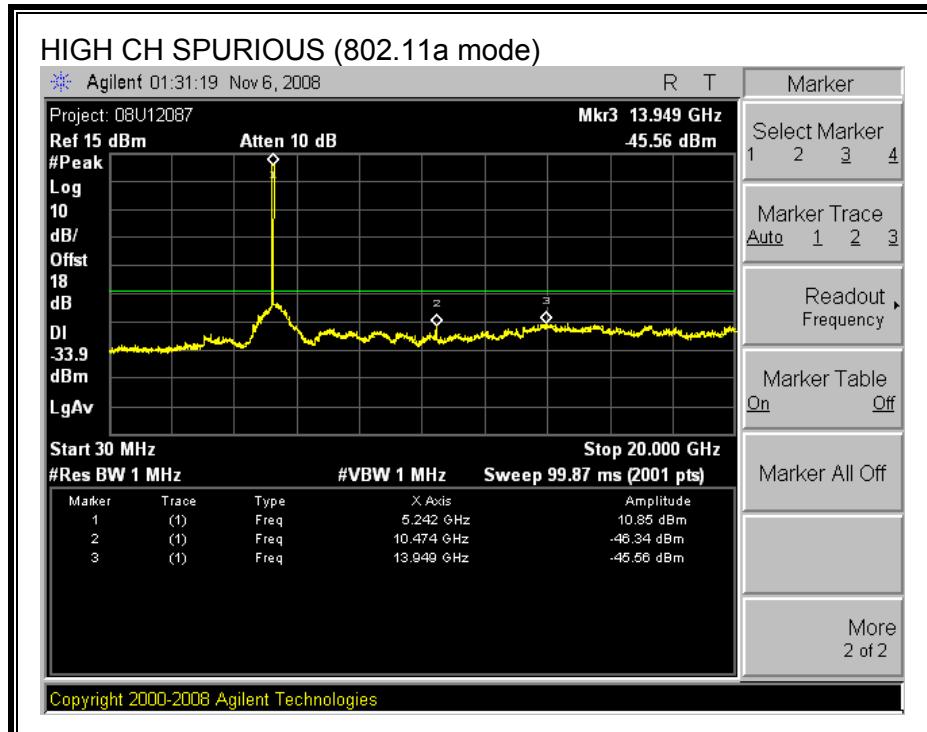



(802.11n HT20 MODE)

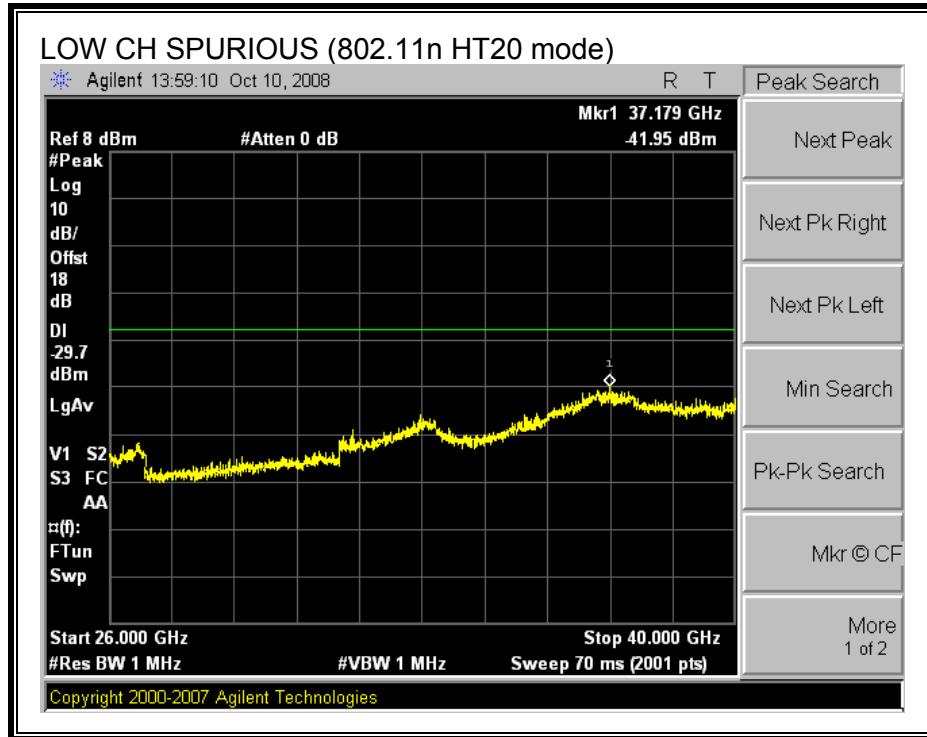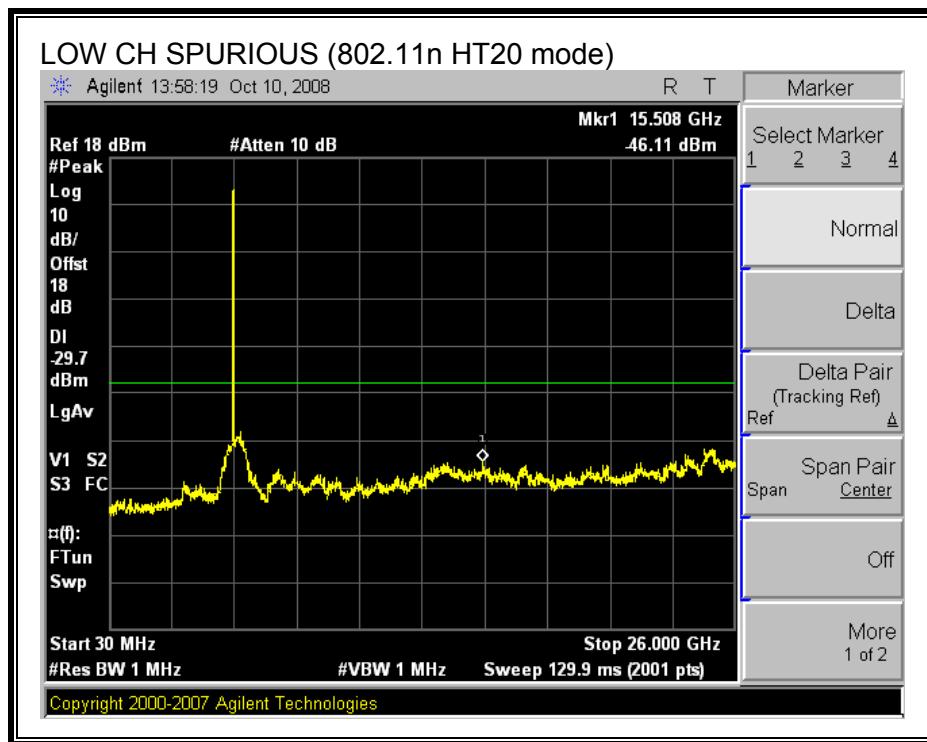

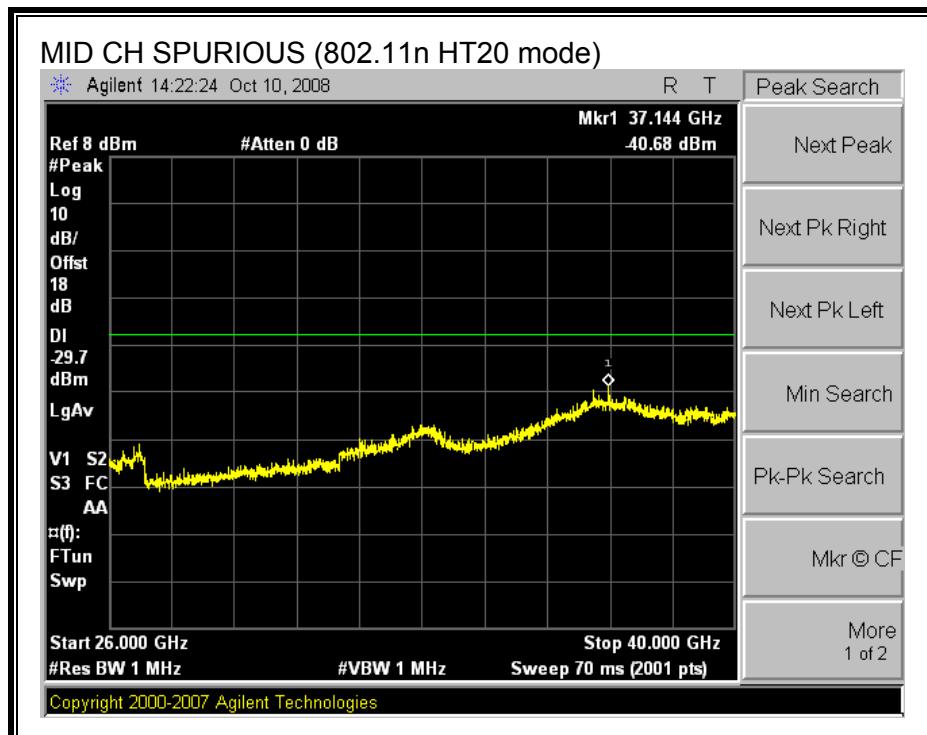
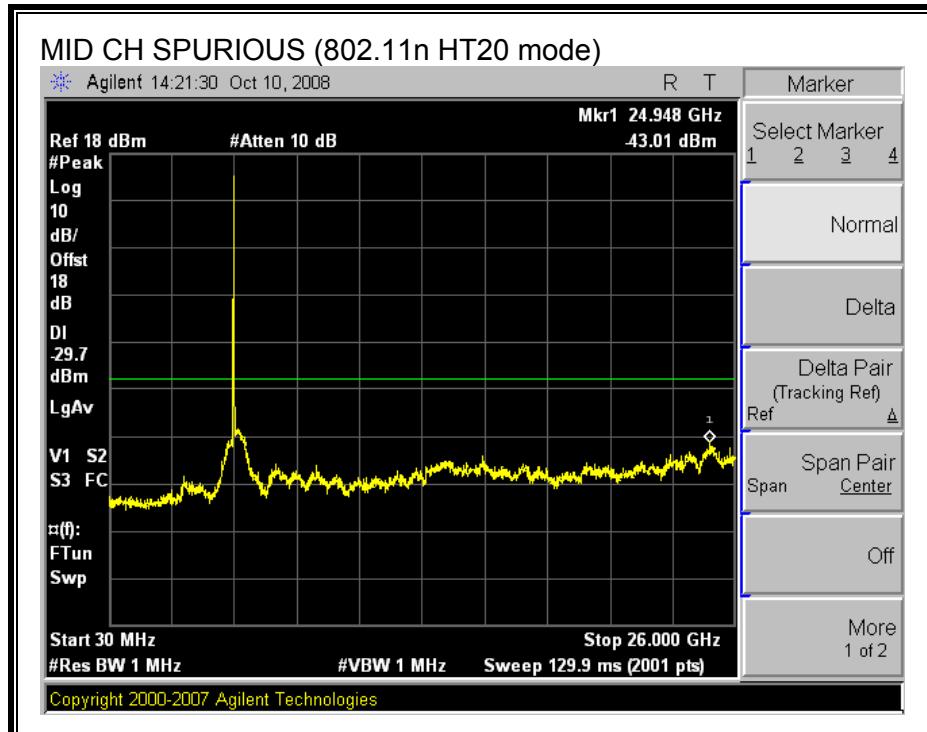


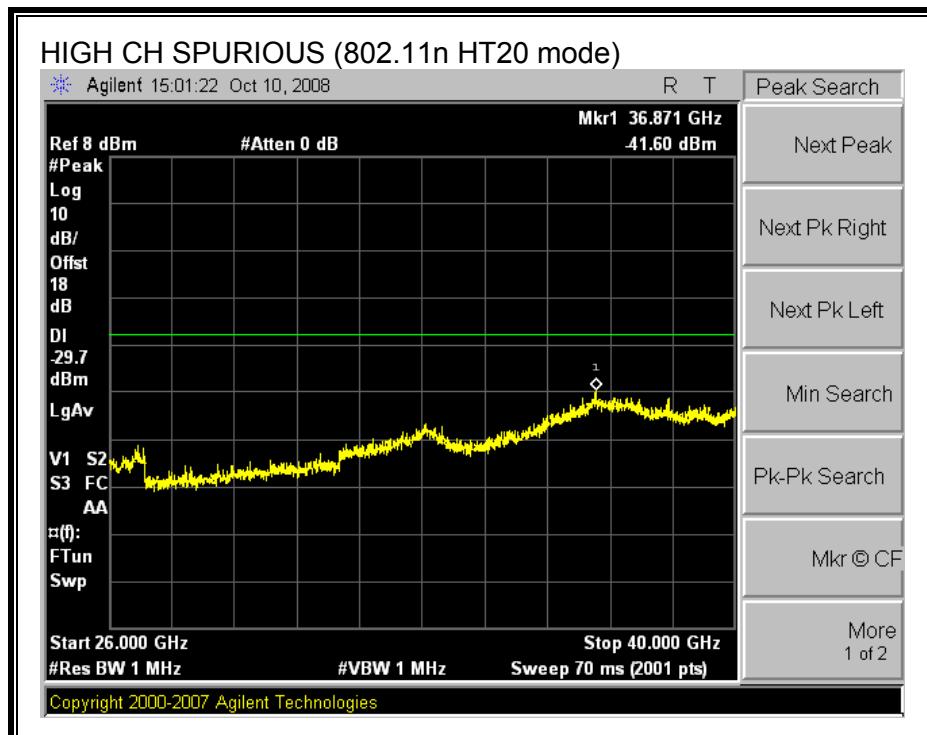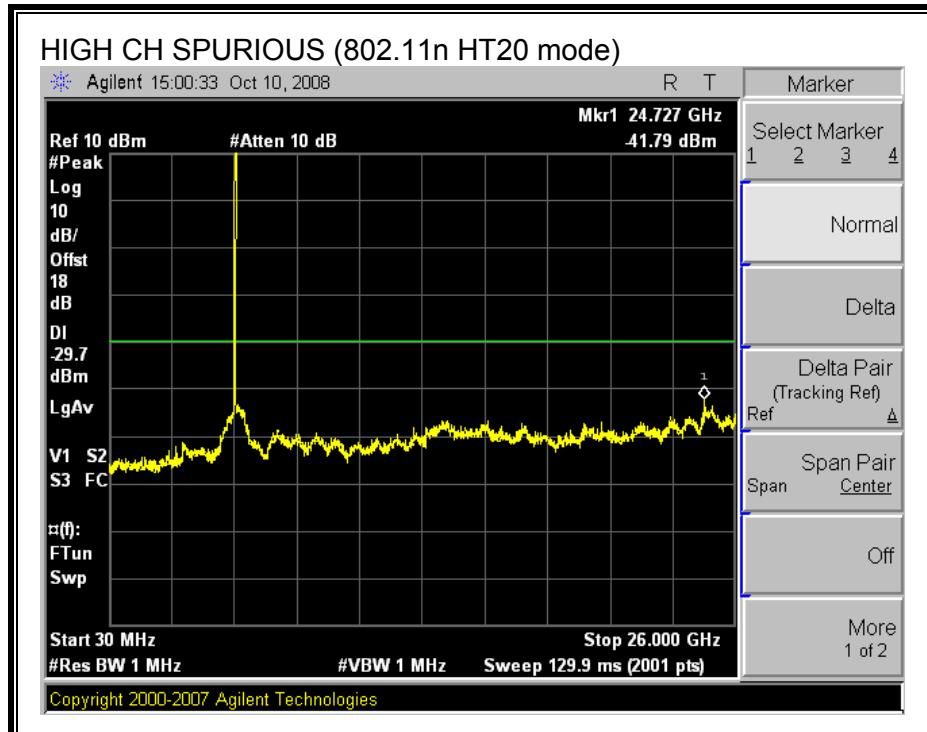

(802.11n HT40 MODE)

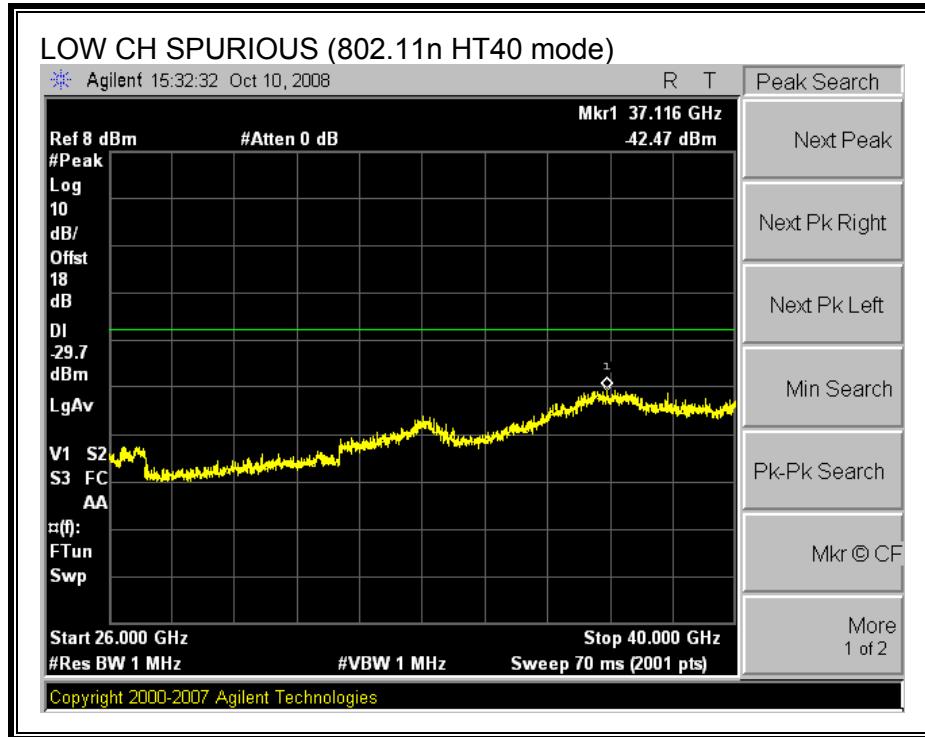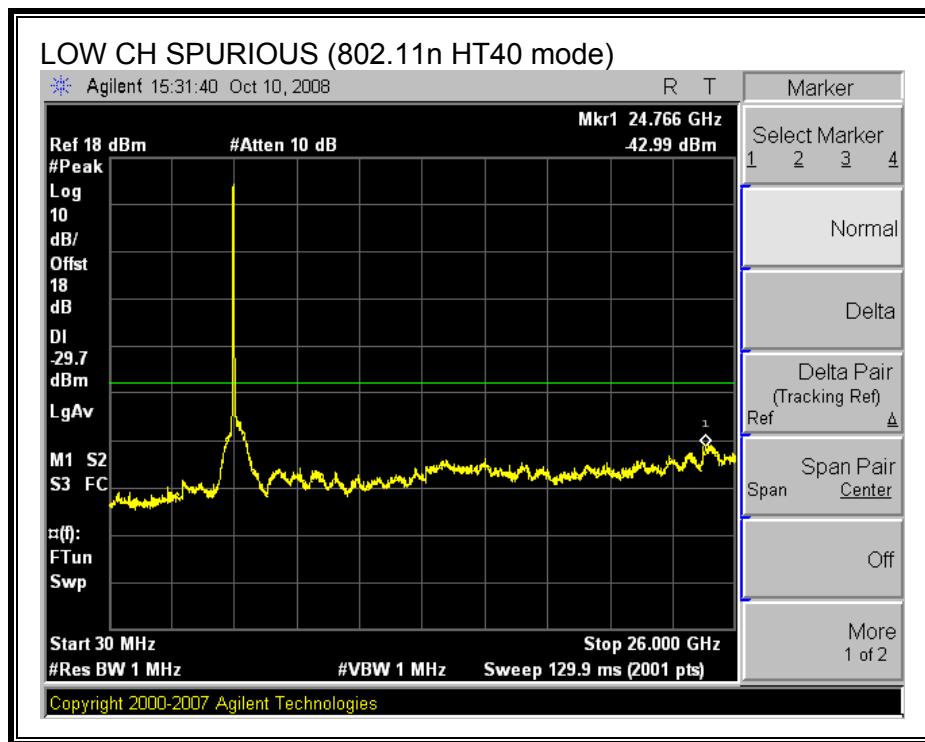

(802.11n HT40 MODE)

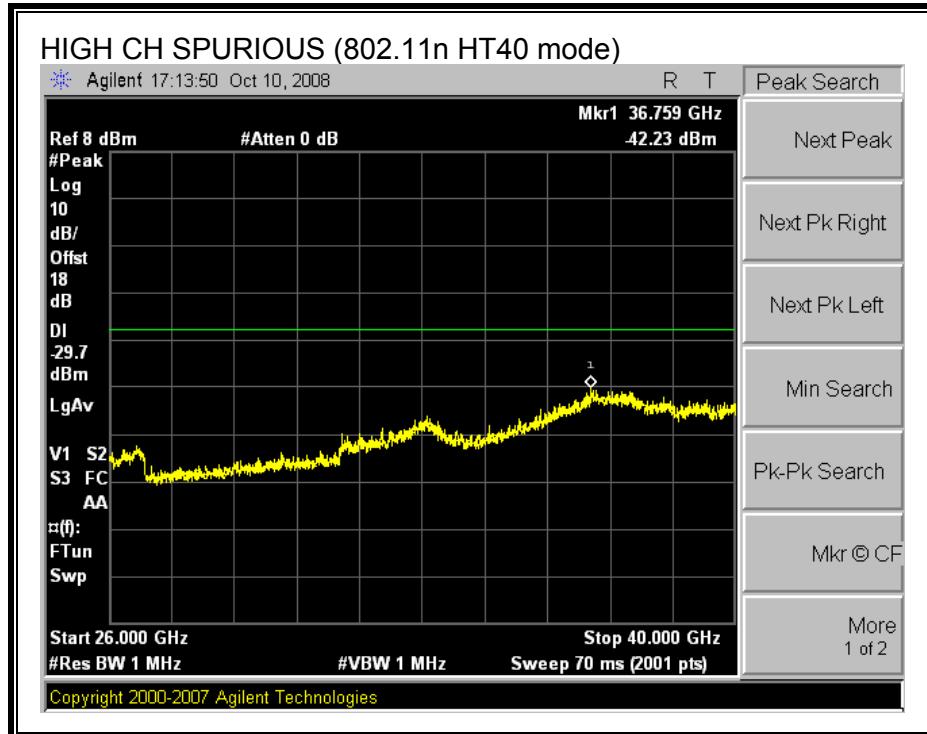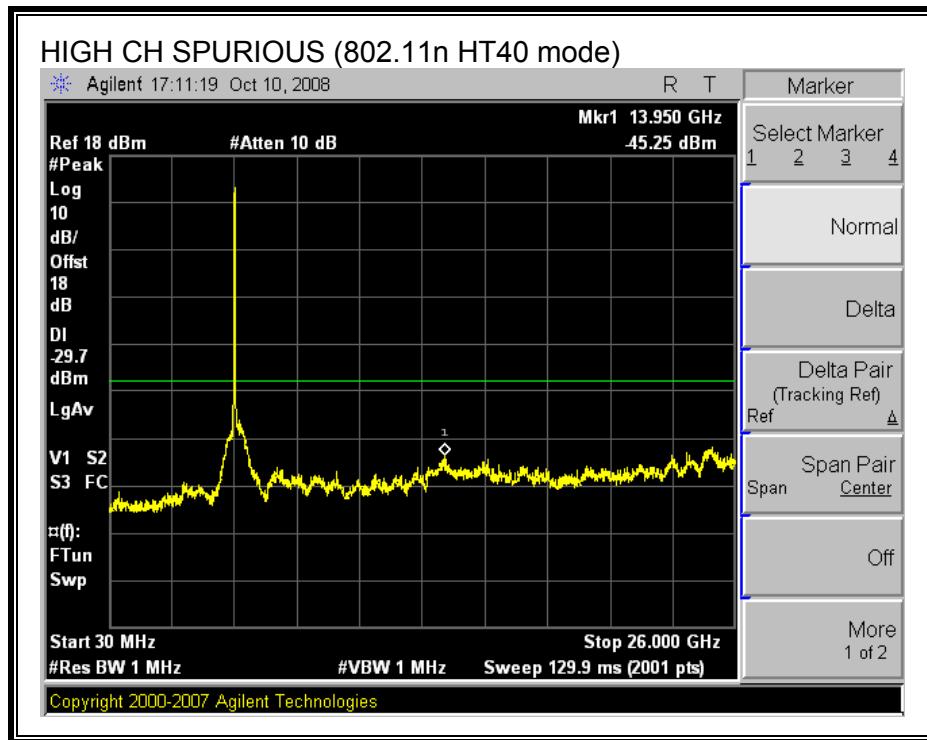

8. RADIATED TEST RESULTS

8.1 LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5.2 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.1. TRANSMITTER ABOVE 1 GHz IN THE 5.2 GHz BAND

8.1.1. 802.11a MODE IN THE 5.2 GHz BAND



RESTRICTED BANDEdge (LOW CHANNEL, HORIZONTAL)

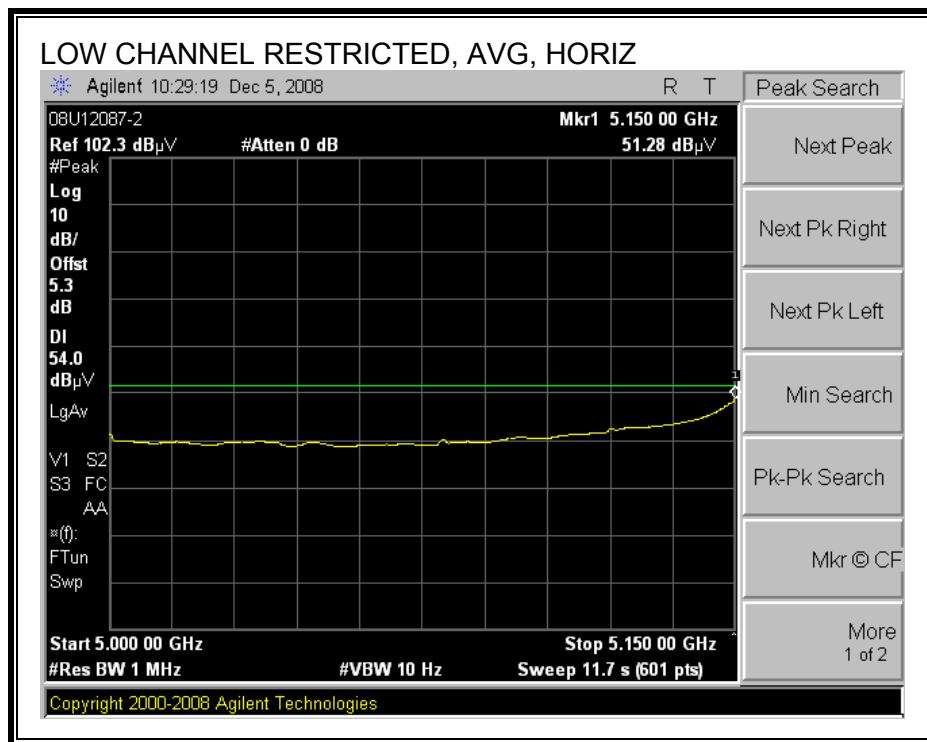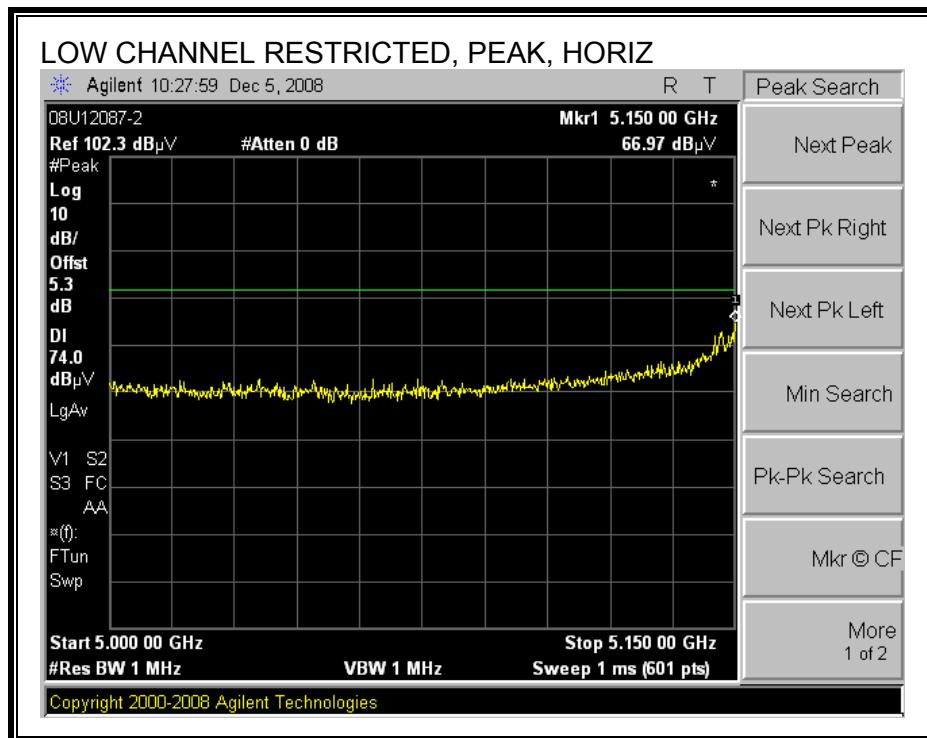



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

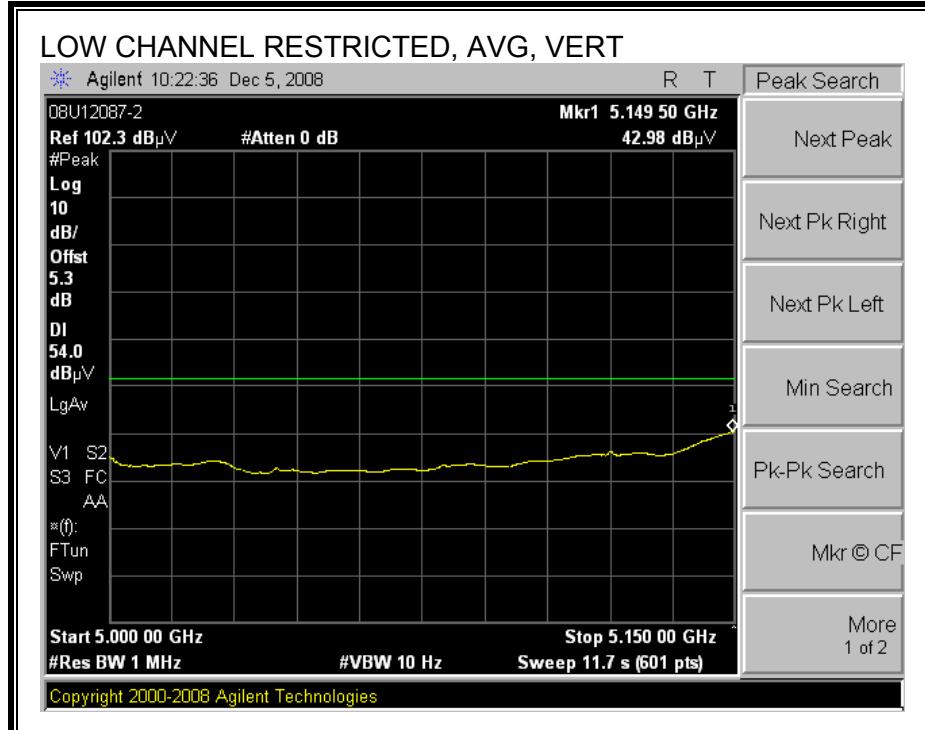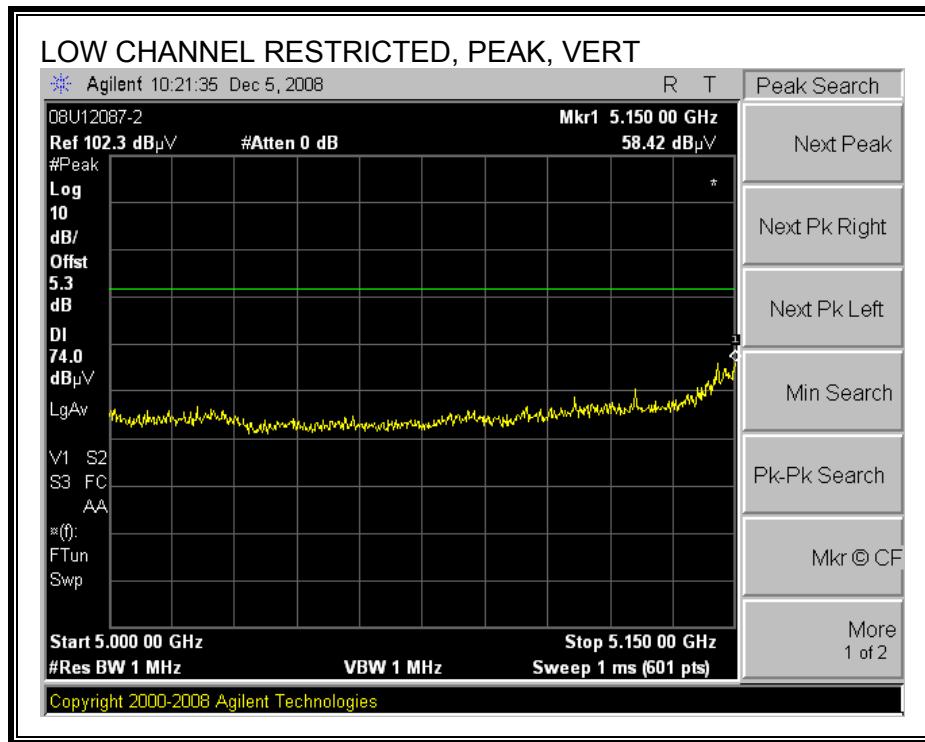

AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

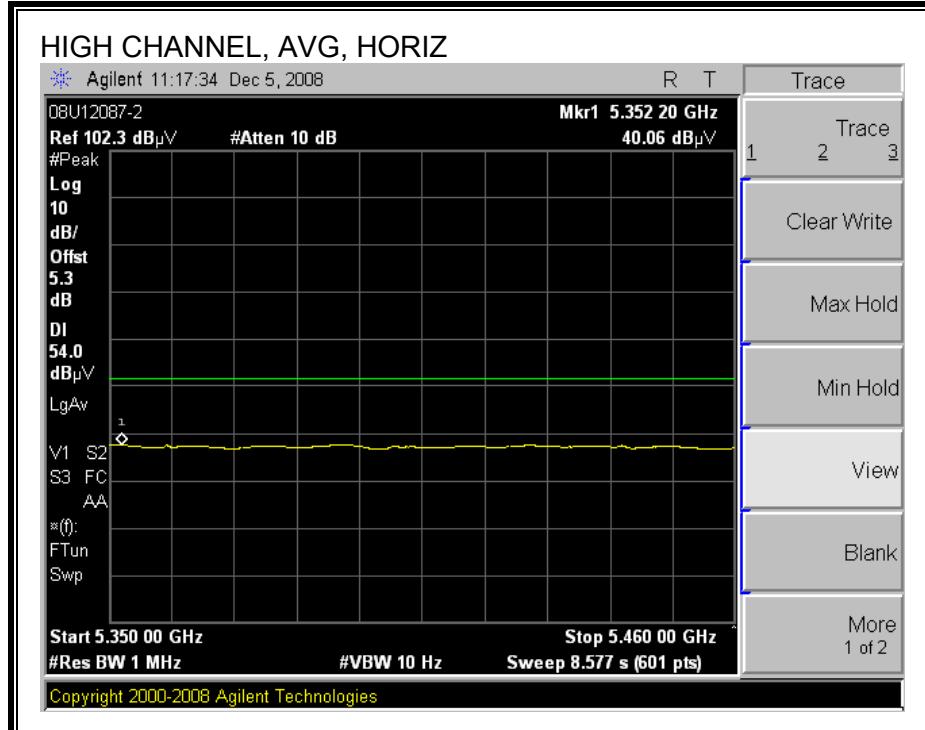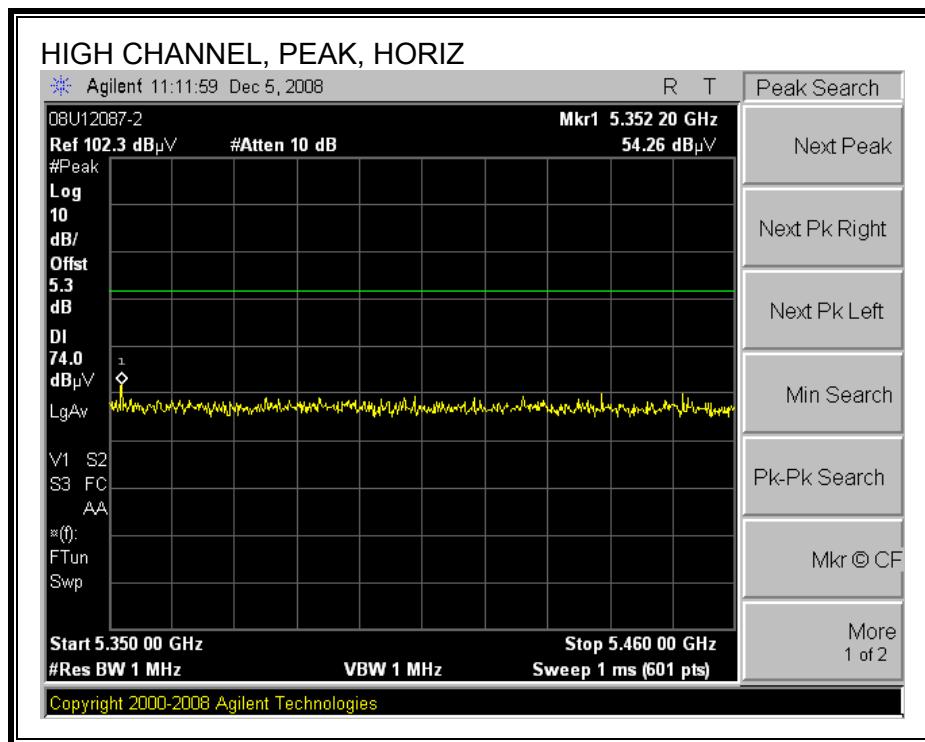

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

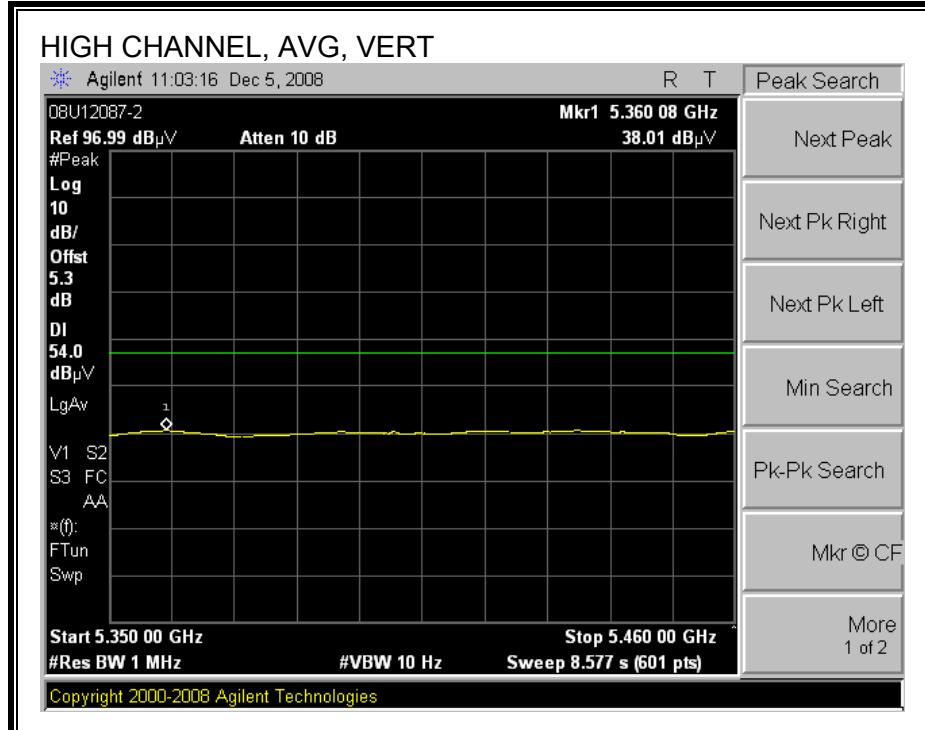
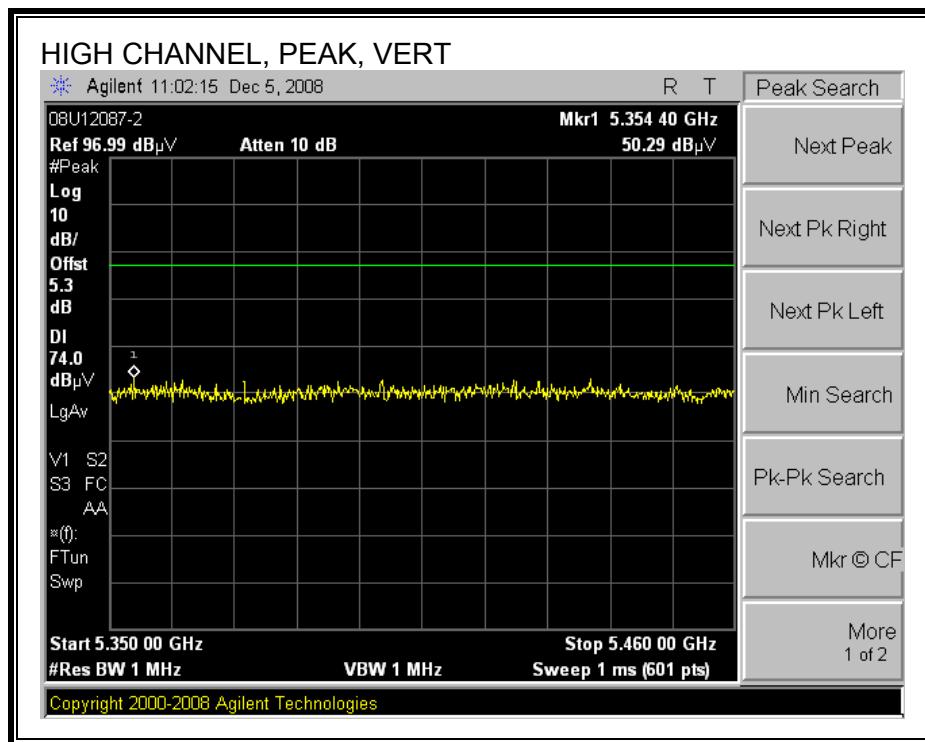


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company: Apple Inc.	Project #: 08U12087-2	Date: 12/05/08	Test Engineer: Thanh Nguyen	Configuration: EUT and remote support Laptop	Mode: Transmit 802.11a										
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T119; S/N: 29301 @3m			T34 HP 8449B			T88 Miteq 26-40GHz			T125; ARA 18-26GHz; S/N:1007			FCC 15.205			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_002			Average Measurements RBW=1MHz, VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 5180MHz															
15.540	3.0	36.1	22.5	35.5	11.3	-32.2	0.0	0.0	50.8	37.1	74	54	-23.2	-16.9	V
15.540	3.0	36.5	23.4	35.5	11.3	-32.2	0.0	0.0	51.1	38.0	74	54	-22.9	-16.0	H
Mid Ch 5200MHz															
15.600	3.0	34.7	22.4	35.8	11.4	-32.2	0.0	0.0	49.6	37.3	74	54	-24.4	-16.7	H
15.600	3.0	34.2	22.5	35.8	11.4	-32.2	0.0	0.0	49.2	37.5	74	54	-24.8	-16.5	V
High Ch 5240MHz															
15.720	3.0	34.4	22.3	36.3	11.4	-32.2	0.0	0.0	50.0	37.8	74	54	-24.0	-16.2	V
15.720	3.0	35.5	22.6	36.3	11.4	-32.2	0.0	0.0	51.0	38.2	74	54	-23.0	-15.8	H
No other emissions were detected above 3rd harmonic.															
Rev. 10.15.08															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										

8.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

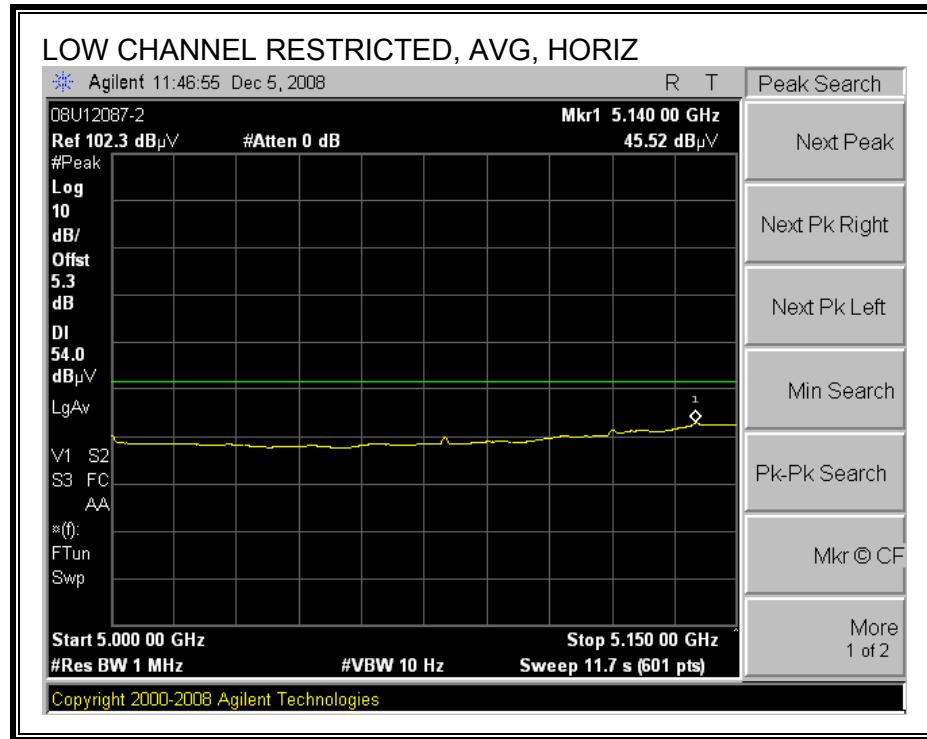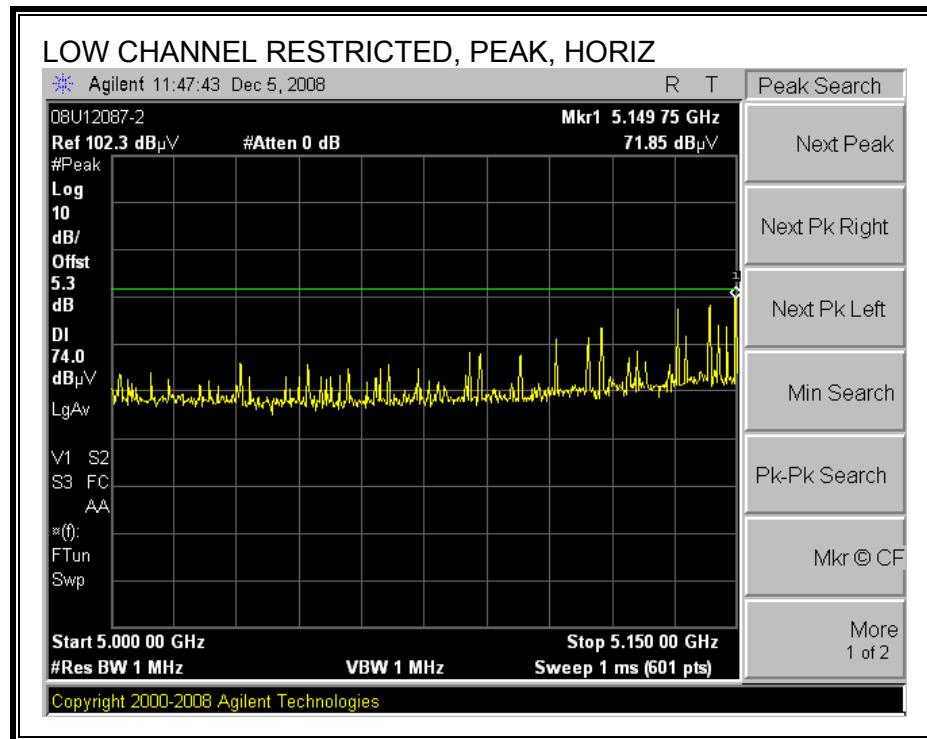



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

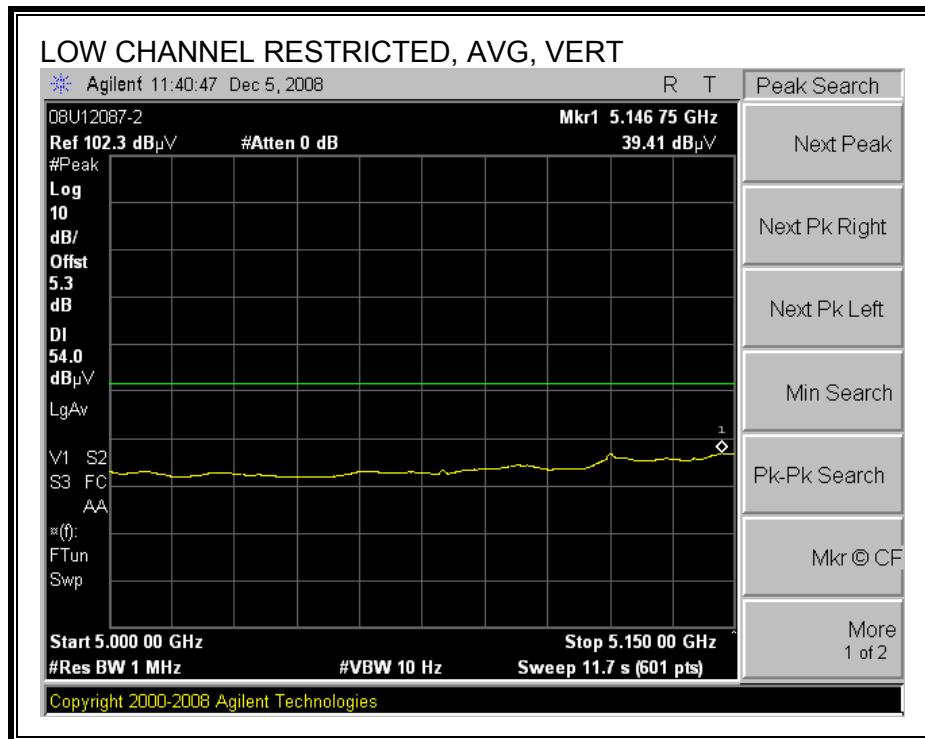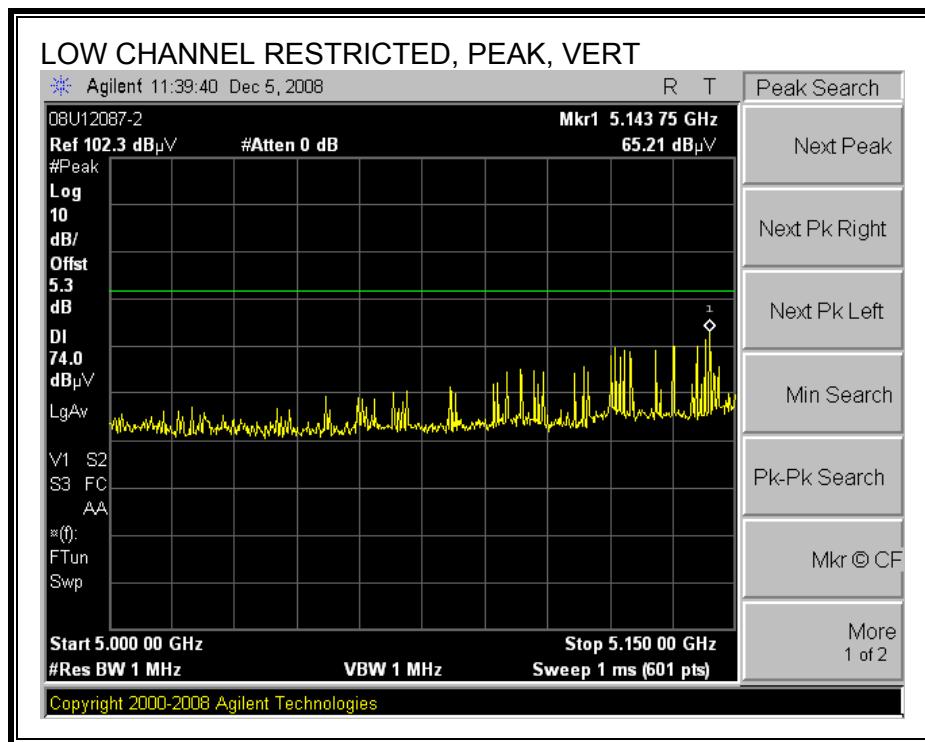

AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

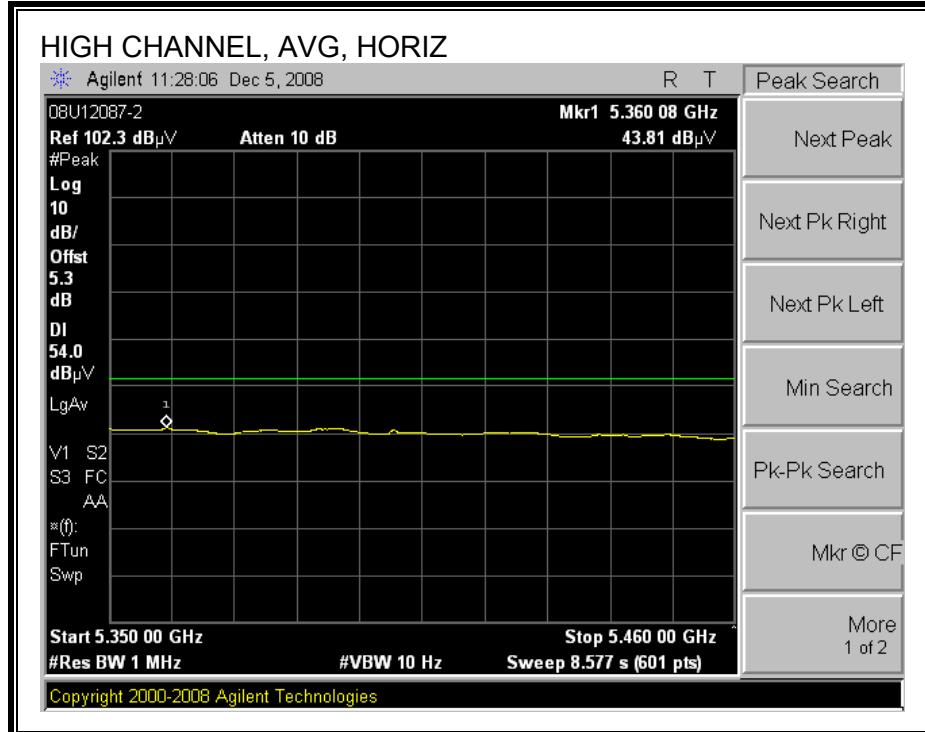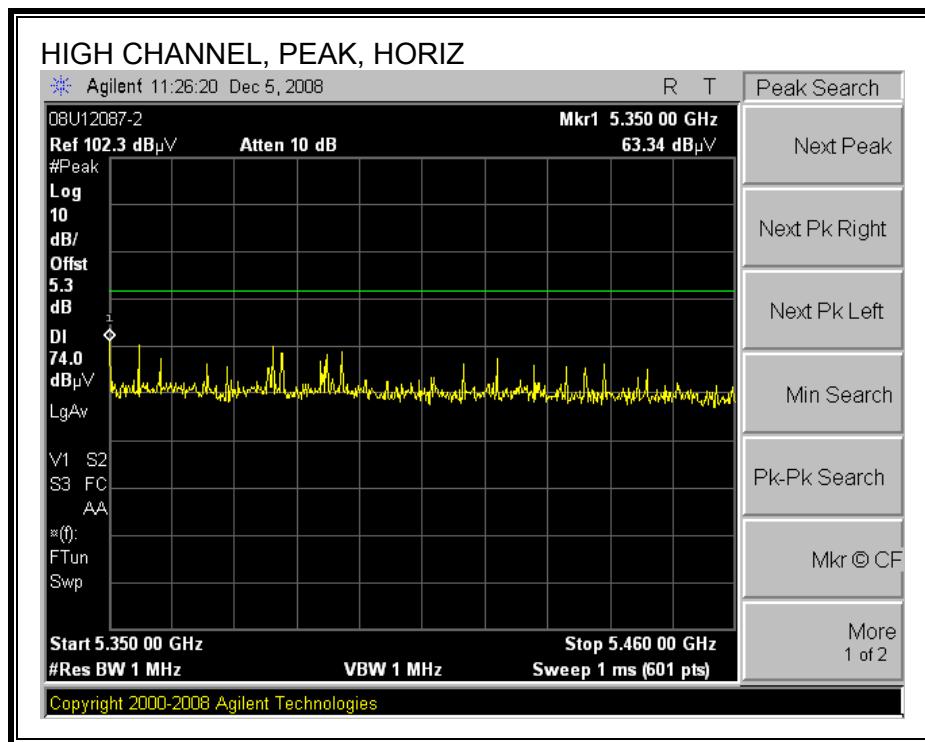

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

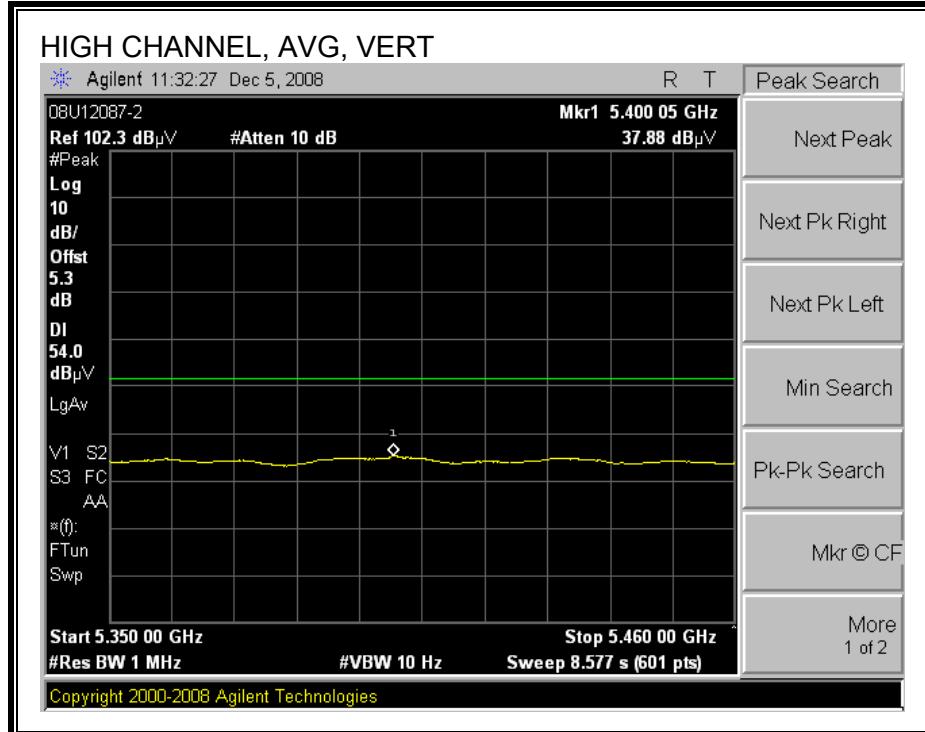
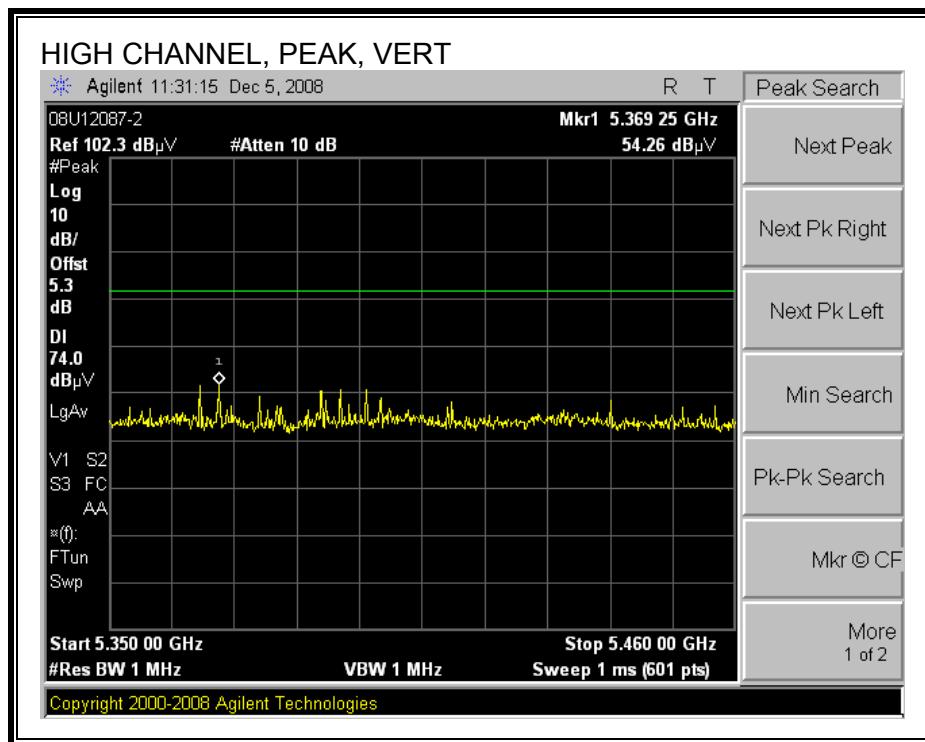


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company: Apple Inc.	Project #: 08U12087-2	Date: 12/05/08	Test Engineer: Thanh Nguyen	Configuration: EUT and remote support Laptop	Mode: Transmit HT 20 Mhz										
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T119; S/N: 29301 @3m			T34 HP 8449B			T88 Miteq 26-40GHz			T125; ARA 18-26GHz; S/N:1007			FCC 15.205			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_002			Average Measurements RBW=1MHz, VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 5180MHz															
15.540	3.0	35.7	22.3	35.5	11.3	-32.2	0.0	0.0	50.3	36.9	74	54	-23.7	-17.1	V
15.540	3.0	36.9	23.1	35.5	11.3	-32.2	0.0	0.0	51.5	37.7	74	54	-22.5	-16.3	H
Mid Ch 5200MHz															
15.600	3.0	34.8	22.3	35.8	11.4	-32.2	0.0	0.0	49.7	37.3	74	54	-24.3	-16.7	H
15.600	3.0	34.7	22.1	35.8	11.4	-32.2	0.0	0.0	49.6	37.0	74	54	-24.4	-17.0	V
High Ch 5240MHz															
15.720	3.0	34.2	22.2	36.3	11.4	-32.2	0.0	0.0	49.8	37.7	74	54	-24.2	-16.3	V
15.720	3.0	35.6	22.8	36.3	11.4	-32.2	0.0	0.0	51.1	38.4	74	54	-22.9	-15.6	H
No other emissions were detected above 3rd harmonic.															
Rev. 10.15.08															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										

8.1.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

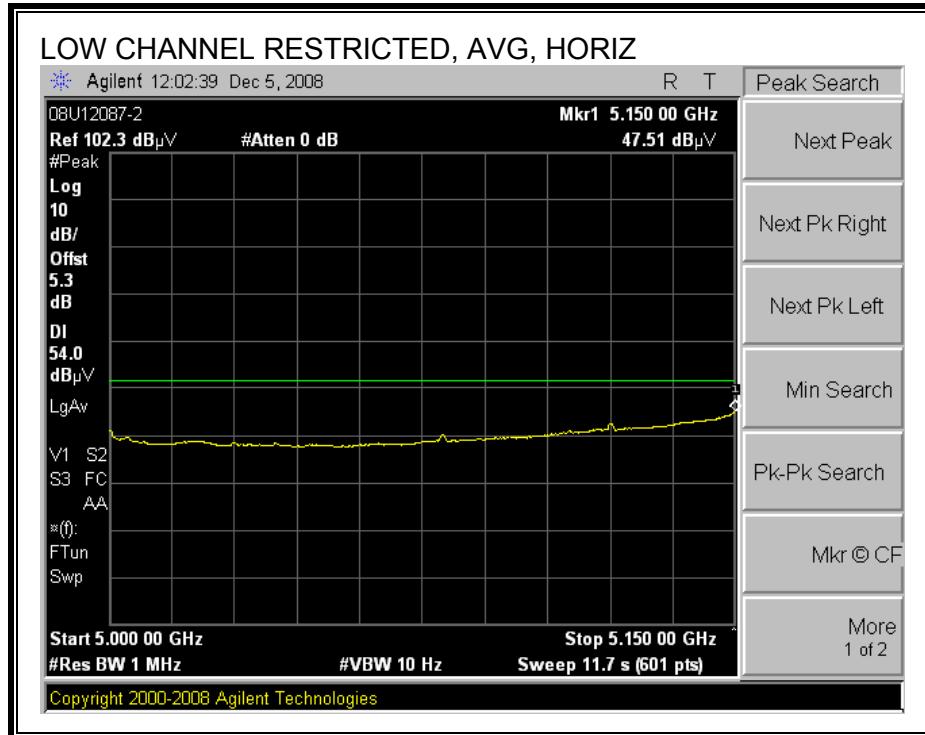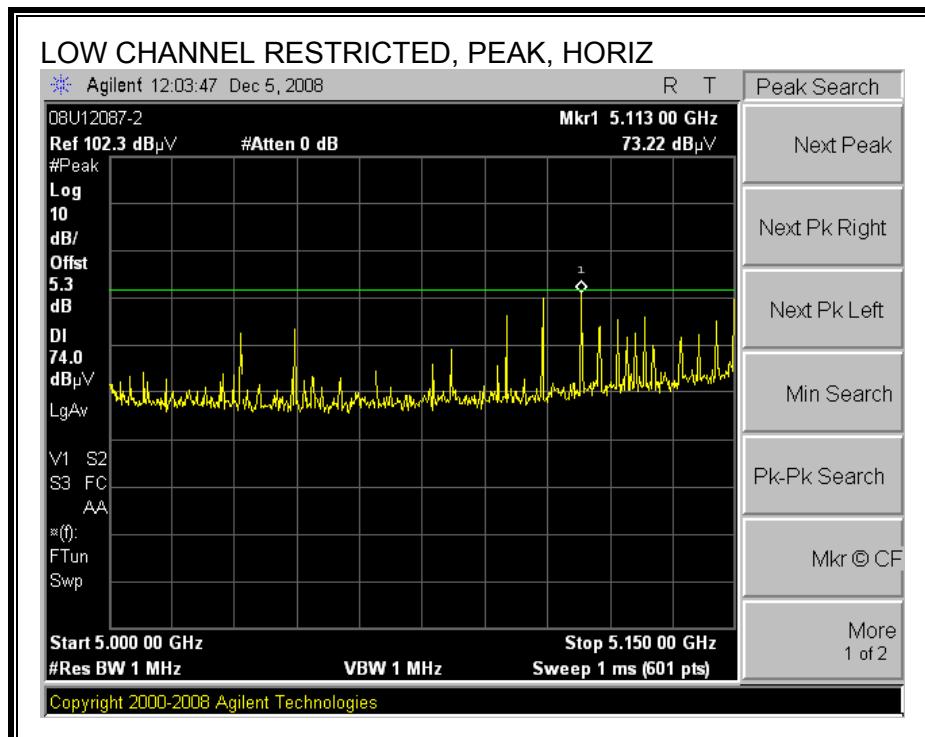



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

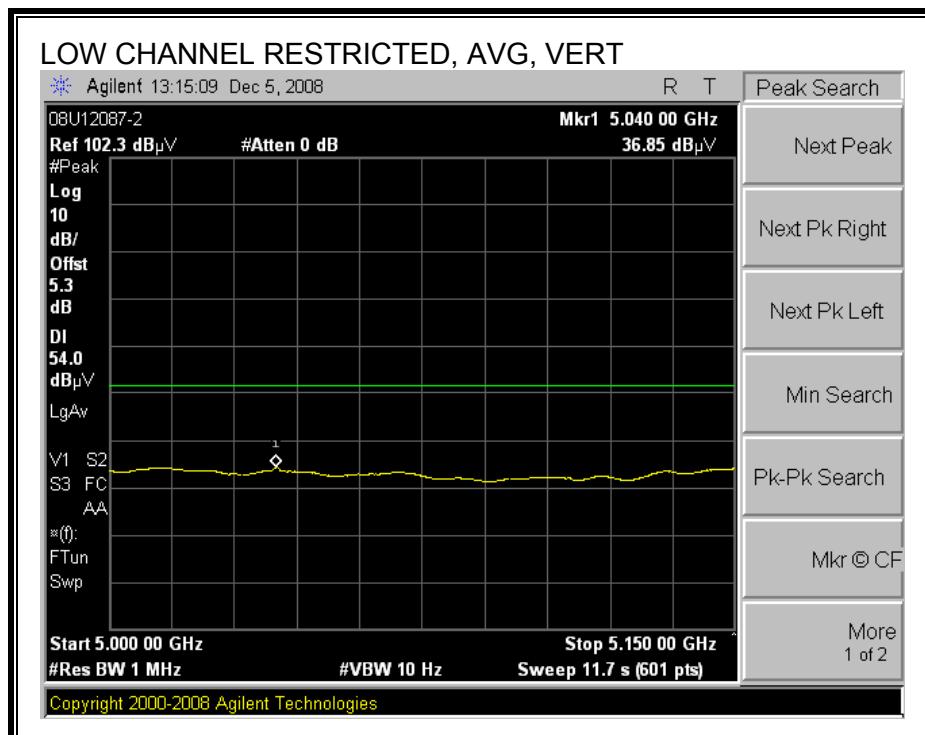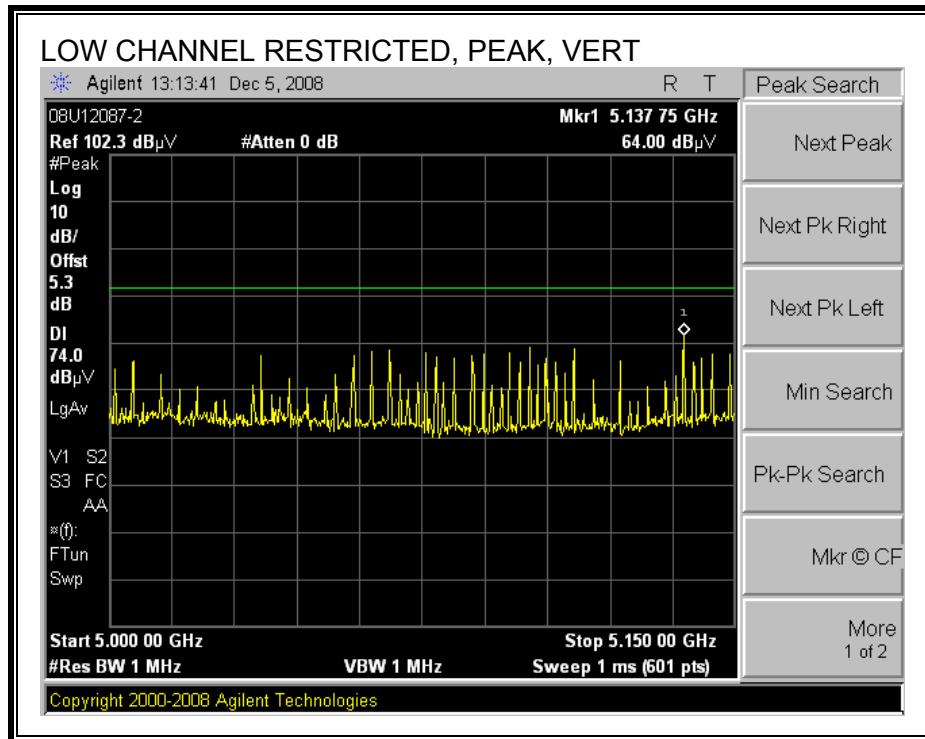

AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

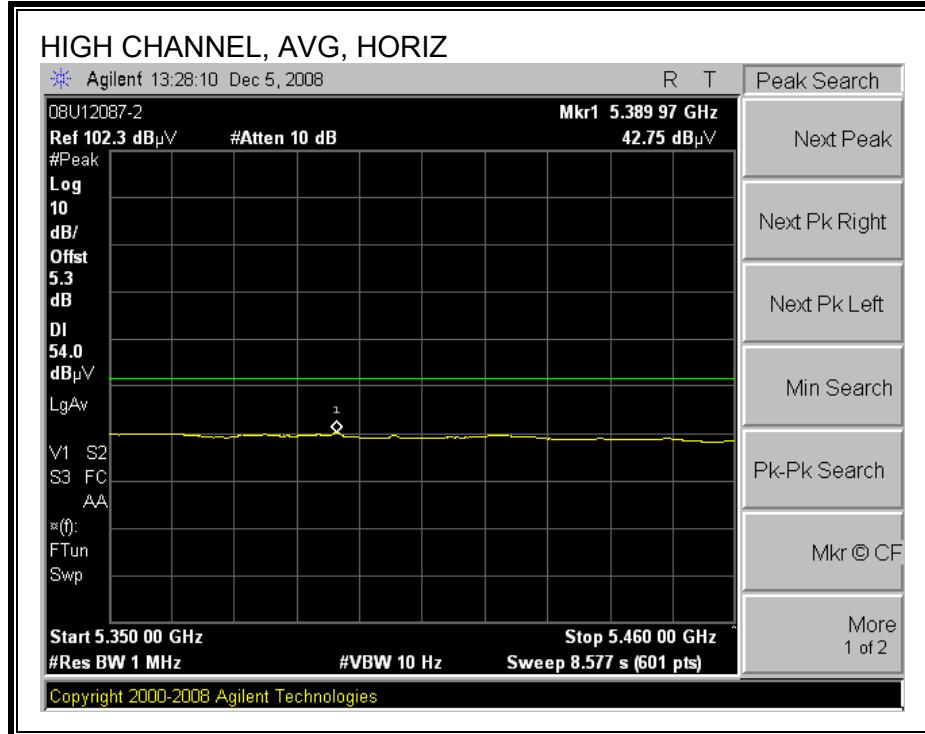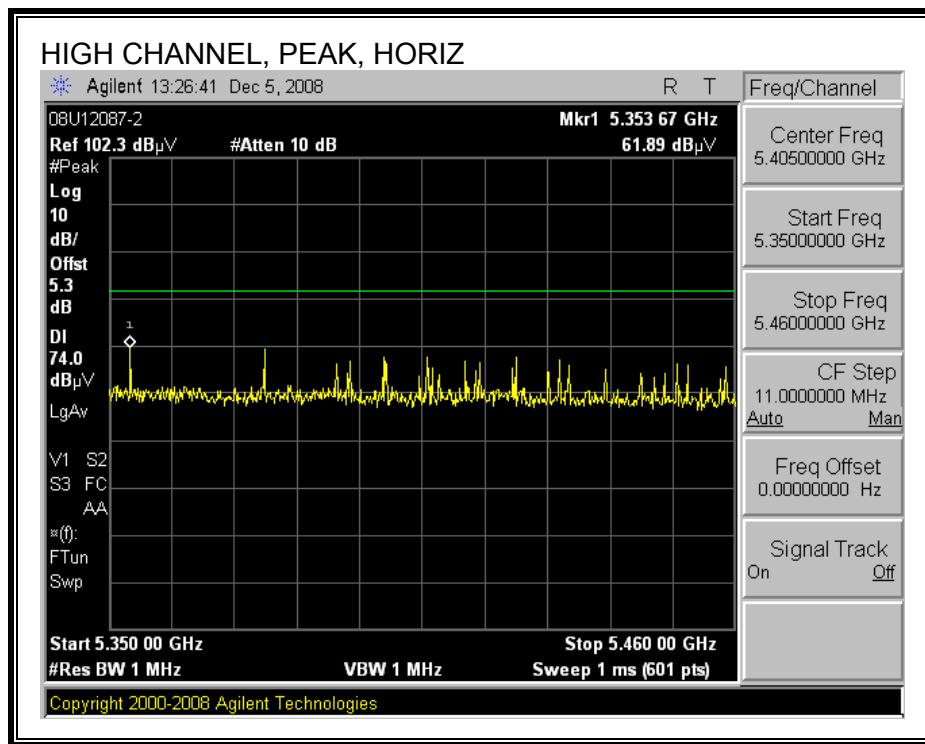

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

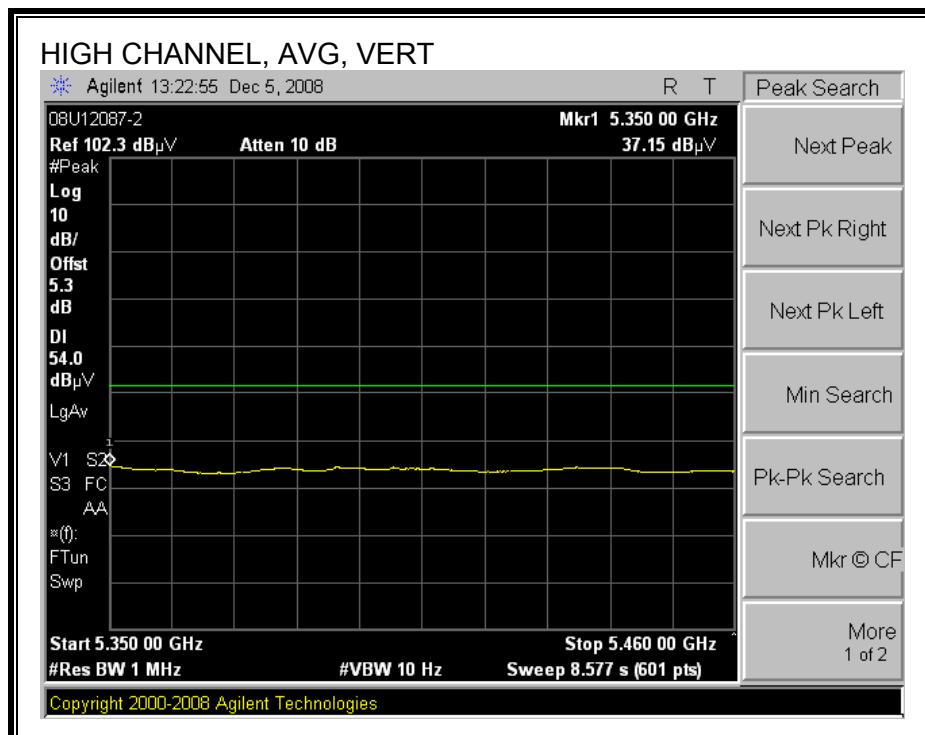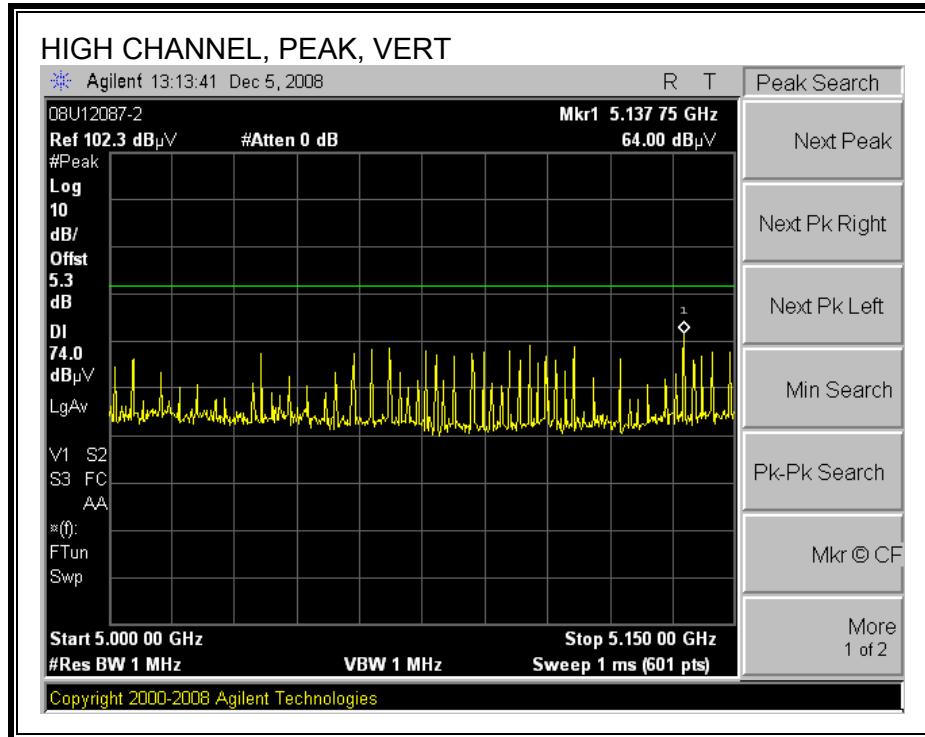

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																												
<p>Company: Apple Inc. Project #: 08U12087-2 Date: 12/05/08 Test Engineer: Thanh Nguyen Configuration: EUT and remote support Laptop Mode: Transmit HT40 band</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T119; S/N: 29301 @3m</td> <td>T34 HP 8449B</td> <td>T88 Miteq 26-40GHz</td> <td colspan="4">T125; ARA 18-26GHz; S/N:1007</td> <td>FCC 15.205</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="7"> <u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz, VBW=10Hz </td> </tr> <tr> <td>f GHz</td> <td>Dist (m)</td> <td>Read Pk dBuV</td> <td>Read Avg. dBuV</td> <td>AF dB/m</td> <td>CL dB</td> <td>Amp dB</td> <td>D Corr dB</td> <td>Fltr dB</td> <td>Peak dBuV/m</td> <td>Avg dBuV/m</td> <td>Pk Lim dBuV/m</td> <td>Avg Lim dBuV/m</td> <td>Pk Mar dB</td> <td>Avg Mar dB</td> <td>Notes (V/H)</td> </tr> </table> <p>Low Ch 5190MHz</p> <table border="1"> <tr> <td>15.570</td> <td>3.0</td> <td>35.3</td> <td>22.1</td> <td>35.6</td> <td>11.4</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>50.1</td> <td>36.9</td> <td>74</td> <td>54</td> <td>-23.9</td> <td>-17.1</td> <td>V</td> </tr> <tr> <td>15.570</td> <td>3.0</td> <td>34.2</td> <td>22.0</td> <td>35.6</td> <td>11.4</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>48.9</td> <td>36.8</td> <td>74</td> <td>54</td> <td>-25.1</td> <td>-17.2</td> <td>H</td> </tr> </table> <p>High Ch 5230MHz</p> <table border="1"> <tr> <td>15.690</td> <td>3.0</td> <td>35.8</td> <td>22.1</td> <td>36.1</td> <td>11.4</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>51.2</td> <td>37.5</td> <td>74</td> <td>54</td> <td>-22.8</td> <td>-16.5</td> <td>V</td> </tr> <tr> <td>15.690</td> <td>3.0</td> <td>34.9</td> <td>21.8</td> <td>36.1</td> <td>11.4</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>50.3</td> <td>37.2</td> <td>74</td> <td>54</td> <td>-23.7</td> <td>-16.8</td> <td>H</td> </tr> </table> <p>Spurious emissions</p> <table border="1"> <tr> <td>1.665</td> <td>3.0</td> <td>55.3</td> <td>34.2</td> <td>30.1</td> <td>3.1</td> <td>-37.3</td> <td>0.0</td> <td>0.0</td> <td>51.2</td> <td>30.1</td> <td>74</td> <td>54</td> <td>-22.8</td> <td>-23.9</td> <td>H</td> </tr> </table> <p>No other emissions were detected above 3rd harmonic.</p> <p>Rev. 10.15.08</p> <p> f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss </p> <p> Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter </p> <p> Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit </p>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T119; S/N: 29301 @3m	T34 HP 8449B	T88 Miteq 26-40GHz	T125; ARA 18-26GHz; S/N:1007				FCC 15.205	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz, VBW=10Hz							f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	15.570	3.0	35.3	22.1	35.6	11.4	-32.2	0.0	0.0	50.1	36.9	74	54	-23.9	-17.1	V	15.570	3.0	34.2	22.0	35.6	11.4	-32.2	0.0	0.0	48.9	36.8	74	54	-25.1	-17.2	H	15.690	3.0	35.8	22.1	36.1	11.4	-32.2	0.0	0.0	51.2	37.5	74	54	-22.8	-16.5	V	15.690	3.0	34.9	21.8	36.1	11.4	-32.2	0.0	0.0	50.3	37.2	74	54	-23.7	-16.8	H	1.665	3.0	55.3	34.2	30.1	3.1	-37.3	0.0	0.0	51.2	30.1	74	54	-22.8	-23.9	H
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																					
T119; S/N: 29301 @3m	T34 HP 8449B	T88 Miteq 26-40GHz	T125; ARA 18-26GHz; S/N:1007				FCC 15.205																																																																																																																																																					
Hi Frequency Cables																																																																																																																																																												
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz, VBW=10Hz																																																																																																																																																				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																													
15.570	3.0	35.3	22.1	35.6	11.4	-32.2	0.0	0.0	50.1	36.9	74	54	-23.9	-17.1	V																																																																																																																																													
15.570	3.0	34.2	22.0	35.6	11.4	-32.2	0.0	0.0	48.9	36.8	74	54	-25.1	-17.2	H																																																																																																																																													
15.690	3.0	35.8	22.1	36.1	11.4	-32.2	0.0	0.0	51.2	37.5	74	54	-22.8	-16.5	V																																																																																																																																													
15.690	3.0	34.9	21.8	36.1	11.4	-32.2	0.0	0.0	50.3	37.2	74	54	-23.7	-16.8	H																																																																																																																																													
1.665	3.0	55.3	34.2	30.1	3.1	-37.3	0.0	0.0	51.2	30.1	74	54	-22.8	-23.9	H																																																																																																																																													

8.2. RECEIVER ABOVE 1 GHz IN THE WORST CASE MODE

8.2.1. RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 5.2 GHz BAND


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																			
Company:	Apple Inc.																		
Project #:	08U12087-2																		
Date:	12/01/08																		
Test Engineer:	Thanh Nguyen																		
Configuration:	EUT and remote support Laptop																		
Mode:	Receive mode 20MHz, 5.8GHz band																		
<u>Test Equipment:</u>																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit			
T73; S/N: 6717 @3m				T34 HP 8449B								T125; ARA 18-26GHz; S/N:1007				RX RSS 210			
Hi Frequency Cables																			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter			
3' cable 22807700				12' cable 22807600				20' cable 22807500											
<u>Peak Measurements</u> RBW=VBW=1MHz																			
<u>Average Measurements</u> RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
1.027	3.0	53.5	46.8	25.8	2.4	-38.2	0.0	0.0	43.5	36.8	74	54	-30.5	-17.2	H				
1.431	3.0	52.3	30.9	26.9	2.9	-37.7	0.0	0.0	44.3	23.0	74	54	-29.7	-31.0	H				
2.030	3.0	44.8	32.1	28.5	3.5	-36.8	0.0	0.0	39.9	27.3	74	54	-34.1	-26.7	H				
1.432	3.0	54.3	43.0	26.9	2.9	-37.7	0.0	0.0	46.3	35.1	74	54	-27.7	-18.9	V				
1.562	3.0	54.2	22.3	27.2	3.0	-37.5	0.0	0.0	46.9	15.0	74	54	-27.1	-39.0	V				
2.162	3.0	48.4	28.9	28.8	3.6	-36.6	0.0	0.0	44.1	24.6	74	54	-29.9	-29.4	V				
No other emissions were detected above system noise floor.																			
Rev. 10.15.08																			
f	Measurement Frequency			Amp	Preamp Gain												Average Field Strength Limit		
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters												Peak Field Strength Limit		
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m												Margin vs. Average Limit		
AF	Antenna Factor			Peak	Calculated Peak Field Strength												Margin vs. Peak Limit		
CL	Cable Loss			HPF	High Pass Filter														

8.2.2. RX ABOVE 1 GHz FOR 40 MHz BANDWIDTH IN THE 5.2 GHz BAND

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	Apple Inc.														
Project #:	08U12087-2														
Date:	12/01/08														
Test Engineer:	Thanh Nguyen														
Configuration:	EUT and remote support Laptop														
Mode:	Receive mode 40MHz band.														
<u>Test Equipment:</u>															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T73; S/N: 6717 @3m			T34 HP 8449B						T125; ARA 18-26GHz; S/N:1007			RX RSS 210			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500									Average Measurements RBW=1MHz ; VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.033	3.0	59.2	47.3	25.8	2.4	-38.2	0.0	0.0	49.1	37.3	74	54	-24.9	-16.7	H
1.431	3.0	59.0	34.5	26.9	2.9	-37.7	0.0	0.0	51.1	26.5	74	54	-22.9	-27.5	H
1.496	3.0	57.9	31.3	27.0	2.9	-37.6	0.0	0.0	50.3	23.7	74	54	-23.7	-30.3	H
1.661	3.0	58.5	34.7	27.5	3.1	-37.3	0.0	0.0	51.7	27.9	74	54	-22.3	-26.1	H
1.031	3.0	57.4	43.0	25.8	2.4	-38.2	0.0	0.0	47.3	33.0	74	54	-26.7	-21.0	V
1.430	3.0	60.0	33.5	26.9	2.9	-37.7	0.0	0.0	52.0	25.5	74	54	-22.0	-28.2	V
2.450	3.0	58.1	38.3	29.4	3.9	-36.3	0.0	0.0	55.1	35.3	74	54	-18.9	-18.7	V
No other emissions were detected above system noise floor.															
Rev. 10.15.08															
f	Measurement Frequency				Amp	Preamp Gain				Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss				HPF	High Pass Filter									

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

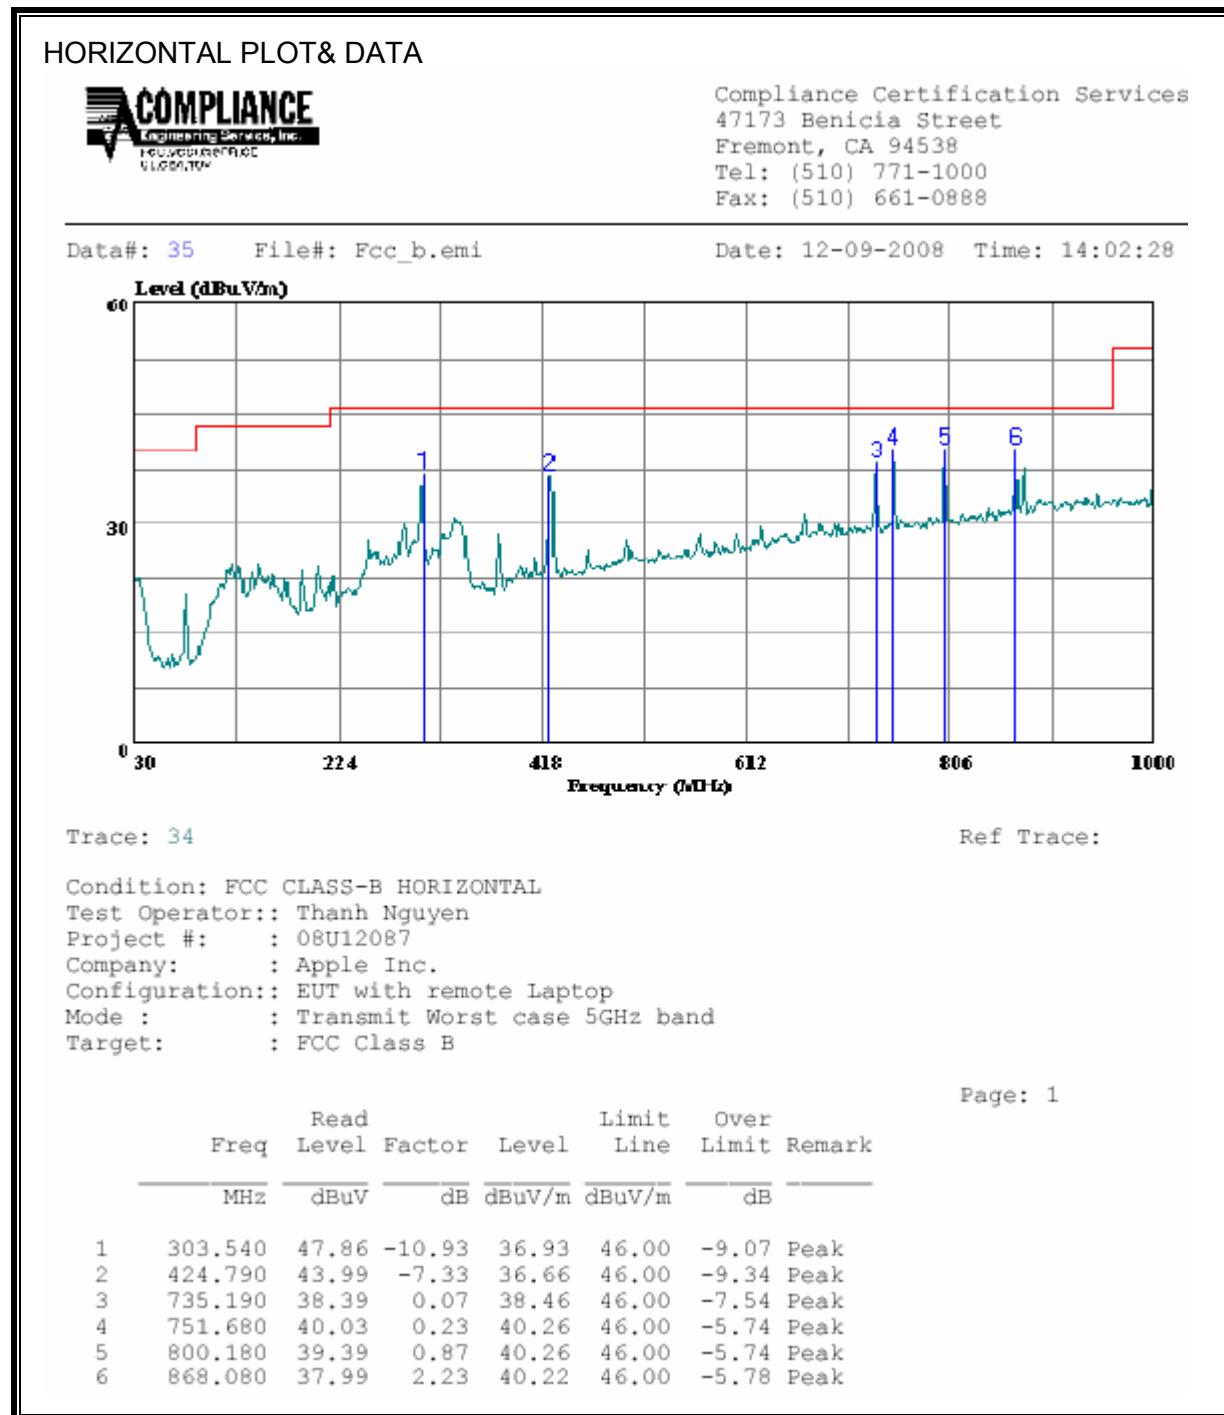


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT& DATA



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 33 File#: Fcc_b.emi Date: 12-09-2008 Time: 13:56:54

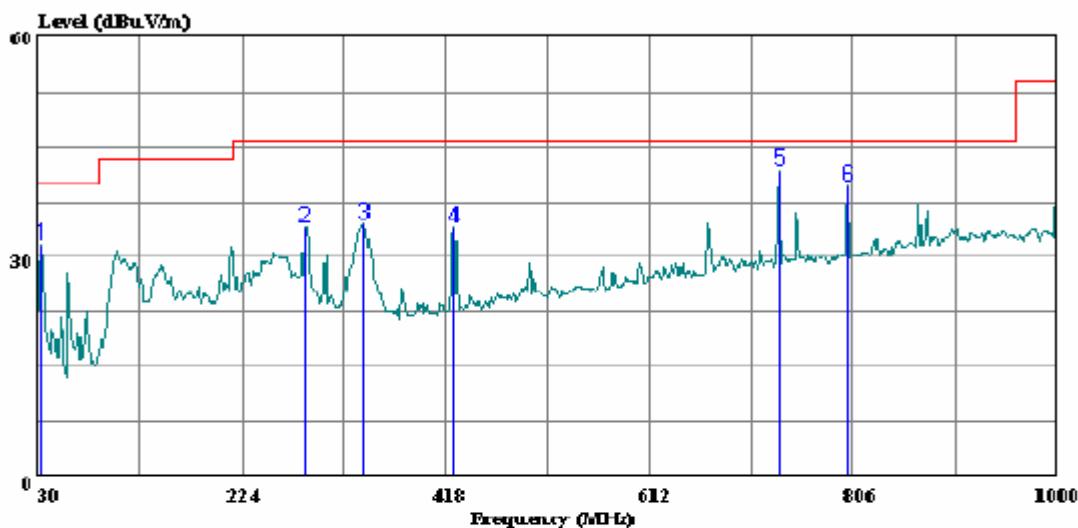

Trace: 32

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator:: Thanh Nguyen
Project #: 08U12087
Company: Apple Inc.
Configuration:: EUT with remote Laptop
Mode : Transmit Worst case 5GHz band
Target: FCC Class B

Page: 1

Freq	Read		Limit Line	Over Limit	Remark
	Level	Factor			
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	31.940	40.01	-8.30	31.71	40.00 -8.29 Peak
2	284.140	45.77	-11.75	34.02	46.00 -11.98 Peak
3	339.430	44.56	-9.93	34.63	46.00 -11.37 Peak
4	426.730	41.25	-7.27	33.98	46.00 -12.02 Peak
5	735.190	41.67	0.07	41.74	46.00 -4.26 Peak
6	800.180	38.81	0.87	39.68	46.00 -6.32 Peak

8.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

RSS-Gen 7.2.2

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

Table 2 – AC Power Lines Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50


^{*} Decreases with the logarithm of the frequency.

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit (dB)	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.56	47.63	--	41.76	0.00	56.00	46.00	-8.37	-4.24	L1	
0.65	46.07	--	41.67	0.00	56.00	46.00	-9.93	-4.33	L1	
3.94	43.85	--	35.90	0.00	56.00	46.00	-12.15	-10.10	L1	
0.57	48.86	--	45.70	0.00	56.00	46.00	-7.14	-0.30	L2	
0.64	45.50	--	40.41	0.00	56.00	46.00	-10.50	-5.59	L2	
2.49	44.67	--	32.19	0.00	56.00	46.00	-11.33	-13.81	L2	
6 Worst Data										

LINE 1 RESULTS

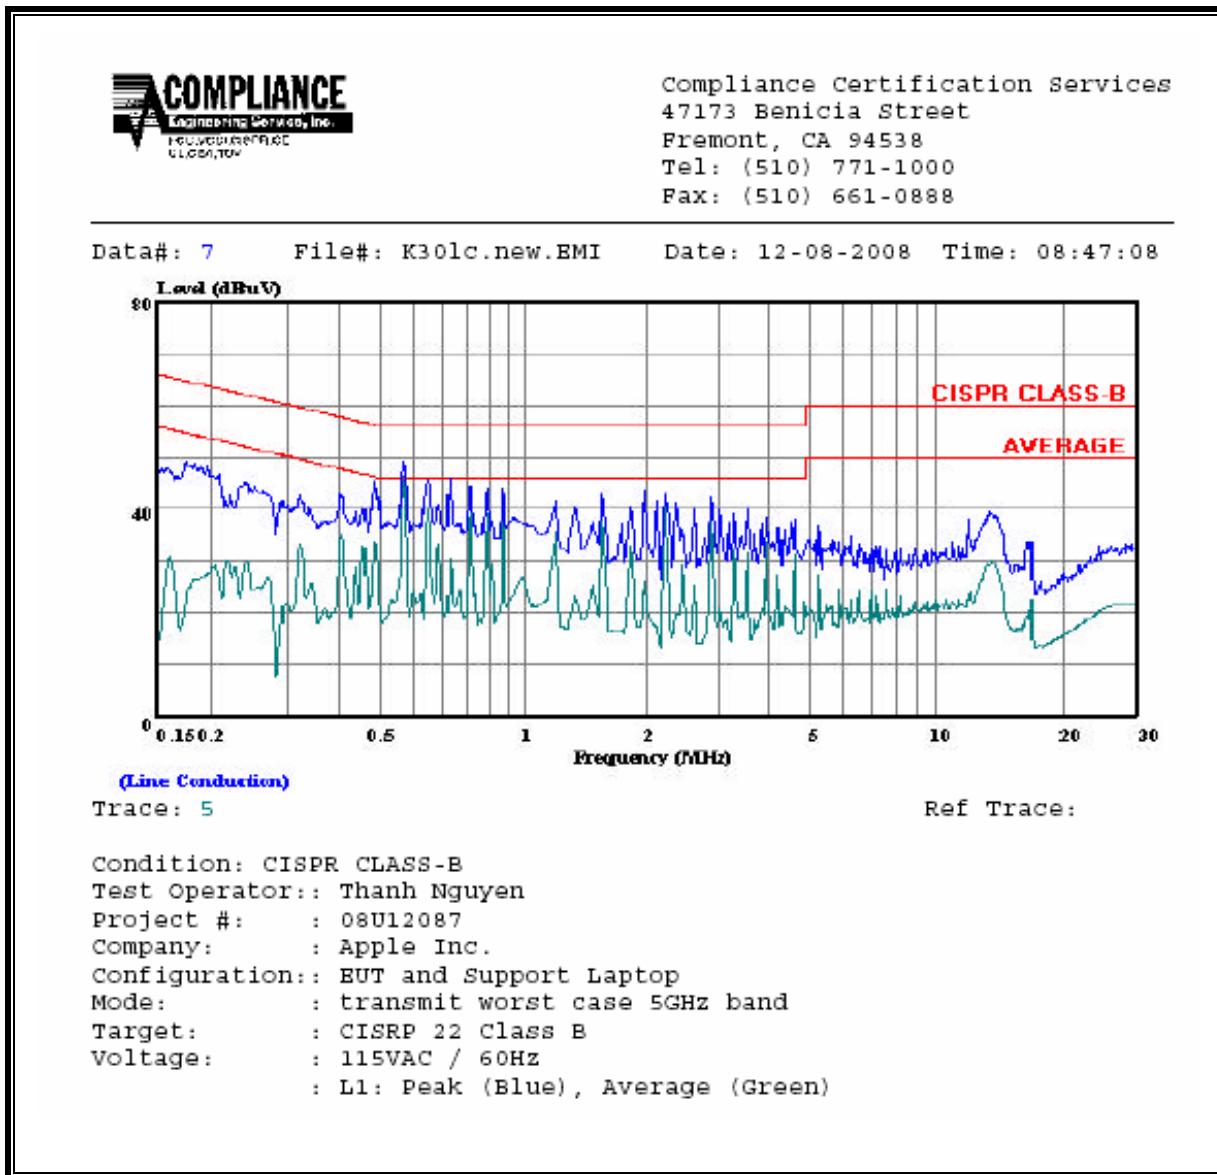

LINE 2 RESULTS

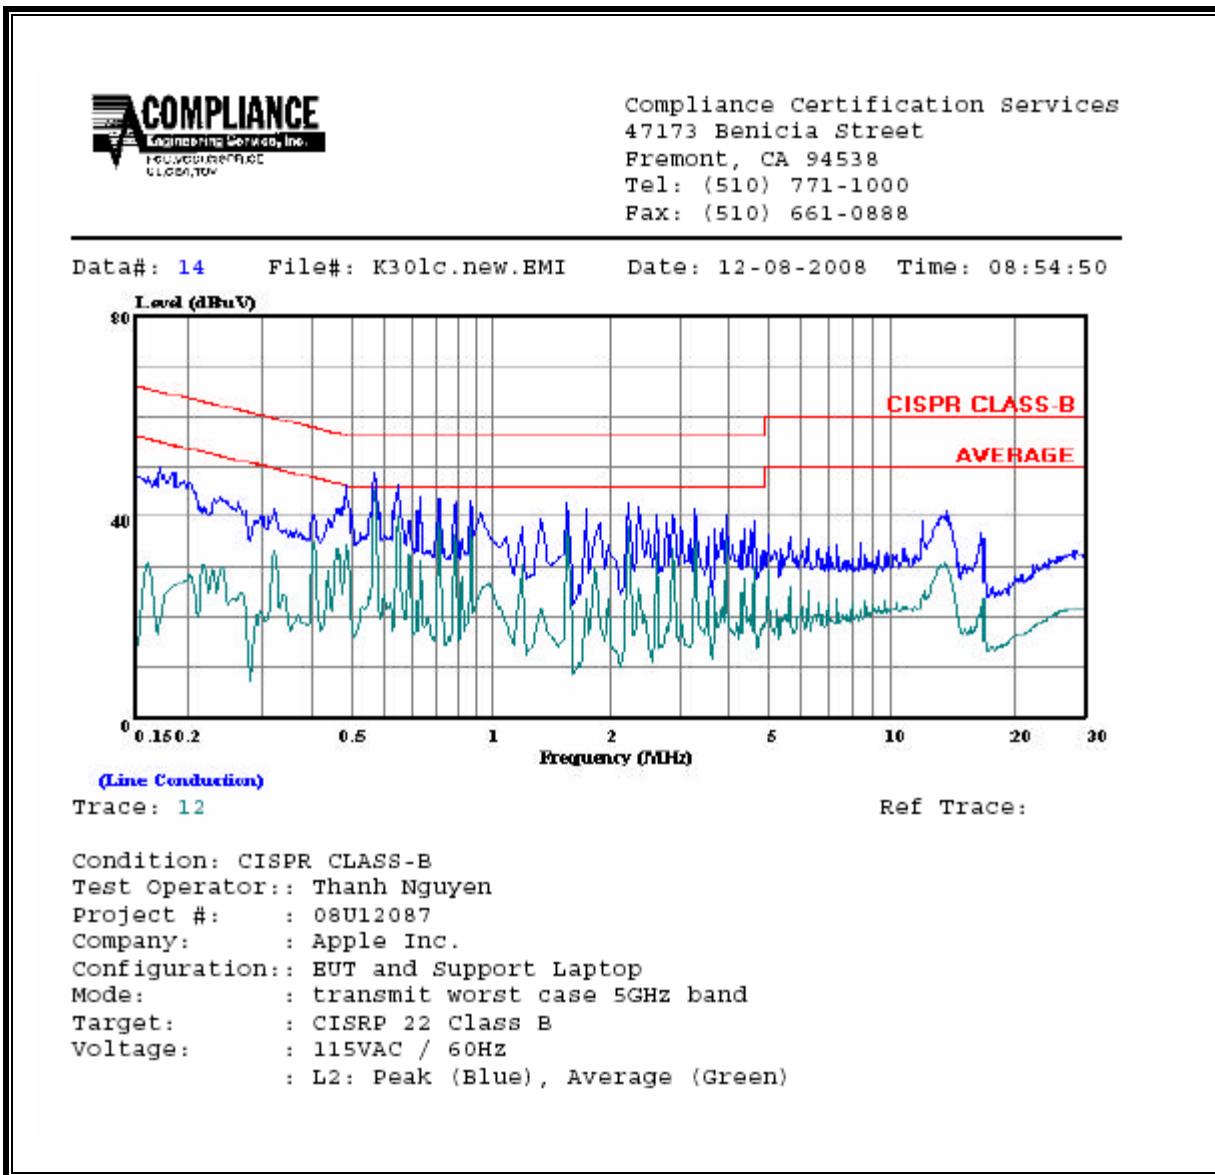

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/f	2.19/f		6
10–30	28	2.19/f		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\ 000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\ 000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μ T) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm^2

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10) / (d^2)}$$

The power density in units of mW/cm^2 is converted to units of W/m^2 by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
WLAN, 11b	2.4 GHz	20.0	21.72	5.08	0.10	0.95
WLAN, 11g	2.4 GHz	20.0	22.24	5.08	0.11	1.07
WLAN, HT20	2.4 GHz	20.0	22.37	3.49	0.08	0.77
WLAN, 11a	5.8 GHz	20.0	28.37	6.03	0.55	5.47
WLAN, HT20	5.8 GHz	20.0	28.25	3.40	0.29	2.91
WLAN, HT40	5.8 GHz	20.0	28.25	3.40	0.29	2.91
WLAN, 11a	5.2 GHz	20.0	14.12	6.94	0.03	0.25
WLAN, HT20	5.2 GHz	20.0	12.96	4.21	0.01	0.10
WLAN, HT40	5.2 GHz	20.0	16.10	4.21	0.02	0.21

Notes:

Antenna Gain for 11b, 11g and 11a is the combined antenna gain for both chains.

Antenna gain for HT20 and HT40 is the maximum antenna gain of both chains.

Output power is the combined output power for both chains.

CO-LOCATED MPE CALCULATIONS

For multiple colocated transmitters operating simultaneously the total power density can be calculated by summing the Power * Gain product (in linear units) of each transmitter.

yields

$$d = 0.282 * \sqrt{((P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)) / S}$$

where

d = distance in cm

Px = Power of transmitter x in mW

Gx = Numeric gain of antenna x

S = Power Density in mW/cm²

In the table below, Power and Gain are entered in units of dBm and dBi respectively, then converted to their linear forms for the purpose of the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Mode	Band	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
WLAN, 11g	2.4 GHz	22.24	5.08			
WLAN, 11a	5.8 GHz	28.37	6.03			
Combined				20.0	0.65	6.55