



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

Tablet with IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio

Model: A1474

**FCC ID: BCGA1474
IC: 579C-A1474**

REPORT NUMBER: 13U15555-4

ISSUE DATE: SEPTEMBER 17, 2013

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	09/17/13	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	12
7.1. ON TIME AND DUTY CYCLE RESULTS.....	12
7.2. MEASUREMENT METHODS	12
7.3. DUTY CYCLE PLOTS	13
8. ANTENNA PORT TEST RESULTS	14
8.1. 6 dB BANDWIDTH.....	14
8.2. 99% BANDWIDTH.....	17
8.3. OUTPUT POWER	20
8.4. AVERAGE POWER.....	23
8.5. POWER SPECTRAL DENSITY	24
8.6. CONDUCTED SPURIOUS EMISSIONS.....	27
9. RADIATED TEST RESULTS.....	31
9.1. LIMITS AND PROCEDURE	31
9.2. TRANSMITTER ABOVE 1 GHz	32
9.3. WORST-CASE ABOVE 18 GHz	42
9.4. WORST-CASE BELOW 1 GHz.....	43
10. AC POWER LINE CONDUCTED EMISSIONS.....	46
11. SETUP PHOTOS.....	51

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: Tablet with IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio

MODEL: A1474

SERIAL NUMBER: DLXKW04QFMN4

DATE TESTED: AUGUST 20 – AUGUST 26, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



Thu Chan
WiSE Operations Manager
UL Verification Services Inc.

TONY WANG
WiSE Technician
UL Verification Services Inc

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Tablet with IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	8.19	6.59

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain of 0.5dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Broadcom Broadcom Bluetool 1.5.6.2.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated with AC adapter and Headset, and the worst case was found to be at X position without AC adapter and headset.

The worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was including headset and AC charger.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A1401	60812	NA
Earphone	Apple	NA	NA	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.1m	To Spectrum Analyzer


I/O CABLES (RADIATED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Audio	1	Jack	Un-Shielded	0.5m	NA


I/O CABLES (AC POWER CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115	Un-Shielded	2m	NA
2	DC	1	USB	Un-Shielded	2m	NA
3	Audio	1	Jack	Un-Shielded	0.5m	NA


SETUP DIAGRAM FOR CONDUCTED TESTS

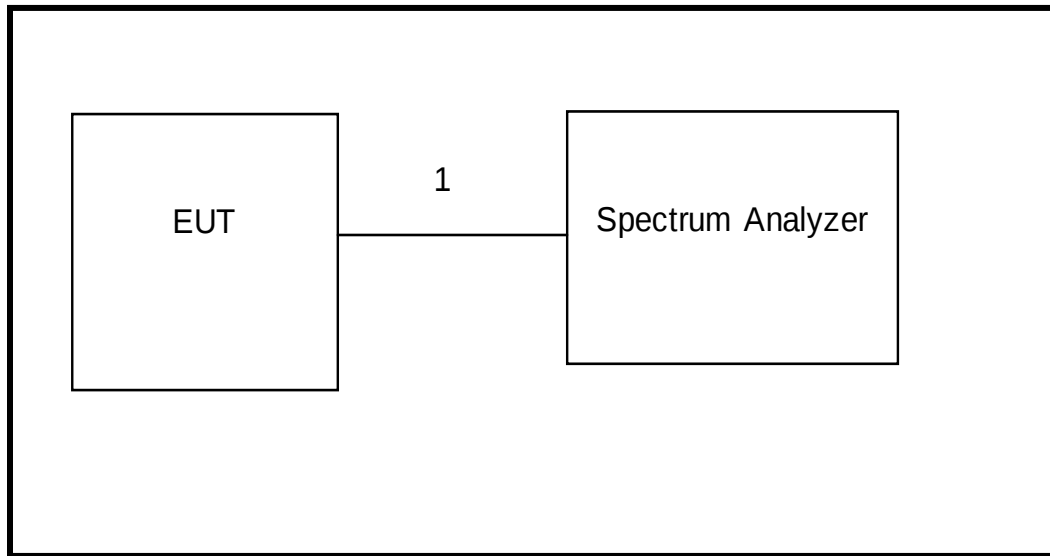

SETUP DIAGRAM FOR RADIATED TESTS

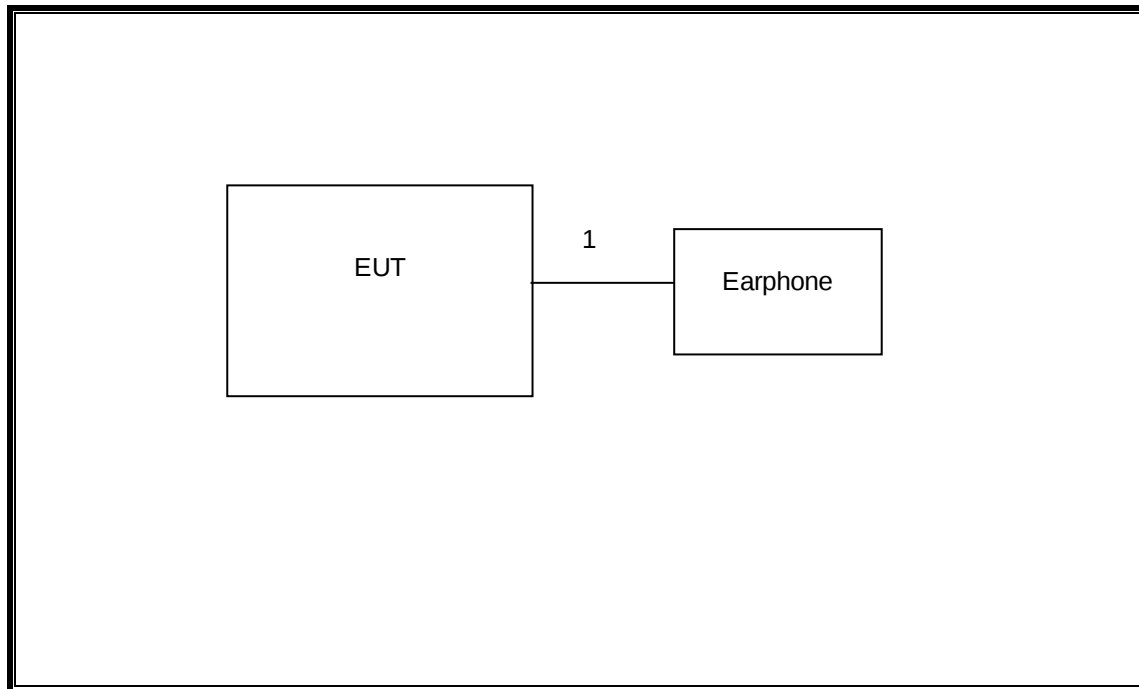

SETUP DIAGRAM FOR BELOW 1GHz & AC POWER CONDUCTED TESTS

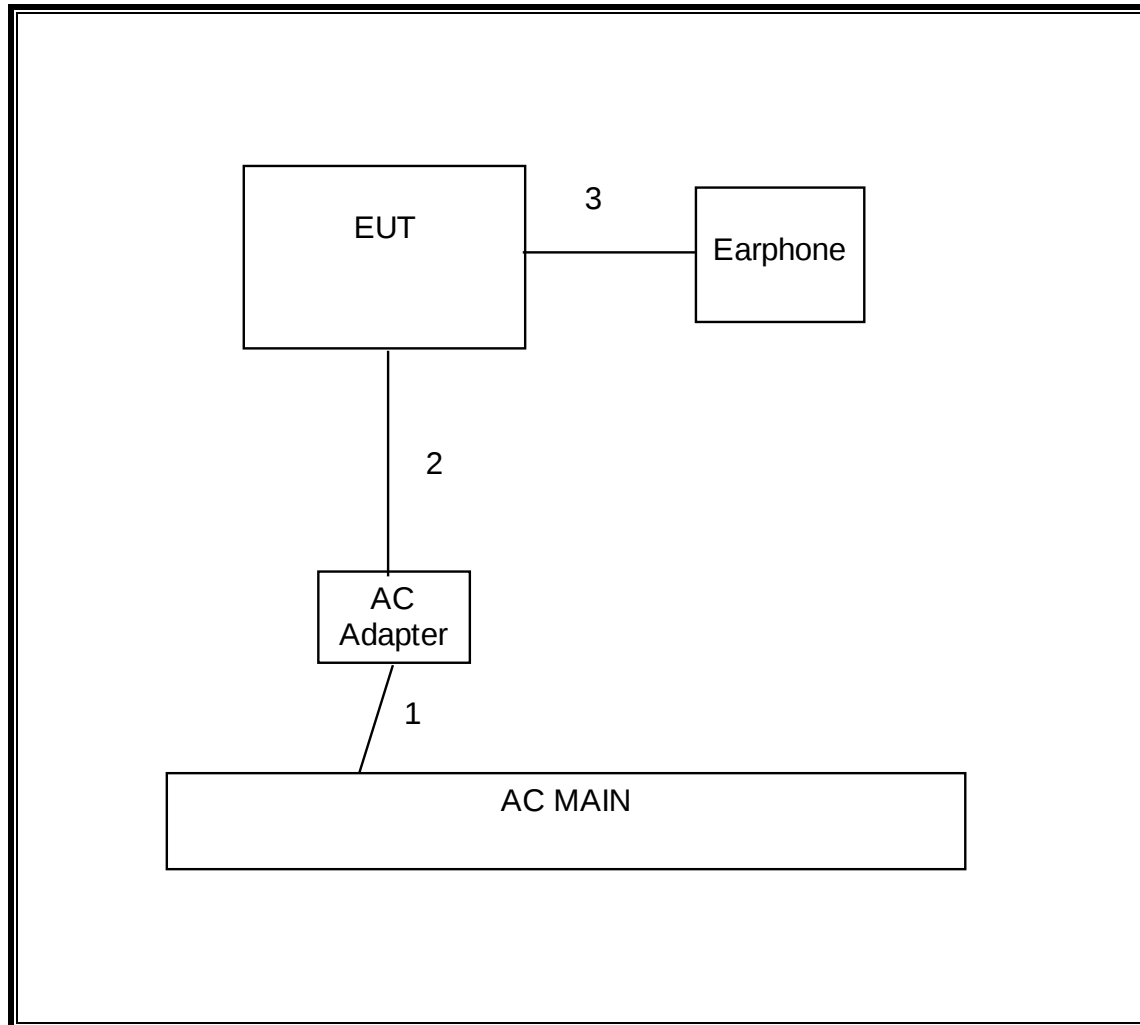

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	ETS Lindgren	3117	F00131	02/19/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	04/28/14
Peak / Average Power Sensor	Agilent / HP	N1911A	F00153	04/05/14
Peak Power Meter	Agilent / HP	E9323A	F00025	04/03/14
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00126	02/22/14
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	F00168	03/07/14
Preamplifier, 1300 MHz	Sonoma	310	F00008	11/06/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	F00165	03/18/14
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESHS20	N02396	08/15/14
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	04/17/14

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
BLE 2441MHZ	2.875	3.750	0.767	76.7%	1.154	0.348

7.2. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01.


Output Power: KDB 558074 D01.

Power Spectral Density: KDB 558074 D01.

Out-of-band emissions in non-restricted bands: KDB 558074 D01.

Out-of-band emissions in restricted bands: KDB 558074 D01.

7.3. DUTY CYCLE PLOTS

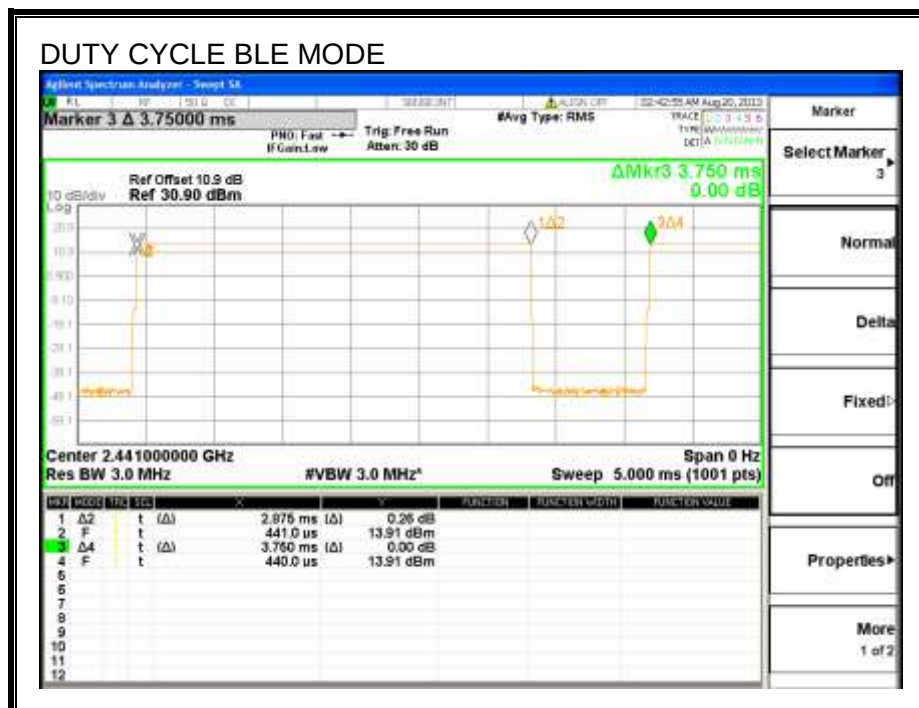

8. ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (KHz)	Minimum Limit (KHz)
Low	2402	716.700	500.0
Middle	2440	713.300	500.0
High	2480	713.300	500.0

6 dB BANDWIDTH

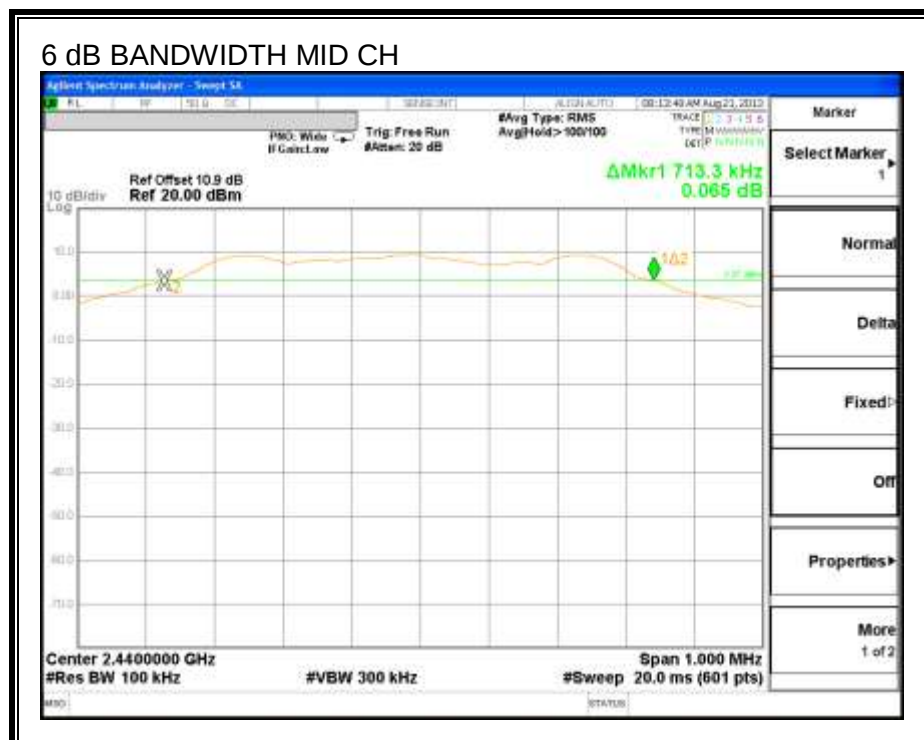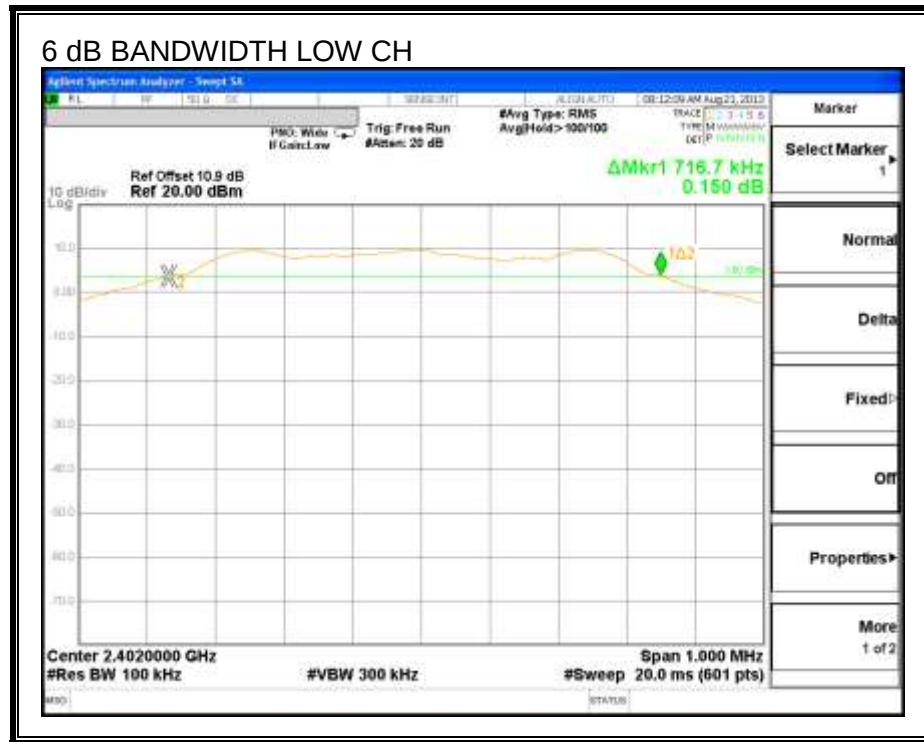

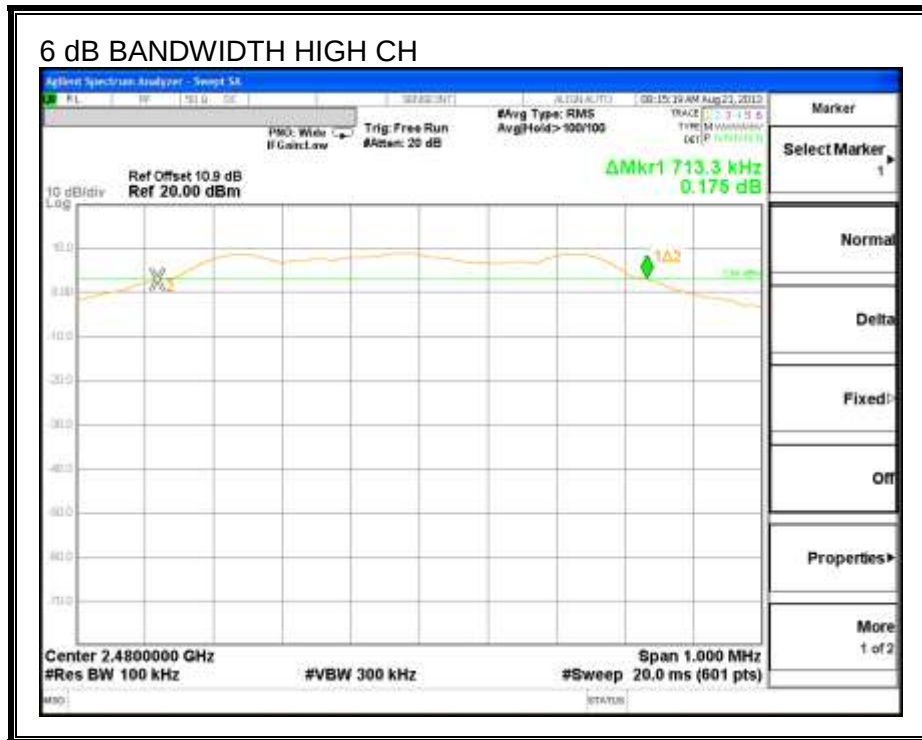

8.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0338
Middle	2440	1.0498
High	2480	1.0388

99% BANDWIDTH

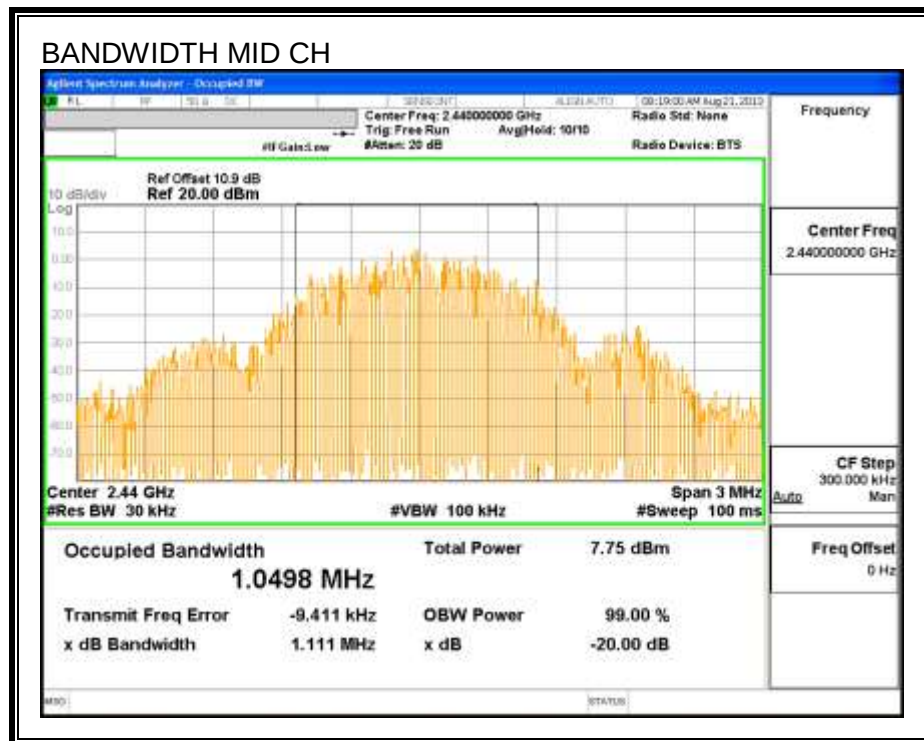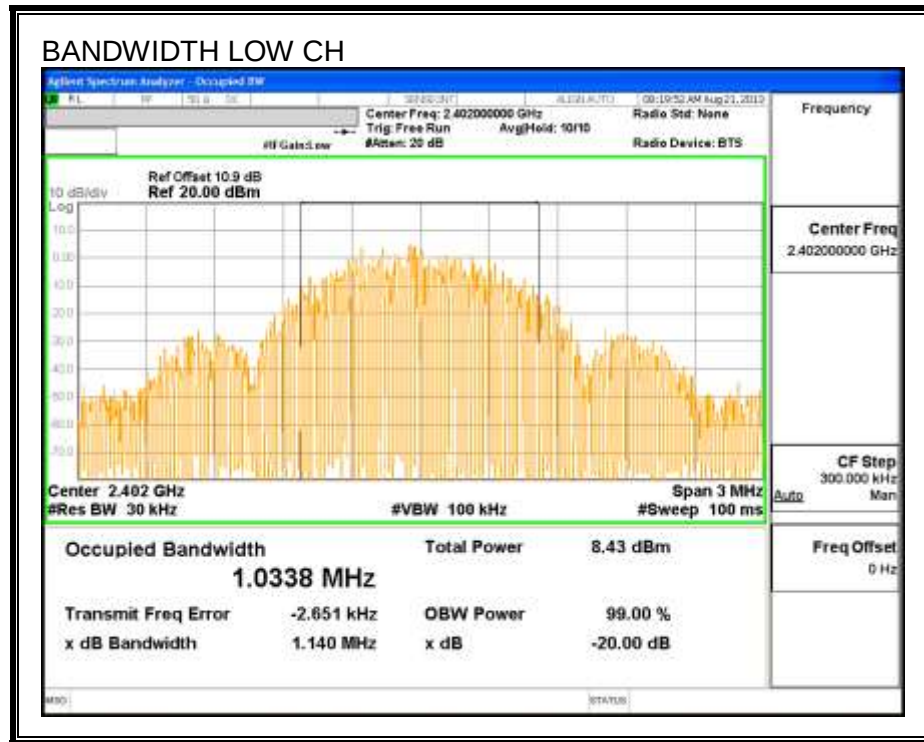

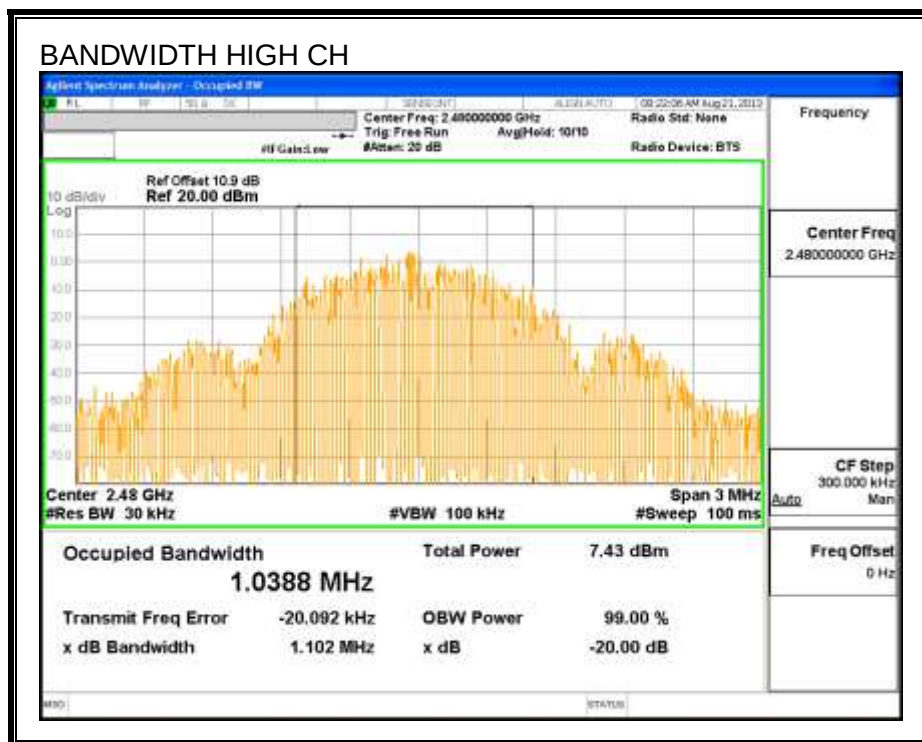

8.3. OUTPUT POWER

LIMIT

§15.247 (b) (1)



The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	7.860	30	-22.14
Middle	2440	8.050	30	-21.95
High	2480	8.187	30	-21.81

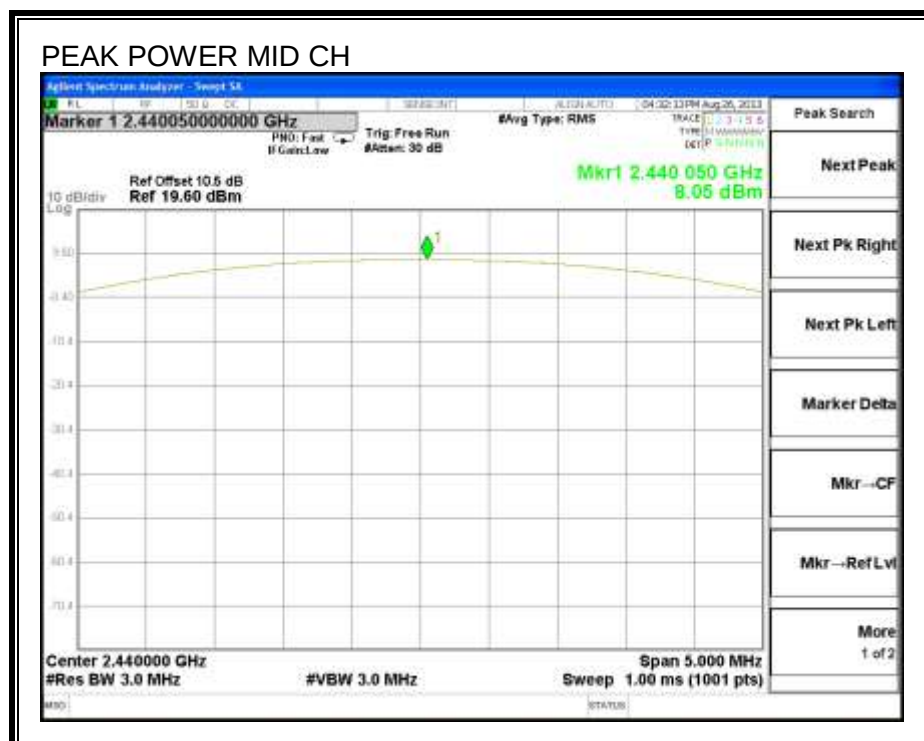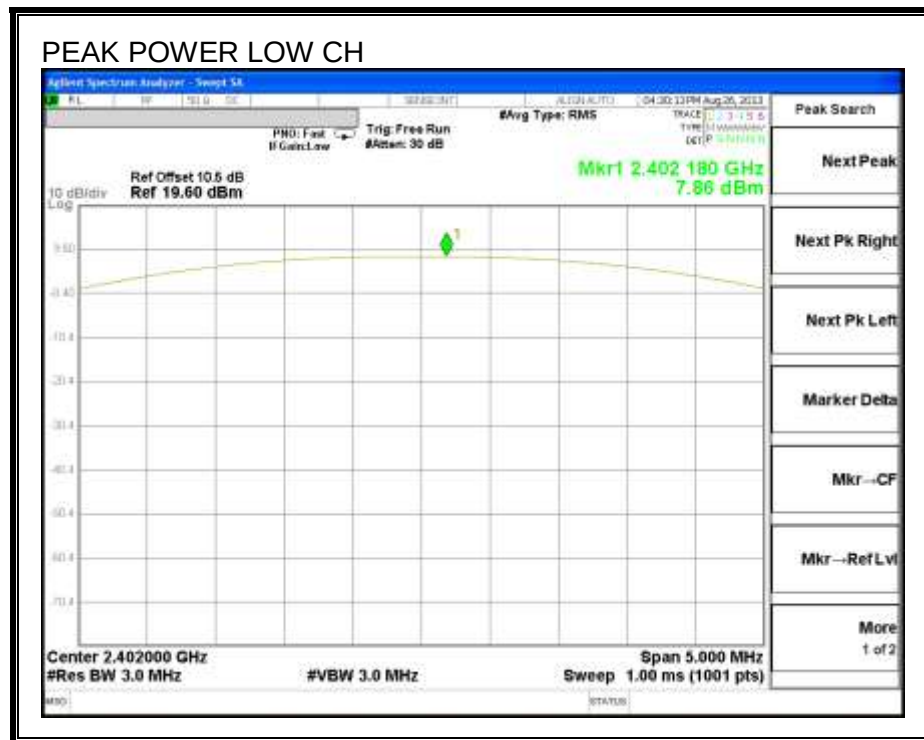

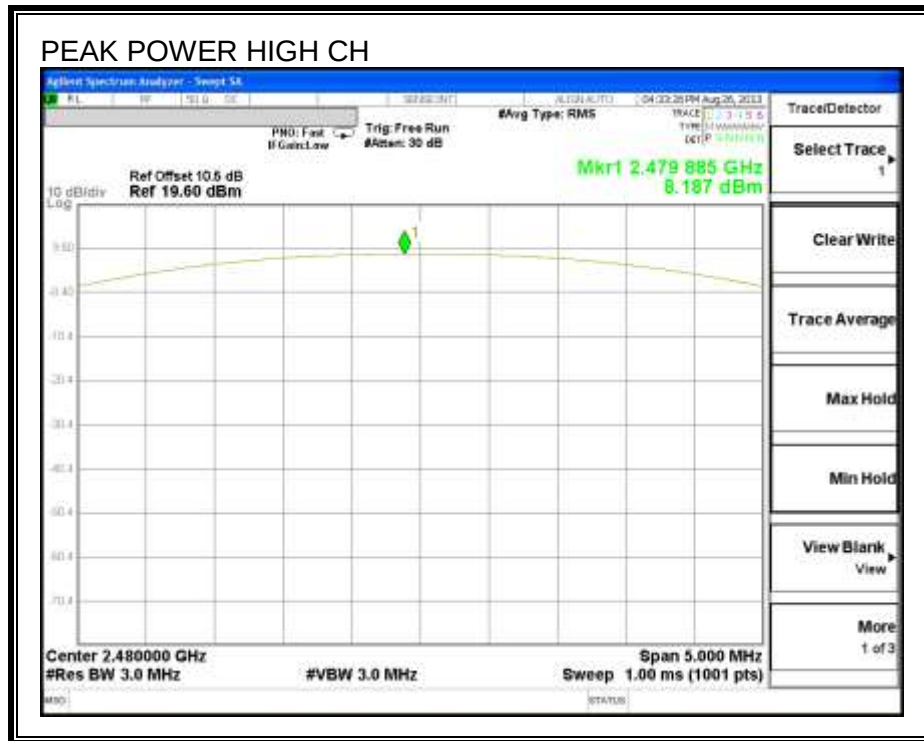

8.4. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.45
Middle	2440	7.49
High	2480	7.44

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-3.15	8	-11.15
Middle	2440	-3.27	8	-11.27
High	2480	-3.81	8	-11.81

POWER SPECTRAL DENSITY

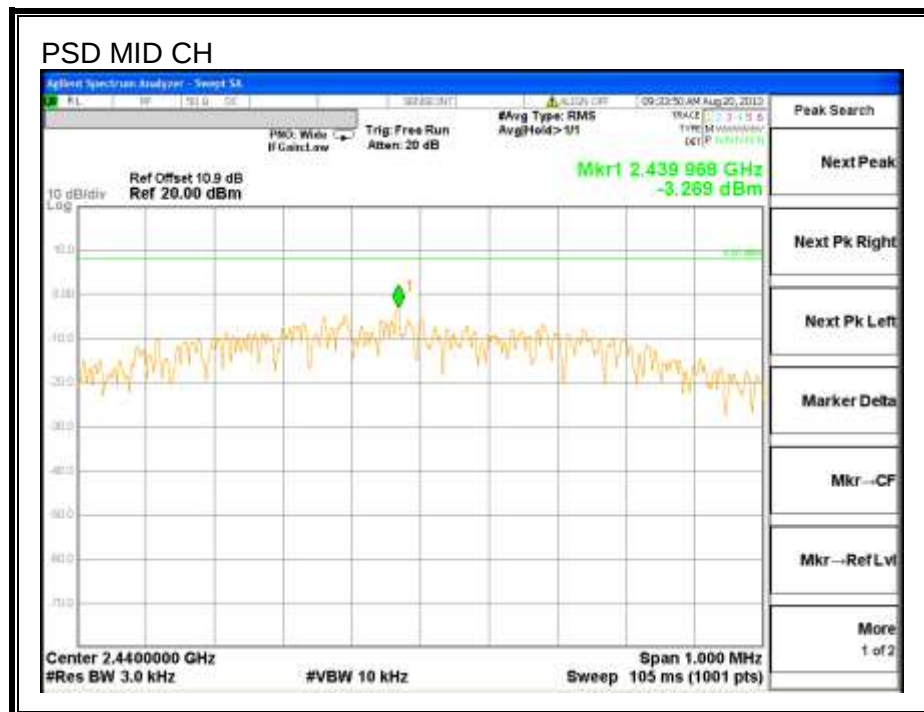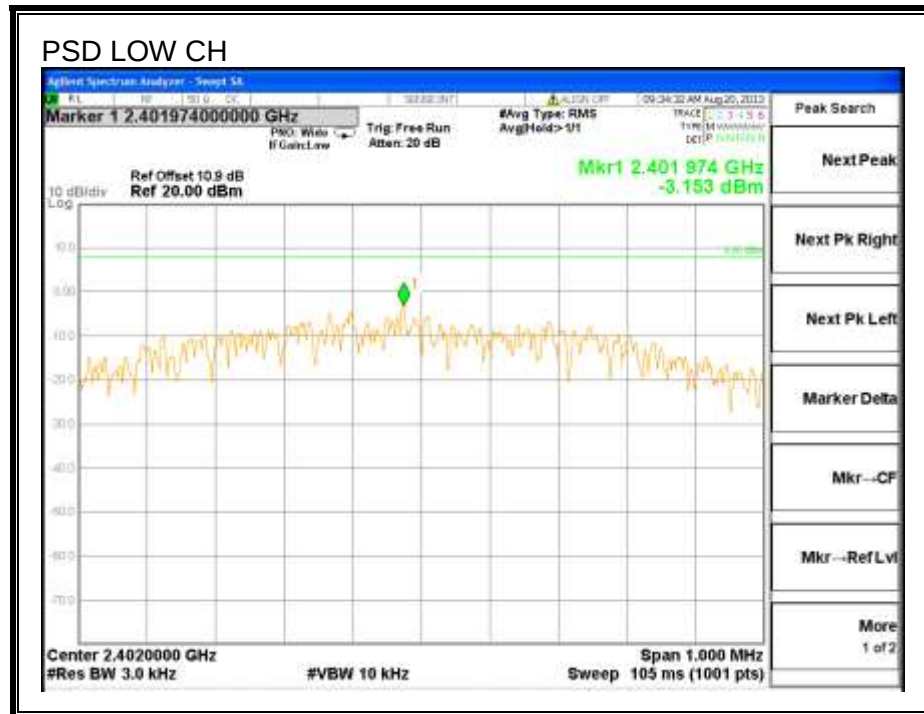

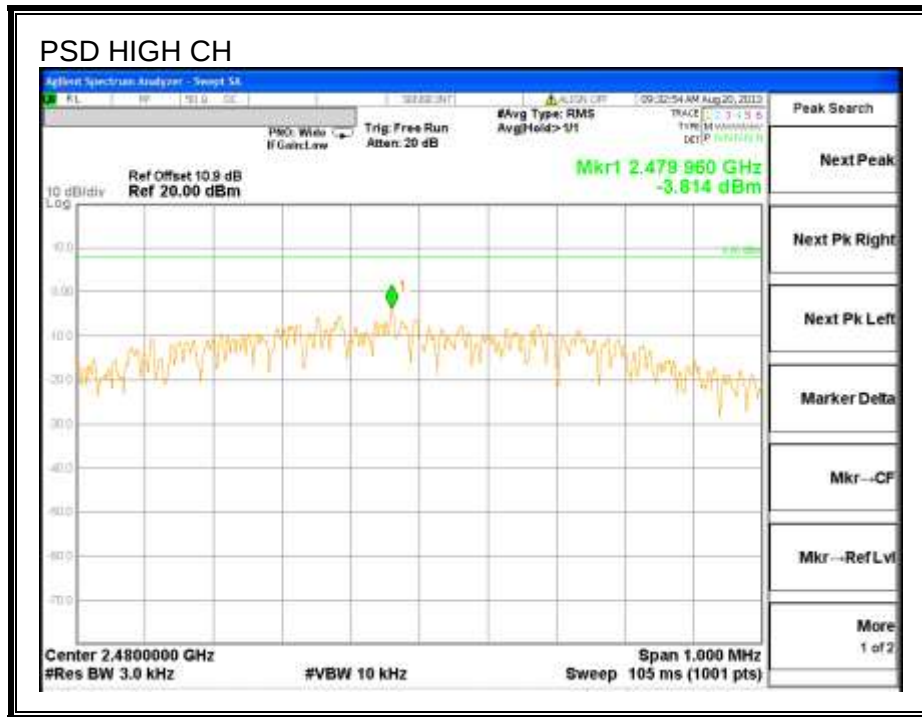

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

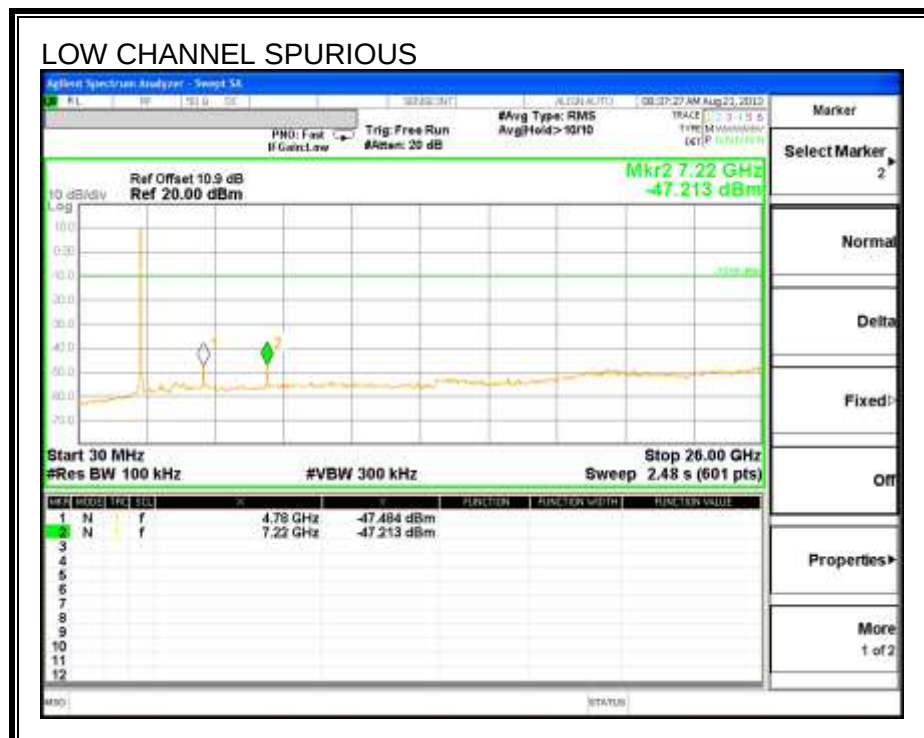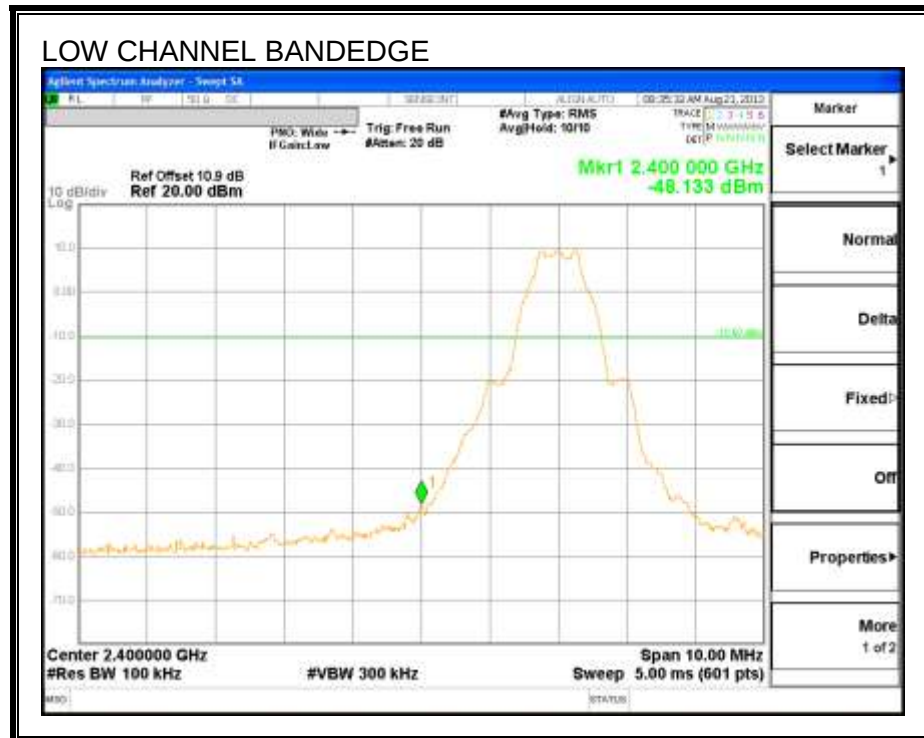

SPURIOUS EMISSIONS, MID CHANNEL

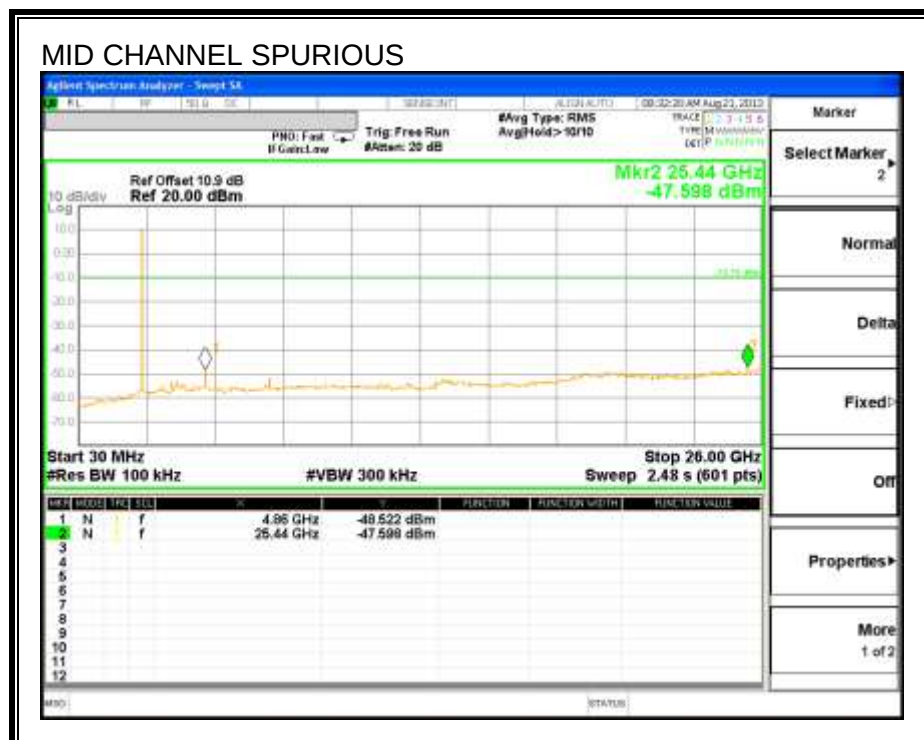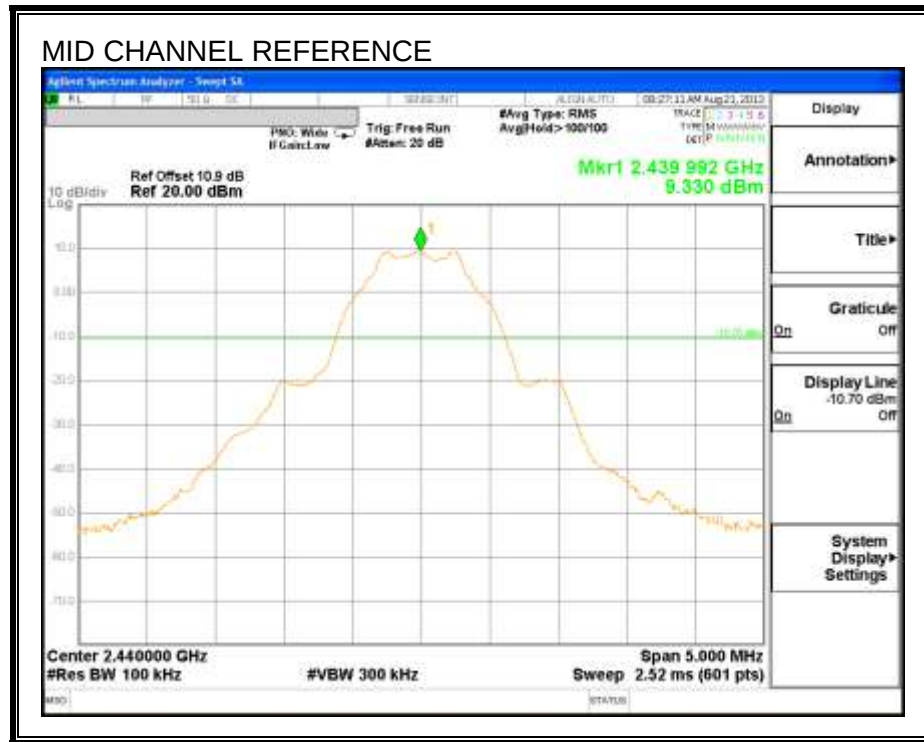

SPURIOUS EMISSIONS, HIGH CHANNEL

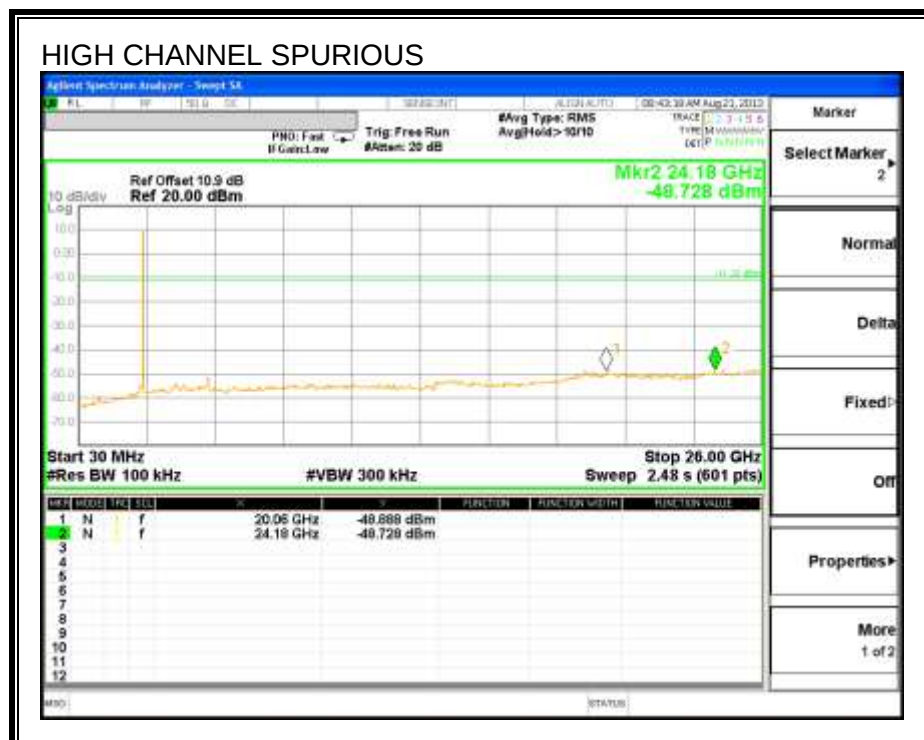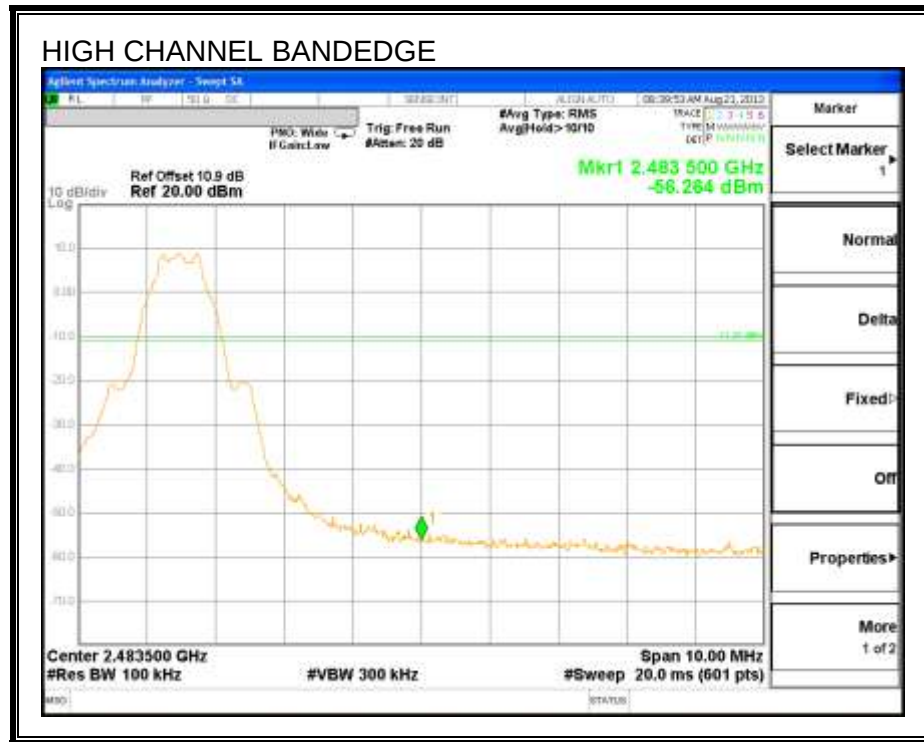

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

For 2.4 GHz band, the spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

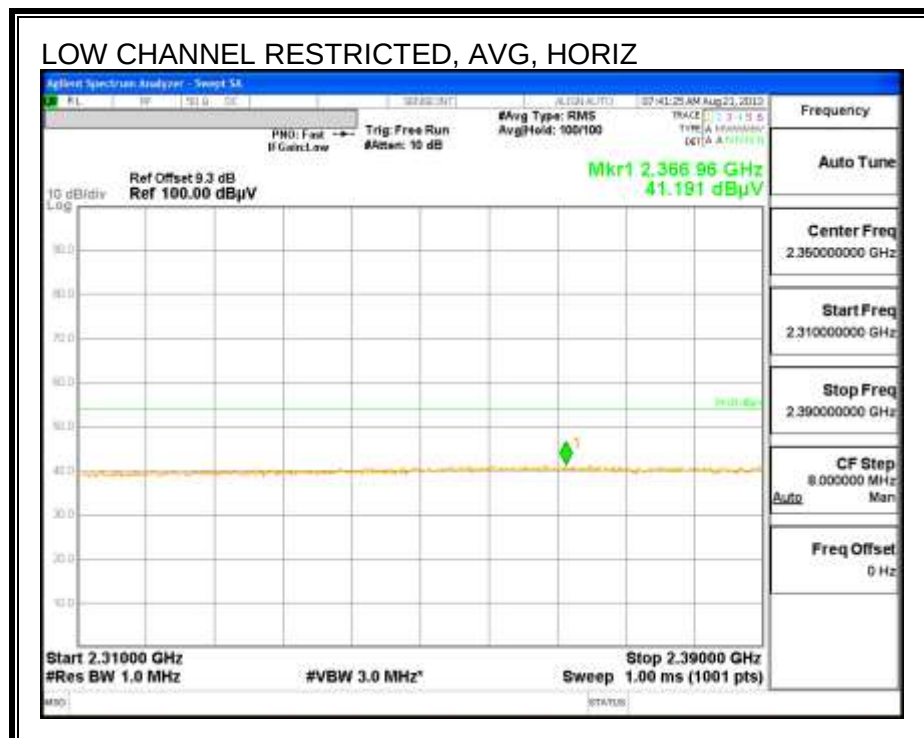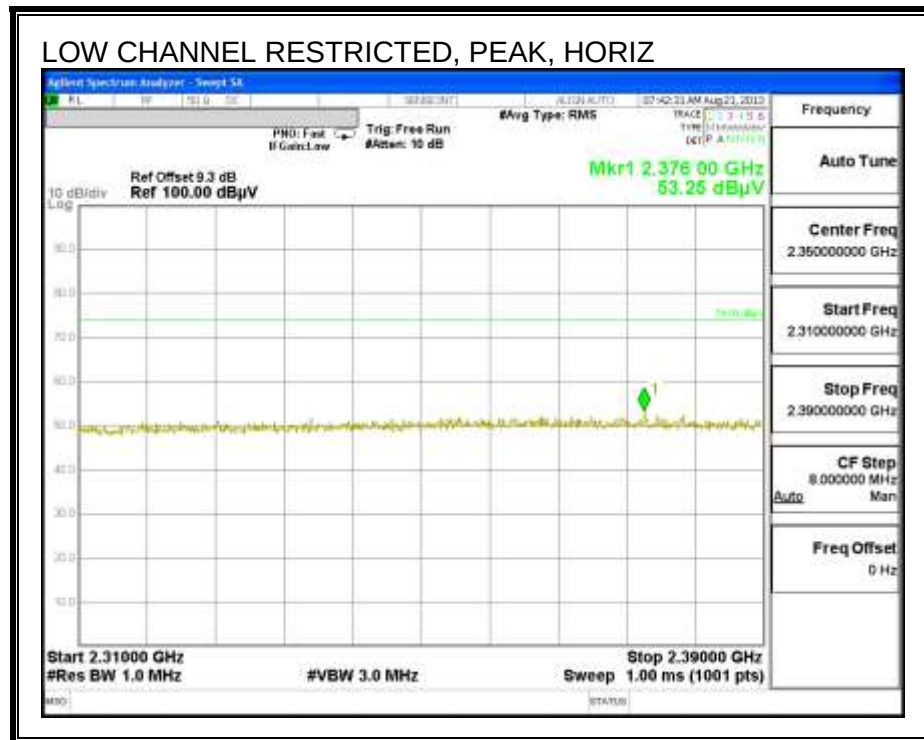



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

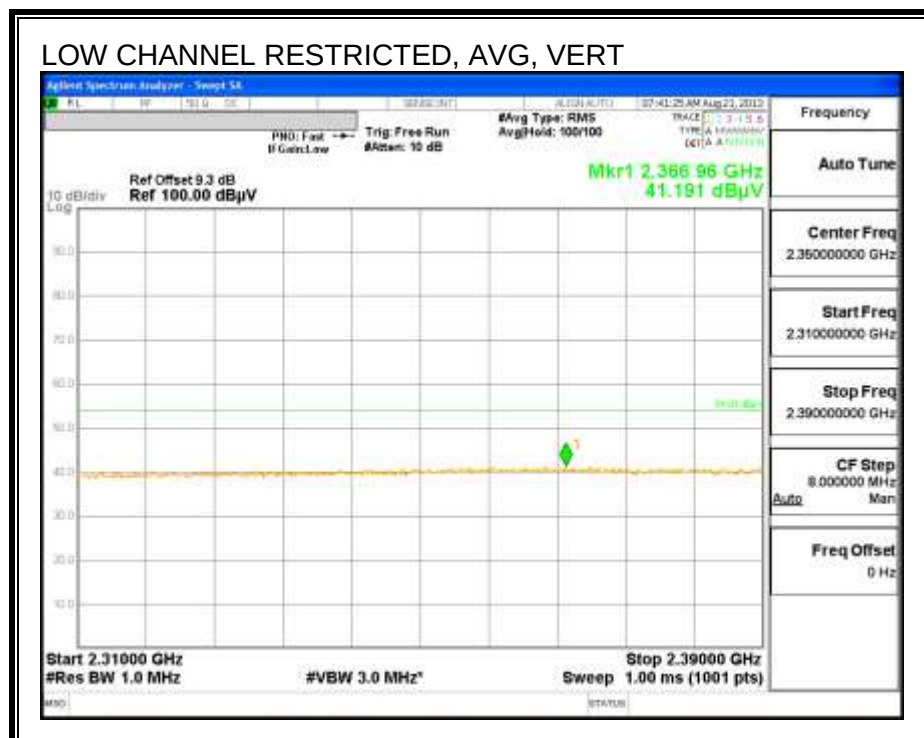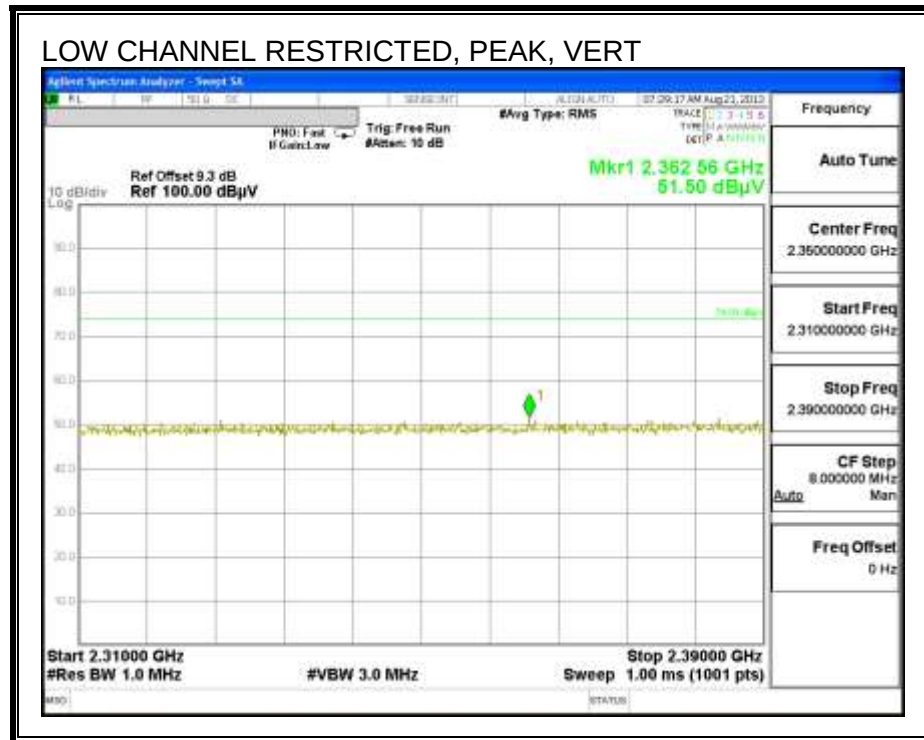

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

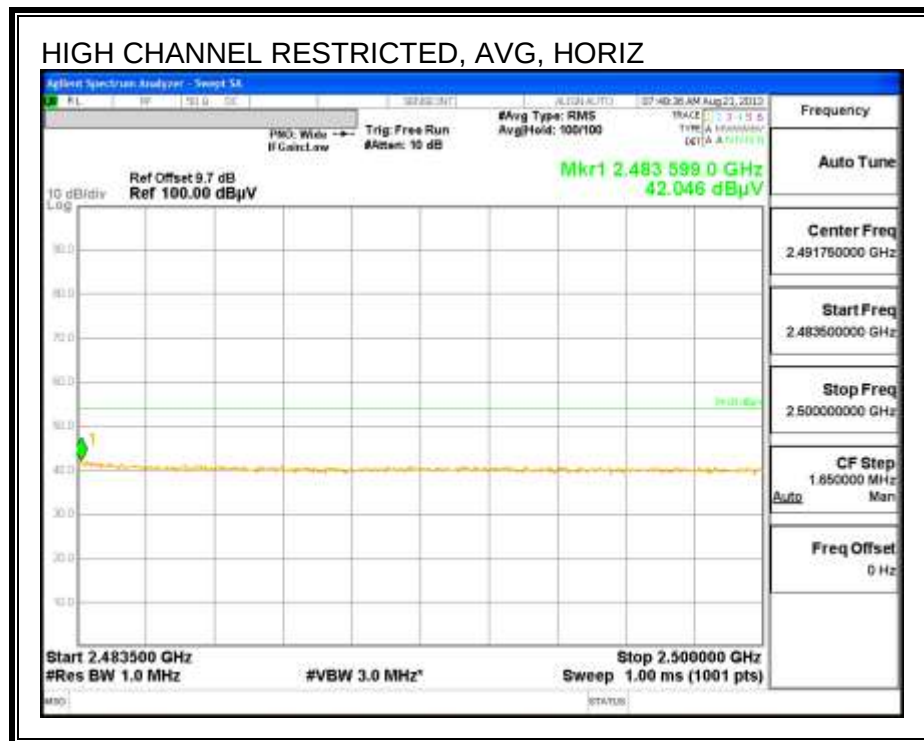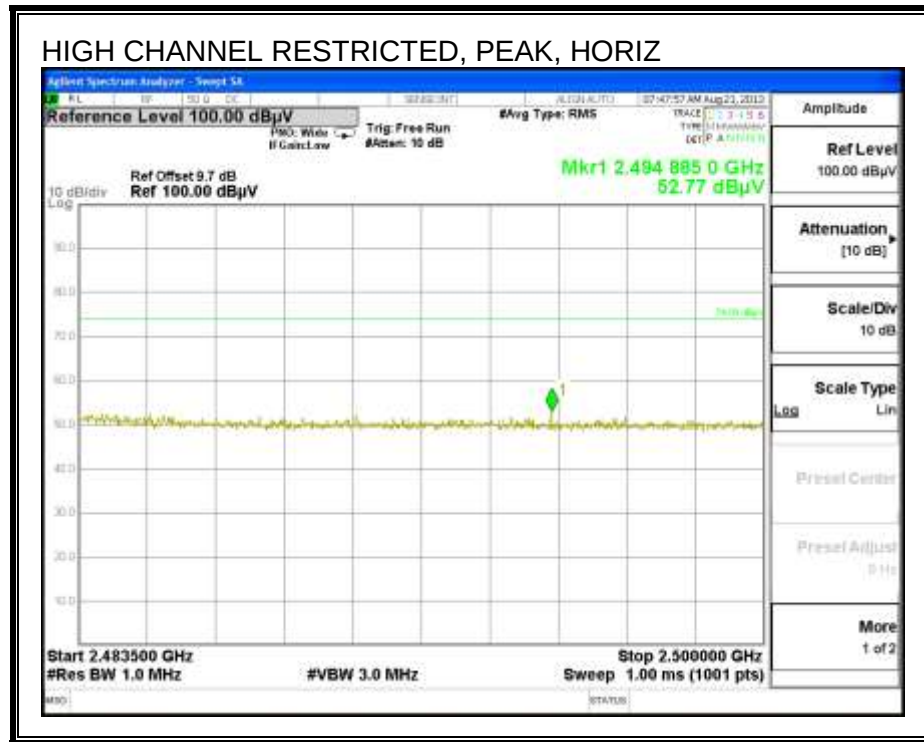


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

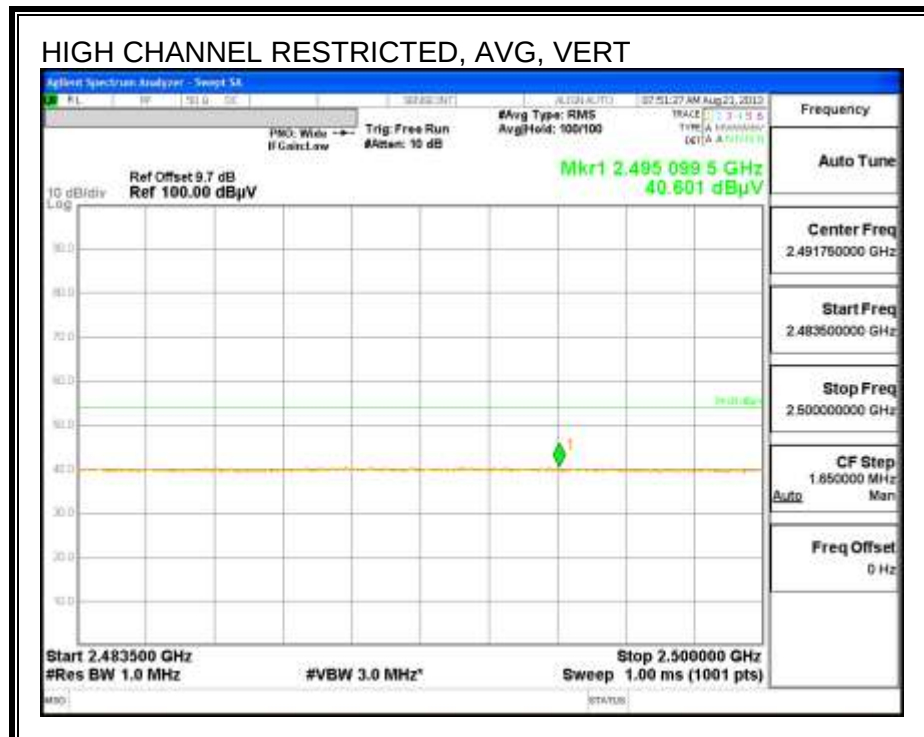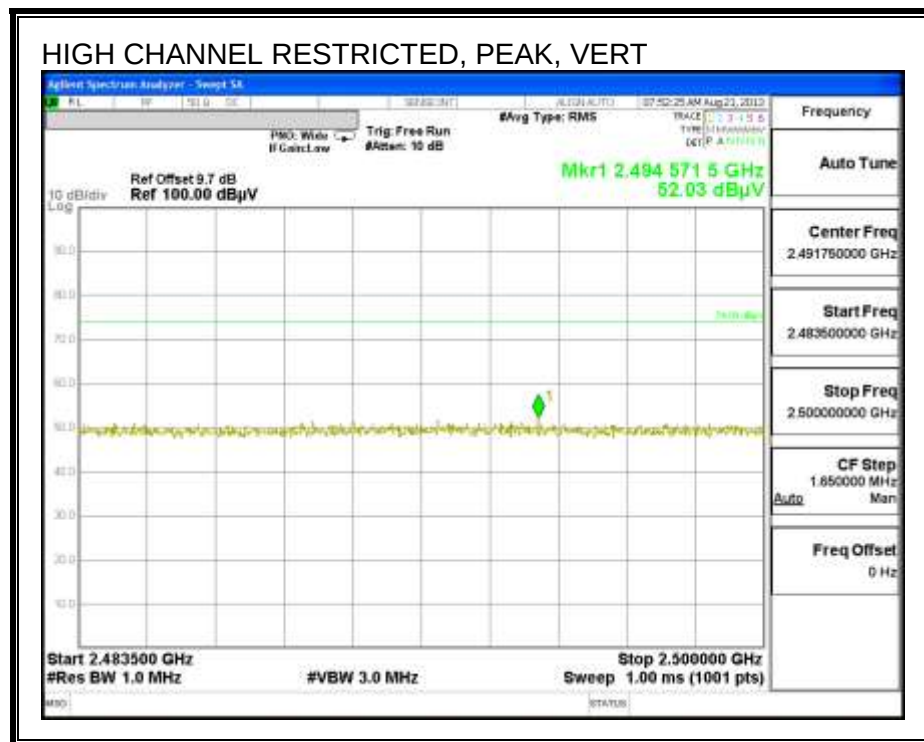


HARMONICS AND SPURIOUS EMISSIONS

LOW CH, HORIZONTAL

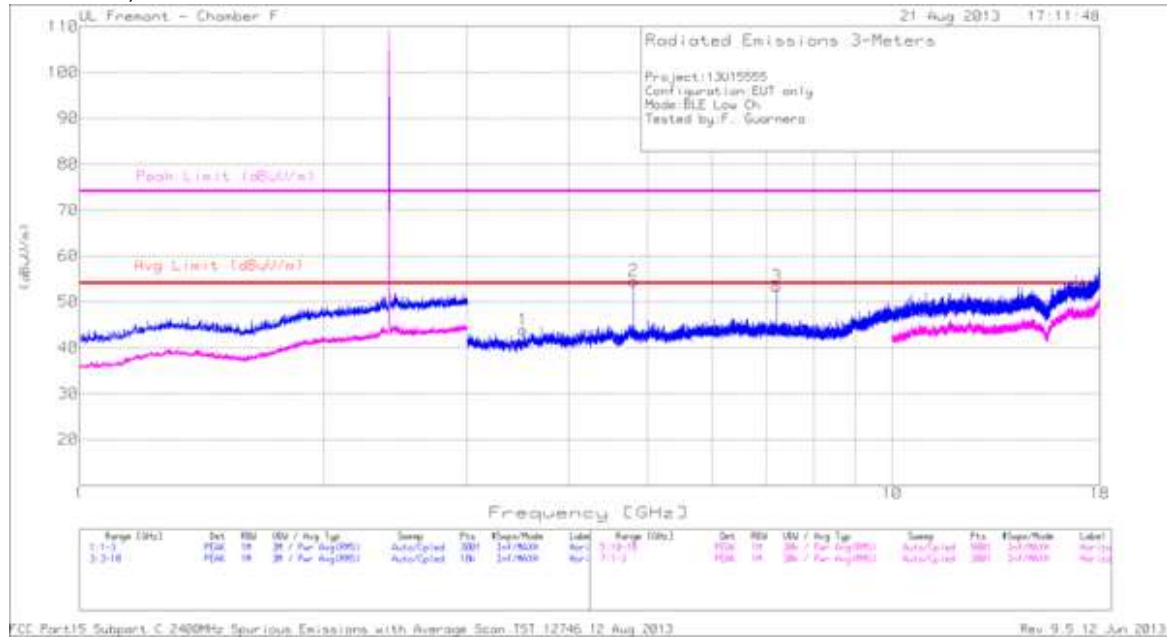

LOW CH, VERTICAL

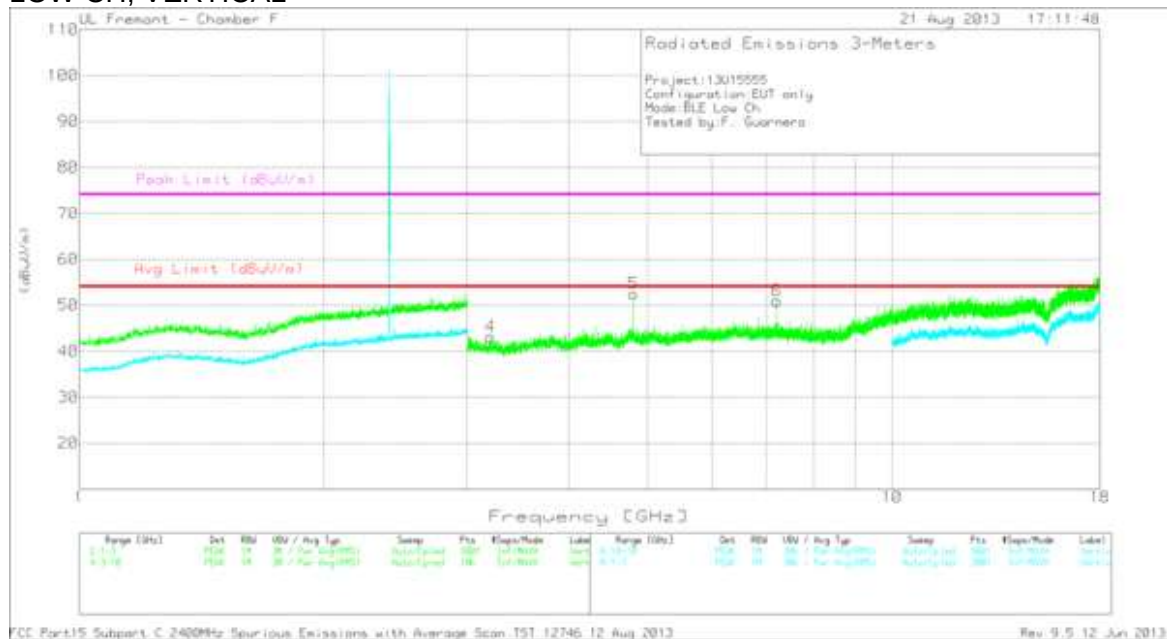


DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
*3.514	39.45	PK	33.2	-28.8	43.85					64	101	H
4.804	41.97	RMS	34.1	-27.6	48.47	53.97	-5.5	74	-25.53	75	103	H
7.206	37.75	RMS	35.7	-27	46.45	53.97	-7.52	74	-27.55	347	172	H
*3.203	39.33	PK	33.2	-29.4	43.13					72	1'00	V
4.804	40.35	RMS	34.1	-27.6	46.85	53.97	-7.12	74	-27.15	87	210	V
7.207	34.36	RMS	35.7	-27	43.06	53.97	-10.91	74	-30.94	71	152	V


*Not in Restricted Band

HARMONICS AND SPURIOUS EMISSIONS

MID CH, HORIZONTAL

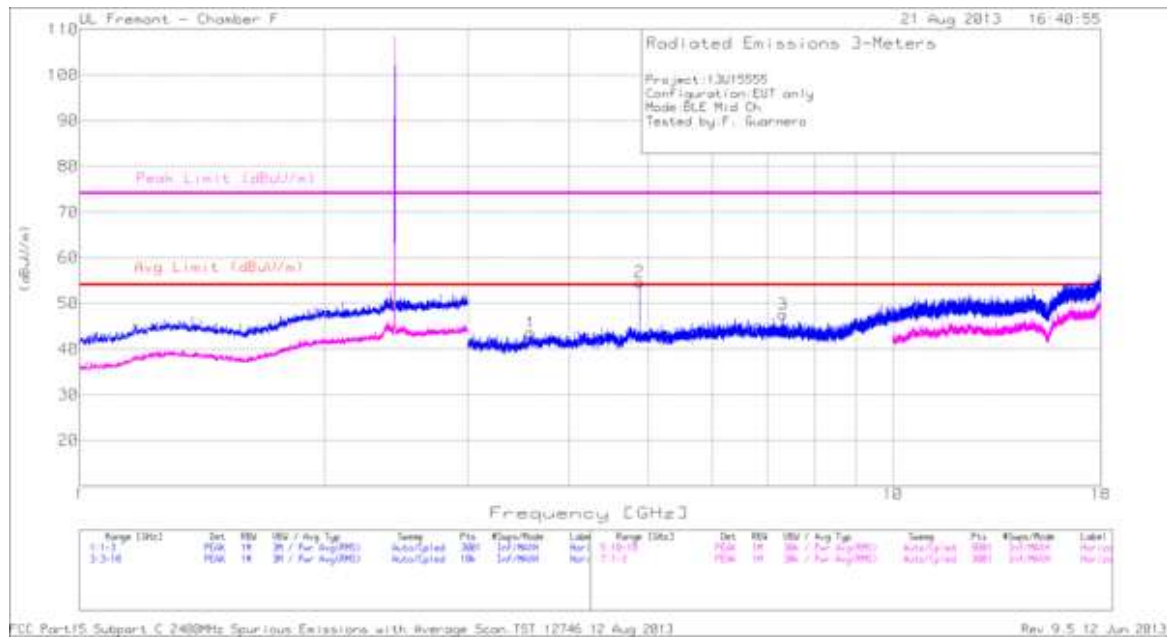

MID CH, VERTICAL

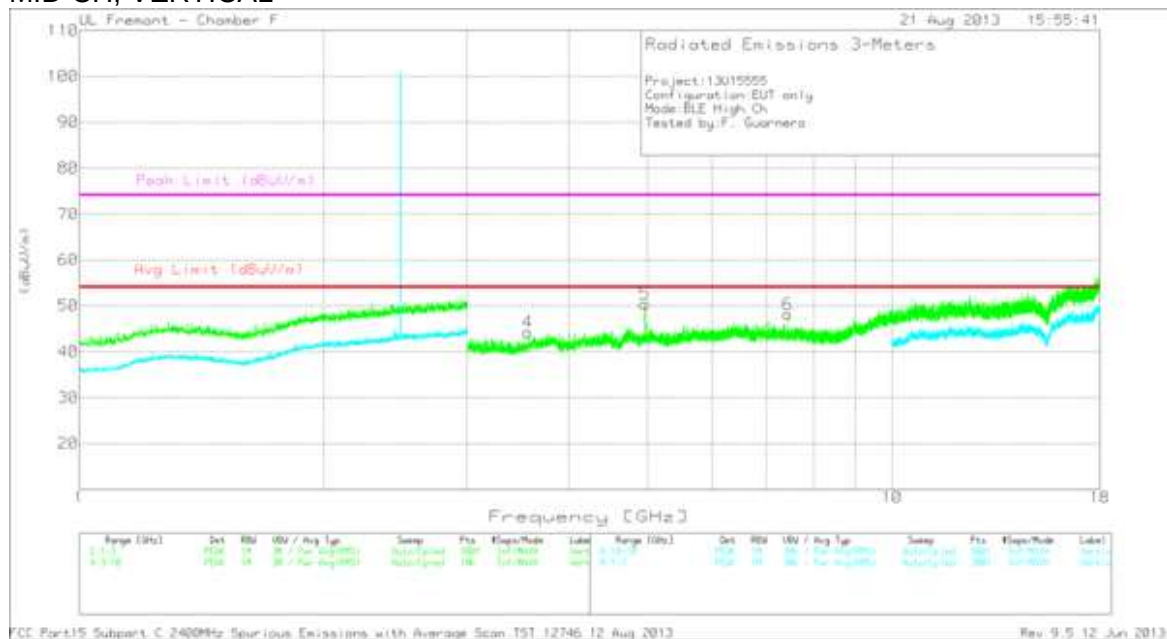


DATA

(GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin Frequency (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
*3.585	38.74	PK	33.7	-28.9	43.54					256	100	H
4.88	44.45	RMS	34	-28.4	50.05	53.97	-3.92	74	-23.95	342	102	H
7.321	39.32	PK	35.7	-27.4	47.62	53.97	-6.35	74	-26.38	79	199	H
*3.139	39.98	PK	33.3	-30	43.28					137	100	V
4.88	40.28	RMS	34	-28.4	45.88	53.97	-8.09	74	-28.12	103	225	V
*6.613	37.47	PK	35.8	-26.6	46.67					122	100	V


*Not in Restricted Band

HARMONICS AND SPURIOUS EMISSIONS

HIGH CH, HORIZONTAL

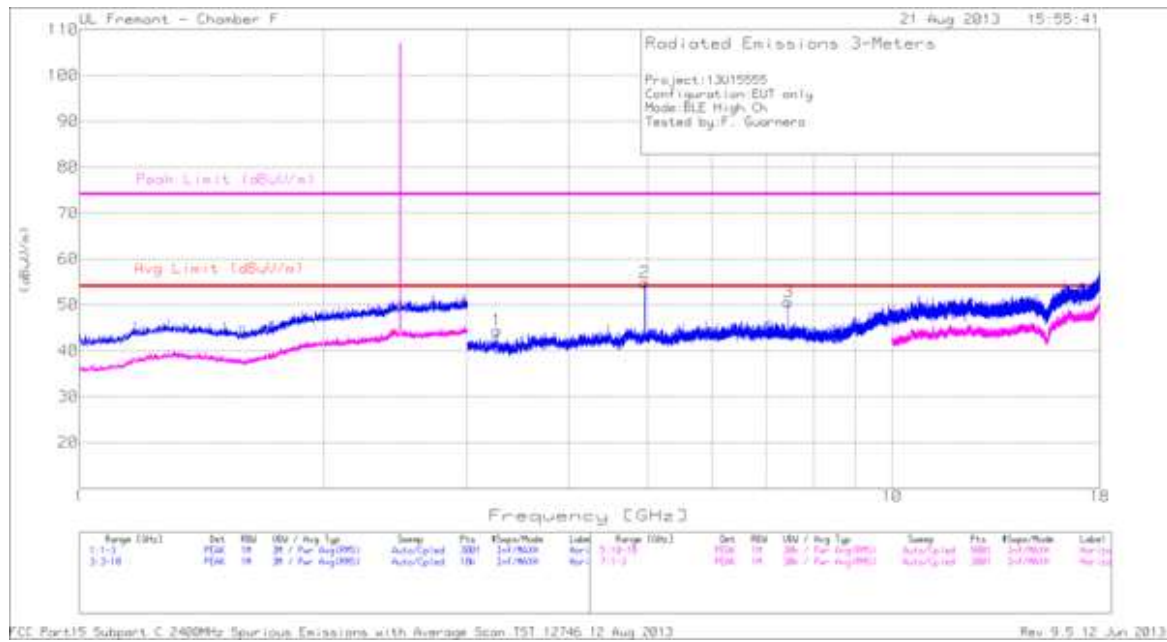

HIGH CH, VERTICAL

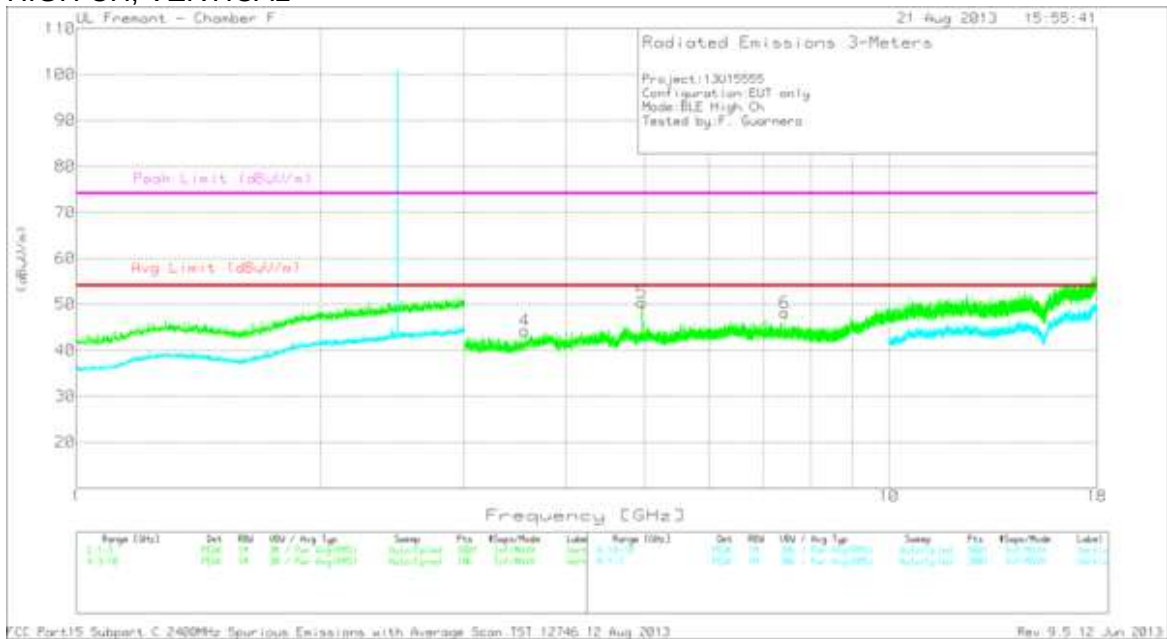


DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.263	40.31	PK	33.1	-29	44.41	53.97	-9.56	74	-29.59	0-360	201	H
4.96	44.11	RMS	34	-29.2	48.91	53.97	-5.06	74	-25.09	18	101	H
7.439	36.8	RMS	35.8	-27.3	45.3	53.97	-8.67	74	-28.7	44	197	H
*3.564	39.53	PK	33.5	-28.8	44.23					0-360	100	V
4.96	43.01	RMS	34	-29.2	47.81	53.97	-6.16	74	-26.19	24	171	V
7.439	33.82	RMS	35.8	-27.3	42.32	53.97	-11.65	74	-31.68	45	333	V

*Not in Restricted Band

9.3. WORST-CASE ABOVE 18 GHz


SPURIOUS EMISSIONS 18 TO 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

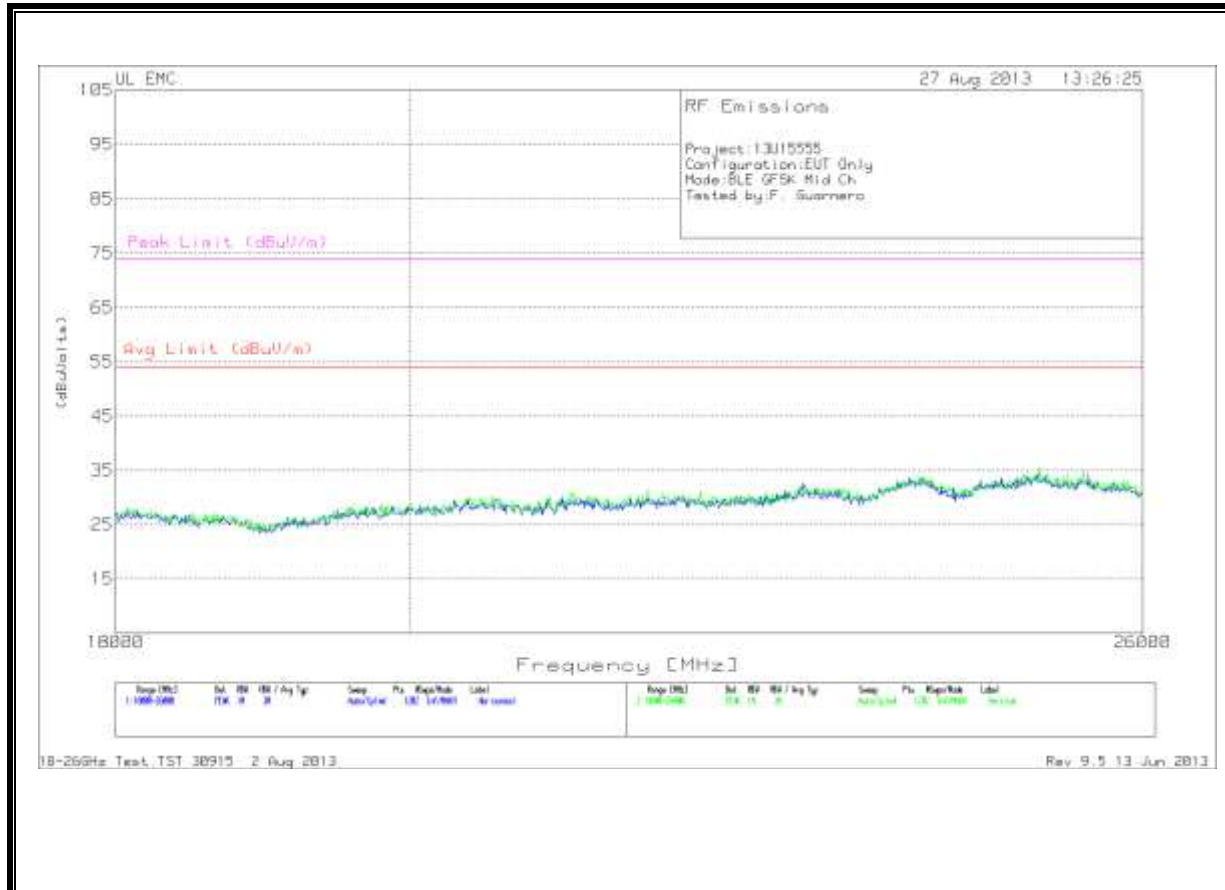

9.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

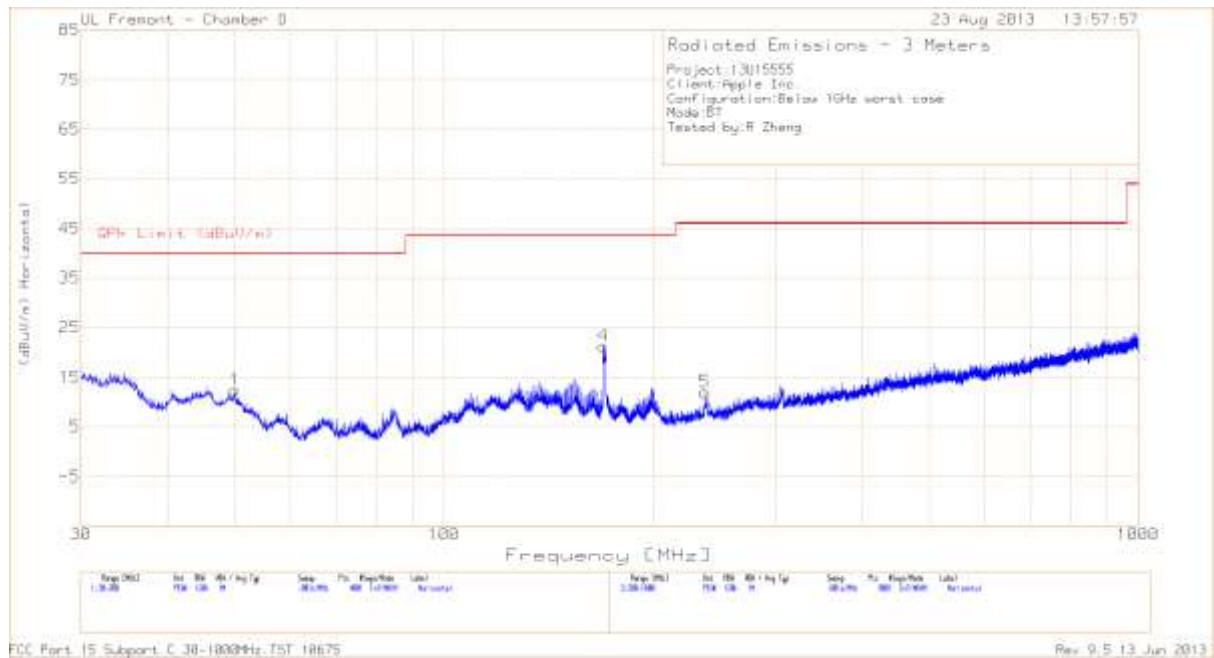

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
1	49.975	36.49	PK	7.9	-31.9	12.49	40	-27.51	399	H
4	169.6125	40.91	PK	11.7	-31.3	21.31	43.52	-22.21	98	H
2	50.0175	47.67	PK	7.9	-31.9	23.67	40	-16.33	100	V
3	169.655	32.02	PK	11.7	-31.3	12.42	43.52	-31.1	100	V
5	237.4	31.64	PK	11.4	-31	12.04	46.02	-33.98	100	H
6	305.3	31.12	PK	13.3	-30.7	13.72	46.02	-32.3	299	V

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

RESULTS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.177	52.59	PK	.1	0	52.69	64.6	-11.91	-	-
2	.177	32.86	Av	.1	0	32.96	-	-	54.6	-21.64
3	.4425	46.78	PK	.1	0	46.88	57	-10.12	-	-
4	.4425	26.14	Av	.1	0	26.24	-	-	47	-20.76
5	.87	45.8	PK	.1	0	45.9	56	-10.1	-	-
6	.87	23.12	Av	.1	0	23.22	-	-	46	-22.78
7	.96	45.95	PK	.1	0	46.05	56	-9.95	-	-
8	.96	21.94	Av	.1	0	22.04	-	-	46	-23.96
9	1.2255	46.58	PK	.1	.1	46.78	56	-9.22	-	-
10	1.2255	21.61	Av	.1	.1	21.81	-	-	46	-24.19
11	1.491	45.05	PK	.1	.1	45.25	56	-10.75	-	-
12	1.491	22.67	Av	.1	.1	22.87	-	-	46	-23.13

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
13	.177	54.56	PK	.1	0	54.66	64.6	-9.94	-	-
14	.177	29.55	Av	.1	0	29.65	-	-	54.6	-24.95
15	.438	48.54	PK	.1	0	48.64	57.1	-8.46	-	-
16	.438	27.91	Av	.1	0	28.01	-	-	47.1	-19.09
17	.87	47.63	PK	.1	0	47.73	56	-8.27	-	-
18	.87	28.38	Av	.1	0	28.48	-	-	46	-17.52
19	.9555	47.18	PK	.1	0	47.28	56	-8.72	-	-
20	.9555	26.56	Av	.1	0	26.66	-	-	46	-19.34
21	1.203	49.12	PK	.1	.1	49.32	56	-6.68	-	-
22	1.203	28.09	Av	.1	.1	28.29	-	-	46	-17.71
23	1.491	46.86	PK	.1	.1	47.06	56	-8.94	-	-
24	1.491	29.46	Av	.1	.1	29.66	-	-	46	-16.34

LINE 2 RESULTS

