



FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8

CERTIFICATION TEST REPORT

FOR

Tablet with cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA /CDMA 1xRTT
/1x Advanced/EV-DO Rev 0, A, B/LTE/IEEE 802.11a/b/g/n (MIMO 2x2) and
Bluetooth radio

Model: A1490

FCC ID: BCGA1490
IC: 579C-A1490

REPORT NUMBER: 13U15668-4

ISSUE DATE: SEPTEMBER 13, 2013

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	09/13/13	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	12
7.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>12</i>
7.2. <i>MEASUREMENT METHODS</i>	<i>12</i>
7.3. <i>DUTY CYCLE PLOTS</i>	<i>13</i>
8. ANTENNA PORT TEST RESULTS	14
8.1. <i>6 dB BANDWIDTH.....</i>	<i>14</i>
8.2. <i>99% BANDWIDTH.....</i>	<i>17</i>
8.3. <i>OUTPUT POWER</i>	<i>20</i>
8.4. <i>AVERAGE POWER.....</i>	<i>23</i>
8.5. <i>POWER SPECTRAL DENSITY.....</i>	<i>24</i>
8.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>27</i>
9. RADIATED TEST RESULTS.....	31
9.1. <i>LIMITS AND PROCEDURE</i>	<i>31</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>32</i>
9.3. <i>WORST-CASE ABOVE 18 GHz</i>	<i>42</i>
9.4. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>43</i>
10. AC POWER LINE CONDUCTED EMISSIONS	45
11. SETUP PHOTOS.....	50

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: Tablet with cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA1xRTT/1x Advanced/EV-DO Rev 0, A, B/LTE/IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio

MODEL: A1490

SERIAL NUMBER: DLXL2008FW7N

DATE TESTED: AUGUST 21-29, 2013 & SEPTEMBER 5, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Tested By:



Thu Chan
WiSE Operations Manager
UL Verification Services Inc.

Oliver Su
WiSE Technician
UL Verification Services Inc

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPad Model A1475 is a Tablet with cellular GSM/GPRS/EGPRS/WCDMA/HSPA+ DC-HSDPA/ CDMA 1xRTT/1x Advanced/EV-DO Rev 0, A, B/LTE/IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	8.463	7.02

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain of 0.81dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Broadcom Bluetool Version 1.5.6.2.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated with AC adapter and Headset, and the worst case was found to be at X position without AC adapter and headset.

The worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was including headset and AC charger.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Apple	A1357	A/12981EA	DoC
Earphone	Apple	NA	NA	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.1m	To Spectrum Analyzer


I/O CABLES (RADIATED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Audio	1	Jack	Un-Shielded	0.5m	NA


I/O CABLES (AC POWER CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115	Un-Shielded	2m	NA
2	DC	1	USB	Un-Shielded	2m	NA
3	Audio	1	Jack	Un-Shielded	0.5m	NA


SETUP DIAGRAM FOR CONDUCTED TESTS

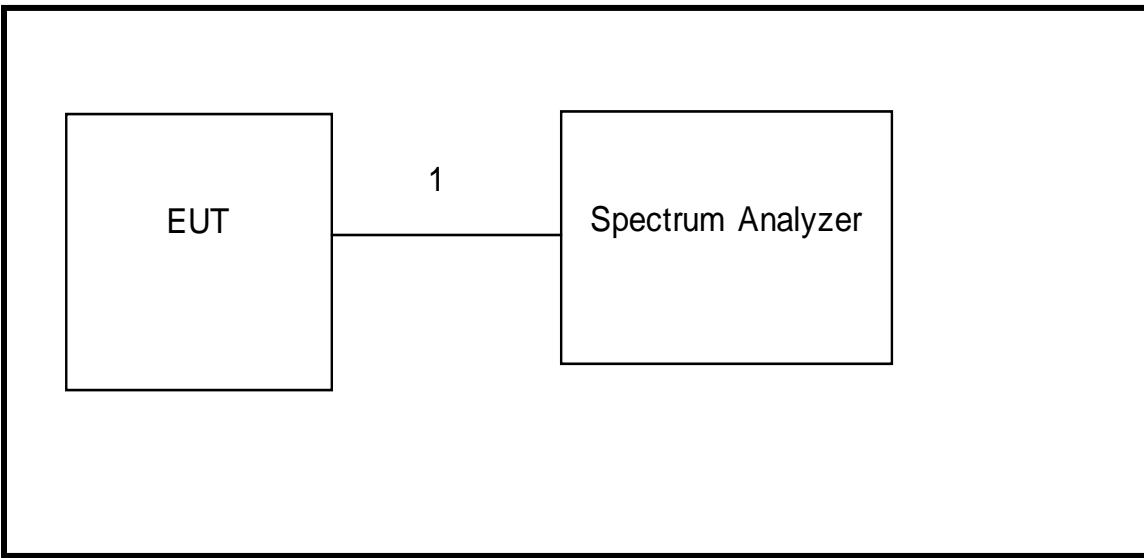

SETUP DIAGRAM FOR RADIATED TESTS

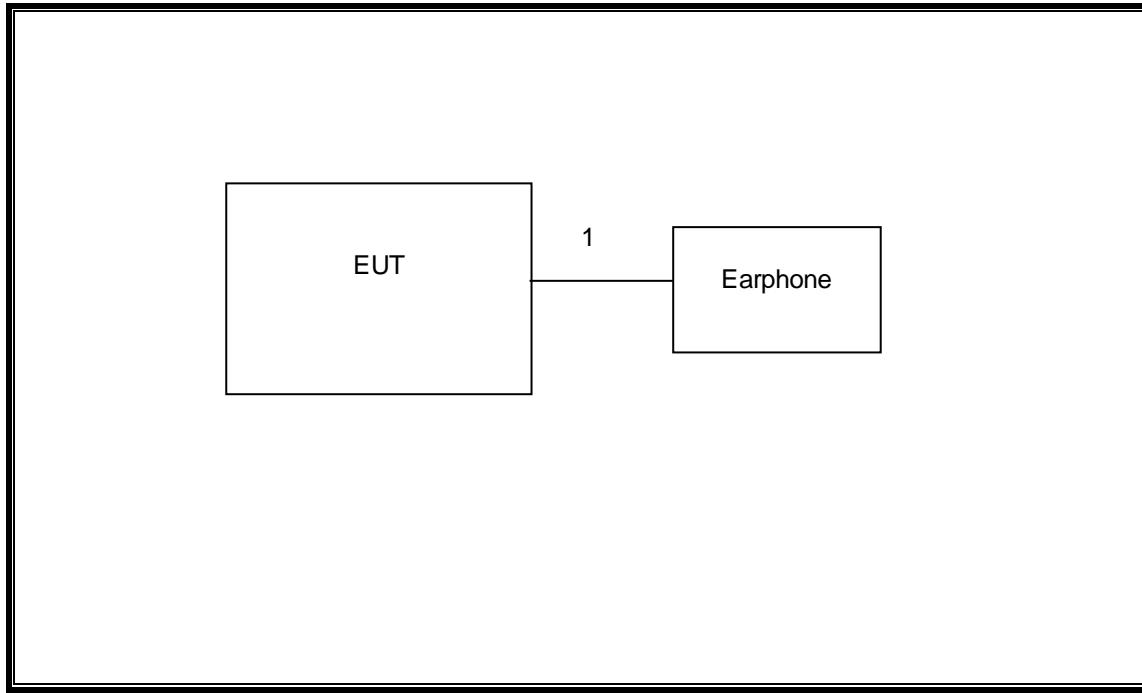

SETUP DIAGRAM FOR BELOW 1GHz & AC POWER CONDUCTED TESTS

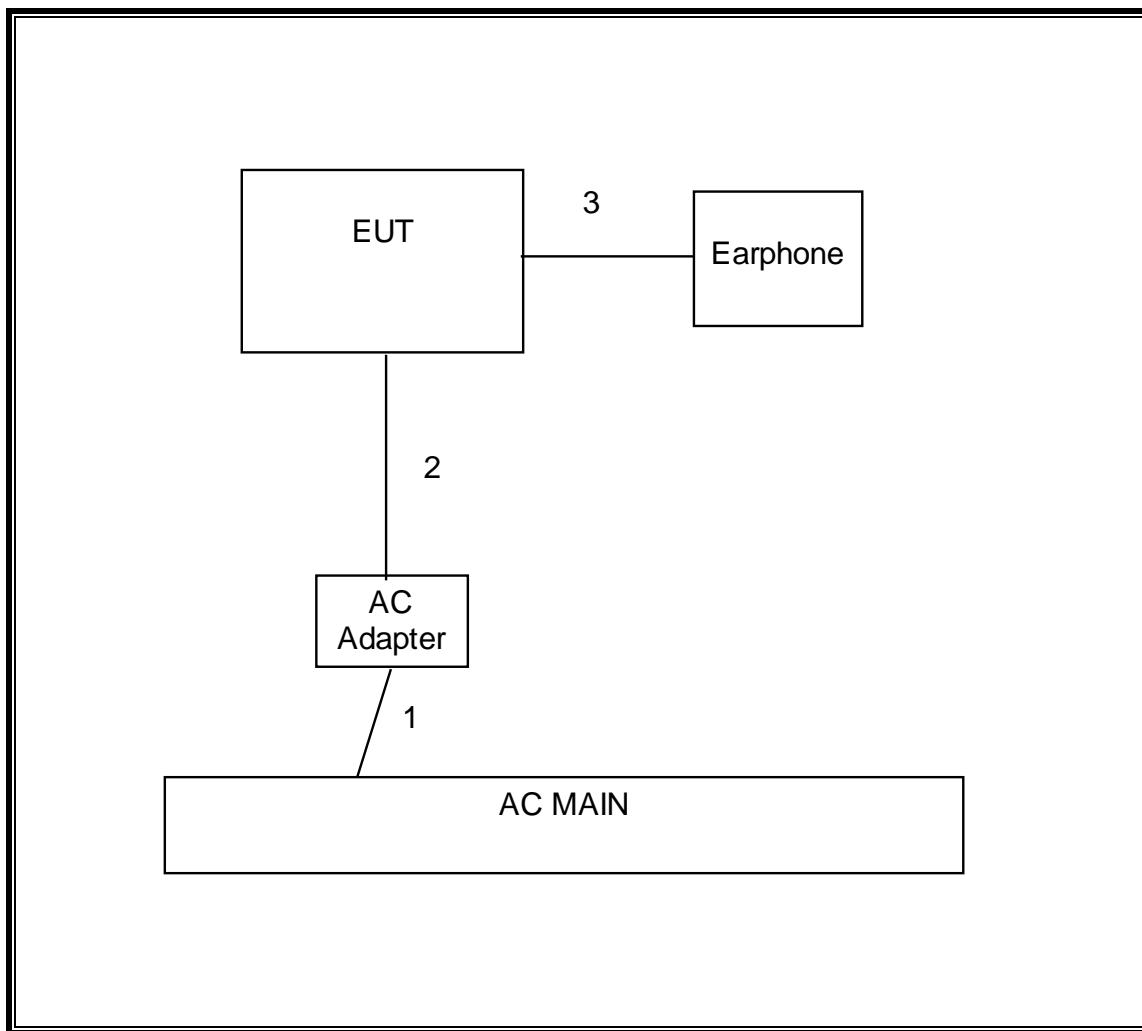

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	ETS Lindgren	3117	F00131	02/19/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	04/28/14
Peak / Average Power Sensor	Agilent / HP	N1911A	F00153	04/05/14
Peak Power Meter	Agilent / HP	E9323A	F00025	04/03/14
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00126	02/22/14
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	F00168	03/07/14
Preamplifier, 1300 MHz	Sonoma	310	F00008	11/06/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	F00165	03/18/14
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESHS20	N02396	08/15/14
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	04/17/14

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
BLE 2441MHZ	2.838	3.750	0.757	75.7%	1.210	0.352

7.2. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01.


Output Power: KDB 558074 D01.

Power Spectral Density: KDB 558074 D01.

Out-of-band emissions in non-restricted bands: KDB 558074 D01.

Out-of-band emissions in restricted bands: KDB 558074 D01.

7.3. DUTY CYCLE PLOTS

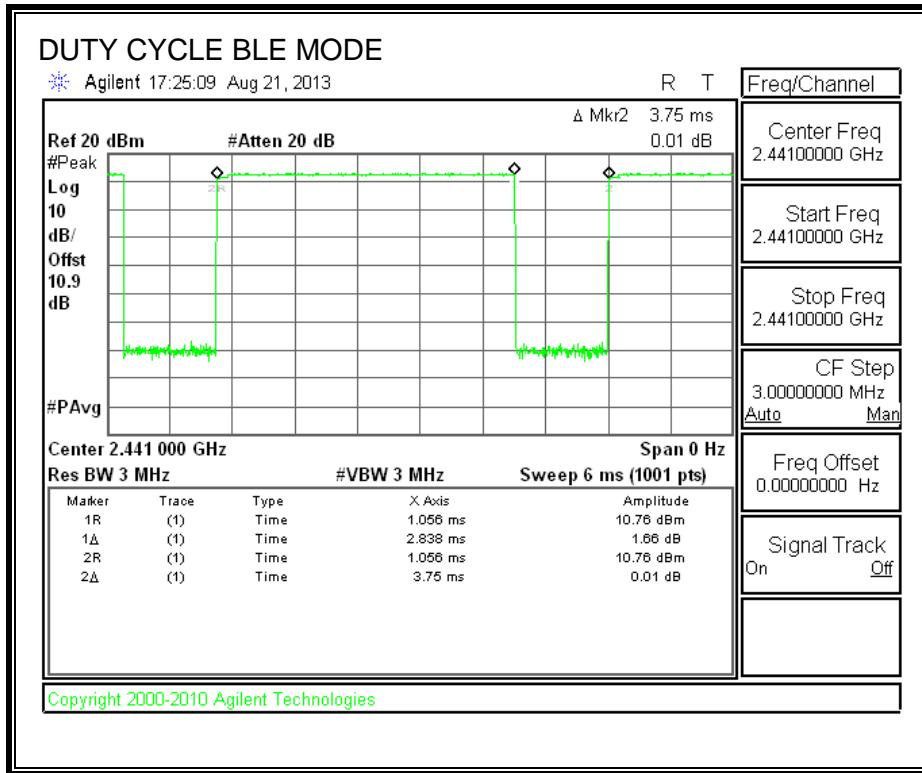

8. ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.7130	0.5
Middle	2440	0.7120	0.5
High	2480	0.7120	0.5

6 dB BANDWIDTH

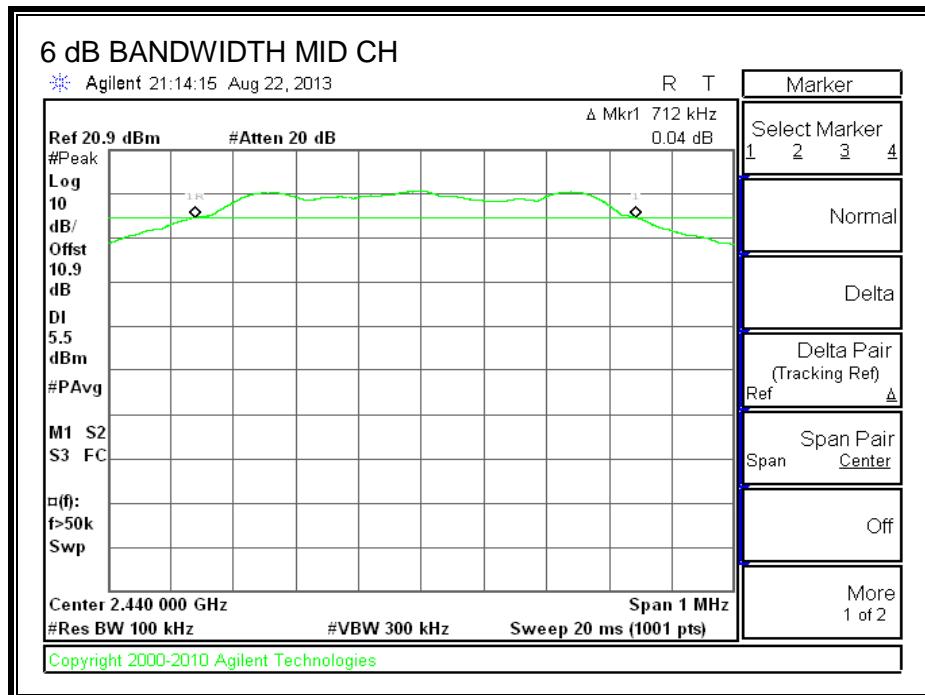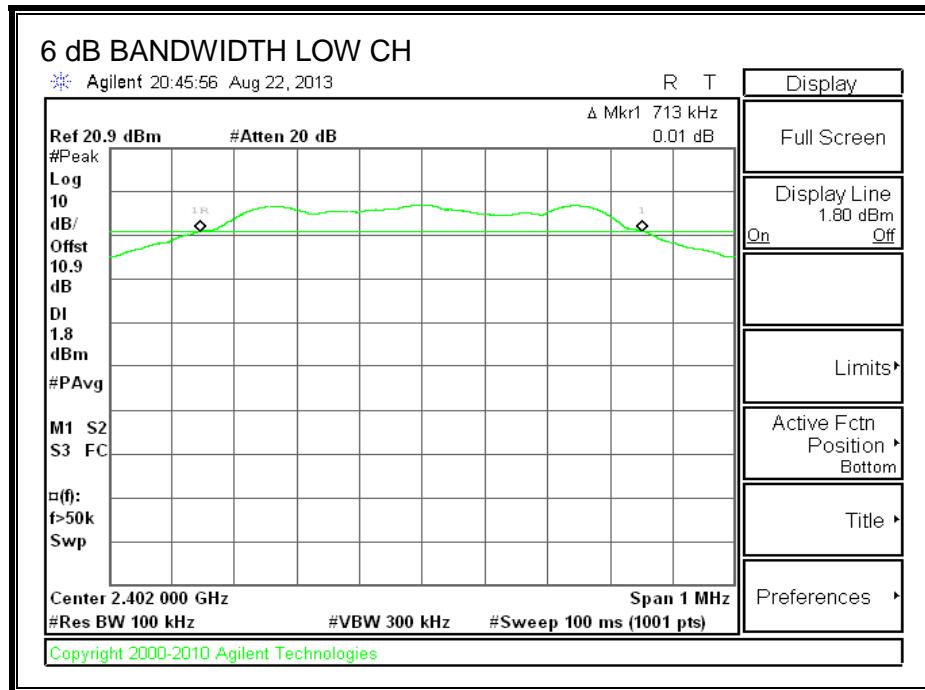

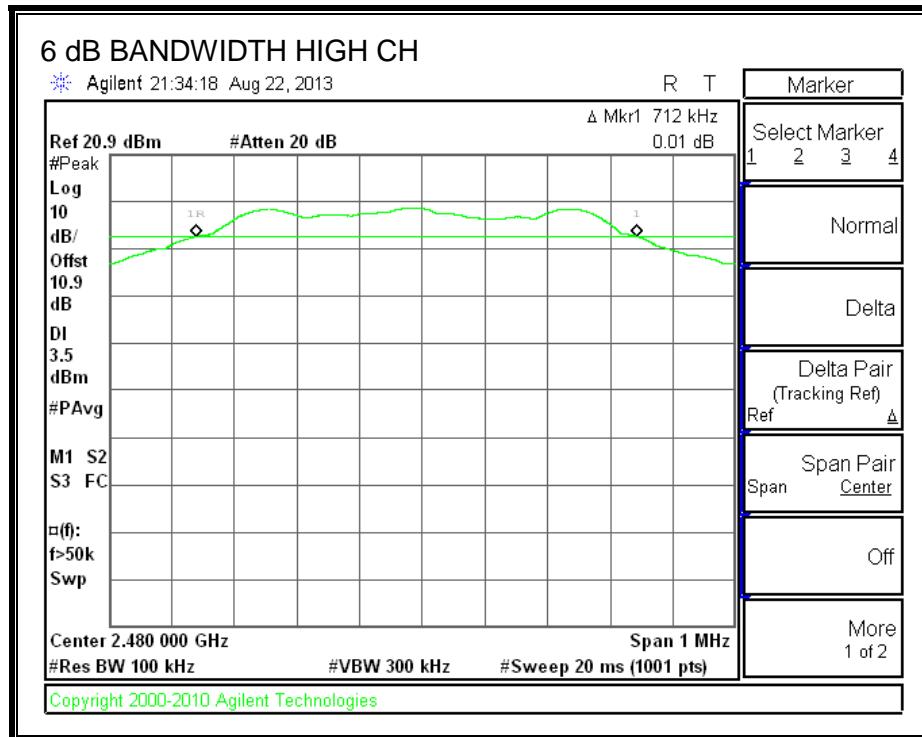

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0265
Middle	2440	1.0541
High	2480	1.0585

99% BANDWIDTH

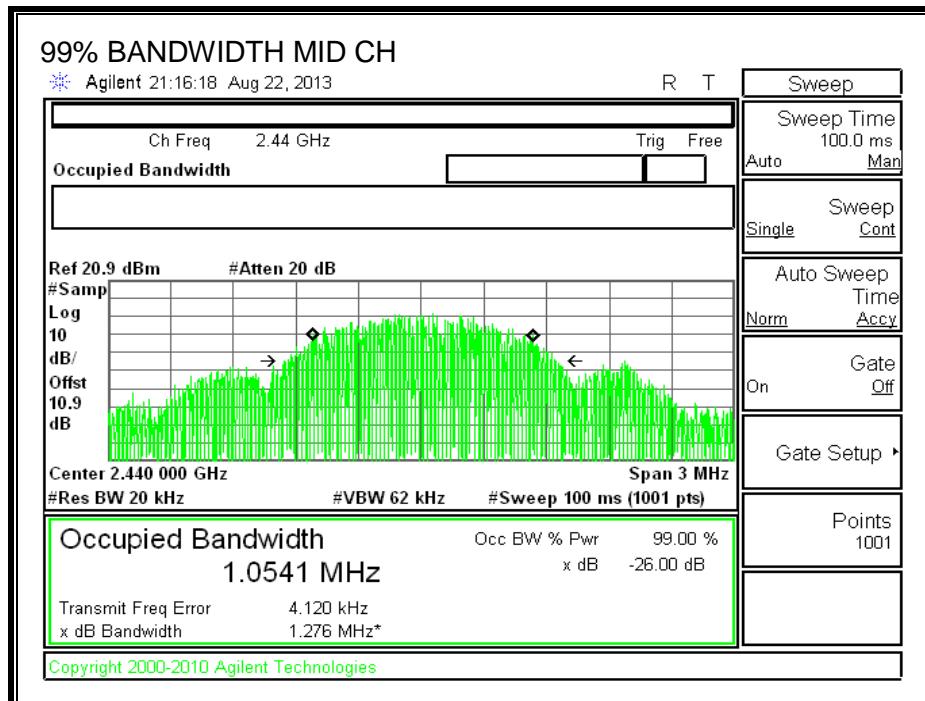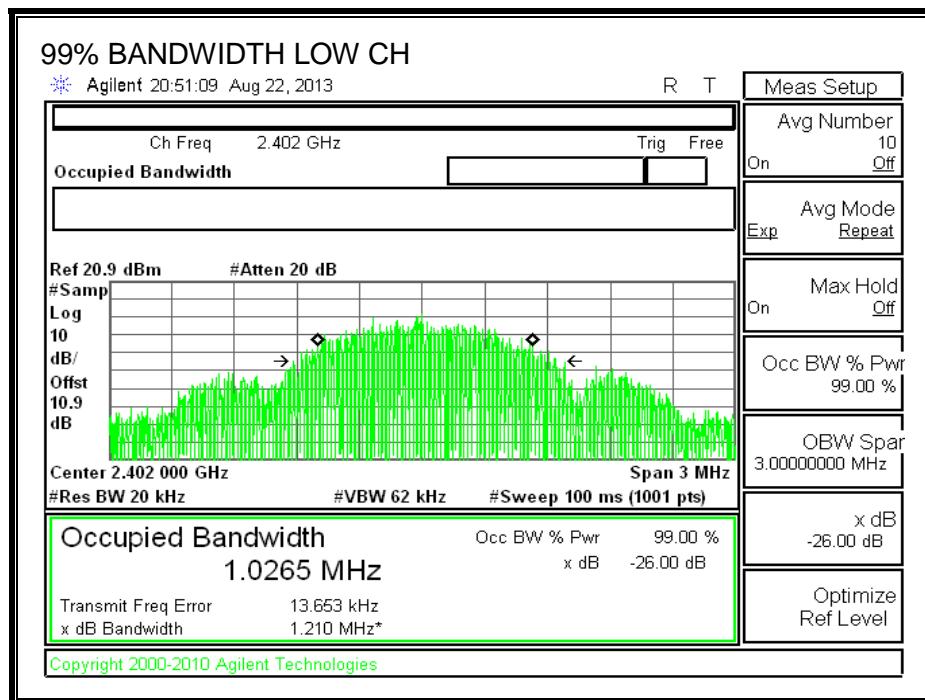

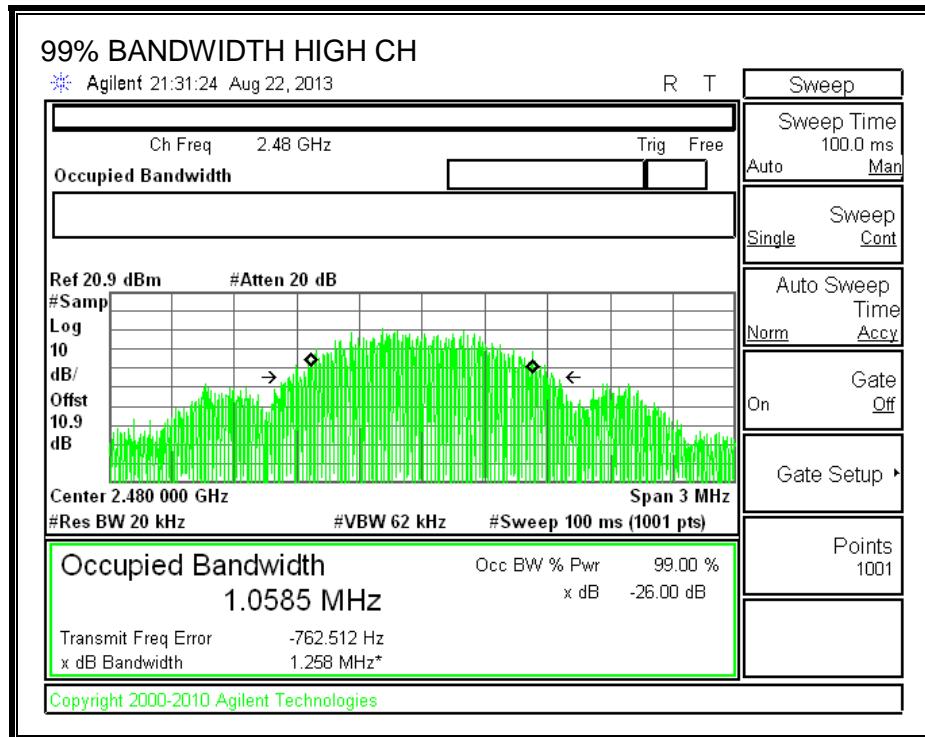

8.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


KDB 558074 D01 v02 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	7.106	30	-22.894
Middle	2440	8.463	30	-21.537
High	2480	6.137	30	-23.863

OUTPUT POWER

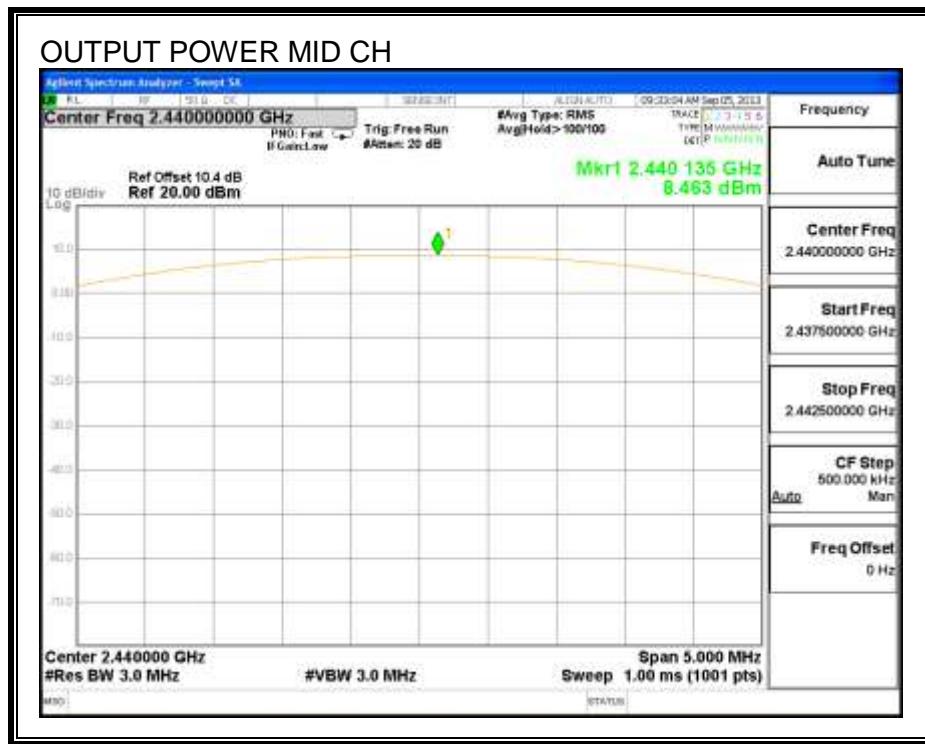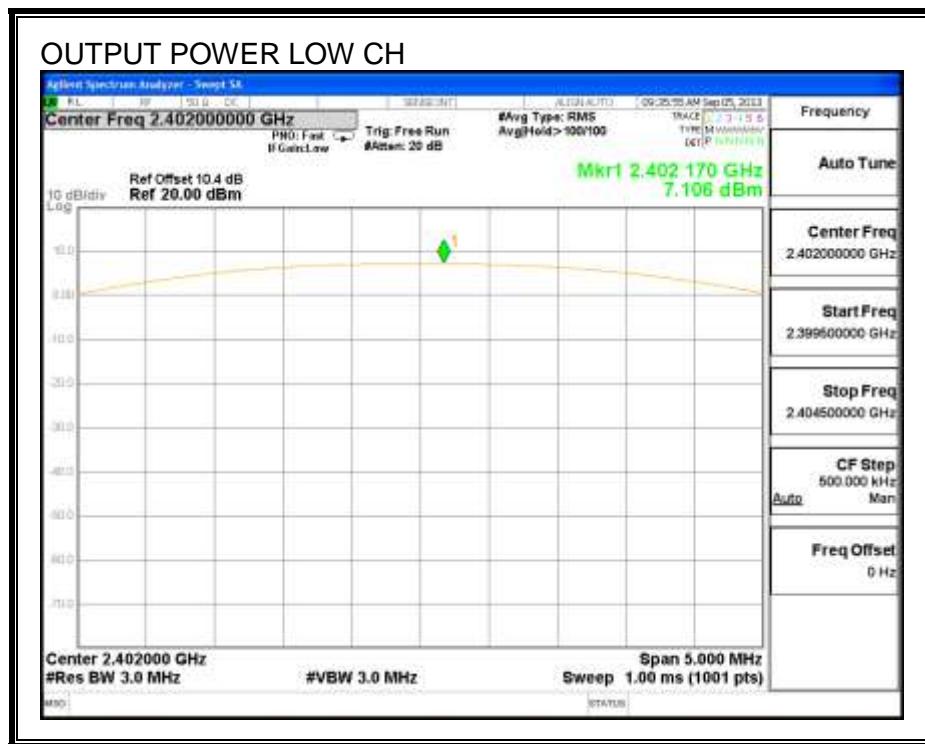

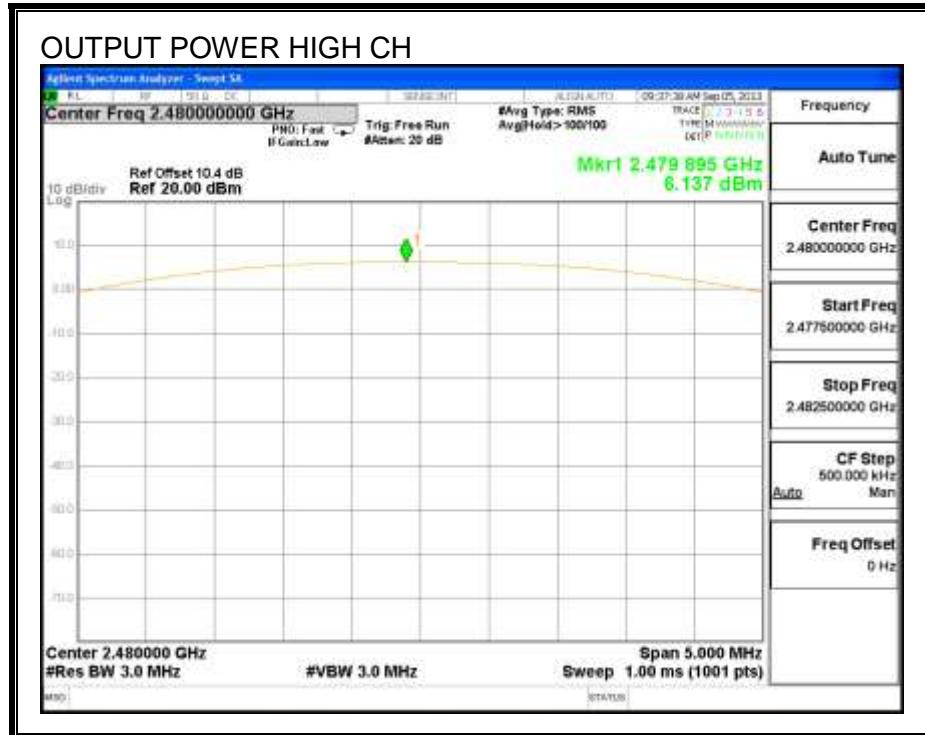

8.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.9 dB (including 10 dB pad and 0.9 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	6.92
Middle	2440	8.00
High	2480	5.92

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


KDB 558074 D01 v02 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-5.53	8	-13.53
Middle	2440	-1.75	8	-9.75
High	2480	-3.70	8	-11.70

POWER SPECTRAL DENSITY

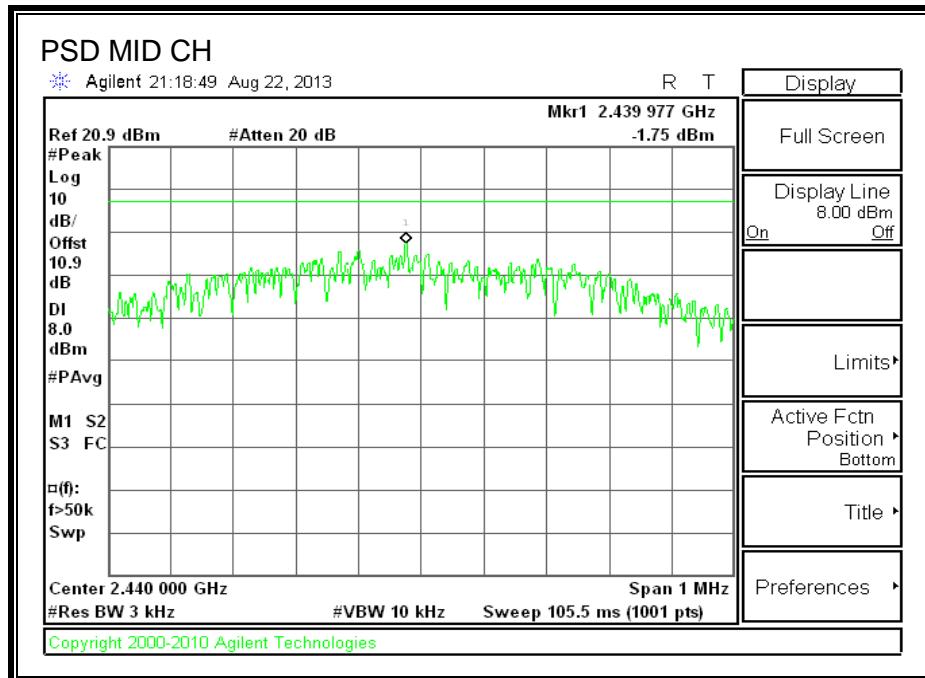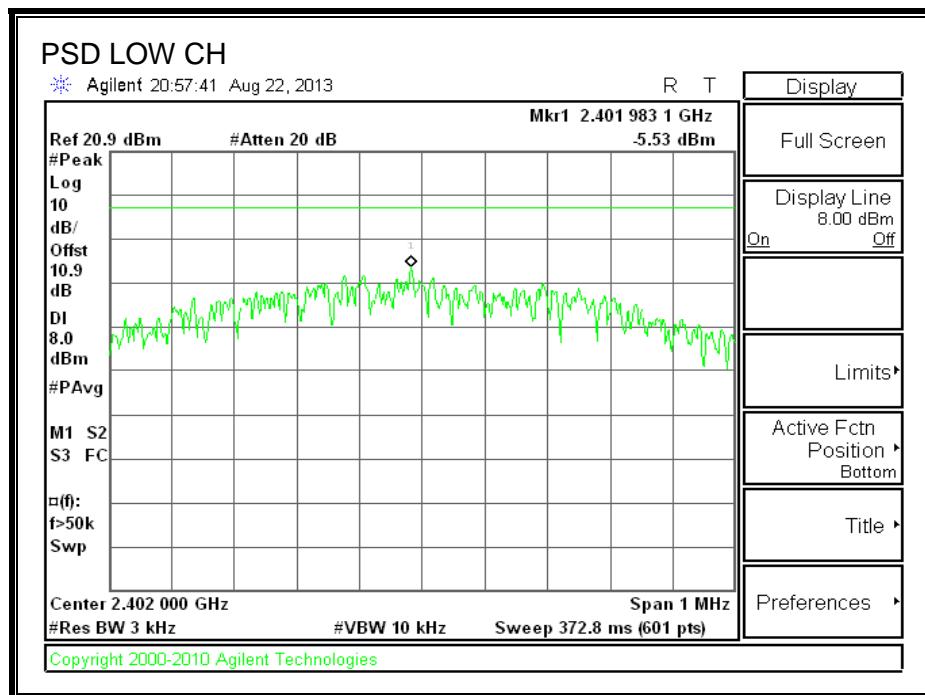

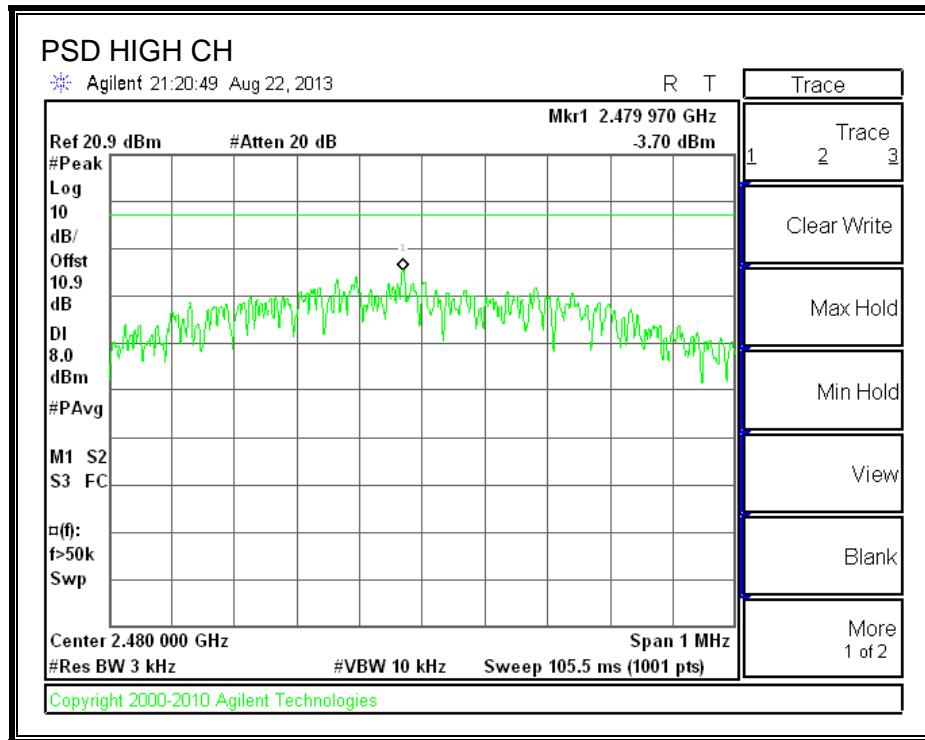

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

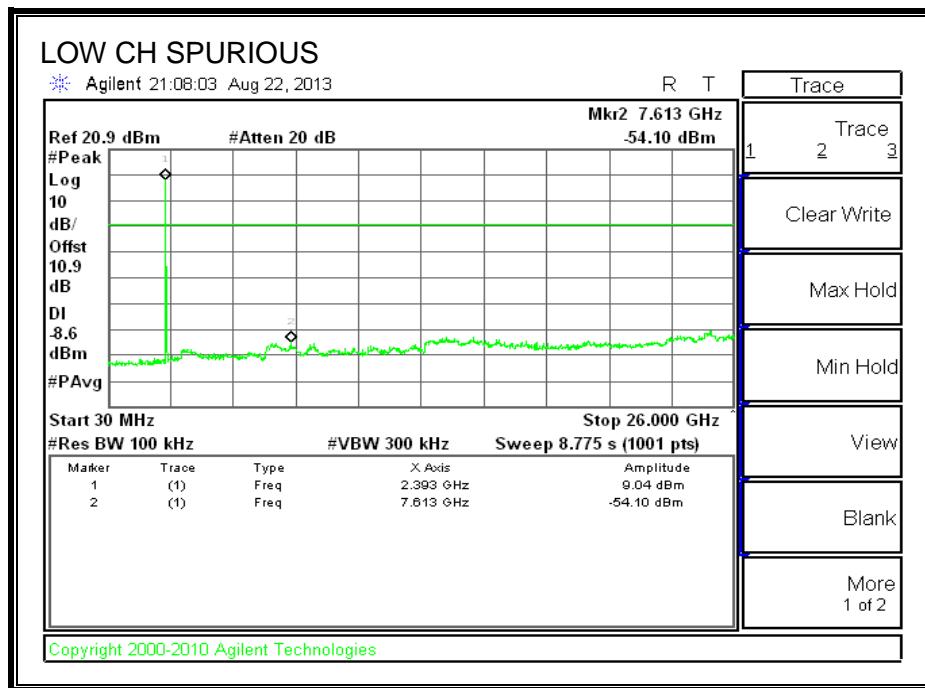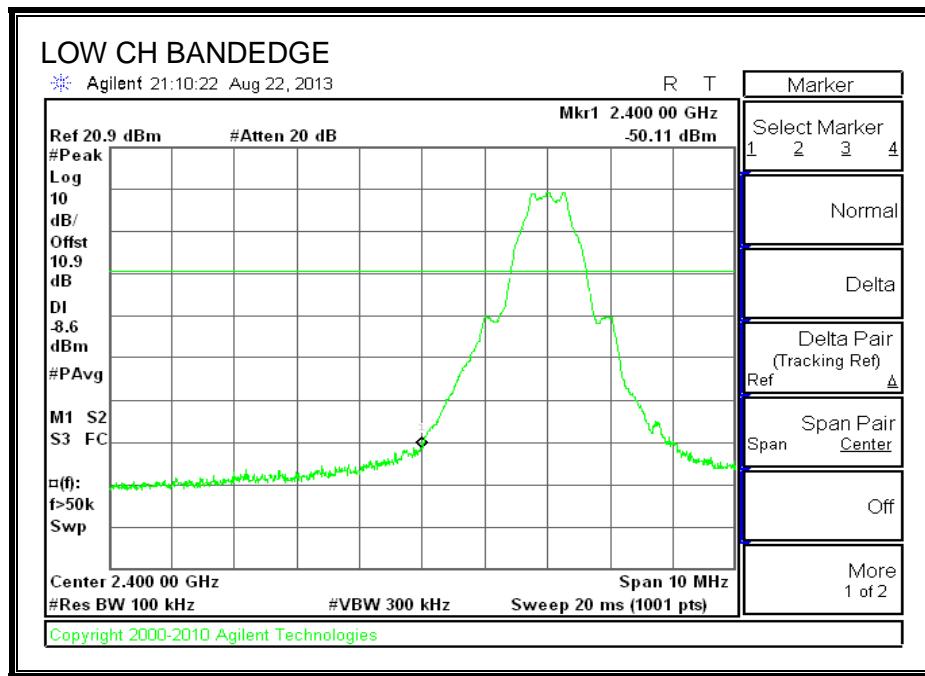

SPURIOUS EMISSIONS, MID CHANNEL

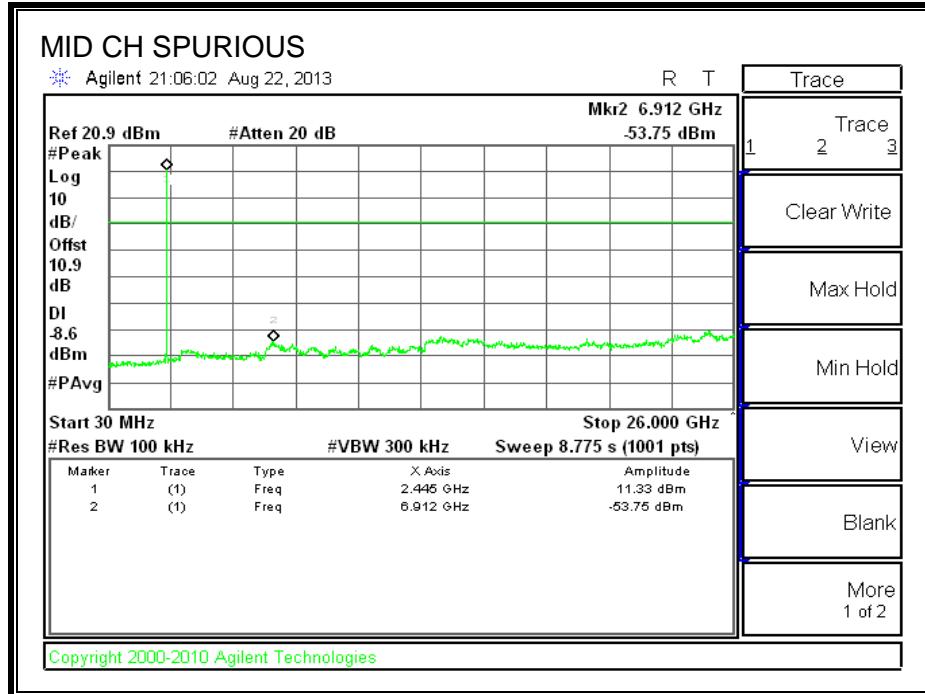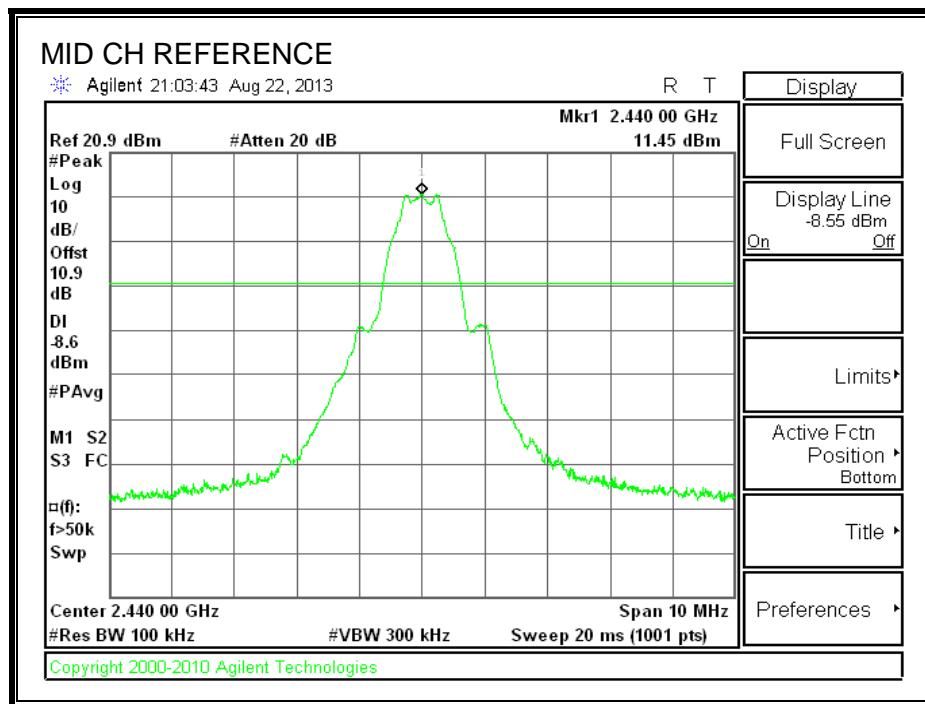

SPURIOUS EMISSIONS, HIGH CHANNEL

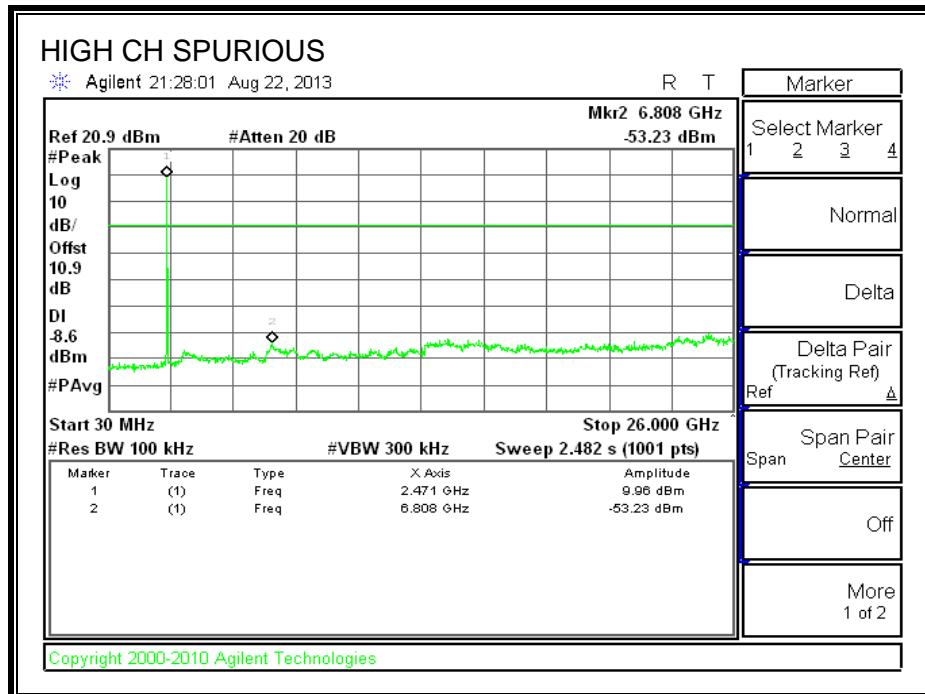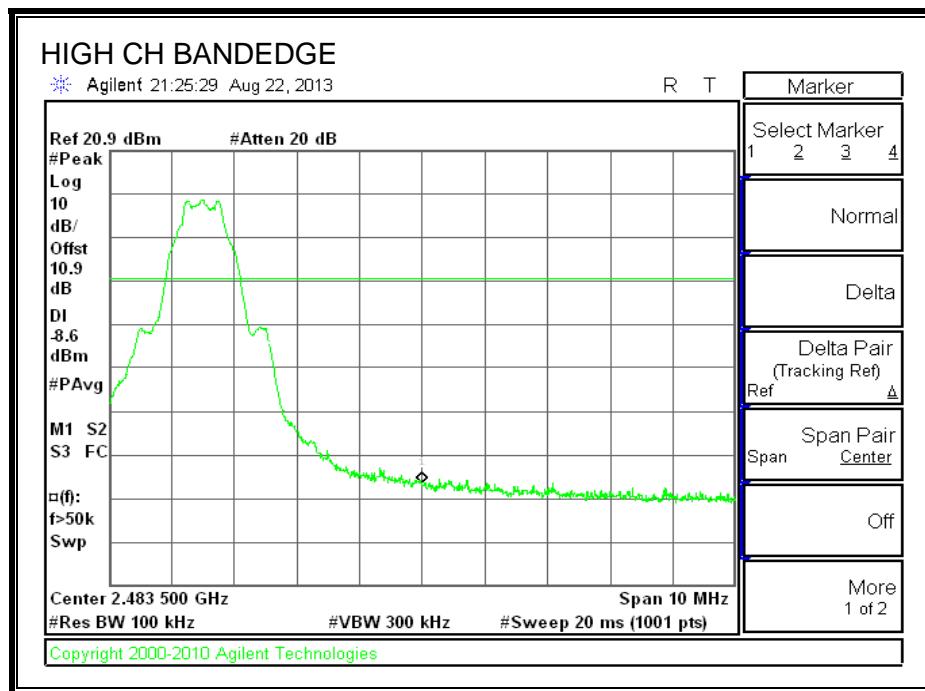

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

For 2.4 GHz band, the spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

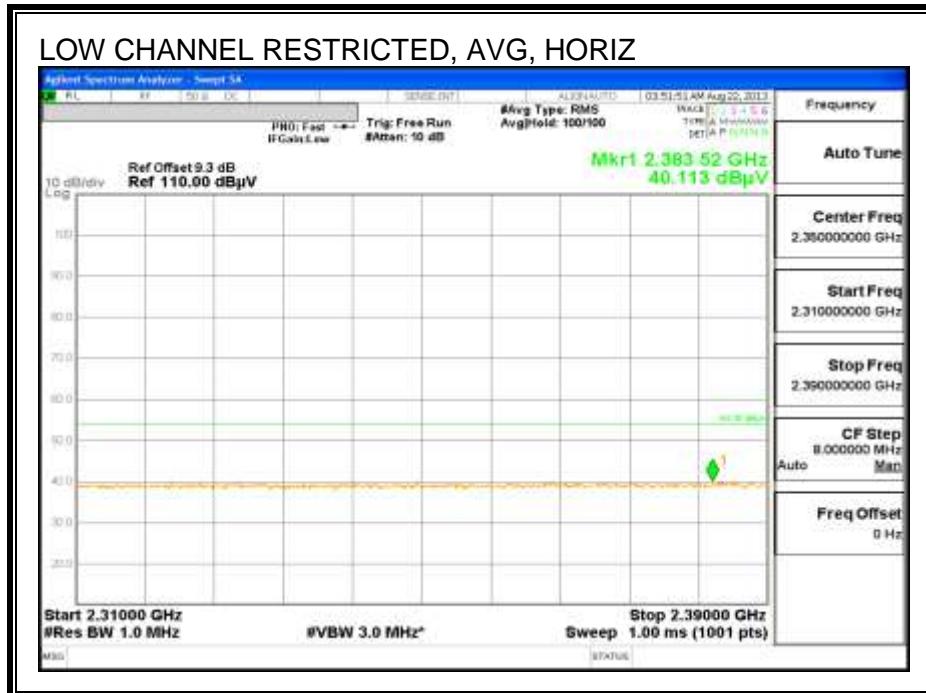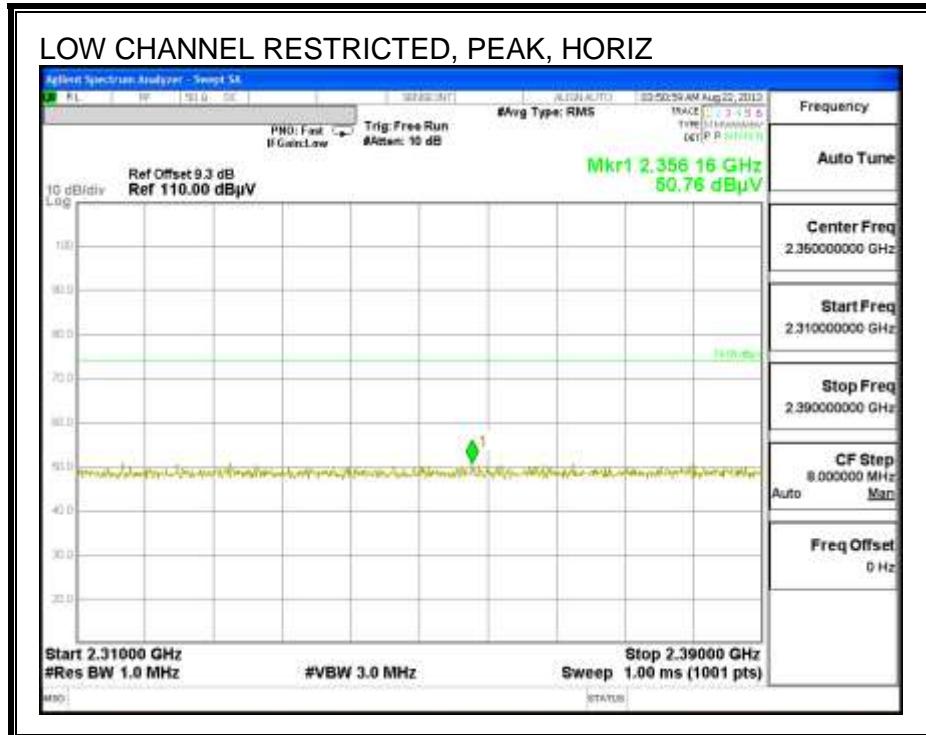



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

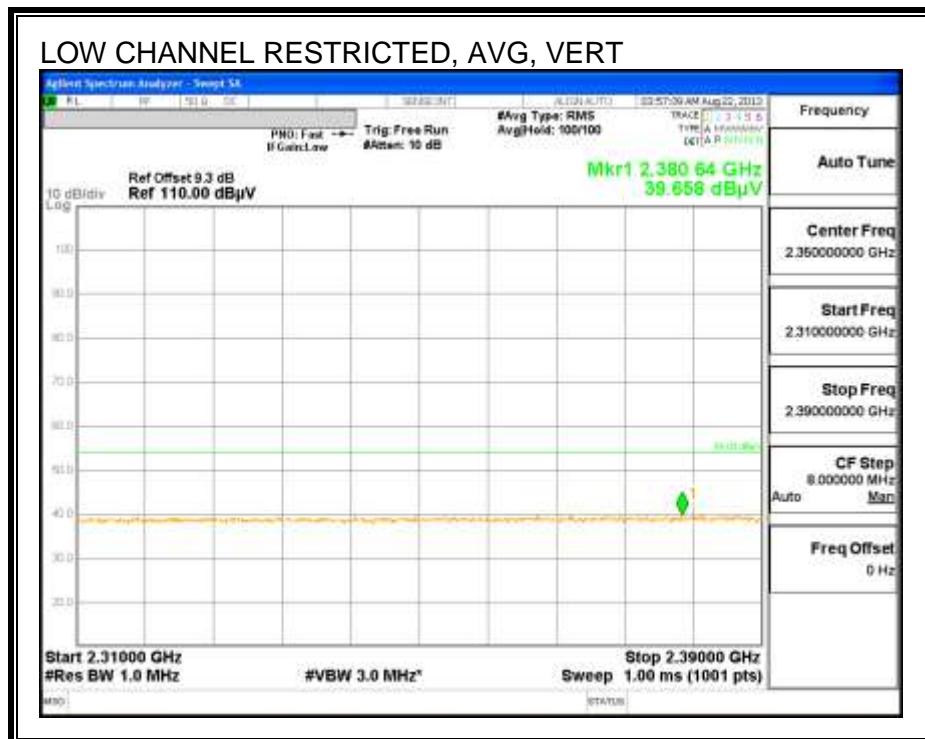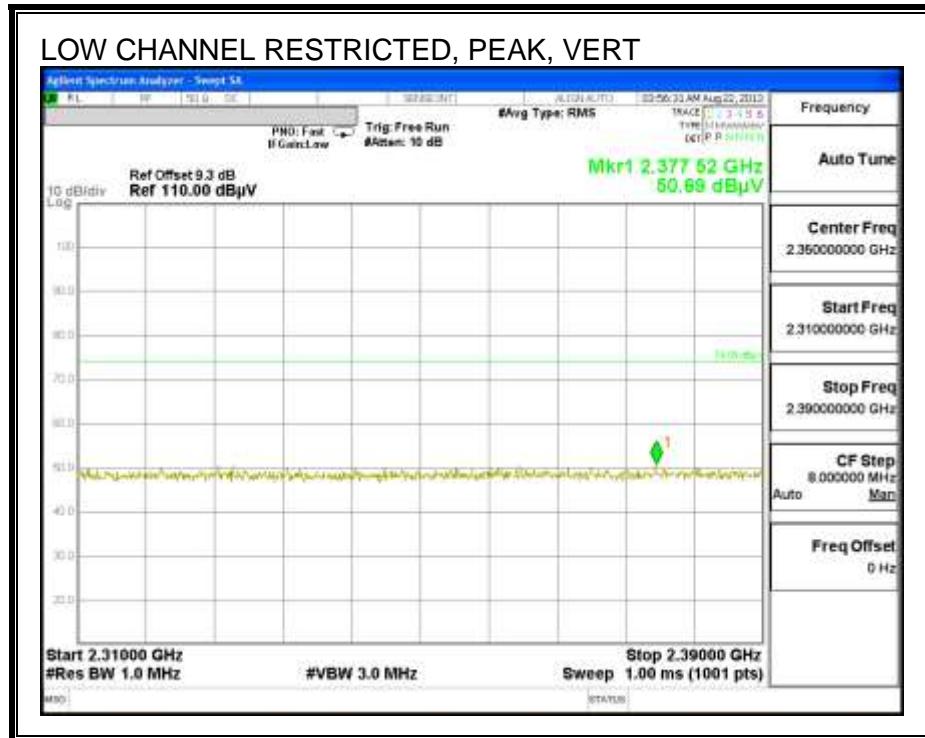



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

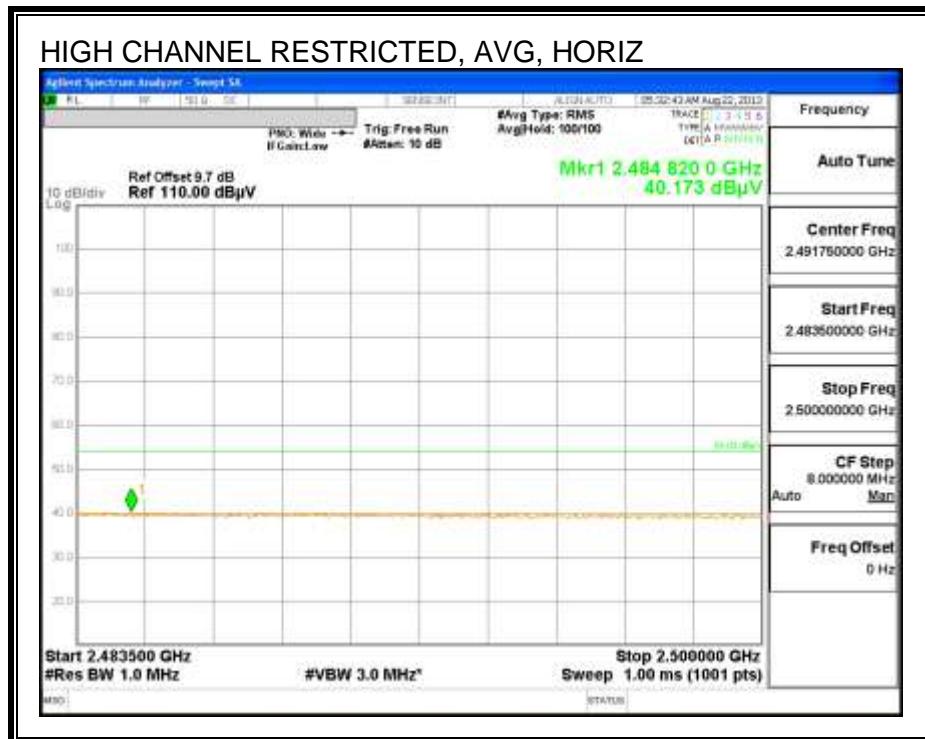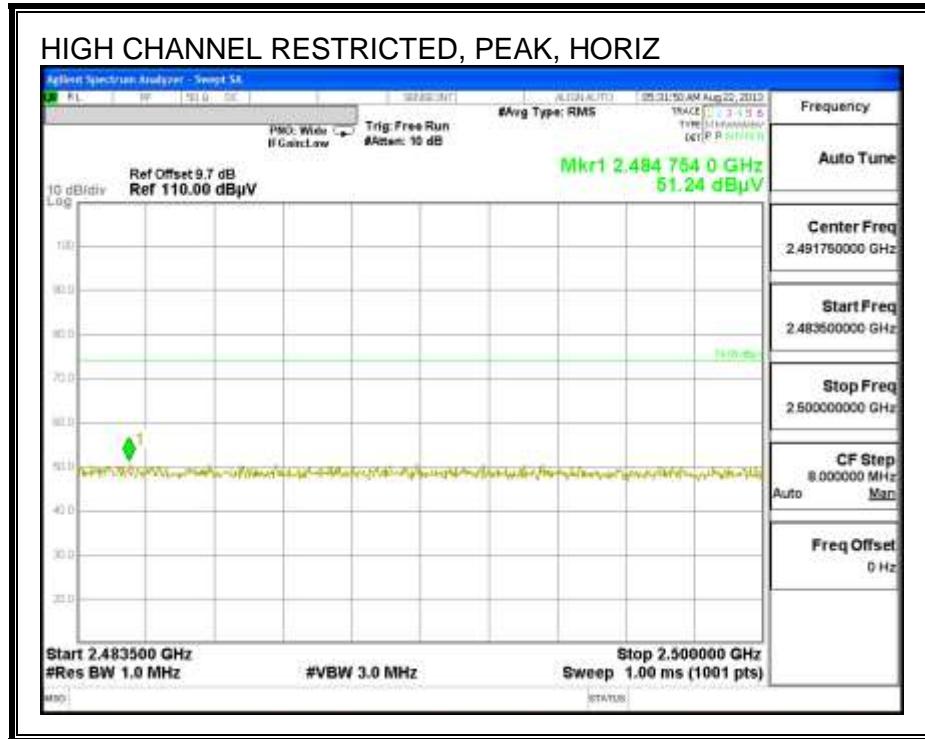

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

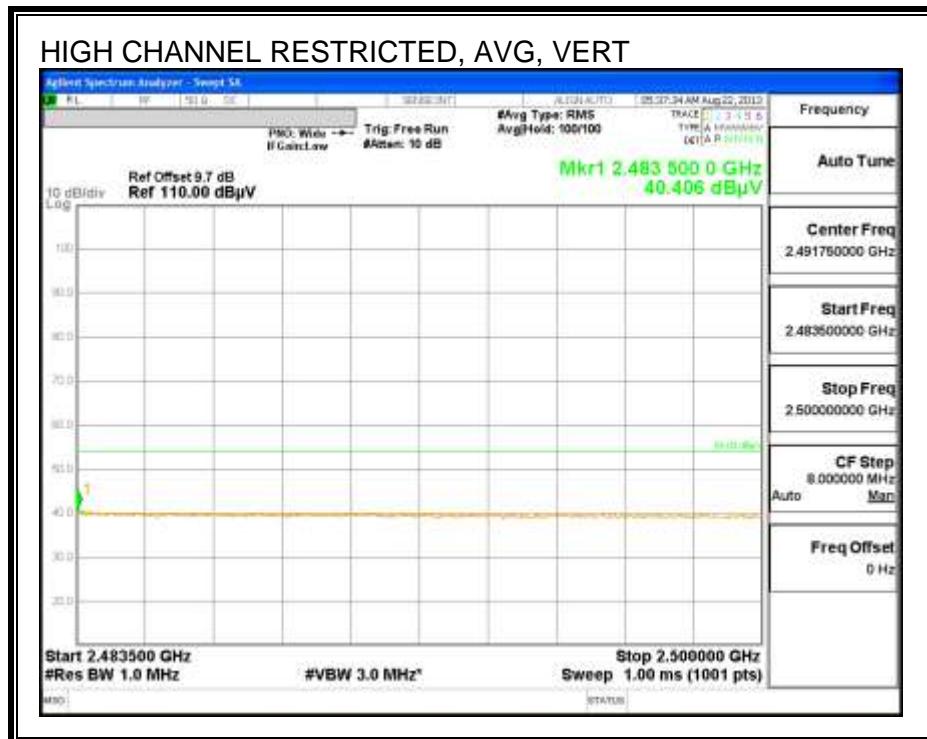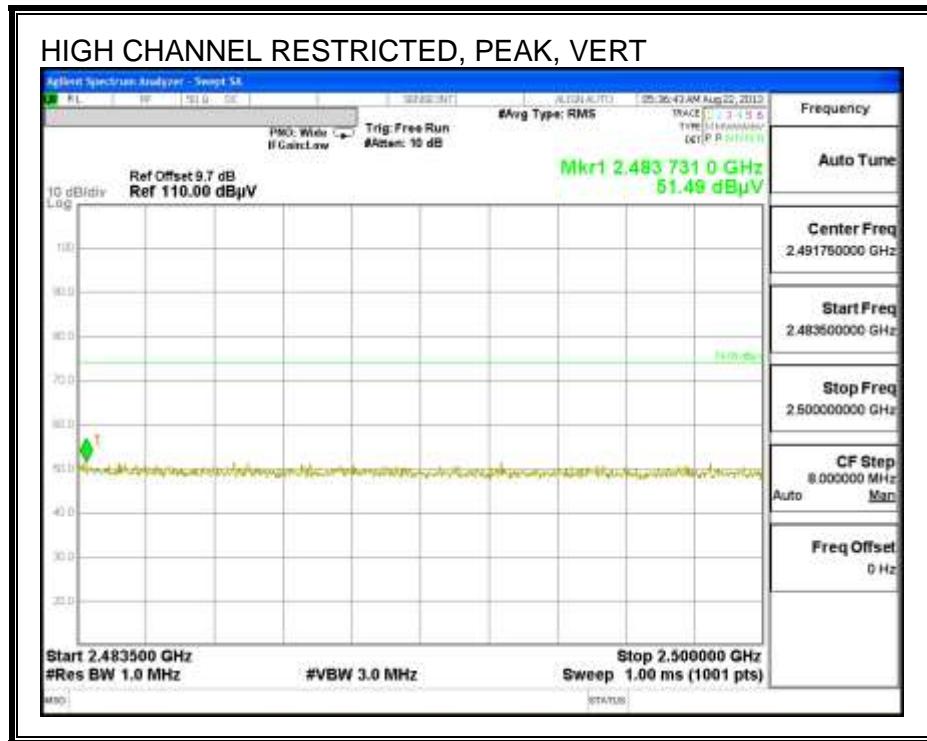

HARMONICS AND SPURIOUS EMISSIONS

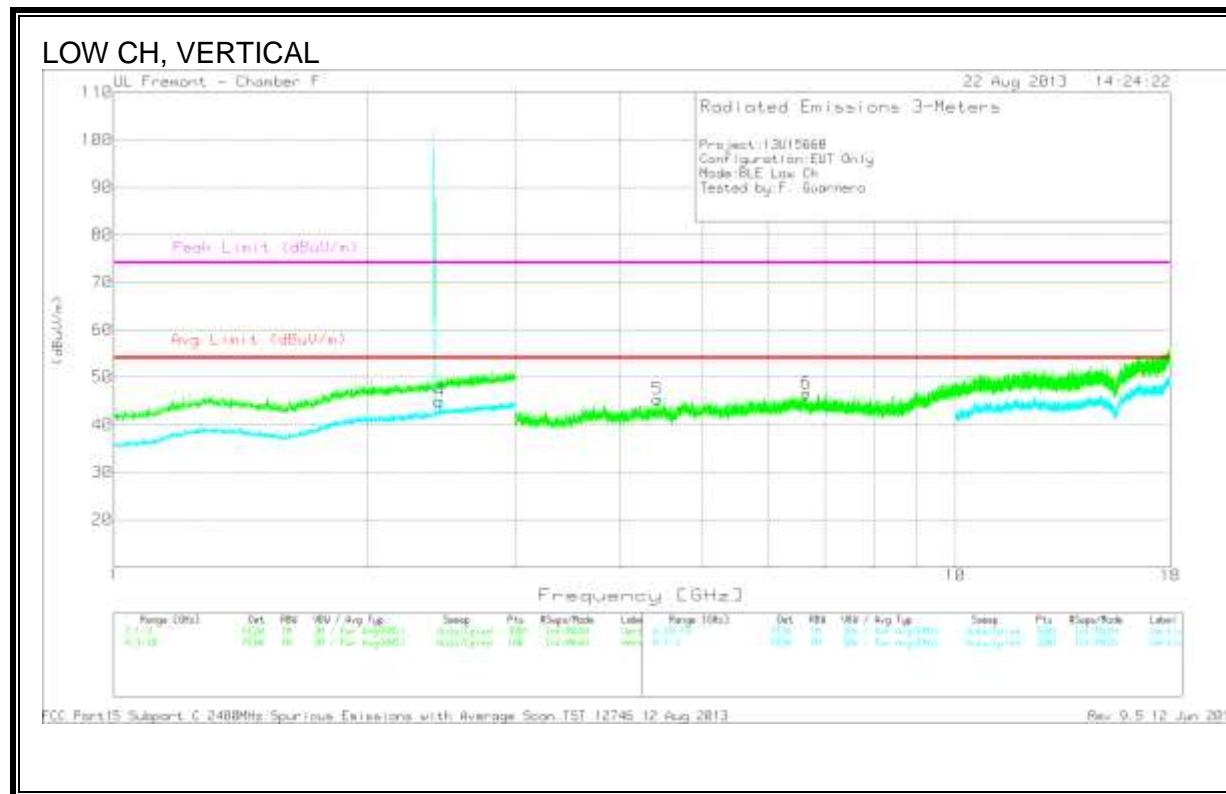
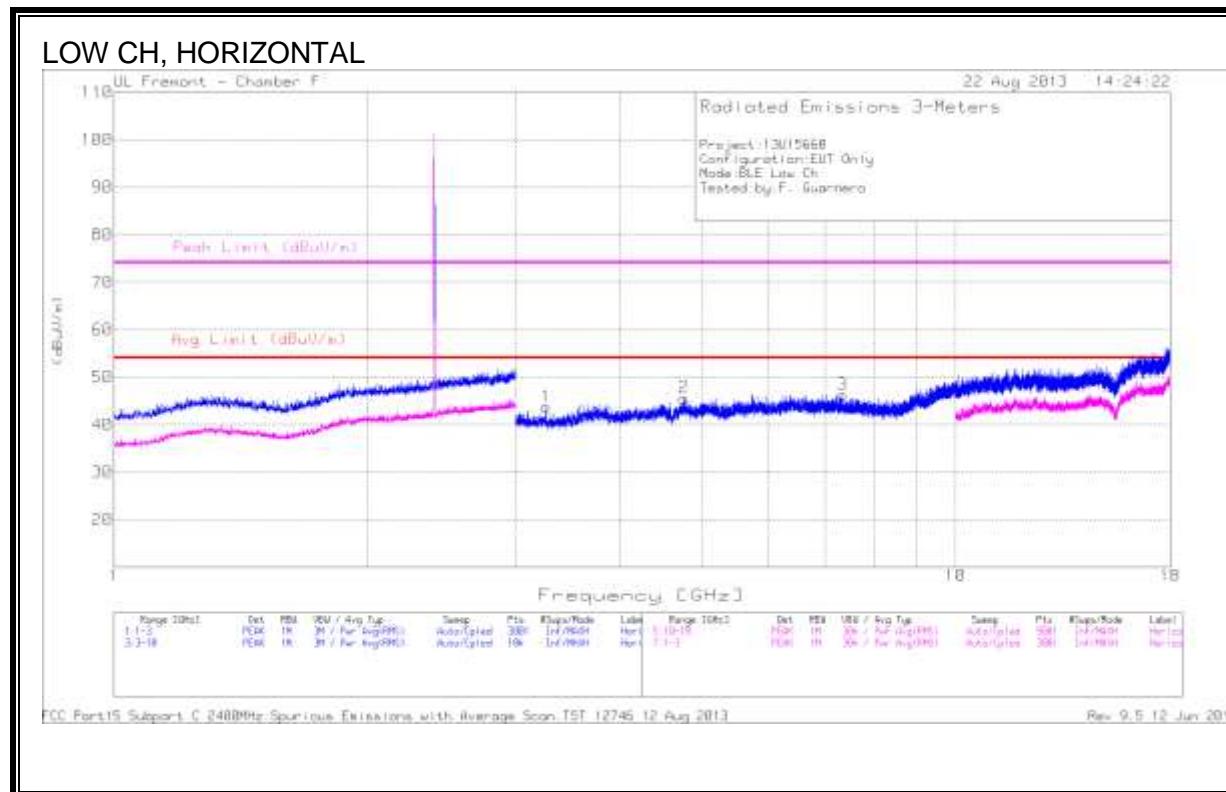


DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.264	39.75	PK	33.1	-29.1	43.75	53.97	-10.22	74	-30.25	0-360	200	H
2	4.754	40.02	PK	34.1	-28.5	45.62	53.97	-8.35	74	-28.38	0-360	101	H
3	7.348	37.99	PK	35.7	-27.4	46.29	53.97	-7.68	74	-27.71	0-360	200	H
5	4.428	40.56	PK	33.7	-28.9	45.36	53.97	-8.61	74	-28.64	0-360	100	V
6	6.653	38.46	PK	35.8	-27.6	46.66	53.97	-7.31	74	-27.34	0-360	199	V

PK - Peak detector

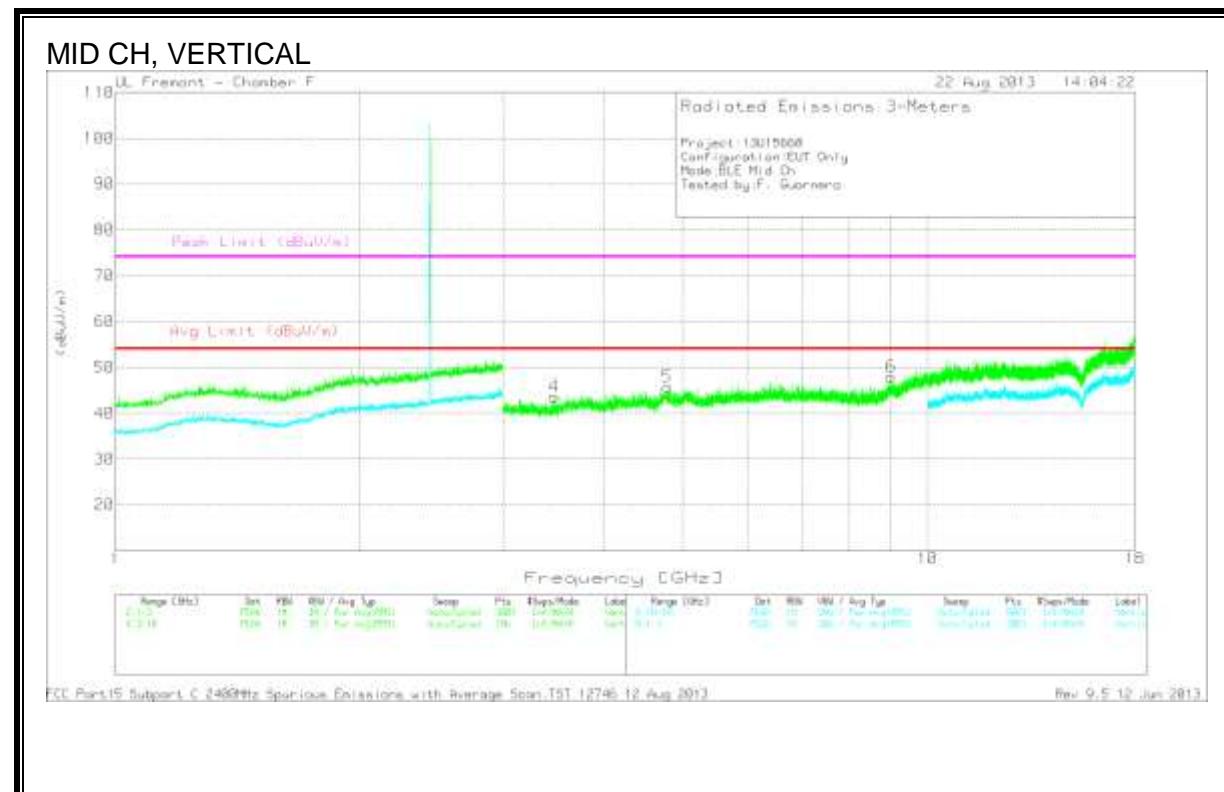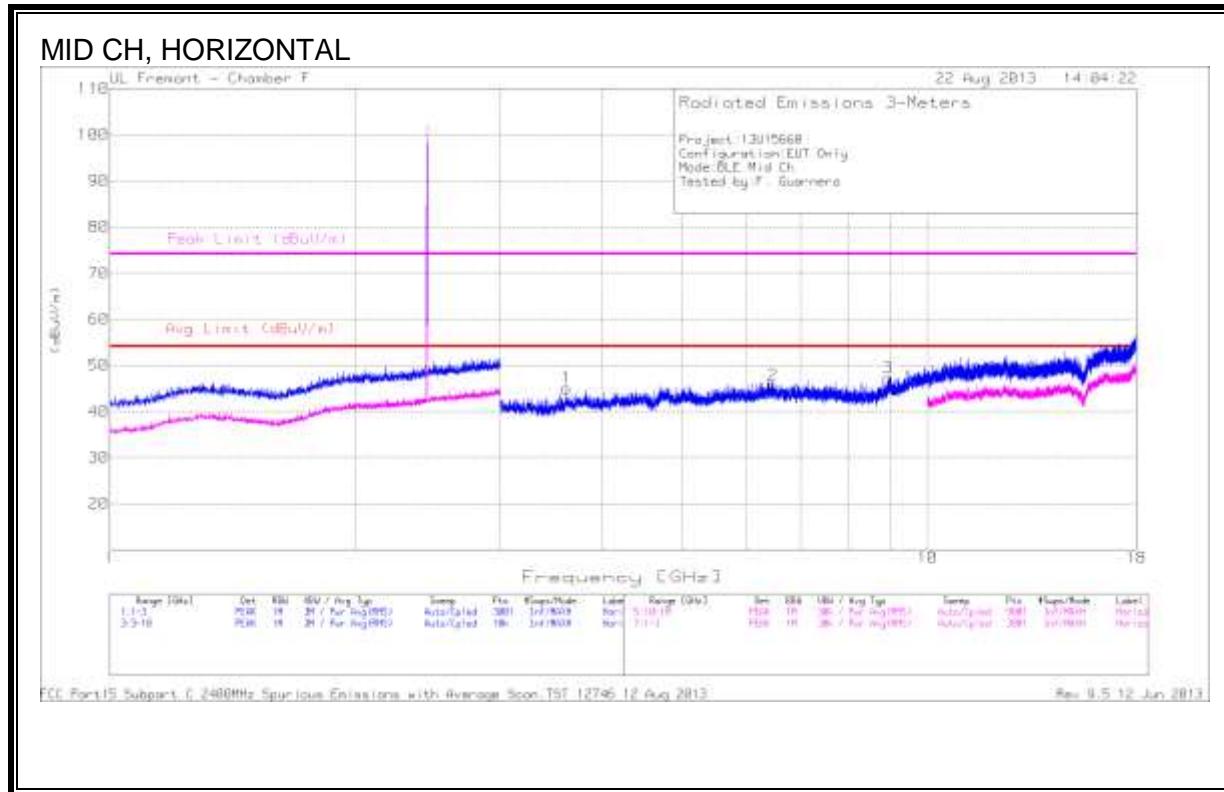


DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT120 (dB/m)	Amp/Cbl /Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.617	40.7	PK	33.7	-29.4	45	53.97	-8.97	74	-29	0-360	100	H
2	6.468	37.17	PK	35.8	-27.4	45.57	53.97	-8.4	74	-28.43	0-360	201	H
3	8.948	35.83	PK	36.3	-24.9	47.23	53.97	-6.74	74	-26.77	0-360	201	H
4	3.469	39.49	PK	33.1	-29	43.59	53.97	-10.38	74	-30.41	0-360	199	V
5	4.78	39.76	PK	34.1	-28.1	45.76	53.97	-8.21	74	-28.24	0-360	199	V
6	9.018	35.9	PK	36.4	-24.3	48	53.97	-5.97	74	-26	0-360	199	V

PK - Peak detector

HIGH CH, HORIZONTAL

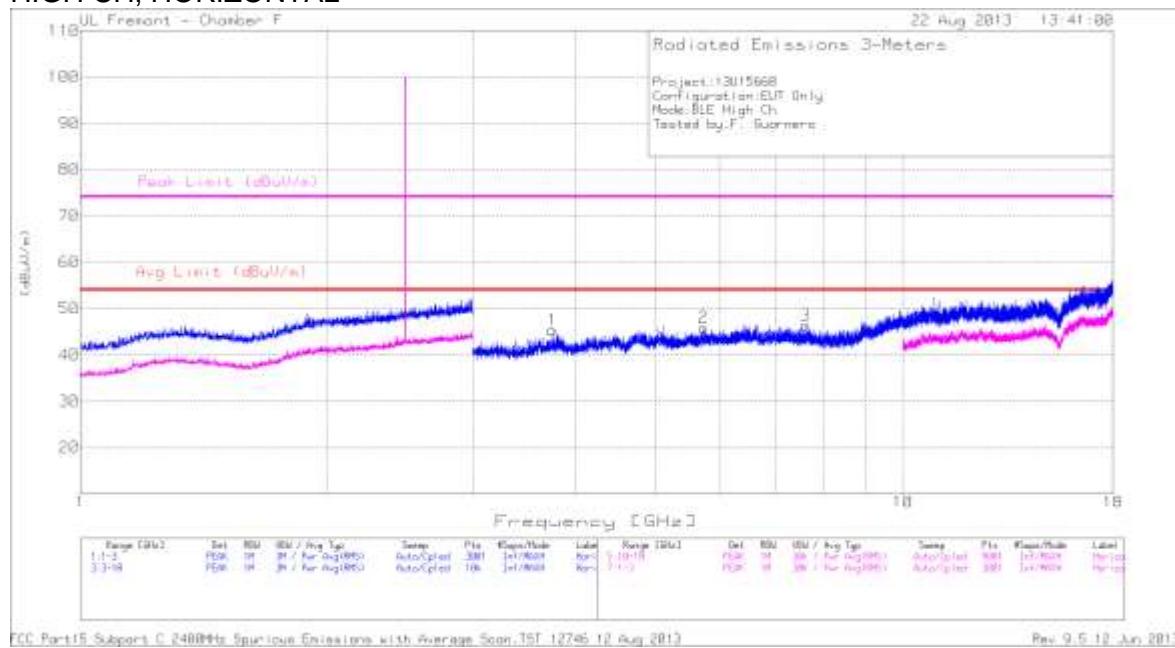

HIGH CH, VERTICAL



DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.748	41.07	PK	33.5	-29.2	45.37	53.97	-8.6	74	-28.63	0-360	200	H
2	5.729	38.07	PK	34.9	-27.1	45.87	53.97	-8.1	74	-28.13	0-360	101	H
3	7.619	37.35	PK	35.9	-26.9	46.35	53.97	-7.62	74	-27.65	0-360	101	H
4	3.095	39.3	PK	33.3	-29.8	42.8	53.97	-11.17	74	-31.2	0-360	199	V
5	4.728	40.53	PK	34.1	-28.7	45.93	53.97	-8.04	74	-28.07	0-360	100	V
6	6.526	39.77	PK	35.8	-27.8	47.77	53.97	-6.2	74	-26.23	0-360	100	V

PK - Peak detector


9.3. WORST-CASE ABOVE 18 GHz

SPURIOUS EMISSIONS 18 TO 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

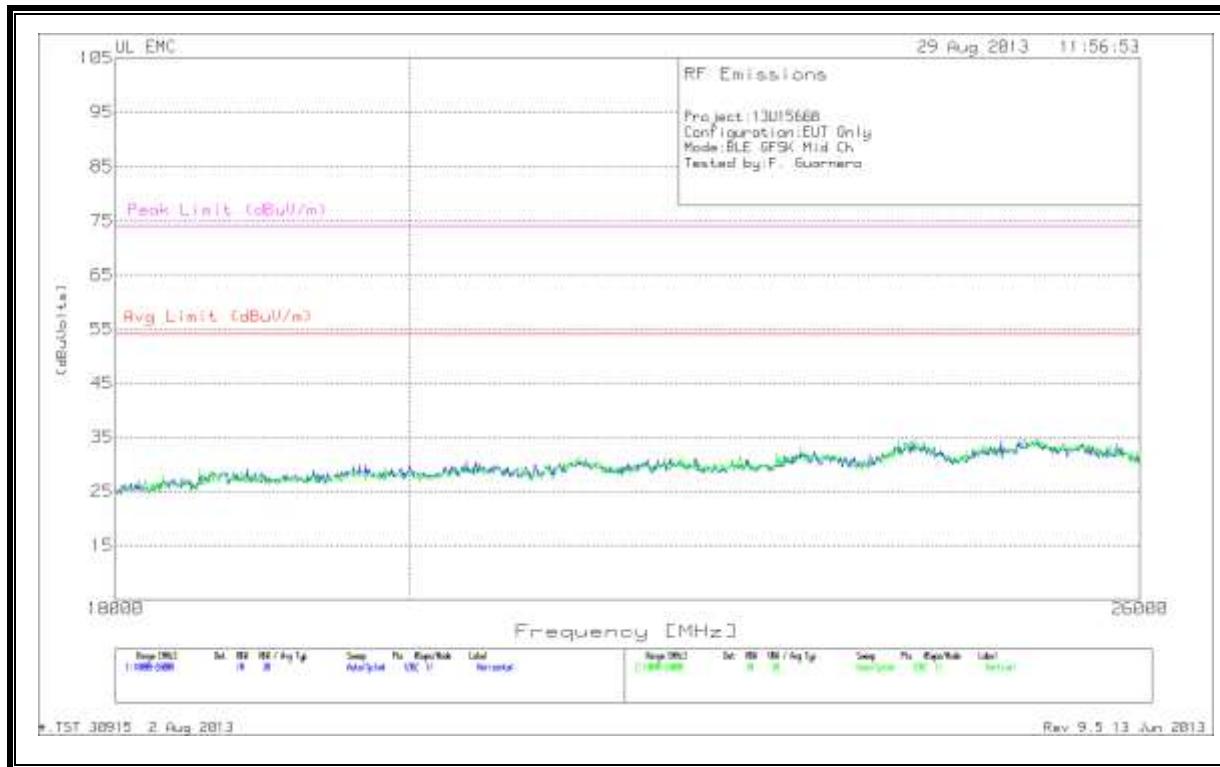


9.4. WORST-CASE BELOW 1 GHz

SPIURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

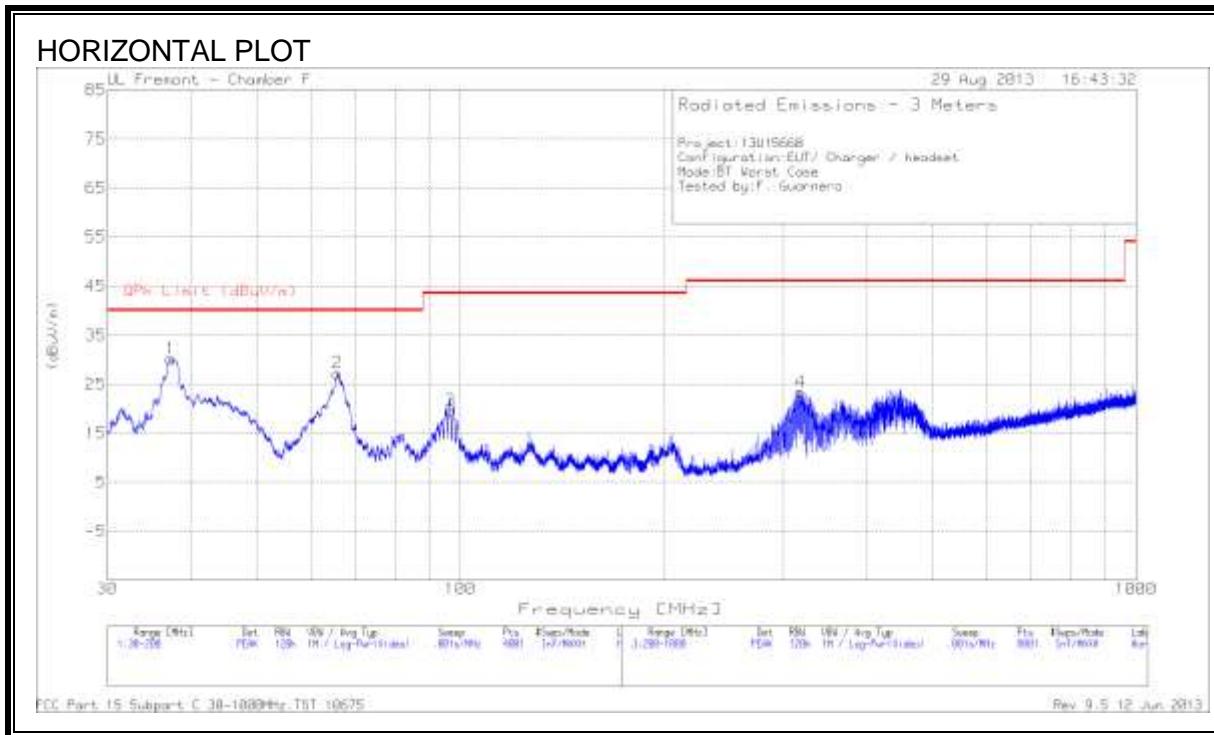

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

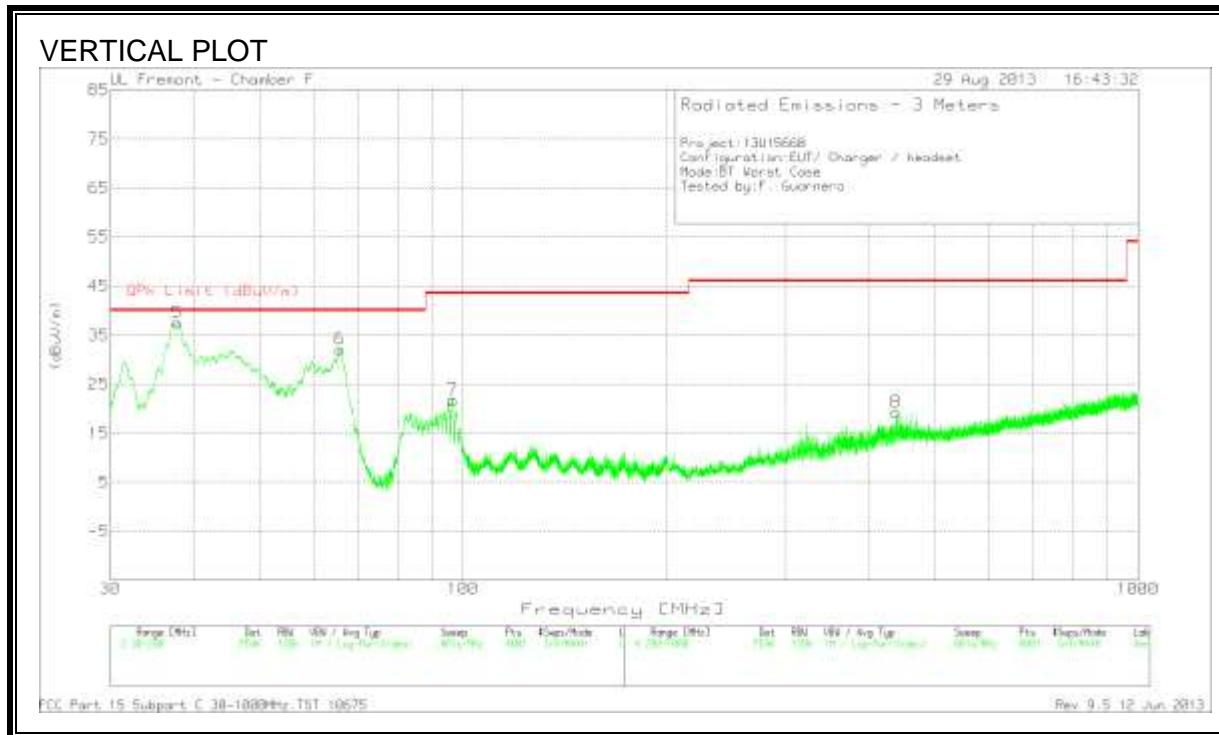

DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	37.2675	46.3	PK	15.9	-32	30.2	40	-9.8	0-360	300	H
2	65.785	51.2	PK	7.9	-31.8	27.3	40	-12.7	0-360	300	H
3	96.64	41.76	PK	9.5	-31.7	19.56	43.52	-23.96	0-360	200	H
4	318.6	40.17	PK	13.9	-30.7	23.37	46.02	-22.65	0-360	100	H
5	37.735	53.93	PK	15.6	-32	37.53	40	-2.47	0-360	100	V
6	65.6575	56.07	PK	7.9	-31.8	32.17	40	-7.83	0-360	100	V
7	96.5125	43.91	PK	9.5	-31.7	21.71	43.52	-21.81	0-360	100	V
8	437.9	33.02	PK	16.7	-30.4	19.32	46.02	-26.7	0-360	200	V

PK - Peak detector

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
37.8737	51.21	QP	15.5	-32	34.71	40	-5.29	146	112	V

QP - Quasi-Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

6 WORST EMISSIONS


Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	0.26925	46.58	PK	0.1	0	46.68	61.1	-14.42	-	-
2	0.26925	35.5	Av	0.1	0	35.6	-	-	51.1	-15.5
3	3.867	46.78	PK	0.1	0.1	46.98	56	-9.02	-	-
4	3.867	30.69	Av	0.1	0.1	30.89	-	-	46	-15.11
5	5.2125	45.16	PK	0.1	0.1	45.36	60	-14.64	-	-
6	5.2125	30.68	Av	0.1	0.1	30.88	-	-	50	-19.12

PK - Peak detector

Av - average detection

LINE 1 RESULTS

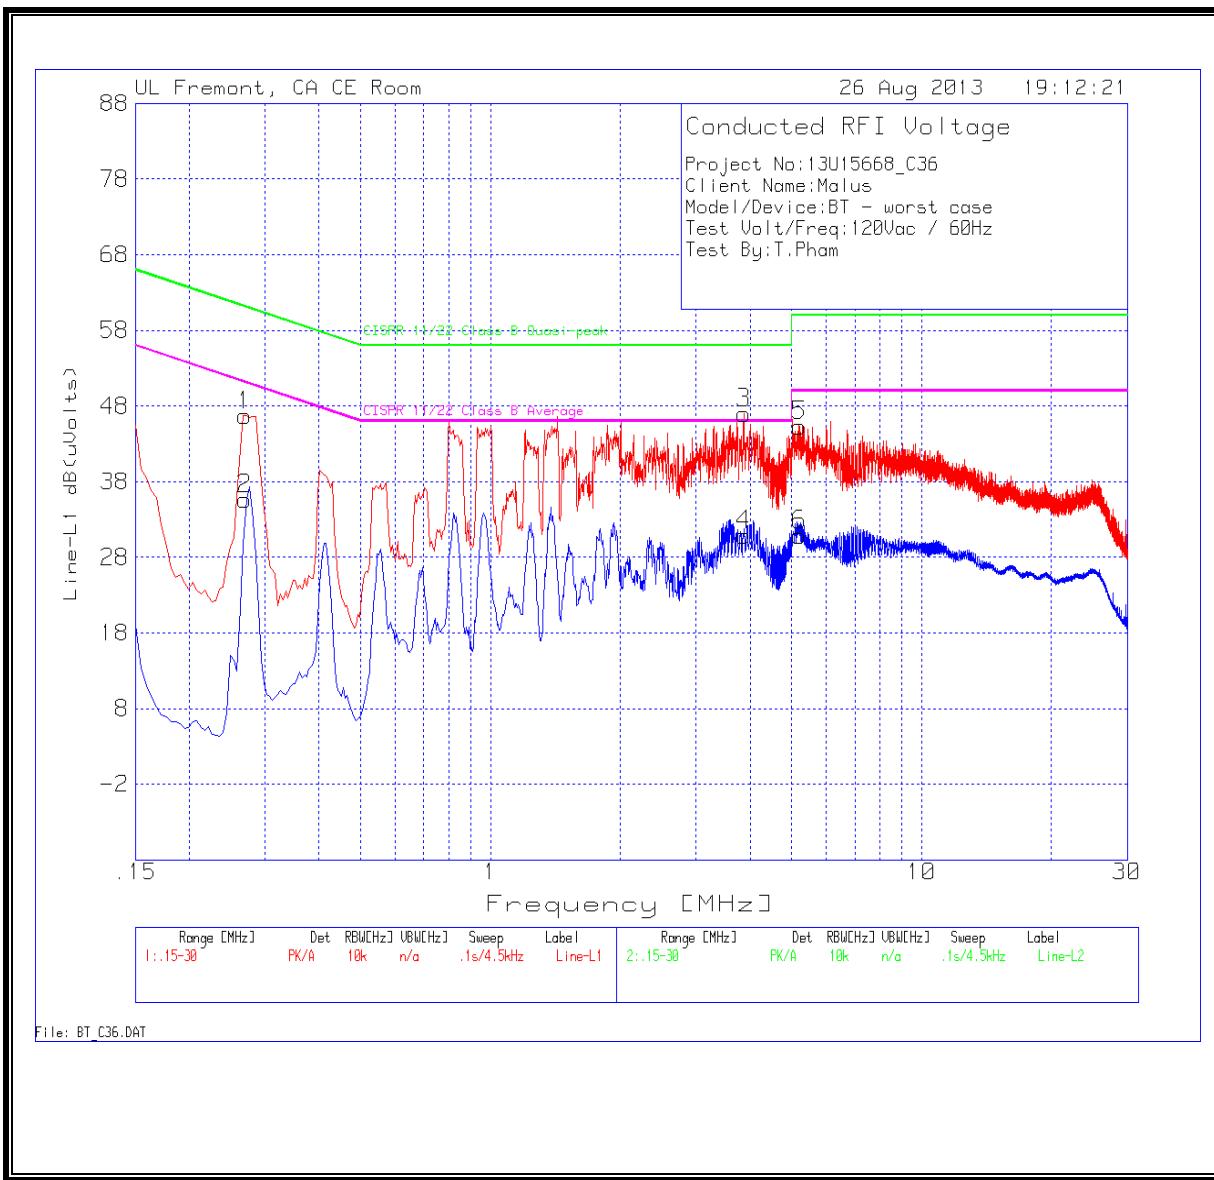

6 WORST EMISSIONS

Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
7	0.267	47.64	PK	0.1	0	47.74	61.2	-13.46	-	-
8	0.267	29.55	Av	0.1	0	29.65	-	-	51.2	-21.55
9	1.0005	43.93	PK	0.1	0	44.03	56	-11.97	-	-
10	1.0005	24.76	Av	0.1	0	24.86	-	-	46	-21.14
11	5.208	44.21	PK	0.1	0.1	44.41	60	-15.59	-	-
12	5.208	29.13	Av	0.1	0.1	29.33	-	-	50	-20.67

PK - Peak detector

Av - average detection

LINE 2 RESULTS

