

8.5.6. OUT-OF-BAND EMISSIONS


LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL


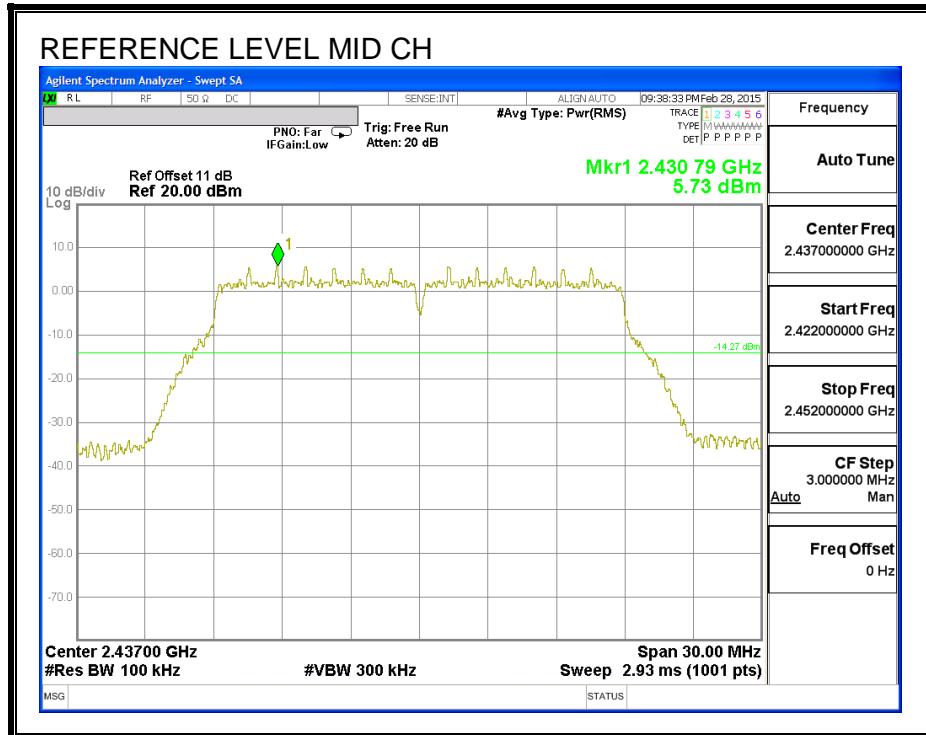


LOW CHANNEL BANDEDGE


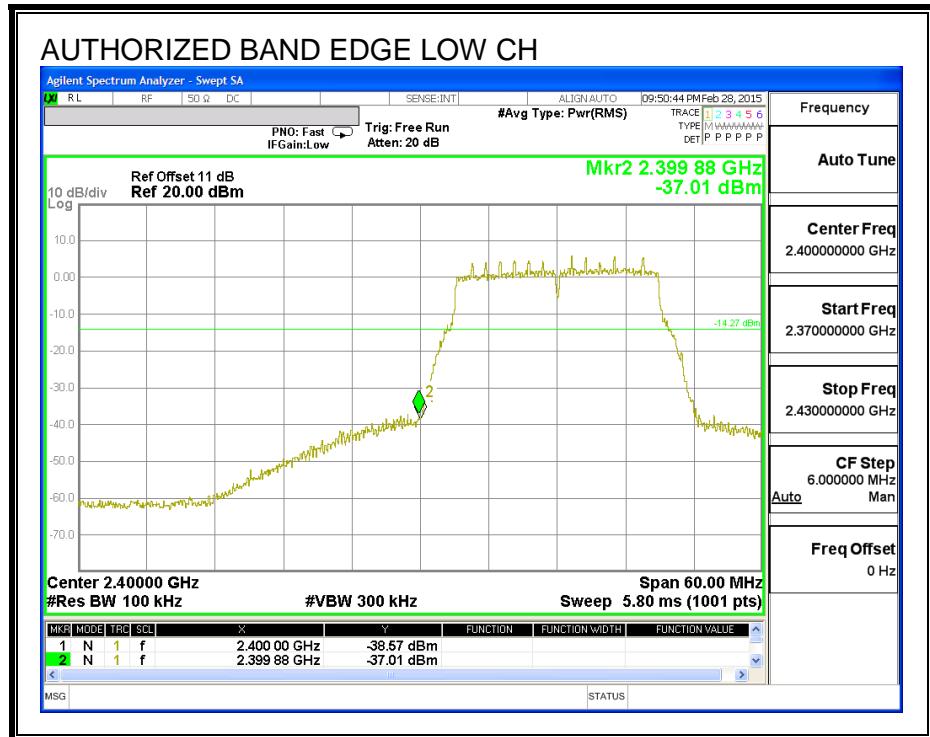




HIGH CHANNEL BANDEDGE

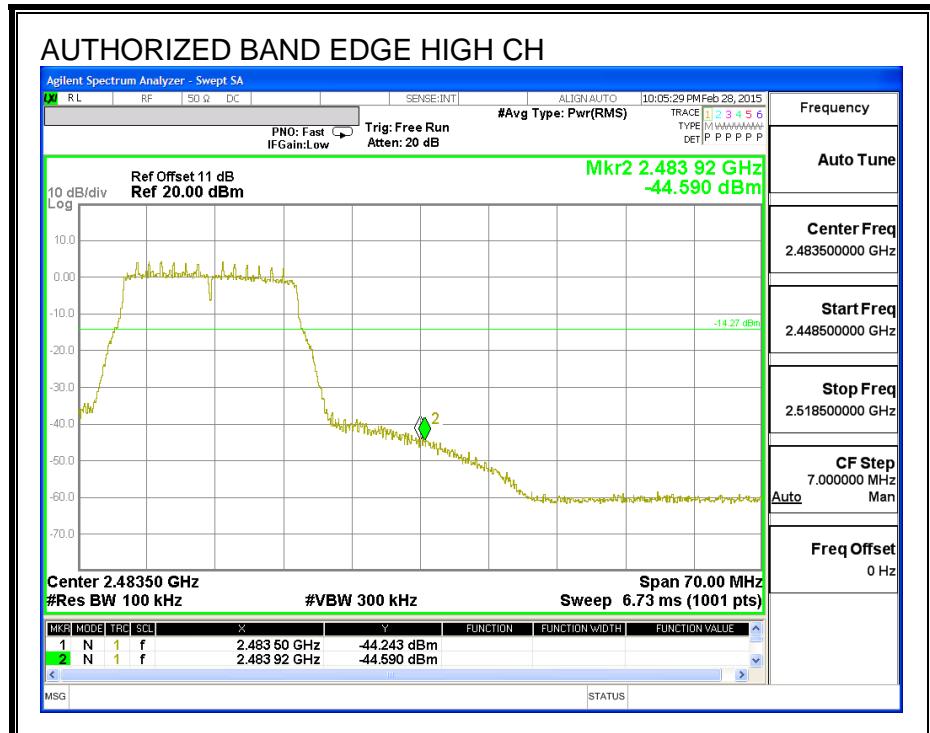


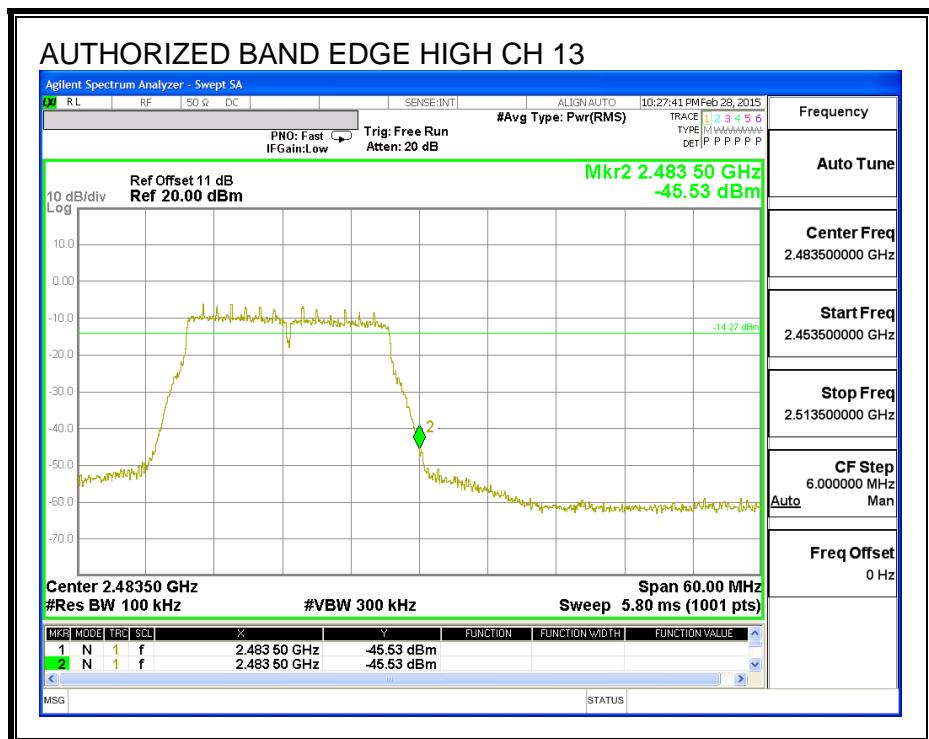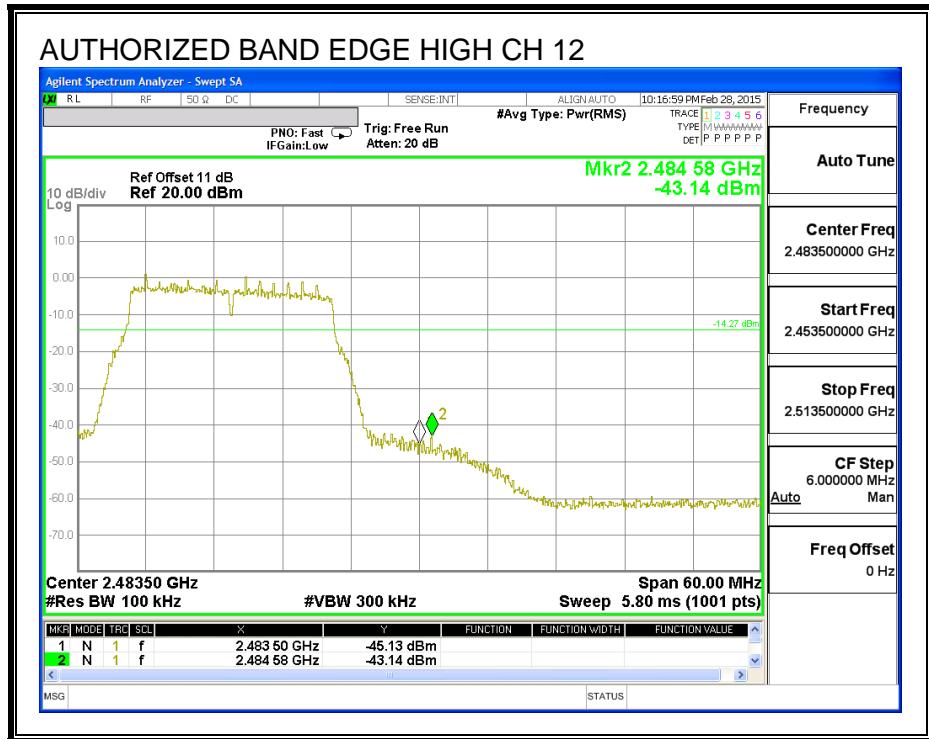

OUT-OF-BAND EMISSIONS

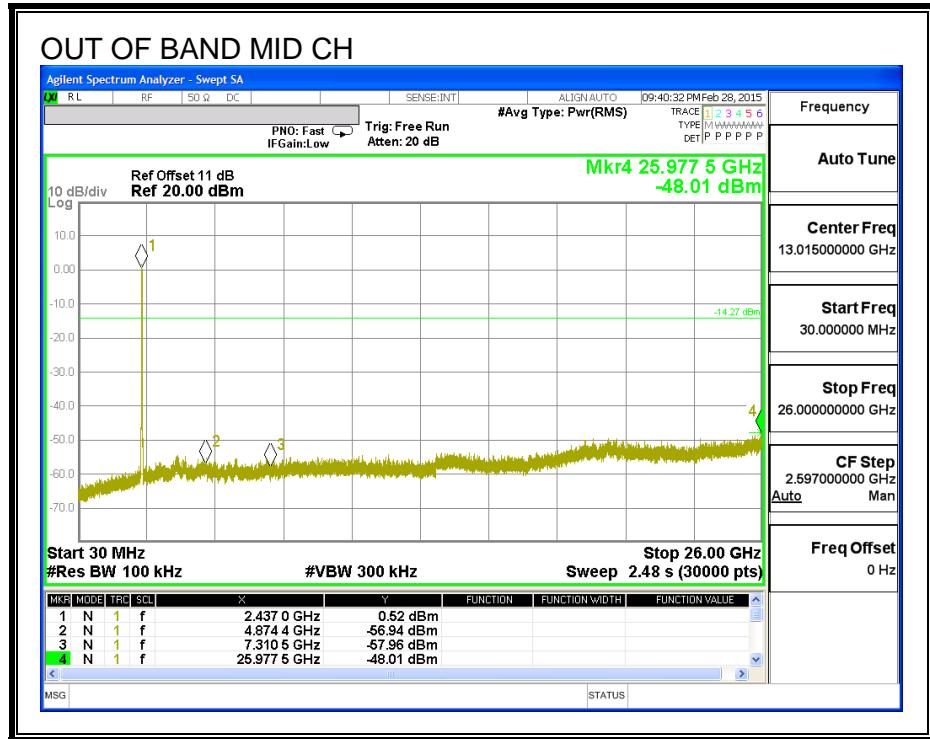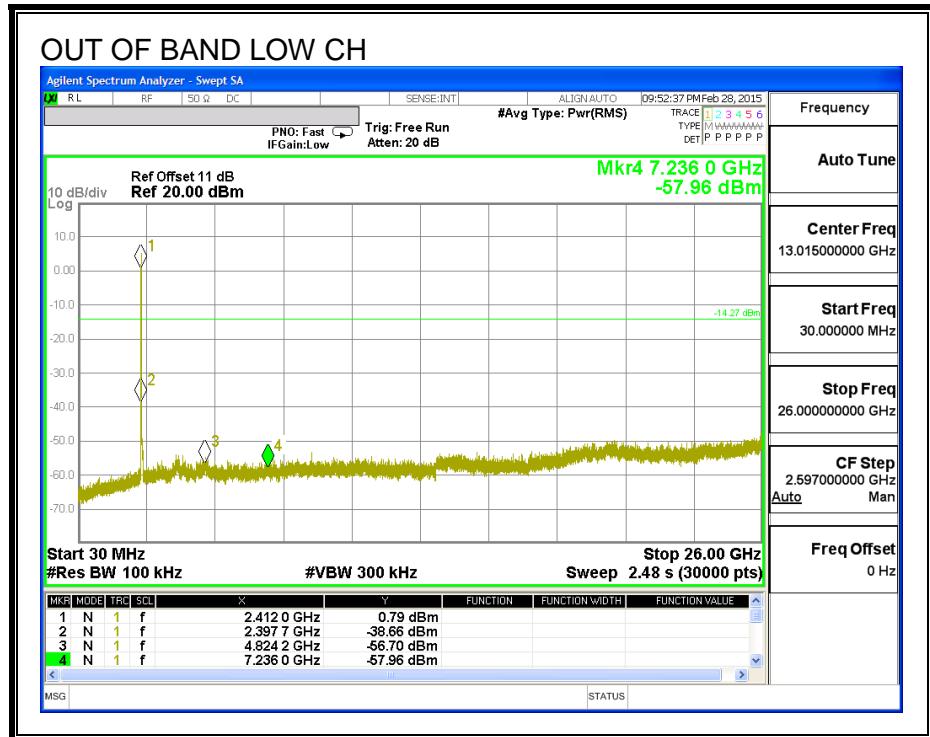

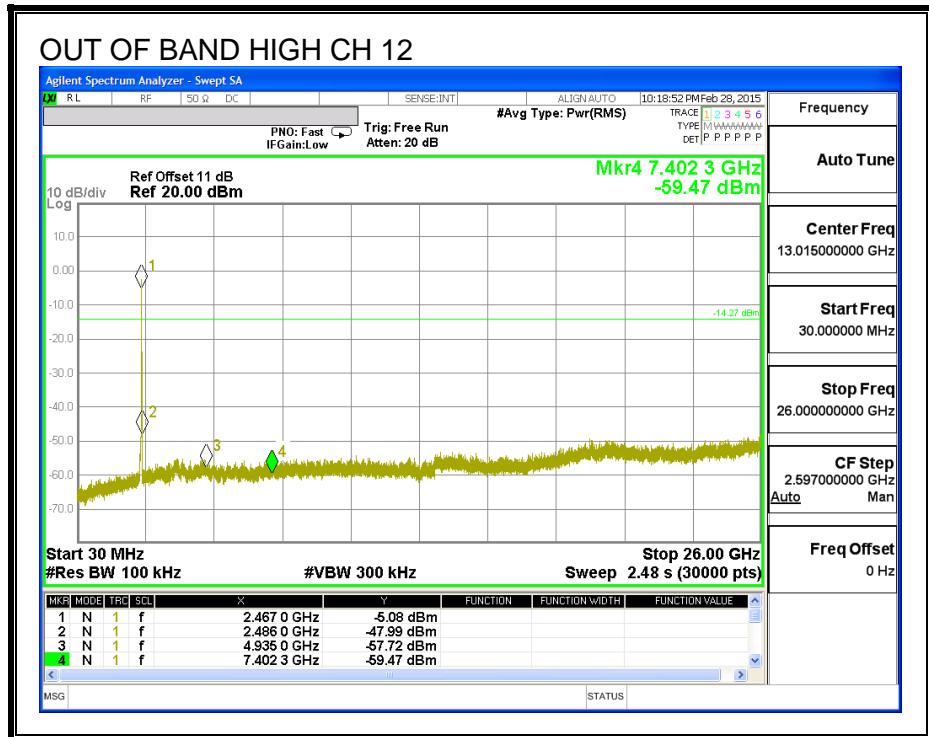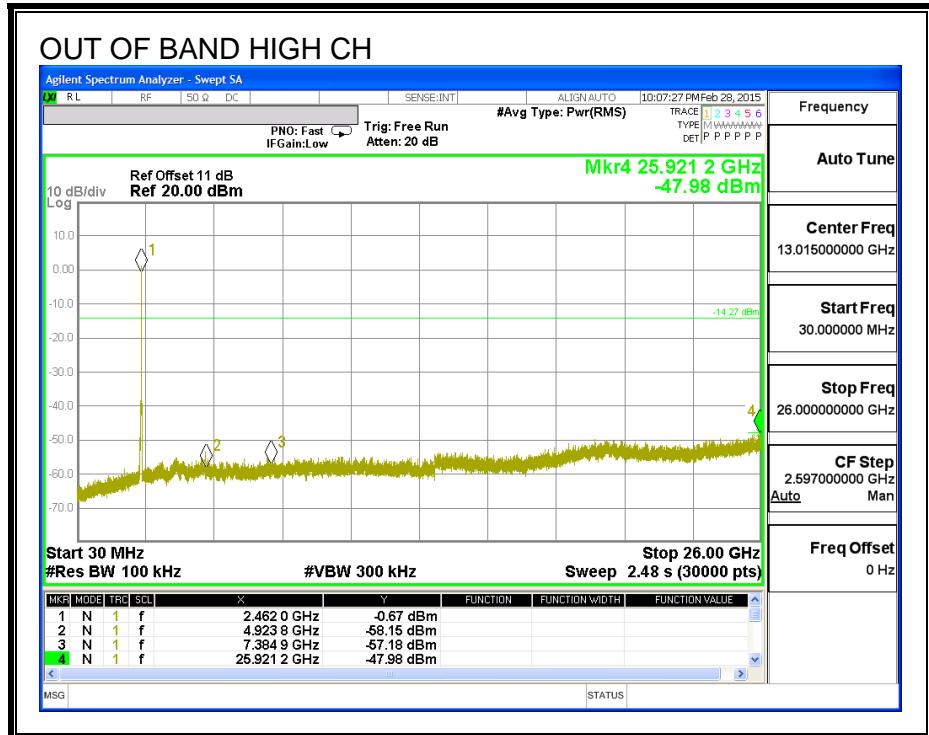

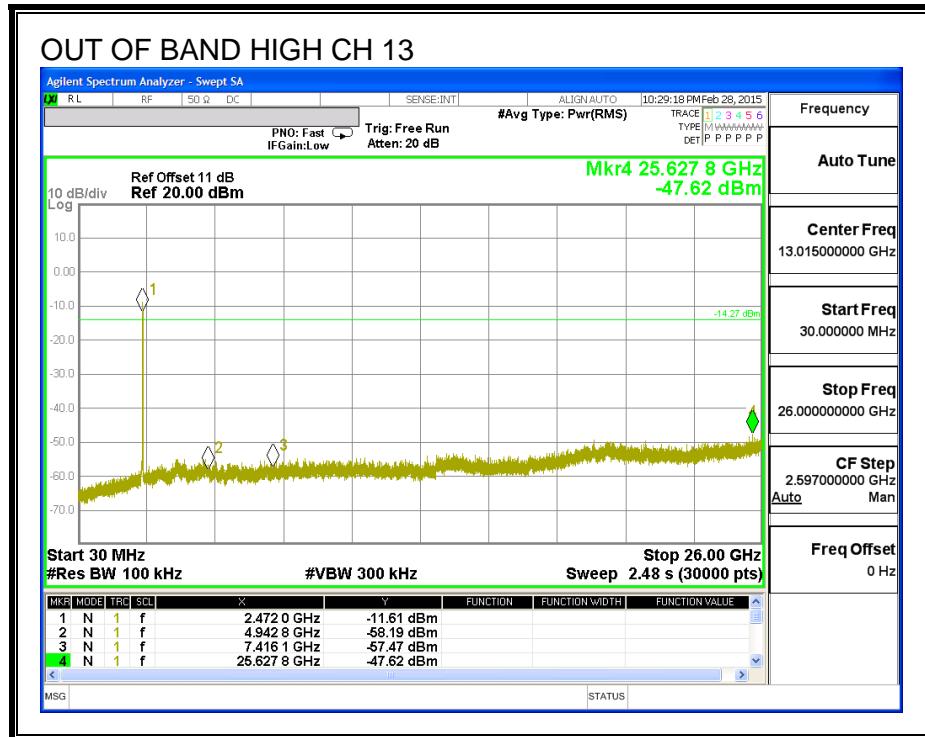

8.6. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA D)

8.6.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.390	0.5
Mid	2437	17.630	0.5
High	2462	17.610	0.5
High	2467	17.640	0.5
High	2472	17.340	0.5

6 dB BANDWIDTH

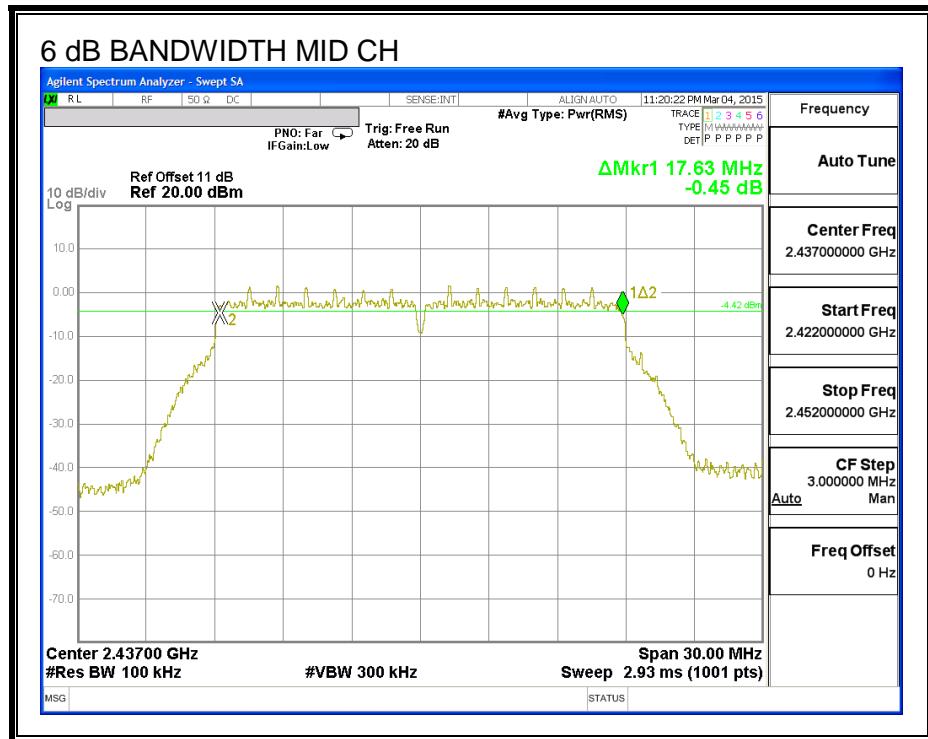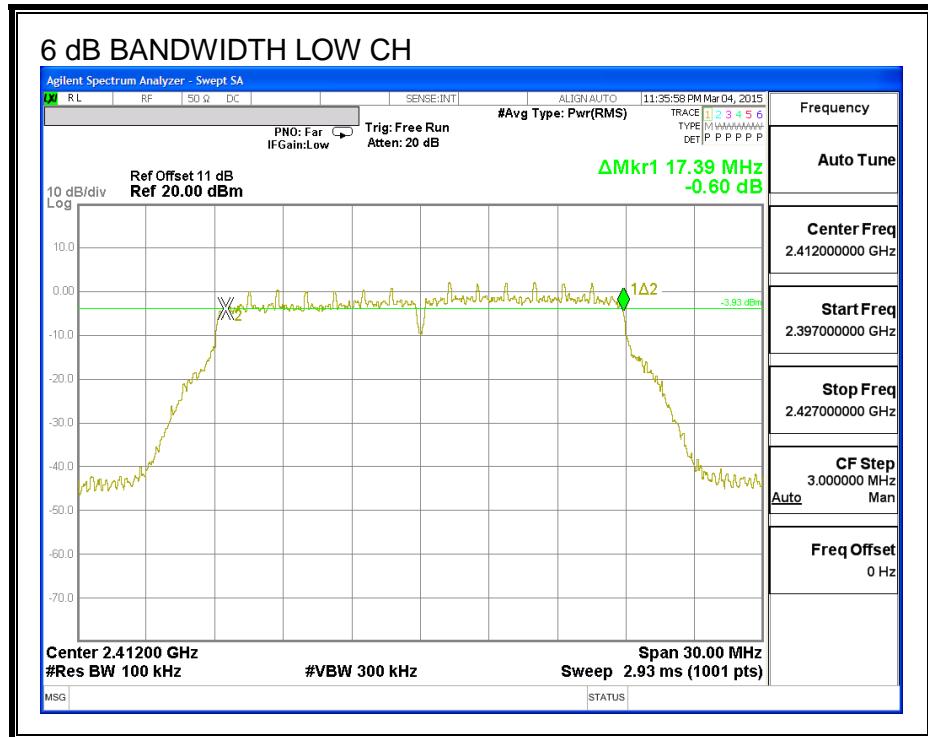

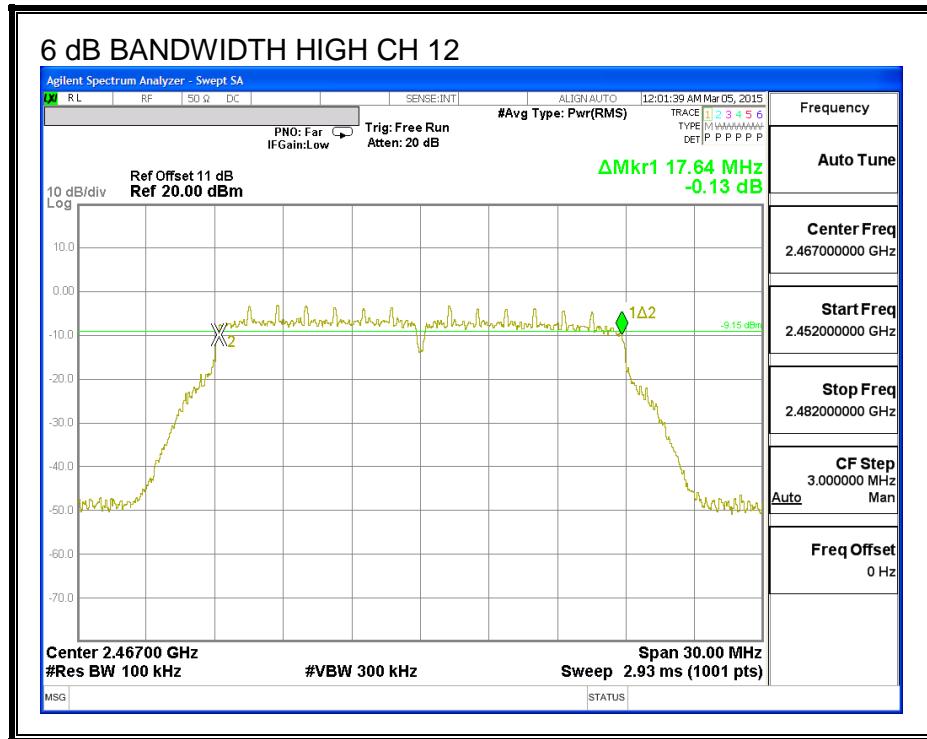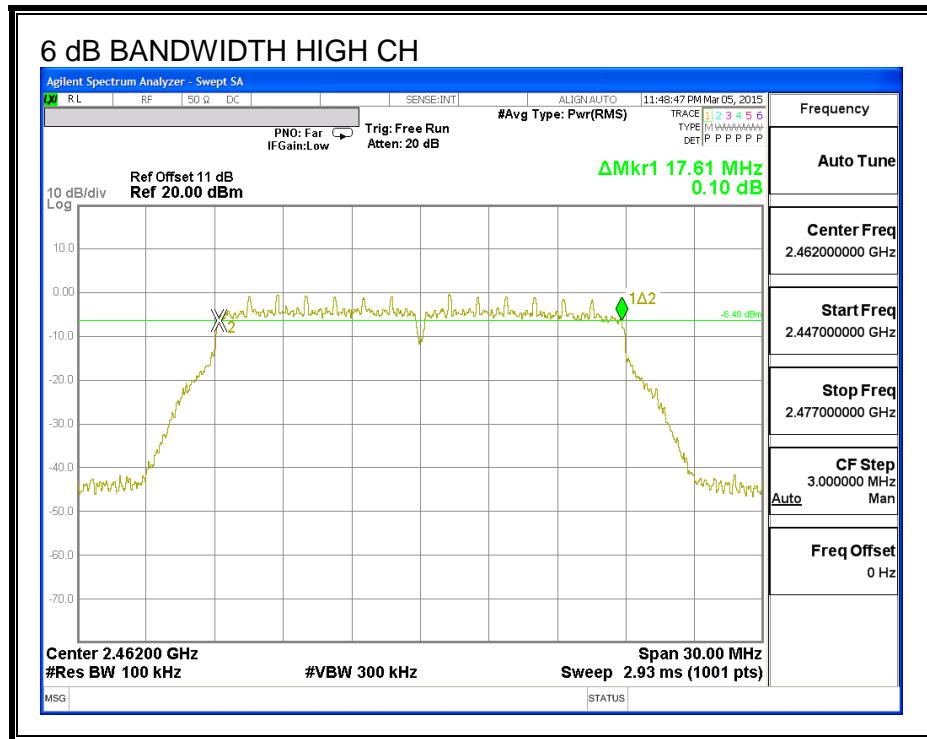

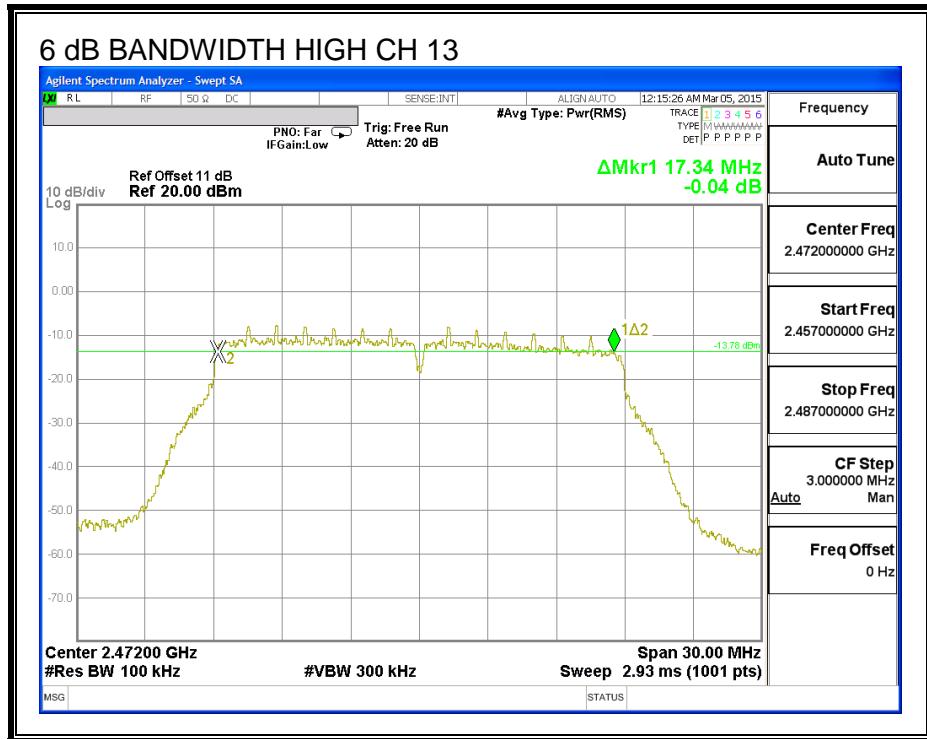

8.6.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.722
Mid	2437	17.676
High	2462	17.713
High	2467	17.759
High	2472	17.630

99% BANDWIDTH

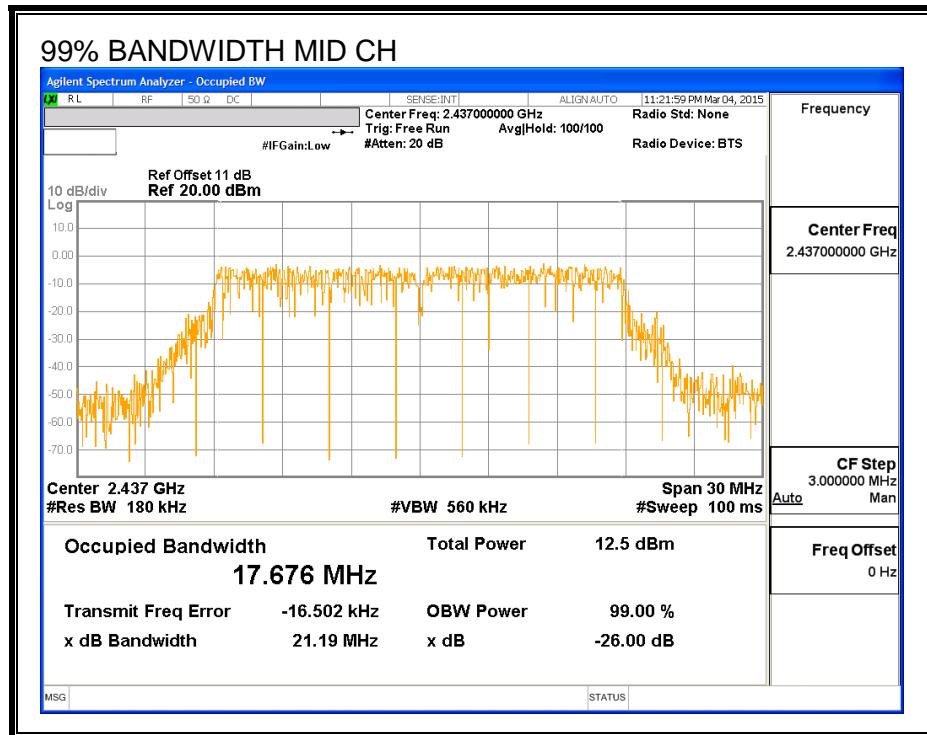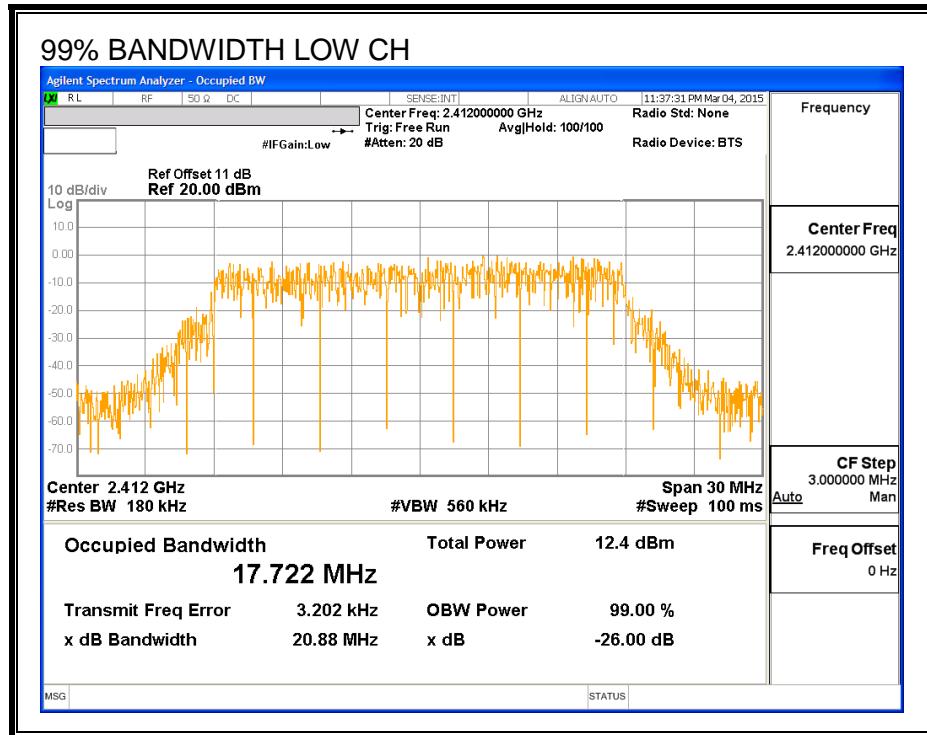

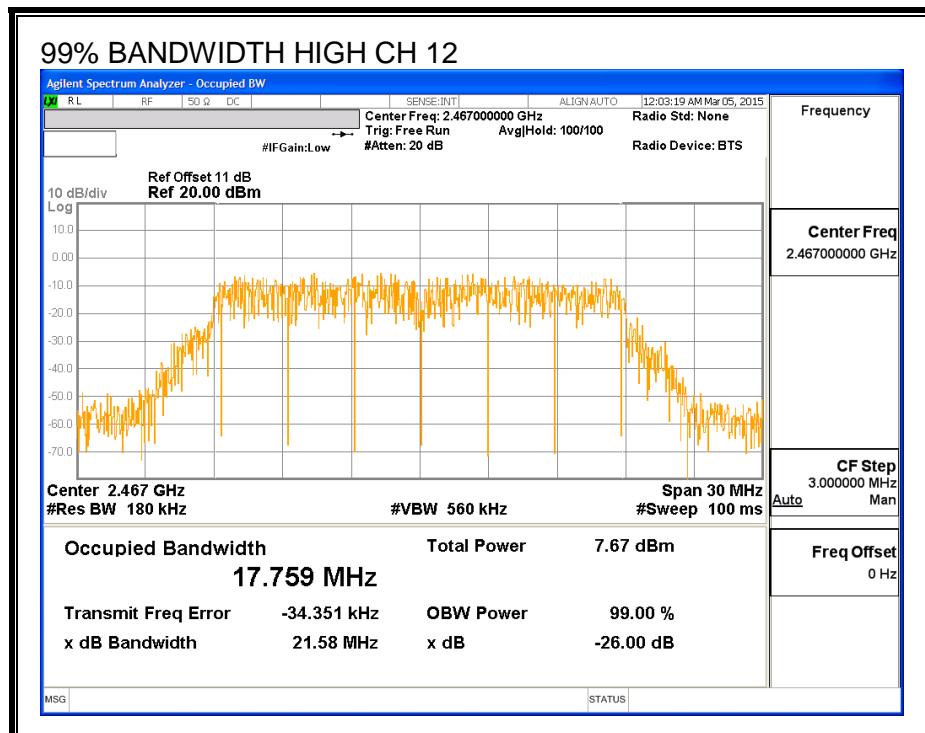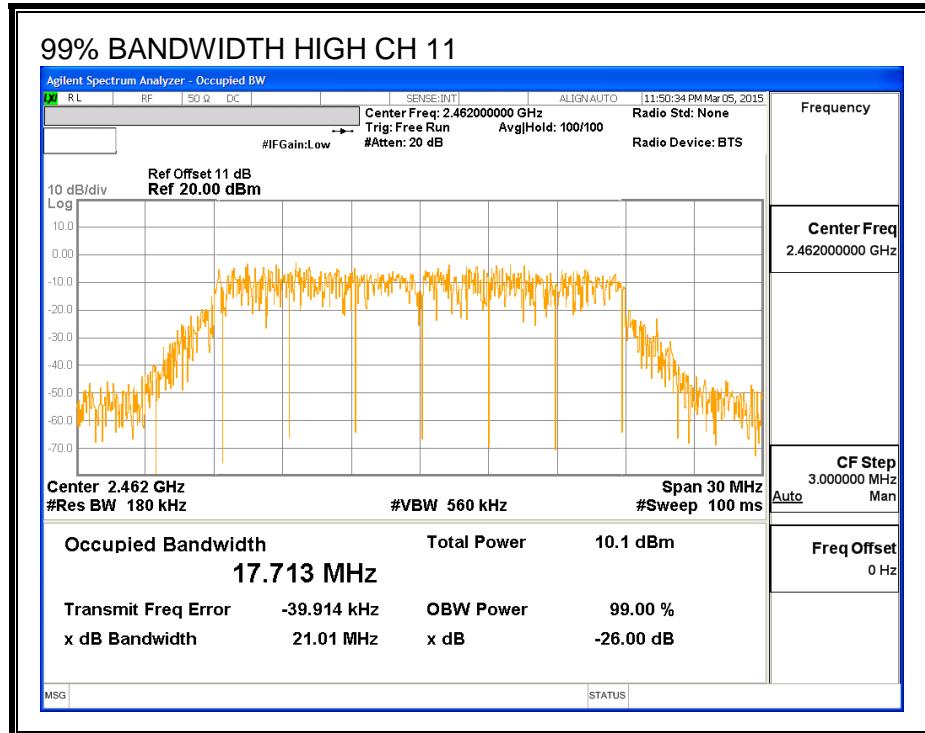

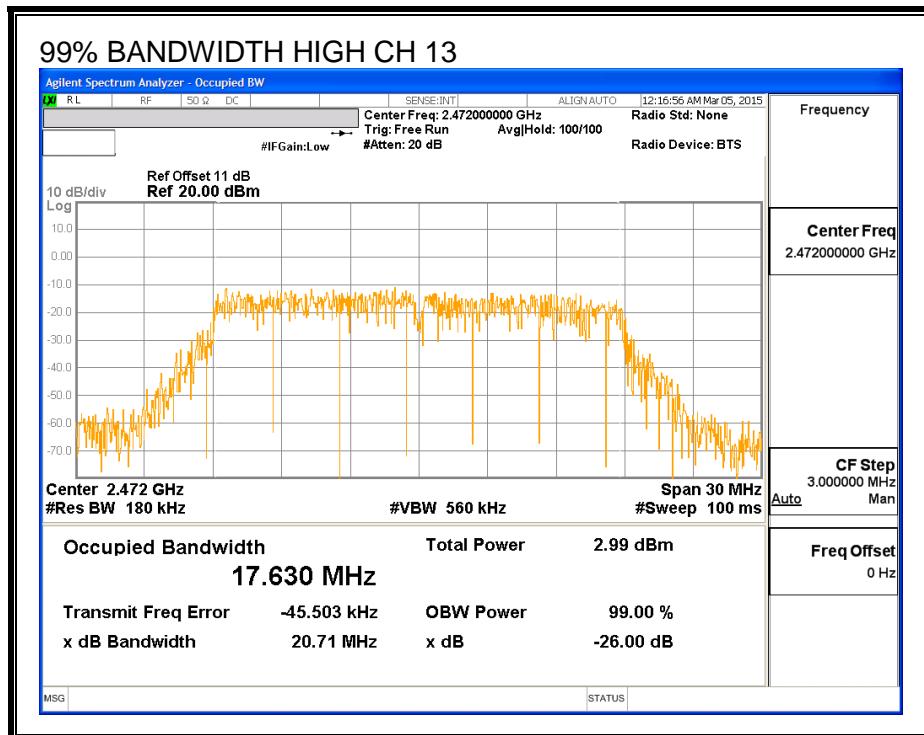

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	12.41
Mid	2437	12.49
High	2462	10.48
High	2467	7.94
High	2472	2.98

8.6.4. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.50	30.00	30	36	30.00
Mid	2437	2.50	30.00	30	36	30.00
High	2462	2.50	30.00	30	36	30.00
High	2467	2.50	30.00	30	36	30.00
High	2472	2.50	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Antenna D Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	20.64	20.64	30.00	-9.36
Mid	2437	20.83	20.83	30.00	-9.17
High	2462	18.71	18.71	30.00	-11.29
High	2467	15.94	15.94	30.00	-14.06
High	2472	11.19	11.19	30.00	-18.81

8.6.5. PSD

LIMITS



FCC §15.247



RESULTS


PSD Results

Channel	Frequency (MHz)	Antenna D Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.65	8.0	-20.7
Mid	2437	-12.42	8.0	-20.4
High	2462	-14.29	8.0	-22.3
High	2467	-17.32	8.0	-25.3
High	2472	-22.09	8.0	-30.1

PSD

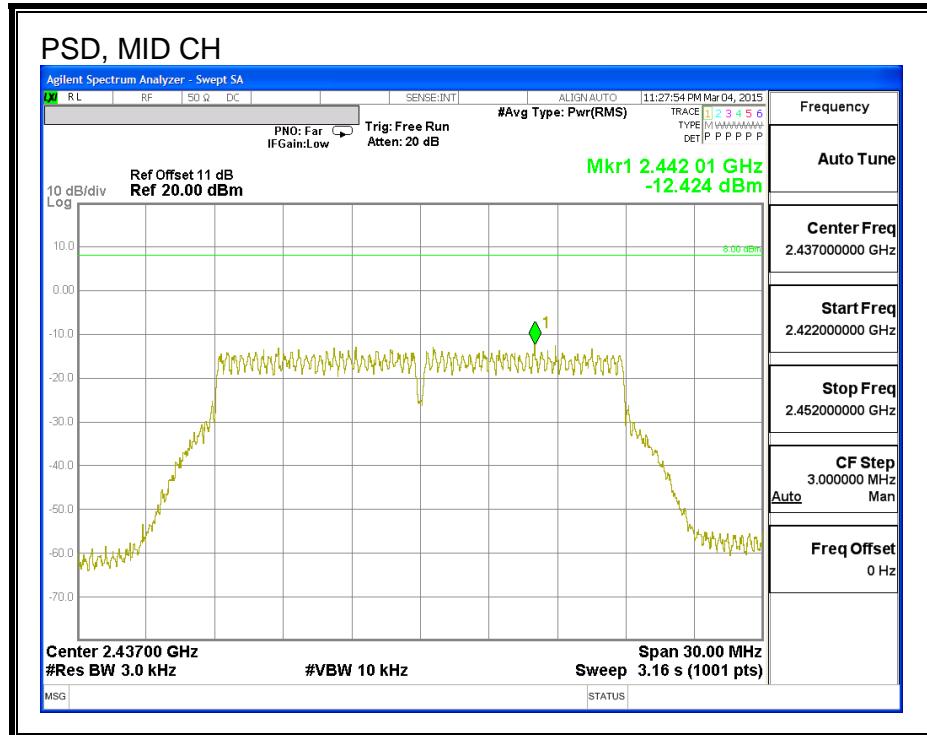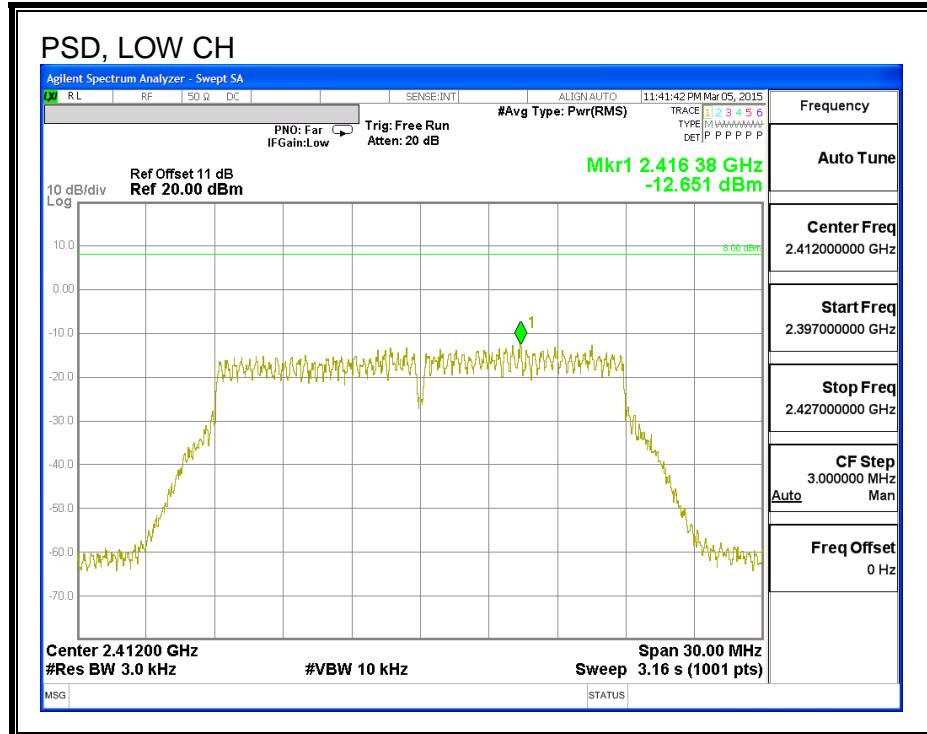

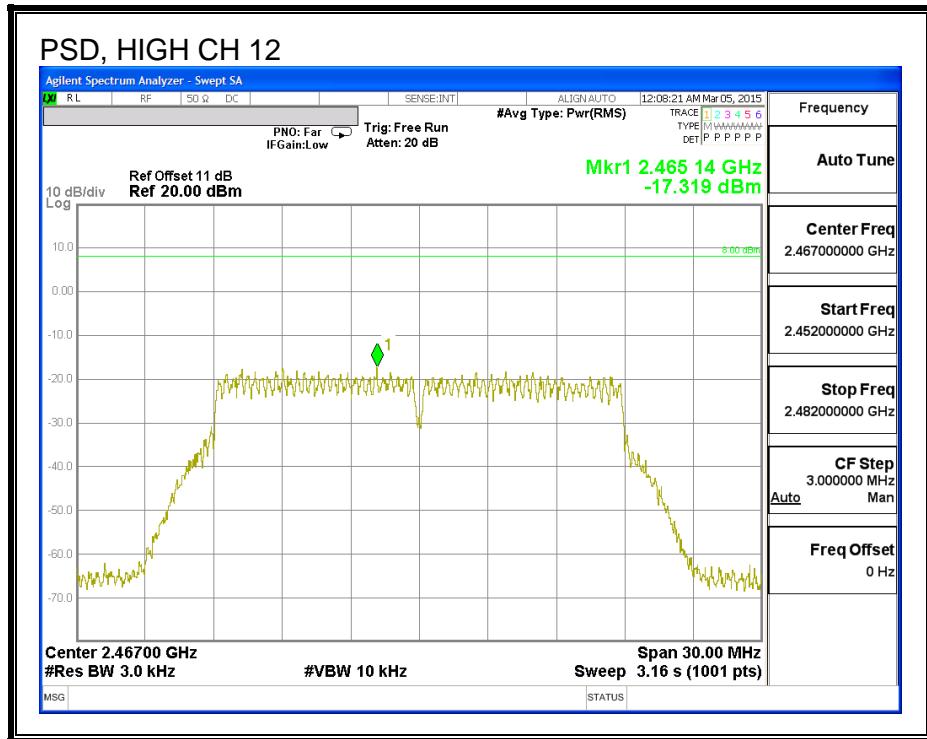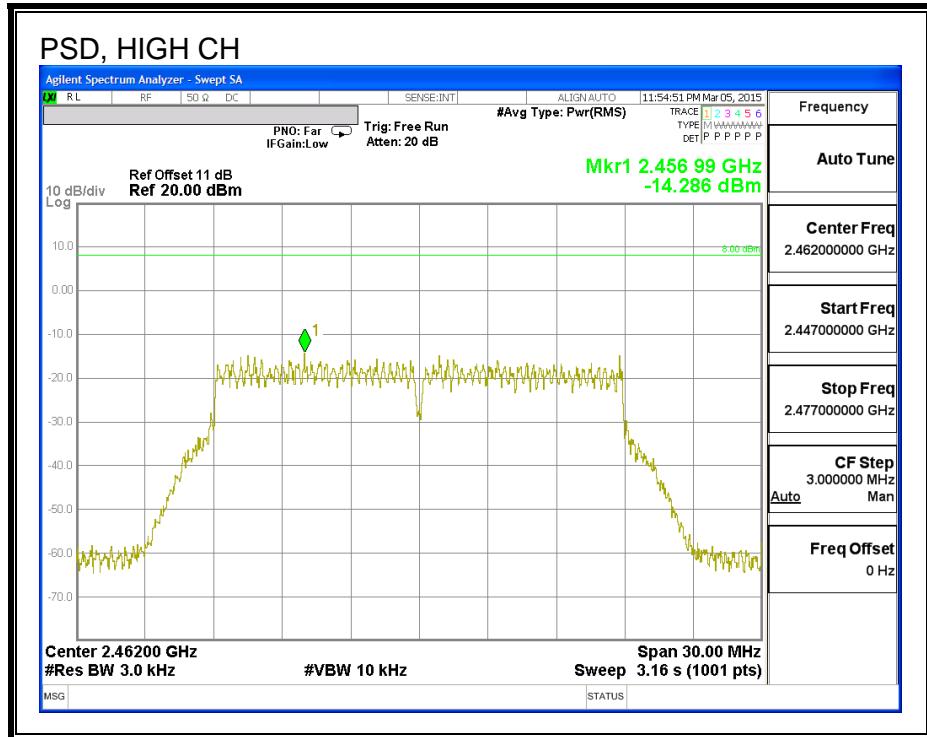

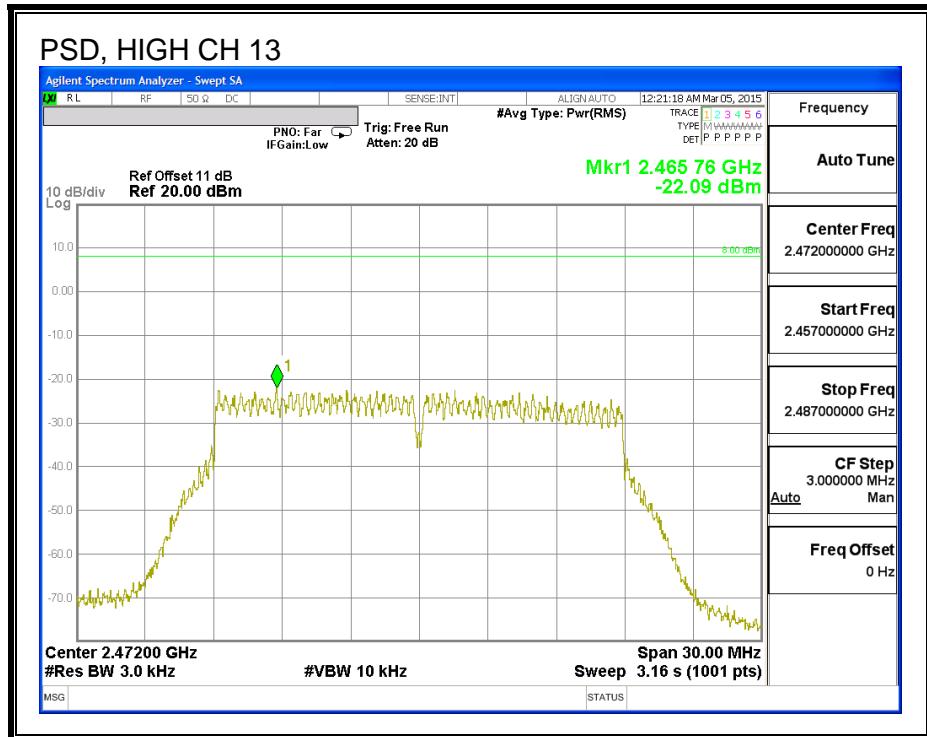

8.6.6. OUT-OF-BAND EMISSIONS


LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL


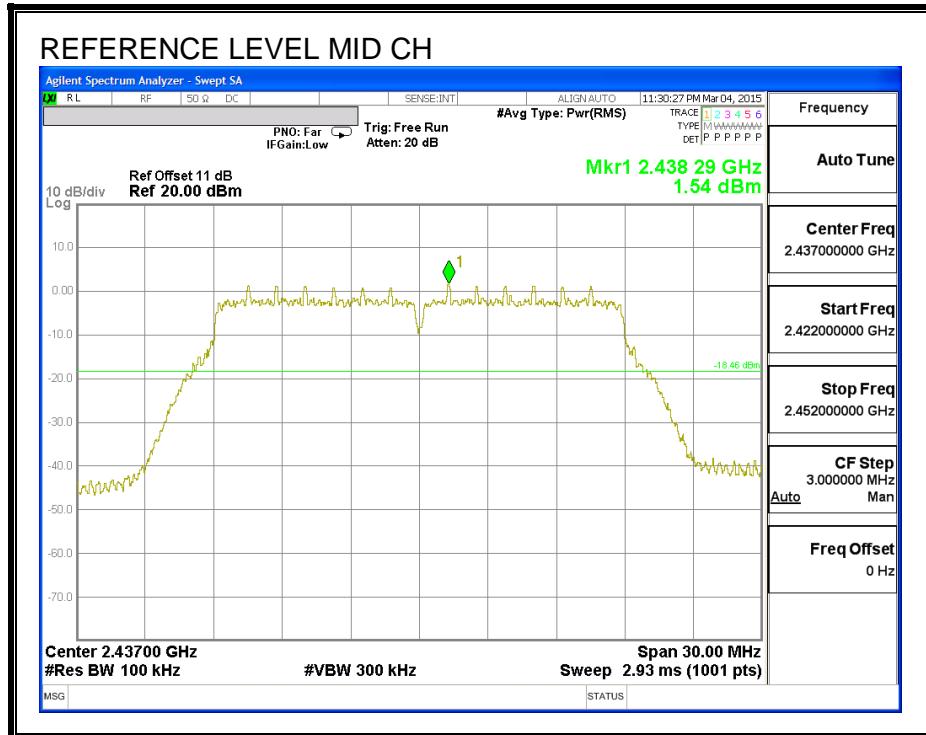


LOW CHANNEL BANDEDGE


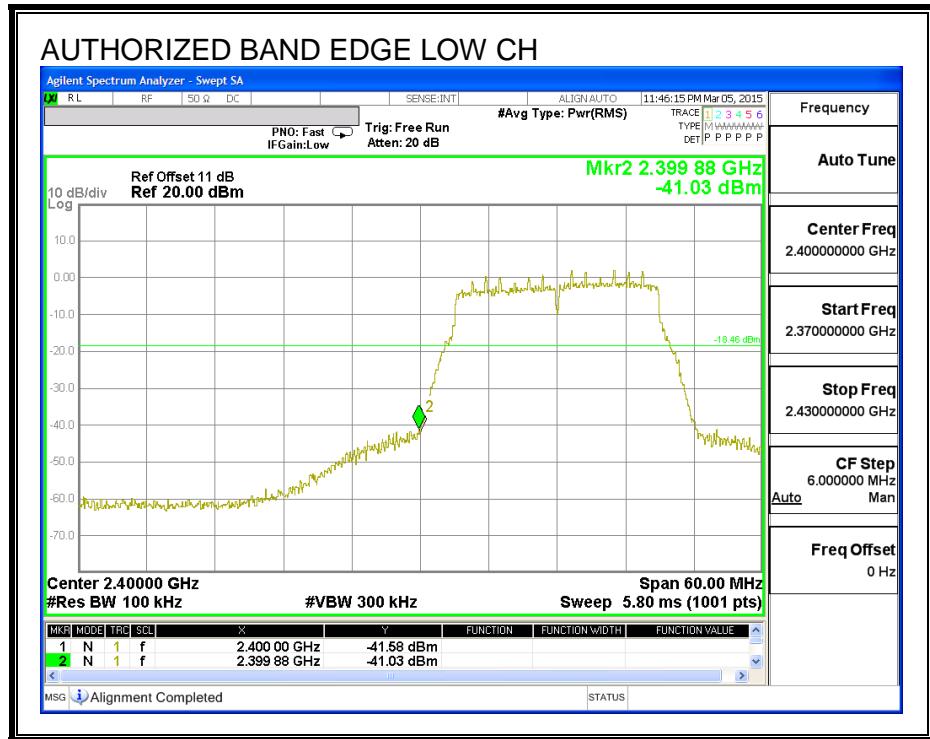




HIGH CHANNEL BANDEDGE

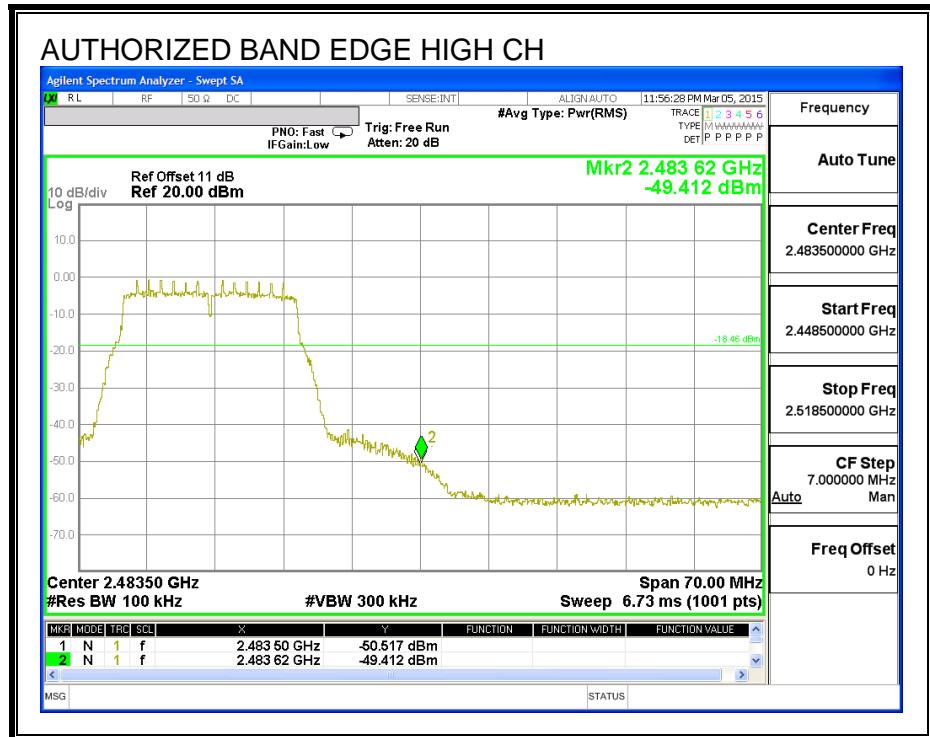


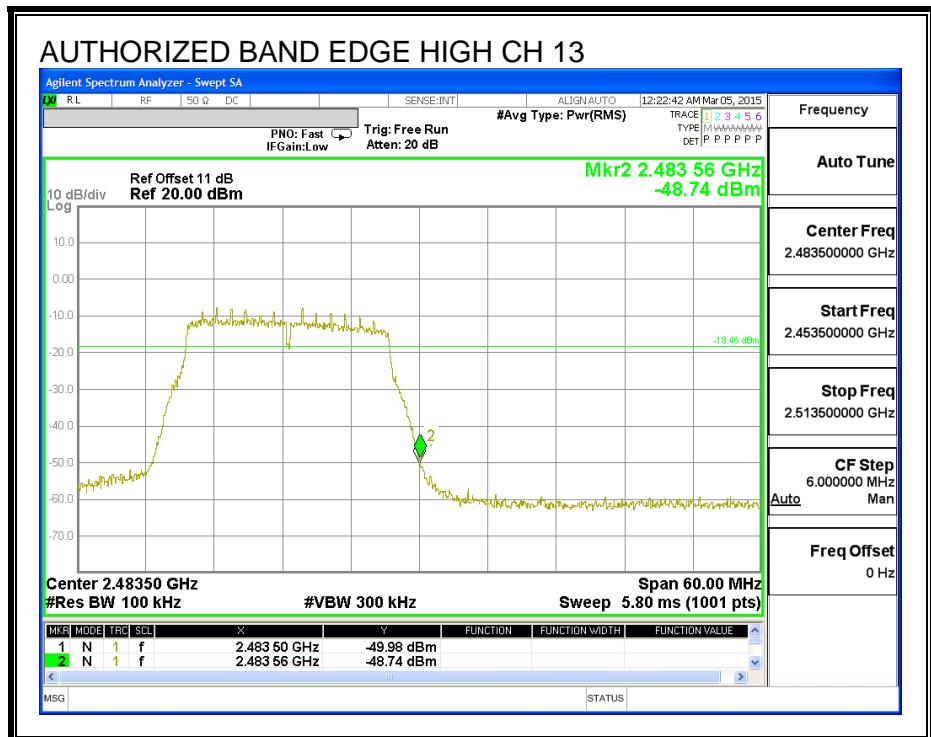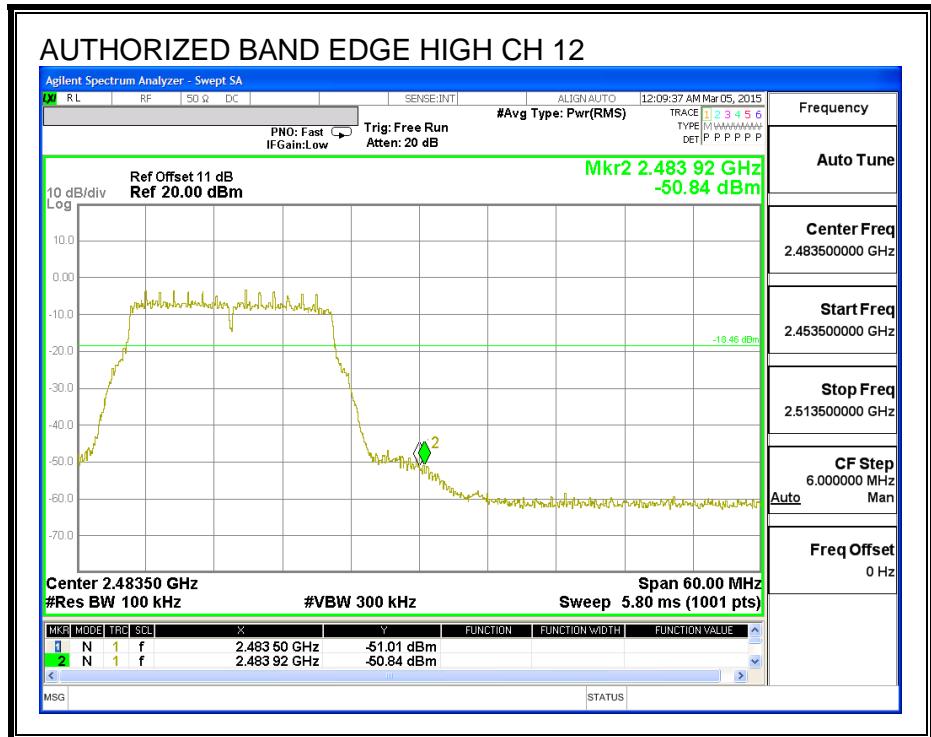

OUT-OF-BAND EMISSIONS

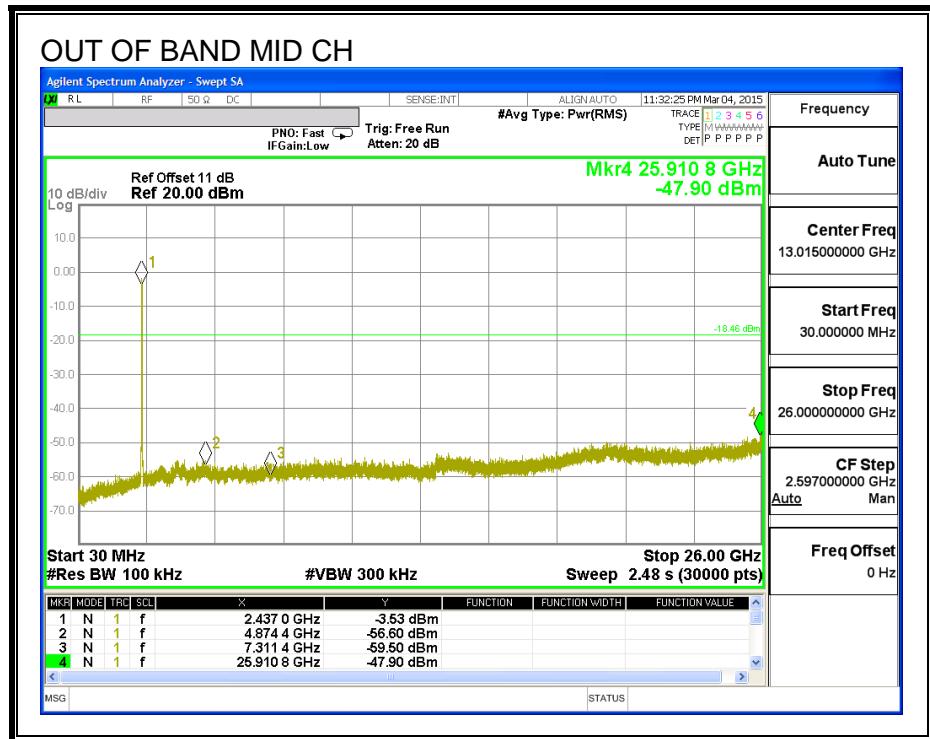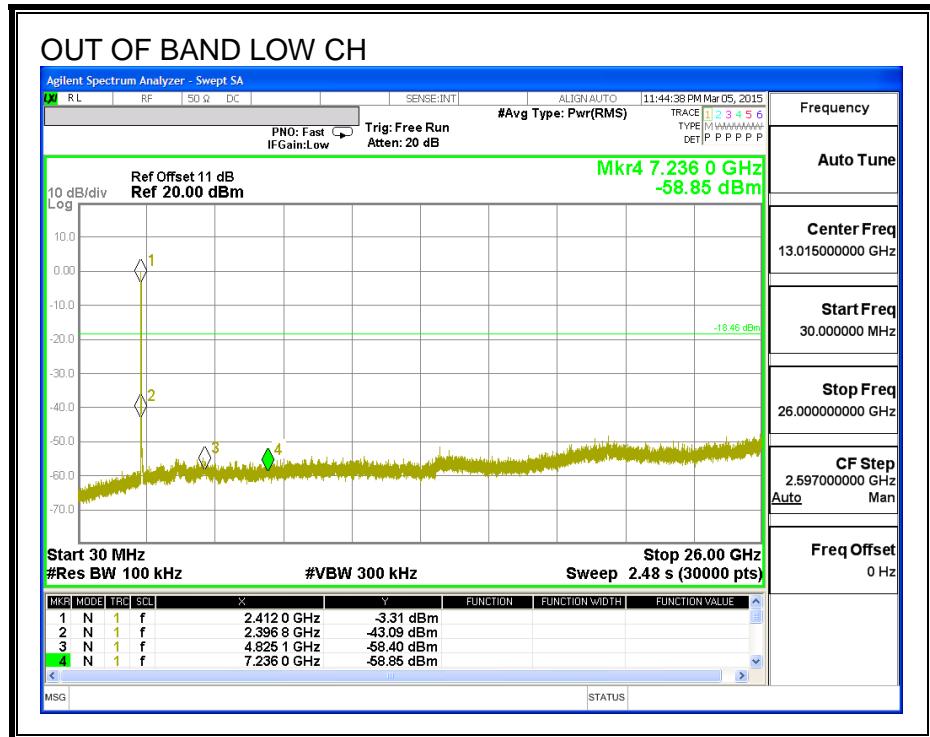

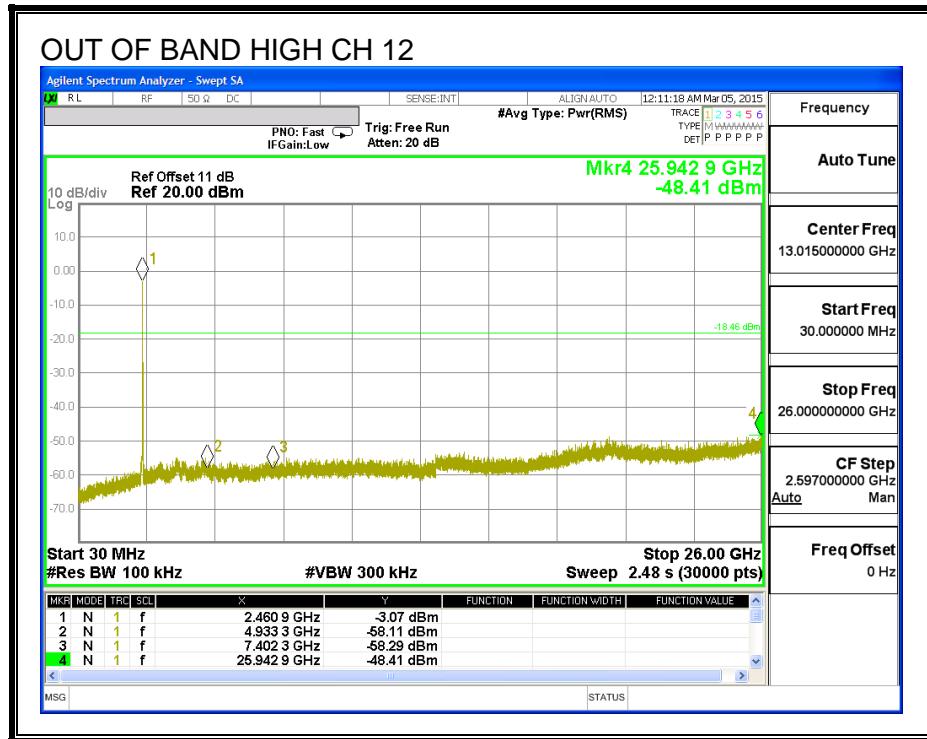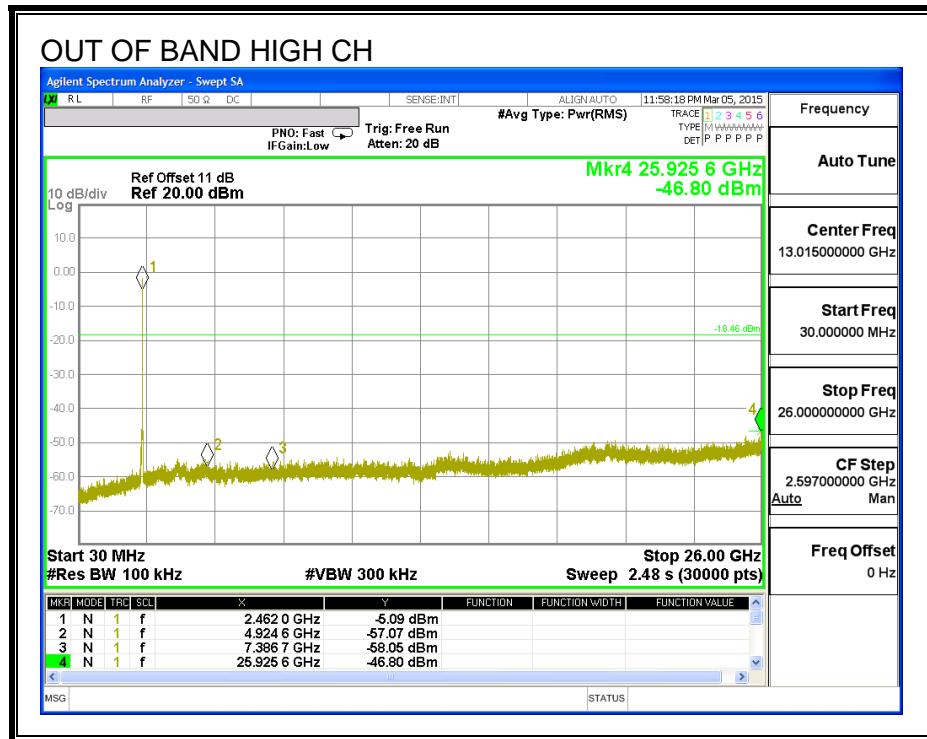

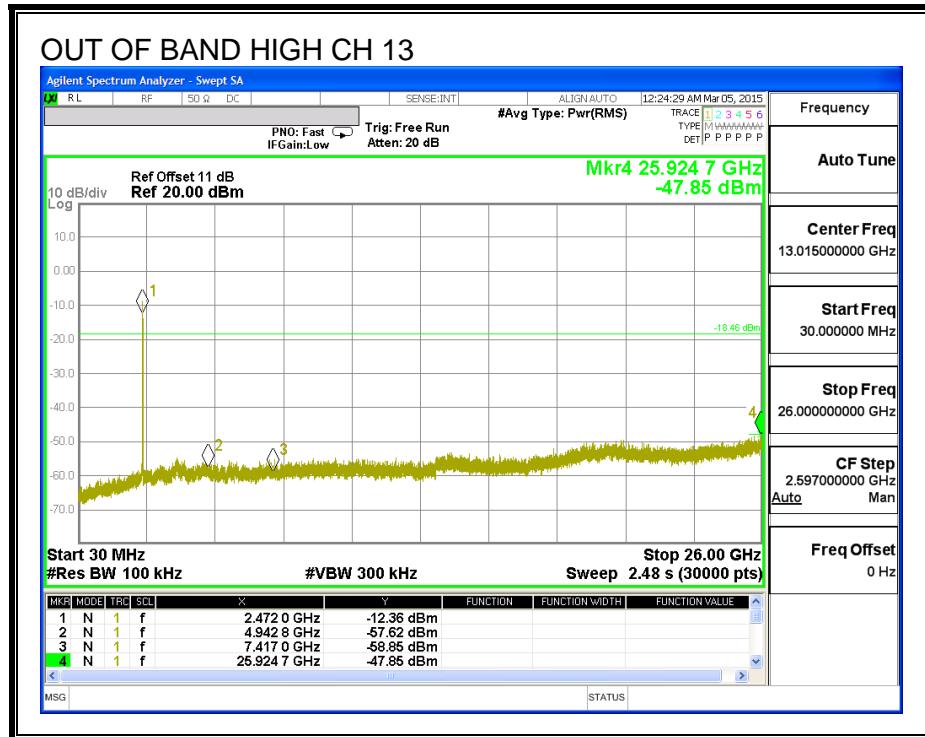

8.7. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA B & A)

8.7.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna B (MHz)	6 dB BW Antenna A (MHz)	Minimum Limit (MHz)
Low	2412	17.610	17.682	0.5
Mid	2437	17.670	17.682	0.5
High	2462	17.640	17.679	0.5
High	2467	17.640	17.630	0.5
High	2472	17.670	17.630	0.5


6 dB BANDWIDTH, ANTENNA B

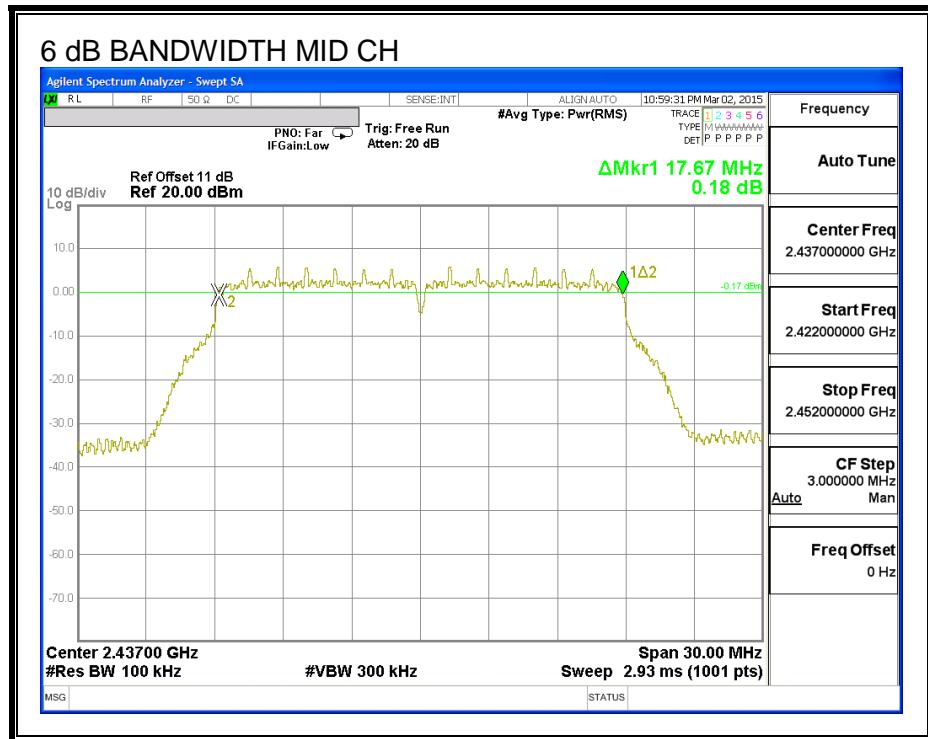
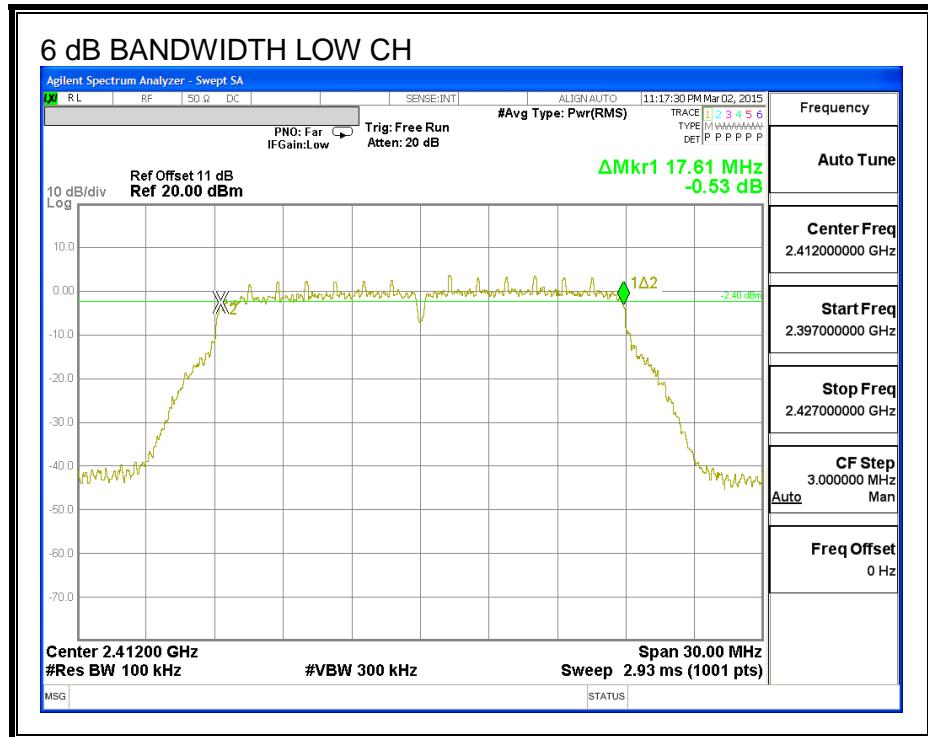


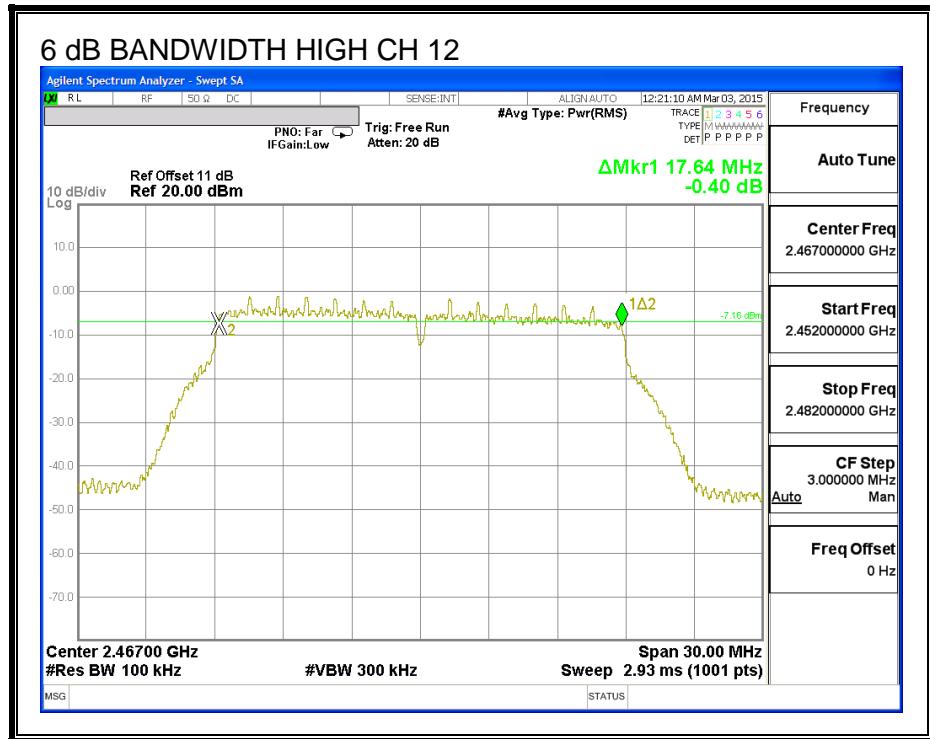
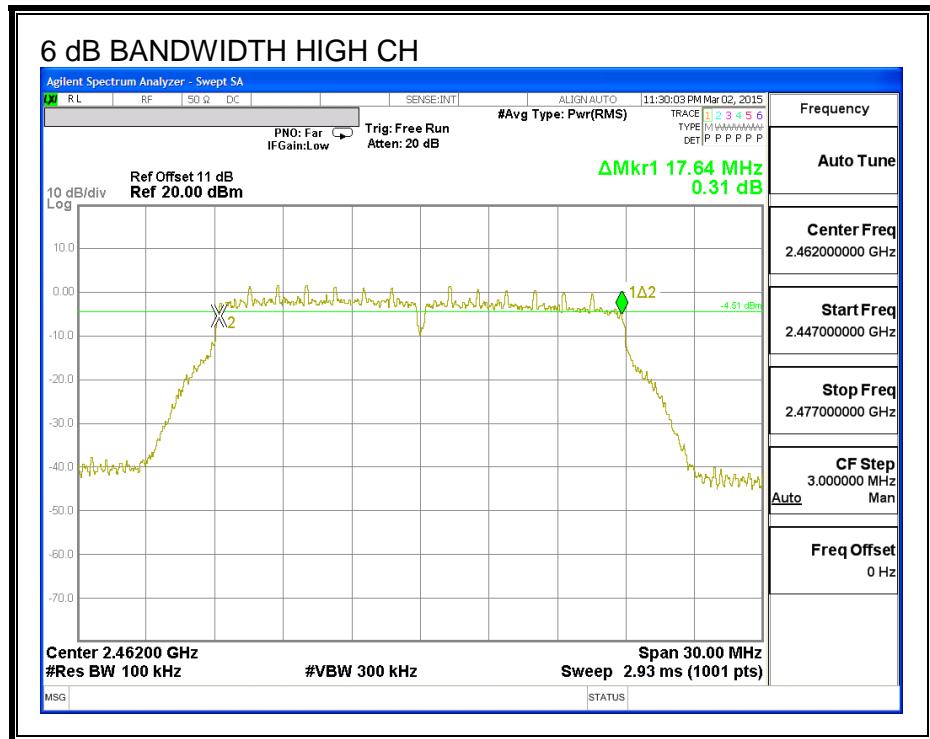


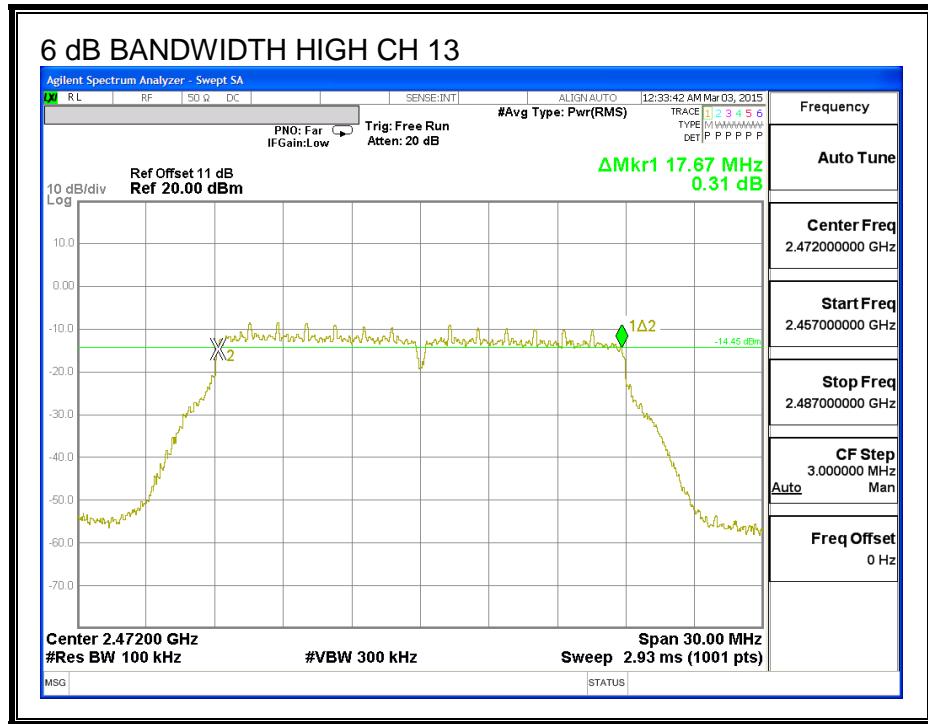

6 dB BANDWIDTH, ANTENNA A

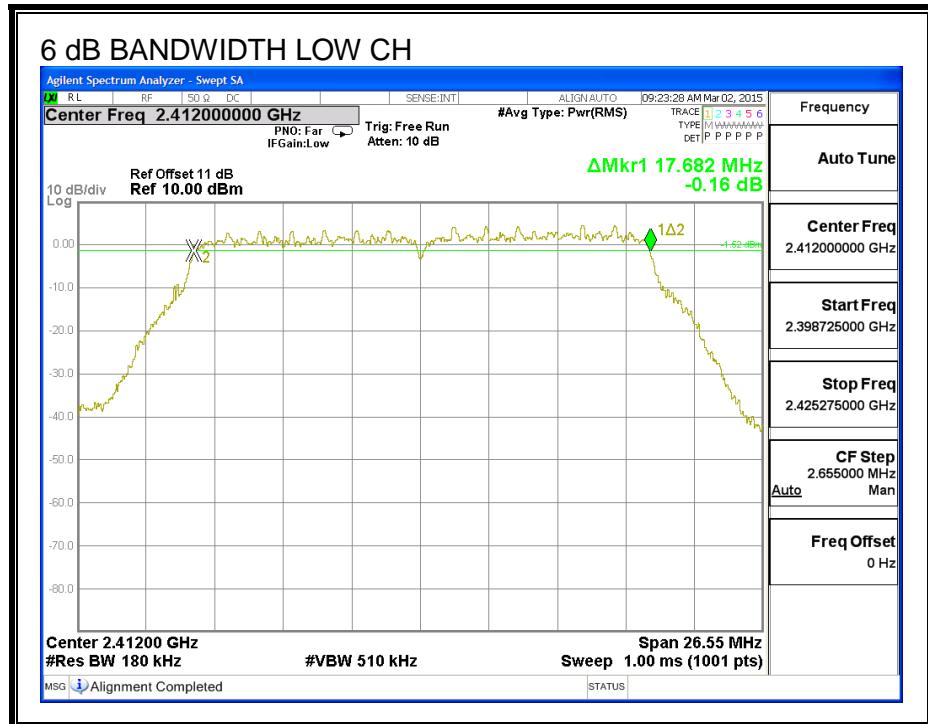

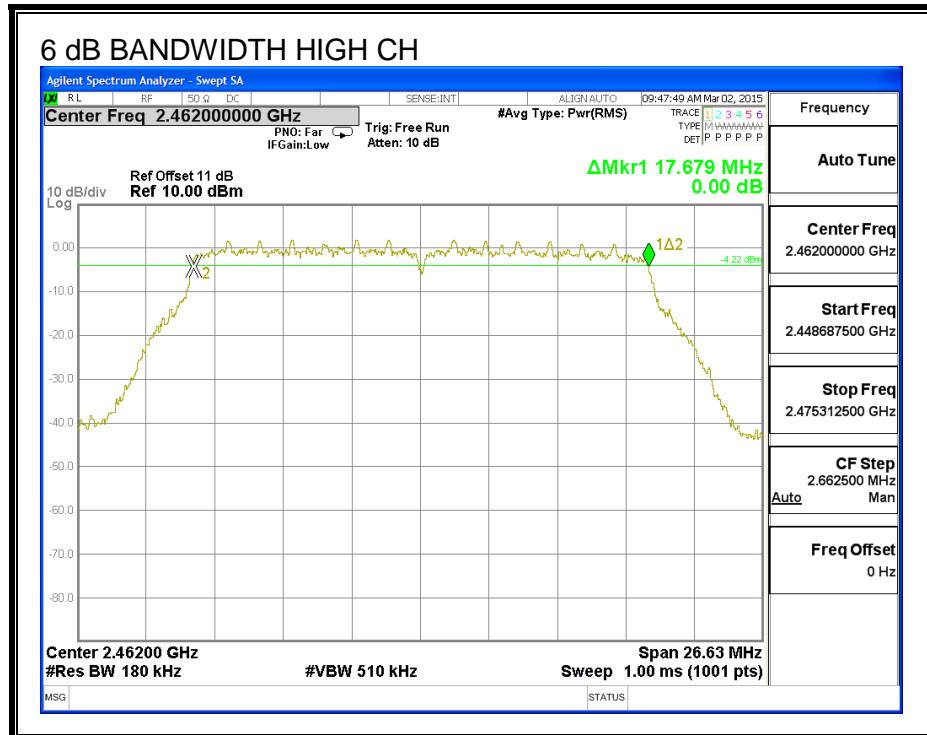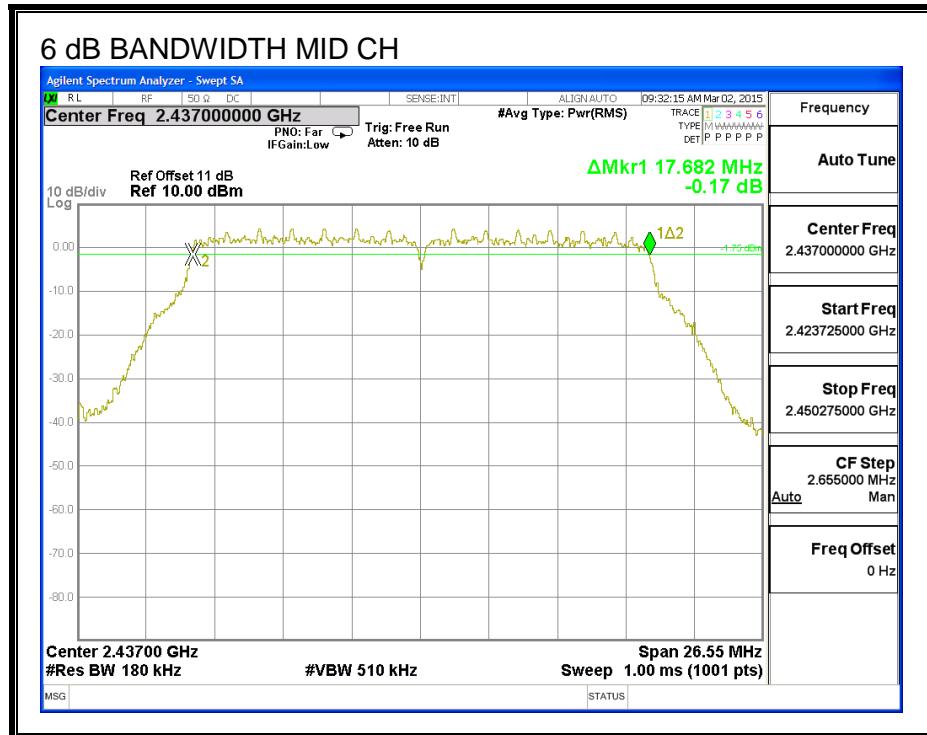

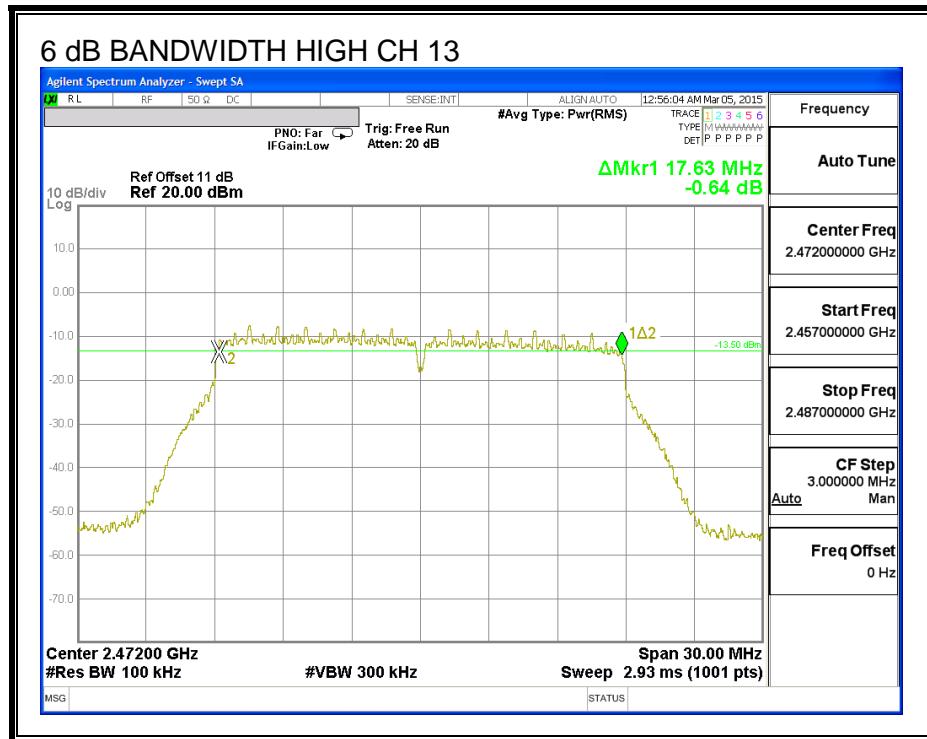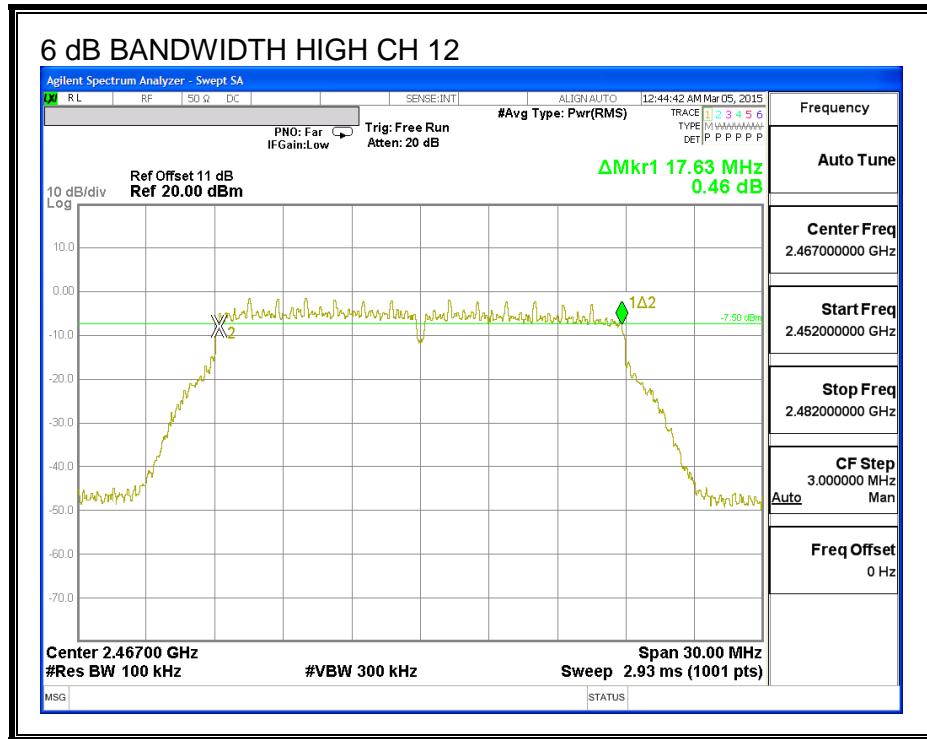

8.7.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz) Antenna B	99% Bandwidth (MHz) Antenna A
Low	2412	17.689	17.725
Mid	2437	17.699	17.680
High	2462	17.725	17.713
High	2467	17.633	17.720
High	2472	17.783	17.705



99% BANDWIDTH ANTENNA B

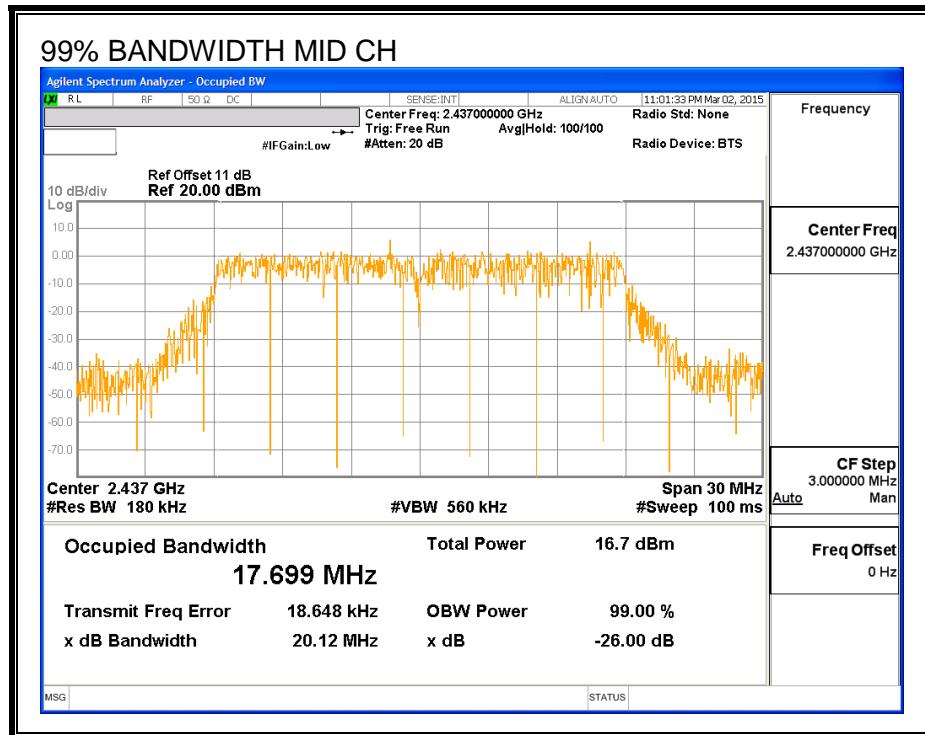
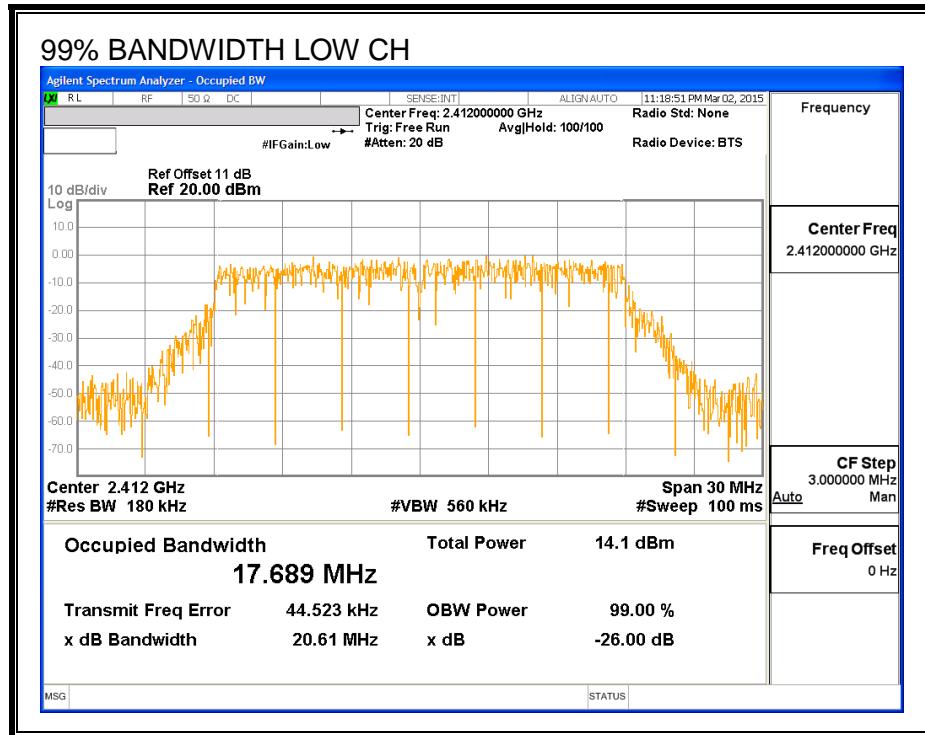


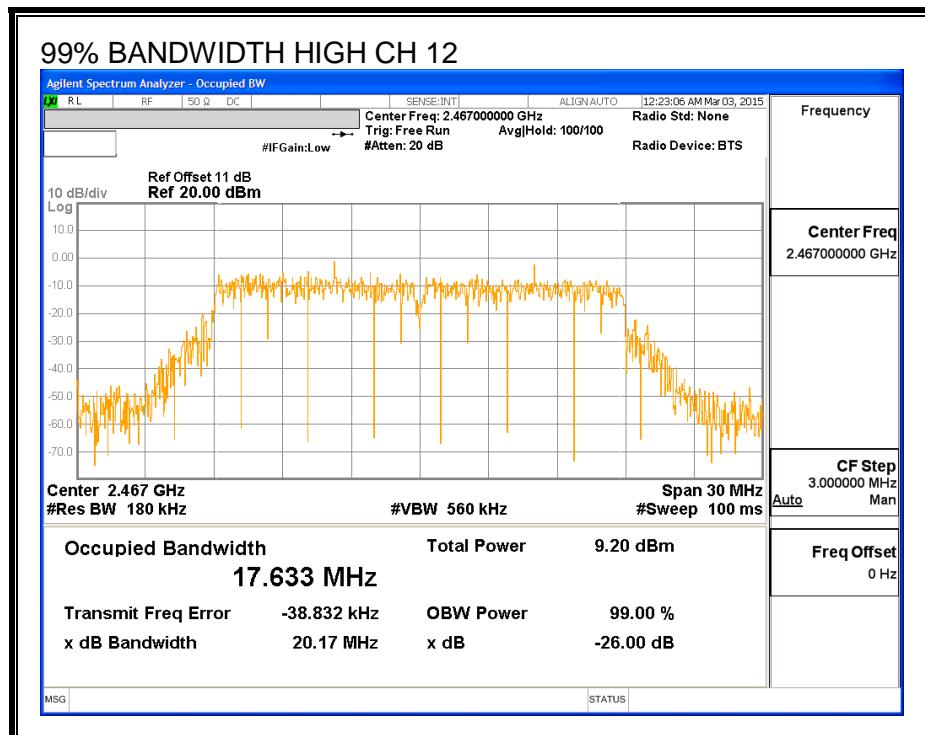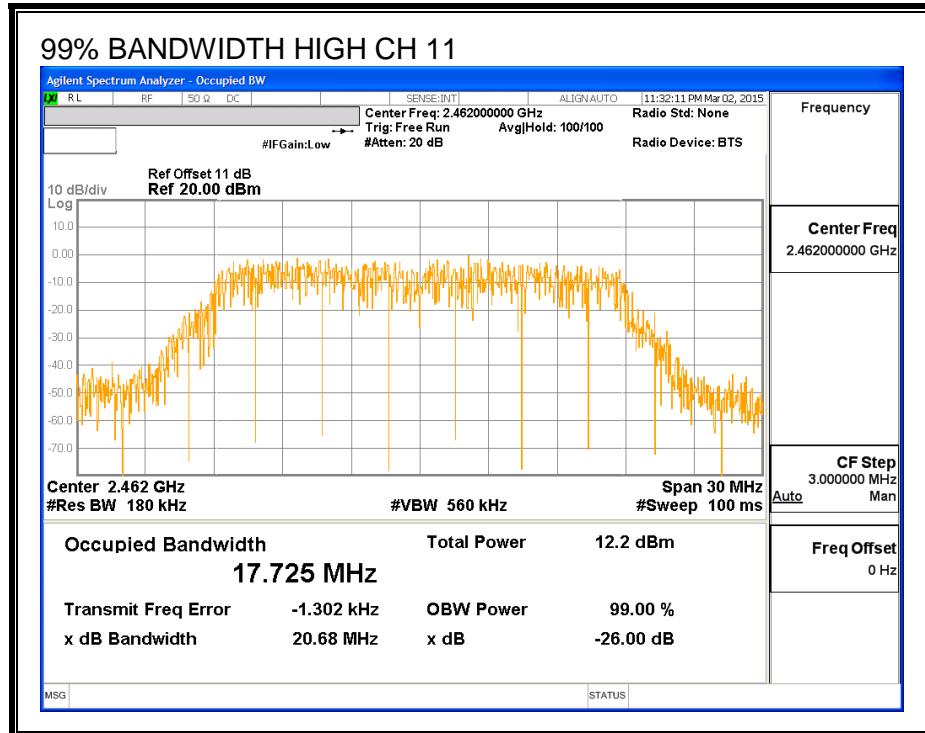


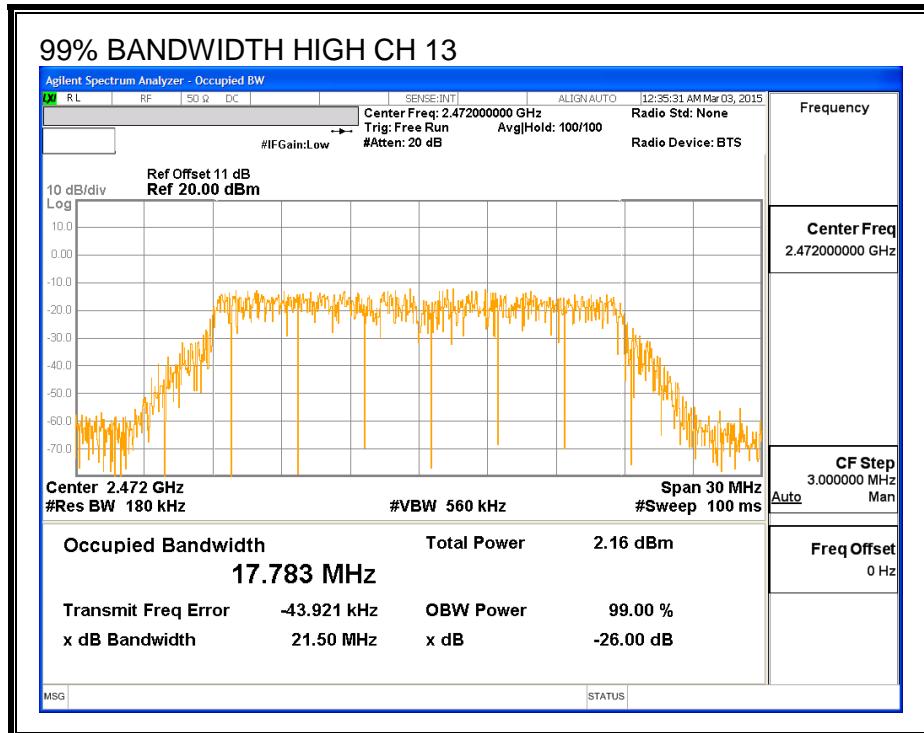

99% BANDWIDTH ANTENNA A

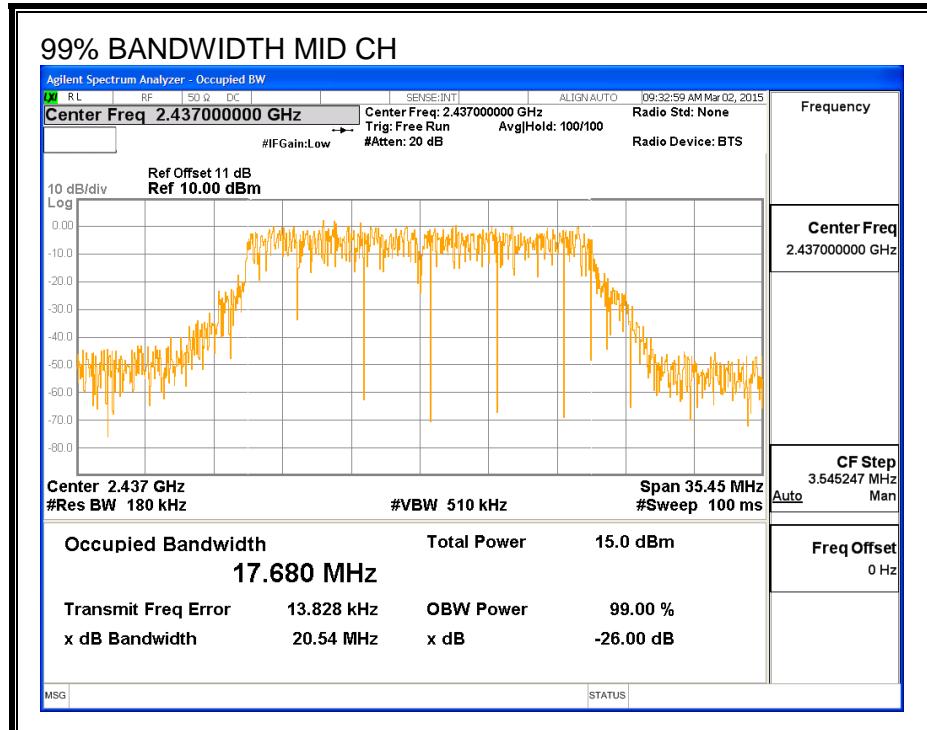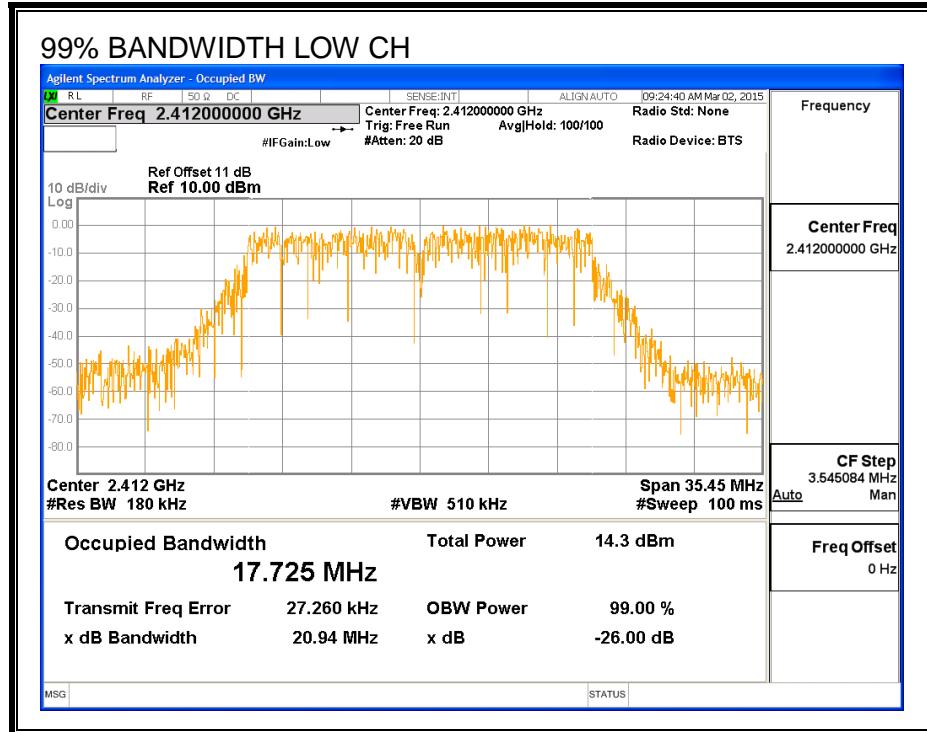

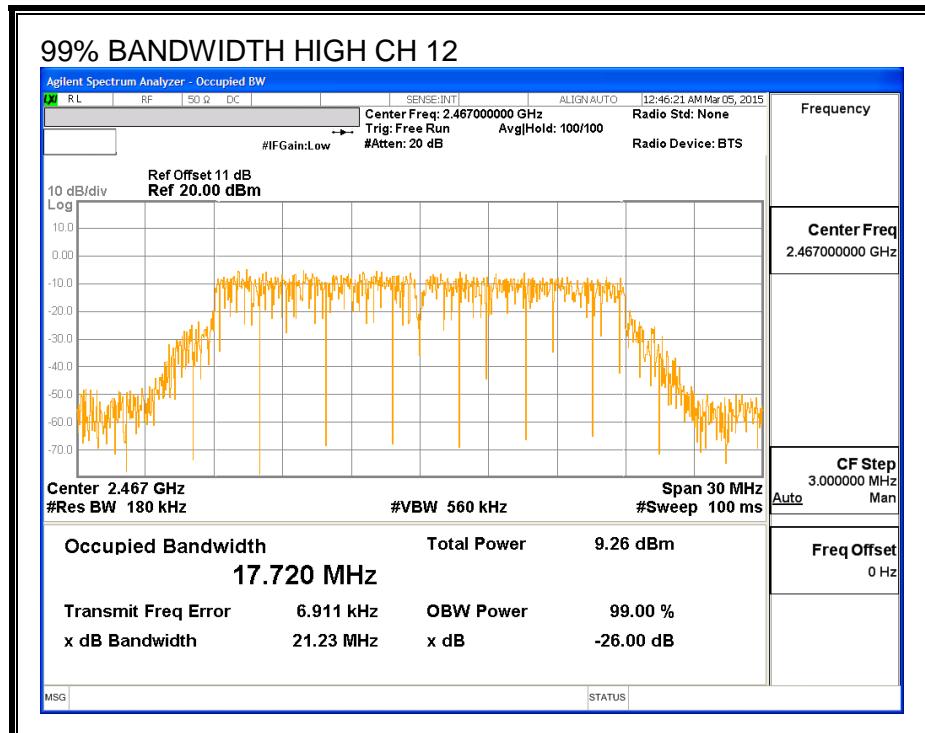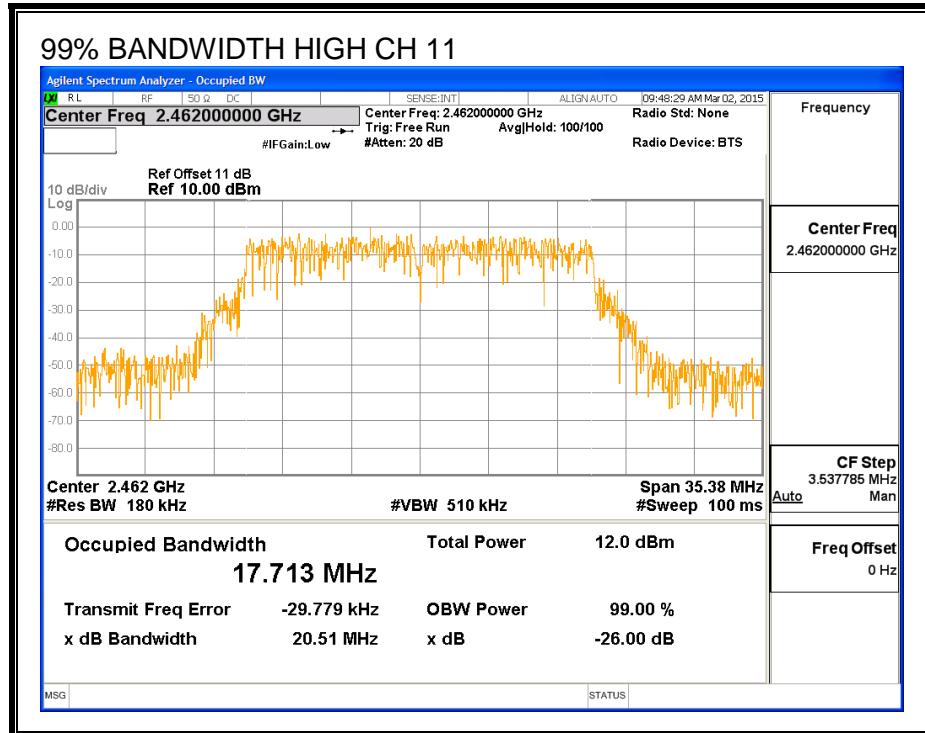

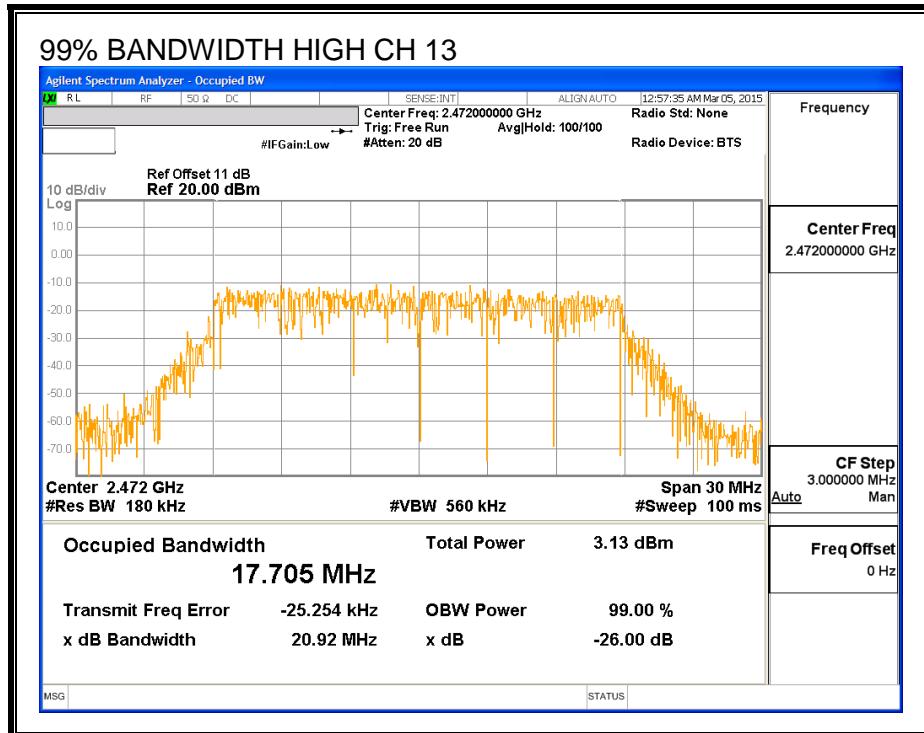

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	2412	13.97	13.88	16.94
Mid	2437	16.46	14.96	18.78
High	2462	11.92	11.99	14.97
High	2467	8.91	8.97	11.95
High	2472	2.94	2.99	5.98

8.7.4. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna B	Antenna A	Uncorrelated Chains
Antenna Gain (dBi)	Antenna Gain (dBi)	Directional Gain (dBi)
-1.00	0.20	-0.36

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-0.36	30.00	30	36	30.00
Mid	2437	-0.36	30.00	30	36	30.00
High	2462	-0.36	30.00	30	36	30.00
High	2467	-0.36	30.00	30	36	30.00
High	2472	-0.36	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margi n (dB)
Low	2412	23.25	23.16	26.22	30.00	-3.78
Mid	2437	24.84	23.96	27.43	30.00	-2.57
High	2462	20.36	20.19	23.29	30.00	-6.71
High	2467	17.36	18.21	20.82	30.00	-9.18
High	2472	10.09	10.22	13.17	30.00	-16.83

8.7.5. PSD

LIMITS



FCC §15.247



RESULTS


PSD Results

Channel	Frequency (MHz)	Antenna B Meas (dBm)	Antenna A Meas (dBm)	Total PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.75	-12.10	-8.36	8.0	-16.4
Mid	2437	-8.36	-11.71	-6.71	8.0	-14.7
High	2462	-13.24	-12.64	-9.92	8.0	-17.9
High	2467	-15.67	-16.11	-12.87	8.0	-20.9
High	2472	-22.90	-20.92	-18.79	8.0	-26.8


PSD, ANTENNA B

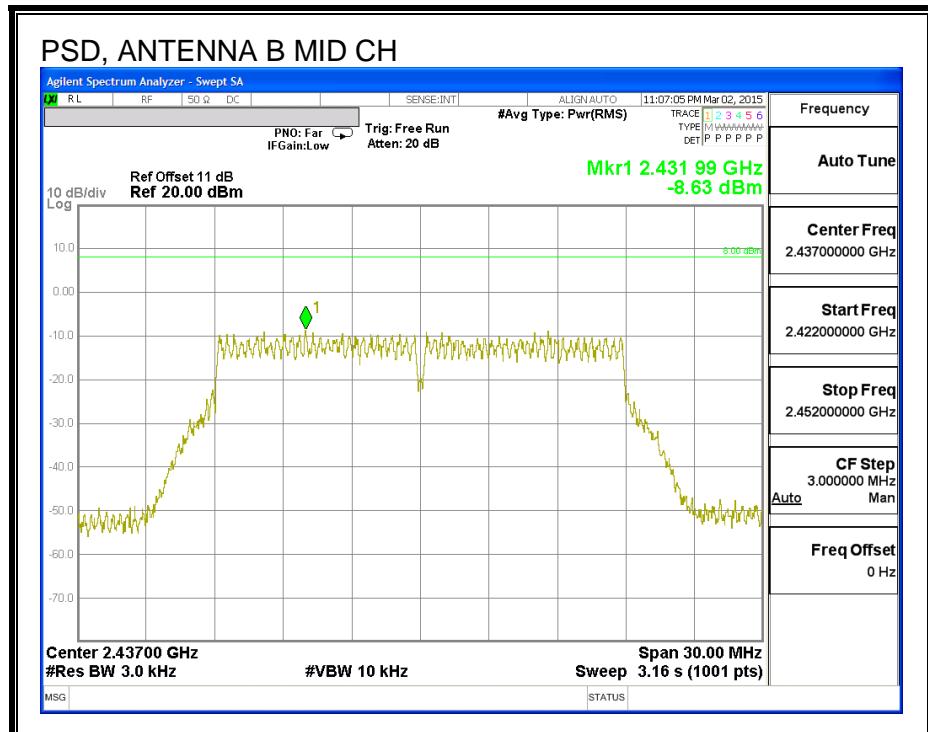
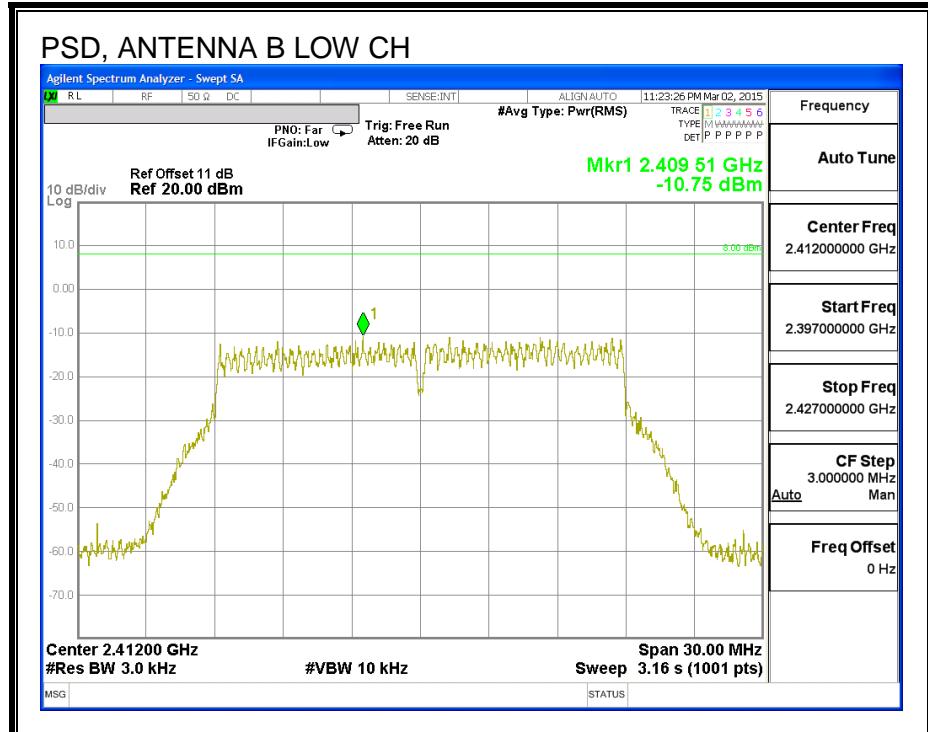


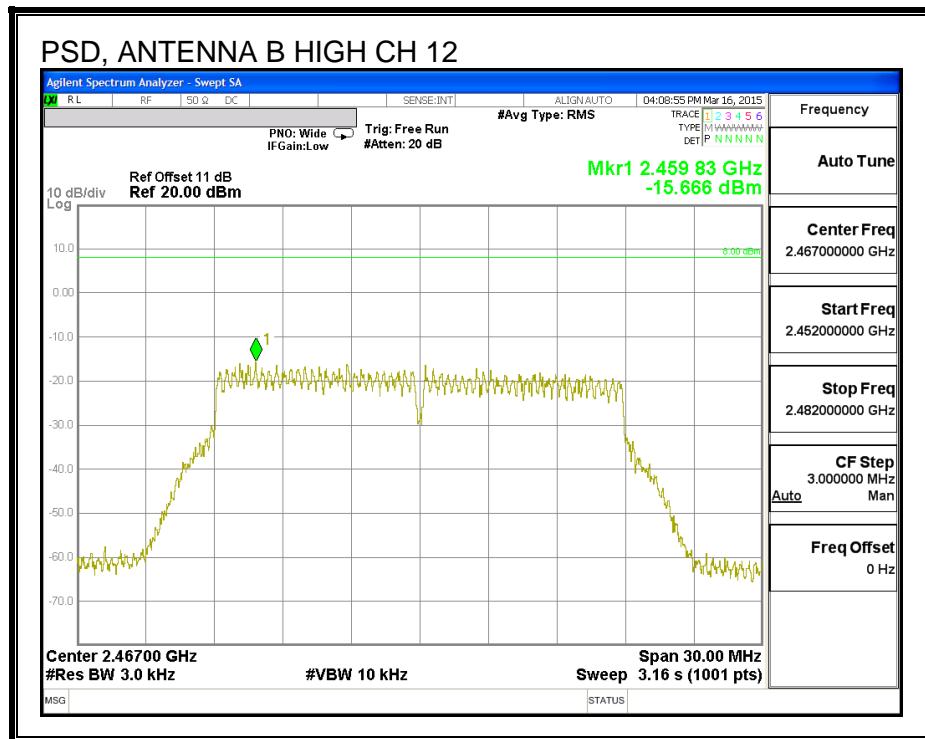
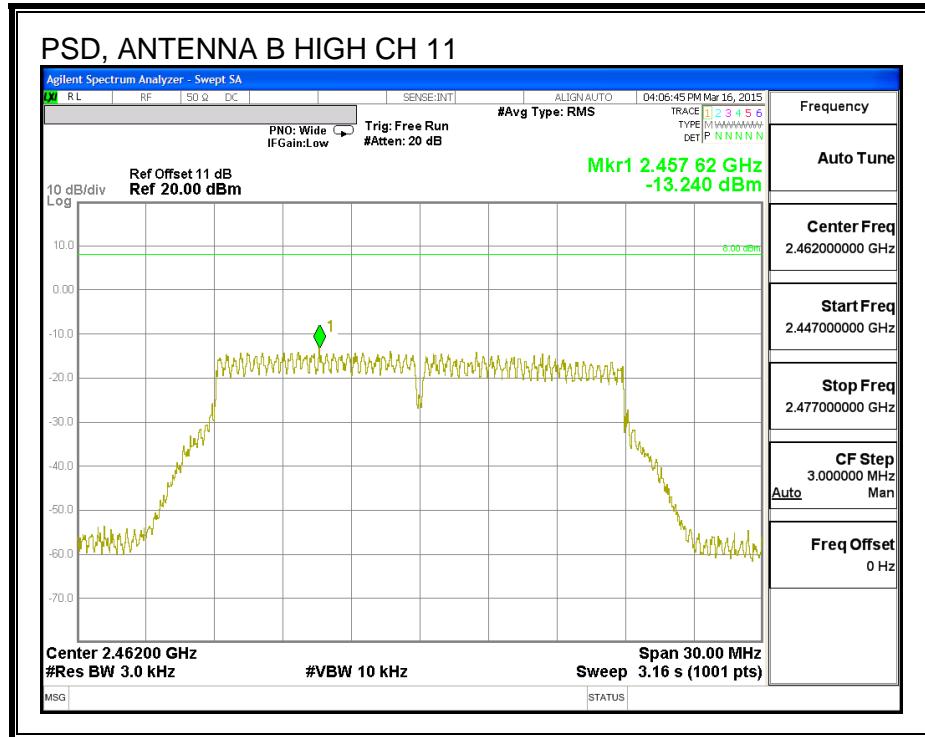


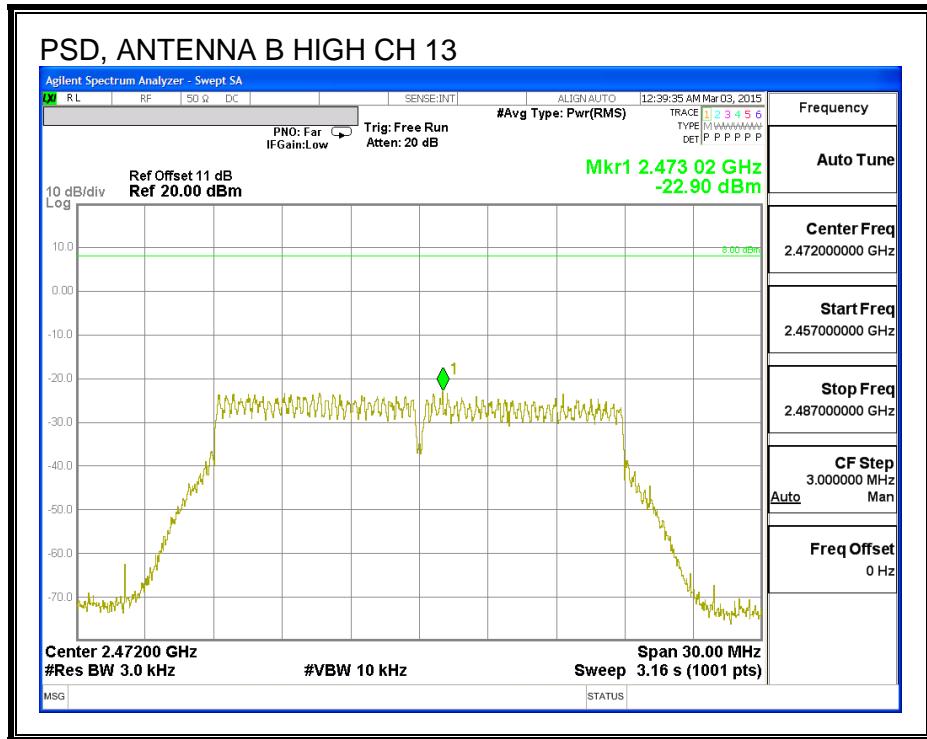

PSD, ANTENNA A

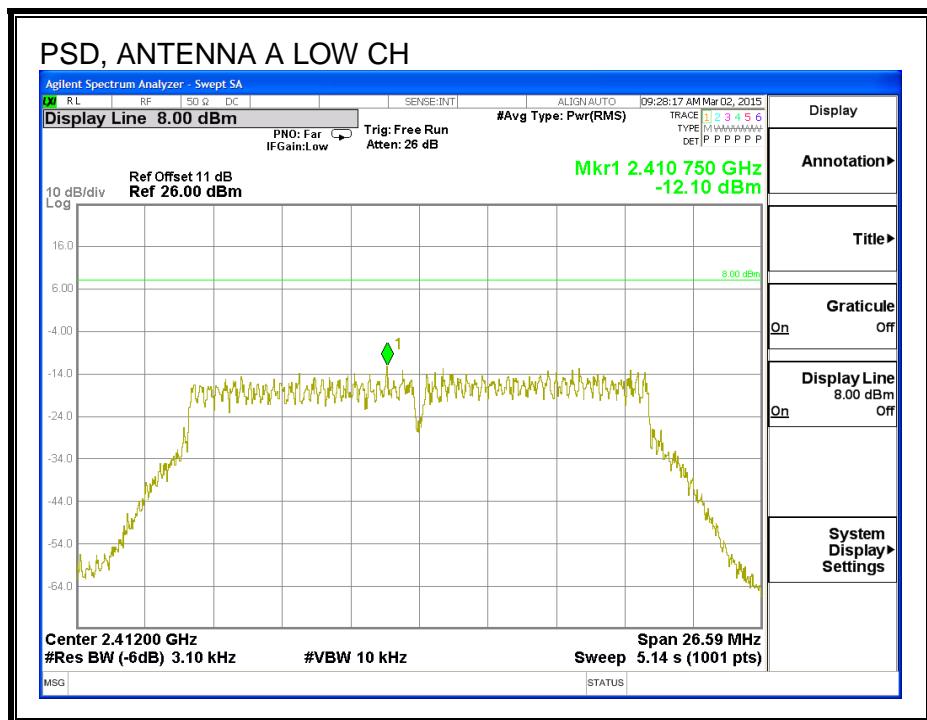

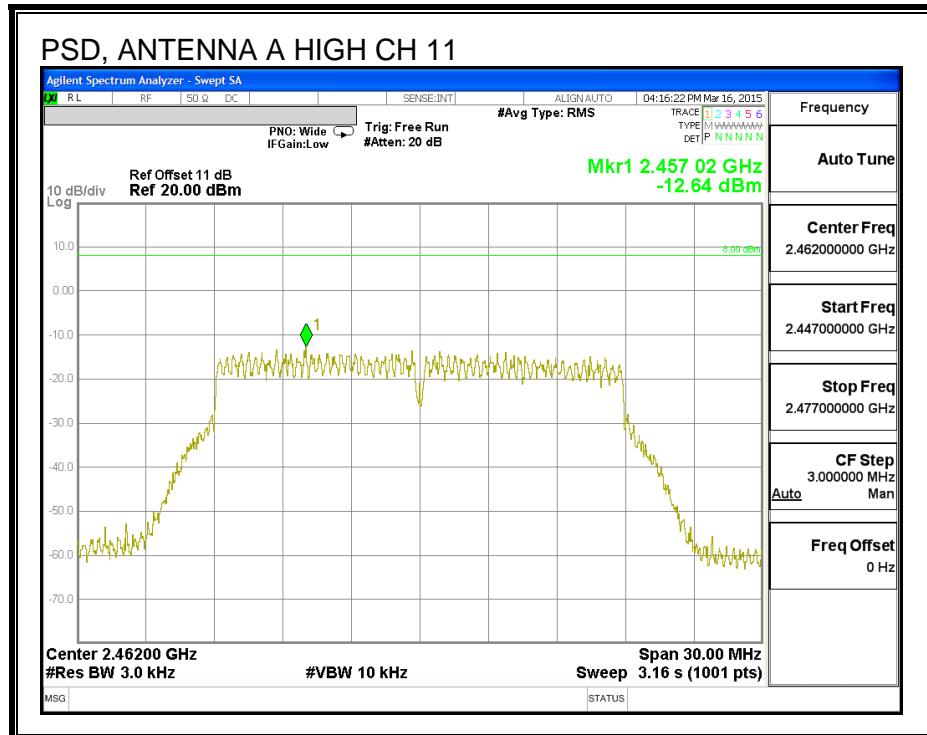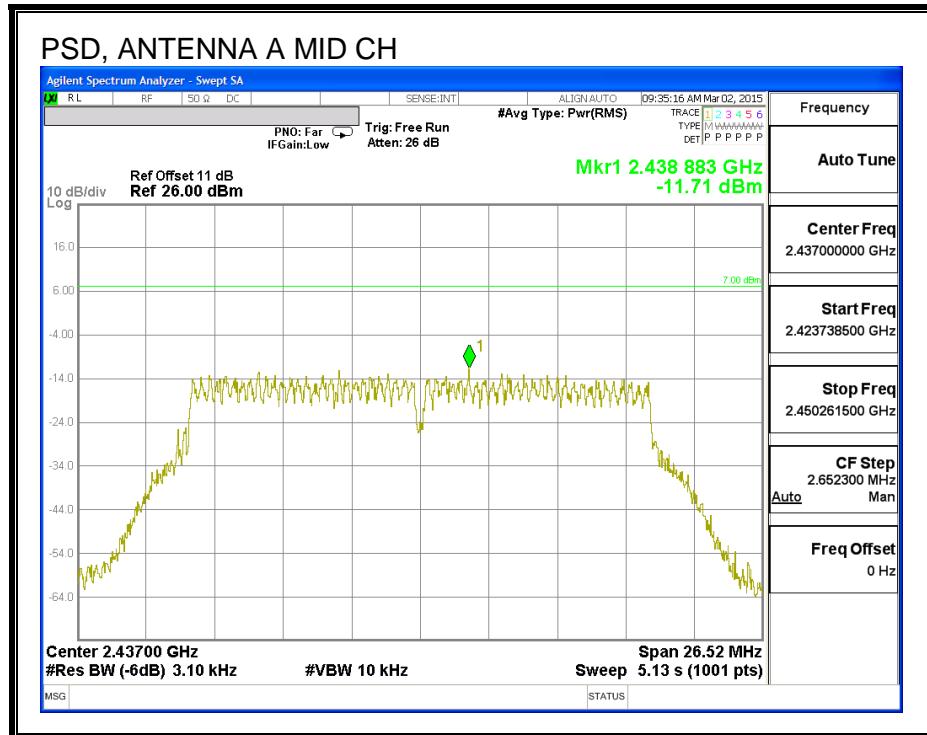

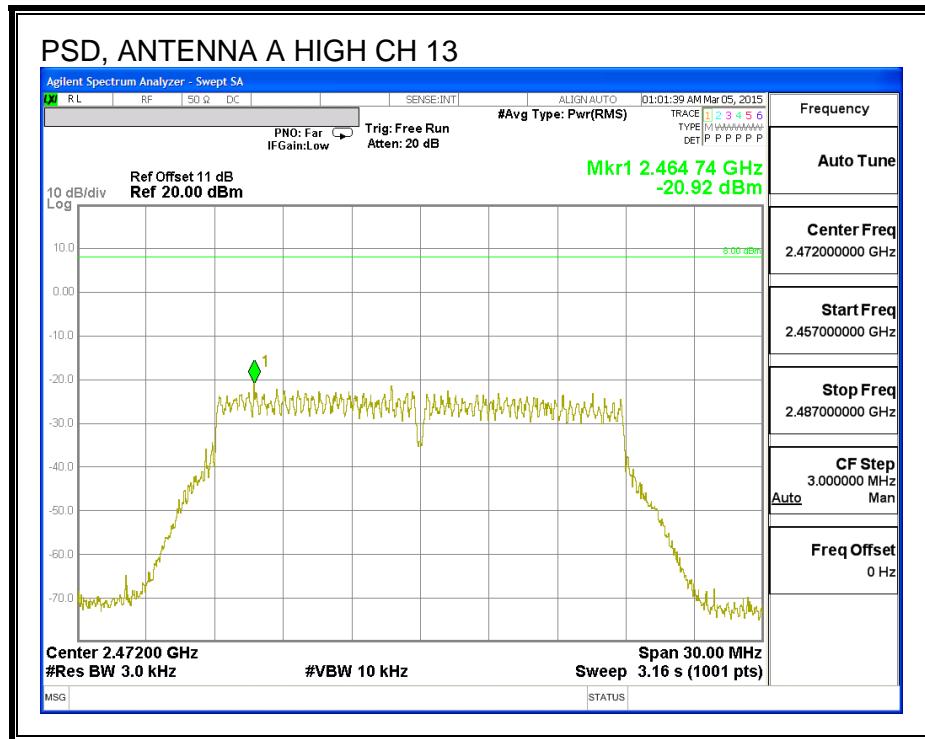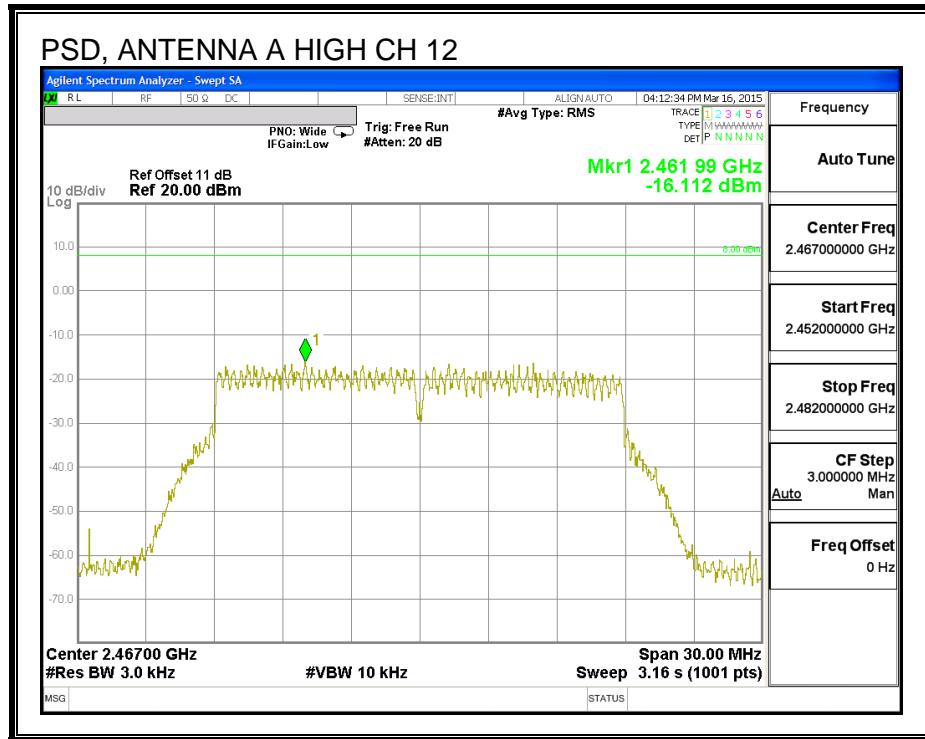

8.7.6. OUT-OF-BAND EMISSIONS


LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, ANTENNA B


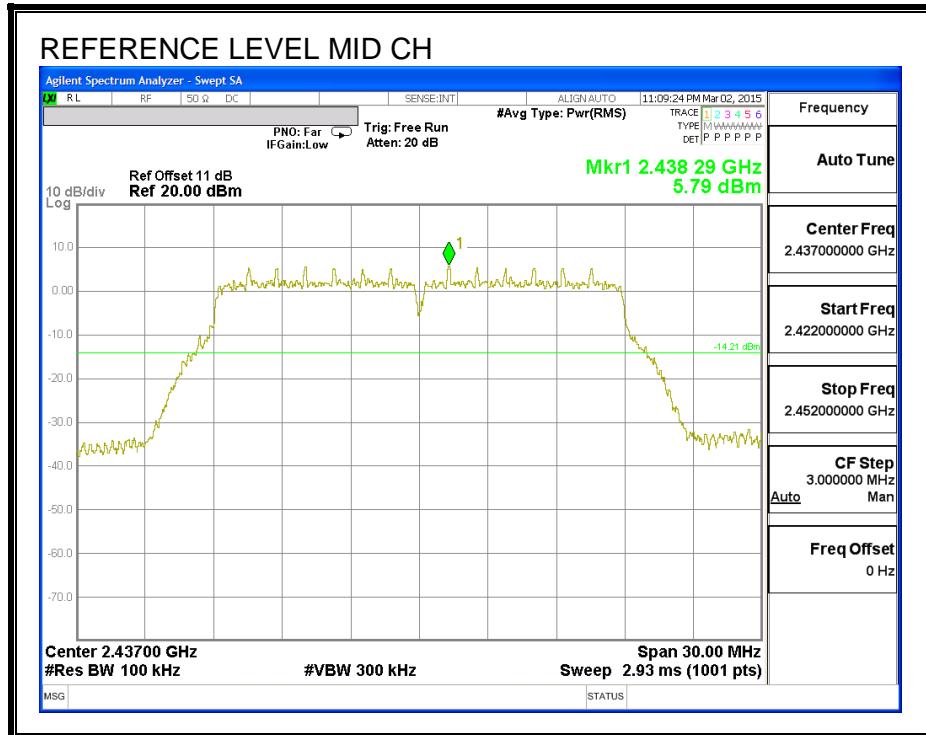


LOW CHANNEL BANDEDGE, ANTENNA B


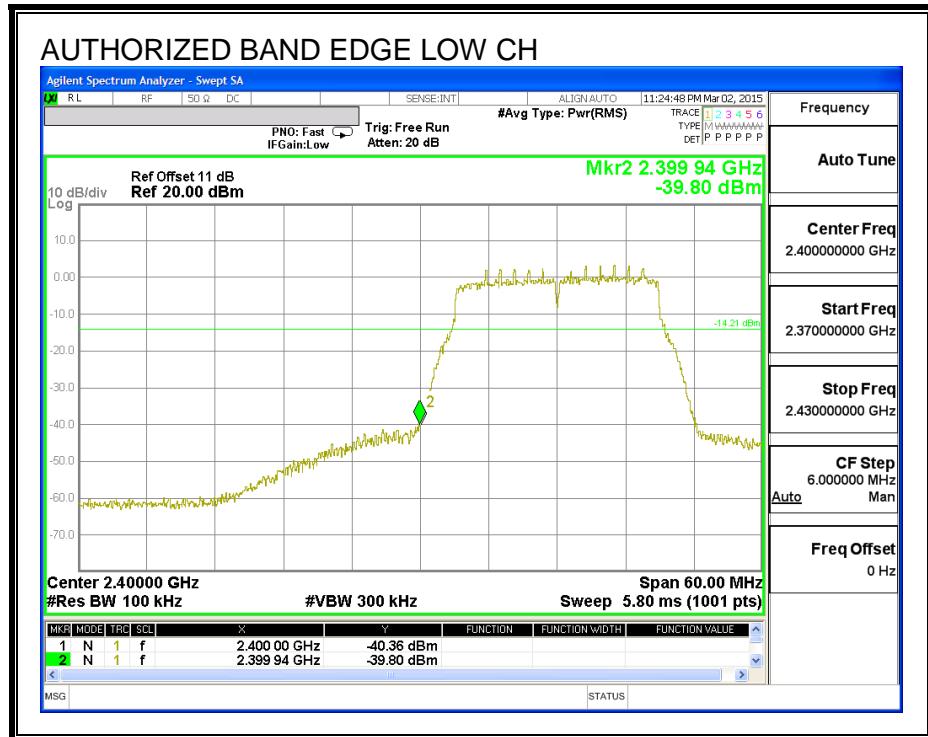




HIGH CHANNEL BANDEDGE, ANTENNA B

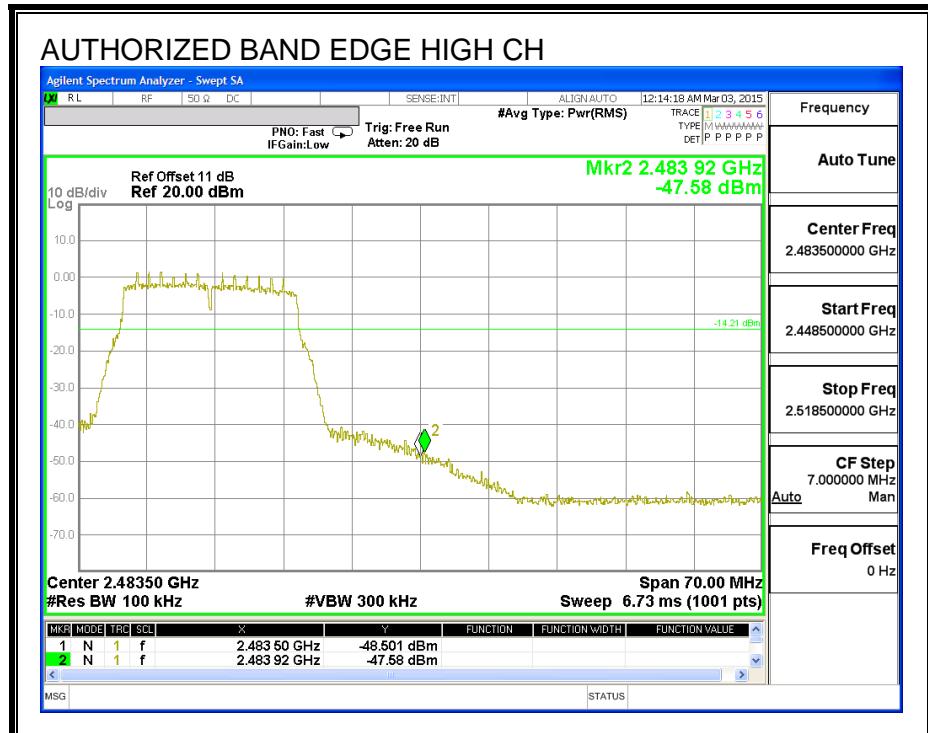


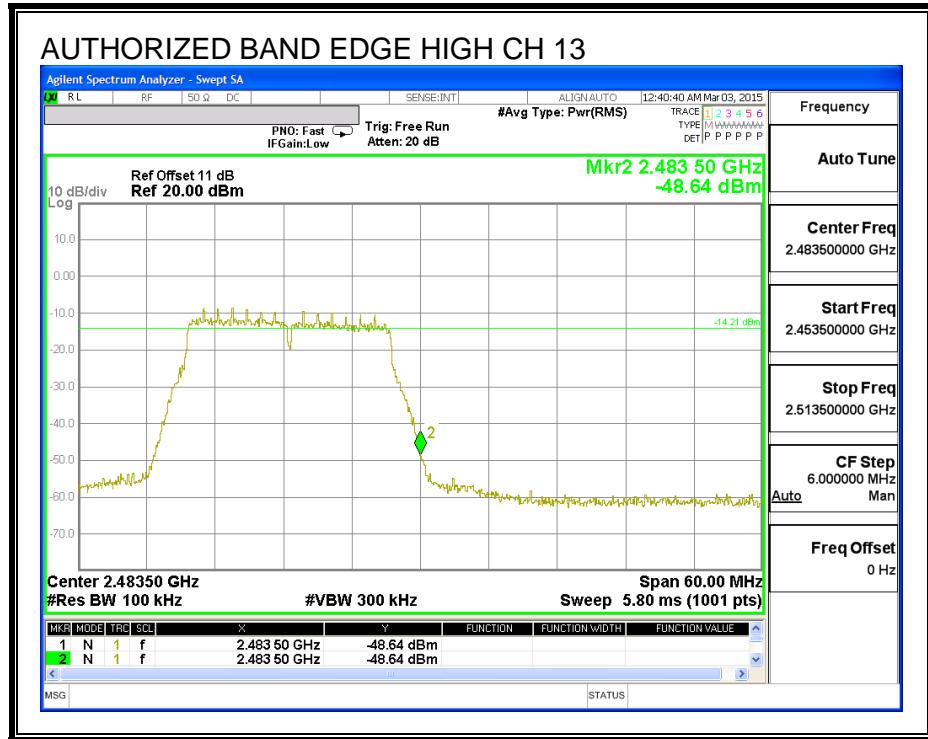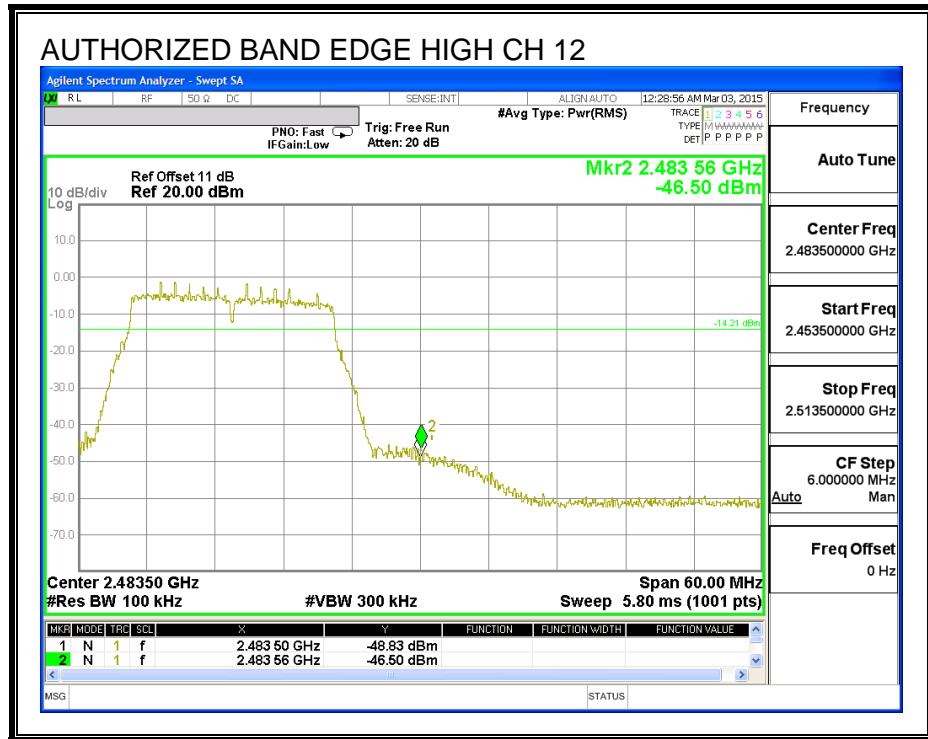


OUT-OF-BAND EMISSIONS, ANTENNA B

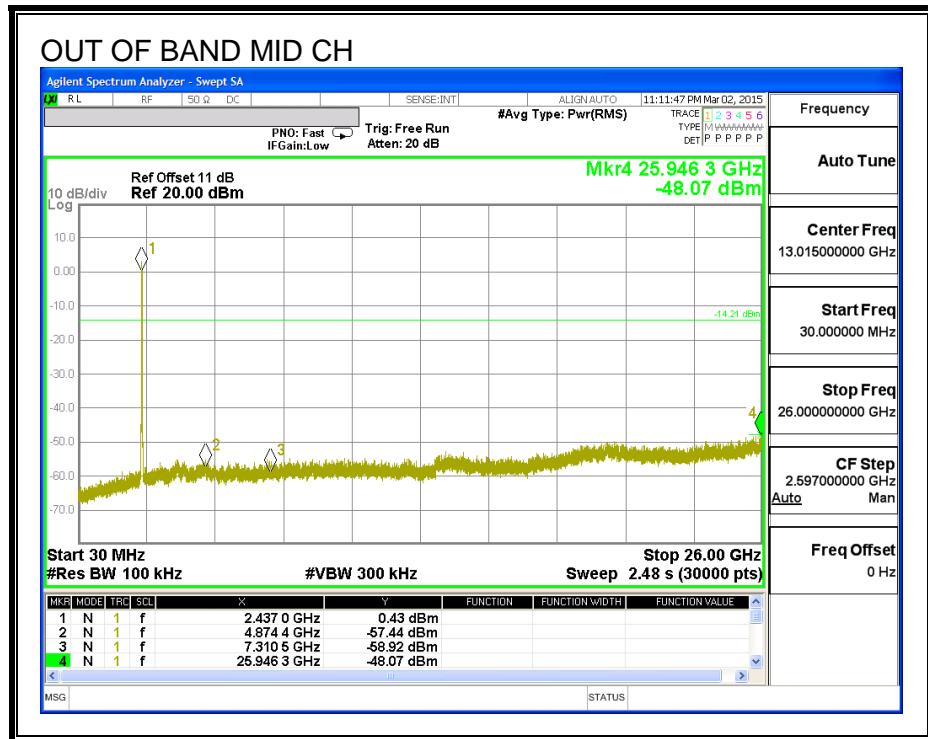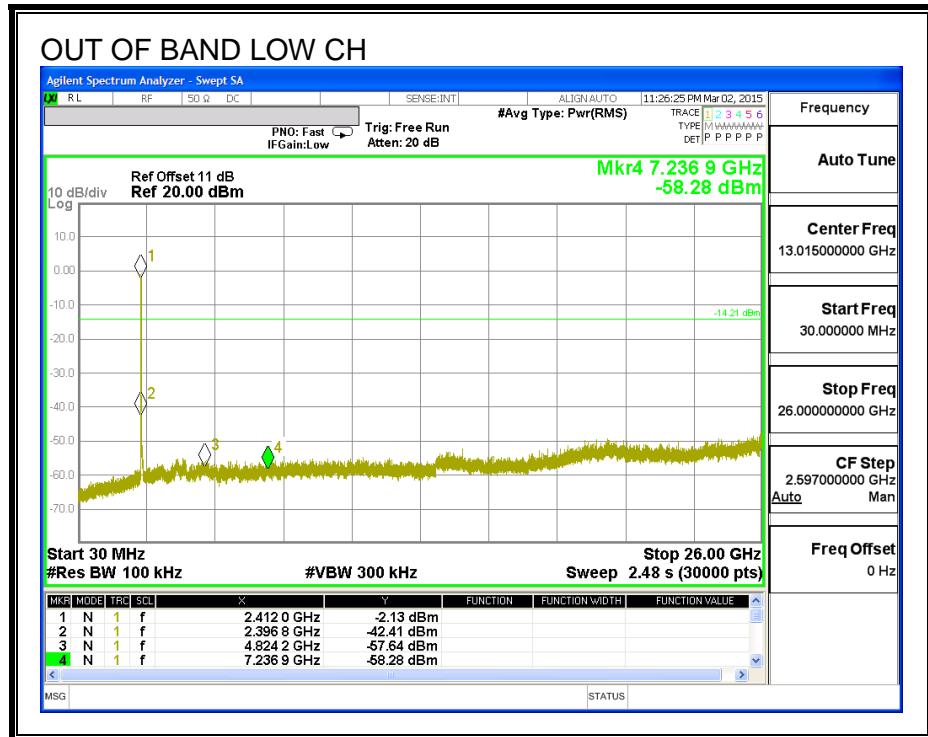

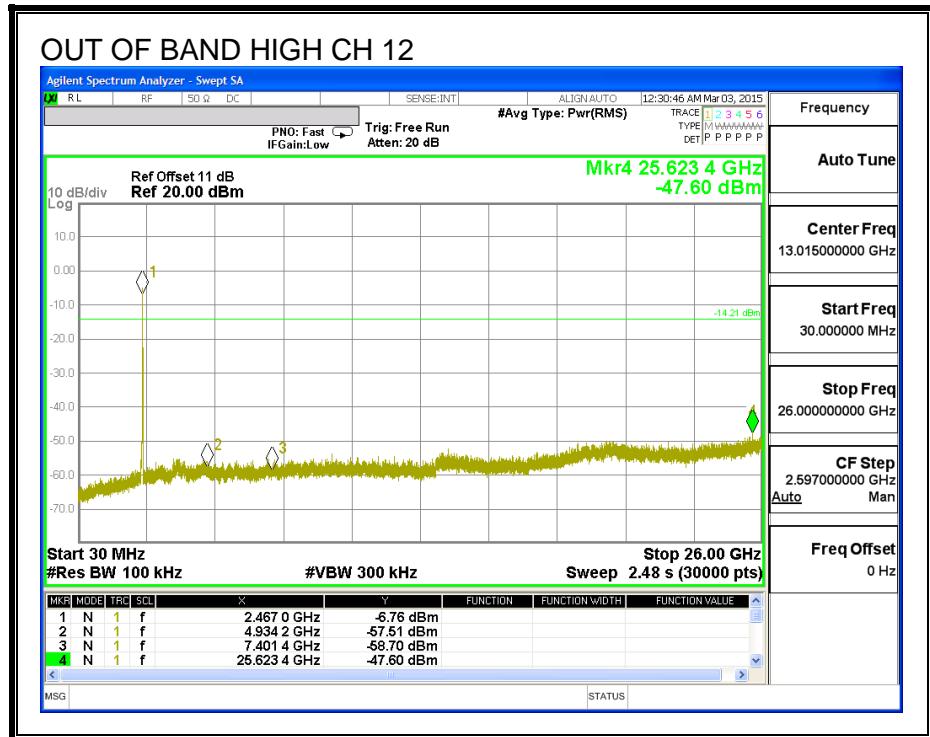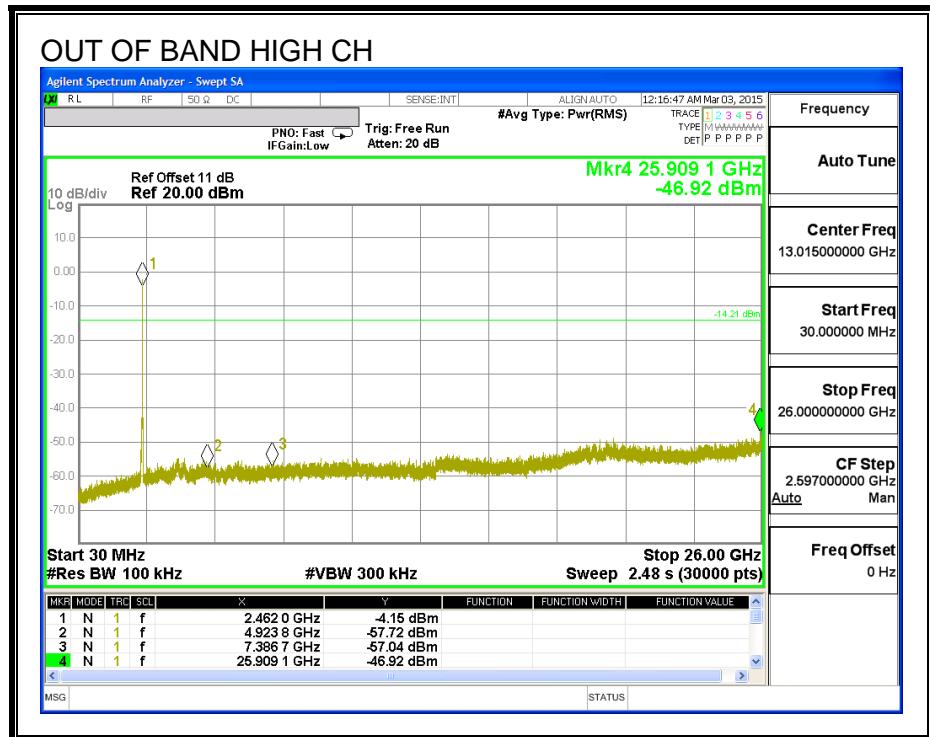


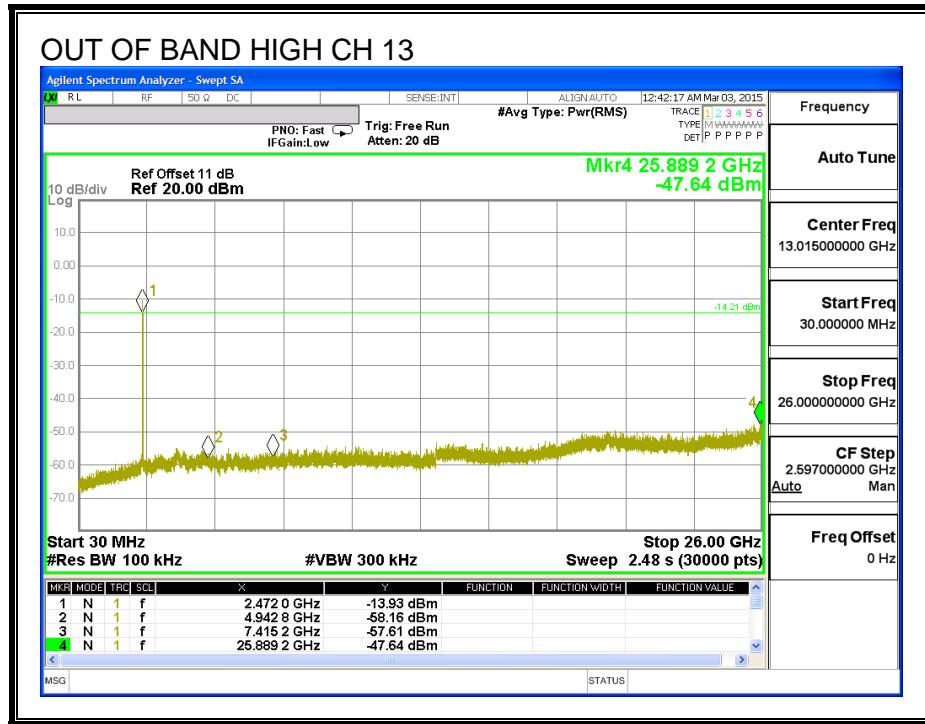


IN-BAND REFERENCE LEVEL, ANTENNA A


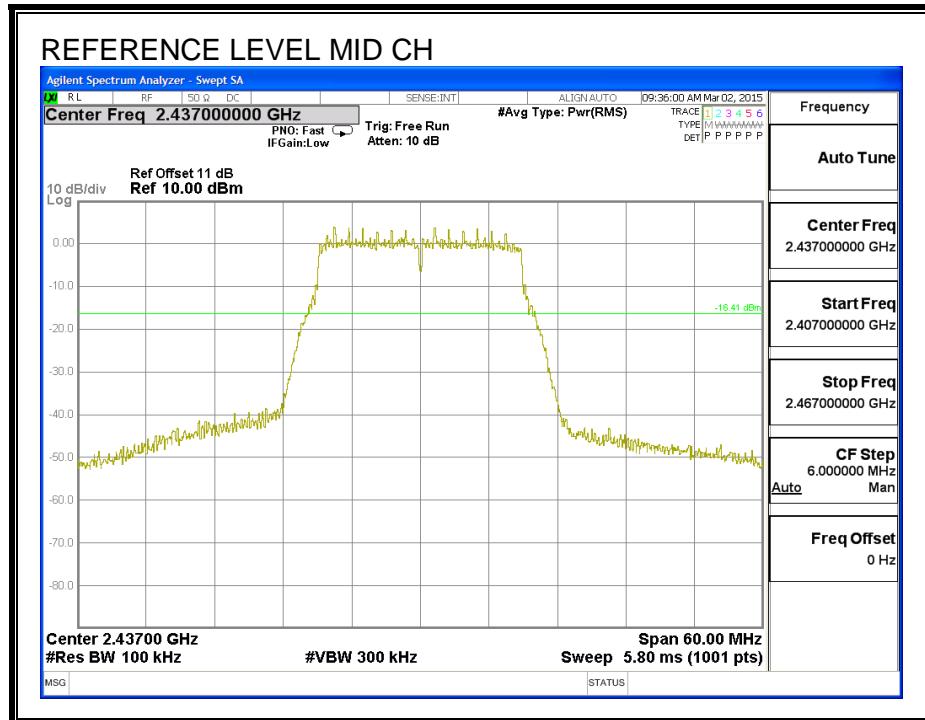


LOW CHANNEL BANDEDGE, ANTENNA A


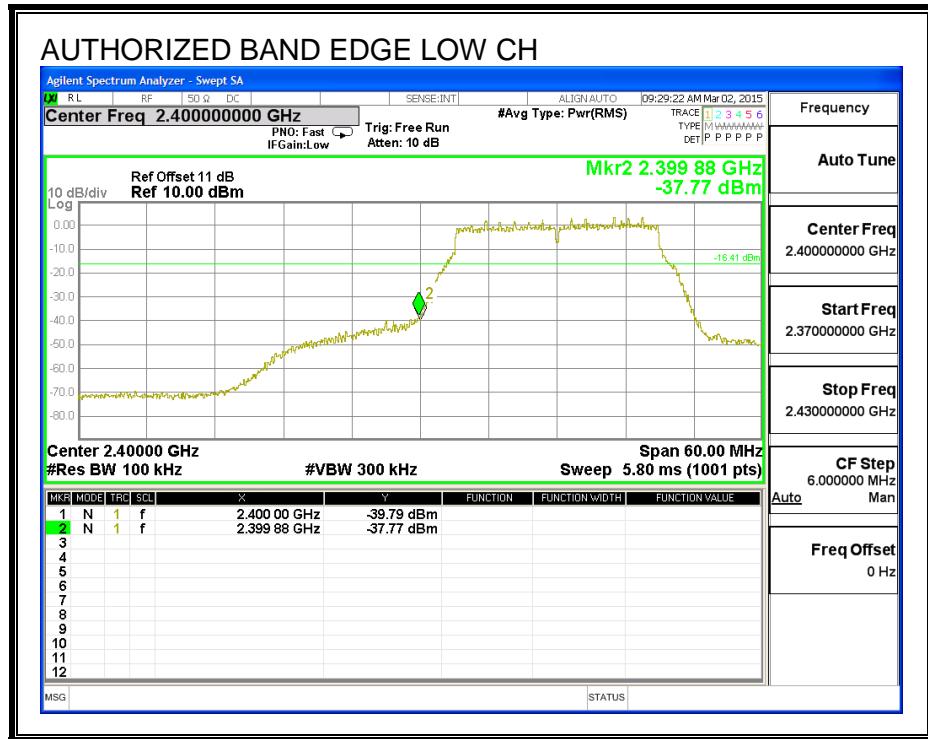




HIGH CHANNEL BANDEDGE, ANTENNA A

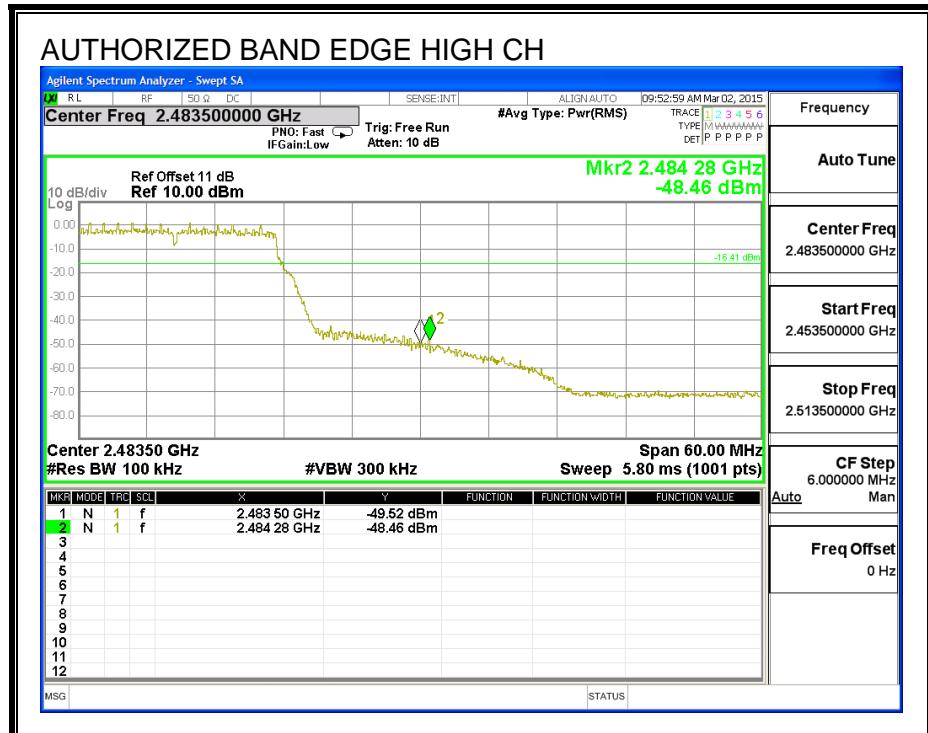


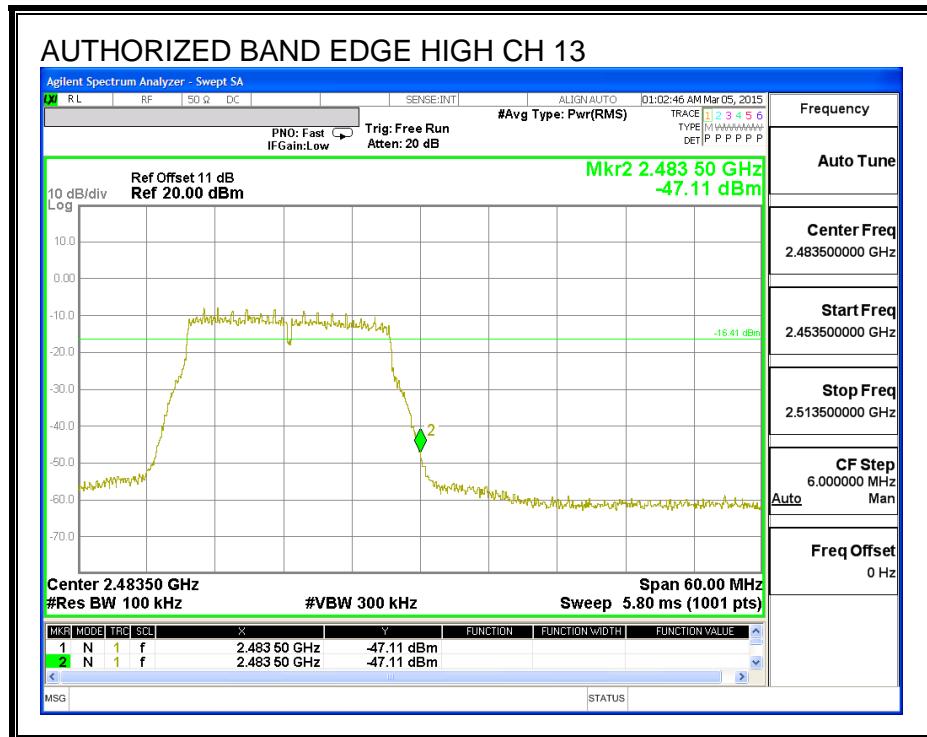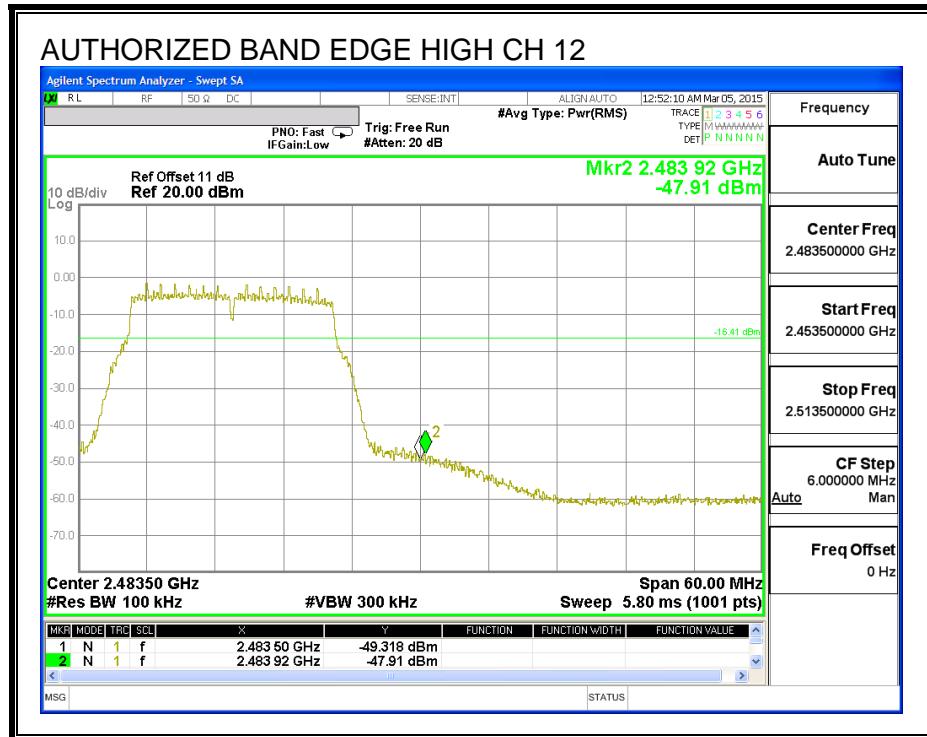

OUT-OF-BAND EMISSIONS, ANTENNA A

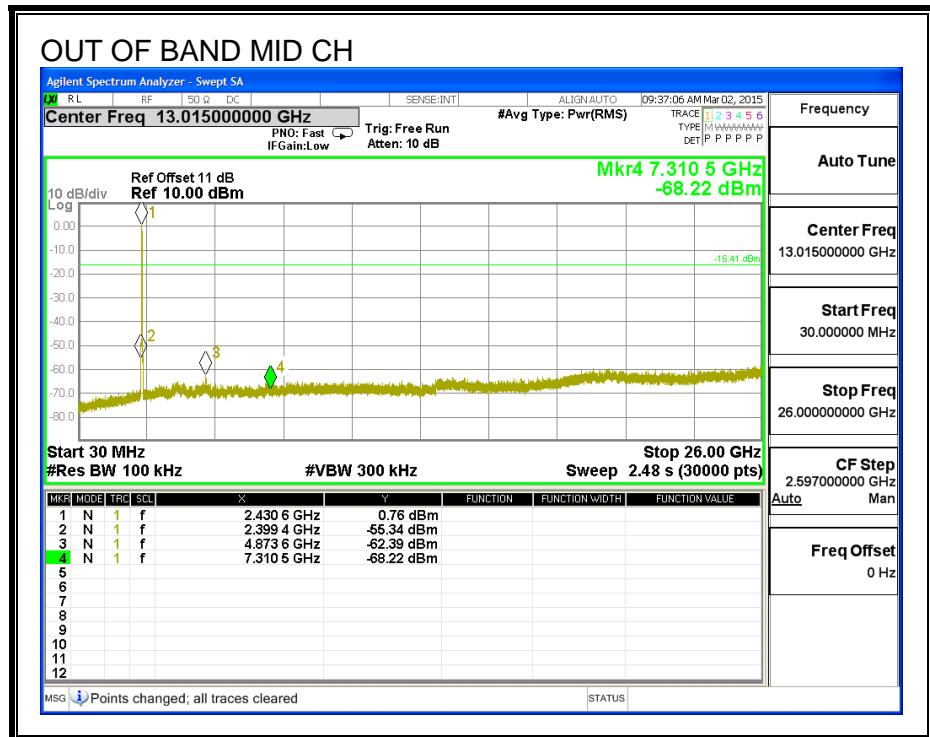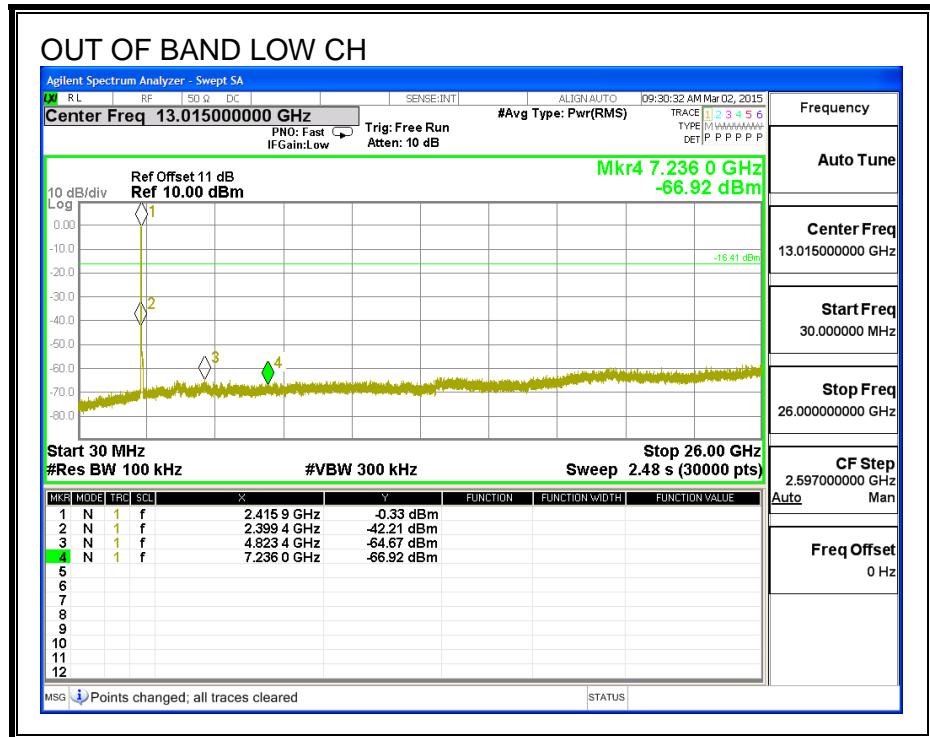

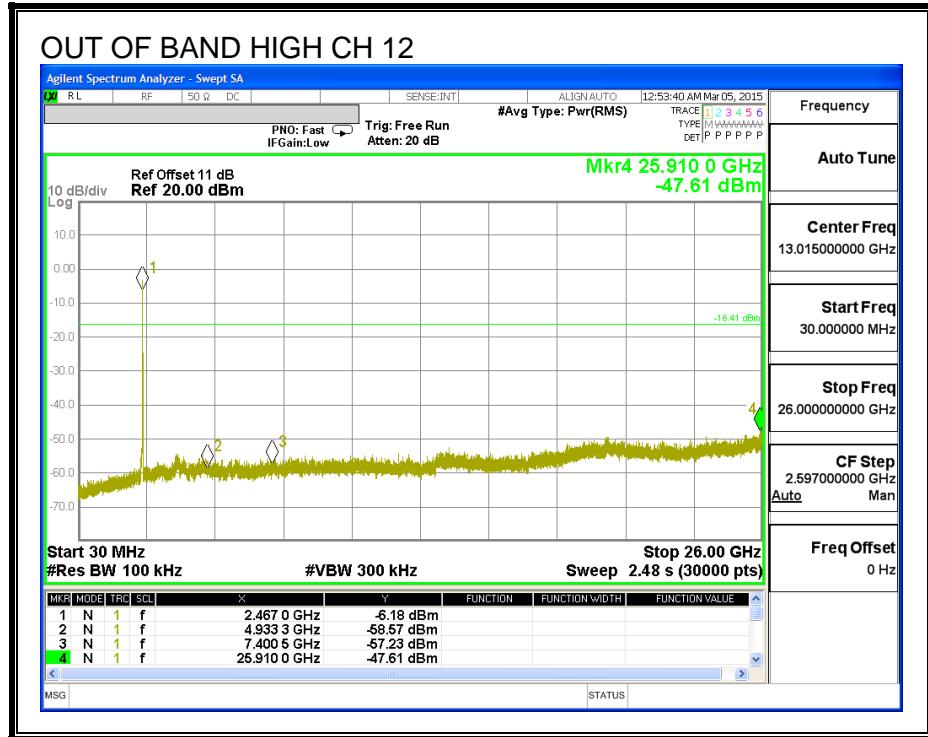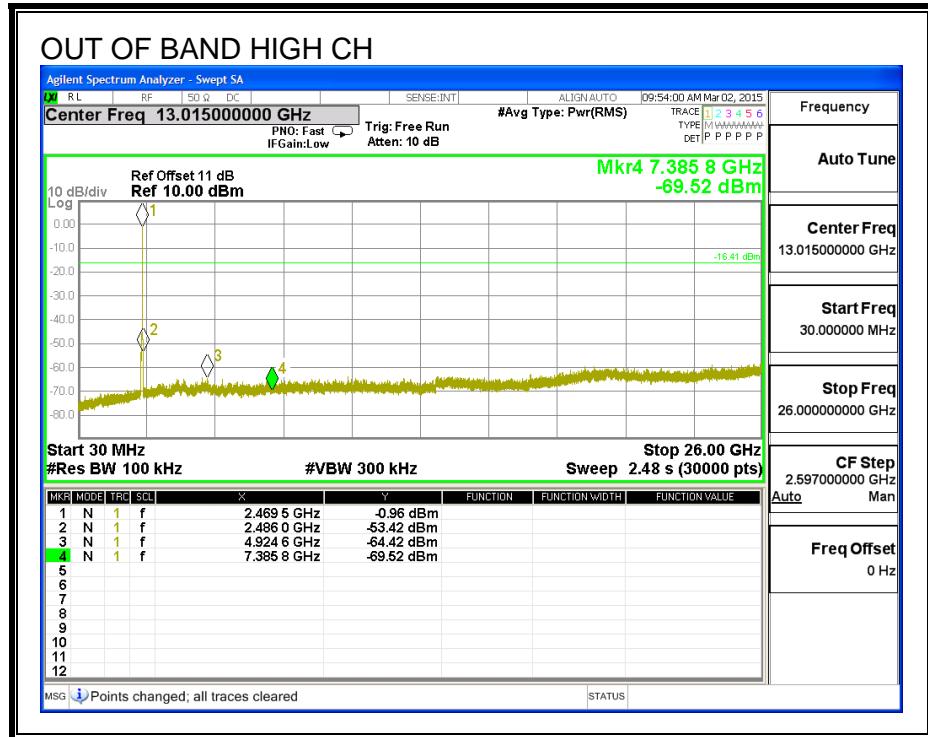

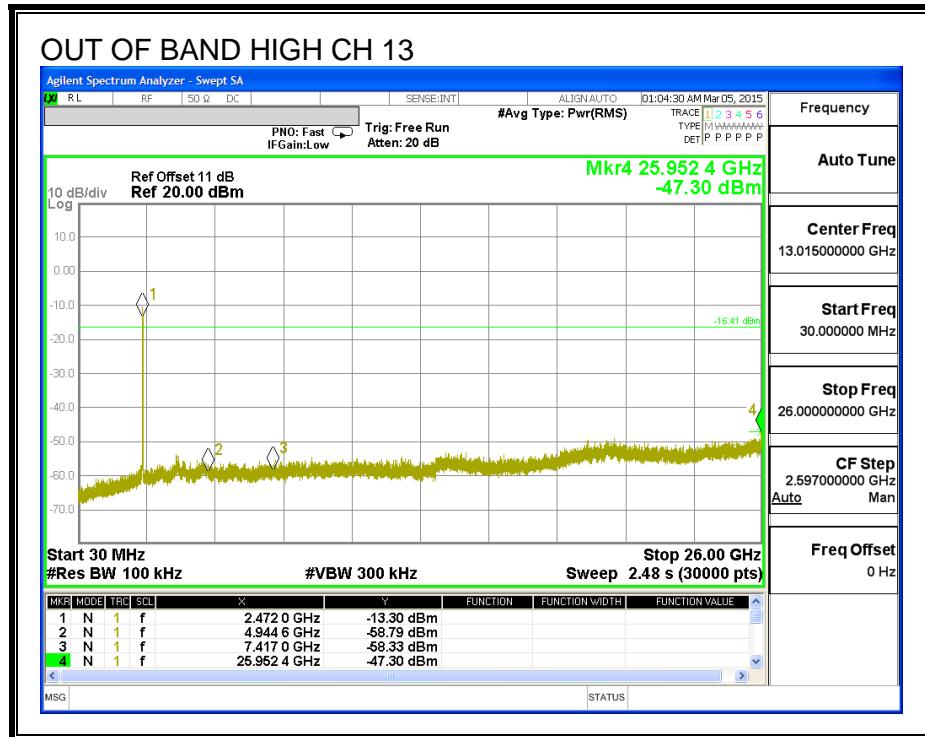

8.8. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA D & A)

8.8.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna D (MHz)	6 dB BW Antenna A (MHz)	Minimum Limit (MHz)
Low	2412	17.610	17.640	0.5
Mid	2437	17.659	17.670	0.5
High	2462	17.640	17.670	0.5
High	2467	17.640	17.670	0.5
High	2472	17.400	17.700	0.5


6 dB BANDWIDTH, ANTENNA D

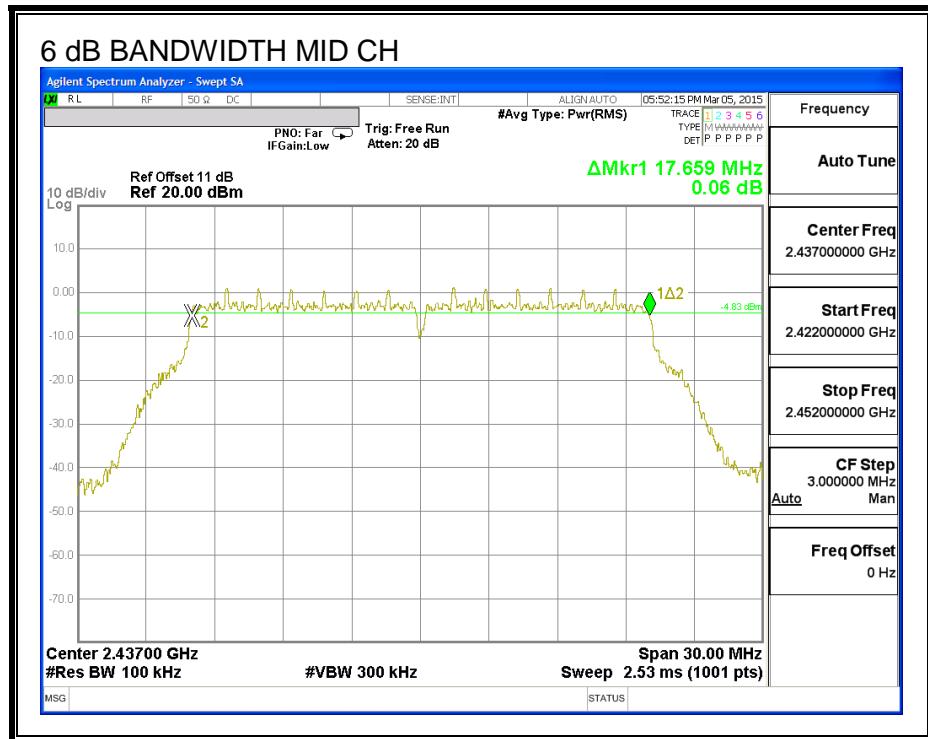
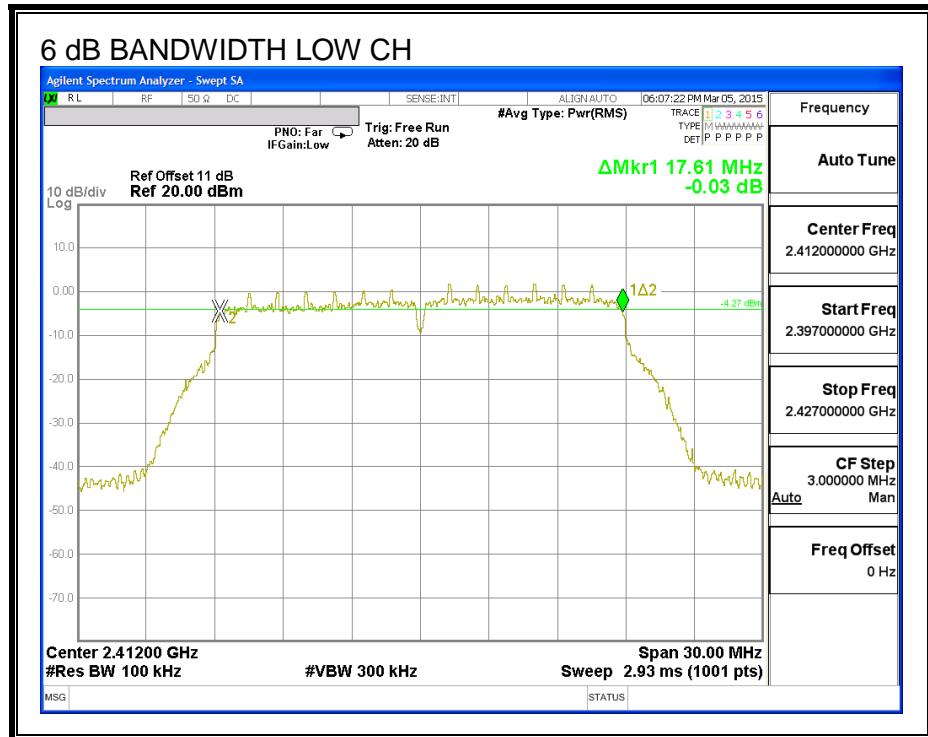


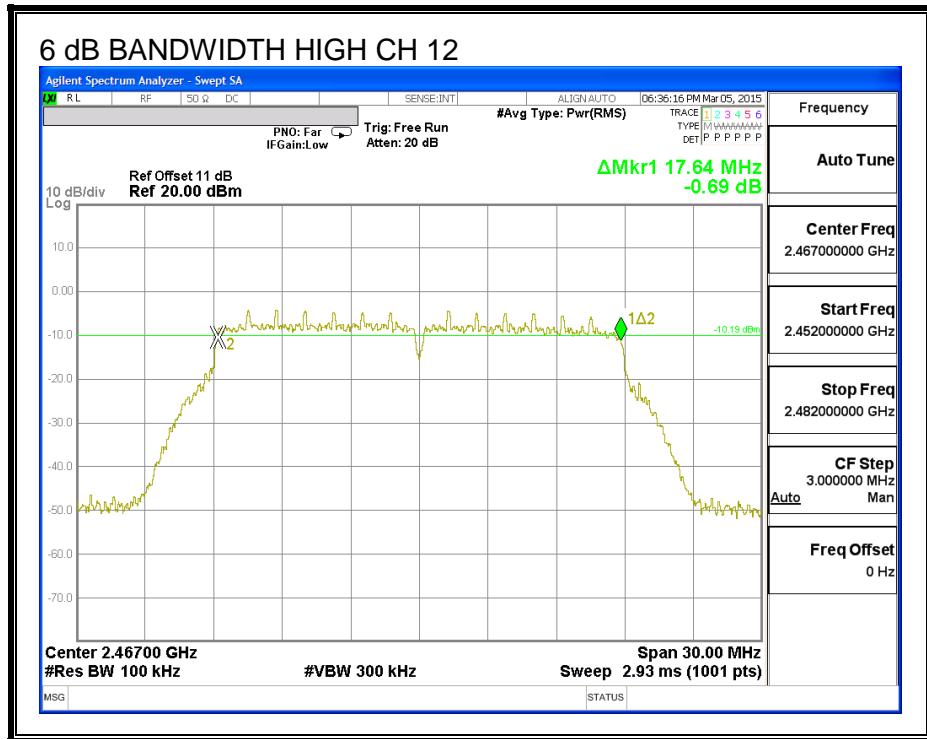
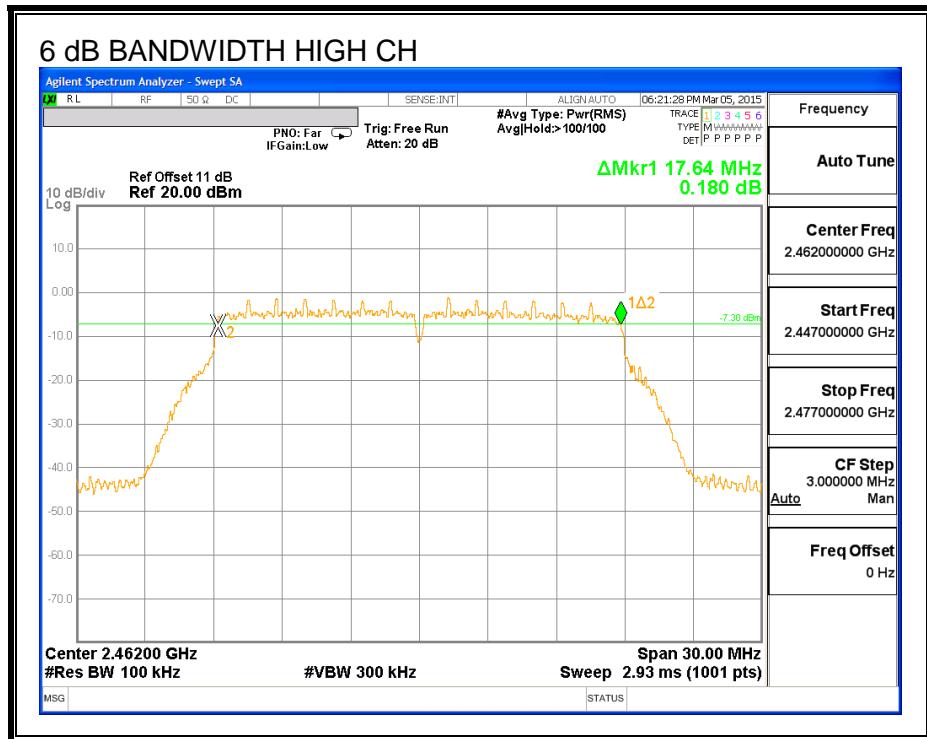


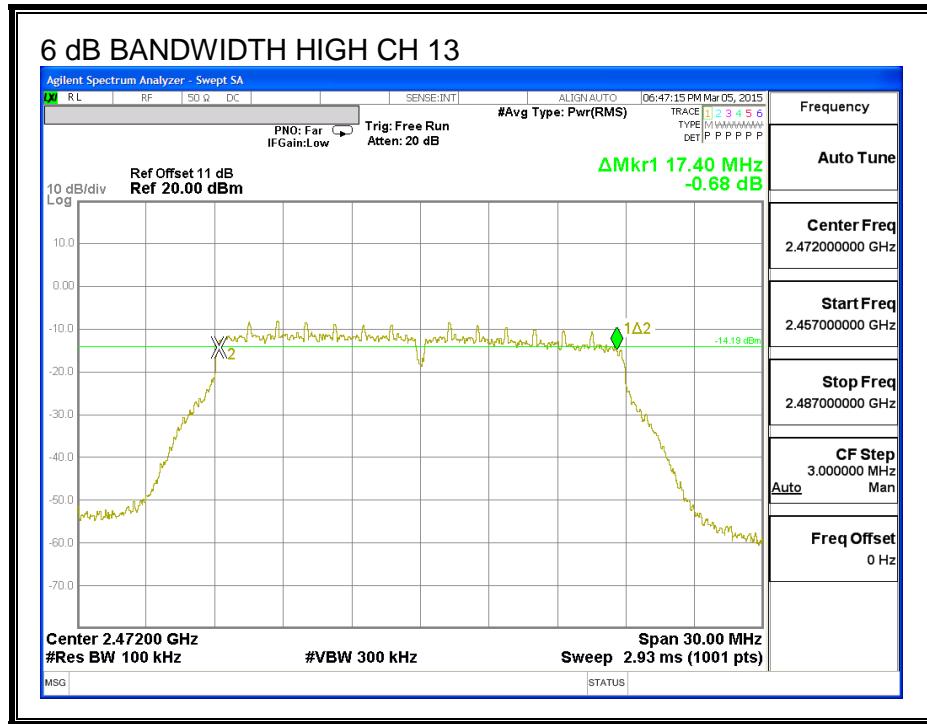

6 dB BANDWIDTH, ANTENNA A

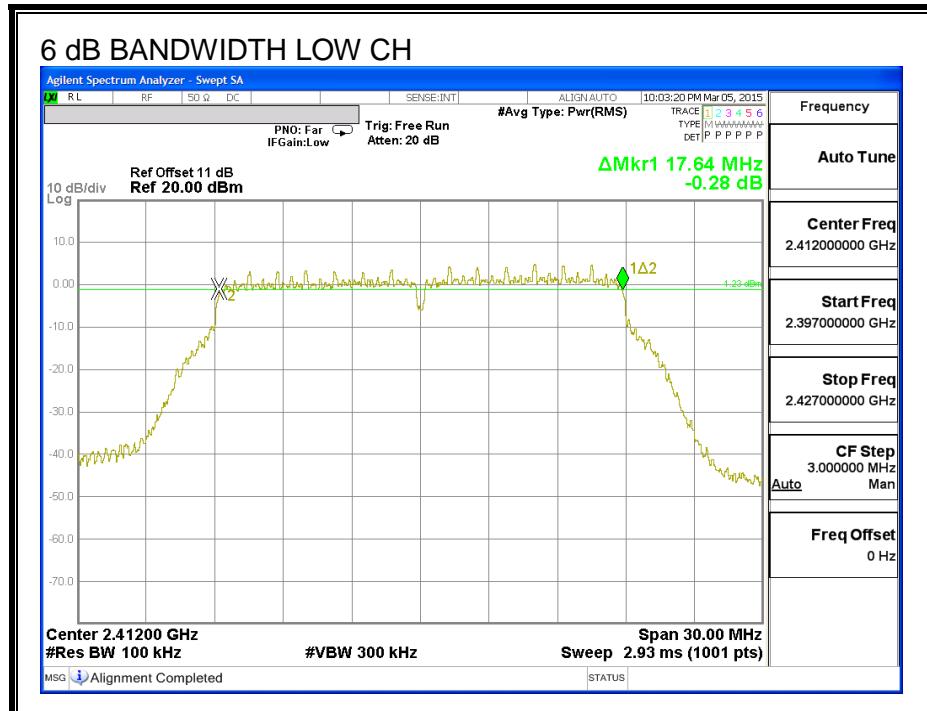

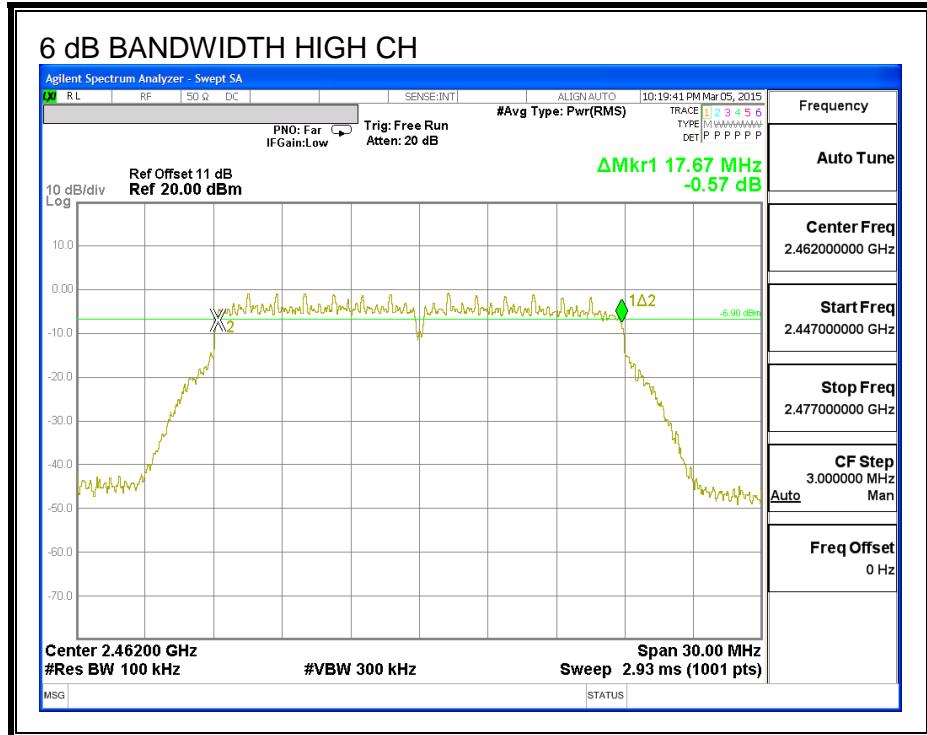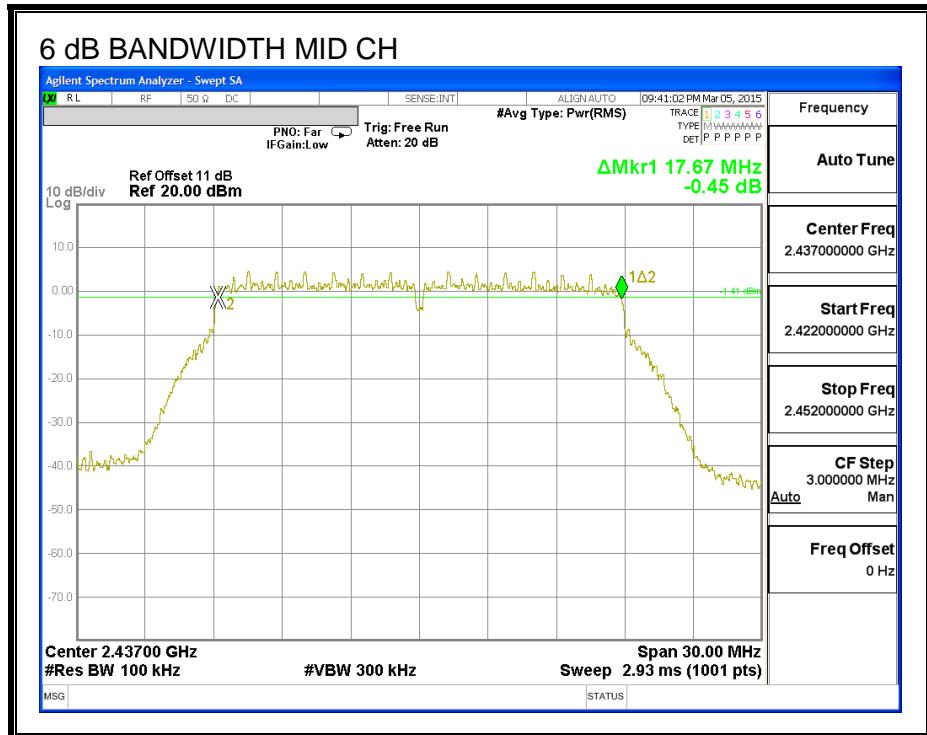

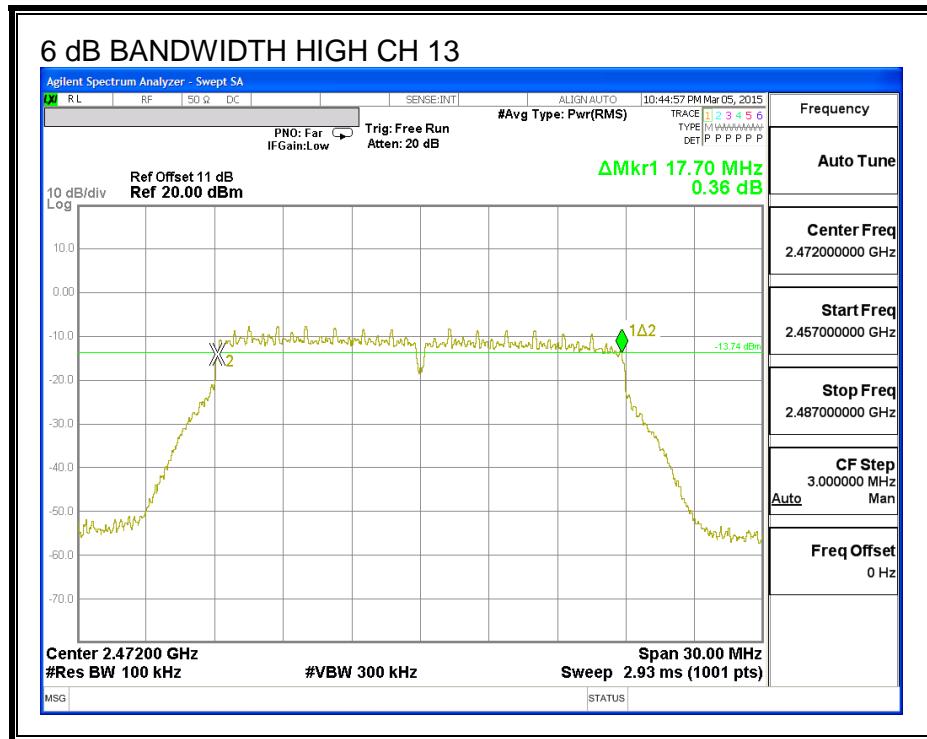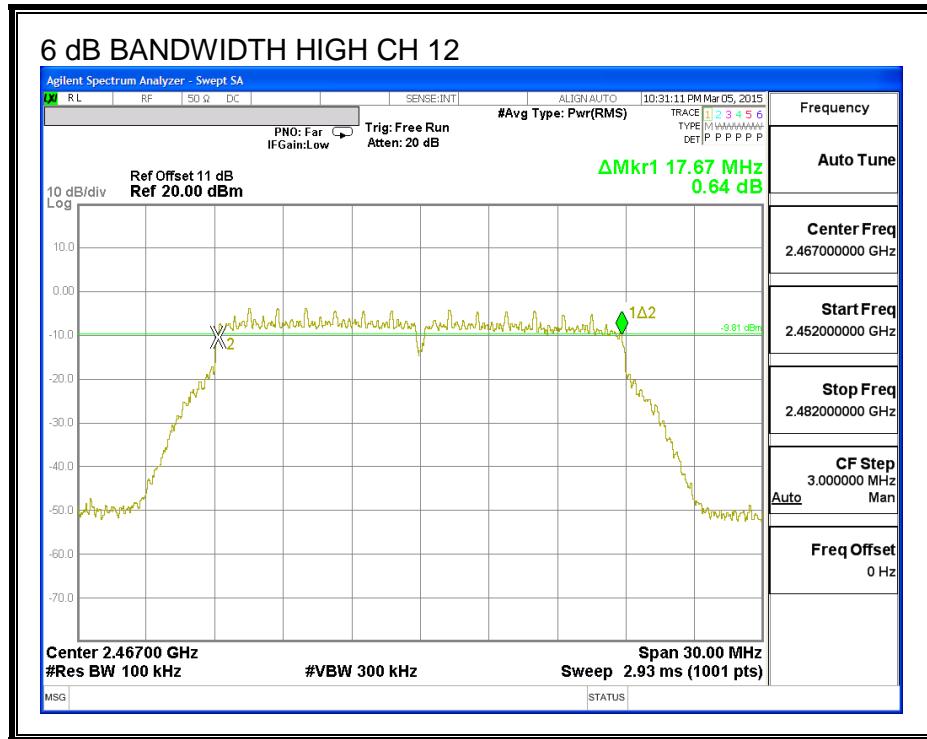

8.8.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz) Antenna D	99% Bandwidth (MHz) Antenna A
Low	2412	17.705	17.717
Mid	2437	17.673	17.819
High	2462	17.745	17.658
High	2467	17.642	17.721
High	2472	17.619	17.785



99% BANDWIDTH ANTENNA D

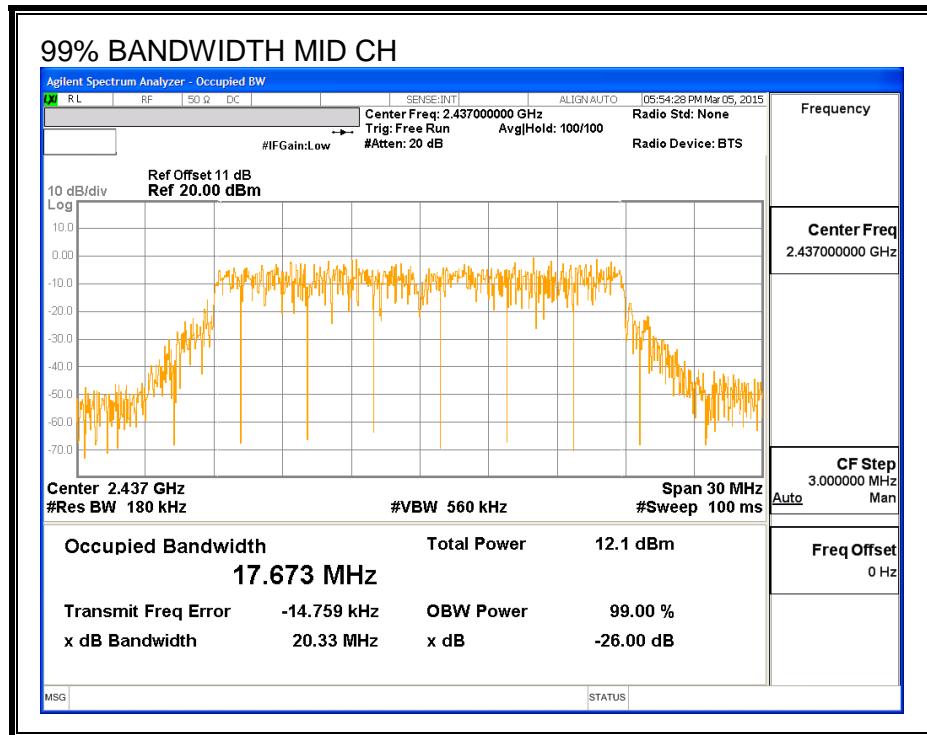
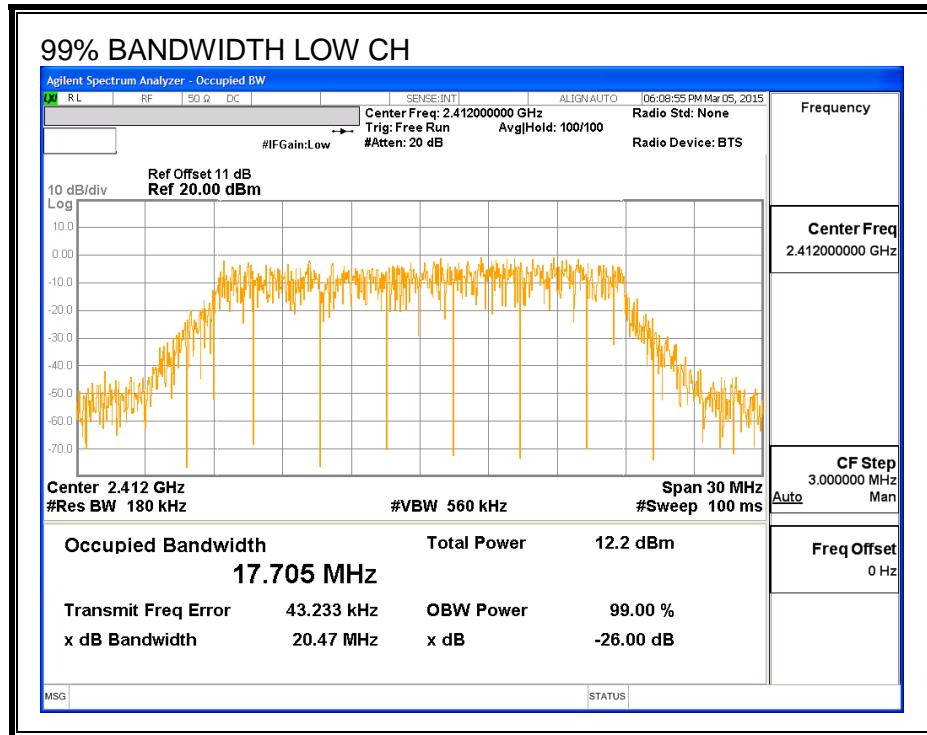


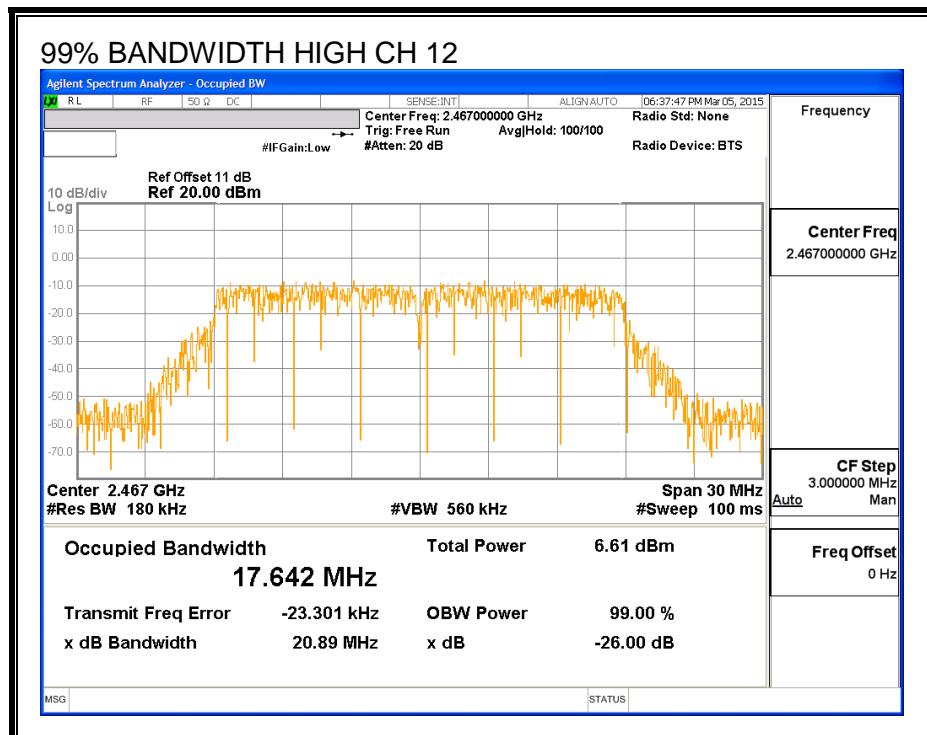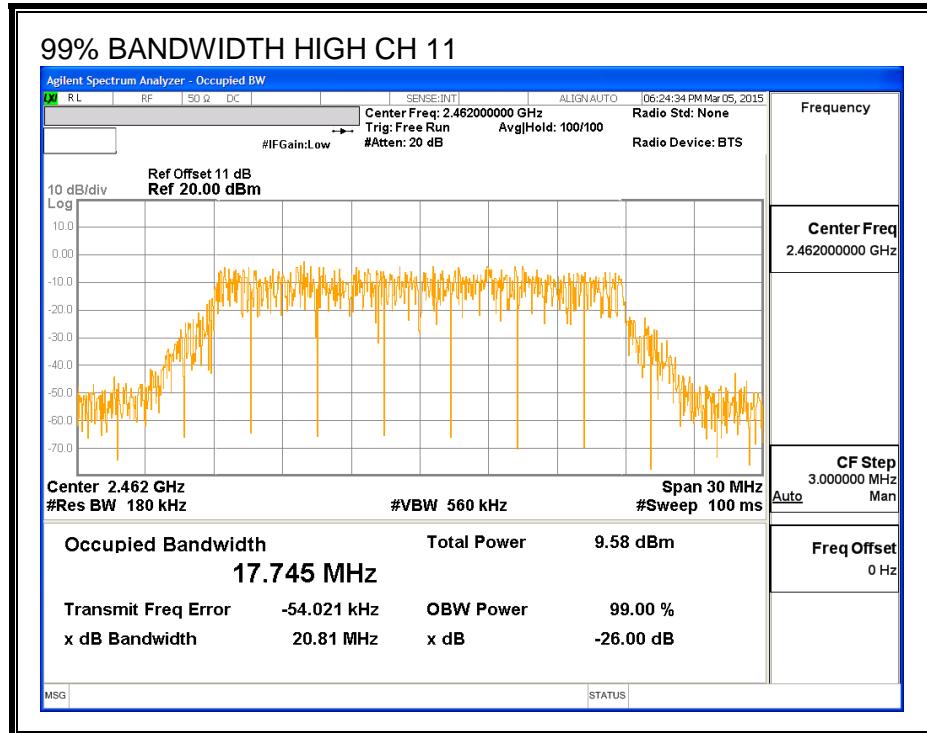


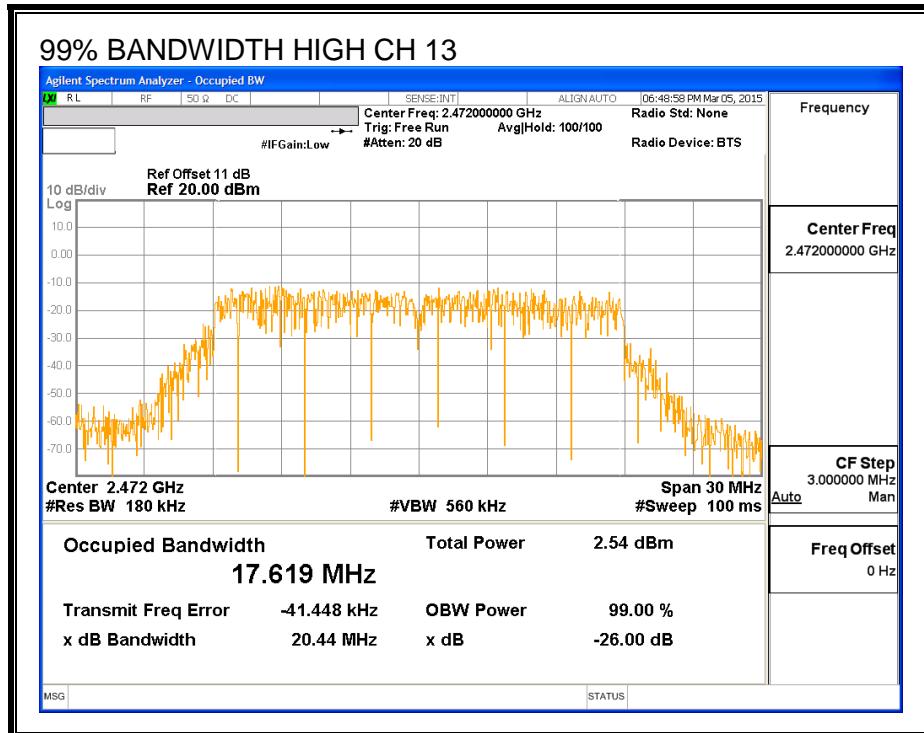

99% BANDWIDTH ANTENNA A

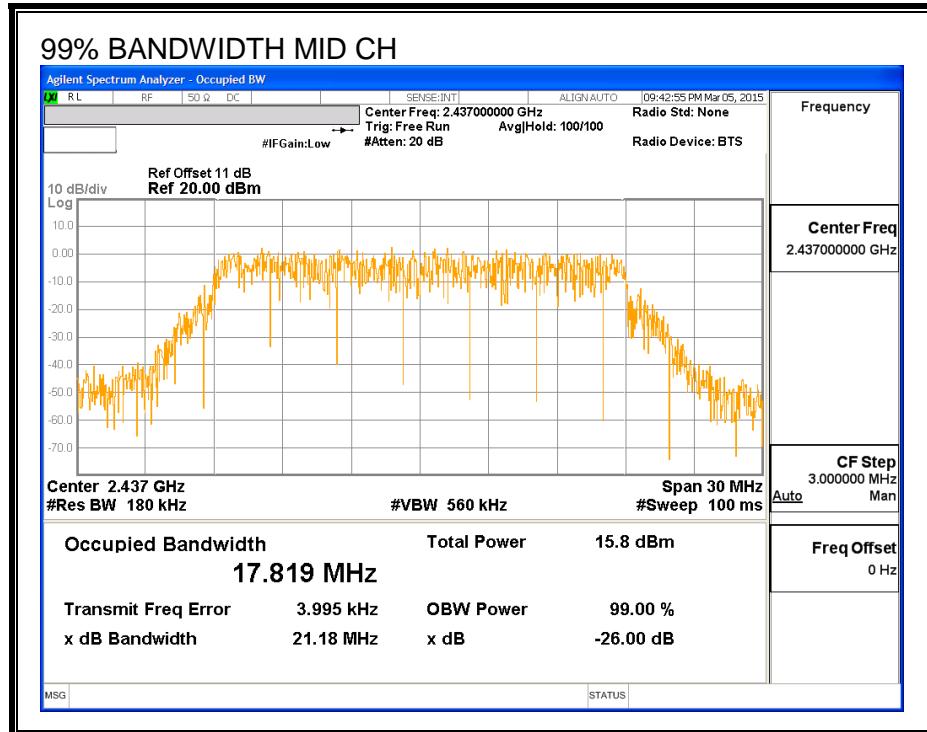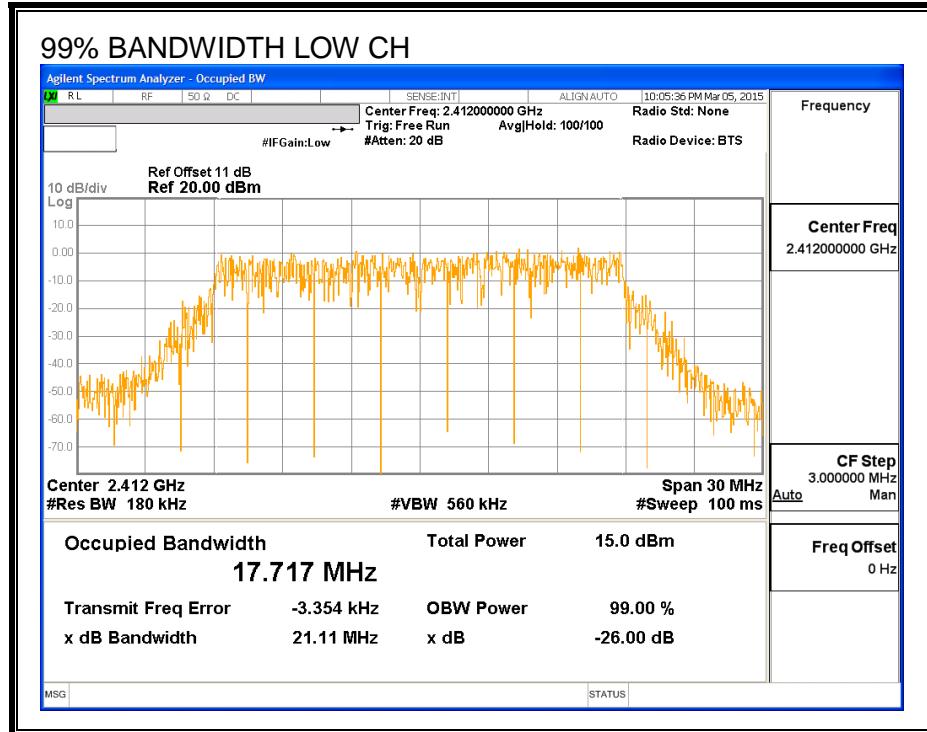

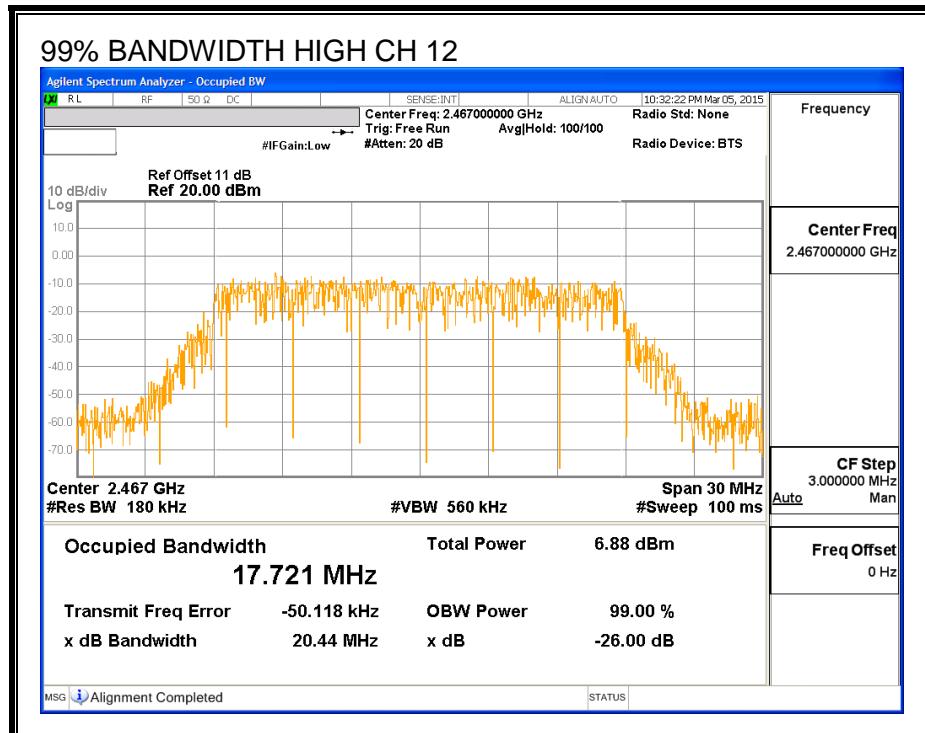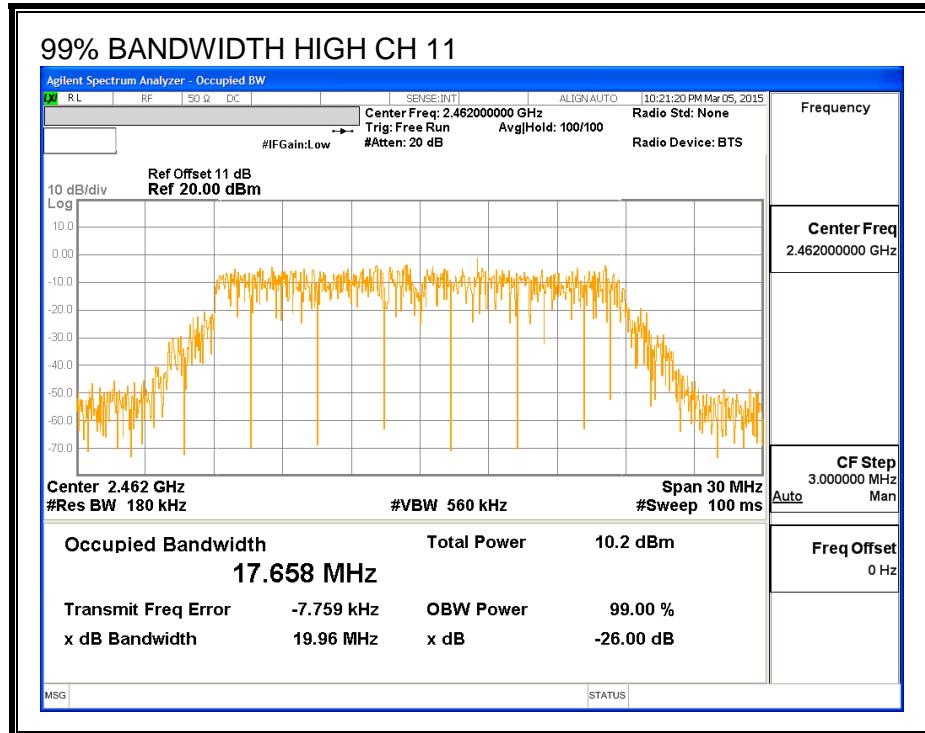

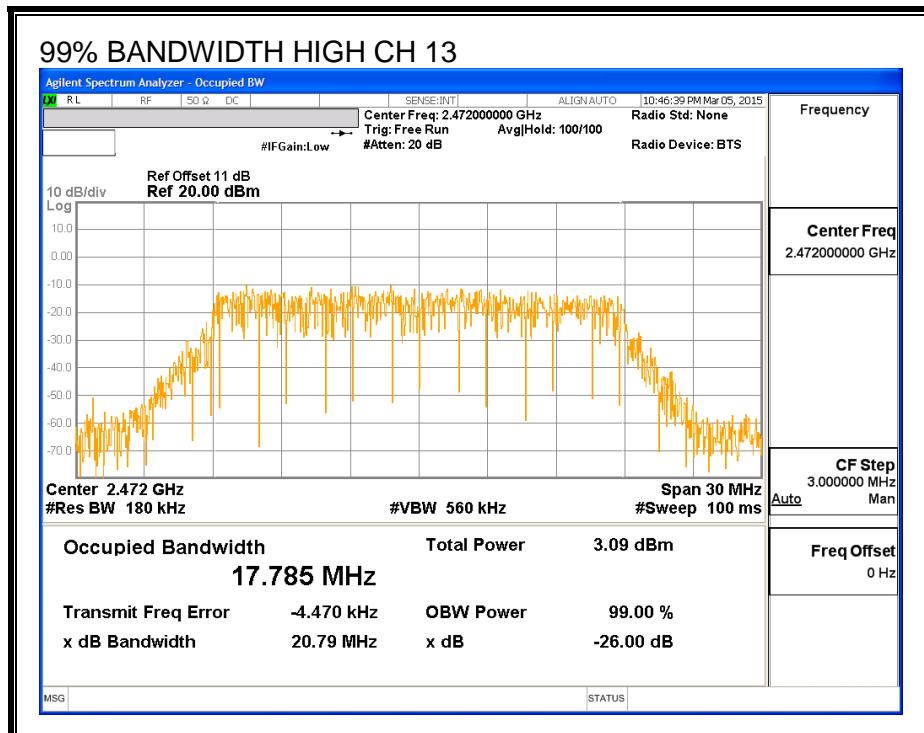

8.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Antenna D Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	2412	12.49	14.80	16.81
Mid	2437	12.50	14.84	16.84
High	2462	9.82	11.88	13.98
High	2467	6.92	8.95	11.06
High	2472	0.96	2.99	5.10

8.8.4. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna D	Antenna A	Uncorrelated Chains
Antenna Gain (dBi)	Antenna Gain (dBi)	Directional Gain (dBi)
2.50	0.20	1.50

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	1.50	30.00	30	36	30.00
Mid	2437	1.50	30.00	30	36	30.00
High	2462	1.50	30.00	30	36	30.00
High	2467	1.50	30.00	30	36	30.00
High	2472	1.50	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Antenna D Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	20.49	24.40	25.88	30.00	-4.12
Mid	2437	20.52	24.74	26.13	30.00	-3.87
High	2462	17.82	21.16	22.81	30.00	-7.19
High	2467	14.92	18.17	19.85	30.00	-10.15
High	2472	8.56	12.57	14.02	30.00	-15.98

8.8.5. PSD

LIMITS



FCC §15.247



RESULTS


PSD Results

Channel	Frequency (MHz)	Antenna D Meas (dBm)	Antenna A Meas (dBm)	Total PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.66	-9.91	-8.06	8.0	-16.1
Mid	2437	-12.64	-9.68	-7.90	8.0	-15.9
High	2462	-16.22	-13.44	-11.60	8.0	-19.6
High	2467	-18.58	-16.72	-14.54	8.0	-22.5
High	2472	-22.30	-21.49	-18.87	8.0	-26.9


PSD, ANTENNA D

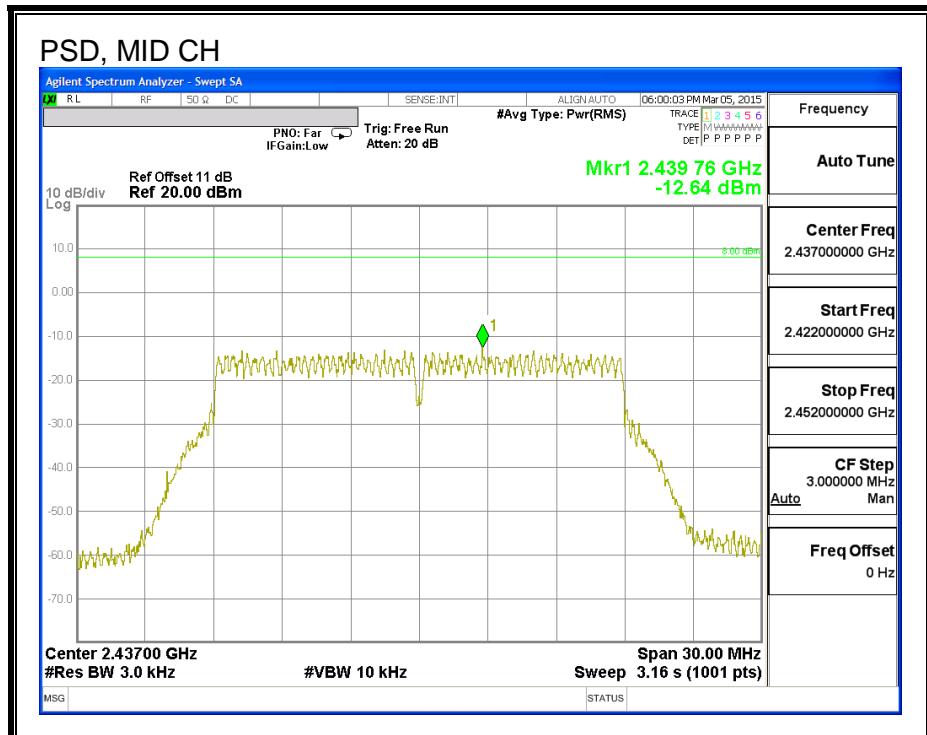
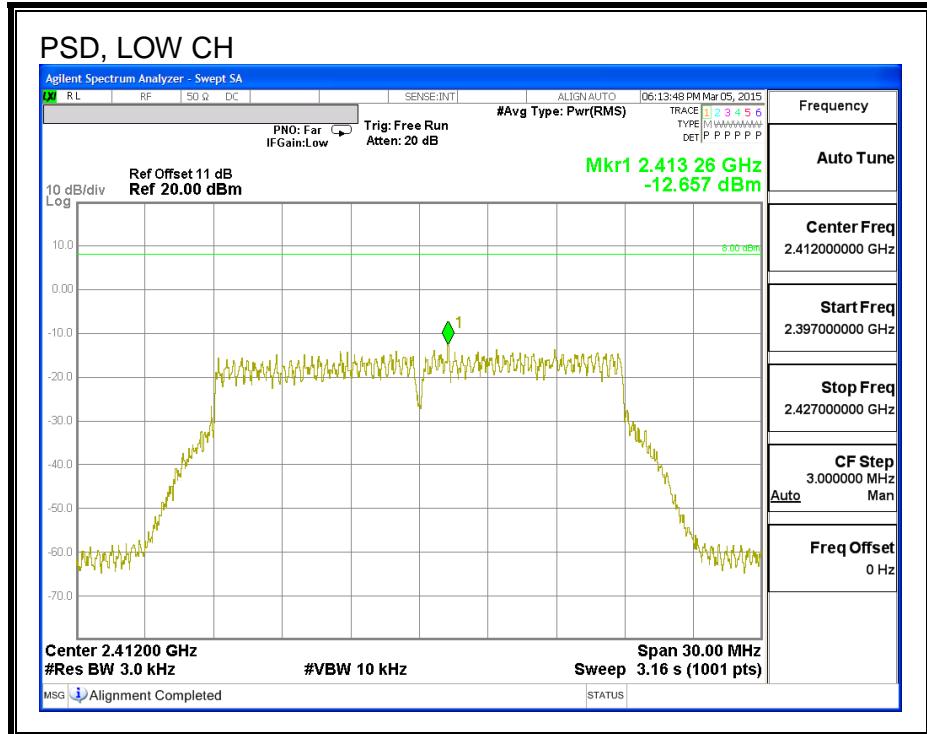


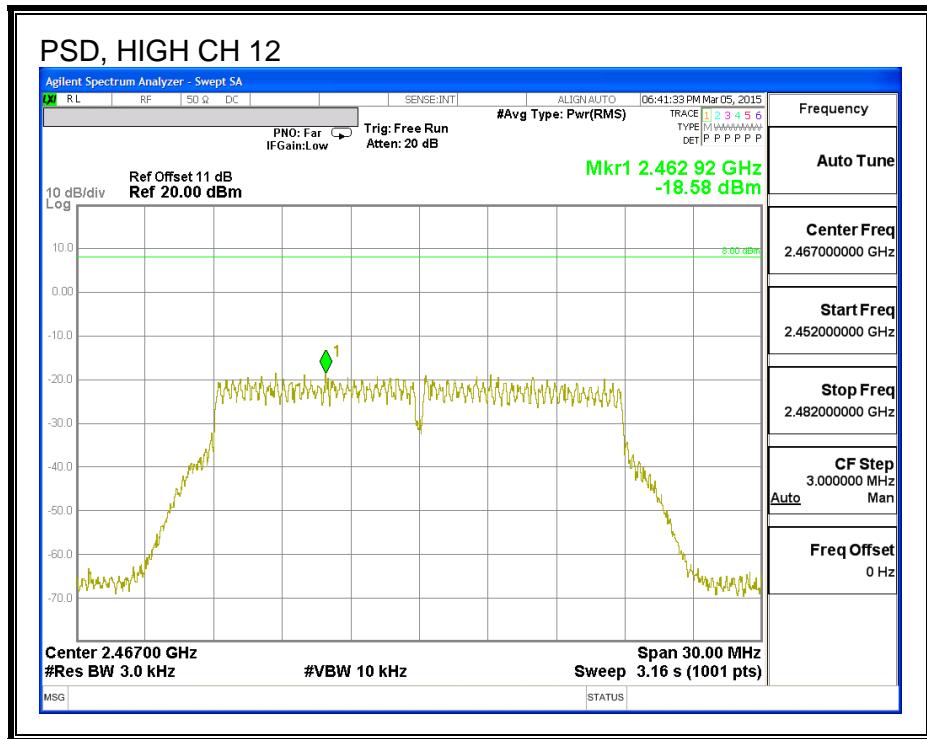
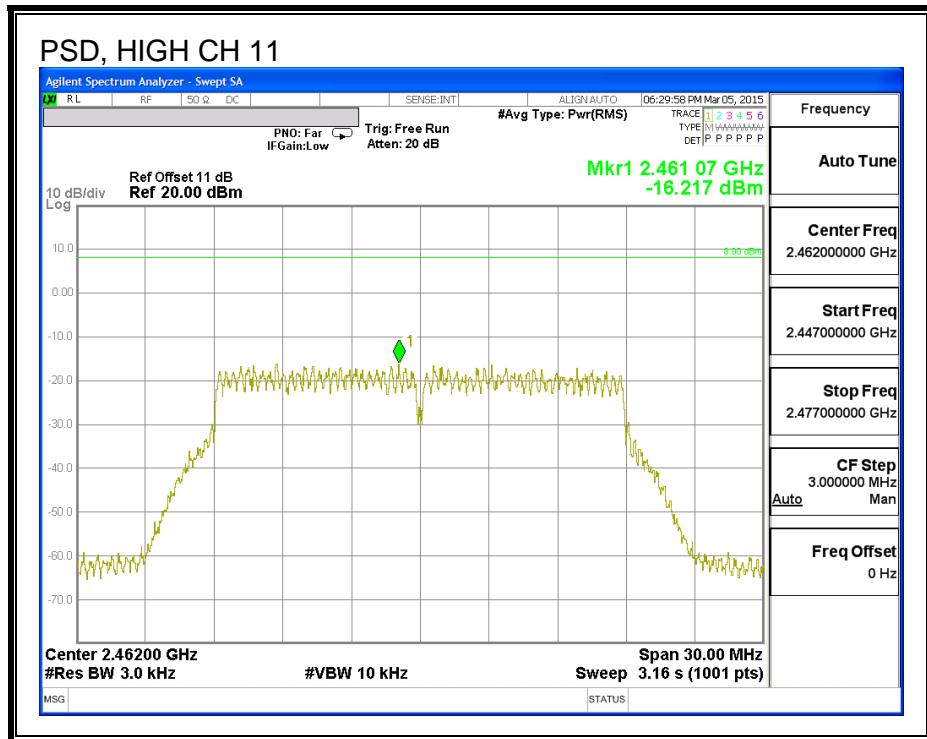


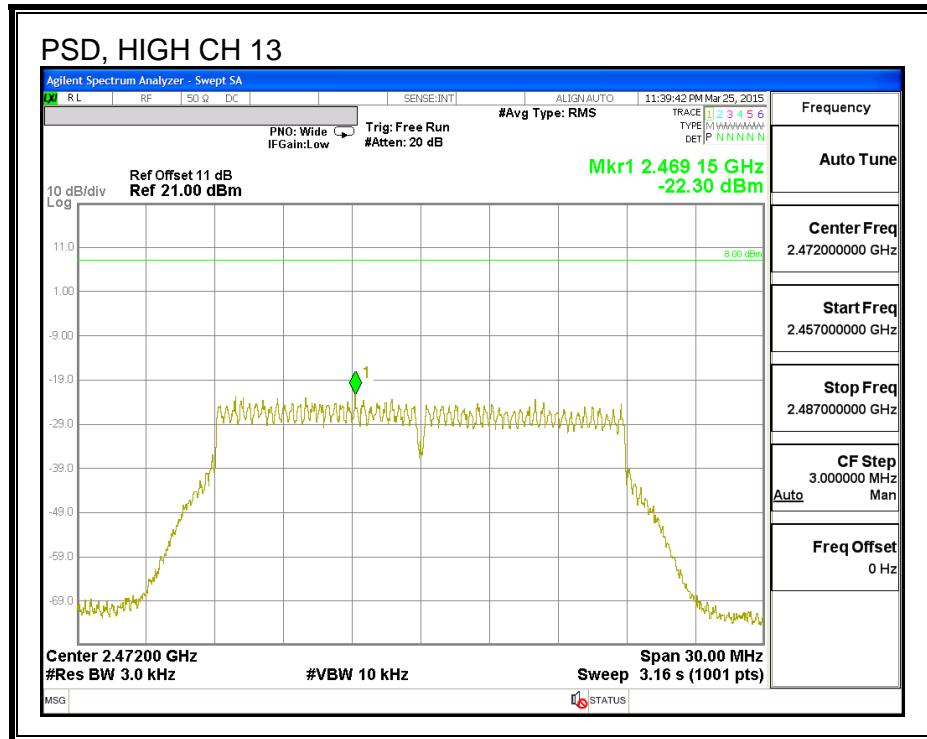

PSD, ANTENNA A

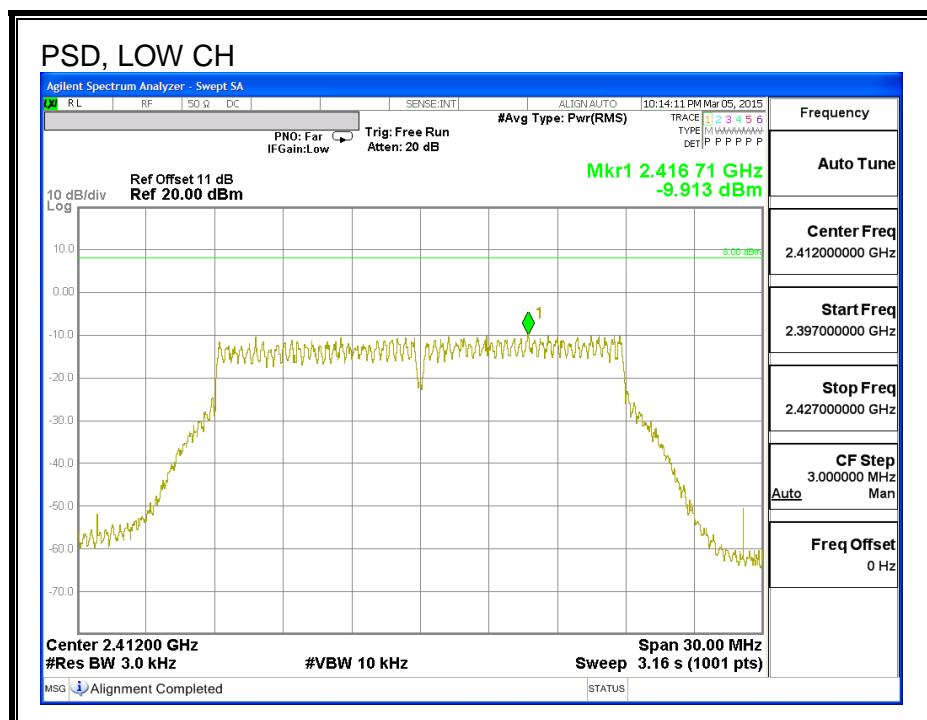

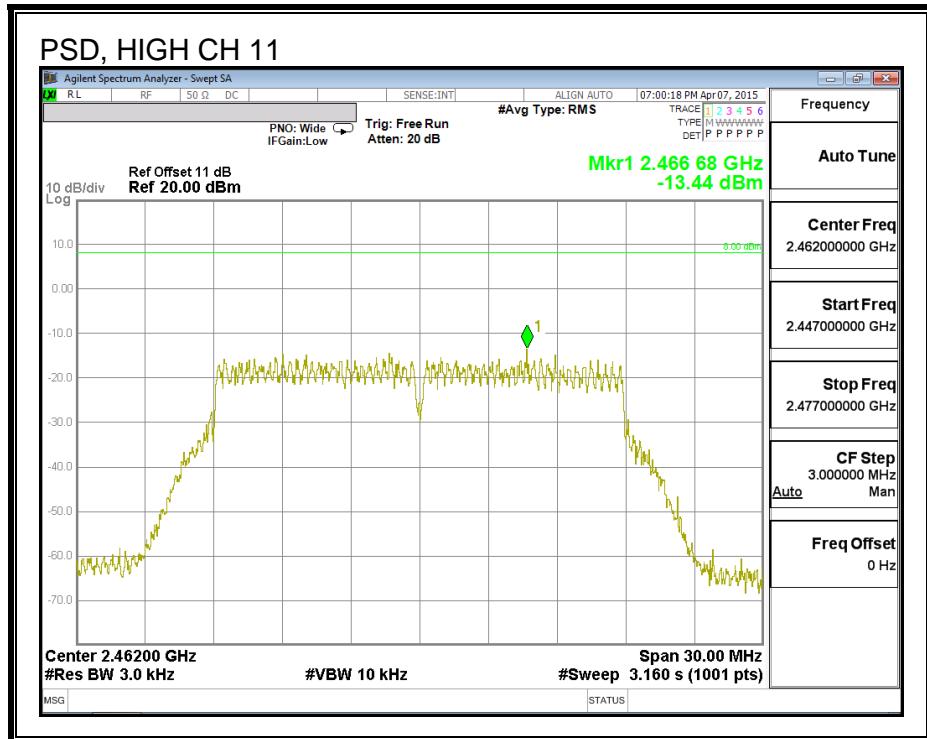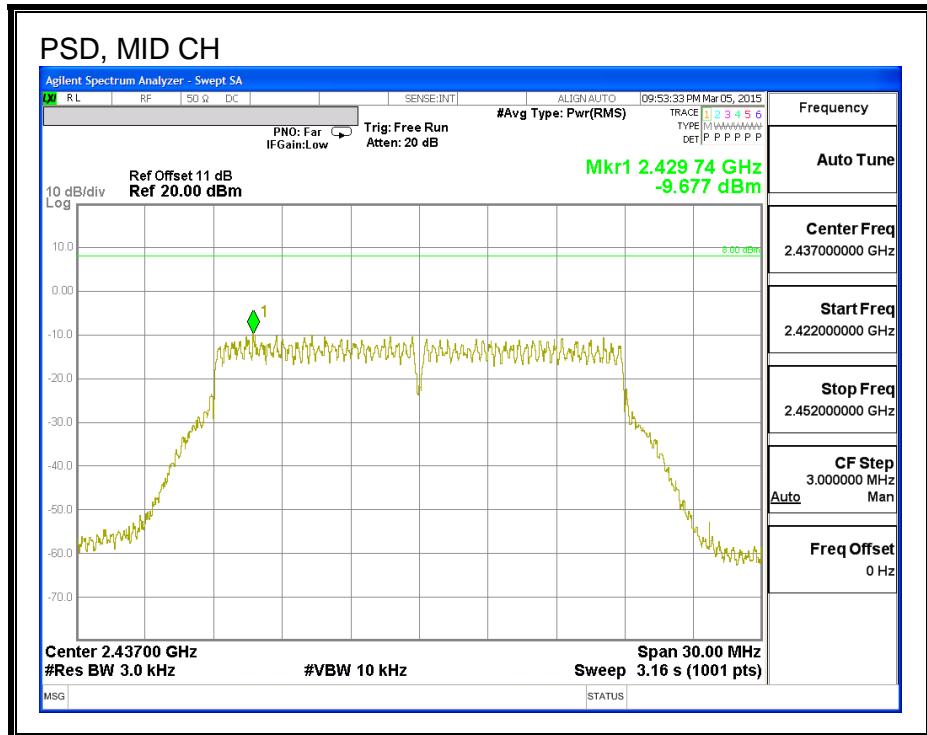

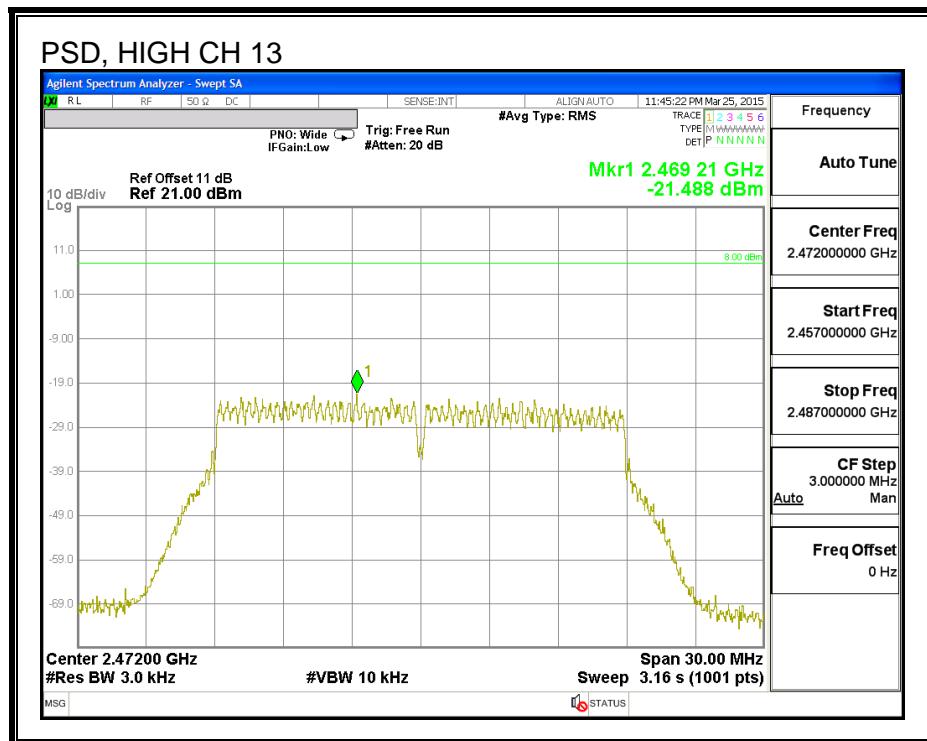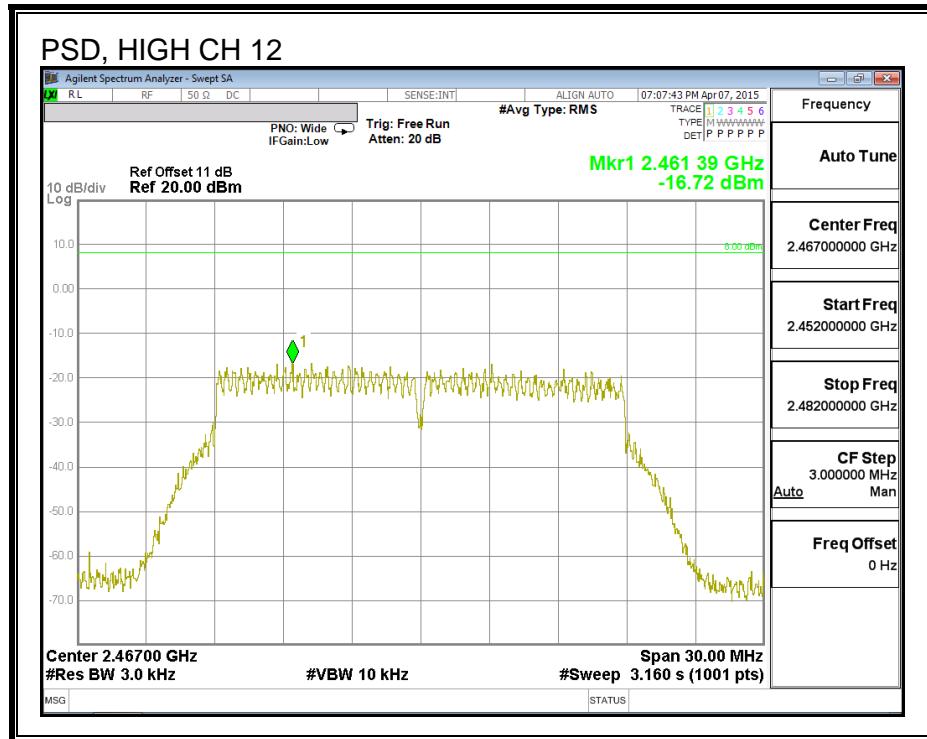

8.8.6. OUT-OF-BAND EMISSIONS


LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, ANTENNA D


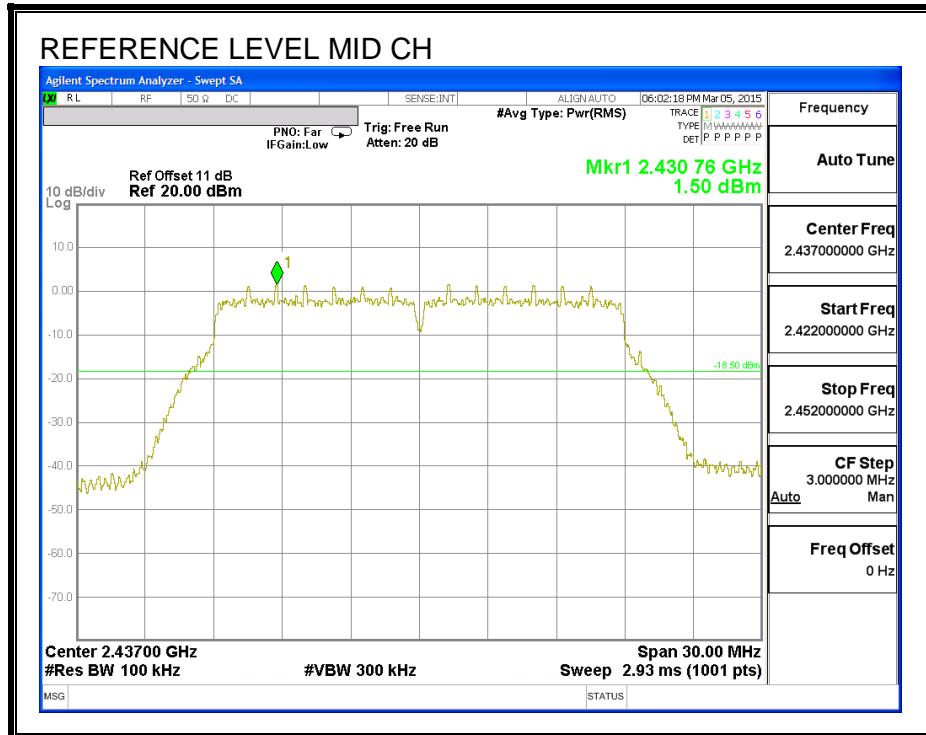


LOW CHANNEL BANDEDGE, ANTENNA D


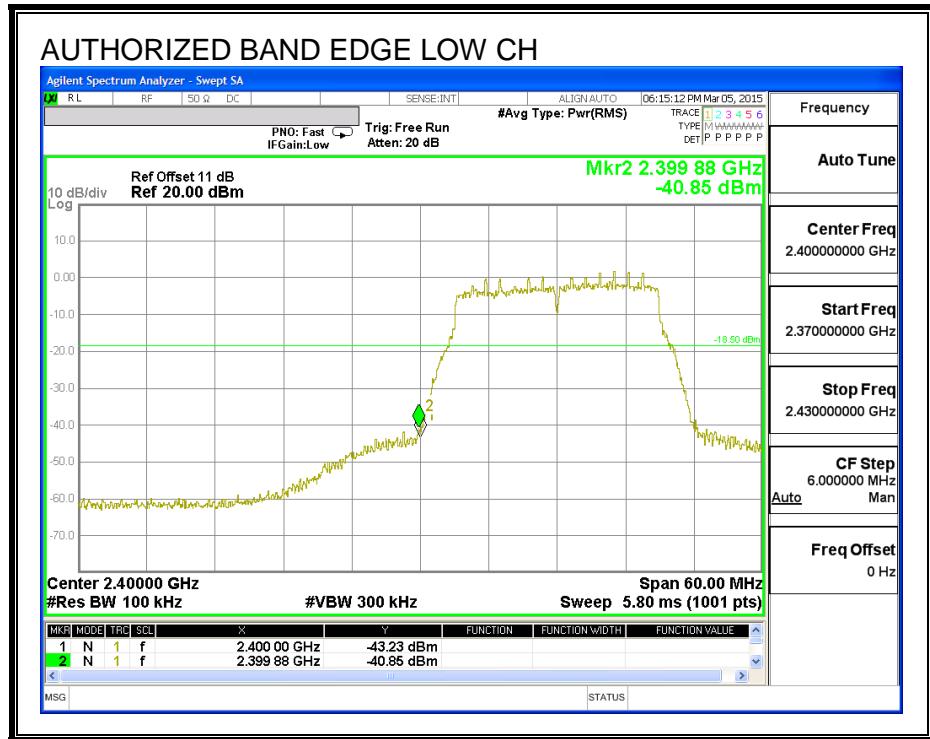




HIGH CHANNEL BANDEDGE, ANTENNA D

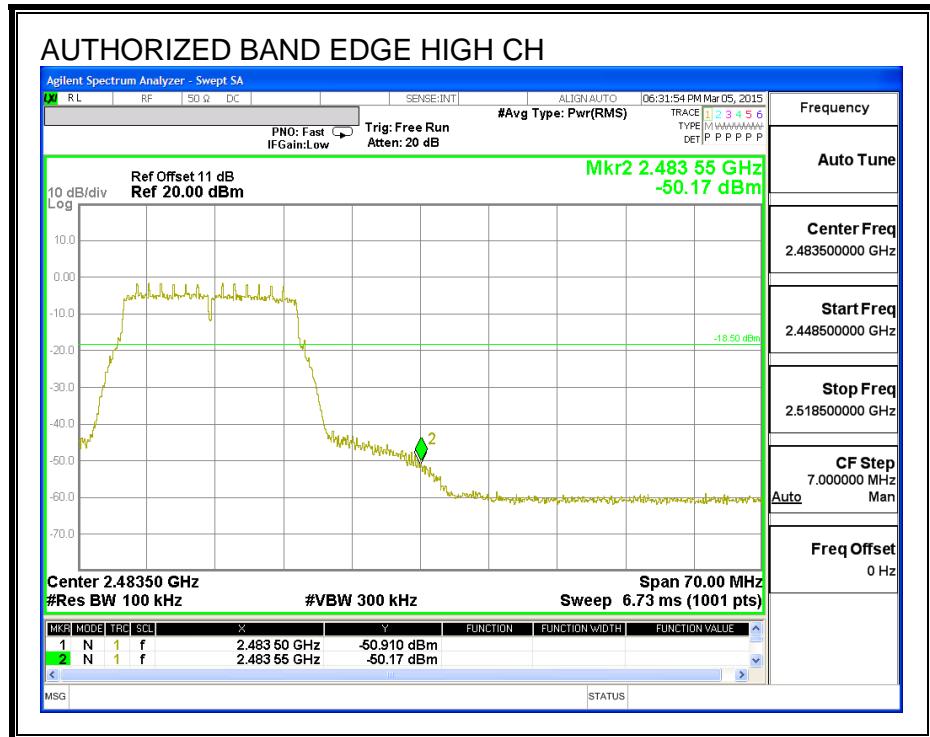


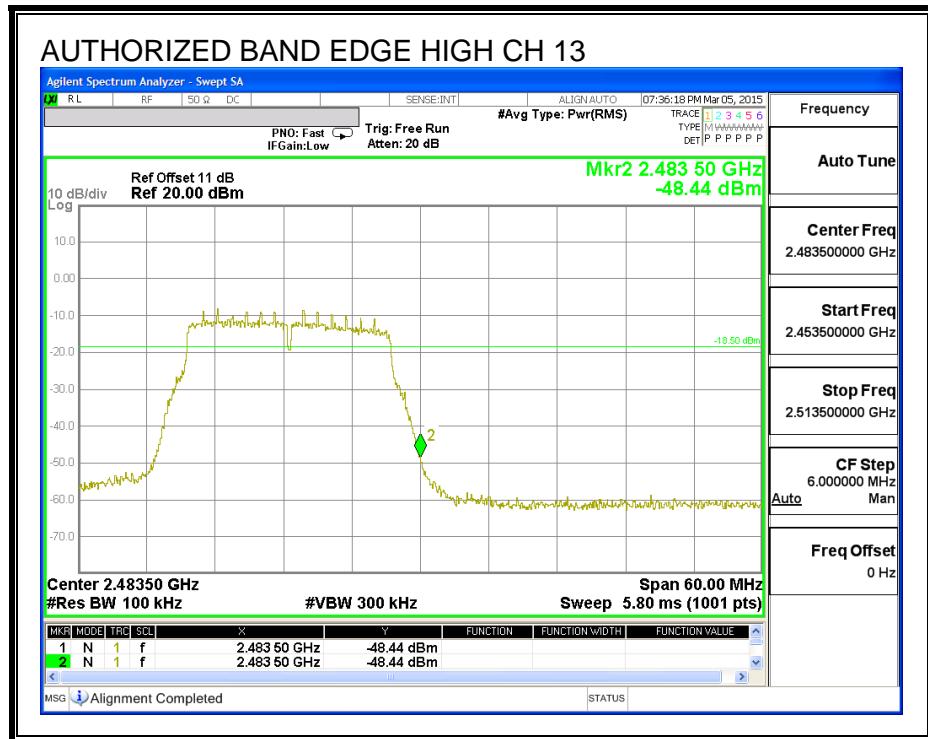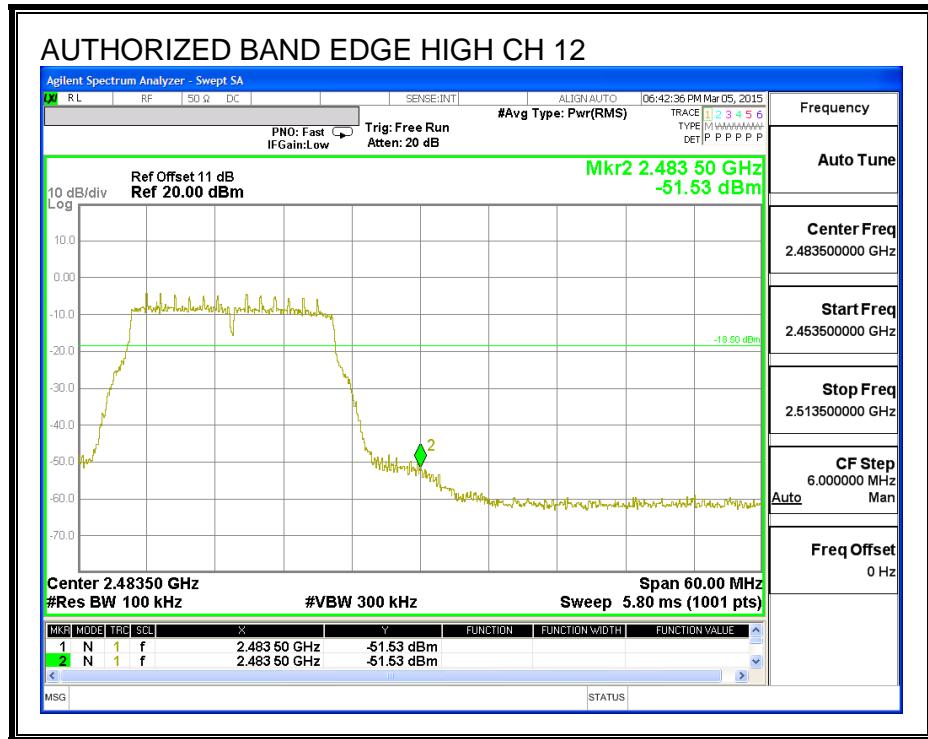


OUT-OF-BAND EMISSIONS, ANTENNA D

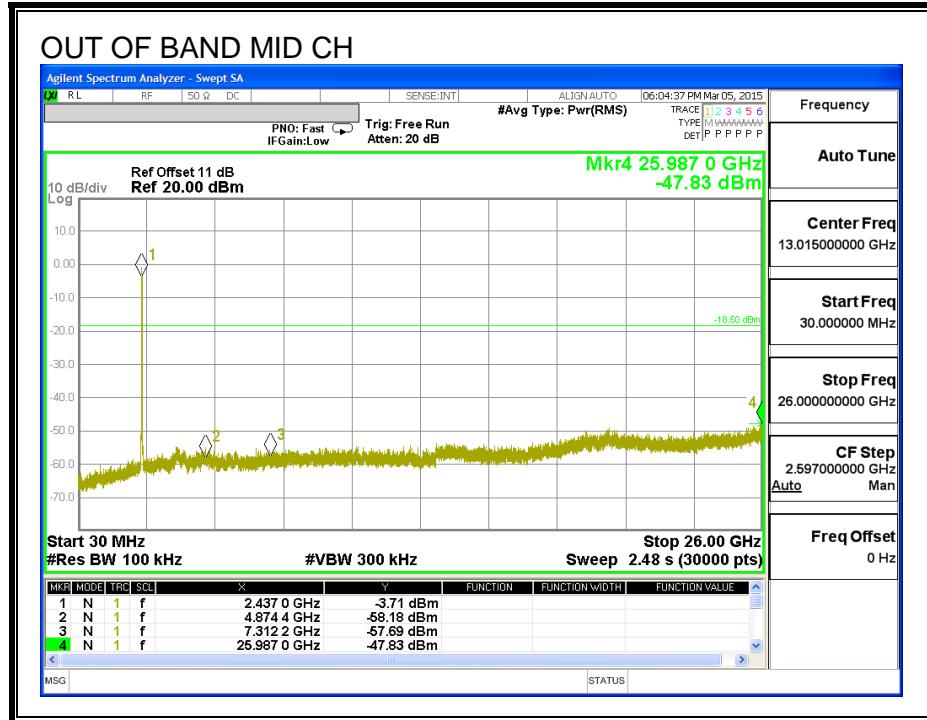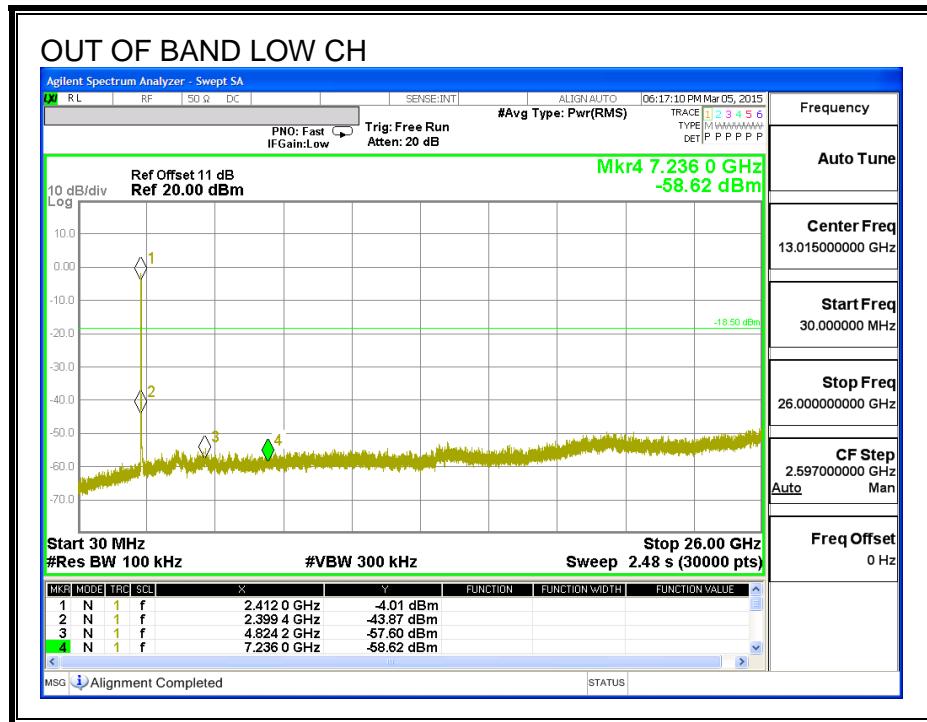

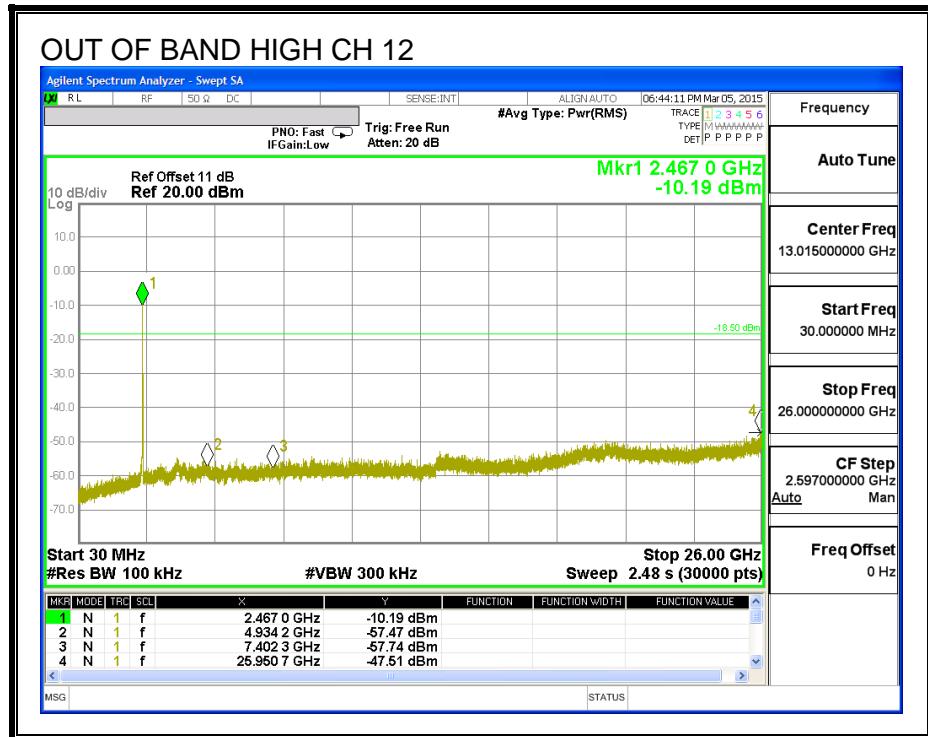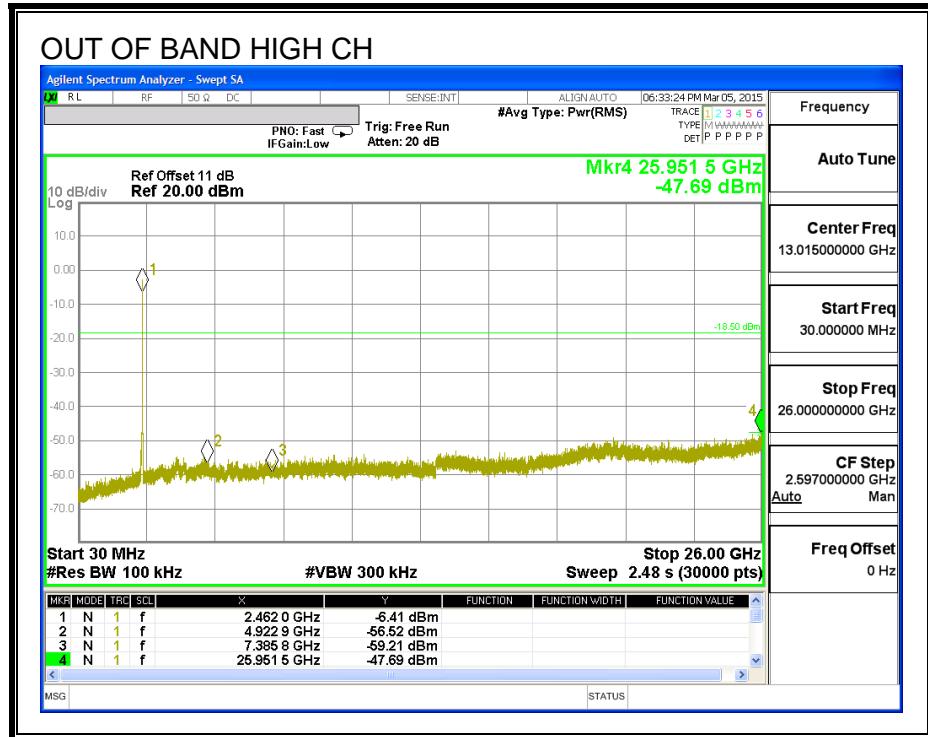


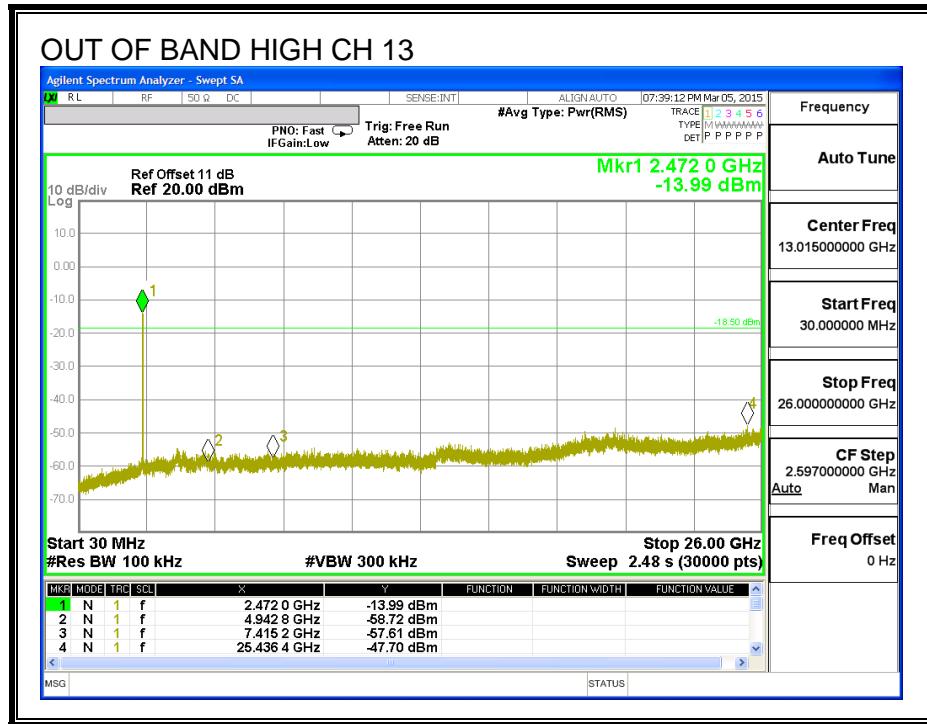

IN-BAND REFERENCE LEVEL, ANTENNA A

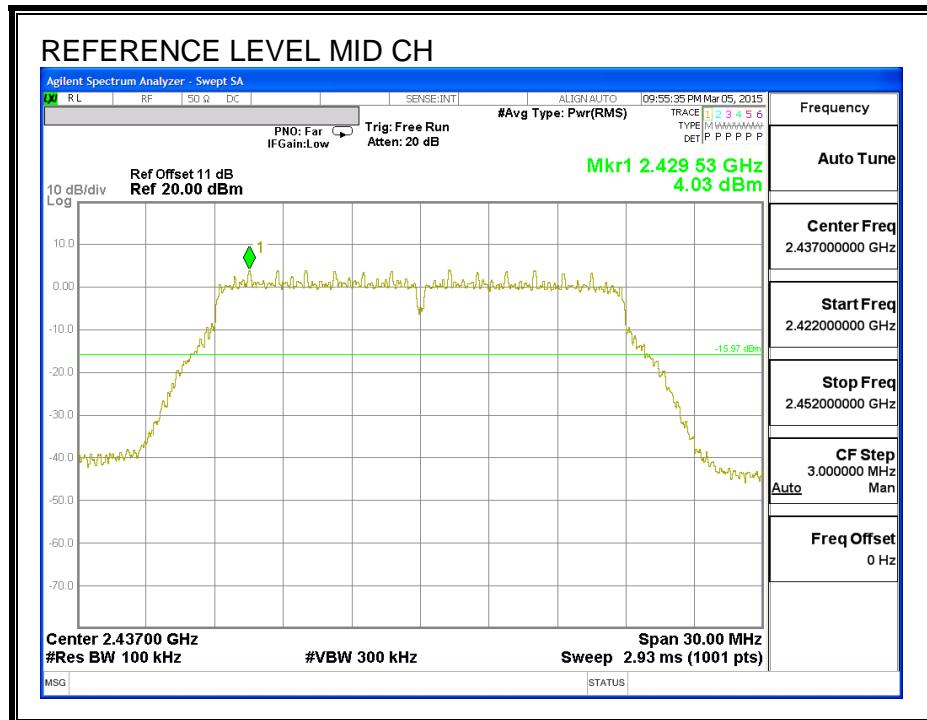

LOW CHANNEL BANDEDGE, ANTENNA A

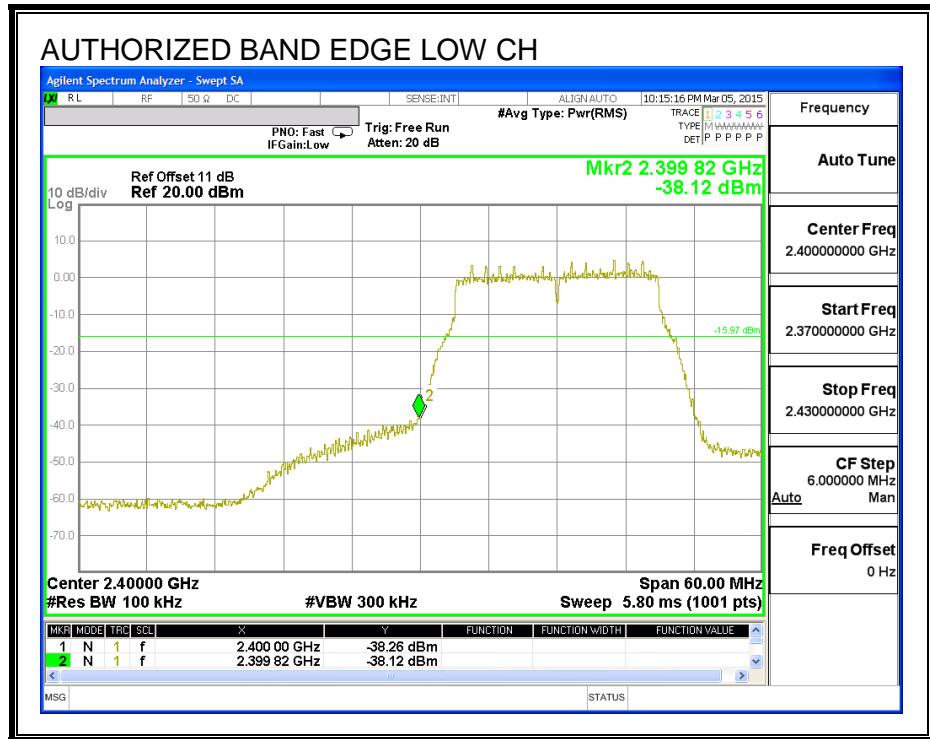

HIGH CHANNEL BANDEDGE, ANTENNA A

